Program :

```
#include <stdio.h>
int main() {
int num1, num2, sum;
int *ptr1 = &num1, *ptr2 = &num2;
printf("Enter two numbers: ");
scanf("%d %d", ptr1, ptr2);
sum = *ptr1 + *ptr2; // Dereference addition
printf("Sum = %d\n", sum);
return 0;
}
```
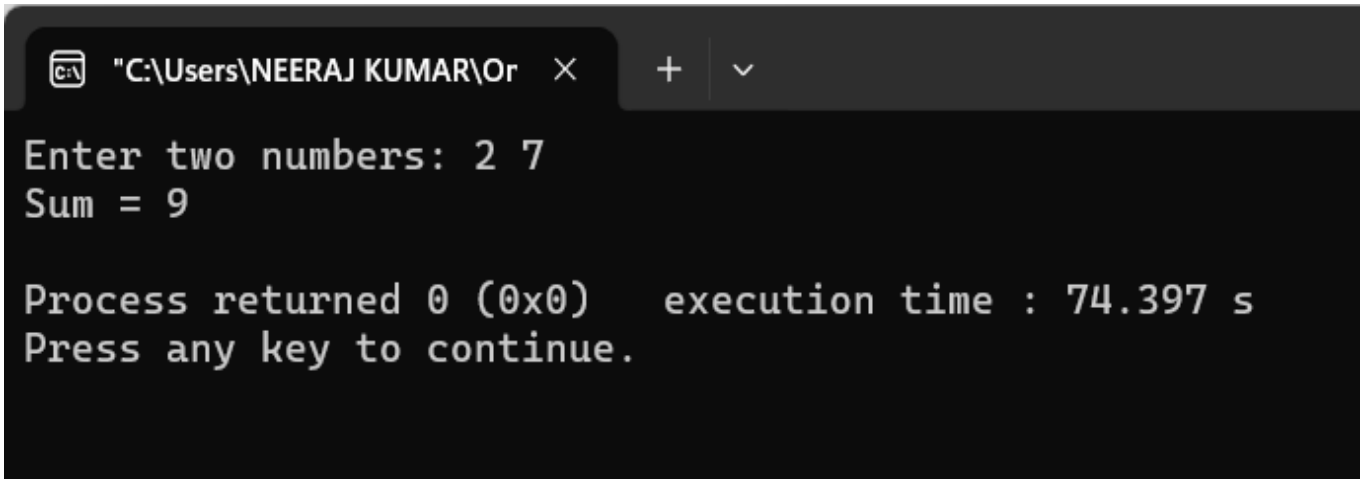
Output: