

“Debugging is twice as hard
as writing the code in the first
place.”

- Brian Kernighan

PHP 11. call_user_func_array(*uninitialized*, *uninitialized*)
/DEV/dagobert/vendor/laravel/framework/src/Illuminate
/Routing/Controllers/Controller.php:138

```
echo 'var: ' . $var;  
die('stop 001');
```

```
print_r($array);  
var_dump($array);
```

```
error_log('step 2 - var: ' . $var);  
debug_print_backtrace();
```

Xdebug


<http://xdebug.org/>


Xdebug Clients

<http://xdebug.org/docs/remote>

<https://github.com/Kindari/SublimeXdebug>

<https://github.com/martomo/SublimeTextXdebug>

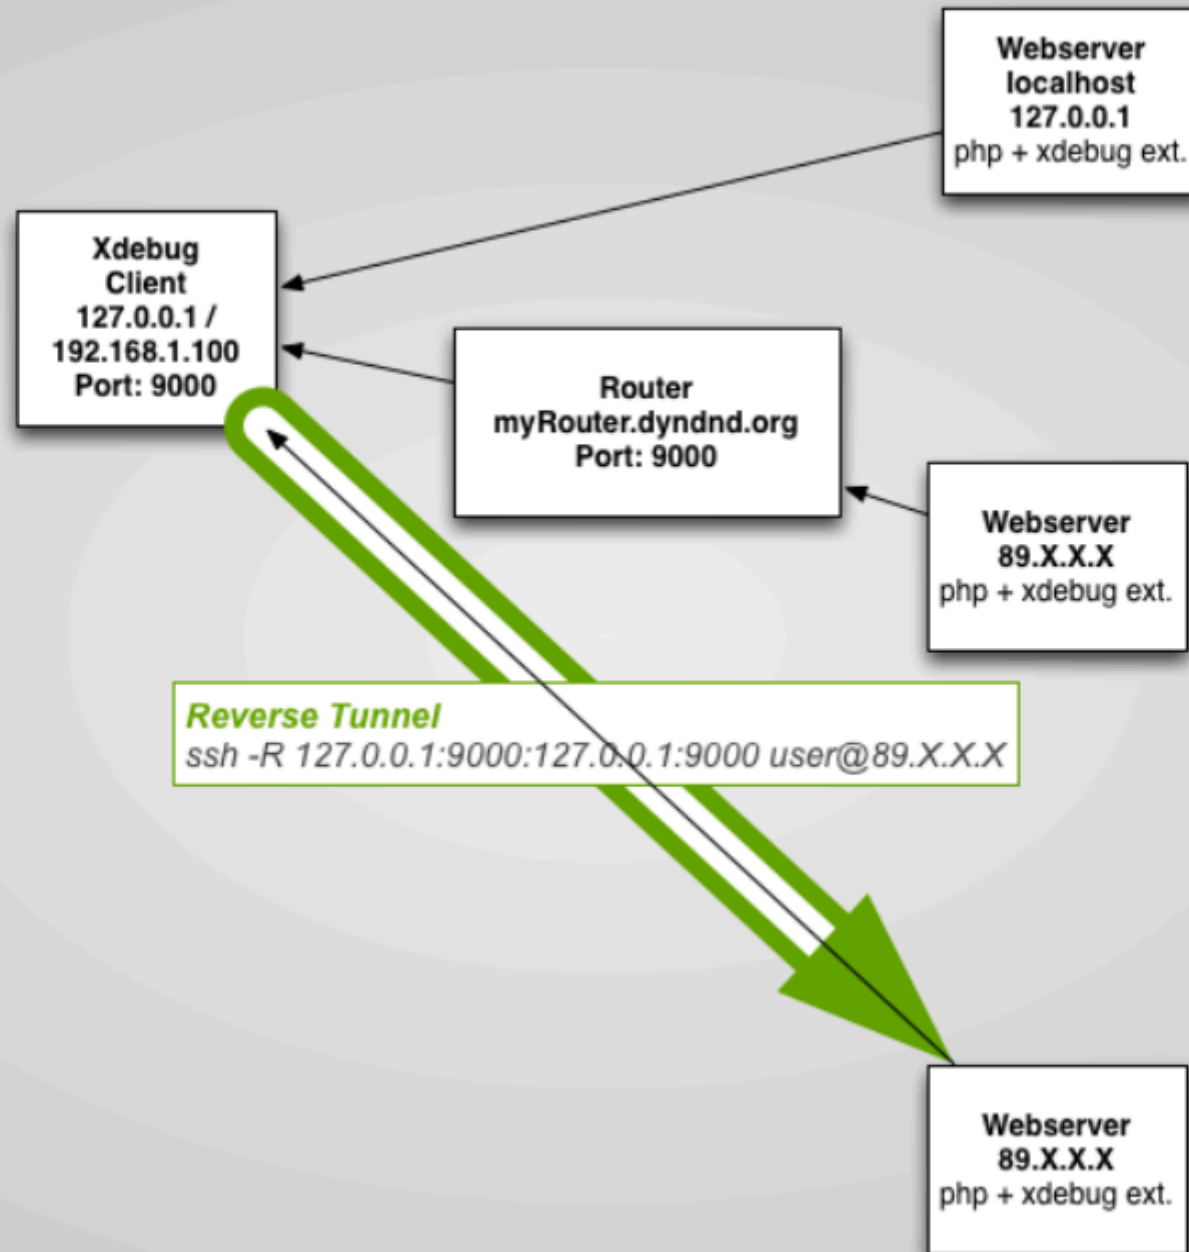

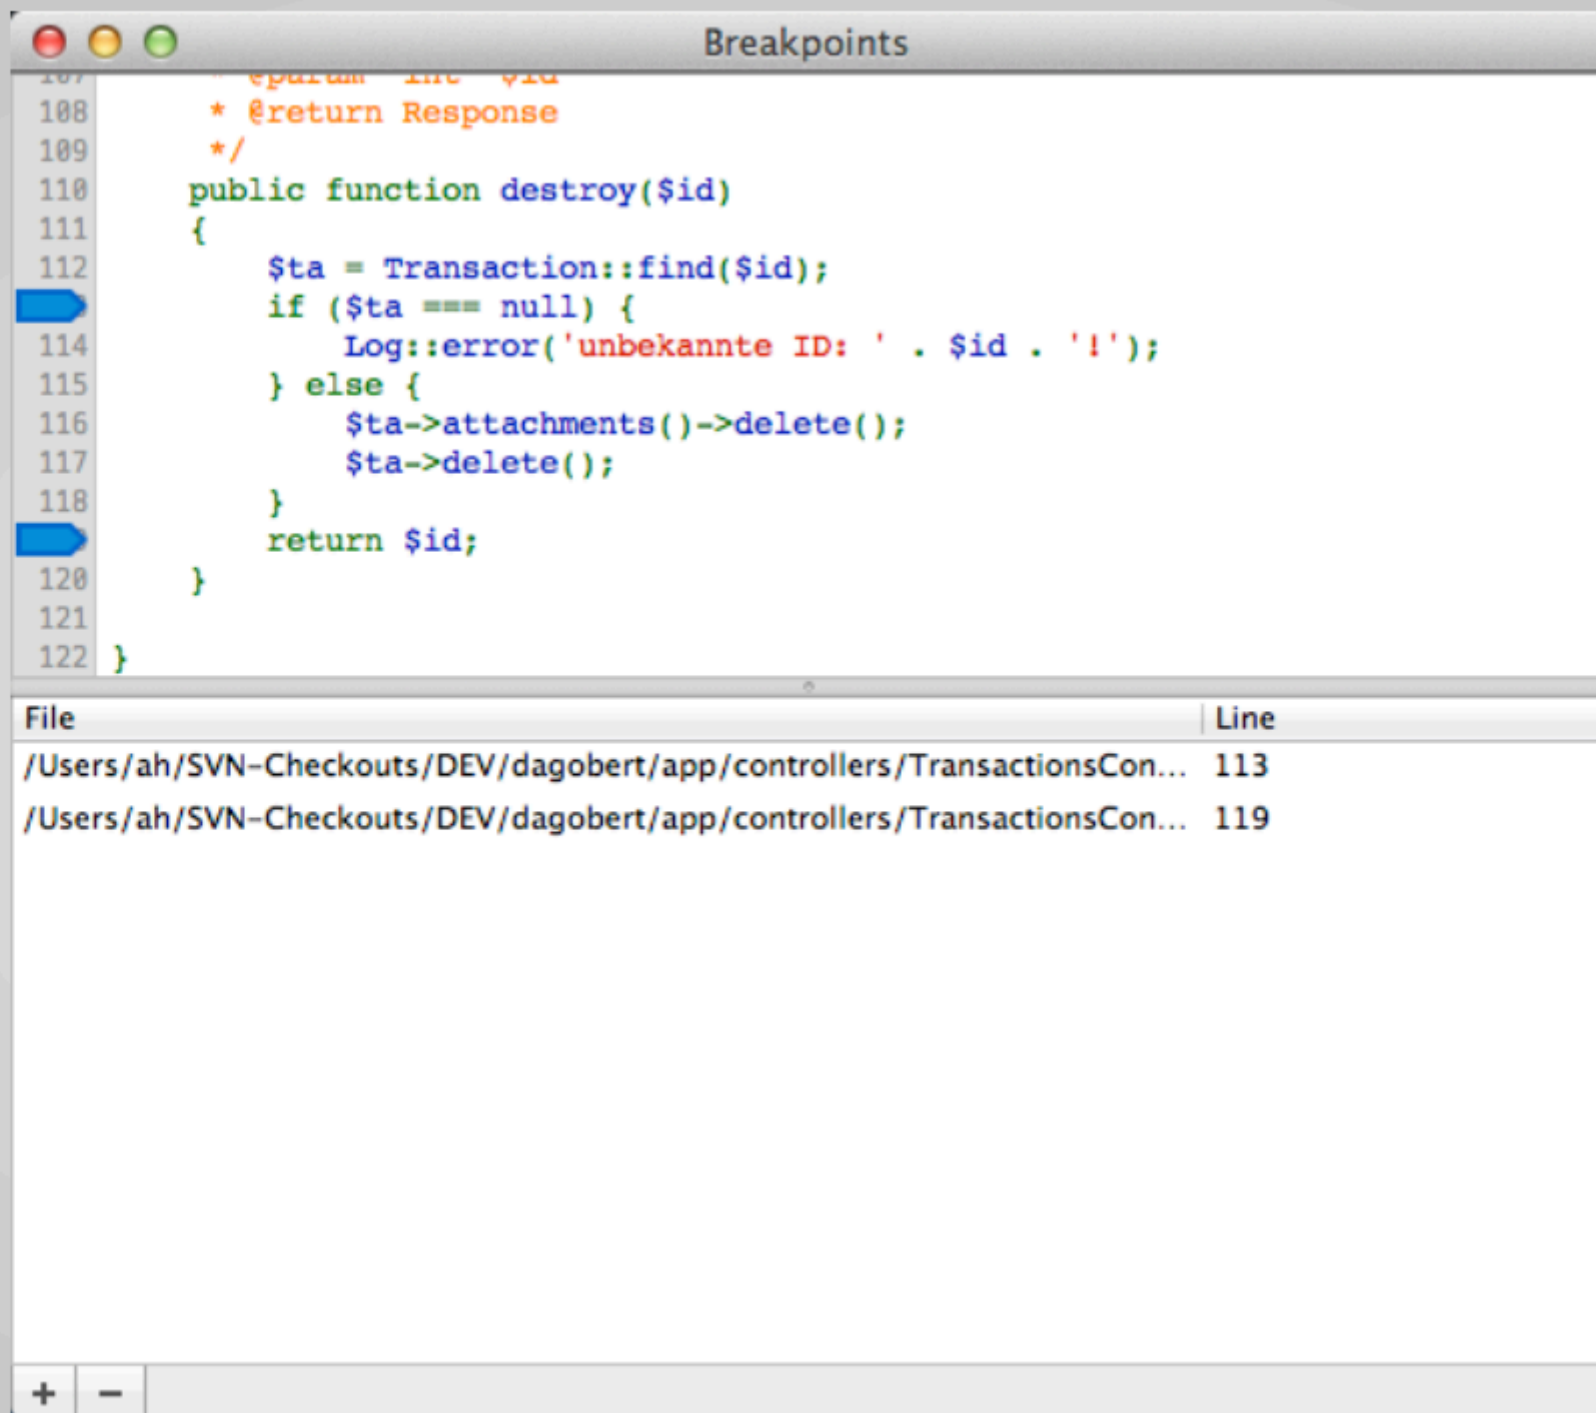

MacGDBp @ 9000

Attached

Variable	Value	Type	#	File	Line	Function
\$ta	(\$ta => (unguarded => 1	Transaction (object)	0	...ctionsController.php	113	TransactionsController->destroy
unguarded	1	bool	1	...ollers/Controller.php	138	call_user_func_array
snakeAttributes	1	bool	2	...ollers/Controller.php	138	Illuminate\Routing\Controllers\Controll...
▶ resolver	(resolver => ())	Illuminate\Database\D.	3	...ollers/Controller.php	115	Illuminate\Routing\Controllers\Controll...
▶ dispatcher	(dispatcher => ())	Illuminate\Events\Disp.	4	.../Routing/Router.php	985	Illuminate\Routing\{closure}
▶ booted	(booted => ())	array	5	...e/Routing/Route.php	80	call_user_func_array
▶ mutatorCache	(mutatorCache => ())	array	6	...e/Routing/Route.php	80	Illuminate\Routing\Route->callCallable
softDelete	1	bool	7	...e/Routing/Route.php	47	Illuminate\Routing\Route->run
connection		null	8	.../Routing/Router.php	1016	Illuminate\Routing\Router->dispatch
table		null	9	...tion/Application.php	530	Illuminate\Foundation\Application->dis...
primaryKey	id	string	10	...tion/Application.php	506	Illuminate\Foundation\Application->run
perPage	15	int	11	...ert/public/index.php	49	{main}
incrementing	1	bool				
timestamps	1	bool				
▼ attributes	(attributes => ())	array				
id	7	int				
user_id	0	int				
from	7	string				
date	2013-09-19 11:01:13	string				
due_date	2013-09-19 11:01:13	string				
reference		string				
attachment id	0	int				

```

103
104  /**
105   * Remove the specified resource from storage.
106   *
107   * @param int $id
108   * @return Response
109   */
110  public function destroy($id)
111  {
112      $ta = Transaction::find($id);
113      if ($ta === null) {

```

Break

Variable	Value	Type	#	File
▼ Sta	(Sta => (unguarded => 1	Transaction (object)	0	...ctionsCo
unguarded	1	bool	1	...ollers/Co
snakeAttributes	1	bool	2	...ollers/Co
▶ resolver	(resolver => ())	Illuminate\Database\D.	3	...ollers/Co
▶ dispatcher	(dispatcher => ())	Illuminate\Events\Disp.	4	.../Routing
▶ booted	(booted => ())	array	5	...e/Routin
▶ mutatorCache	(mutatorCache => ())	array	6	...e/Routin
softDelete	1	bool	7	...e/Routin
connection		null	8	.../Routing
table		null	9	...tion/App
primaryKey	id	string	10	...tion/App
perPage	15	int	11	...ert/publi
incrementing	1	bool		
timestamps	1	bool		
▼ attributes	(attributes => ())	array		
id	7	int		
user_id	0	int		
from	7	string		
date	2013-09-19 11:01:13	string		
due_date	2013-09-19 11:01:13	string		
reference		string		
attachment id	0	int		

MacGDBp @ 9000

eval \$i

Attached

Variable	Value
▼ \$ta	(\$ta => (
unguarded	1
snakeAttributes	1
▶ resolver	(resolver
▶ dispatcher	(dispatch
▶ booted	(booted =
▶ mutatorCache	(mutator
softDelete	1
connection	
table	
primaryKey	id
perPage	15
incrementing	1
timestamps	1
▼ attributes	(attribute => ()
id	7
user_id	0
from	7
date	2013-09-19 11:01:13
due_date	2013-09-19 11:01:13
reference	
attachment_id	0

Script to Evaluate:

```
Transaction::find($id)
```

Result:

```
(
  (null) => (
    unguarded => 1
    snakeAttributes => 1
    resolver => (
```

Close Evaluate

```
106 *
107 * @param int $id
108 * @return Response
109 */
110 public function destroy($id)
111 {
112     $ta = Transaction::find($id);
113     if ($ta === null) {
114         Log::error('unbekannte ID: ' . $id . '!');
115     } else {
116         $ta->attachments()->delete();
117     }
118 }
```

Break

Thank You

Andreas Heissenberger
<http://www.heissenberger.at>