

Deployment Assist Tool (DAT)

Automated DevSecOps Scan Report & AI Remediation Manifest

Generated: 6/1/2026, 10:12:59 PM

✖

Quality Gate FAILED — deployment blocked

Blocked by 14 CRITICAL, 153 HIGH finding(s) at the configured failOn severities (CRITICAL, HIGH).

0/100

READINESS SCORE

14

CRITICAL

153

HIGH

23

MEDIUM

12


LOW

How this score was calculated

0/100

— Blocked — critical/high findings present. $(100 - \sum (weight \times \log_2(1 + count)))$ per severity, clamped to 0–100)

Severity	Count	Weight	Penalty applied
CRITICAL	14	60	−234.4
HIGH	153	25	−181.7
MEDIUM	23	8	−36.7
LOW	12	2	−7.4
Total penalty			−460.2

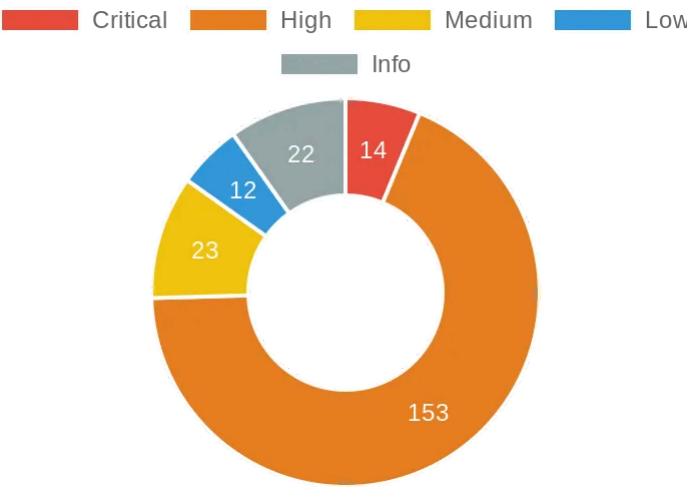

How to read this report

How DAT works

1. Detect the project ecosystem(s) and select the applicable scanners.
2. Preflight: verify the app has the inputs needed for a meaningful scan (POC→Enterprise readiness).
3. Run security/quality/test scanners AND per-component evaluators (fail-safe, robustness, coherence).
4. Deduplicate findings, compute the readiness score, and evaluate the Quality Gate.
5. Emit human reports (console / HTML / PDF) and a machine fix-manifest for coding agents (Claude Code).

The Quality Gate

The Quality Gate is the deploy decision. It FAILS when the scan finds any issue at a severity listed in `failOn` (default: CRITICAL, HIGH), or when a scanner errored. Otherwise it PASSES. This is independent of the readiness score. This run blocks on: **CRITICAL, HIGH**.

What the severities mean

CRITICAL	An exploitable flaw or breaking defect that puts production at immediate risk.	Must be fixed before deploying.
HIGH	A serious security or correctness issue likely to cause harm in production.	Fix before release; blocks the gate by default.
MEDIUM	A real weakness that increases risk but is not immediately exploitable.	Plan a fix soon; advisory by default.
LOW	A minor or cosmetic issue with limited impact.	Fix opportunistically.
INFO	Informational context, not a defect.	No action required.

What the finding categories mean

Security	A vulnerability an attacker could exploit.	Directly exposes the application or its data to attack.
Defect	The application behaves incorrectly (e.g. a failing test).	Broken logic reaches users and erodes trust.
Robustness	Missing resilience: no timeout, no error handling, no input validation.	The app fails unpredictably under load, bad input, or upstream outages.
Coherence	Components disagree (e.g. a UI call that an endpoint will reject).	Mismatches cause runtime failures that unit tests miss.
Fail-safe	A control lacks a safe default or handled failure path.	When something goes wrong, the app does the unsafe thing.
Best practice	Deviation from a hardening or quality convention.	Accumulated drift makes the system harder to secure and maintain.
Coverage gap	A check could not run (missing tool or input), so this area is unverified.	An unverified area is not the same as a safe one.

The readiness score

Range 0–100 (higher is healthier). Bands: **80–100** (green) — Healthy — minor issues only.; **50–79** (yellow) — Caution — address before the next deploy.; **0–49** (red) — Blocked — critical/high findings present.; Severity dominates volume (one CRITICAL outweighs many LOWs) and repeated findings of the same severity have diminishing impact. The score is a health indicator — the pass/fail decision is the Quality Gate, not the score.

Coverage gaps (checks that did not run)

These scanners were skipped, so the related risk areas are **unverified** (not necessarily safe):

- **SonarQube:** Required tool(s) not found on PATH: sonar-scanner
- **Qodo Cover-Agent:** Required tool(s) not found on PATH: cover-agent

- **Gitleaks (Secrets):** Required tool(s) not found on PATH: gitleaks

Detailed Findings & AI Remediation Data

Each finding shows its category and why it matters, plus a machine-readable remediation block for AI assistants (Claude Code, etc.).

Dockle Findings

INFO

DOCKLE-NO-IMAGE

Dockle

Description: Image 'project-image:latest' not found locally. Skipping Dockle scan.

```
// AI REMEDIATION MANIFEST
Target_File: Global/Dependency
Target_Line: N/A
Issue_Type: DOCKLE-NO-IMAGE
Severity: INFO
Category: n/a

Instruction: Fix the issue described below.
"Image 'project-image:latest' not found locally. Skipping Dockle scan."
```

Hadolint Findings

MEDIUM

DL3007

Hadolint

Description: Using latest is prone to errors if the image will ever update. Pin the version explicitly to a release tag

Location: testing_data/Dockerfile:1

```
// AI REMEDIATION MANIFEST
Target_File: testing_data/Dockerfile
Target_Line: 1
Issue_Type: DL3007
Severity: MEDIUM
Category: n/a

Instruction: Fix the issue described below.
"Using latest is prone to errors if the image will ever update. Pin the
version explicitly to a release tag"
```

Description: Pin versions in apt get install. Instead of `apt-get install <package>` use `apt-get install <package>=<version>`

Location: testing_data/Dockerfile:5

```
// AI REMEDIATION MANIFEST
Target_File: testing_data/Dockerfile
Target_Line: 5
Issue_Type: DL3008
Severity: MEDIUM
Category: n/a

Instruction: Fix the issue described below.
"Pin versions in apt get install. Instead of `apt-get install <package>`
use `apt-get install <package>=<version>`"
```

Description: Avoid additional packages by specifying `--no-install-recommends`

Location: testing_data/Dockerfile:5

```
// AI REMEDIATION MANIFEST
Target_File: testing_data/Dockerfile
Target_Line: 5
Issue_Type: DL3015
Severity: LOW
Category: n/a

Instruction: Fix the issue described below.
"Avoid additional packages by specifying `--no-install-recommends`"
```

LOW**DL3009**

Hadolint

Description: Delete the apt lists (/var/lib/apt/lists) after installing something

Location: testing_data/Dockerfile:5

```
// AI REMEDIATION MANIFEST
Target_File: testing_data/Dockerfile
Target_Line: 5
Issue_Type: DL3009
Severity: LOW
Category: n/a

Instruction: Fix the issue described below.
"Delete the apt lists (/var/lib/apt/lists) after installing something"
```

MEDIUM**DL3014**

Hadolint

Description: Use the `-y` switch to avoid manual input `apt-get -y install <package>`

Location: testing_data/Dockerfile:5

```
// AI REMEDIATION MANIFEST
Target_File: testing_data/Dockerfile
Target_Line: 5
Issue_Type: DL3014
Severity: MEDIUM
Category: n/a

Instruction: Fix the issue described below.
"Use the -y switch to avoid manual input apt-get -y install <package>"
```

OSV-Scanner Findings

HIGH**GHSA-4r6h-8v6p-xvw6**

OSV-Scanner

Description: Package xlsx@0.18.5 is vulnerable: Prototype Pollution in sheetJS

Location: /Users/heisenberg/Projects/deployment_assist_tool/package-lock.json

```
// AI REMEDIATION MANIFEST
Target_File: /Users/heisenberg/Projects/deployment_assist_tool/package-lock.json
Target_Line: N/A
Issue_Type: GHSA-4r6h-8v6p-xvw6
Severity: HIGH
Category: n/a
```

Instruction: Fix the issue described below.
"Package xlsx@0.18.5 is vulnerable: Prototype Pollution in sheetJS"

HIGH**GHSA-5pgg-2g8v-p4x9**

OSV-Scanner

Description: Package xlsx@0.18.5 is vulnerable: SheetJS Regular Expression Denial of Service (ReDoS)

Location: /Users/heisenberg/Projects/deployment_assist_tool/package-lock.json

```
// AI REMEDIATION MANIFEST
Target_File: /Users/heisenberg/Projects/deployment_assist_tool/package-lock.json
Target_Line: N/A
Issue_Type: GHSA-5pgg-2g8v-p4x9
Severity: HIGH
Category: n/a
```

Instruction: Fix the issue described below.
"Package xlsx@0.18.5 is vulnerable: SheetJS Regular Expression Denial of Service (ReDoS)"

Description: [UNREACHABLE] Package body-parser@1.18.2 is vulnerable: body-parser vulnerable to denial of service when url encoding is enabled

Location:

/Users/heisenberg/Projects/deployment_assist_tool/testing_data/package-lock.json

```
// AI REMEDIATION MANIFEST
Target_File:
/Users/heisenberg/Projects/deployment_assist_tool/testing_data/package-lock.json
Target_Line: N/A
Issue_Type: GHSA-qwcr-r2fm-qrc7
Severity: INFO
Category: n/a
```

Instruction: Fix the issue described below.
"[UNREACHABLE] Package body-parser@1.18.2 is vulnerable: body-parser vulnerable to denial of service when url encoding is enabled"

Description: [UNREACHABLE] Package cookie@0.3.1 is vulnerable: cookie accepts cookie name, path, and domain with out of bounds characters

Location:

/Users/heisenberg/Projects/deployment_assist_tool/testing_data/package-lock.json

```
// AI REMEDIATION MANIFEST
Target_File:
/Users/heisenberg/Projects/deployment_assist_tool/testing_data/package-lock.json
Target_Line: N/A
Issue_Type: GHSA-pxg6-pf52-xh8x
Severity: INFO
Category: n/a
```

Instruction: Fix the issue described below.
"[UNREACHABLE] Package cookie@0.3.1 is vulnerable: cookie accepts cookie name, path, and domain with out of bounds characters"

LOW**GHSA-qw6h-vgh9-j6wx**

OSV-Scanner

Description: Package express@4.16.0 is vulnerable: express vulnerable to XSS via response.redirect()

Location:

/Users/heisenberg/Projects/deployment_assist_tool/testing_data/package-lock.json

```
// AI REMEDIATION MANIFEST
Target_File:
/Users/heisenberg/Projects/deployment_assist_tool/testing_data/package-lock.json
Target_Line: N/A
Issue_Type: GHSA-qw6h-vgh9-j6wx
Severity: LOW
Category: n/a
```

Instruction: Fix the issue described below.
"Package express@4.16.0 is vulnerable: express vulnerable to XSS via response.redirect()"

HIGH**GHSA-rv95-896h-c2vc**

OSV-Scanner

Description: Package express@4.16.0 is vulnerable: Express.js Open Redirect in malformed URLs

Location:

/Users/heisenberg/Projects/deployment_assist_tool/testing_data/package-lock.json

```
// AI REMEDIATION MANIFEST
Target_File:
/Users/heisenberg/Projects/deployment_assist_tool/testing_data/package-lock.json
Target_Line: N/A
Issue_Type: GHSA-rv95-896h-c2vc
Severity: HIGH
Category: n/a
```

Instruction: Fix the issue described below.
"Package express@4.16.0 is vulnerable: Express.js Open Redirect in malformed URLs"

HIGH**GHSA-29mw-wpgm-hmr9**

OSV-Scanner

Description: Package lodash@4.17.15 is vulnerable: Regular Expression Denial of Service (ReDoS) in lodash

Location:

/Users/heisenberg/Projects/deployment_assist_tool/testing_data/package-lock.json

```
// AI REMEDIATION MANIFEST
Target_File:
/Users/heisenberg/Projects/deployment_assist_tool/testing_data/package-lock.json
Target_Line: N/A
Issue_Type: GHSA-29mw-wpgm-hmr9
Severity: HIGH
Category: n/a
```

Instruction: Fix the issue described below.
"Package lodash@4.17.15 is vulnerable: Regular Expression Denial of Service (ReDoS) in lodash"

HIGH**GHSA-35jh-r3h4-6jhm**

OSV-Scanner

Description: Package lodash@4.17.15 is vulnerable: Command Injection in lodash

Location:

/Users/heisenberg/Projects/deployment_assist_tool/testing_data/package-lock.json

```
// AI REMEDIATION MANIFEST
Target_File:
/Users/heisenberg/Projects/deployment_assist_tool/testing_data/package-lock.json
Target_Line: N/A
Issue_Type: GHSA-35jh-r3h4-6jhm
Severity: HIGH
Category: n/a
```

Instruction: Fix the issue described below.
"Package lodash@4.17.15 is vulnerable: Command Injection in lodash"

HIGH**GHSA-f23m-r3pf-42rh**

OSV-Scanner

Description: Package lodash@4.17.15 is vulnerable: lodash vulnerable to Prototype Pollution via array path bypass in `\_.unset` and `\_.omit`

Location:

/Users/heisenberg/Projects/deployment_assist_tool/testing_data/package-lock.json

```
// AI REMEDIATION MANIFEST
Target_File:
/Users/heisenberg/Projects/deployment_assist_tool/testing_data/package-lock.json
Target_Line: N/A
Issue_Type: GHSA-f23m-r3pf-42rh
Severity: HIGH
Category: n/a
```

Instruction: Fix the issue described below.
"Package lodash@4.17.15 is vulnerable: lodash vulnerable to Prototype Pollution via array path bypass in `\_.unset` and `\_.omit`"

HIGH**GHSA-p6mc-m468-83gw**

OSV-Scanner

Description: Package lodash@4.17.15 is vulnerable: Prototype Pollution in lodash

Location:

/Users/heisenberg/Projects/deployment_assist_tool/testing_data/package-lock.json

```
// AI REMEDIATION MANIFEST
Target_File:
/Users/heisenberg/Projects/deployment_assist_tool/testing_data/package-lock.json
Target_Line: N/A
Issue_Type: GHSA-p6mc-m468-83gw
Severity: HIGH
Category: n/a
```

Instruction: Fix the issue described below.
"Package lodash@4.17.15 is vulnerable: Prototype Pollution in lodash"

HIGH**GHSA-r5fr-rjxr-66jc**

OSV-Scanner

Description: Package lodash@4.17.15 is vulnerable: lodash vulnerable to Code Injection via `\_.template` imports key names

Location:

/Users/heisenberg/Projects/deployment_assist_tool/testing_data/package-lock.json

```
// AI REMEDIATION MANIFEST
Target_File:
/Users/heisenberg/Projects/deployment_assist_tool/testing_data/package-lock.json
Target_Line: N/A
Issue_Type: GHSA-r5fr-rjxr-66jc
Severity: HIGH
Category: n/a
```

Instruction: Fix the issue described below.
"Package lodash@4.17.15 is vulnerable: lodash vulnerable to Code Injection via `\_.template` imports key names"

HIGH**GHSA-xxjr-mmjv-4gpg**

OSV-Scanner

Description: Package lodash@4.17.15 is vulnerable: Lodash has Prototype Pollution Vulnerability in `\_.unset` and `\_.omit` functions

Location:

/Users/heisenberg/Projects/deployment_assist_tool/testing_data/package-lock.json

```
// AI REMEDIATION MANIFEST
Target_File:
/Users/heisenberg/Projects/deployment_assist_tool/testing_data/package-lock.json
Target_Line: N/A
Issue_Type: GHSA-xxjr-mmjv-4gpg
Severity: HIGH
Category: n/a
```

Instruction: Fix the issue described below.
"Package lodash@4.17.15 is vulnerable: Lodash has Prototype Pollution Vulnerability in `\_.unset` and `\_.omit` functions"

Description: [UNREACHABLE] Package path-to-regexp@0.1.7 is vulnerable: path-to-regexp vulnerable to Regular Expression Denial of Service via multiple route parameters

Location:

/Users/heisenberg/Projects/deployment_assist_tool/testing_data/package-lock.json

```
// AI REMEDIATION MANIFEST
Target_File:
/Users/heisenberg/Projects/deployment_assist_tool/testing_data/package-lock.json
Target_Line: N/A
Issue_Type: GHSA-37ch-88jc-xwx2
Severity: INFO
Category: n/a
```

Instruction: Fix the issue described below.
"[UNREACHABLE] Package path-to-regexp@0.1.7 is vulnerable: path-to-regexp vulnerable to Regular Expression Denial of Service via multiple route parameters"

Description: [UNREACHABLE] Package path-to-regexp@0.1.7 is vulnerable: path-to-regexp outputs backtracking regular expressions

Location:

/Users/heisenberg/Projects/deployment_assist_tool/testing_data/package-lock.json

```
// AI REMEDIATION MANIFEST
Target_File:
/Users/heisenberg/Projects/deployment_assist_tool/testing_data/package-lock.json
Target_Line: N/A
Issue_Type: GHSA-9wv6-86v2-598j
Severity: INFO
Category: n/a
```

Instruction: Fix the issue described below.
"[UNREACHABLE] Package path-to-regexp@0.1.7 is vulnerable: path-to-regexp outputs backtracking regular expressions"

Description: [UNREACHABLE] Package path-to-regexp@0.1.7 is vulnerable: path-to-regexp contains a ReDoS

Location:

/Users/heisenberg/Projects/deployment_assist_tool/testing_data/package-lock.json

```
// AI REMEDIATION MANIFEST
Target_File:
/Users/heisenberg/Projects/deployment_assist_tool/testing_data/package-lock.json
Target_Line: N/A
Issue_Type: GHSA-rhx6-c78j-4q9w
Severity: INFO
Category: n/a
```

Instruction: Fix the issue described below.
"[UNREACHABLE] Package path-to-regexp@0.1.7 is vulnerable: path-to-regexp contains a ReDoS"

Description: [UNREACHABLE] Package qs@6.5.1 is vulnerable: qs's arrayLimit bypass in its bracket notation allows DoS via memory exhaustion

Location:

/Users/heisenberg/Projects/deployment_assist_tool/testing_data/package-lock.json

```
// AI REMEDIATION MANIFEST
Target_File:
/Users/heisenberg/Projects/deployment_assist_tool/testing_data/package-lock.json
Target_Line: N/A
Issue_Type: GHSA-6rw7-vpxm-498p
Severity: INFO
Category: n/a
```

Instruction: Fix the issue described below.
"[UNREACHABLE] Package qs@6.5.1 is vulnerable: qs's arrayLimit bypass in its bracket notation allows DoS via memory exhaustion"

Description: [UNREACHABLE] Package qs@6.5.1 is vulnerable: qs vulnerable to Prototype Pollution

Location:

/Users/heisenberg/Projects/deployment_assist_tool/testing_data/package-lock.json

```
// AI REMEDIATION MANIFEST
Target_File:
/Users/heisenberg/Projects/deployment_assist_tool/testing_data/package-lock.json
Target_Line: N/A
Issue_Type: GHSA-hrpp-h998-j3pp
Severity: INFO
Category: n/a
```

Instruction: Fix the issue described below.
"[UNREACHABLE] Package qs@6.5.1 is vulnerable: qs vulnerable to Prototype Pollution"

Description: [UNREACHABLE] Package send@0.16.0 is vulnerable: send vulnerable to template injection that can lead to XSS

Location:

/Users/heisenberg/Projects/deployment_assist_tool/testing_data/package-lock.json

```
// AI REMEDIATION MANIFEST
Target_File:
/Users/heisenberg/Projects/deployment_assist_tool/testing_data/package-lock.json
Target_Line: N/A
Issue_Type: GHSA-m6fv-jmcg-4jfg
Severity: INFO
Category: n/a
```

Instruction: Fix the issue described below.
"[UNREACHABLE] Package send@0.16.0 is vulnerable: send vulnerable to template injection that can lead to XSS"

Description: [UNREACHABLE] Package serve-static@1.13.0 is vulnerable: serve-static vulnerable to template injection that can lead to XSS

Location:

/Users/heisenberg/Projects/deployment_assist_tool/testing_data/package-lock.json

```
// AI REMEDIATION MANIFEST
Target_File:
/Users/heisenberg/Projects/deployment_assist_tool/testing_data/package-lock.json
Target_Line: N/A
Issue_Type: GHSA-cm22-4g7w-348p
Severity: INFO
Category: n/a
```

Instruction: Fix the issue described below.
"[UNREACHABLE] Package serve-static@1.13.0 is vulnerable: serve-static vulnerable to template injection that can lead to XSS"

Semgrep Findings

Description: Avoid using console.log() in production code. Use a structured logging library like Winston or Pino.

Location: scripts/create-features-excel.js:60

```
// AI REMEDIATION MANIFEST
Target_File: scripts/create-features-excel.js
Target_Line: 60
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a
```

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging library like Winston or Pino."

HIGH**python.lang.security.audit.dynamic-urllib-use-detected.dynamic-urllib-use-detected**

Semgrep

Description: Detected a dynamic value being used with urllib. urllib supports 'file://' schemes, so a dynamic value controlled by a malicious actor may allow them to read arbitrary files. Audit uses of urllib calls to ensure user data cannot control the URLs, or consider using the 'requests' library instead.

Location: scripts/generate_architecture_png.py:19

```
// AI REMEDIATION MANIFEST
Target_File: scripts/generate_architecture_png.py
Target_Line: 19
Issue_Type: python.lang.security.audit.dynamic-urllib-use-detected.dynamic-urllib-use-detected
Severity:    HIGH
Category:    n/a
```

Instruction: Fix the issue described below.
"Detected a dynamic value being used with urllib. urllib supports 'file://' schemes, so a dynamic value controlled by a malicious actor may allow them to read arbitrary files. Audit uses of urllib calls to ensure user data cannot control the URLs, or consider using the 'requests' library instead."

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using console.log() in production code. Use a structured logging library like Winston or Pino.

Location: scripts/mock-feedback-analytics.js:3

```
// AI REMEDIATION MANIFEST
Target_File: scripts/mock-feedback-analytics.js
Target_Line: 3
Issue_Type: rules.dat-no-console-log
Severity:    HIGH
Category:    n/a
```

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging library like Winston or Pino."

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `scripts/mock-feedback-analytics.js:4`

```
// AI REMEDIATION MANIFEST
Target_File: scripts/mock-feedback-analytics.js
Target_Line: 4
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `scripts/mock-feedback-analytics.js:15`

```
// AI REMEDIATION MANIFEST
Target_File: scripts/mock-feedback-analytics.js
Target_Line: 15
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `scripts/mock-feedback-analytics.js:16`

```
// AI REMEDIATION MANIFEST
Target_File: scripts/mock-feedback-analytics.js
Target_Line: 16
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `scripts/mock-feedback-analytics.js:17`

```
// AI REMEDIATION MANIFEST
Target_File: scripts/mock-feedback-analytics.js
Target_Line: 17
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `scripts/mock-feedback-analytics.js:18`

```
// AI REMEDIATION MANIFEST
Target_File: scripts/mock-feedback-analytics.js
Target_Line: 18
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `scripts/mock-feedback-analytics.js:19`

```
// AI REMEDIATION MANIFEST
Target_File: scripts/mock-feedback-analytics.js
Target_Line: 19
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `scripts/mock-feedback-analytics.js:21`

```
// AI REMEDIATION MANIFEST
Target_File: scripts/mock-feedback-analytics.js
Target_Line: 21
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `scripts/mock-feedback-analytics.js:22`

```
// AI REMEDIATION MANIFEST
Target_File: scripts/mock-feedback-analytics.js
Target_Line: 22
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `scripts/mock-feedback-analytics.js:23`

```
// AI REMEDIATION MANIFEST
Target_File: scripts/mock-feedback-analytics.js
Target_Line: 23
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `scripts/mock-feedback-analytics.js:24`

```
// AI REMEDIATION MANIFEST
Target_File: scripts/mock-feedback-analytics.js
Target_Line: 24
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `scripts/mock-feedback-analytics.js:26`

```
// AI REMEDIATION MANIFEST
Target_File: scripts/mock-feedback-analytics.js
Target_Line: 26
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `scripts/mock-feedback-analytics.js:27`

```
// AI REMEDIATION MANIFEST
Target_File: scripts/mock-feedback-analytics.js
Target_Line: 27
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `scripts/mock-feedback-analytics.js:28`

```
// AI REMEDIATION MANIFEST
Target_File: scripts/mock-feedback-analytics.js
Target_Line: 28
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `scripts/read-excel.js:4`

```
// AI REMEDIATION MANIFEST
Target_File: scripts/read-excel.js
Target_Line: 4
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `scripts/read-excel.js:9`

```
// AI REMEDIATION MANIFEST
Target_File: scripts/read-excel.js
Target_Line: 9
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `scripts/read-excel.js:10`

```
// AI REMEDIATION MANIFEST
Target_File: scripts/read-excel.js
Target_Line: 10
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```


HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `scripts/simulate-webhook.js:31`

```
// AI REMEDIATION MANIFEST
Target_File: scripts/simulate-webhook.js
Target_Line: 31
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `scripts/simulate-webhook.js:46`

```
// AI REMEDIATION MANIFEST
Target_File: scripts/simulate-webhook.js
Target_Line: 46
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `scripts/simulate-webhook.js:47`

```
// AI REMEDIATION MANIFEST
Target_File: scripts/simulate-webhook.js
Target_Line: 47
Issue_Type: rules.dat-no-console-log
Severity:    HIGH
Category:    n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `scripts/update-excel.js:126`

```
// AI REMEDIATION MANIFEST
Target_File: scripts/update-excel.js
Target_Line: 126
Issue_Type: rules.dat-no-console-log
Severity:    HIGH
Category:    n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `scripts/update-scanners.js:18`

```
// AI REMEDIATION MANIFEST
Target_File: scripts/update-scanners.js
Target_Line: 18
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `src/index.ts:55`

```
// AI REMEDIATION MANIFEST
Target_File: src/index.ts
Target_Line: 55
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

Description: Avoid using `process.exit()` in application code. It abruptly terminates the Node.js process. Throw an error instead.

Location: `src/index.ts:56`

```
// AI REMEDIATION MANIFEST
Target_File: src/index.ts
Target_Line: 56
Issue_Type: rules.dat-no-process-exit
Severity: CRITICAL
Category: n/a

Instruction: Fix the issue described below.
"Avoid using process.exit() in application code. It abruptly terminates
the Node.js process. Throw an error instead."
```

Description: Avoid using `process.exit()` in application code. It abruptly terminates the Node.js process. Throw an error instead.

Location: `src/index.ts:62`

```
// AI REMEDIATION MANIFEST
Target_File: src/index.ts
Target_Line: 62
Issue_Type: rules.dat-no-process-exit
Severity: CRITICAL
Category: n/a

Instruction: Fix the issue described below.
"Avoid using process.exit() in application code. It abruptly terminates
the Node.js process. Throw an error instead."
```

Description: Avoid using `process.exit()` in application code. It abruptly terminates the Node.js process. Throw an error instead.

Location: `src/index.ts:66`

```
// AI REMEDIATION MANIFEST
Target_File: src/index.ts
Target_Line: 66
Issue_Type: rules.dat-no-process-exit
Severity: CRITICAL
Category: n/a

Instruction: Fix the issue described below.
"Avoid using process.exit() in application code. It abruptly terminates
the Node.js process. Throw an error instead."
```

Description: Avoid using `process.exit()` in application code. It abruptly terminates the Node.js process. Throw an error instead.

Location: `src/index.ts:68`

```
// AI REMEDIATION MANIFEST
Target_File: src/index.ts
Target_Line: 68
Issue_Type: rules.dat-no-process-exit
Severity: CRITICAL
Category: n/a

Instruction: Fix the issue described below.
"Avoid using process.exit() in application code. It abruptly terminates
the Node.js process. Throw an error instead."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `src/index.ts:71`

```
// AI REMEDIATION MANIFEST
Target_File: src/index.ts
Target_Line: 71
Issue_Type: rules.dat-no-console-log
Severity:    HIGH
Category:    n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

CRITICAL**rules.dat-no-process-exit**

Semgrep

Description: Avoid using `process.exit()` in application code. It abruptly terminates the Node.js process. Throw an error instead.

Location: `src/index.ts:72`

```
// AI REMEDIATION MANIFEST
Target_File: src/index.ts
Target_Line: 72
Issue_Type: rules.dat-no-process-exit
Severity:    CRITICAL
Category:    n/a

Instruction: Fix the issue described below.
"Avoid using process.exit() in application code. It abruptly terminates
the Node.js process. Throw an error instead."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `src/index.ts:87`

```
// AI REMEDIATION MANIFEST
Target_File: src/index.ts
Target_Line: 87
Issue_Type: rules.dat-no-console-log
Severity:    HIGH
Category:    n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

CRITICAL**rules.dat-no-process-exit**

Semgrep

Description: Avoid using `process.exit()` in application code. It abruptly terminates the Node.js process. Throw an error instead.

Location: `src/index.ts:88`

```
// AI REMEDIATION MANIFEST
Target_File: src/index.ts
Target_Line: 88
Issue_Type: rules.dat-no-process-exit
Severity:    CRITICAL
Category:    n/a

Instruction: Fix the issue described below.
"Avoid using process.exit() in application code. It abruptly terminates
the Node.js process. Throw an error instead."
```

CRITICAL**rules.dat-no-process-exit**

Semgrep

Description: Avoid using `process.exit()` in application code. It abruptly terminates the Node.js process. Throw an error instead.

Location: `src/index.ts:98`

```
// AI REMEDIATION MANIFEST
Target_File: src/index.ts
Target_Line: 98
Issue_Type: rules.dat-no-process-exit
Severity: CRITICAL
Category: n/a
```

Instruction: Fix the issue described below.
"Avoid using `process.exit()` in application code. It abruptly terminates the Node.js process. Throw an error instead."

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `src/index.ts:100`

```
// AI REMEDIATION MANIFEST
Target_File: src/index.ts
Target_Line: 100
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a
```

Instruction: Fix the issue described below.
"Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino."

CRITICAL**rules.dat-no-process-exit**

Semgrep

Description: Avoid using `process.exit()` in application code. It abruptly terminates the Node.js process. Throw an error instead.

Location: `src/index.ts:101`

```
// AI REMEDIATION MANIFEST
Target_File: src/index.ts
Target_Line: 101
Issue_Type: rules.dat-no-process-exit
Severity: CRITICAL
Category: n/a
```

Instruction: Fix the issue described below.
"Avoid using `process.exit()` in application code. It abruptly terminates the Node.js process. Throw an error instead."

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `src/index.ts:118`

```
// AI REMEDIATION MANIFEST
Target_File: src/index.ts
Target_Line: 118
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a
```

Instruction: Fix the issue described below.
"Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino."

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `src/index.ts:119`

```
// AI REMEDIATION MANIFEST
Target_File: src/index.ts
Target_Line: 119
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `src/index.ts:120`

```
// AI REMEDIATION MANIFEST
Target_File: src/index.ts
Target_Line: 120
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `src/index.ts:121`

```
// AI REMEDIATION MANIFEST
Target_File: src/index.ts
Target_Line: 121
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `src/index.ts:122`

```
// AI REMEDIATION MANIFEST
Target_File: src/index.ts
Target_Line: 122
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `src/index.ts:123`

```
// AI REMEDIATION MANIFEST
Target_File: src/index.ts
Target_Line: 123
Issue_Type: rules.dat-no-console-log
Severity:    HIGH
Category:    n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

CRITICAL**rules.dat-no-process-exit**

Semgrep

Description: Avoid using `process.exit()` in application code. It abruptly terminates the Node.js process. Throw an error instead.

Location: `src/index.ts:124`

```
// AI REMEDIATION MANIFEST
Target_File: src/index.ts
Target_Line: 124
Issue_Type: rules.dat-no-process-exit
Severity:    CRITICAL
Category:    n/a

Instruction: Fix the issue described below.
"Avoid using process.exit() in application code. It abruptly terminates
the Node.js process. Throw an error instead."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `src/index.ts:126`

```
// AI REMEDIATION MANIFEST
Target_File: src/index.ts
Target_Line: 126
Issue_Type: rules.dat-no-console-log
Severity:    HIGH
Category:    n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

CRITICAL**rules.dat-no-process-exit**

Semgrep

Description: Avoid using `process.exit()` in application code. It abruptly terminates the Node.js process. Throw an error instead.

Location: `src/index.ts:127`

```
// AI REMEDIATION MANIFEST
Target_File: src/index.ts
Target_Line: 127
Issue_Type: rules.dat-no-process-exit
Severity:    CRITICAL
Category:    n/a

Instruction: Fix the issue described below.
"Avoid using process.exit() in application code. It abruptly terminates
the Node.js process. Throw an error instead."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `src/orchestrator.ts:184`

```
// AI REMEDIATION MANIFEST
Target_File: src/orchestrator.ts
Target_Line: 184
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `src/orchestrator.ts:202`

```
// AI REMEDIATION MANIFEST
Target_File: src/orchestrator.ts
Target_Line: 202
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

CRITICAL**rules.dat-no-process-exit**

Semgrep

Description: Avoid using `process.exit()` in application code. It abruptly terminates the Node.js process. Throw an error instead.

Location: `src/orchestrator.ts:210`

```
// AI REMEDIATION MANIFEST
Target_File: src/orchestrator.ts
Target_Line: 210
Issue_Type: rules.dat-no-process-exit
Severity: CRITICAL
Category: n/a
```

Instruction: Fix the issue described below.
"Avoid using `process.exit()` in application code. It abruptly terminates the Node.js process. Throw an error instead."

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `src/orchestrator.ts:229`

```
// AI REMEDIATION MANIFEST
Target_File: src/orchestrator.ts
Target_Line: 229
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a
```

Instruction: Fix the issue described below.
"Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino."

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `src/orchestrator.ts:262`

```
// AI REMEDIATION MANIFEST
Target_File: src/orchestrator.ts
Target_Line: 262
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `src/orchestrator.ts:305`

```
// AI REMEDIATION MANIFEST
Target_File: src/orchestrator.ts
Target_Line: 305
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```


HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `src/orchestrator.ts:314`

```
// AI REMEDIATION MANIFEST
Target_File: src/orchestrator.ts
Target_Line: 314
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `src/orchestrator.ts:316`

```
// AI REMEDIATION MANIFEST
Target_File: src/orchestrator.ts
Target_Line: 316
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `src/orchestrator.ts:318`

```
// AI REMEDIATION MANIFEST
Target_File: src/orchestrator.ts
Target_Line: 318
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `src/orchestrator.ts:323`

```
// AI REMEDIATION MANIFEST
Target_File: src/orchestrator.ts
Target_Line: 323
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `src/orchestrator.ts:328`

```
// AI REMEDIATION MANIFEST
Target_File: src/orchestrator.ts
Target_Line: 328
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `src/orchestrator.ts:343`

```
// AI REMEDIATION MANIFEST
Target_File: src/orchestrator.ts
Target_Line: 343
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `src/orchestrator.ts:347`

```
// AI REMEDIATION MANIFEST
Target_File: src/orchestrator.ts
Target_Line: 347
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `src/orchestrator.ts:349`

```
// AI REMEDIATION MANIFEST
Target_File: src/orchestrator.ts
Target_Line: 349
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `src/orchestrator.ts:353`

```
// AI REMEDIATION MANIFEST
Target_File: src/orchestrator.ts
Target_Line: 353
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `src/orchestrator.ts:369`

```
// AI REMEDIATION MANIFEST
Target_File: src/orchestrator.ts
Target_Line: 369
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `src/orchestrator.ts:385`

```
// AI REMEDIATION MANIFEST
Target_File: src/orchestrator.ts
Target_Line: 385
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `src/orchestrator.ts:395`

```
// AI REMEDIATION MANIFEST
Target_File: src/orchestrator.ts
Target_Line: 395
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `src/orchestrator.ts:404`

```
// AI REMEDIATION MANIFEST
Target_File: src/orchestrator.ts
Target_Line: 404
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `src/orchestrator.ts:406`

```
// AI REMEDIATION MANIFEST
Target_File: src/orchestrator.ts
Target_Line: 406
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `src/orchestrator.ts:411`

```
// AI REMEDIATION MANIFEST
Target_File: src/orchestrator.ts
Target_Line: 411
Issue_Type: rules.dat-no-console-log
Severity:    HIGH
Category:    n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `src/orchestrator.ts:413`

```
// AI REMEDIATION MANIFEST
Target_File: src/orchestrator.ts
Target_Line: 413
Issue_Type: rules.dat-no-console-log
Severity:    HIGH
Category:    n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```


HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `src/orchestrator.ts:416`

```
// AI REMEDIATION MANIFEST
Target_File: src/orchestrator.ts
Target_Line: 416
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `src/orchestrator.ts:431`

```
// AI REMEDIATION MANIFEST
Target_File: src/orchestrator.ts
Target_Line: 431
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `src/orchestrator.ts:444`

```
// AI REMEDIATION MANIFEST
Target_File: src/orchestrator.ts
Target_Line: 444
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `src/orchestrator.ts:452`

```
// AI REMEDIATION MANIFEST
Target_File: src/orchestrator.ts
Target_Line: 452
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `src/orchestrator.ts:483`

```
// AI REMEDIATION MANIFEST
Target_File: src/orchestrator.ts
Target_Line: 483
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `src/orchestrator.ts:488`

```
// AI REMEDIATION MANIFEST
Target_File: src/orchestrator.ts
Target_Line: 488
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `src/orchestrator.ts:489`

```
// AI REMEDIATION MANIFEST
Target_File: src/orchestrator.ts
Target_Line: 489
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `src/orchestrator.ts:490`

```
// AI REMEDIATION MANIFEST
Target_File: src/orchestrator.ts
Target_Line: 490
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `src/orchestrator.ts:492`

```
// AI REMEDIATION MANIFEST
Target_File: src/orchestrator.ts
Target_Line: 492
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `src/orchestrator.ts:501`

```
// AI REMEDIATION MANIFEST
Target_File: src/orchestrator.ts
Target_Line: 501
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `src/orchestrator.ts:506`

```
// AI REMEDIATION MANIFEST
Target_File: src/orchestrator.ts
Target_Line: 506
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `src/orchestrator.ts:511`

```
// AI REMEDIATION MANIFEST
Target_File: src/orchestrator.ts
Target_Line: 511
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `src/orchestrator.ts:515`

```
// AI REMEDIATION MANIFEST
Target_File: src/orchestrator.ts
Target_Line: 515
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `src/orchestrator.ts:517`

```
// AI REMEDIATION MANIFEST
Target_File: src/orchestrator.ts
Target_Line: 517
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `src/orchestrator.ts:527`

```
// AI REMEDIATION MANIFEST
Target_File: src/orchestrator.ts
Target_Line: 527
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `src/orchestrator.ts:529`

```
// AI REMEDIATION MANIFEST
Target_File: src/orchestrator.ts
Target_Line: 529
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```


HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `src/orchestrator.ts:531`

```
// AI REMEDIATION MANIFEST
Target_File: src/orchestrator.ts
Target_Line: 531
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `src/orchestrator.ts:544`

```
// AI REMEDIATION MANIFEST
Target_File: src/orchestrator.ts
Target_Line: 544
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `src/orchestrator.ts:546`

```
// AI REMEDIATION MANIFEST
Target_File: src/orchestrator.ts
Target_Line: 546
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `src/orchestrator.ts:548`

```
// AI REMEDIATION MANIFEST
Target_File: src/orchestrator.ts
Target_Line: 548
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `src/orchestrator.ts:564`

```
// AI REMEDIATION MANIFEST
Target_File: src/orchestrator.ts
Target_Line: 564
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `src/orchestrator.ts:566`

```
// AI REMEDIATION MANIFEST
Target_File: src/orchestrator.ts
Target_Line: 566
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `src/orchestrator.ts:573`

```
// AI REMEDIATION MANIFEST
Target_File: src/orchestrator.ts
Target_Line: 573
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `src/orchestrator.ts:587`

```
// AI REMEDIATION MANIFEST
Target_File: src/orchestrator.ts
Target_Line: 587
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `src/orchestrator.ts:603`

```
// AI REMEDIATION MANIFEST
Target_File: src/orchestrator.ts
Target_Line: 603
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `src/readiness.ts:122`

```
// AI REMEDIATION MANIFEST
Target_File: src/readiness.ts
Target_Line: 122
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `src/readiness.ts:149`

```
// AI REMEDIATION MANIFEST
Target_File: src/readiness.ts
Target_Line: 149
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `src/readiness.ts:151`

```
// AI REMEDIATION MANIFEST
Target_File: src/readiness.ts
Target_Line: 151
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `src/readiness.ts:152`

```
// AI REMEDIATION MANIFEST
Target_File: src/readiness.ts
Target_Line: 152
Issue_Type: rules.dat-no-console-log
Severity:    HIGH
Category:    n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `src/readiness.ts:159`

```
// AI REMEDIATION MANIFEST
Target_File: src/readiness.ts
Target_Line: 159
Issue_Type: rules.dat-no-console-log
Severity:    HIGH
Category:    n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `src/readiness.ts:160`

```
// AI REMEDIATION MANIFEST
Target_File: src/readiness.ts
Target_Line: 160
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `src/readiness.ts:175`

```
// AI REMEDIATION MANIFEST
Target_File: src/readiness.ts
Target_Line: 175
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```


HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `src/readiness.ts:176`

```
// AI REMEDIATION MANIFEST
Target_File: src/readiness.ts
Target_Line: 176
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `src/readiness.ts:177`

```
// AI REMEDIATION MANIFEST
Target_File: src/readiness.ts
Target_Line: 177
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `src/readiness.ts:181`

```
// AI REMEDIATION MANIFEST
Target_File: src/readiness.ts
Target_Line: 181
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `src/readiness.ts:182`

```
// AI REMEDIATION MANIFEST
Target_File: src/readiness.ts
Target_Line: 182
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `src/reporter.ts:14`

```
// AI REMEDIATION MANIFEST
Target_File: src/reporter.ts
Target_Line: 14
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `src/reporter.ts:15`

```
// AI REMEDIATION MANIFEST
Target_File: src/reporter.ts
Target_Line: 15
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `src/reporter.ts:24`

```
// AI REMEDIATION MANIFEST
Target_File: src/reporter.ts
Target_Line: 24
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `src/reporter.ts:25`

```
// AI REMEDIATION MANIFEST
Target_File: src/reporter.ts
Target_Line: 25
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `src/reporter.ts:28`

```
// AI REMEDIATION MANIFEST
Target_File: src/reporter.ts
Target_Line: 28
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `src/reporter.ts:30`

```
// AI REMEDIATION MANIFEST
Target_File: src/reporter.ts
Target_Line: 30
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `src/reporter.ts:34`

```
// AI REMEDIATION MANIFEST
Target_File: src/reporter.ts
Target_Line: 34
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `src/reporter.ts:40`

```
// AI REMEDIATION MANIFEST
Target_File: src/reporter.ts
Target_Line: 40
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `src/reporter.ts:42`

```
// AI REMEDIATION MANIFEST
Target_File: src/reporter.ts
Target_Line: 42
Issue_Type: rules.dat-no-console-log
Severity:    HIGH
Category:    n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `src/reporter.ts:48`

```
// AI REMEDIATION MANIFEST
Target_File: src/reporter.ts
Target_Line: 48
Issue_Type: rules.dat-no-console-log
Severity:    HIGH
Category:    n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `src/reporter.ts:49`

```
// AI REMEDIATION MANIFEST
Target_File: src/reporter.ts
Target_Line: 49
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `src/reporter.ts:50`

```
// AI REMEDIATION MANIFEST
Target_File: src/reporter.ts
Target_Line: 50
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```


HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `src/reporter.ts:51`

```
// AI REMEDIATION MANIFEST
Target_File: src/reporter.ts
Target_Line: 51
Issue_Type: rules.dat-no-console-log
Severity:    HIGH
Category:    n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `src/reporter.ts:52`

```
// AI REMEDIATION MANIFEST
Target_File: src/reporter.ts
Target_Line: 52
Issue_Type: rules.dat-no-console-log
Severity:    HIGH
Category:    n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `src/reporter.ts:53`

```
// AI REMEDIATION MANIFEST
Target_File: src/reporter.ts
Target_Line: 53
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `src/reporter.ts:54`

```
// AI REMEDIATION MANIFEST
Target_File: src/reporter.ts
Target_Line: 54
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `src/reporter.ts:56`

```
// AI REMEDIATION MANIFEST
Target_File: src/reporter.ts
Target_Line: 56
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `src/reporter.ts:60`

```
// AI REMEDIATION MANIFEST
Target_File: src/reporter.ts
Target_Line: 60
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `src/reporter.ts:62`

```
// AI REMEDIATION MANIFEST
Target_File: src/reporter.ts
Target_Line: 62
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `src/reporter.ts:65`

```
// AI REMEDIATION MANIFEST
Target_File: src/reporter.ts
Target_Line: 65
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `src/reporter.ts:69`

```
// AI REMEDIATION MANIFEST
Target_File: src/reporter.ts
Target_Line: 69
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `src/reporter.ts:70`

```
// AI REMEDIATION MANIFEST
Target_File: src/reporter.ts
Target_Line: 70
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `src/reporter.ts:71`

```
// AI REMEDIATION MANIFEST
Target_File: src/reporter.ts
Target_Line: 71
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `src/reporter.ts:73`

```
// AI REMEDIATION MANIFEST
Target_File: src/reporter.ts
Target_Line: 73
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `src/reporter.ts:76`

```
// AI REMEDIATION MANIFEST
Target_File: src/reporter.ts
Target_Line: 76
Issue_Type: rules.dat-no-console-log
Severity:    HIGH
Category:    n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

CRITICAL**javascript.lang.security.detect-child-process.detect-child-process**

Semgrep

Description: Detected calls to `child_process` from a function argument ``command``. This could lead to a command injection if the input is user controllable. Try to avoid calls to `child_process`, and if it is needed ensure user input is correctly sanitized or sandboxed.

Location: `src/runner.ts:18`

```
// AI REMEDIATION MANIFEST
Target_File: src/runner.ts
Target_Line: 18
Issue_Type: javascript.lang.security.detect-child-process.detect-child-process
Severity:    CRITICAL
Category:    n/a

Instruction: Fix the issue described below.
"Detected calls to child_process from a function argument `command`.
This could lead to a command injection if the input is user
controllable. Try to avoid calls to child_process, and if it is needed
ensure user input is correctly sanitized or sandboxed. "
```

Description: Unresolved TODO, FIXME, or HACK comment found. Ensure this technical debt is tracked in Jira.

Location: testing_data/custom-rules-test.js:2

```
// AI REMEDIATION MANIFEST
Target_File: testing_data/custom-rules-test.js
Target_Line: 2
Issue_Type: rules.dat-no-todo-fixme
Severity: INFO
Category: n/a

Instruction: Fix the issue described below.
"Unresolved TODO, FIXME, or HACK comment found. Ensure this technical
debt is tracked in Jira."
```

Description: Avoid using console.log() in production code. Use a structured logging library like Winston or Pino.

Location: testing_data/custom-rules-test.js:3

```
// AI REMEDIATION MANIFEST
Target_File: testing_data/custom-rules-test.js
Target_Line: 3
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```


HIGH**rules.dat-no-console-log**

Semgrep

Description: Avoid using `console.log()` in production code. Use a structured logging library like Winston or Pino.

Location: `testing_data/custom-rules-test.js:6`

```
// AI REMEDIATION MANIFEST
Target_File: testing_data/custom-rules-test.js
Target_Line: 6
Issue_Type: rules.dat-no-console-log
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Avoid using console.log() in production code. Use a structured logging
library like Winston or Pino."
```

CRITICAL**rules.dat-no-process-exit**

Semgrep

Description: Avoid using `process.exit()` in application code. It abruptly terminates the Node.js process. Throw an error instead.

Location: `testing_data/custom-rules-test.js:7`

```
// AI REMEDIATION MANIFEST
Target_File: testing_data/custom-rules-test.js
Target_Line: 7
Issue_Type: rules.dat-no-process-exit
Severity: CRITICAL
Category: n/a

Instruction: Fix the issue described below.
"Avoid using process.exit() in application code. It abruptly terminates
the Node.js process. Throw an error instead."
```

HIGH**javascript.express.security.audit.xss.direct-response-write.direct-response-write**

Semgrep

Description: Detected directly writing to a Response object from user-defined input. This bypasses any HTML escaping and may expose your application to a Cross-Site-scripting (XSS) vulnerability. Instead, use 'resp.render()' to render safely escaped HTML.

Location: testing_data/index.js:9

```
// AI REMEDIATION MANIFEST
Target_File: testing_data/index.js
Target_Line: 9
Issue_Type: javascript.express.security.audit.xss.direct-response-
write.direct-response-write
Severity:    HIGH
Category:    n/a

Instruction: Fix the issue described below.
"Detected directly writing to a Response object from user-defined input.
This bypasses any HTML escaping and may expose your application to a
Cross-Site-scripting (XSS) vulnerability. Instead, use 'resp.render()'
to render safely escaped HTML."
```

CRITICAL**javascript.lang.security.audit.code-string-concat.code-string-concat**

Semgrep

Description: Found data from an Express or Next web request flowing to `eval`. If this data is user-controllable this can lead to execution of arbitrary system commands in the context of your application process. Avoid `eval` whenever possible.

Location: testing_data/index.js:15

```
// AI REMEDIATION MANIFEST
Target_File: testing_data/index.js
Target_Line: 15
Issue_Type: javascript.lang.security.audit.code-string-concat.code-
string-concat
Severity:    CRITICAL
Category:    n/a

Instruction: Fix the issue described below.
"Found data from an Express or Next web request flowing to `eval`. If
this data is user-controllable this can lead to execution of arbitrary
system commands in the context of your application process. Avoid `eval`
whenever possible."
```

HIGH**javascript.express.security.audit.xss.direct-response-write.direct-response-write**

Semgrep

Description: Detected directly writing to a Response object from user-defined input. This bypasses any HTML escaping and may expose your application to a Cross-Site-scripting (XSS) vulnerability. Instead, use 'resp.render()' to render safely escaped HTML.

Location: testing_data/index.js:16

```
// AI REMEDIATION MANIFEST
Target_File: testing_data/index.js
Target_Line: 16
Issue_Type: javascript.express.security.audit.xss.direct-response-
write.direct-response-write
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Detected directly writing to a Response object from user-defined input.
This bypasses any HTML escaping and may expose your application to a
Cross-Site-scripting (XSS) vulnerability. Instead, use 'resp.render()'
to render safely escaped HTML."
```

Jest Coverage Findings

HIGH**LOW-TEST-COVERAGE**

Jest

Description: Overall line coverage (33.33%) is below the required threshold (80%).

```
// AI REMEDIATION MANIFEST
Target_File: Global/Dependency
Target_Line: N/A
Issue_Type: LOW-TEST-COVERAGE
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Overall line coverage (33.33%) is below the required threshold (80%)."
```

MEDIUM**FILE-LOW-COVERAGE**

Jest

Description: File coverage (33.33%) is below threshold.

Location: testing_data/app/math.js

```
// AI REMEDIATION MANIFEST
Target_File: testing_data/app/math.js
Target_Line: N/A
Issue_Type: FILE-LOW-COVERAGE
Severity: MEDIUM
Category: n/a

Instruction: Fix the issue described below.
"File coverage (33.33%) is below threshold."
```

Checkov Findings

HIGH**CKV_AWS_260**

Checkov (terraform)

Description: Ensure no security groups allow ingress from 0.0.0.0:0 to port 80

Location: /testing_data/main.tf:23

```
// AI REMEDIATION MANIFEST
Target_File: /testing_data/main.tf
Target_Line: 23
Issue_Type: CKV_AWS_260
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Ensure no security groups allow ingress from 0.0.0.0:0 to port 80"
```

HIGH**CKV_AWS_24**

Checkov (terraform)

Description: Ensure no security groups allow ingress from 0.0.0.0:0 to port 22

Location: /testing_data/main.tf:23

```
// AI REMEDIATION MANIFEST
Target_File: /testing_data/main.tf
Target_Line: 23
Issue_Type: CKV_AWS_24
Severity: HIGH
Category: n/a
```

Instruction: Fix the issue described below.

"Ensure no security groups allow ingress from 0.0.0.0:0 to port 22"

HIGH**CKV_AWS_23**

Checkov (terraform)

Description: Ensure every security group and rule has a description

Location: /testing_data/main.tf:23

```
// AI REMEDIATION MANIFEST
Target_File: /testing_data/main.tf
Target_Line: 23
Issue_Type: CKV_AWS_23
Severity: HIGH
Category: n/a
```

Instruction: Fix the issue described below.

"Ensure every security group and rule has a description"

HIGH**CKV_AWS_277**

Checkov (terraform)

Description: Ensure no security groups allow ingress from 0.0.0.0:0 to port -1

Location: /testing_data/main.tf:23

```
// AI REMEDIATION MANIFEST
Target_File: /testing_data/main.tf
Target_Line: 23
Issue_Type: CKV_AWS_277
Severity: HIGH
Category: n/a
```

Instruction: Fix the issue described below.

"Ensure no security groups allow ingress from 0.0.0.0:0 to port -1"

HIGH**CKV_AWS_25**

Checkov (terraform)

Description: Ensure no security groups allow ingress from 0.0.0.0:0 to port 3389

Location: /testing_data/main.tf:23

```
// AI REMEDIATION MANIFEST
Target_File: /testing_data/main.tf
Target_Line: 23
Issue_Type: CKV_AWS_25
Severity: HIGH
Category: n/a
```

Instruction: Fix the issue described below.

"Ensure no security groups allow ingress from 0.0.0.0:0 to port 3389"

HIGH**CKV_AWS_41**

Checkov (terraform)

Description: Ensure no hard coded AWS access key and secret key exists in provider

Location: /testing_data/main.tf:15

```
// AI REMEDIATION MANIFEST
Target_File: /testing_data/main.tf
Target_Line: 15
Issue_Type: CKV_AWS_41
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Ensure no hard coded AWS access key and secret key exists in provider"
```

HIGH**CKV_DOCKER_7**

Checkov (dockerfile)

Description: Ensure the base image uses a non latest version tag

Location: /testing_data/Dockerfile:1

```
// AI REMEDIATION MANIFEST
Target_File: /testing_data/Dockerfile
Target_Line: 1
Issue_Type: CKV_DOCKER_7
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Ensure the base image uses a non latest version tag"
```

HIGH**CKV_DOCKER_2**

Checkov (dockerfile)

Description: Ensure that HEALTHCHECK instructions have been added to container images

Location: /testing_data/Dockerfile:1

```
// AI REMEDIATION MANIFEST
Target_File: /testing_data/Dockerfile
Target_Line: 1
Issue_Type: CKV_DOCKER_2
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Ensure that HEALTHCHECK instructions have been added to container
images"
```

HIGH**CKV_DOCKER_3**

Checkov (dockerfile)

Description: Ensure that a user for the container has been created

Location: /testing_data/Dockerfile:1

```
// AI REMEDIATION MANIFEST
Target_File: /testing_data/Dockerfile
Target_Line: 1
Issue_Type: CKV_DOCKER_3
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Ensure that a user for the container has been created"
```


HIGH**CKV_DOCKER_2**

Checkov (dockerfile)

Description: Ensure that HEALTHCHECK instructions have been added to container images

Location: /Dockerfile:1

```
// AI REMEDIATION MANIFEST
Target_File: /Dockerfile
Target_Line: 1
Issue_Type: CKV_DOCKER_2
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Ensure that HEALTHCHECK instructions have been added to container
images"
```

HIGH**CKV_DOCKER_3**

Checkov (dockerfile)

Description: Ensure that a user for the container has been created

Location: /Dockerfile:1

```
// AI REMEDIATION MANIFEST
Target_File: /Dockerfile
Target_Line: 1
Issue_Type: CKV_DOCKER_3
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Ensure that a user for the container has been created"
```

HIGH**CKV_SECRET_6**

Checkov (secrets)

Description: Base64 High Entropy String**Location:** /testing_data/Dockerfile:8

```
// AI REMEDIATION MANIFEST
Target_File: /testing_data/Dockerfile
Target_Line: 8
Issue_Type: CKV_SECRET_6
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"Base64 High Entropy String"
```

HIGH**CKV_SECRET_2**

Checkov (secrets)

Description: AWS Access Key**Location:** /testing_data/main.tf:18

```
// AI REMEDIATION MANIFEST
Target_File: /testing_data/main.tf
Target_Line: 18
Issue_Type: CKV_SECRET_2
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"AWS Access Key"
```

Logic Tests Findings

Description: All 1 logical test(s) passed.

```
// AI REMEDIATION MANIFEST
Target_File: Global/Dependency
Target_Line: N/A
Issue_Type: LOGIC-TESTS-PASSED
Severity: INFO
Category: n/a

Instruction: Fix the issue described below.
"All 1 logical test(s) passed."
```

k6 Load Test Findings

Description: p95 Latency (60.72ms) is within acceptable limits.

```
// AI REMEDIATION MANIFEST
Target_File: Global/Dependency
Target_Line: N/A
Issue_Type: LATENCY-OK
Severity: INFO
Category: n/a

Instruction: Fix the issue described below.
"p95 Latency (60.72ms) is within acceptable limits."
```

HIGH**HTTP-CHECKS-FAILED**

k6

Description: 40.00% of HTTP requests failed the status==200 check.

```
// AI REMEDIATION MANIFEST
Target_File: Global/Dependency
Target_Line: N/A
Issue_Type: HTTP-CHECKS-FAILED
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"40.00% of HTTP requests failed the status==200 check."
```

Trivy (FS) Findings

HIGH**CVE-2023-30533**

Trivy

Description: xlsx (0.18.5) is vulnerable.

Location: package-lock.json

```
// AI REMEDIATION MANIFEST
Target_File: package-lock.json
Target_Line: N/A
Issue_Type: CVE-2023-30533
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"xlsx (0.18.5) is vulnerable."

Suggested_Remedy: Update to 0.19.3
```

HIGH**CVE-2024-22363**

Trivy

Description: xlsx (0.18.5) is vulnerable.**Location:** package-lock.json

```
// AI REMEDIATION MANIFEST
Target_File: package-lock.json
Target_Line: N/A
Issue_Type: CVE-2024-22363
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"xlsx (0.18.5) is vulnerable."

Suggested_Remedy: Update to 0.20.2
```

INFO**CVE-2024-45590**

Trivy

Description: [UNREACHABLE] body-parser (1.18.2) is vulnerable.**Location:** testing_data/package-lock.json

```
// AI REMEDIATION MANIFEST
Target_File: testing_data/package-lock.json
Target_Line: N/A
Issue_Type: CVE-2024-45590
Severity: INFO
Category: n/a

Instruction: Fix the issue described below.
"[UNREACHABLE] body-parser (1.18.2) is vulnerable."

Suggested_Remedy: Update to 1.20.3
```

Description: [UNREACHABLE] cookie (0.3.1) is vulnerable.

Location: testing_data/package-lock.json

```
// AI REMEDIATION MANIFEST
Target_File: testing_data/package-lock.json
Target_Line: N/A
Issue_Type: CVE-2024-47764
Severity: INFO
Category: n/a

Instruction: Fix the issue described below.
"[UNREACHABLE] cookie (0.3.1) is vulnerable."

Suggested_Remedy: Update to 0.7.0
```

Description: express (4.16.0) is vulnerable.

Location: testing_data/package-lock.json

```
// AI REMEDIATION MANIFEST
Target_File: testing_data/package-lock.json
Target_Line: N/A
Issue_Type: CVE-2024-29041
Severity: MEDIUM
Category: n/a

Instruction: Fix the issue described below.
"express (4.16.0) is vulnerable."

Suggested_Remedy: Update to 4.19.2, 5.0.0-beta.3
```

LOW**CVE-2024-43796**

Trivy

Description: express (4.16.0) is vulnerable.

Location: testing_data/package-lock.json

```
// AI REMEDIATION MANIFEST
Target_File: testing_data/package-lock.json
Target_Line: N/A
Issue_Type: CVE-2024-43796
Severity: LOW
Category: n/a

Instruction: Fix the issue described below.
"express (4.16.0) is vulnerable."

Suggested_Remedey: Update to 4.20.0, 5.0.0
```

HIGH**CVE-2020-8203**

Trivy

Description: lodash (4.17.15) is vulnerable.

Location: testing_data/package-lock.json

```
// AI REMEDIATION MANIFEST
Target_File: testing_data/package-lock.json
Target_Line: N/A
Issue_Type: CVE-2020-8203
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"lodash (4.17.15) is vulnerable."

Suggested_Remedey: Update to 4.17.19
```

HIGH**CVE-2021-23337**

Trivy

Description: lodash (4.17.15) is vulnerable.**Location:** testing_data/package-lock.json

```
// AI REMEDIATION MANIFEST
Target_File: testing_data/package-lock.json
Target_Line: N/A
Issue_Type: CVE-2021-23337
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"lodash (4.17.15) is vulnerable."

Suggested_Remedy: Update to 4.17.21
```

HIGH**CVE-2026-4800**

Trivy

Description: lodash (4.17.15) is vulnerable.**Location:** testing_data/package-lock.json

```
// AI REMEDIATION MANIFEST
Target_File: testing_data/package-lock.json
Target_Line: N/A
Issue_Type: CVE-2026-4800
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"lodash (4.17.15) is vulnerable."

Suggested_Remedy: Update to 4.18.0
```


HIGH**NSWG-ECO-516**

Trivy

Description: lodash (4.17.15) is vulnerable.**Location:** testing_data/package-lock.json

```
// AI REMEDIATION MANIFEST
Target_File: testing_data/package-lock.json
Target_Line: N/A
Issue_Type: NSWG-ECO-516
Severity: HIGH
Category: n/a

Instruction: Fix the issue described below.
"lodash (4.17.15) is vulnerable."

Suggested_Remedey: Update to >=4.17.19
```

MEDIUM**CVE-2020-28500**

Trivy

Description: lodash (4.17.15) is vulnerable.**Location:** testing_data/package-lock.json

```
// AI REMEDIATION MANIFEST
Target_File: testing_data/package-lock.json
Target_Line: N/A
Issue_Type: CVE-2020-28500
Severity: MEDIUM
Category: n/a

Instruction: Fix the issue described below.
"lodash (4.17.15) is vulnerable."

Suggested_Remedey: Update to 4.17.21
```

MEDIUM**CVE-2025-13465**

Trivy

Description: lodash (4.17.15) is vulnerable.**Location:** testing_data/package-lock.json

```
// AI REMEDIATION MANIFEST
Target_File: testing_data/package-lock.json
Target_Line: N/A
Issue_Type: CVE-2025-13465
Severity: MEDIUM
Category: n/a

Instruction: Fix the issue described below.
"lodash (4.17.15) is vulnerable."

Suggested_Remedy: Update to 4.17.23
```

MEDIUM**CVE-2026-2950**

Trivy

Description: lodash (4.17.15) is vulnerable.**Location:** testing_data/package-lock.json

```
// AI REMEDIATION MANIFEST
Target_File: testing_data/package-lock.json
Target_Line: N/A
Issue_Type: CVE-2026-2950
Severity: MEDIUM
Category: n/a

Instruction: Fix the issue described below.
"lodash (4.17.15) is vulnerable."

Suggested_Remedy: Update to 4.18.0
```

Description: [UNREACHABLE] path-to-regexp (0.1.7) is vulnerable.

Location: testing_data/package-lock.json

```
// AI REMEDIATION MANIFEST
Target_File: testing_data/package-lock.json
Target_Line: N/A
Issue_Type: CVE-2024-45296
Severity: INFO
Category: n/a

Instruction: Fix the issue described below.
"[UNREACHABLE] path-to-regexp (0.1.7) is vulnerable."

Suggested_Remedry: Update to 1.9.0, 0.1.10, 8.0.0, 3.3.0, 6.3.0
```

Description: [UNREACHABLE] path-to-regexp (0.1.7) is vulnerable.

Location: testing_data/package-lock.json

```
// AI REMEDIATION MANIFEST
Target_File: testing_data/package-lock.json
Target_Line: N/A
Issue_Type: CVE-2024-52798
Severity: INFO
Category: n/a

Instruction: Fix the issue described below.
"[UNREACHABLE] path-to-regexp (0.1.7) is vulnerable."

Suggested_Remedry: Update to 0.1.12
```

Description: [UNREACHABLE] path-to-regexp (0.1.7) is vulnerable.

Location: testing_data/package-lock.json

```
// AI REMEDIATION MANIFEST
Target_File: testing_data/package-lock.json
Target_Line: N/A
Issue_Type: CVE-2026-4867
Severity: INFO
Category: n/a

Instruction: Fix the issue described below.
"[UNREACHABLE] path-to-regexp (0.1.7) is vulnerable."

Suggested_Remedy: Update to 0.1.13
```

Description: [UNREACHABLE] qs (6.5.1) is vulnerable.

Location: testing_data/package-lock.json

```
// AI REMEDIATION MANIFEST
Target_File: testing_data/package-lock.json
Target_Line: N/A
Issue_Type: CVE-2022-24999
Severity: INFO
Category: n/a

Instruction: Fix the issue described below.
"[UNREACHABLE] qs (6.5.1) is vulnerable."

Suggested_Remedy: Update to 6.10.3, 6.9.7, 6.8.3, 6.7.3, 6.6.1, 6.5.3,
6.4.1, 6.3.3, 6.2.4
```

Description: [UNREACHABLE] qs (6.5.1) is vulnerable.

Location: testing_data/package-lock.json

```
// AI REMEDIATION MANIFEST
Target_File: testing_data/package-lock.json
Target_Line: N/A
Issue_Type: CVE-2025-15284
Severity: INFO
Category: n/a

Instruction: Fix the issue described below.
"[UNREACHABLE] qs (6.5.1) is vulnerable."

Suggested_Remedy: Update to 6.14.1
```

Description: [UNREACHABLE] send (0.16.0) is vulnerable.

Location: testing_data/package-lock.json

```
// AI REMEDIATION MANIFEST
Target_File: testing_data/package-lock.json
Target_Line: N/A
Issue_Type: CVE-2024-43799
Severity: INFO
Category: n/a

Instruction: Fix the issue described below.
"[UNREACHABLE] send (0.16.0) is vulnerable."

Suggested_Remedy: Update to 0.19.0
```

Description: [UNREACHABLE] serve-static (1.13.0) is vulnerable.

Location: testing_data/package-lock.json

```
// AI REMEDIATION MANIFEST
Target_File: testing_data/package-lock.json
Target_Line: N/A
Issue_Type: CVE-2024-43800
Severity: INFO
Category: n/a

Instruction: Fix the issue described below.
"[UNREACHABLE] serve-static (1.13.0) is vulnerable."

Suggested_Remedies: Update to 1.16.0, 2.1.0
```

OWASP ZAP Findings

Description: Content Security Policy (CSP) Header Not Set: Content Security Policy (CSP) is an added layer of security that helps to detect and mitigate certai...

Location: https://example.com

```
// AI REMEDIATION MANIFEST
Target_File: https://example.com
Target_Line: N/A
Issue_Type: 10038
Severity: MEDIUM
Category: n/a

Instruction: Fix the issue described below.
"Content Security Policy (CSP) Header Not Set: Content Security Policy (CSP) is an added layer of security that helps to detect and mitigate certai..."

Suggested_Remedies: Ensure that your web server, application server, load balancer, etc. is configured to set the Content-Security-Policy header.
```

Description: Missing Anti-clickjacking Header: The response does not protect against 'ClickJacking' attacks. It should include either Content-Secur...

Location: `https://example.com`

```
// AI REMEDIATION MANIFEST
Target_File: https://example.com
Target_Line: N/A
Issue_Type: 10020
Severity: MEDIUM
Category: n/a
```

Instruction: Fix the issue described below.

"Missing Anti-clickjacking Header: The response does not protect against 'ClickJacking' attacks. It should include either Content-Secur..."

Suggested Remedy: Modern Web browsers support the Content-Security-Policy and X-Frame-Options HTTP headers. Ensure one of them is set on all web pages returned by your

Description: Cross-Origin-Embedder-Policy Header Missing or Invalid: Cross-Origin-Embedder-Policy header is a response header that prevents a document from loading any c...

Location: `https://example.com`

```
// AI REMEDIATION MANIFEST
Target_File: https://example.com
Target_Line: N/A
Issue_Type: 90004
Severity: LOW
Category: n/a
```

Instruction: Fix the issue described below.

"Cross-Origin-Embedder-Policy Header Missing or Invalid: Cross-Origin-Embedder-Policy header is a response header that prevents a document from loading any c..."

Suggested Remedy: Ensure that the application/web server sets the Cross-Origin-Embedder-Policy header appropriately, and that it sets the Cross-Origin-Embedder-Policy h

Description: HTTPS Content Available via HTTP: Content which was initially accessed via HTTPS (i.e.: using SSL/TLS encryption) is also accessible v...

Location: `https://example.com`

```
// AI REMEDIATION MANIFEST
Target_File: https://example.com
Target_Line: N/A
Issue_Type: 10047
Severity: LOW
Category: n/a
```

Instruction: Fix the issue described below.

"HTTPS Content Available via HTTP: Content which was initially accessed via HTTPS (i.e.: using SSL/TLS encryption) is also accessible v..."

Suggested_Remedies: Ensure that your web server, application server, load balancer, etc. is configured to only serve such content via HTTPS. Consider implementing HTTP St

Description: Permissions Policy Header Not Set: Permissions Policy Header is an added layer of security that helps to restrict from unauthorized acc...

Location: `https://example.com`

```
// AI REMEDIATION MANIFEST
Target_File: https://example.com
Target_Line: N/A
Issue_Type: 10063
Severity: LOW
Category: n/a
```

Instruction: Fix the issue described below.

"Permissions Policy Header Not Set: Permissions Policy Header is an added layer of security that helps to restrict from unauthorized acc..."

Suggested_Remedies: Ensure that your web server, application server, load balancer, etc. is configured to set the Permissions-Policy header.

Description: Strict-Transport-Security Header Not Set: HTTP Strict Transport Security (HSTS) is a web security policy mechanism whereby a web server declar...

Location: `https://example.com`

```
// AI REMEDIATION MANIFEST
Target_File: https://example.com
Target_Line: N/A
Issue_Type: 10035
Severity: LOW
Category: n/a
```

Instruction: Fix the issue described below.

"Strict-Transport-Security Header Not Set: HTTP Strict Transport Security (HSTS) is a web security policy mechanism whereby a web server declar..."

Suggested_Remedies: Ensure that your web server, application server, load balancer, etc. is configured to enforce Strict-Transport-Security.

Description: X-Content-Type-Options Header Missing: The Anti-MIME-Sniffing header X-Content-Type-Options was not set to 'nosniff'. This allows older ver...

Location: `https://example.com`

```
// AI REMEDIATION MANIFEST
Target_File: https://example.com
Target_Line: N/A
Issue_Type: 10021
Severity: LOW
Category: n/a
```

Instruction: Fix the issue described below.

"X-Content-Type-Options Header Missing: The Anti-MIME-Sniffing header X-Content-Type-Options was not set to 'nosniff'. This allows older ver..."

Suggested_Remedies: Ensure that the application/web server sets the Content-Type header appropriately, and that it sets the X-Content-Type-Options header to 'nosniff' for

Description: Re-examine Cache-control Directives: The cache-control header has not been set properly or is missing, allowing the browser and proxies t...

Location: `https://example.com`

```
// AI REMEDIATION MANIFEST
Target_File: https://example.com
Target_Line: N/A
Issue_Type: 10015
Severity: LOW
Category: n/a
```

Instruction: Fix the issue described below.

"Re-examine Cache-control Directives: The cache-control header has not been set properly or is missing, allowing the browser and proxies t..."

Suggested_Remedies: For secure content, ensure the cache-control HTTP header is set with "no-cache, no-store, must-revalidate". If an asset should be cached consider sett

Description: Retrieved from Cache: The content was retrieved from a shared cache. If the response data is sensitive, personal or user-s...

Location: `https://example.com`

```
// AI REMEDIATION MANIFEST
Target_File: https://example.com
Target_Line: N/A
Issue_Type: 10050
Severity: LOW
Category: n/a
```

Instruction: Fix the issue described below.

"Retrieved from Cache: The content was retrieved from a shared cache. If the response data is sensitive, personal or user-s..."

Suggested_Remedies: Validate that the response does not contain sensitive, personal or user-specific information. If it does, consider the use of the following HTTP respo

Description: Storable and Cacheable Content: The response contents are storable by caching components such as proxy servers, and may be retrieved...

Location: `https://example.com`

```
// AI REMEDIATION MANIFEST
Target_File: https://example.com
Target_Line: N/A
Issue_Type: 10049
Severity: LOW
Category: n/a
```

Instruction: Fix the issue described below.

"Storable and Cacheable Content: The response contents are storable by caching components such as proxy servers, and may be retrieved..."

Suggested Remedy: Validate that the response does not contain sensitive, personal or user-specific information. If it does, consider the use of the following HTTP respo

Component Evaluator Findings

Why it matters: Directly exposes the application or its data to attack.

Description: State-changing endpoint POST /api/login has no authentication middleware — it can be invoked by anyone.

Location: `src/components/extractors/api.test.ts:29`

```
// AI REMEDIATION MANIFEST
Target_File: src/components/extractors/api.test.ts
Target_Line: 29
Issue_Type: COMP-ENDPOINT-NOAUTH
Severity: HIGH
Category: security
```

Instruction: Fix the issue described below.

"State-changing endpoint POST /api/login has no authentication middleware — it can be invoked by anyone."

Suggested Remedy: Require authentication before mutating state (e.g. add `requireAuth/isAuthenticated` middleware or verify the session/token in the handler).

Why it matters: Directly exposes the application or its data to attack.

Description: State-changing endpoint POST /api/transfer has no authentication middleware — it can be invoked by anyone.

Location: `src/evaluators/component/evaluator.test.ts:99`

```
// AI REMEDIATION MANIFEST
Target_File: src/evaluators/component/evaluator.test.ts
Target_Line: 99
Issue_Type: COMP-ENDPOINT-NOAUTH
Severity: HIGH
Category: security

Instruction: Fix the issue described below.
"State-changing endpoint POST /api/transfer has no authentication
middleware — it can be invoked by anyone."

Suggested_Remedies: Require authentication before mutating state (e.g. add
requireAuth/isAuthenticated middleware or verify the session/token in
the handler).
```

Why it matters: The app fails unpredictably under load, bad input, or upstream outages.

Description: API call GET /api/orders/42 has no timeout/abort — a hung upstream can freeze the request indefinitely (availability risk).

Location: `src/components/builder.test.ts:39`

```
// AI REMEDIATION MANIFEST
Target_File: src/components/builder.test.ts
Target_Line: 39
Issue_Type: COMP-APICALL-NO-TIMEOUT
Severity: MEDIUM
Category: robustness

Instruction: Fix the issue described below.
"API call GET /api/orders/42 has no timeout/abort — a hung upstream can
freeze the request indefinitely (availability risk)."
```

Suggested_Remedies: Pass an AbortController signal (or a timeout) so the
call fails fast instead of hanging.

Why it matters: The app fails unpredictably under load, bad input, or upstream outages.

Description: API call POST /api/login has no timeout/abort — a hung upstream can freeze the request indefinitely (availability risk).

Location: `src/components/extractors/react.test.ts:24`

```
// AI REMEDIATION MANIFEST
Target_File: src/components/extractors/react.test.ts
Target_Line: 24
Issue_Type:  COMP-APICALL-NO-TIMEOUT
Severity:    MEDIUM
Category:    robustness

Instruction: Fix the issue described below.
"API call POST /api/login has no timeout/abort — a hung upstream can
freeze the request indefinitely (availability risk)."
```

Suggested_Remedies: Pass an AbortController signal (or a timeout) so the
call fails fast instead of hanging.

Why it matters: The app fails unpredictably under load, bad input, or upstream outages.

Description: API call GET /api/profile has no timeout/abort — a hung upstream can freeze the request indefinitely (availability risk).

Location: `src/components/extractors/react.test.ts:27`

```
// AI REMEDIATION MANIFEST
Target_File: src/components/extractors/react.test.ts
Target_Line: 27
Issue_Type:  COMP-APICALL-NO-TIMEOUT
Severity:    MEDIUM
Category:    robustness

Instruction: Fix the issue described below.
"API call GET /api/profile has no timeout/abort — a hung upstream can
freeze the request indefinitely (availability risk)."
```

Suggested_Remedies: Pass an AbortController signal (or a timeout) so the
call fails fast instead of hanging.

Why it matters: The app fails unpredictably under load, bad input, or upstream outages.

Description: API call GET url has no timeout/abort — a hung upstream can freeze the request indefinitely (availability risk).

Location: `src/components/extractors/react.ts:118`

```
// AI REMEDIATION MANIFEST
Target_File: src/components/extractors/react.ts
Target_Line: 118
Issue_Type:  COMP-APICALL-NO-TIMEOUT
Severity:    MEDIUM
Category:    robustness

Instruction: Fix the issue described below.
"API call GET url has no timeout/abort — a hung upstream can freeze the
request indefinitely (availability risk)."
```

Suggested_Remedies: Pass an AbortController signal (or a timeout) so the call fails fast instead of hanging.

Why it matters: The app fails unpredictably under load, bad input, or upstream outages.

Description: API call GET url has no timeout/abort — a hung upstream can freeze the request indefinitely (availability risk).

Location: `src/components/extractors/react.ts:124`

```
// AI REMEDIATION MANIFEST
Target_File: src/components/extractors/react.ts
Target_Line: 124
Issue_Type:  COMP-APICALL-NO-TIMEOUT
Severity:    MEDIUM
Category:    robustness

Instruction: Fix the issue described below.
"API call GET url has no timeout/abort — a hung upstream can freeze the
request indefinitely (availability risk)."
```

Suggested_Remedies: Pass an AbortController signal (or a timeout) so the call fails fast instead of hanging.

Why it matters: The app fails unpredictably under load, bad input, or upstream outages.

Description: State-changing API call POST url has no error handling — a failed request fails silently or crashes the UI.

Location: `src/components/extractors/react.ts:124`

```
// AI REMEDIATION MANIFEST
Target_File: src/components/extractors/react.ts
Target_Line: 124
Issue_Type:  COMP-APICALL-NO-ERROR-HANDLING
Severity:     MEDIUM
Category:     robustness

Instruction: Fix the issue described below.
"State-changing API call POST url has no error handling — a failed
request fails silently or crashes the UI."

Suggested_Remedey: Wrap the call in try/catch (or add .catch) and surface
the failure to the user; never assume a mutating request succeeds.
```

Why it matters: The app fails unpredictably under load, bad input, or upstream outages.

Description: State-changing API call POST /api/transfer has no error handling — a failed request fails silently or crashes the UI.

Location: `src/evaluators/component/evaluator.test.ts:101`

```
// AI REMEDIATION MANIFEST
Target_File: src/evaluators/component/evaluator.test.ts
Target_Line: 101
Issue_Type:  COMP-APICALL-NO-ERROR-HANDLING
Severity:     MEDIUM
Category:     robustness

Instruction: Fix the issue described below.
"State-changing API call POST /api/transfer has no error handling — a
failed request fails silently or crashes the UI."

Suggested_Remedey: Wrap the call in try/catch (or add .catch) and surface
the failure to the user; never assume a mutating request succeeds.
```

Why it matters: The app fails unpredictably under load, bad input, or upstream outages.

Description: API call POST /api/transfer has no timeout/abort — a hung upstream can freeze the request indefinitely (availability risk).

Location: `src/evaluators/component/evaluator.test.ts:101`

```
// AI REMEDIATION MANIFEST
Target_File: src/evaluators/component/evaluator.test.ts
Target_Line: 101
Issue_Type:  COMP-APICALL-NO-TIMEOUT
Severity:    MEDIUM
Category:    robustness

Instruction: Fix the issue described below.
"API call POST /api/transfer has no timeout/abort — a hung upstream can
freeze the request indefinitely (availability risk)."
```

Suggested_Remedies: Pass an AbortController signal (or a timeout) so the call fails fast instead of hanging.

Why it matters: The app fails unpredictably under load, bad input, or upstream outages.

Description: State-changing API call POST \${url}/api/v2/import-scan/ has no error handling — a failed request fails silently or crashes the UI.

Location: `src/reporters/defectdojo.ts:23`

```
// AI REMEDIATION MANIFEST
Target_File: src/reporters/defectdojo.ts
Target_Line: 23
Issue_Type:  COMP-APICALL-NO-ERROR-HANDLING
Severity:    MEDIUM
Category:    robustness

Instruction: Fix the issue described below.
"State-changing API call POST ${url}/api/v2/import-scan/ has no error
handling — a failed request fails silently or crashes the UI."
```

Suggested_Remedies: Wrap the call in try/catch (or add .catch) and surface the failure to the user; never assume a mutating request succeeds.

Why it matters: The app fails unpredictably under load, bad input, or upstream outages.

Description: API call POST `${url}/api/v2/import-scan/` has no timeout/abort — a hung upstream can freeze the request indefinitely (availability risk).

Location: `src/reporters/defectdojo.ts:23`

```
// AI REMEDIATION MANIFEST
Target_File: src/reporters/defectdojo.ts
Target_Line: 23
Issue_Type: COMP-APICALL-NO-TIMEOUT
Severity: MEDIUM
Category: robustness

Instruction: Fix the issue described below.
"API call POST ${url}/api/v2/import-scan/ has no timeout/abort — a hung
upstream can freeze the request indefinitely (availability risk)."
```

Suggested_Remedies: Pass an AbortController signal (or a timeout) so the call fails fast instead of hanging.

Why it matters: Directly exposes the application or its data to attack.

Description: `aws_security_group "allow_all"` allows ingress from the entire internet (0.0.0.0/0) on port(s) 0.

Location: `testing_data/main.tf:23`

```
// AI REMEDIATION MANIFEST
Target_File: testing_data/main.tf
Target_Line: 23
Issue_Type: COMP-NET-OPEN-WORLD
Severity: MEDIUM
Category: security

Instruction: Fix the issue described below.
"aws_security_group "allow_all" allows ingress from the entire internet
(0.0.0.0/0) on port(s) 0."
```

Suggested_Remedies: Scope ingress CIDRs to the minimum required ranges; reserve 0.0.0.0/0 for genuinely public ports (80/443) behind a WAF/LB.

Why it matters: Mismatches cause runtime failures that unit tests miss.

Description: GET /api/orders/42 (src/components/builder.test.ts) calls GET /api/orders/:id, which requires authentication, but sends no Authorization header — this request will be rejected.

Location: src/components/builder.test.ts:39

```
// AI REMEDIATION MANIFEST
Target_File: src/components/builder.test.ts
Target_Line: 39
Issue_Type:  COMP-CROSSSTACK-AUTH-MISMATCH
Severity:     MEDIUM
Category:    coherence
```

Instruction: Fix the issue described below.

"GET /api/orders/42 (src/components/builder.test.ts) calls GET /api/orders/:id, which requires authentication, but sends no Authorization header — this request will be rejected."

Suggested Remedy: Attach the auth token (Authorization header) to the client call, or relax the endpoint if it is meant to be public.

Why it matters: Mismatches cause runtime failures that unit tests miss.

Description: GET /api/profile (src/components/extractors/react.test.ts) calls GET /api/profile, which requires authentication, but sends no Authorization header — this request will be rejected.

Location: src/components/extractors/react.test.ts:27

```
// AI REMEDIATION MANIFEST
Target_File: src/components/extractors/react.test.ts
Target_Line: 27
Issue_Type:  COMP-CROSSSTACK-AUTH-MISMATCH
Severity:     MEDIUM
Category:     coherence
```

Instruction: Fix the issue described below.

"GET /api/profile (src/components/extractors/react.test.ts) calls GET /api/profile, which requires authentication, but sends no Authorization header — this request will be rejected."

Suggested Remedy: Attach the auth token (Authorization header) to the client call, or relax the endpoint if it is meant to be public.