


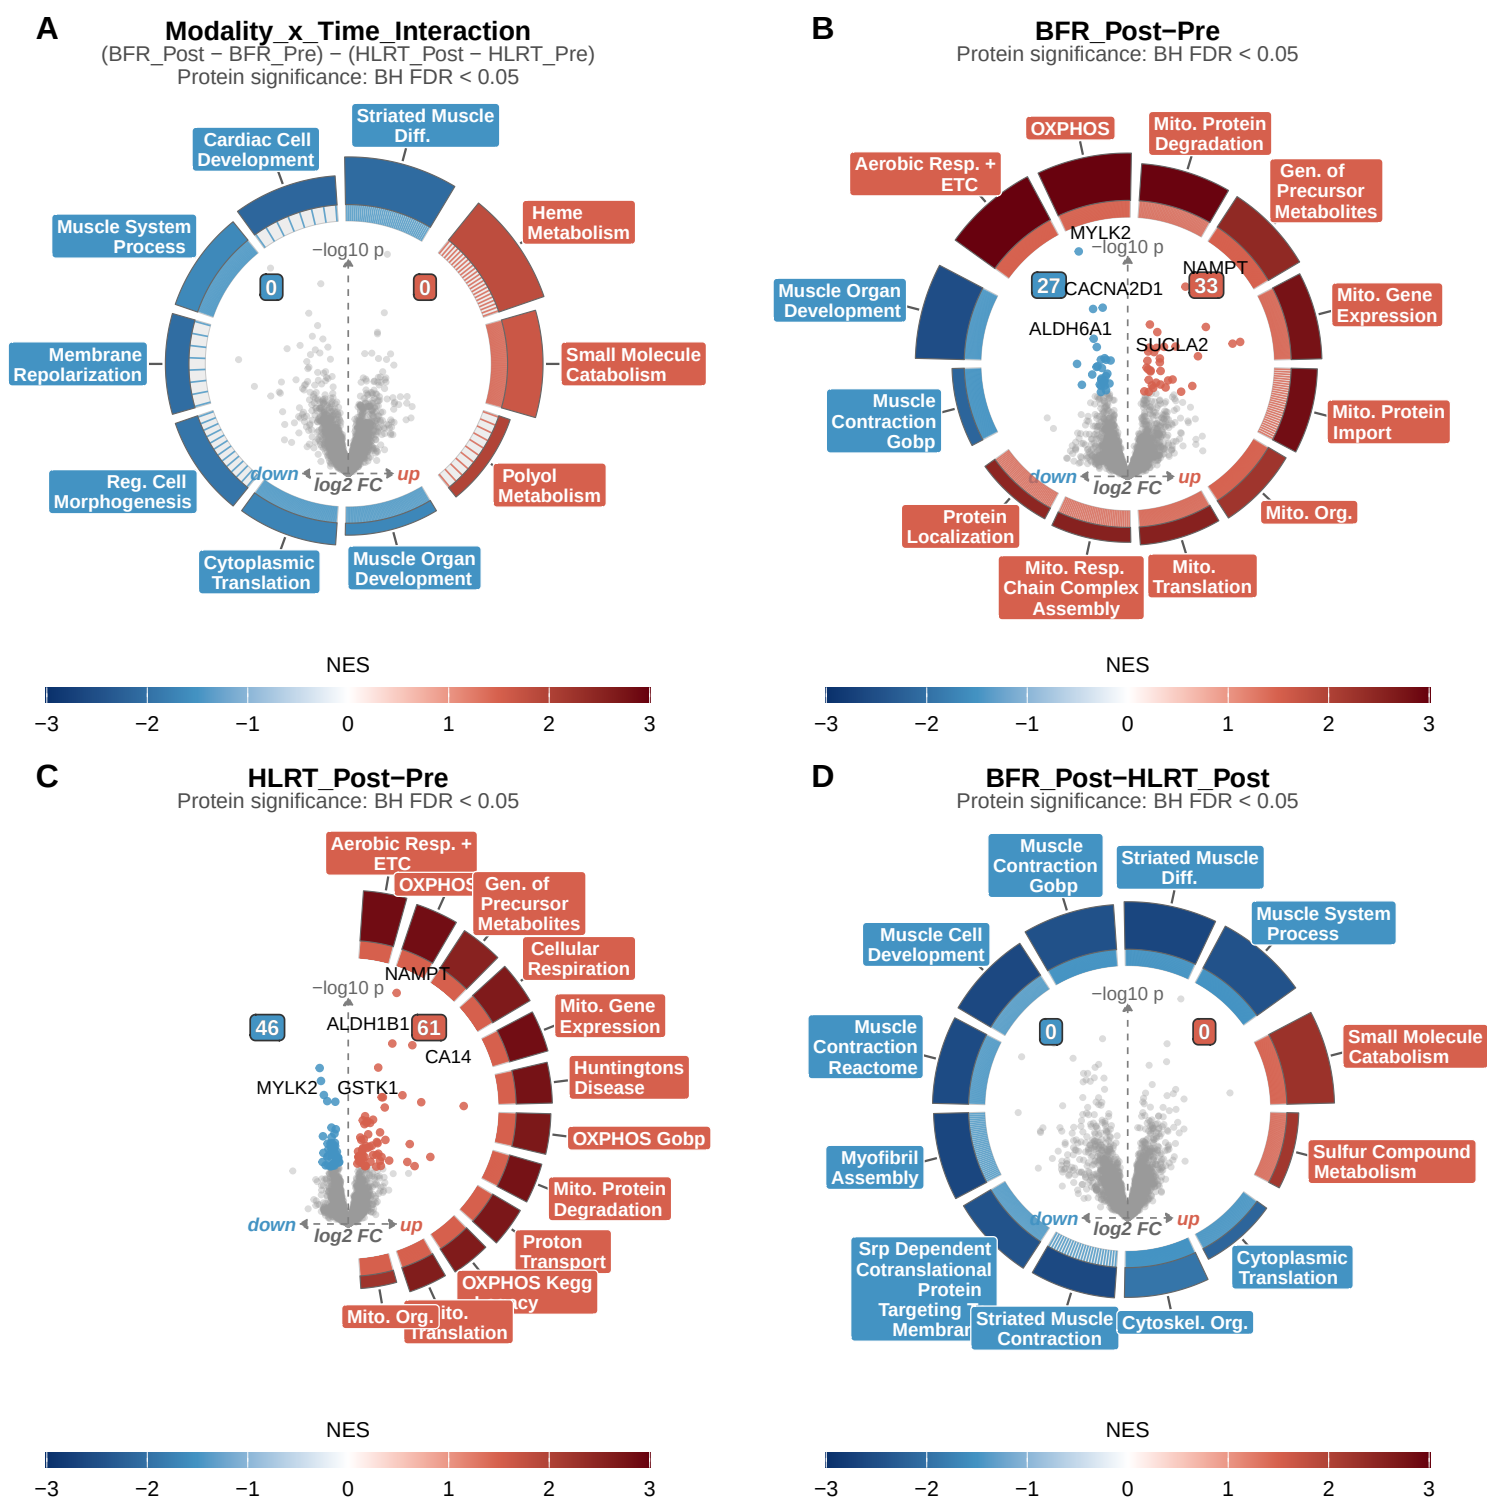


S8 Figure. Protein volcanoes with fgsea rings. (A) Modality\_x\_Time\_Interaction. (B) BFR\_Post-Pre. (C) HLRT\_Post-Pre. (D) BFR\_Post-HLRT\_Post. Points are proteins, coloured when BH FDR < 0.05 within the contrast, with the five lowest-FDR proteins named. The ring shows up to twelve fgsea sets that survived collapsePathways, lowest adjusted p first, in either direction, coloured by NES; ticks mark their leading-edge proteins. Protein colour and counts read protein-level BH FDR, the ring set-level fgsea FDR: two separate claims. Data: protein\_results and set\_tests sheets of 01\_run\_fgsea\_and\_fry.xlsx.

**A**

### BFR\_Post-Pre


Labels ranked by pi-score; colours and counts use BH FDR

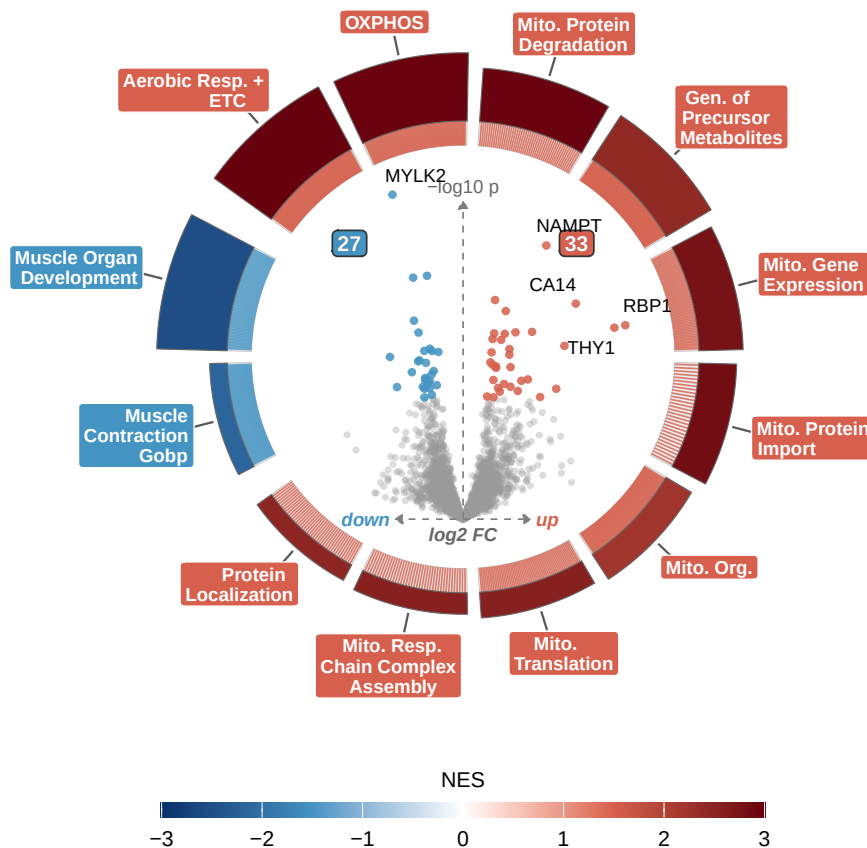

**B**

### HLRT\_Post-Pre

Labels ranked by pi-score; colours and counts use BH FDR

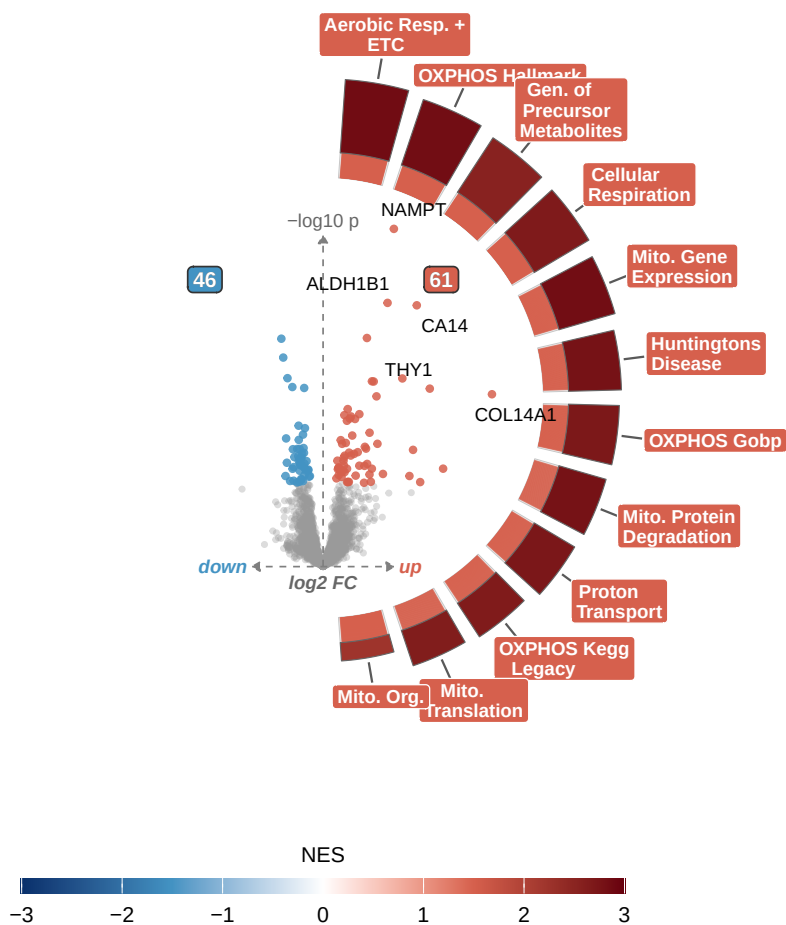

S9 Figure. Training volcanoes, pi-score labels. (A) BFR\_Post-Pre. (B) HLRT\_Post-Pre. As S8 Figure, but the five proteins named are those with the smallest pi-score,  $P.Value^{|logFC|}$  (Xiao et al. 2014). Pi controls no error rate, so no protein named here is a discovery. The ring shows up to twelve fgsea sets that survived collapsePathways, lowest adjusted p first, in either direction, coloured by NES; ticks mark their leading-edge proteins.

Protein colour and counts read protein-level BH FDR, the ring set-level fgsea FDR: two separate claims. Data: protein\_results and set\_tests sheets of 01\_run\_fgsea\_and\_fry.xlsx.