
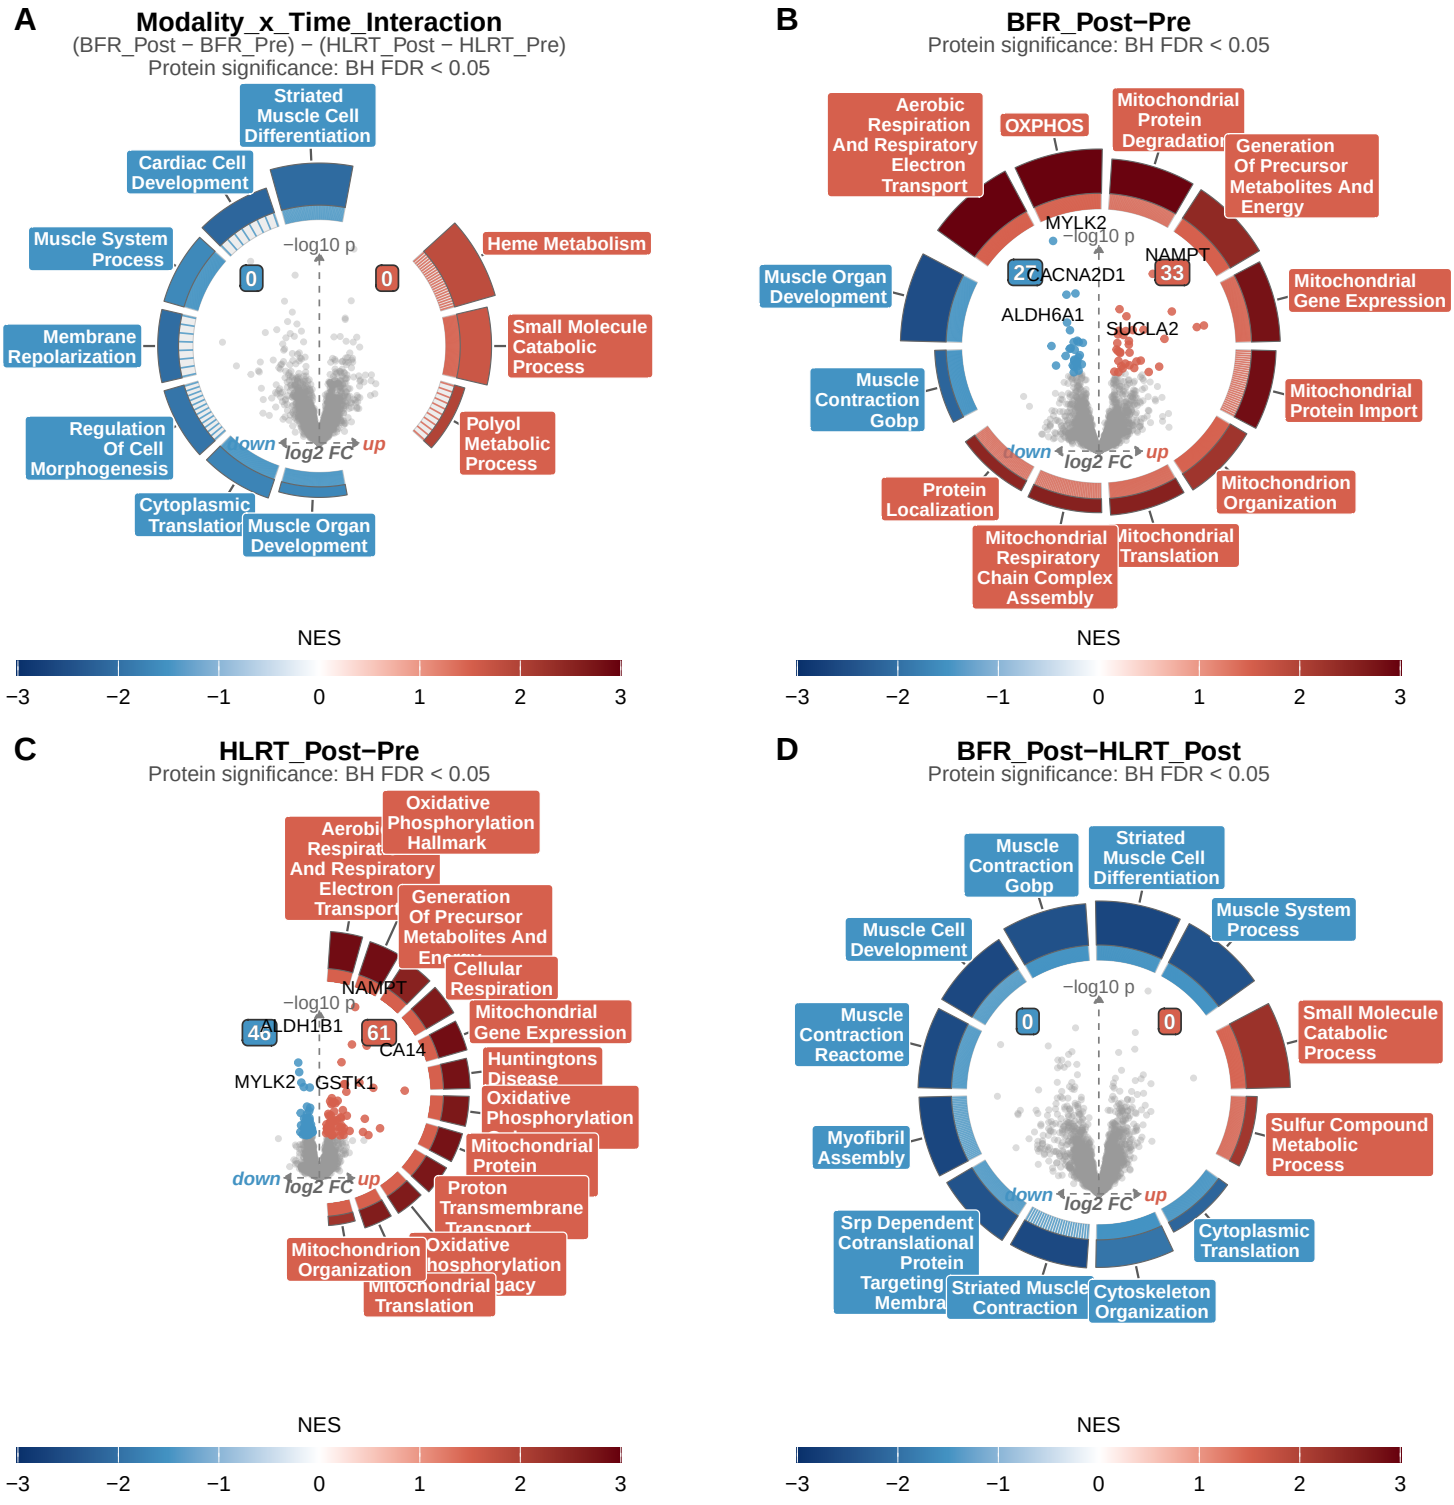


S8 Figure. Protein volcanoes with collapse−surviving fgsea sets ringed. (A) Modality_x_Time_Interaction. (B) BFR_Post−Pre. (C) HLRT_Post−Pre. (D) BFR_Post−HLRT_Post. Points are proteins, coloured when BH FDR < 0.05 within the contrast, with the five lowest−FDR proteins named. fry finds no set for panels A and D. The ring shows up to twelve fgsea sets that survived collapsePathways, lowest adjusted p first, in either direction, coloured by NES; ticks mark their leading−edge proteins. Protein colour and counts read protein−level BH FDR, the ring set−level fgsea FDR: two separate claims. Data: protein_results and set_tests sheets of 01_run_fgsea_and_fry.xlsx.

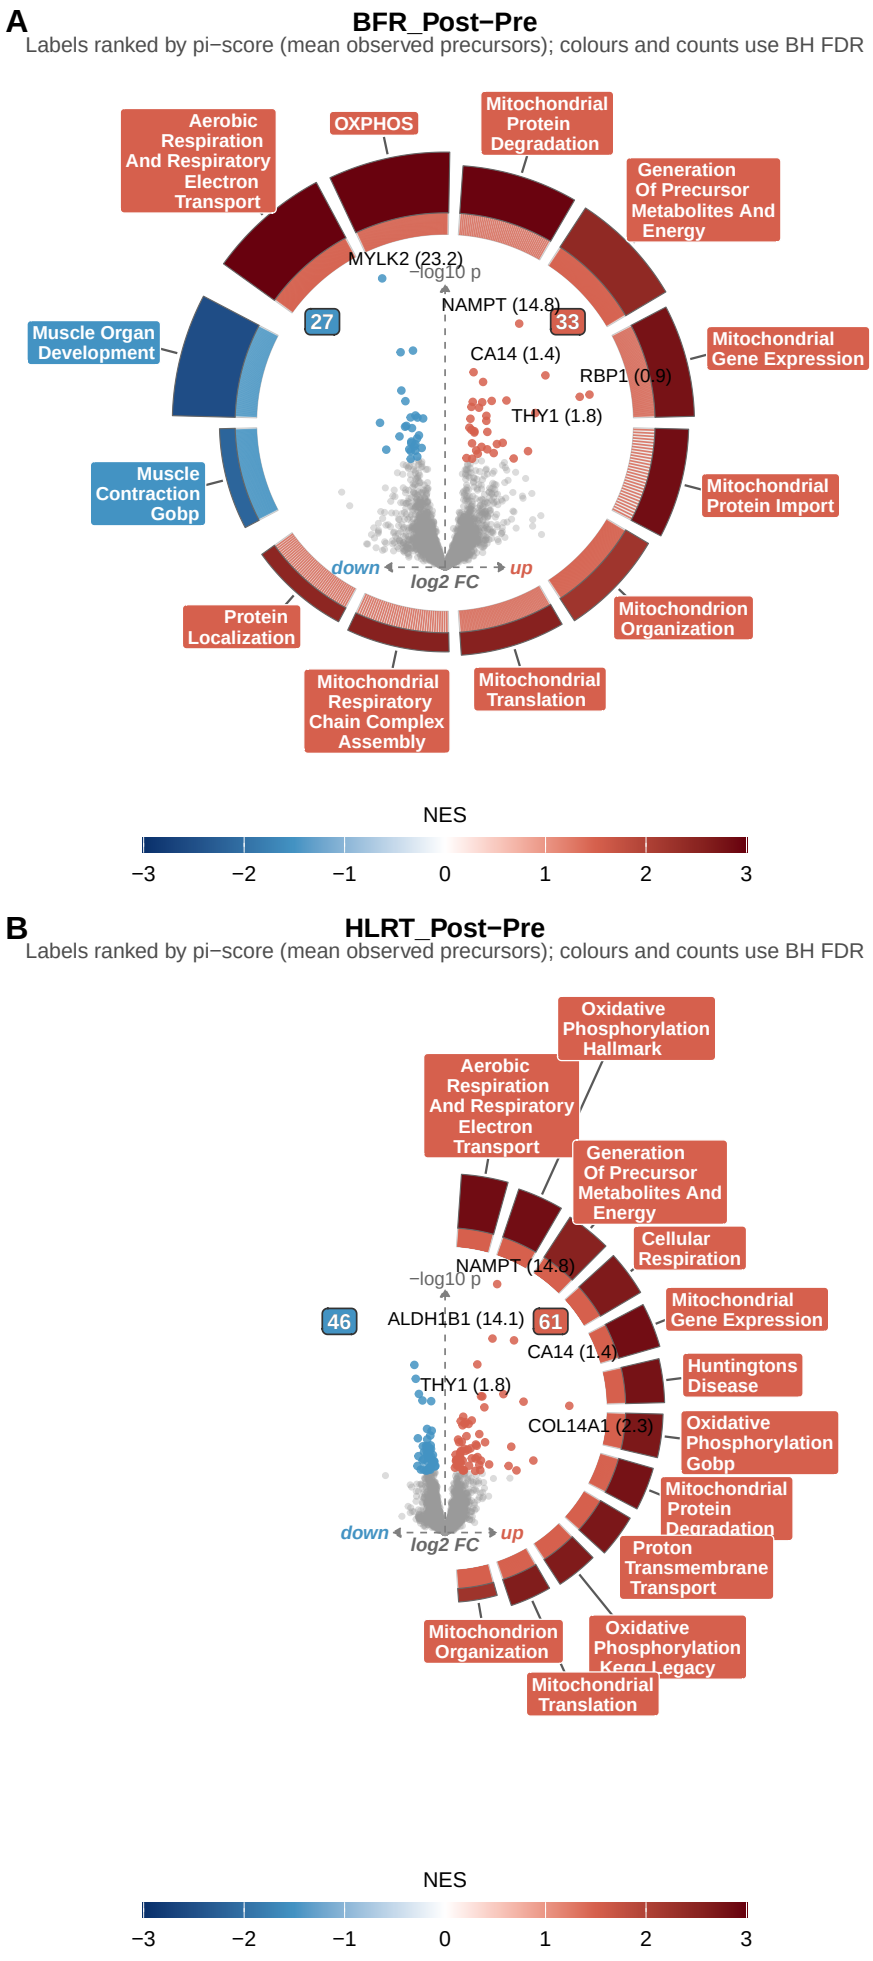

S9 Figure. Protein volcanoes labelled by pi−score. (A) BFR_Post−Pre. (B) HLRT_Post−Pre. As S8 Figure, but the five proteins named are those with the smallest pi−score, P.Value^|logFC| (Xiao et al. 2014), each followed by its mean observed precursors per sample in brackets. Pi controls no error rate, so no protein named here is a discovery. The ring shows up to twelve fgsea sets that survived collapsePathways, lowest adjusted p first, in either direction, coloured by NES; ticks mark their leading−edge proteins. Protein colour and counts read protein−level BH FDR, the ring set−level fgsea FDR: two separate claims. Data: protein_results and set_tests sheets of 01_run_fgsea_and_fry.xlsx.