

Sample model overview: proteins

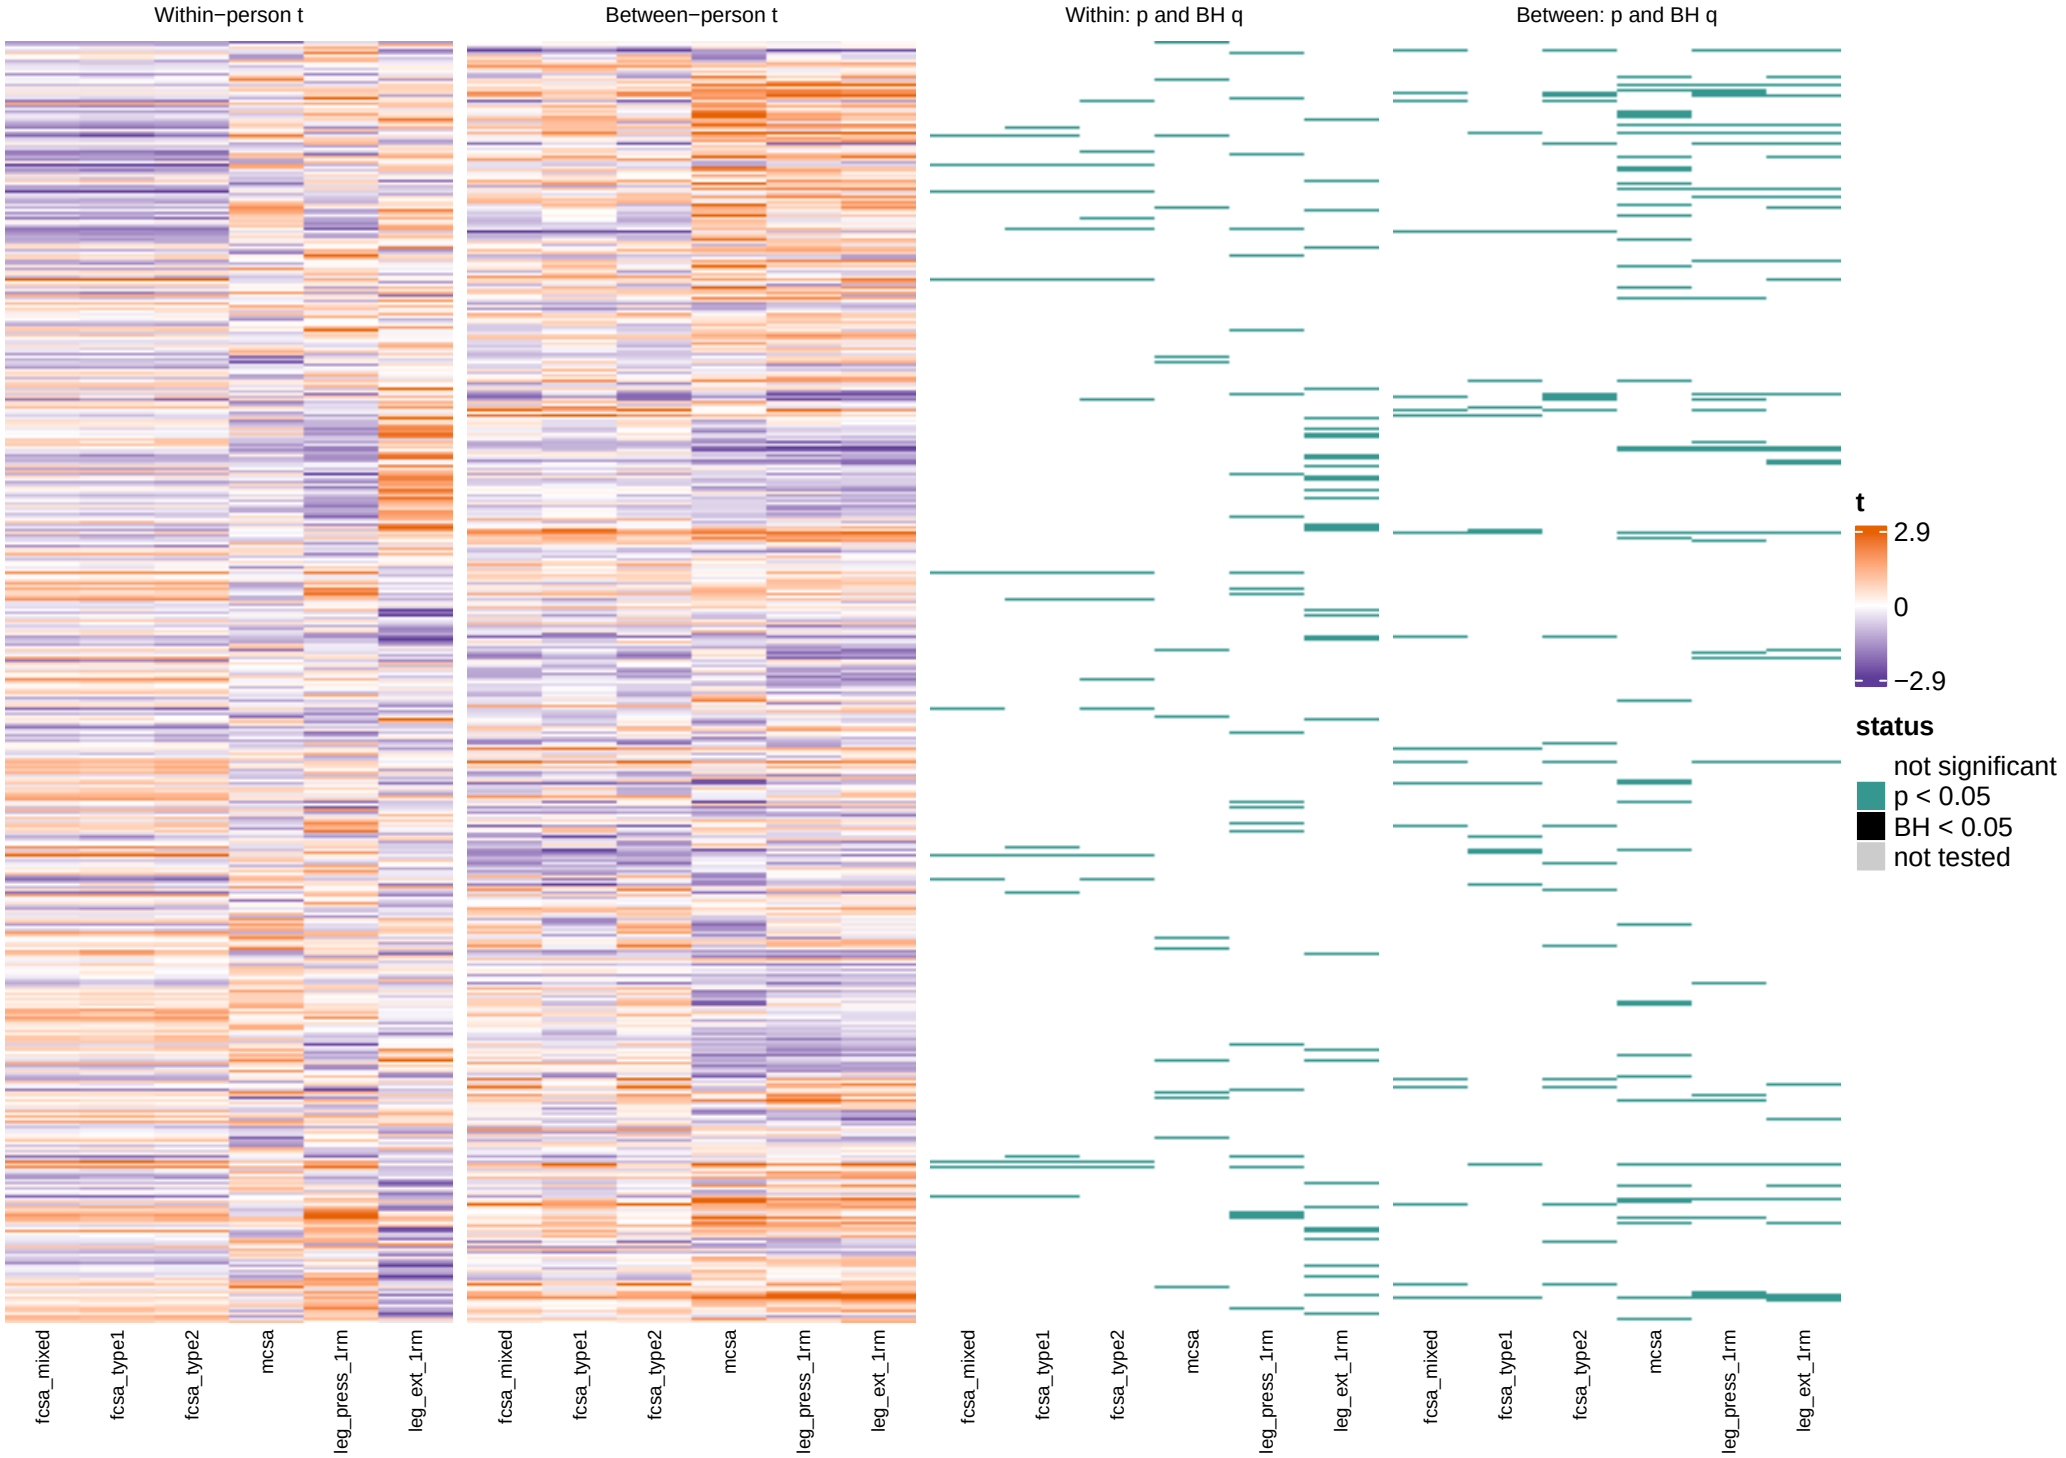


All 1,900 proteins, one row each. Moderated t of the within and between terms, abundance ~ timepoint + between + within, subject blocked. Colours stop at the 99th percentile of |t|, 2.9.
Rows are ordered by average−linkage clustering (1 − Pearson r) of limpa's matrix, for display only. Grey: not tested. Table: c_data/01_proteins.xlsx, model.

Change score overview, training window: proteins

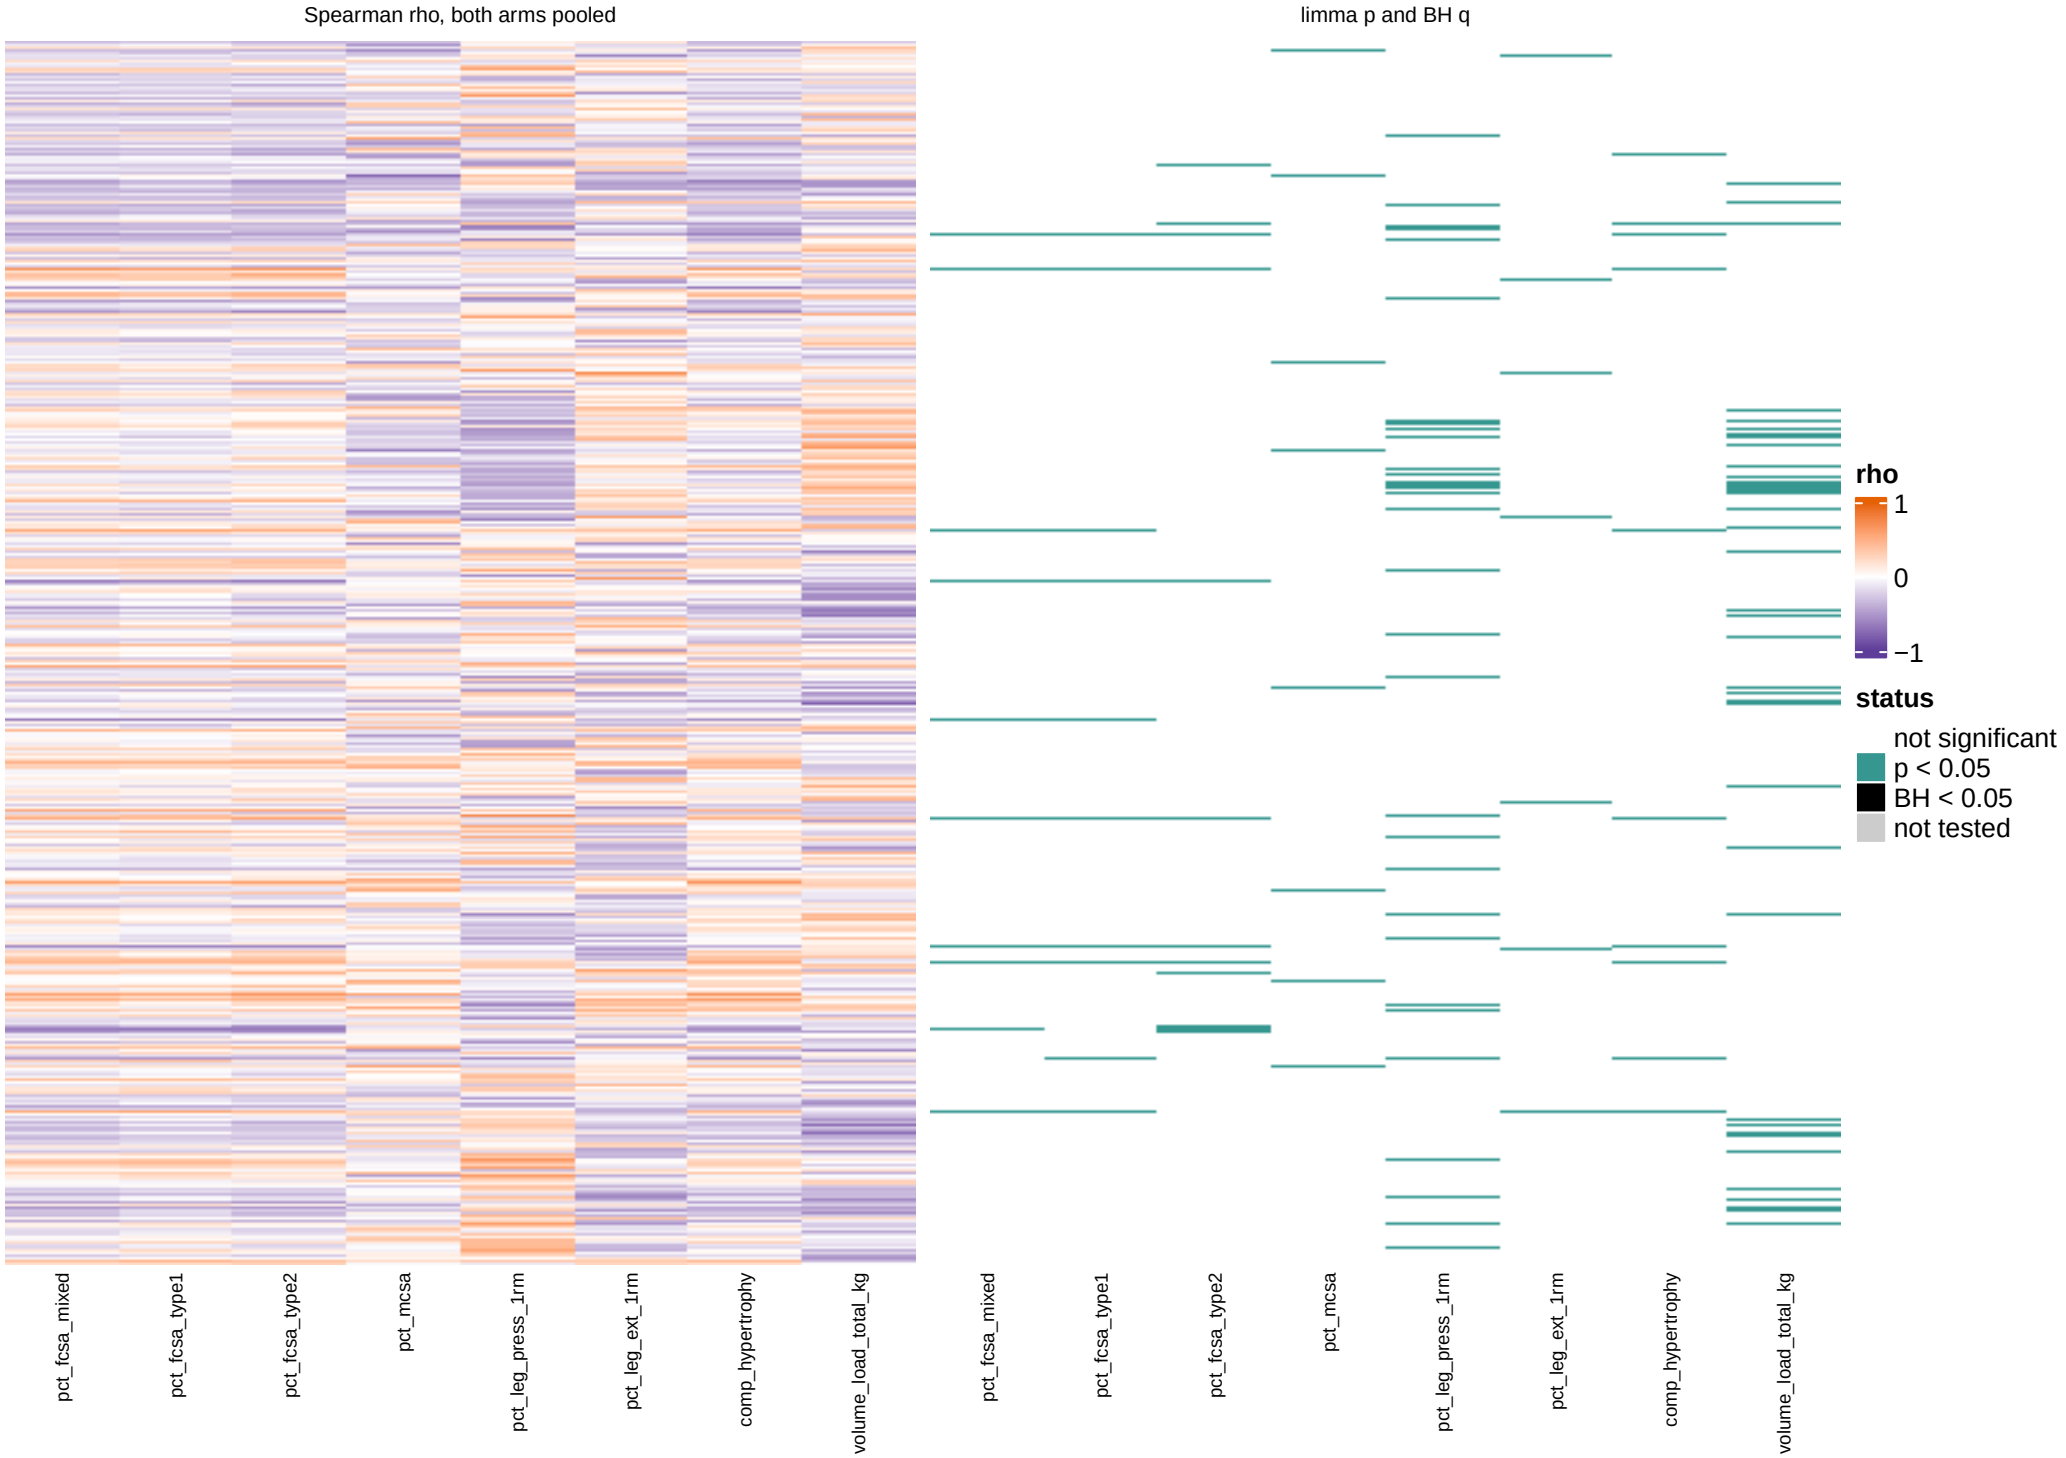


All 1,900 proteins, one row each. Spearman rho between the log2 abundance (change, T1 to T2) and each outcome; status from limma. Rows are ordered by average−linkage clustering (1 − Pearson r) of limpa's matrix, for display only. Grey: not tested. Table: c_data/01_proteins.xlsx, change_score.

Change score overview, baseline window: proteins

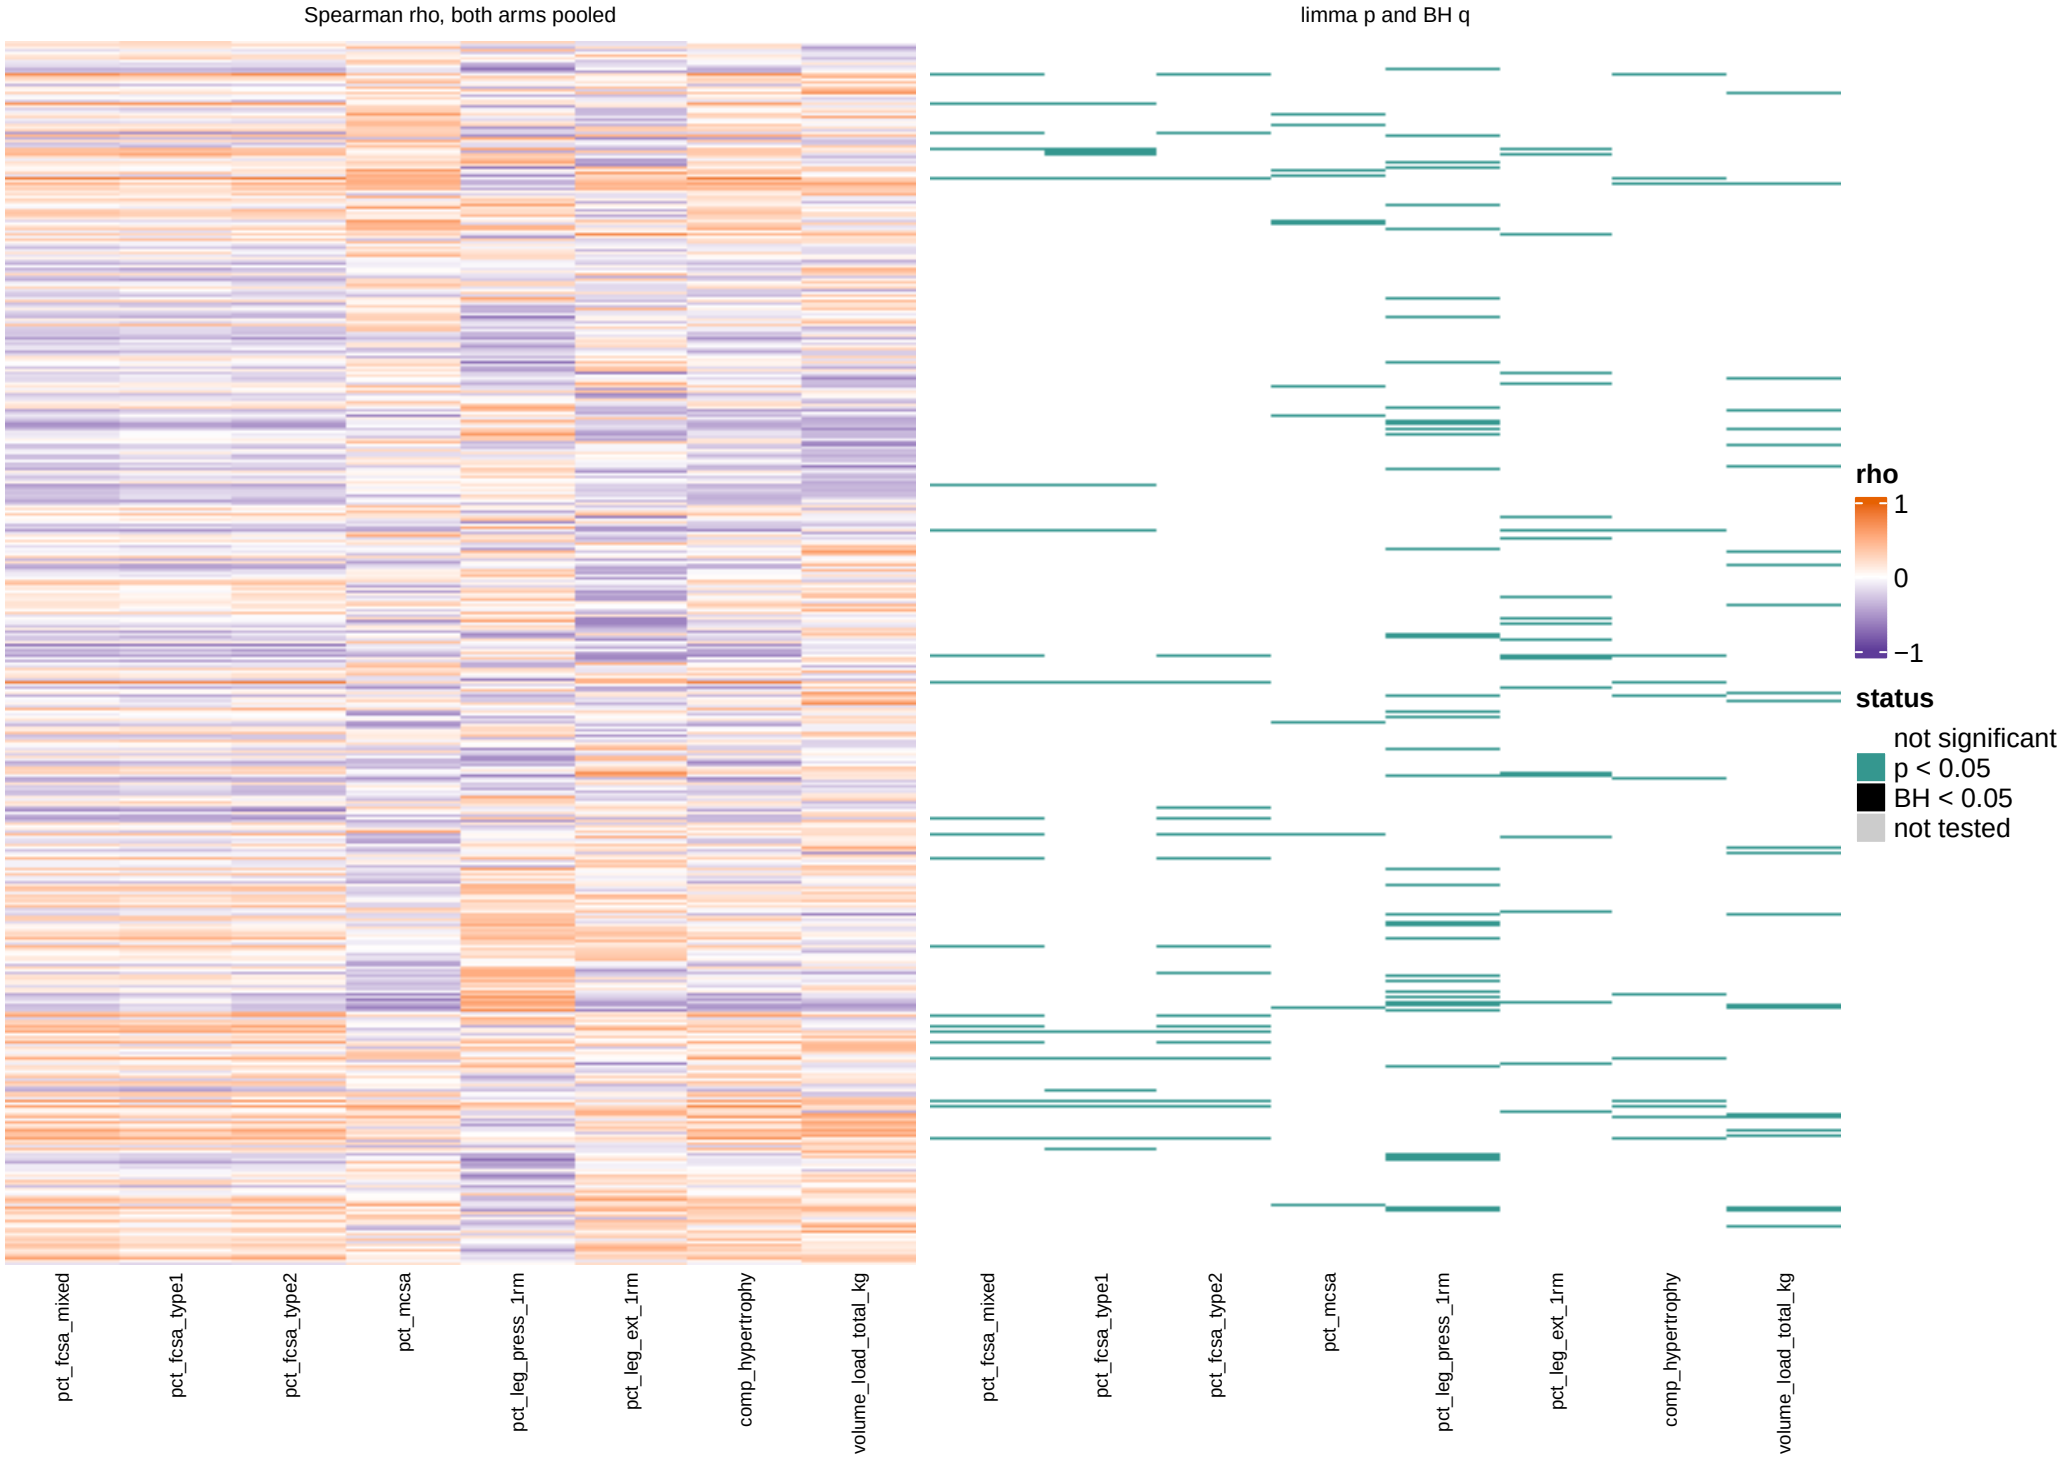


All 1,900 proteins, one row each. Spearman rho between the log2 abundance (T1 level) and each outcome; status from limma. Rows are ordered by average−linkage clustering (1 − Pearson r) of limpa's matrix, for display only. Grey: not tested. Table: c_data/01_proteins.xlsx, change_score.

Change score overview, acute window: proteins

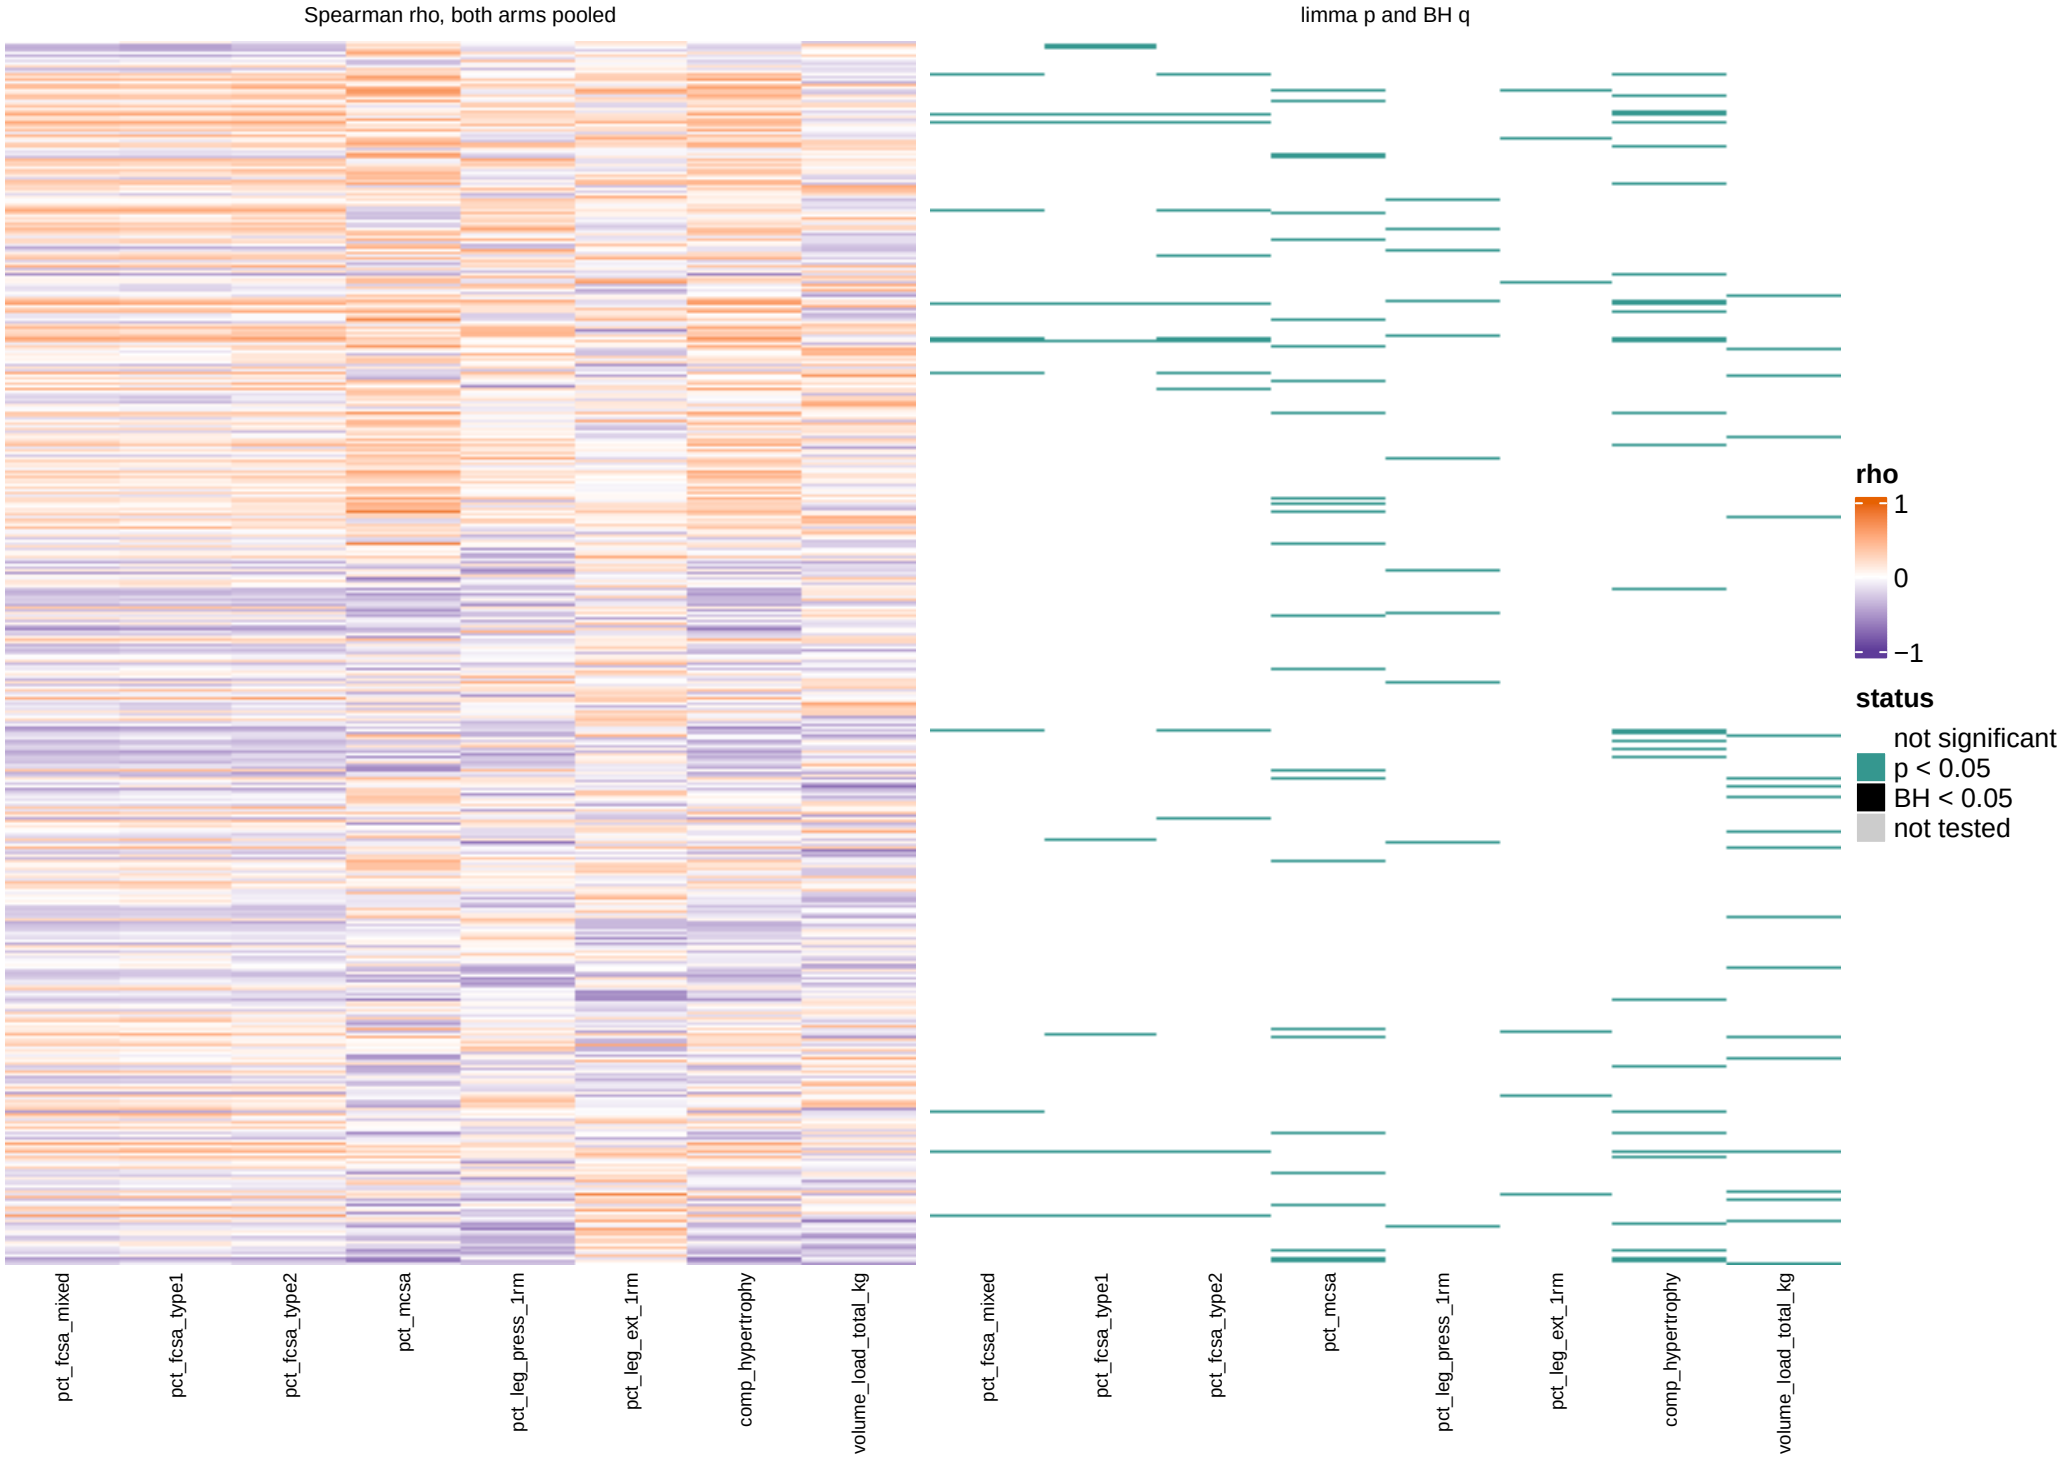


All 1,900 proteins, one row each. Spearman rho between the log2 abundance (change, T2 to T3) and each outcome; status from limma. Rows are ordered by average−linkage clustering (1 − Pearson r) of limpa's matrix, for display only. Grey: not tested. Table: c_data/01_proteins.xlsx, change_score.

Change score overview, baseline_level window: proteins

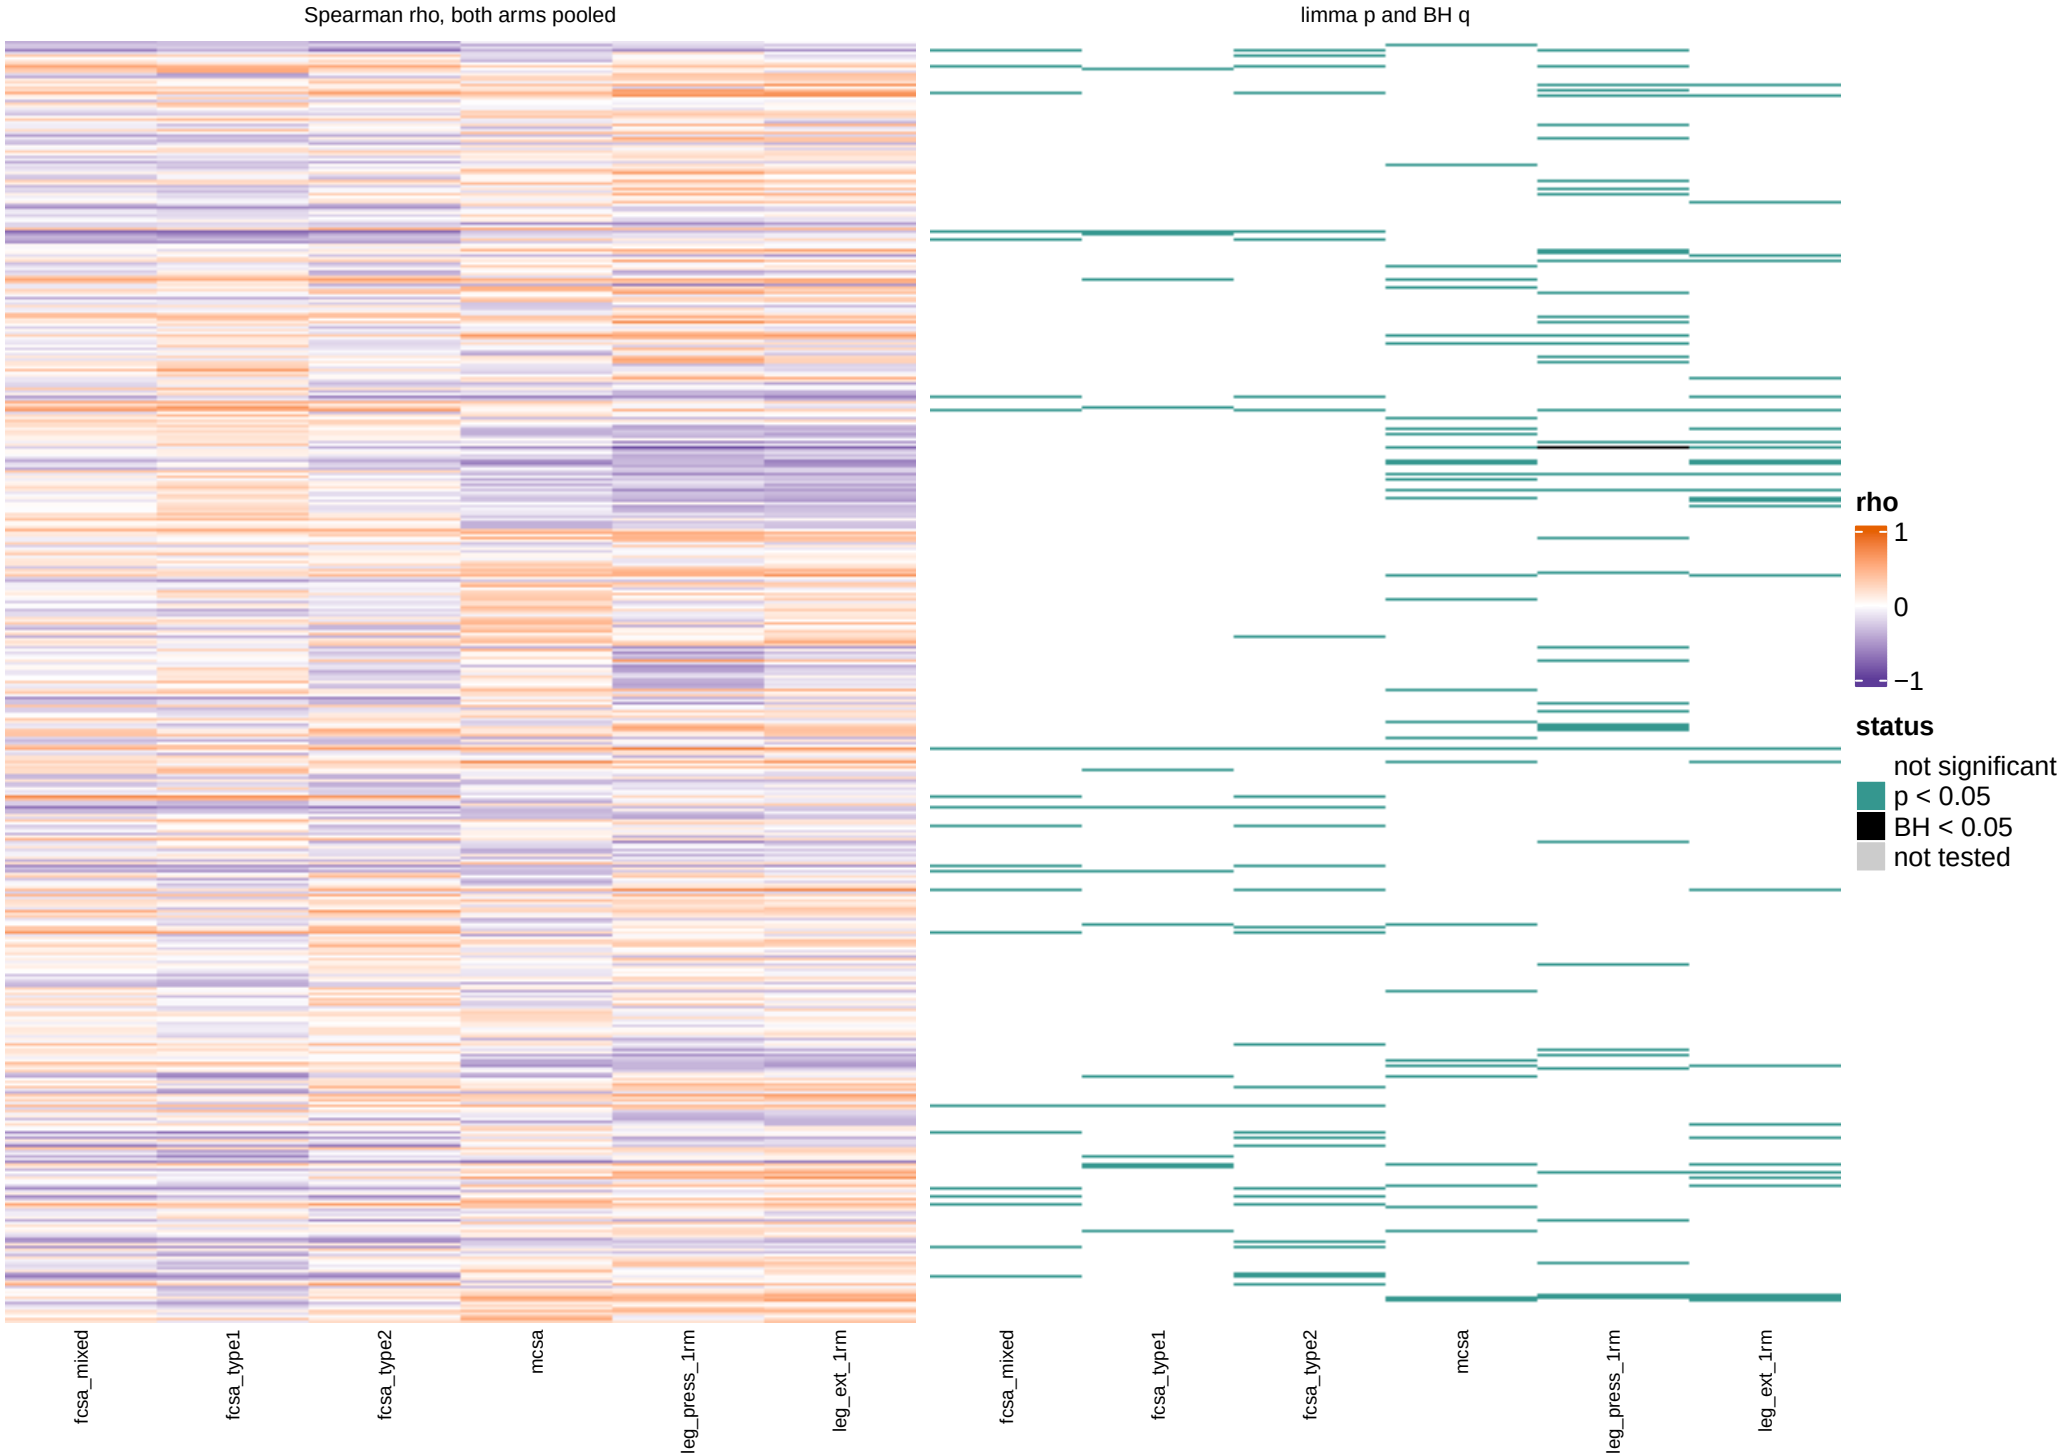


All 1,900 proteins, one row each. Spearman rho between the log2 abundance (T1 level) and each outcome; status from limma. Rows are ordered by average−linkage clustering (1 − Pearson r) of limpa's matrix, for display only. Grey: not tested. Table: c_data/01_proteins.xlsx, change_score.

Change score overview, post_level window: proteins

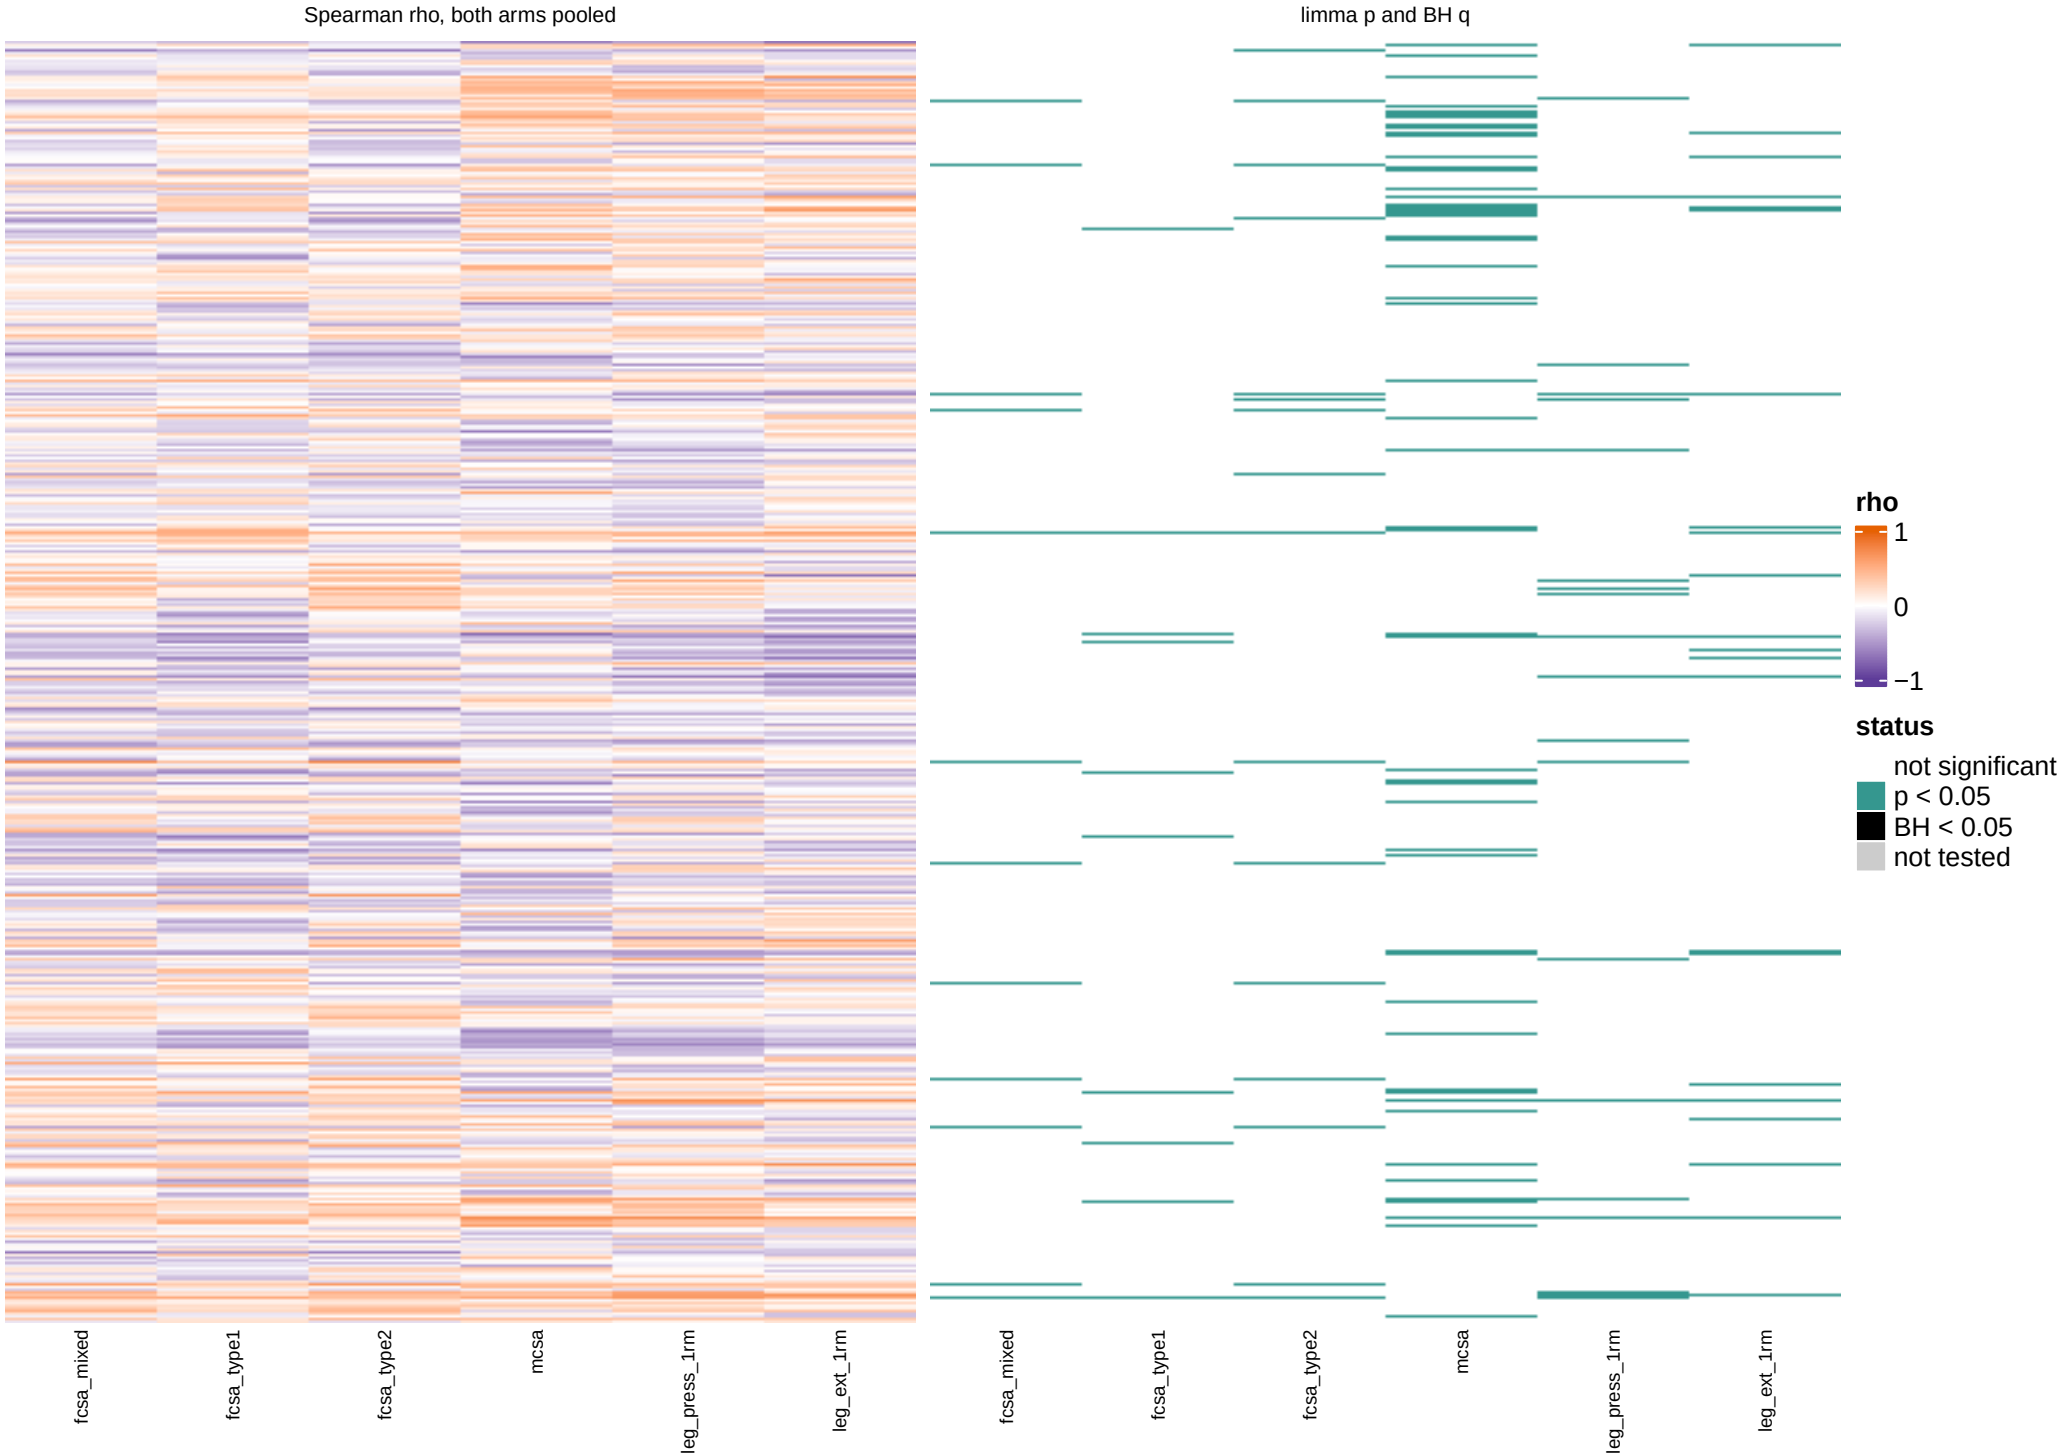

All 1,900 proteins, one row each. Spearman rho between the log2 abundance (T2 level) and each outcome; status from limma. Rows are ordered by average−linkage clustering (1 − Pearson r) of limpa's matrix, for display only. Grey: not tested. Table: c_data/01_proteins.xlsx, change_score.


Change score overview, post_bout_level window: proteins

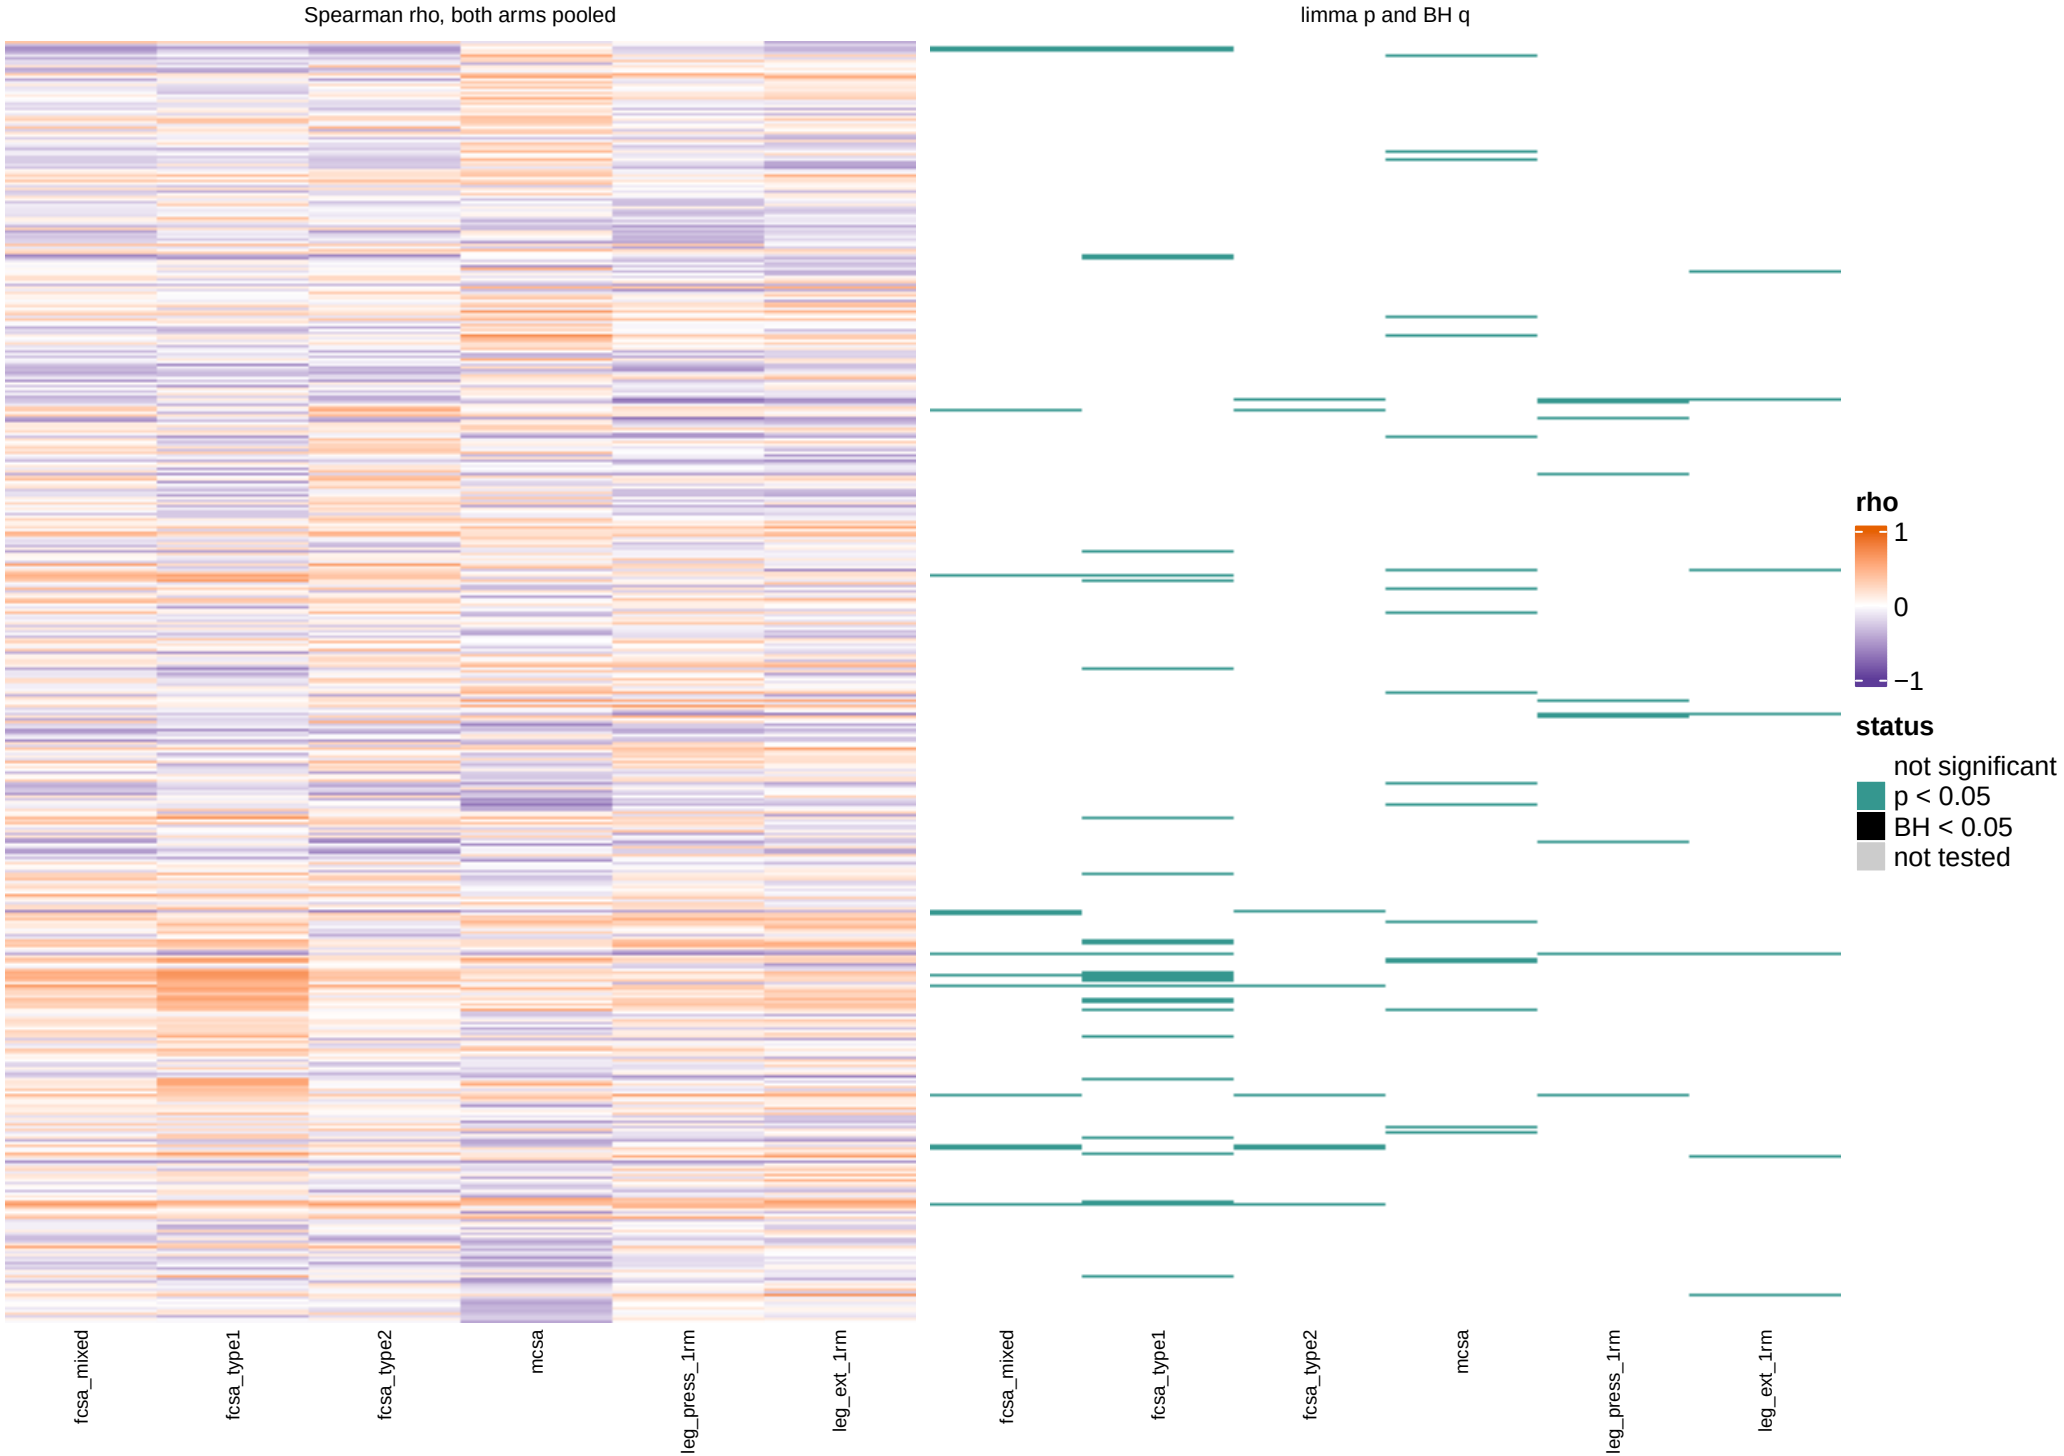

All 1,900 proteins, one row each. Spearman rho between the log2 abundance (T3 level) and each outcome; status from limma. Rows are ordered by average−linkage clustering (1 − Pearson r) of limpa's matrix, for display only. Grey: not tested. Table: c_data/01_proteins.xlsx, change_score.

fcsa_mixed, within−person term


62 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 1 of 6.

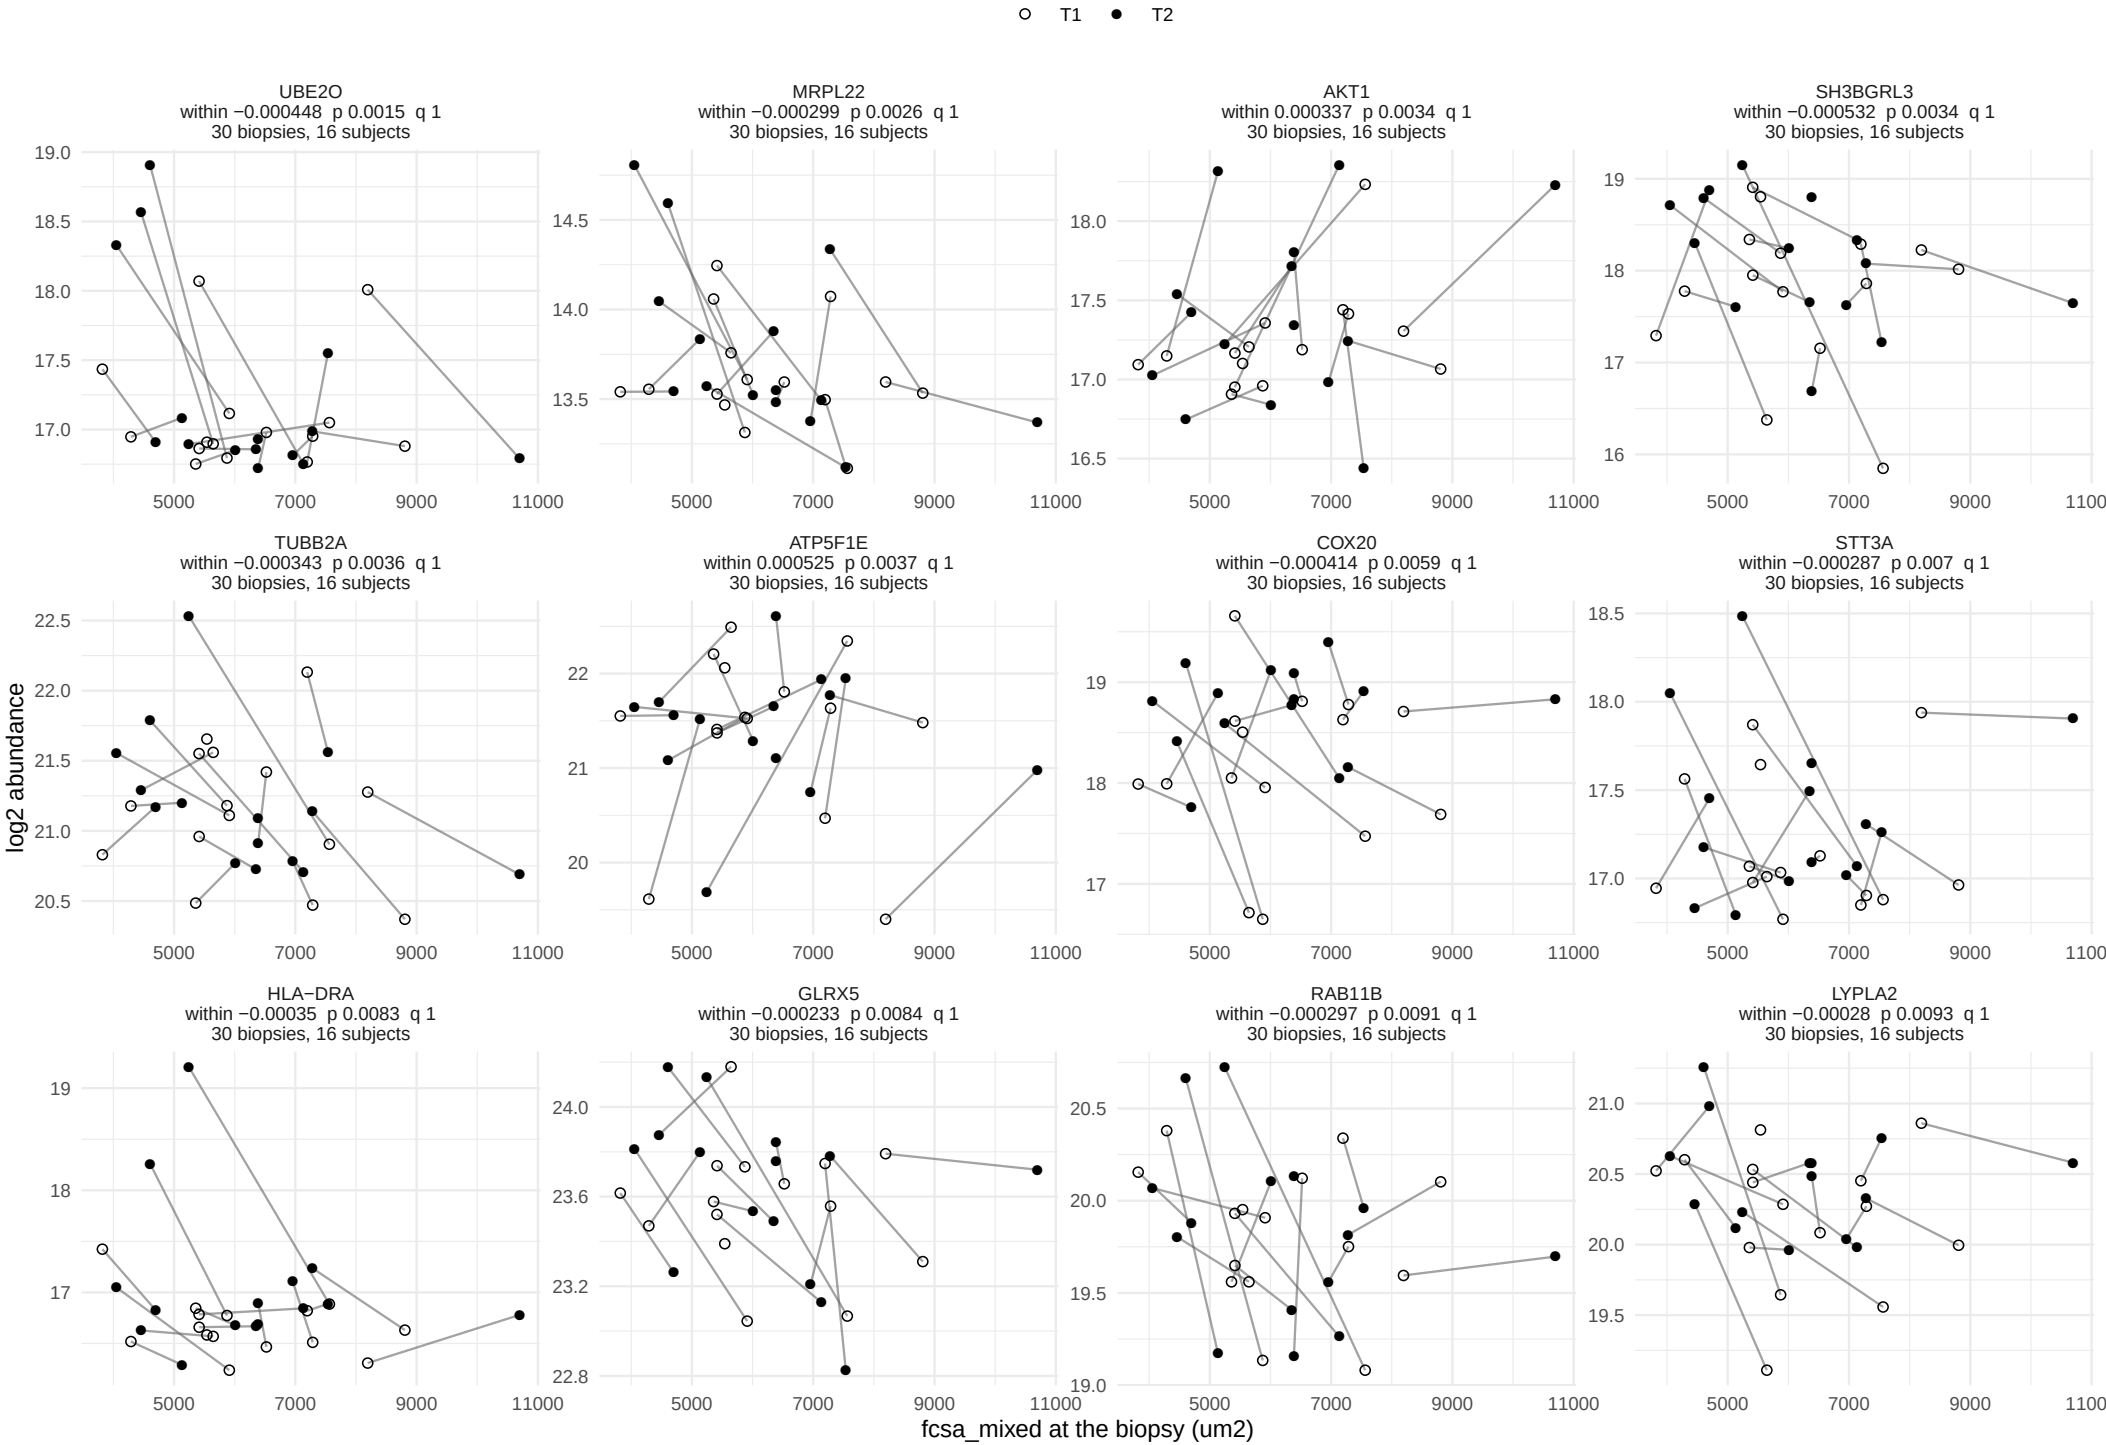

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

fcsa_mixed, within−person term


62 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 2 of 6.

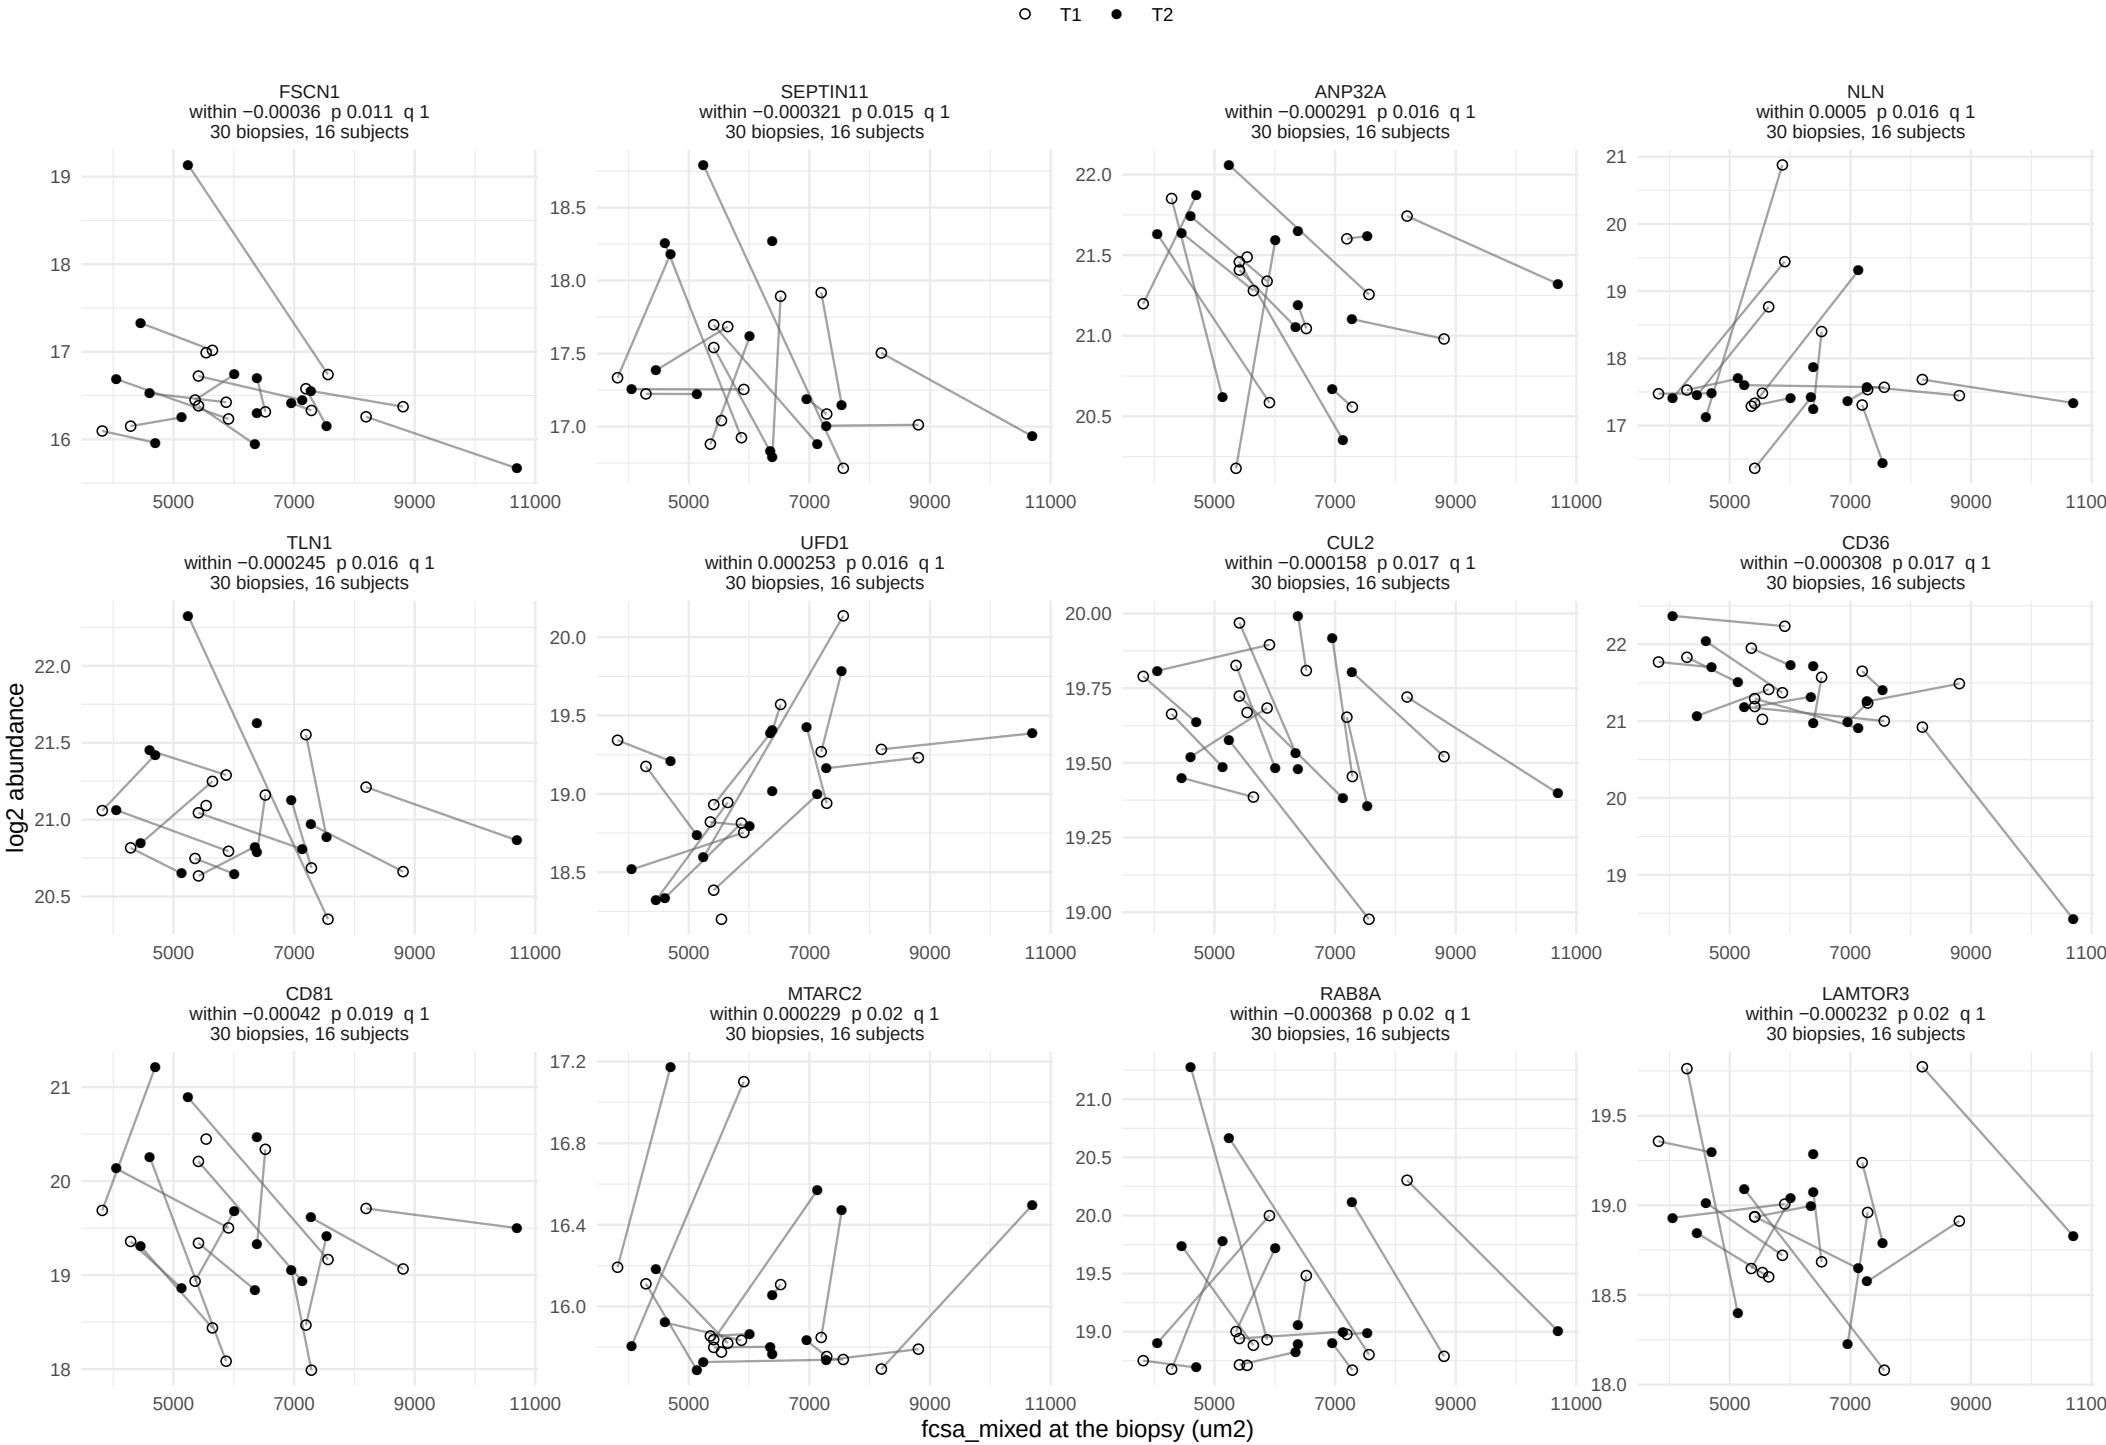

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

fcsa_mixed, within−person term


62 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 3 of 6.

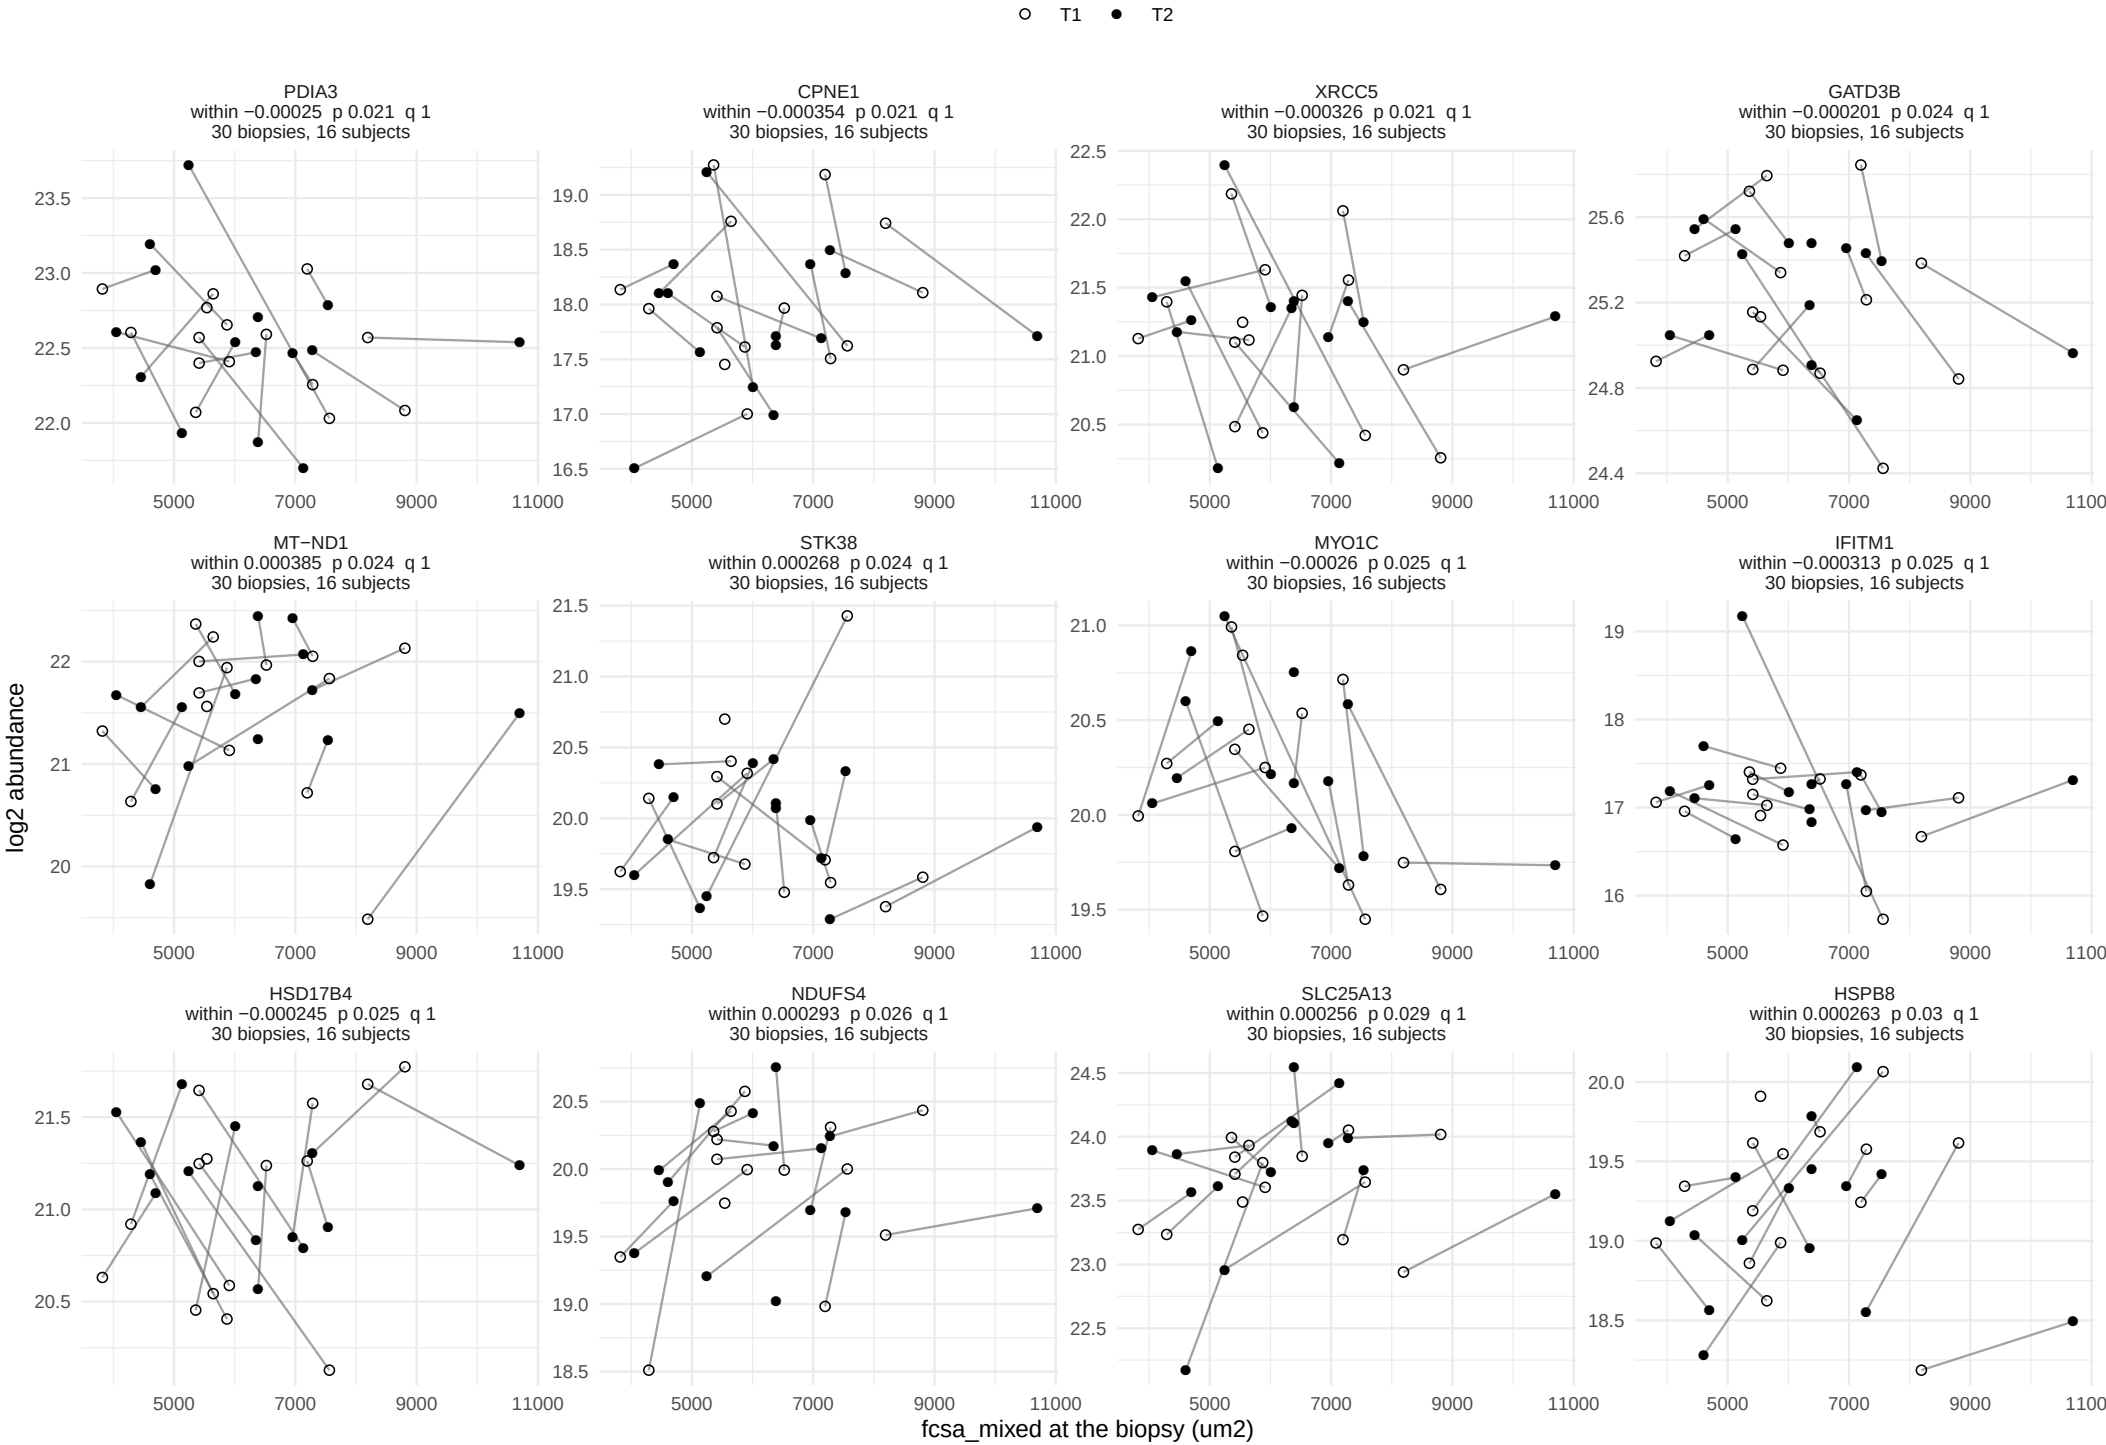

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

fcsa_mixed, within−person term


62 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 4 of 6.

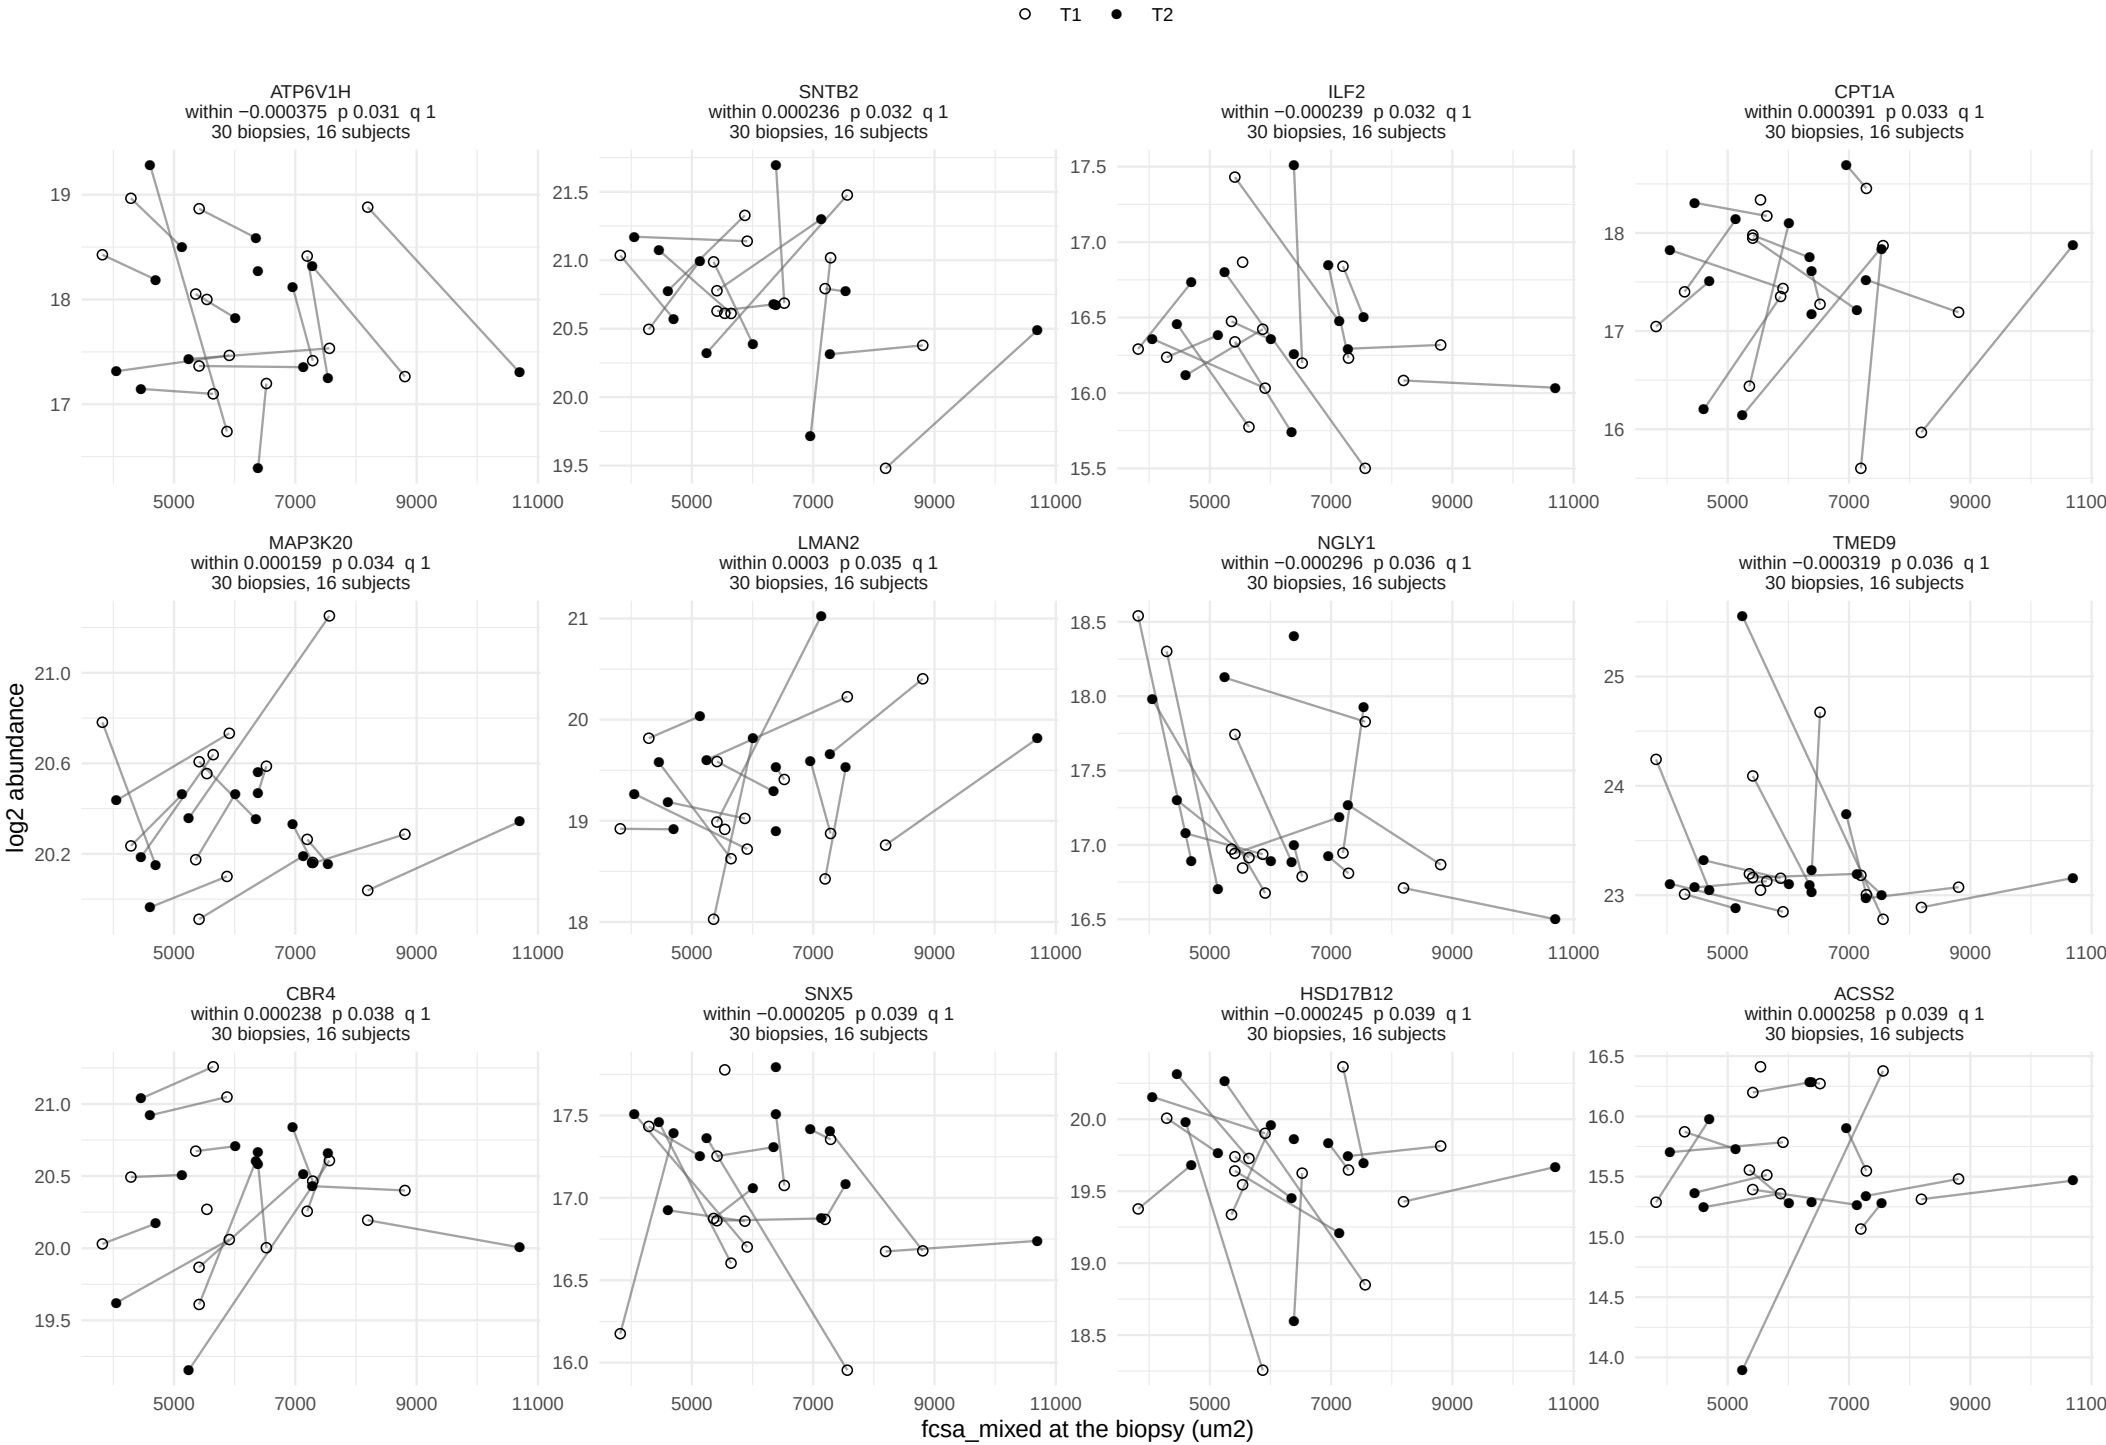

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

fcsa_mixed, within−person term


62 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 5 of 6.

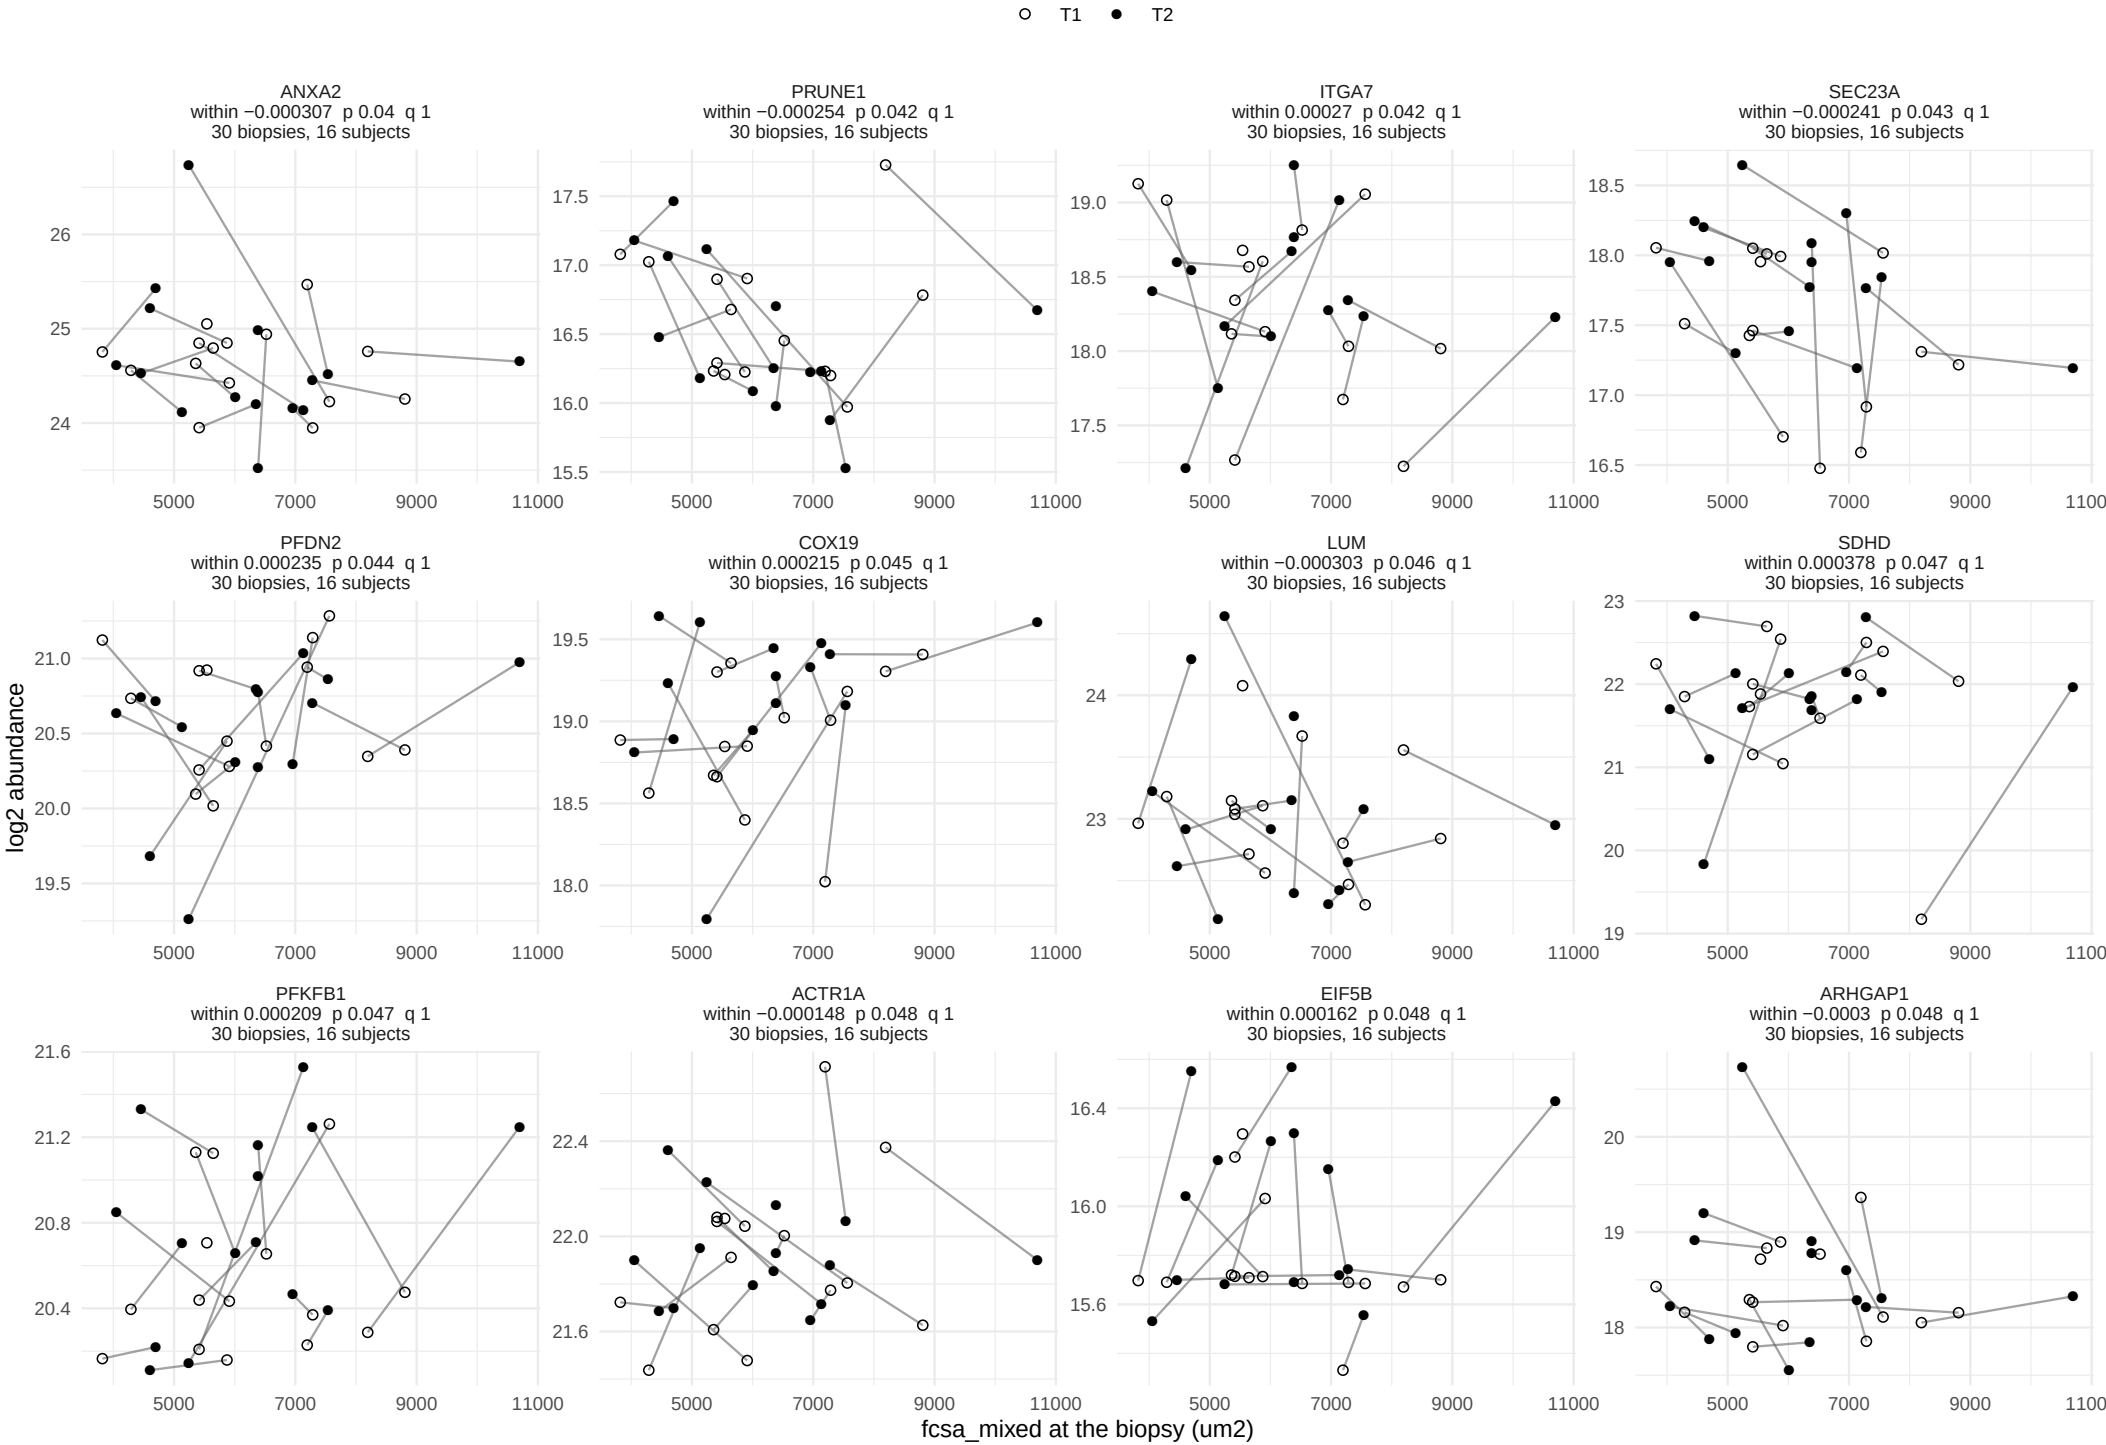

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

fcsa_mixed, within−person term


62 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 6 of 6.

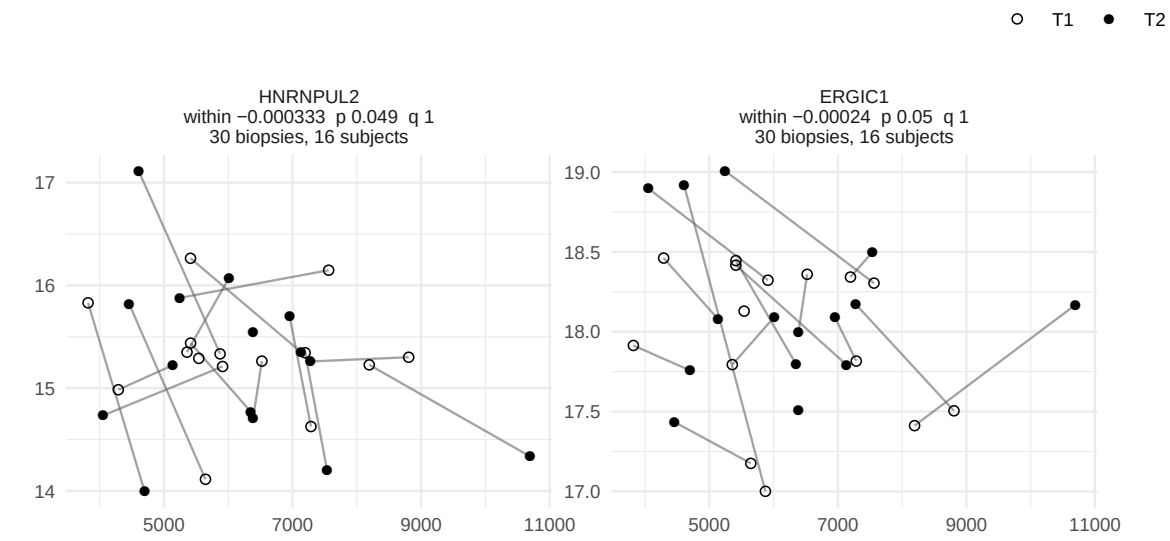

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

fcsa_mixed, between−person term


74 of 1900 proteins at p < 0.05, 1 at BH < 0.05. Page 1 of 7.

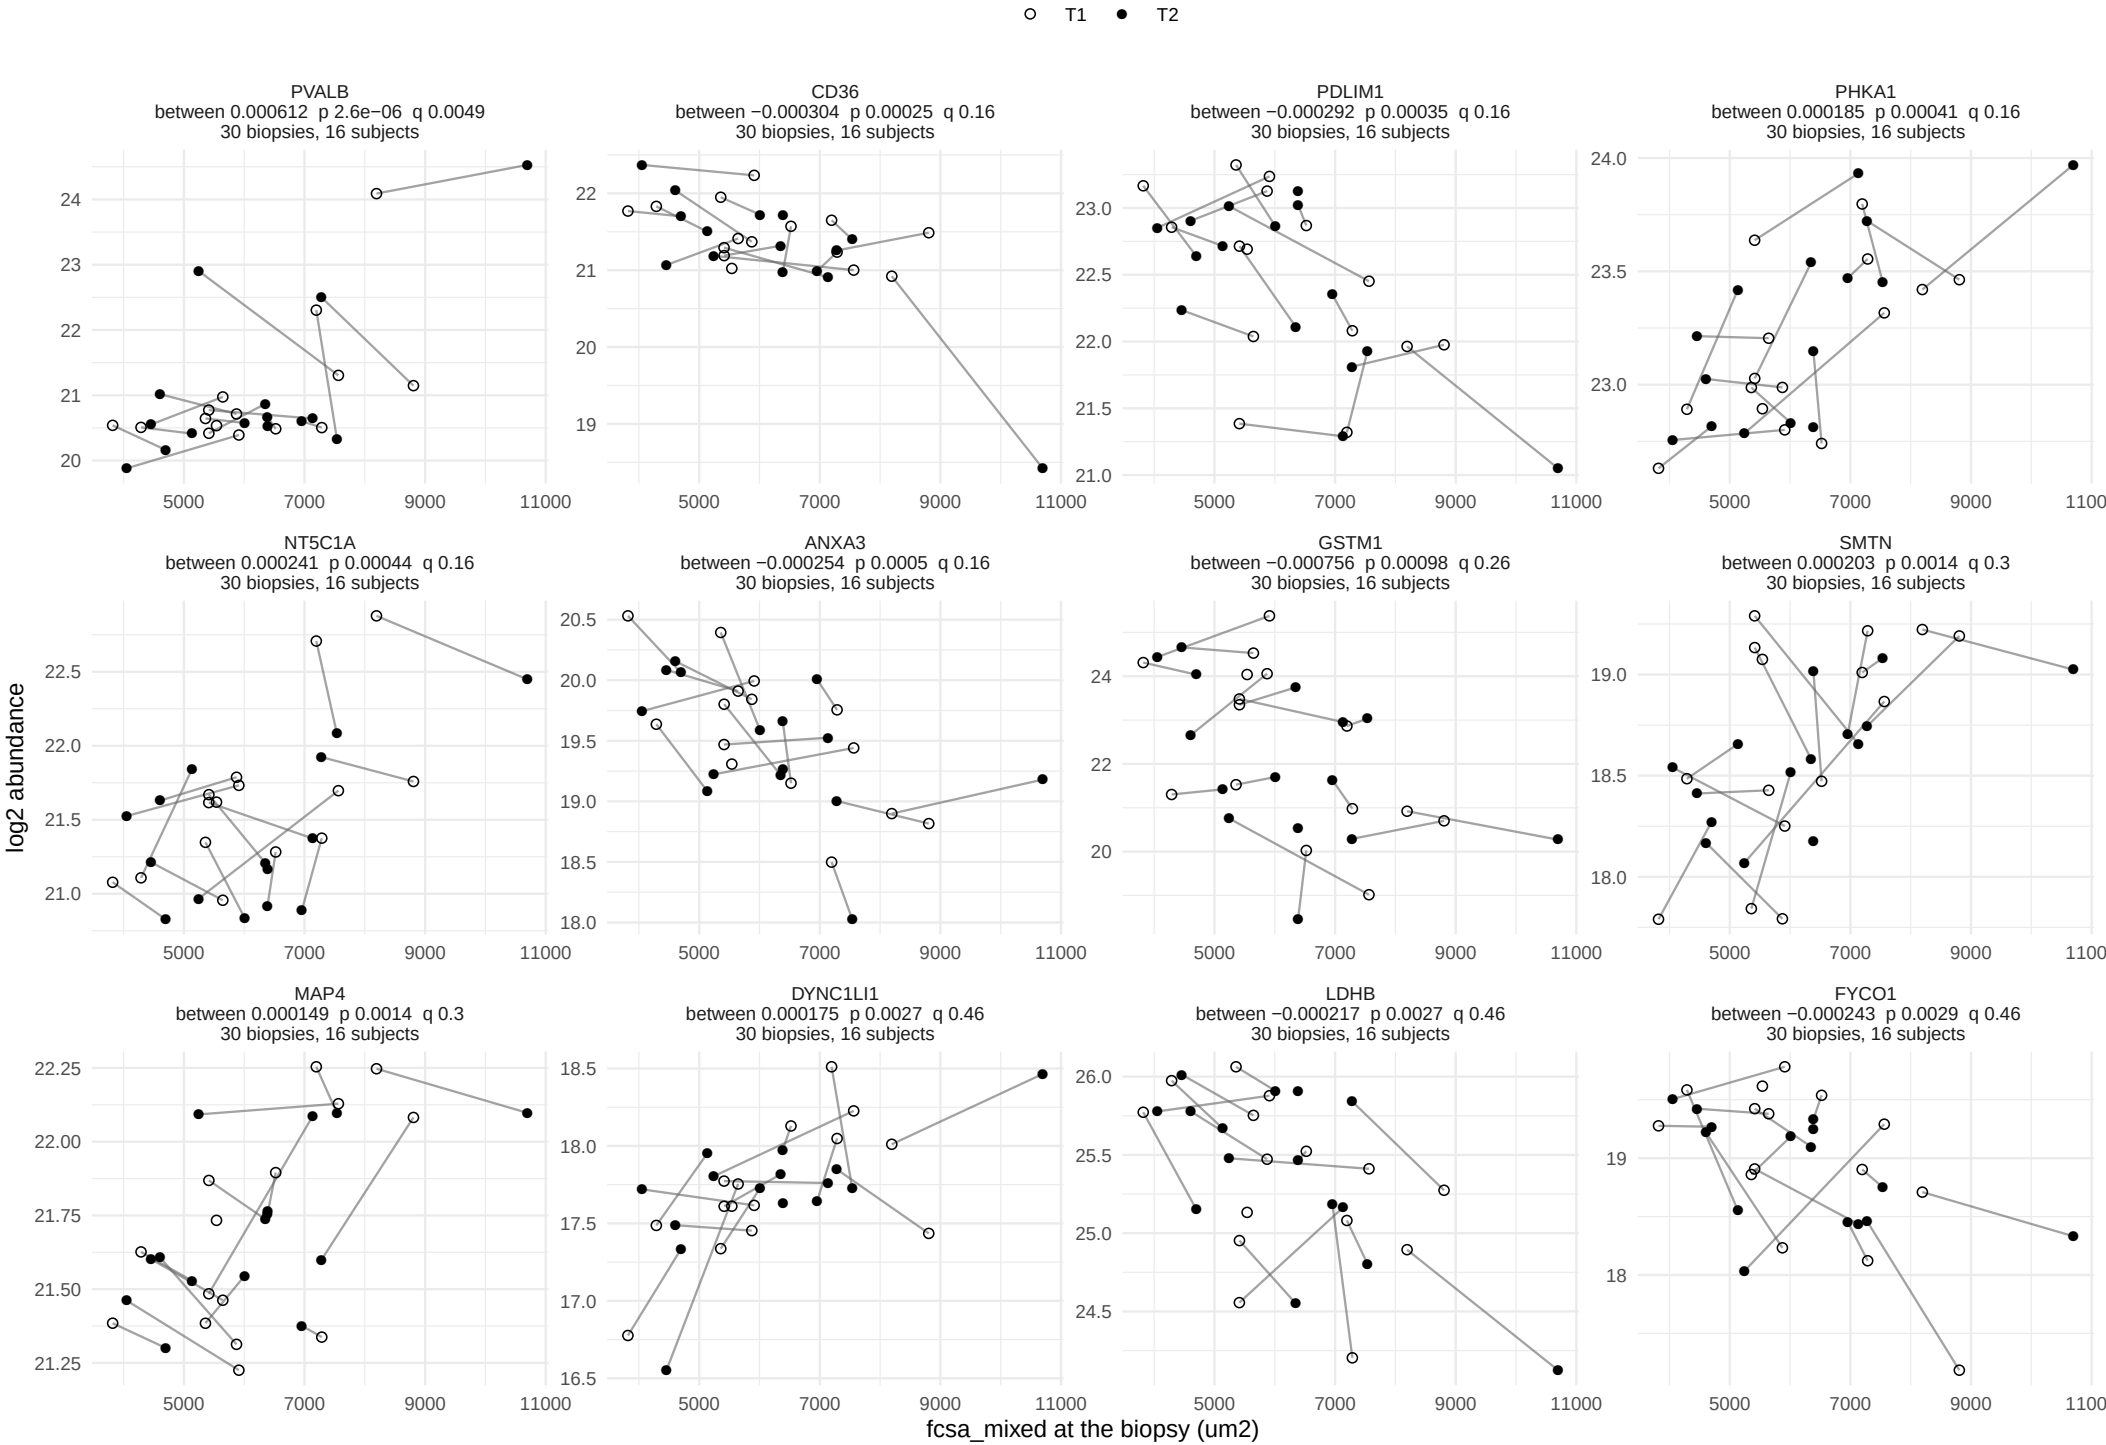

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

fcsa_mixed, between−person term


74 of 1900 proteins at p < 0.05, 1 at BH < 0.05. Page 2 of 7.

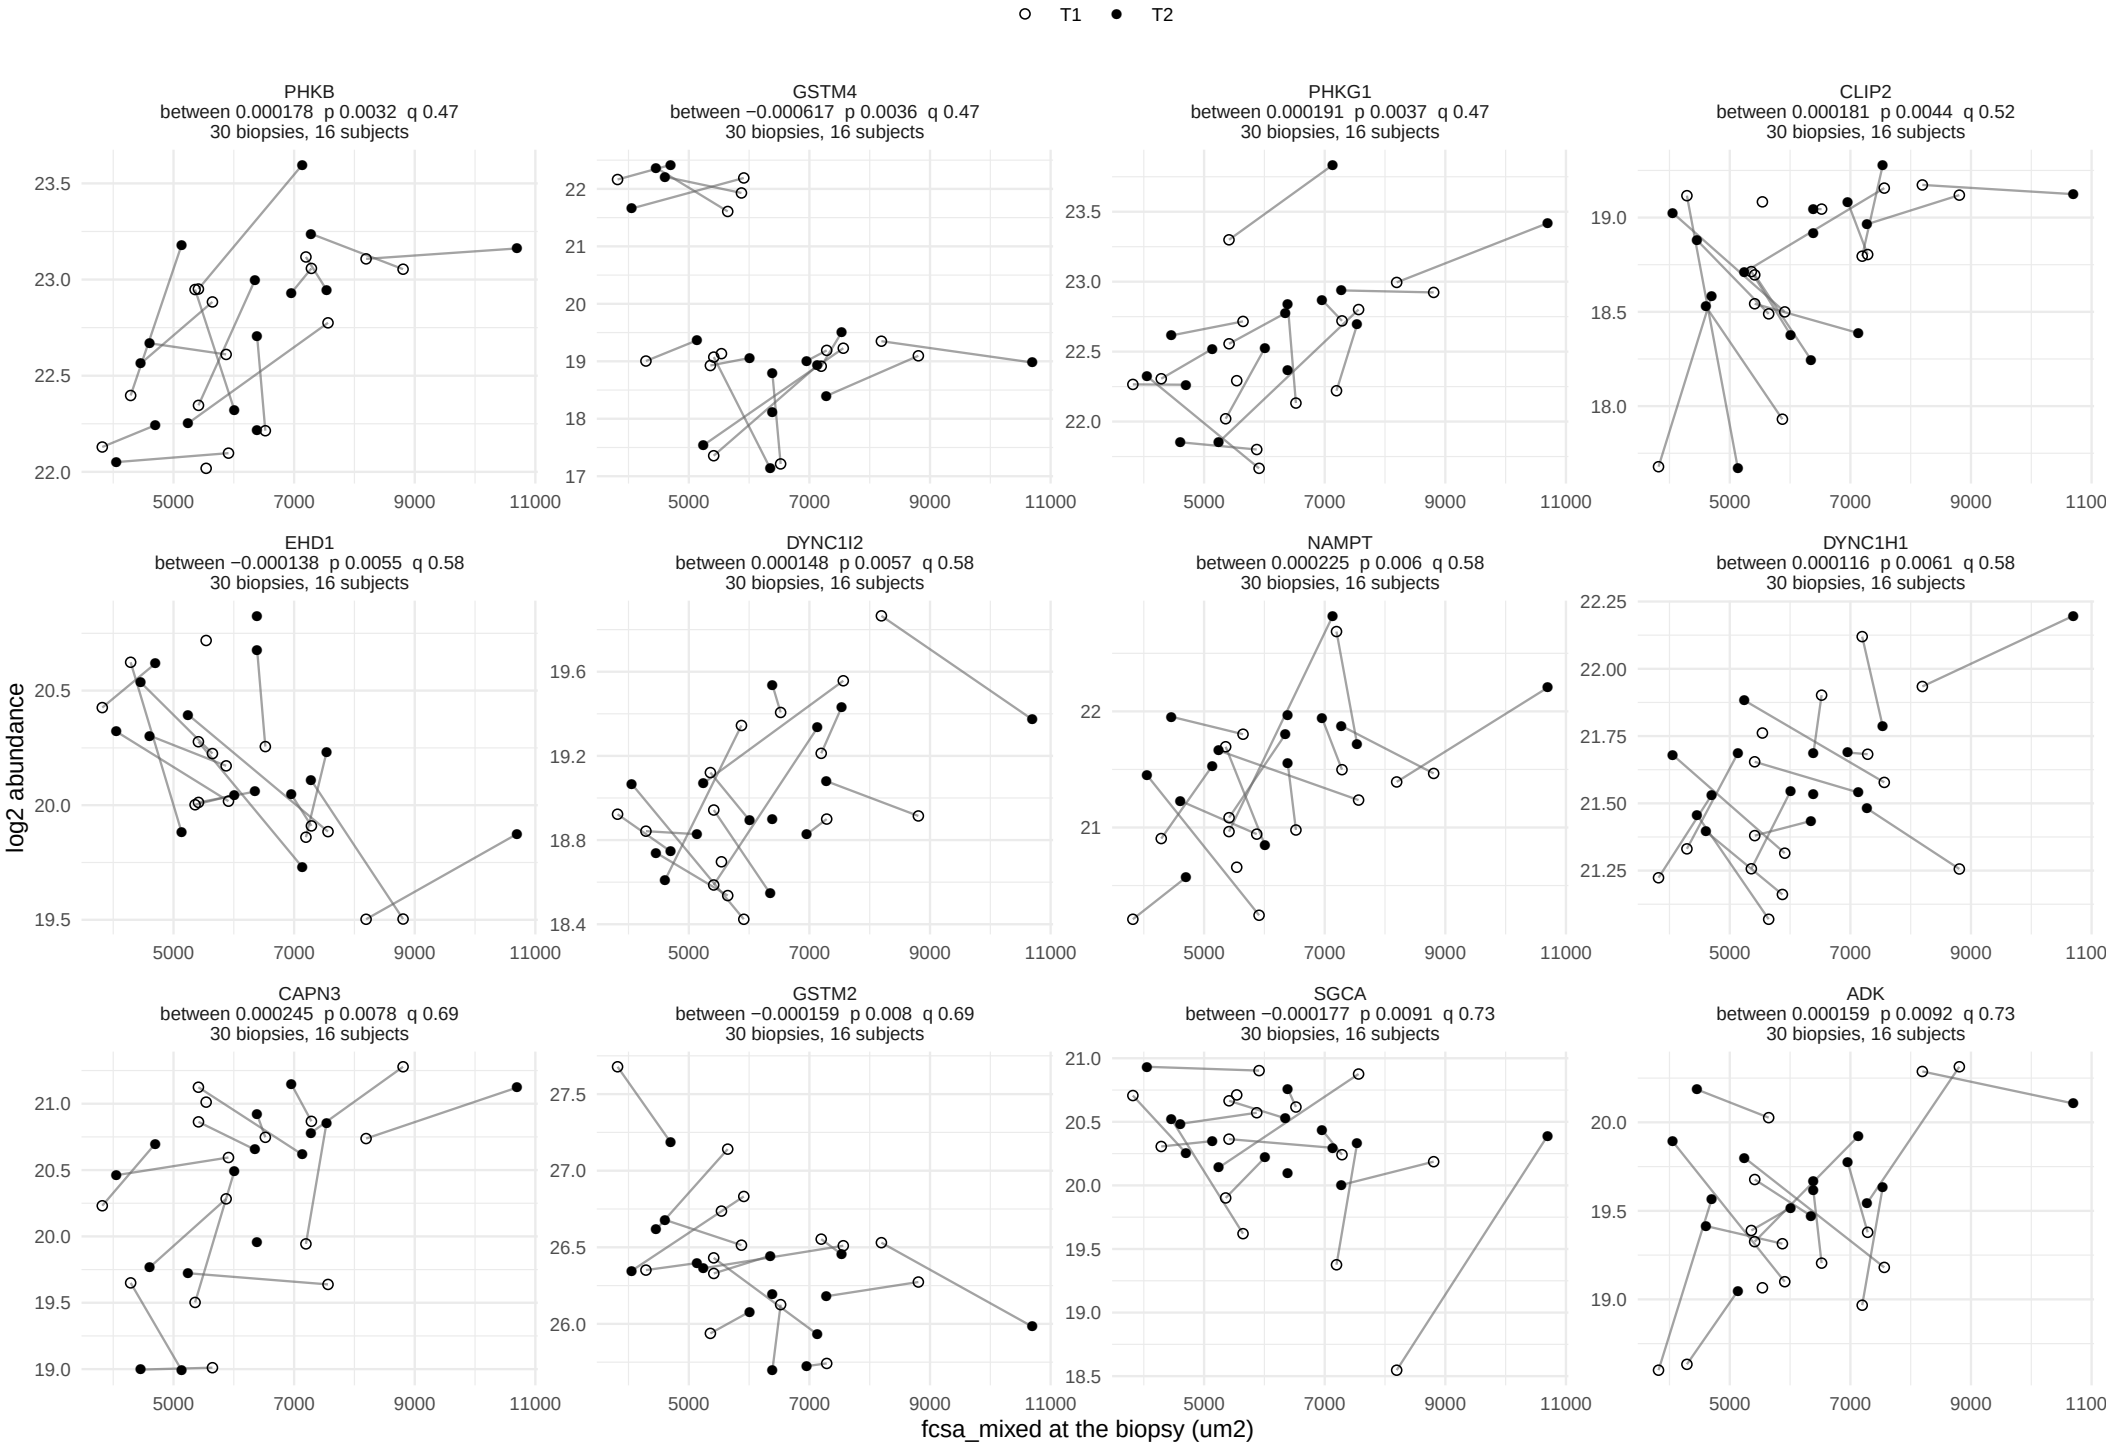

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

fcsa_mixed, between−person term


74 of 1900 proteins at p < 0.05, 1 at BH < 0.05. Page 3 of 7.

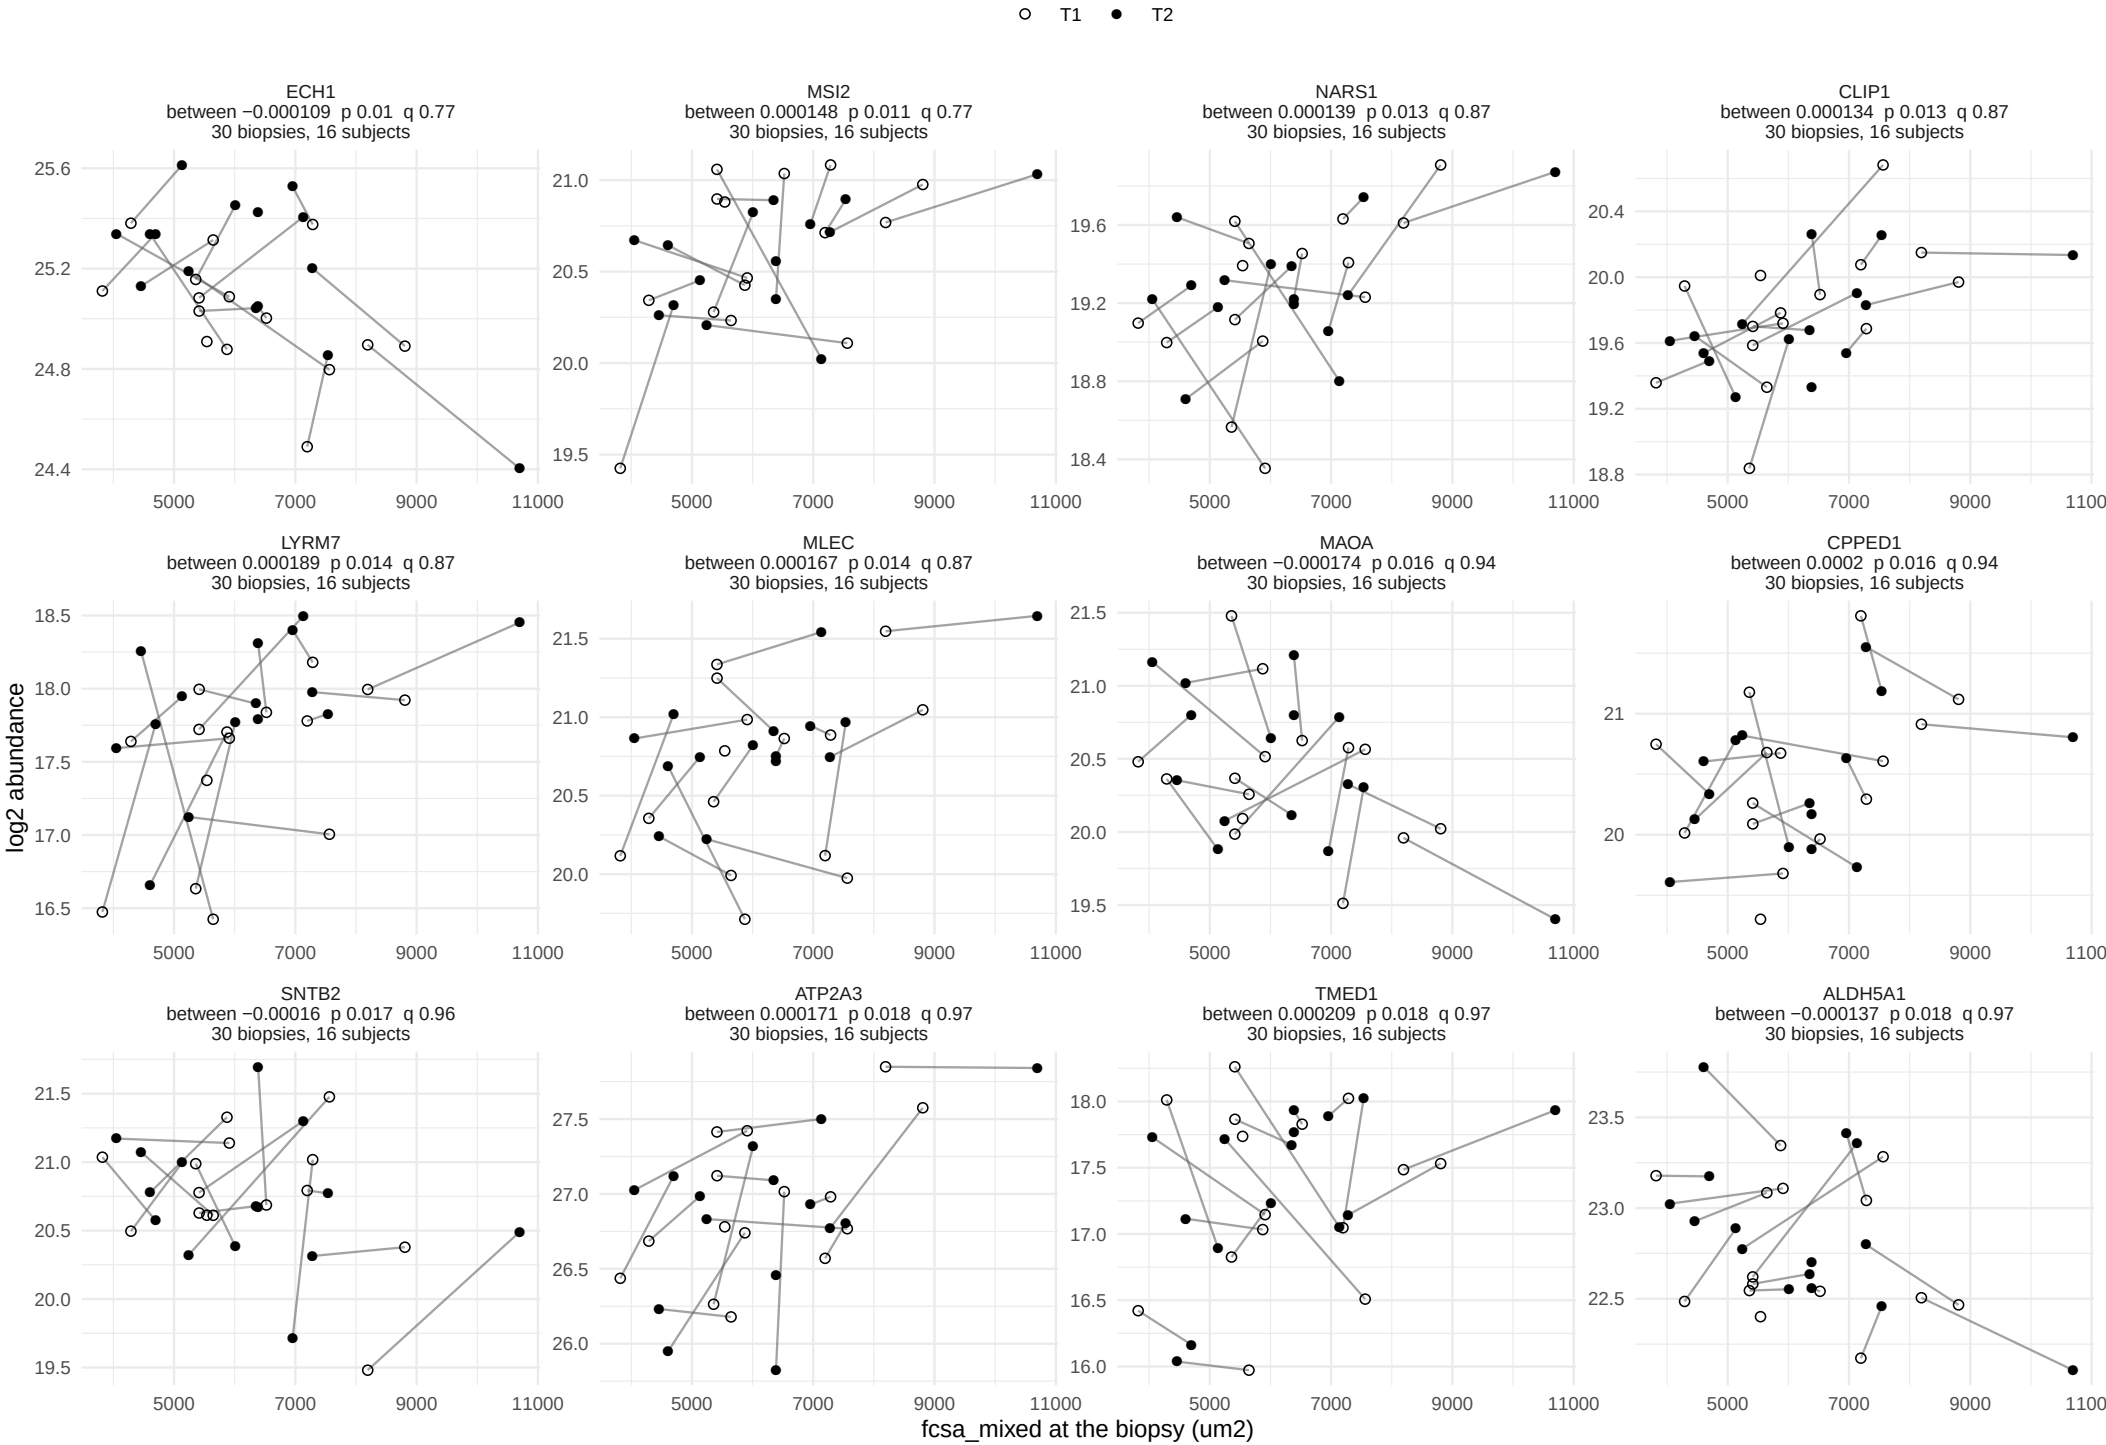

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

fcsa_mixed, between−person term


74 of 1900 proteins at p < 0.05, 1 at BH < 0.05. Page 4 of 7.

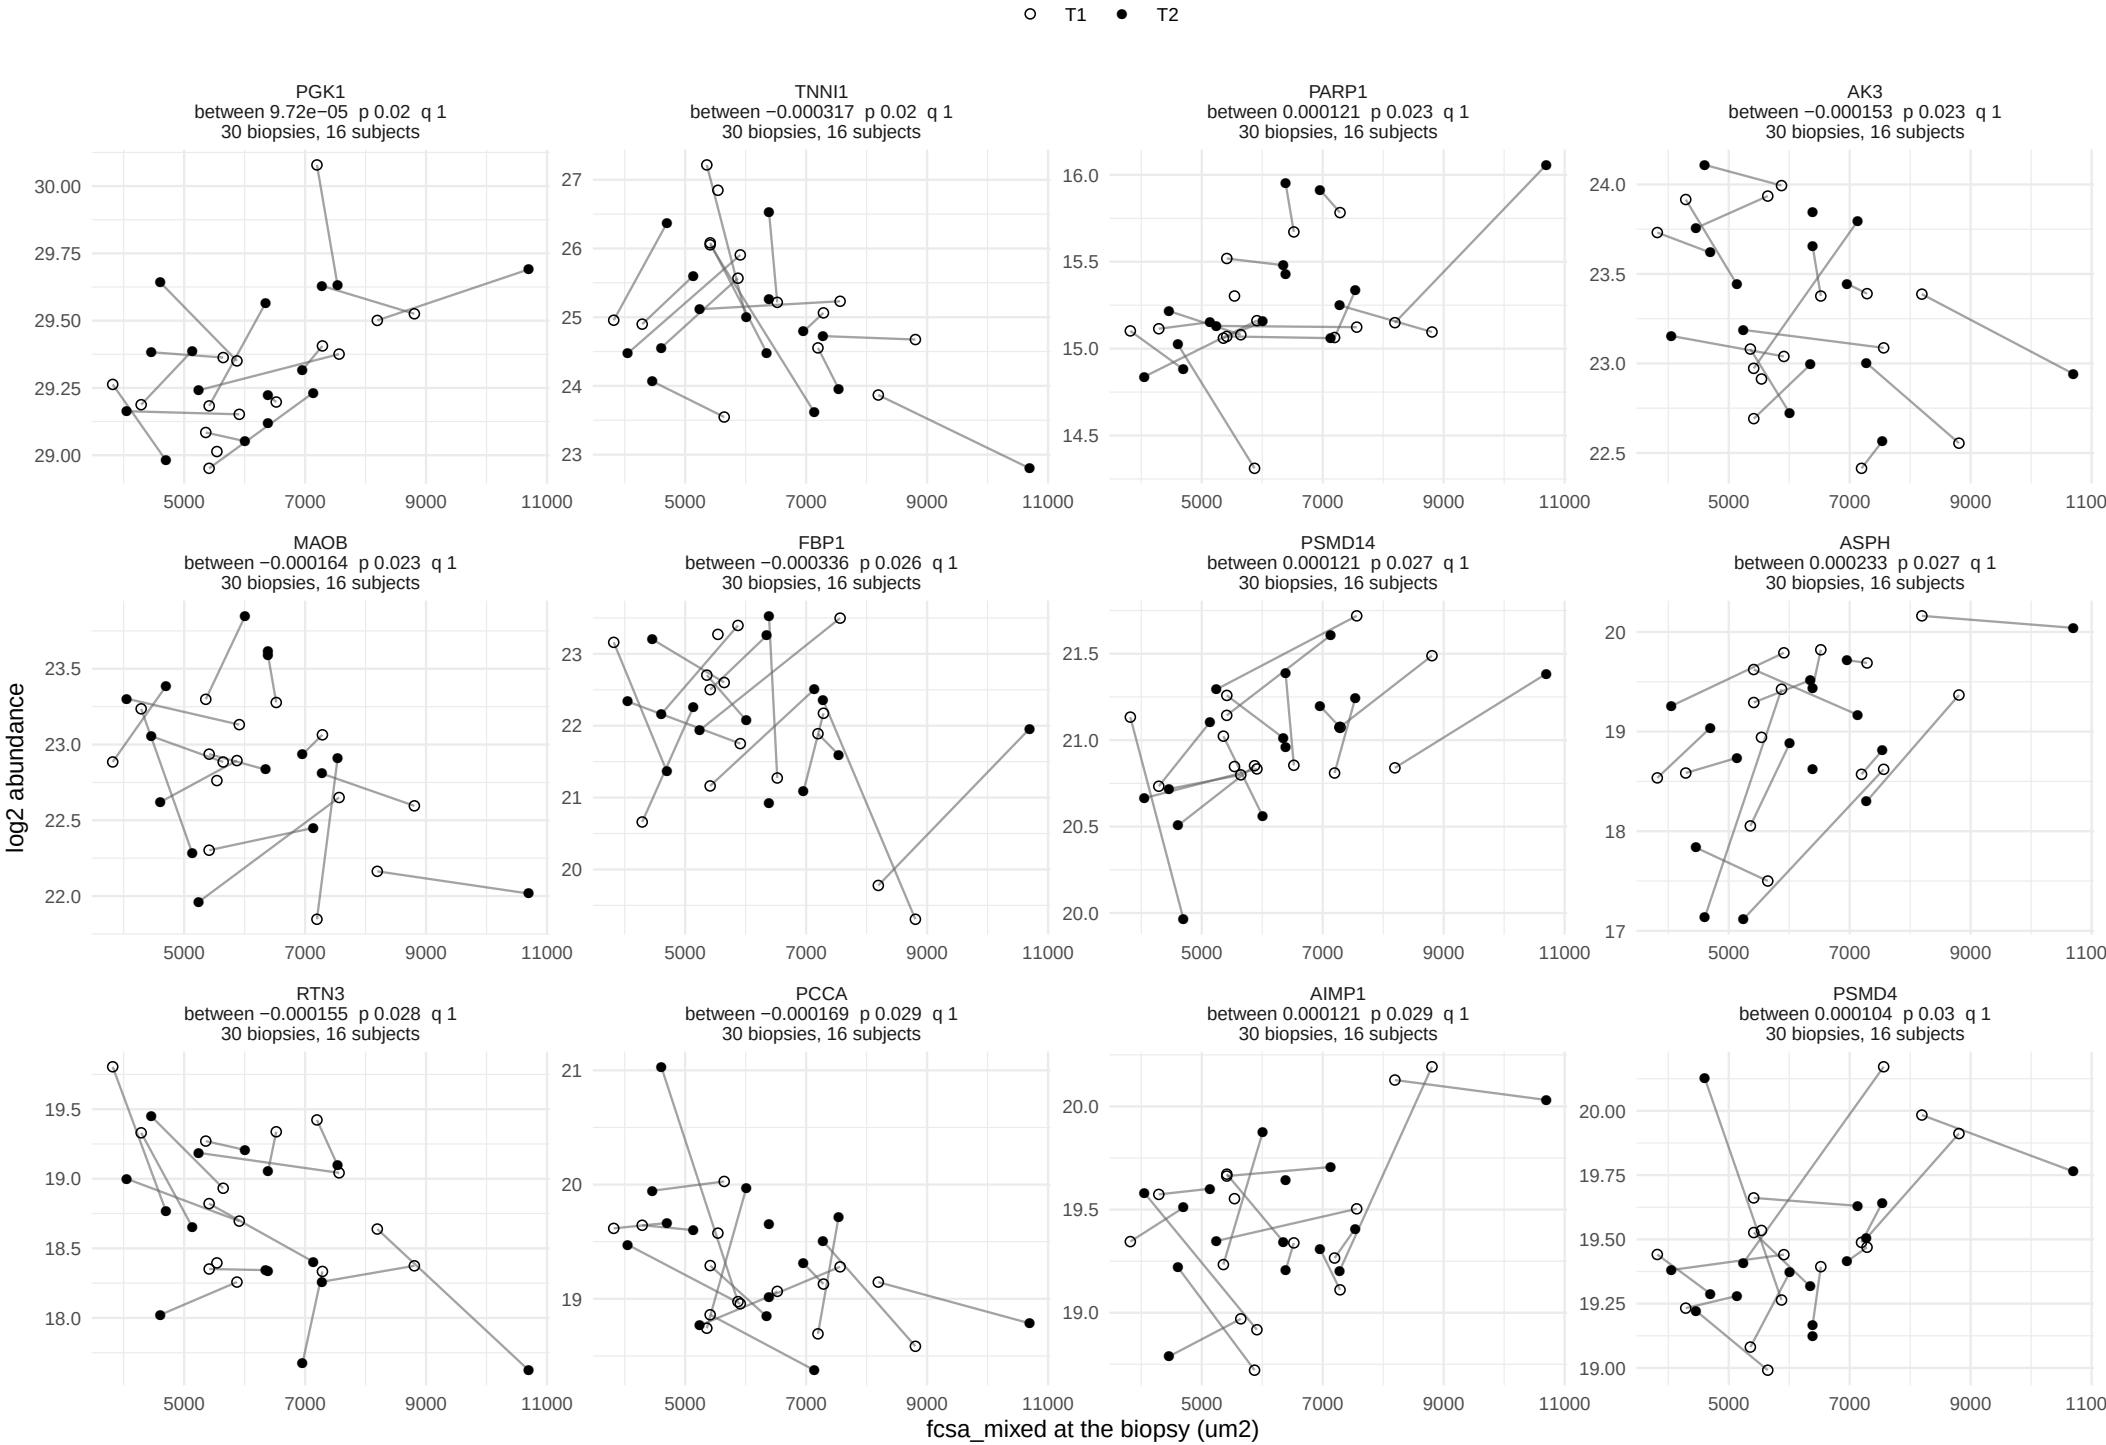

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

fcsa_mixed, between−person term


74 of 1900 proteins at p < 0.05, 1 at BH < 0.05. Page 5 of 7.

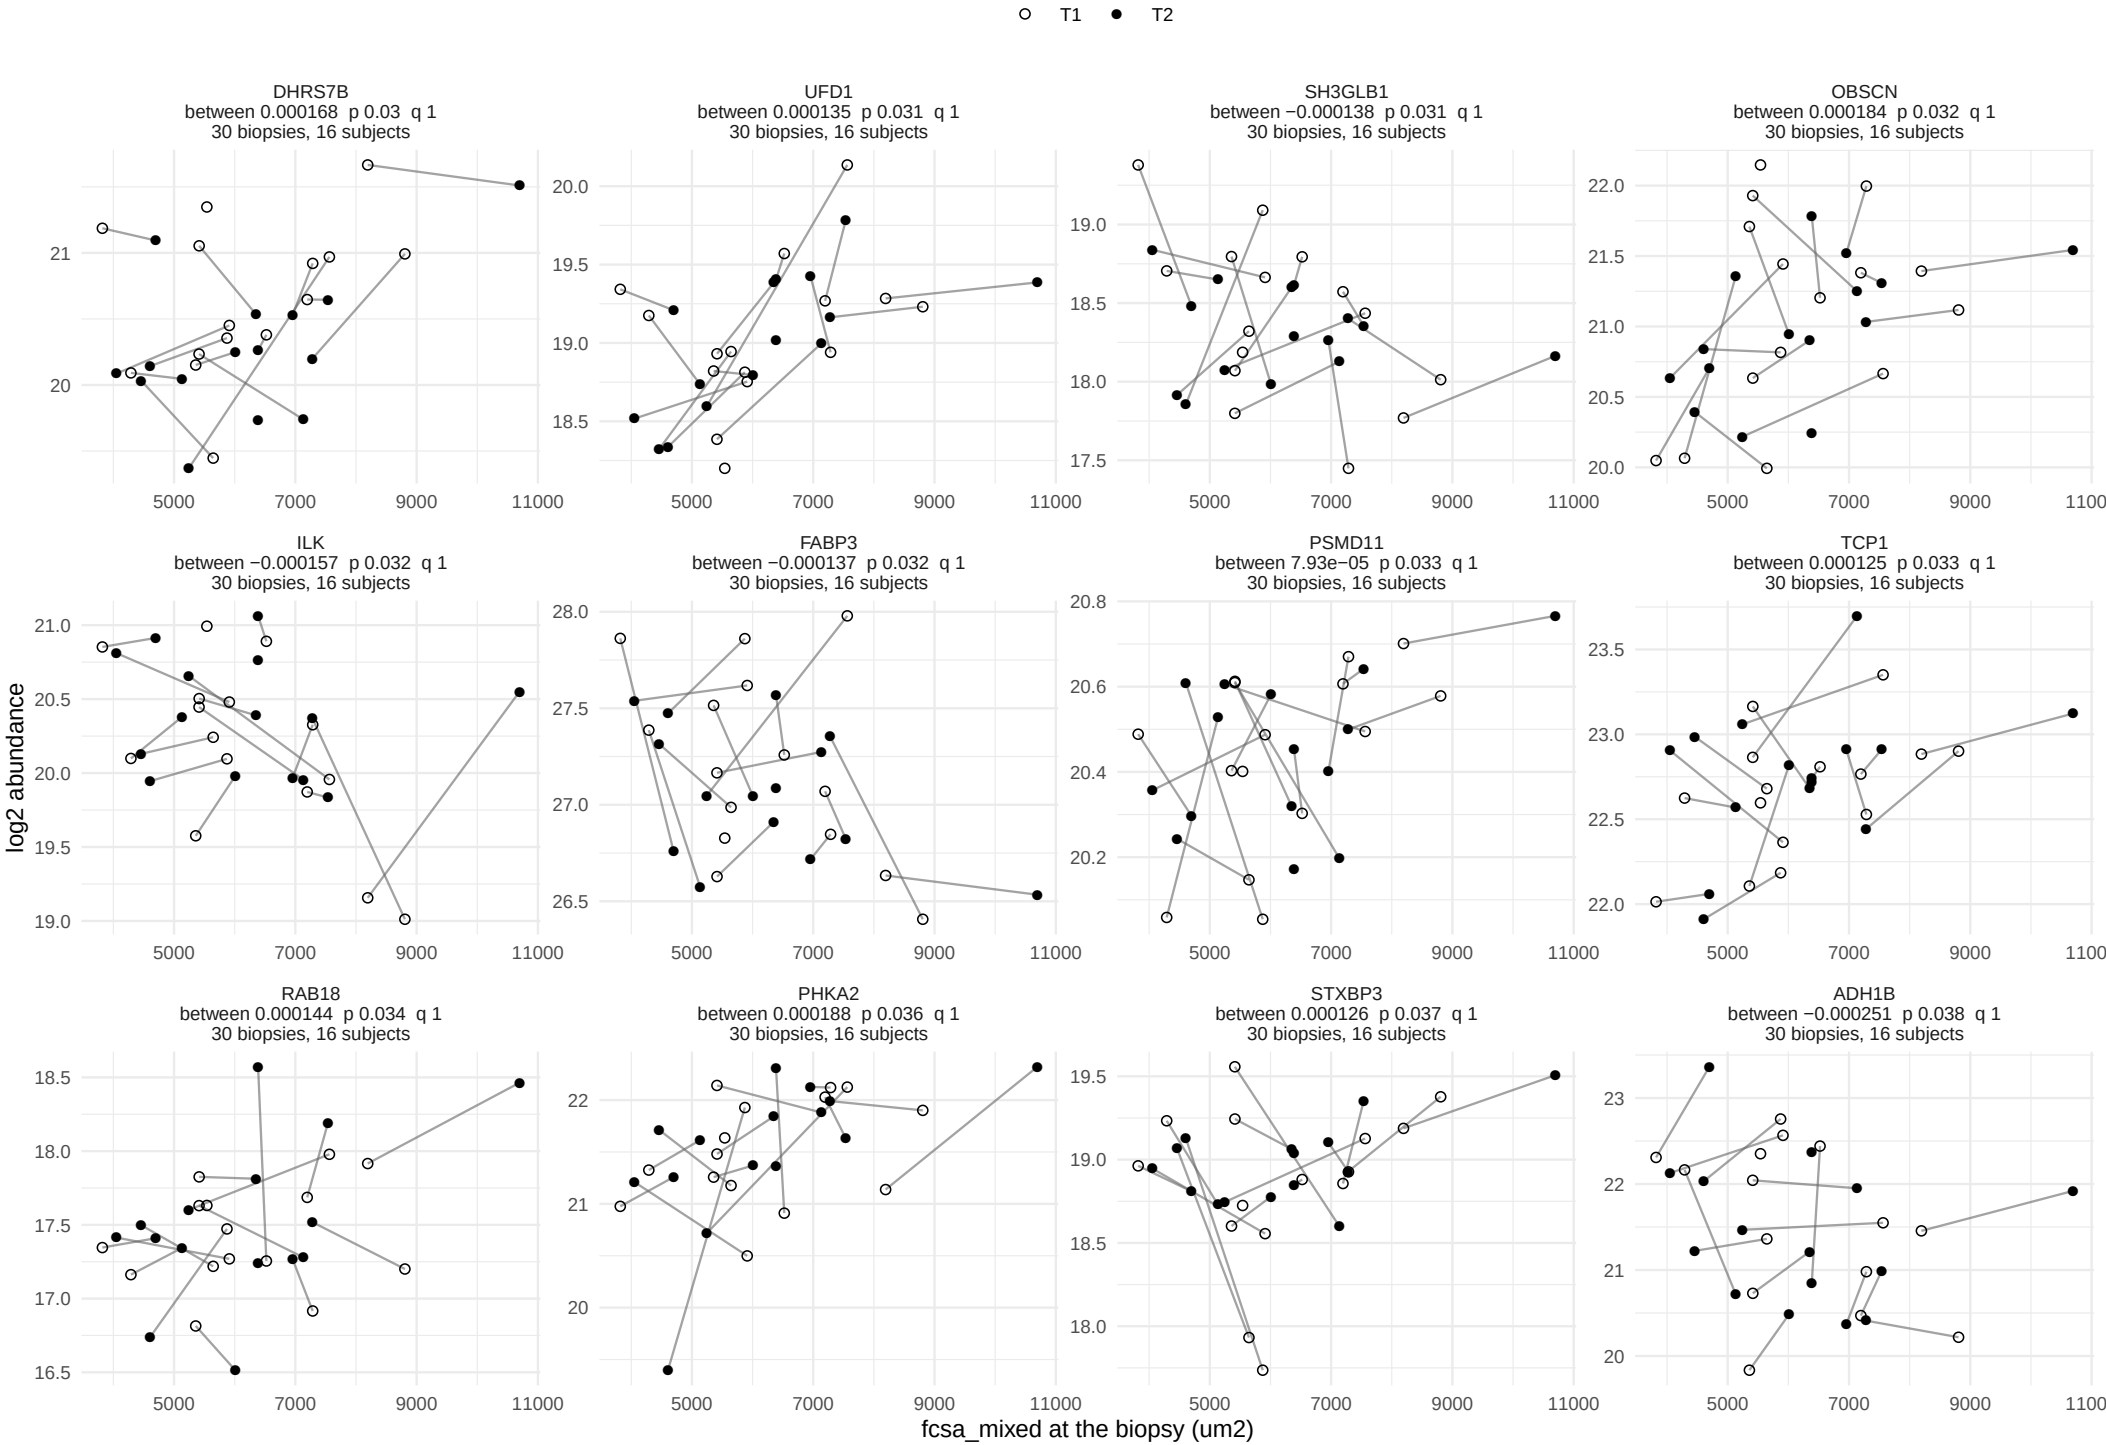

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

fcsa_mixed, between−person term


74 of 1900 proteins at p < 0.05, 1 at BH < 0.05. Page 6 of 7.

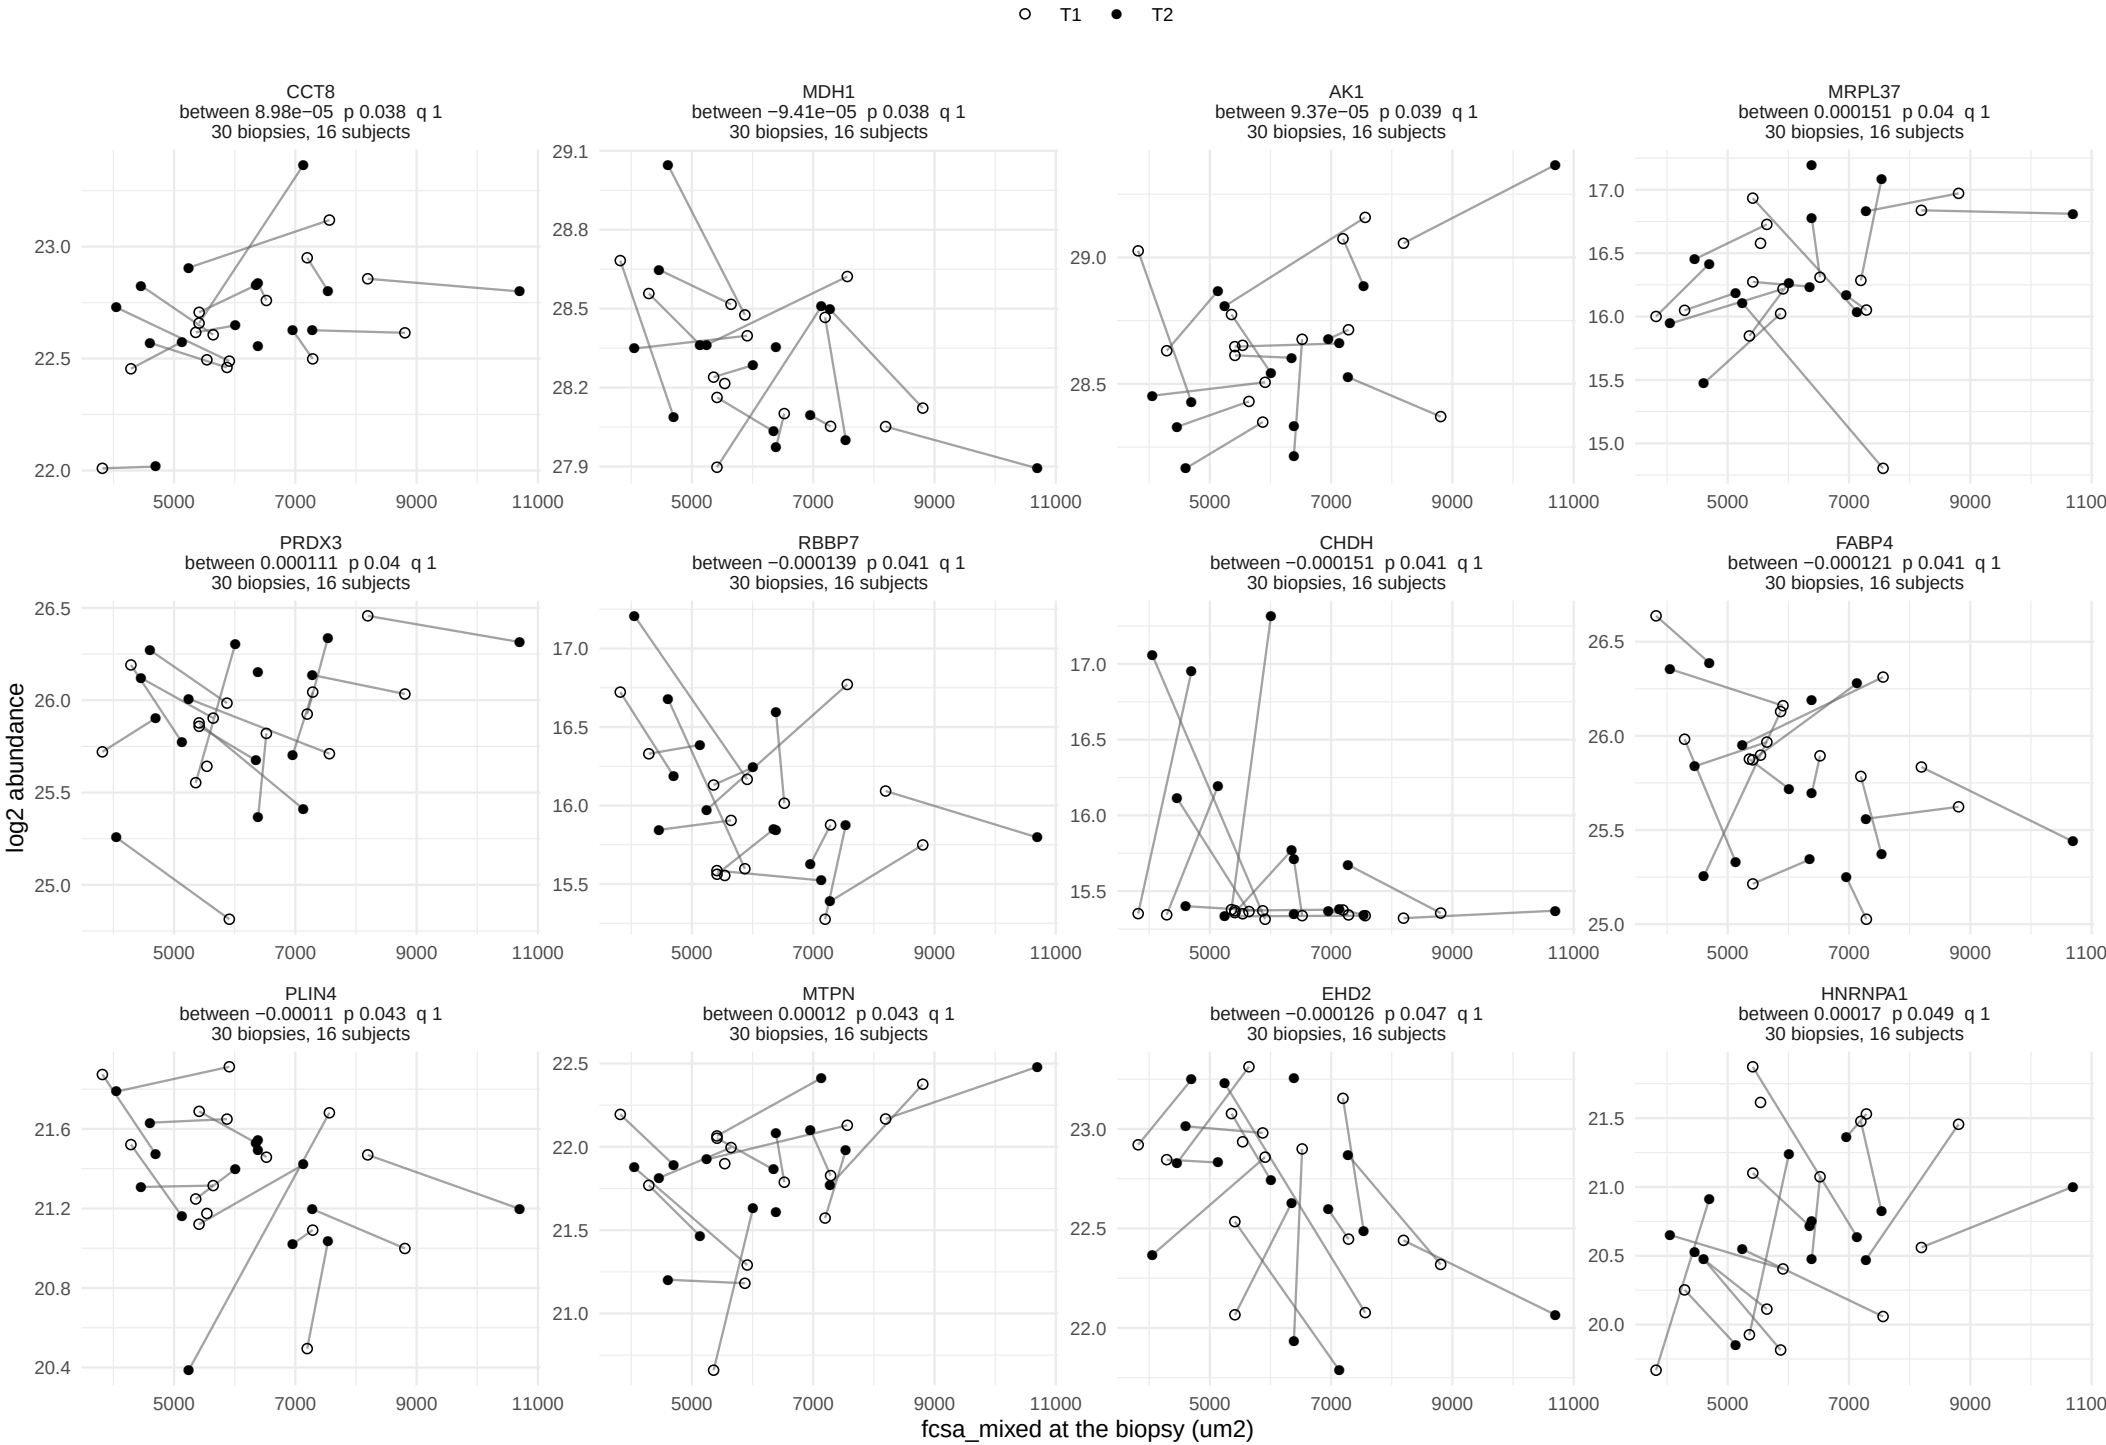

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

fcsa_mixed, between−person term


74 of 1900 proteins at p < 0.05, 1 at BH < 0.05. Page 7 of 7.

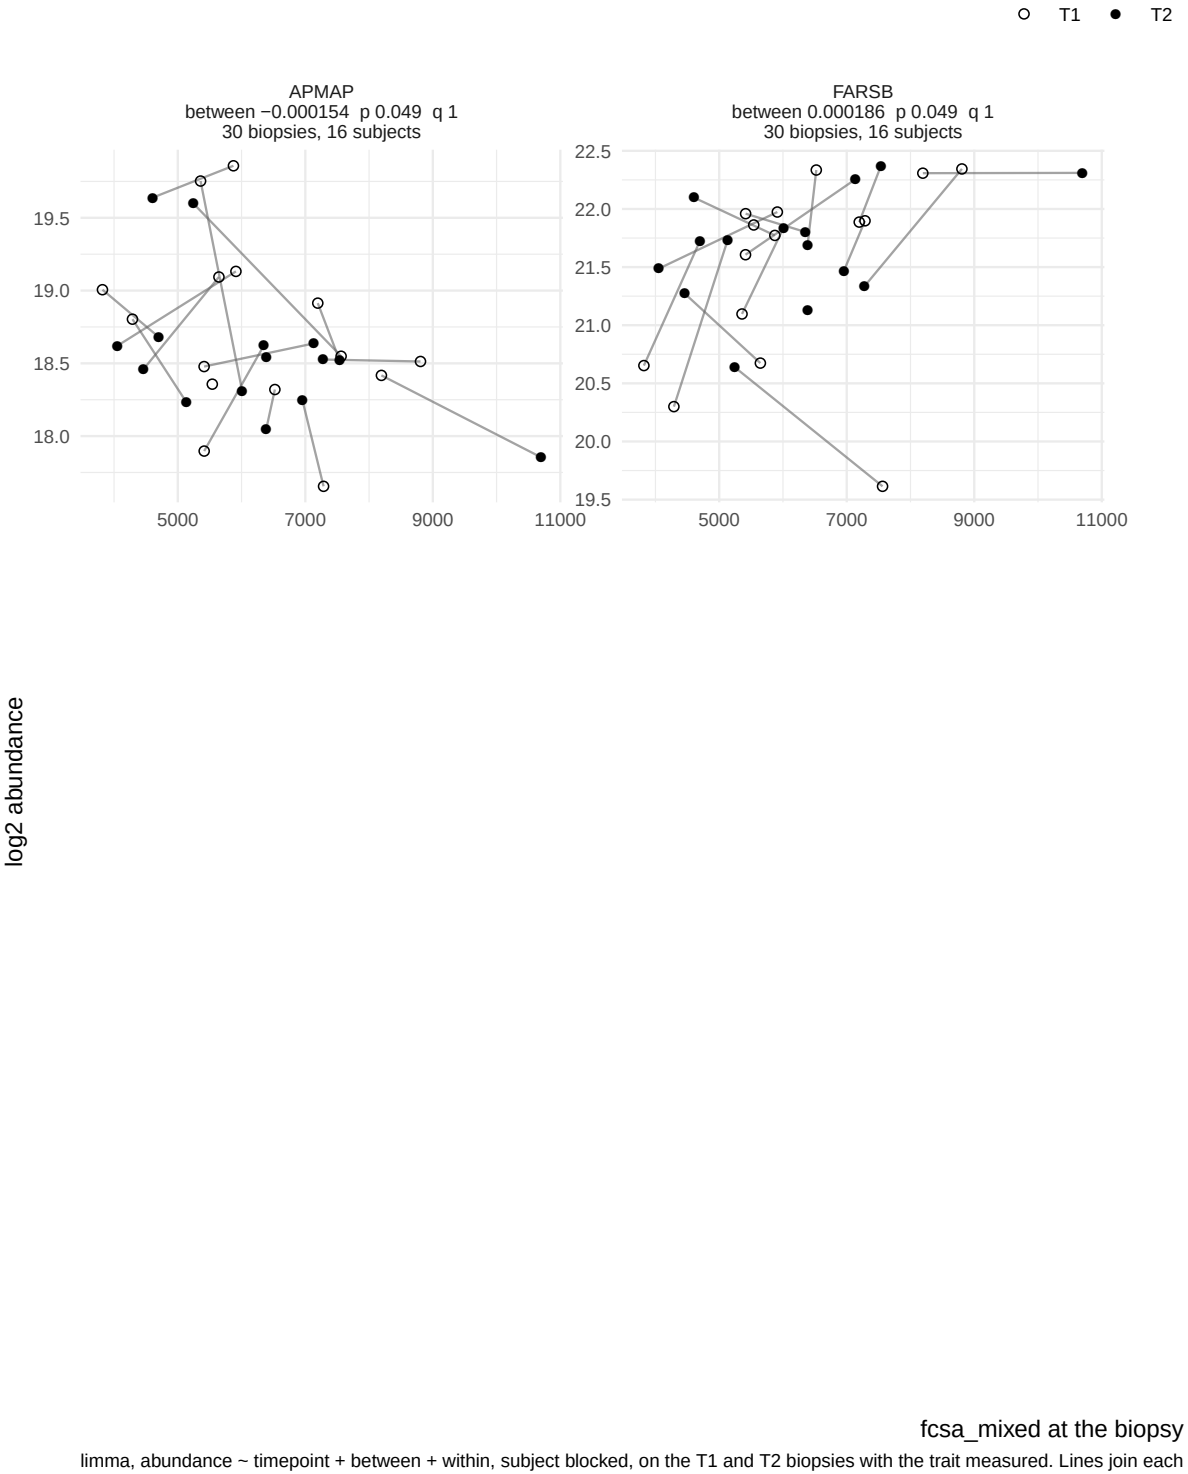

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

fcsa_type1, within−person term


68 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 1 of 6.

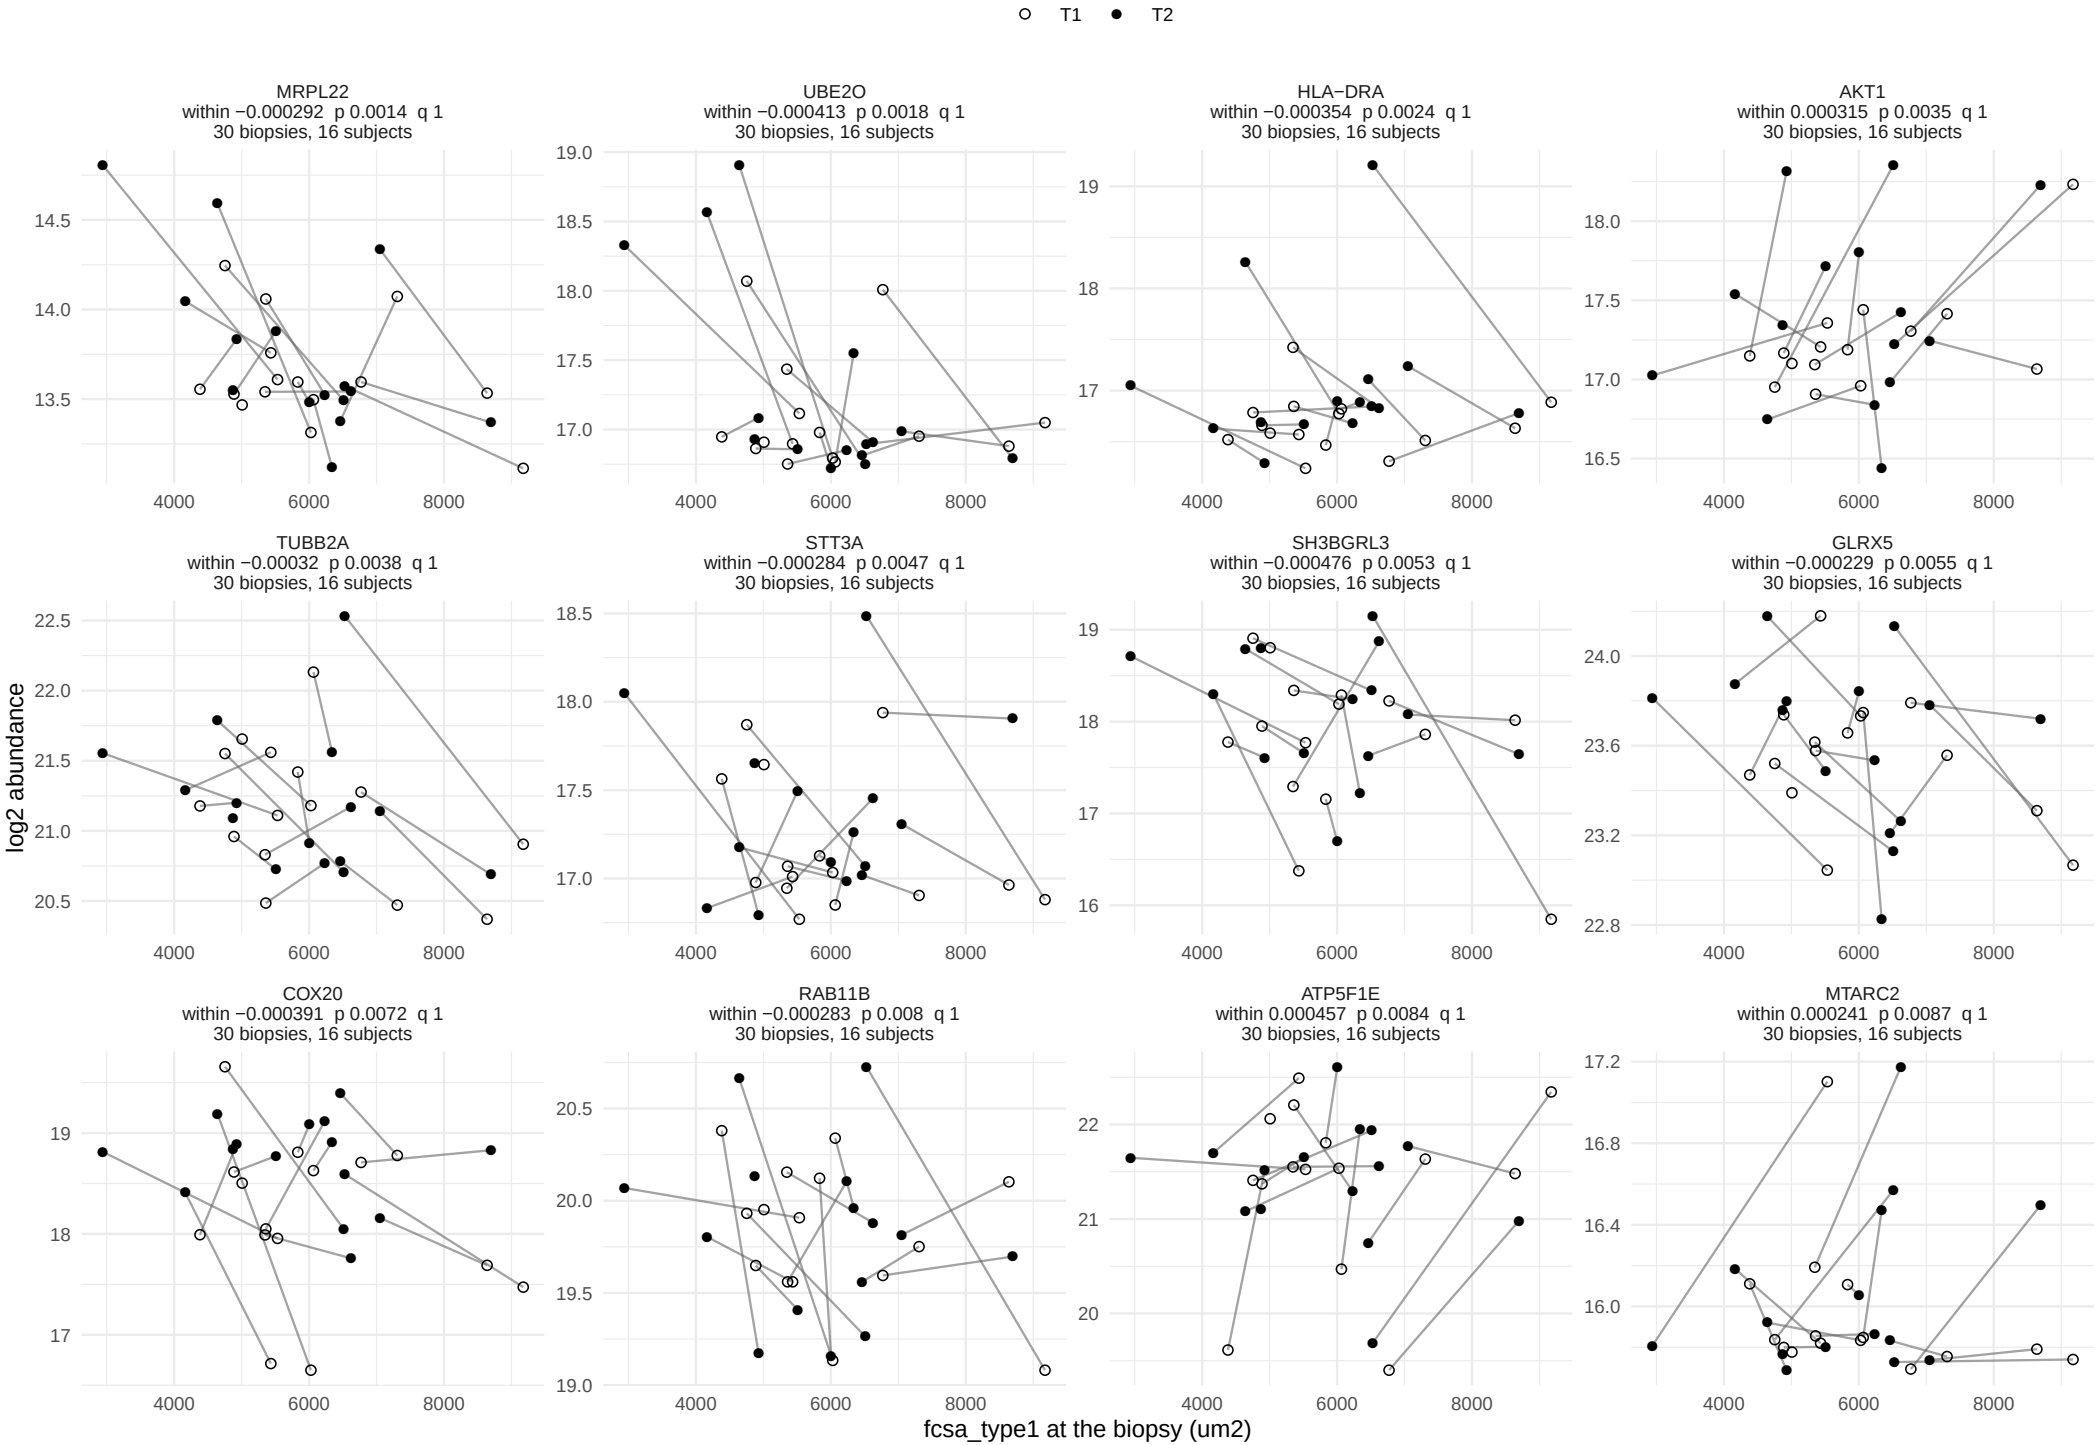

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

fcsa_type1, within−person term


68 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 2 of 6.

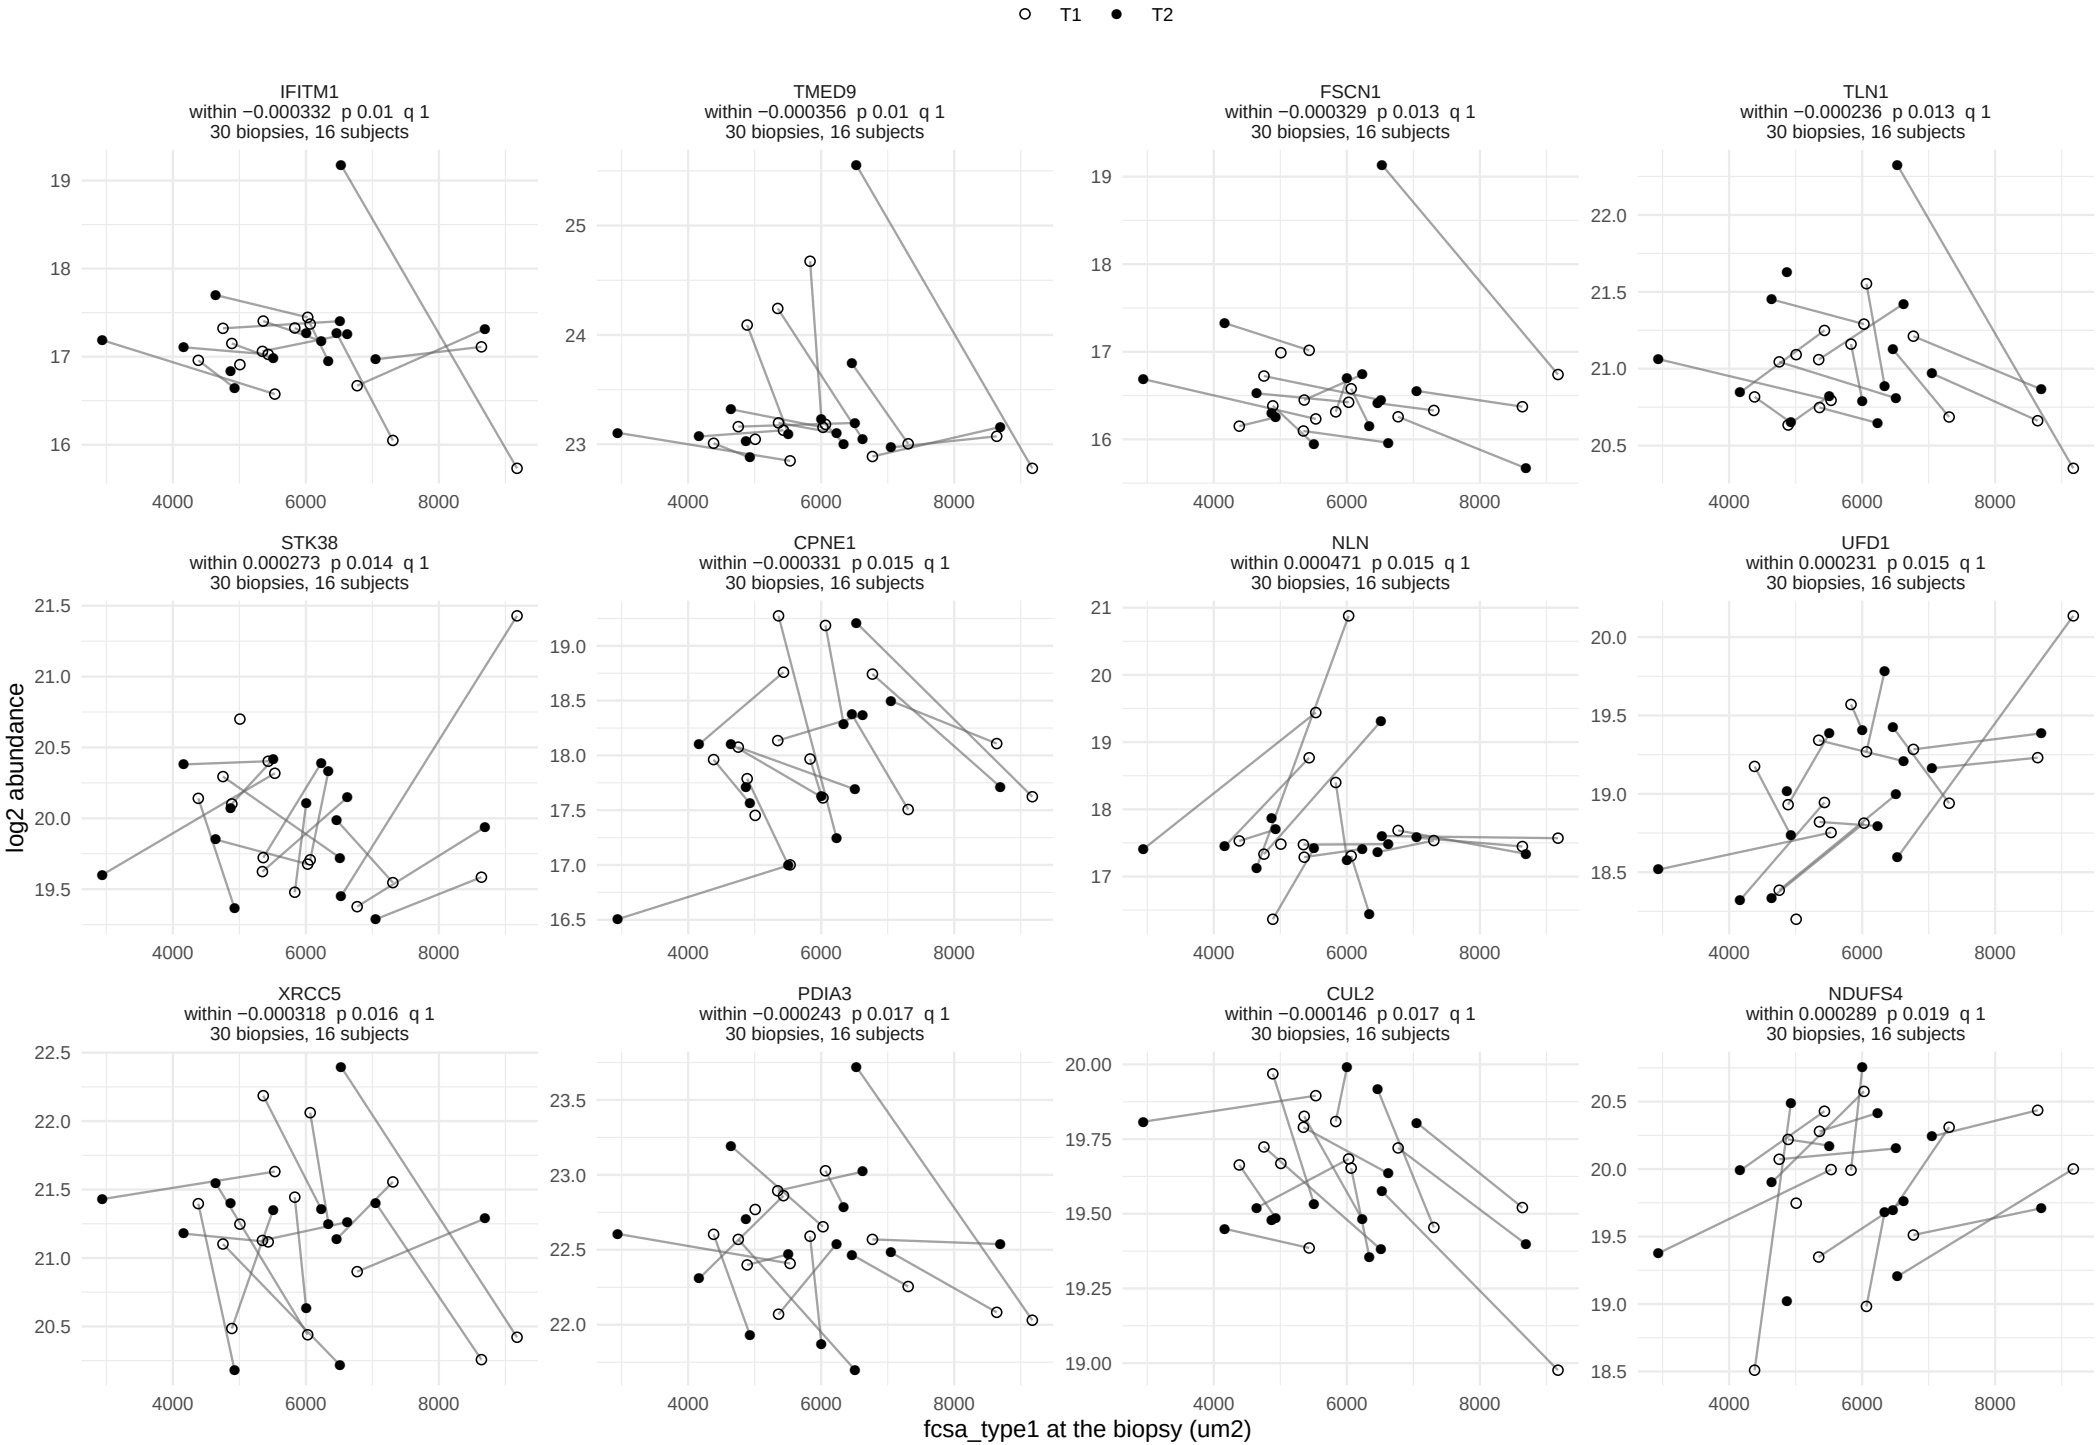

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

fcsa_type1, within−person term


68 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 3 of 6.

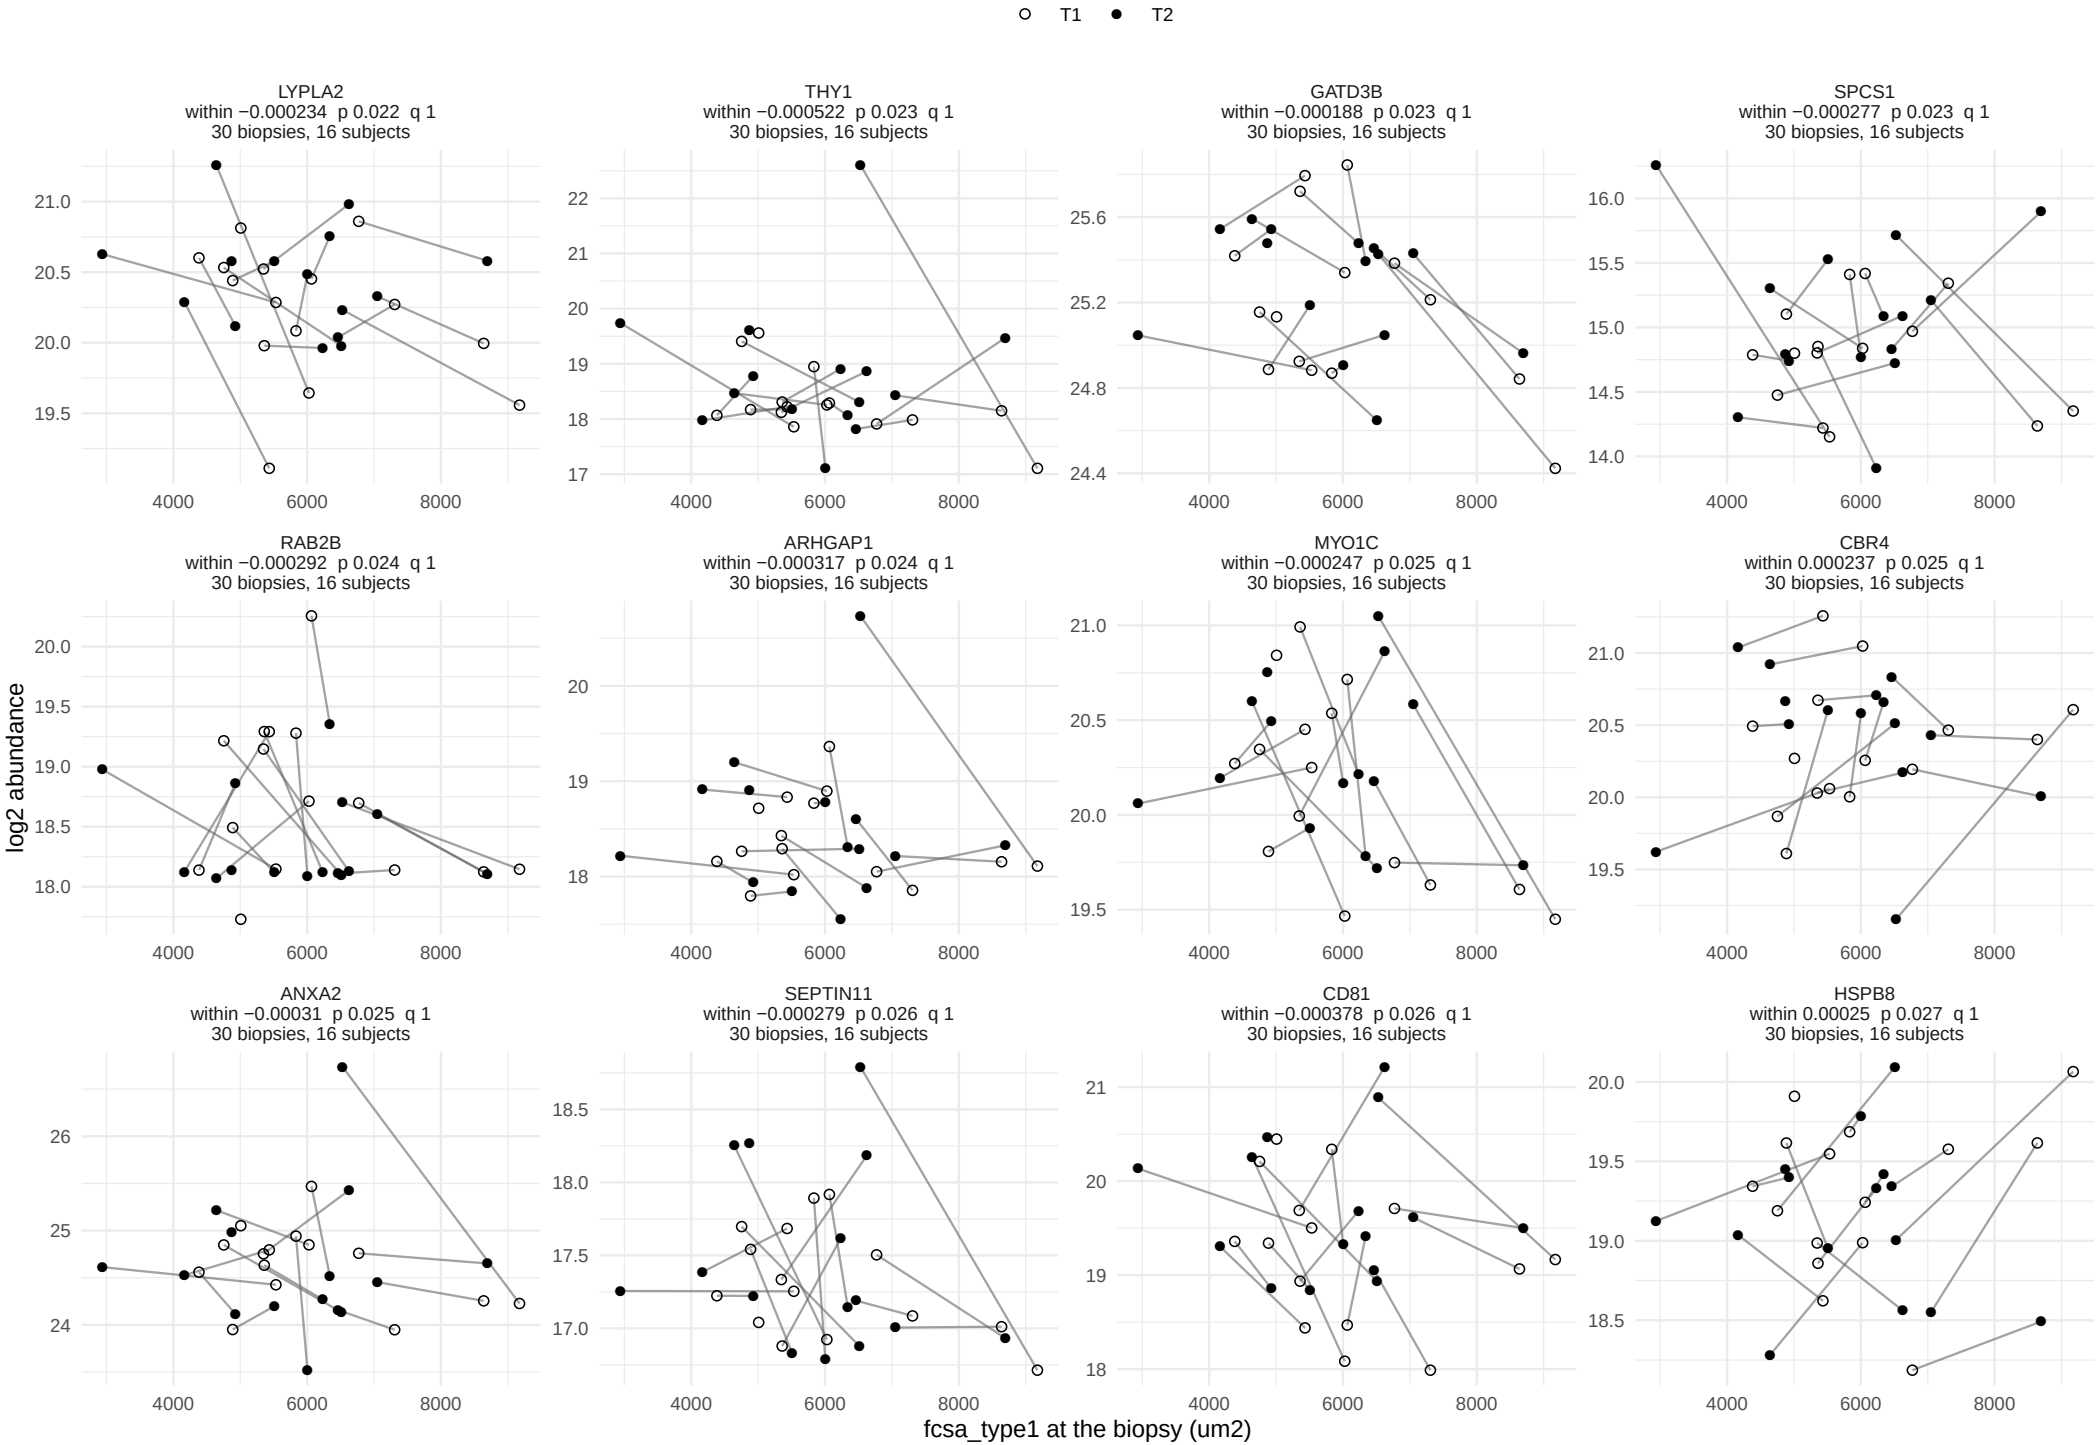

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

fcsa_type1, within−person term


68 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 4 of 6.

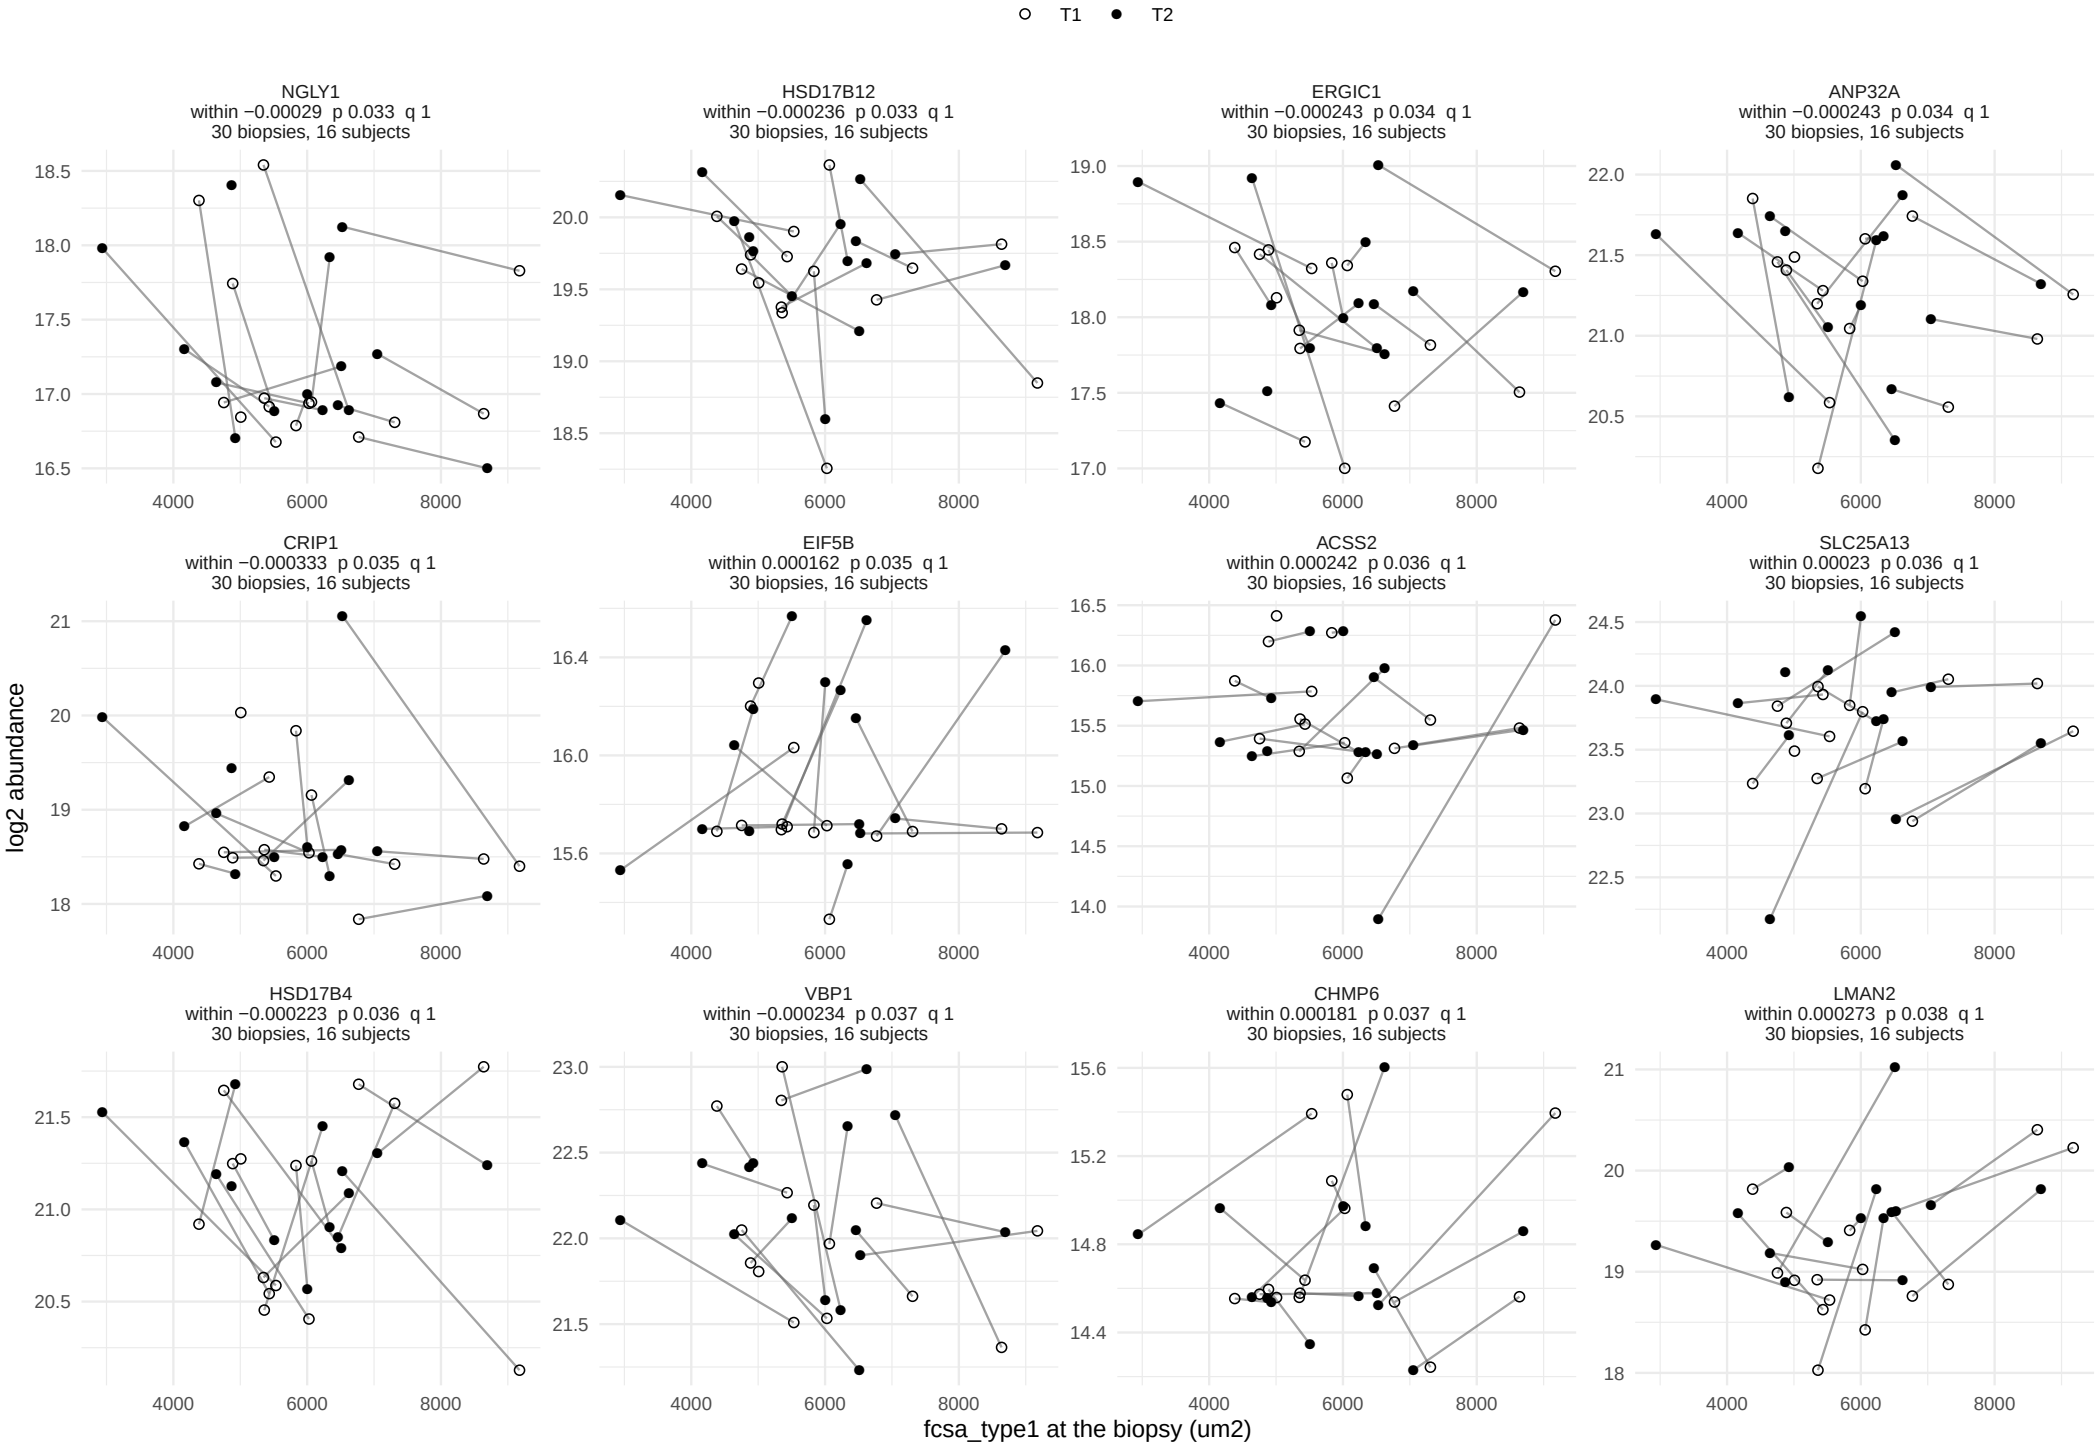

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

fcsa_type1, within−person term


68 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 5 of 6.

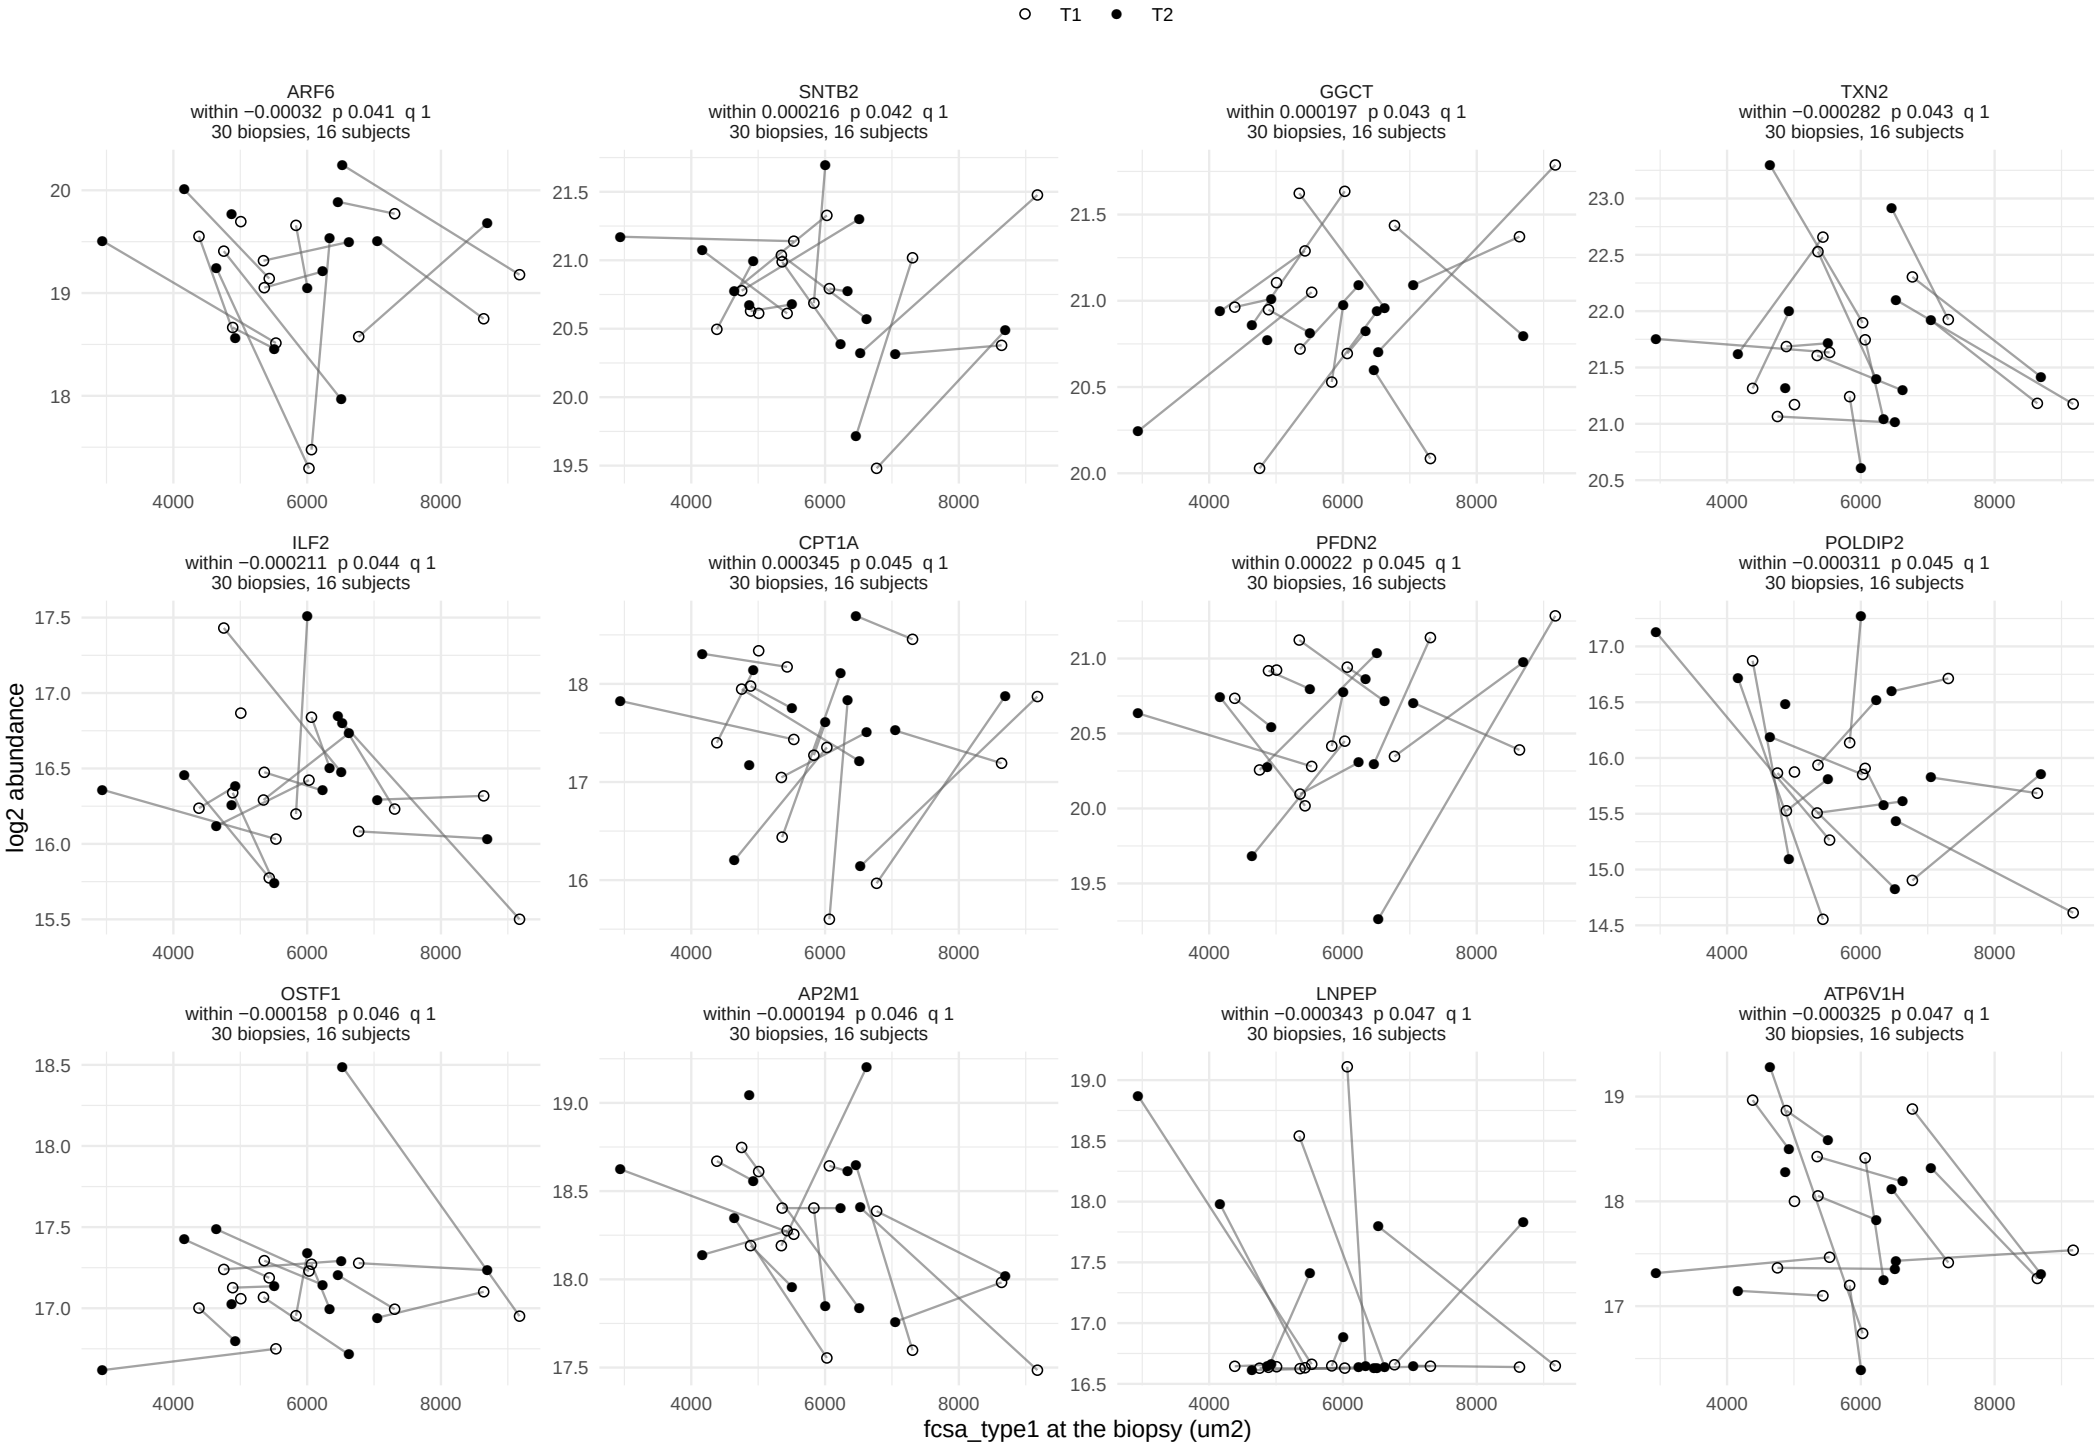

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

fcsa_type1, within−person term


68 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 6 of 6.

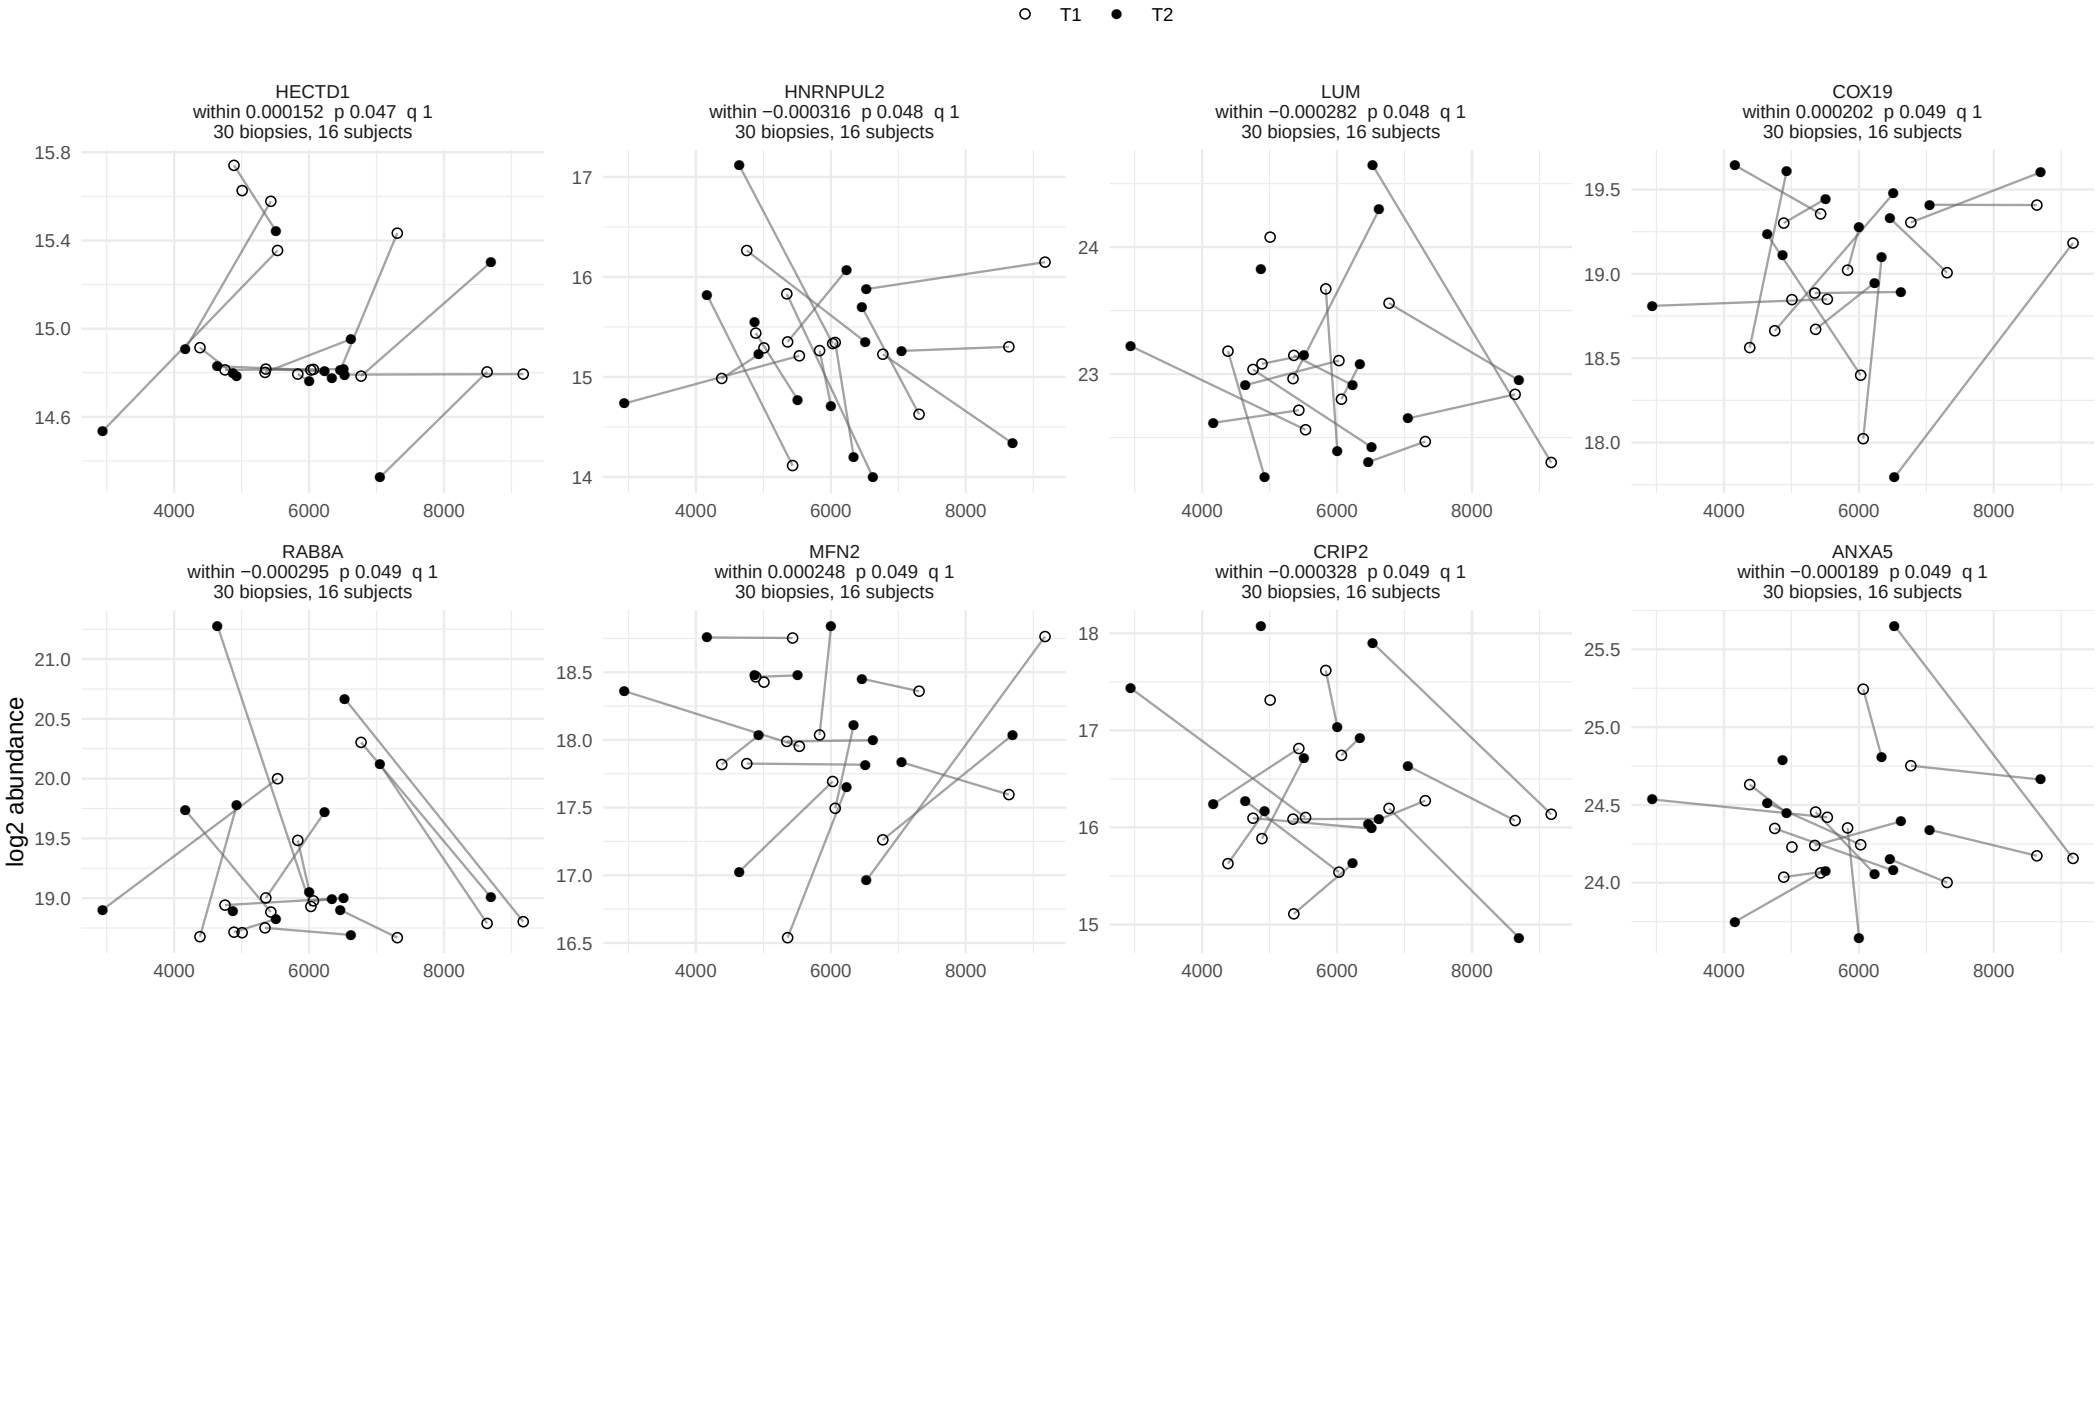

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

fcsa_type1, between−person term


69 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 1 of 6.

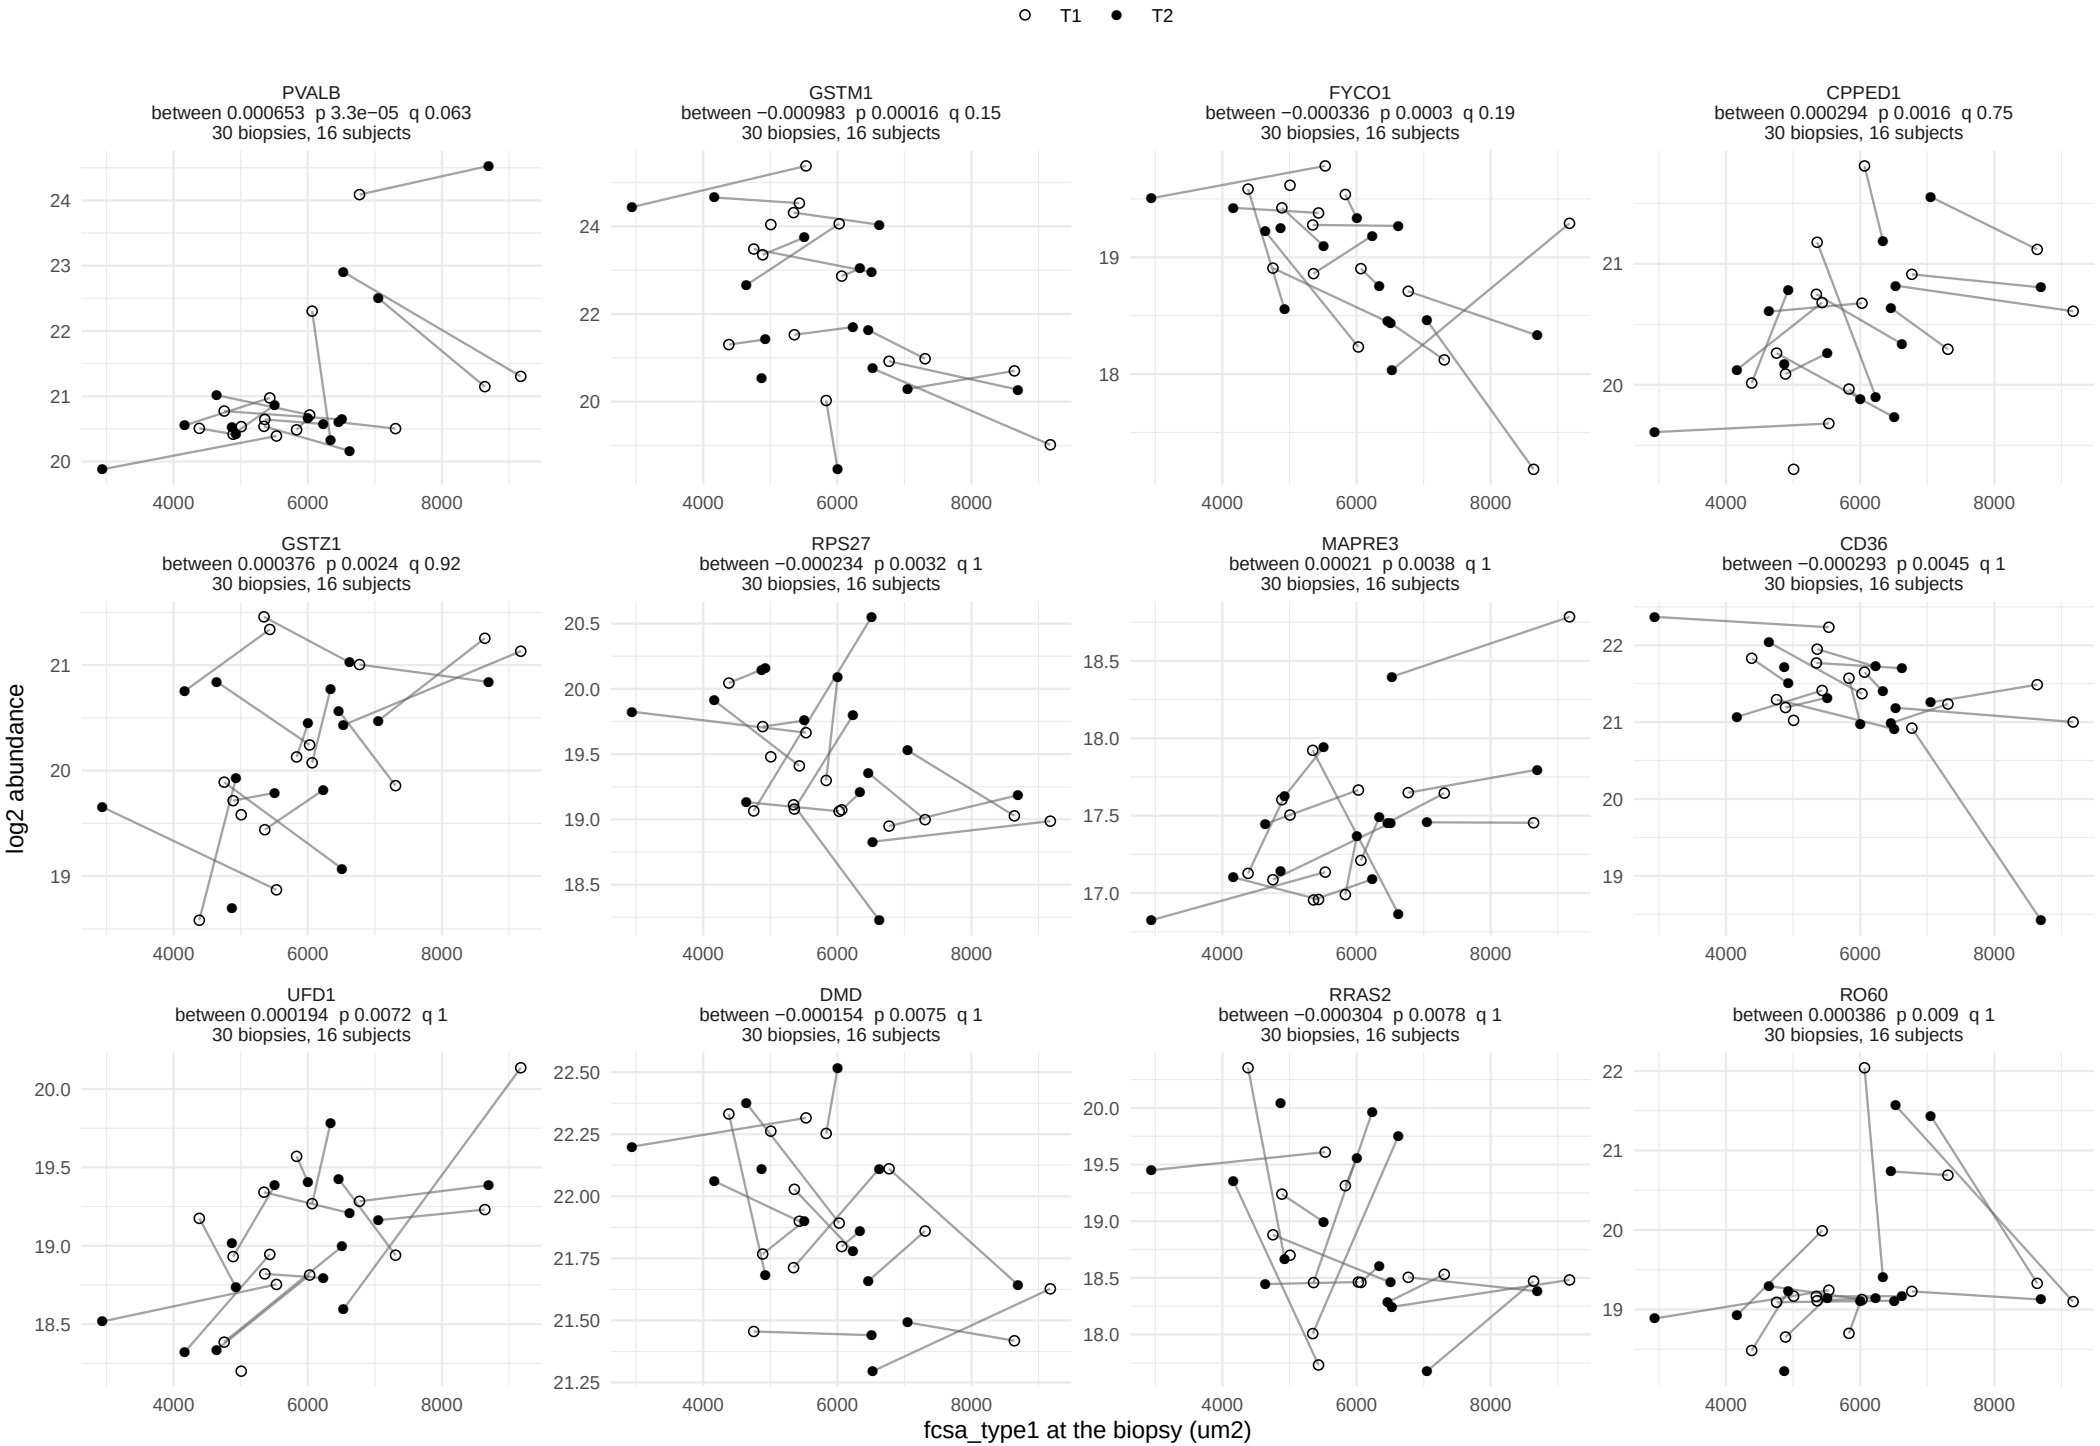

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

fcsa_type1, between−person term


69 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 2 of 6.

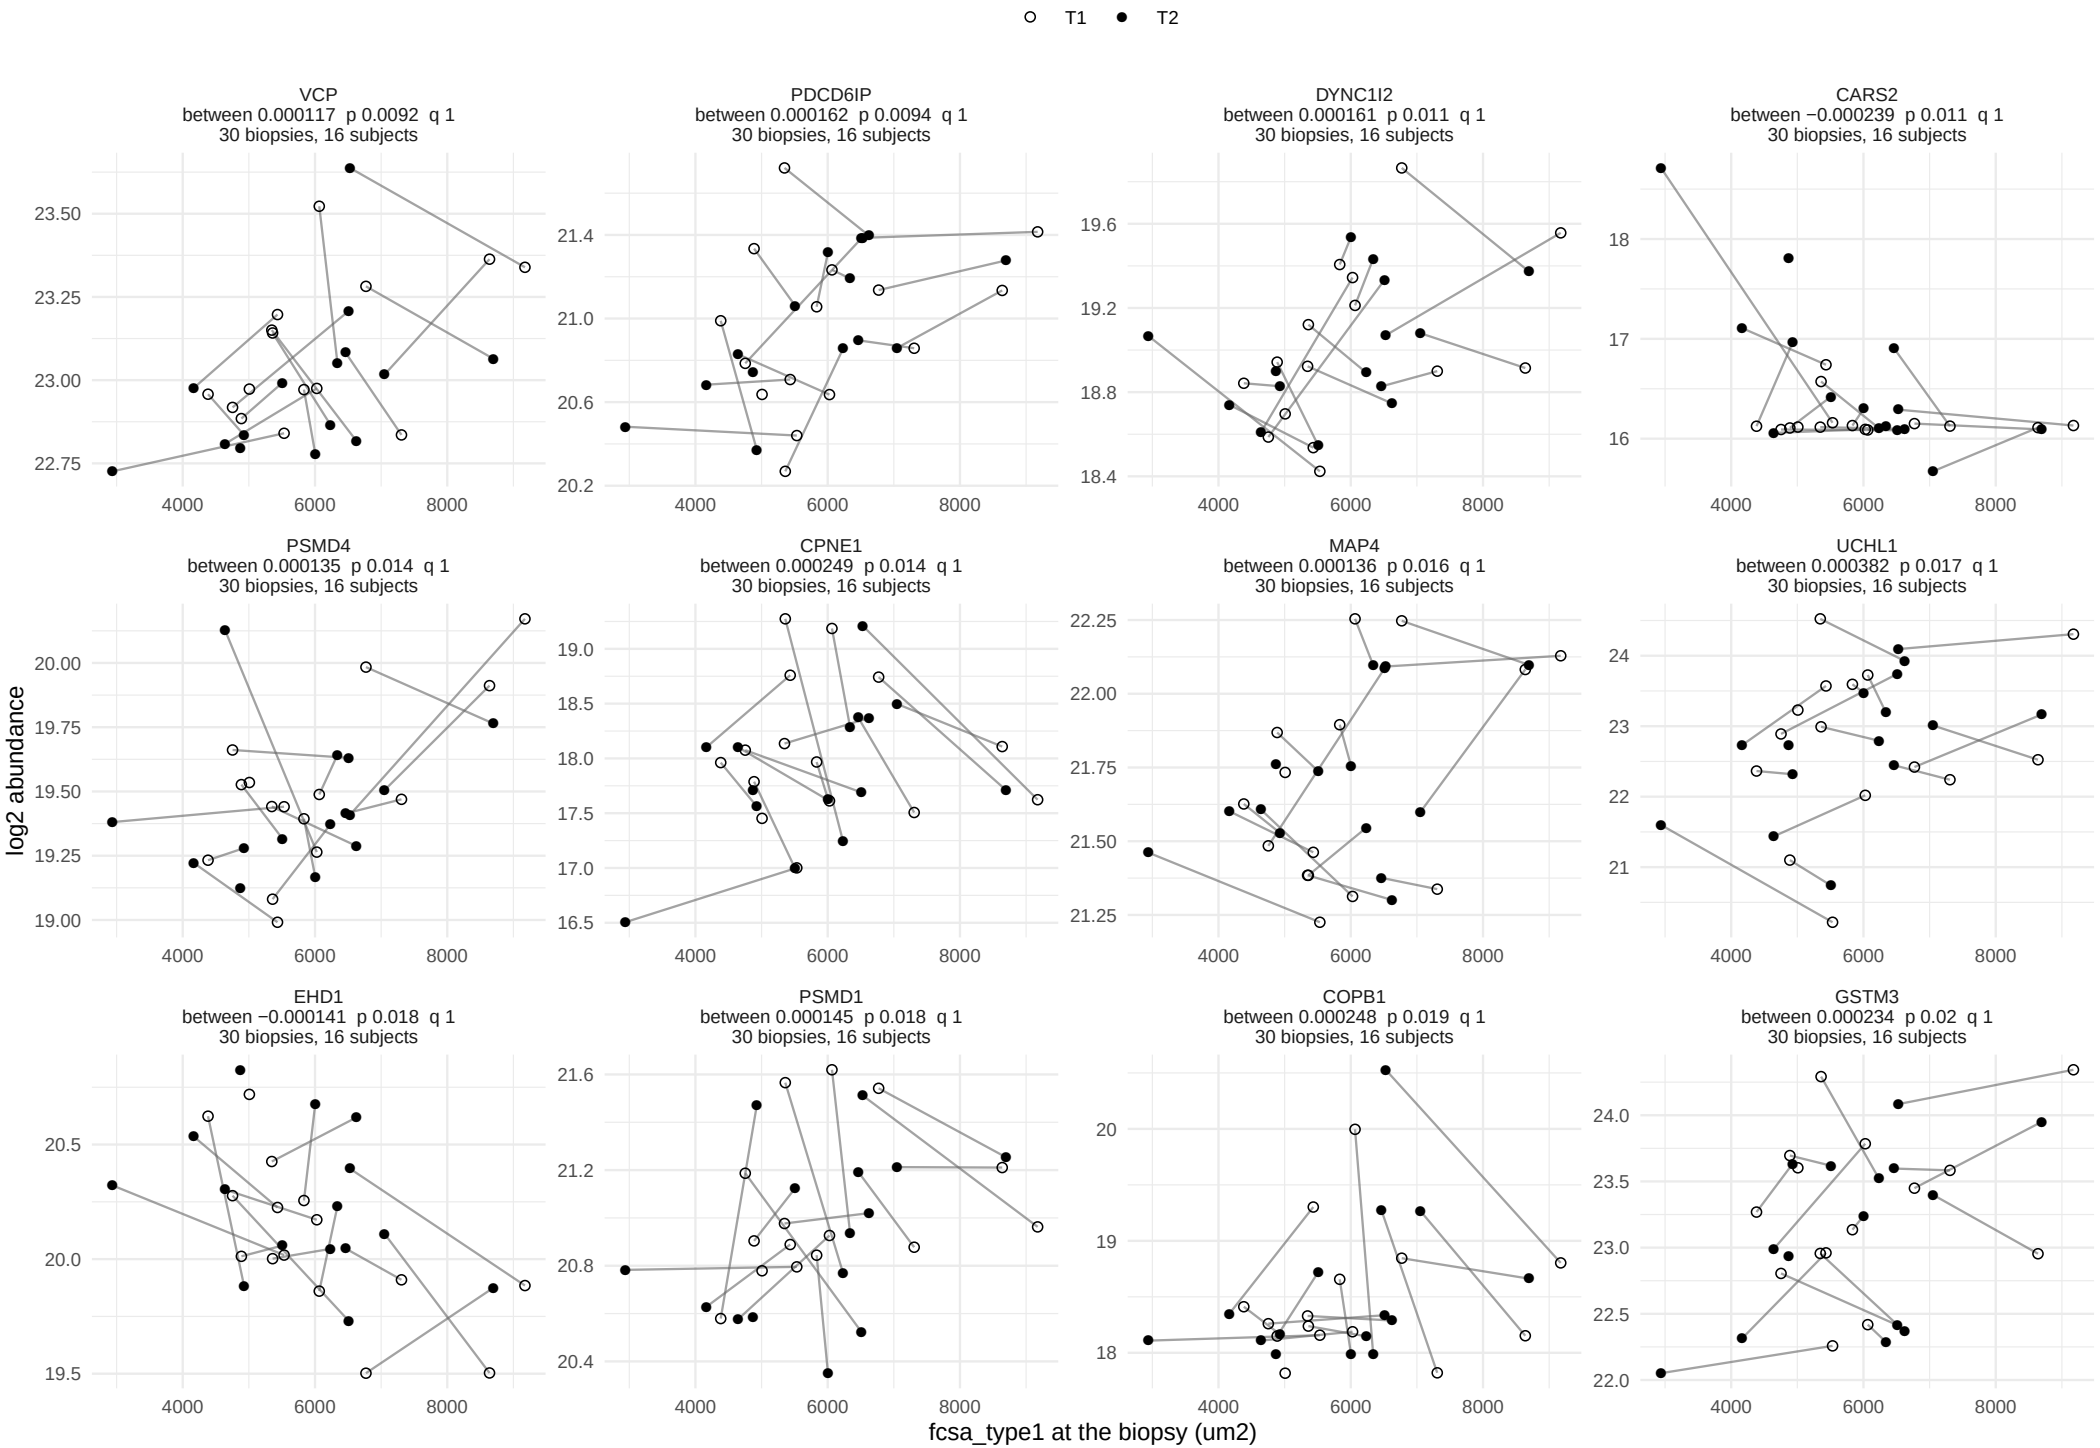

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

fcsa_type1, between−person term


69 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 3 of 6.

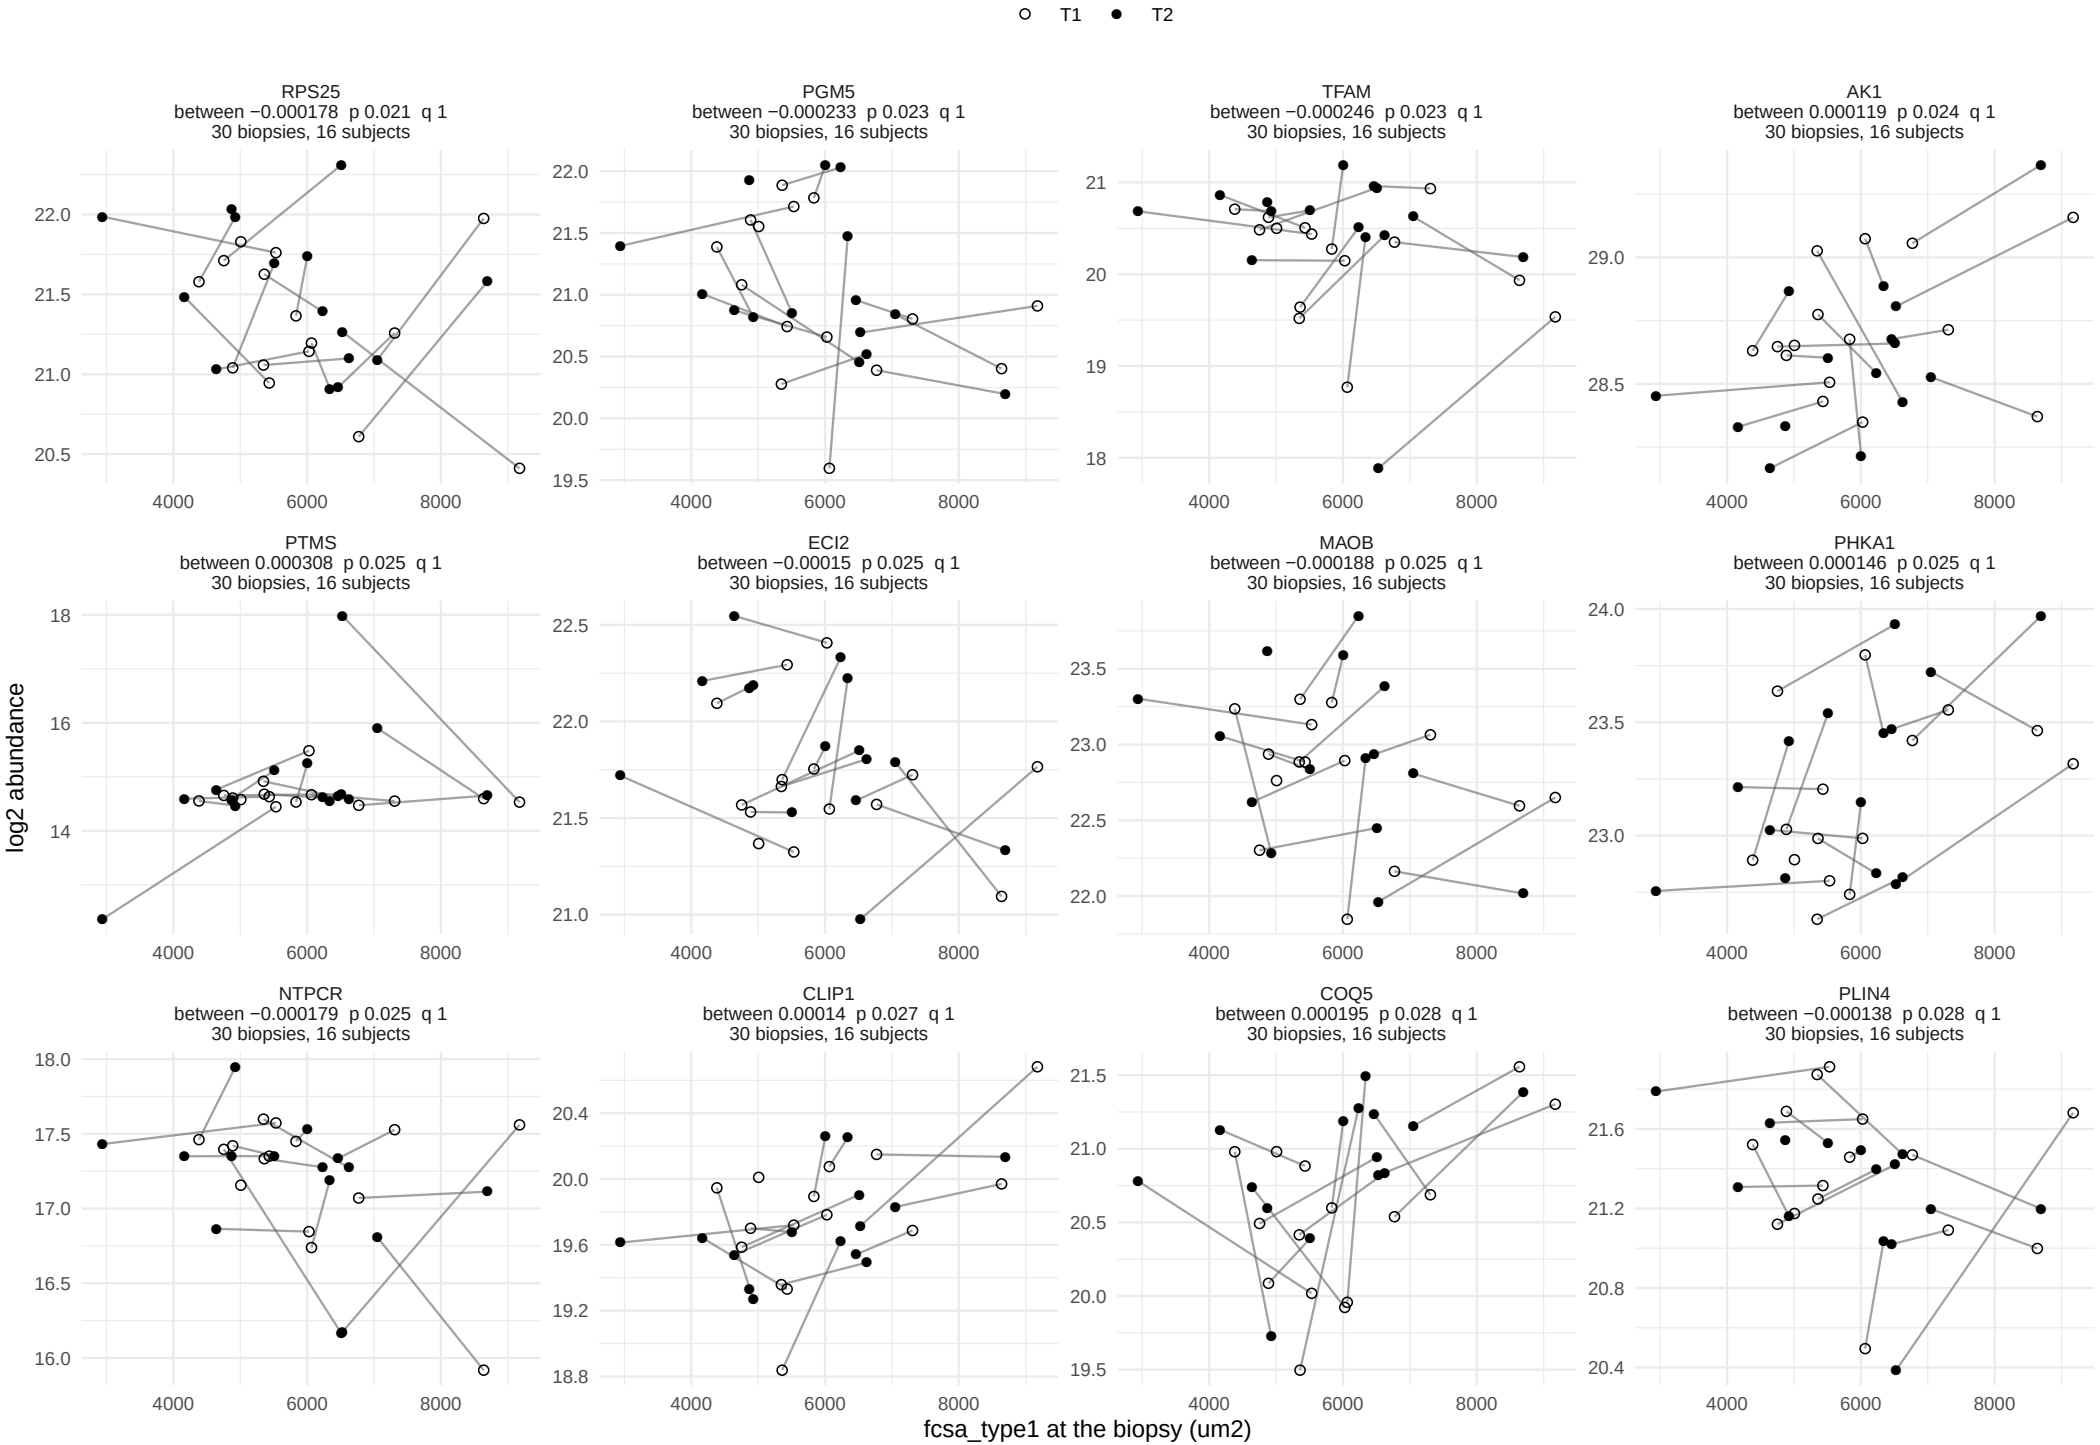

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

fcsa_type1, between−person term


69 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 4 of 6.

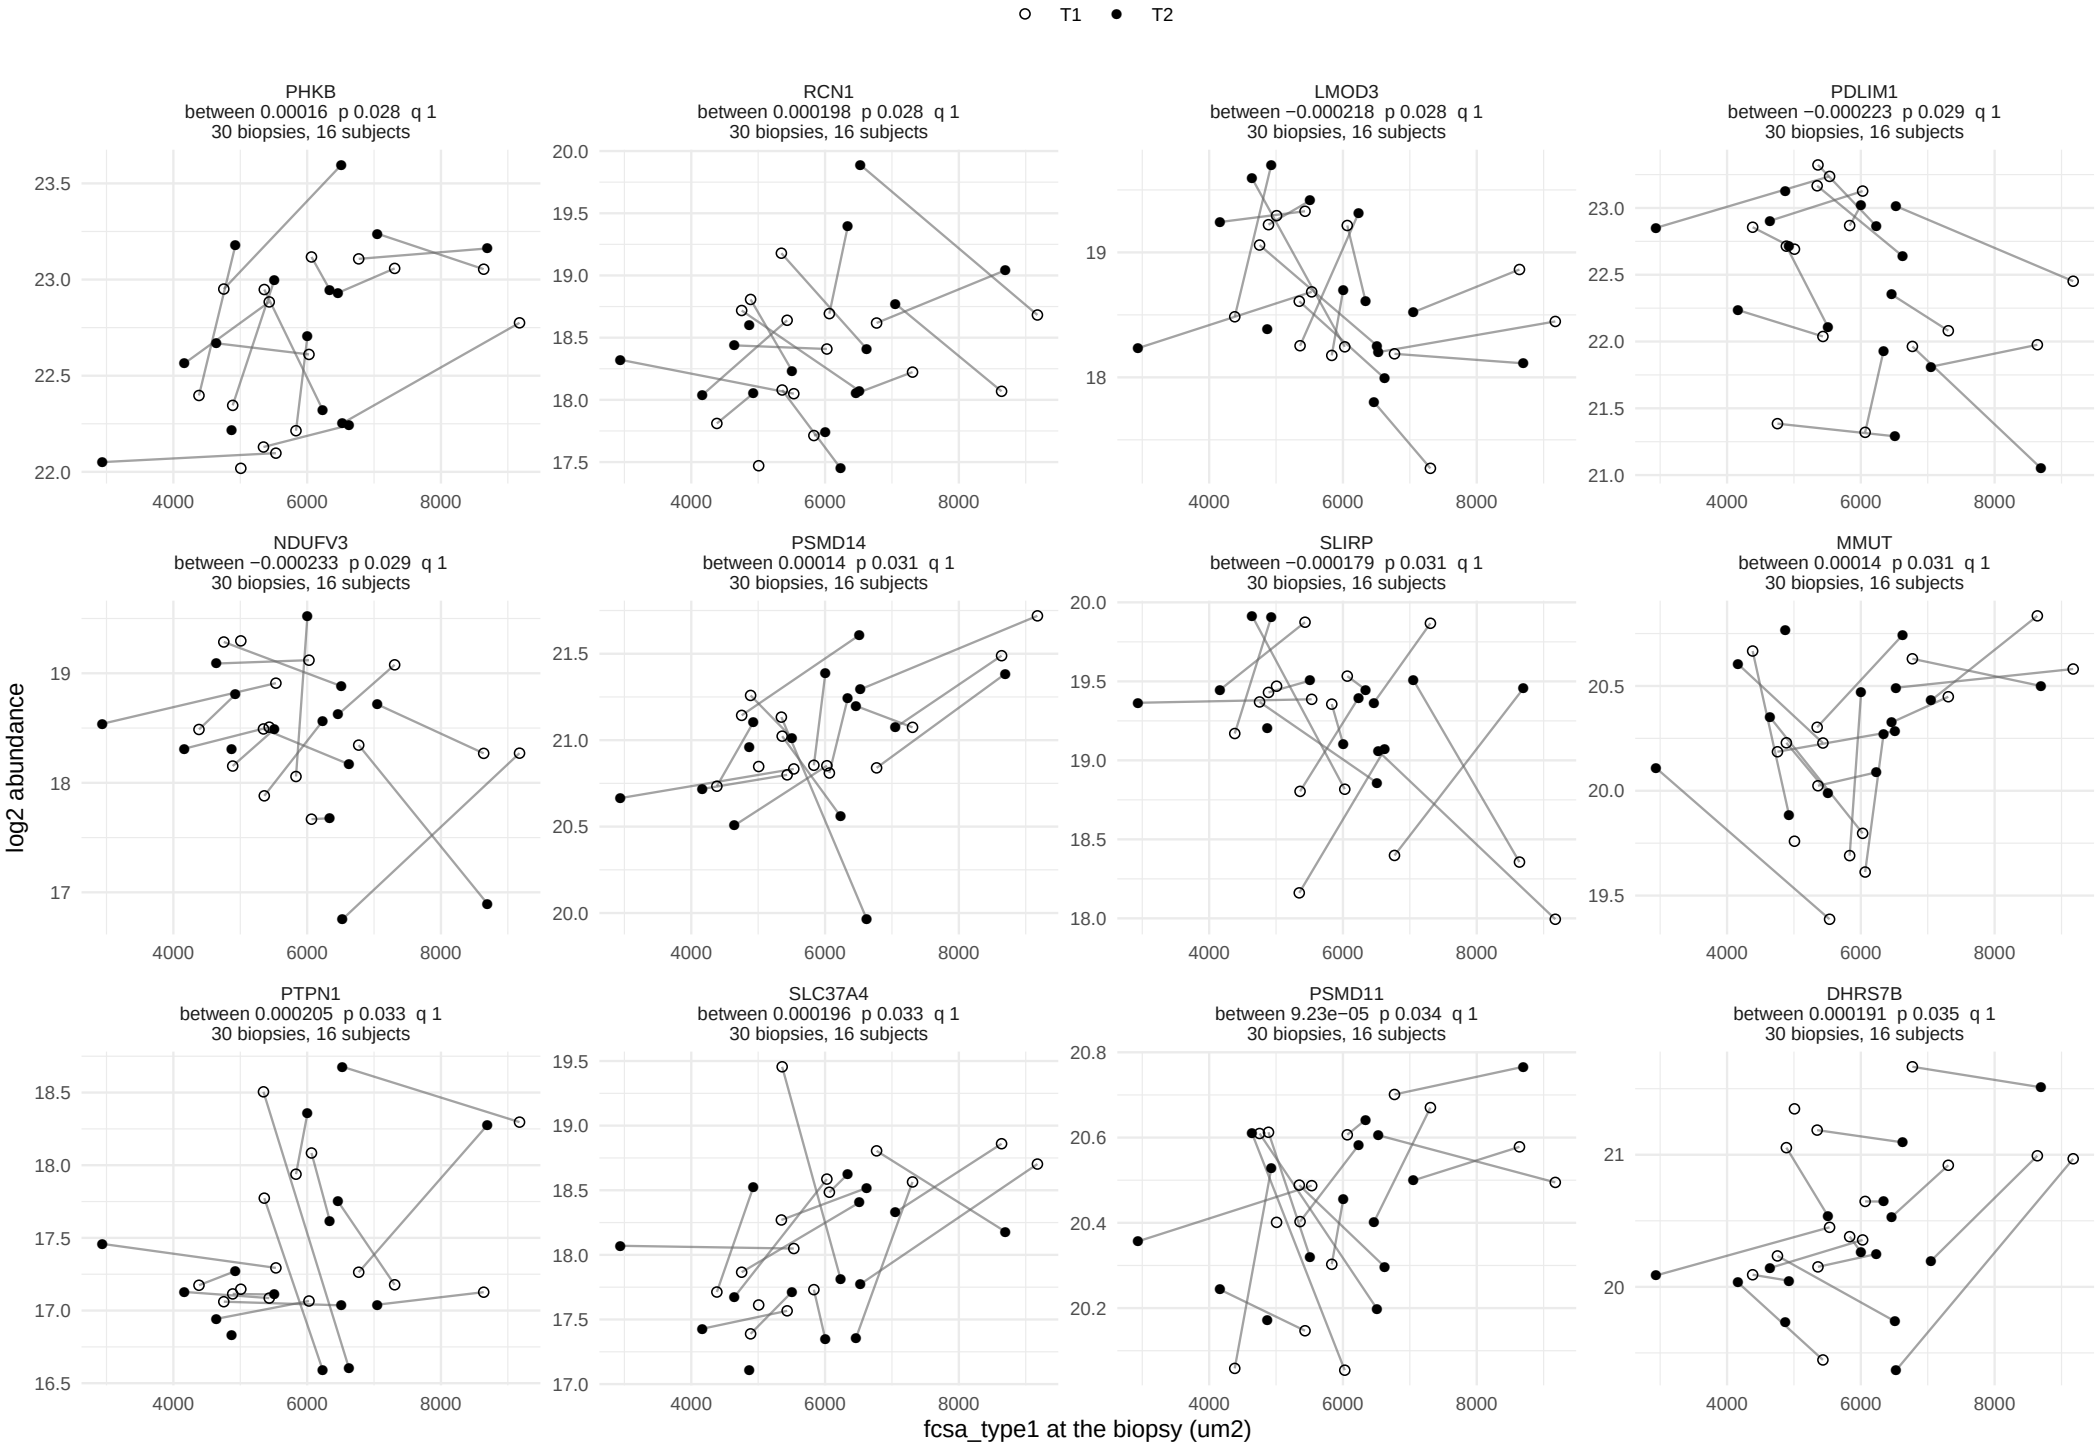

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

fcsa_type1, between−person term


69 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 5 of 6.

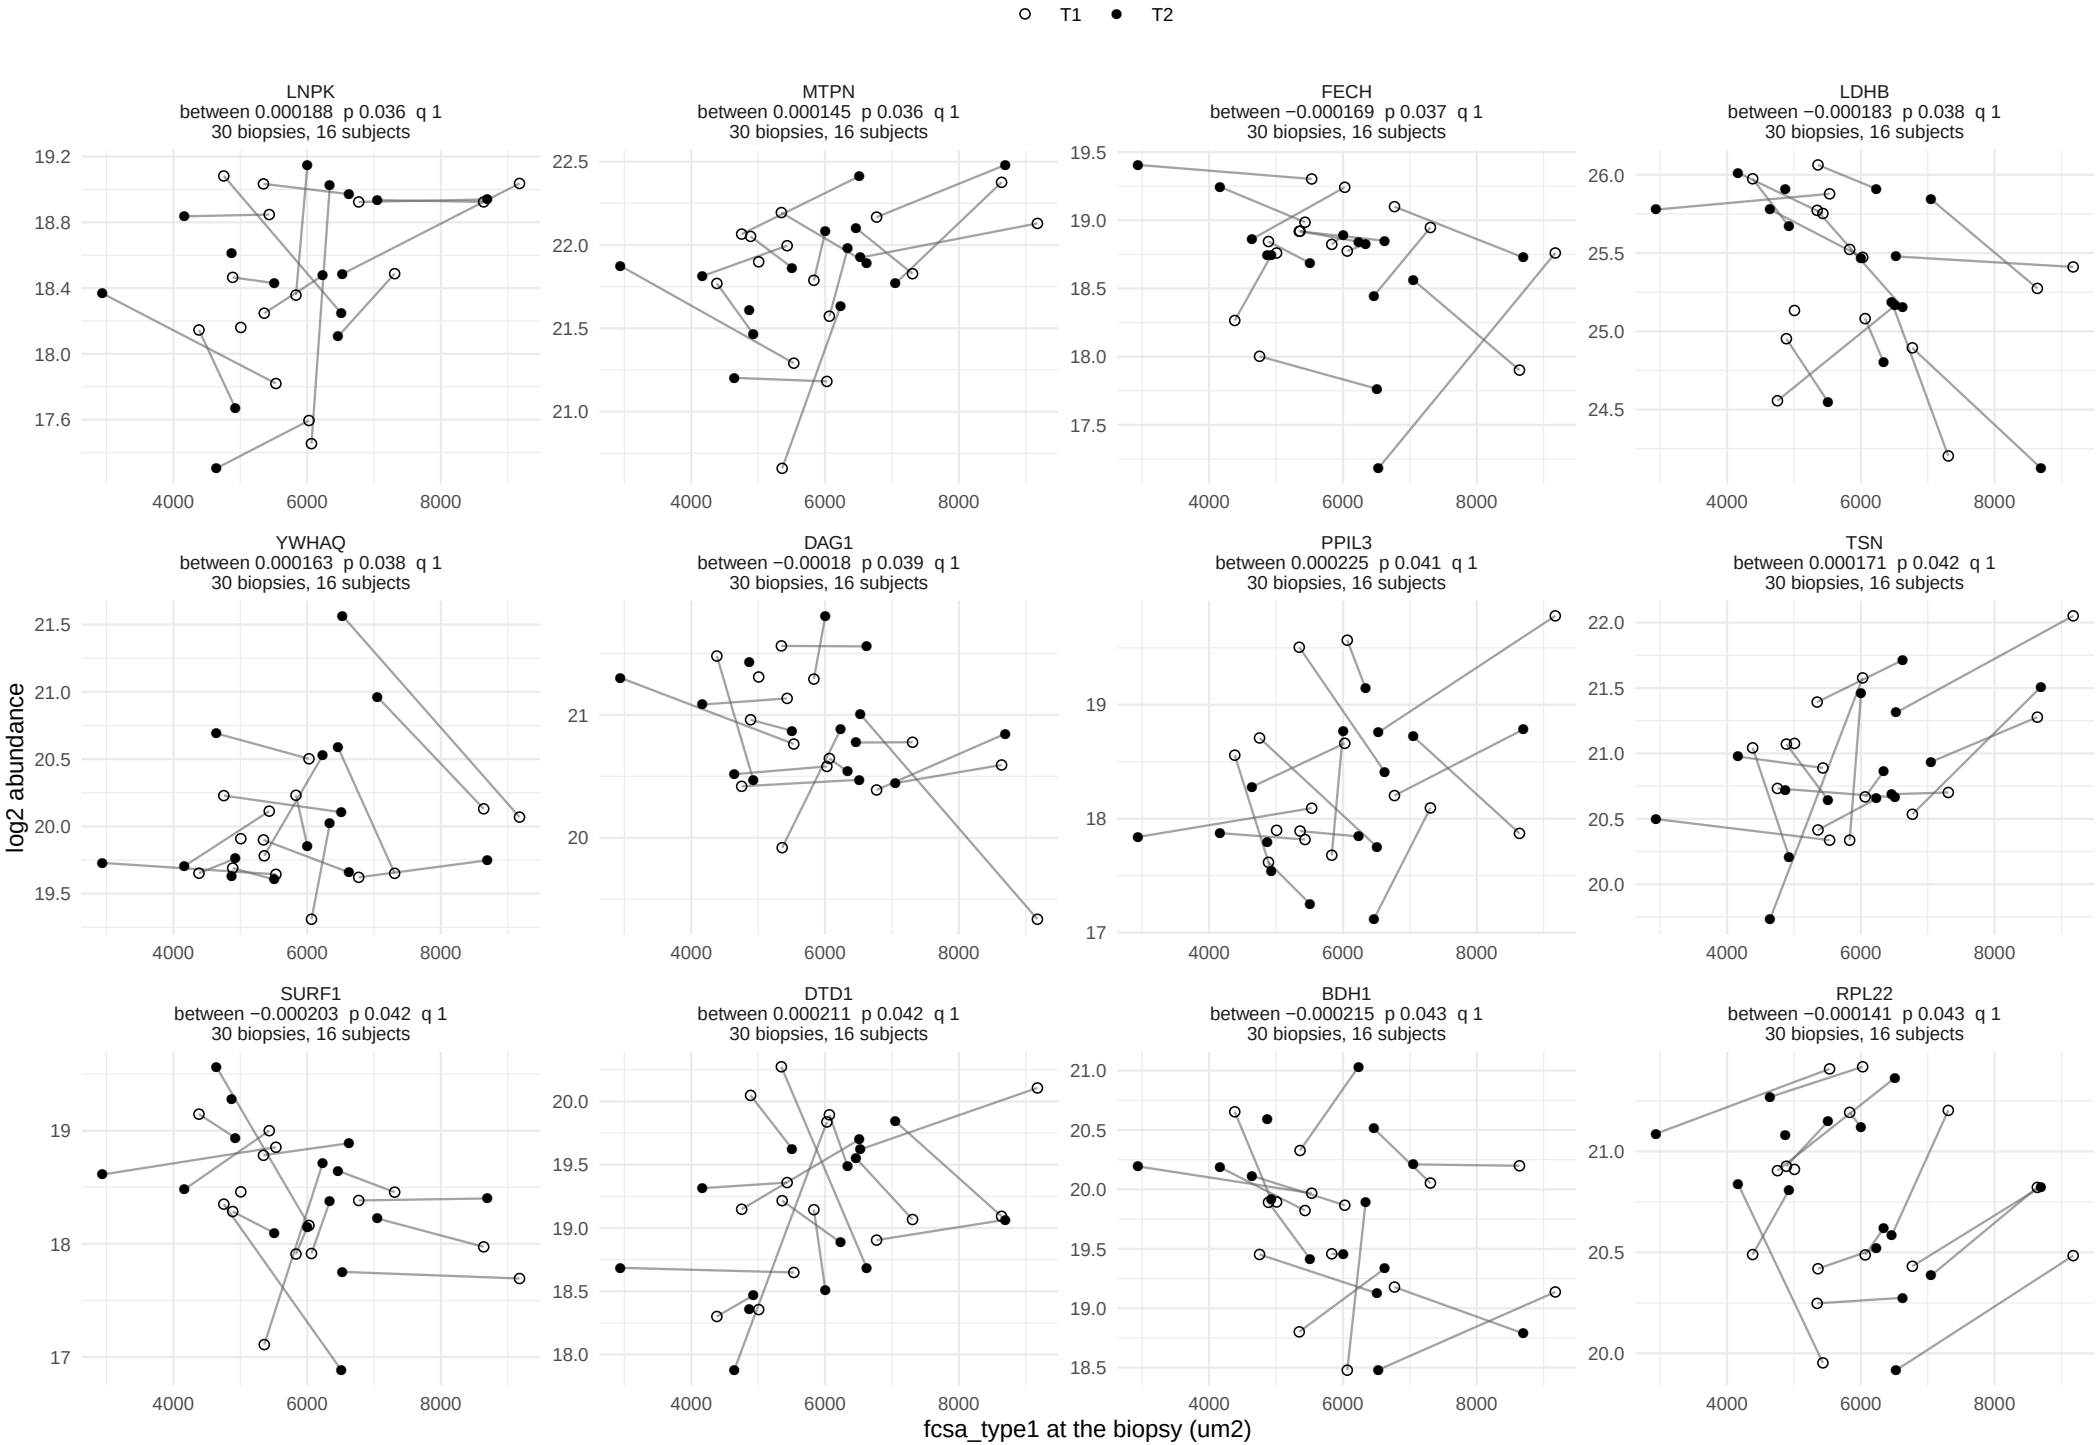

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

fcsa_type1, between−person term


69 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 6 of 6.

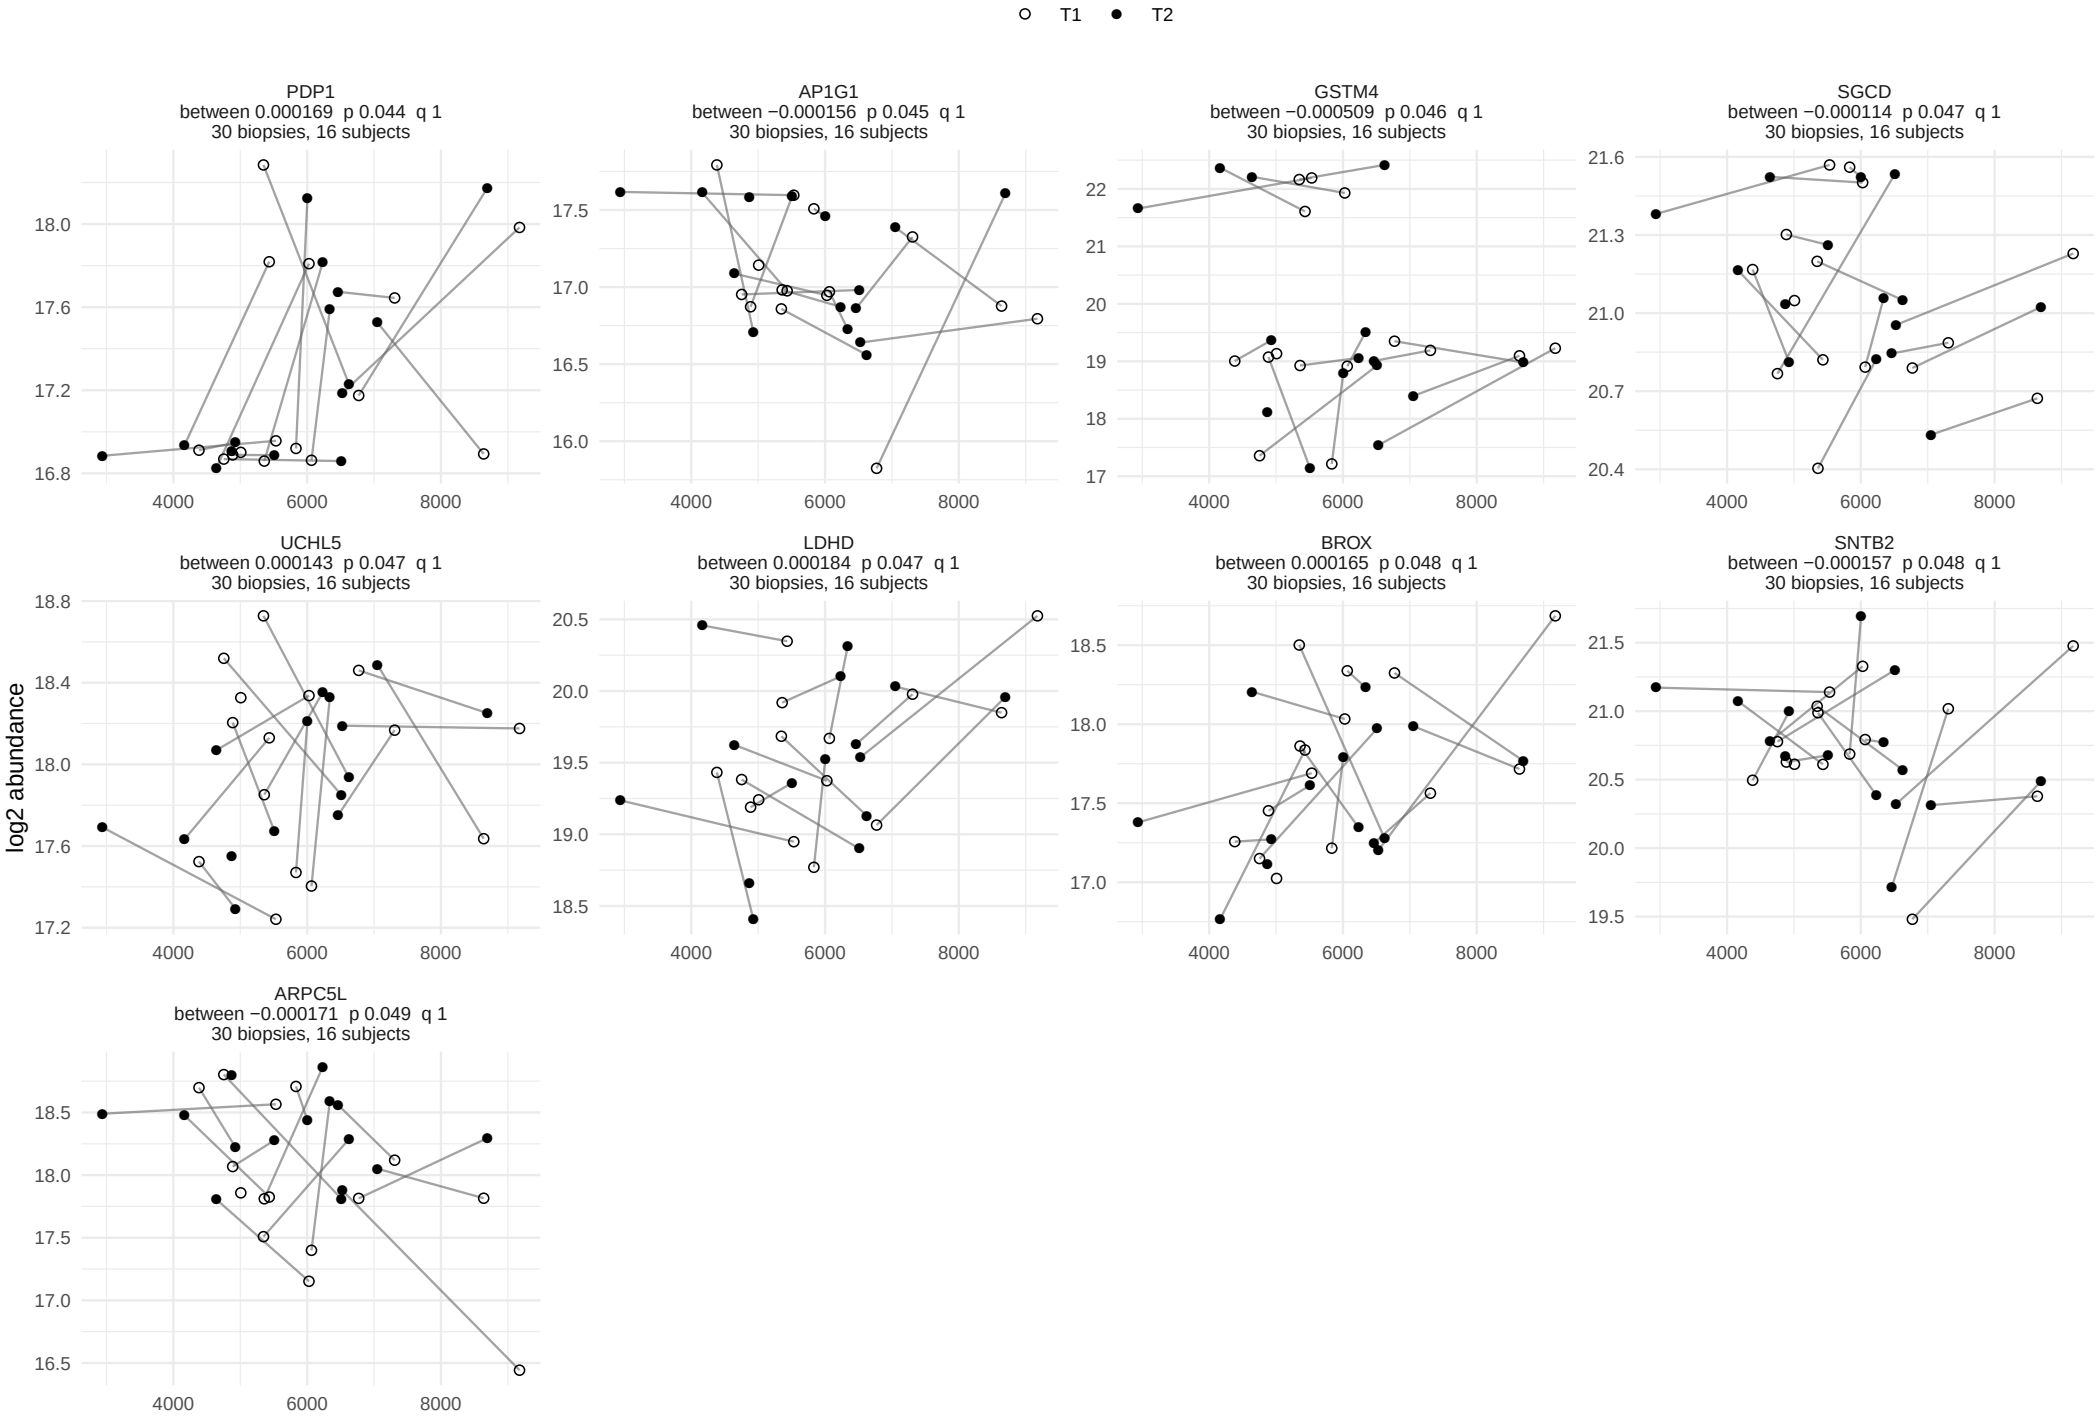

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

fcsa_type2, within−person term


76 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 1 of 7.

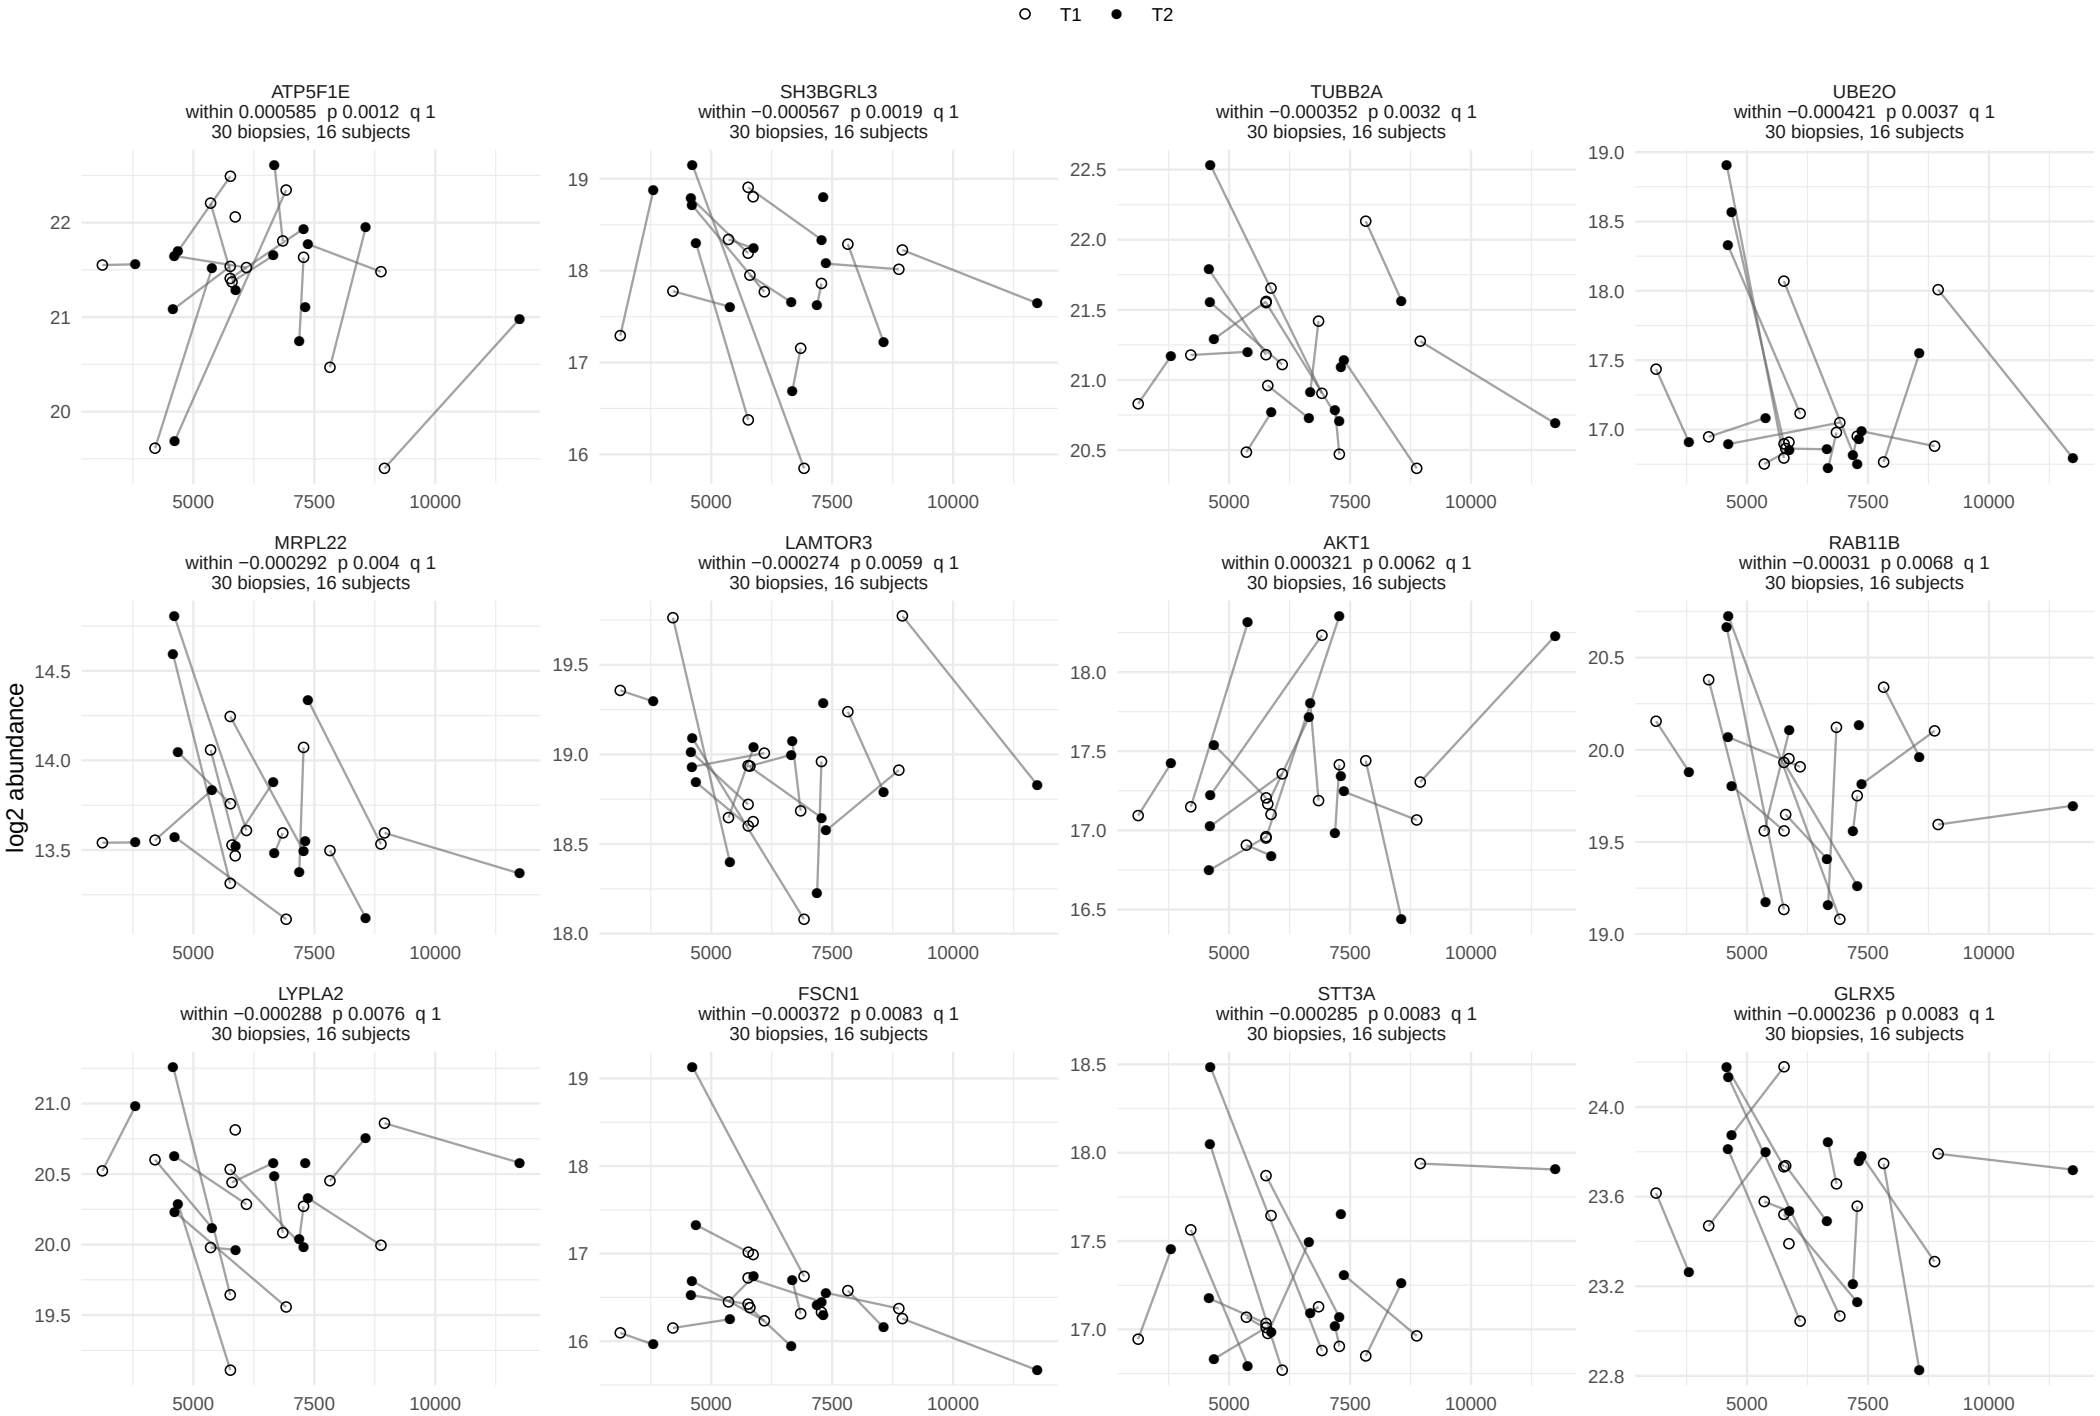

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

fcsa_type2, within−person term


76 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 2 of 7.

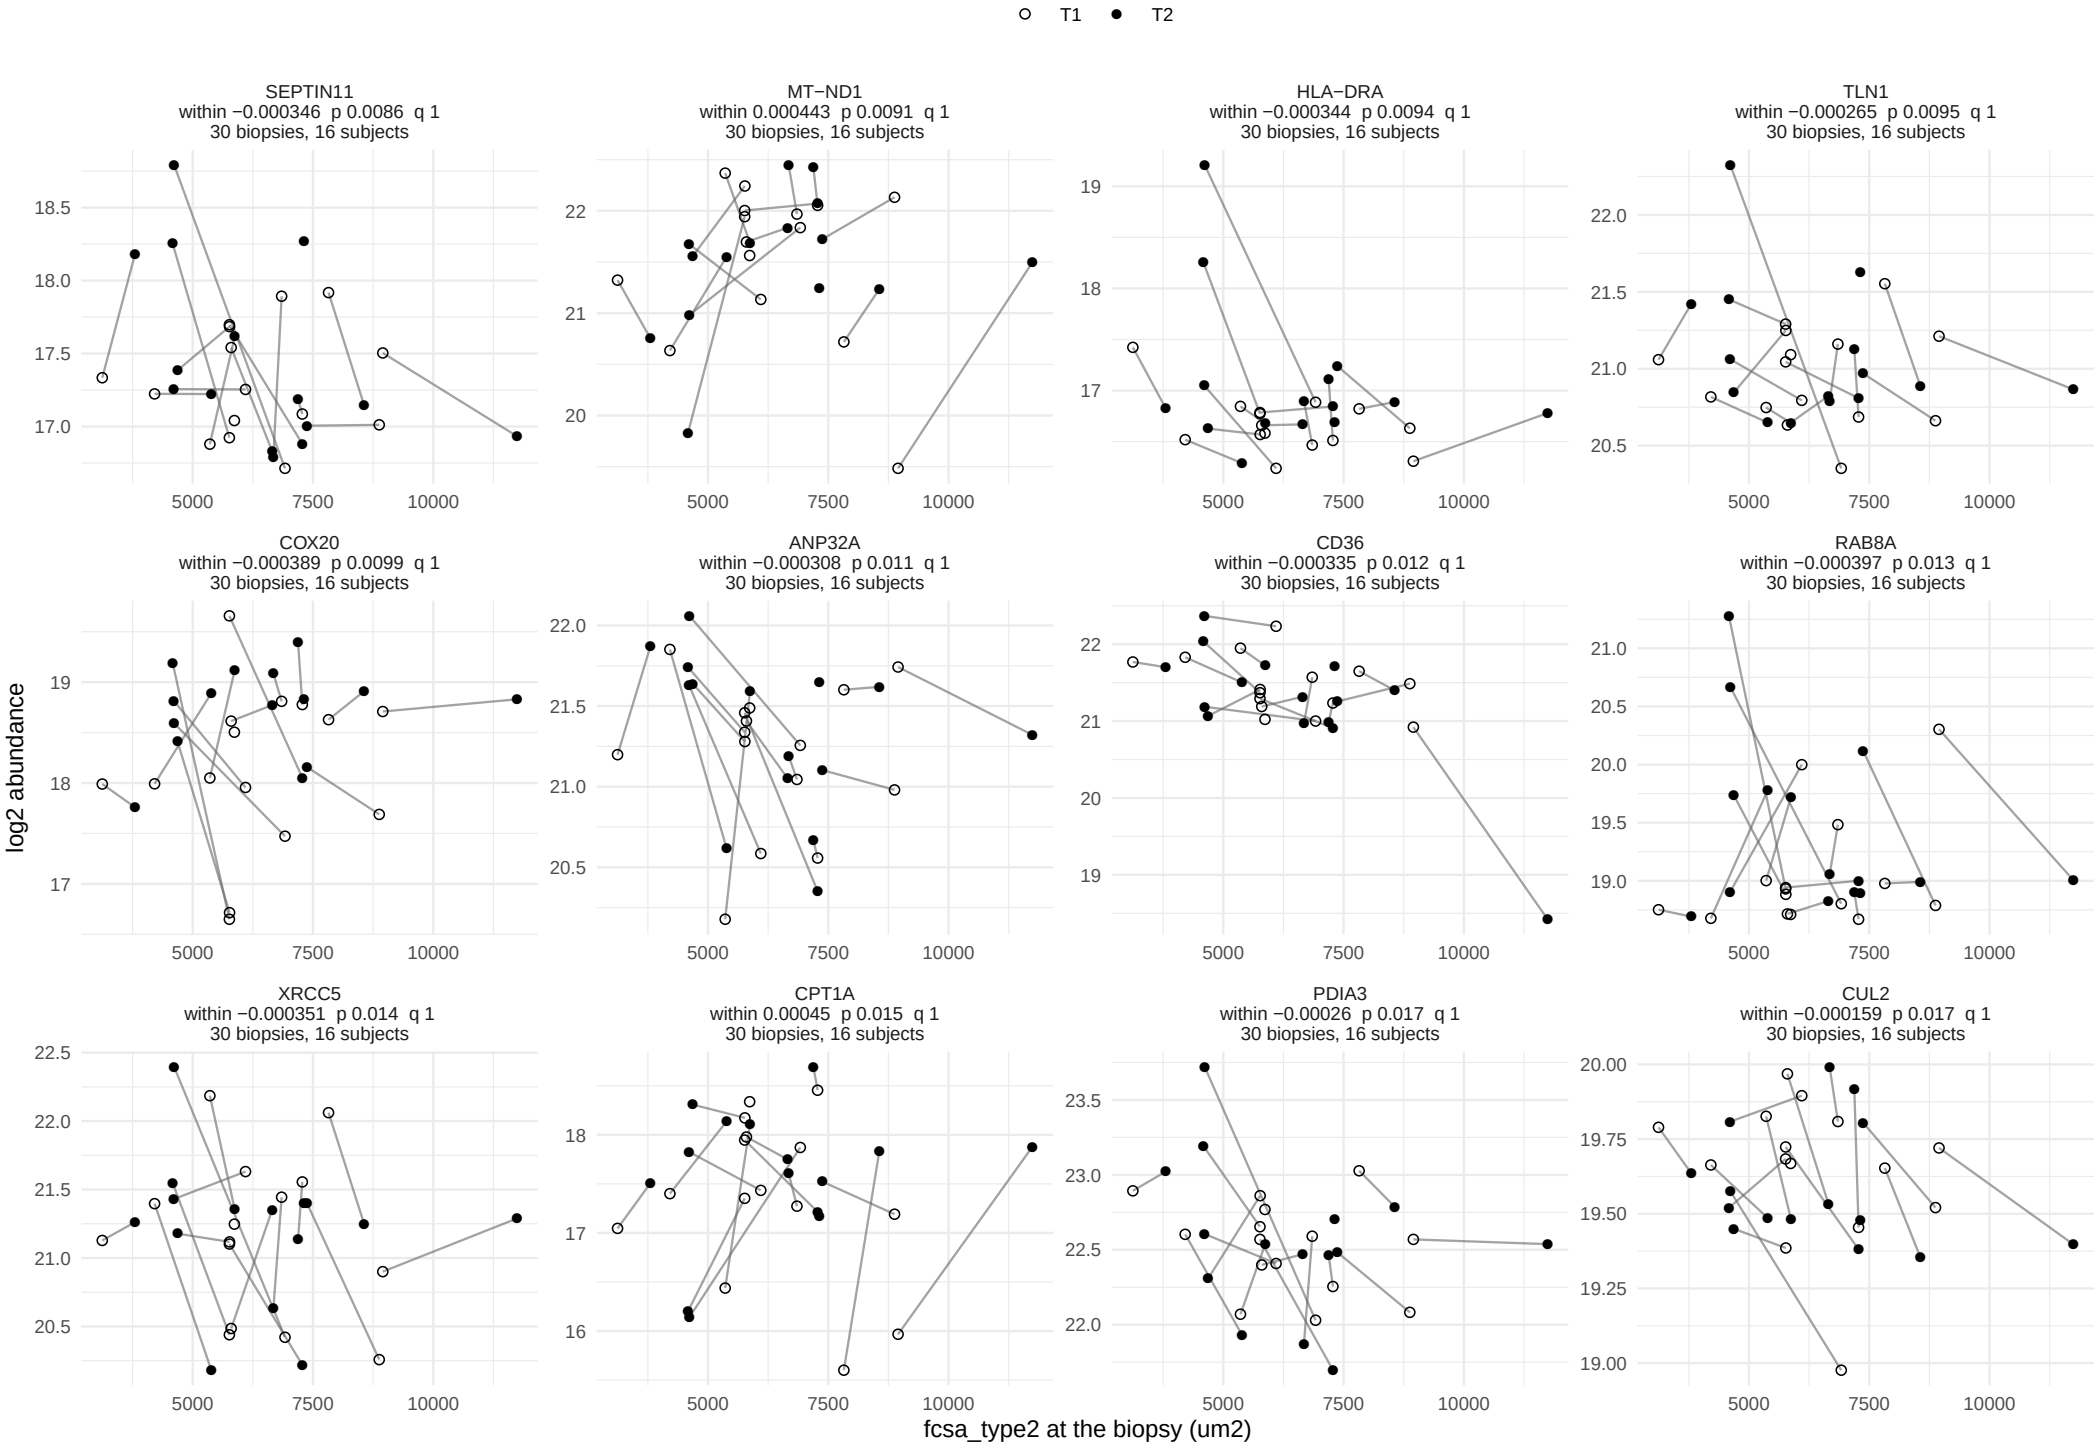

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

fcsa_type2, within−person term


76 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 3 of 7.

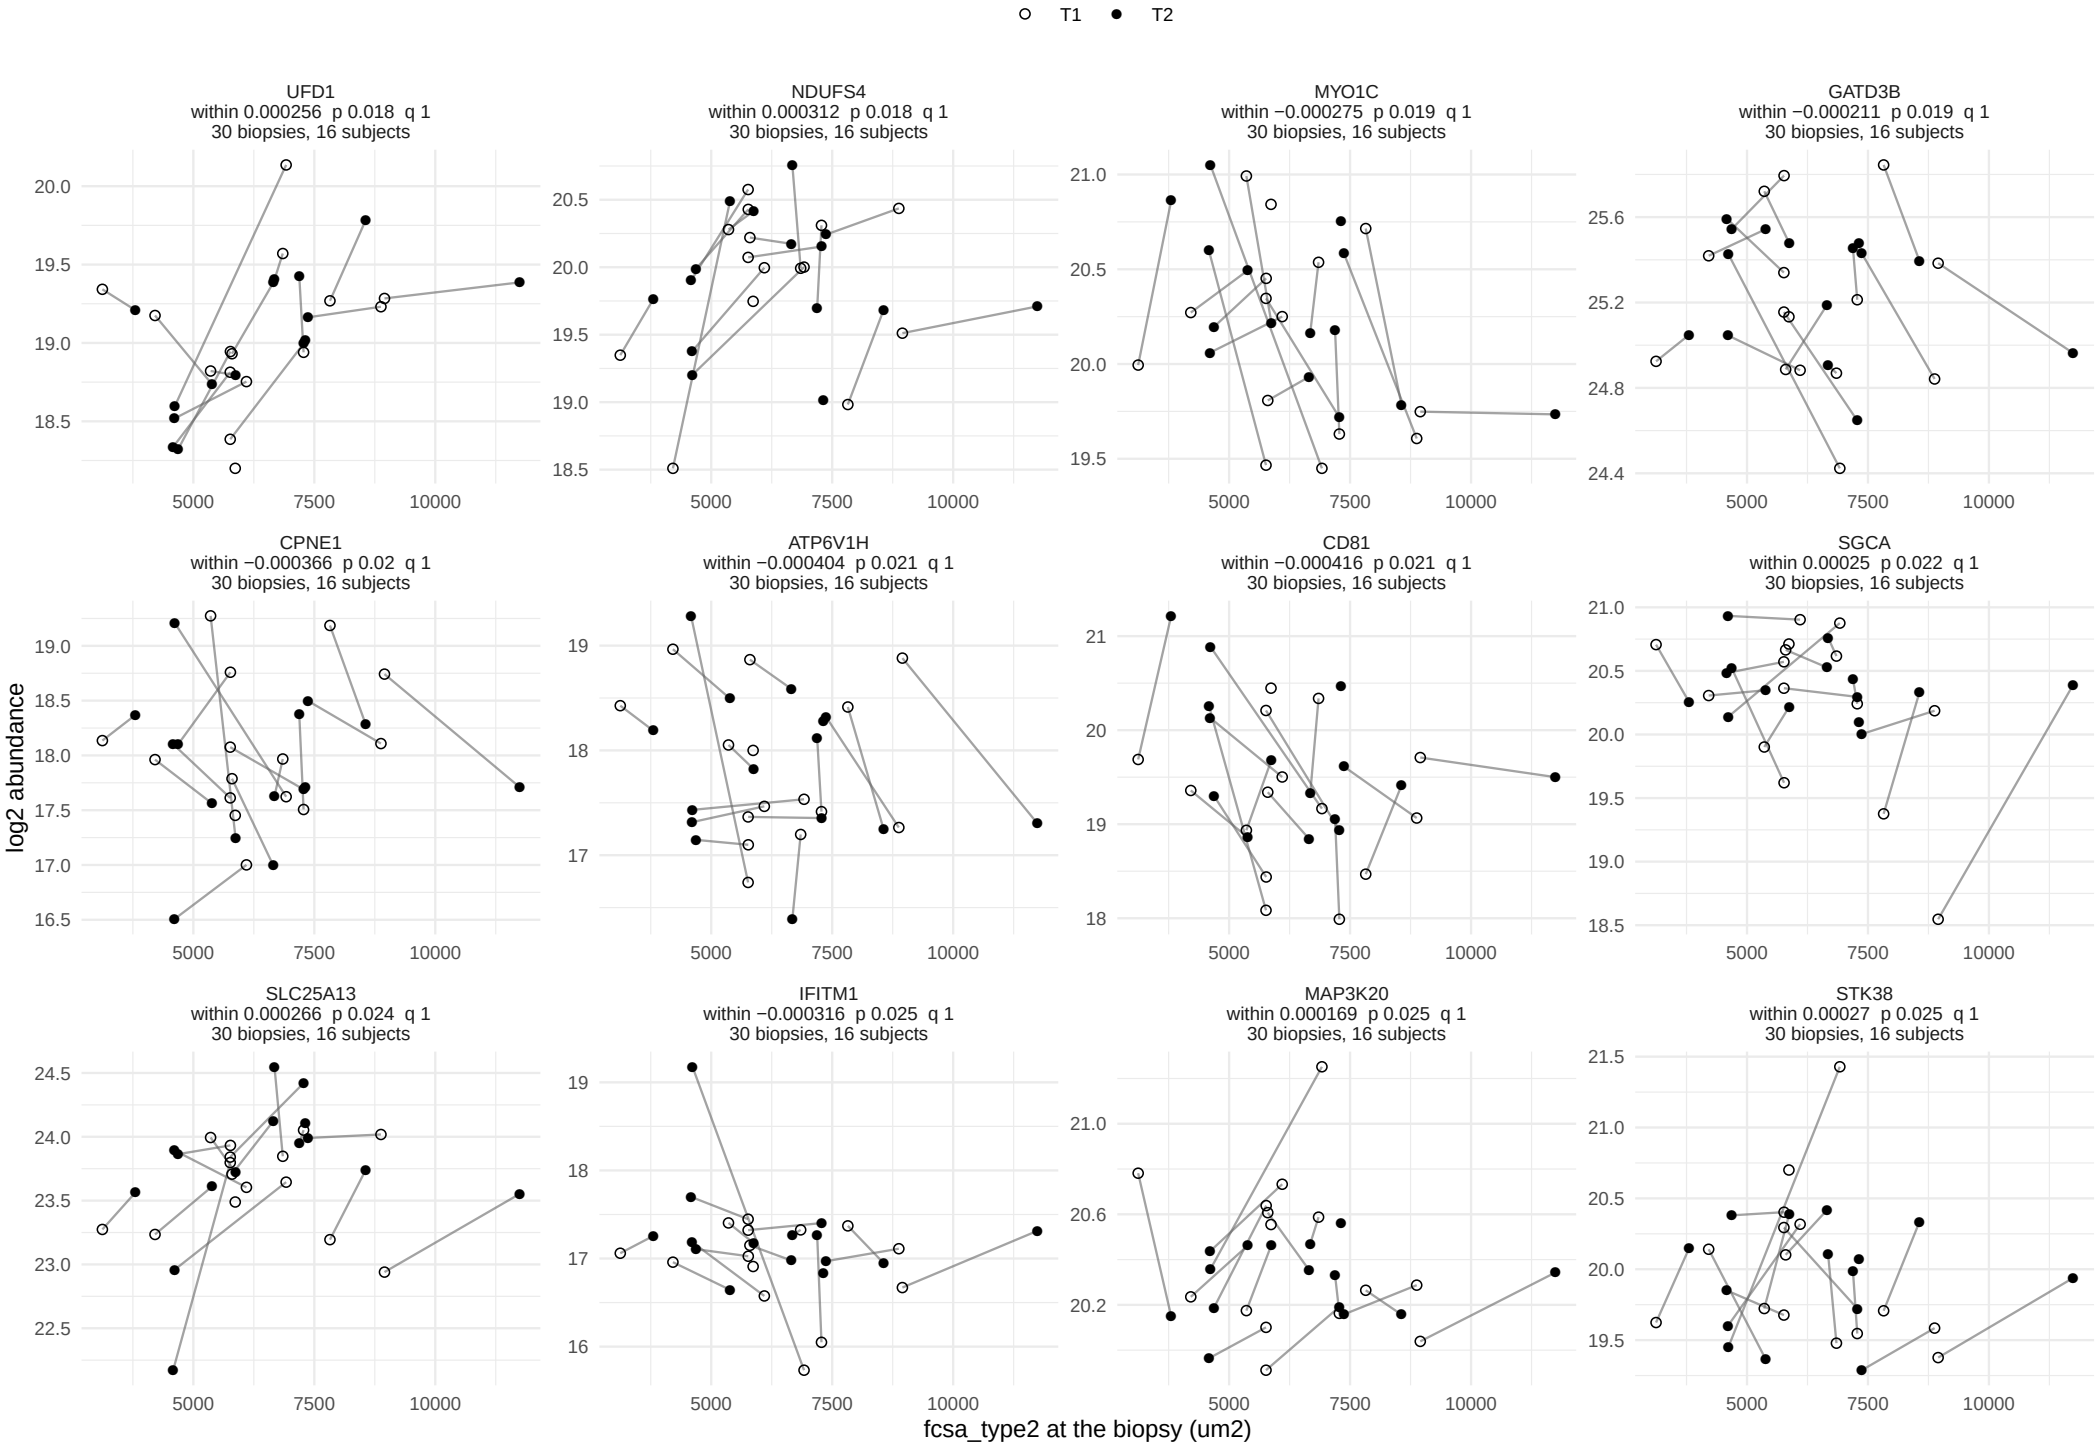

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

fcsa_type2, within−person term


76 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 4 of 7.

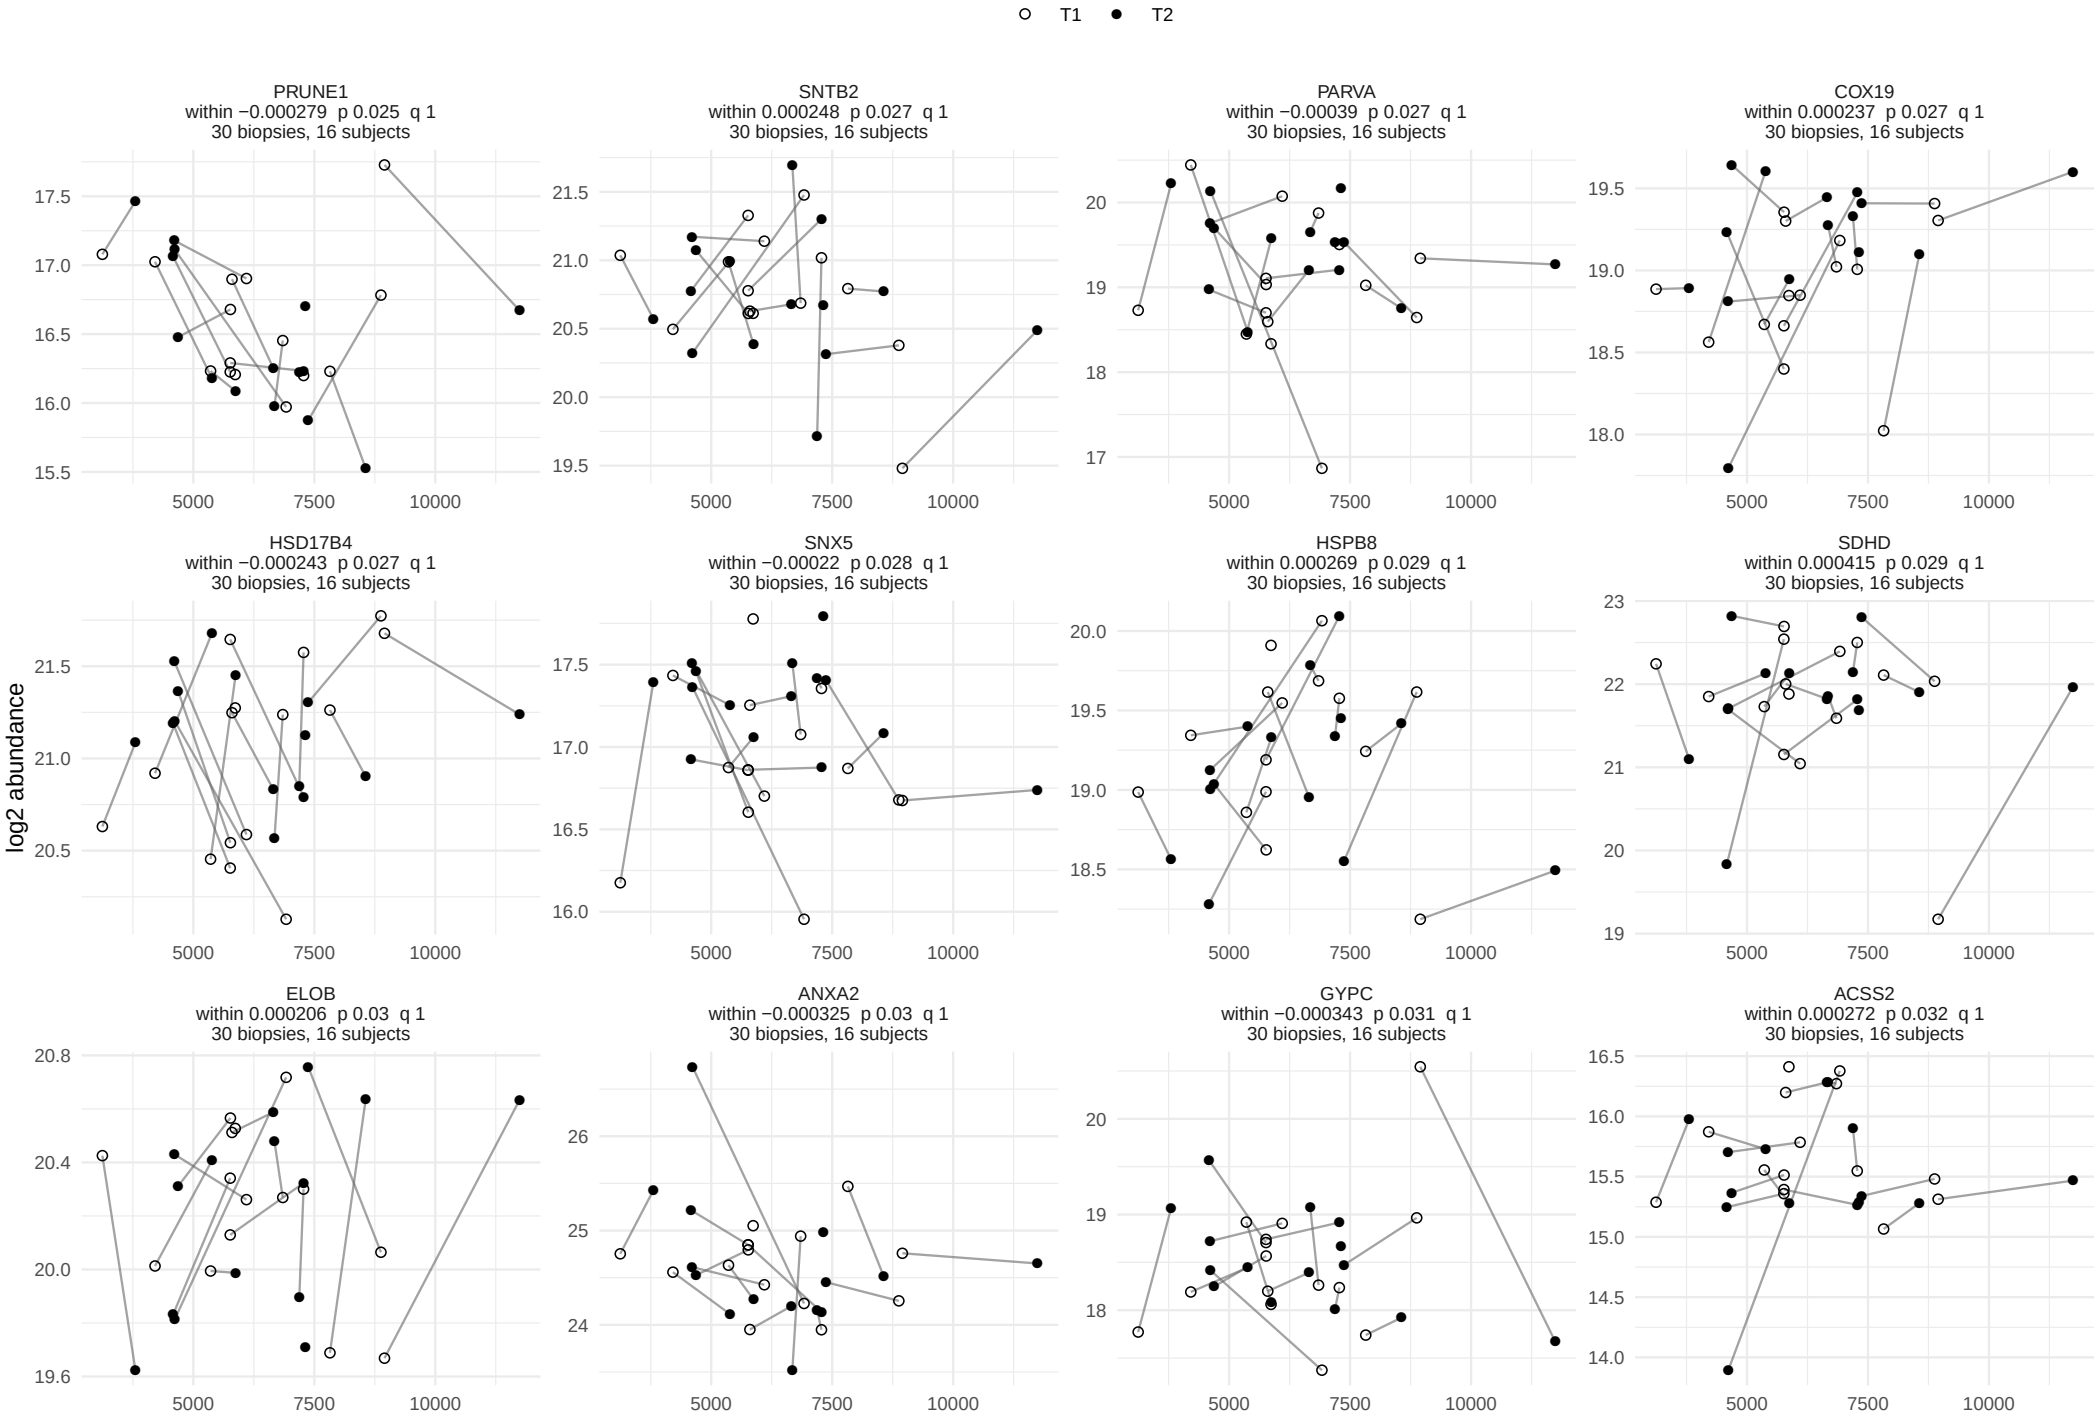

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

fcsa_type2, within−person term


76 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 5 of 7.

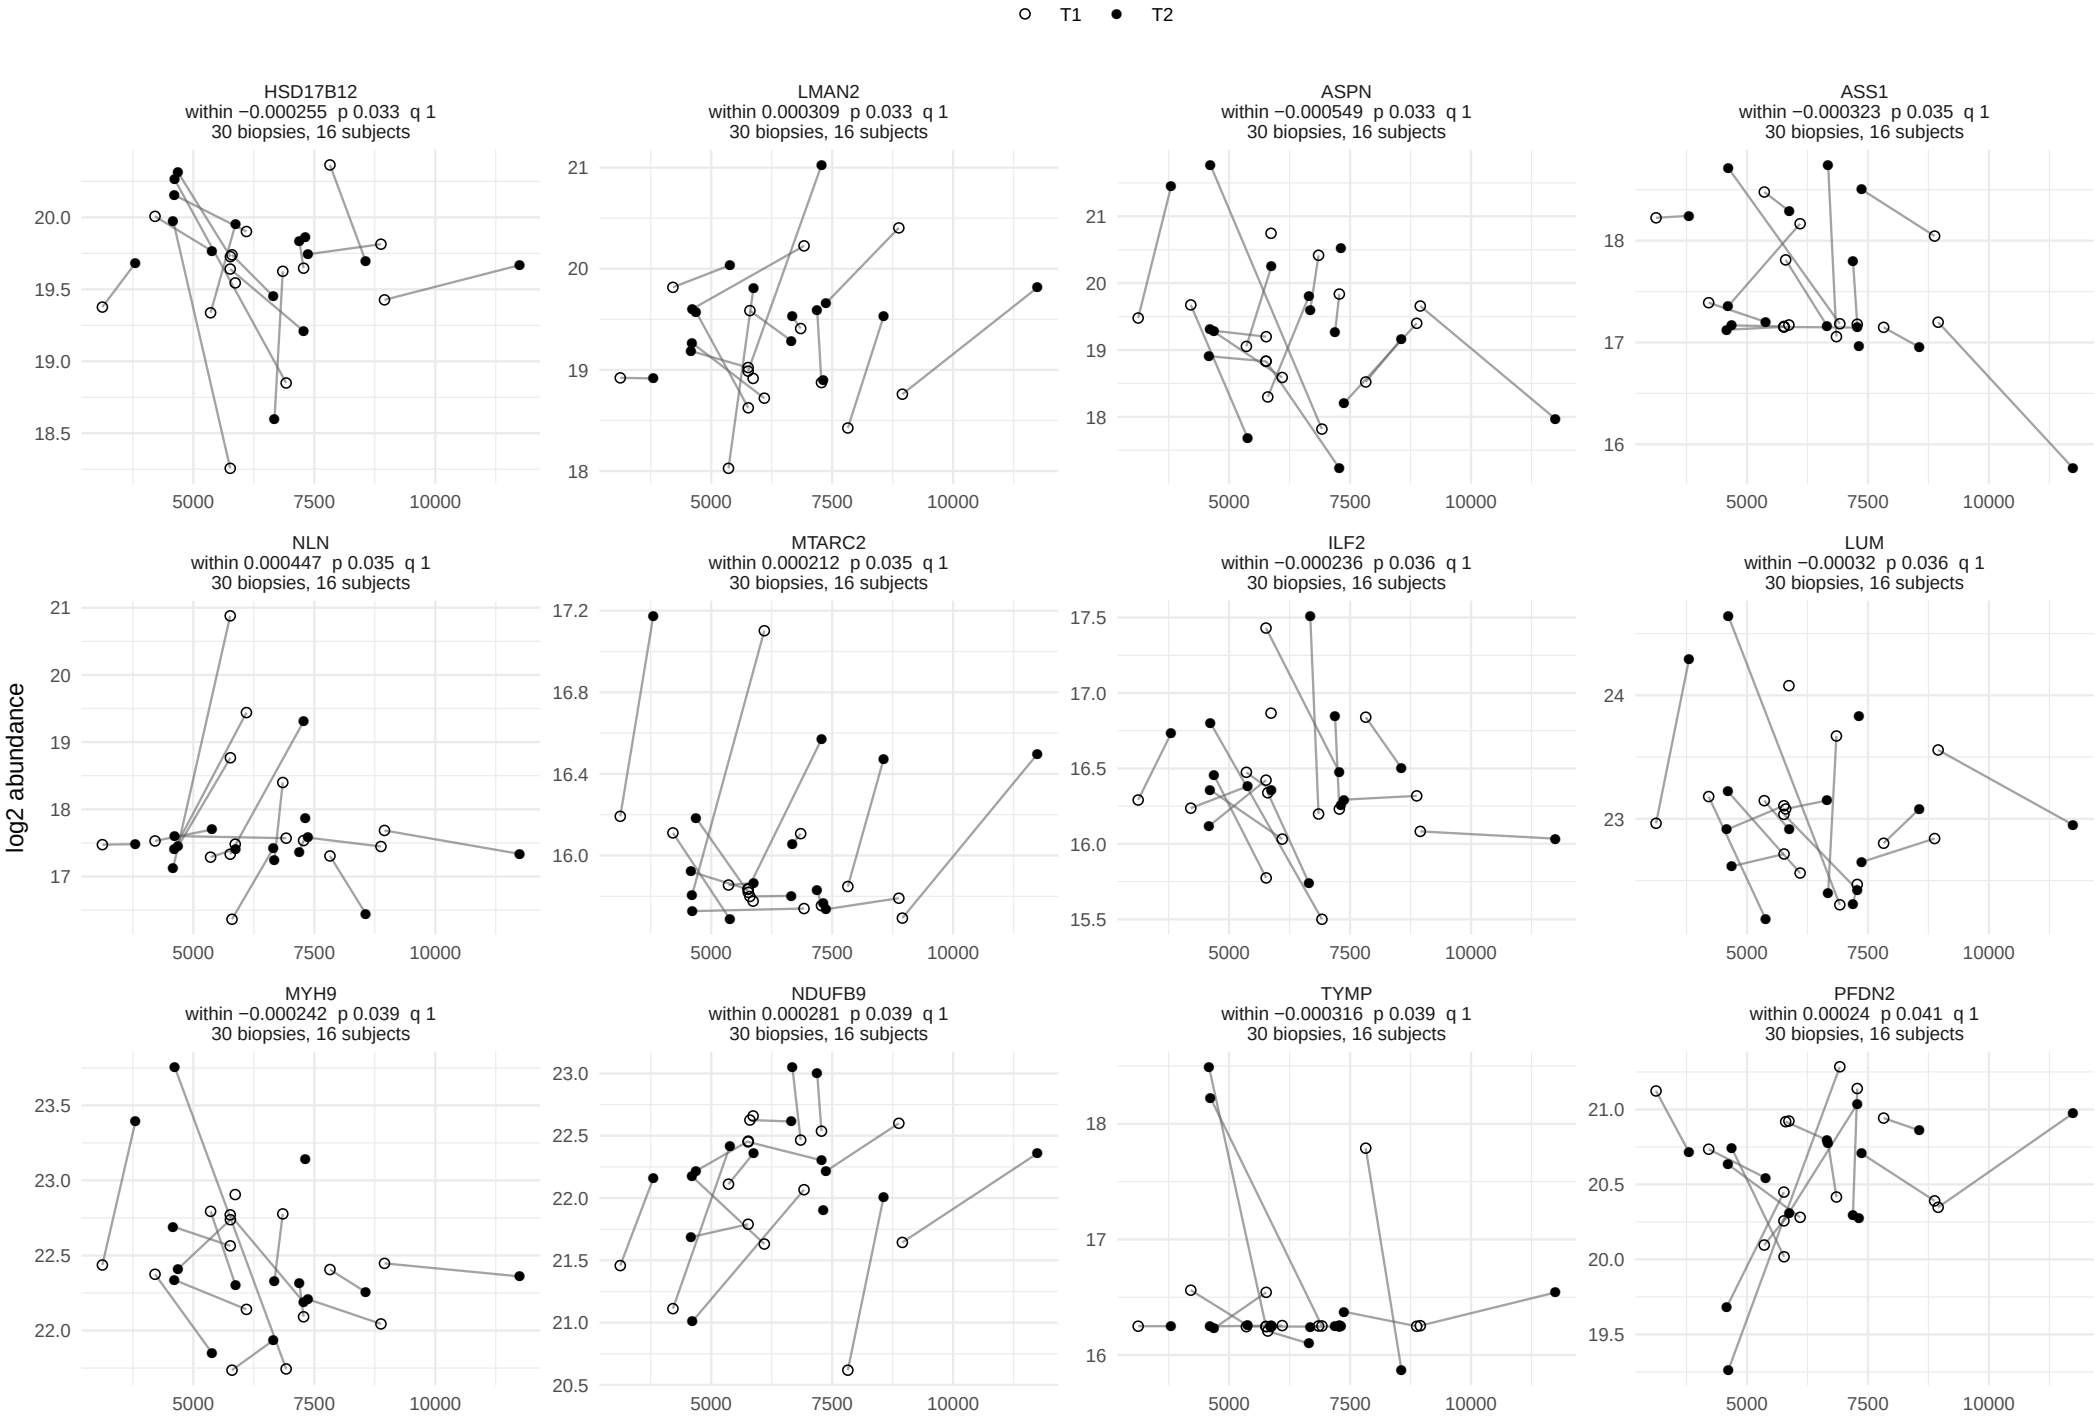

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

fcsa_type2, within−person term


76 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 6 of 7.

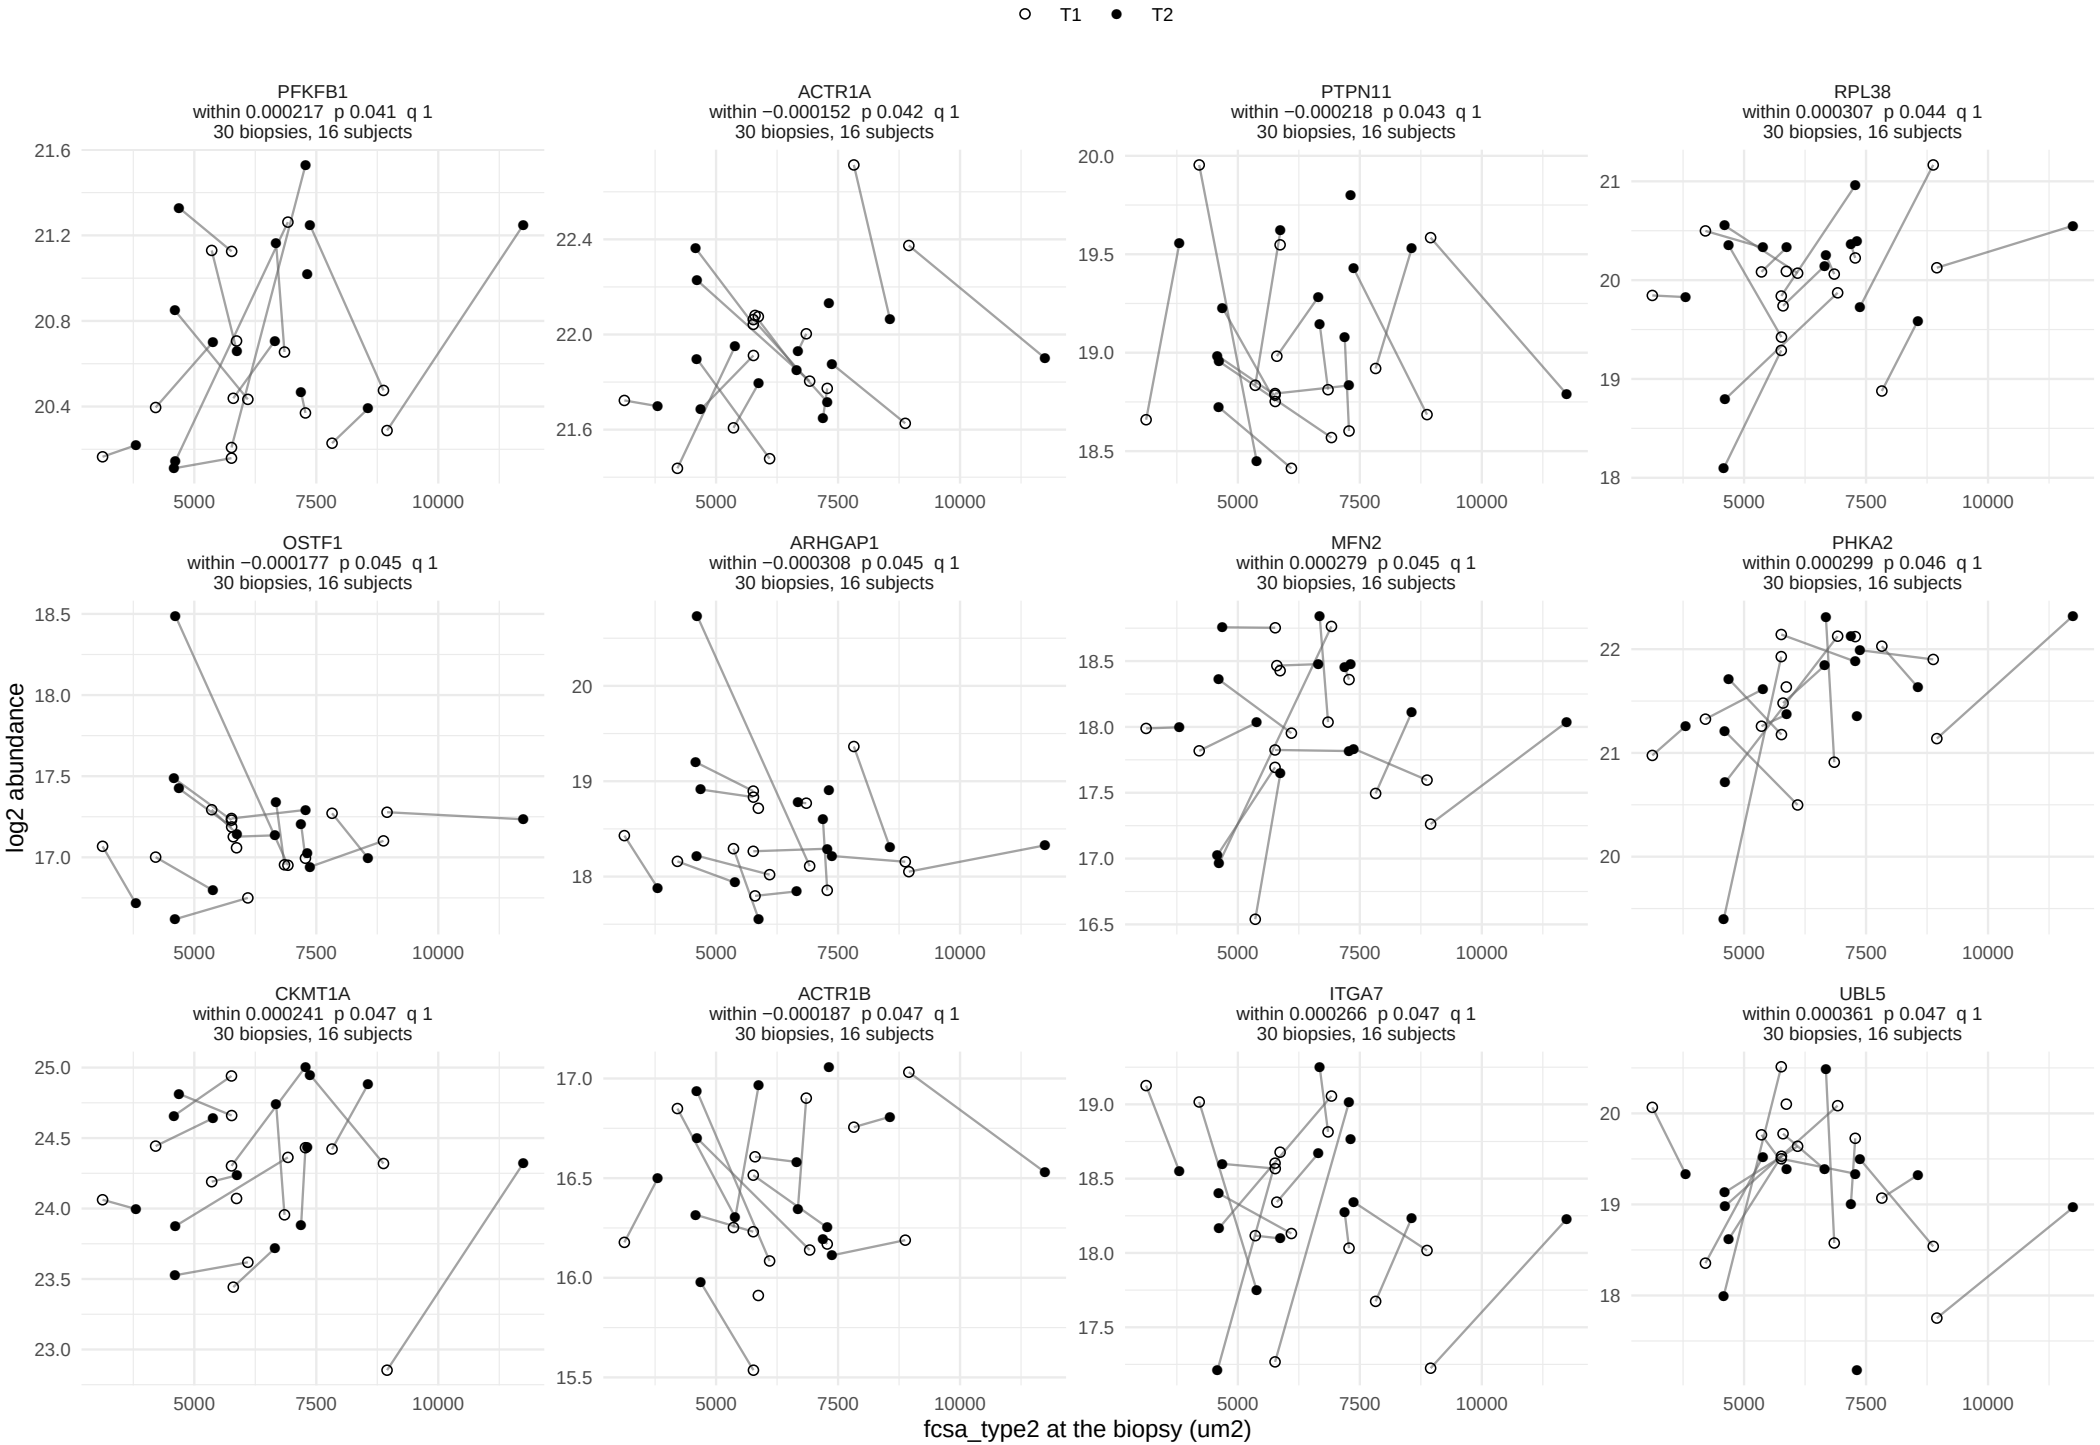

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

fcsa_type2, within−person term


76 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 7 of 7.

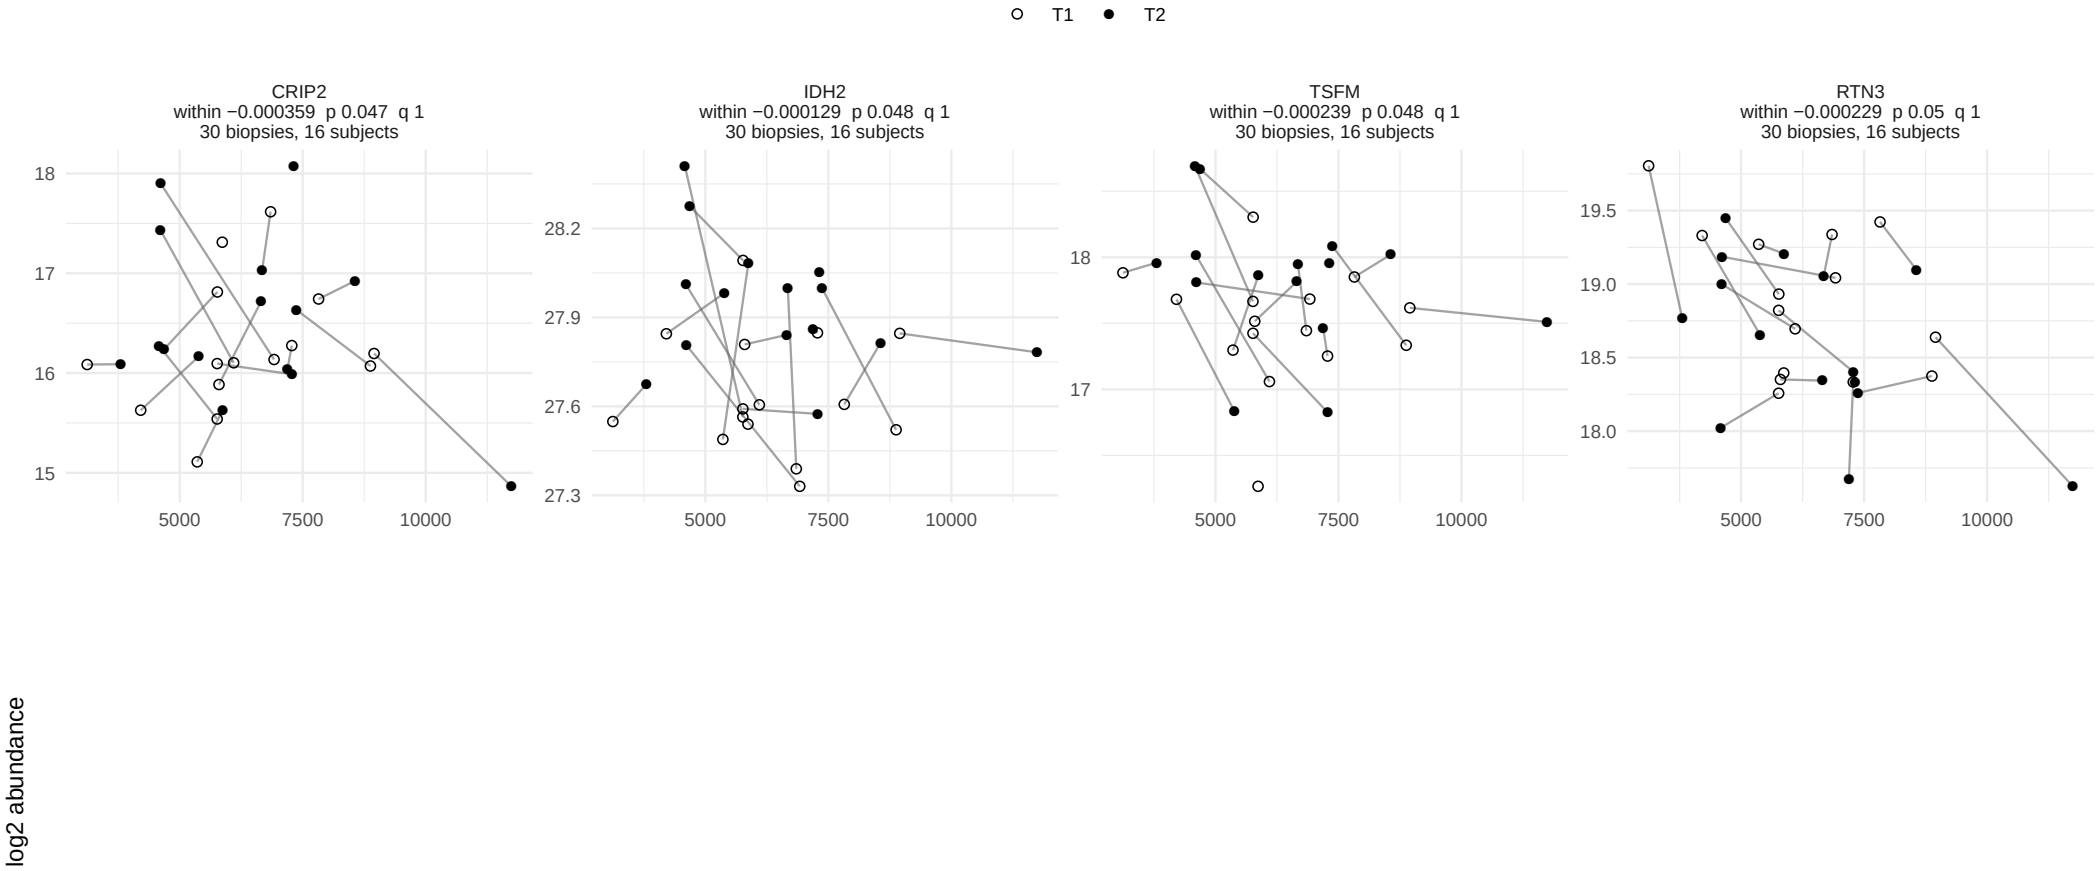

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

fcsa_type2, between−person term


86 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 1 of 8.

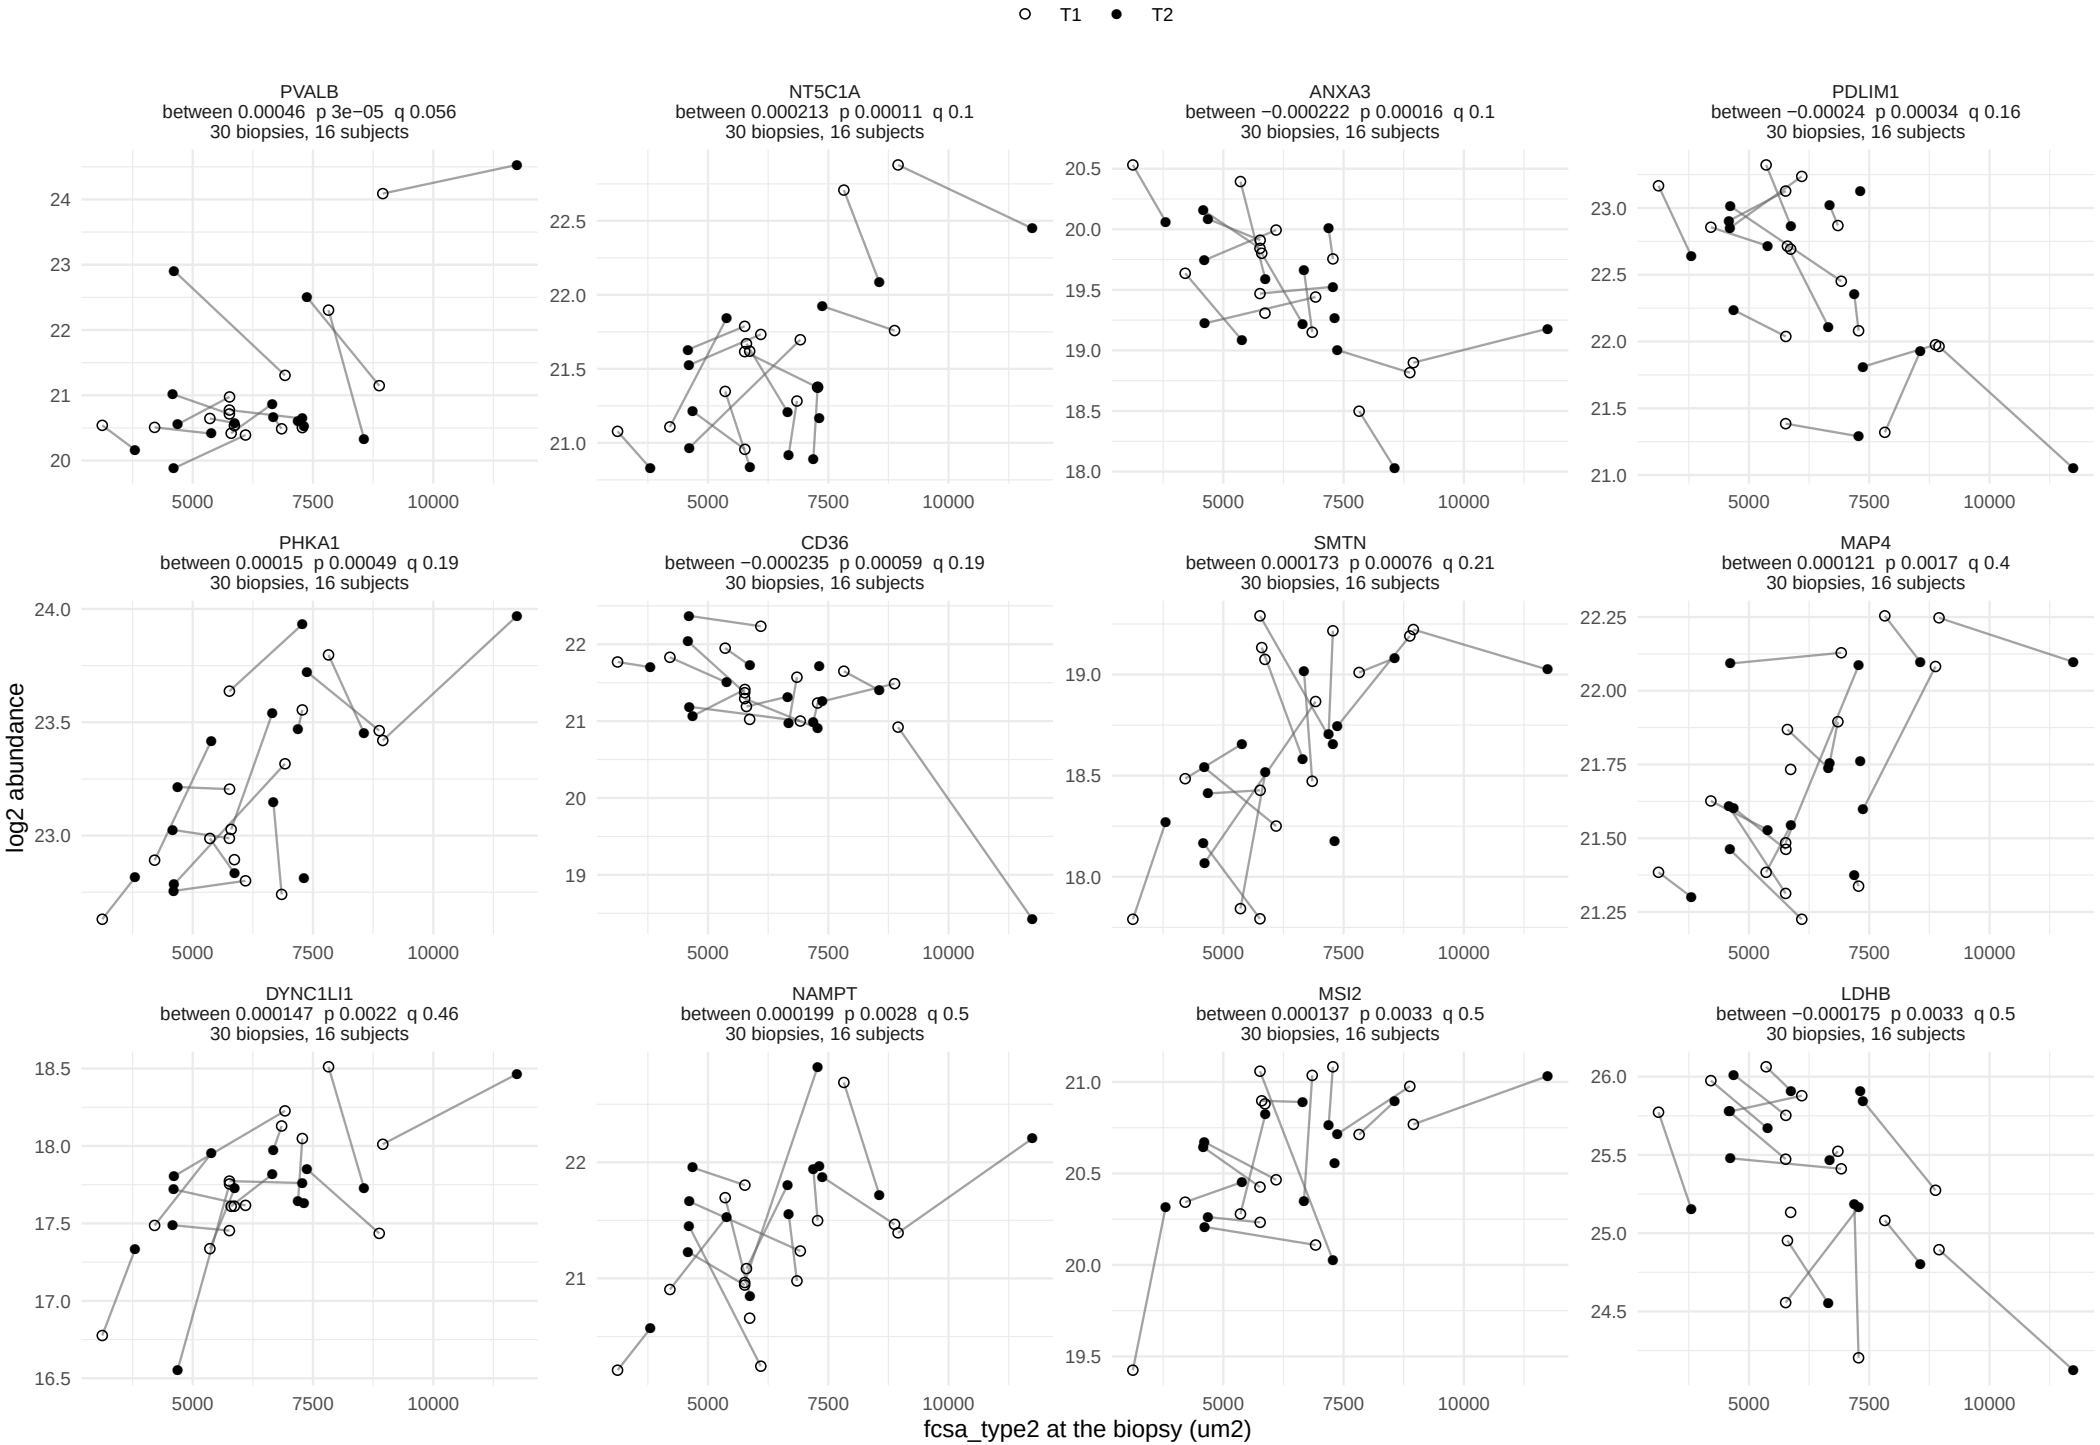

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

fcsa_type2, between−person term


86 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 2 of 8.

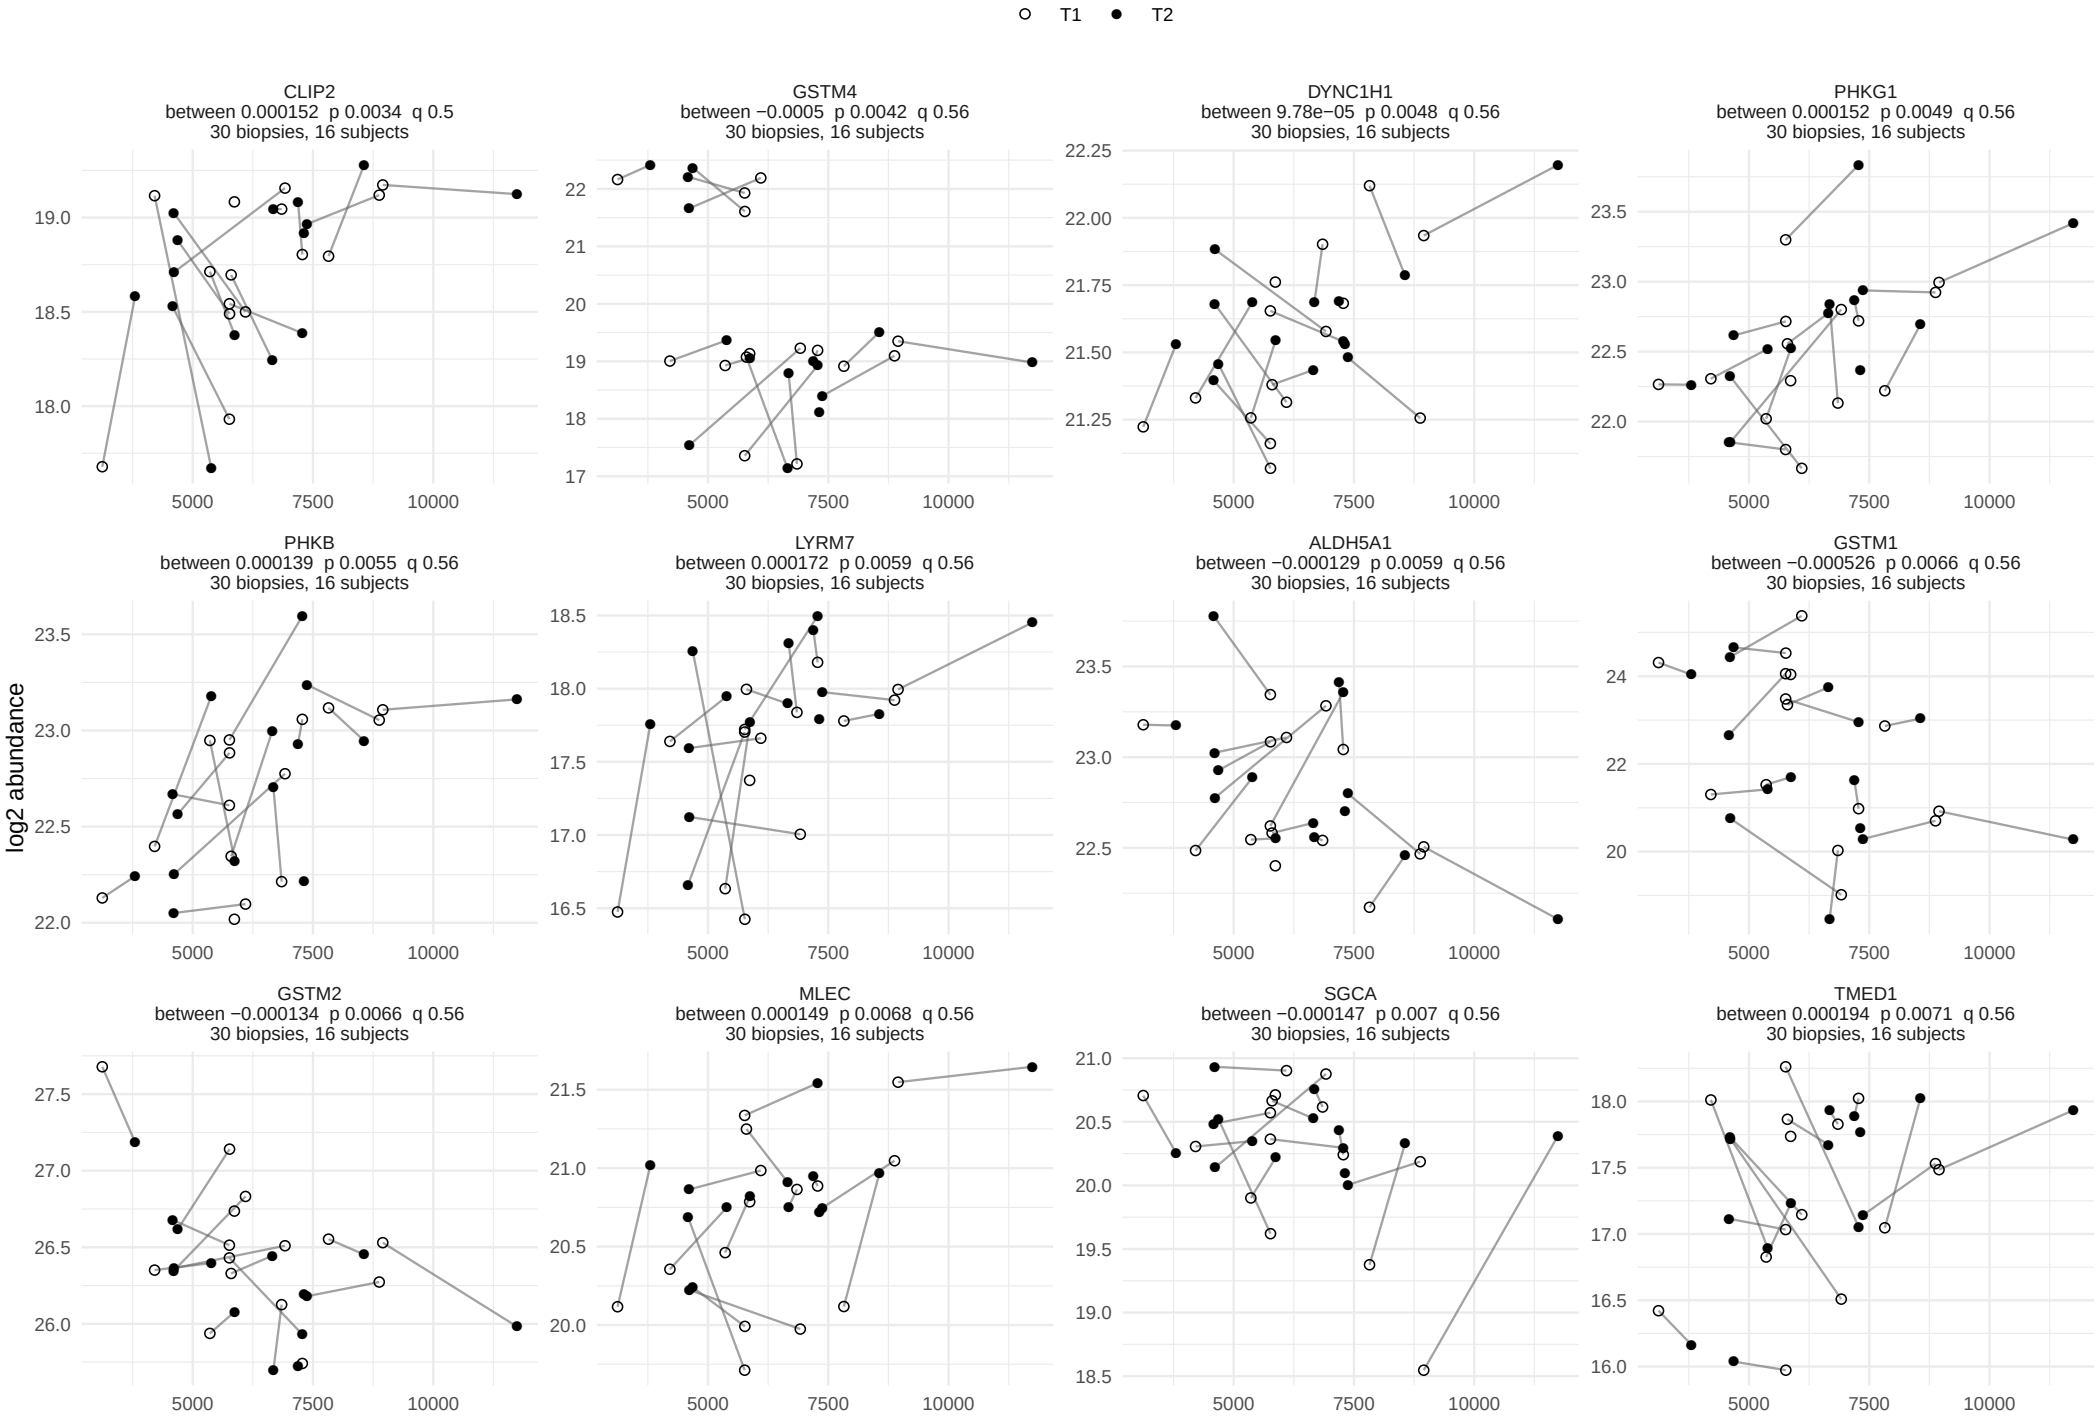

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

fcsa_type2, between−person term


86 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 3 of 8.

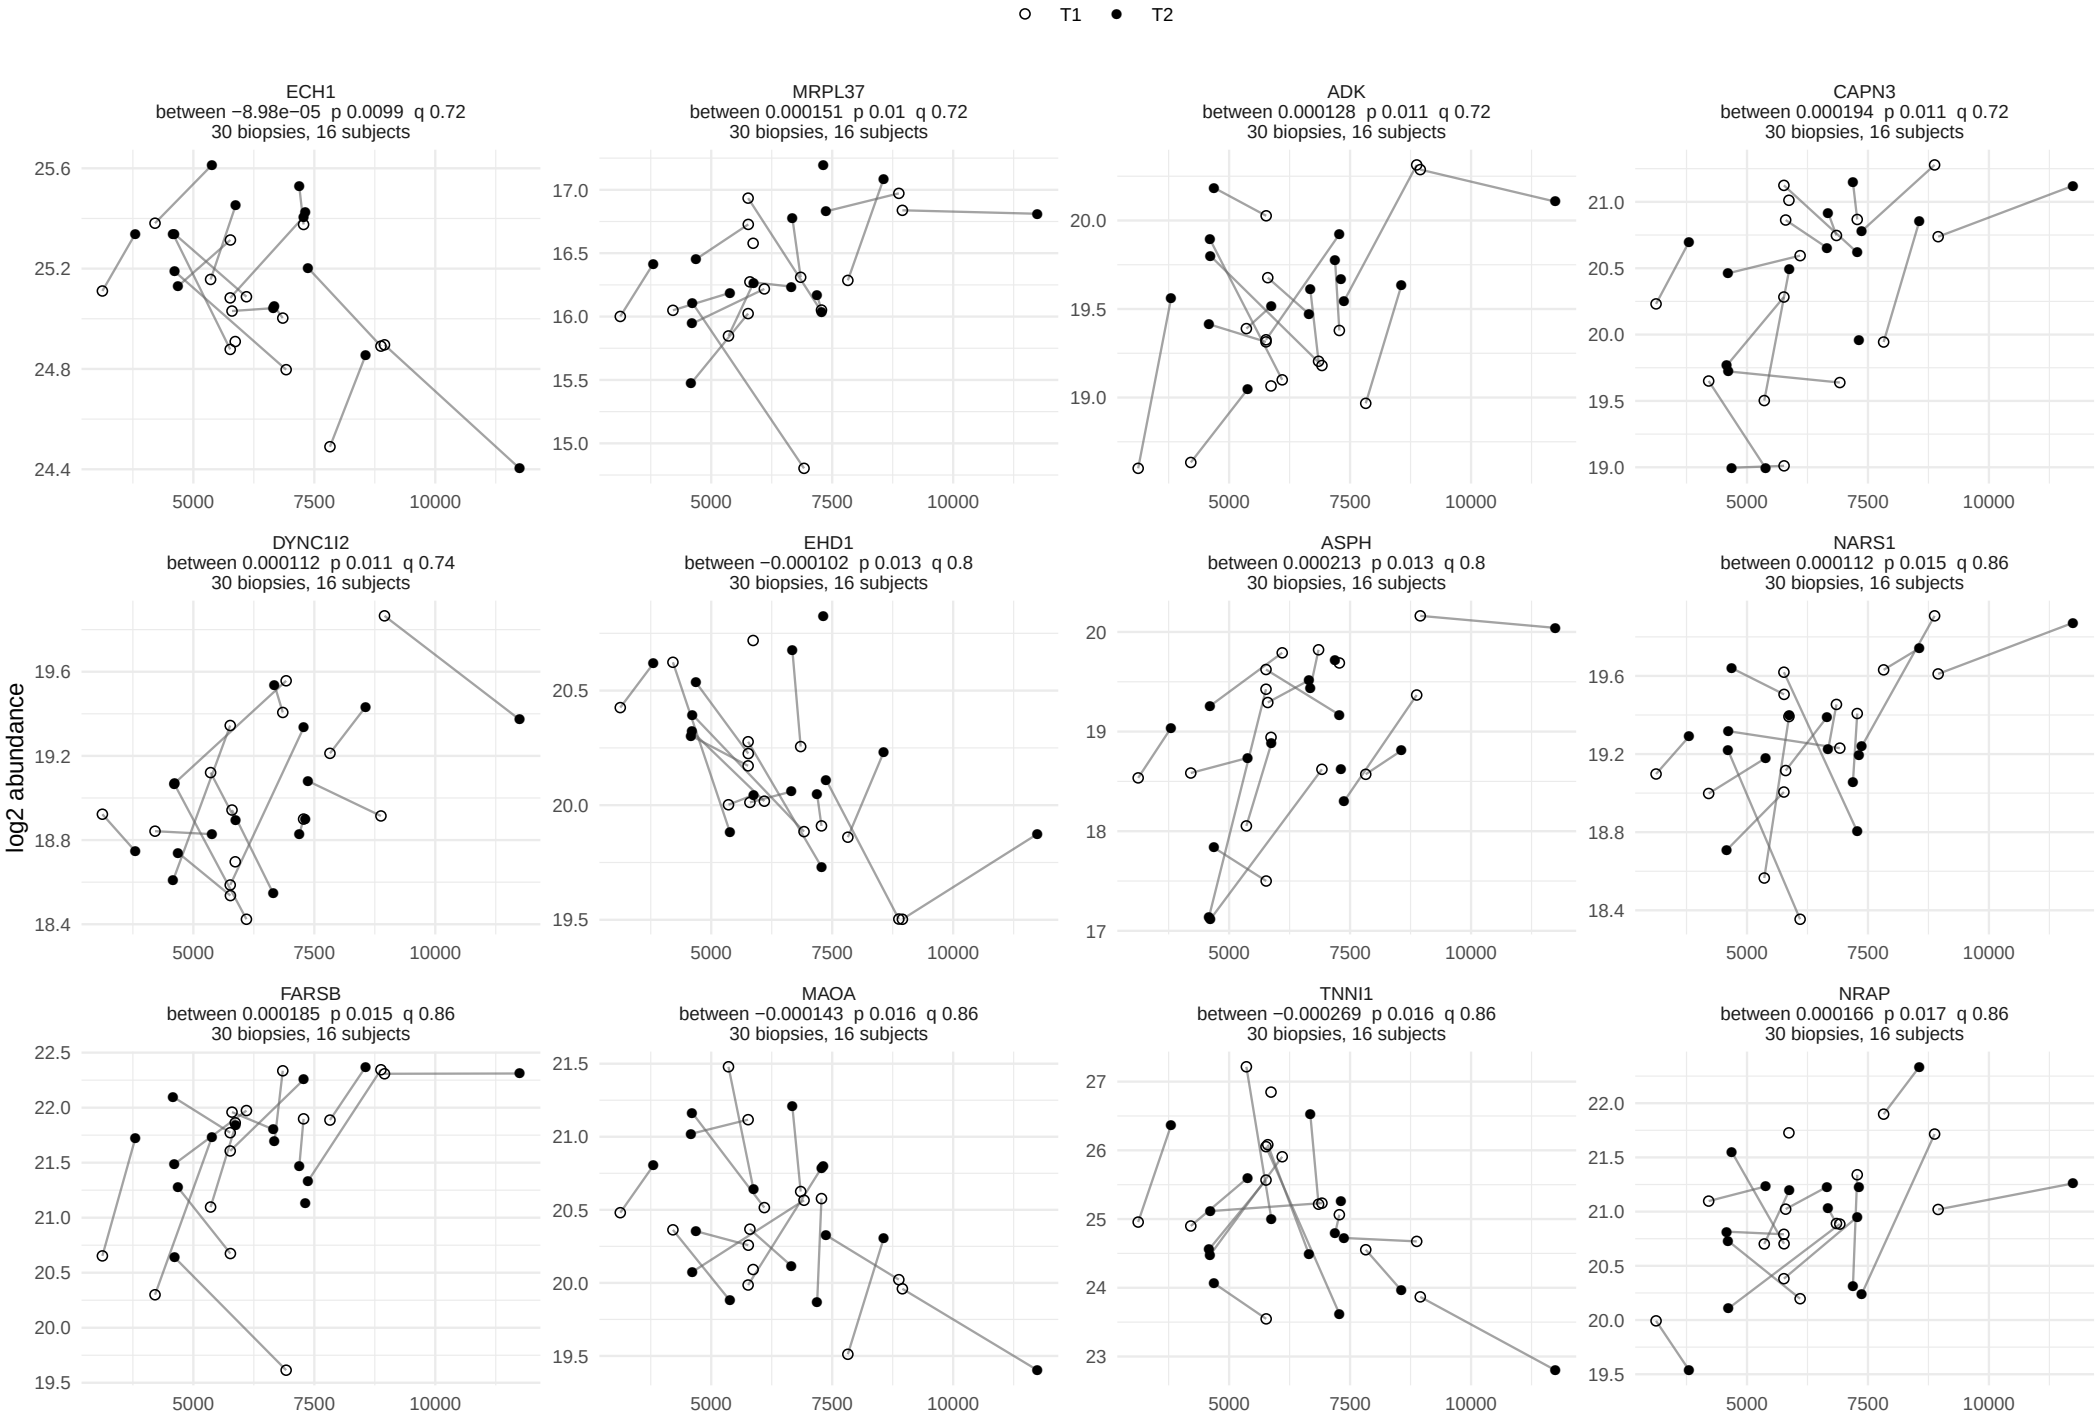

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

fcsa_type2, between−person term


86 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 4 of 8.

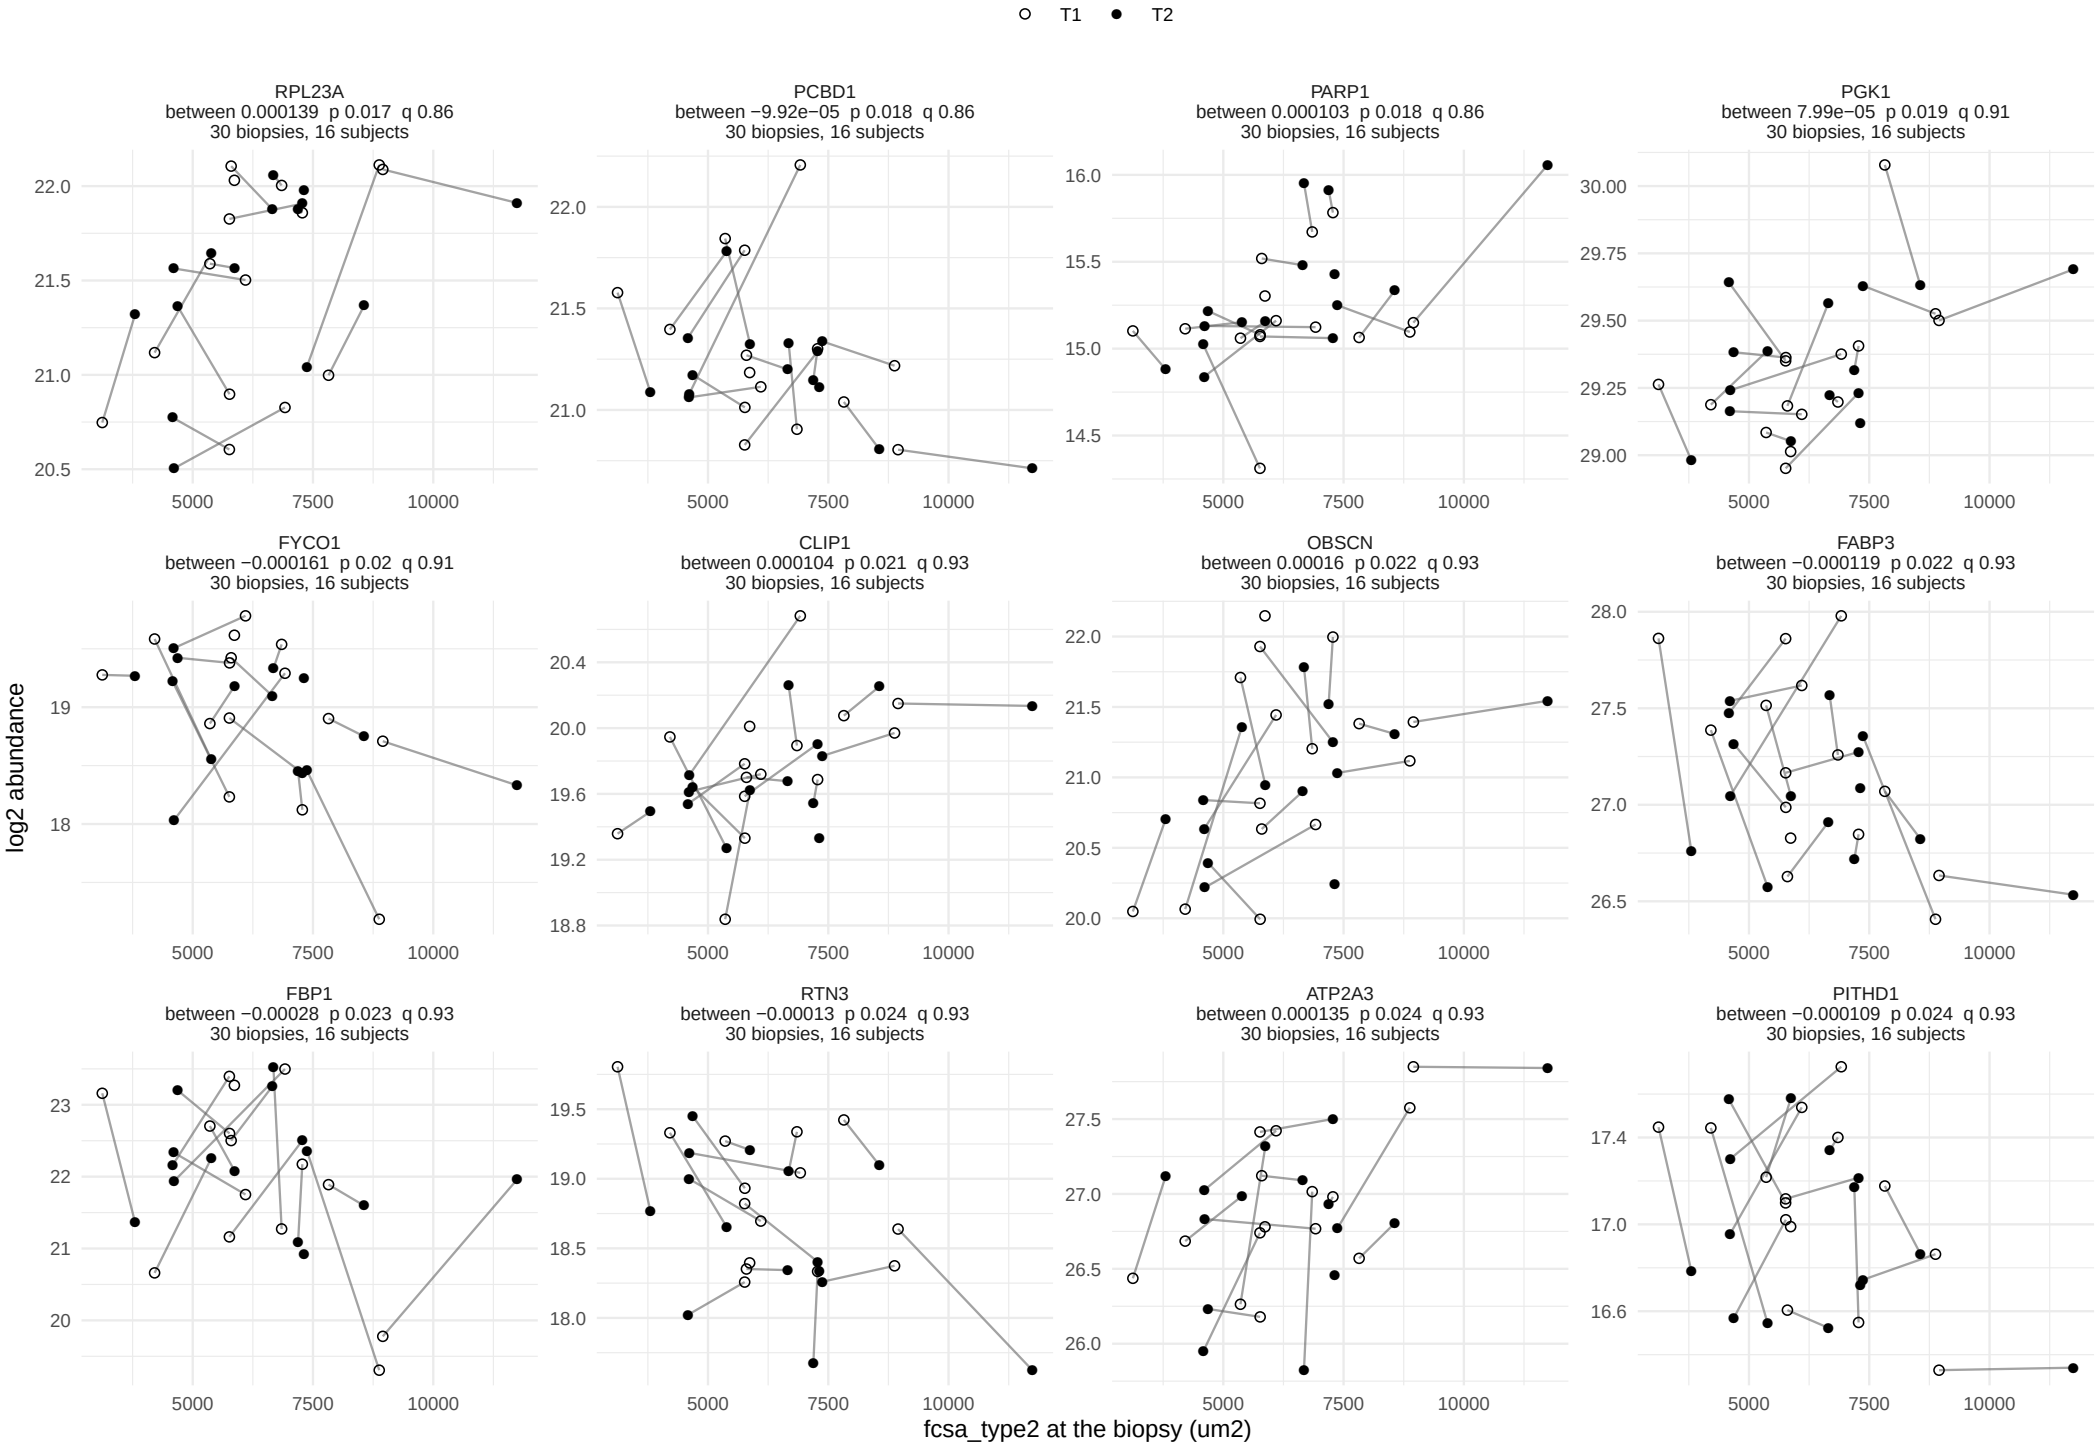

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

fcsa_type2, between−person term


86 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 5 of 8.

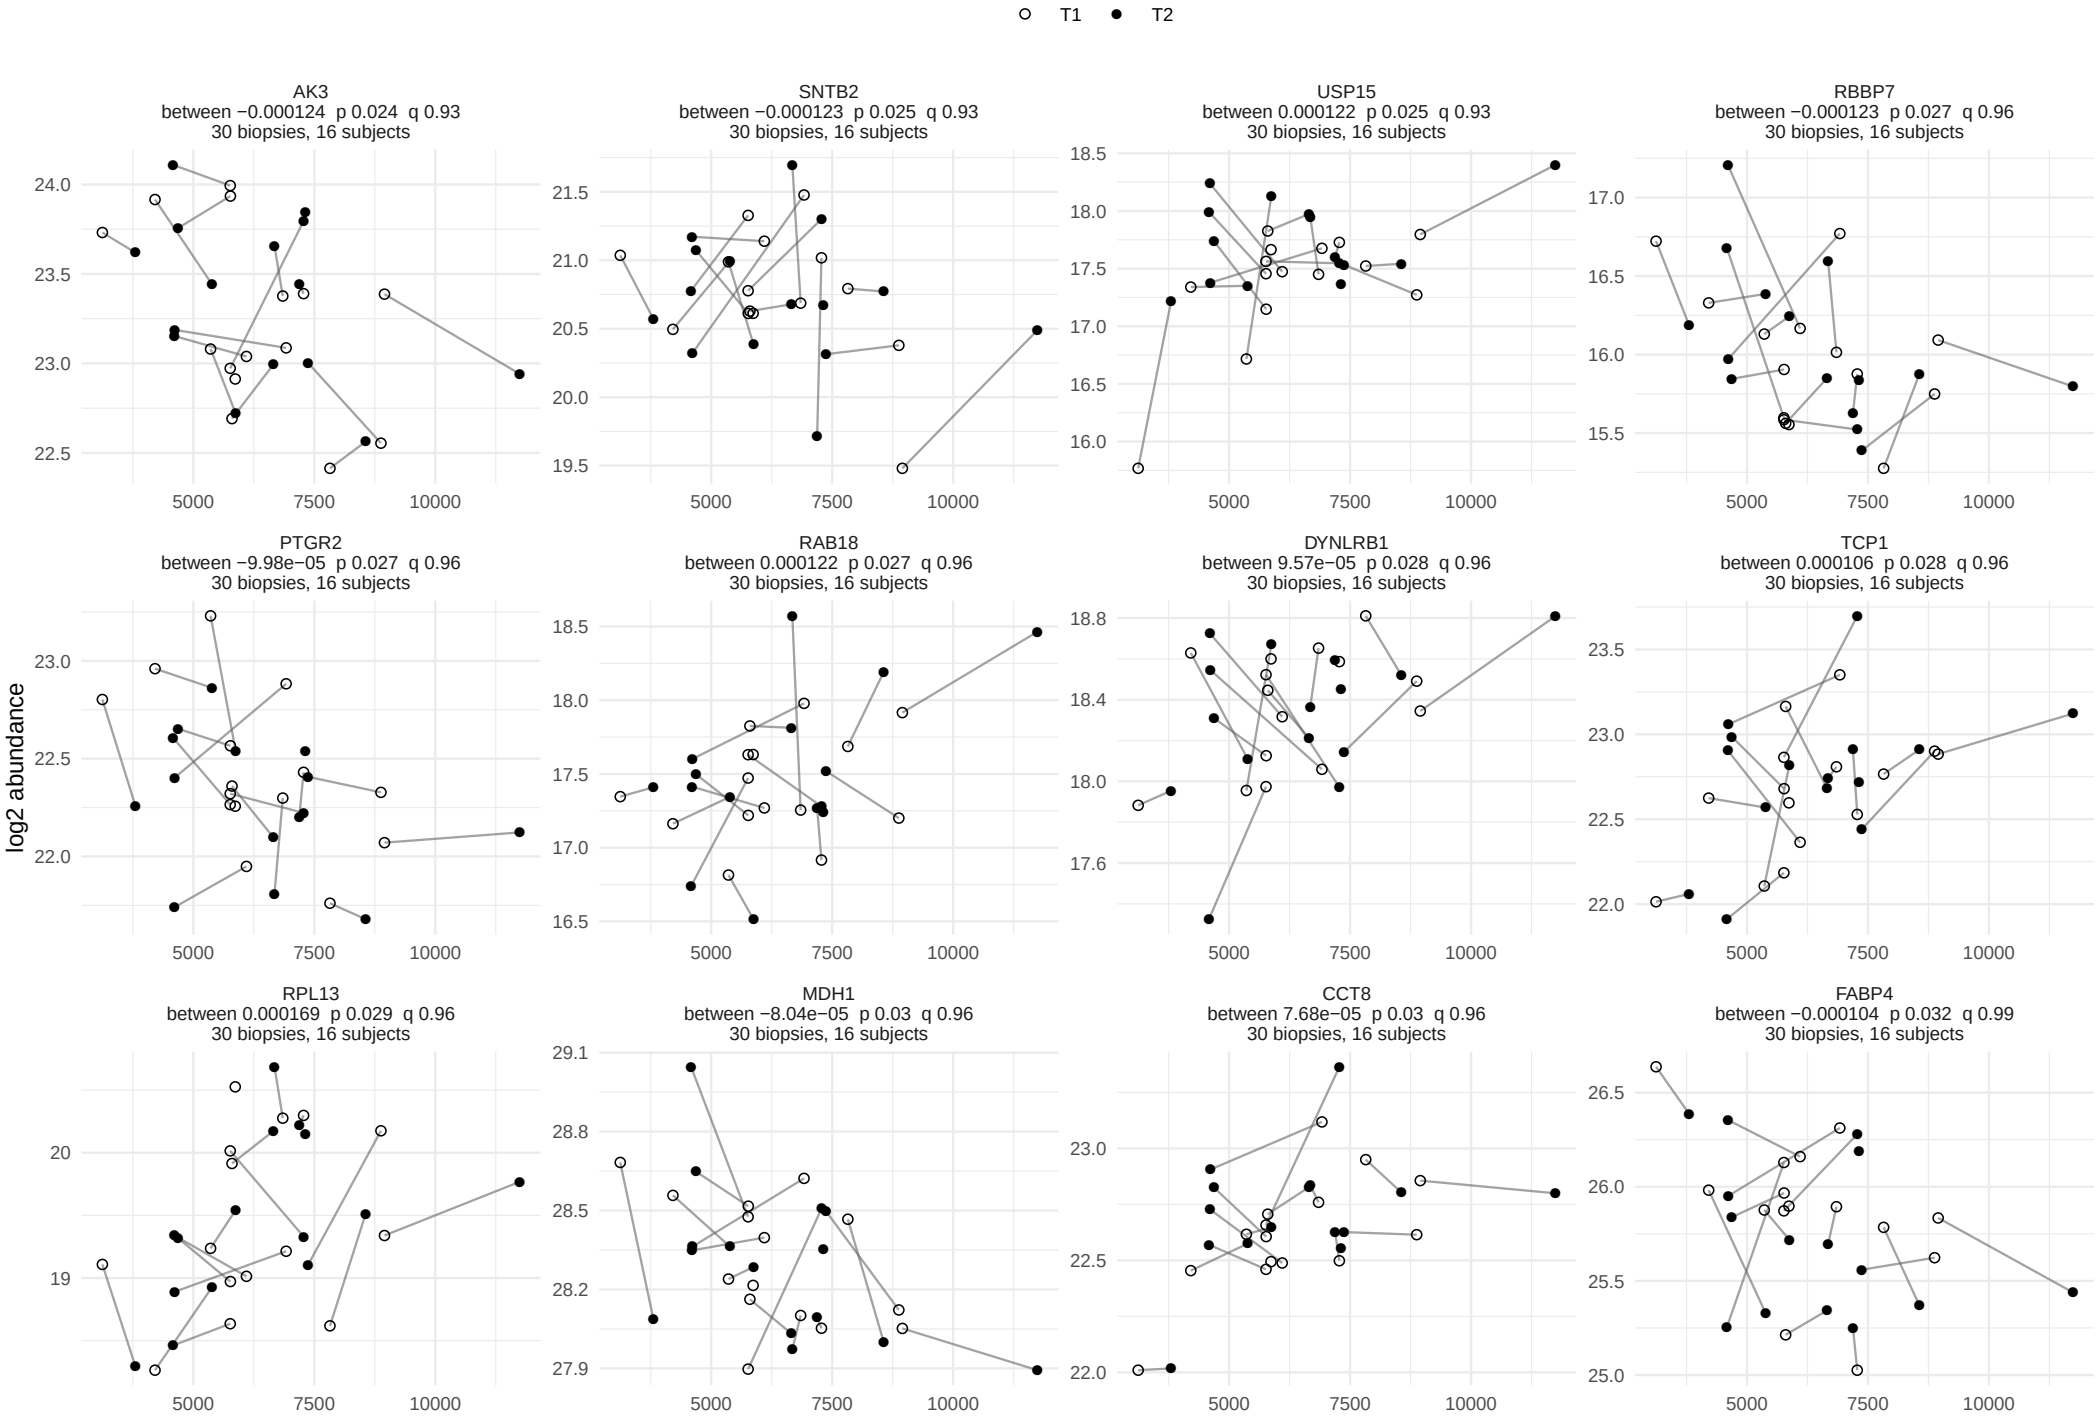

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

fcsa_type2, between−person term


86 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 6 of 8.

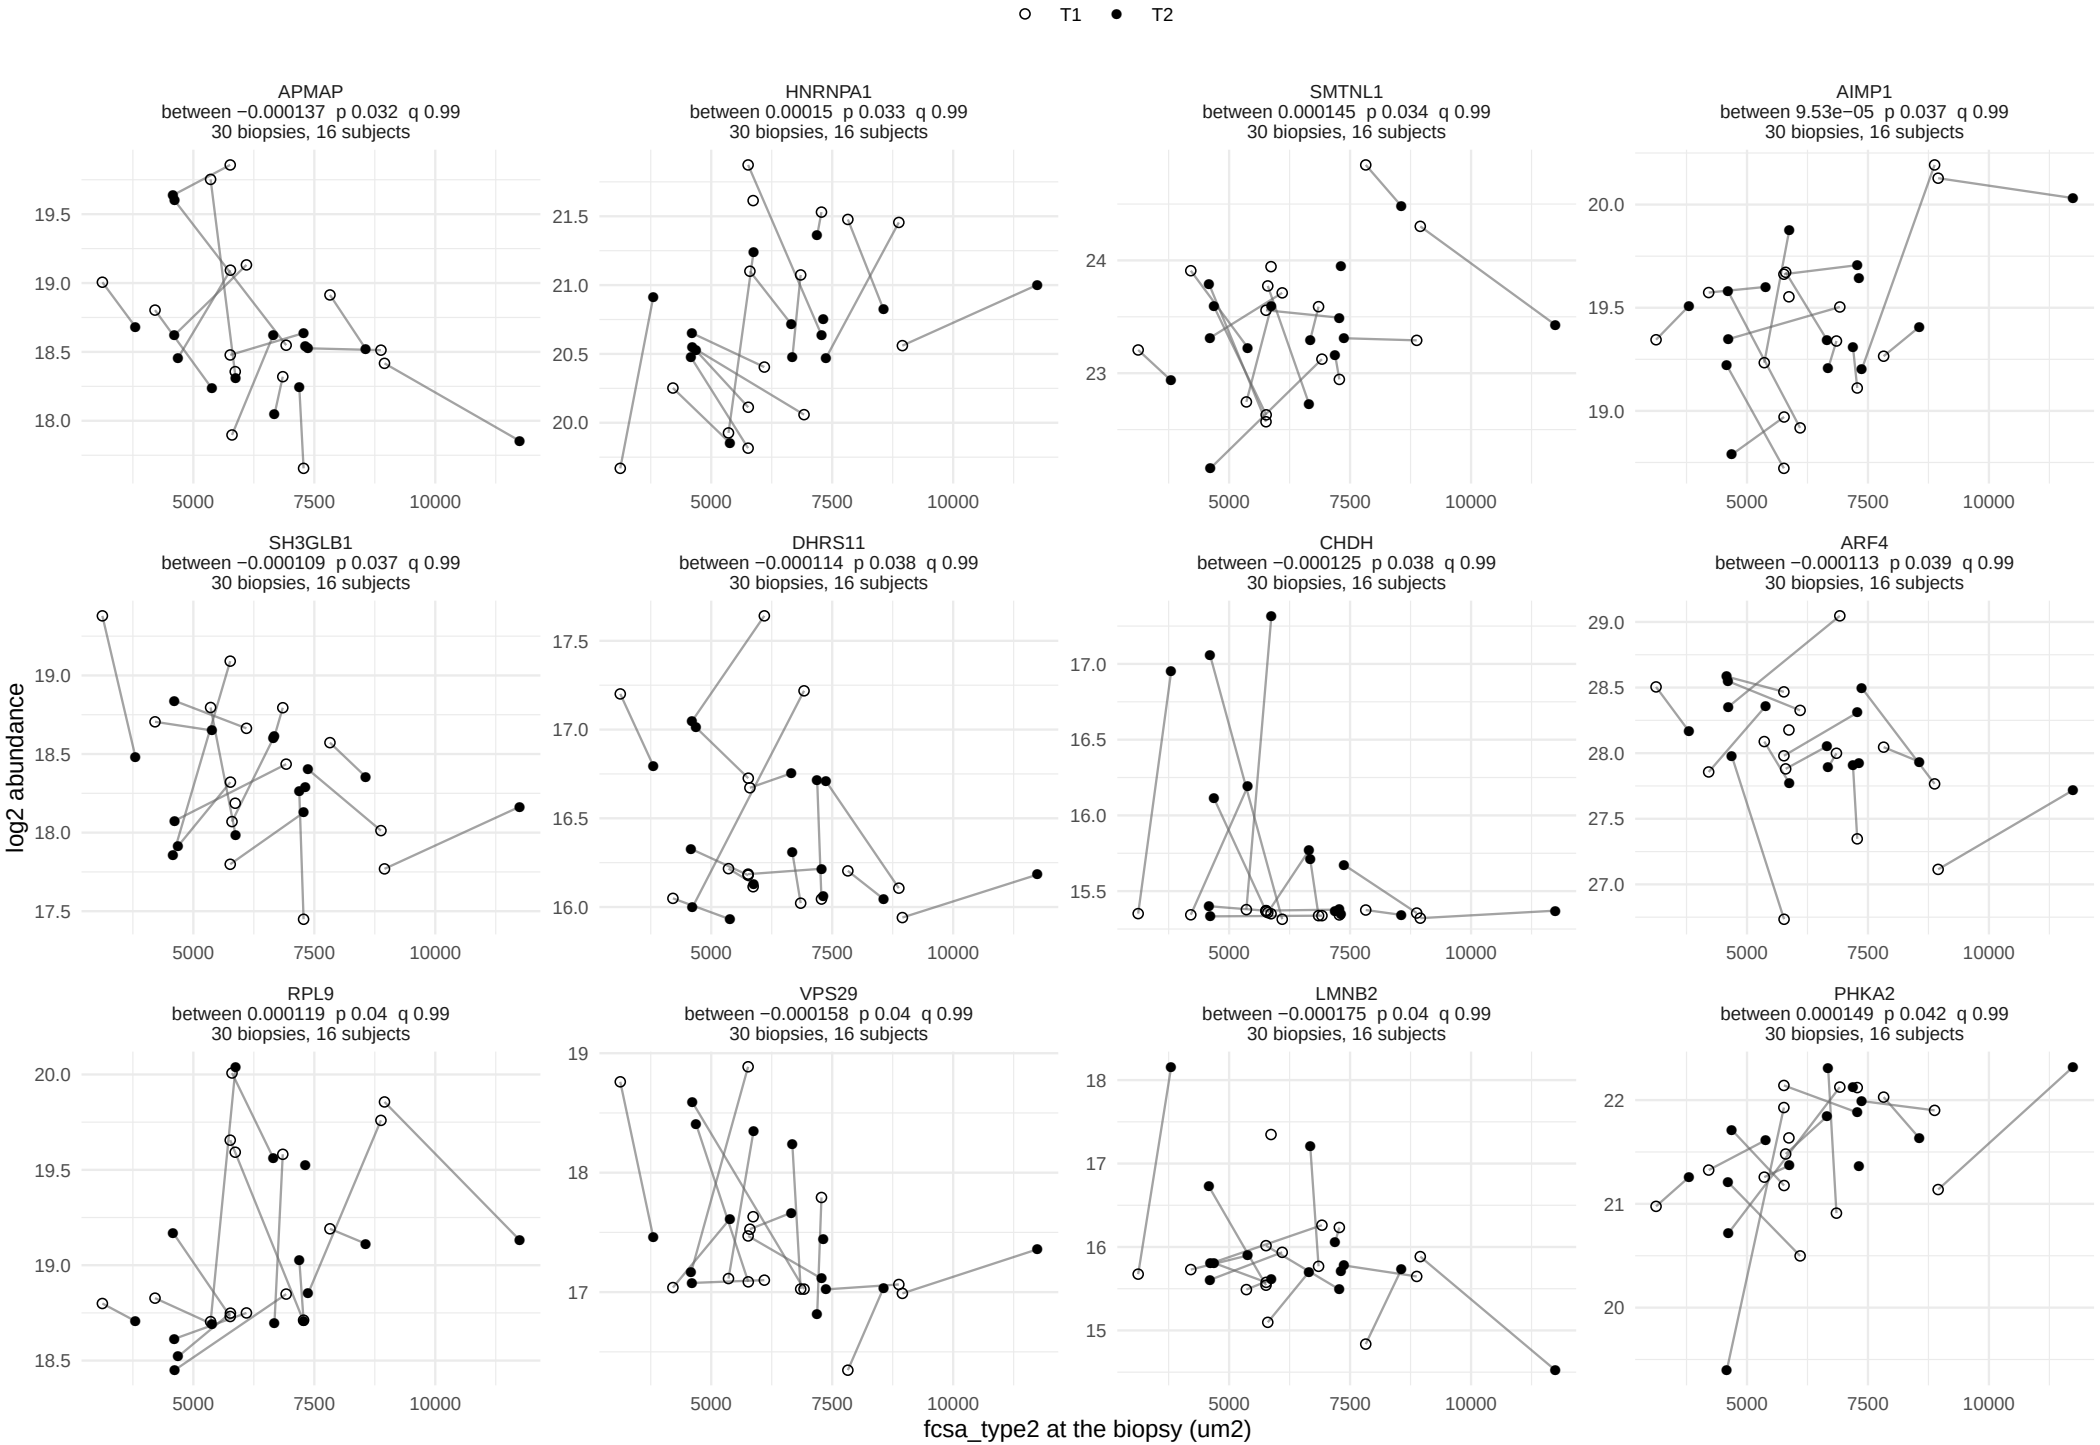

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

fcsa_type2, between−person term


86 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 7 of 8.

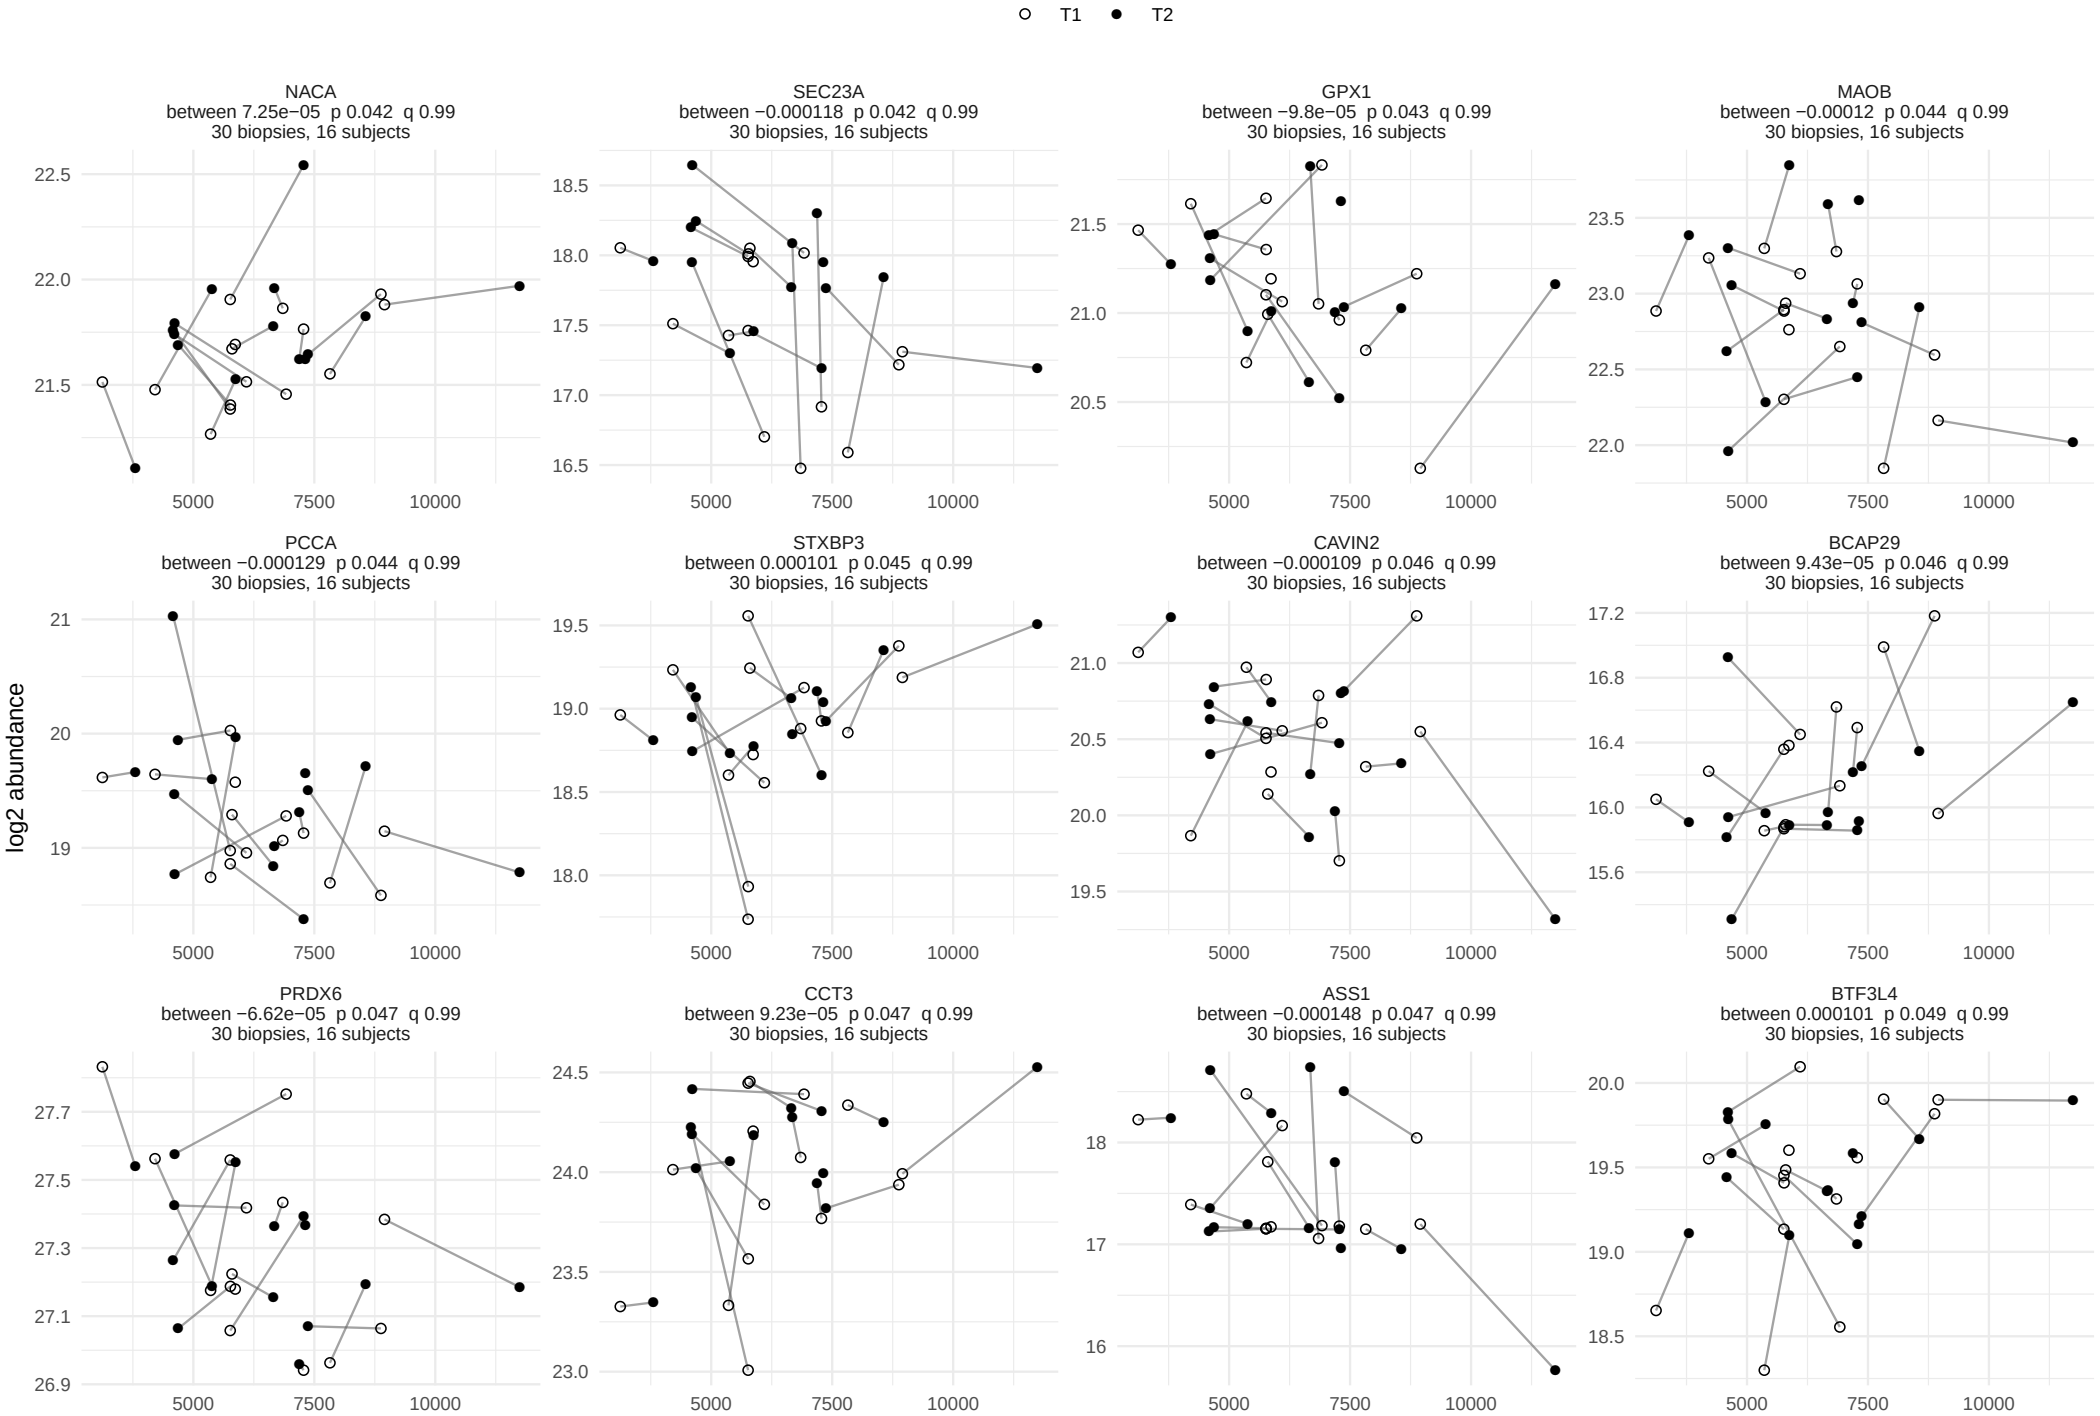

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

fcsa_type2, between−person term


86 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 8 of 8.

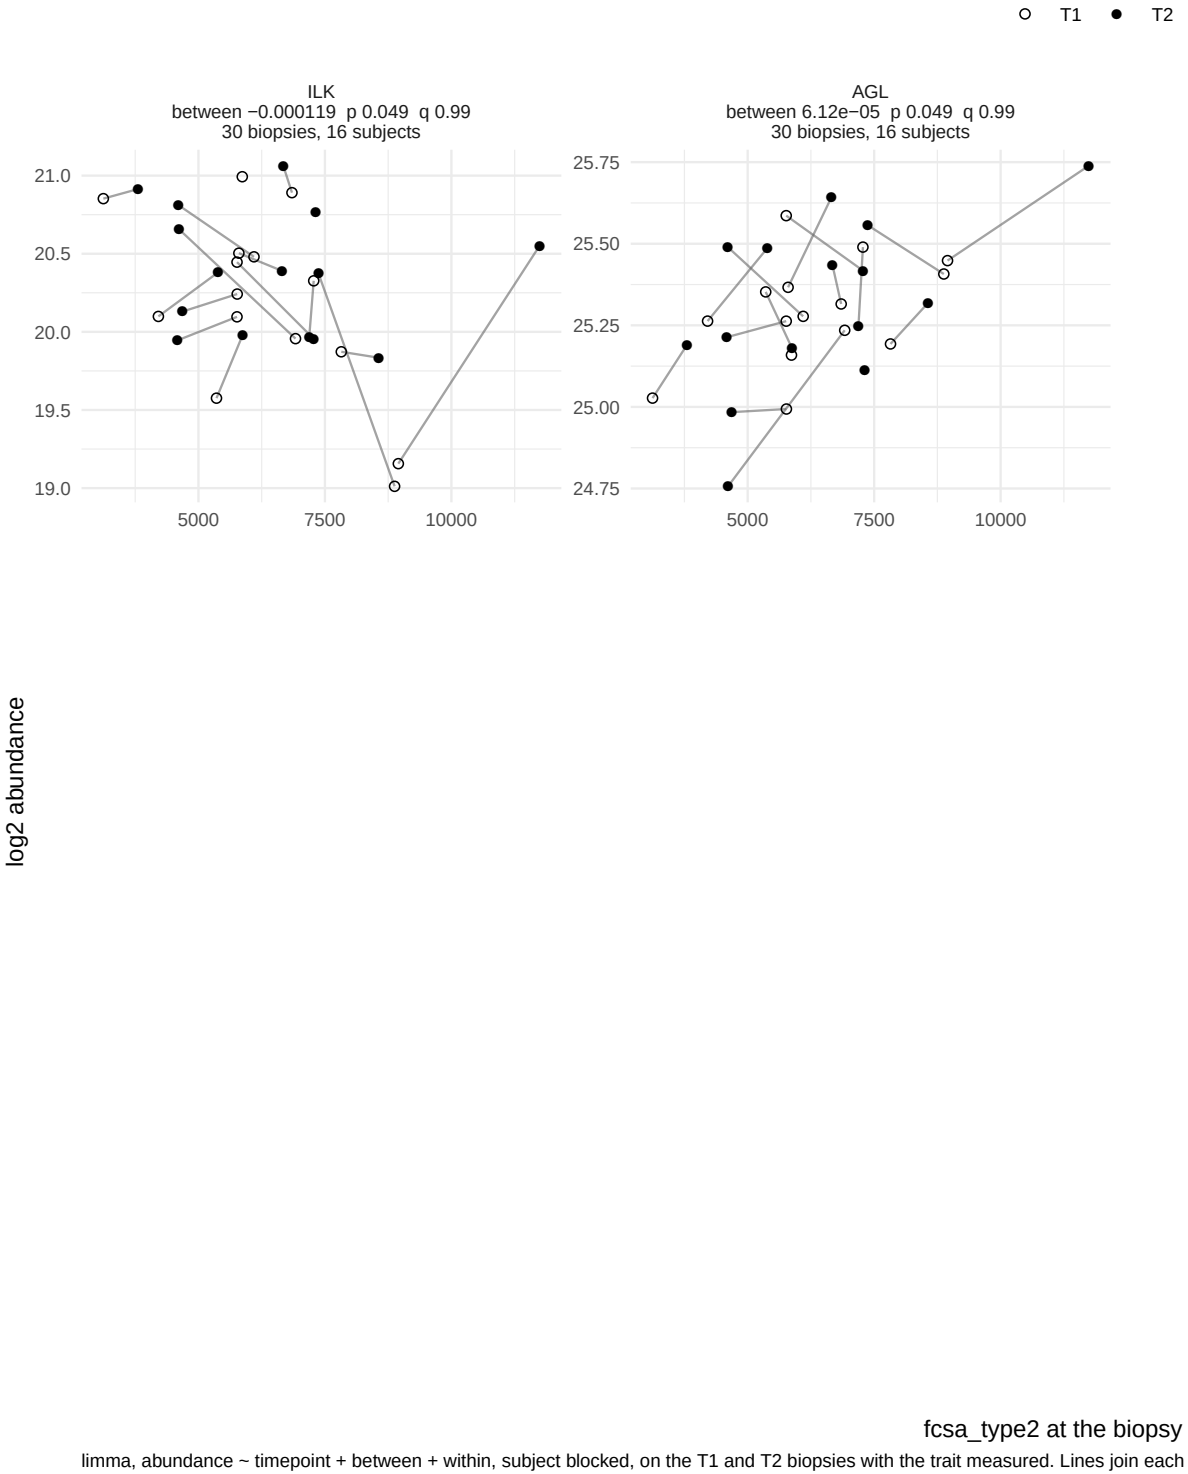

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

mcsa, within−person term


62 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 1 of 6.

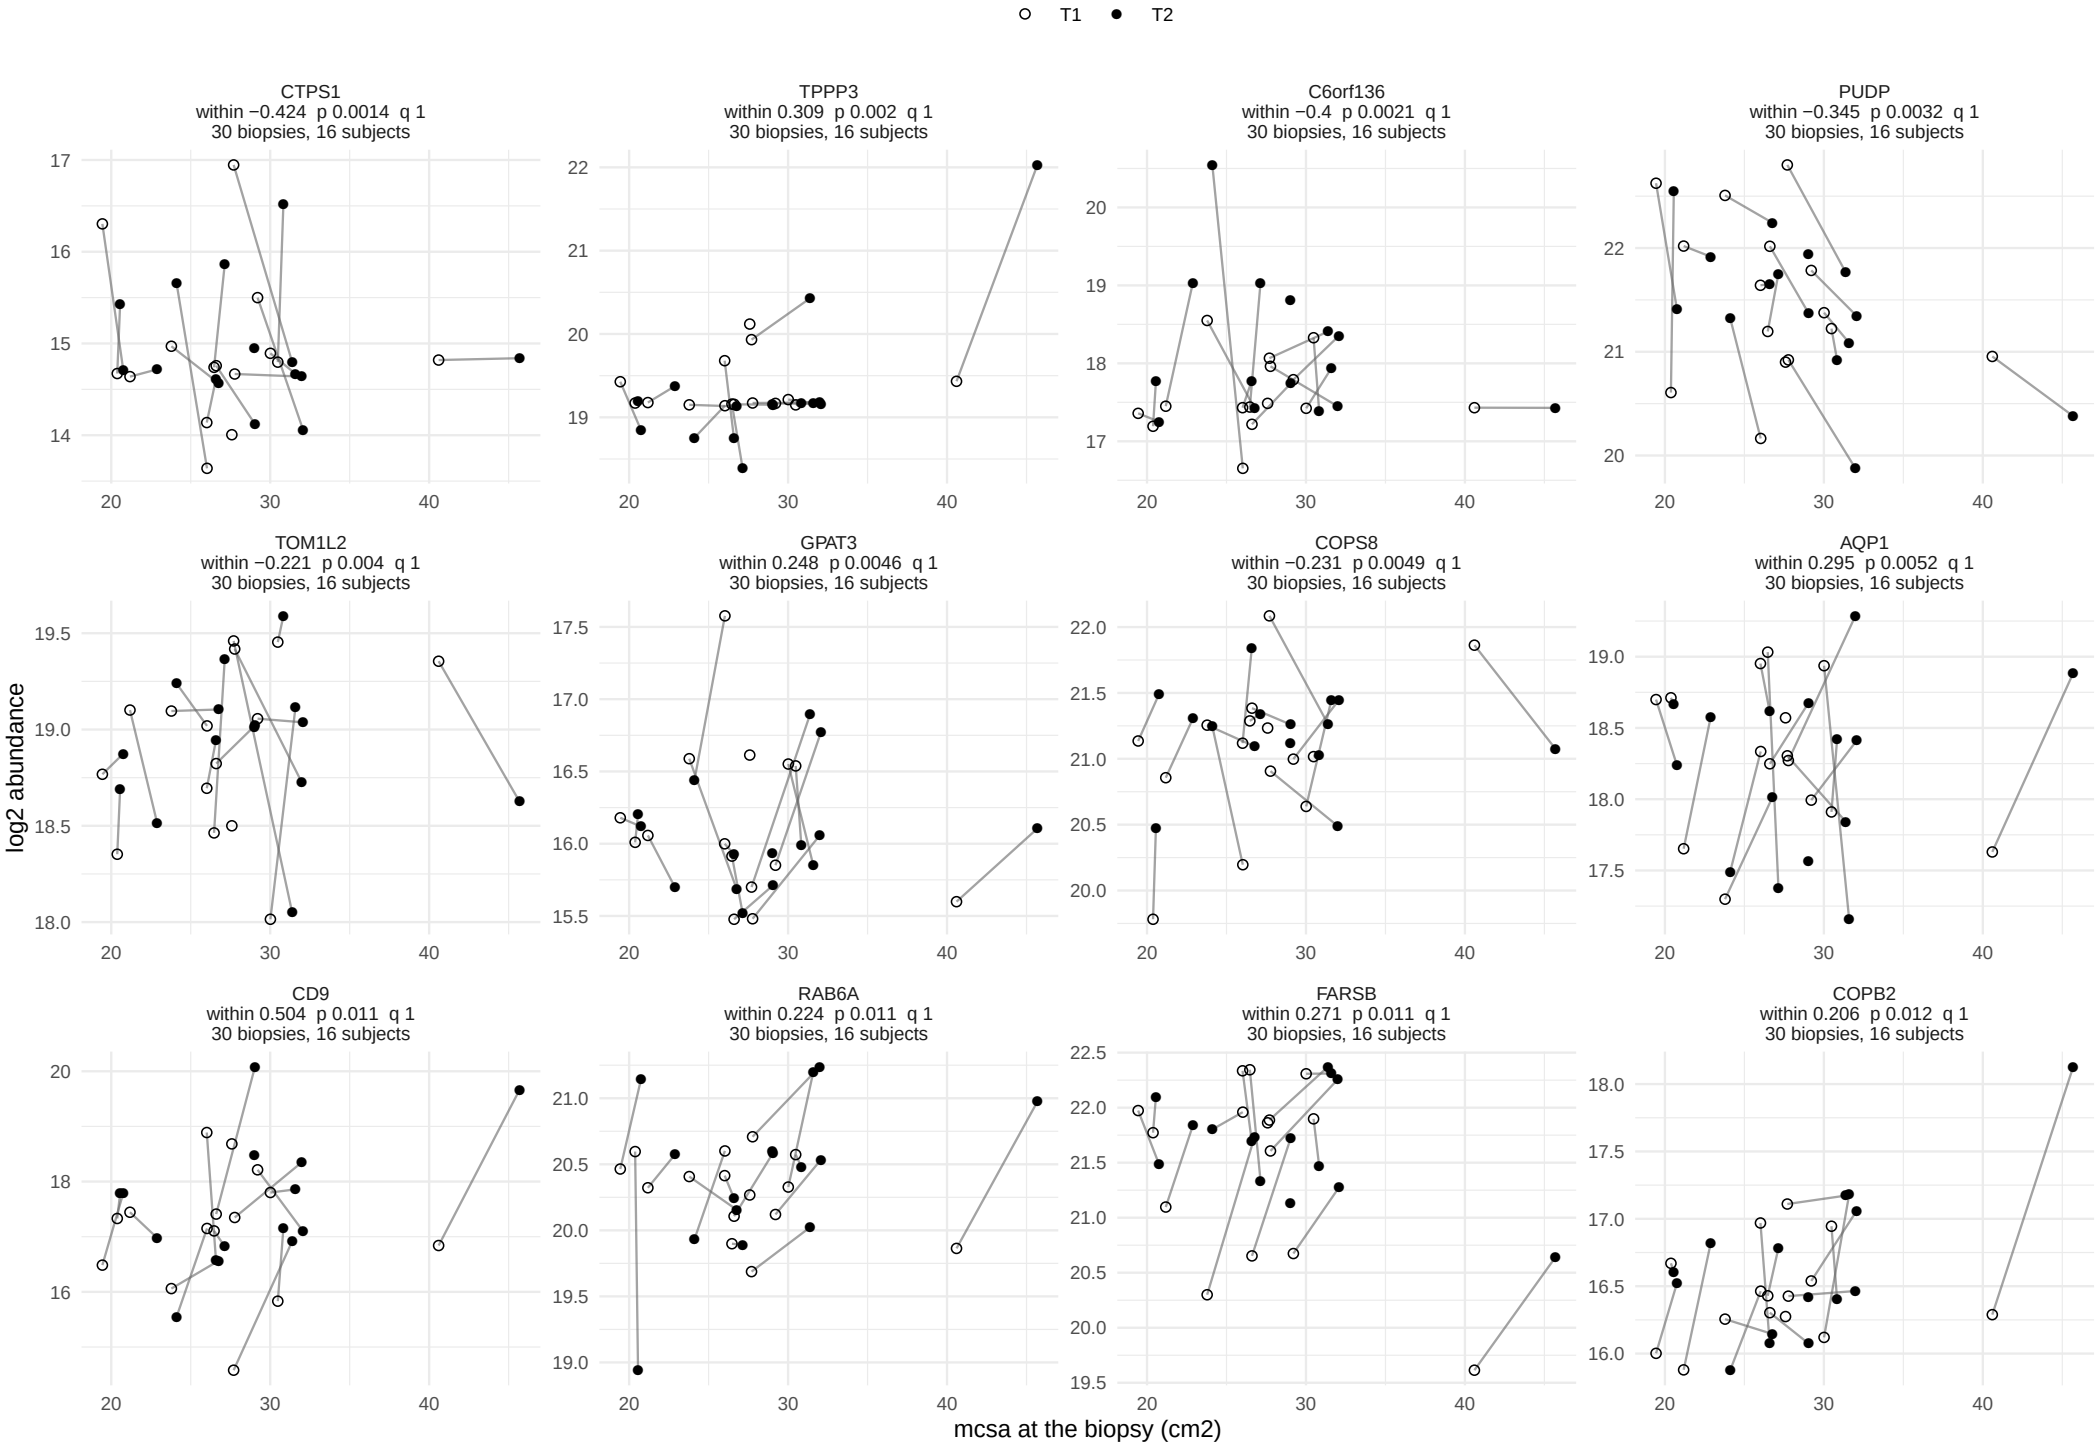

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

mcsa, within−person term


62 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 2 of 6.

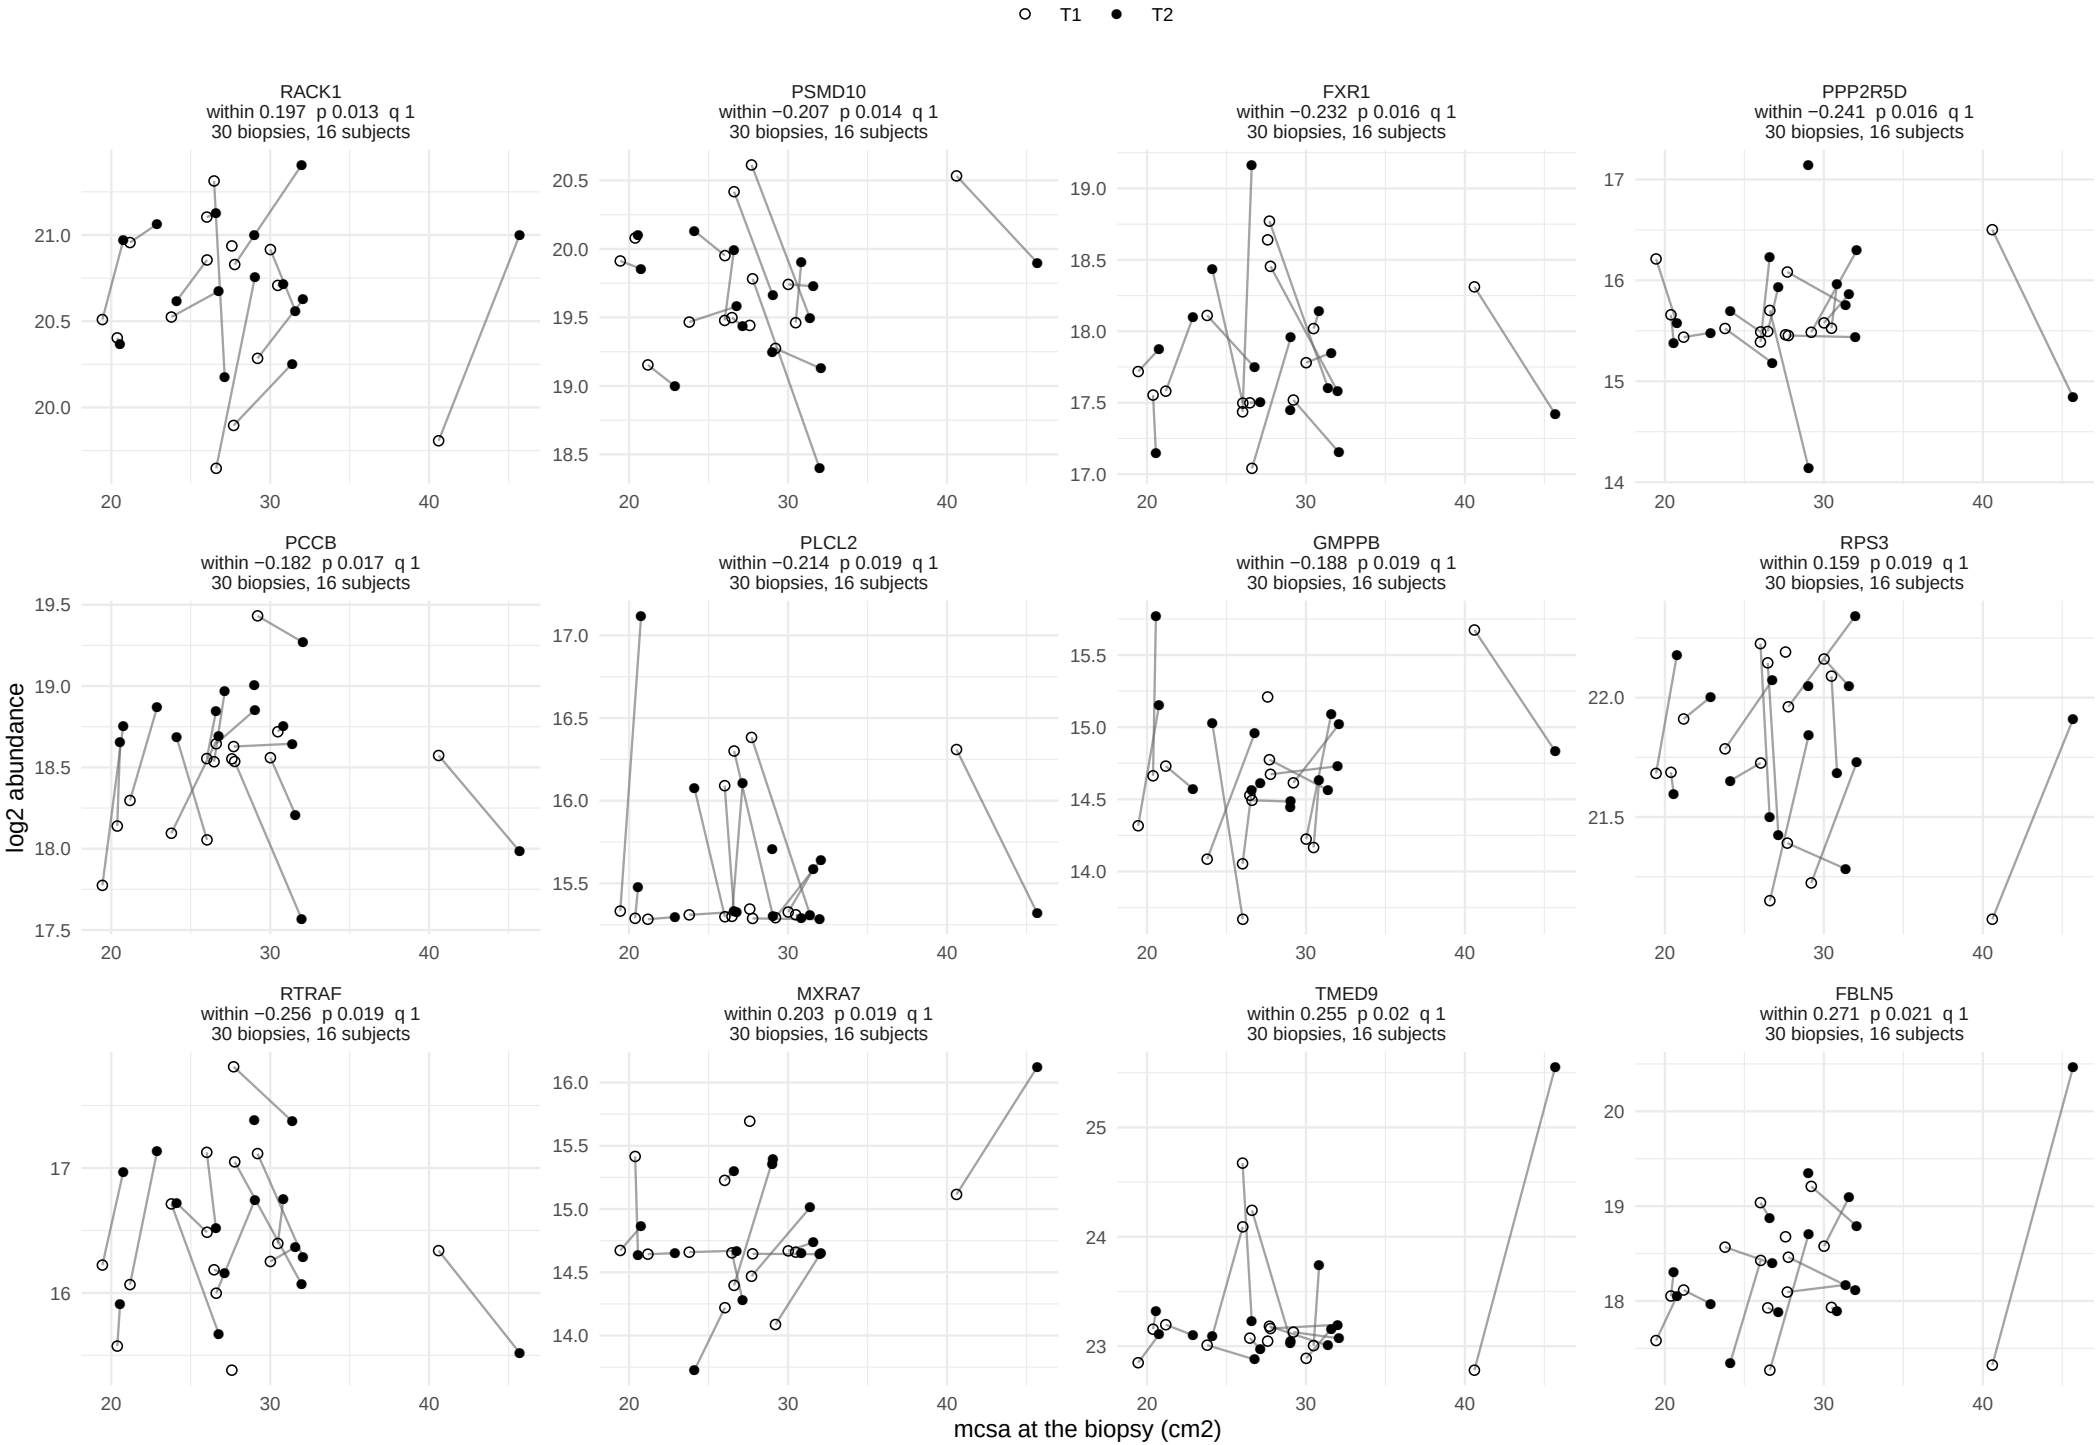

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

mcsa, within−person term


62 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 3 of 6.

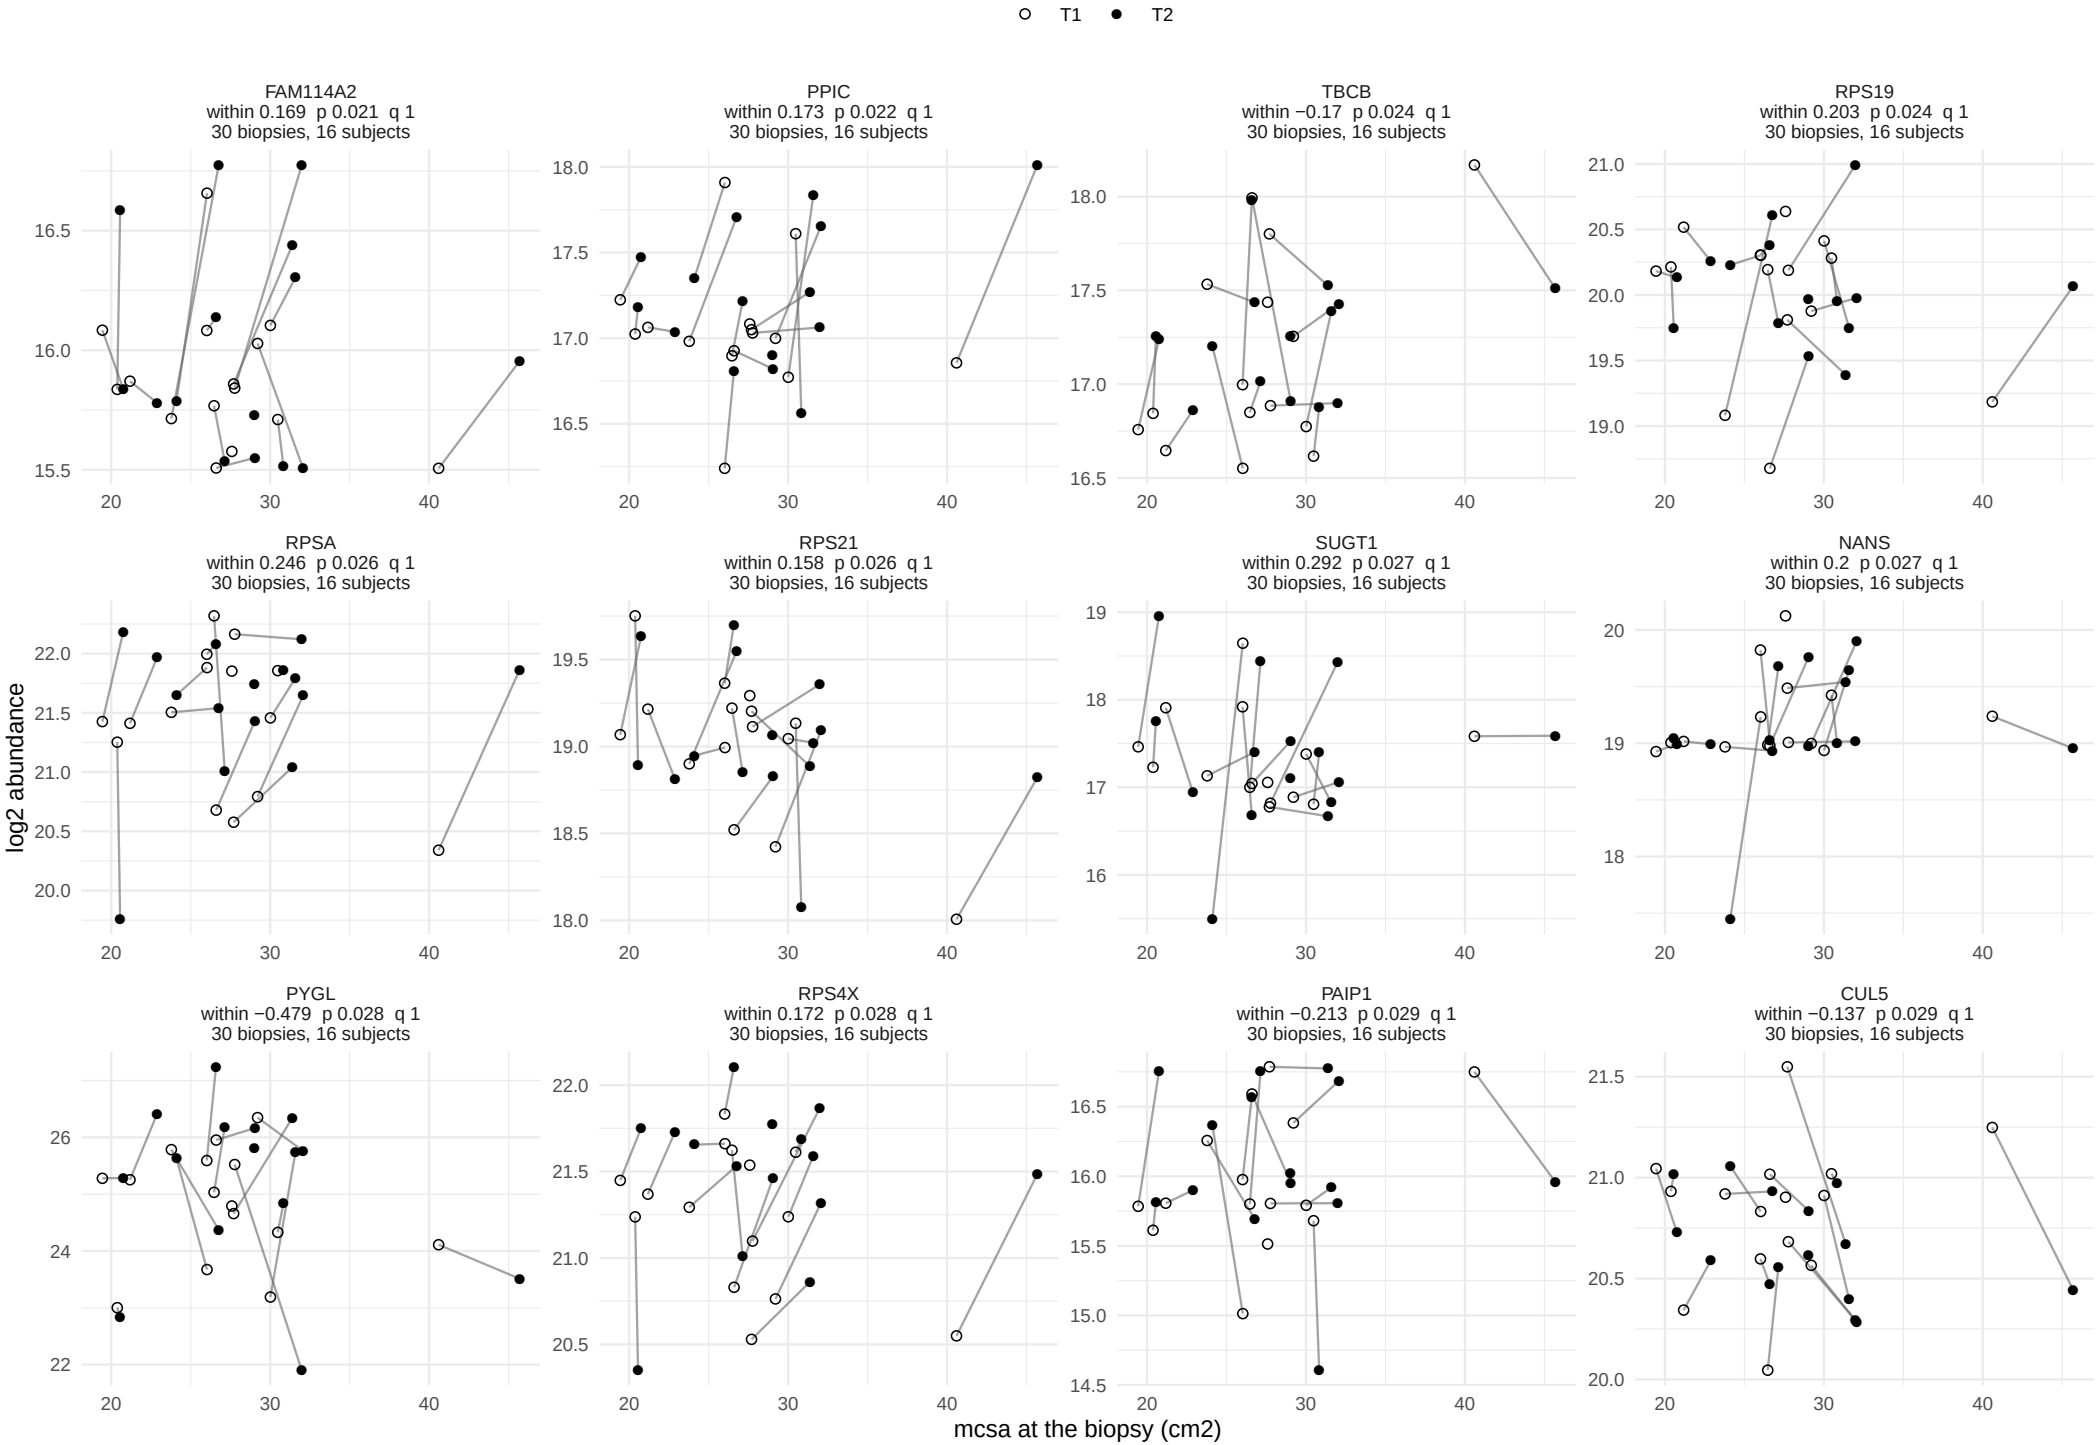

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

mcsa, within−person term


62 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 4 of 6.

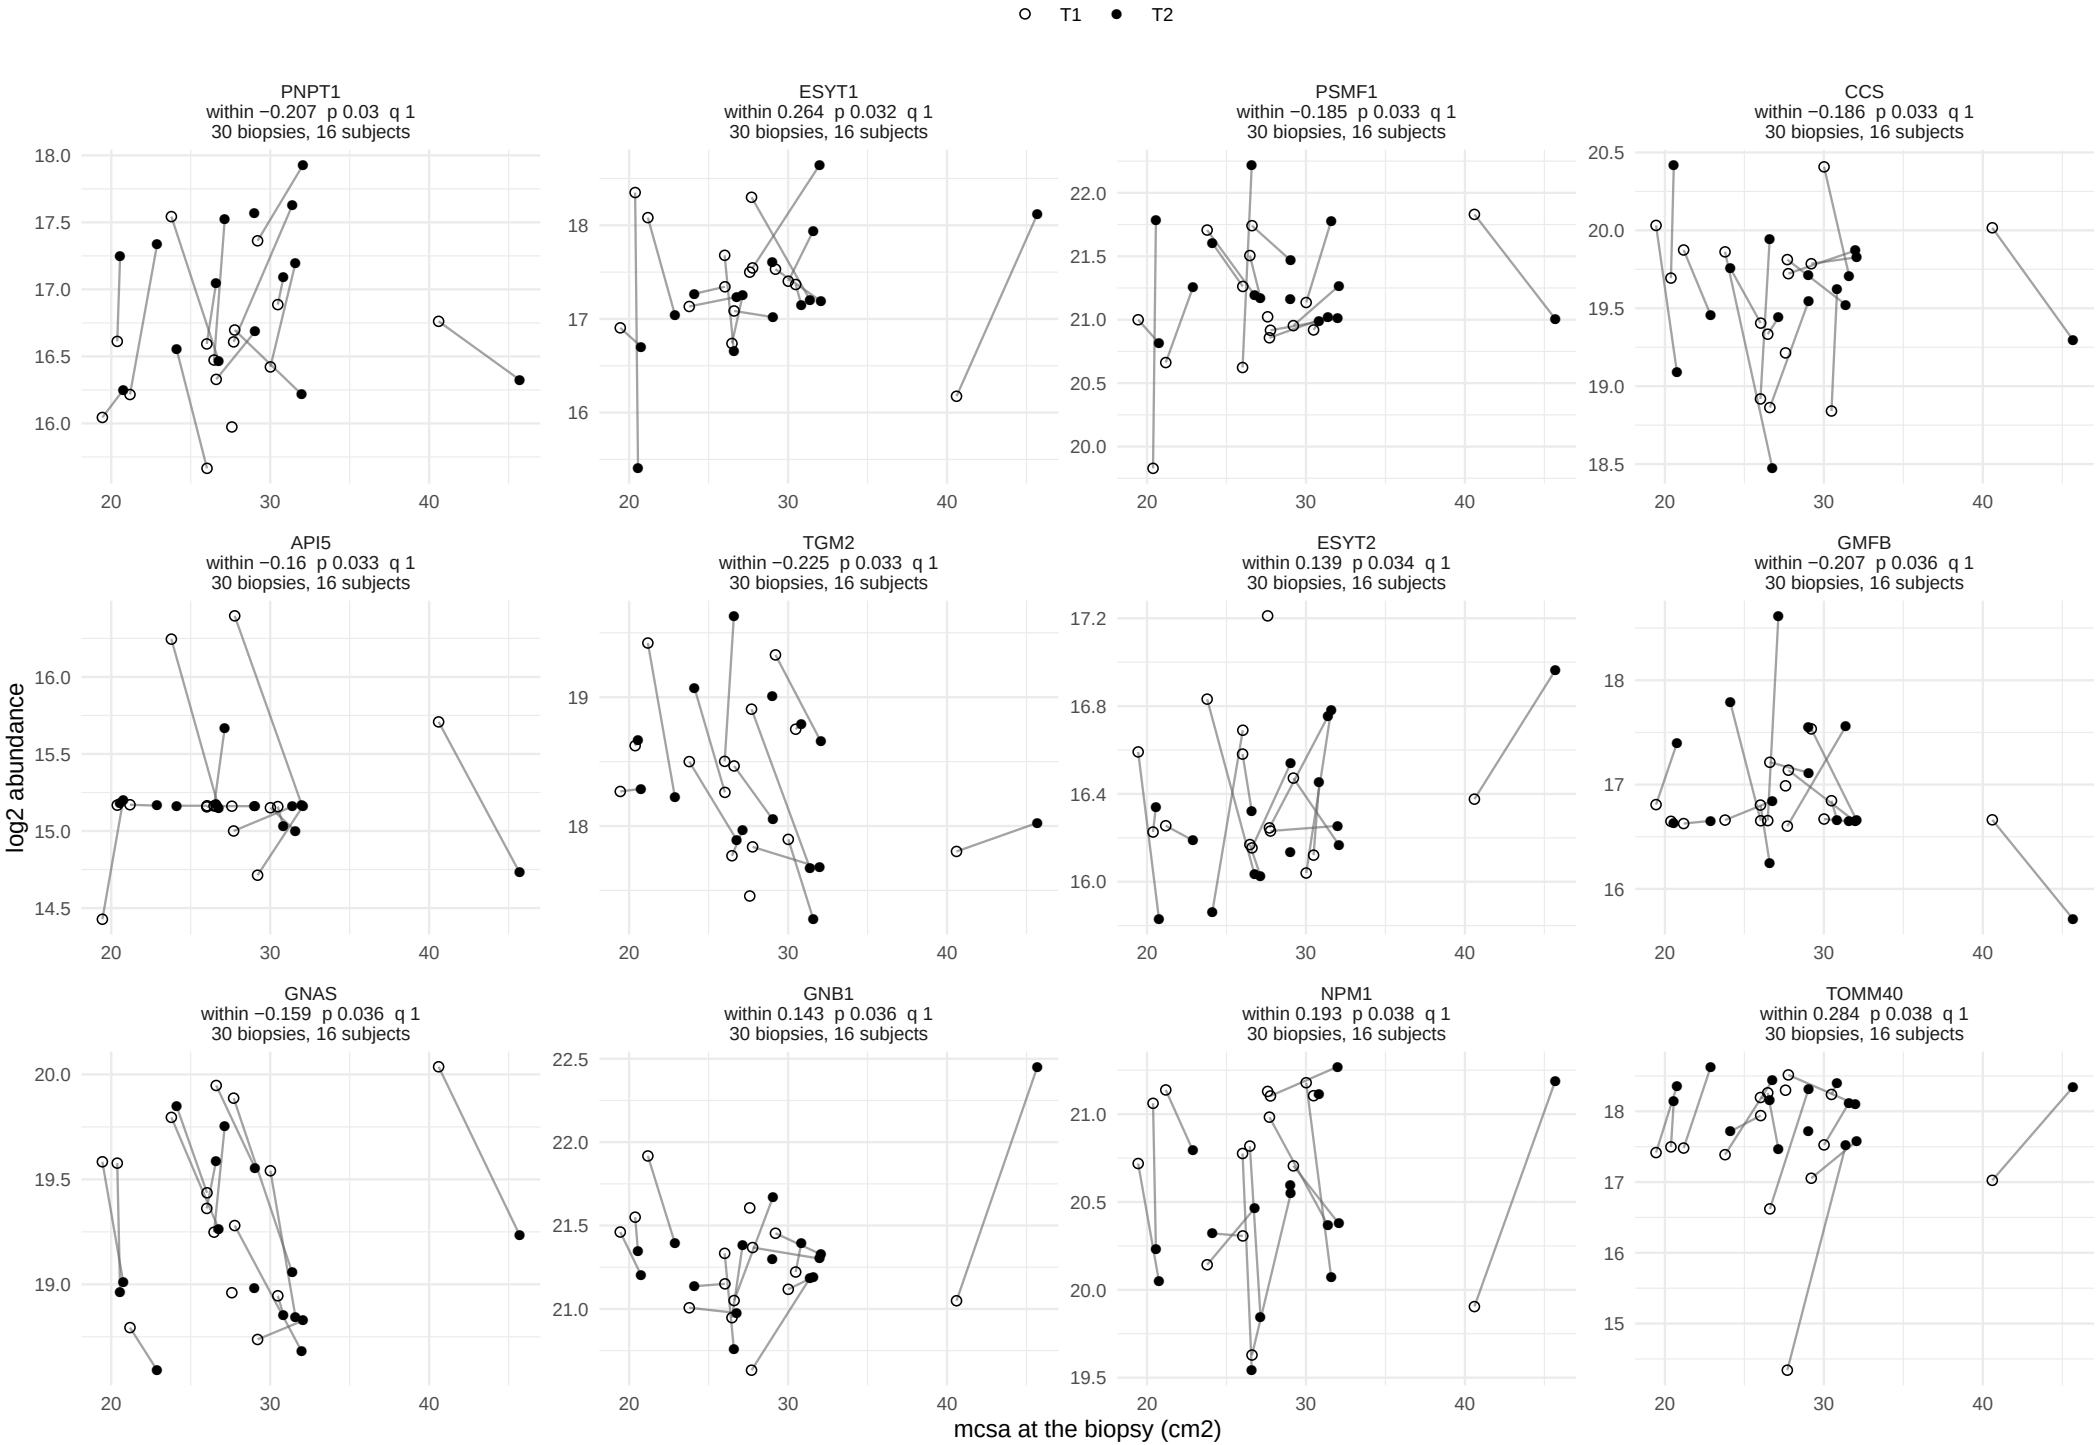

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

mcsa, within−person term


62 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 5 of 6.

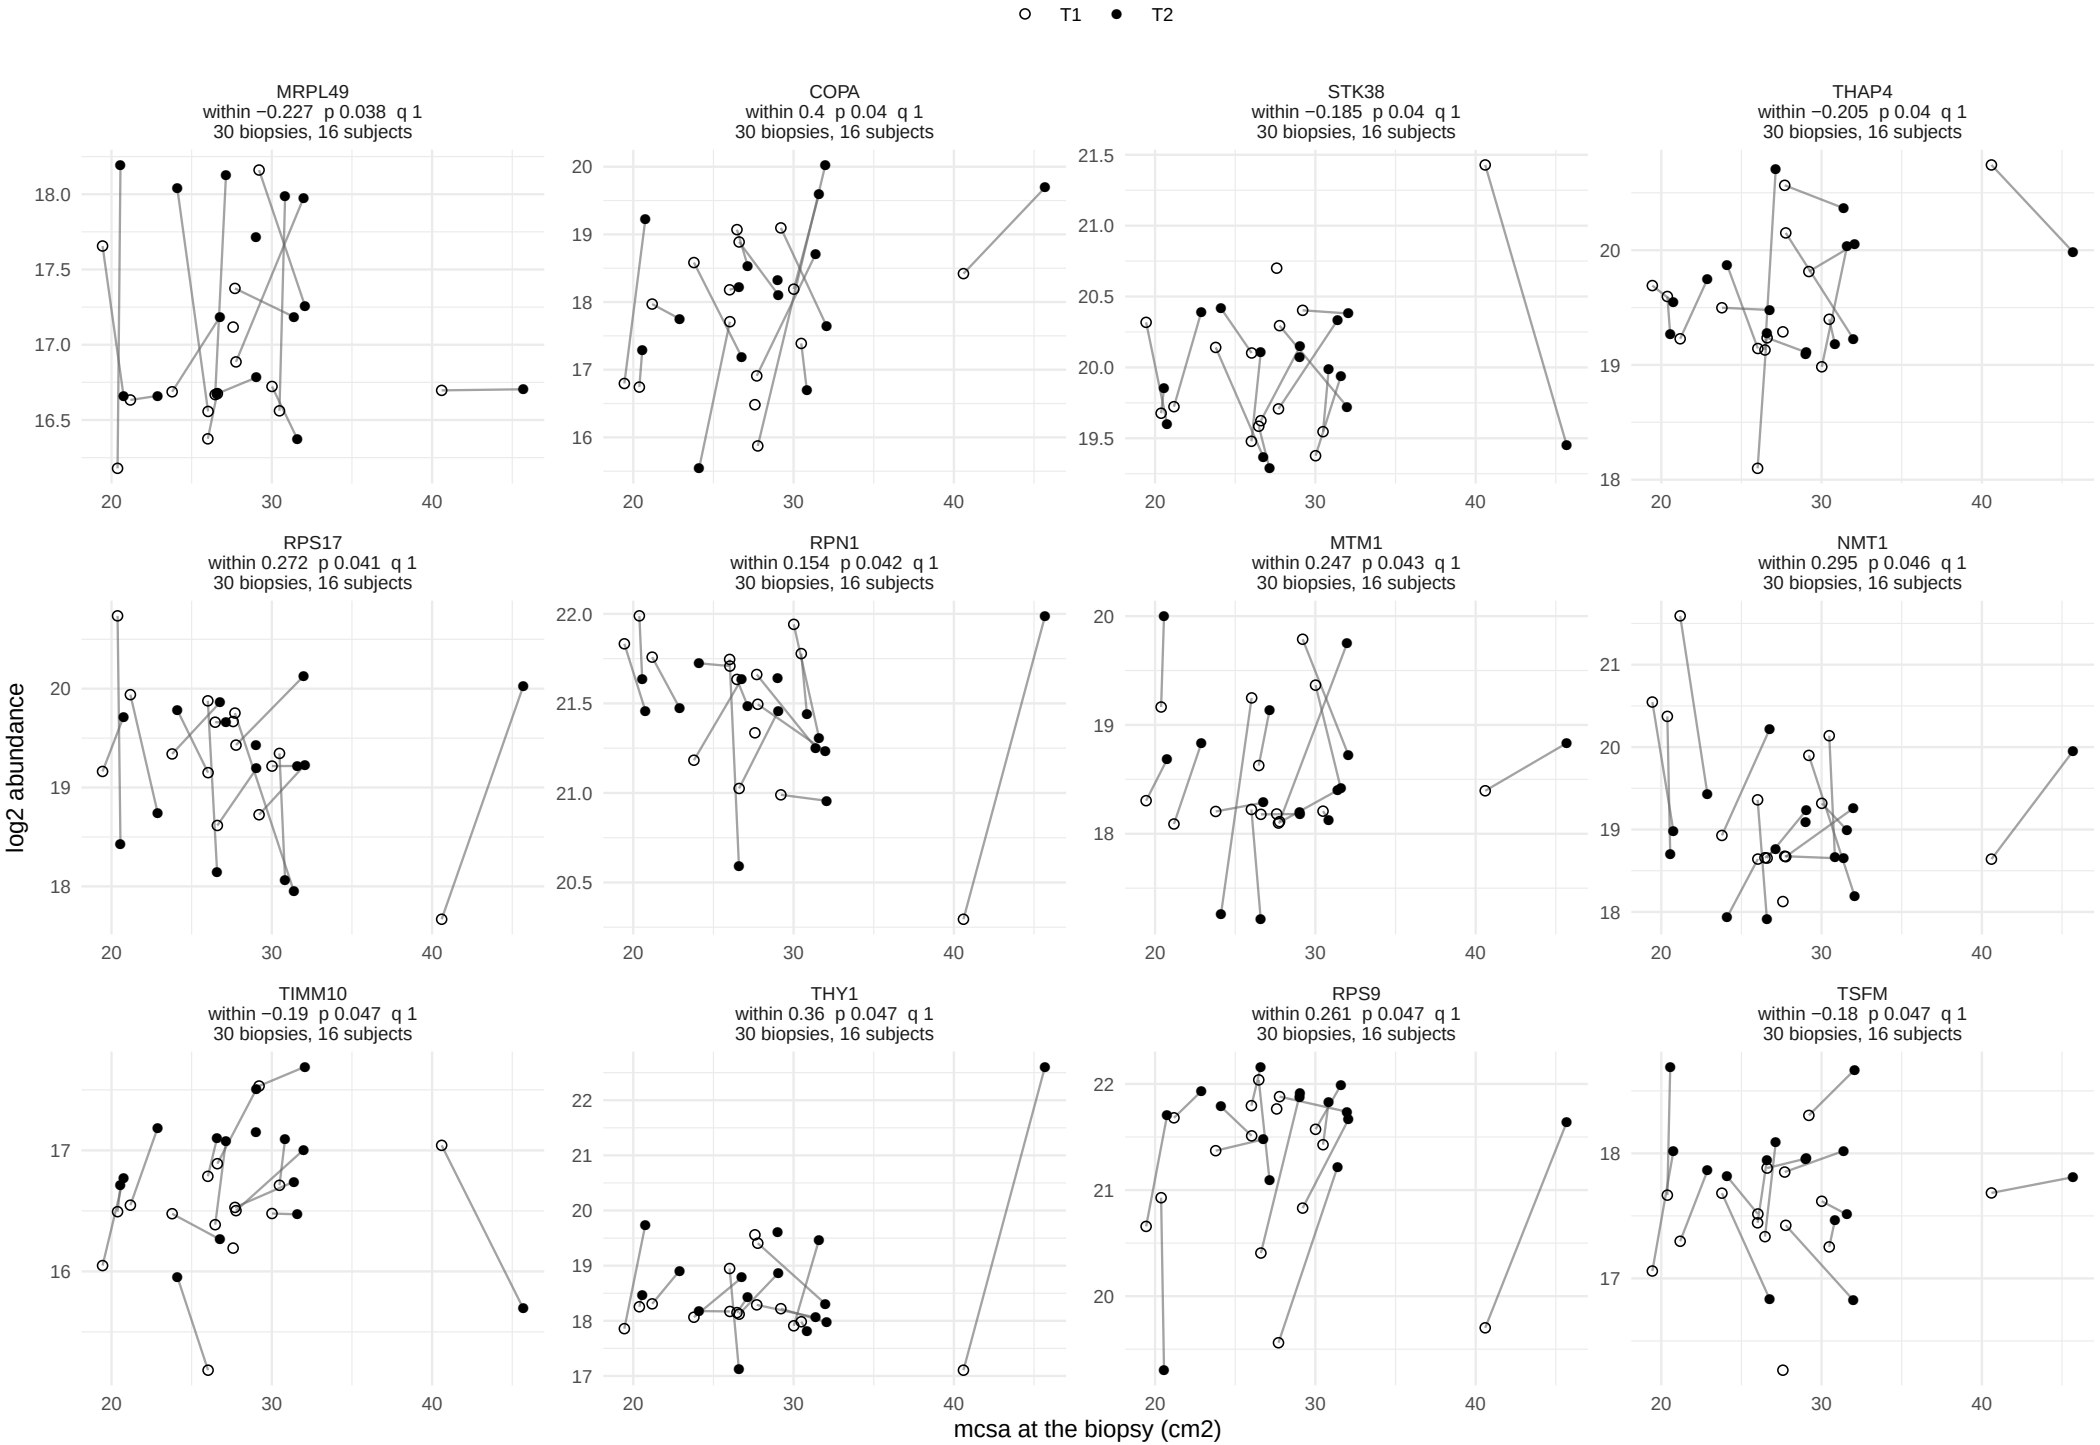

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

mcsa, within−person term


62 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 6 of 6.

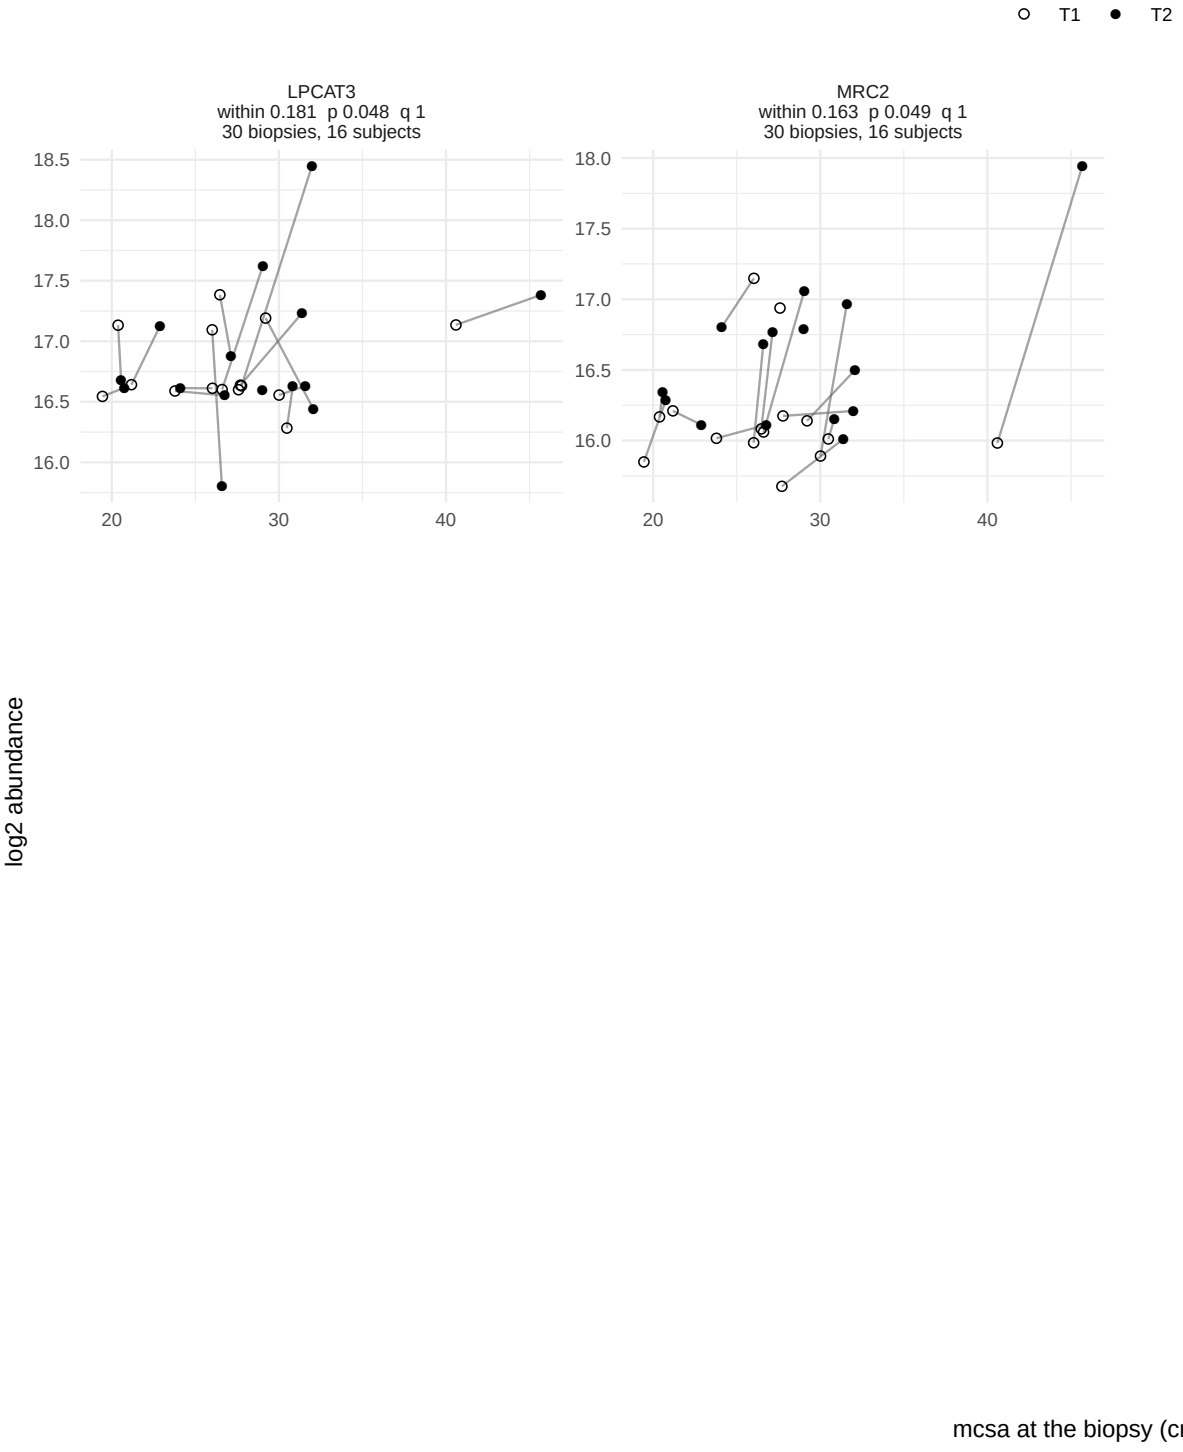

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

mcsa, between−person term


179 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 1 of 15.

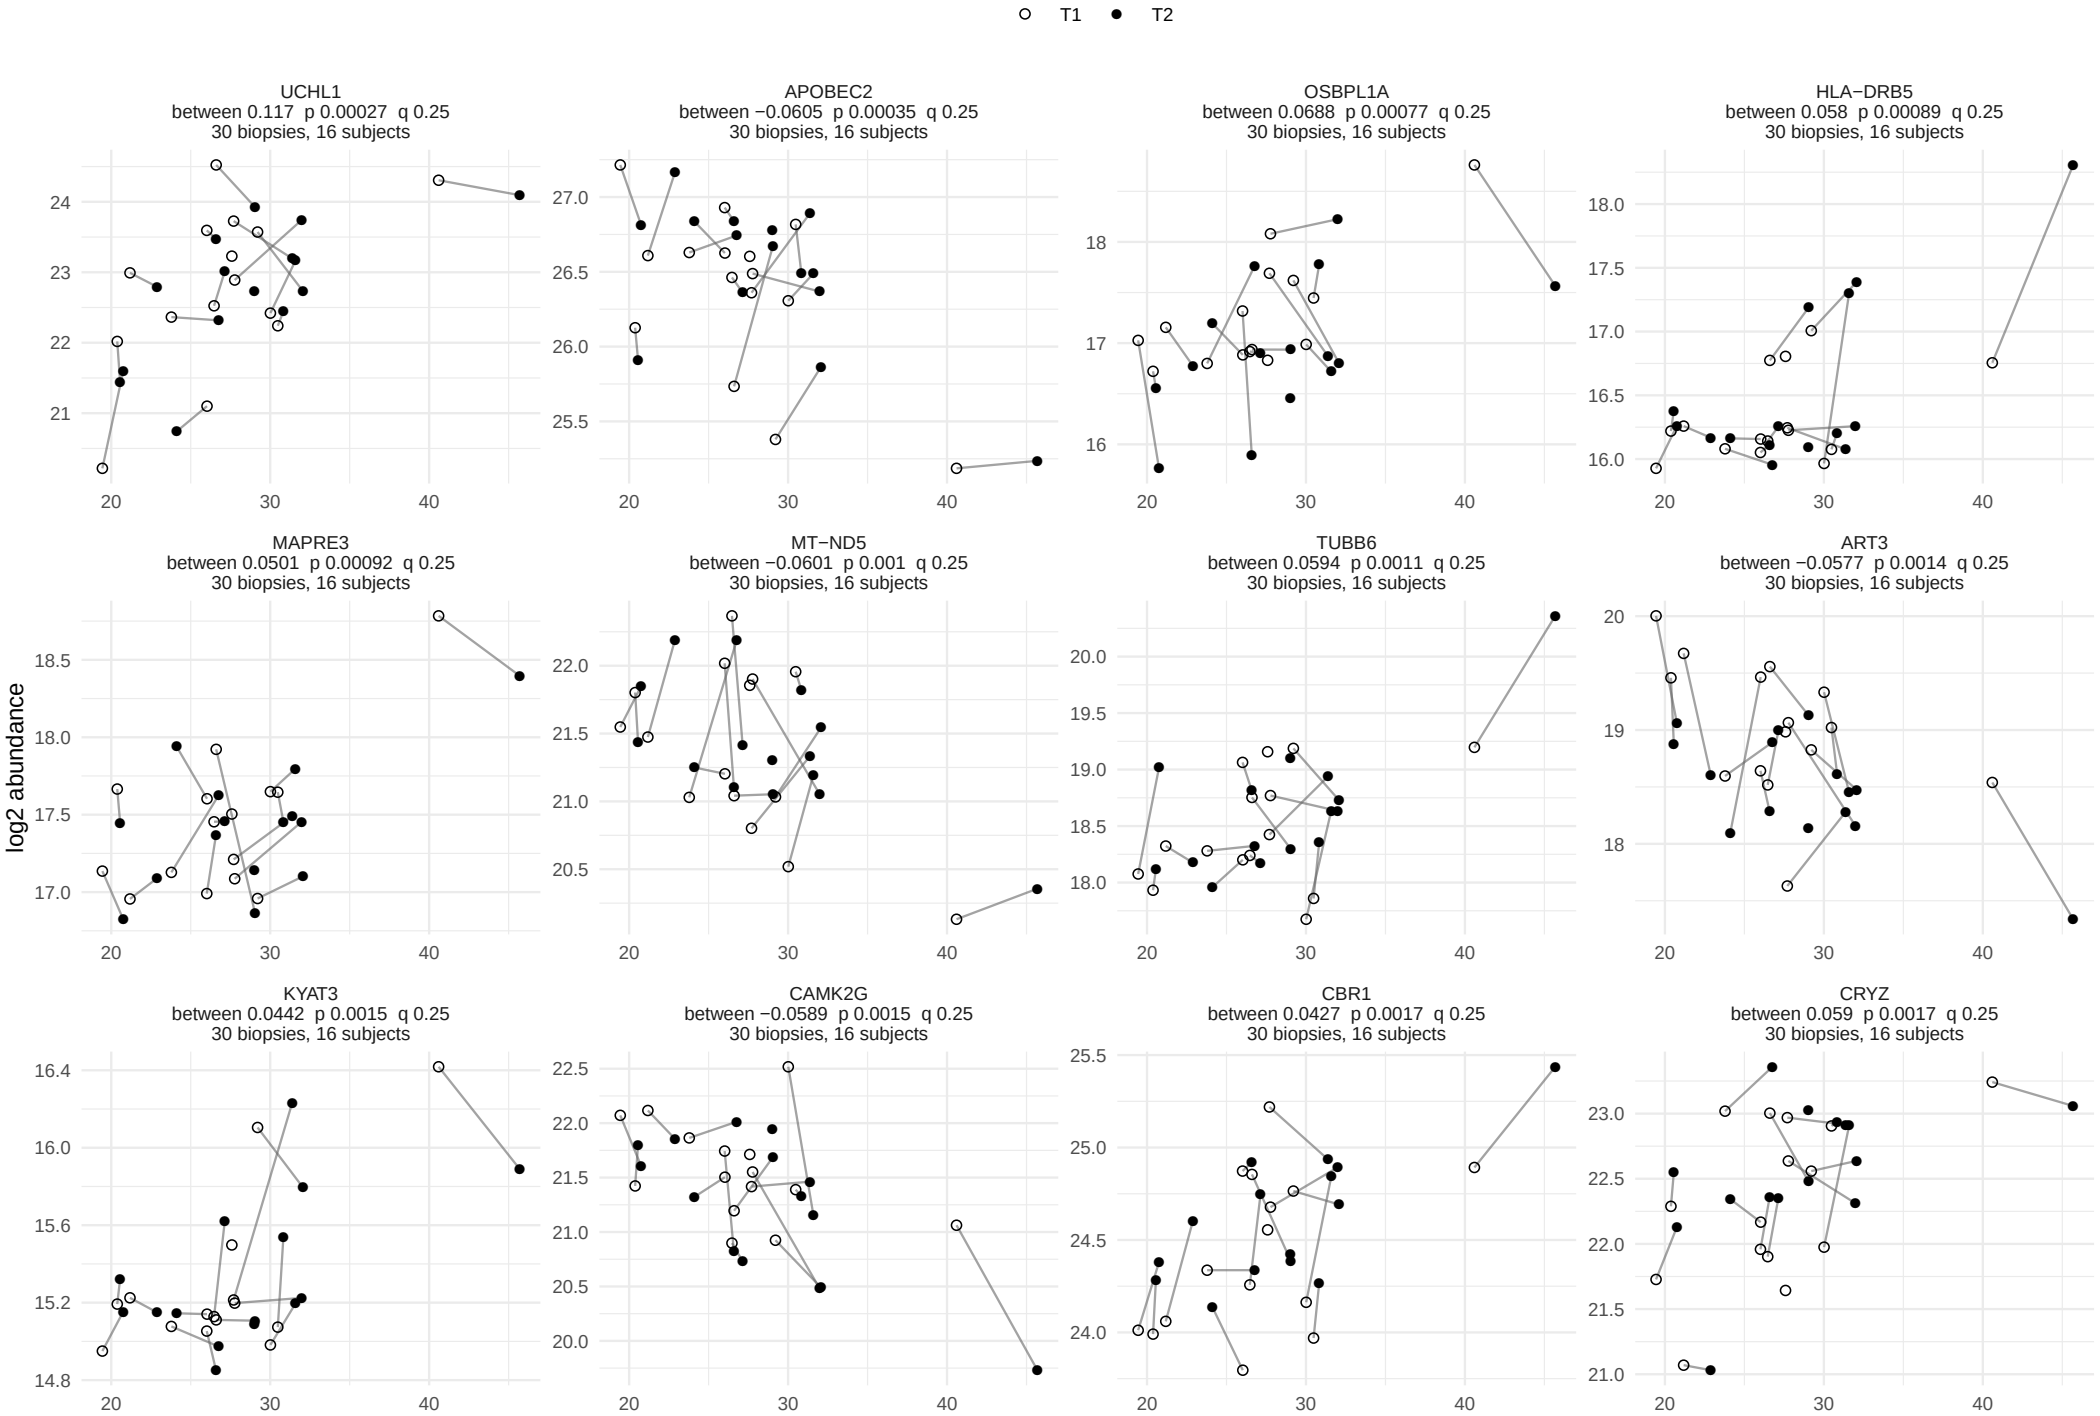

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

mcsa, between−person term


179 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 2 of 15.

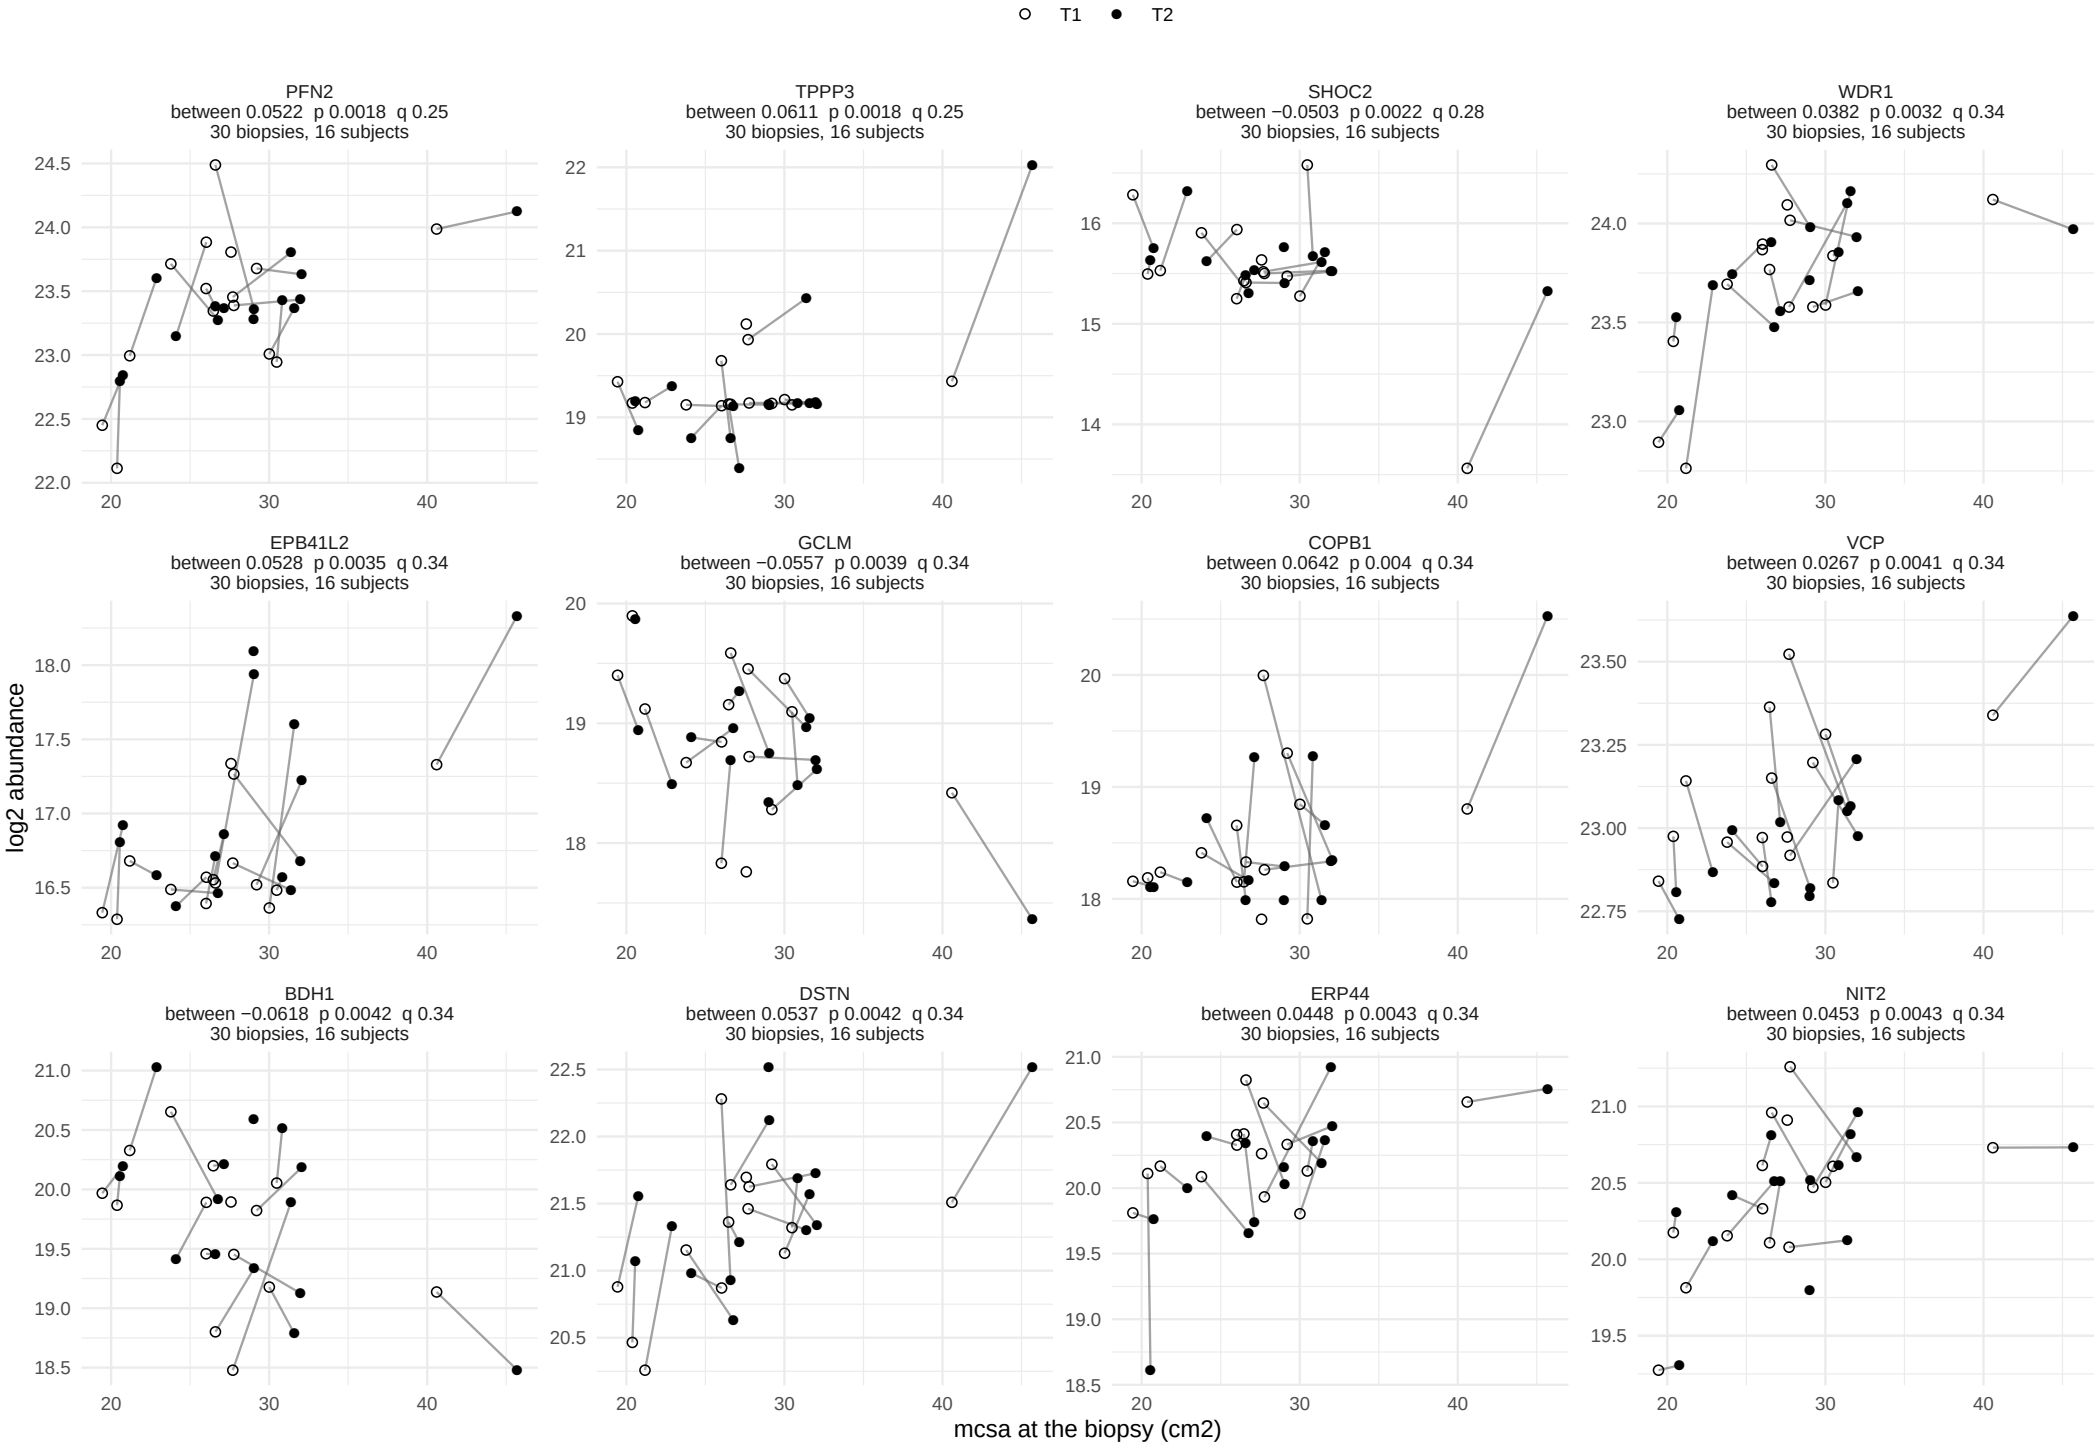

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

mcsa, between−person term


179 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 3 of 15.

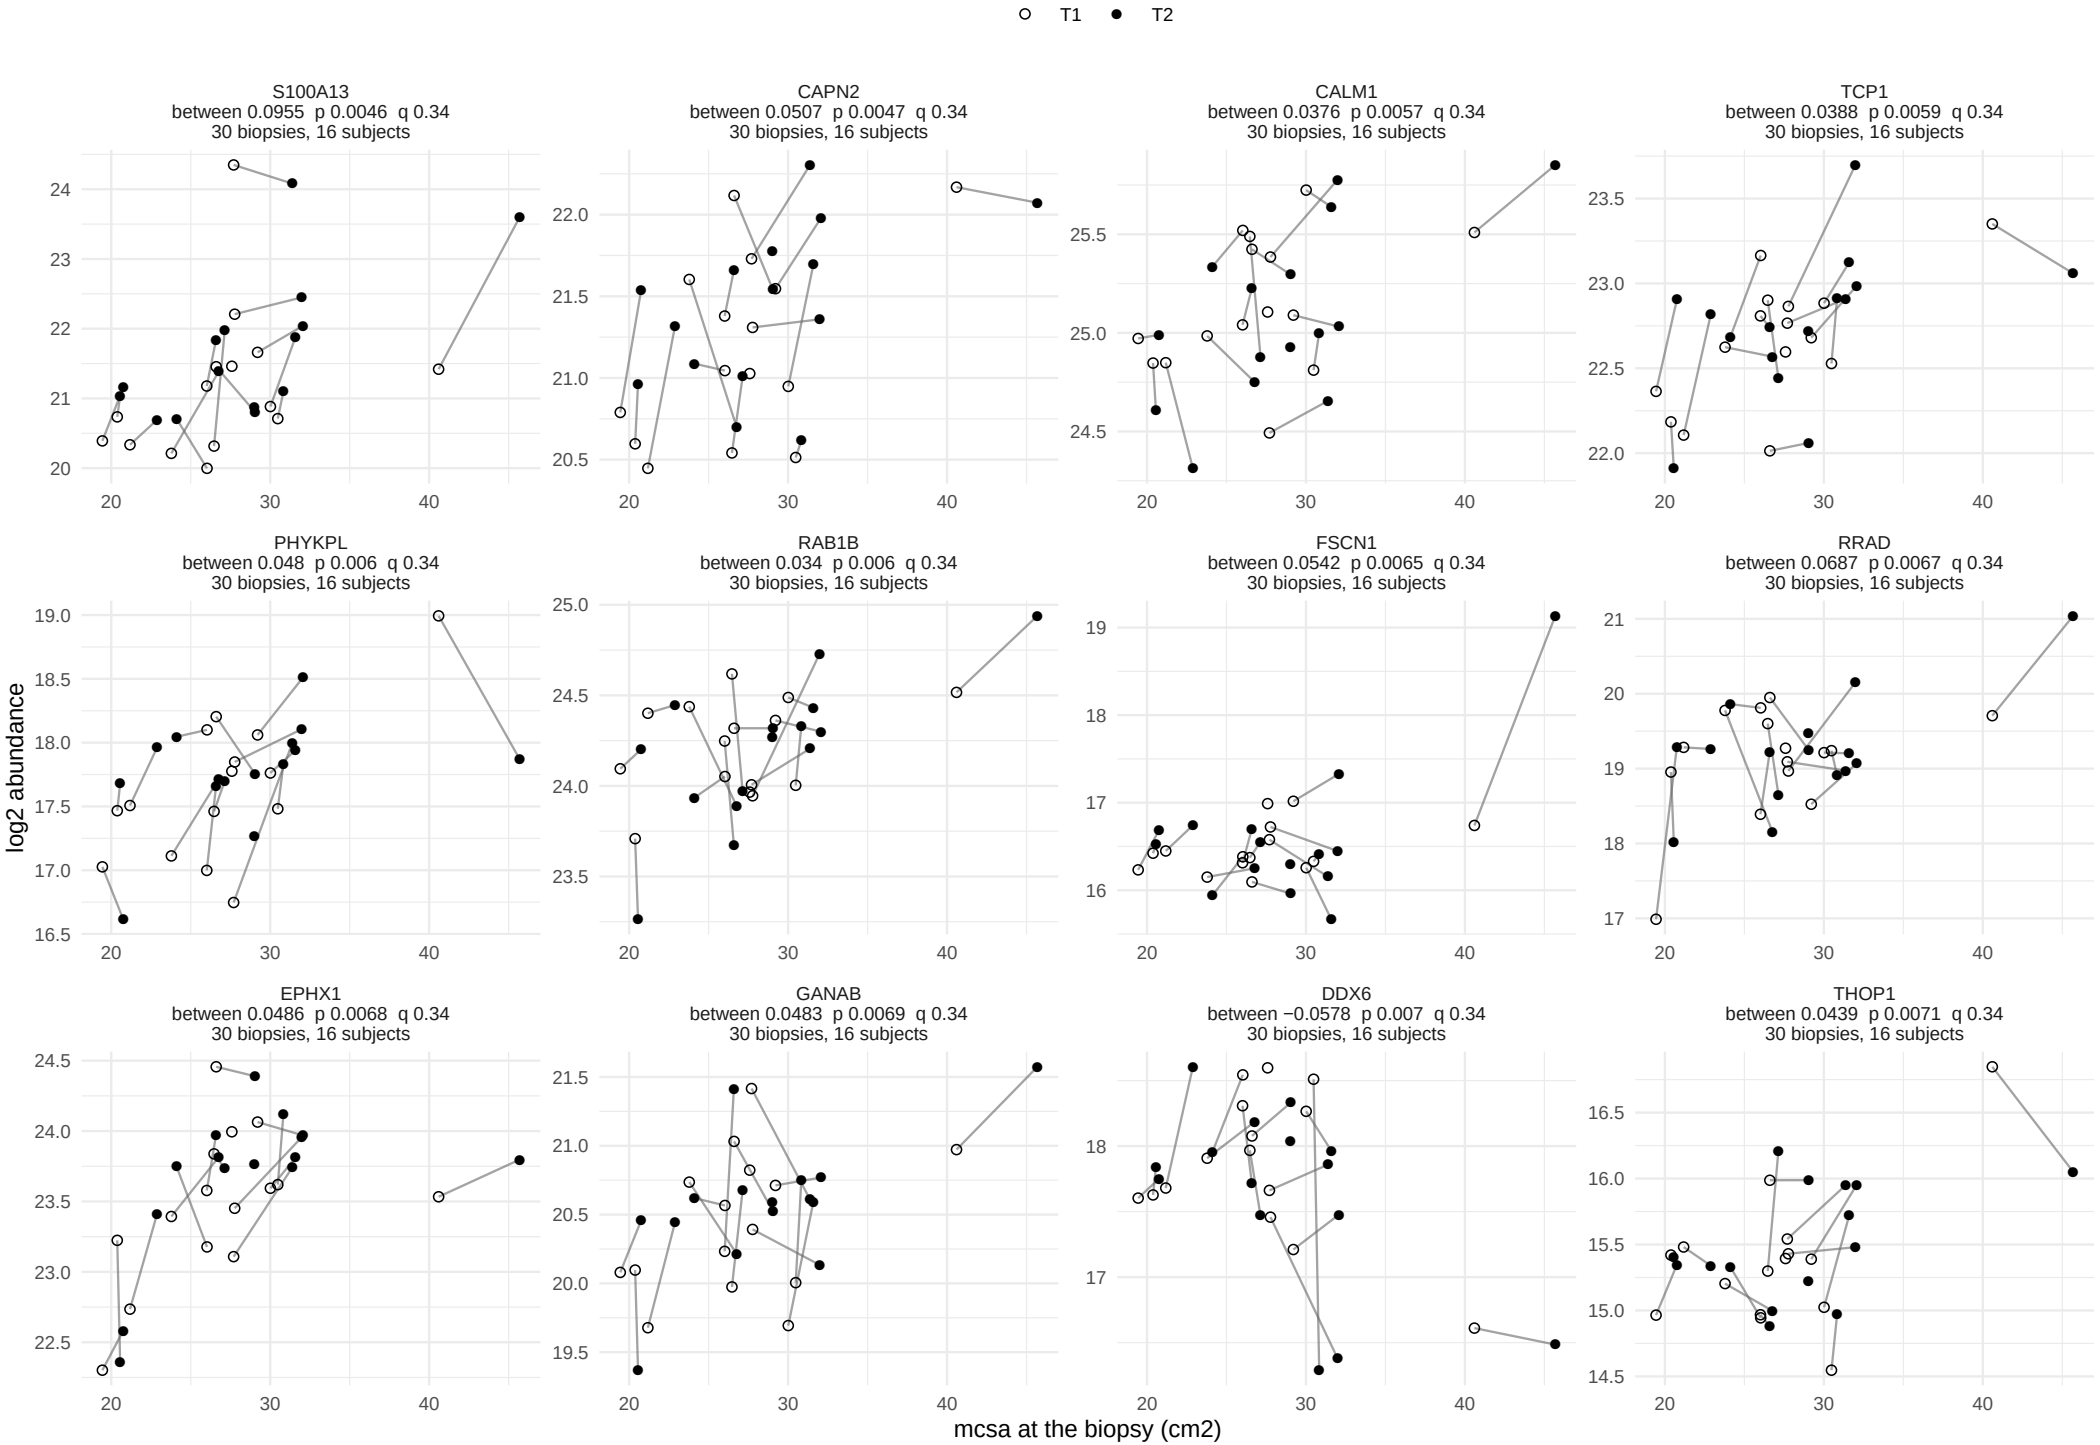

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

mcsa, between−person term


179 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 4 of 15.

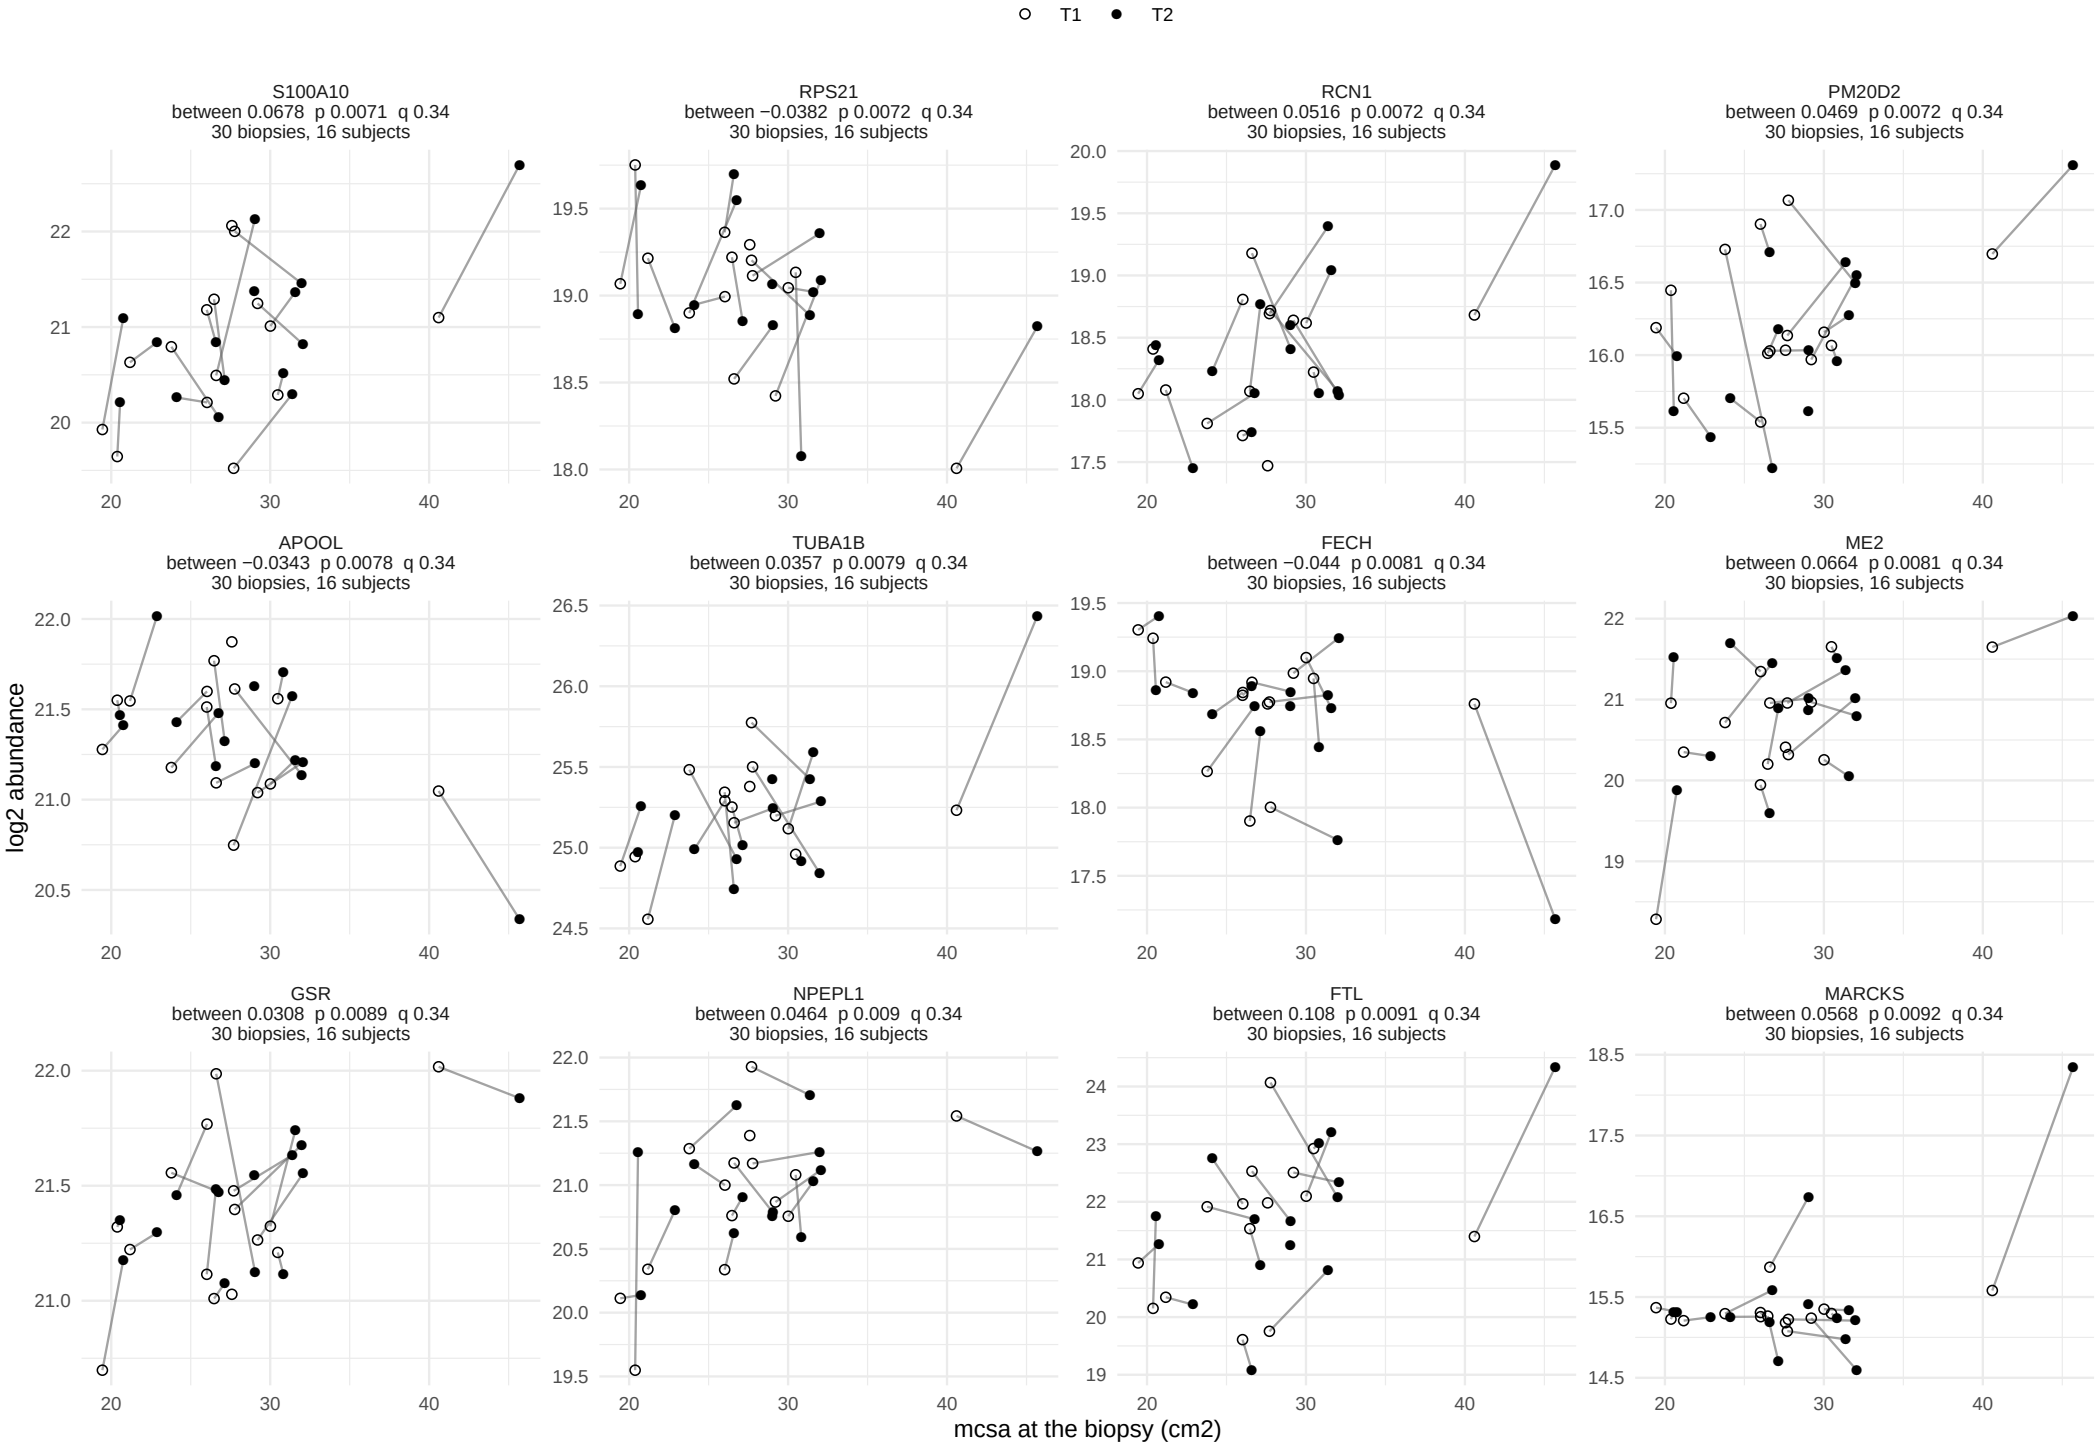

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

mcsa, between−person term


179 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 5 of 15.

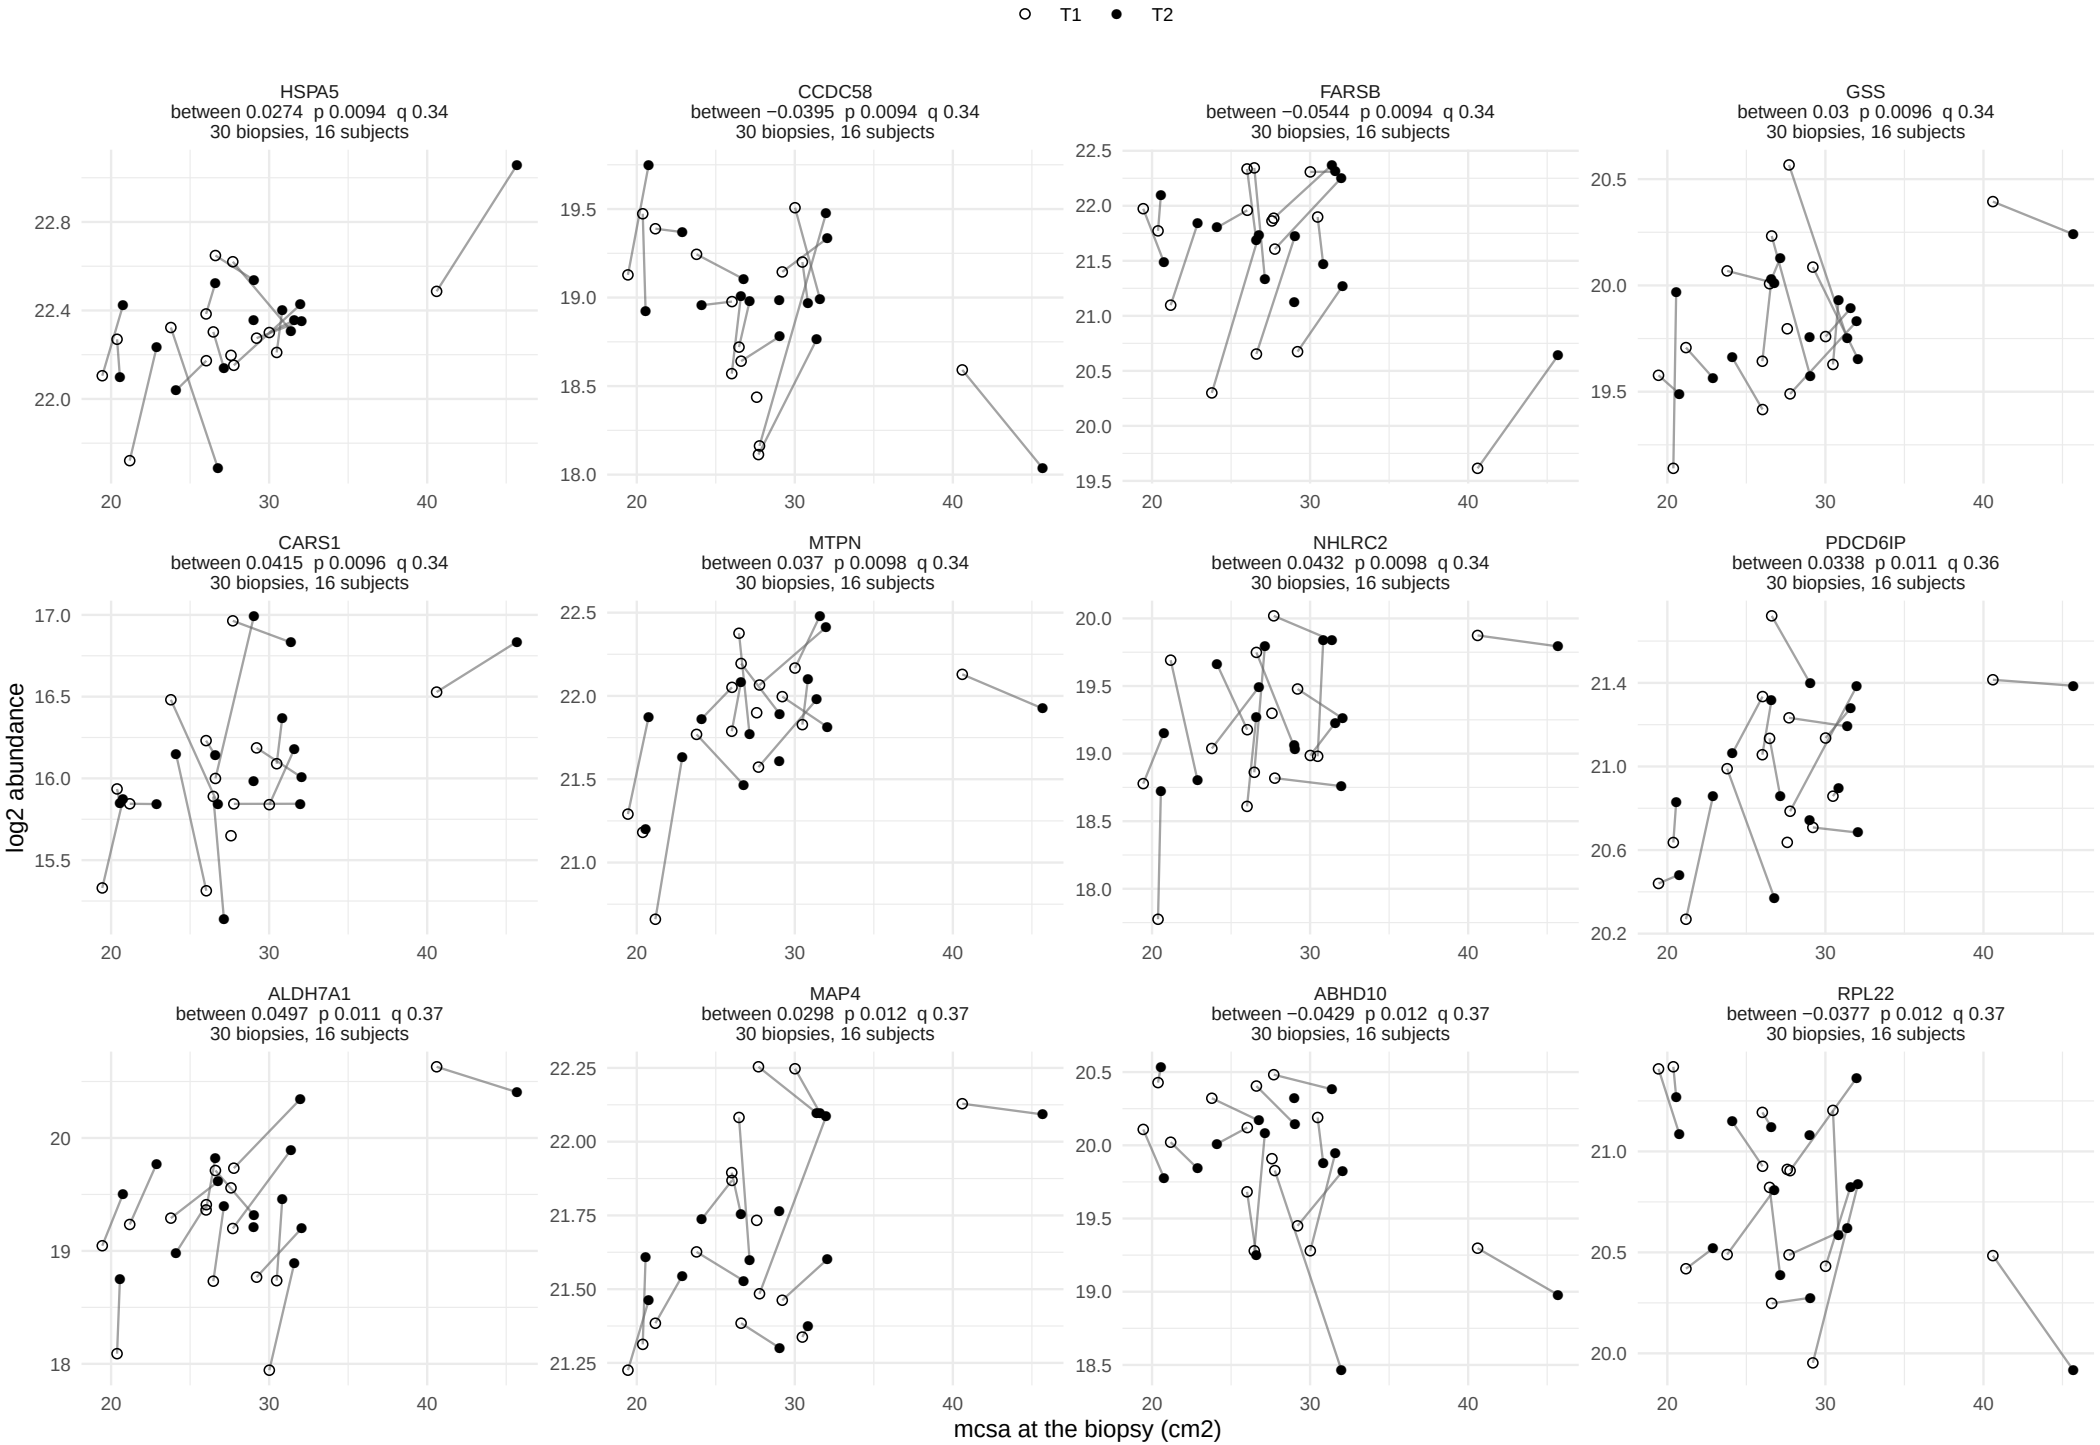

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

mcsa, between−person term


179 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 6 of 15.

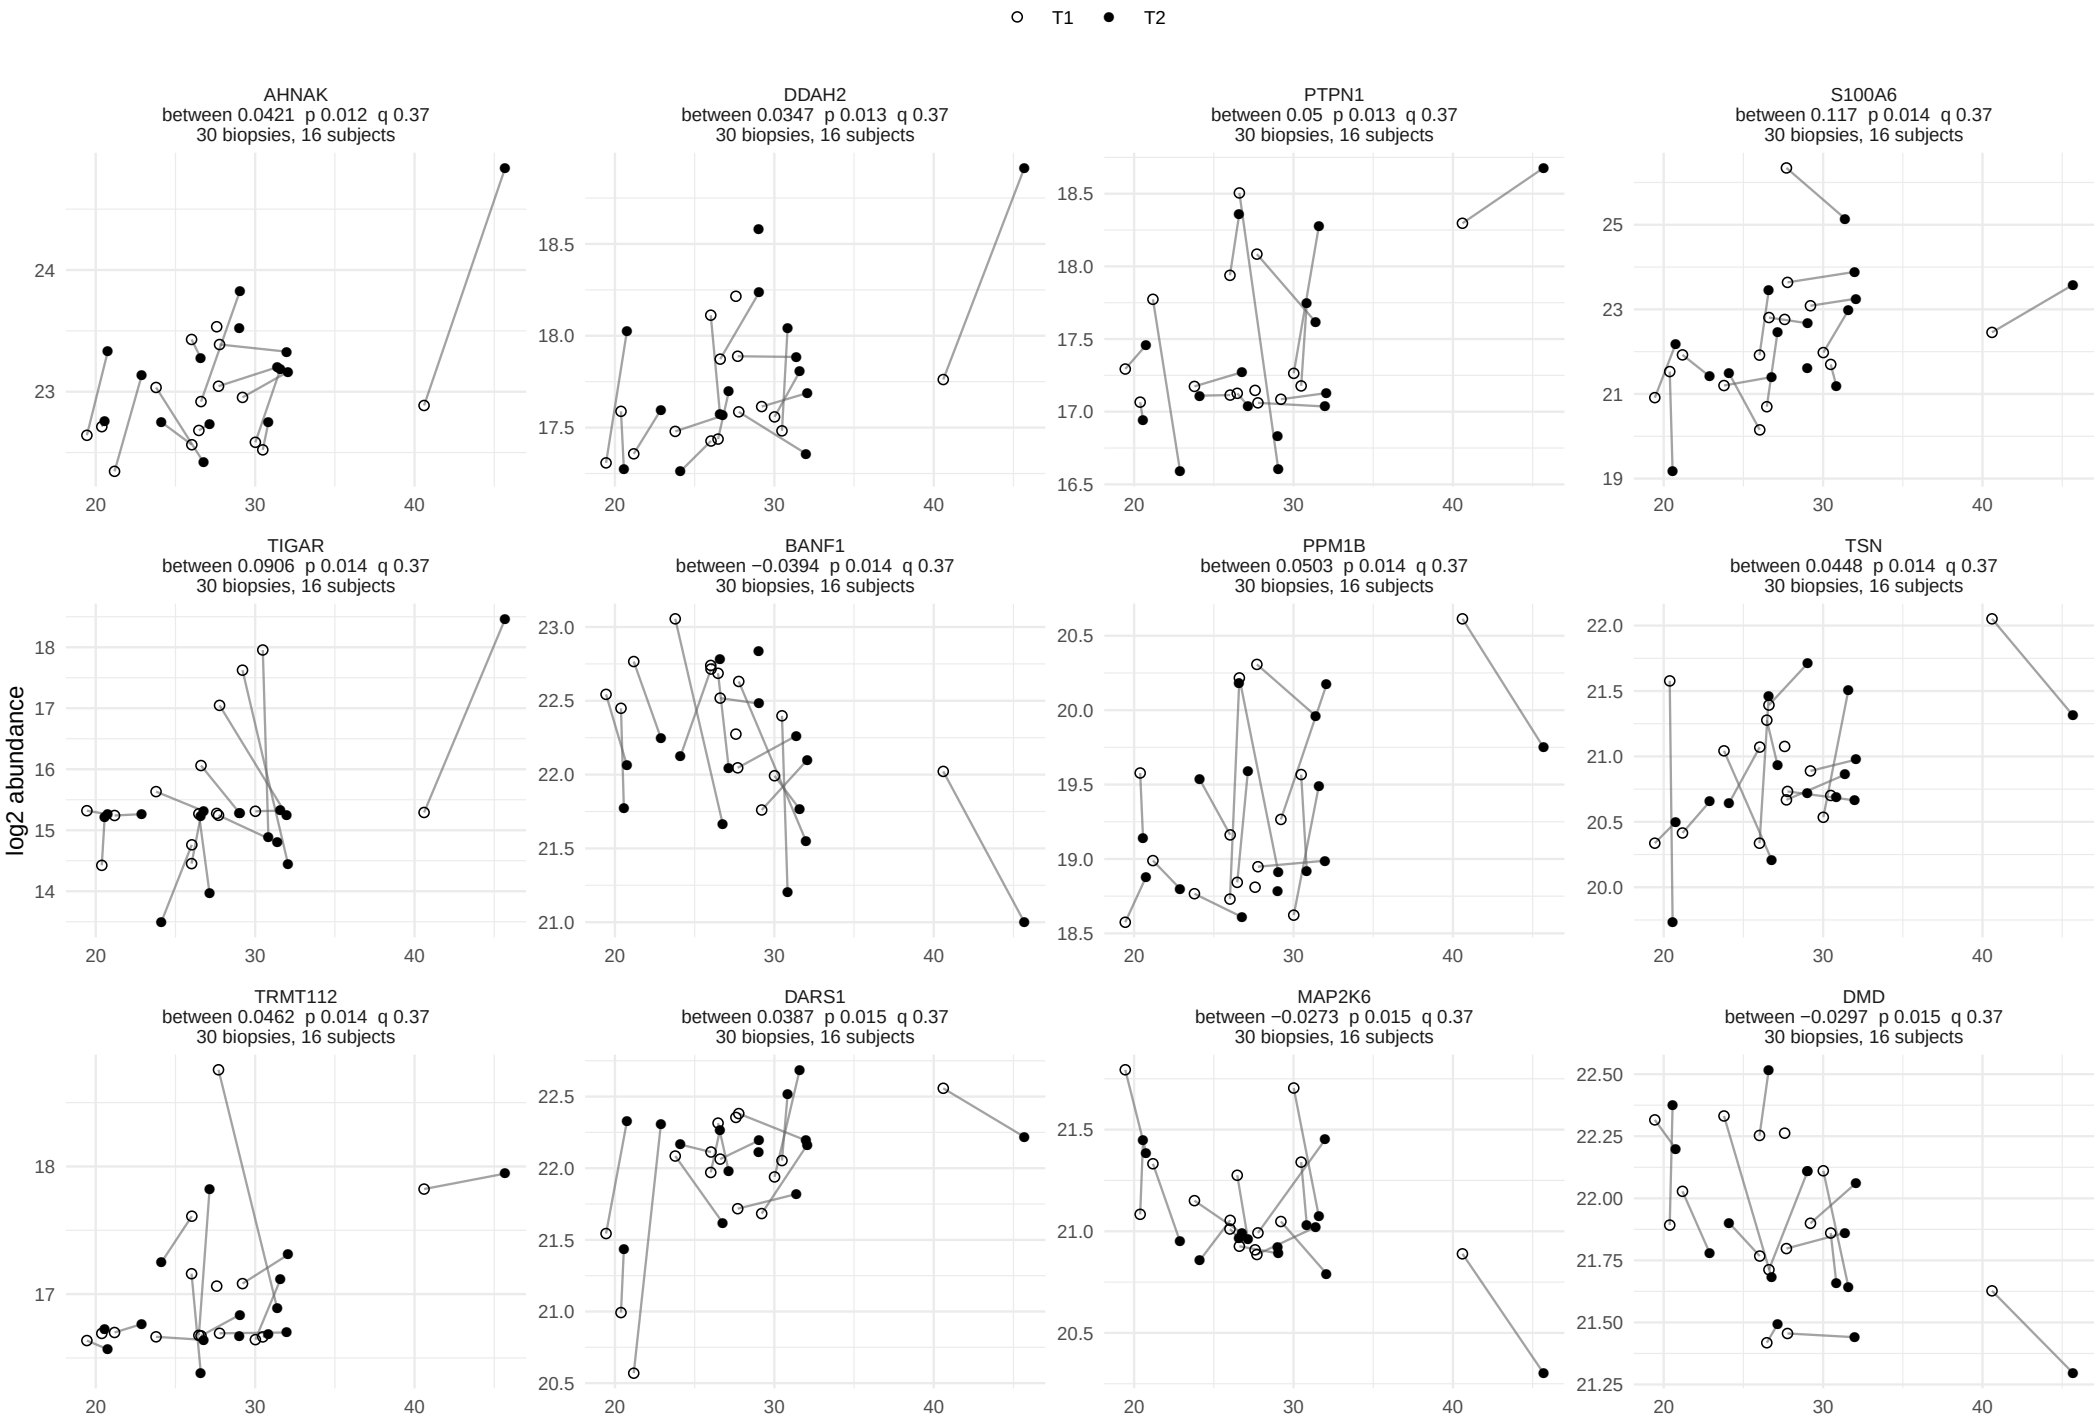

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

mcsa, between−person term


179 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 7 of 15.

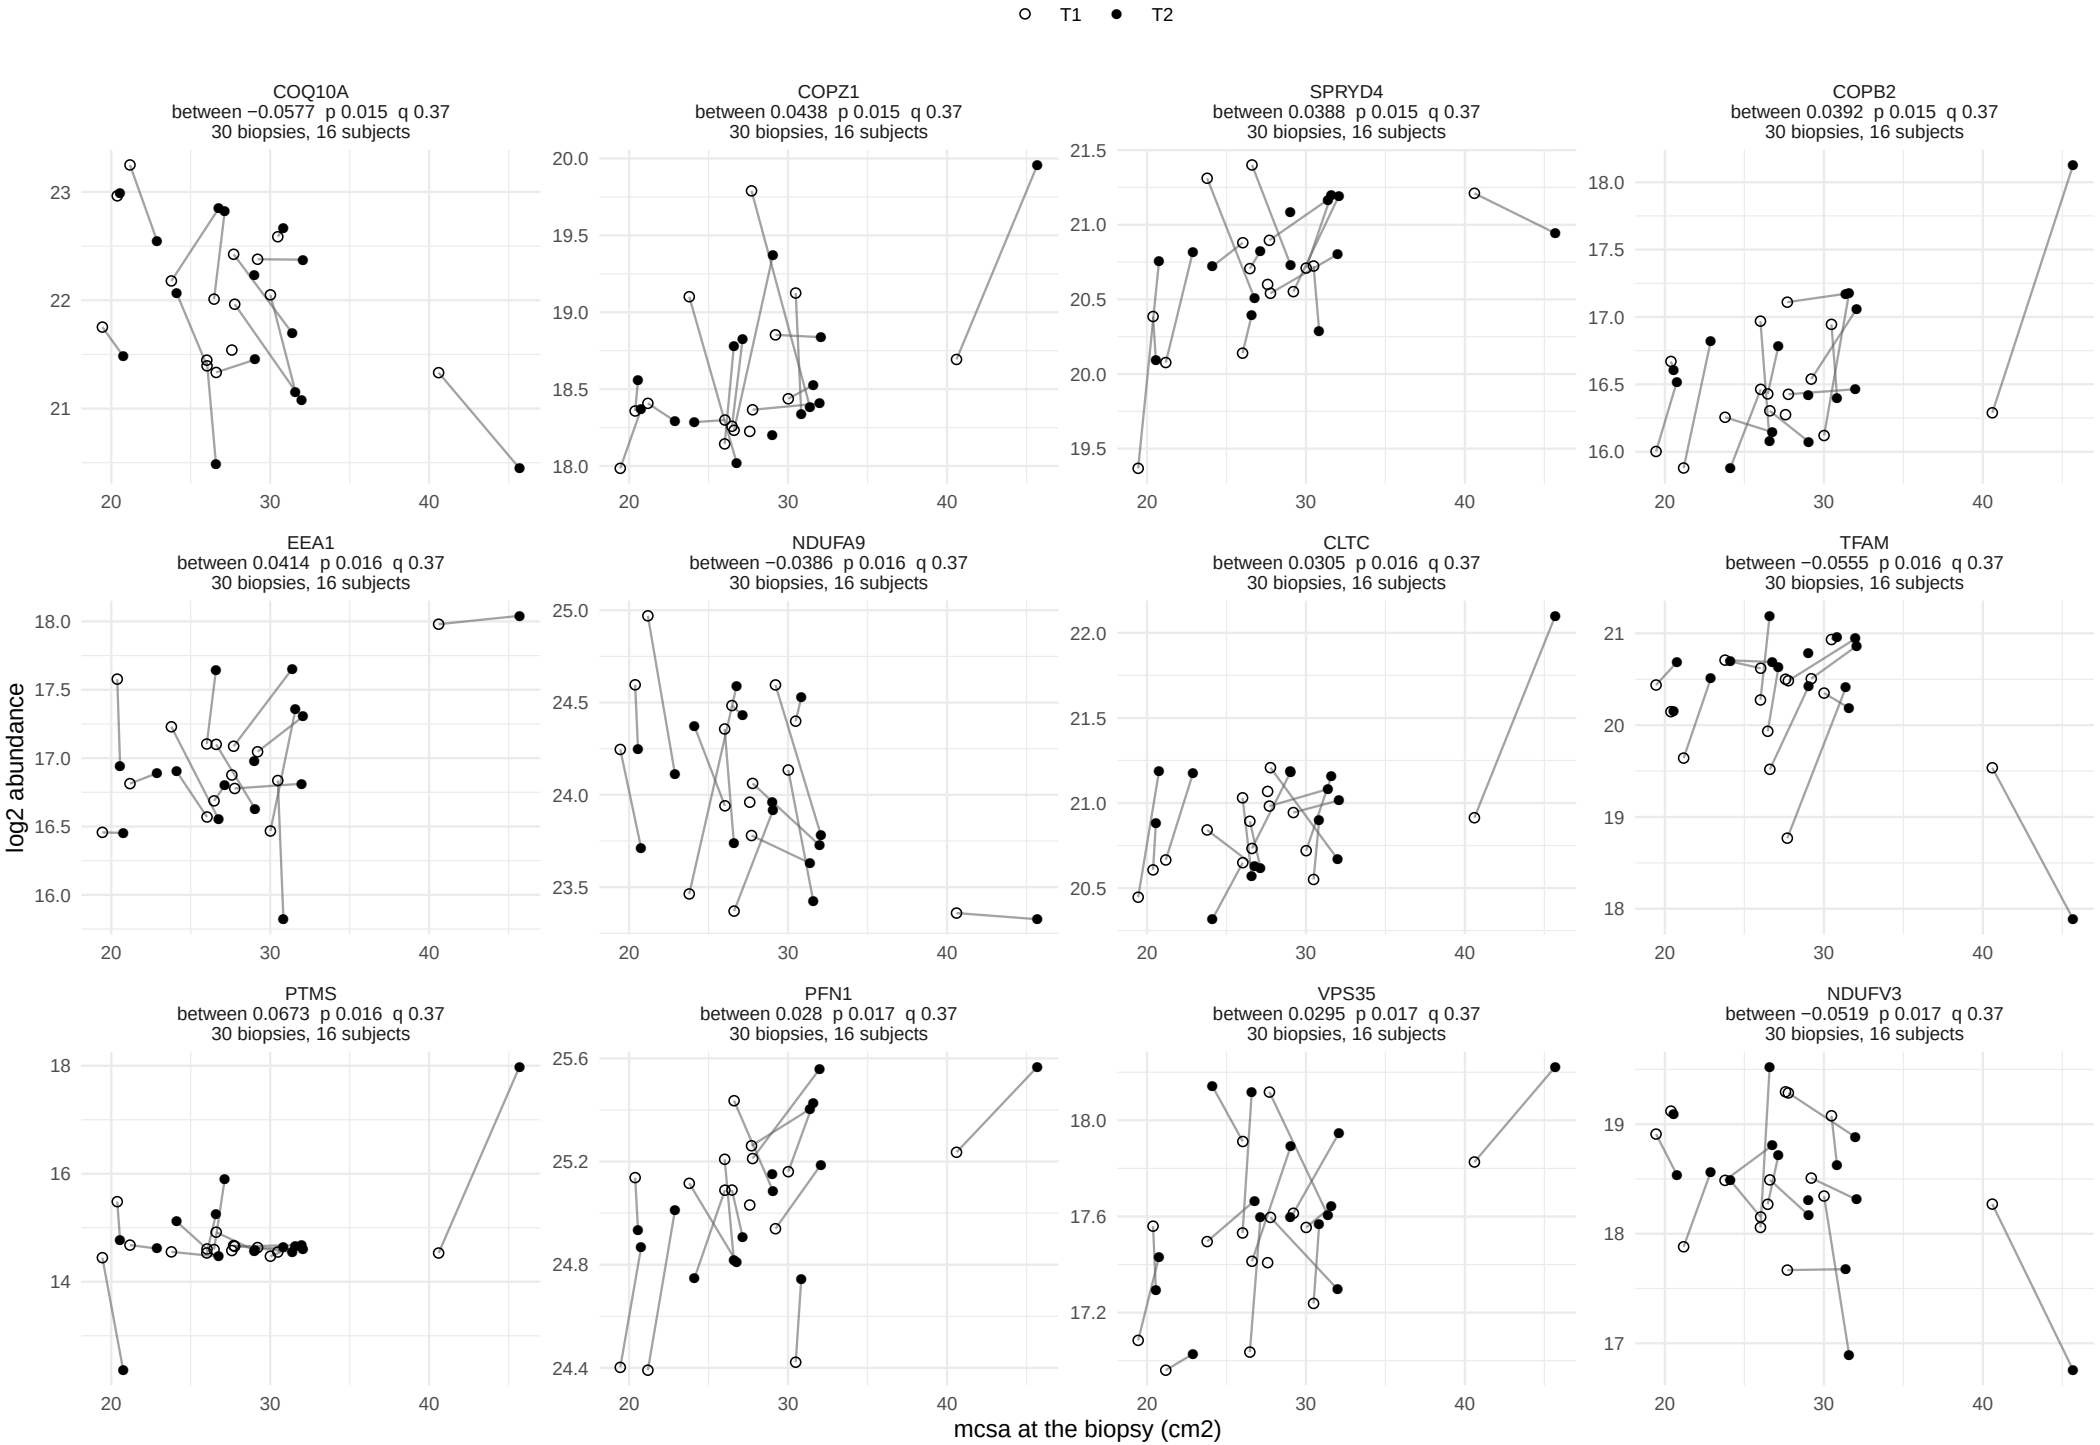

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

mcsa, between−person term


179 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 8 of 15.

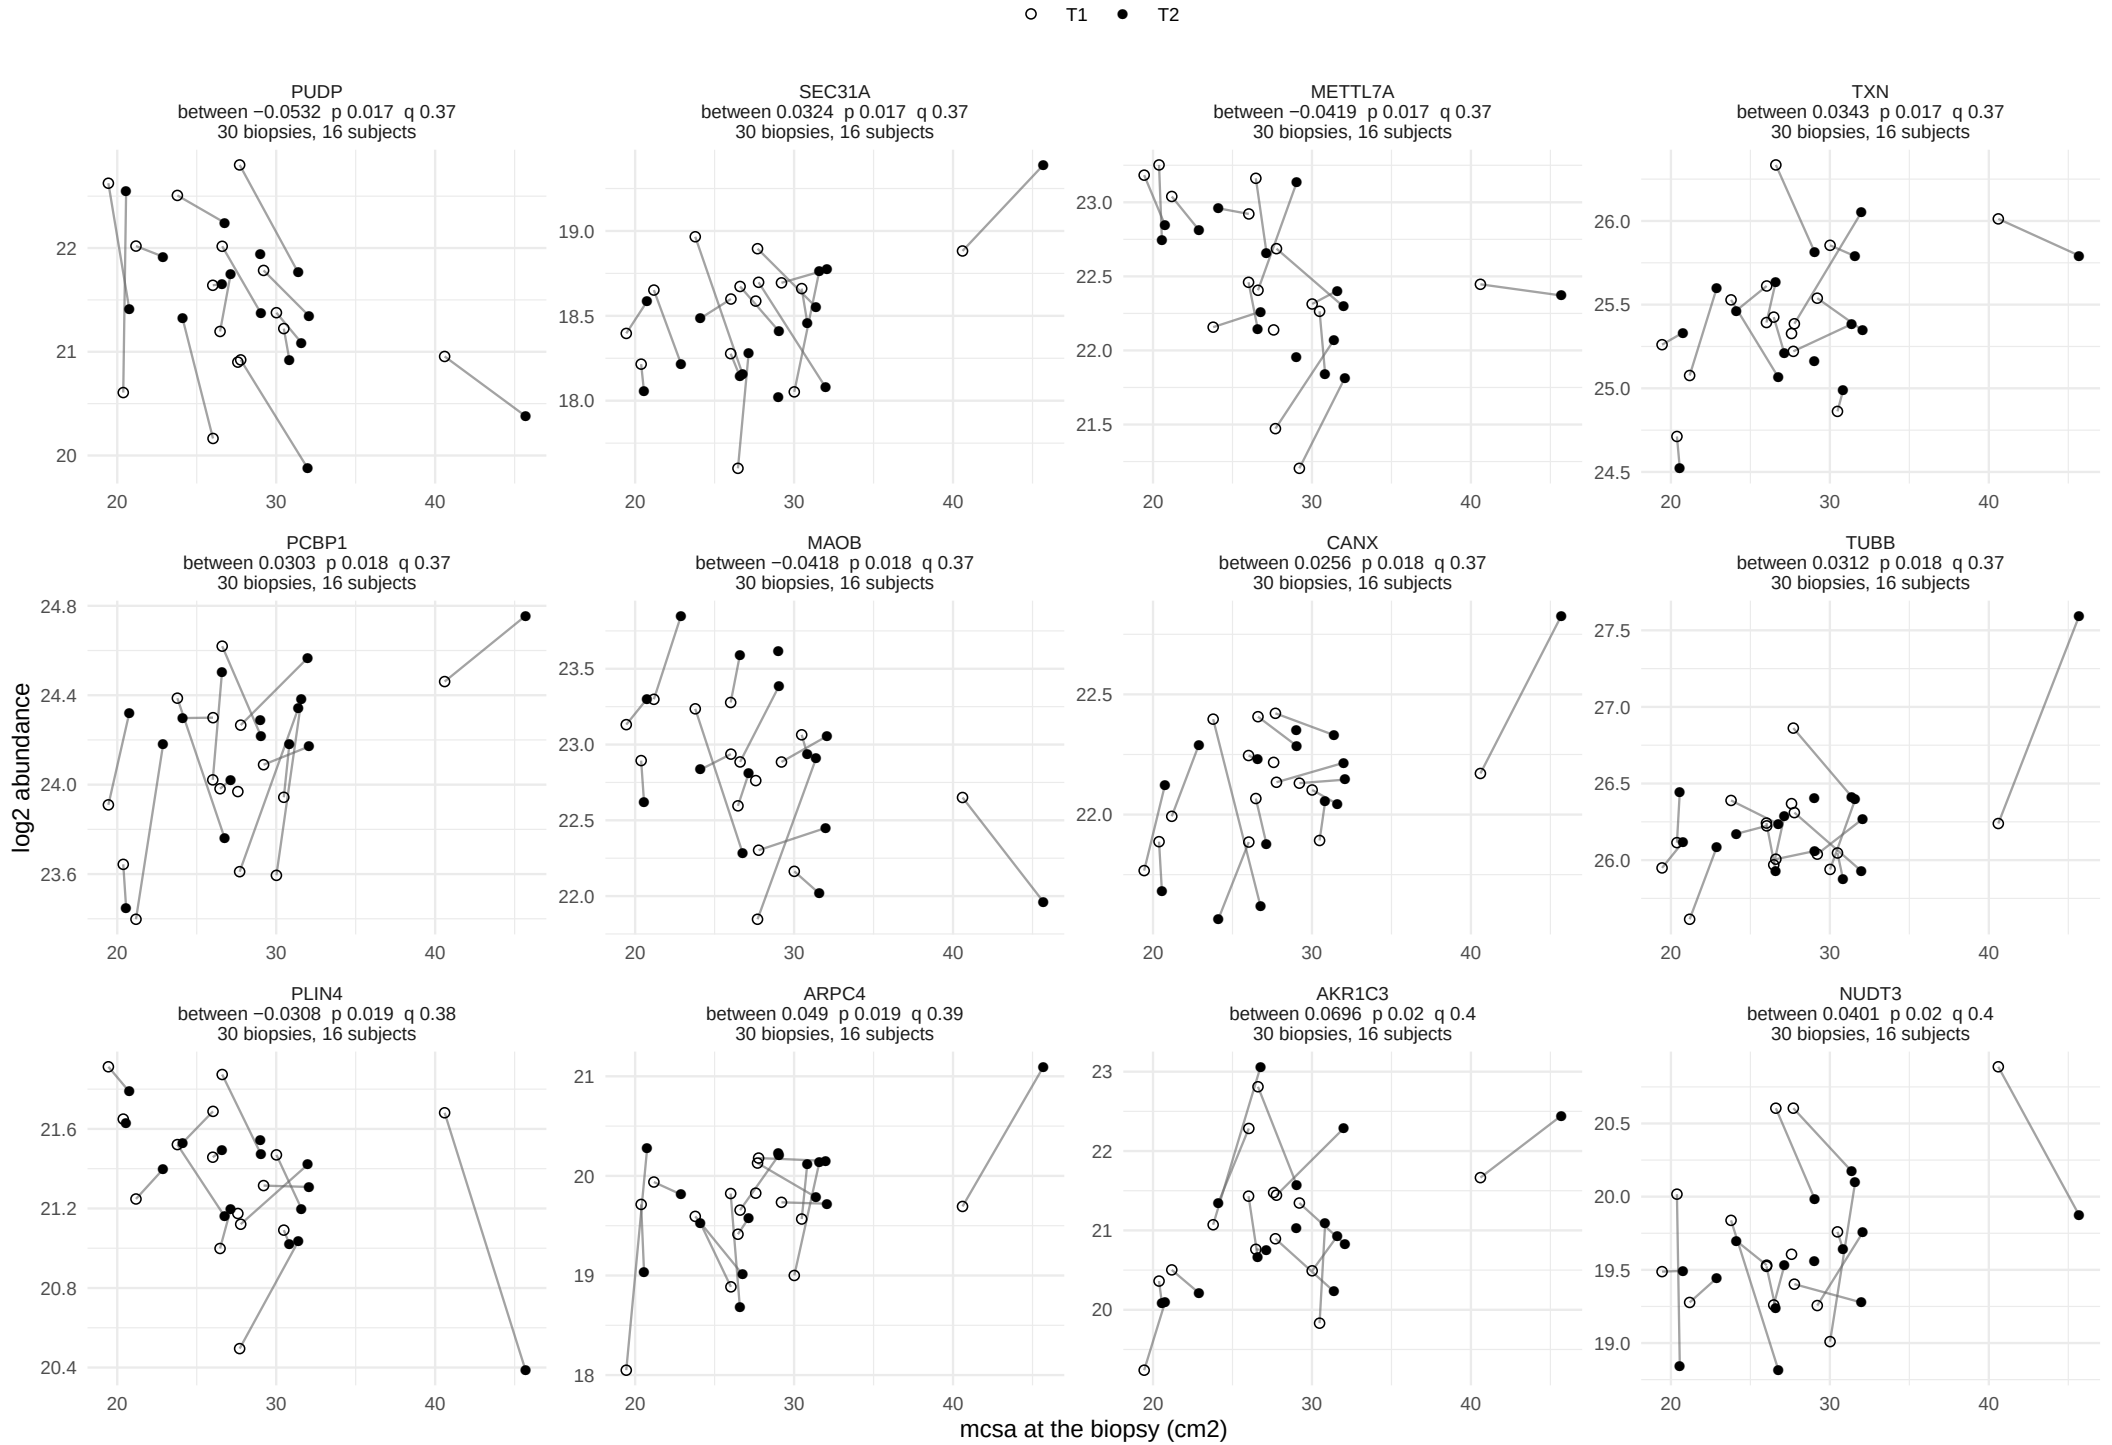

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

mcsa, between−person term


179 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 9 of 15.

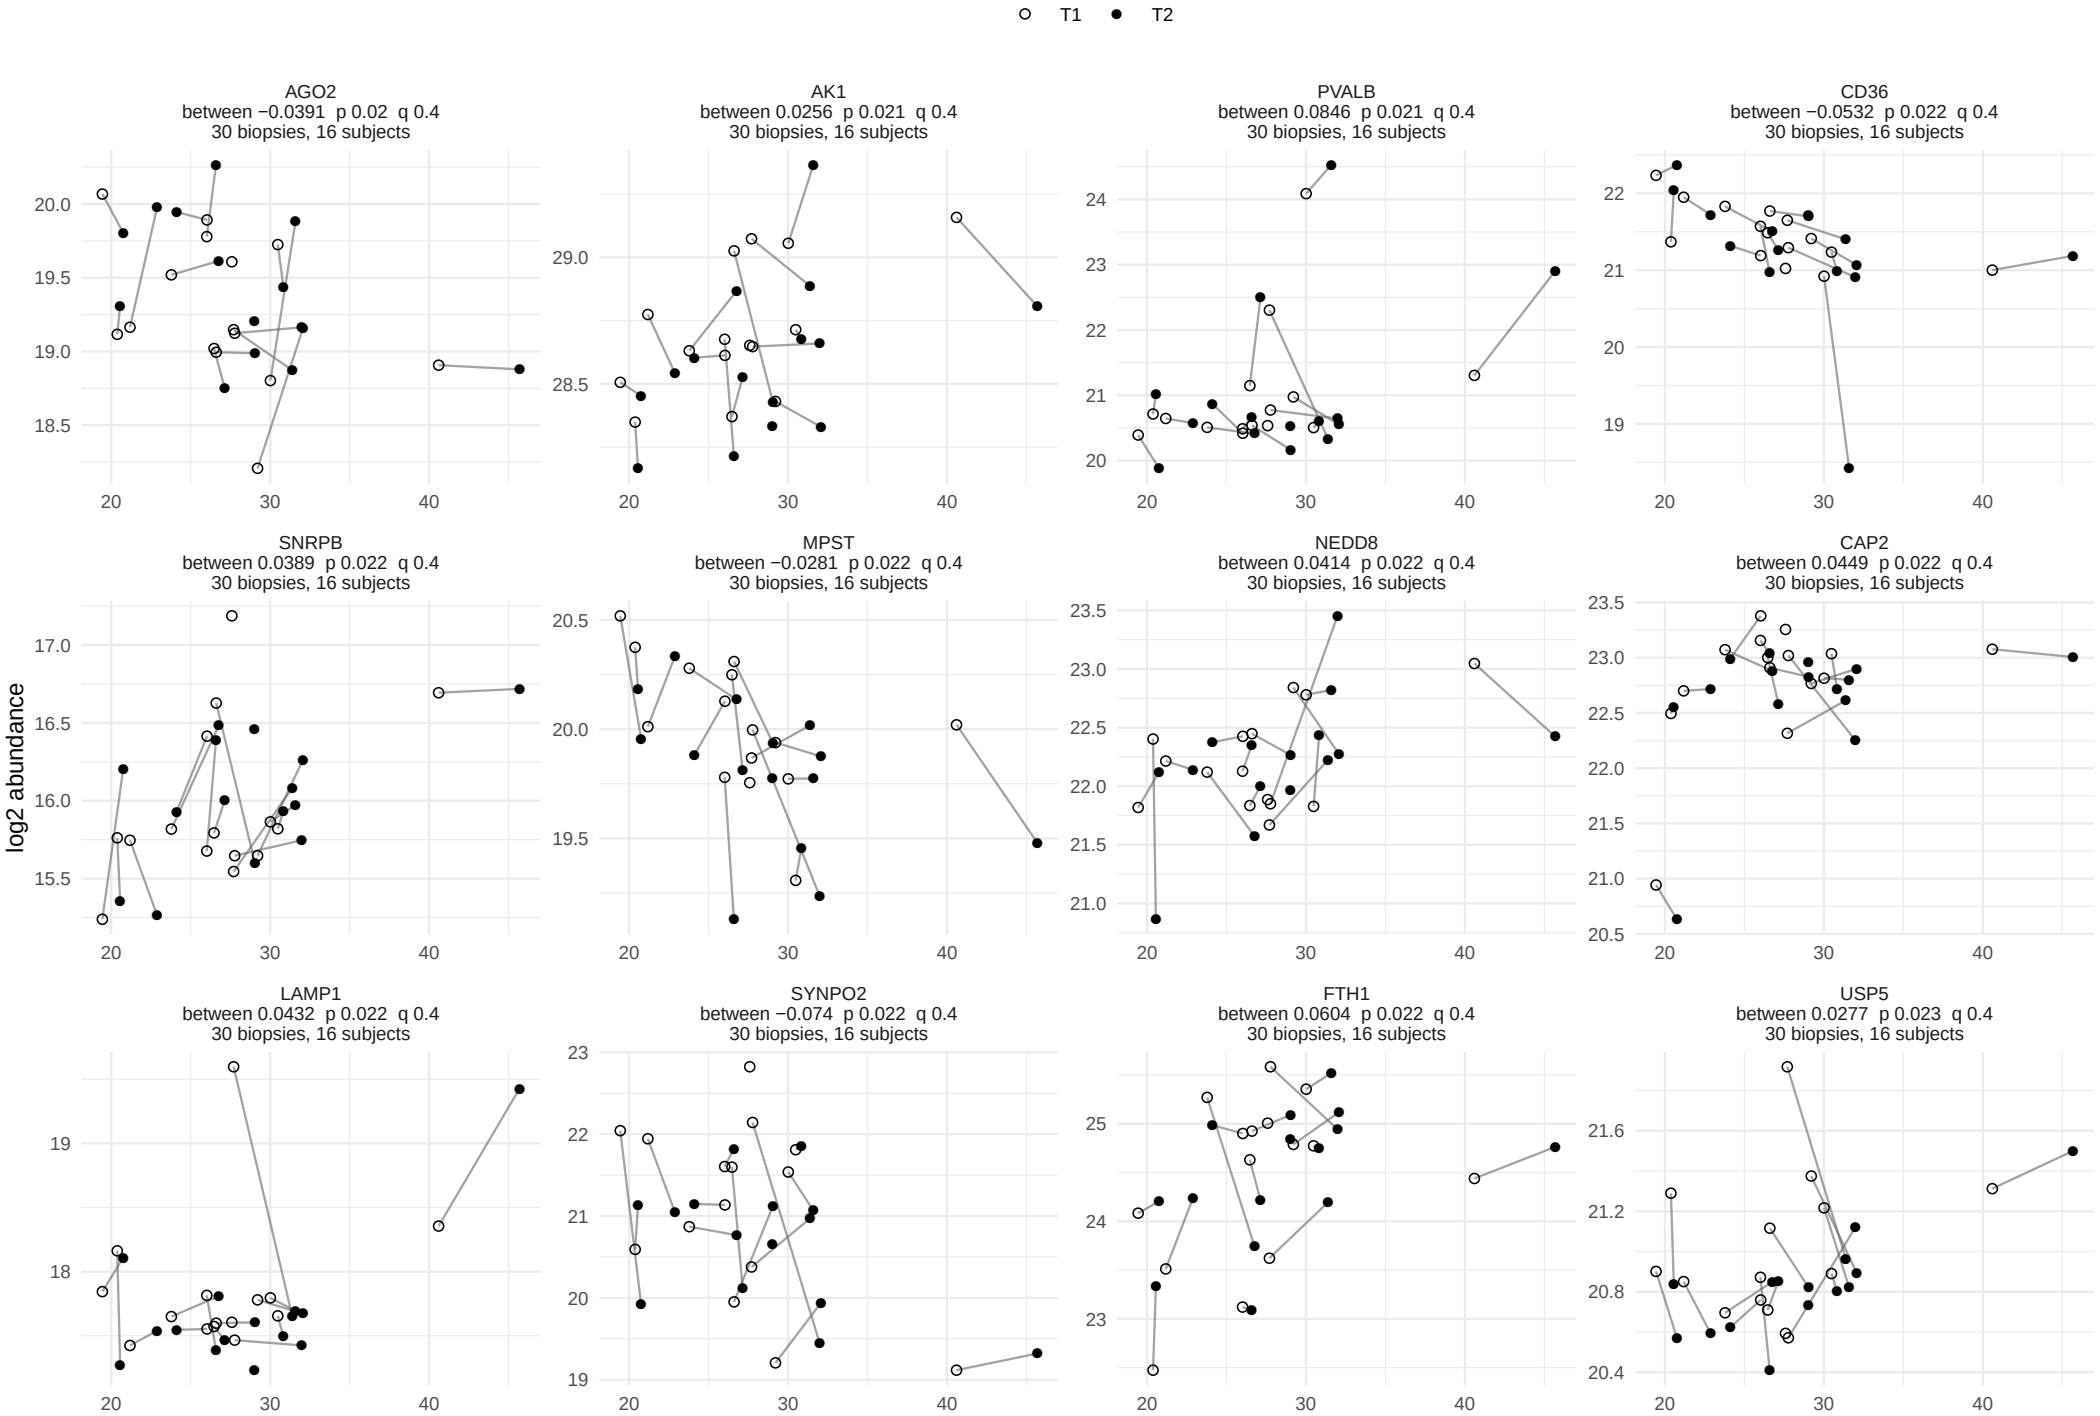

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

mcsa, between−person term


179 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 10 of 15.

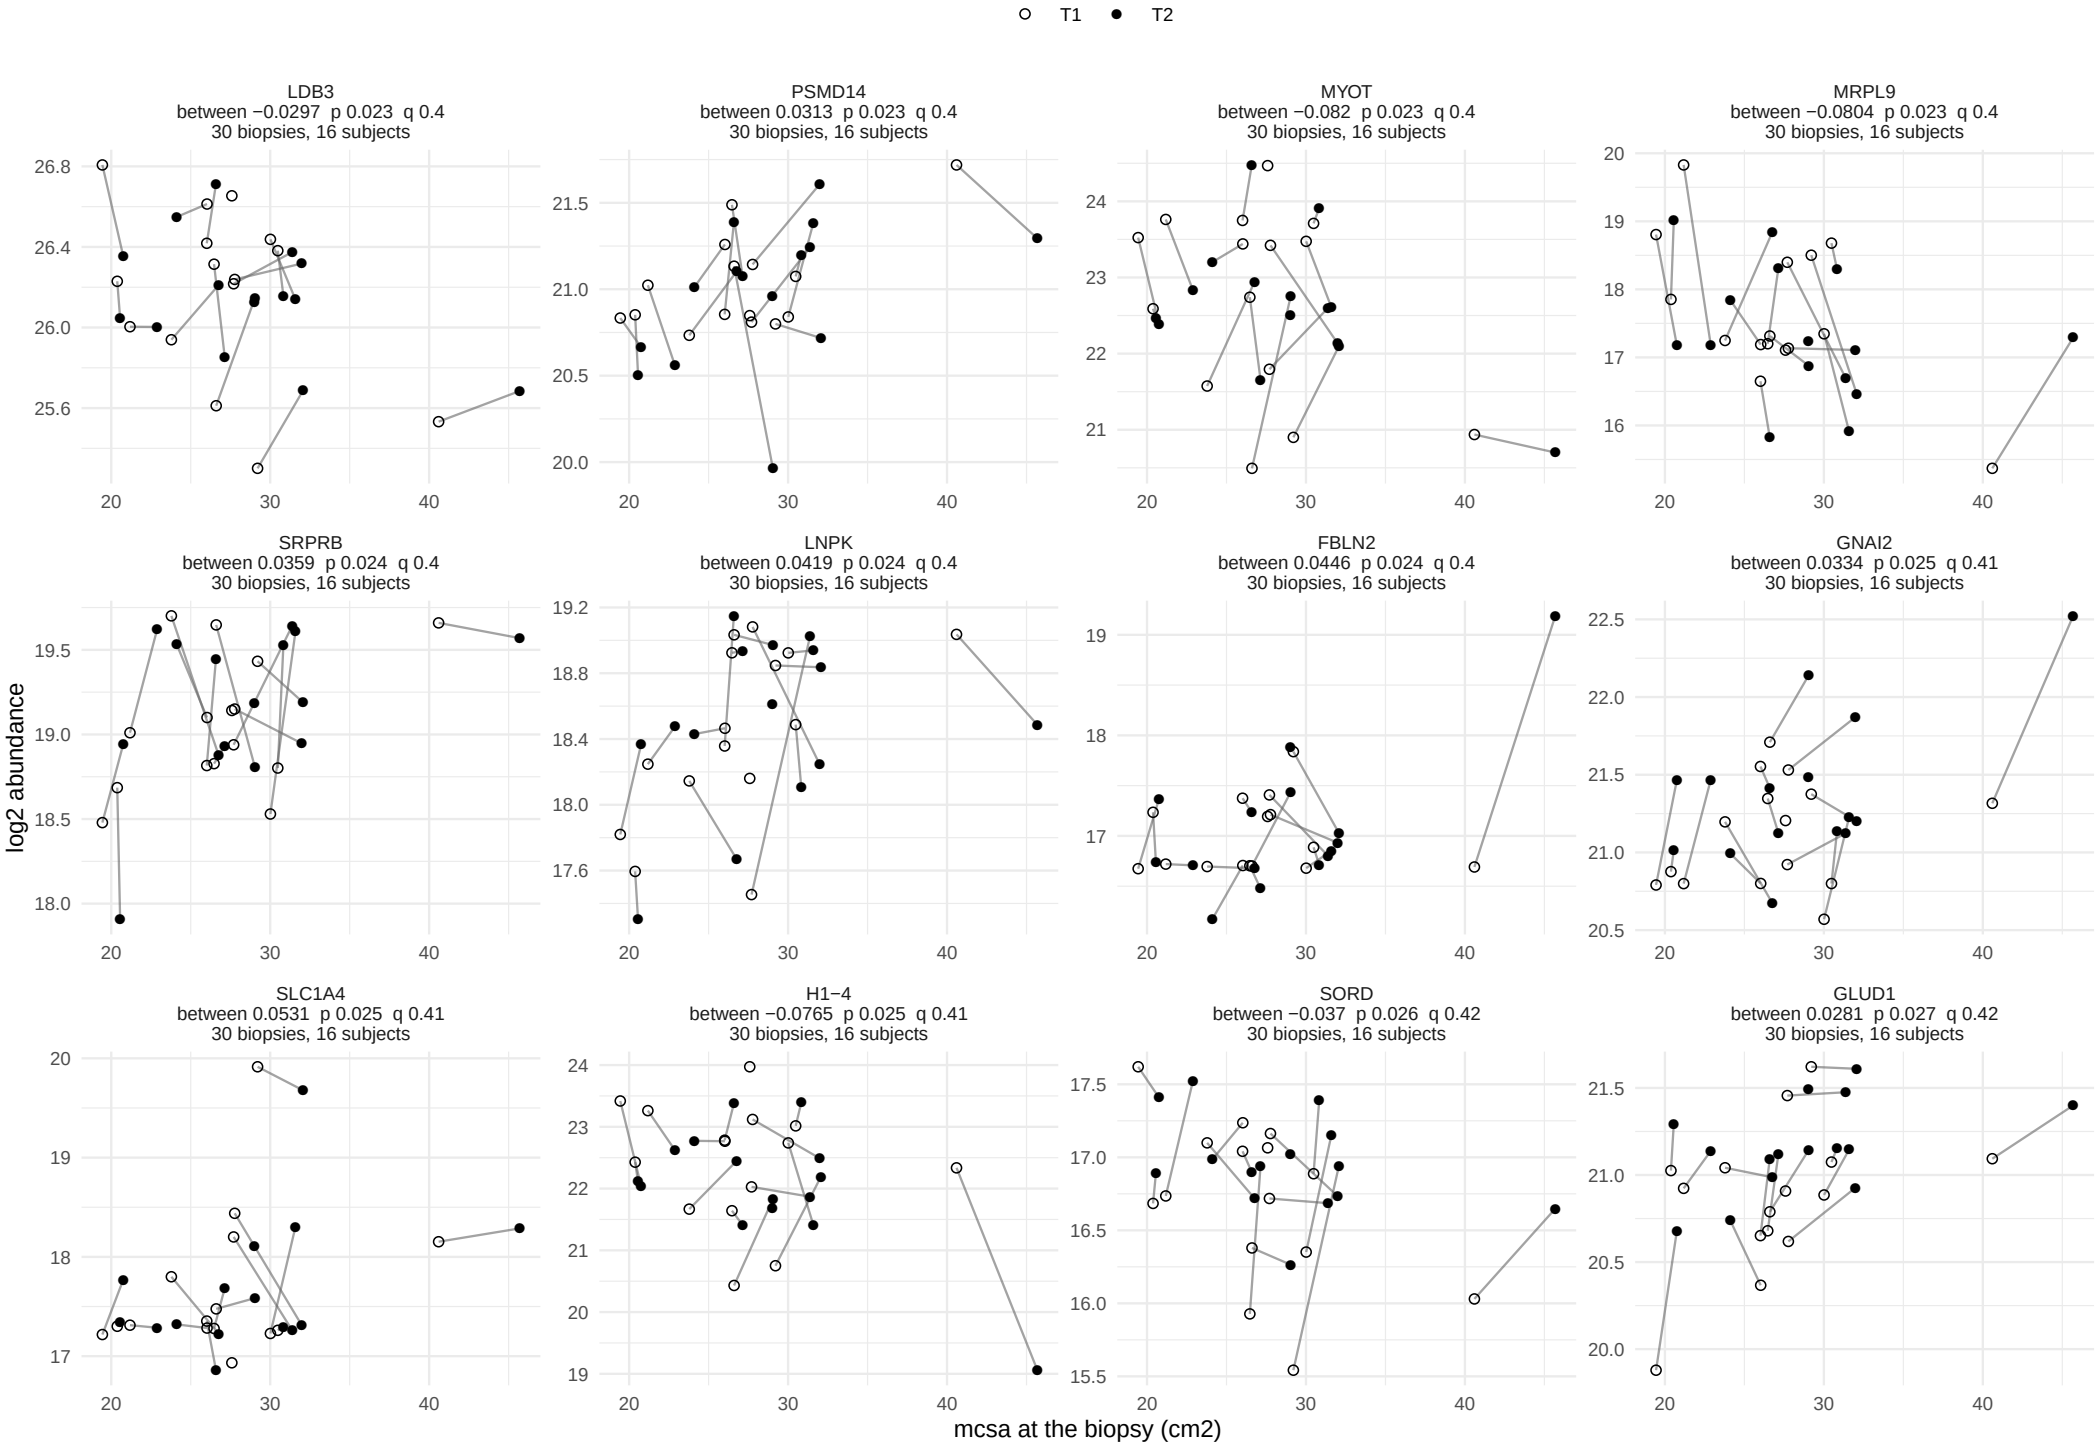

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

mcsa, between−person term


179 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 11 of 15.

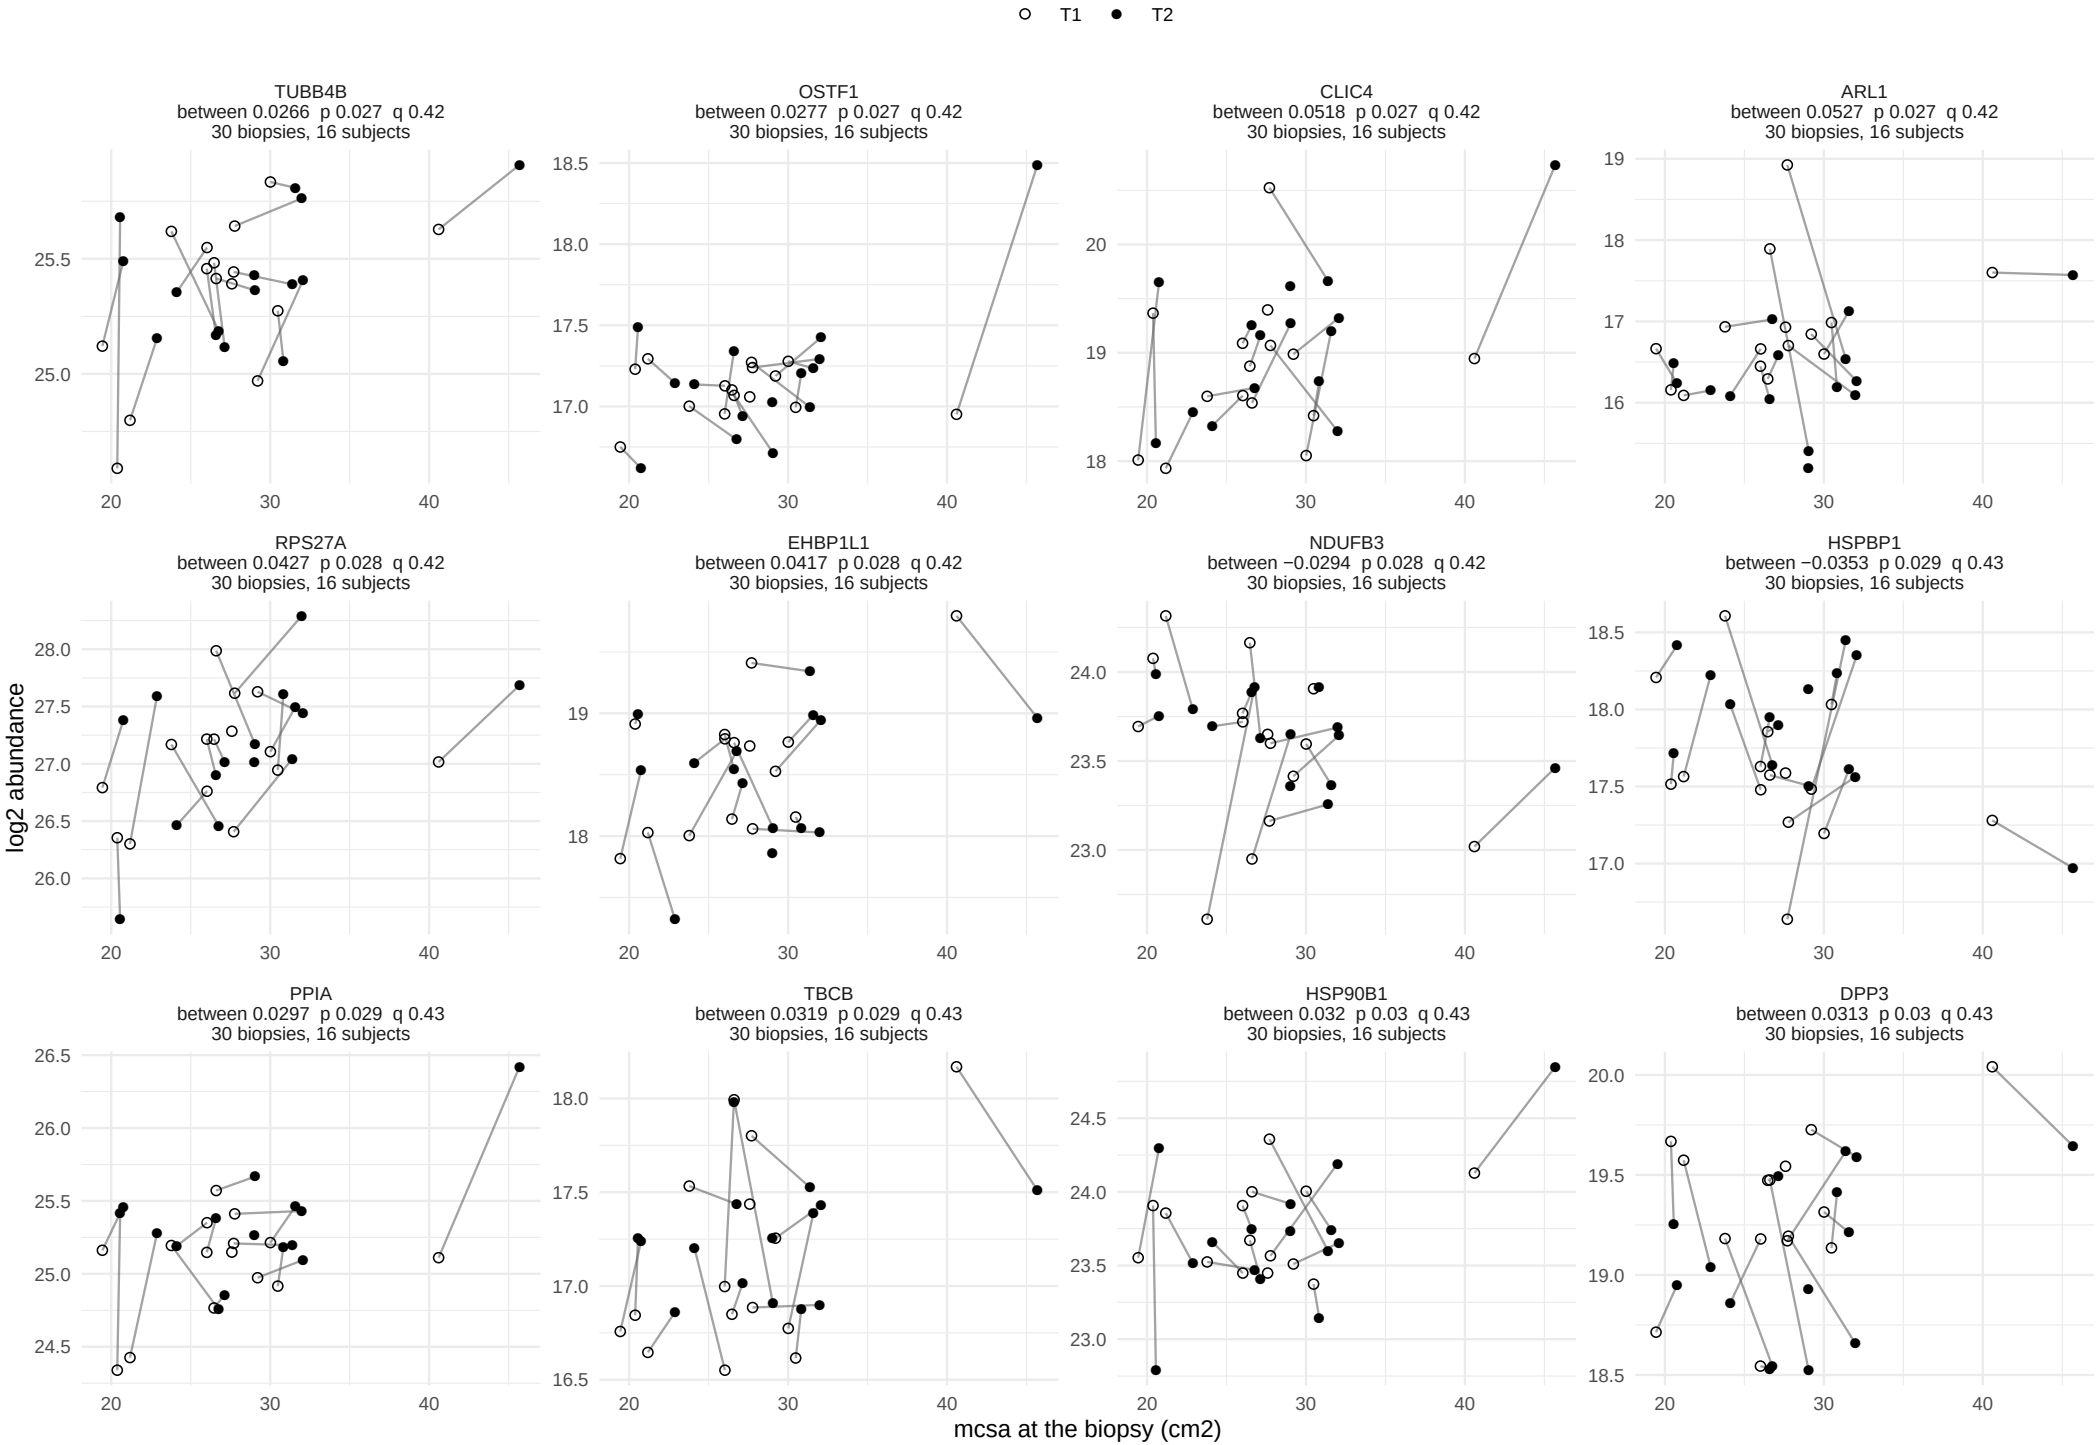

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

mcsa, between−person term


179 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 12 of 15.

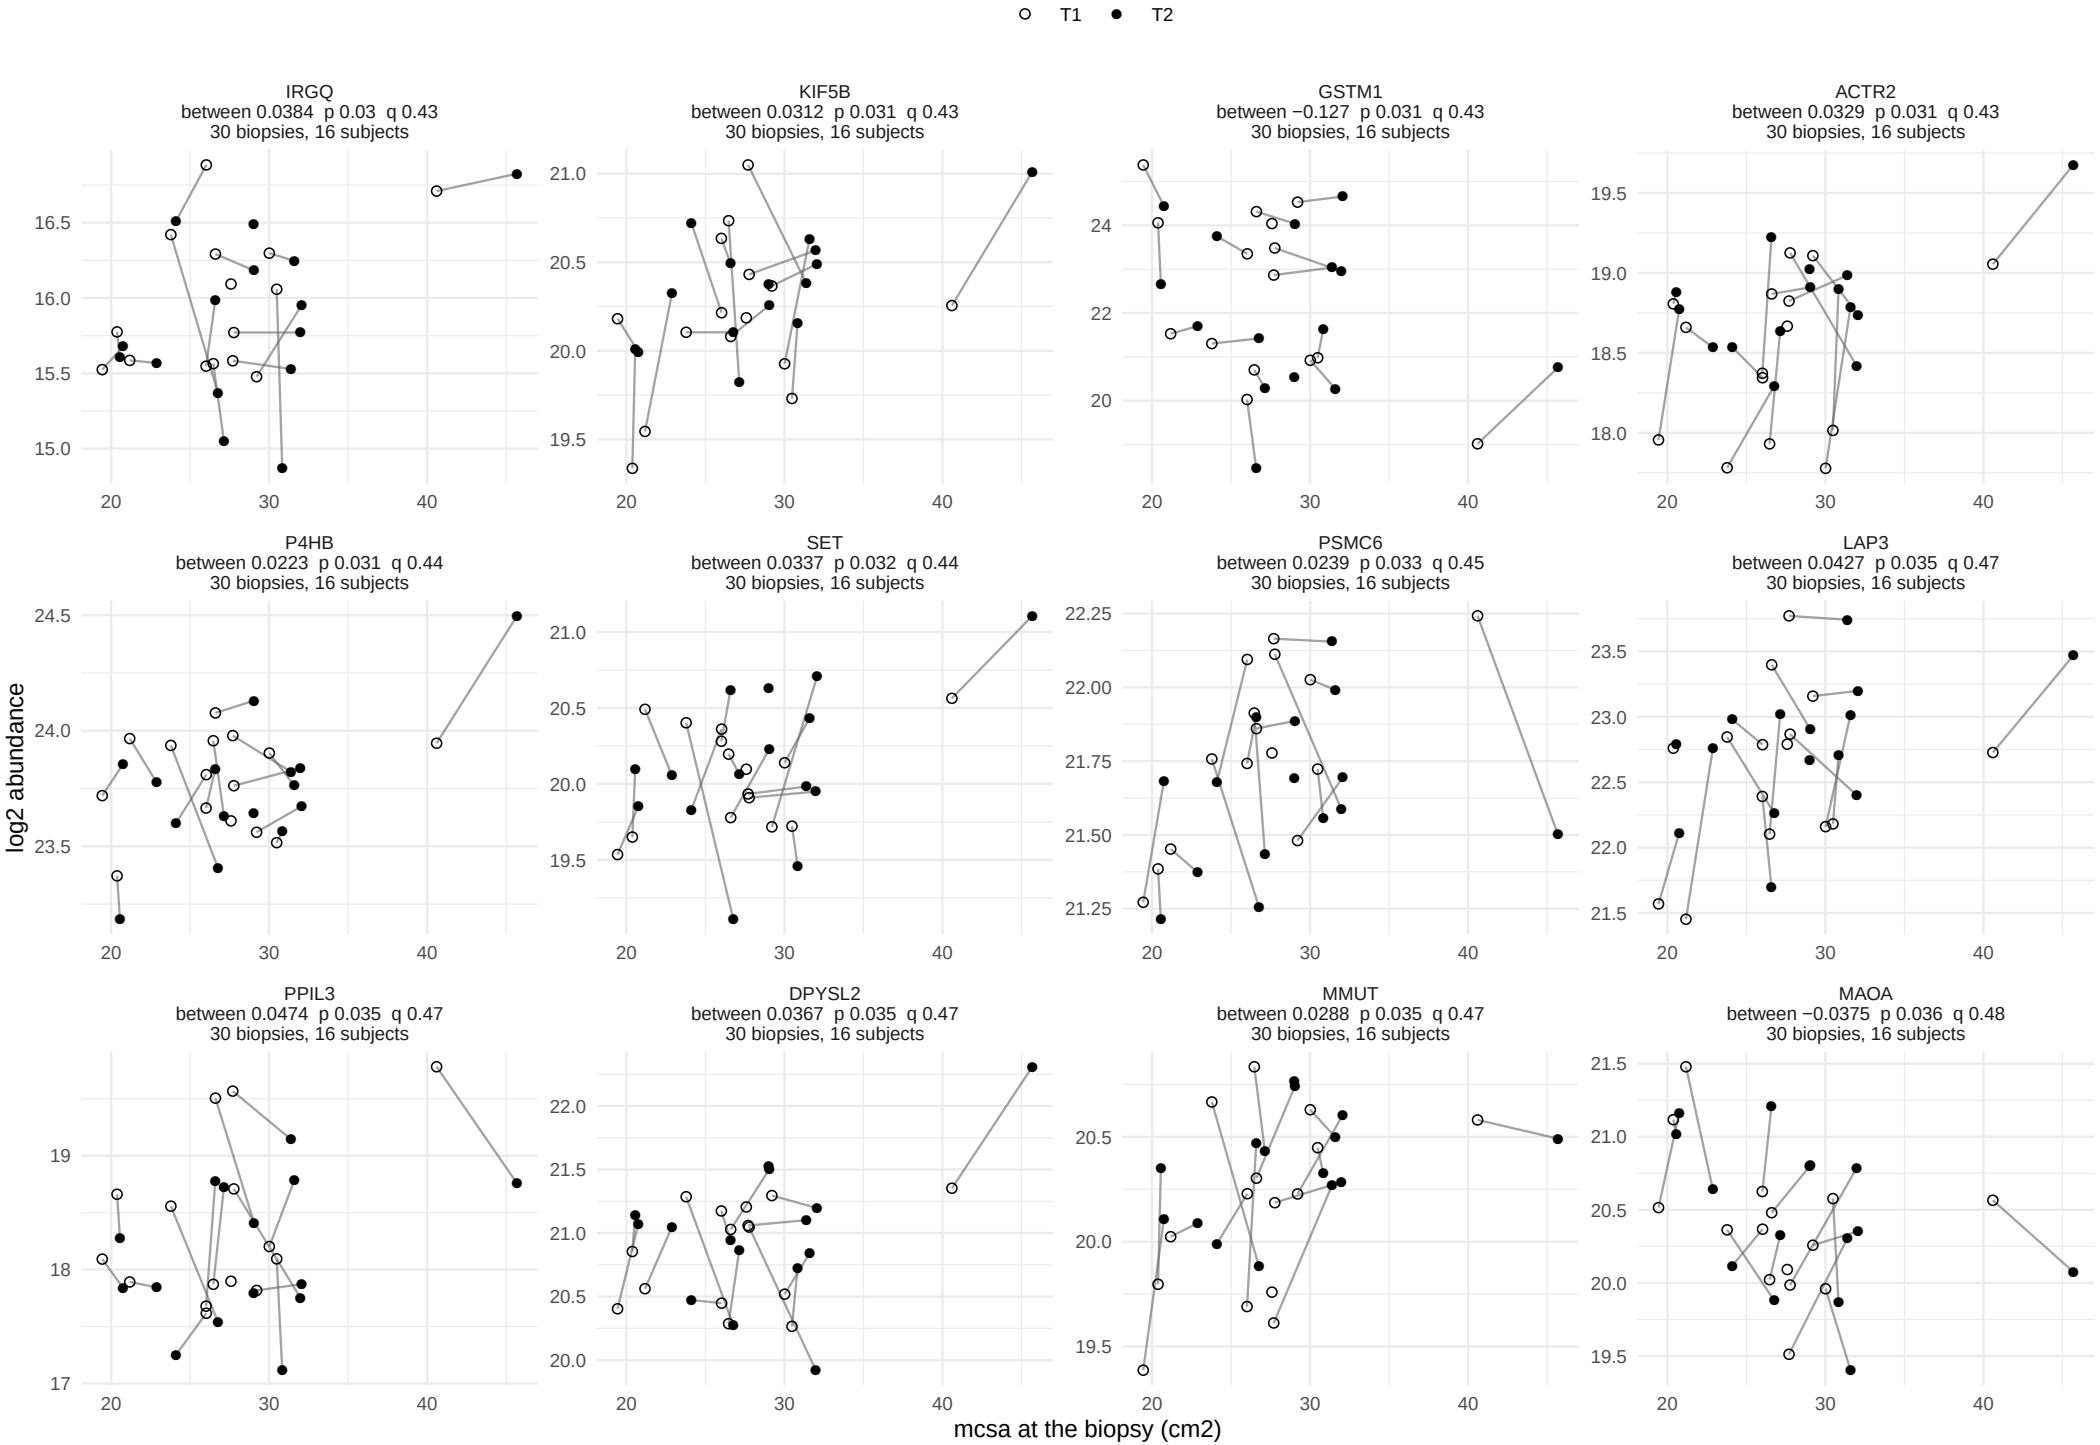

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

mcsa, between−person term


179 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 13 of 15.

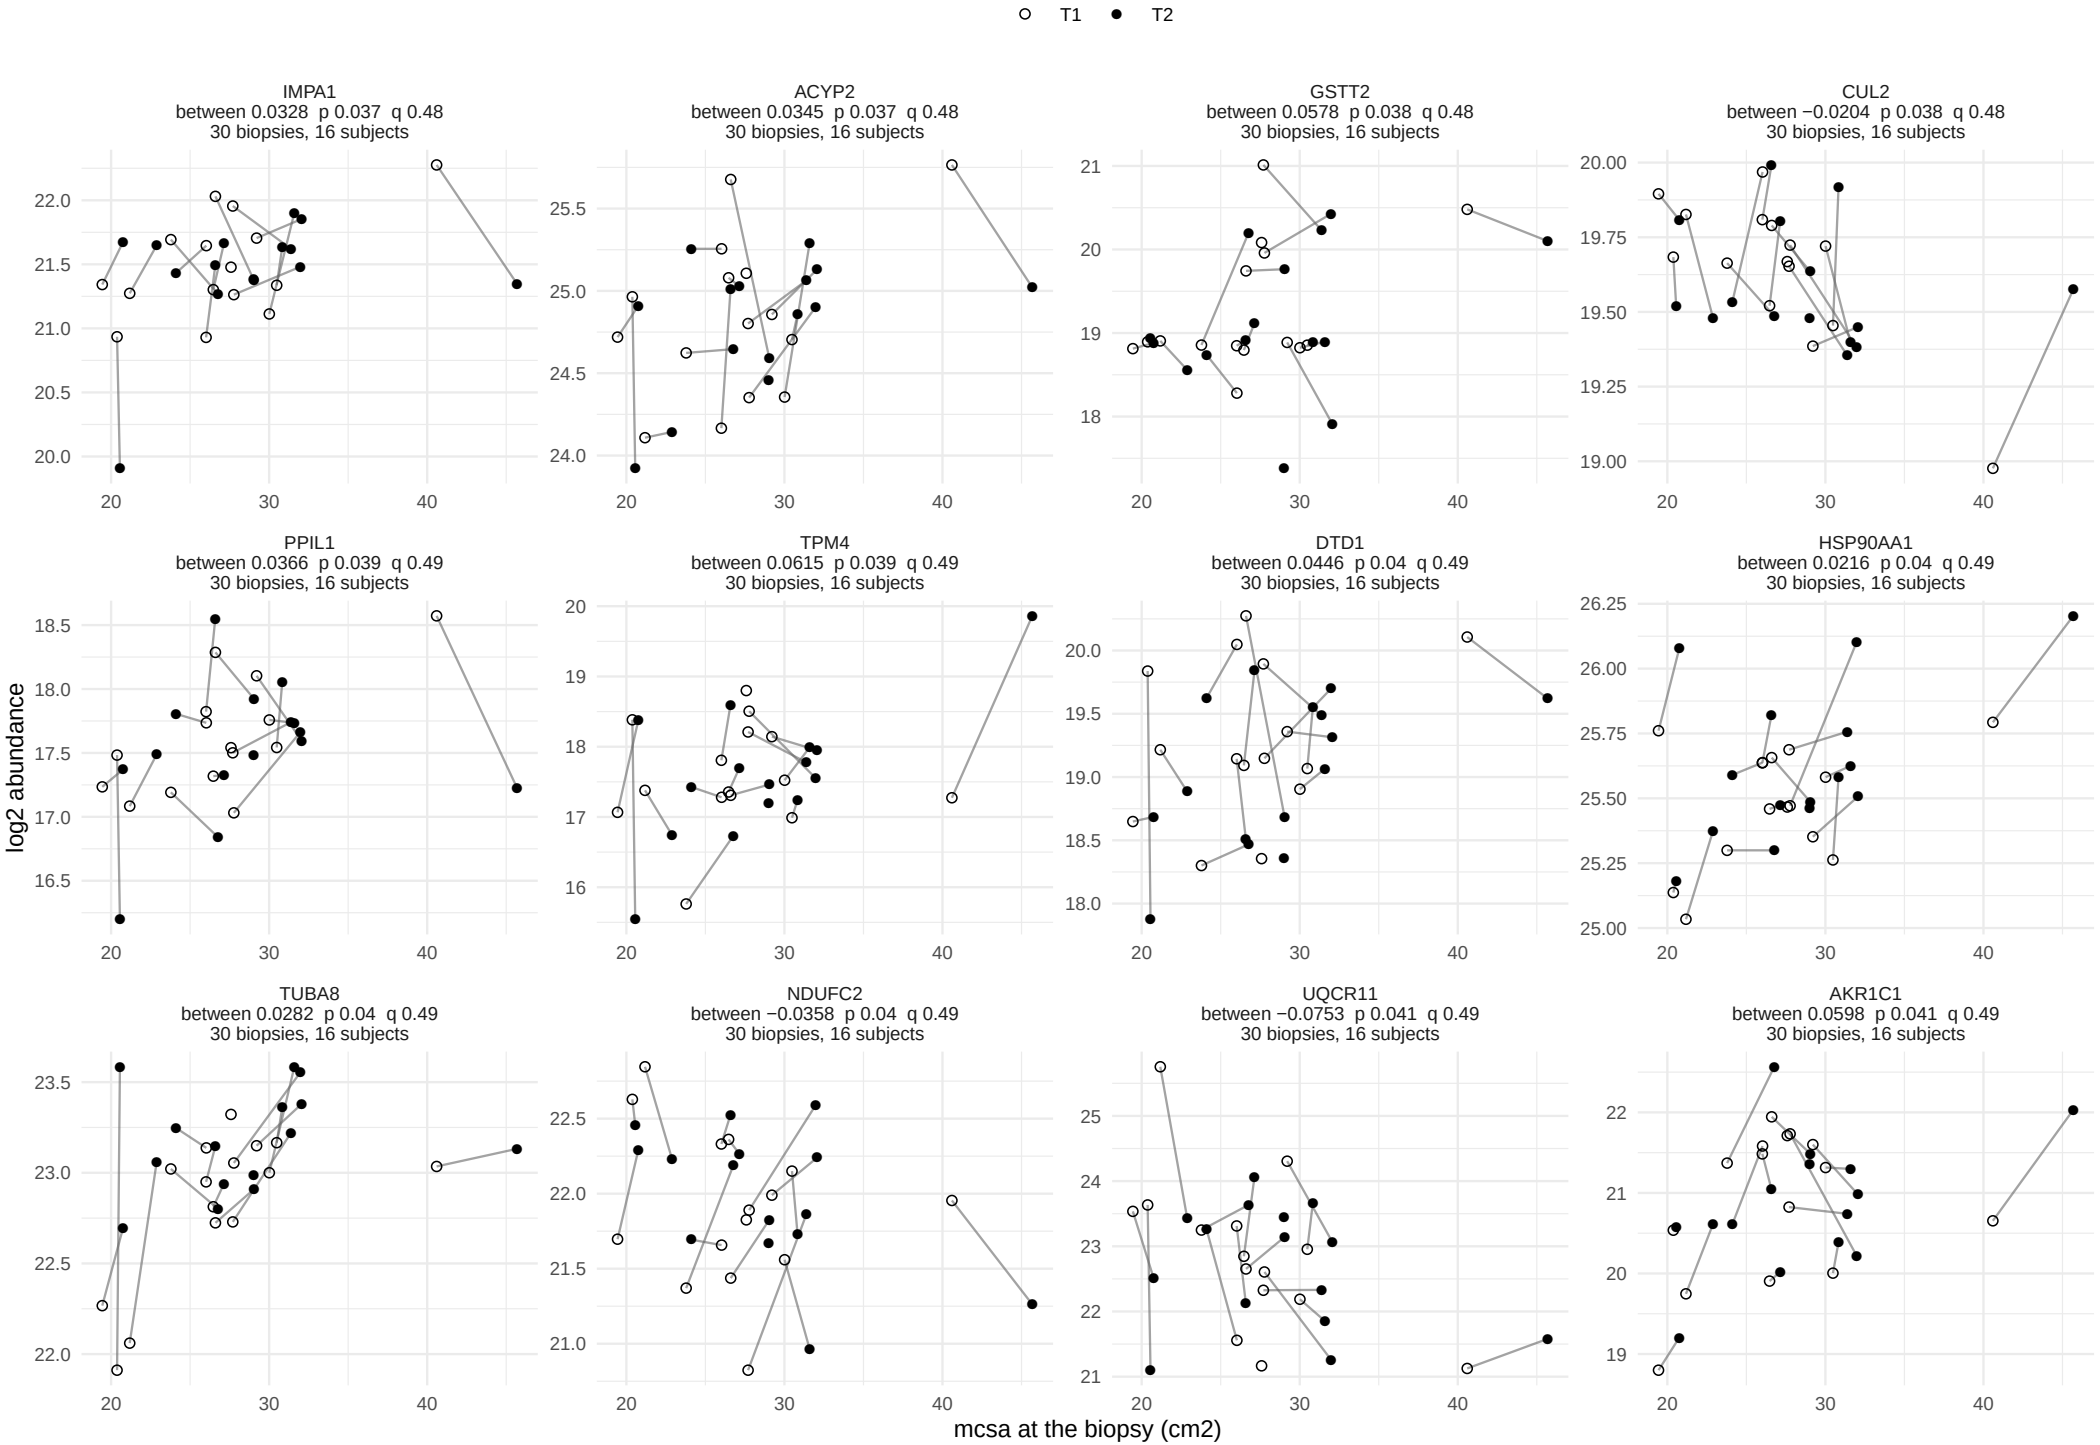

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

mcsa, between−person term


179 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 14 of 15.

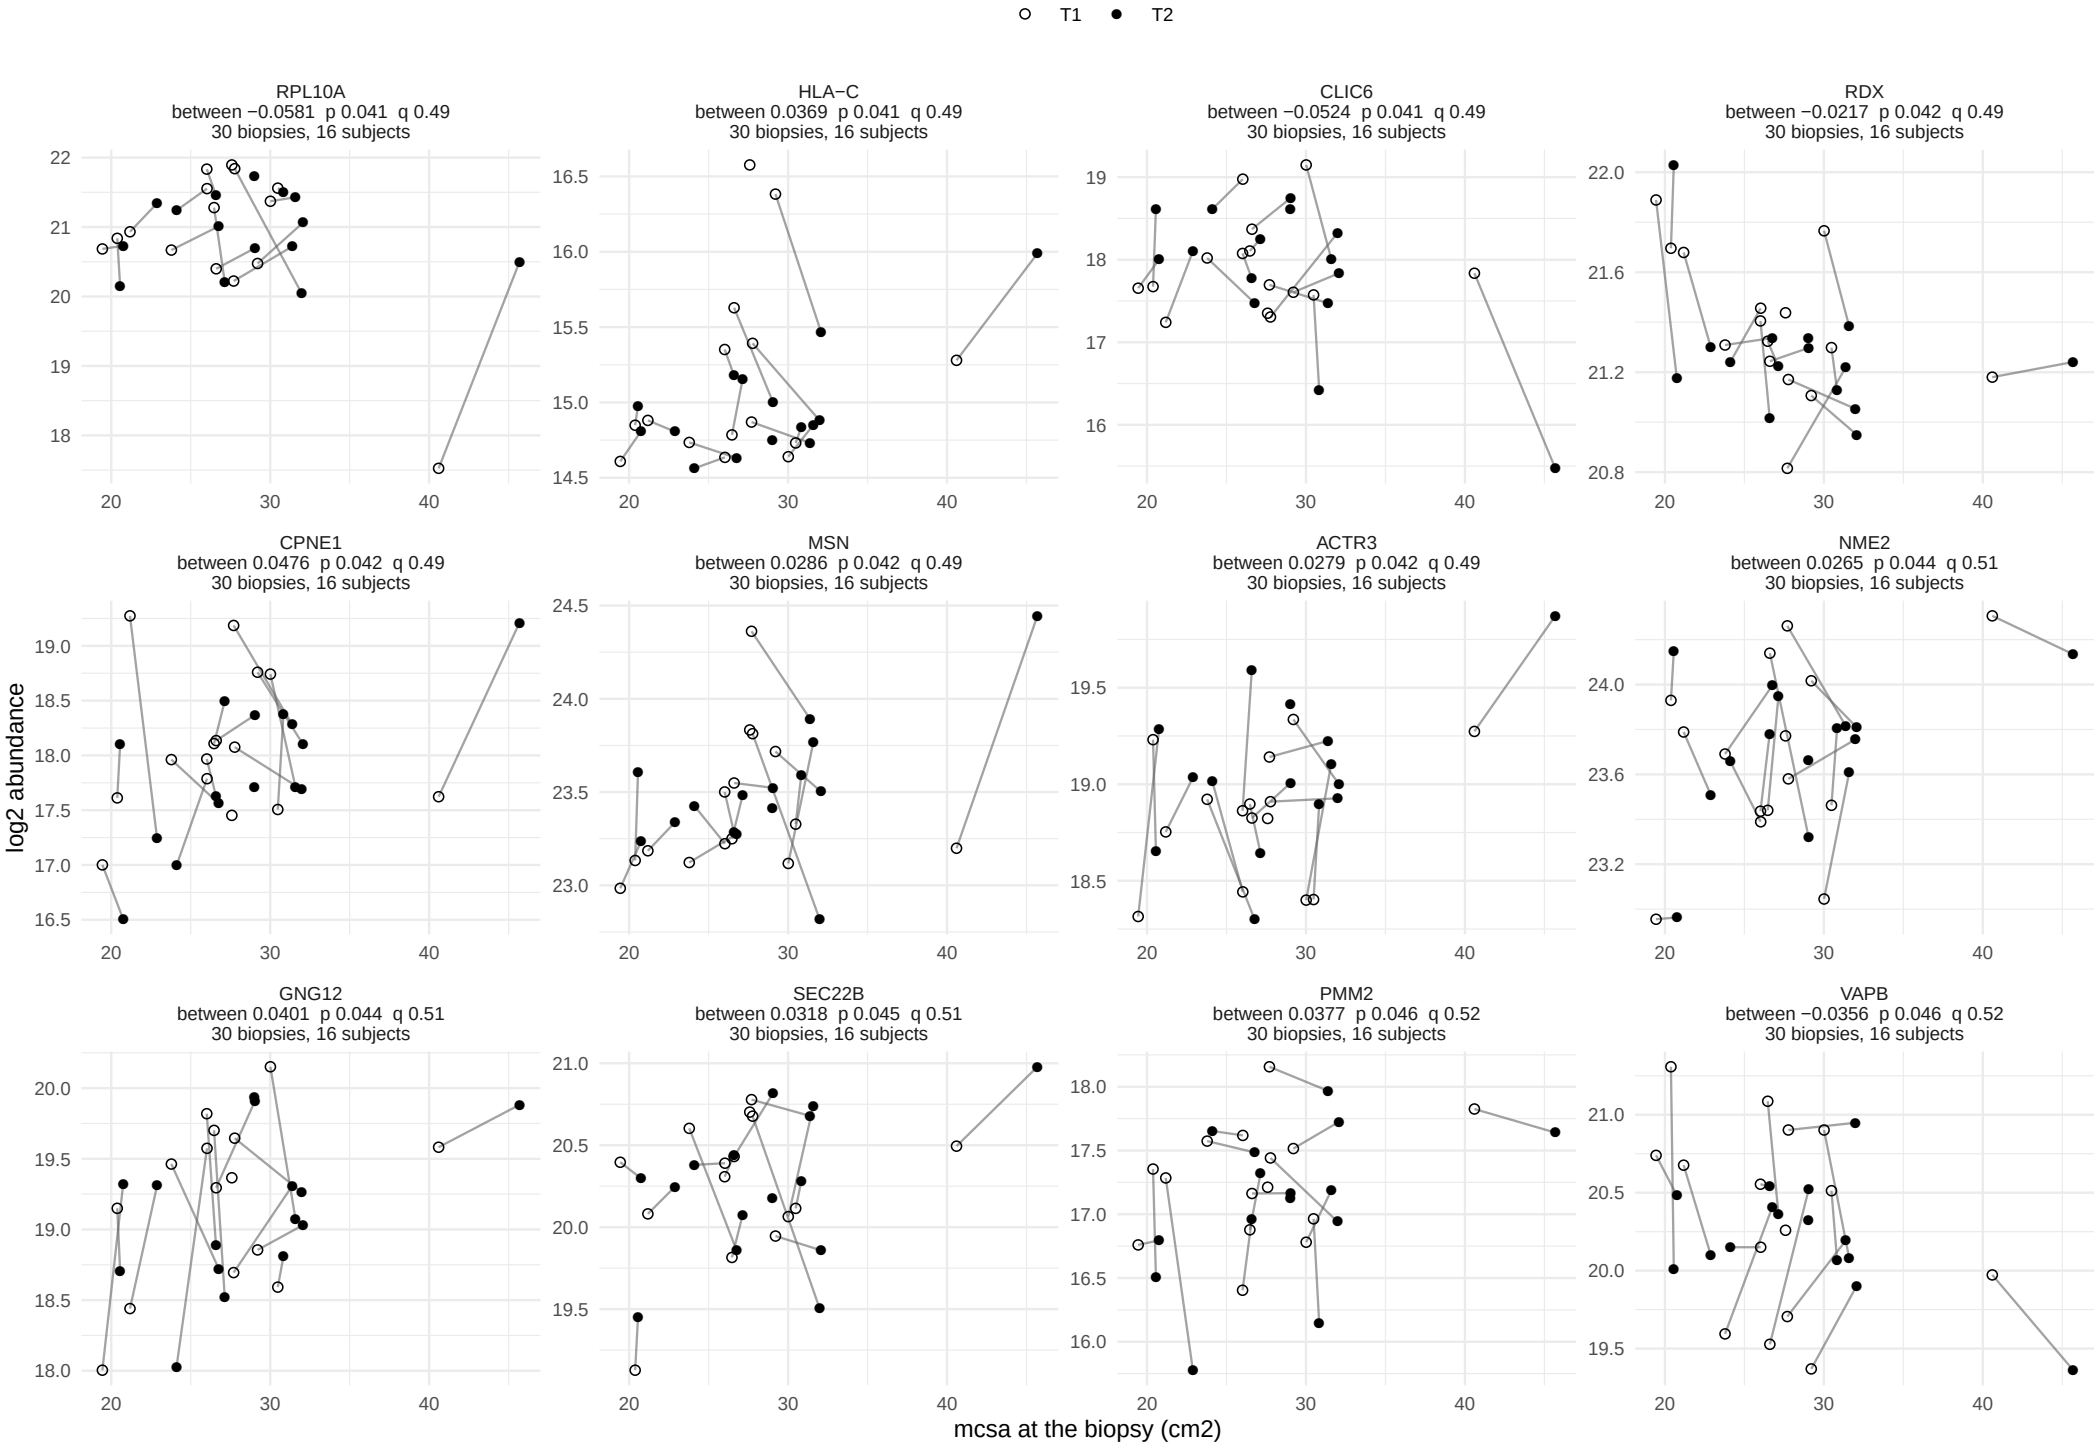

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

mcsa, between−person term


179 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 15 of 15.

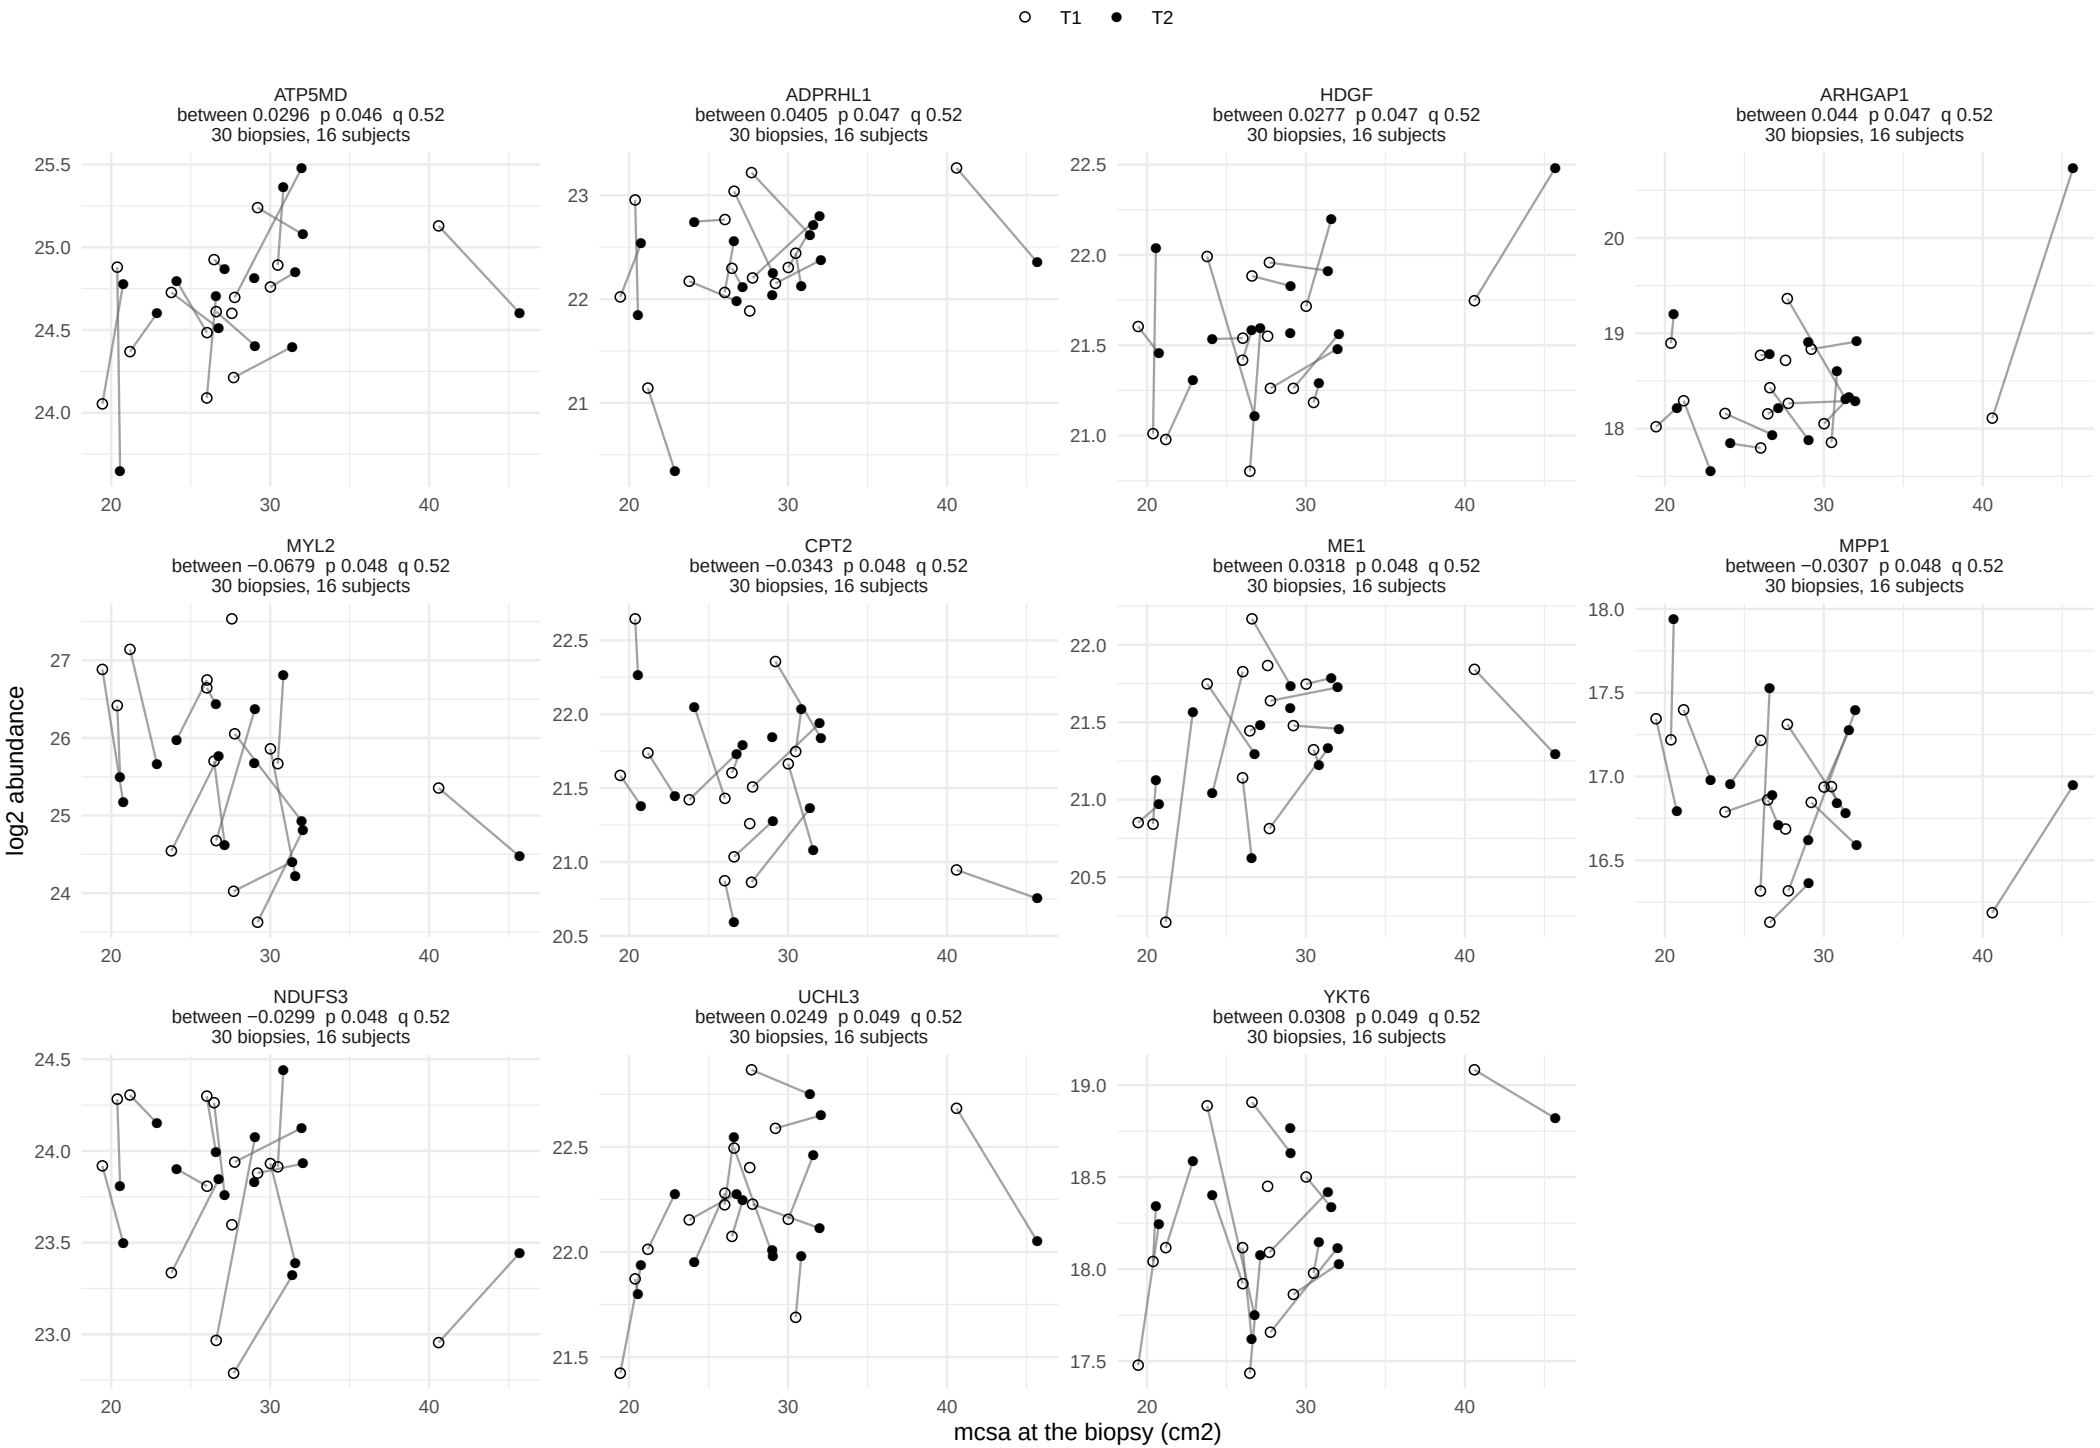

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

leg_press_1rm, within−person term


103 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 1 of 9.

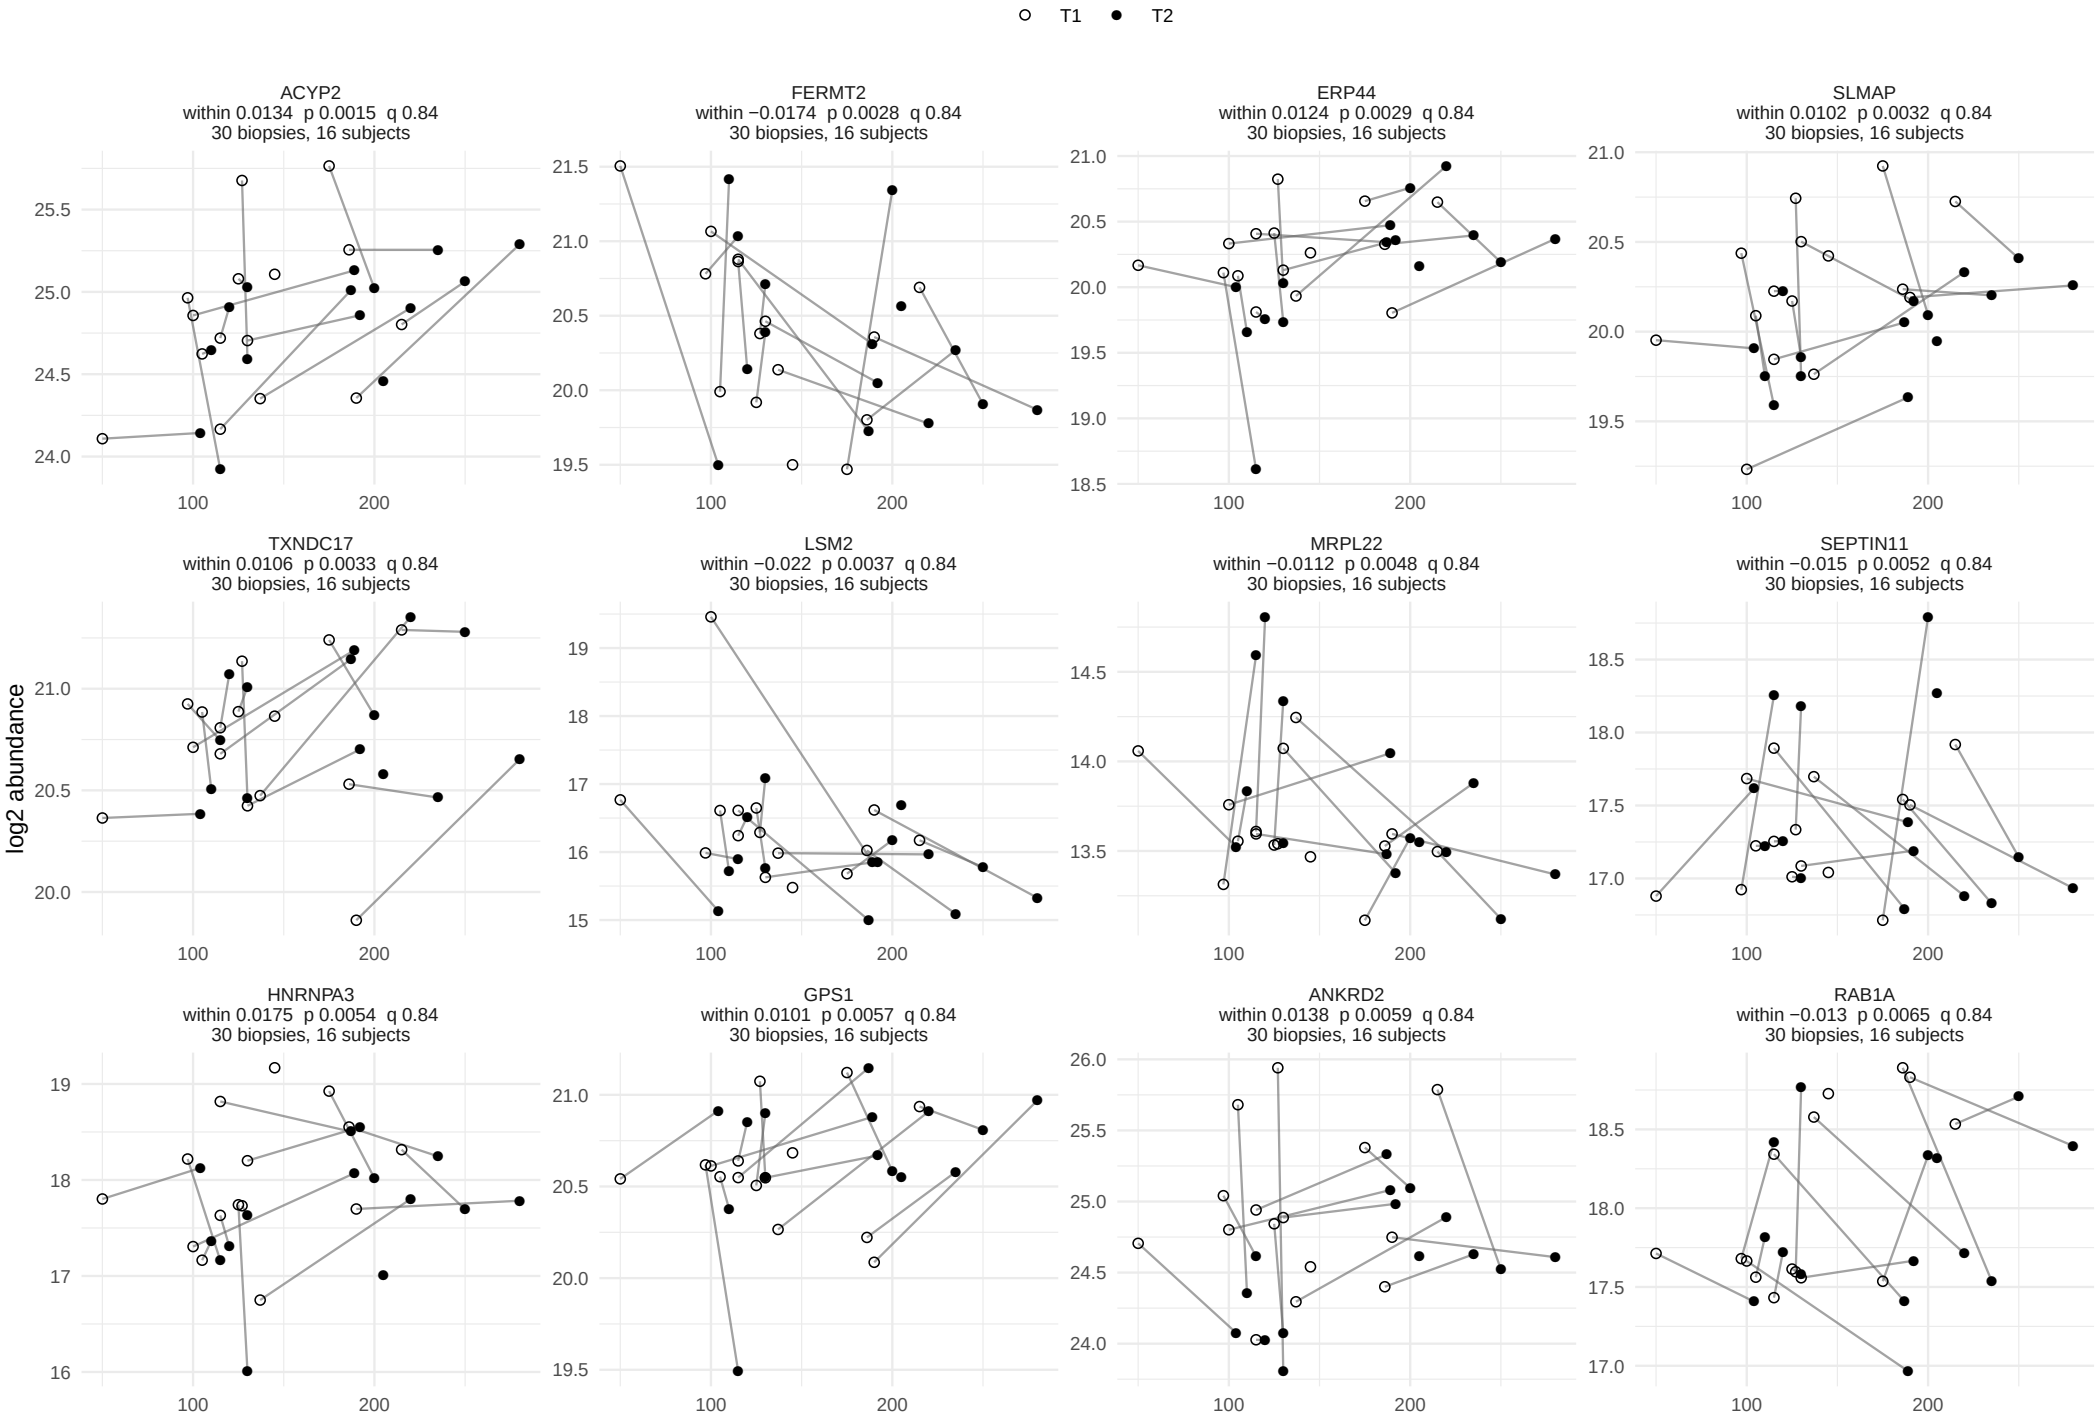

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

leg_press_1rm, within−person term


103 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 2 of 9.

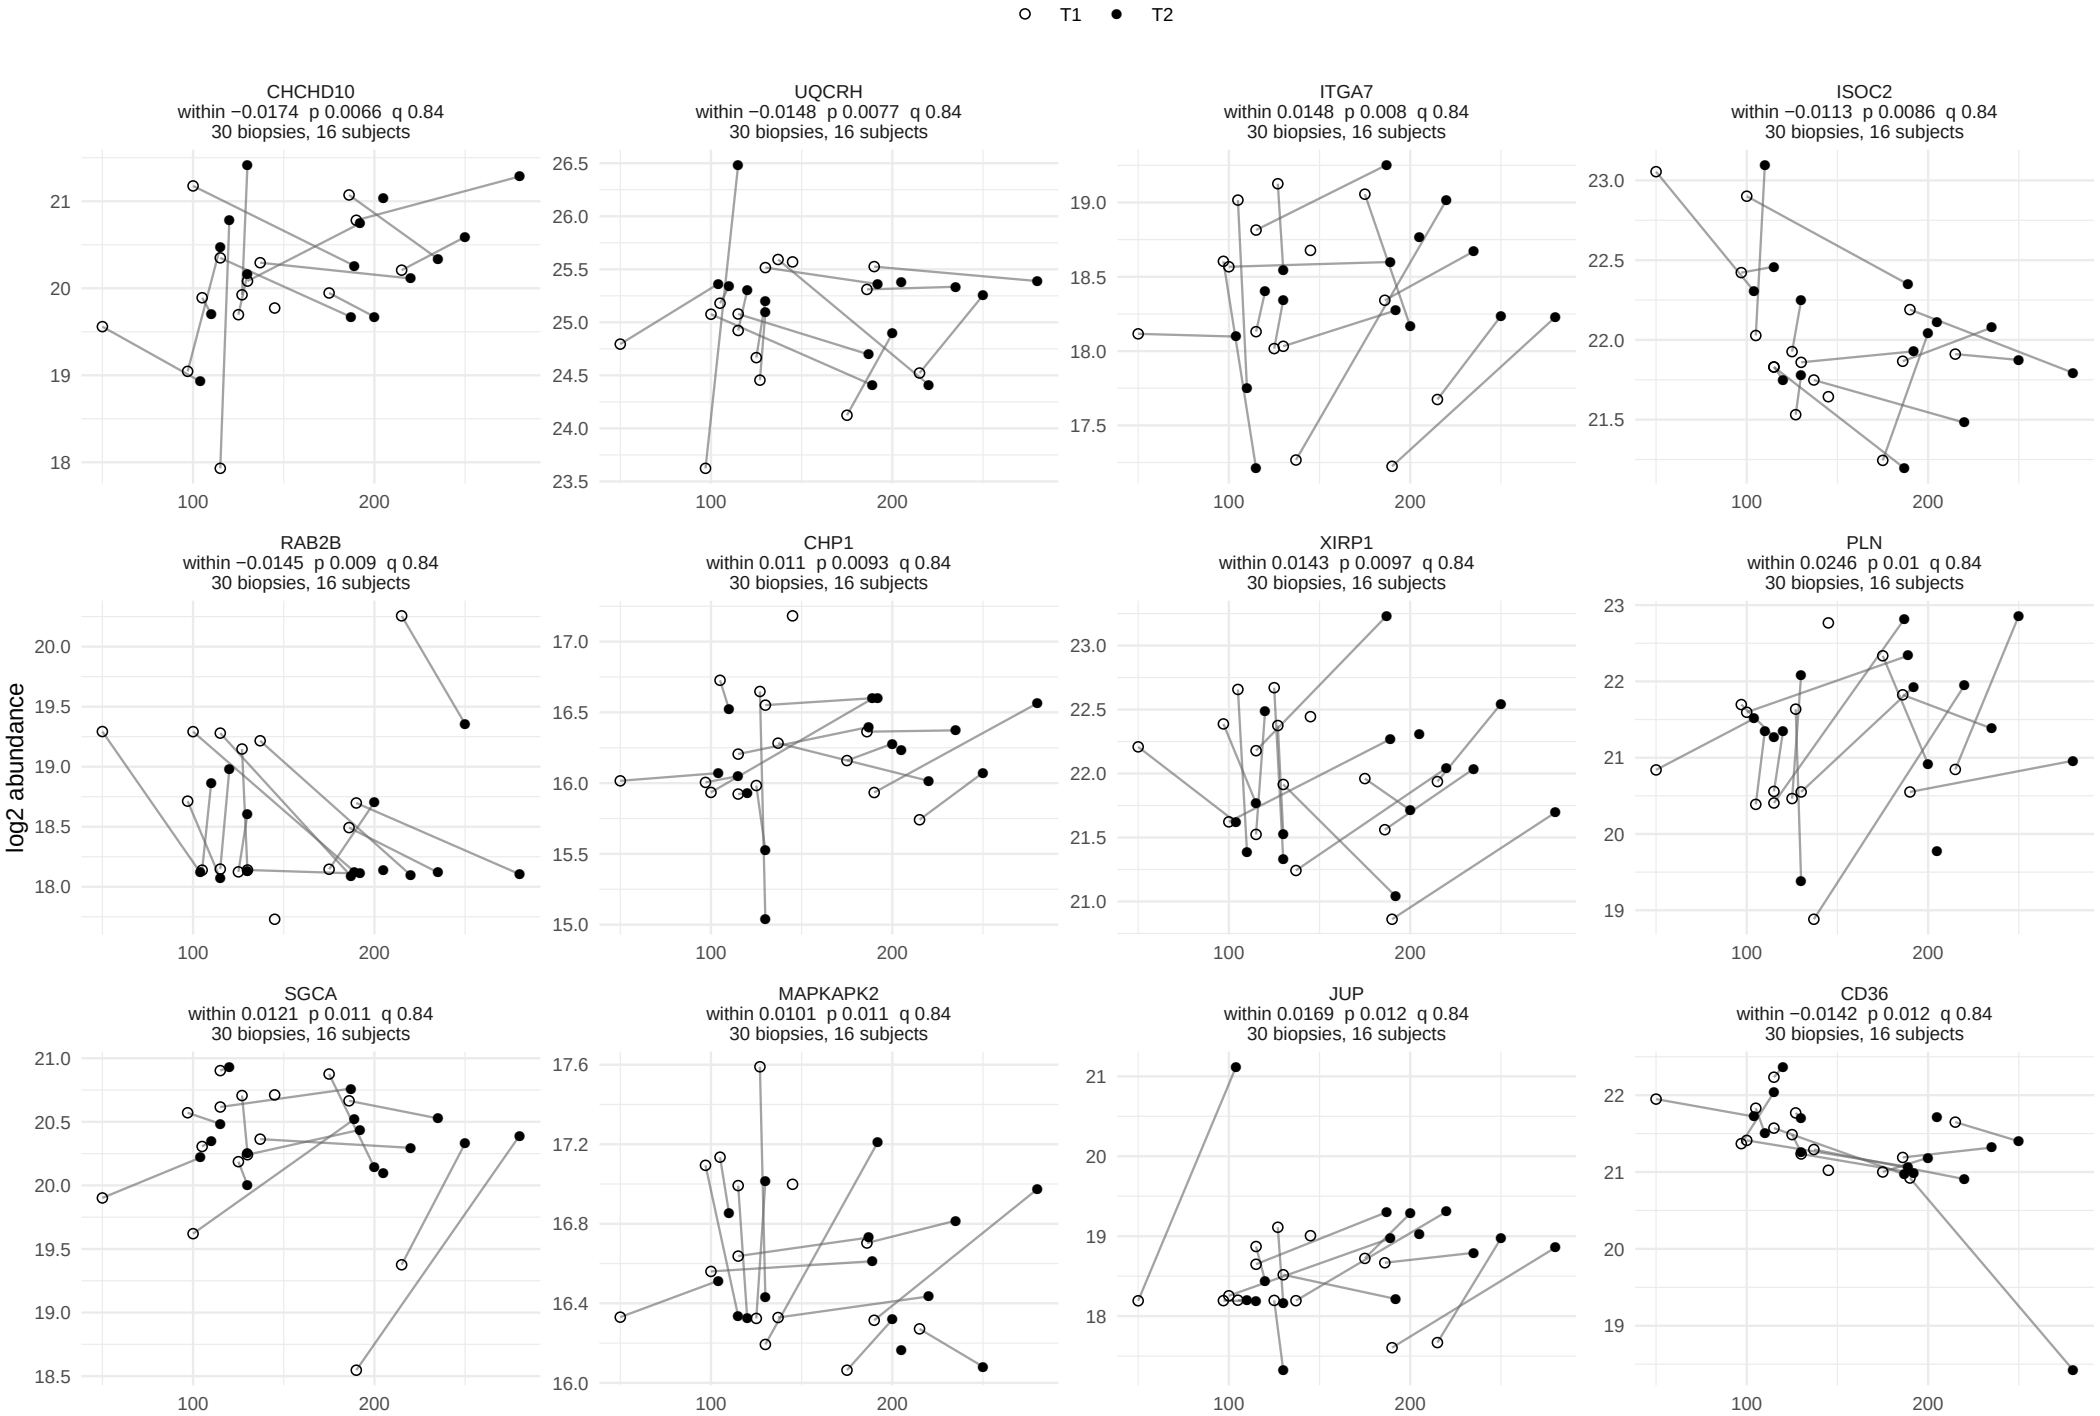

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

leg_press_1rm, within−person term


103 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 3 of 9.

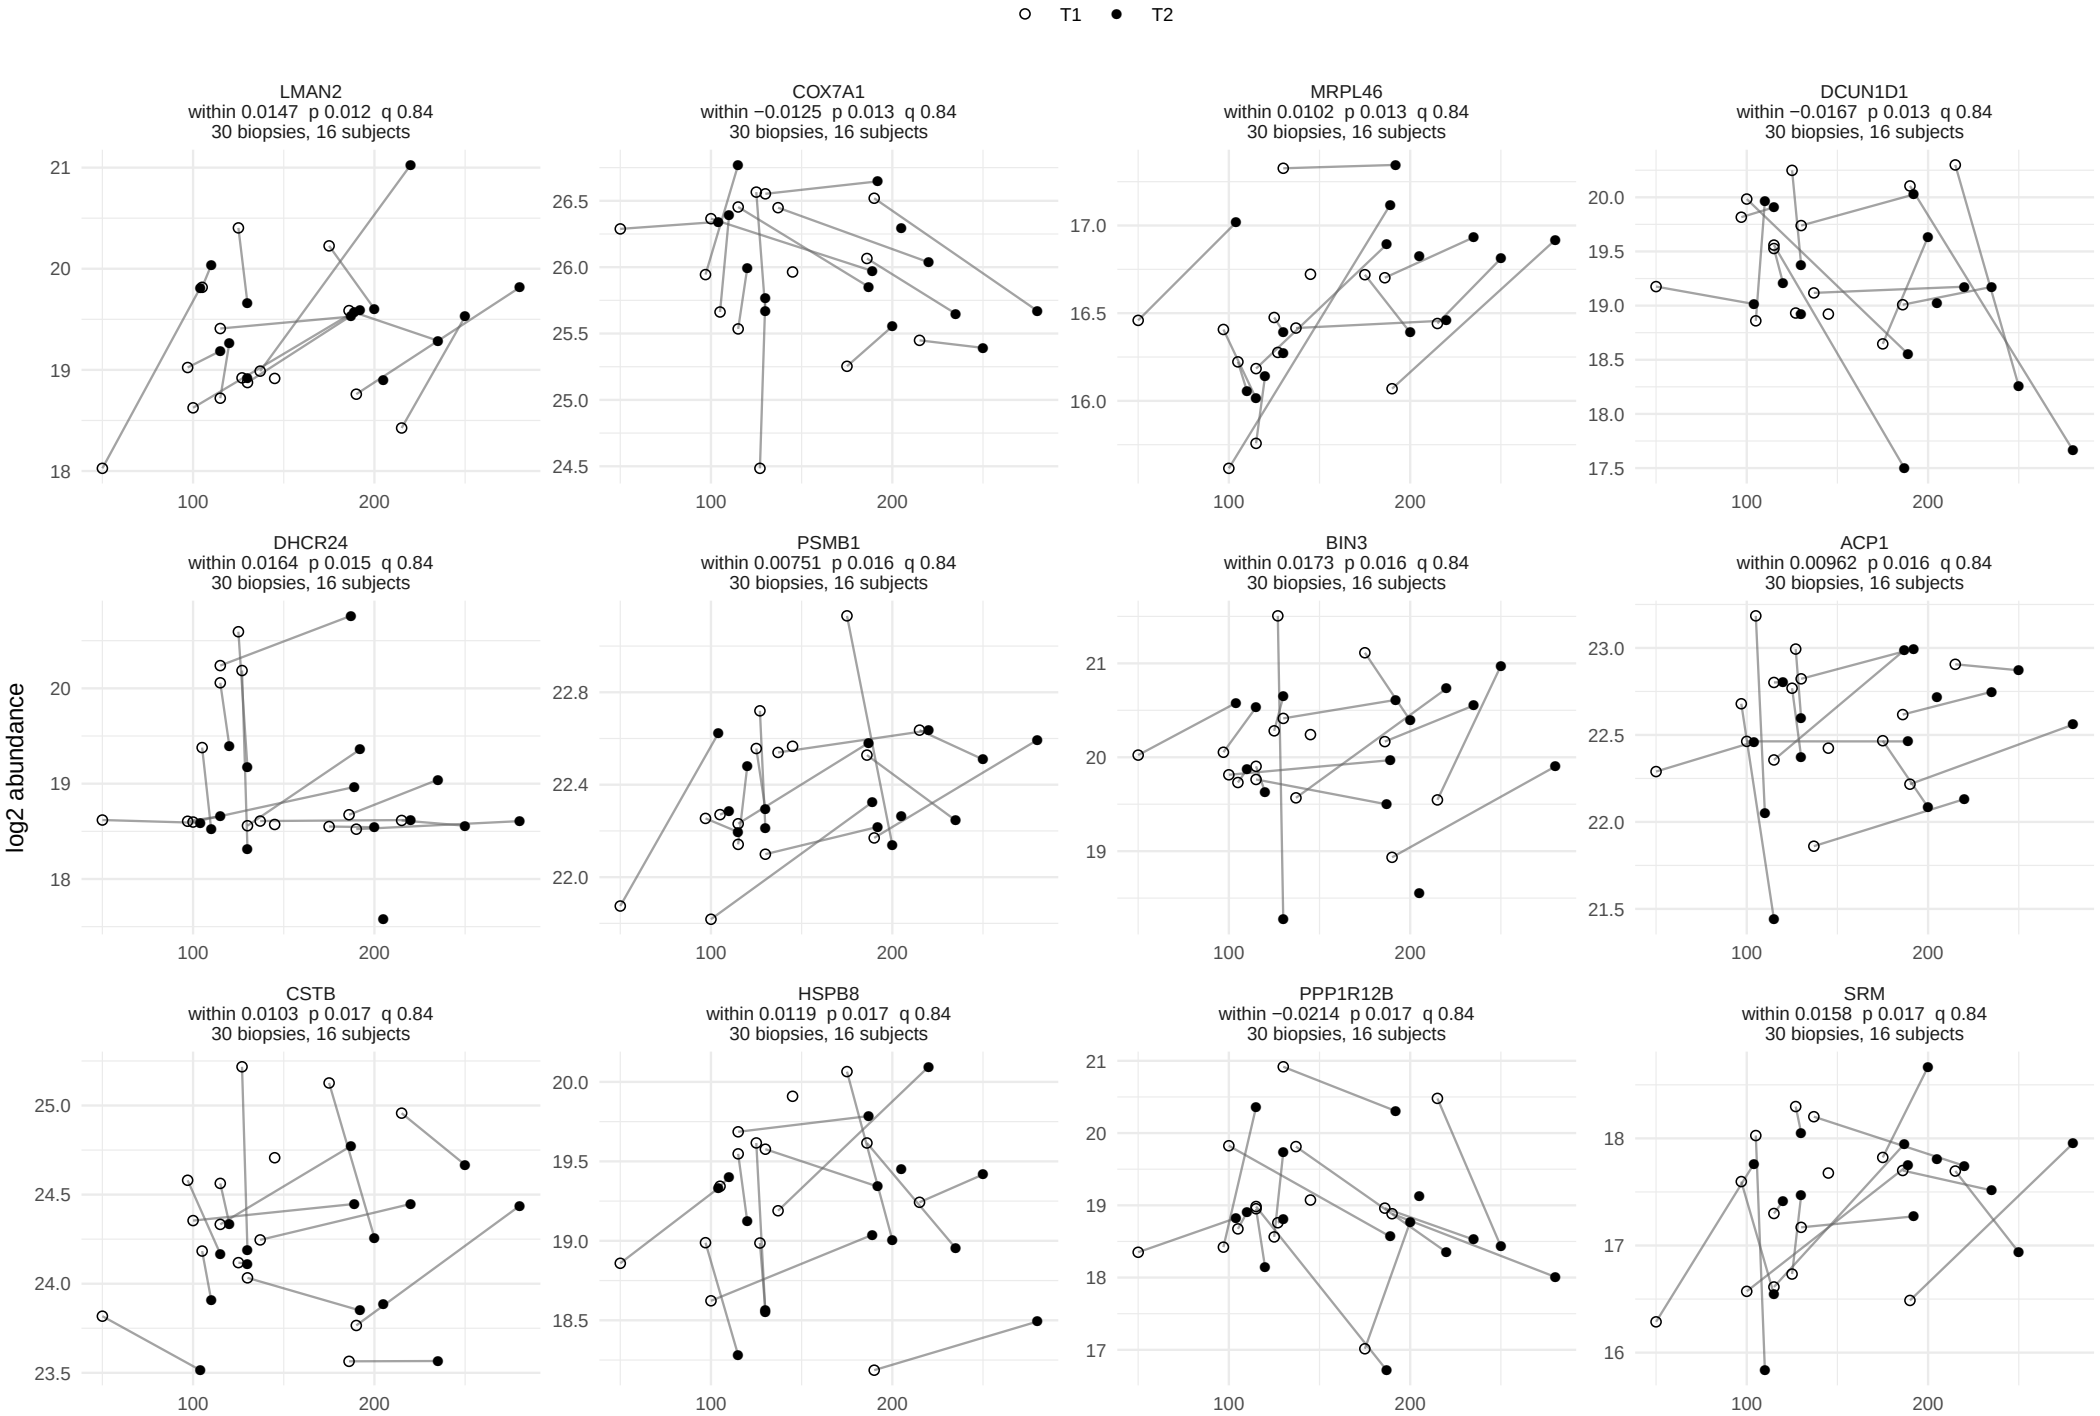

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

leg_press_1rm, within−person term


103 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 4 of 9.

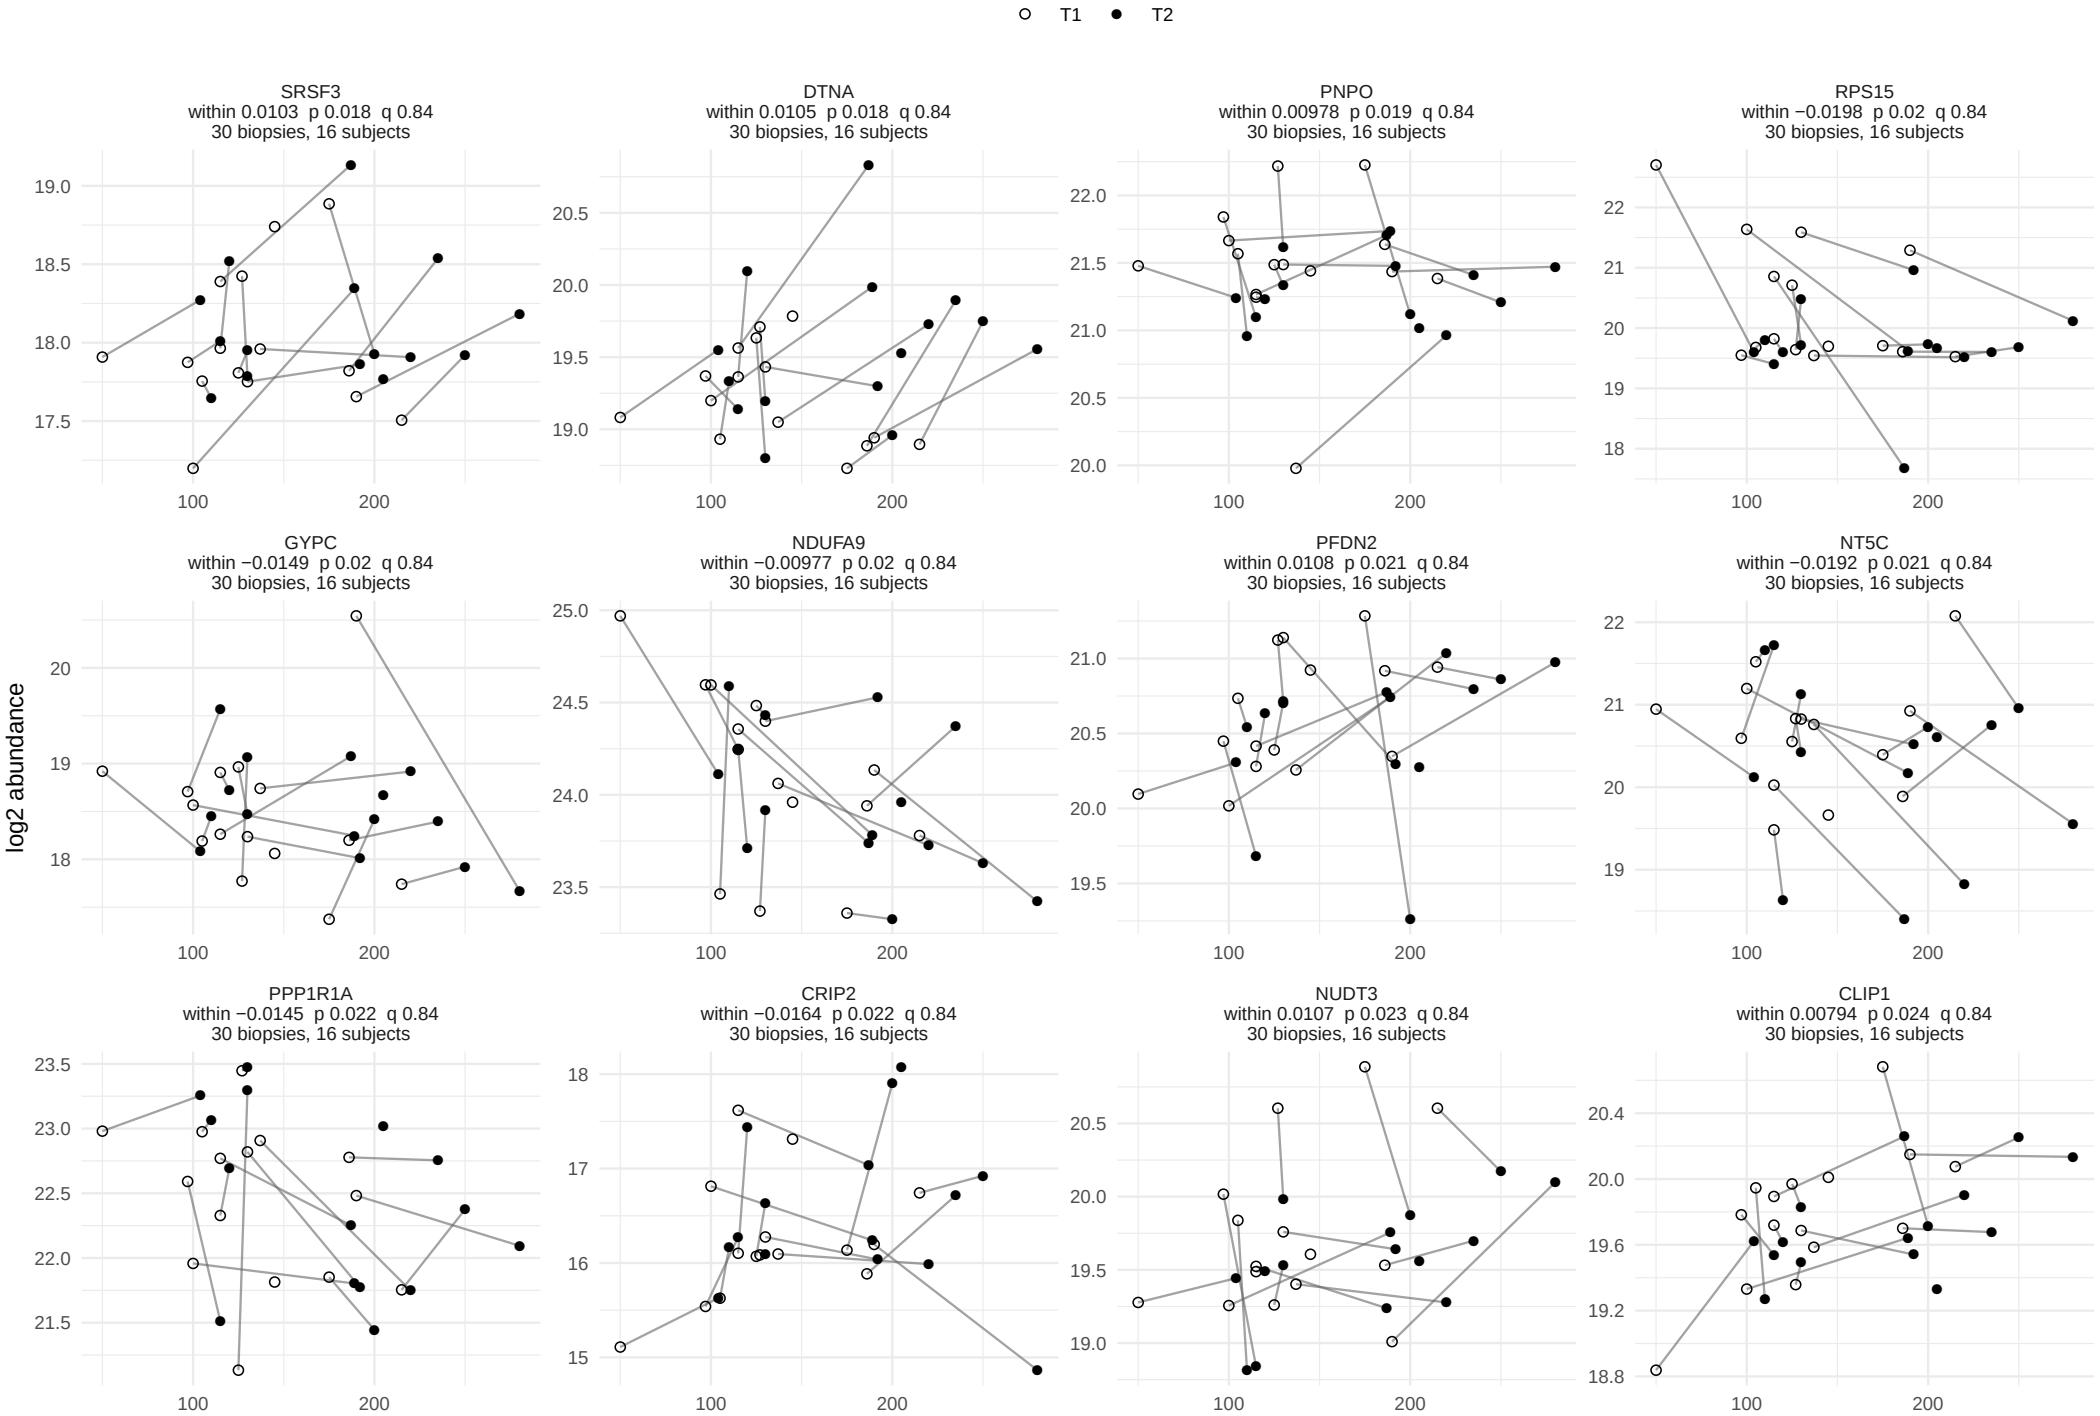

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

leg_press_1rm, within−person term


103 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 5 of 9.

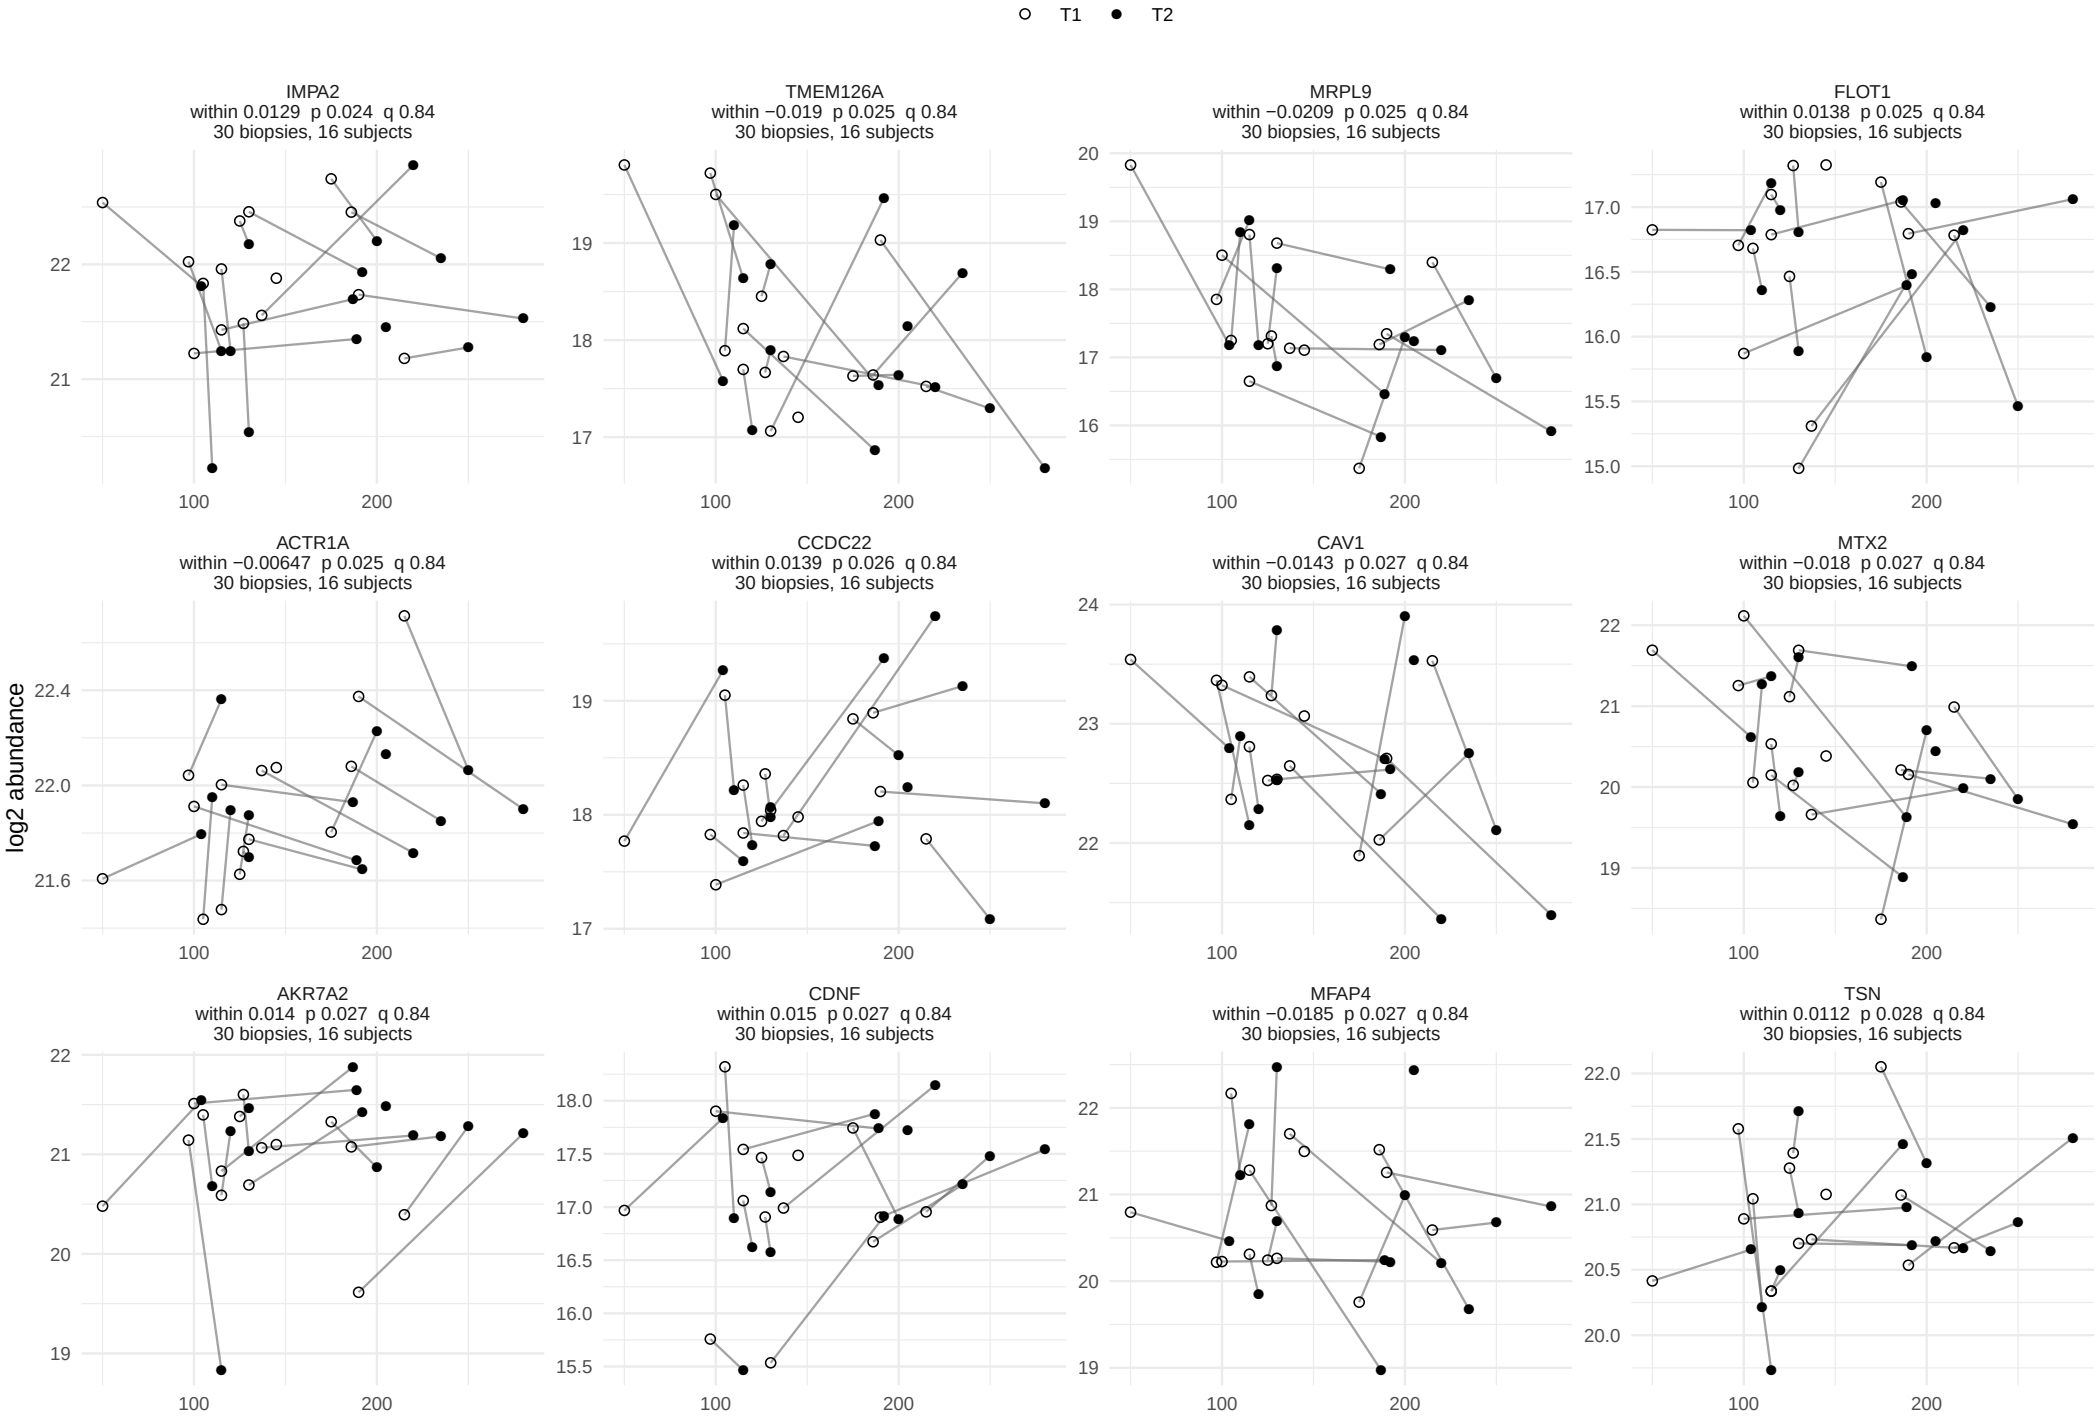

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

leg_press_1rm, within−person term


103 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 6 of 9.

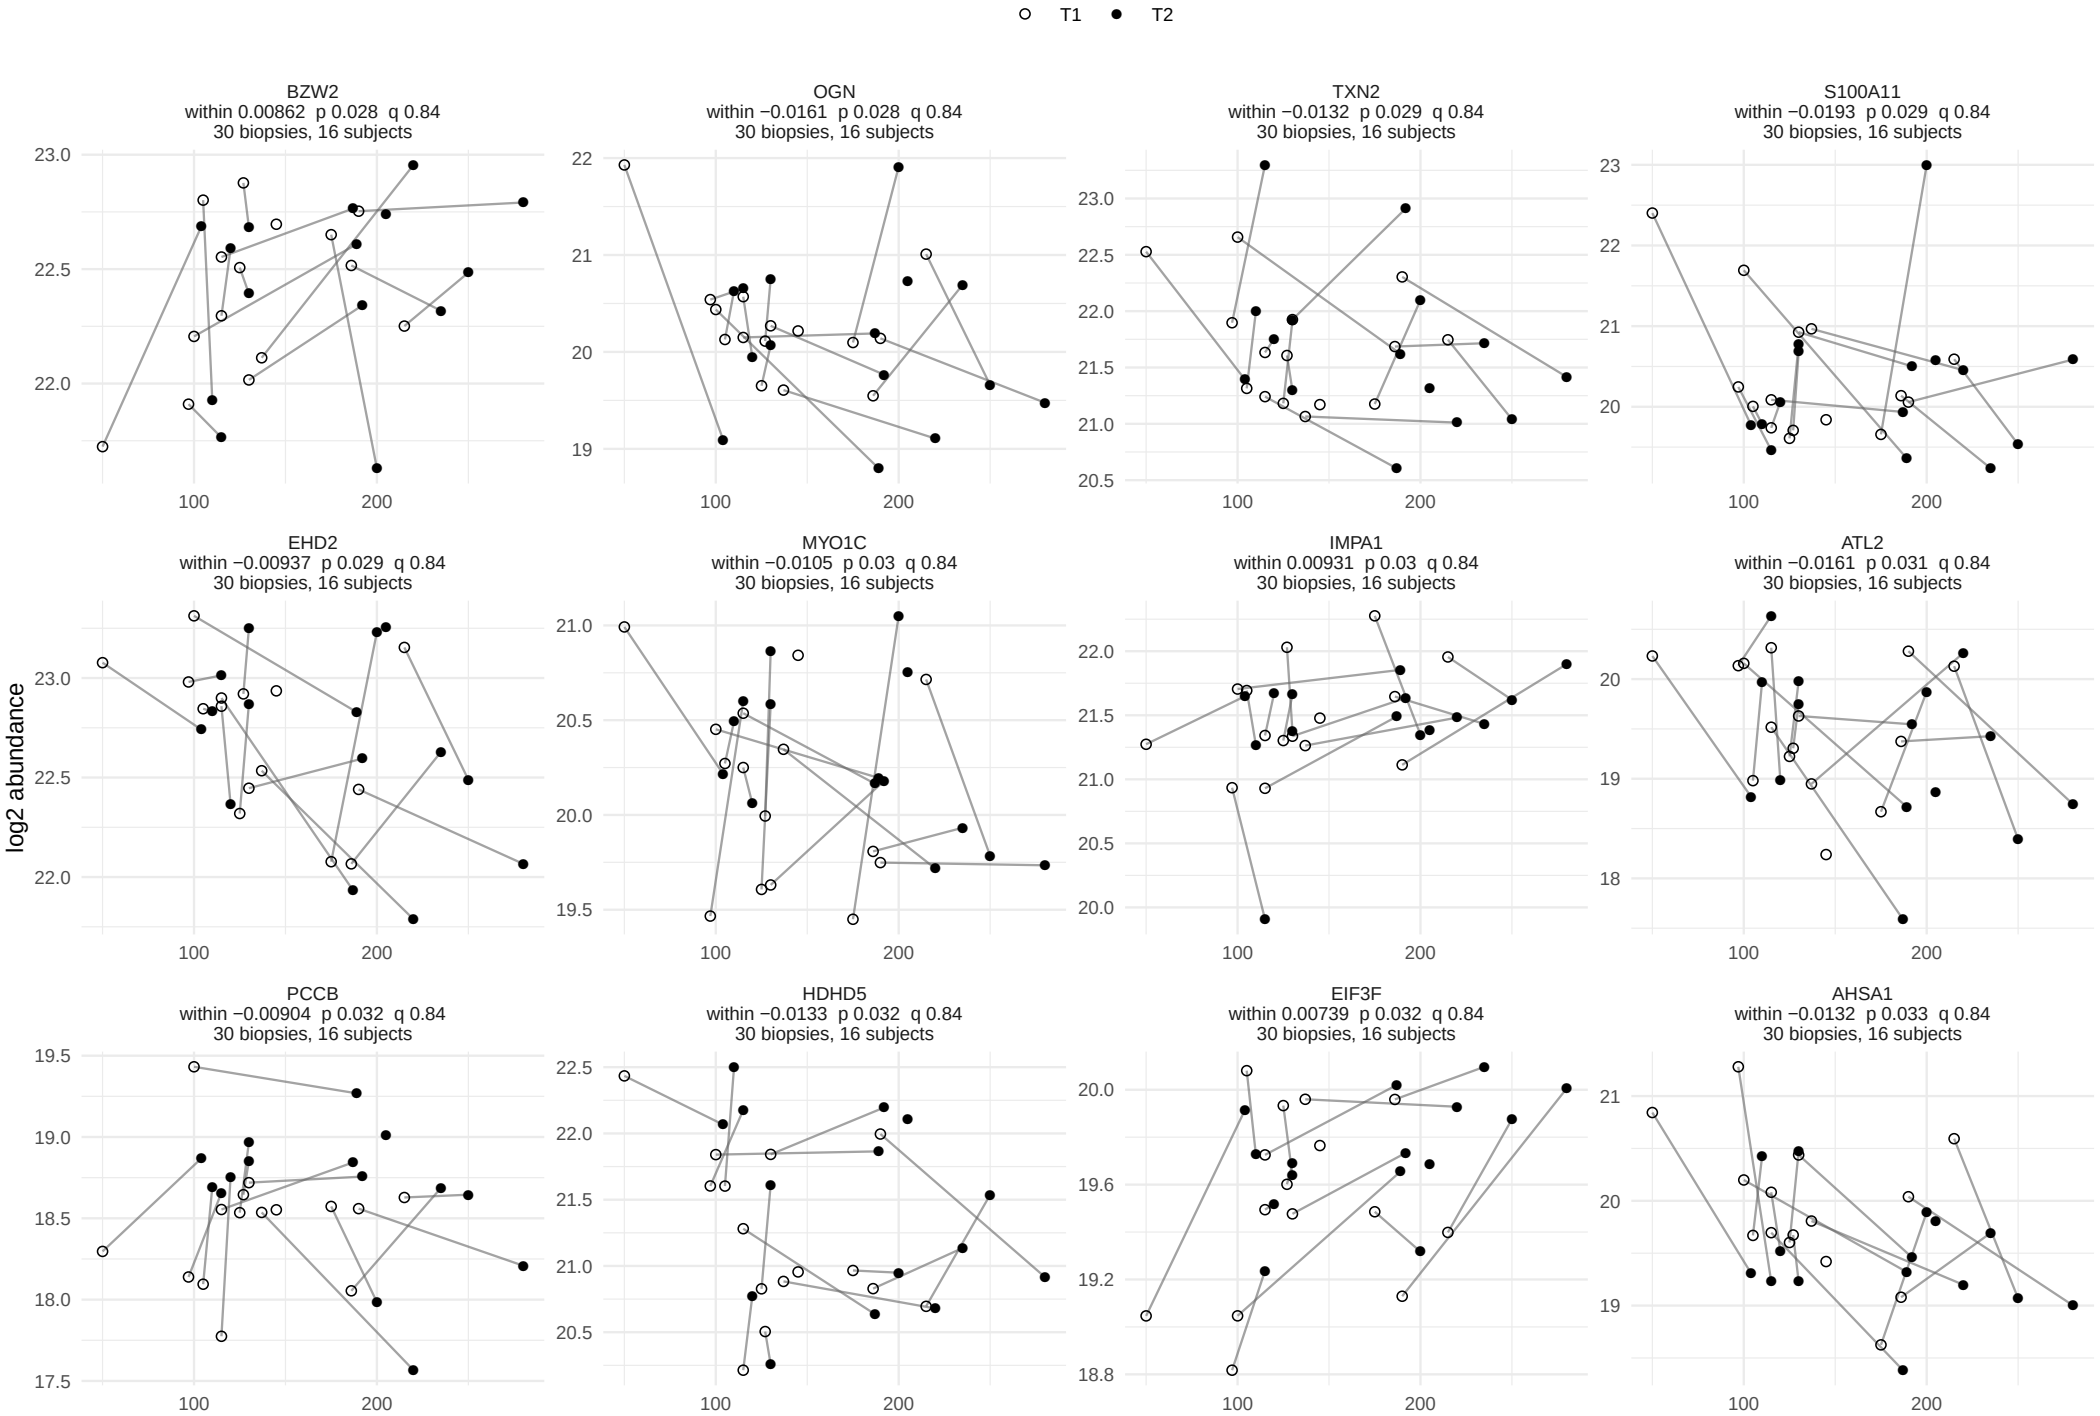

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

leg_press_1rm, within−person term


103 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 7 of 9.

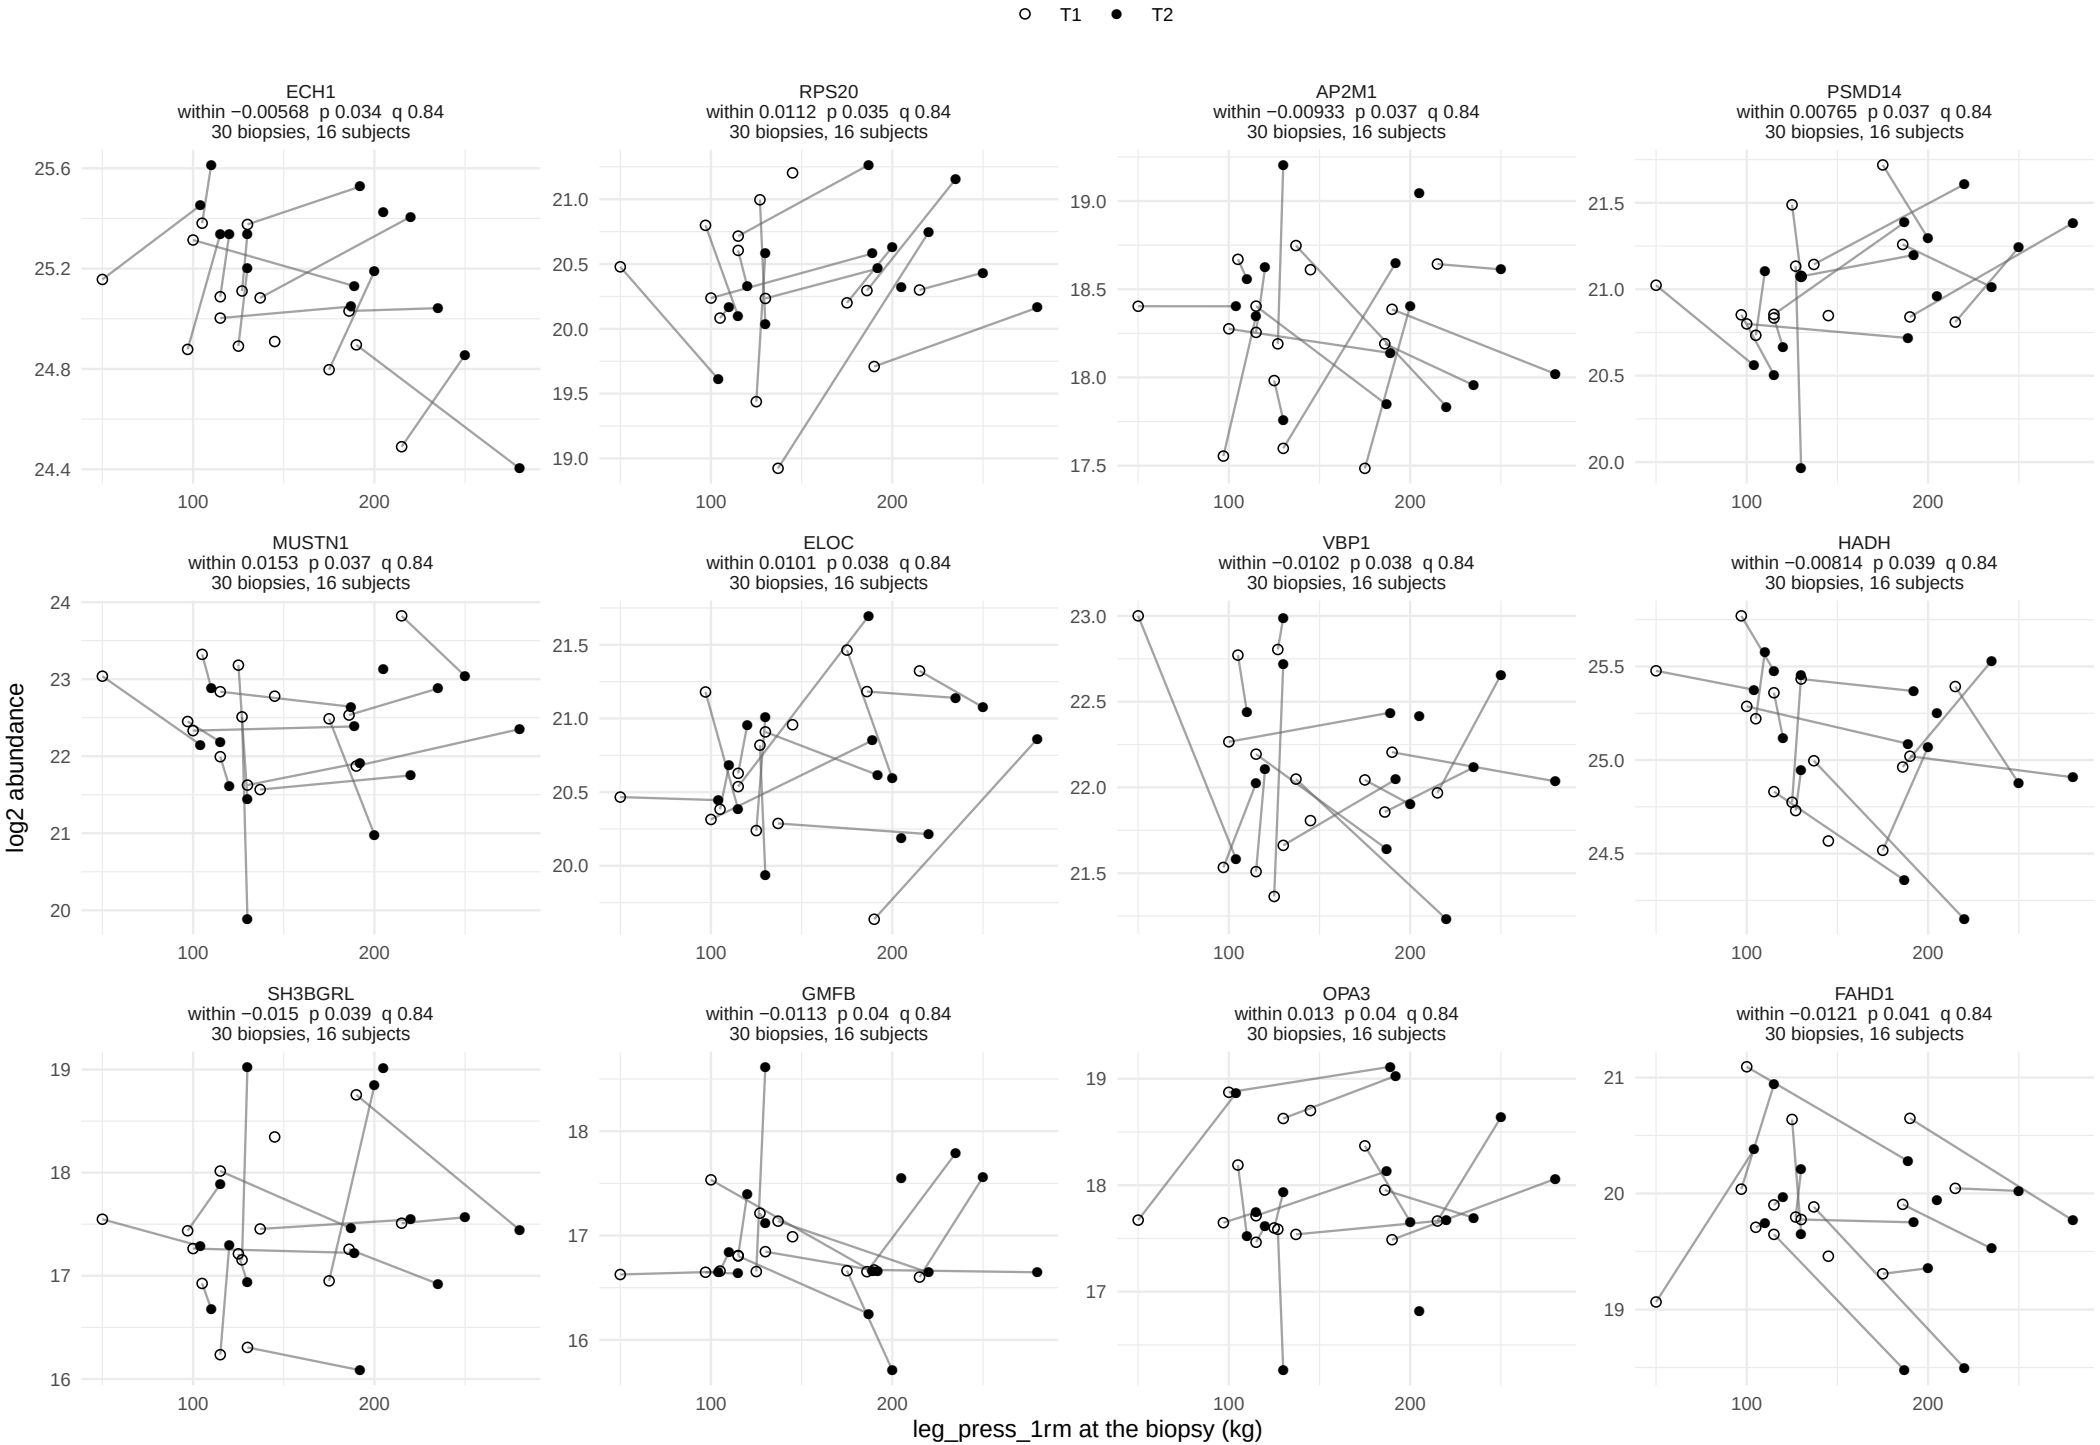

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

leg_press_1rm, within−person term


103 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 8 of 9.

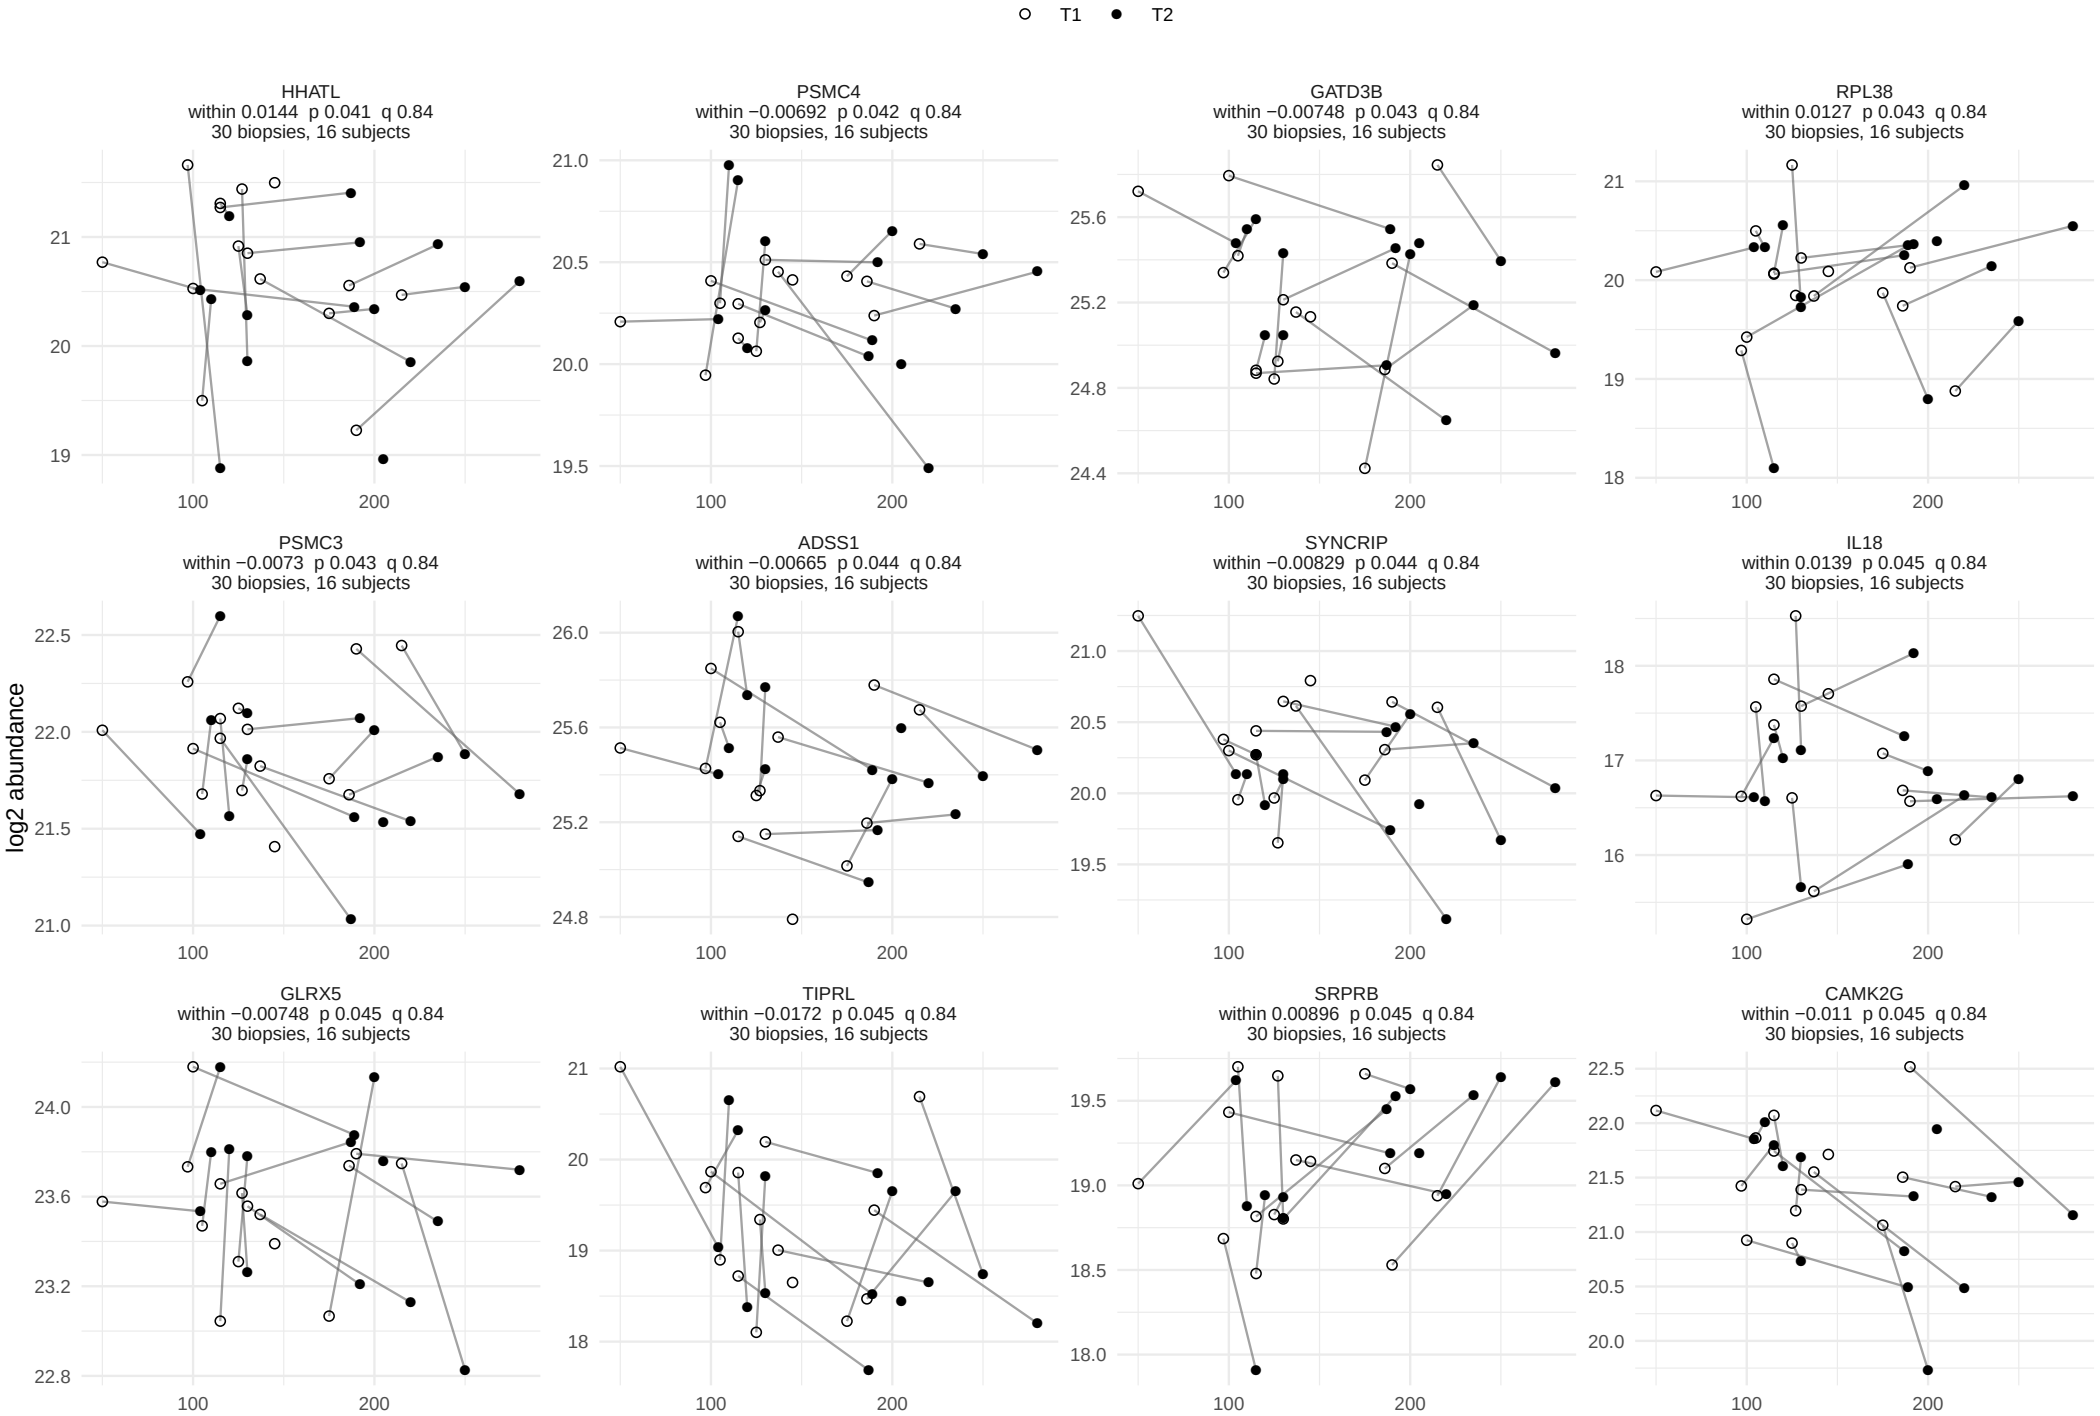

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

leg_press_1rm, within−person term


103 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 9 of 9.

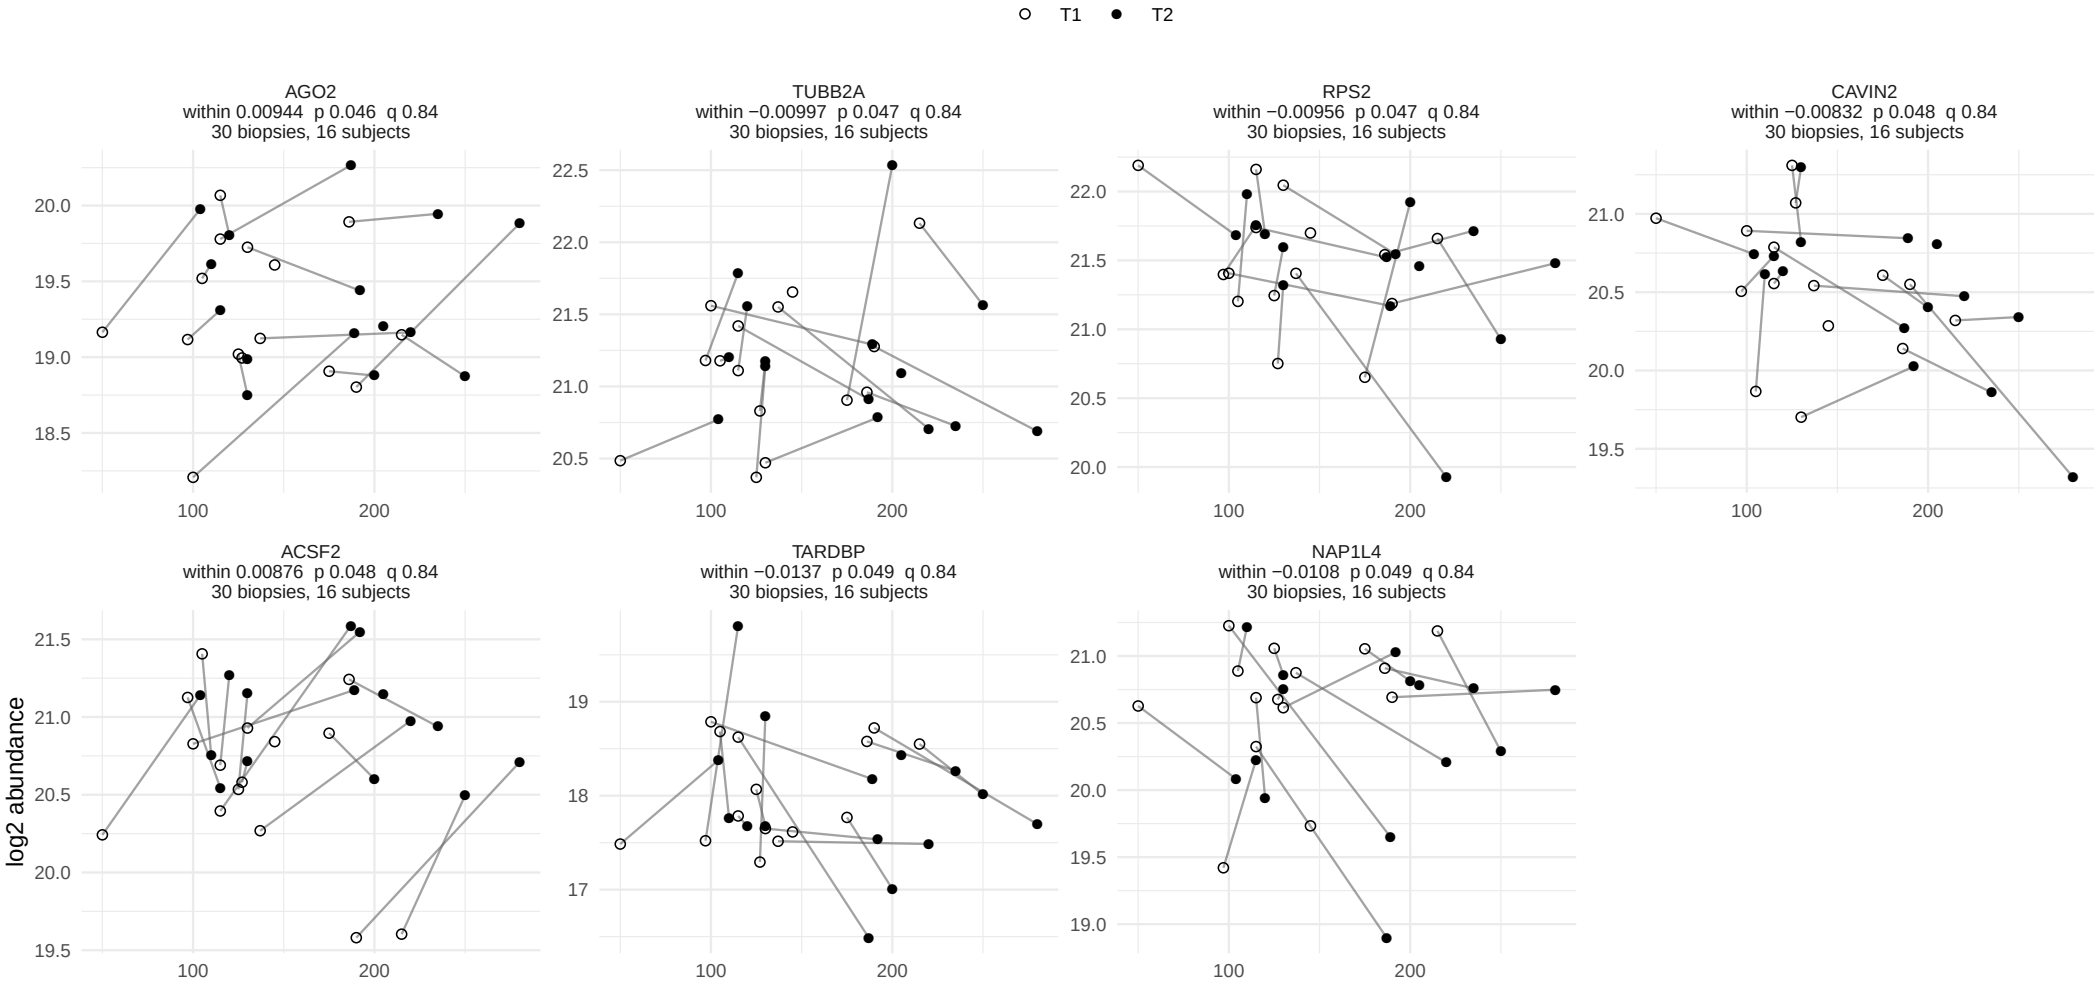

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

leg_press_1rm, between−person term


132 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 1 of 11.

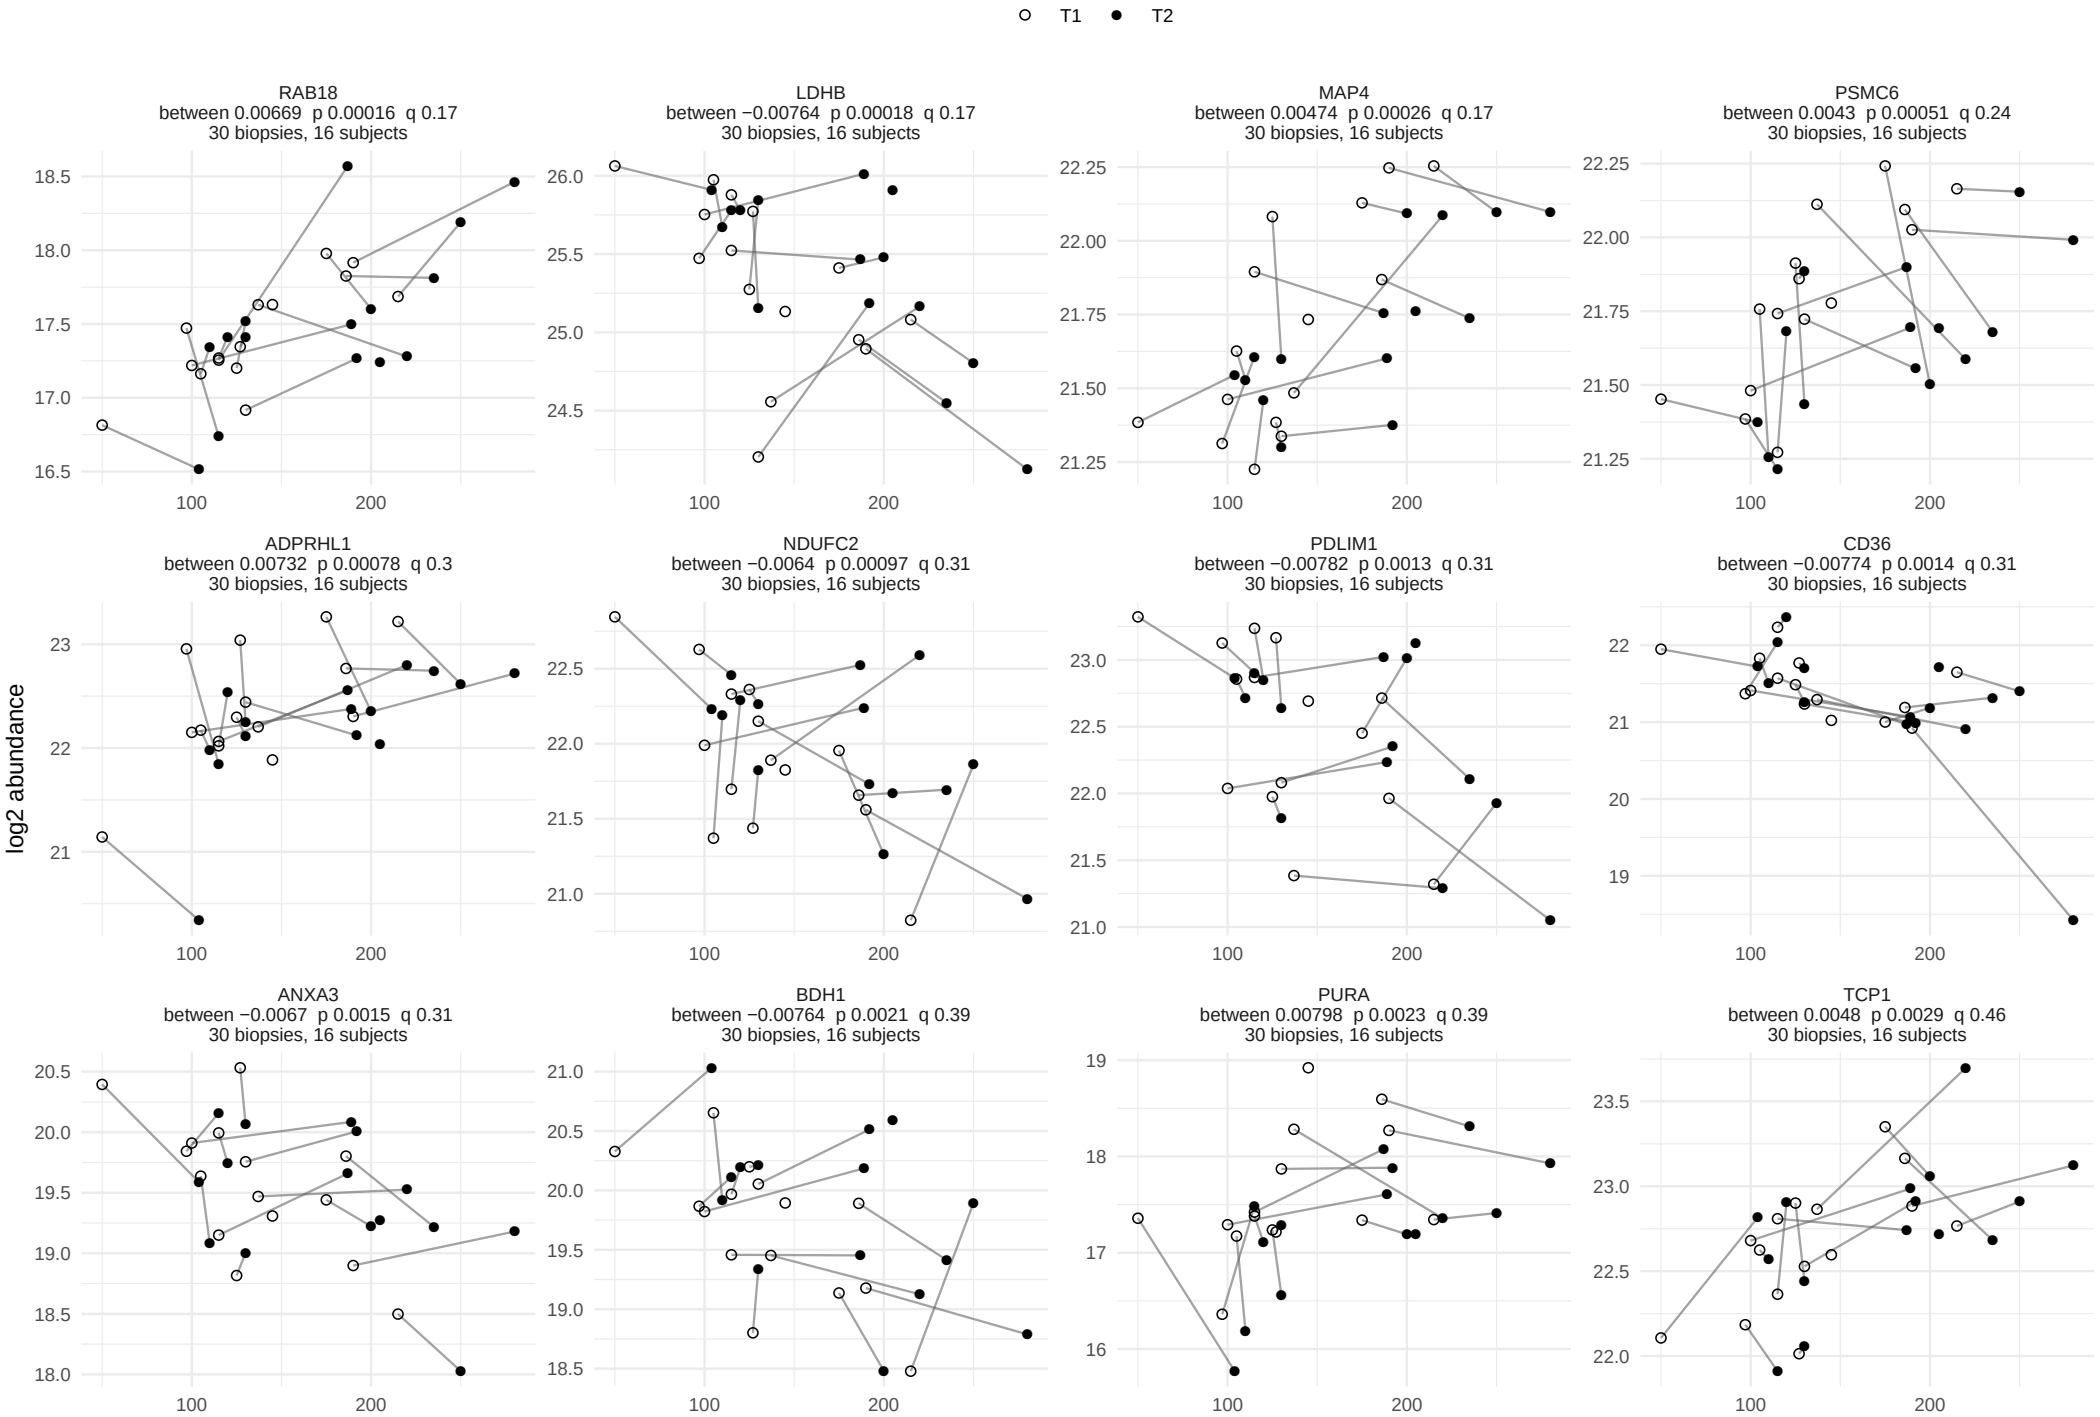

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

leg_press_1rm, between−person term


132 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 2 of 11.

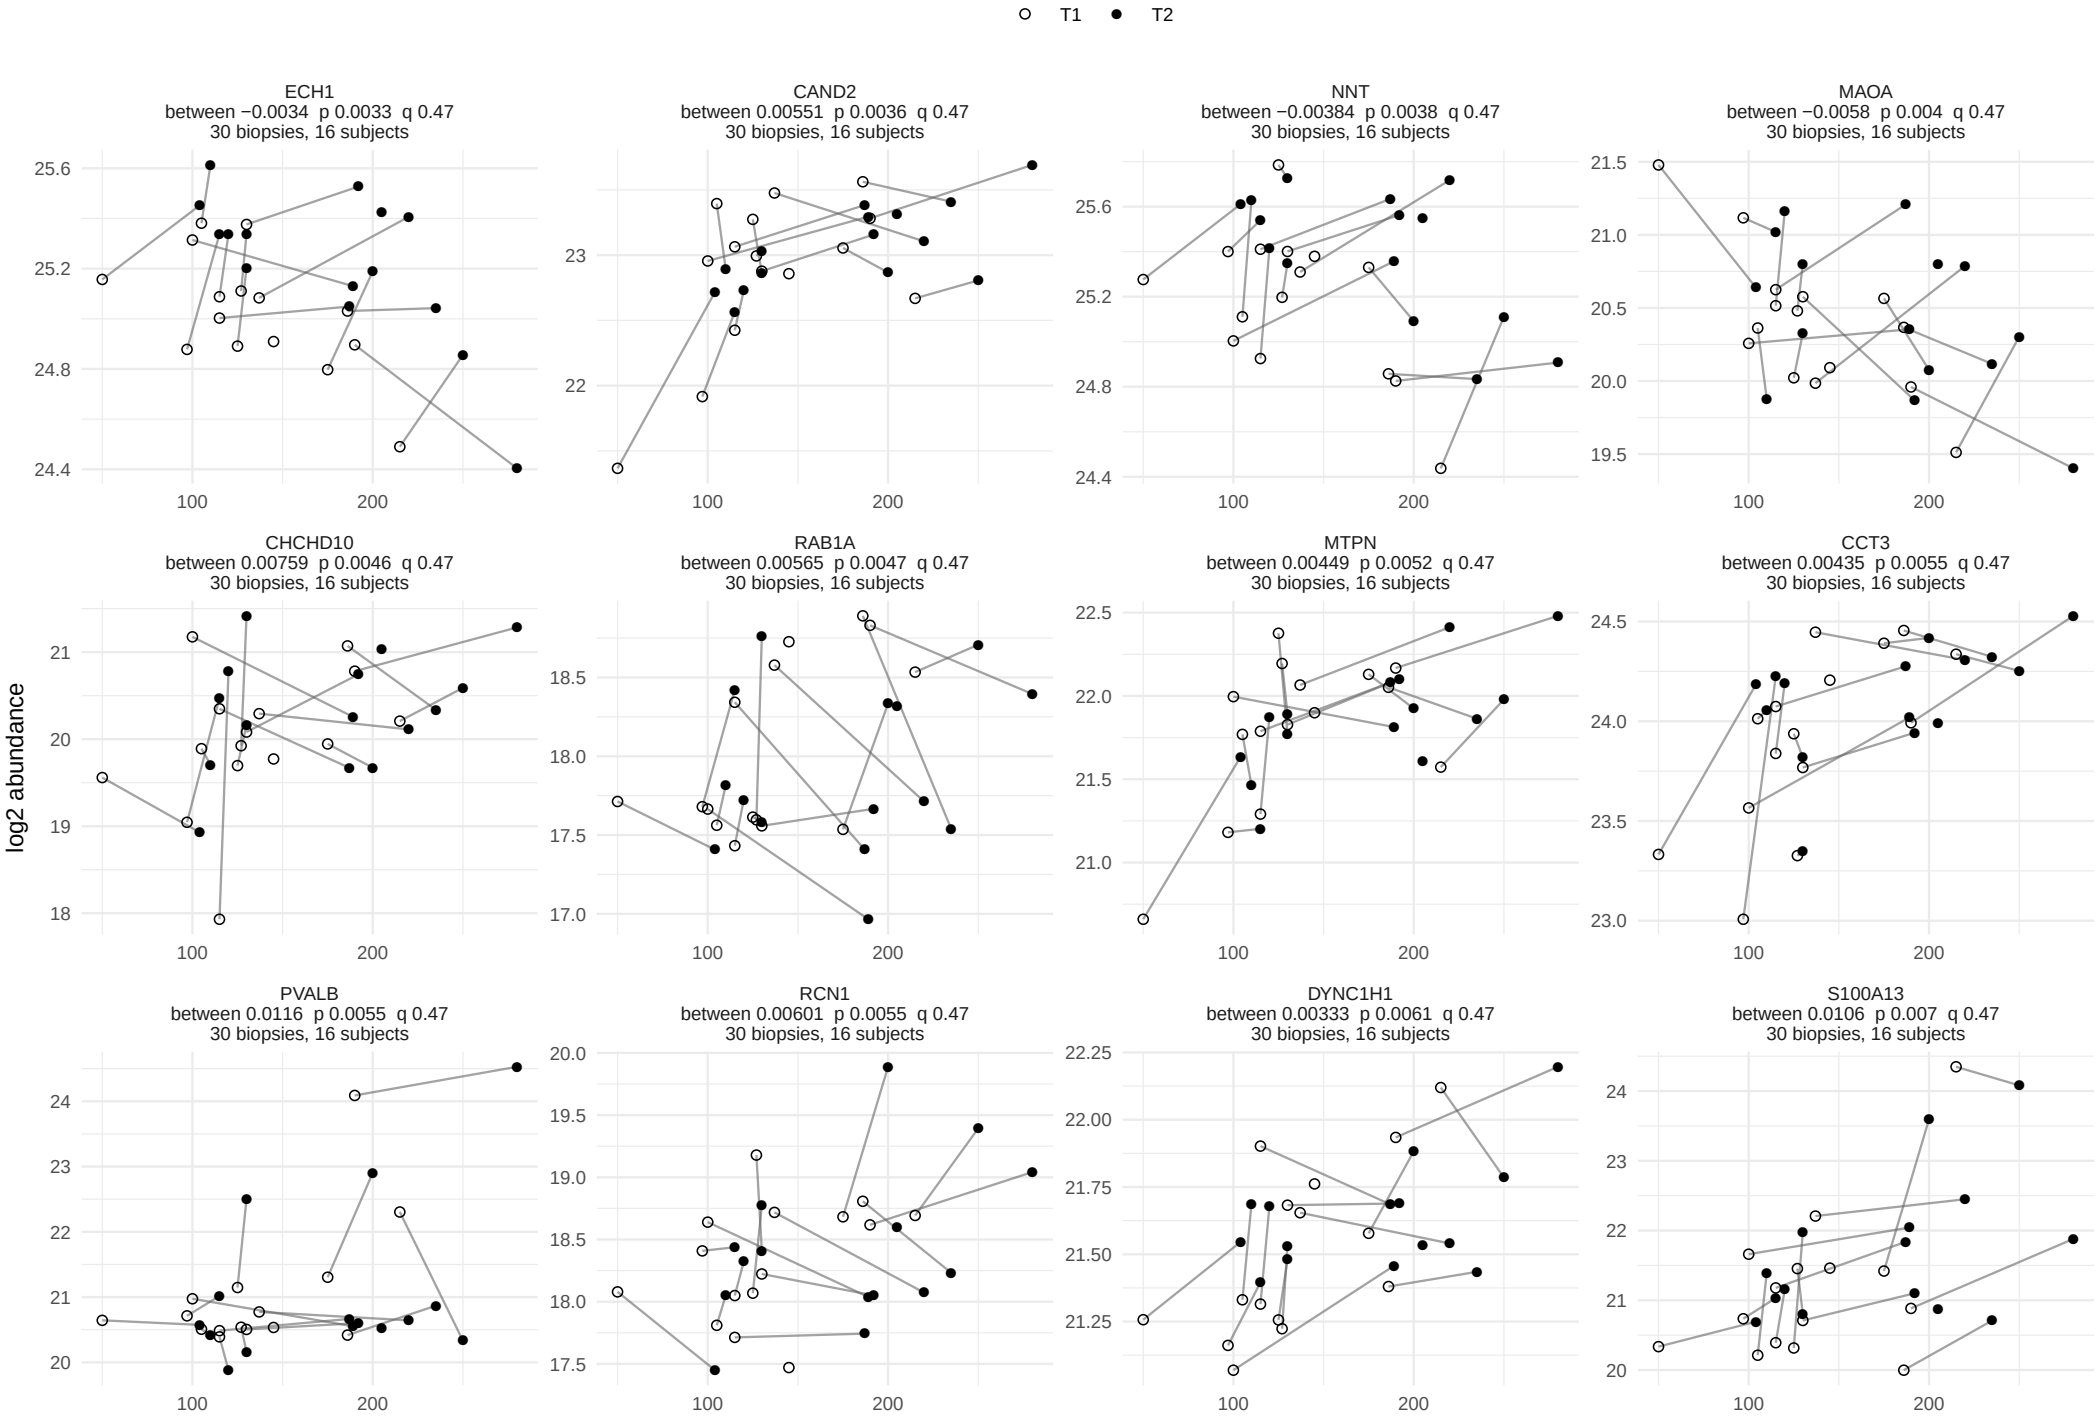

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

leg_press_1rm, between−person term


132 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 3 of 11.

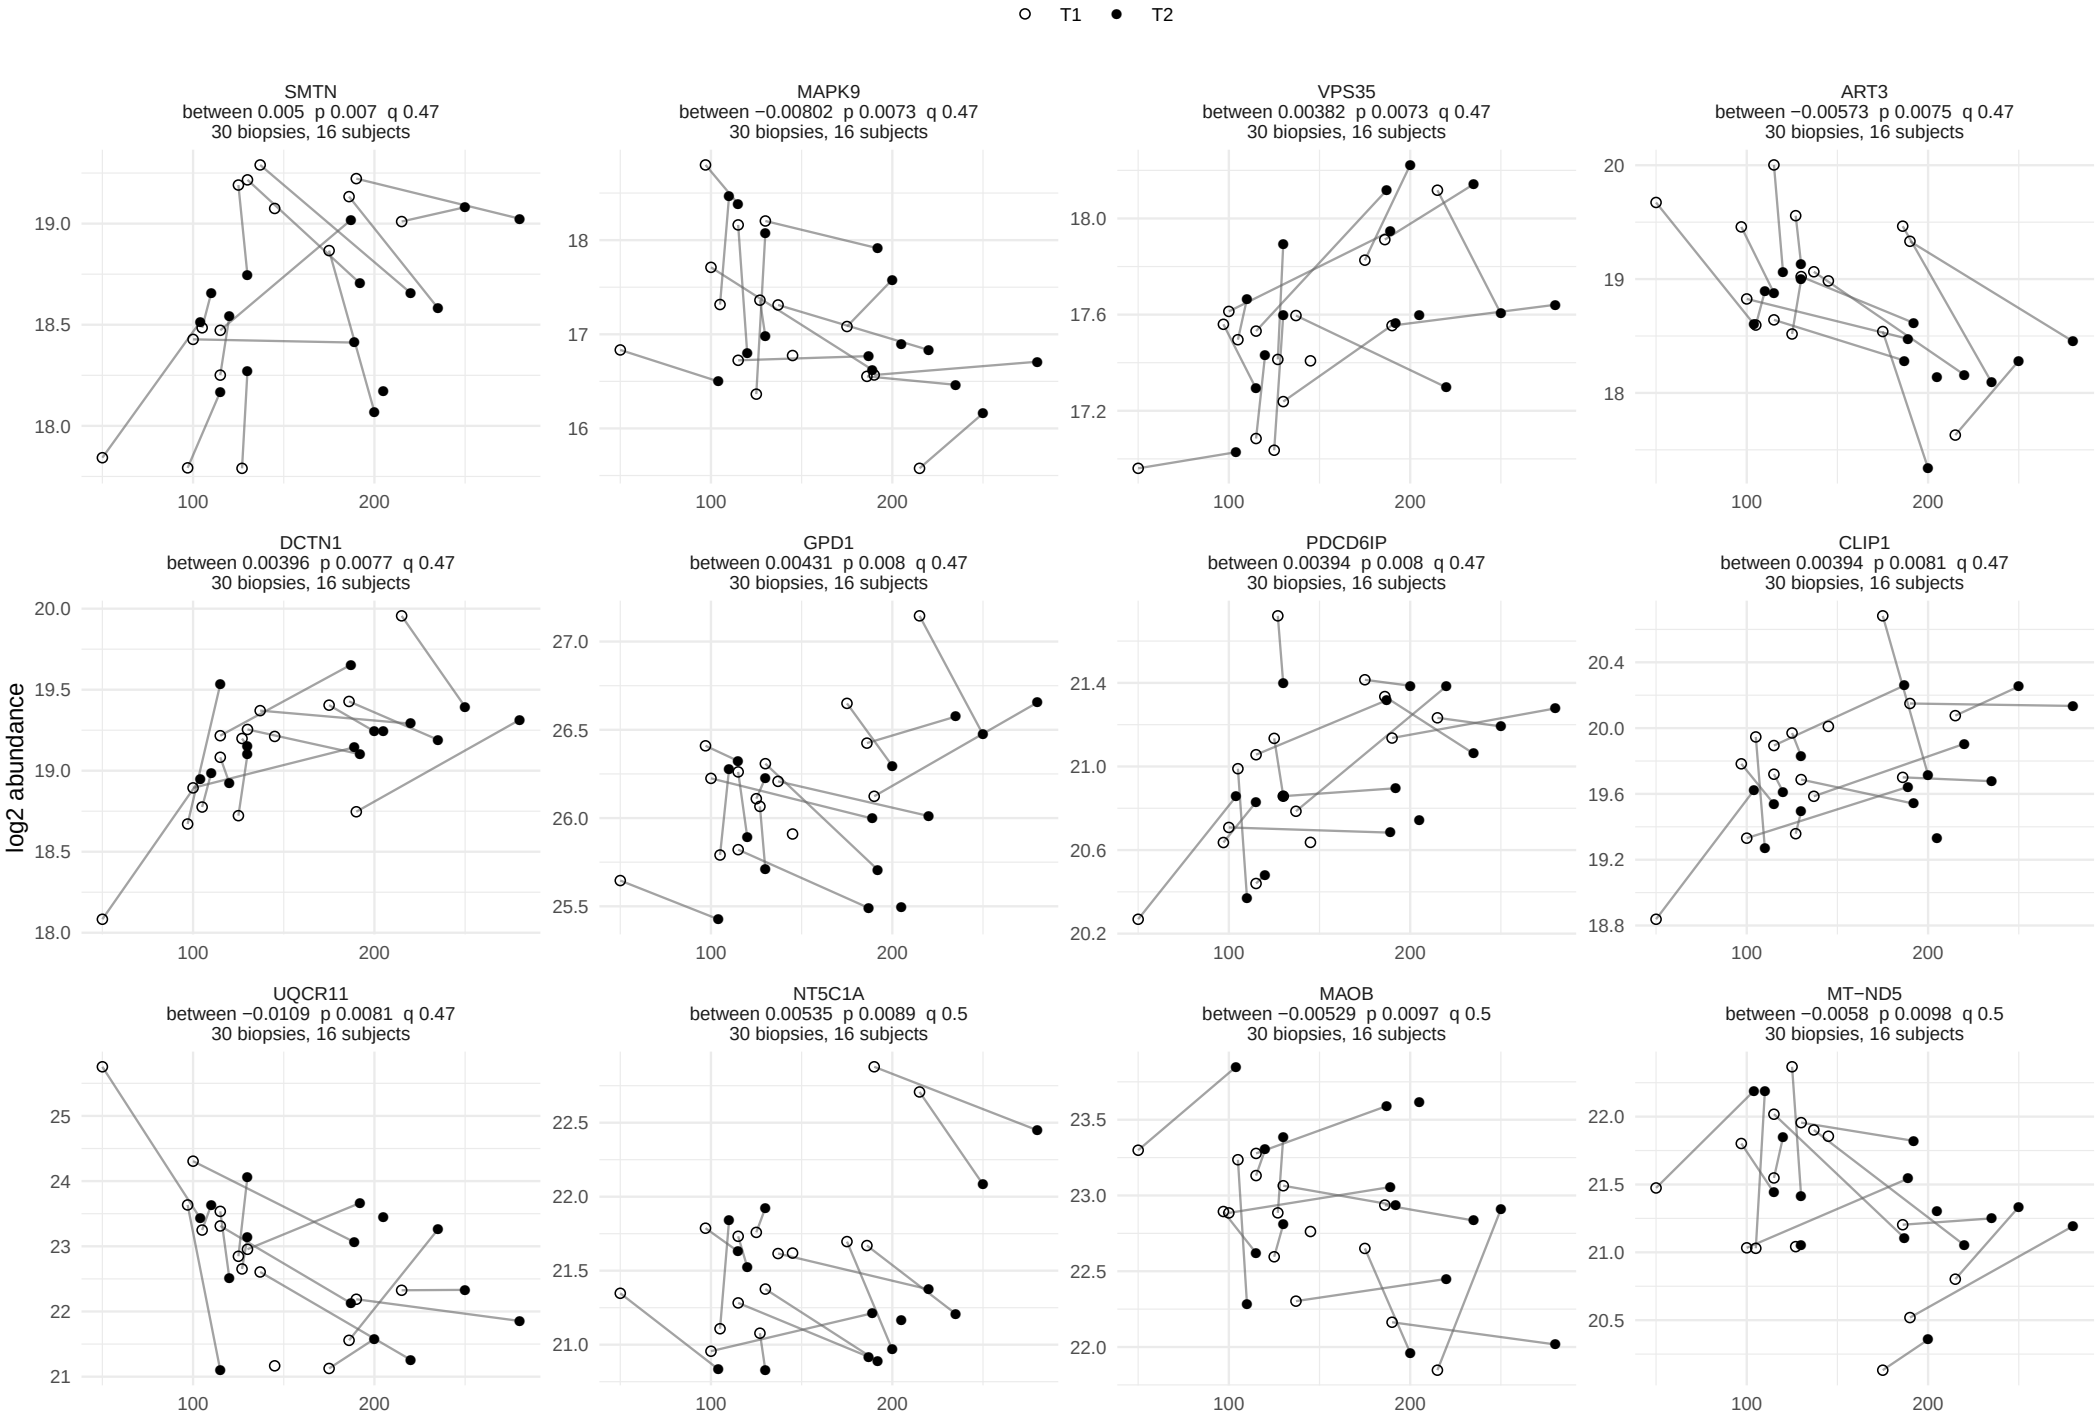

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

leg_press_1rm, between−person term


132 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 4 of 11.

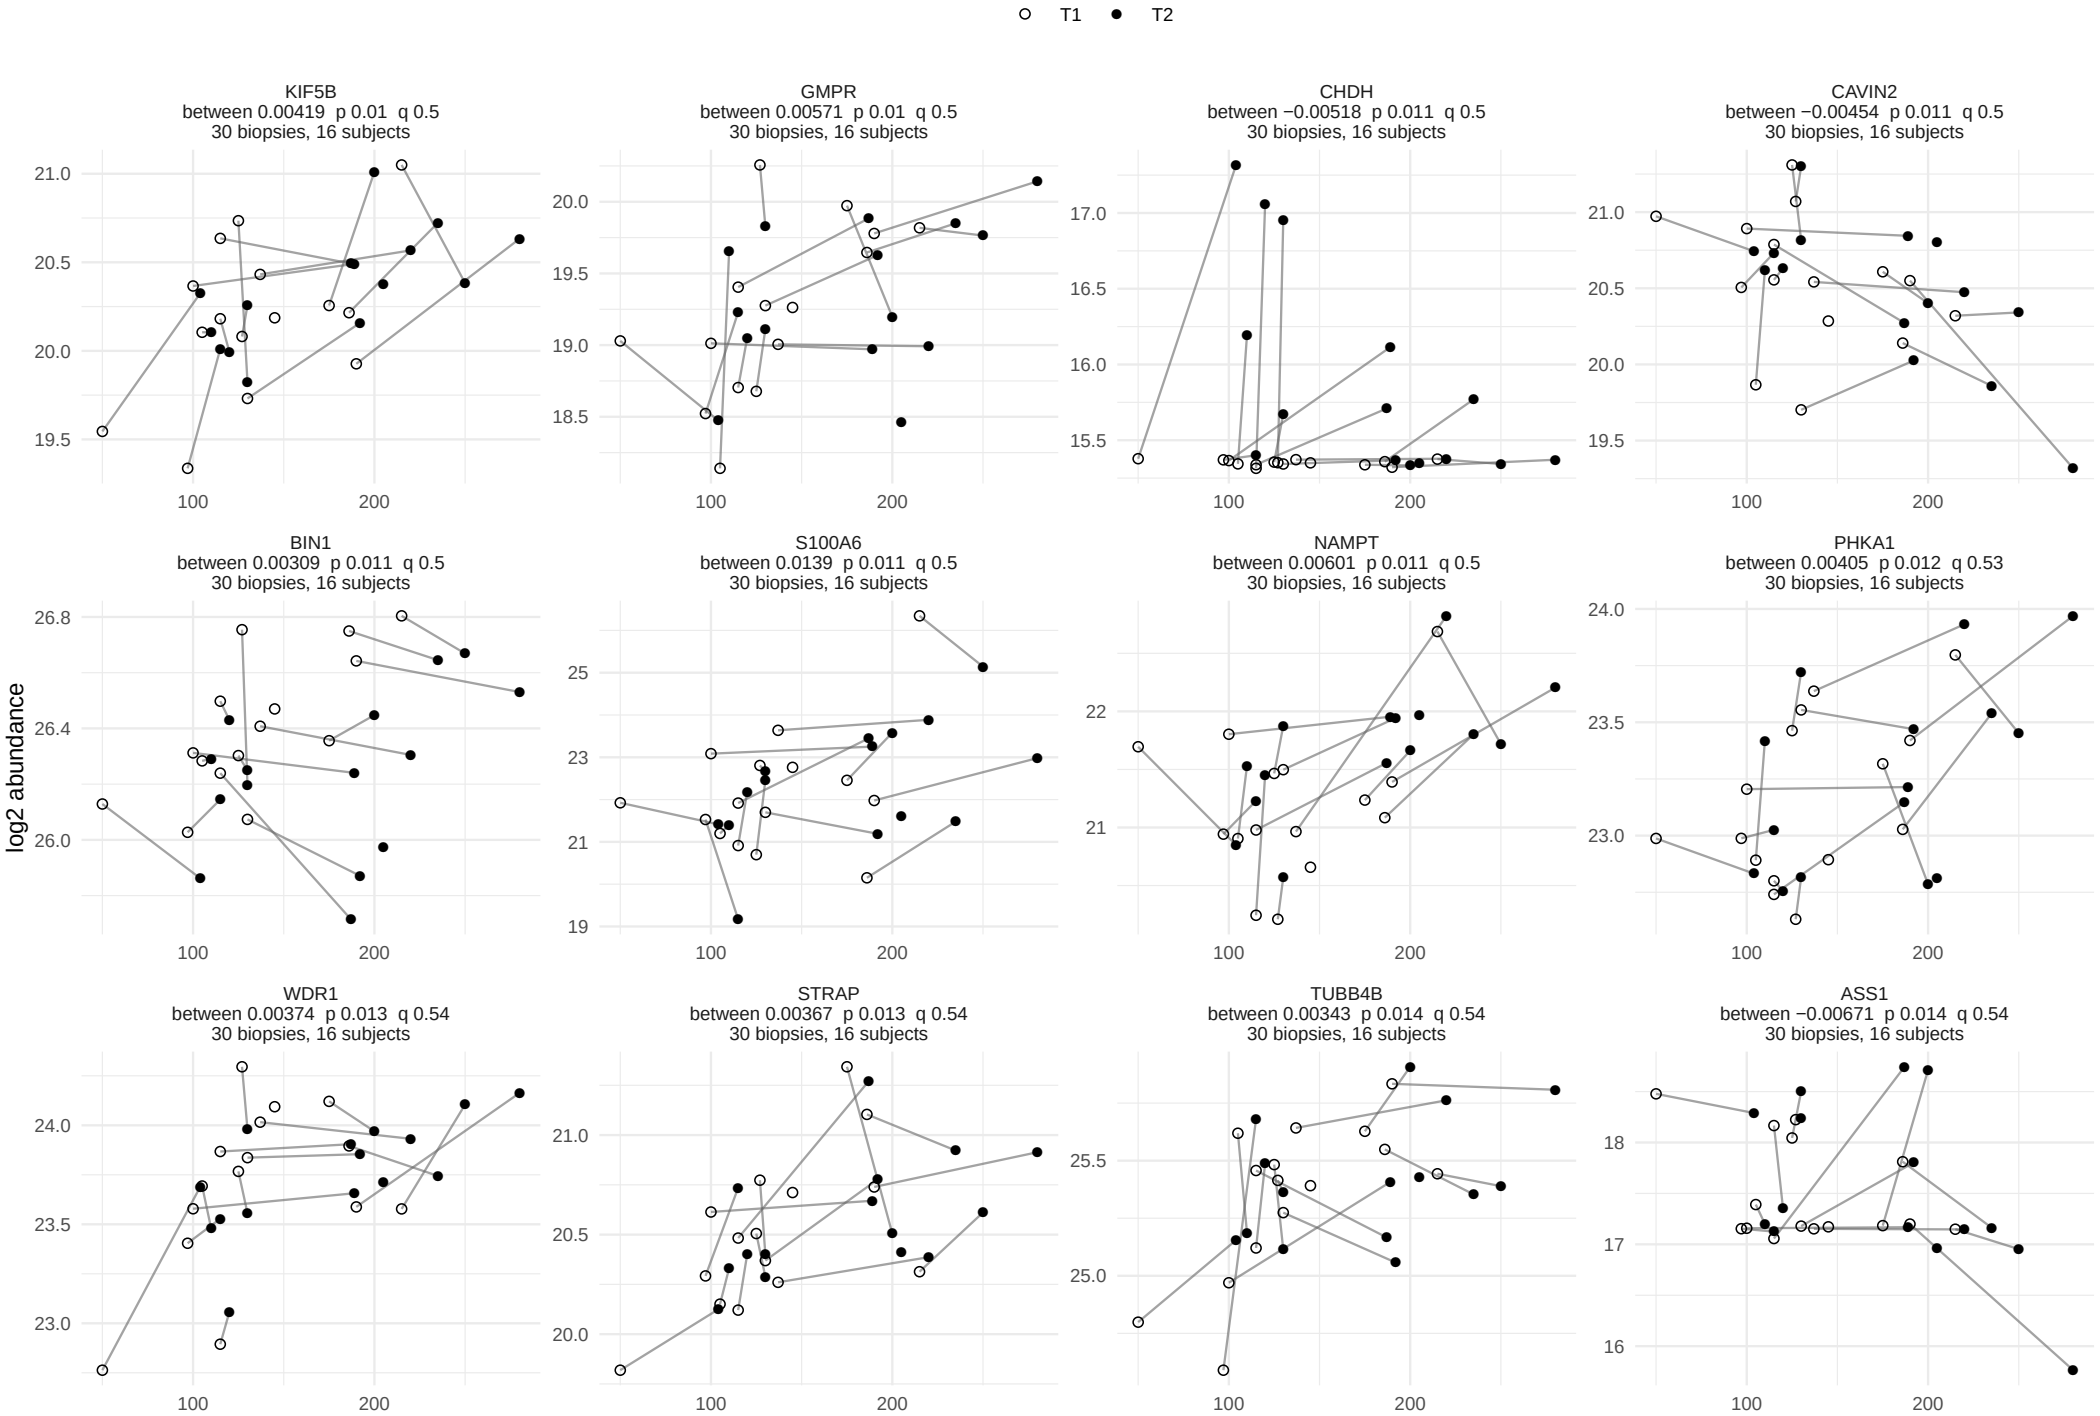

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

leg_press_1rm, between−person term


132 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 5 of 11.

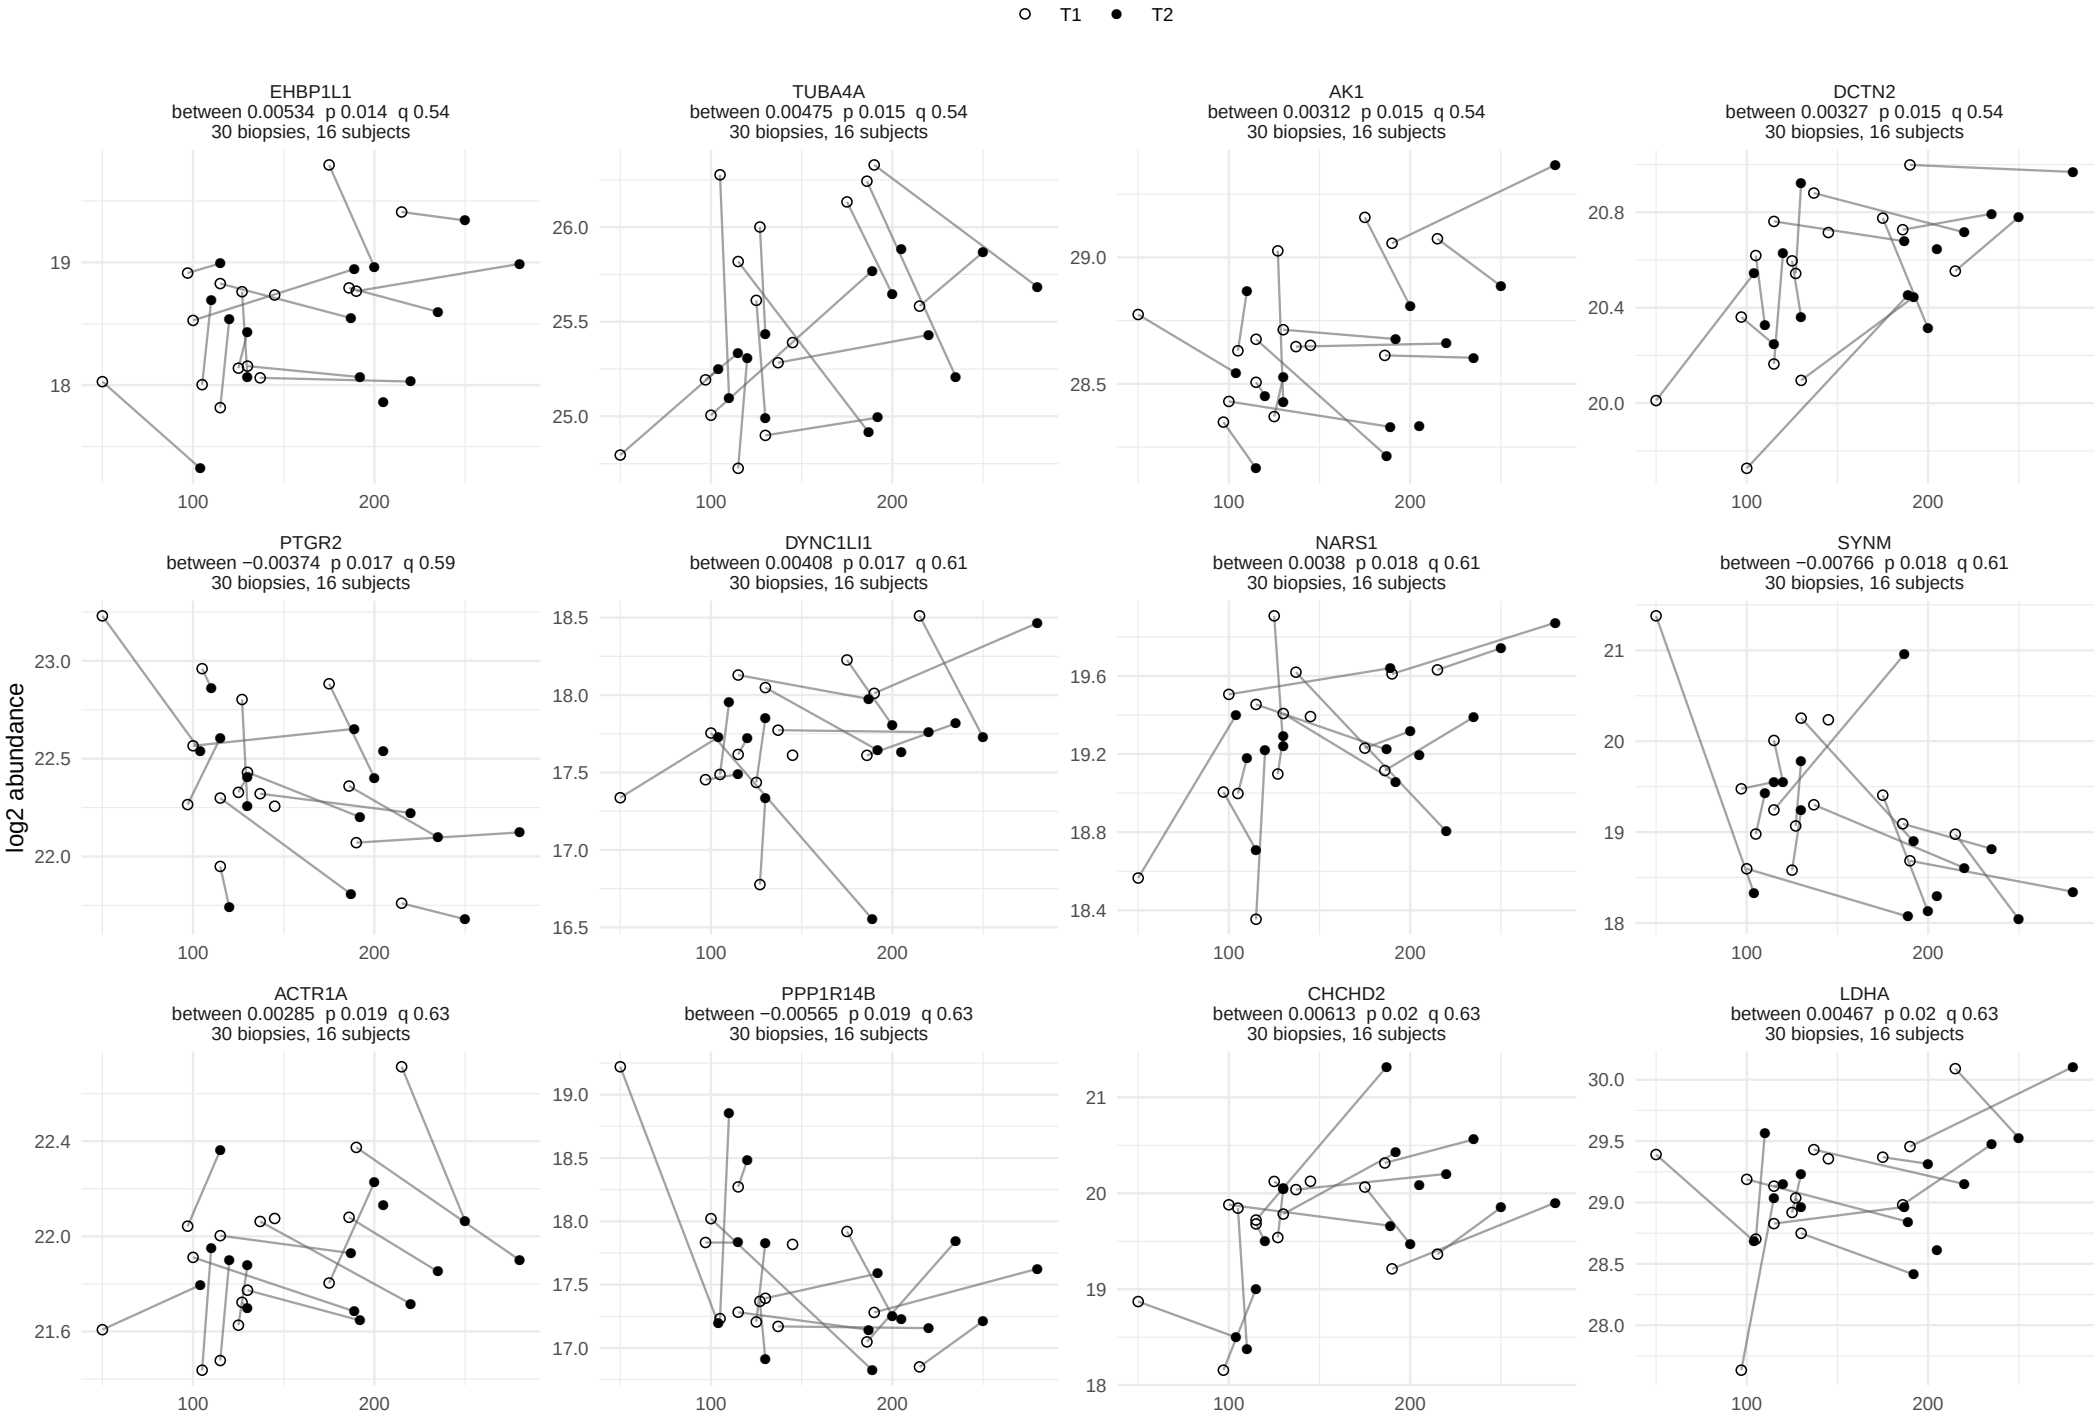

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

leg_press_1rm, between−person term


132 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 6 of 11.

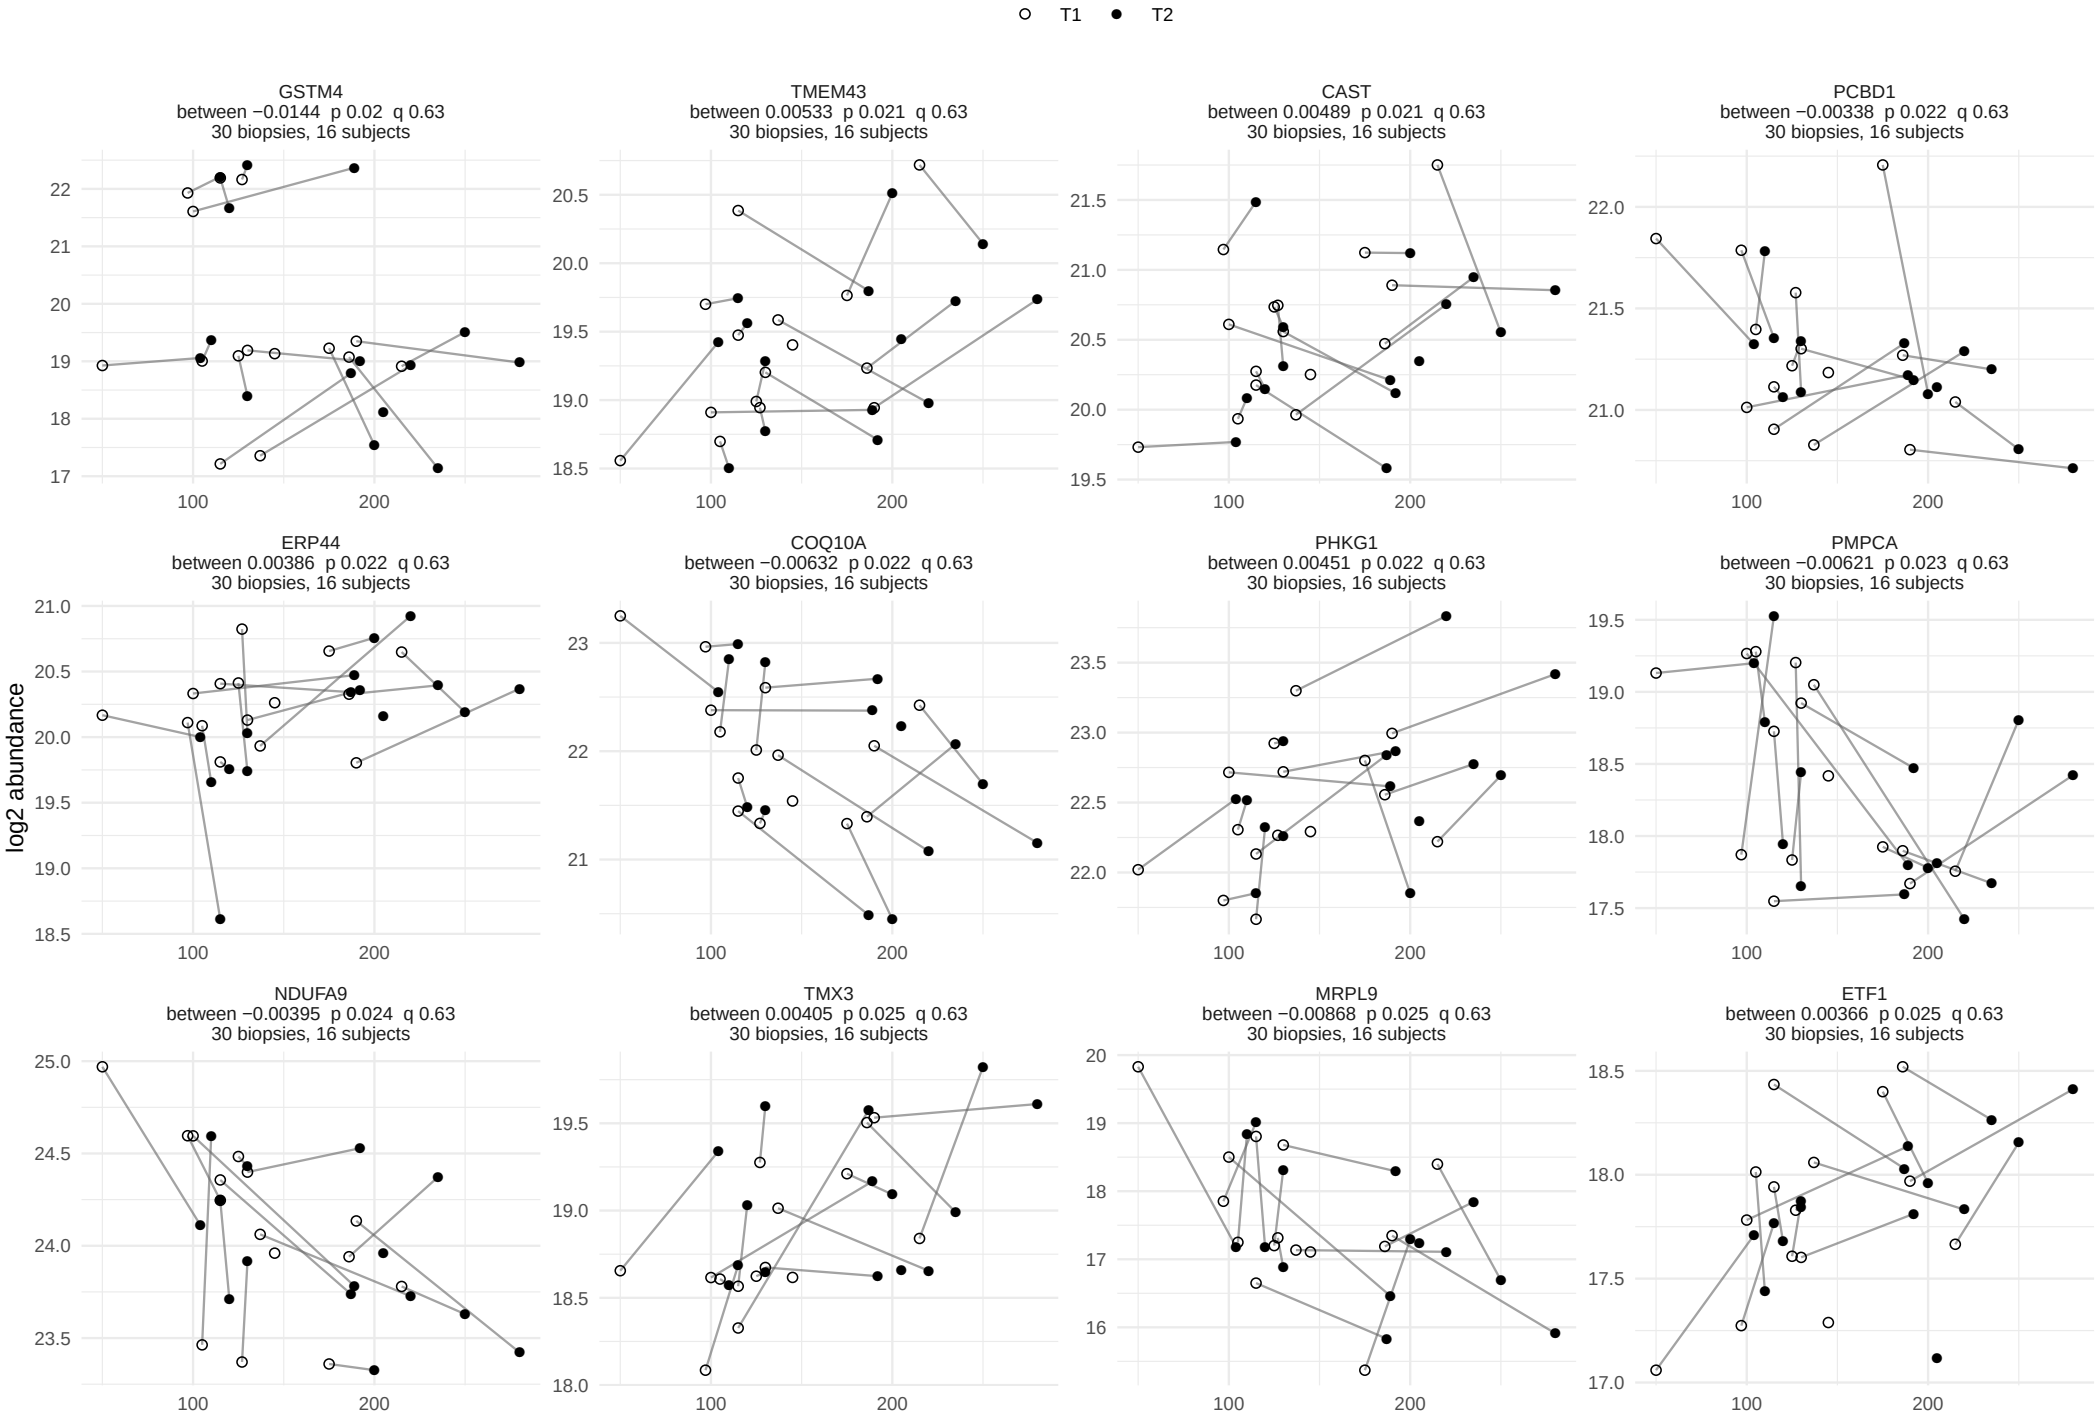

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

leg_press_1rm, between−person term


132 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 7 of 11.

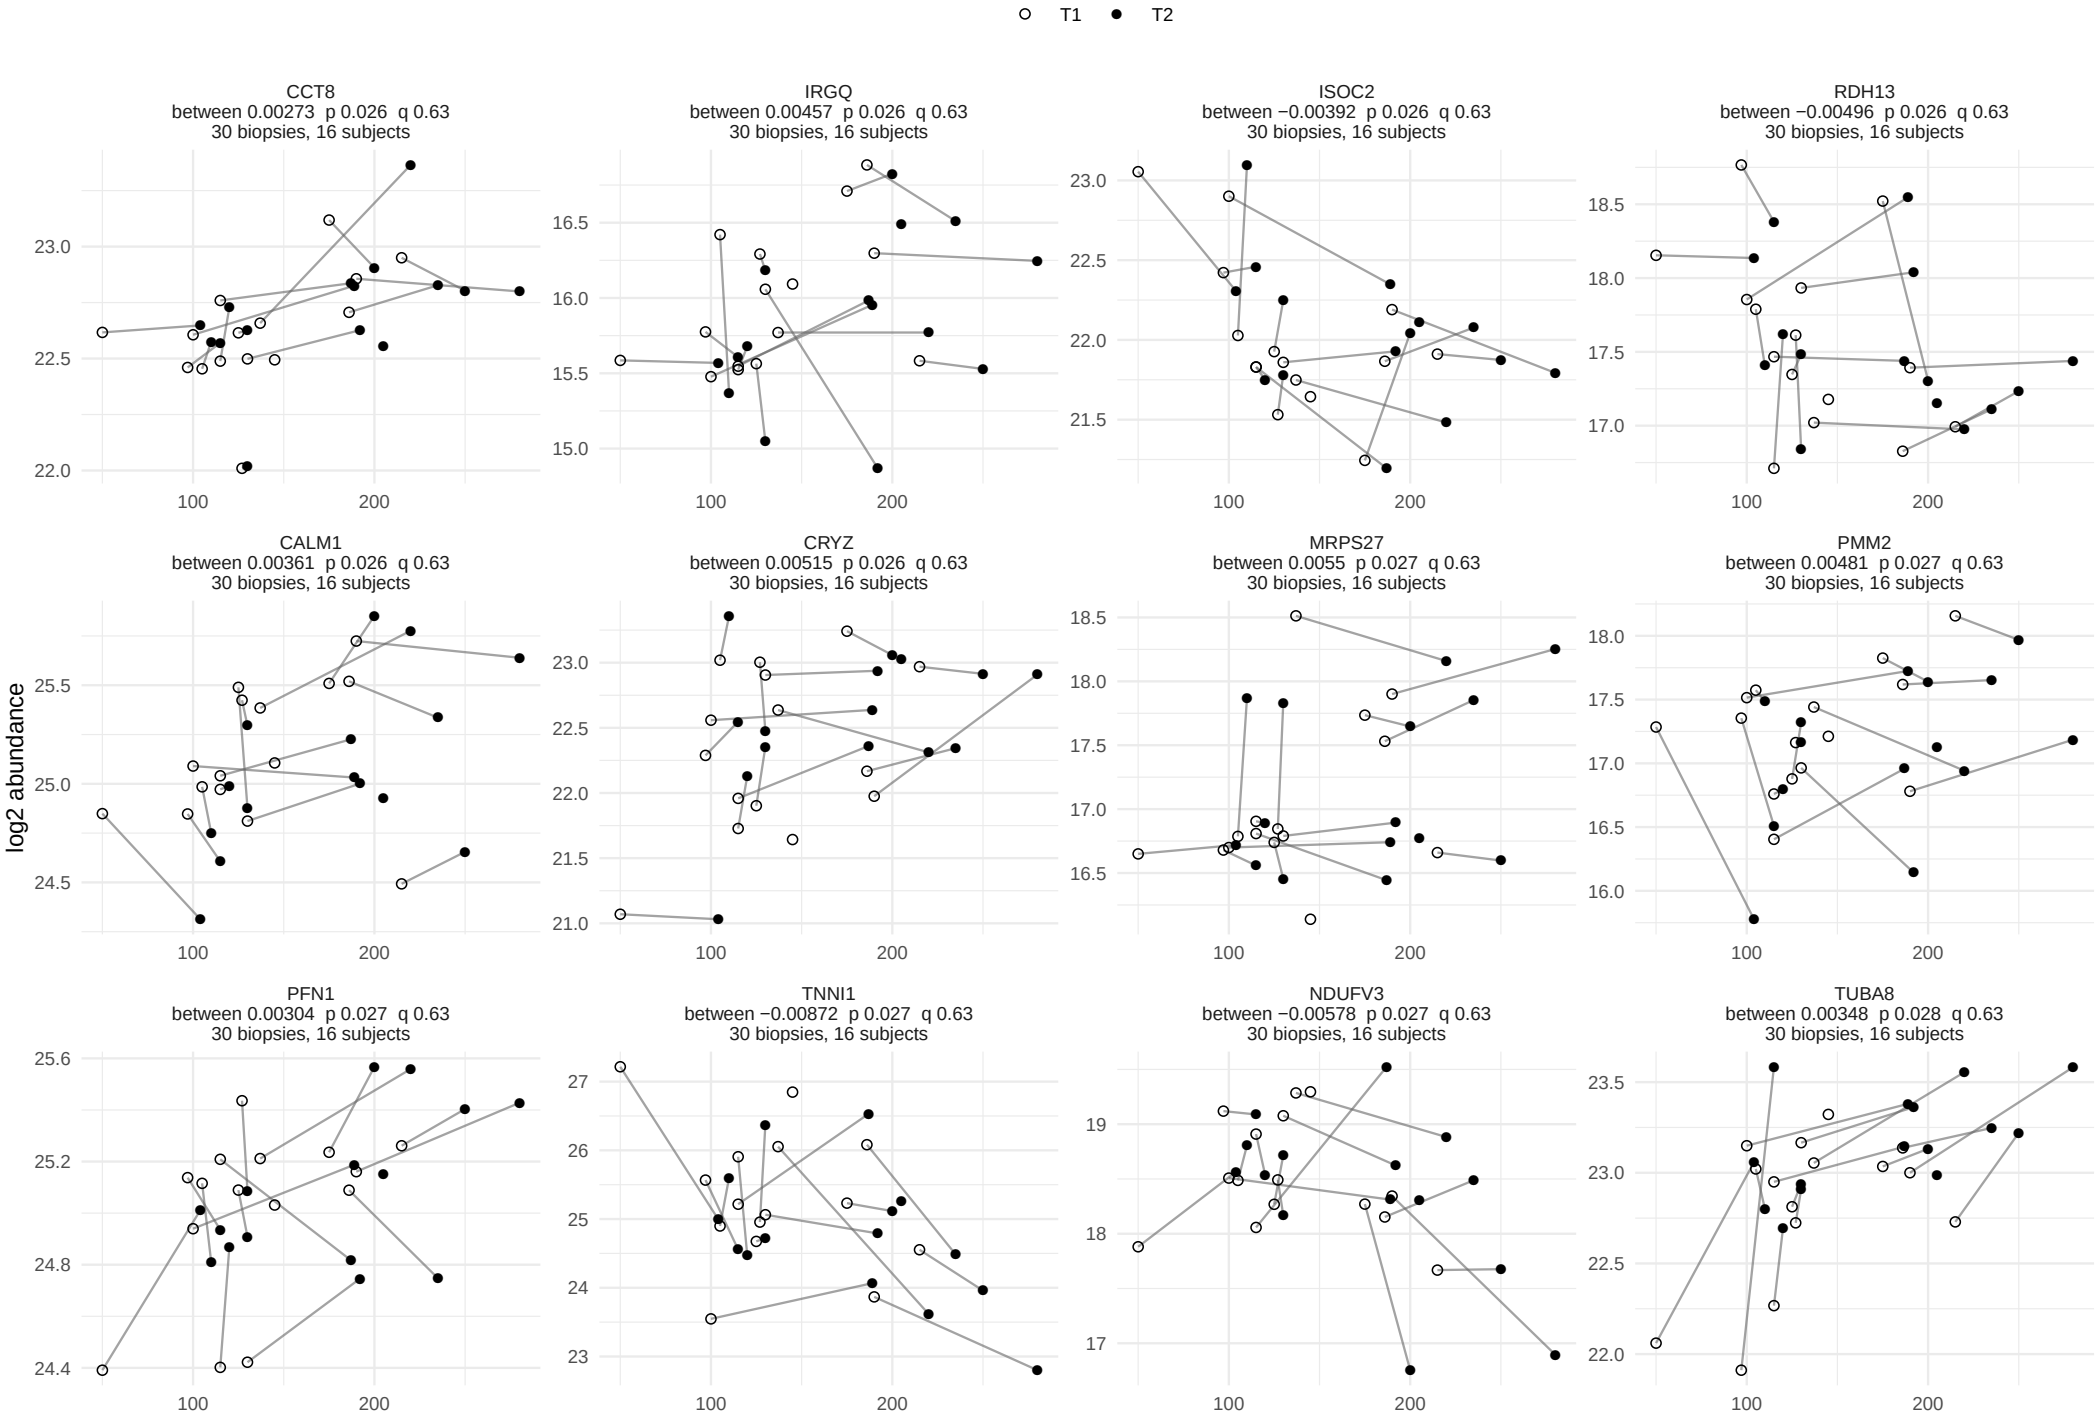

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

leg_press_1rm, between−person term


132 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 8 of 11.

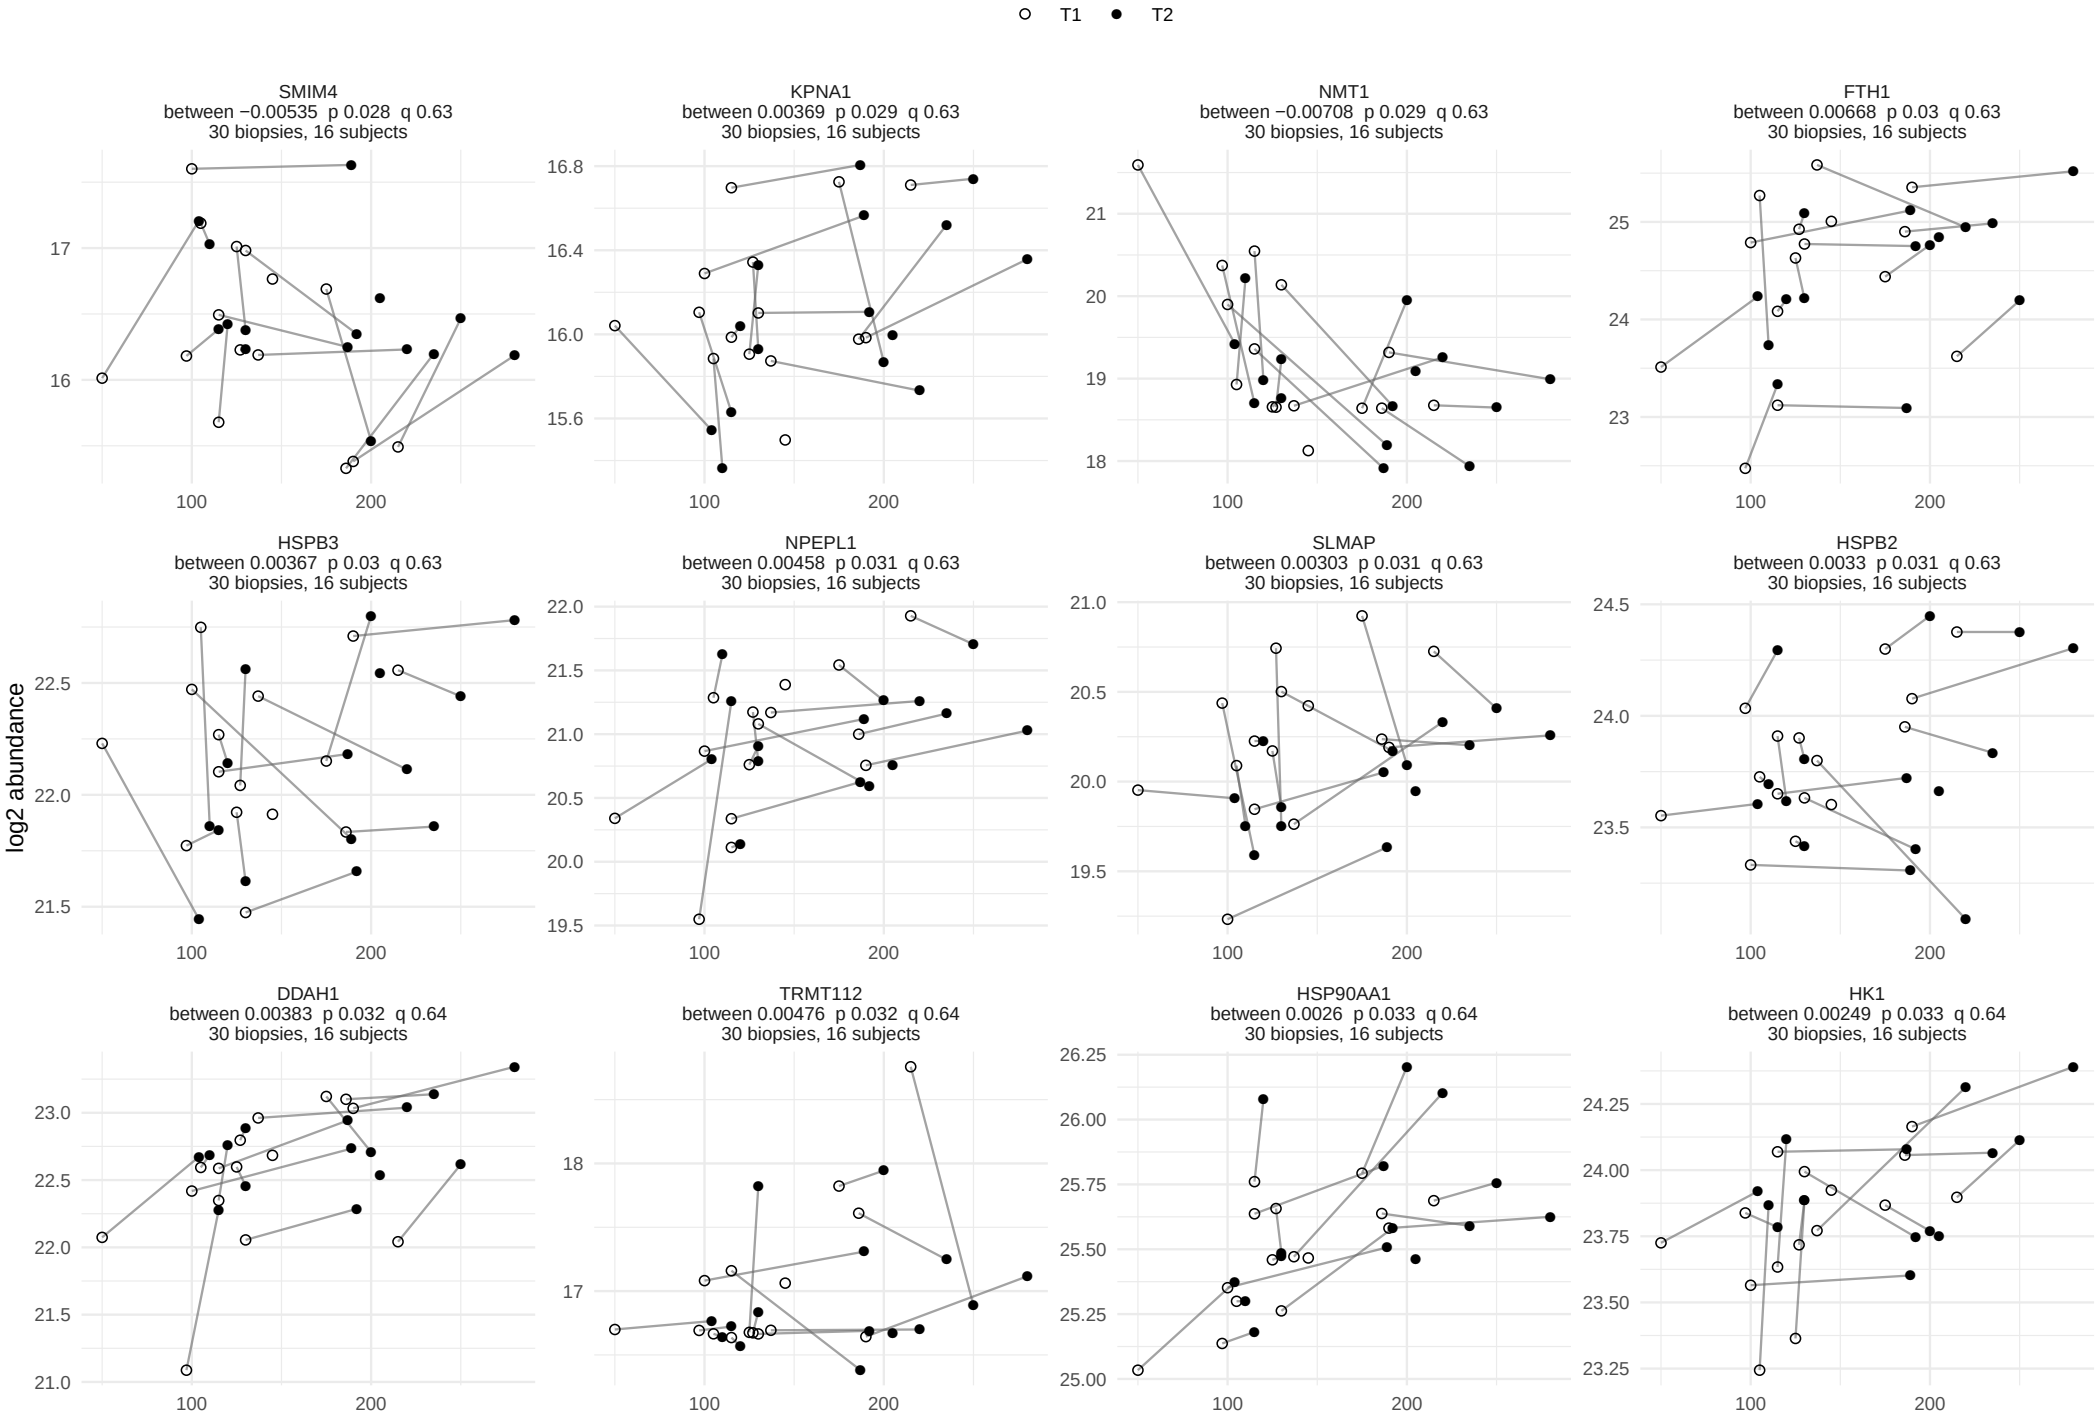

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

leg_press_1rm, between−person term


132 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 9 of 11.

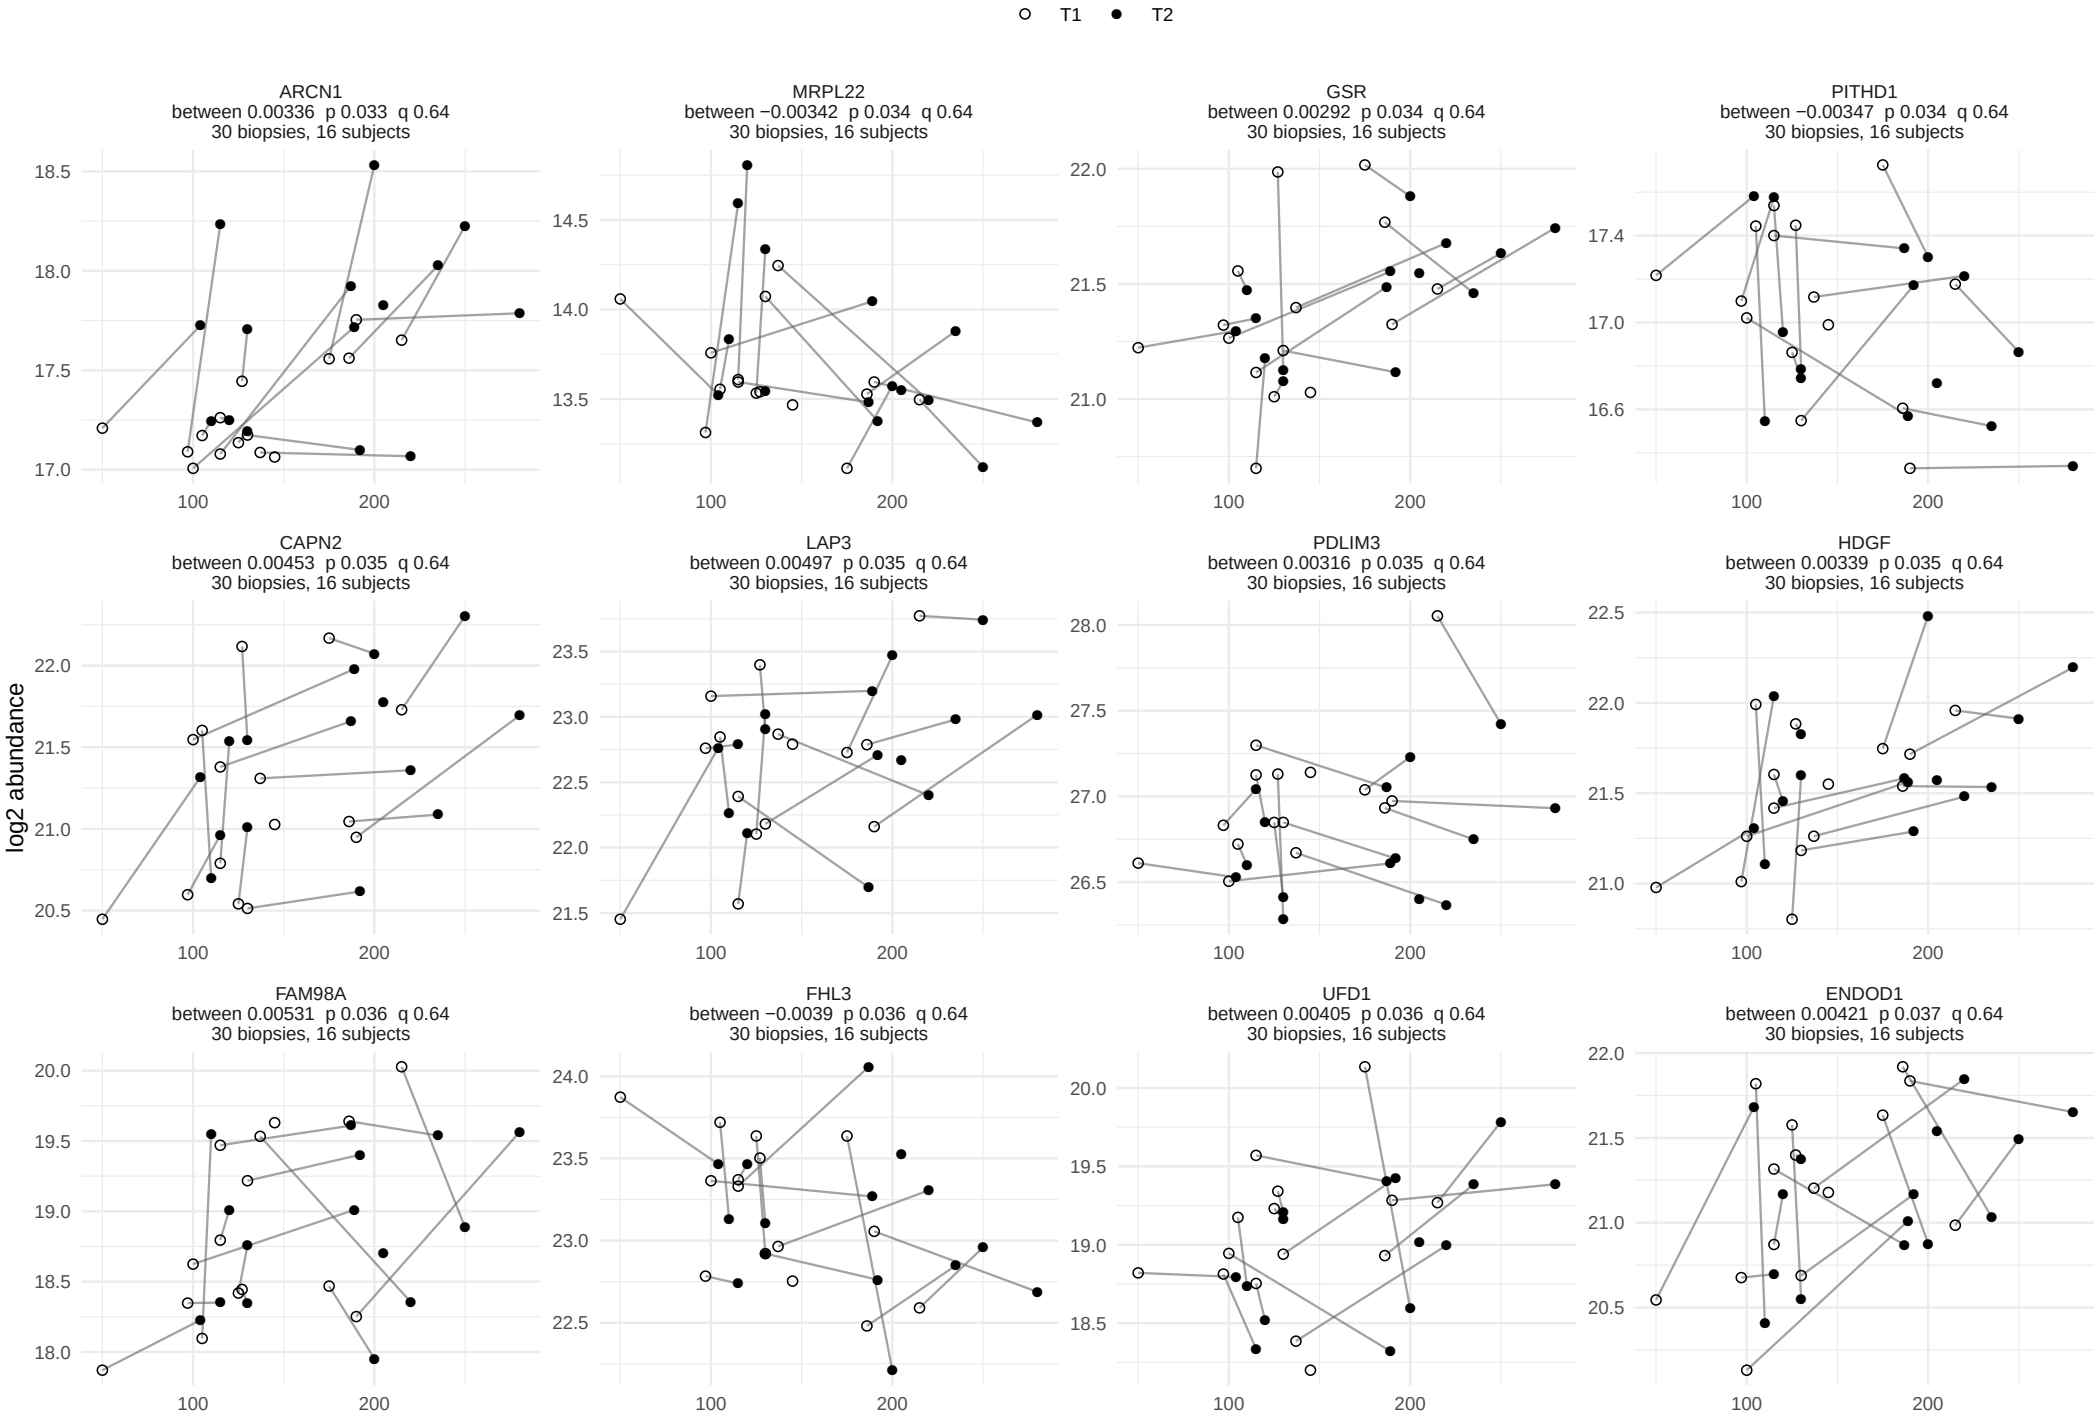

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

leg_press_1rm, between−person term


132 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 10 of 11.

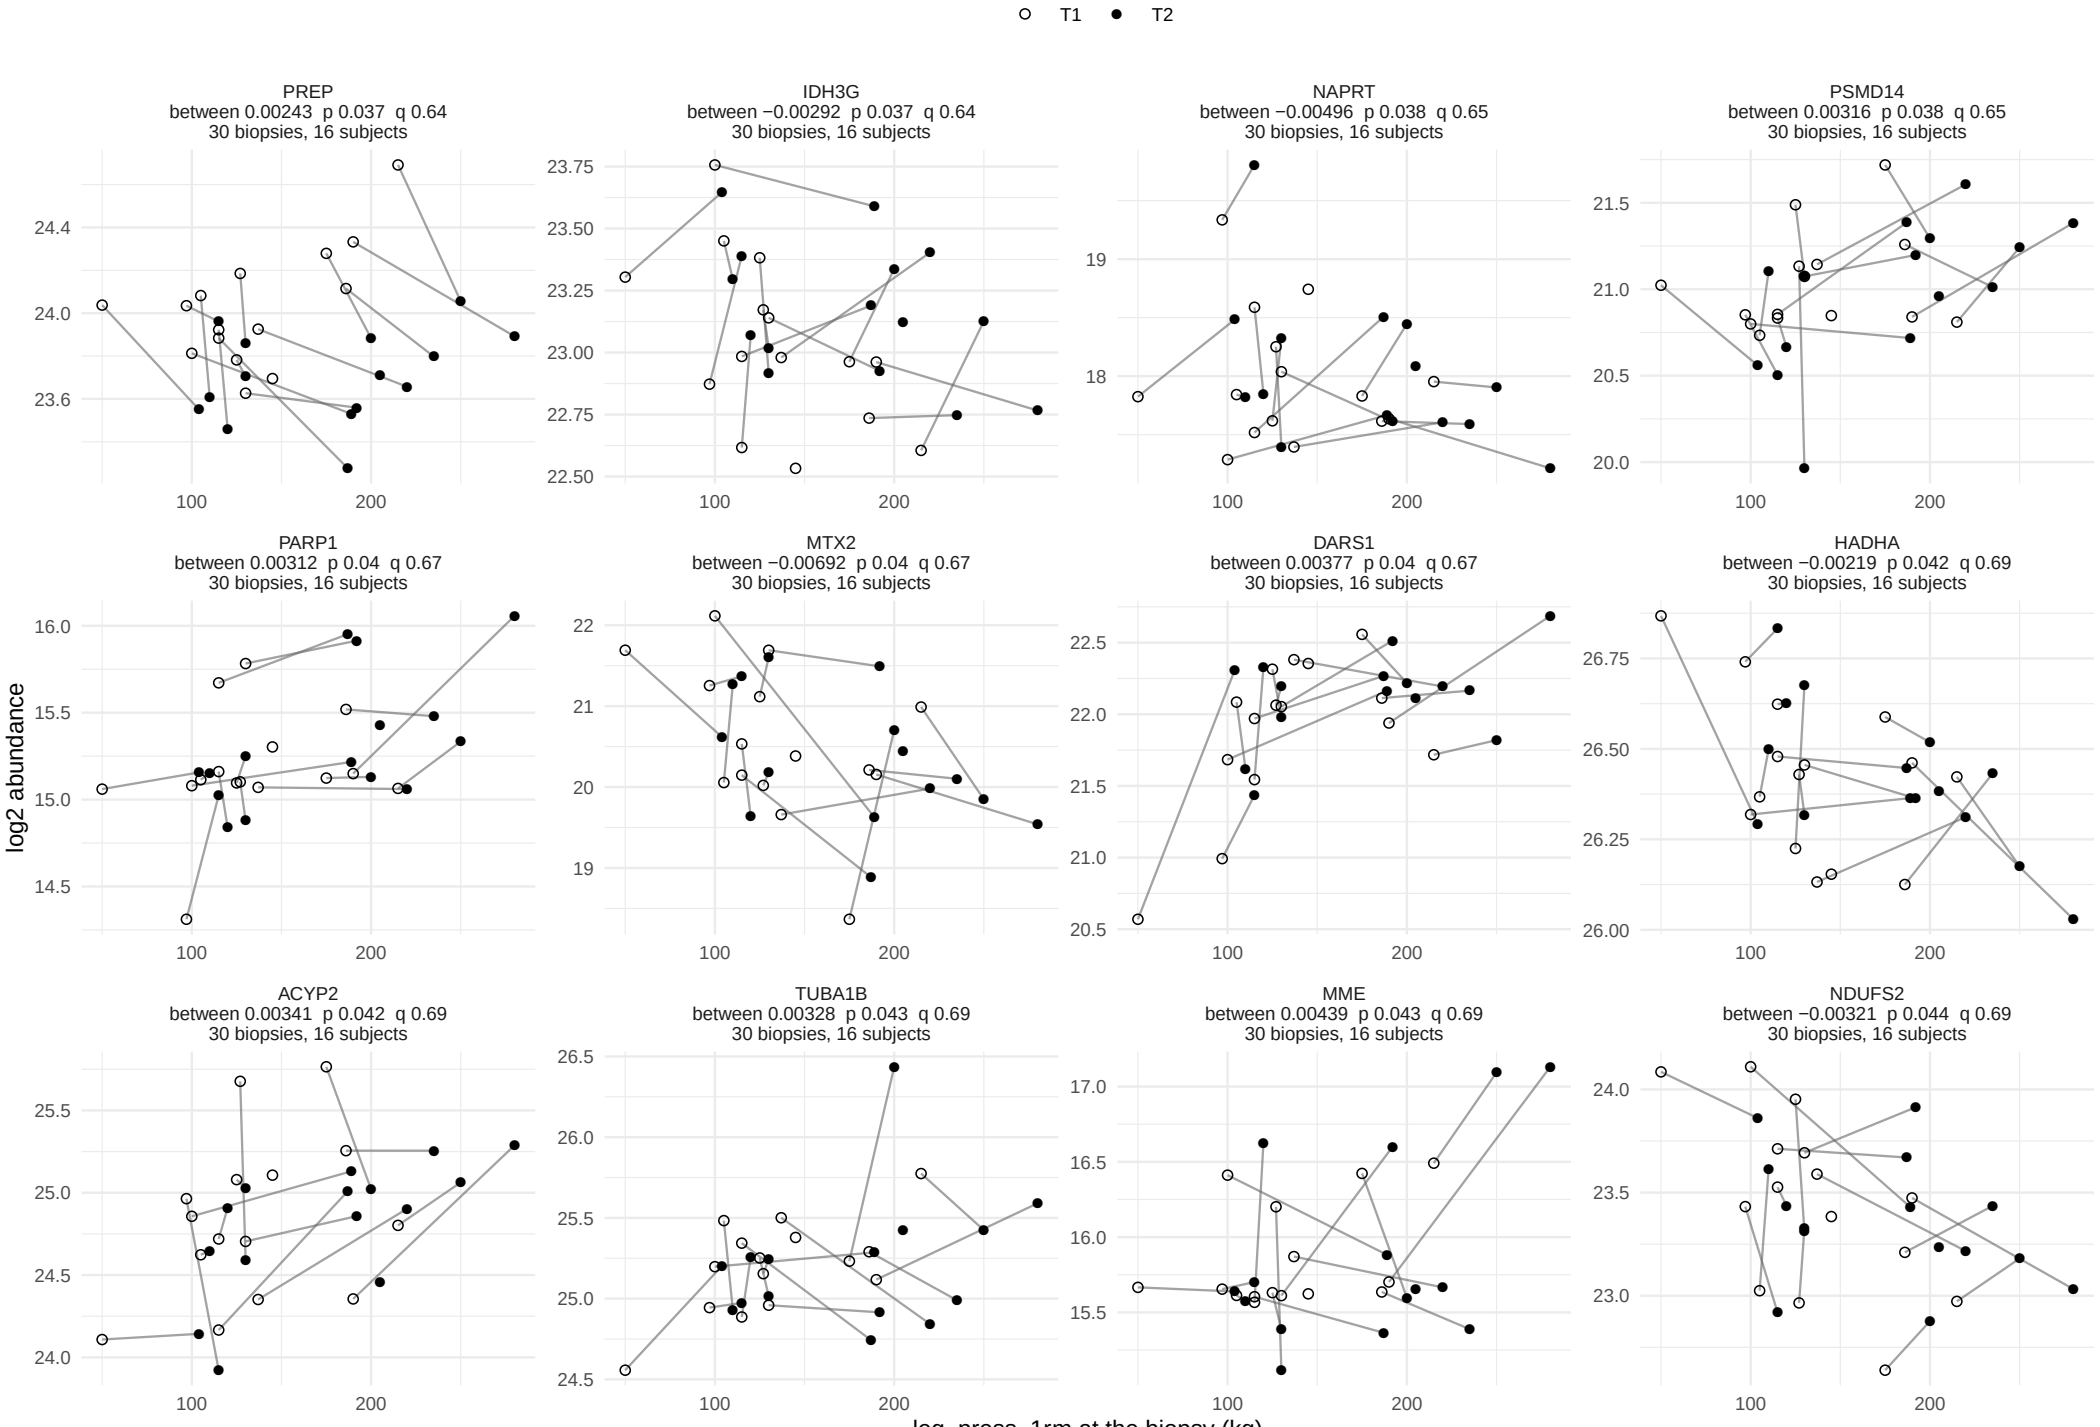

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

leg_press_1rm, between−person term


132 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 11 of 11.

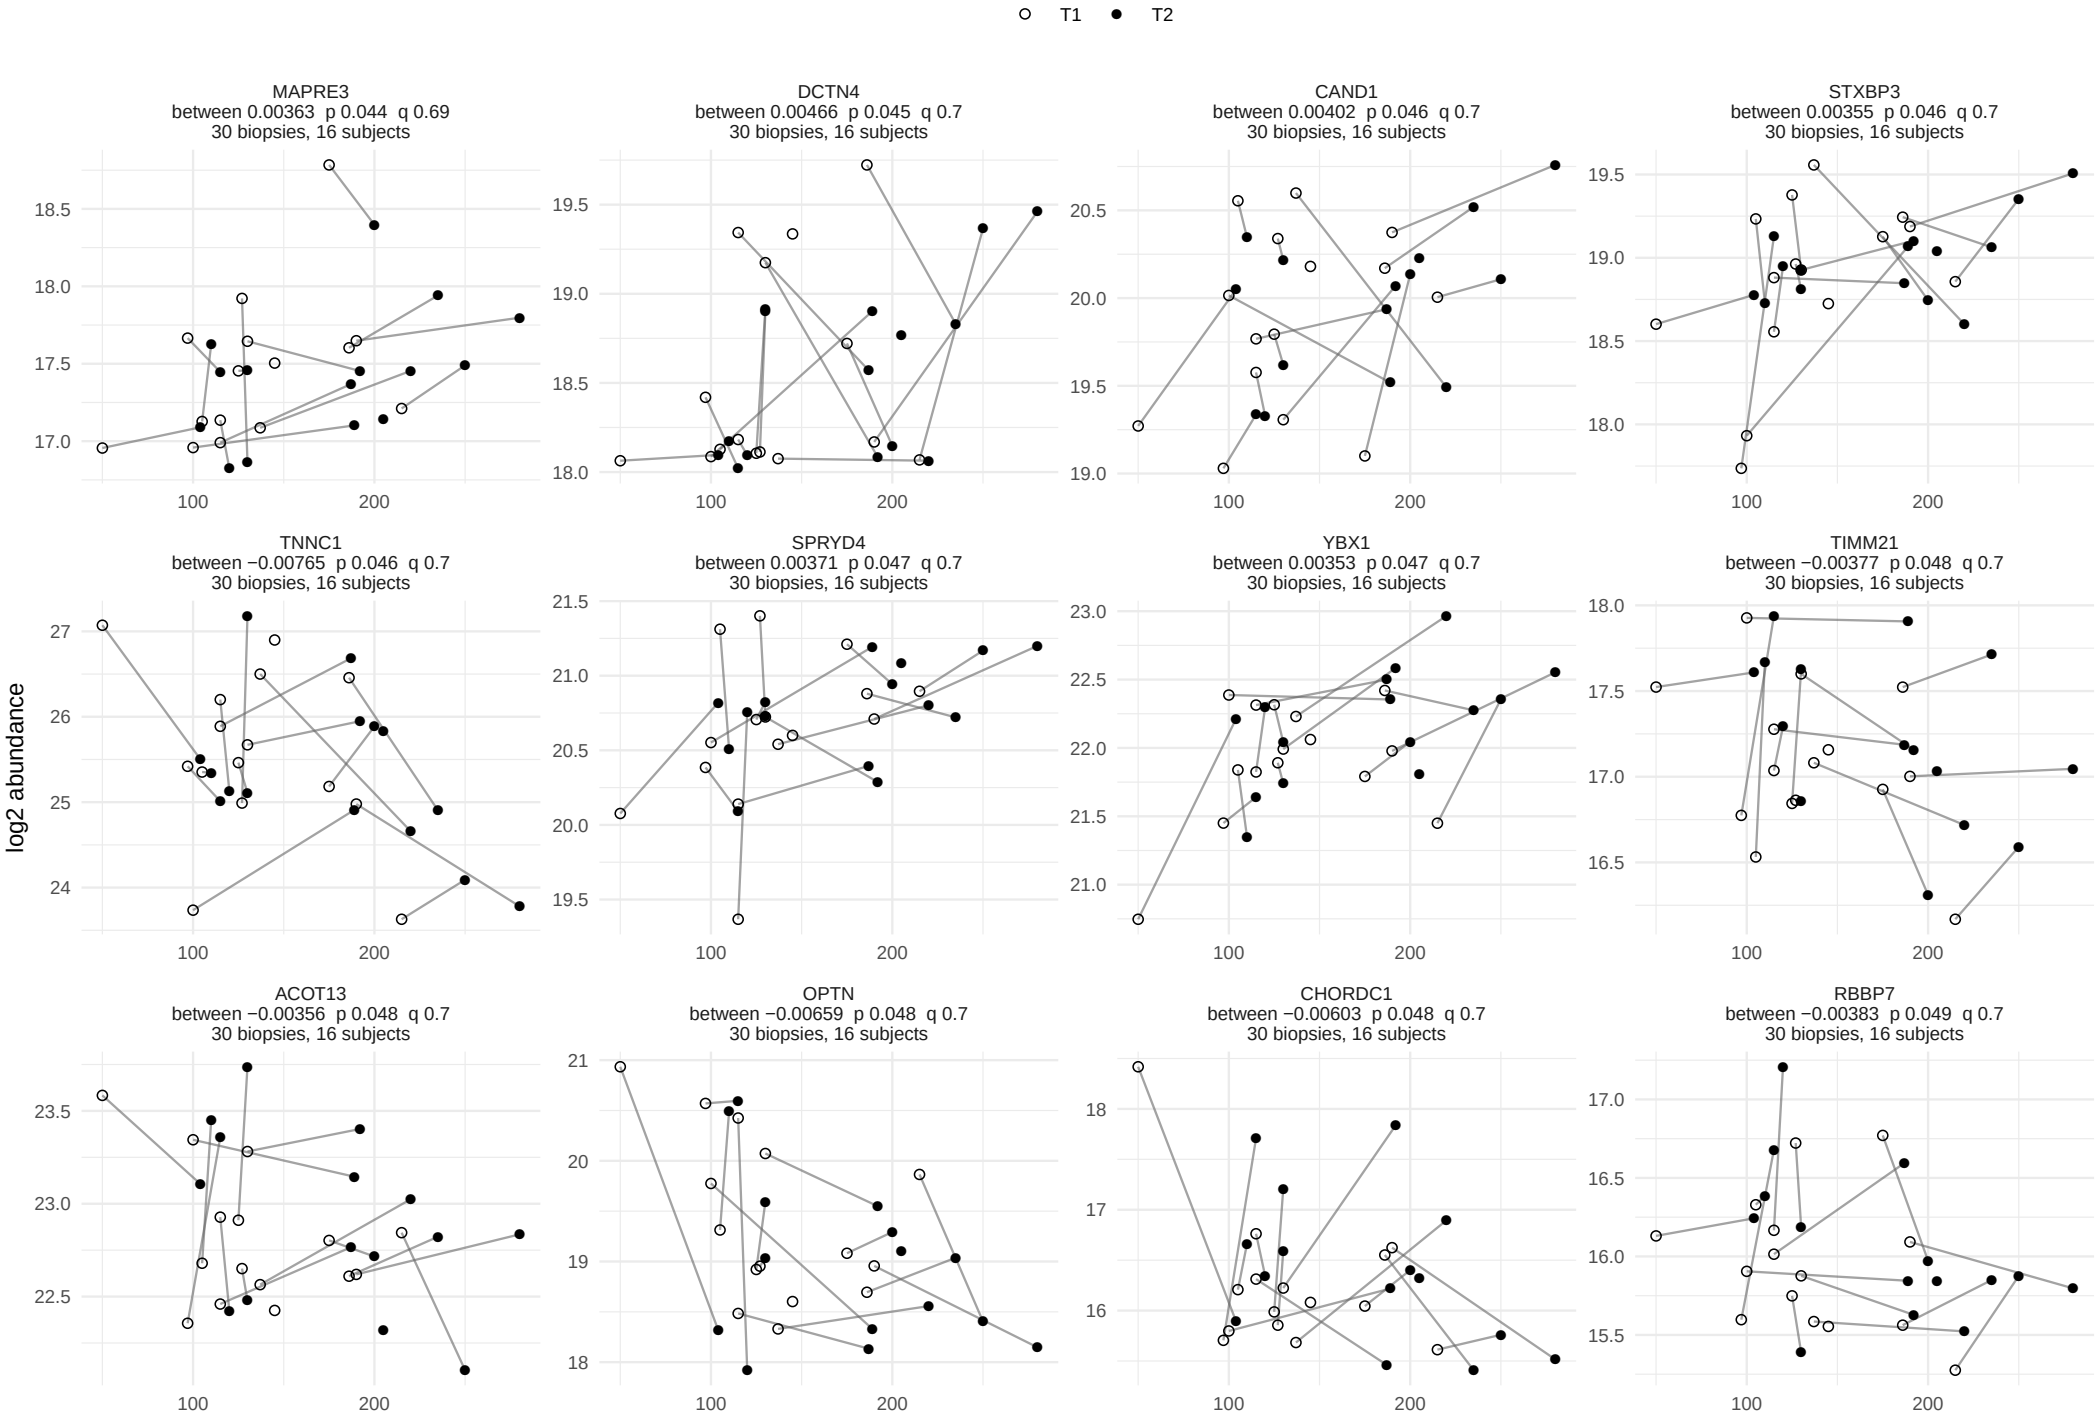

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

leg_ext_1rm, within−person term


134 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 1 of 12.

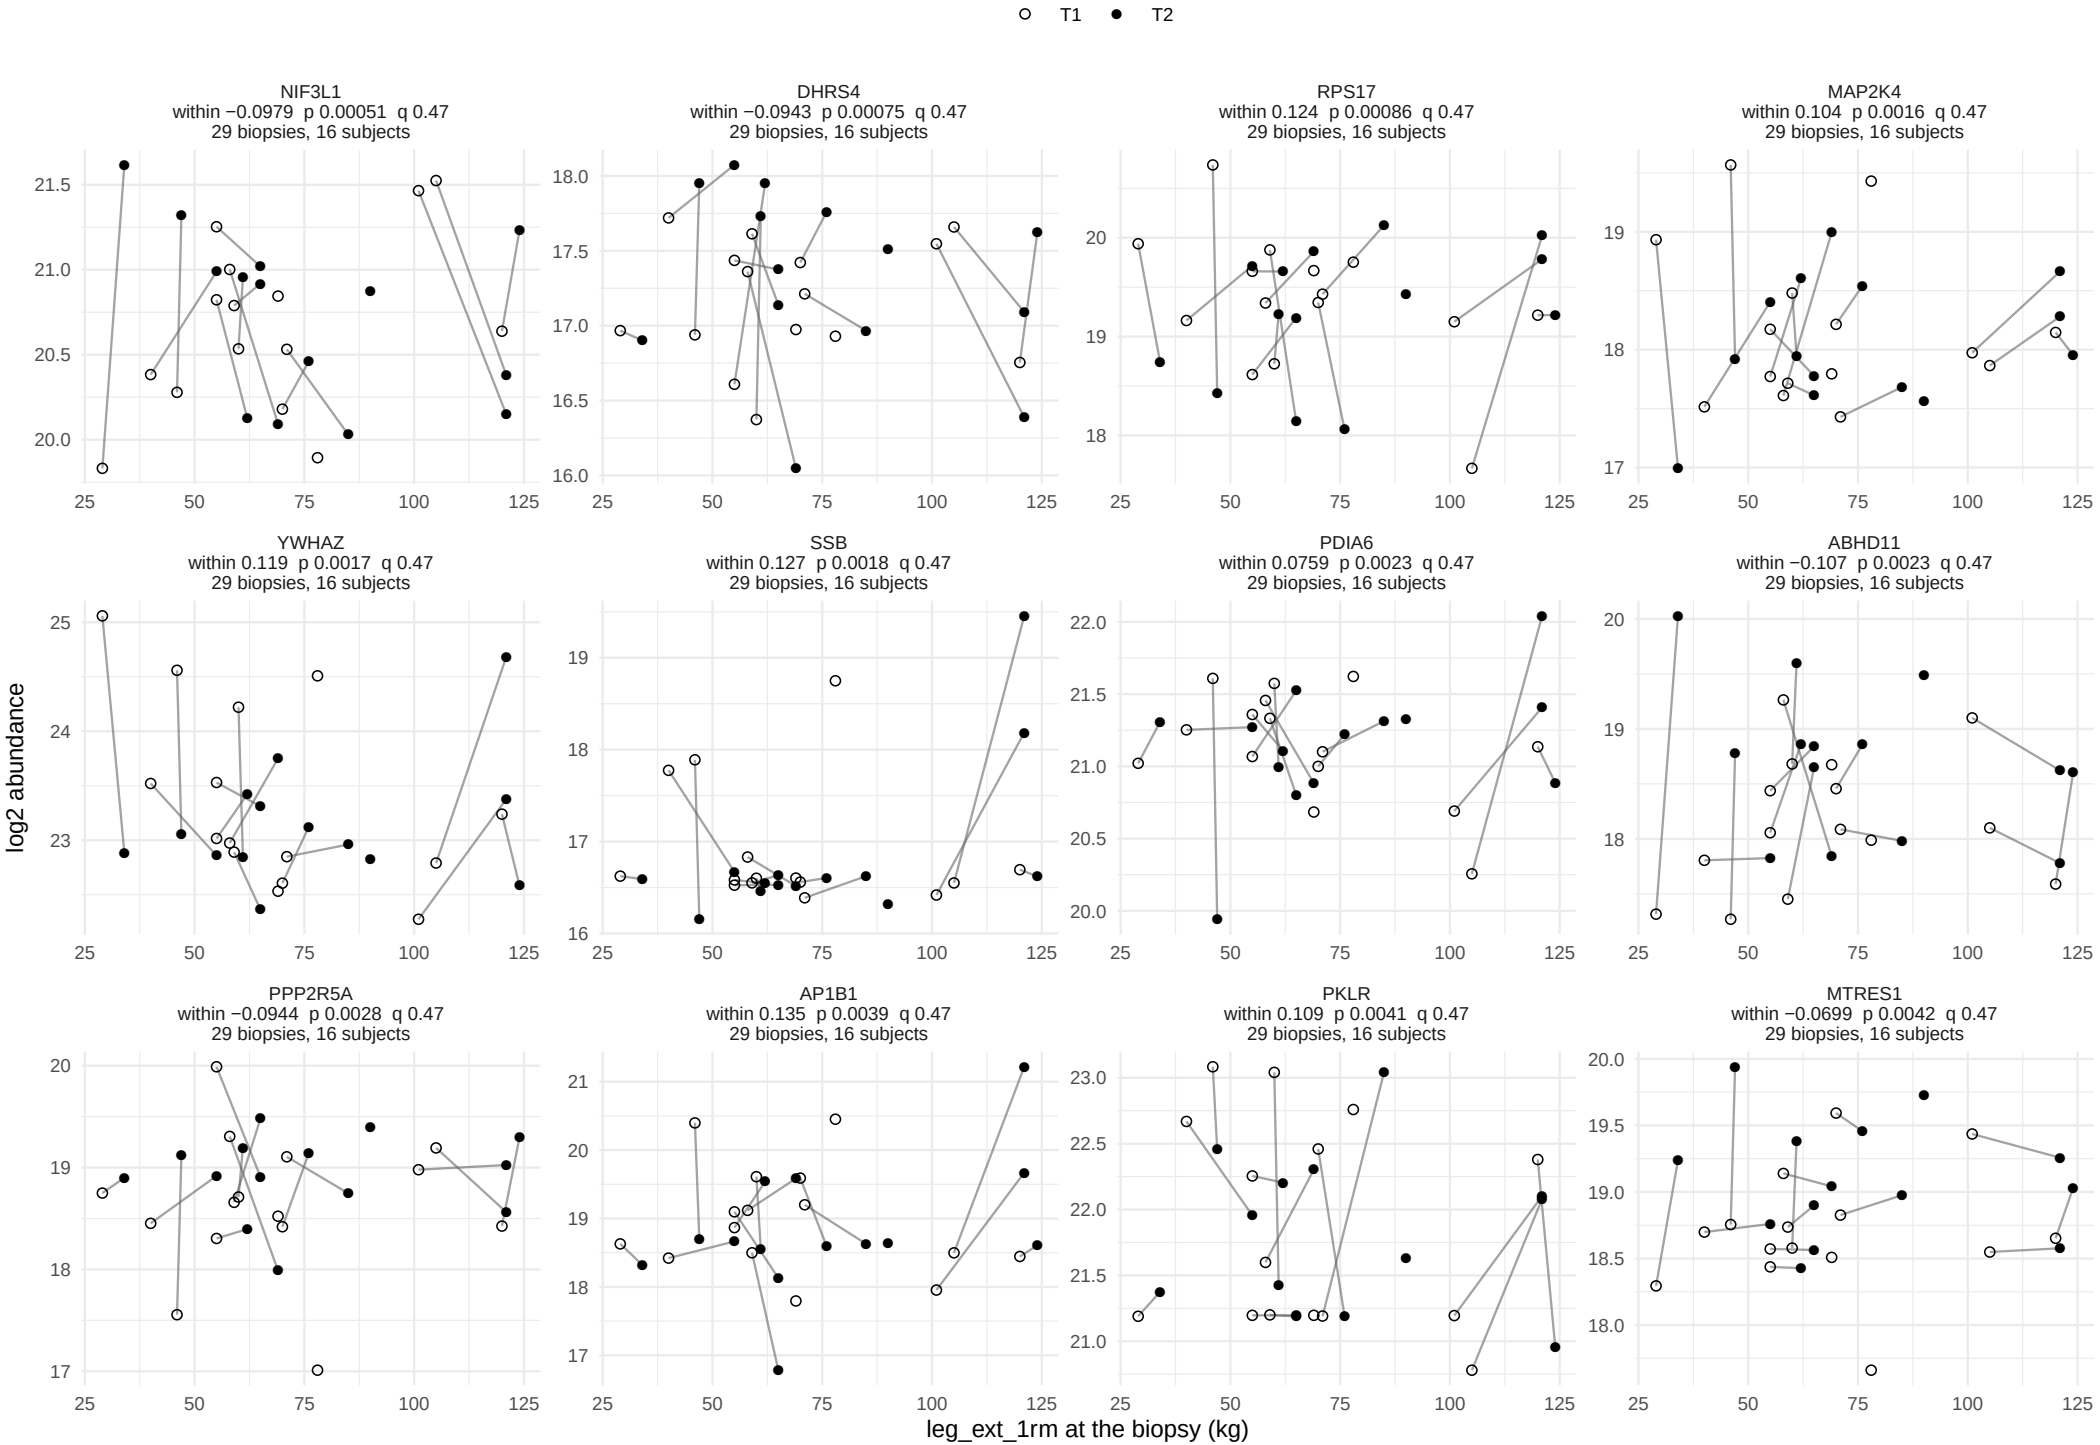

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

leg_ext_1rm, within−person term


134 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 2 of 12.

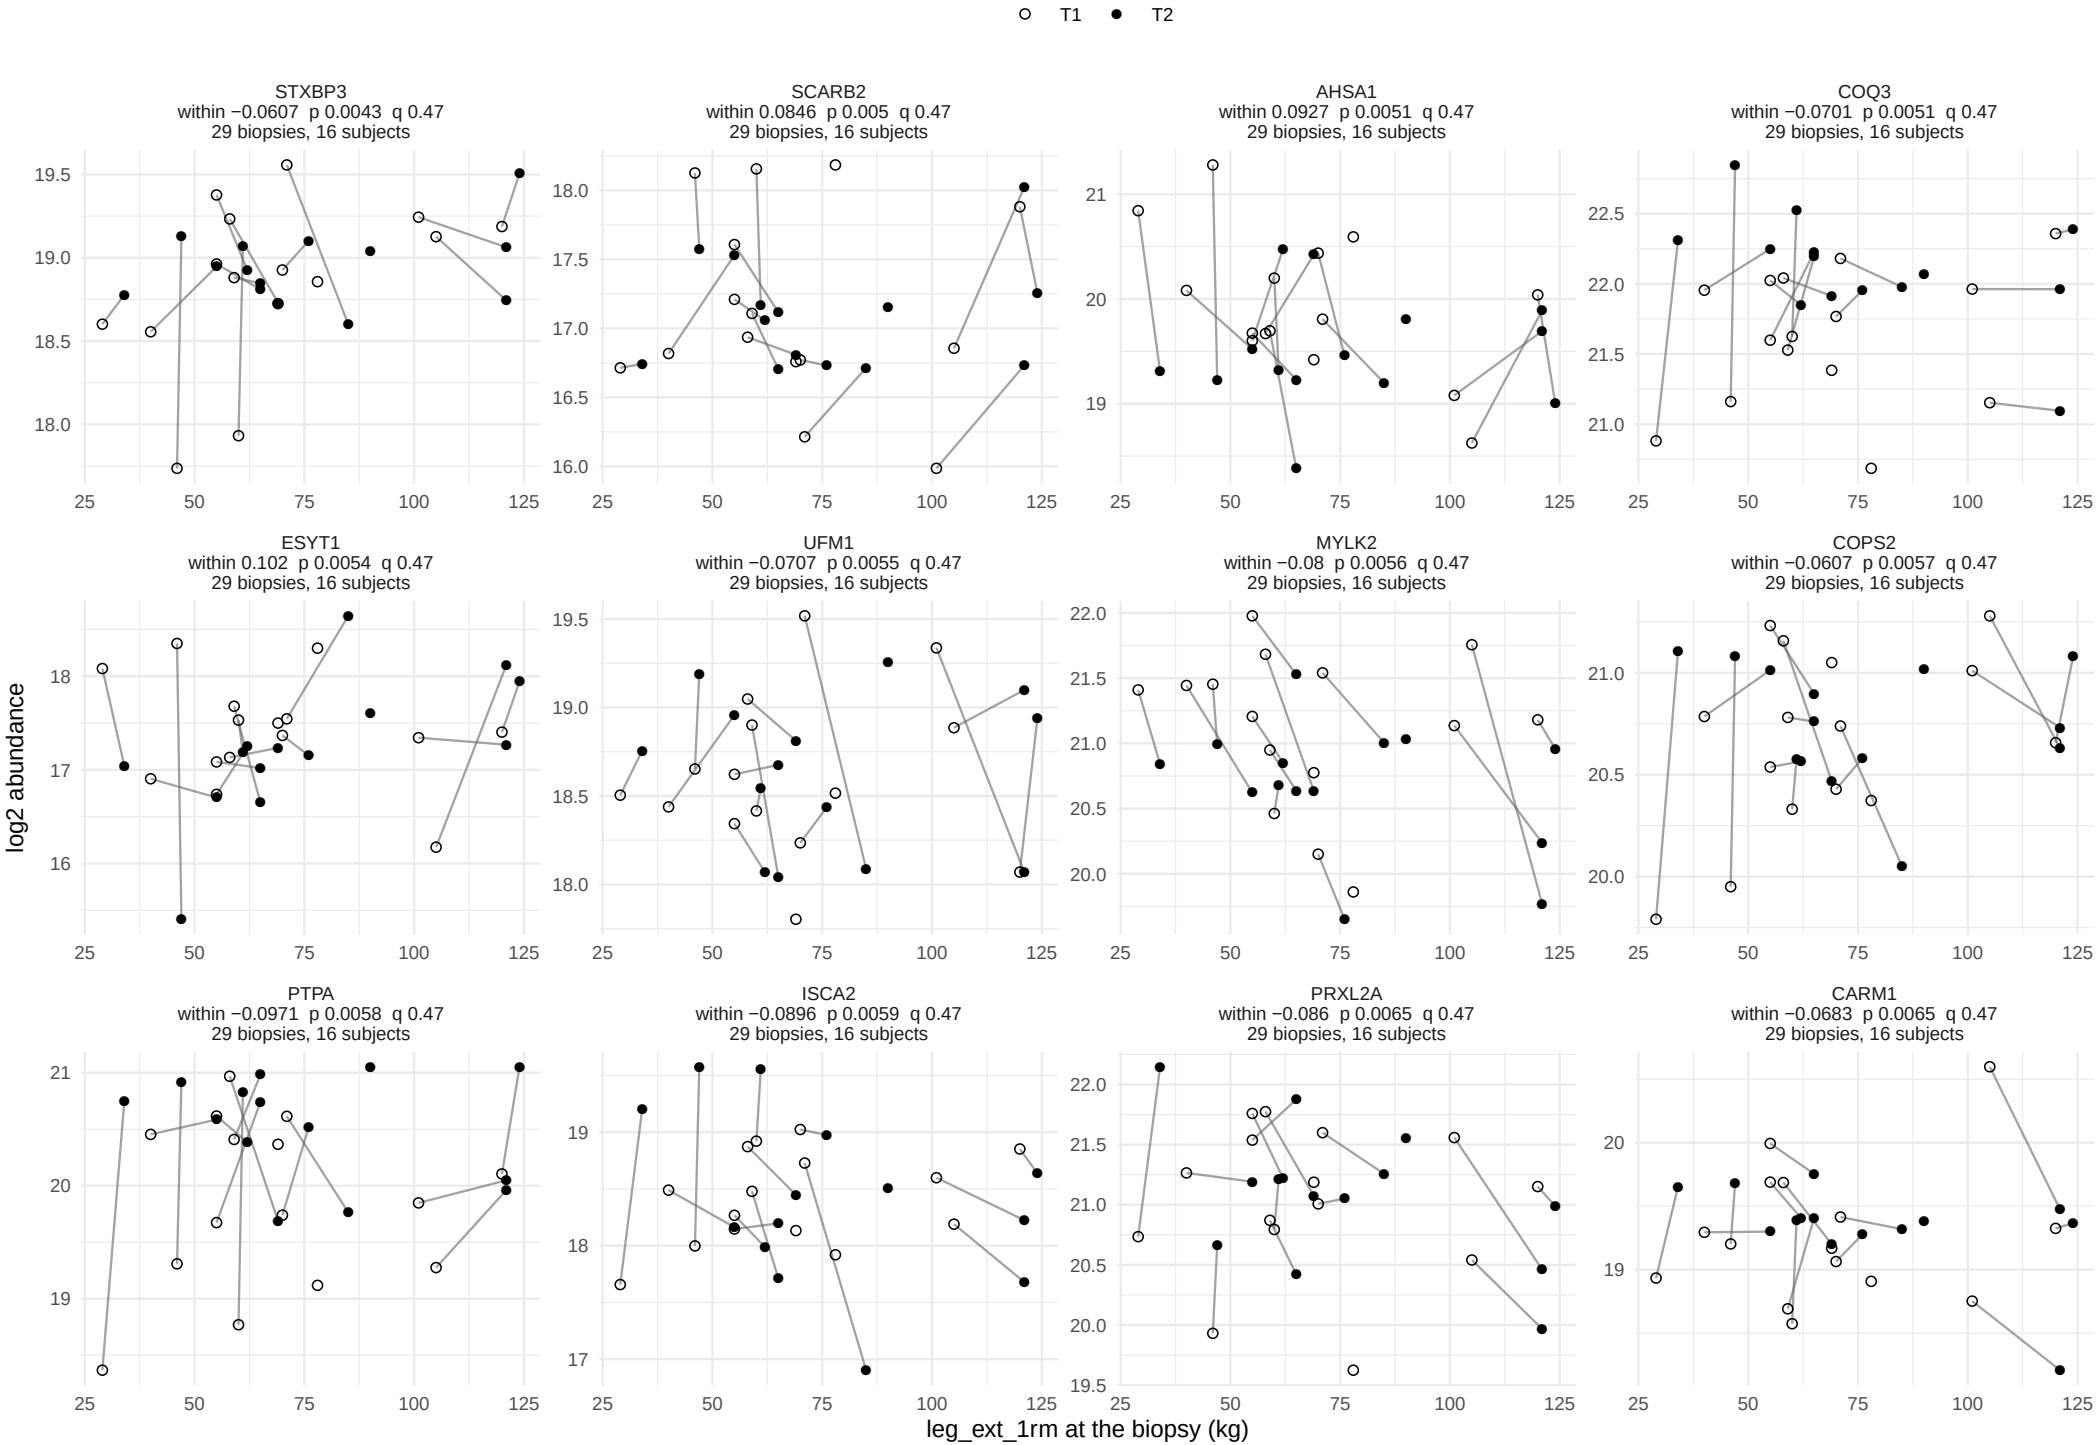

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

leg_ext_1rm, within−person term


134 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 3 of 12.

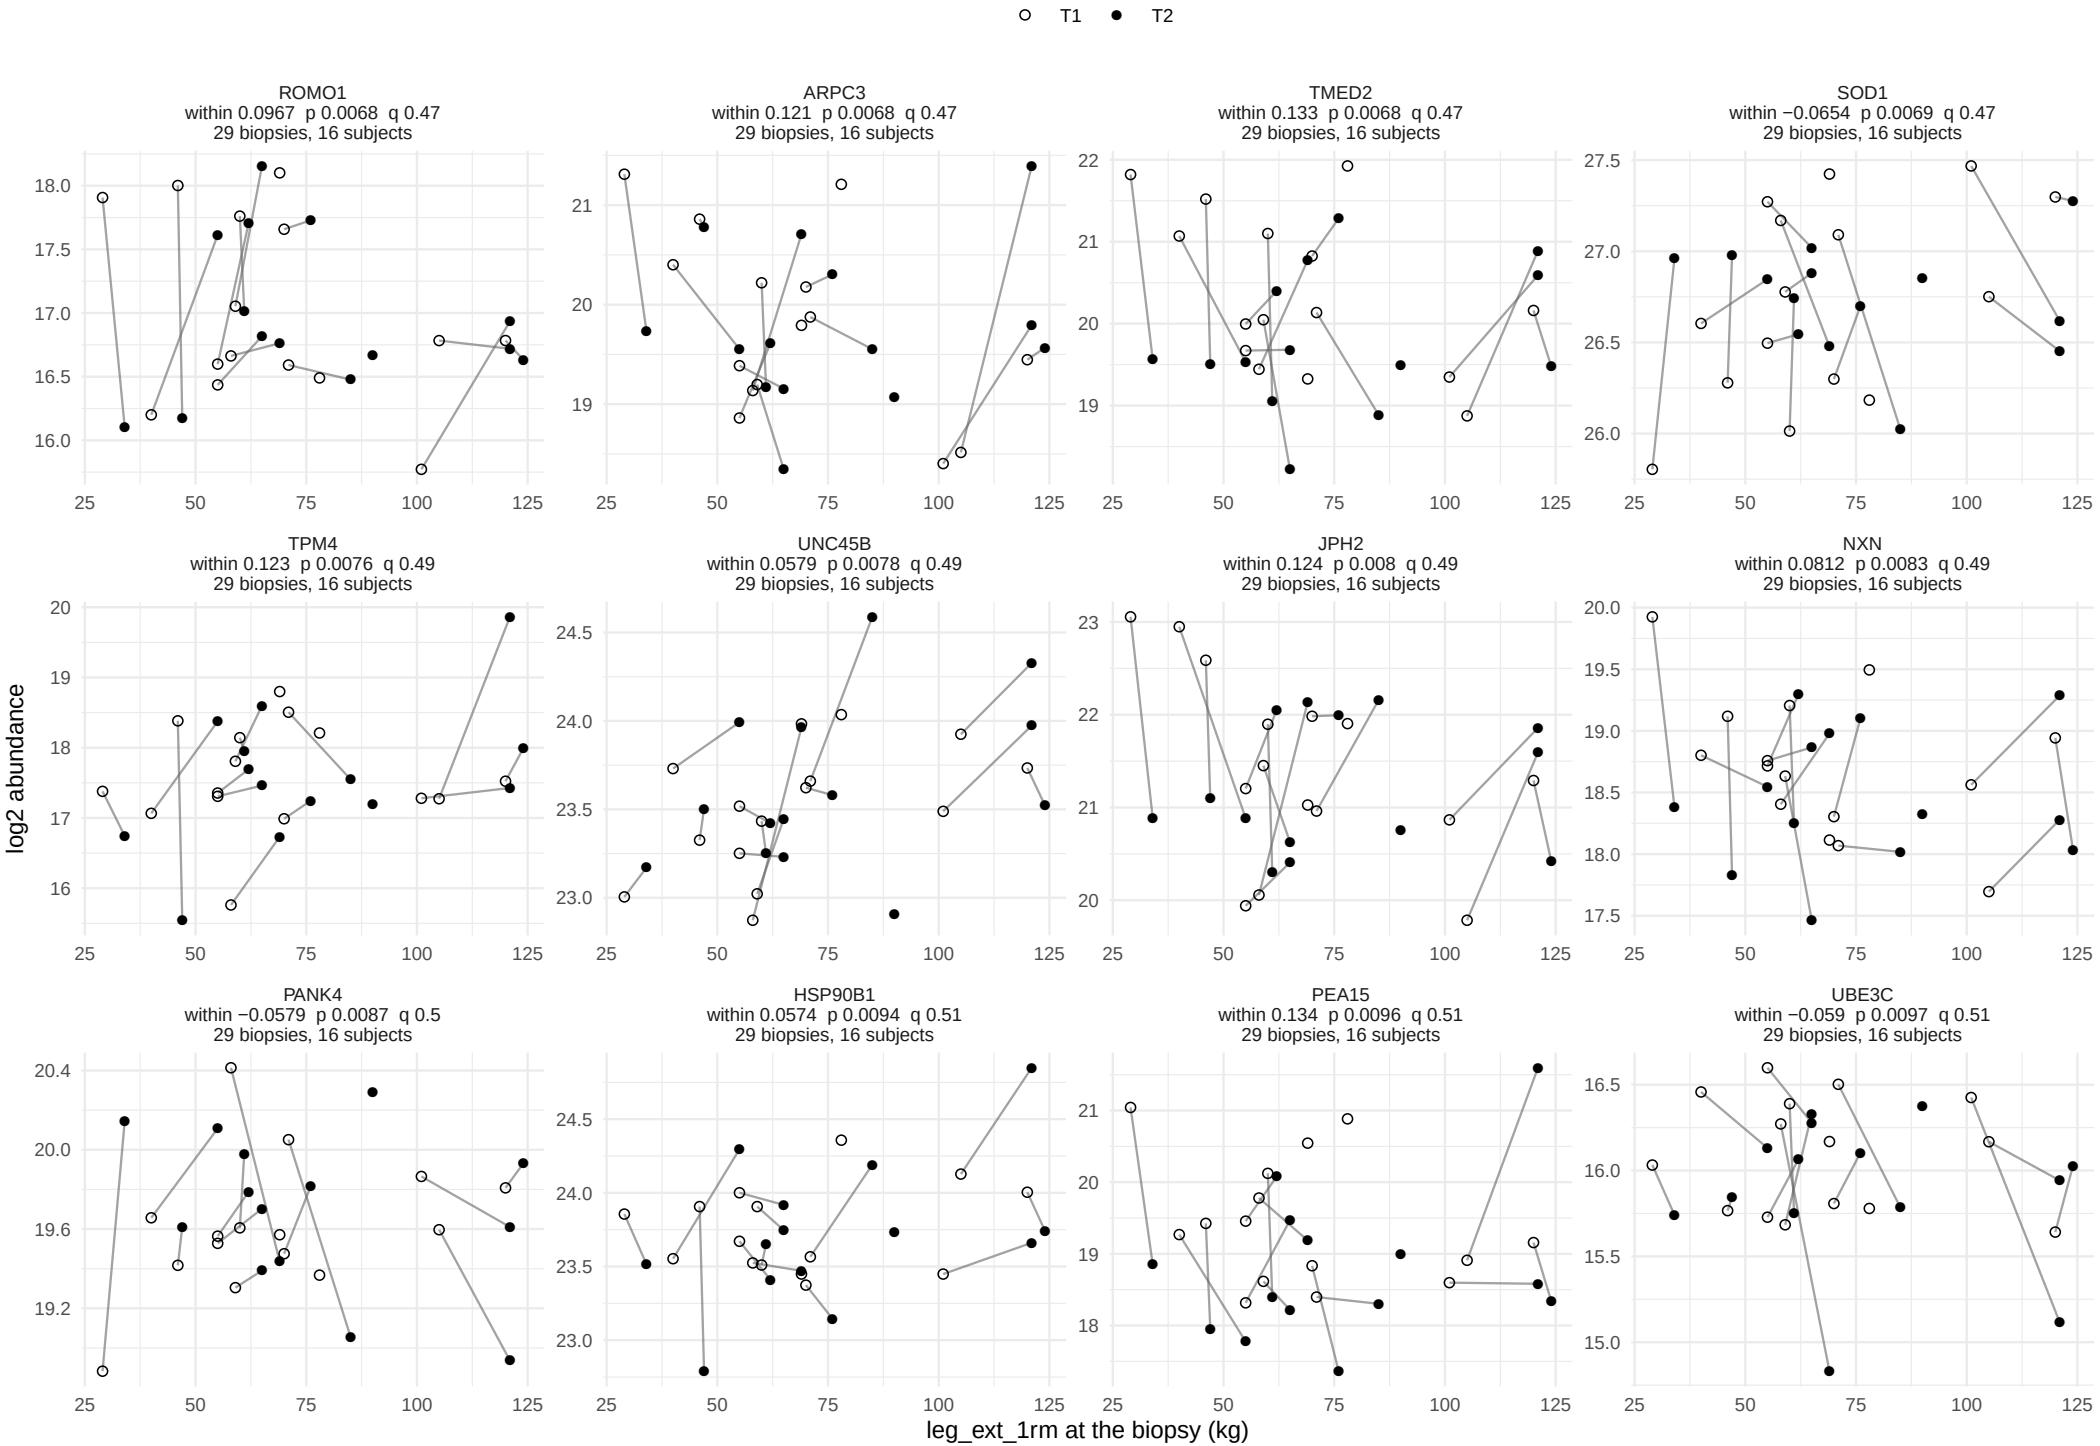

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

leg_ext_1rm, within−person term


134 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 4 of 12.

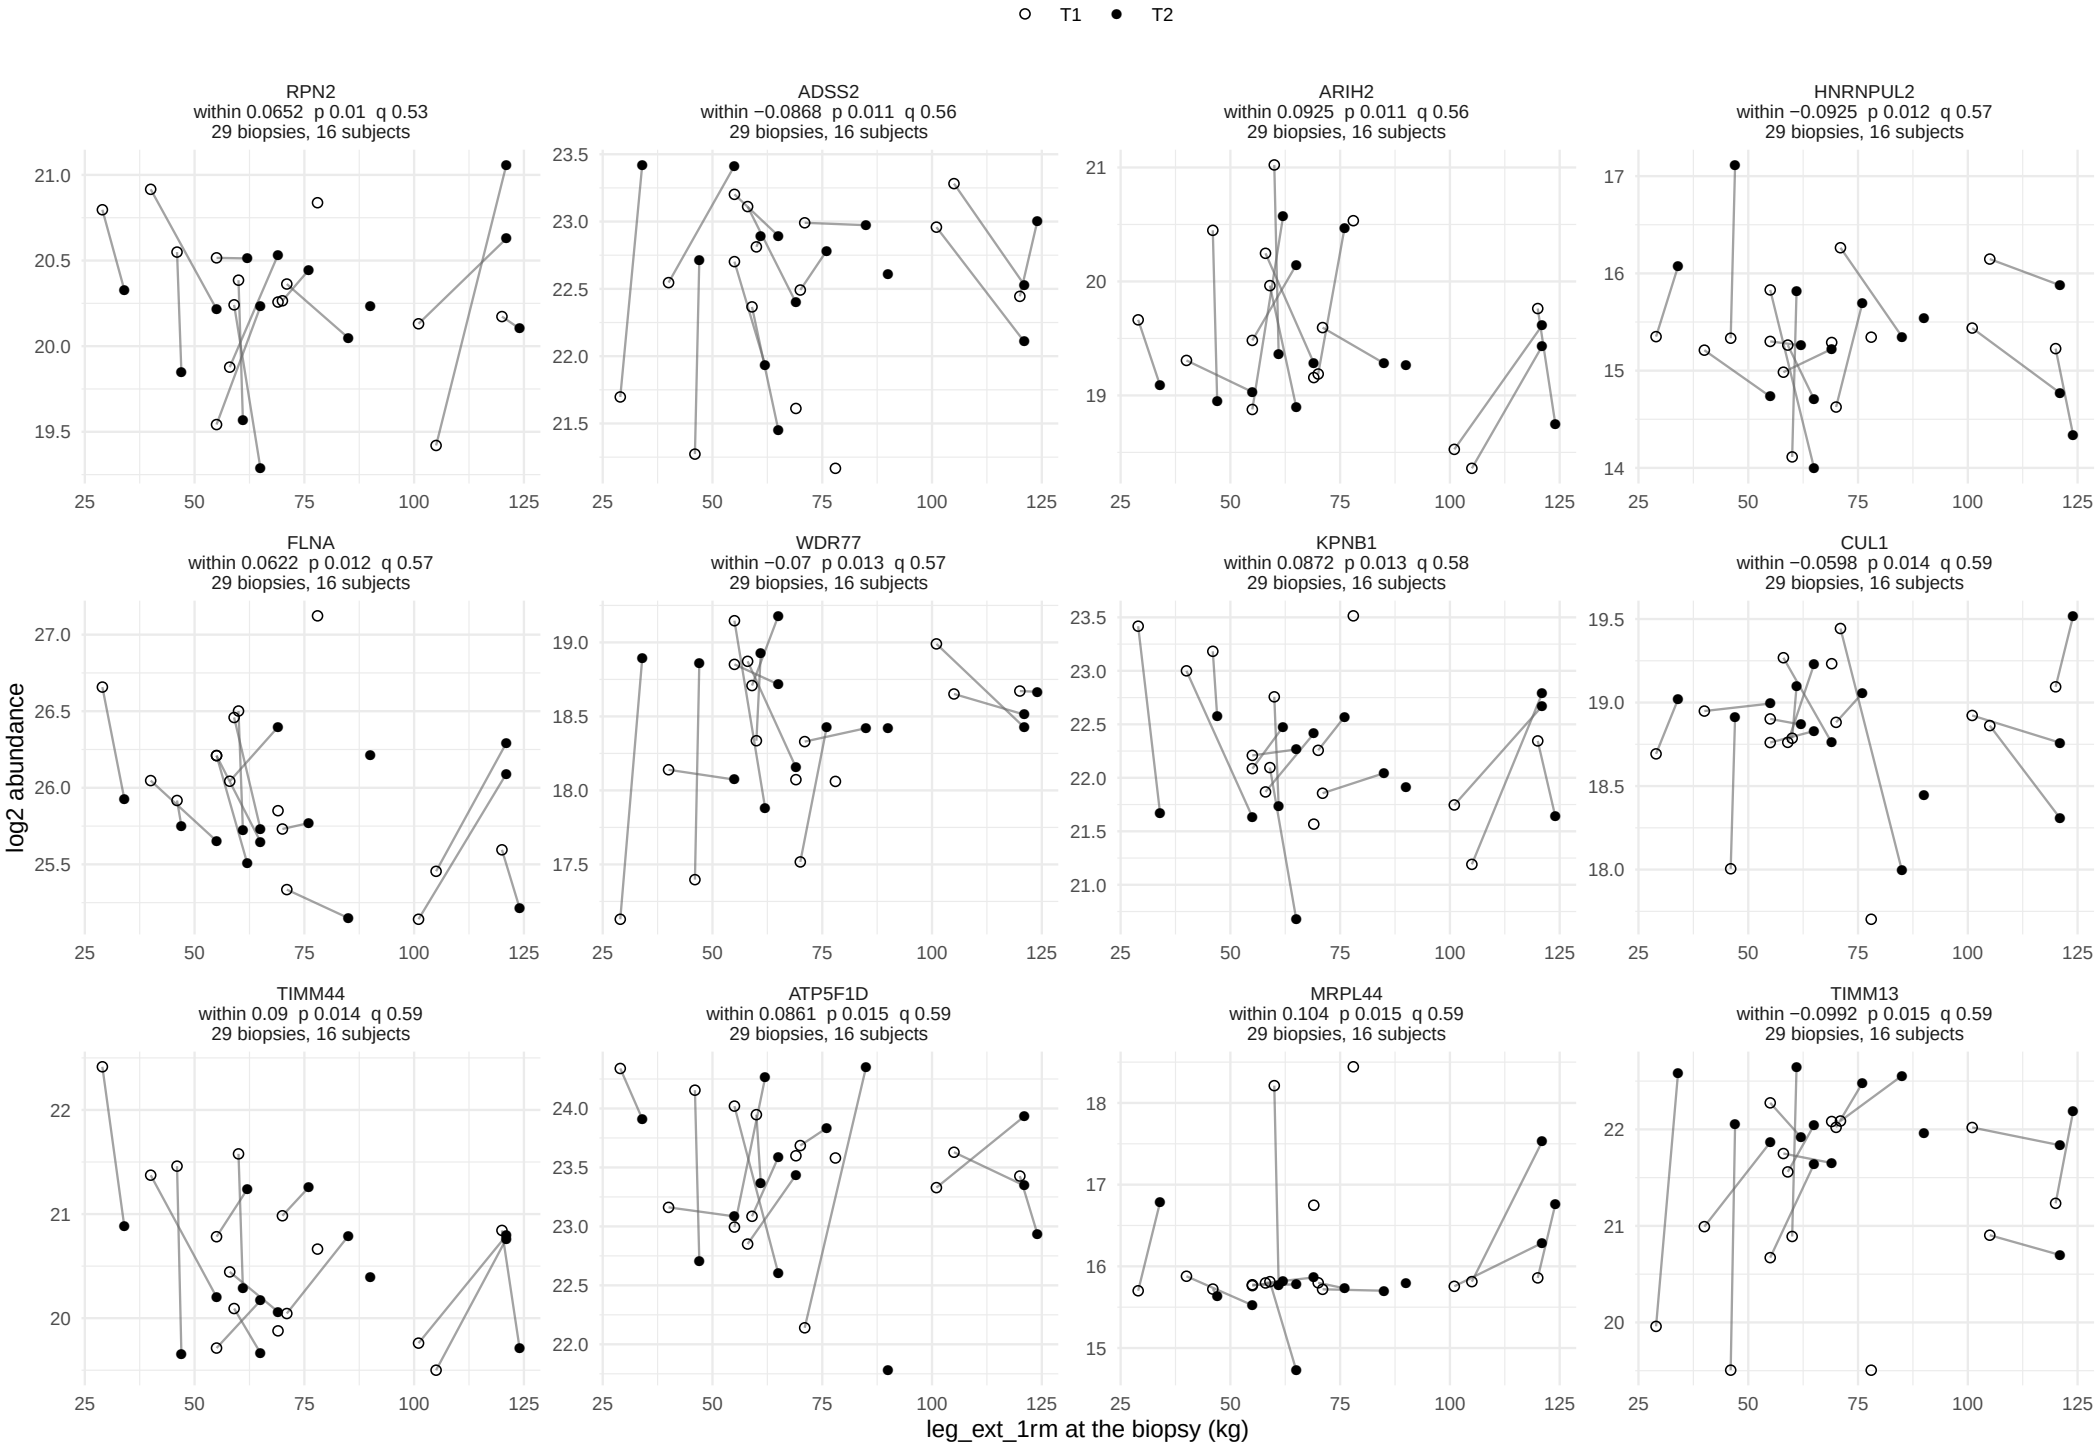

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

leg_ext_1rm, within−person term


134 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 5 of 12.

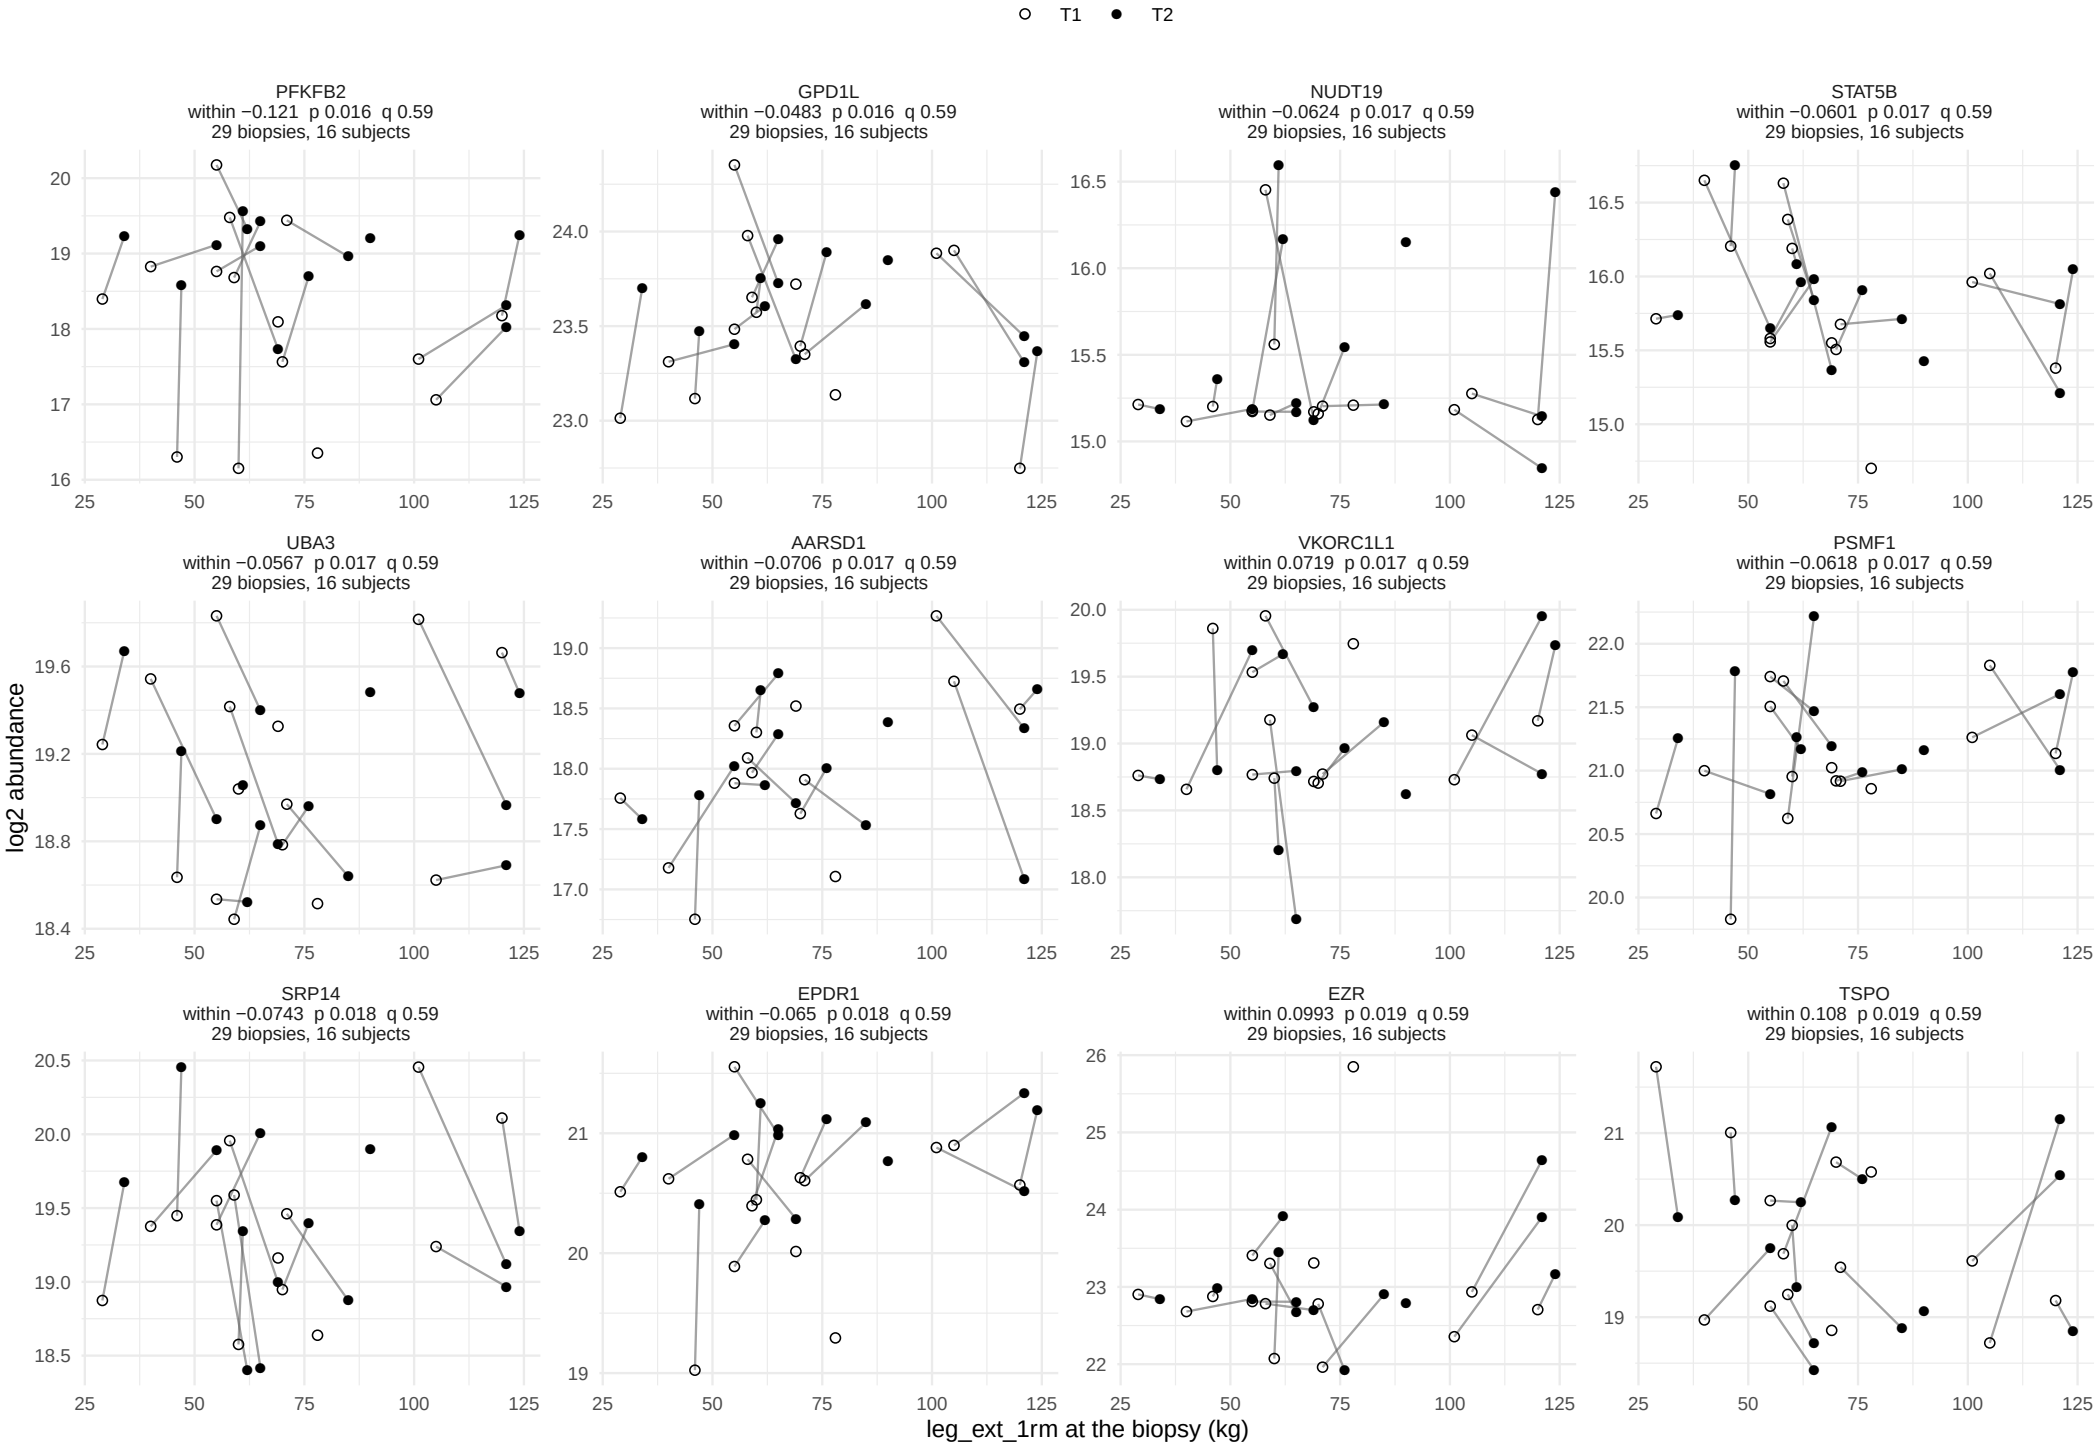

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

leg_ext_1rm, within−person term


134 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 6 of 12.

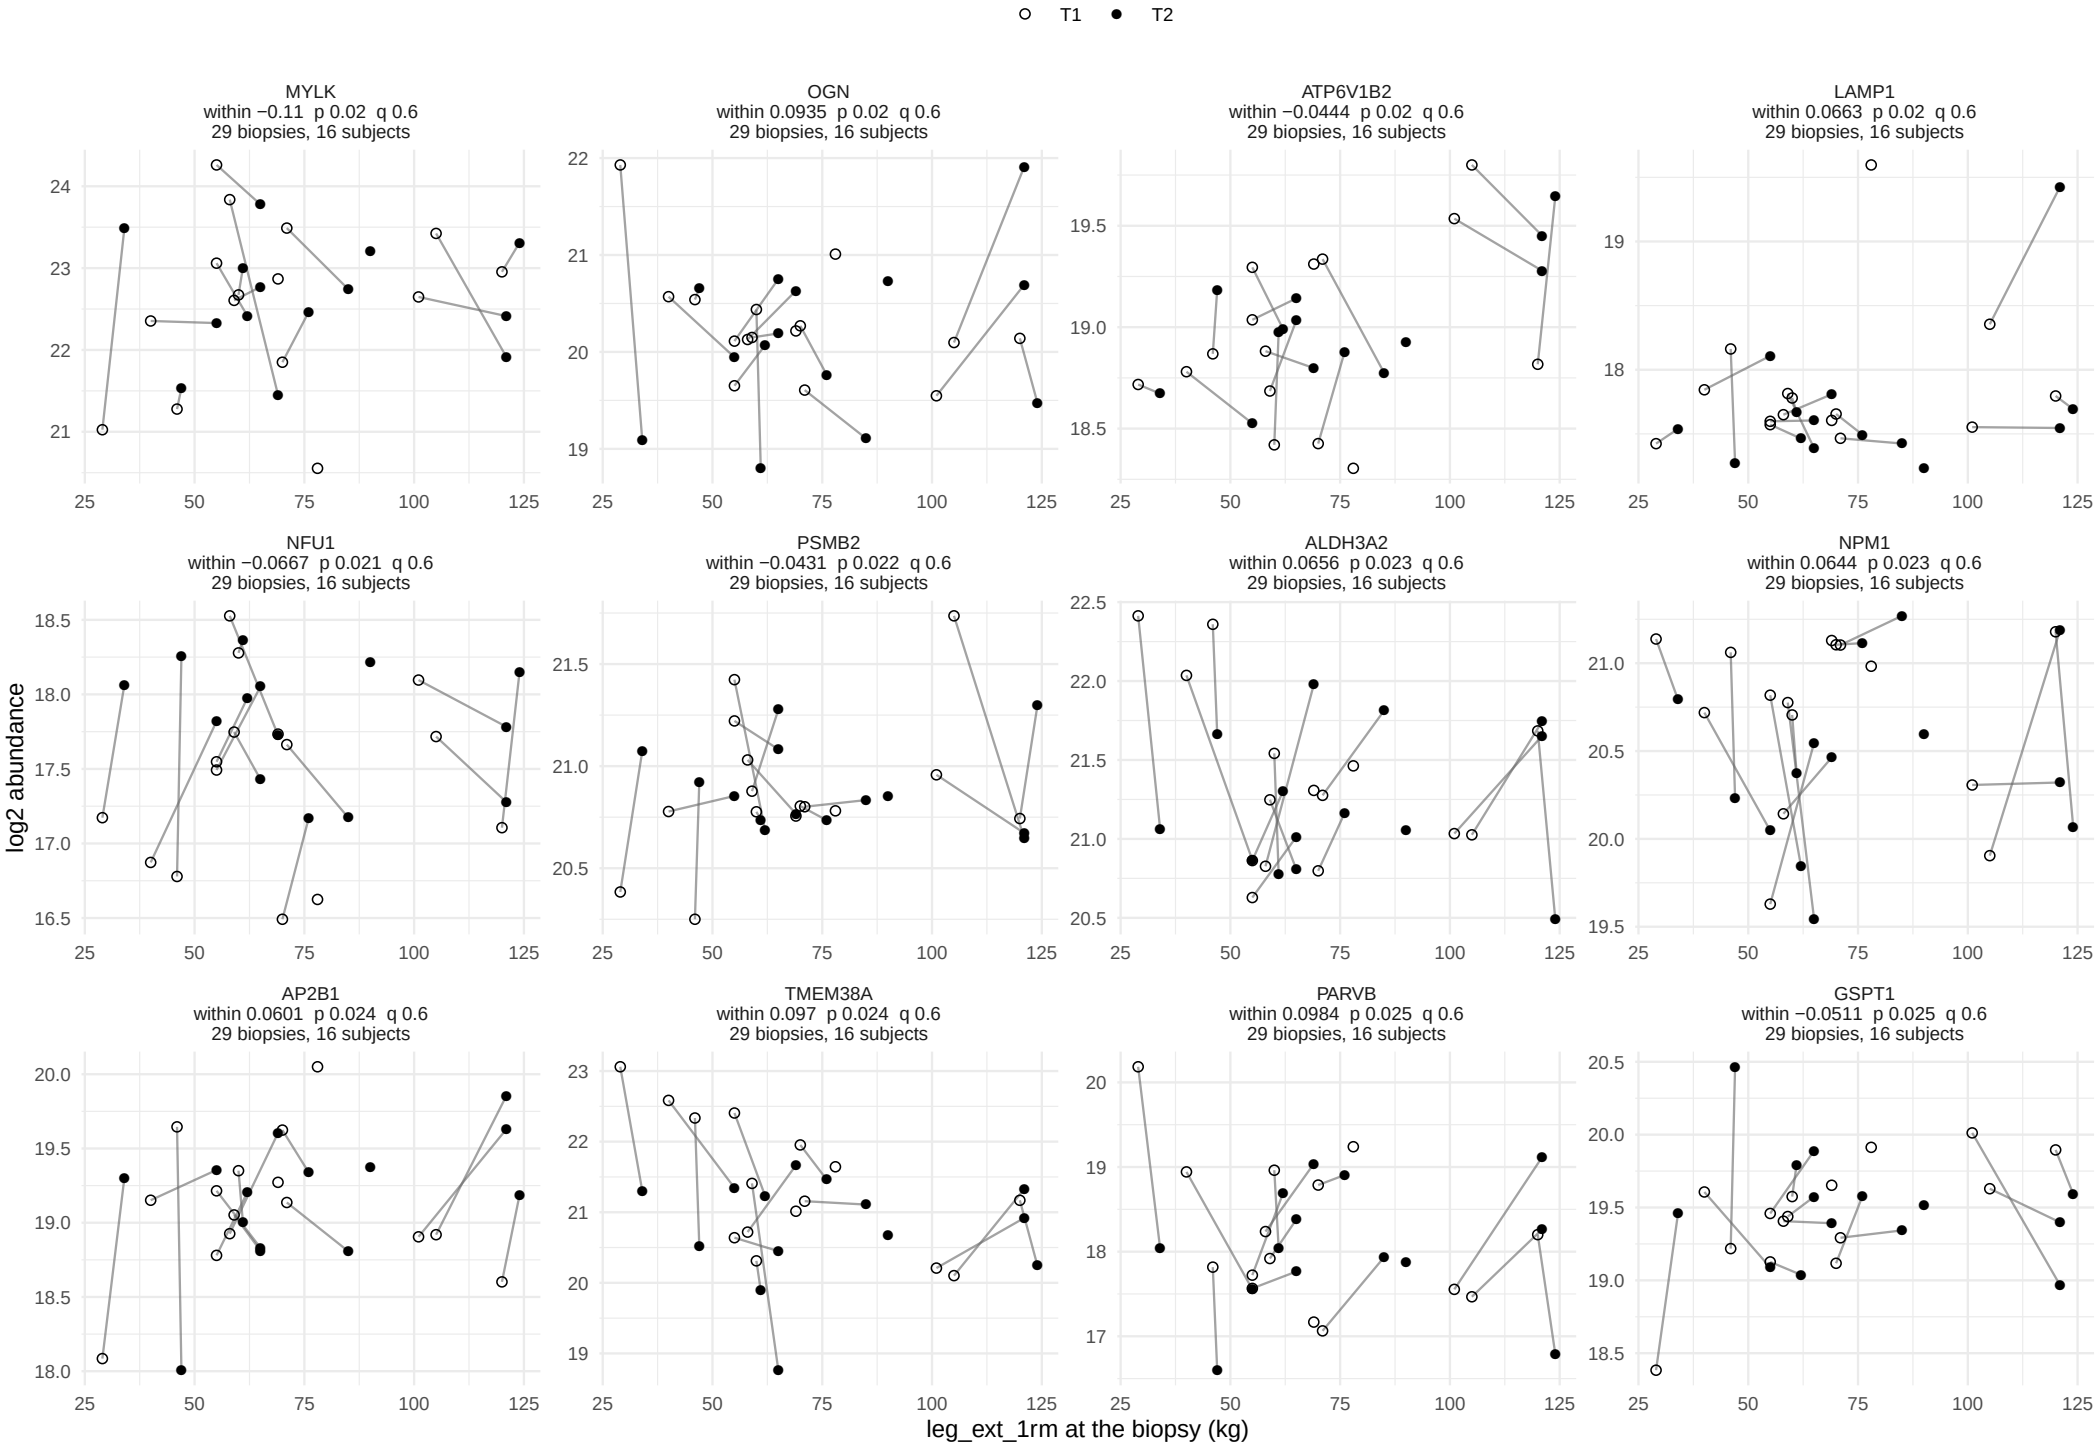

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

leg_ext_1rm, within−person term


134 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 7 of 12.

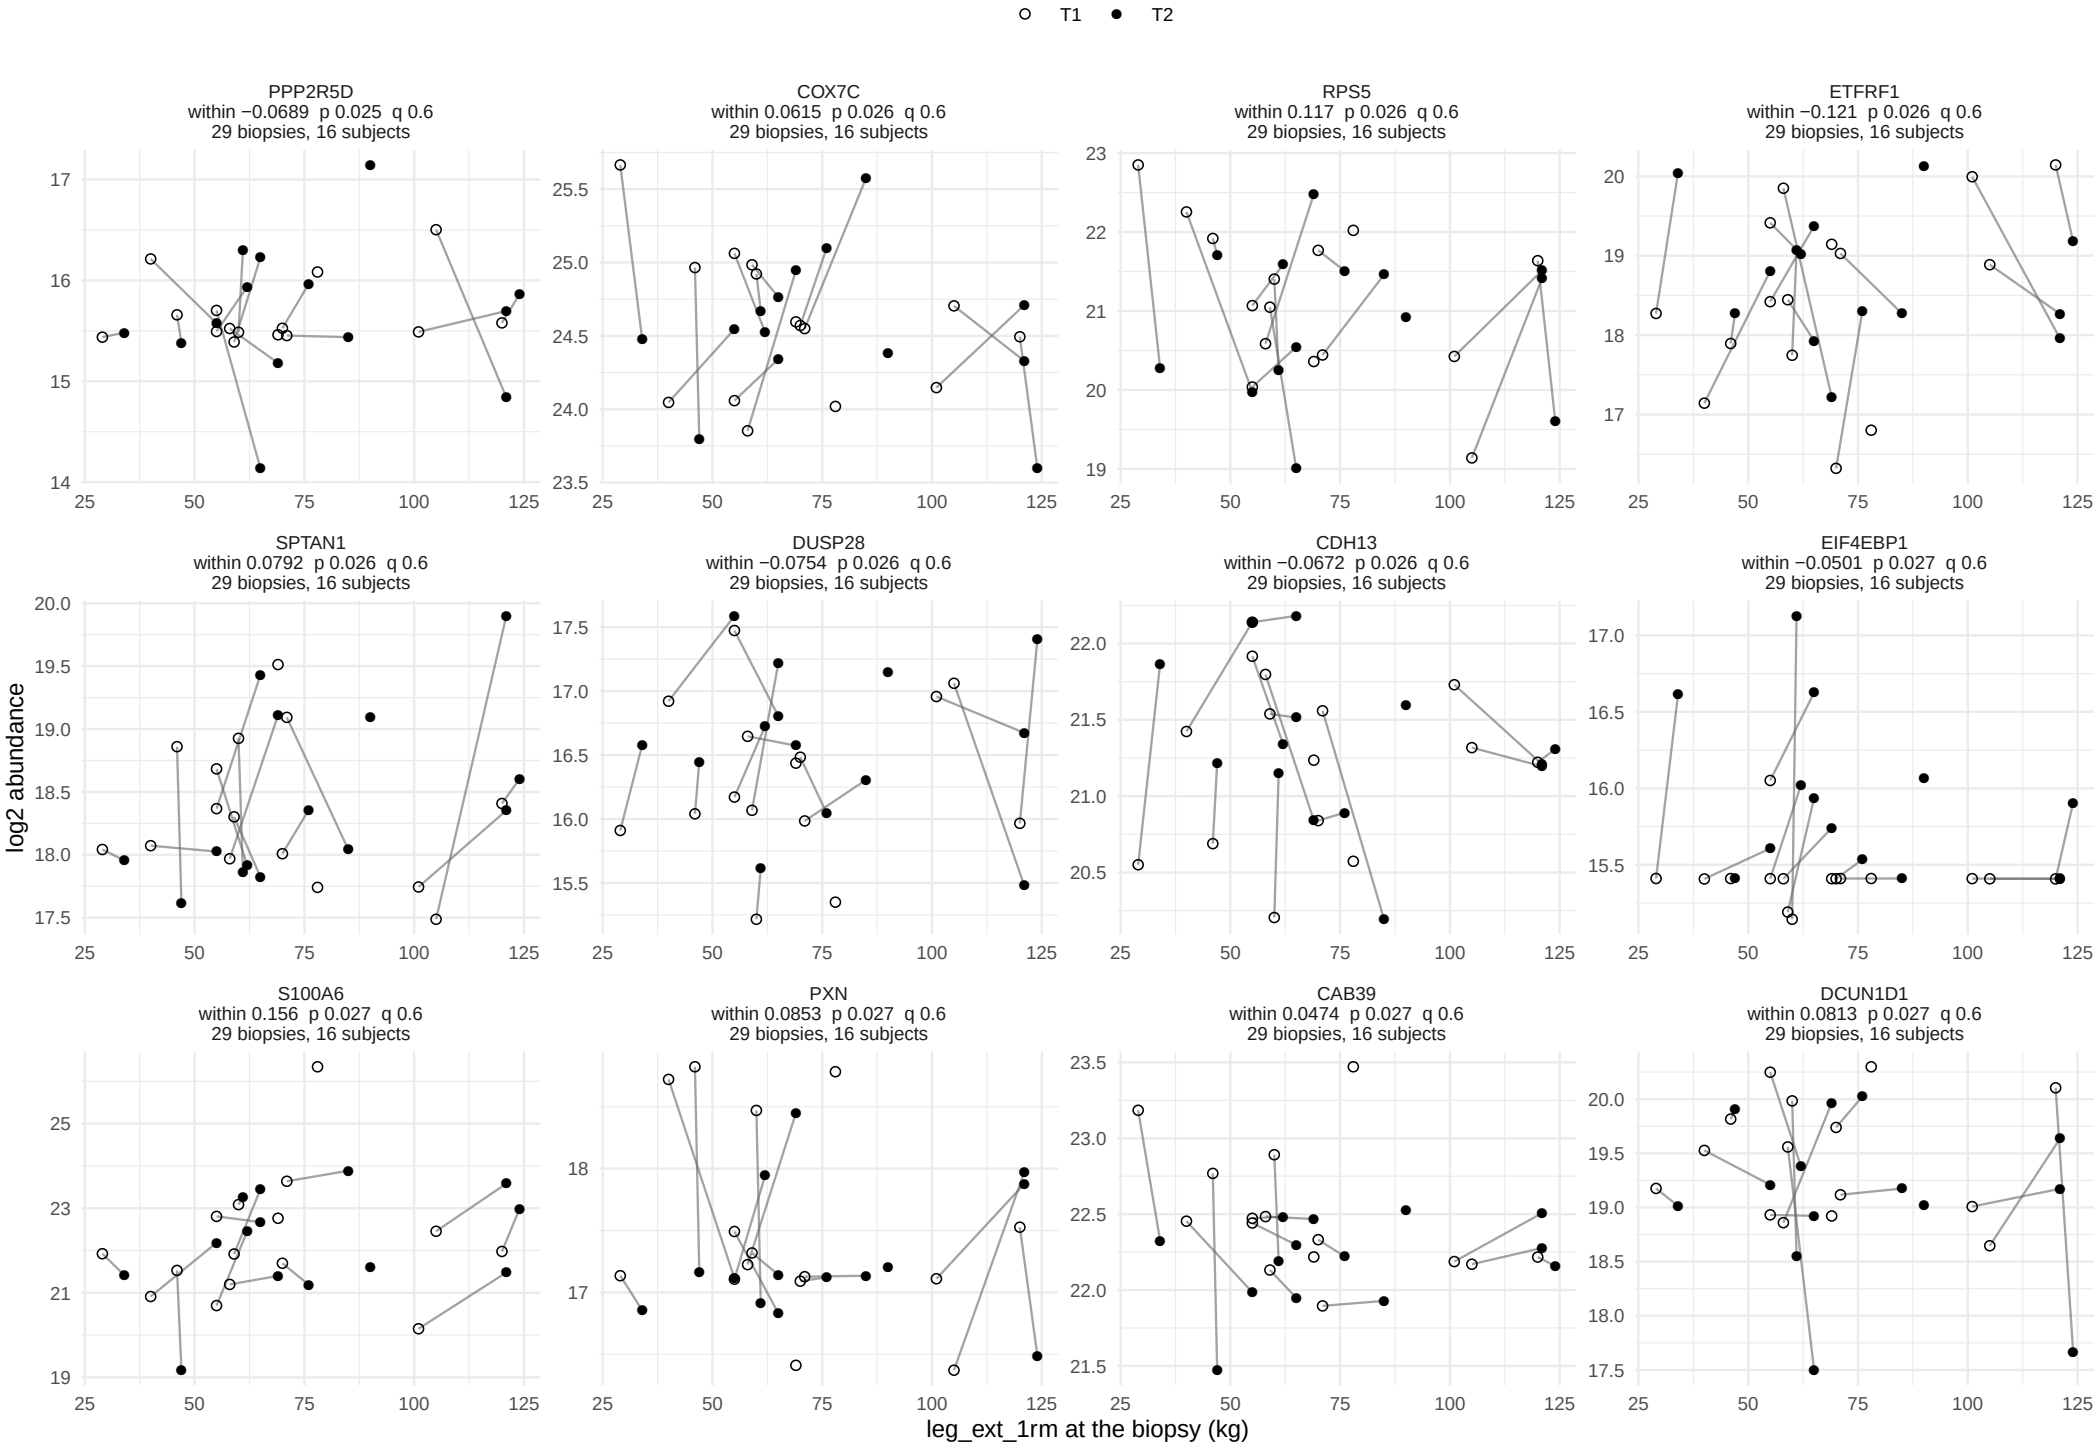

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

leg_ext_1rm, within−person term


134 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 8 of 12.

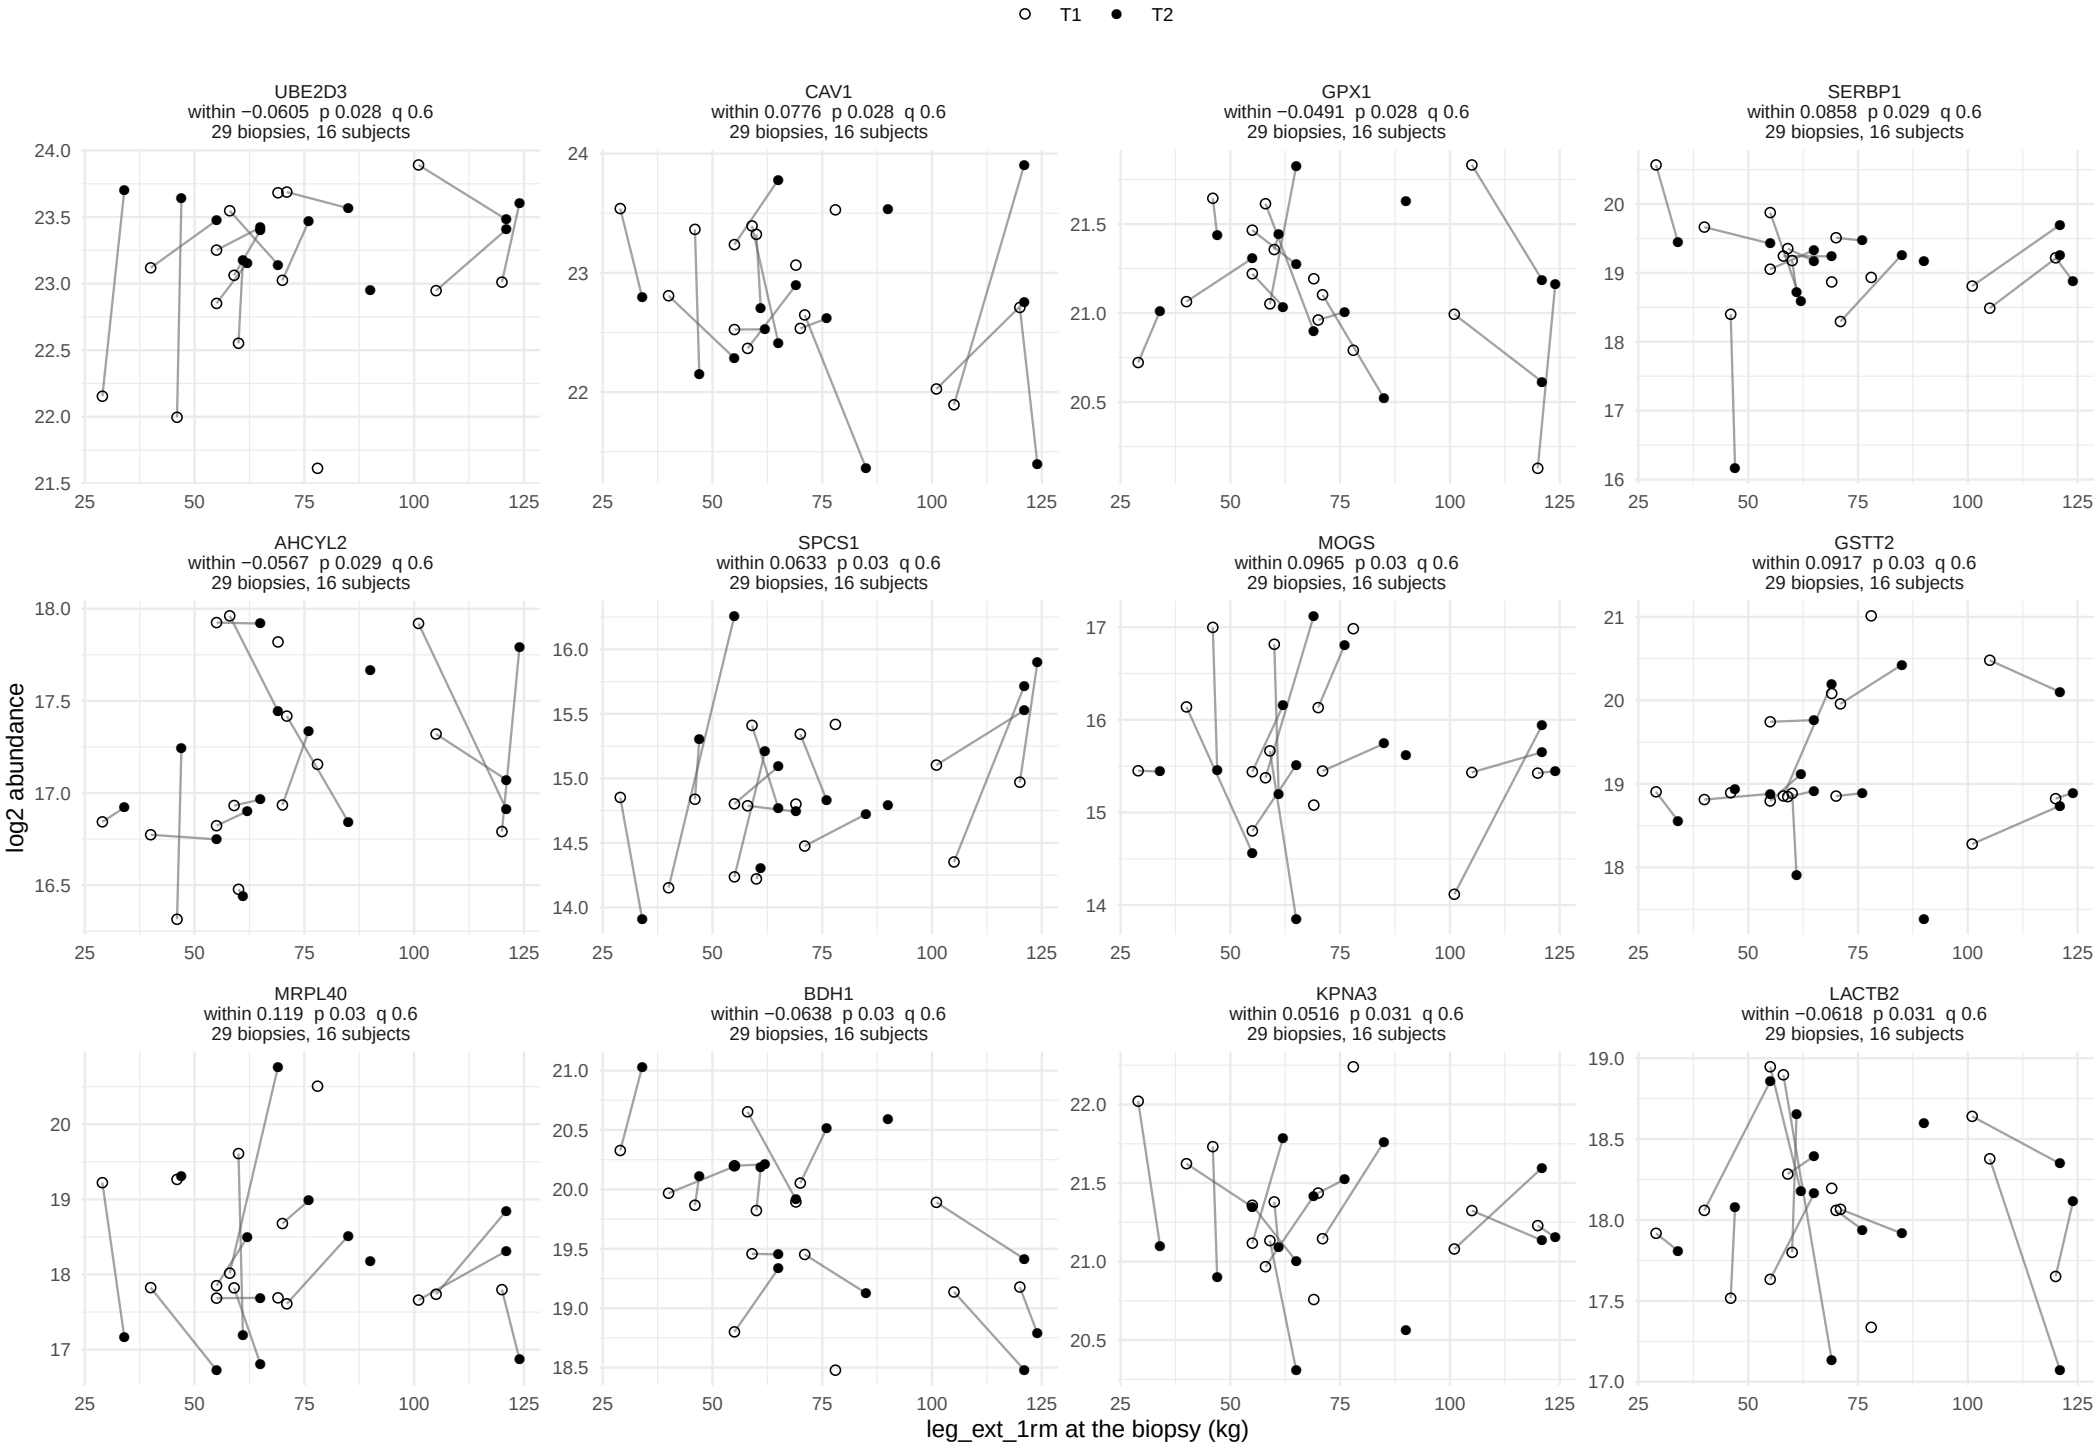

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

leg_ext_1rm, within−person term


134 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 9 of 12.

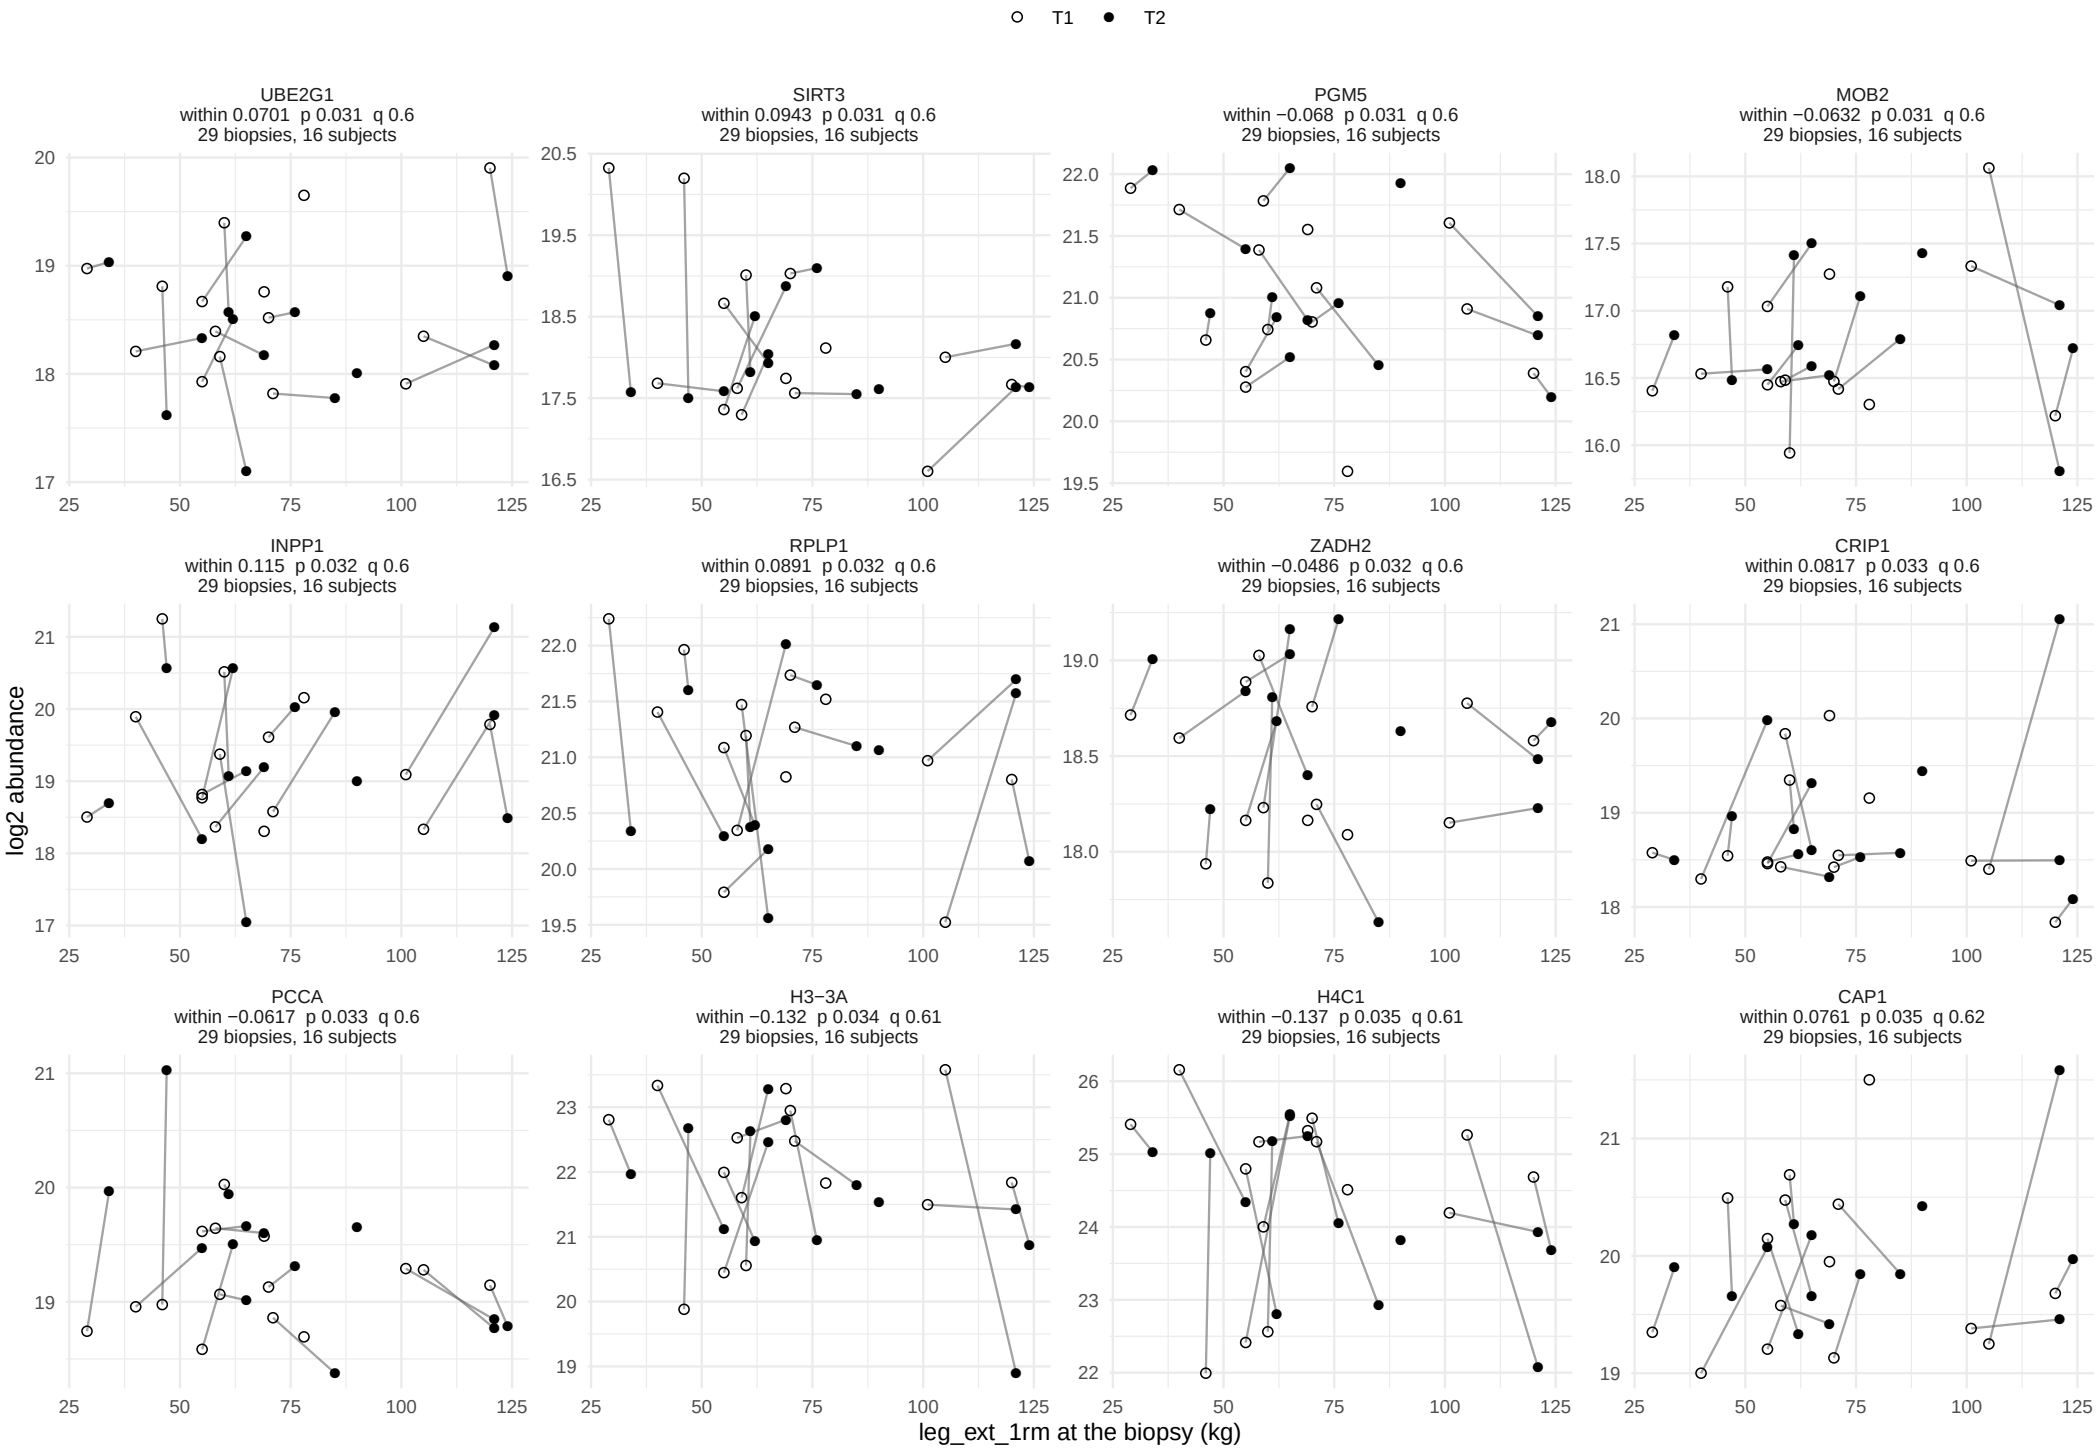

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

leg_ext_1rm, within−person term


134 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 10 of 12.

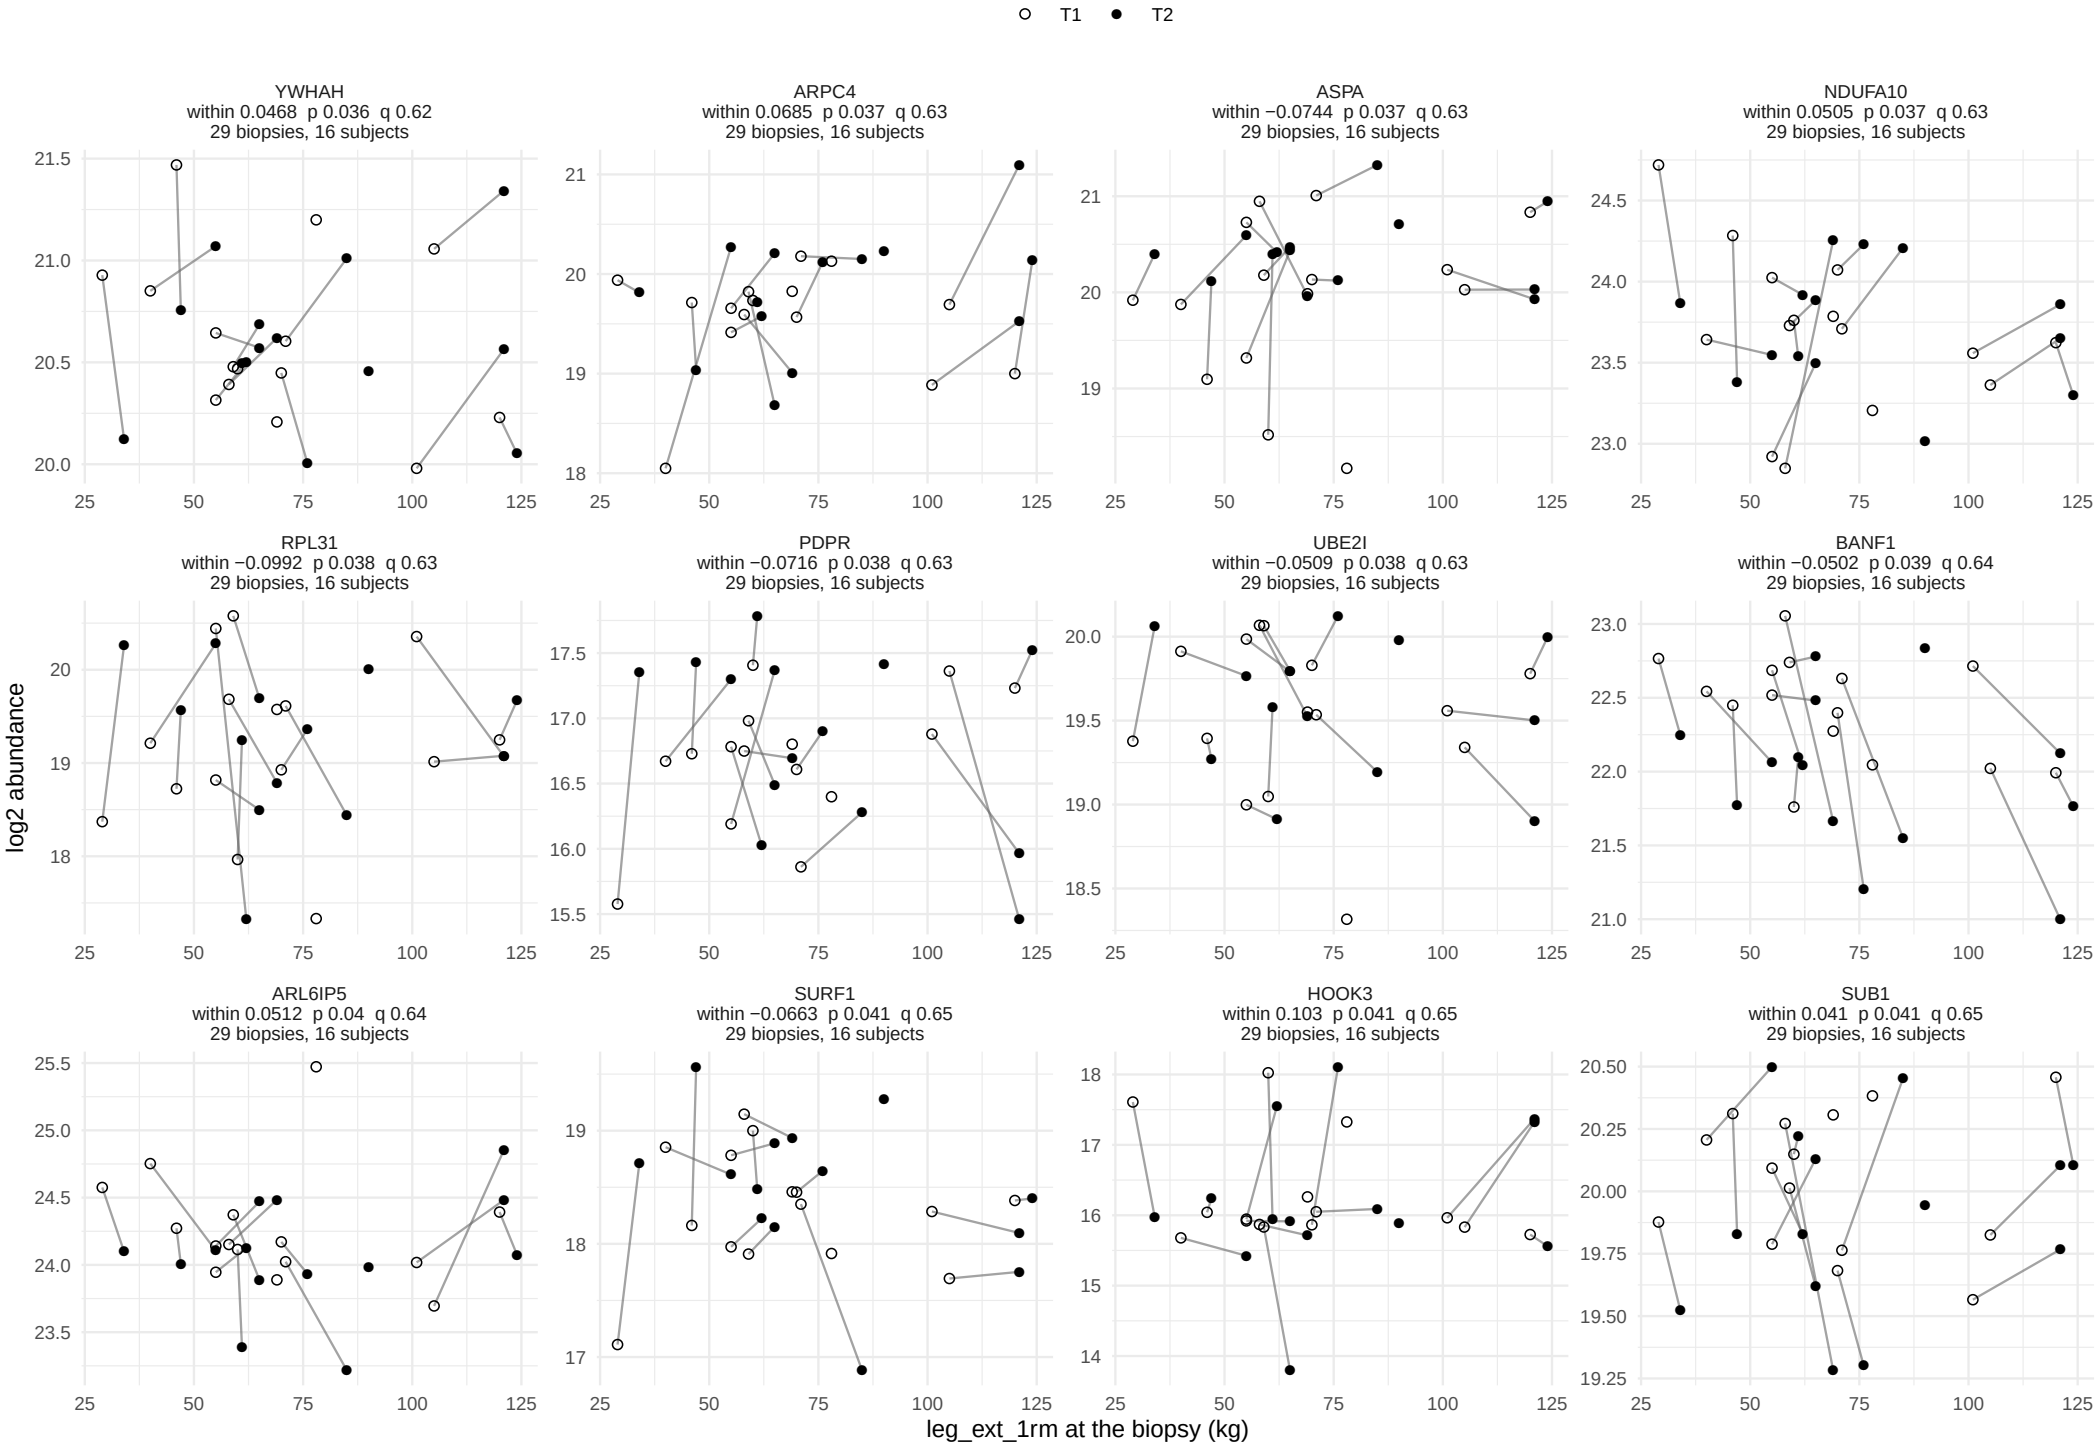

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

leg_ext_1rm, within−person term


134 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 11 of 12.

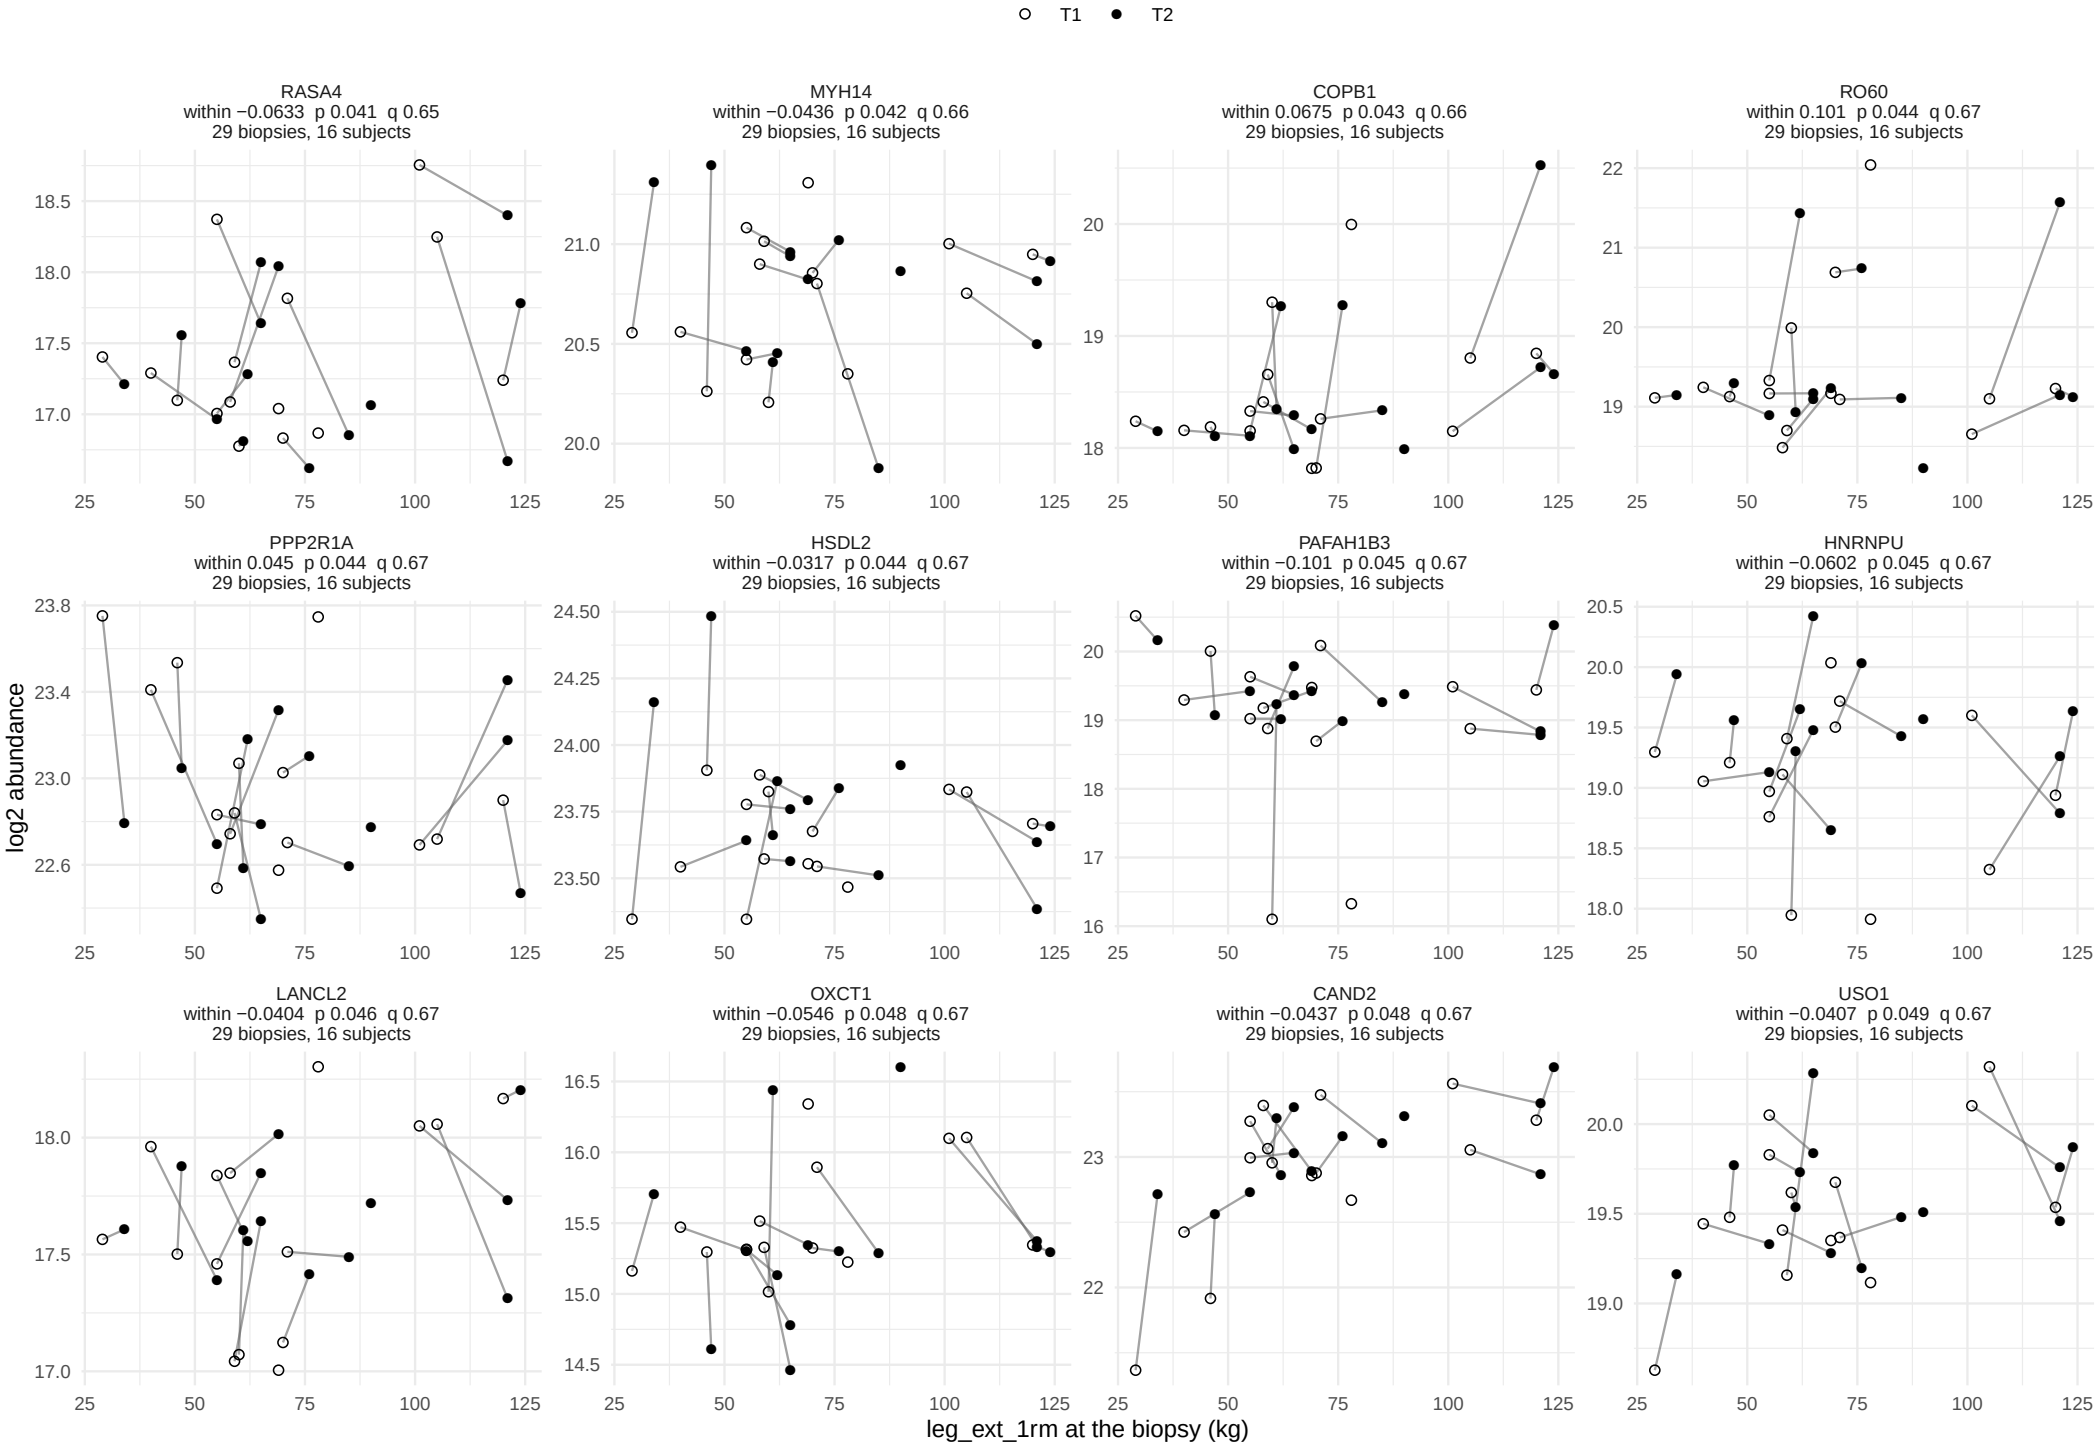

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

leg_ext_1rm, within−person term


134 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 12 of 12.

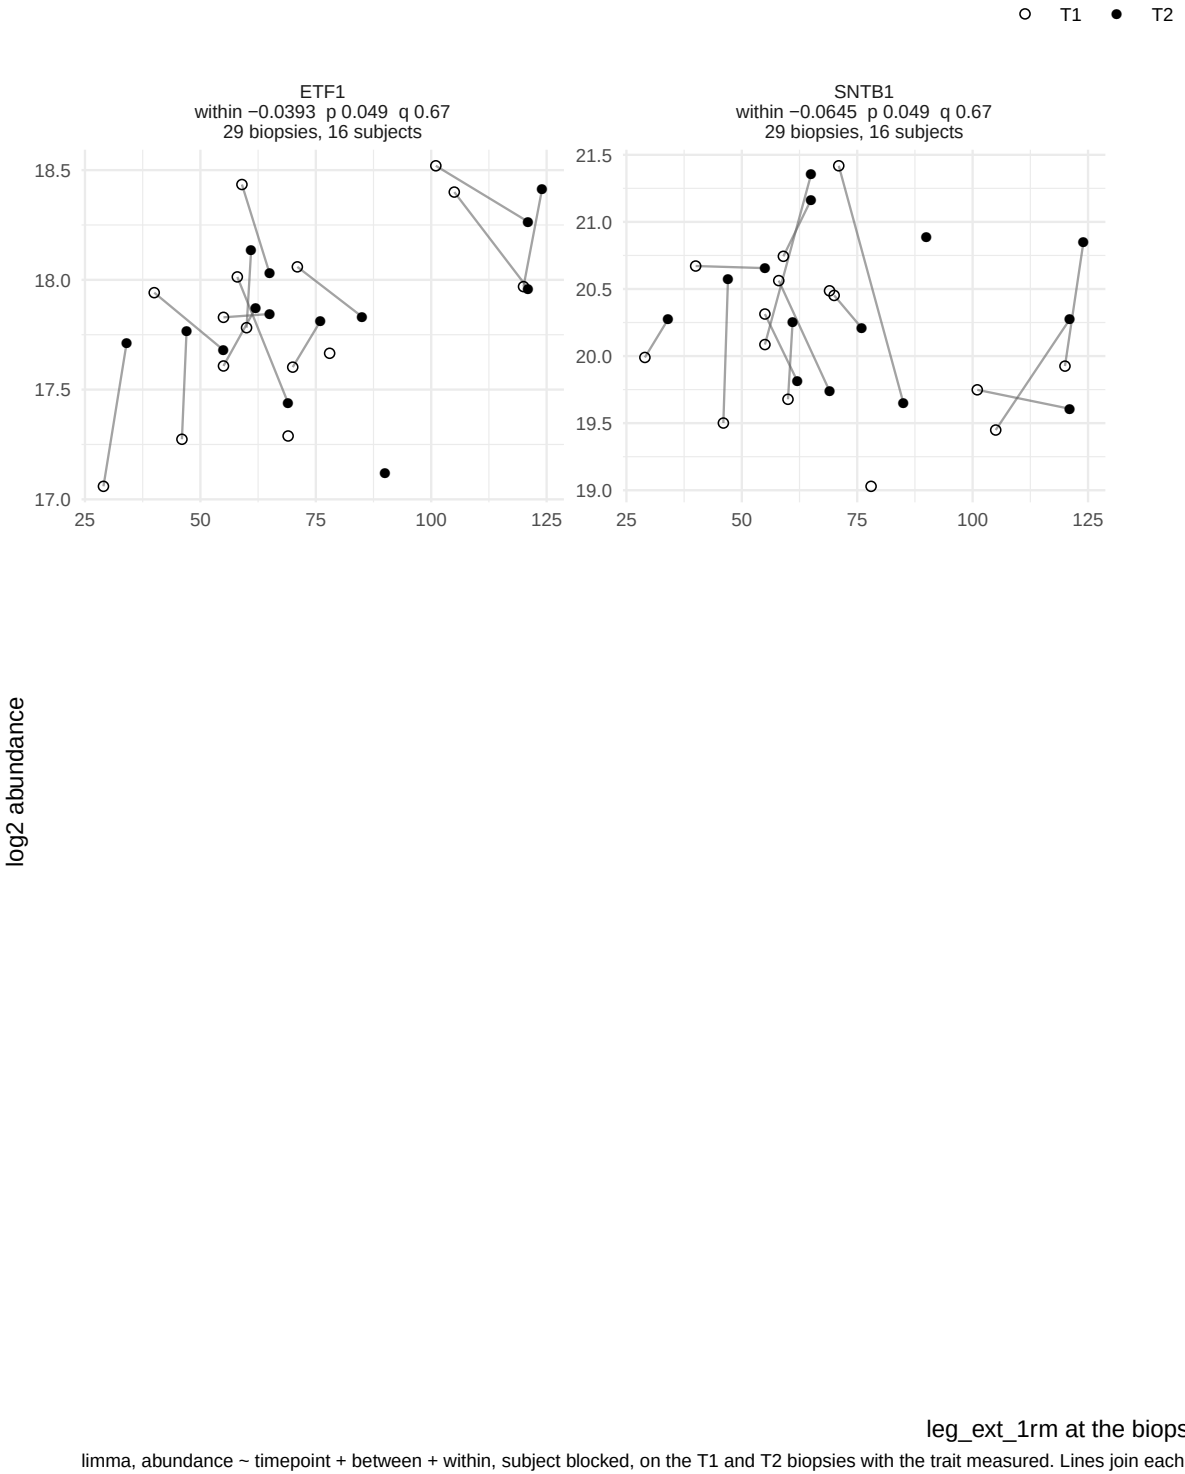

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

leg_ext_1rm, between−person term


130 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 1 of 11.

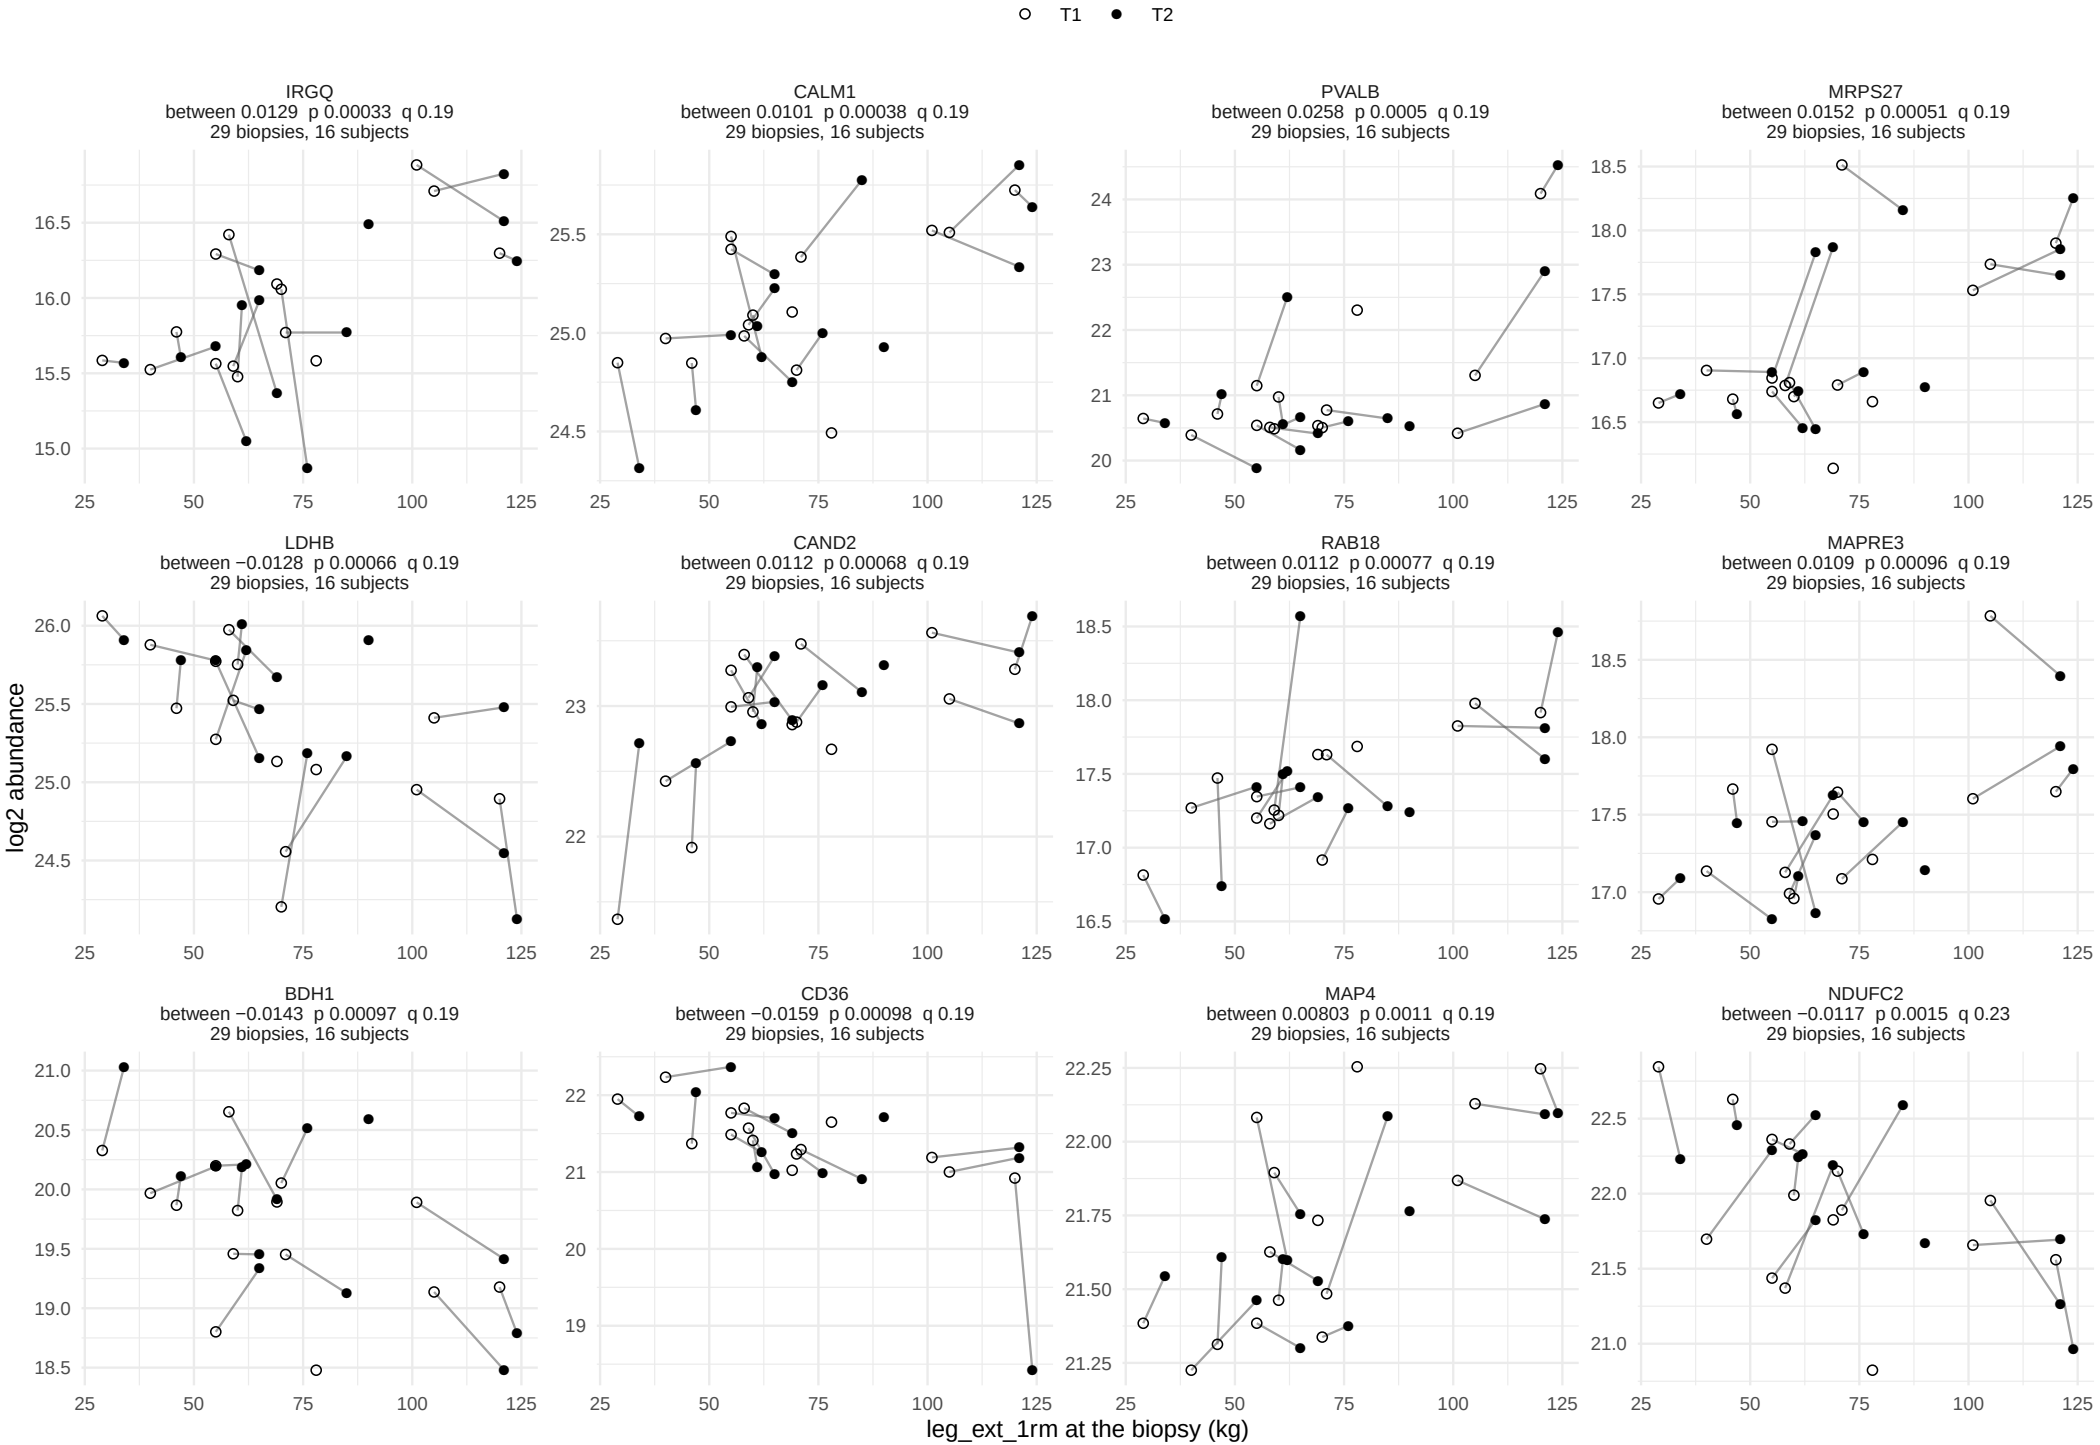

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

leg_ext_1rm, between−person term


130 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 2 of 11.

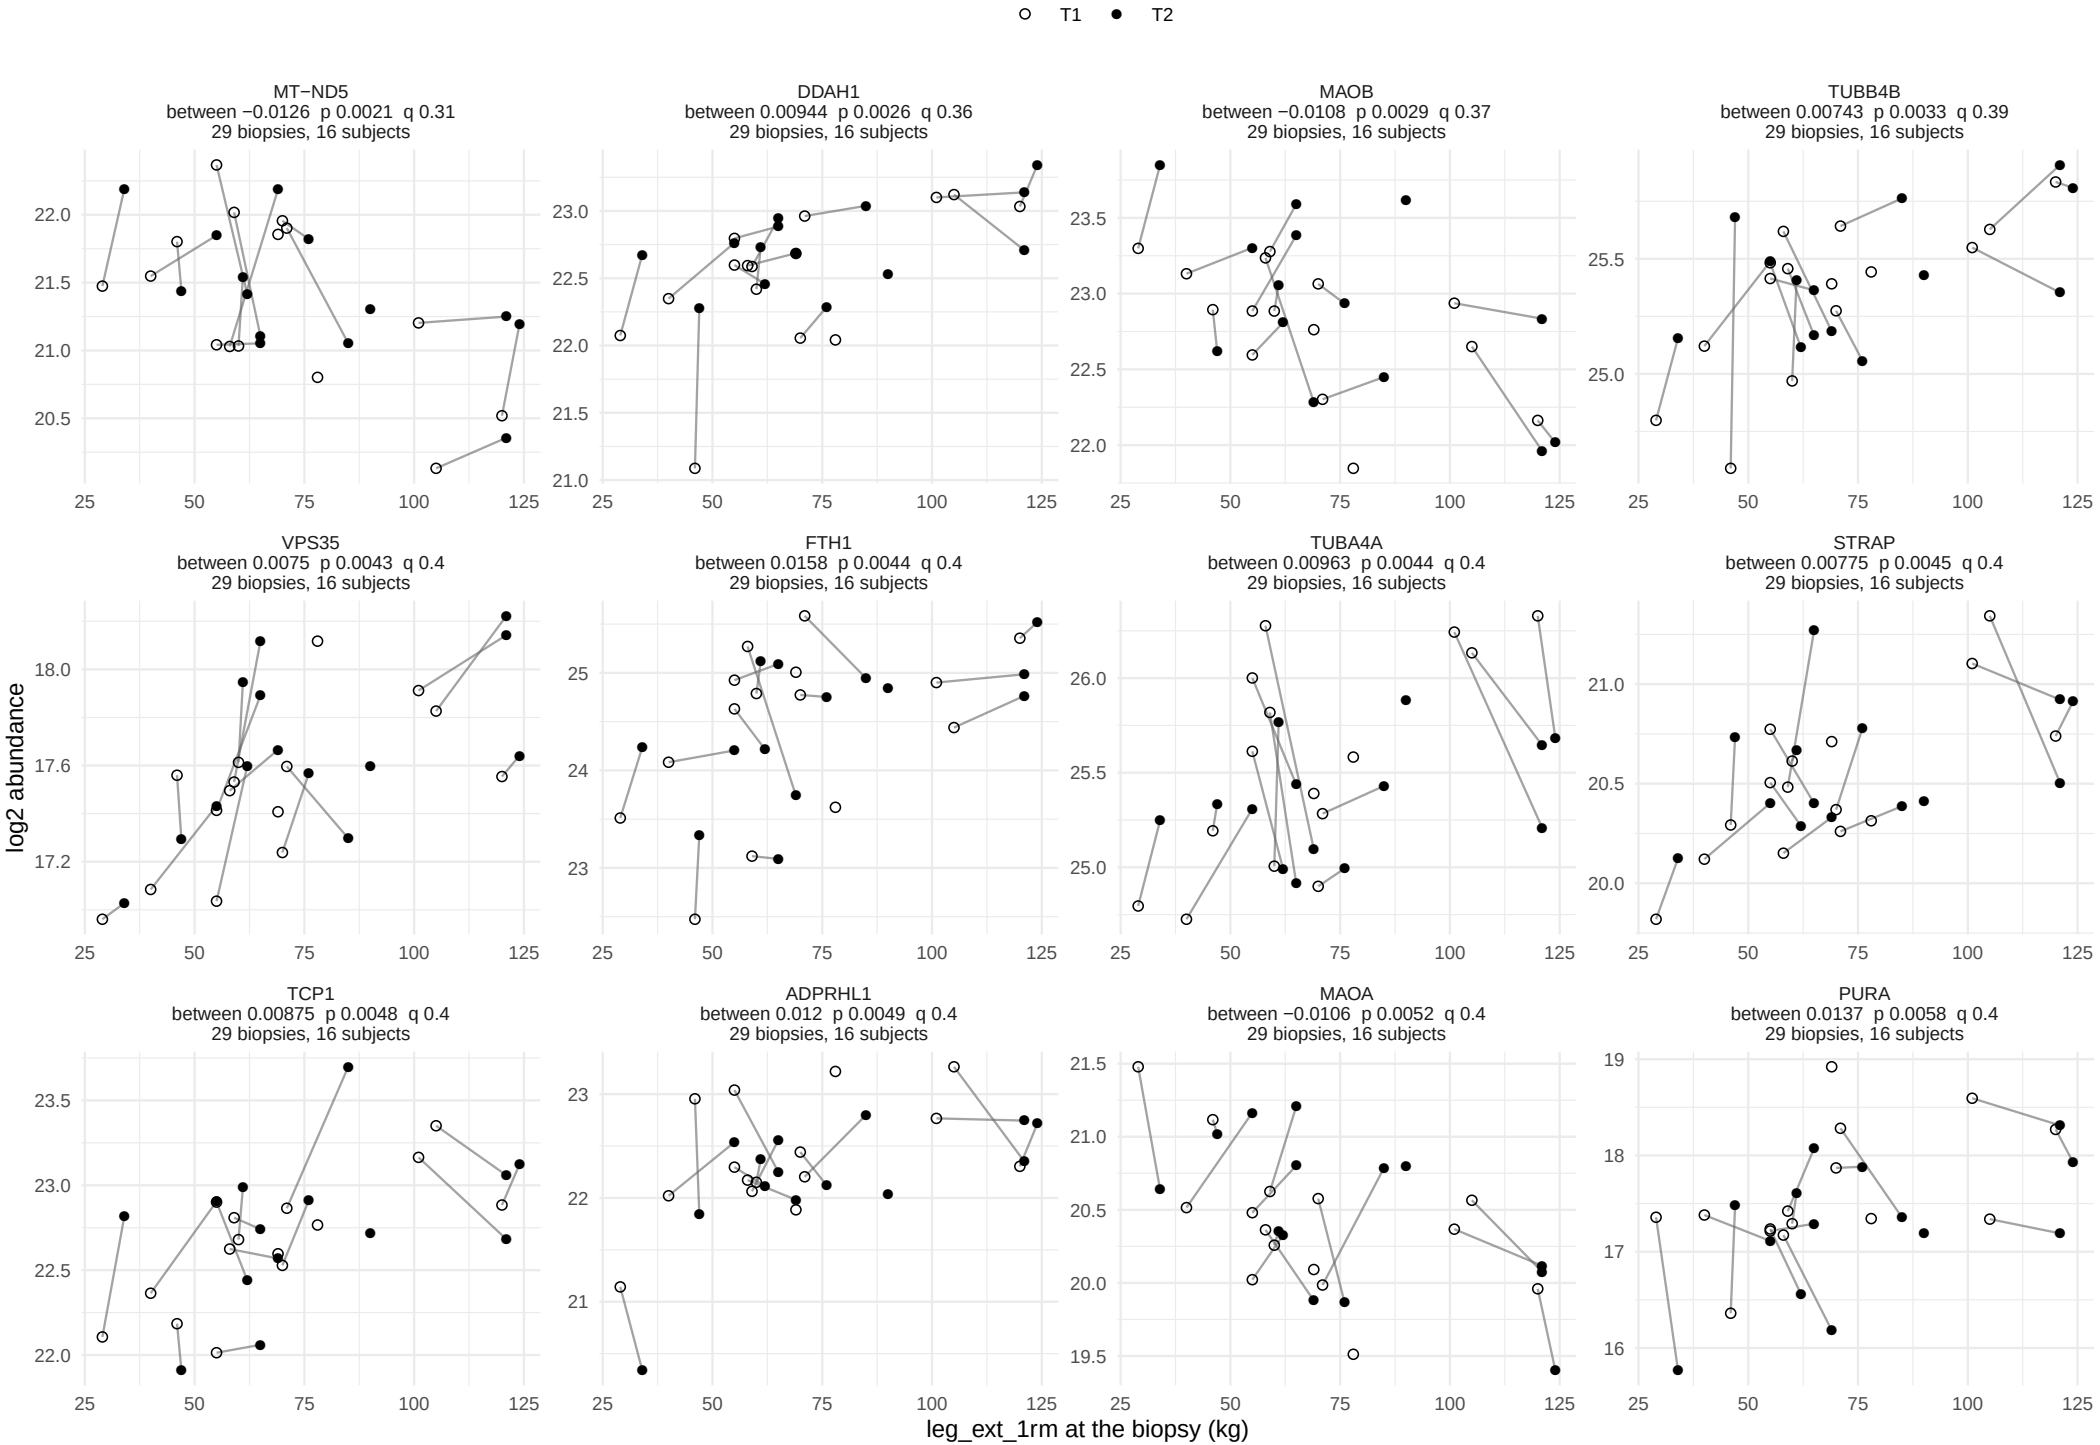

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

leg_ext_1rm, between−person term


130 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 3 of 11.

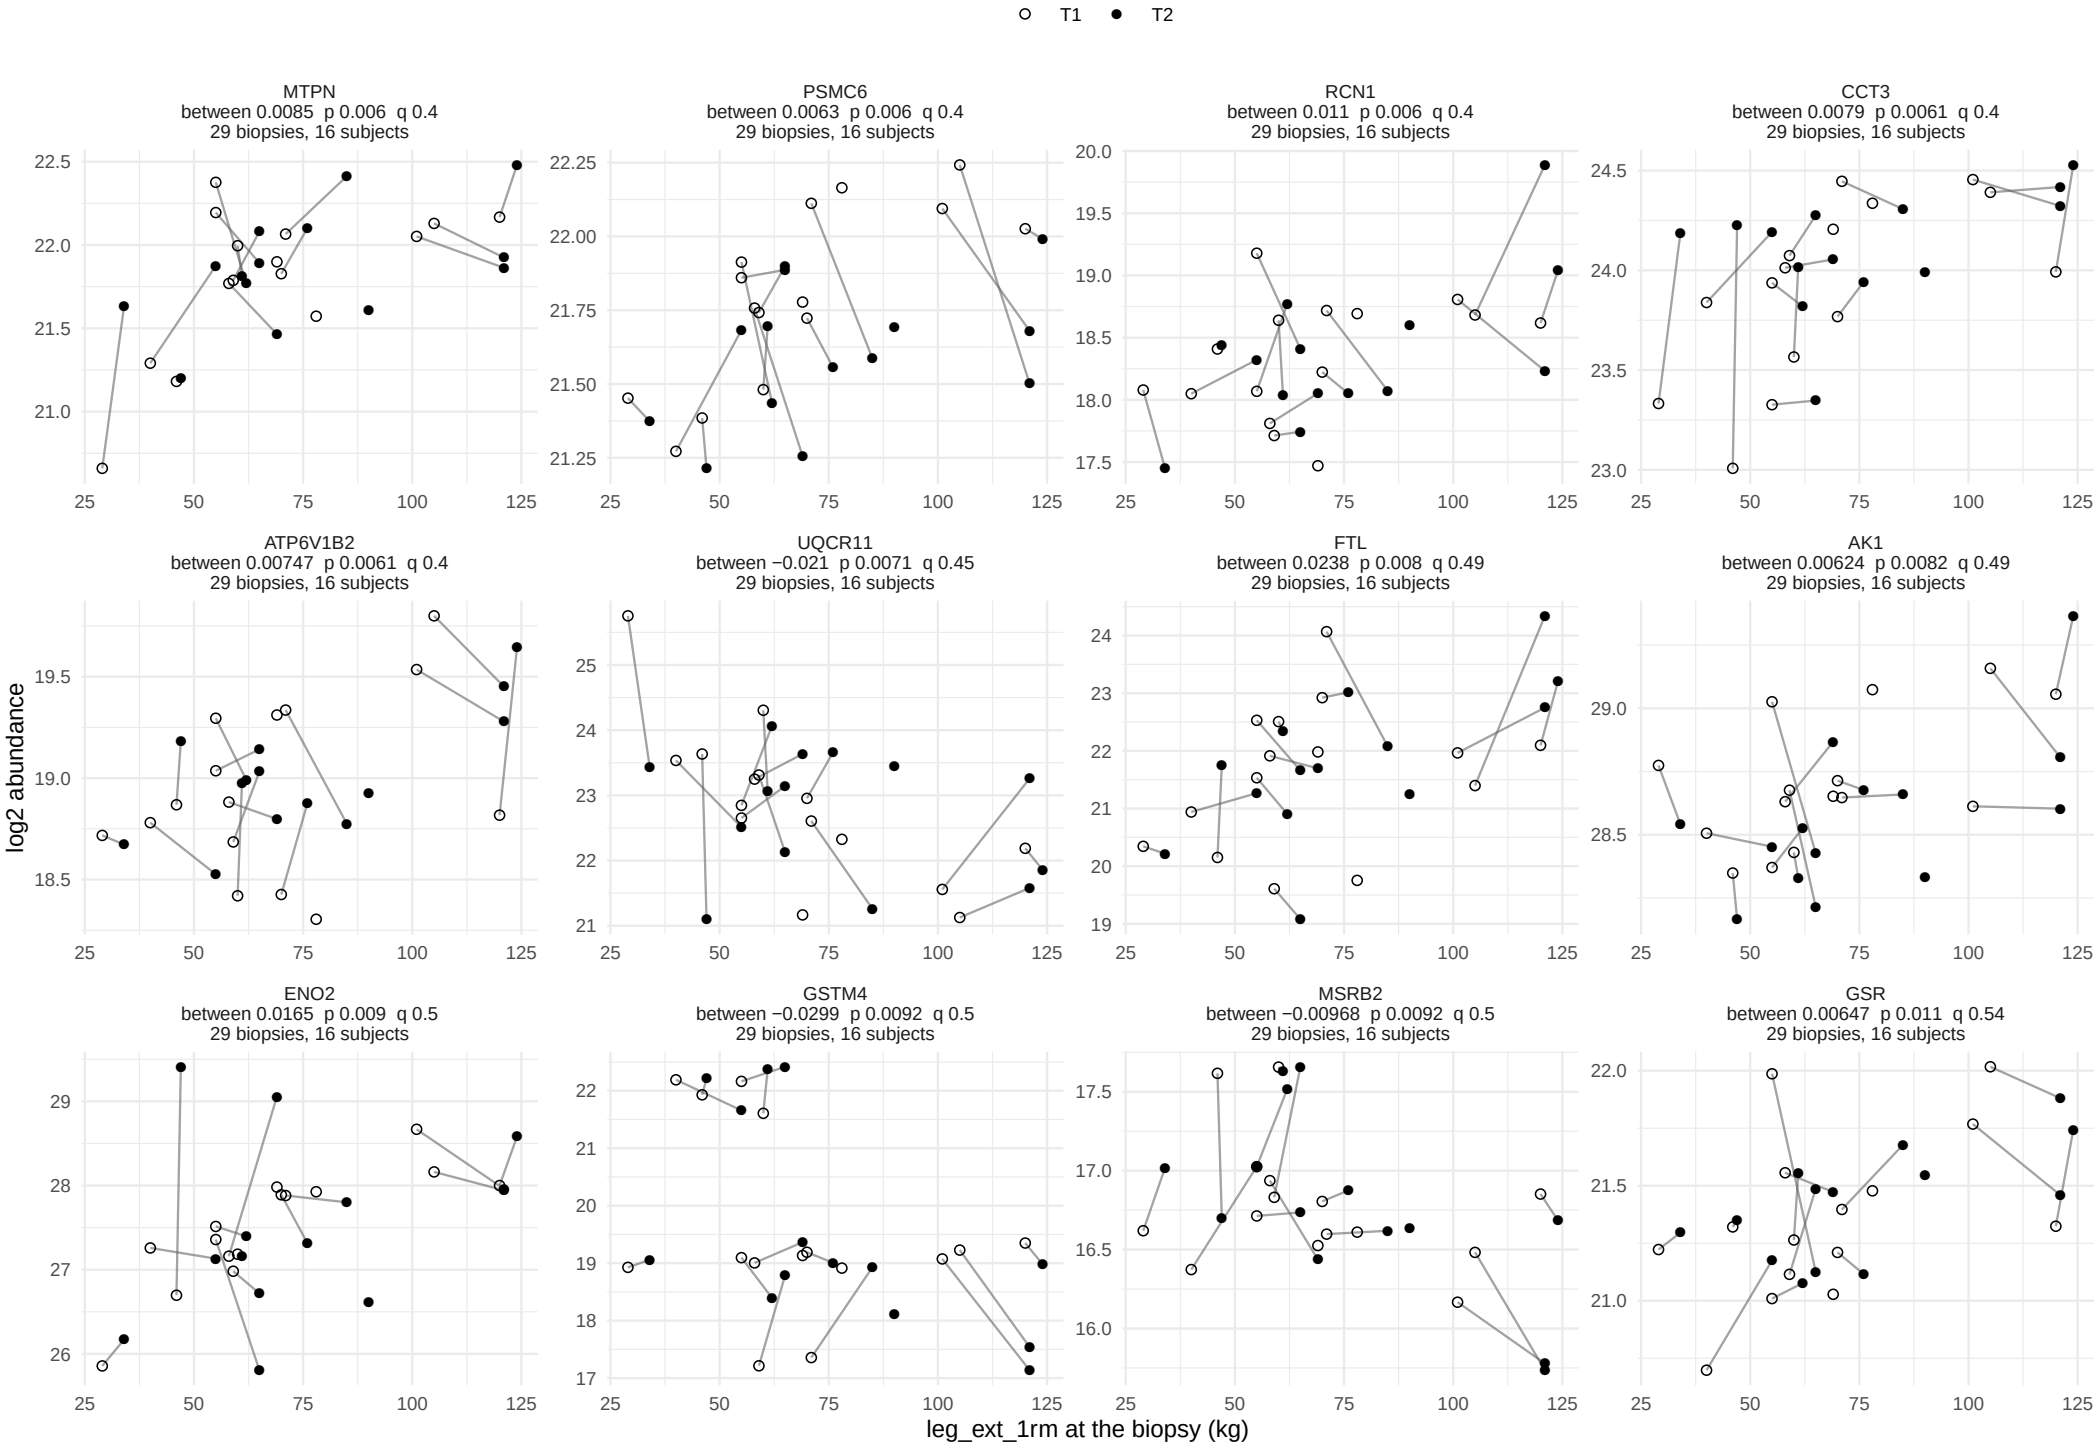

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

leg_ext_1rm, between−person term


130 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 4 of 11.

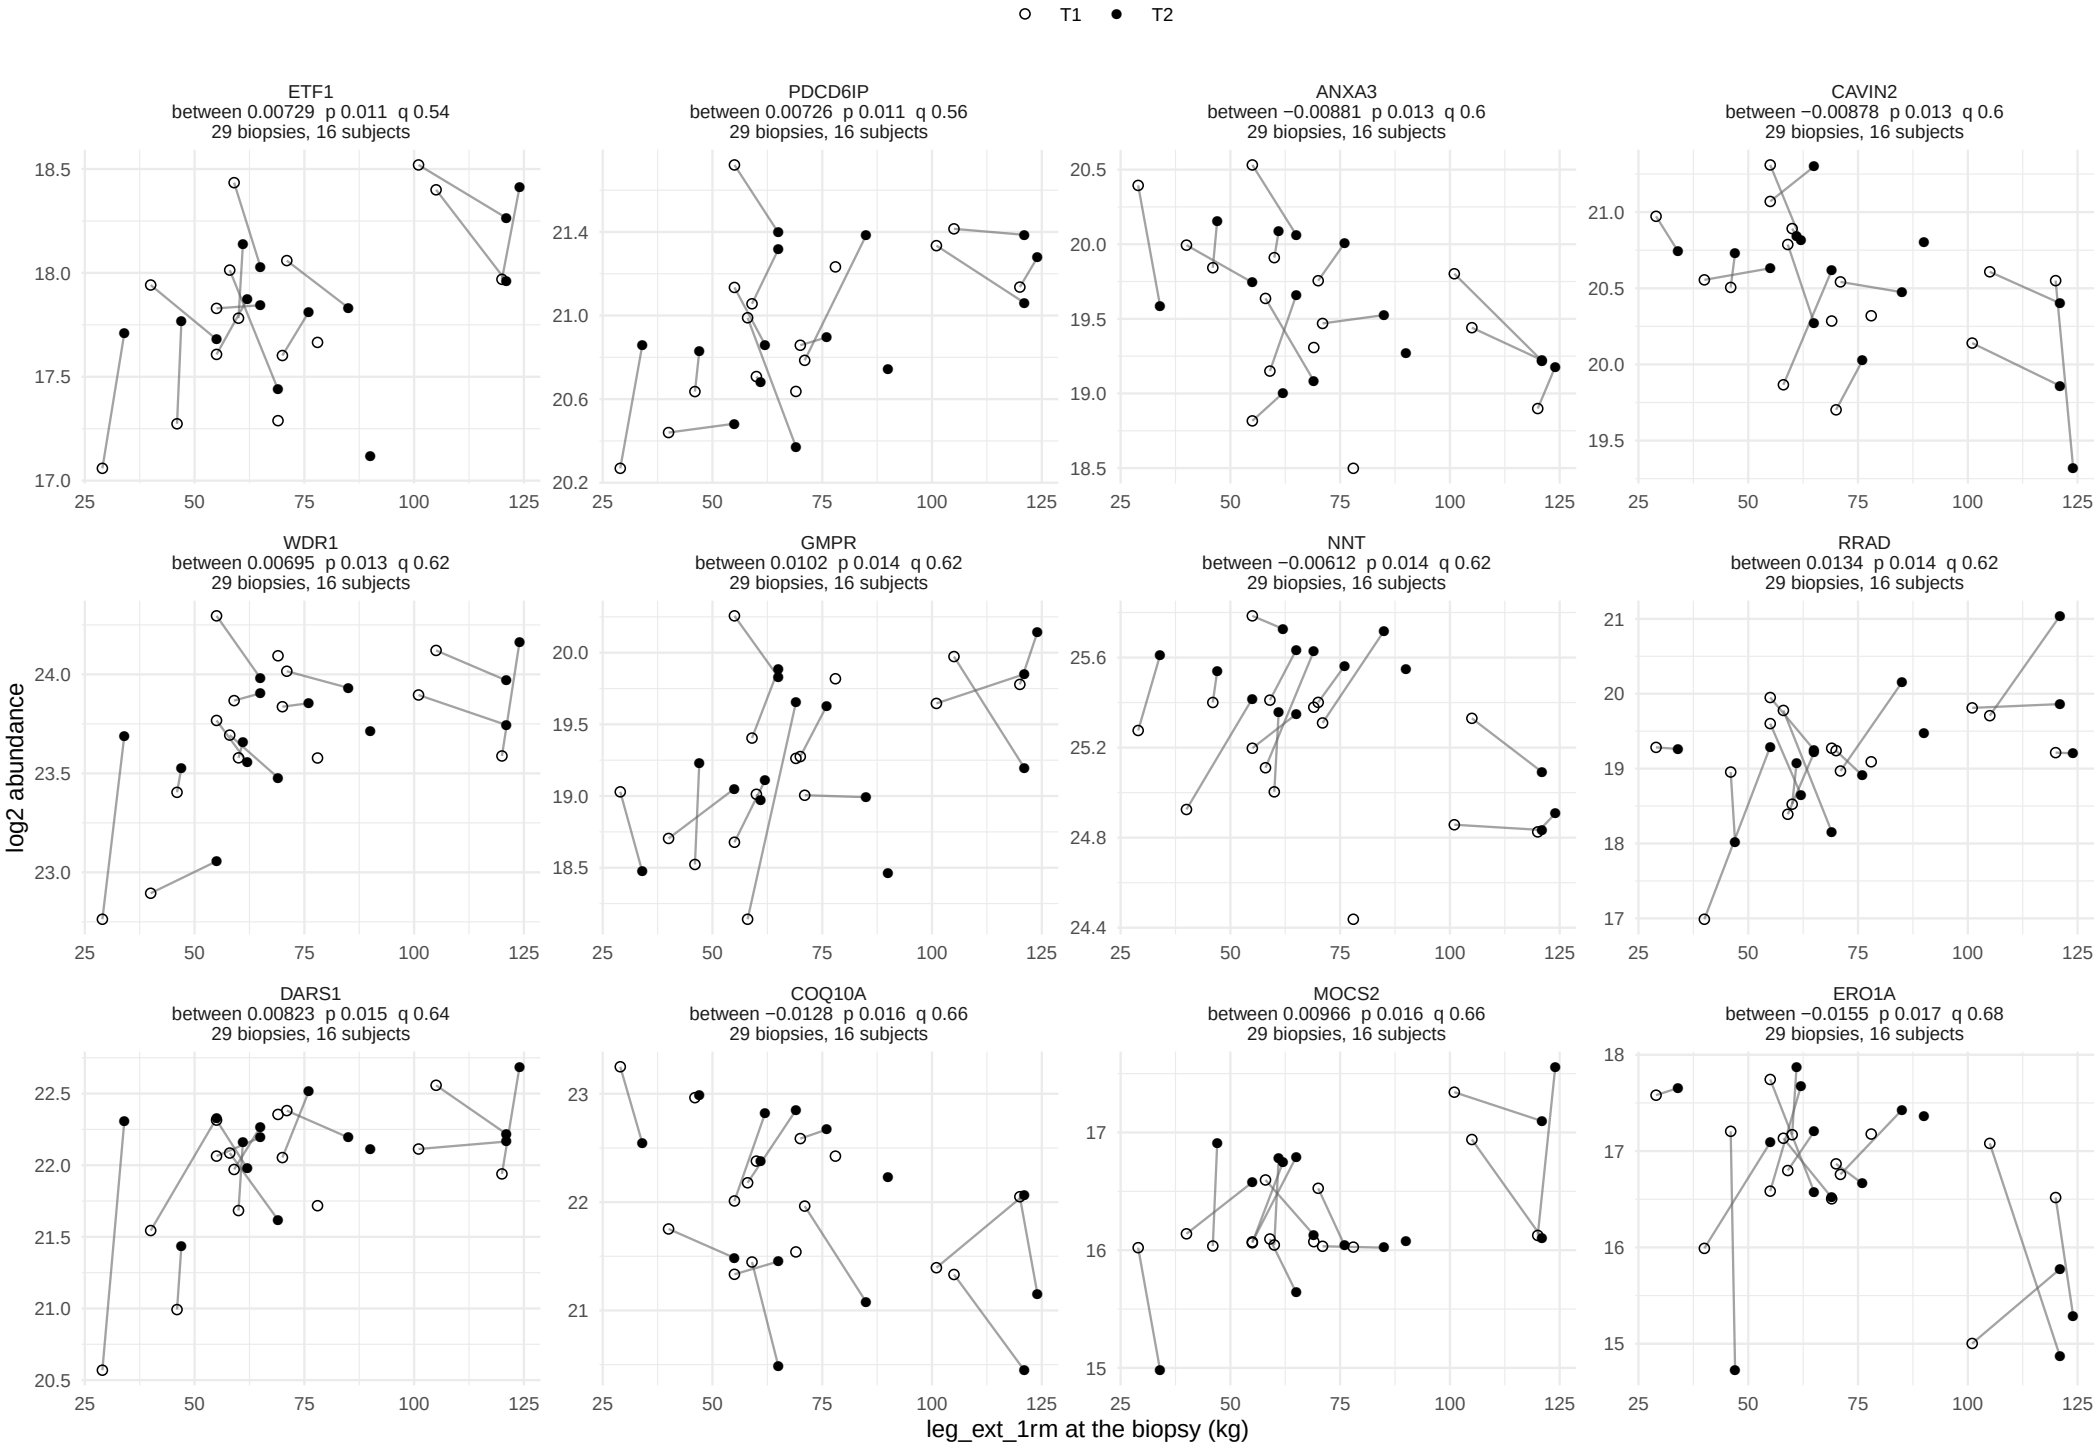

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

leg_ext_1rm, between−person term


130 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 5 of 11.

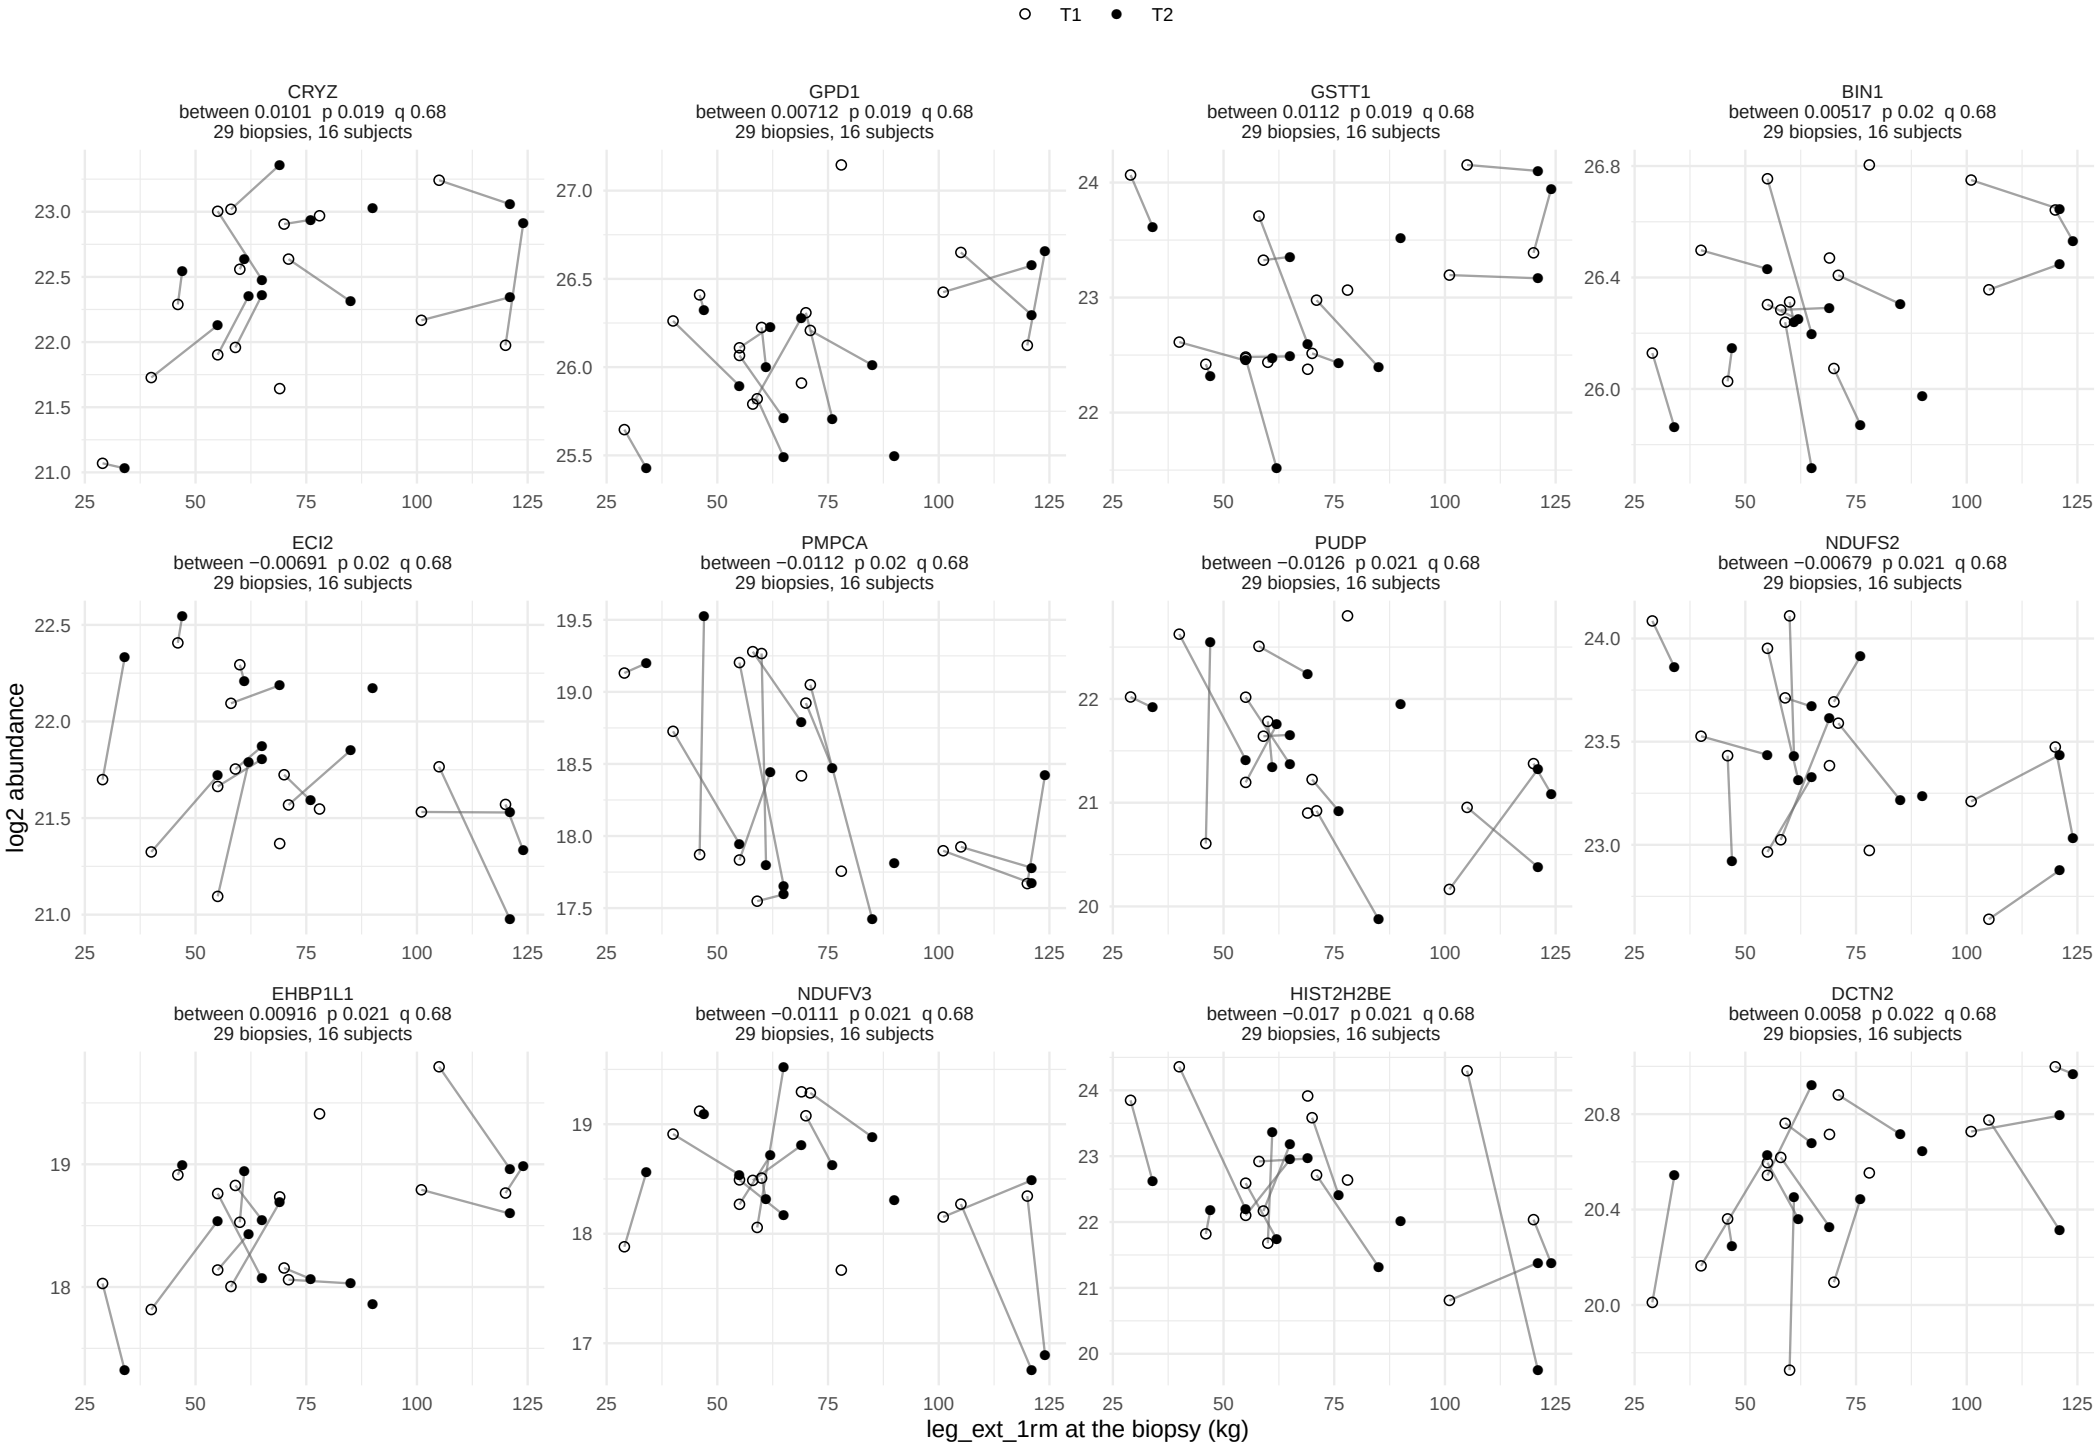

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

leg_ext_1rm, between−person term


130 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 6 of 11.

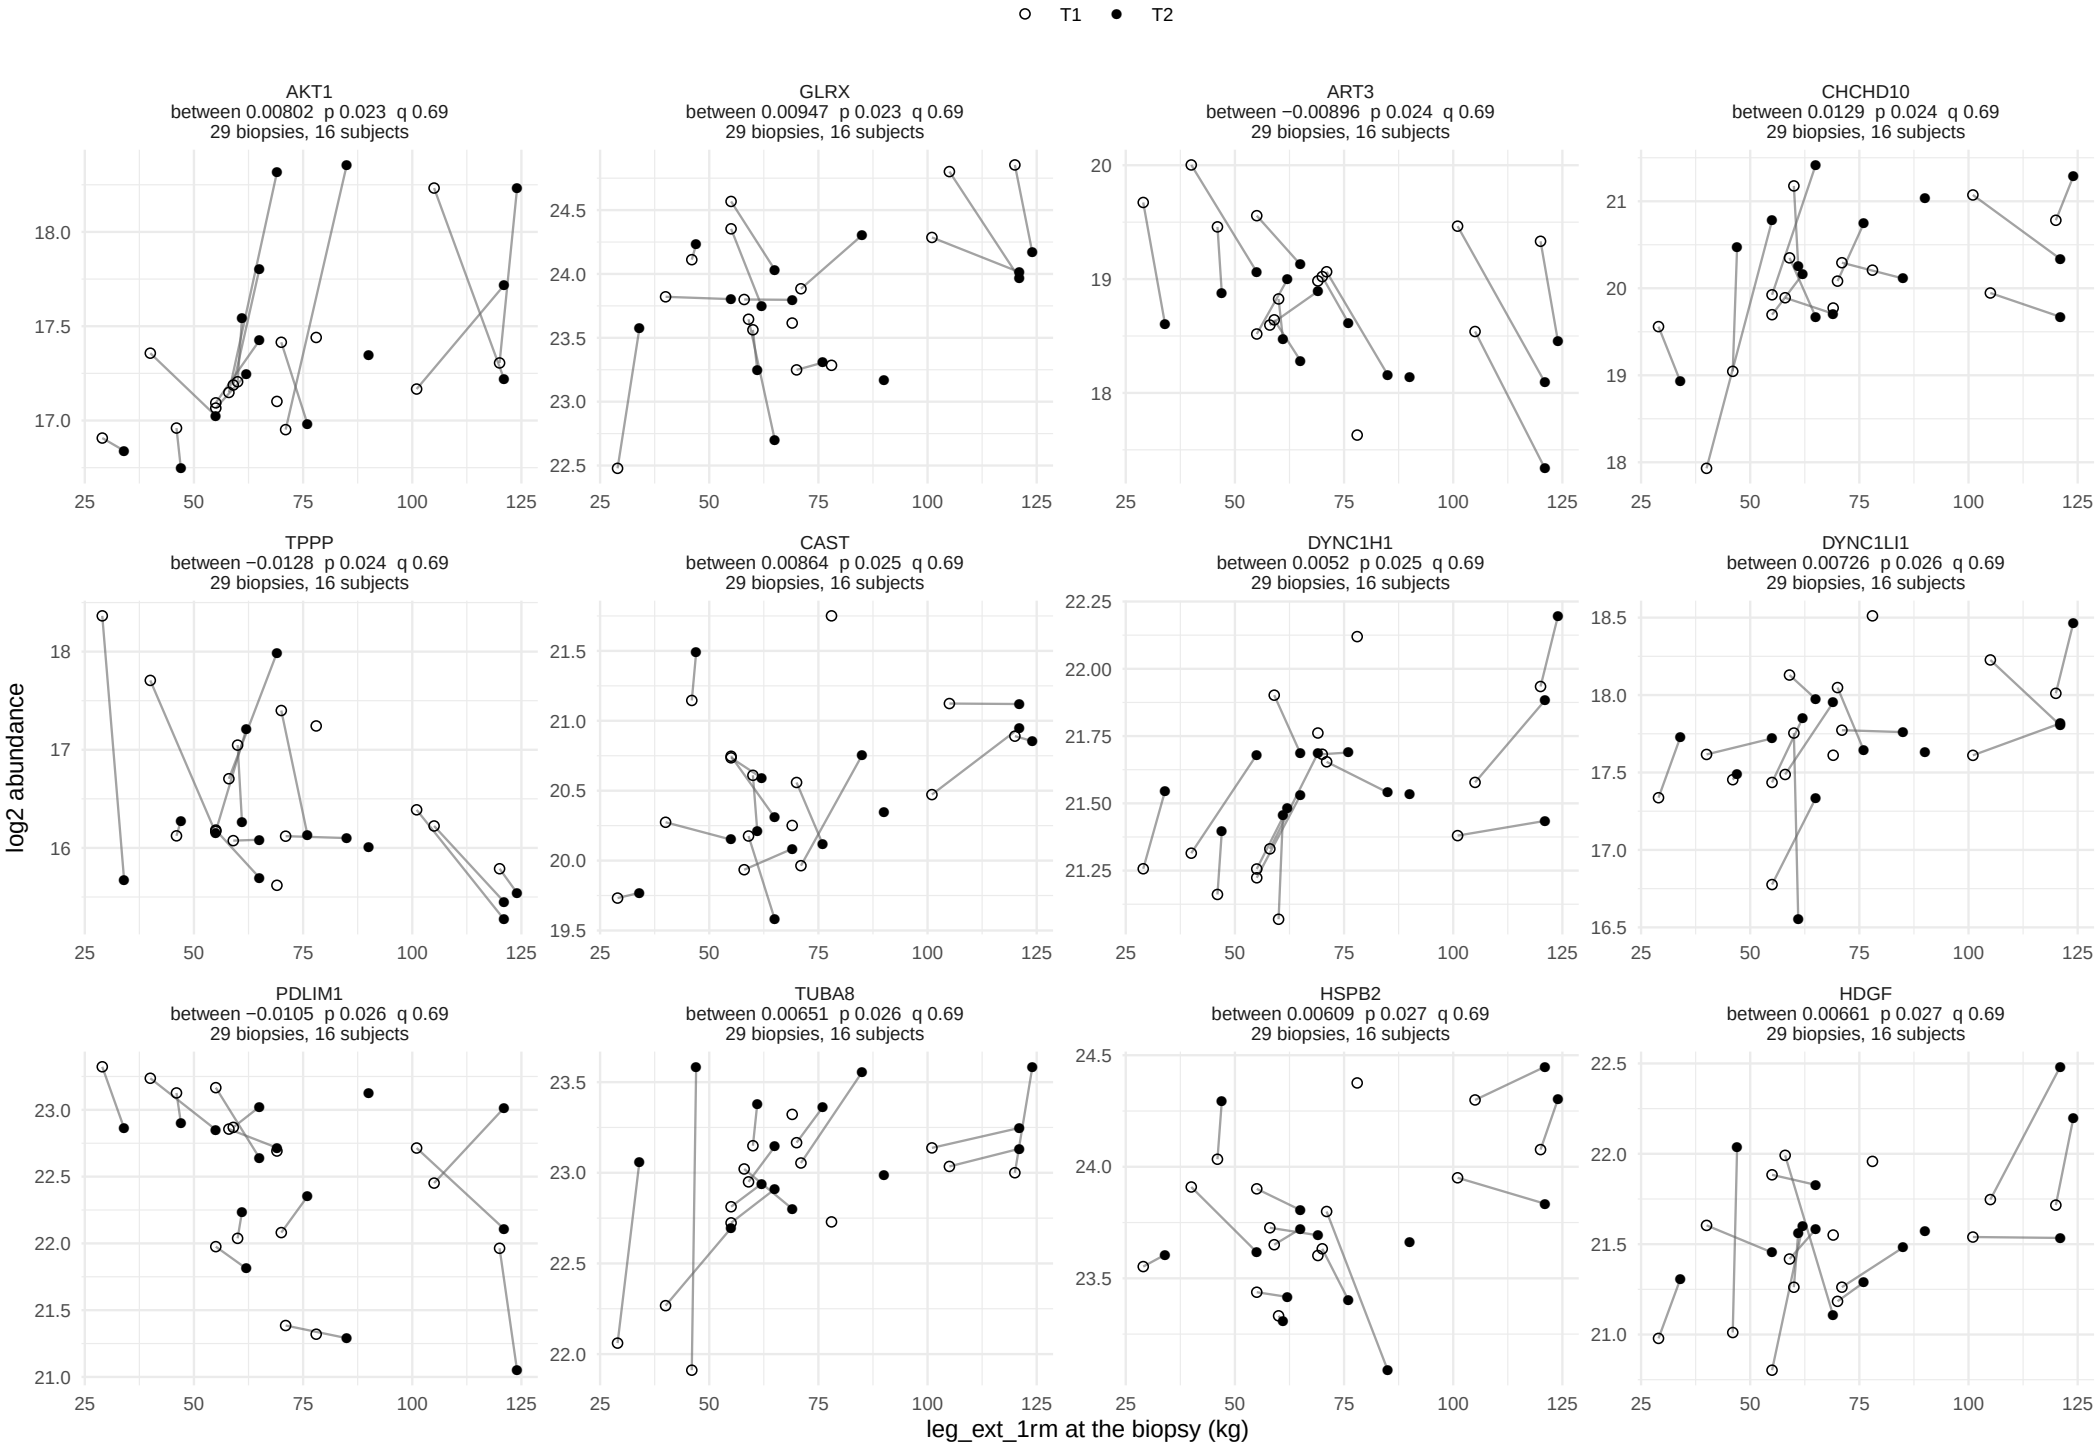

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

leg_ext_1rm, between−person term


130 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 7 of 11.

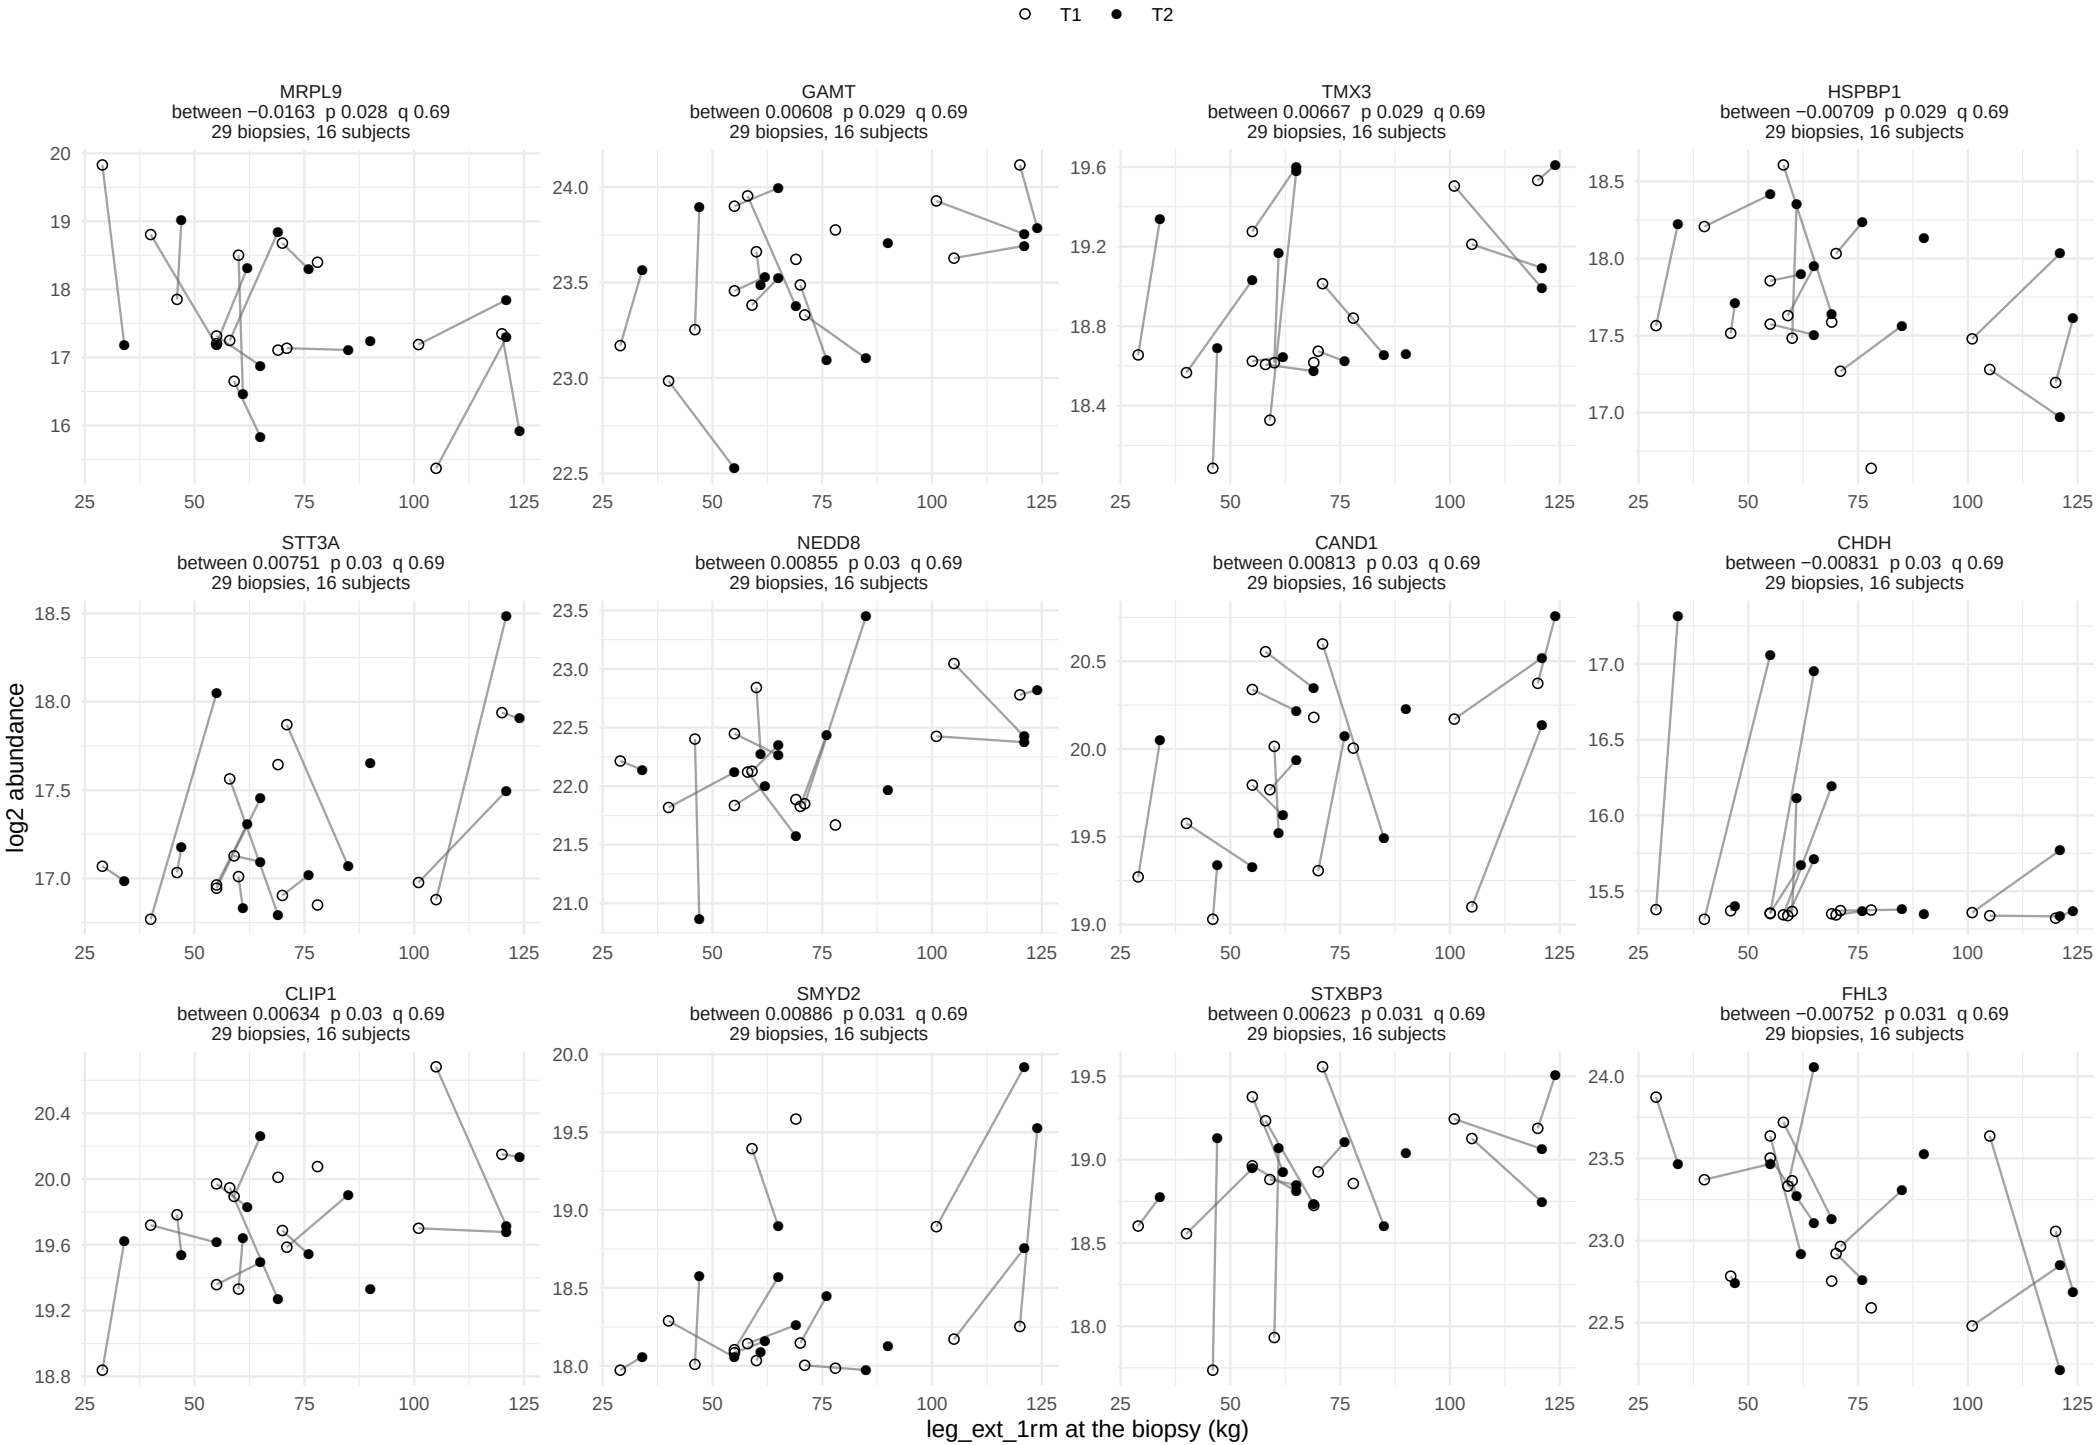

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

leg_ext_1rm, between−person term


130 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 8 of 11.

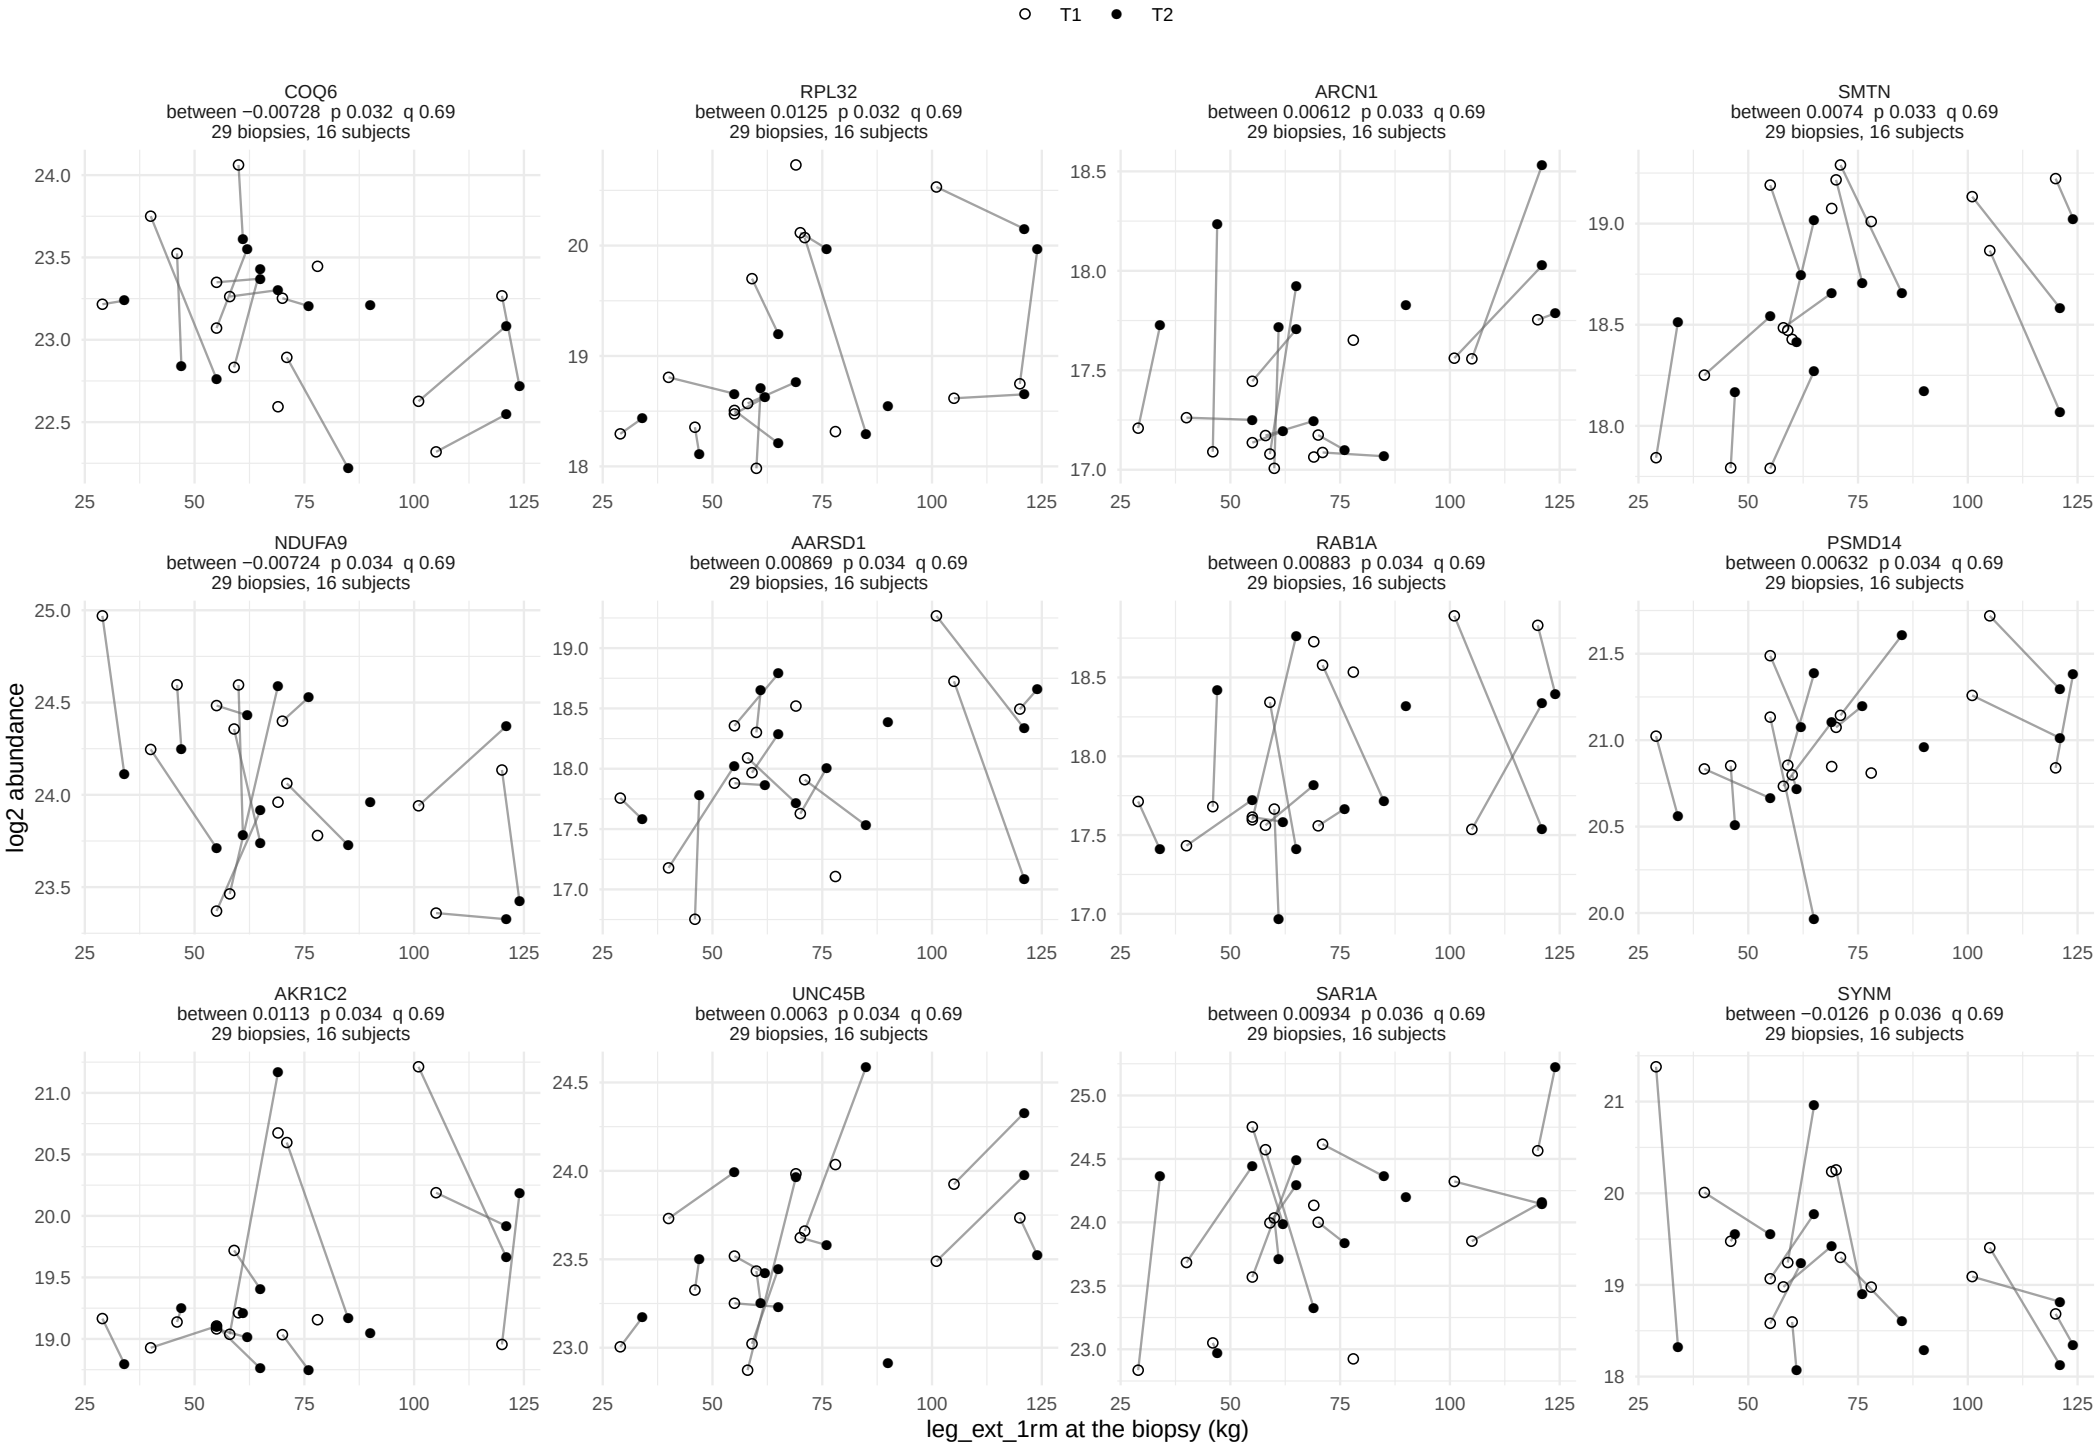

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

leg_ext_1rm, between−person term


130 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 9 of 11.

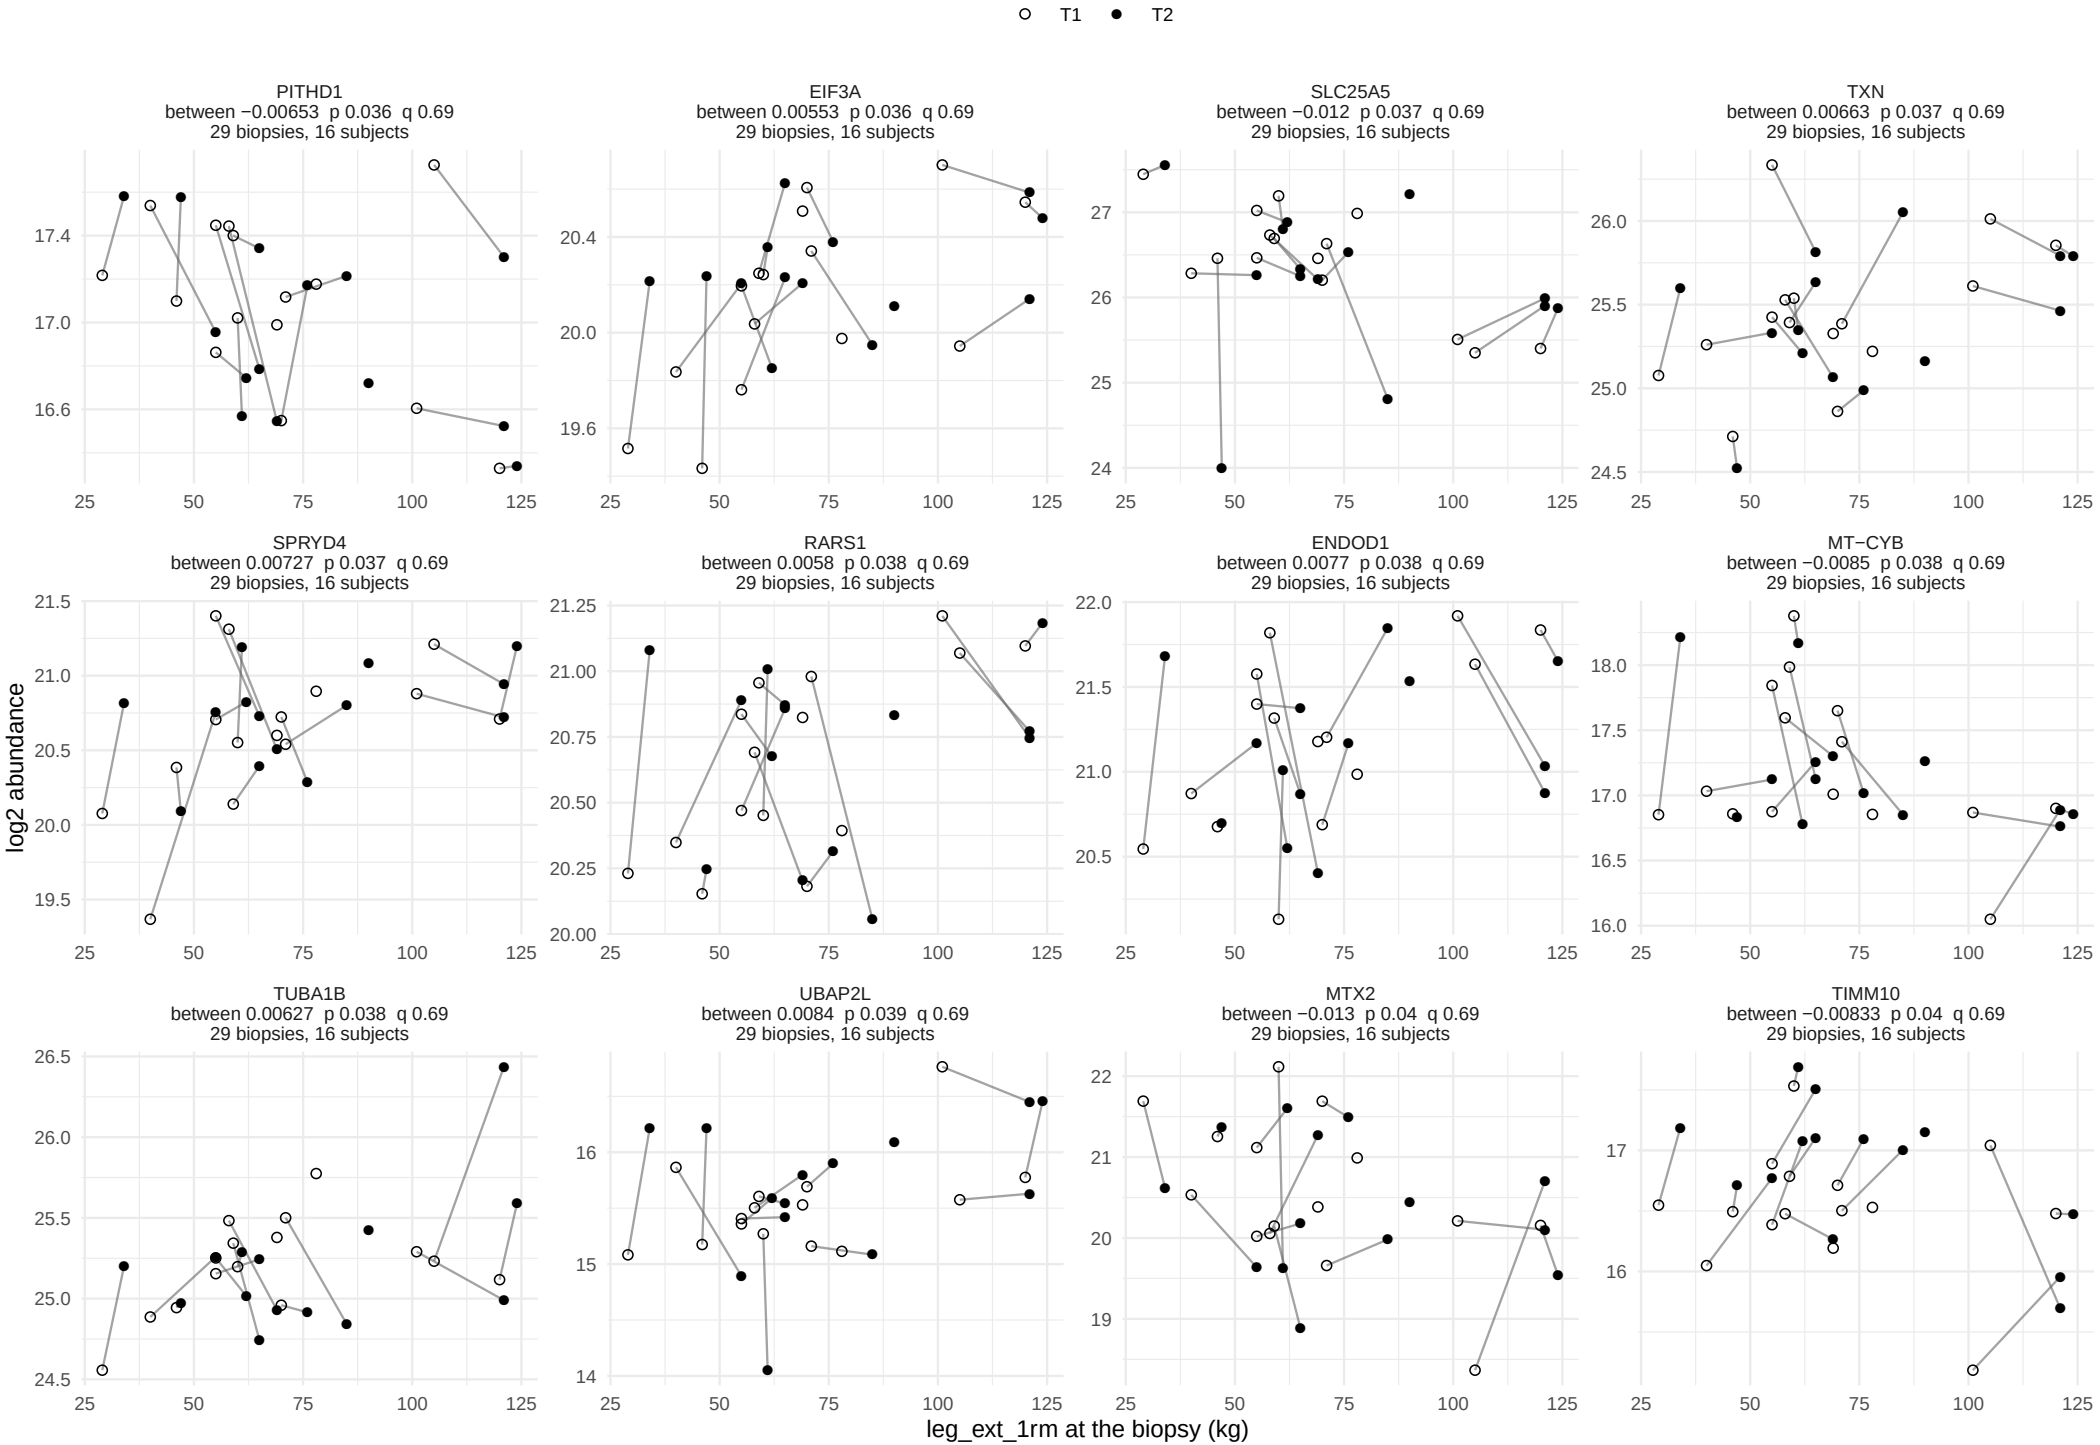

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

leg_ext_1rm, between−person term


130 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 10 of 11.

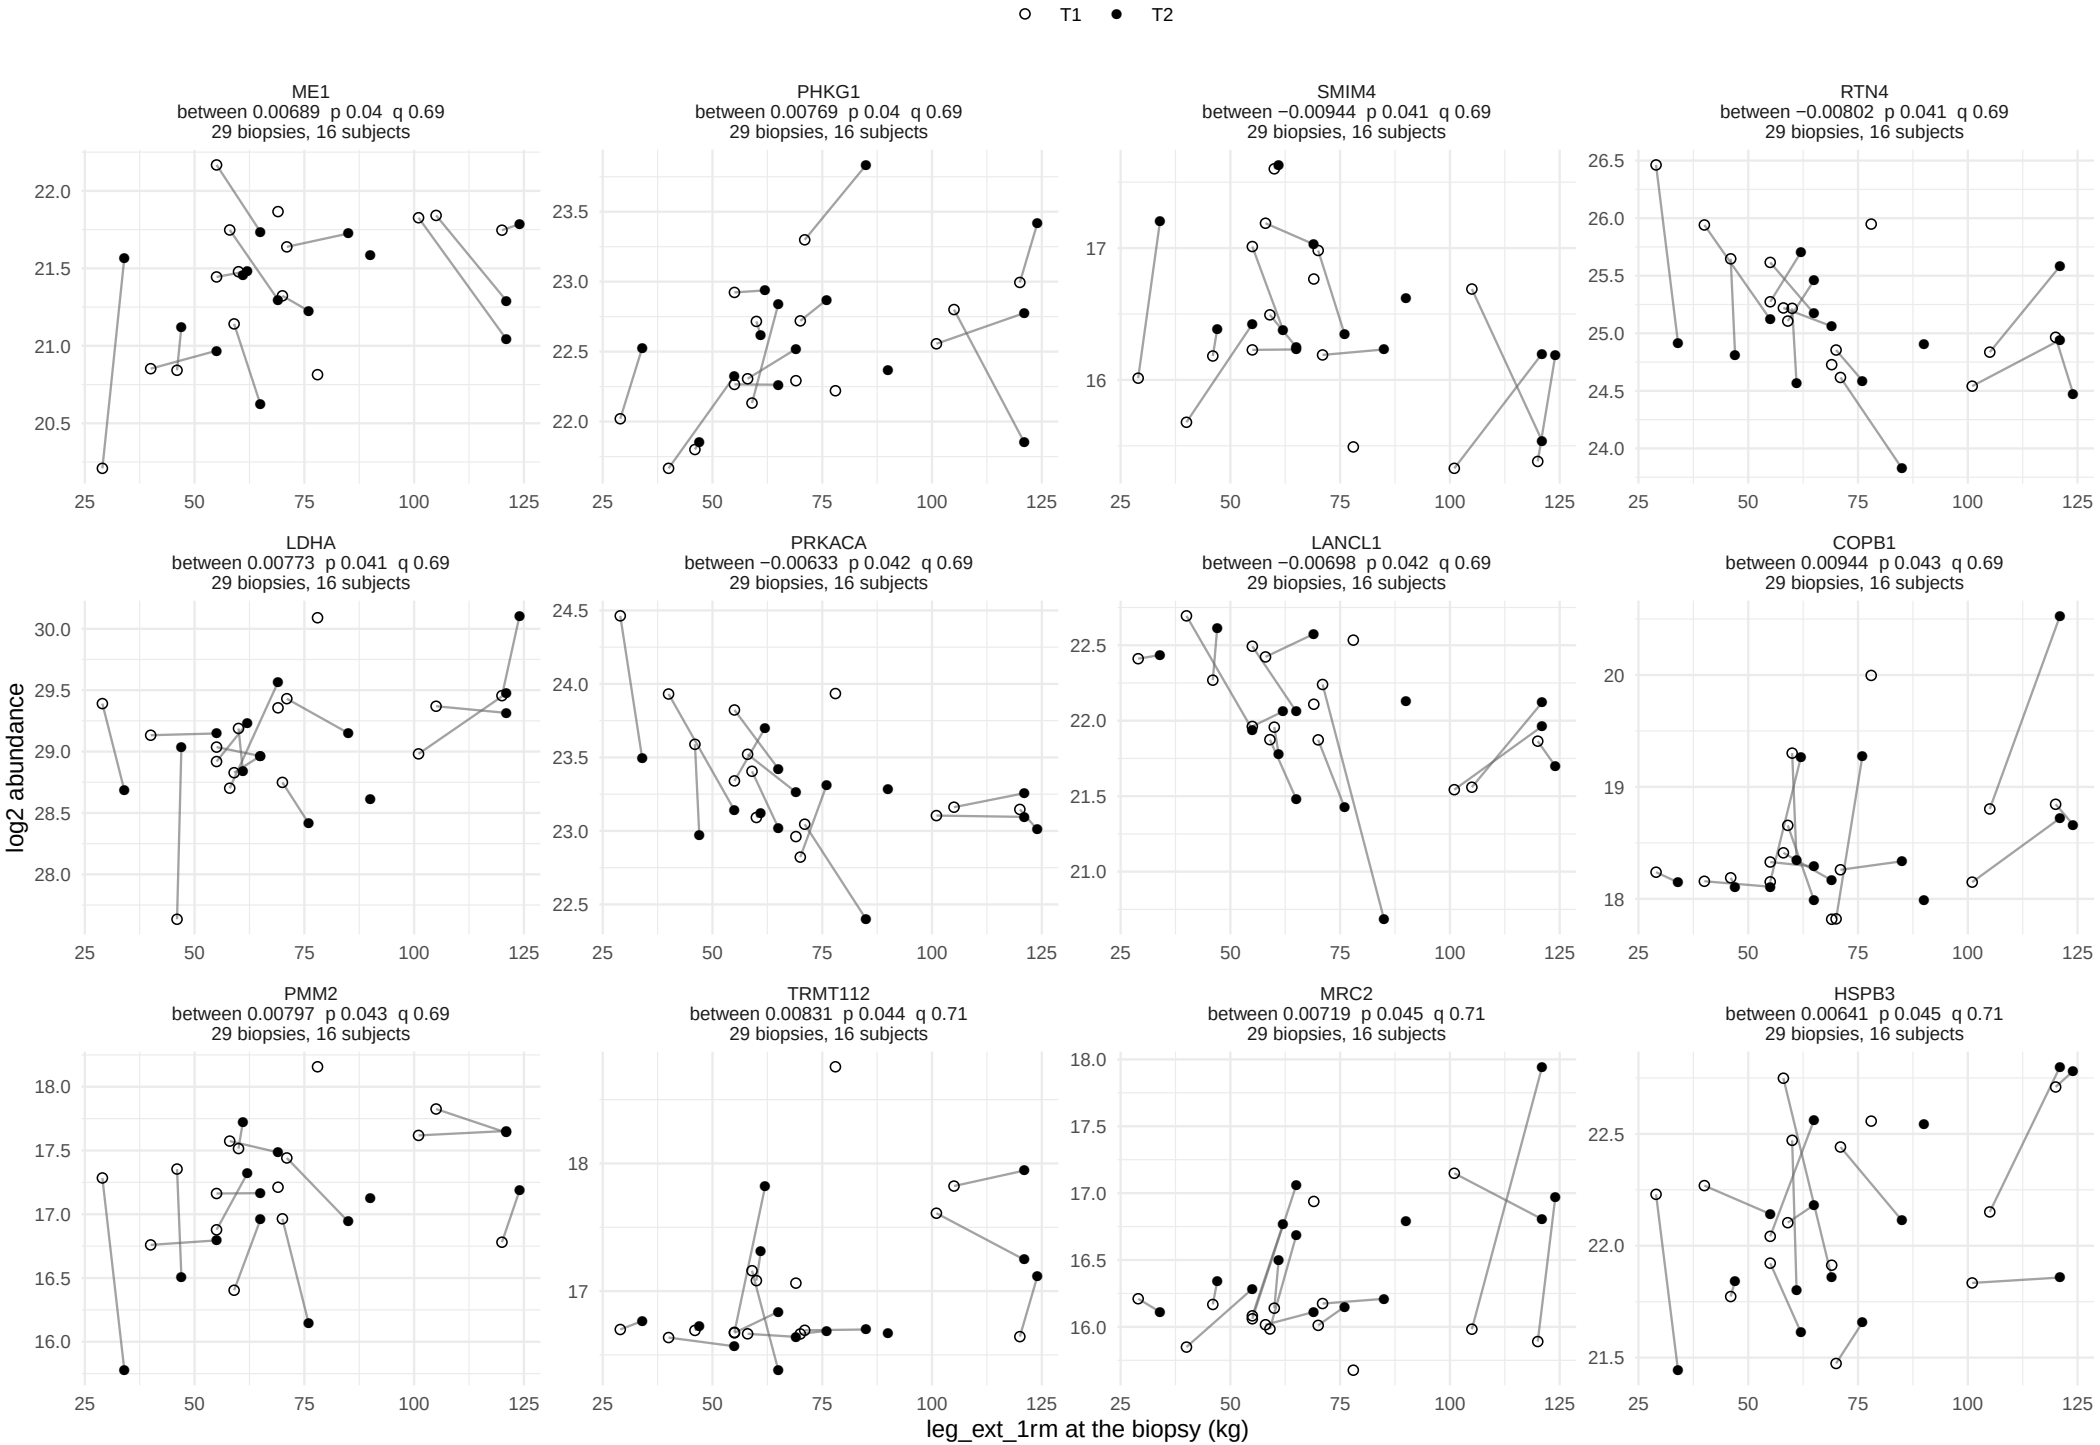

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

leg_ext_1rm, between−person term


130 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 11 of 11.

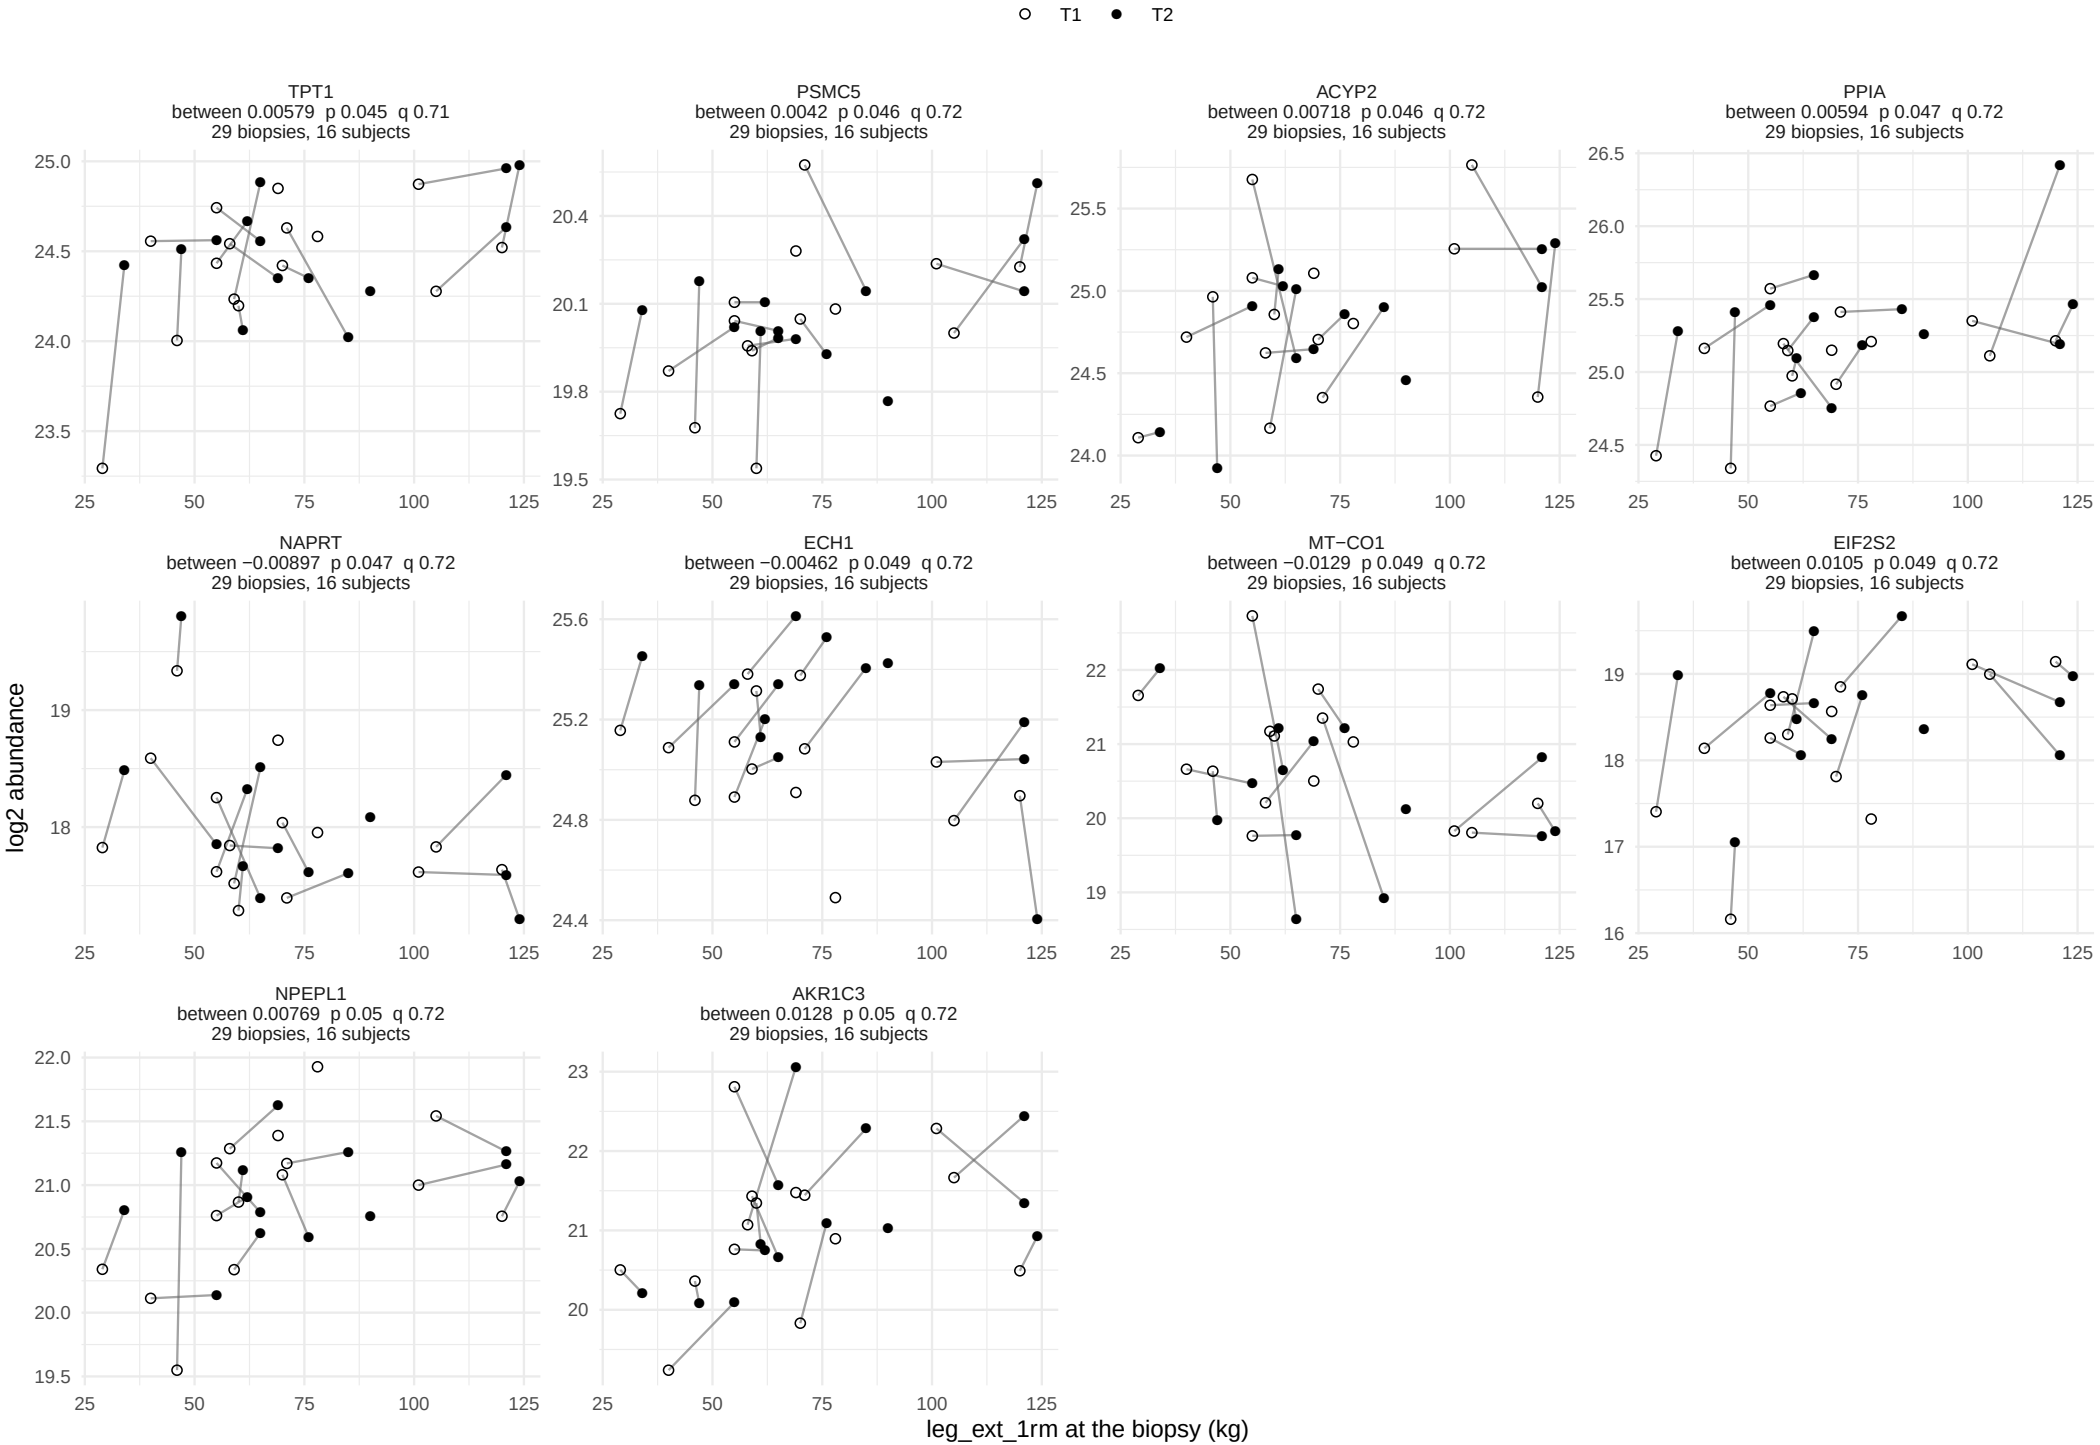

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/01_proteins.xlsx, model.

Change score, training window


605 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 1 of 51.

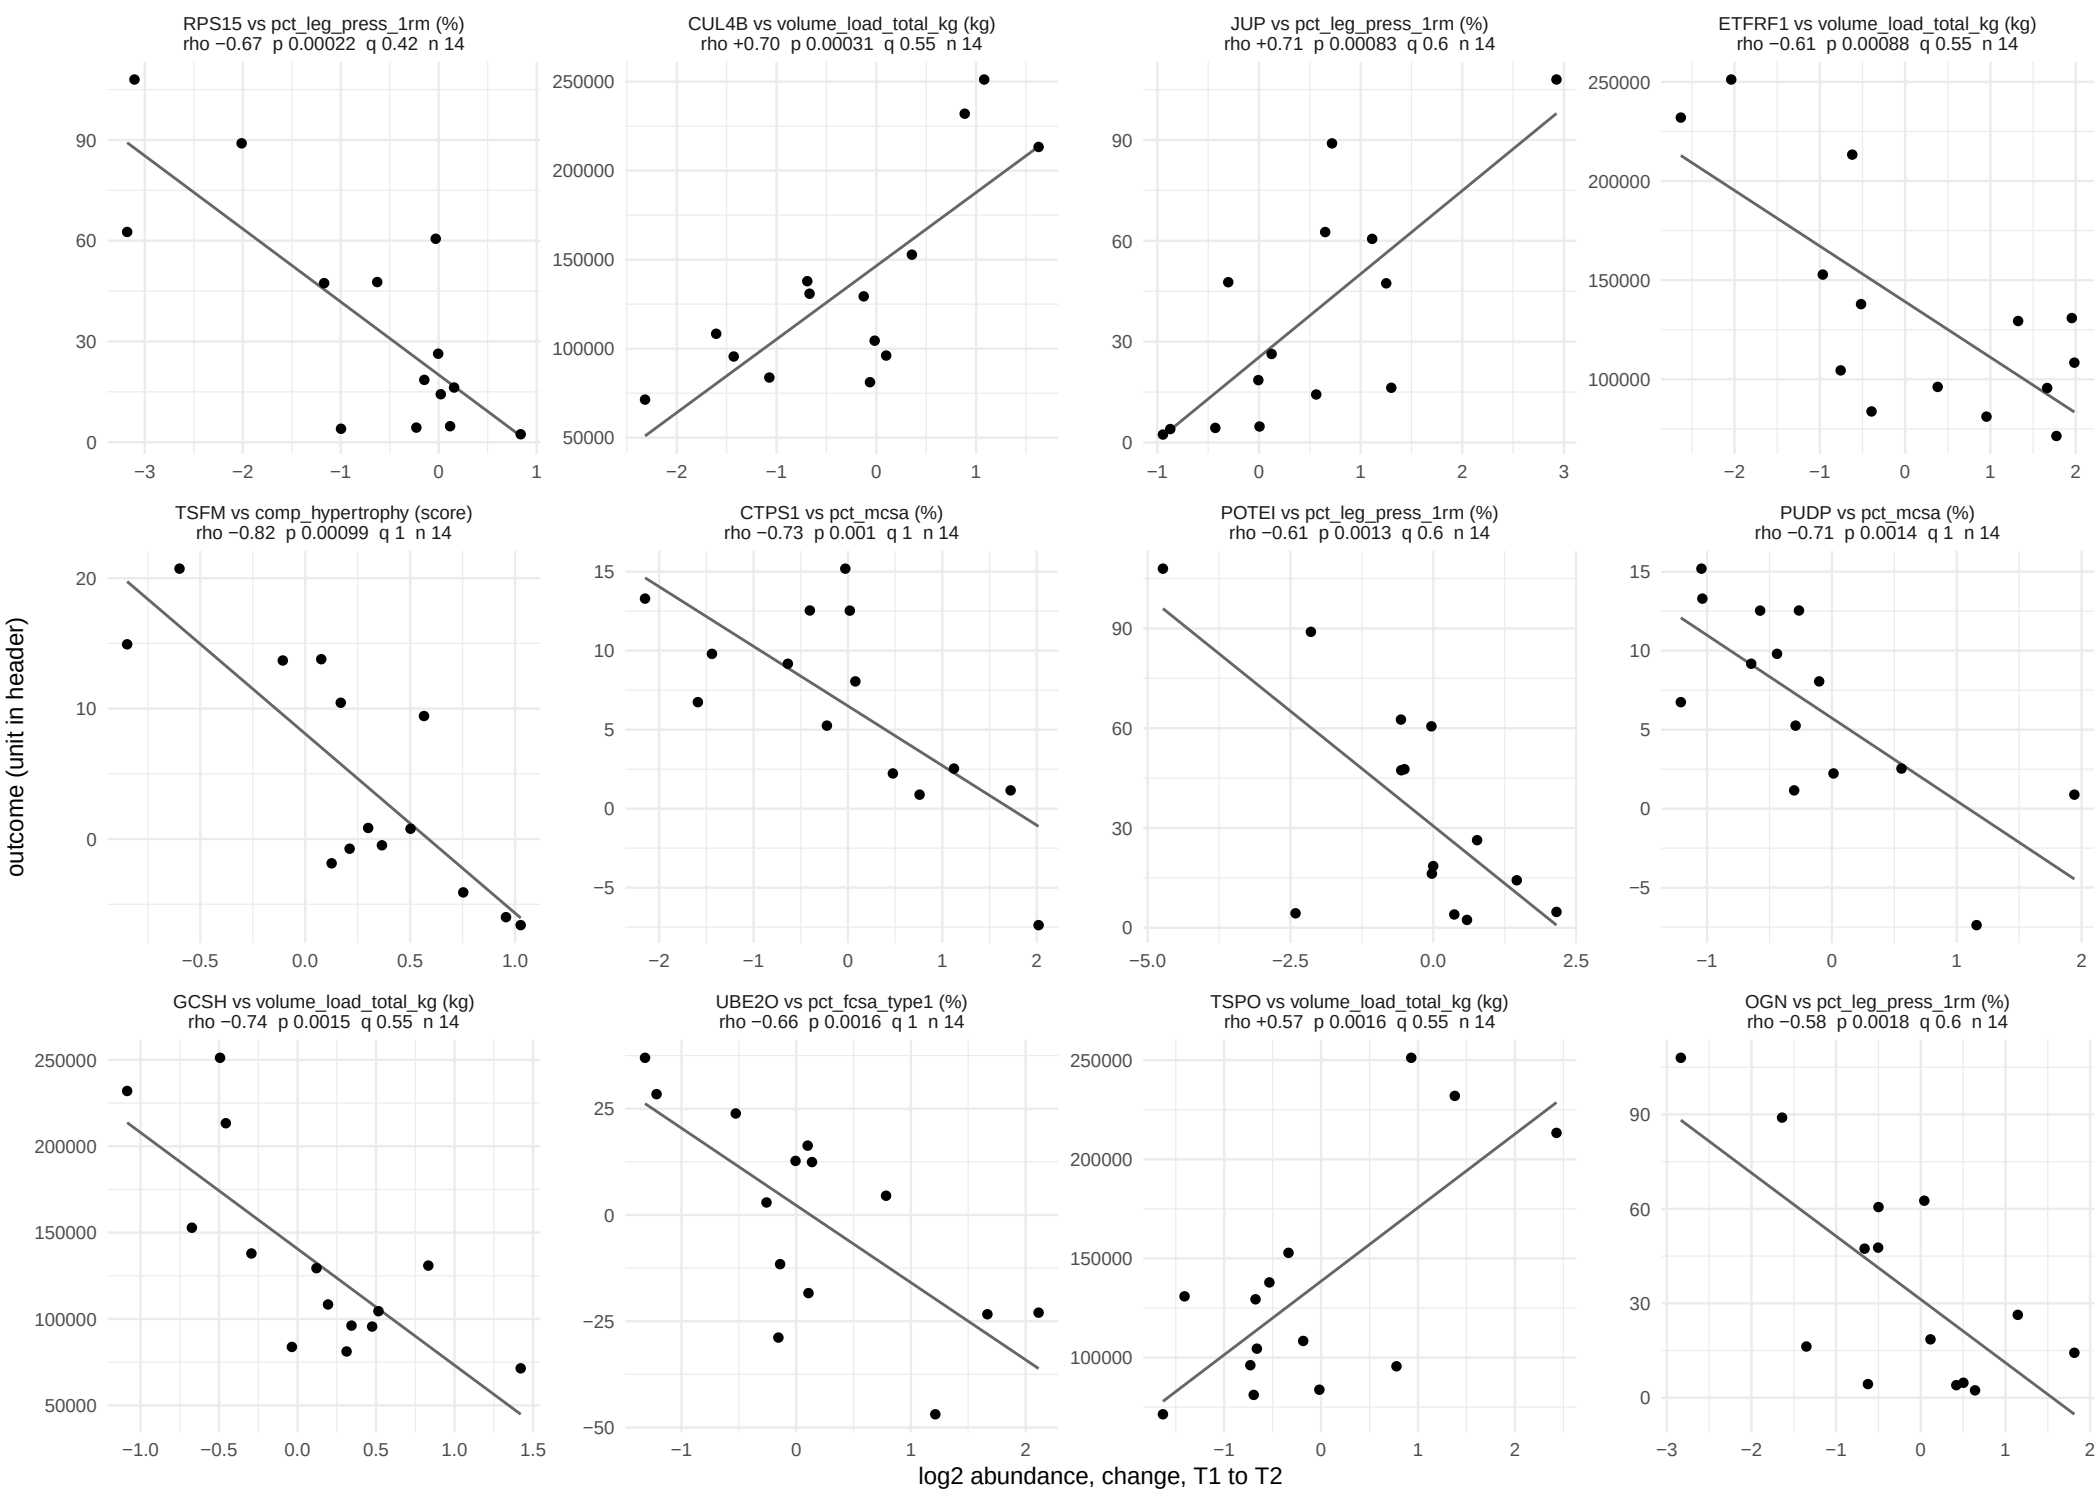

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, training window


605 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 2 of 51.

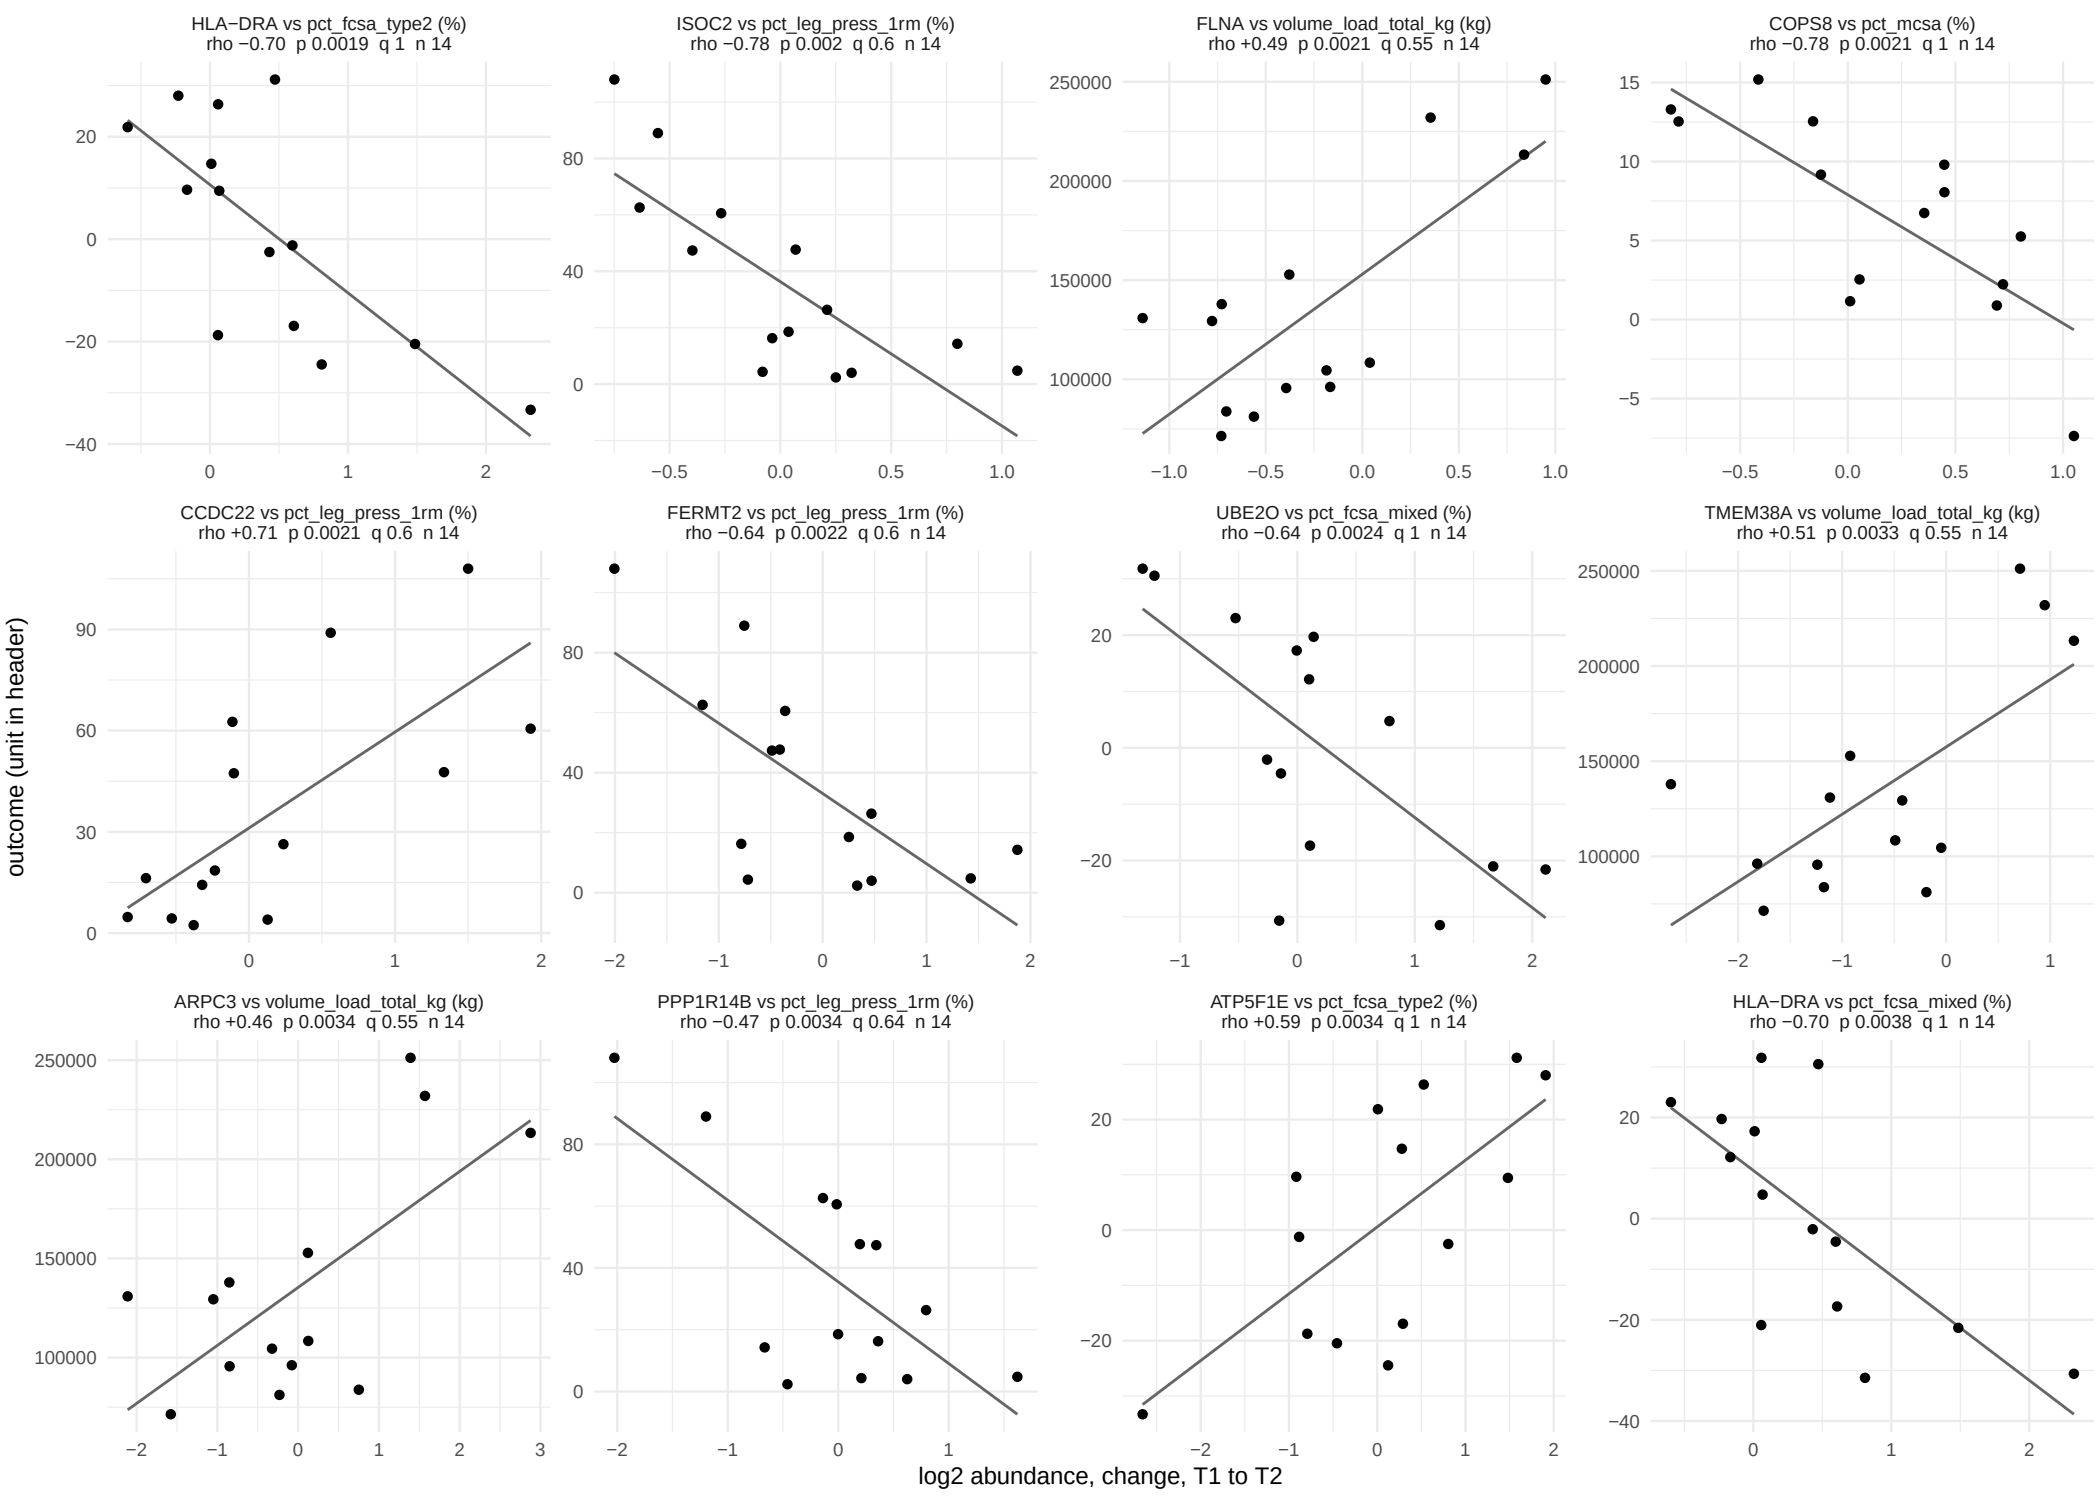

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, training window


605 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 3 of 51.

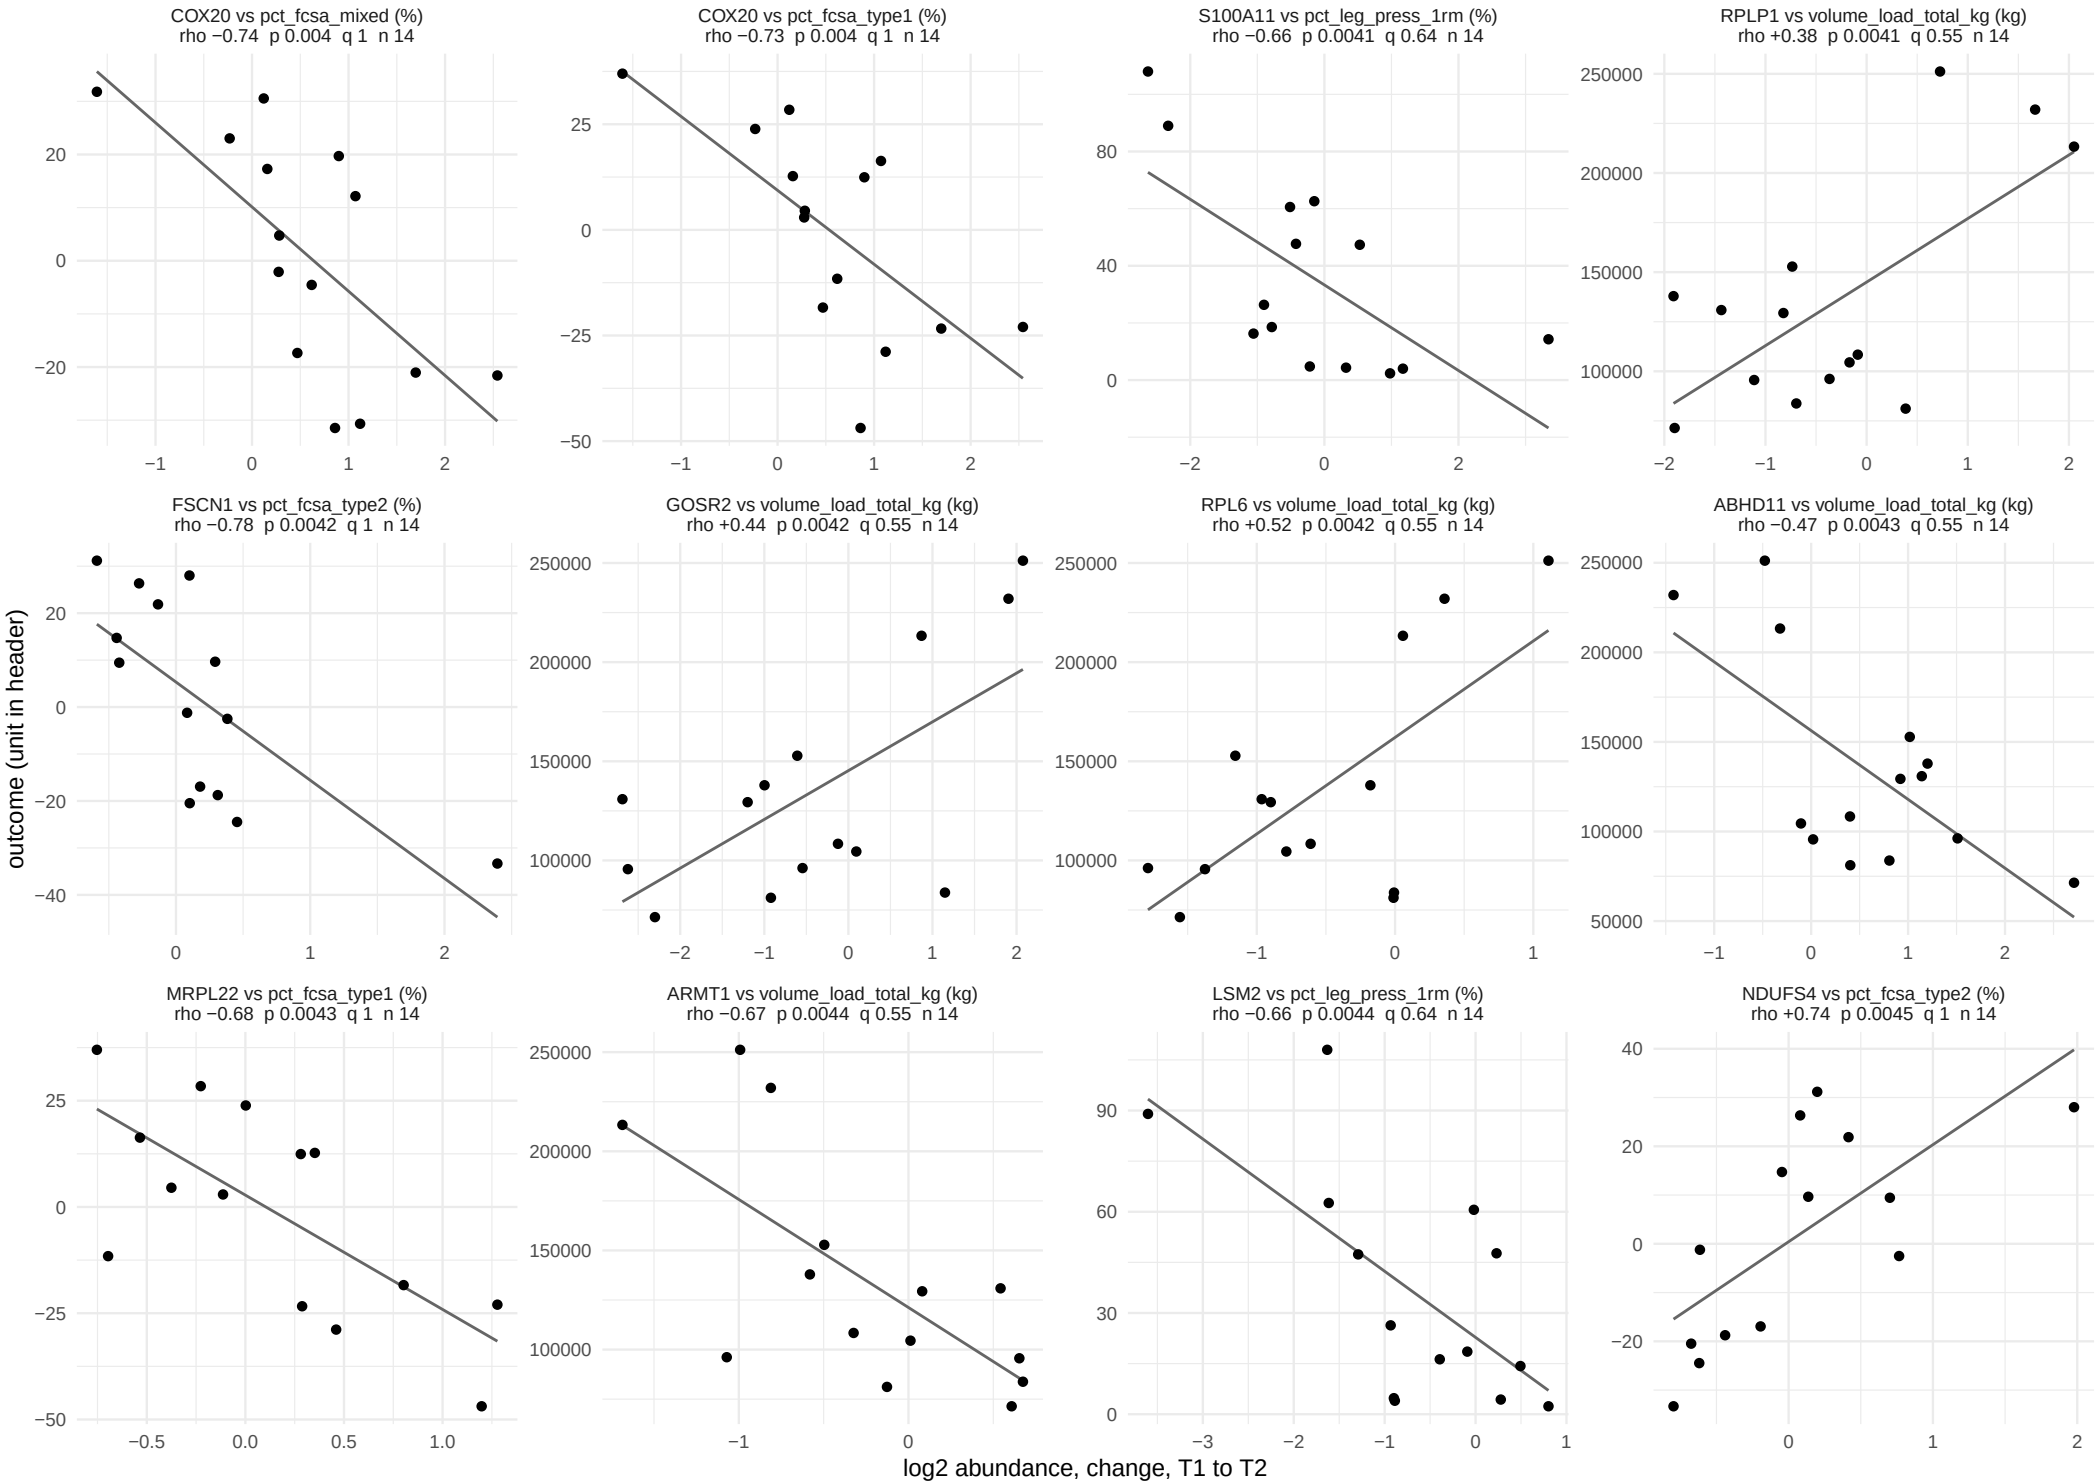

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, training window


605 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 4 of 51.

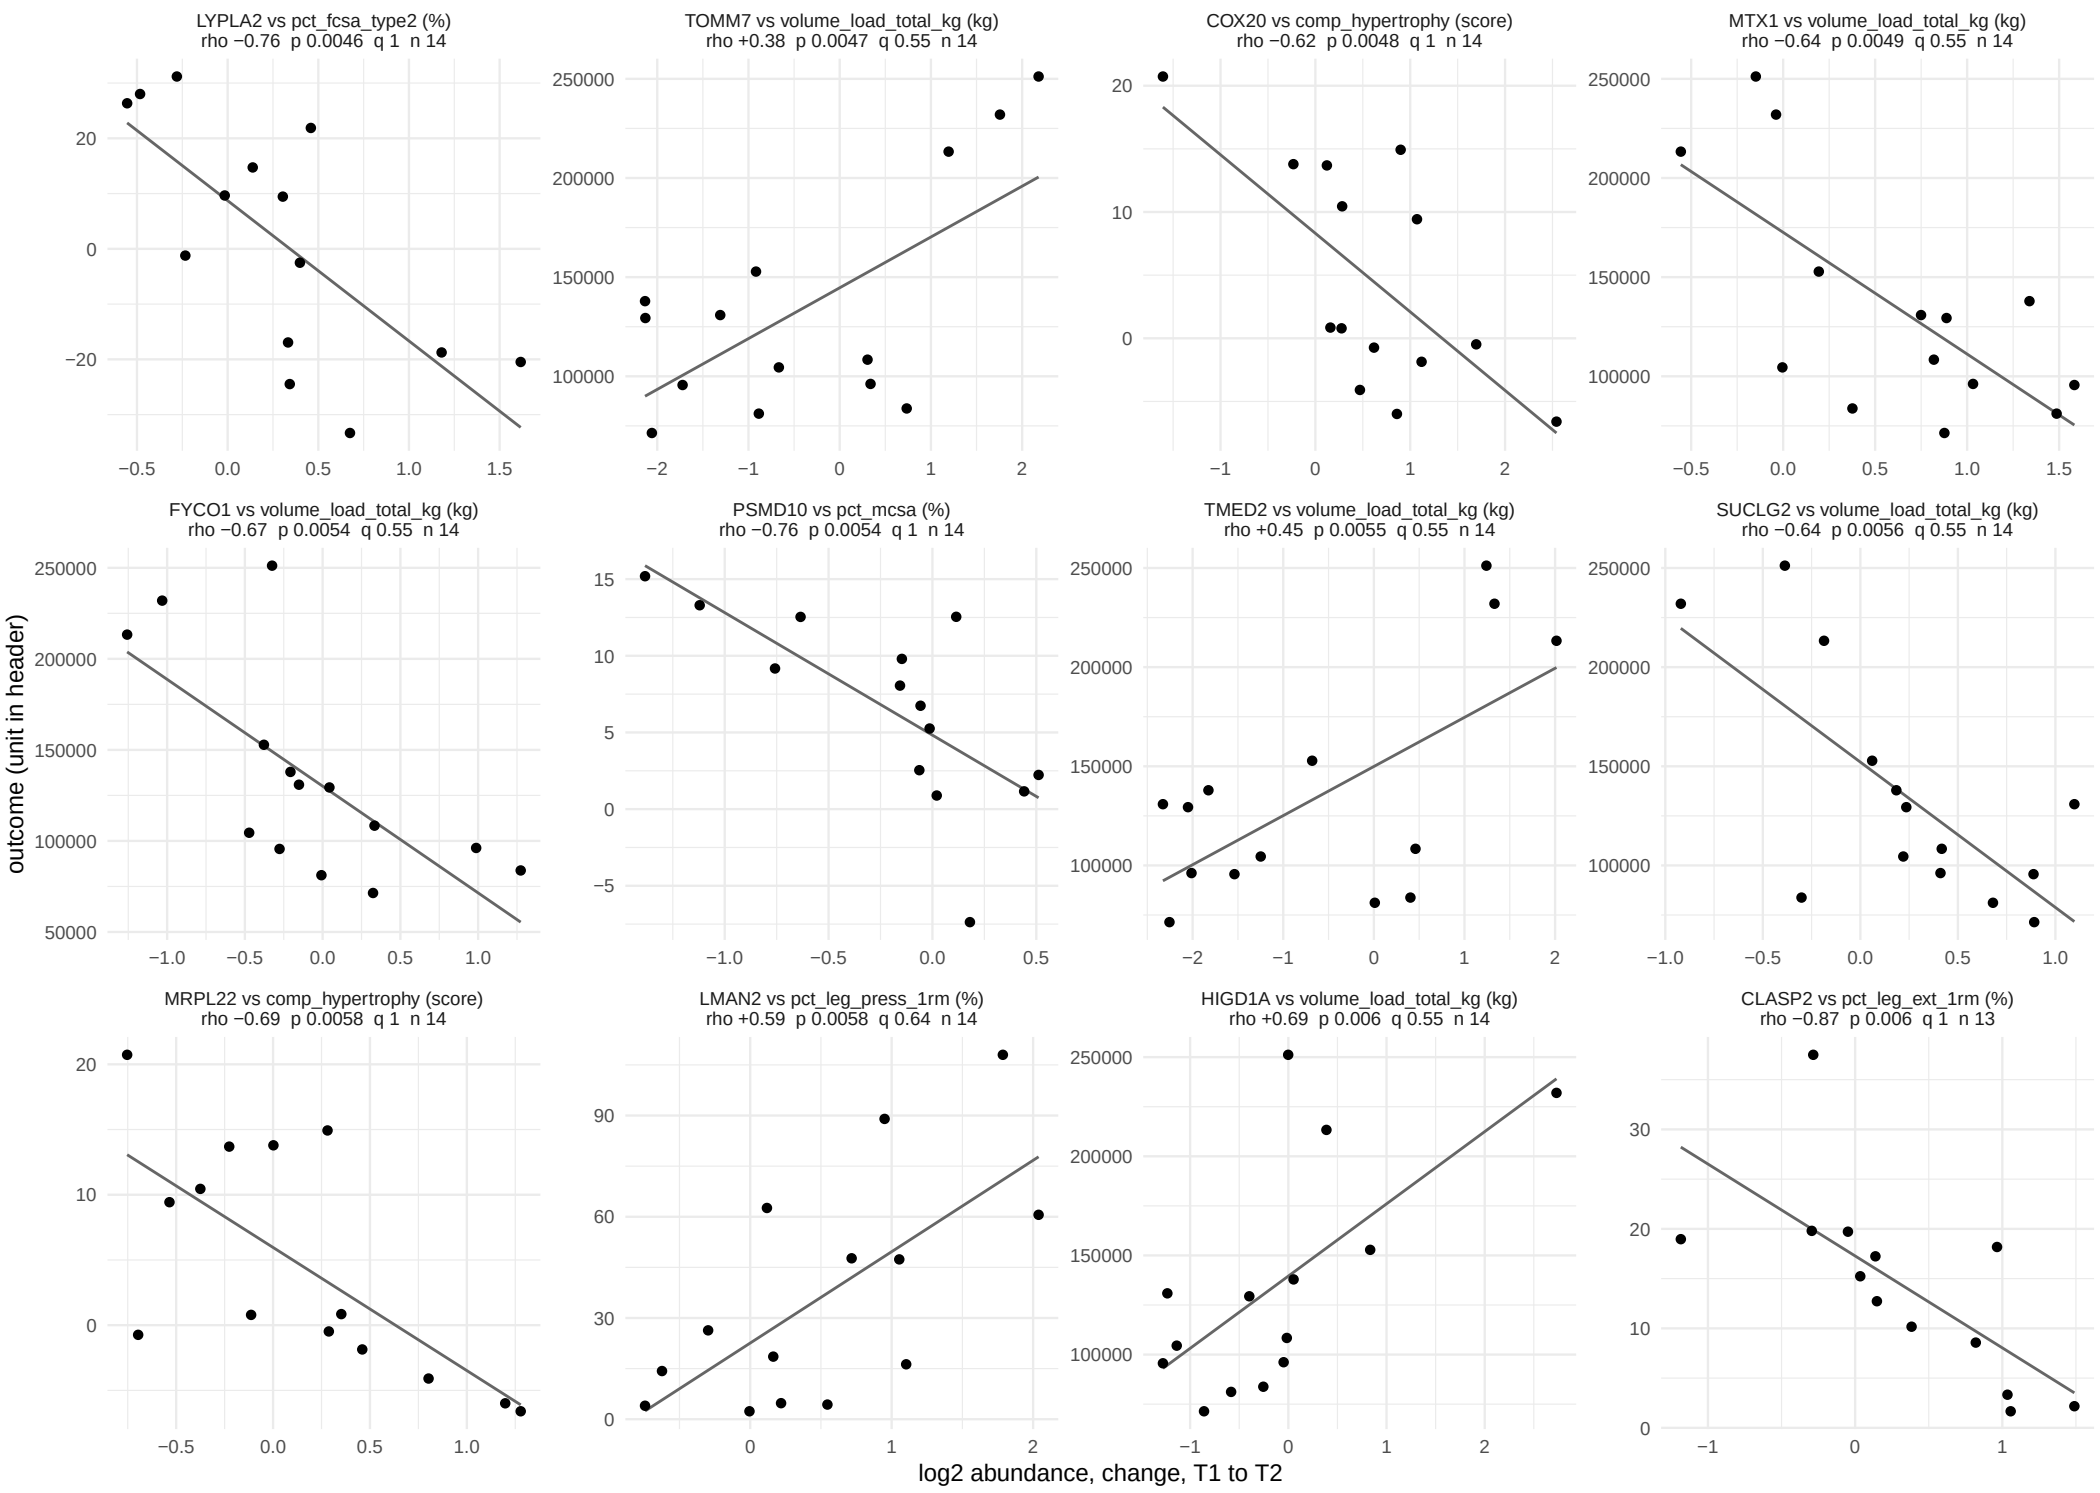

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, training window


605 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 5 of 51.

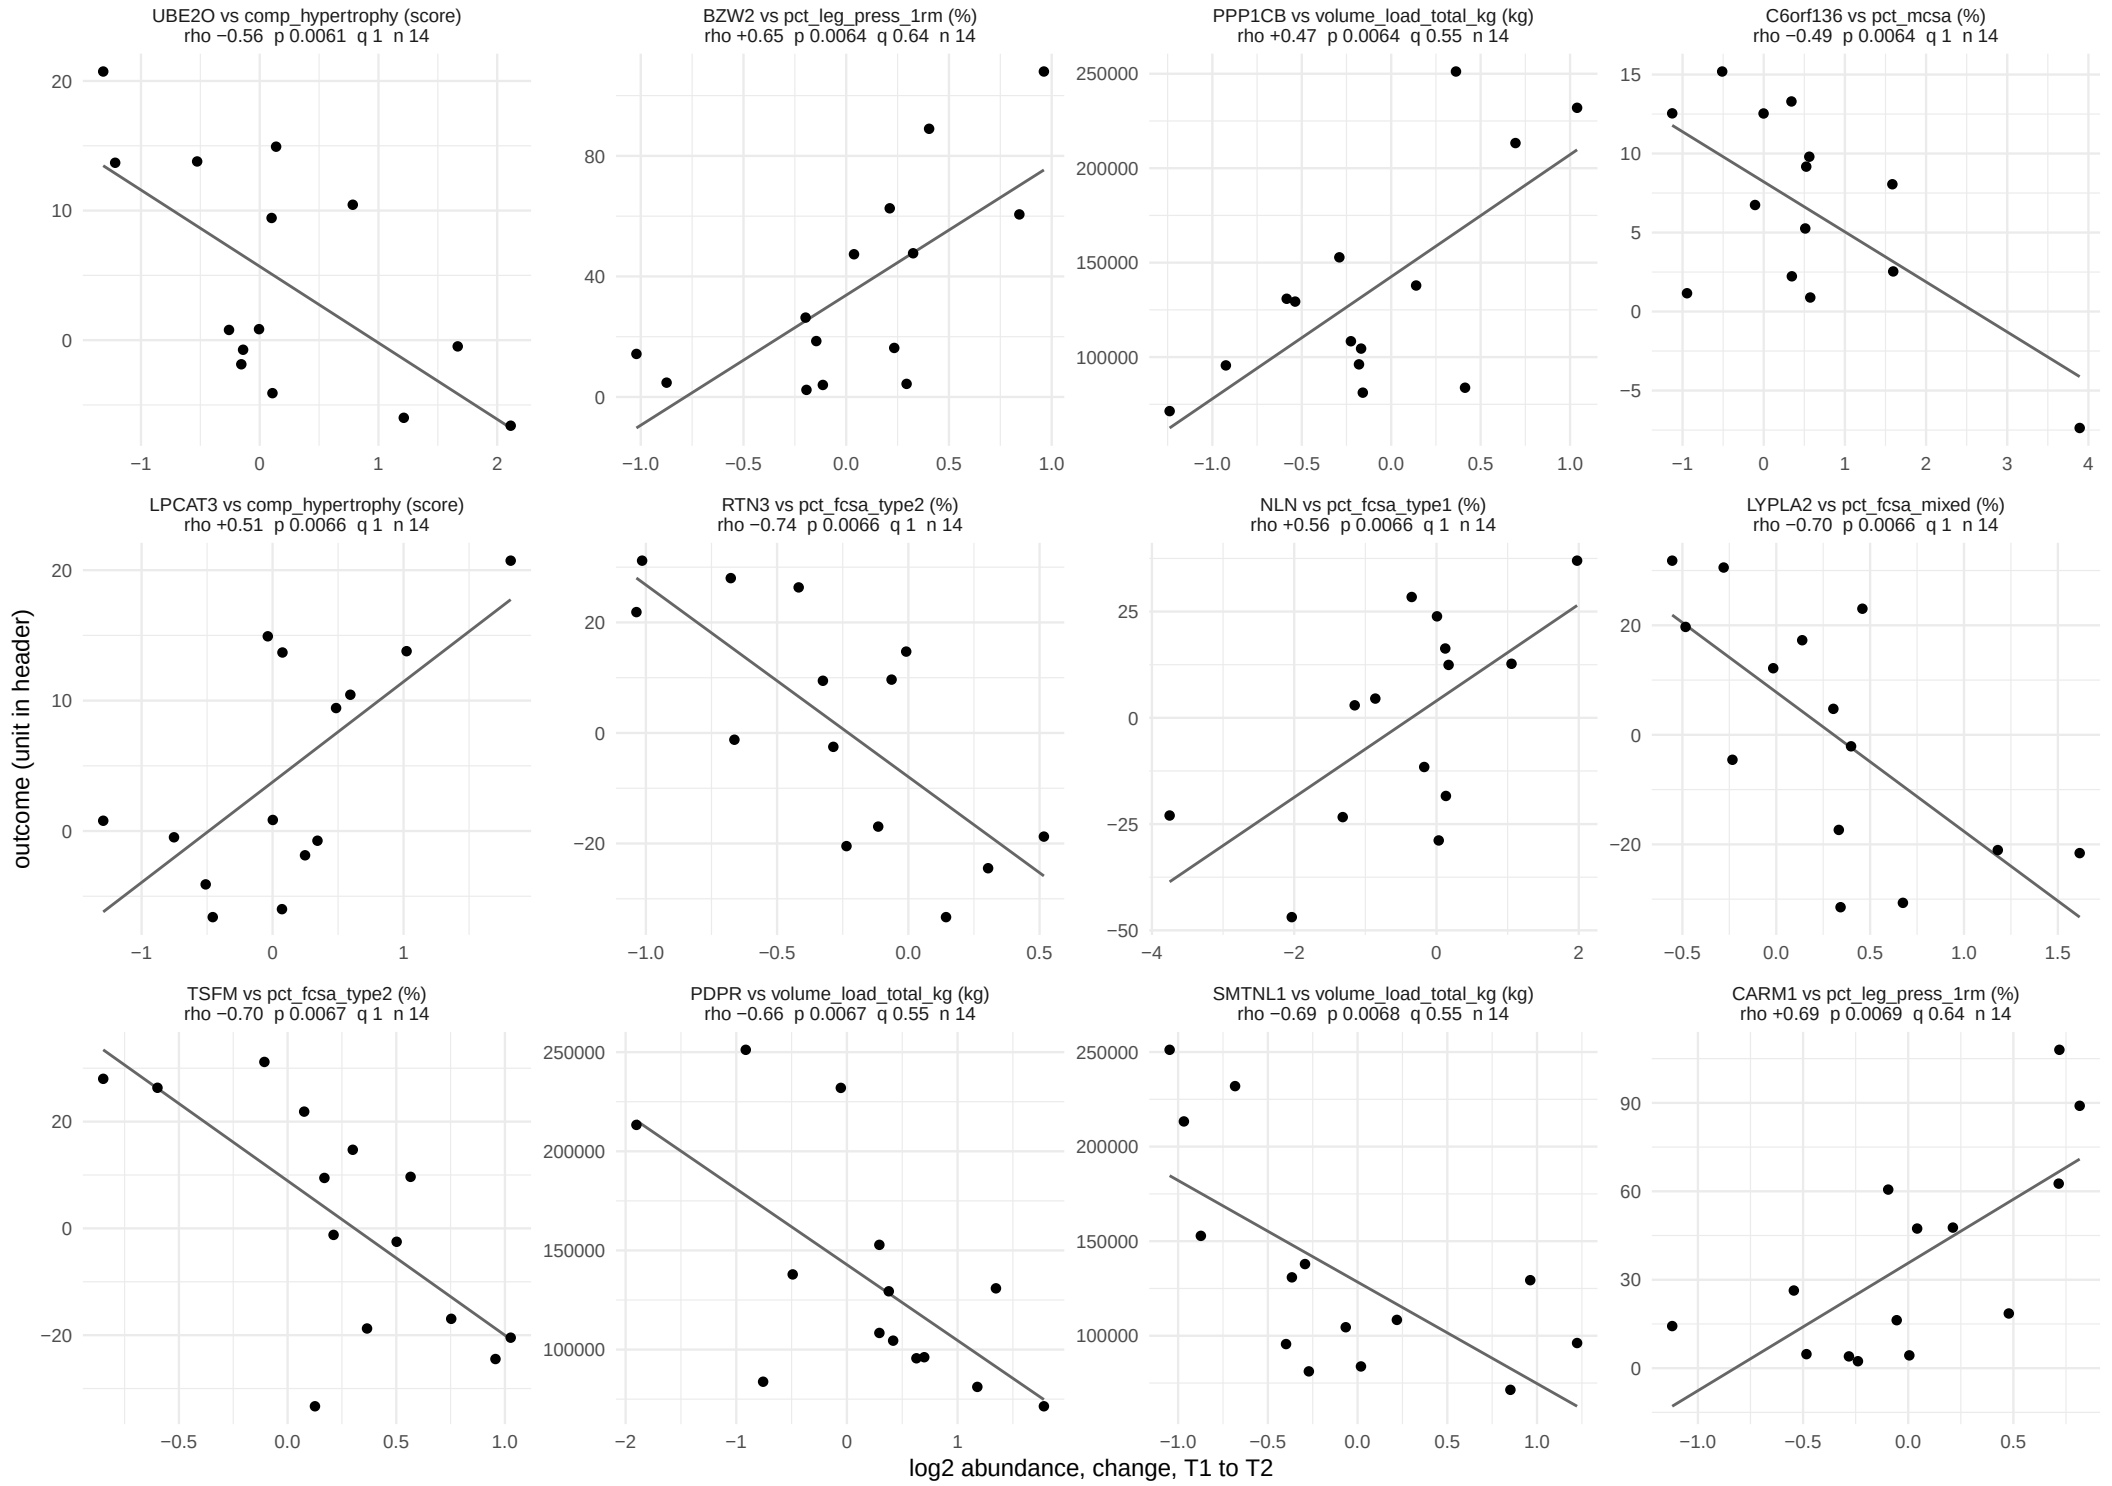

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, training window


605 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 6 of 51.

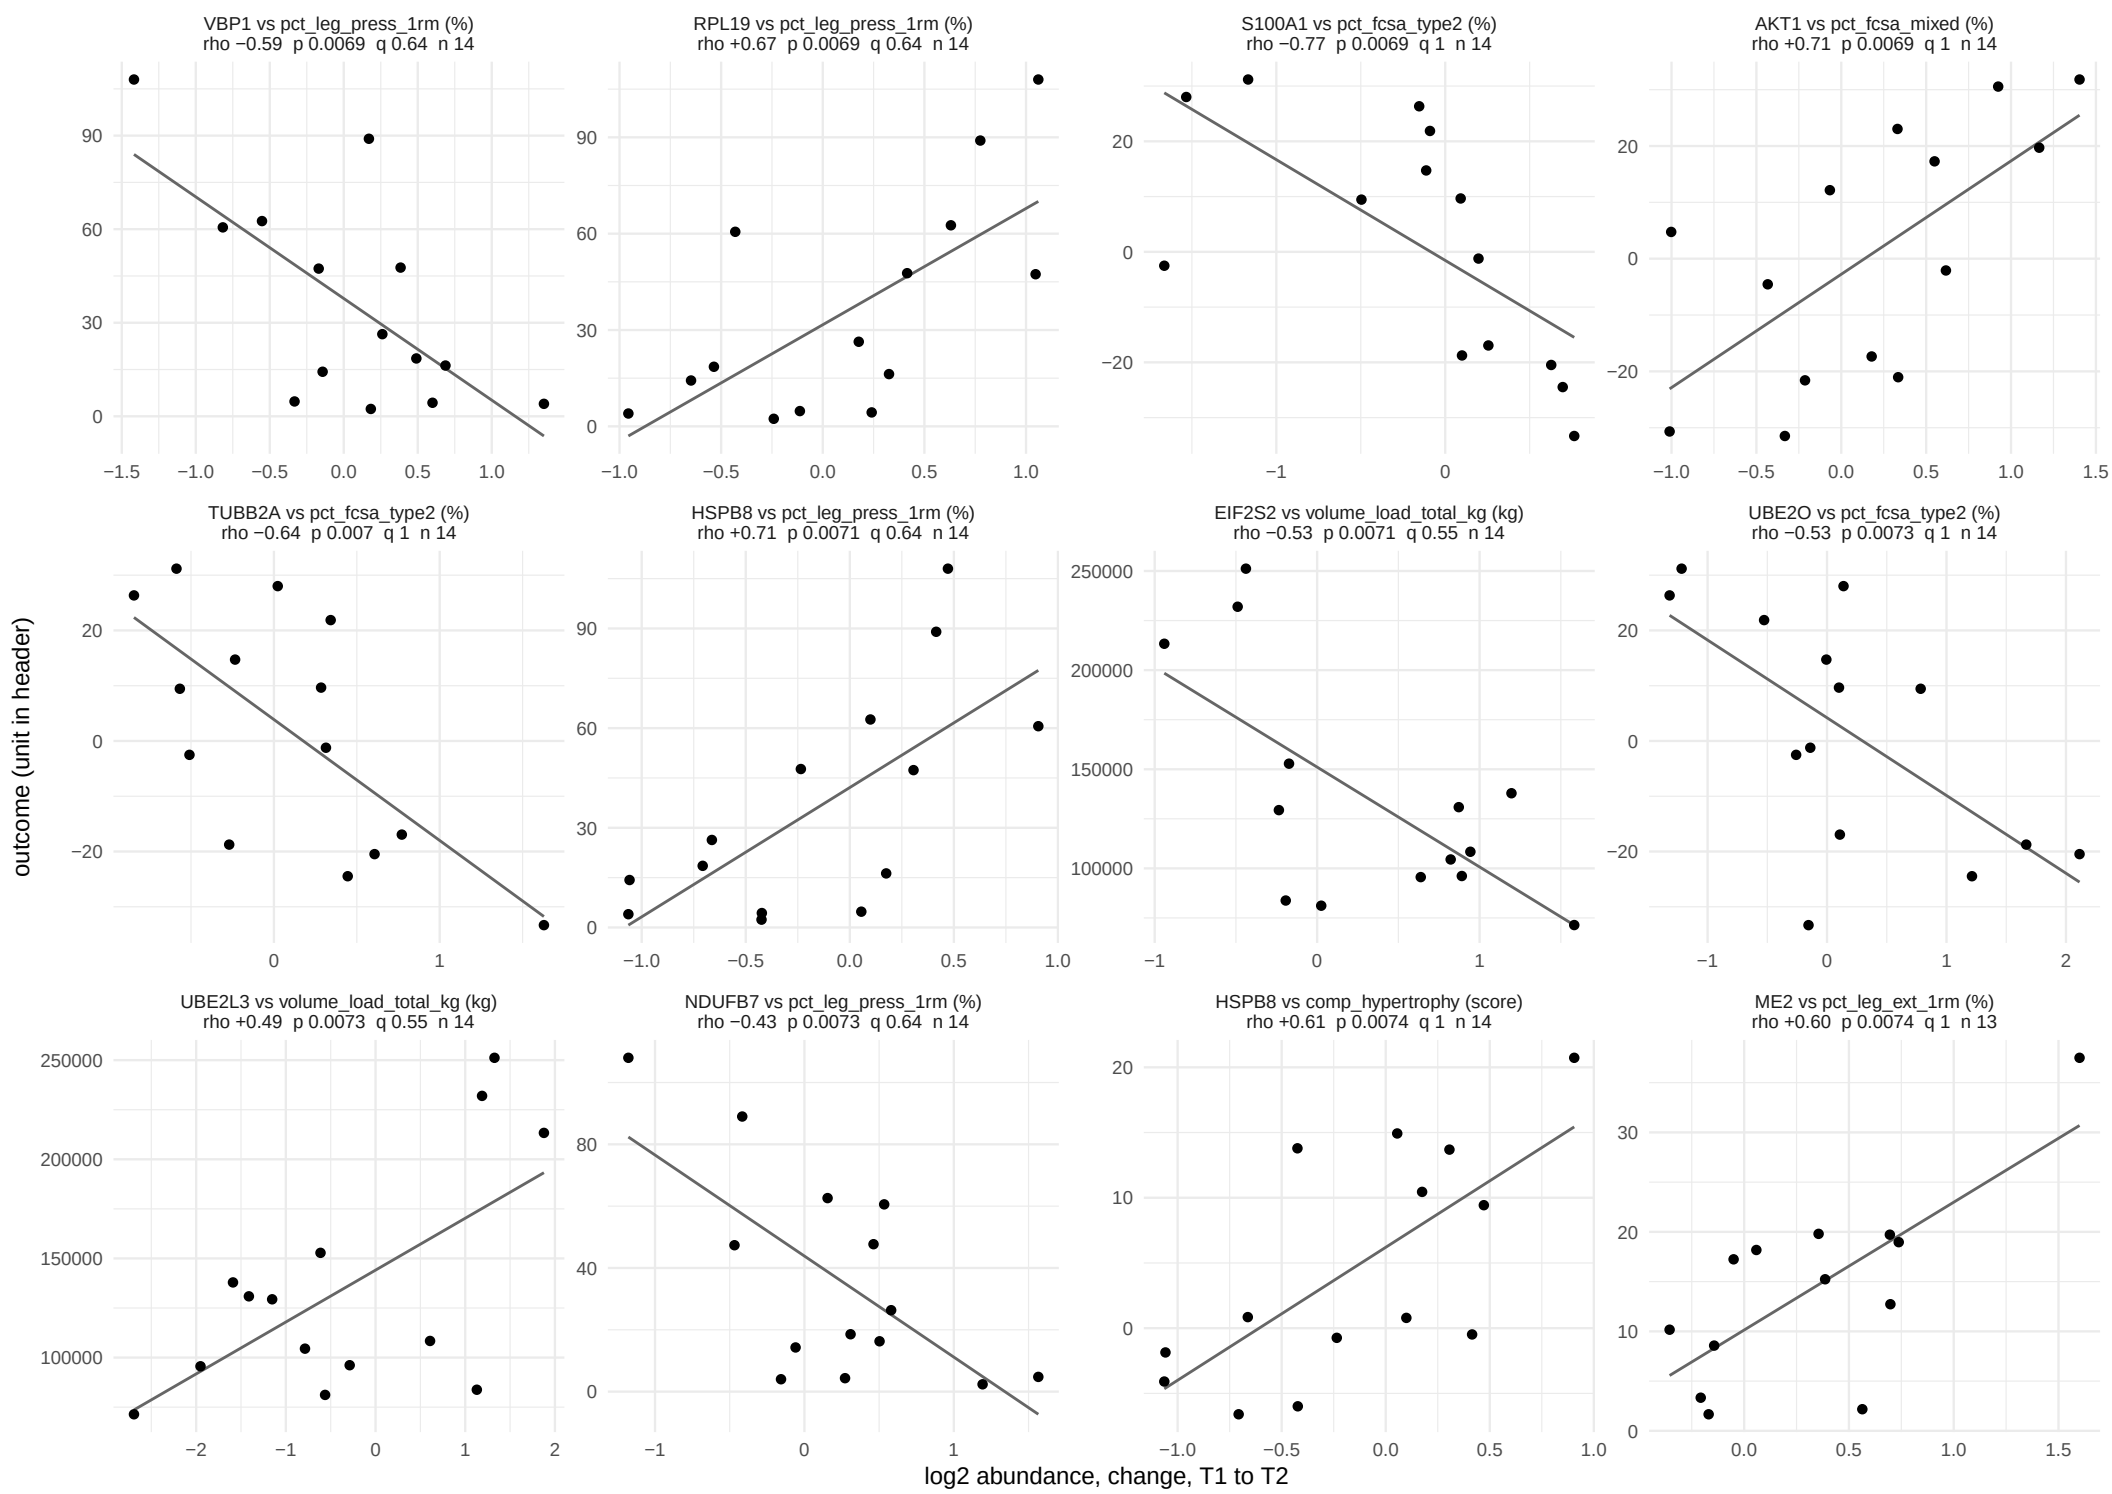

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, training window


605 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 7 of 51.

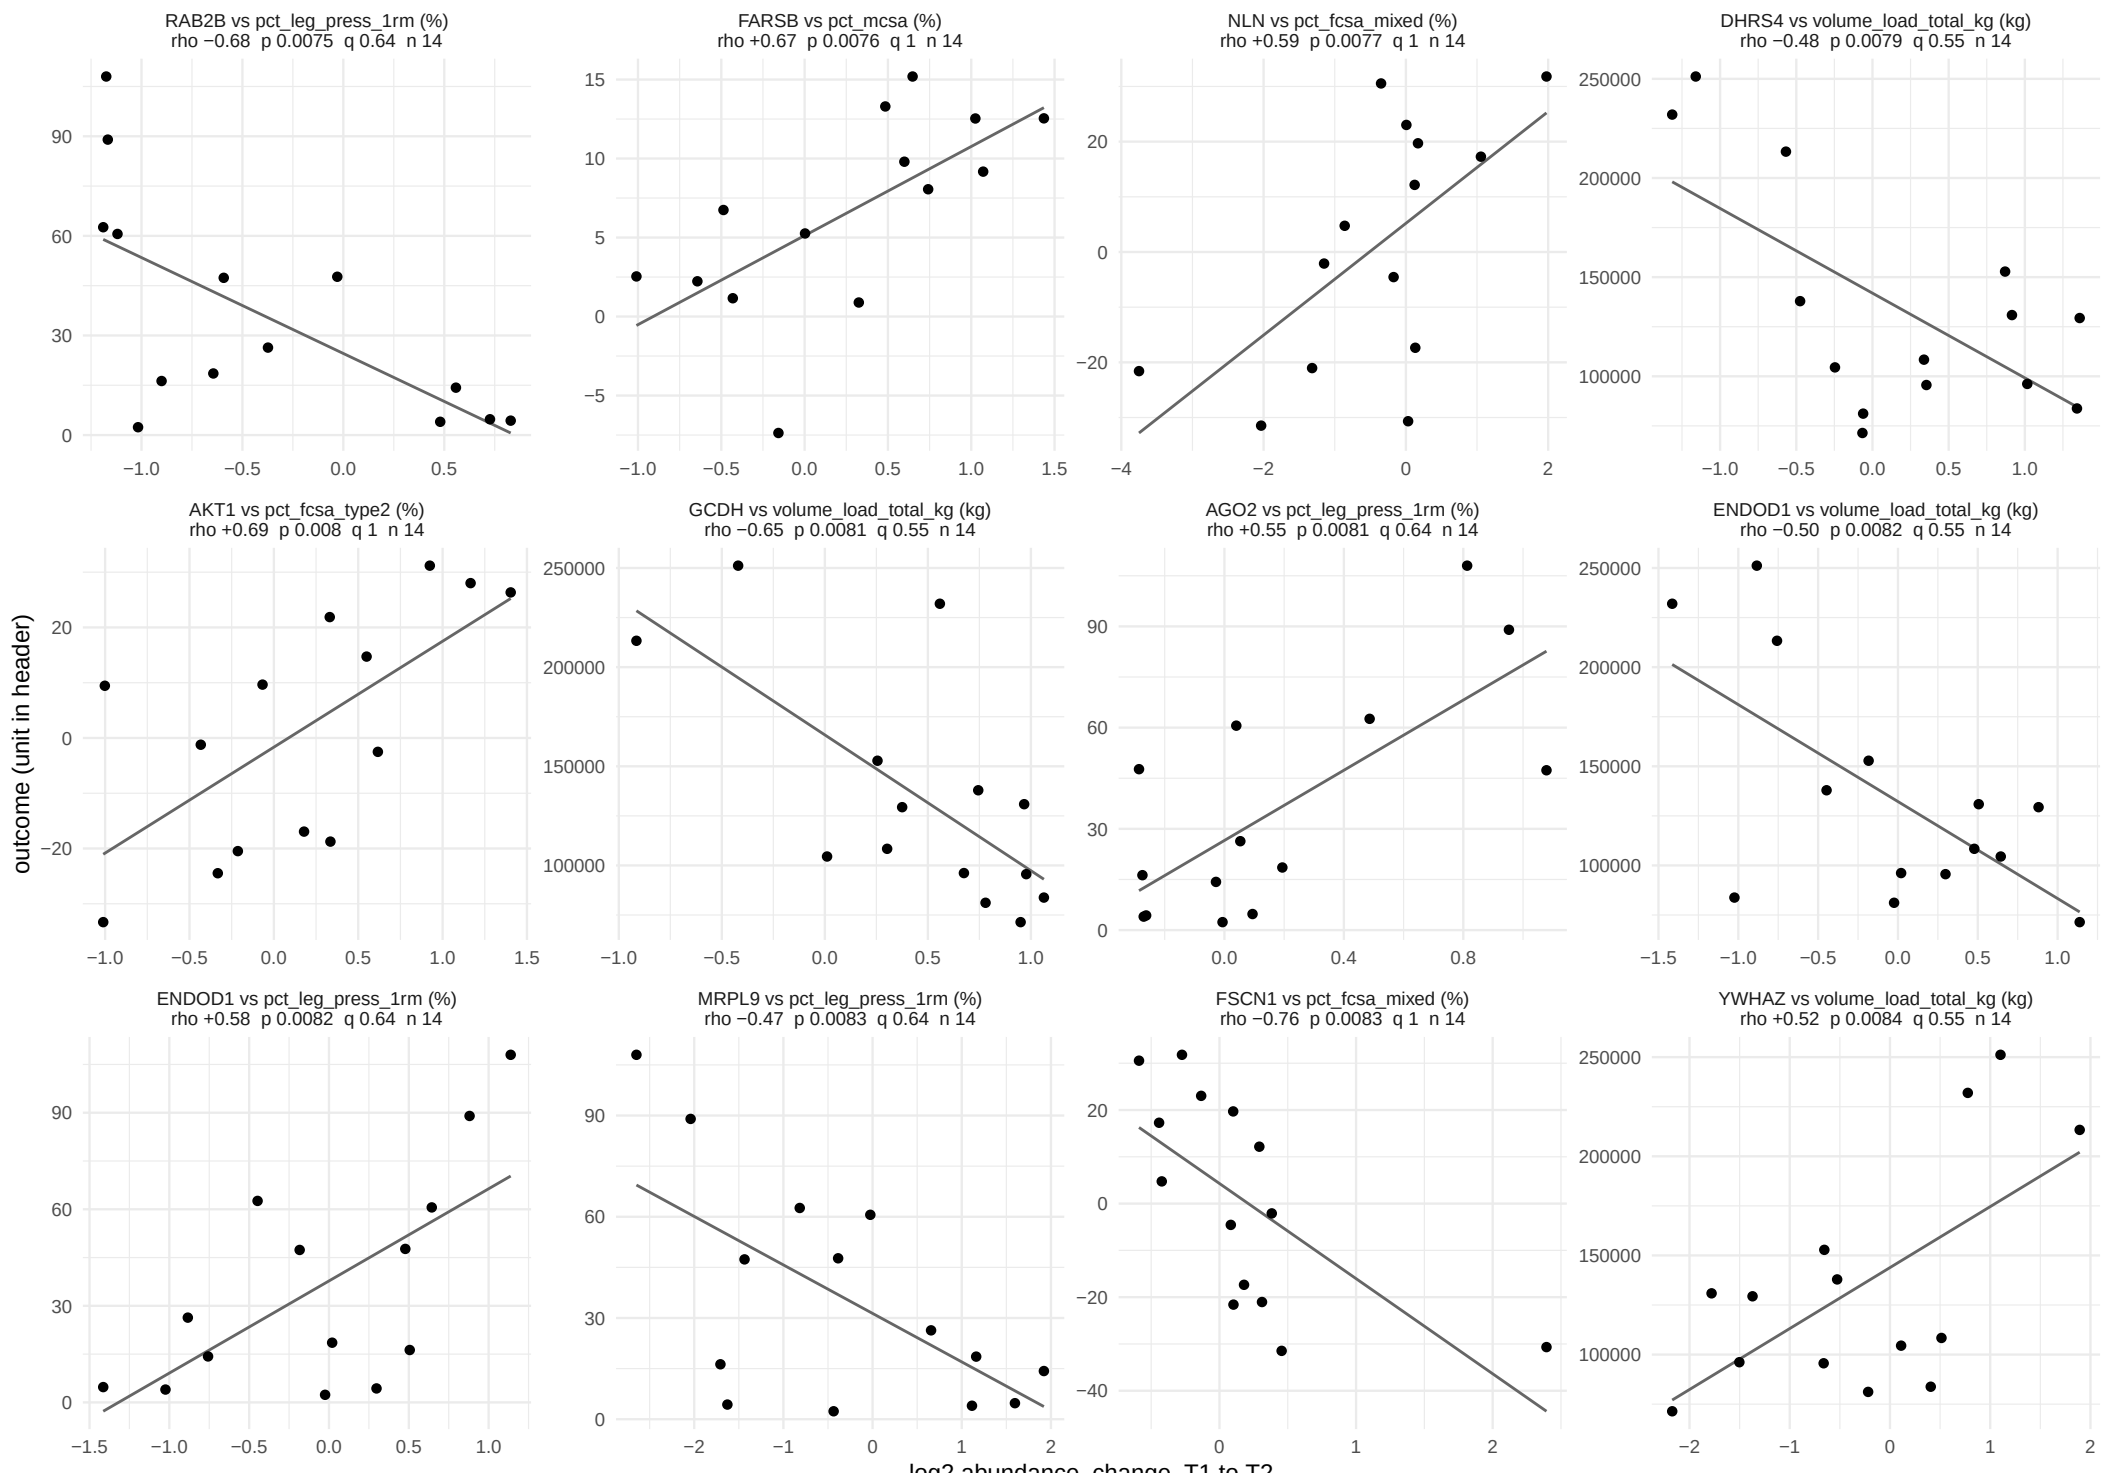

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, training window


605 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 8 of 51.

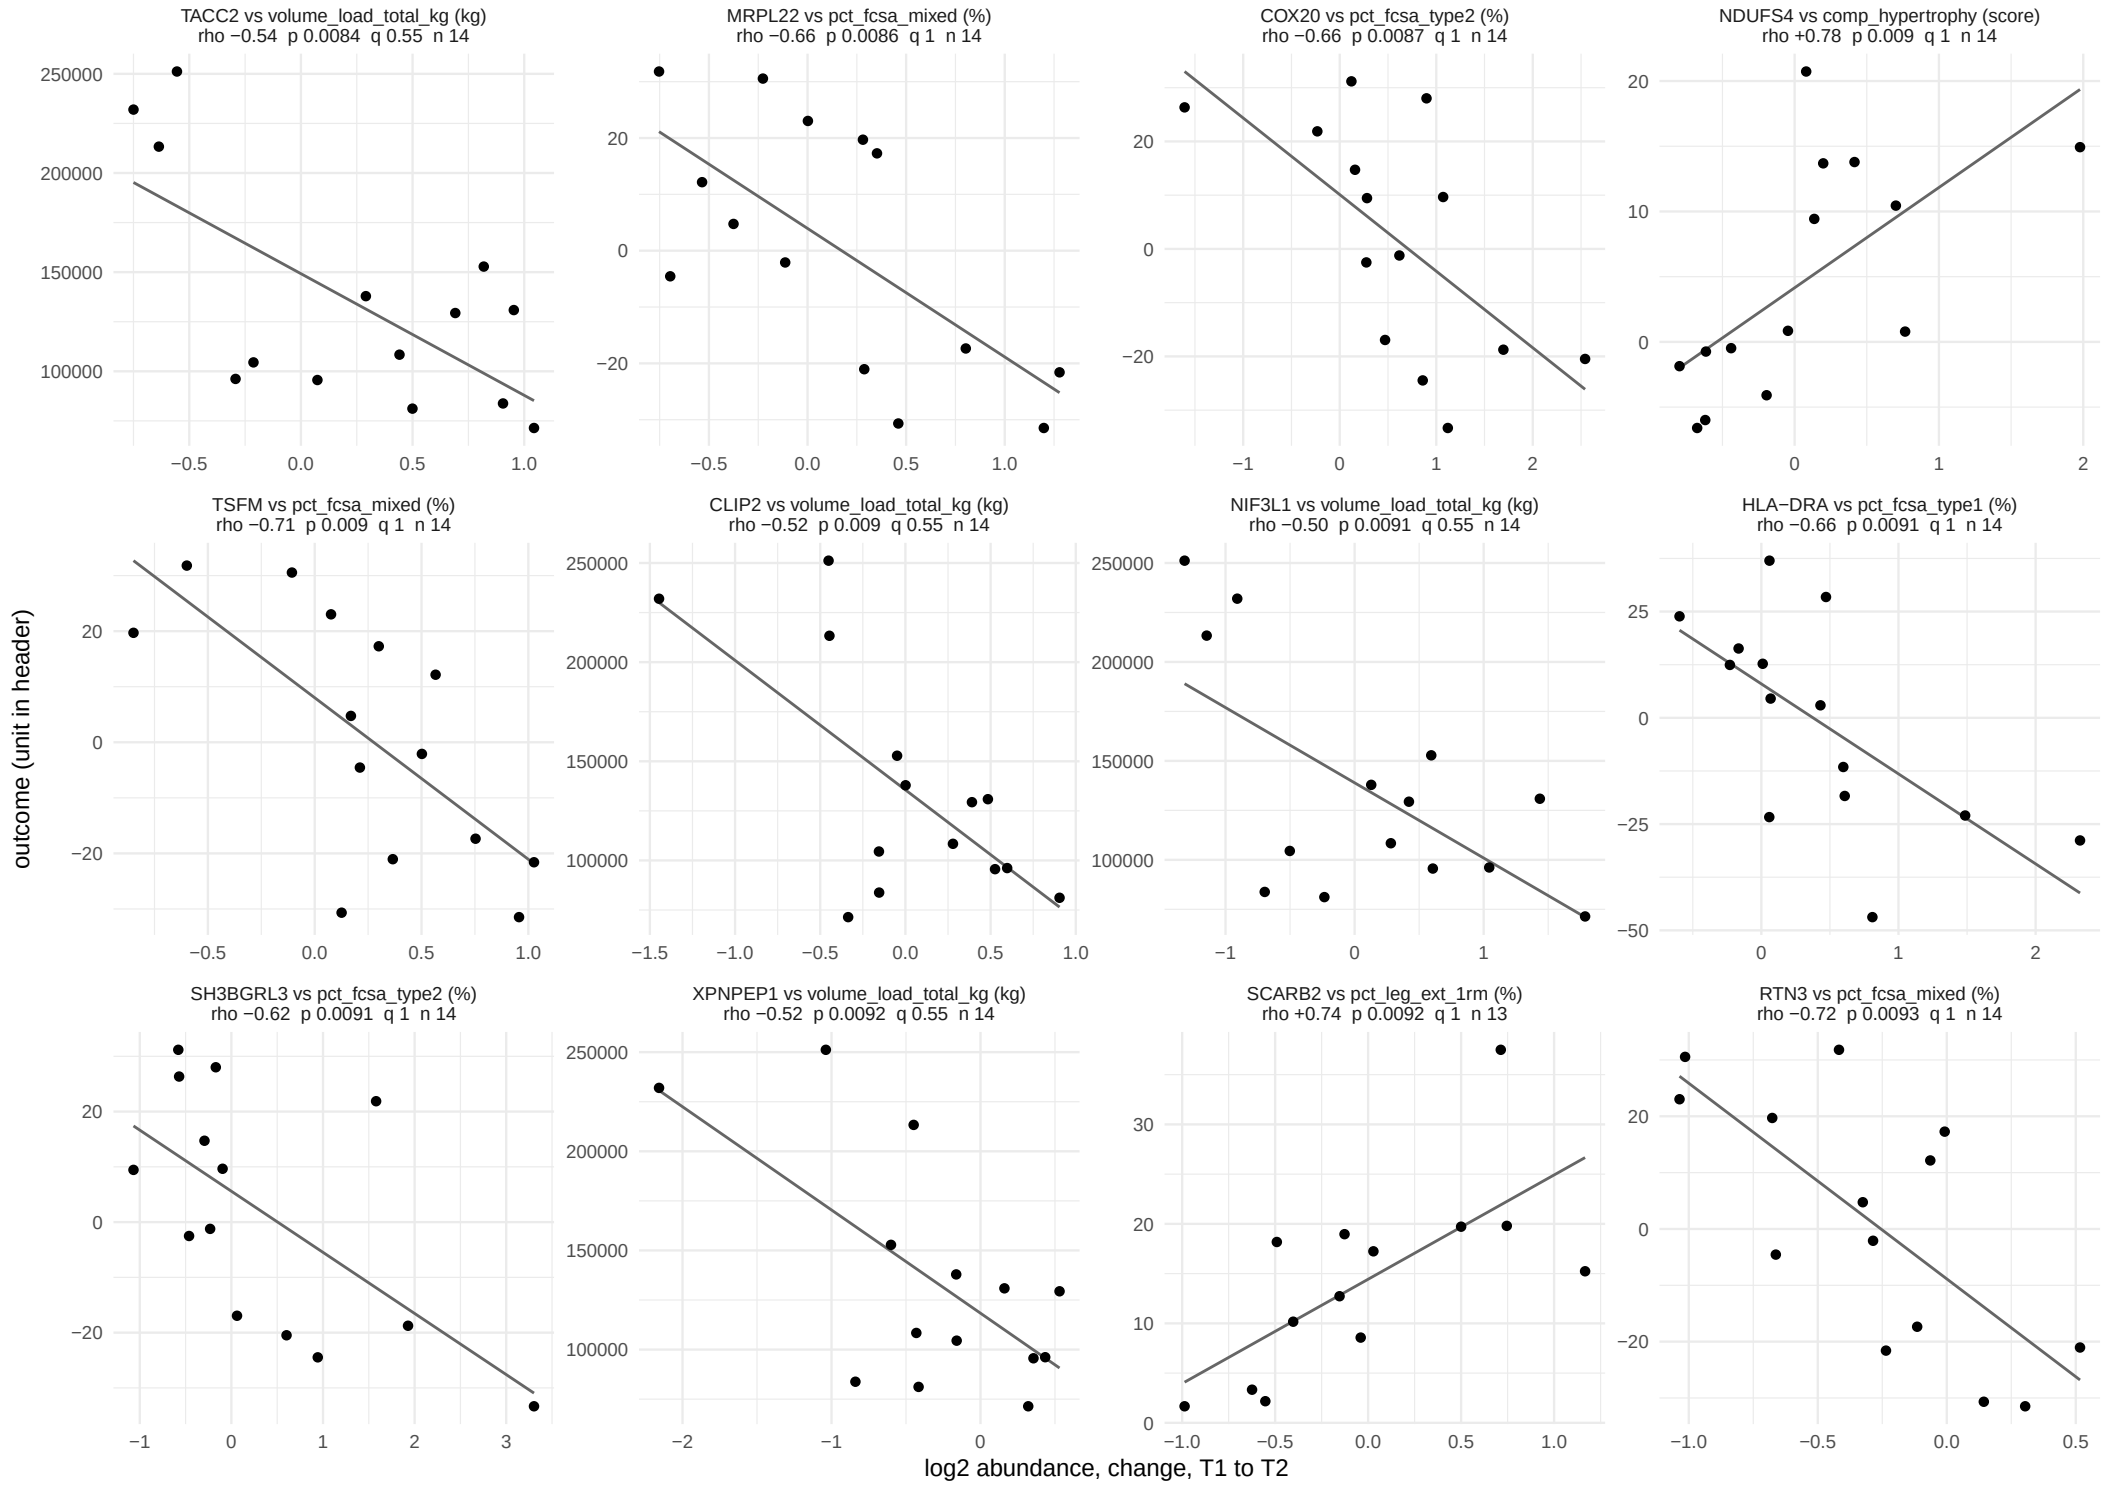

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, training window


605 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 9 of 51.

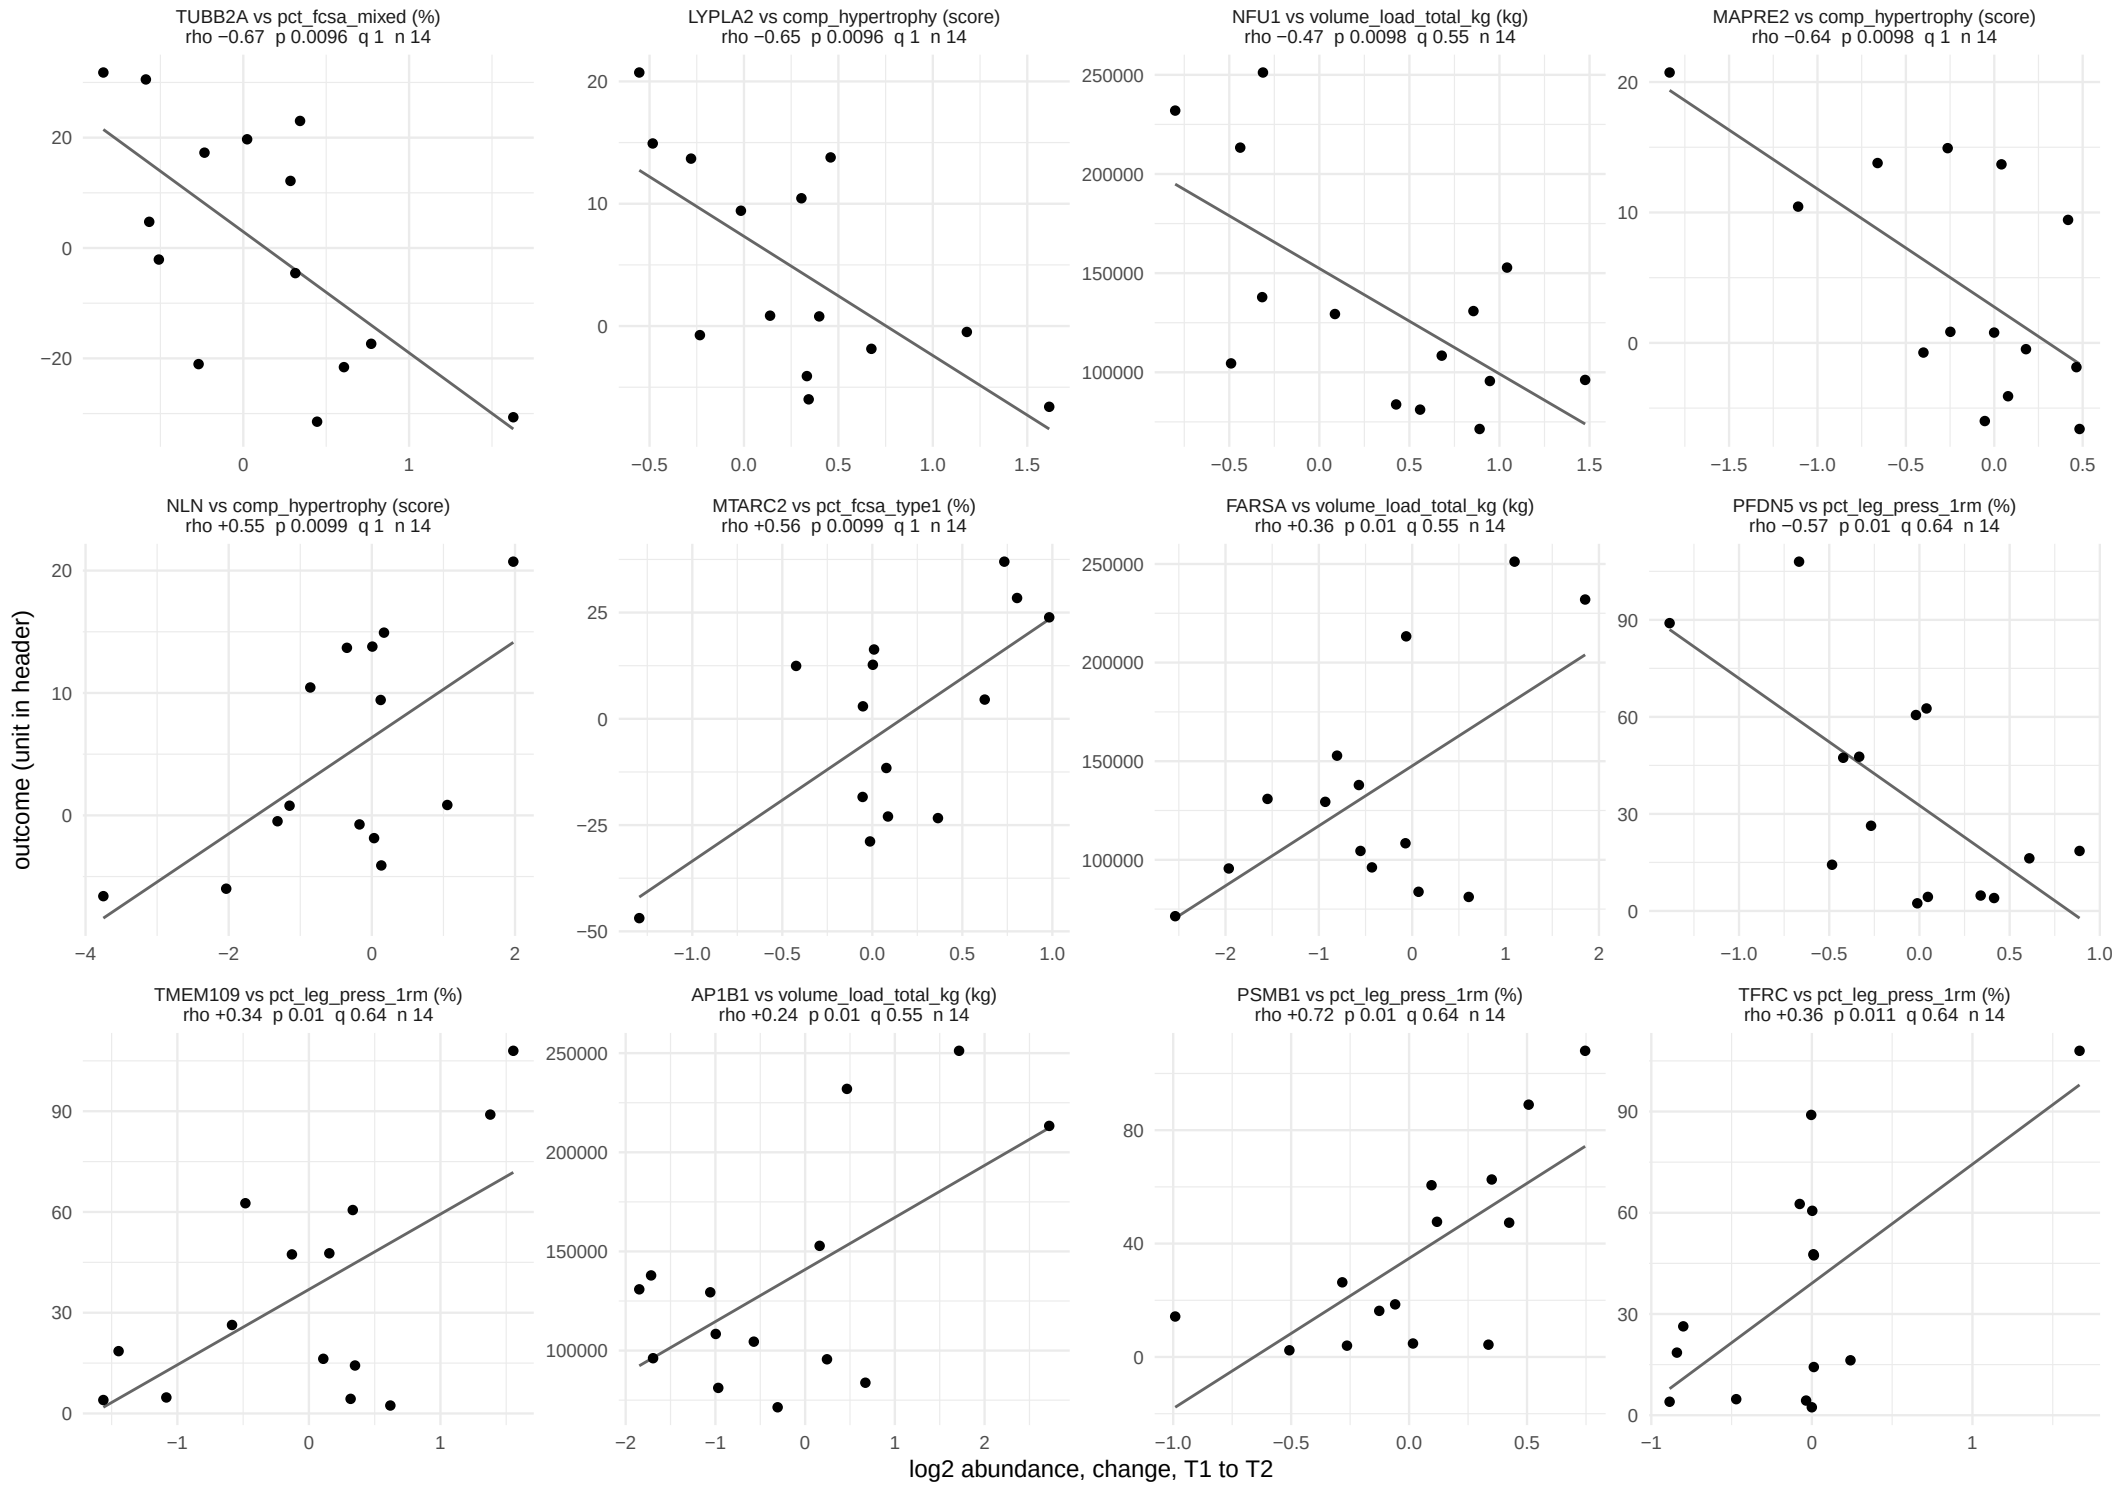

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, training window


605 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 10 of 51.

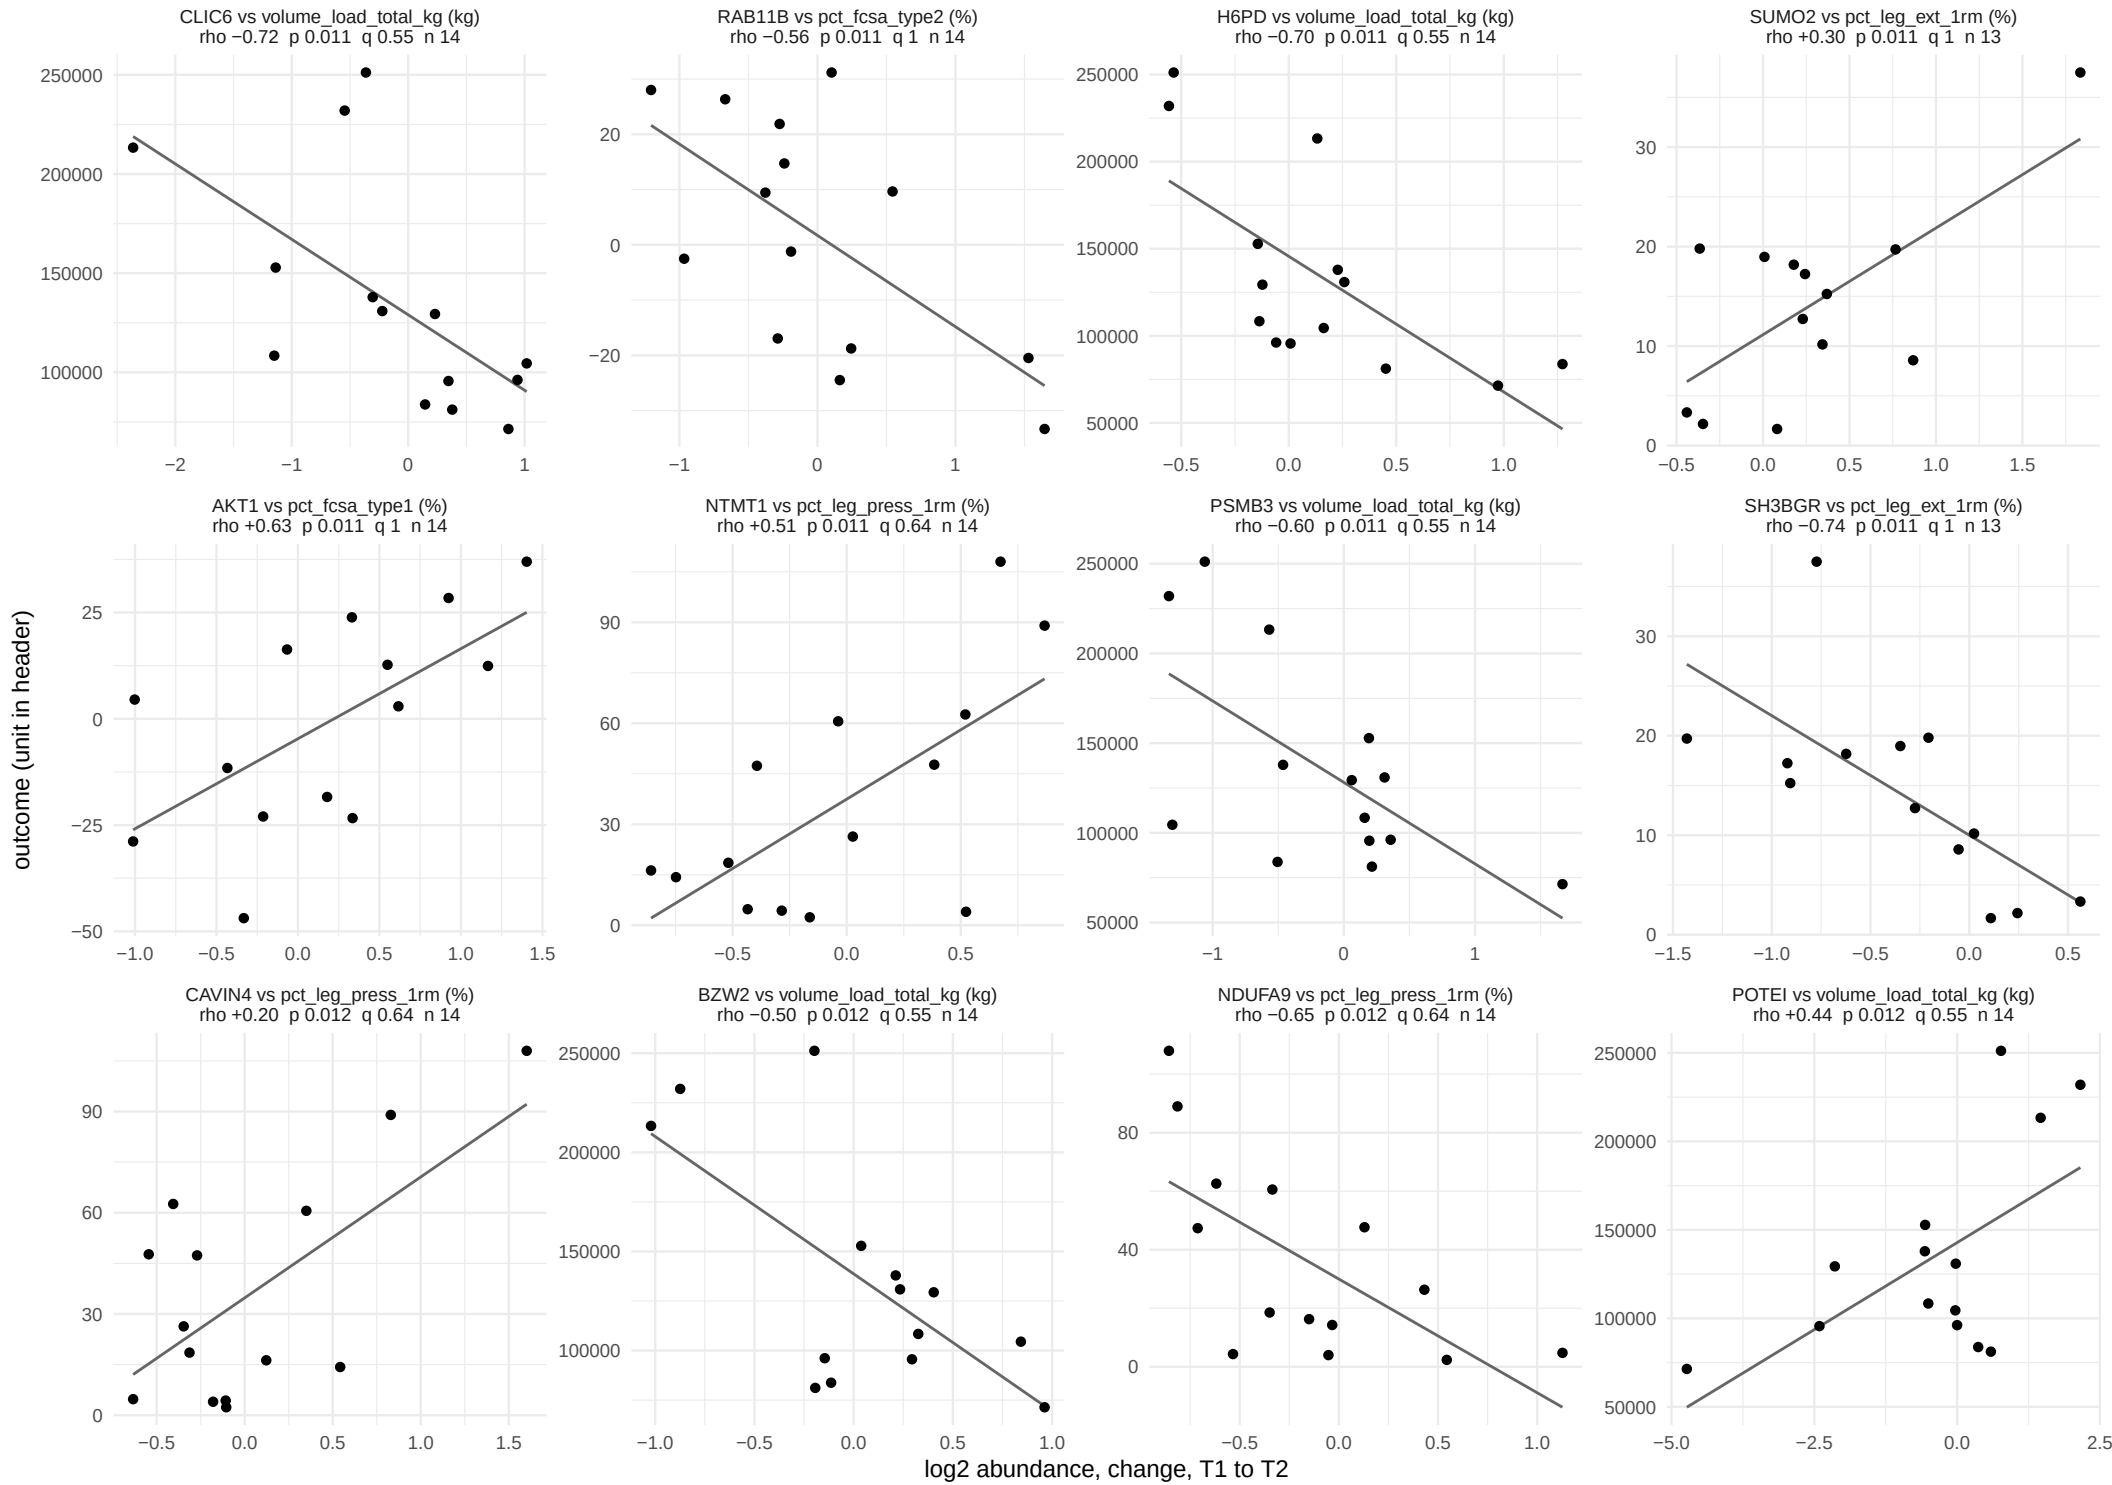

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, training window


605 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 11 of 51.

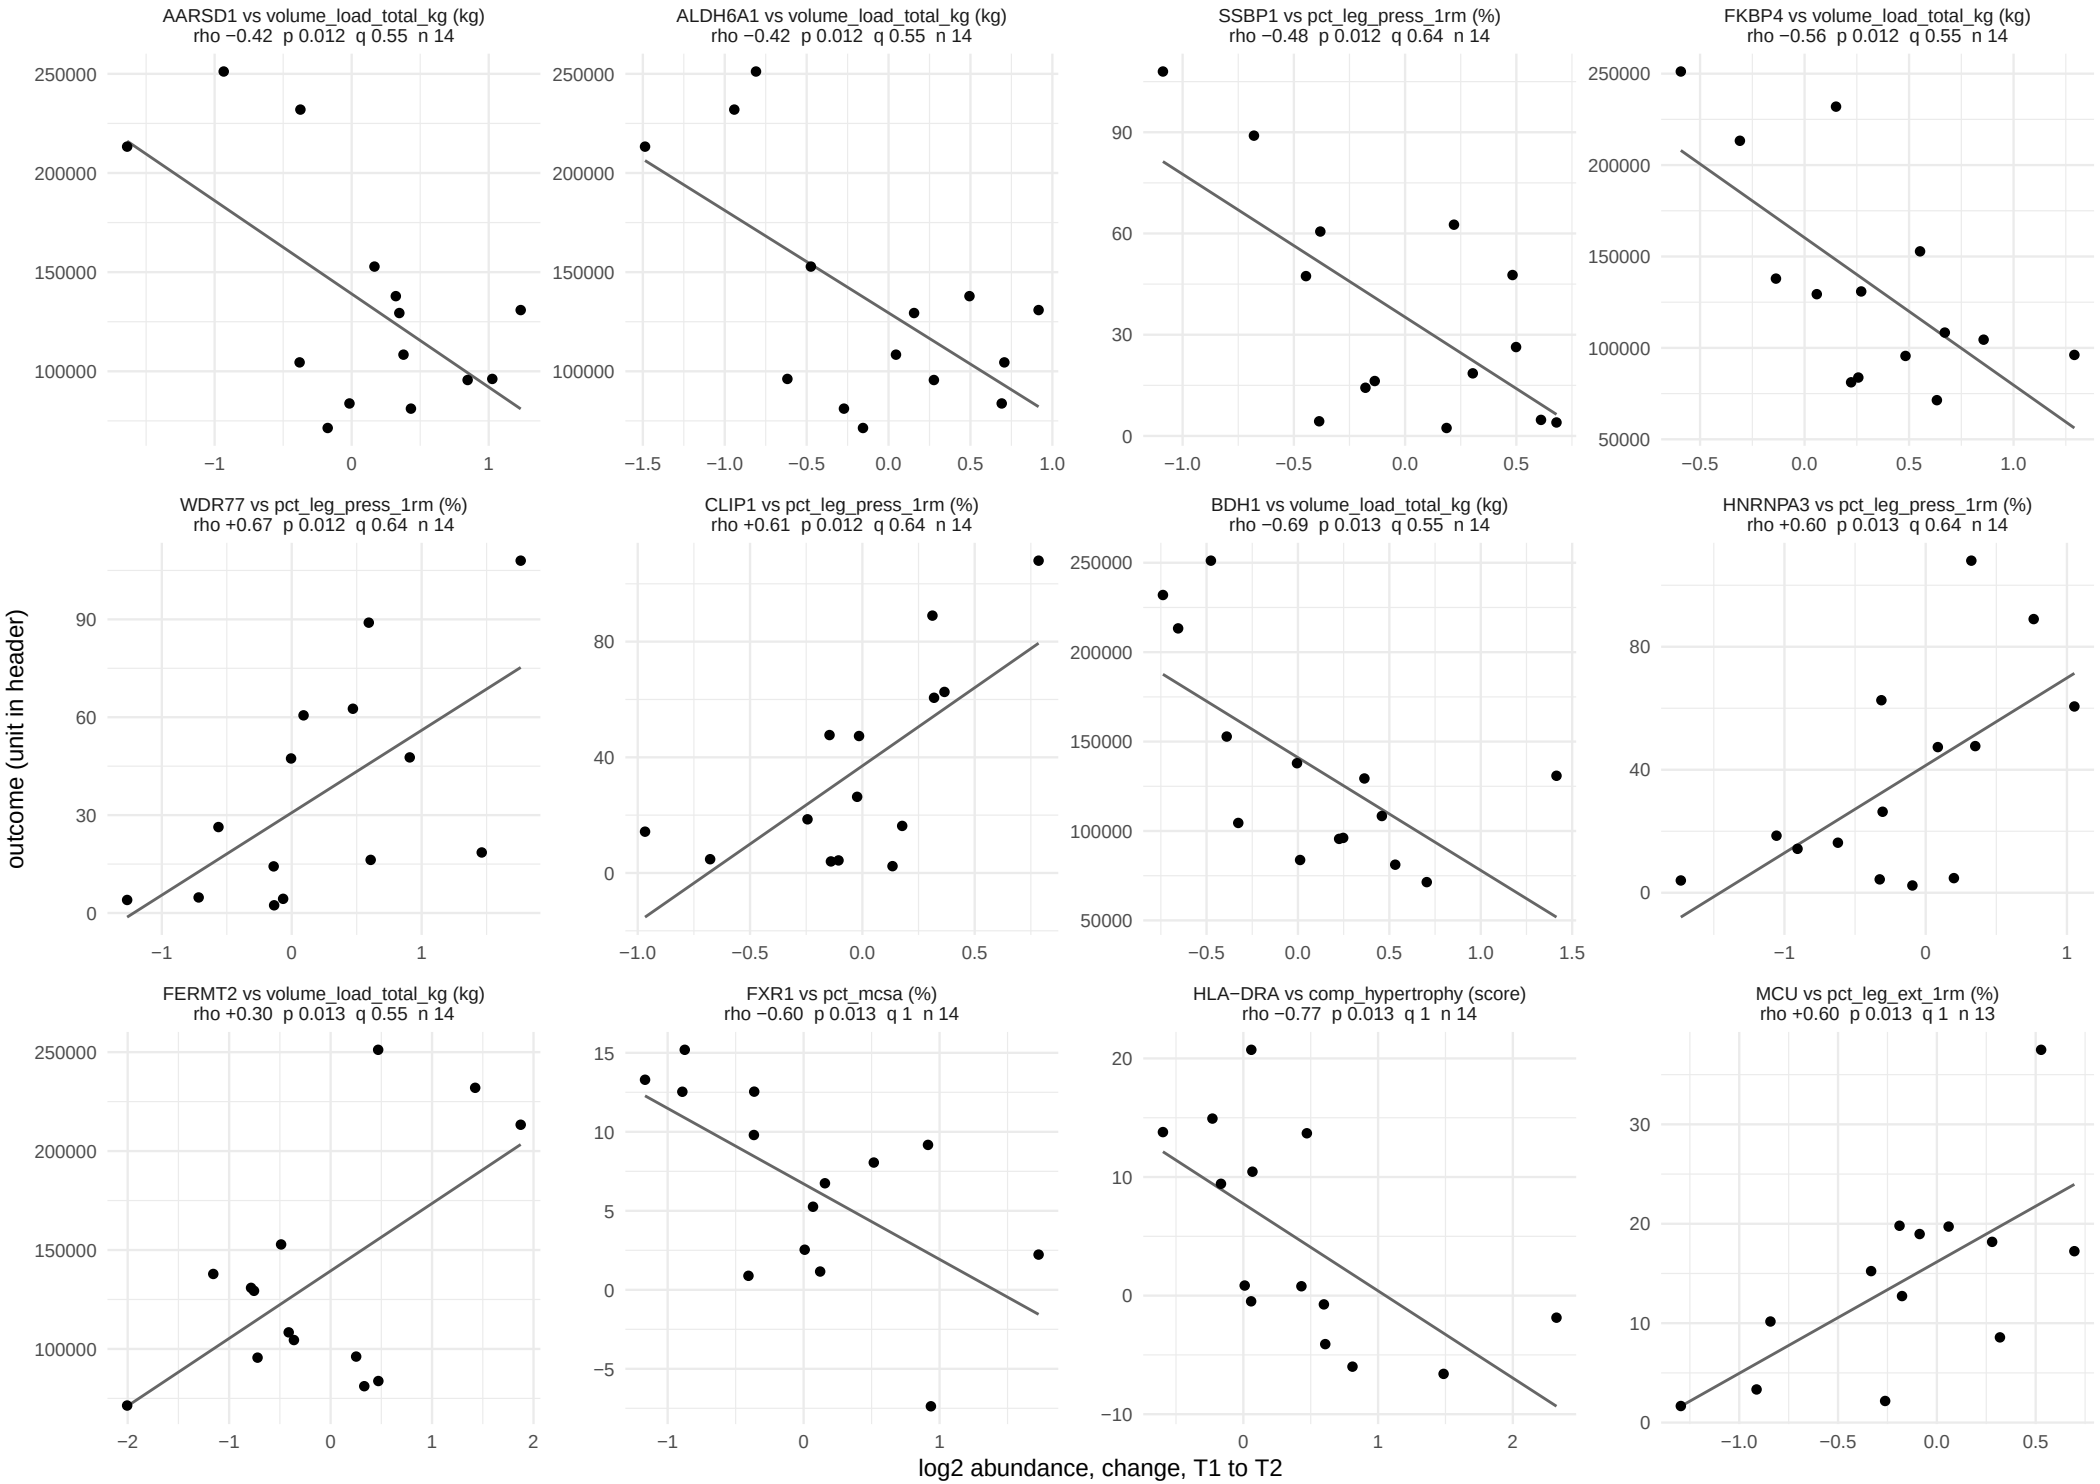

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, training window


605 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 12 of 51.

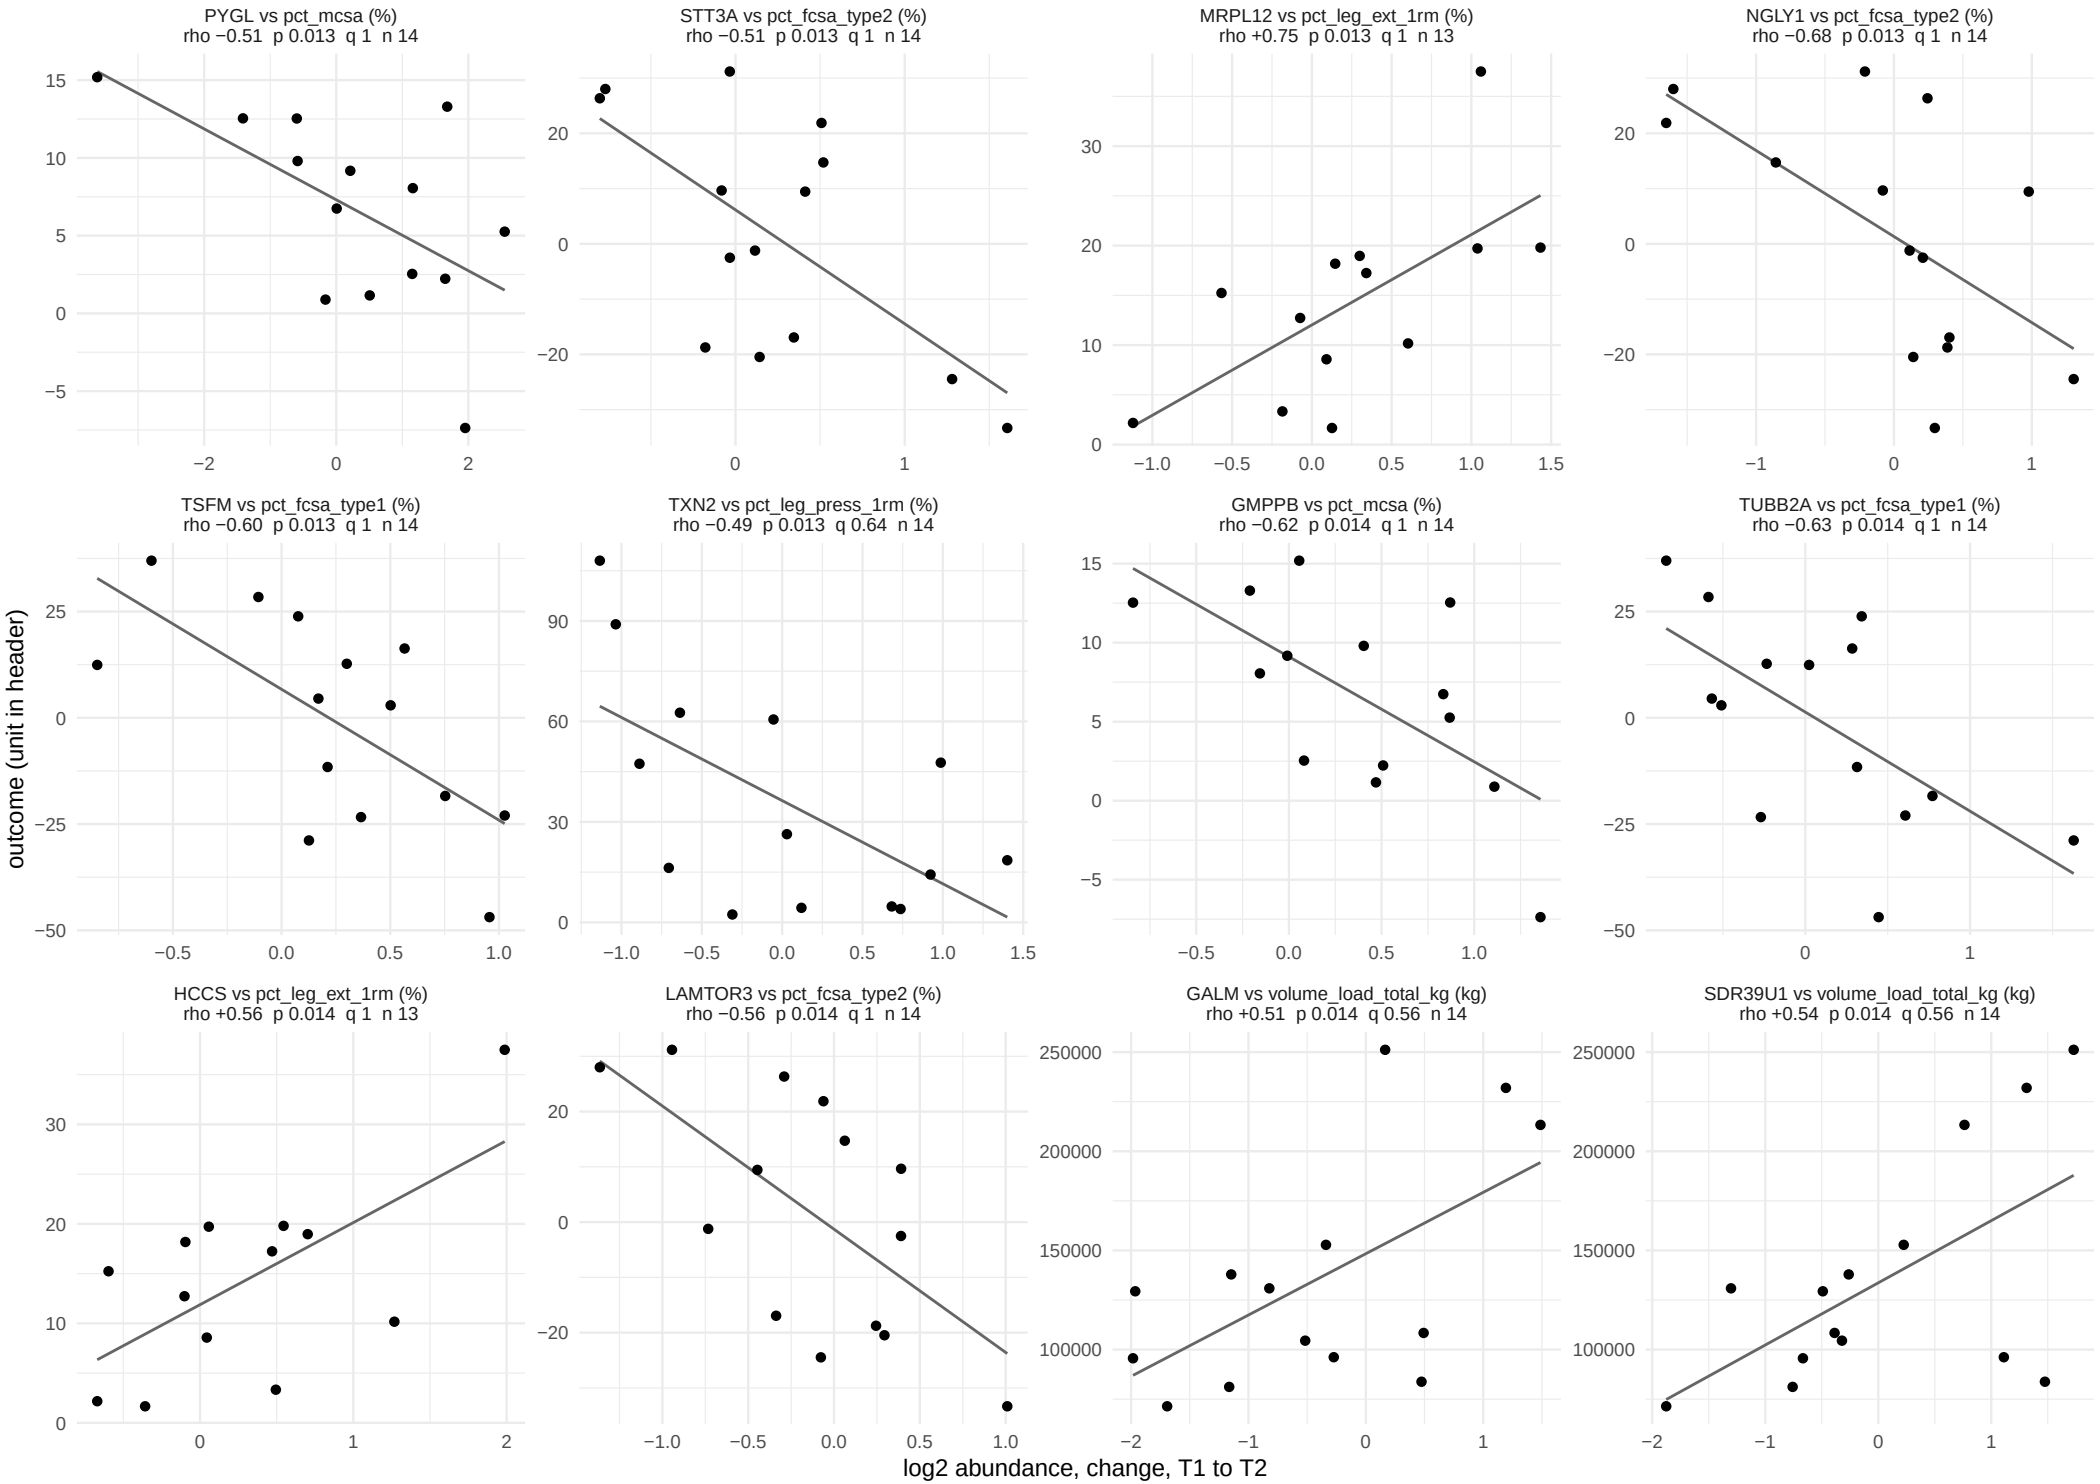

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, training window


605 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 13 of 51.

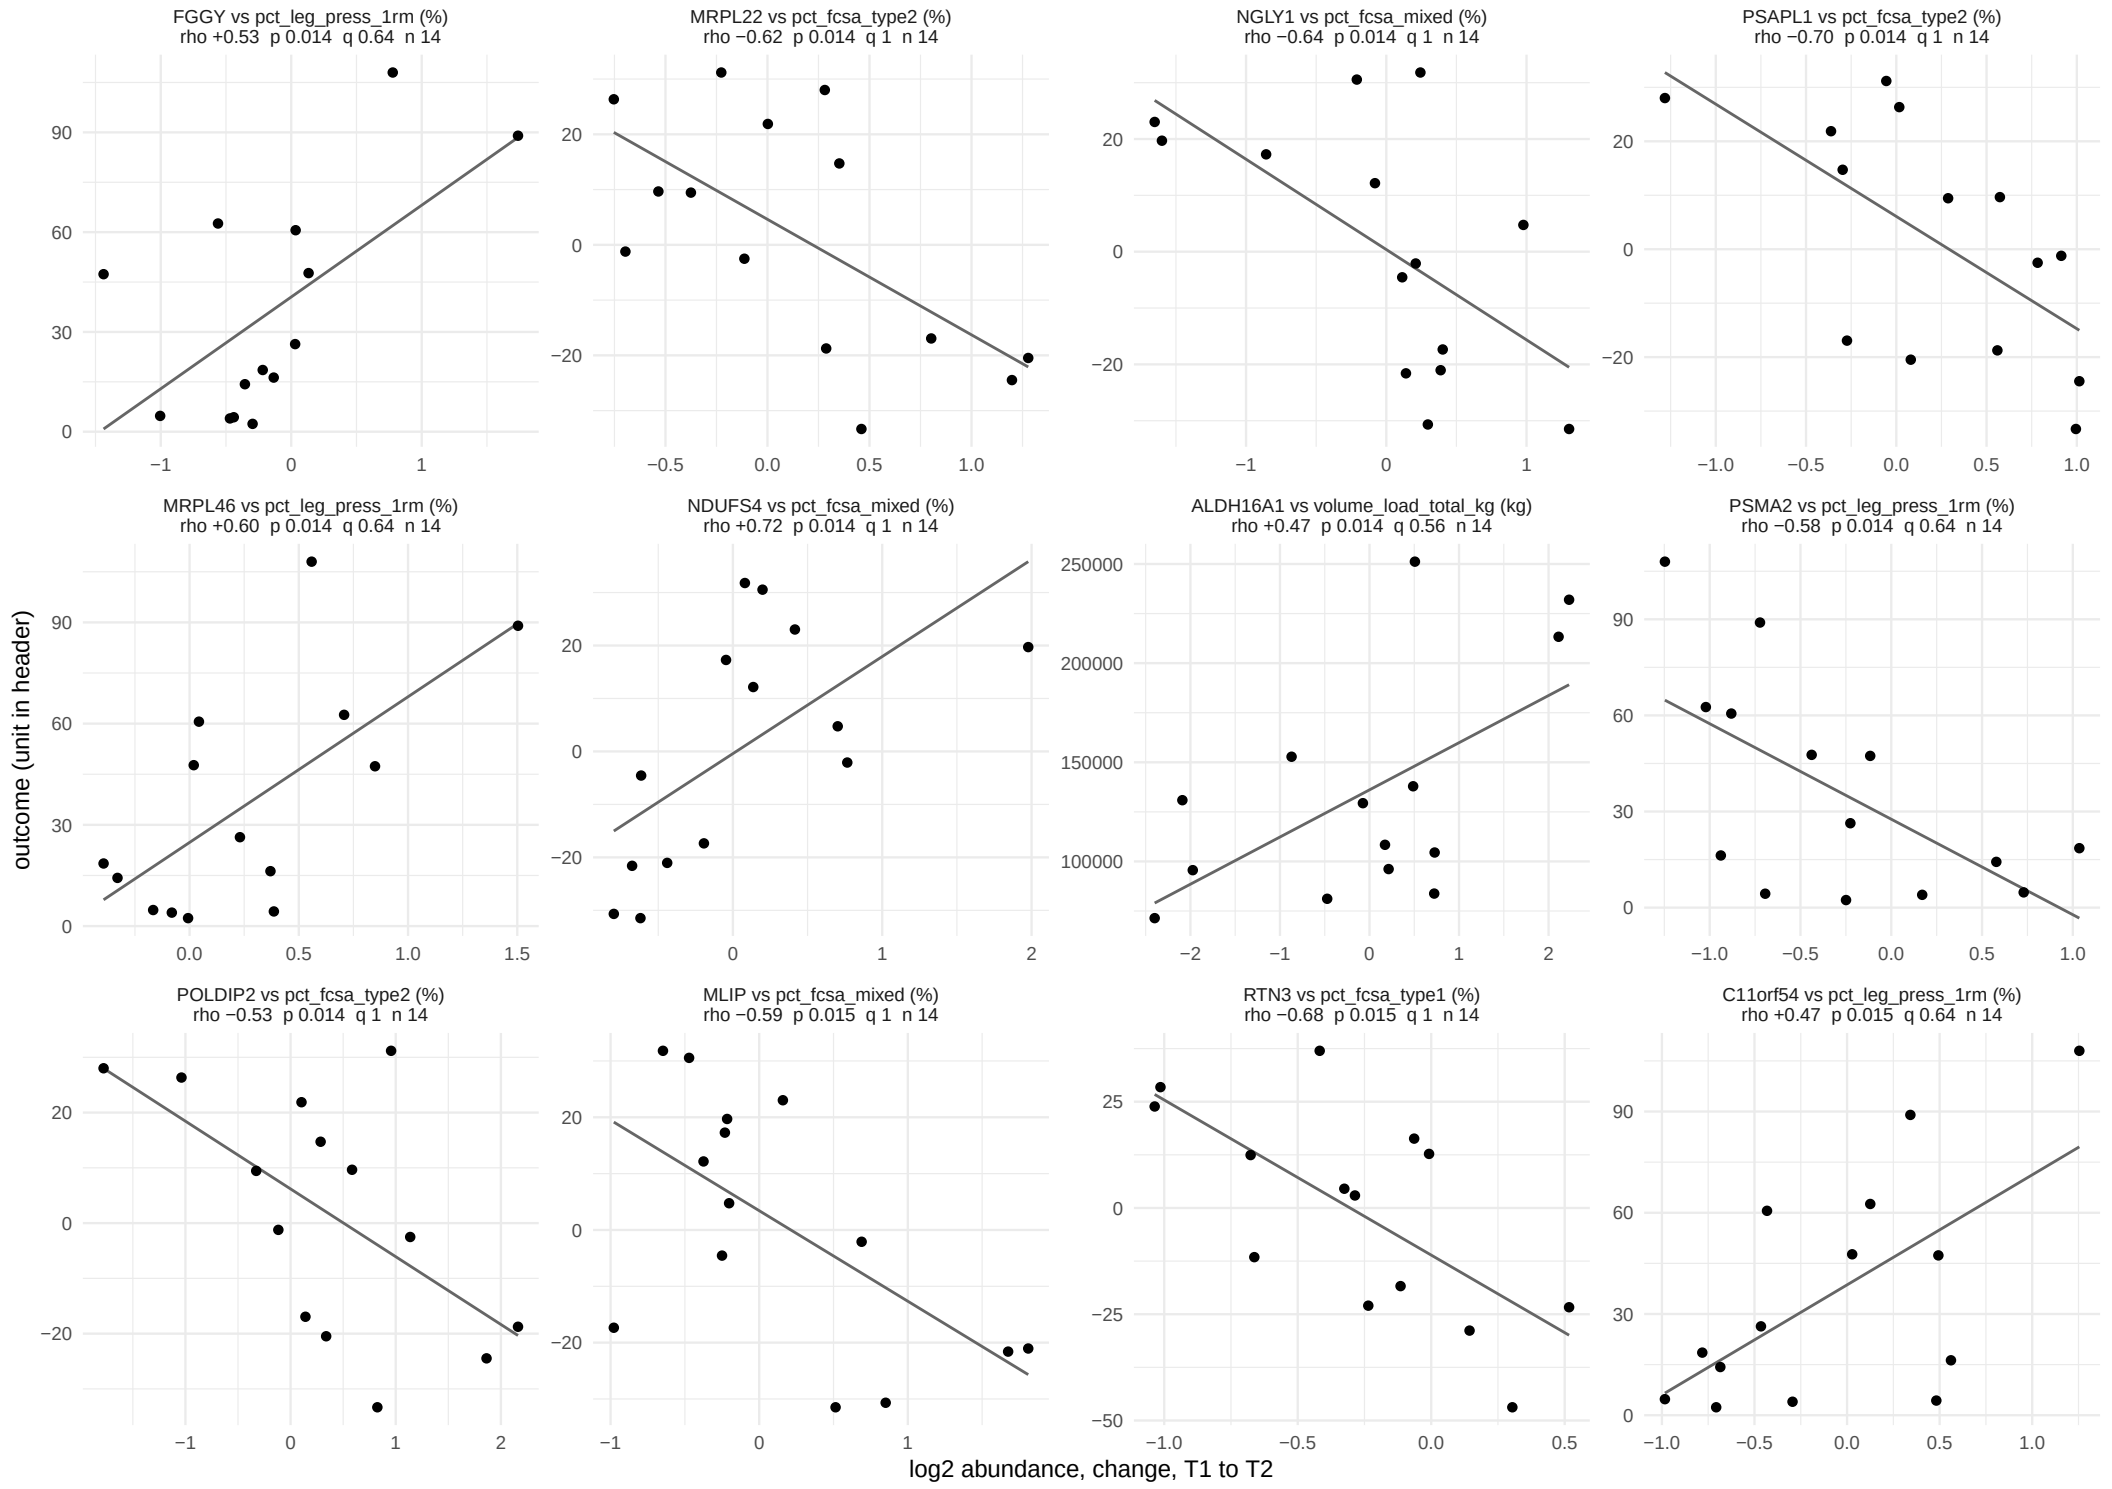

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, training window


605 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 14 of 51.

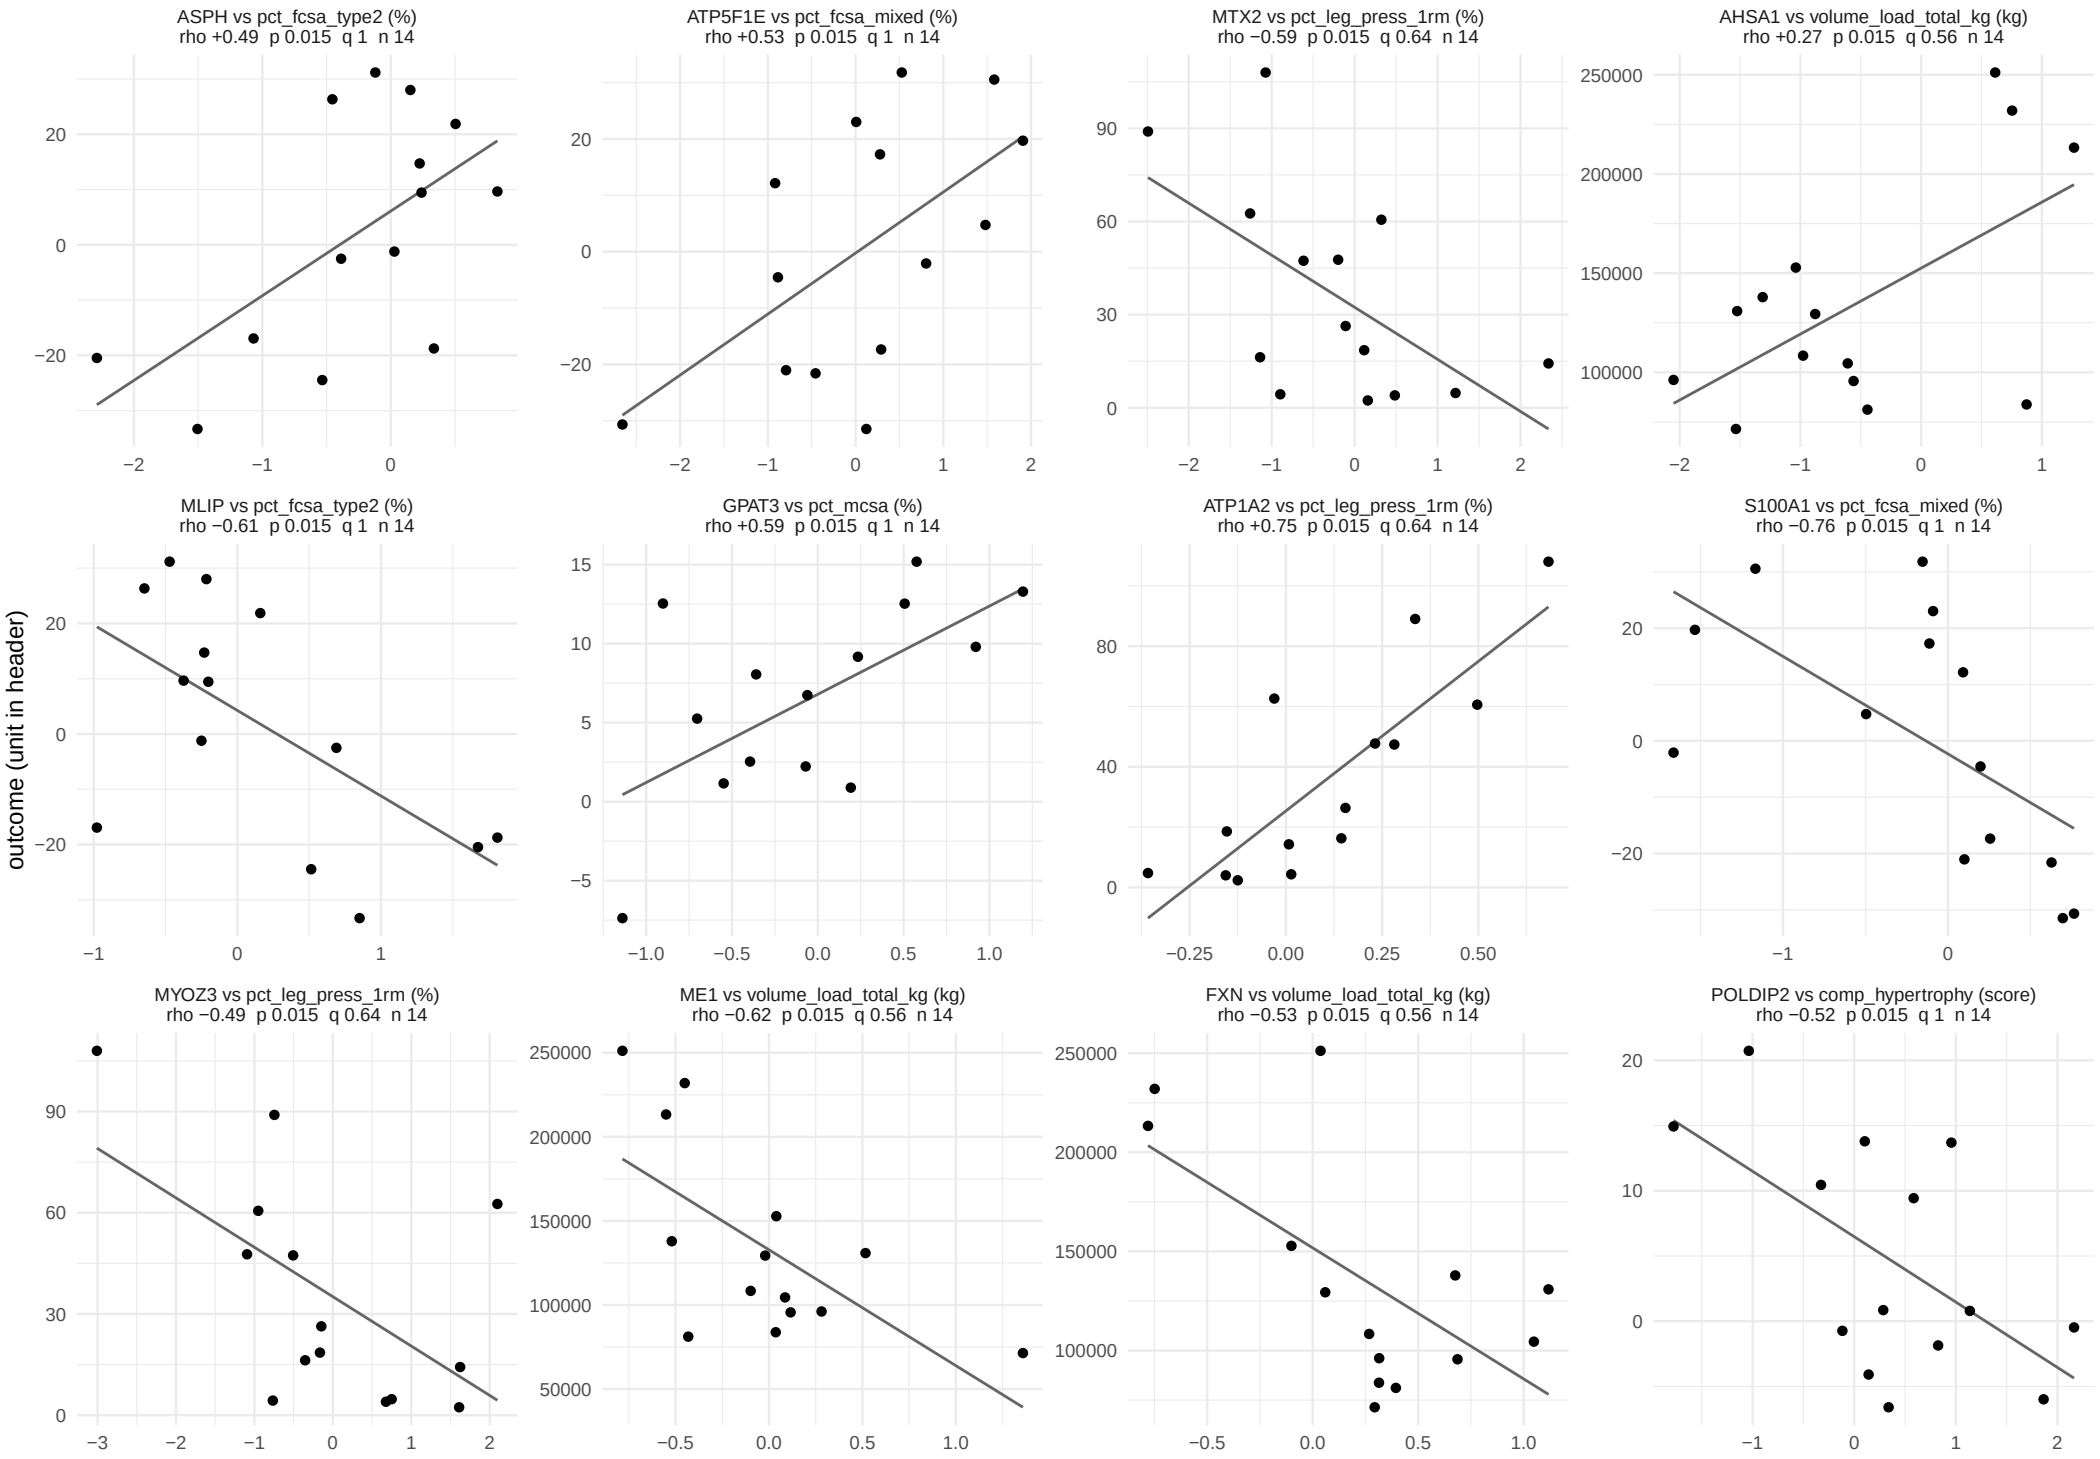

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, training window


605 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 15 of 51.

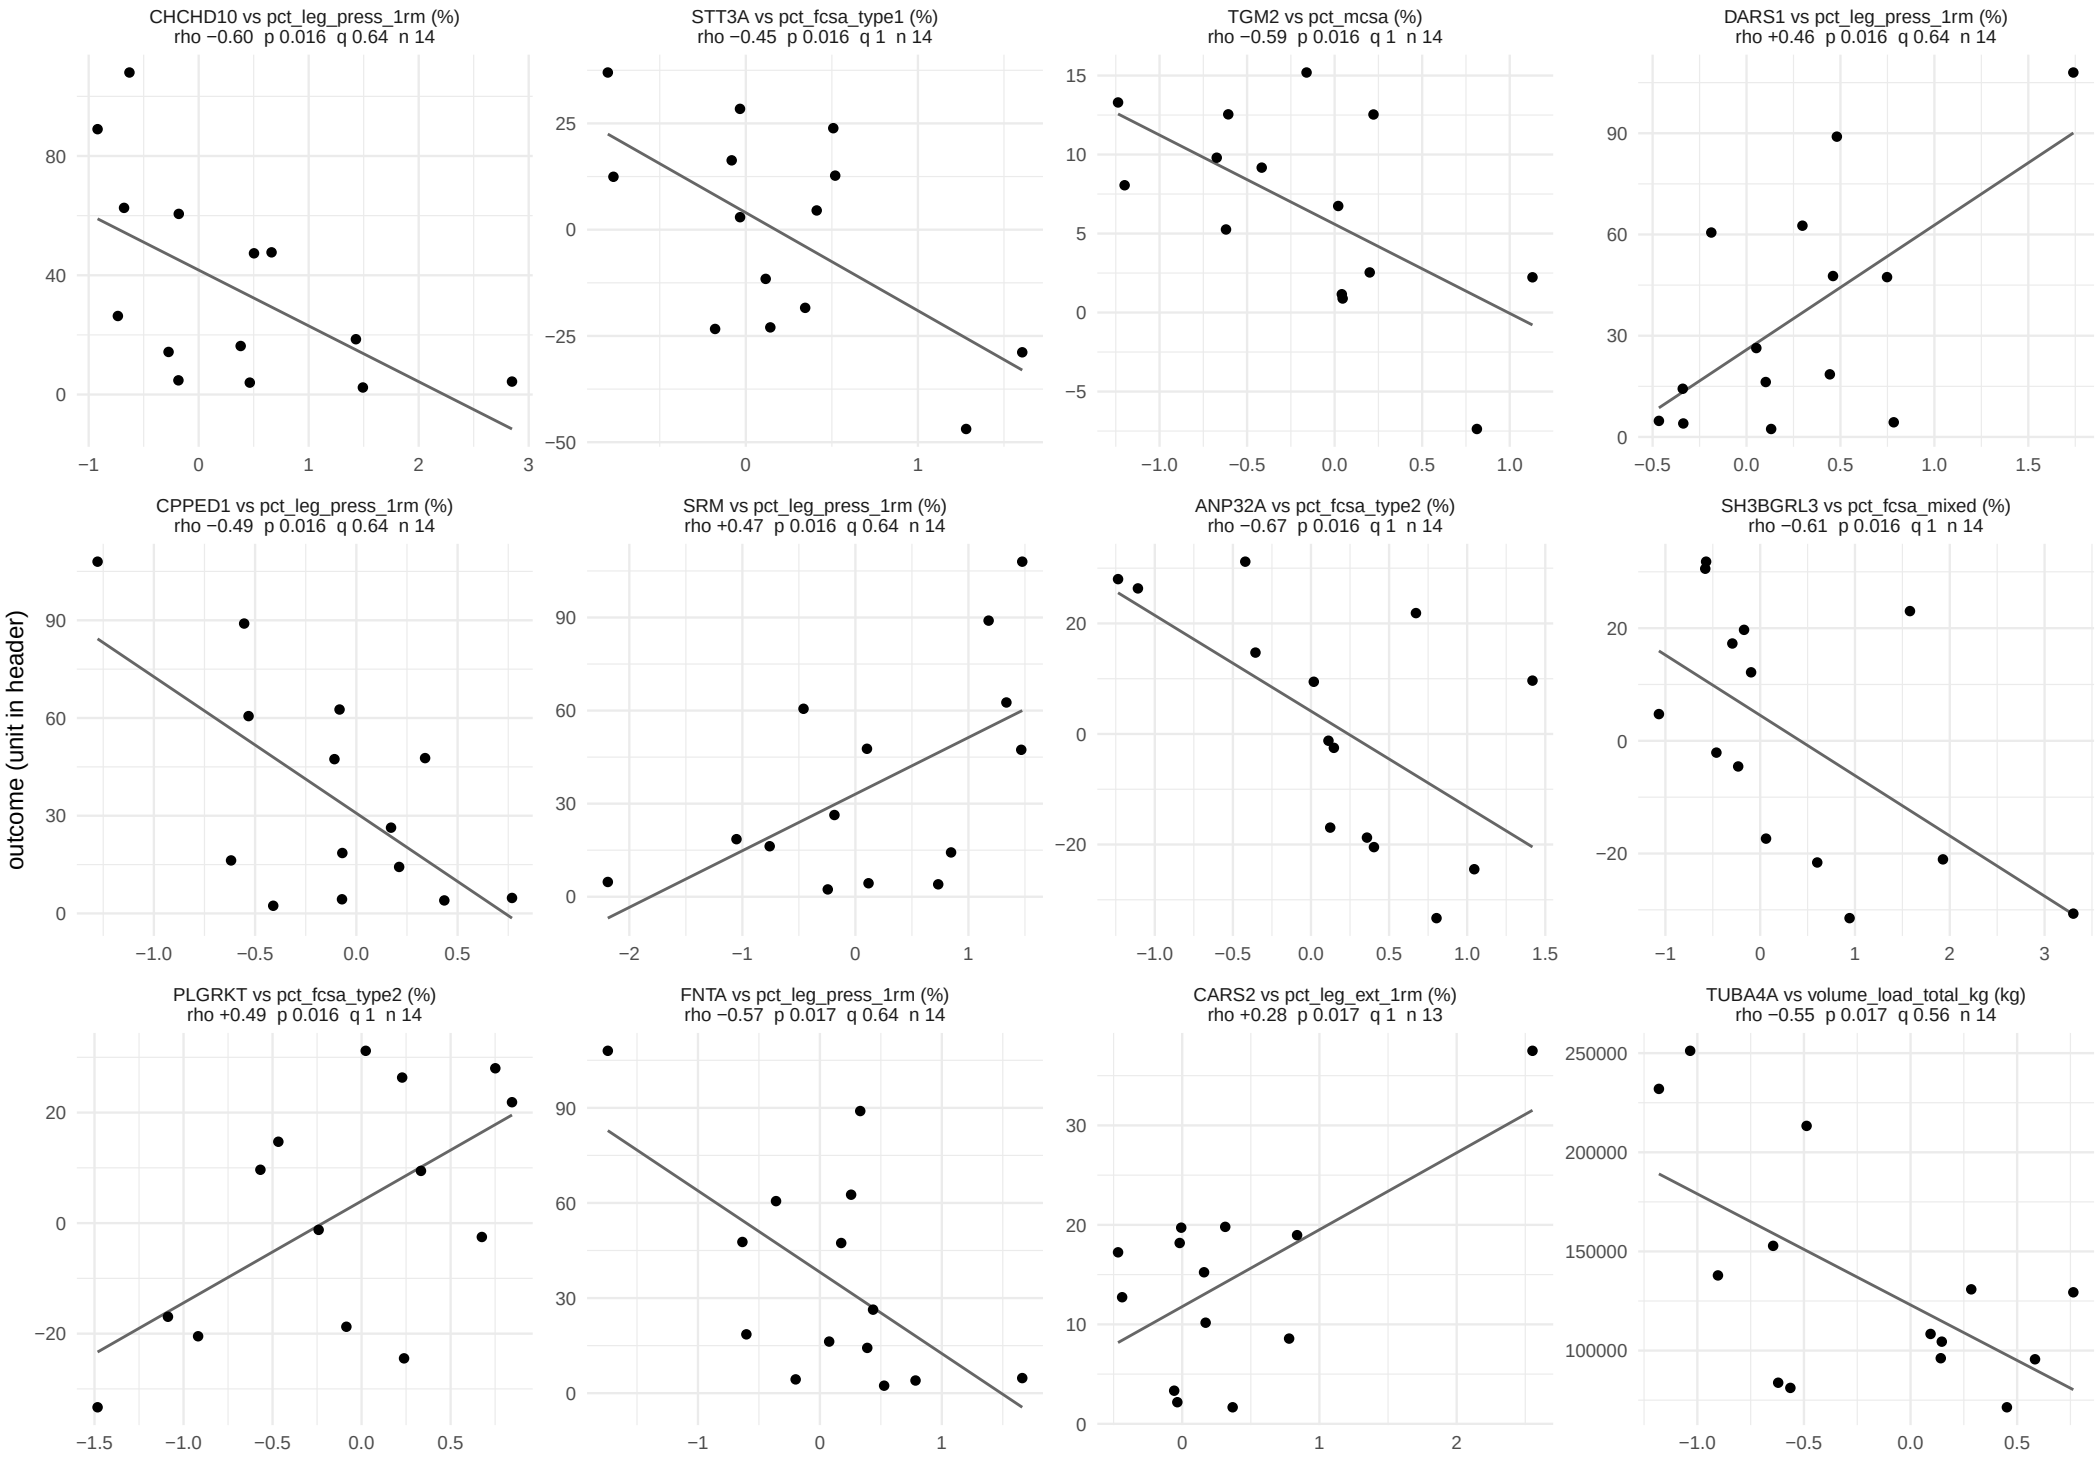

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, training window


605 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 16 of 51.

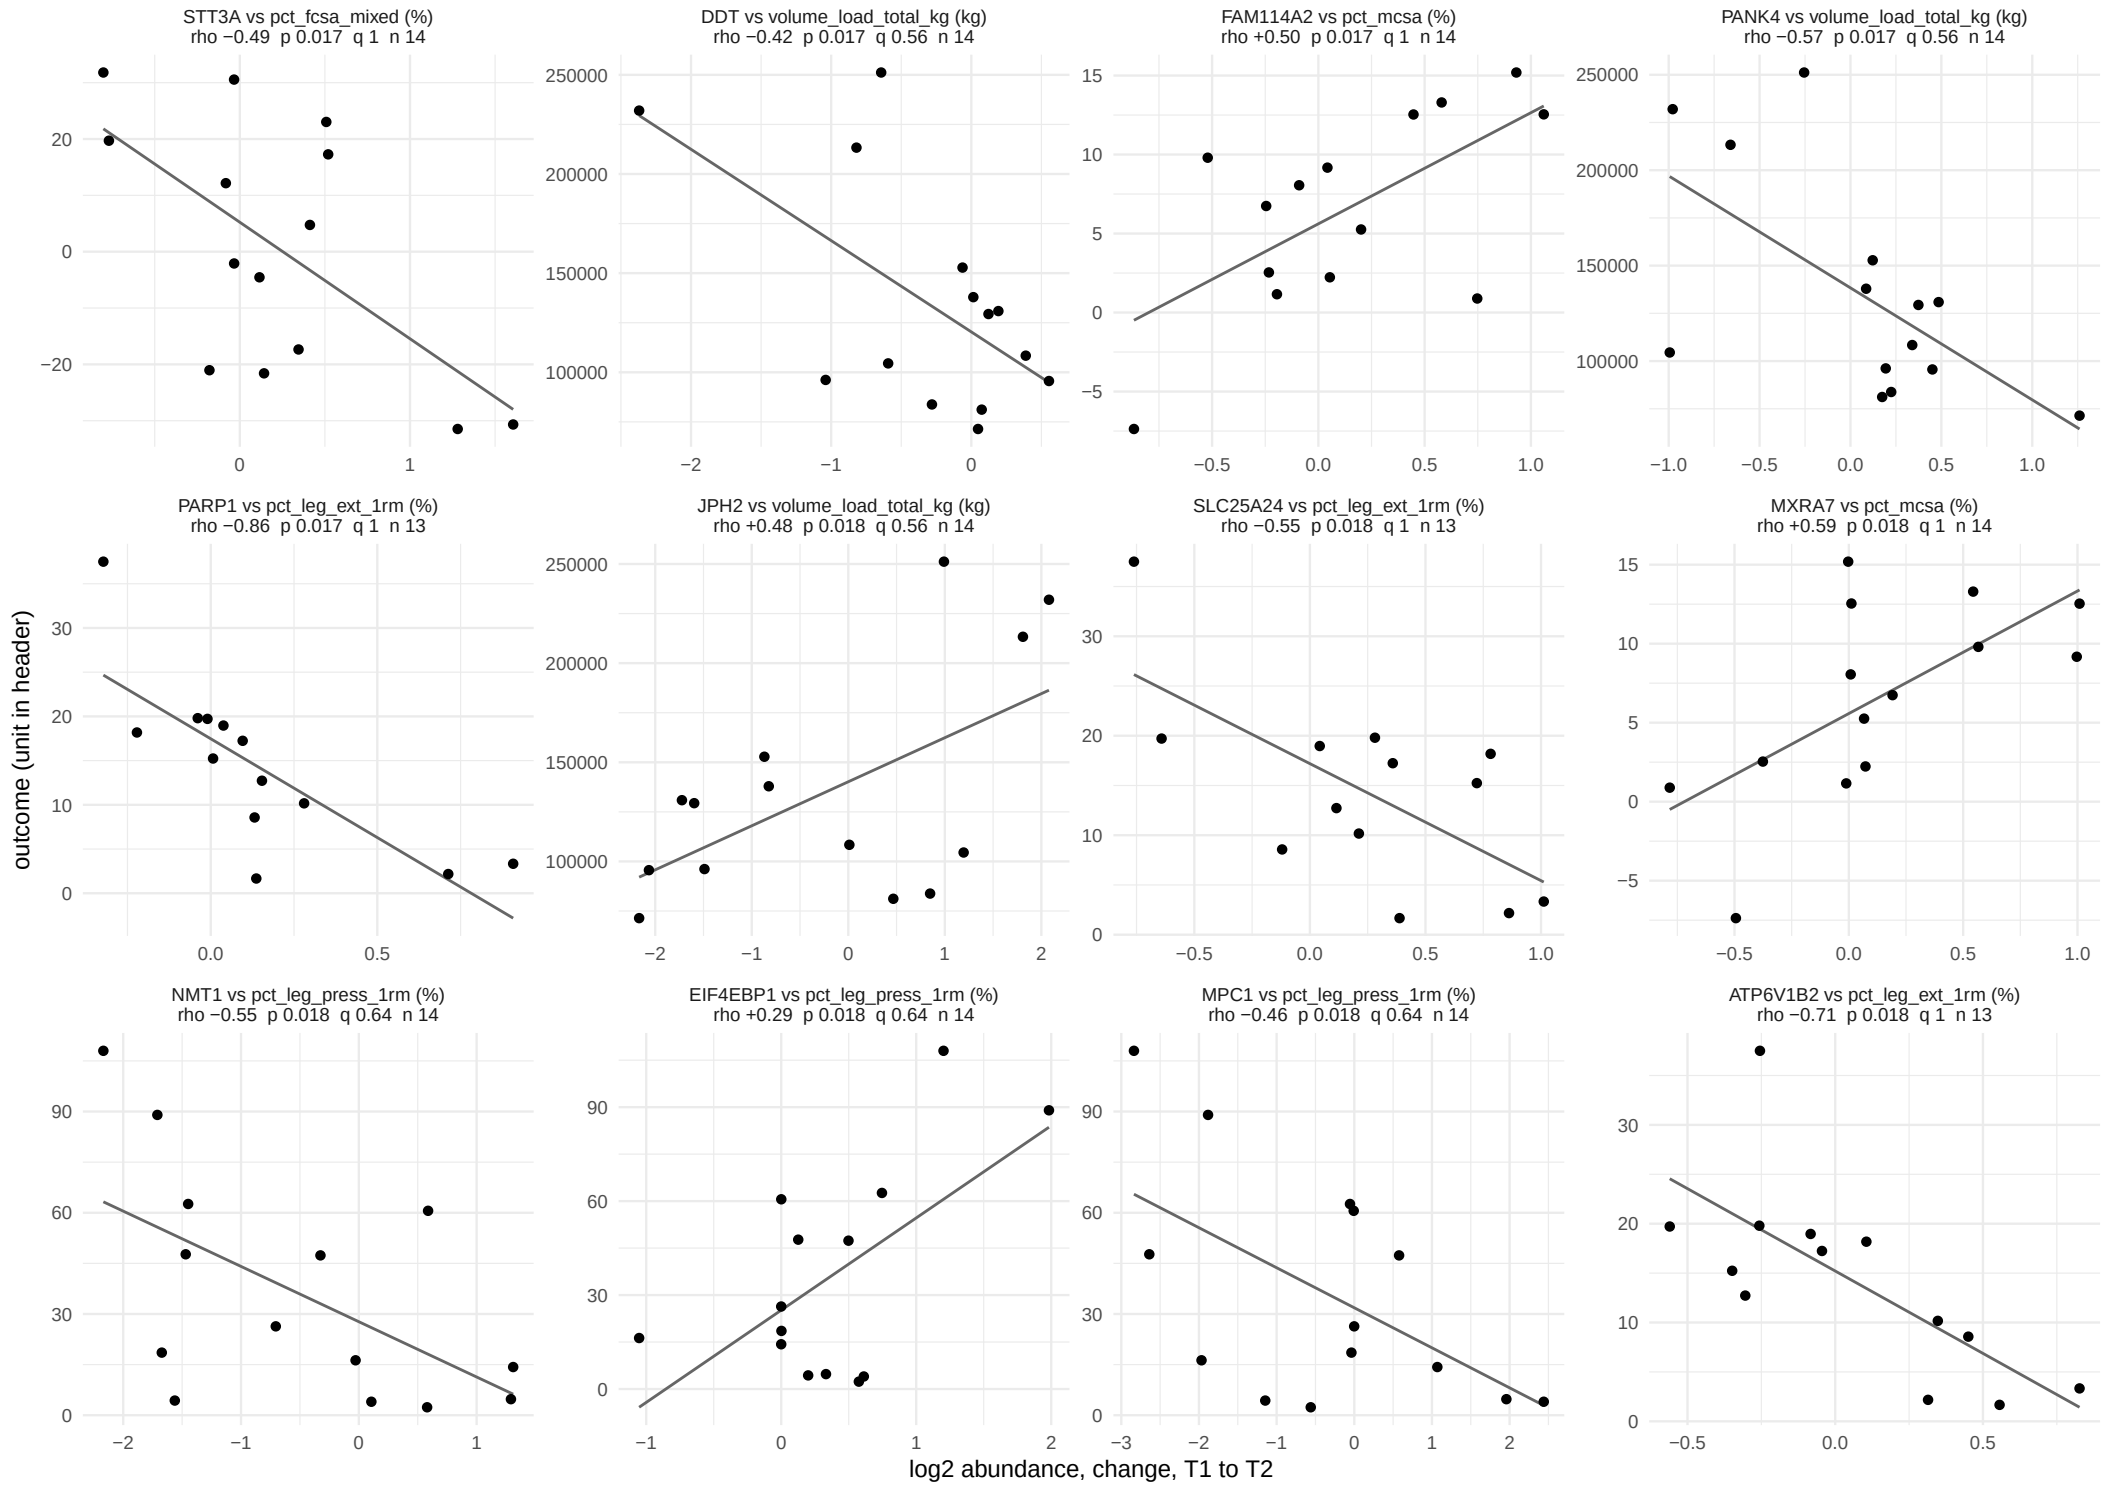

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, training window


605 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 17 of 51.

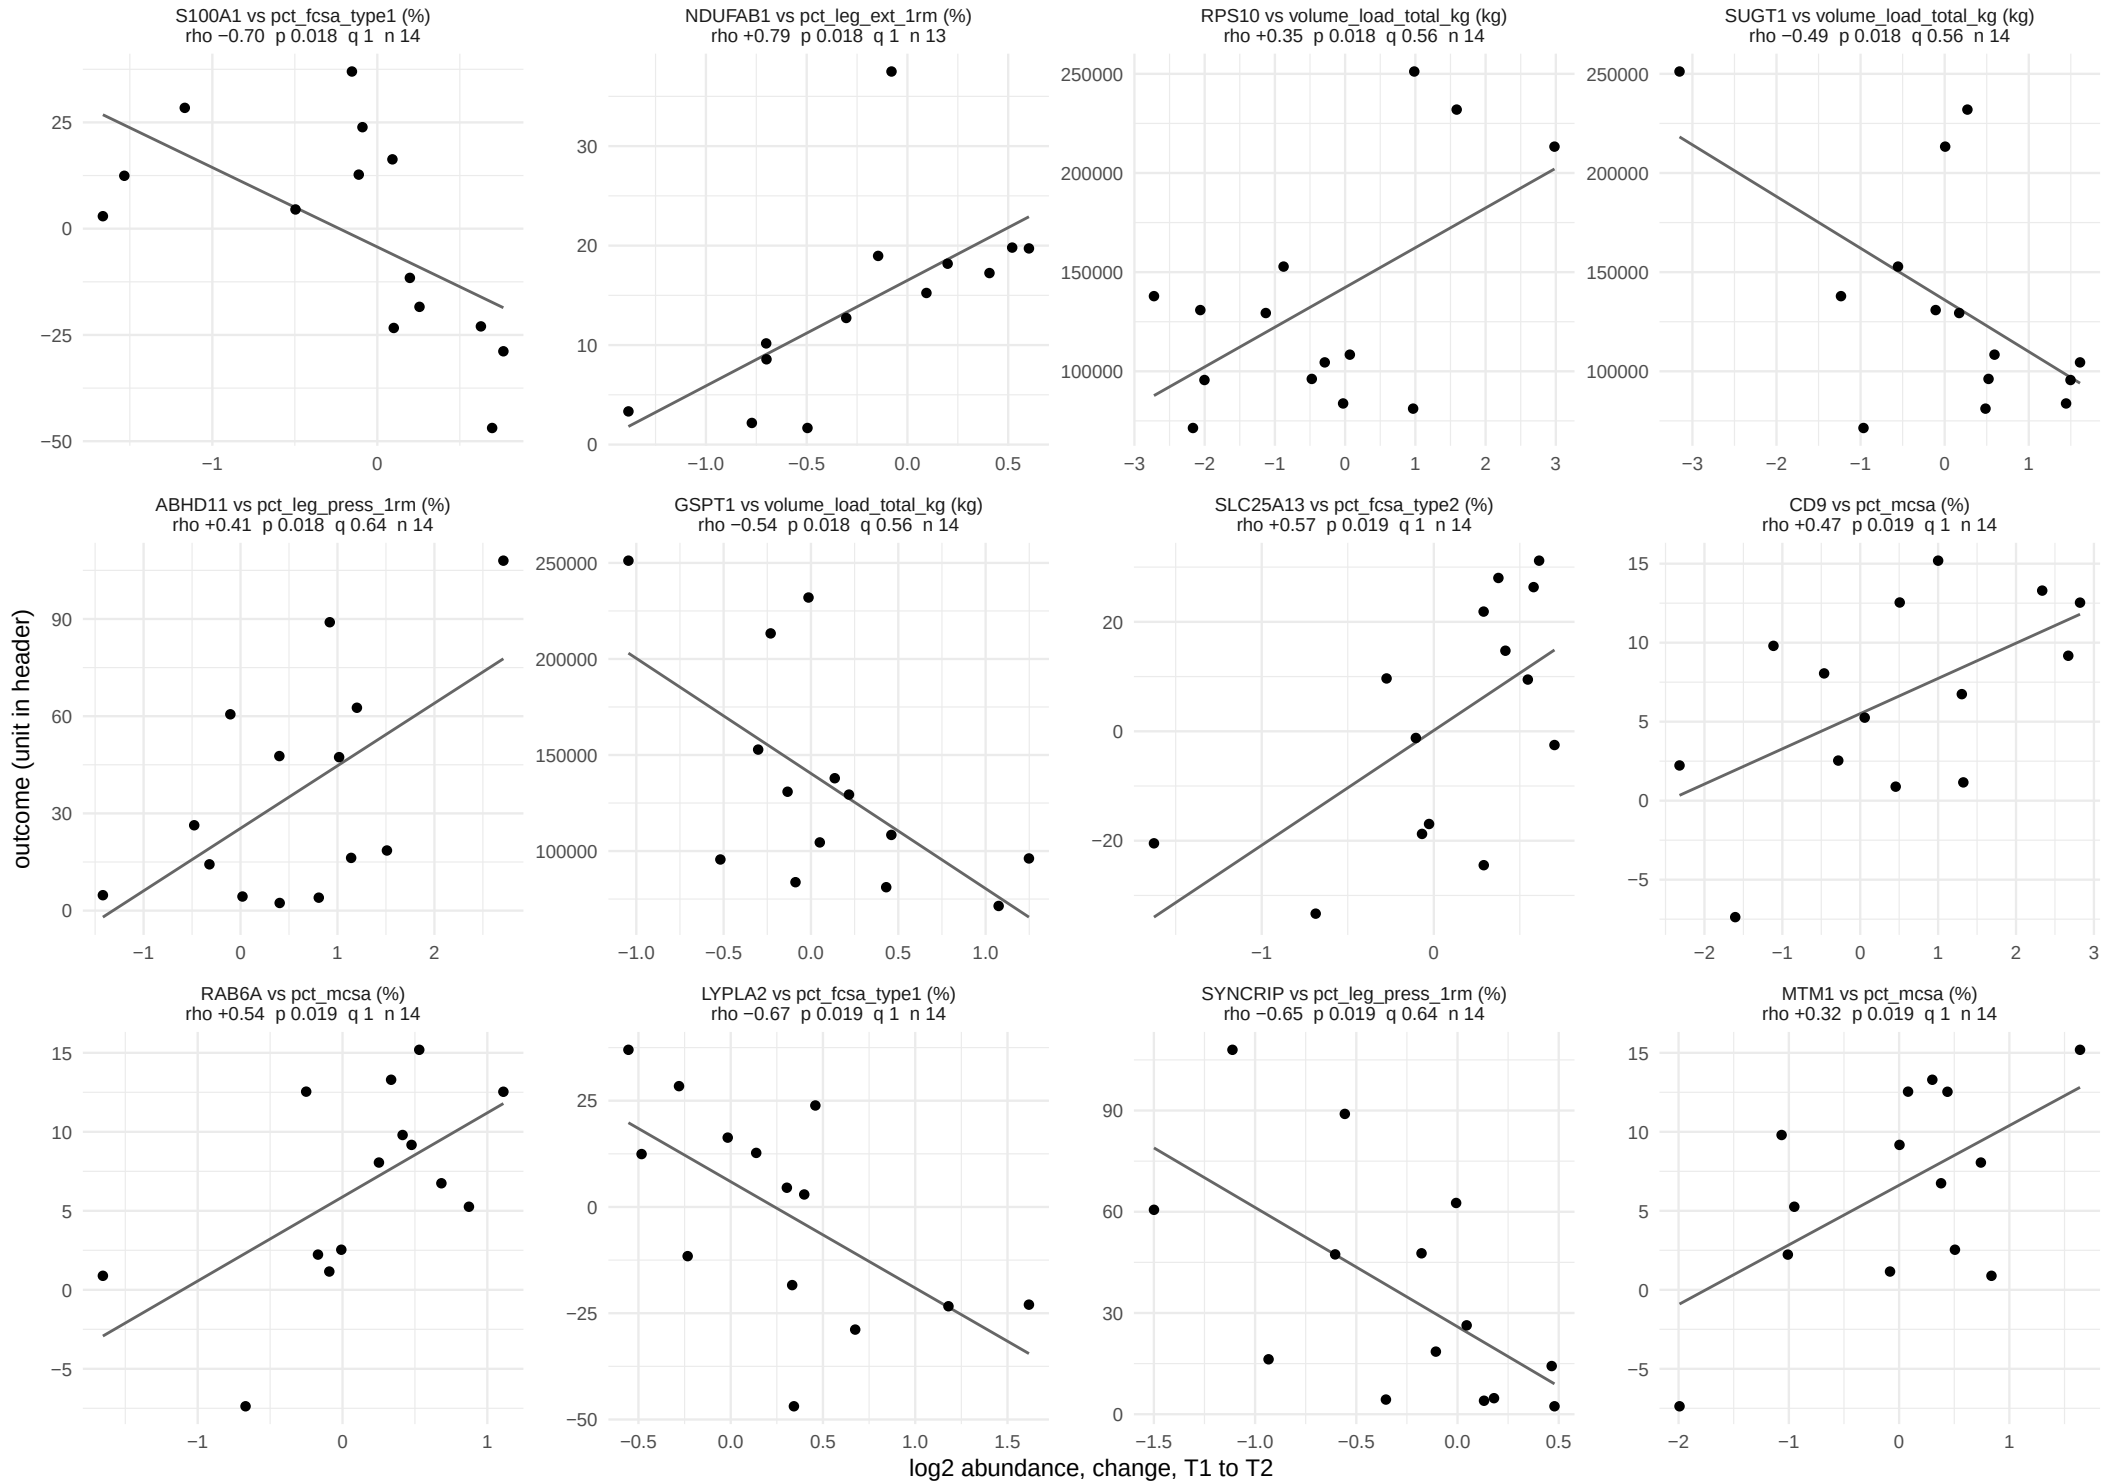

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, training window


605 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 18 of 51.

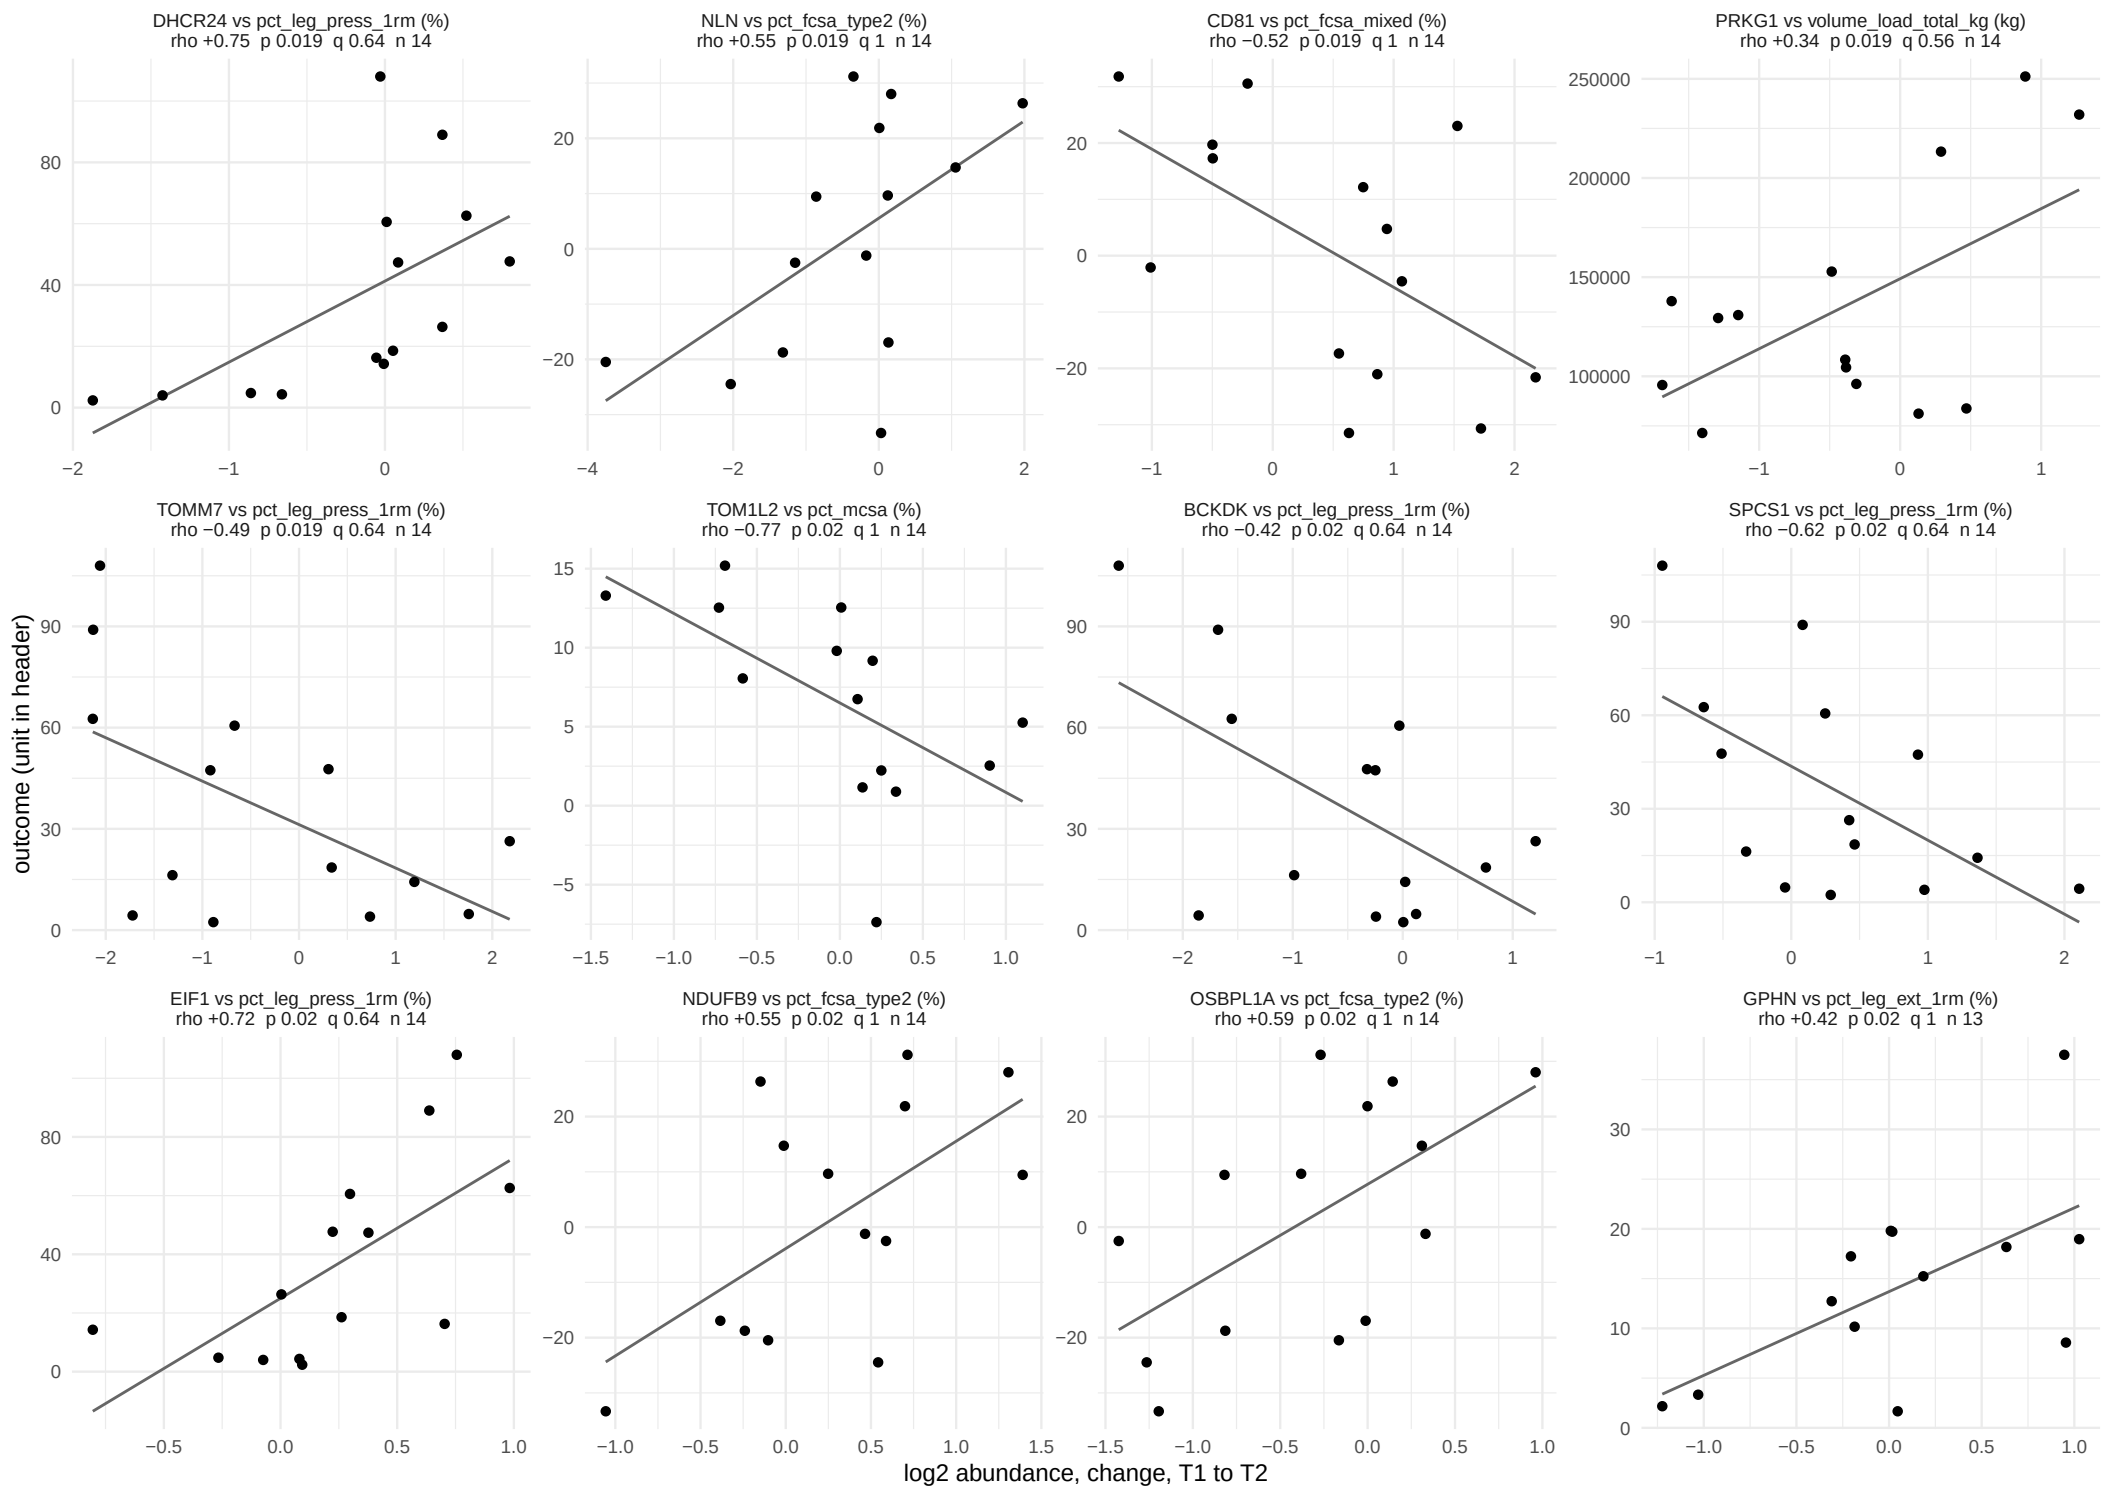

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, training window


605 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 19 of 51.

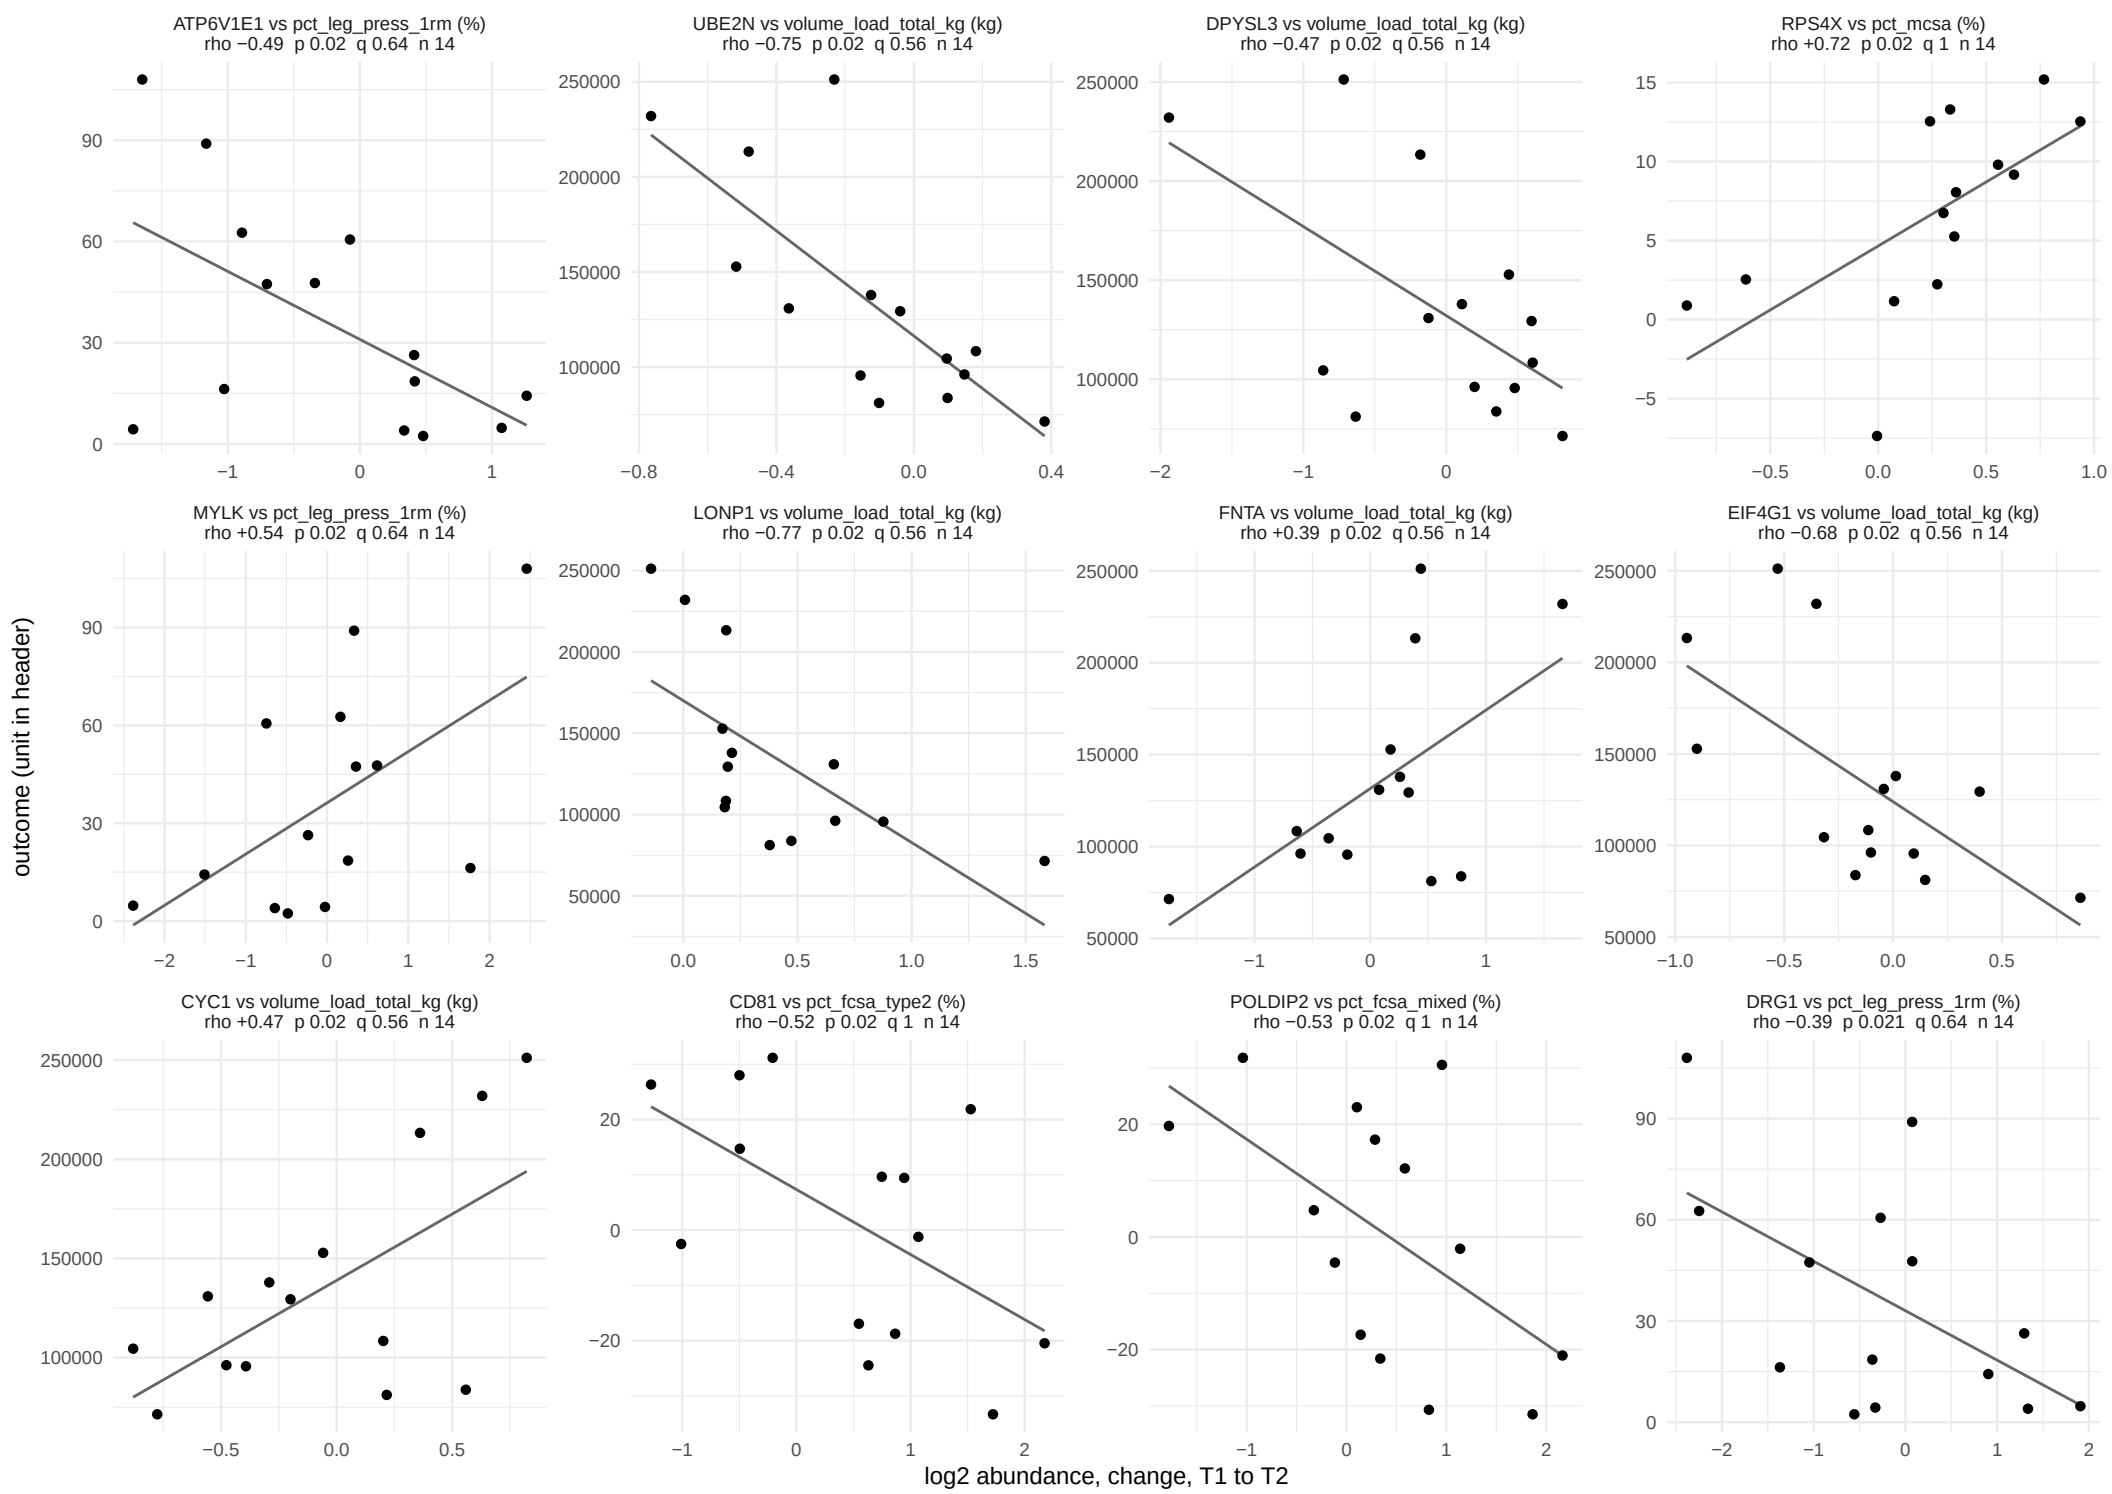

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, training window


605 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 20 of 51.

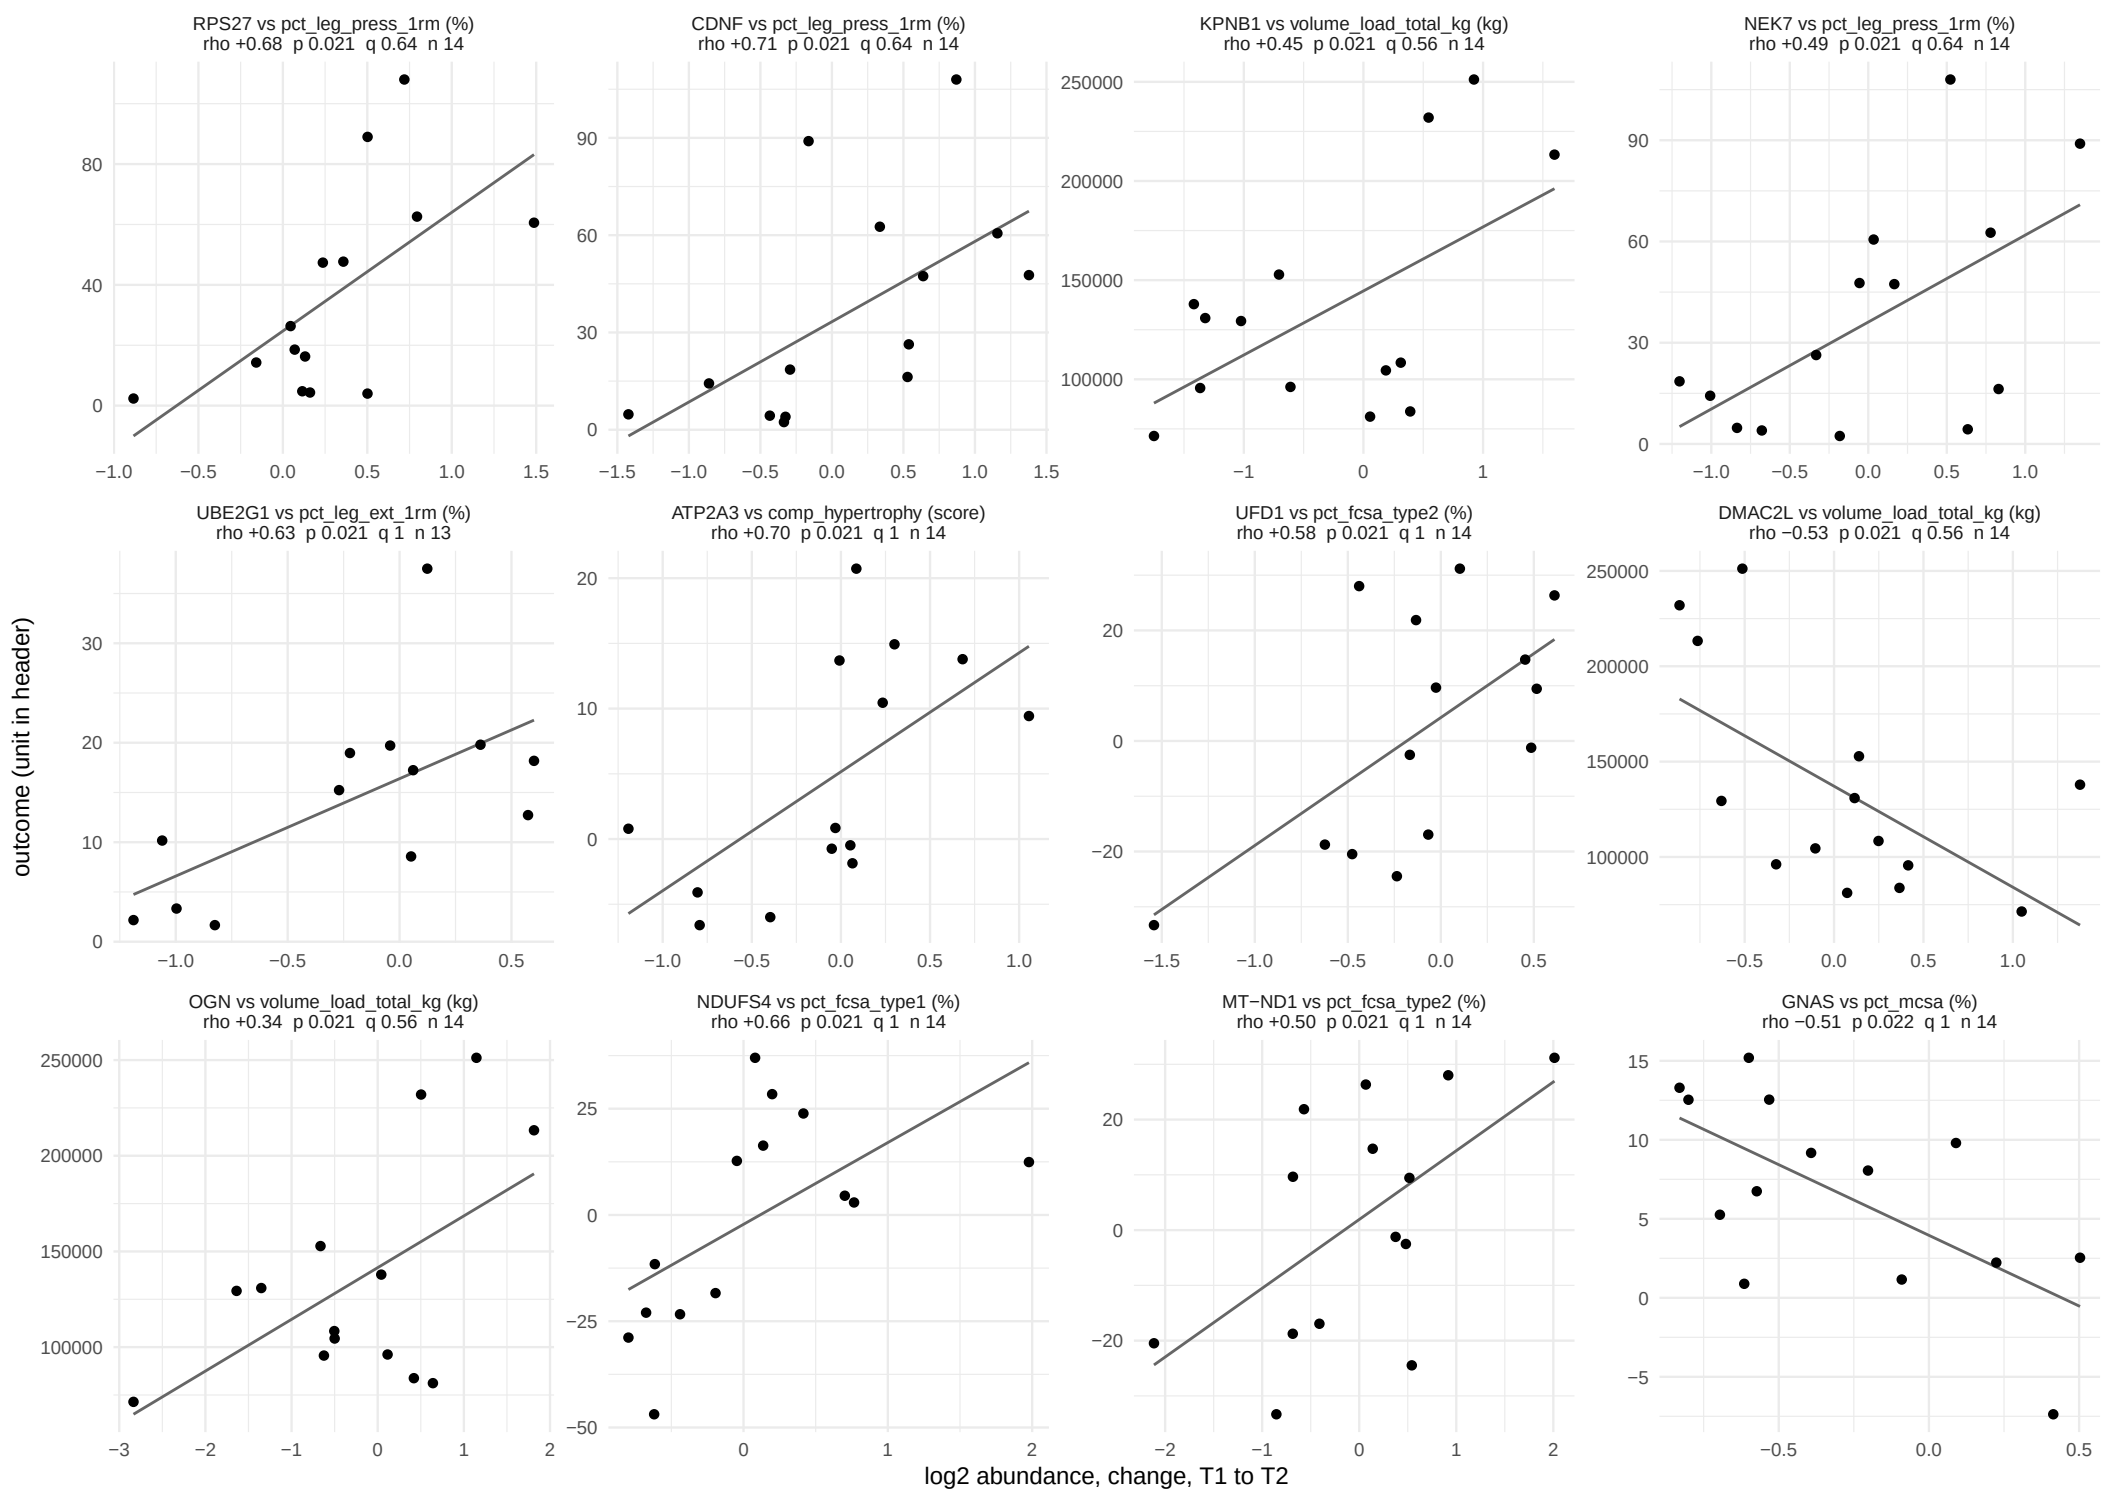

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, training window


605 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 21 of 51.

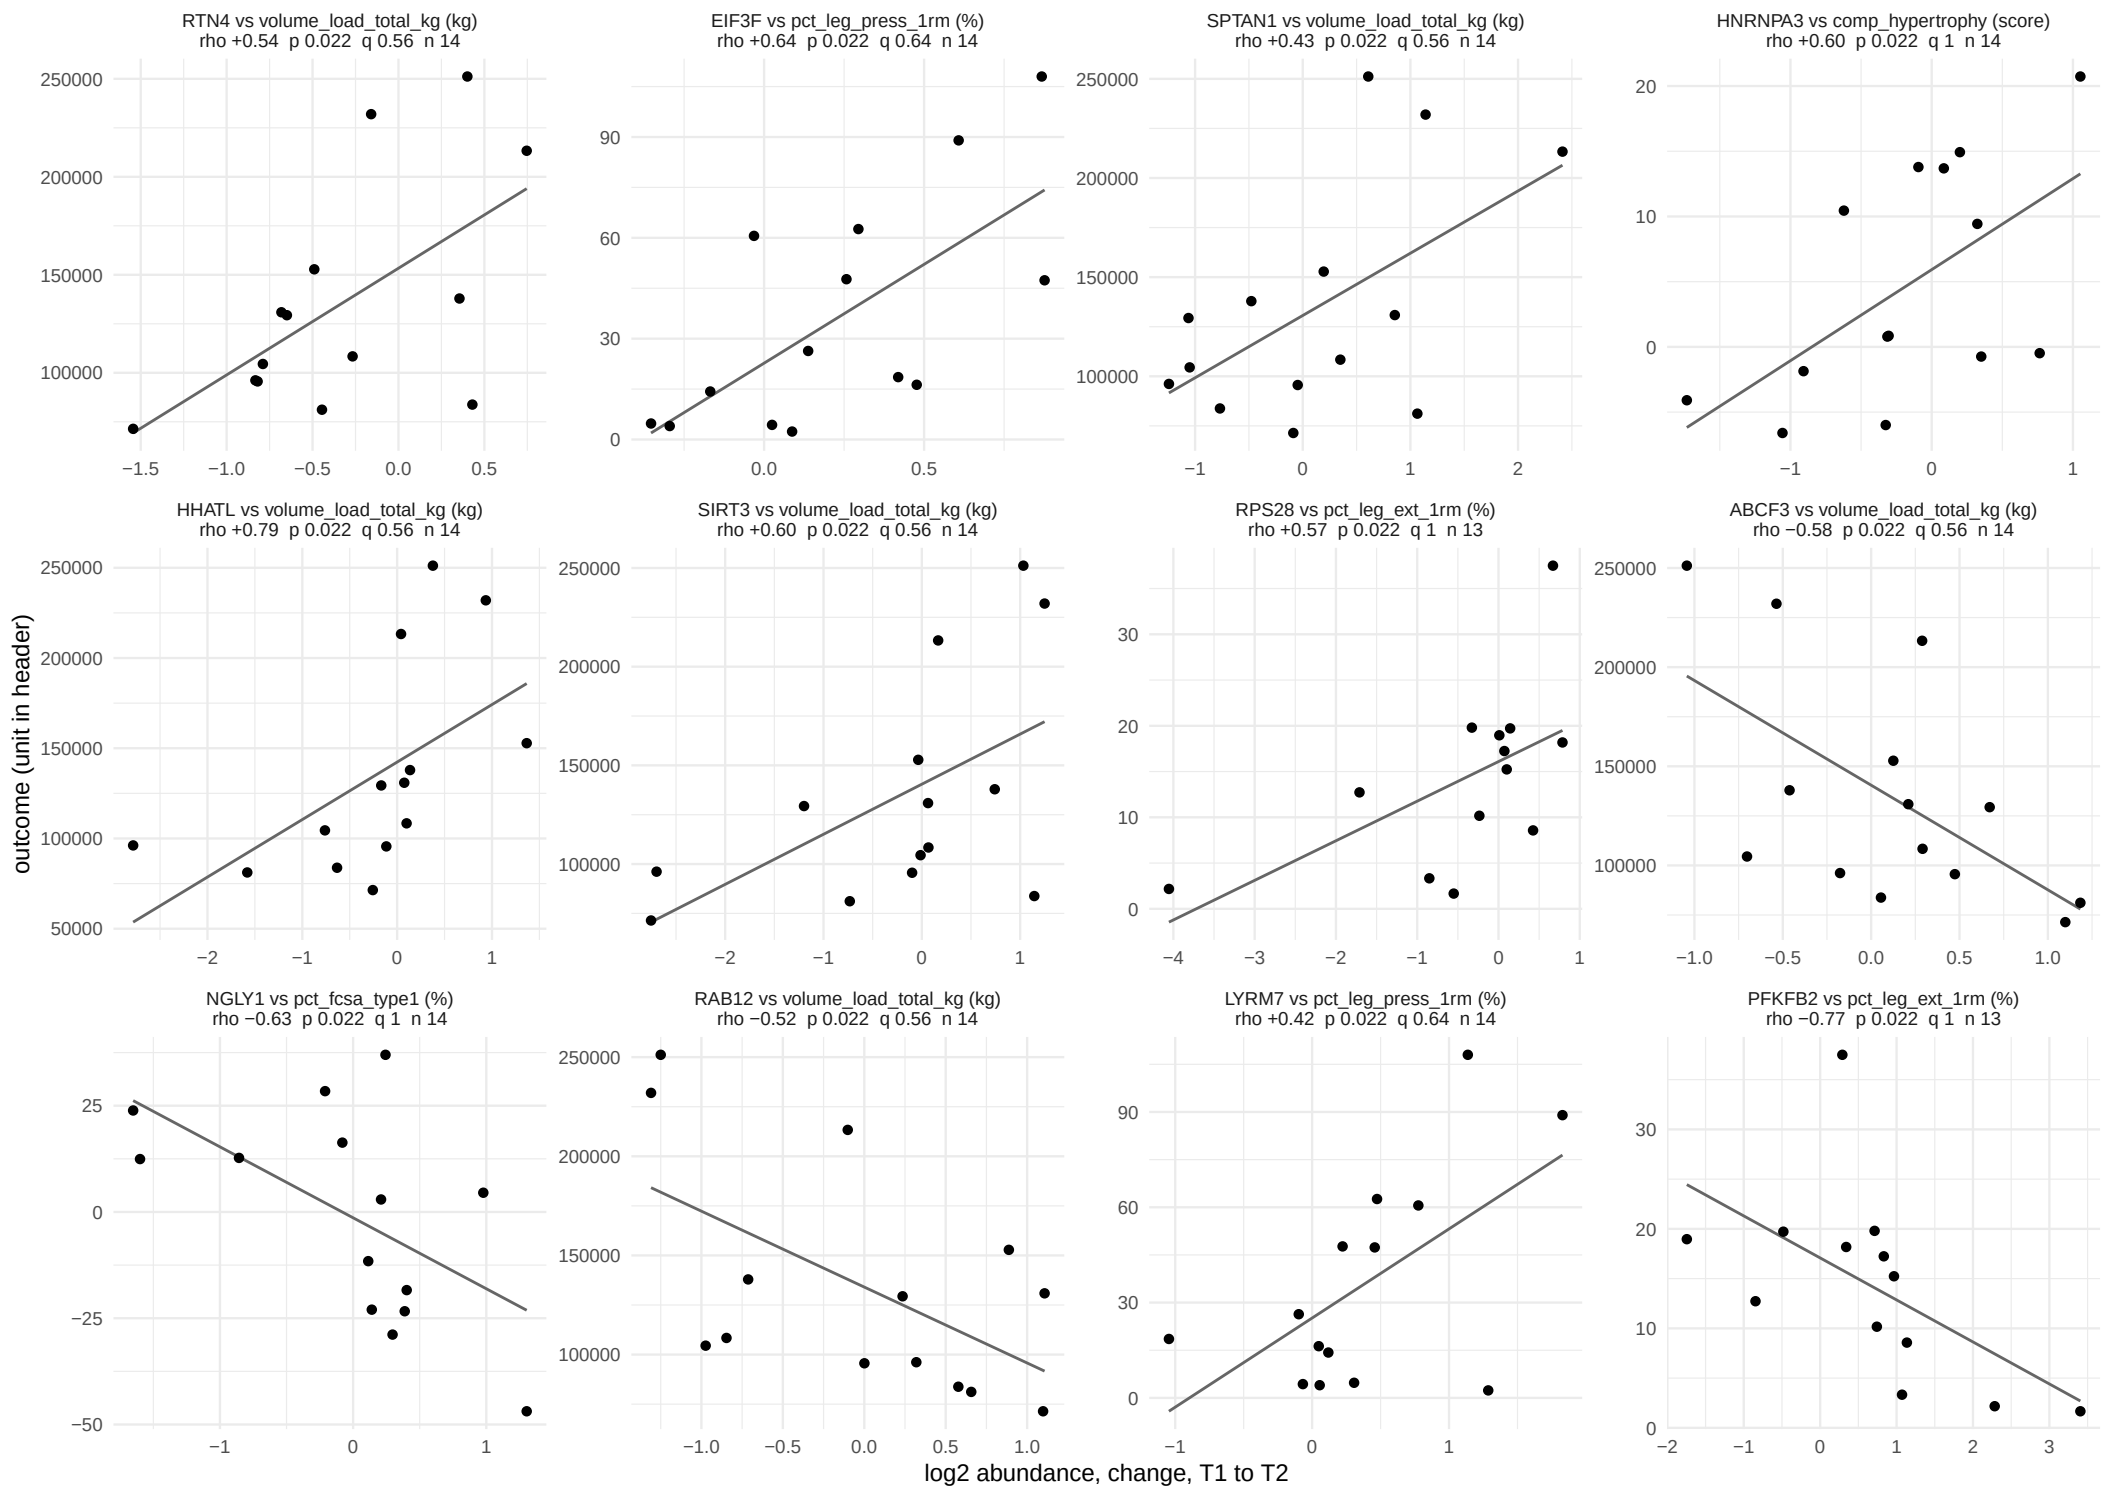

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, training window


605 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 22 of 51.

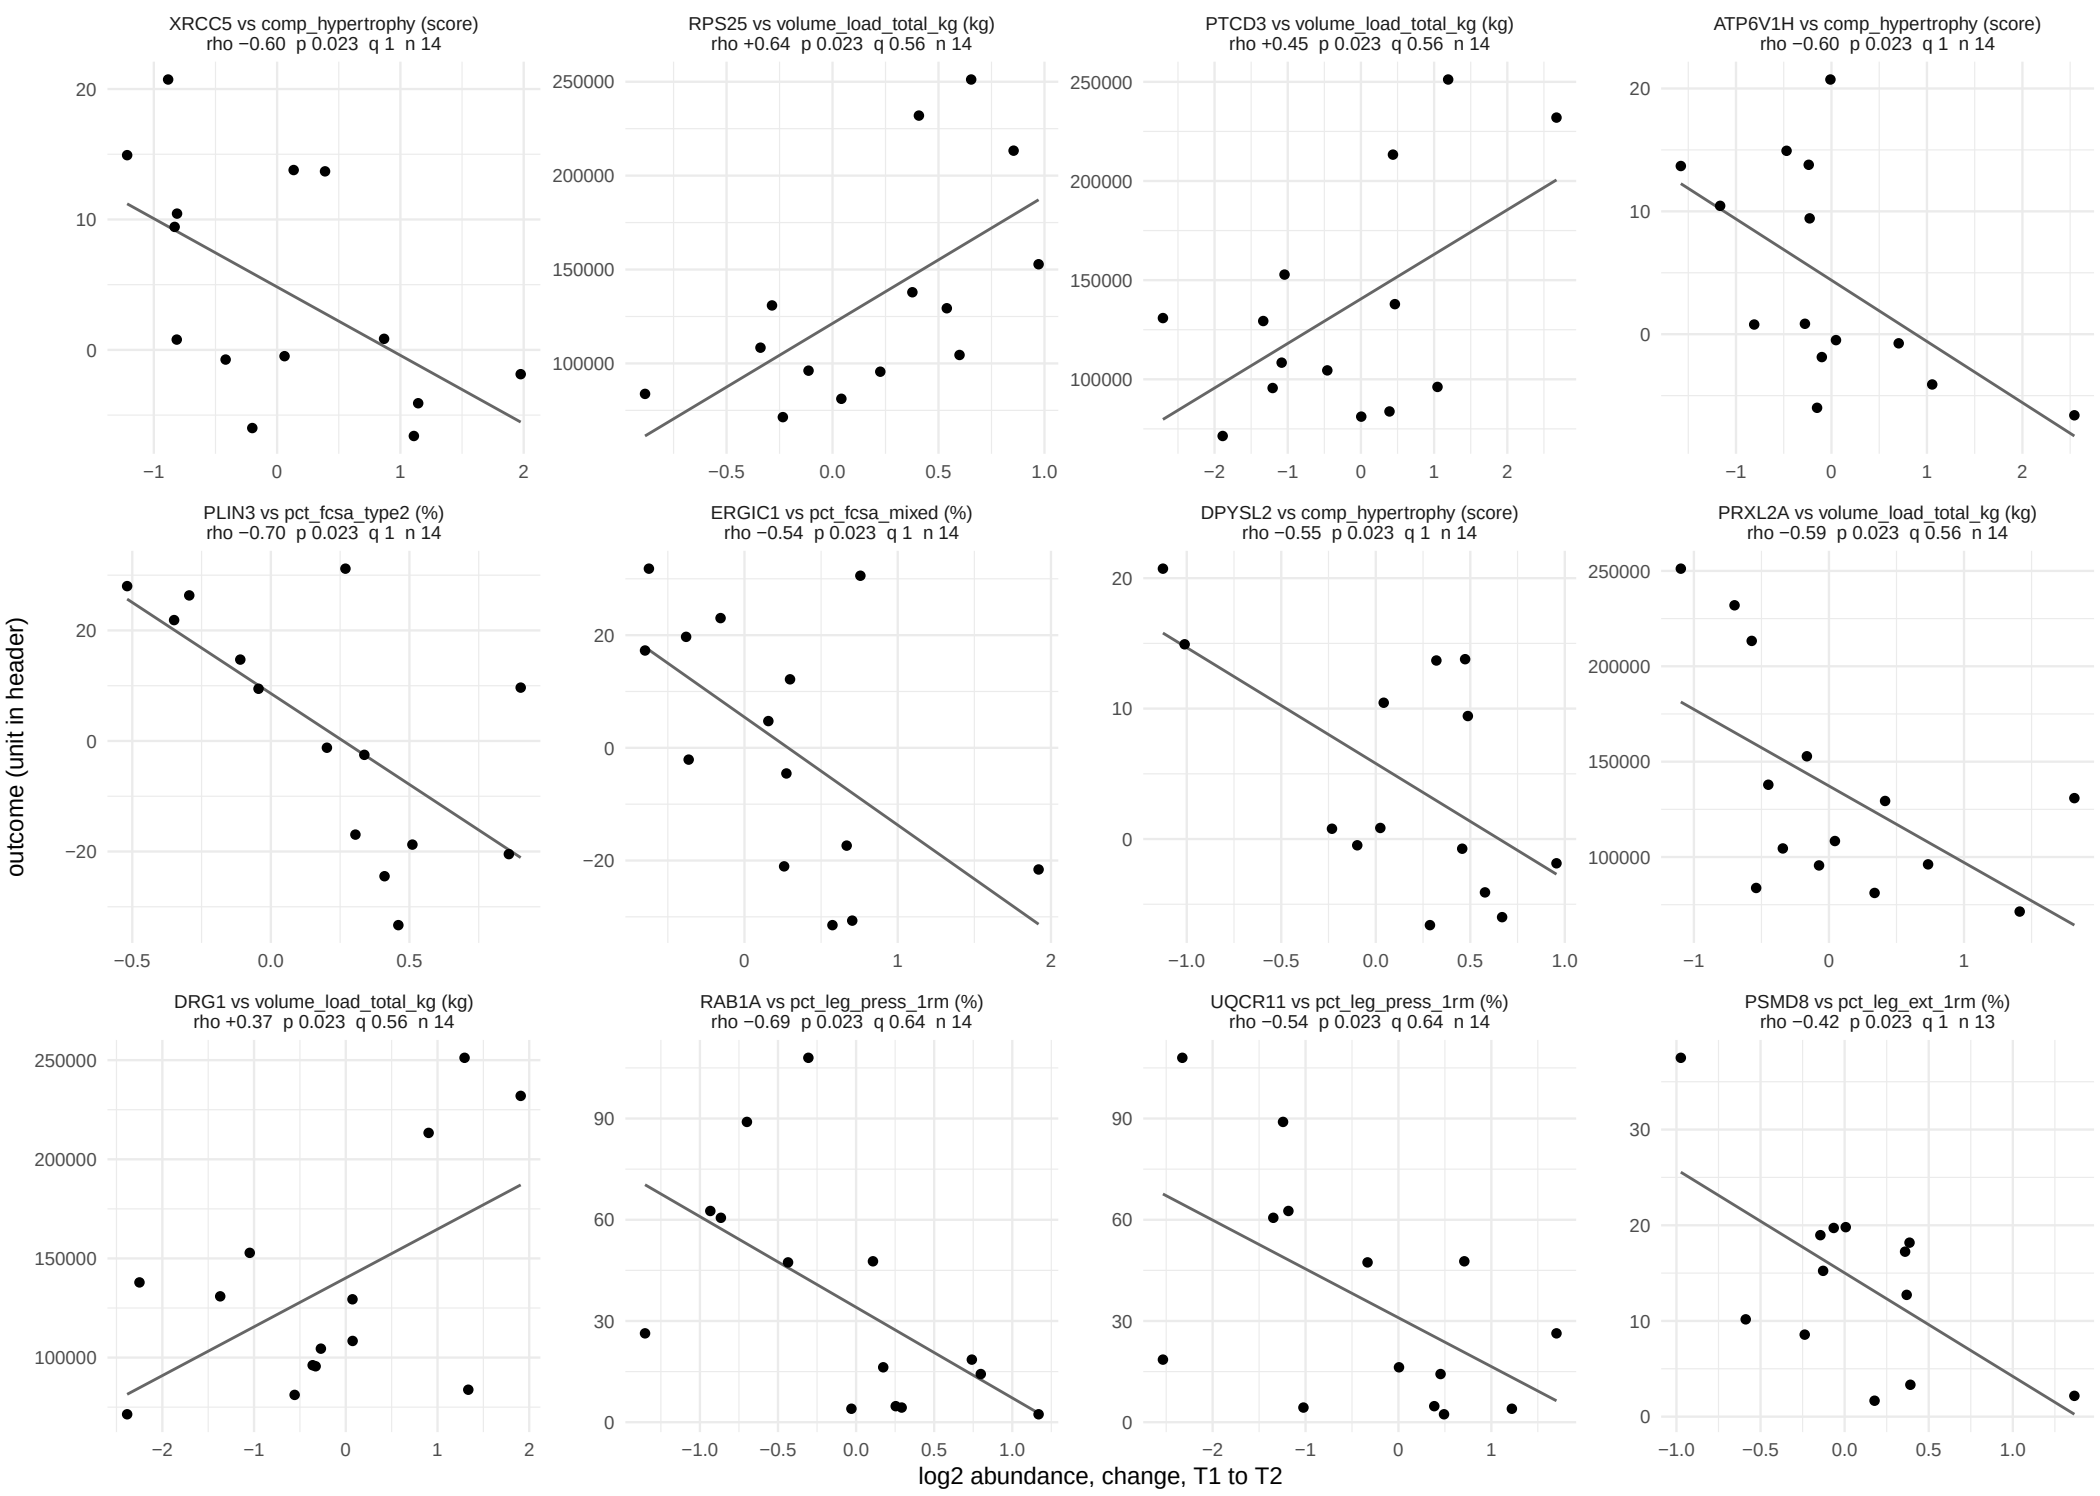

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, training window


605 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 23 of 51.

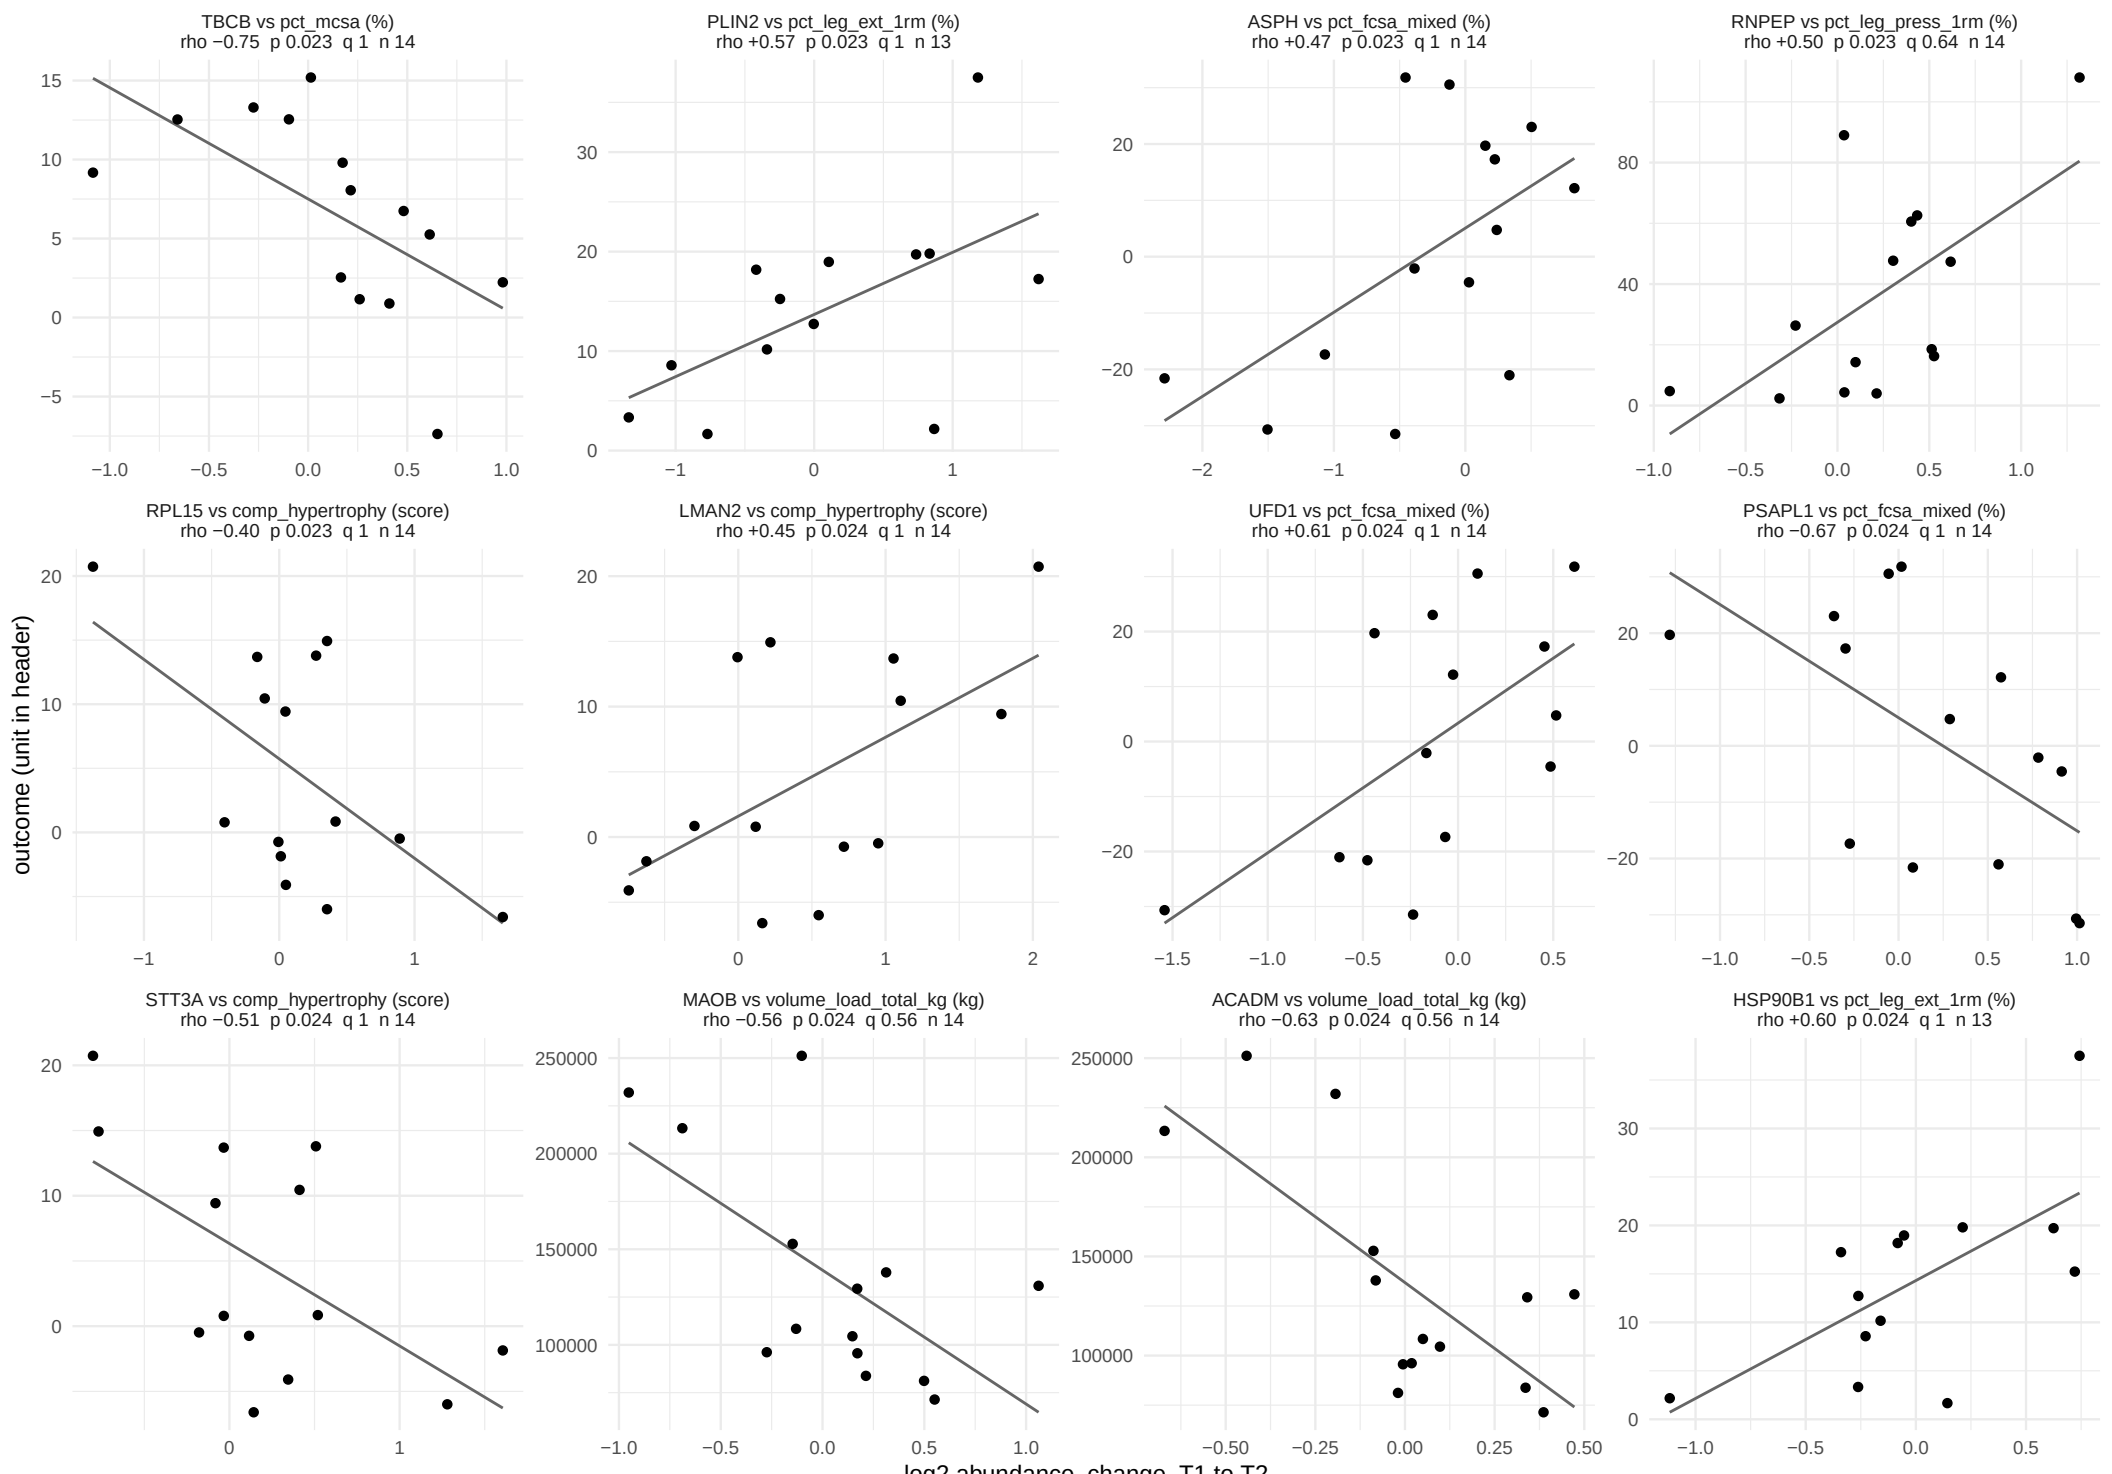

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, training window


605 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 24 of 51.

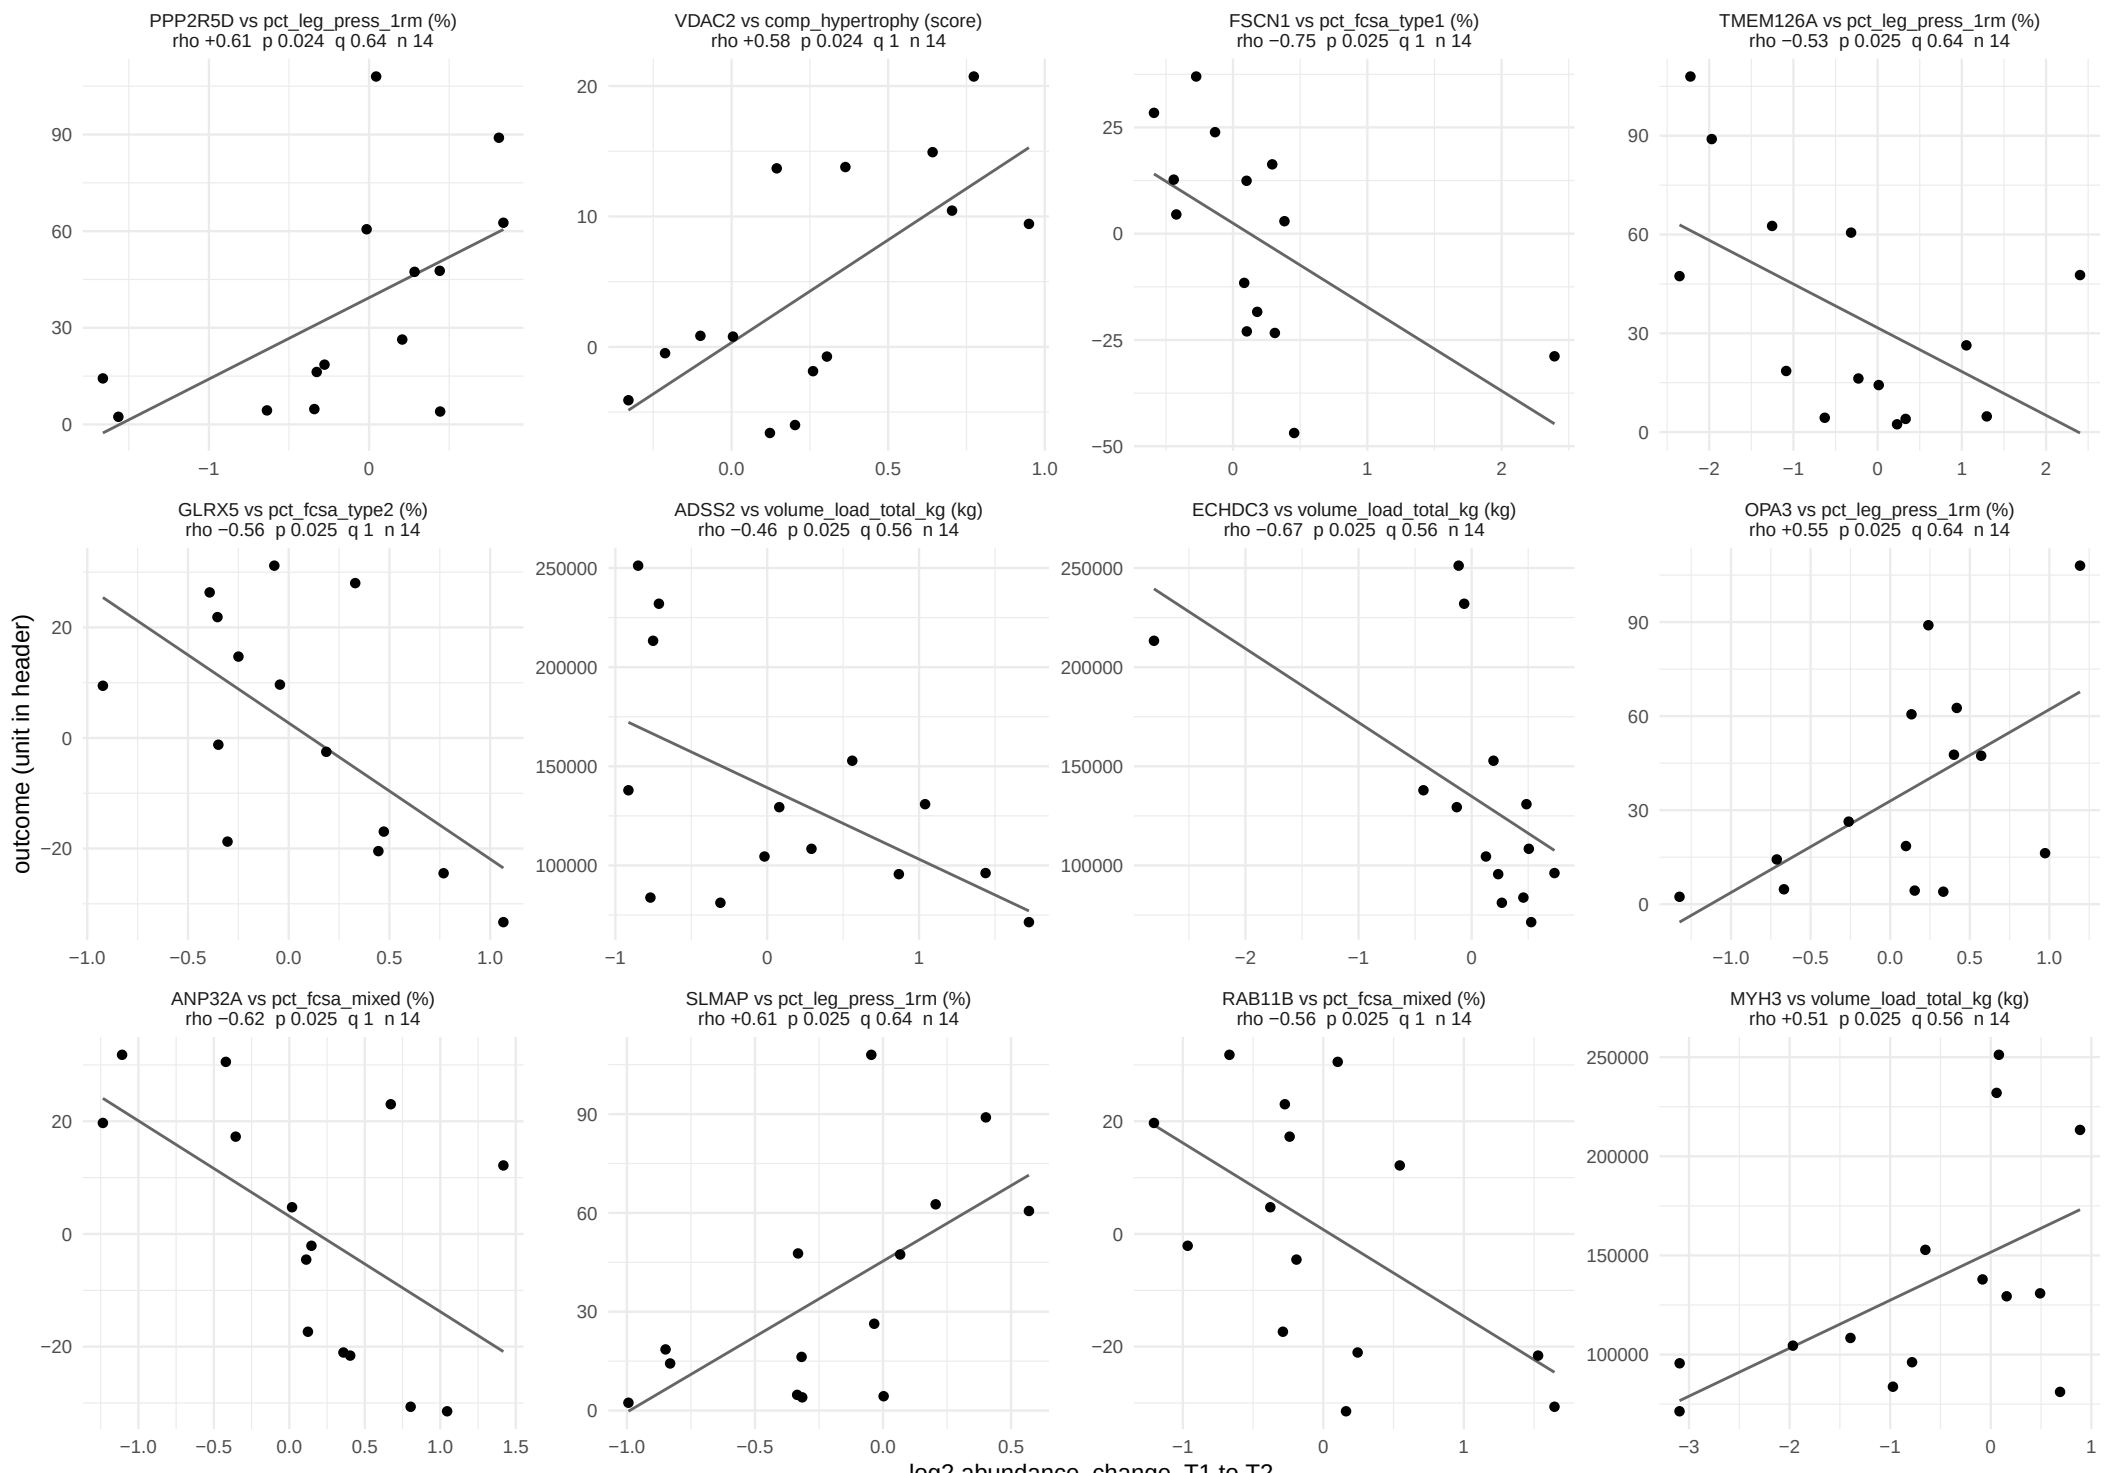

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, training window


605 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 25 of 51.

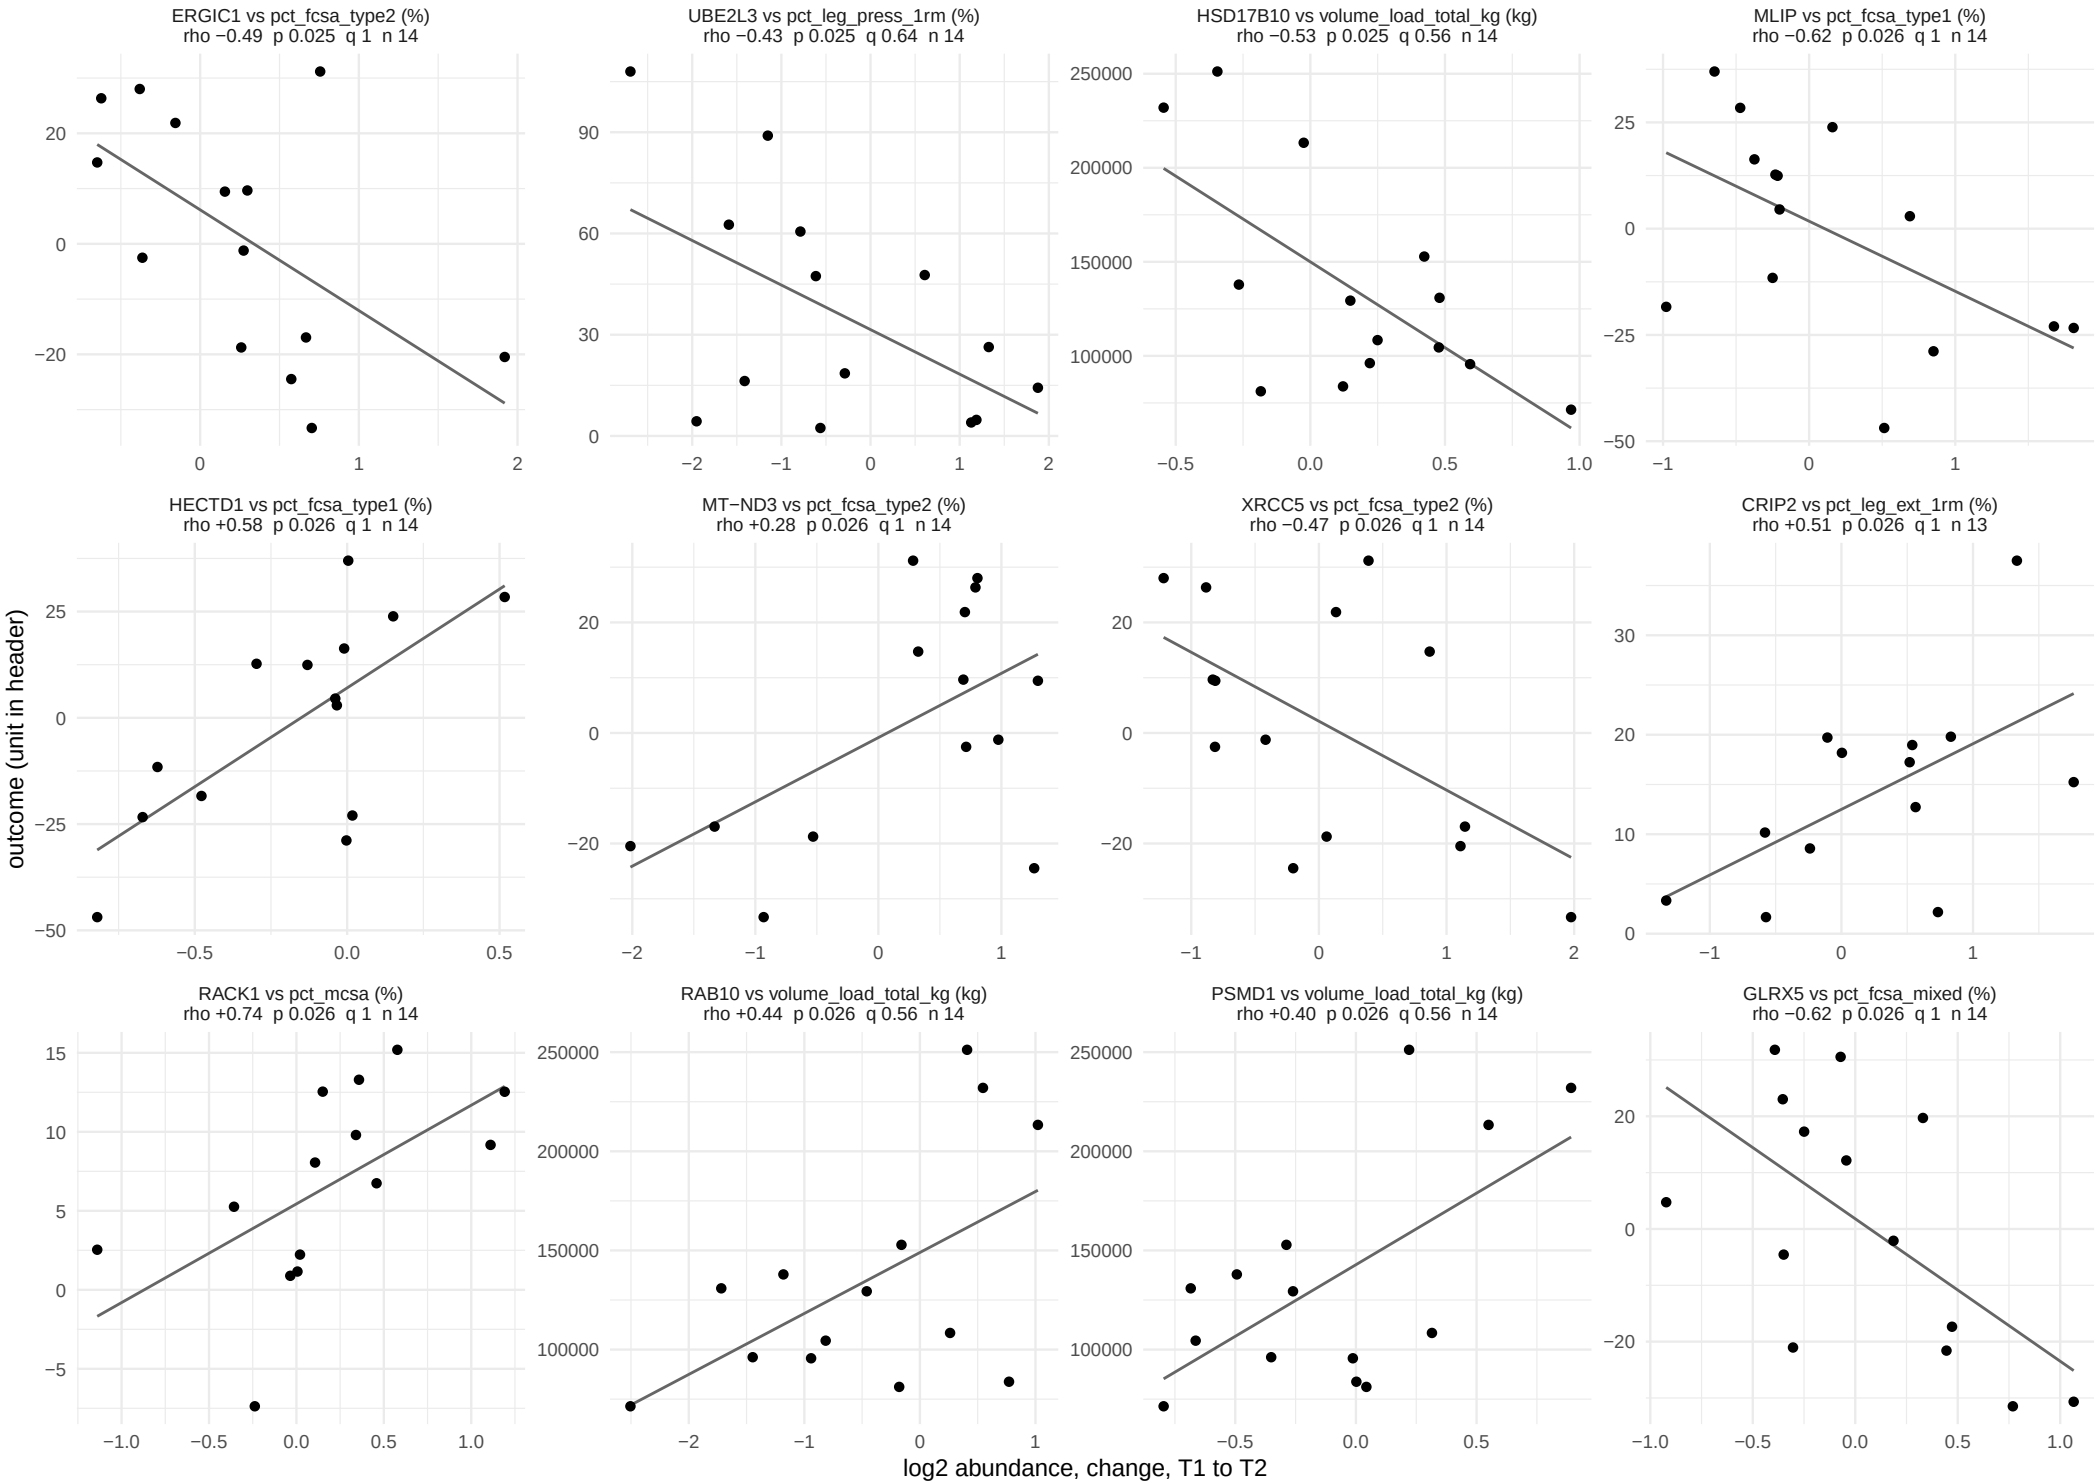

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, training window


605 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 26 of 51.

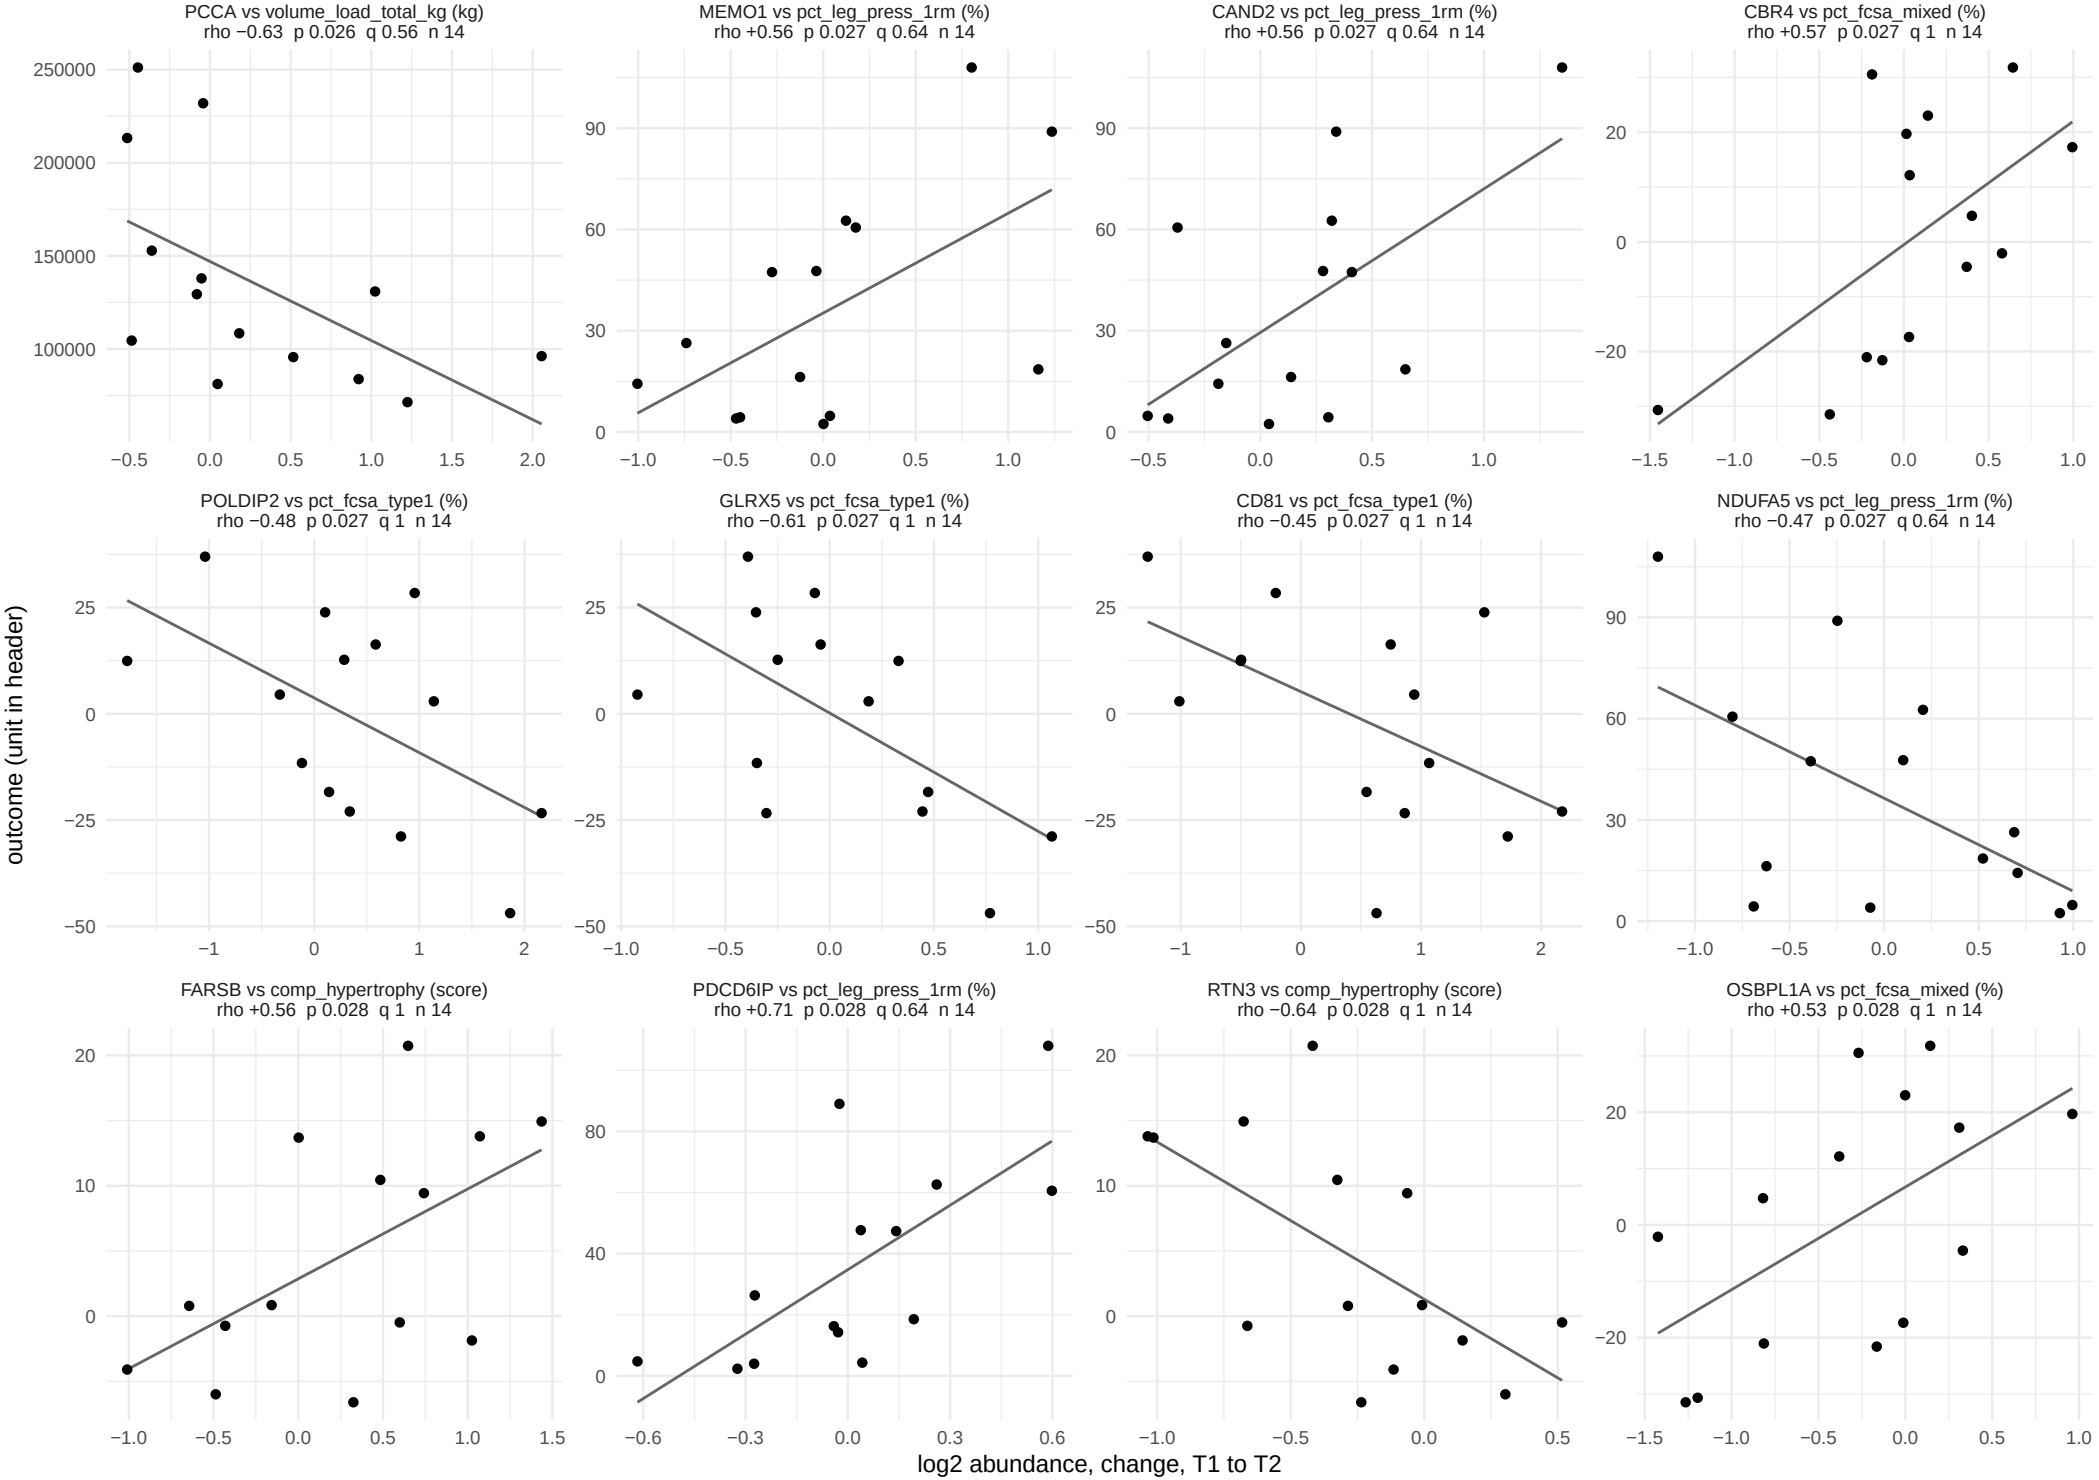

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, training window


605 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 27 of 51.

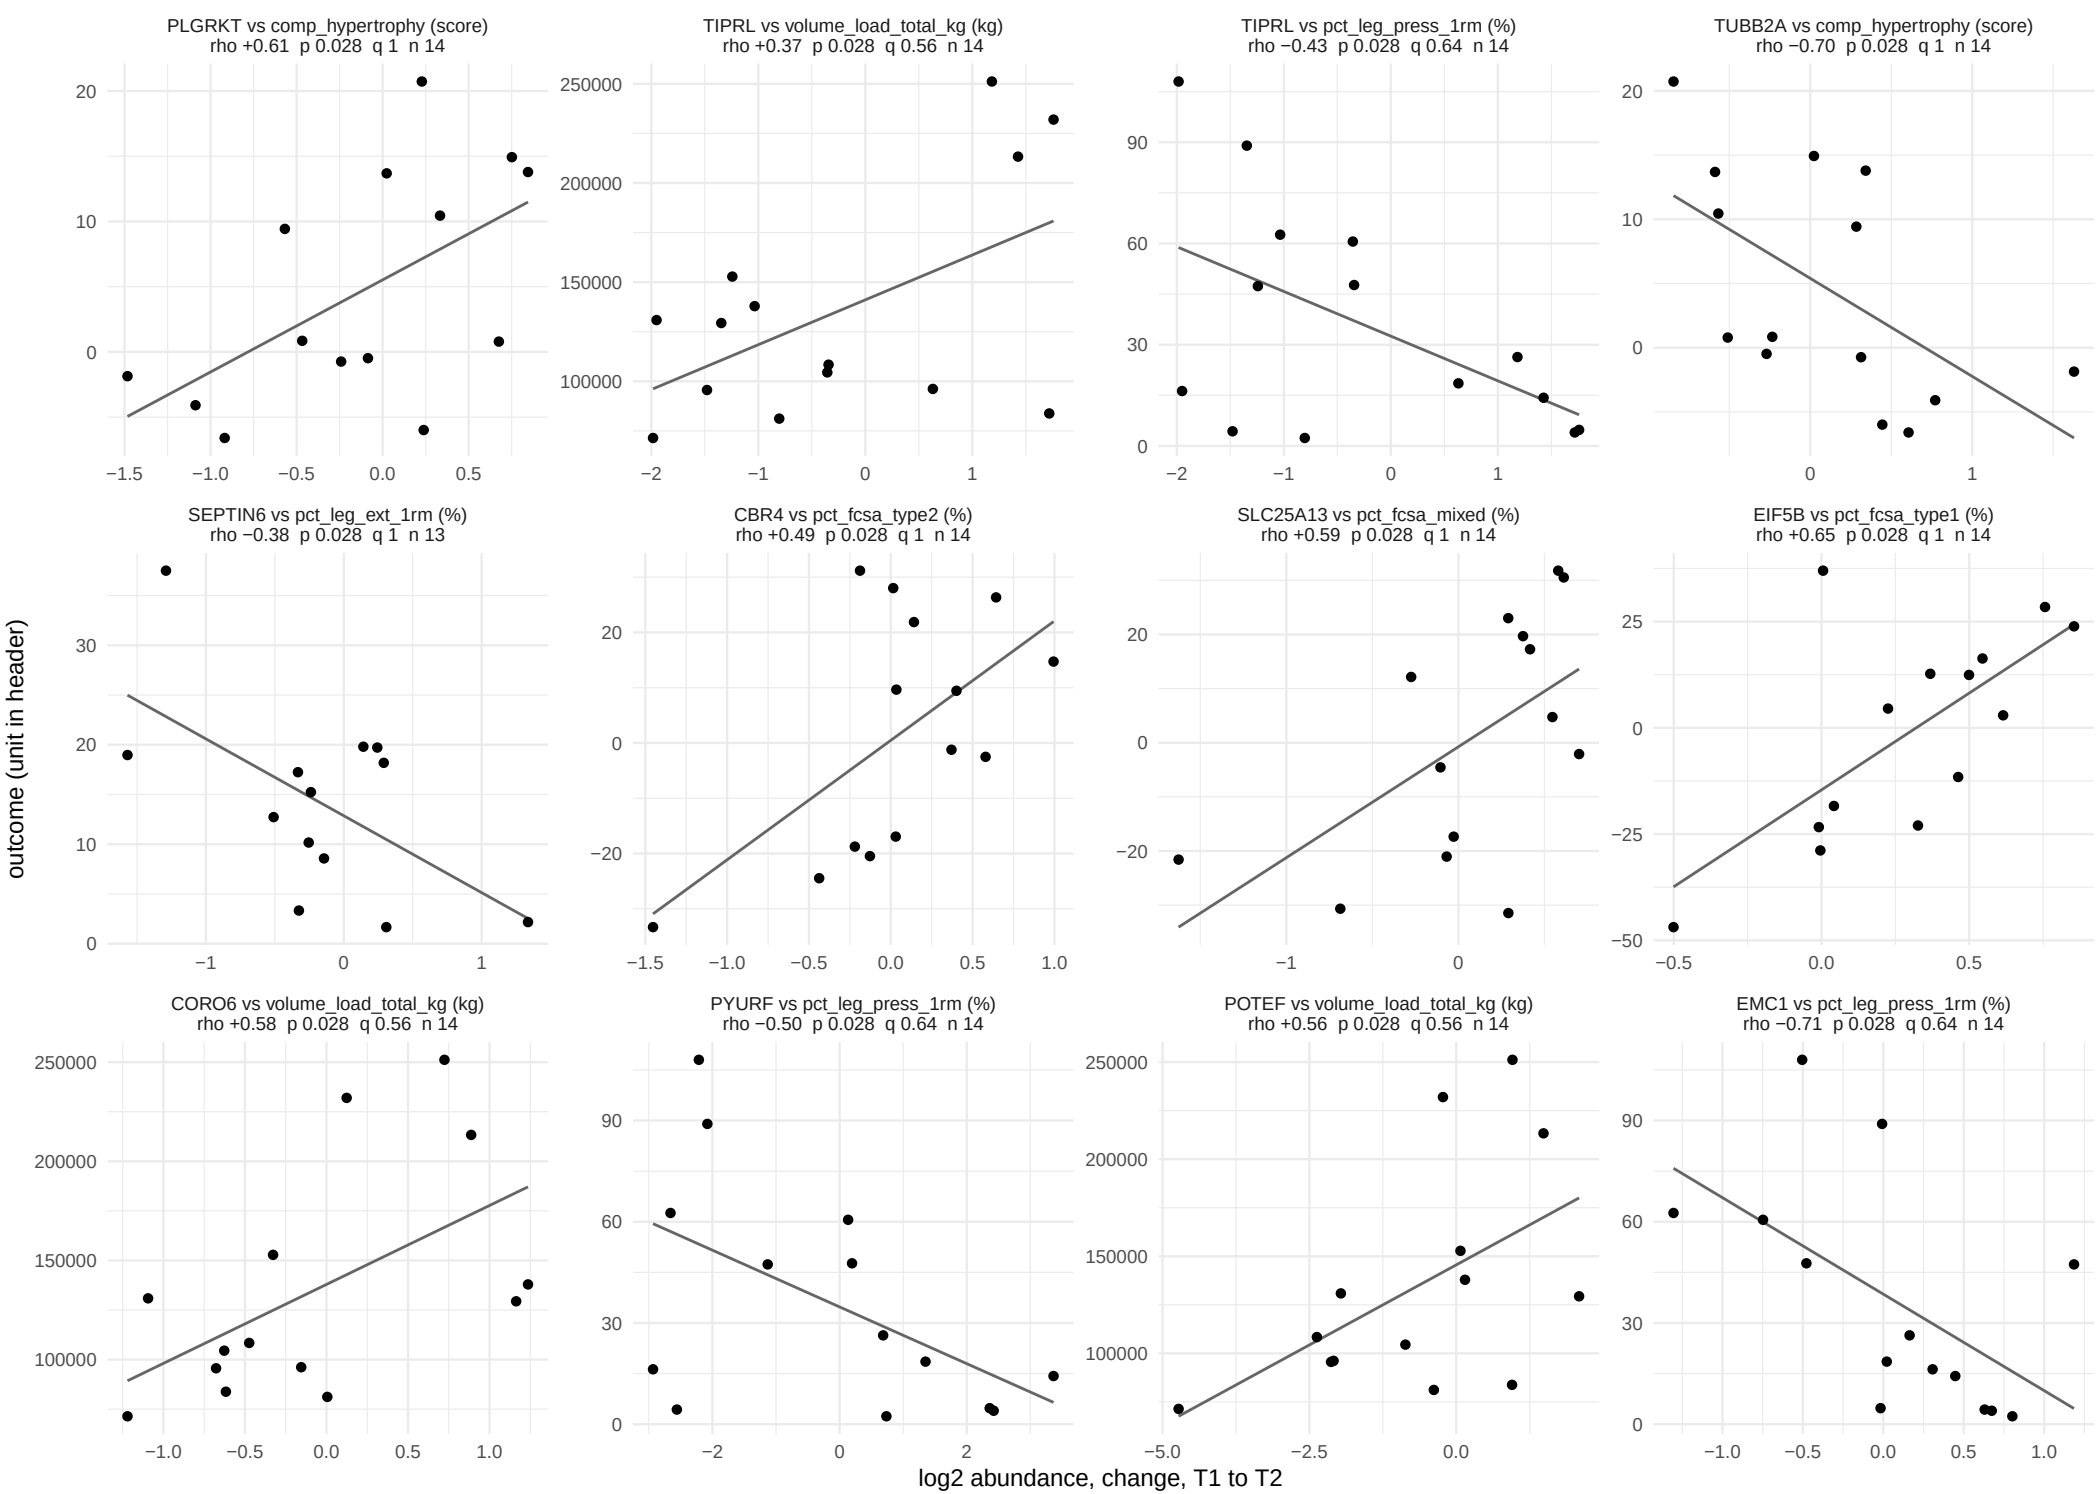

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, training window


605 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 28 of 51.

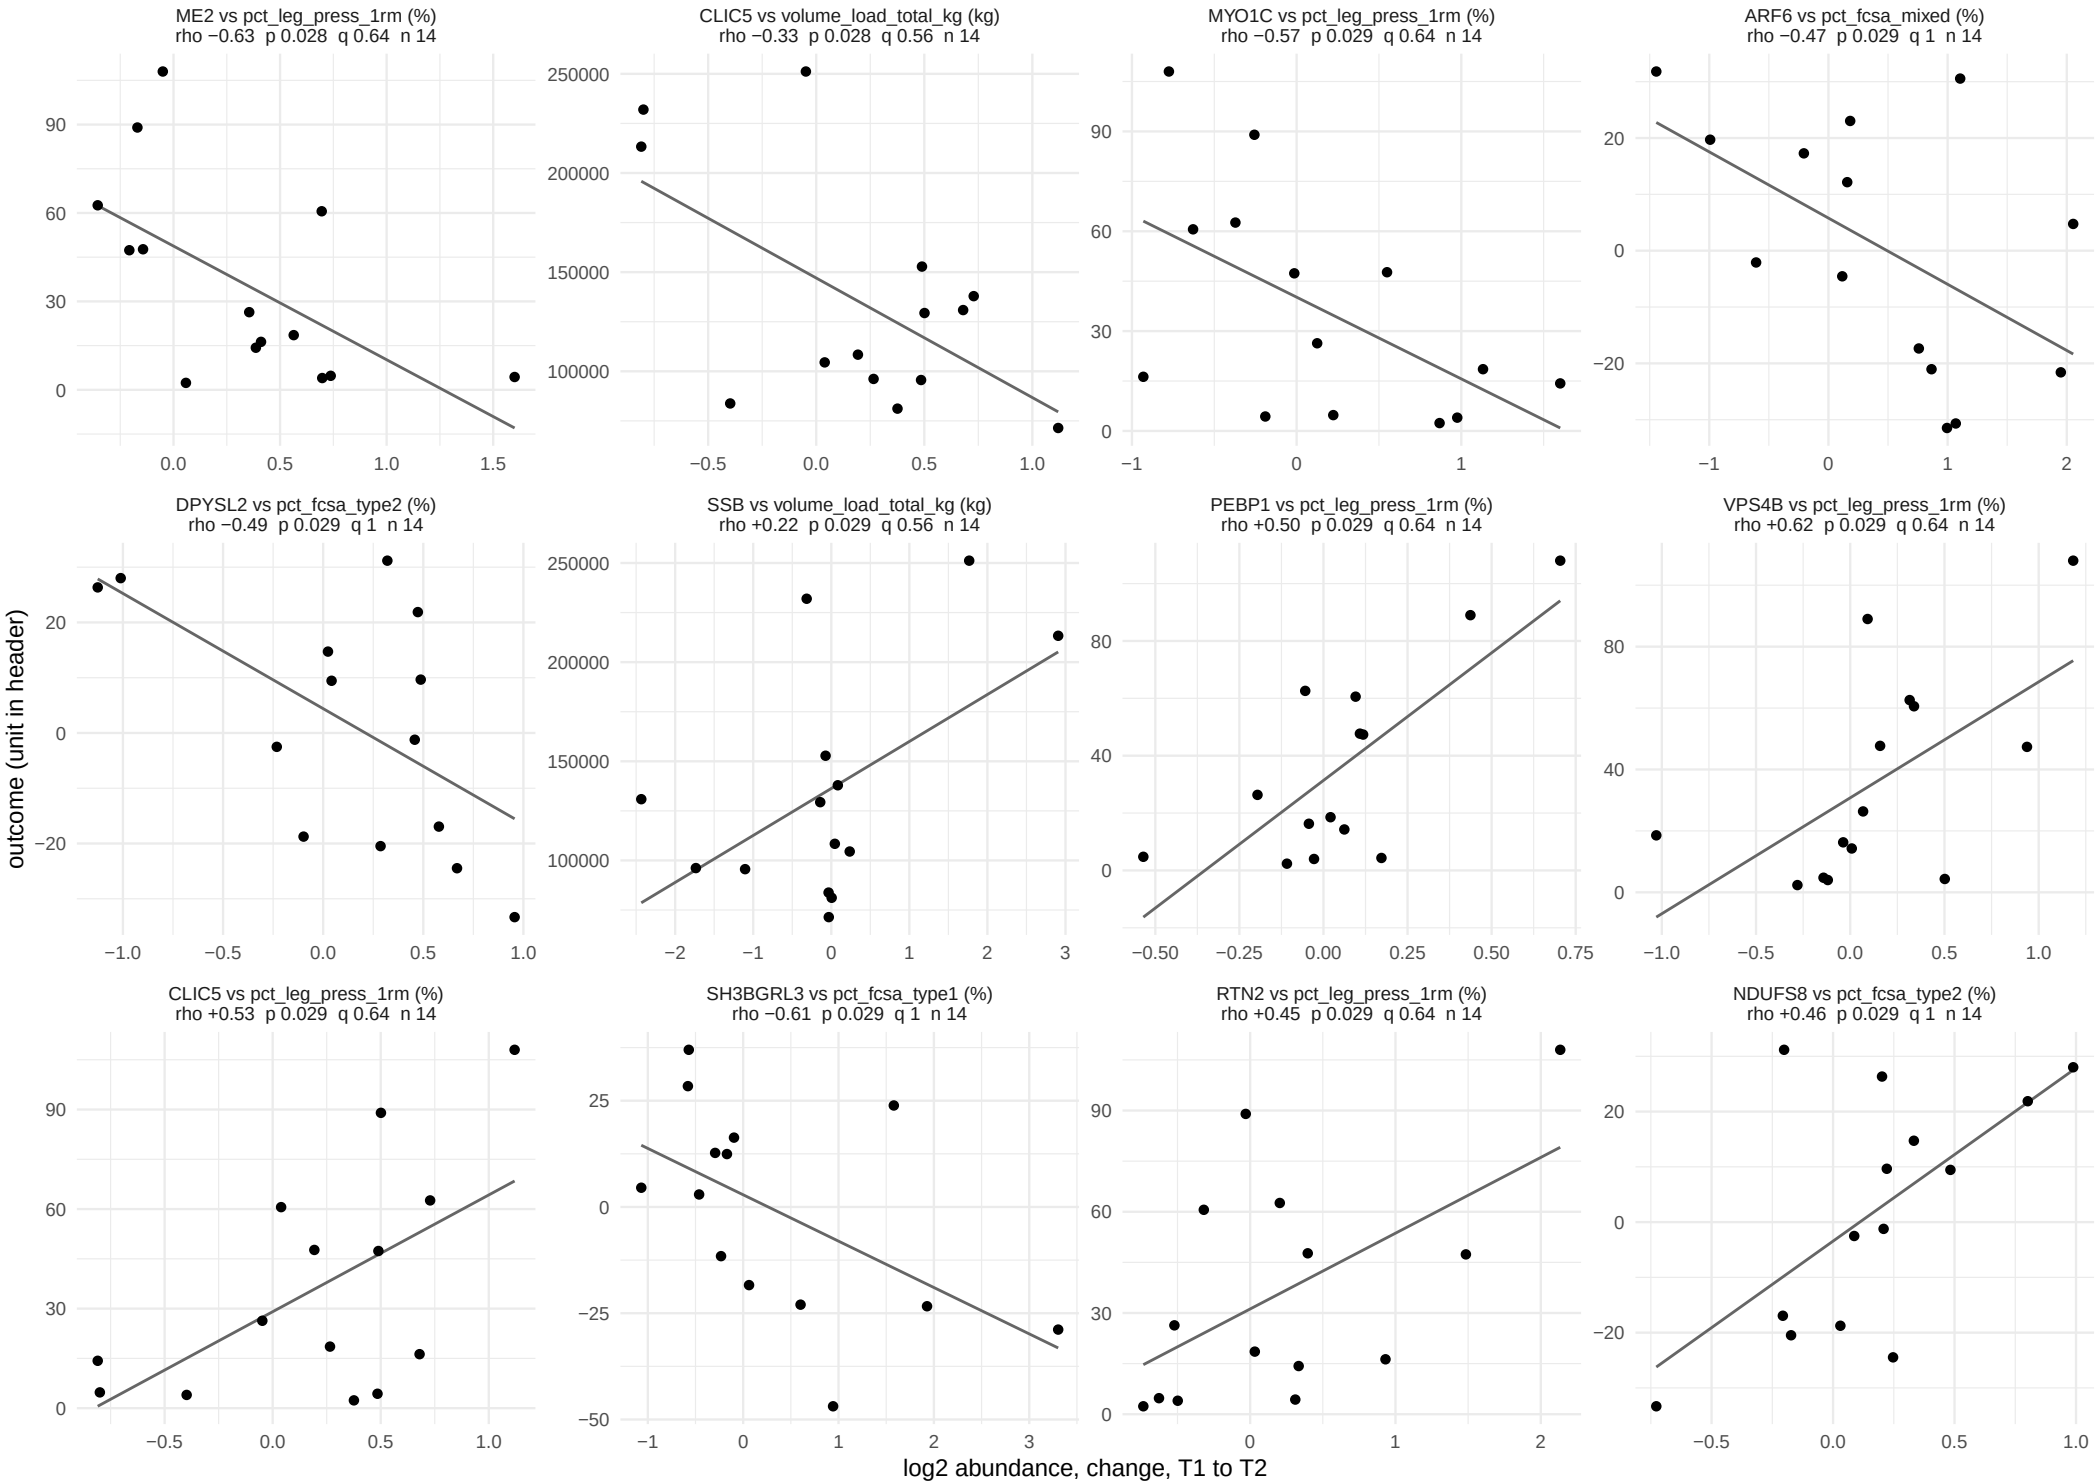

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, training window


605 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 29 of 51.

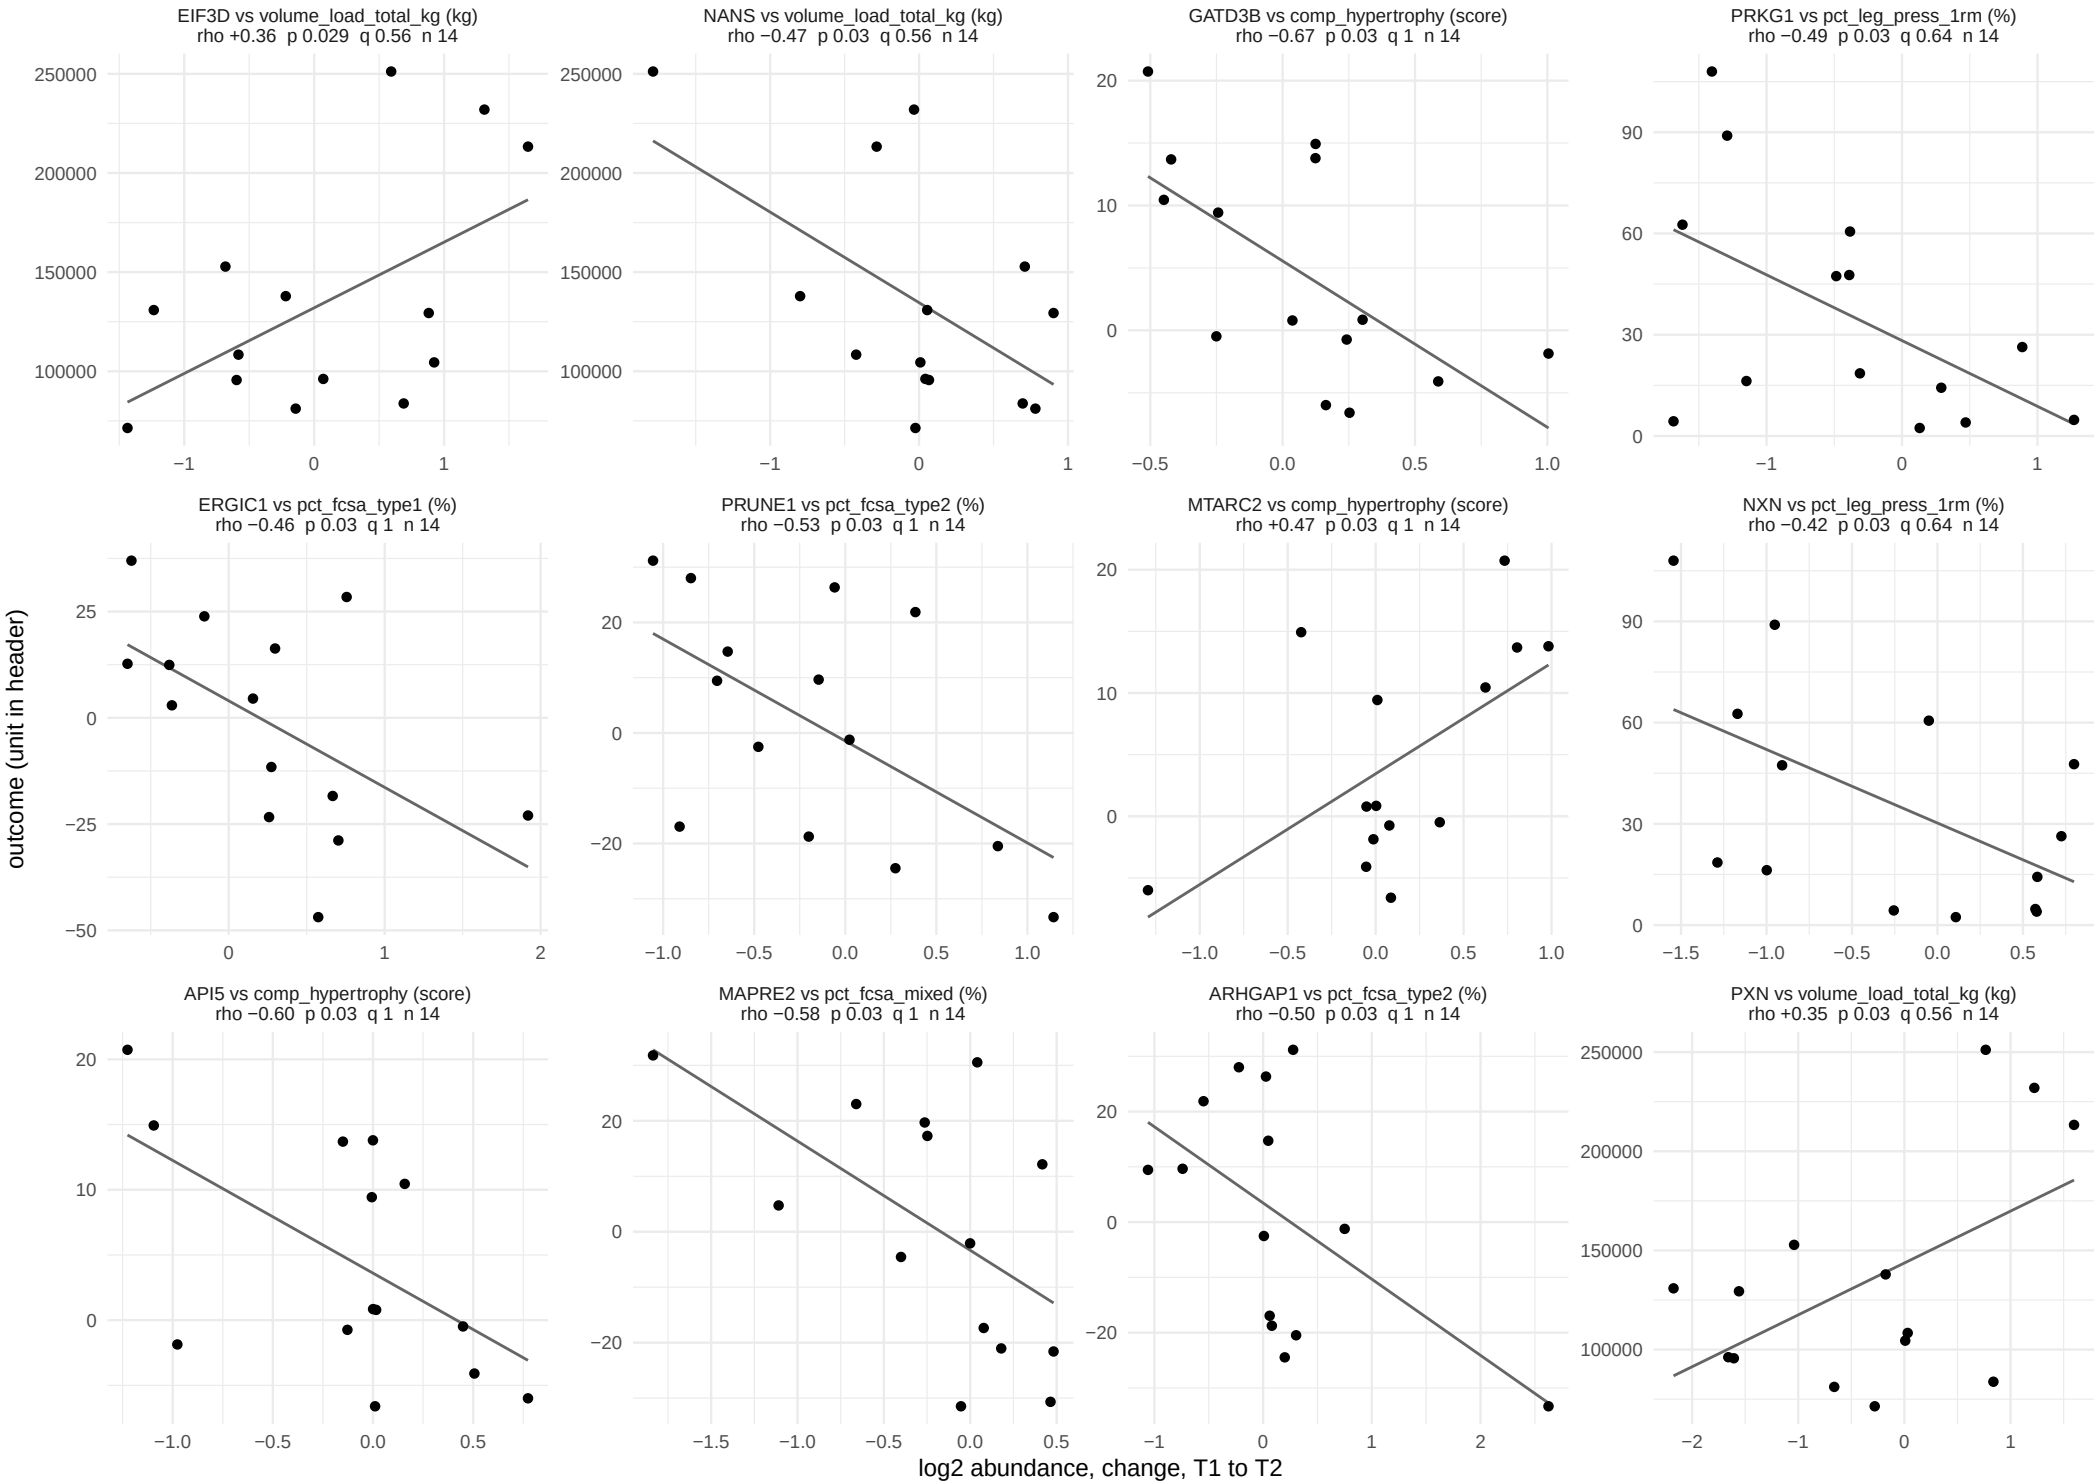

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, training window


605 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 30 of 51.

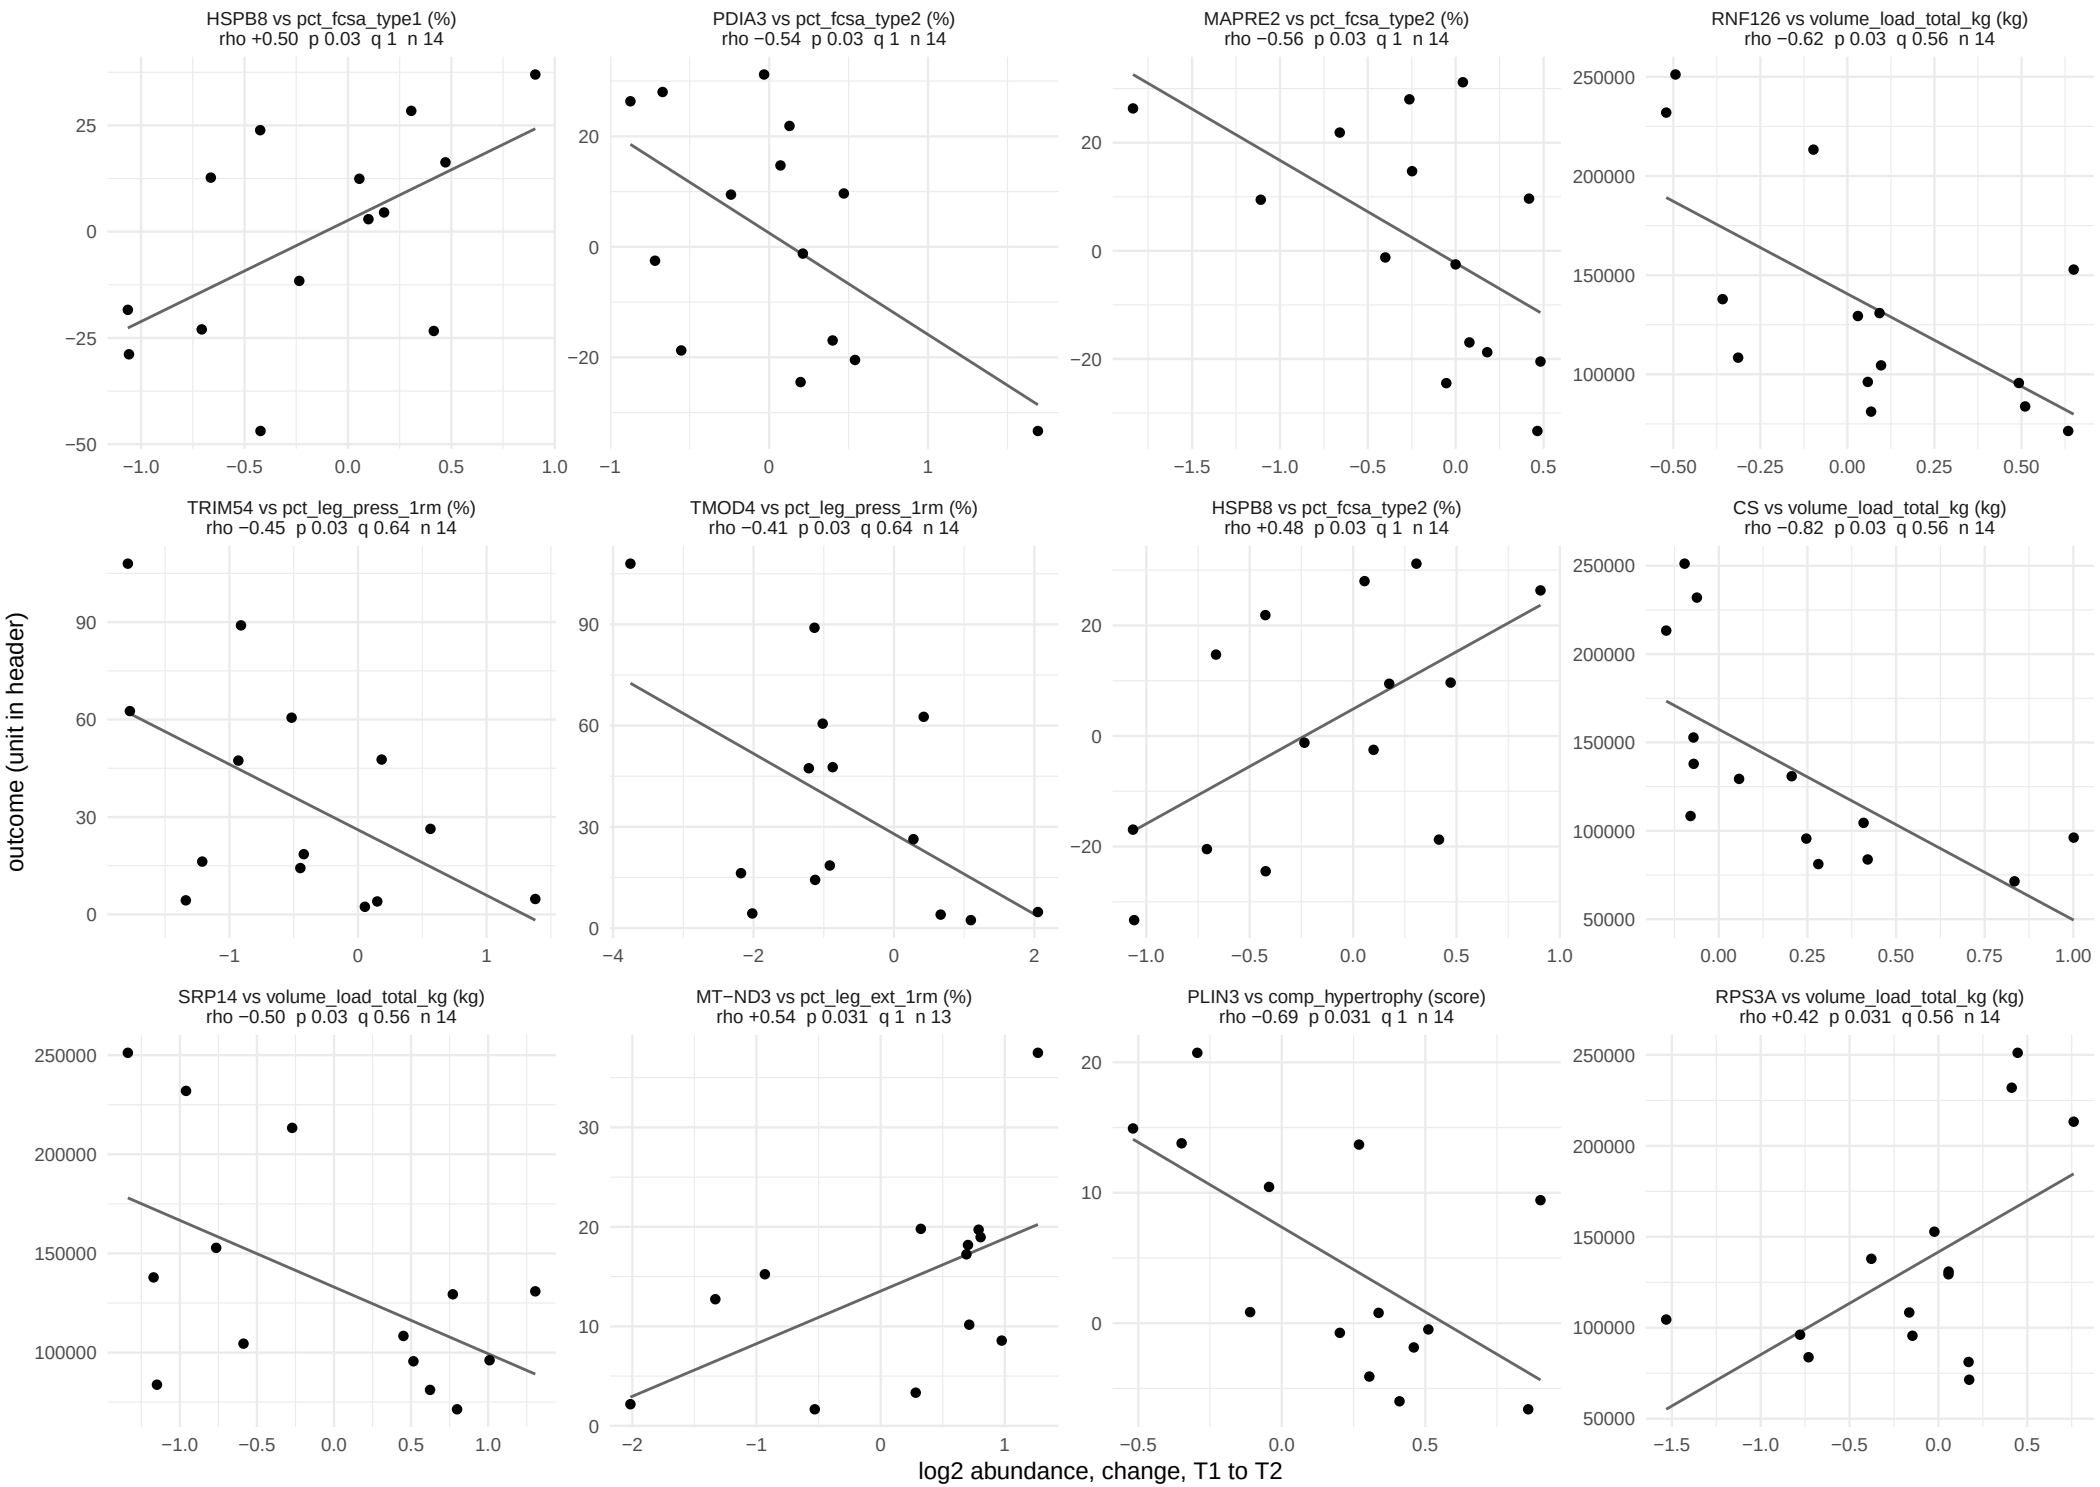

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, training window


605 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 31 of 51.

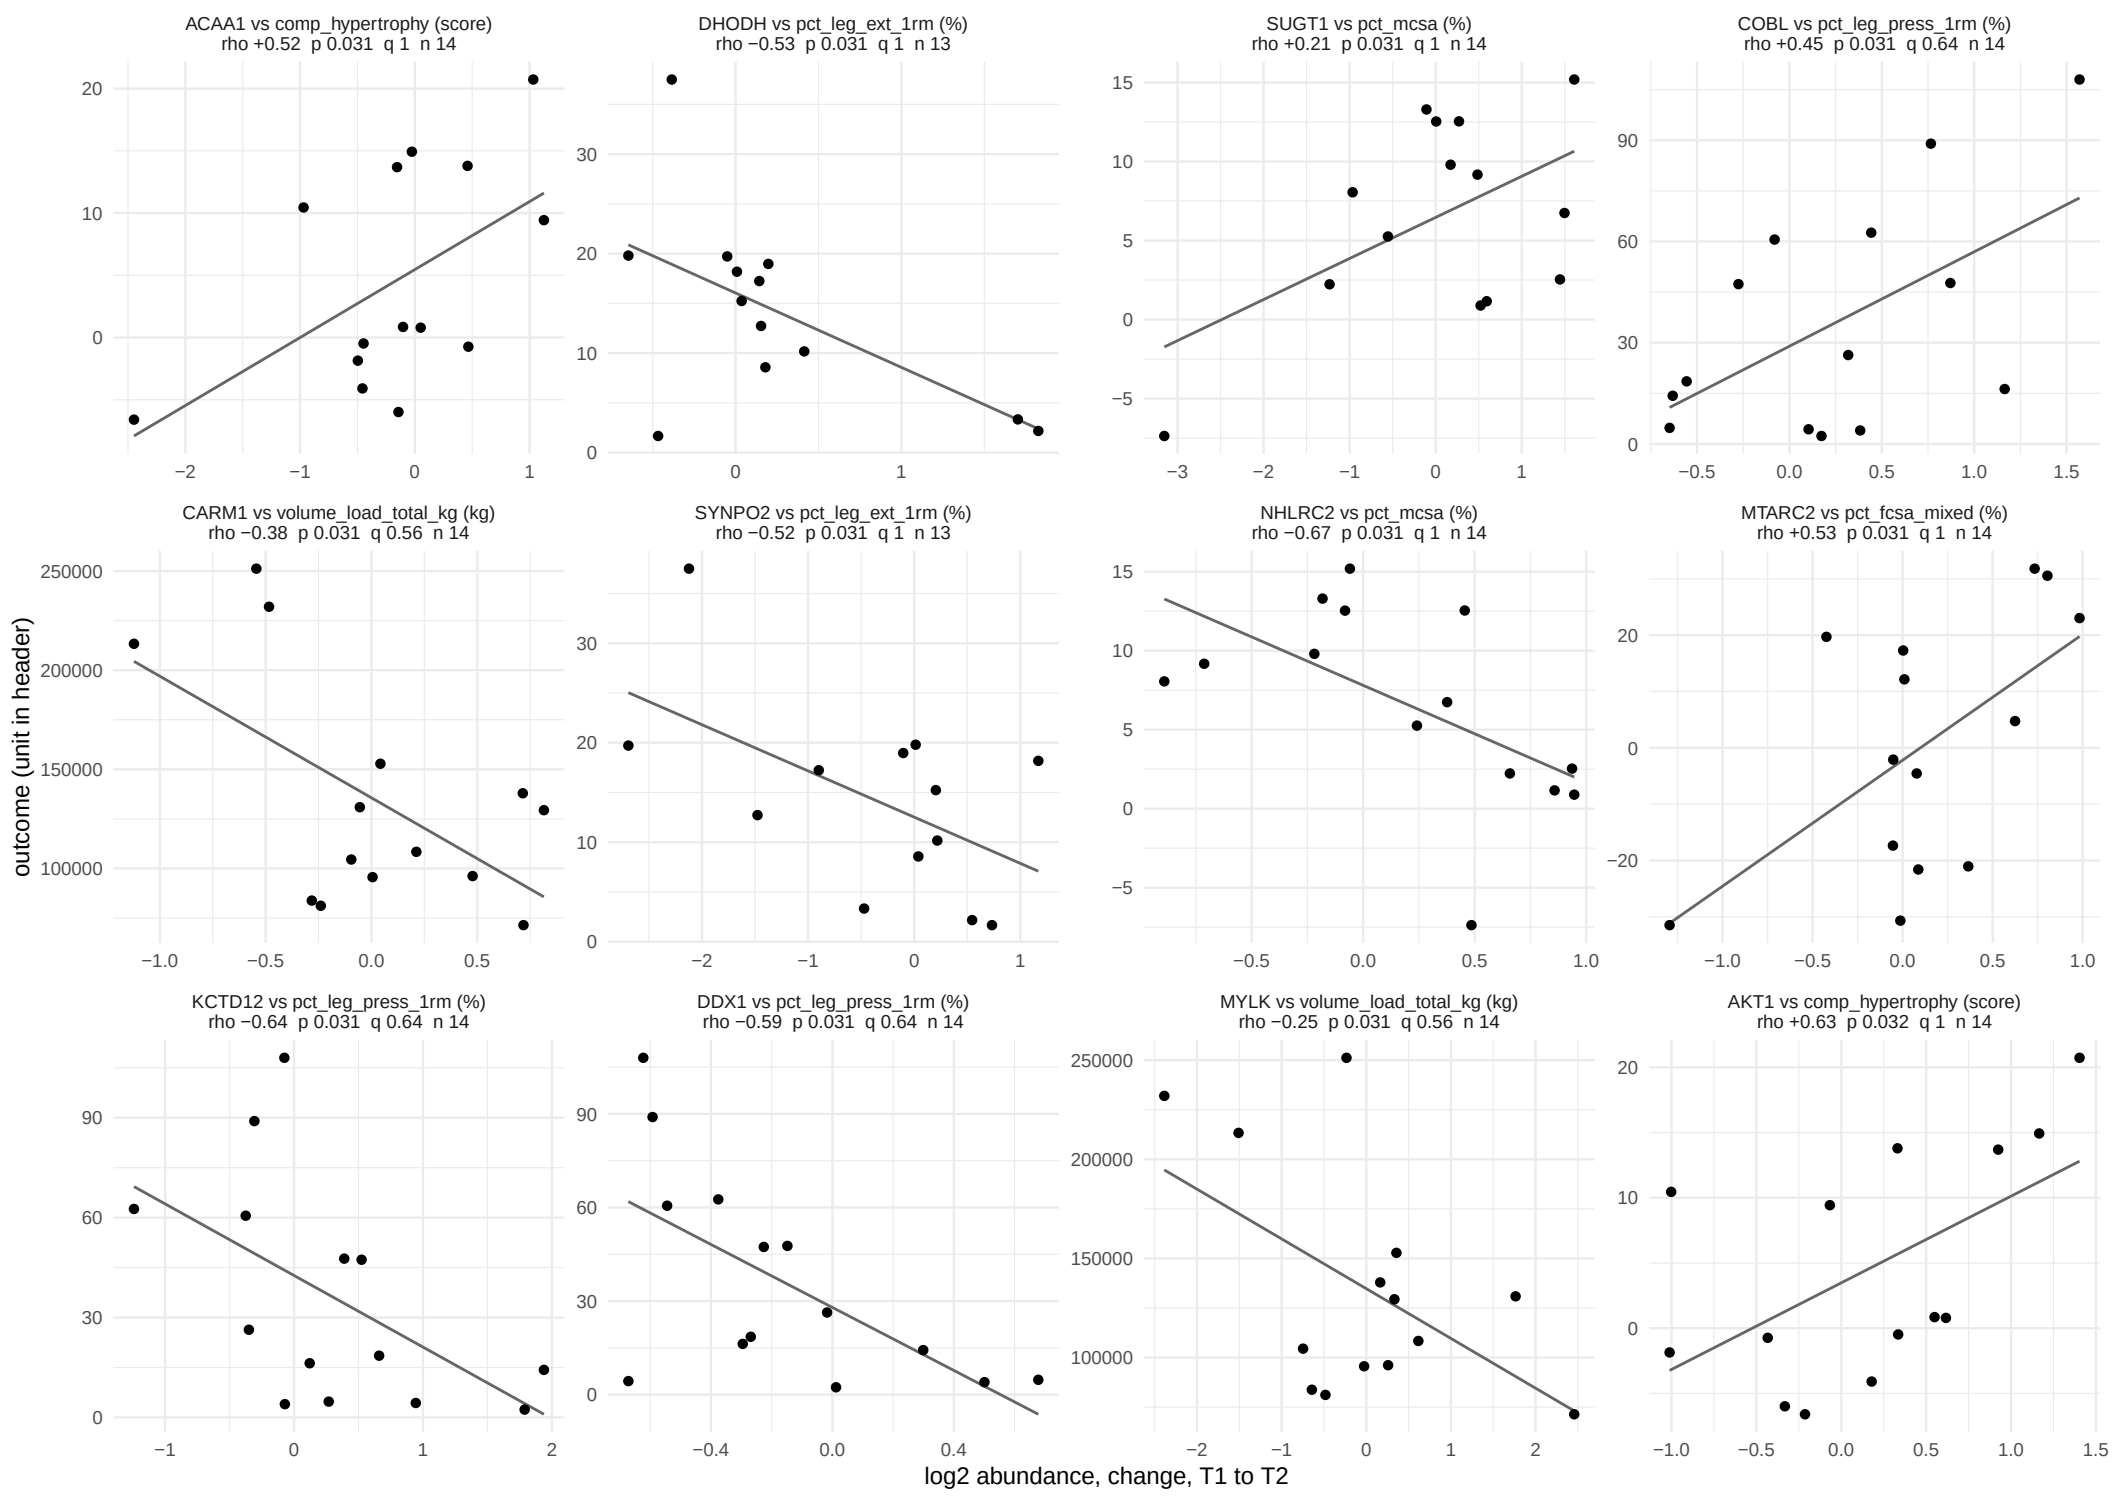

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, training window


605 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 32 of 51.

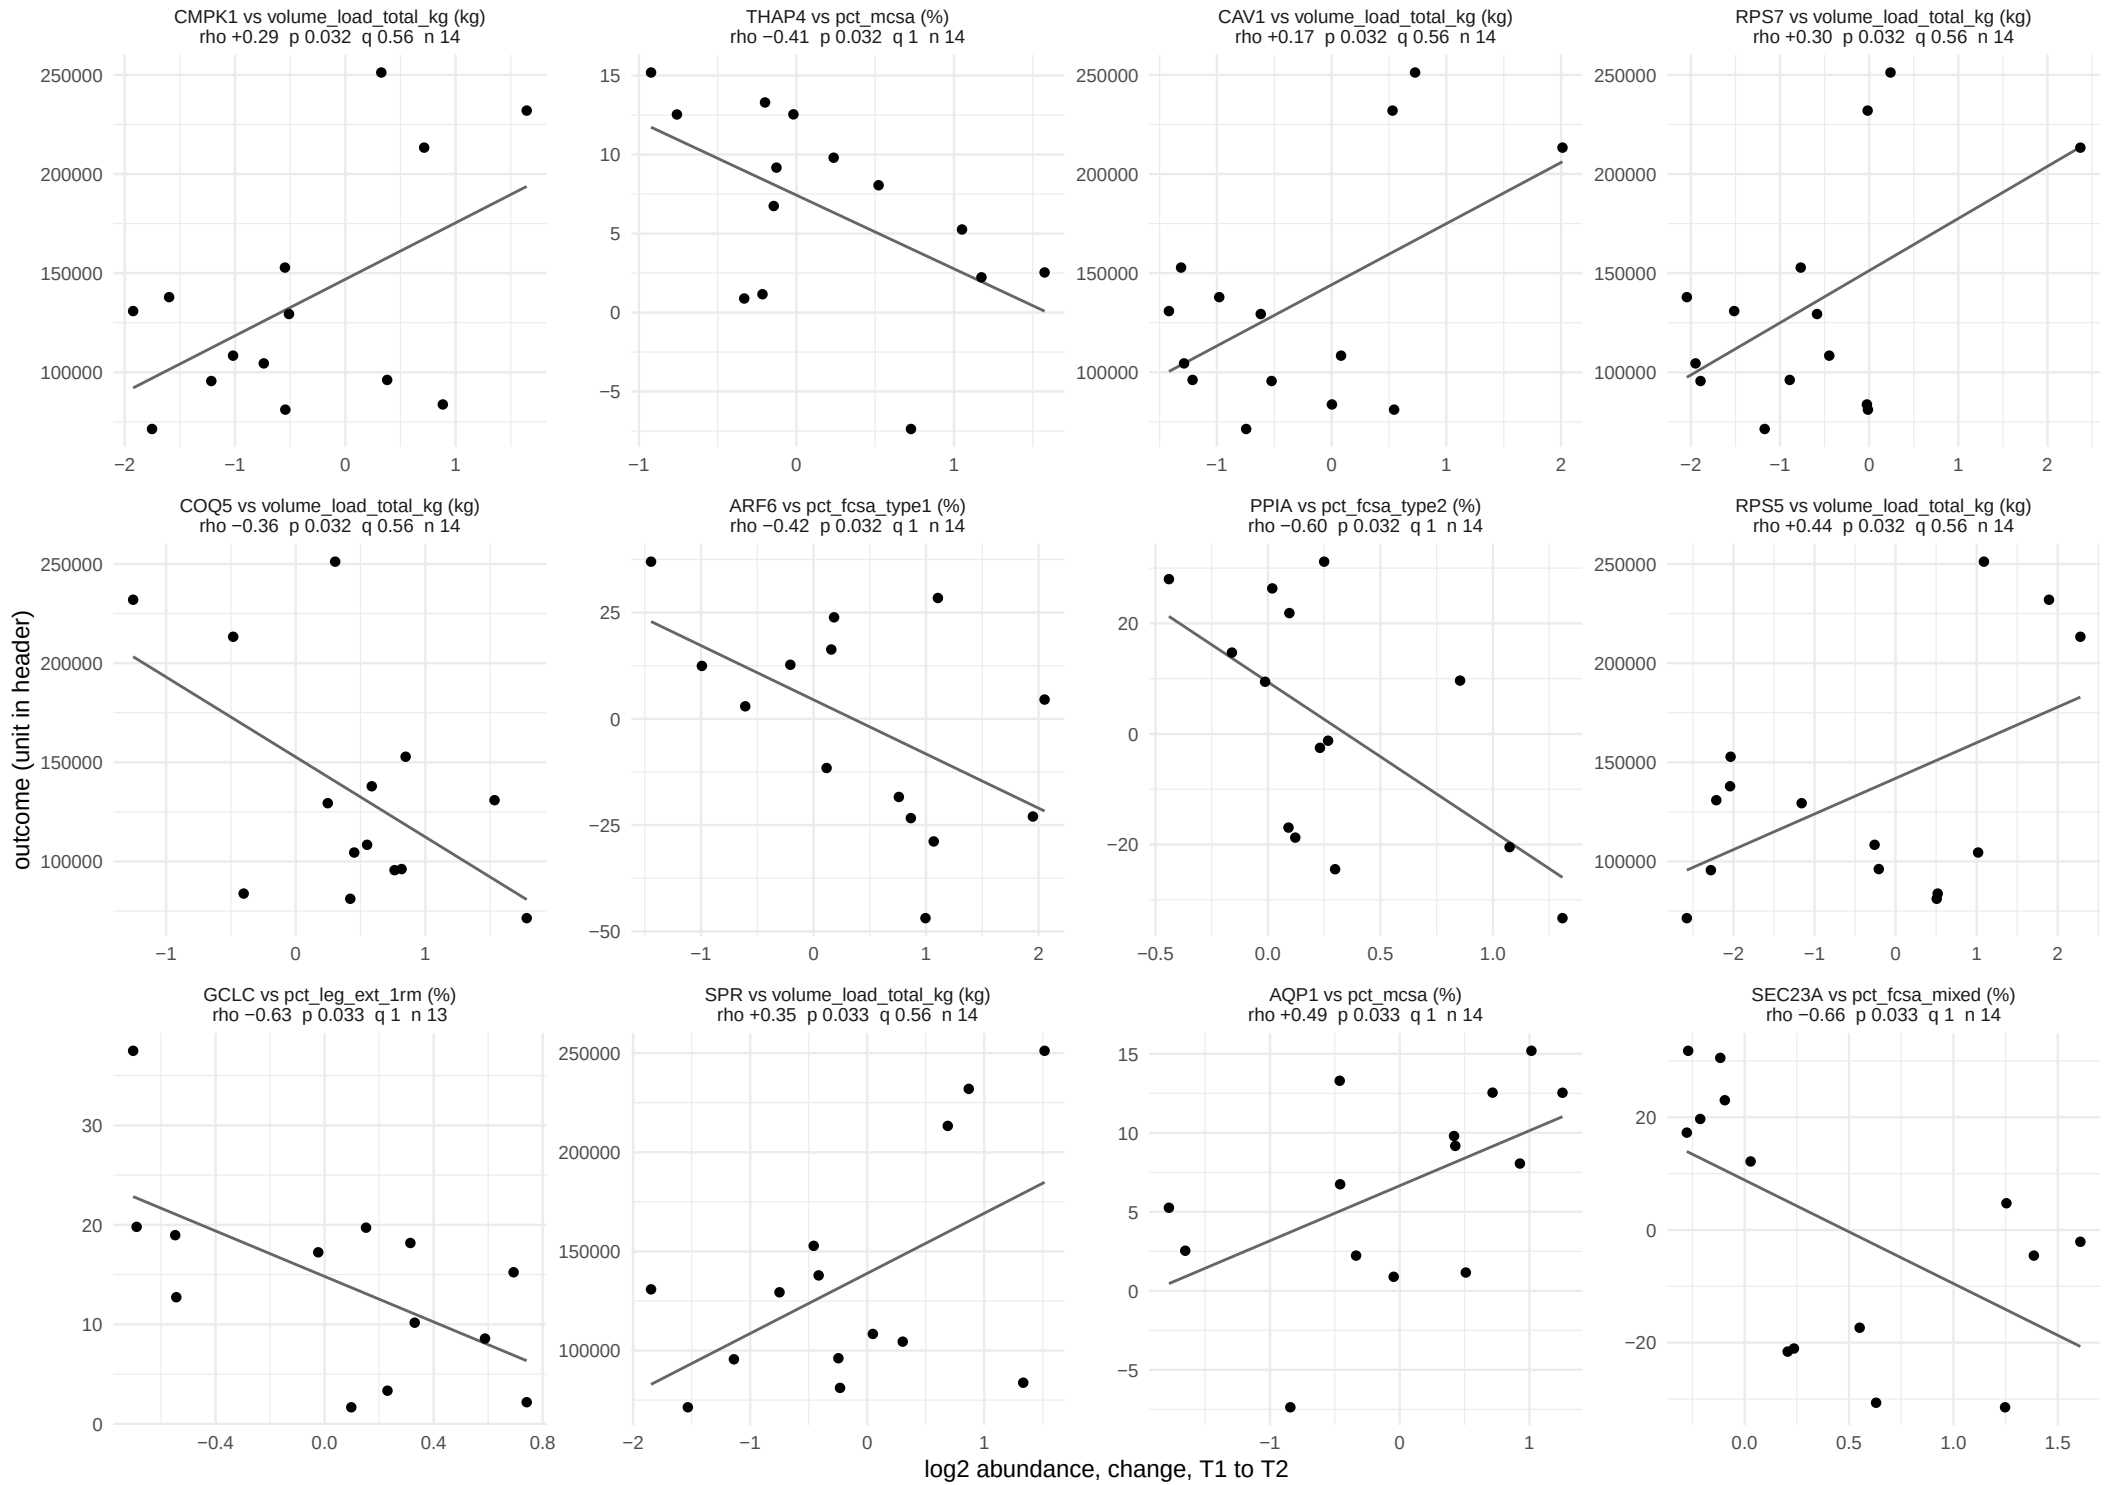

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, training window


605 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 33 of 51.

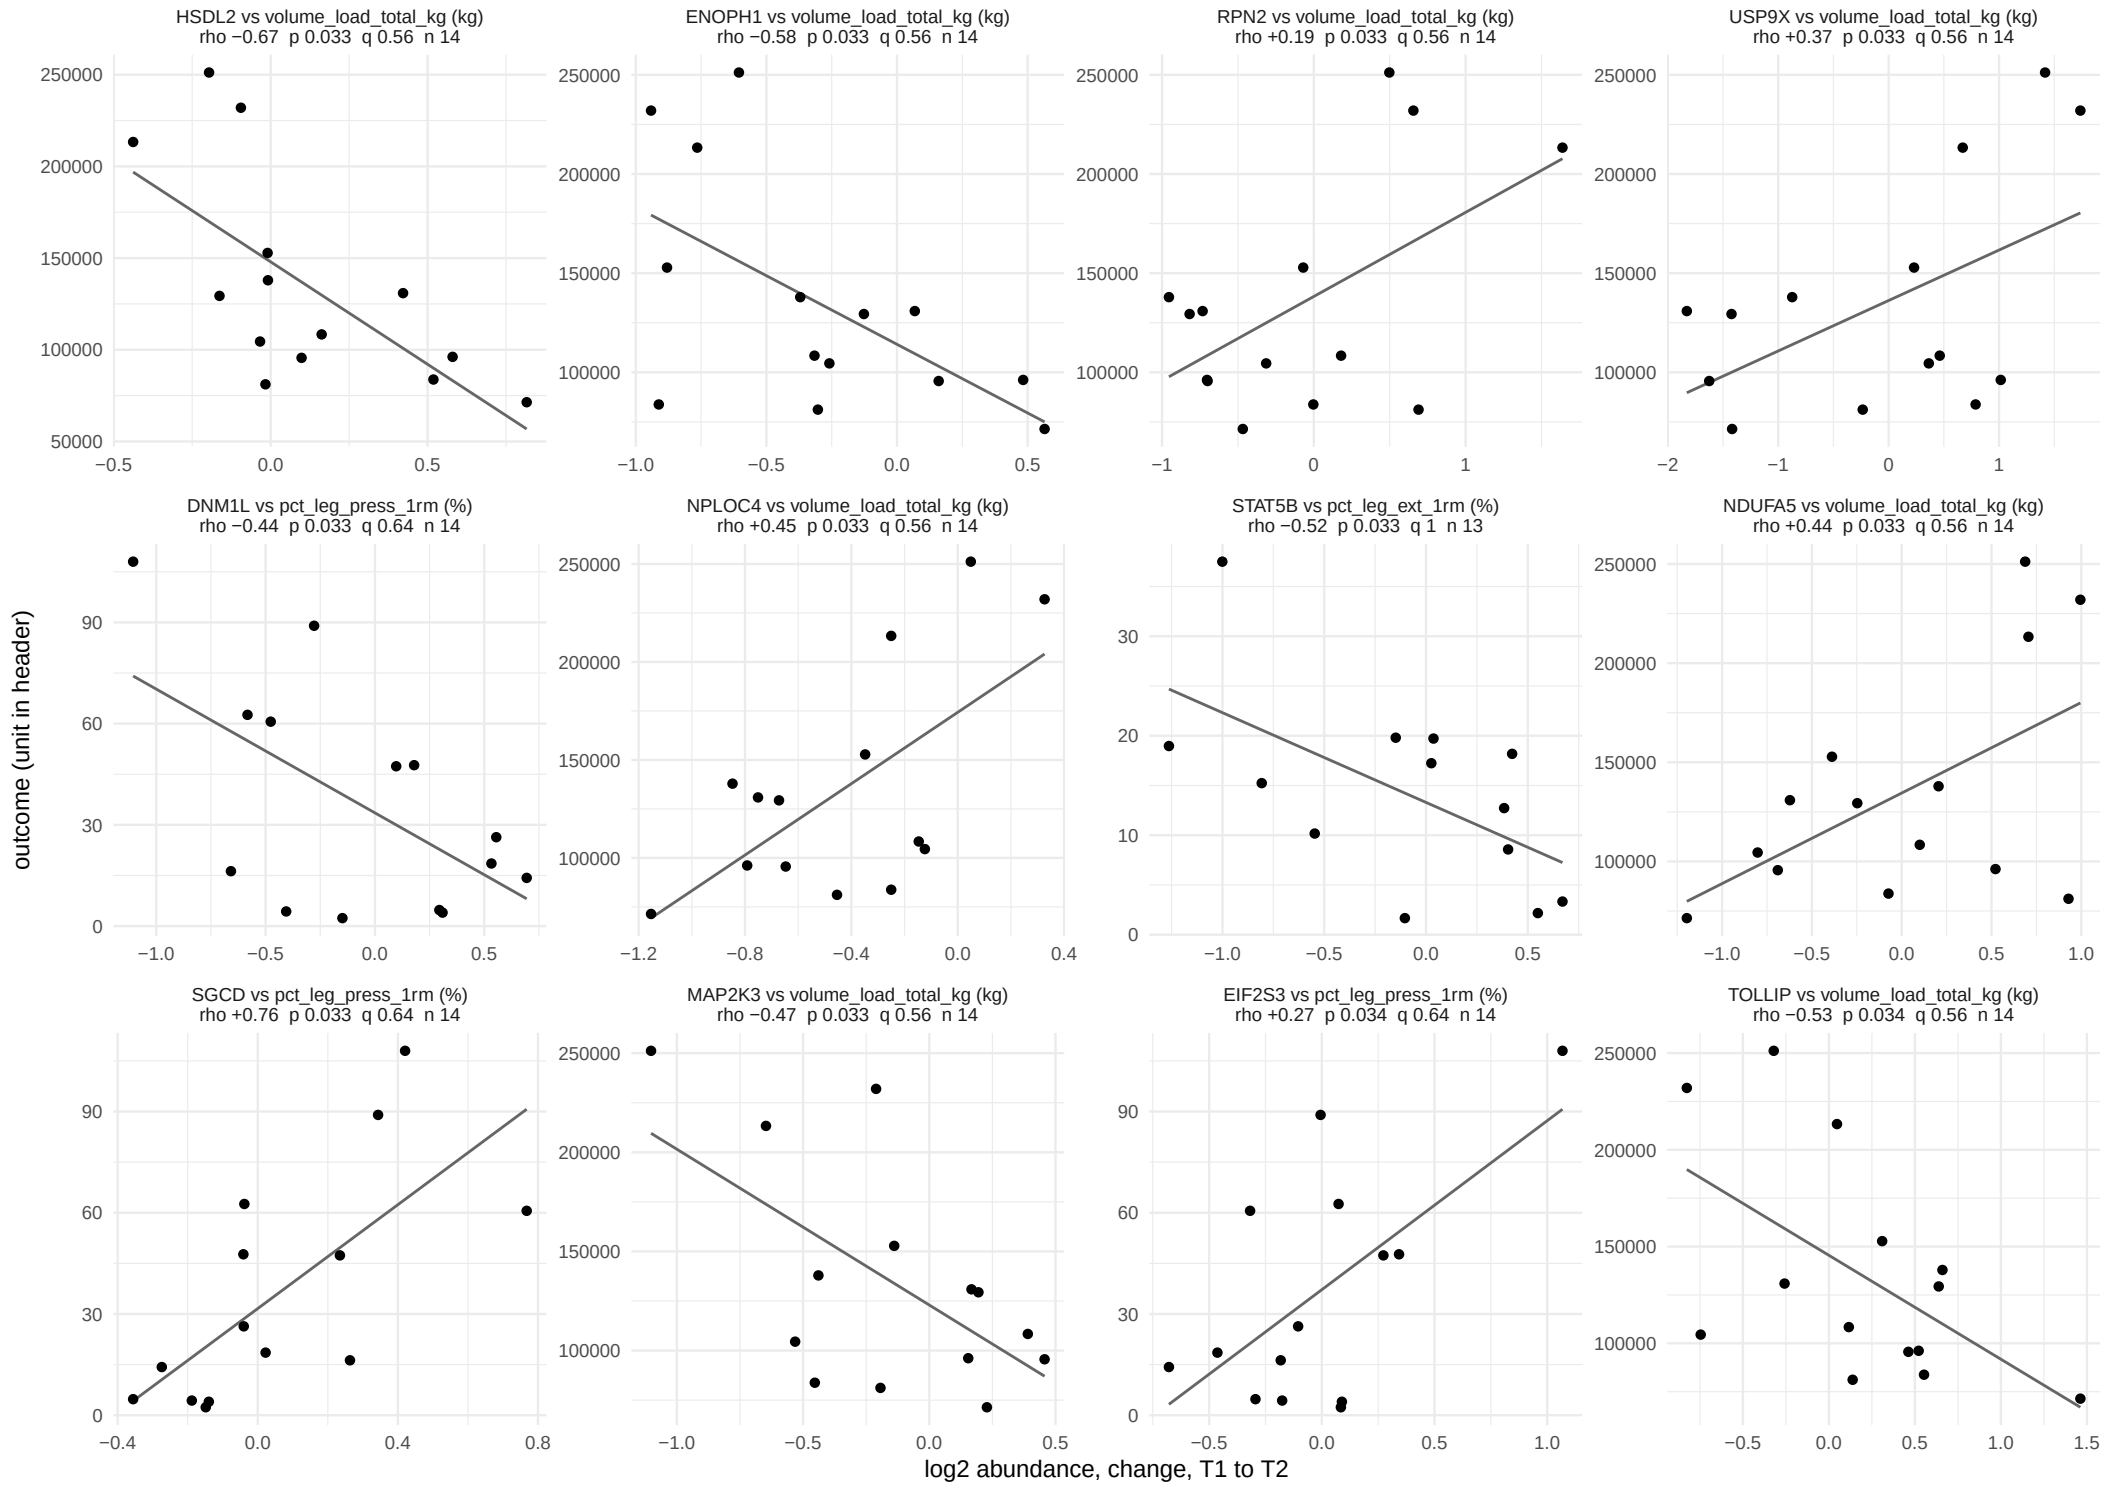

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, training window


605 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 34 of 51.

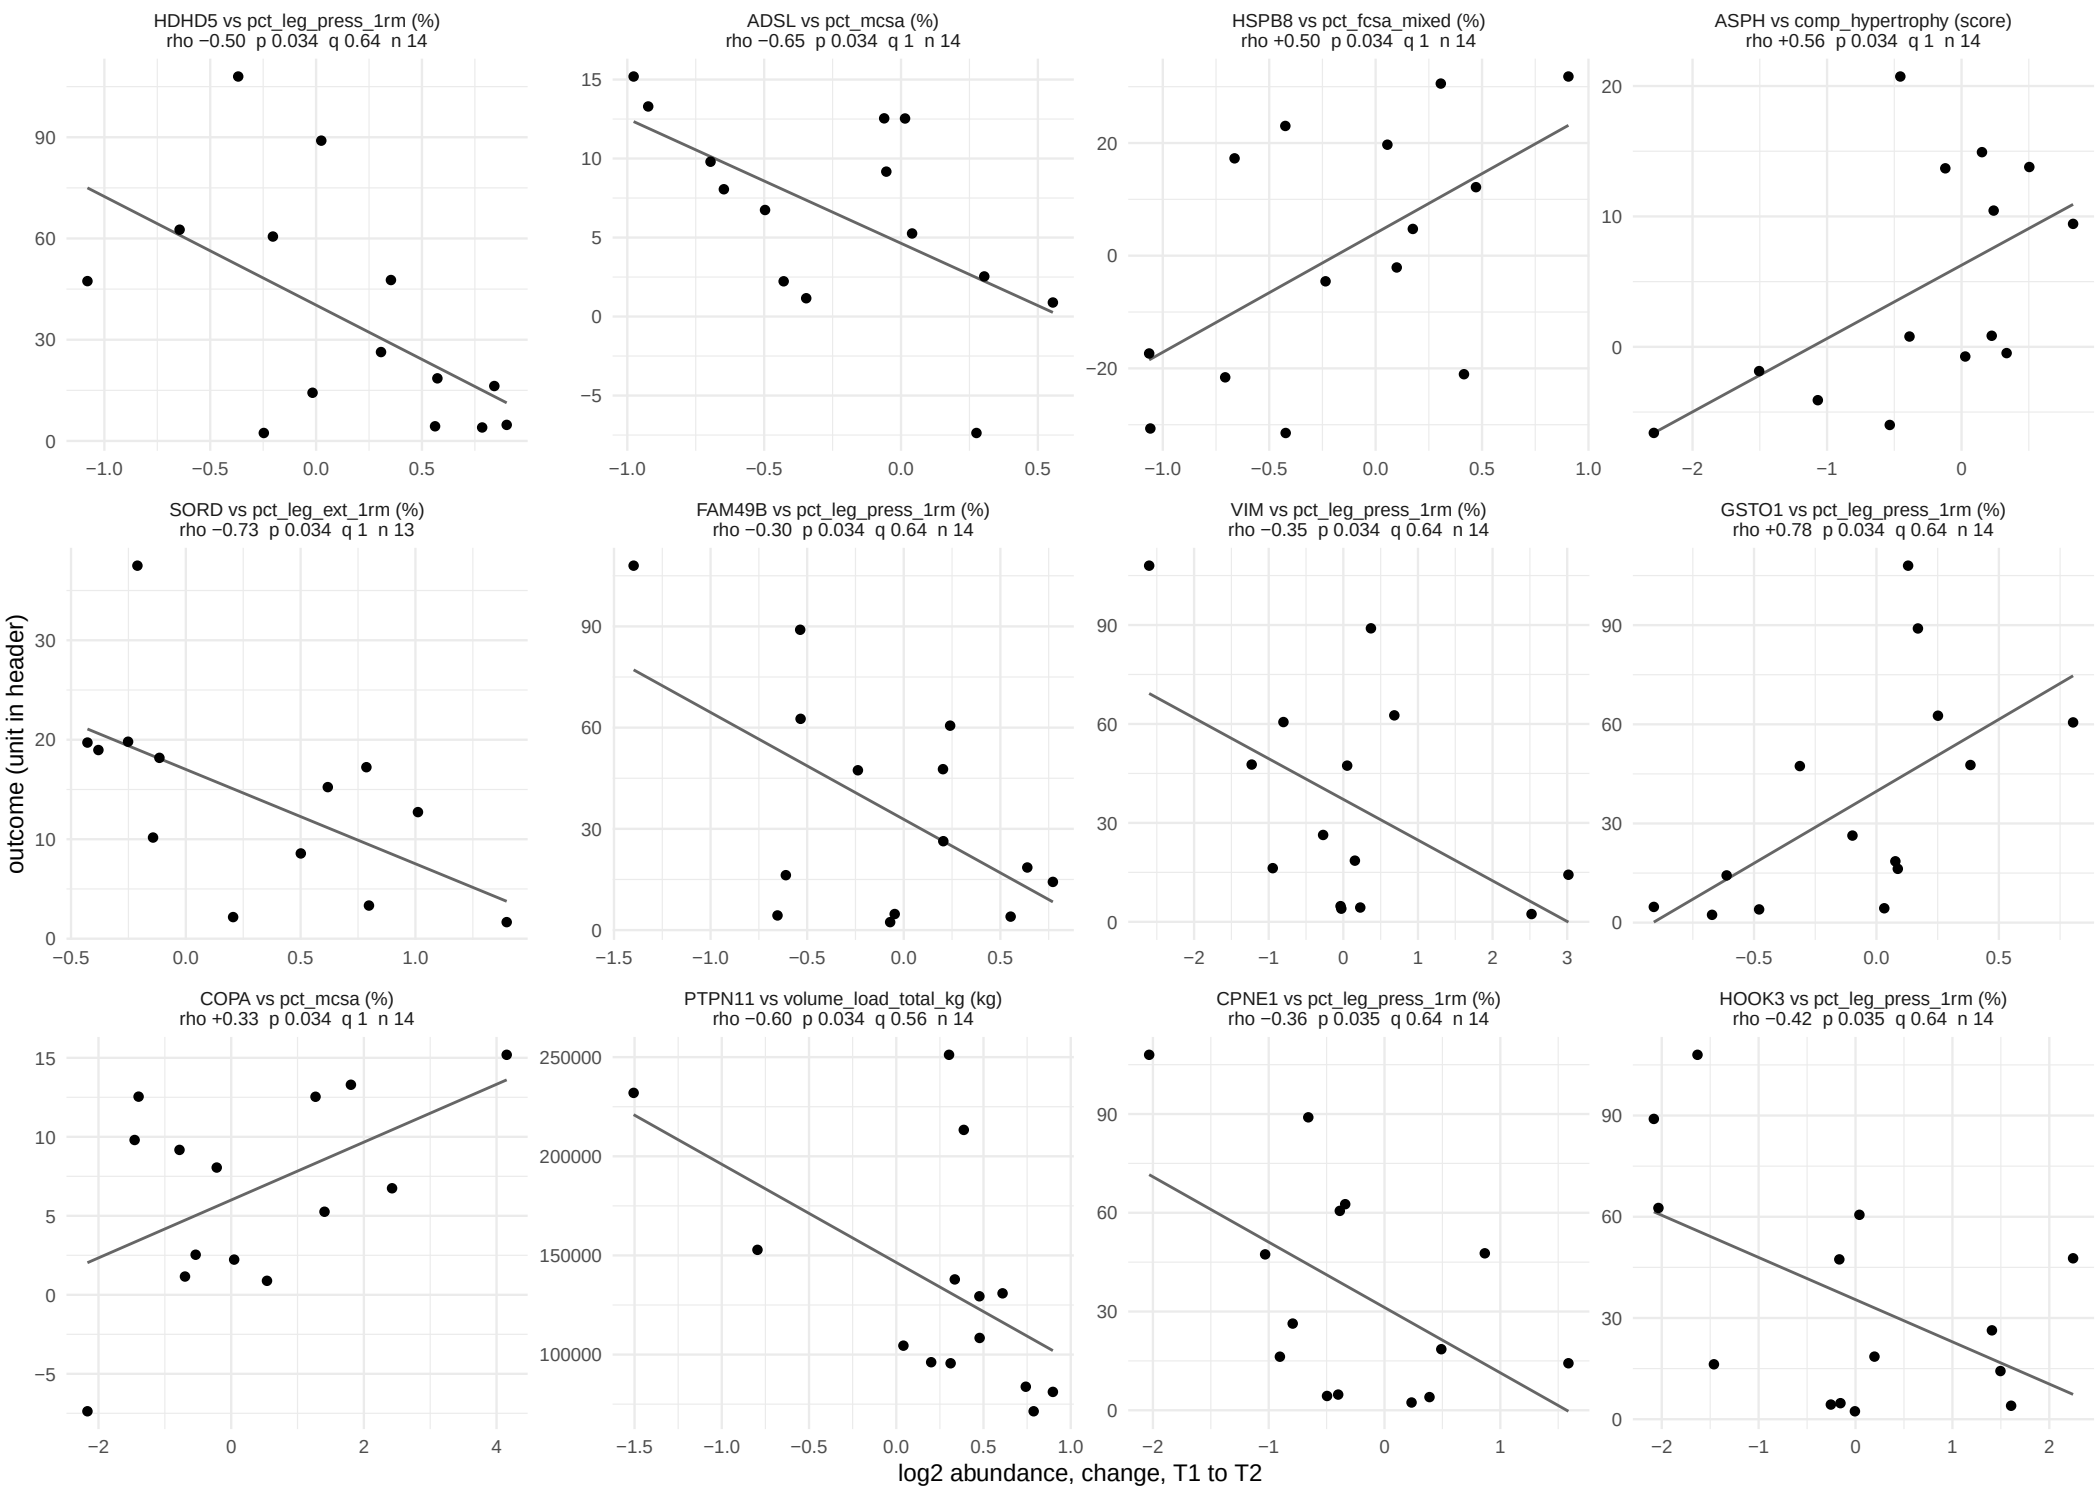

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, training window


605 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 35 of 51.

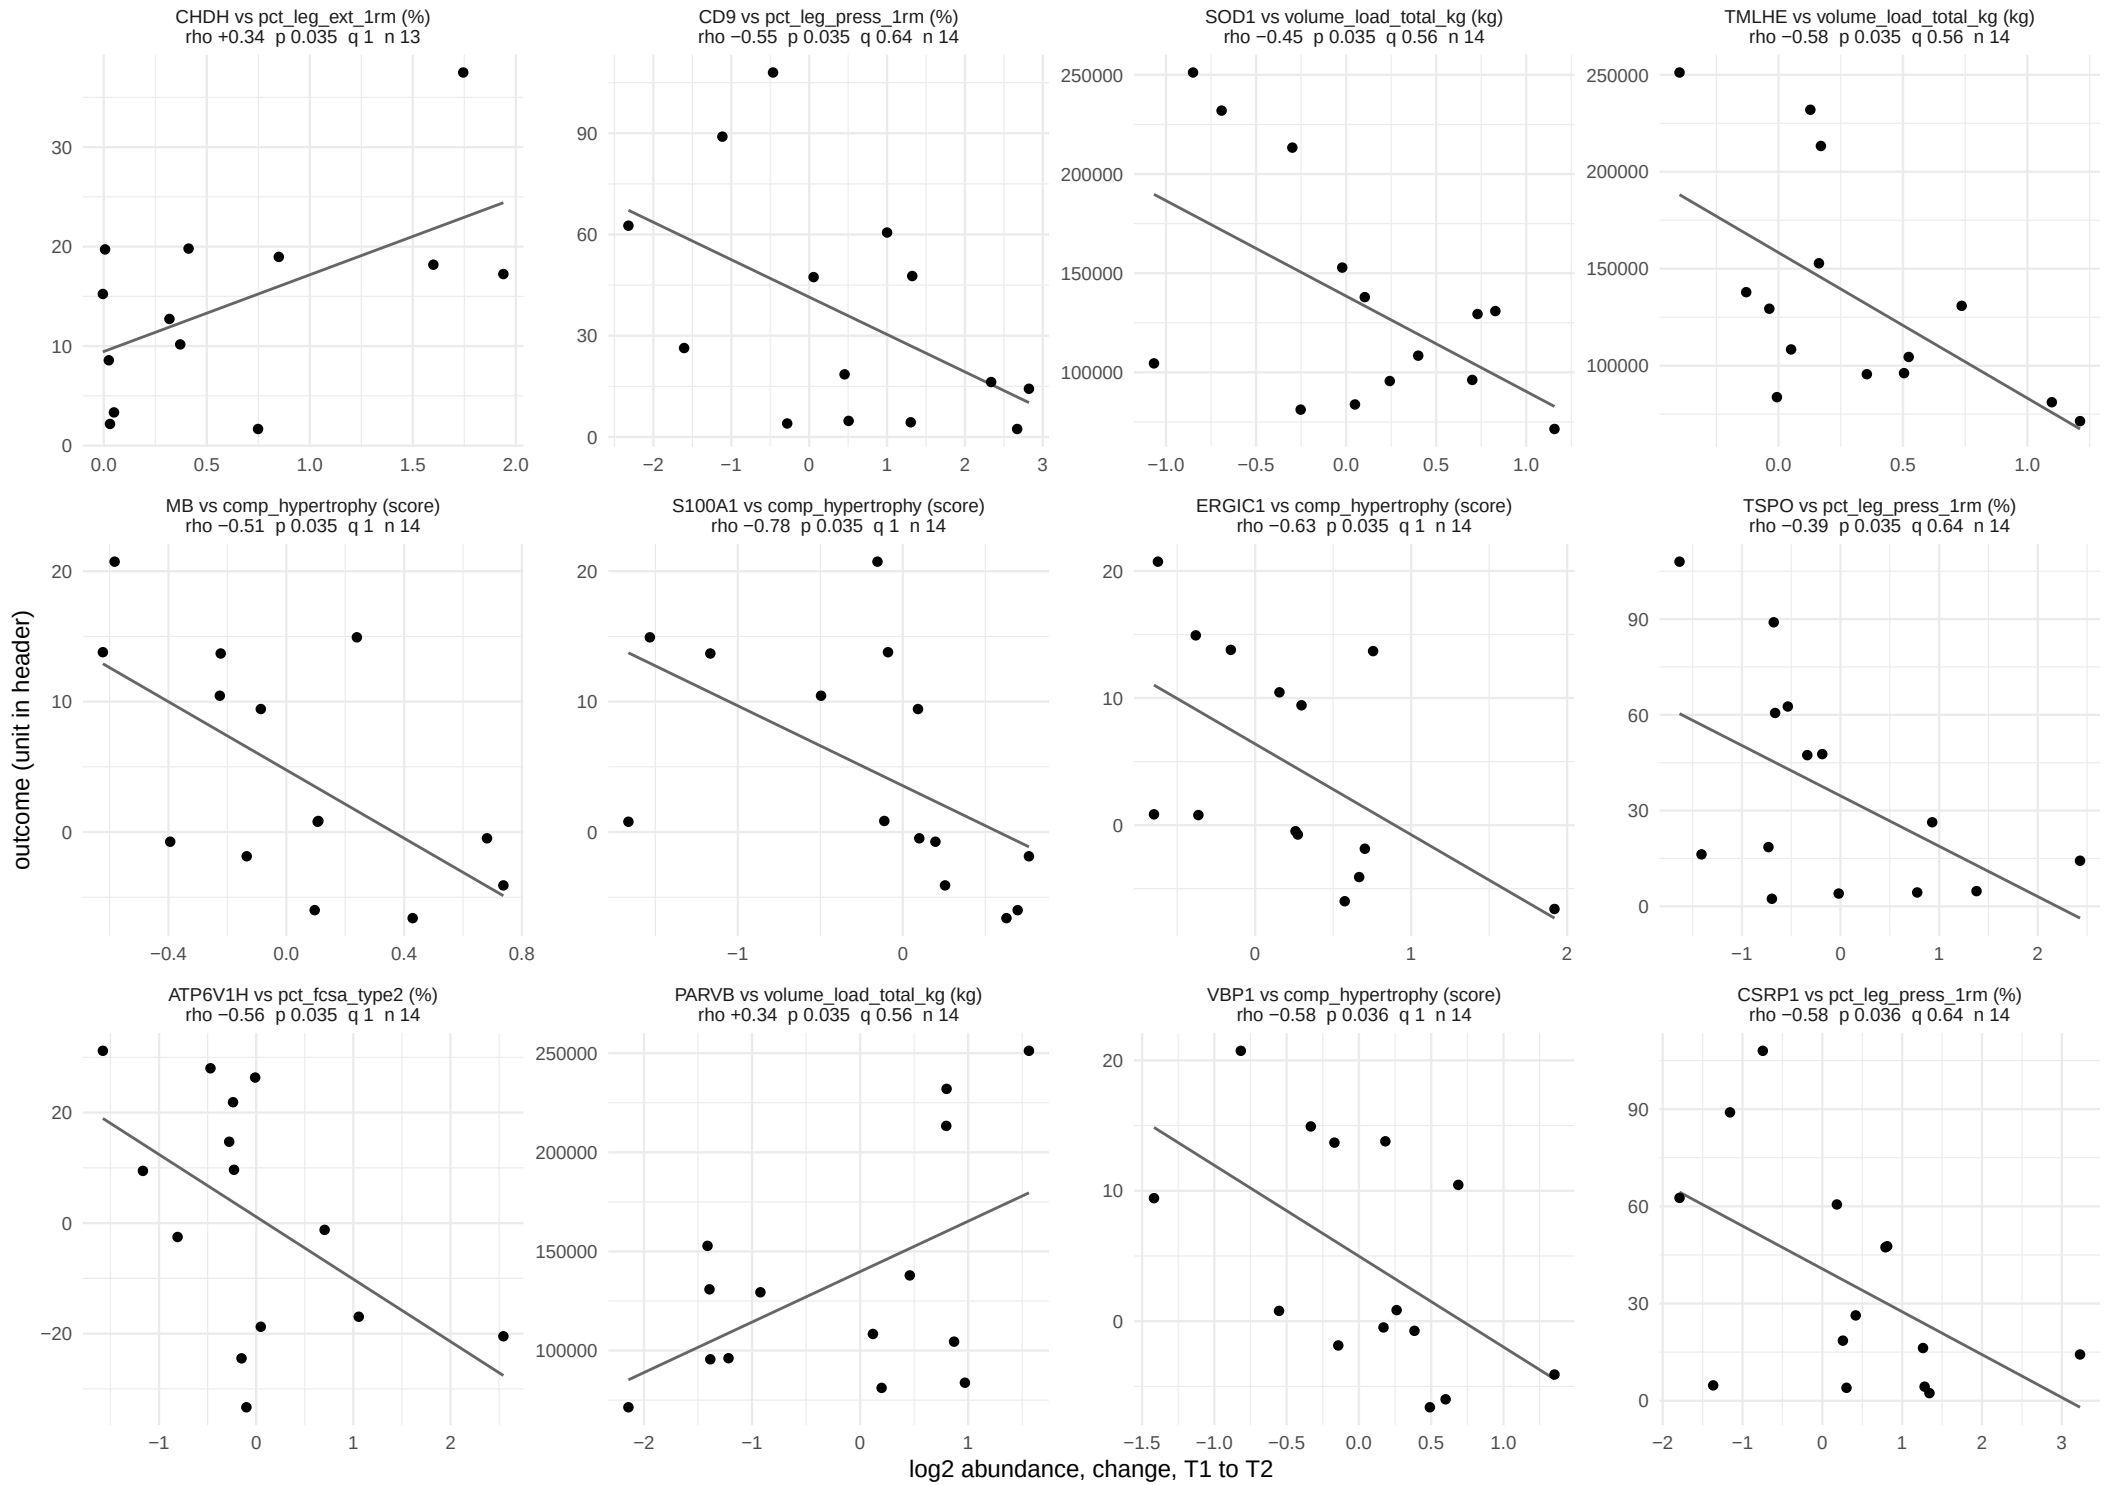

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, training window


605 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 36 of 51.

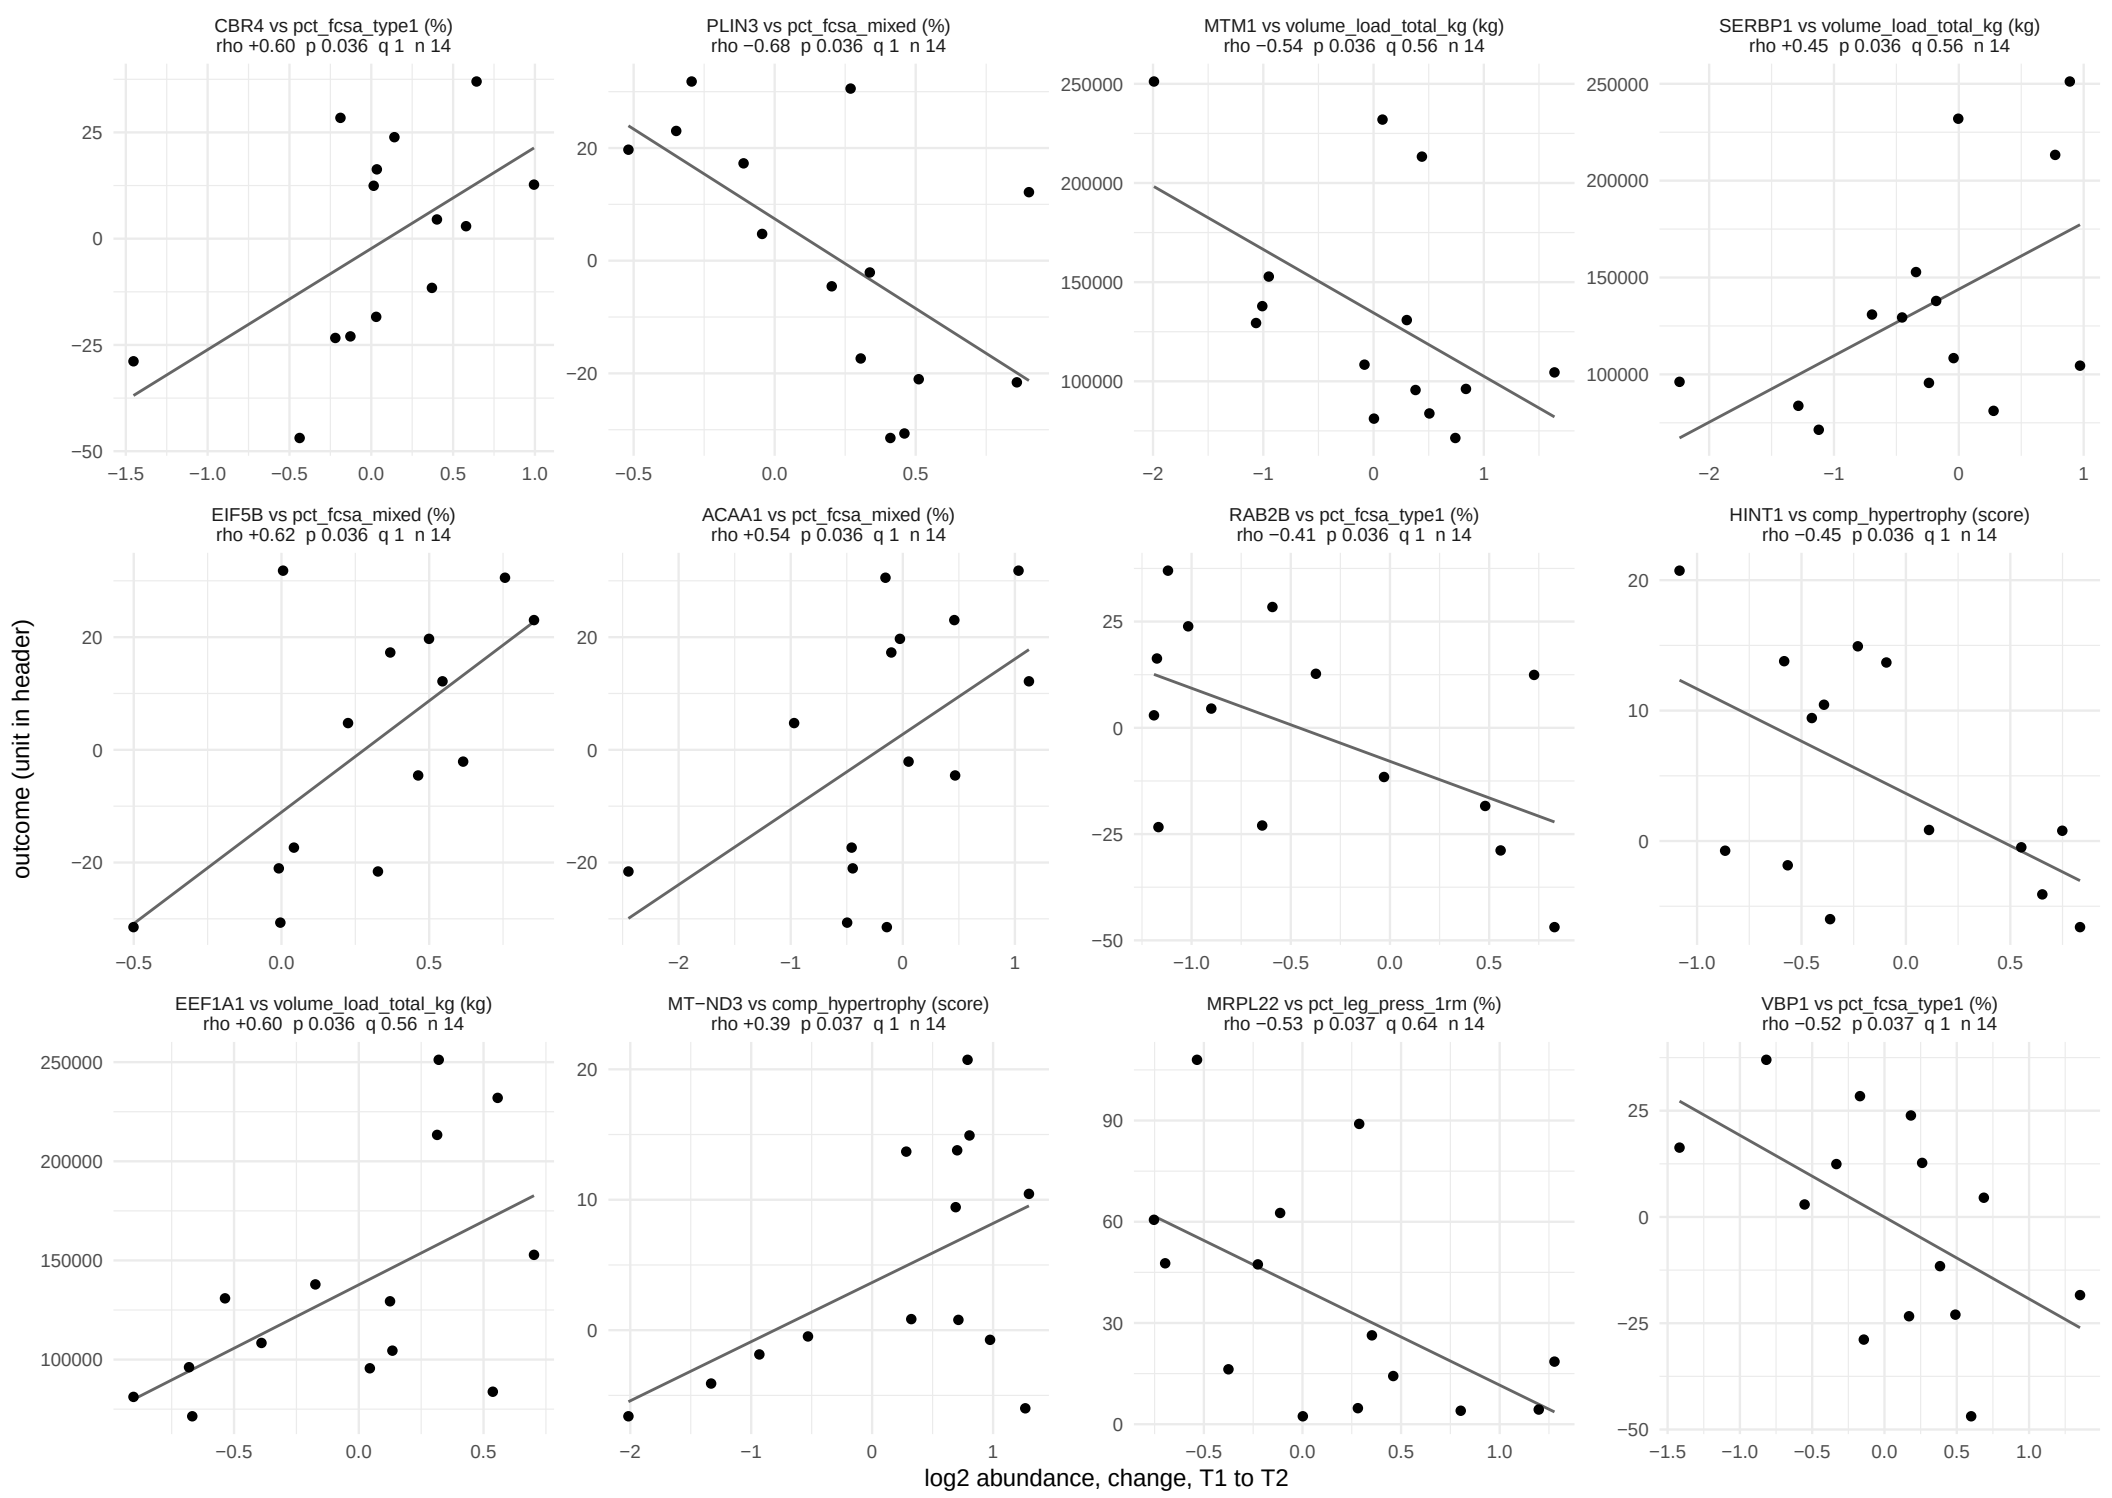

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, training window


605 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 37 of 51.

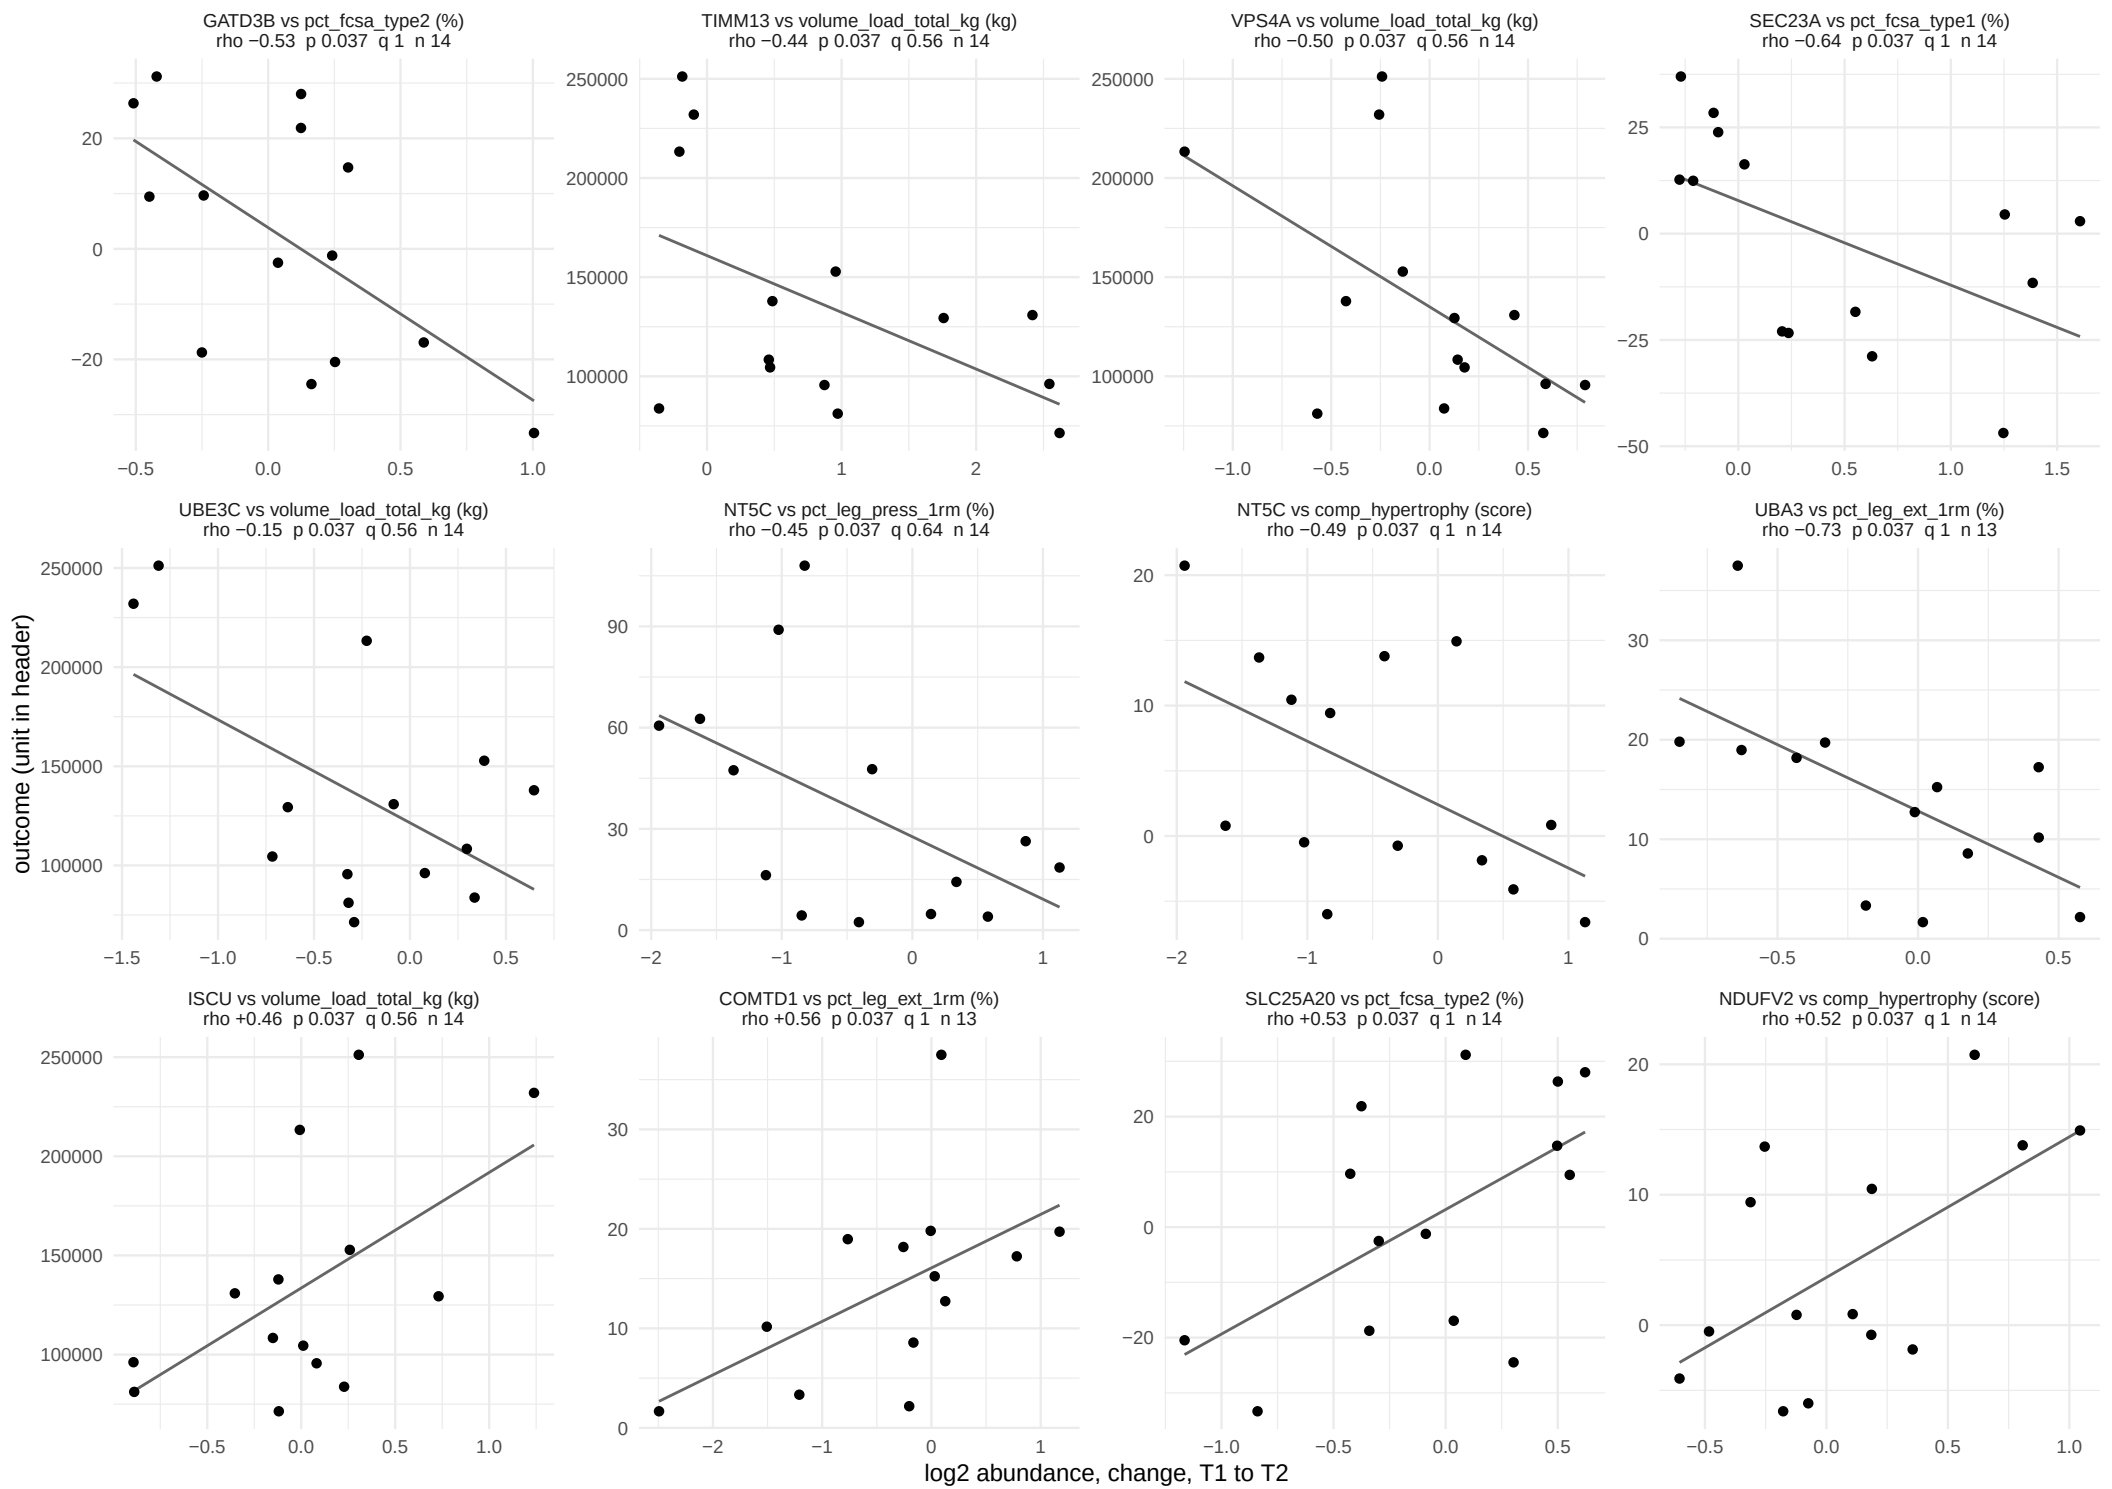

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, training window


605 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 38 of 51.

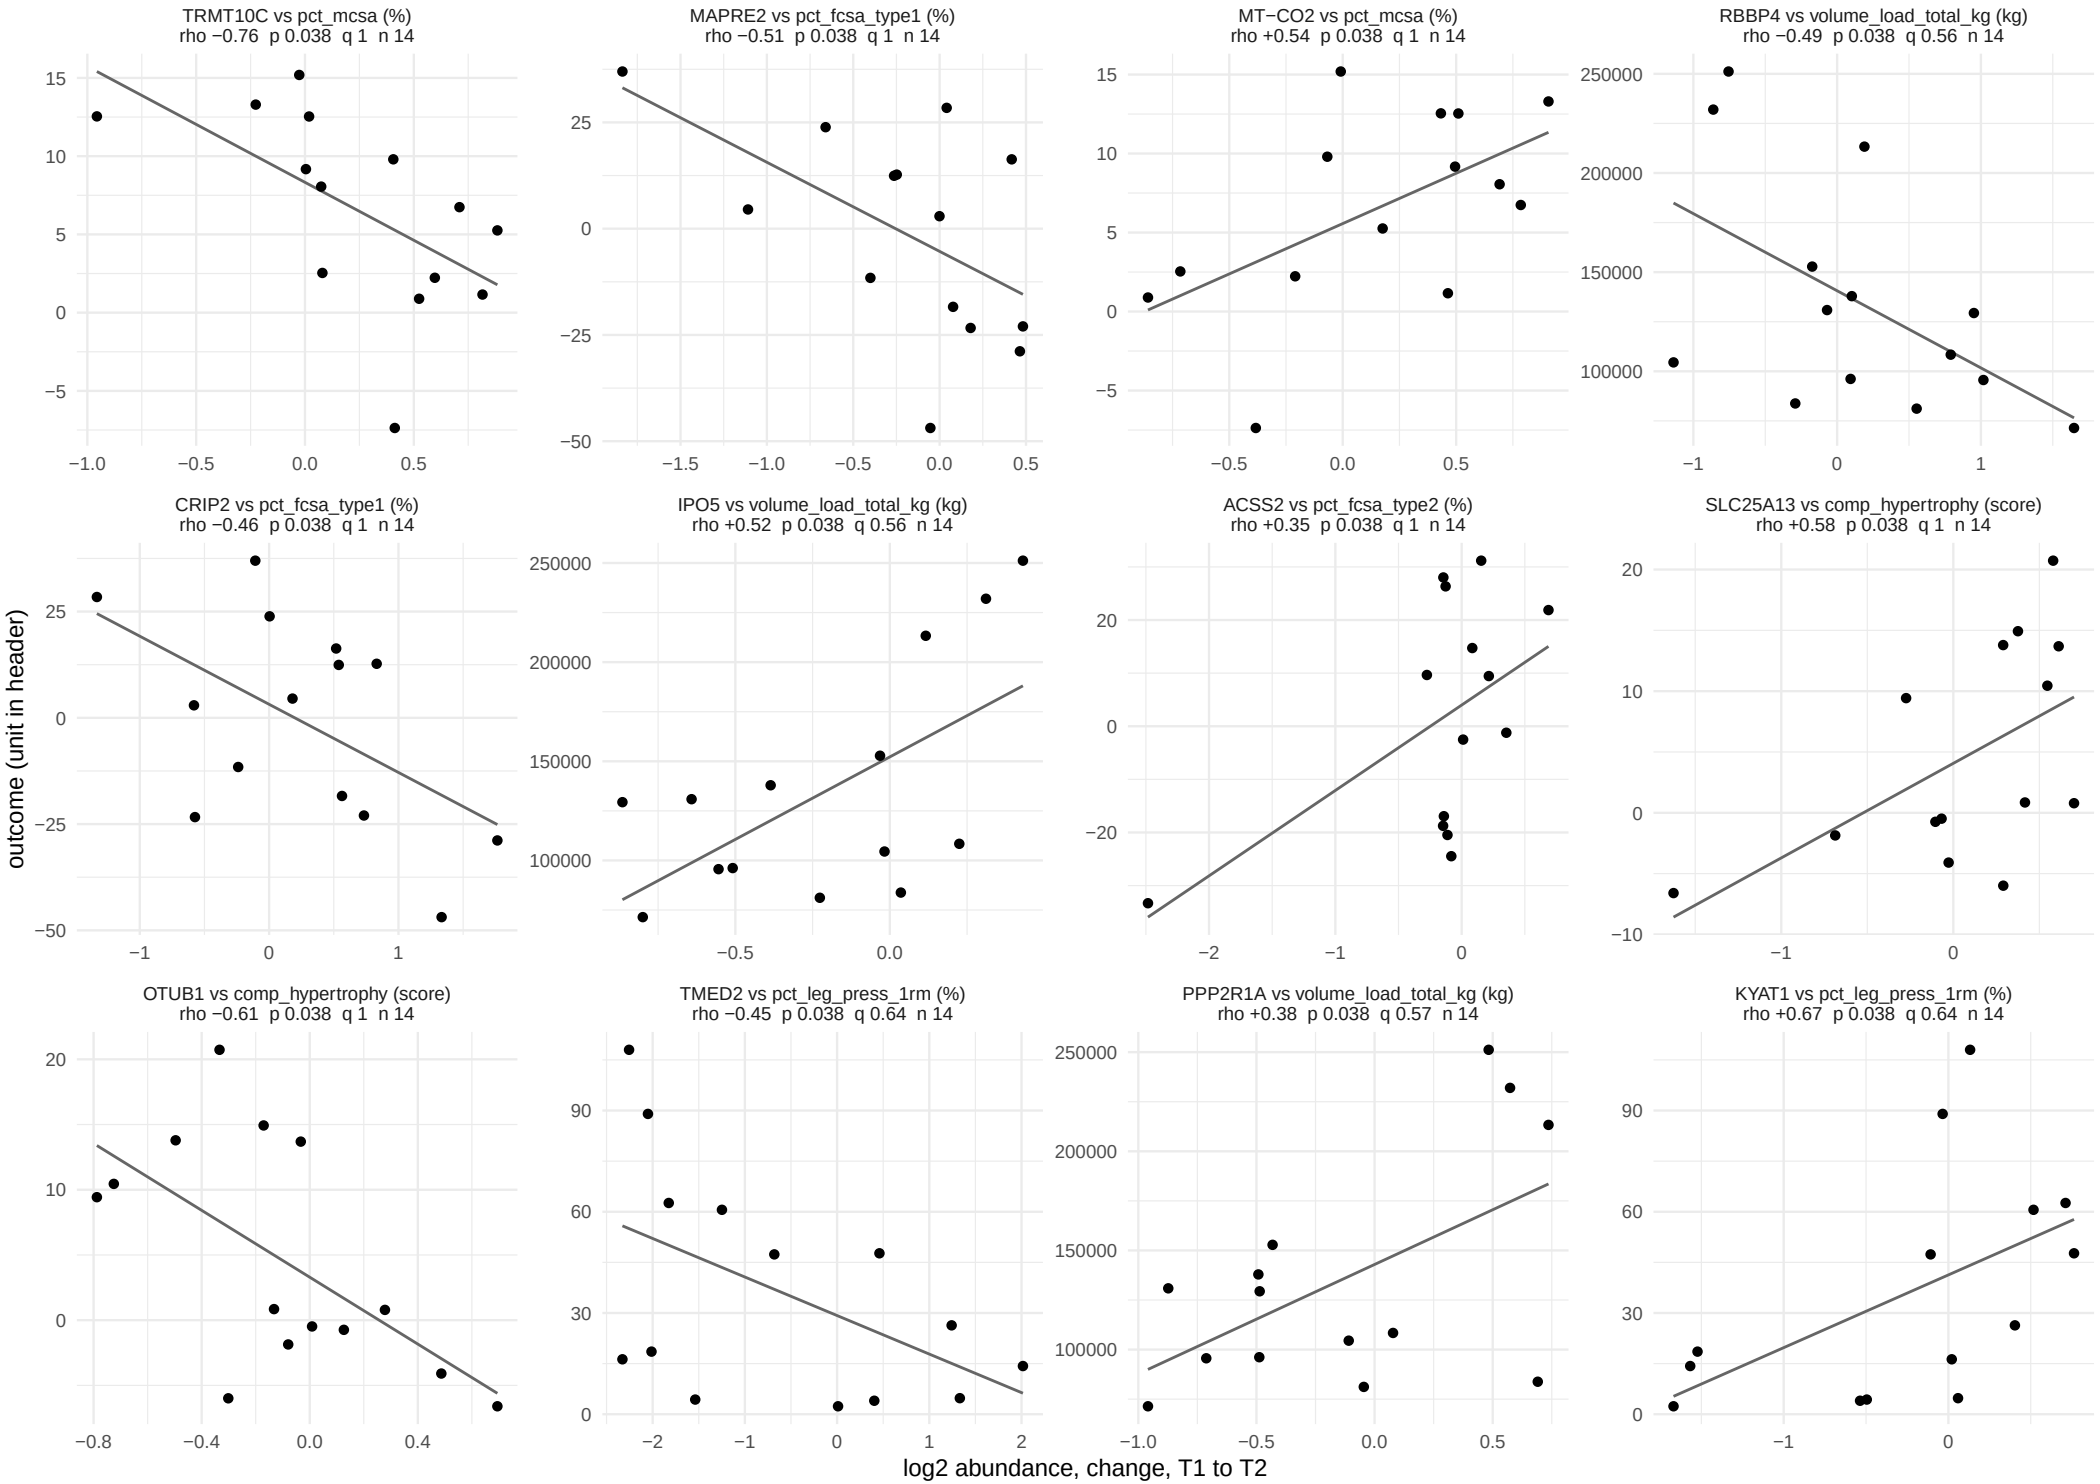

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, training window


605 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 39 of 51.

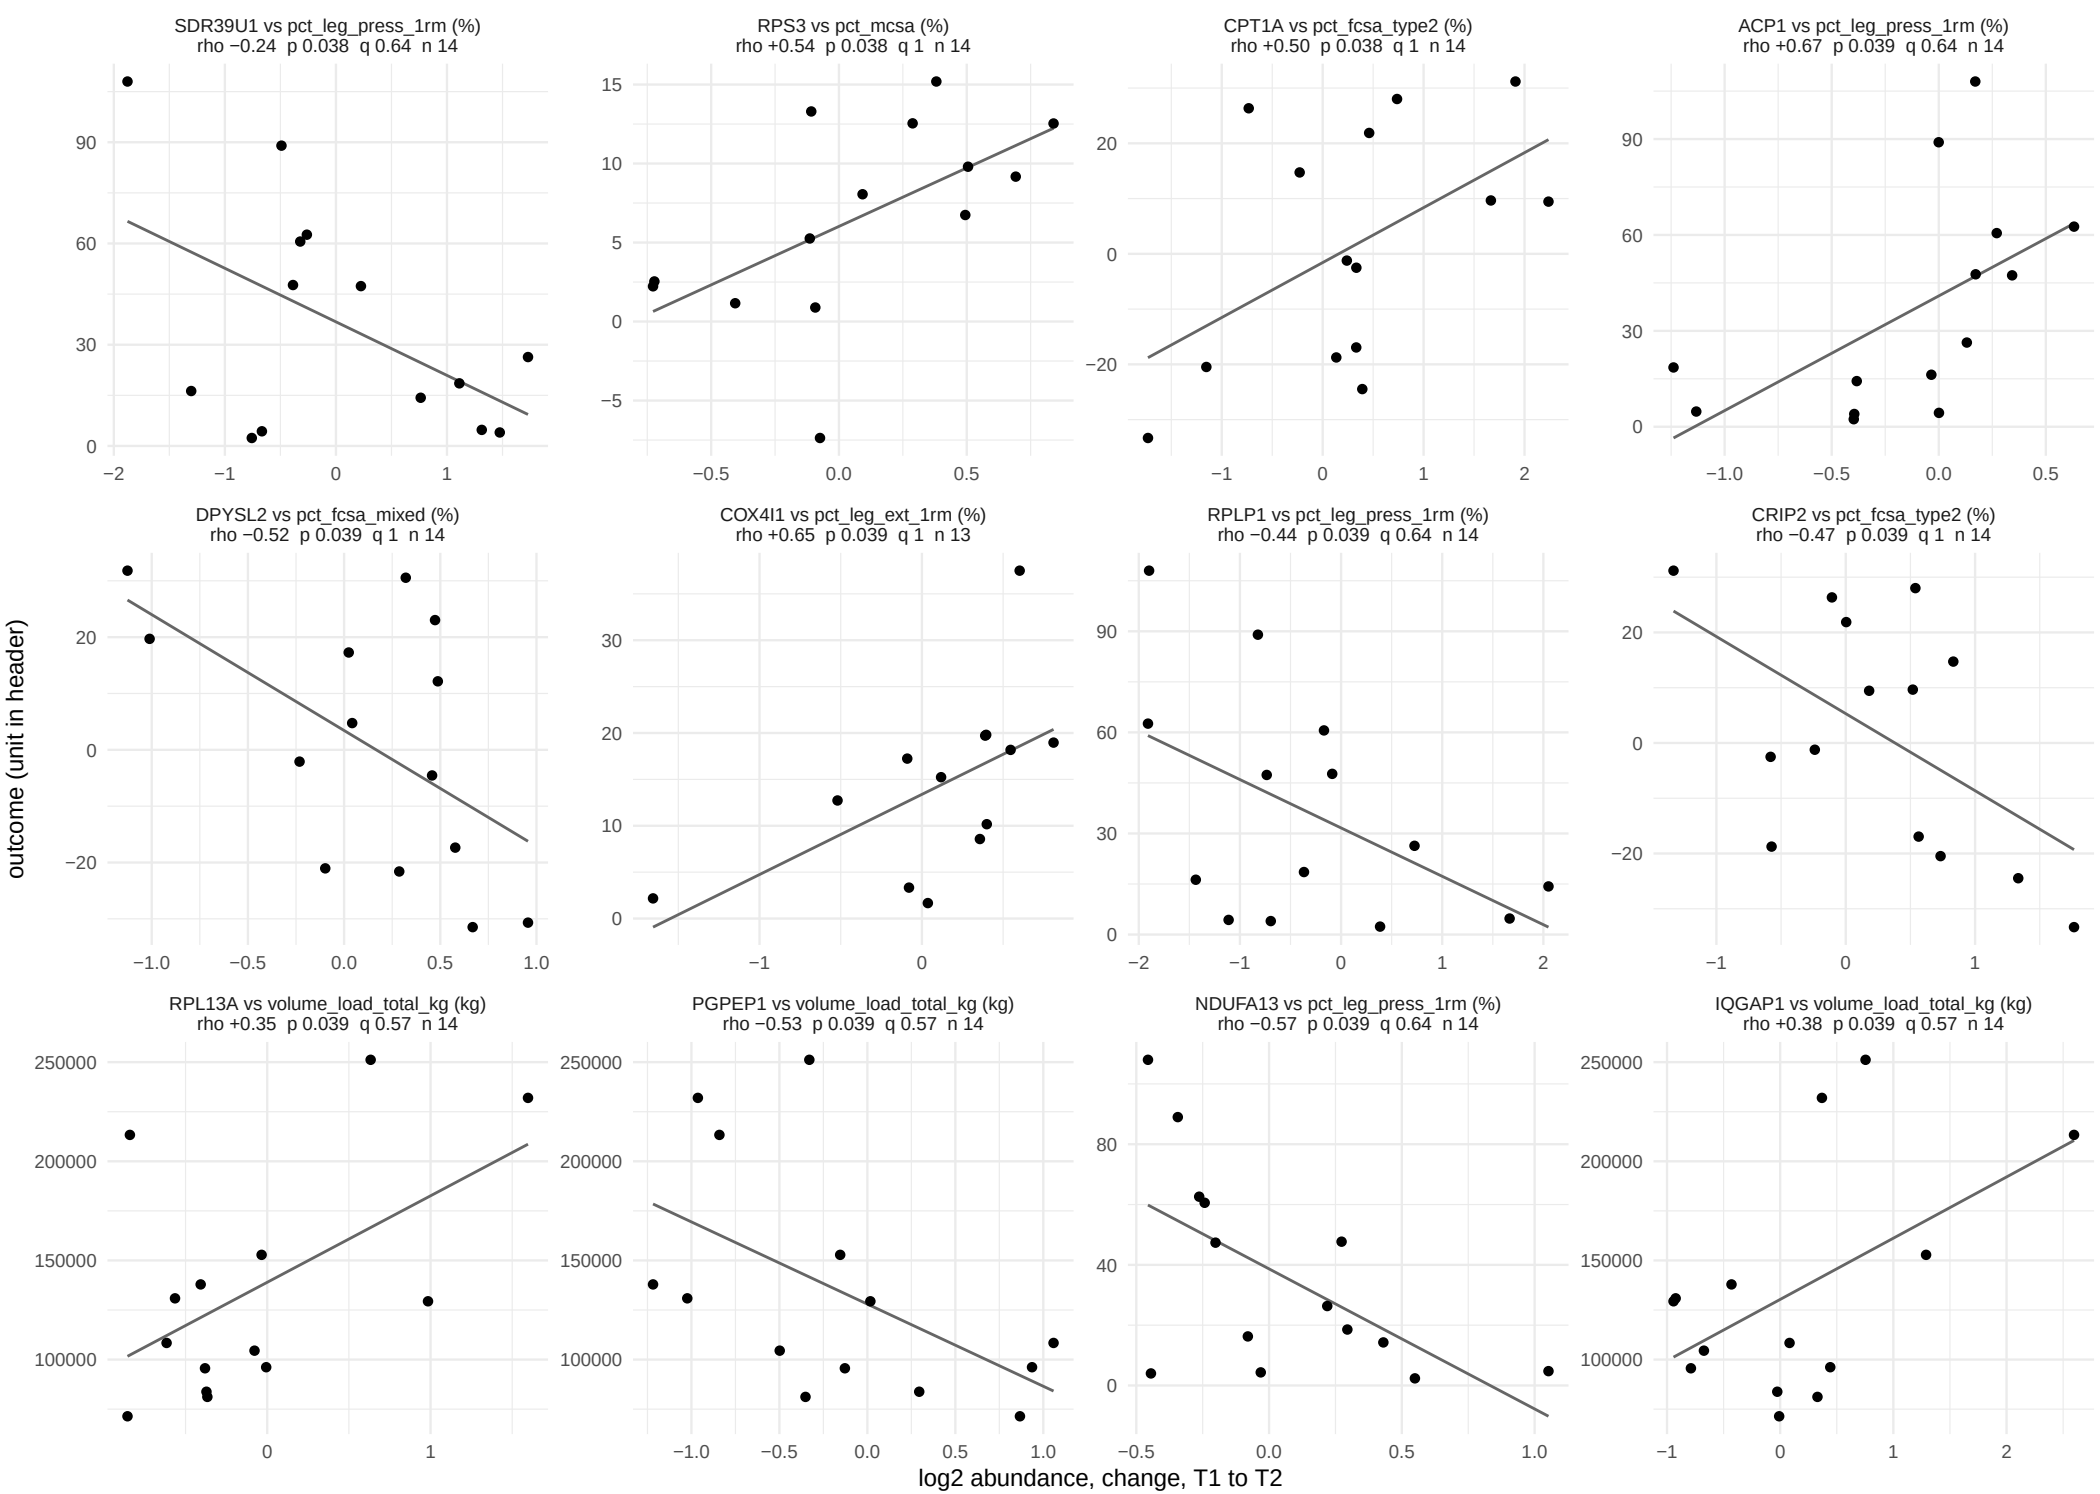

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, training window


605 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 40 of 51.

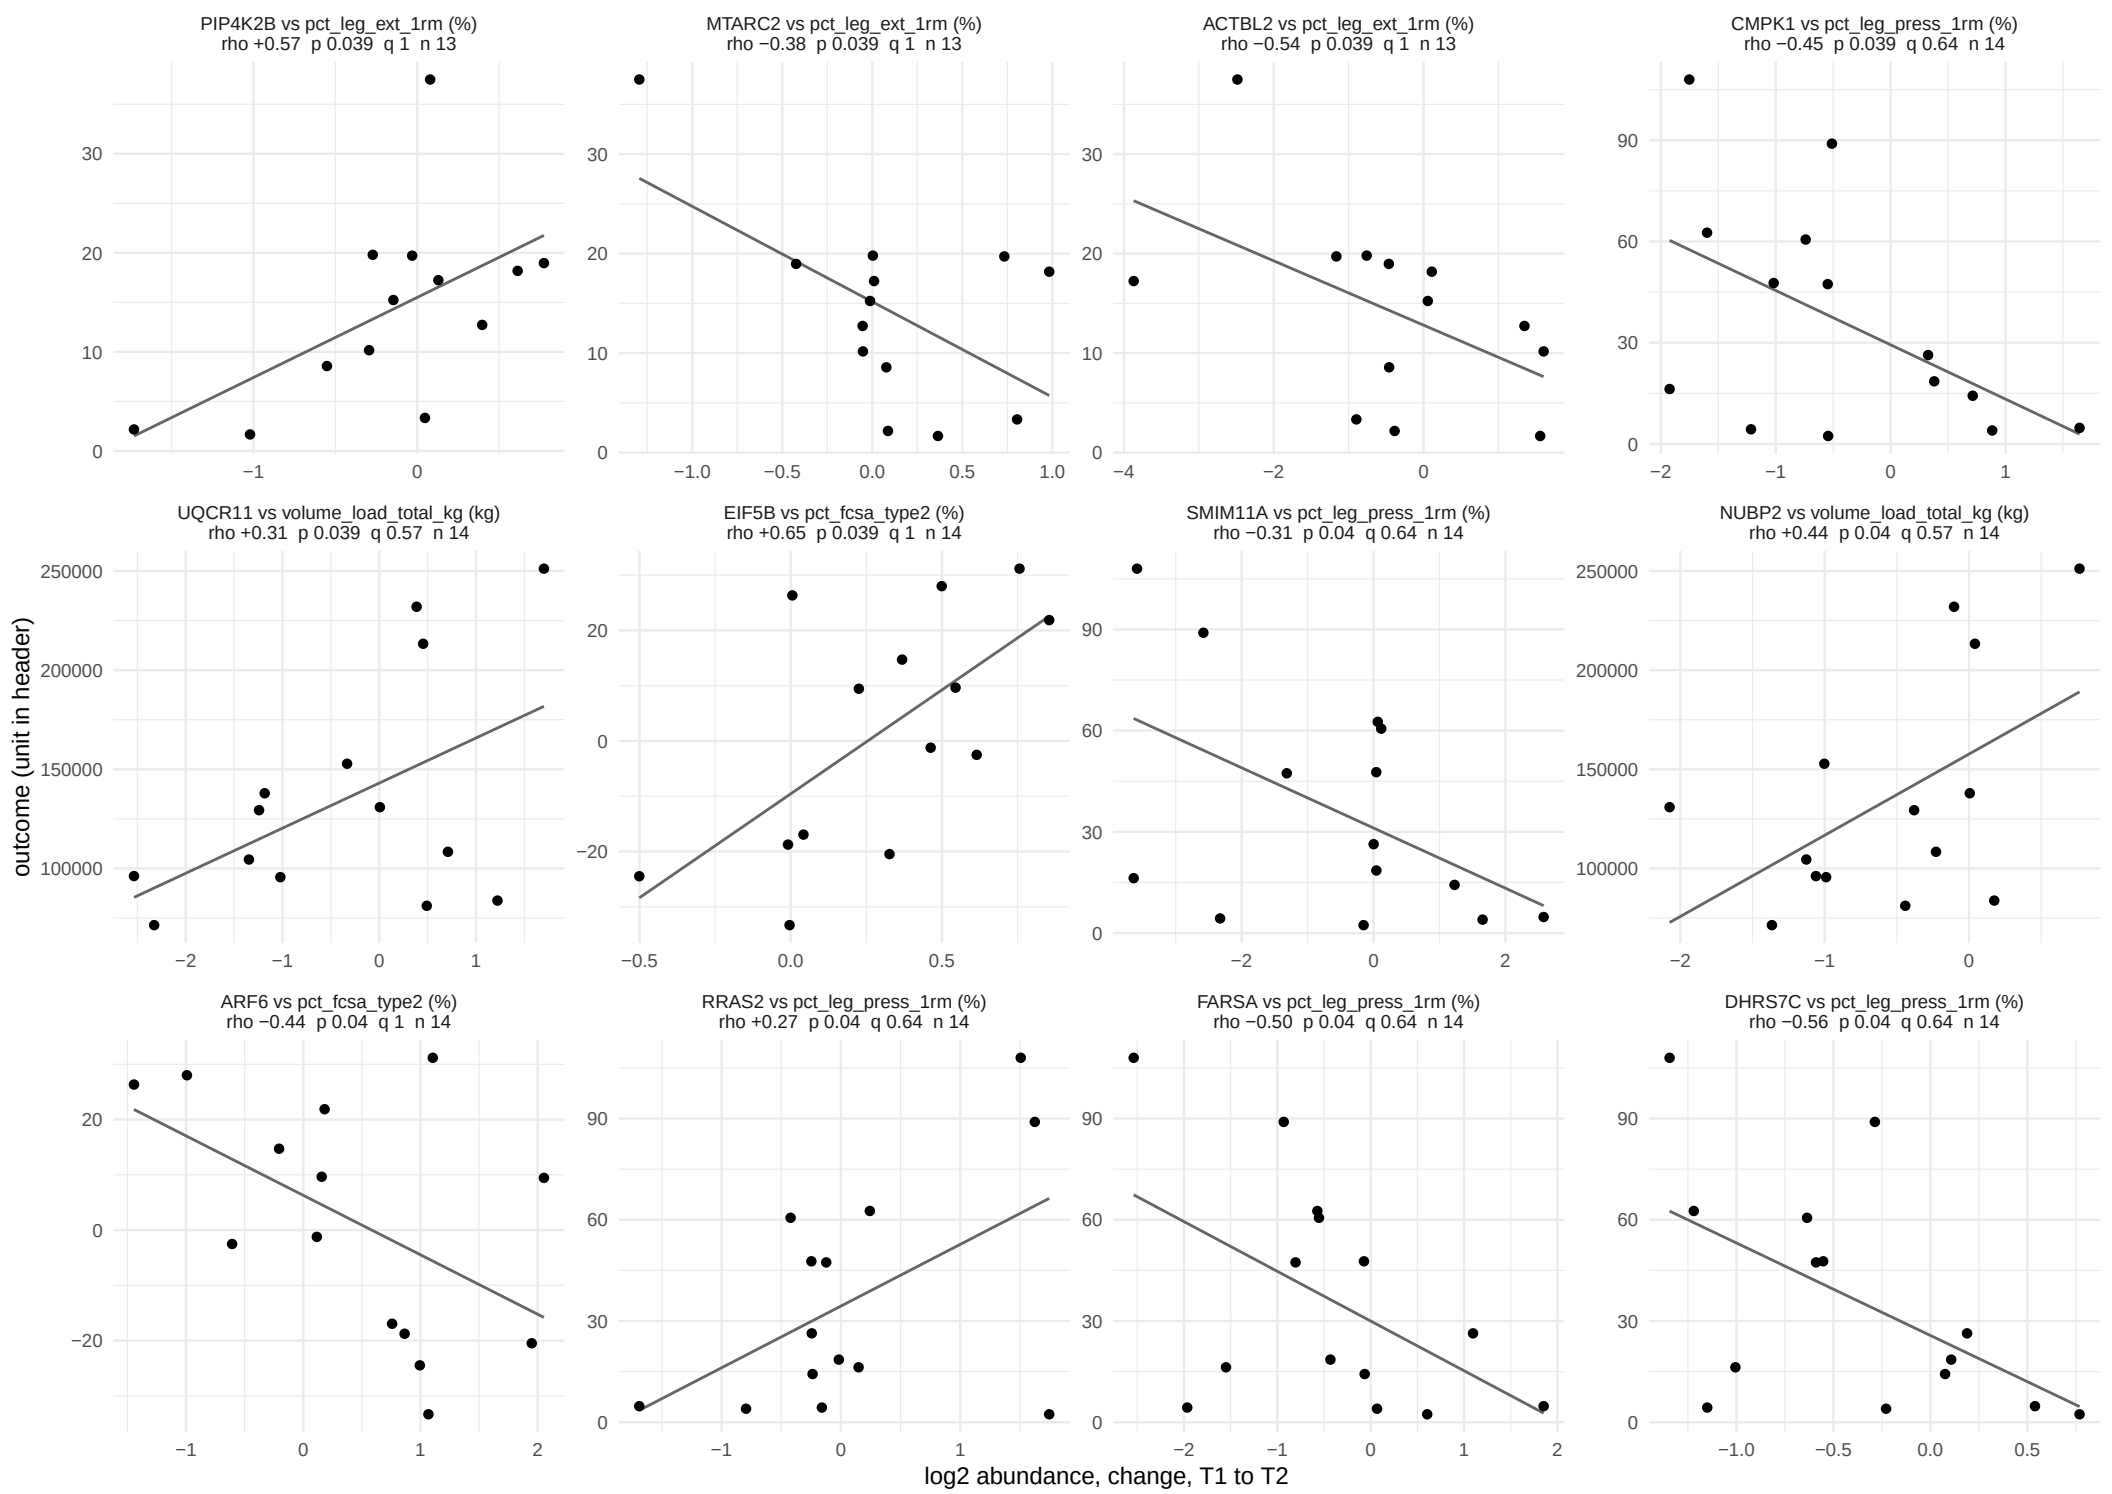

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, training window


605 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 41 of 51.

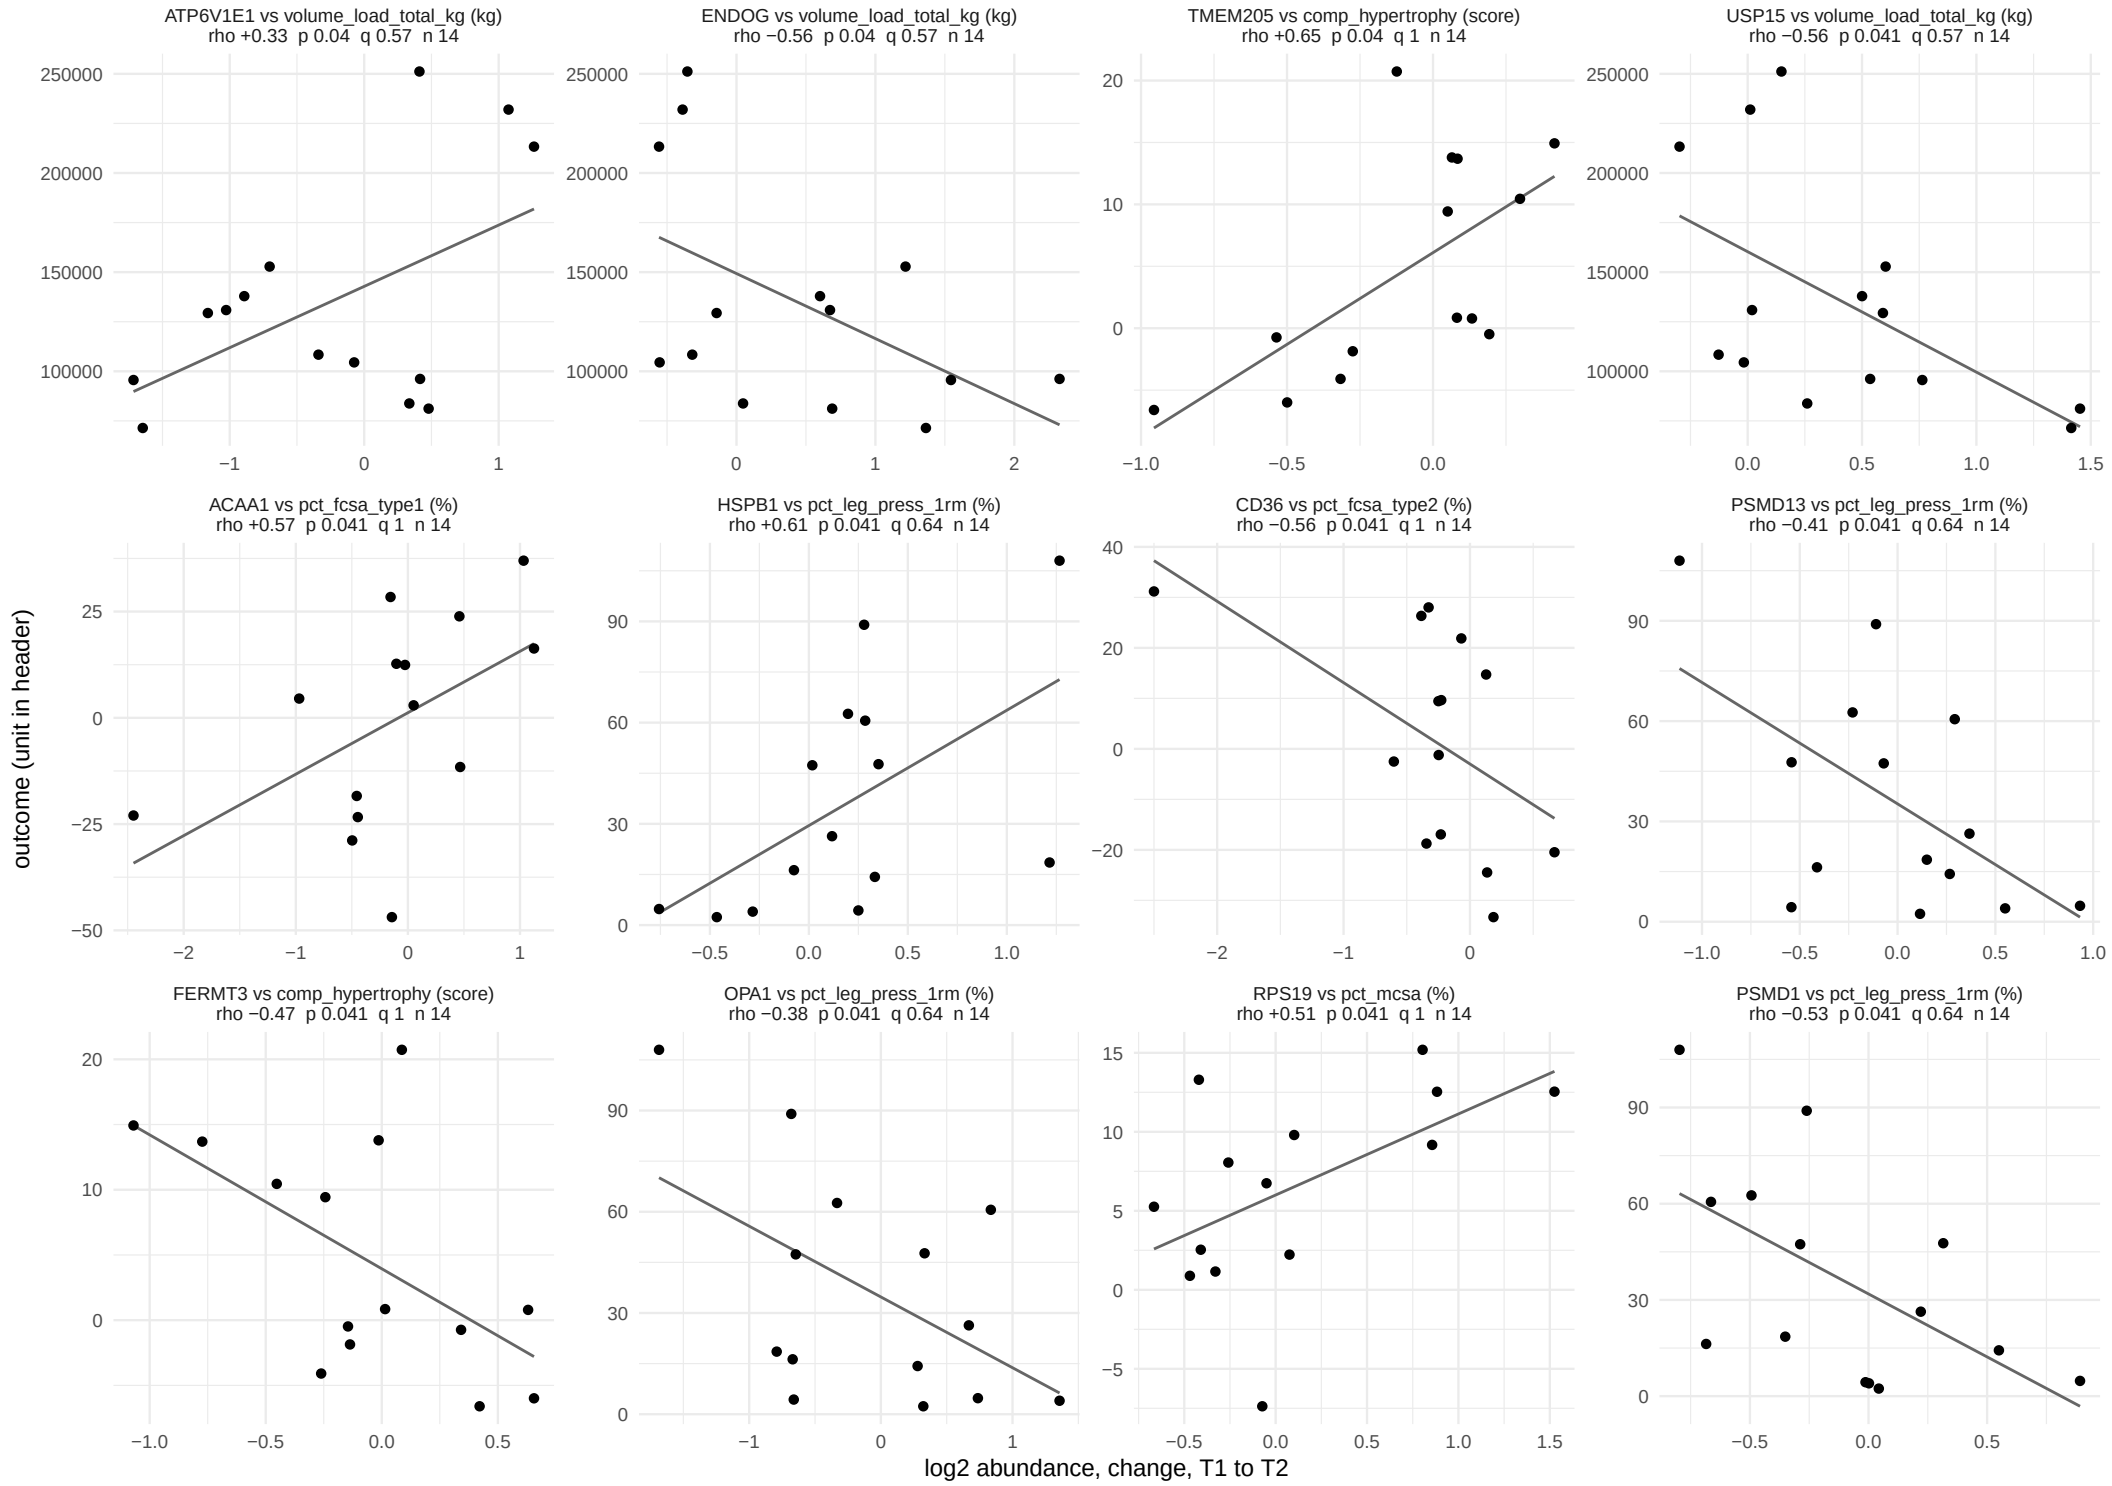

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, training window


605 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 42 of 51.

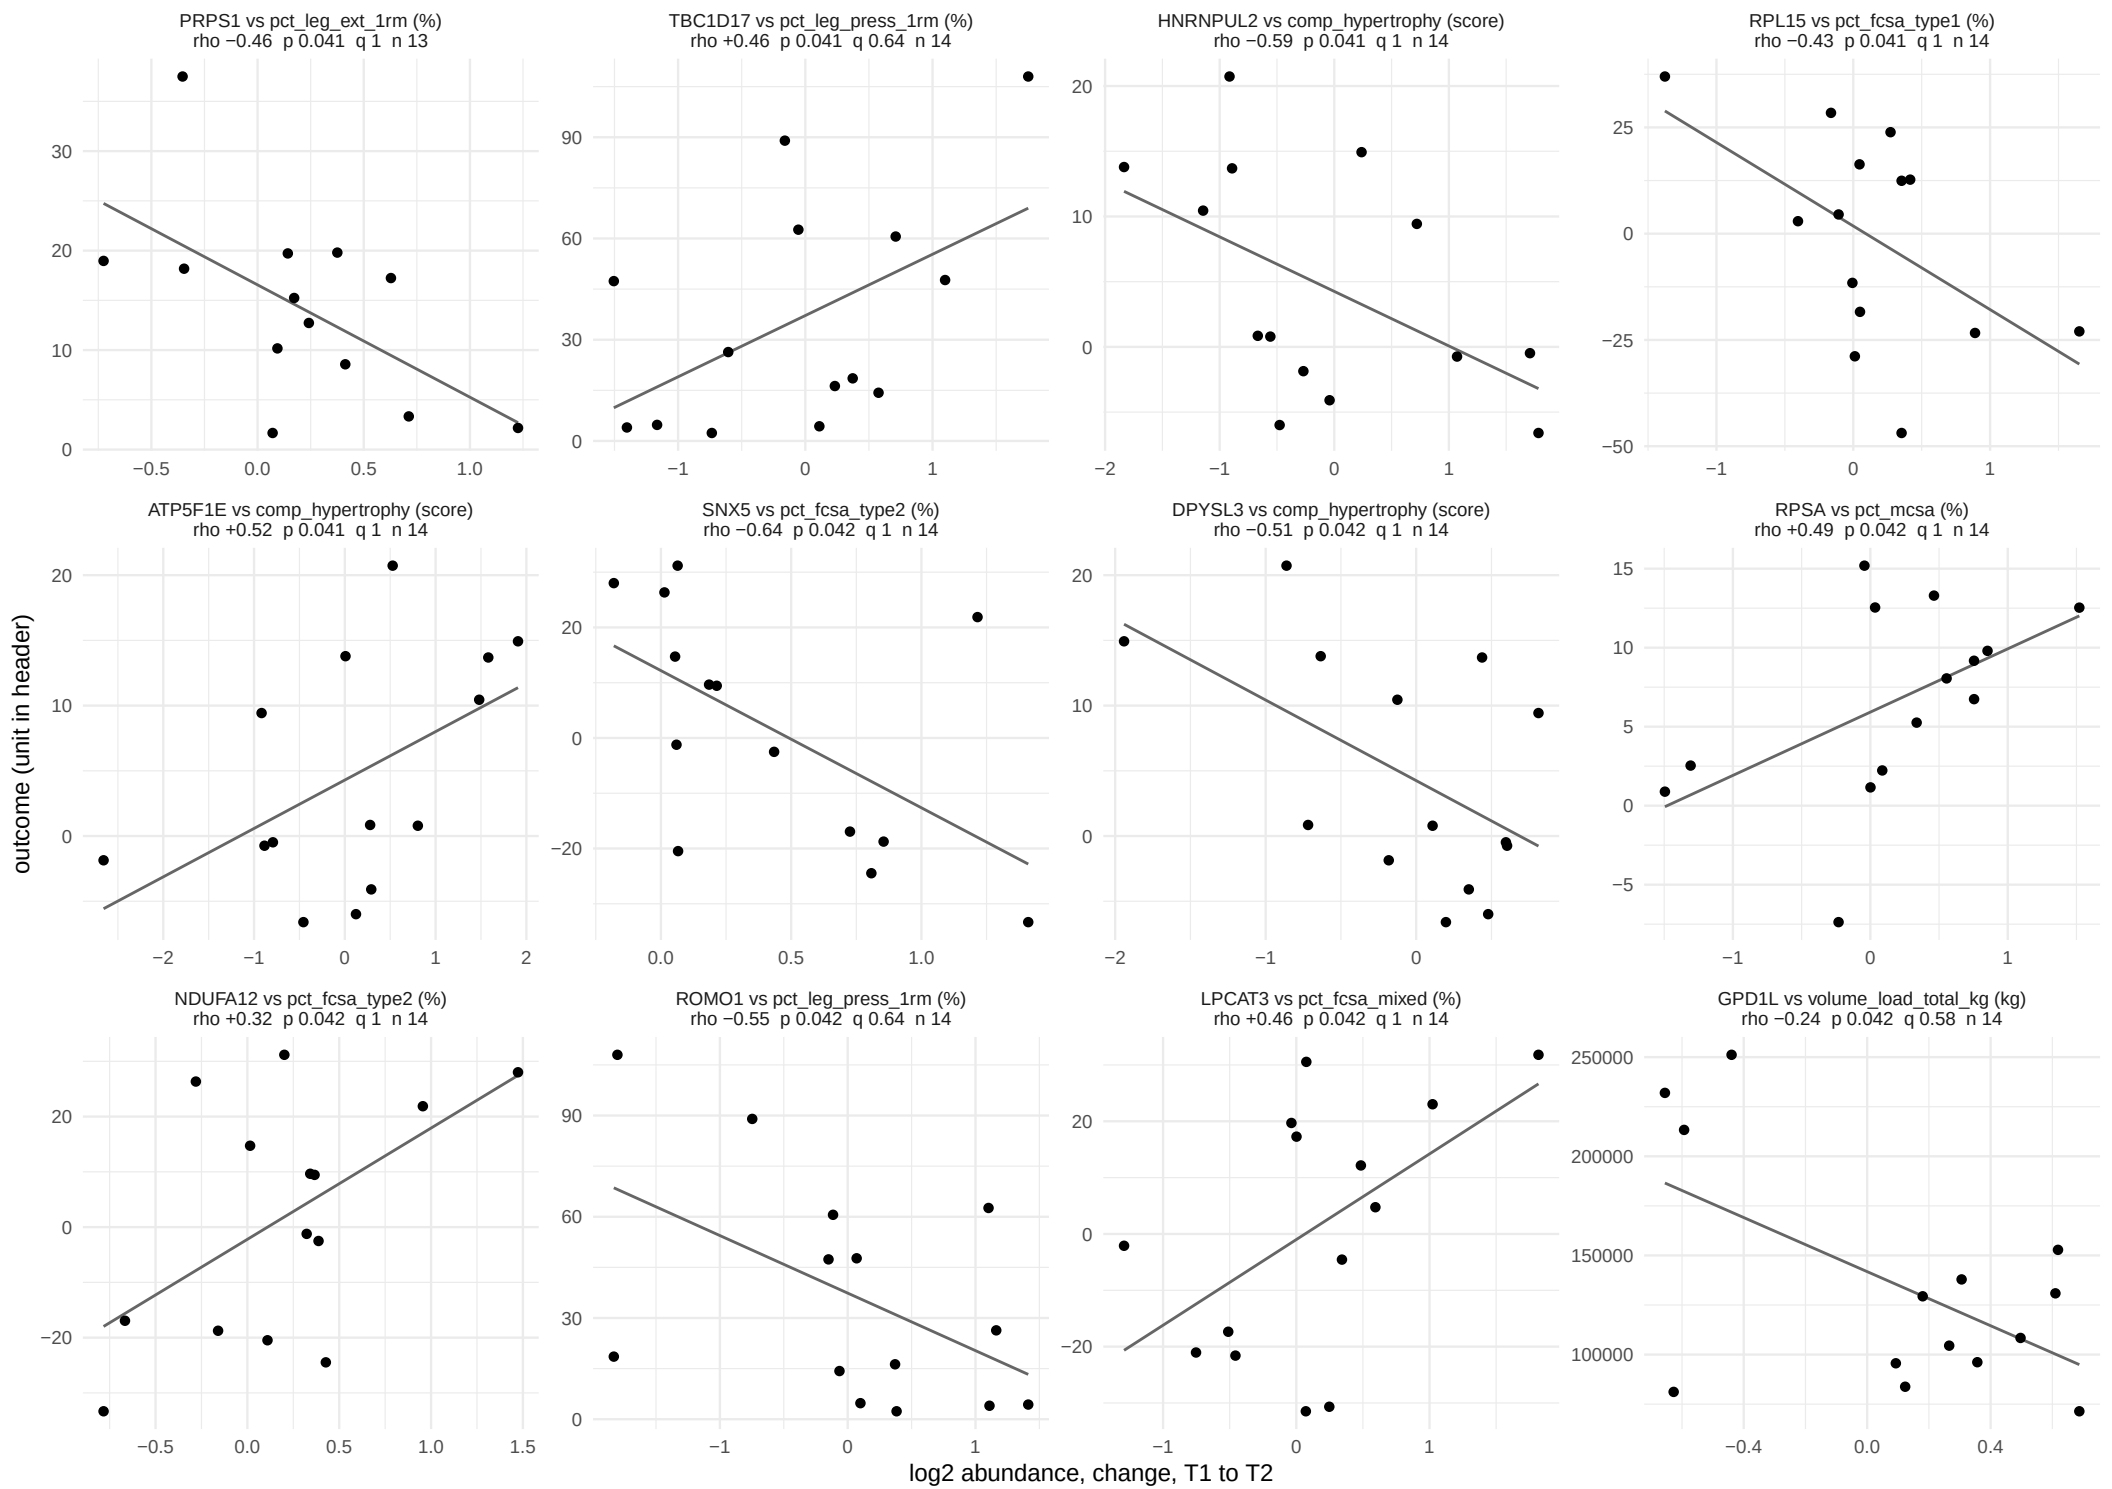

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, training window


605 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 43 of 51.

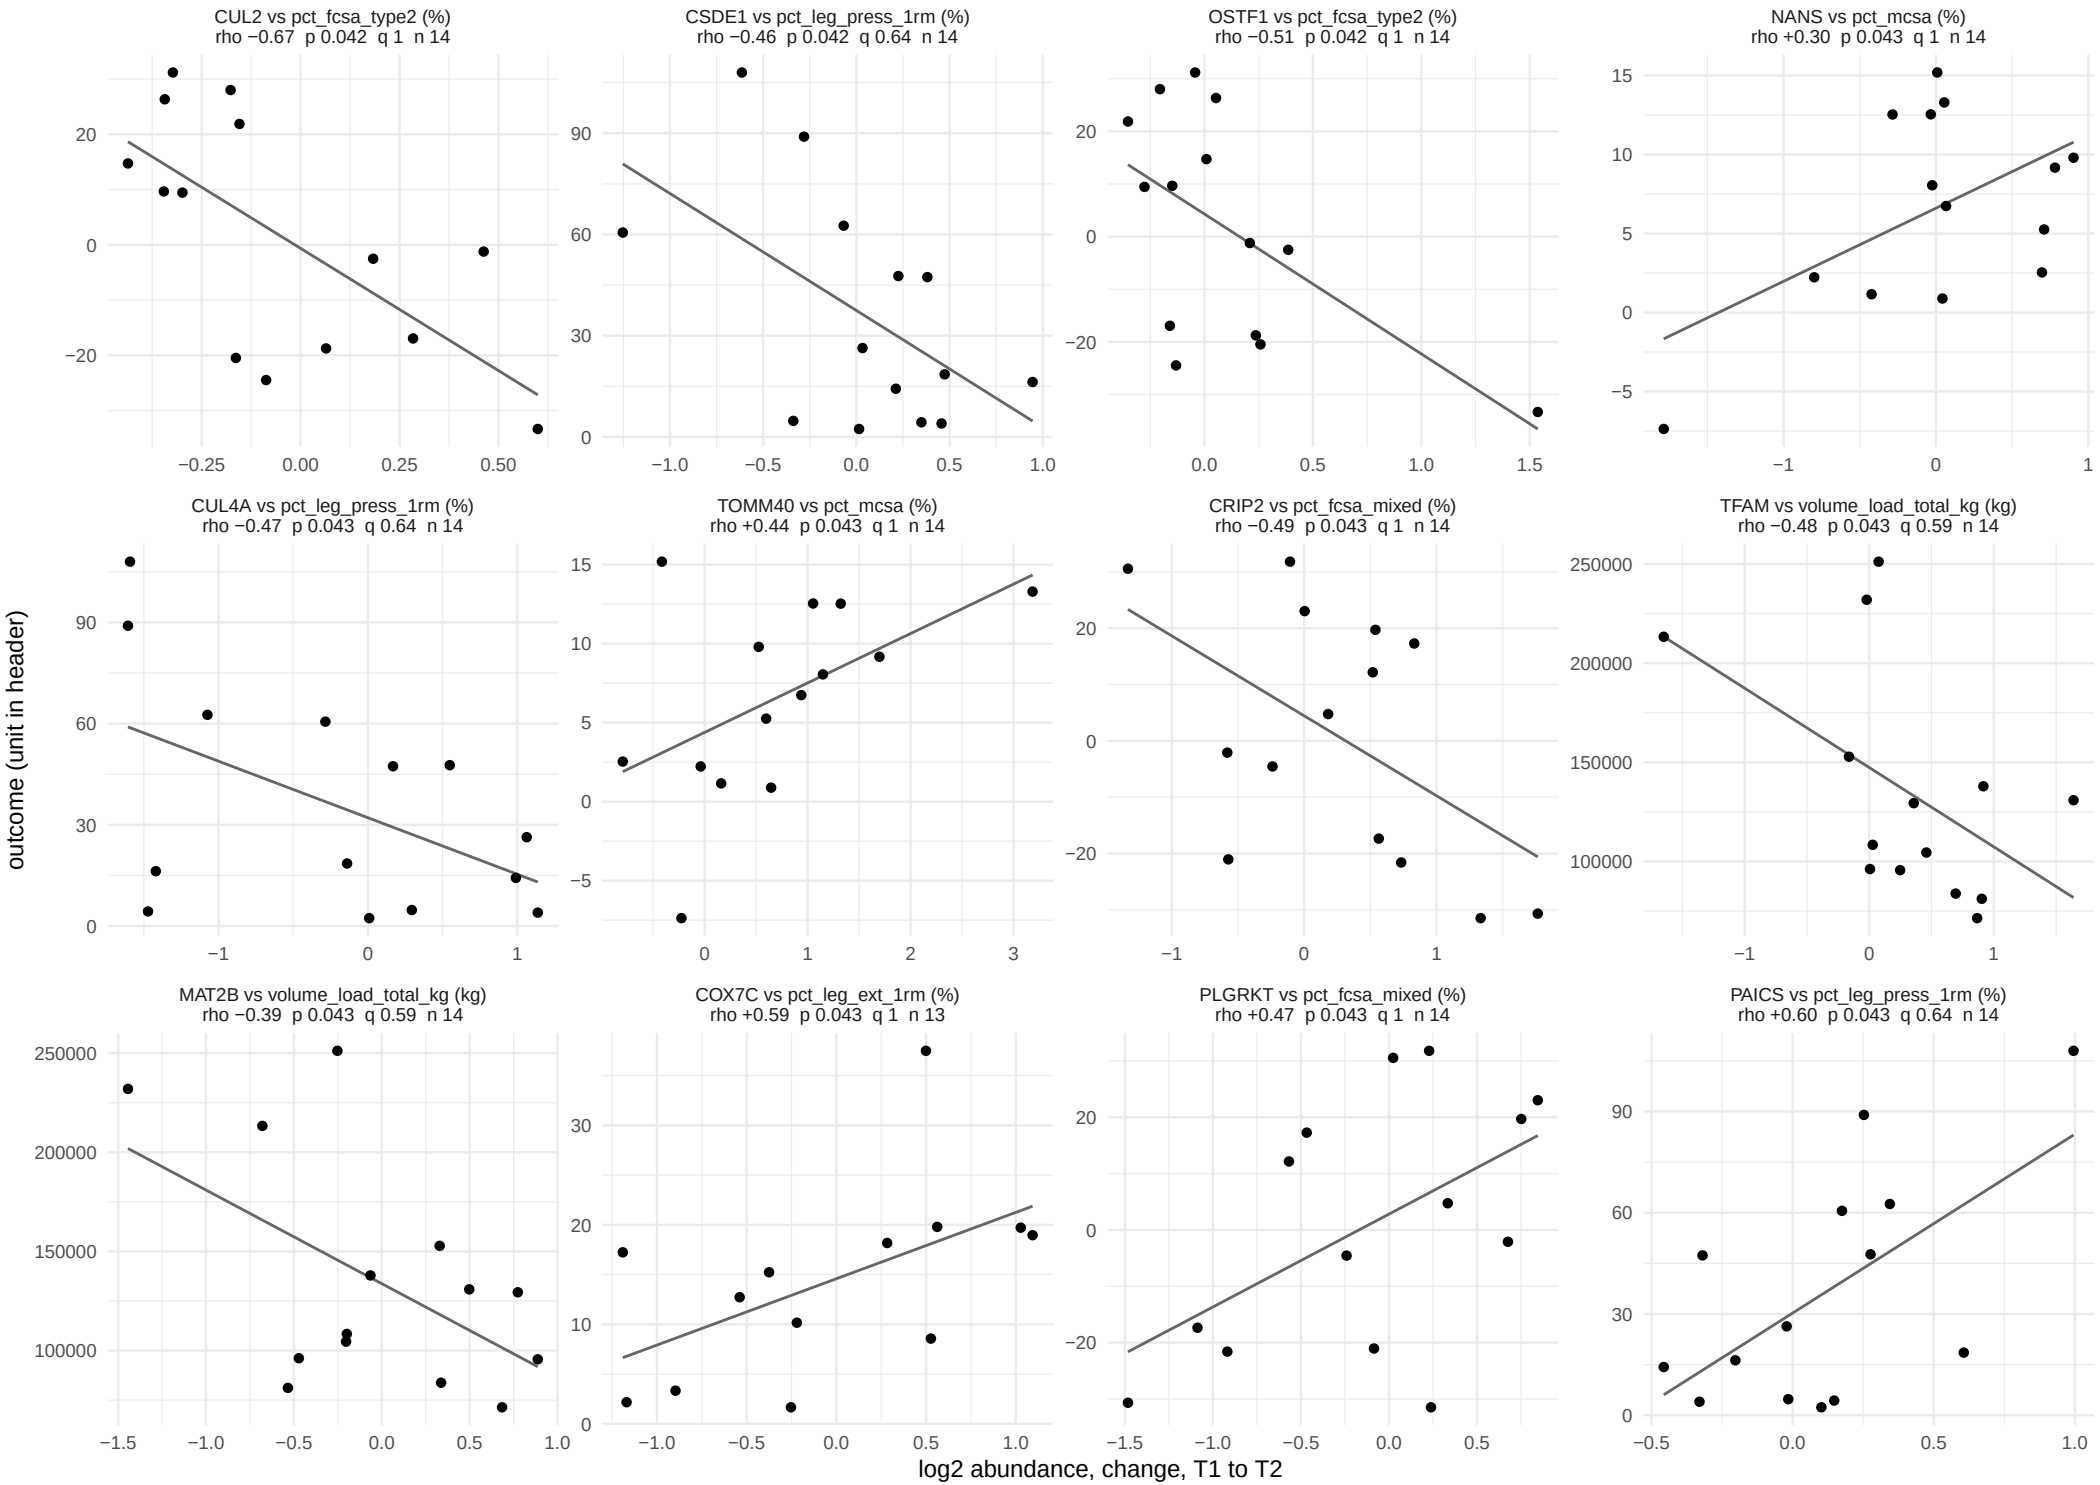

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, training window


605 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 44 of 51.

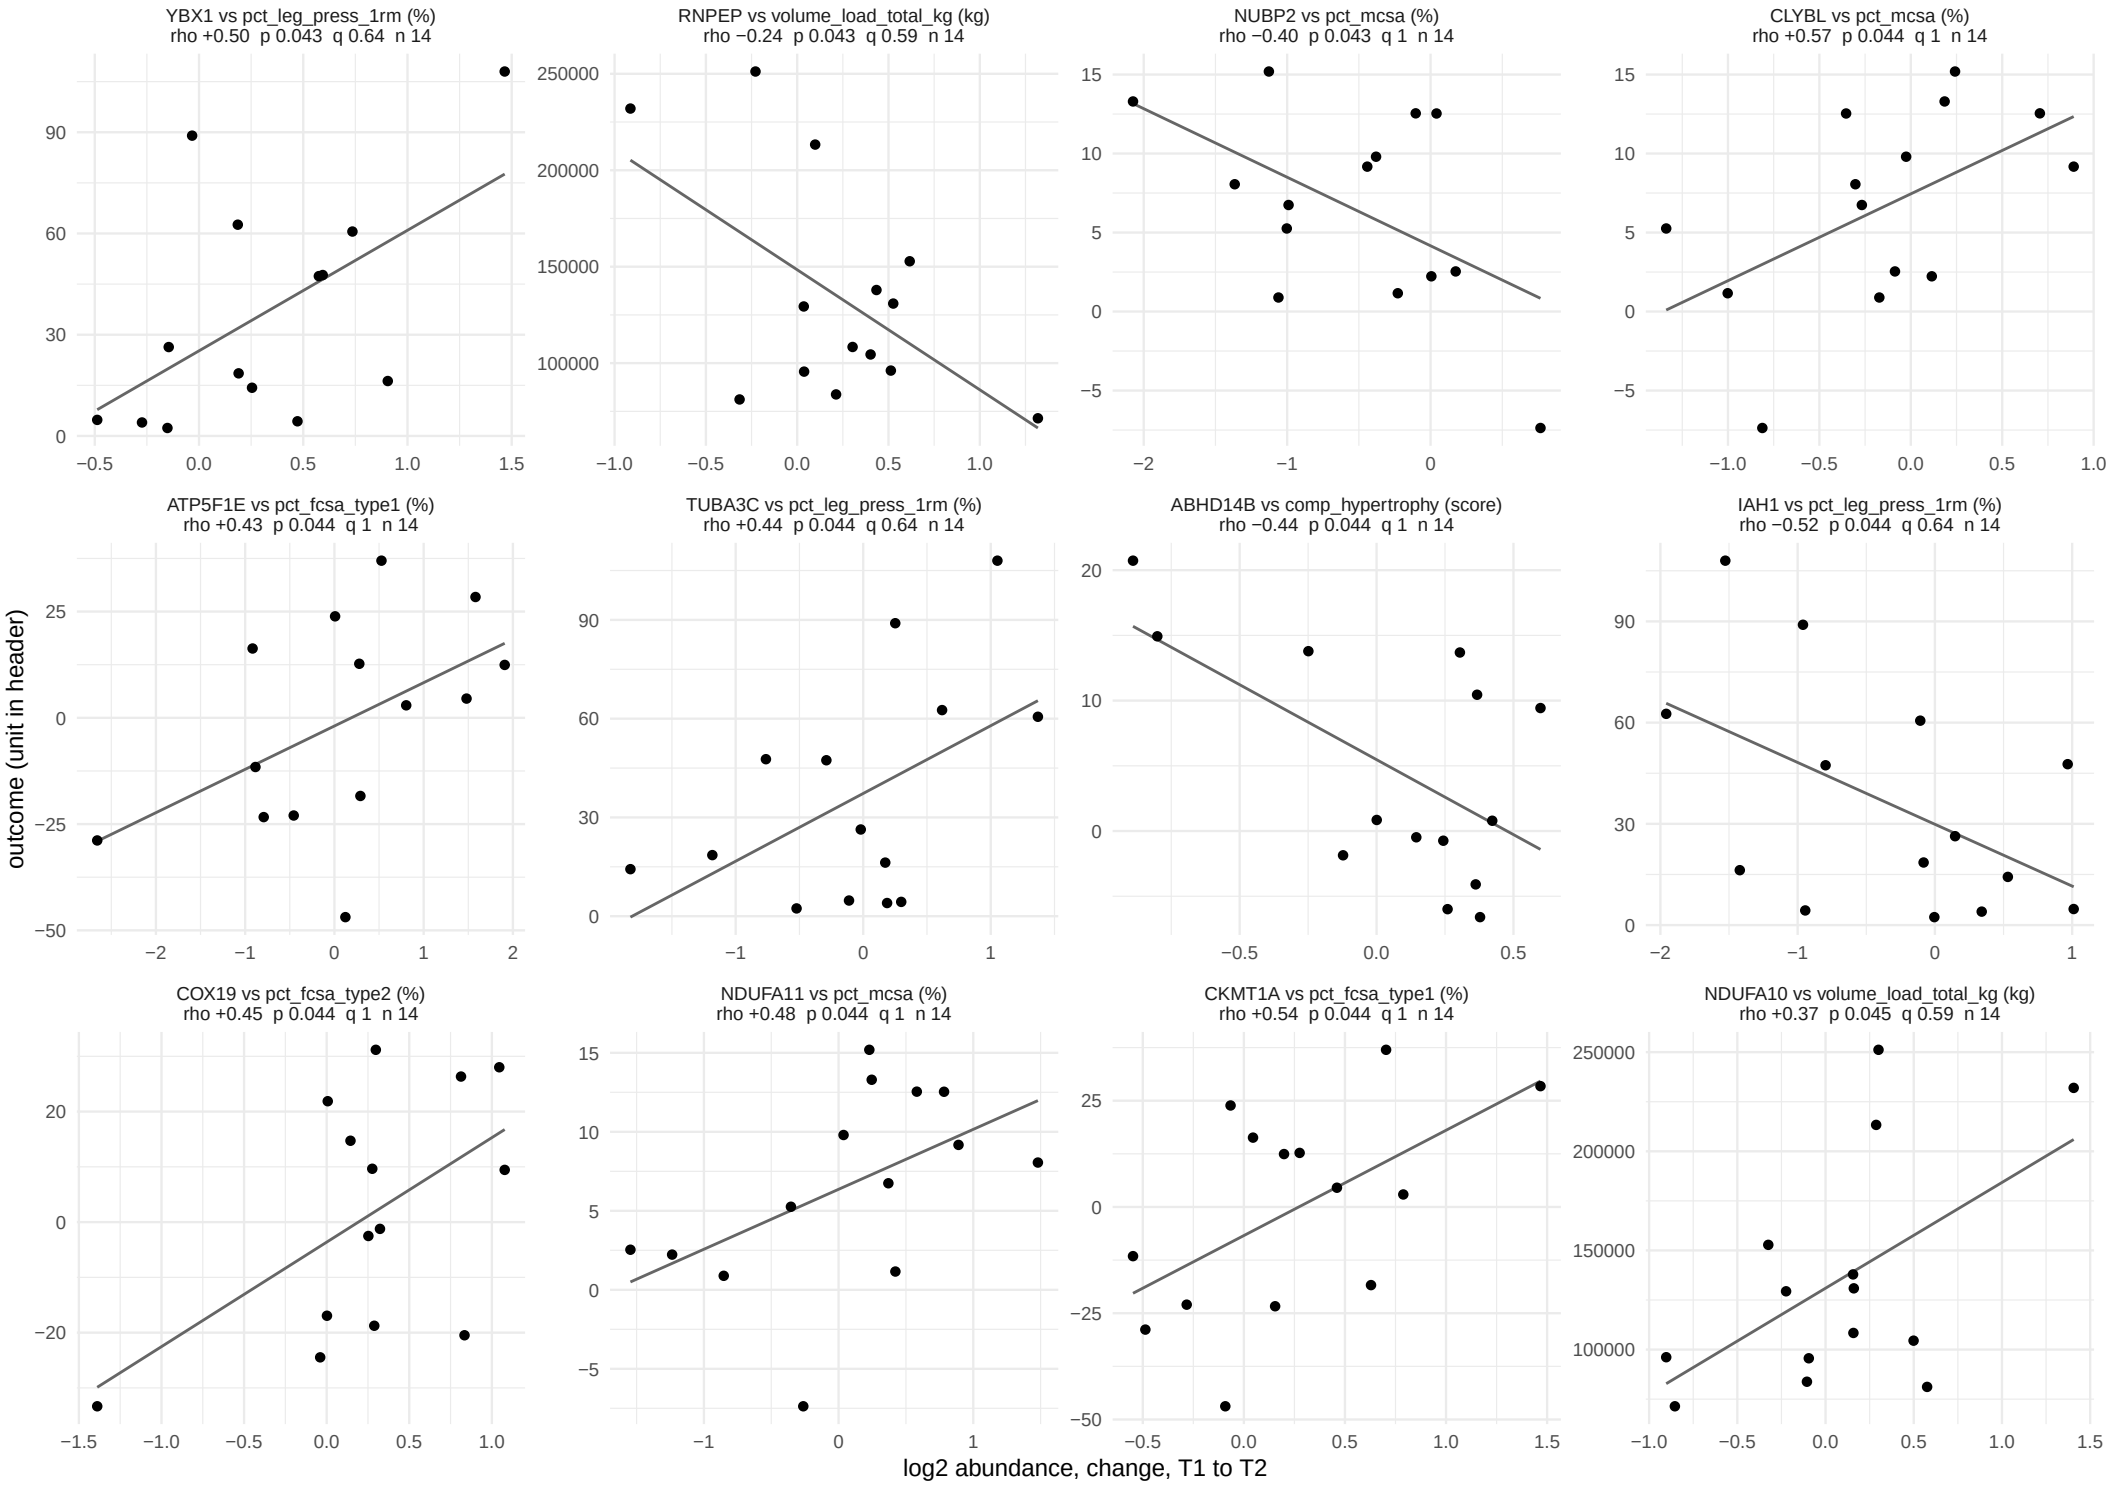

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, training window


605 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 45 of 51.

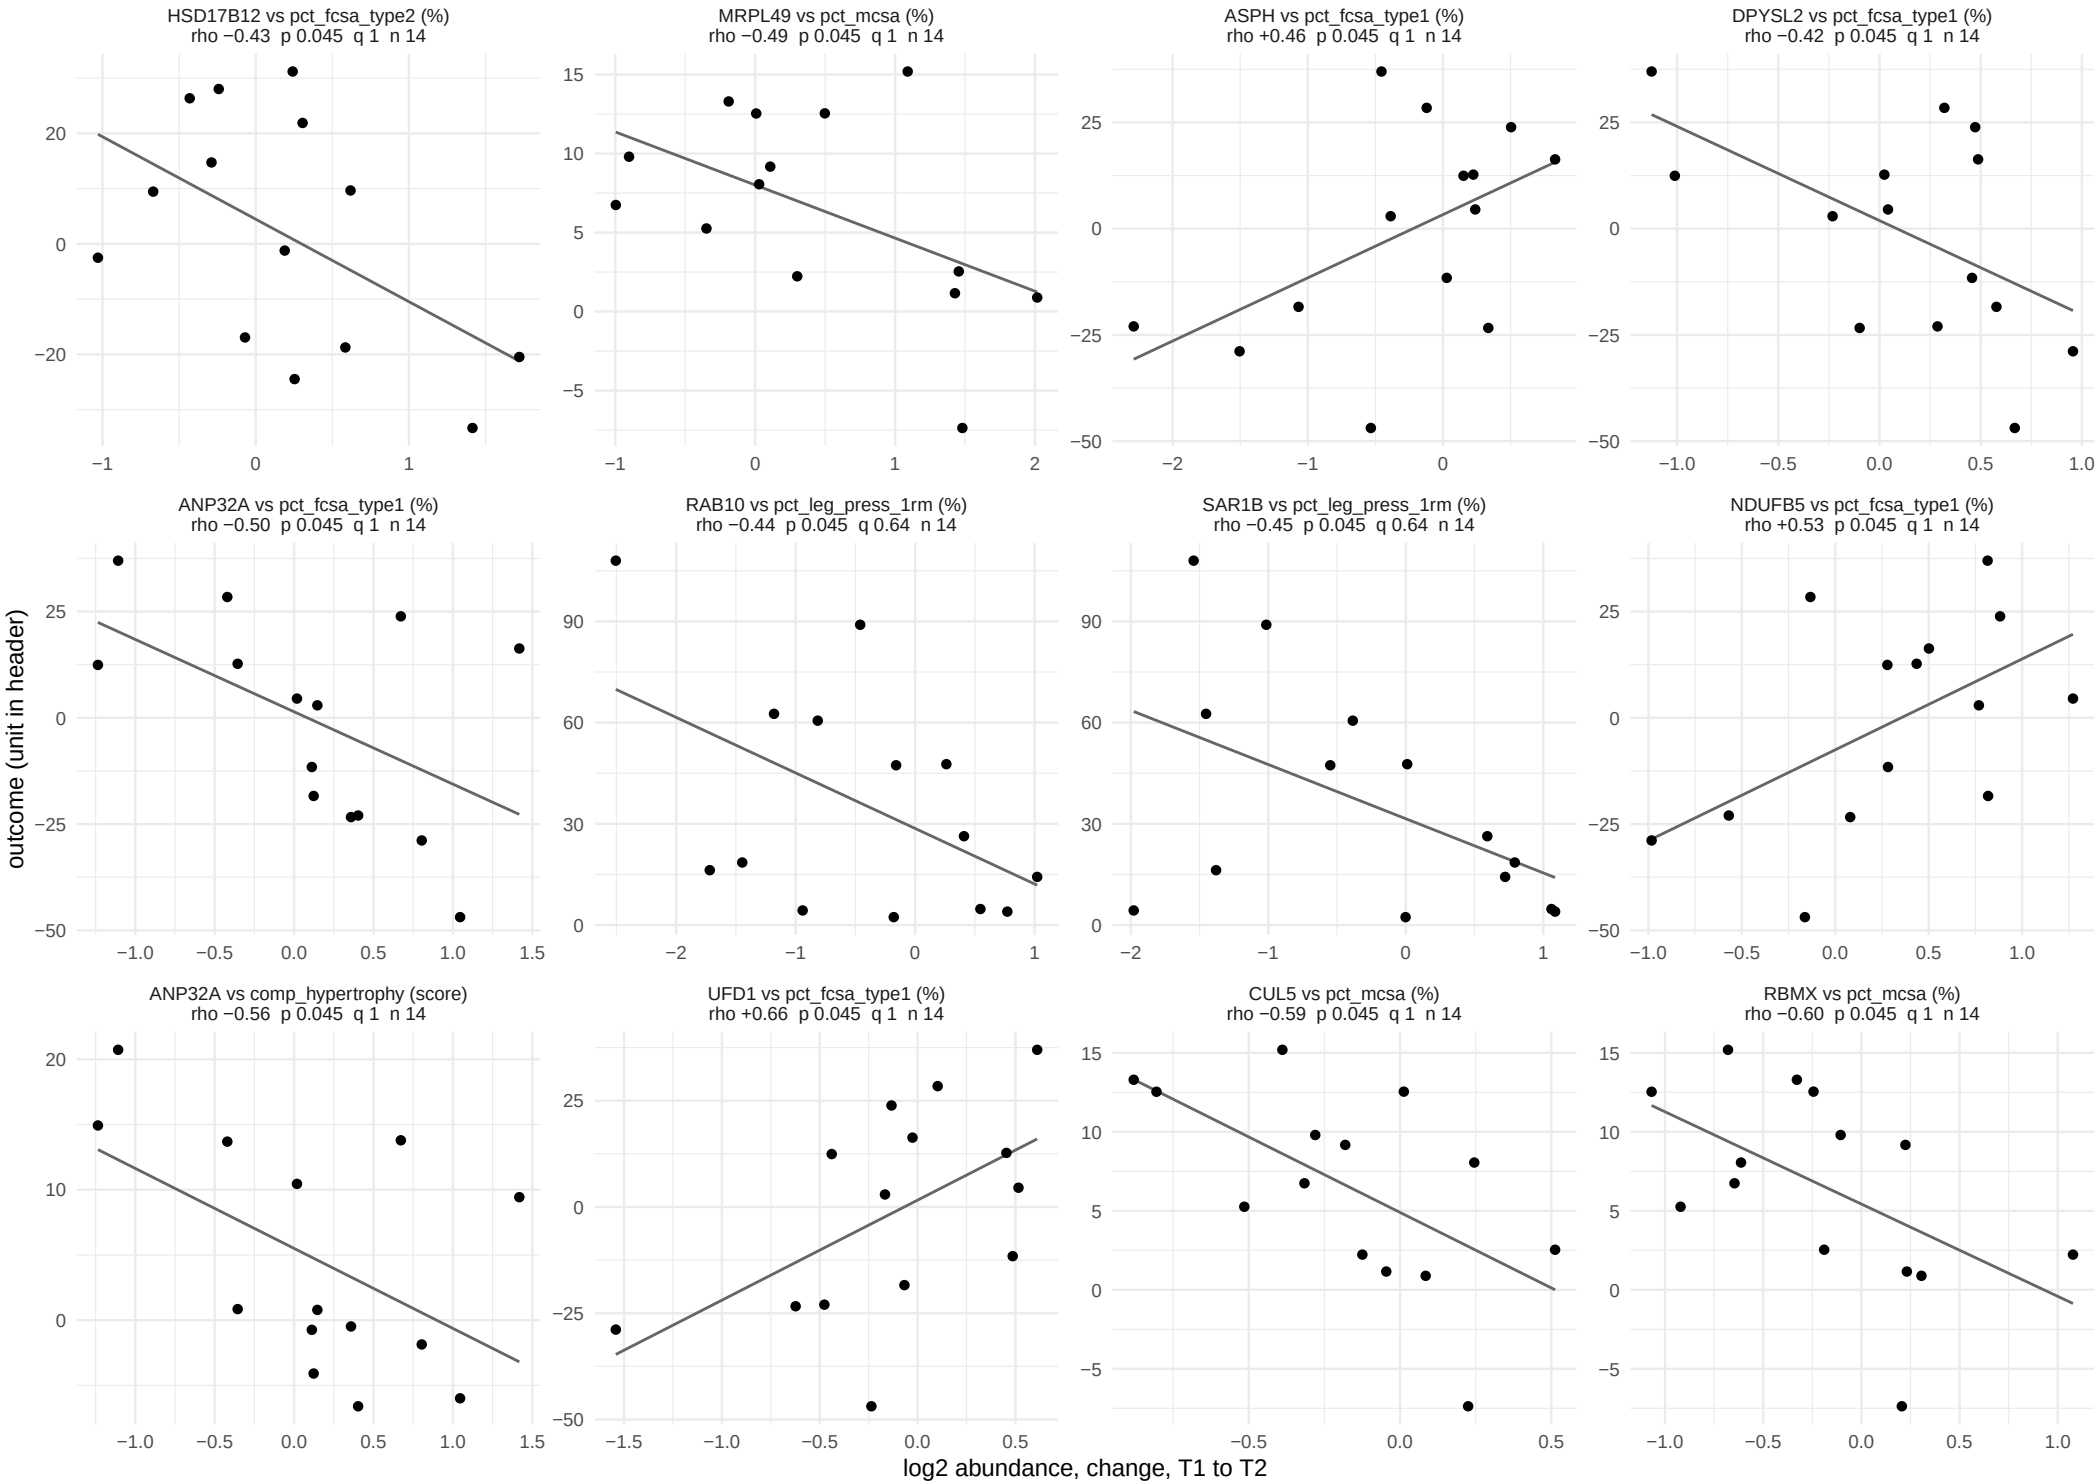

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, training window


605 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 46 of 51.

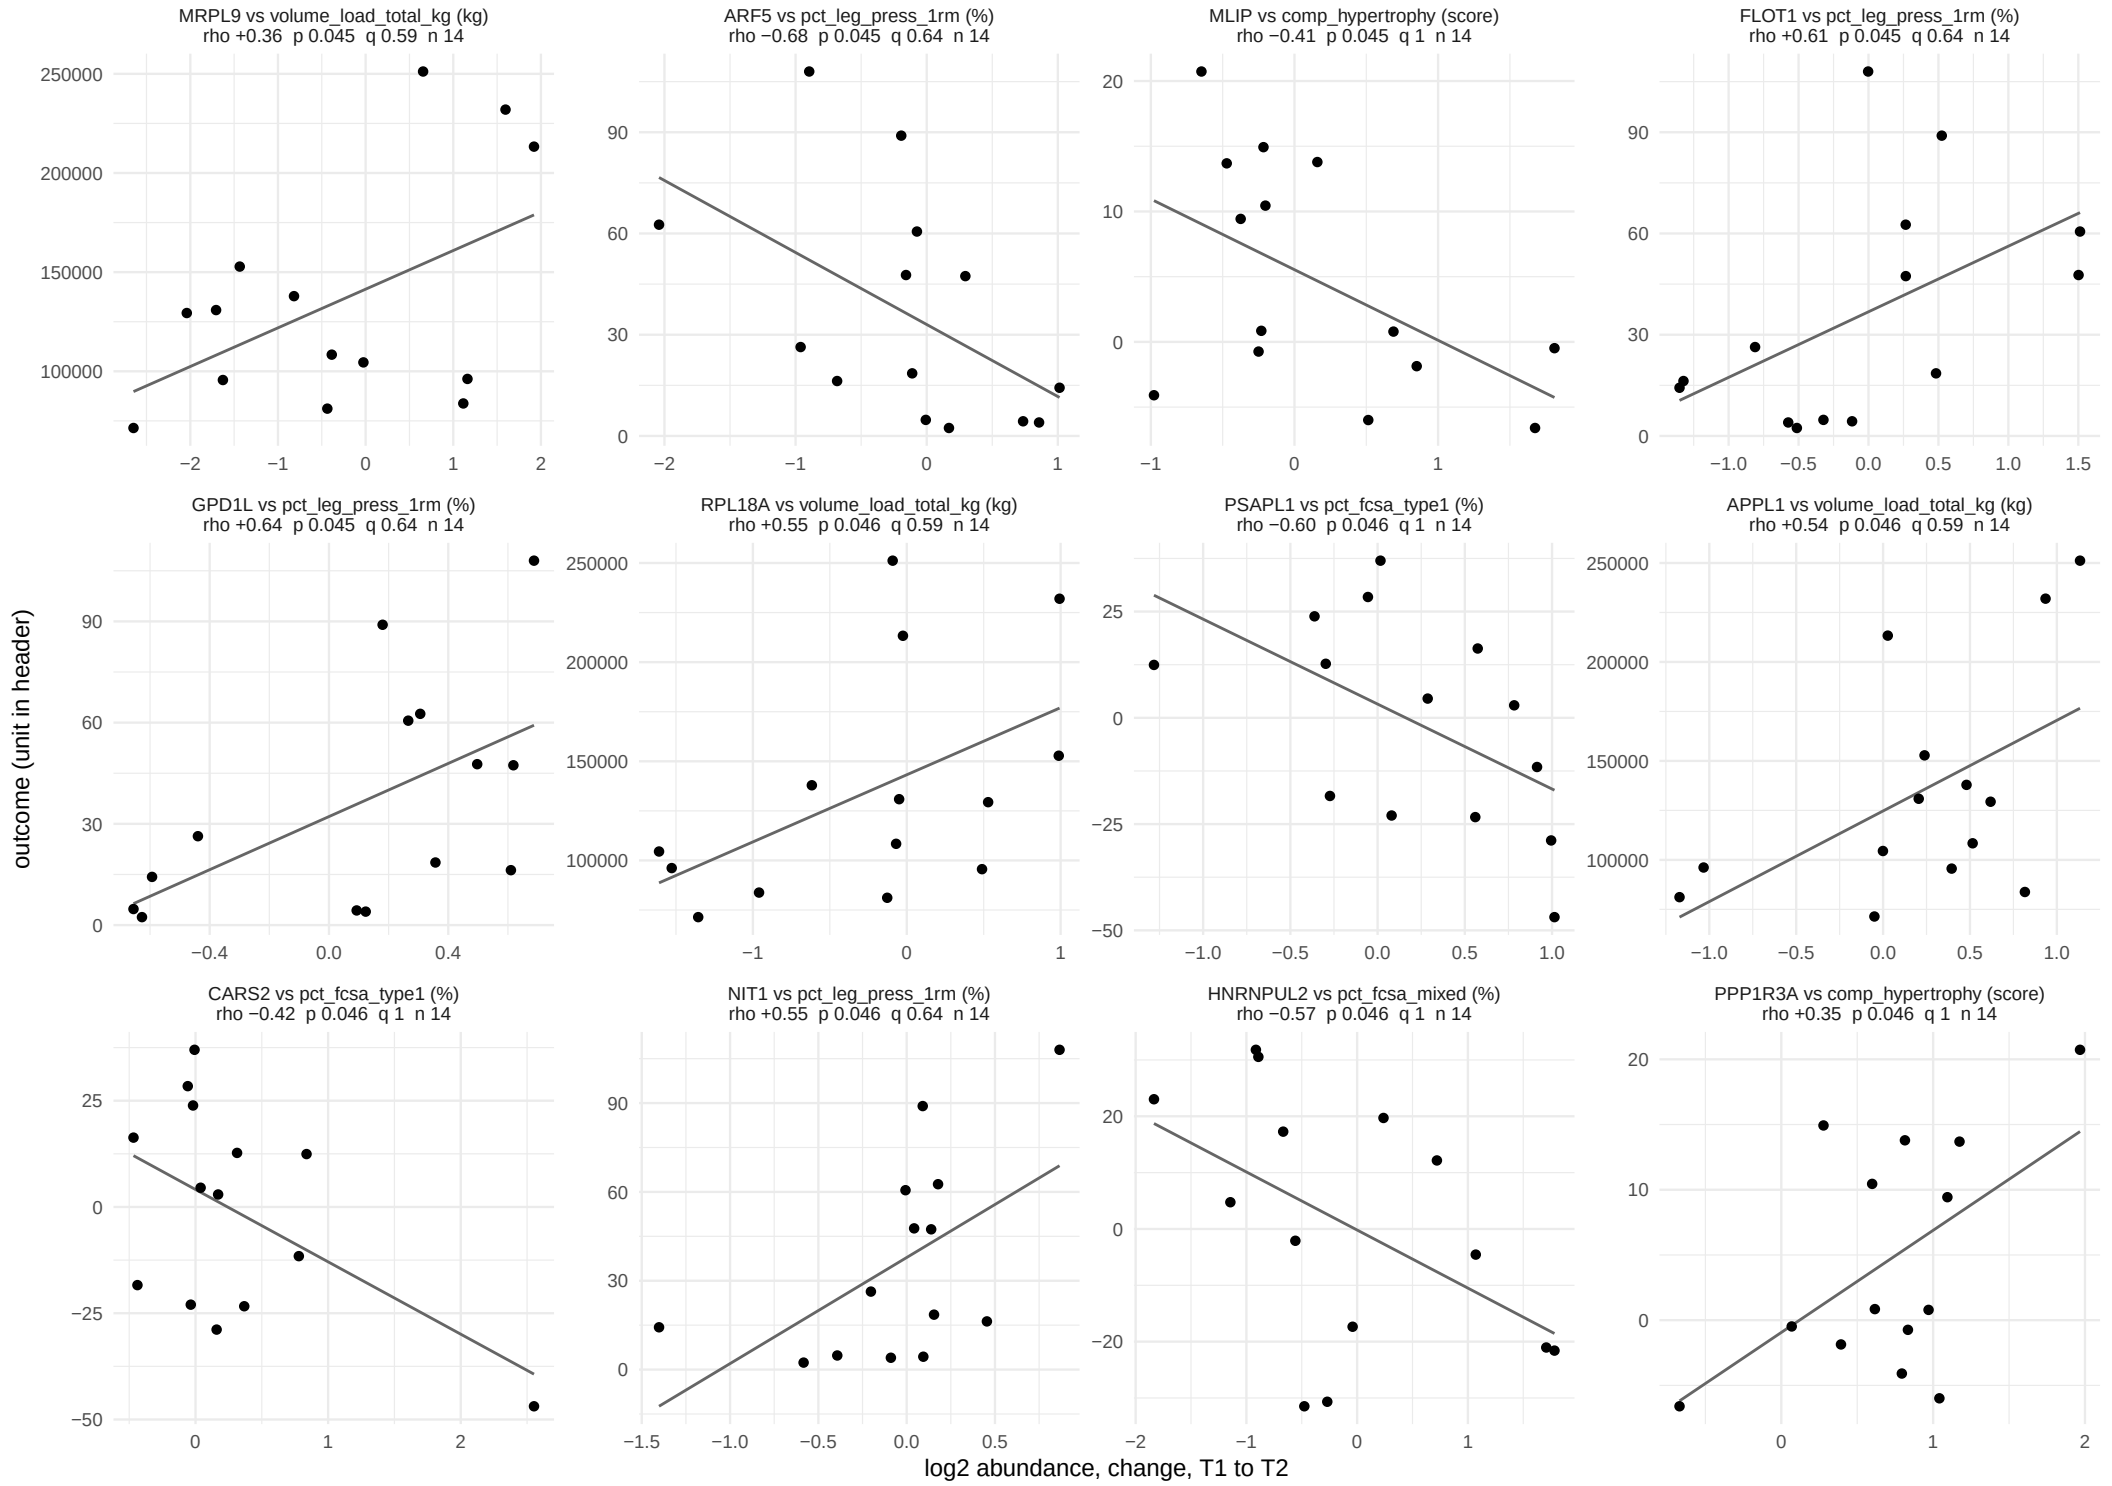

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, training window


605 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 47 of 51.

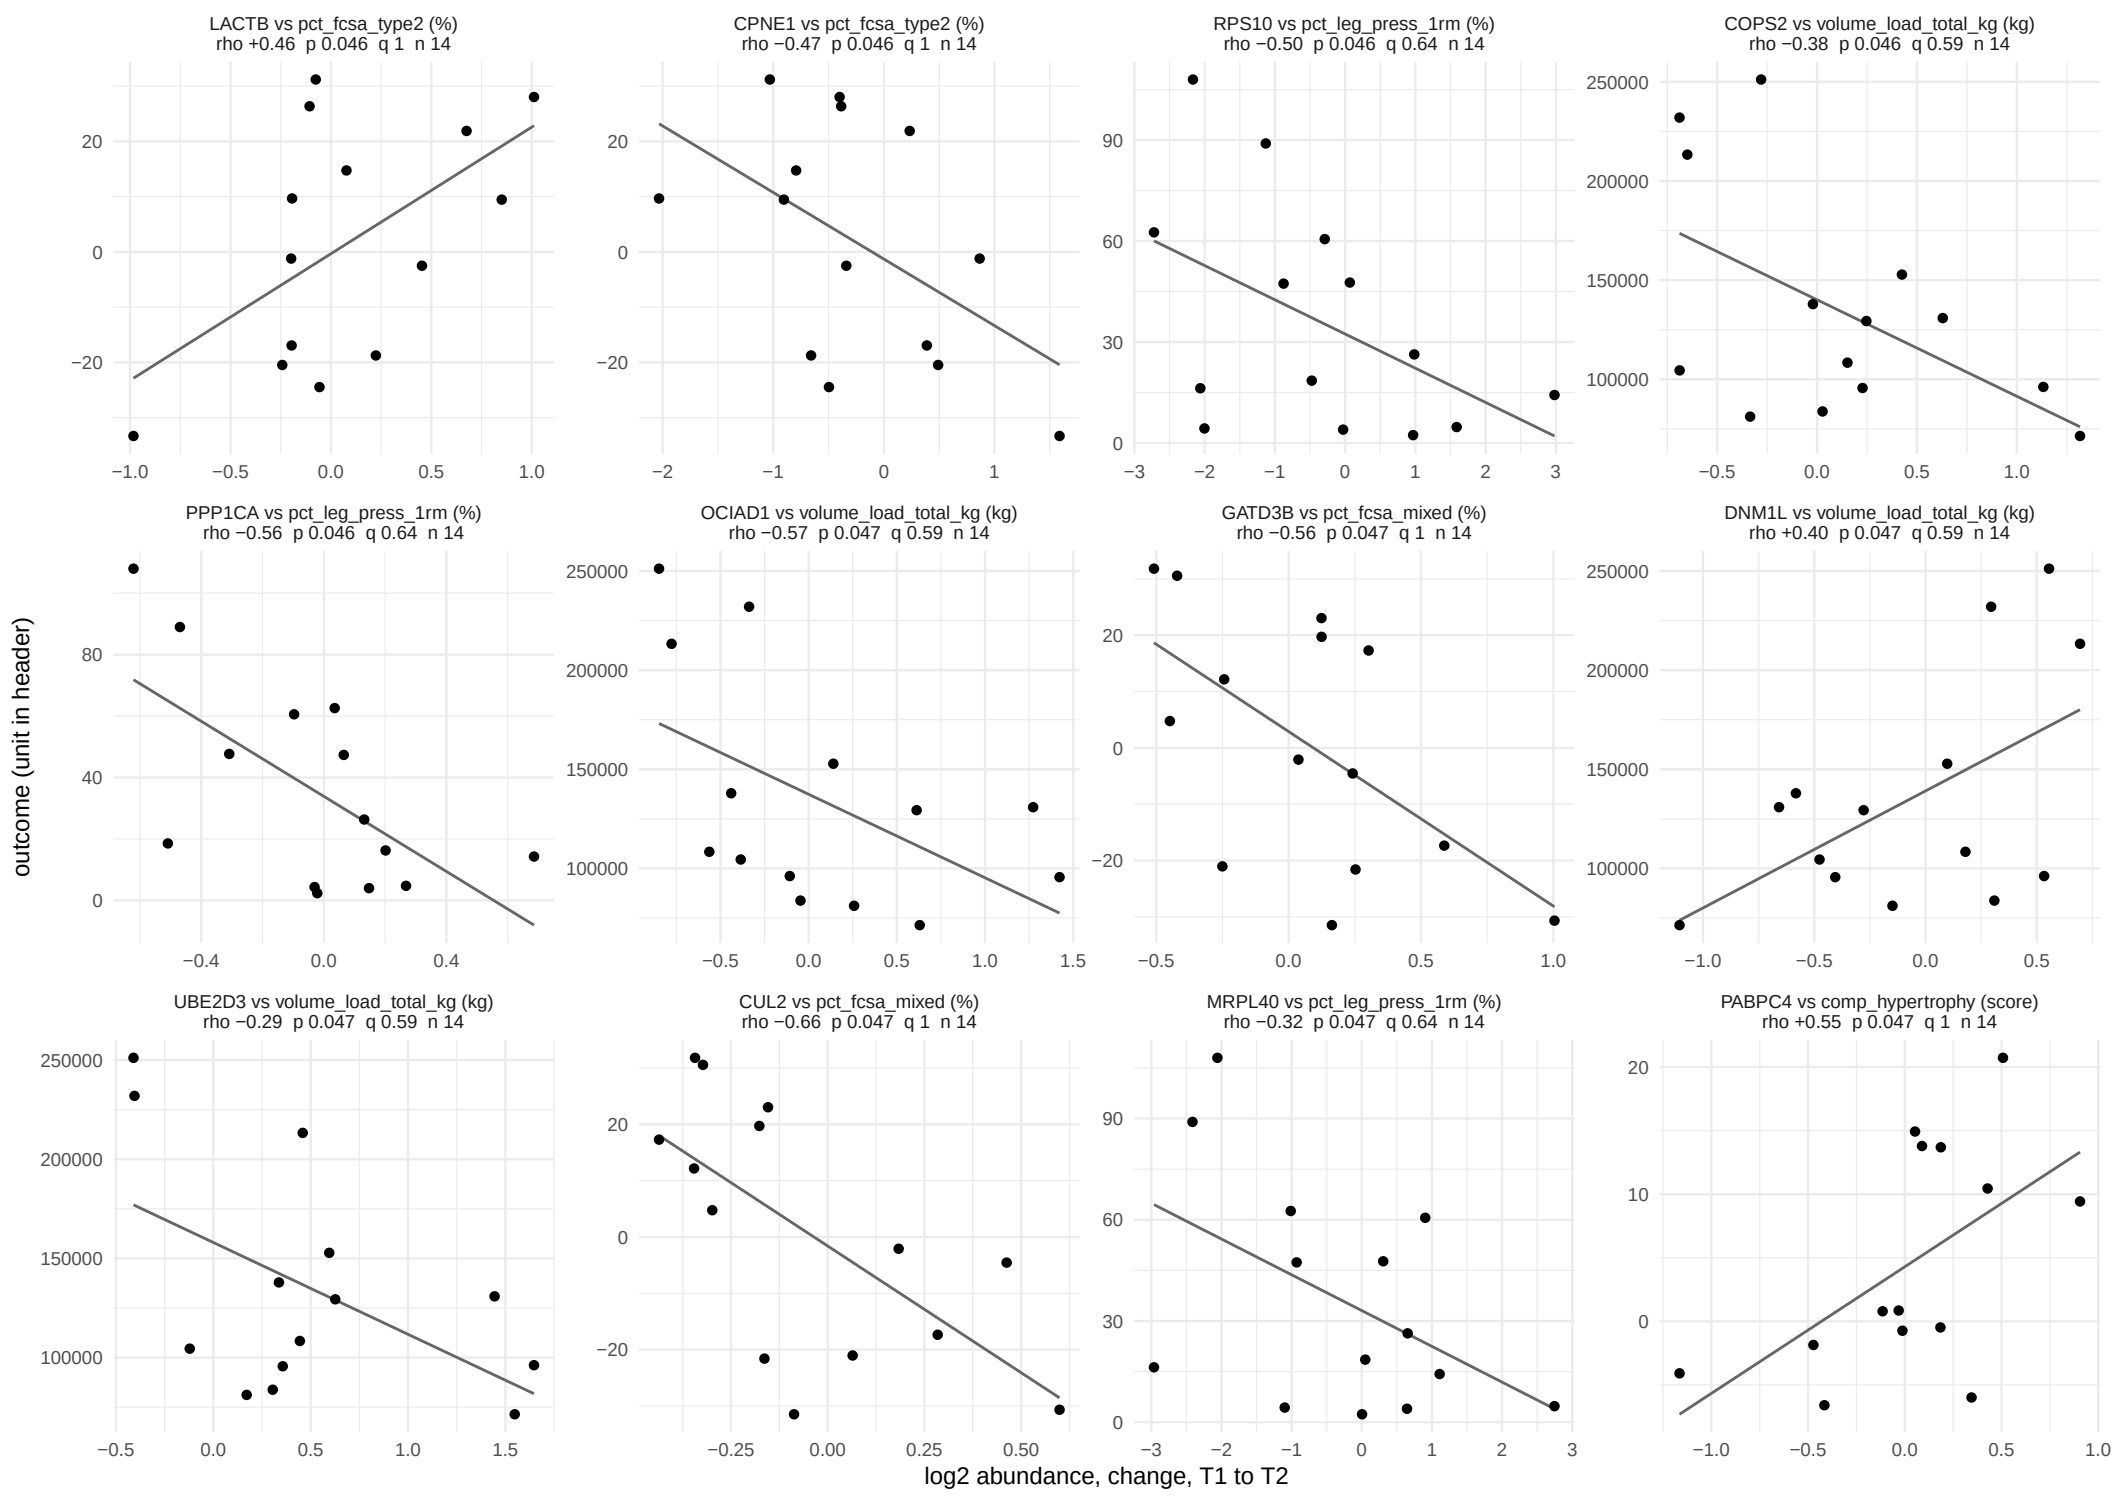

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, training window


605 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 48 of 51.

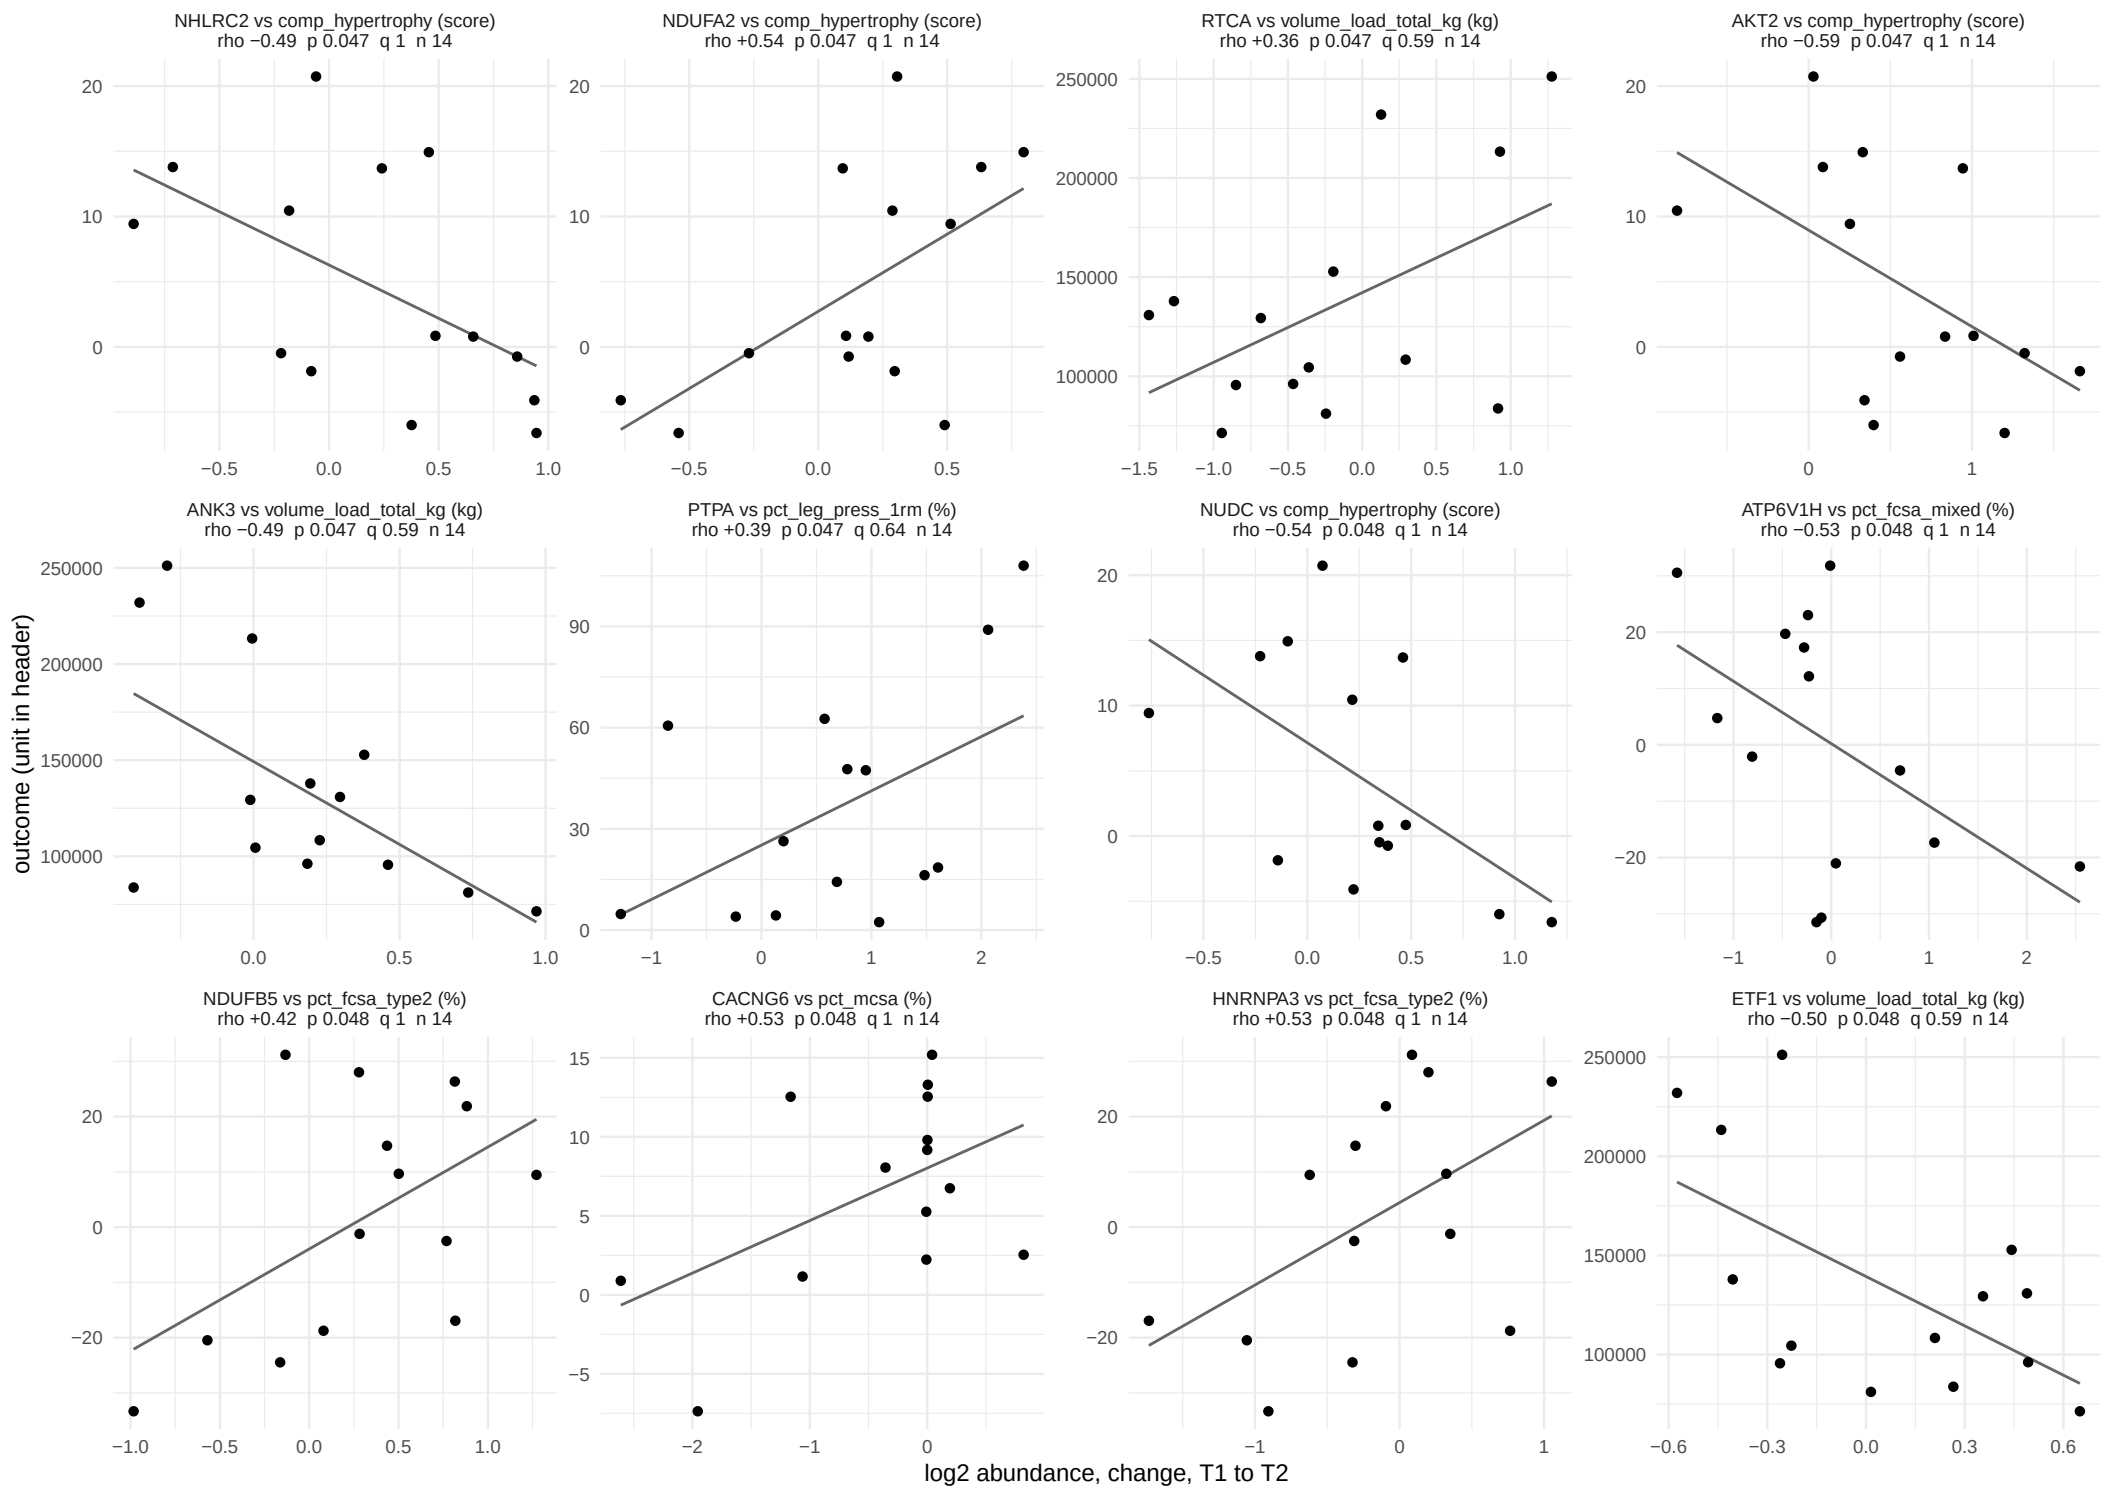

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, training window


605 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 49 of 51.

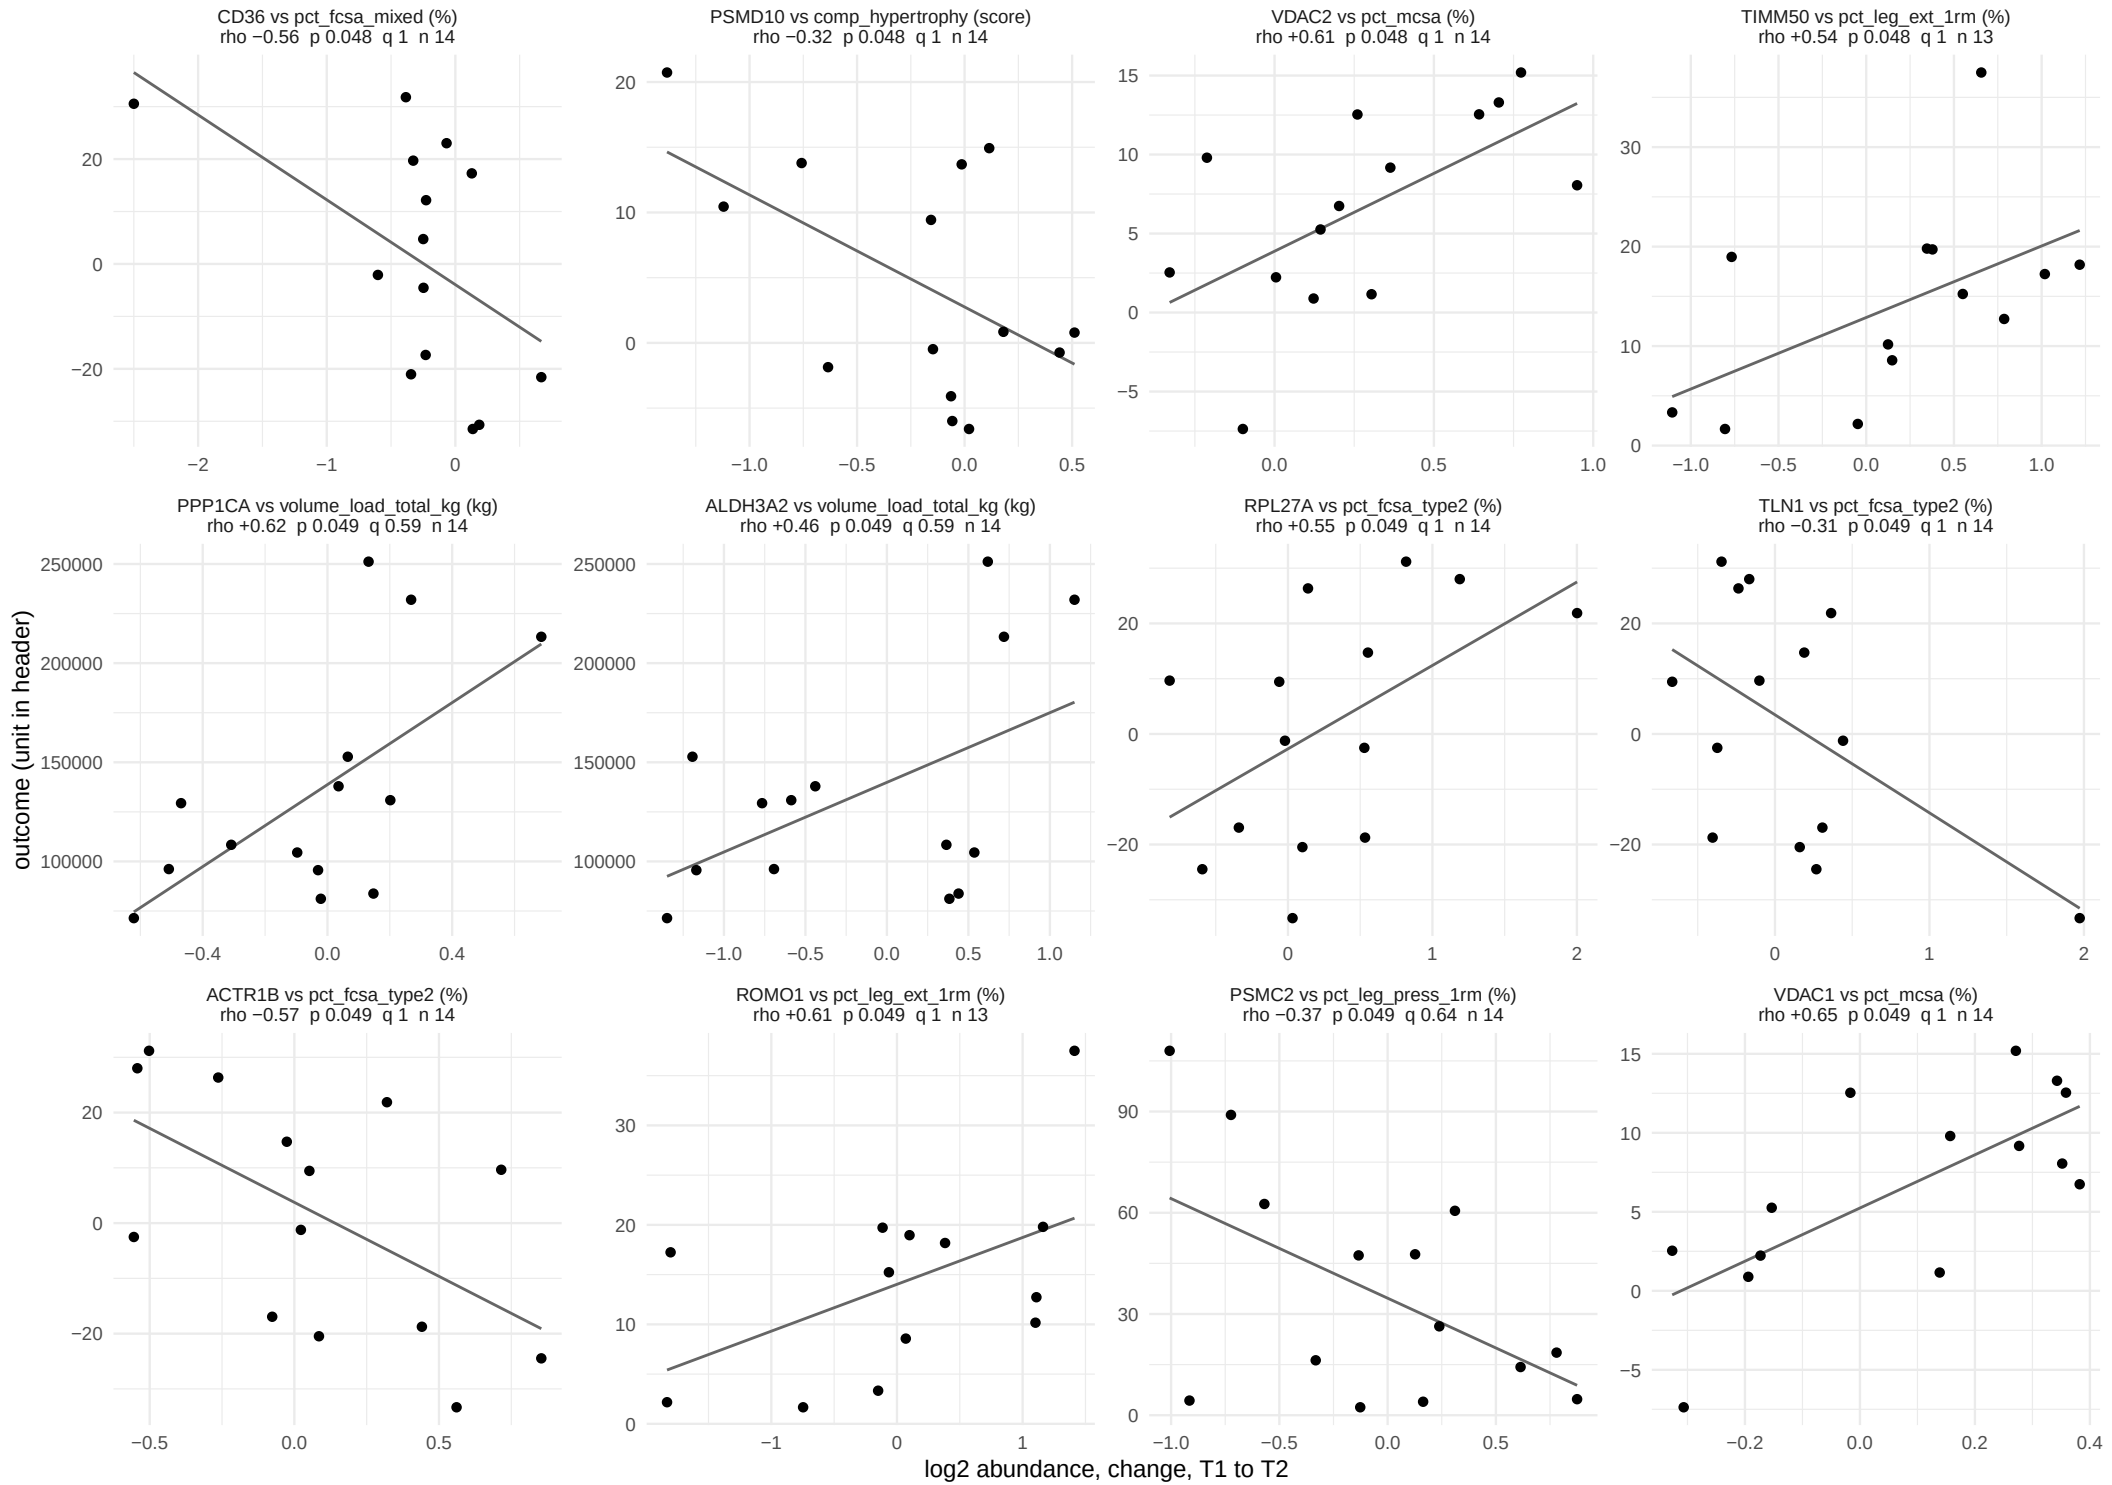

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, training window


605 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 50 of 51.

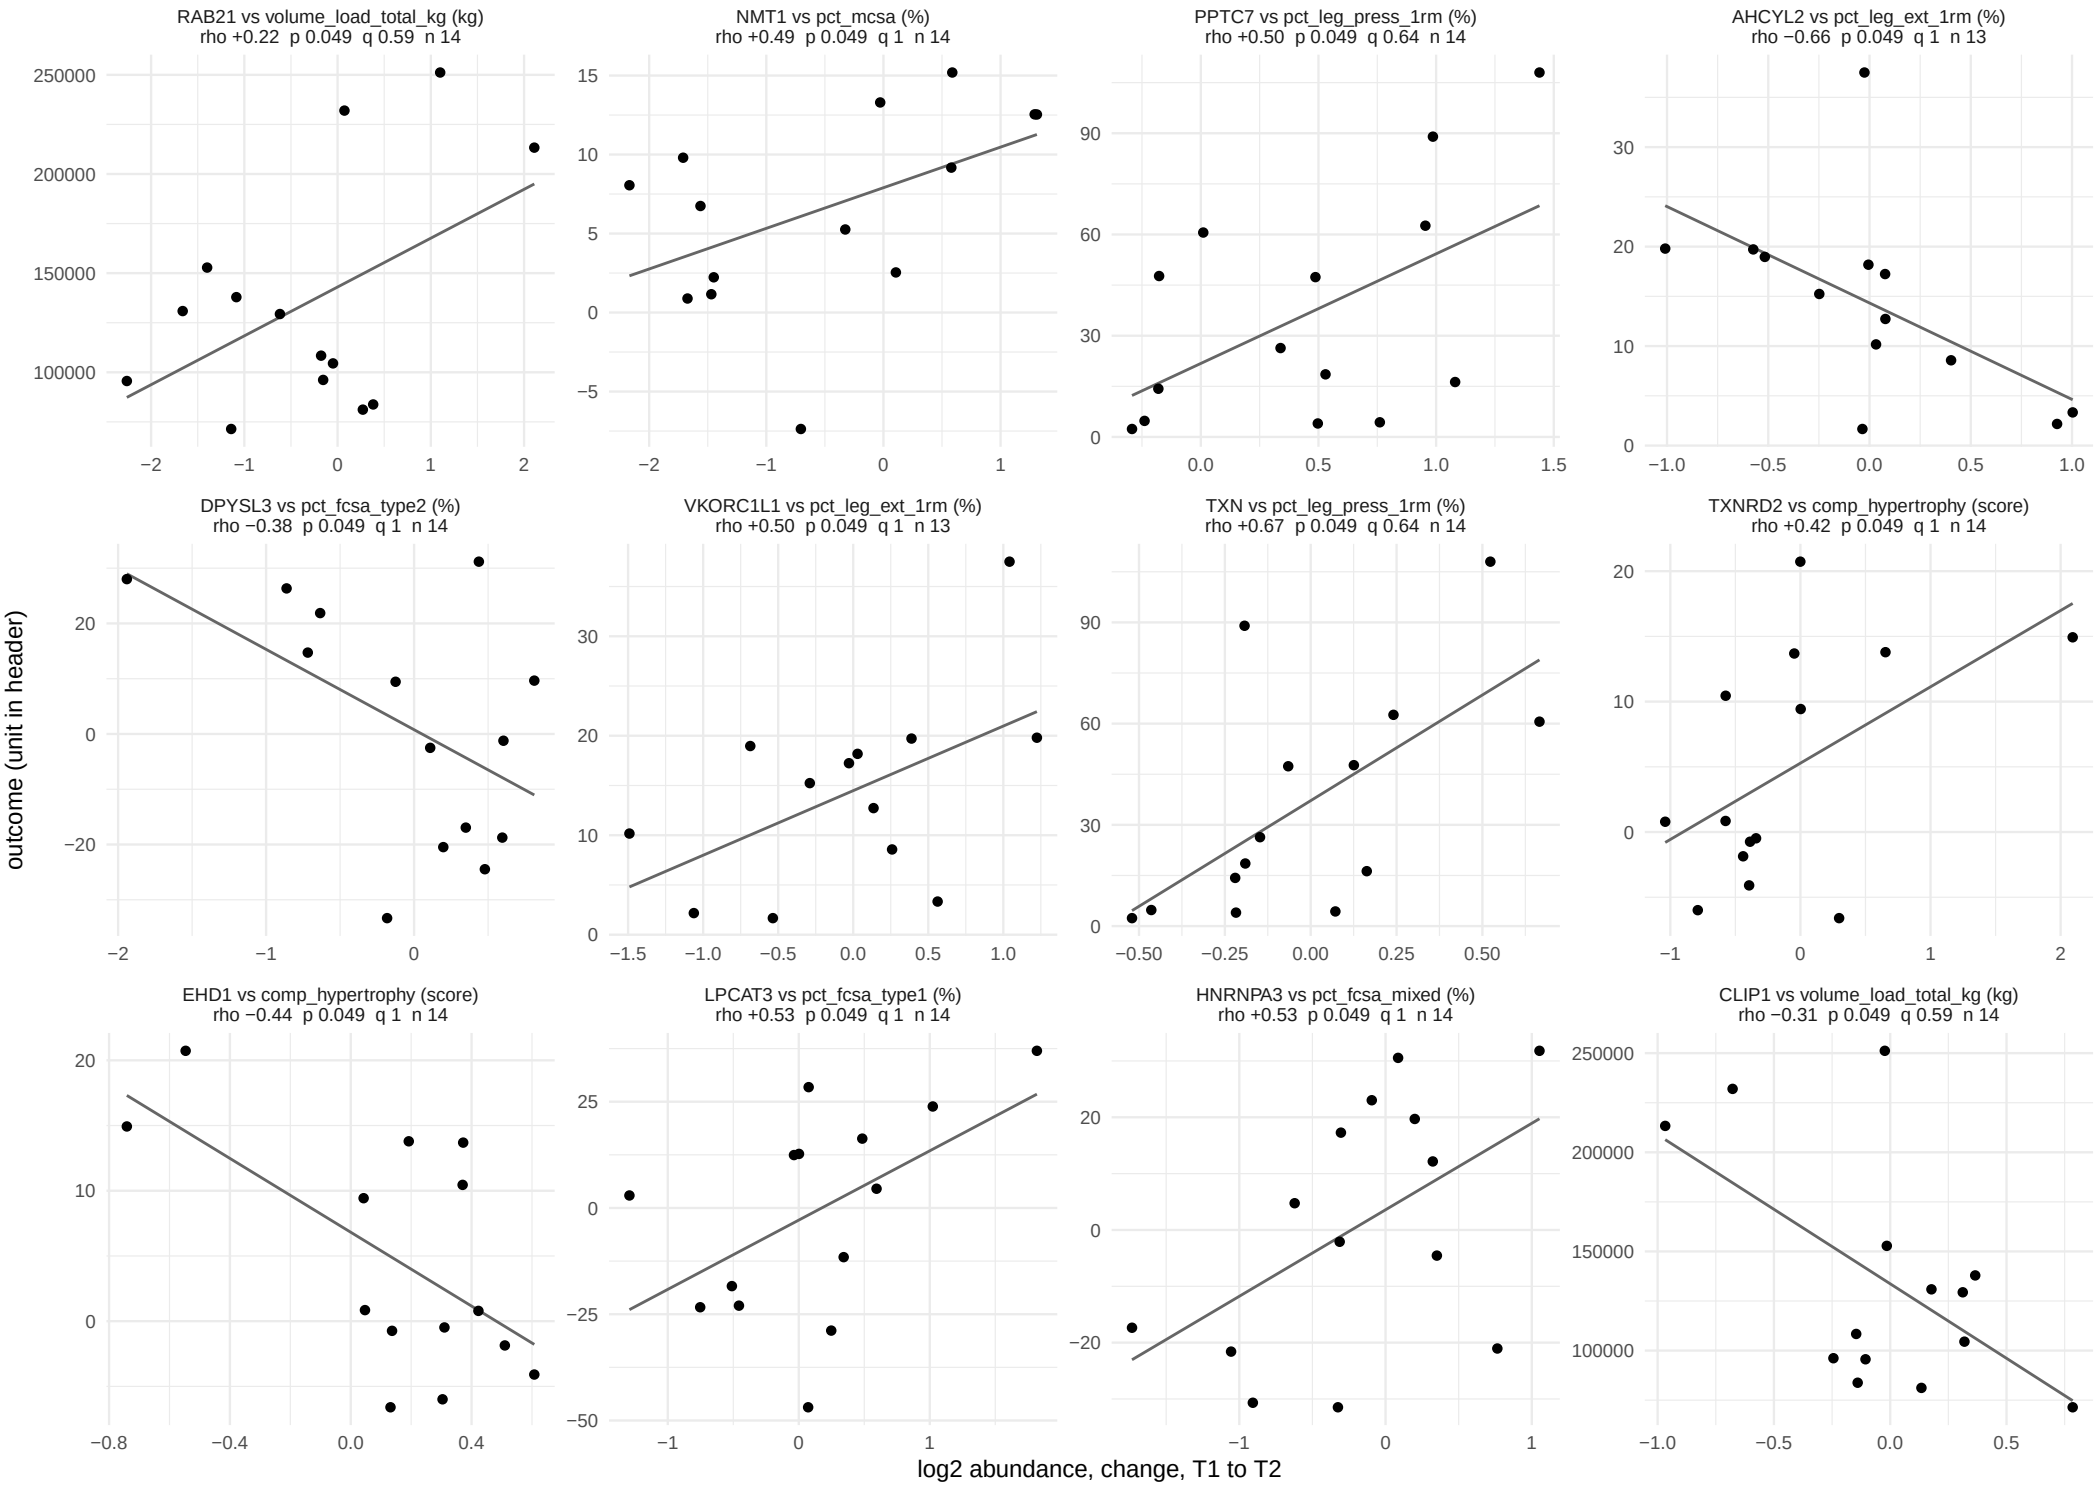

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, training window


605 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 51 of 51.

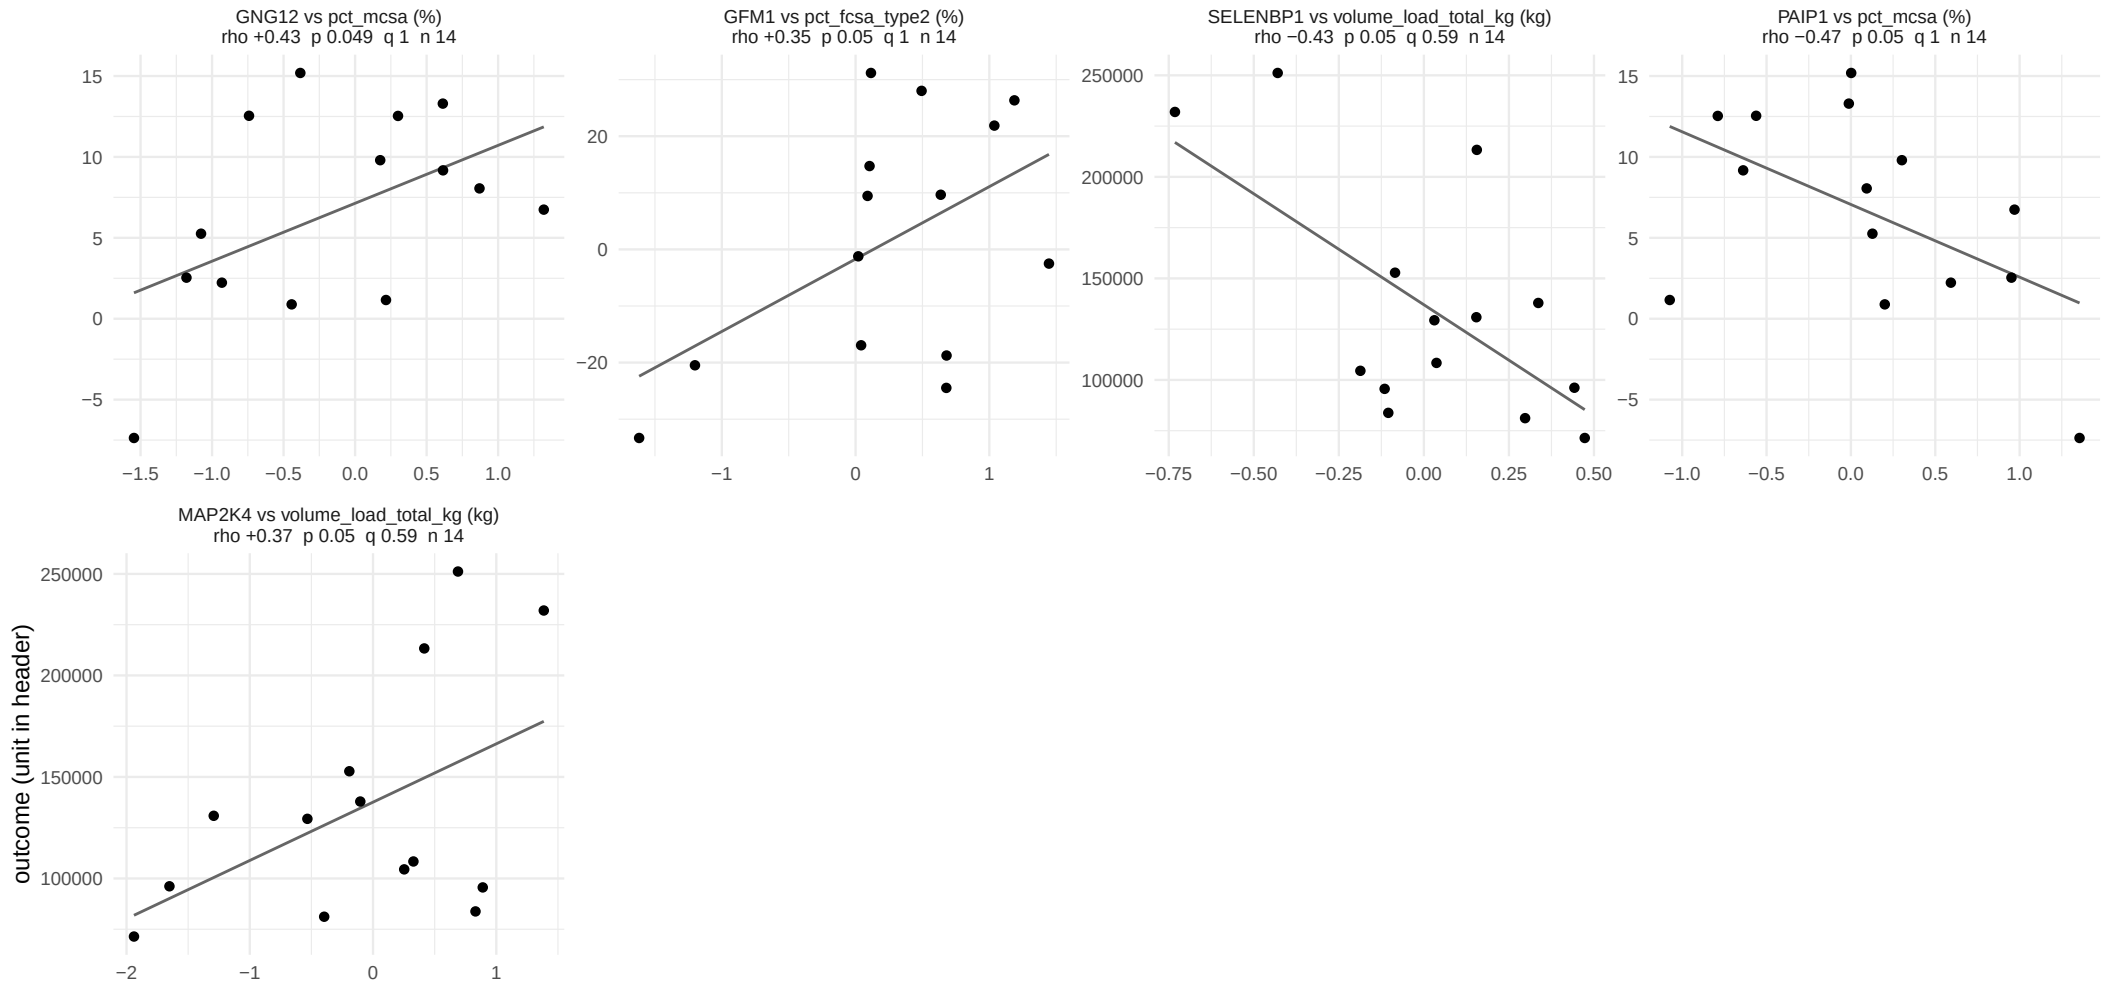

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline window


686 of 15200 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 1 of 58.

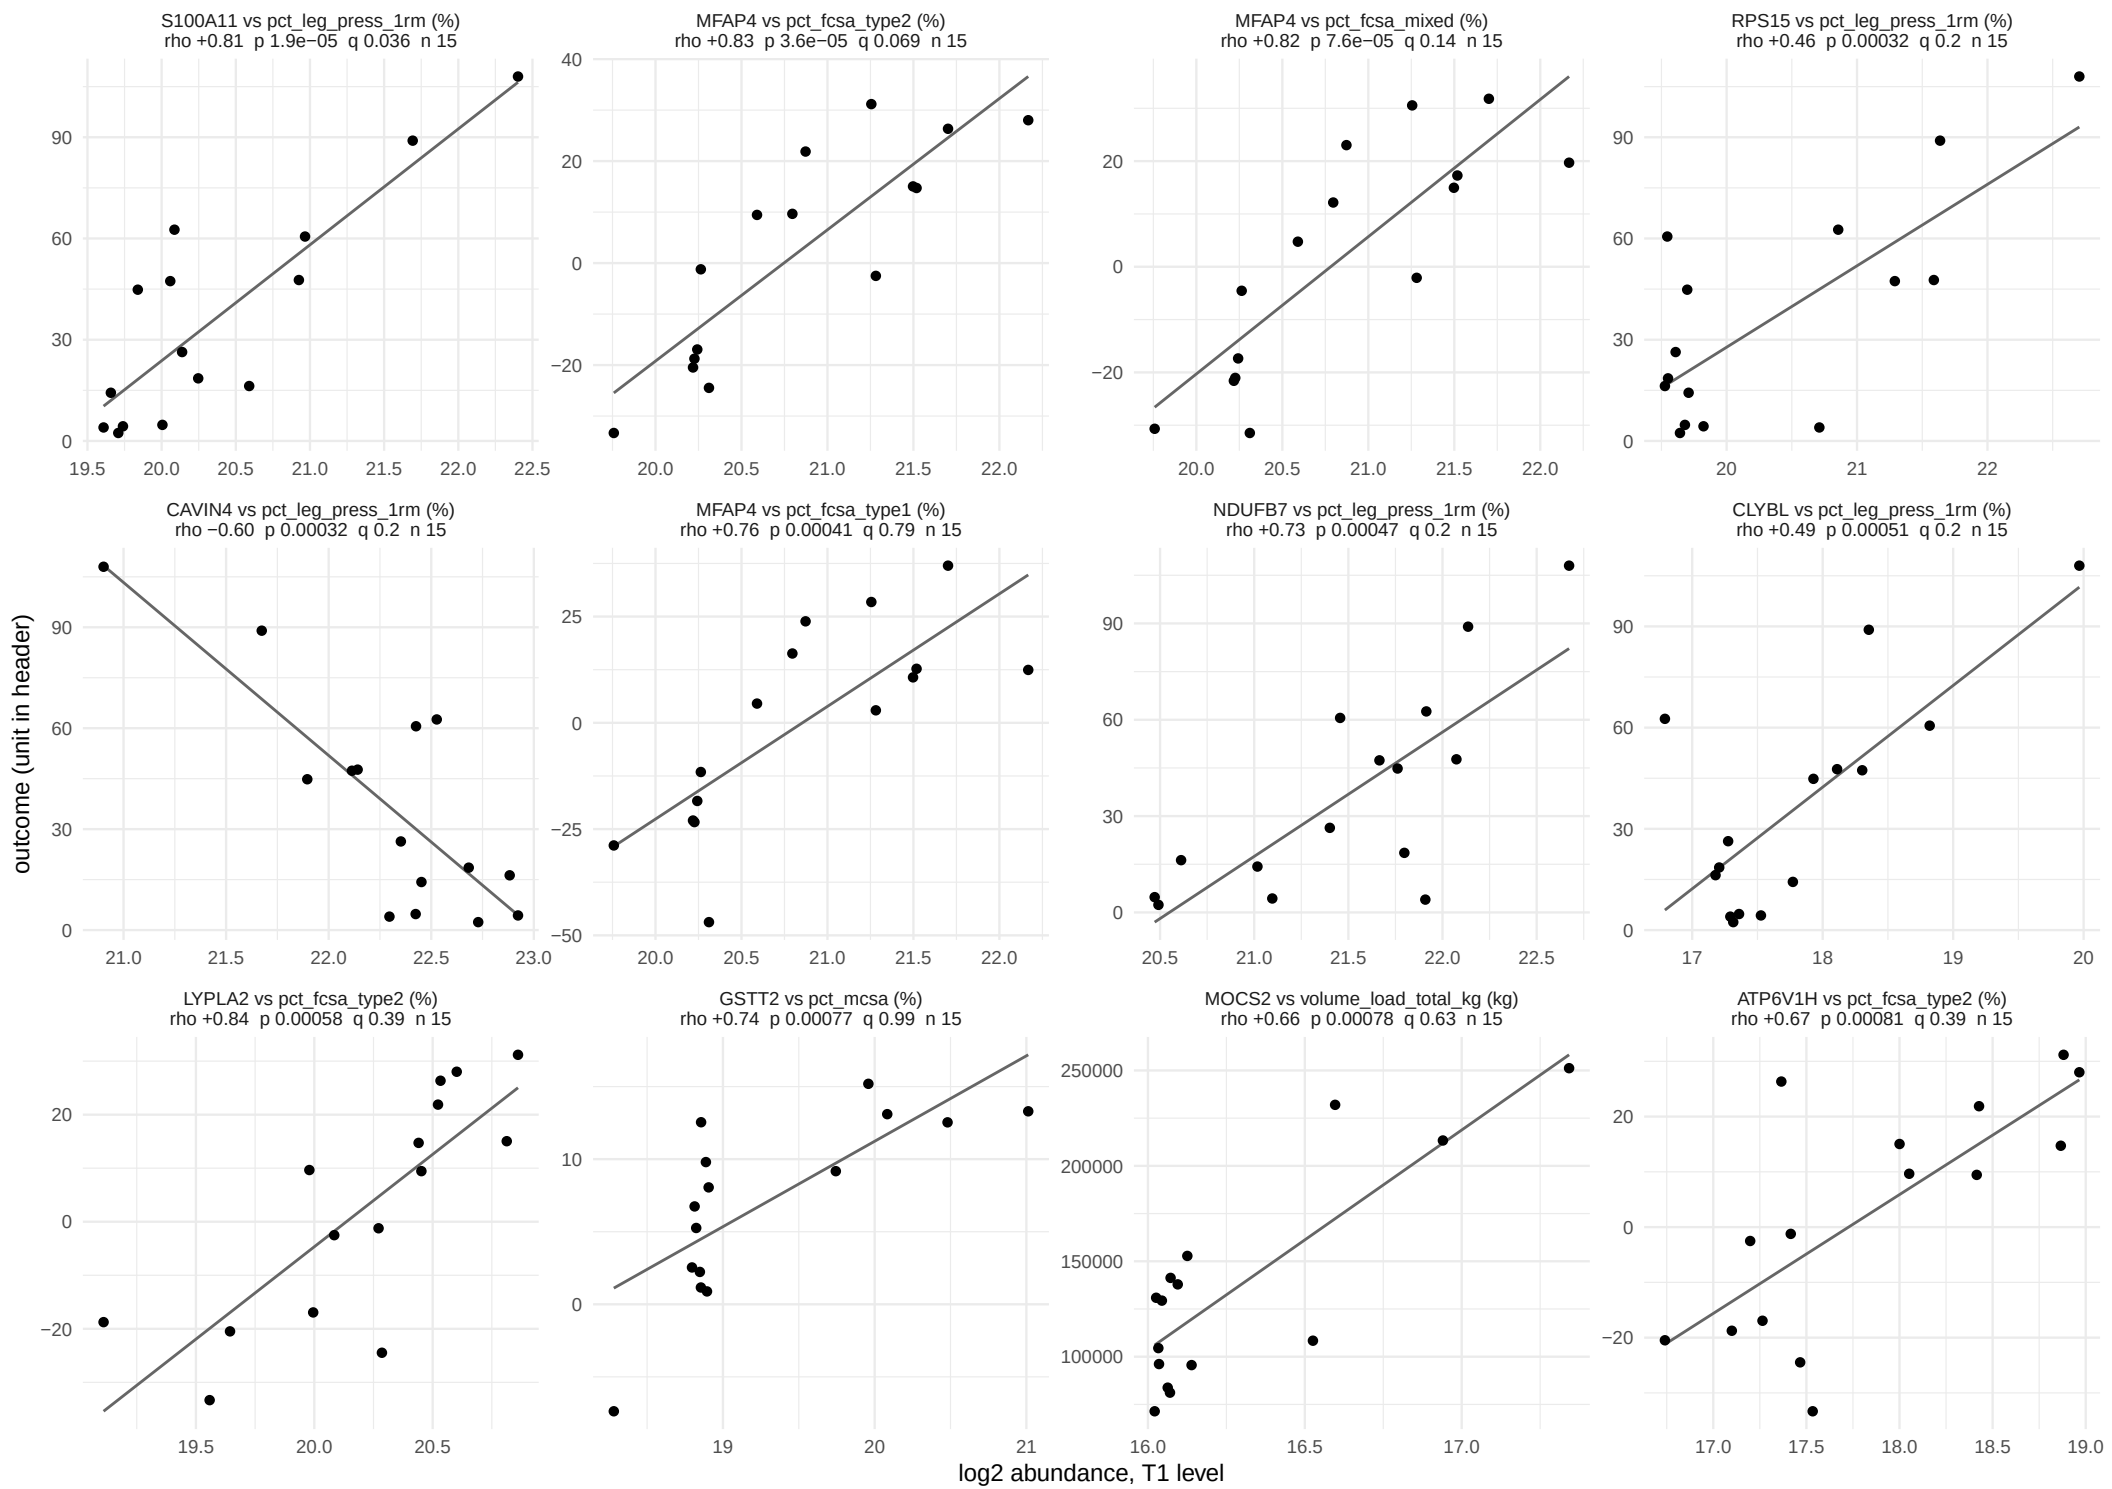

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline window


686 of 15200 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 2 of 58.

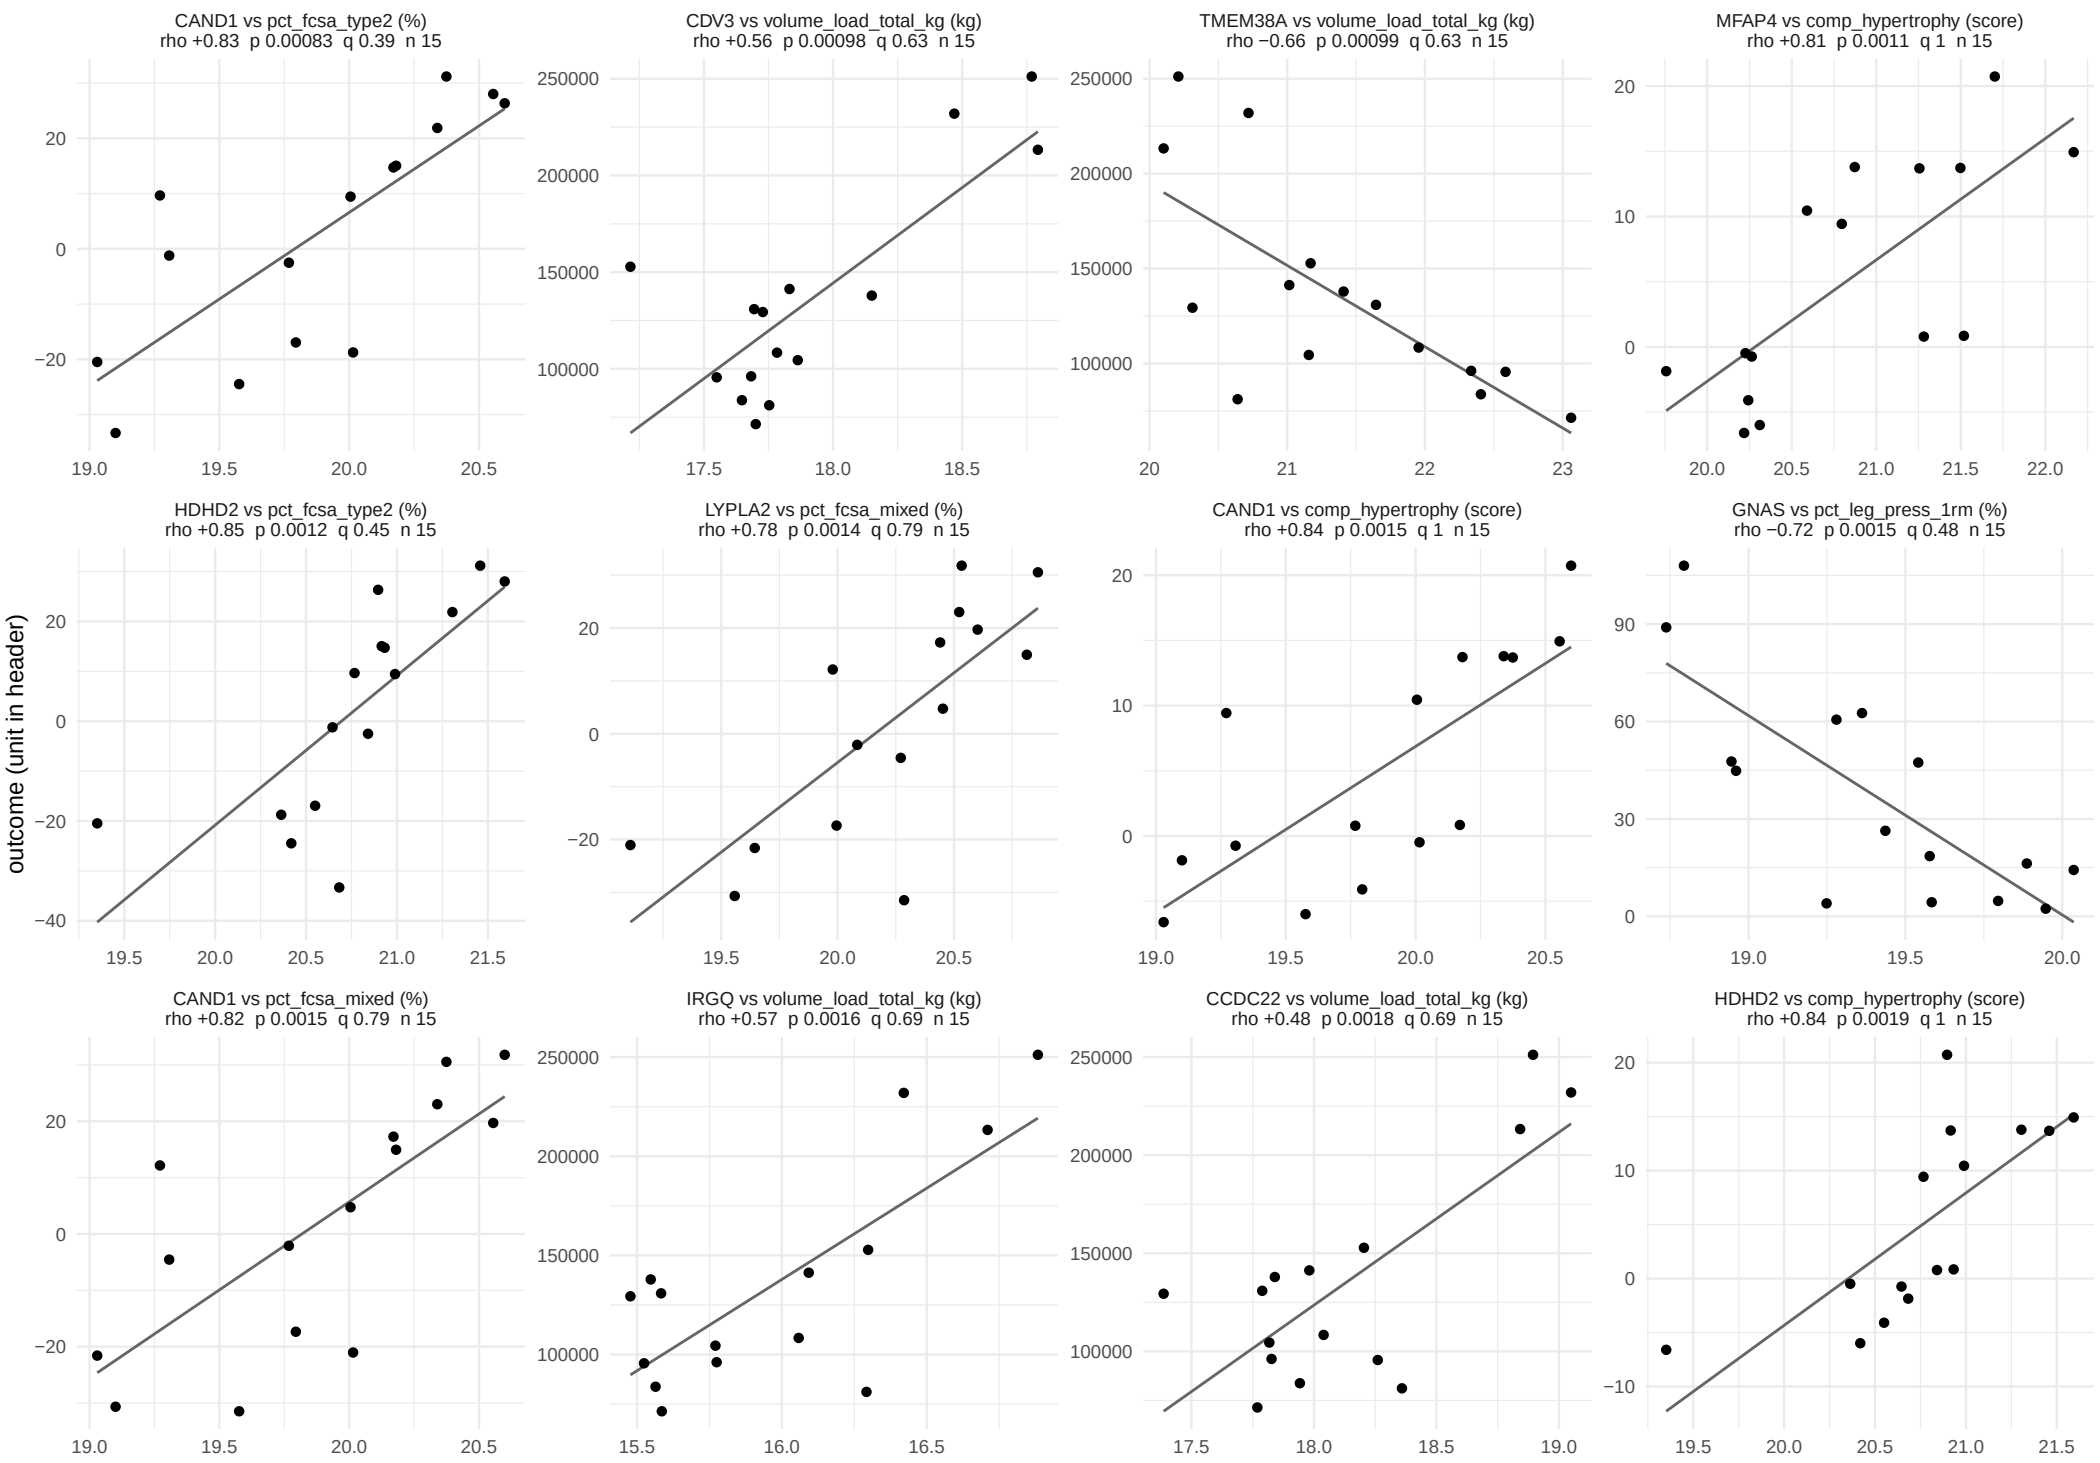

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline window


686 of 15200 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 3 of 58.

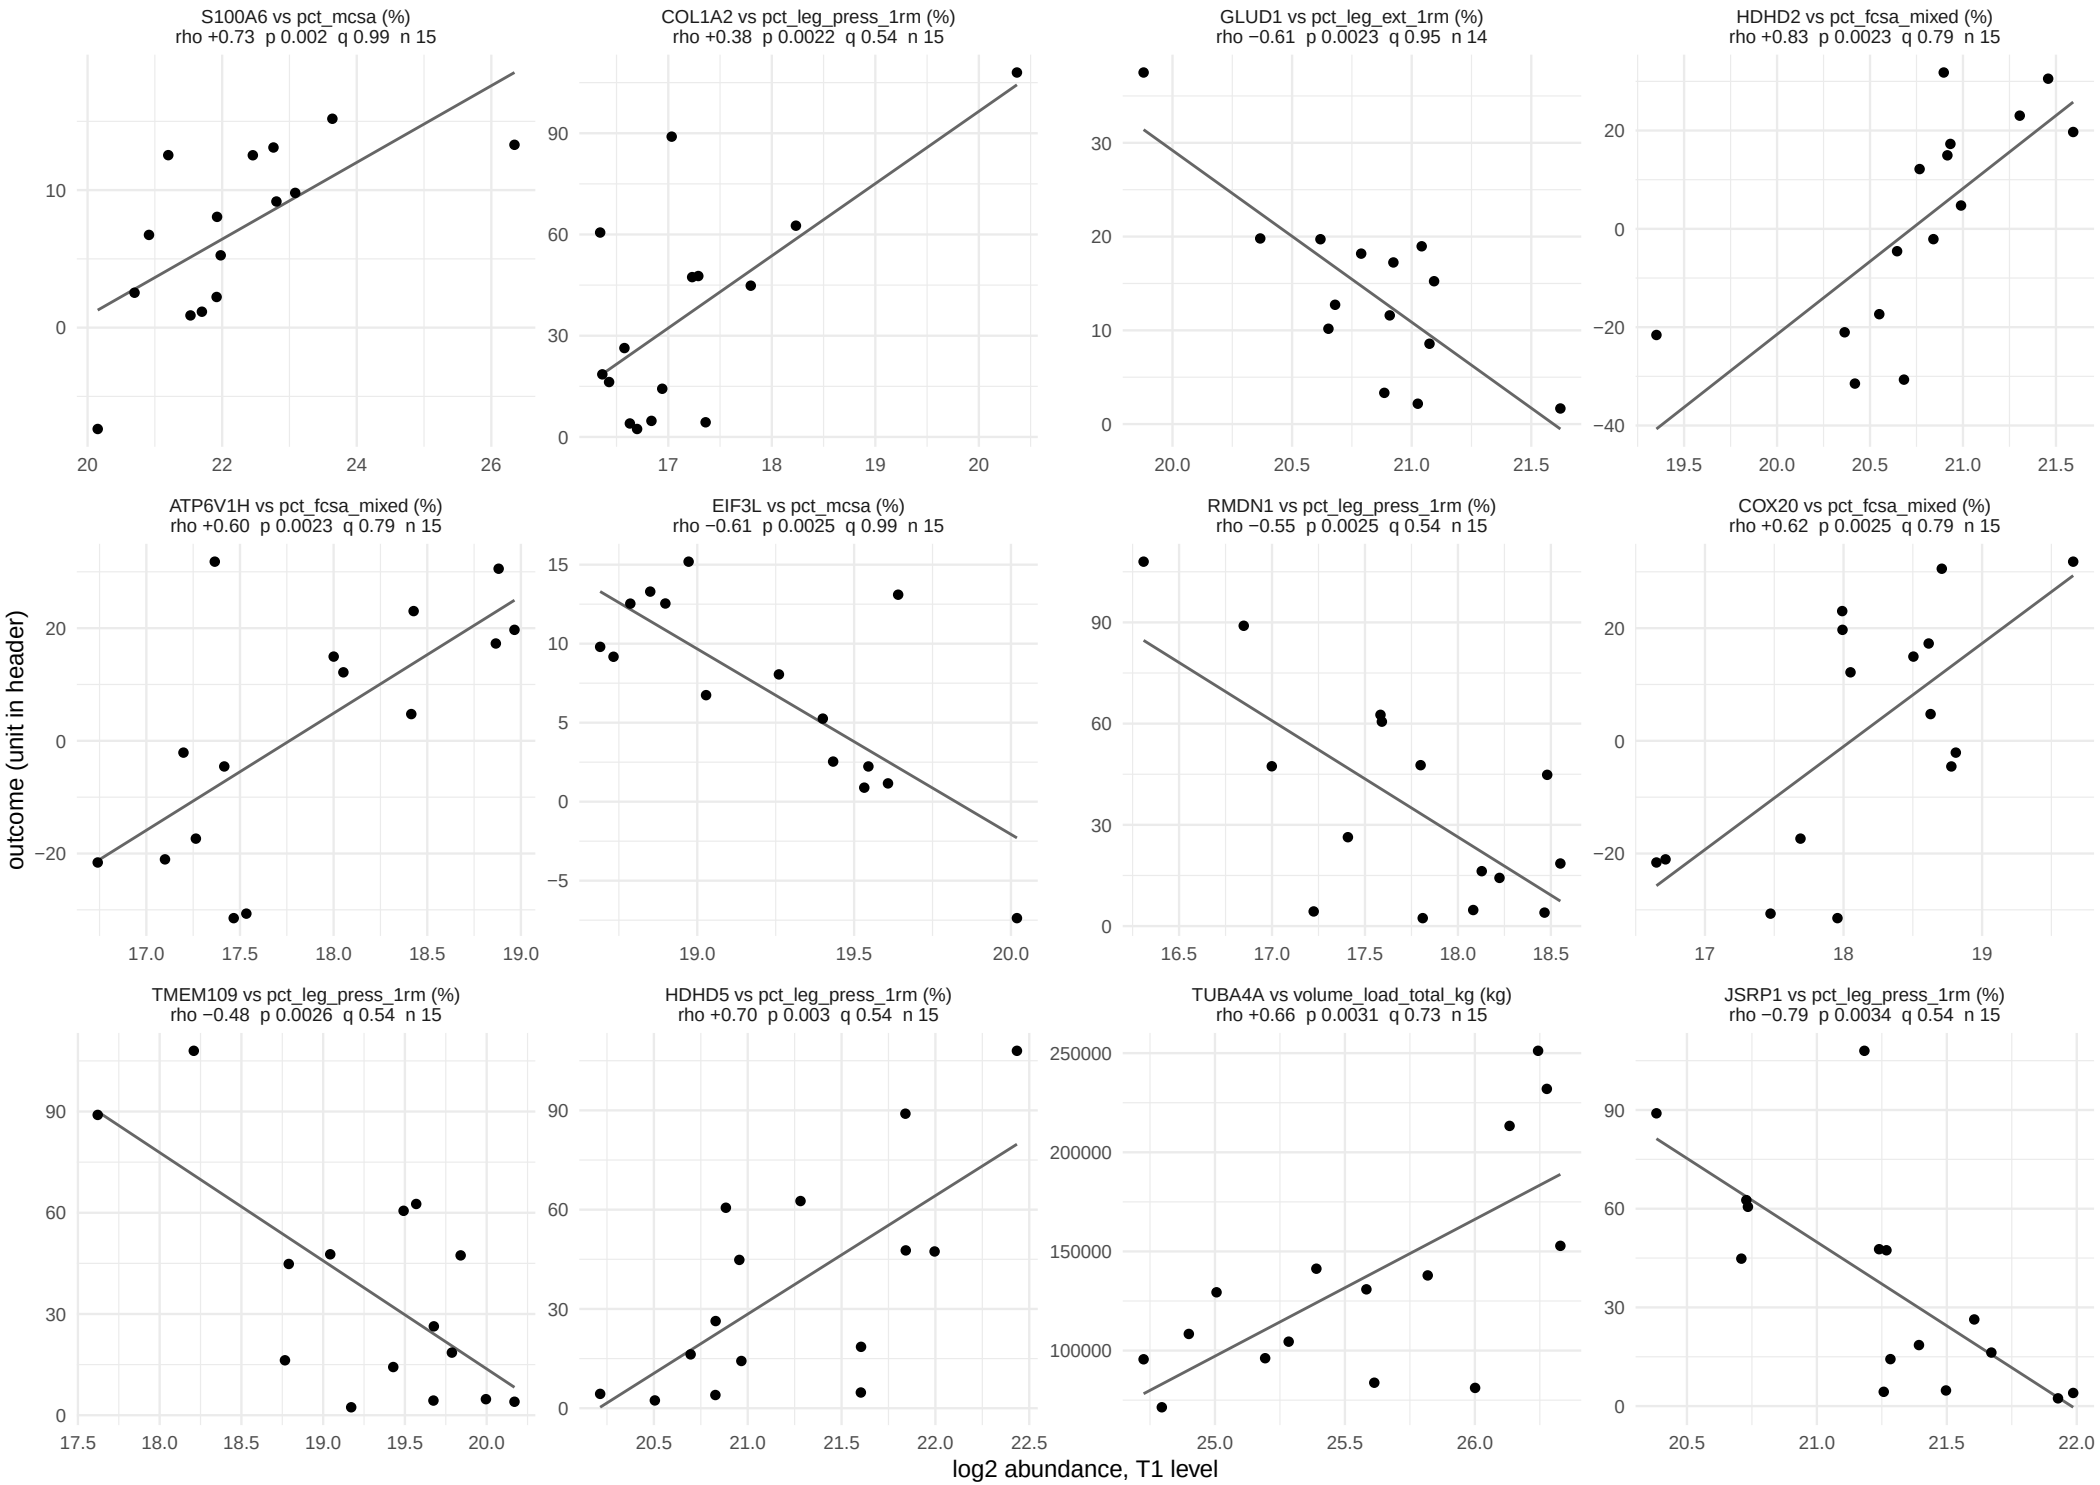

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline window


686 of 15200 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 4 of 58.

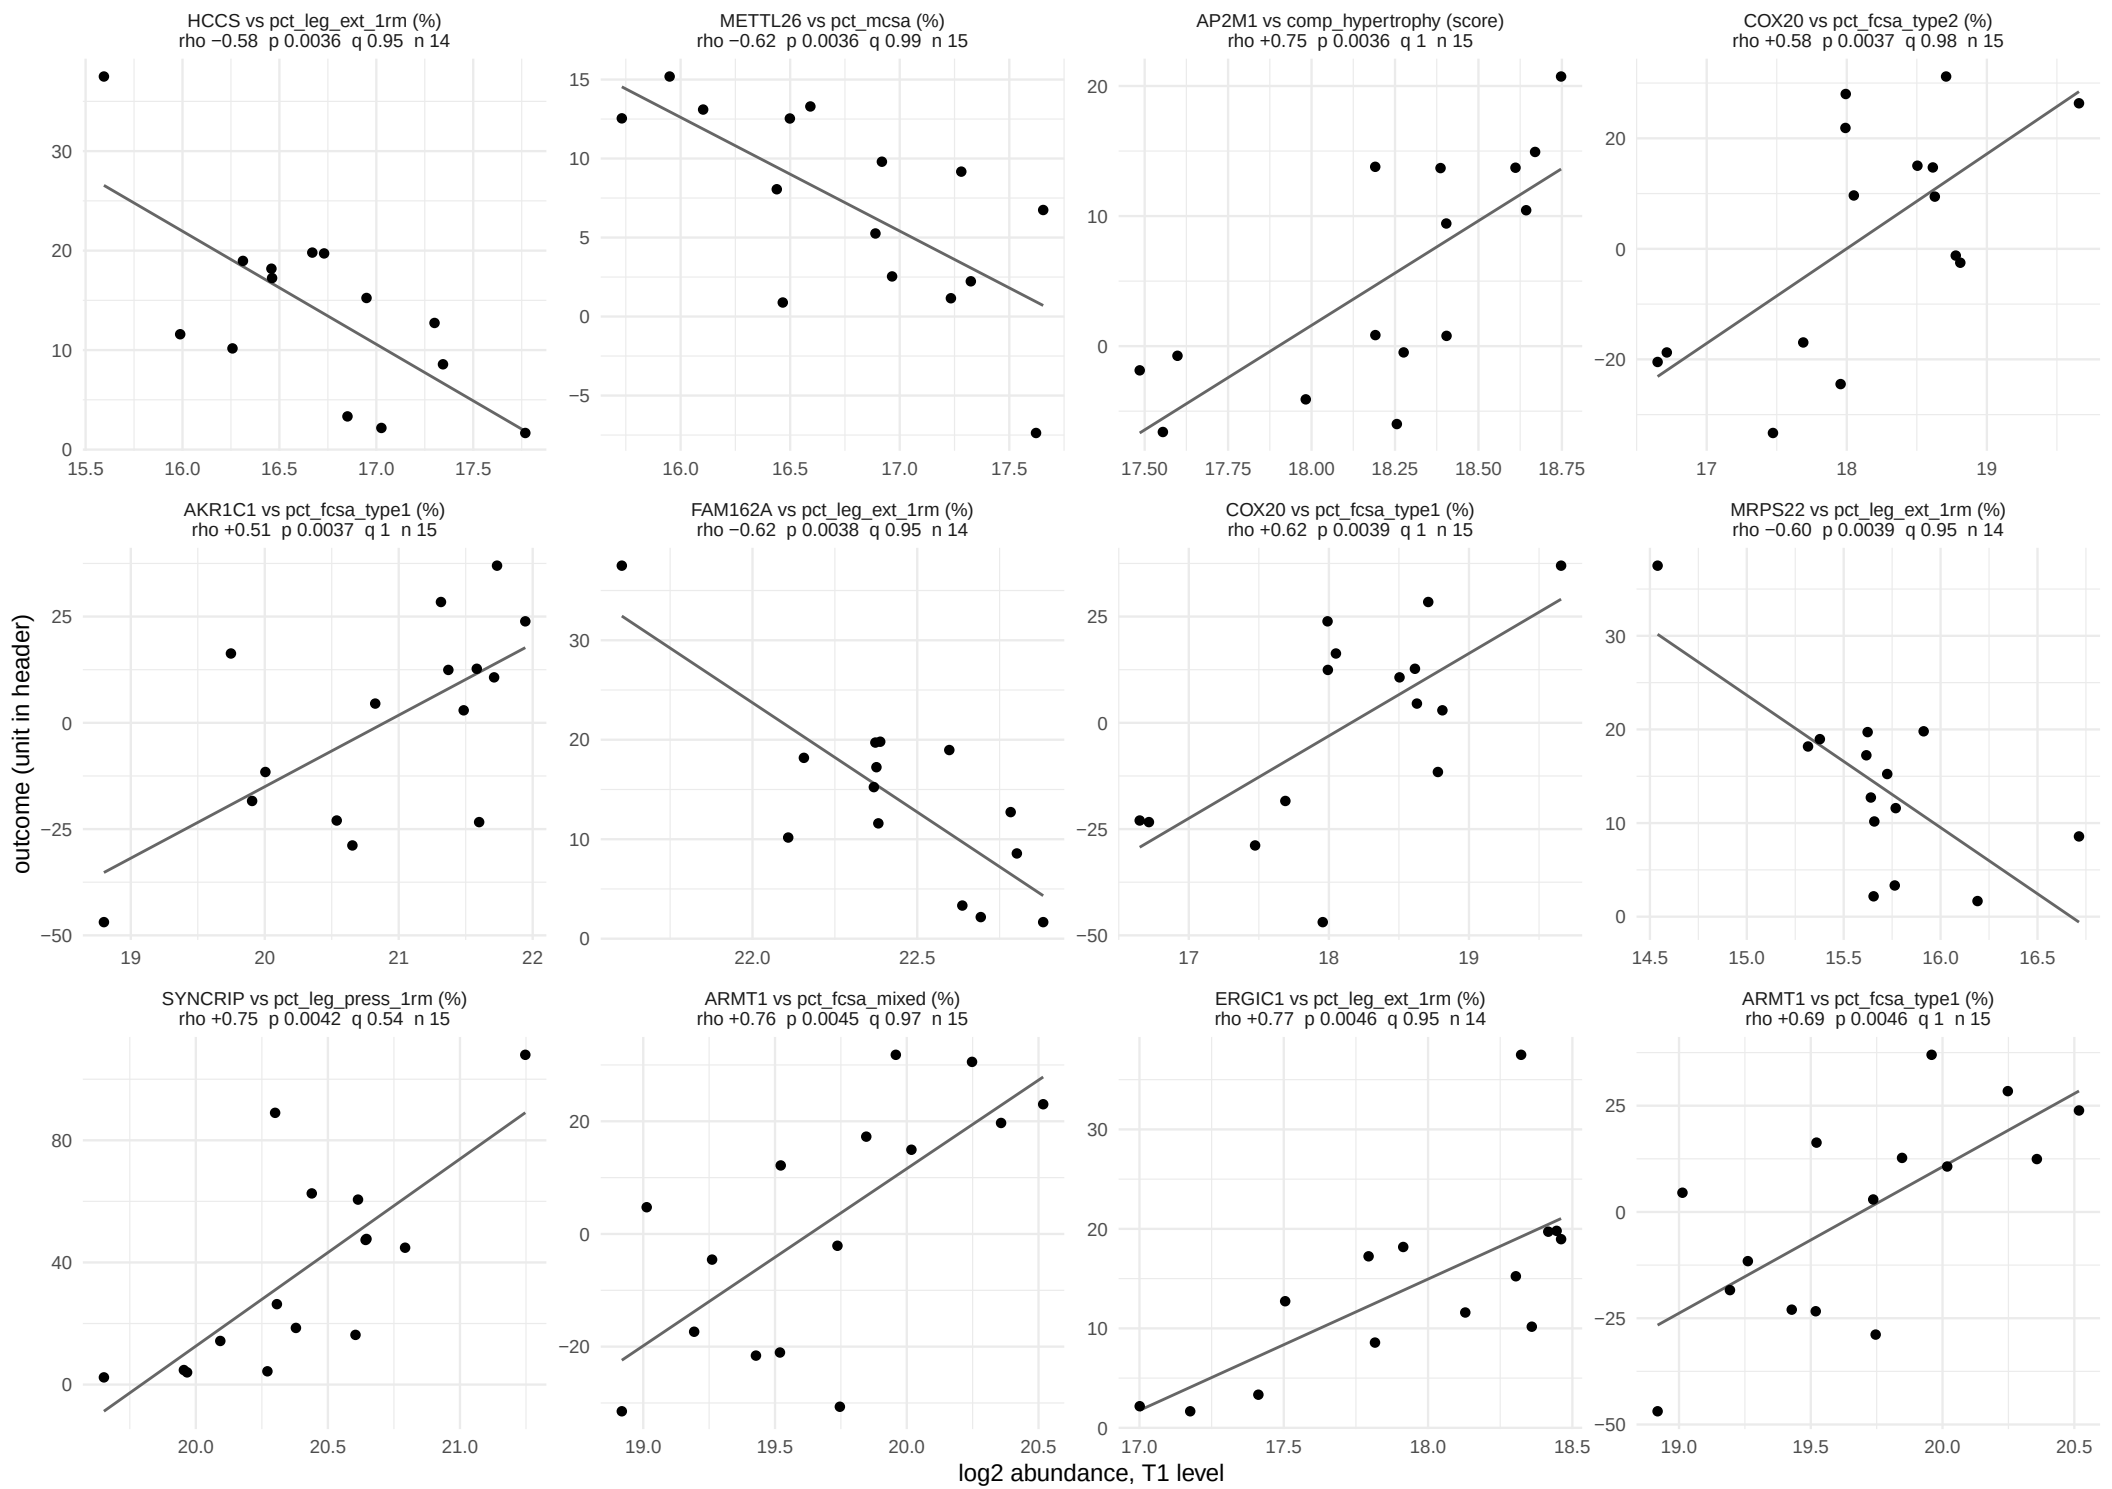

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline window


686 of 15200 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 5 of 58.

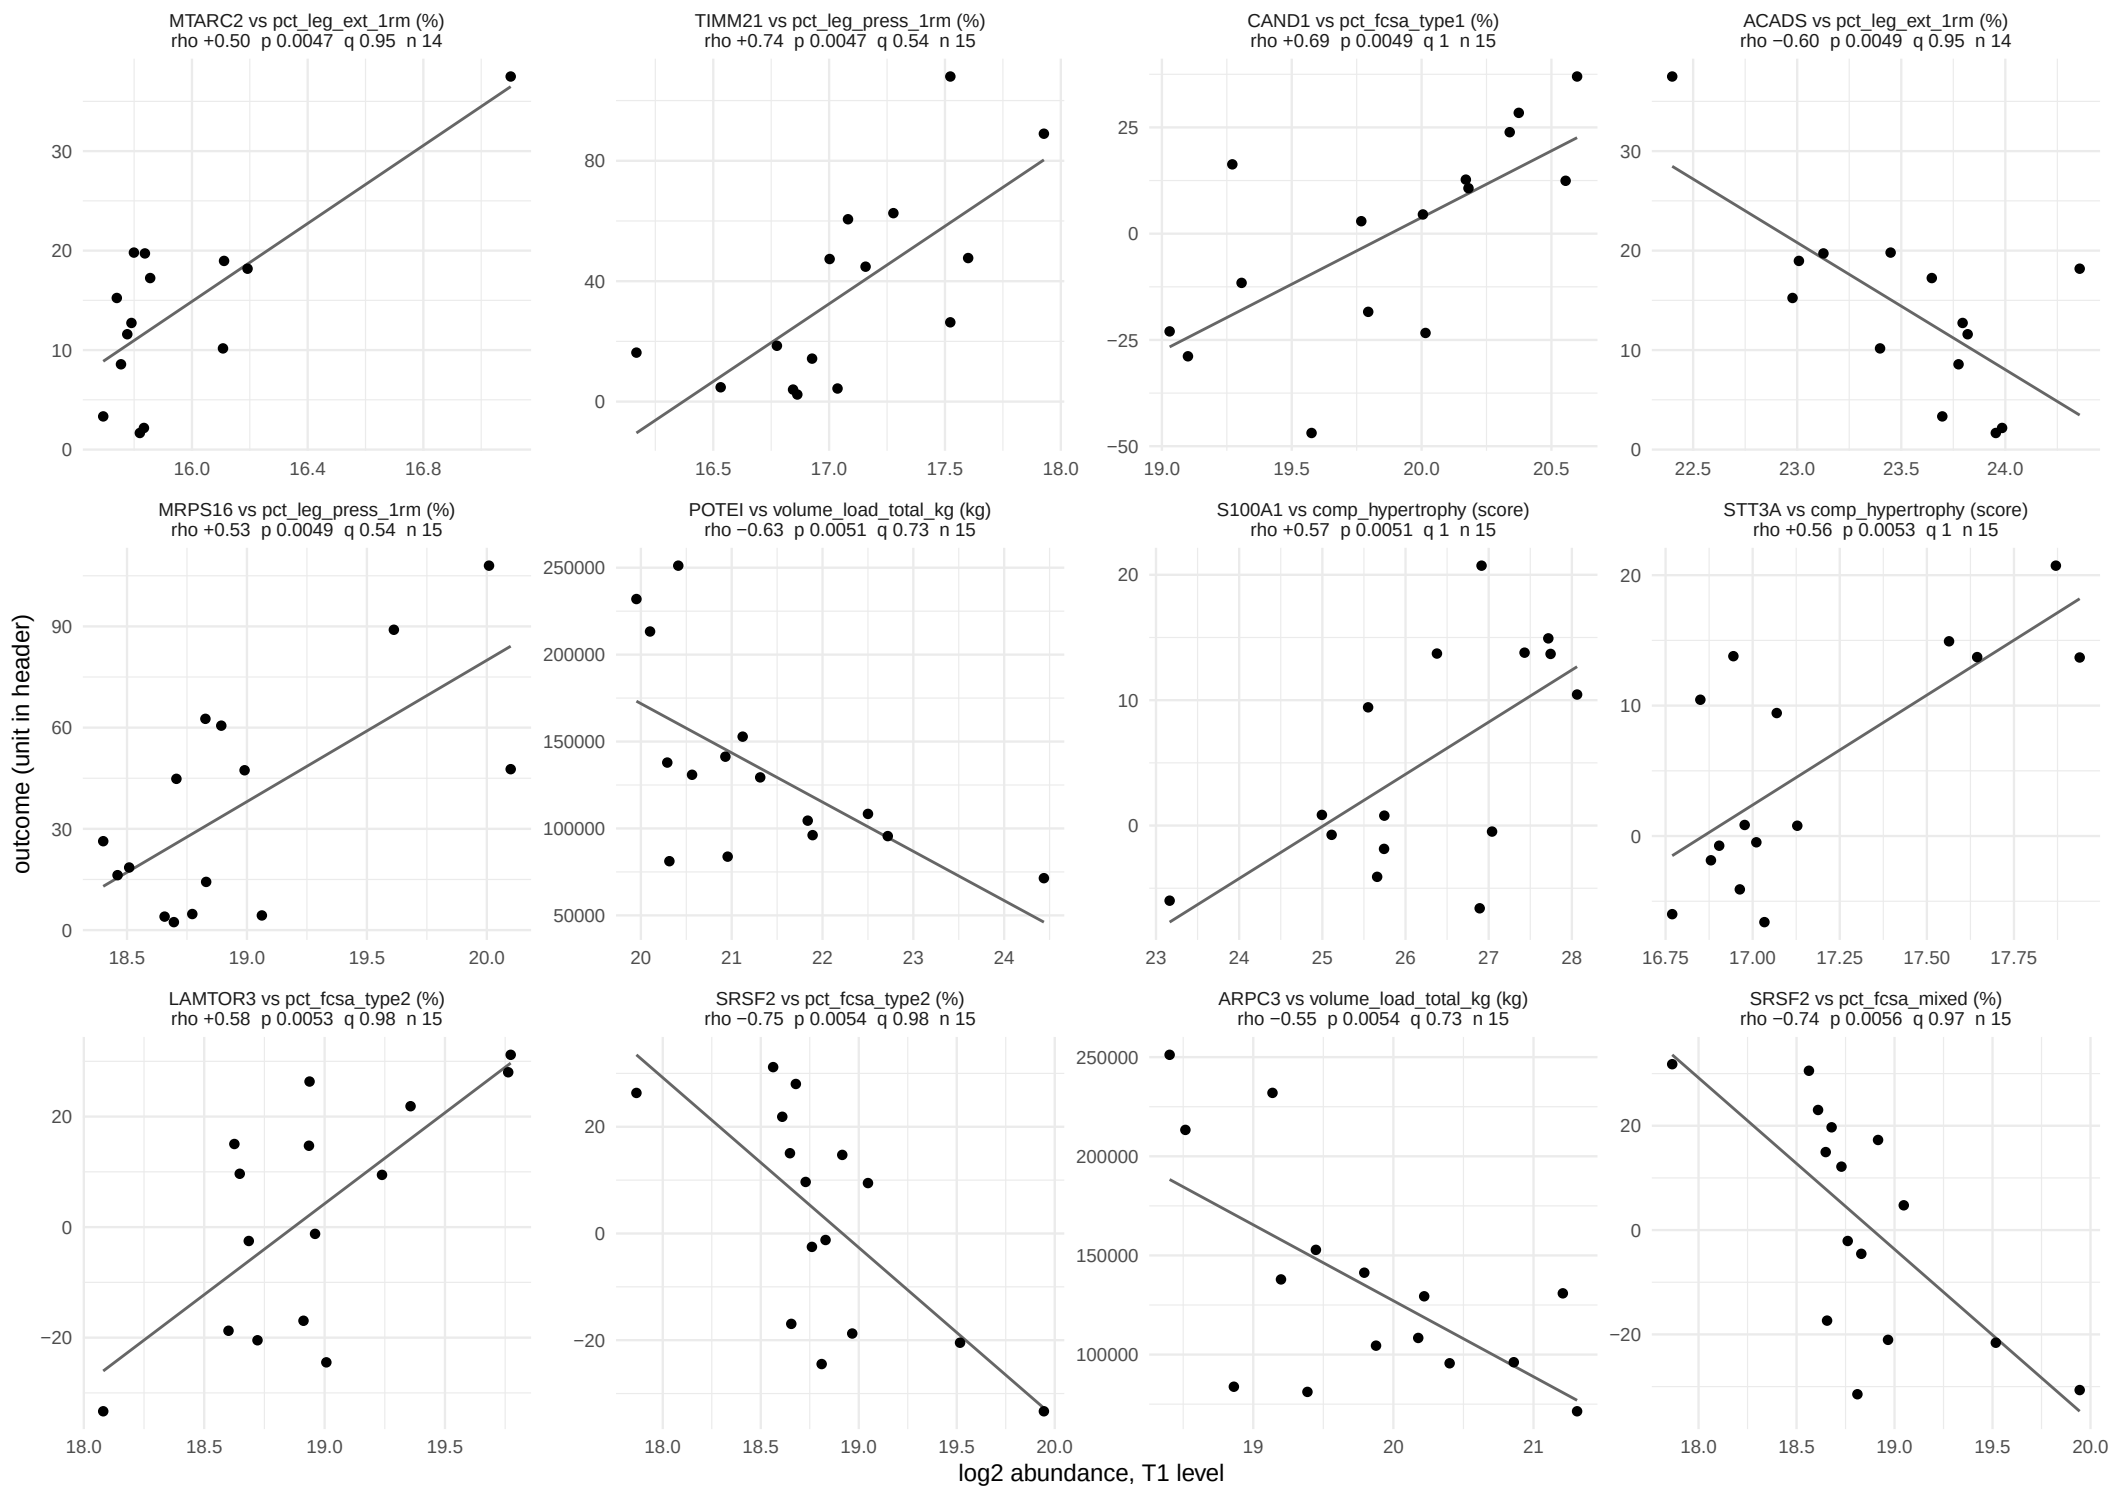

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline window


686 of 15200 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 6 of 58.

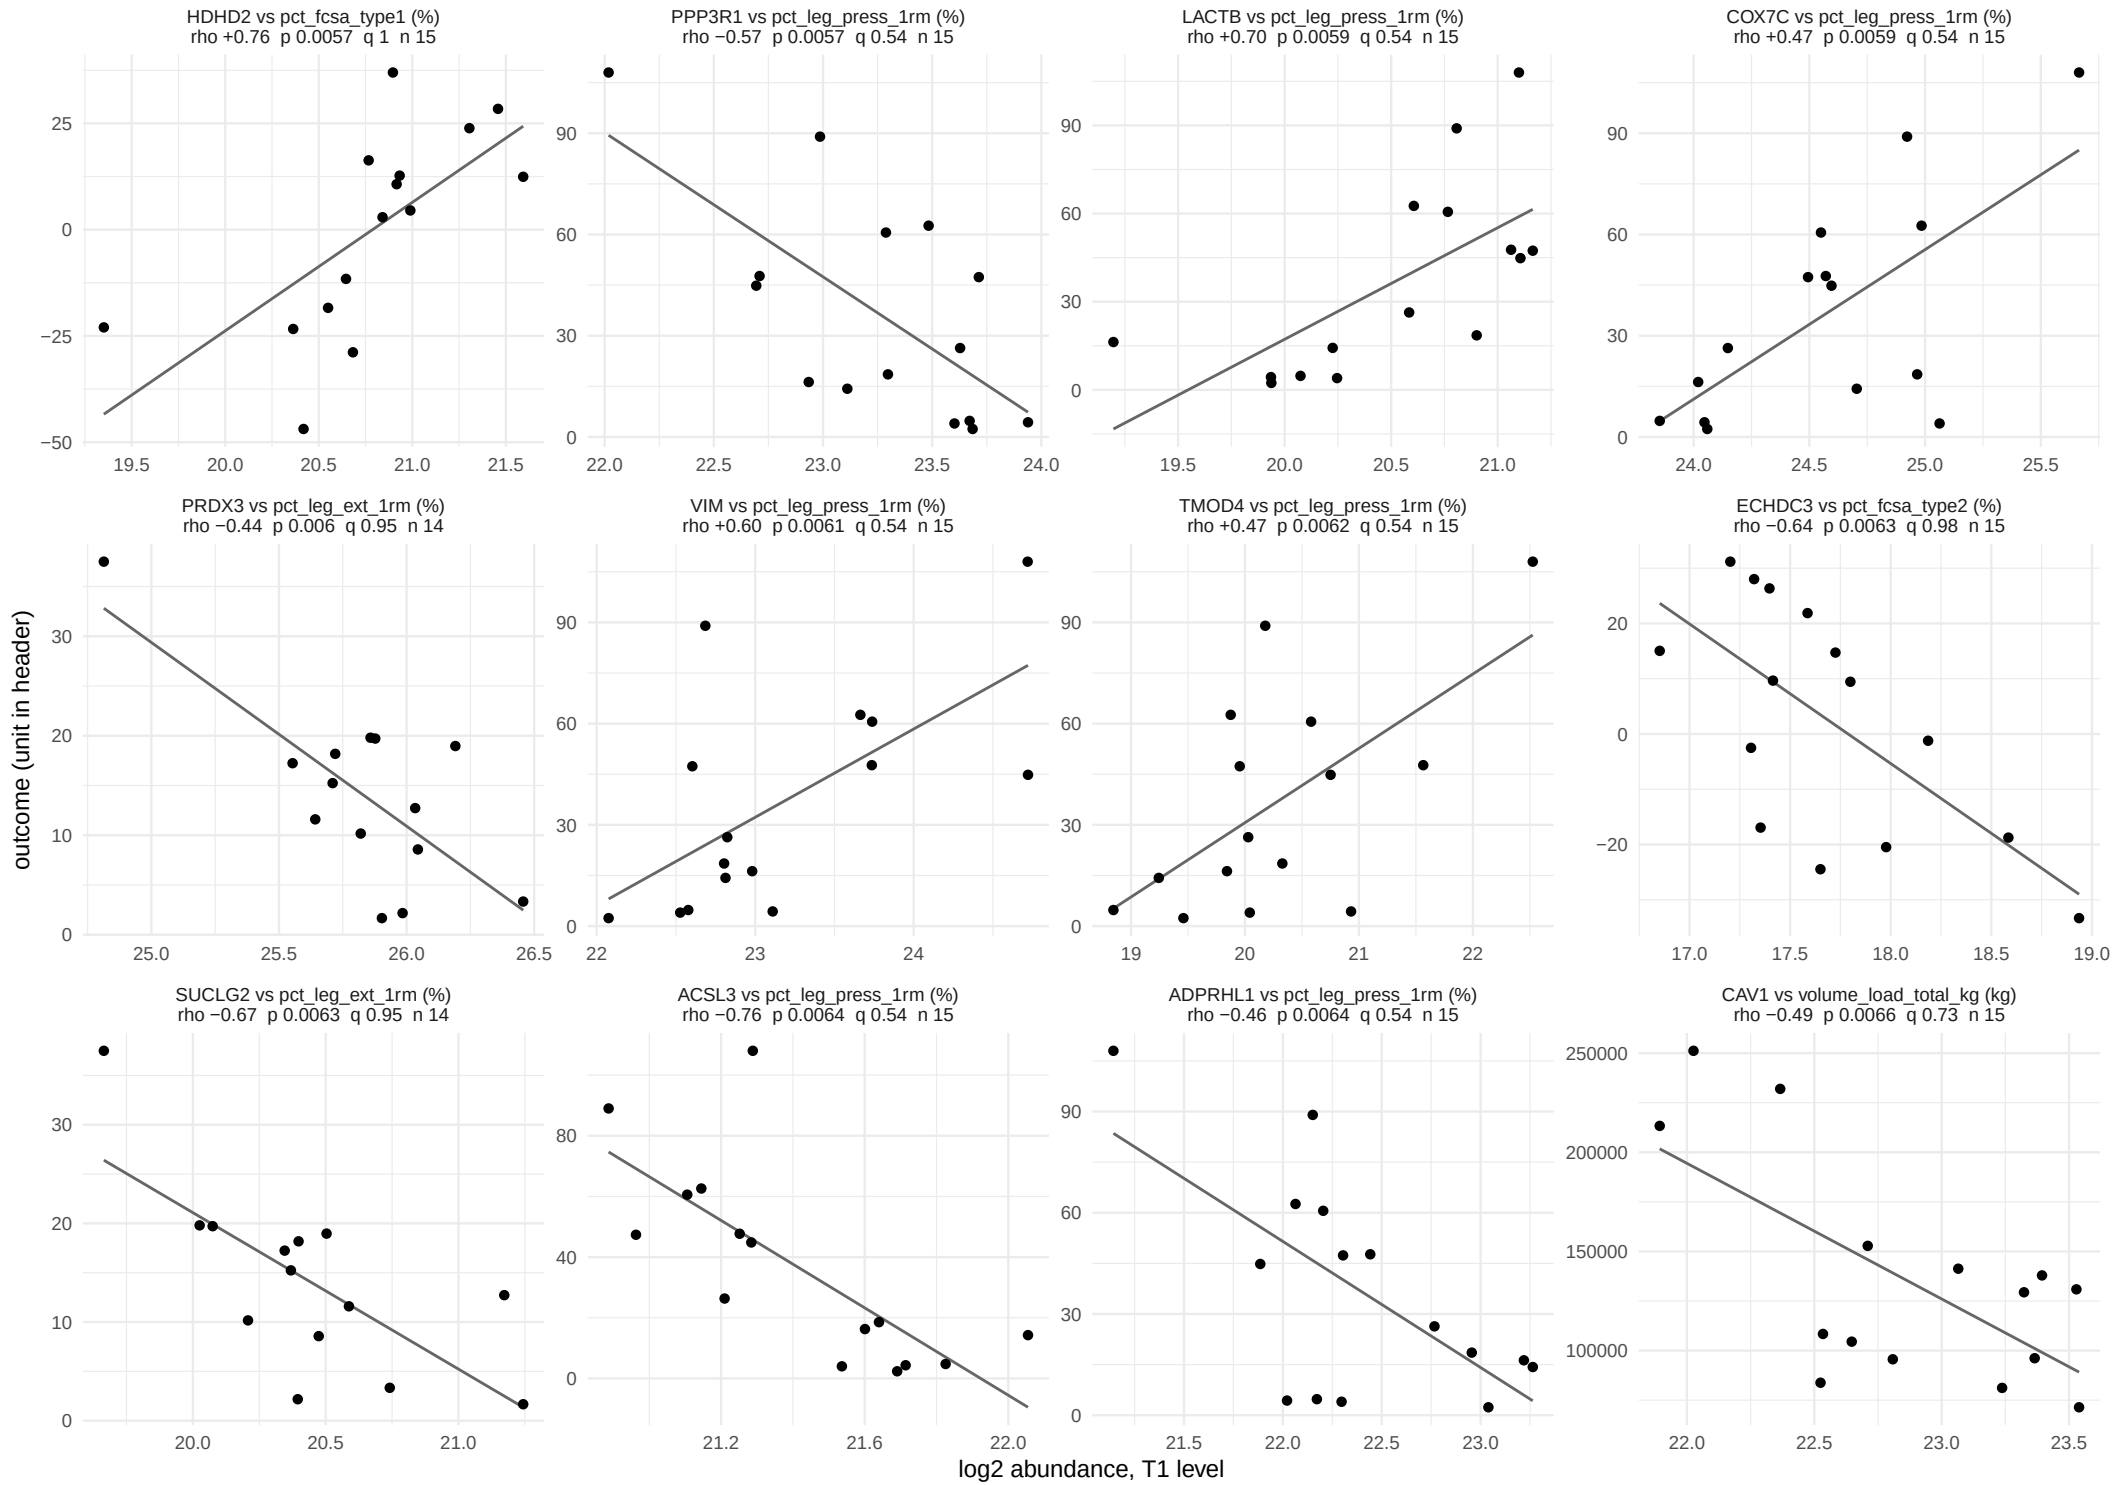

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline window


686 of 15200 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 7 of 58.

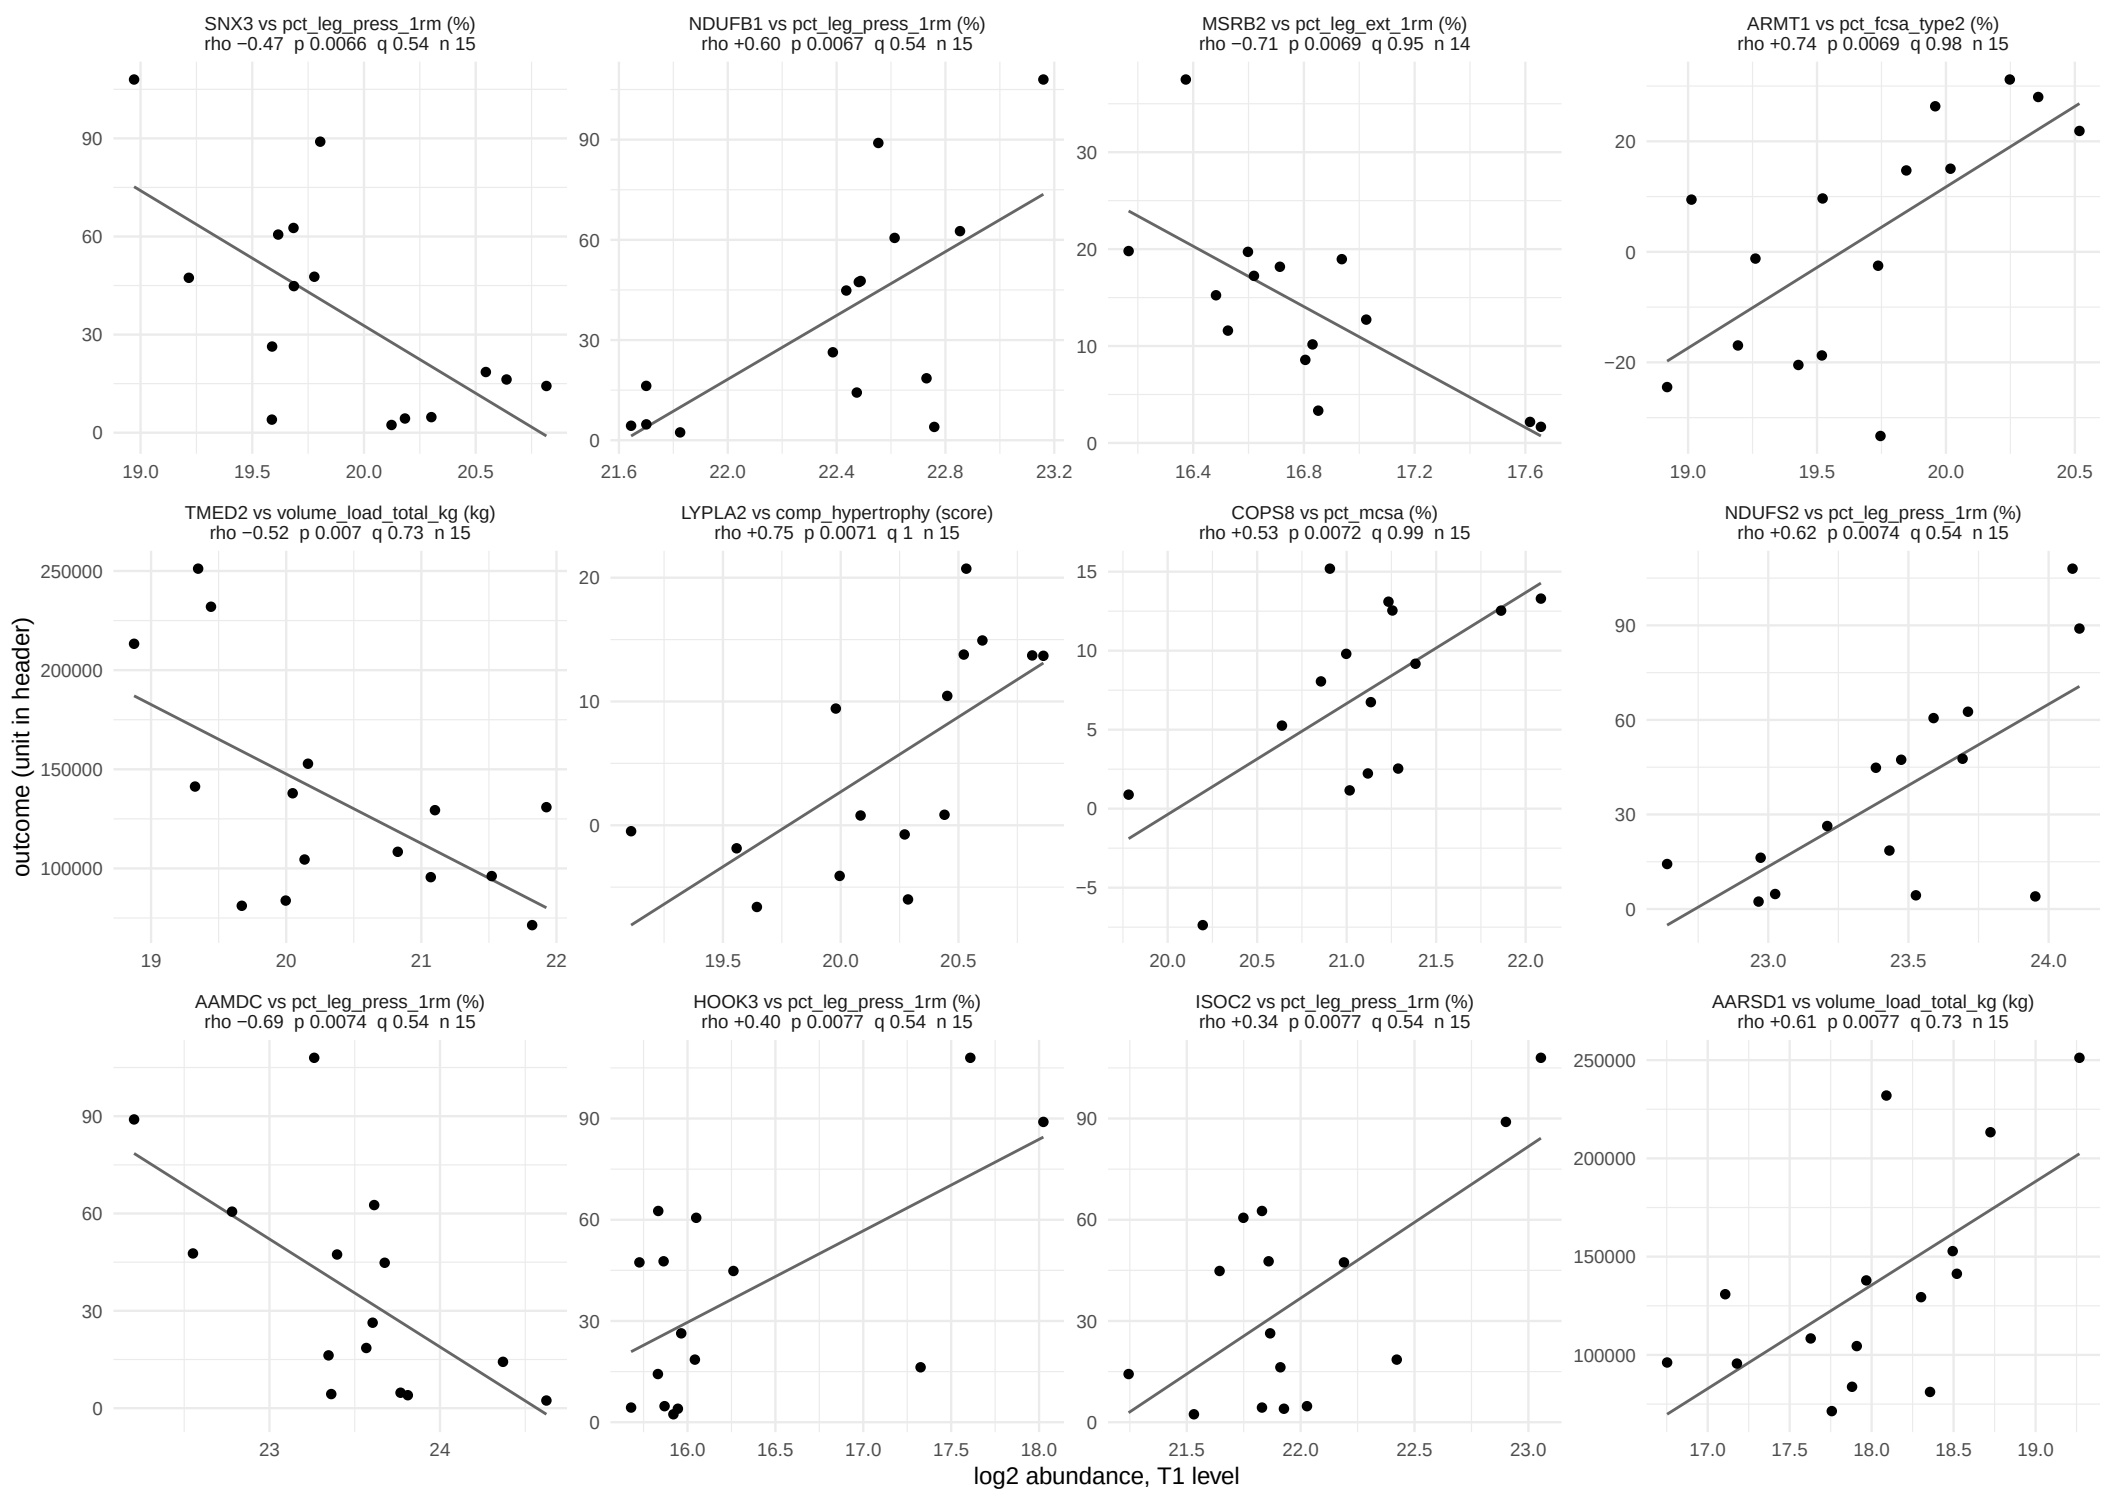

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline window


686 of 15200 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 8 of 58.

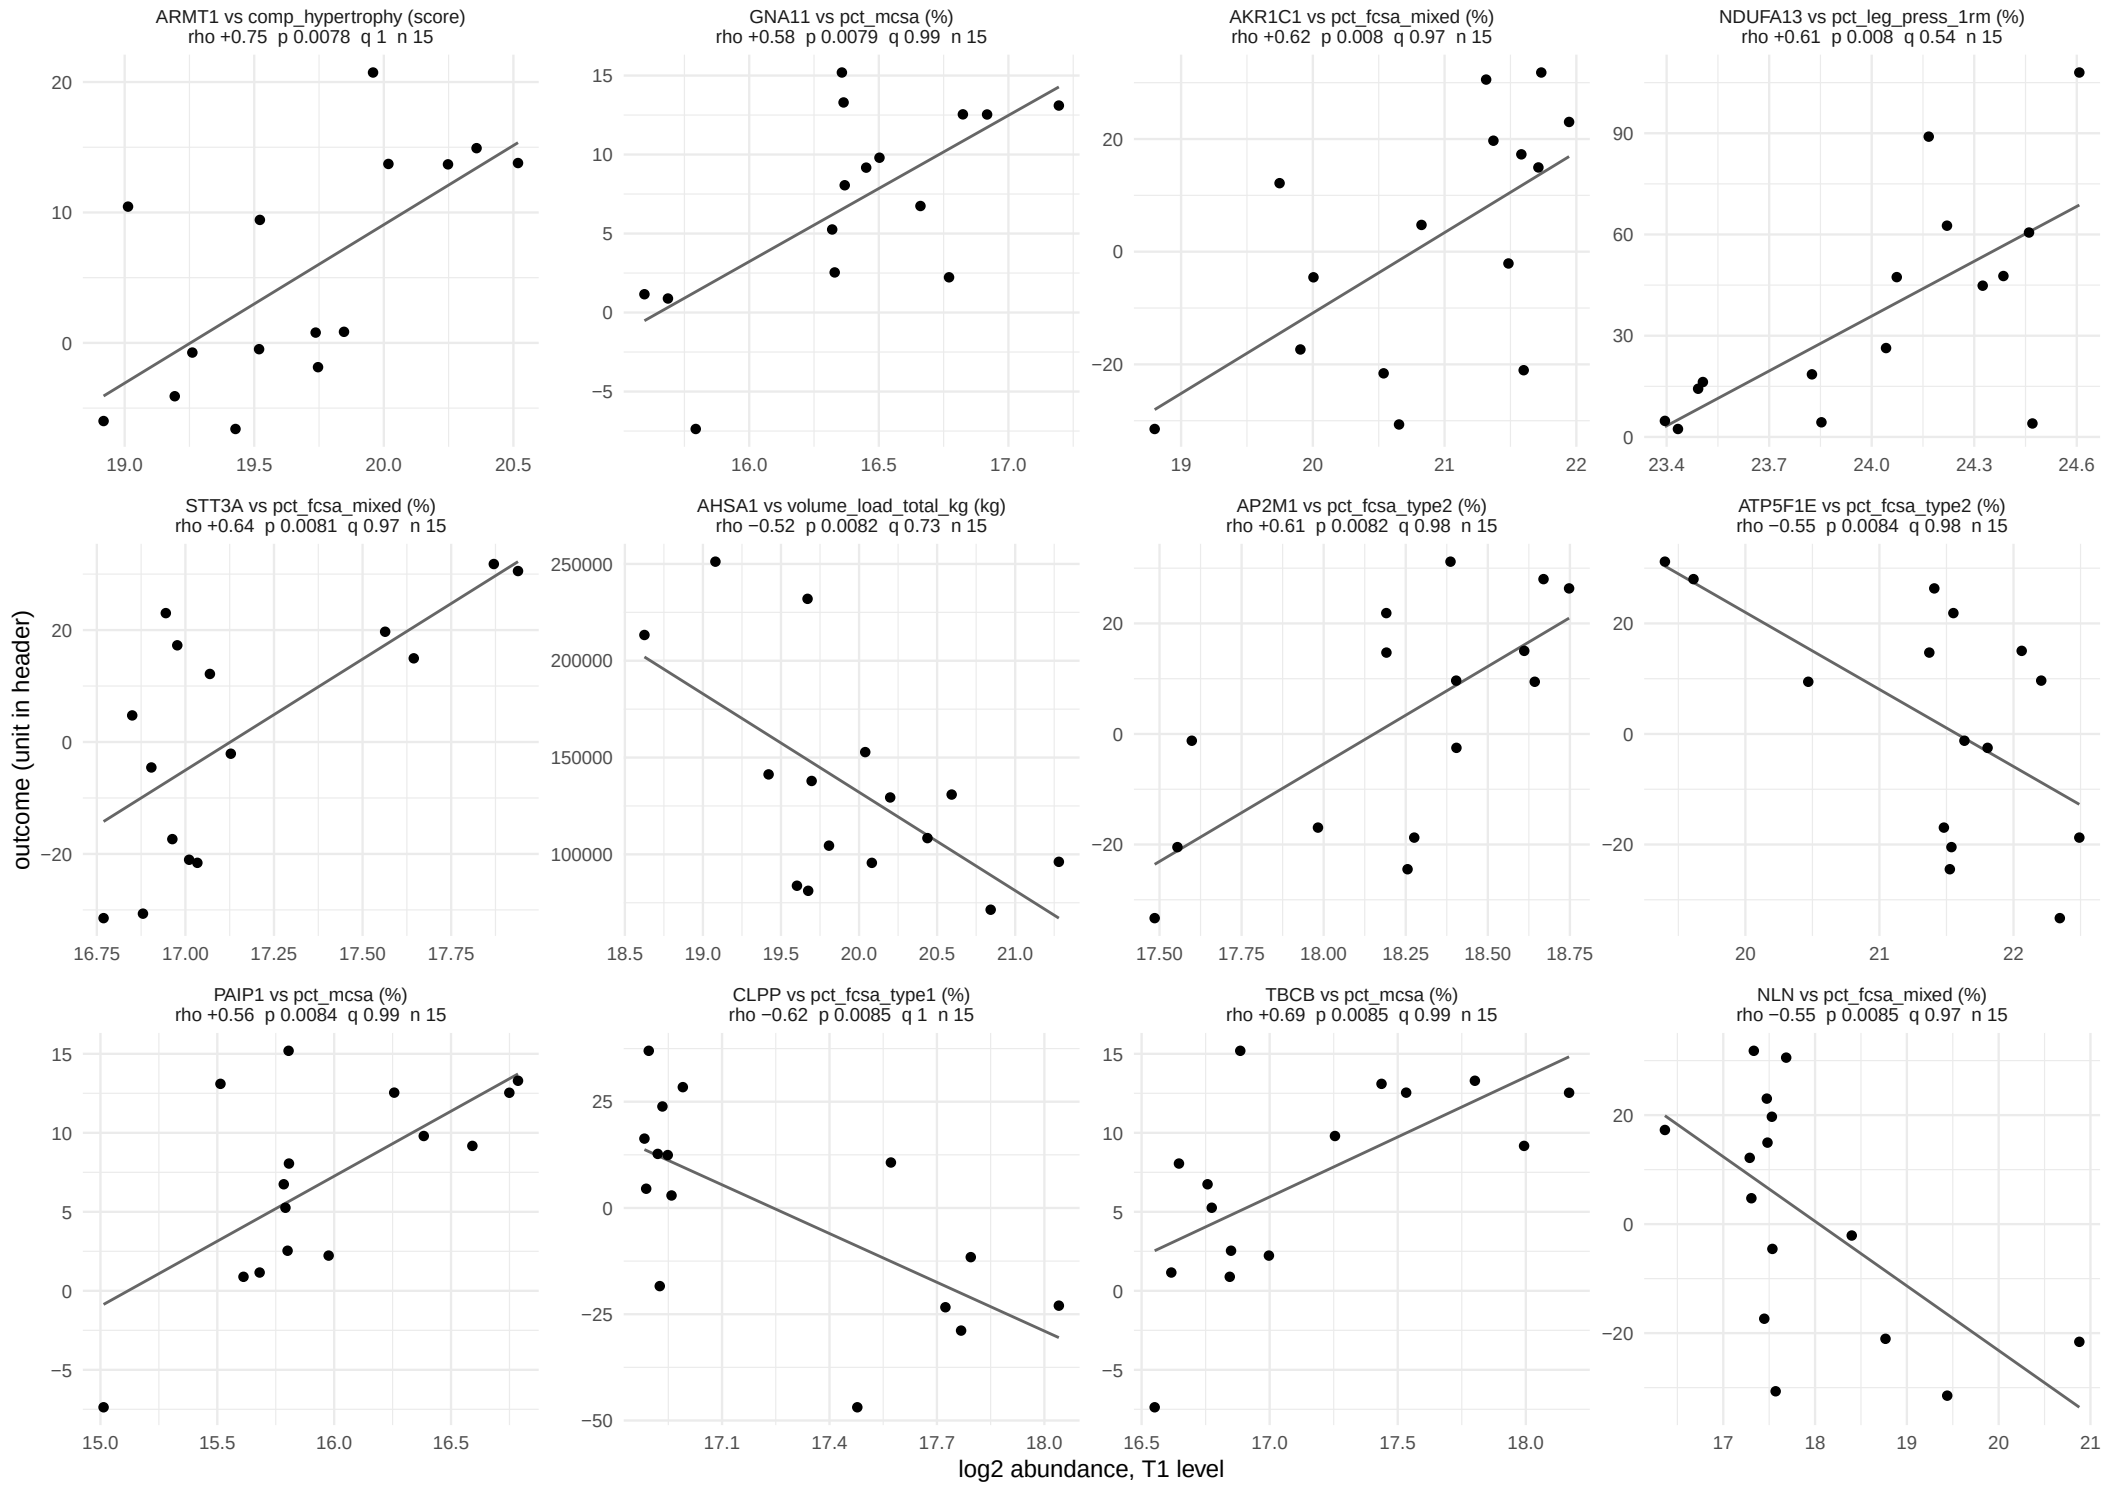

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline window


686 of 15200 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 9 of 58.

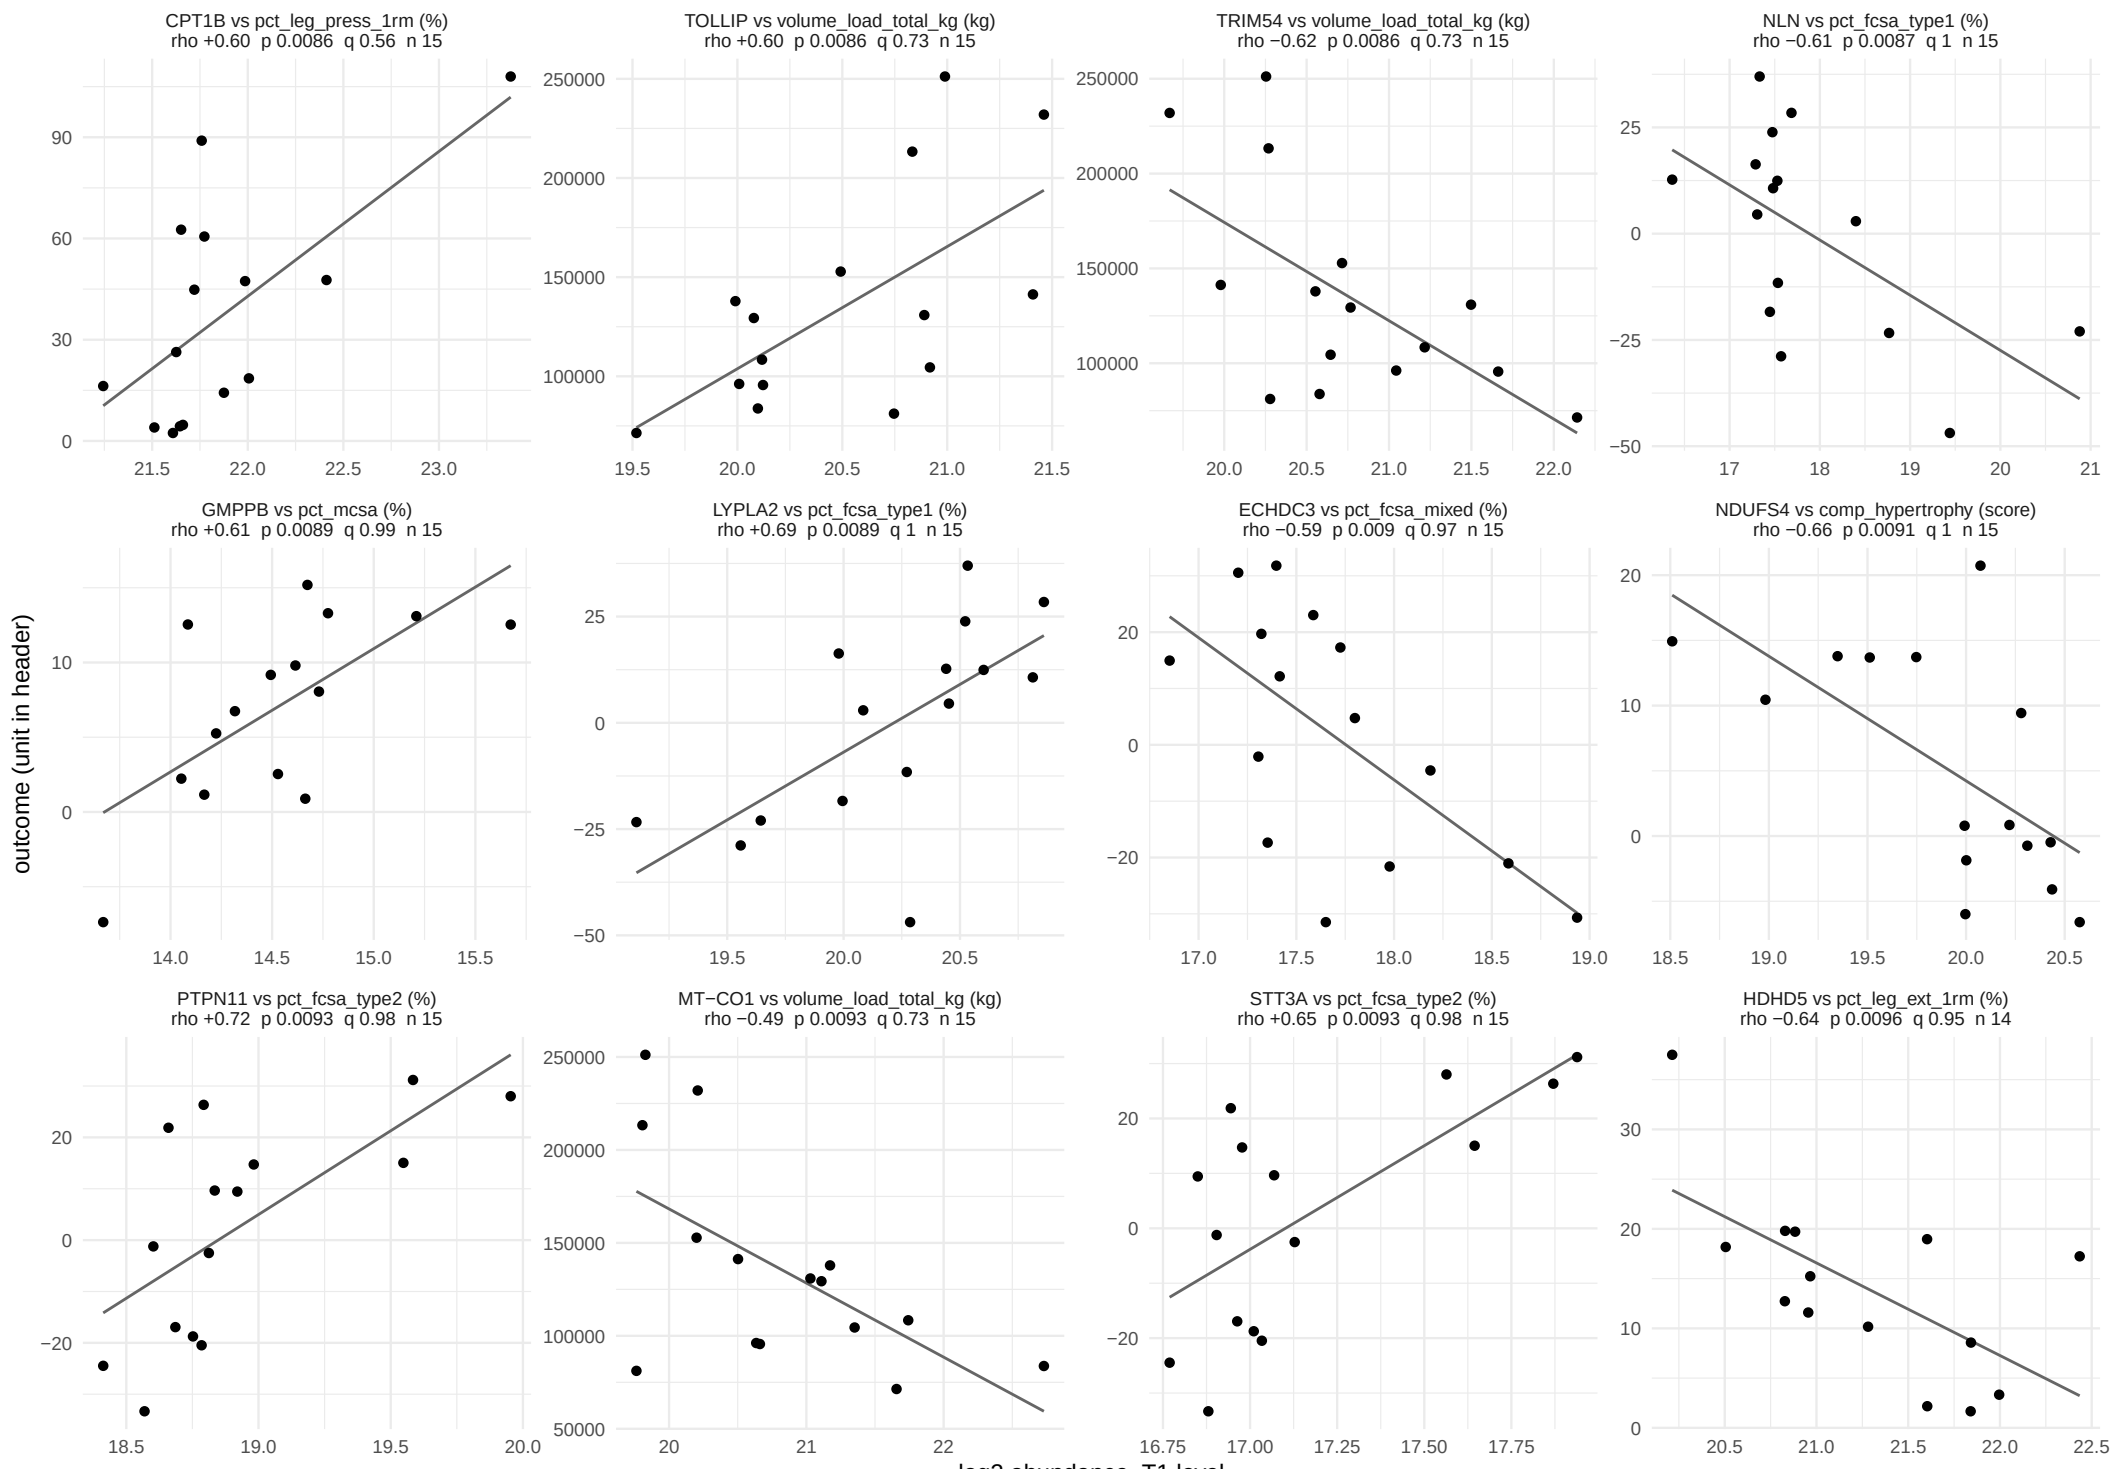

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline window


686 of 15200 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 10 of 58.

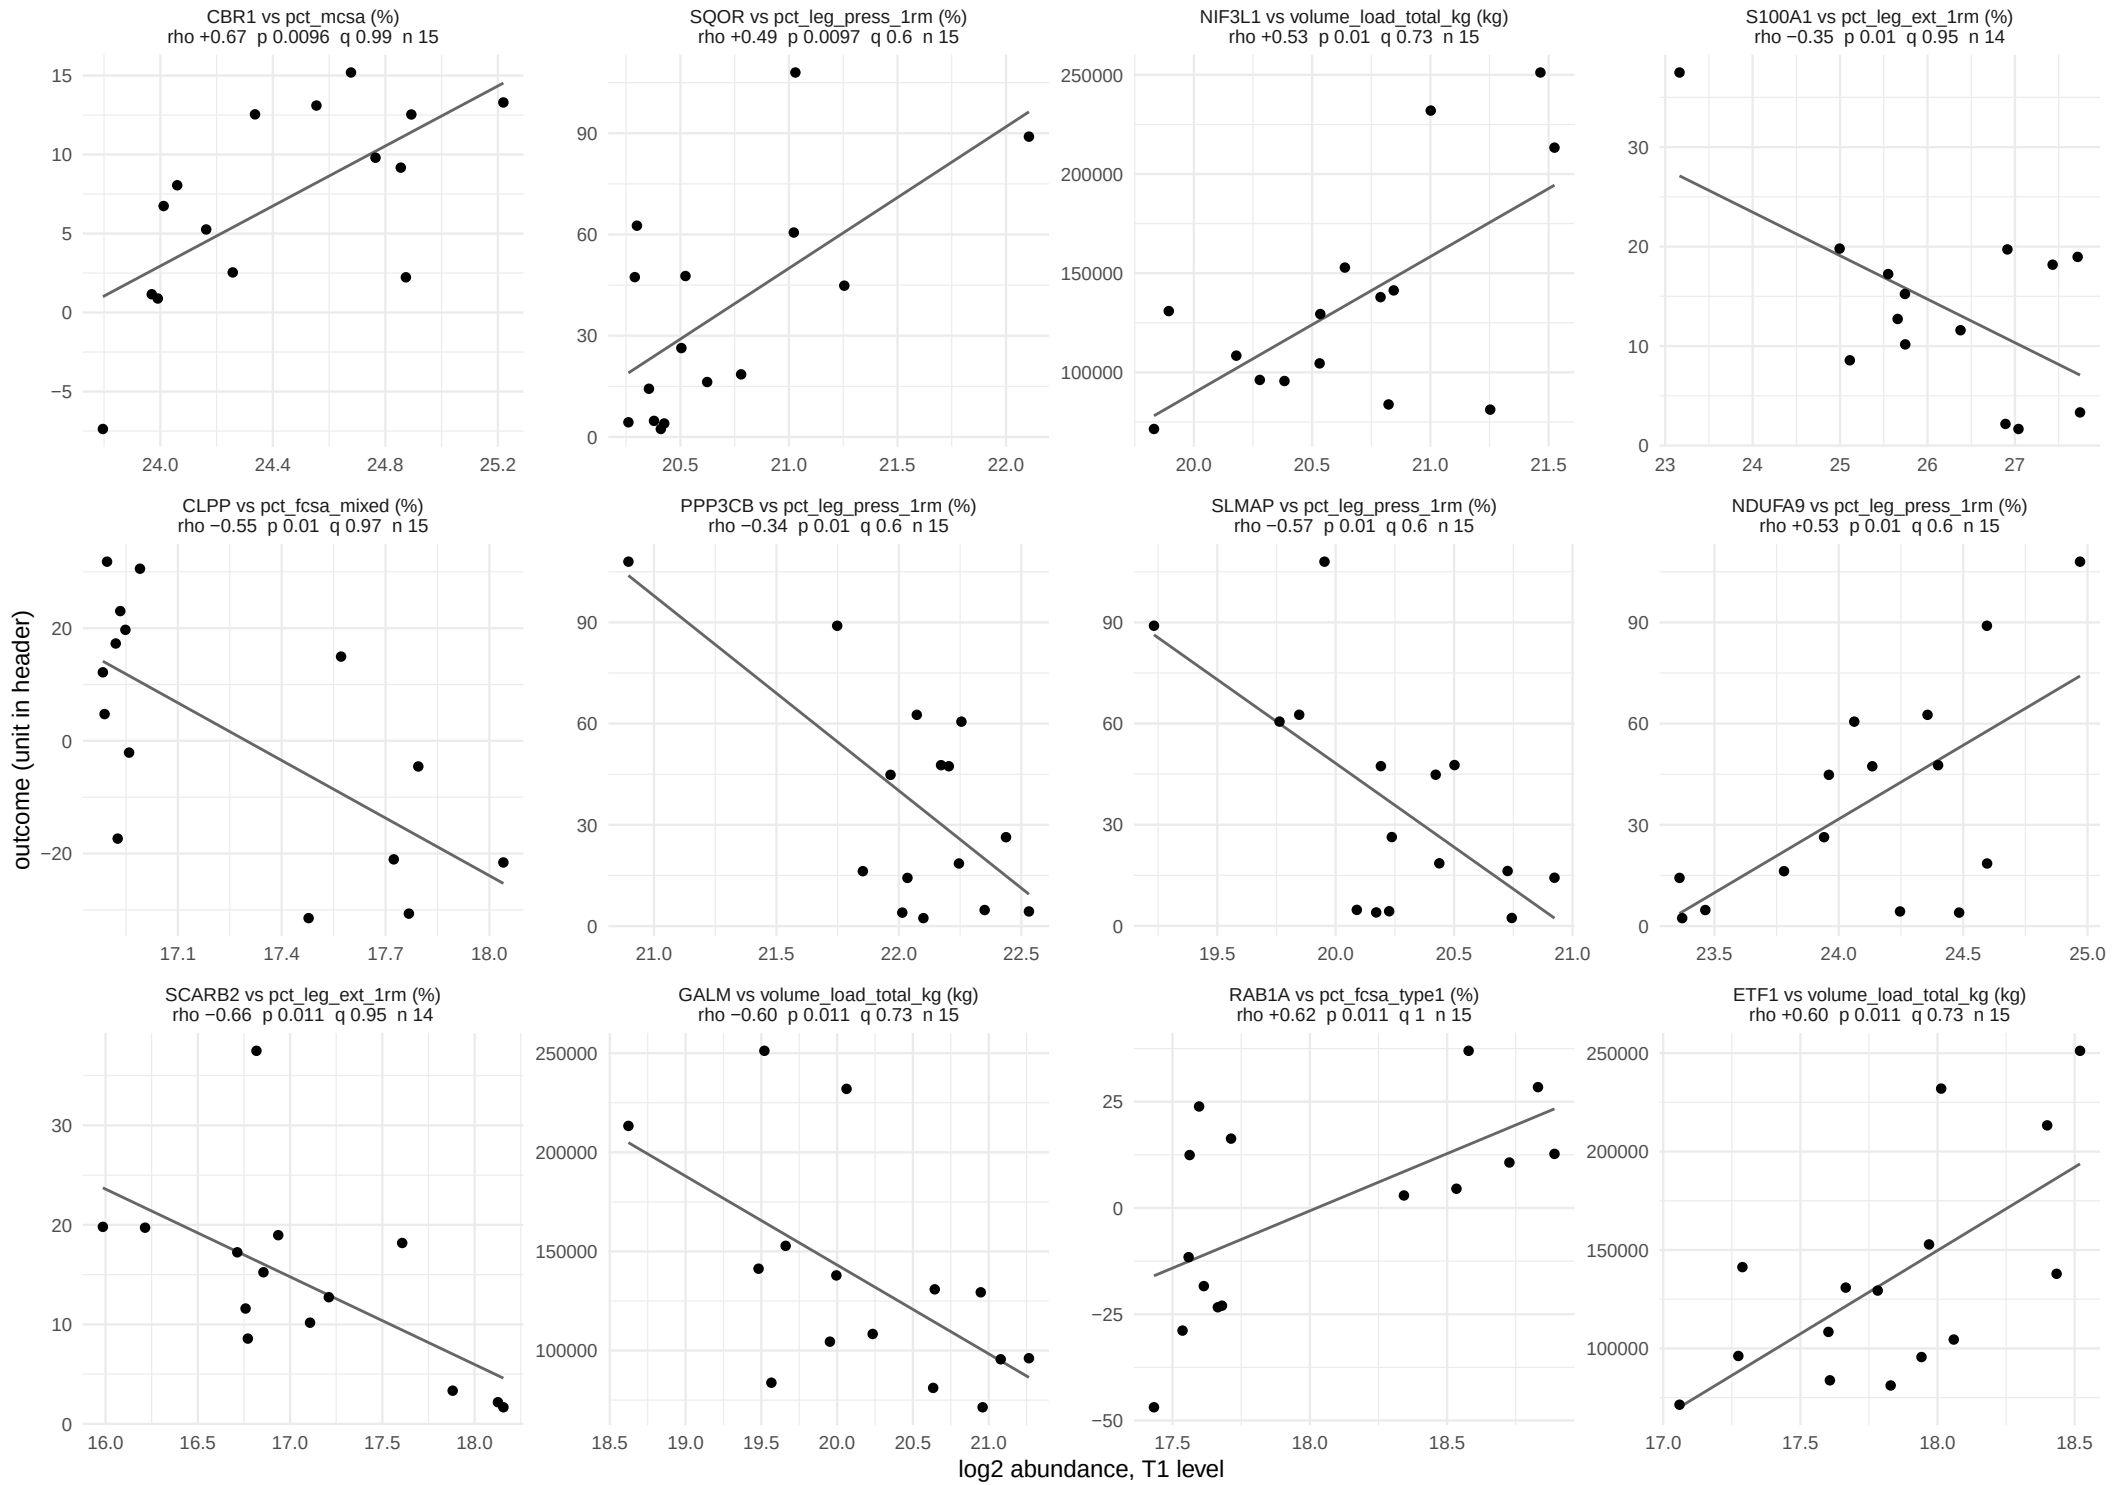

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline window


686 of 15200 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 11 of 58.

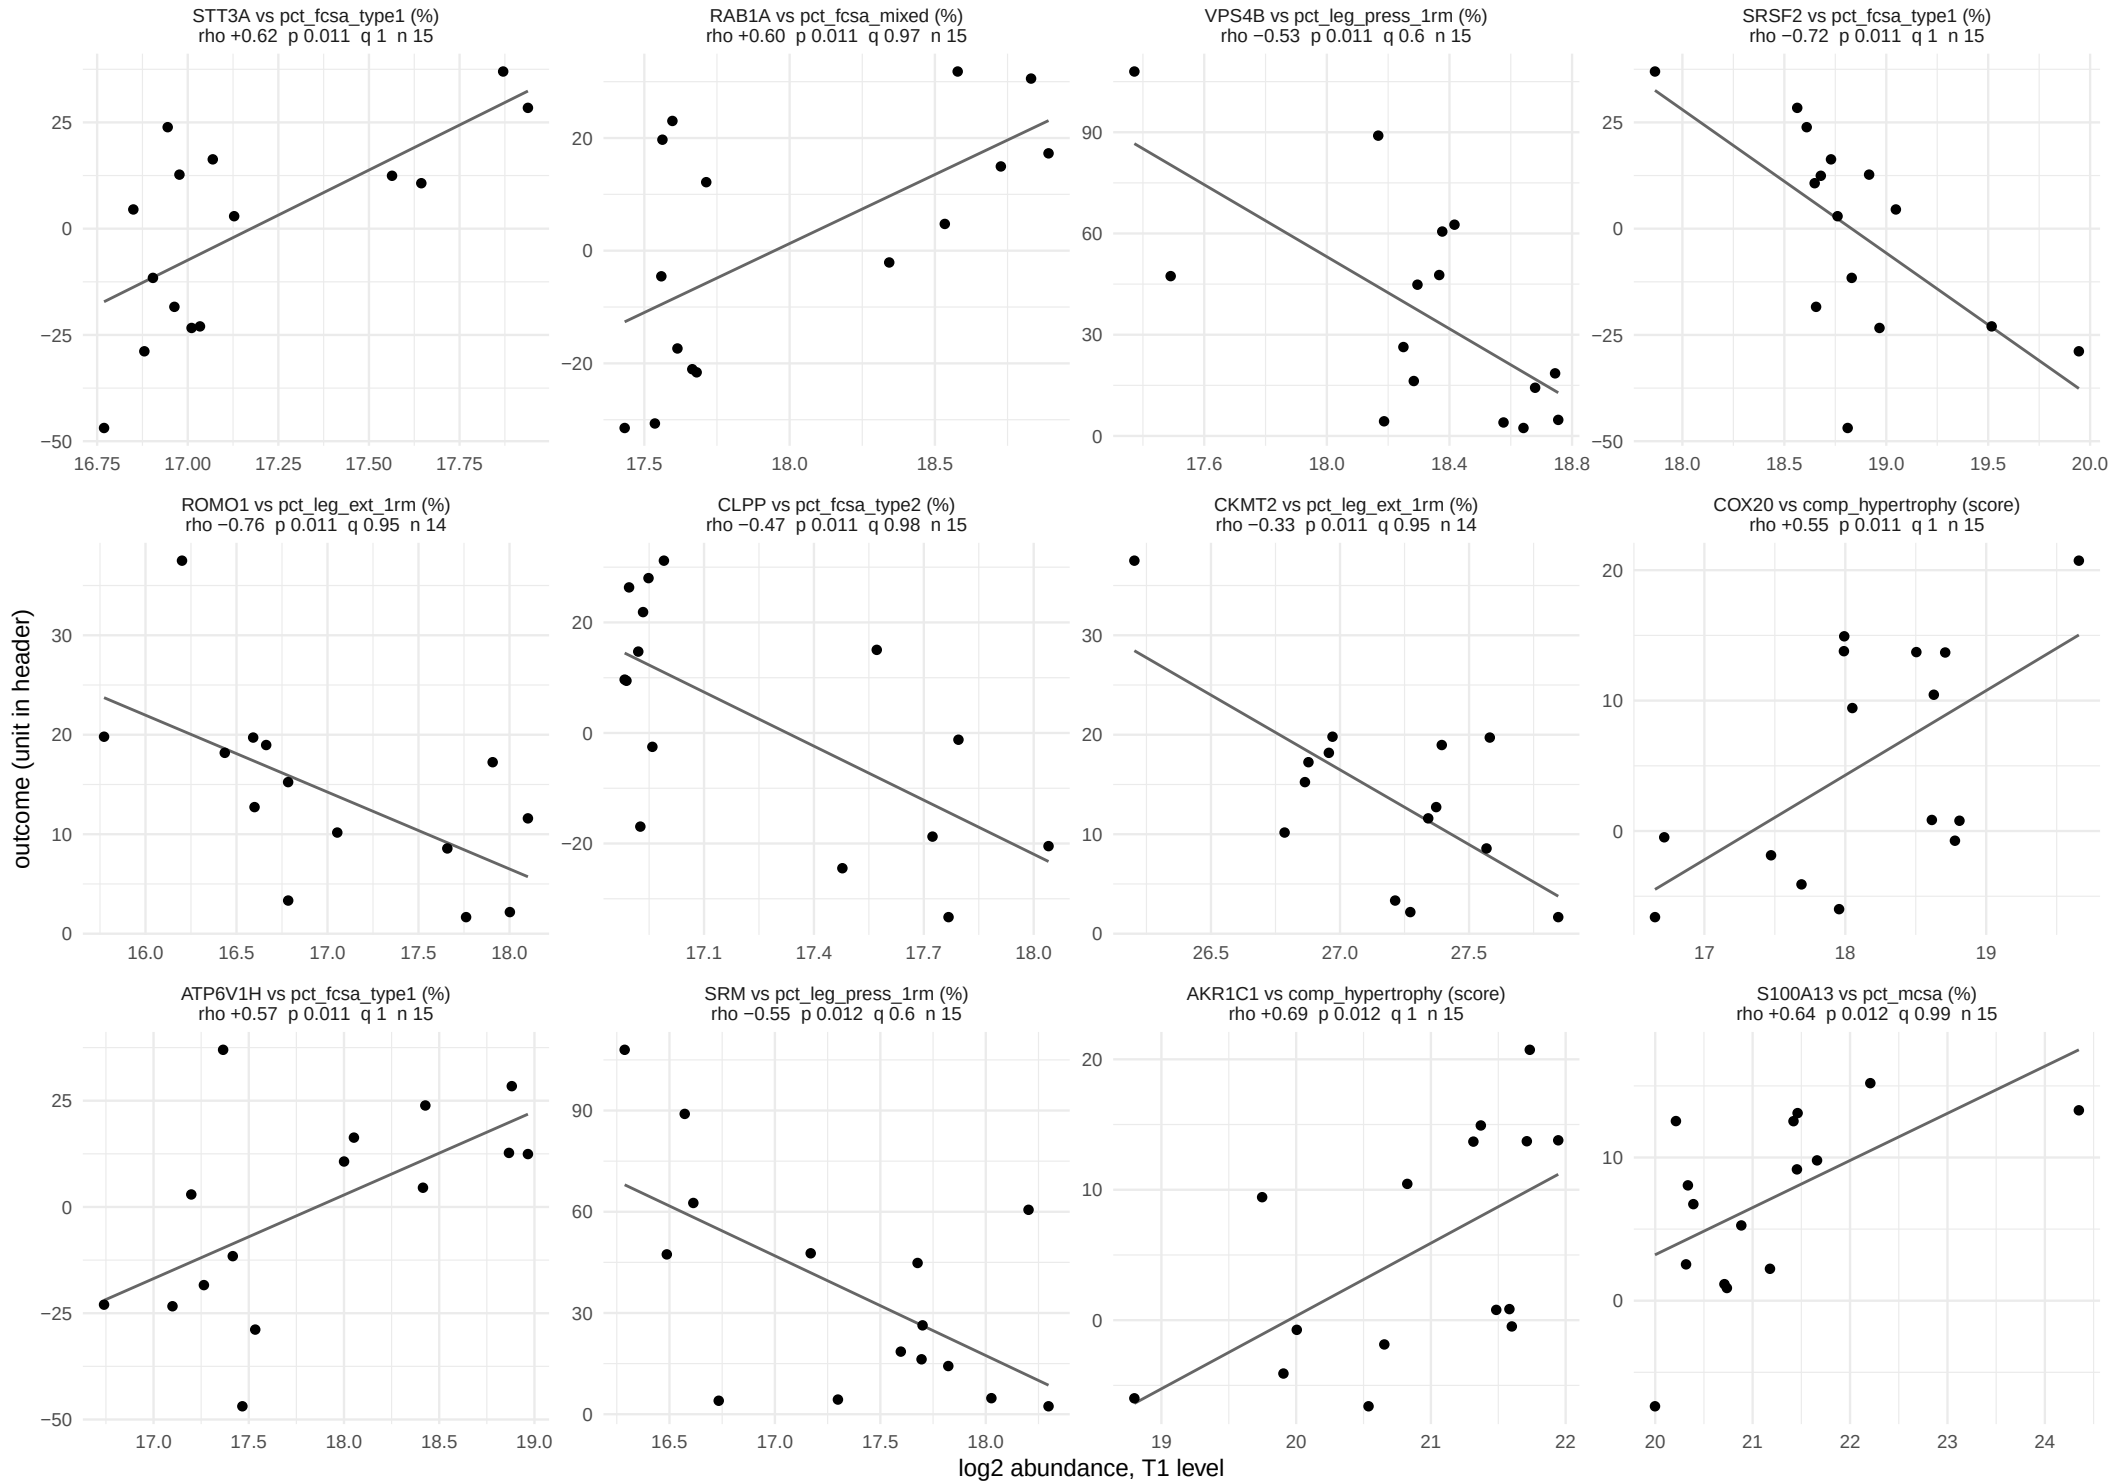

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline window


686 of 15200 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 12 of 58.

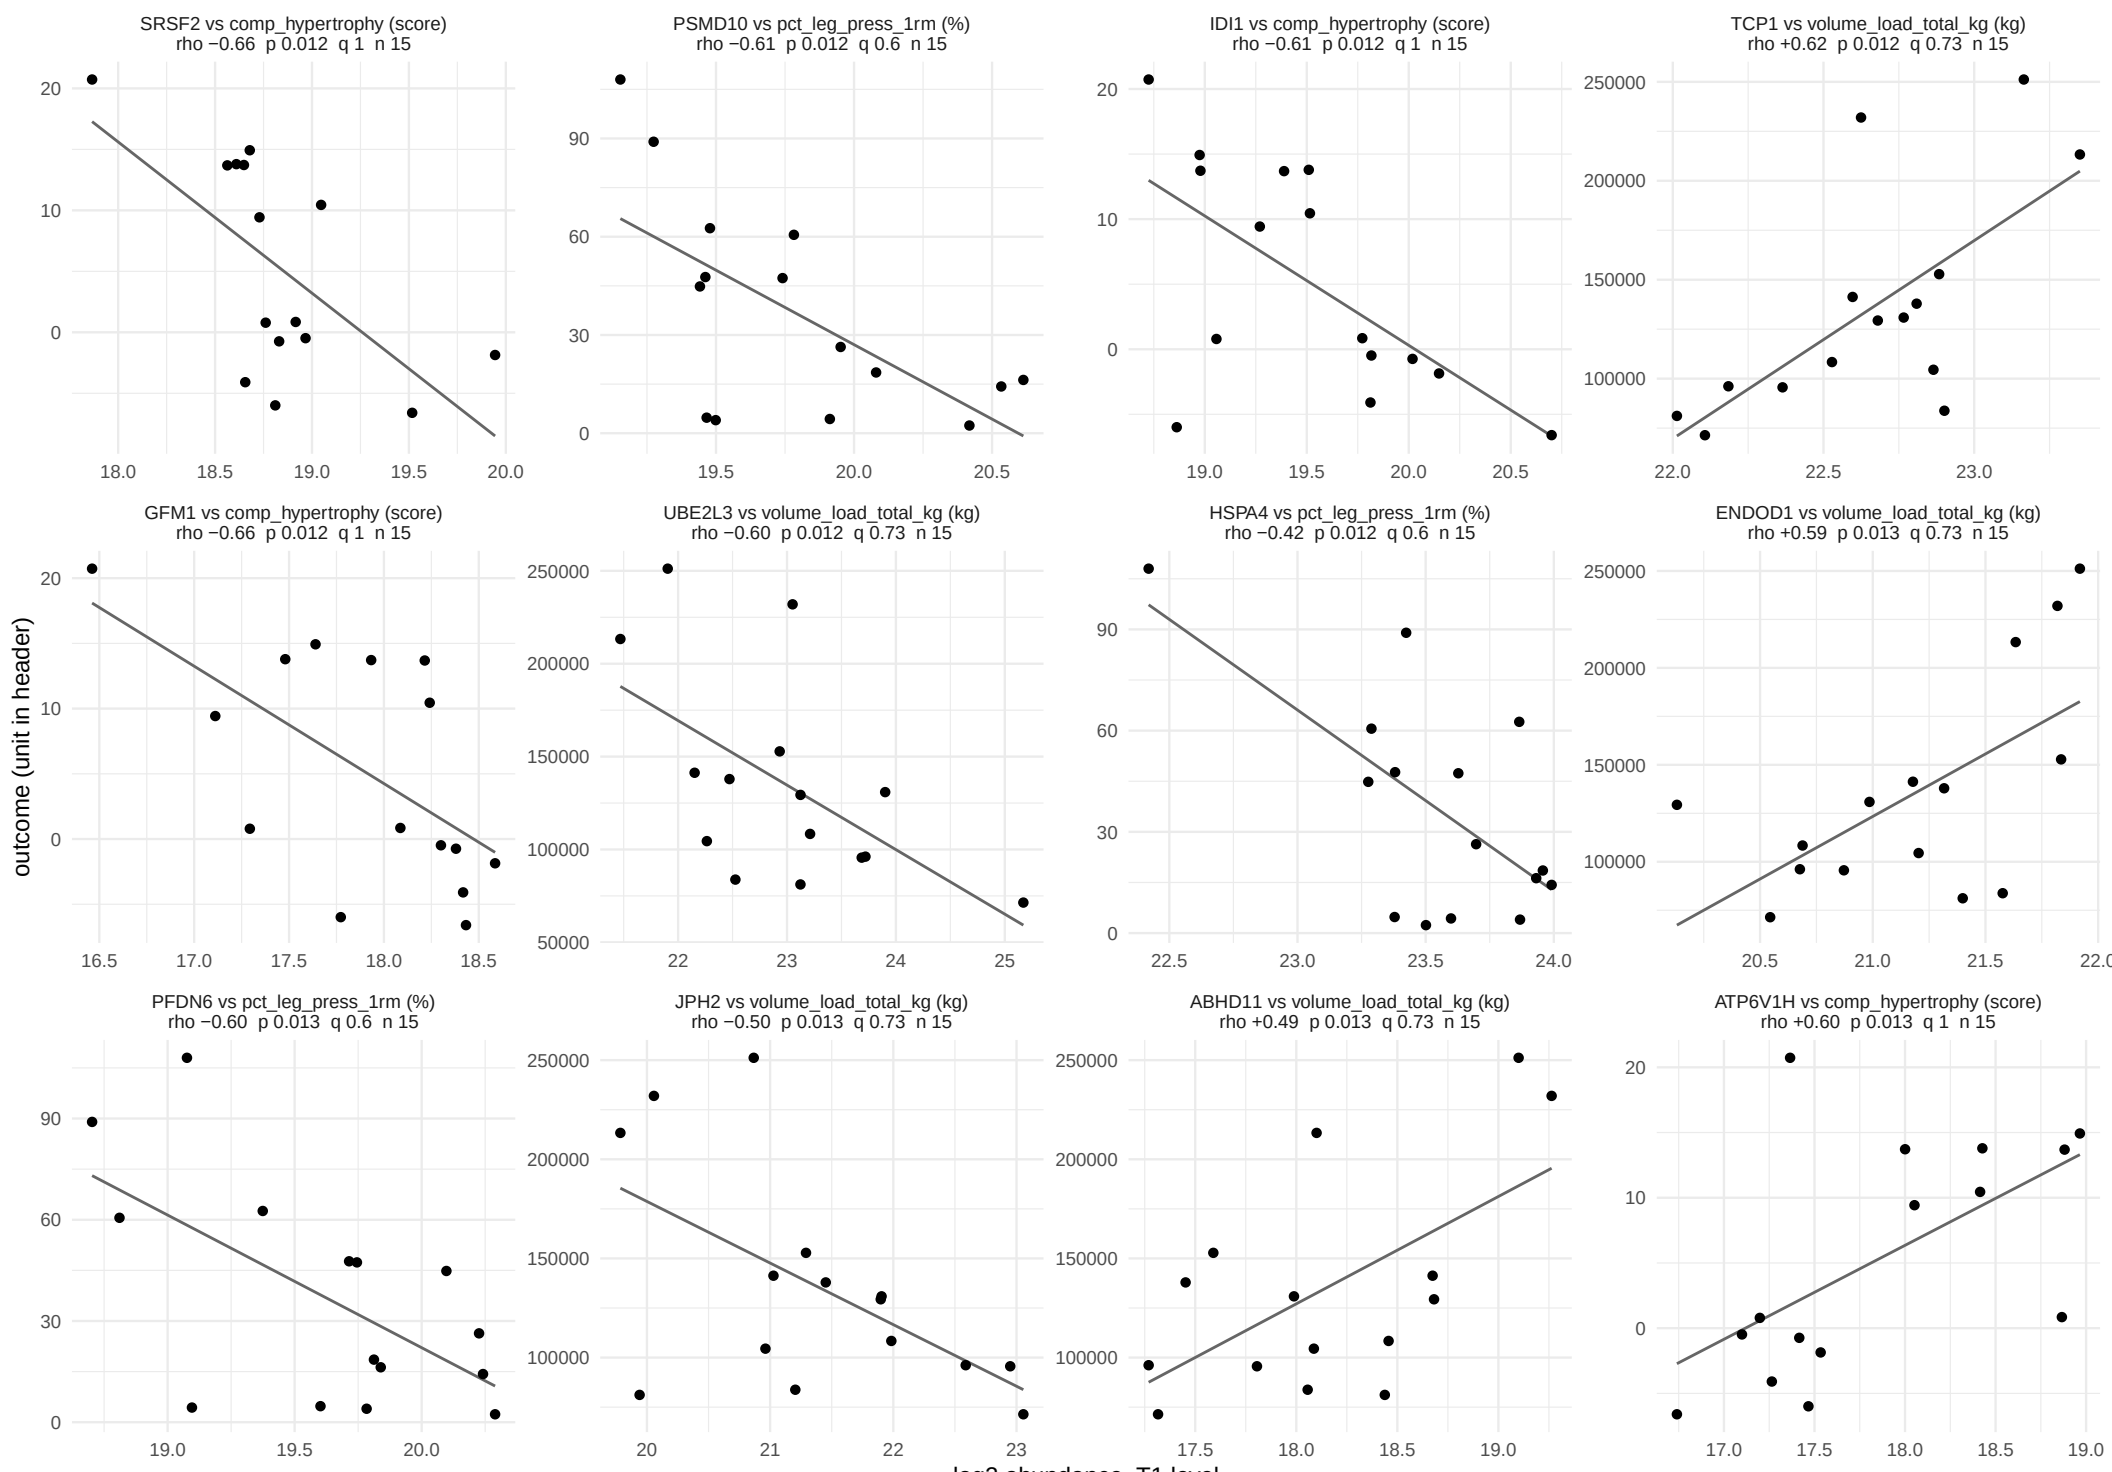

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline window


686 of 15200 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 13 of 58.

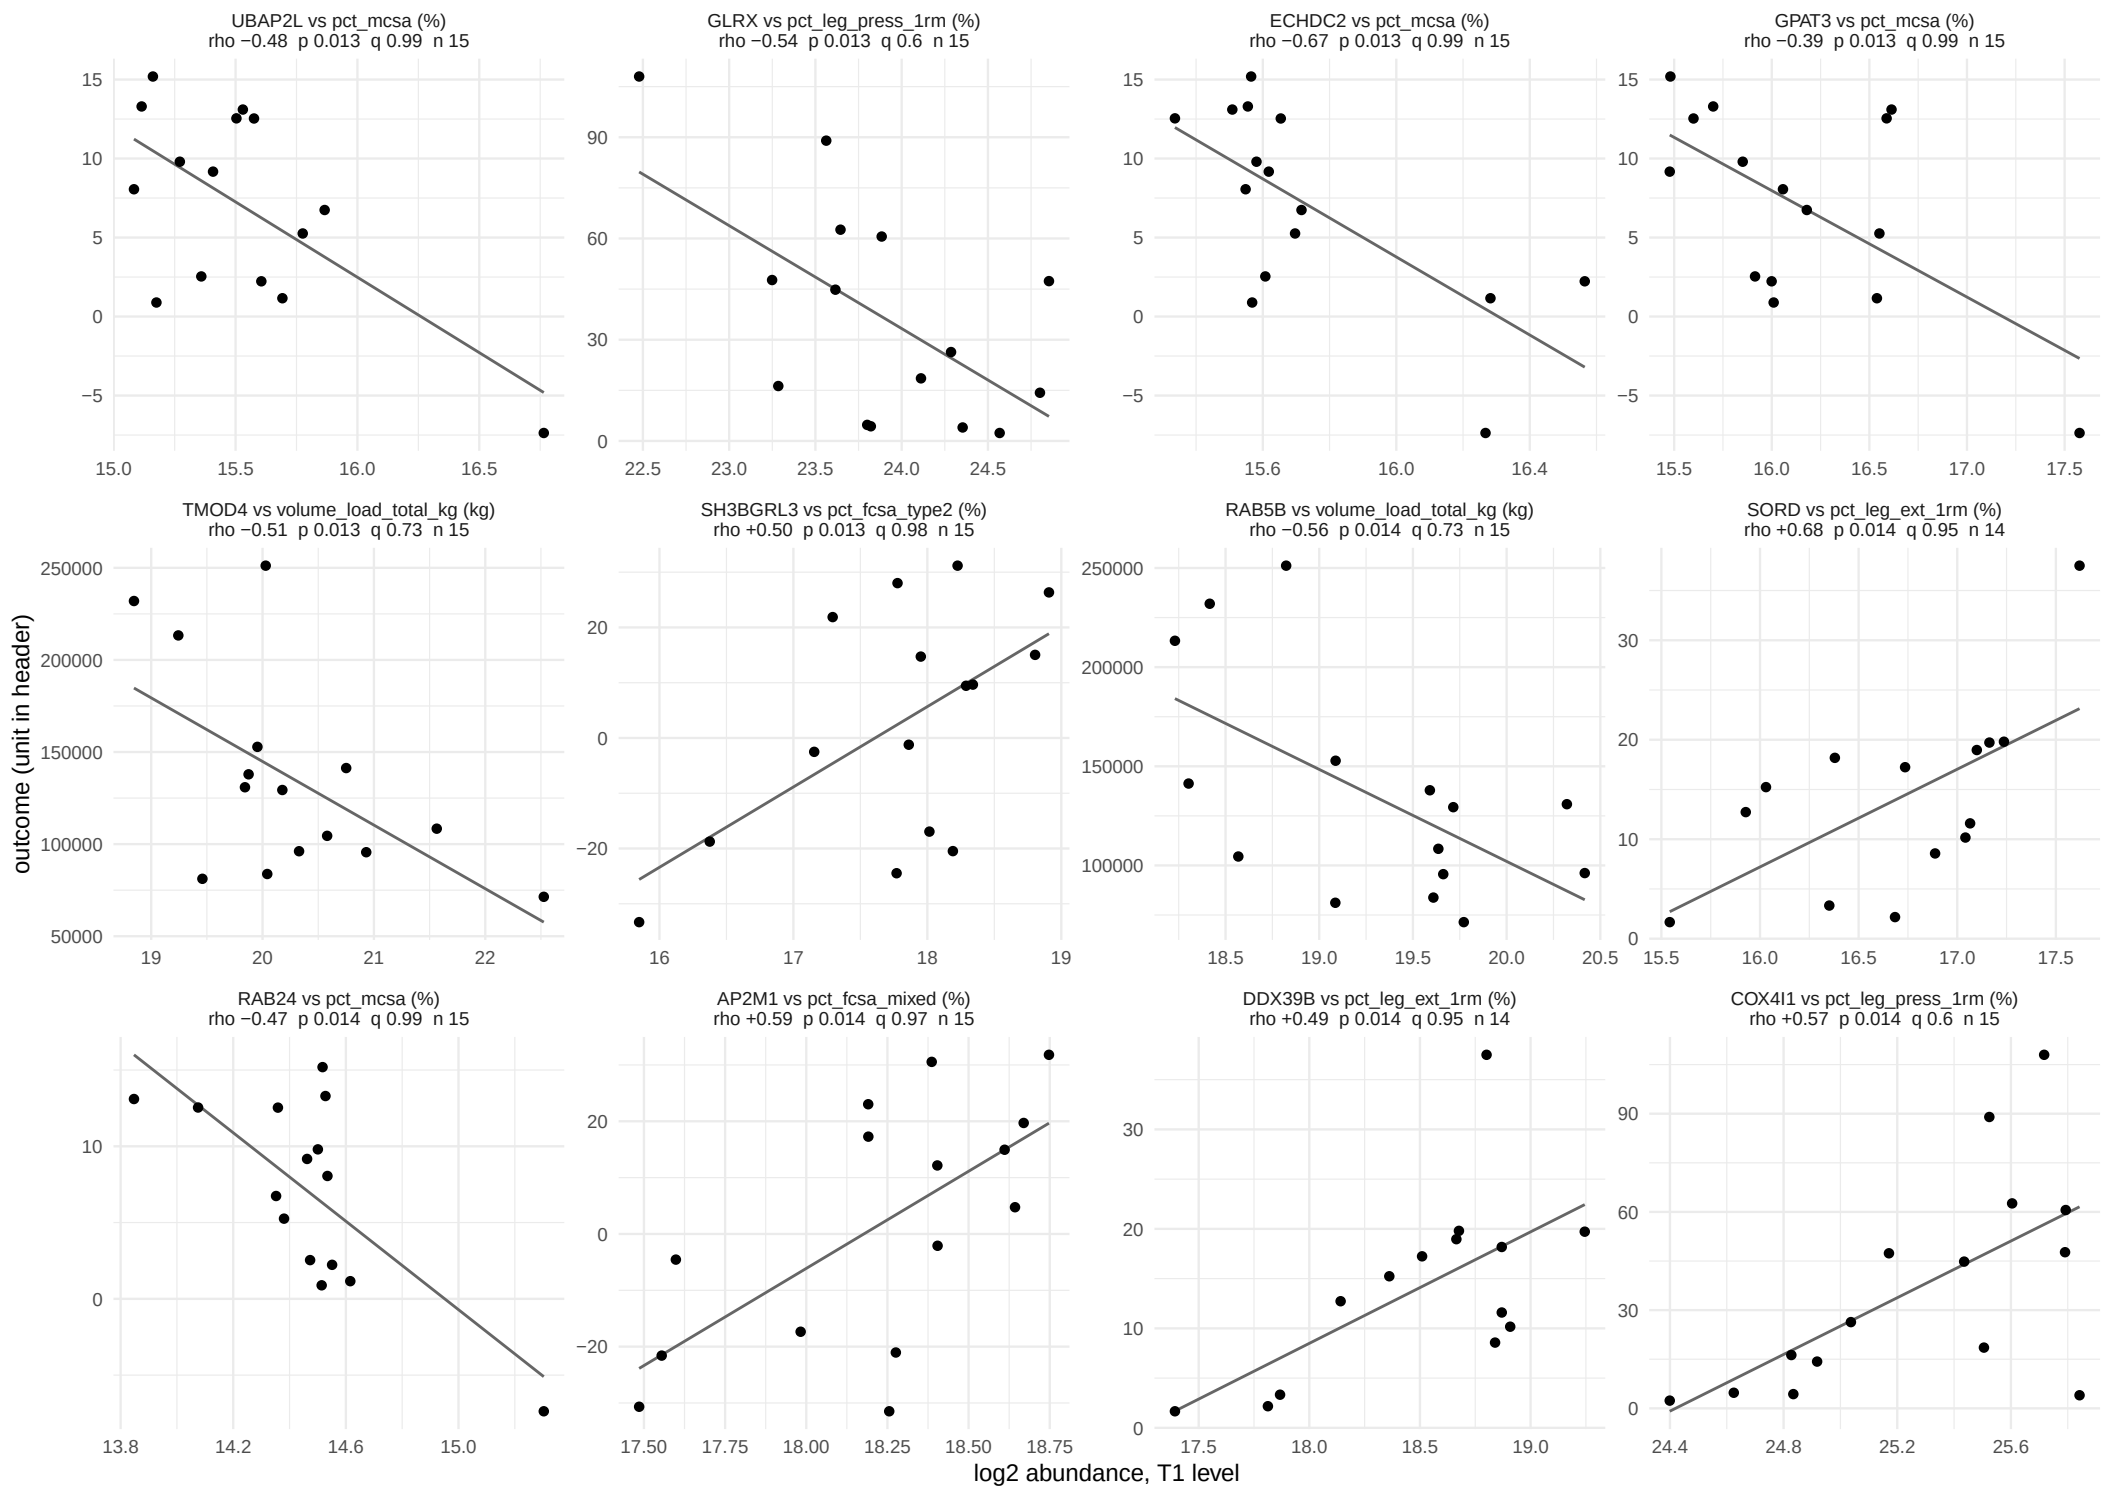

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline window


686 of 15200 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 14 of 58.

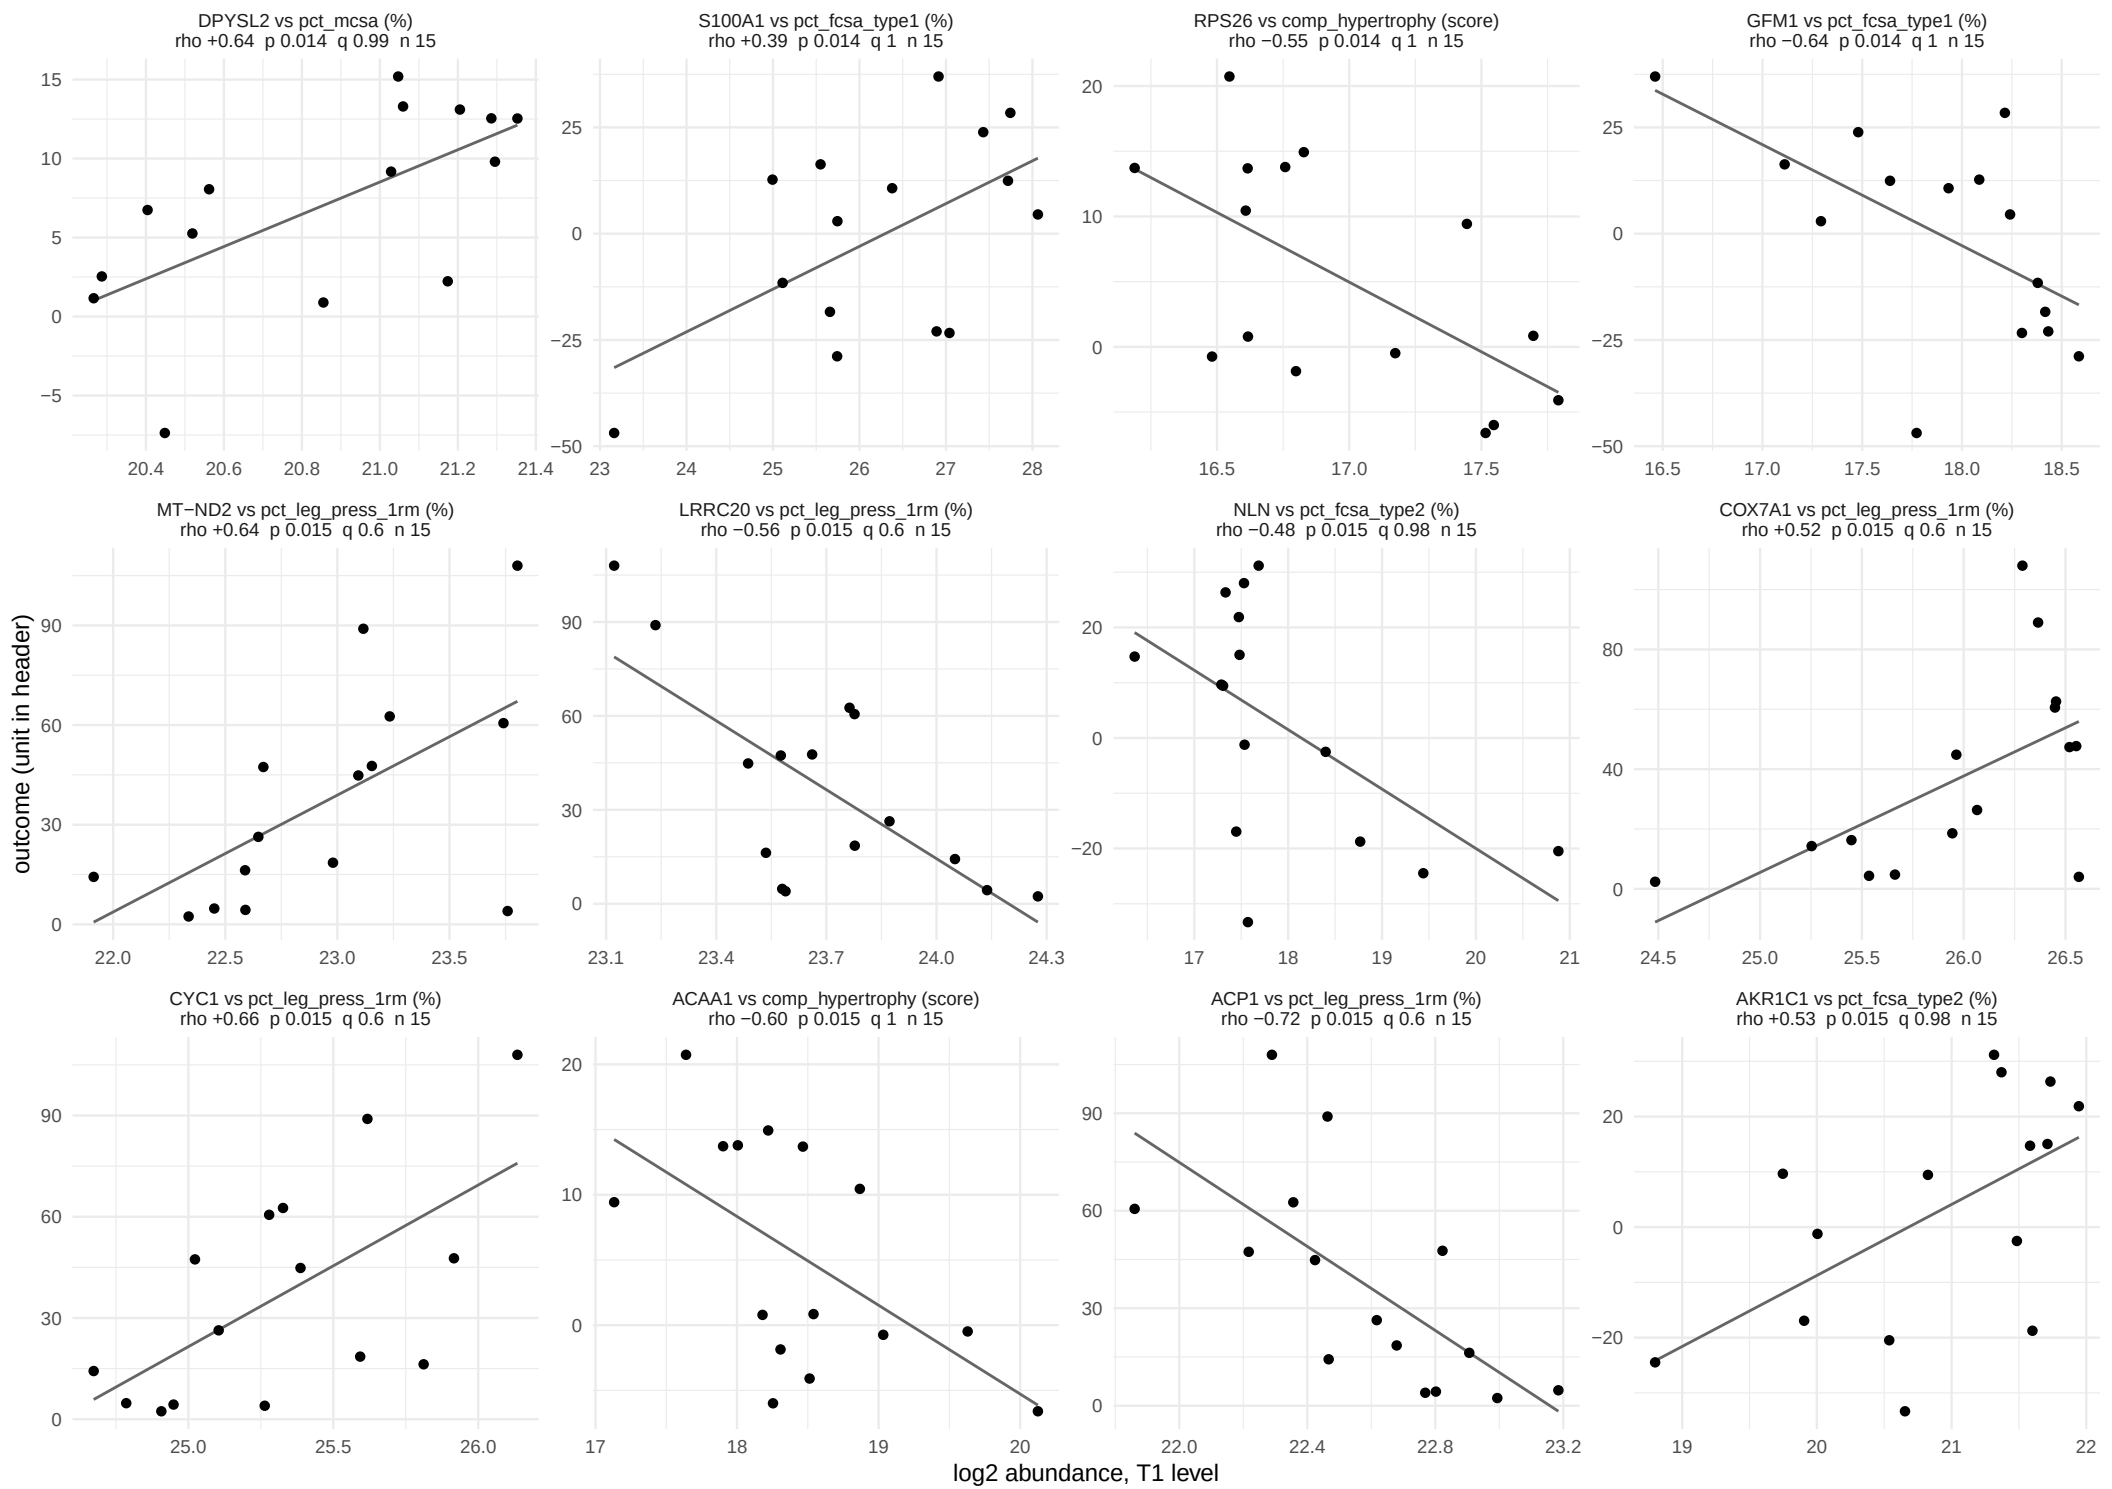

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline window


686 of 15200 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 15 of 58.

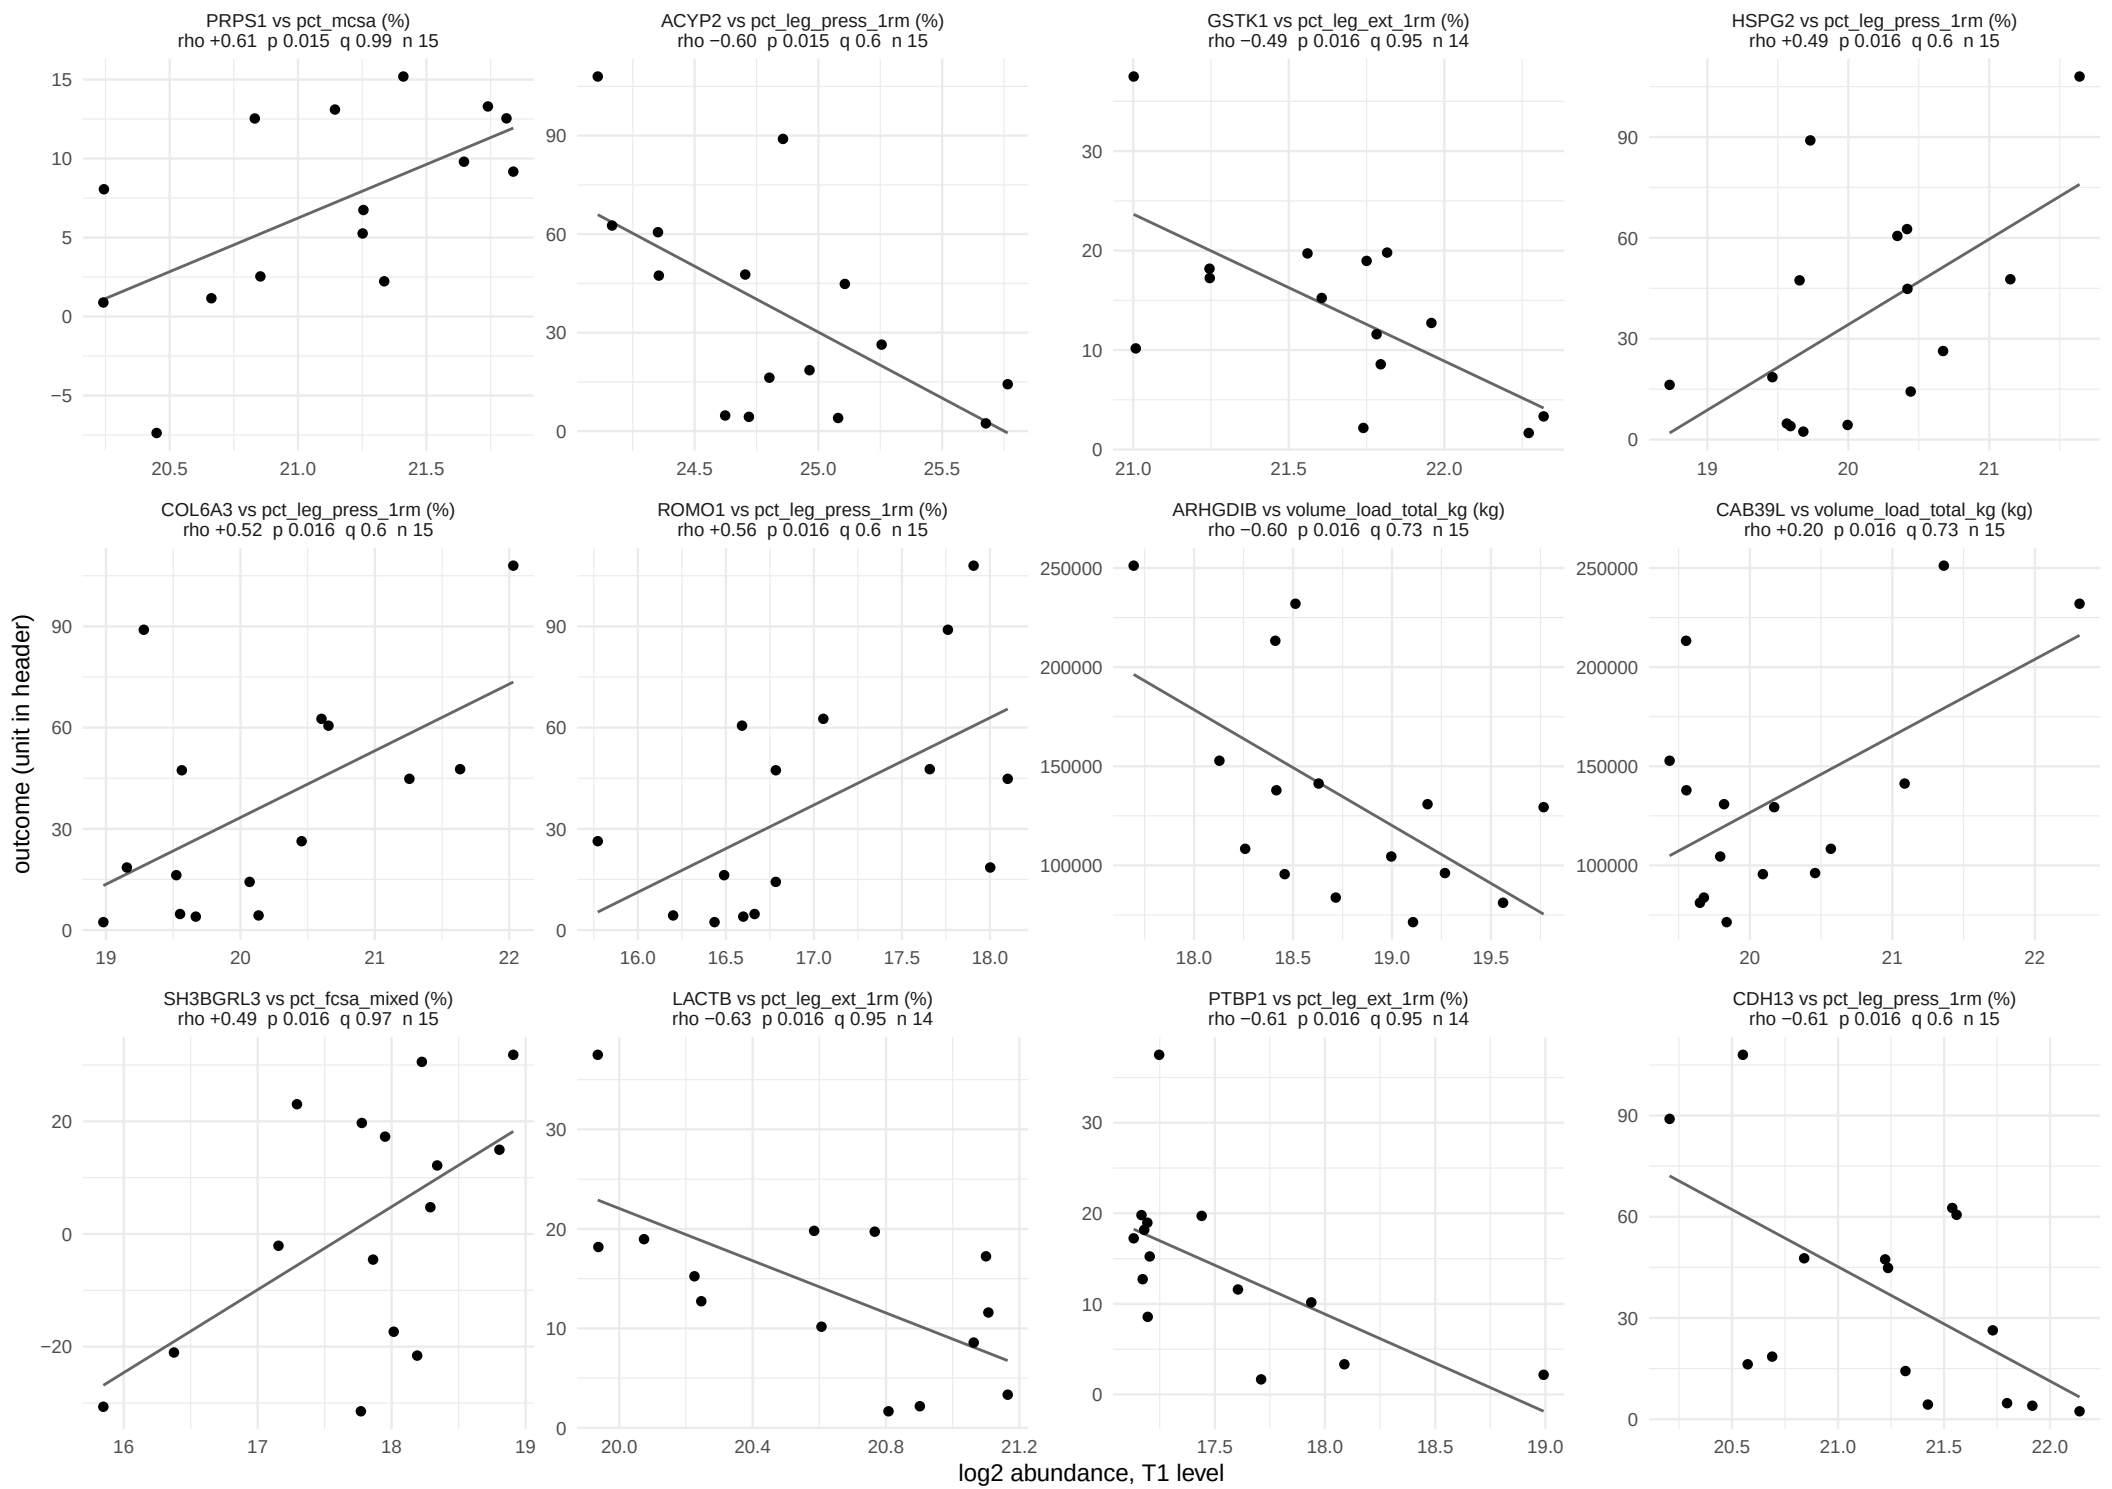

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline window


686 of 15200 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 16 of 58.

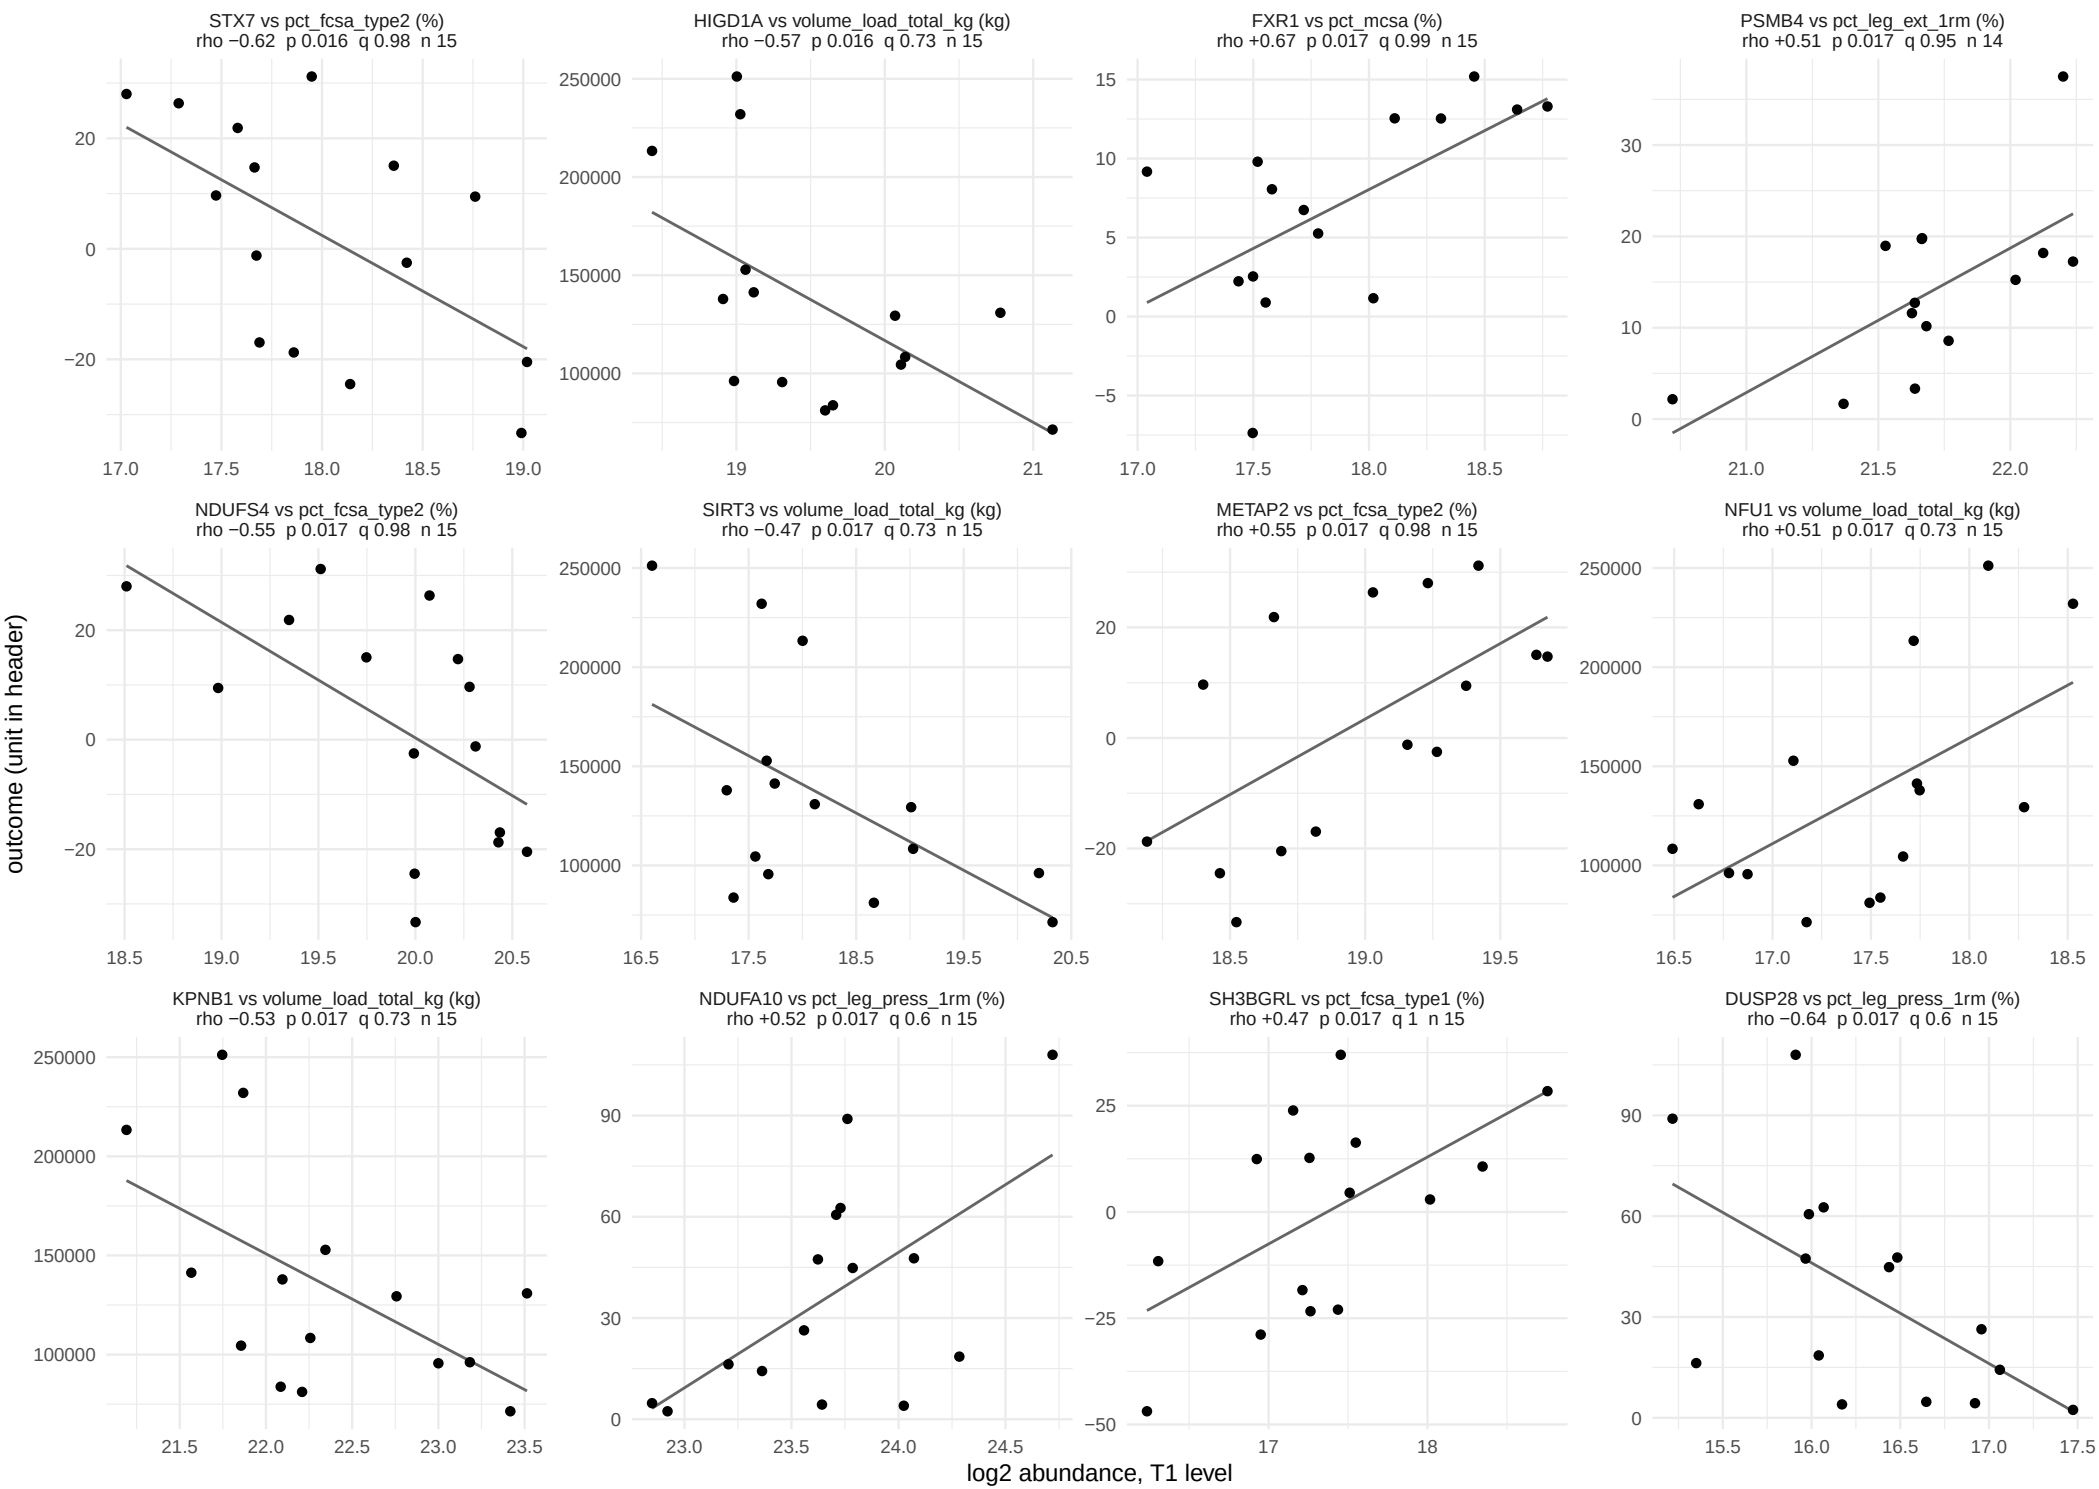

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline window


686 of 15200 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 17 of 58.

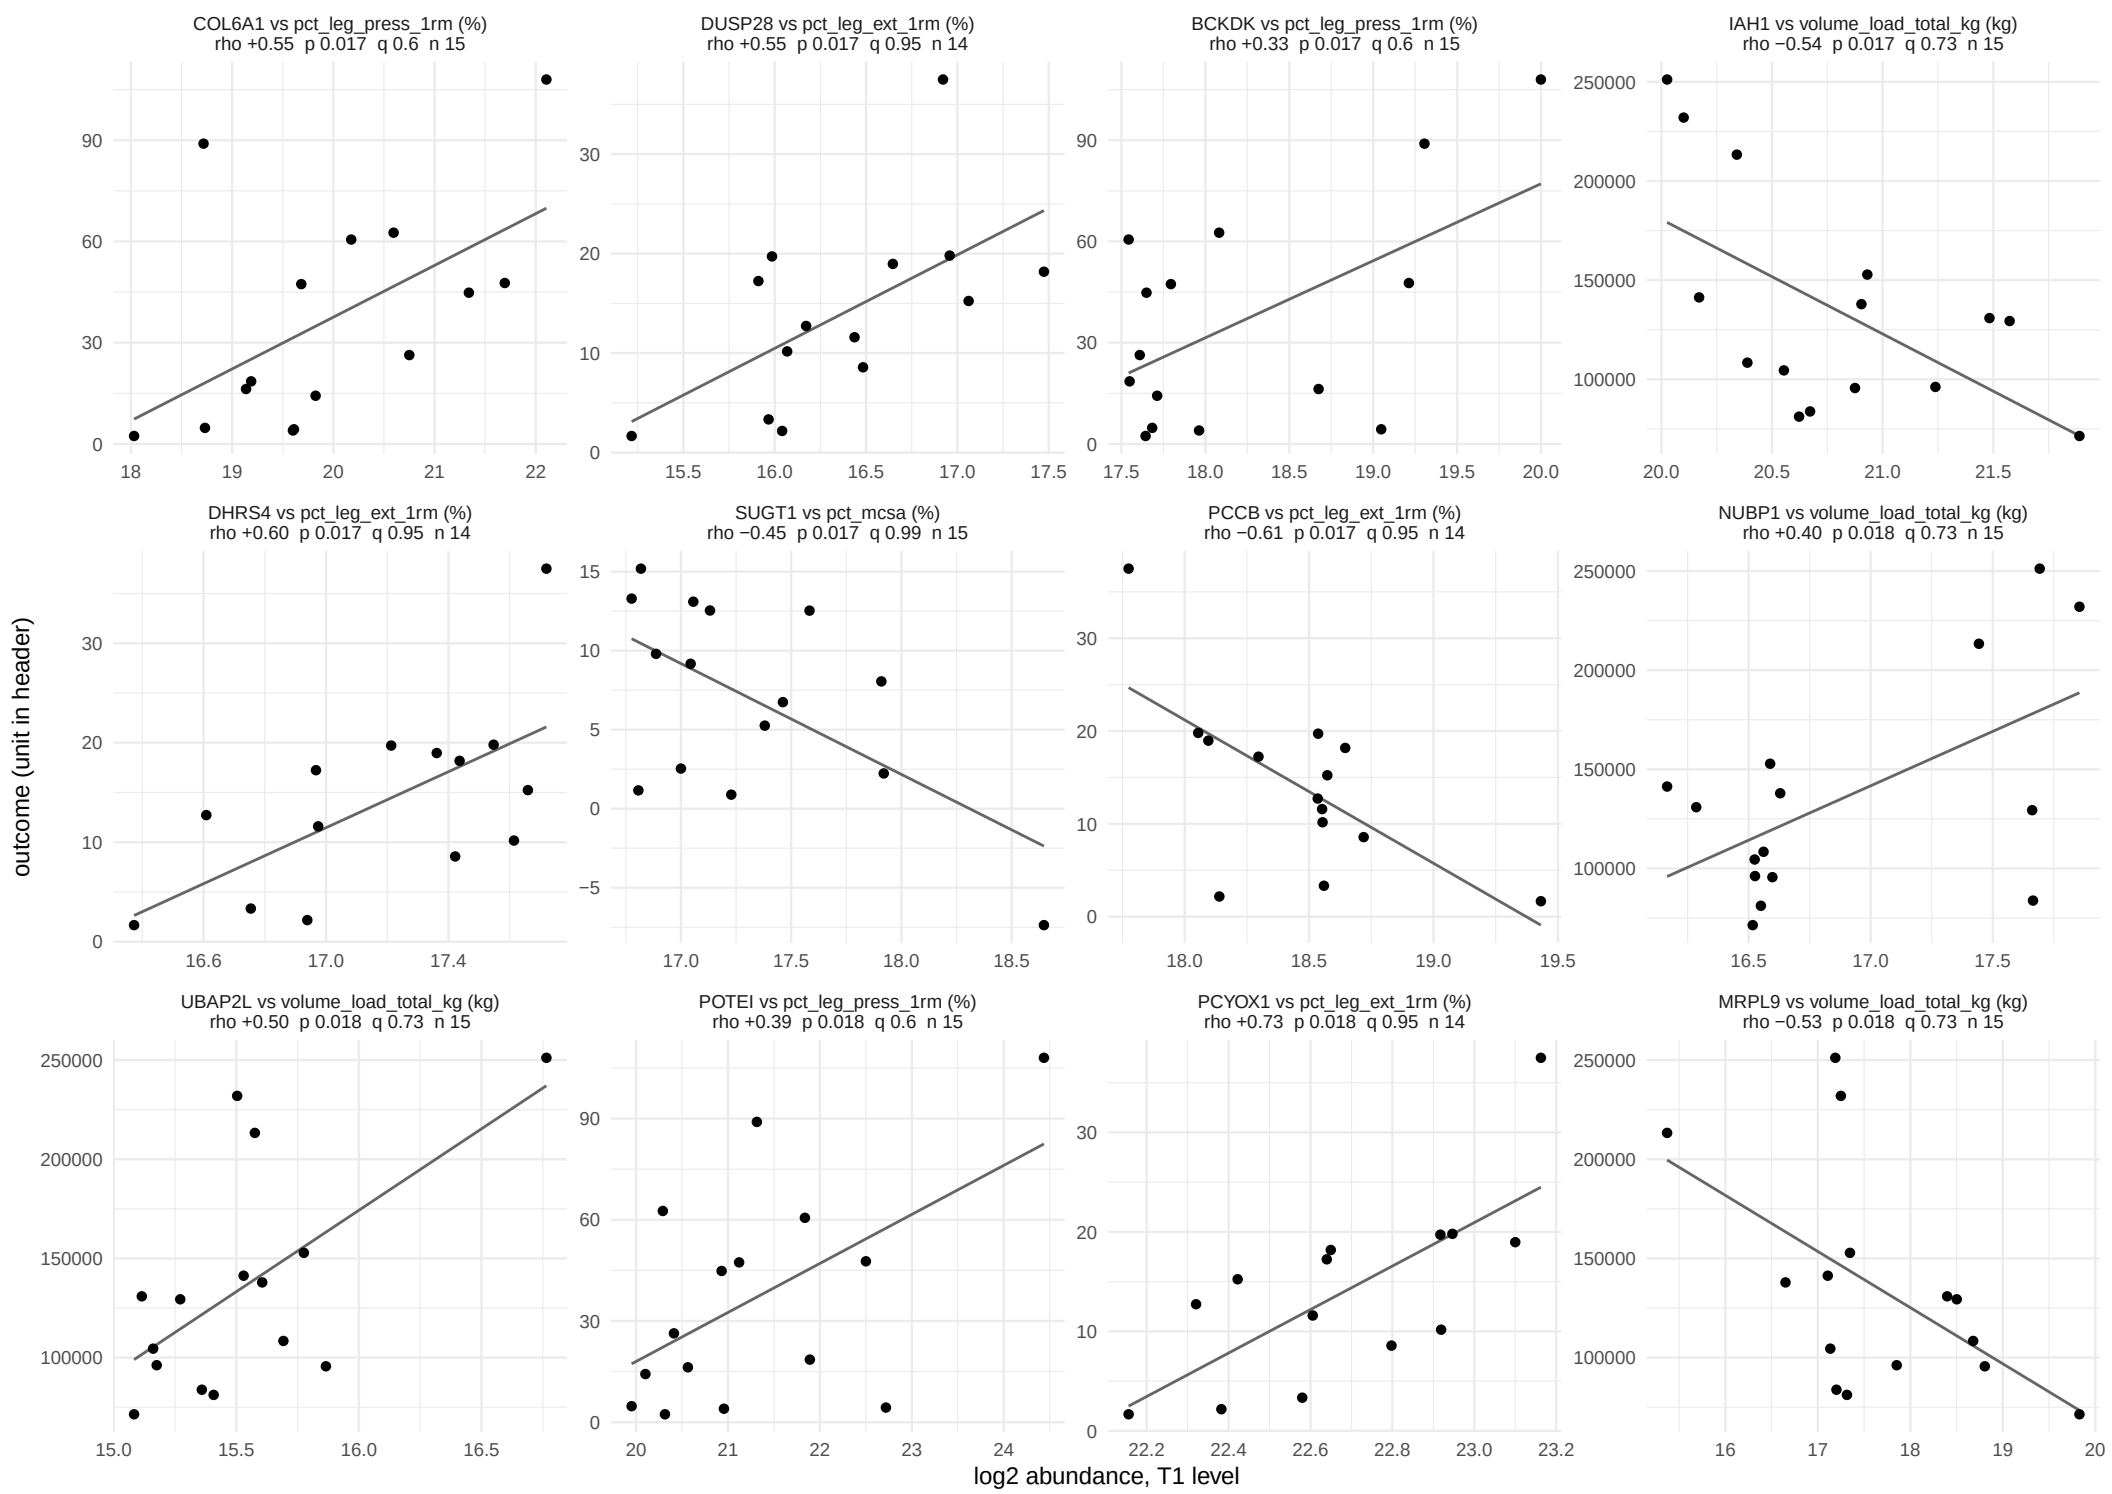

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline window


686 of 15200 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 18 of 58.

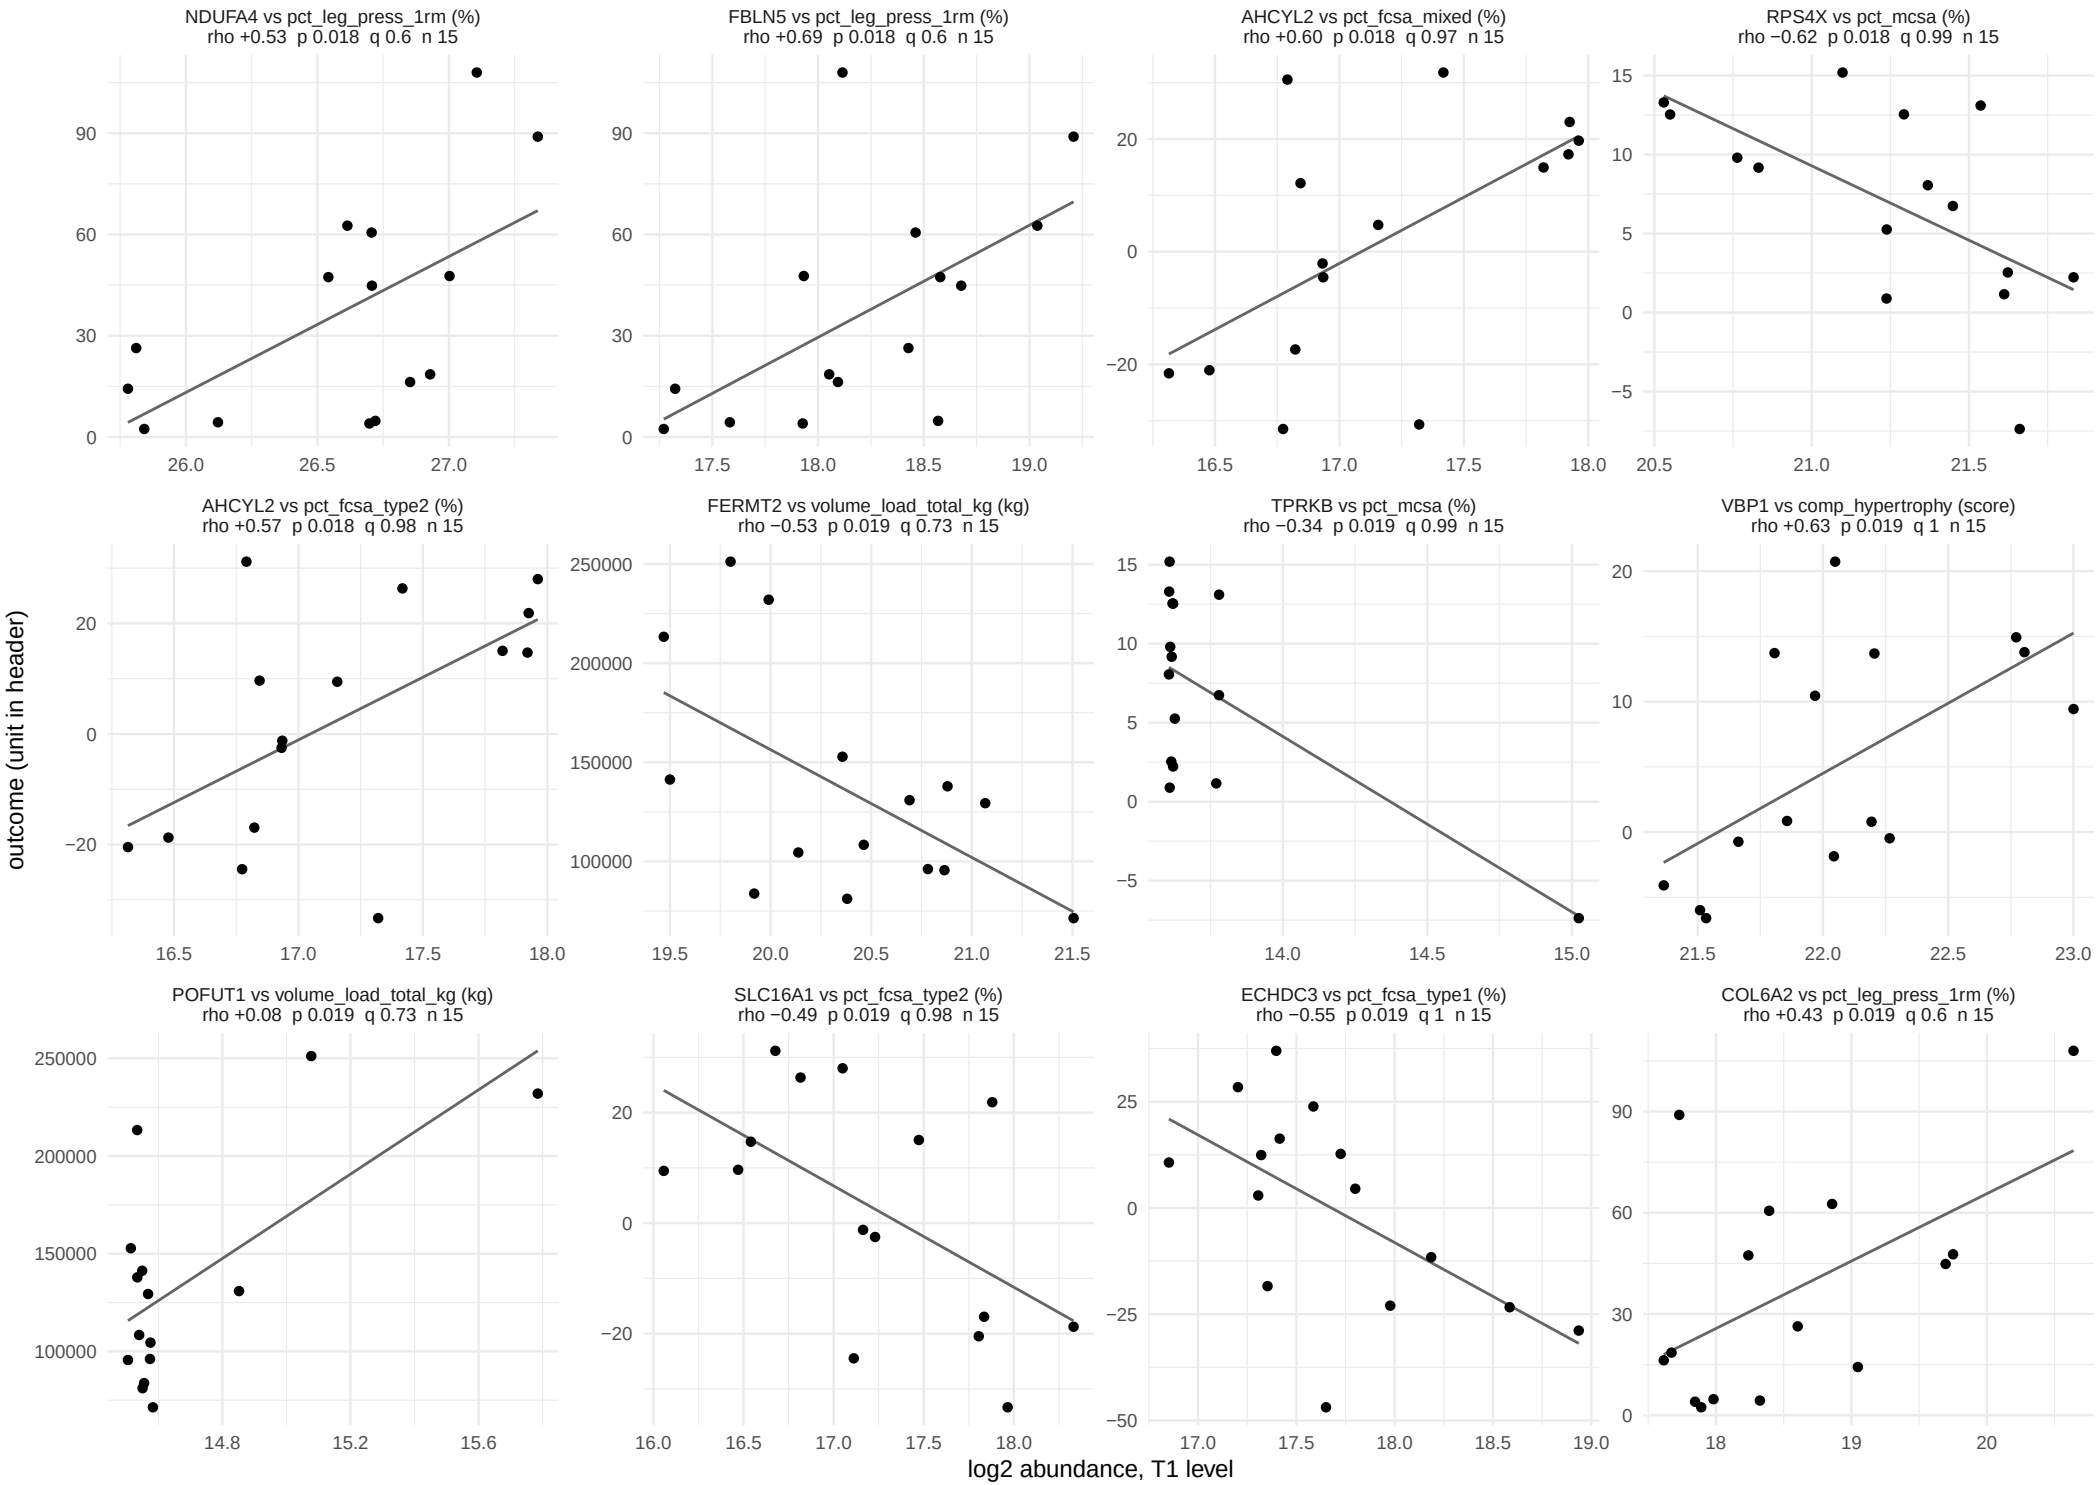

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline window


686 of 15200 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 19 of 58.

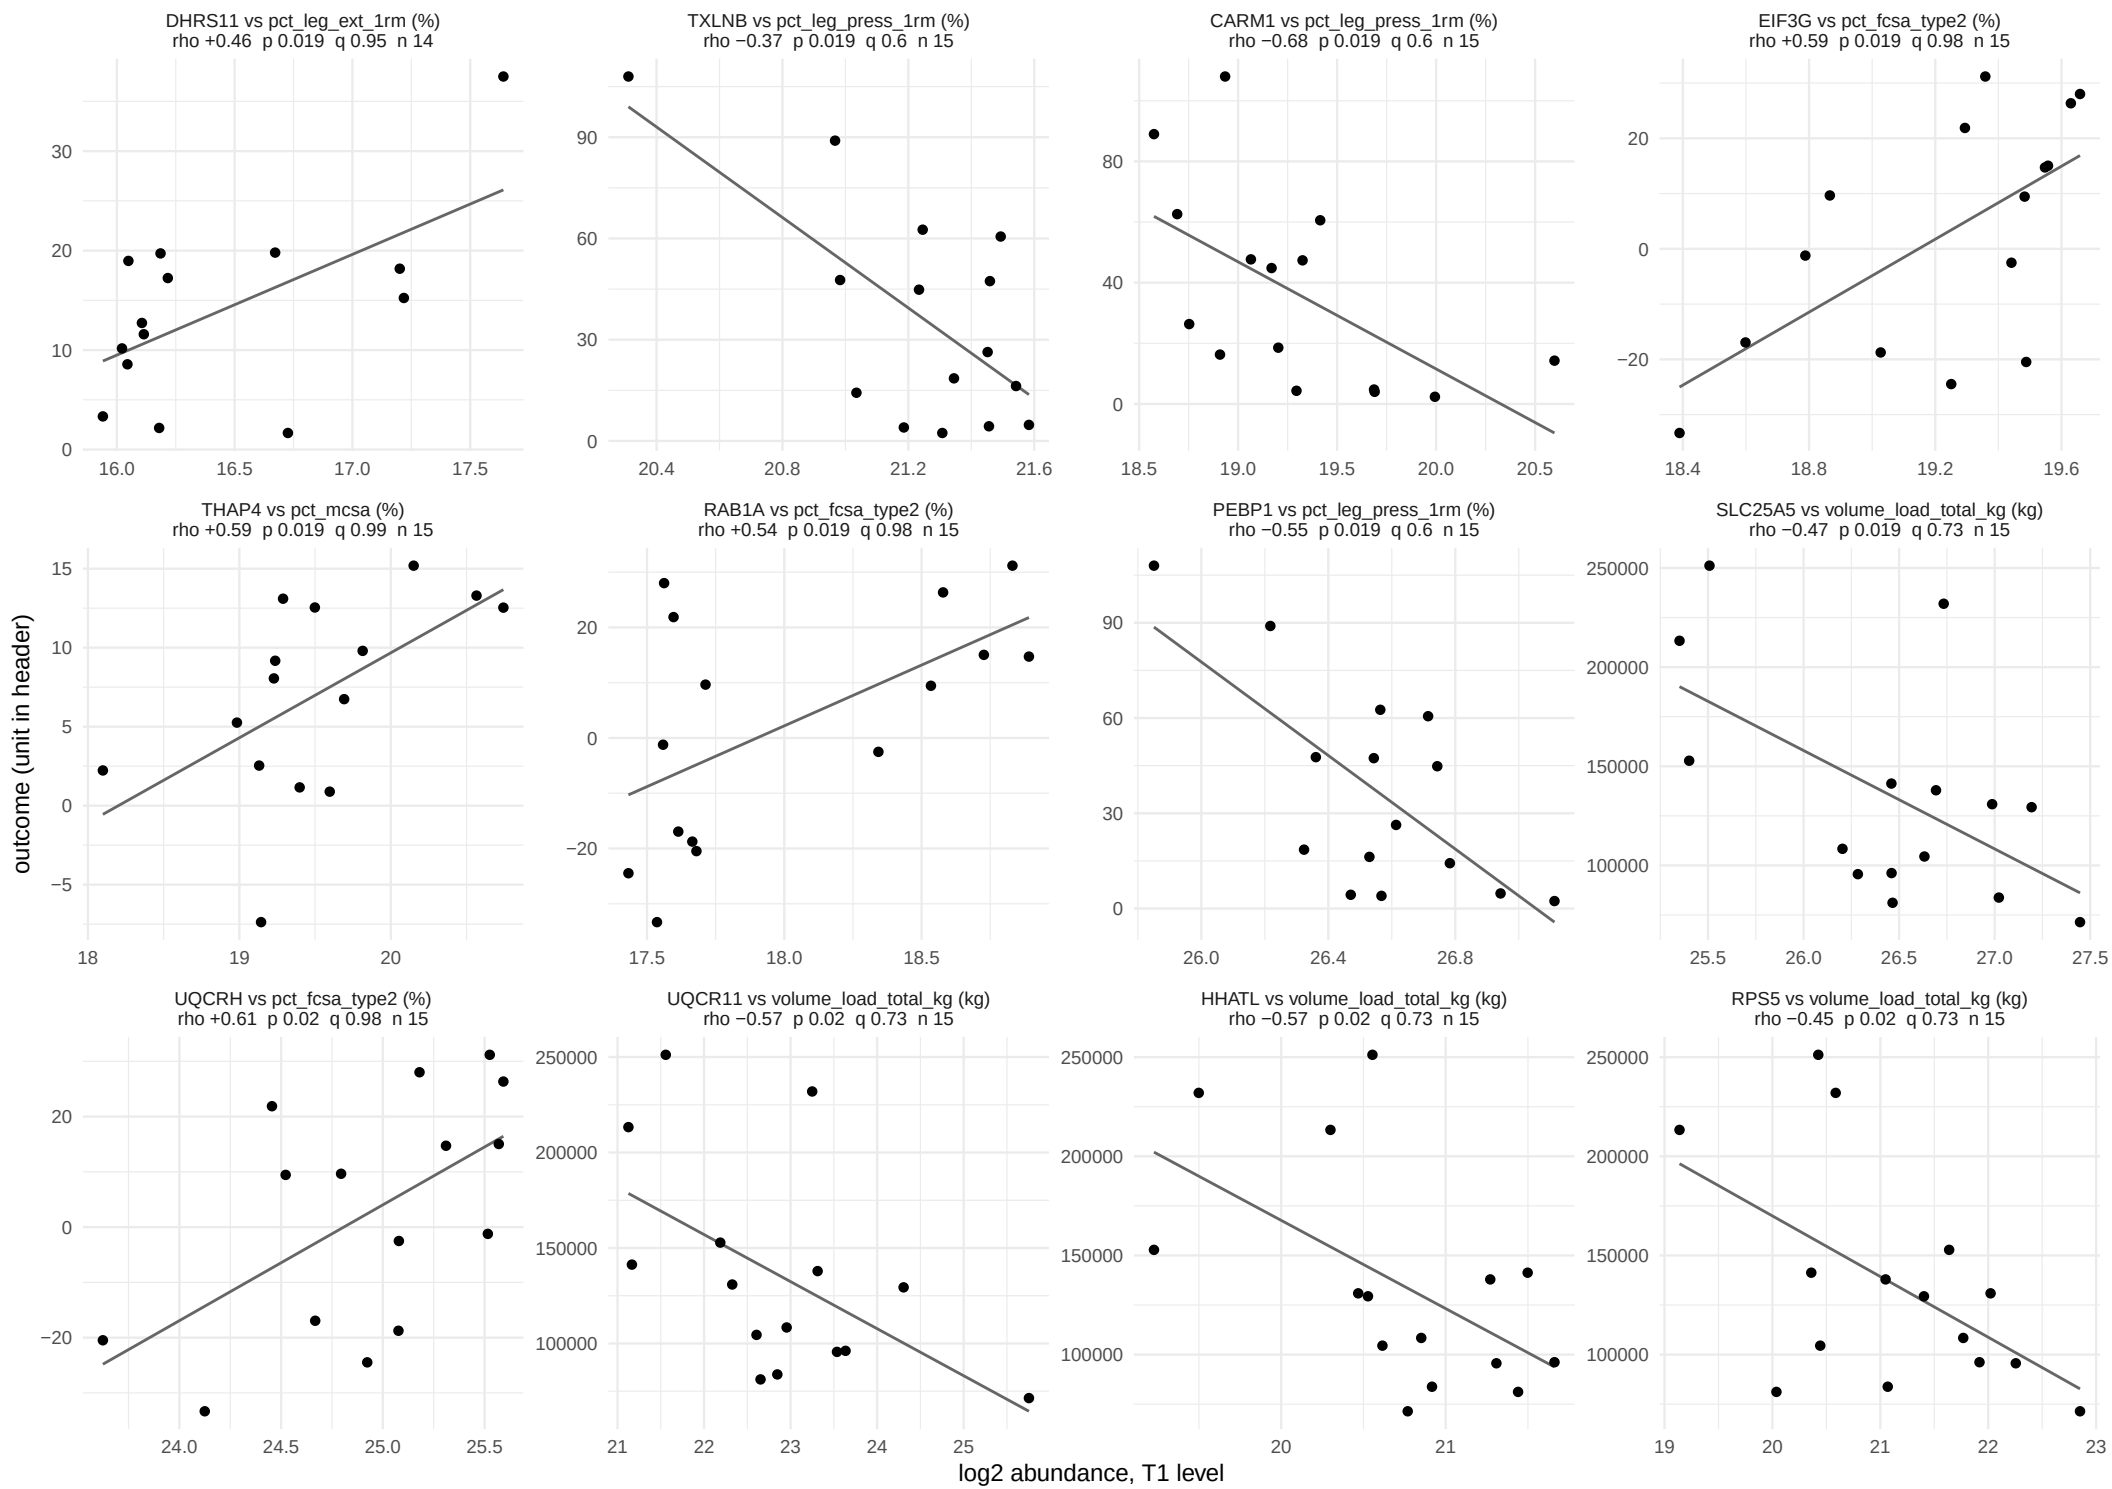

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline window


686 of 15200 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 20 of 58.

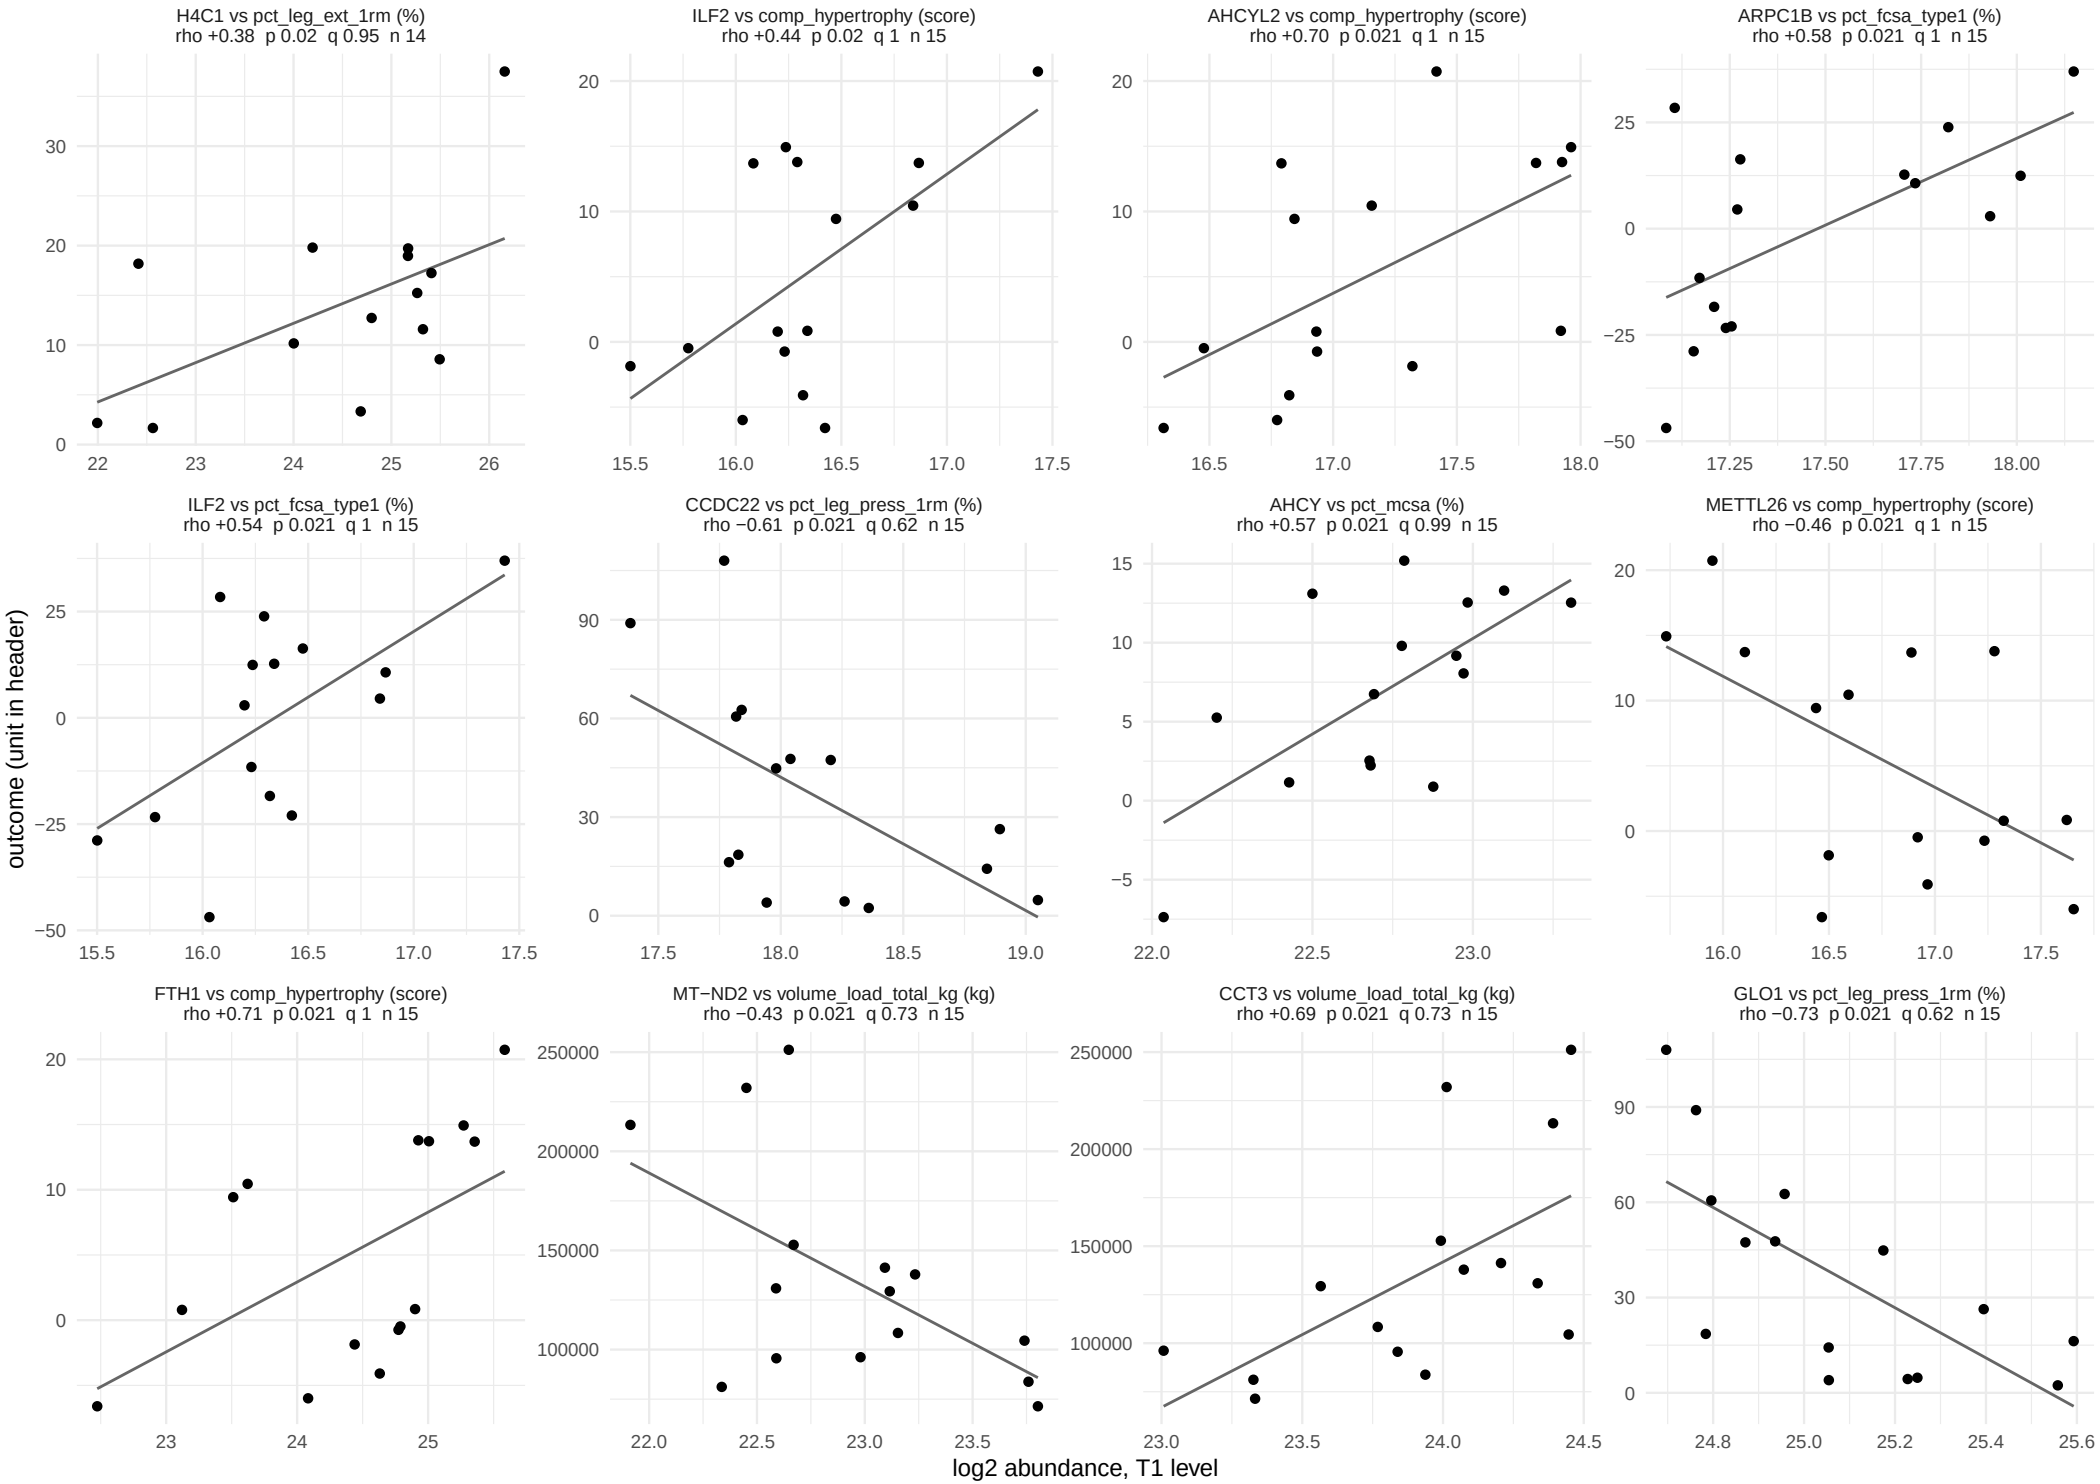

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline window


686 of 15200 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 21 of 58.

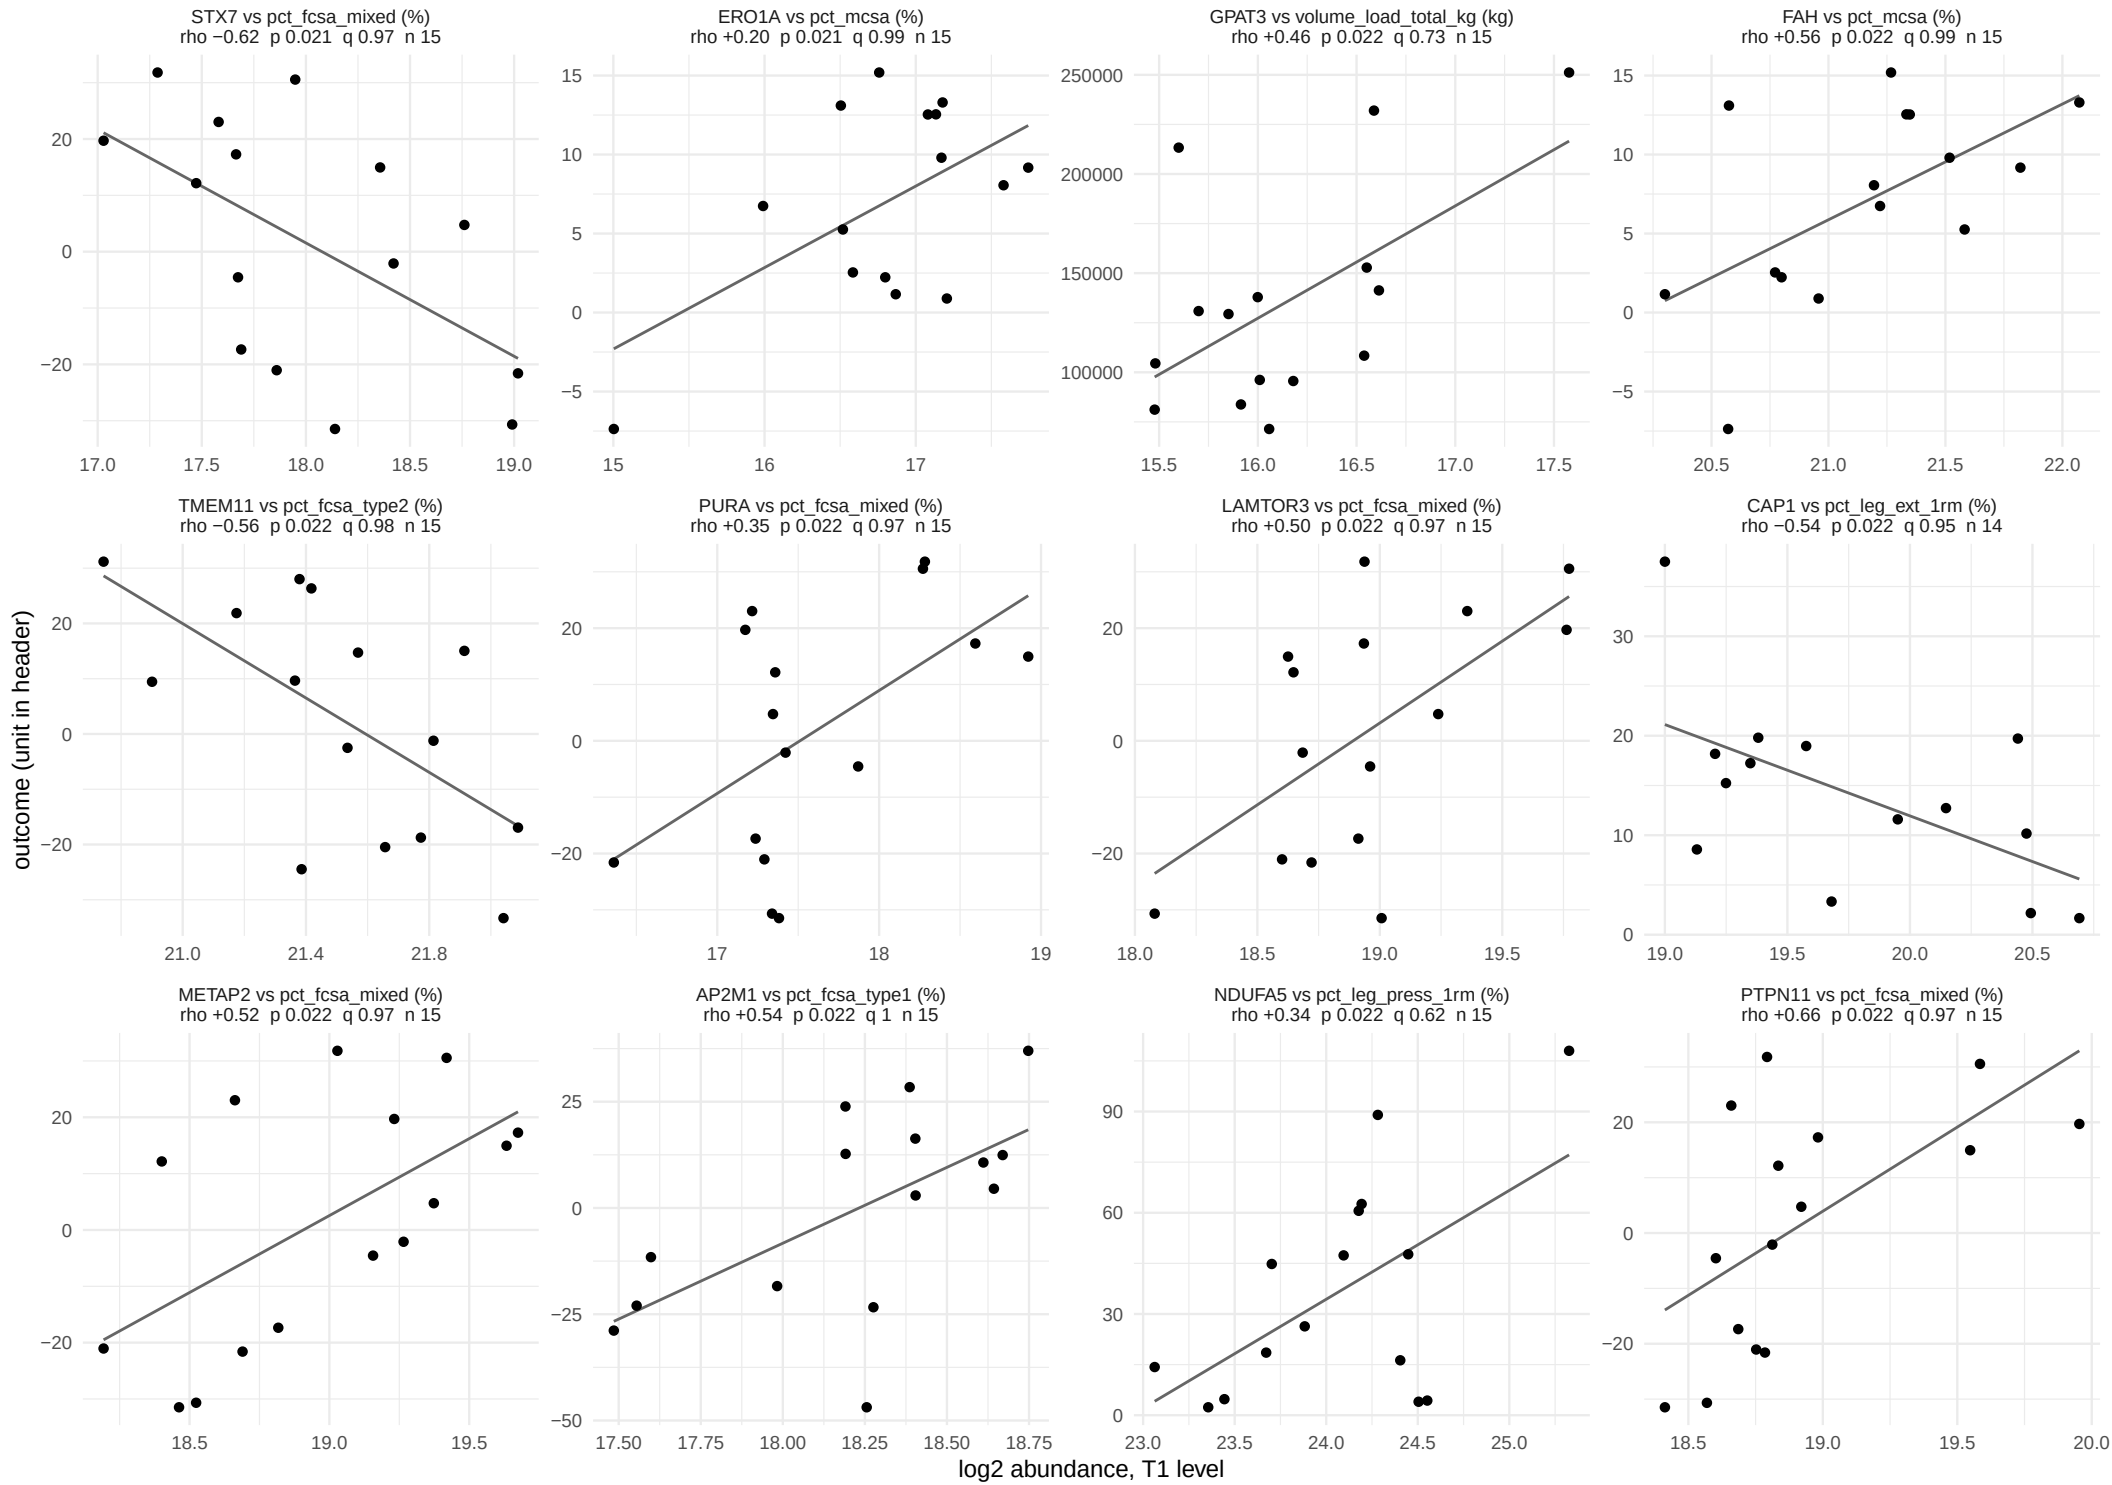

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline window


686 of 15200 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 22 of 58.

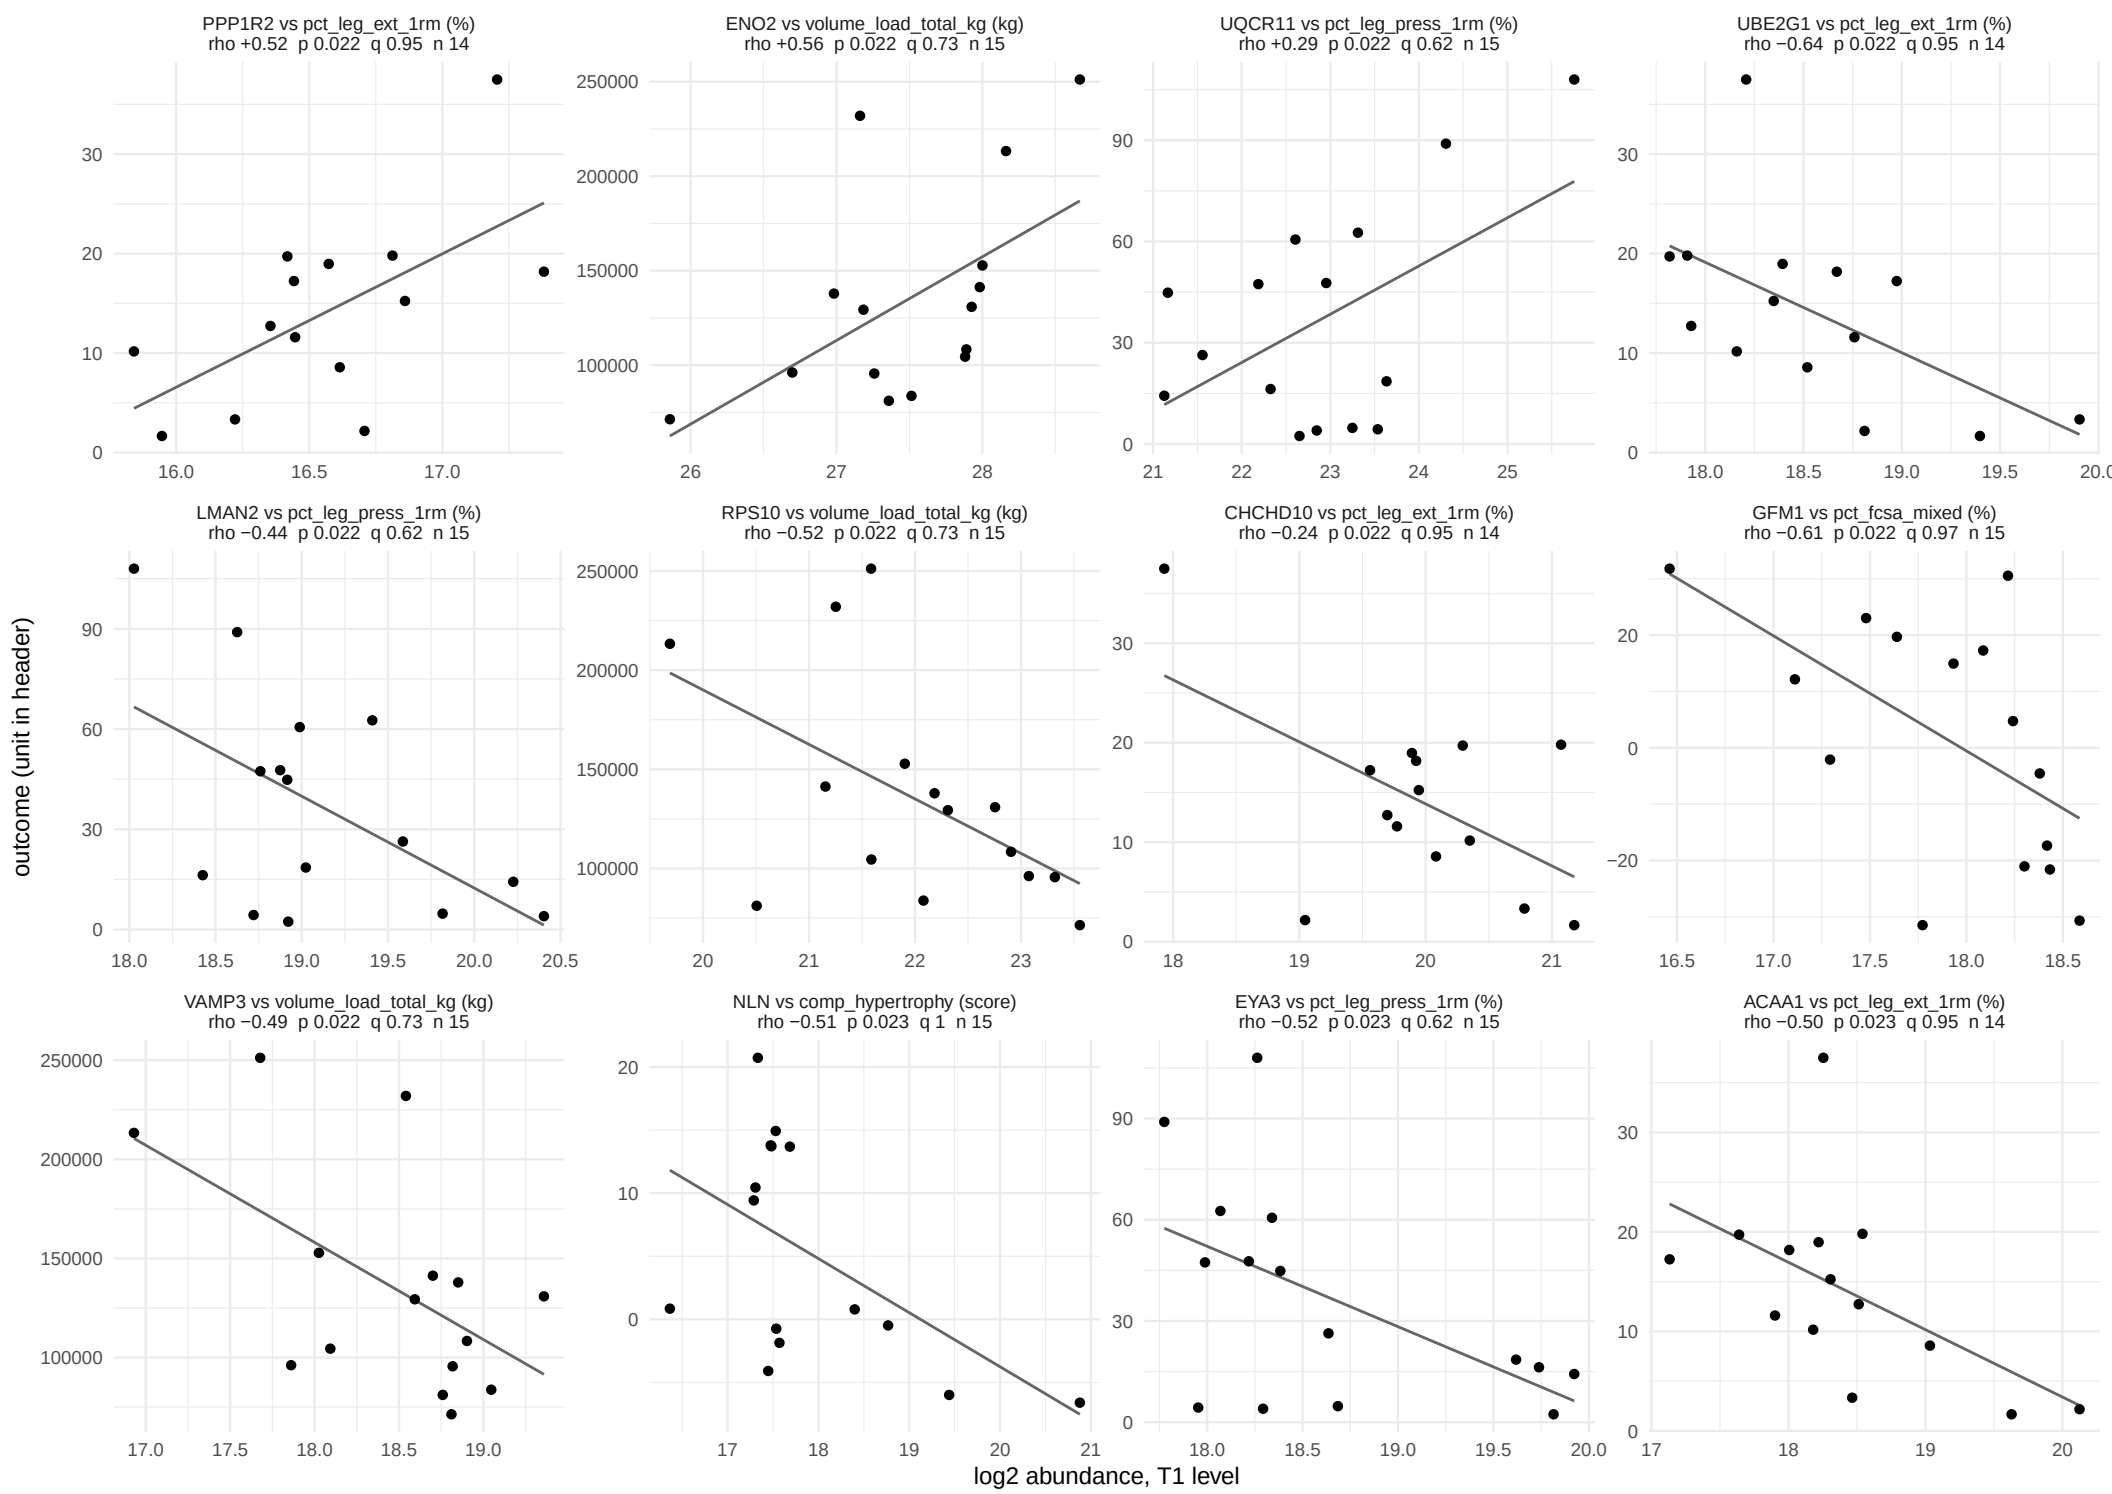

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline window


686 of 15200 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 23 of 58.

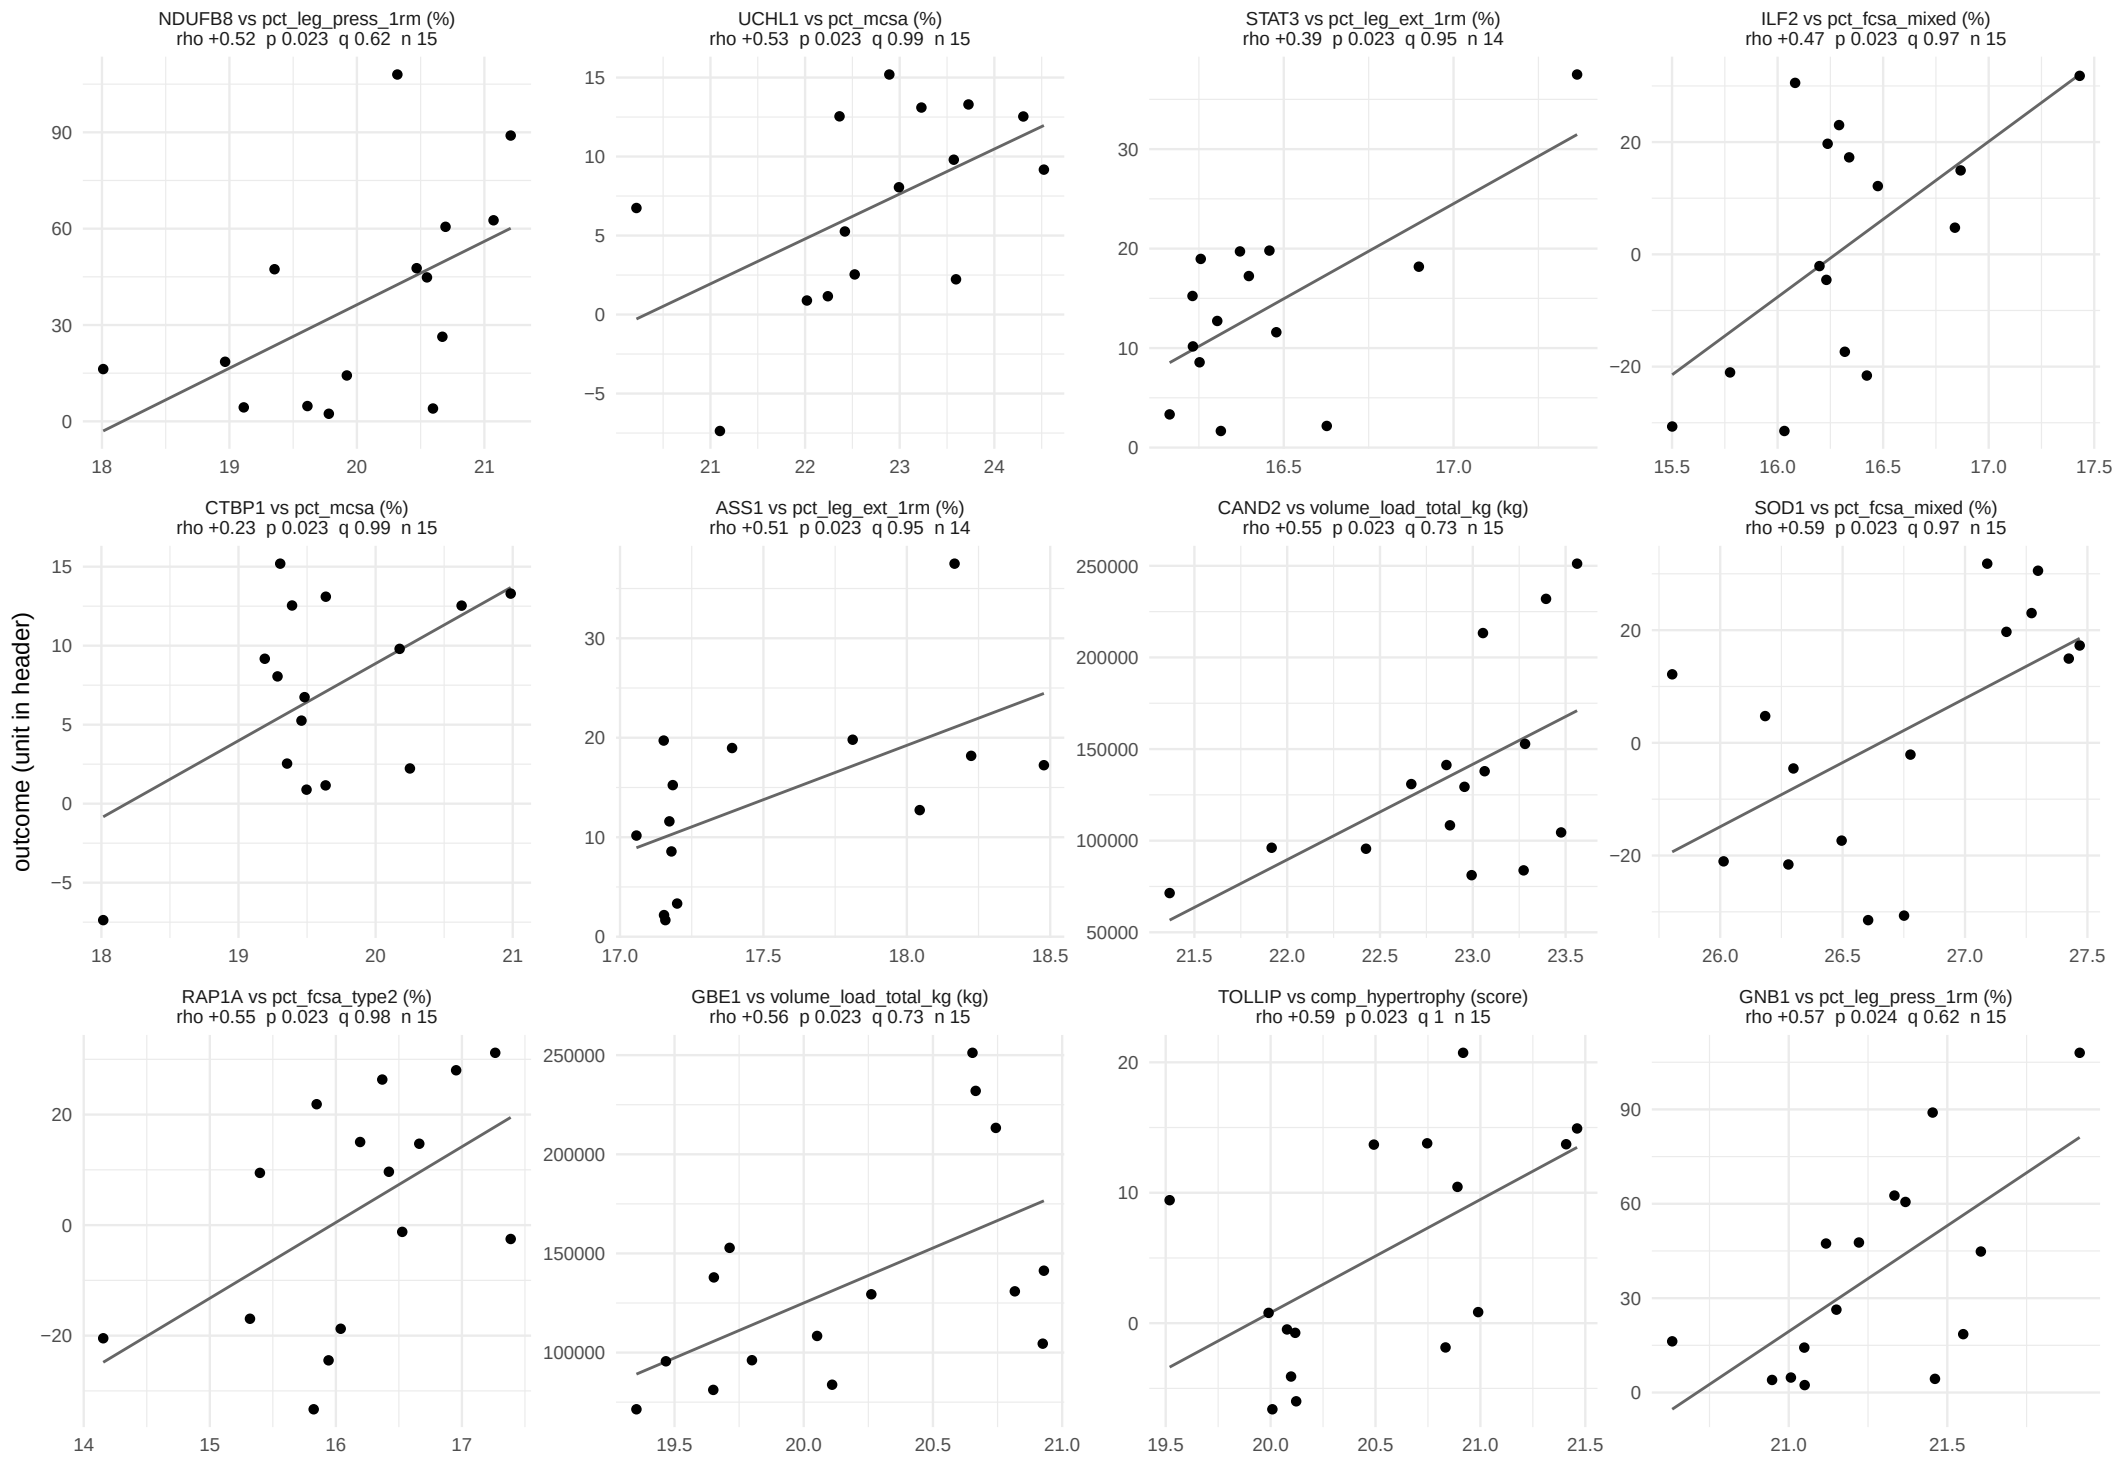

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline window


686 of 15200 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 24 of 58.

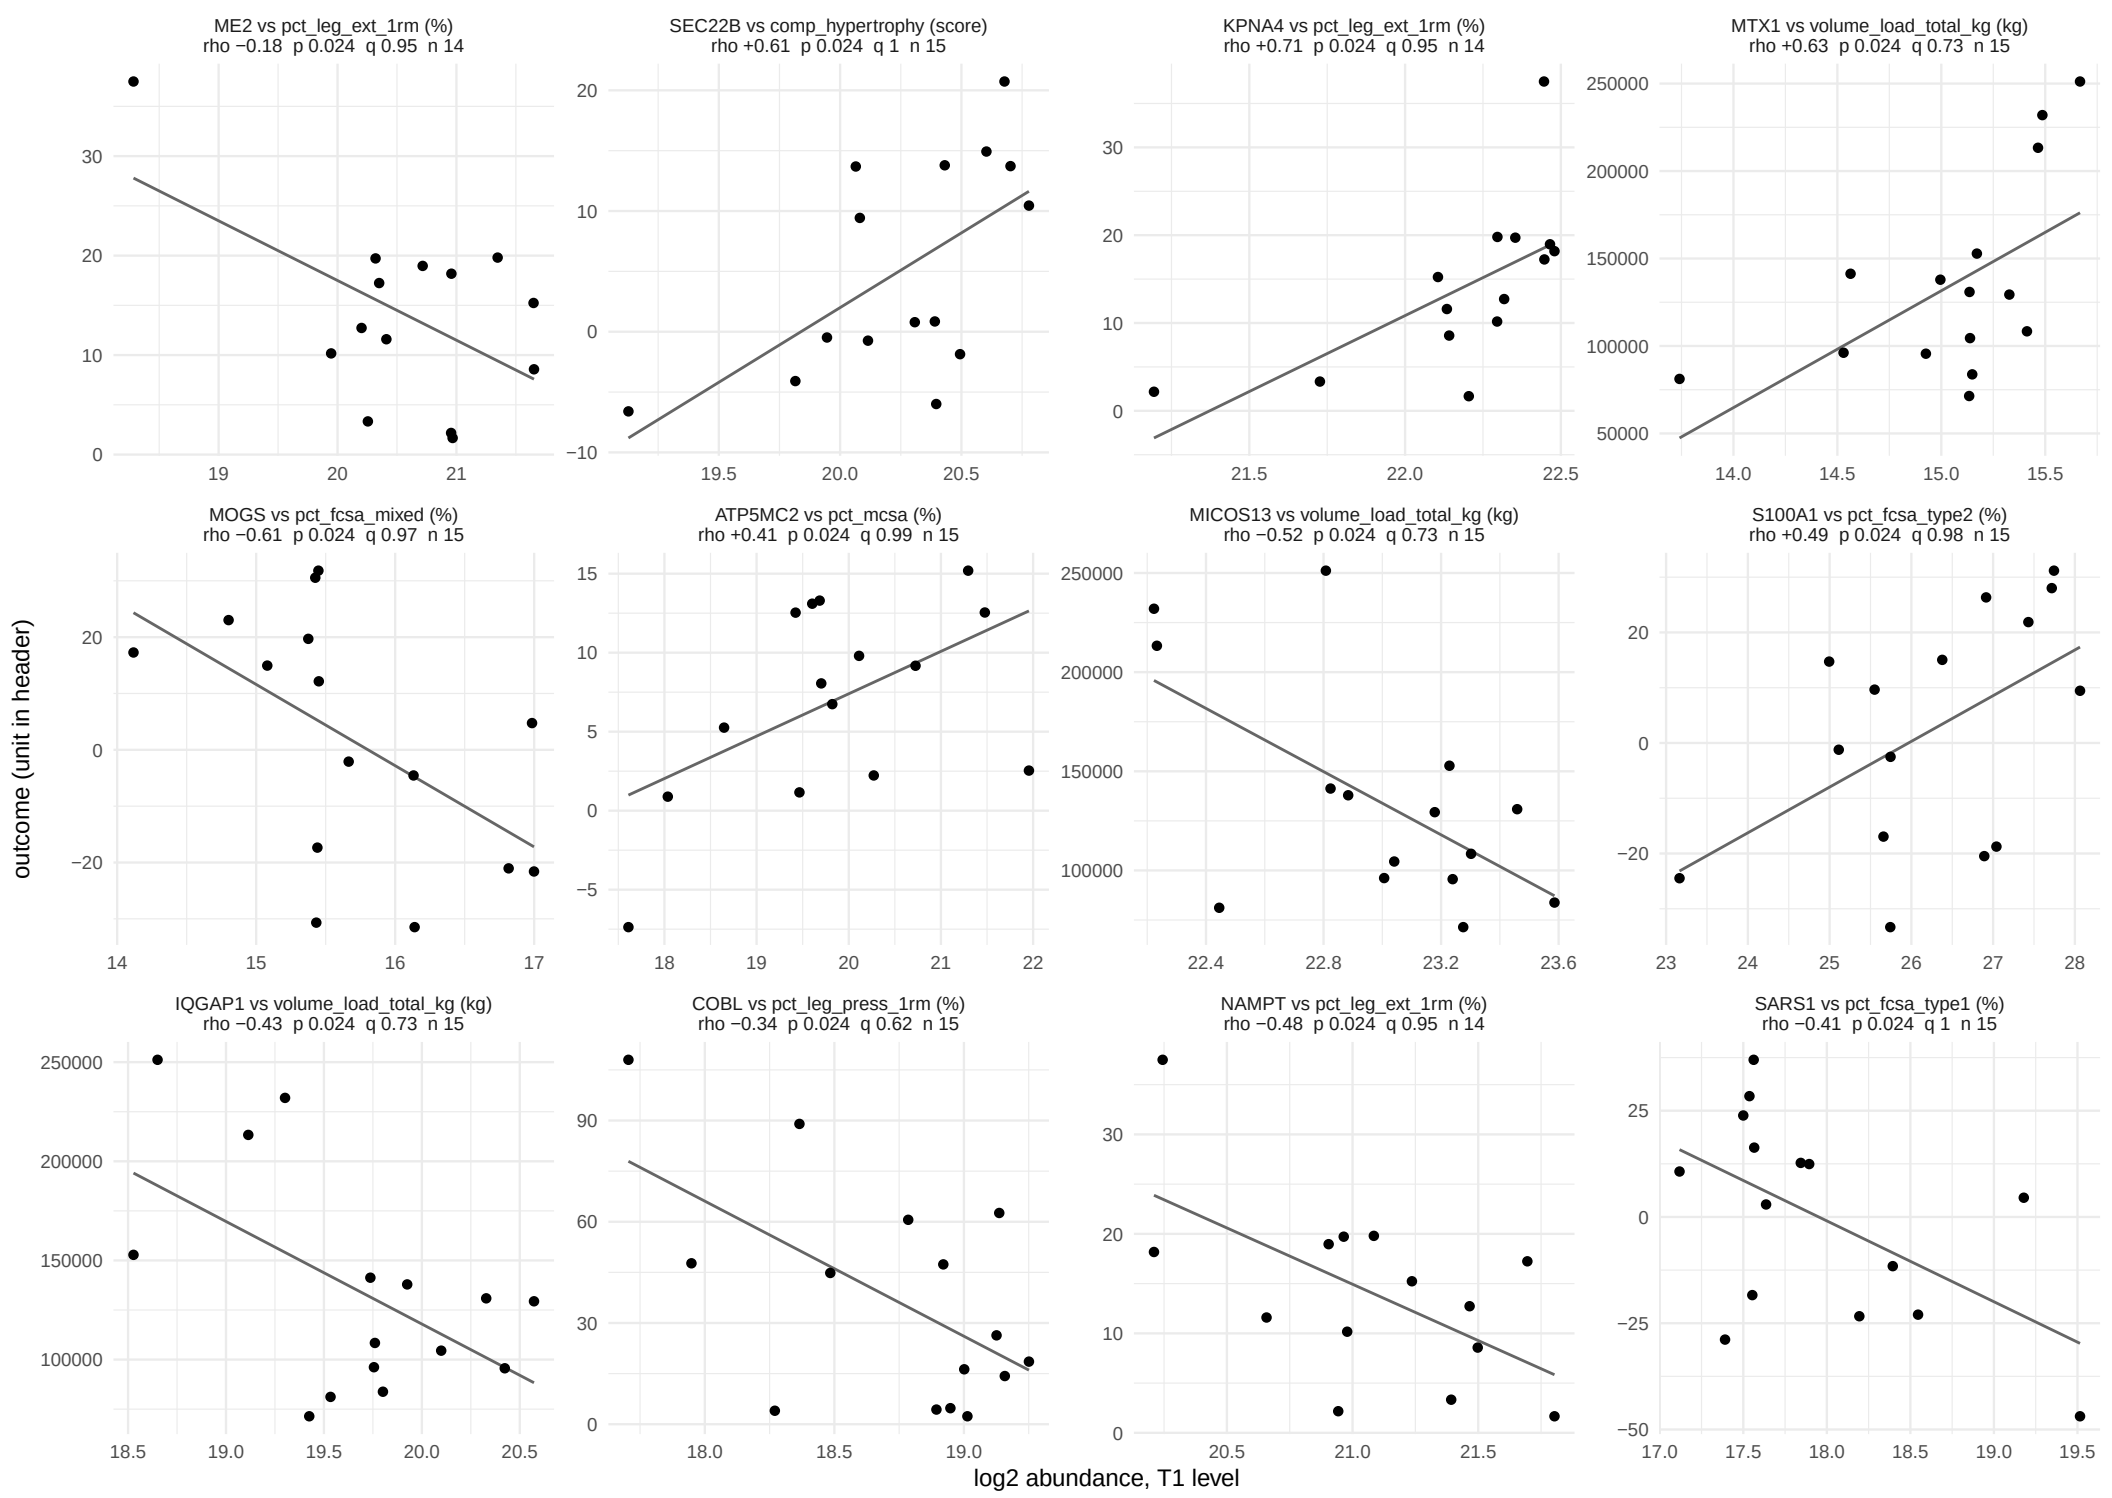

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline window


686 of 15200 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 25 of 58.

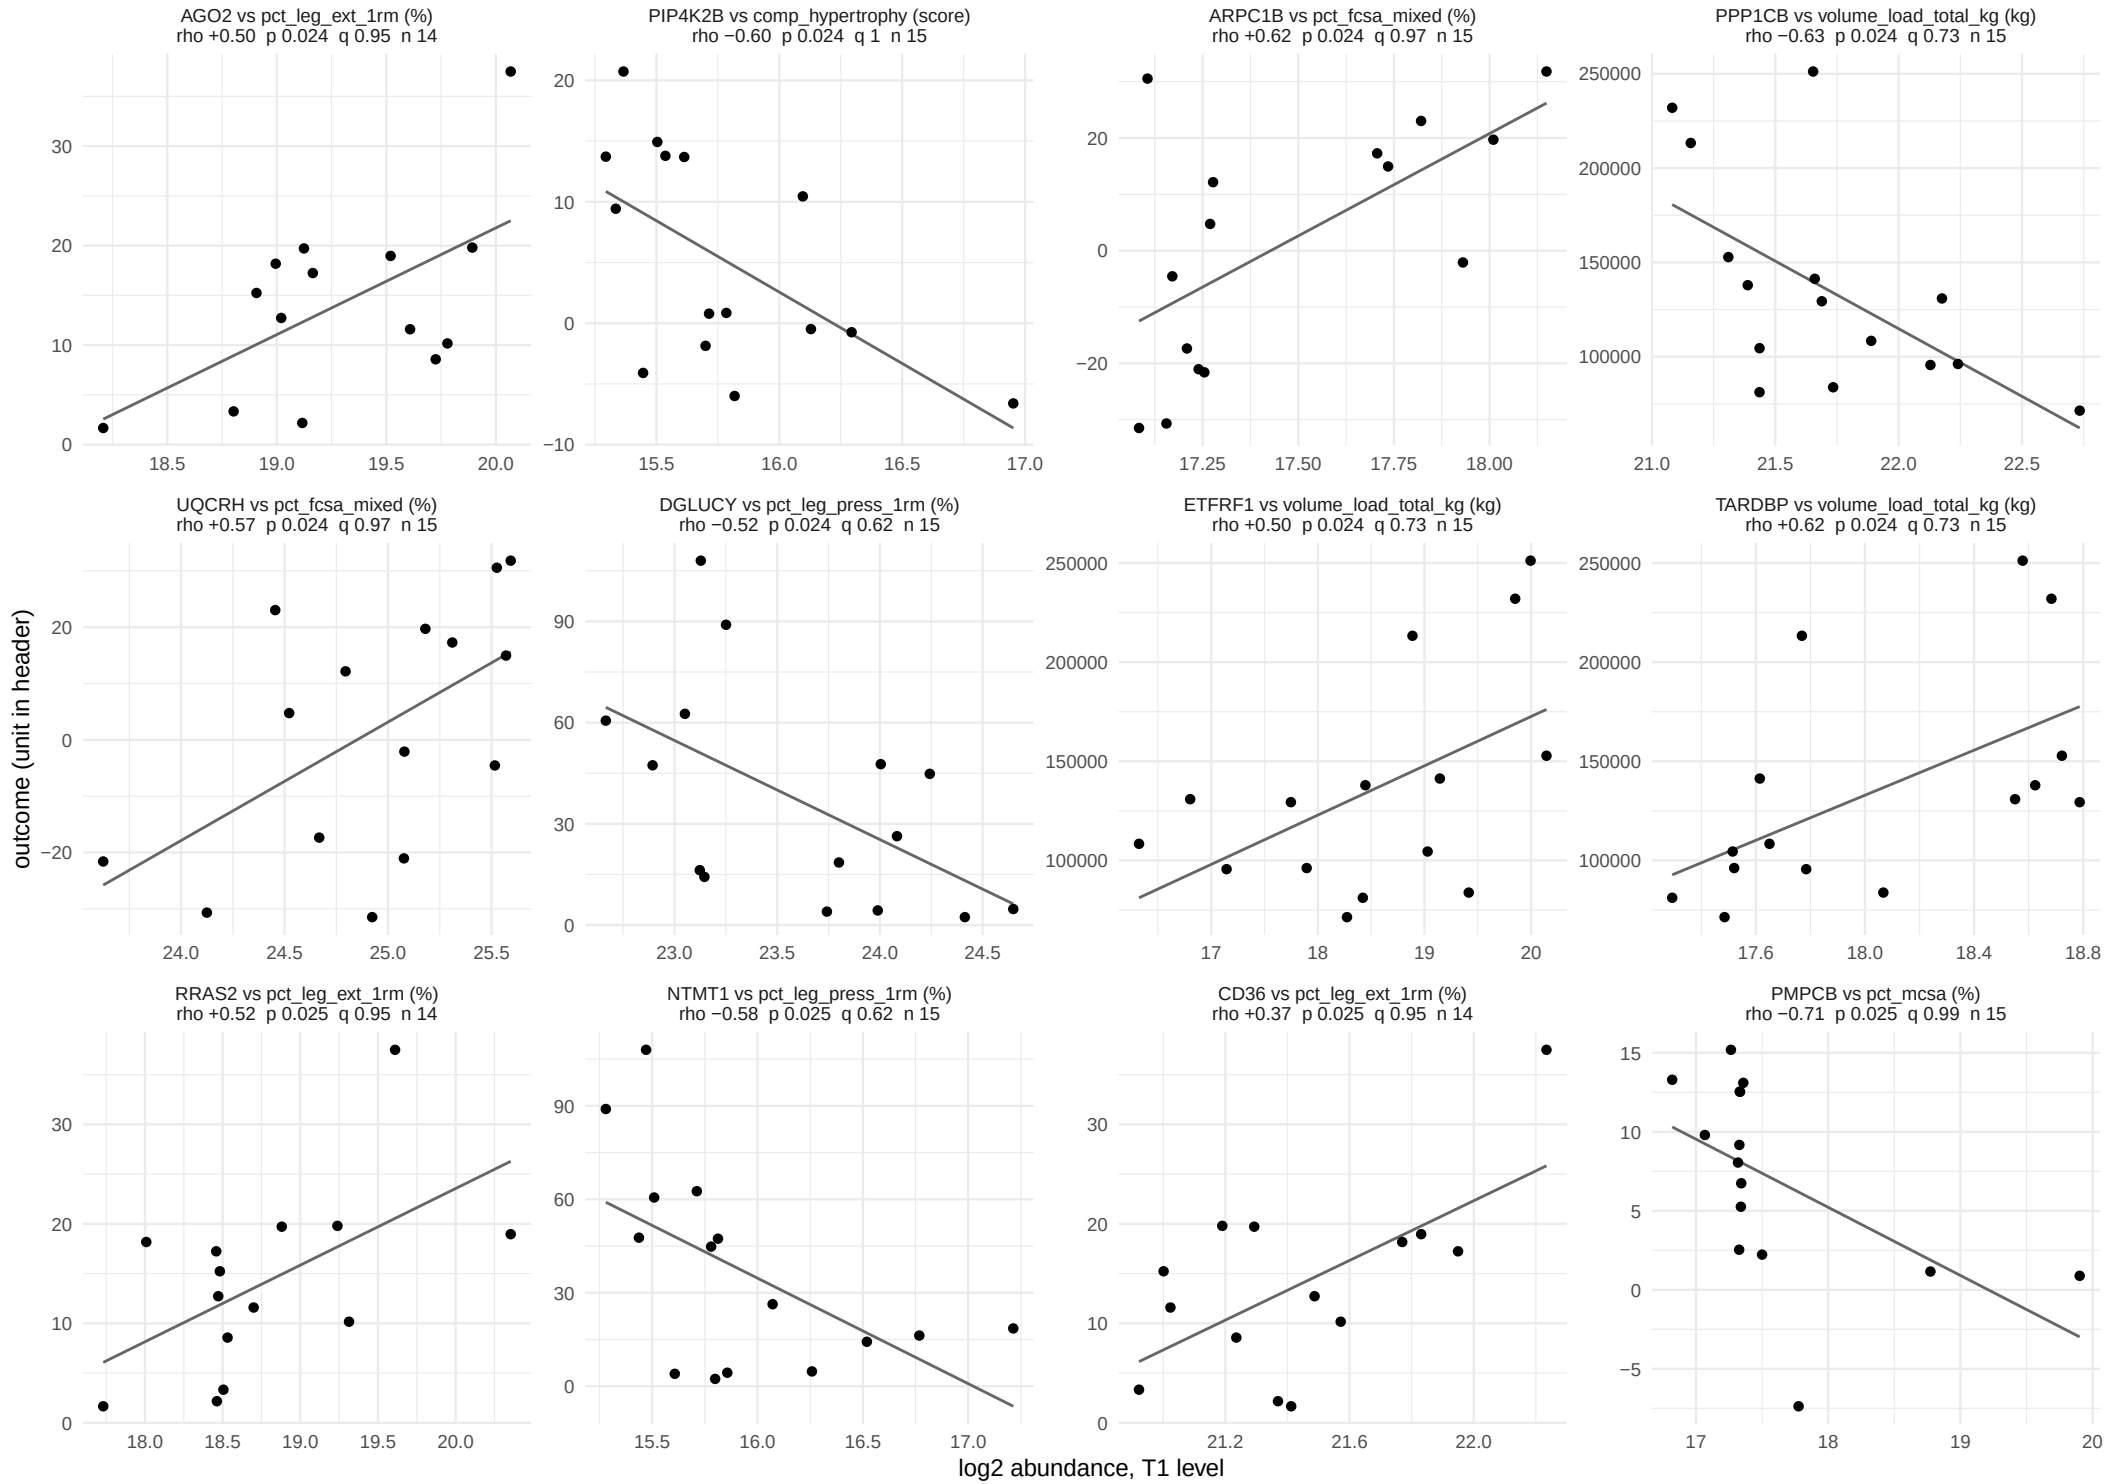

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline window


686 of 15200 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 26 of 58.

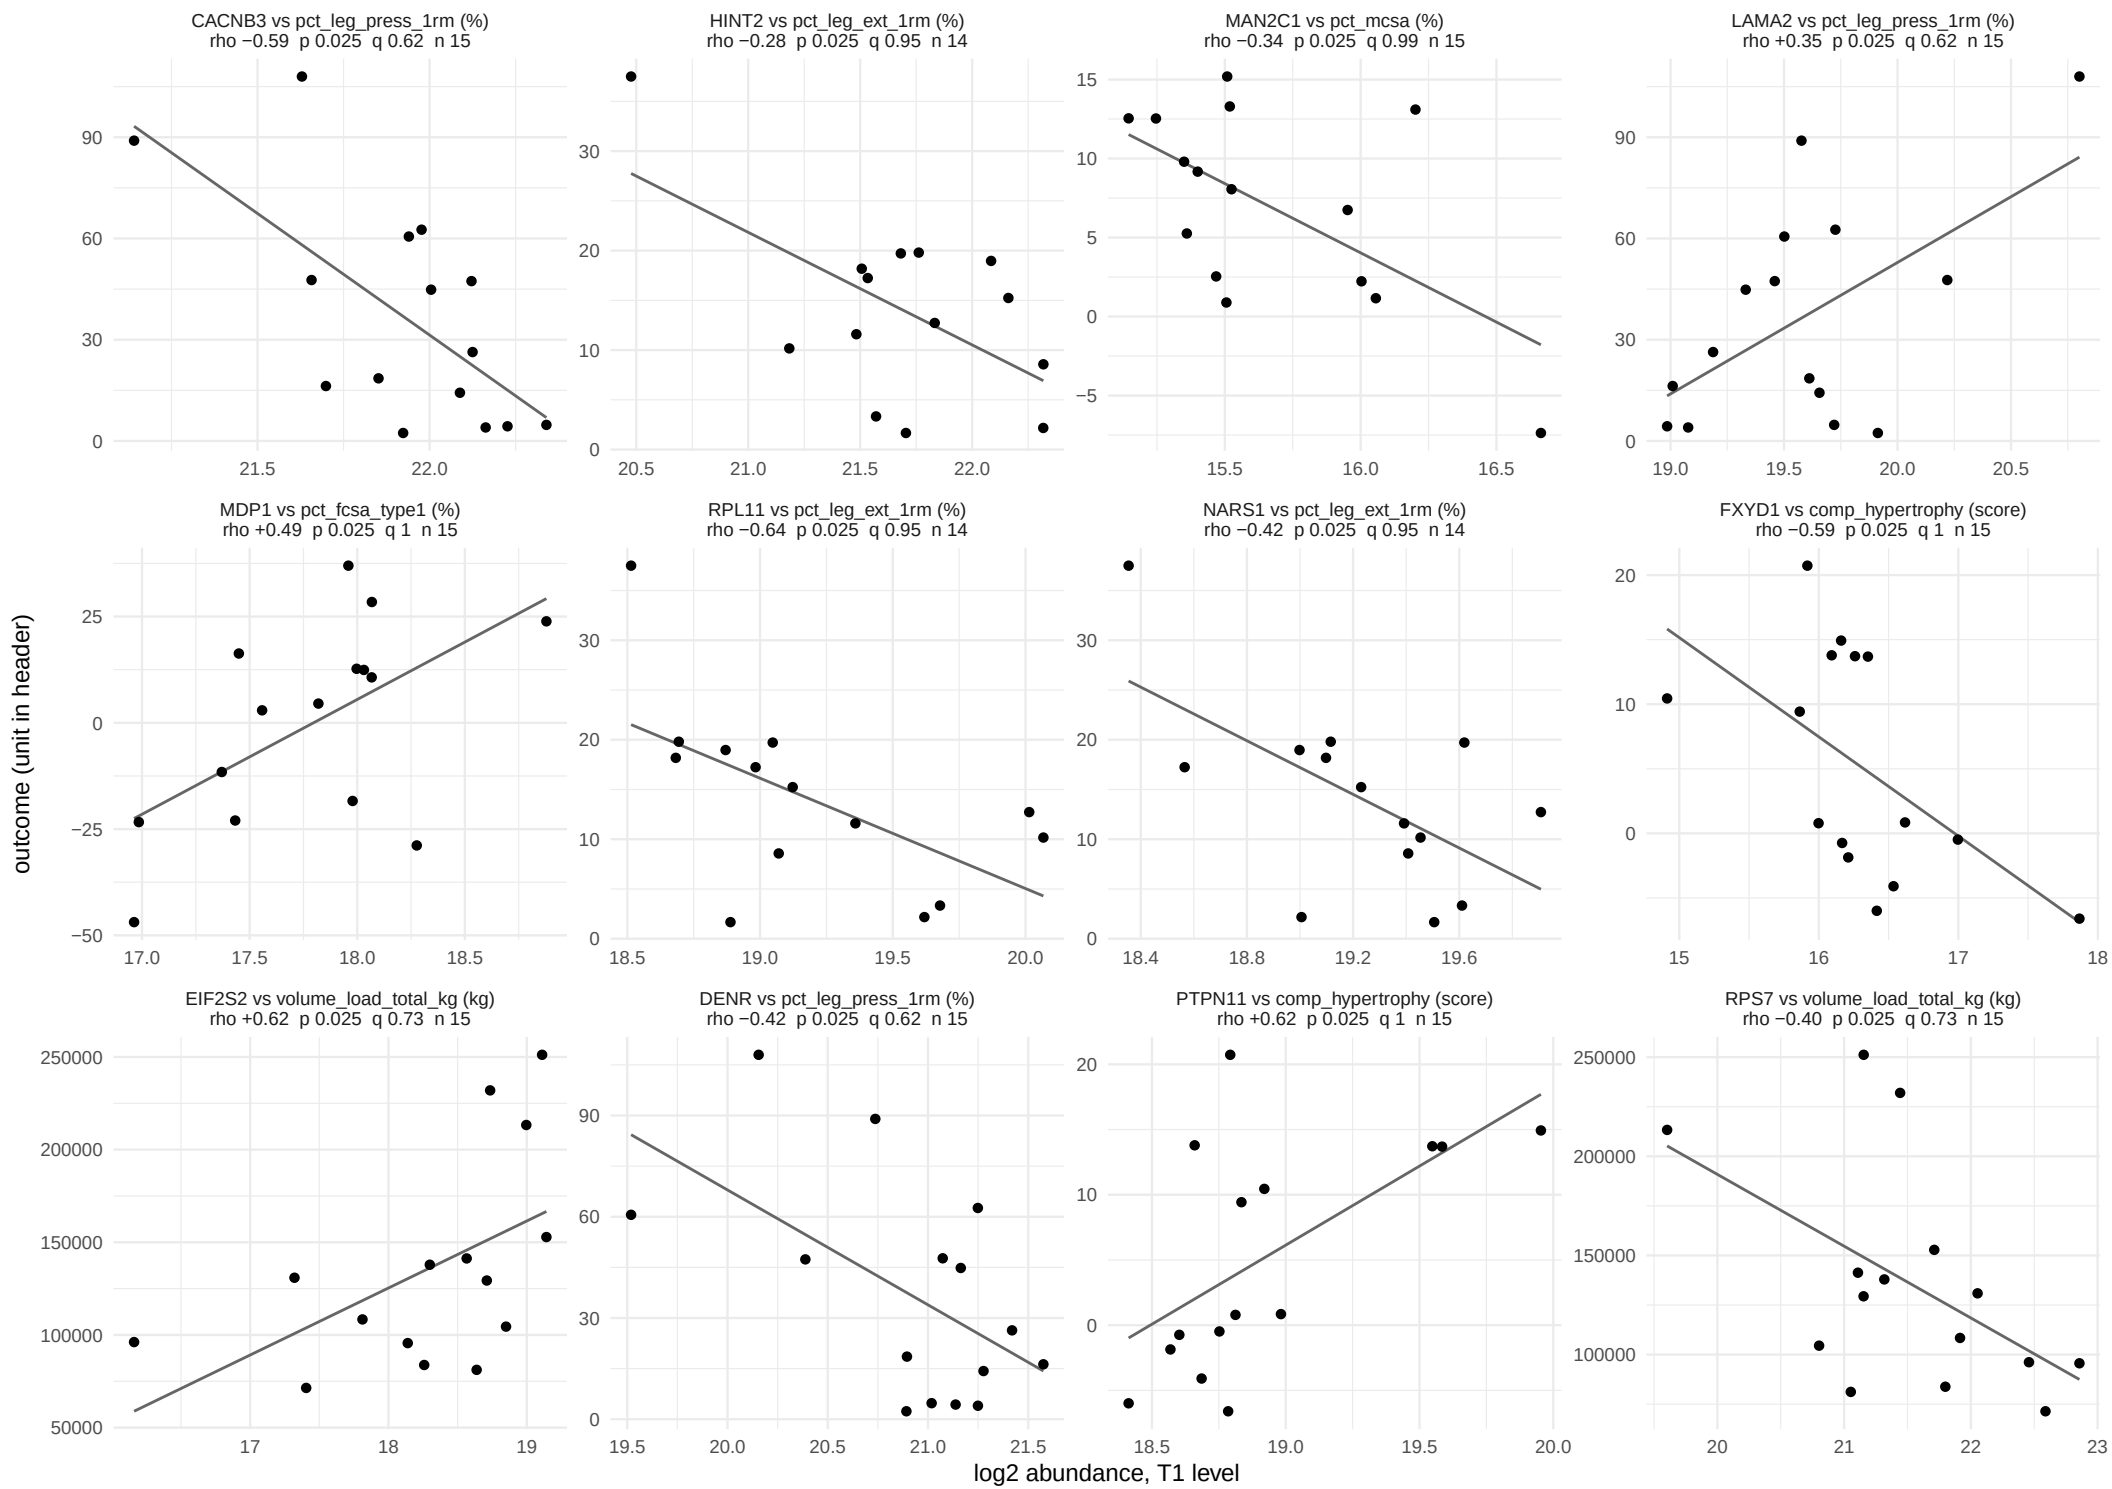

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline window


686 of 15200 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 27 of 58.

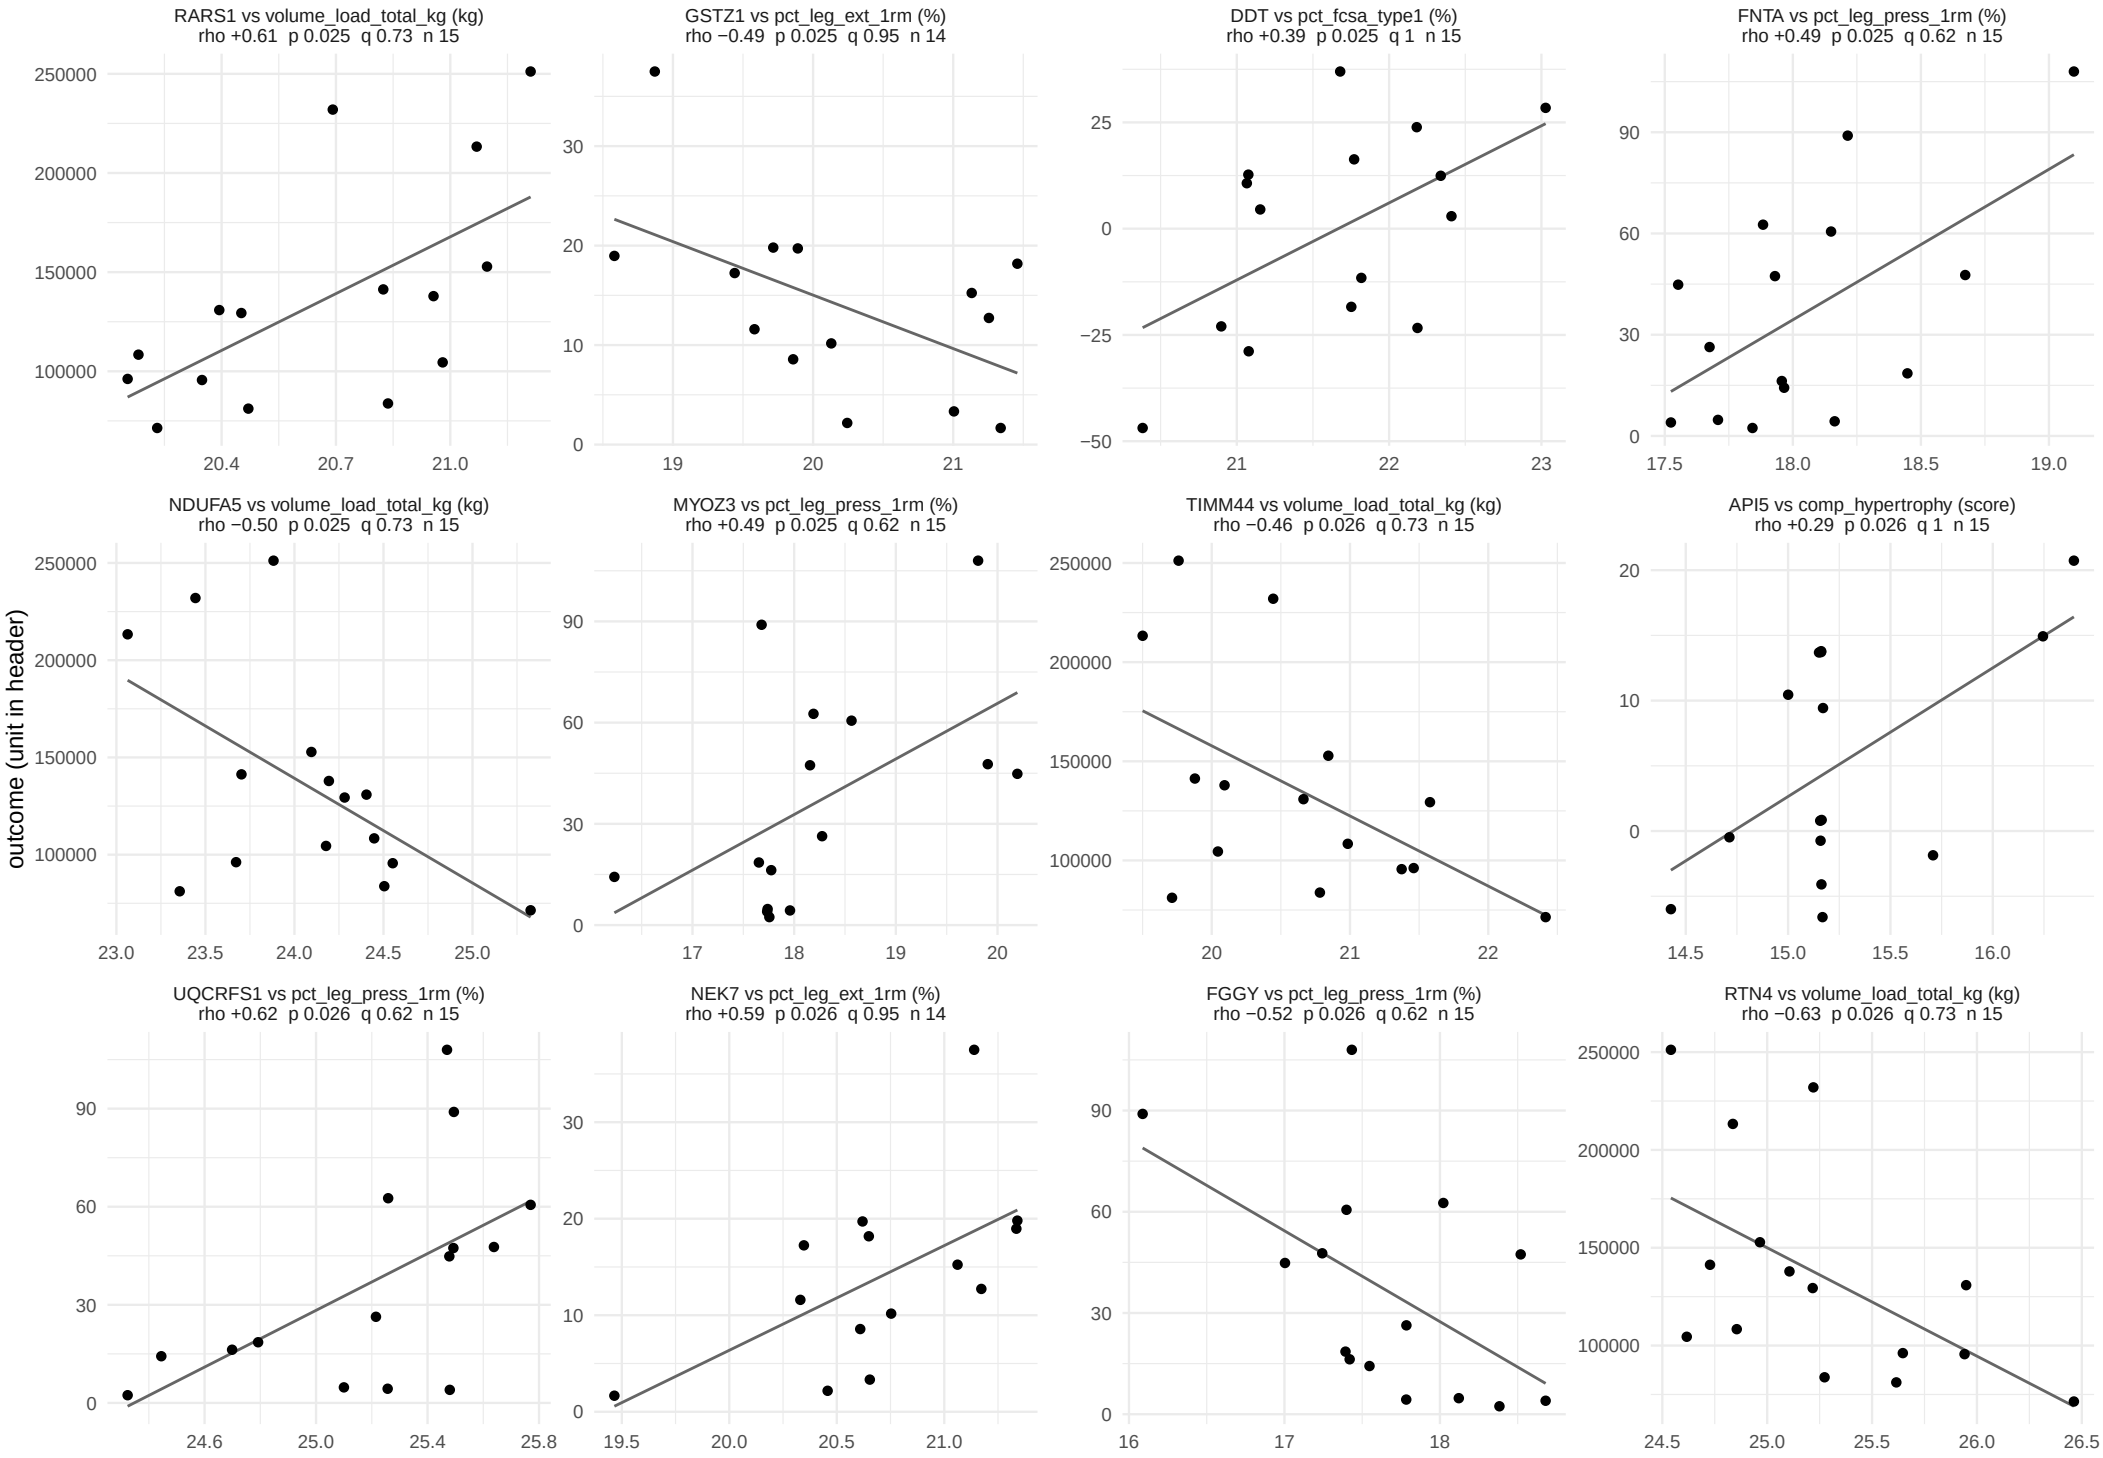

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline window


686 of 15200 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 28 of 58.

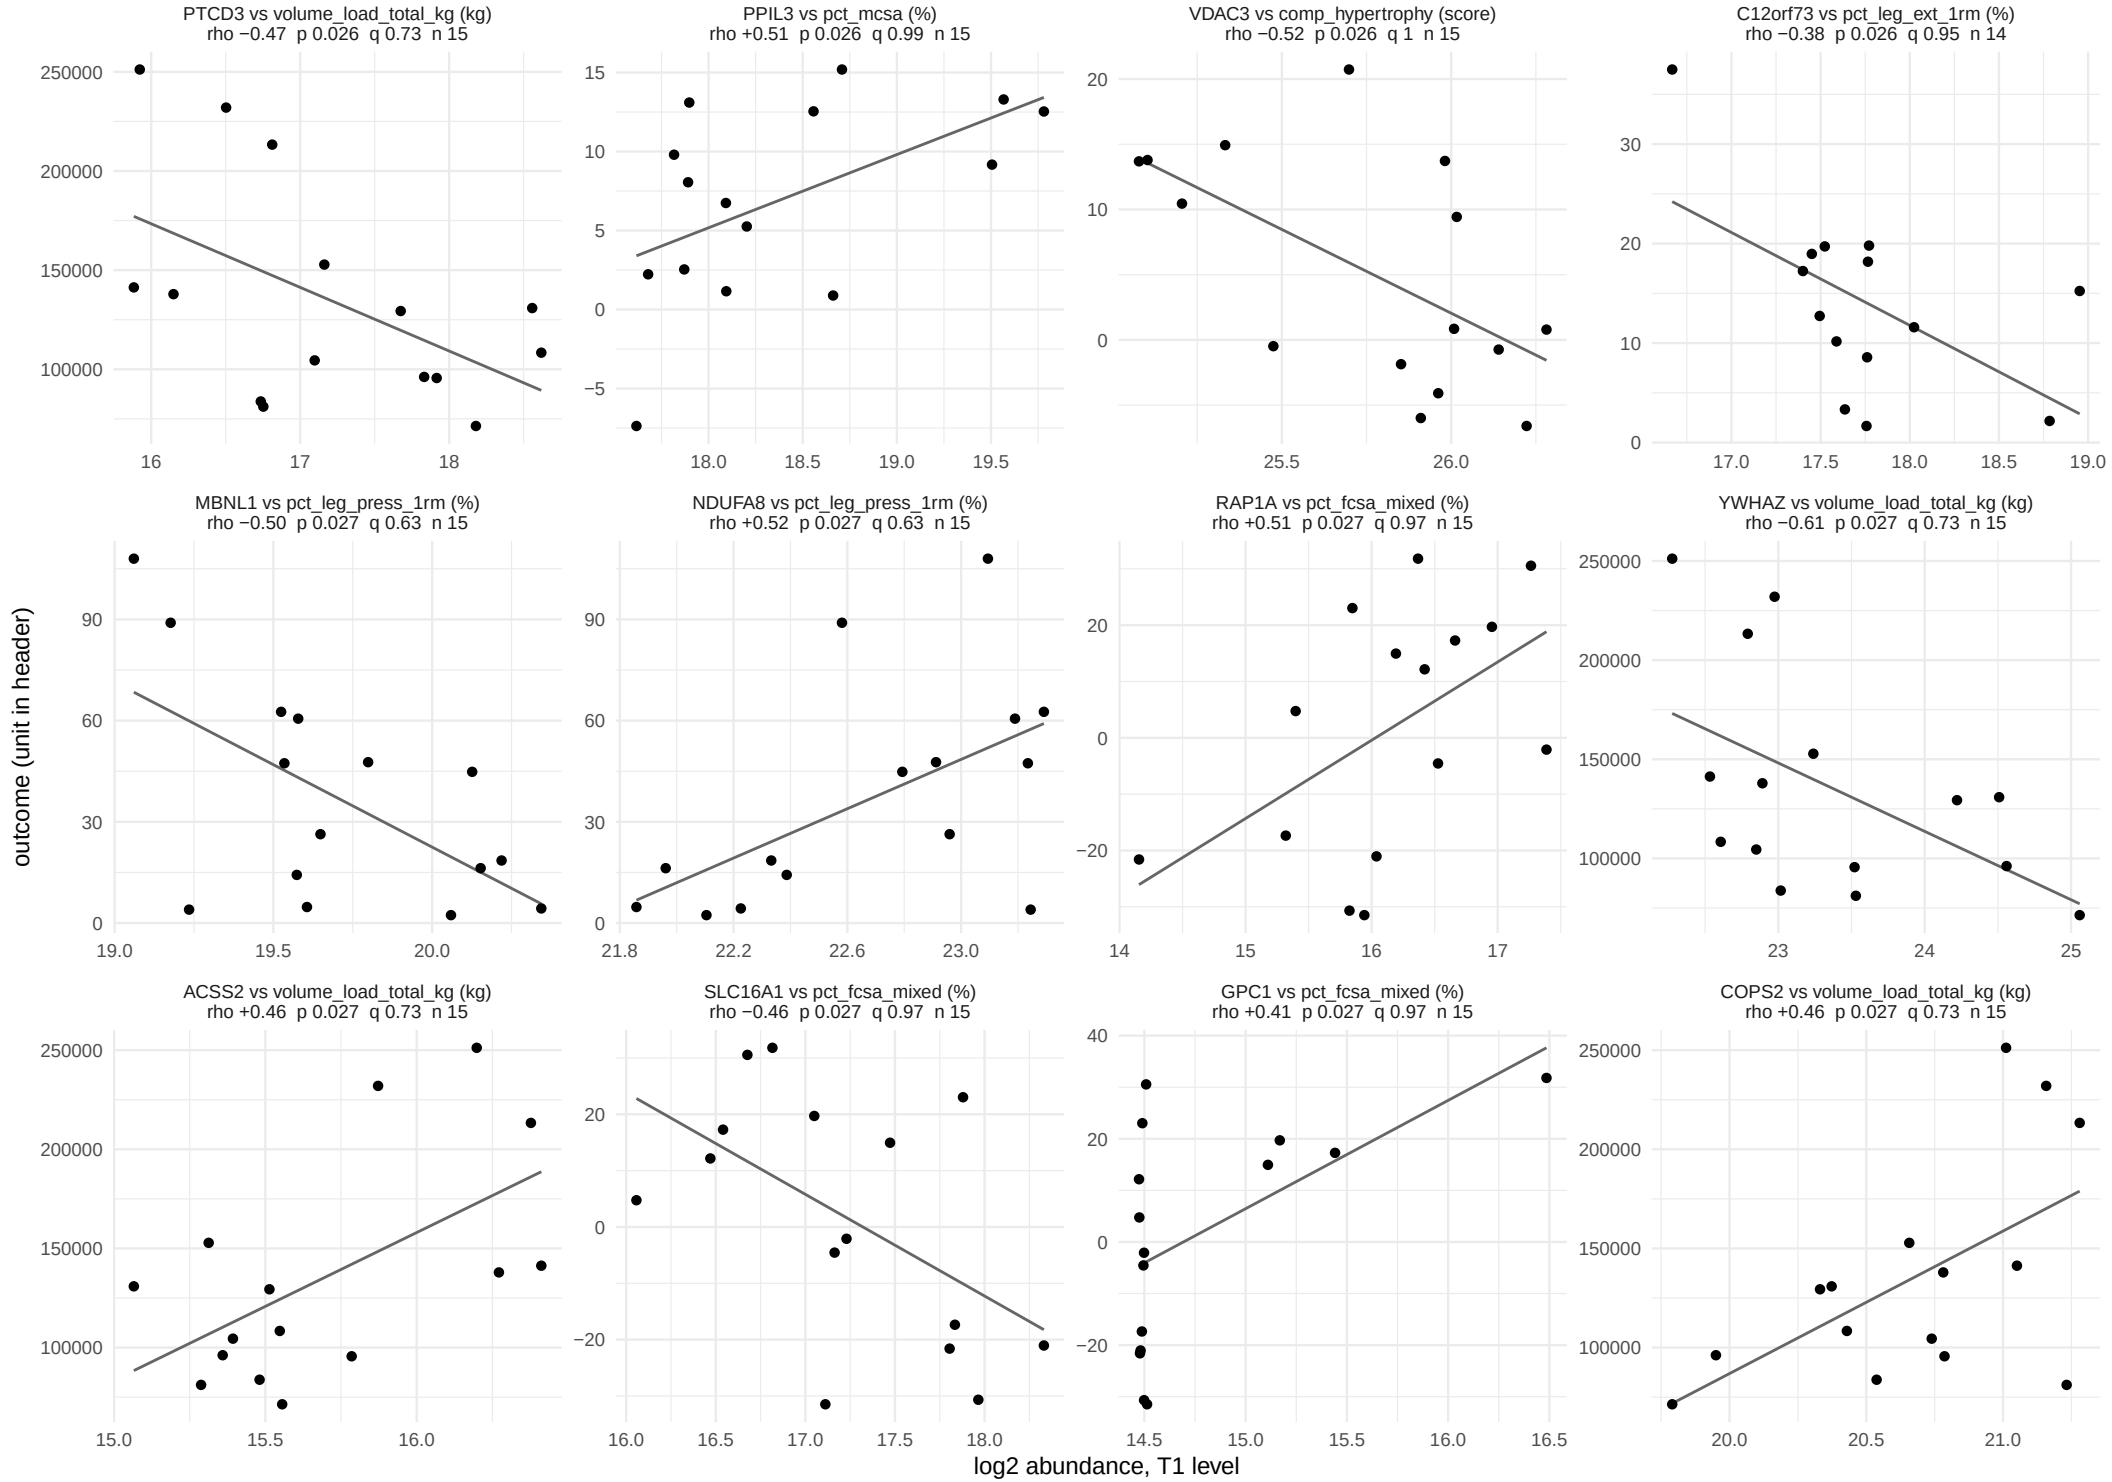

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline window


686 of 15200 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 29 of 58.

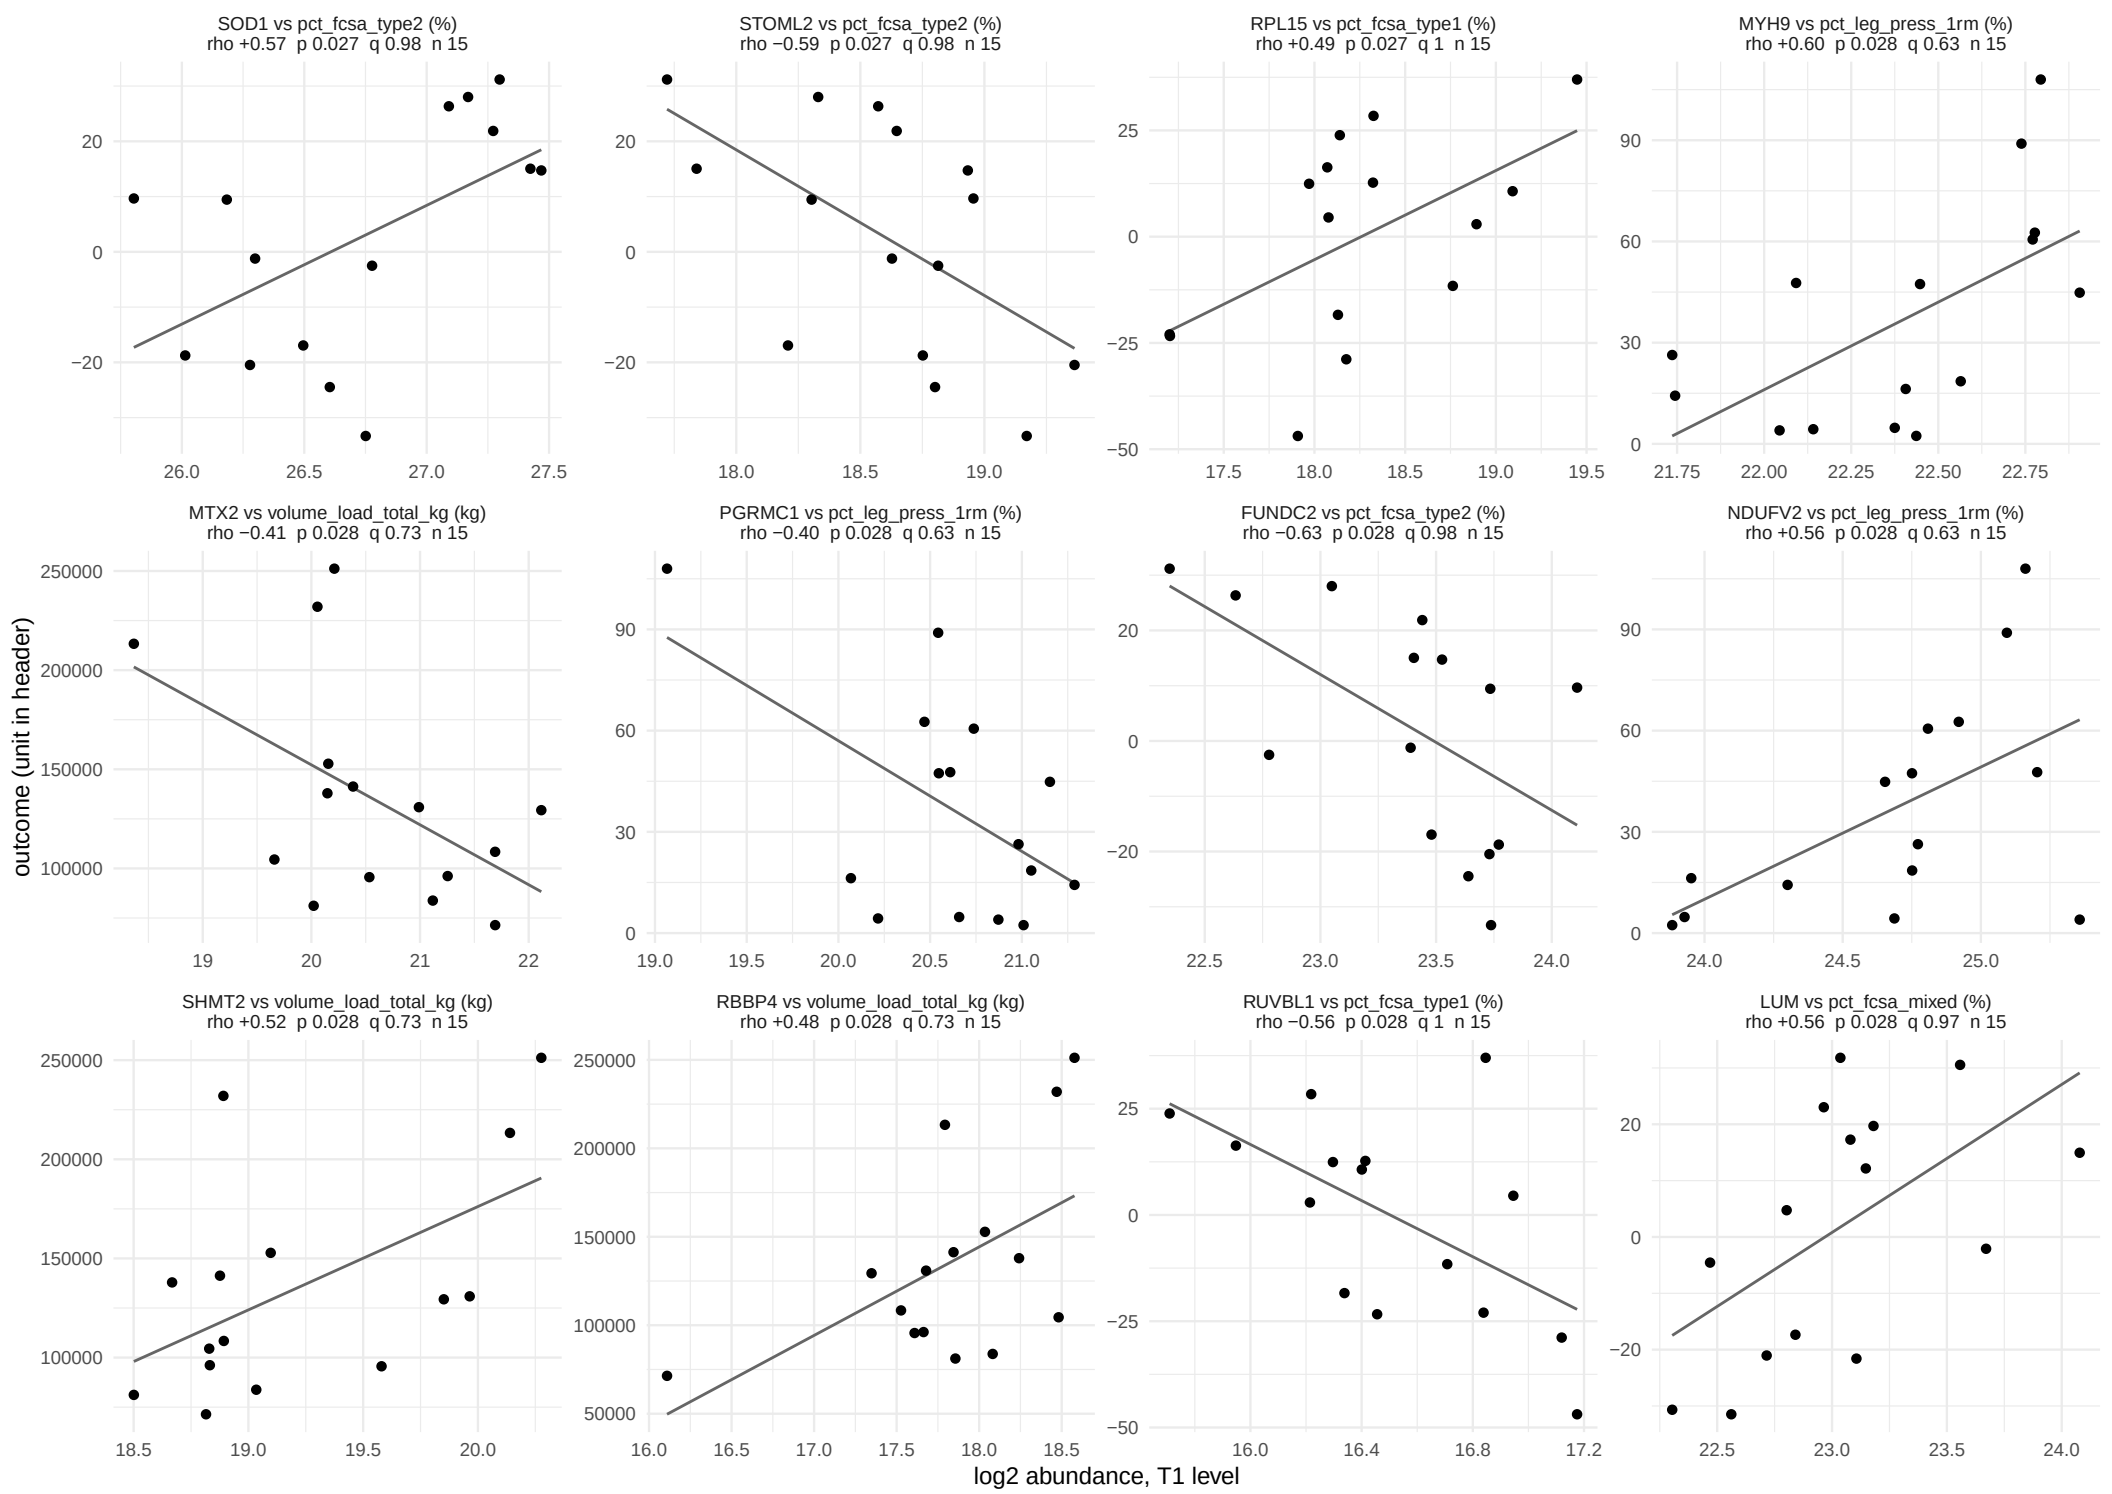

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline window


686 of 15200 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 30 of 58.

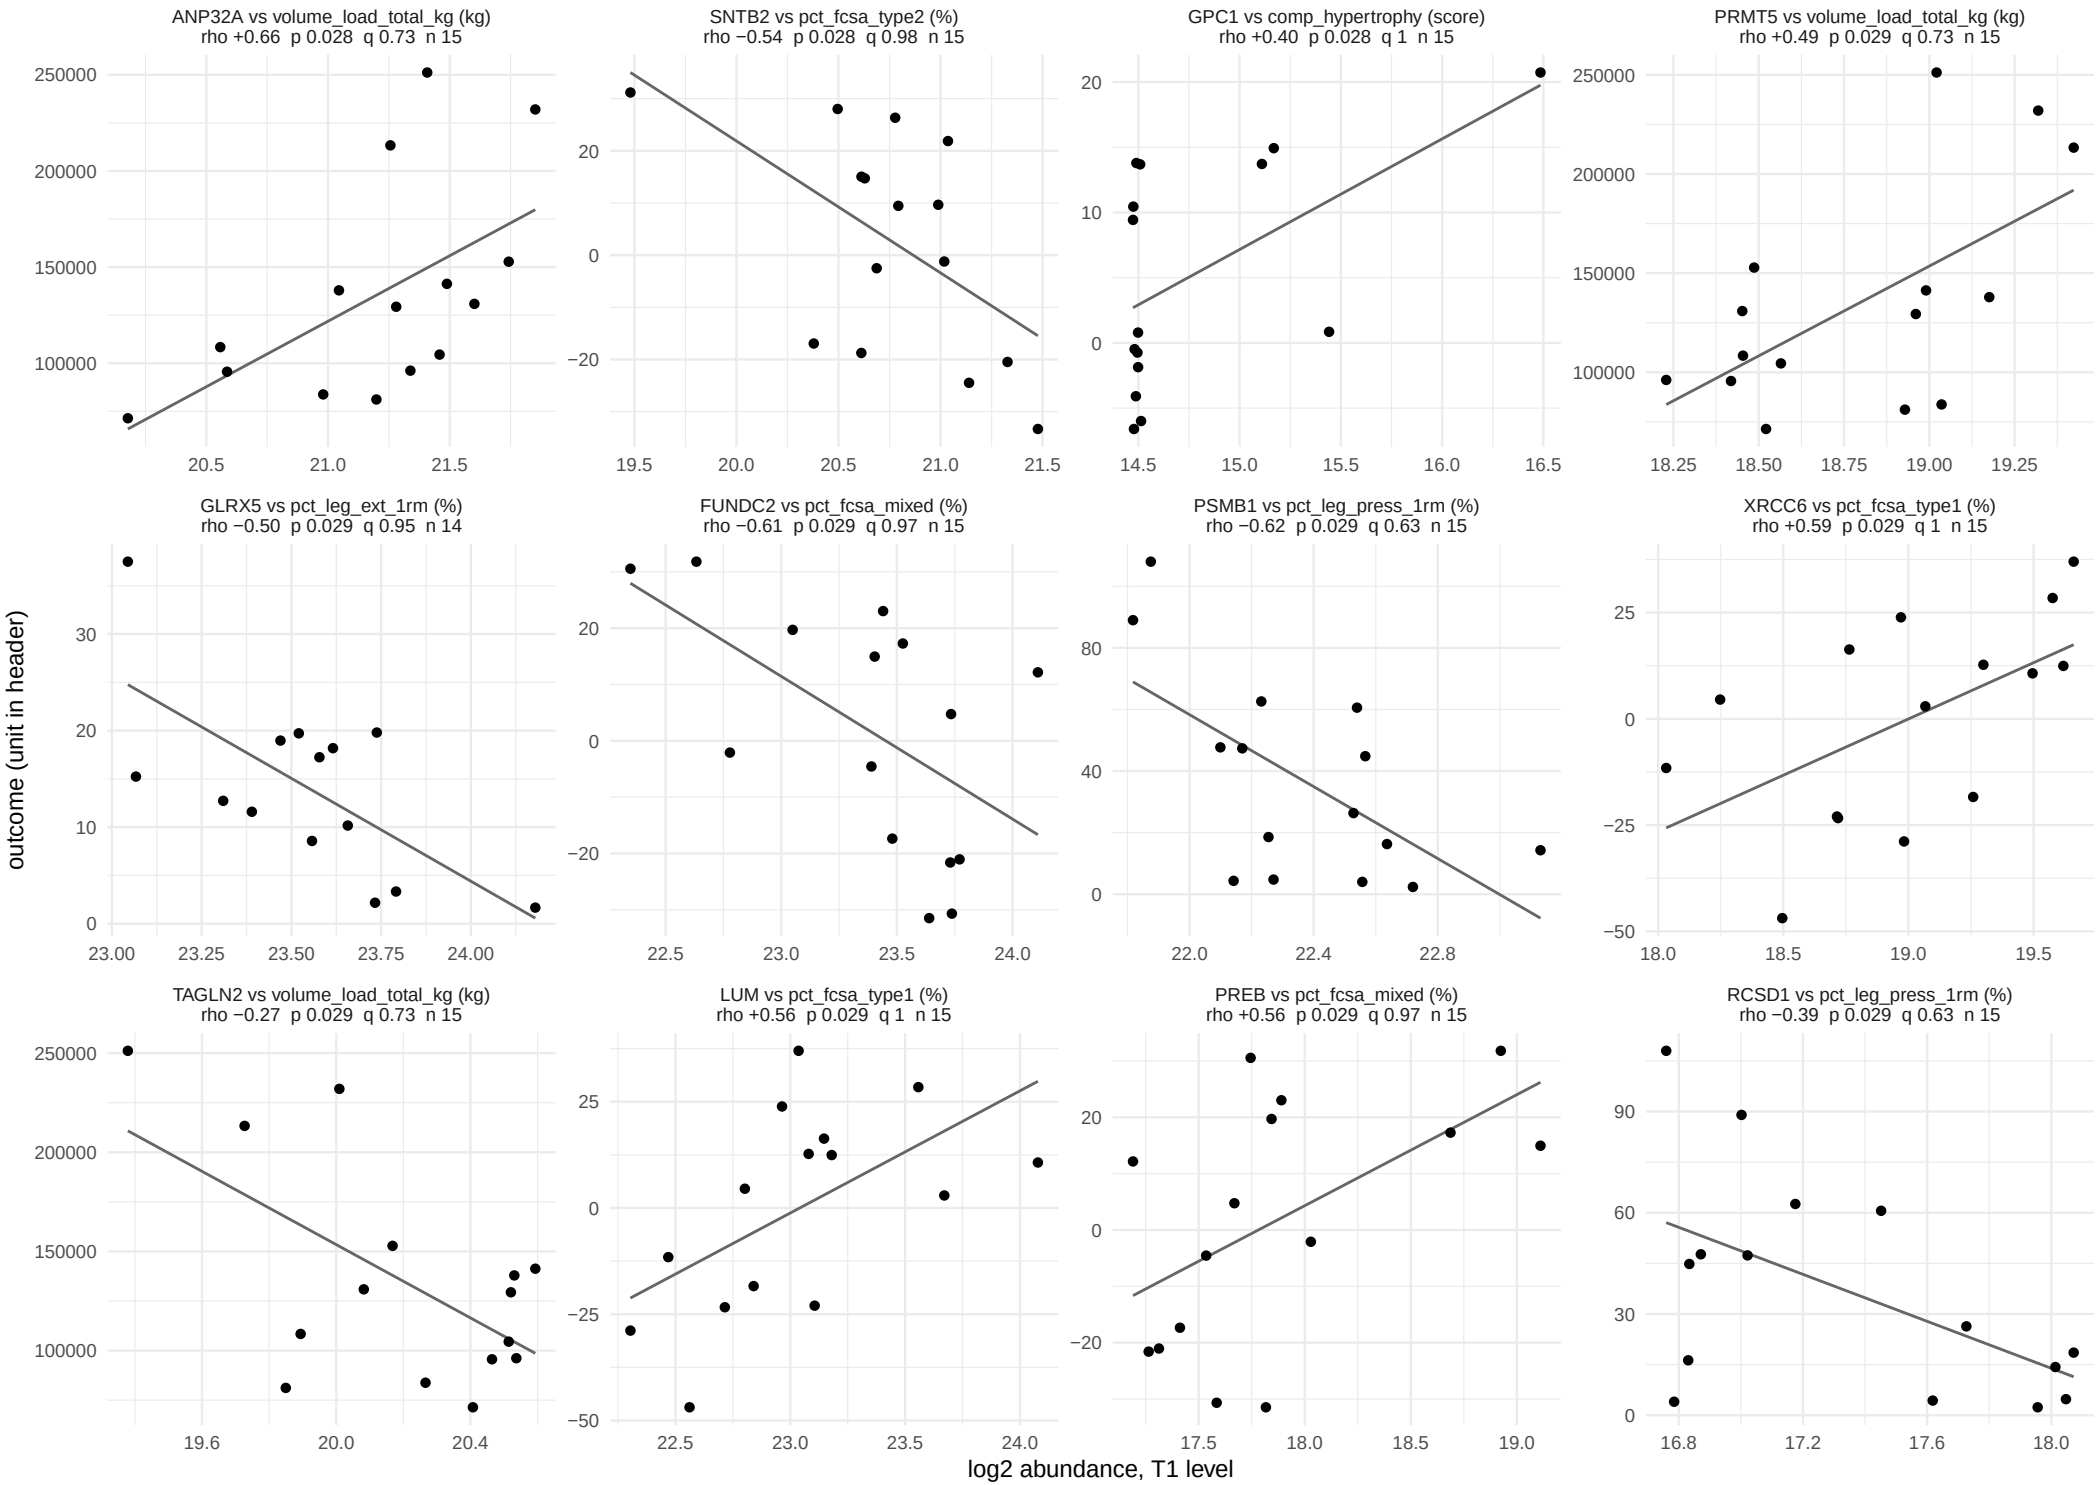

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline window


686 of 15200 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 31 of 58.

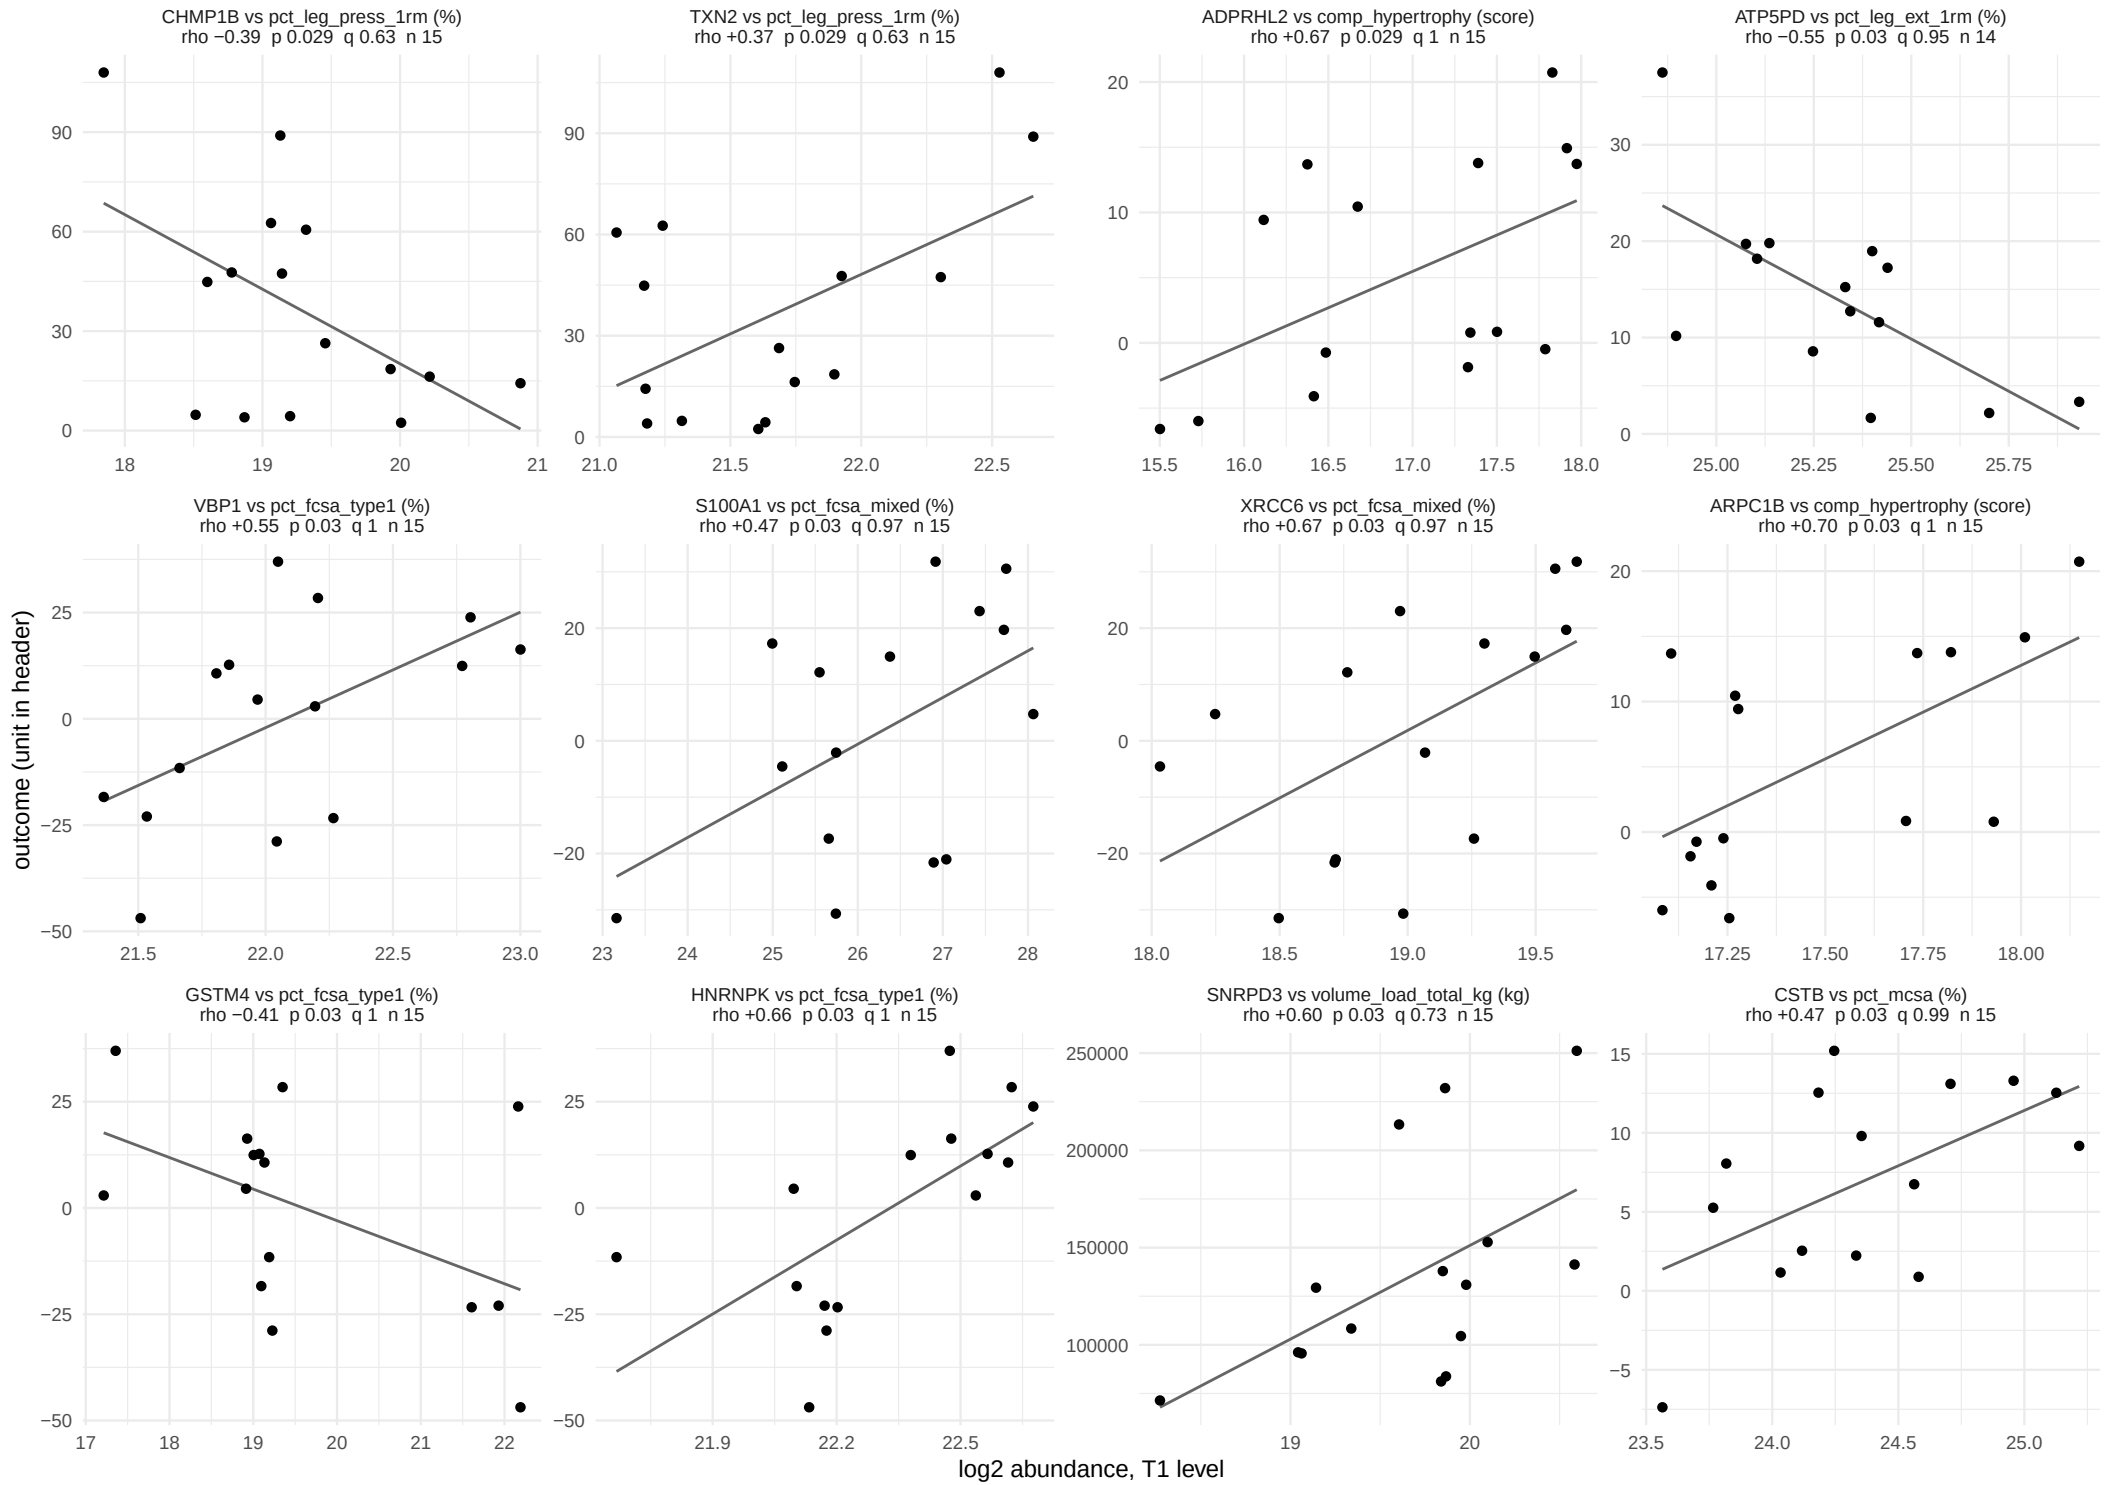

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline window


686 of 15200 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 32 of 58.

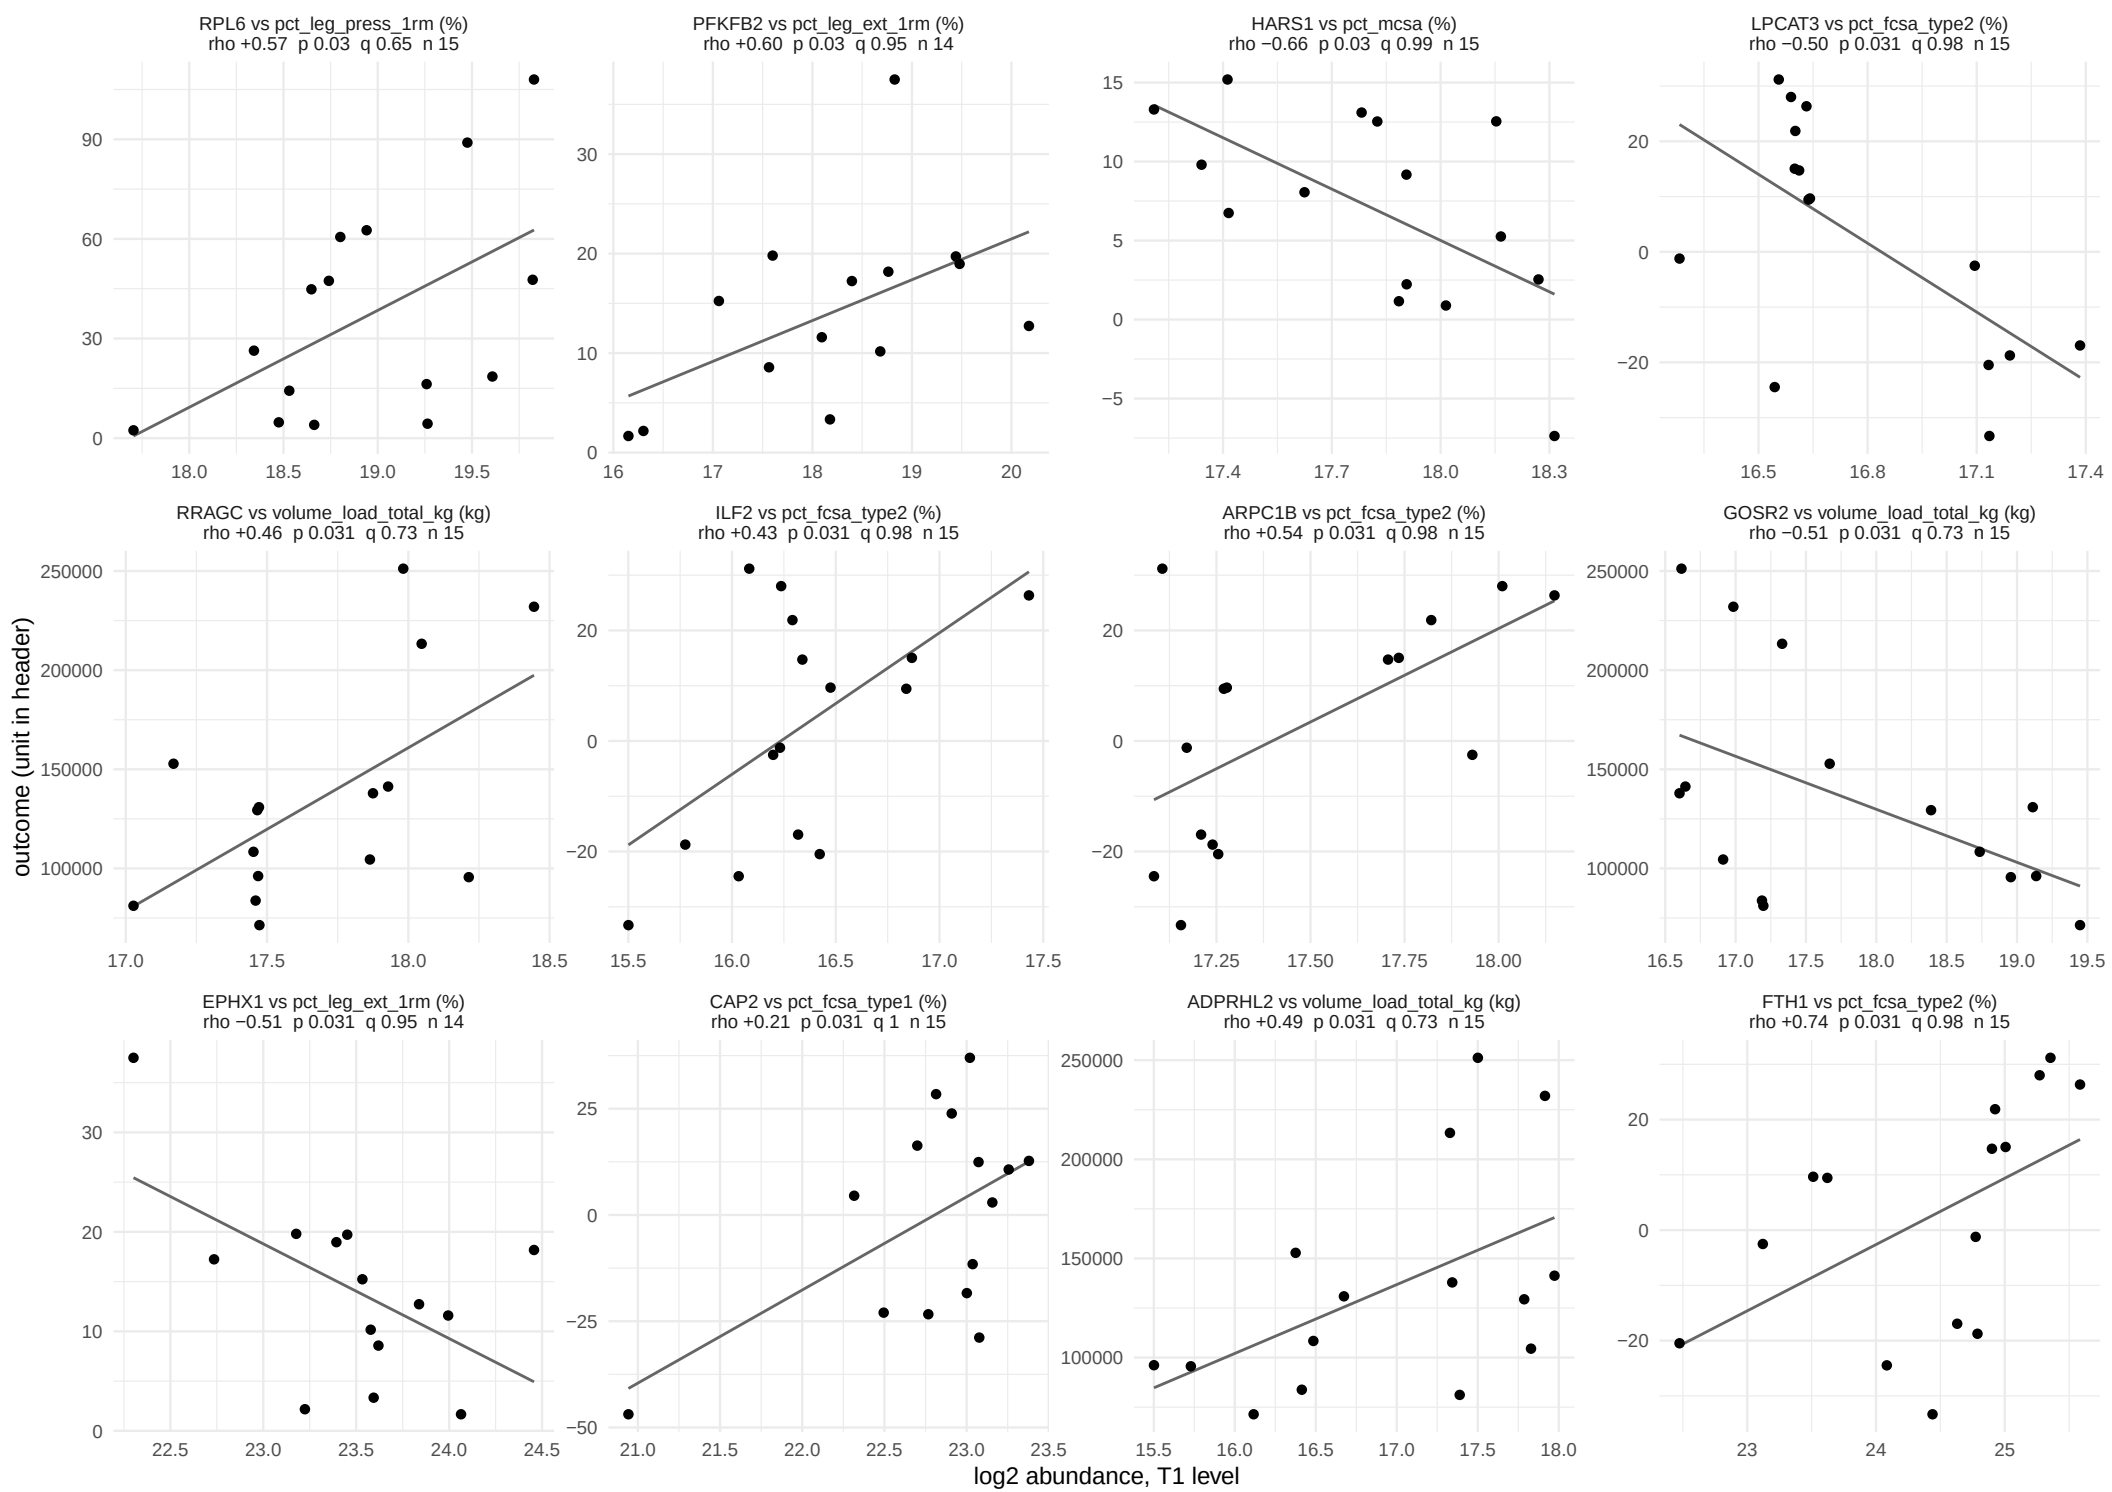

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline window


686 of 15200 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 33 of 58.

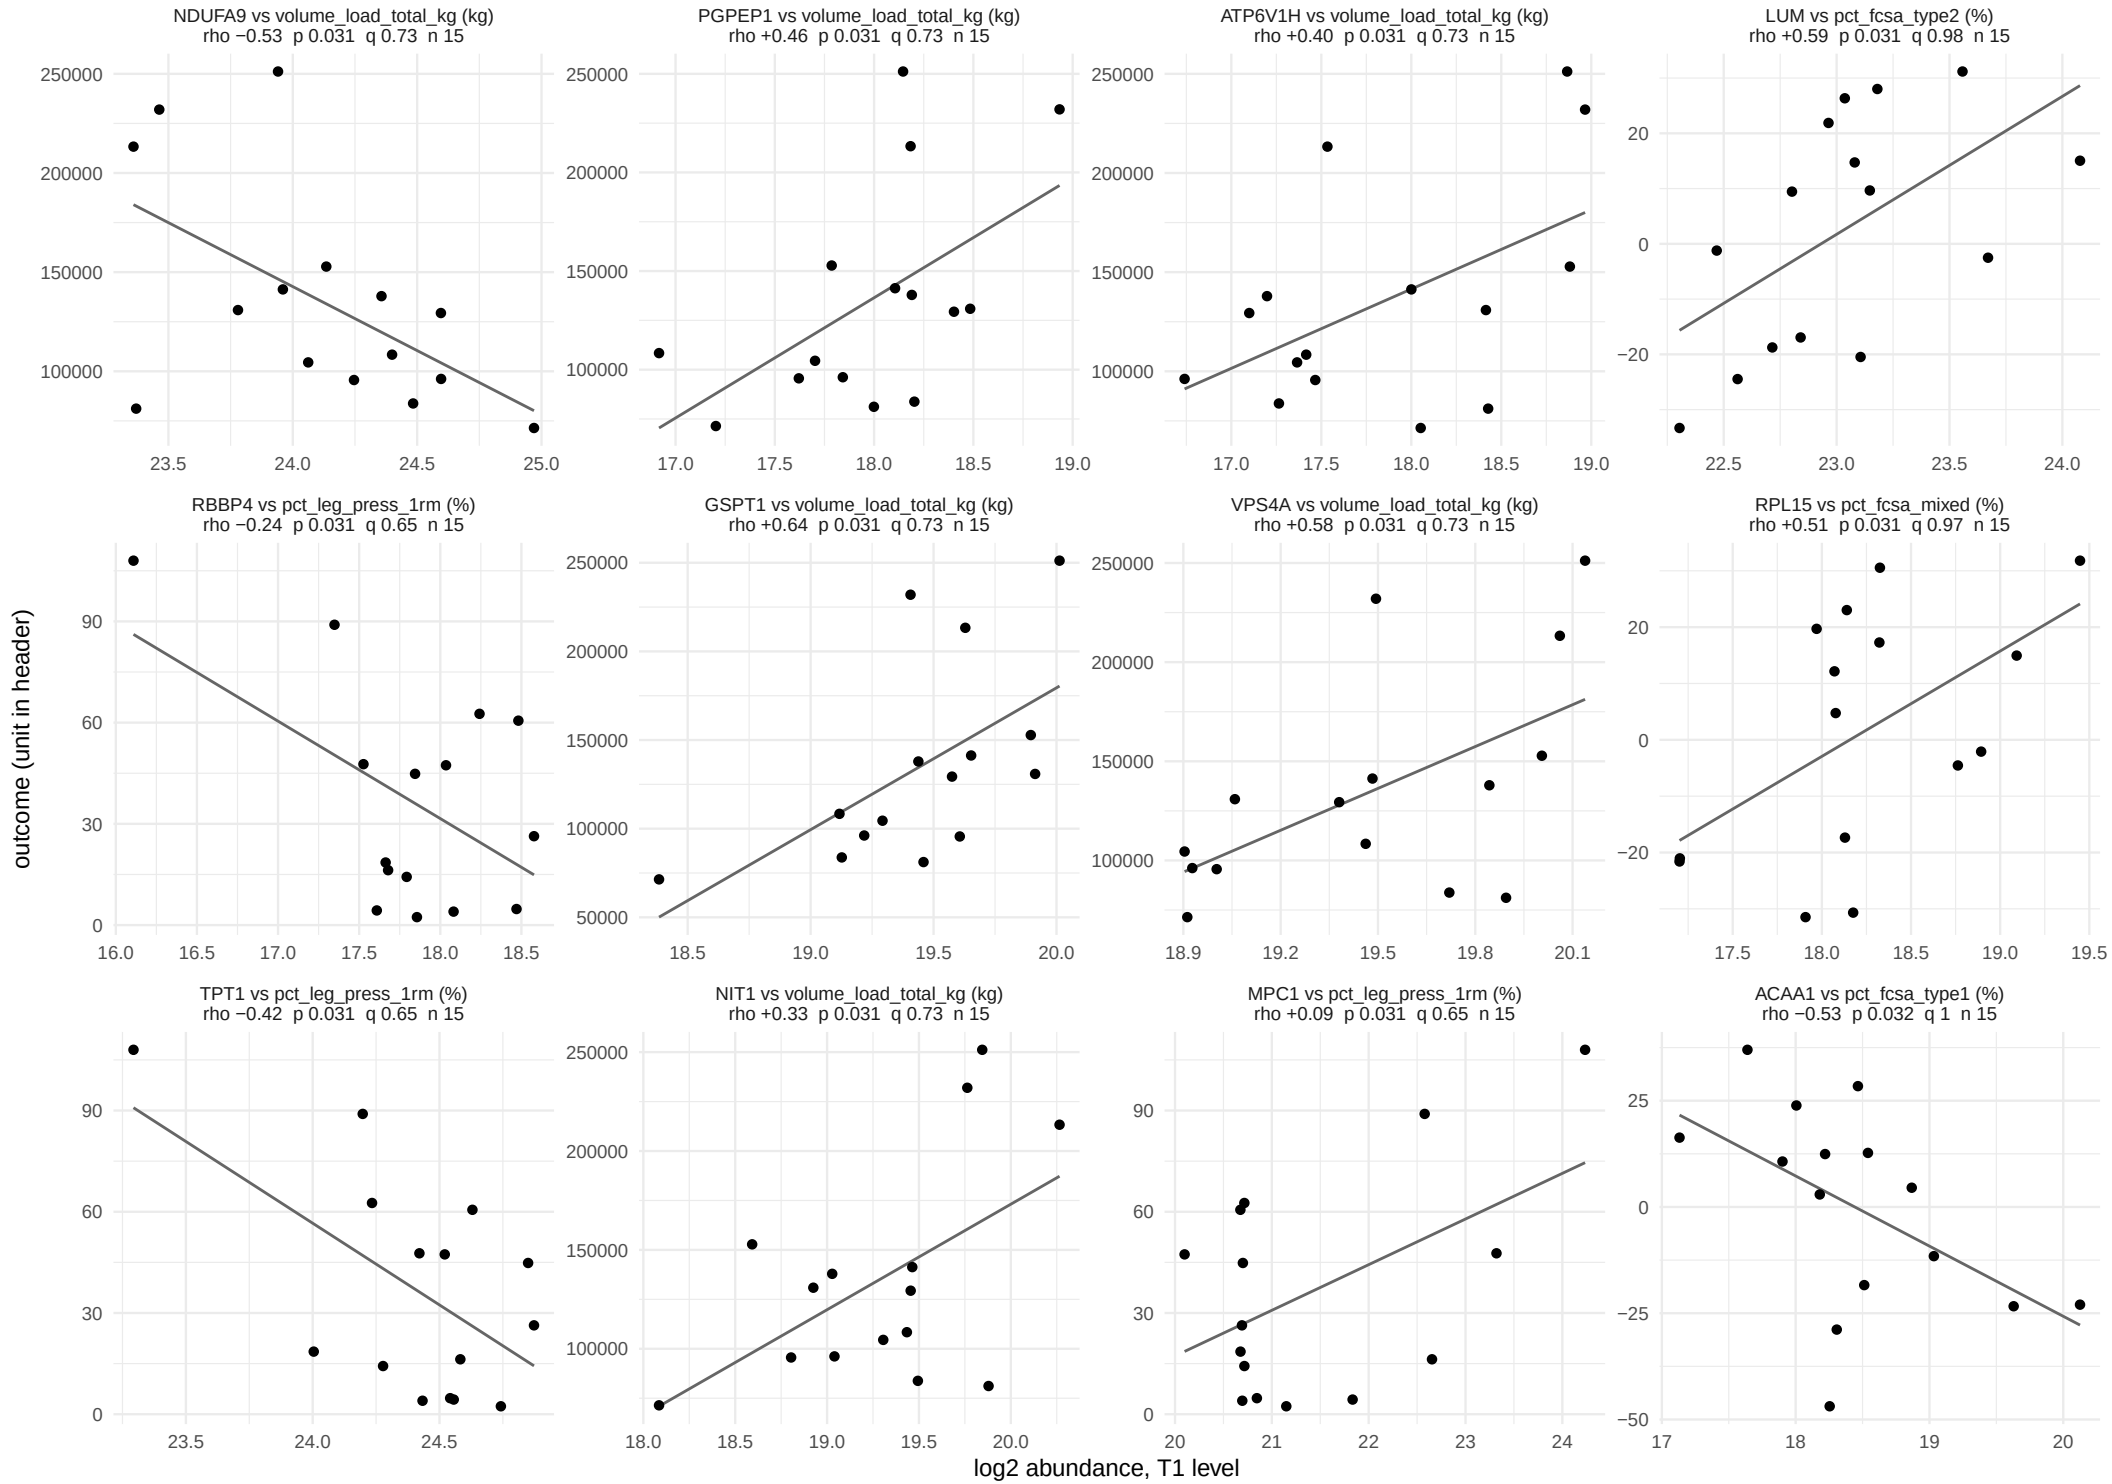

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline window


686 of 15200 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 34 of 58.

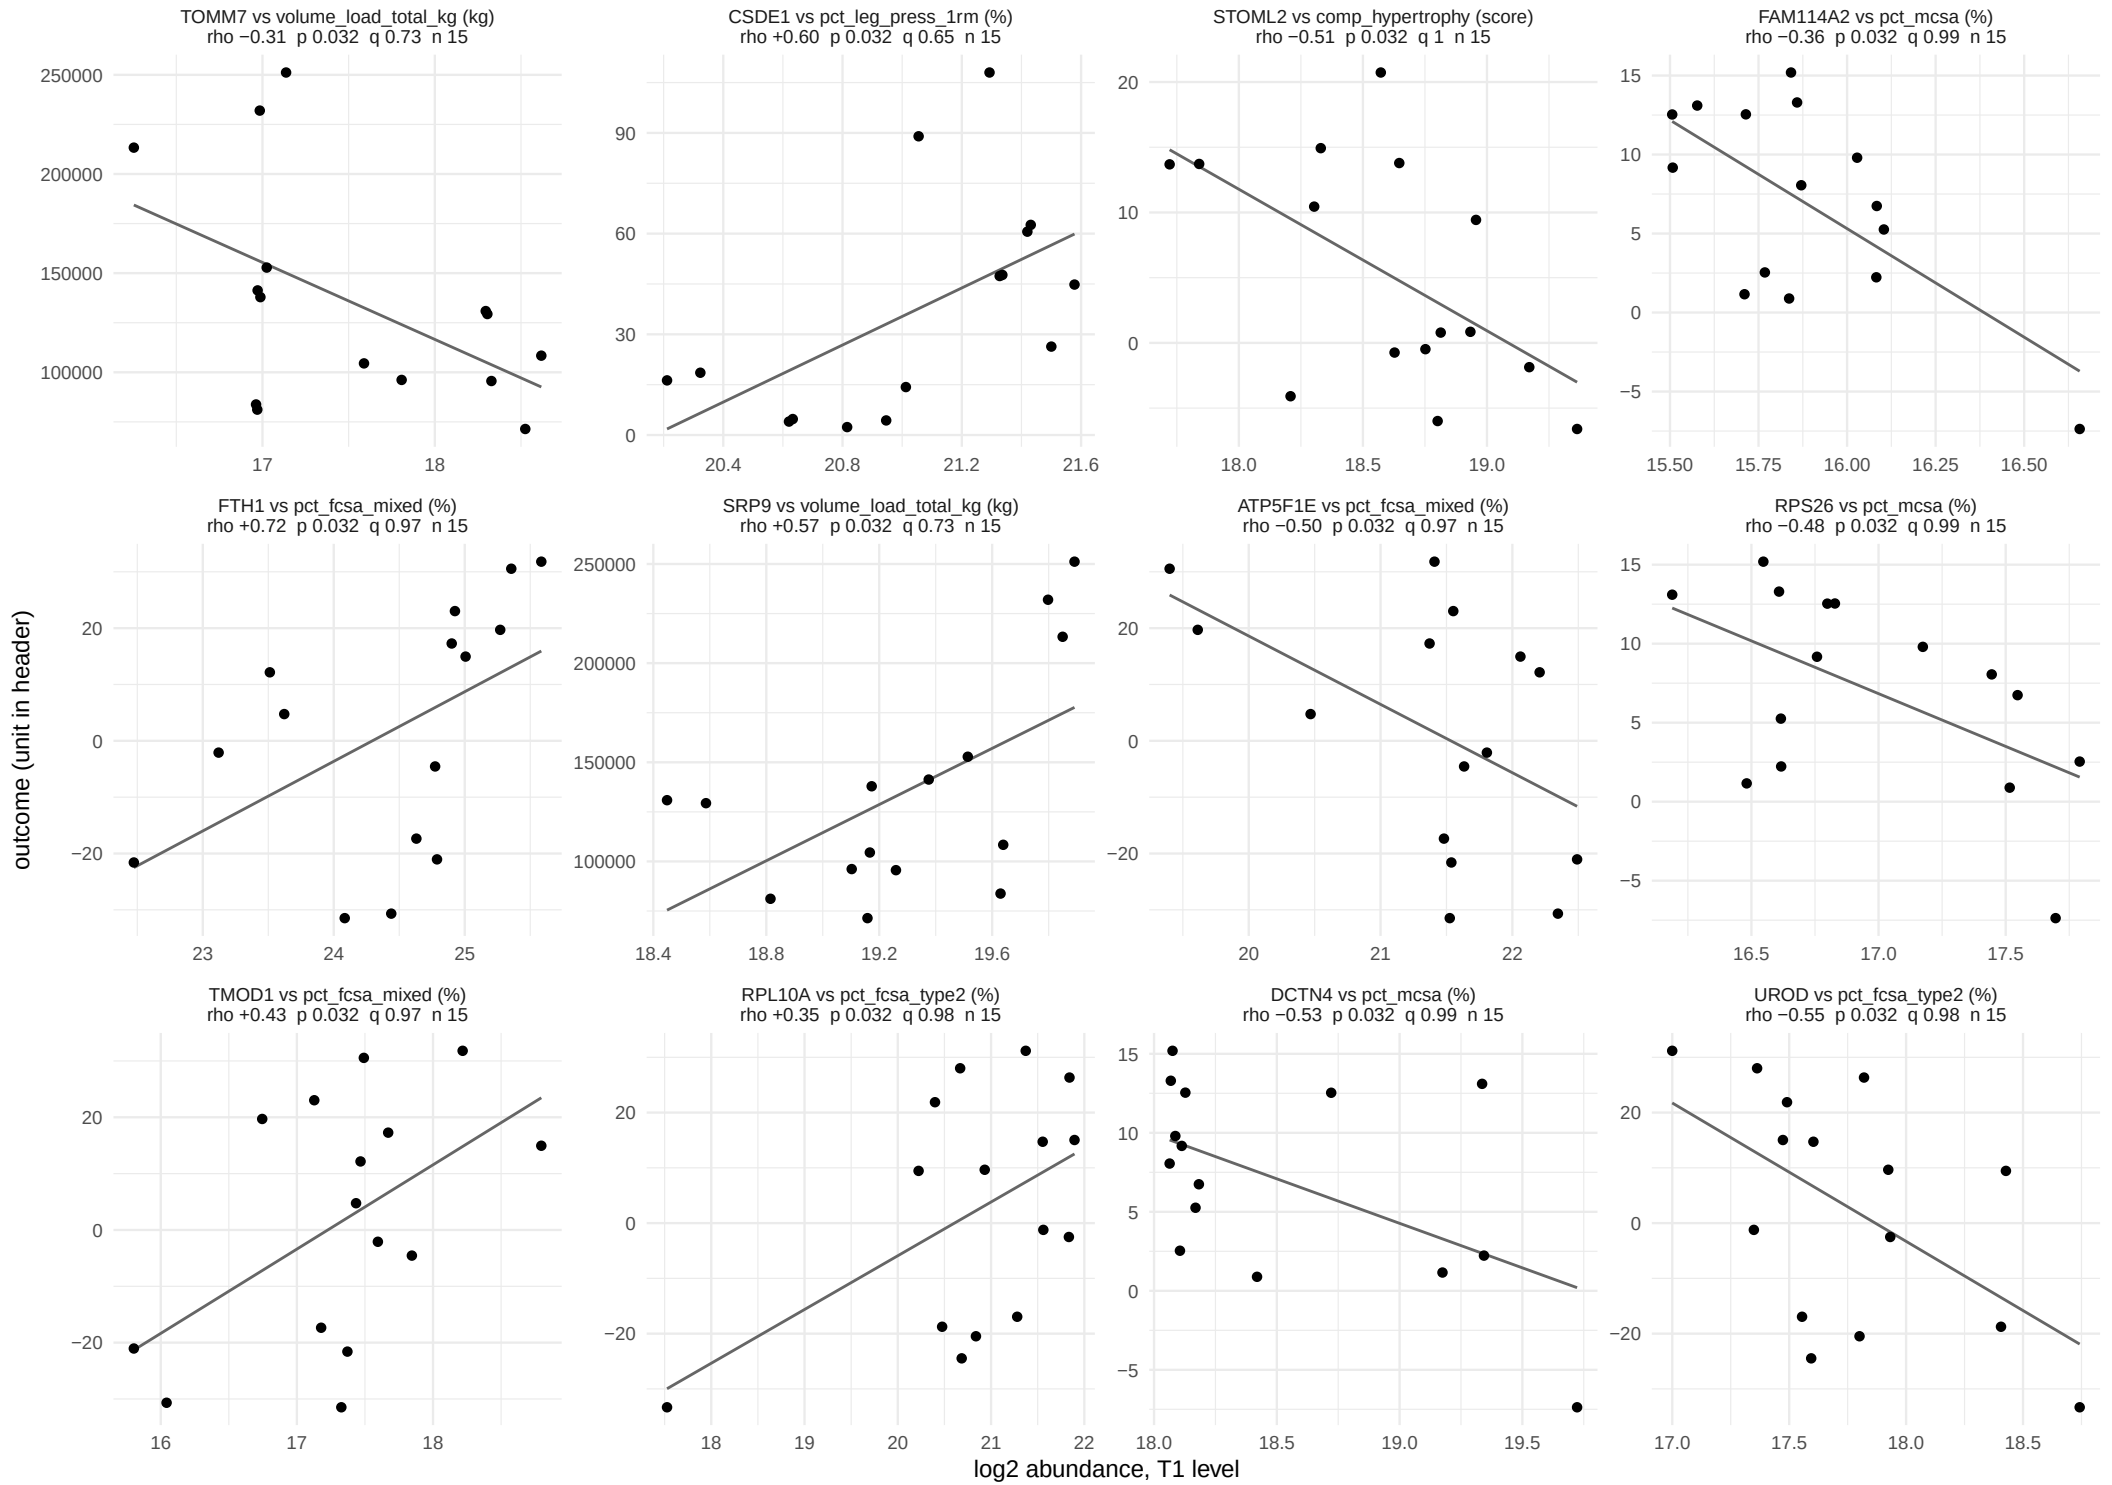

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline window


686 of 15200 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 35 of 58.

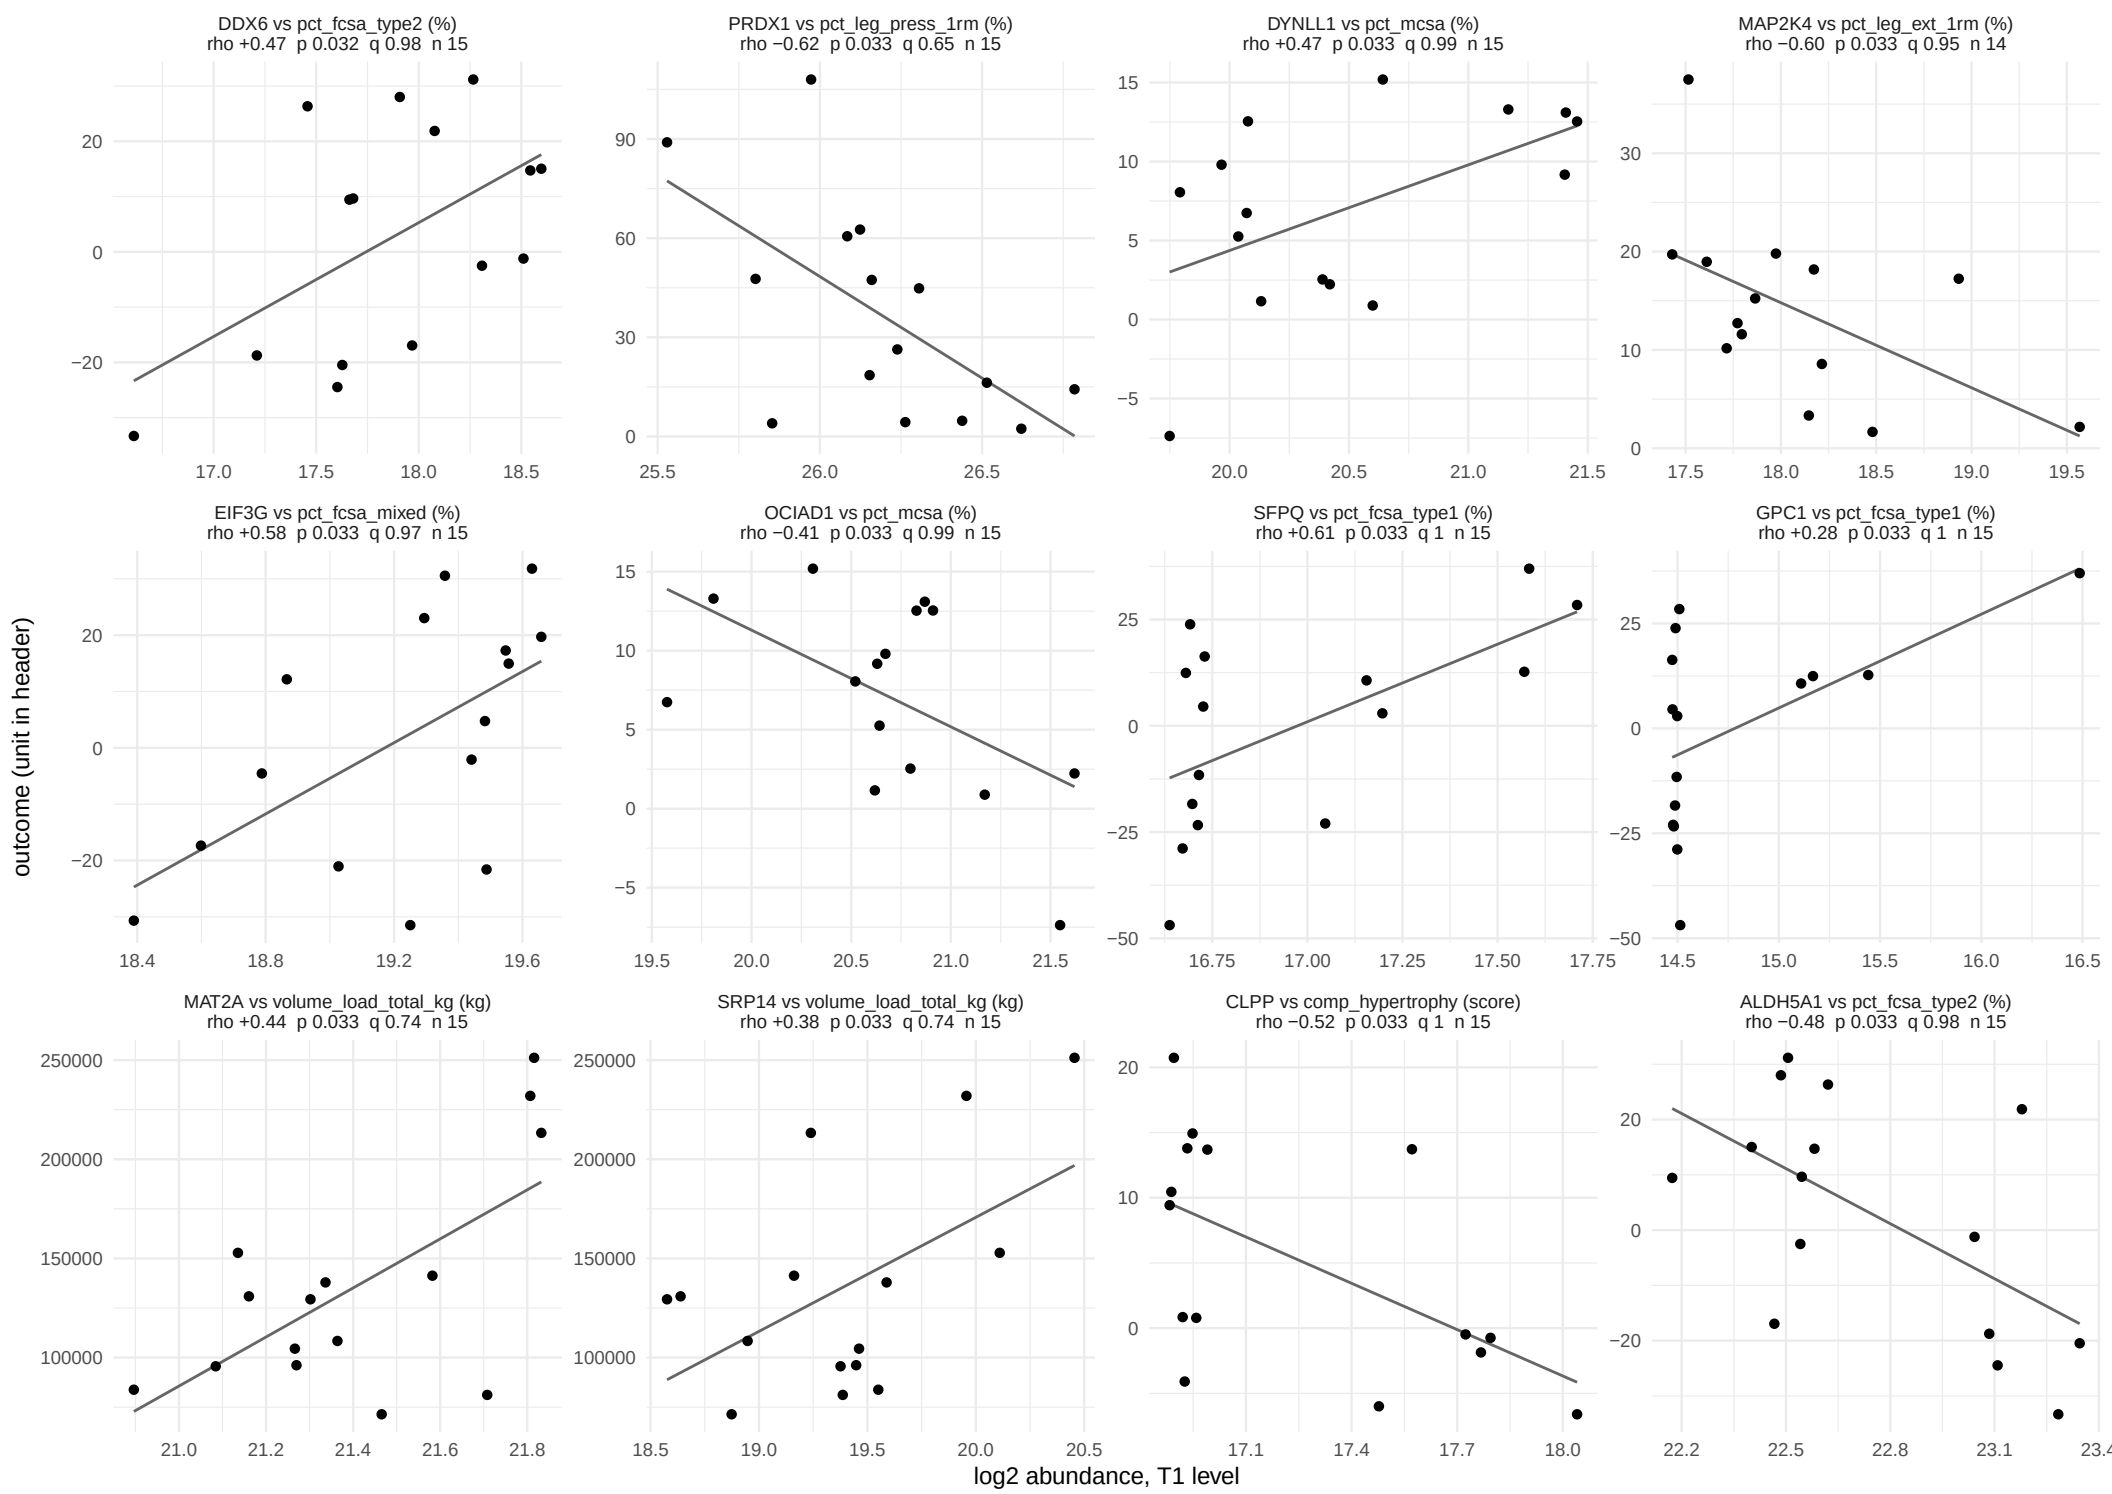

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline window


686 of 15200 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 36 of 58.

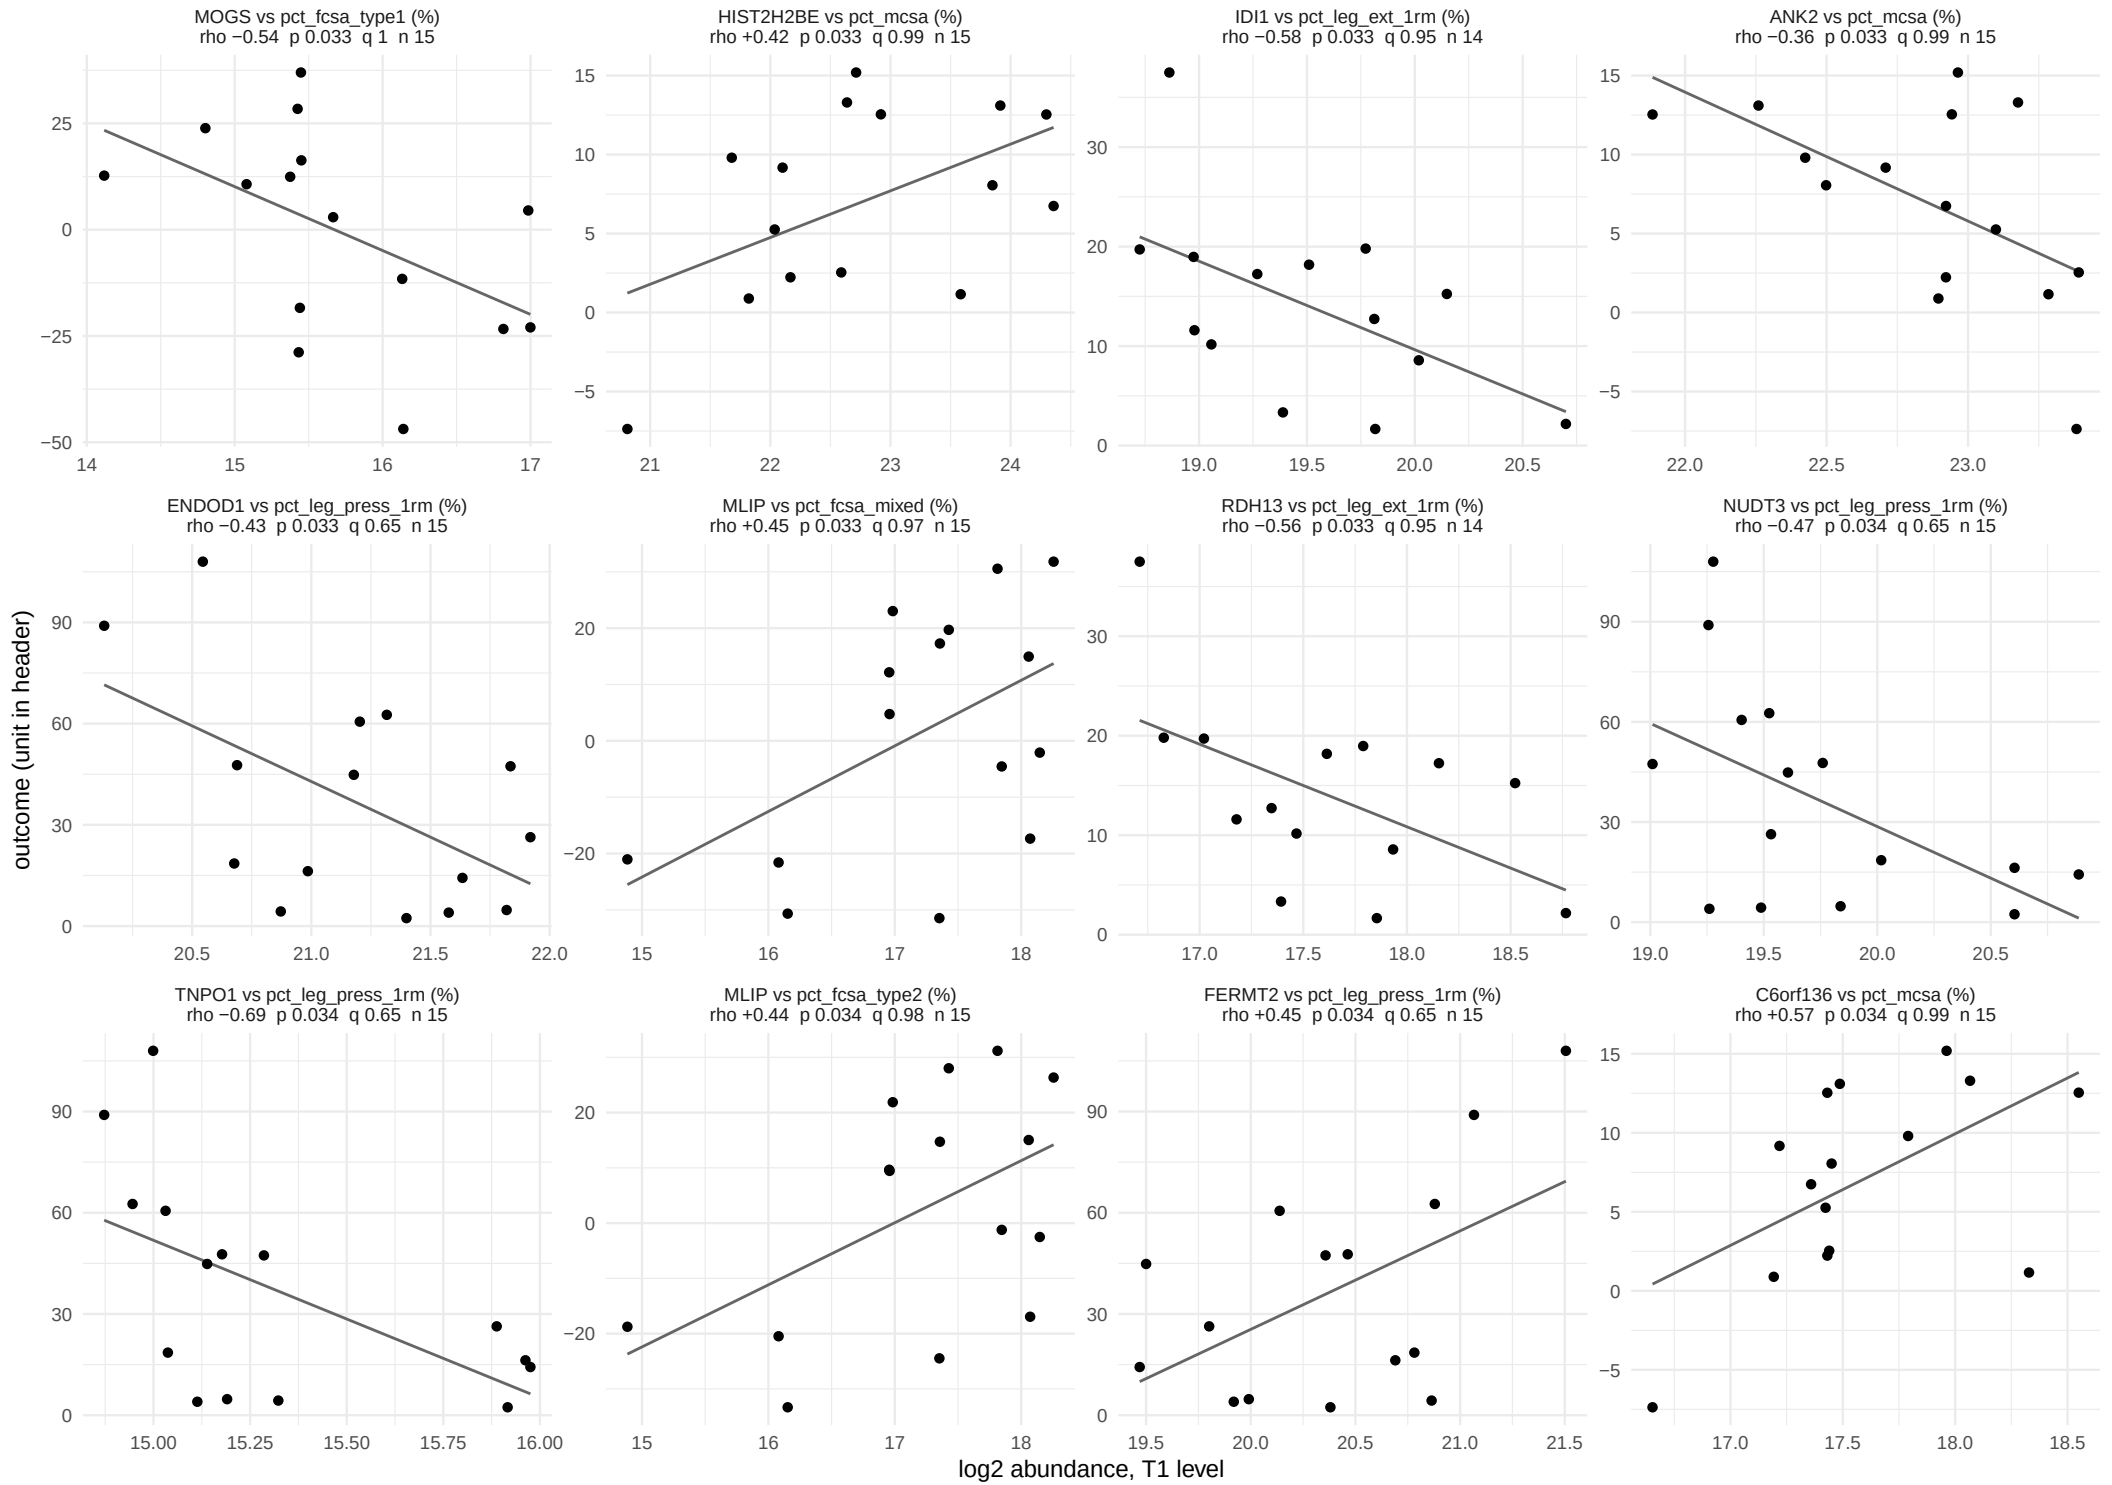

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline window


686 of 15200 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 37 of 58.

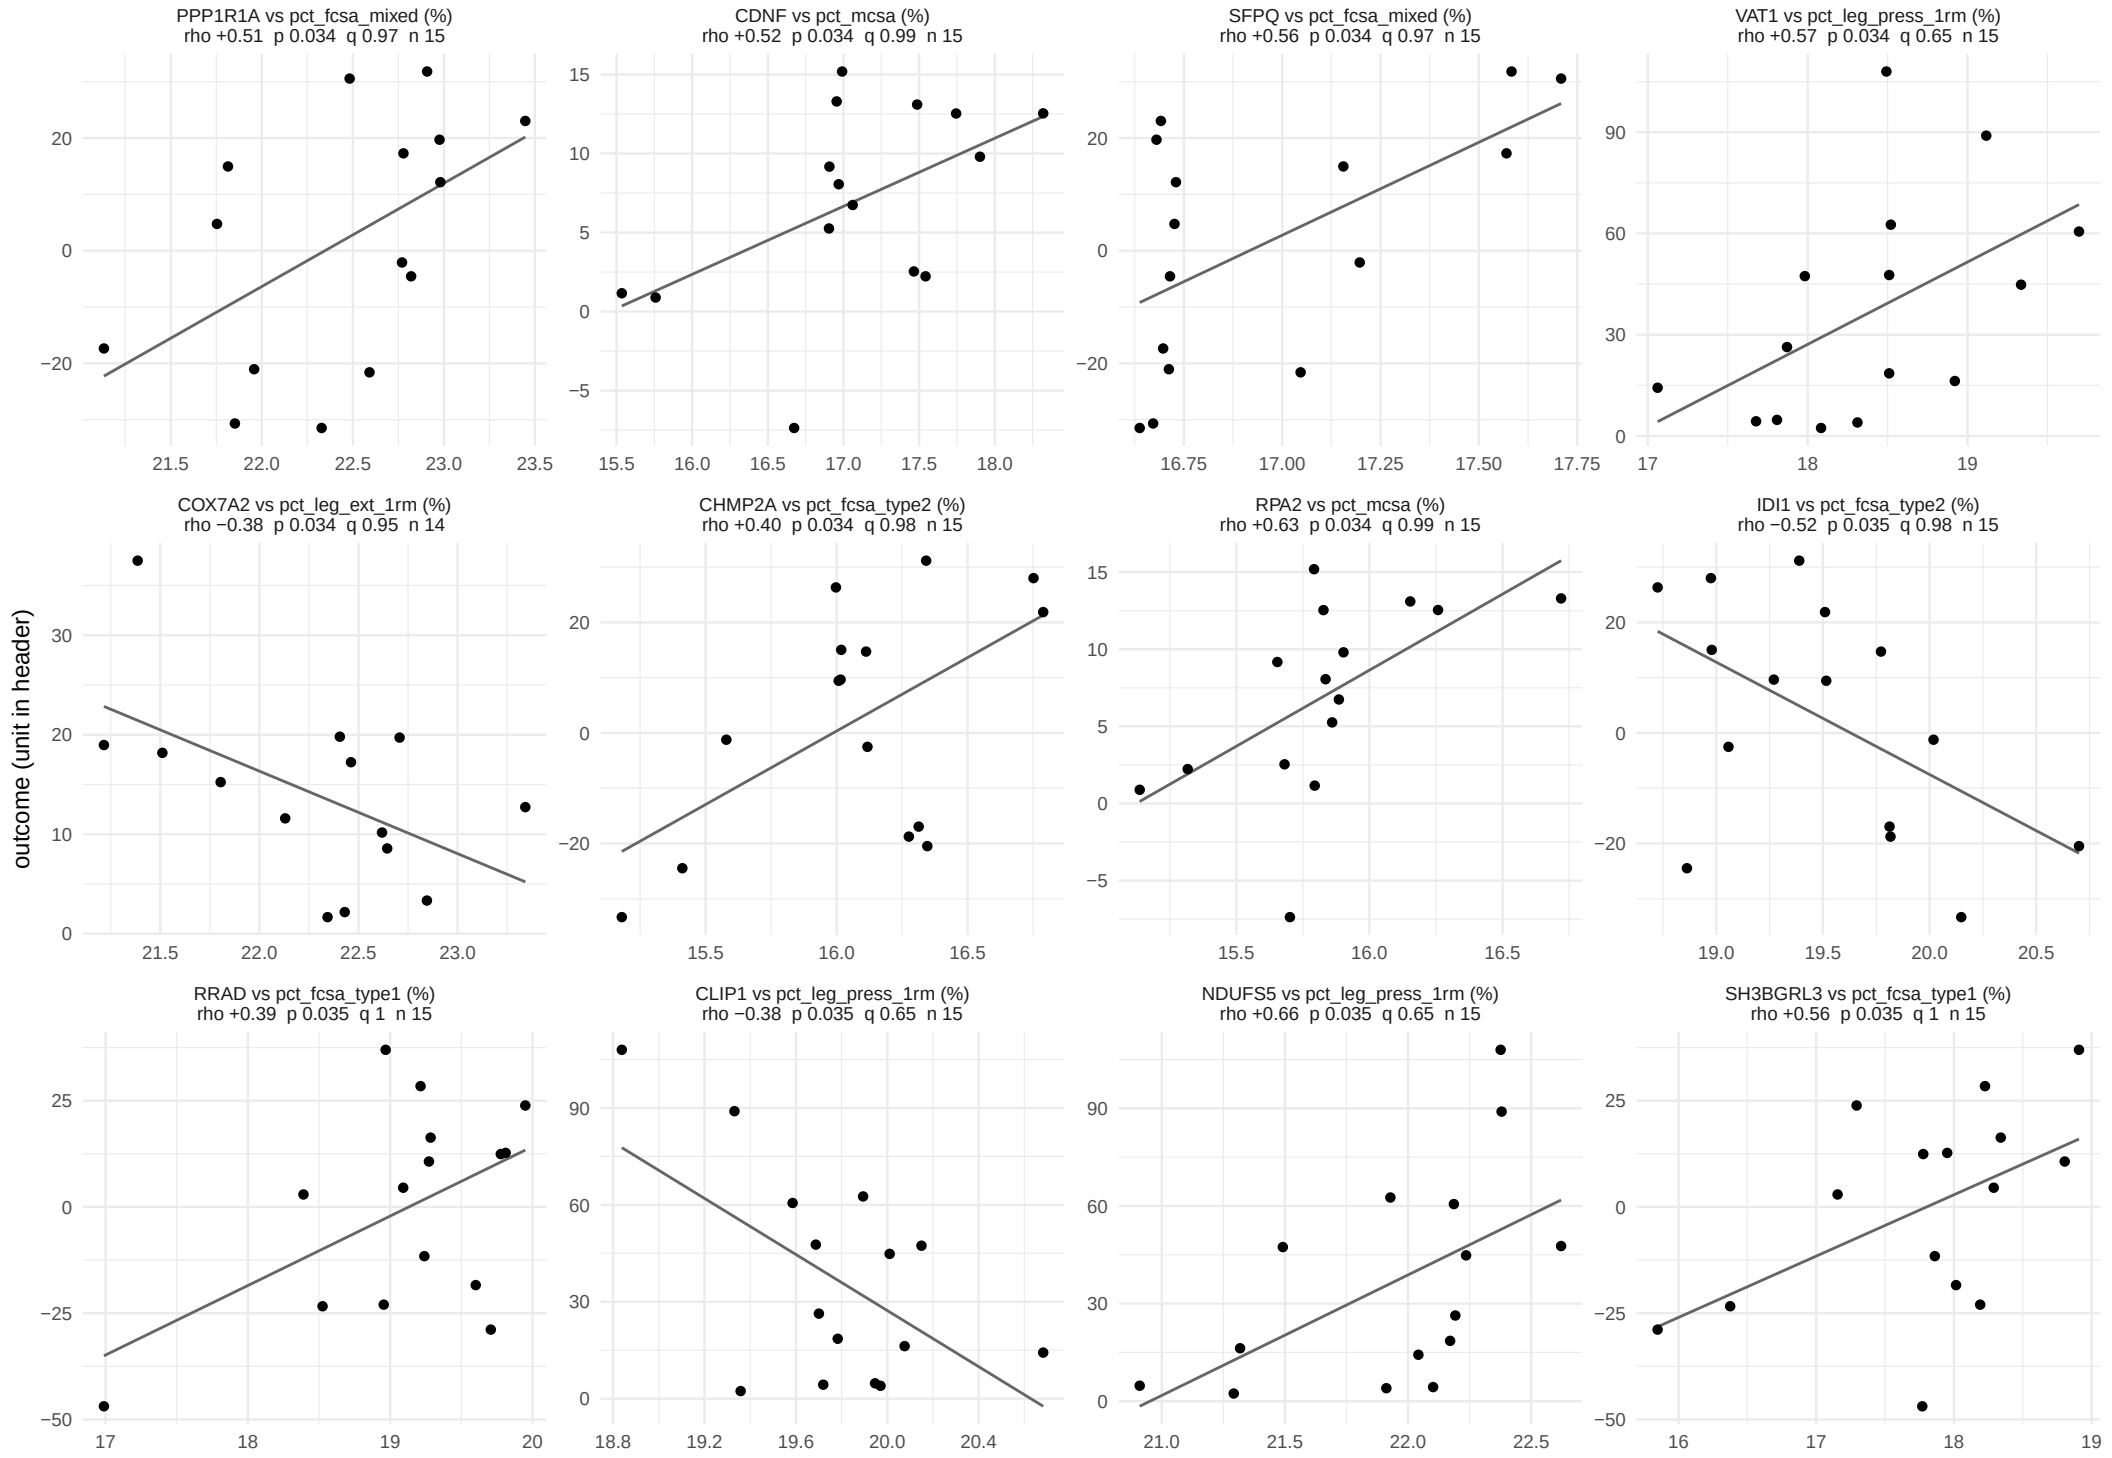

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline window


686 of 15200 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 38 of 58.

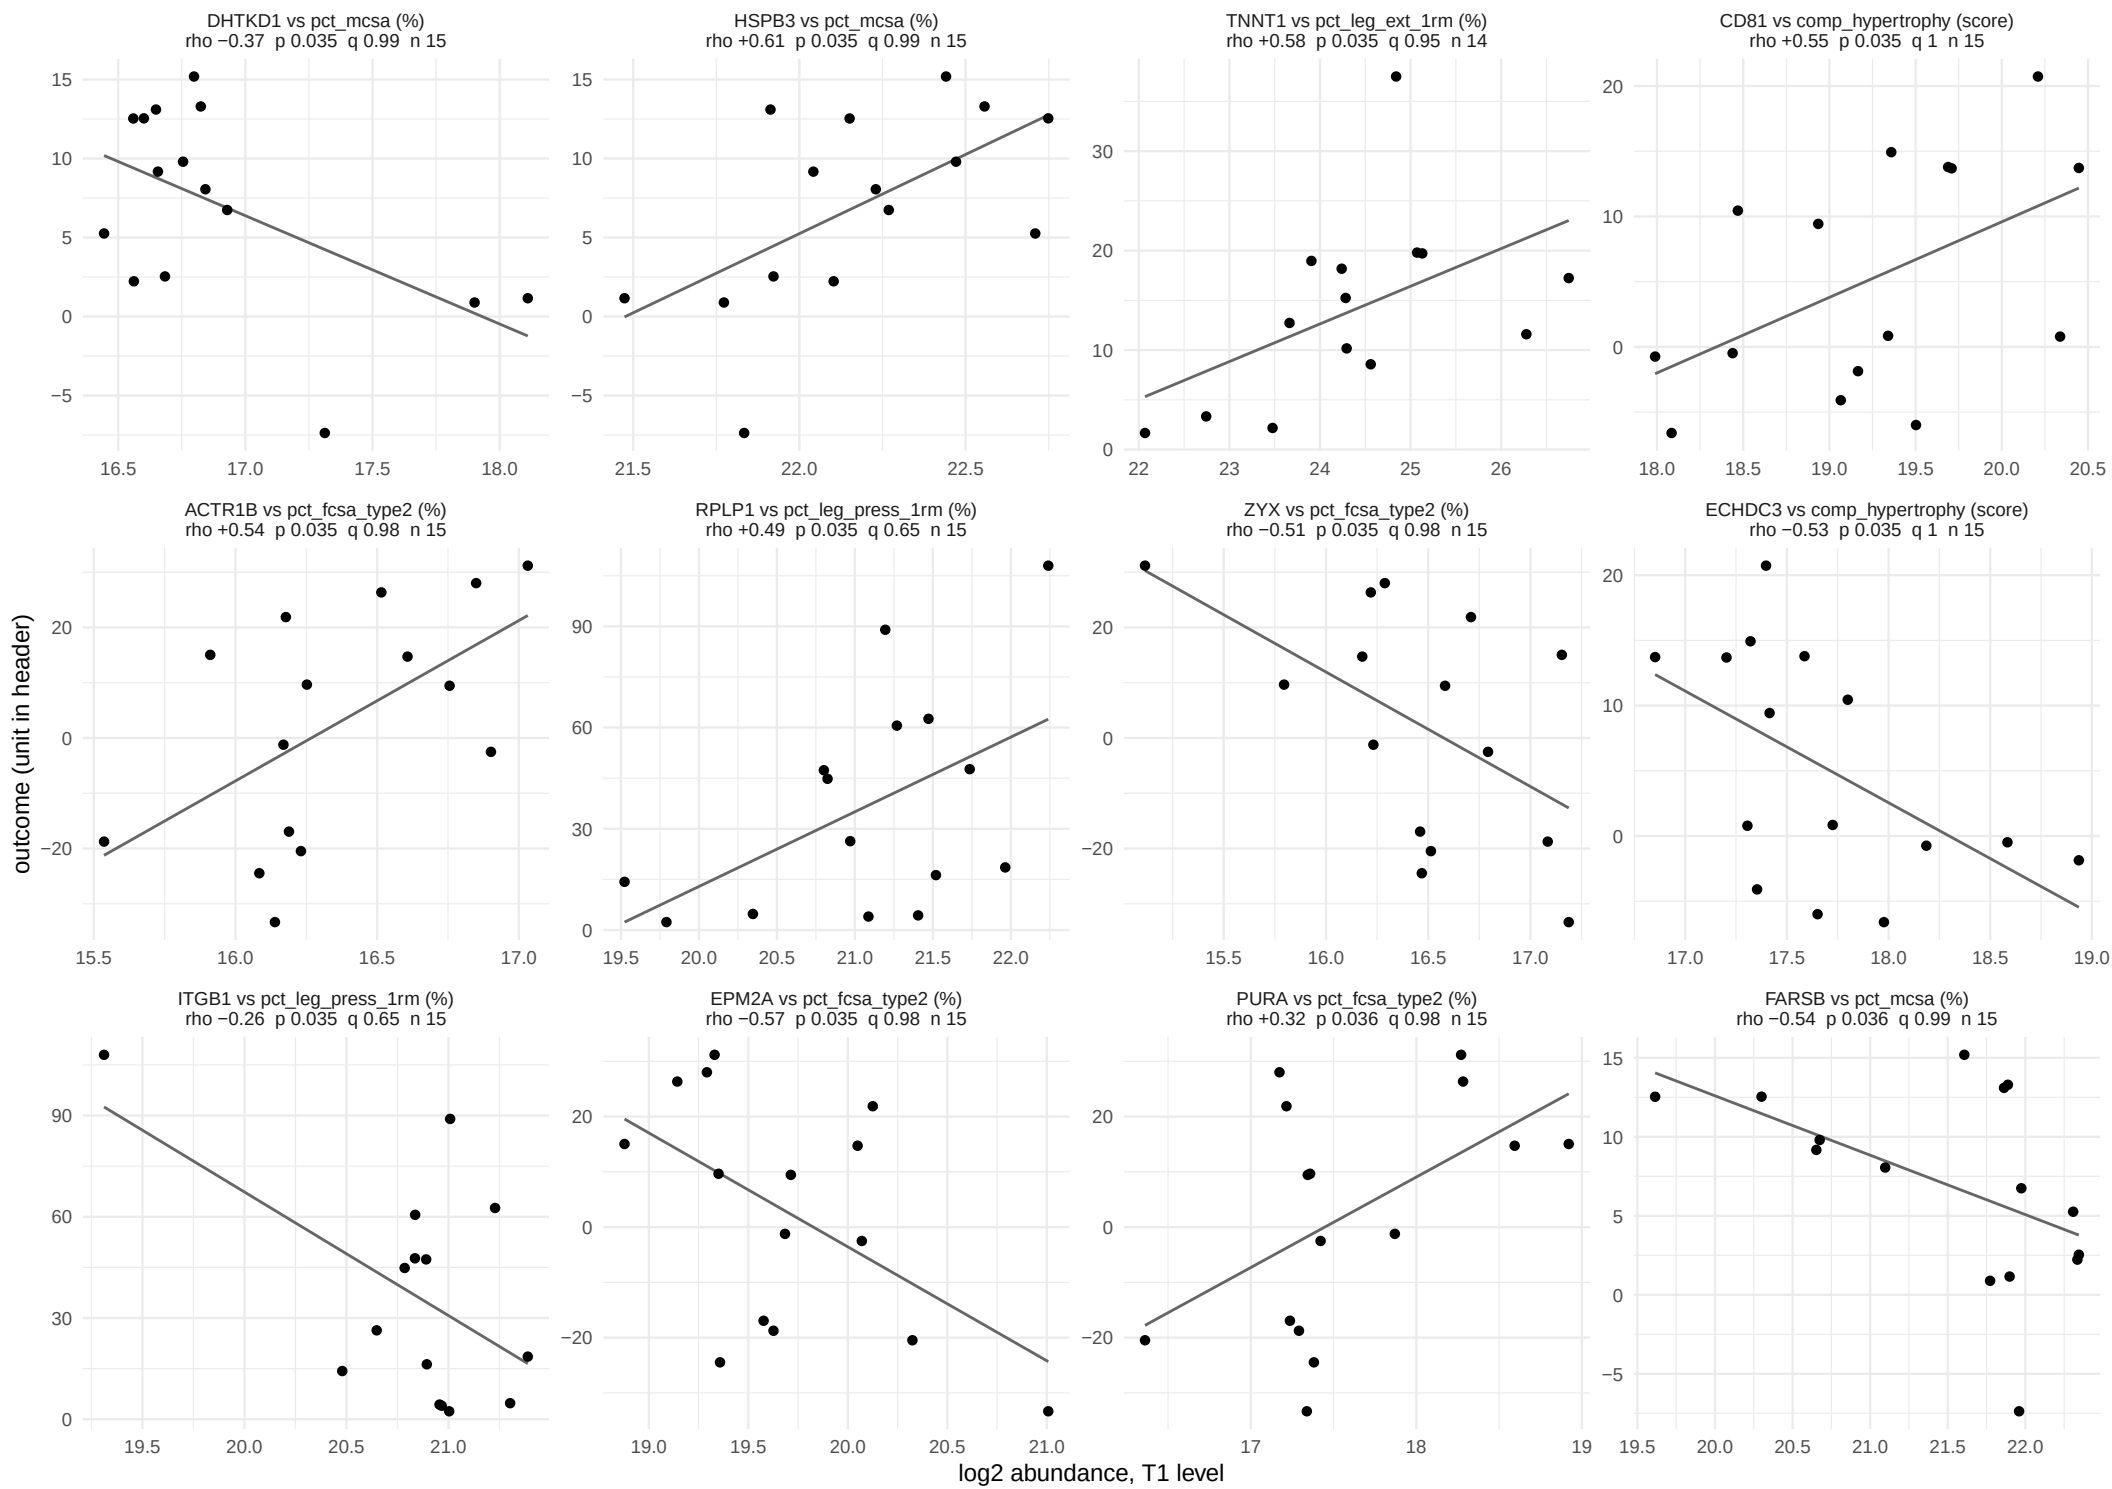

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline window


686 of 15200 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 39 of 58.

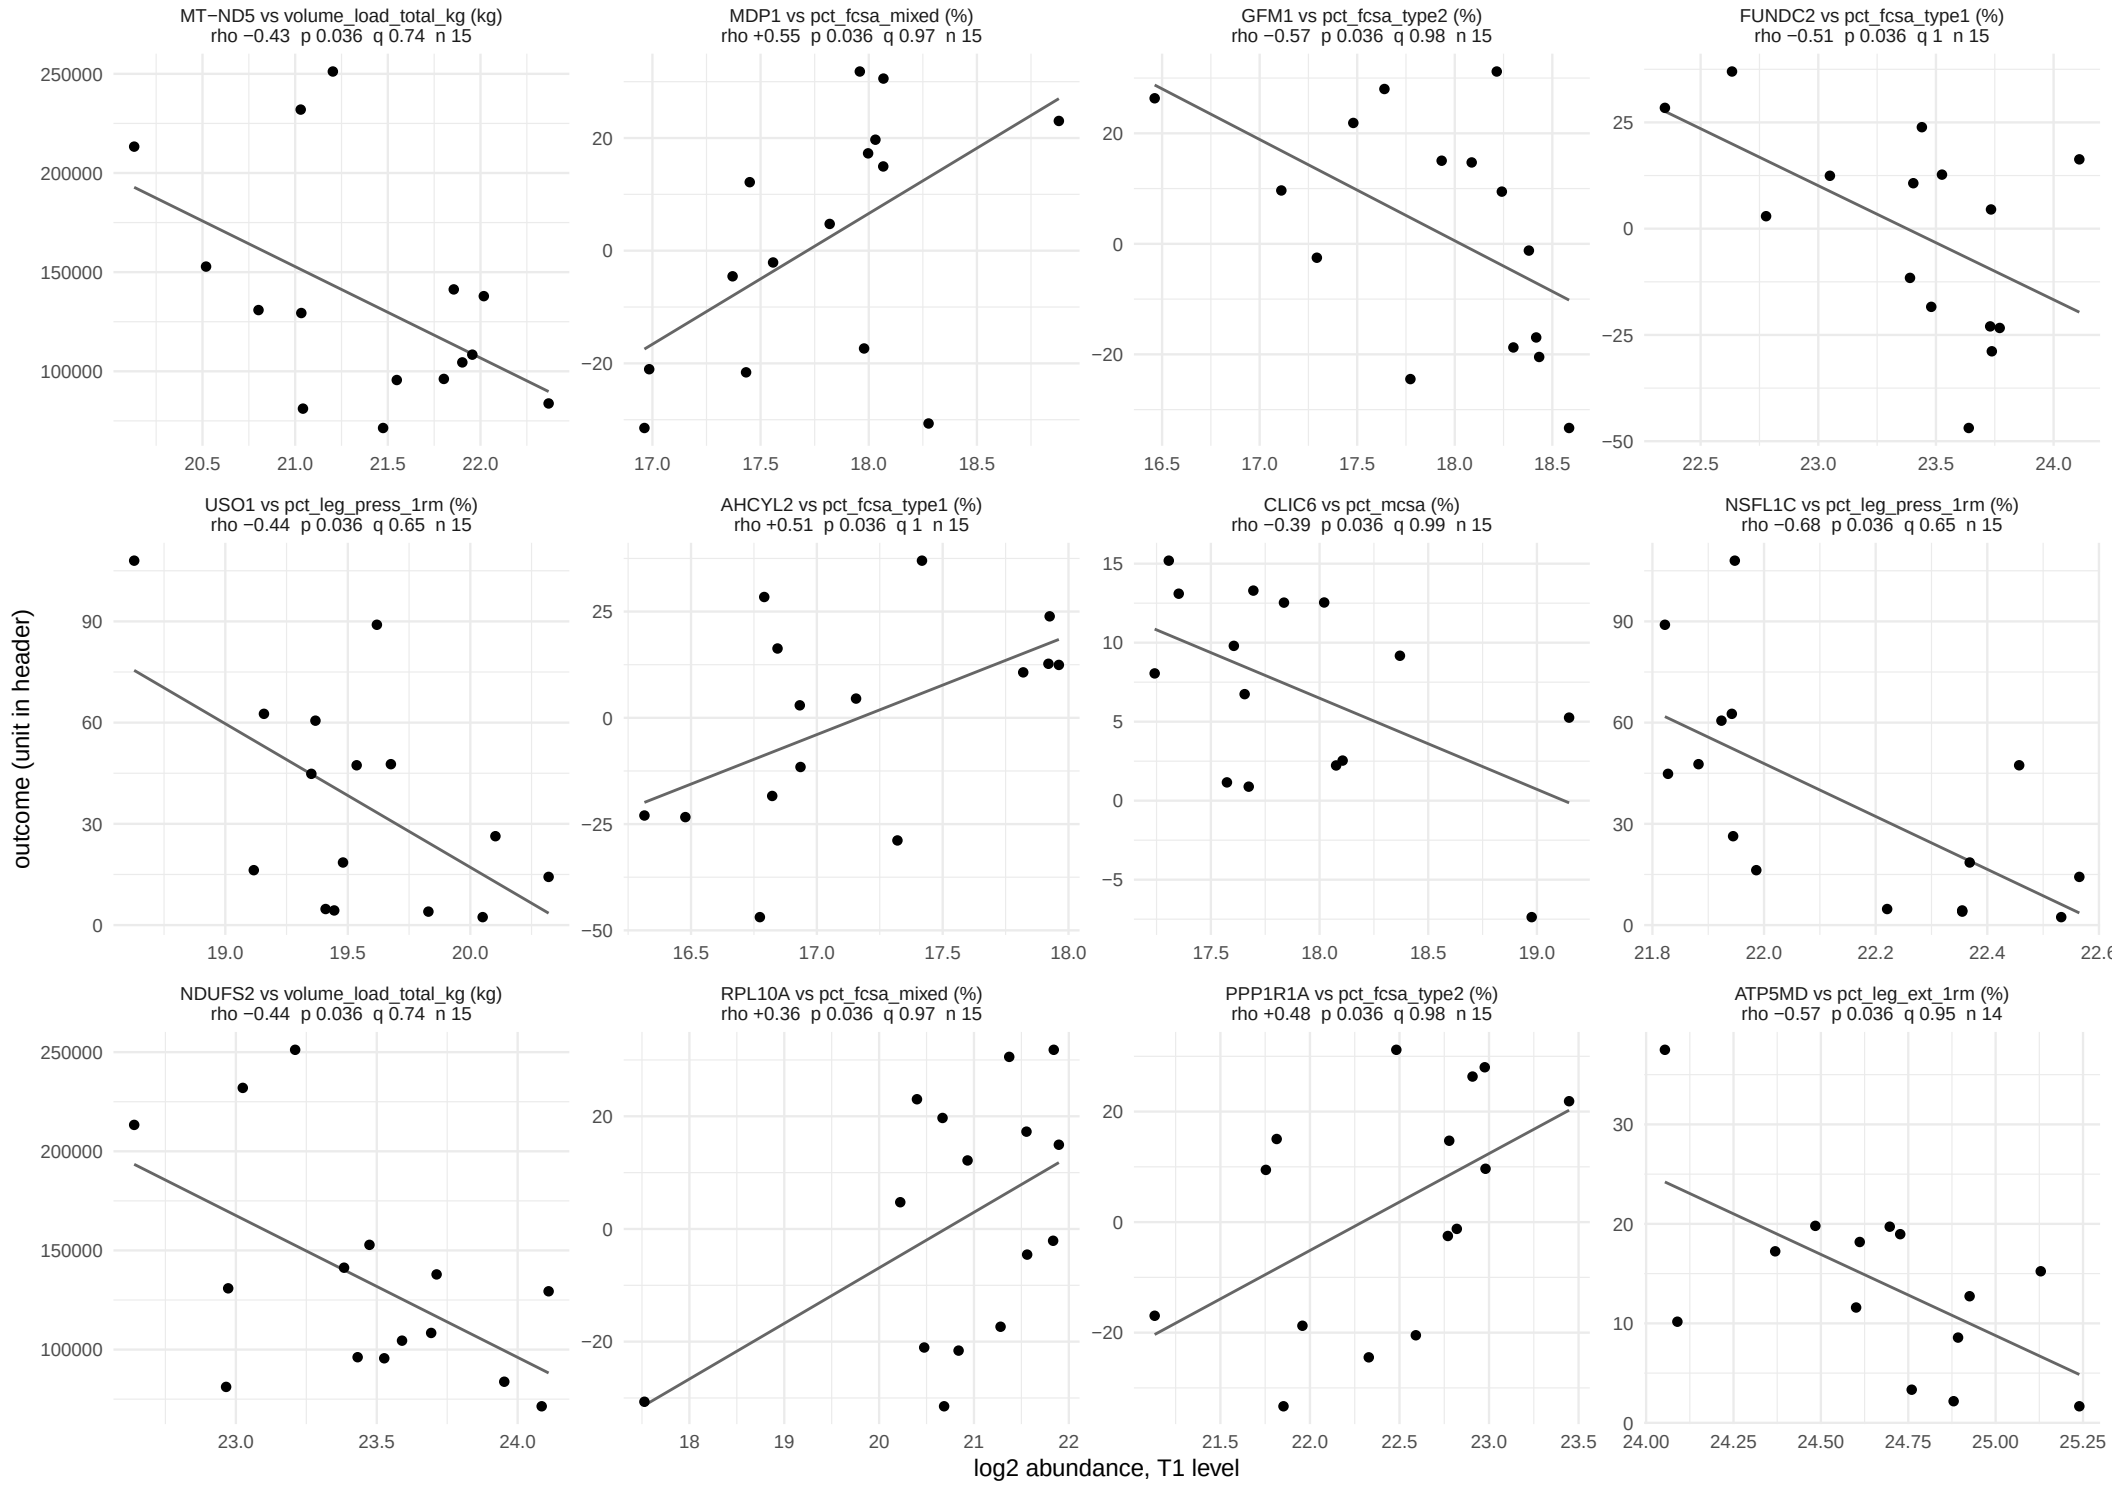

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline window


686 of 15200 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 40 of 58.

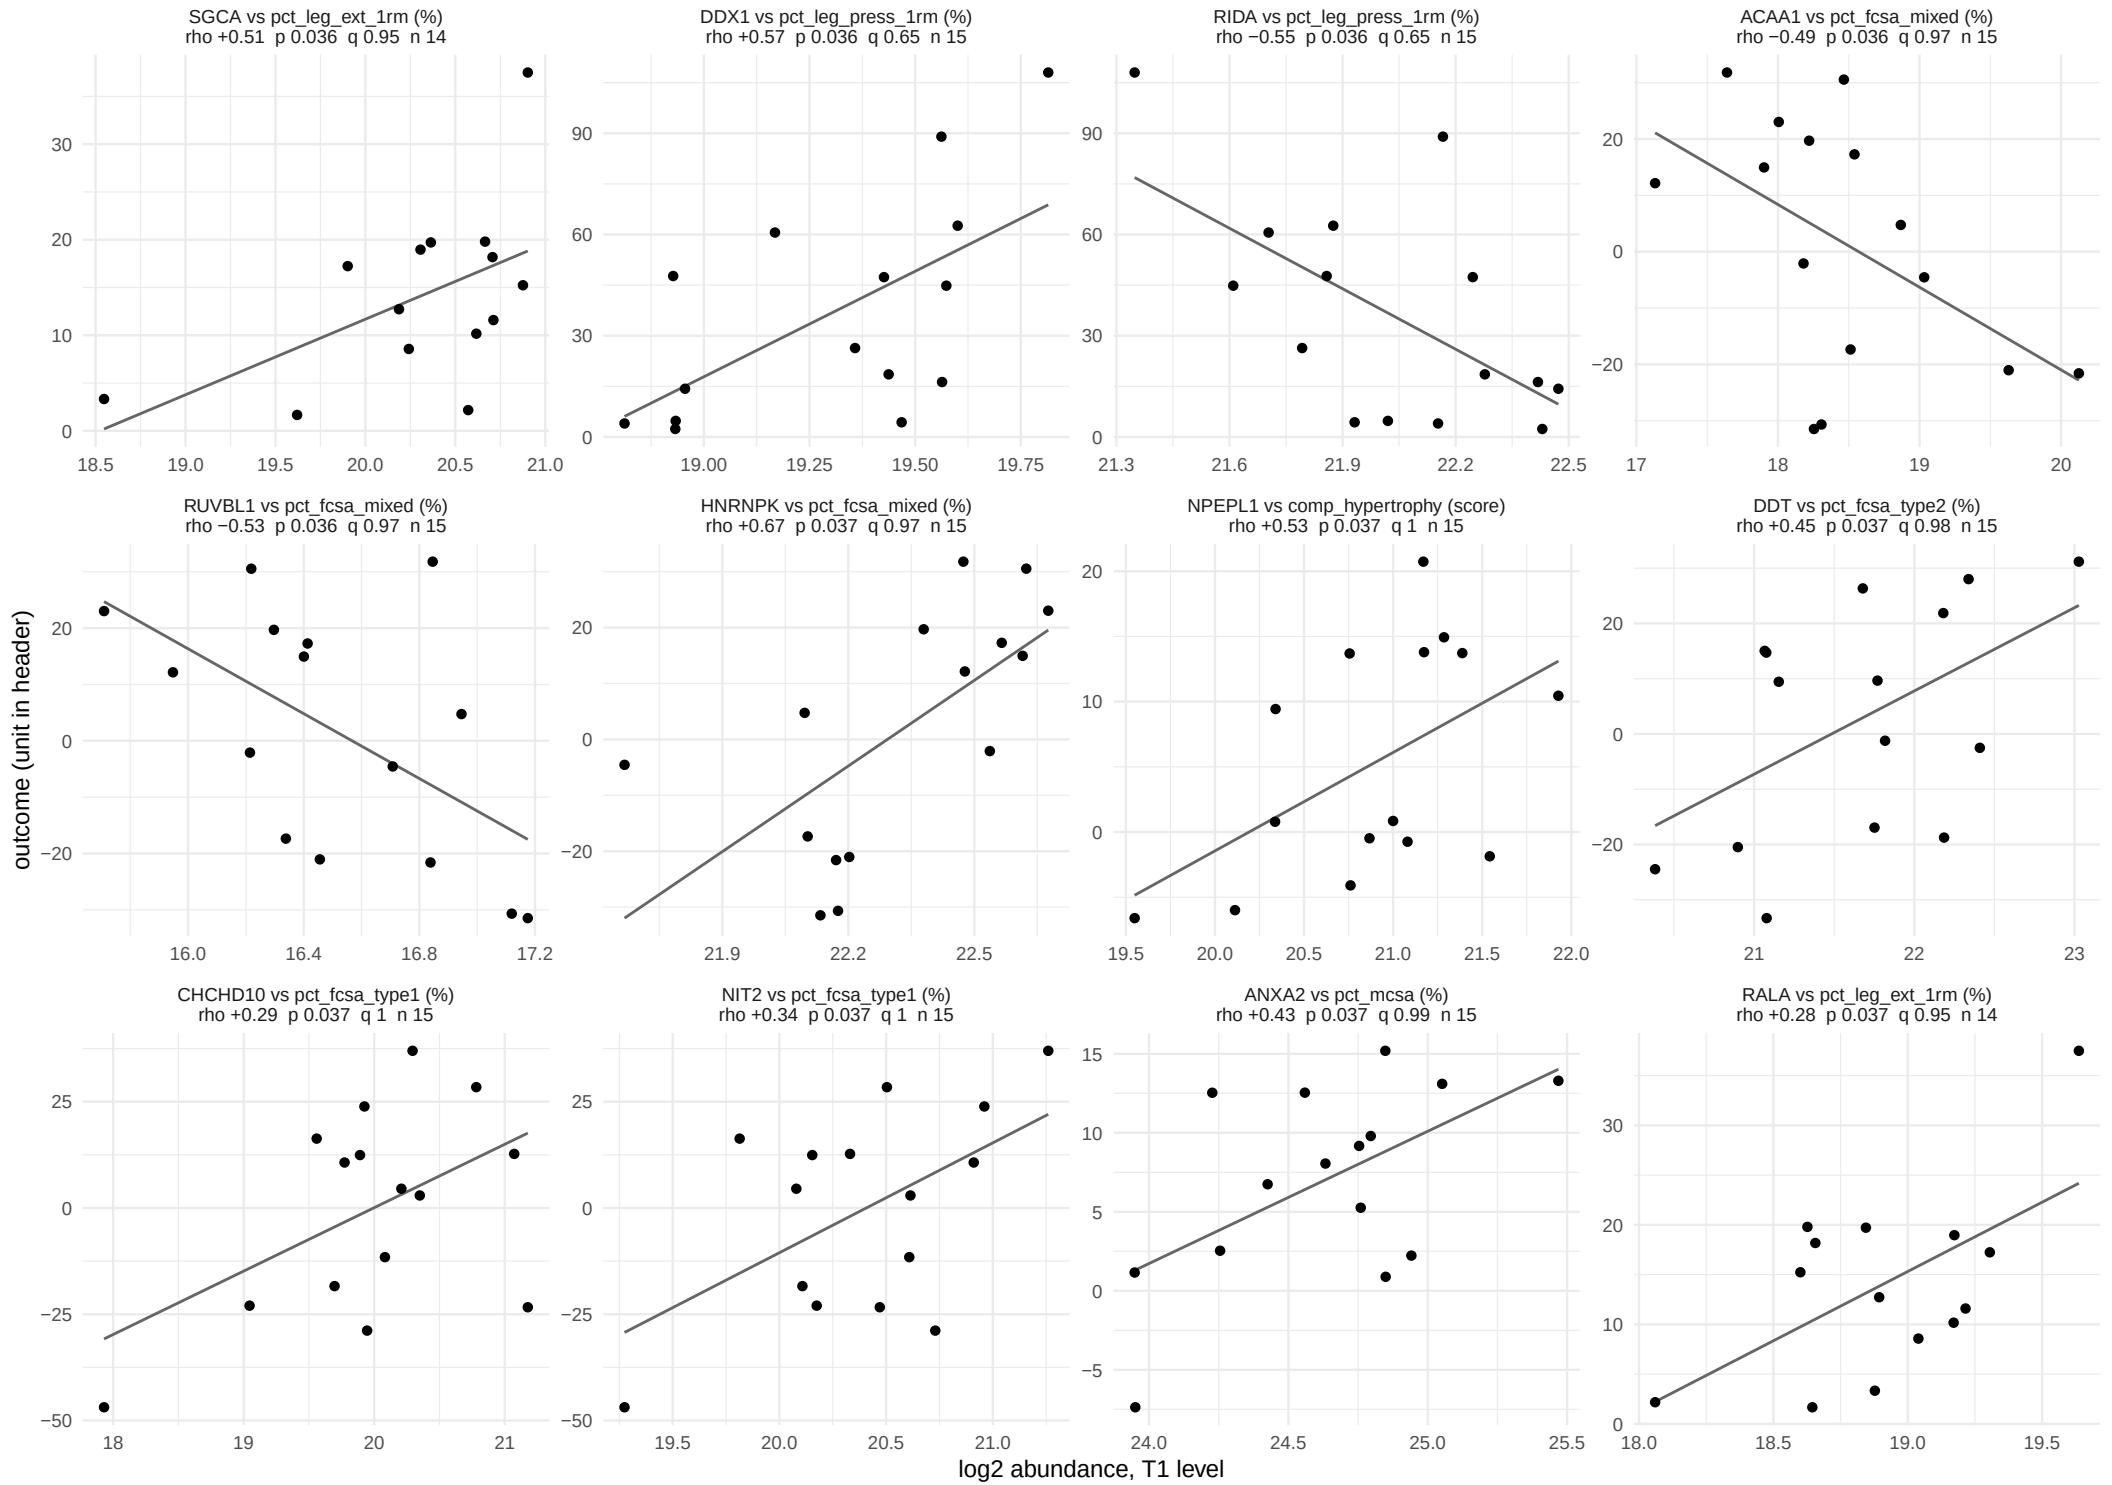

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline window


686 of 15200 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 41 of 58.

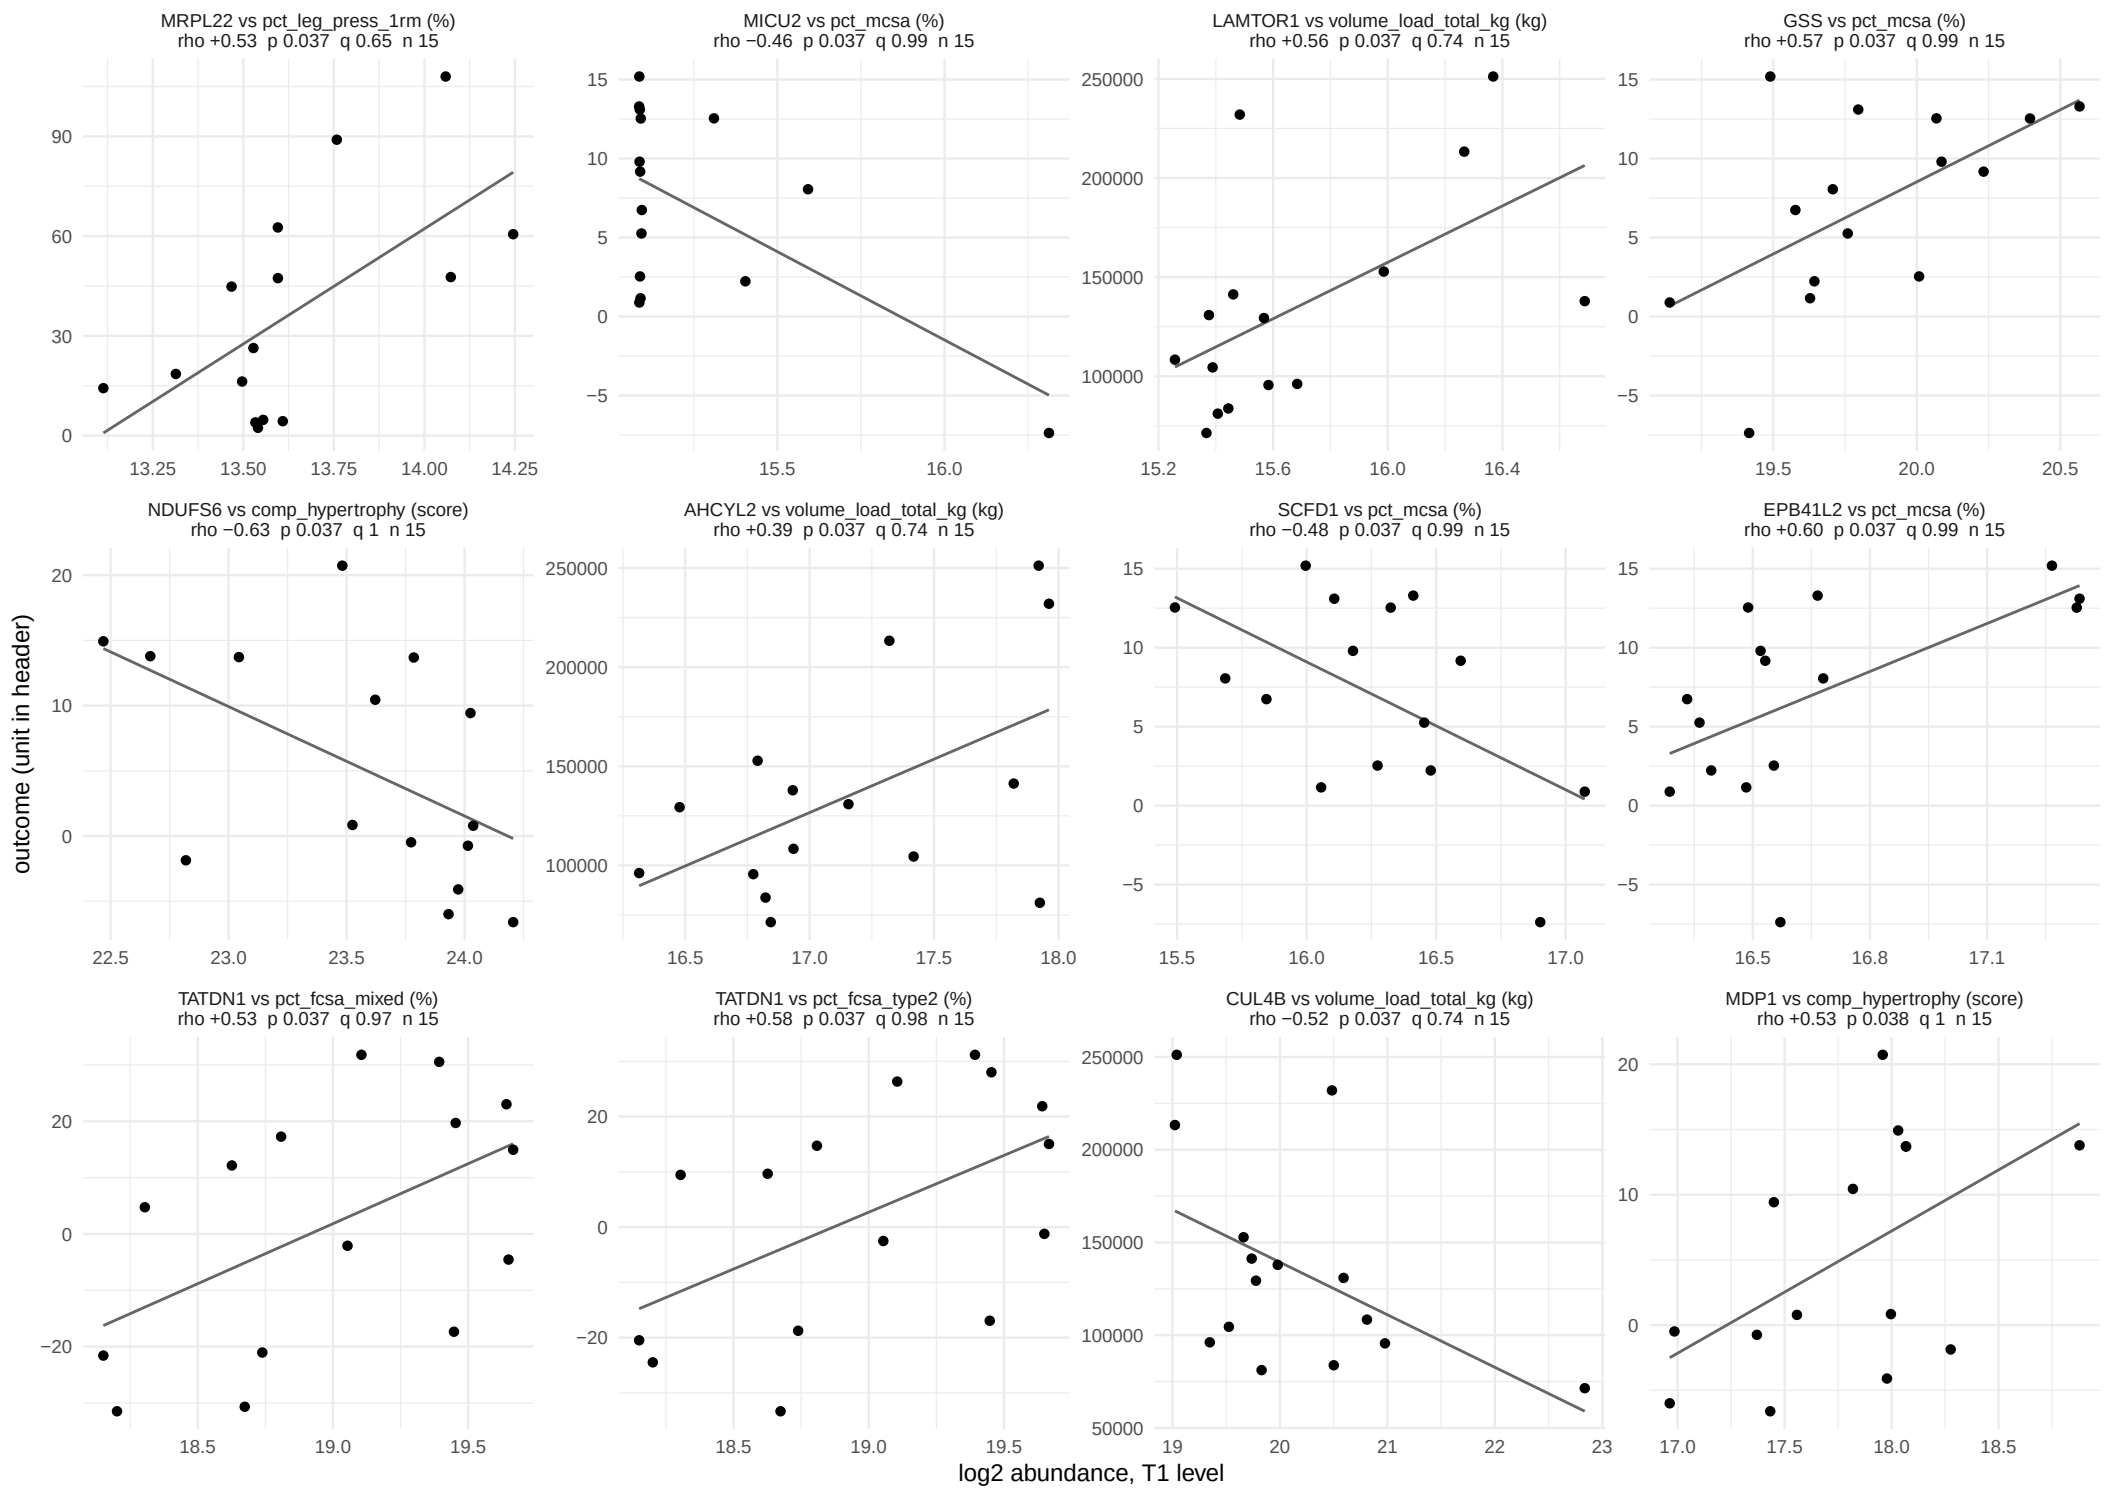

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline window


686 of 15200 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 42 of 58.

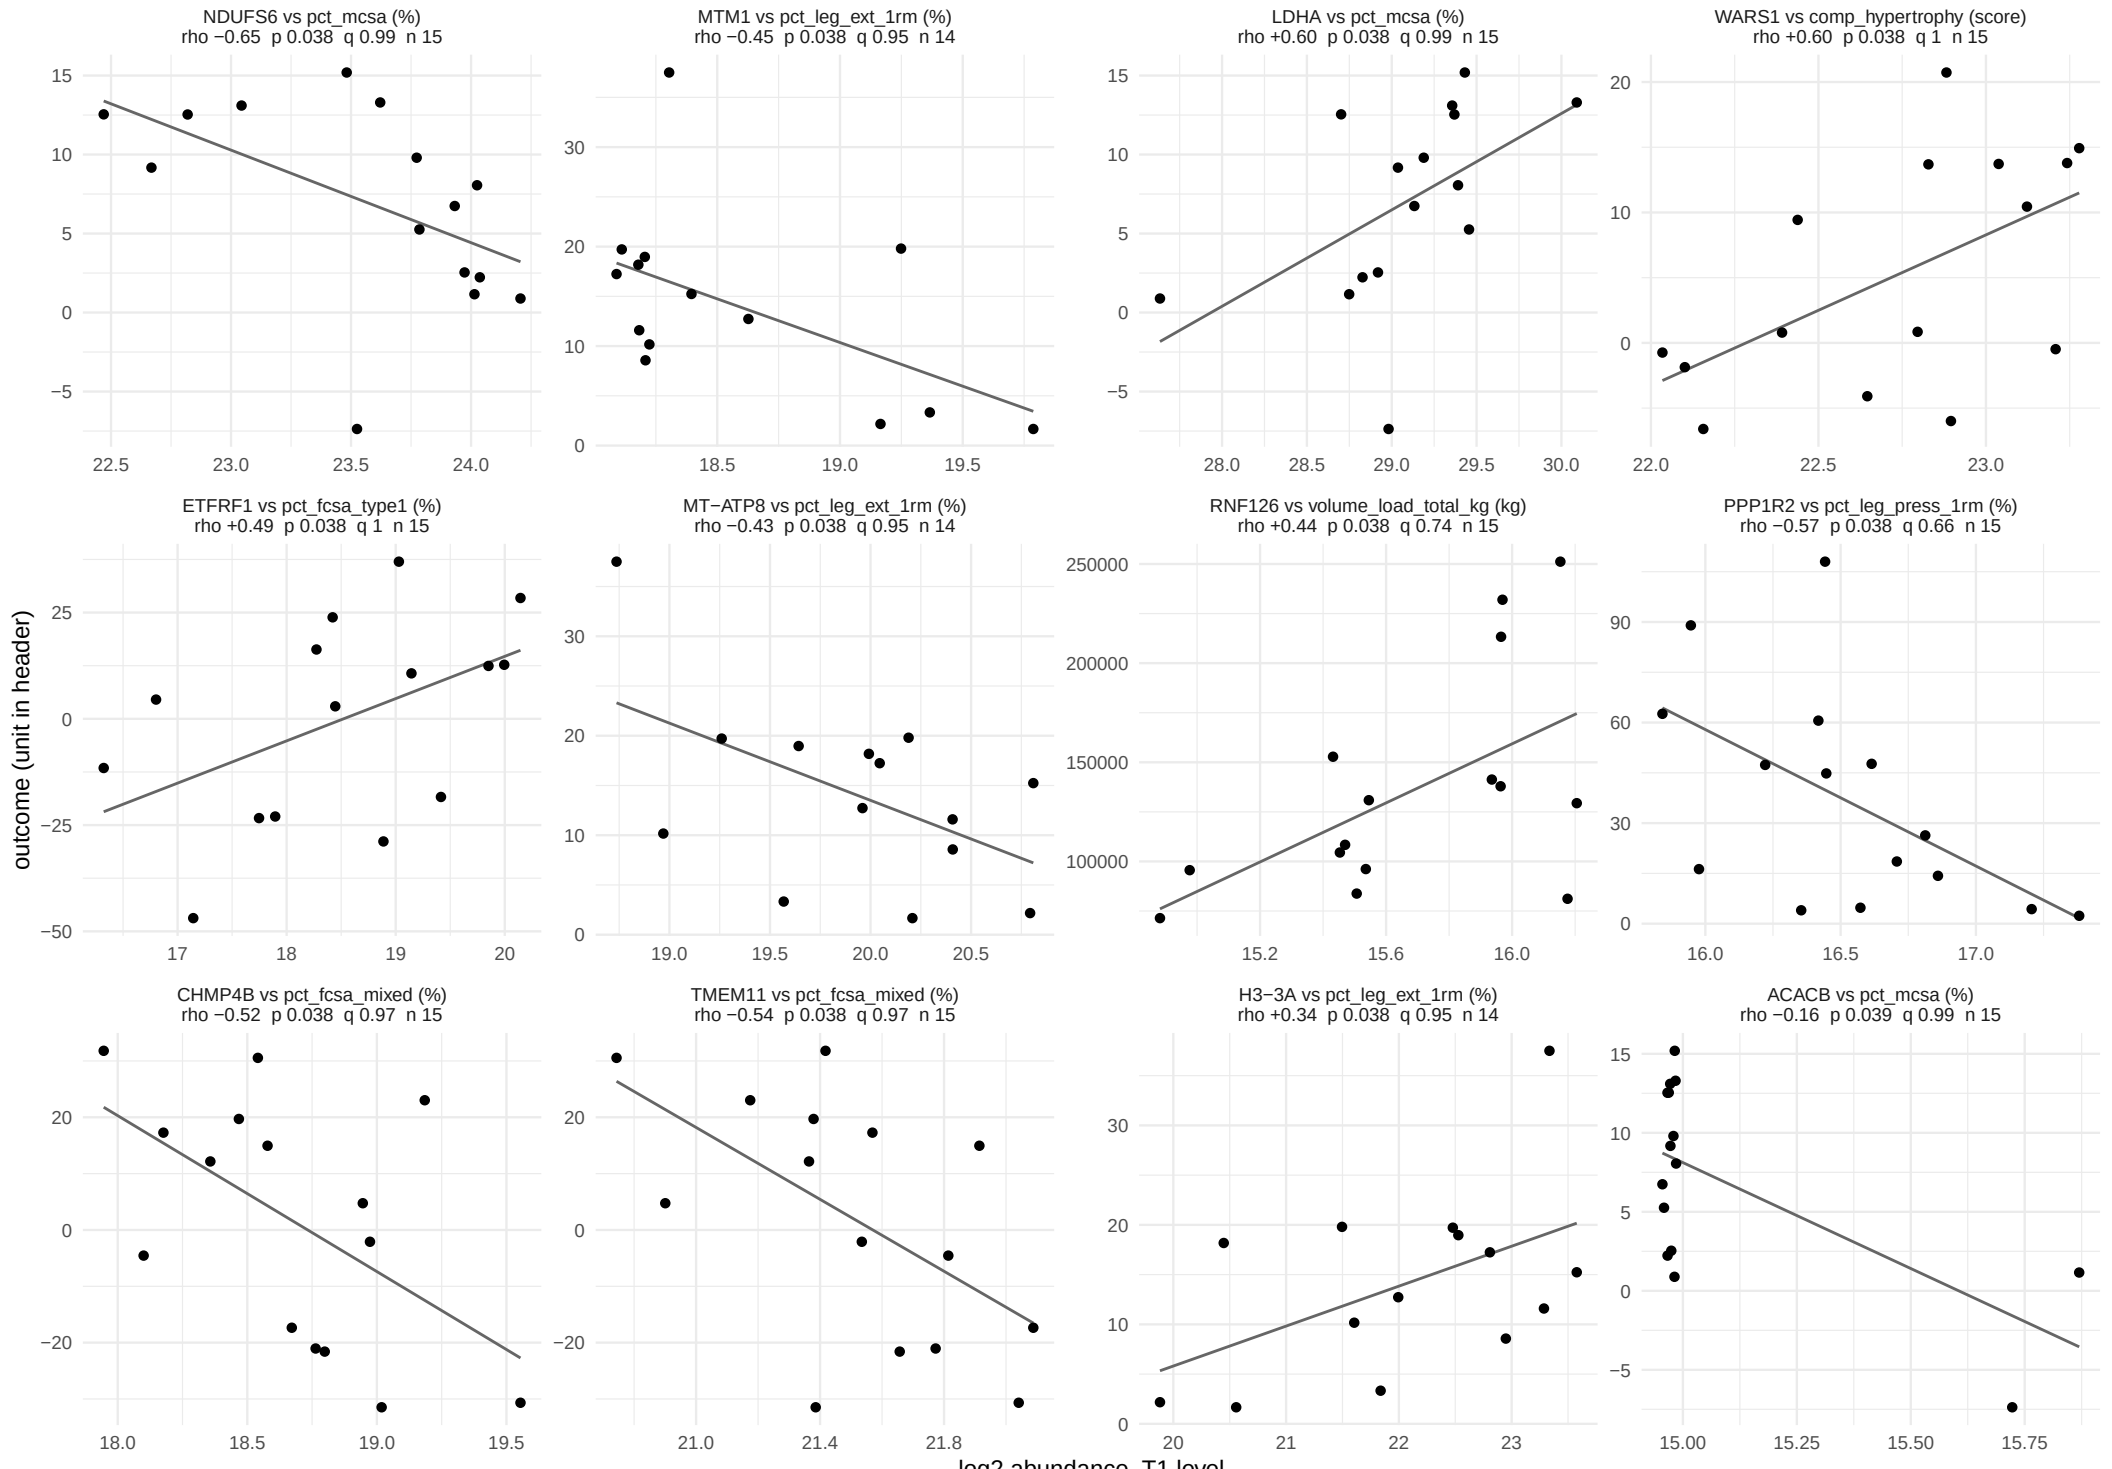

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline window


686 of 15200 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 43 of 58.

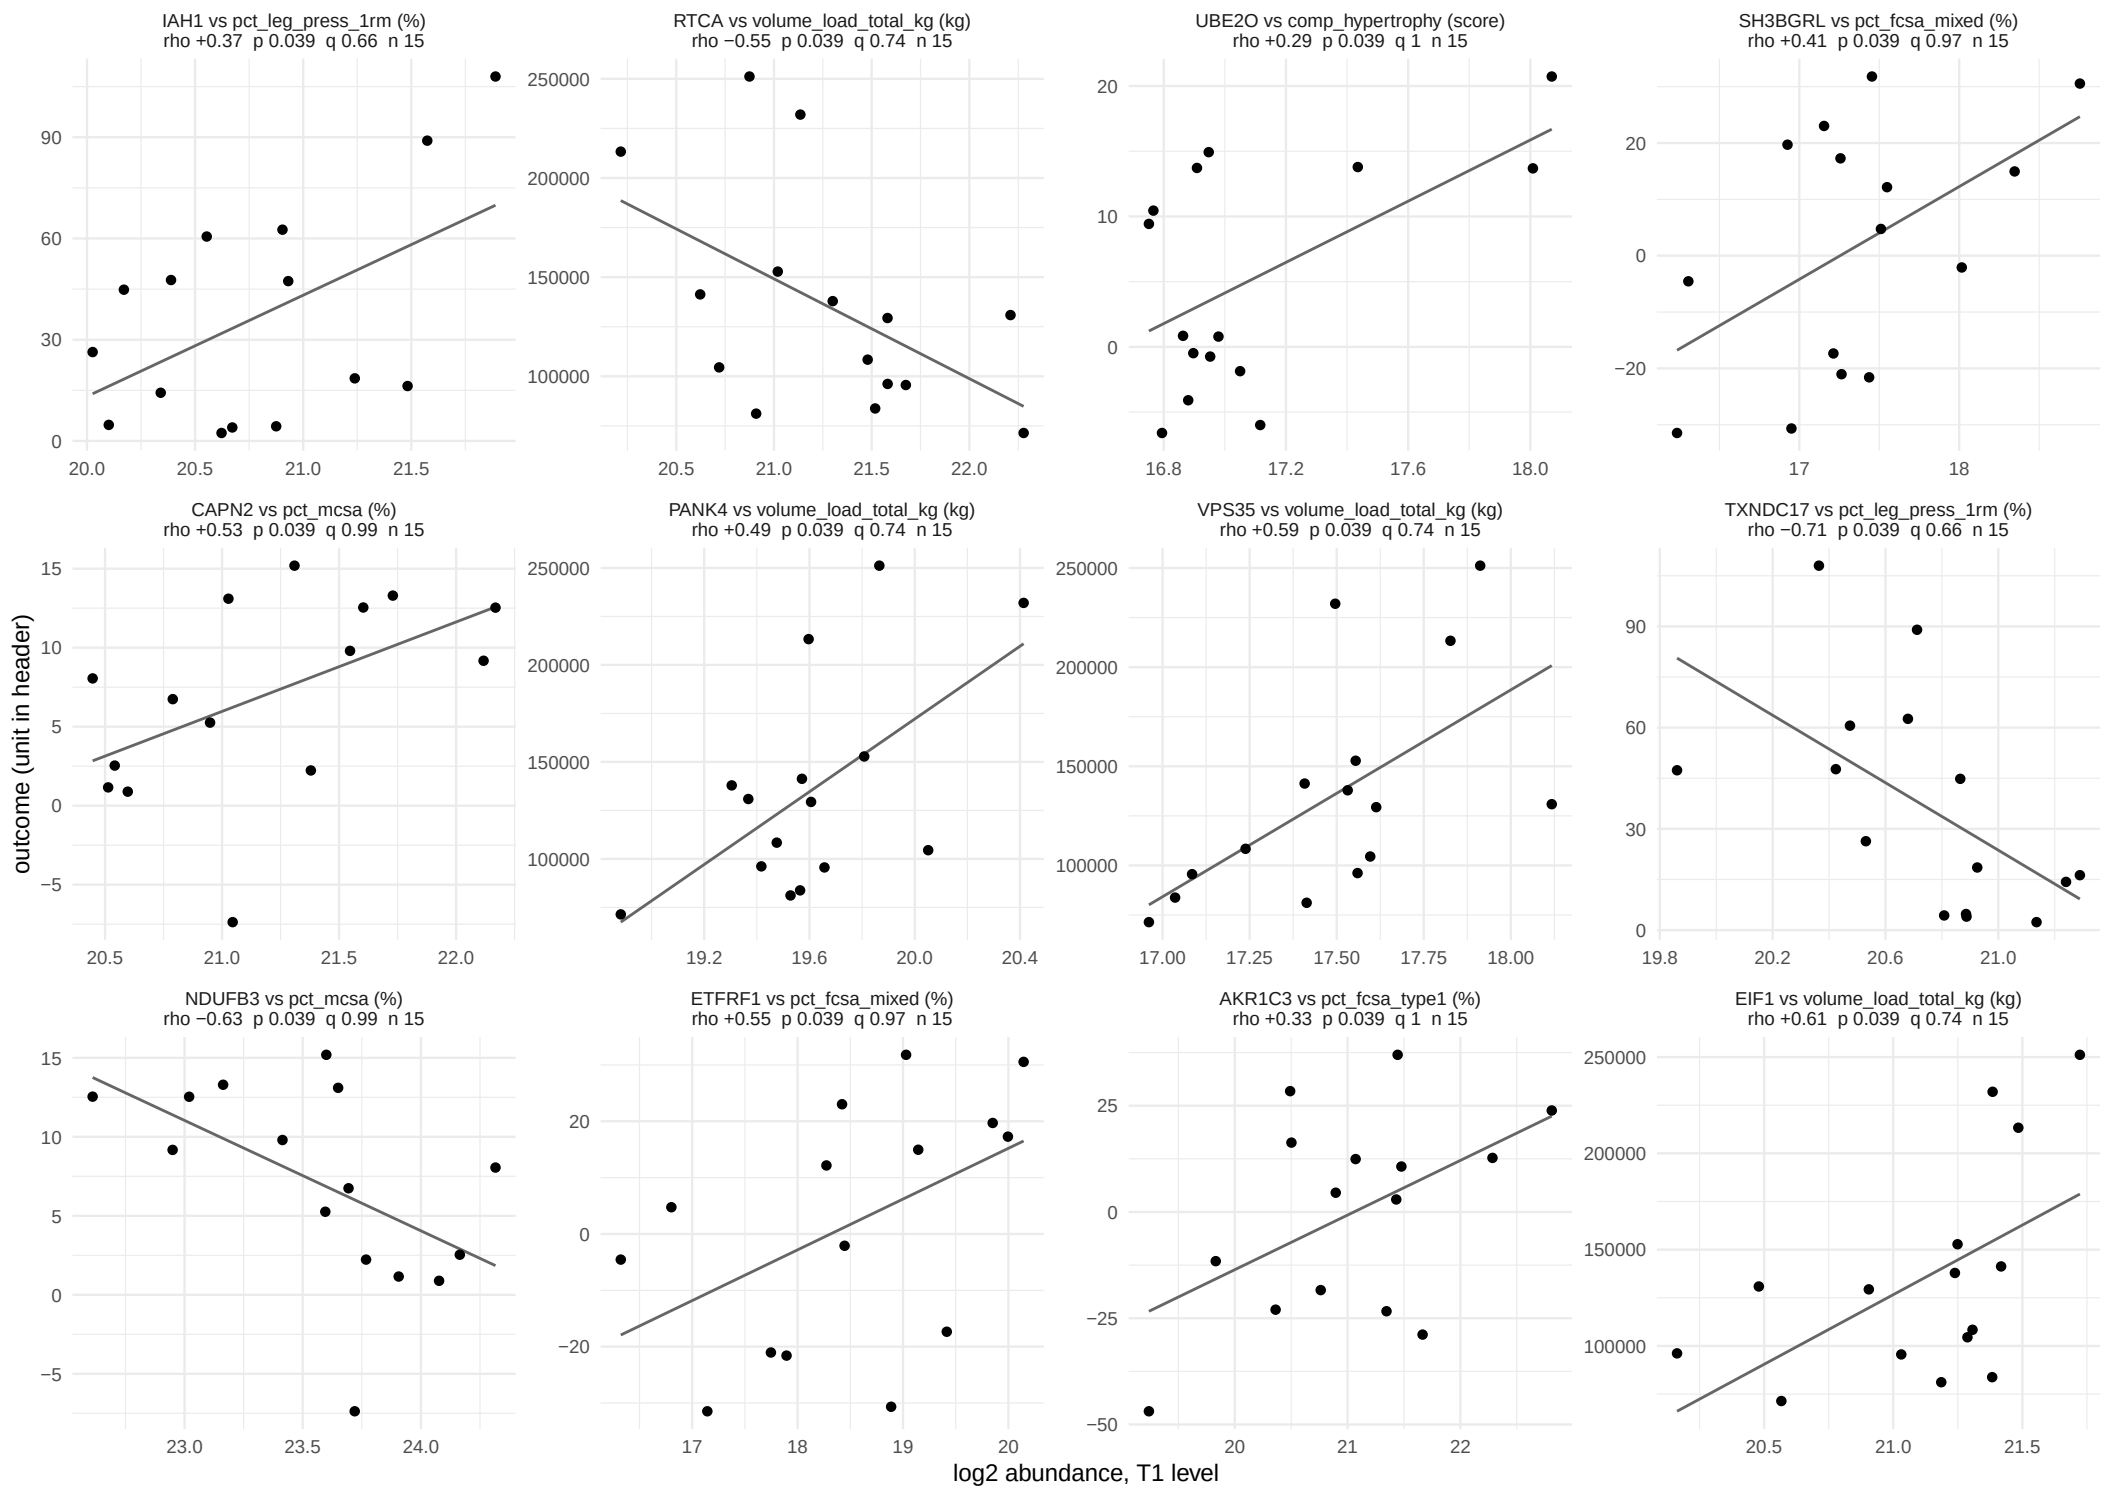

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline window


686 of 15200 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 44 of 58.

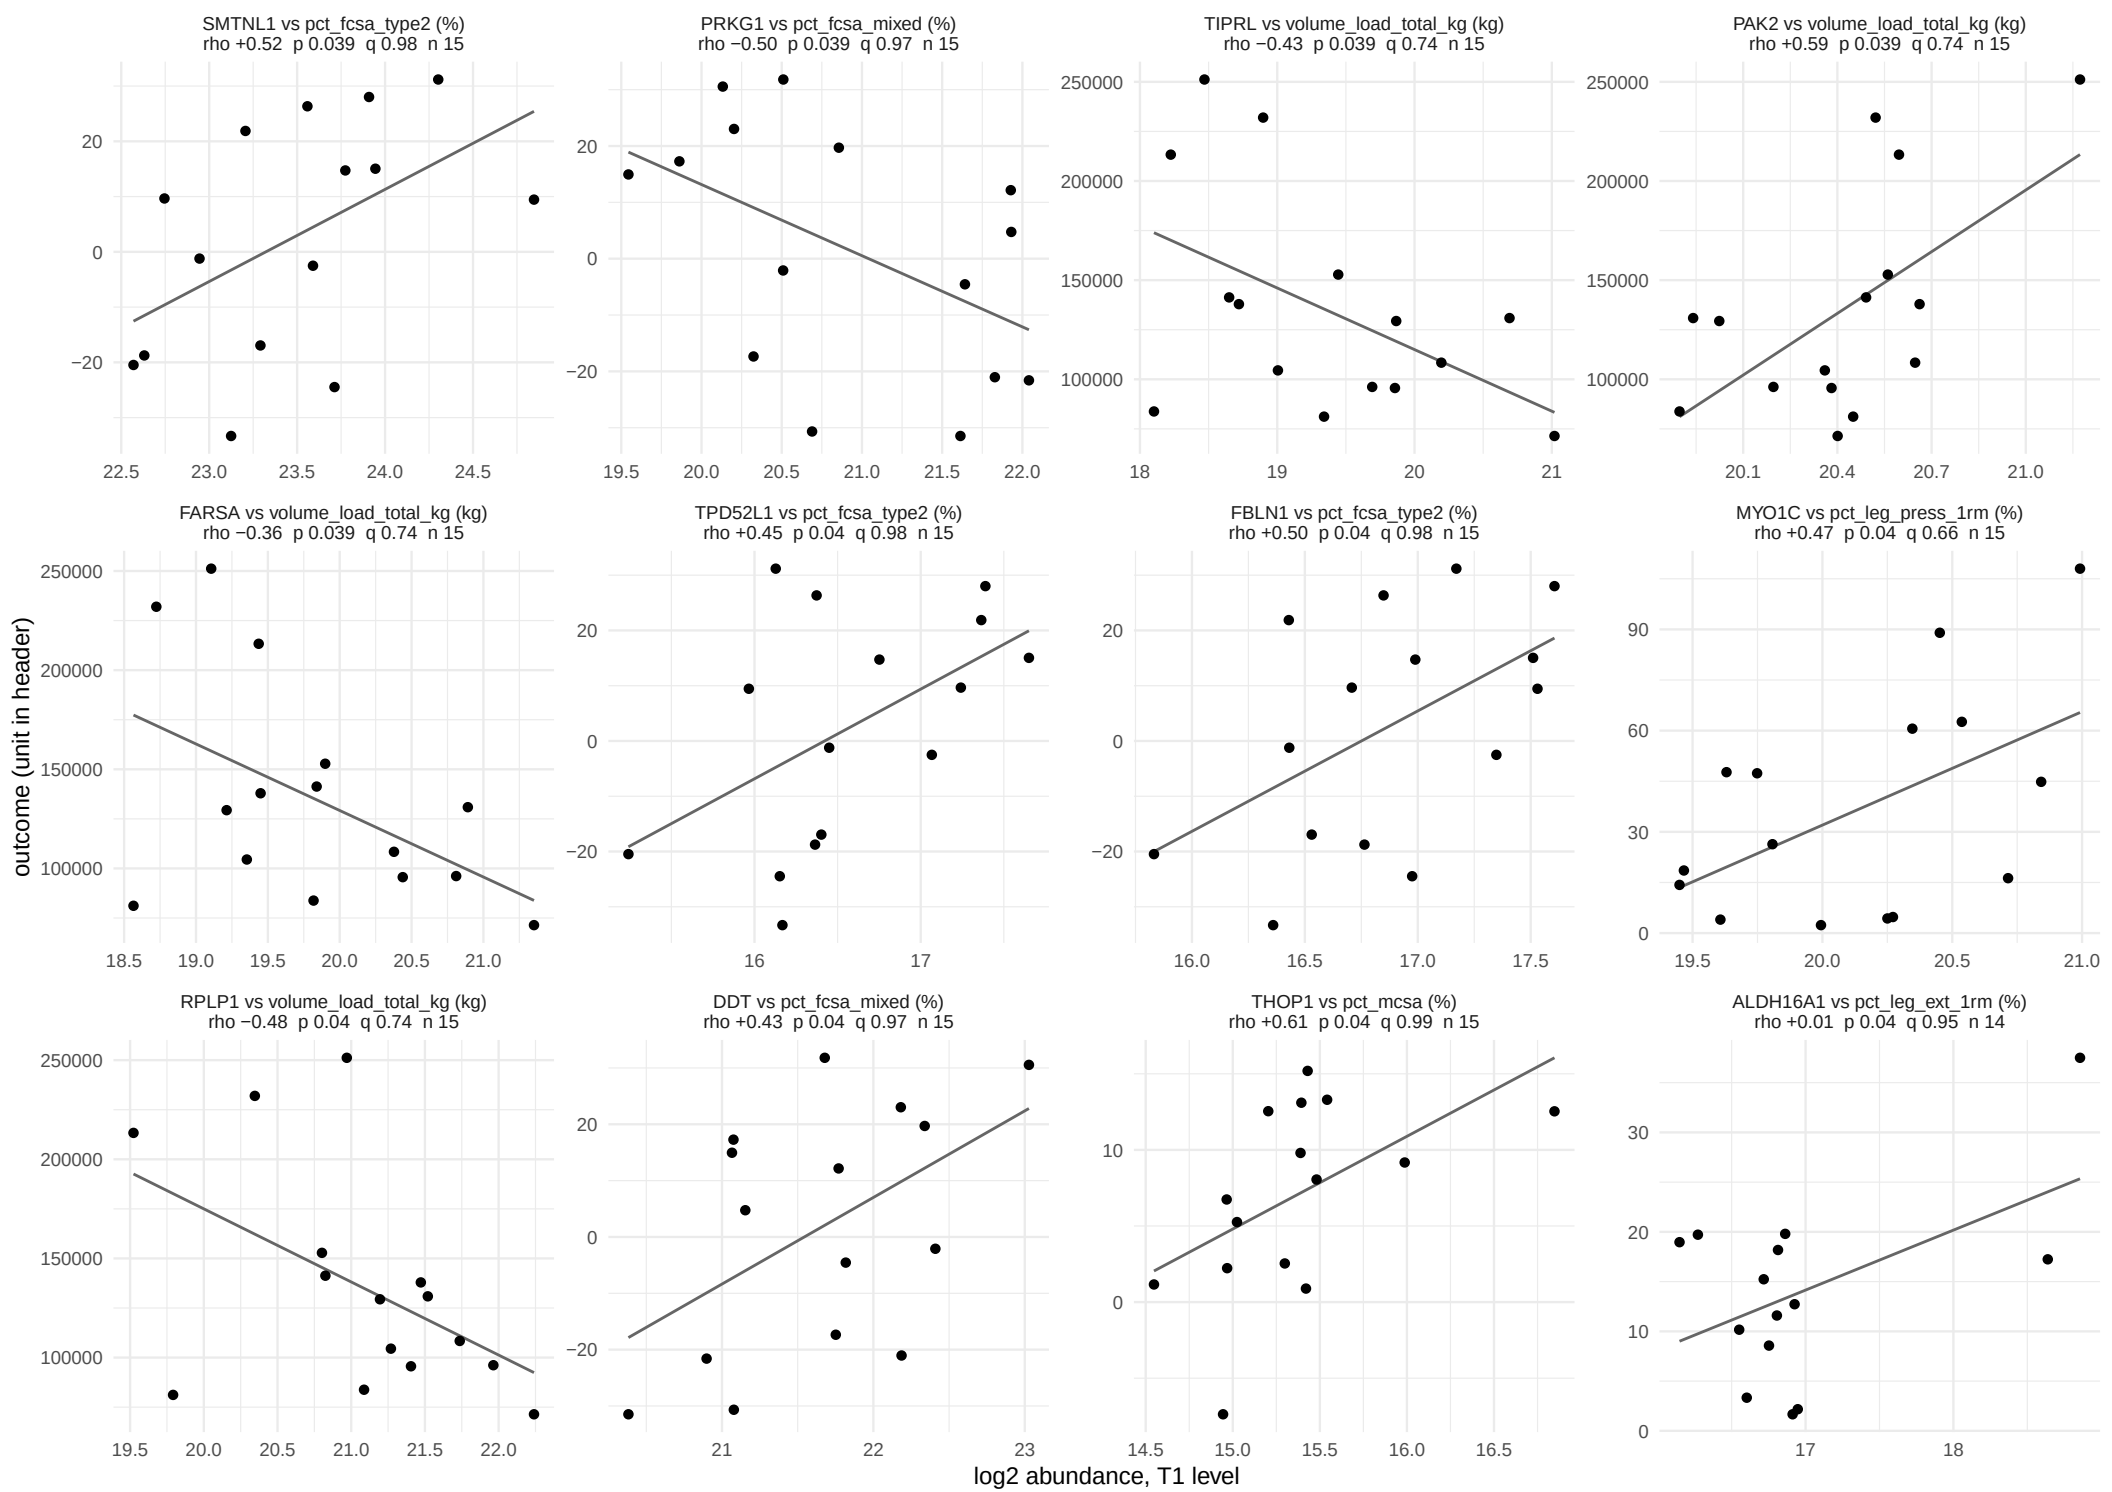

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline window


686 of 15200 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 45 of 58.

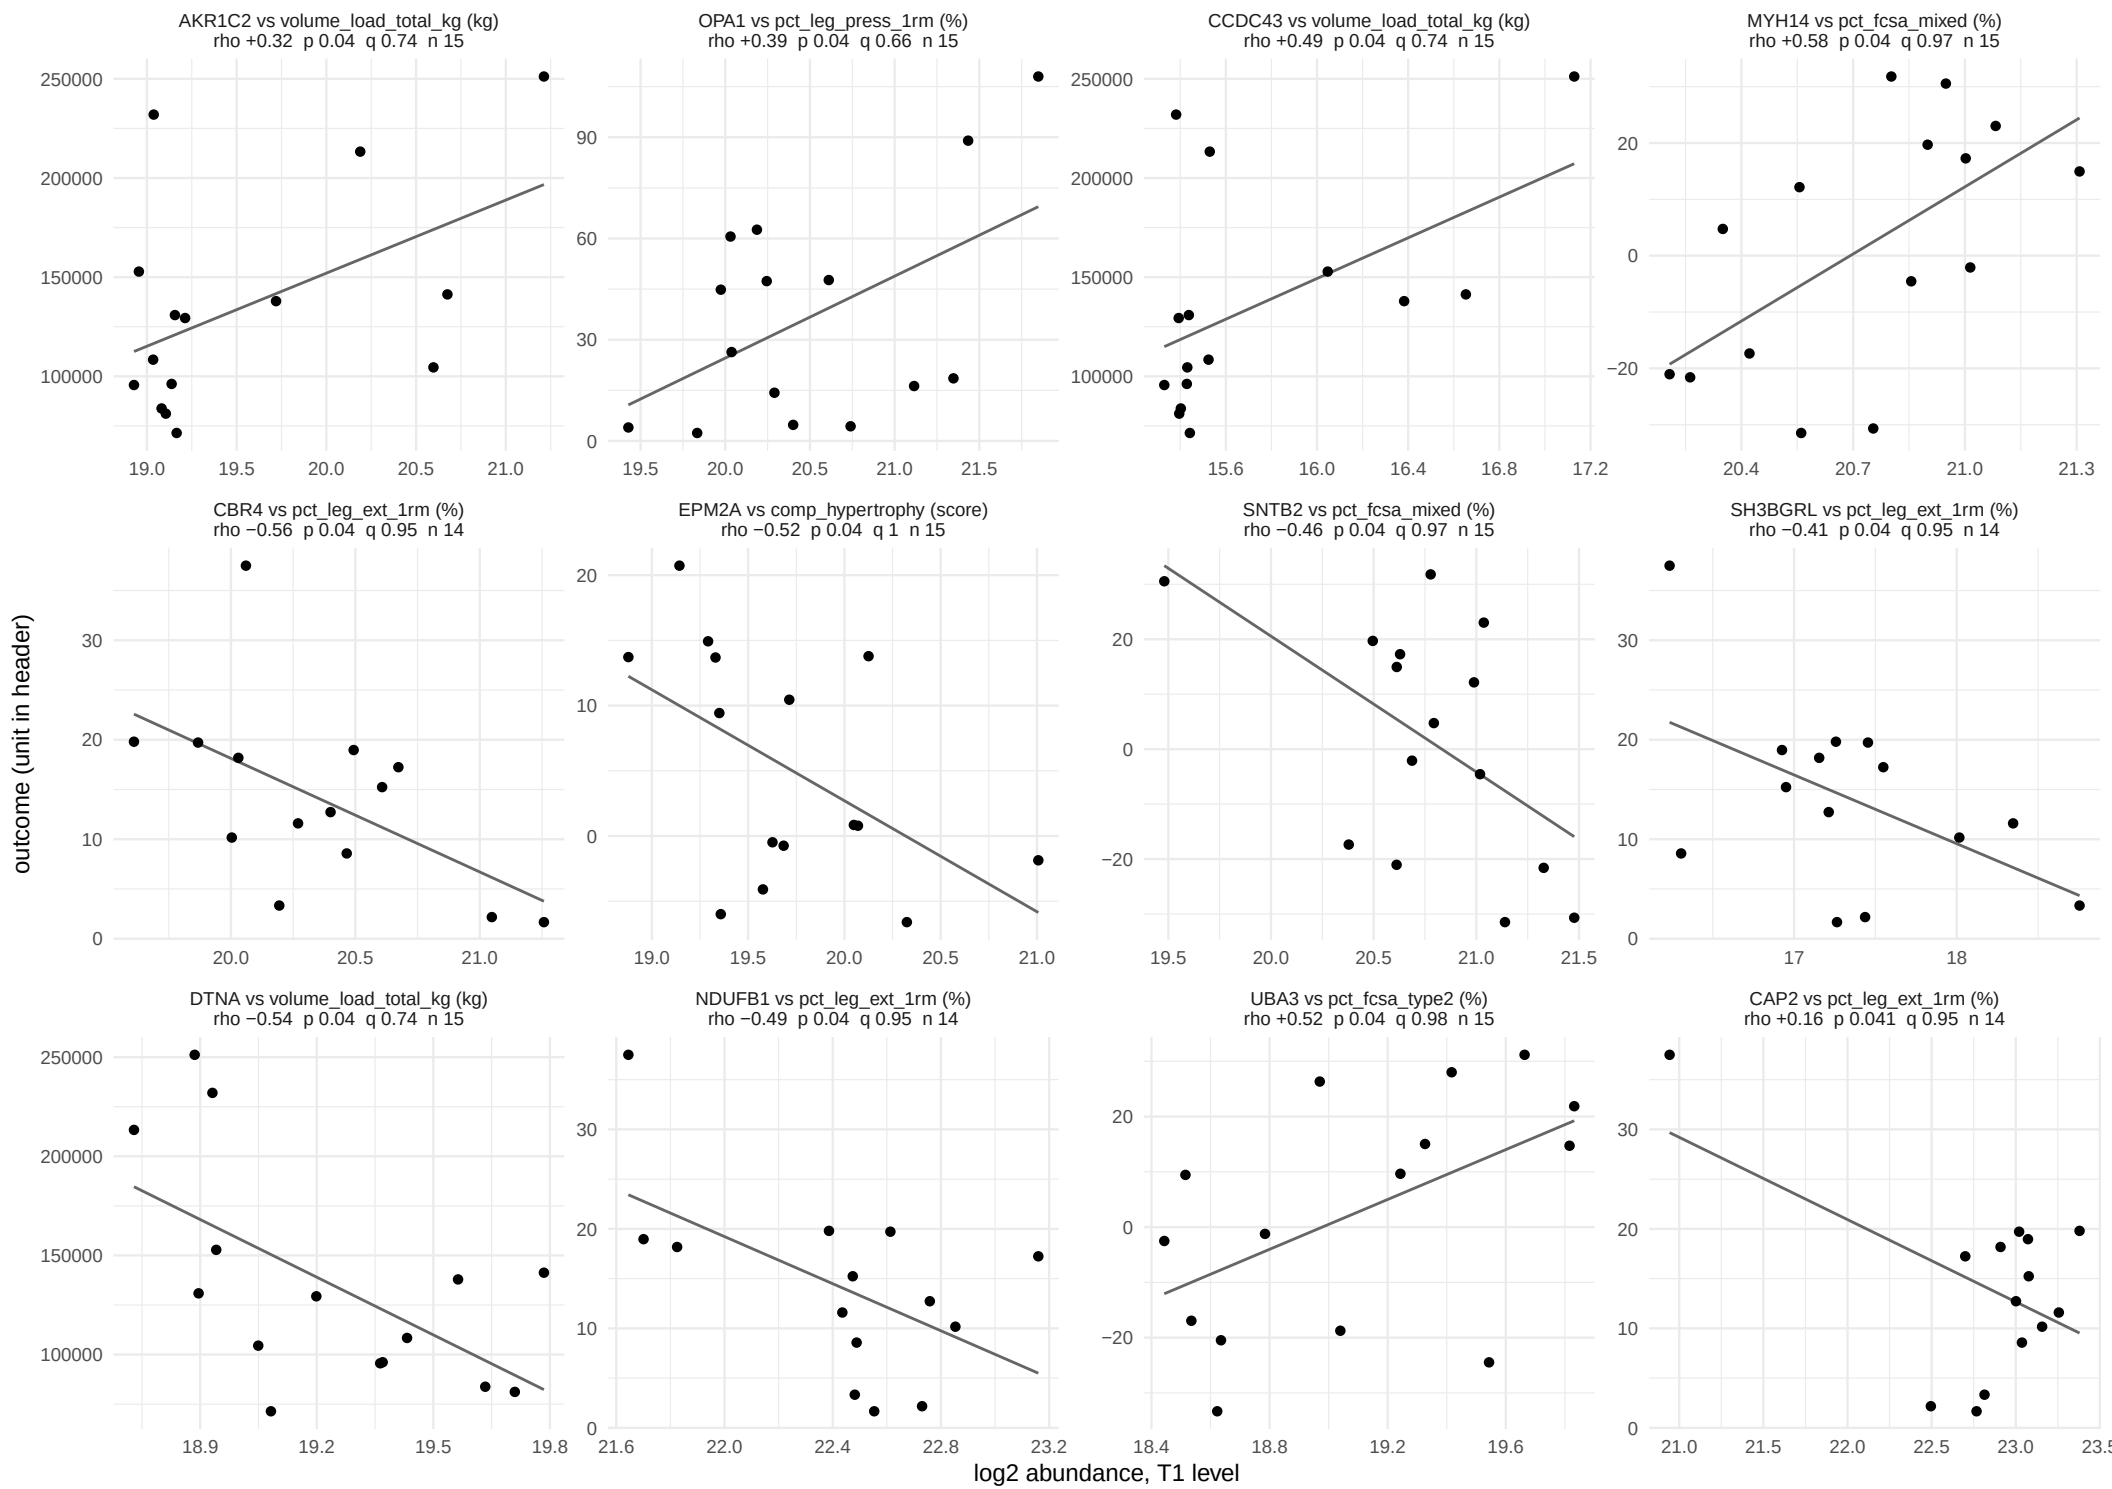

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline window


686 of 15200 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 46 of 58.

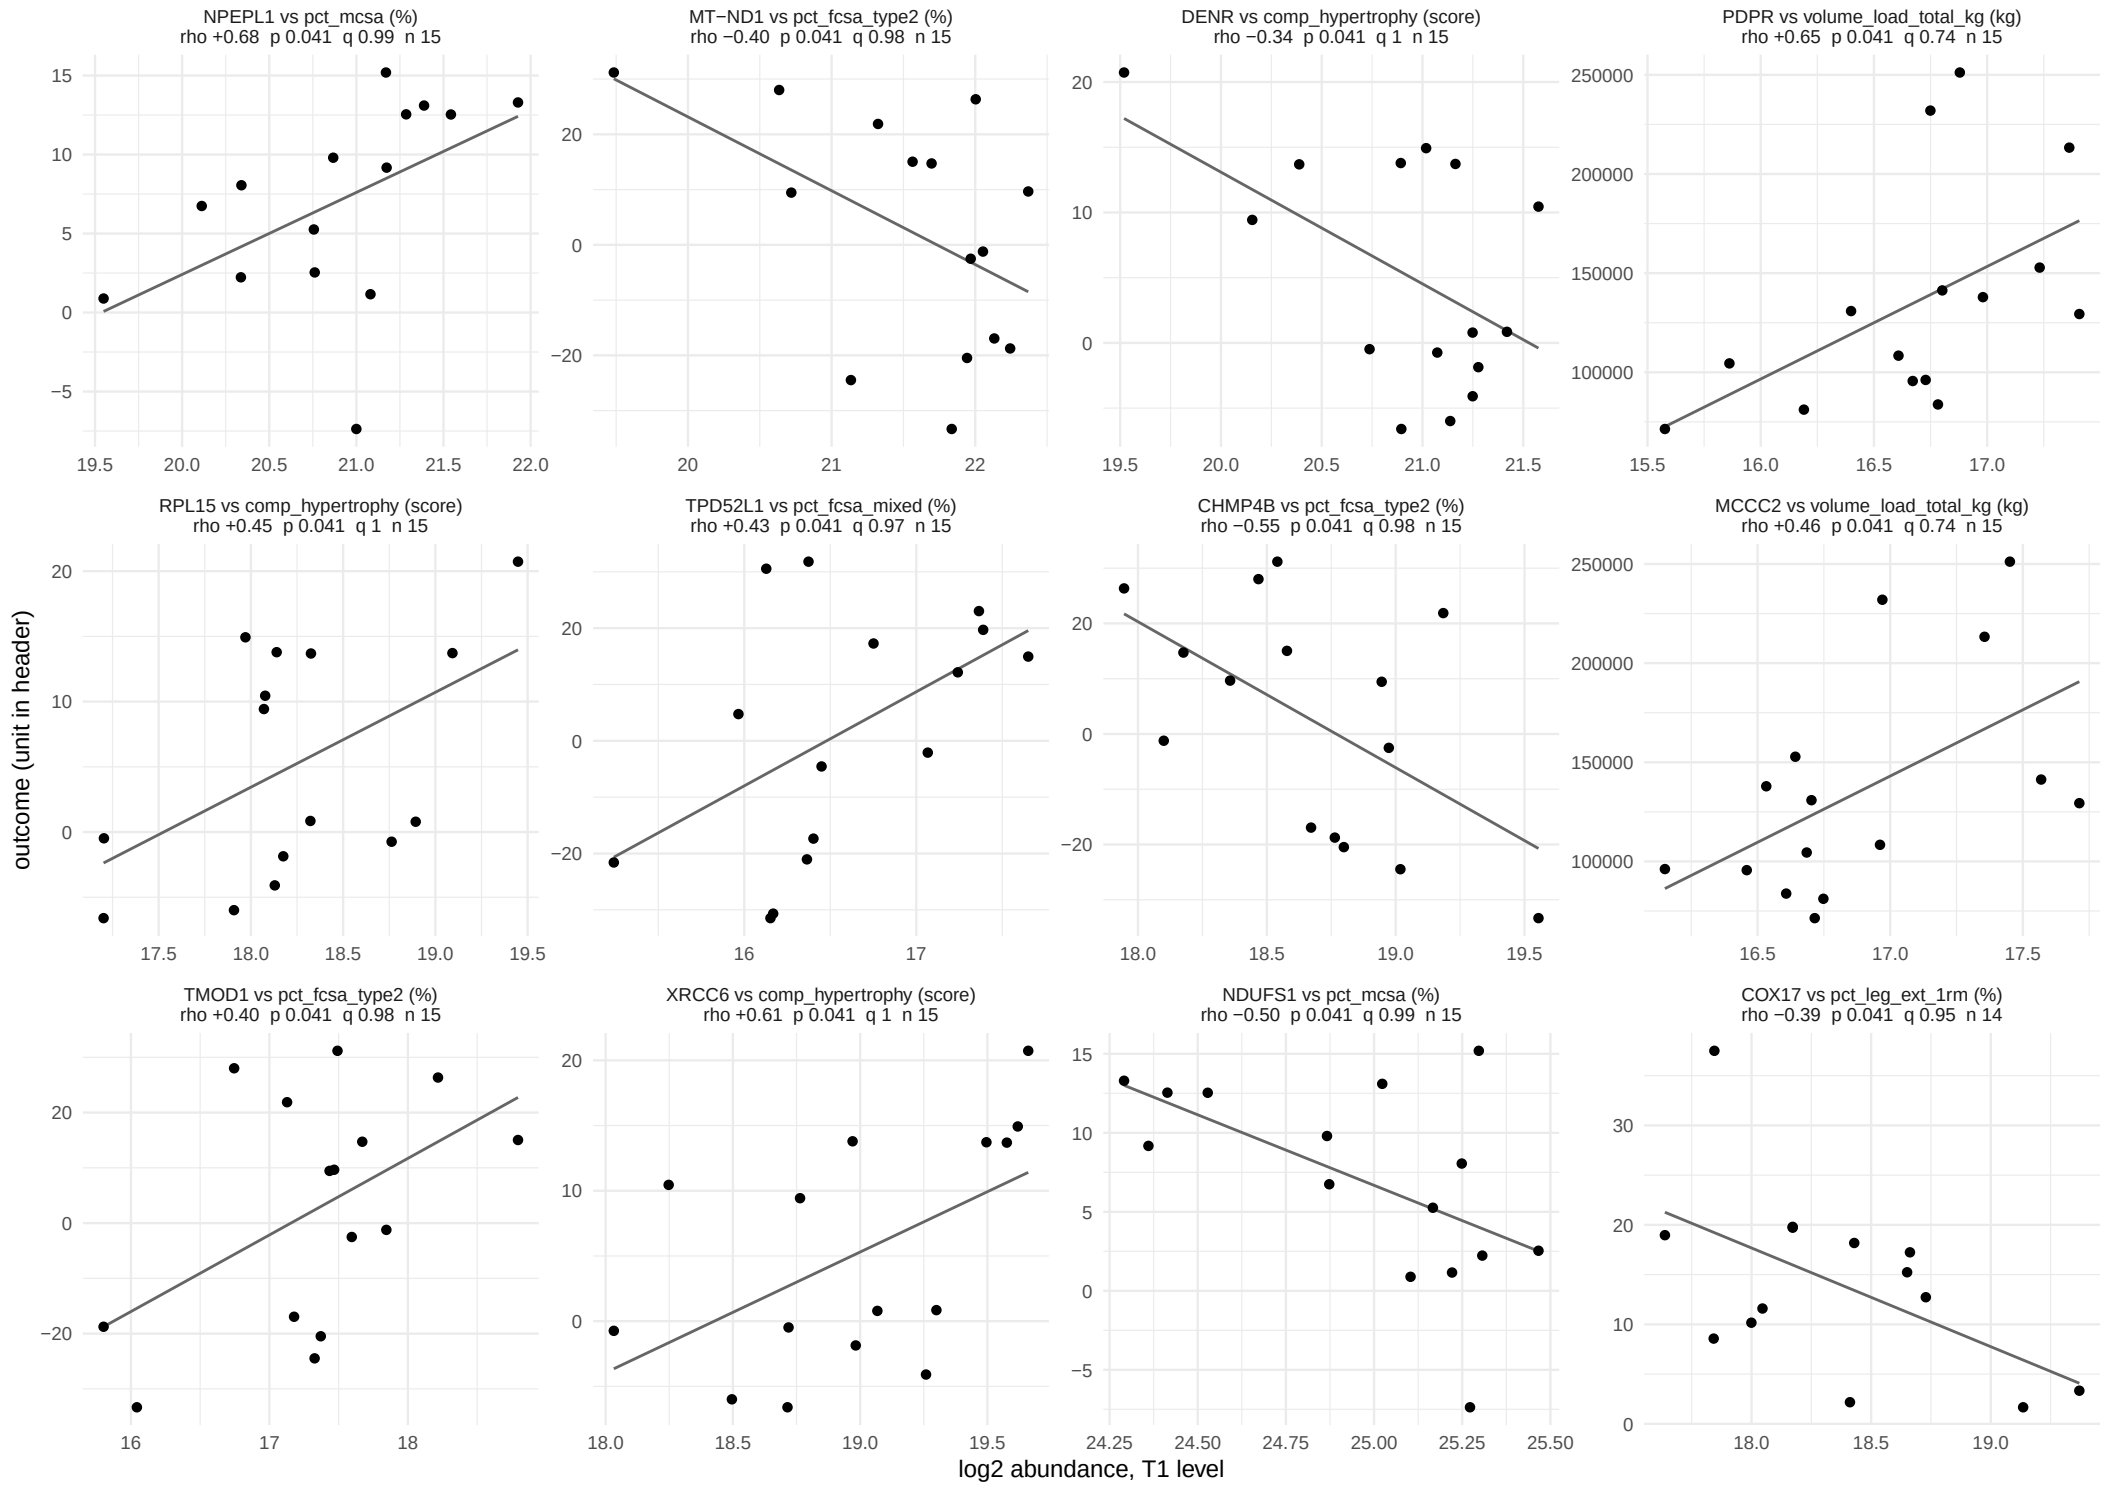

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline window


686 of 15200 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 47 of 58.

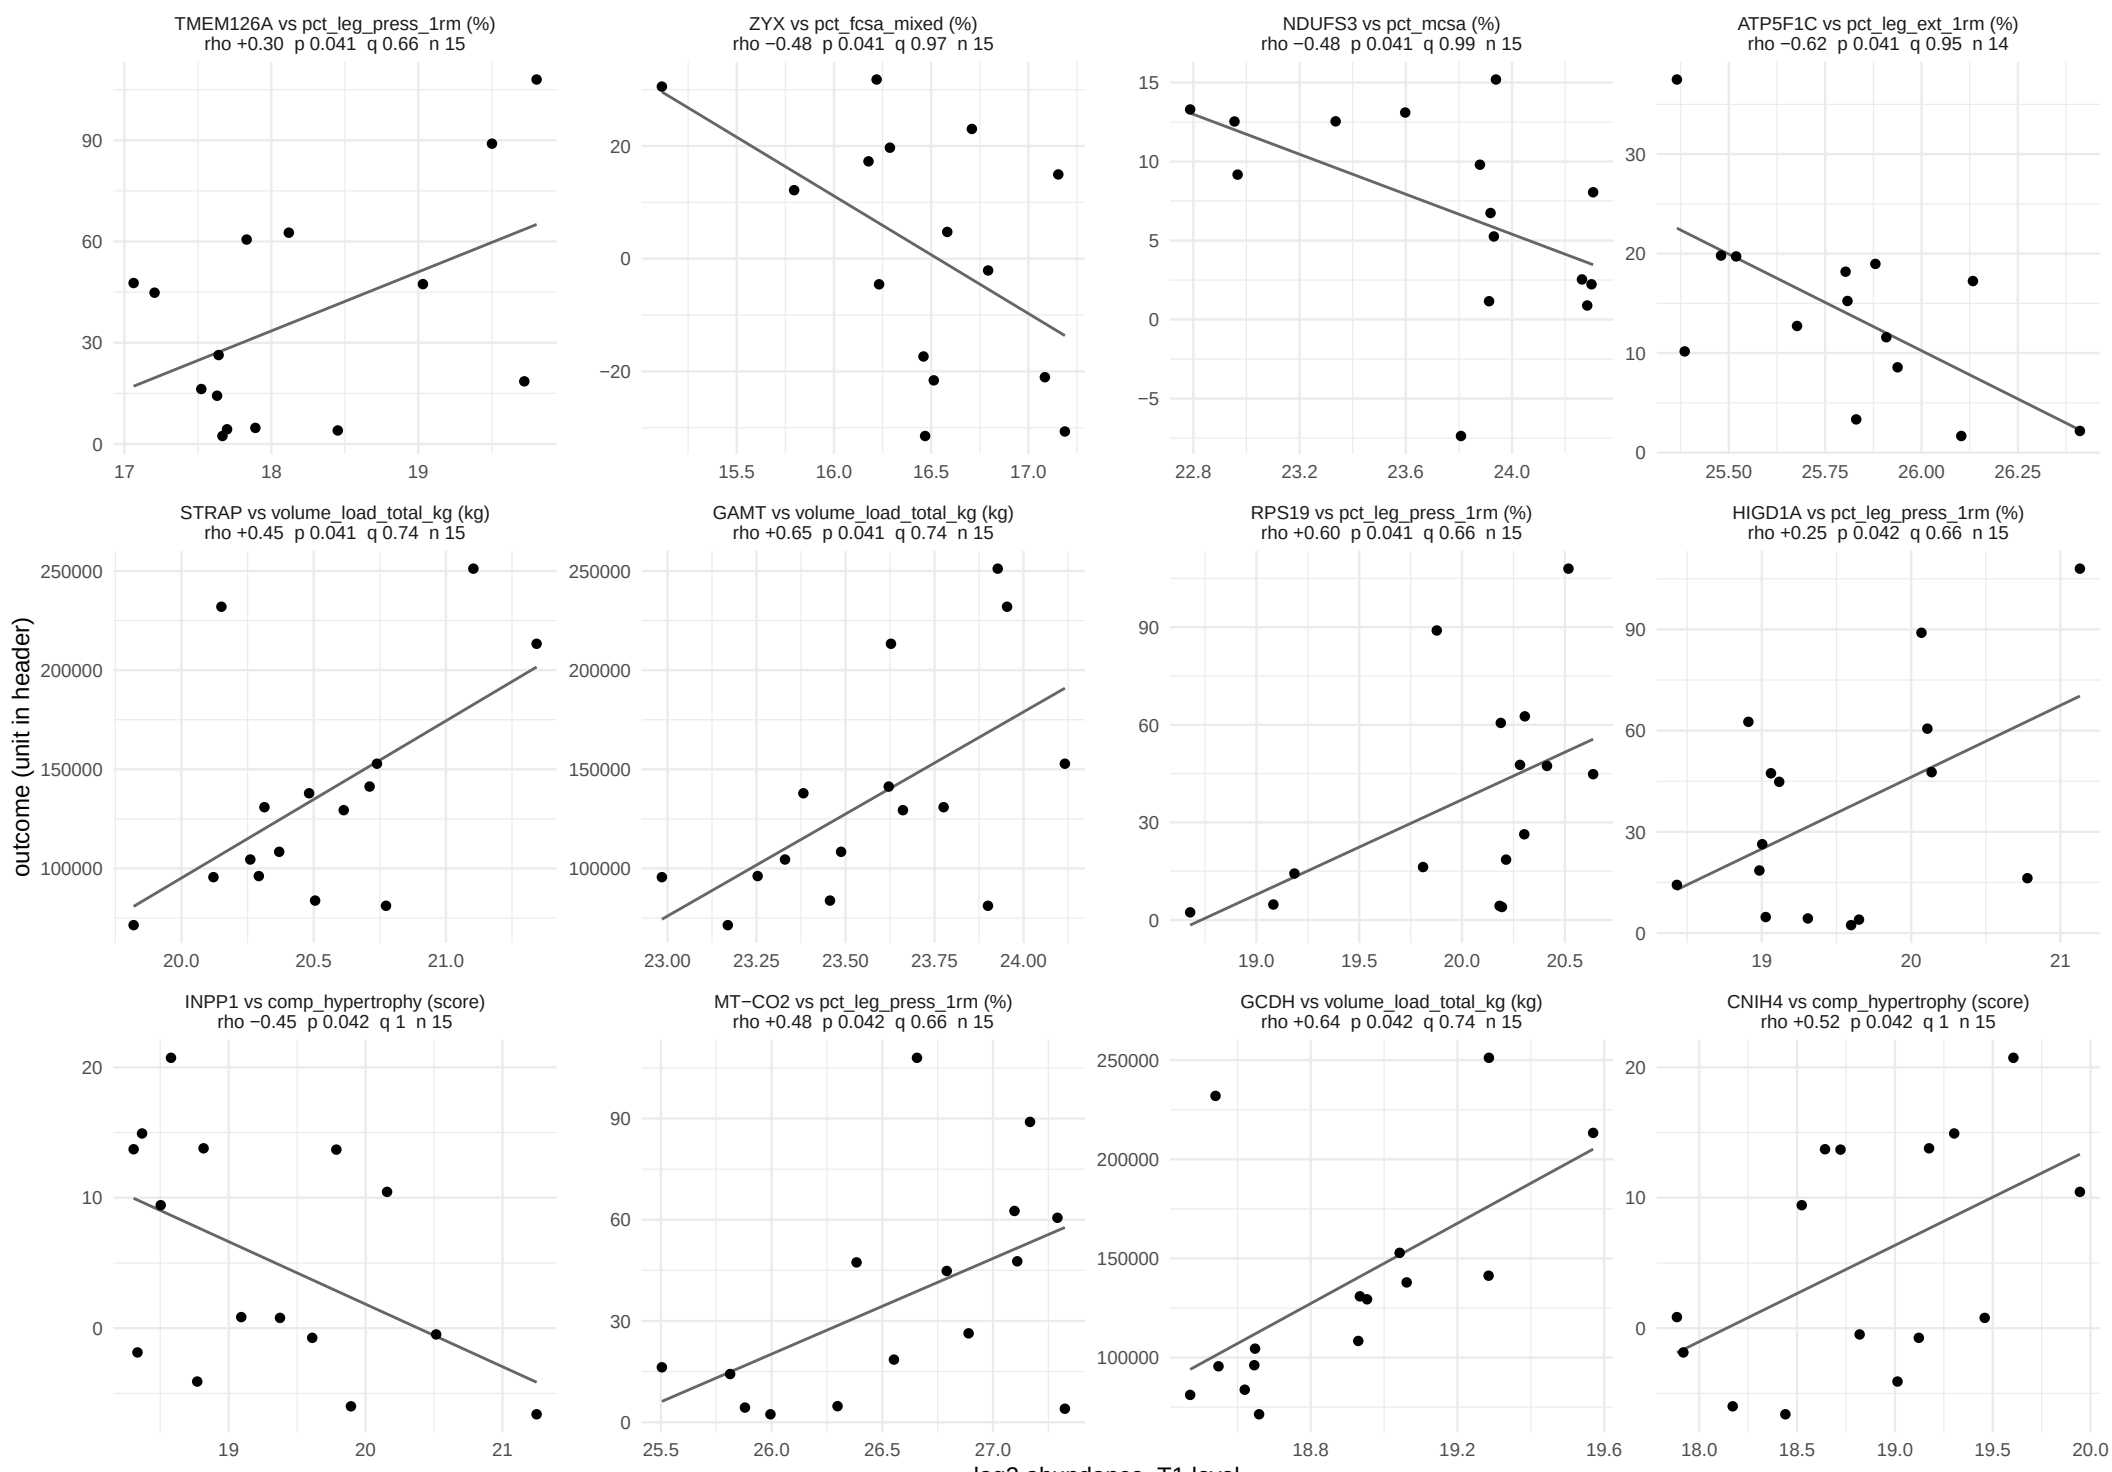

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline window


686 of 15200 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 48 of 58.

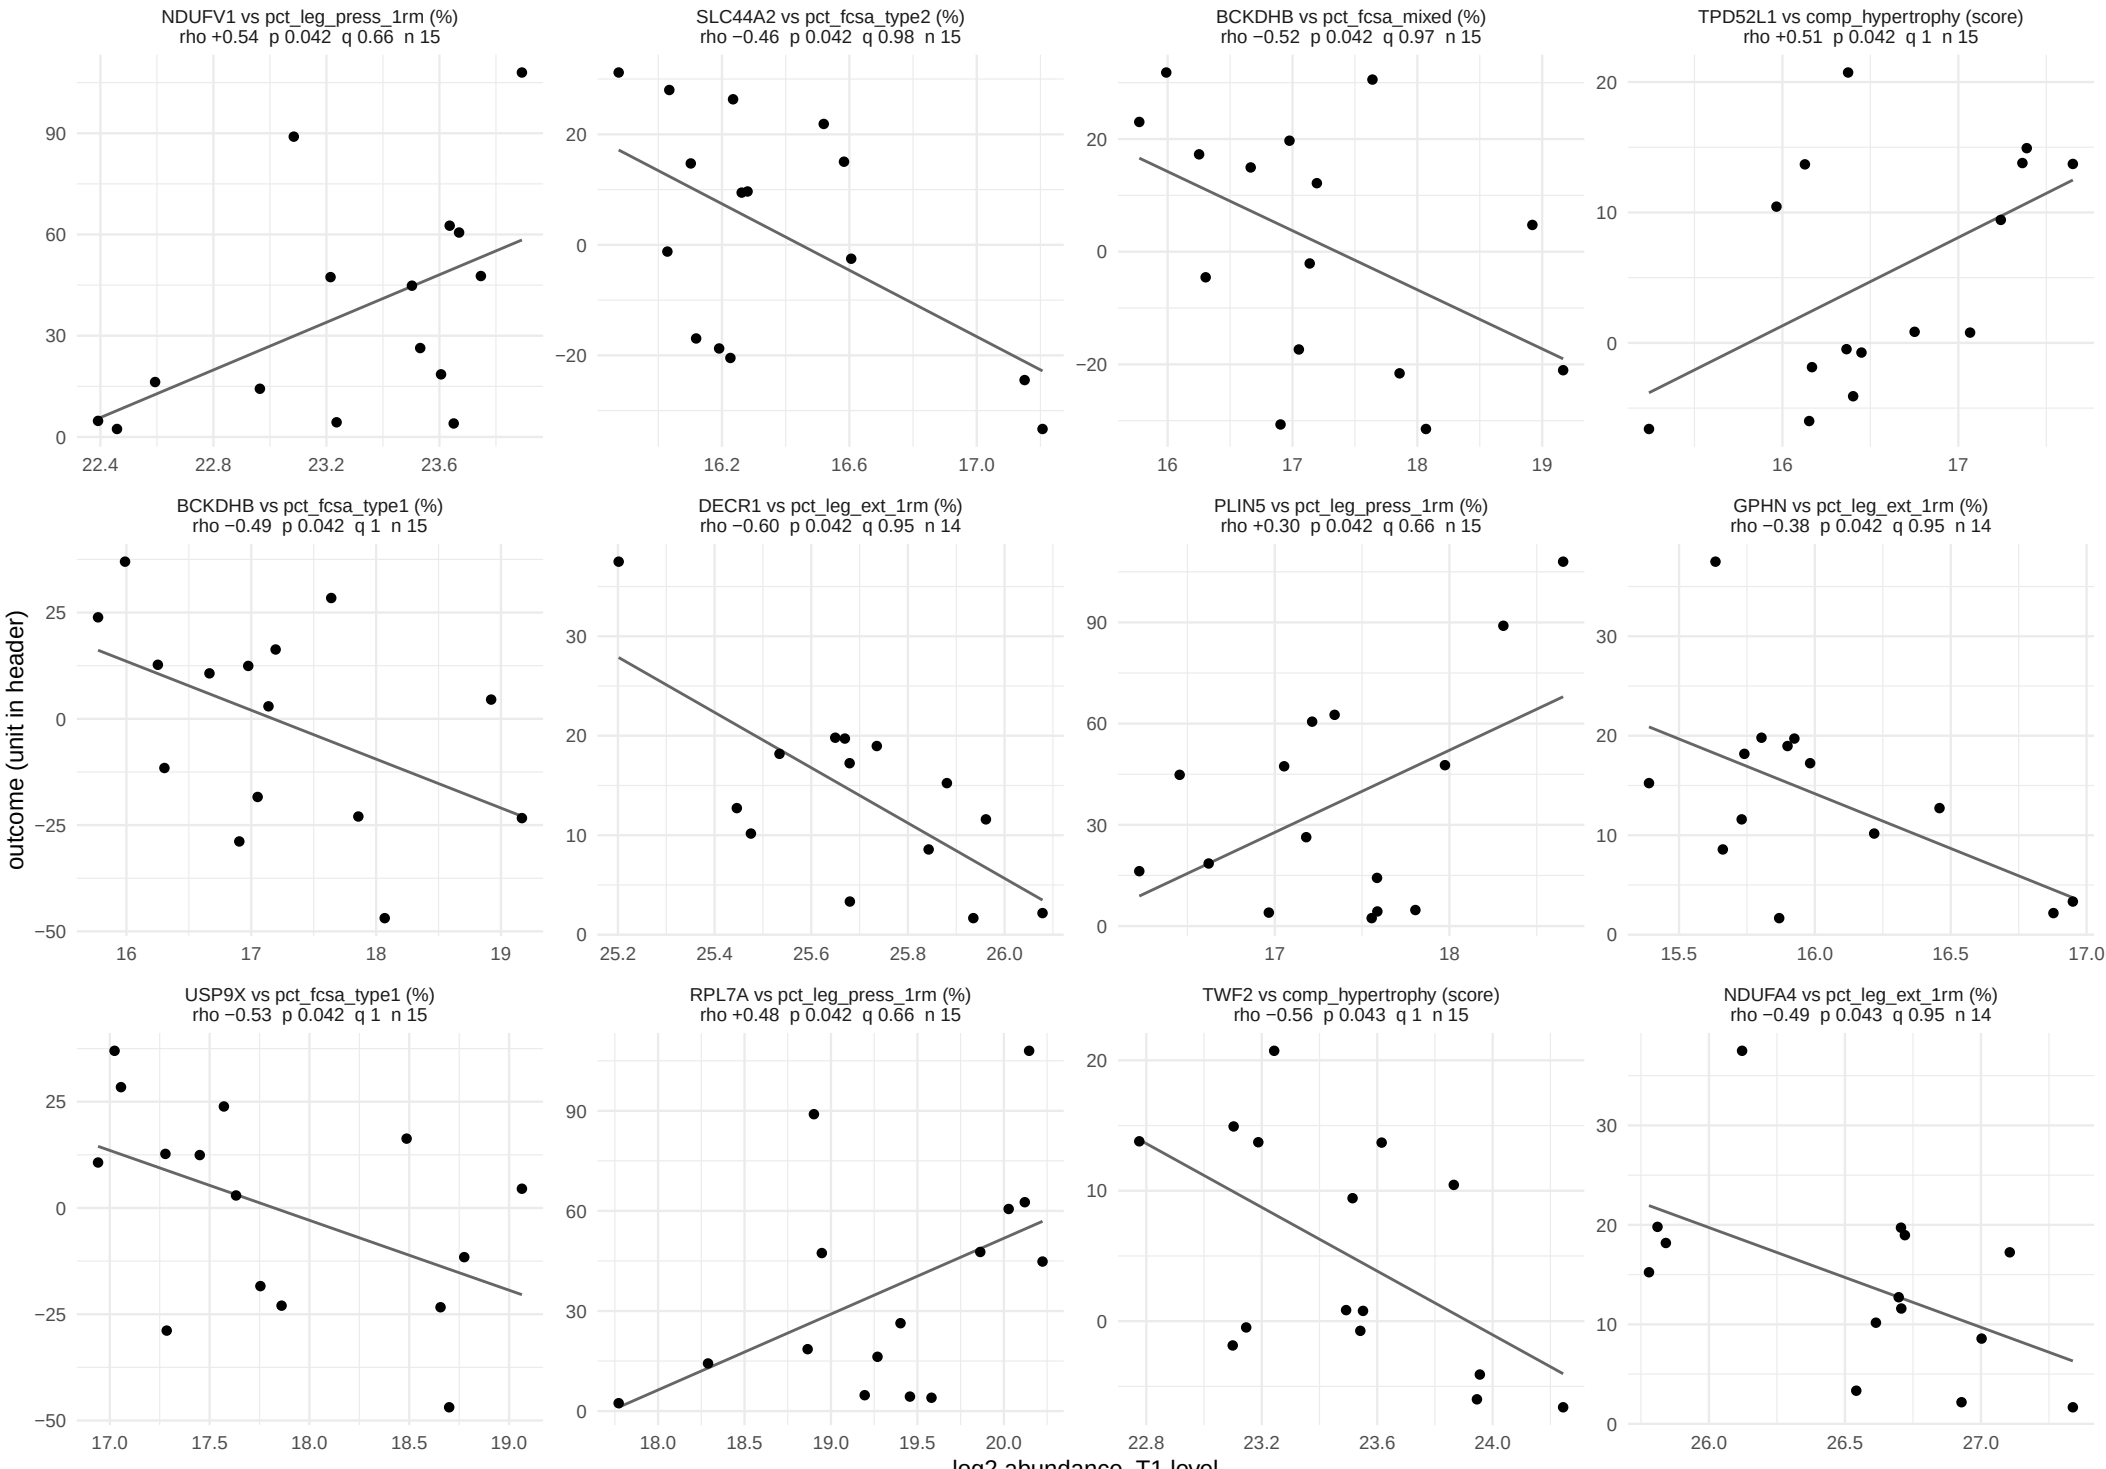

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline window


686 of 15200 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 49 of 58.

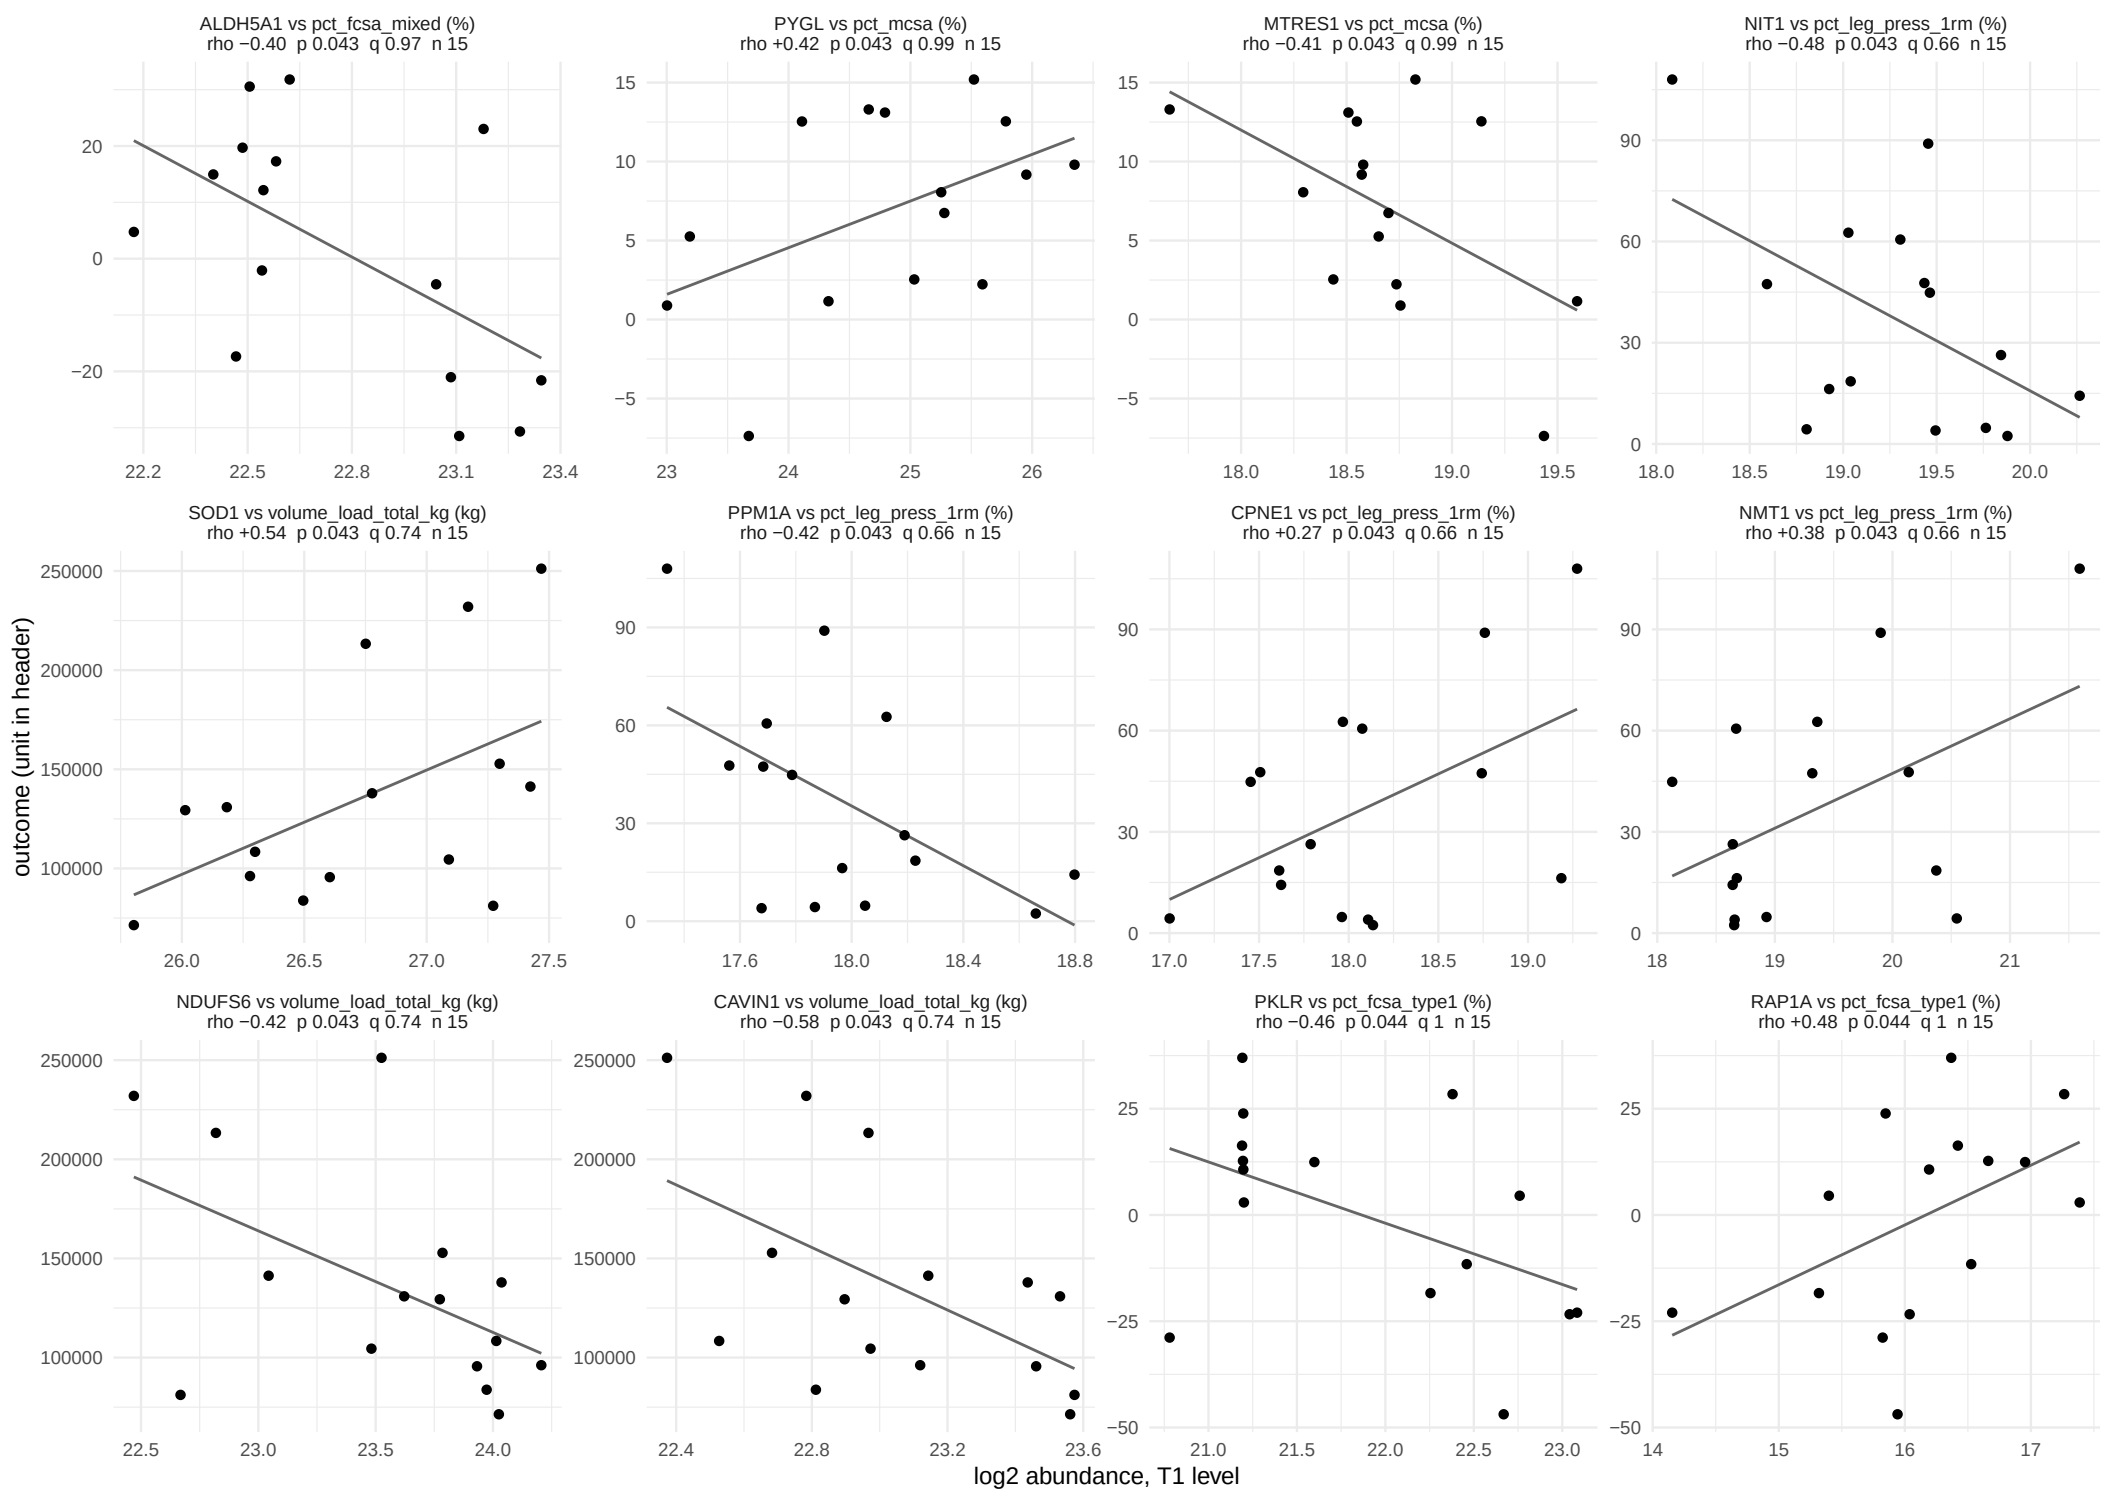

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline window


686 of 15200 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 50 of 58.

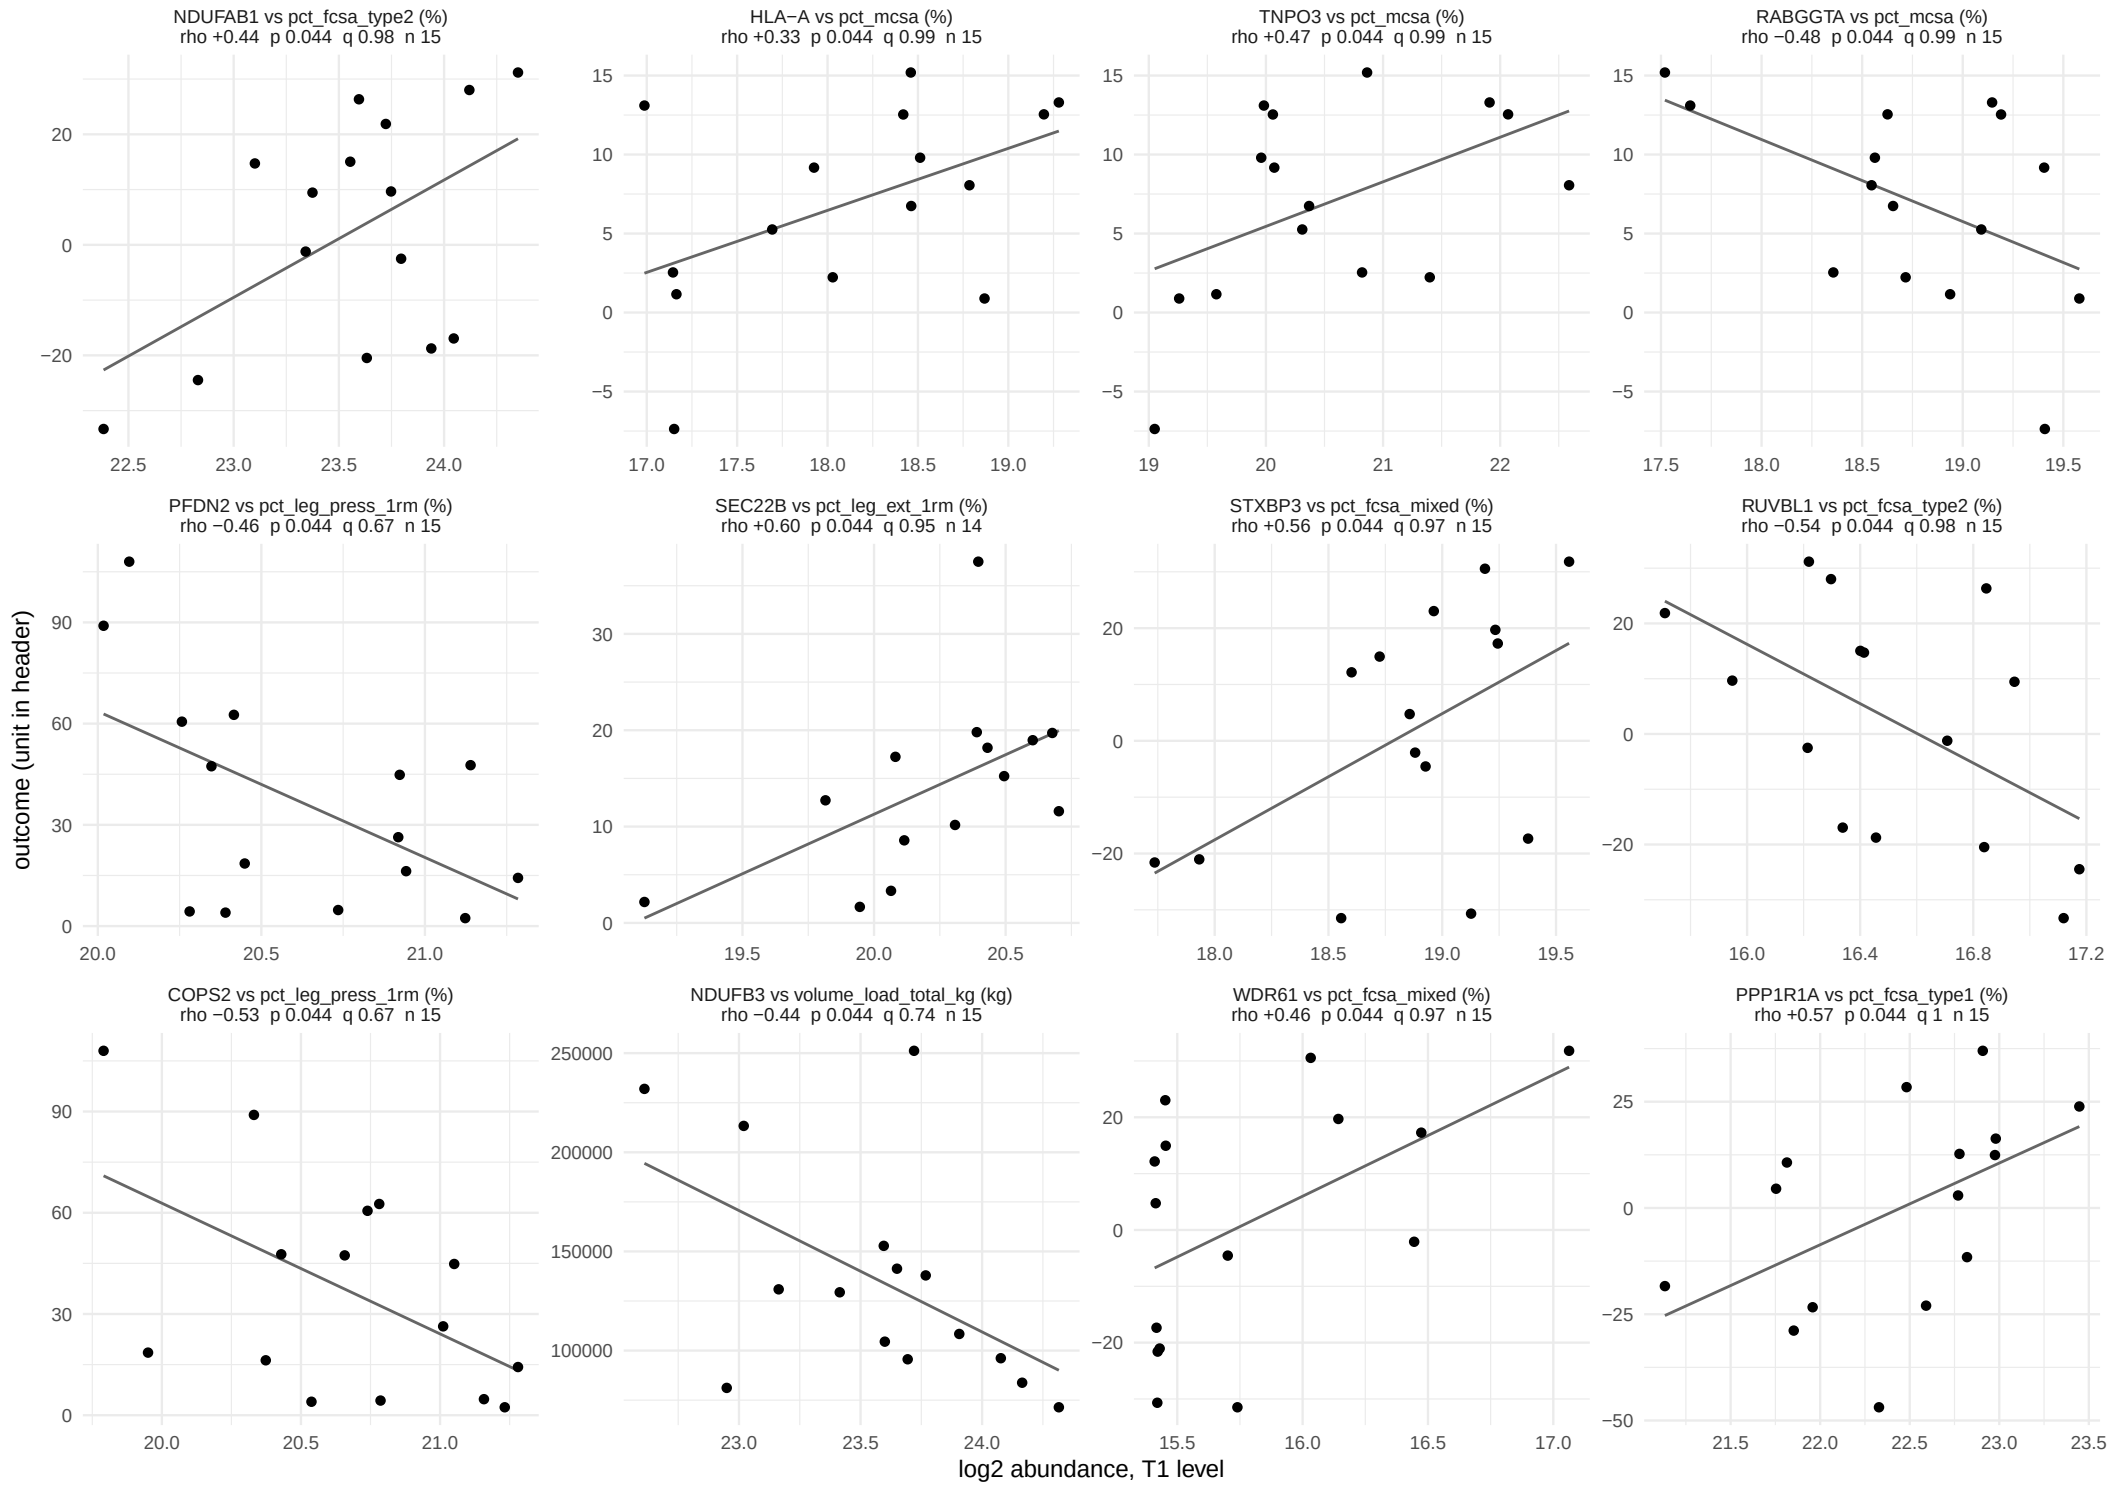

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline window


686 of 15200 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 51 of 58.

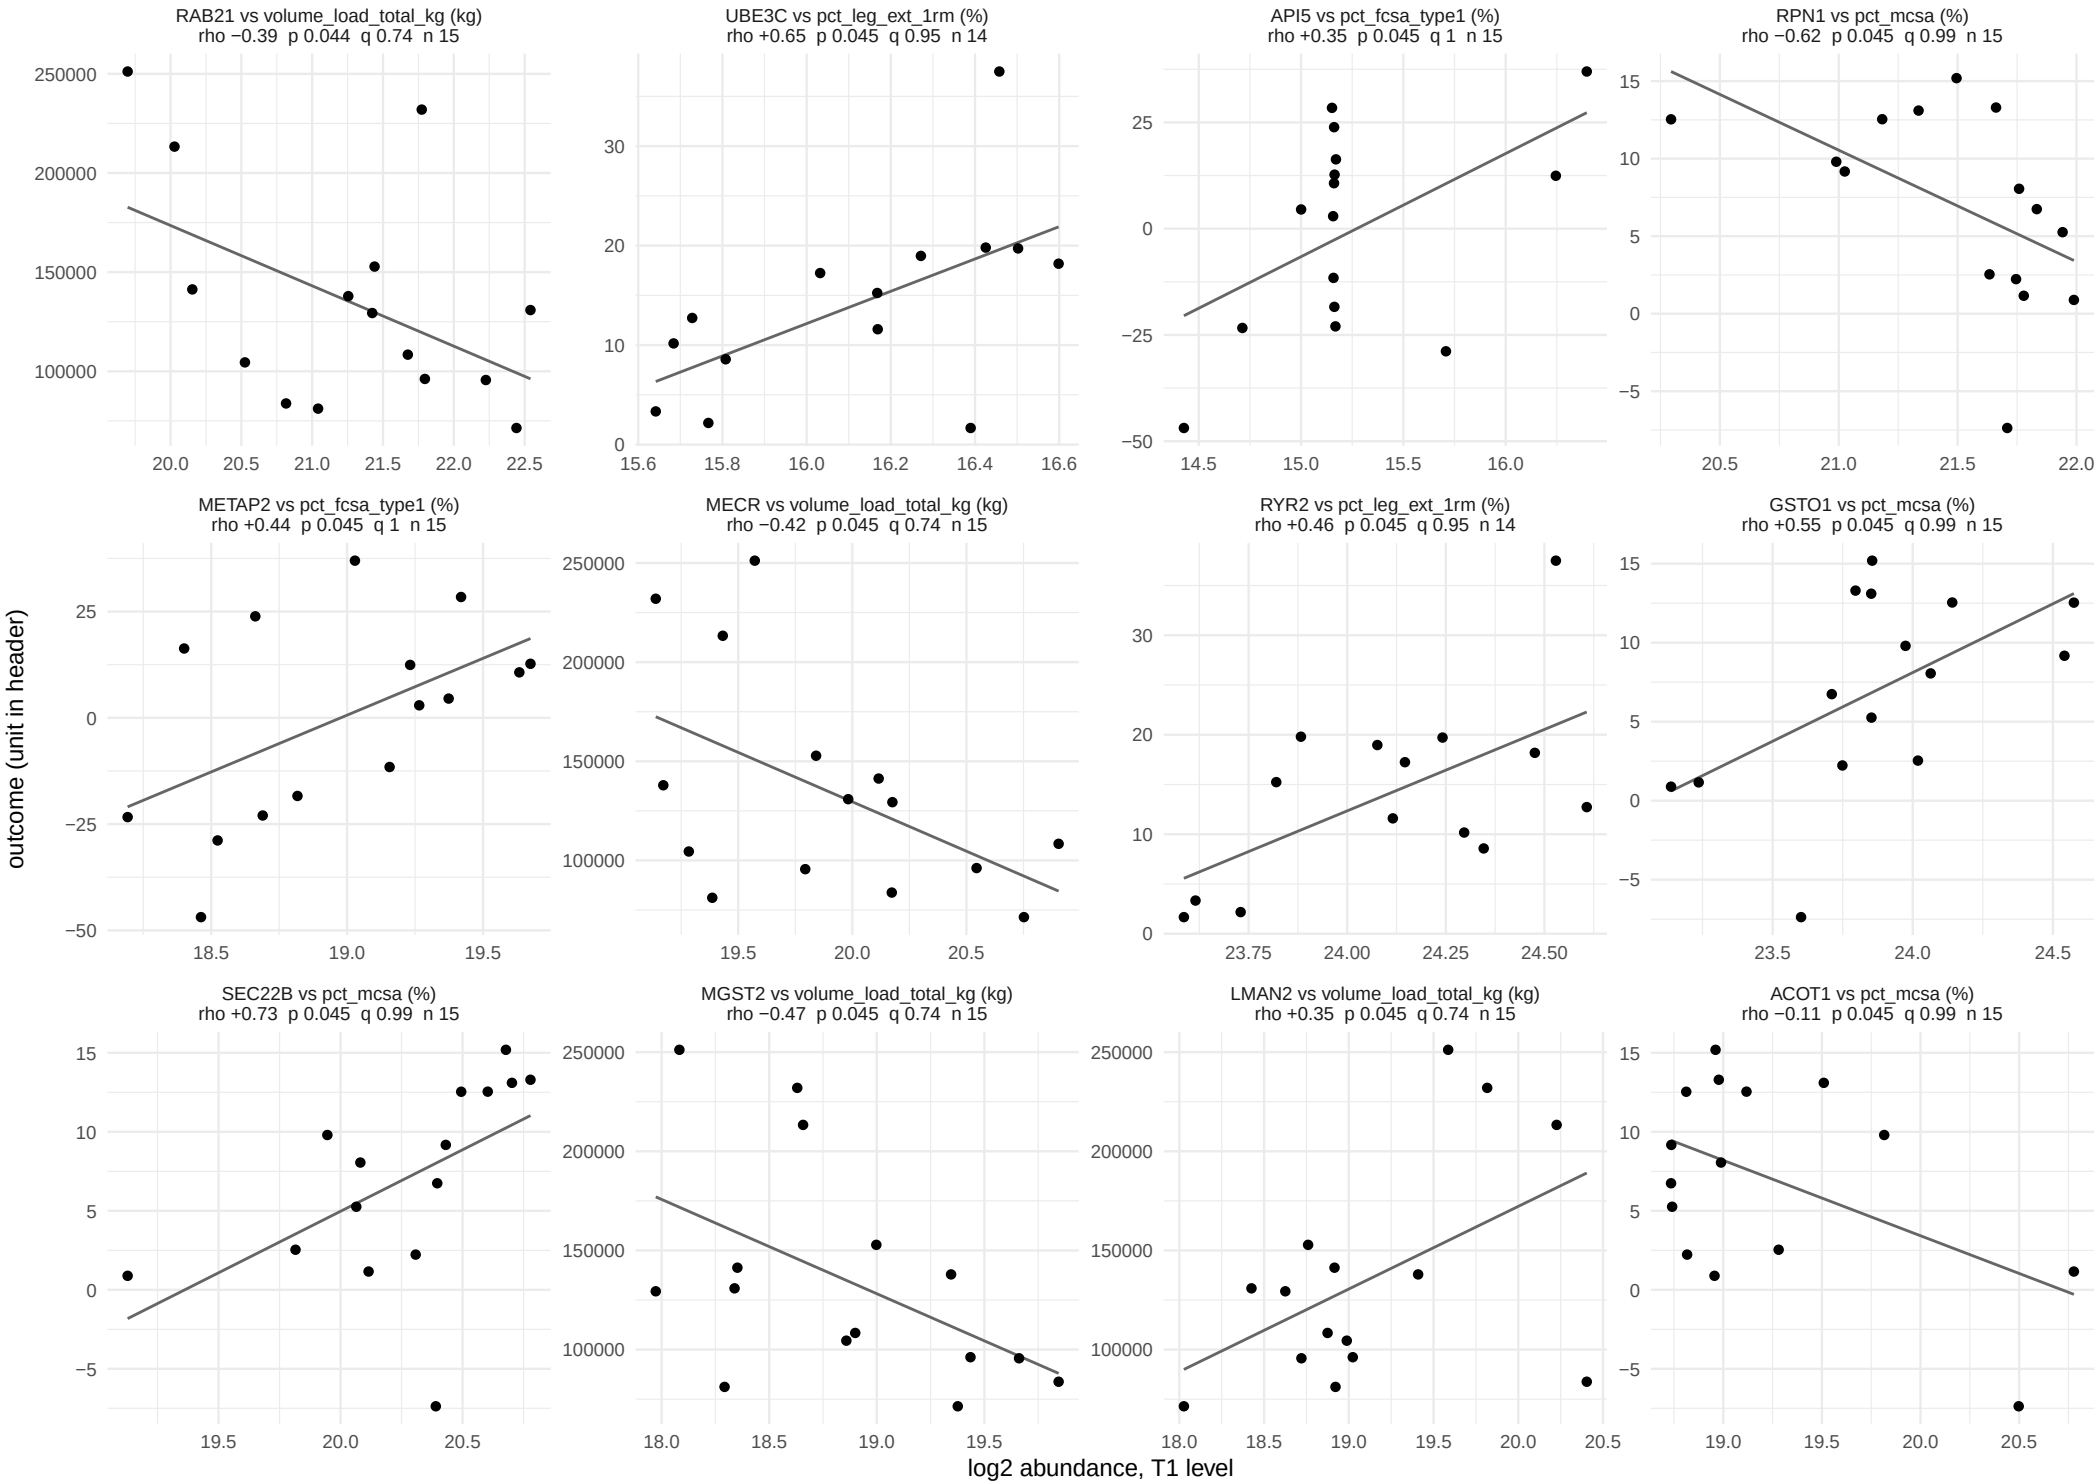

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline window


686 of 15200 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 52 of 58.

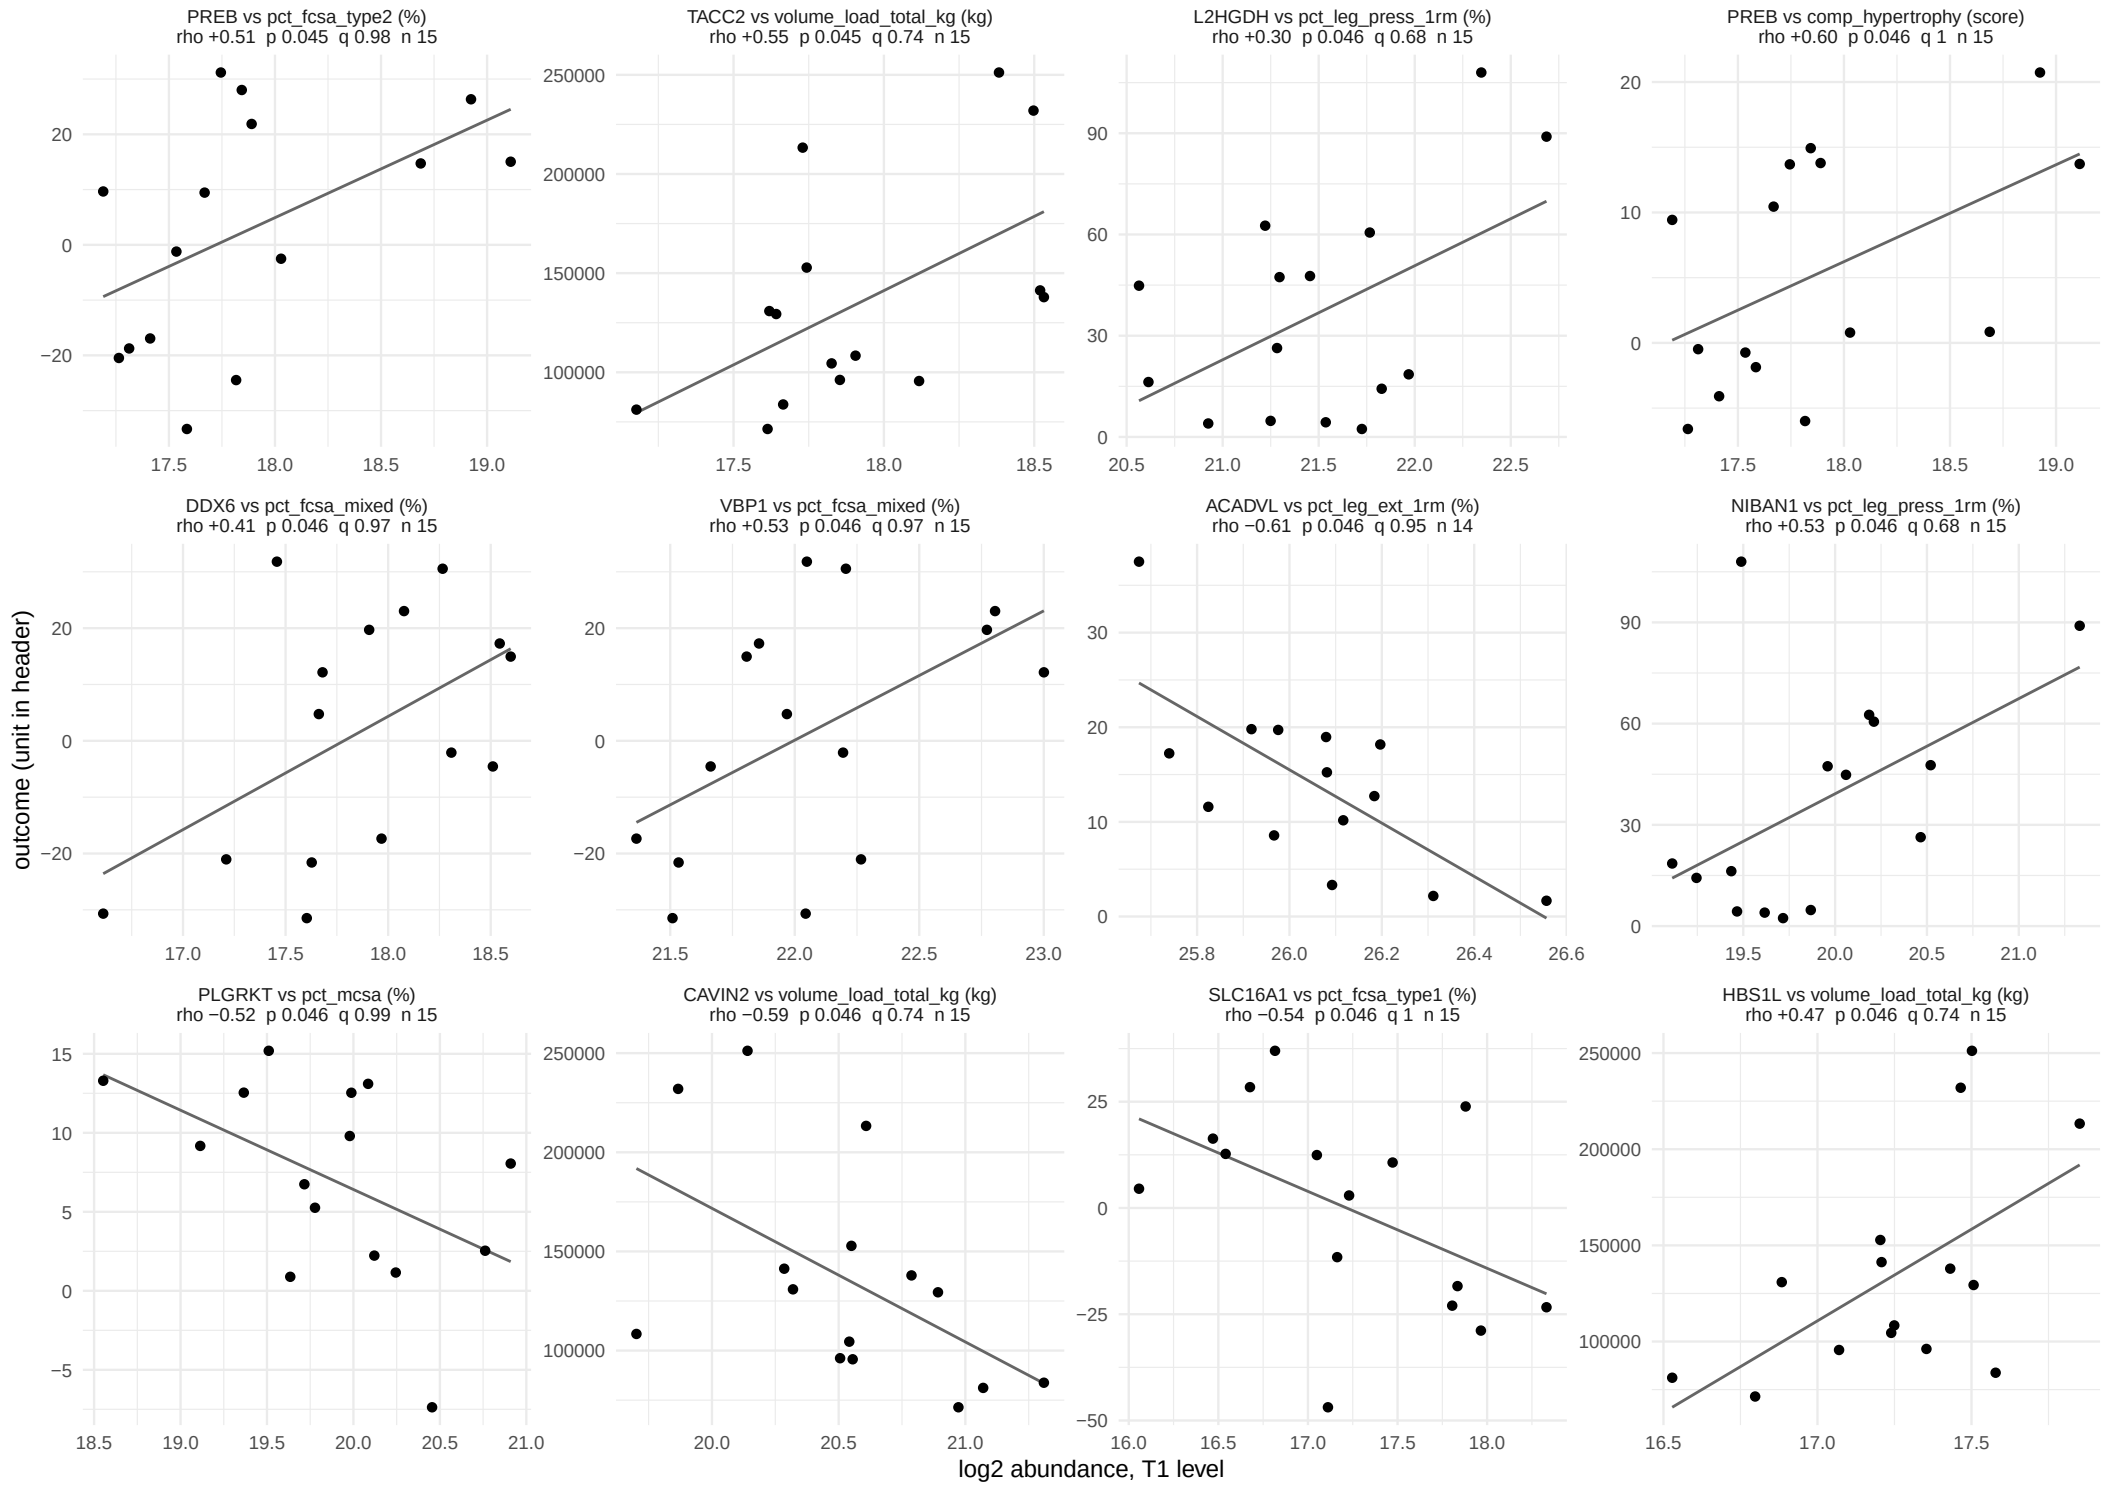

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline window


686 of 15200 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 53 of 58.

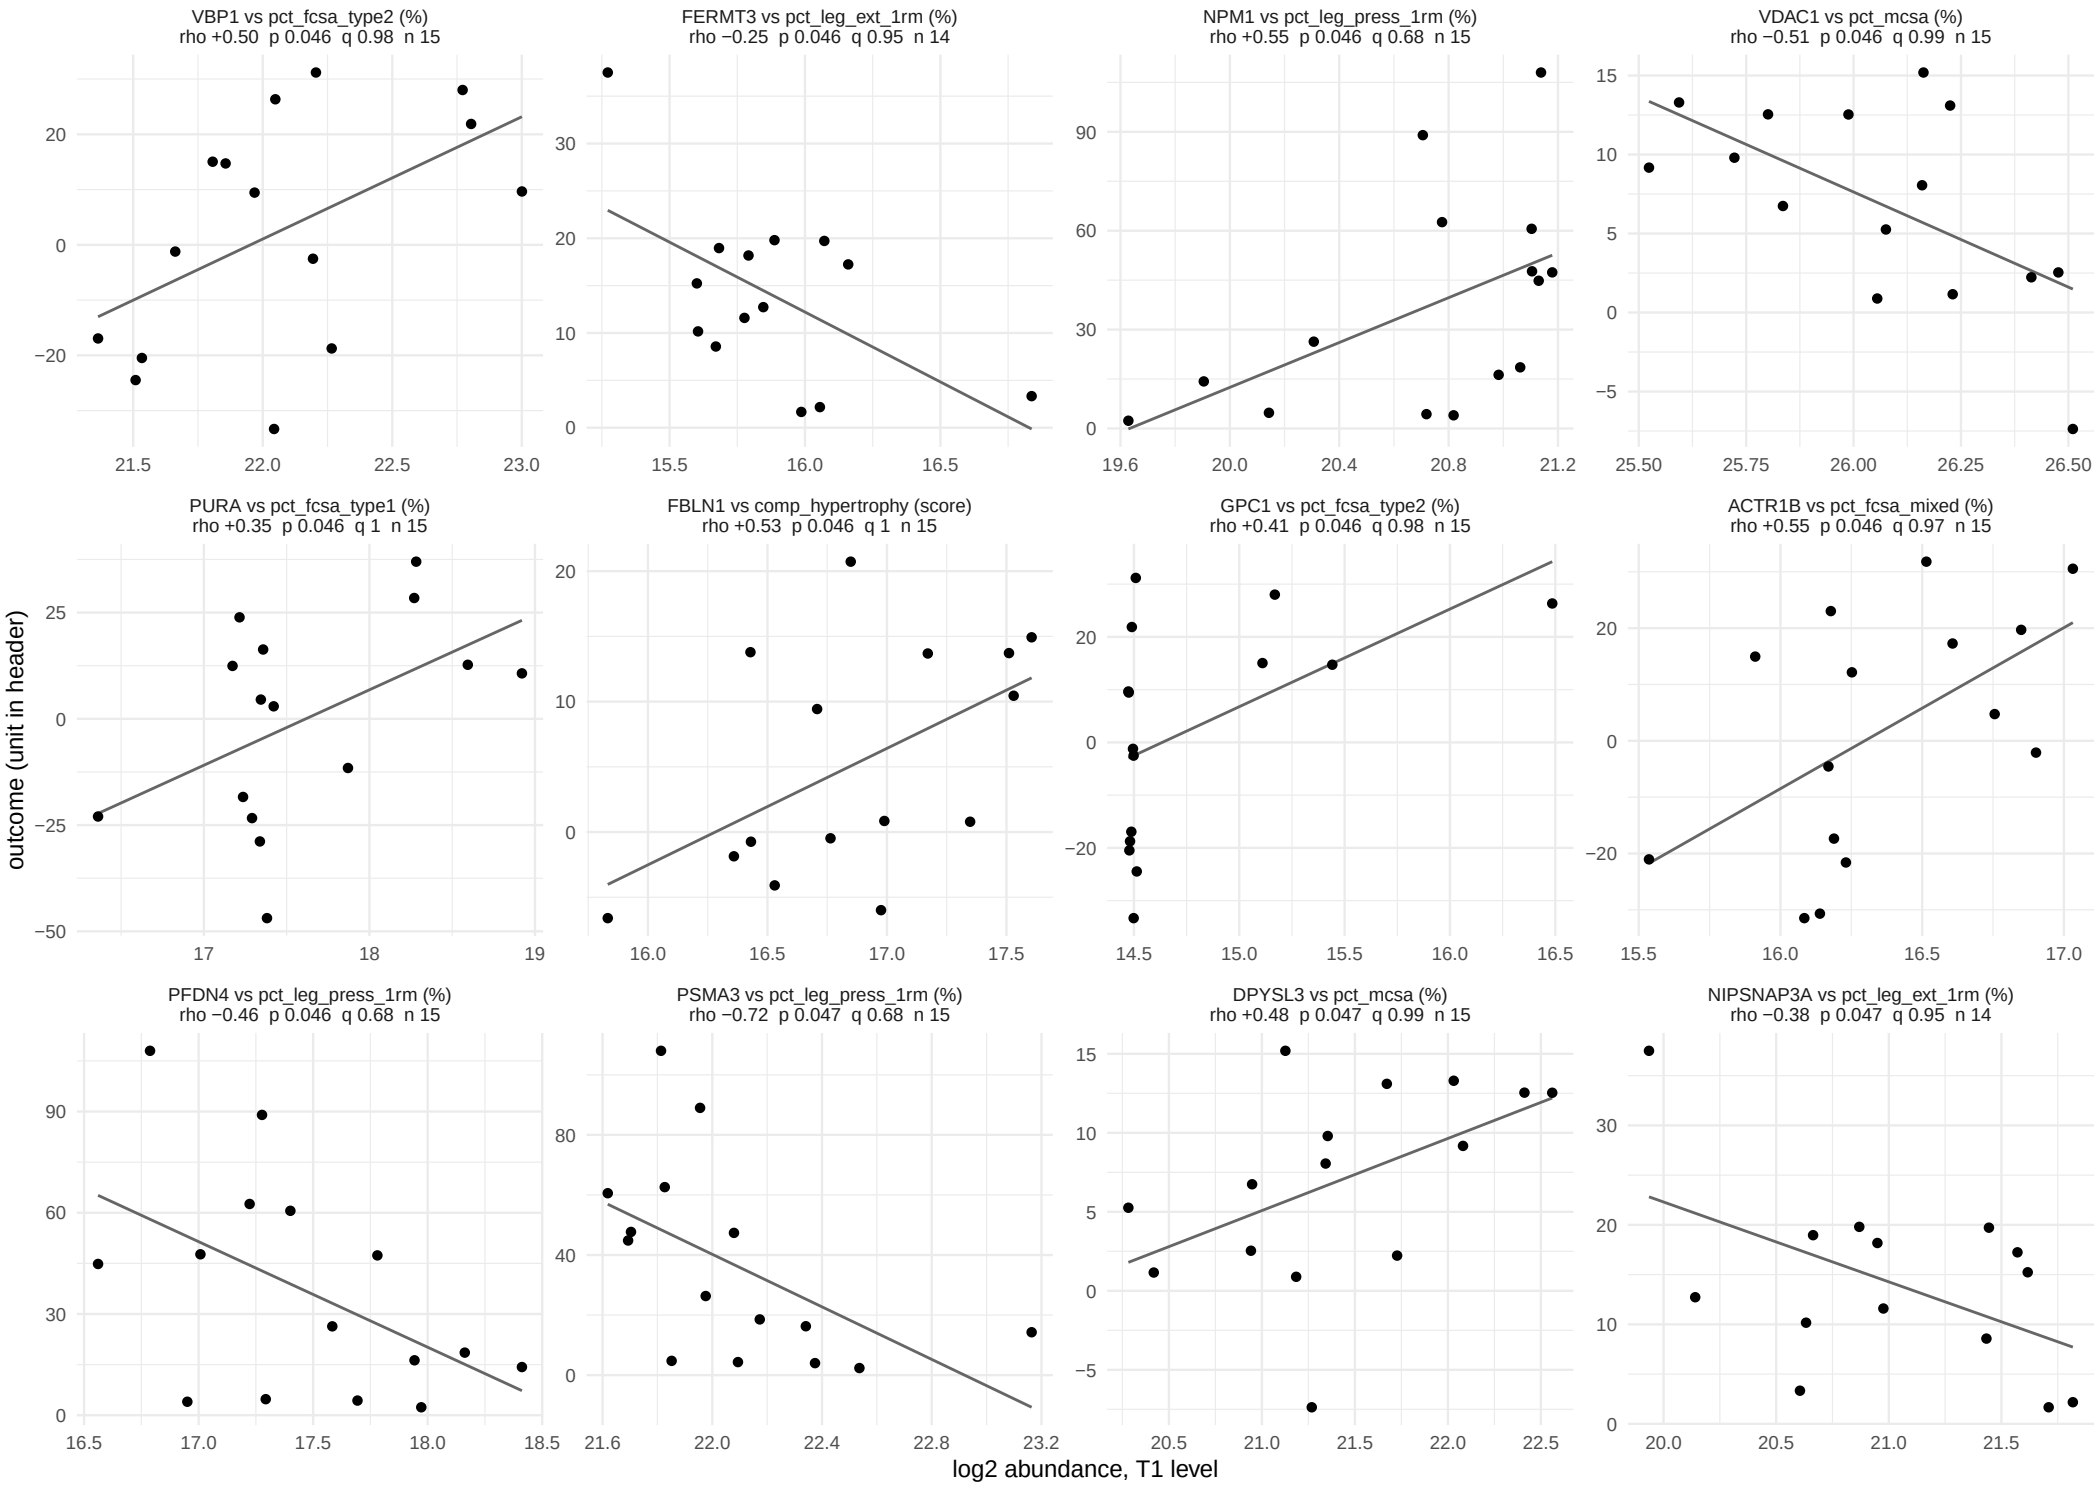

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline window


686 of 15200 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 54 of 58.

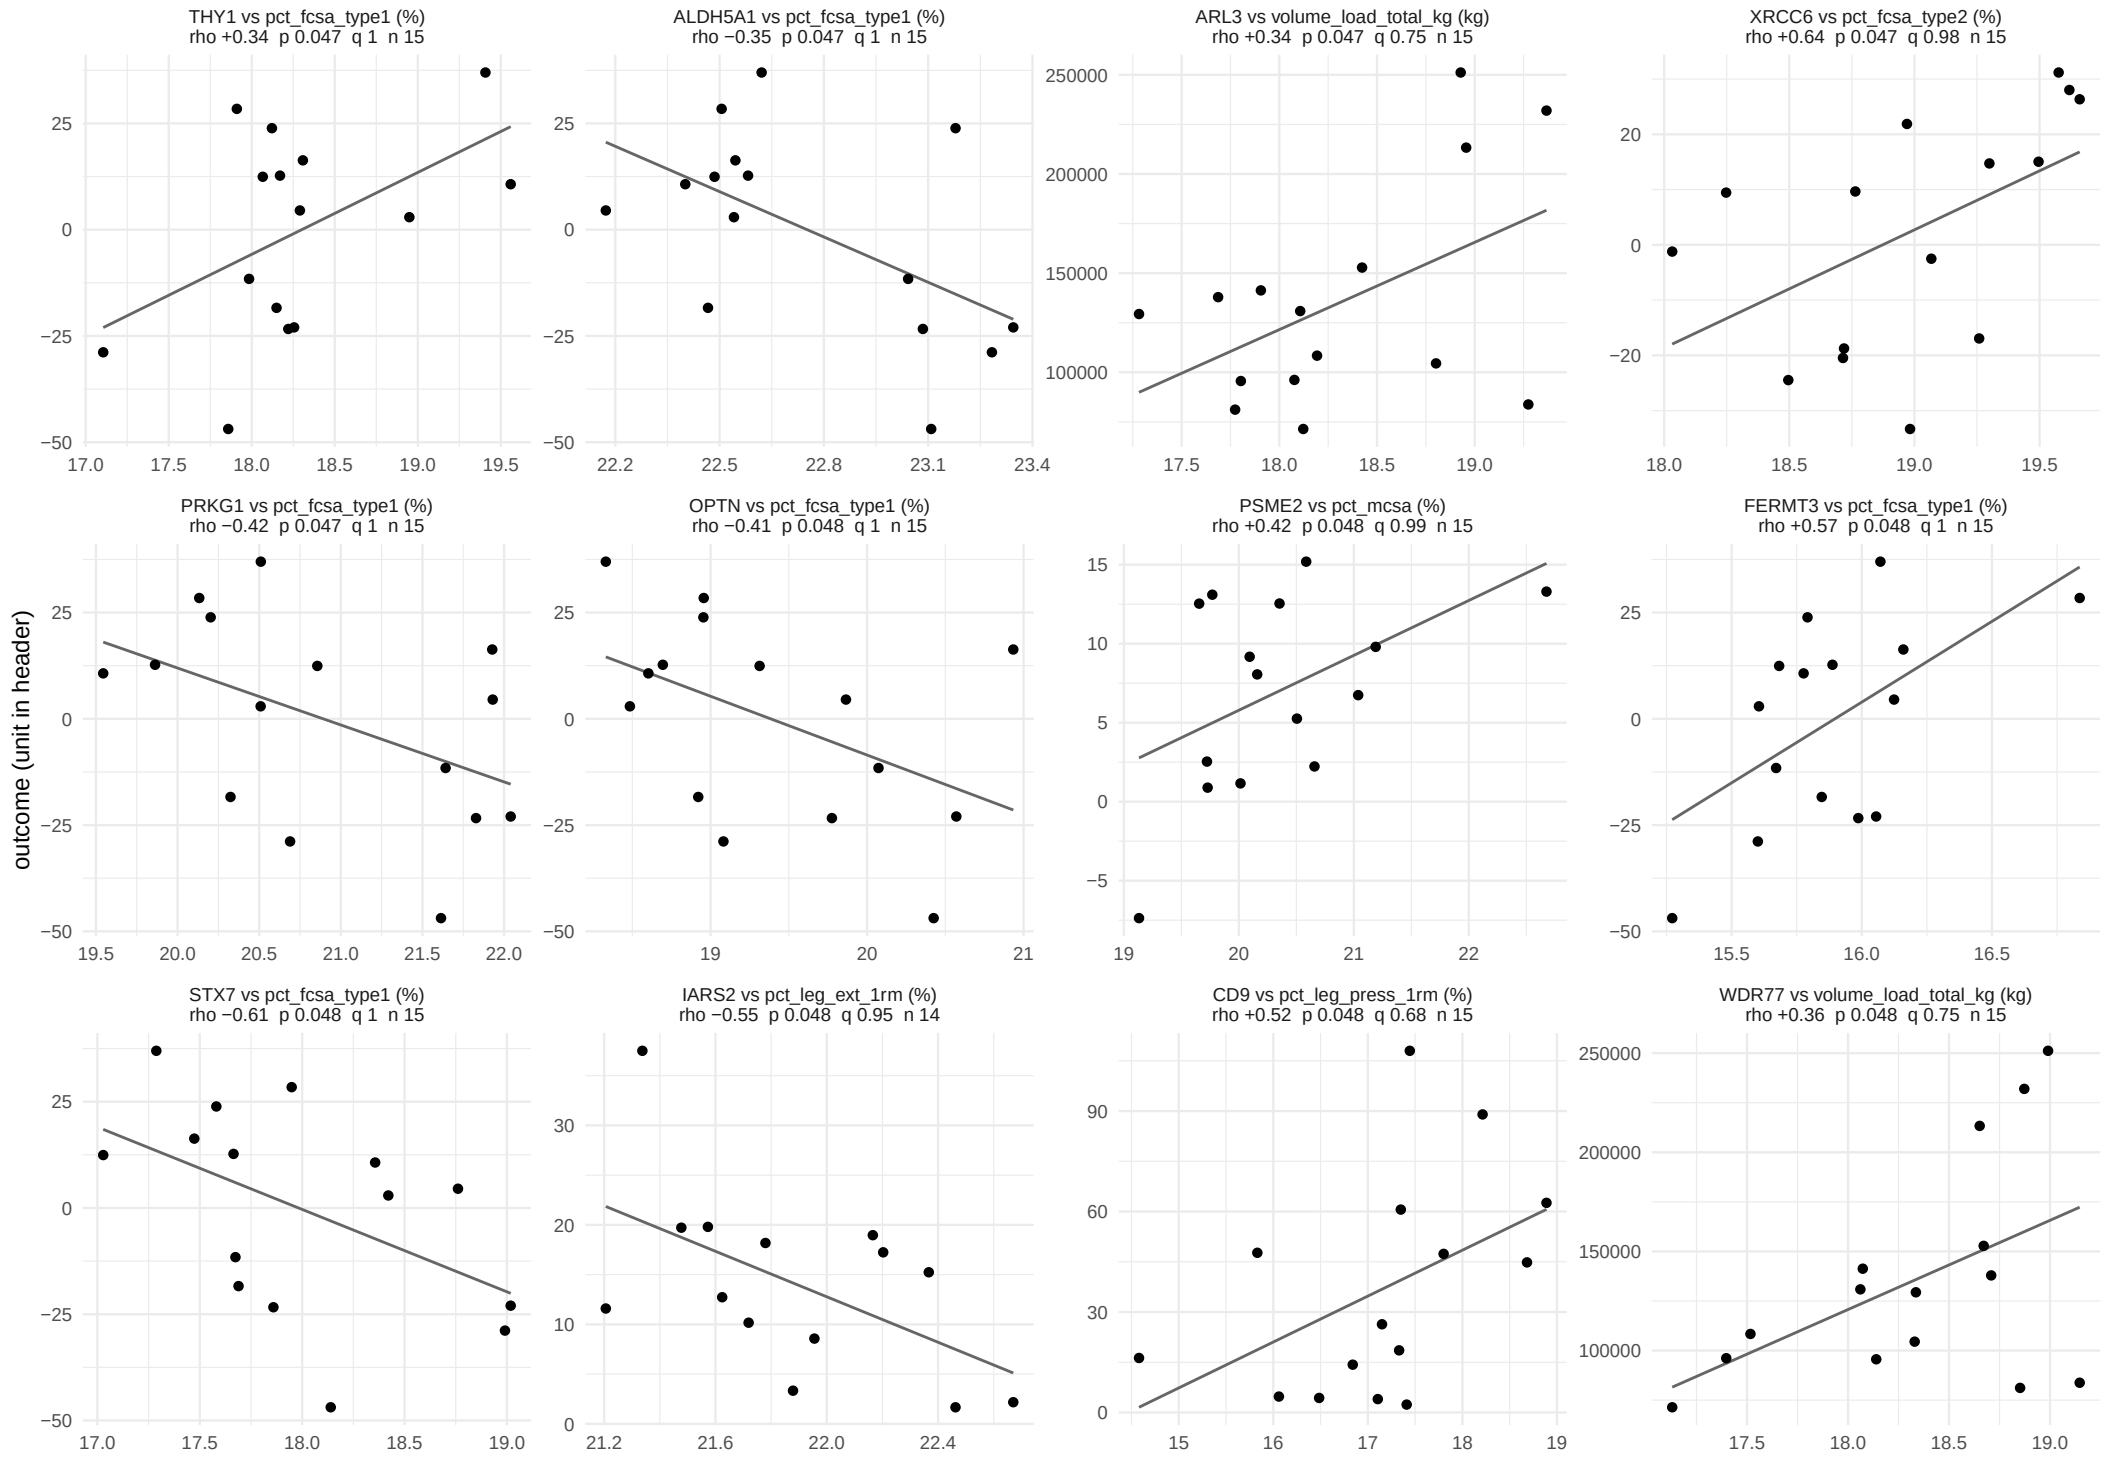

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline window


686 of 15200 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 55 of 58.

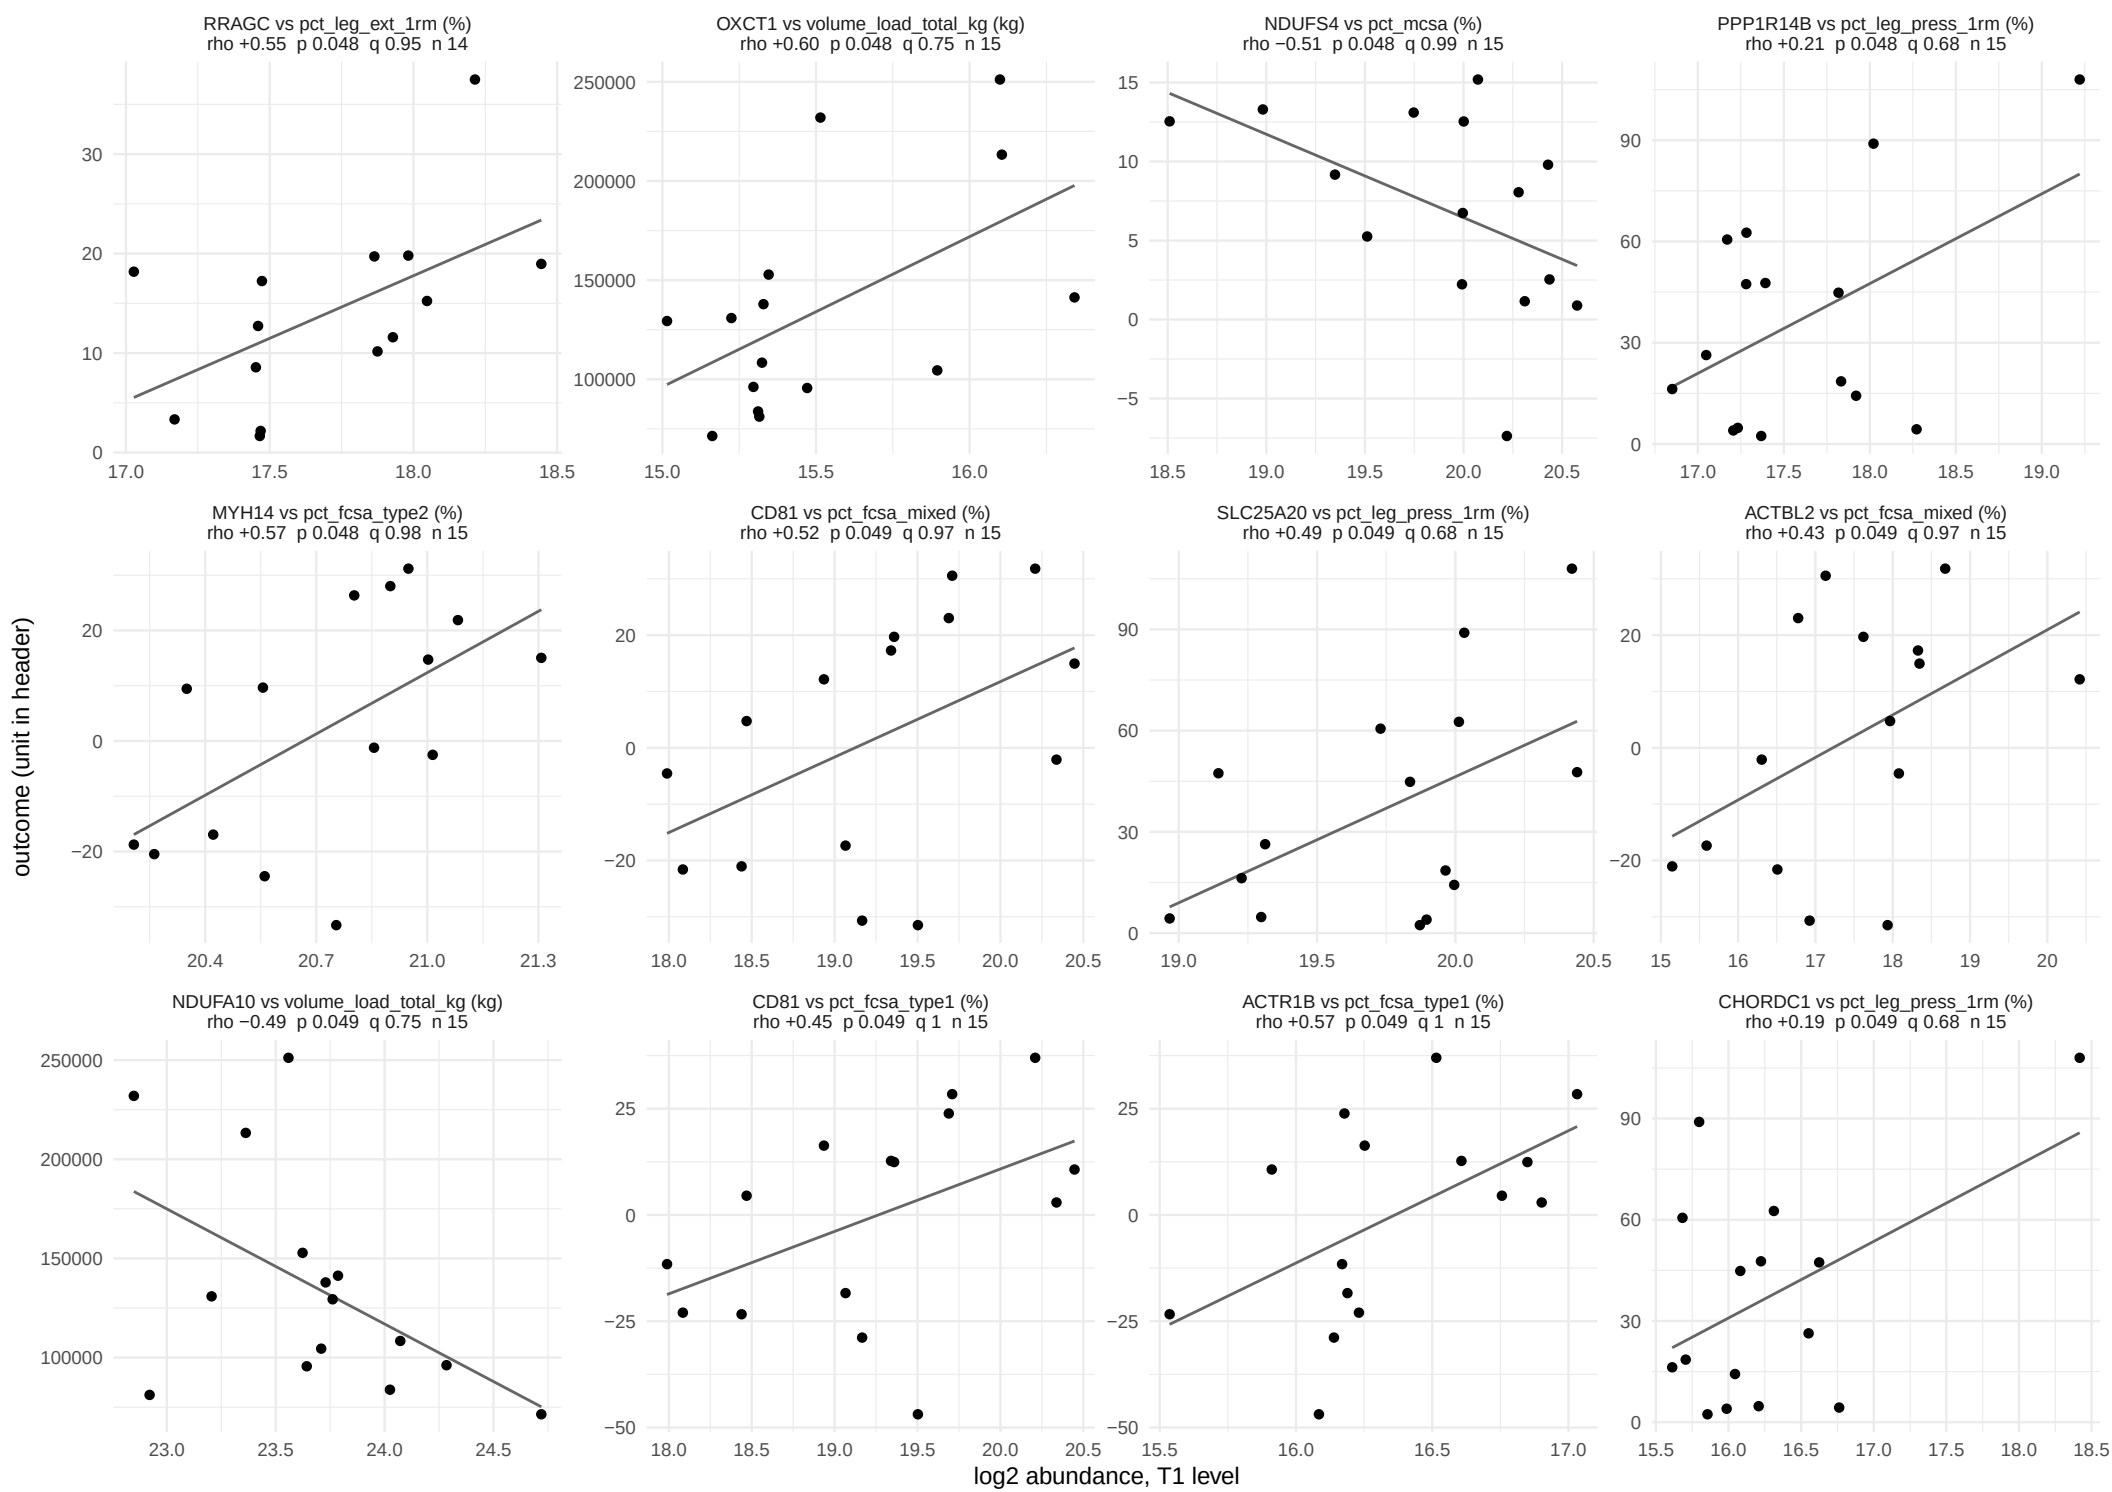

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline window


686 of 15200 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 56 of 58.

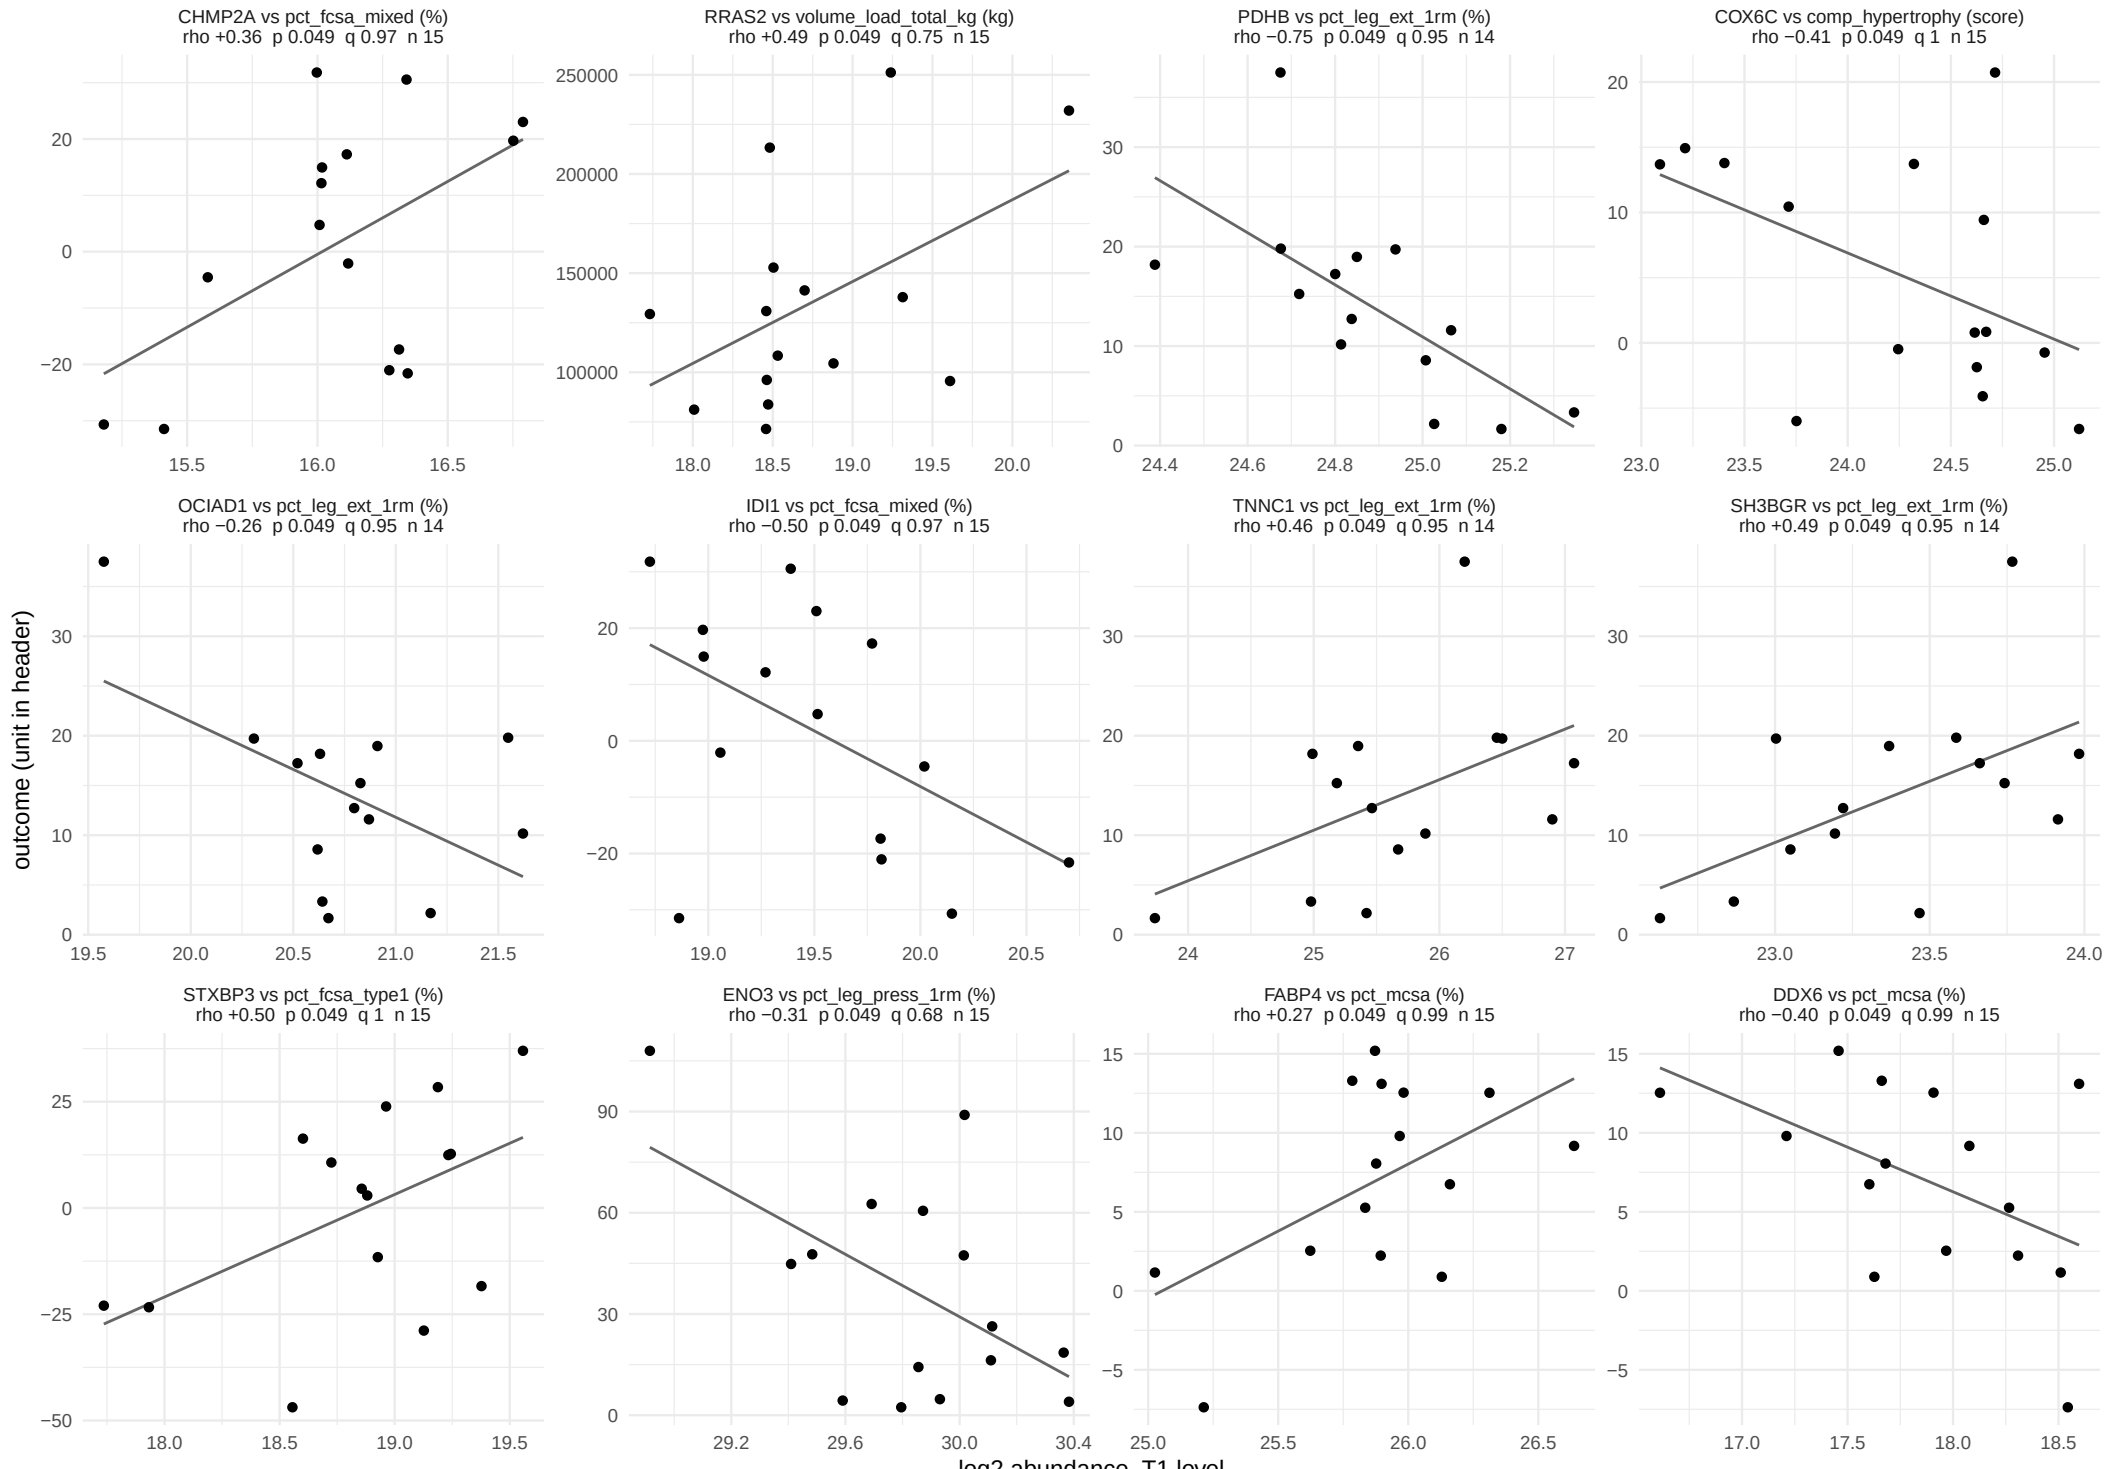

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline window


686 of 15200 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 57 of 58.

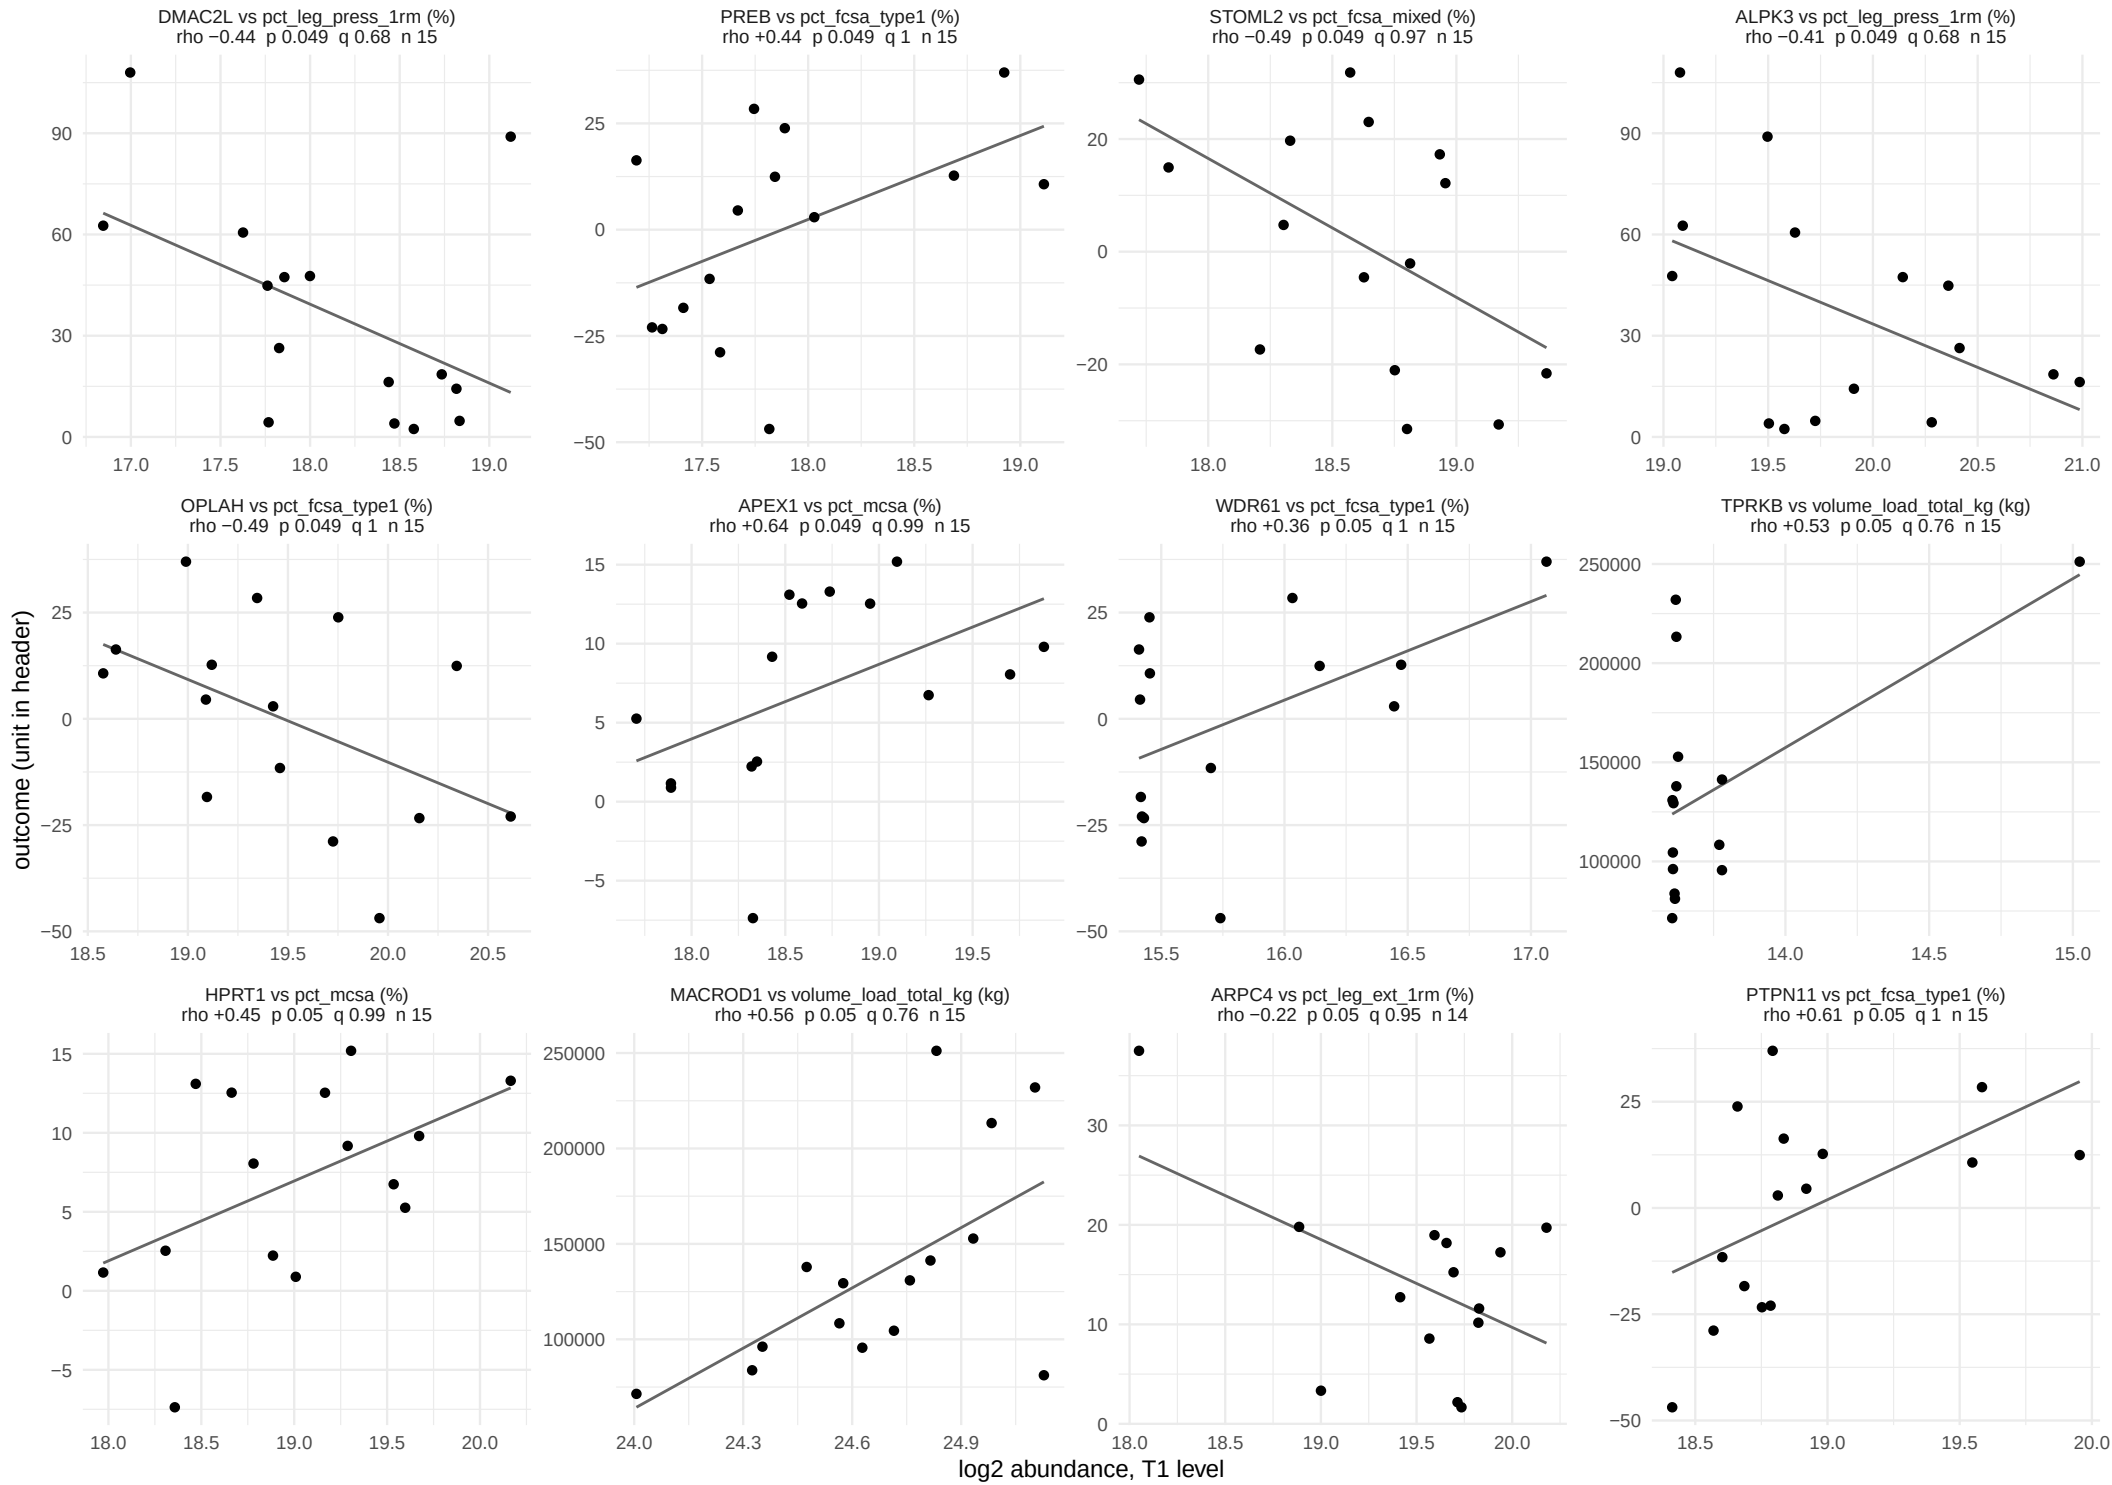

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline window

686 of 15200 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 58 of 58.

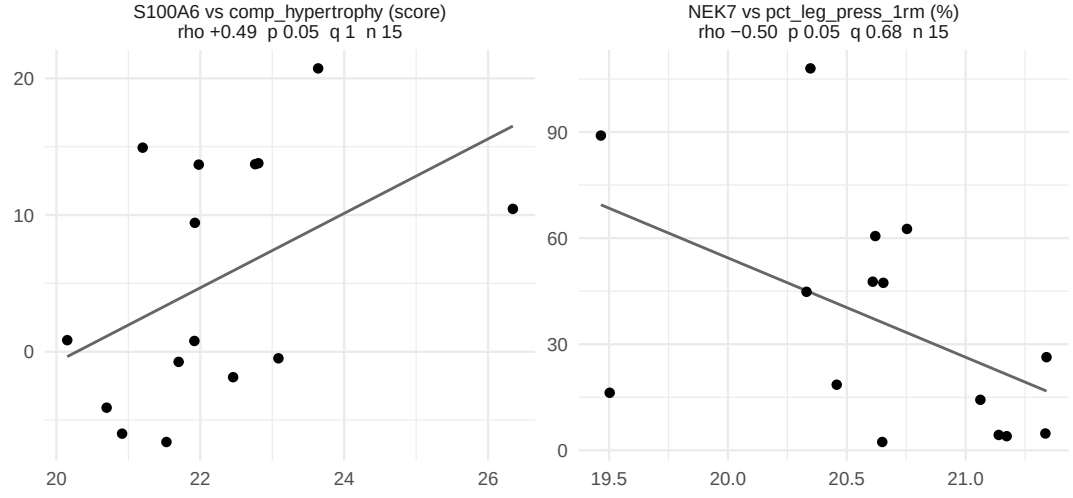


outcome (unit in header)

log2 abundance, T1 level

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, acute window


629 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 1 of 53.

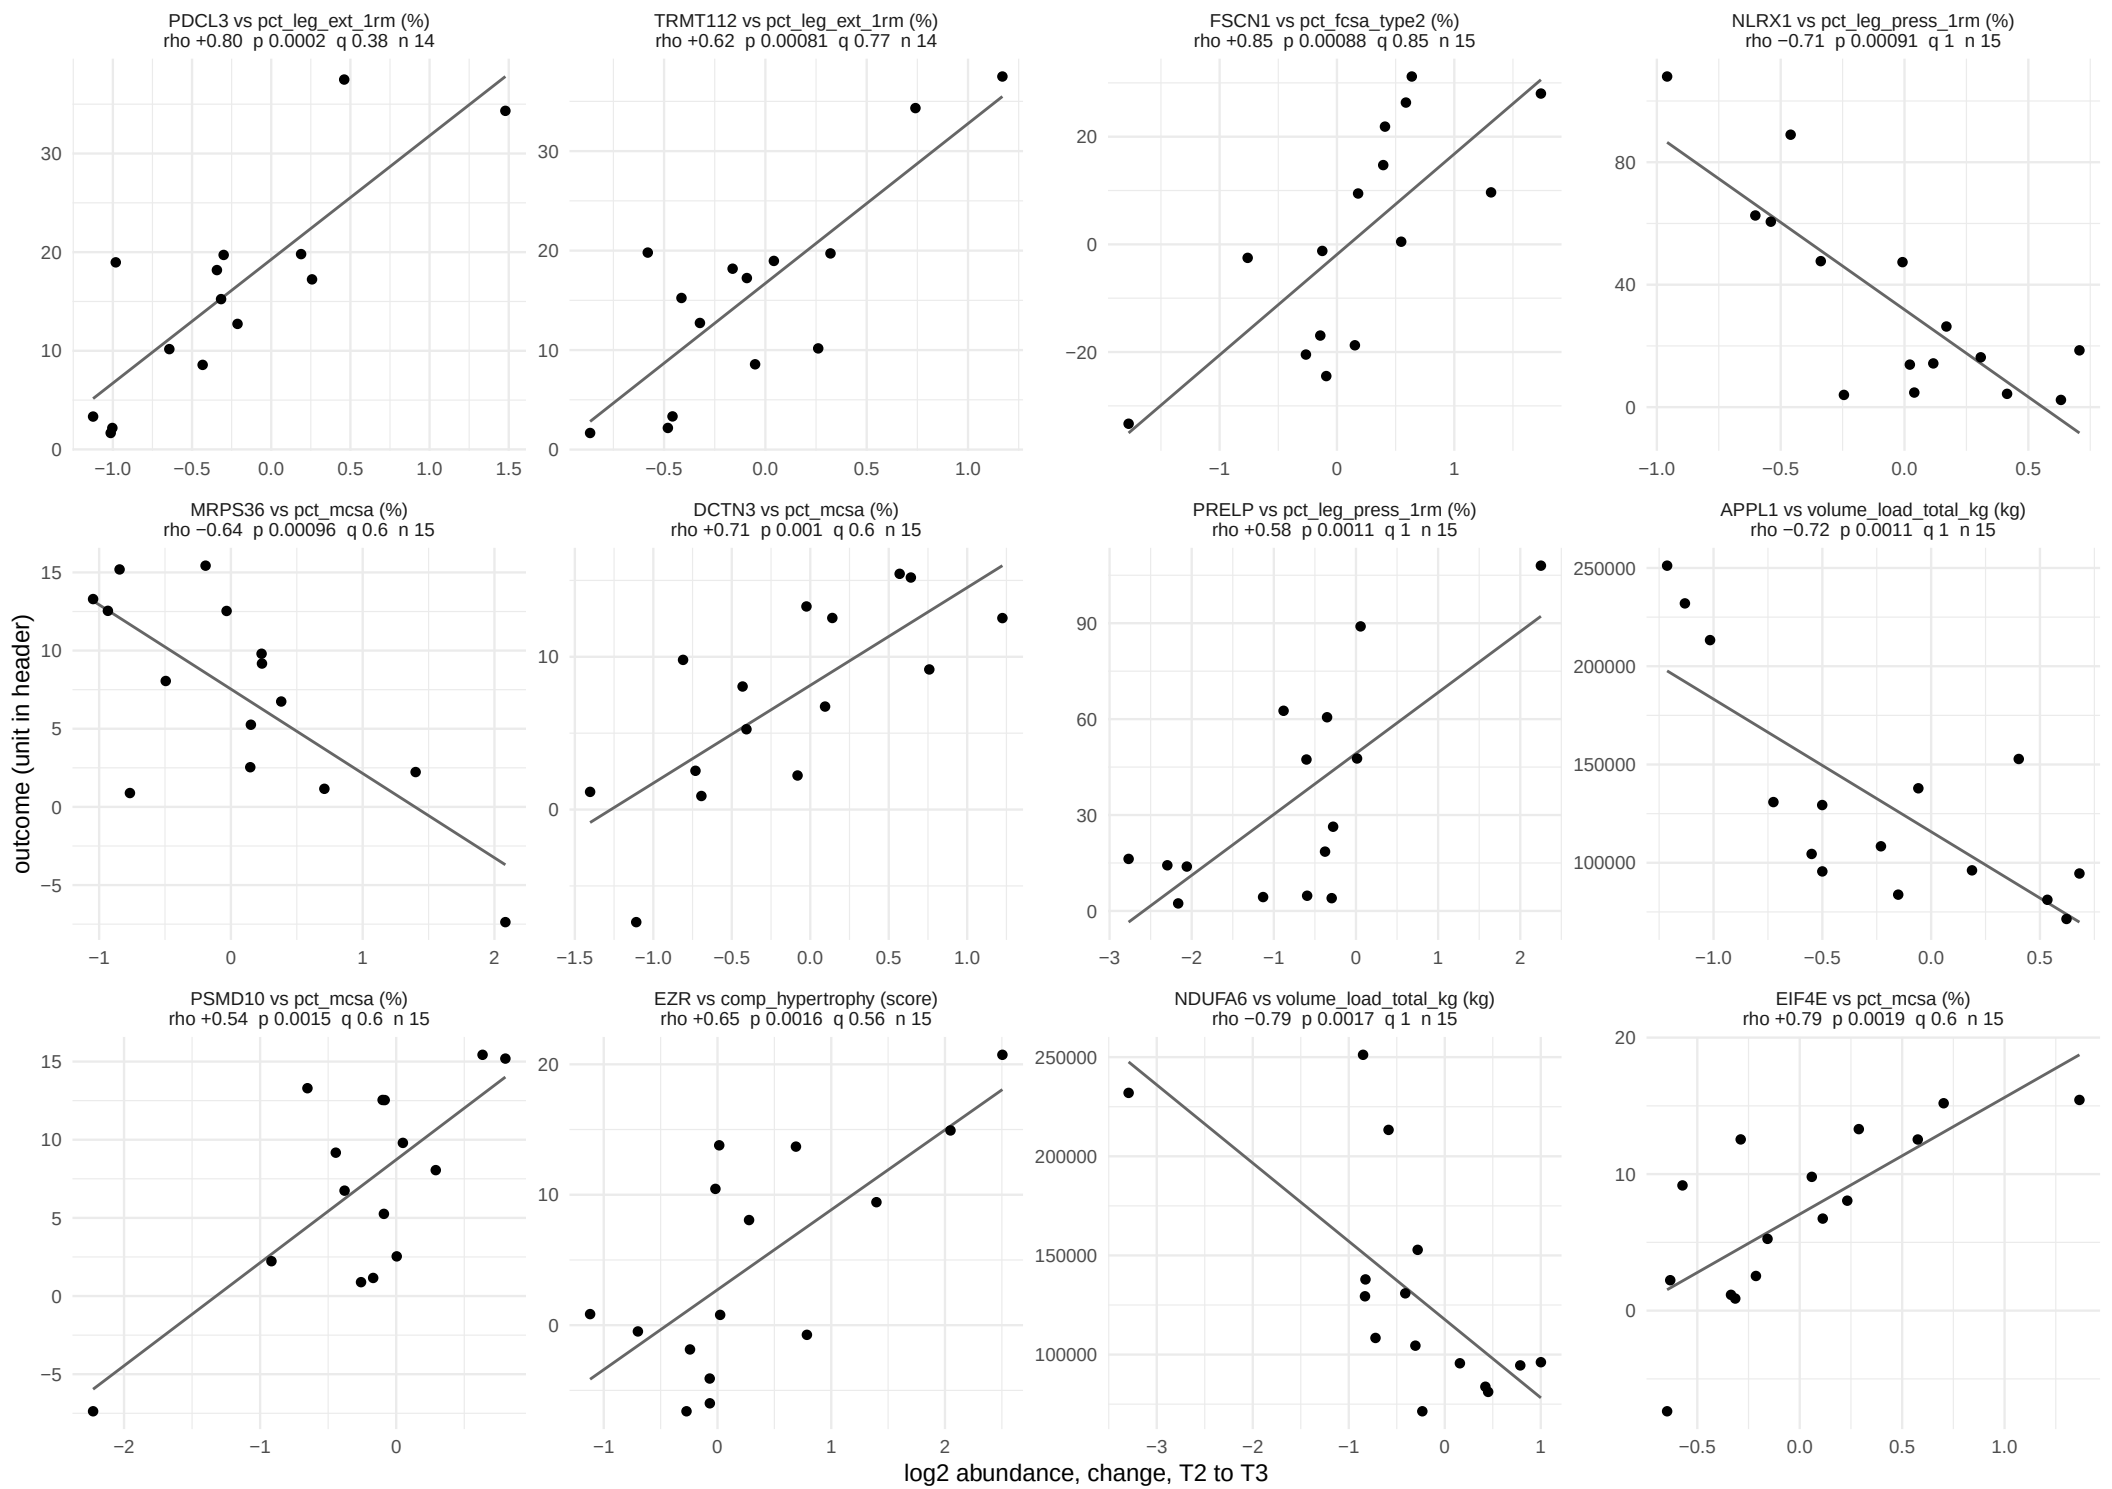

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, acute window


629 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 2 of 53.

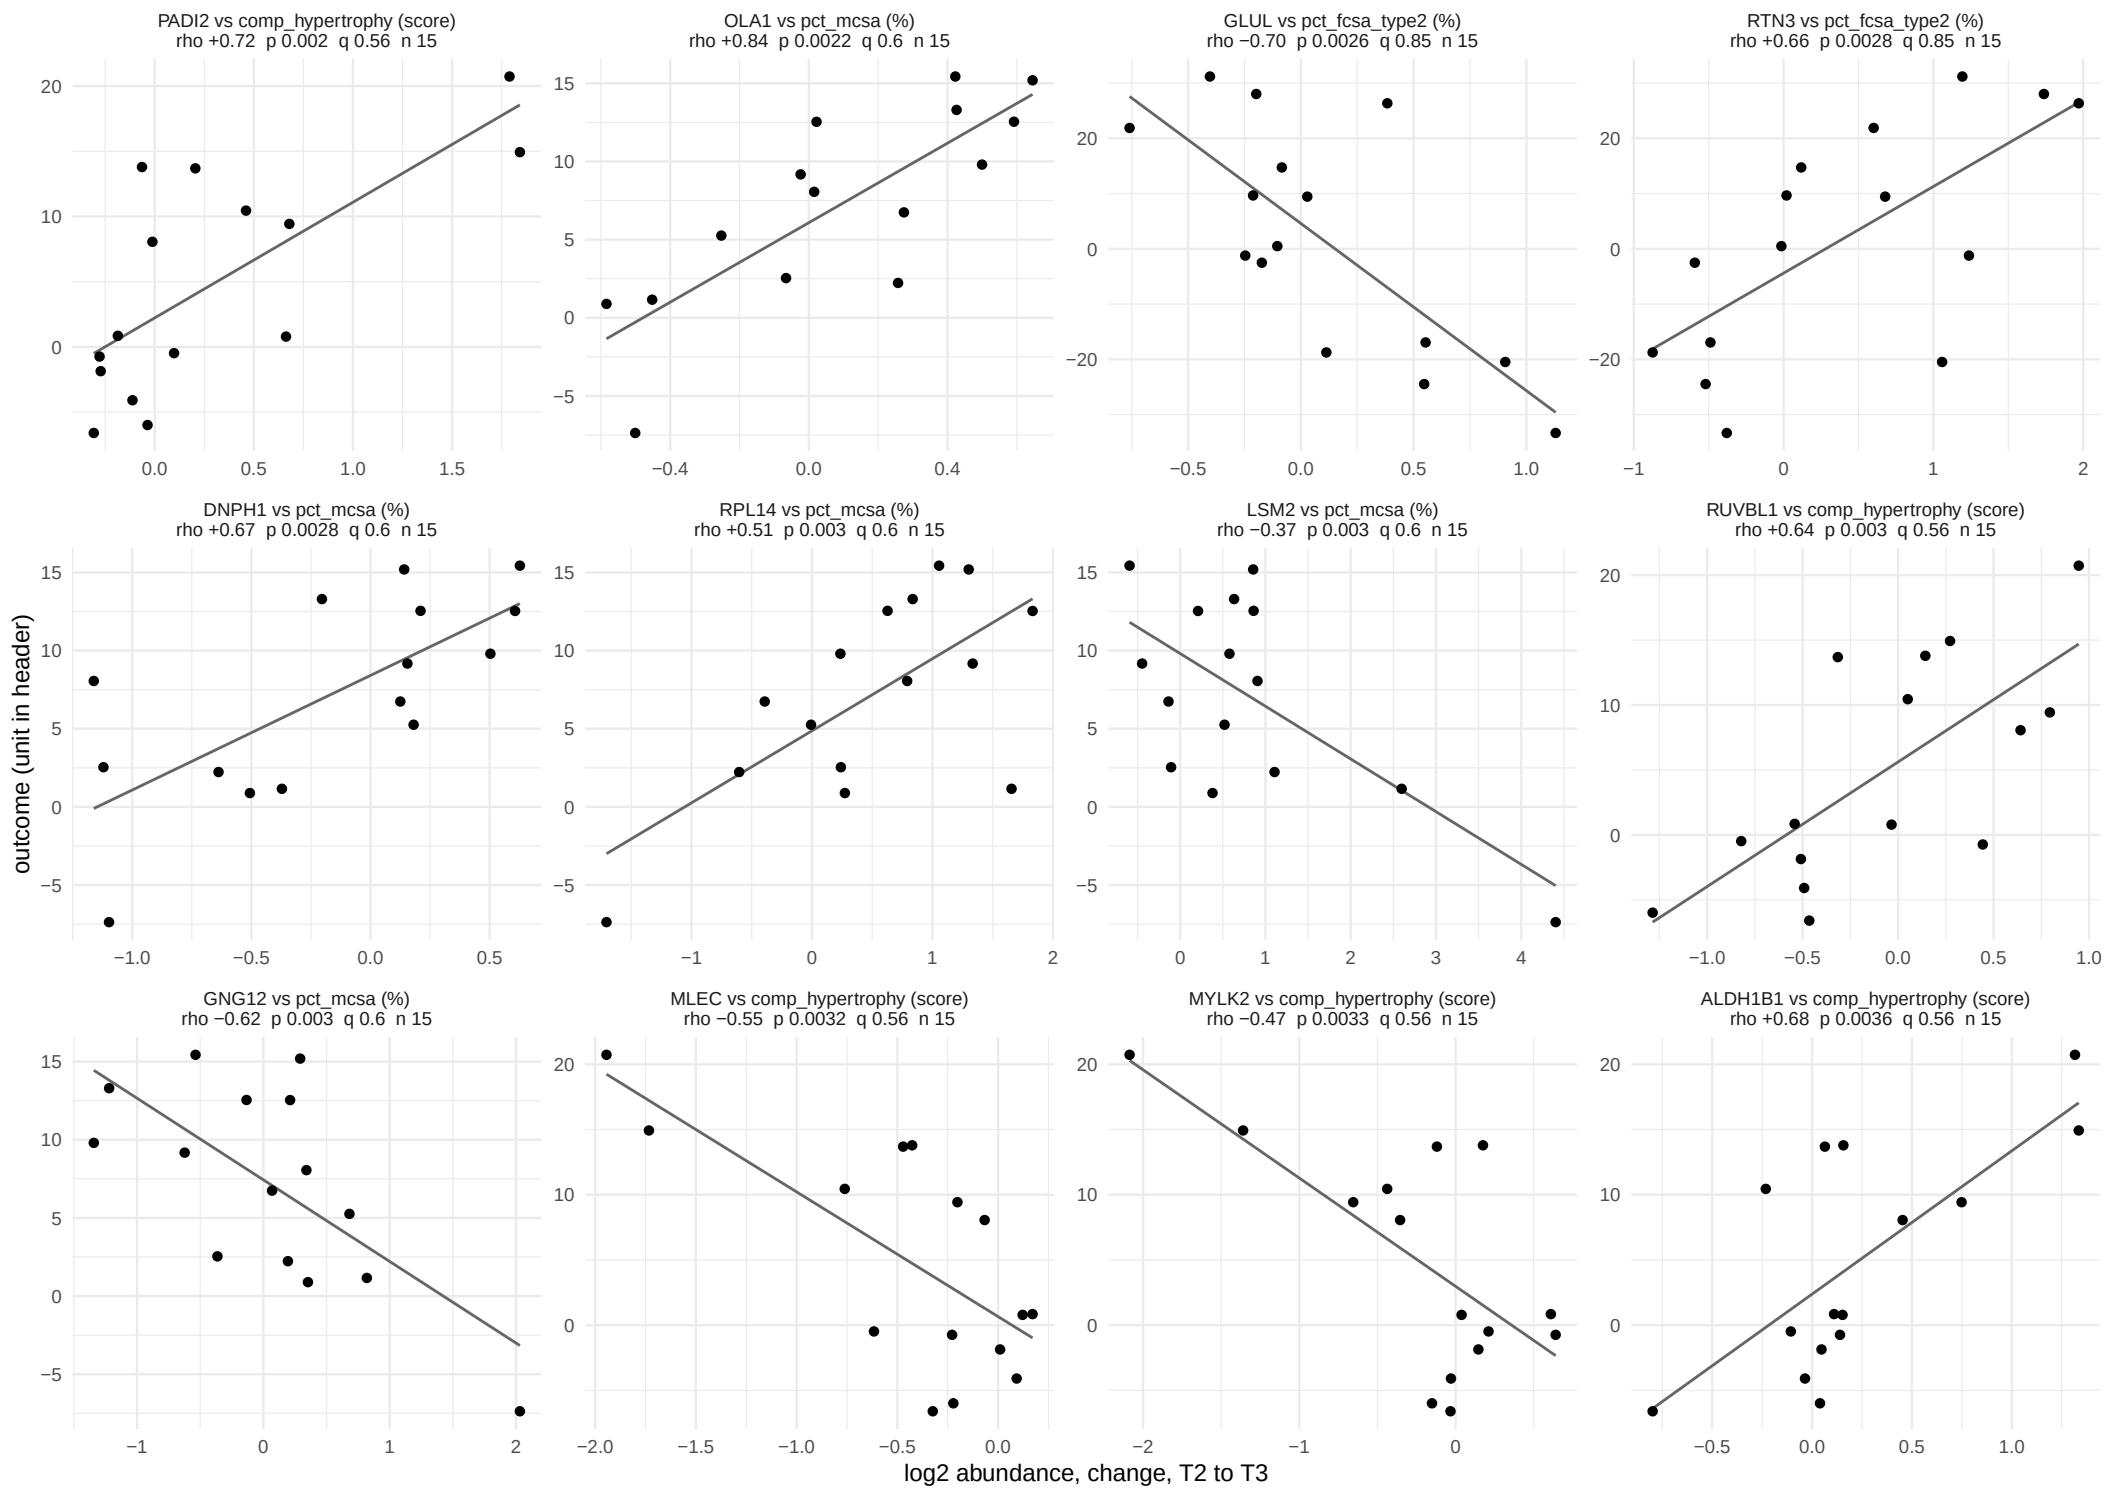

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, acute window


629 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 3 of 53.

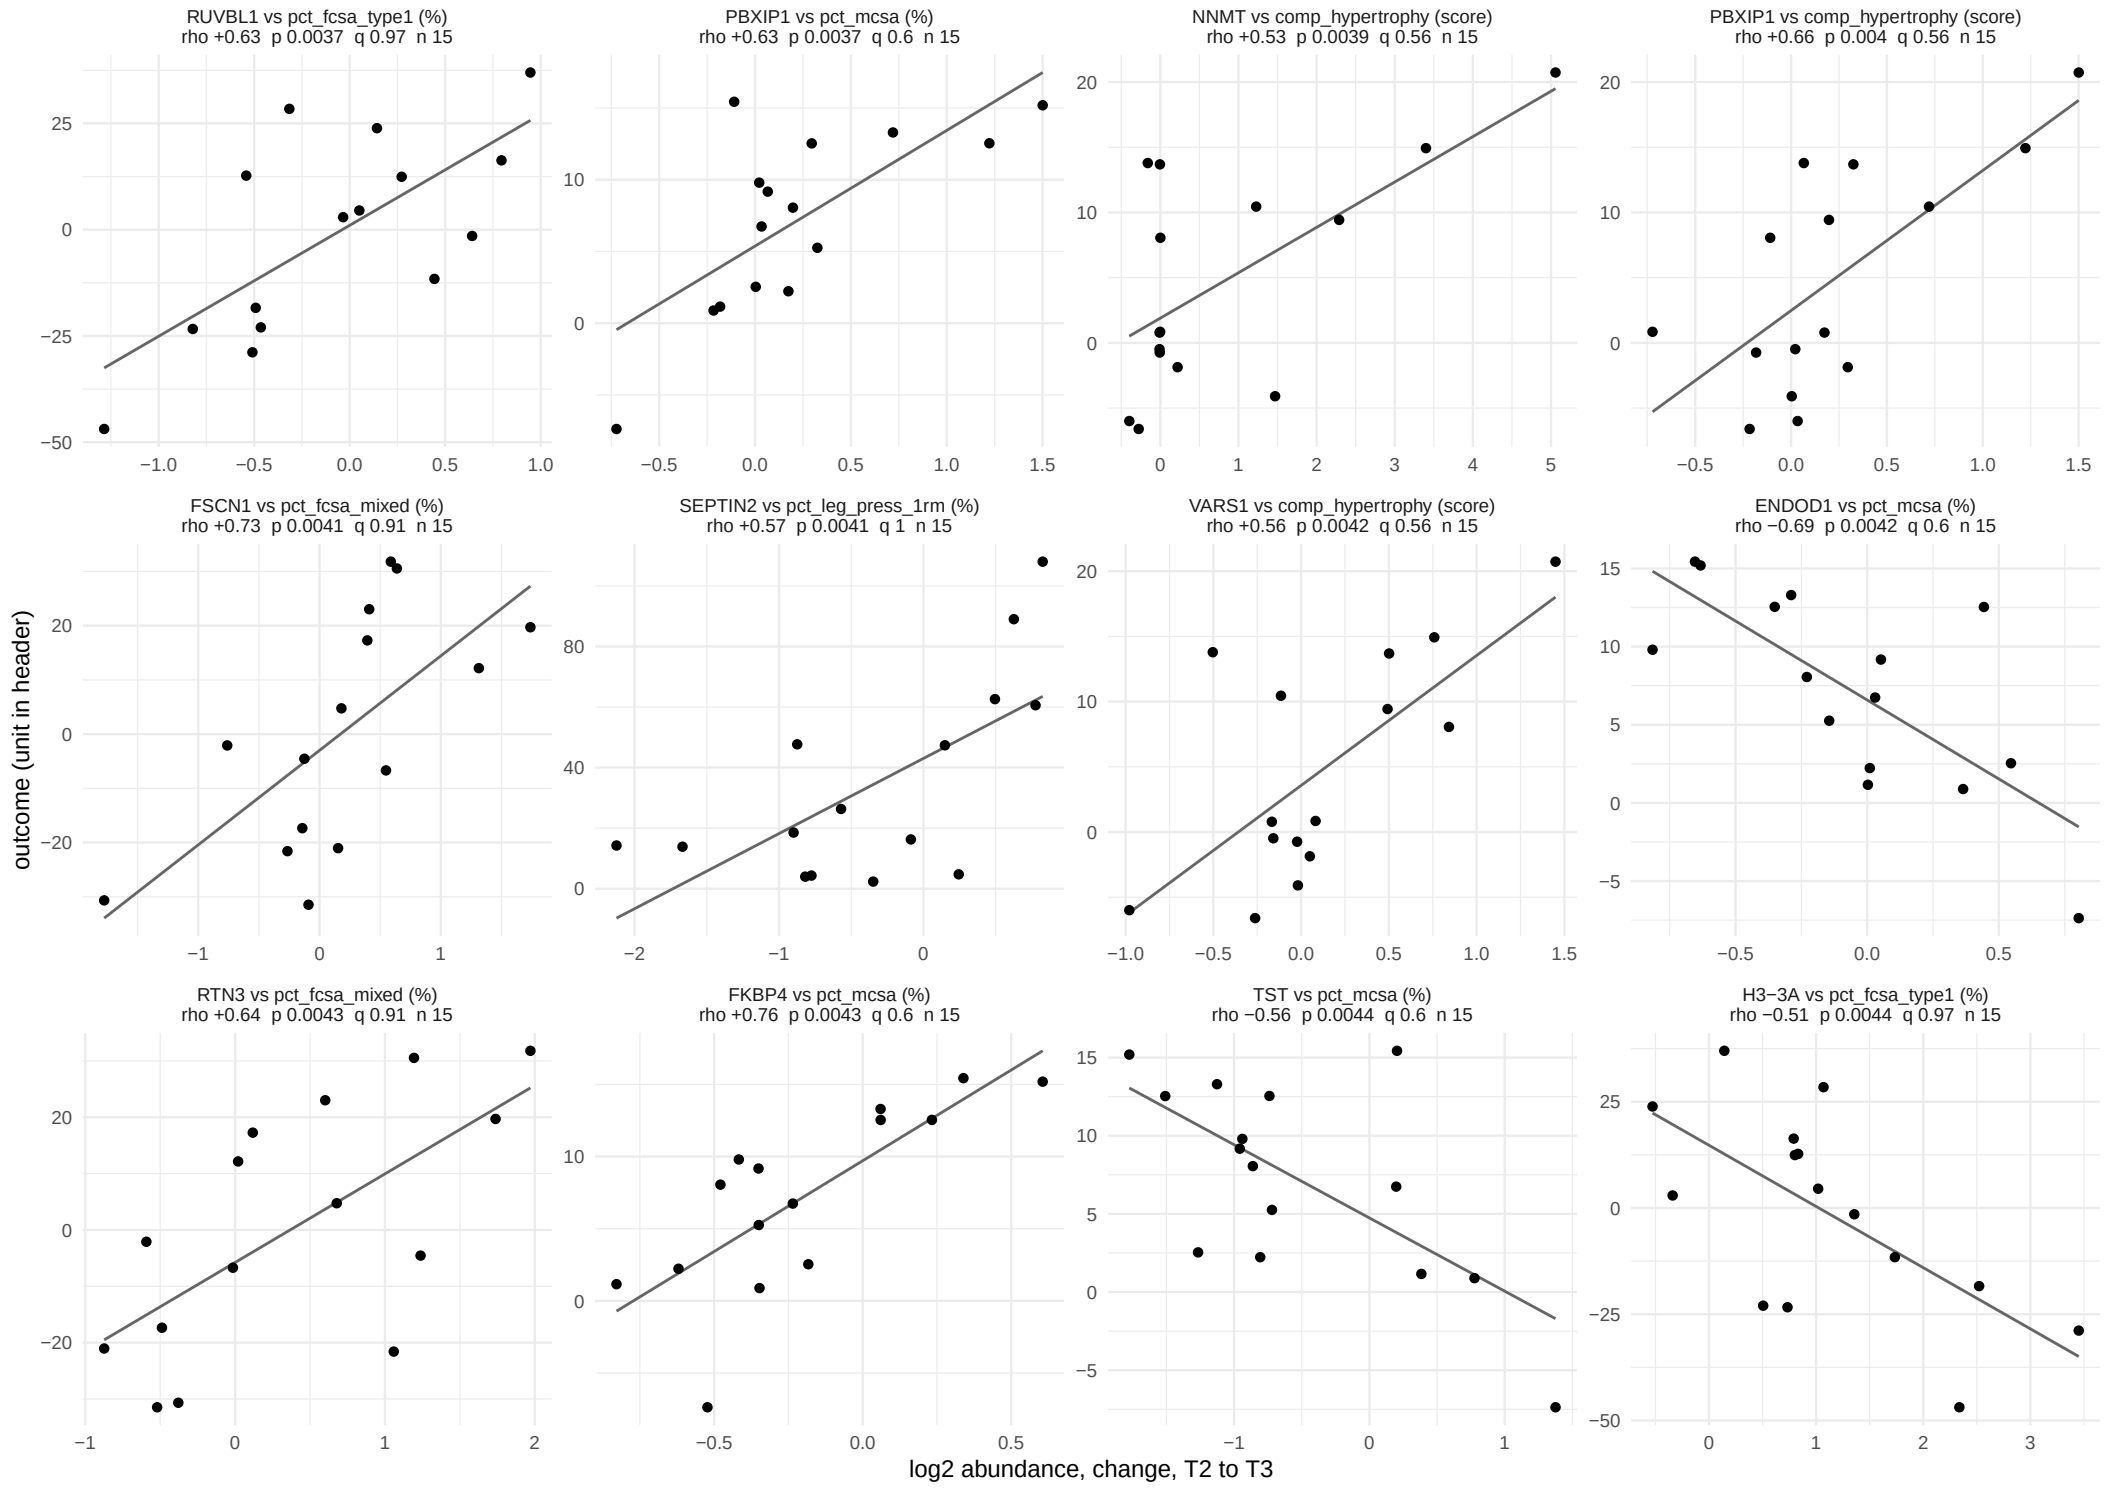

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, acute window


629 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 4 of 53.

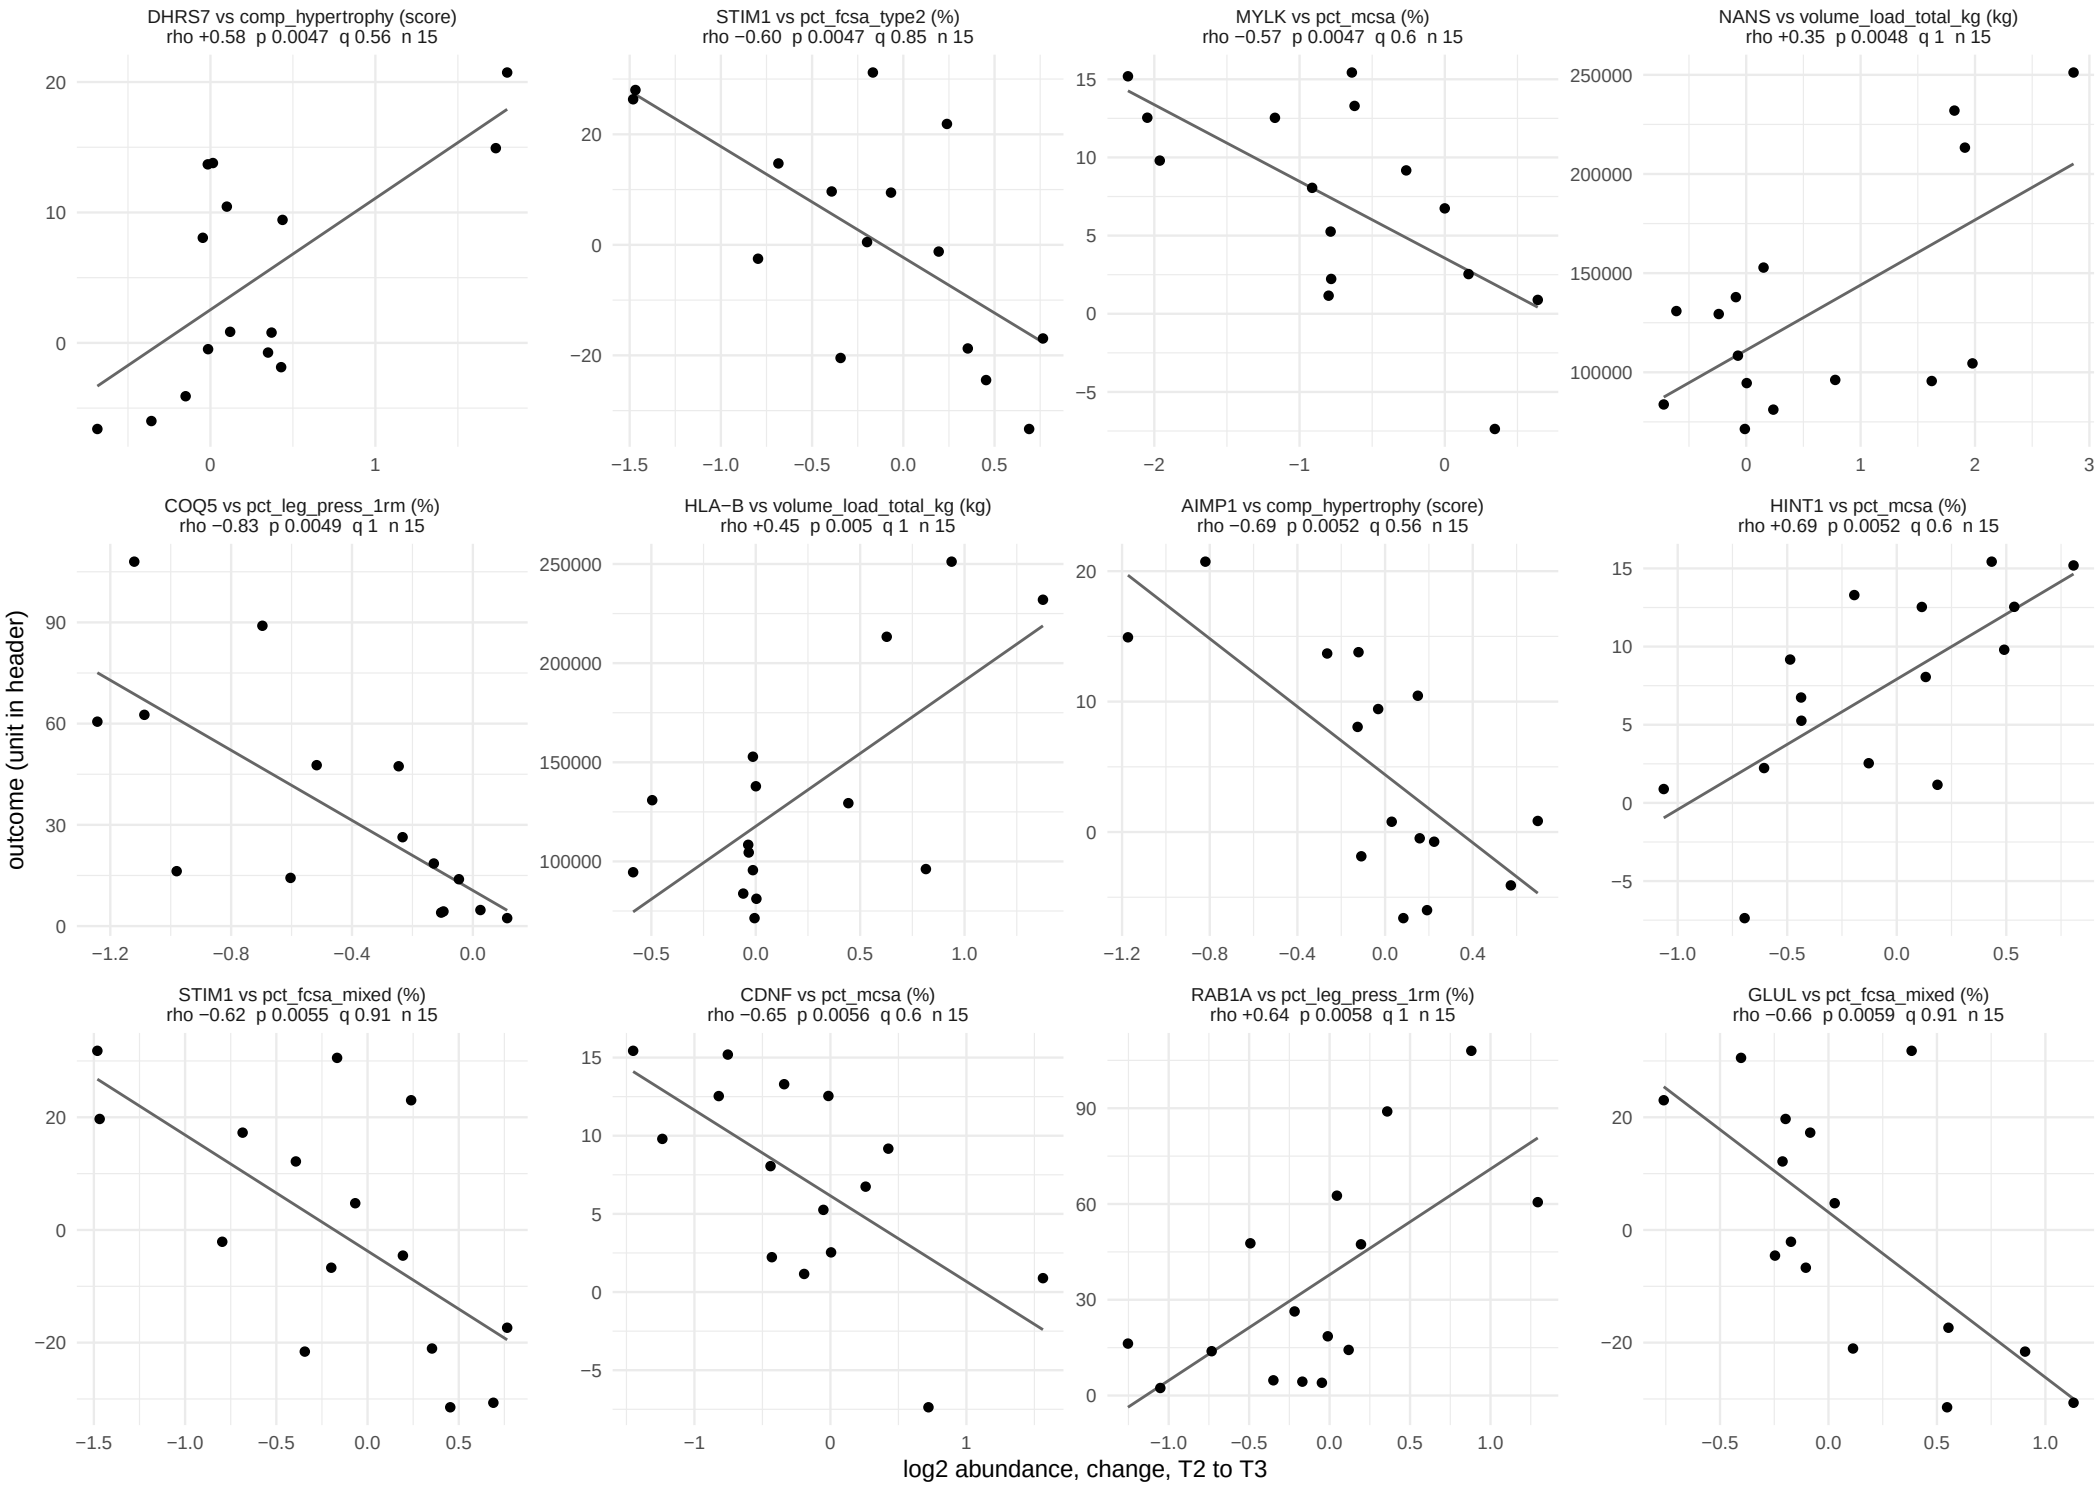

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, acute window


629 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 5 of 53.

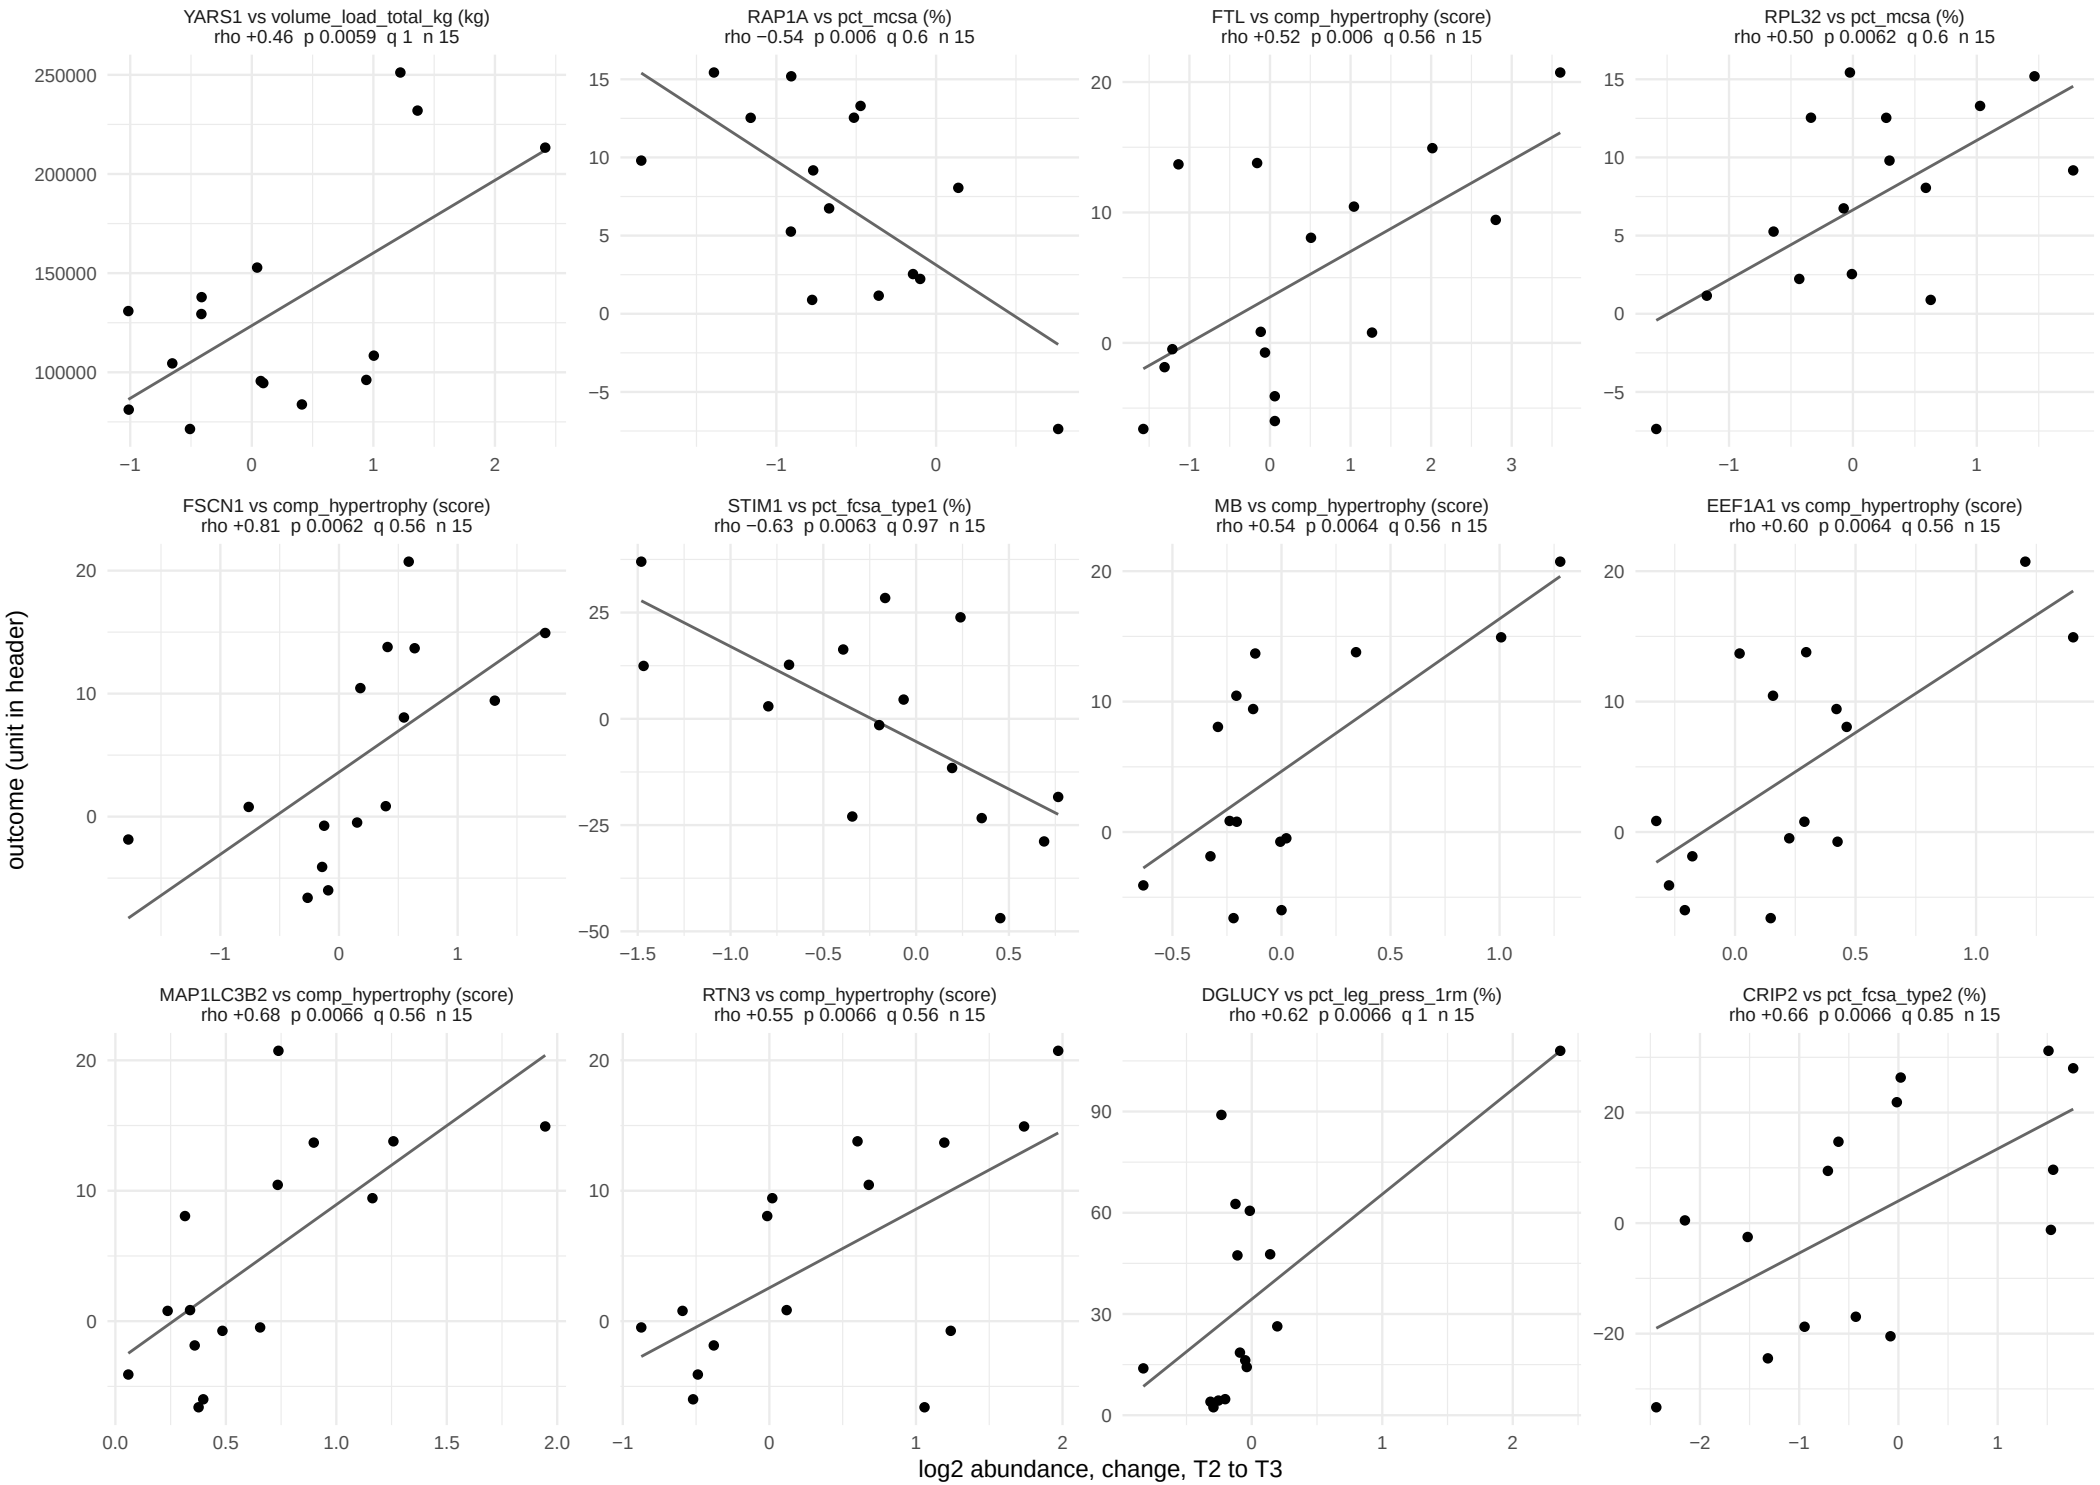

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, acute window


629 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 6 of 53.

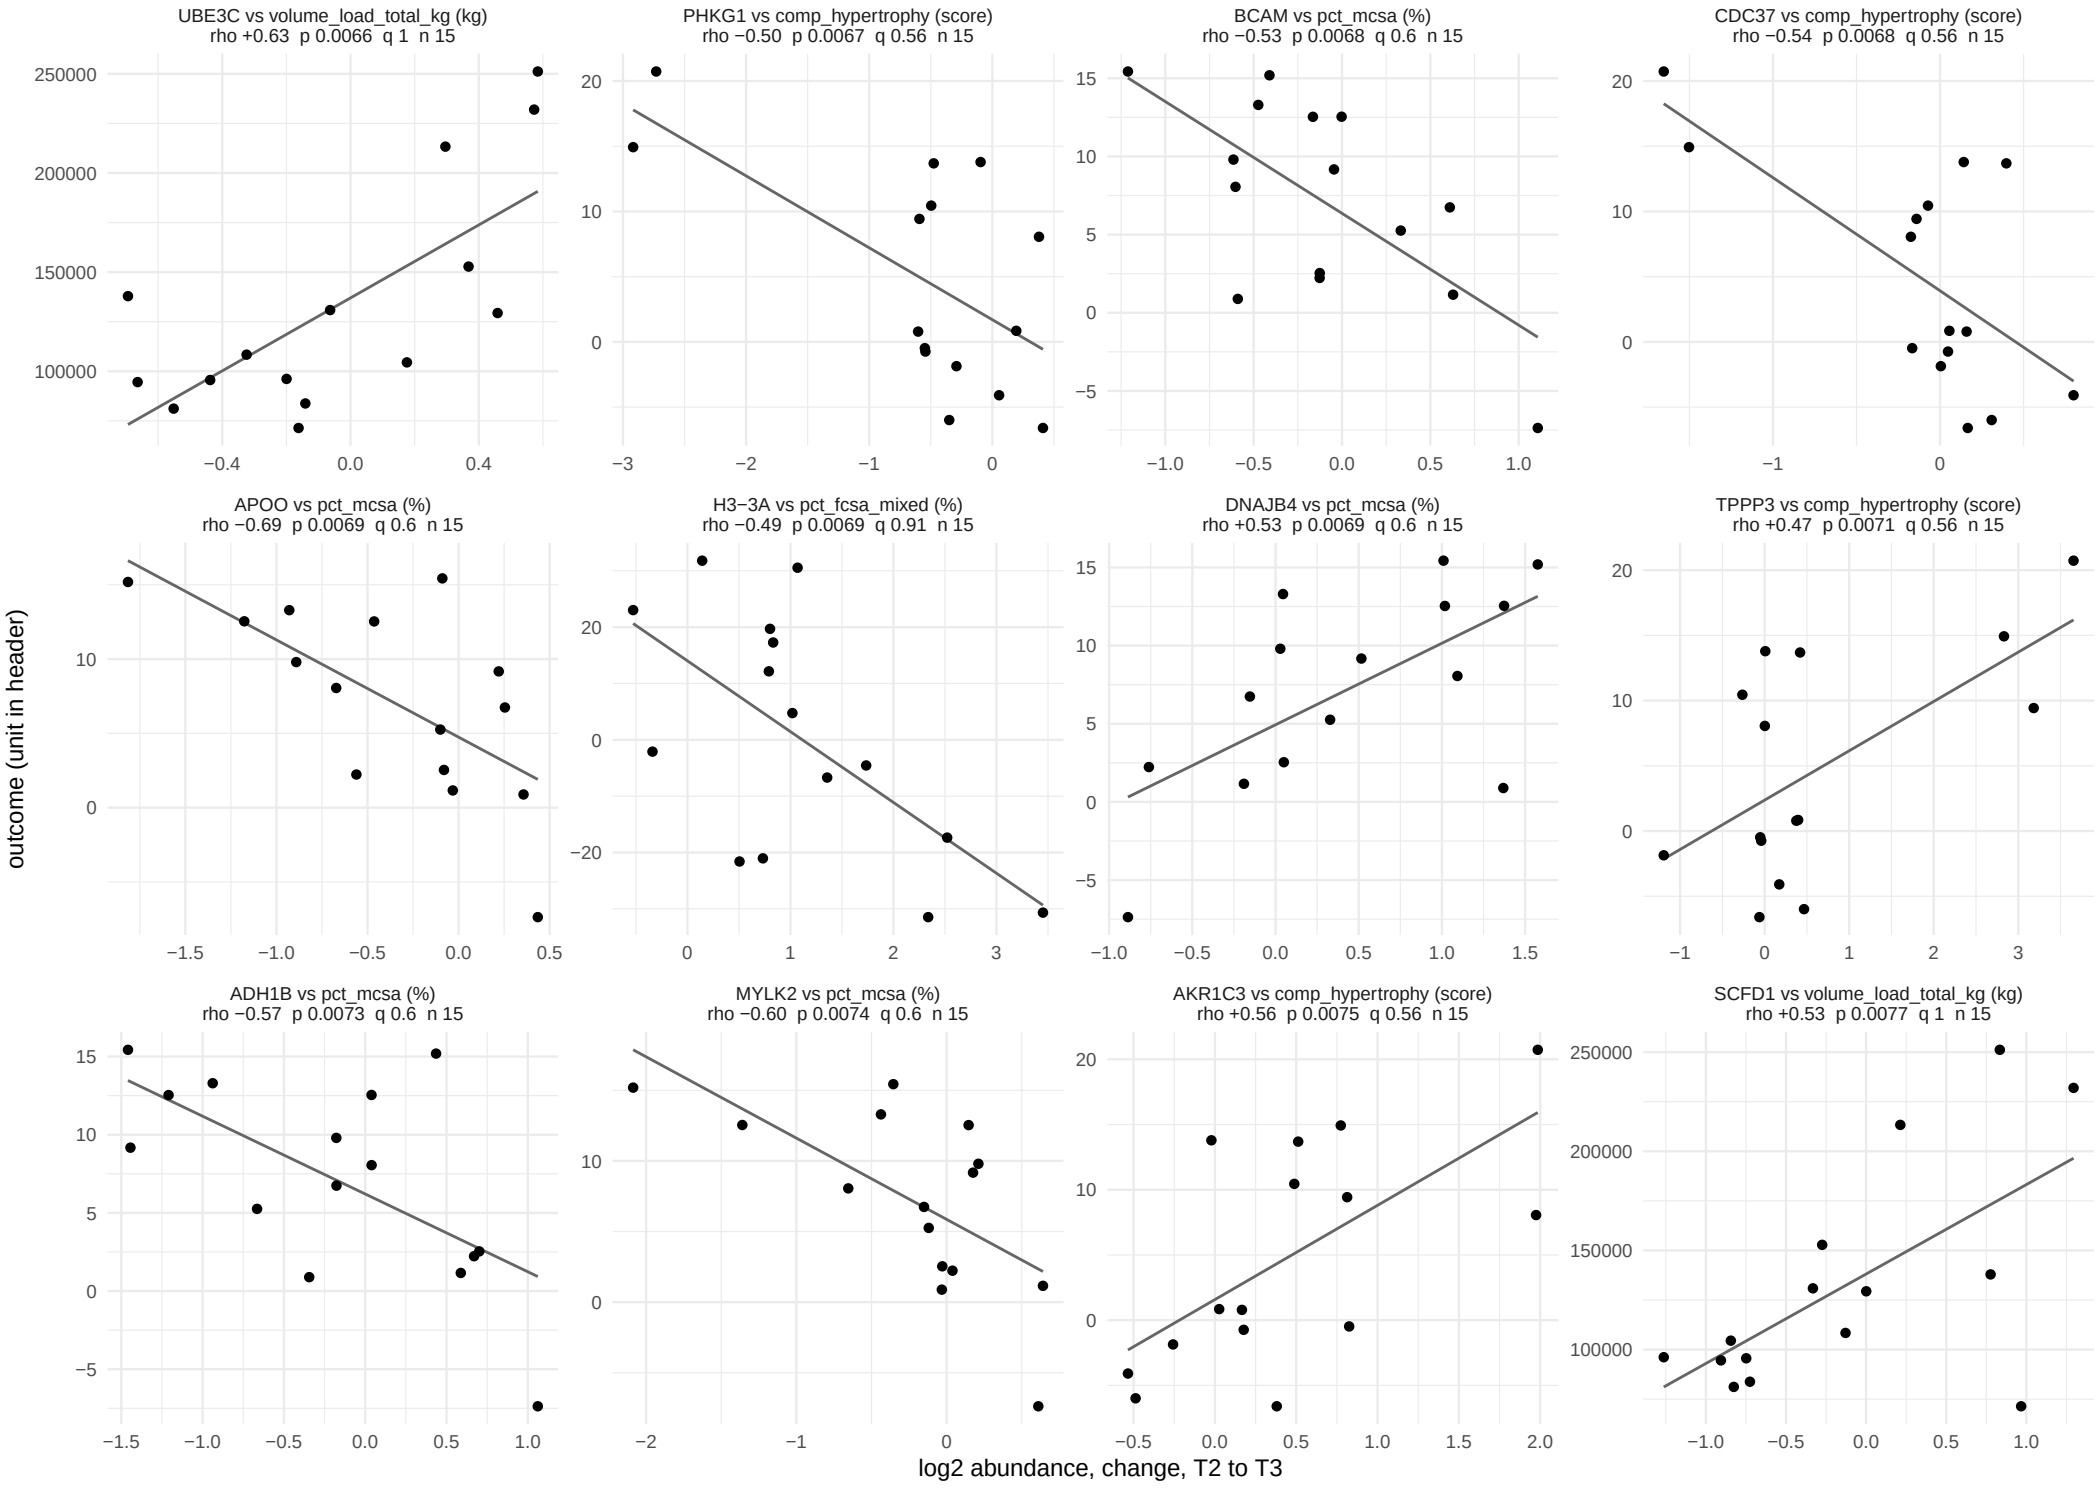

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, acute window


629 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 7 of 53.

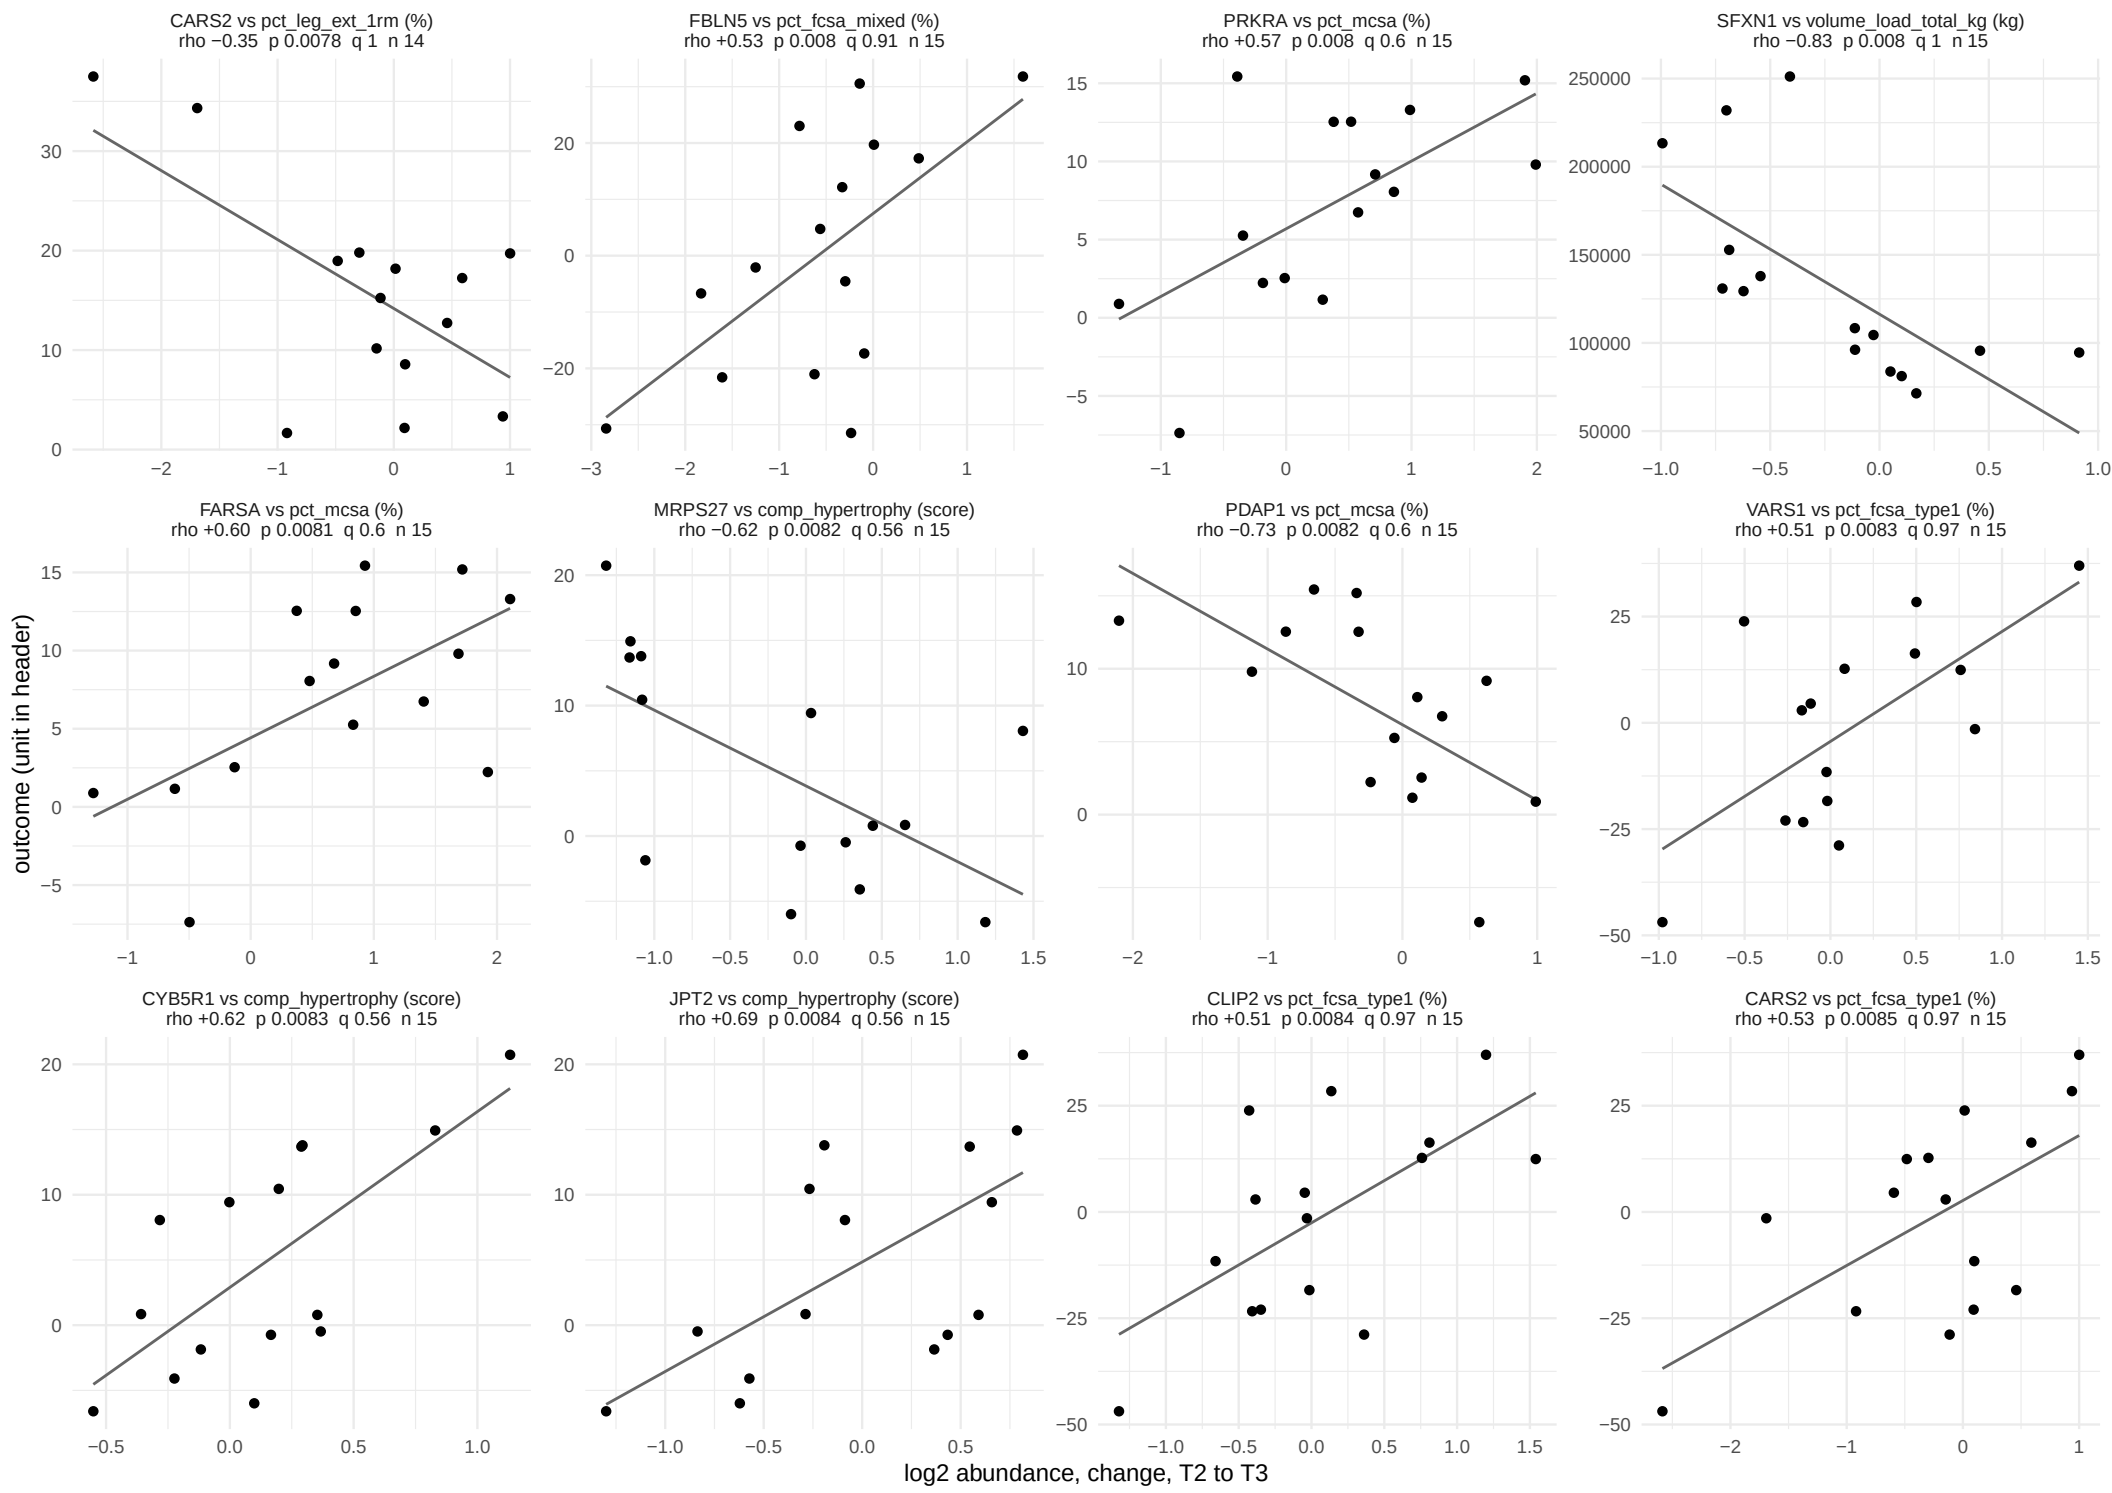

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, acute window


629 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 8 of 53.

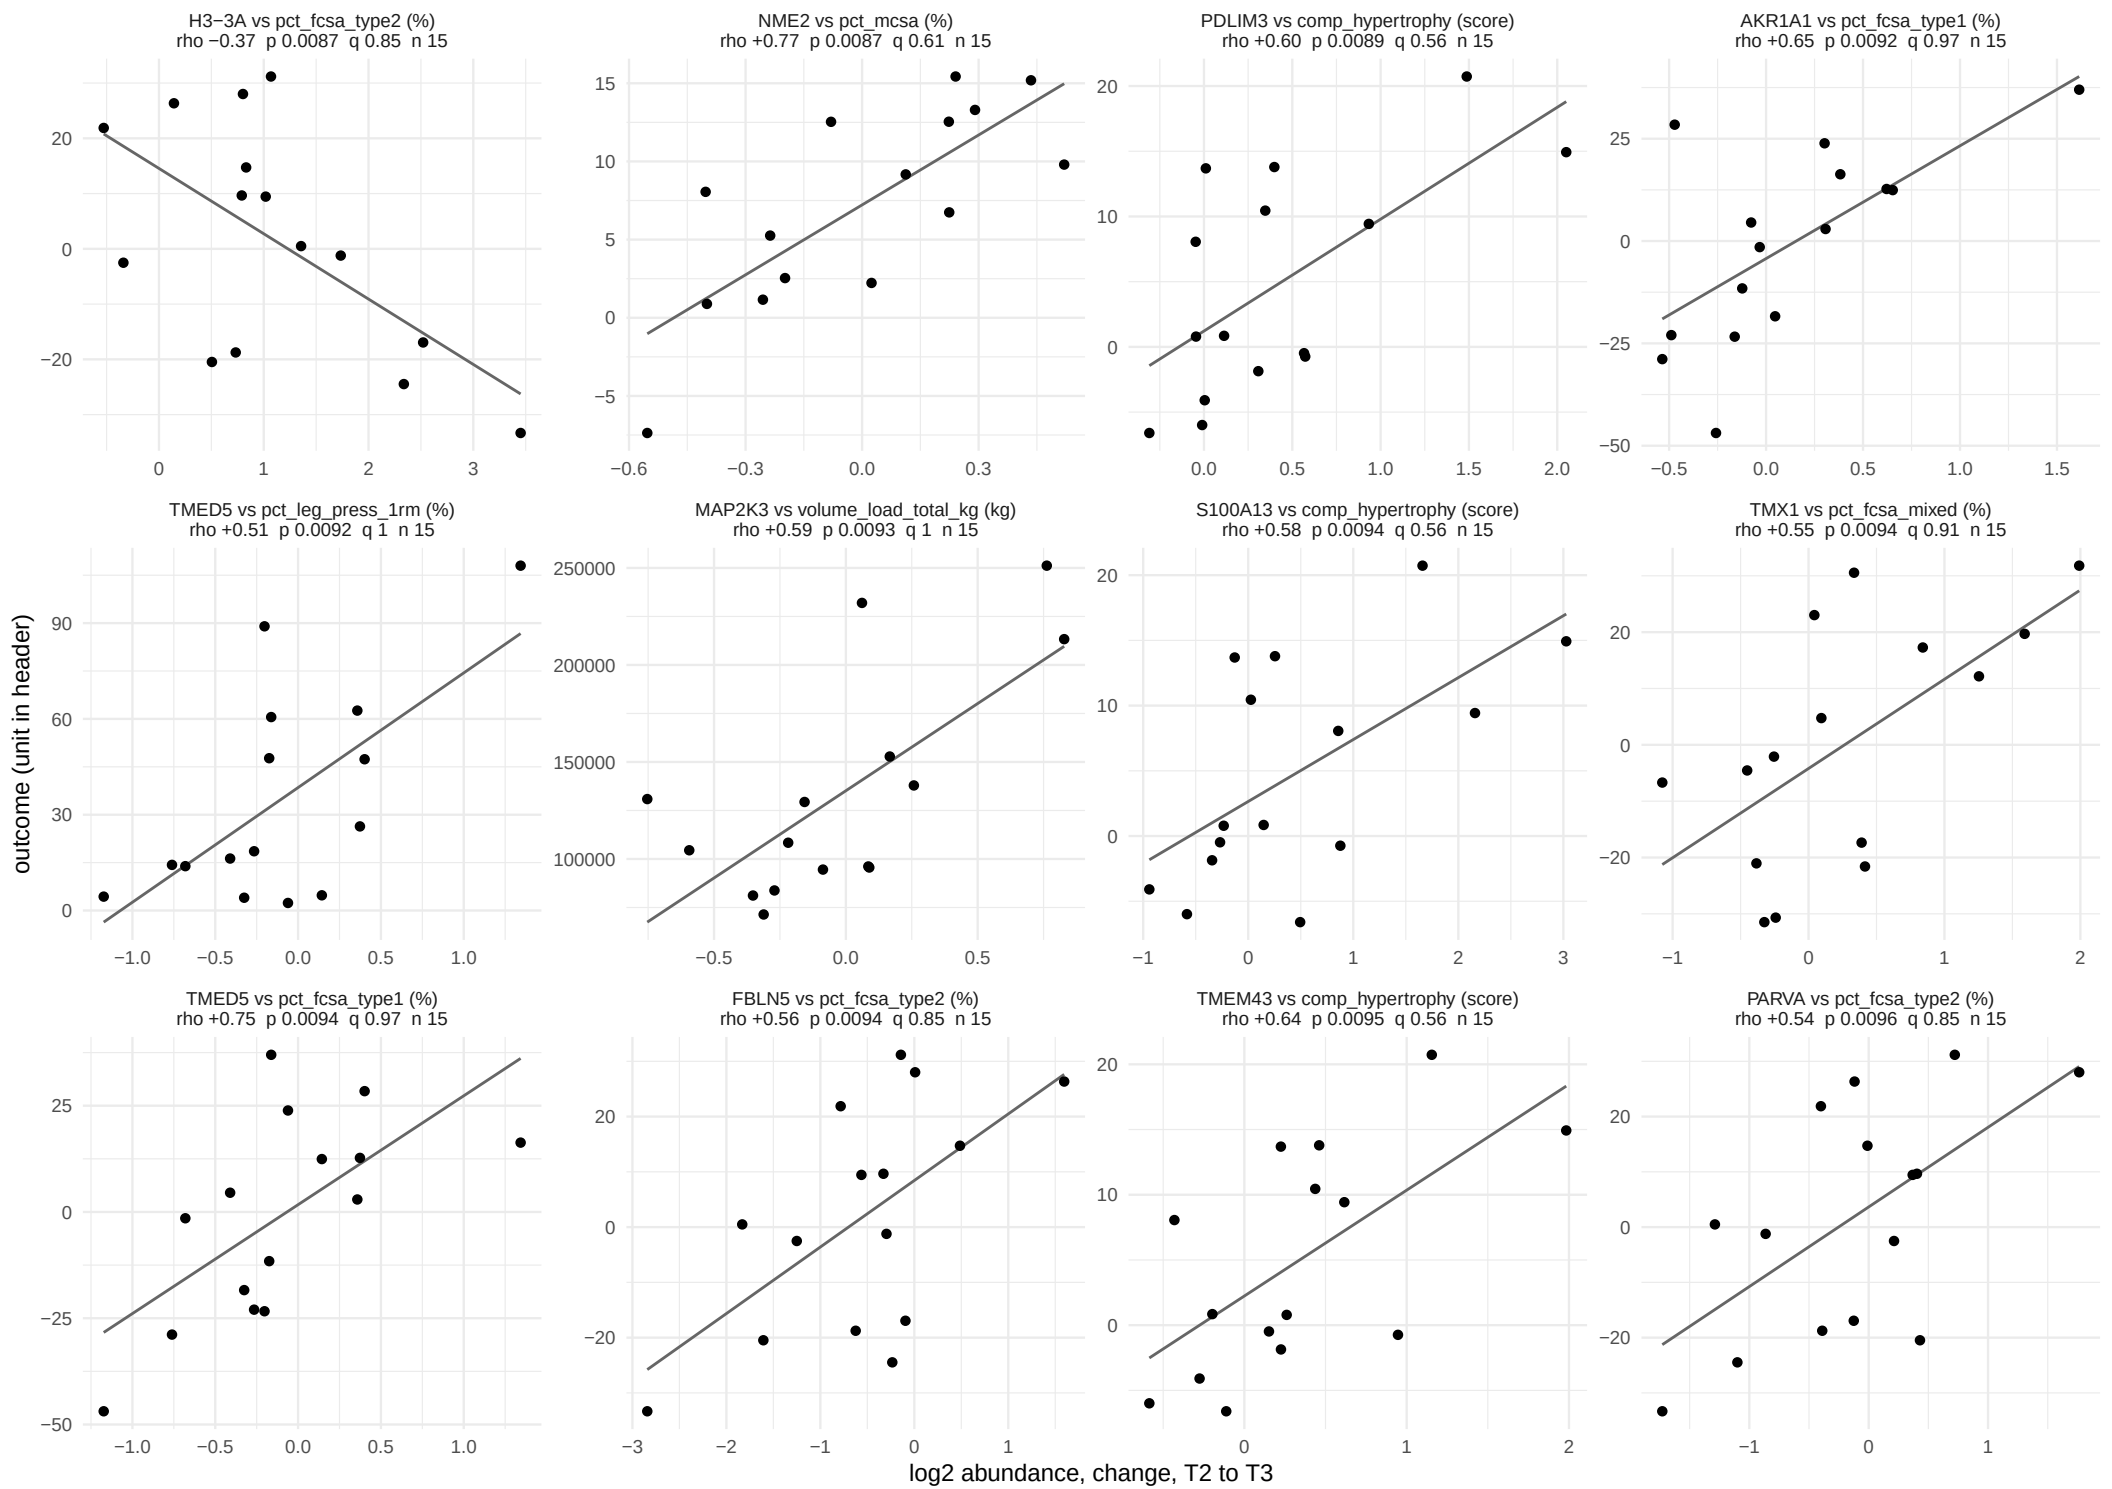

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, acute window


629 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 9 of 53.

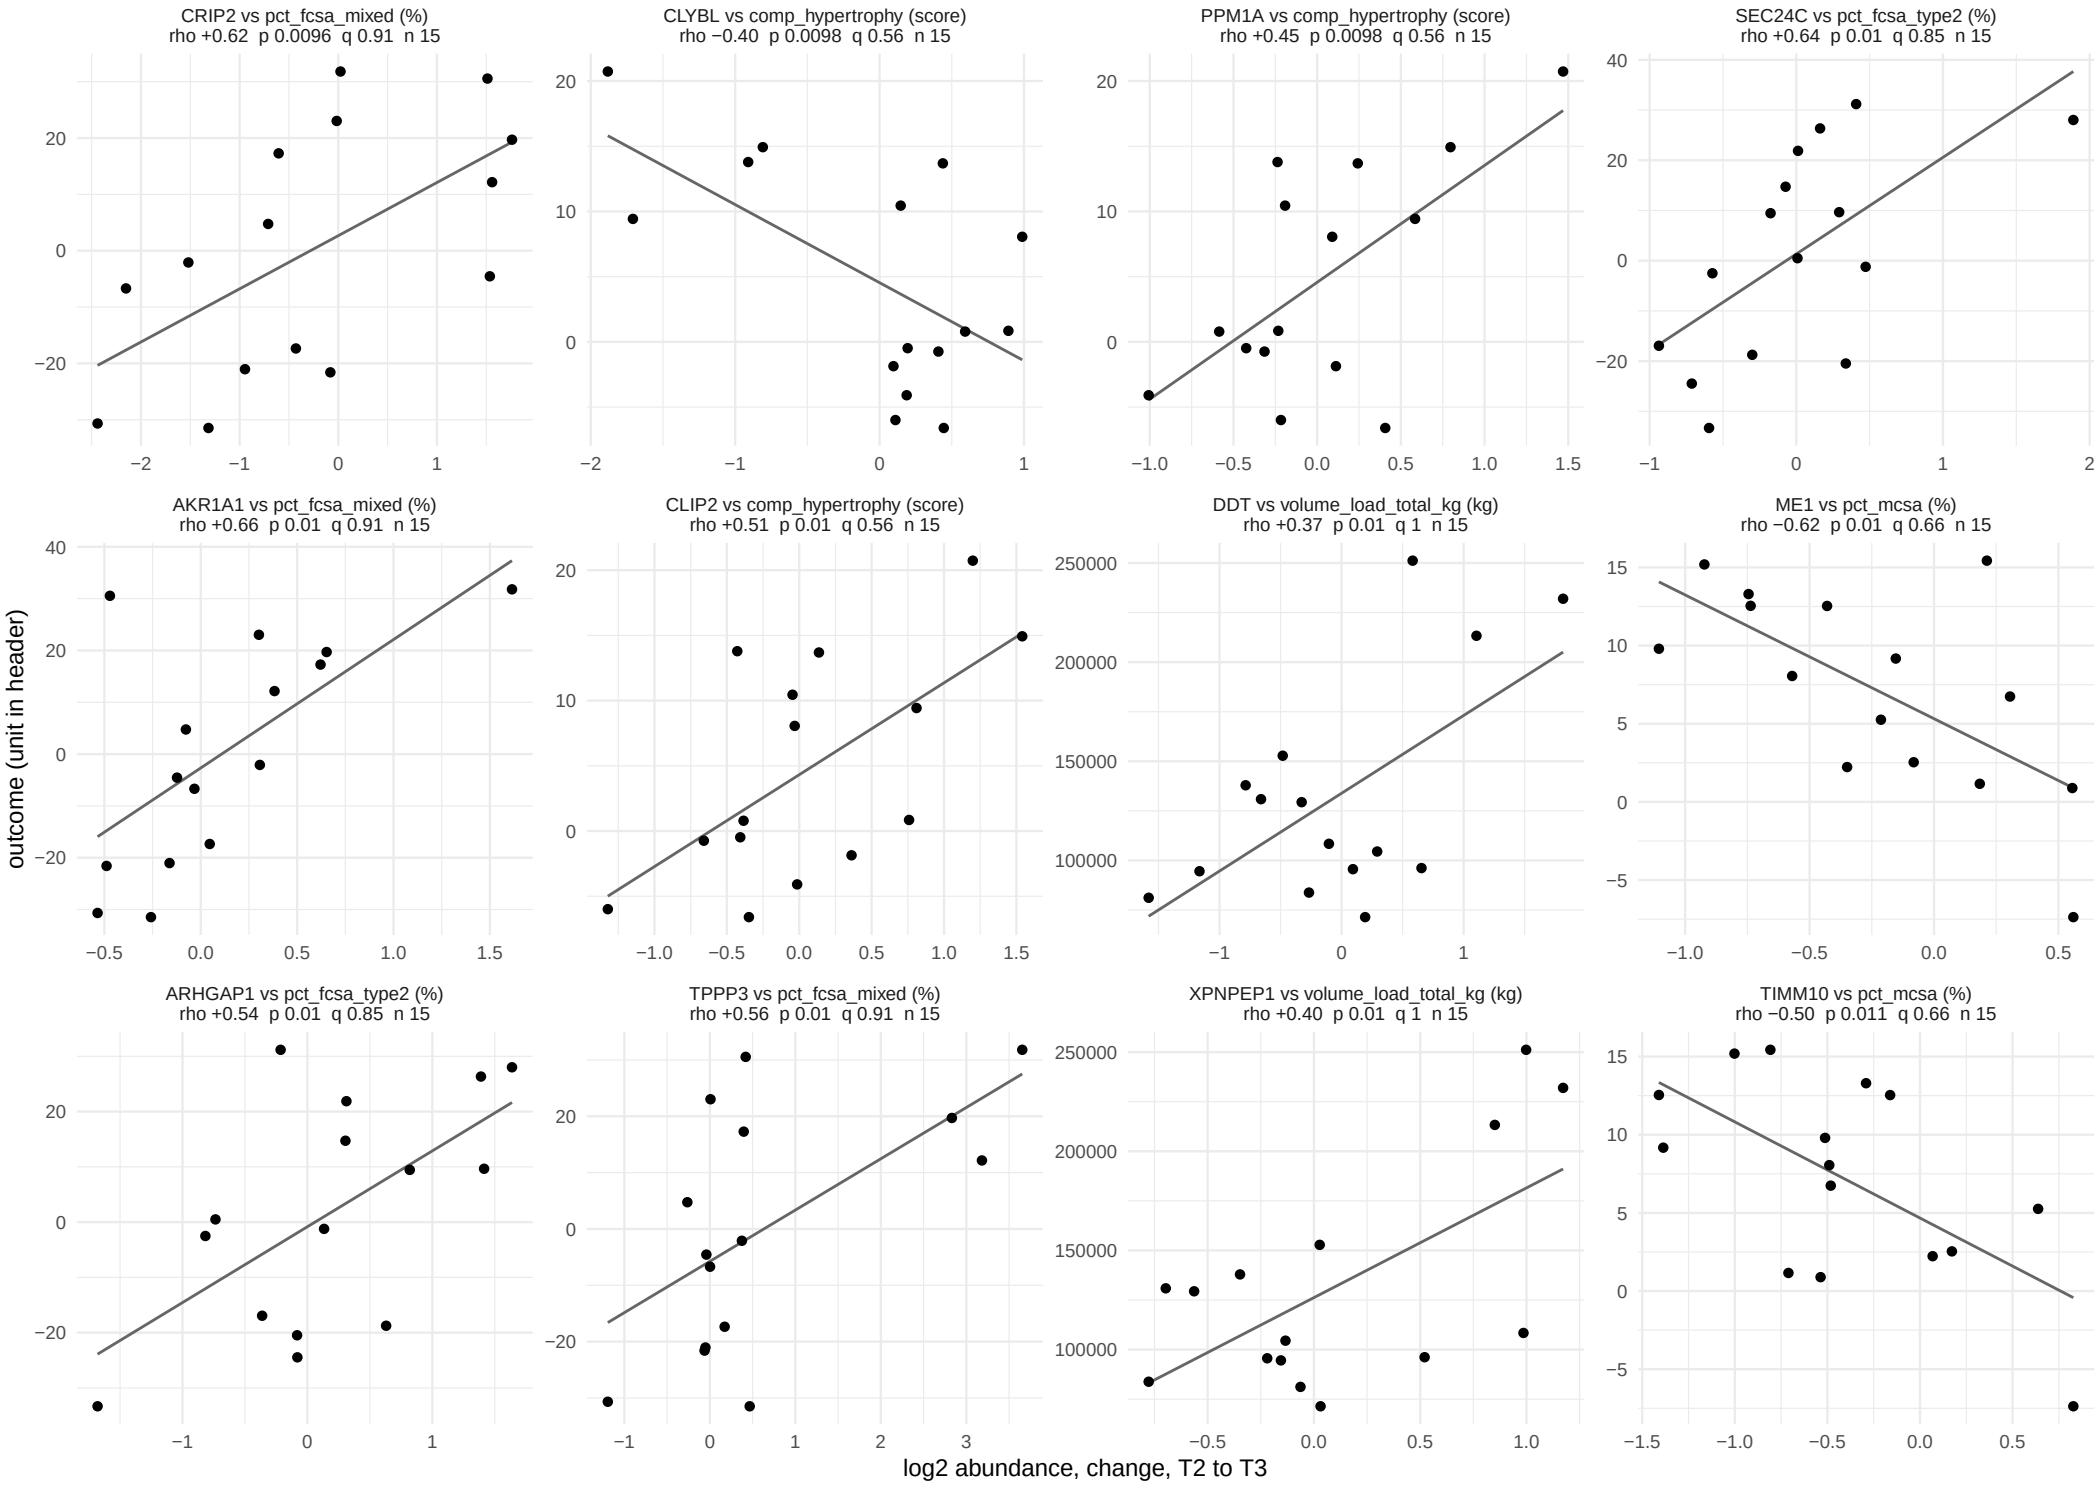

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, acute window


629 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 10 of 53.

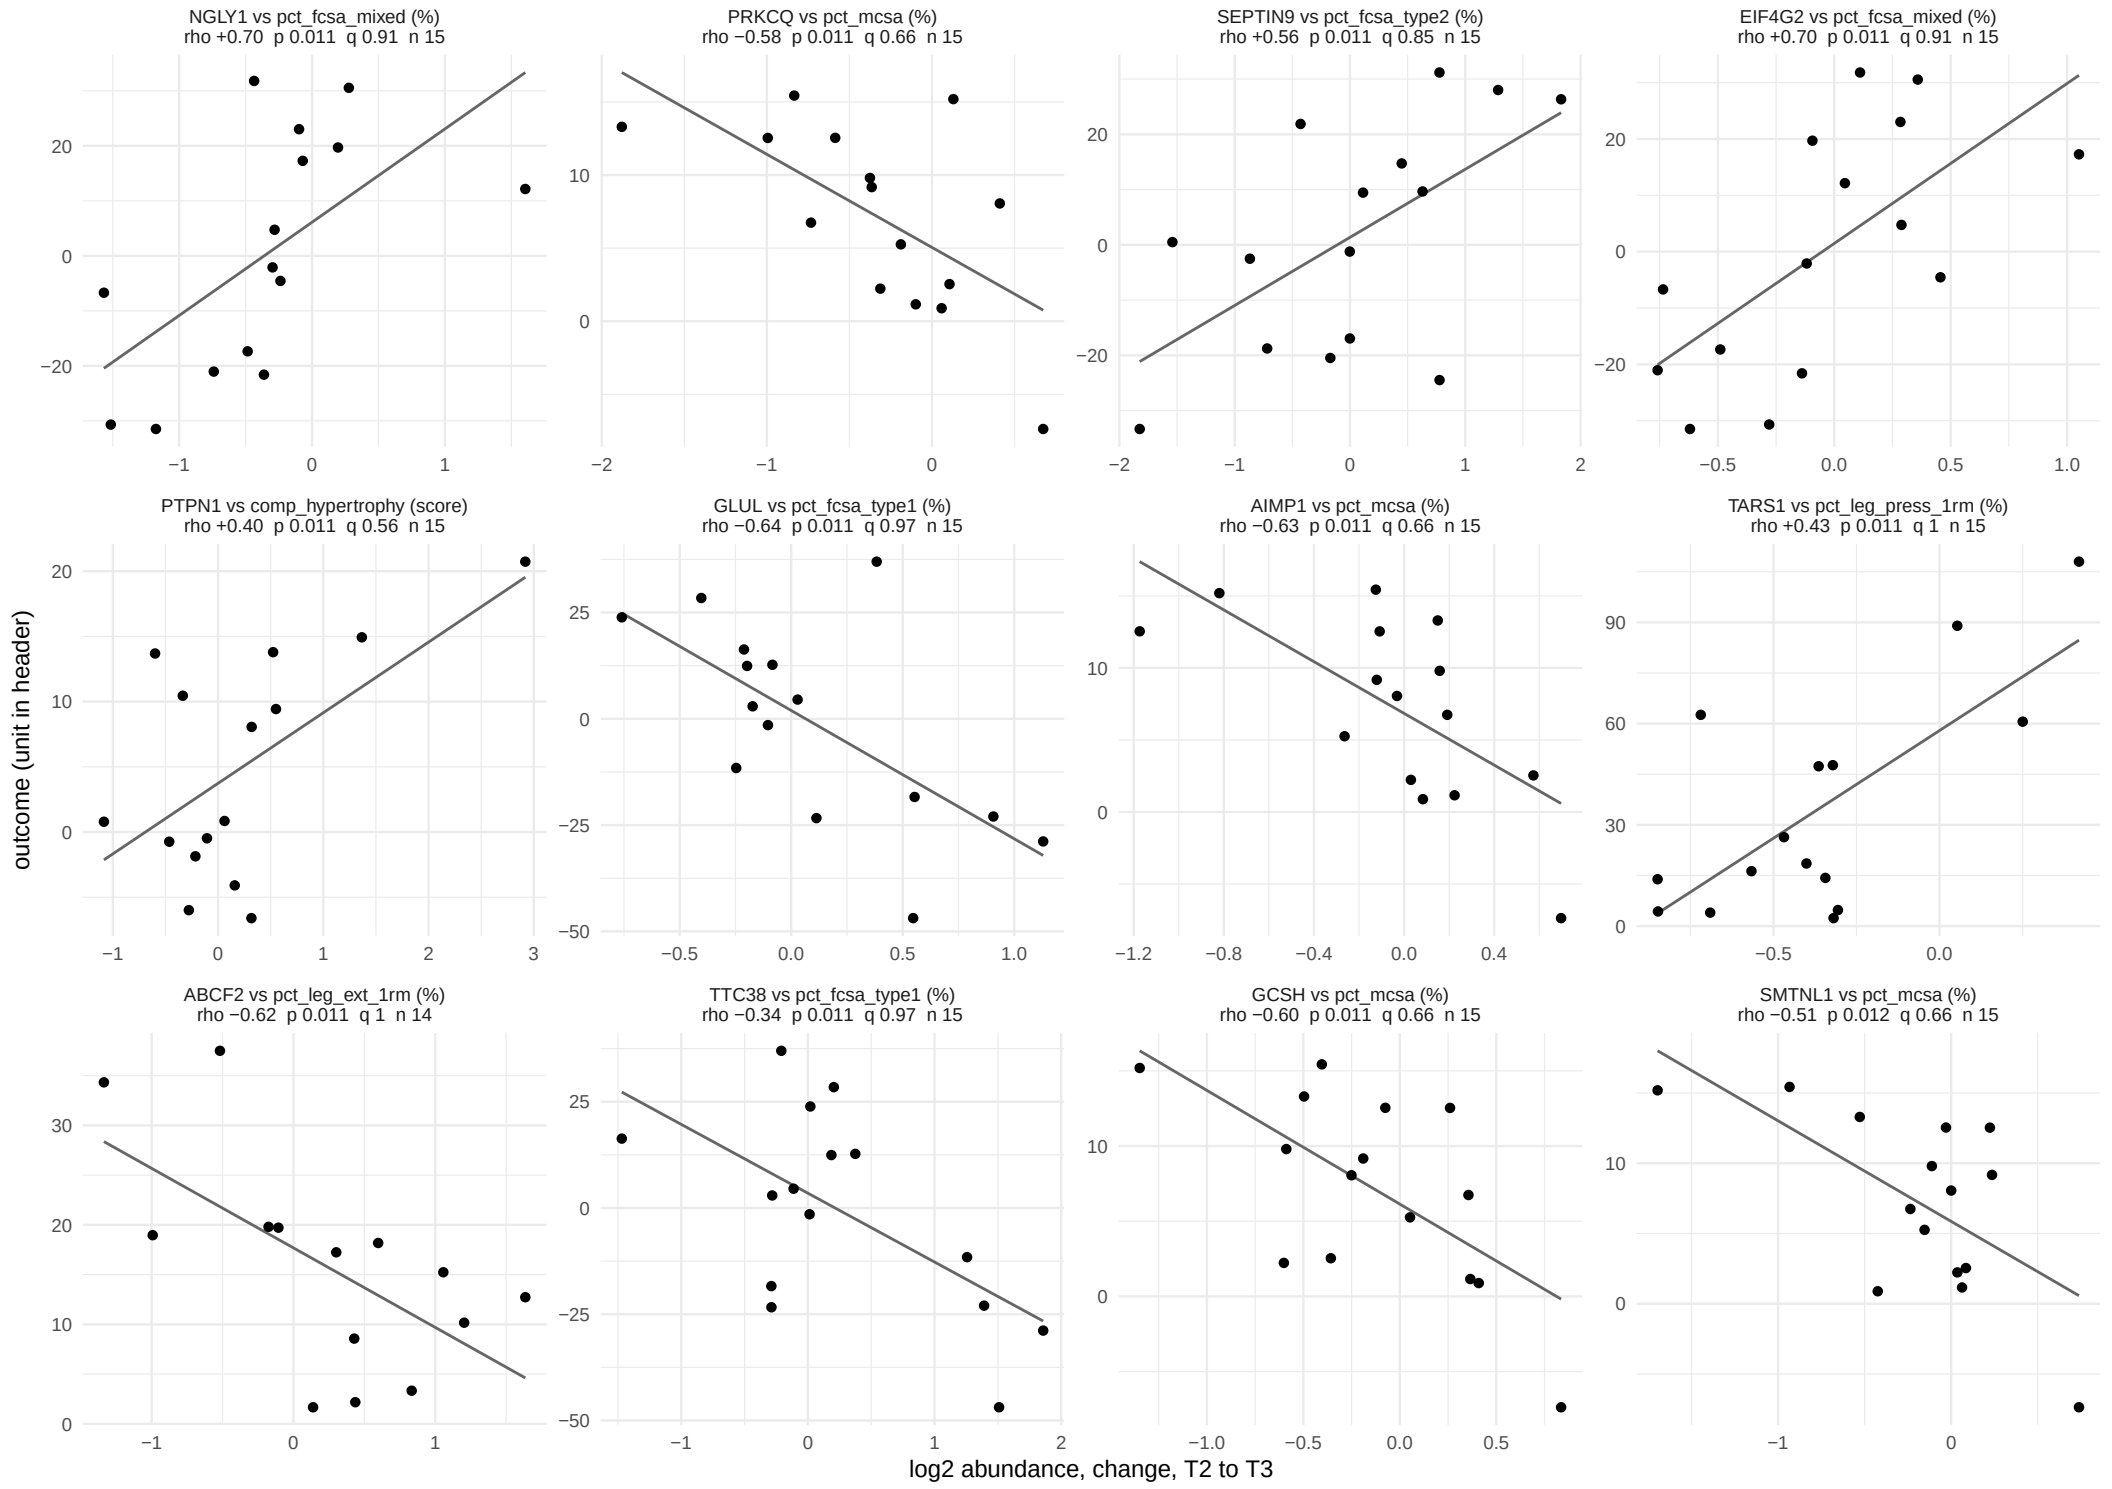

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, acute window


629 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 11 of 53.

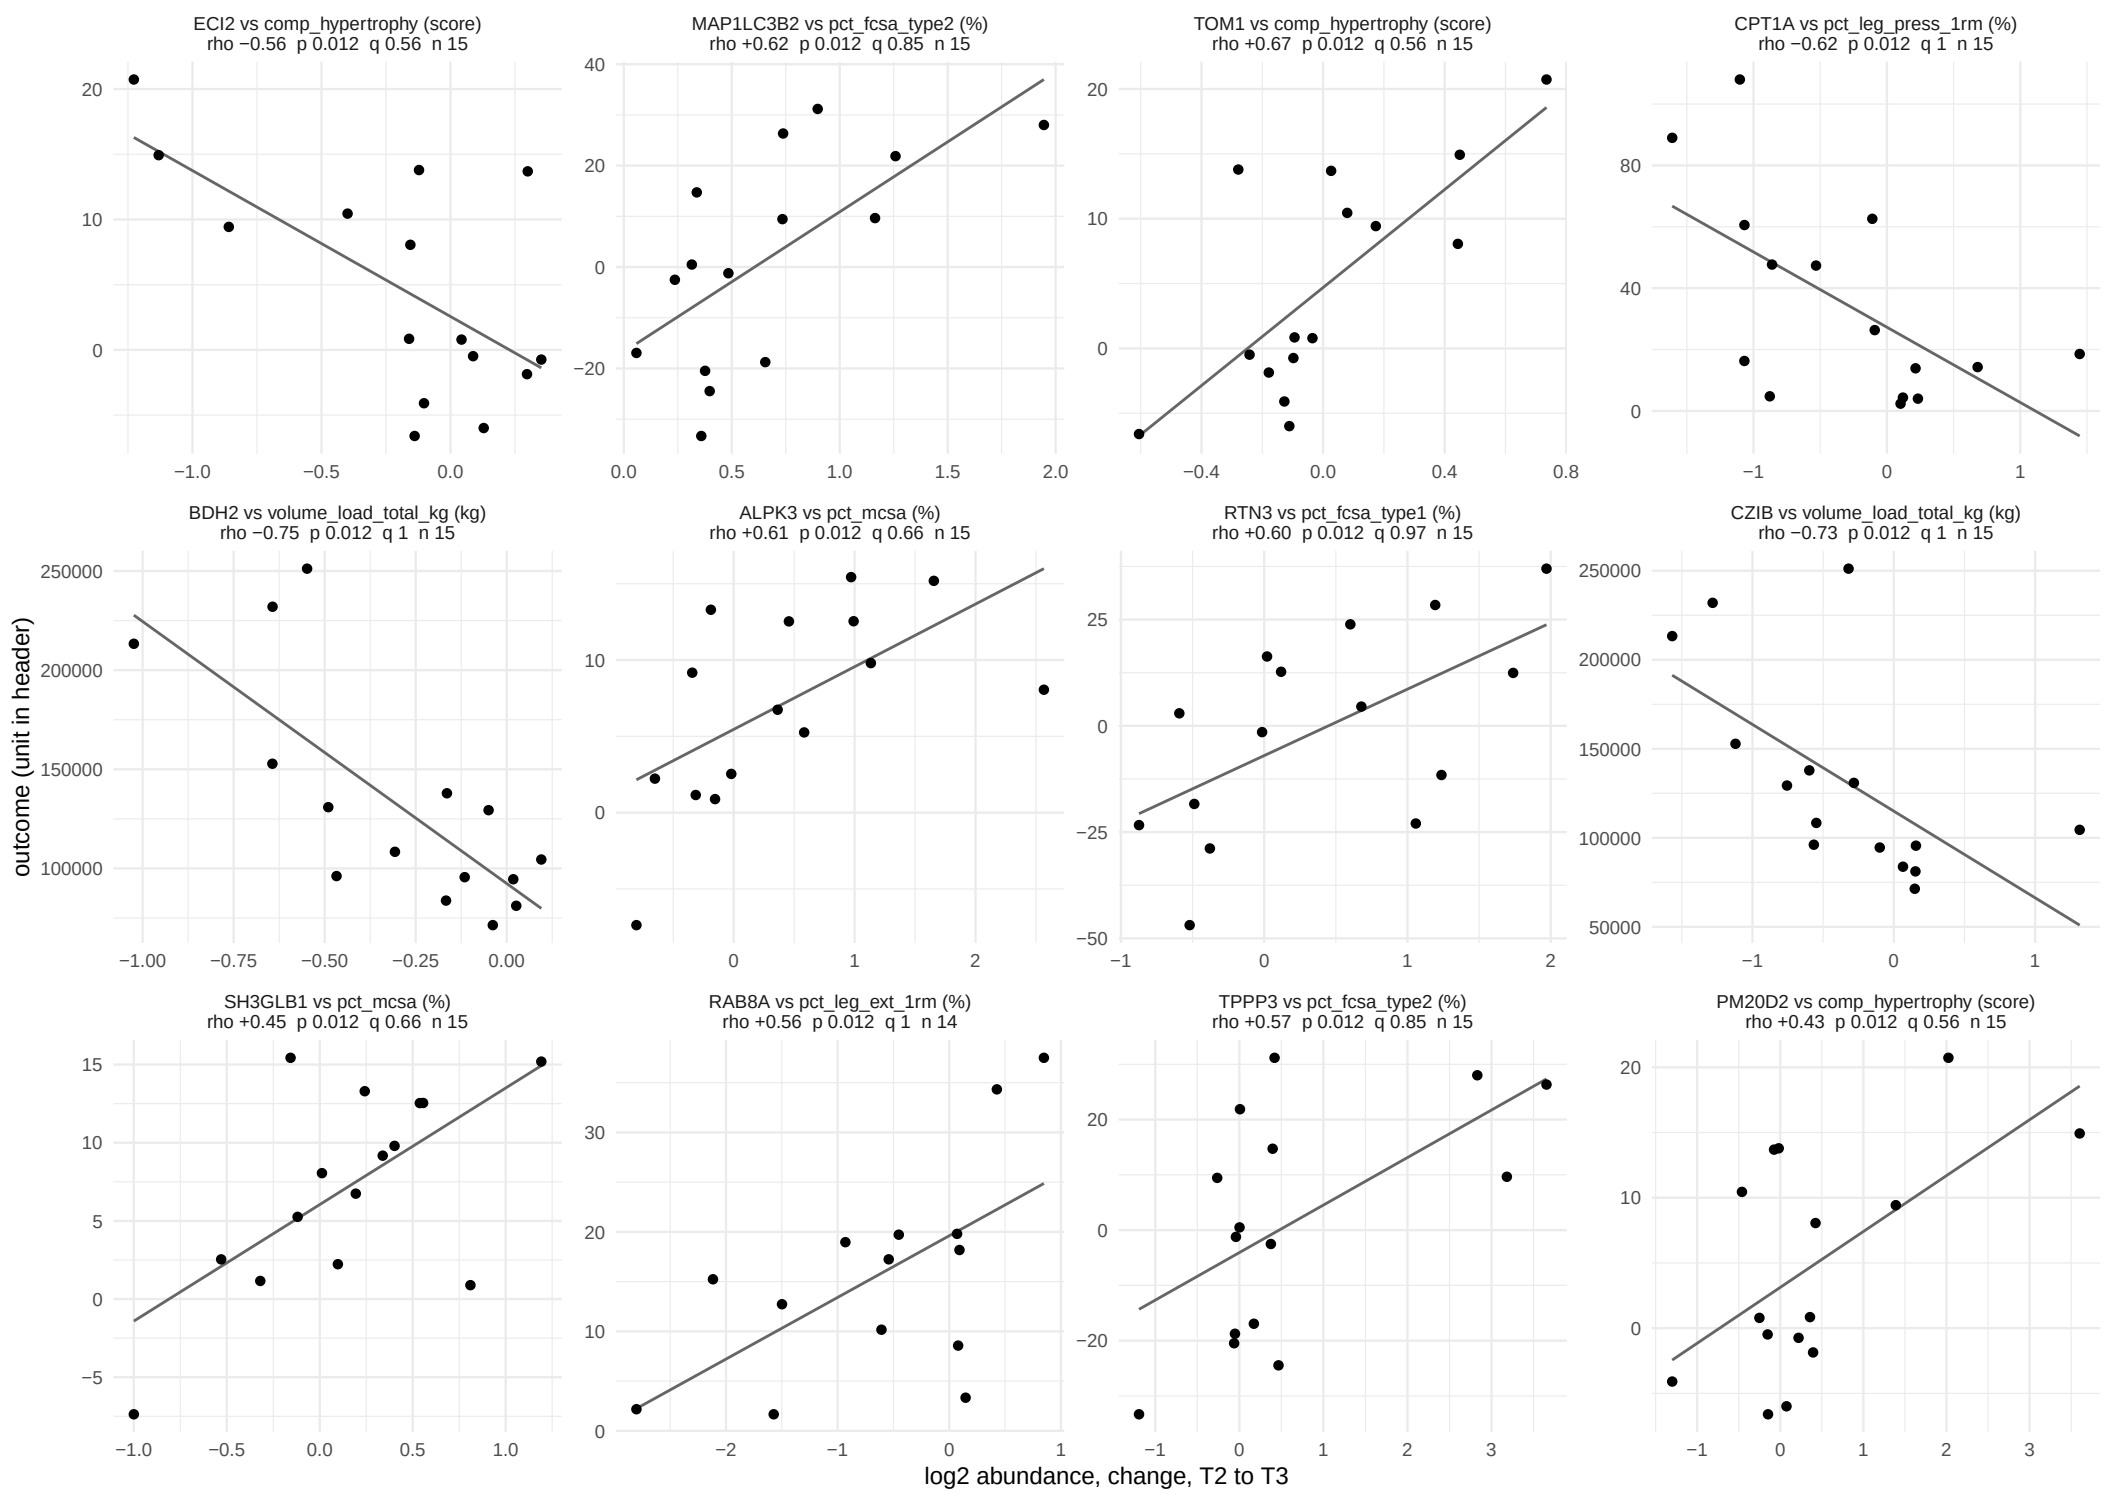

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, acute window


629 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 12 of 53.

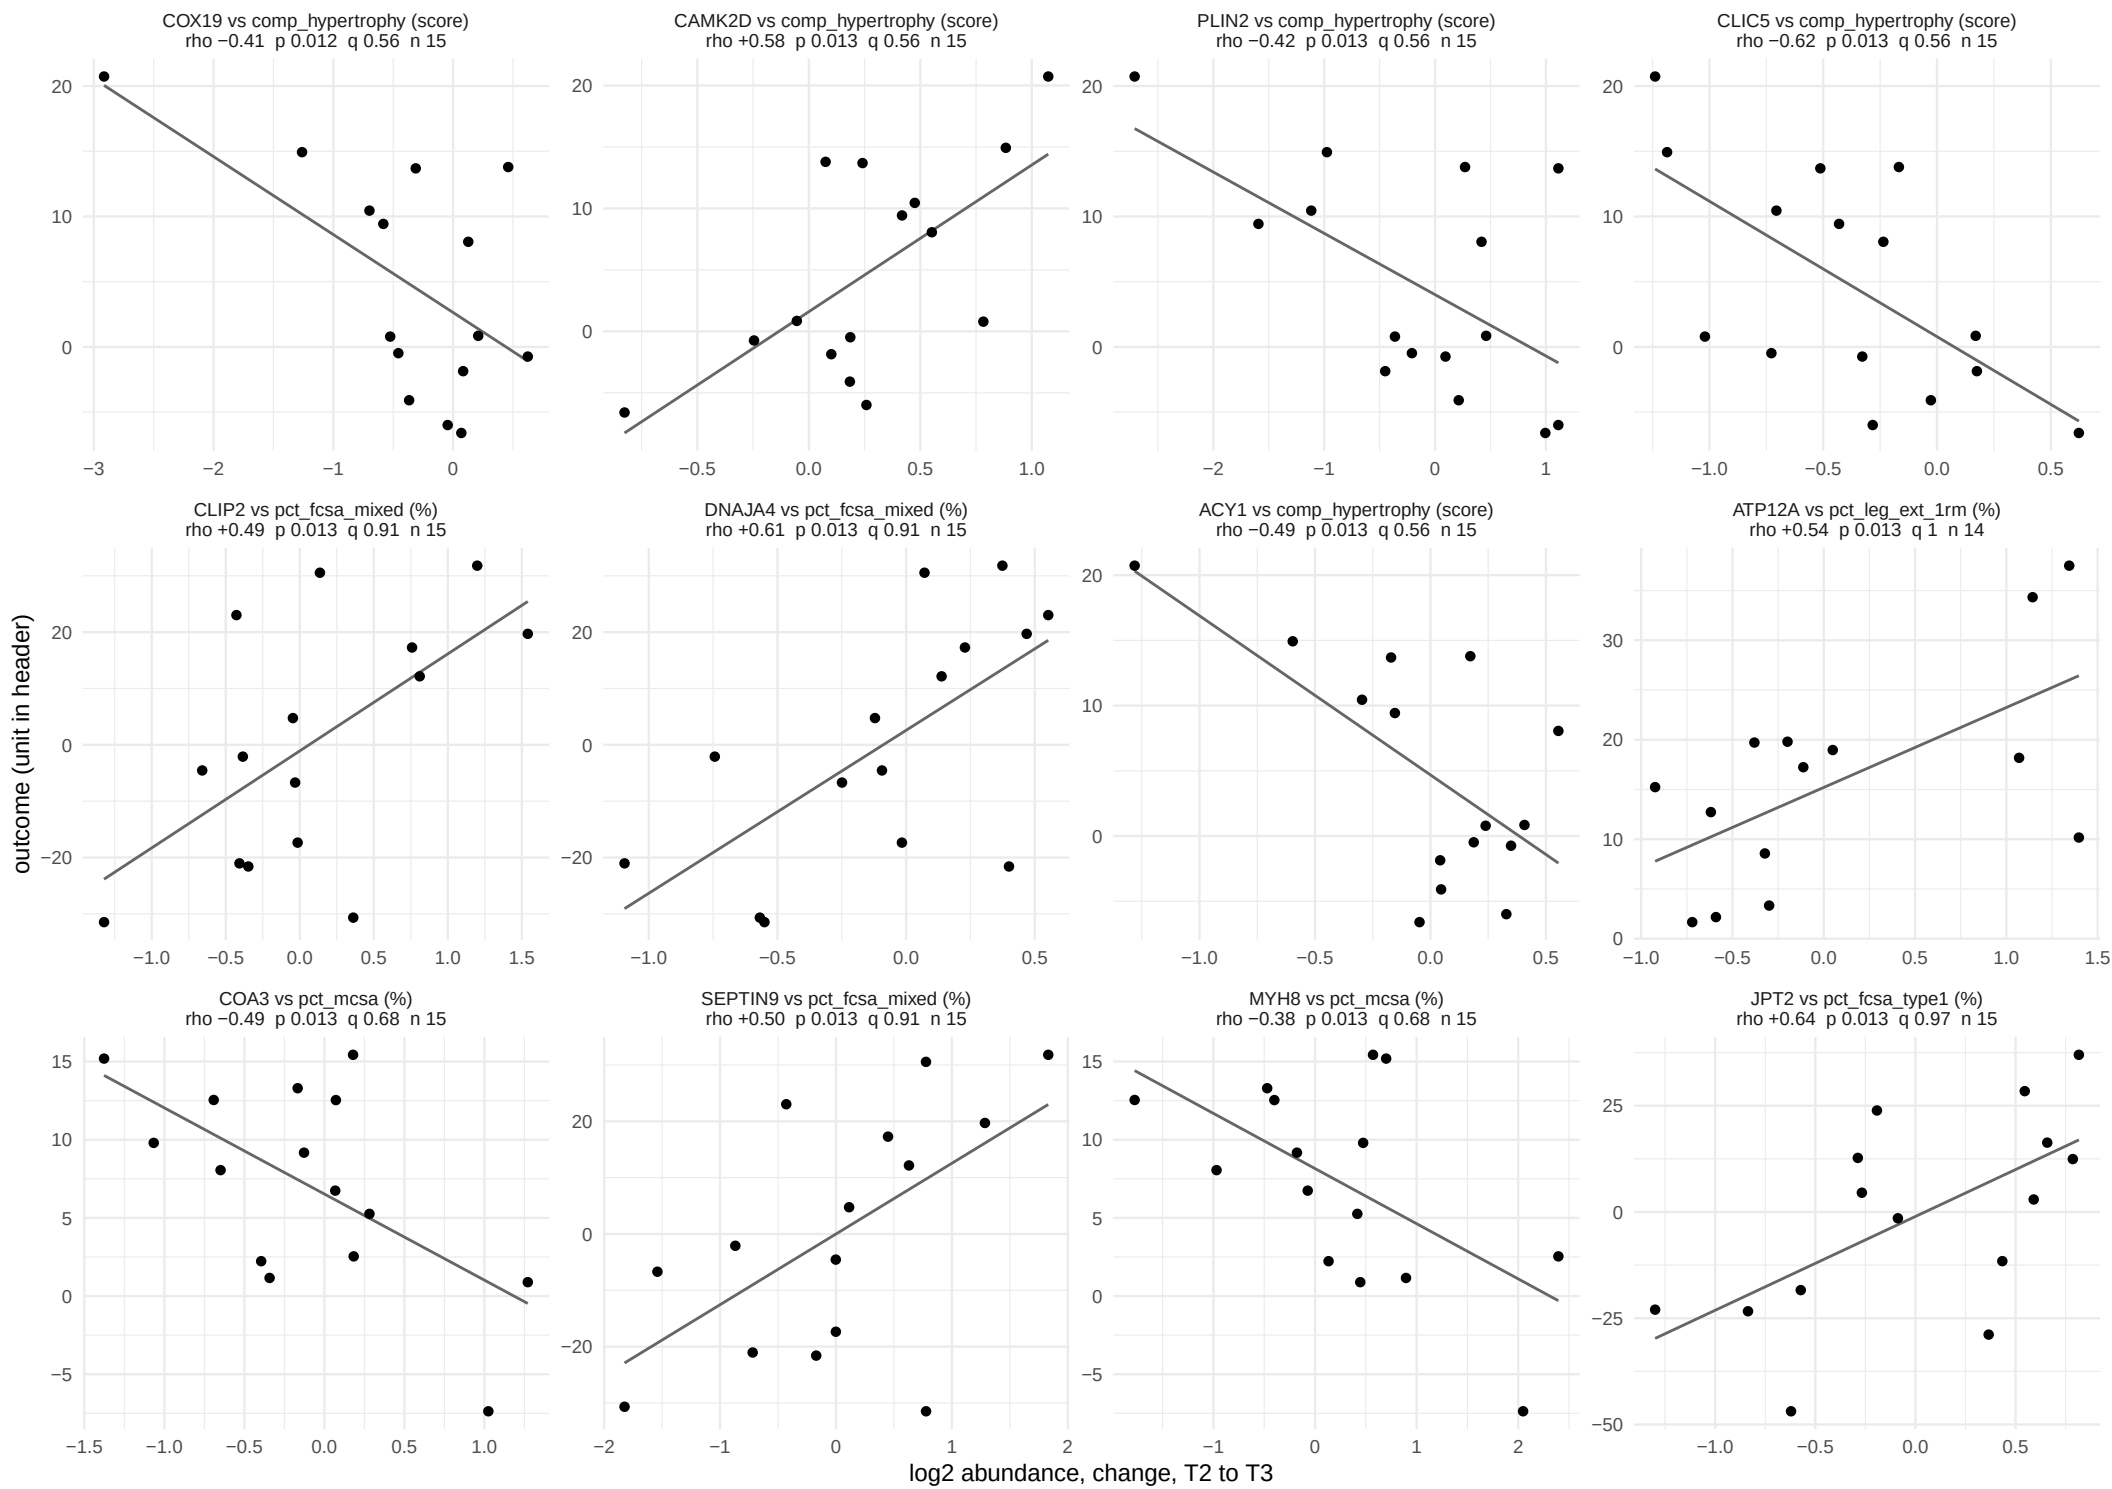

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, acute window


629 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 13 of 53.

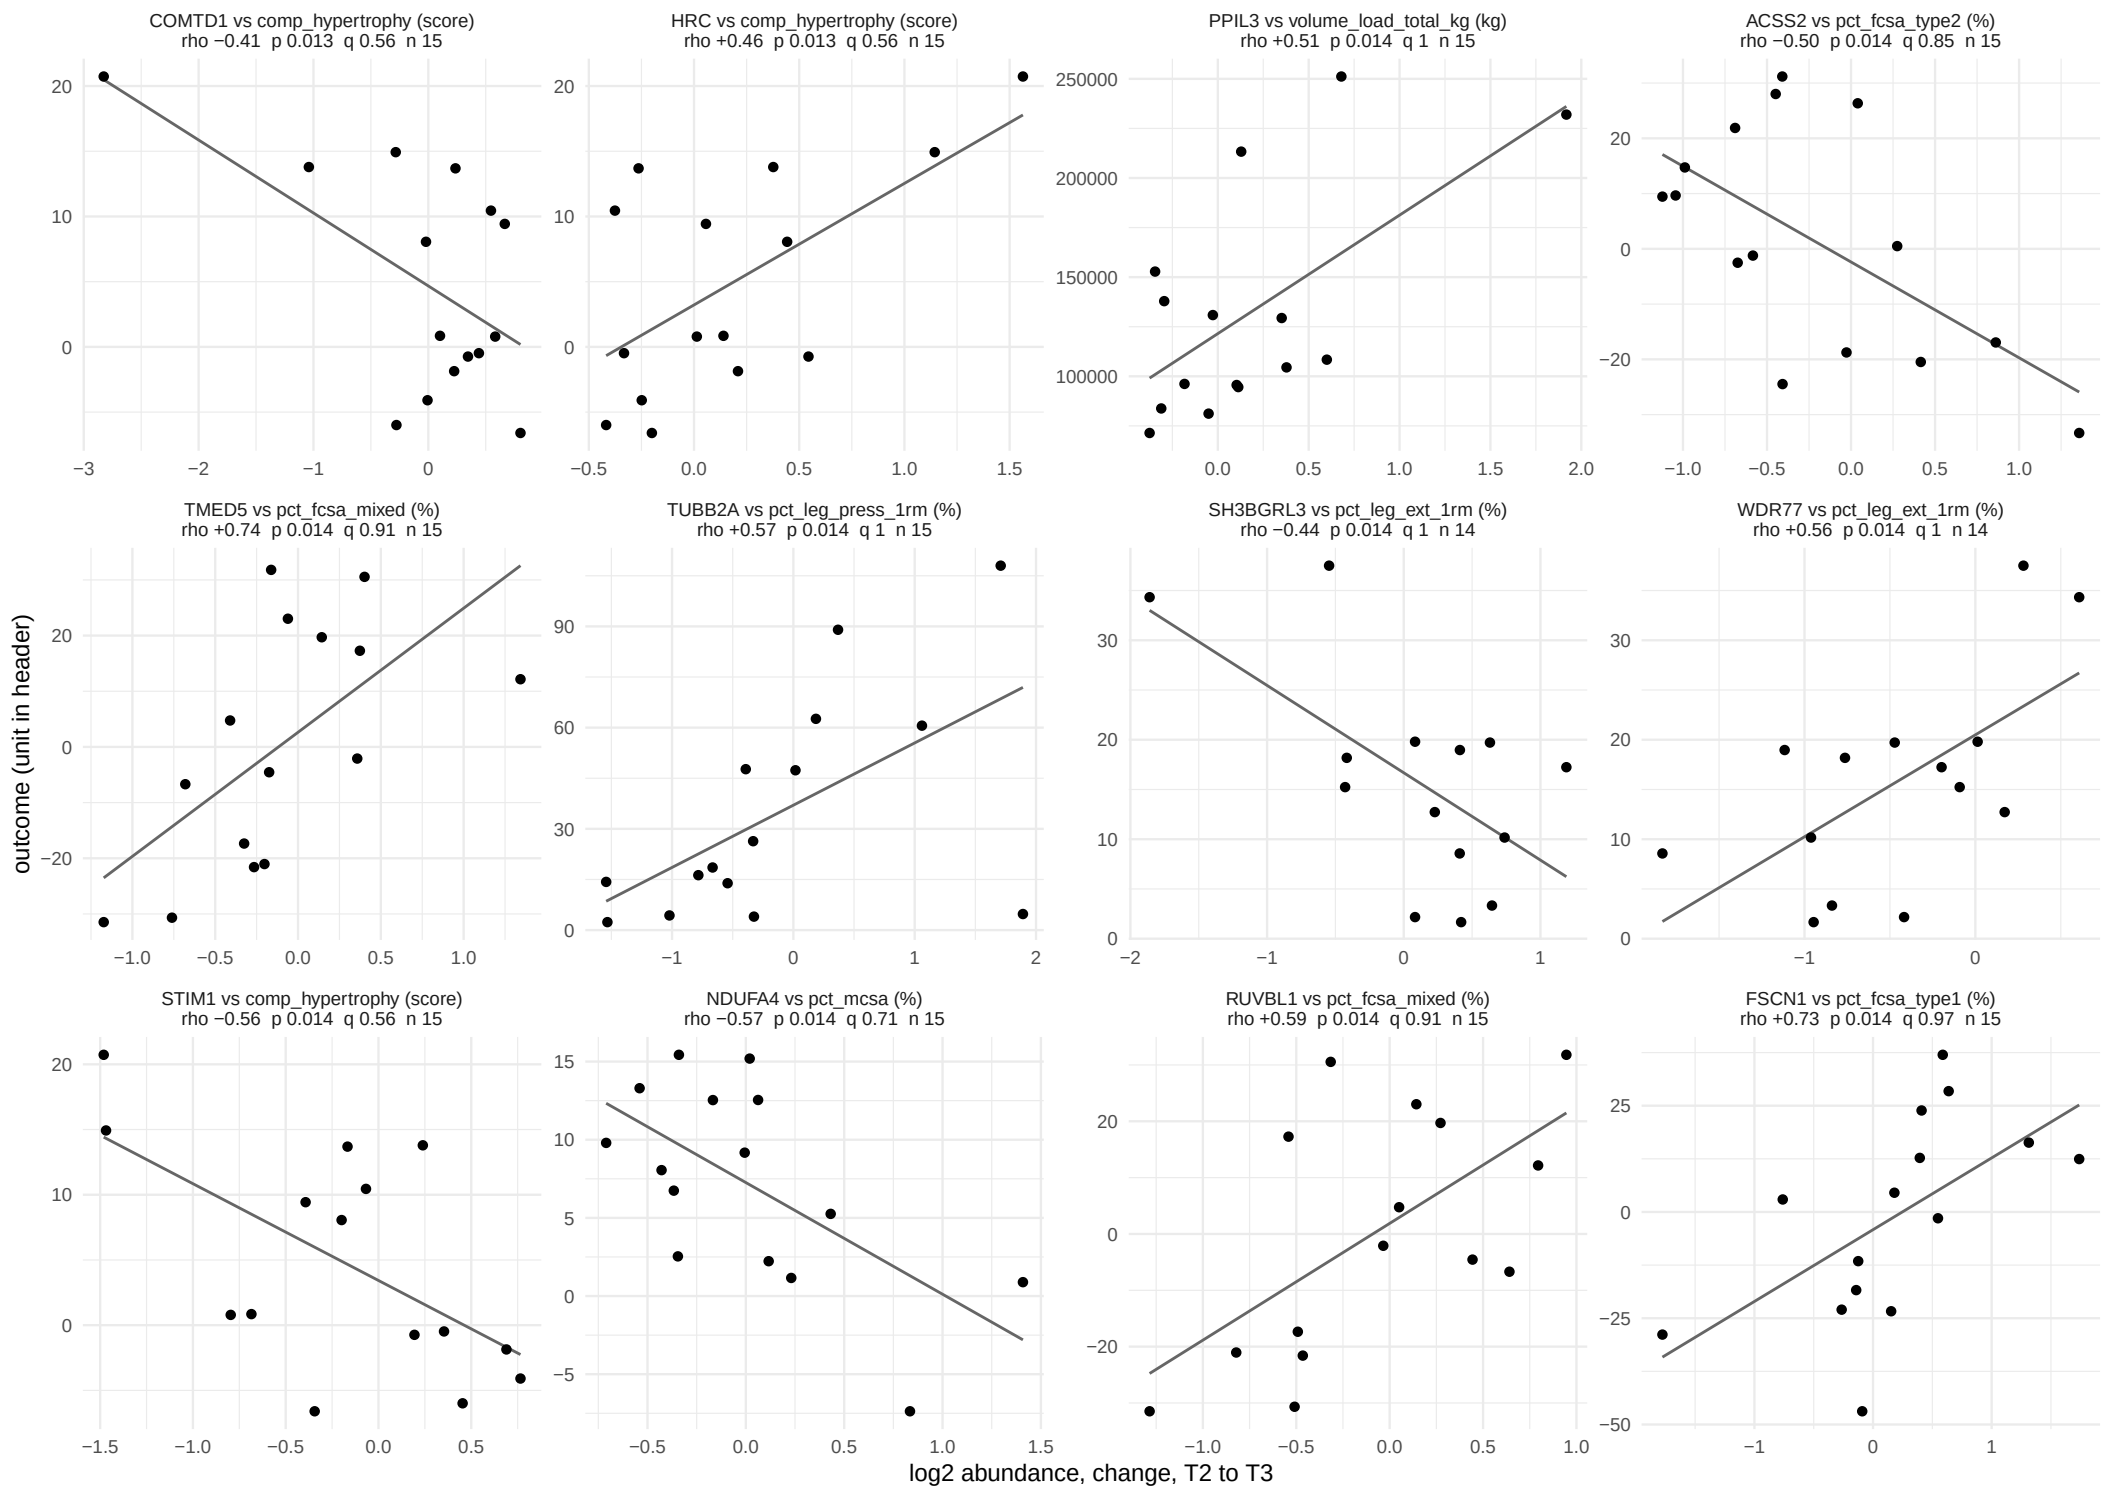

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, acute window


629 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 14 of 53.

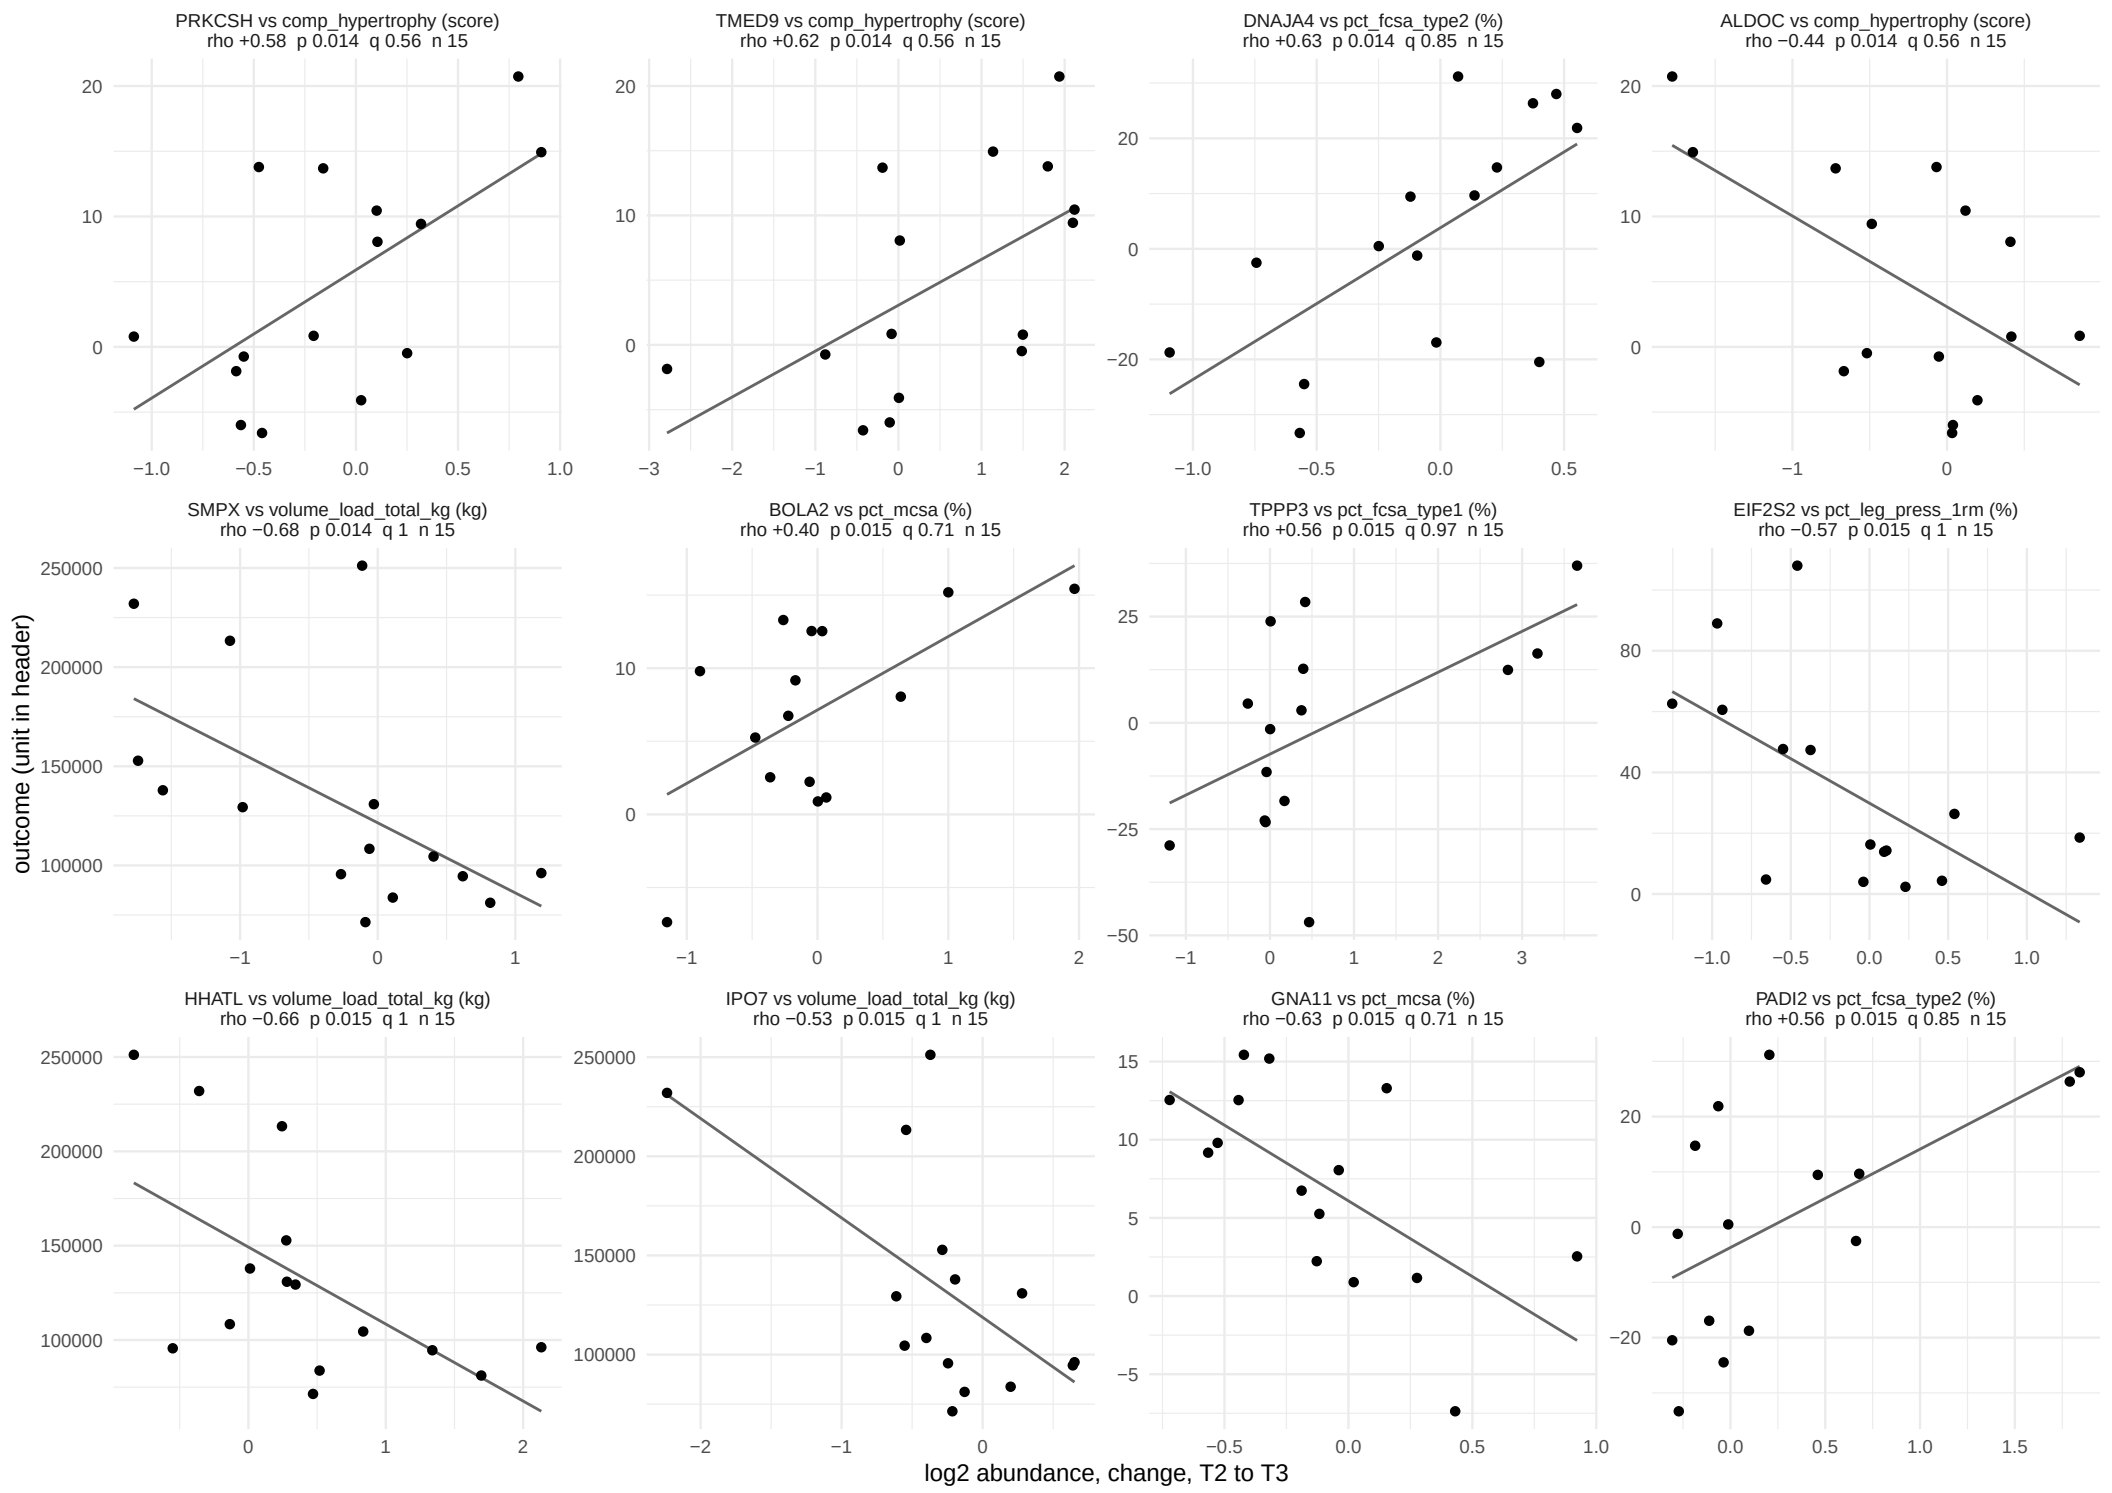

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, acute window


629 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 15 of 53.

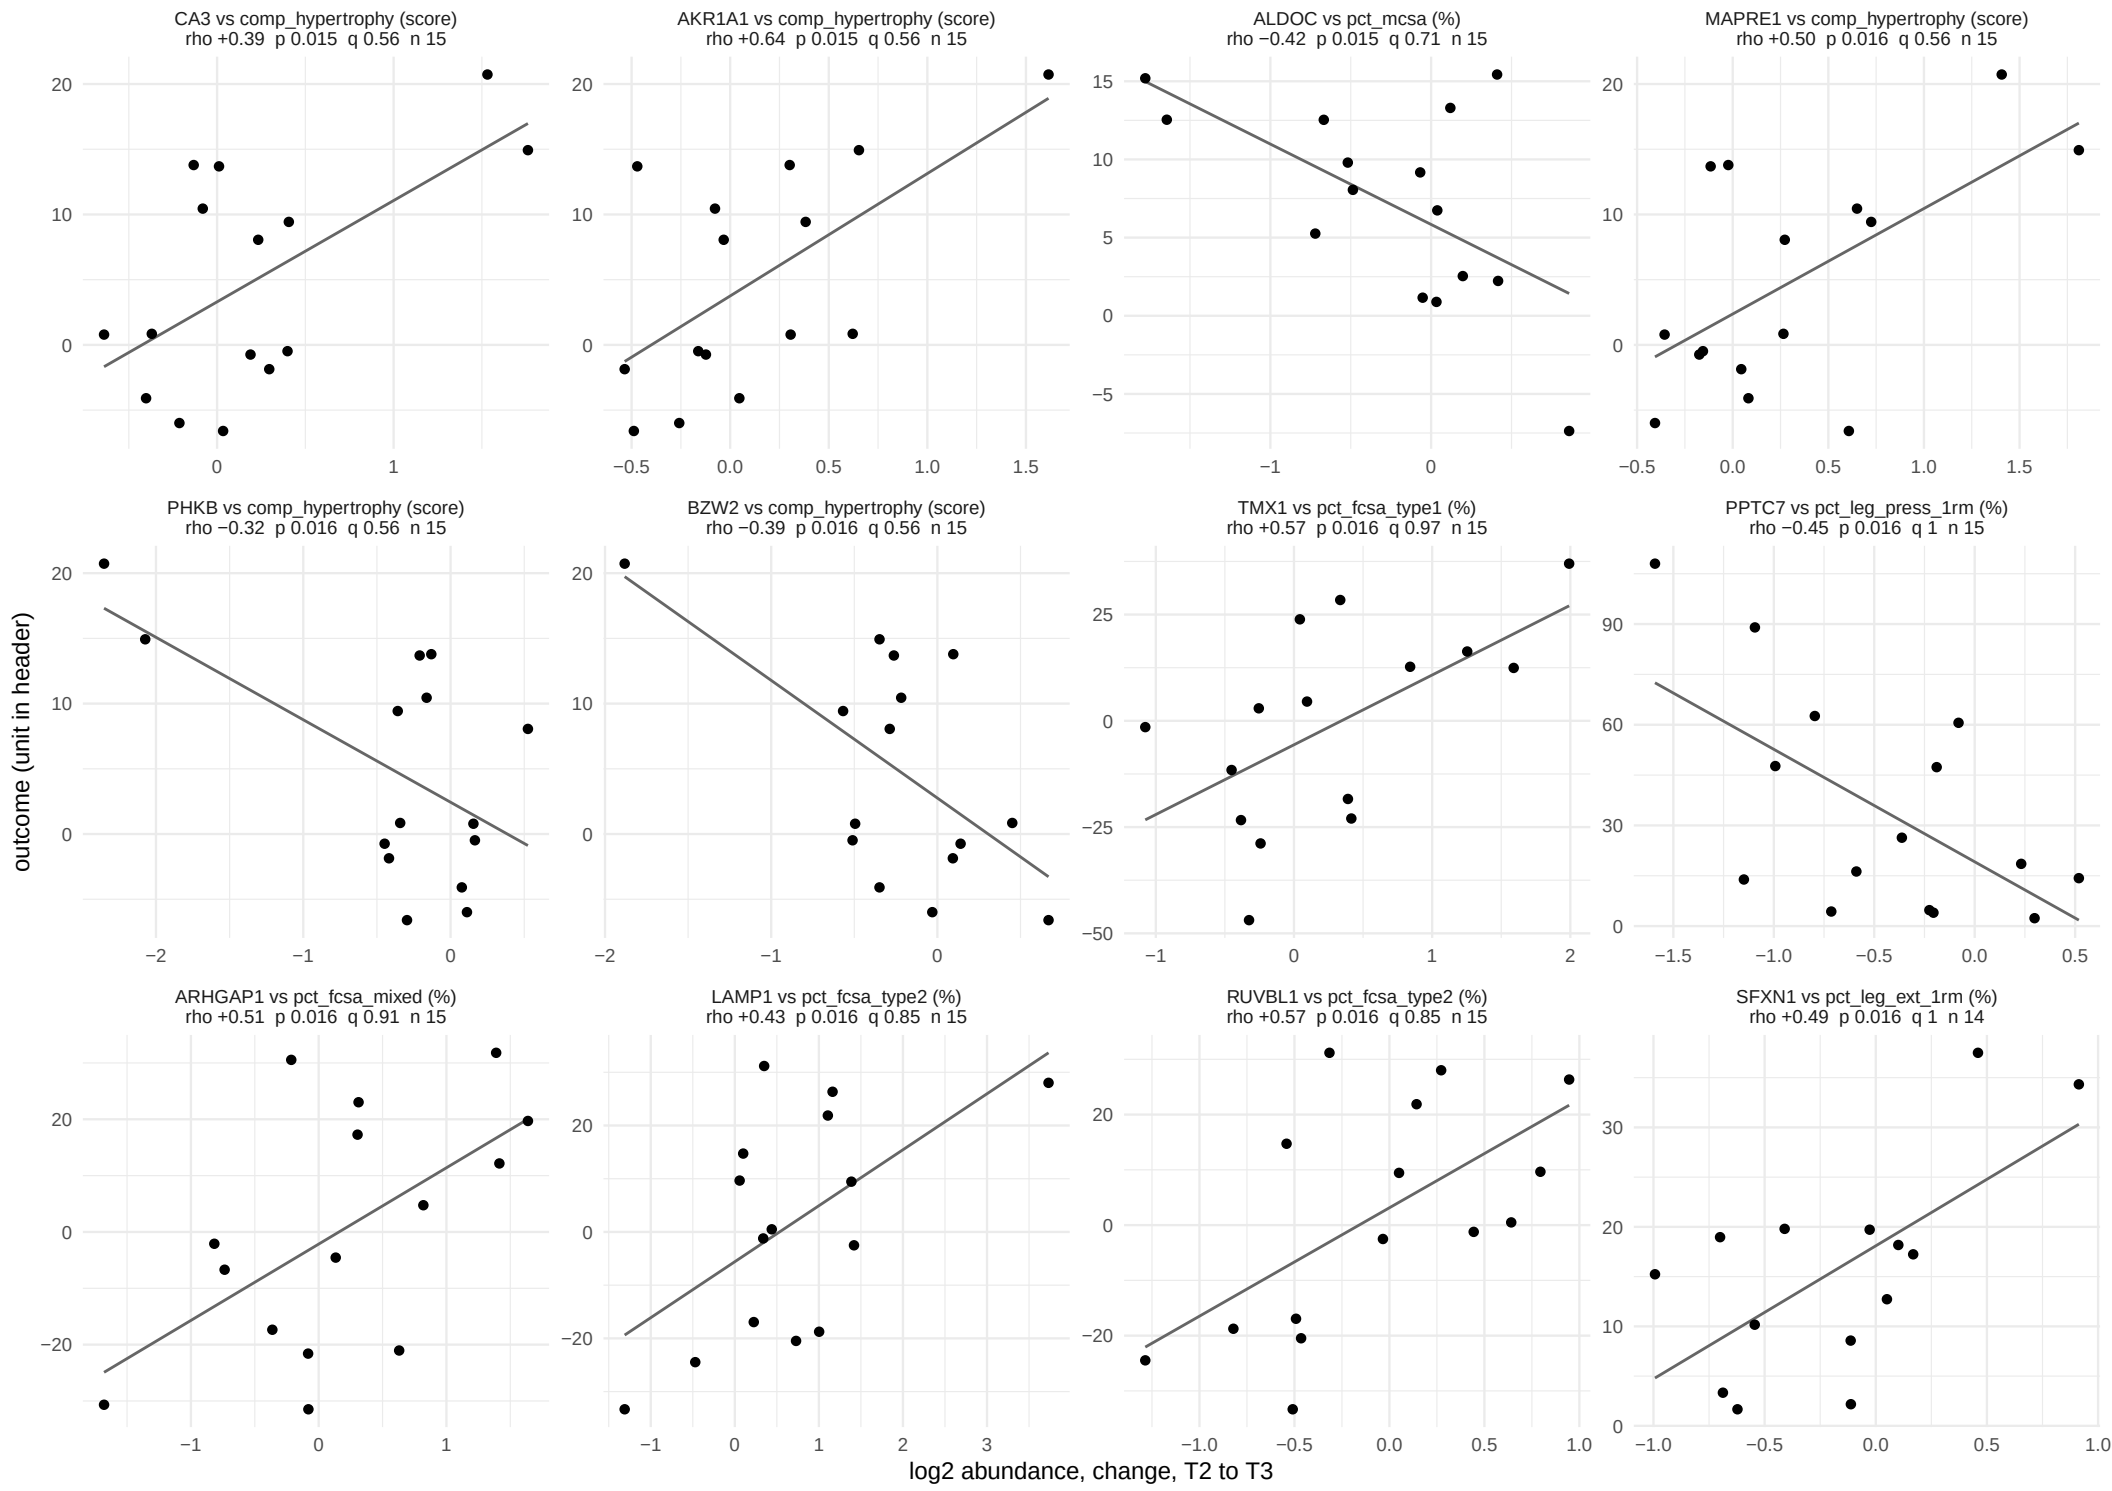

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, acute window


629 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 16 of 53.

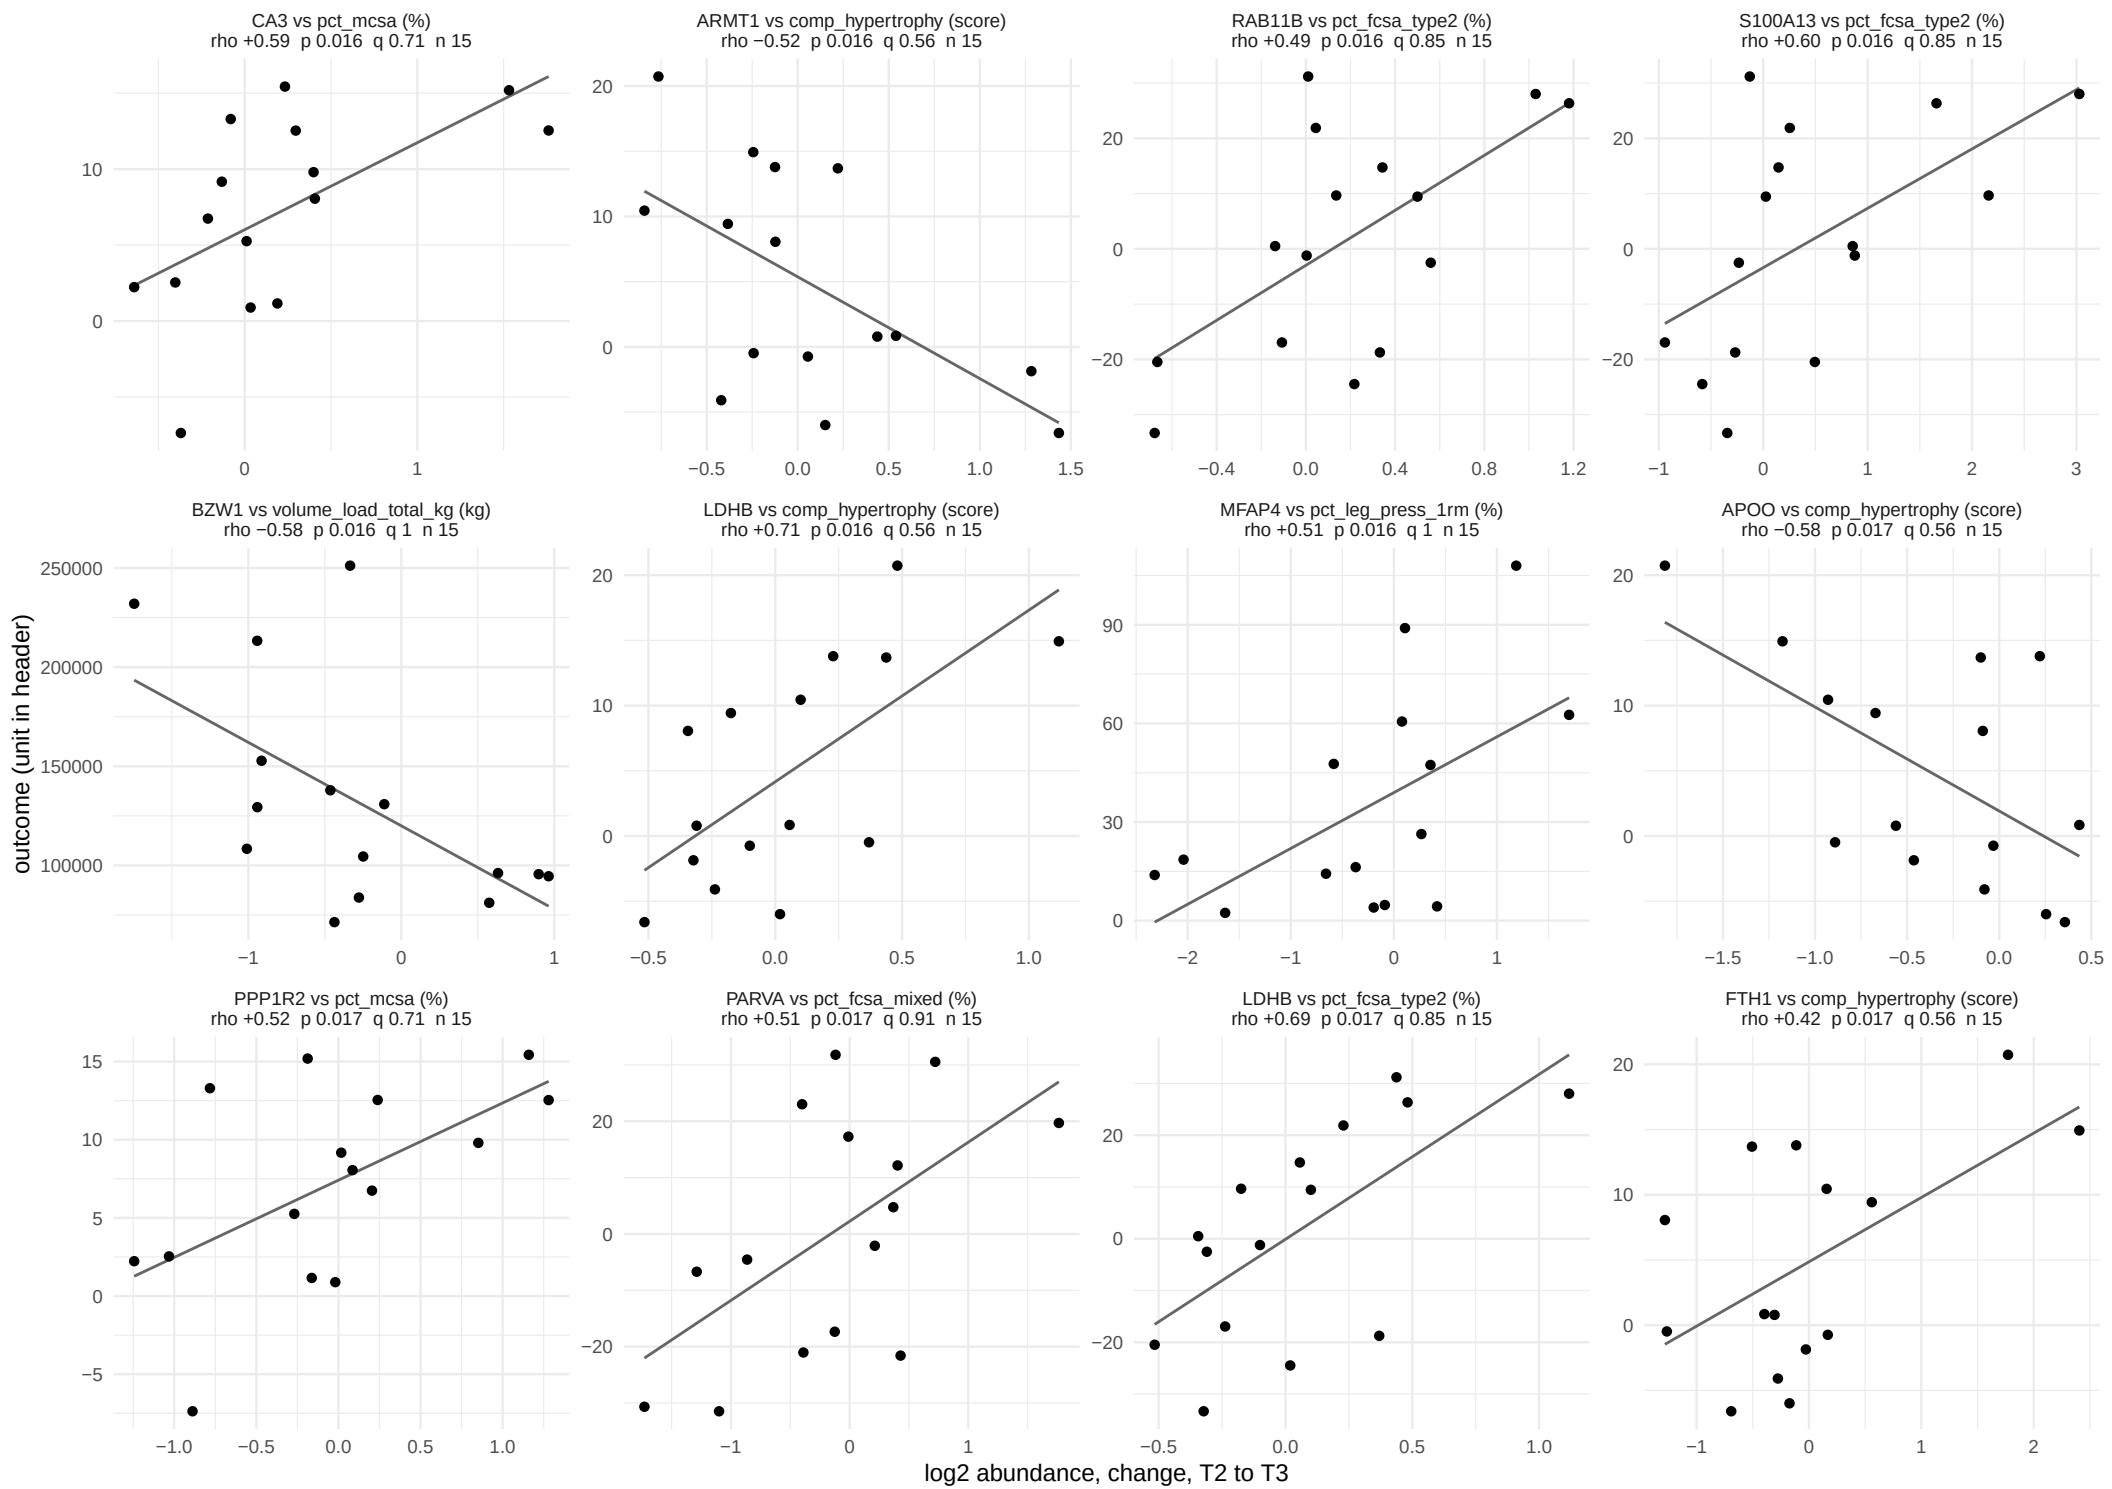

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, acute window


629 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 17 of 53.

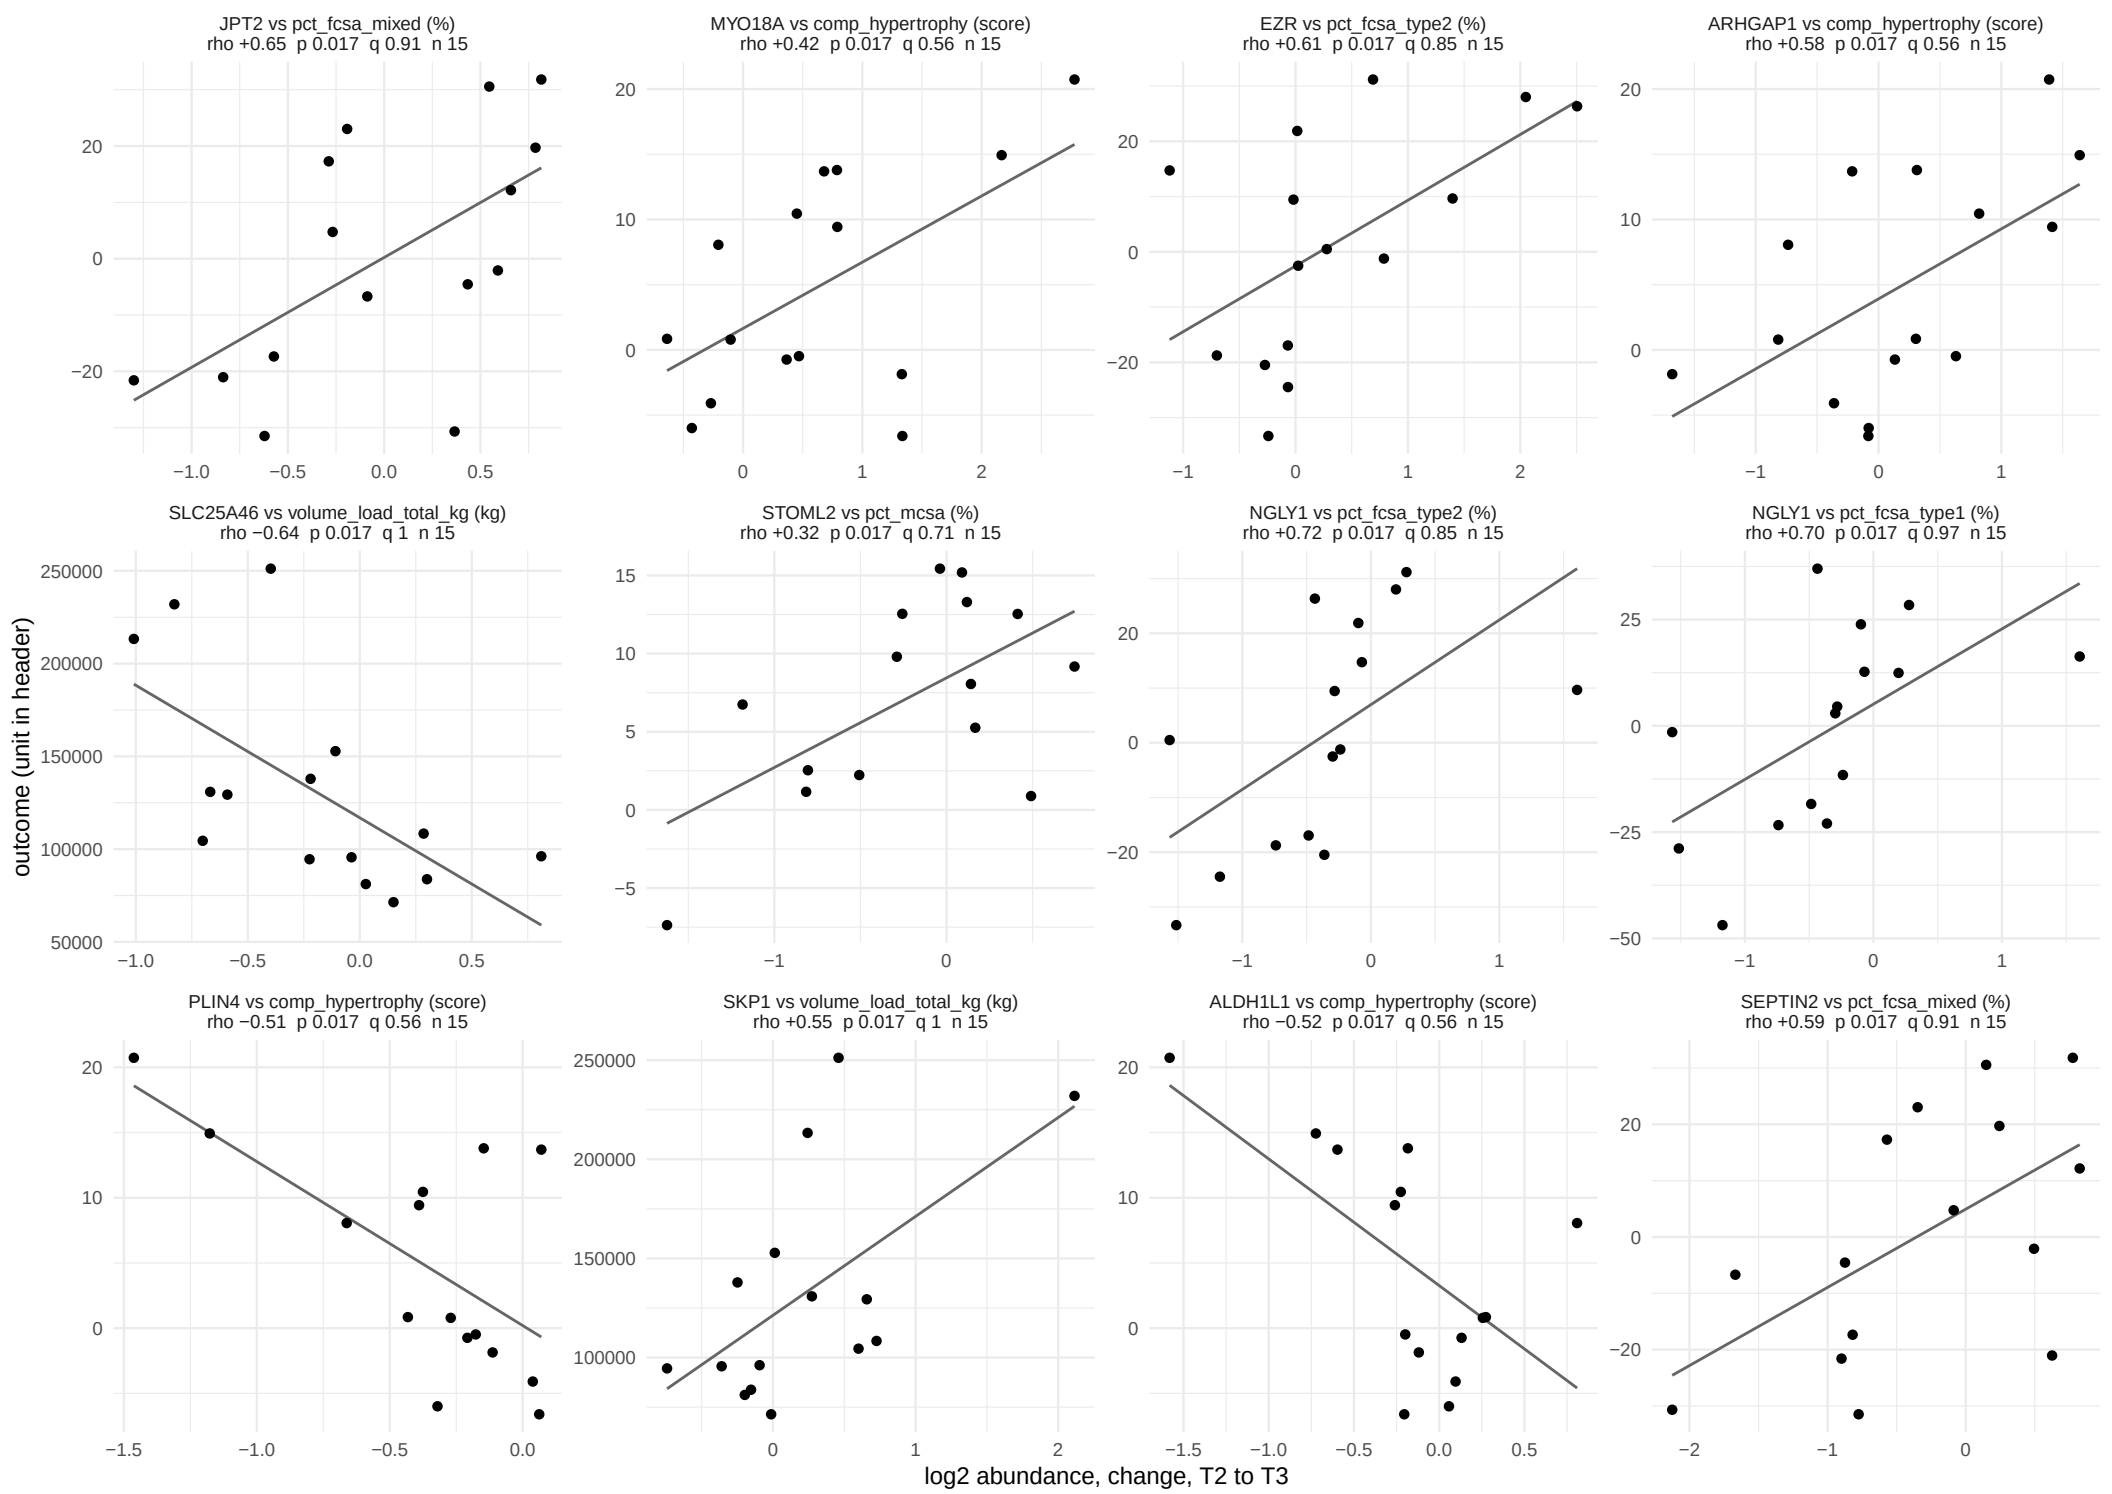

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, acute window


629 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 18 of 53.

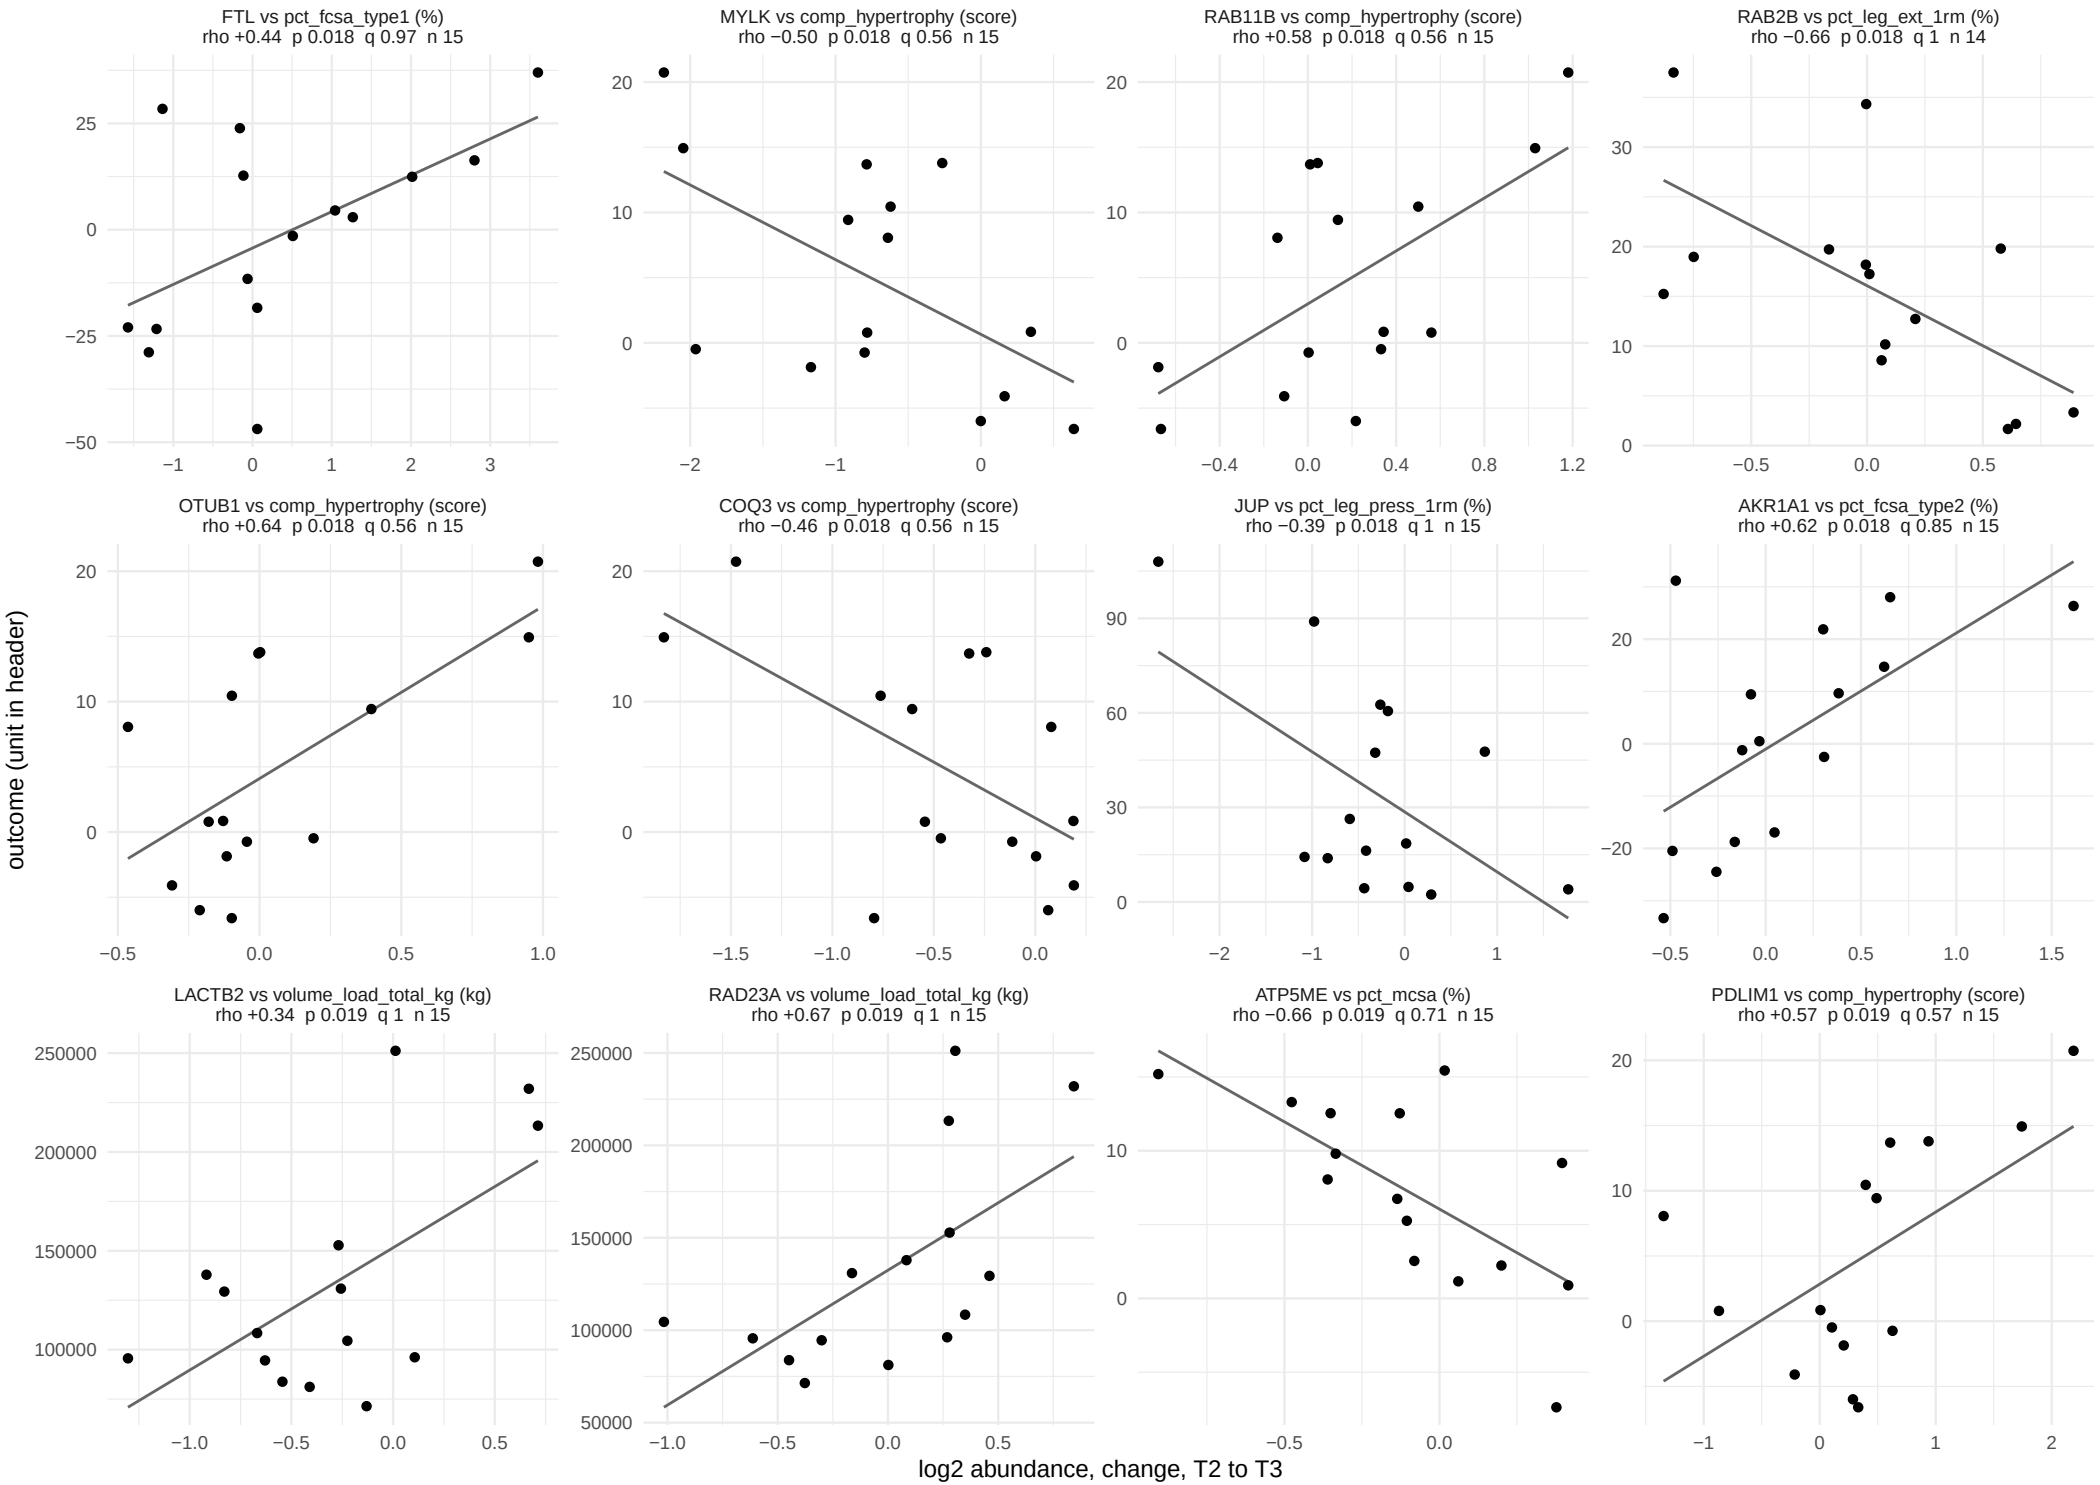

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, acute window


629 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 19 of 53.

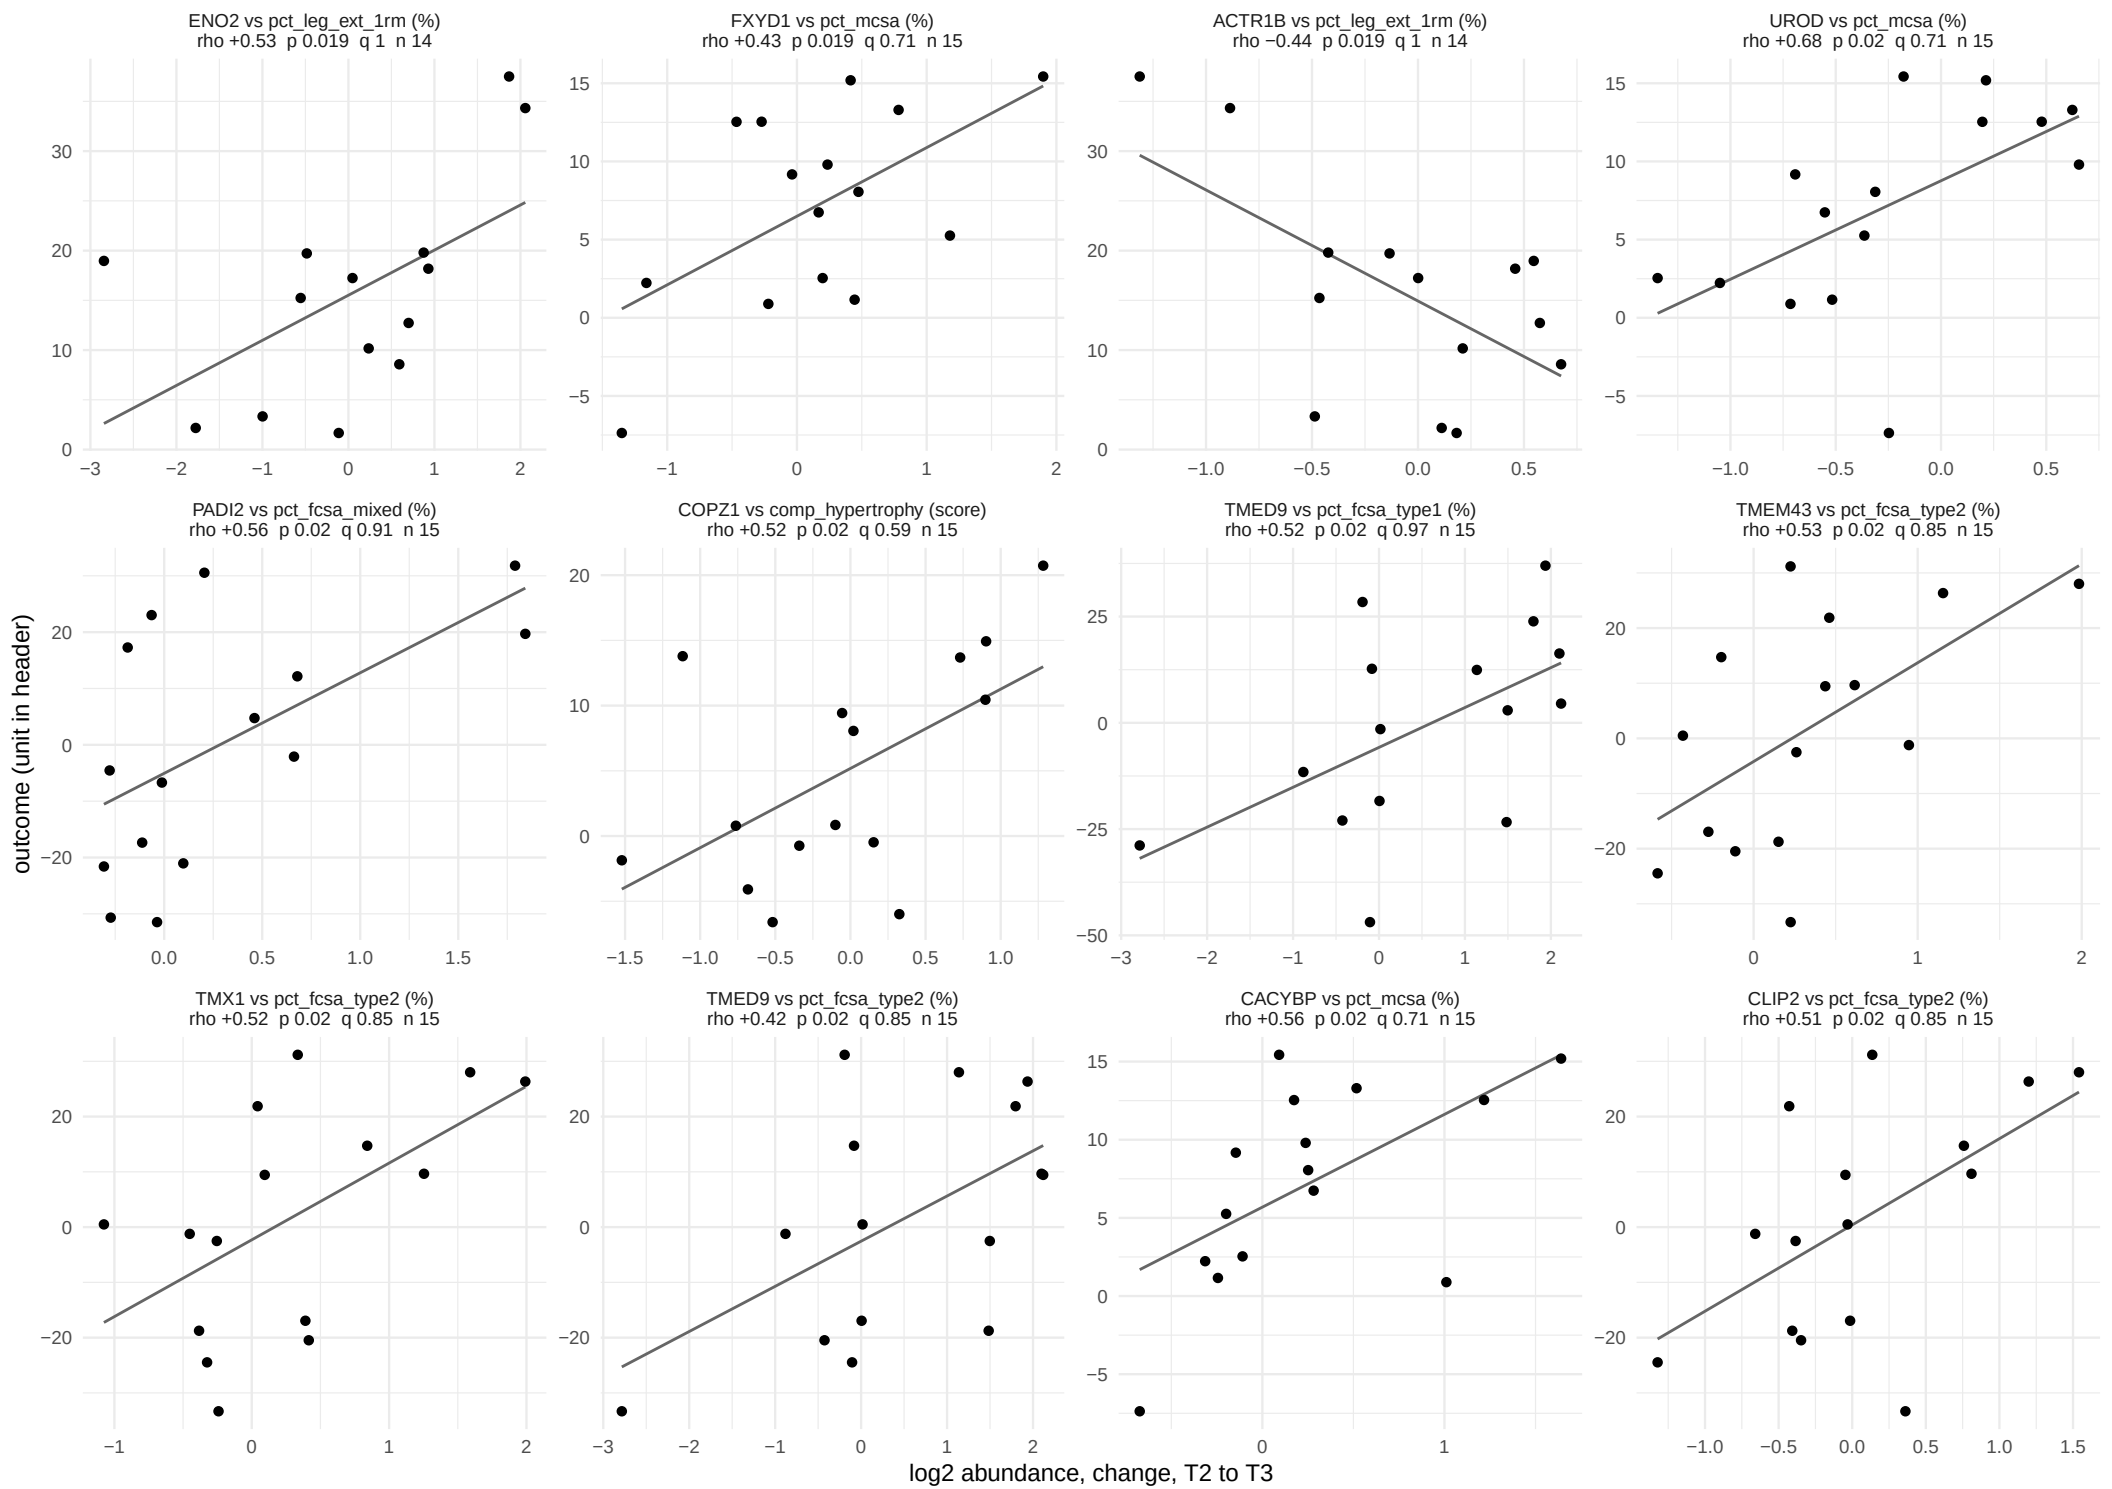

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, acute window


629 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 20 of 53.

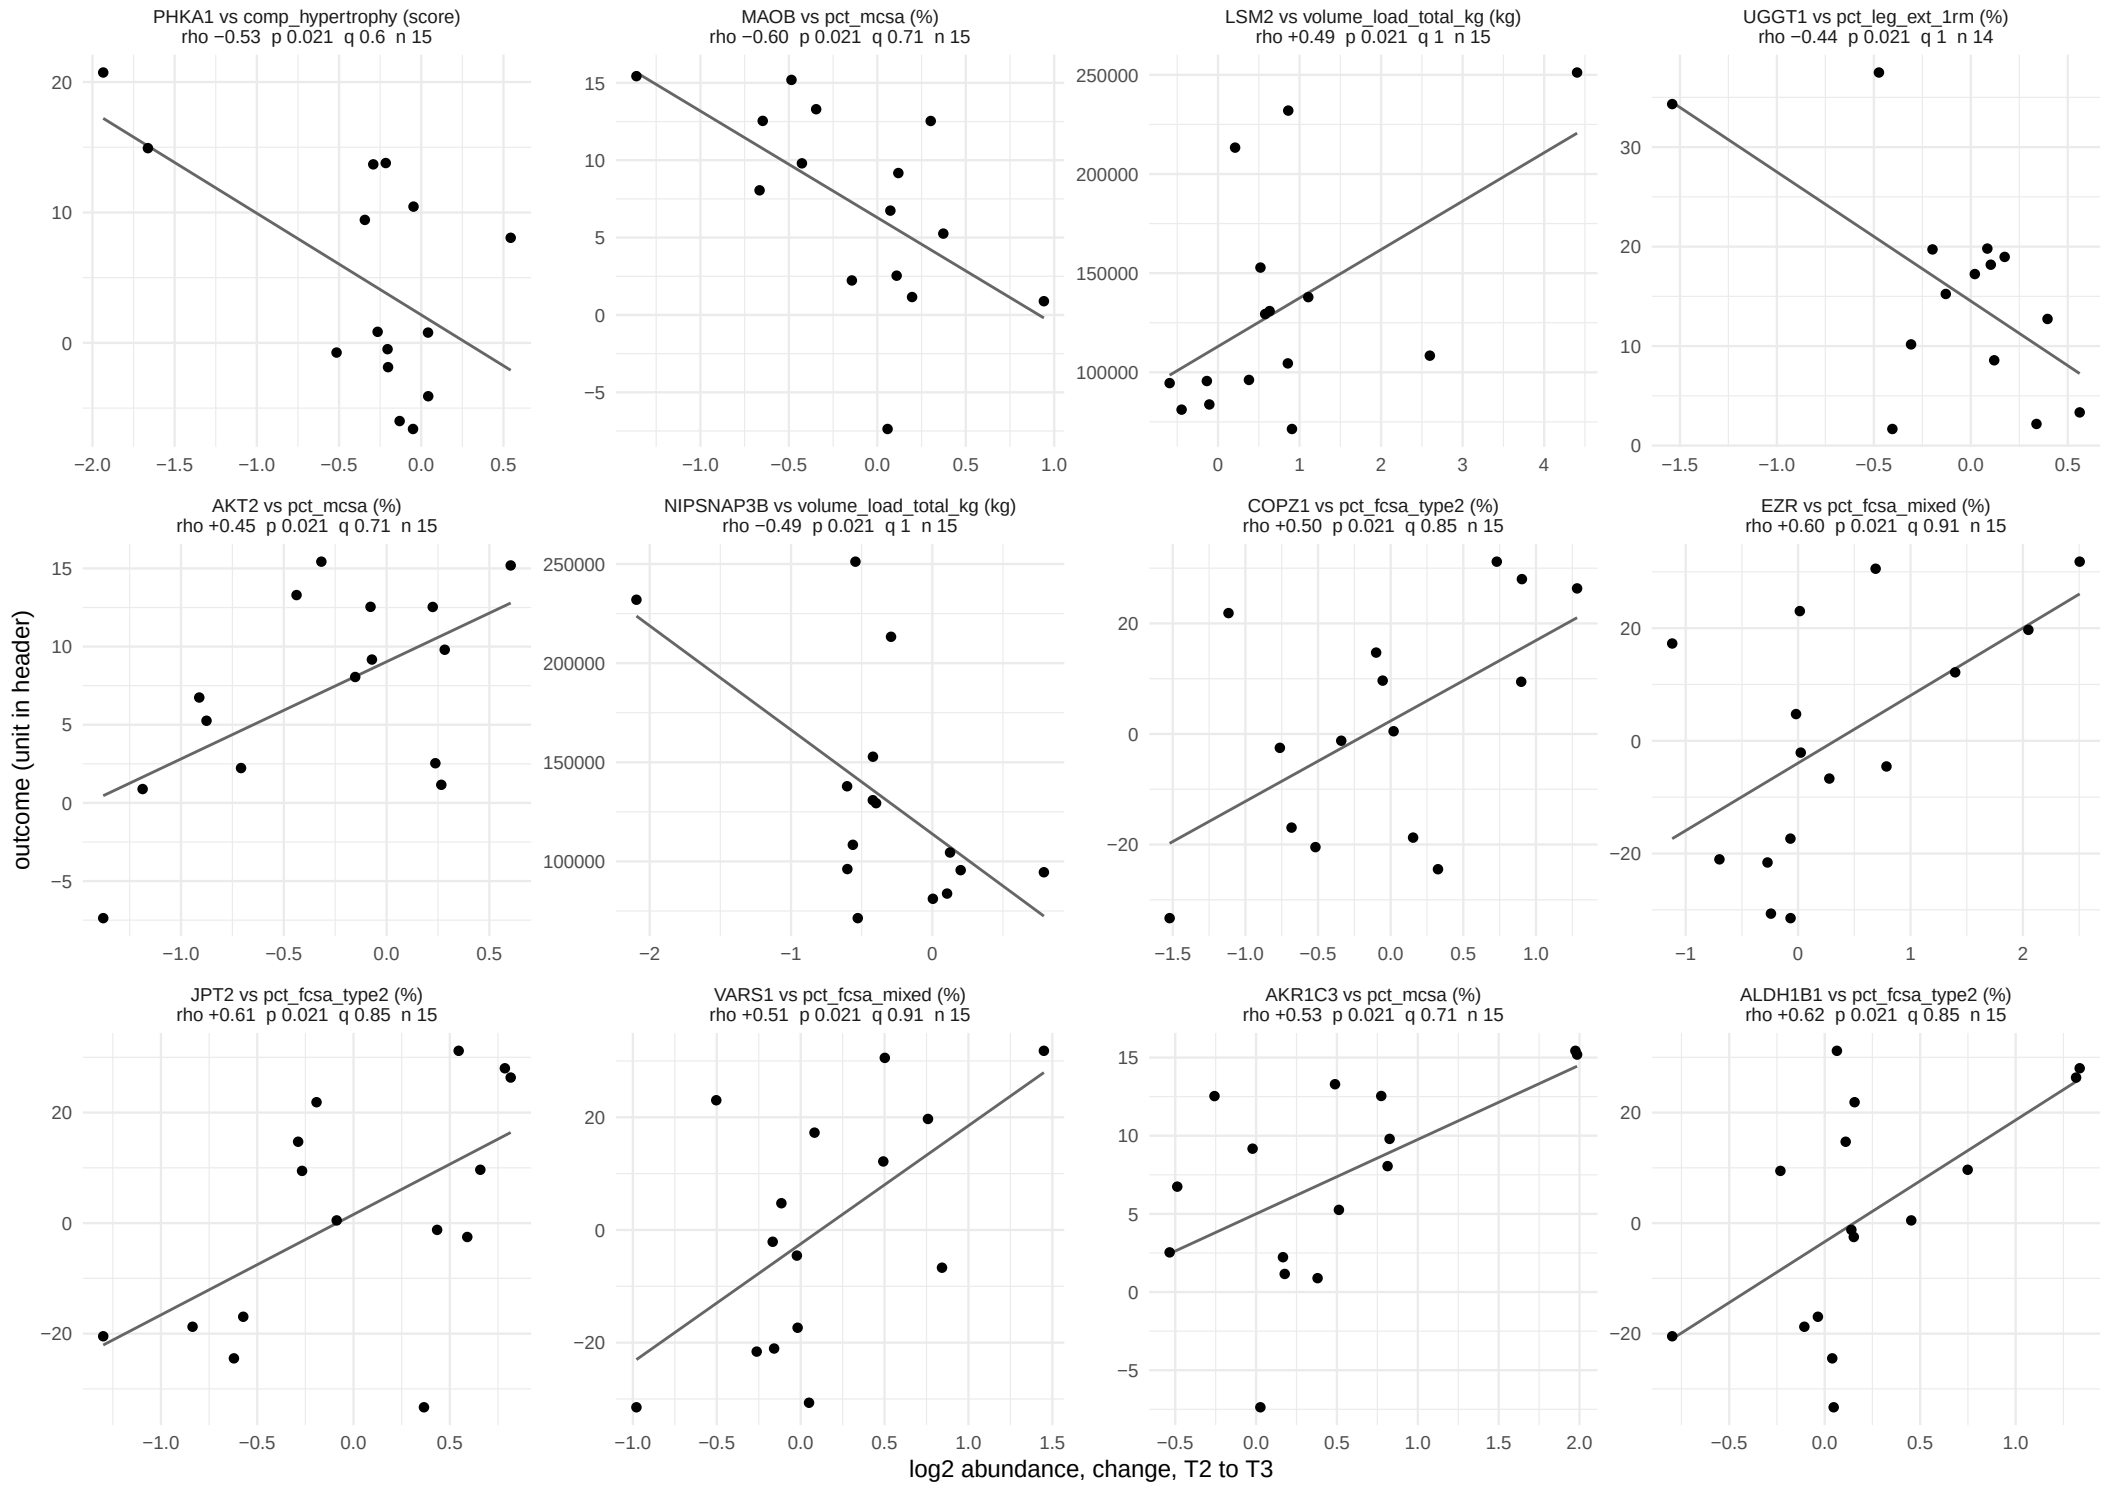

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, acute window


629 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 21 of 53.

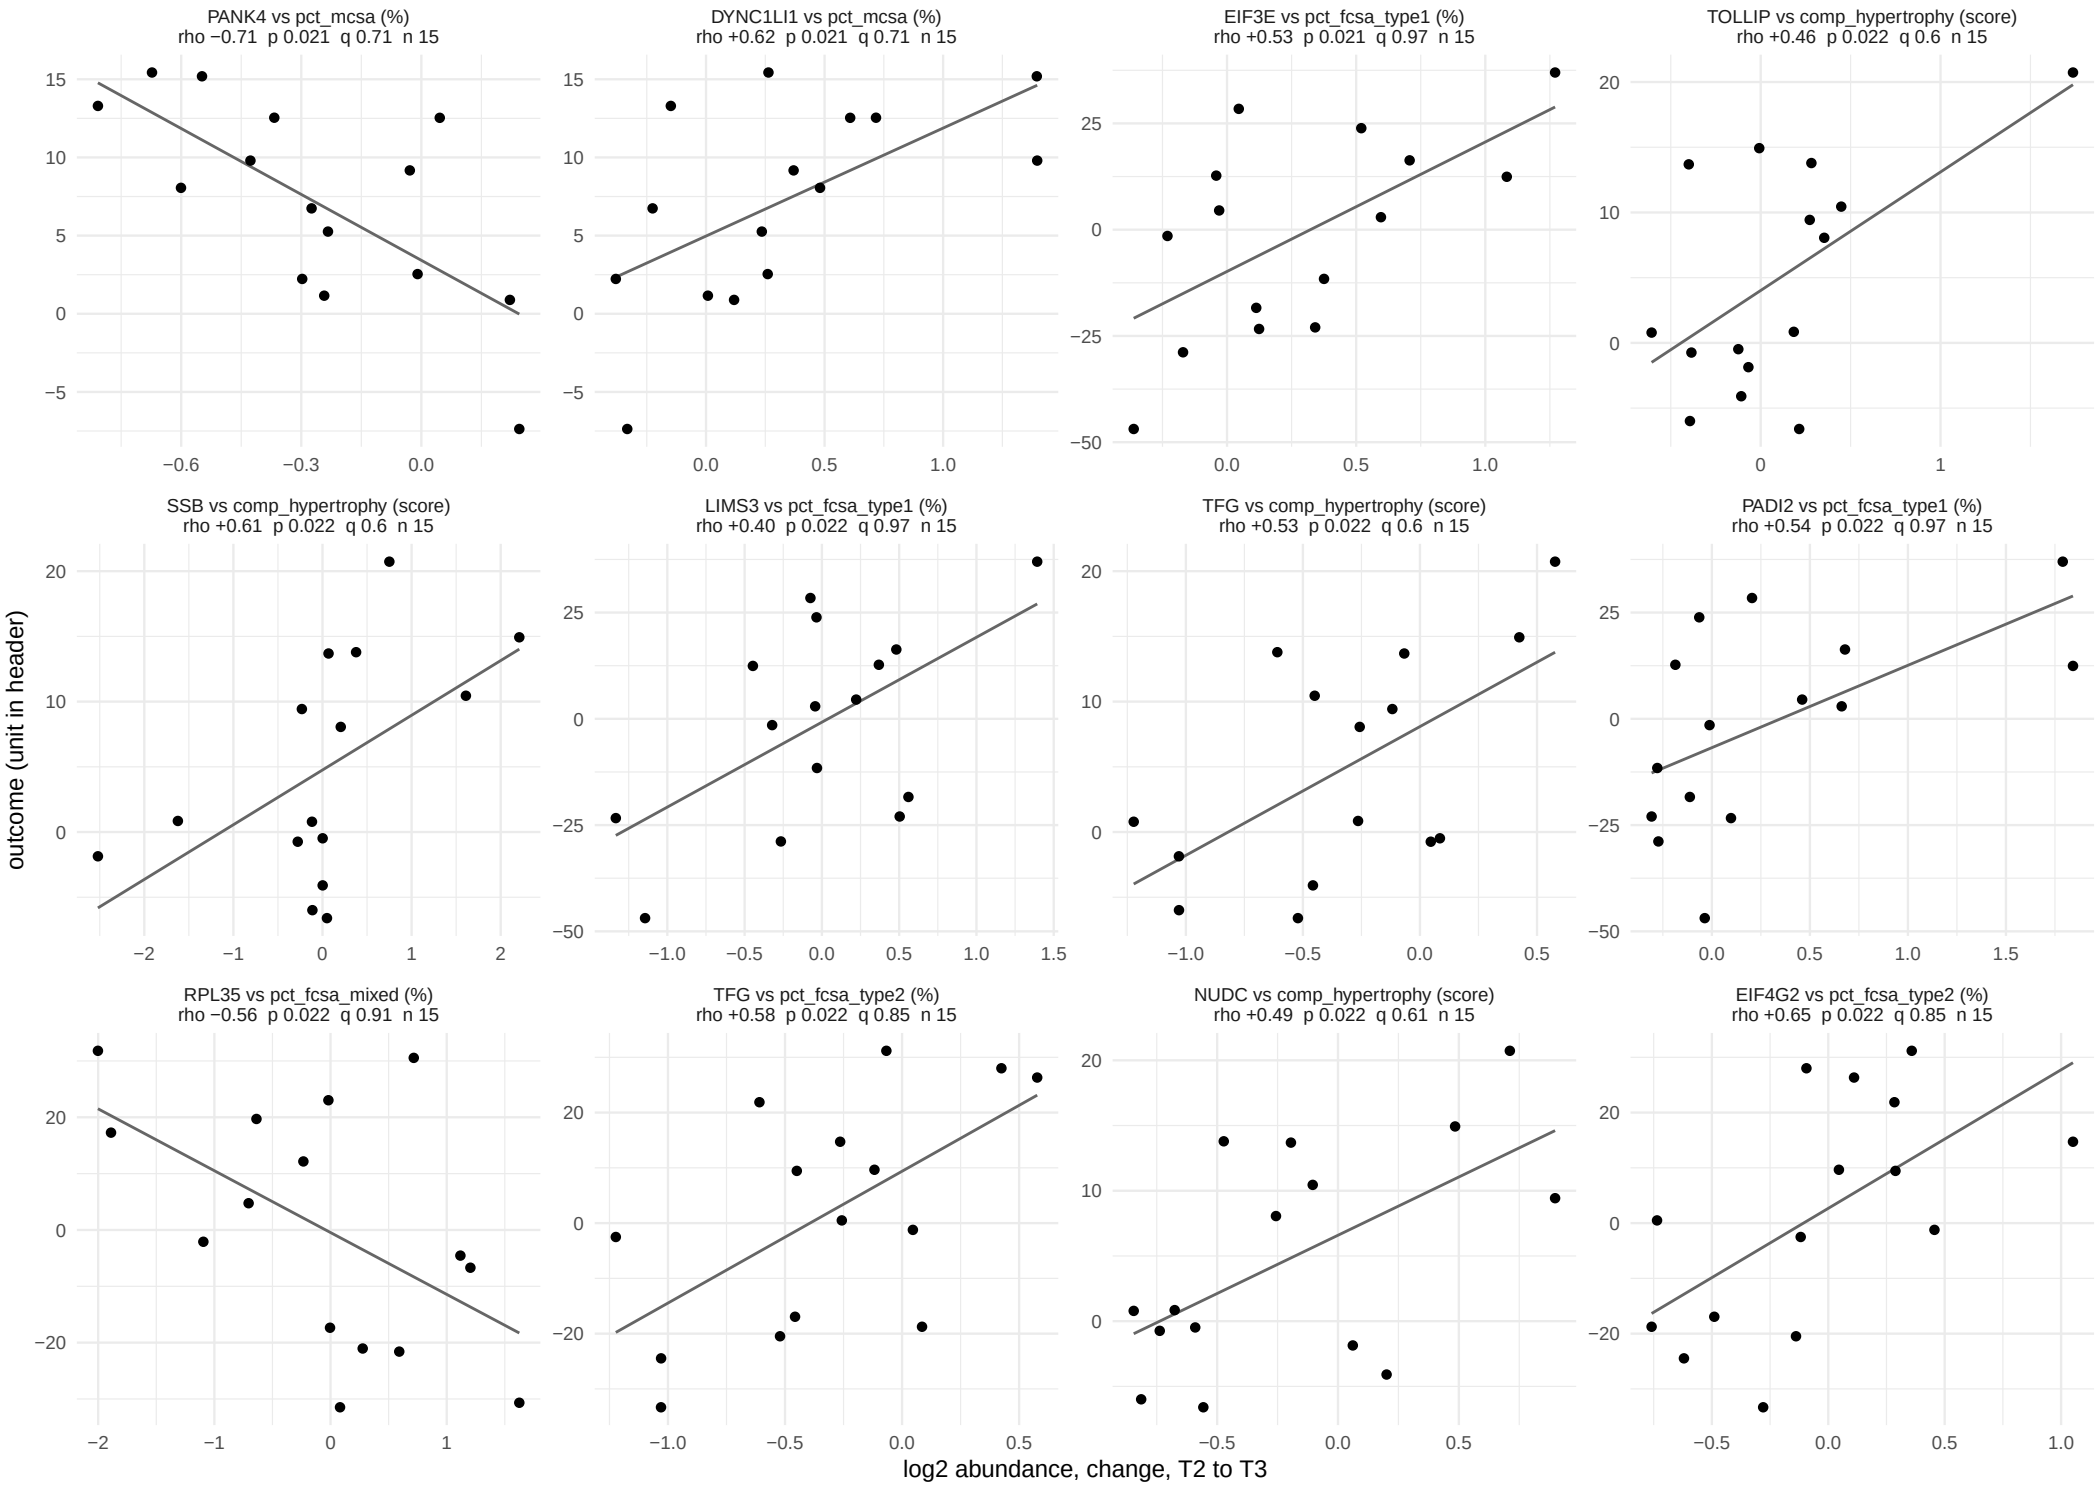

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, acute window


629 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 22 of 53.

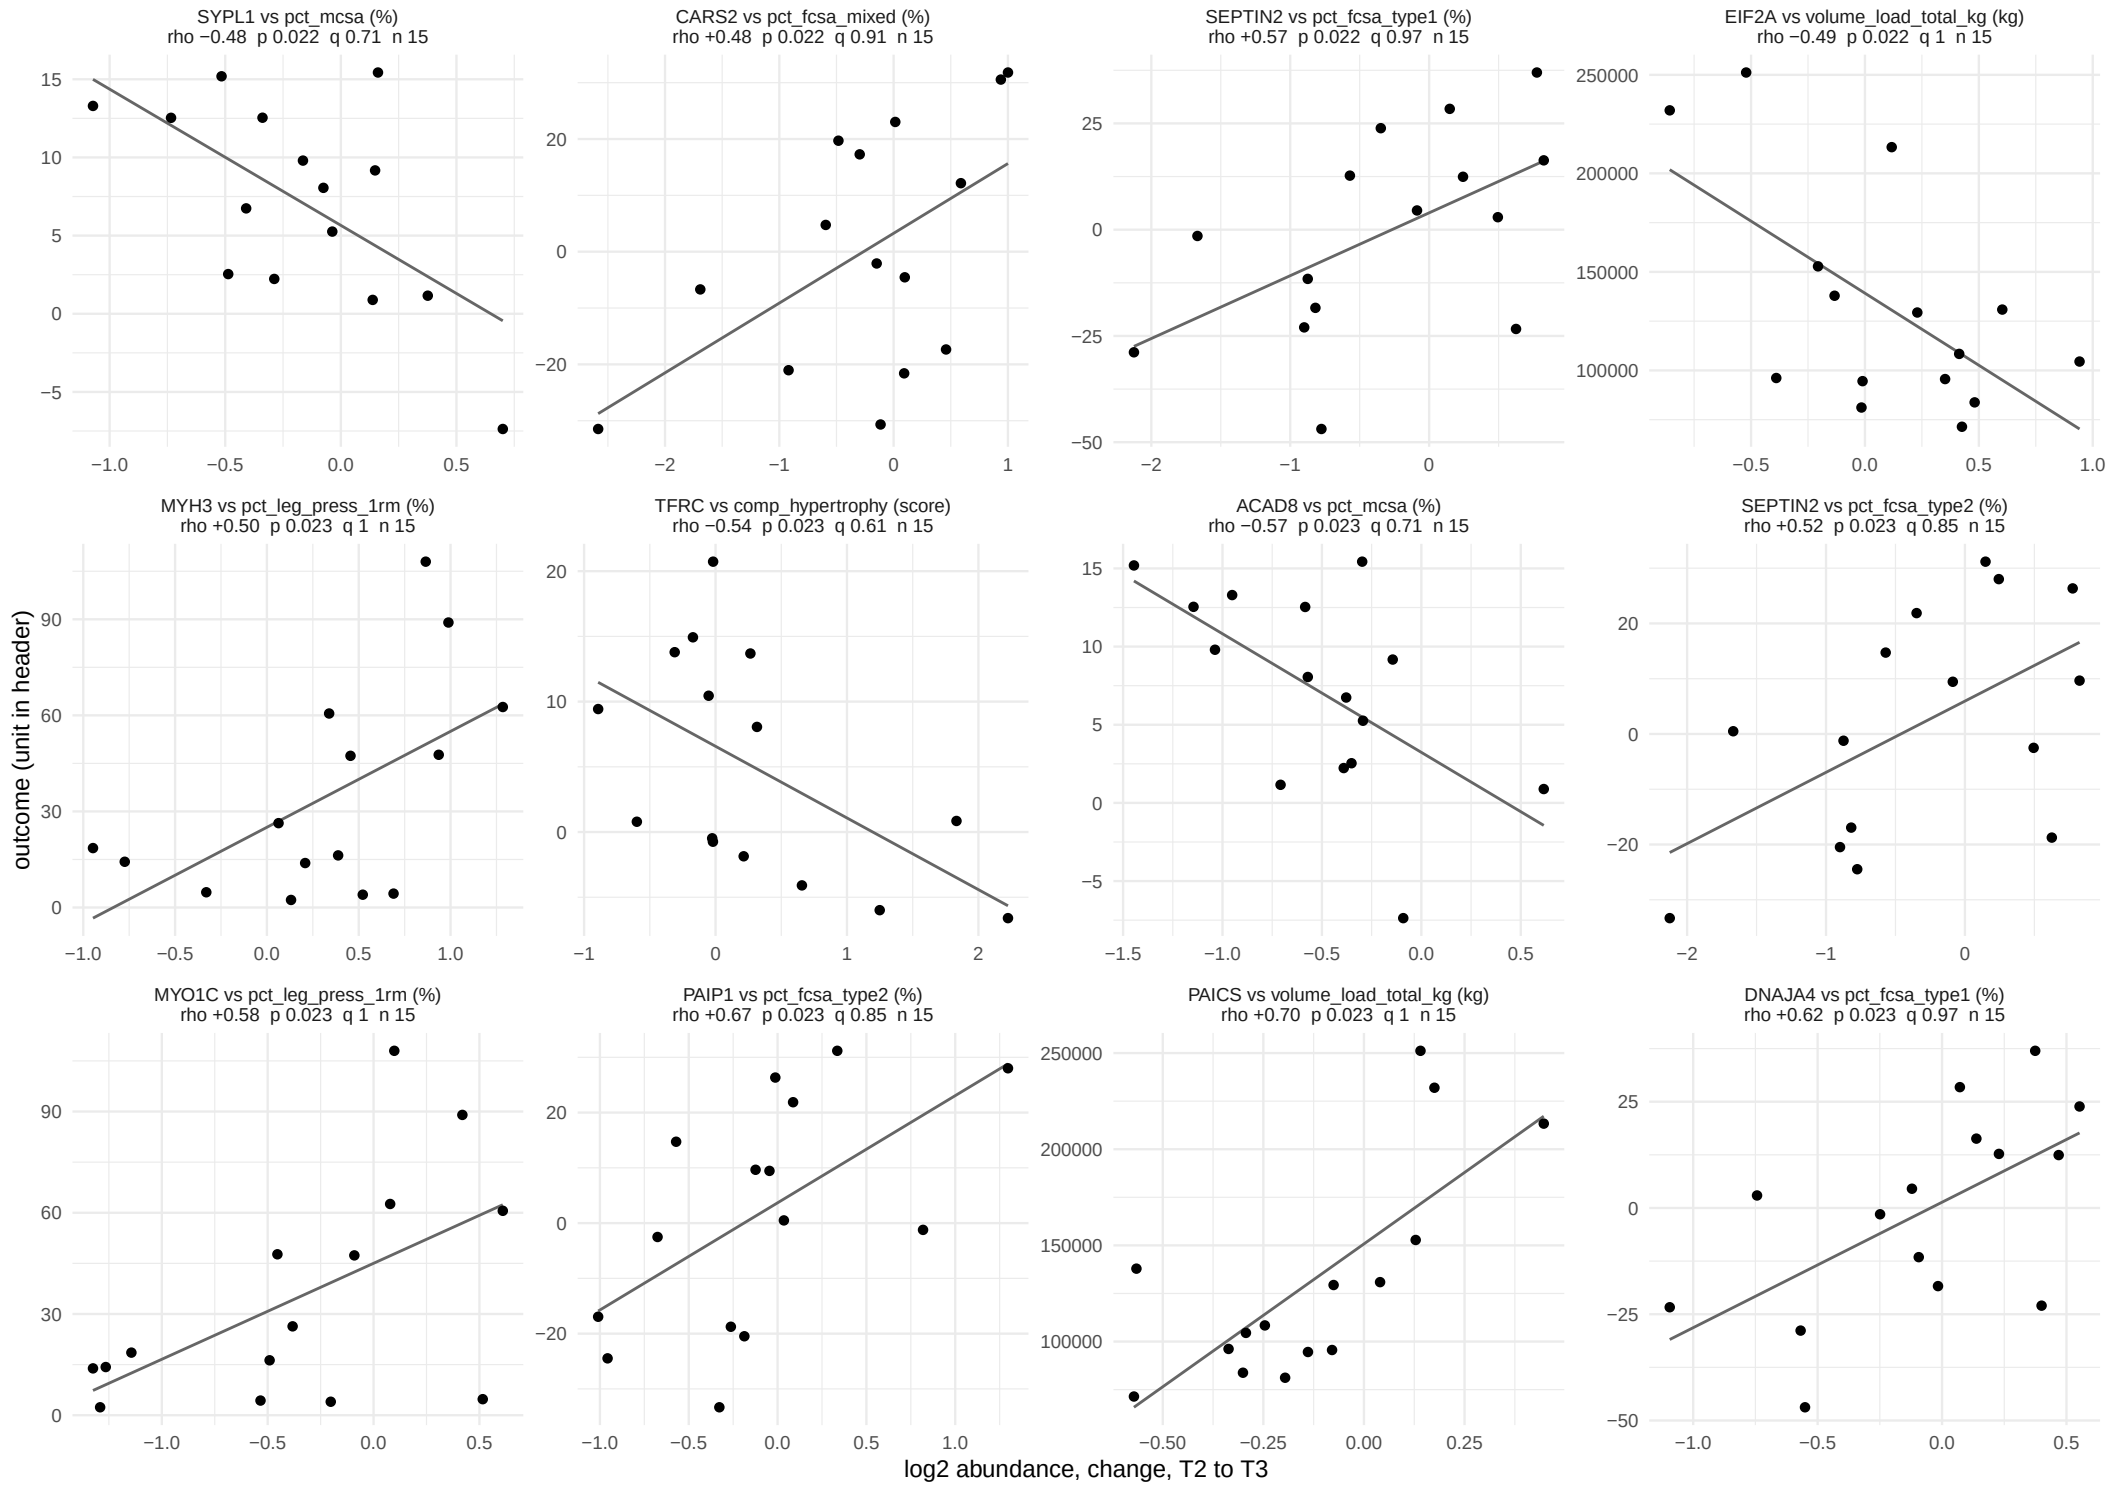

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, acute window


629 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 23 of 53.

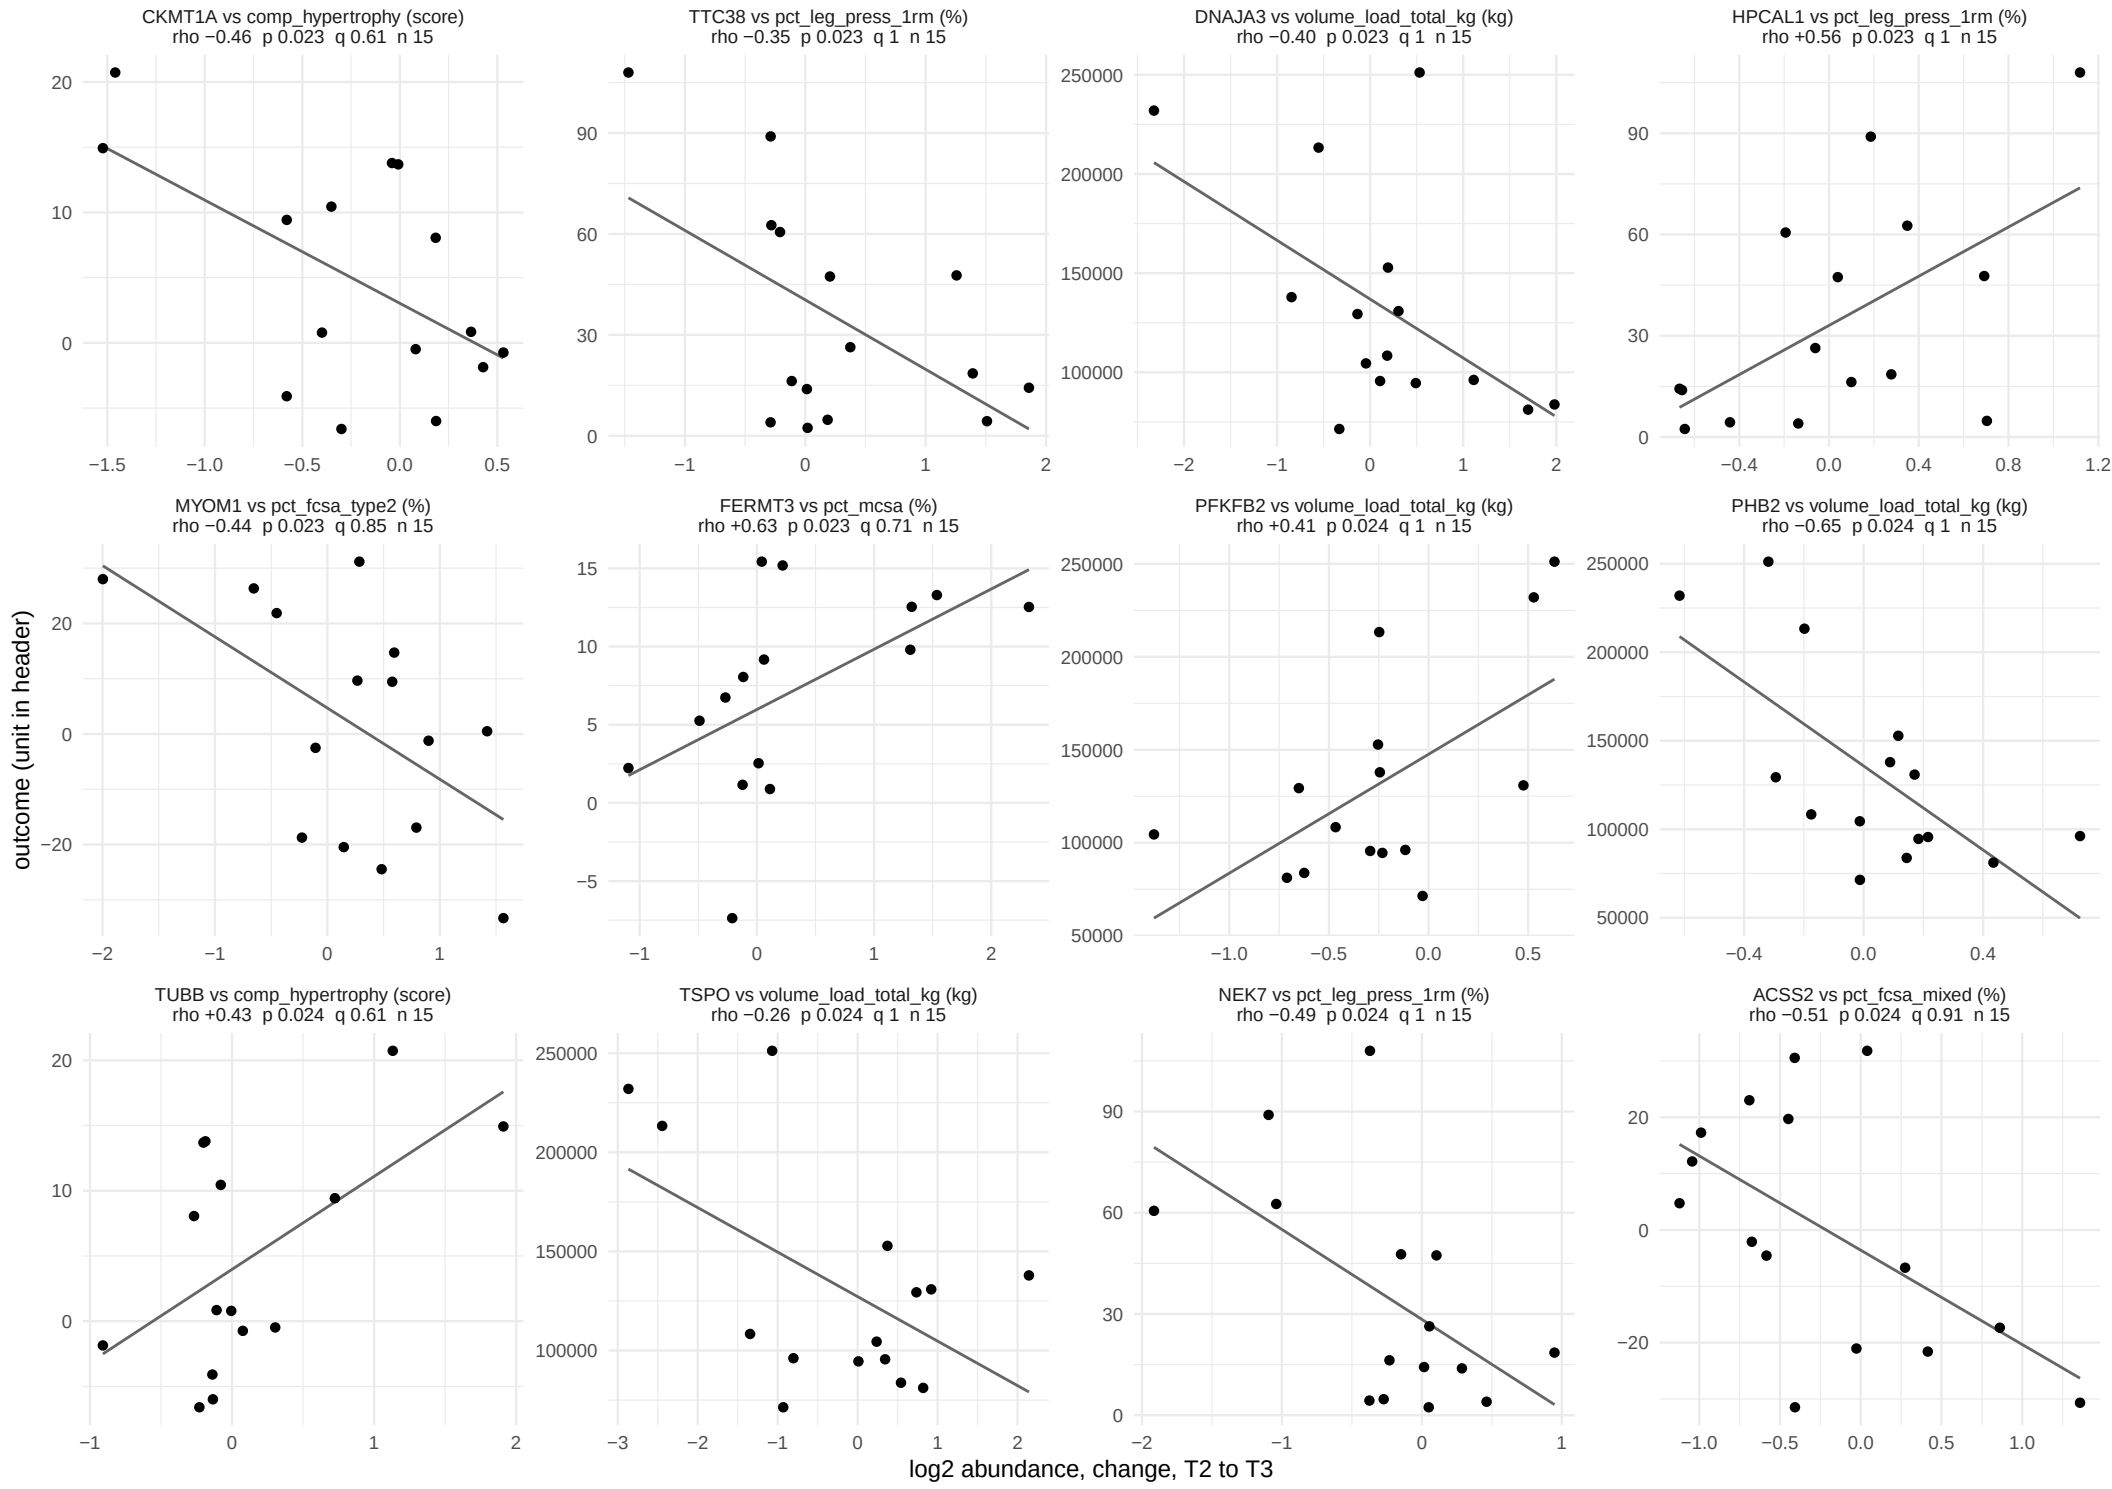

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, acute window


629 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 24 of 53.

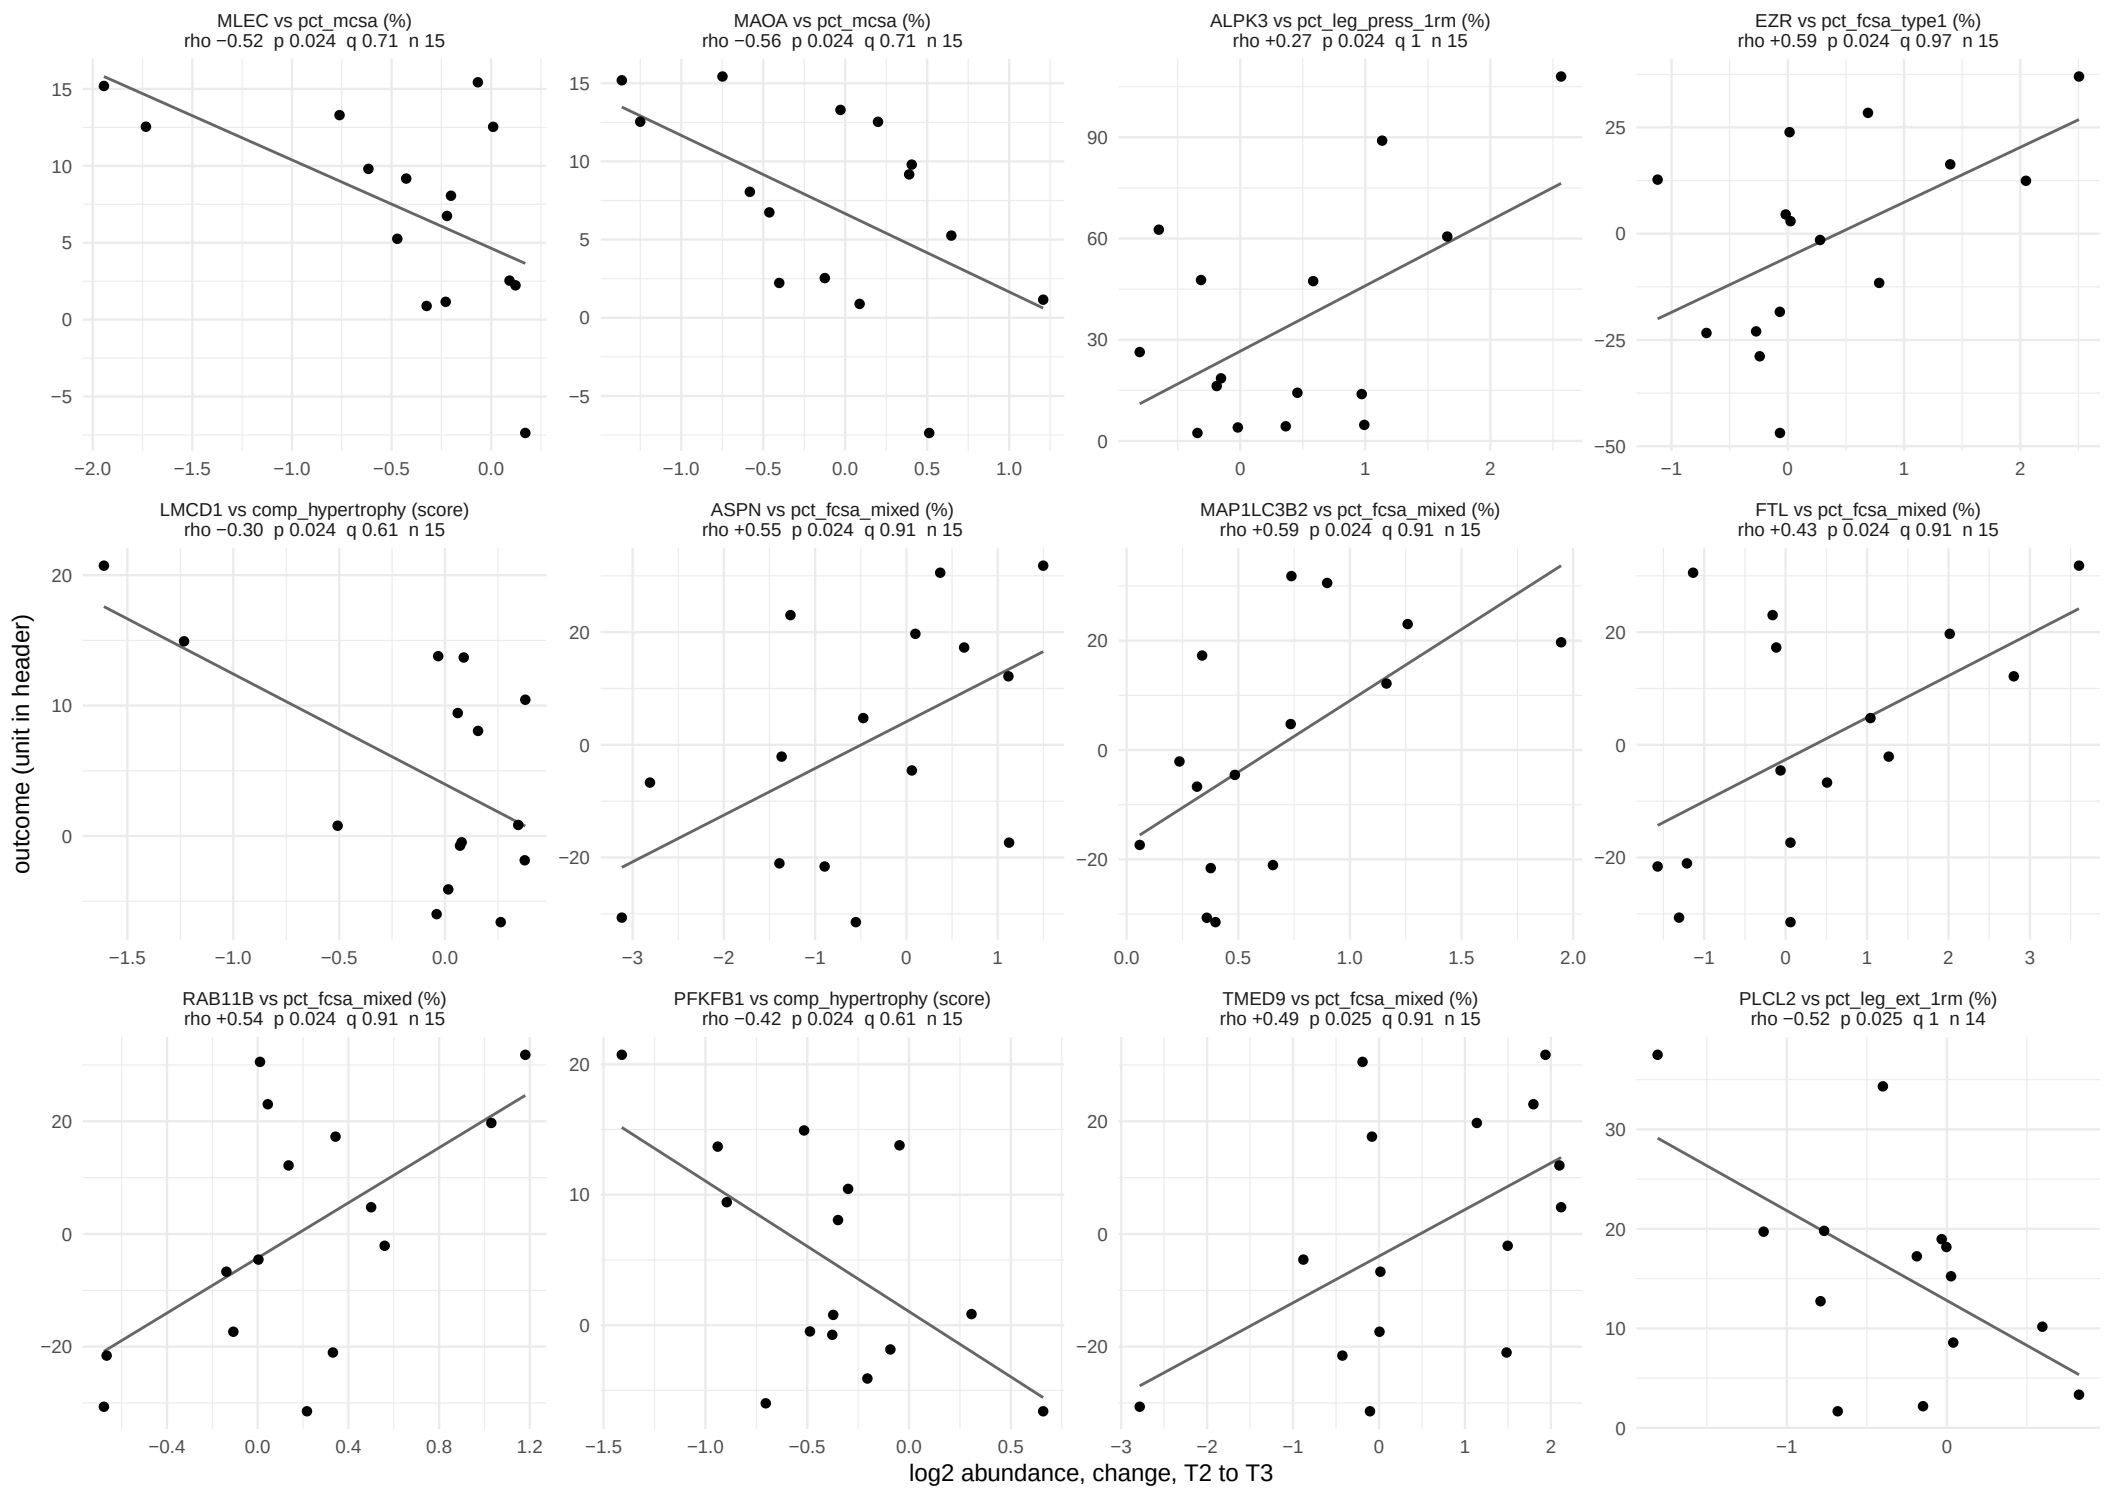

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, acute window


629 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 25 of 53.

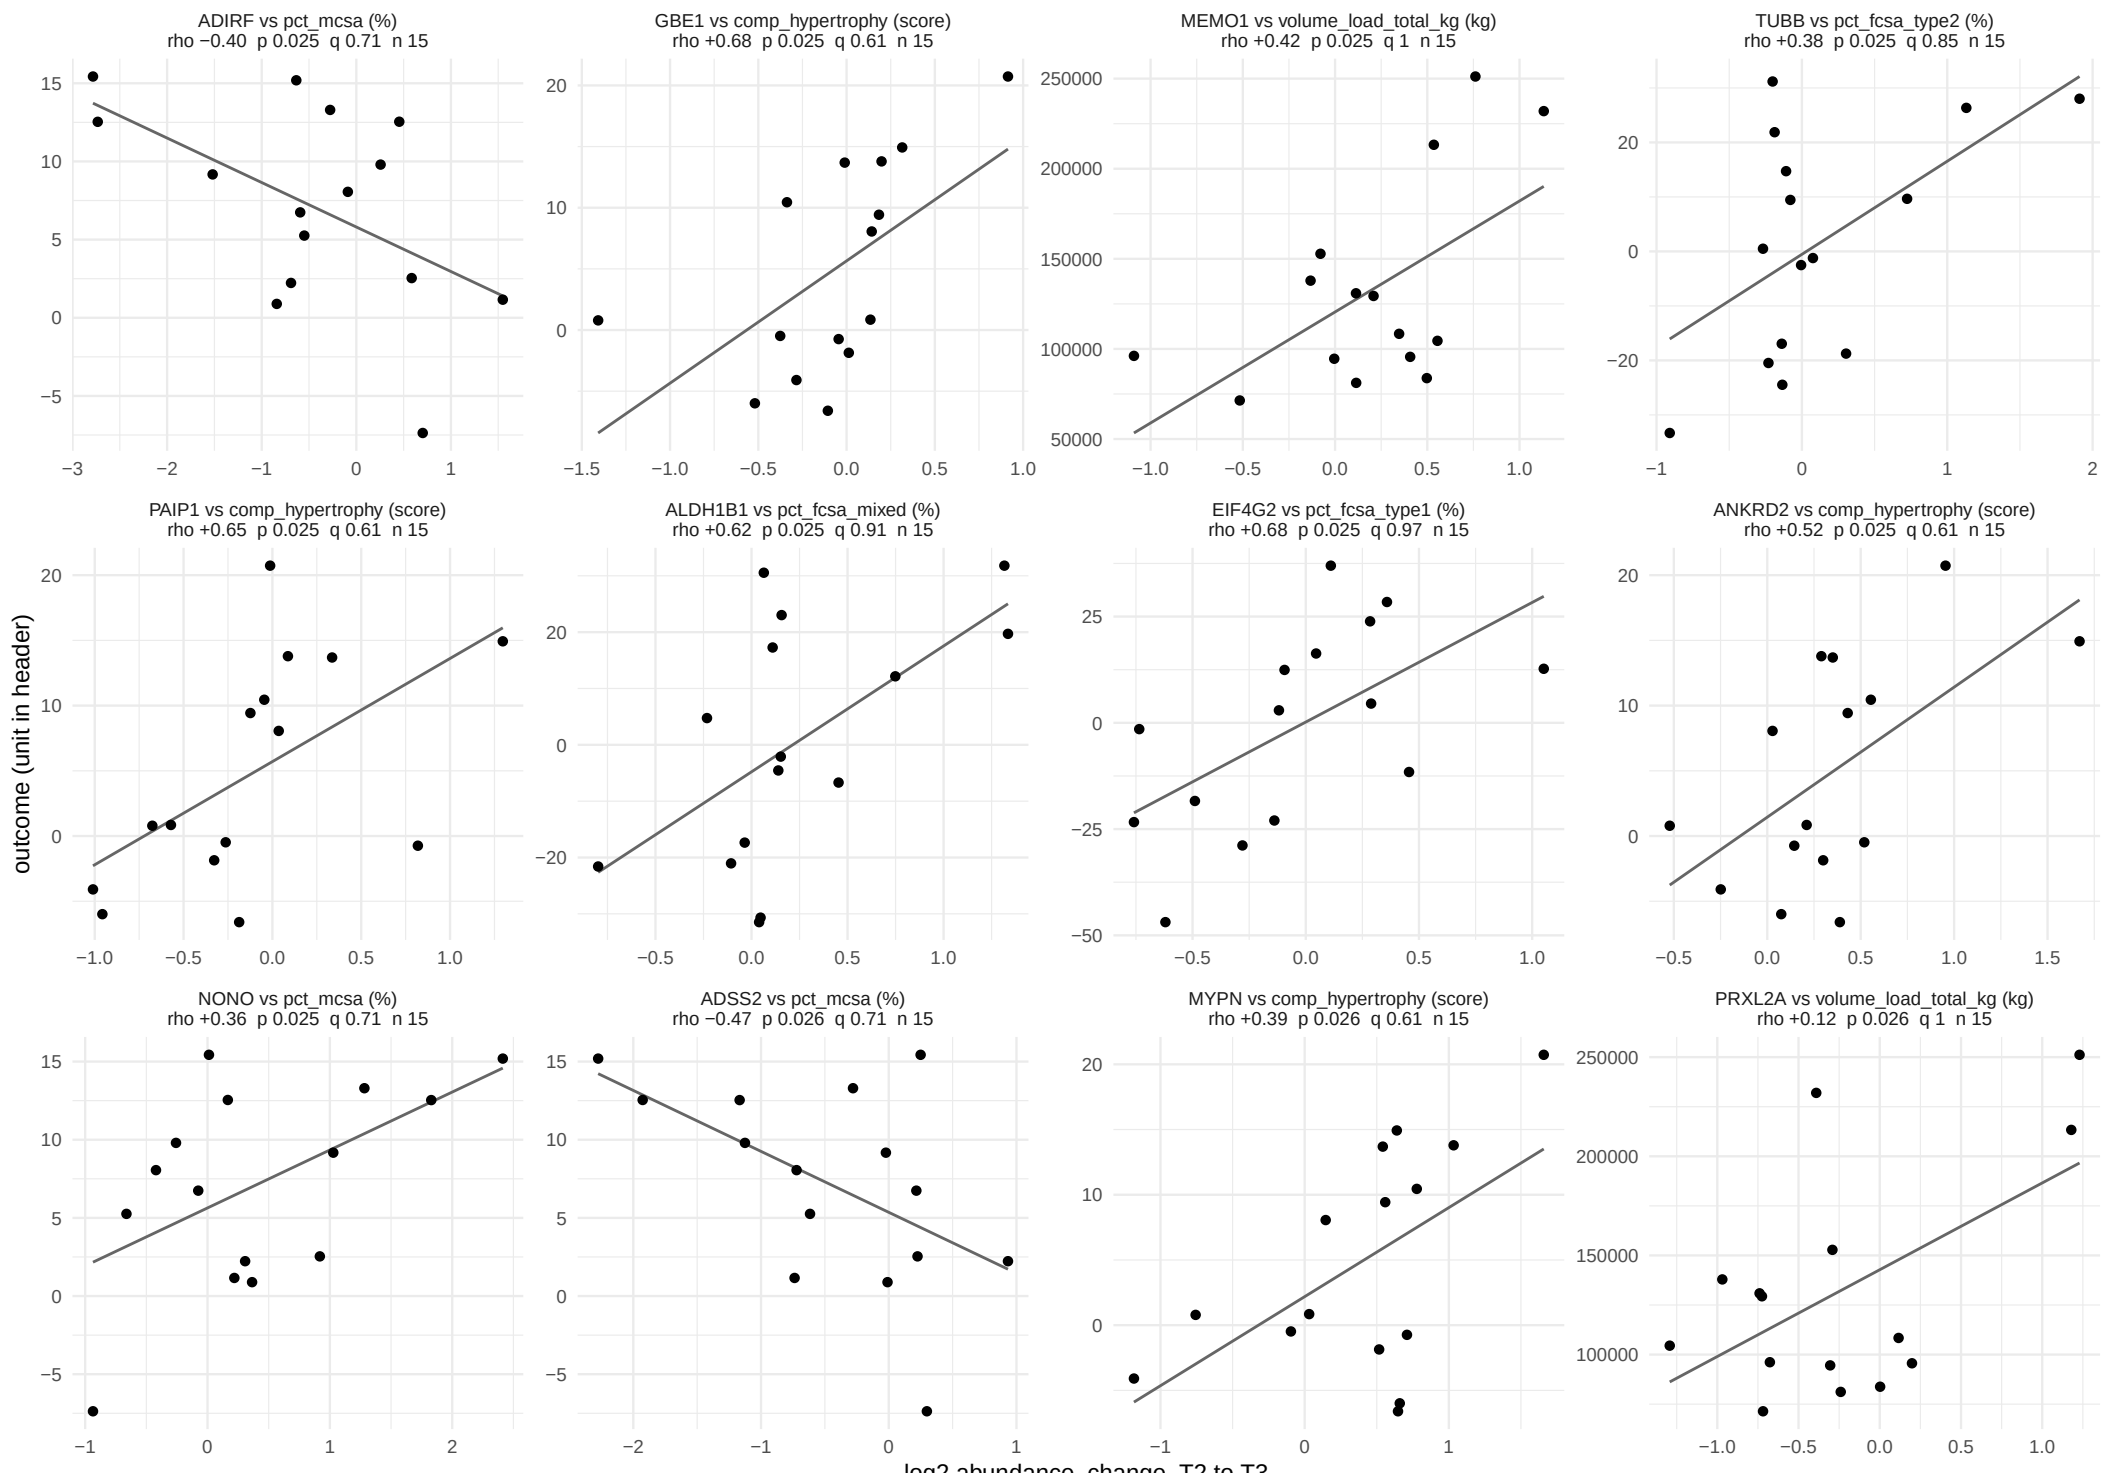

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, acute window


629 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 26 of 53.

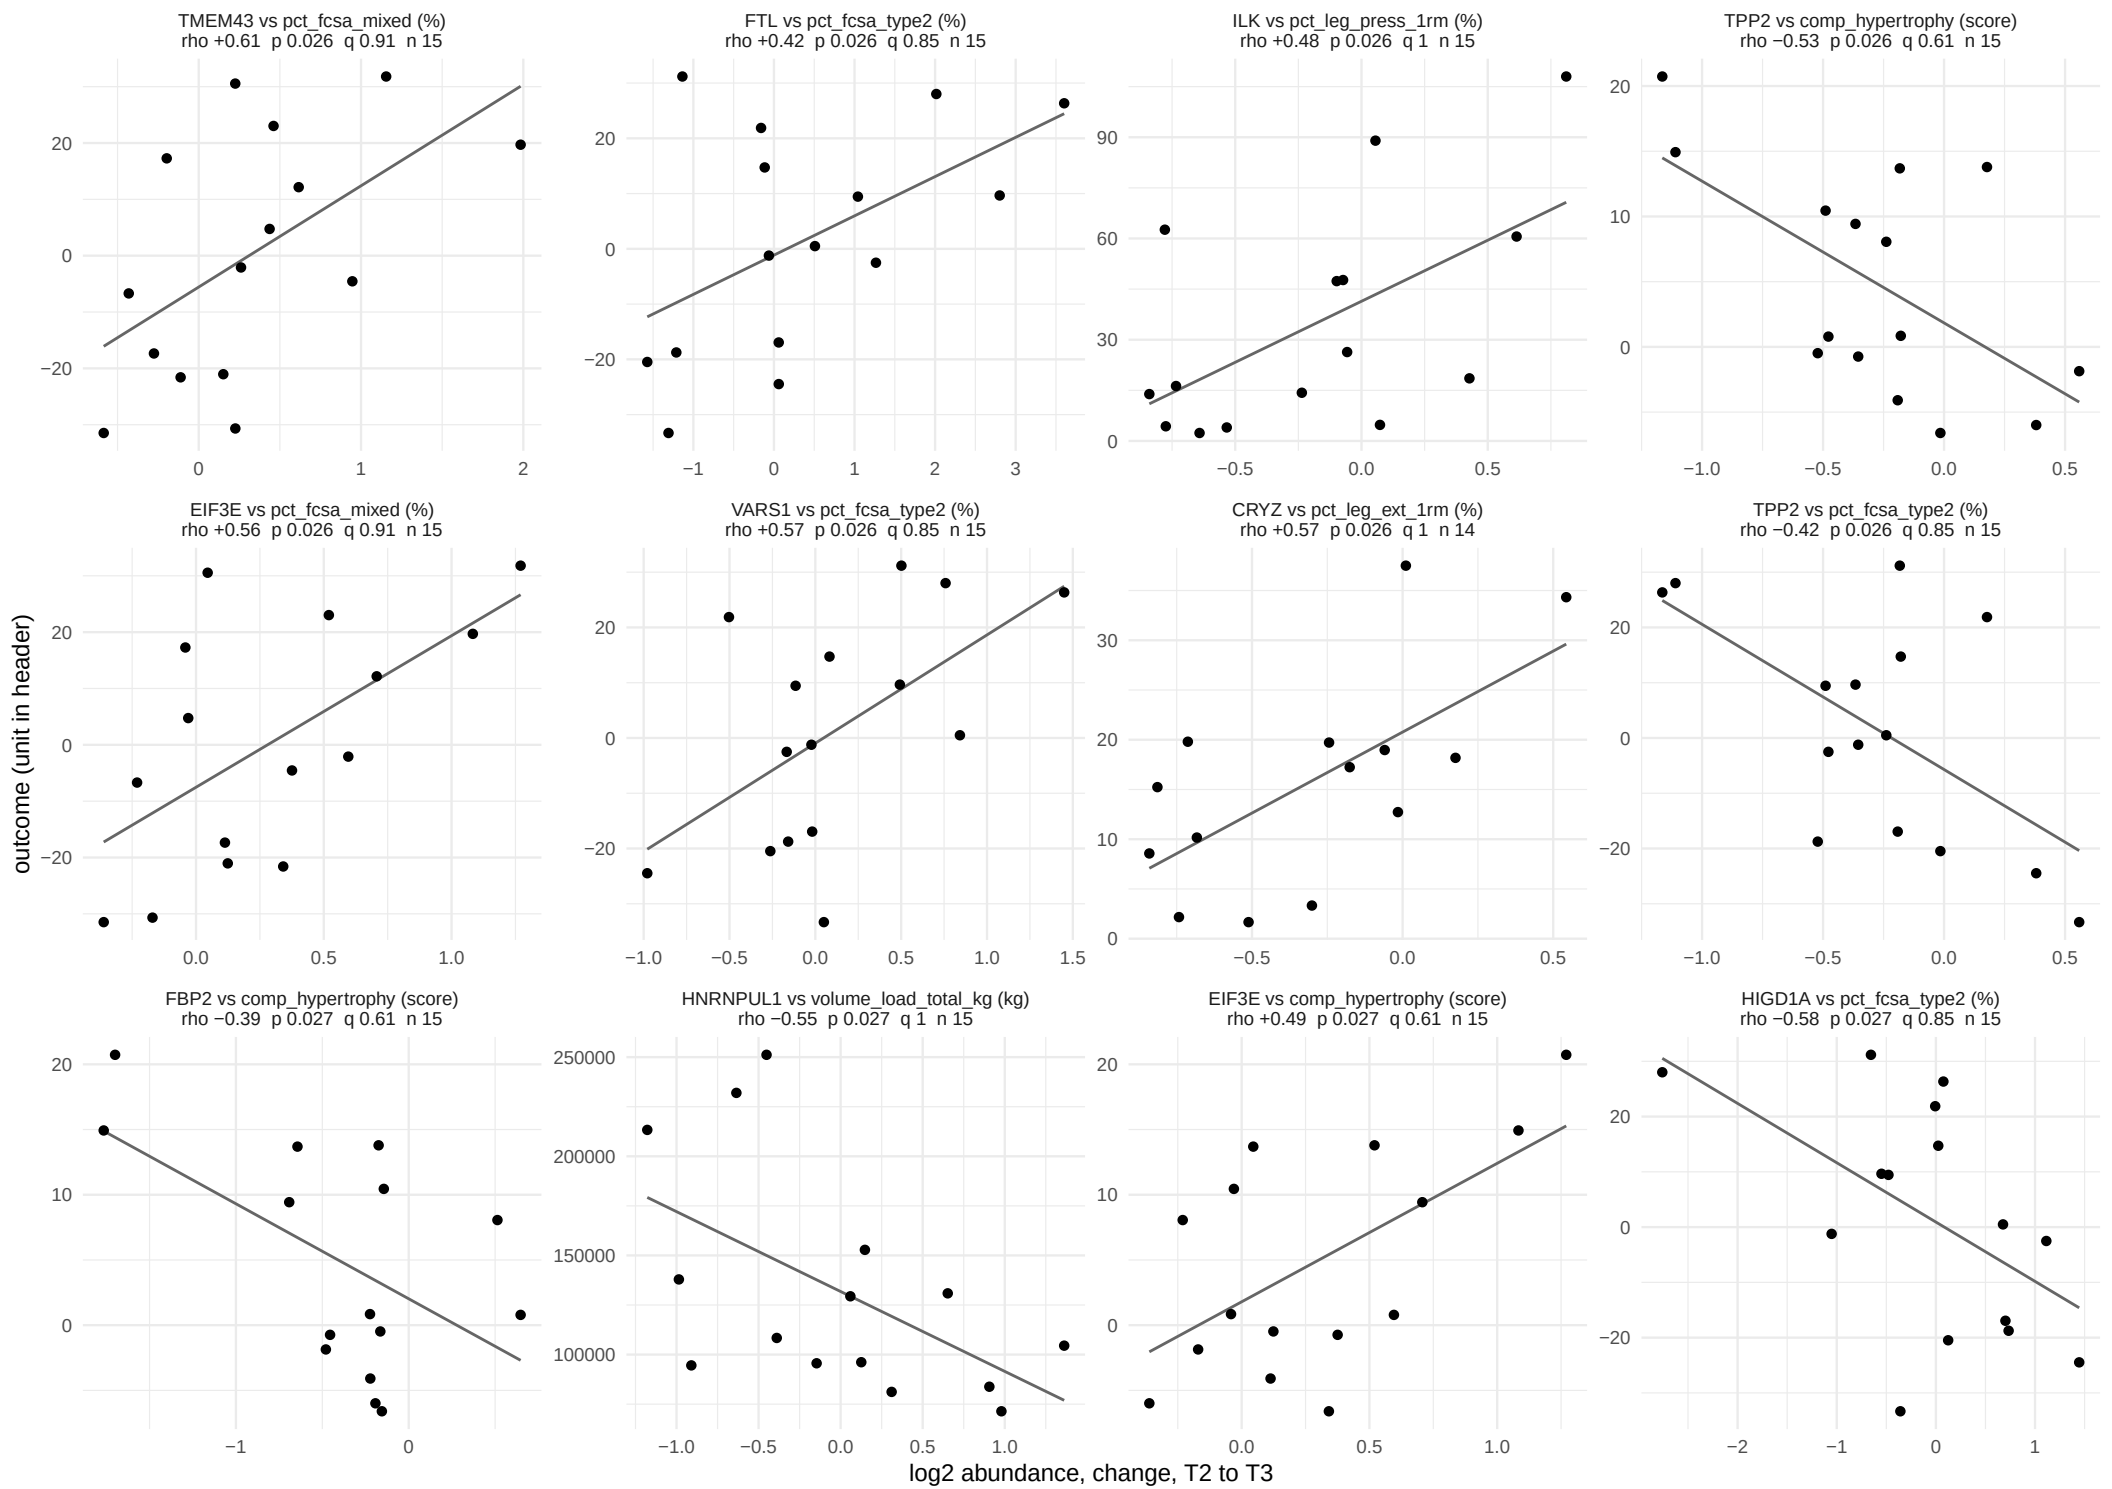

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, acute window


629 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 27 of 53.

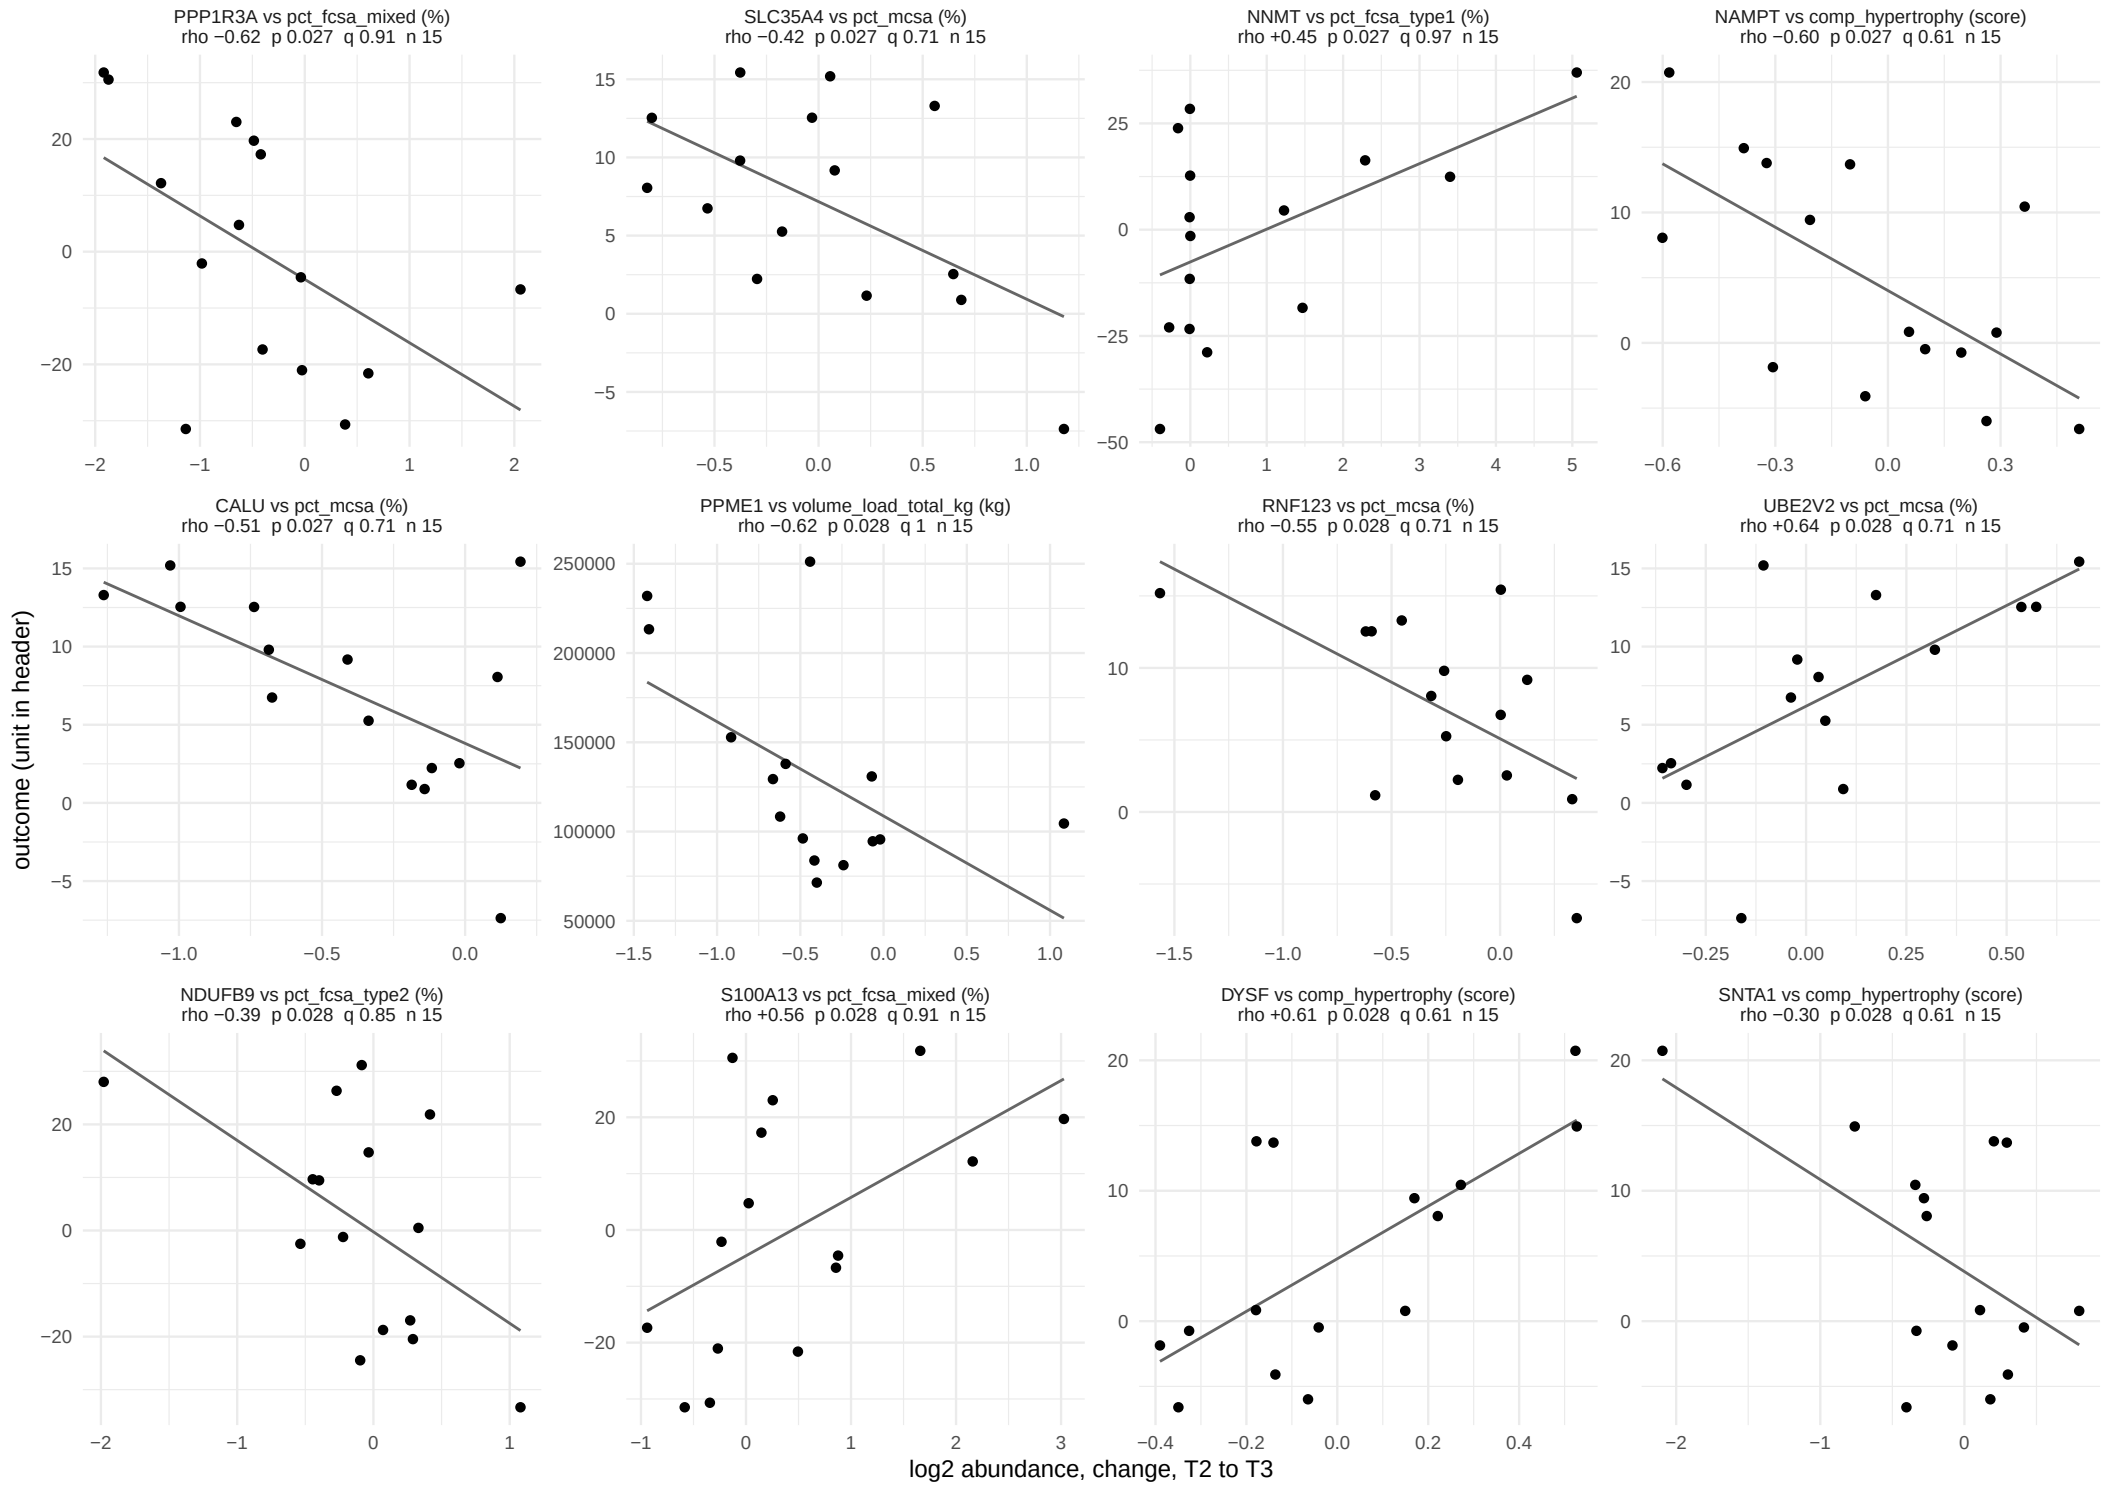

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, acute window


629 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 28 of 53.

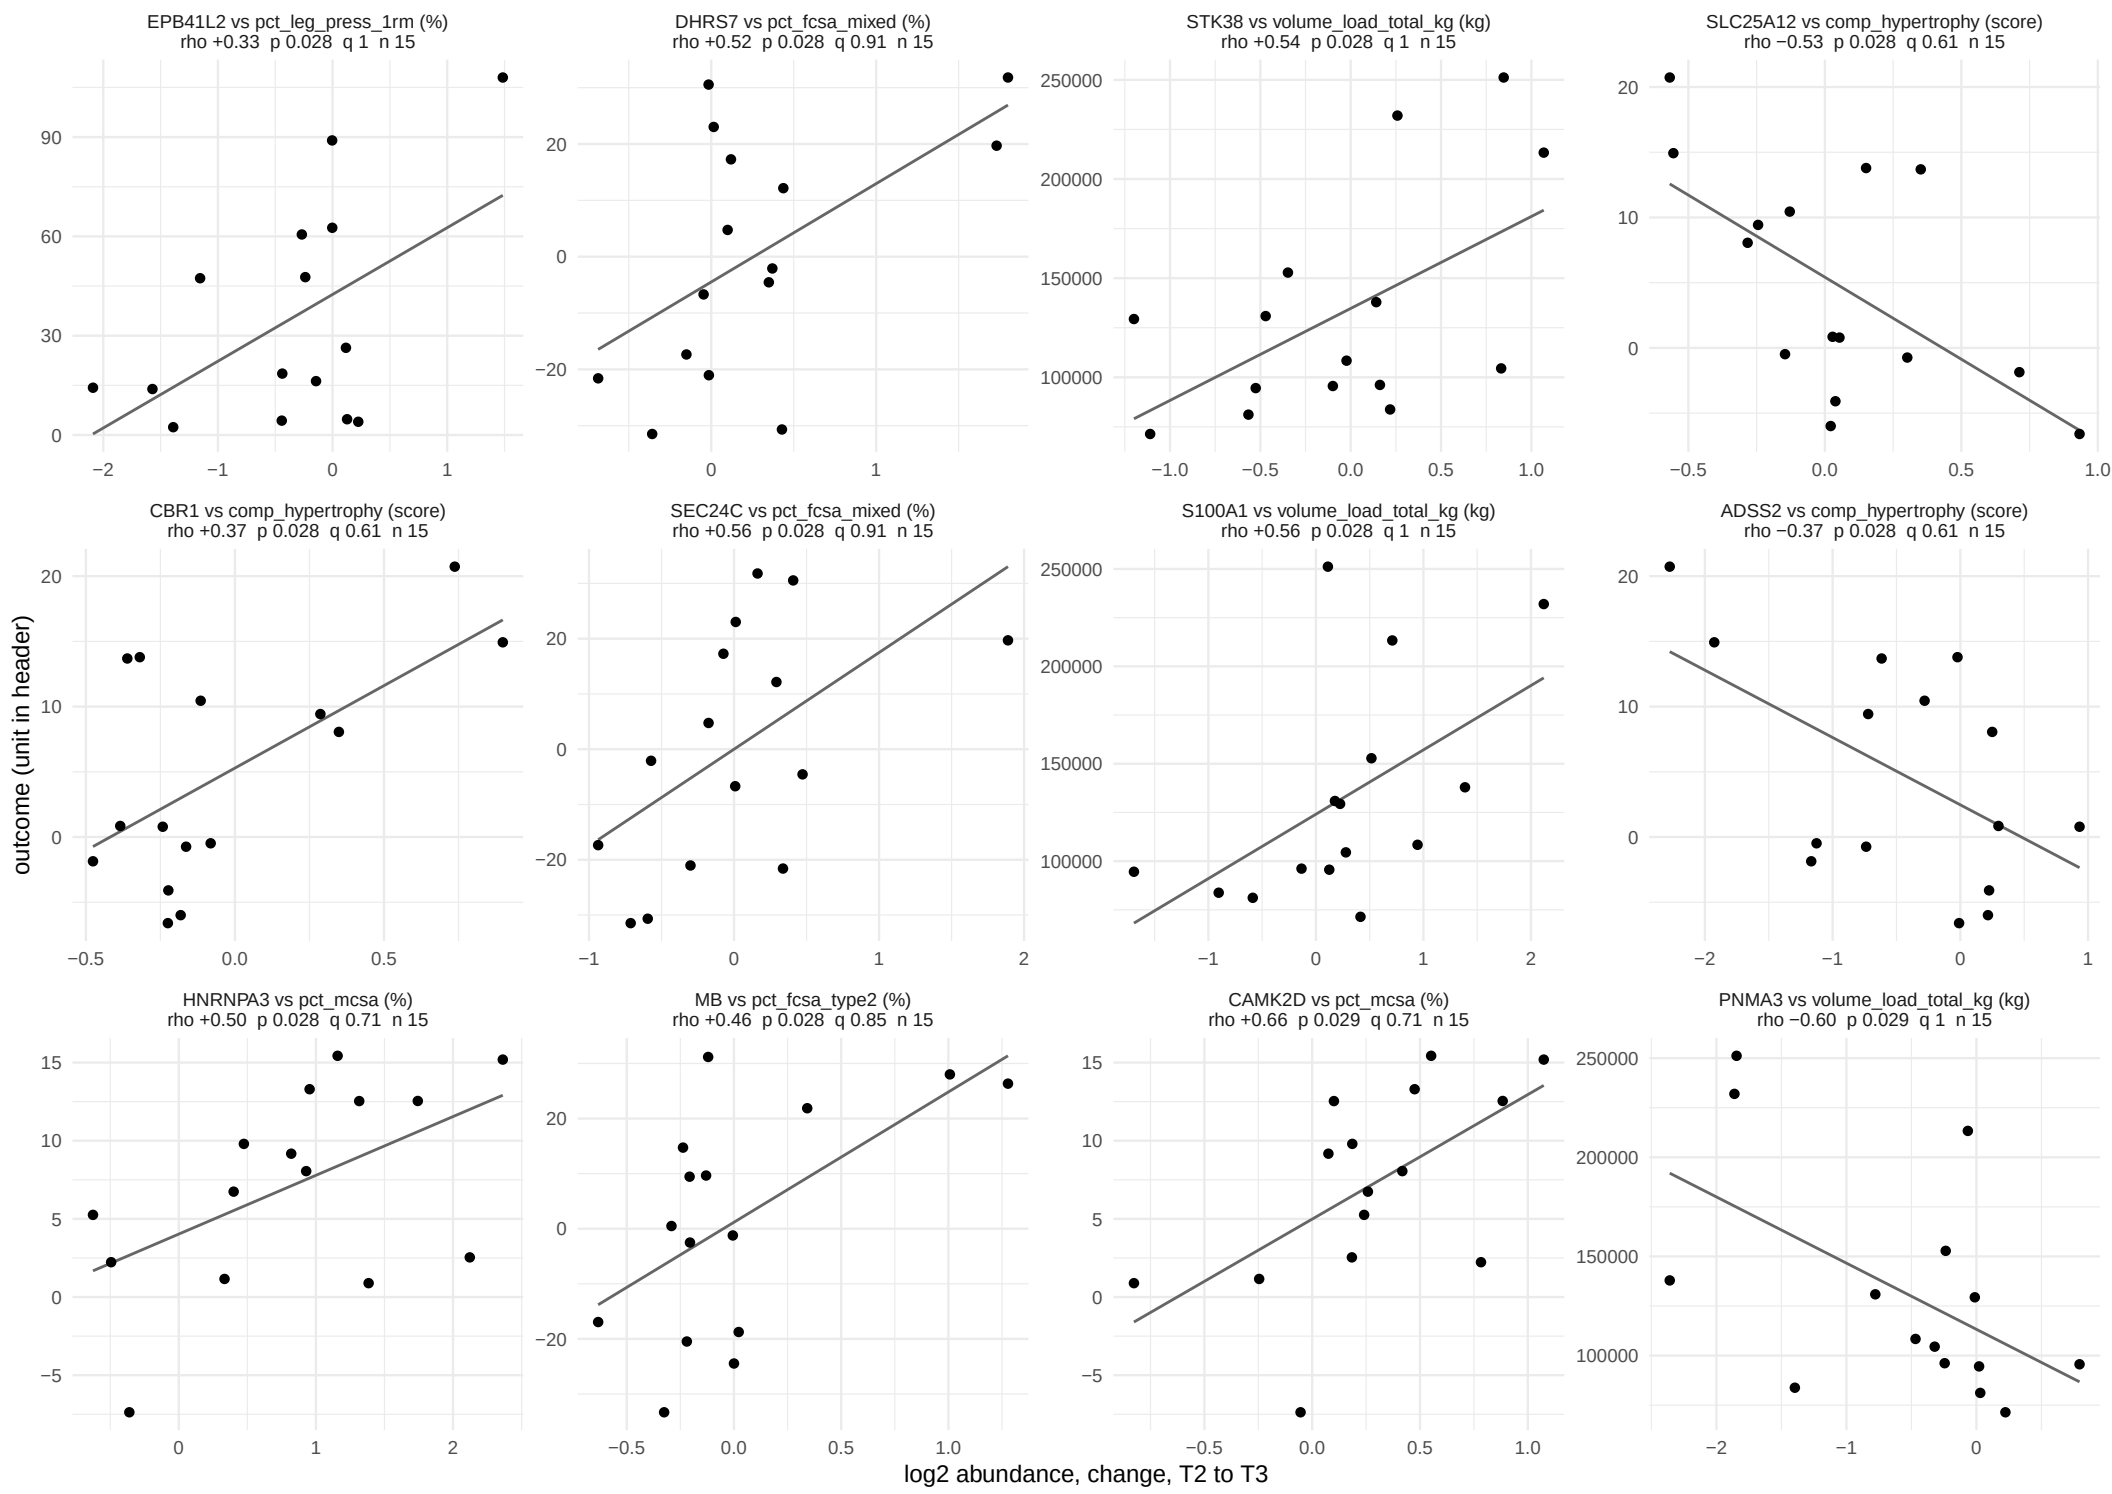

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, acute window


629 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 29 of 53.

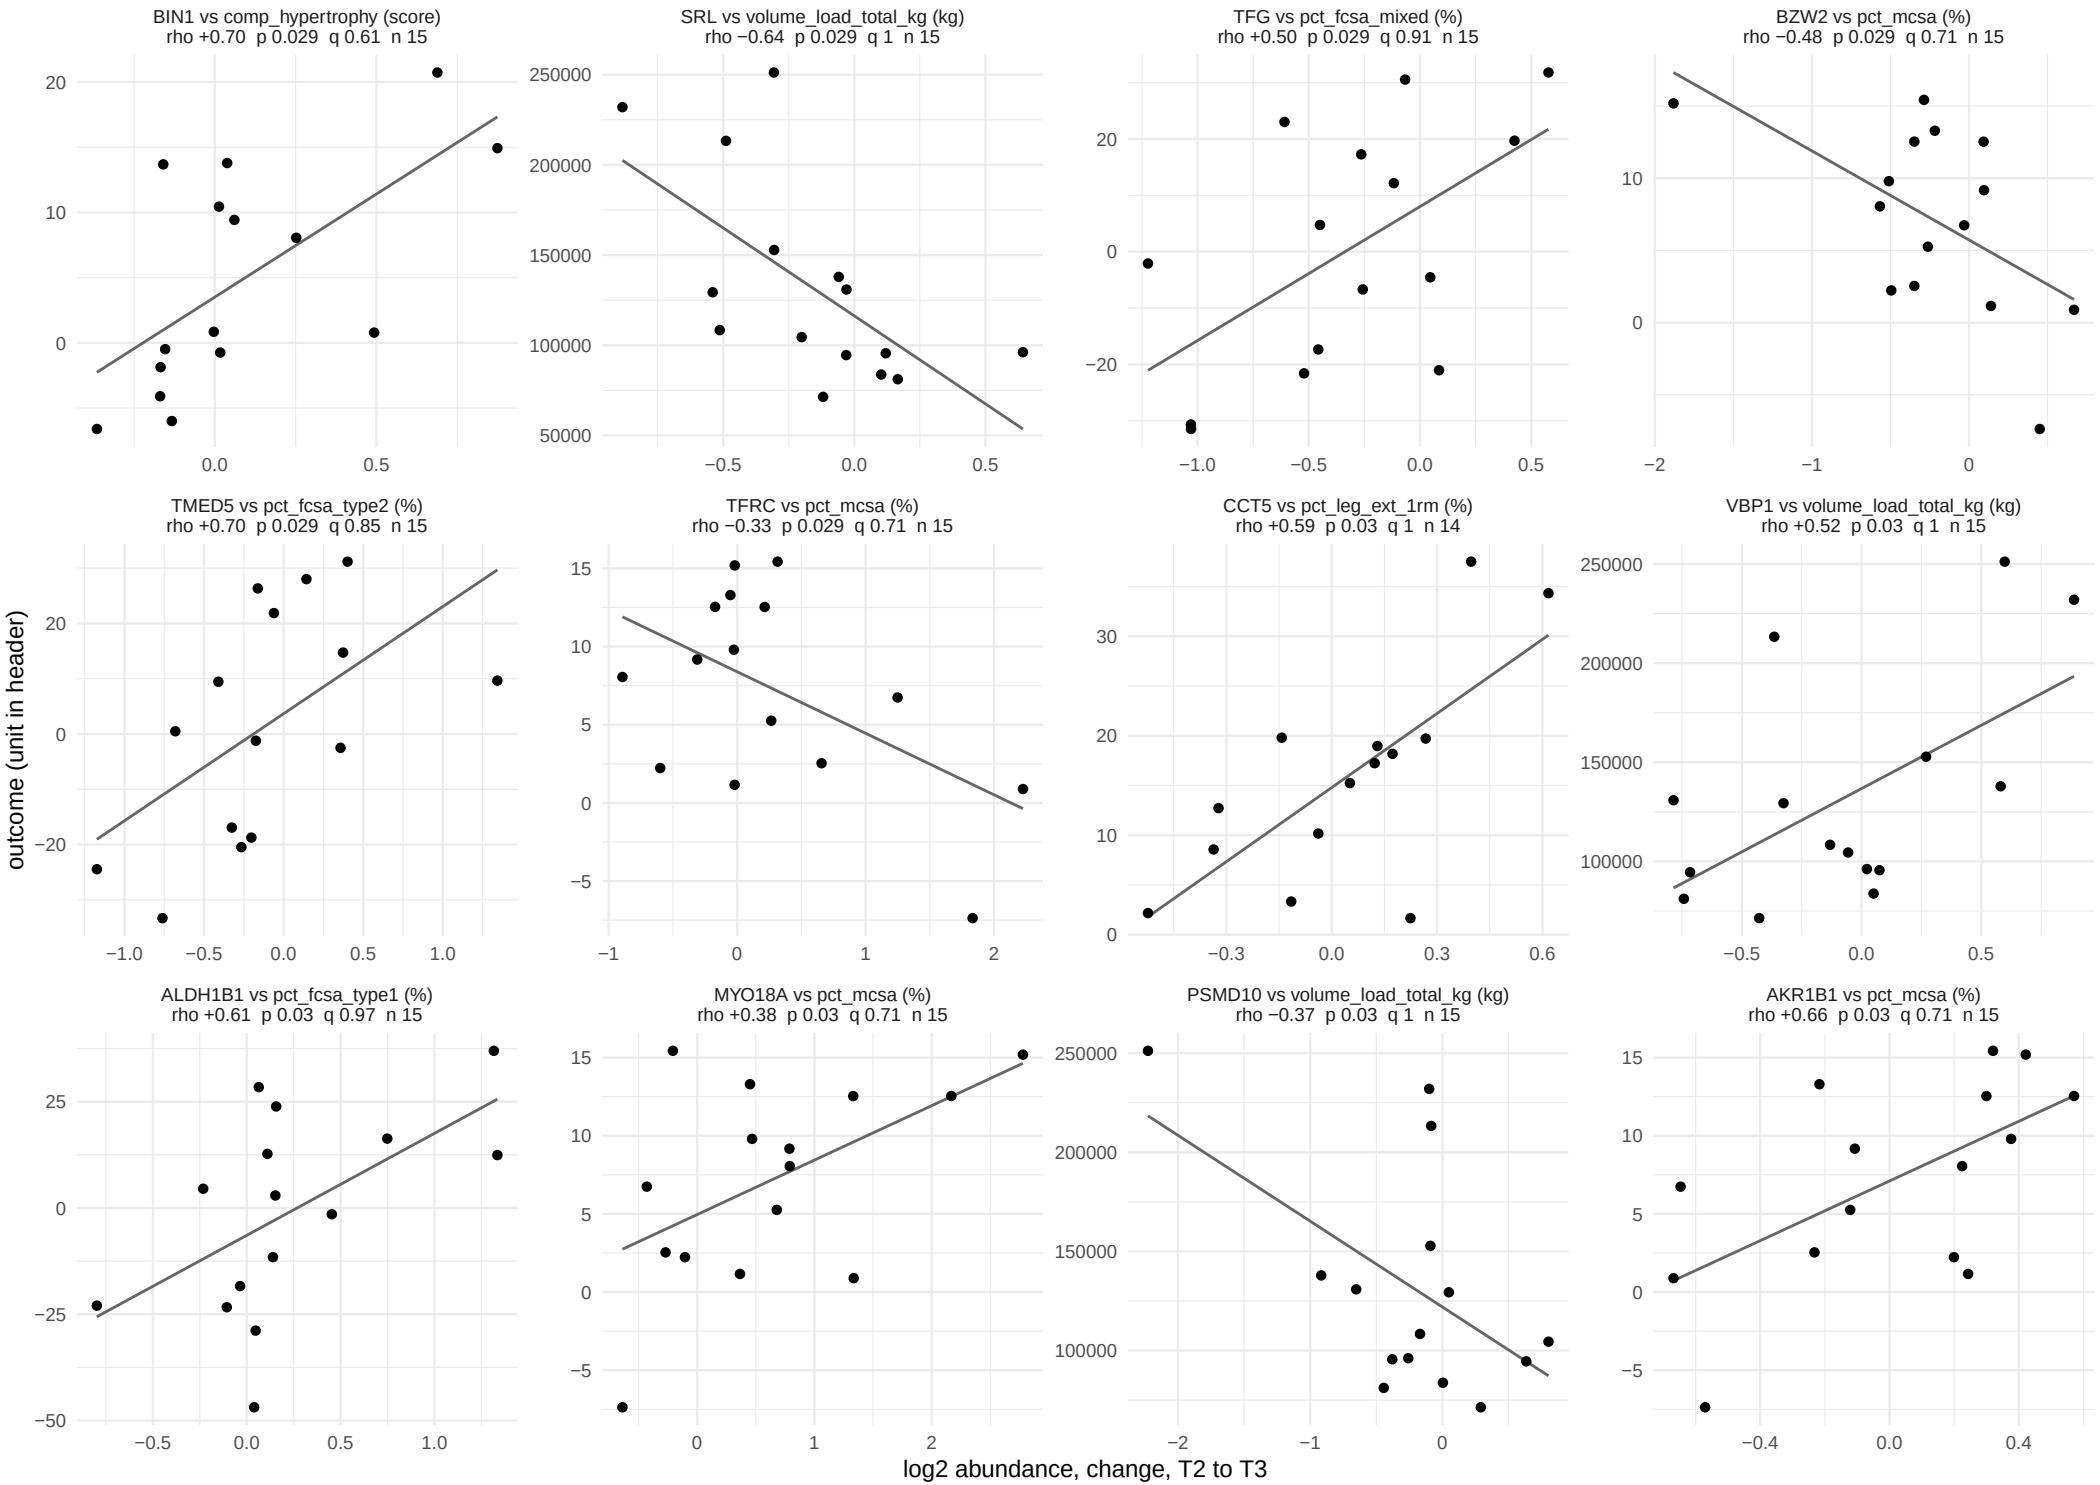

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, acute window


629 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 30 of 53.

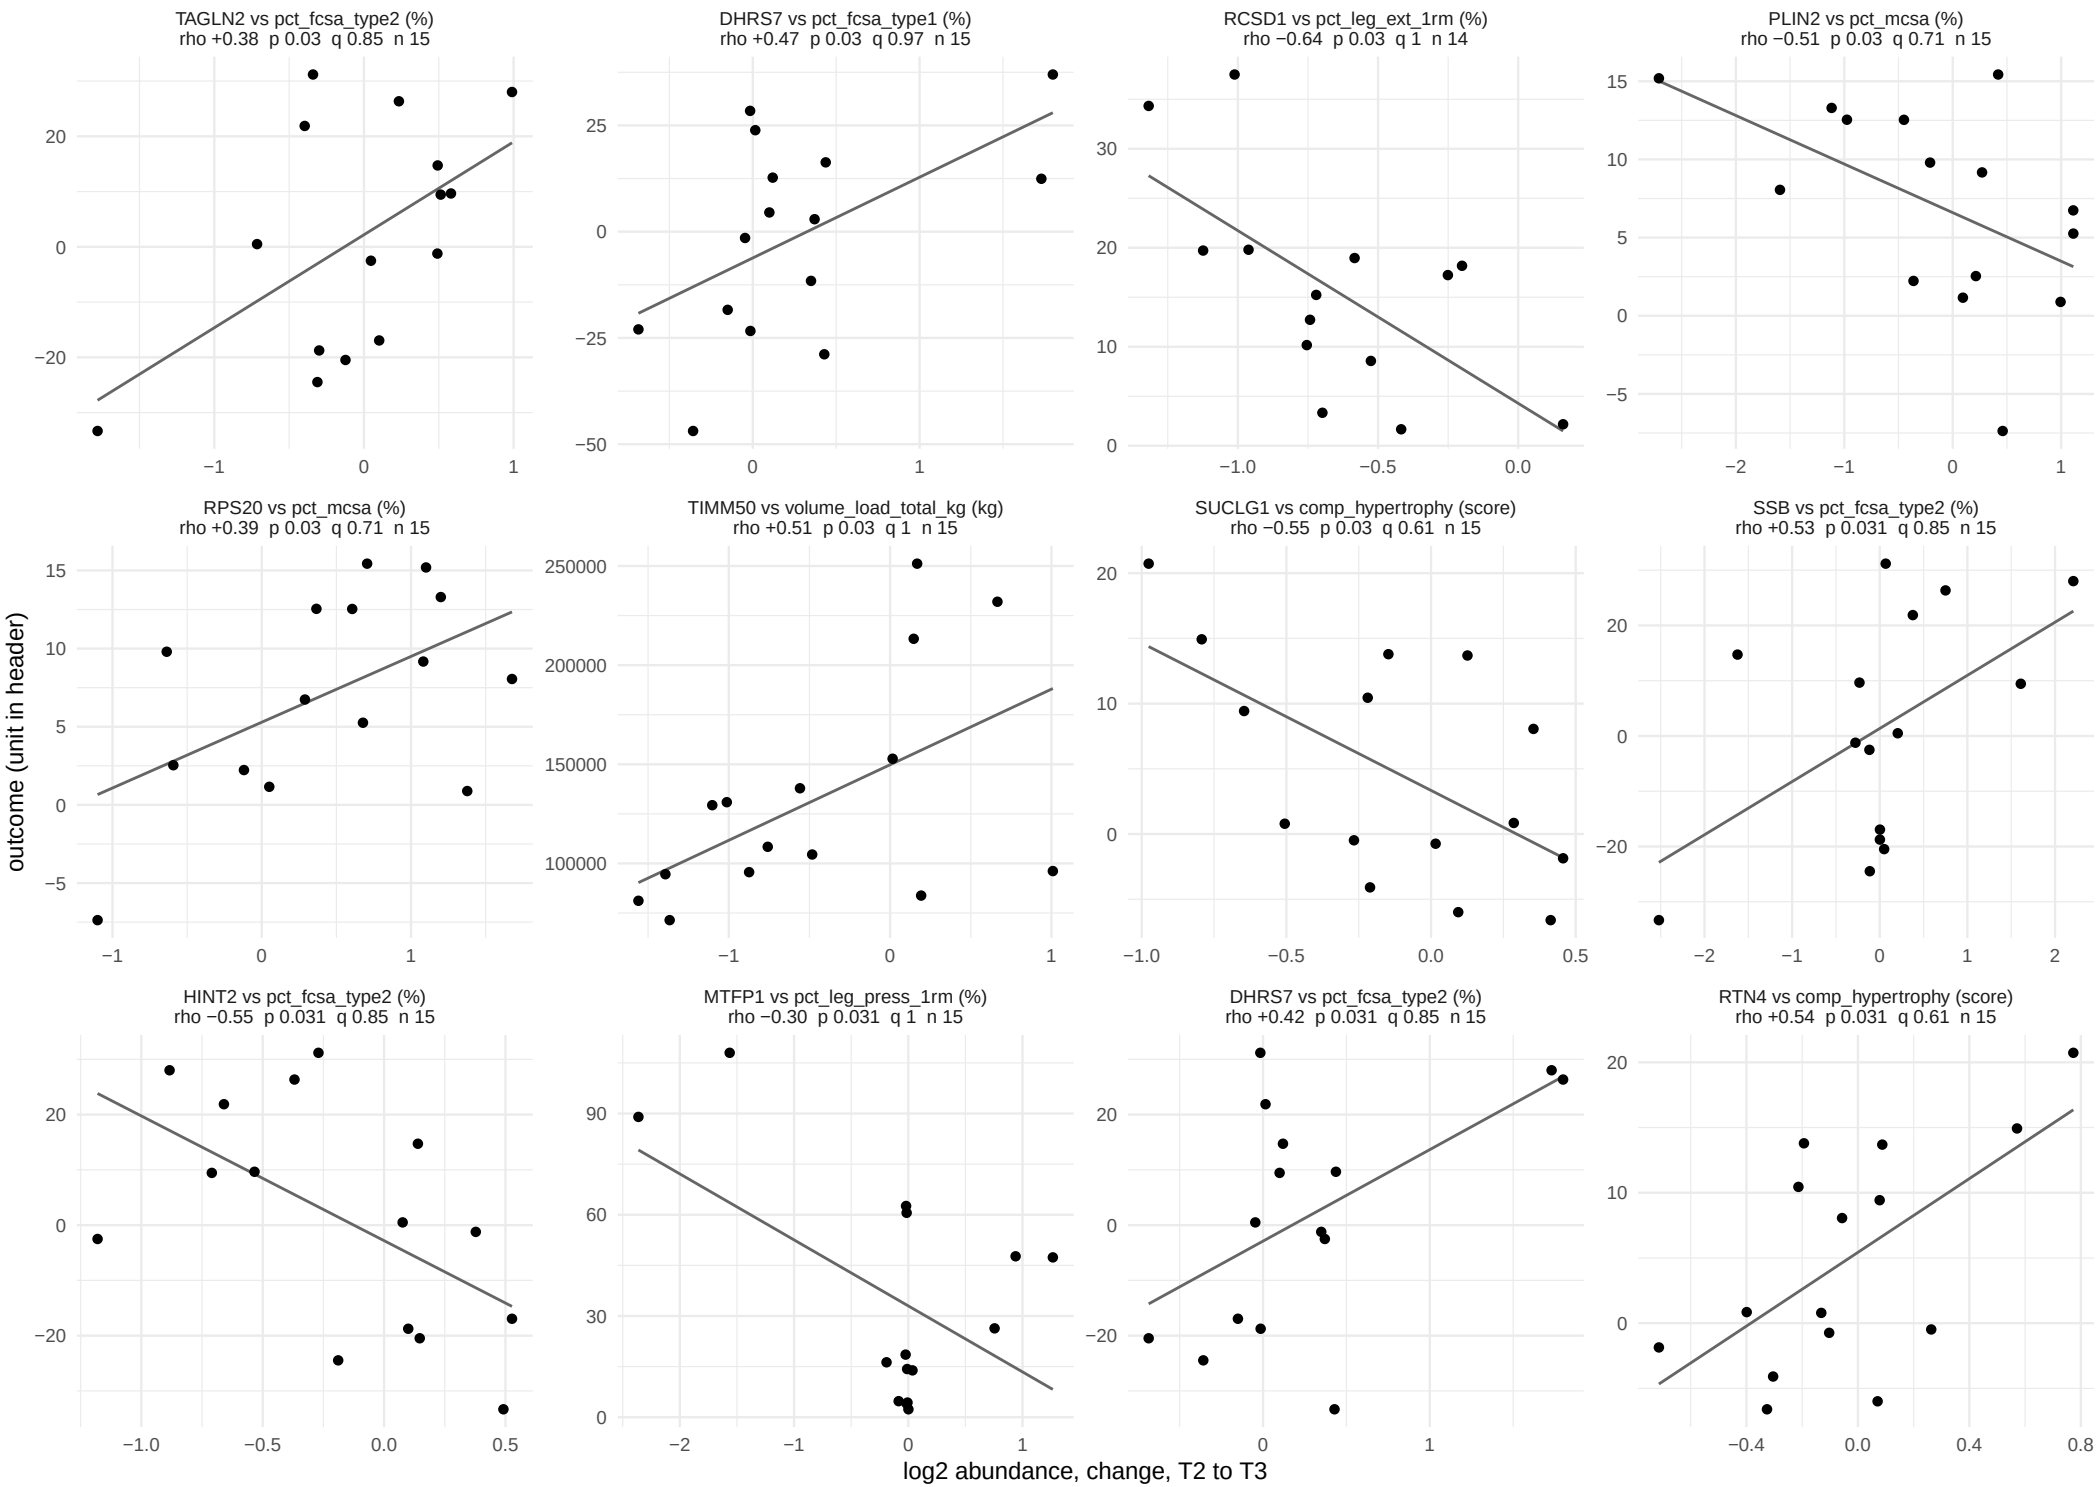

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, acute window


629 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 31 of 53.

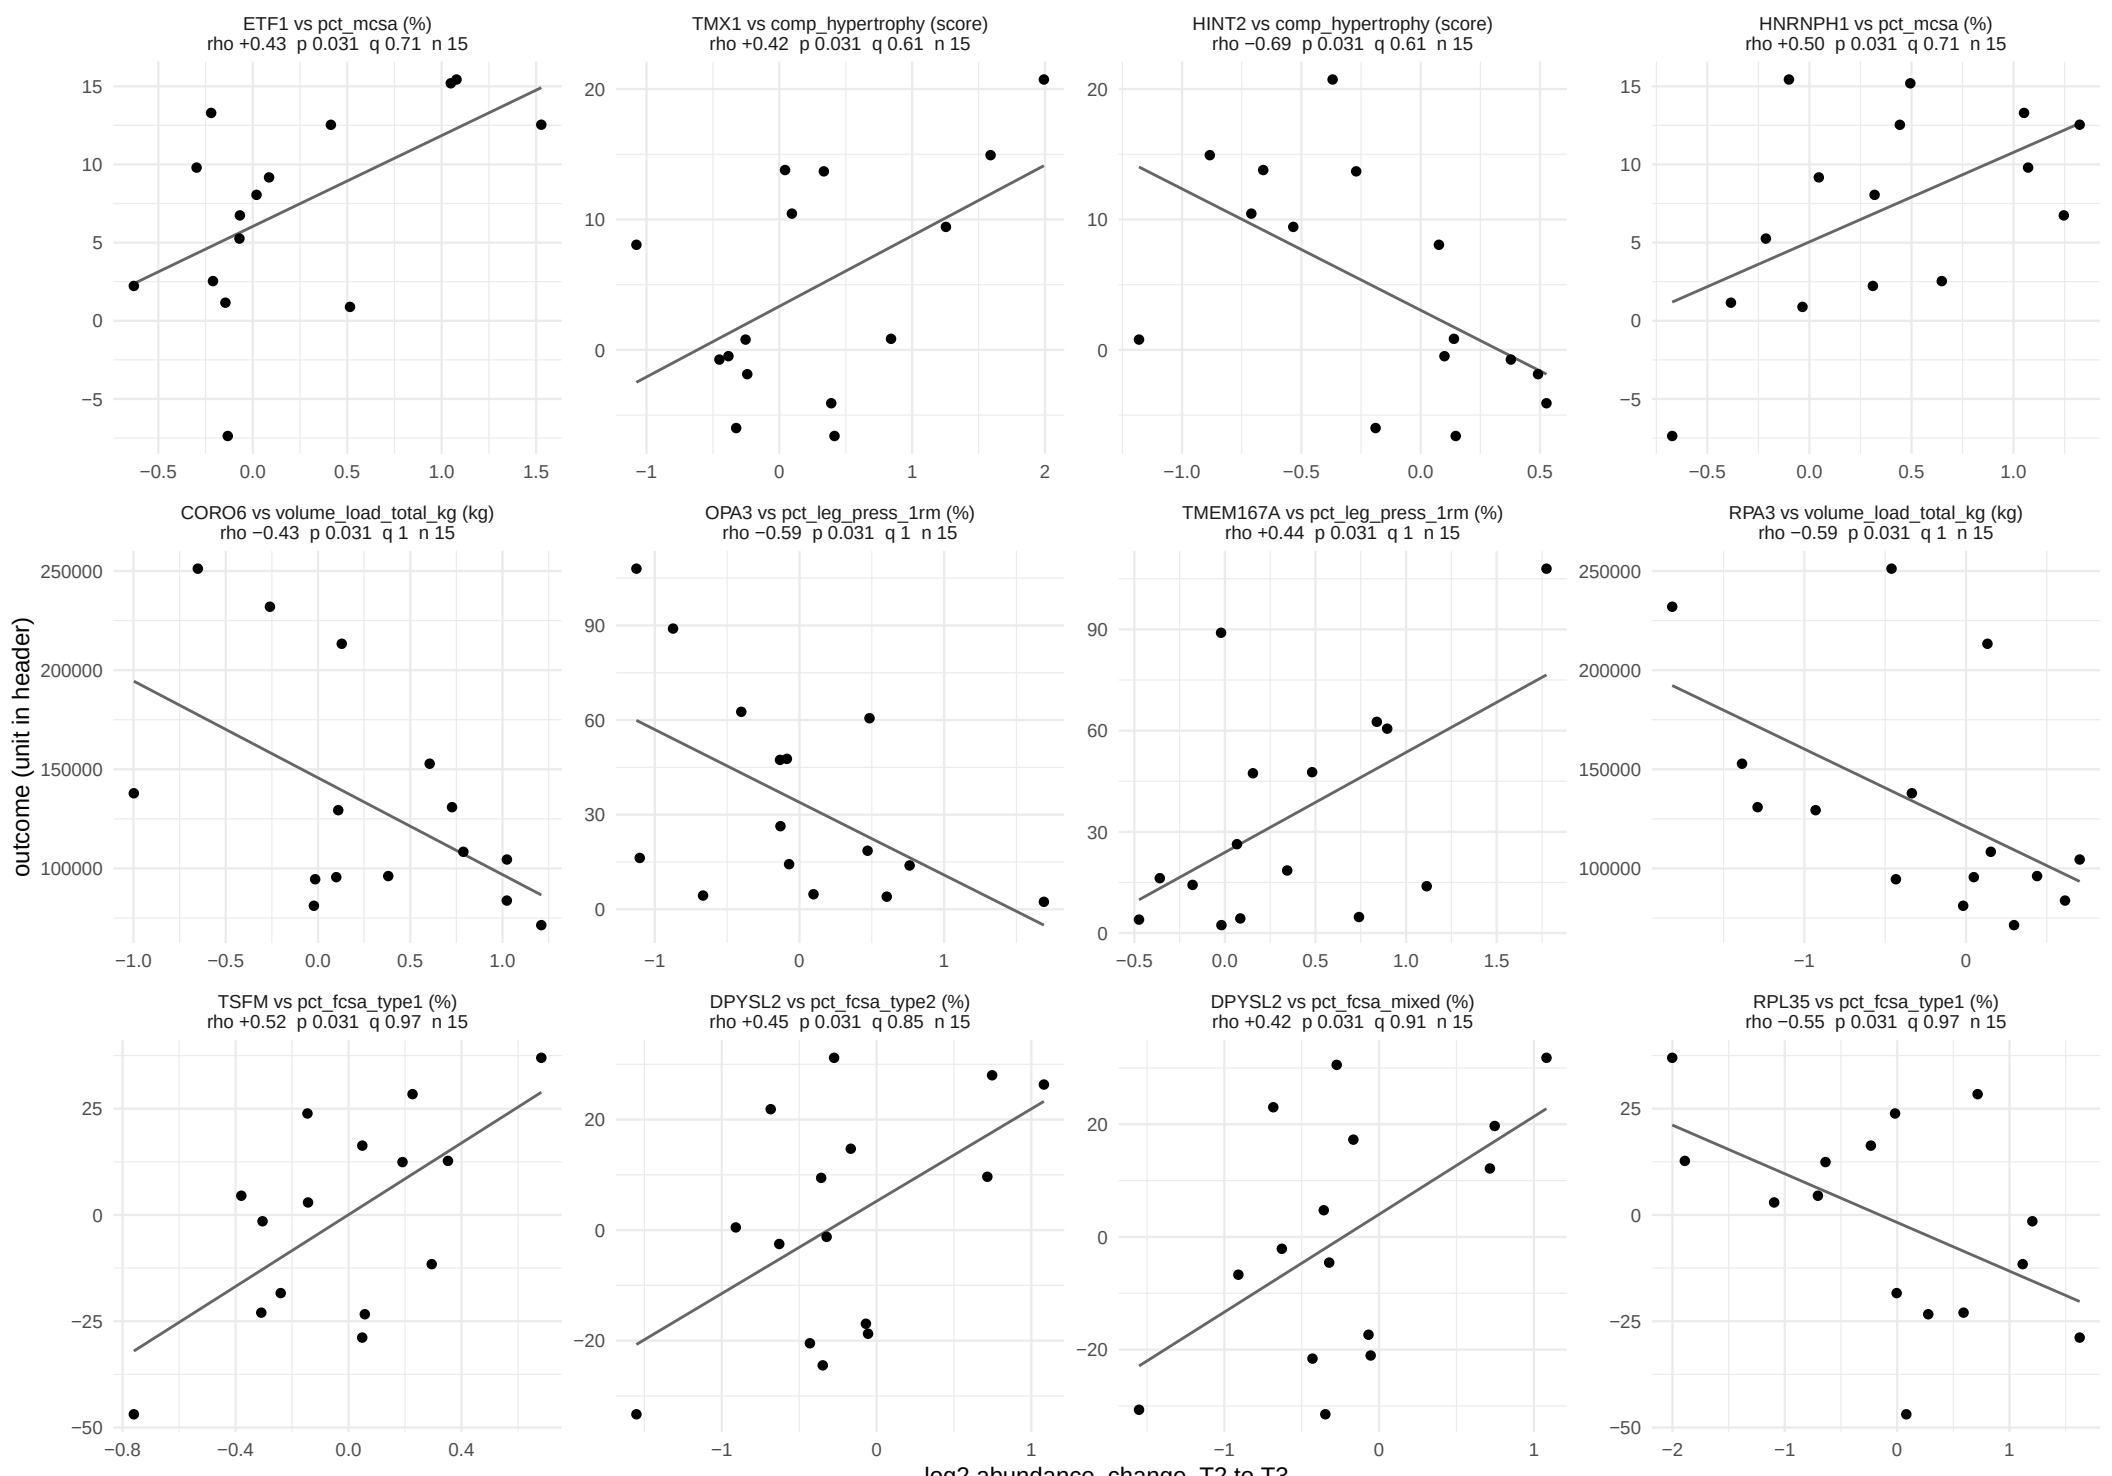

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, acute window


629 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 32 of 53.

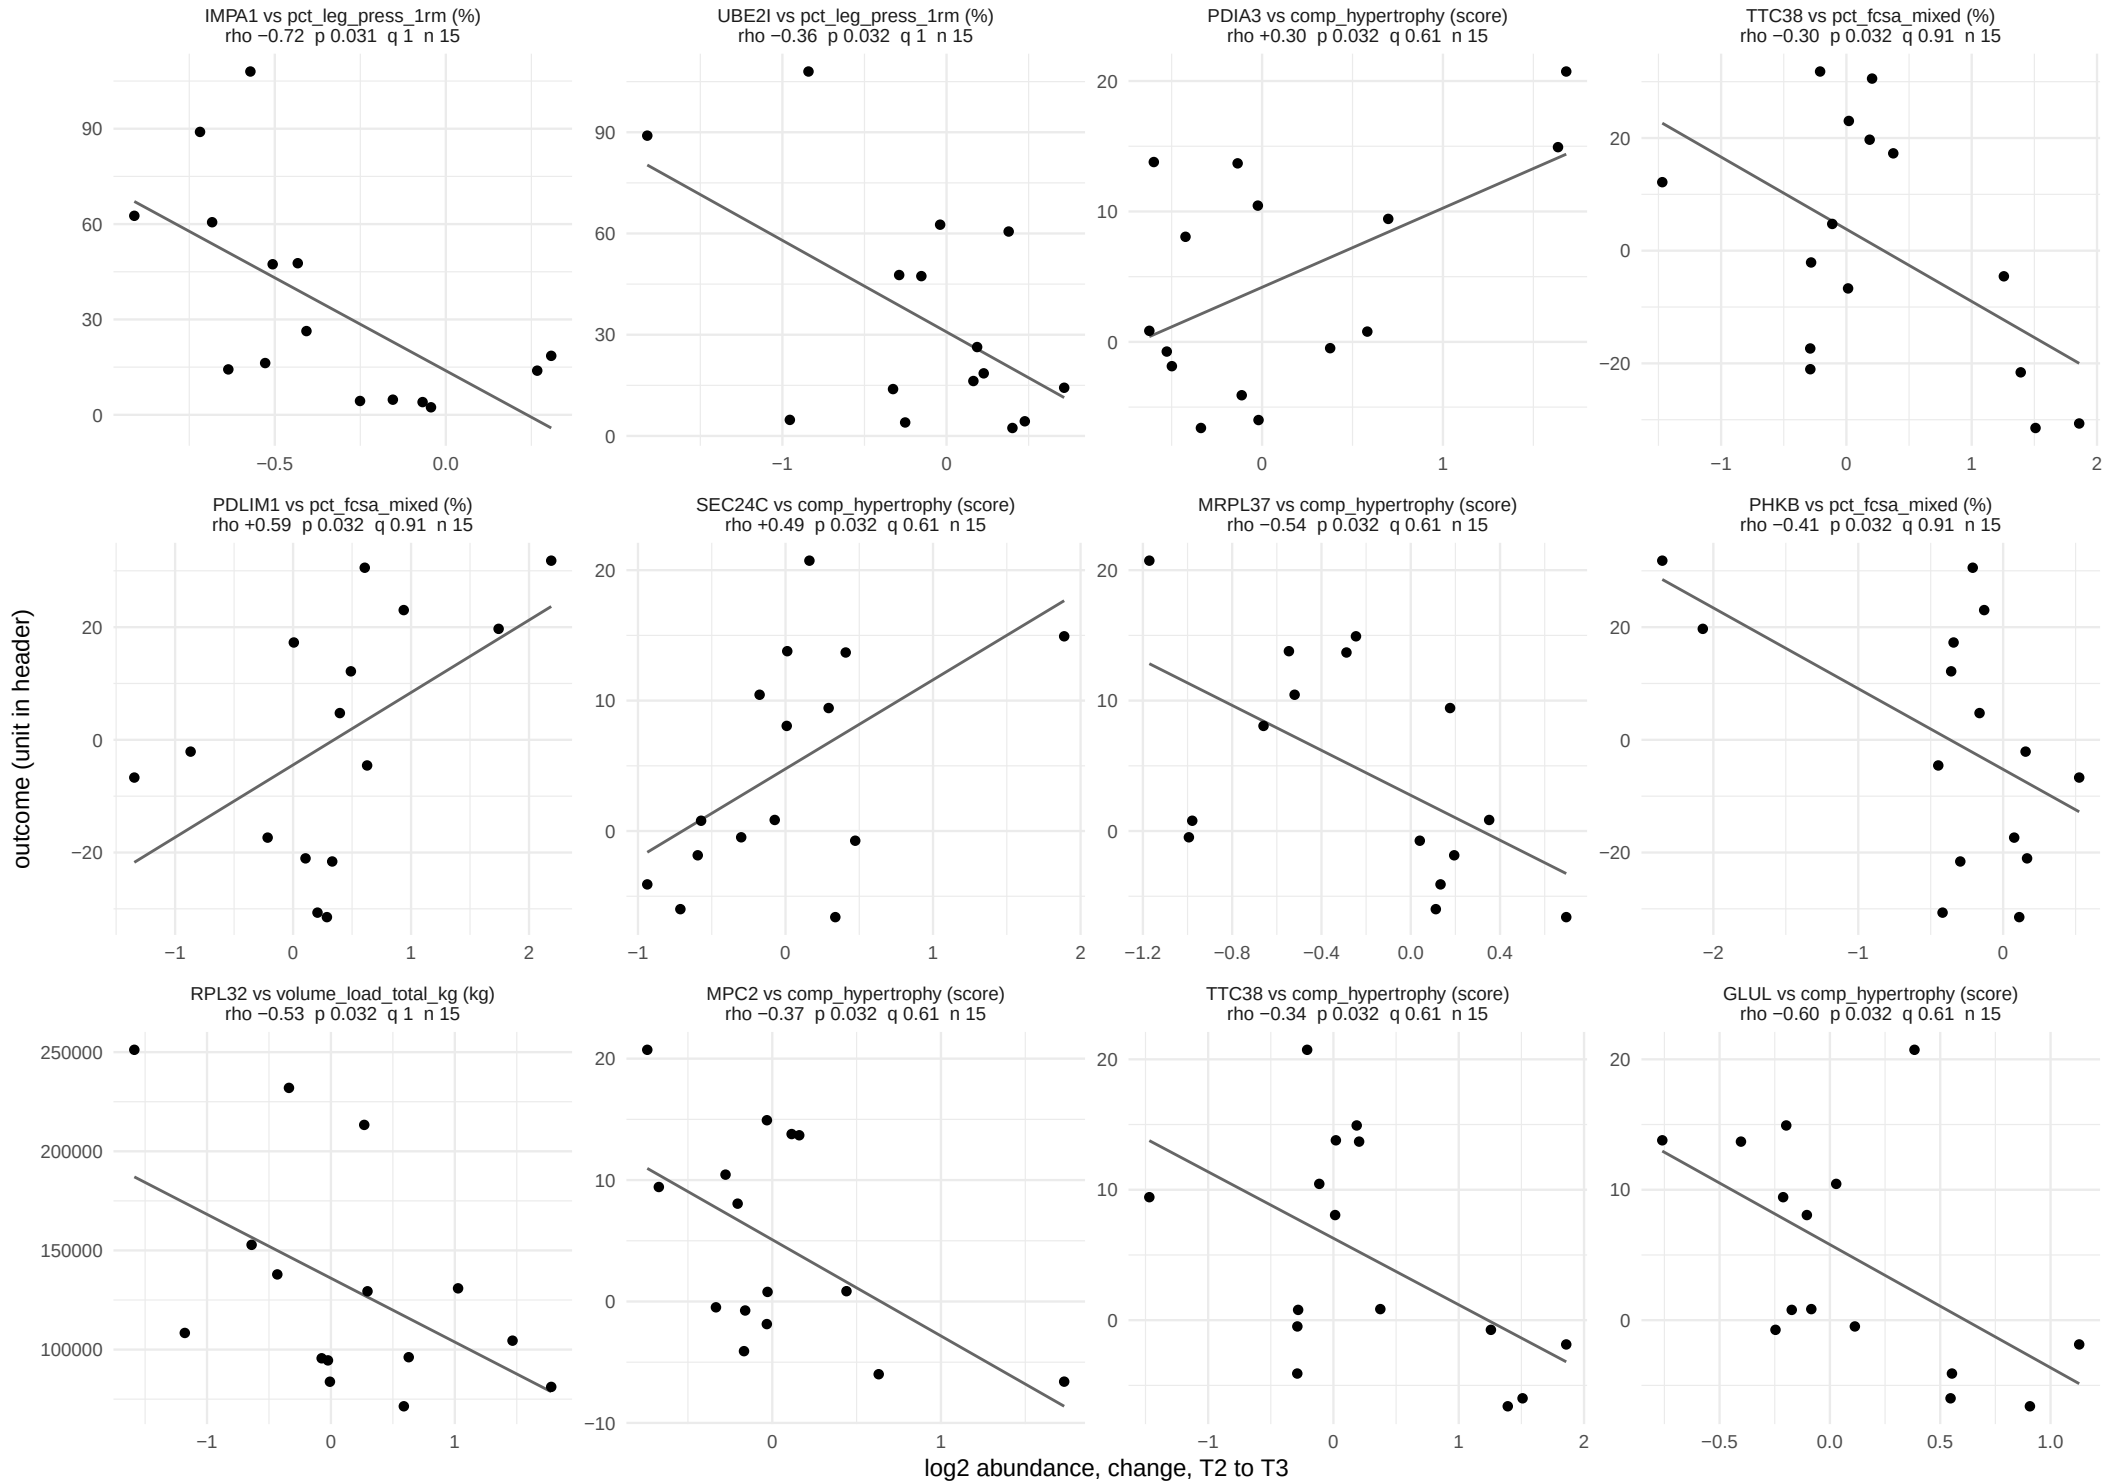

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, acute window


629 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 33 of 53.

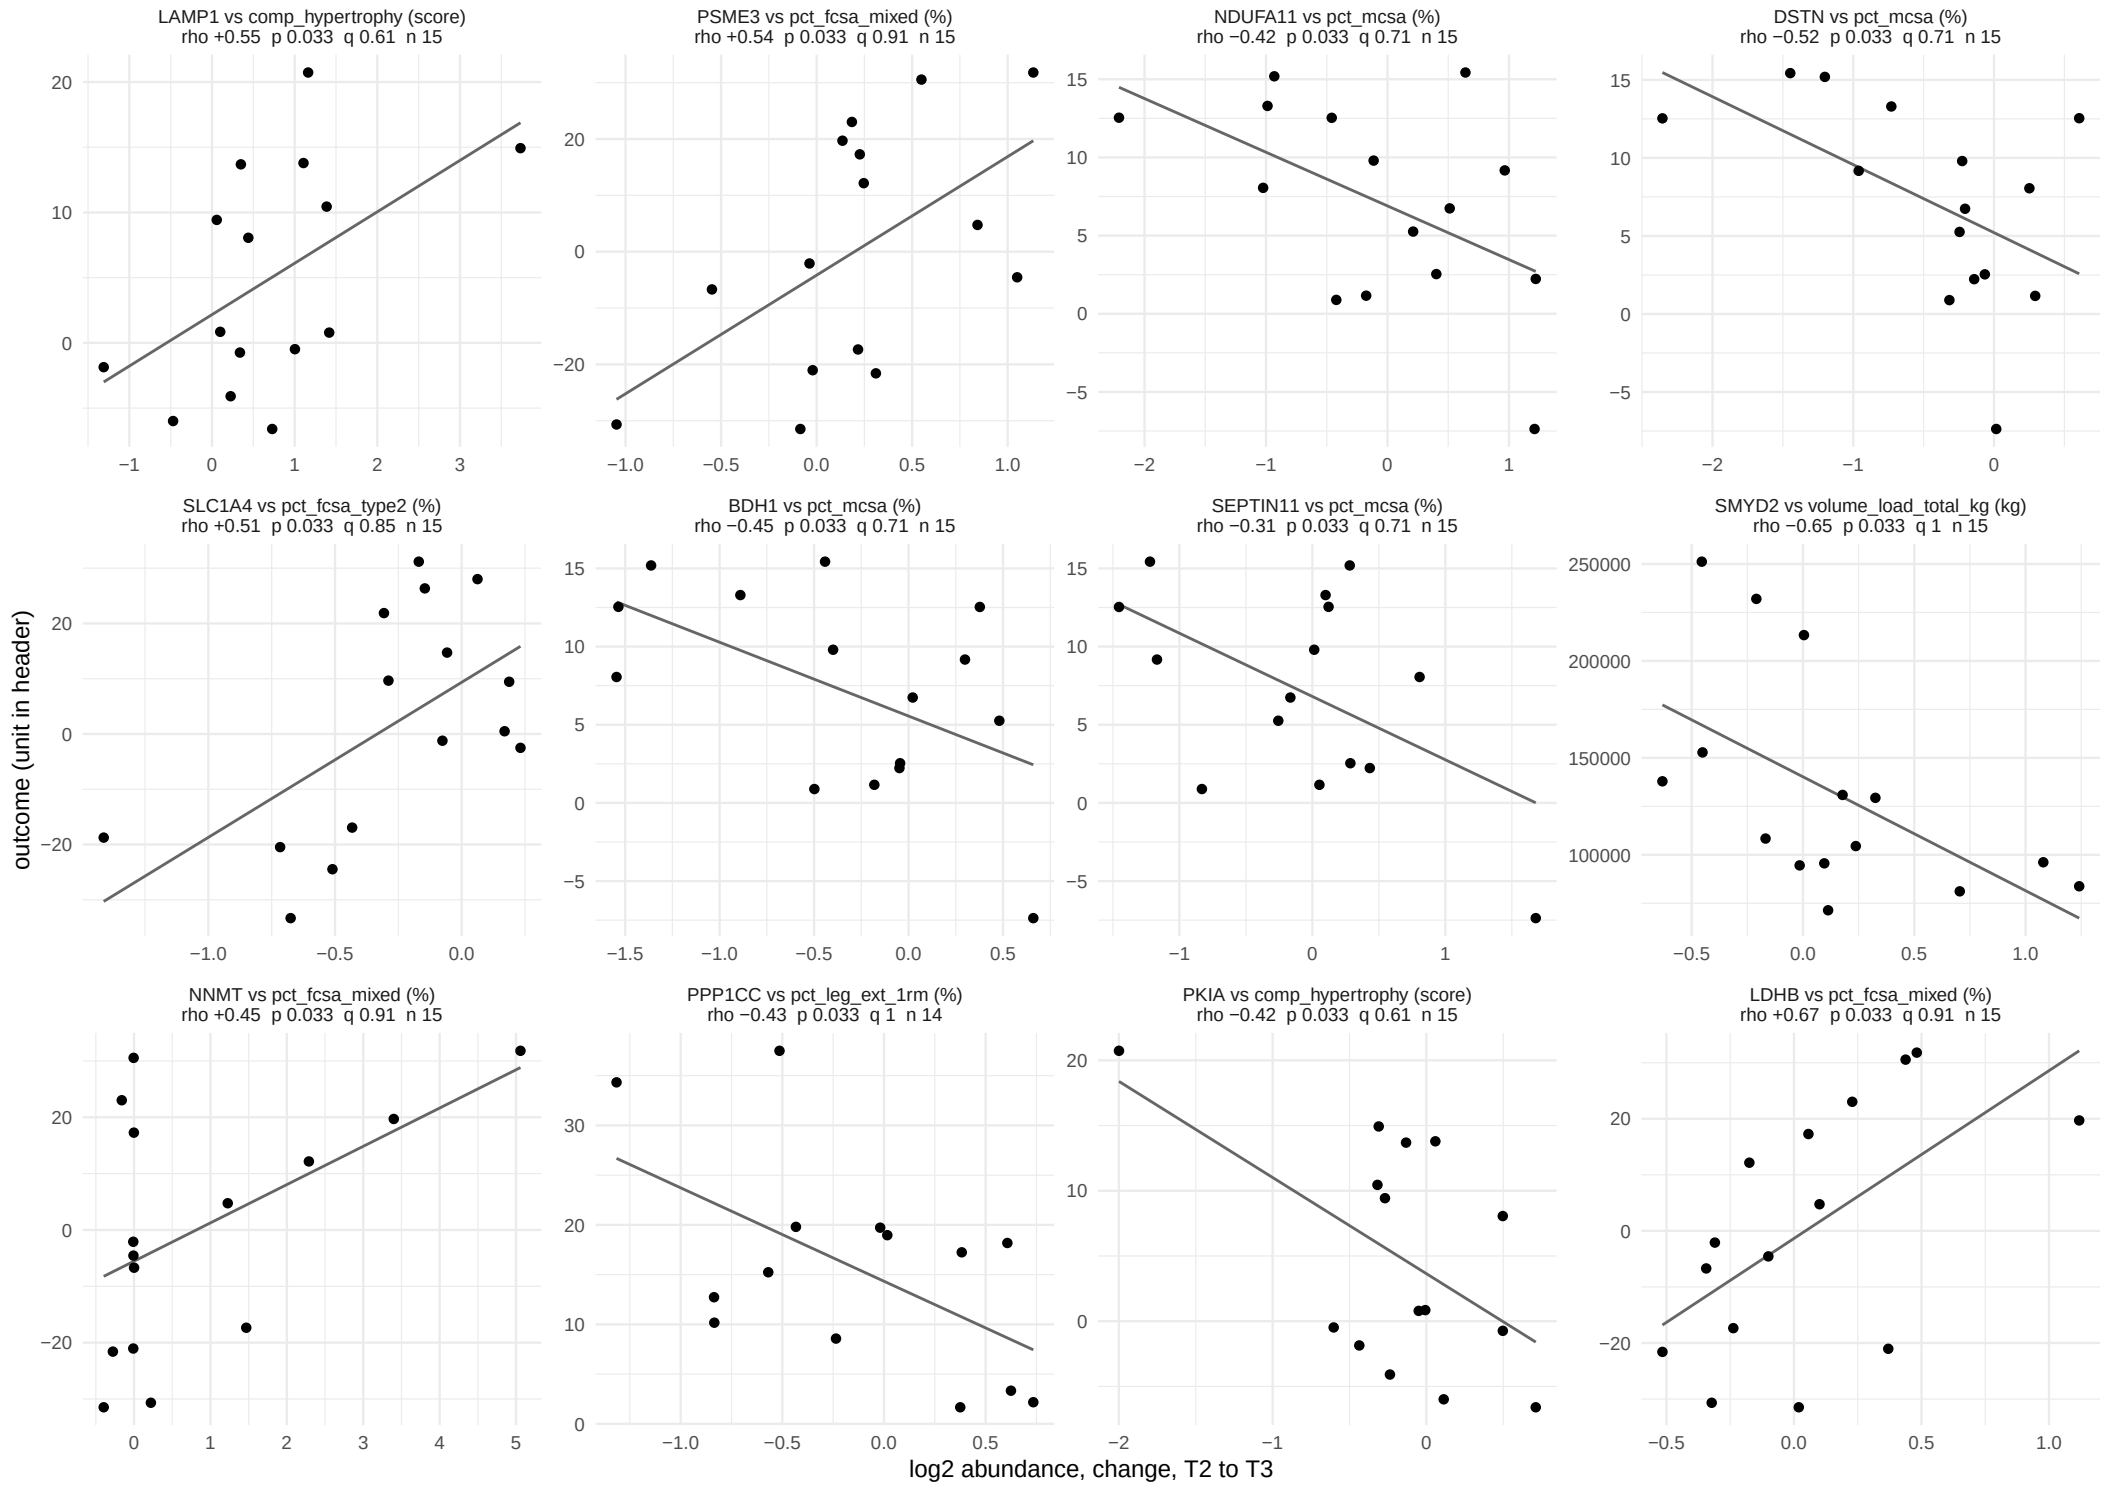

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, acute window


629 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 34 of 53.

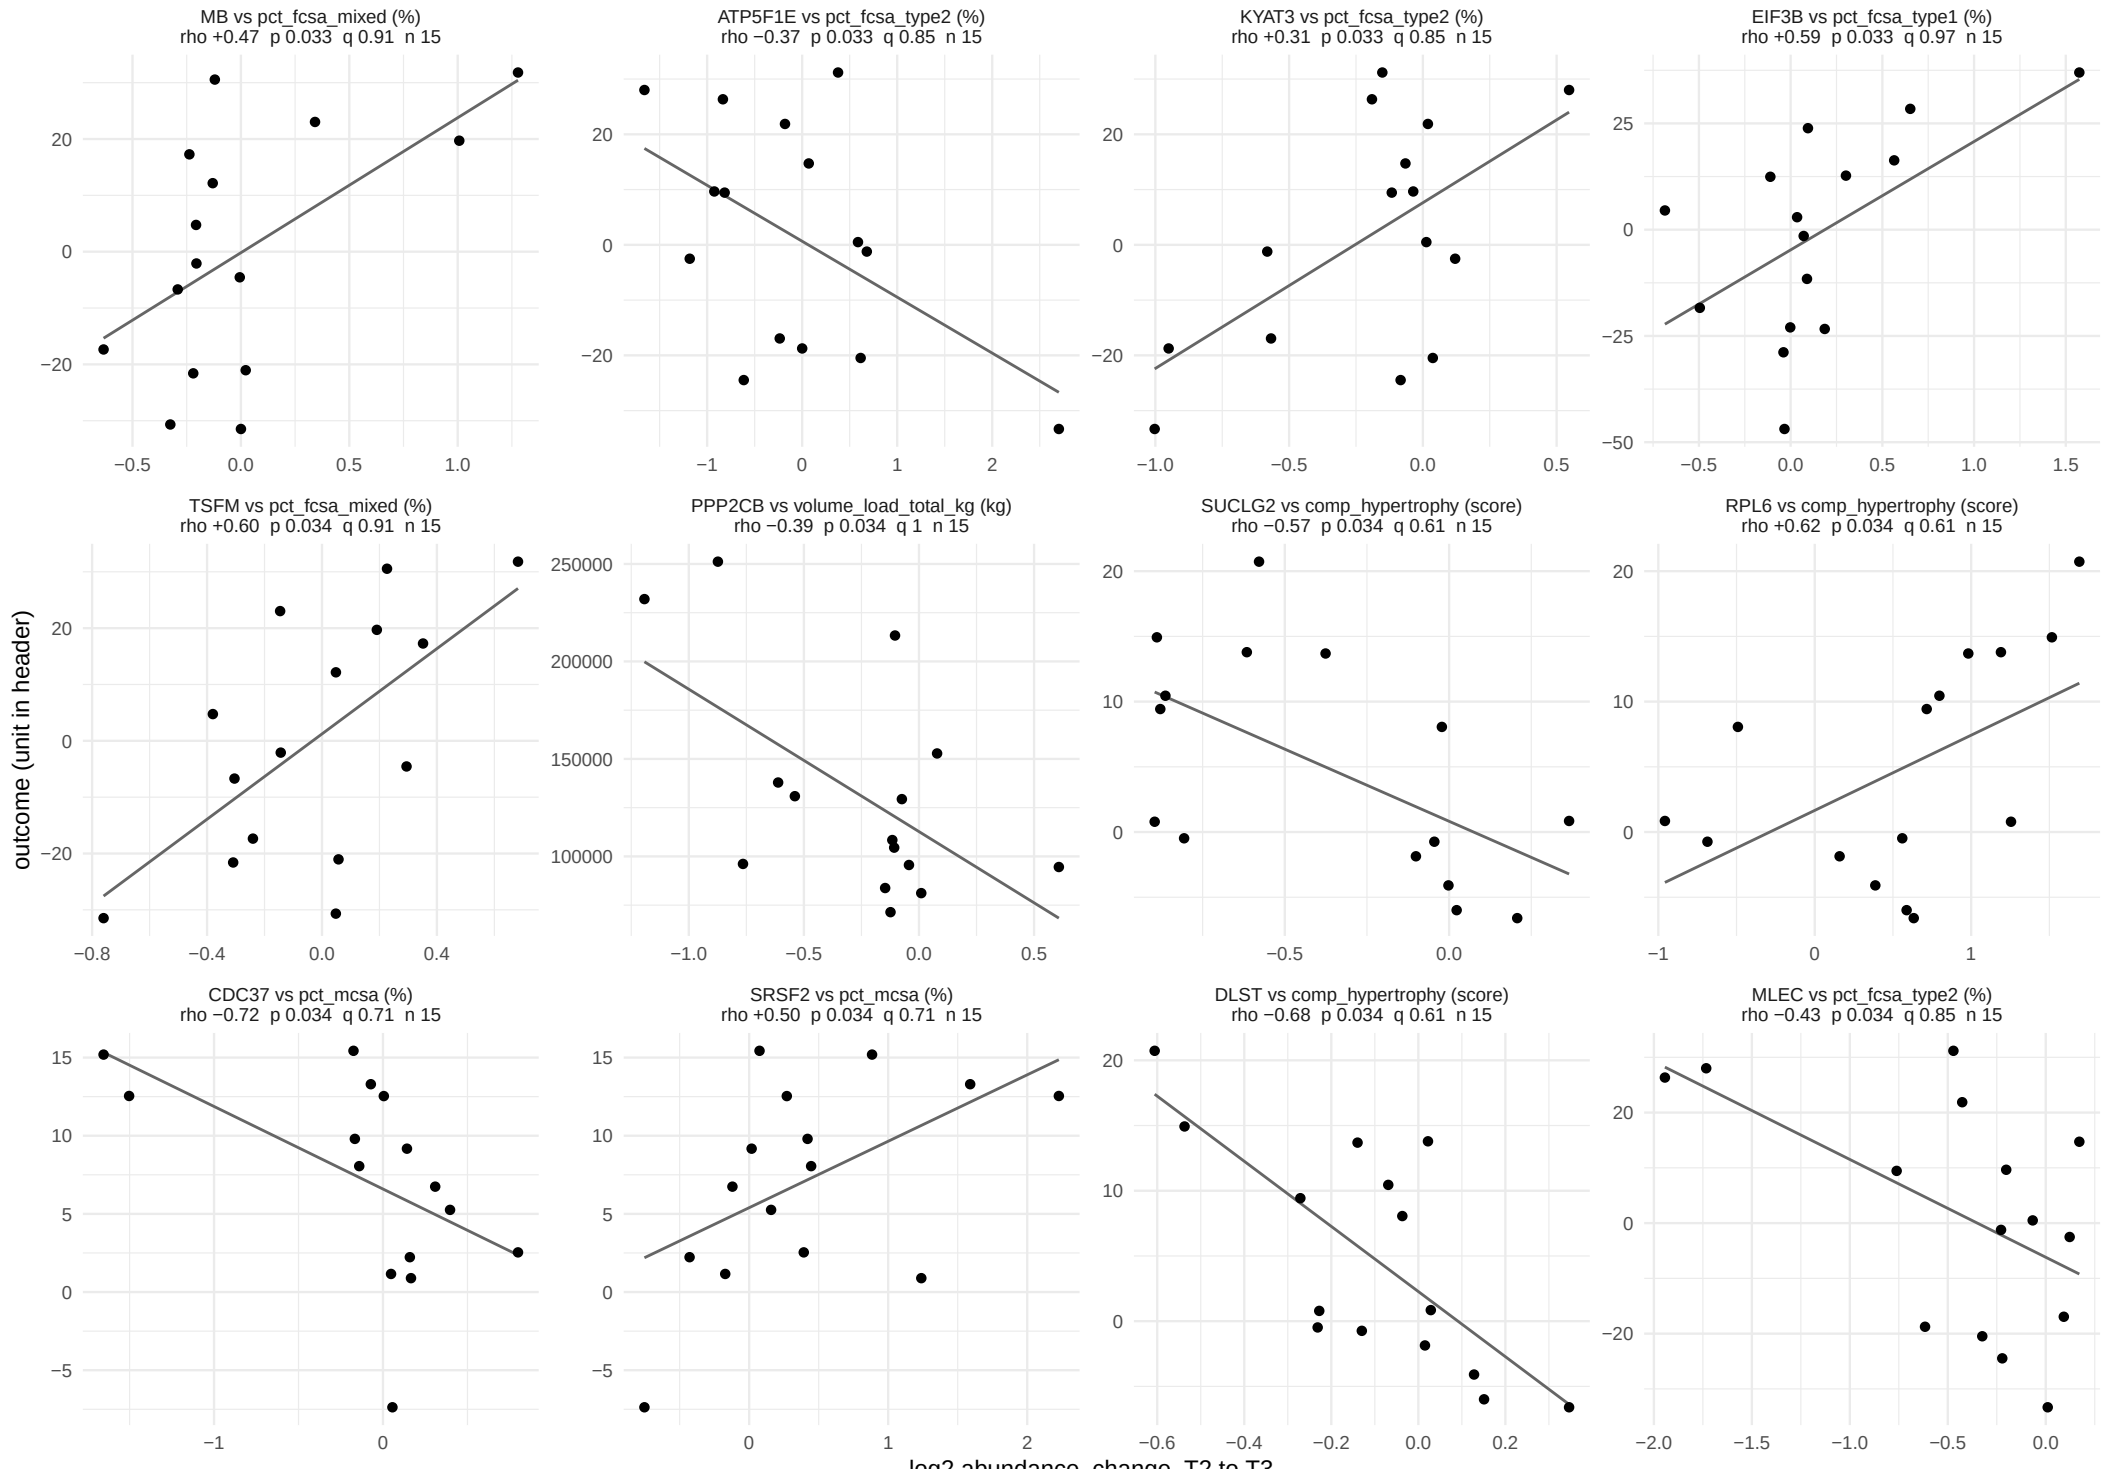

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, acute window


629 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 35 of 53.

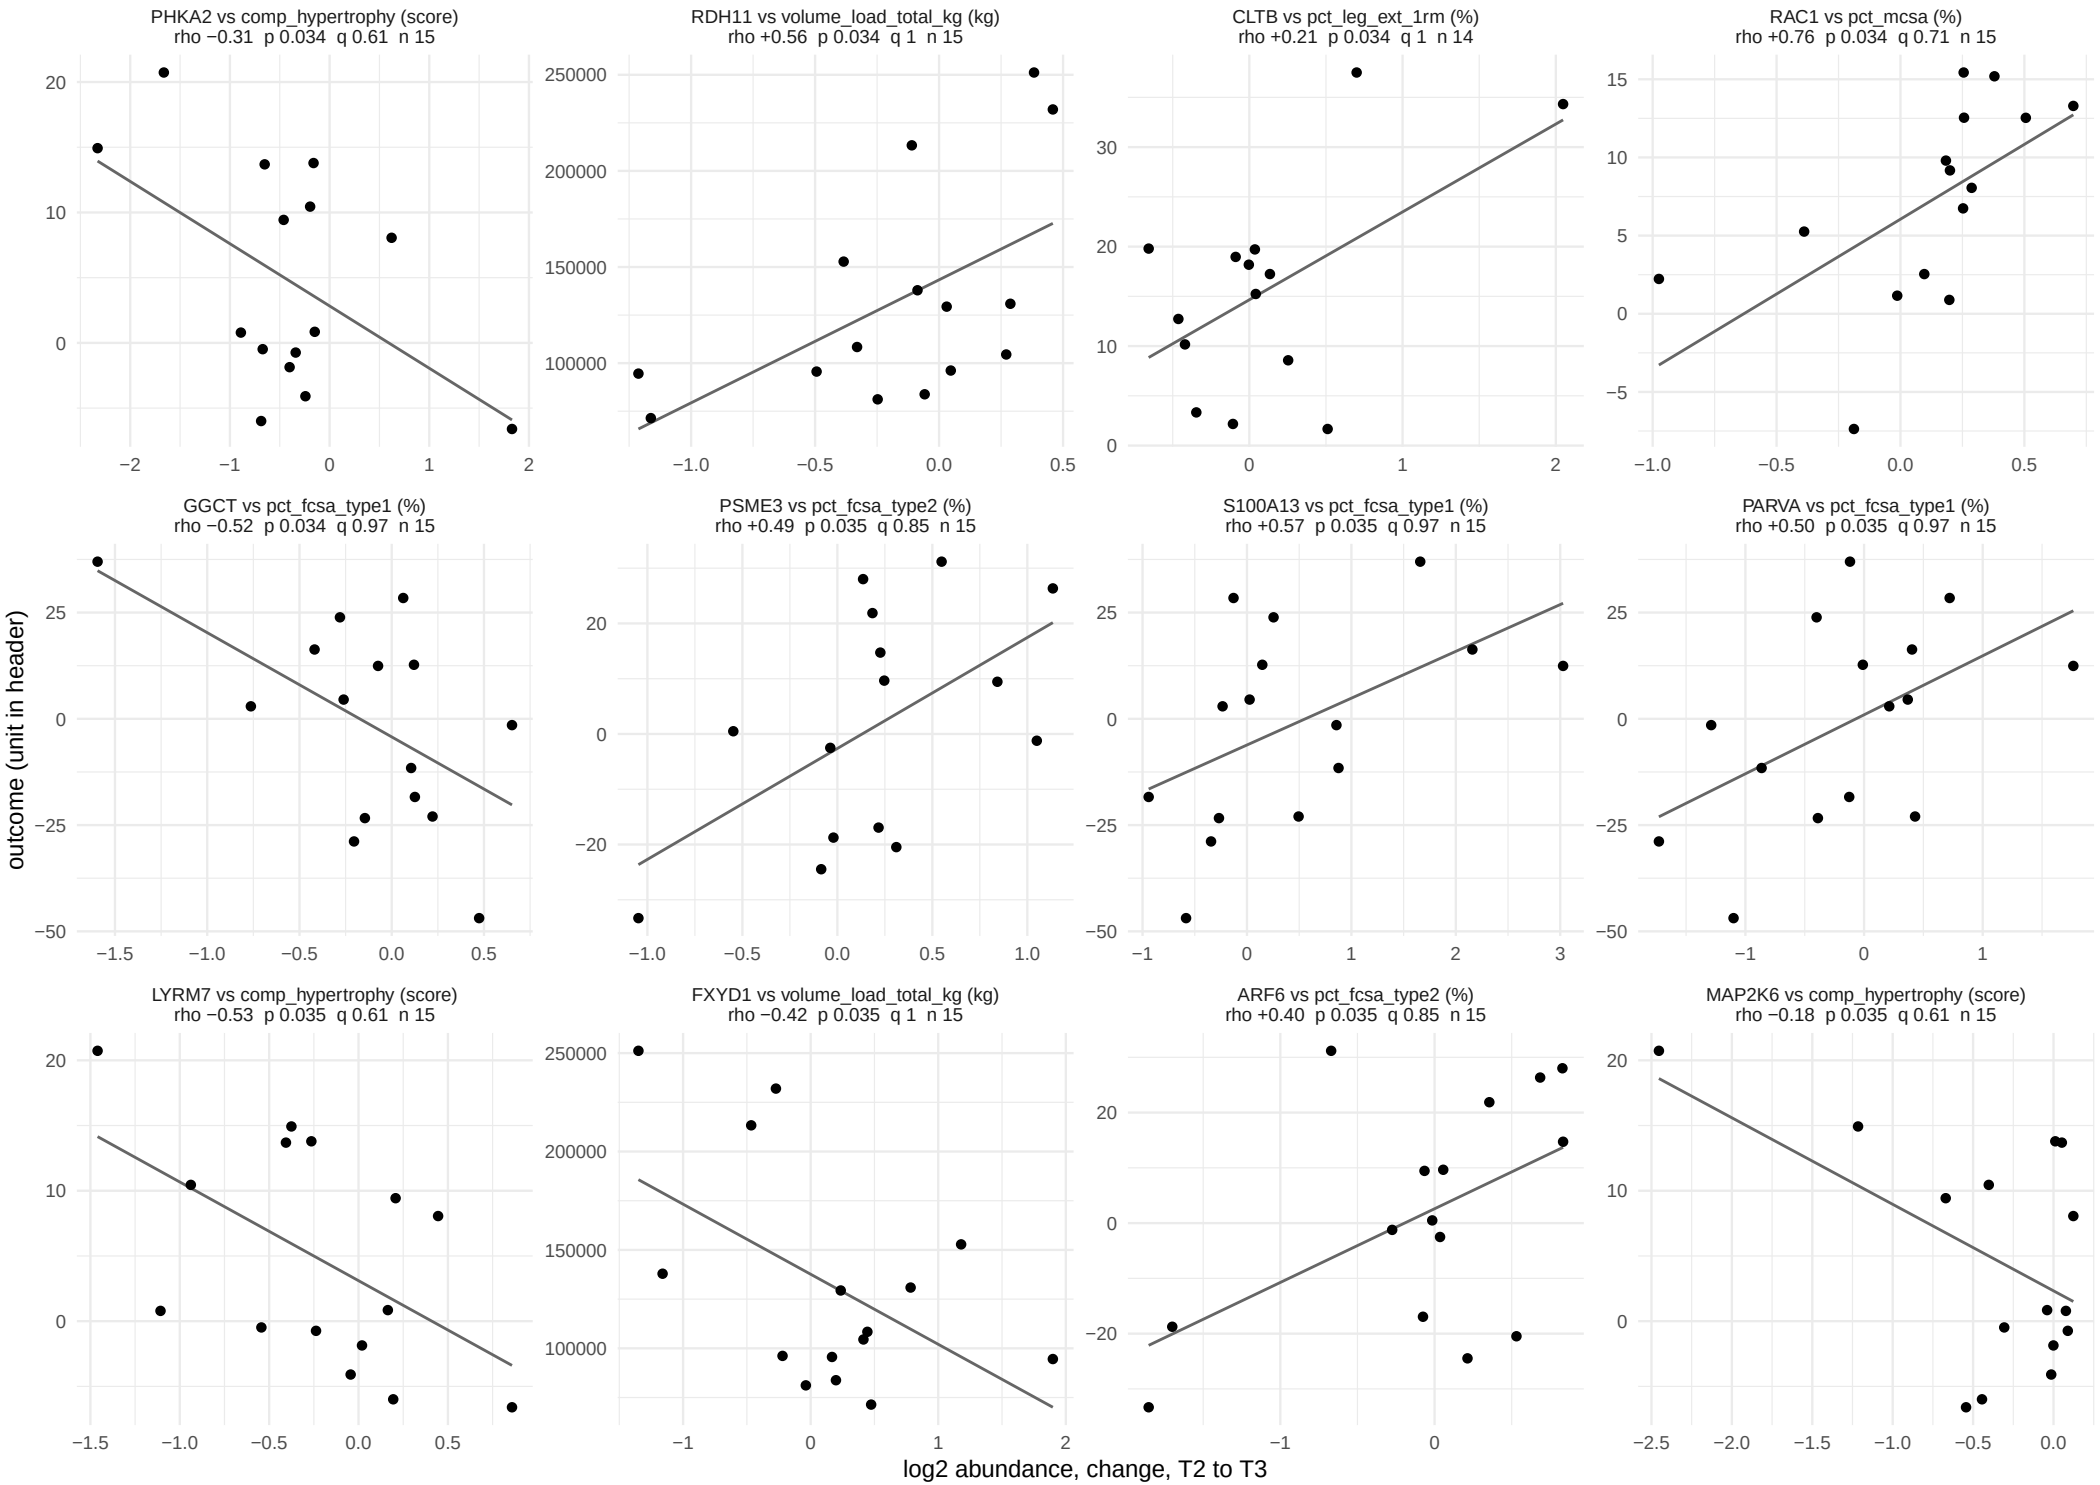

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, acute window


629 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 36 of 53.

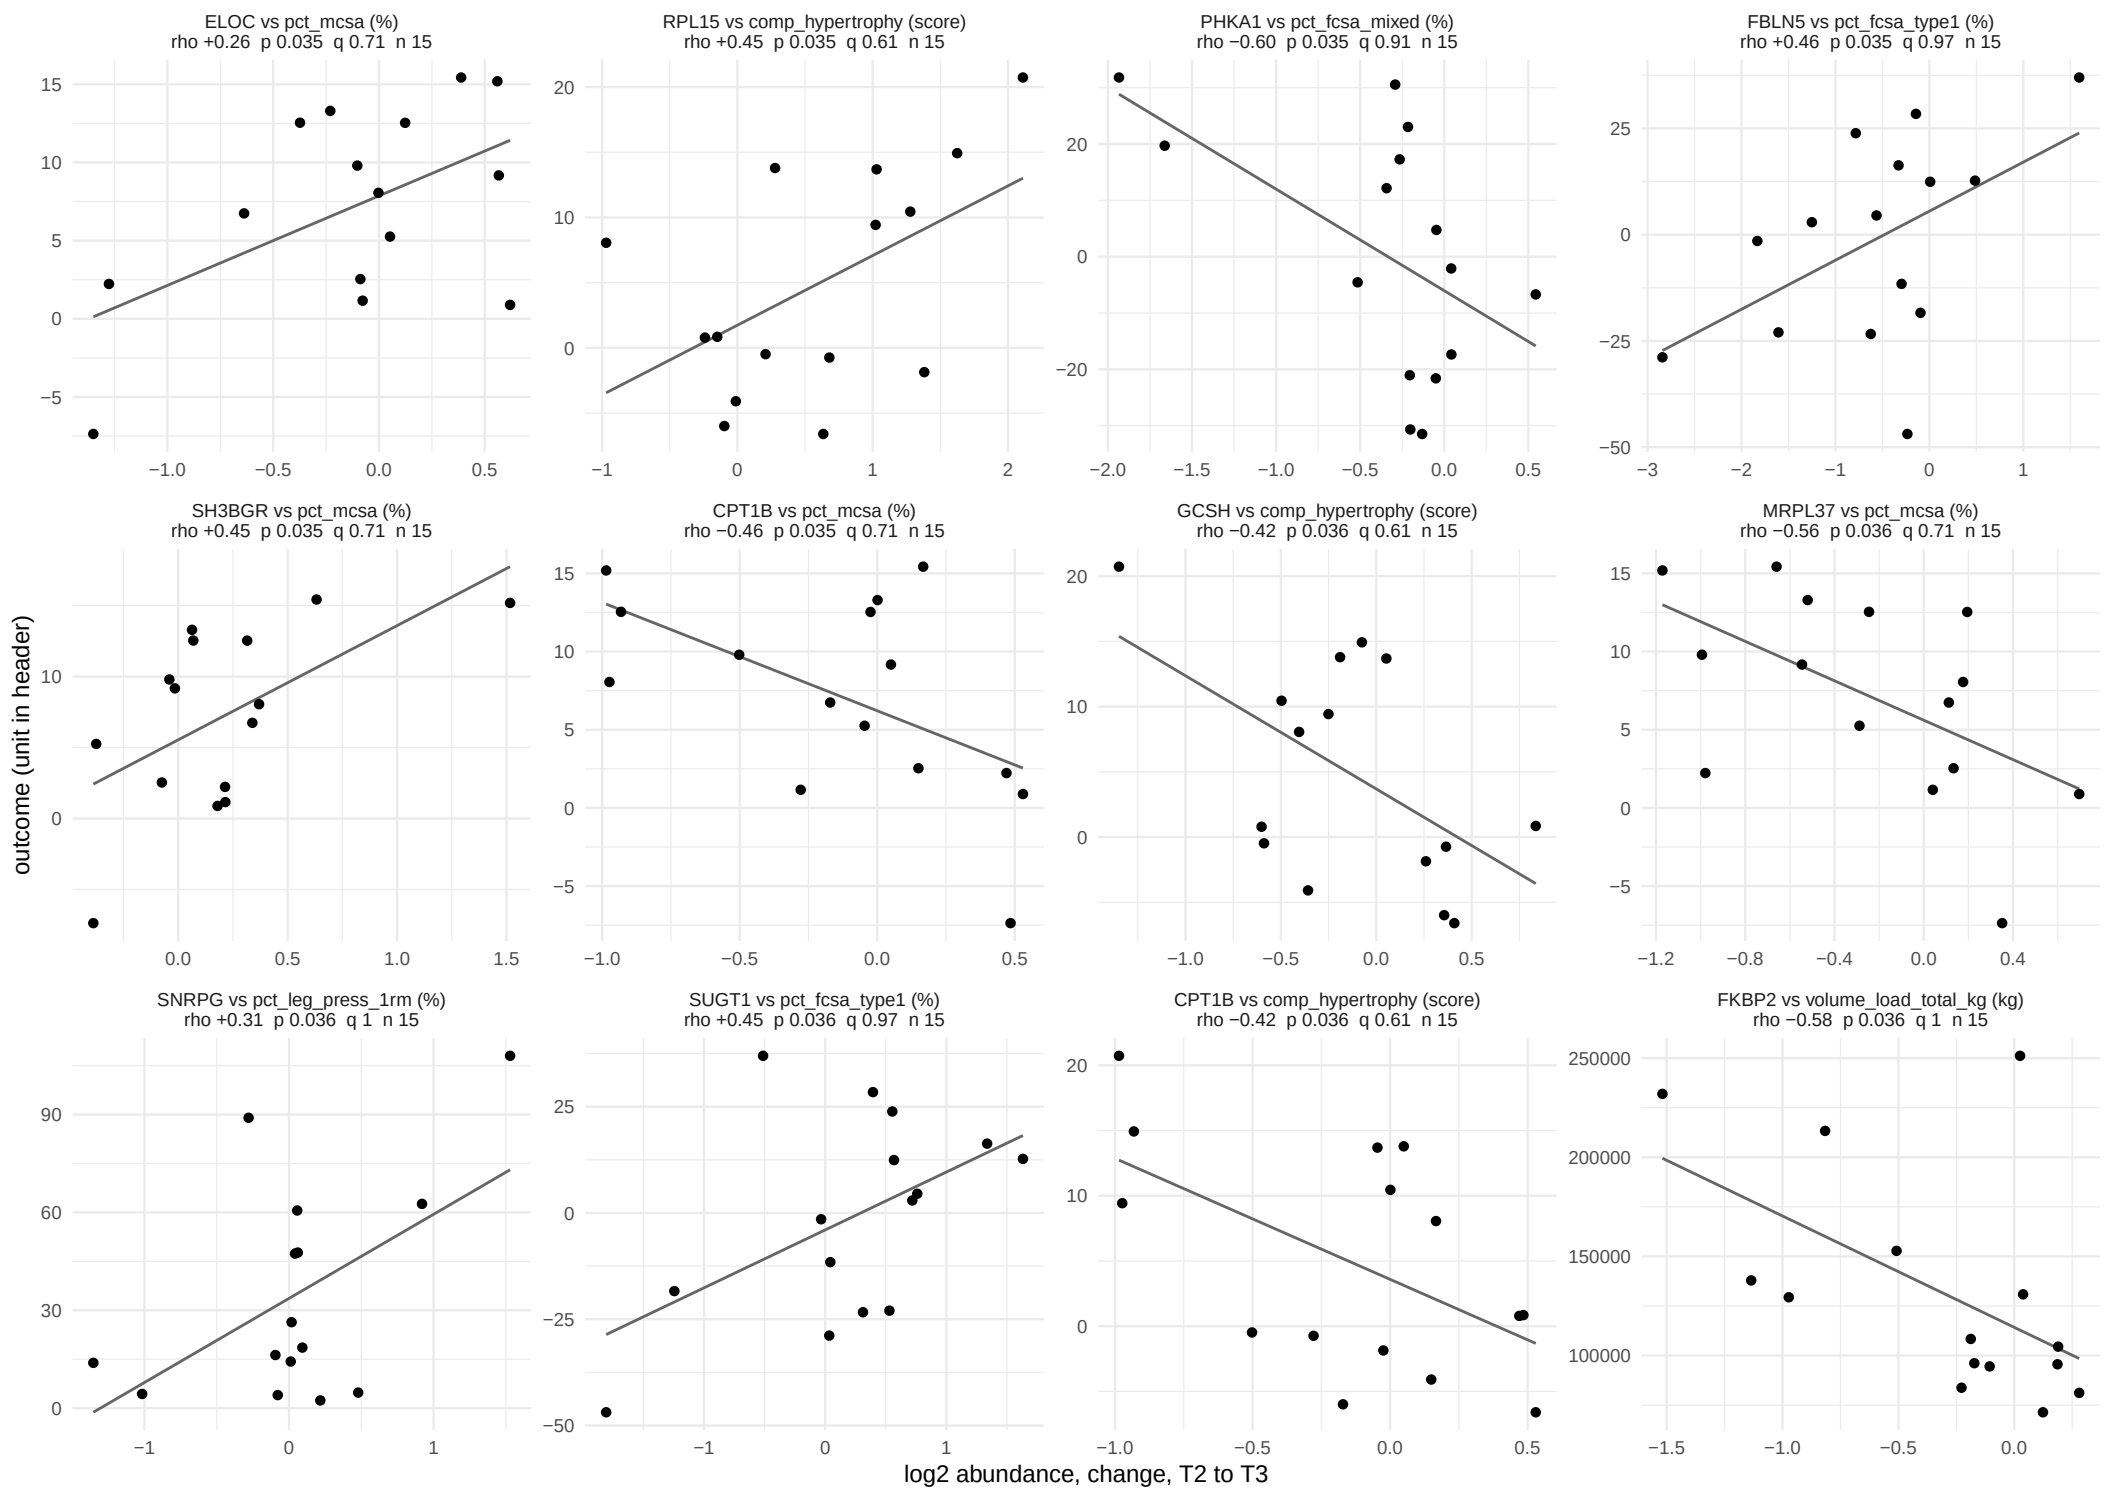

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, acute window


629 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 37 of 53.

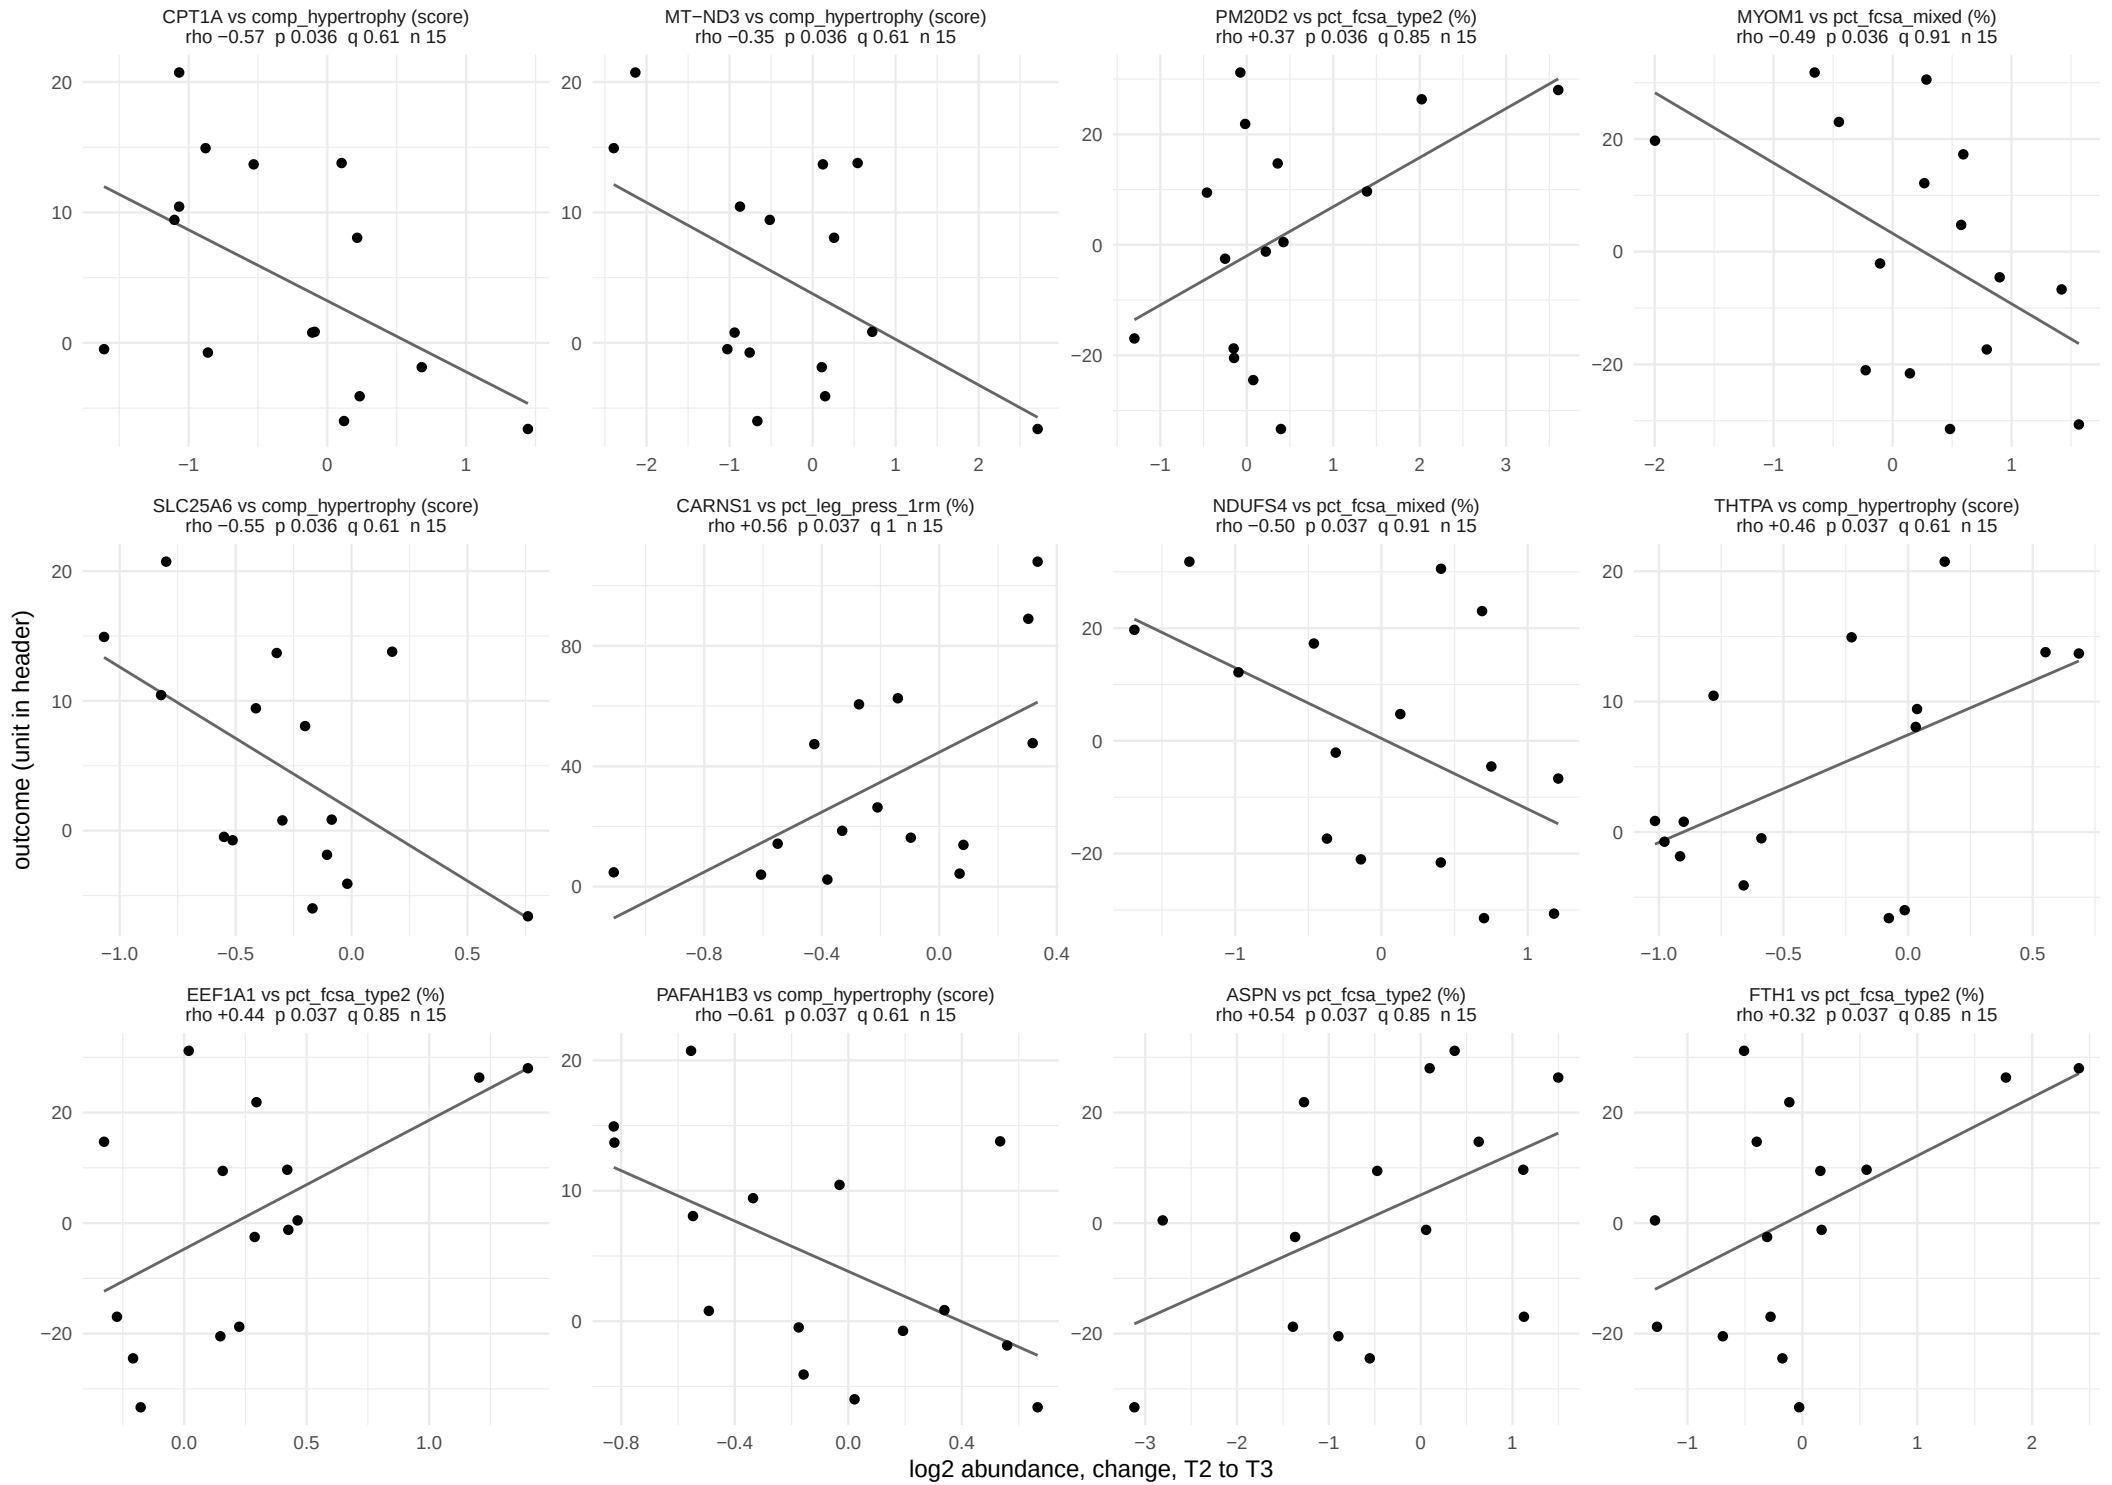

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, acute window


629 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 38 of 53.

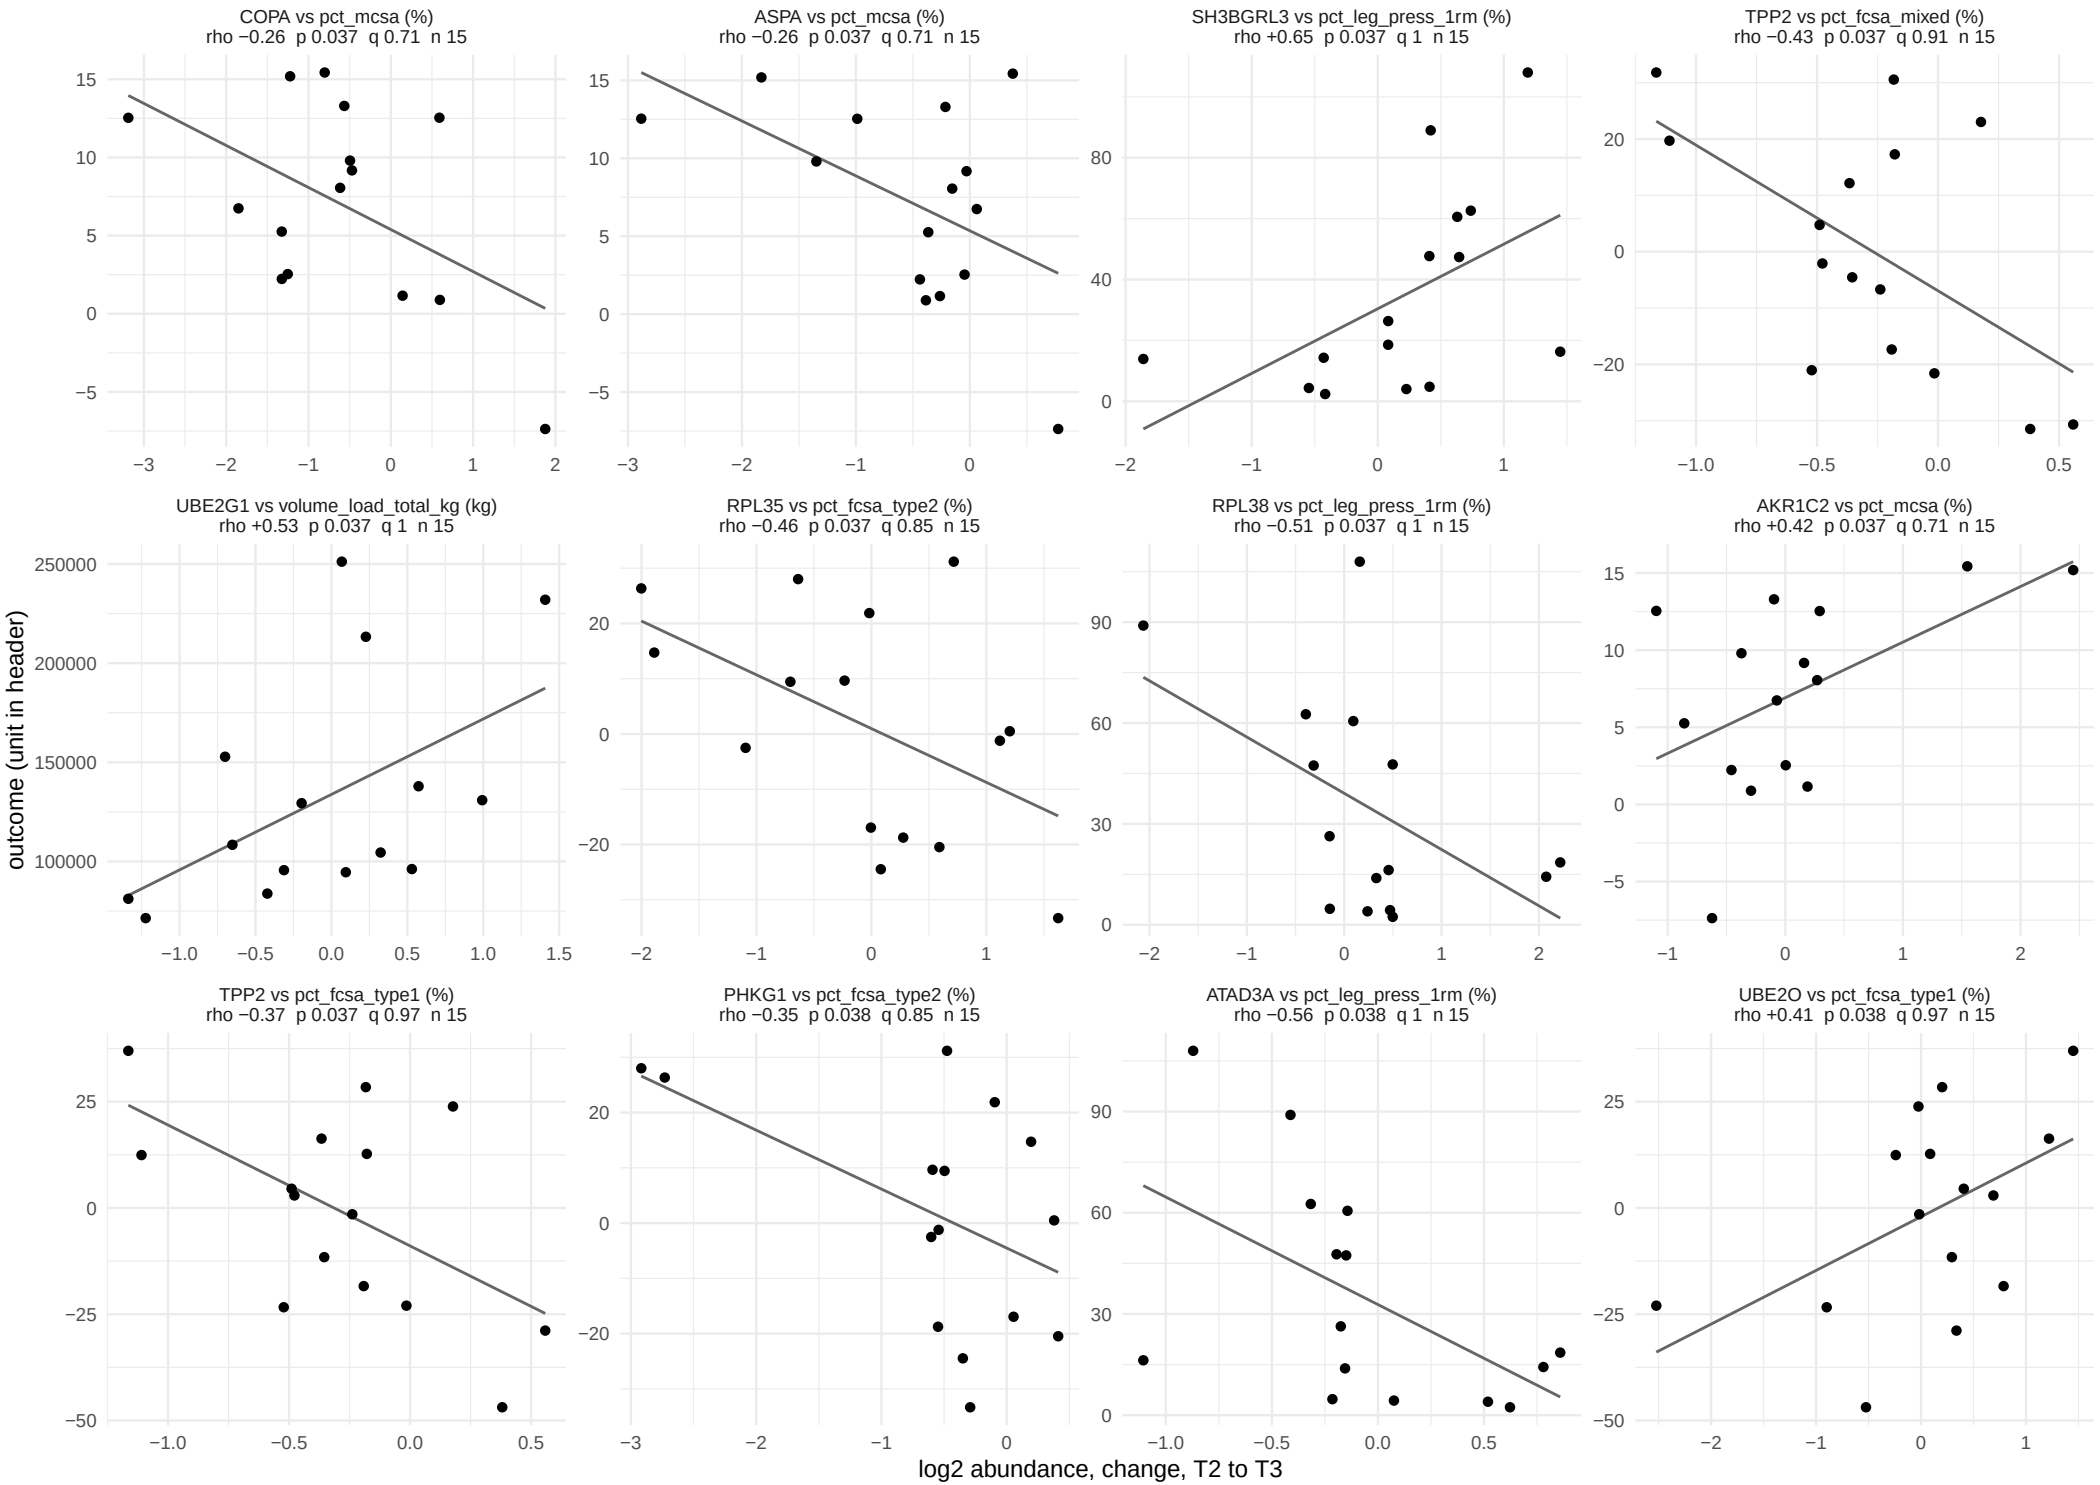

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, acute window


629 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 39 of 53.

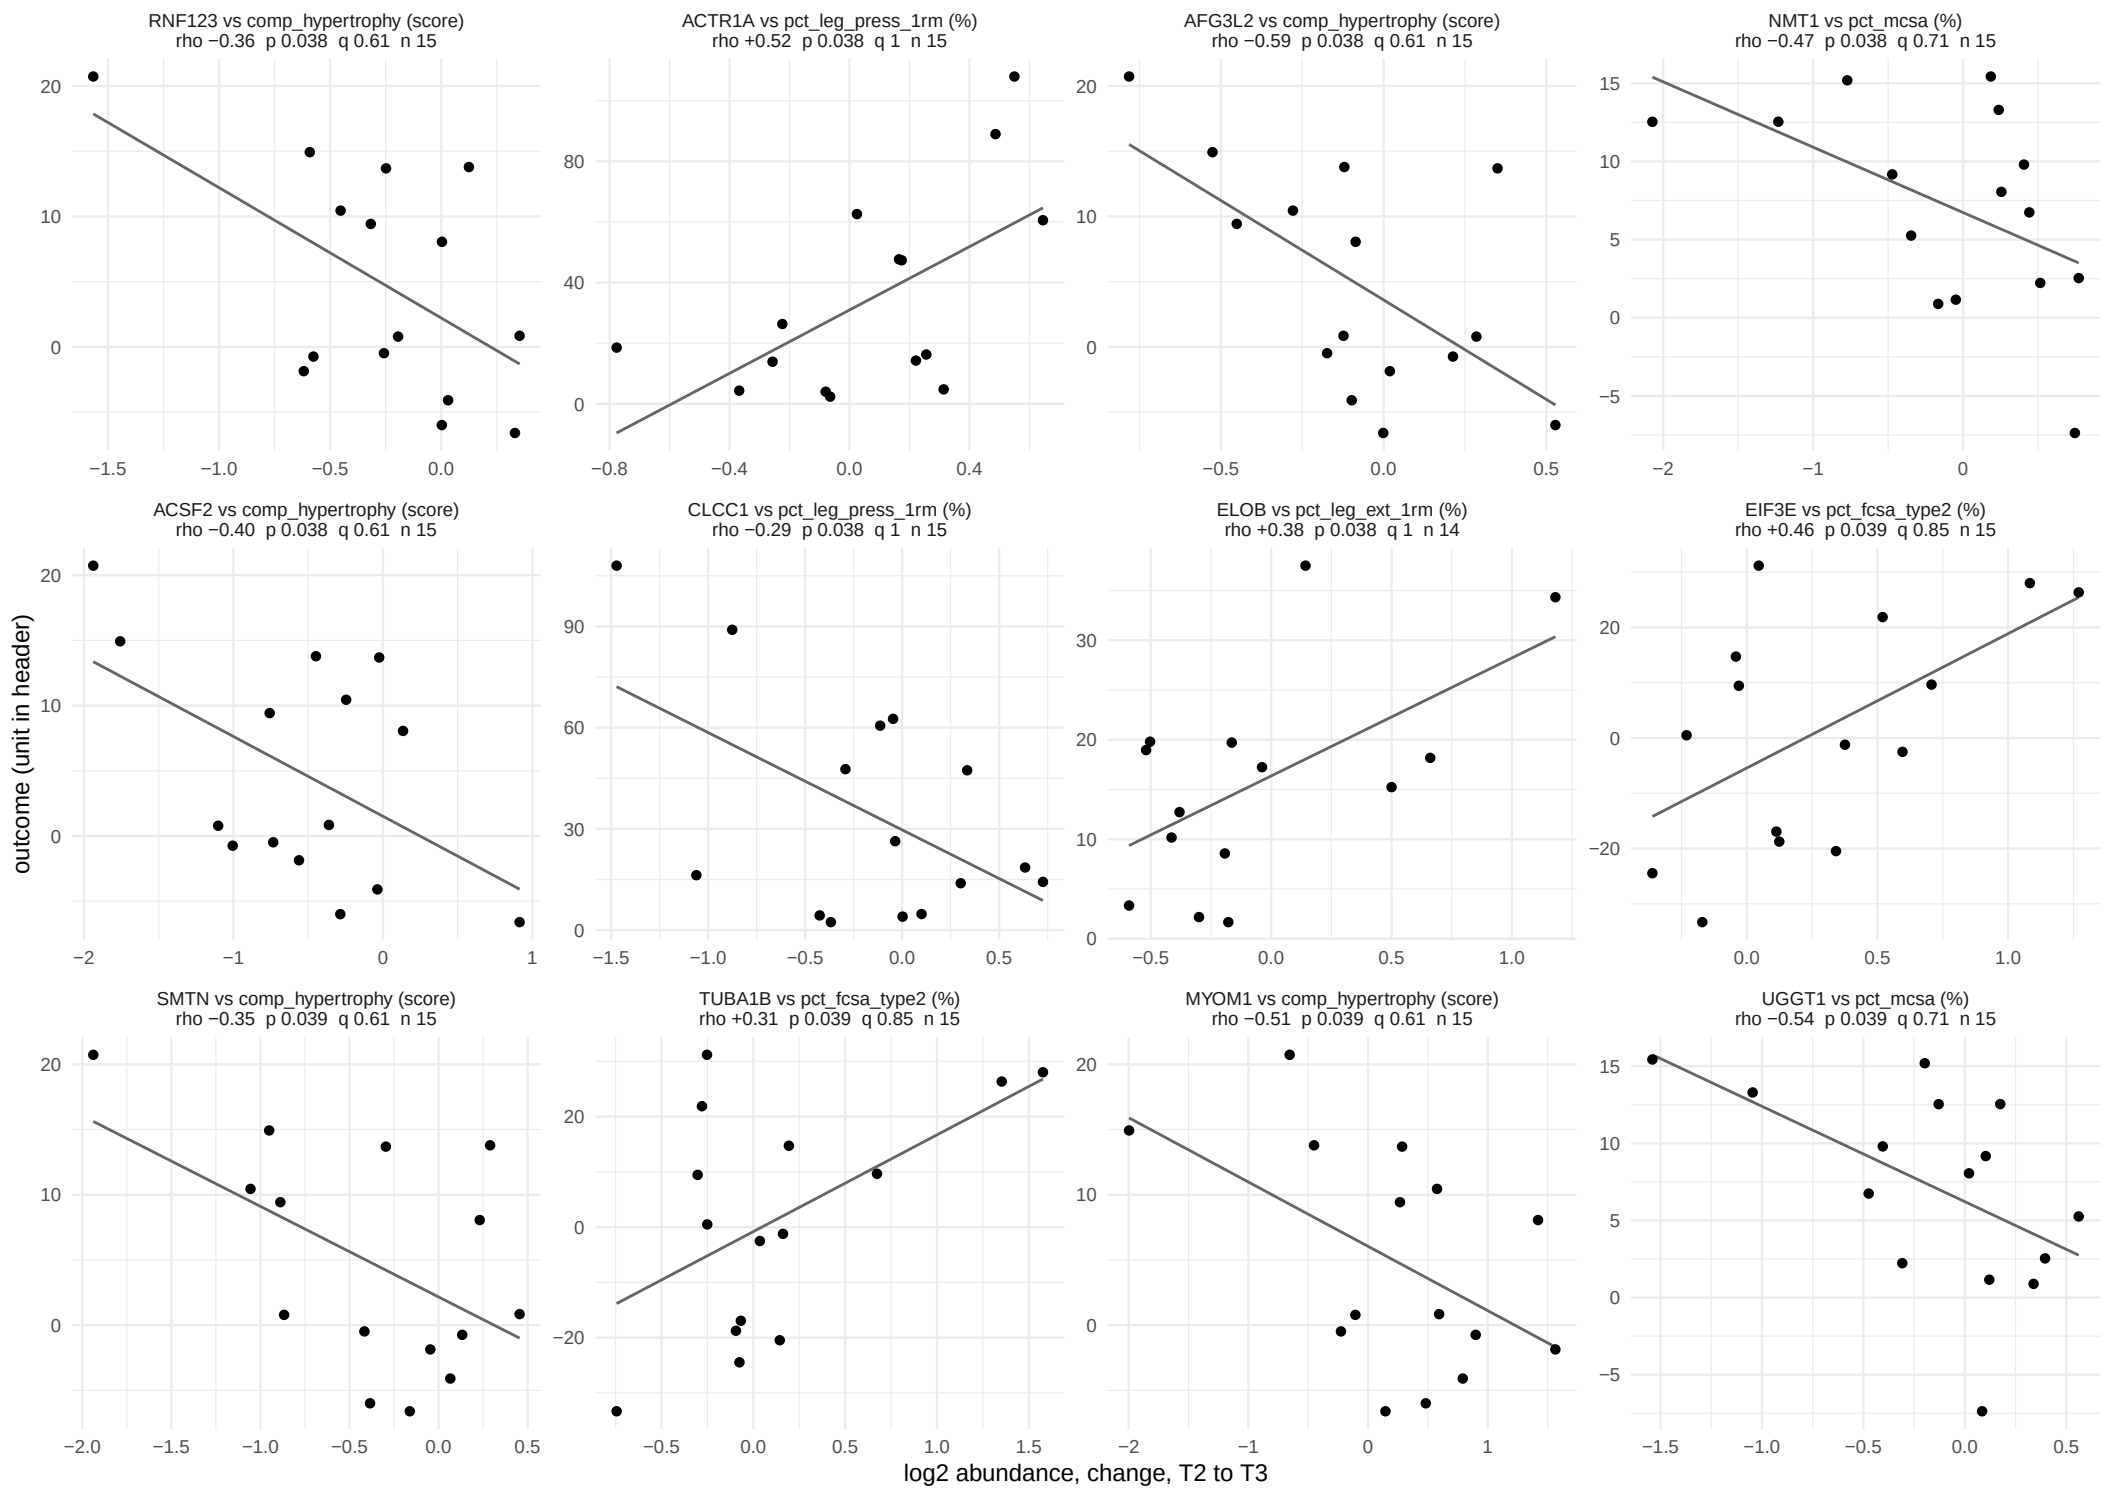

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, acute window


629 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 40 of 53.

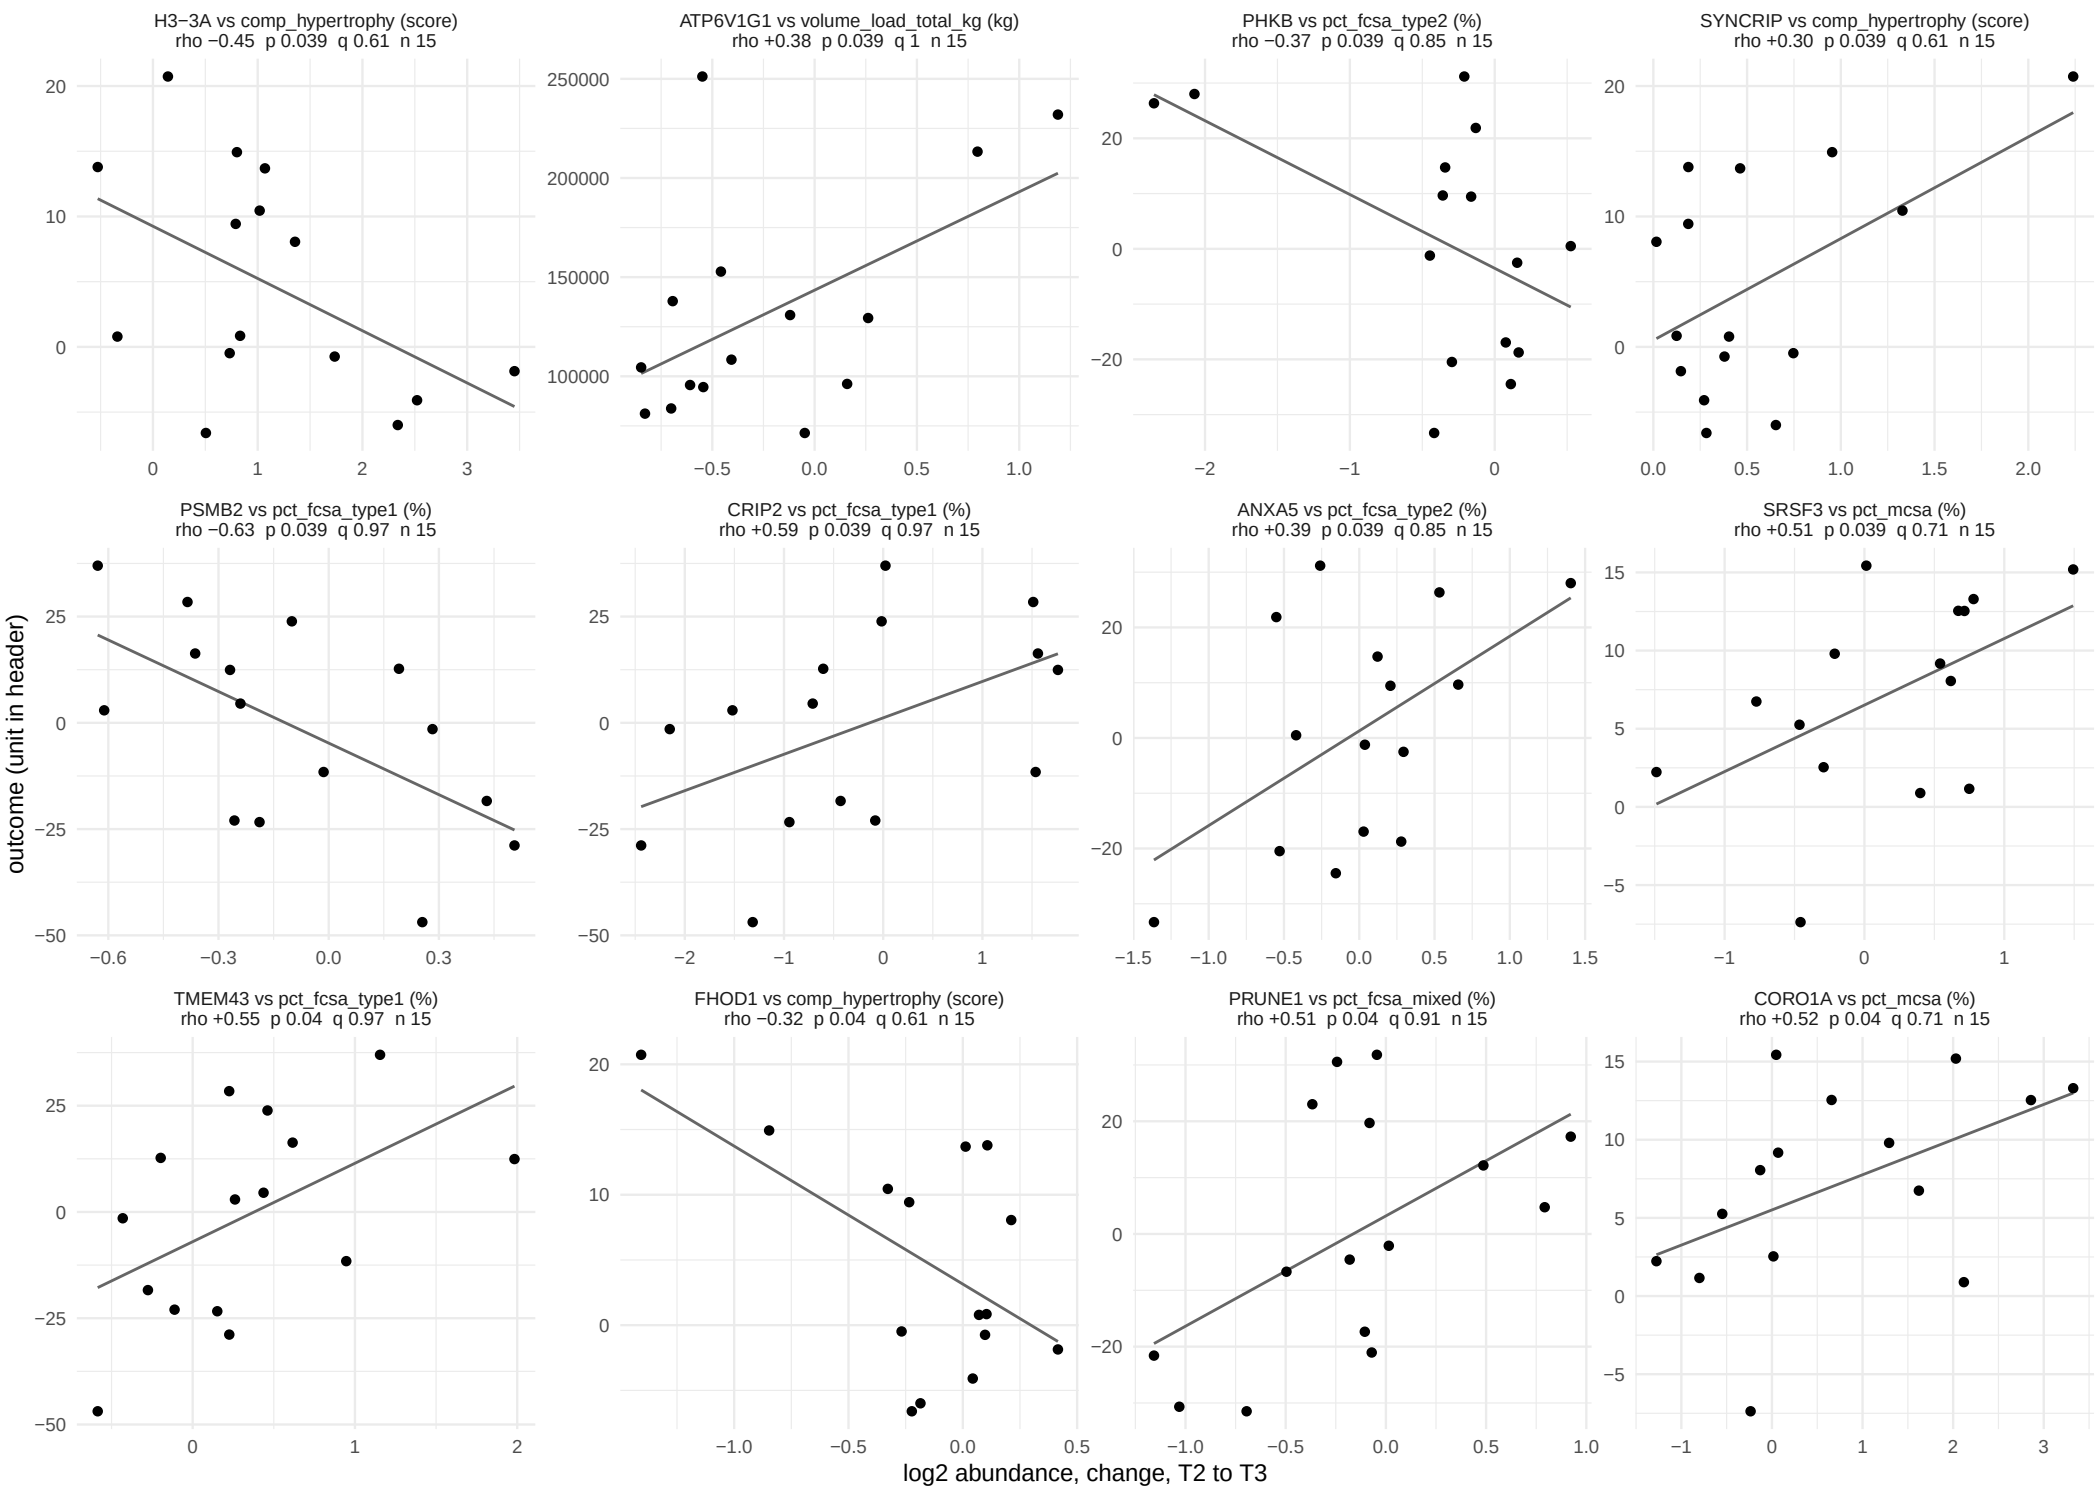

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, acute window


629 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 41 of 53.

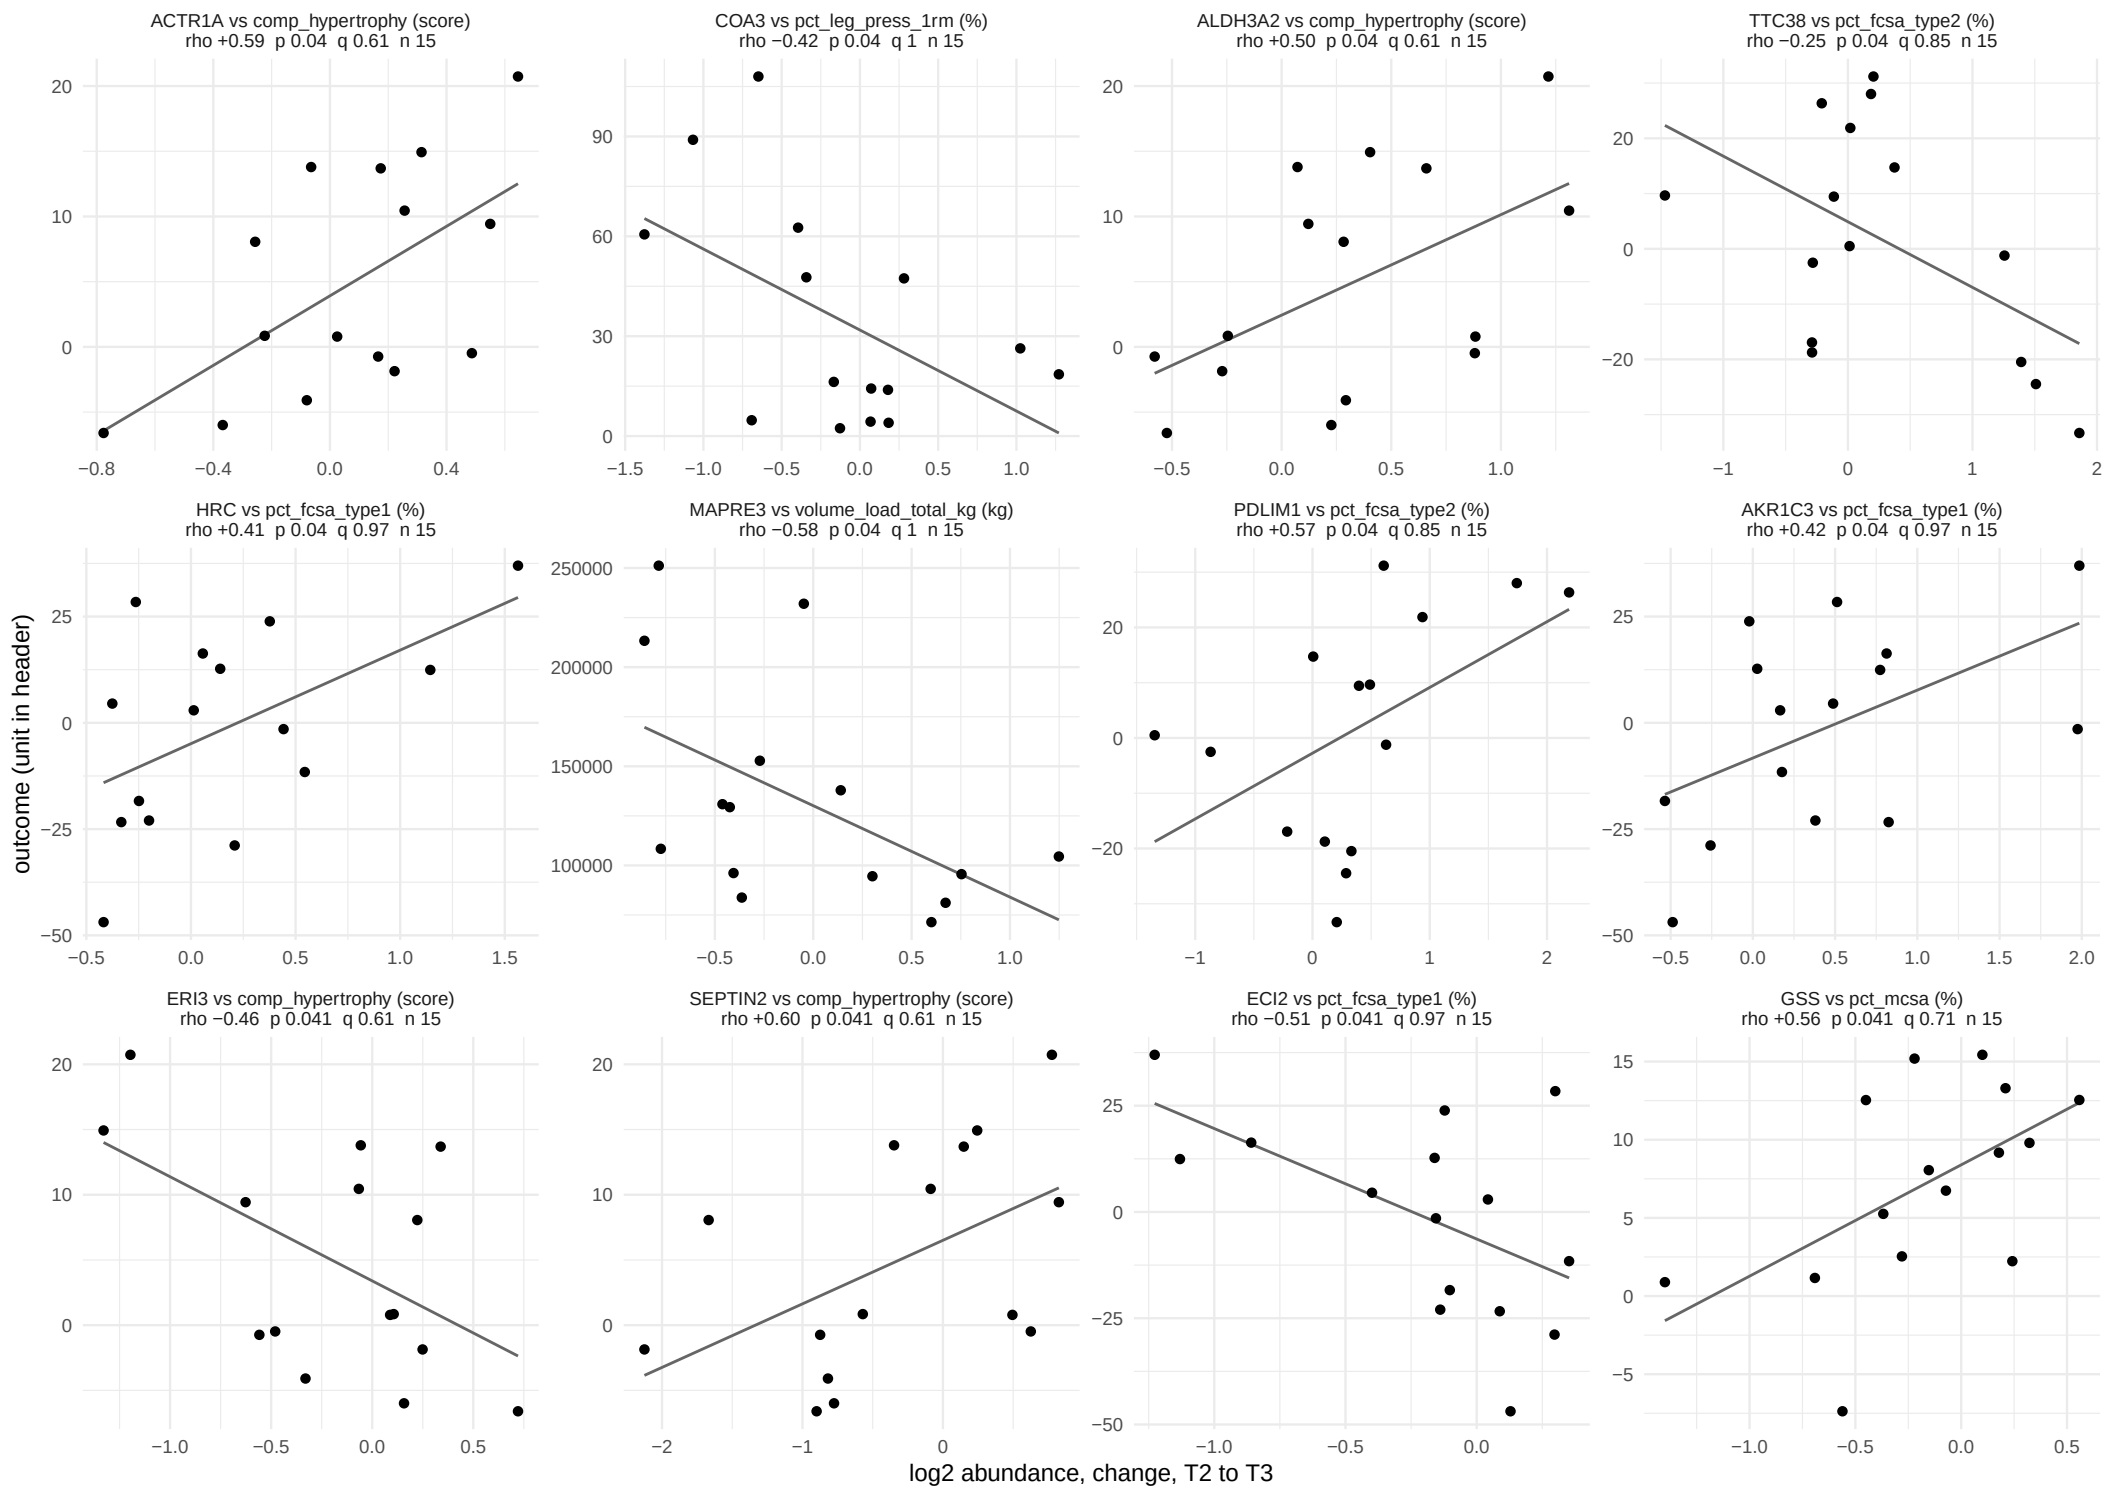

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, acute window


629 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 42 of 53.

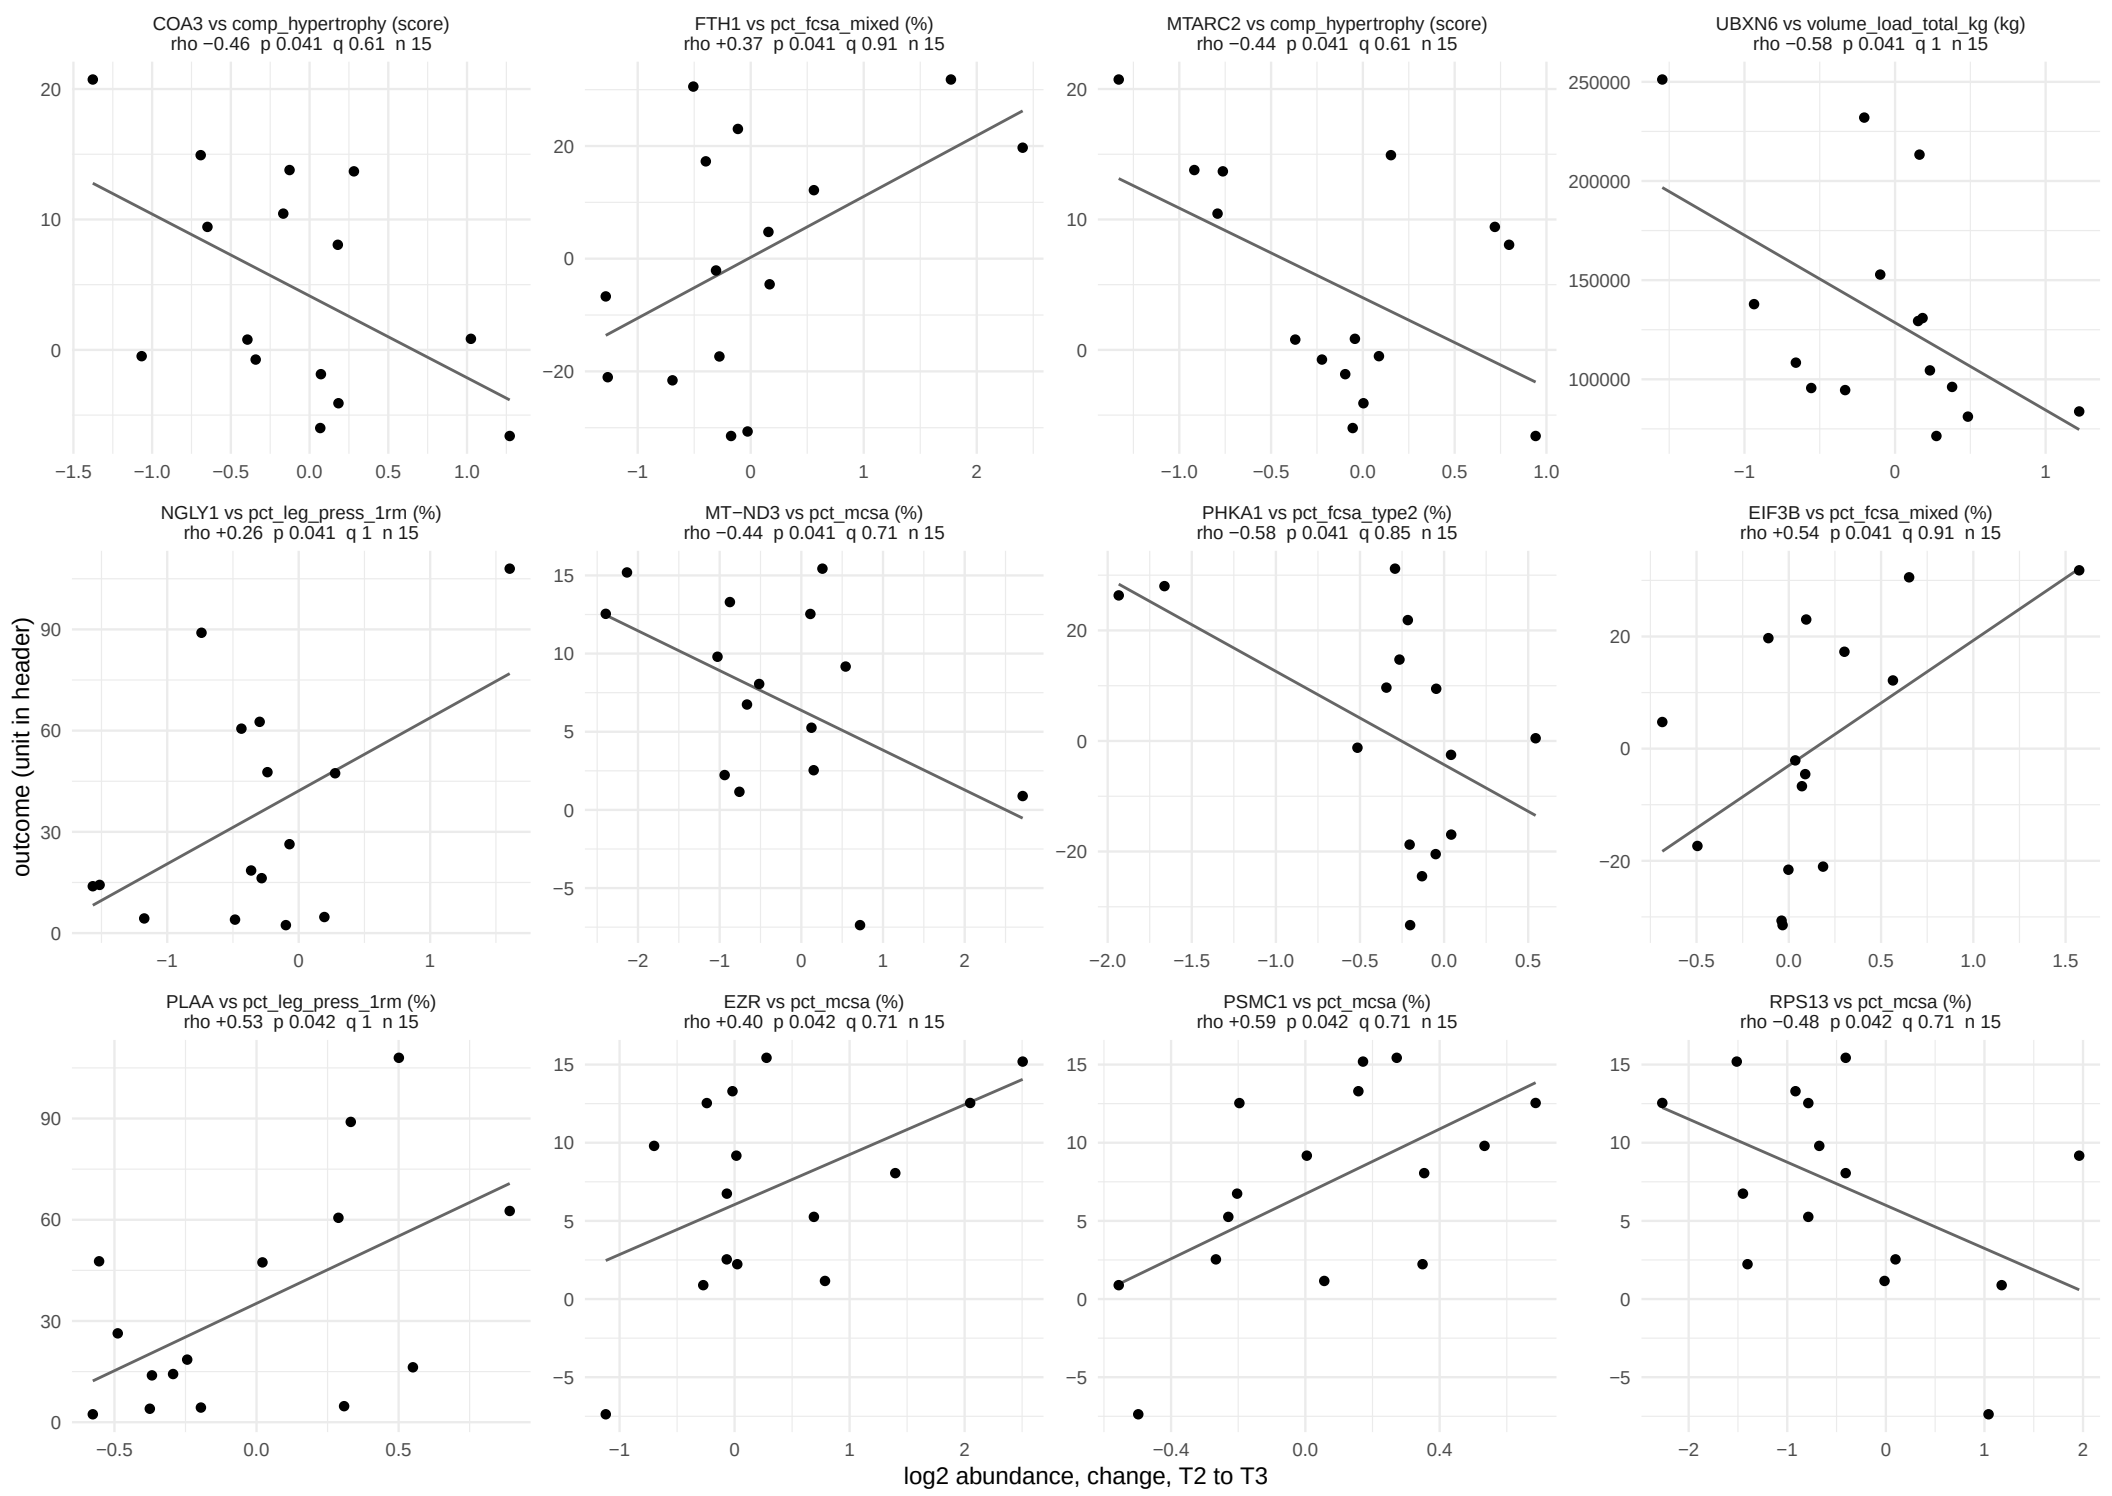

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, acute window


629 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 43 of 53.

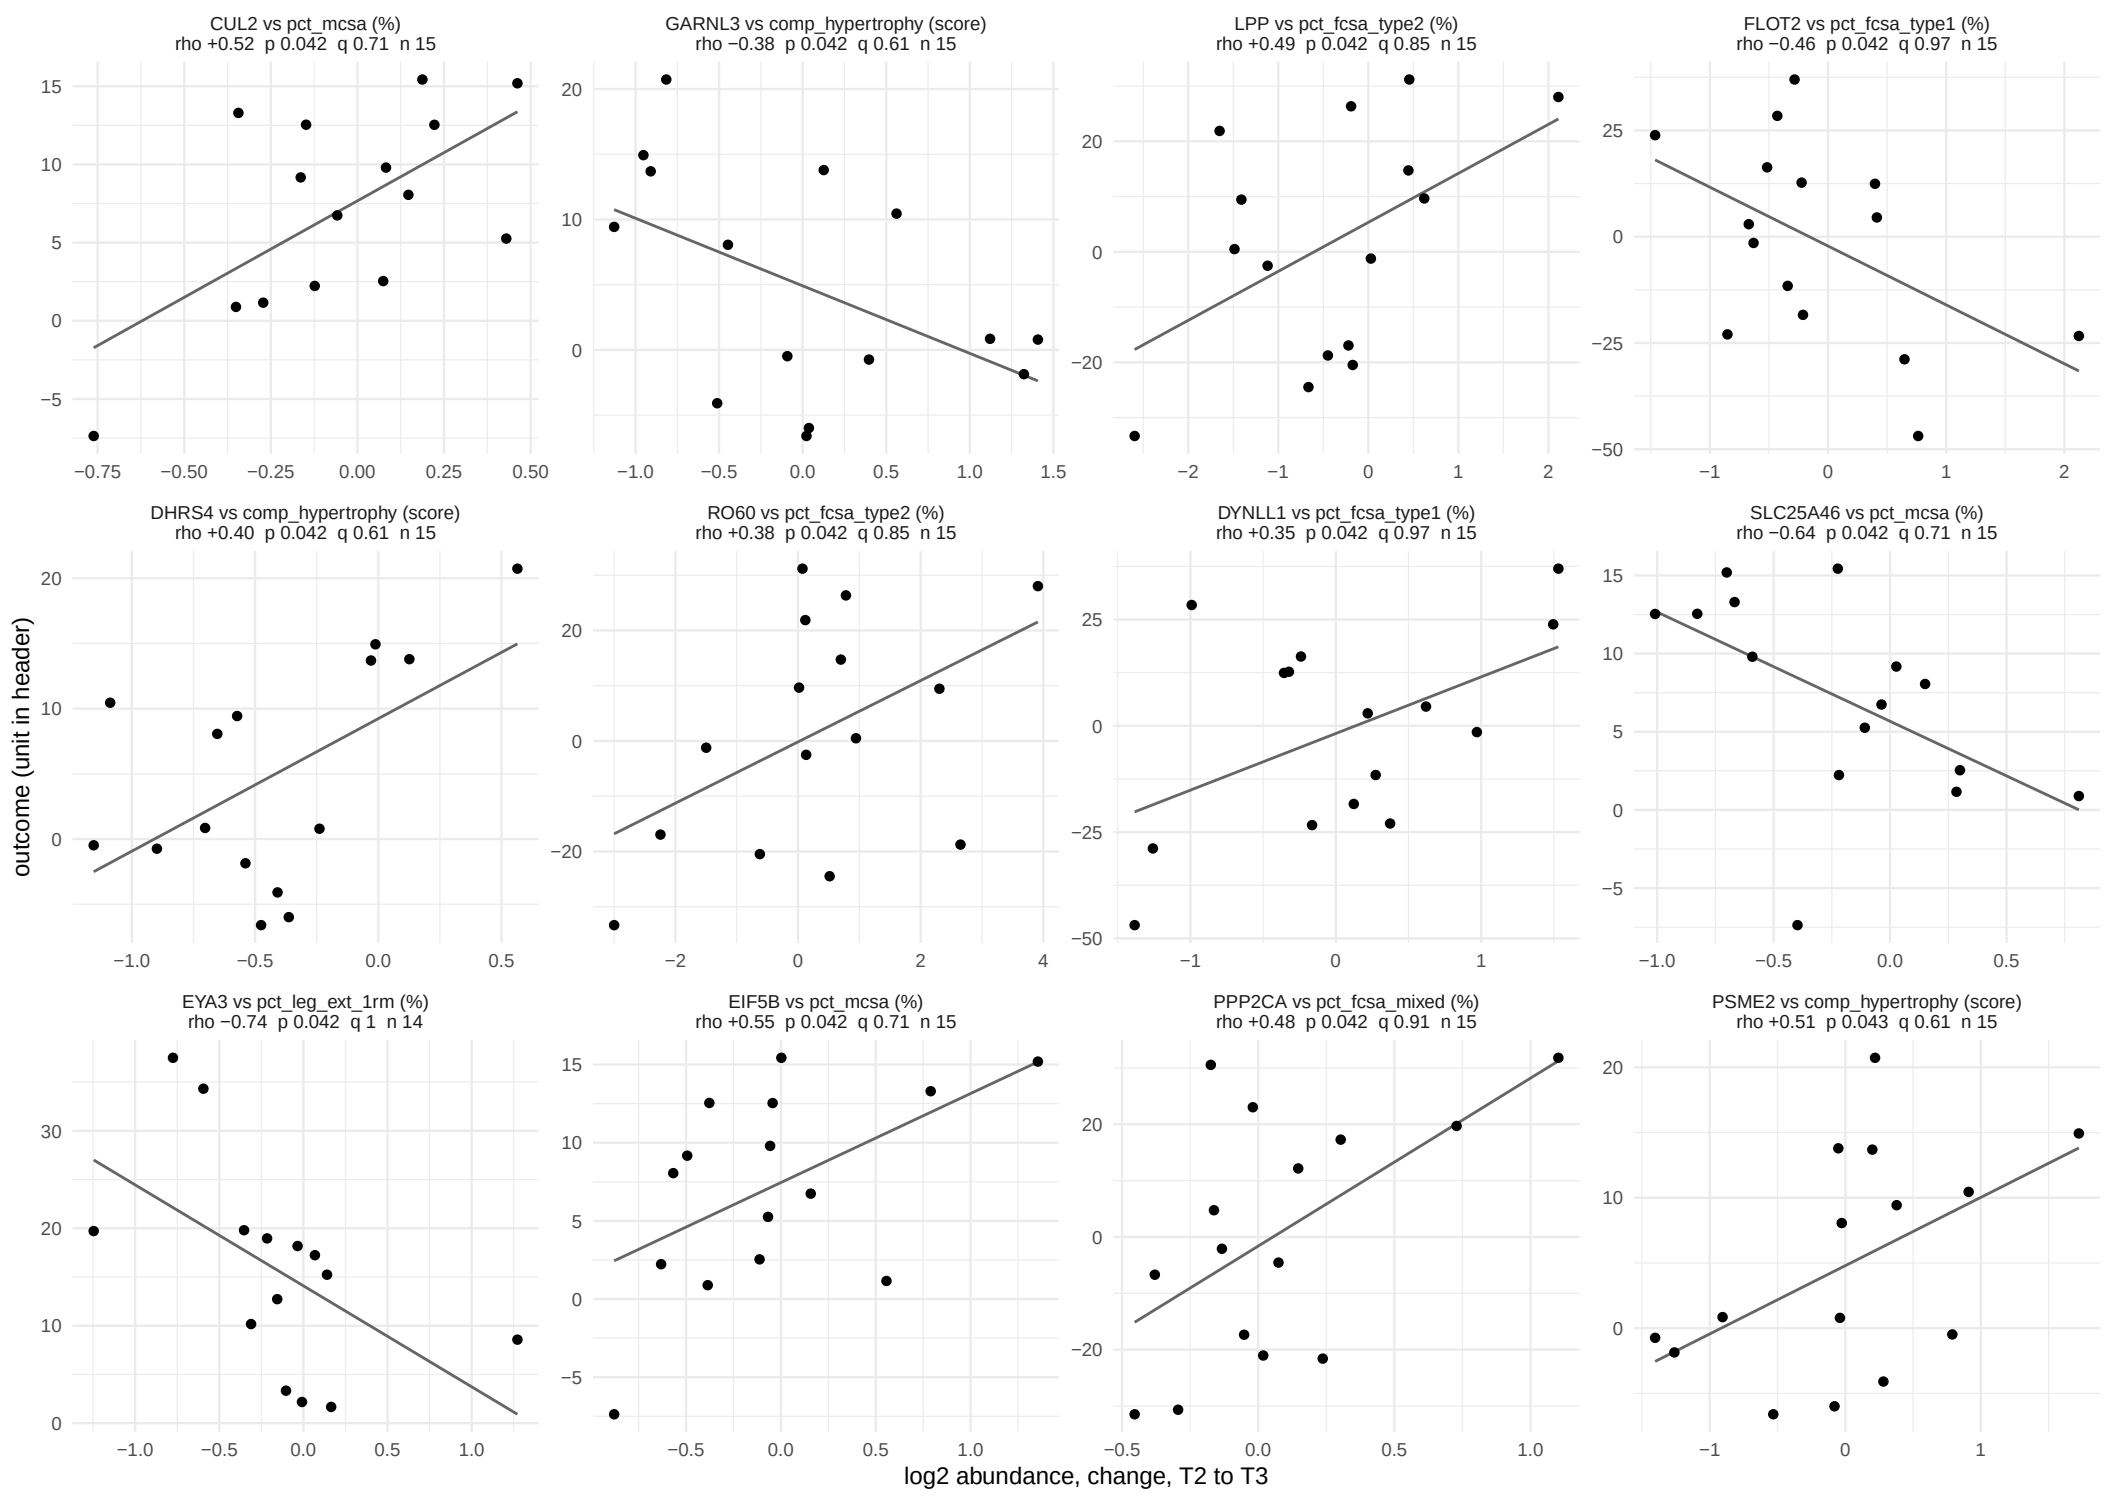

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, acute window


629 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 44 of 53.

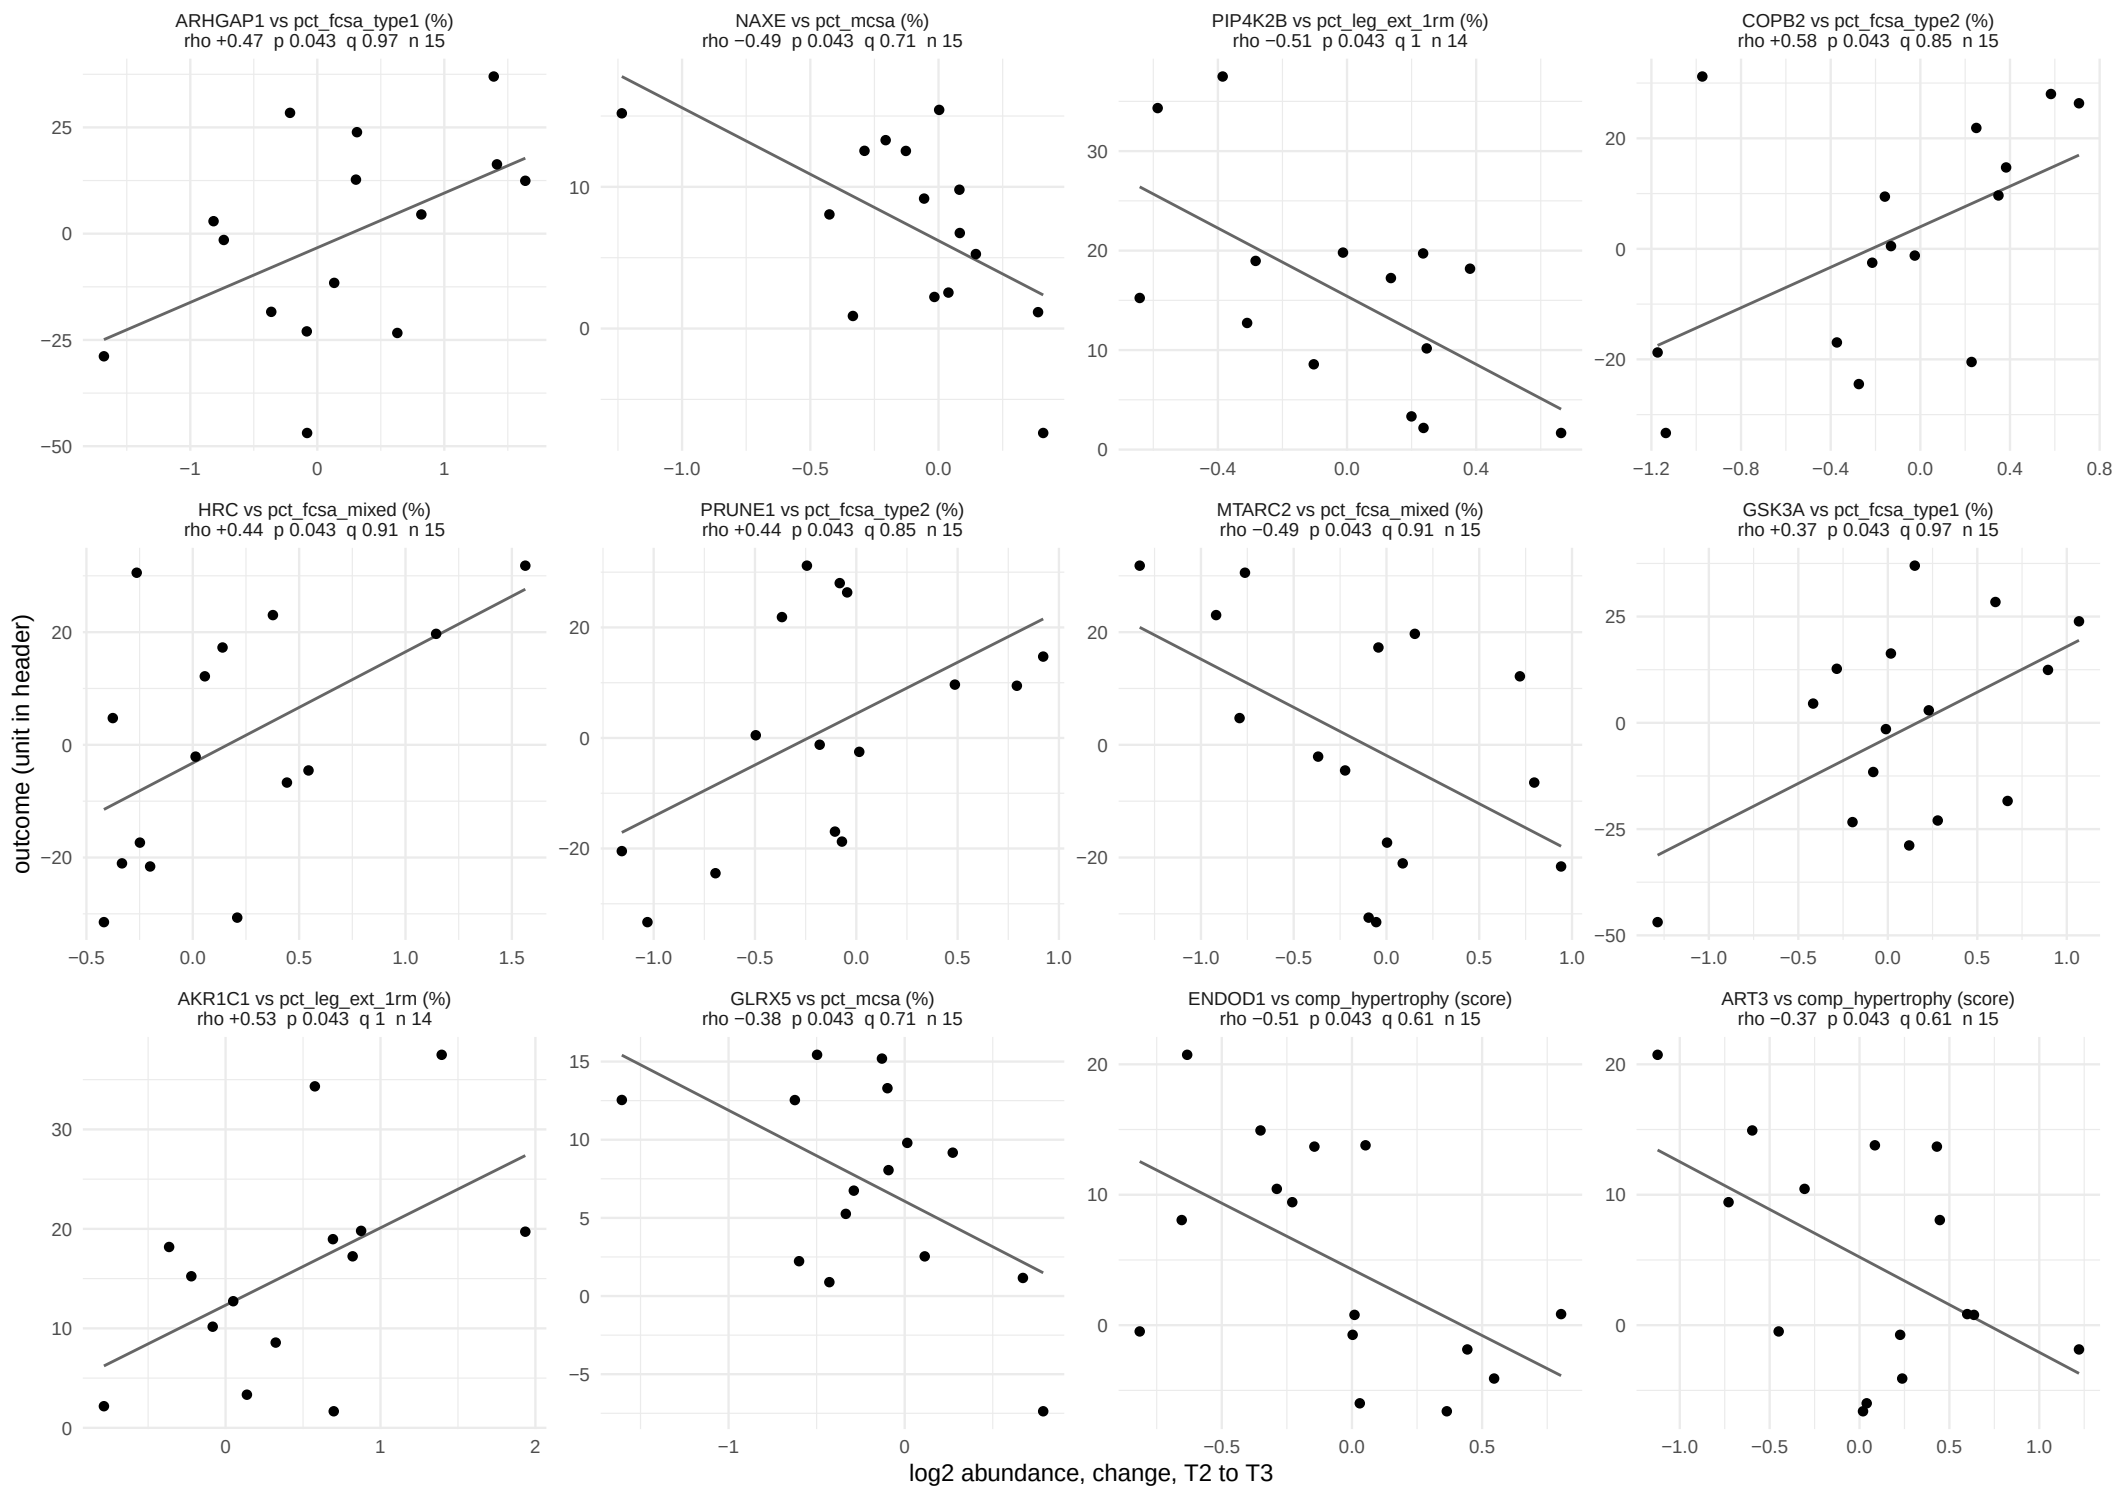

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, acute window


629 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 45 of 53.

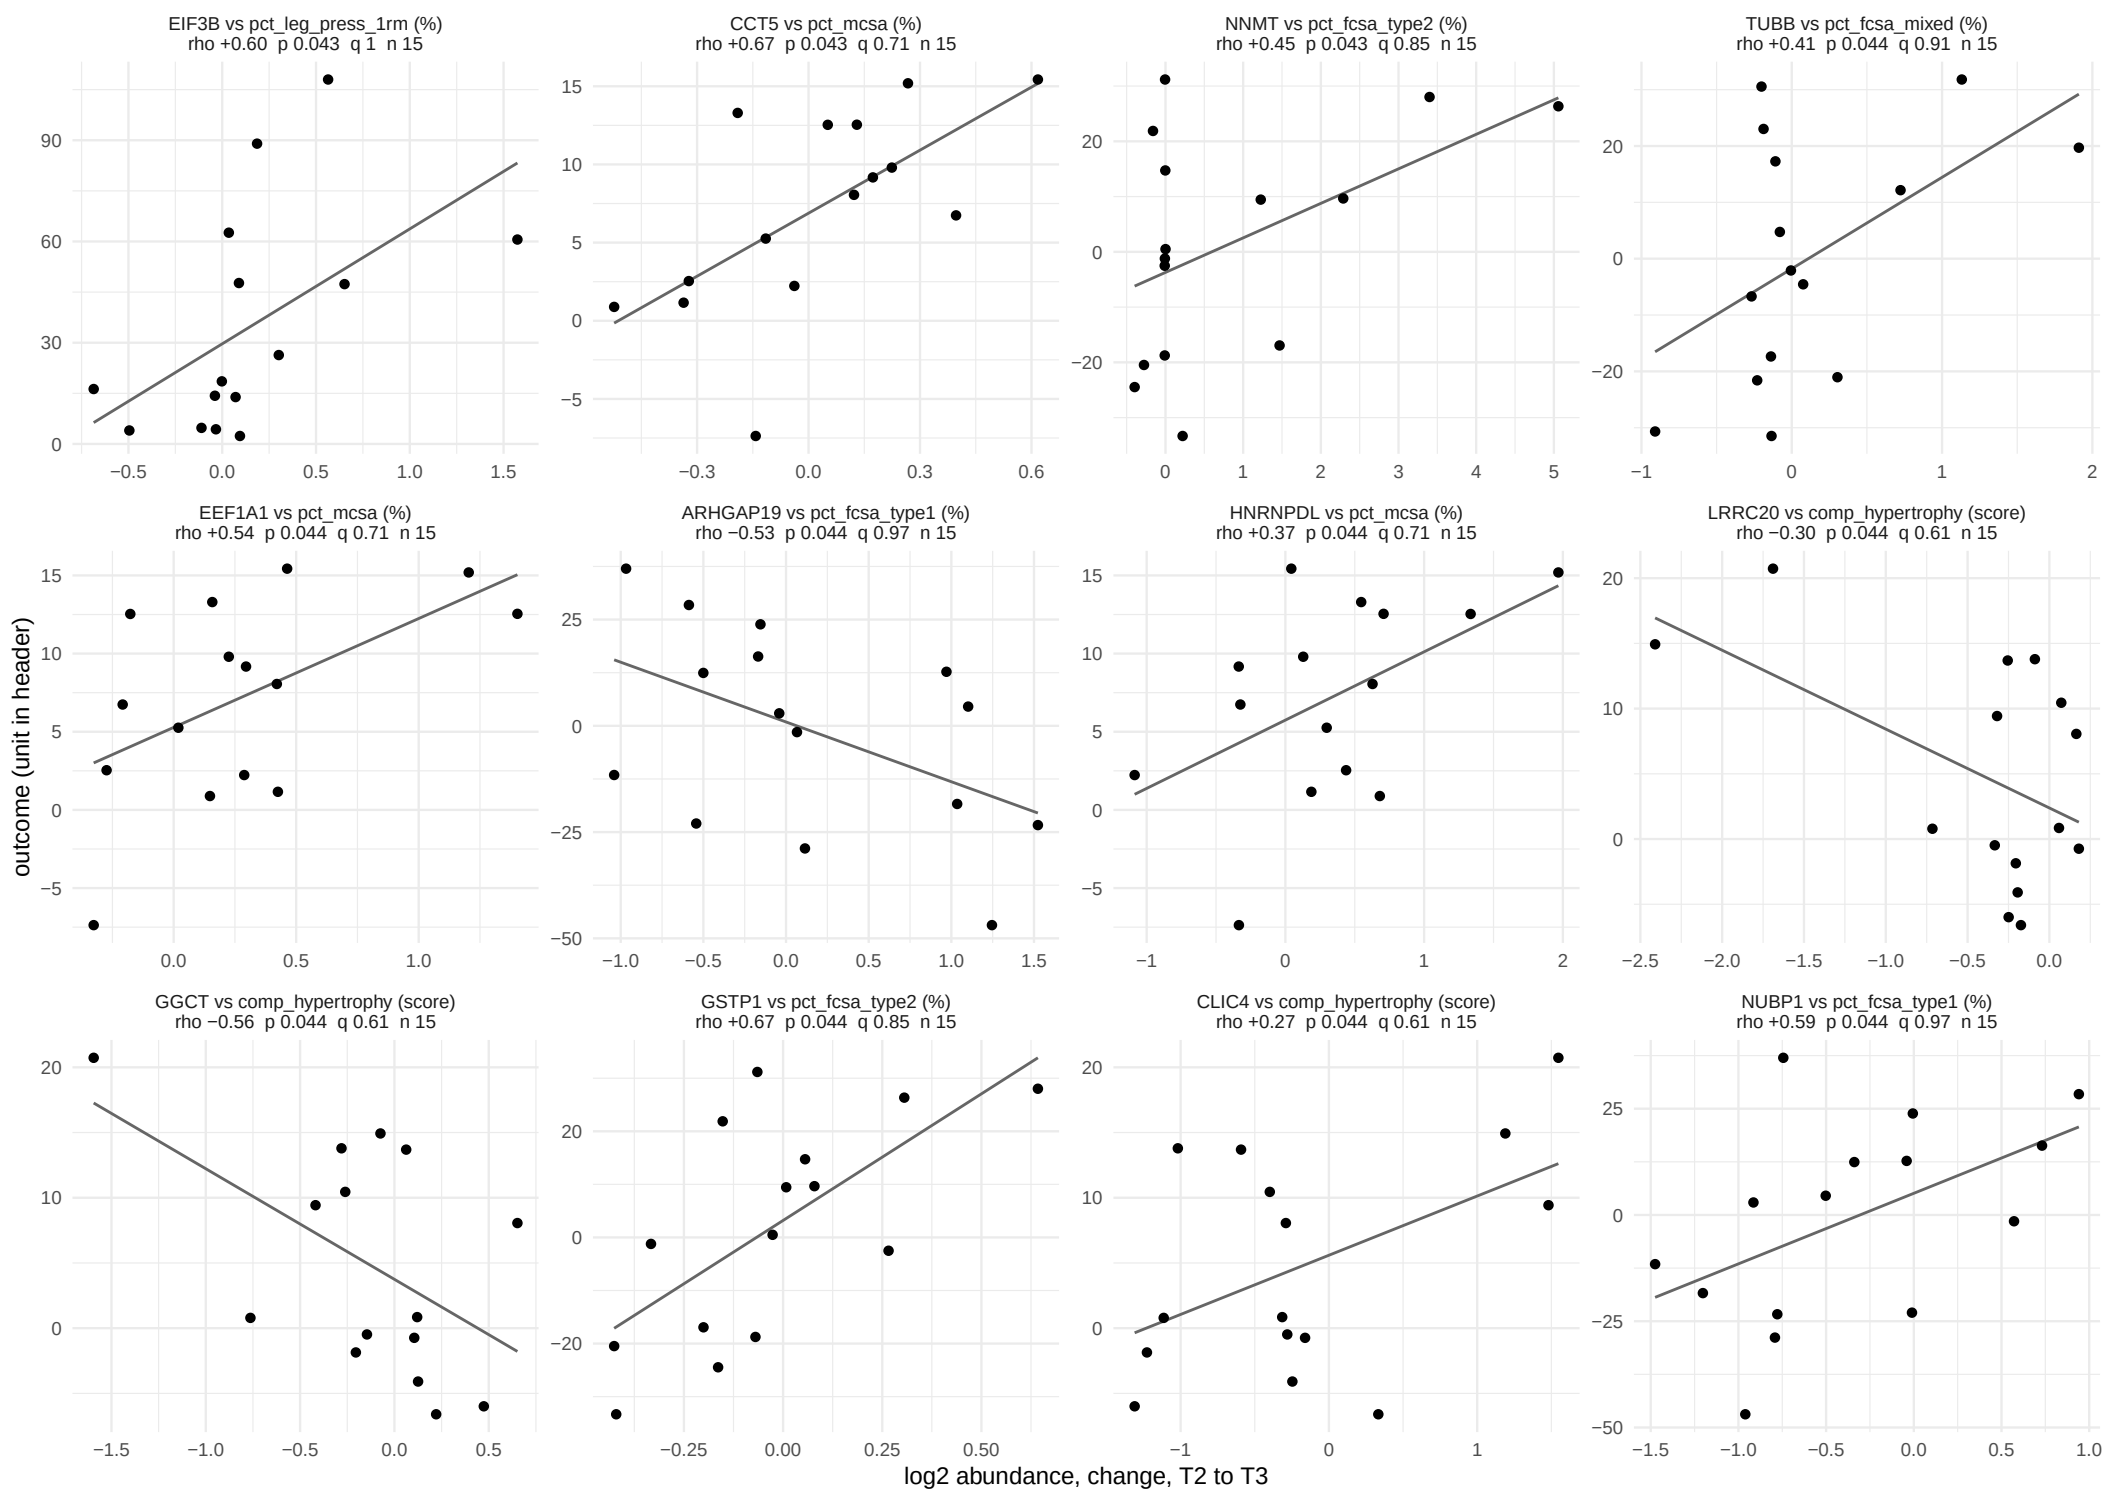

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, acute window


629 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 46 of 53.

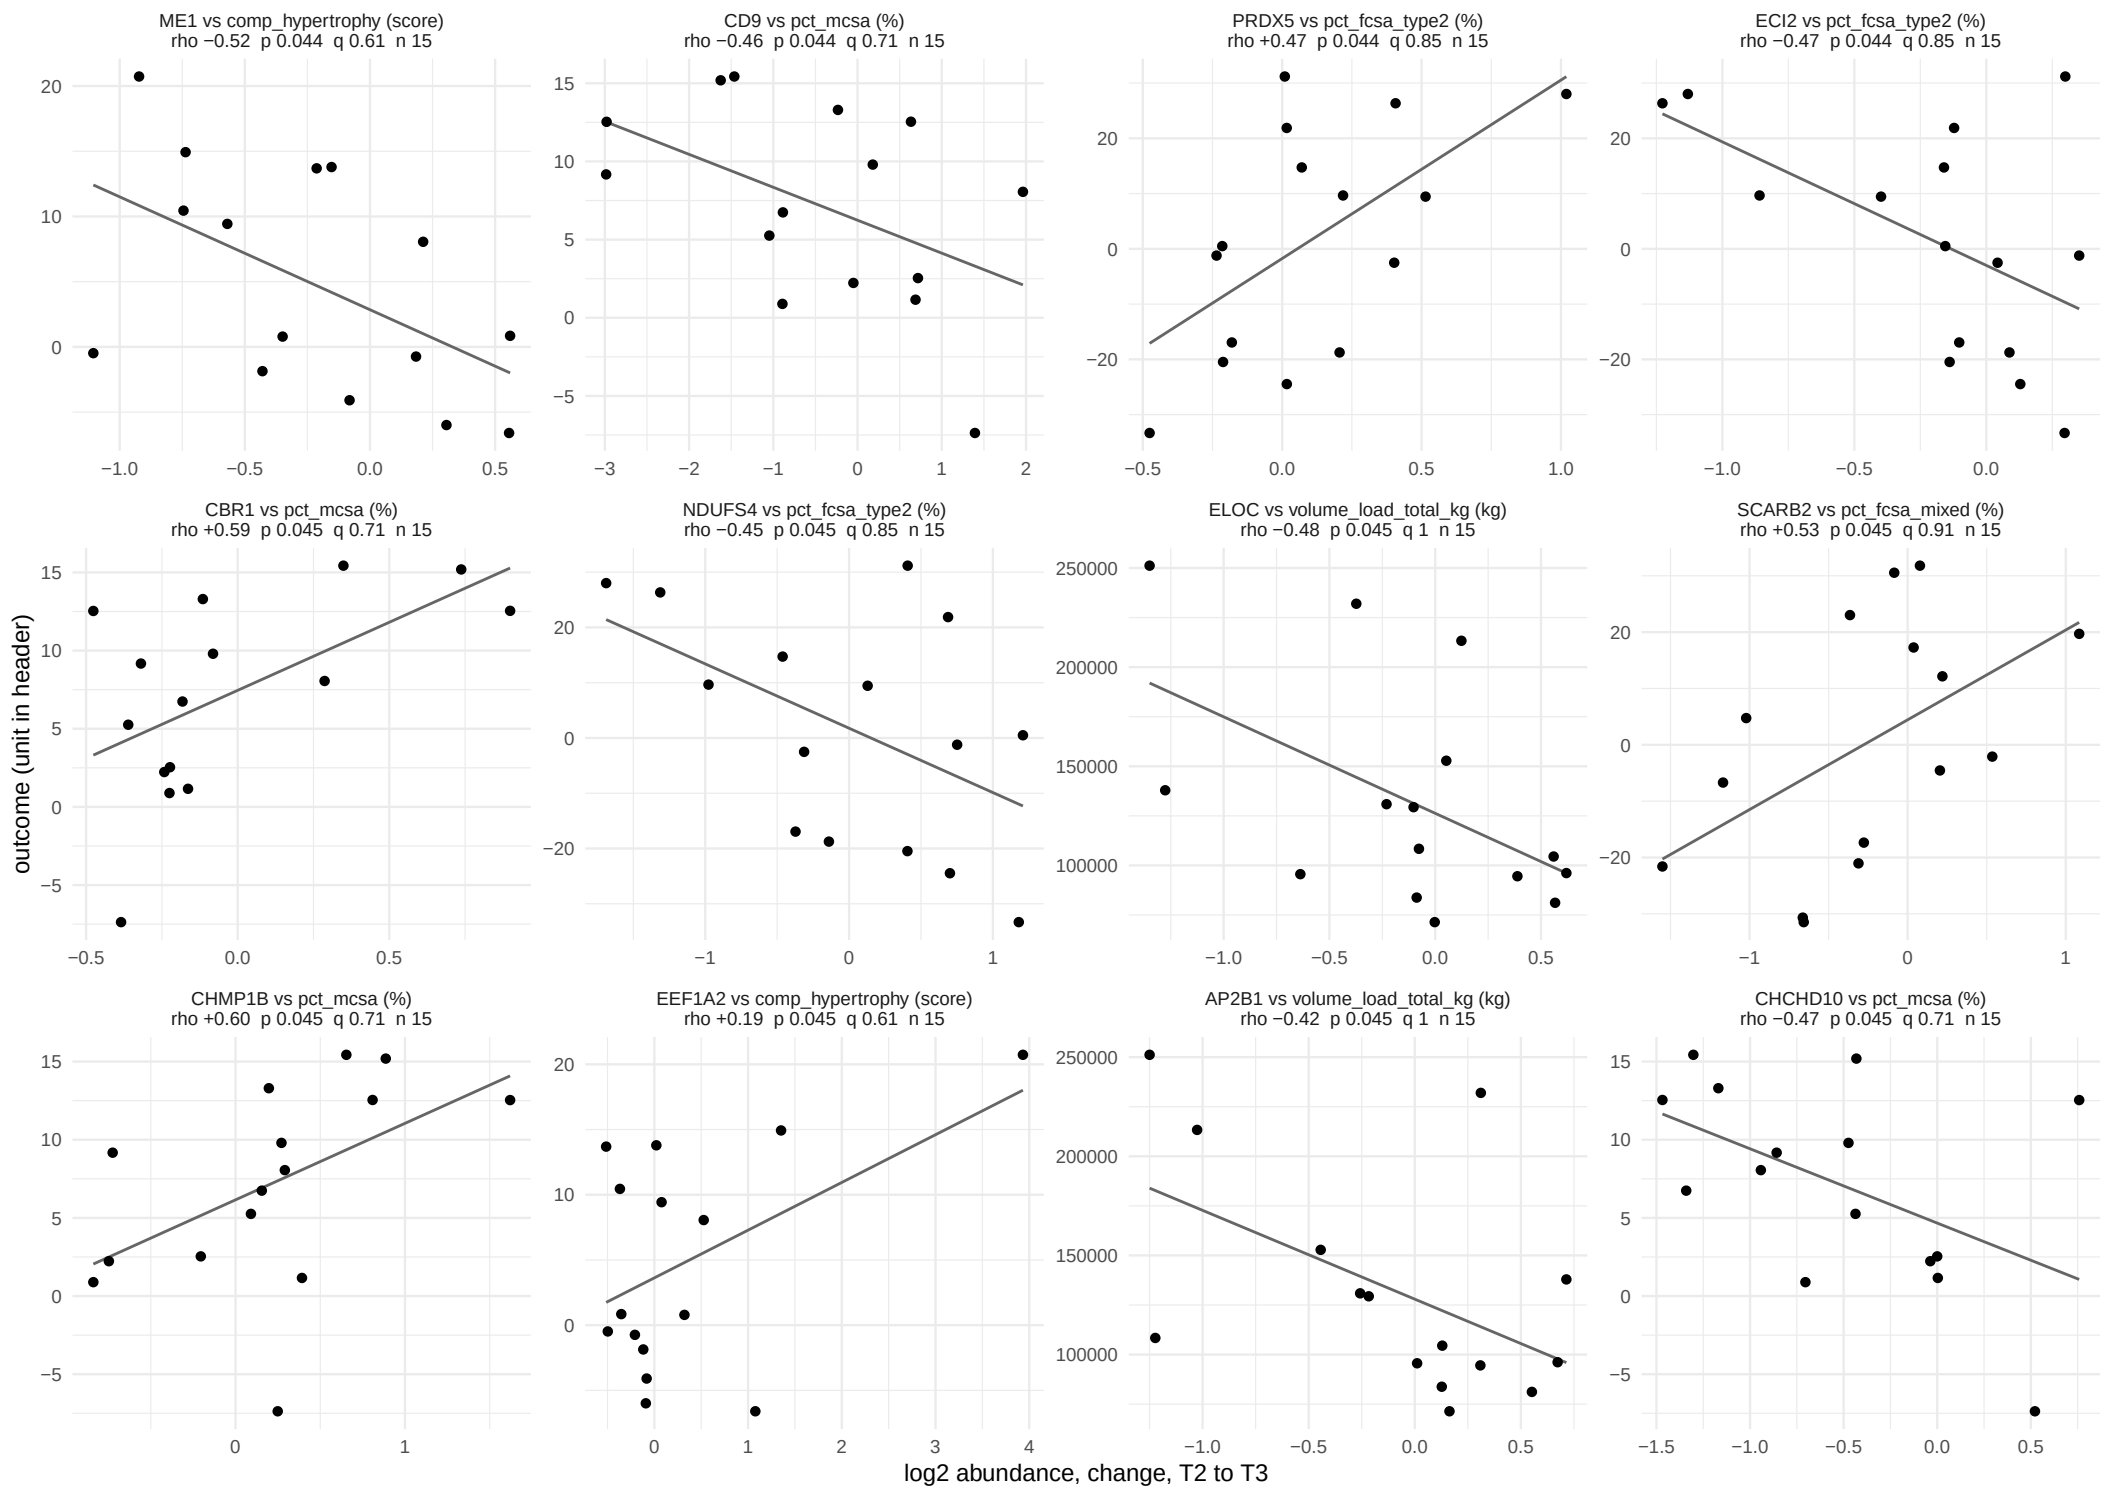

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, acute window


629 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 47 of 53.

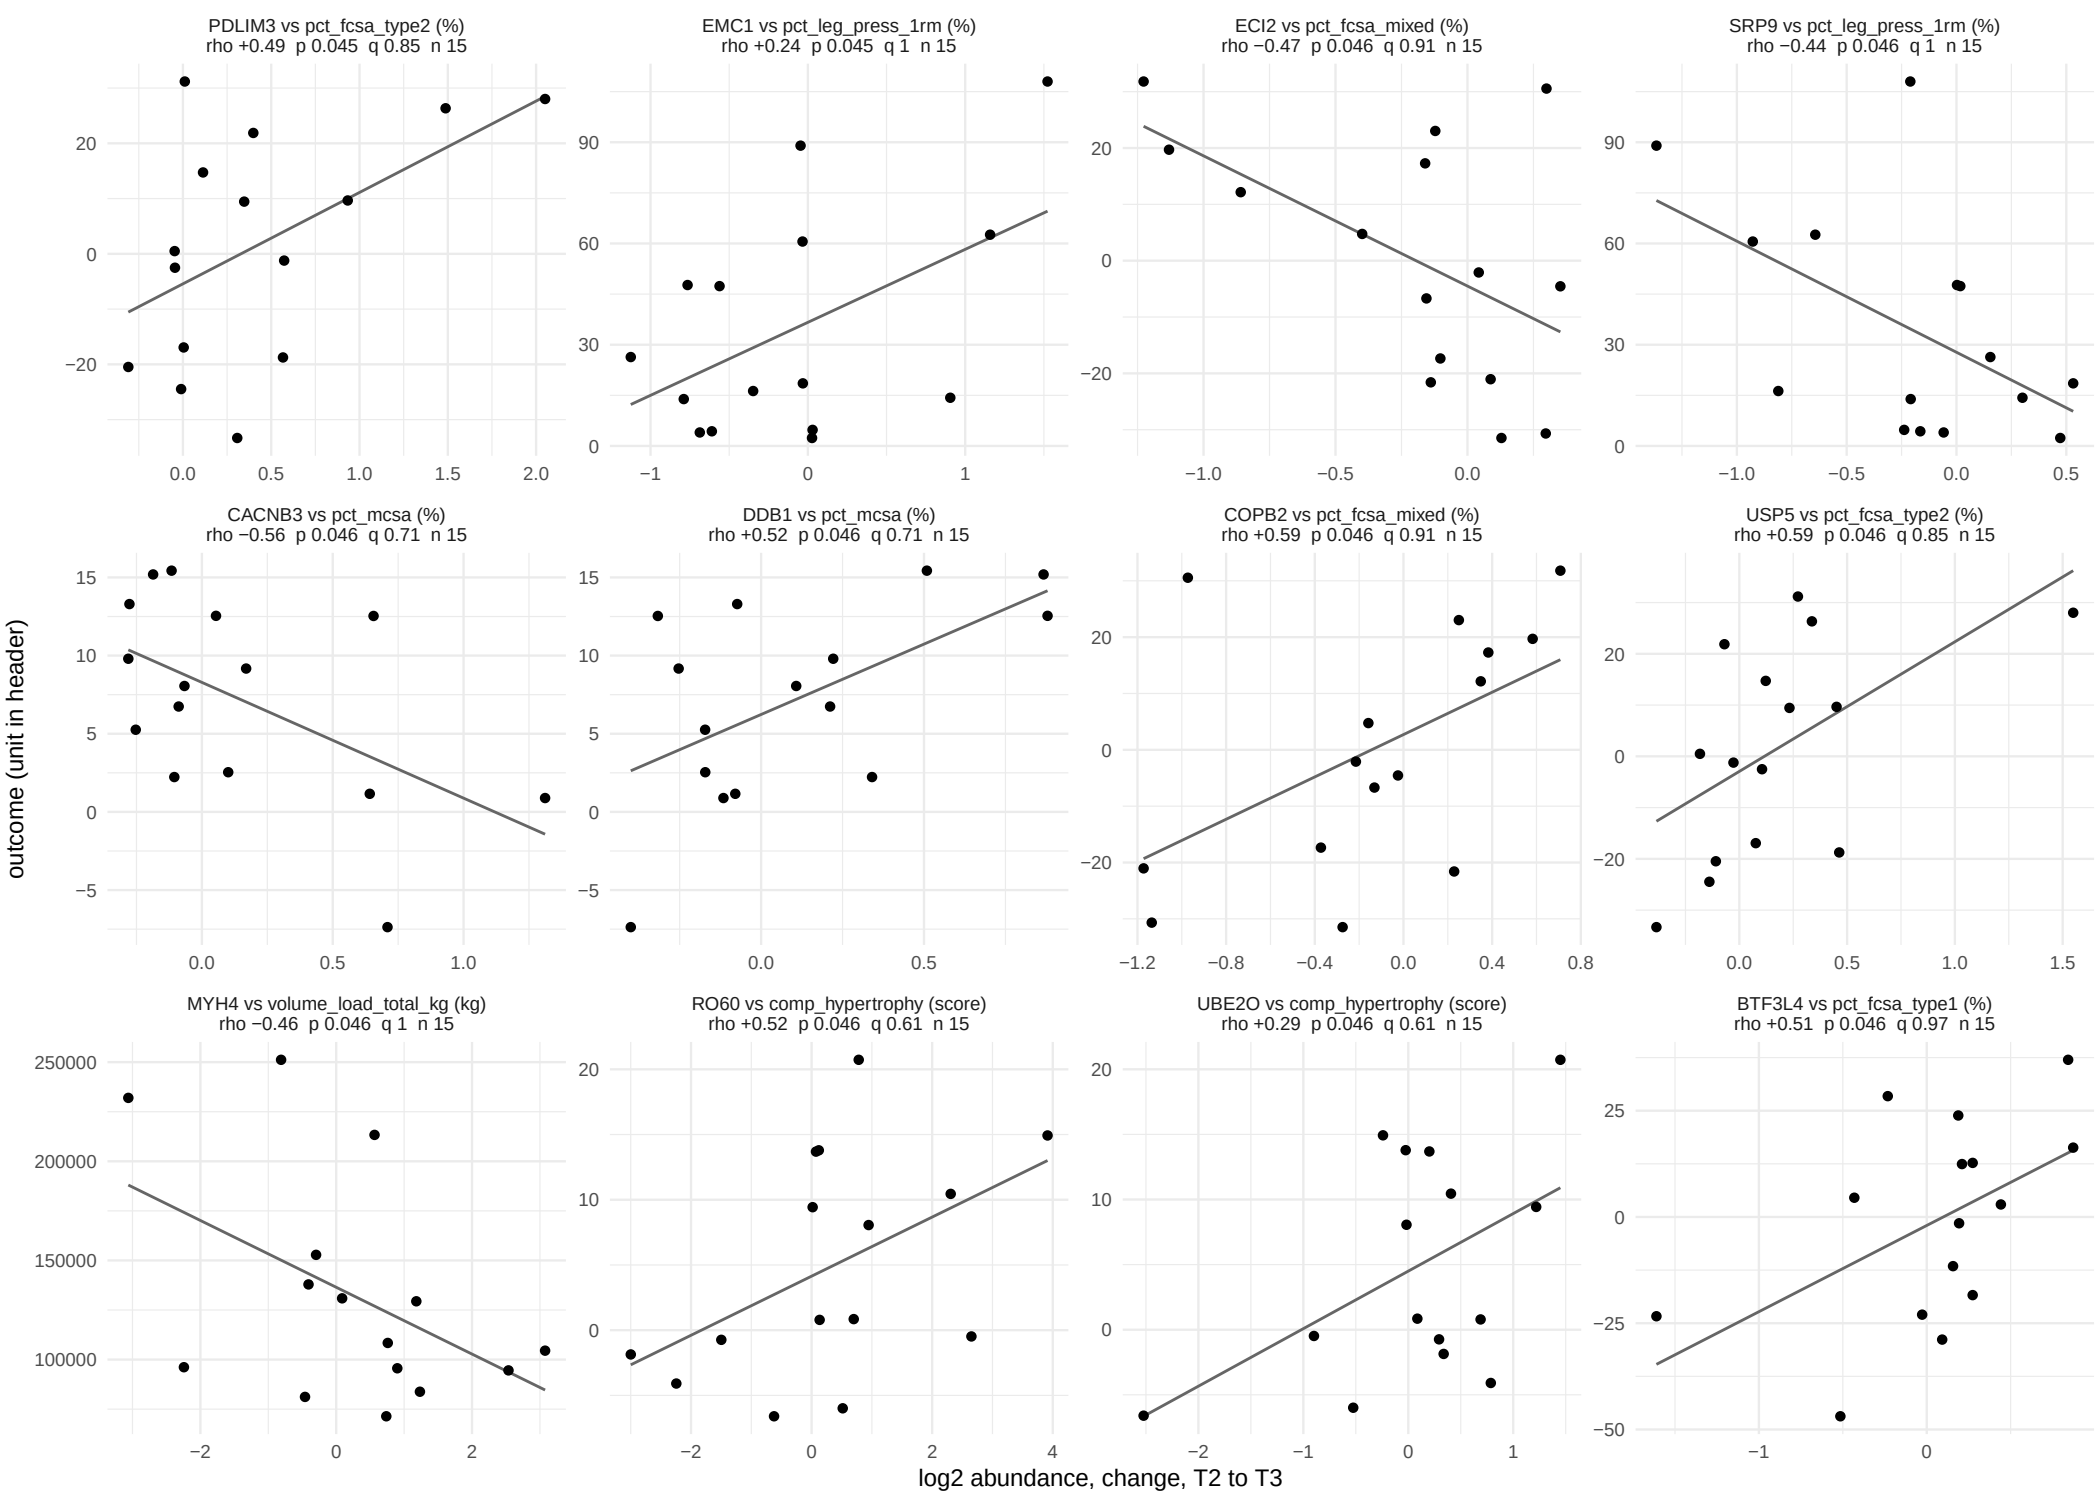

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, acute window


629 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 48 of 53.

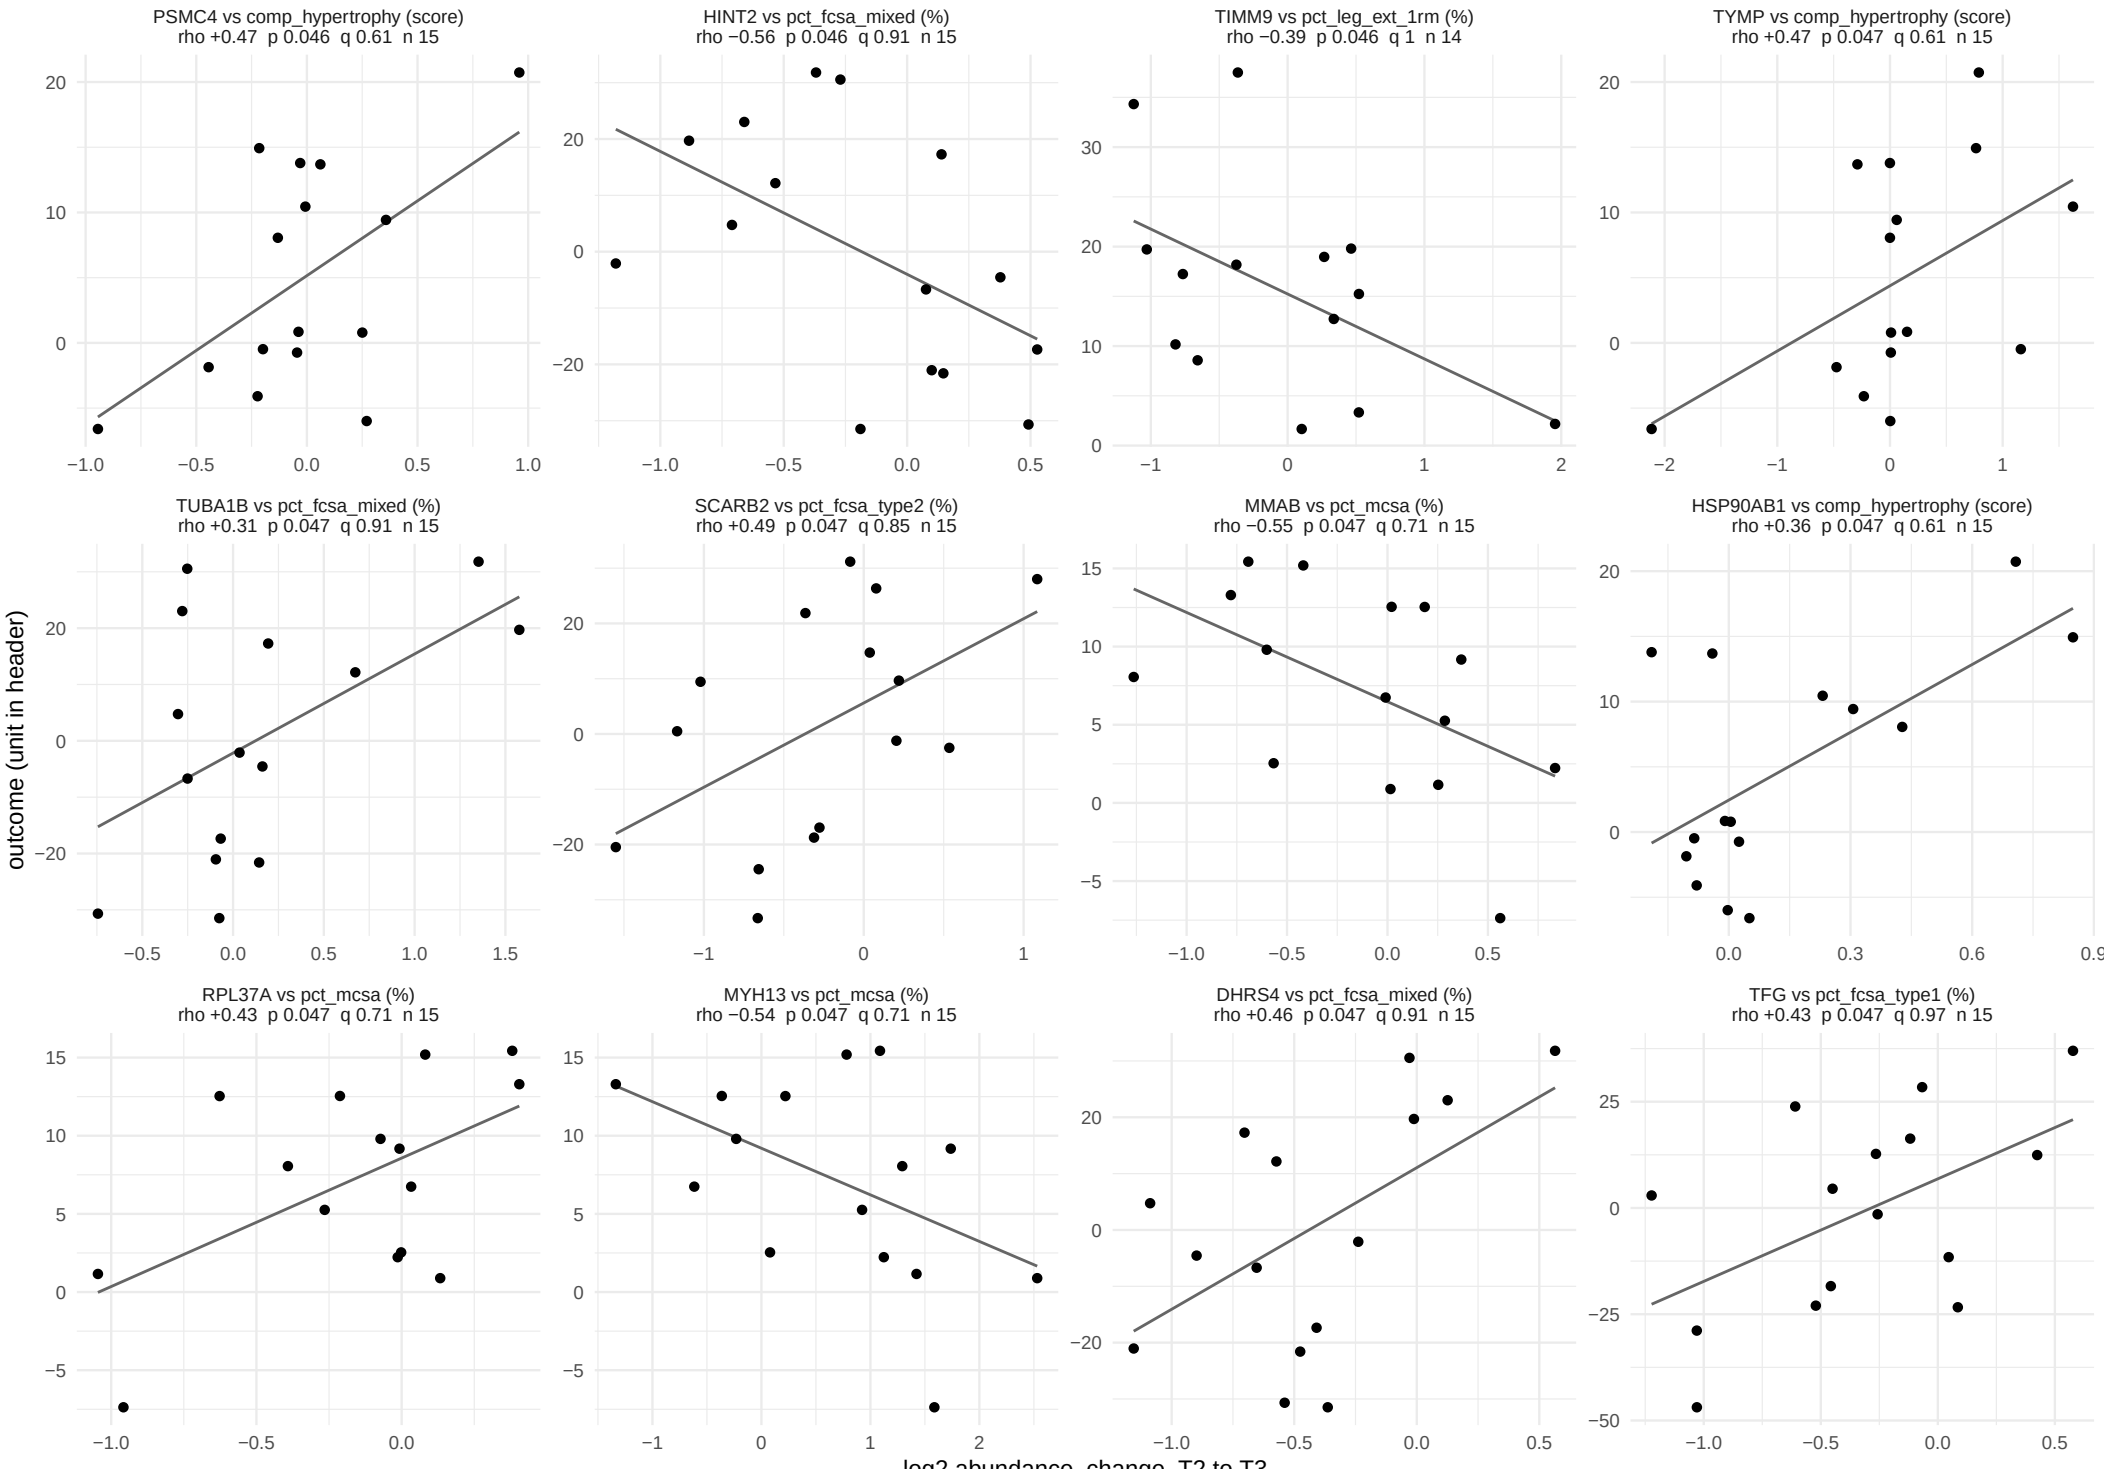

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, acute window


629 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 49 of 53.

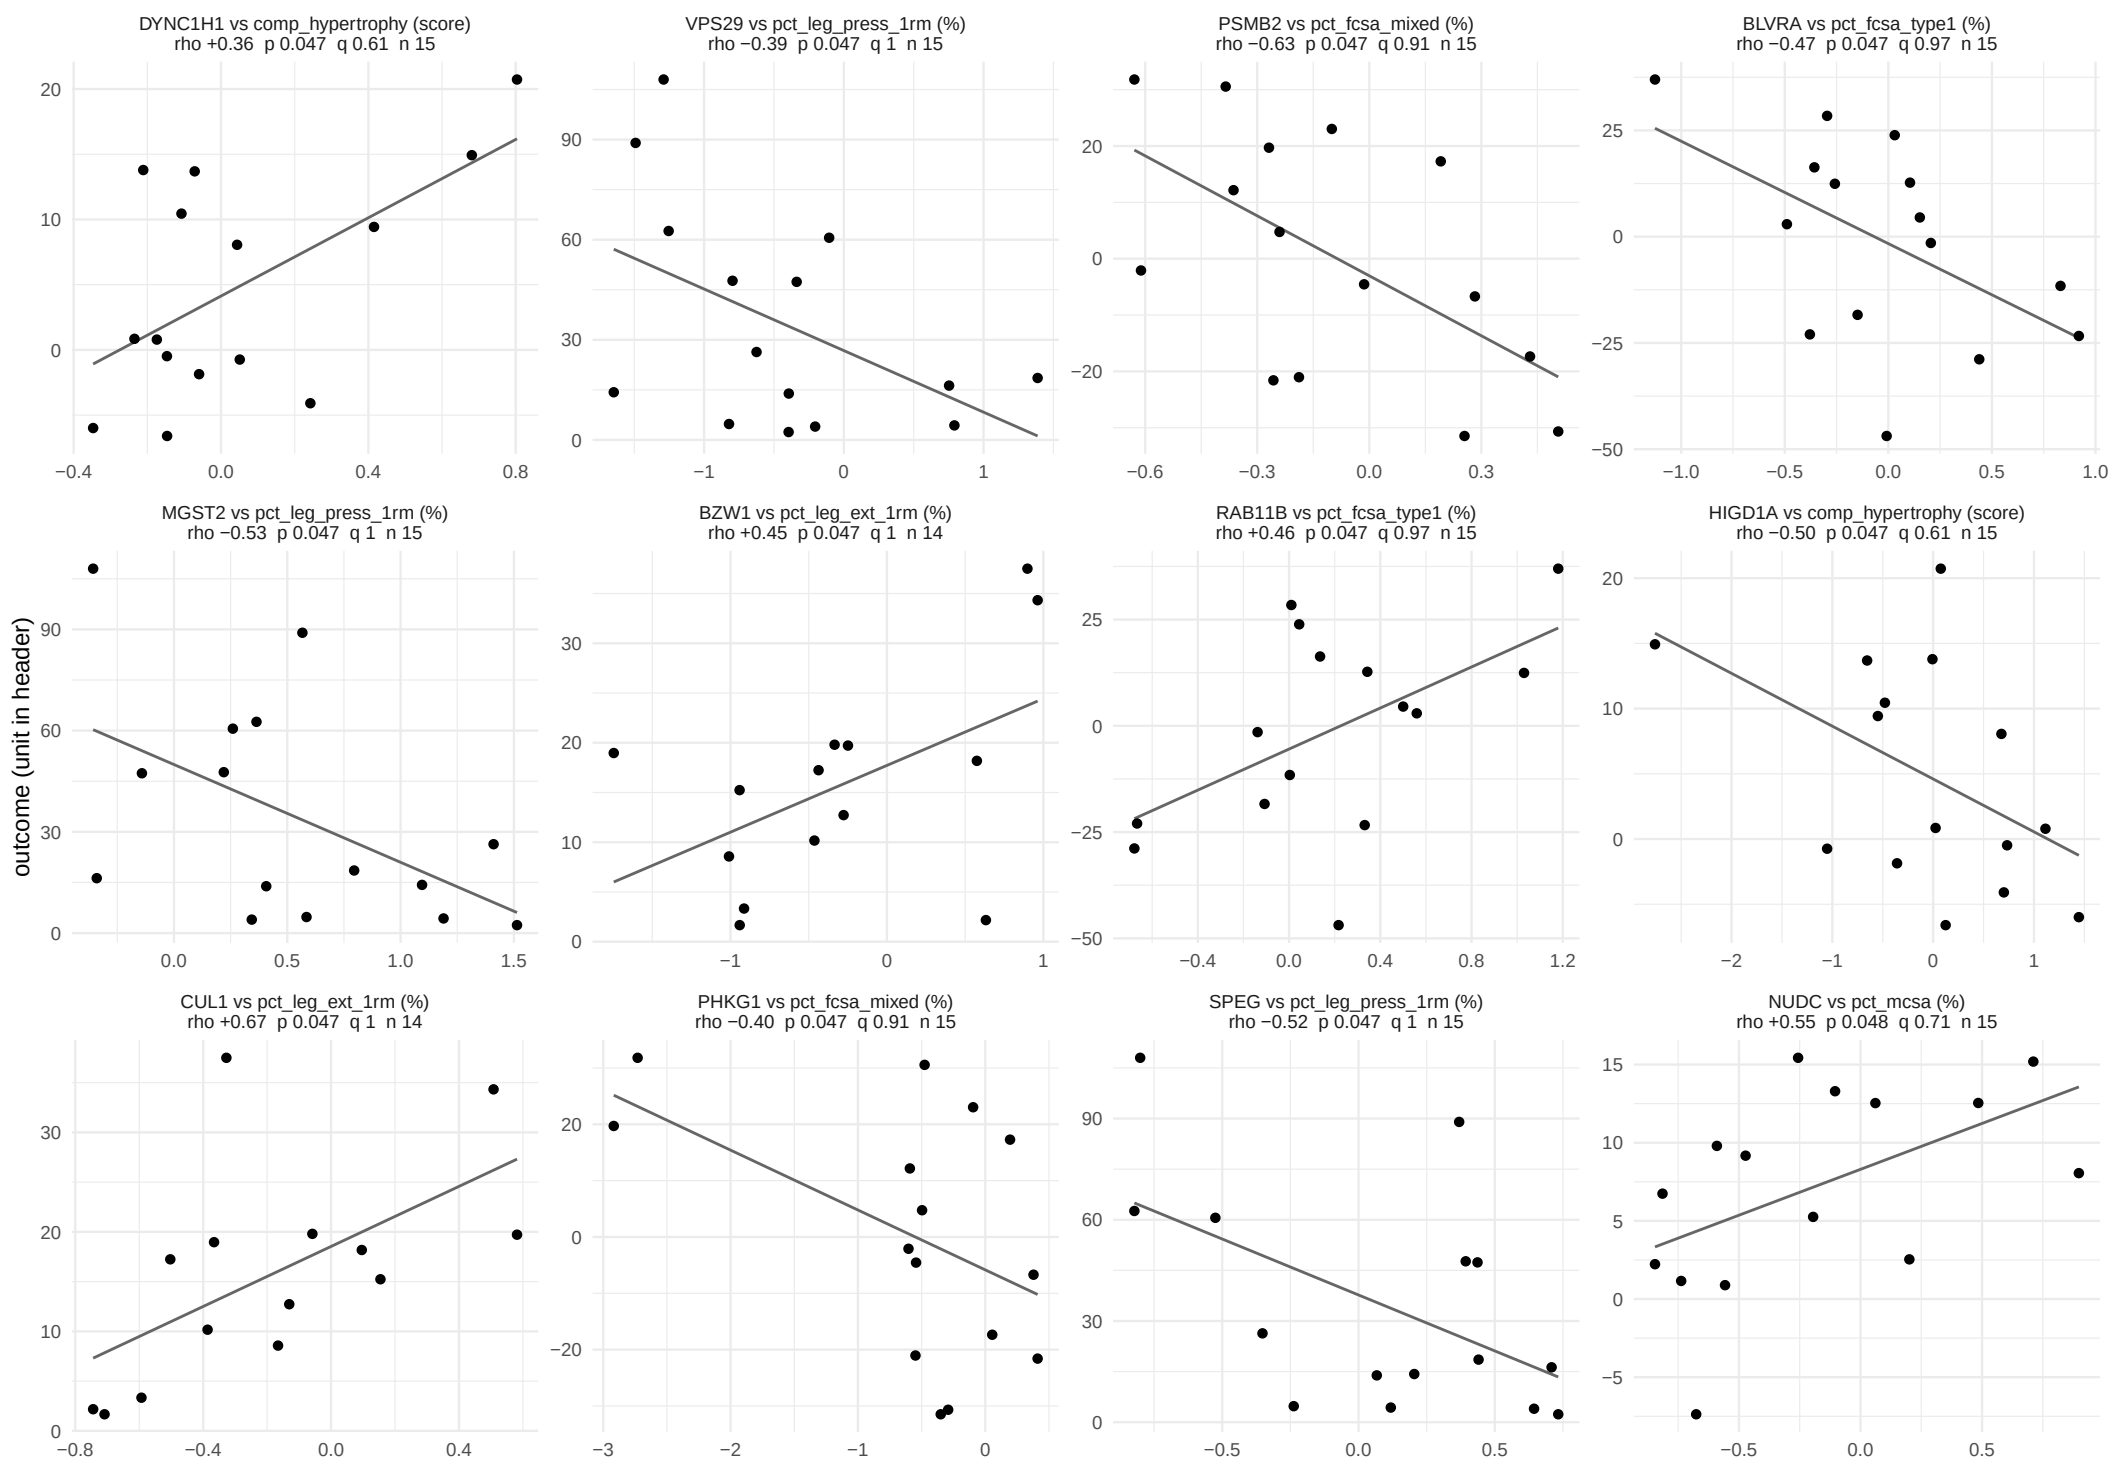

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, acute window


629 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 50 of 53.

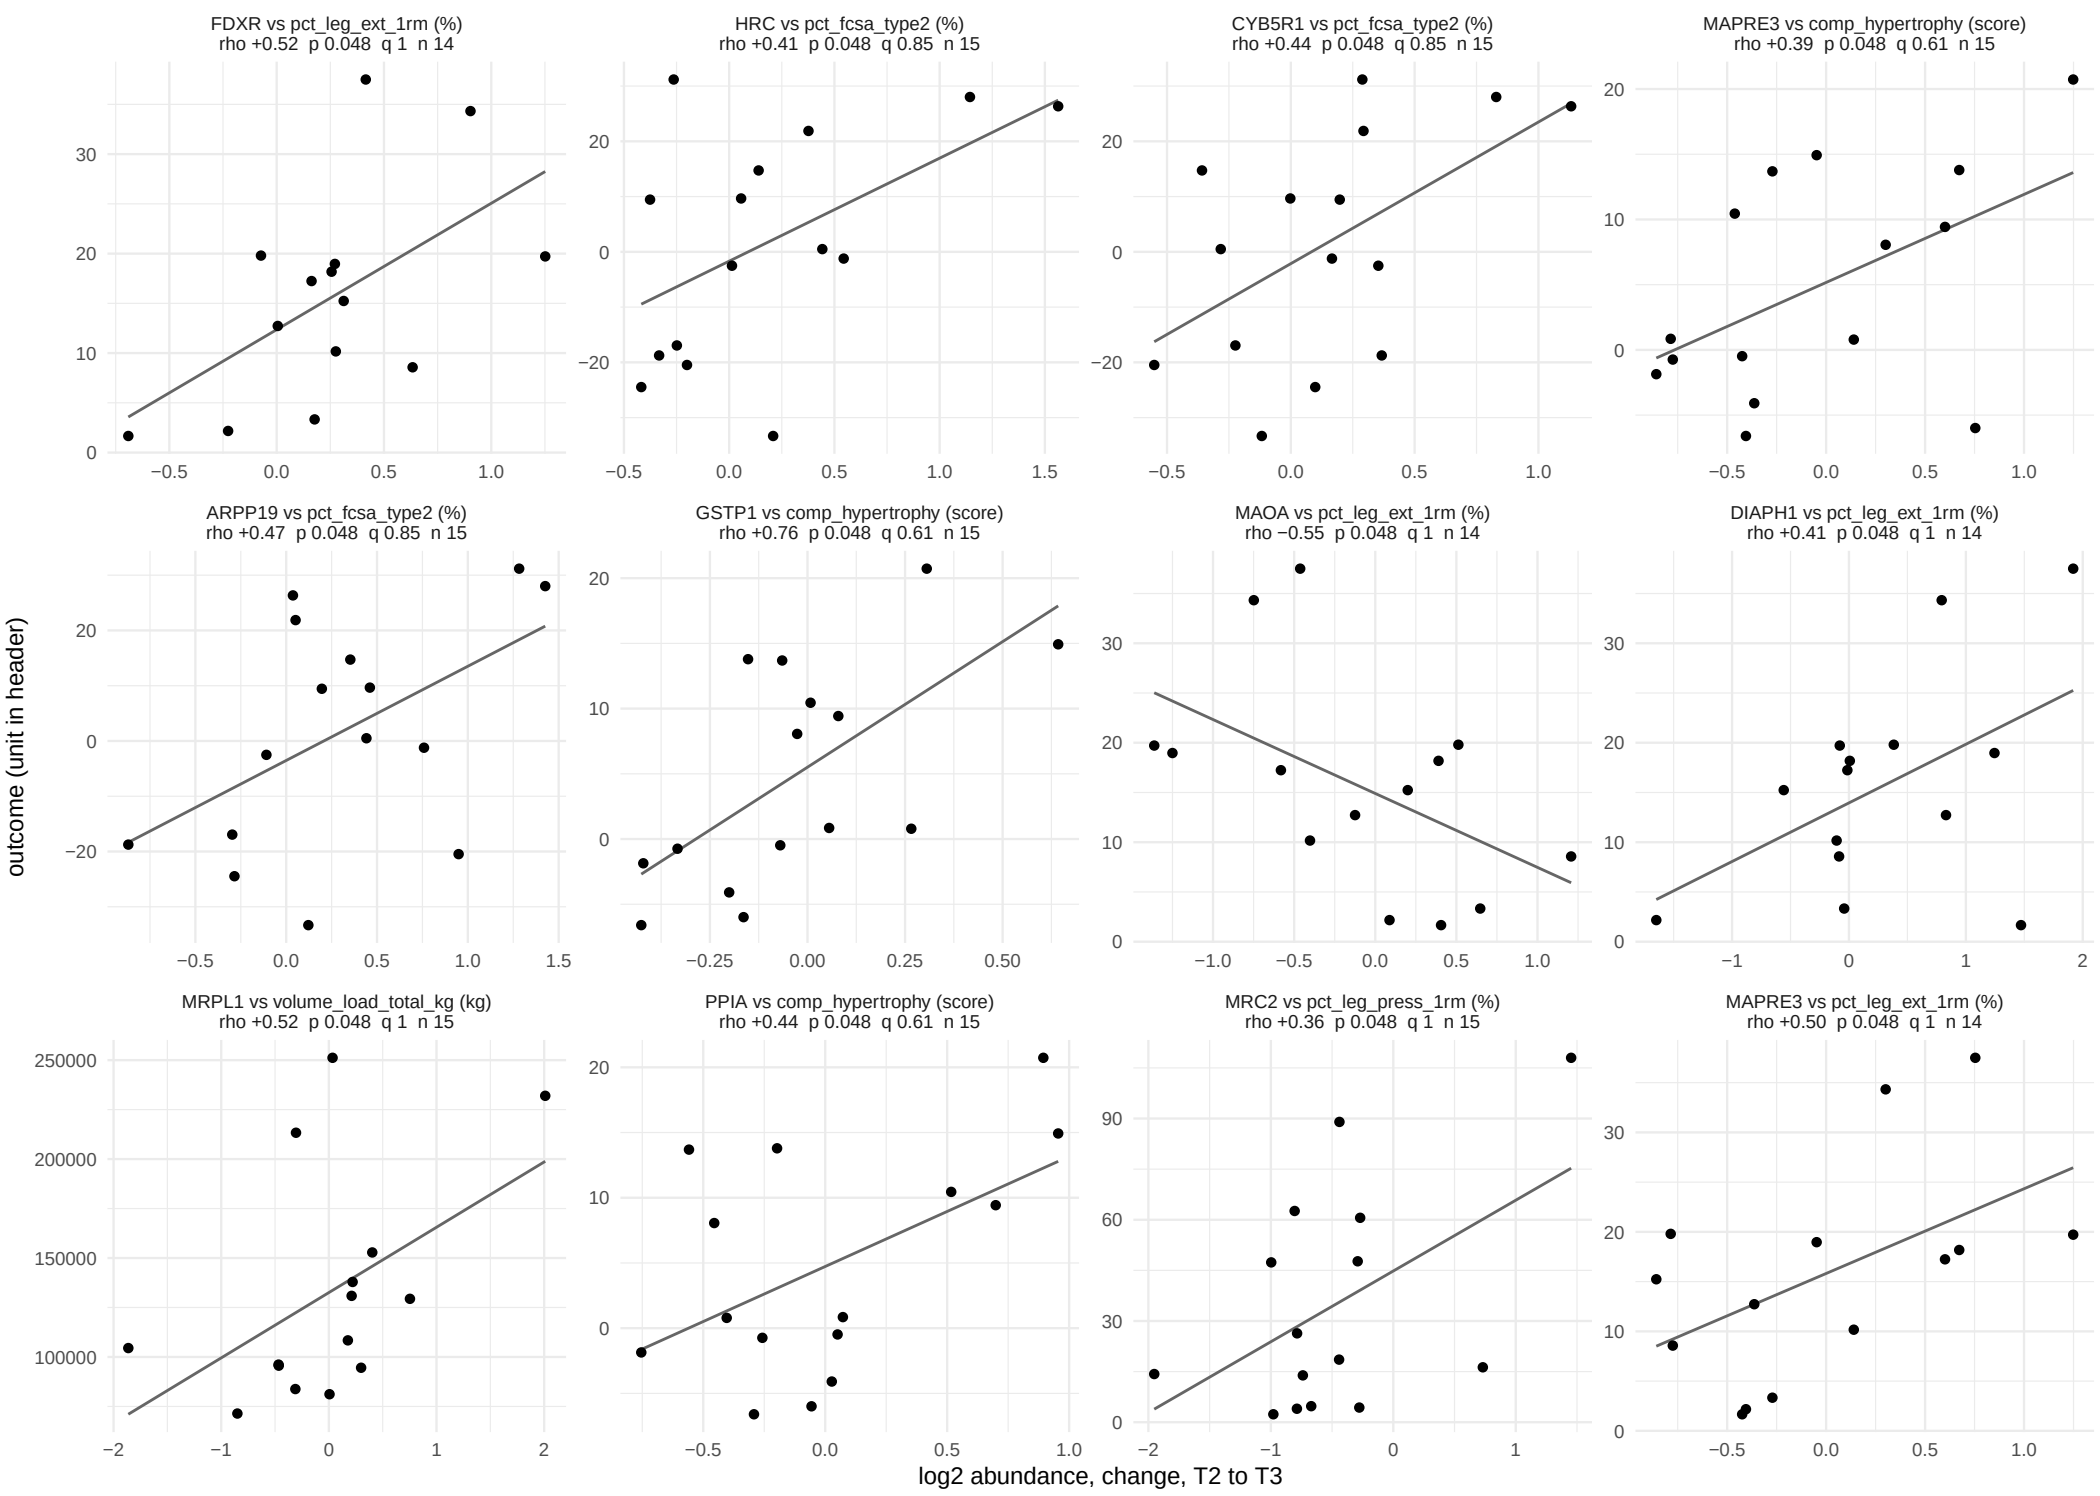

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, acute window


629 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 51 of 53.

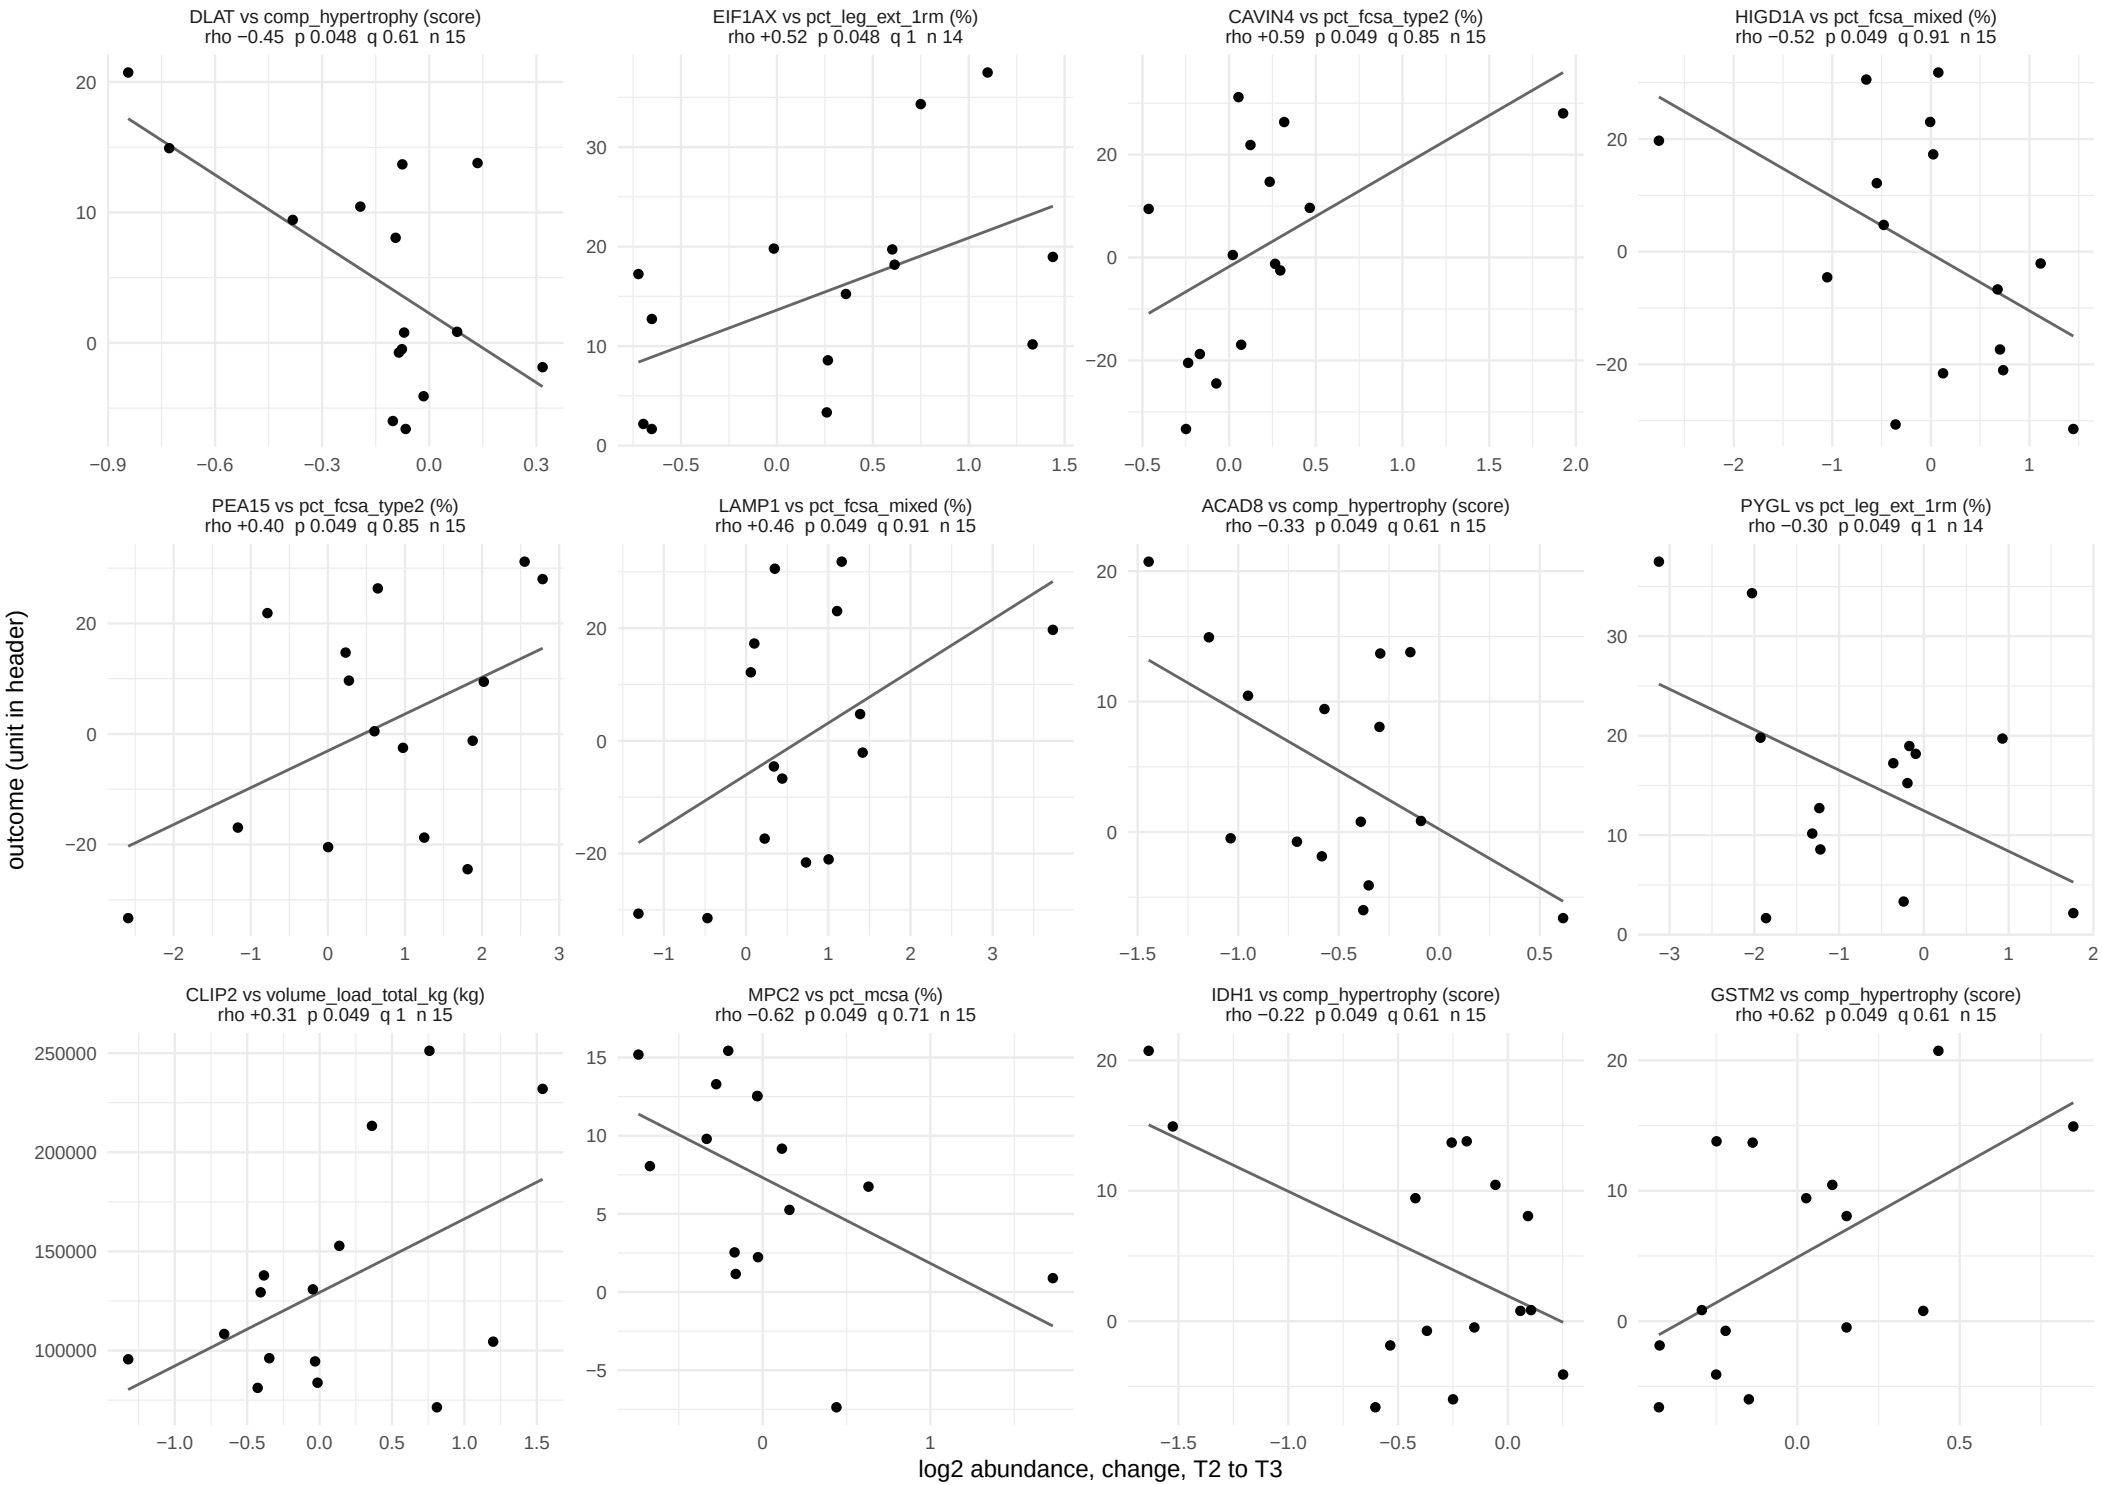

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, acute window


629 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 52 of 53.

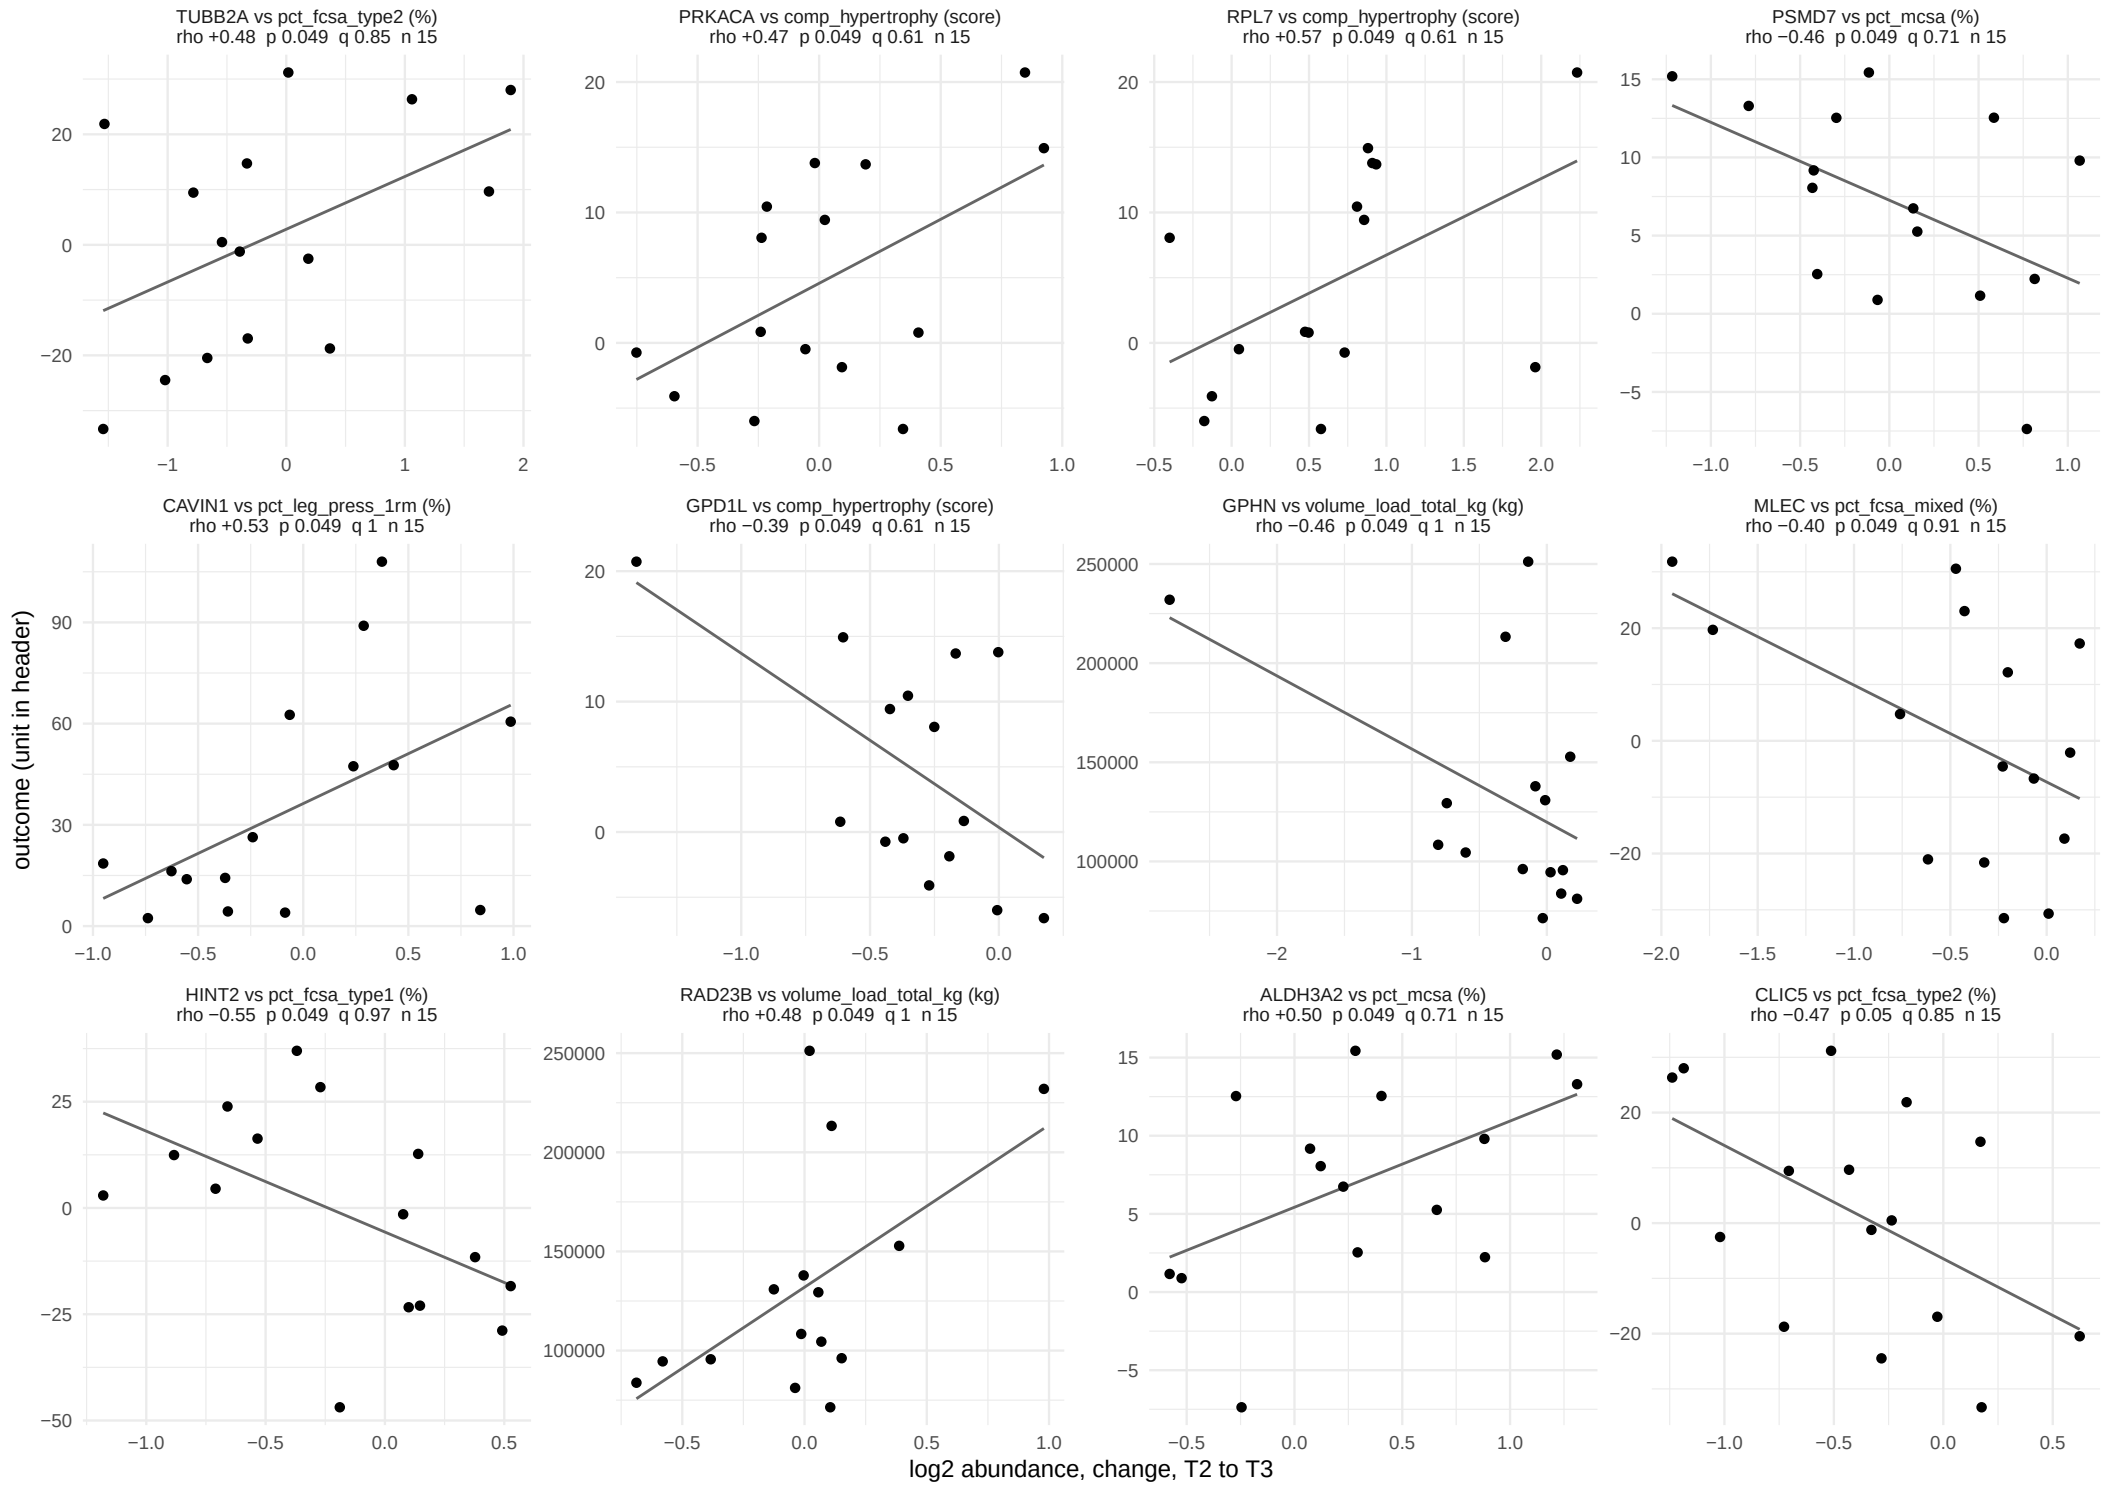

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, acute window


629 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 53 of 53.

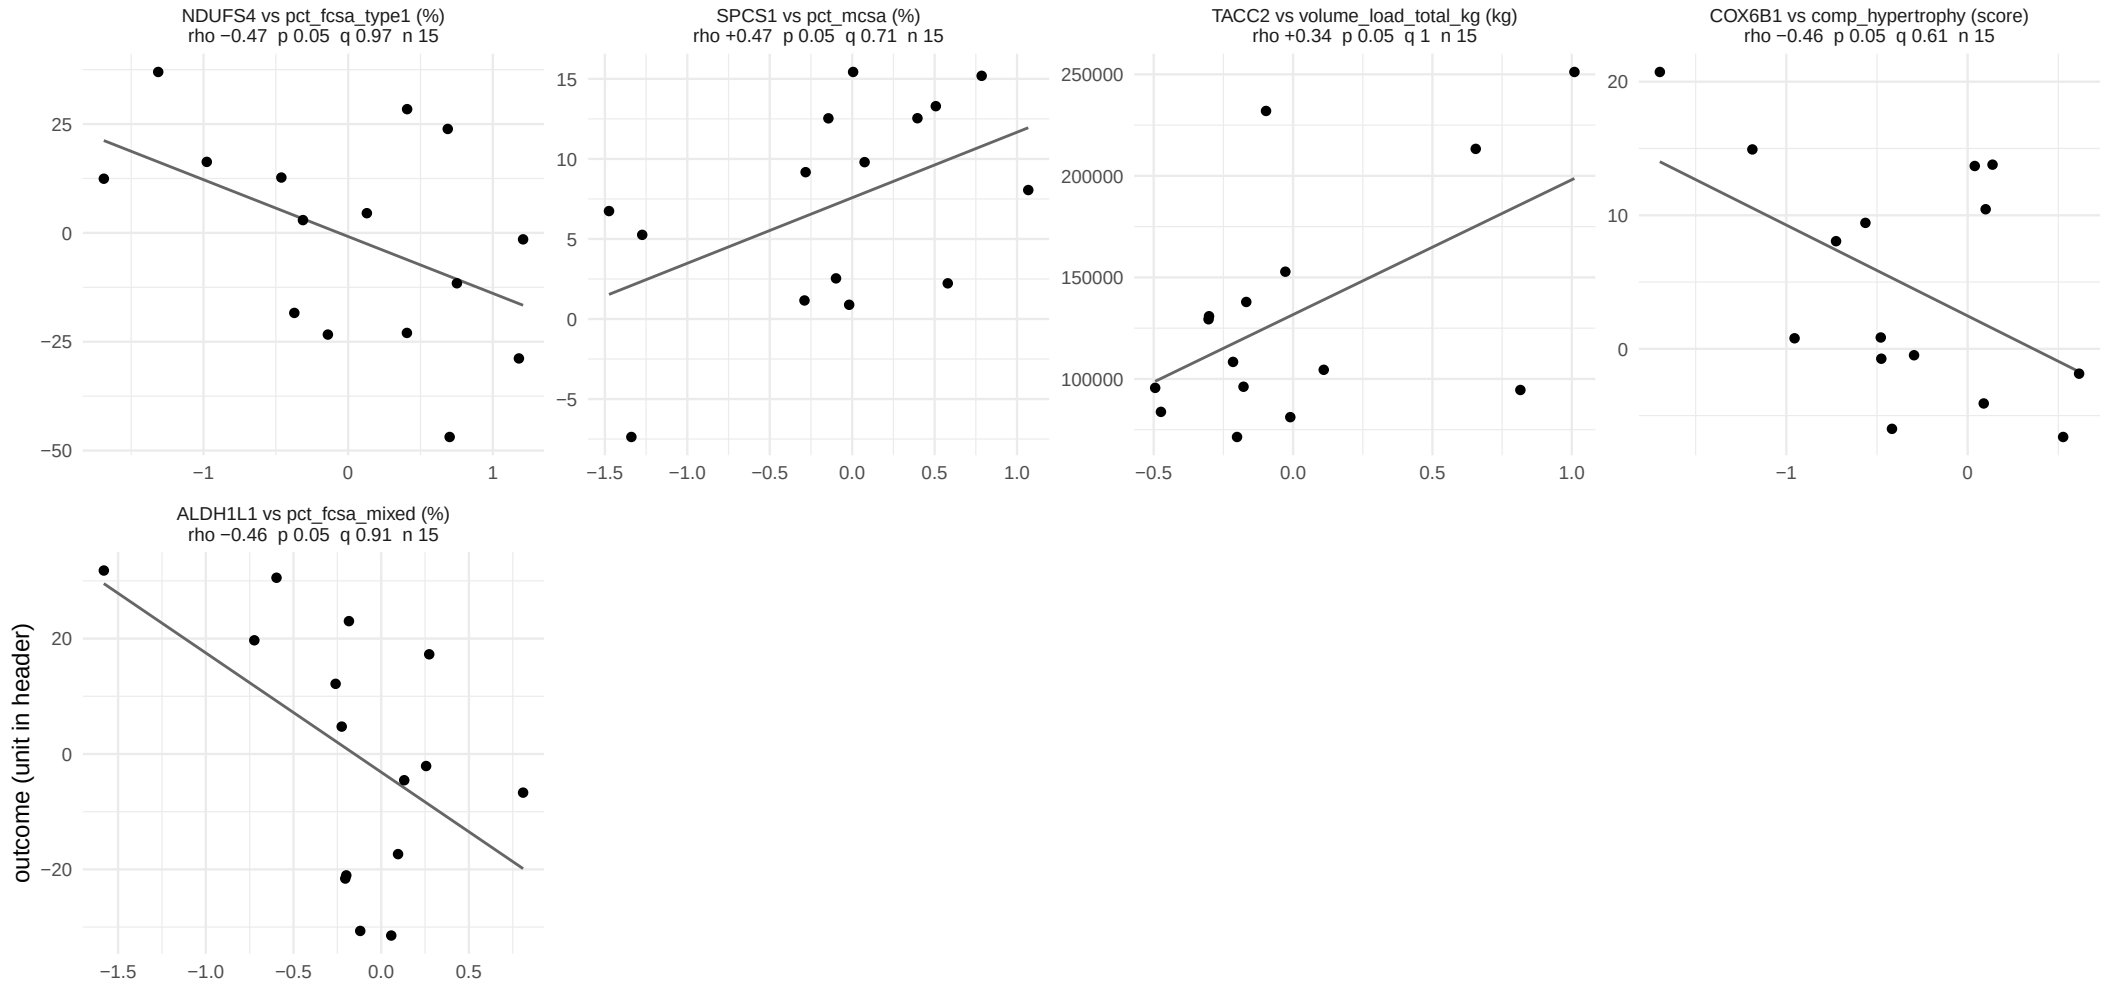

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline_level window


704 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 1 of 59.

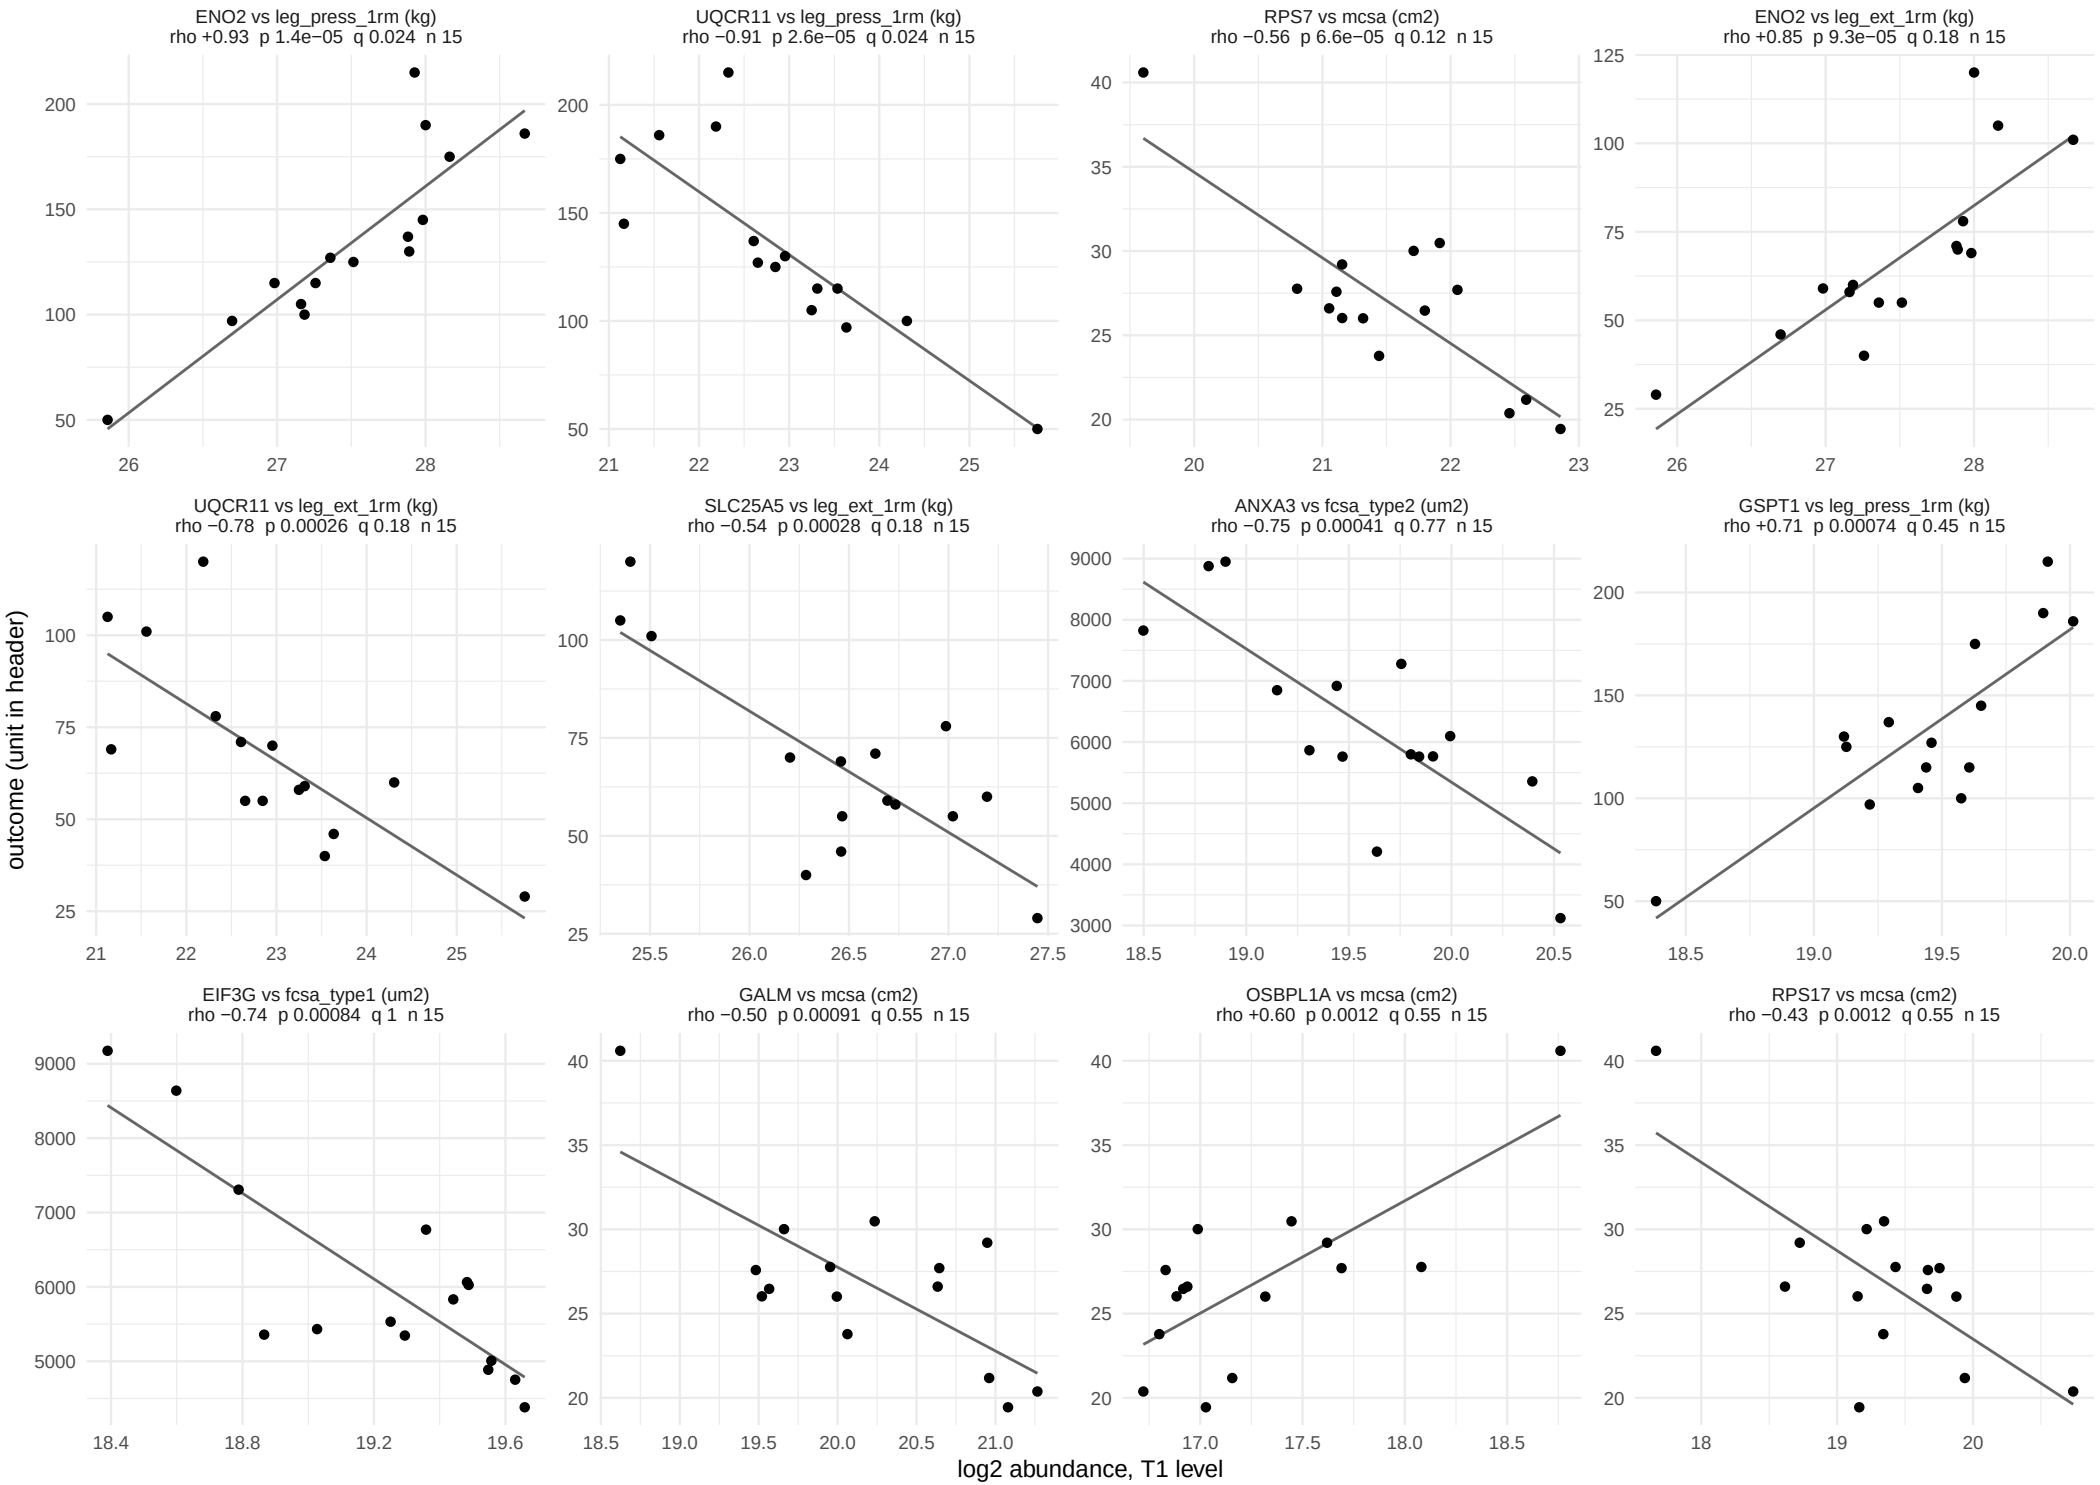

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline_level window


704 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 2 of 59.

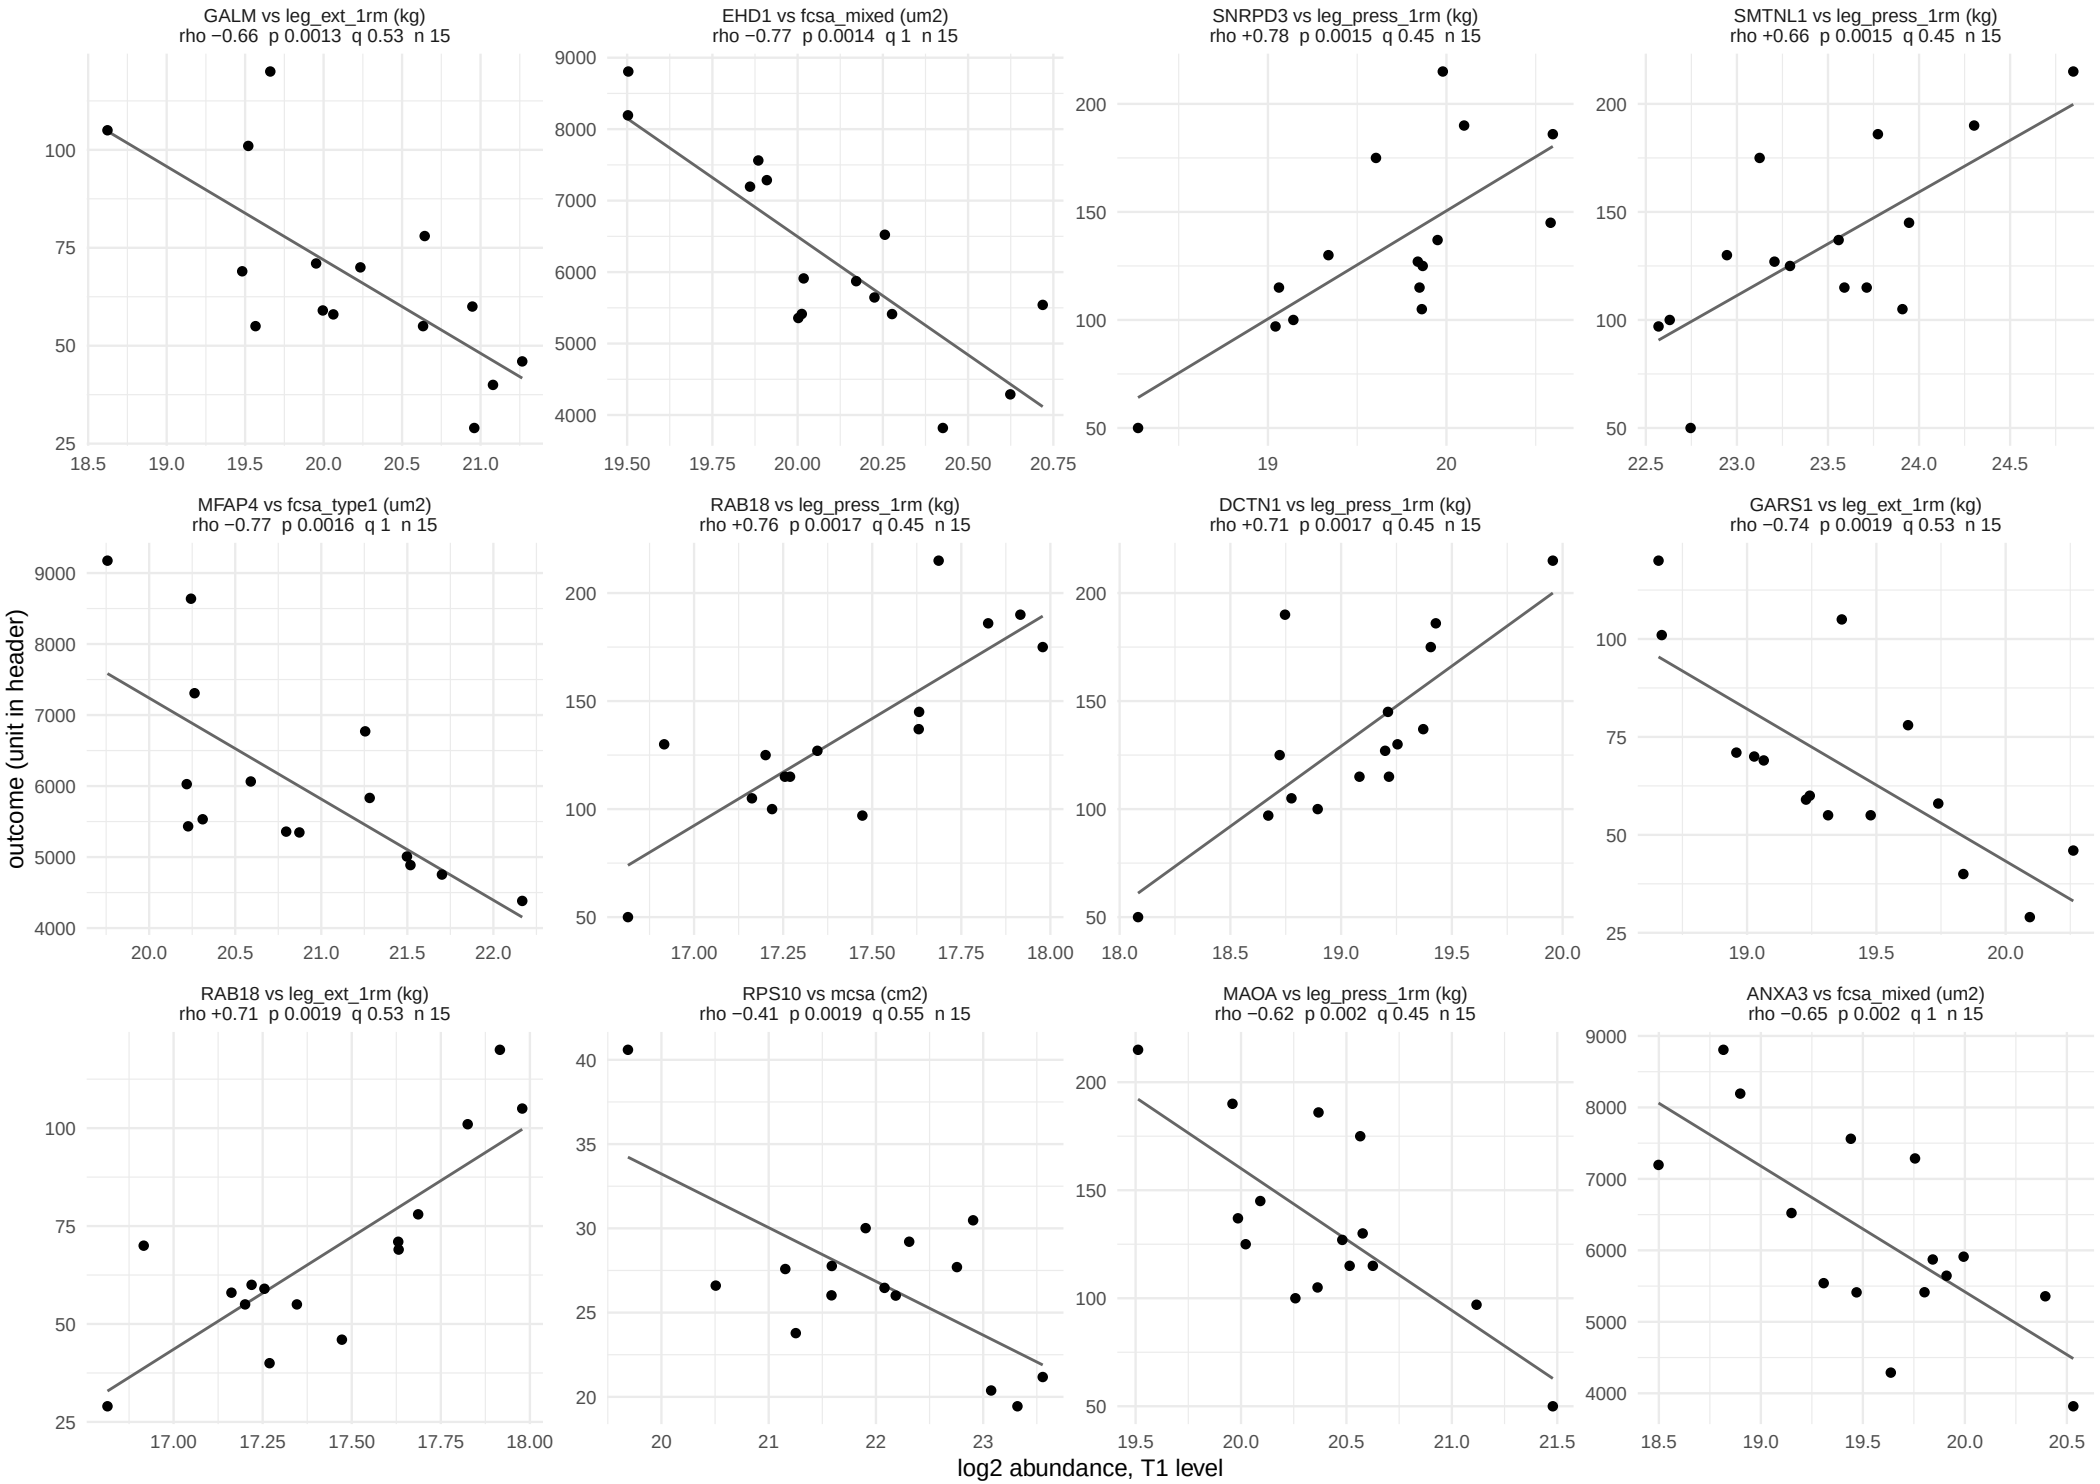

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline_level window


704 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 3 of 59.

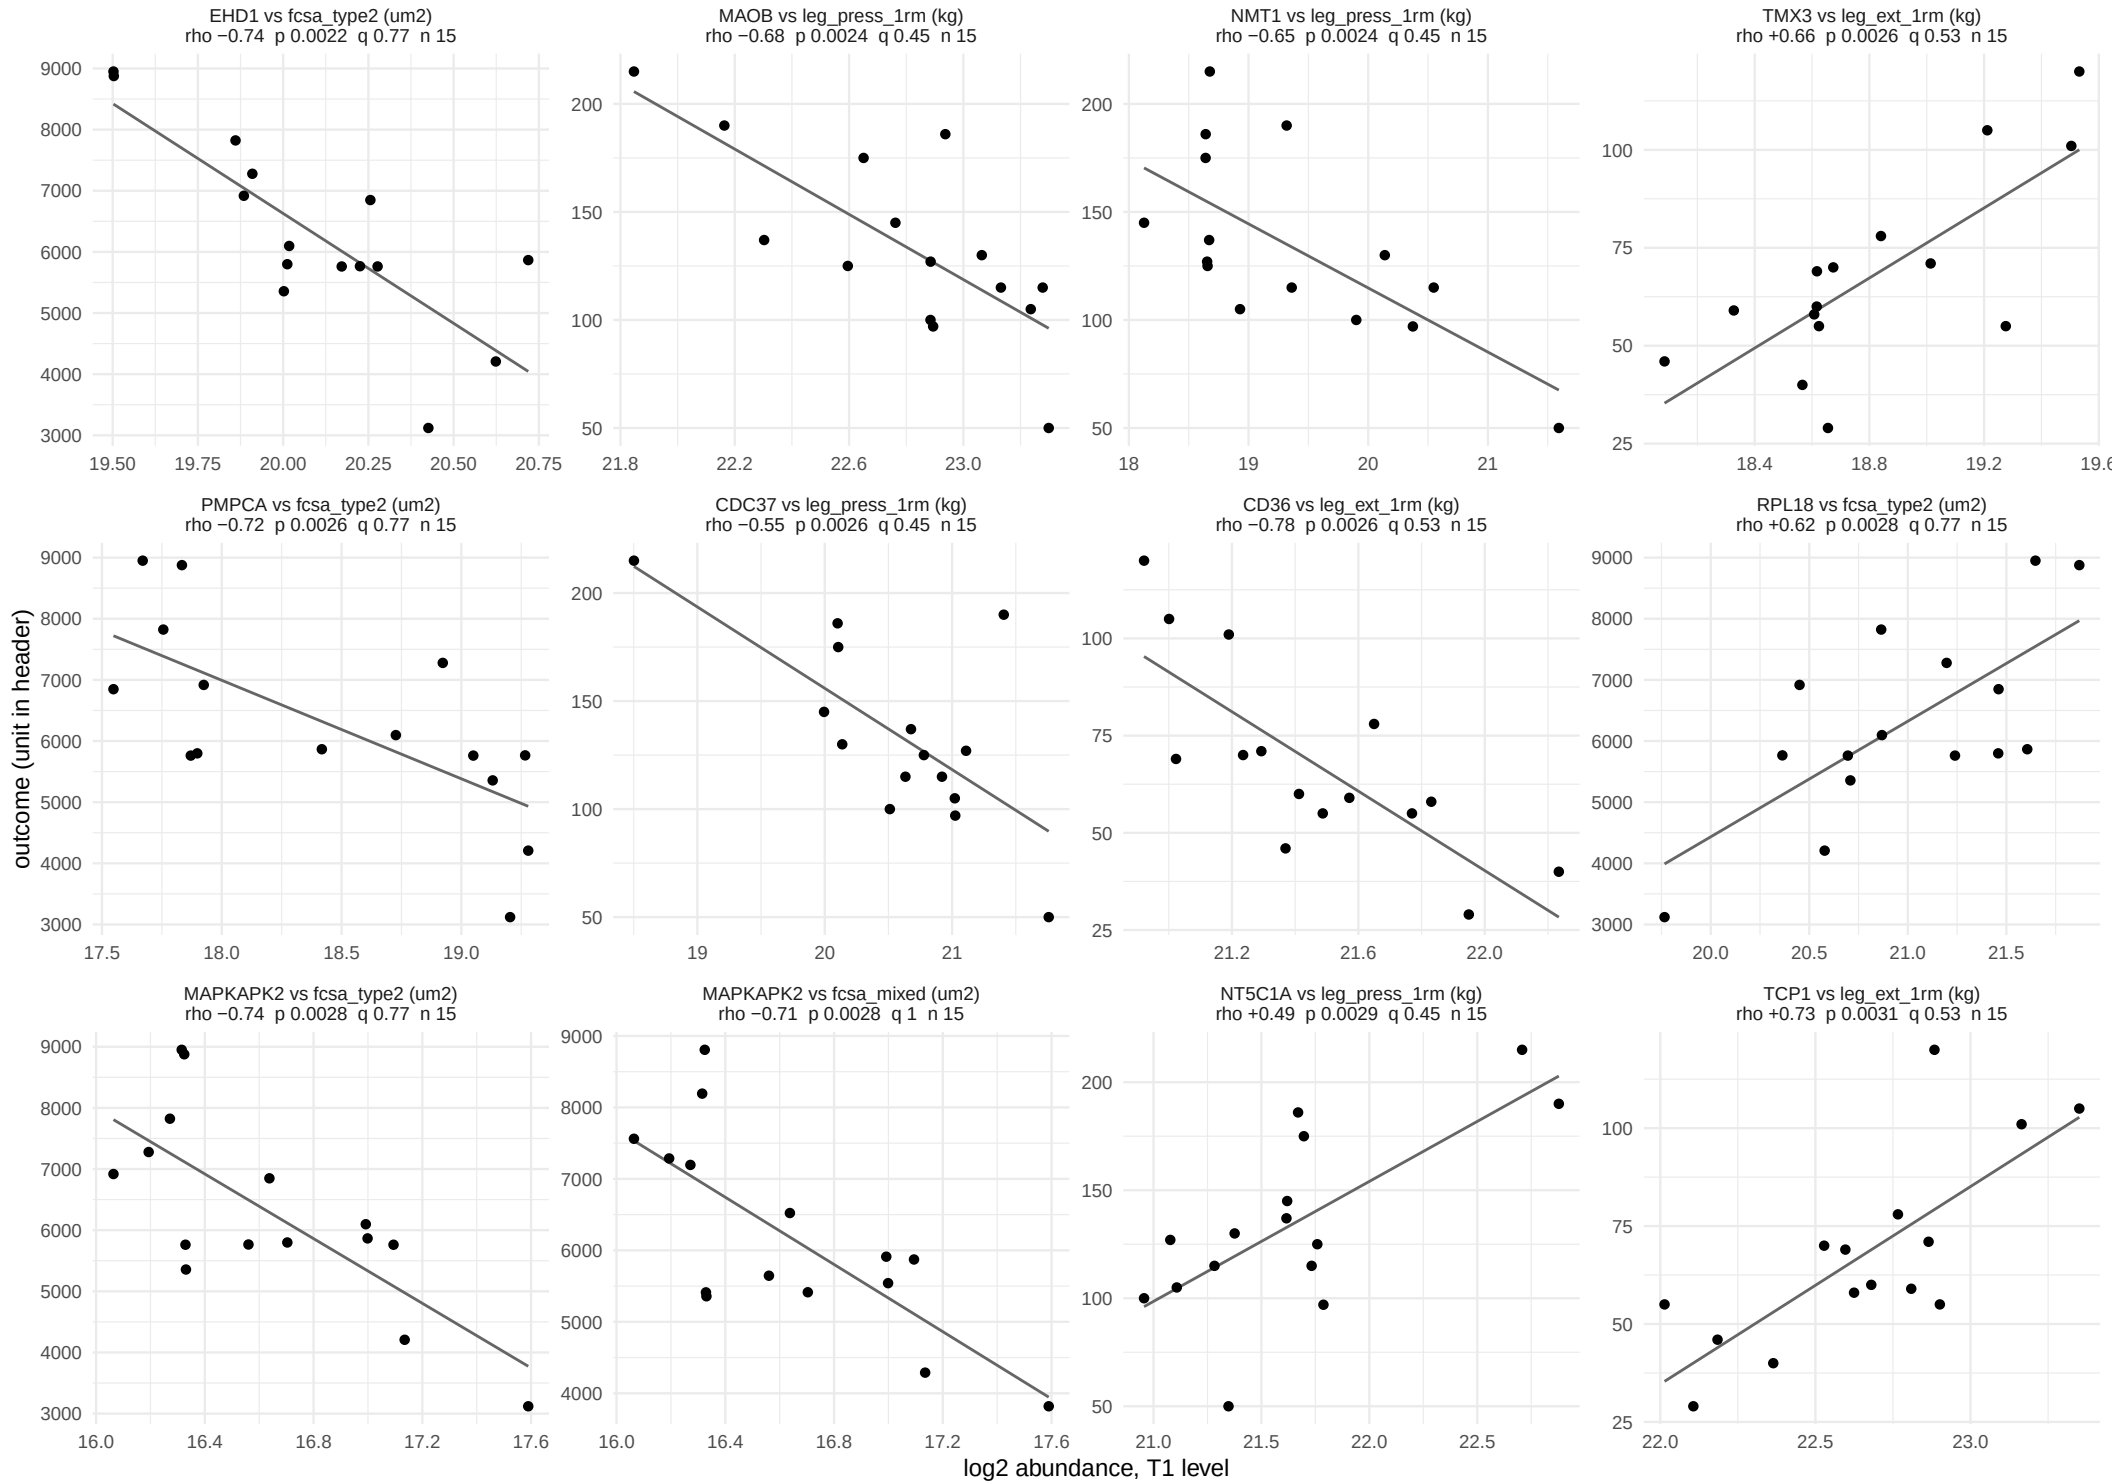

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline_level window


704 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 4 of 59.

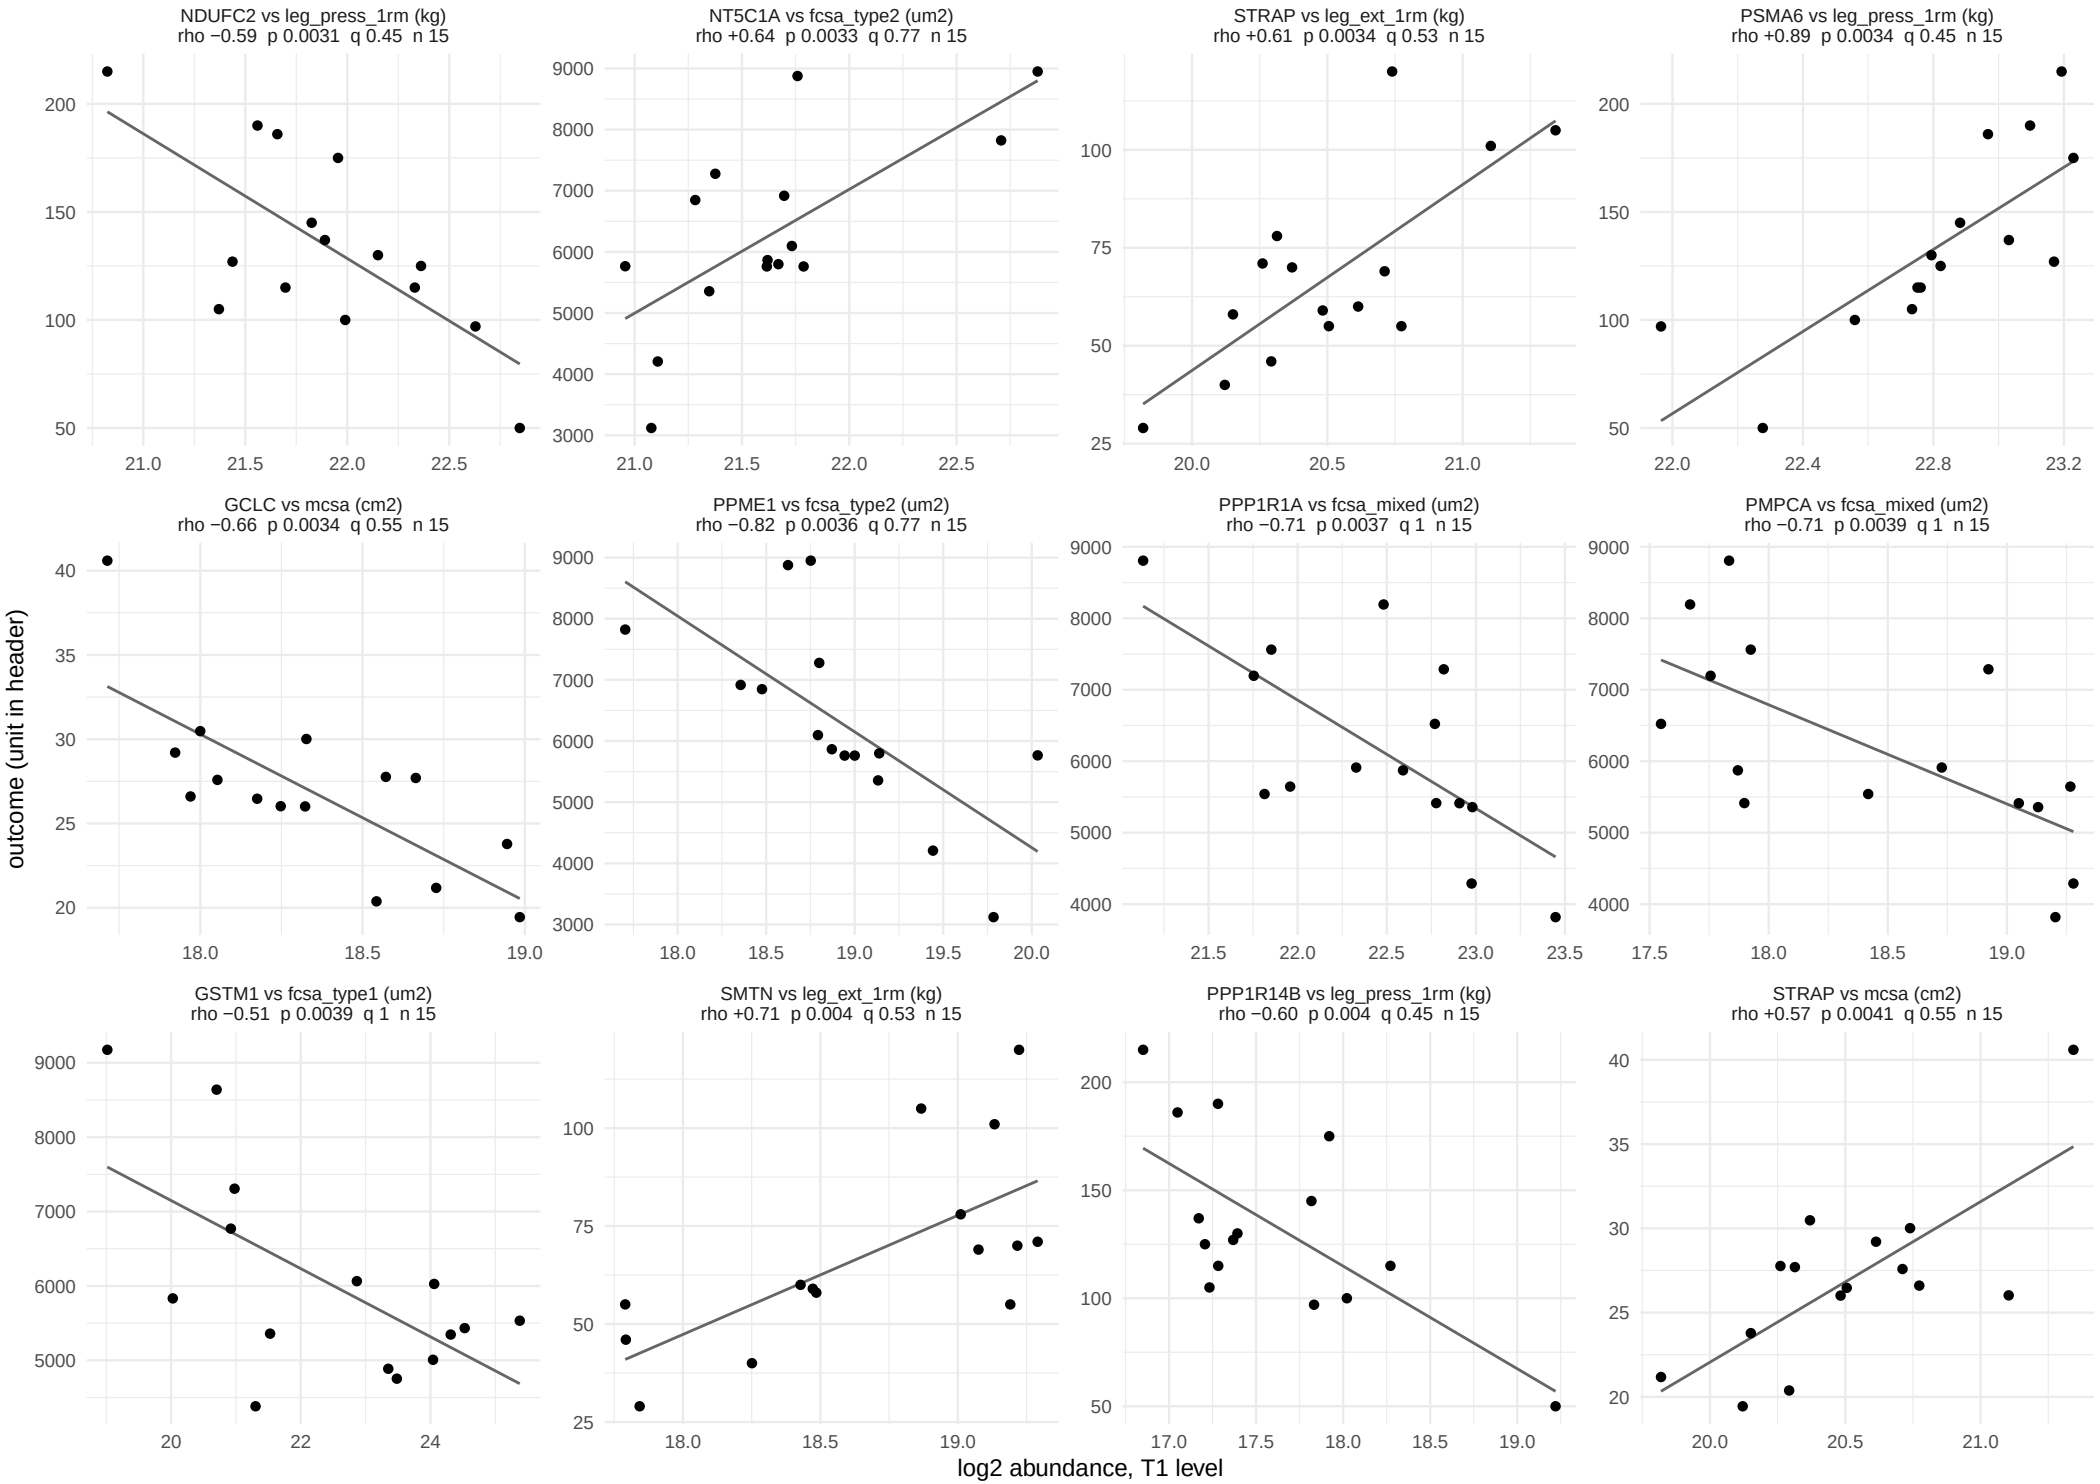

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline_level window


704 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 5 of 59.

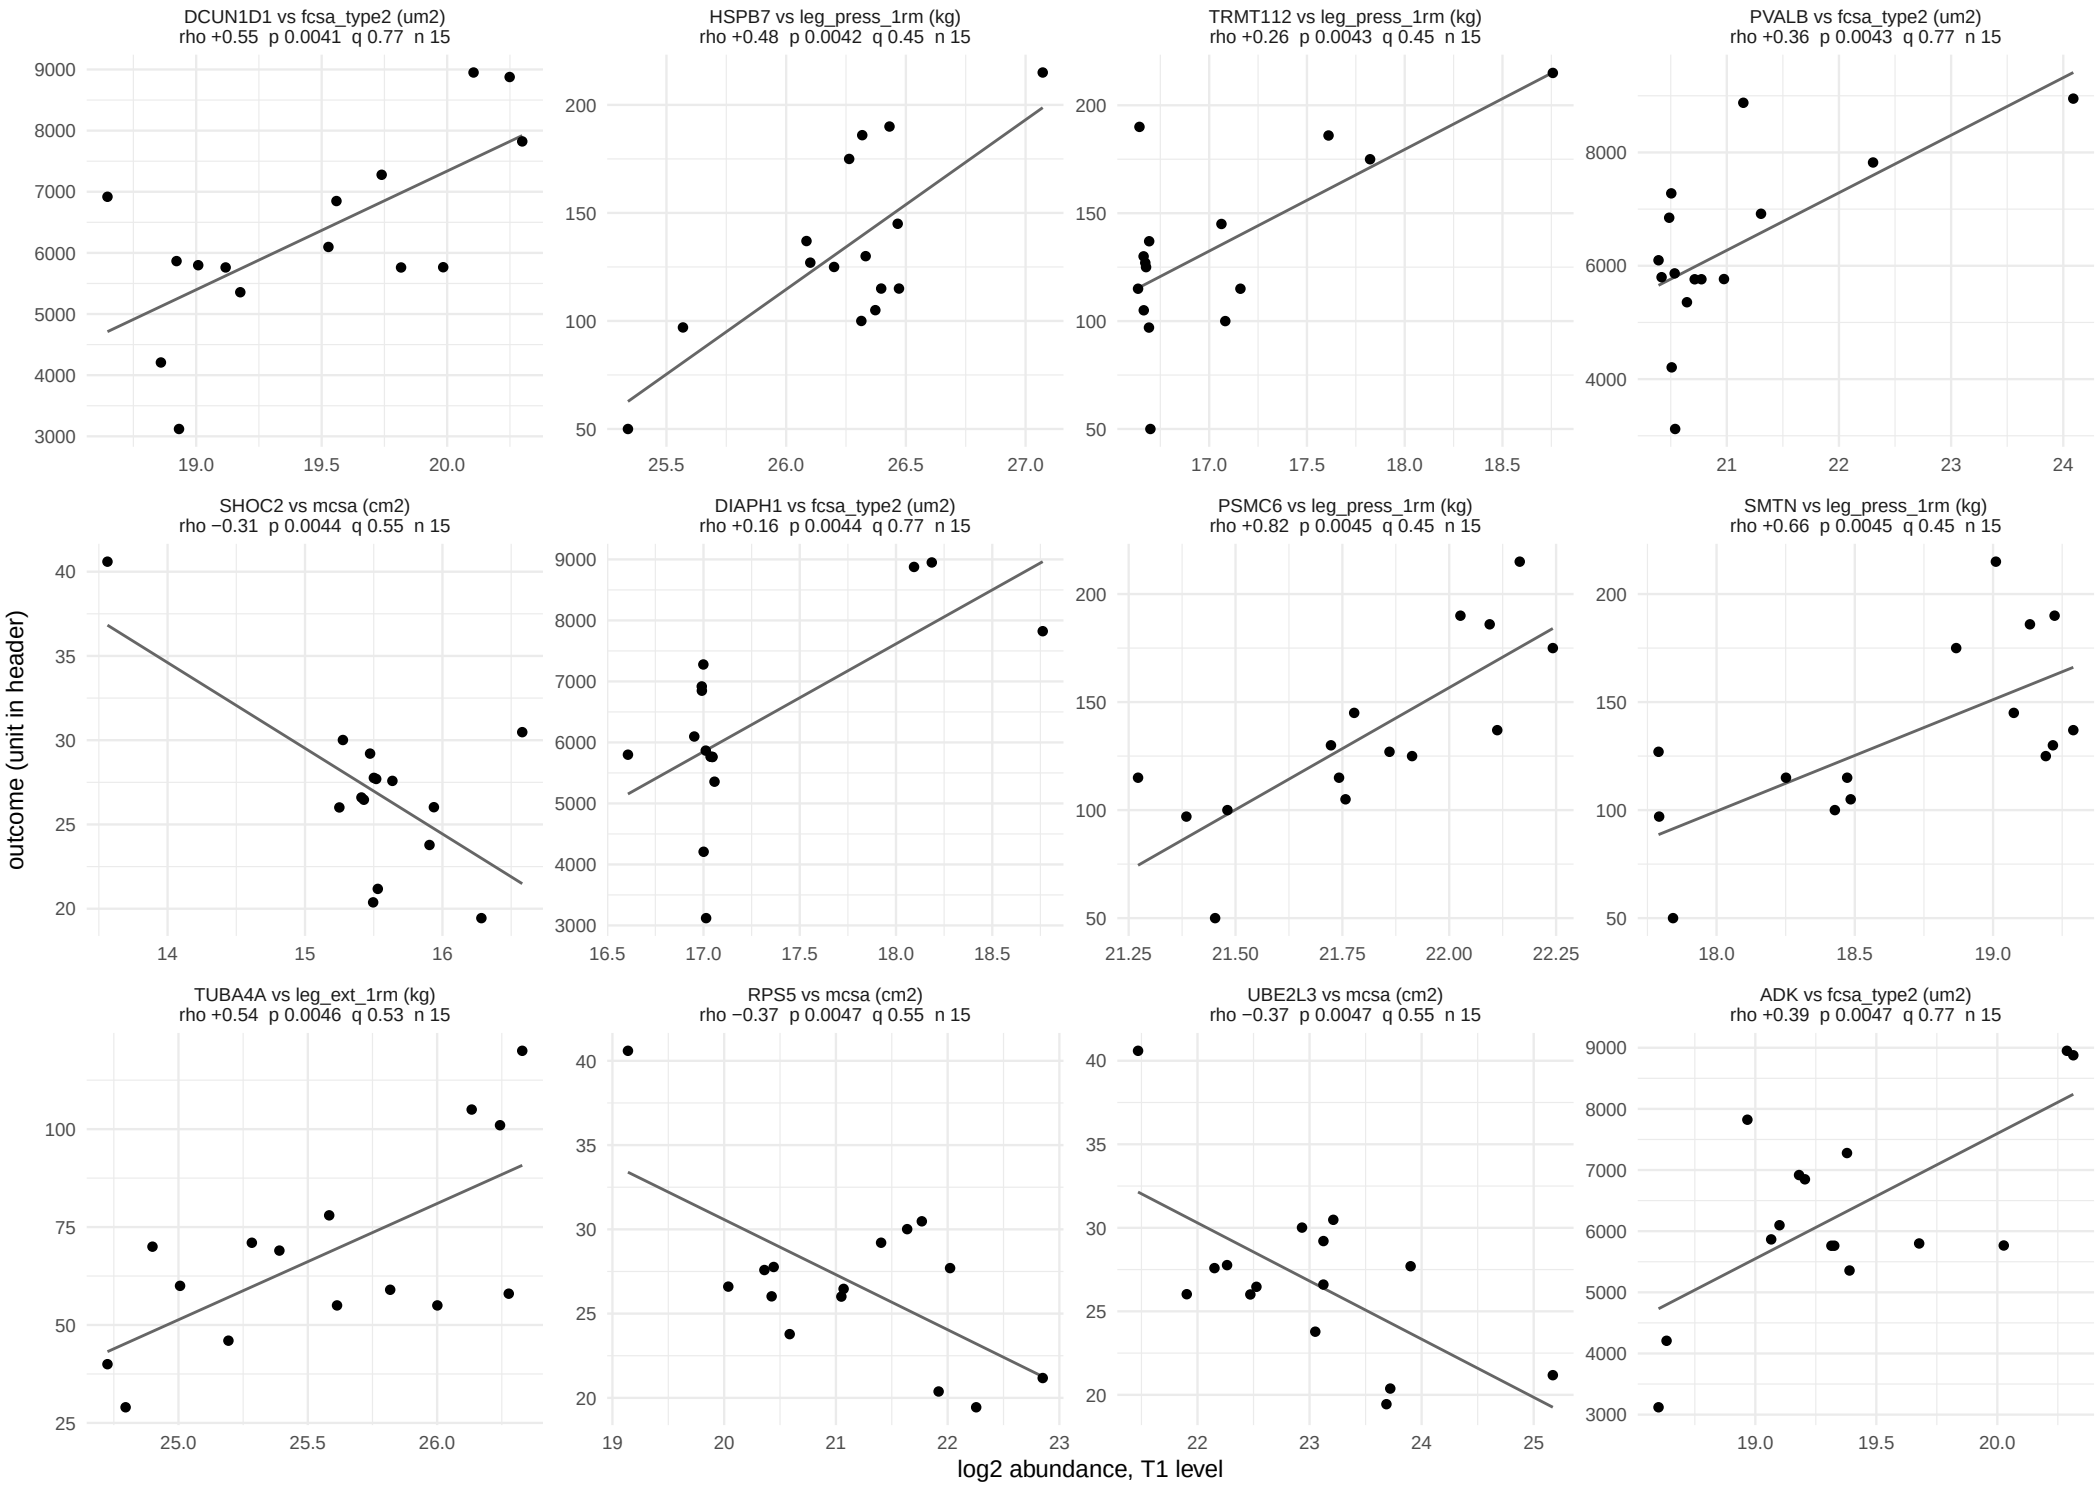

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline_level window


704 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 6 of 59.

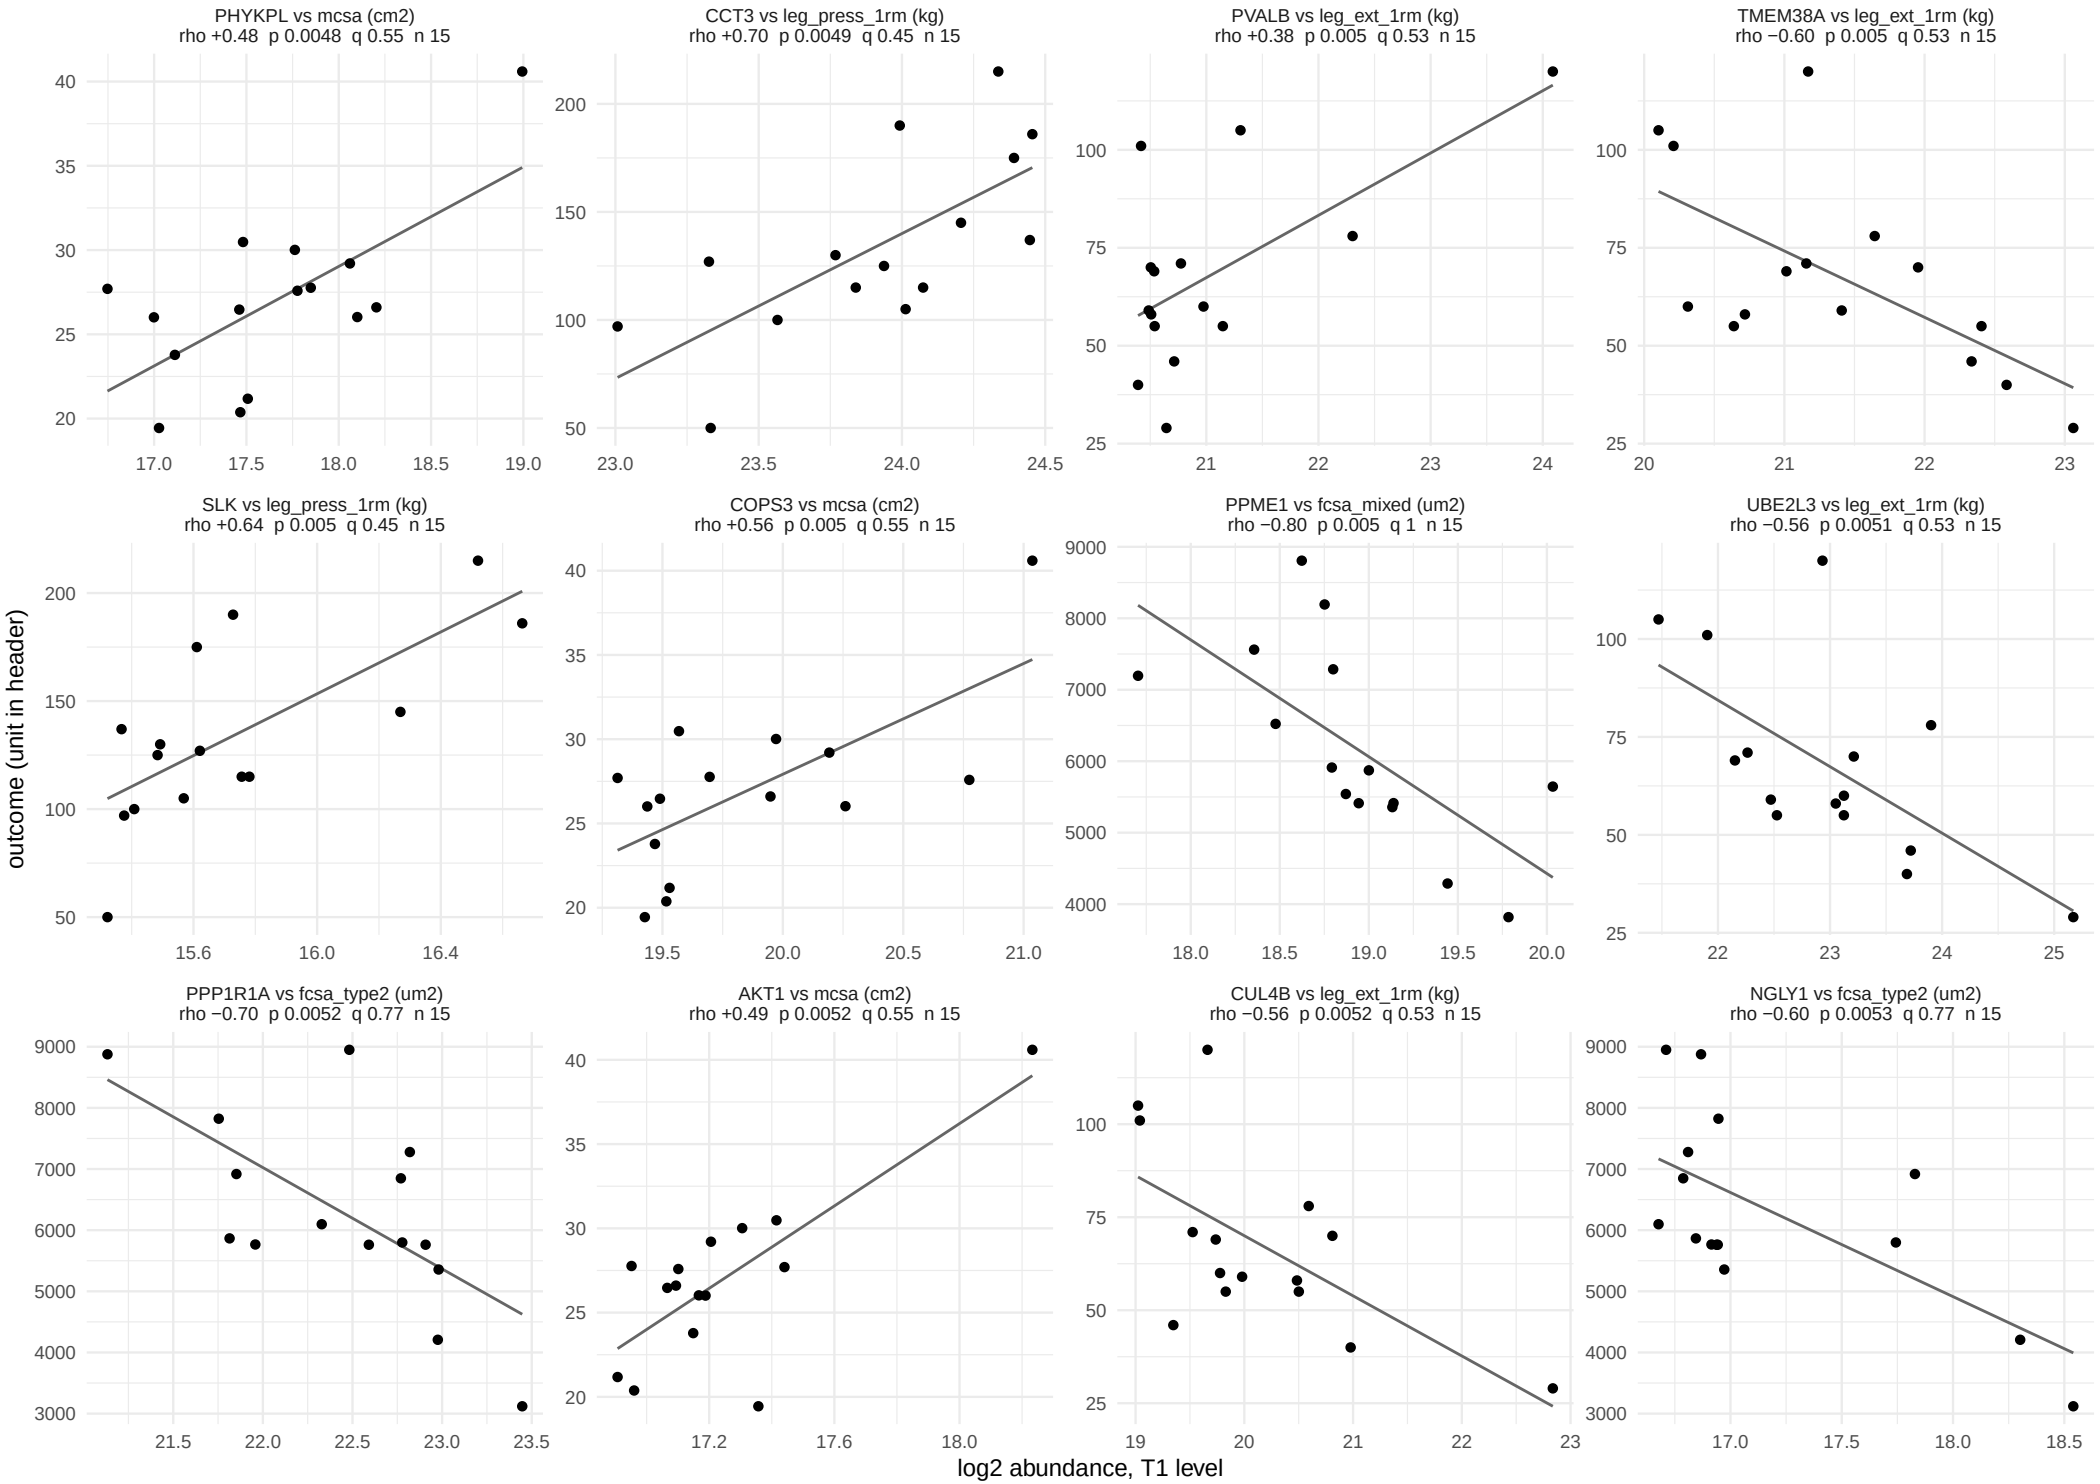

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline_level window


704 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 7 of 59.

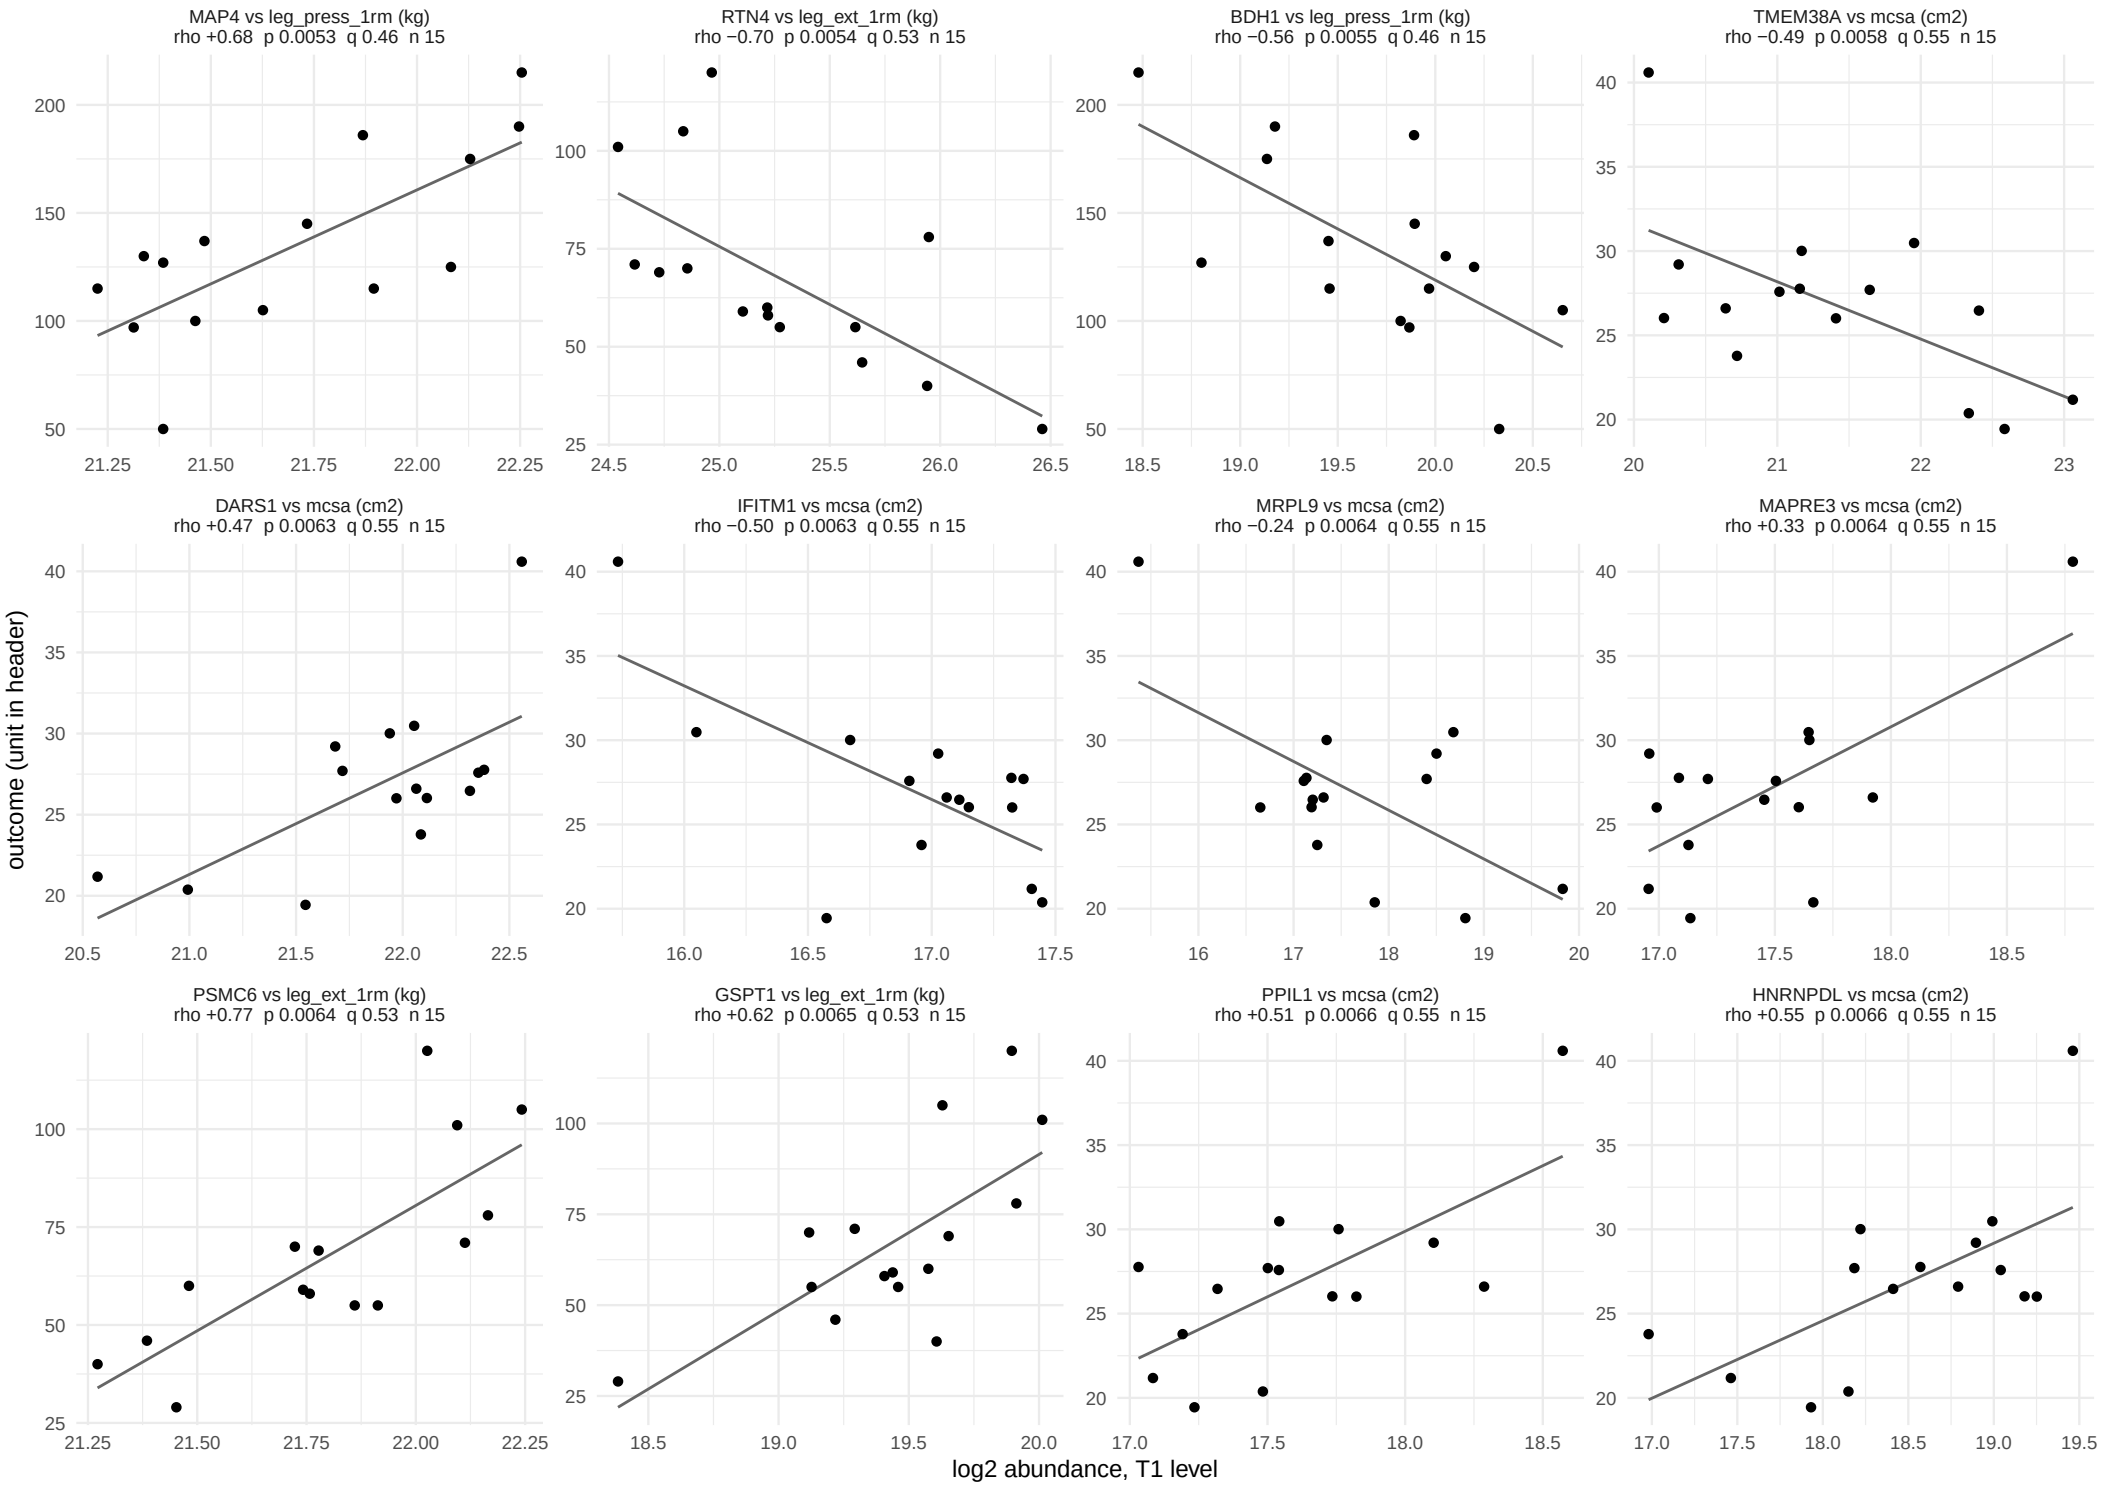

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline_level window


704 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 8 of 59.

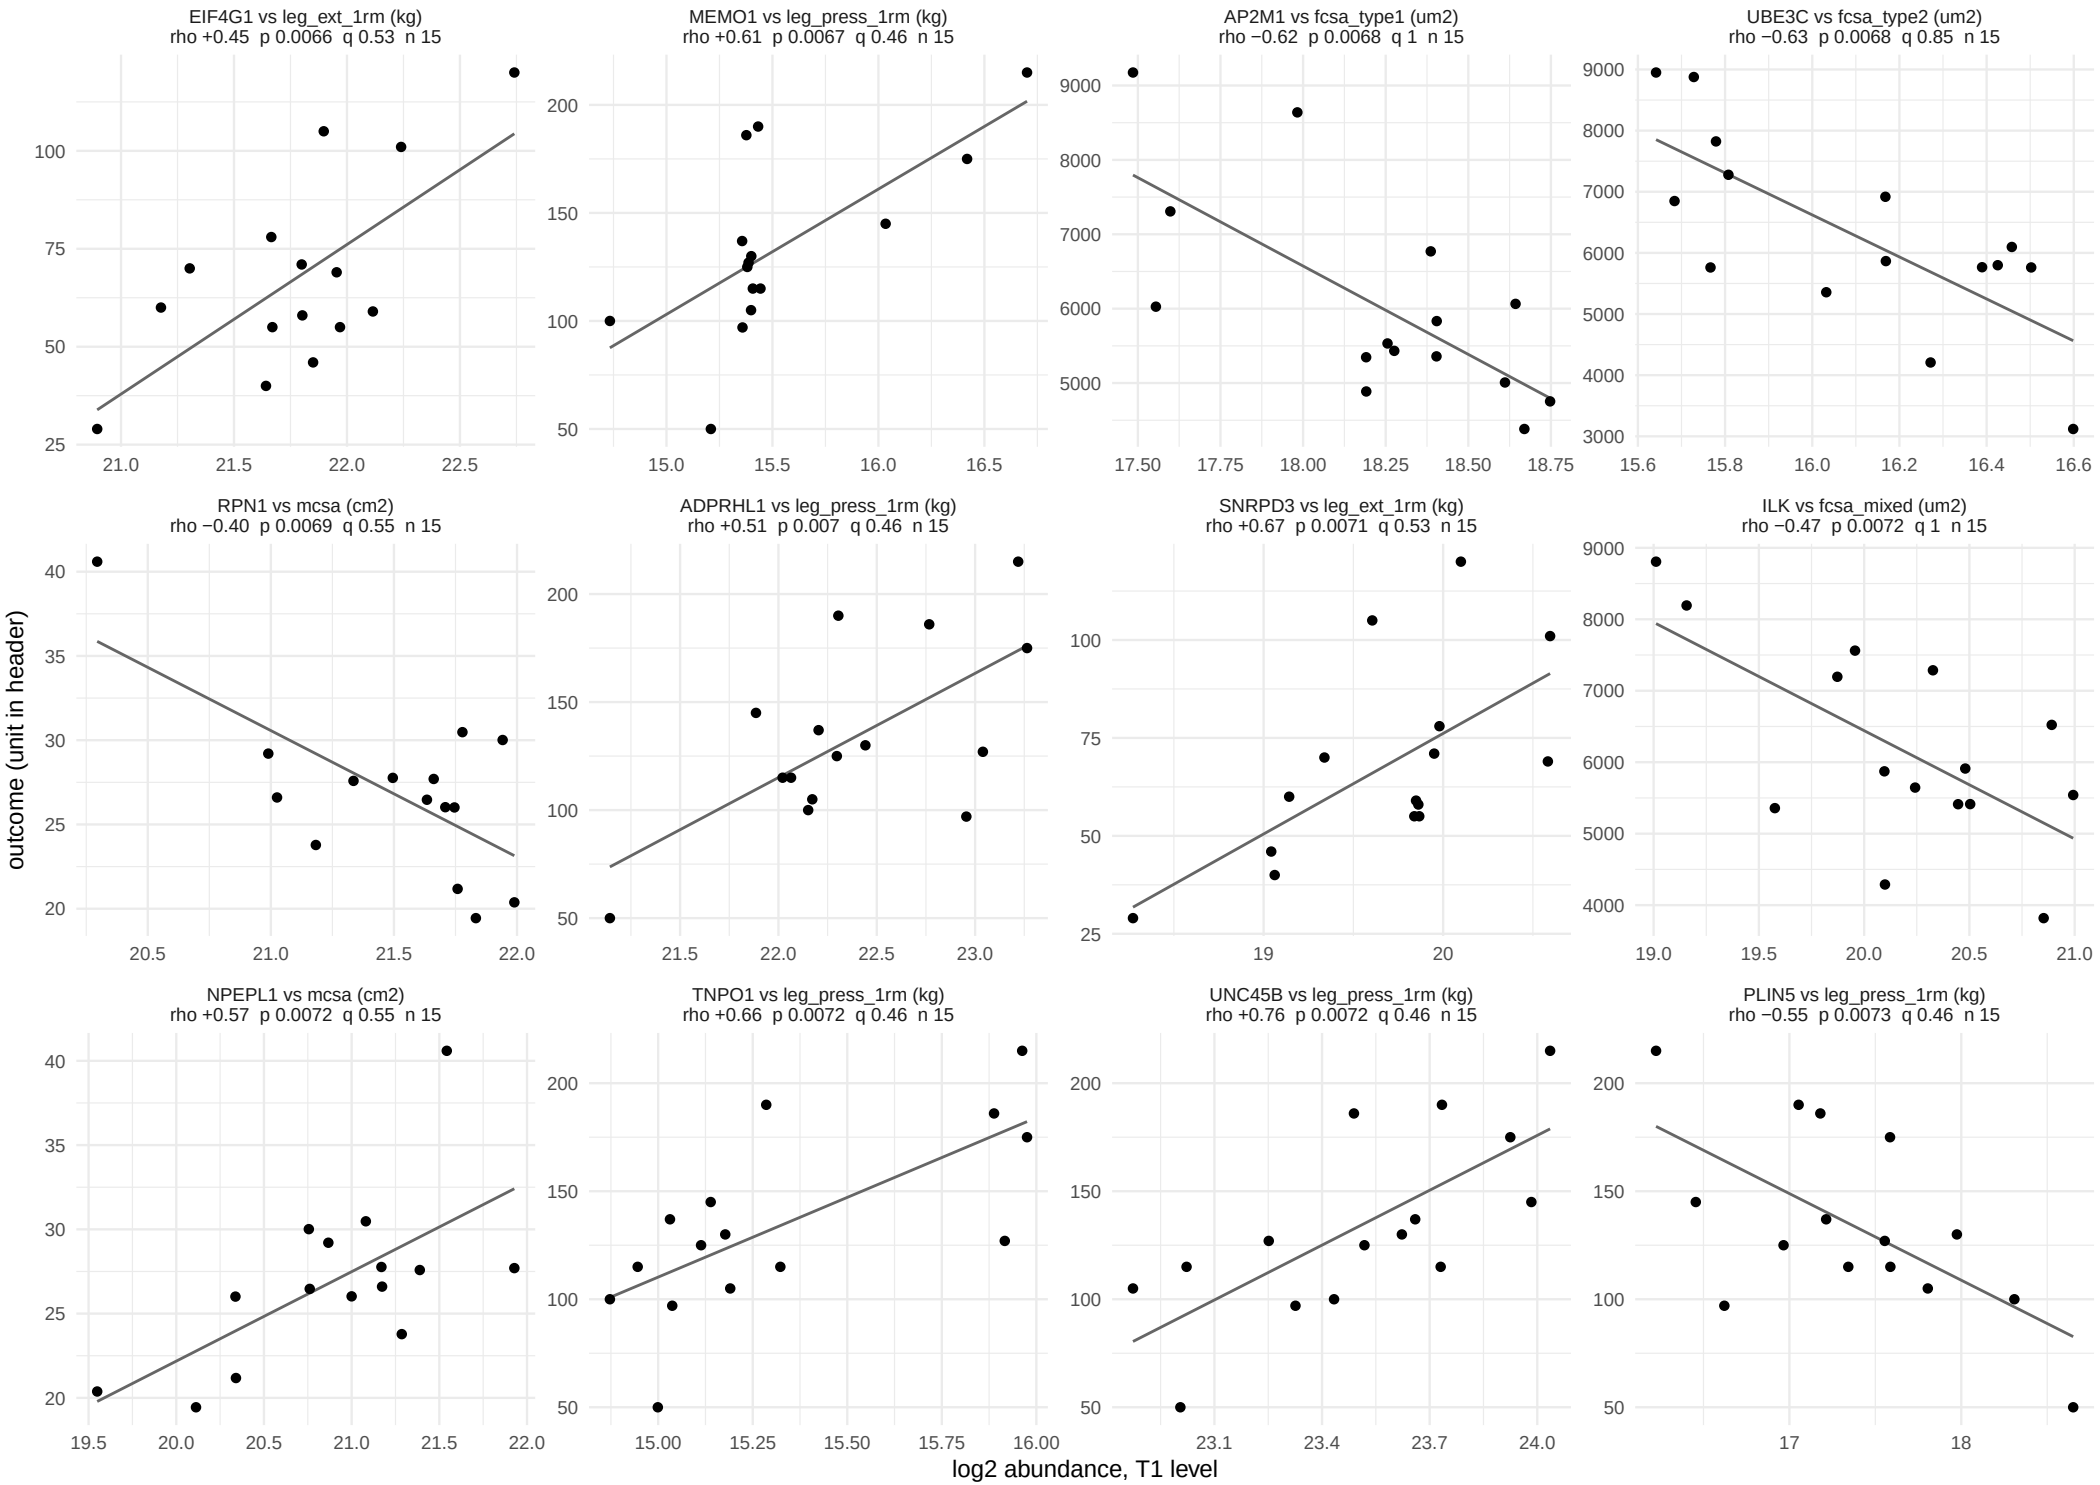

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline_level window


704 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 9 of 59.

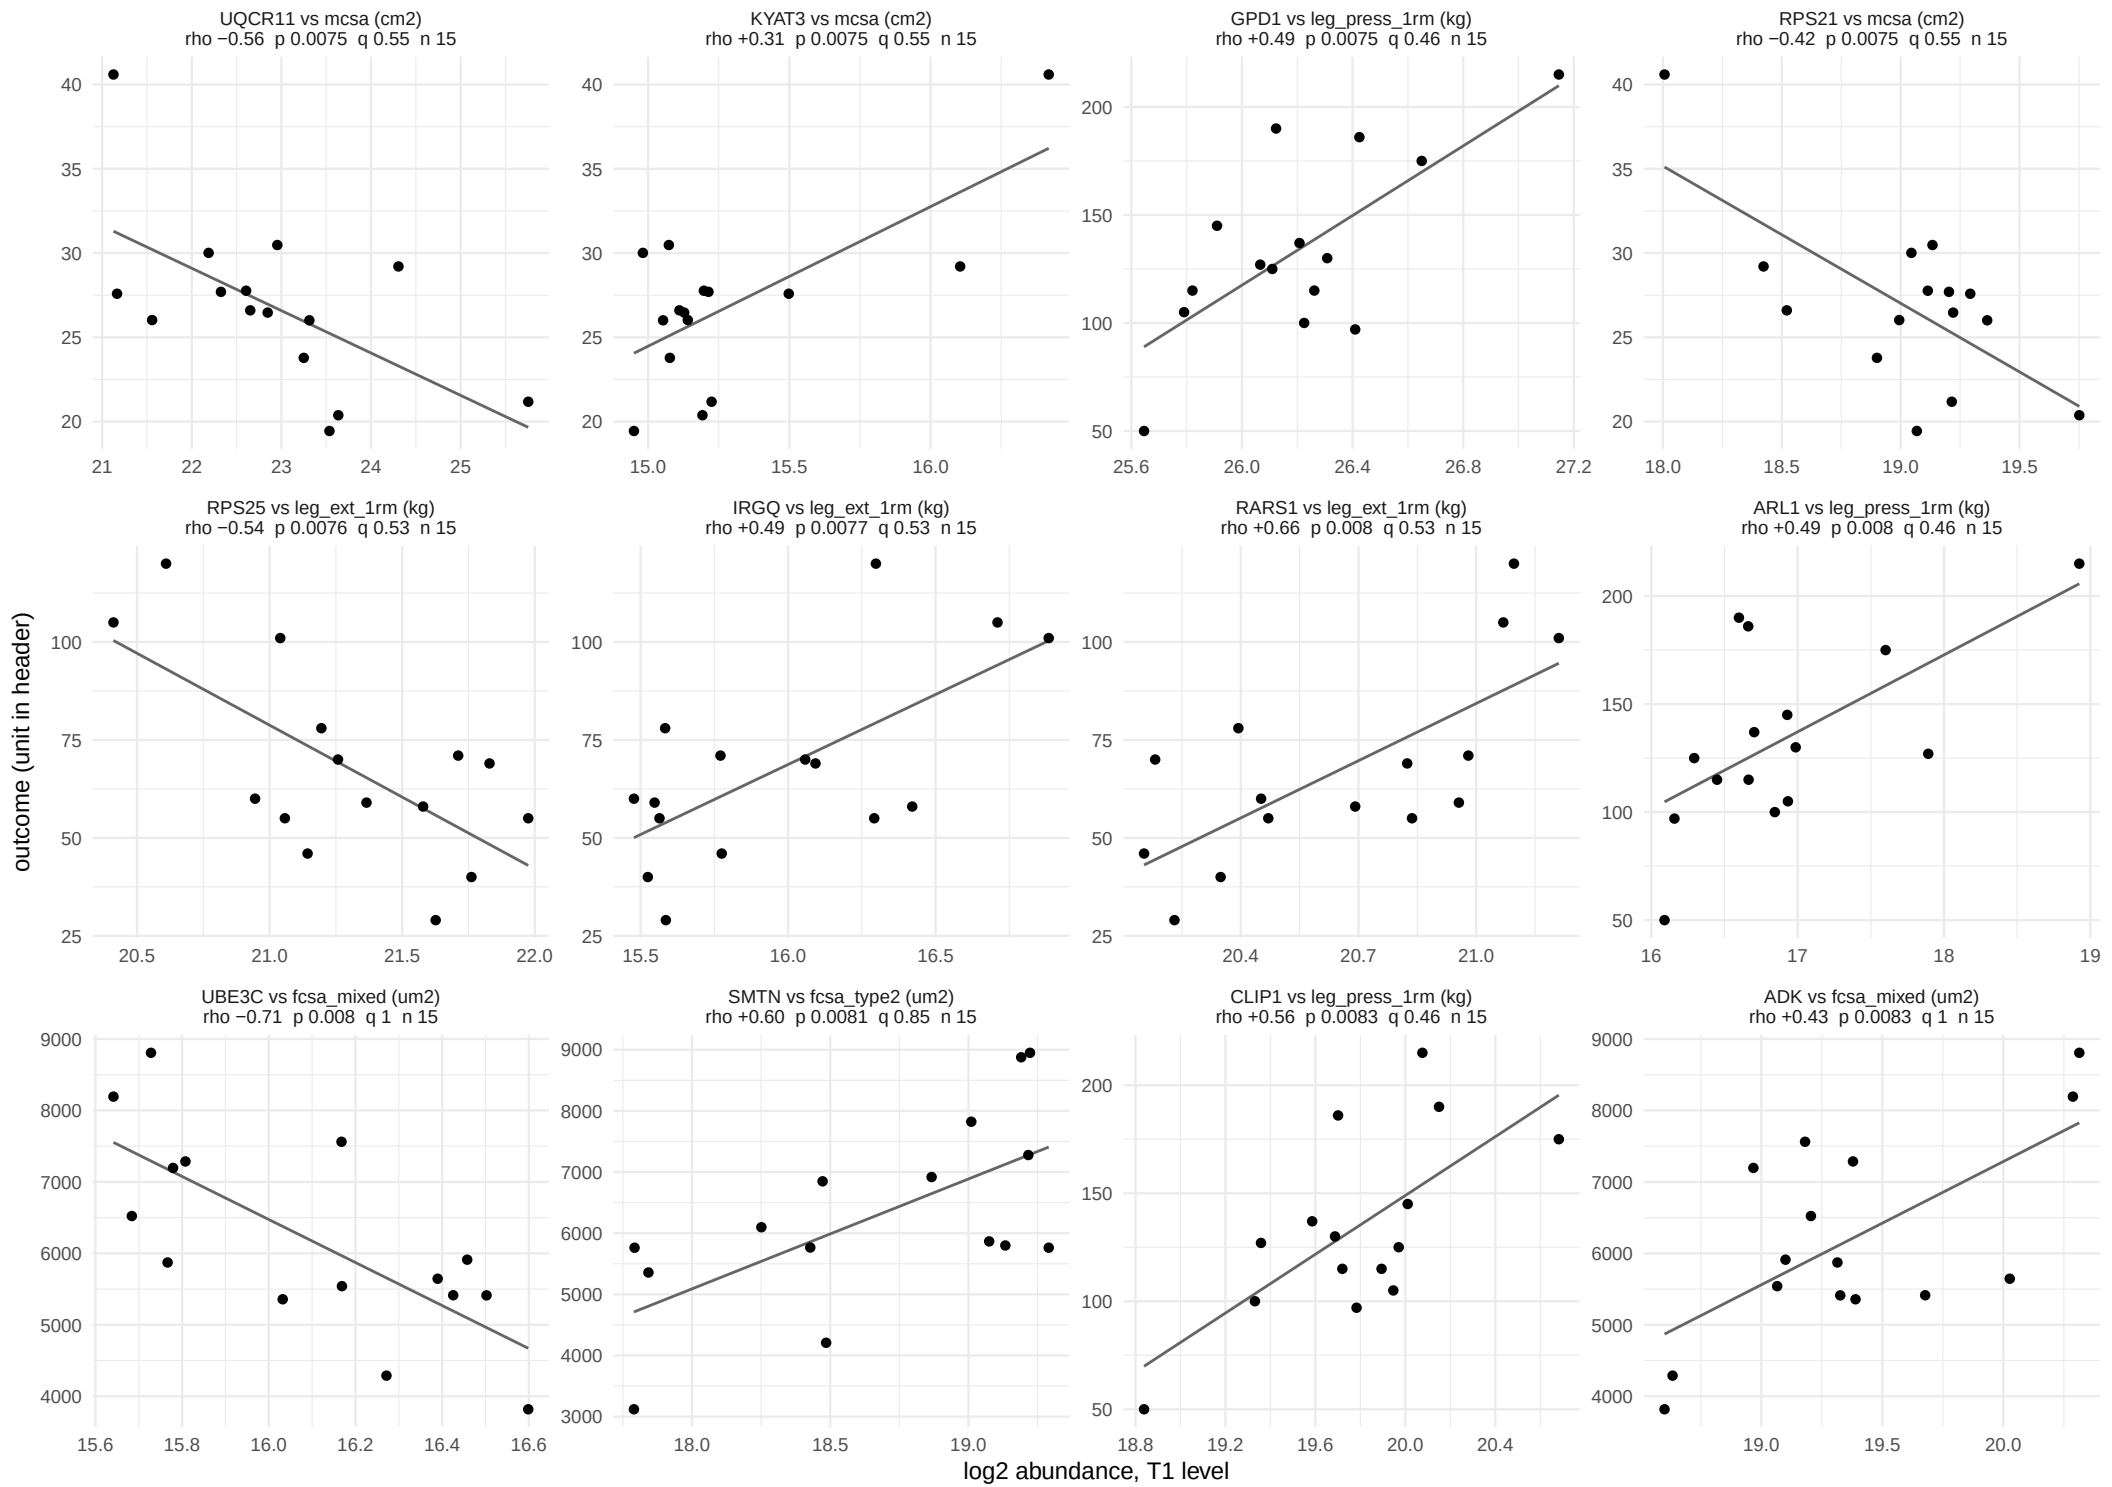

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline_level window


704 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 10 of 59.

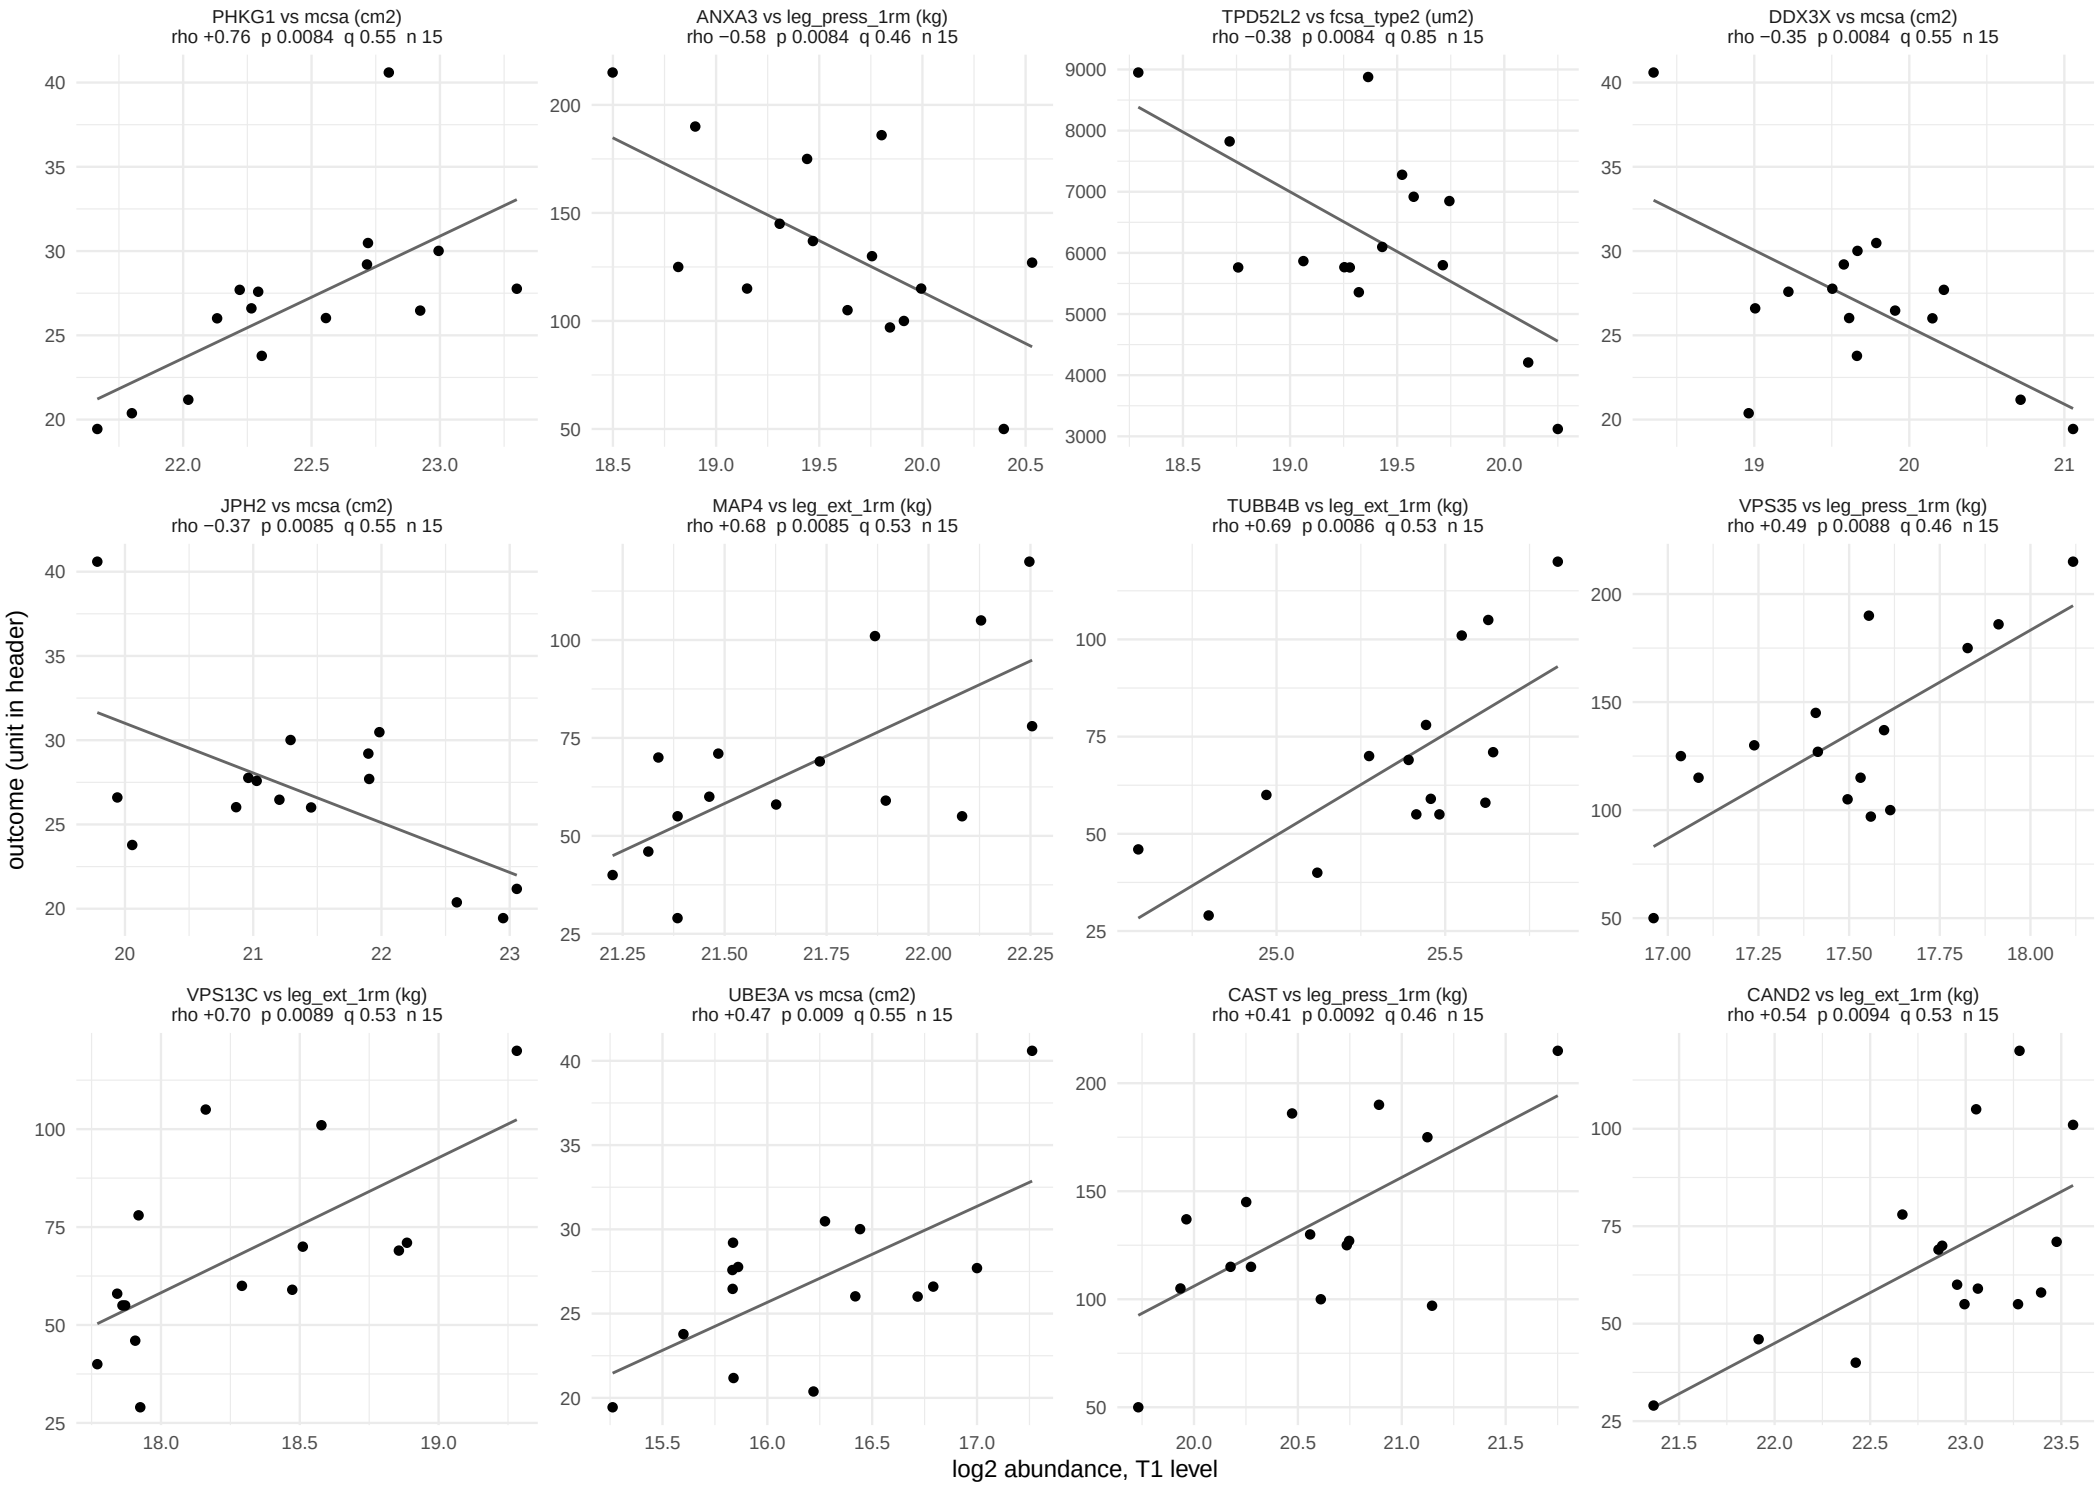

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline_level window


704 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 11 of 59.

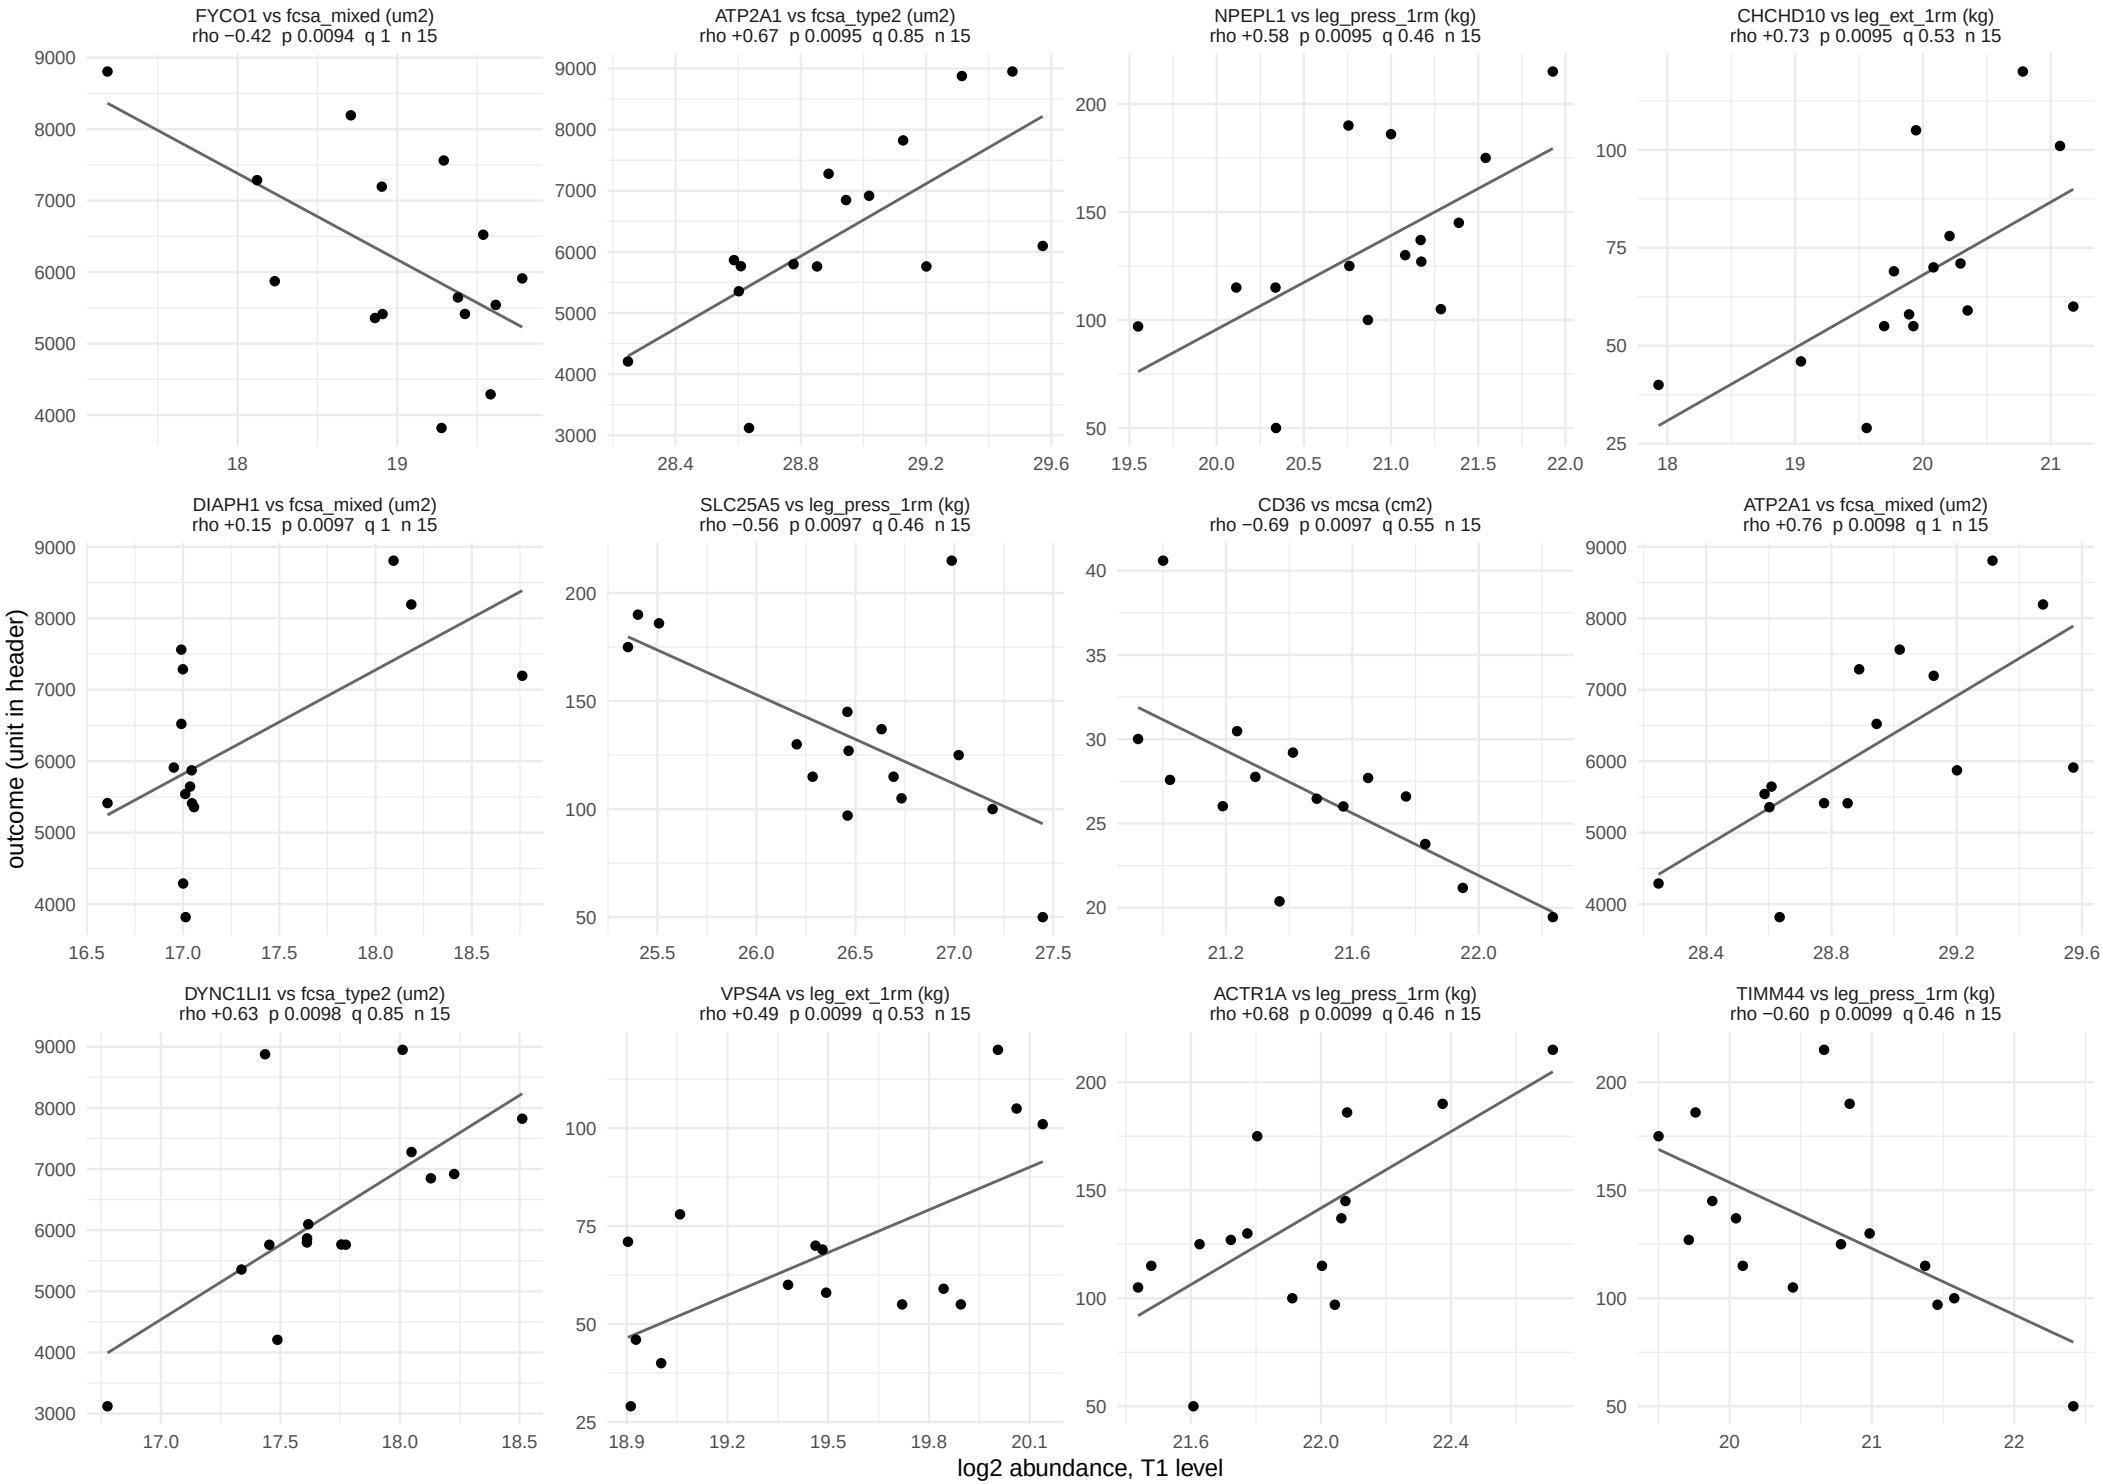

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline_level window


704 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 12 of 59.

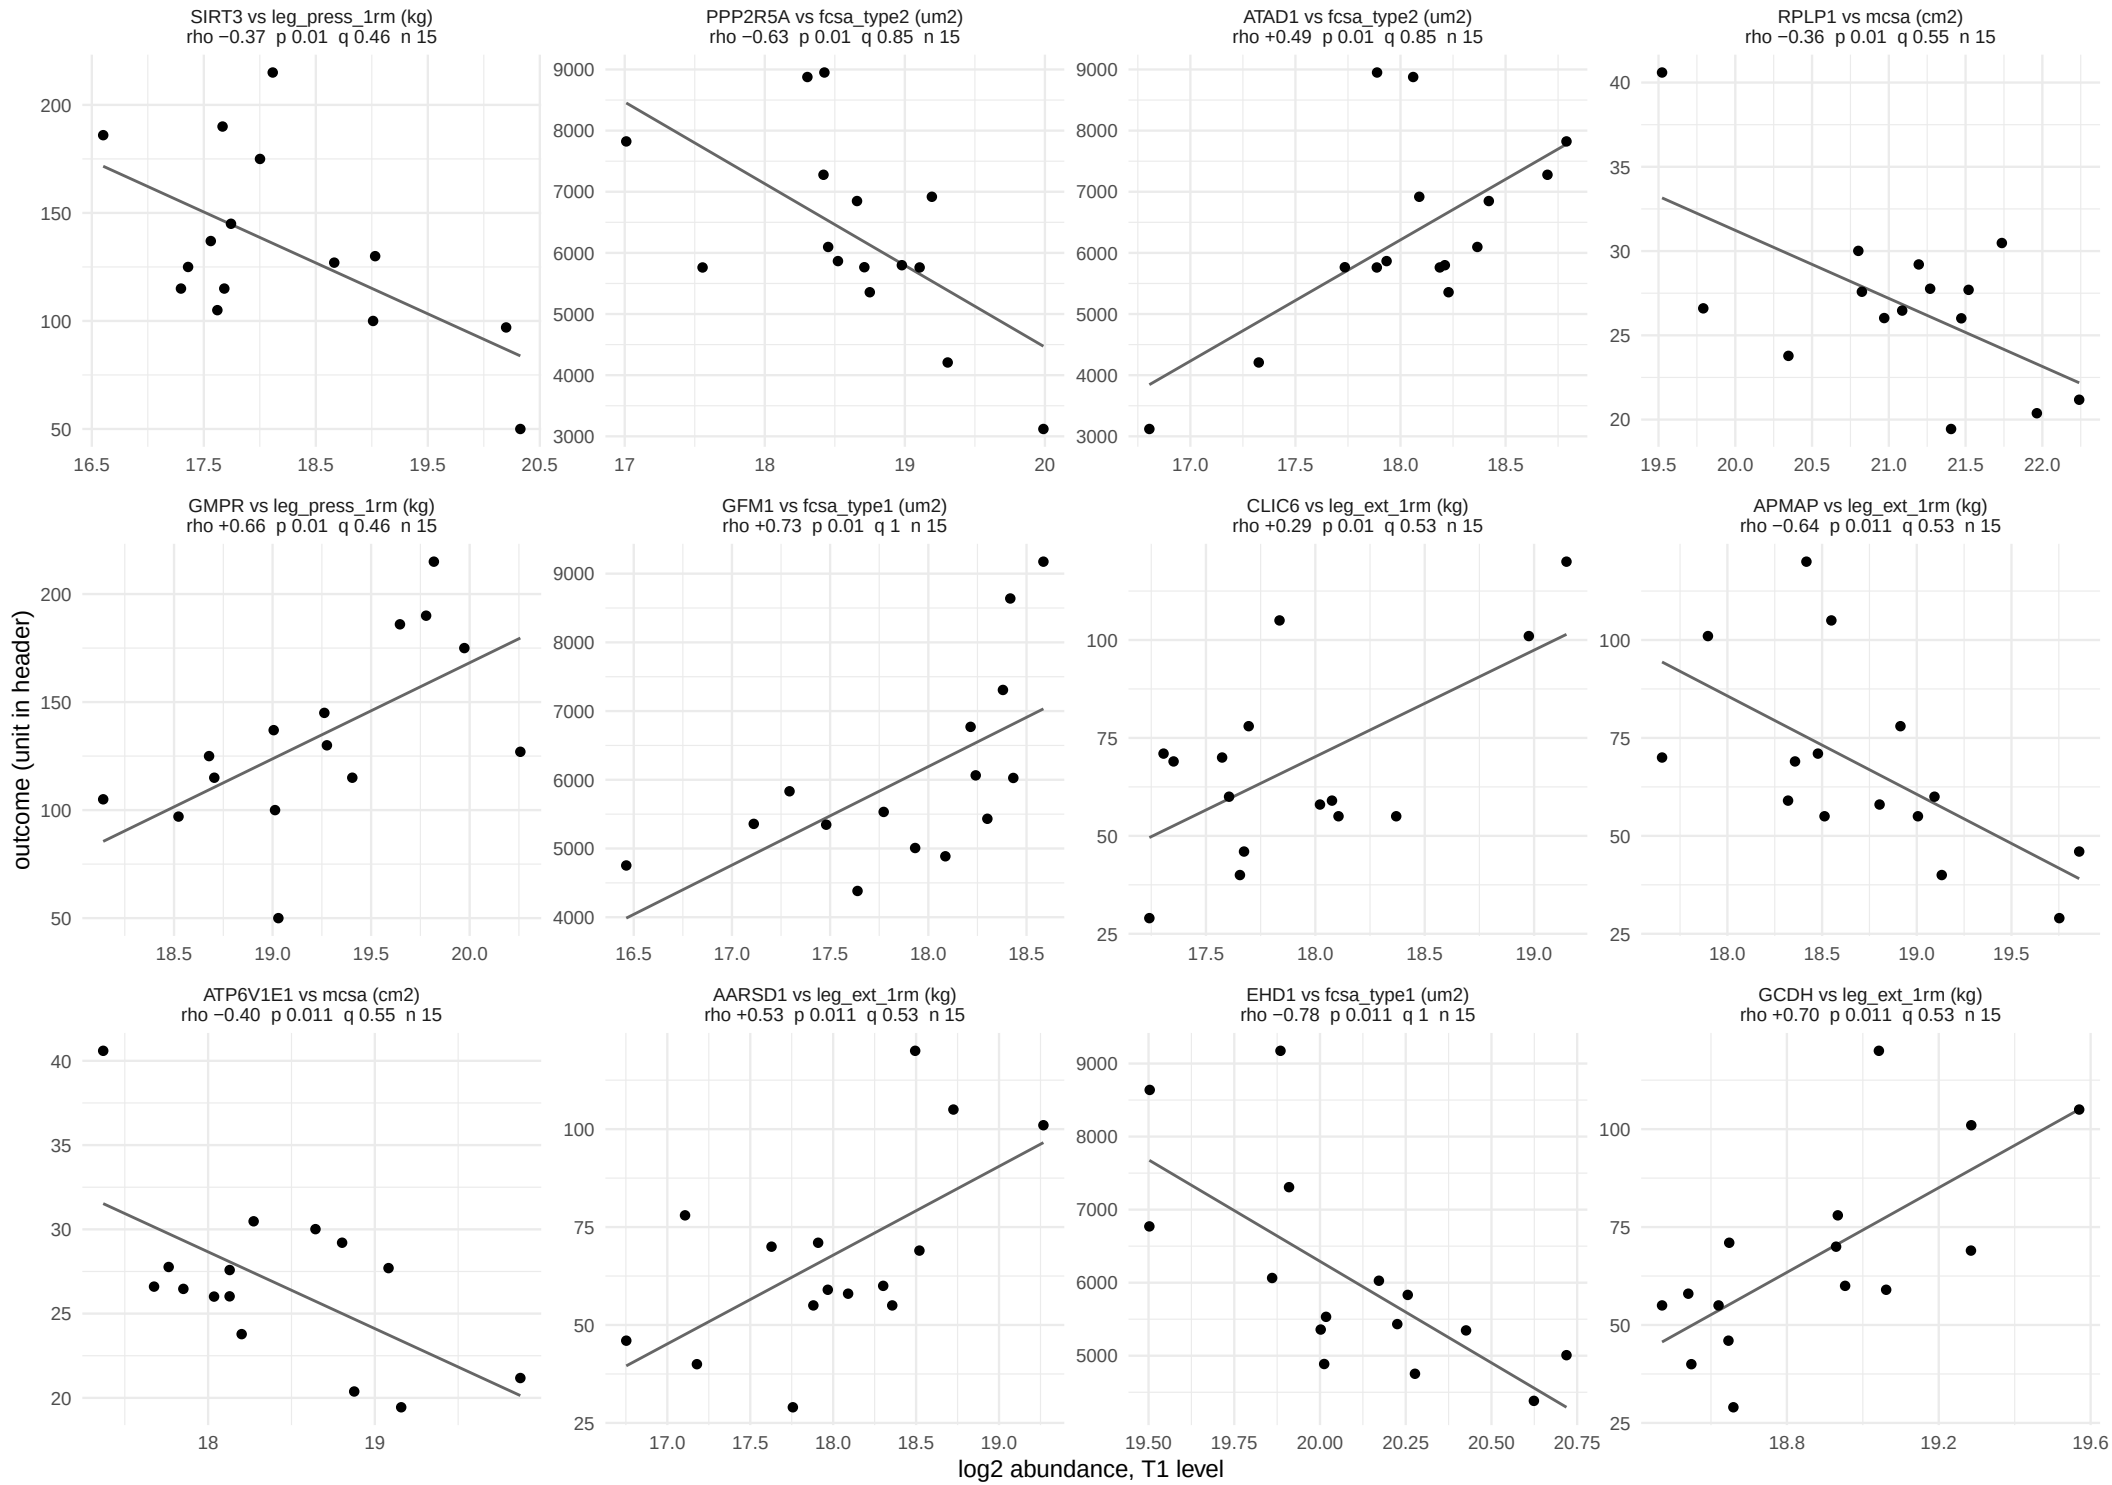

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline_level window


704 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 13 of 59.

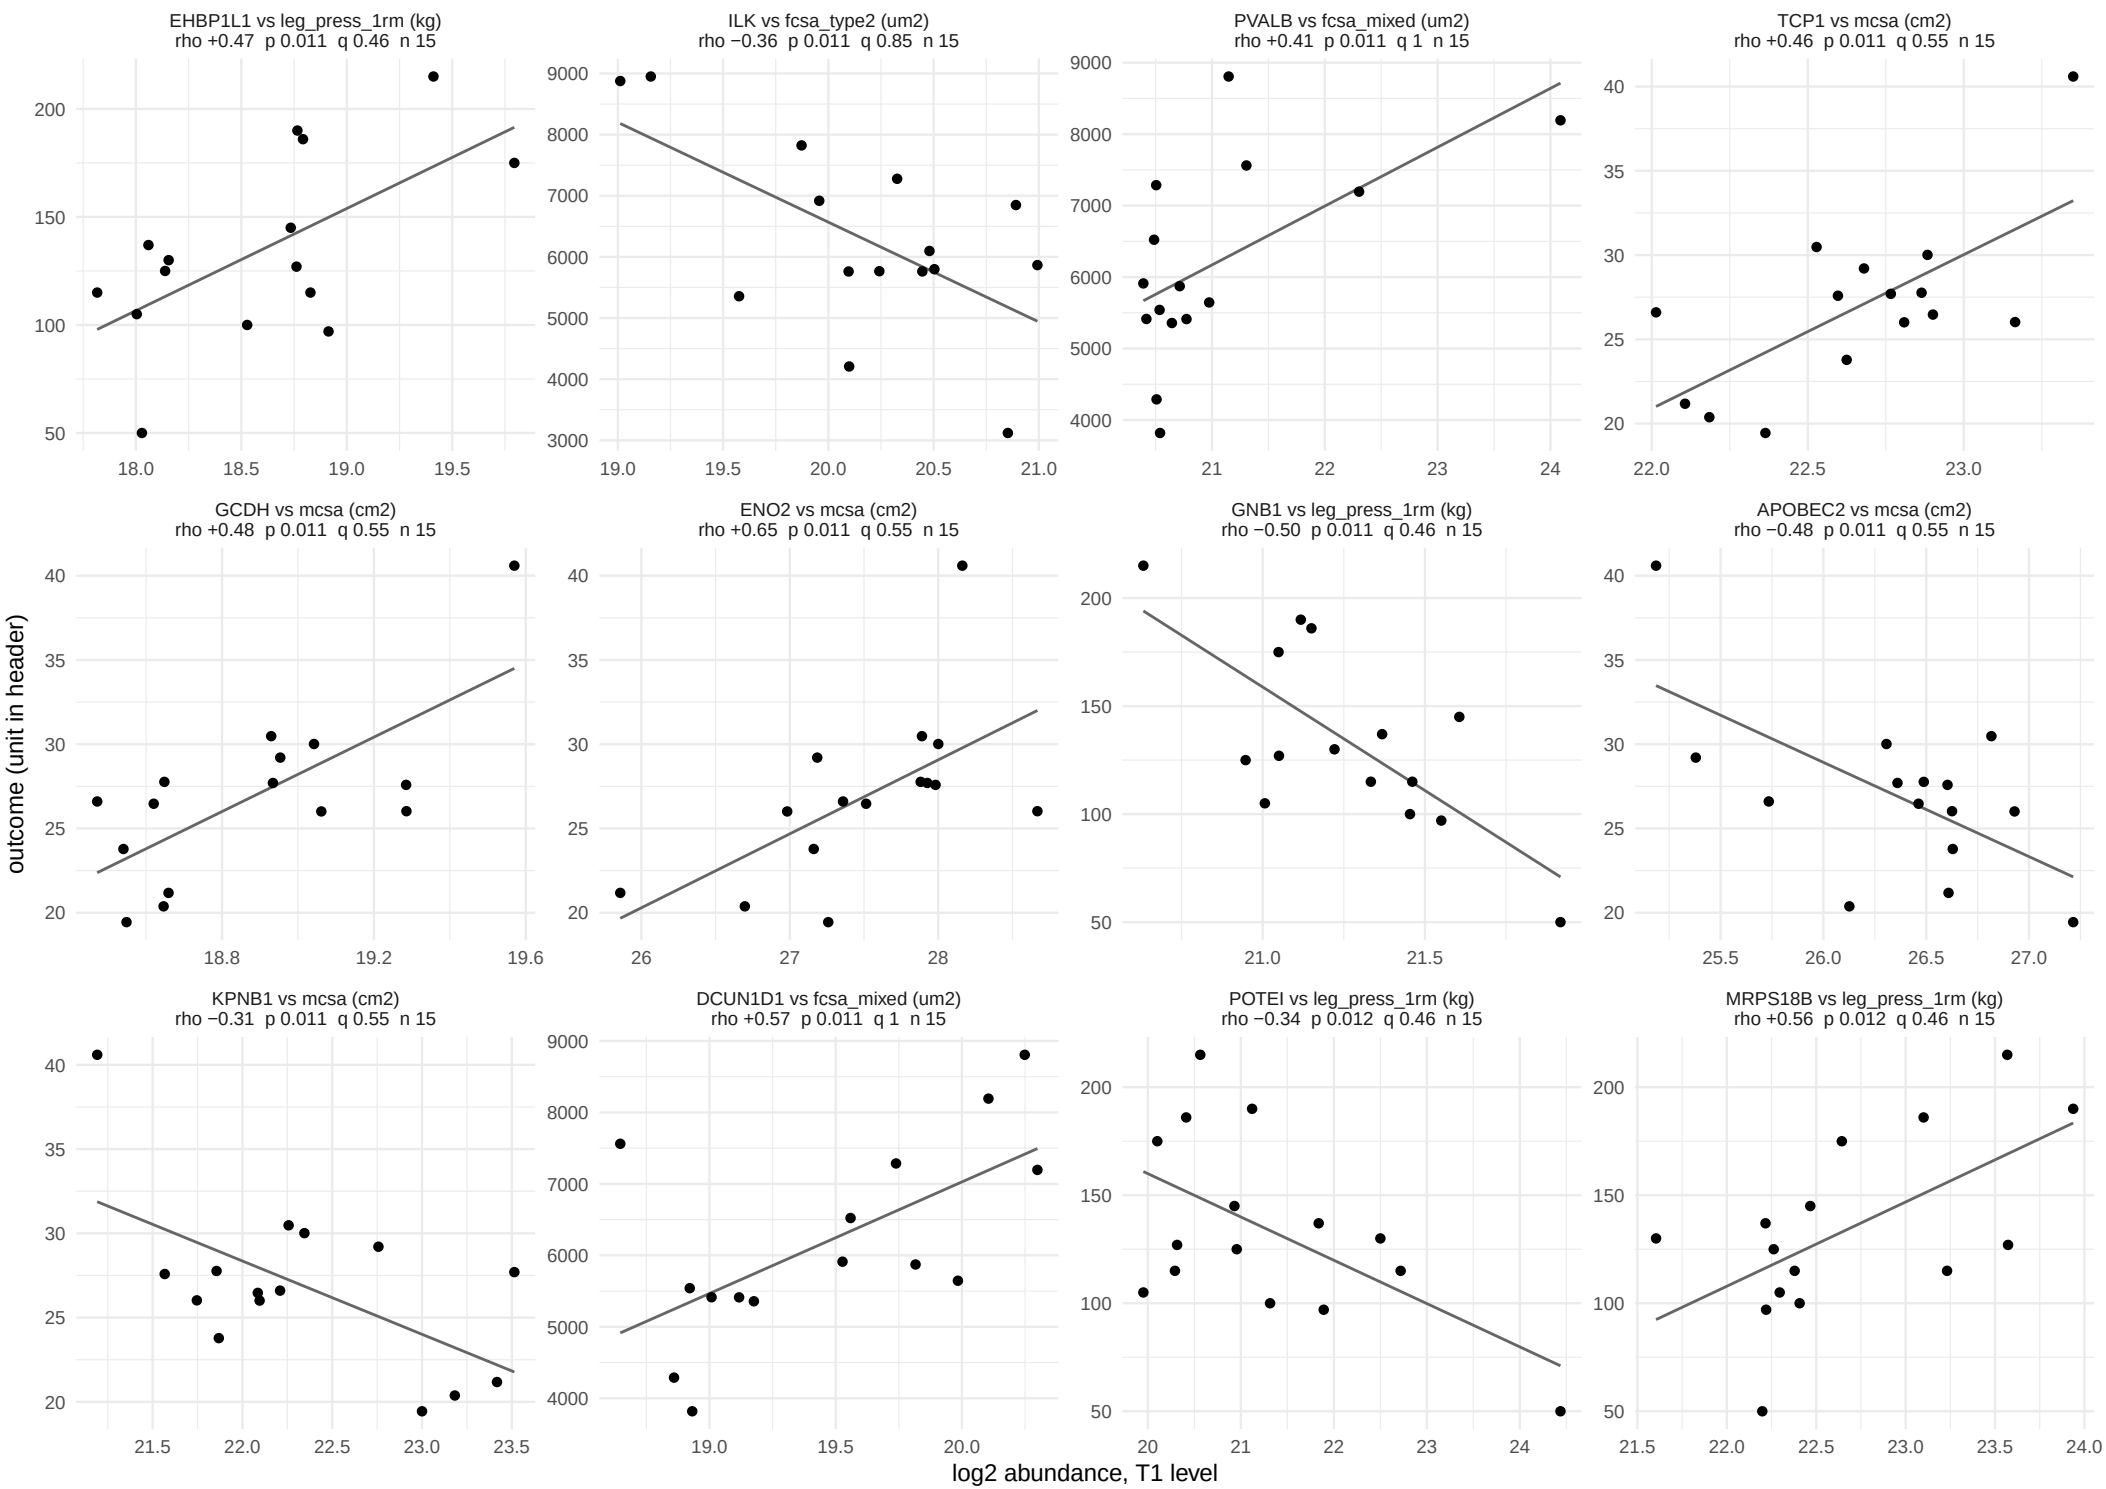

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline_level window


704 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 14 of 59.

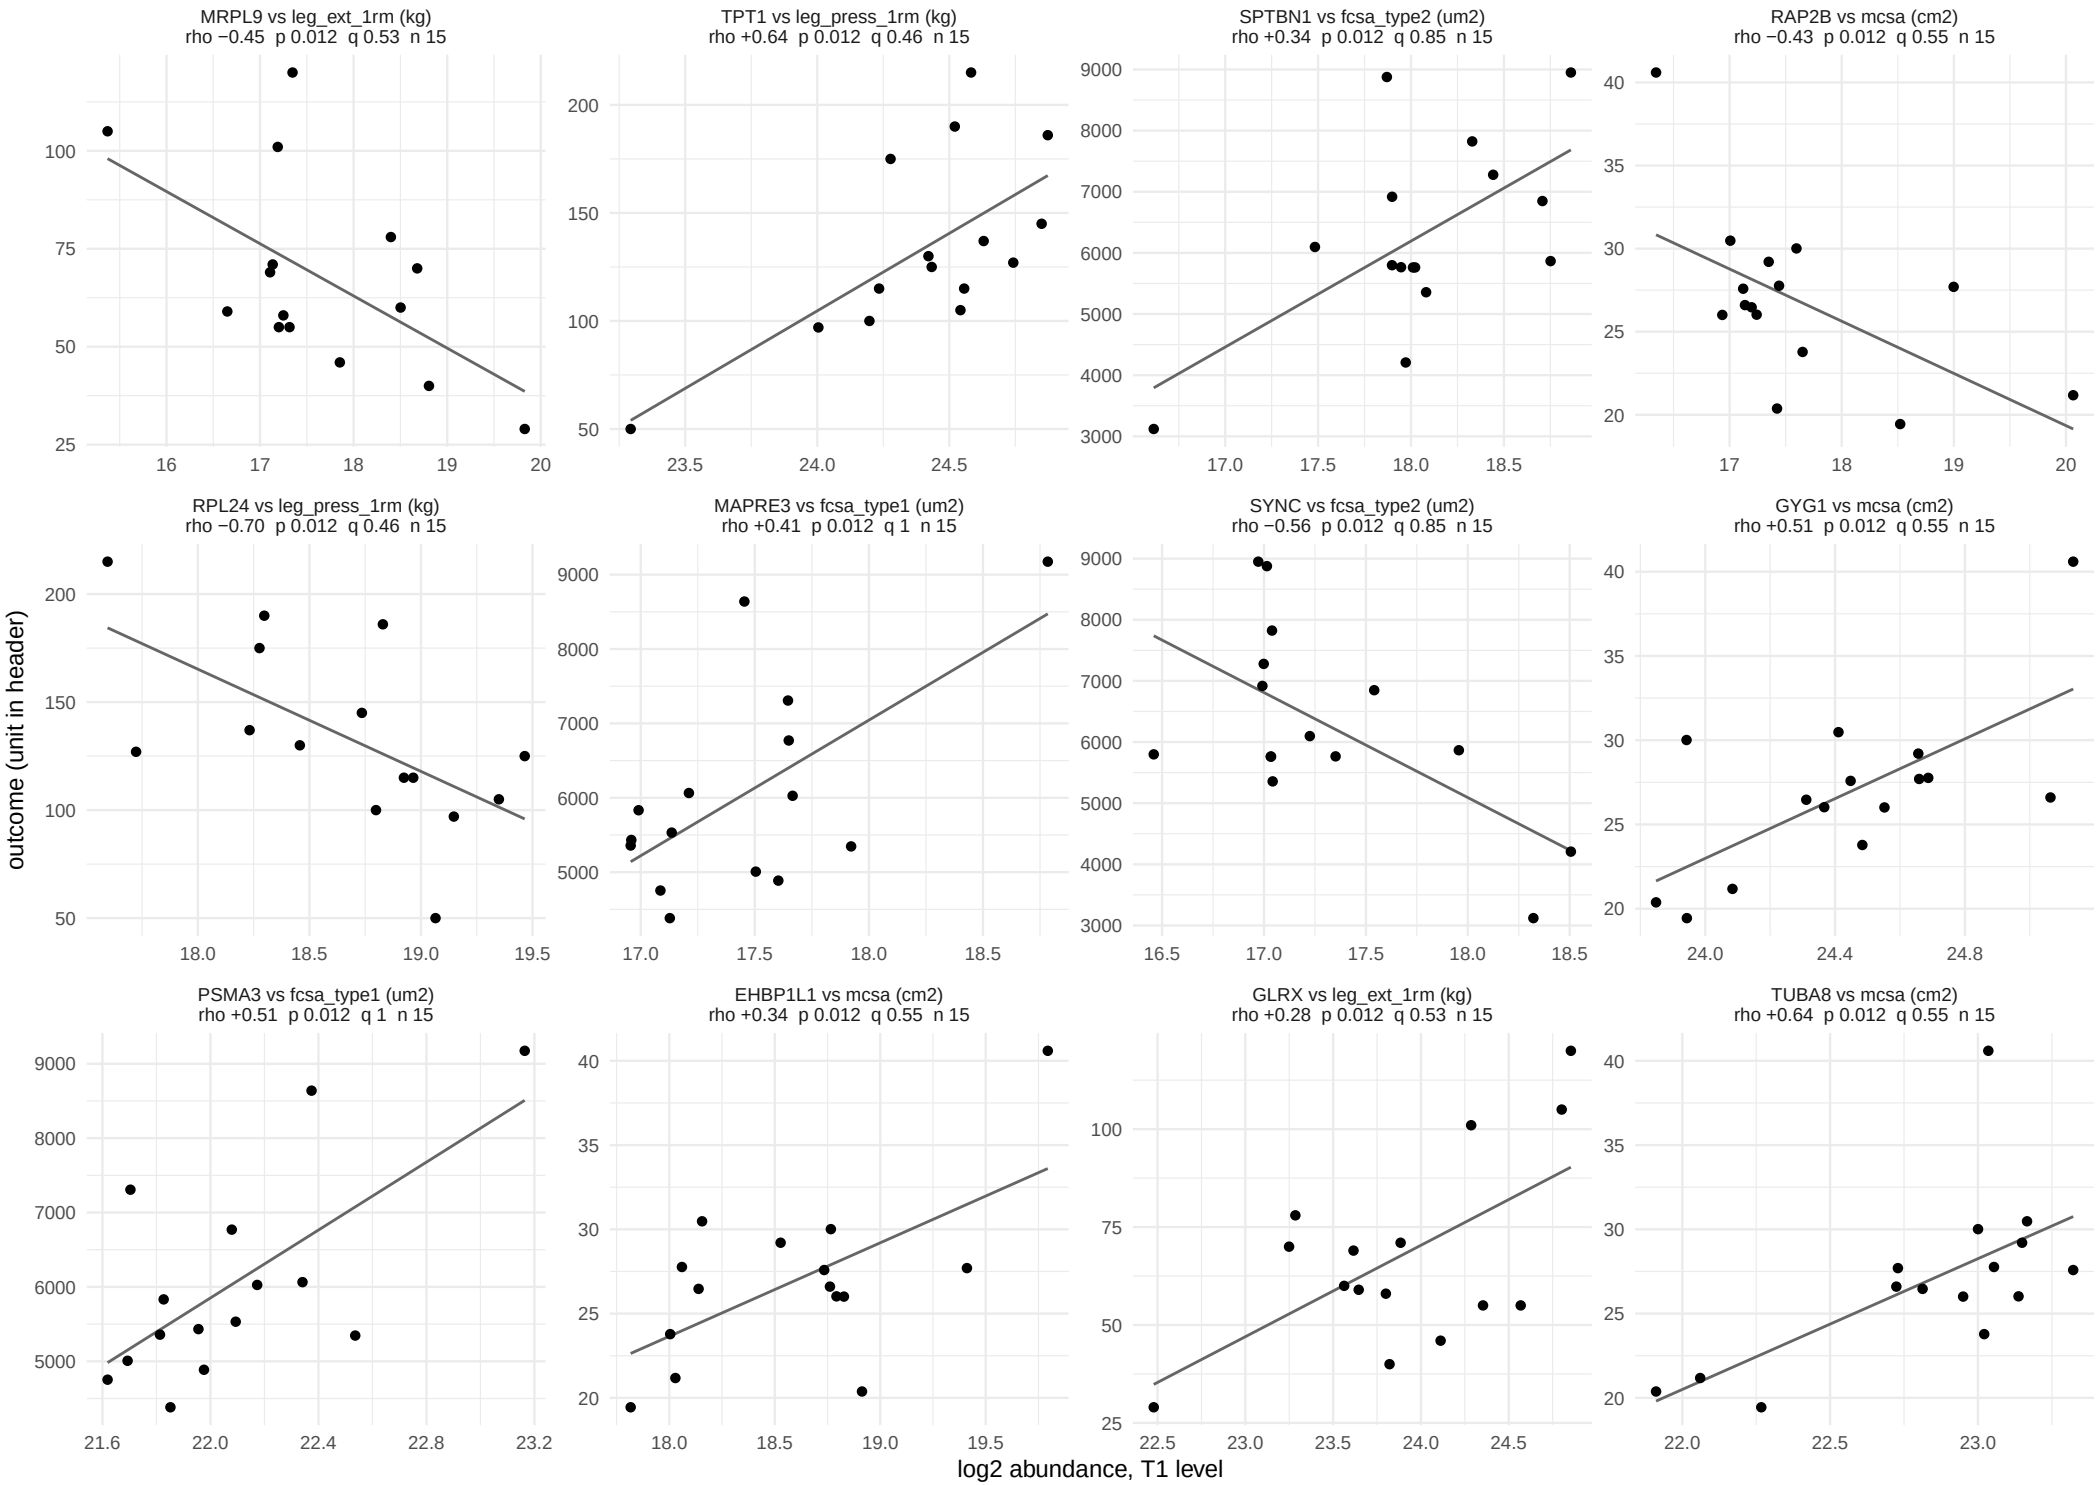

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline_level window


704 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 15 of 59.

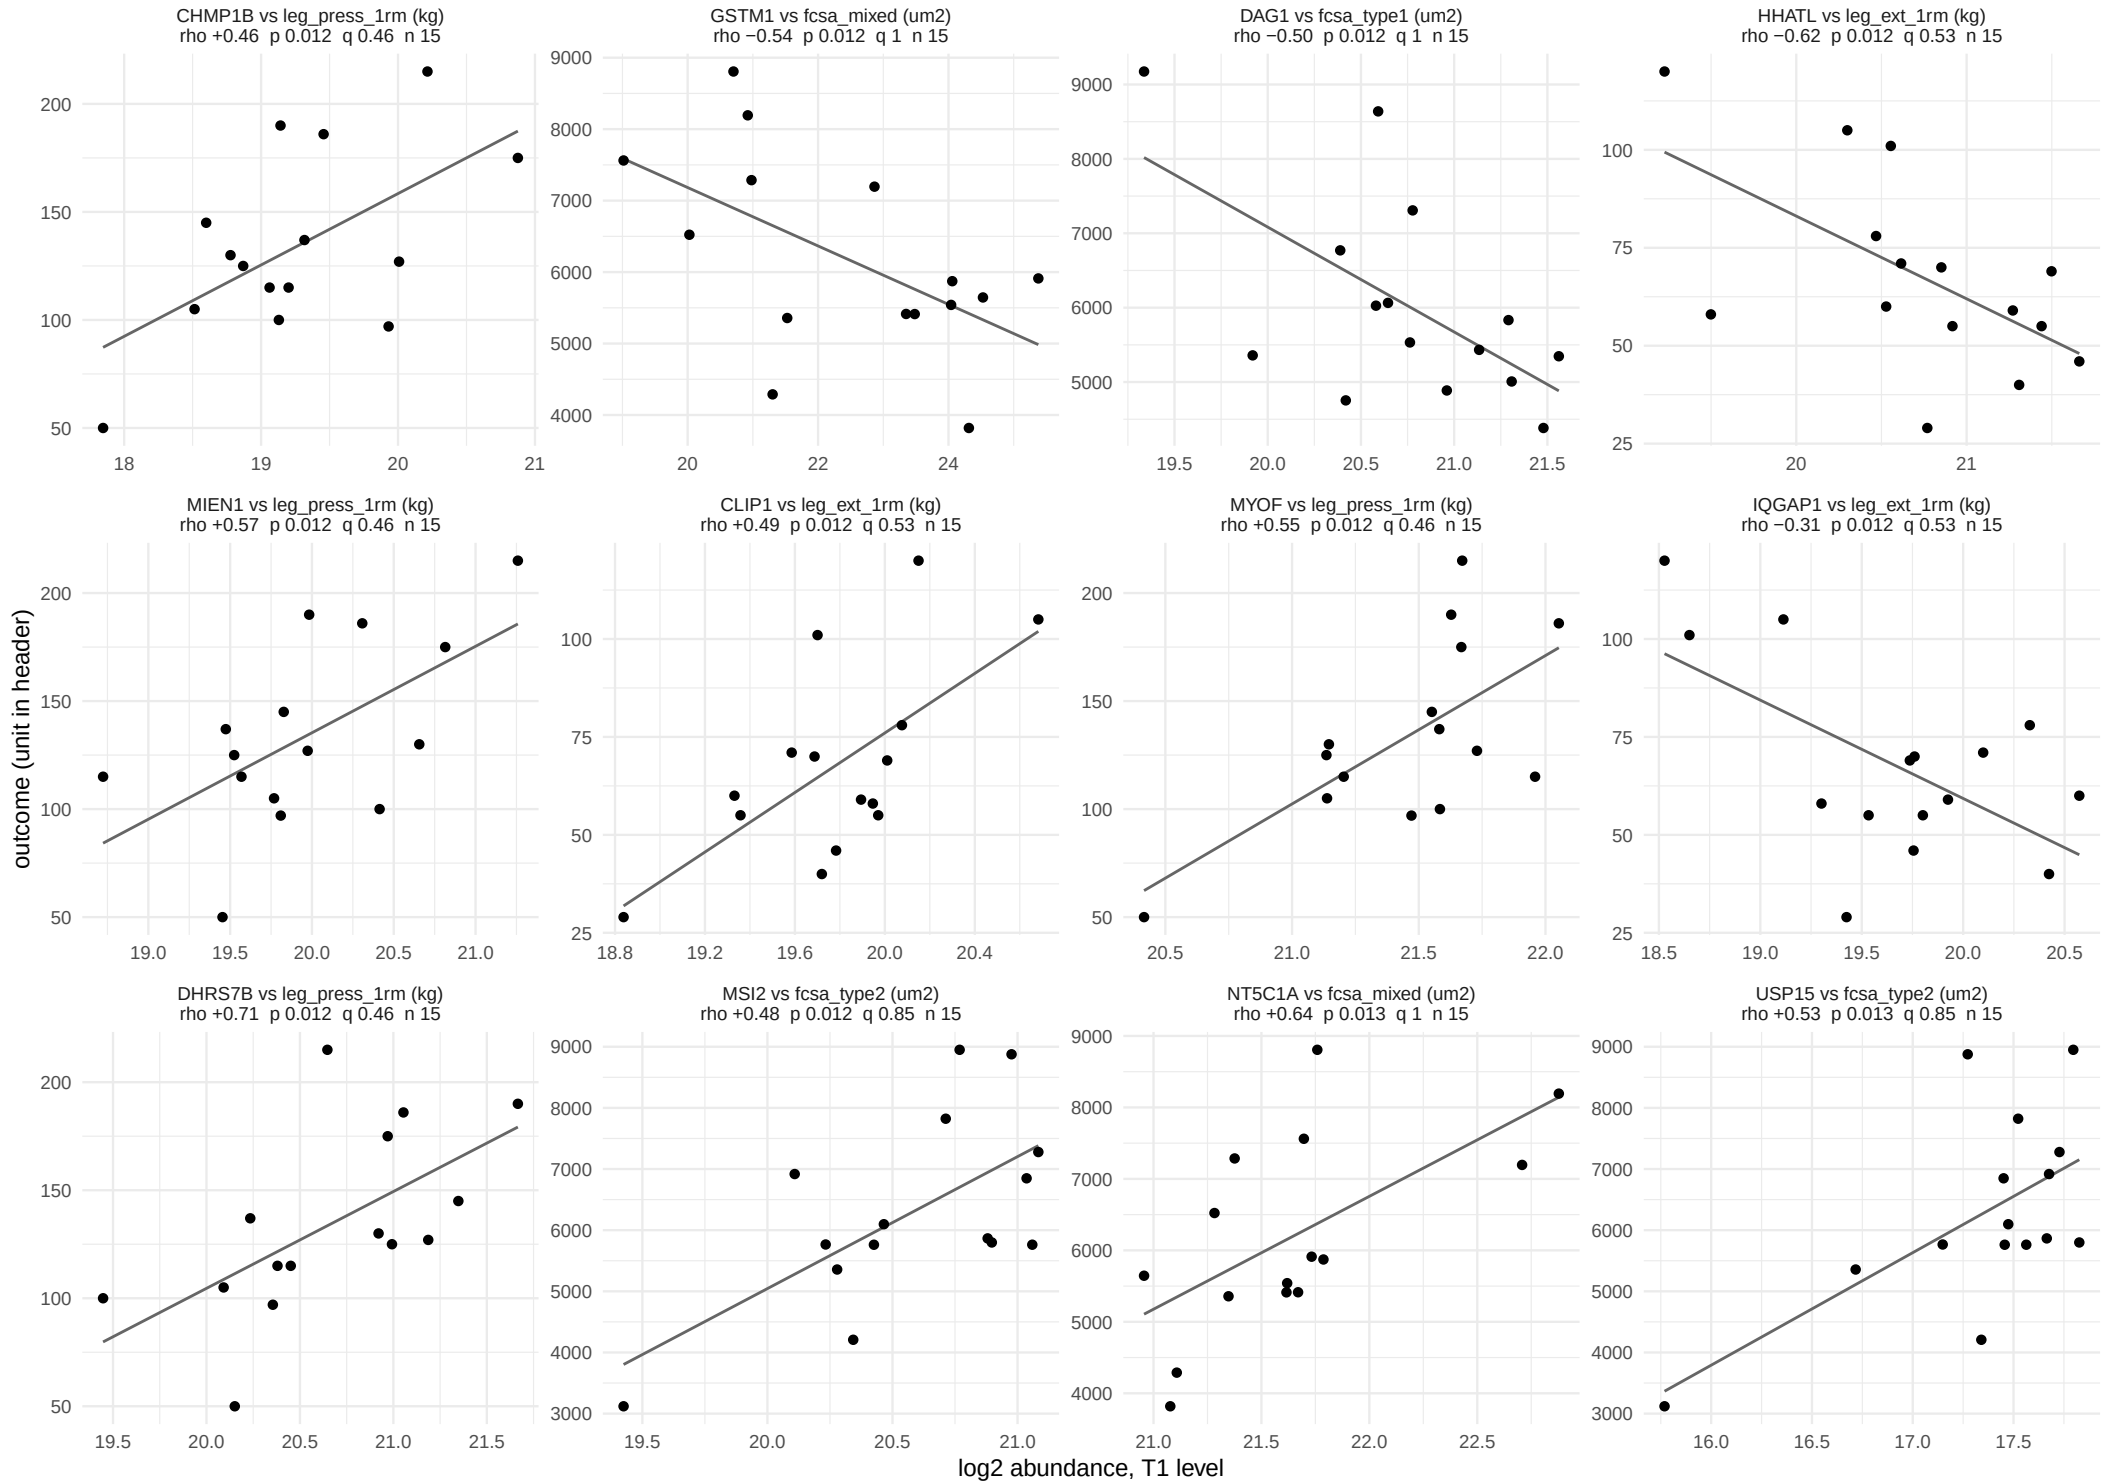

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline_level window


704 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 16 of 59.

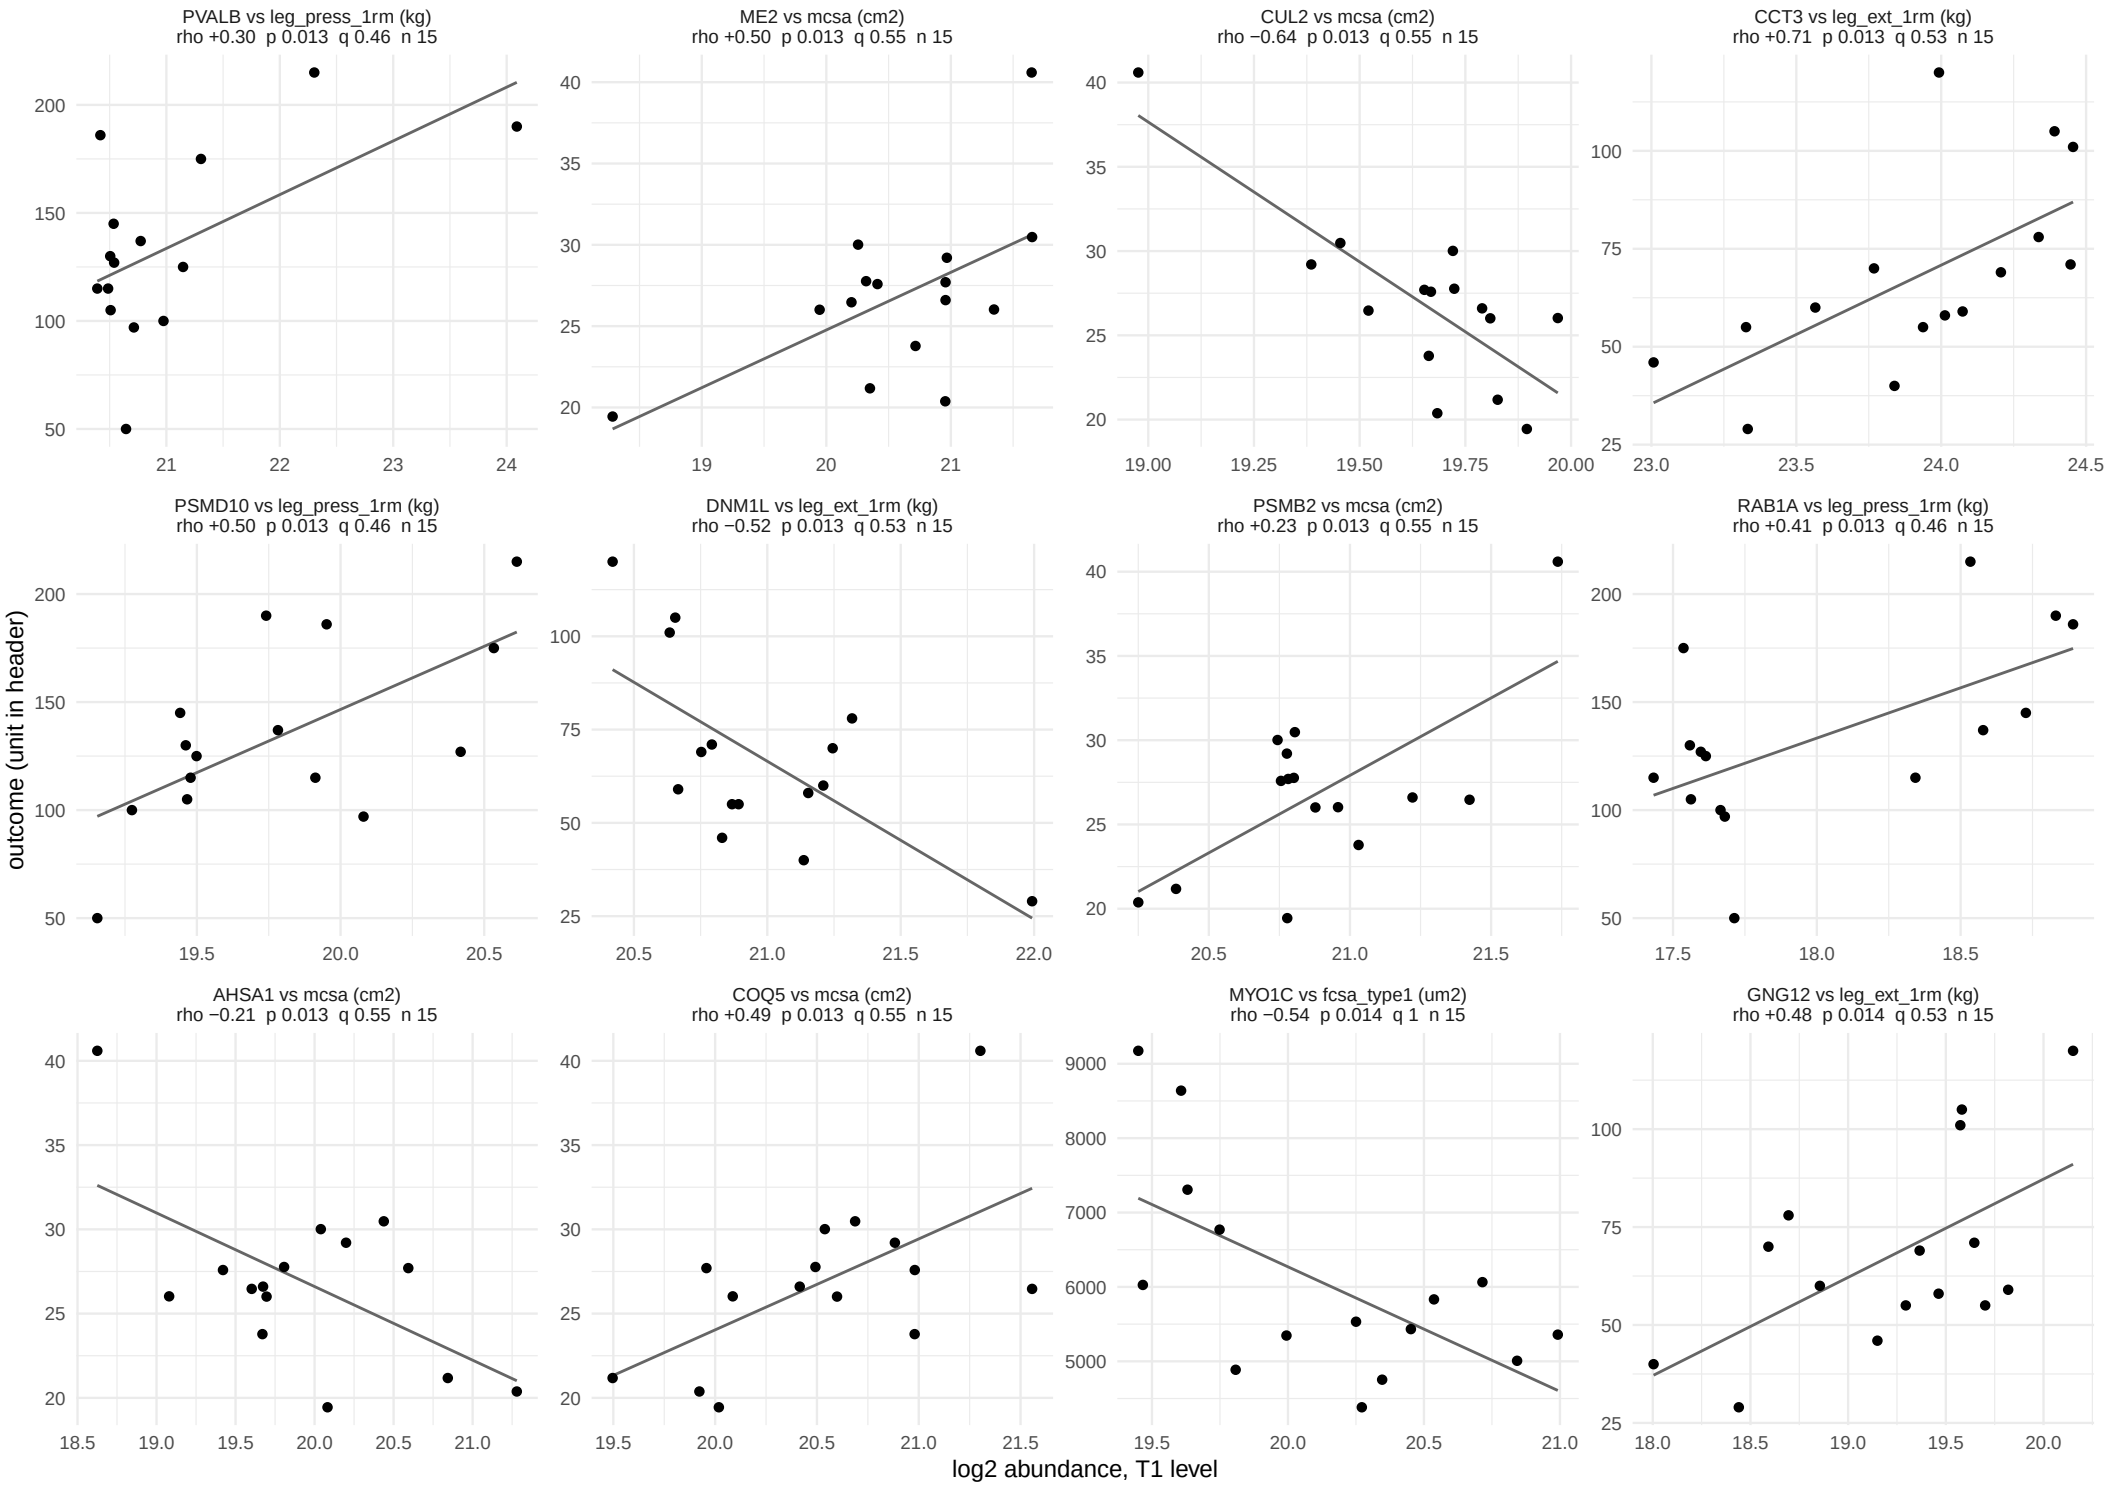

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline_level window


704 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 17 of 59.

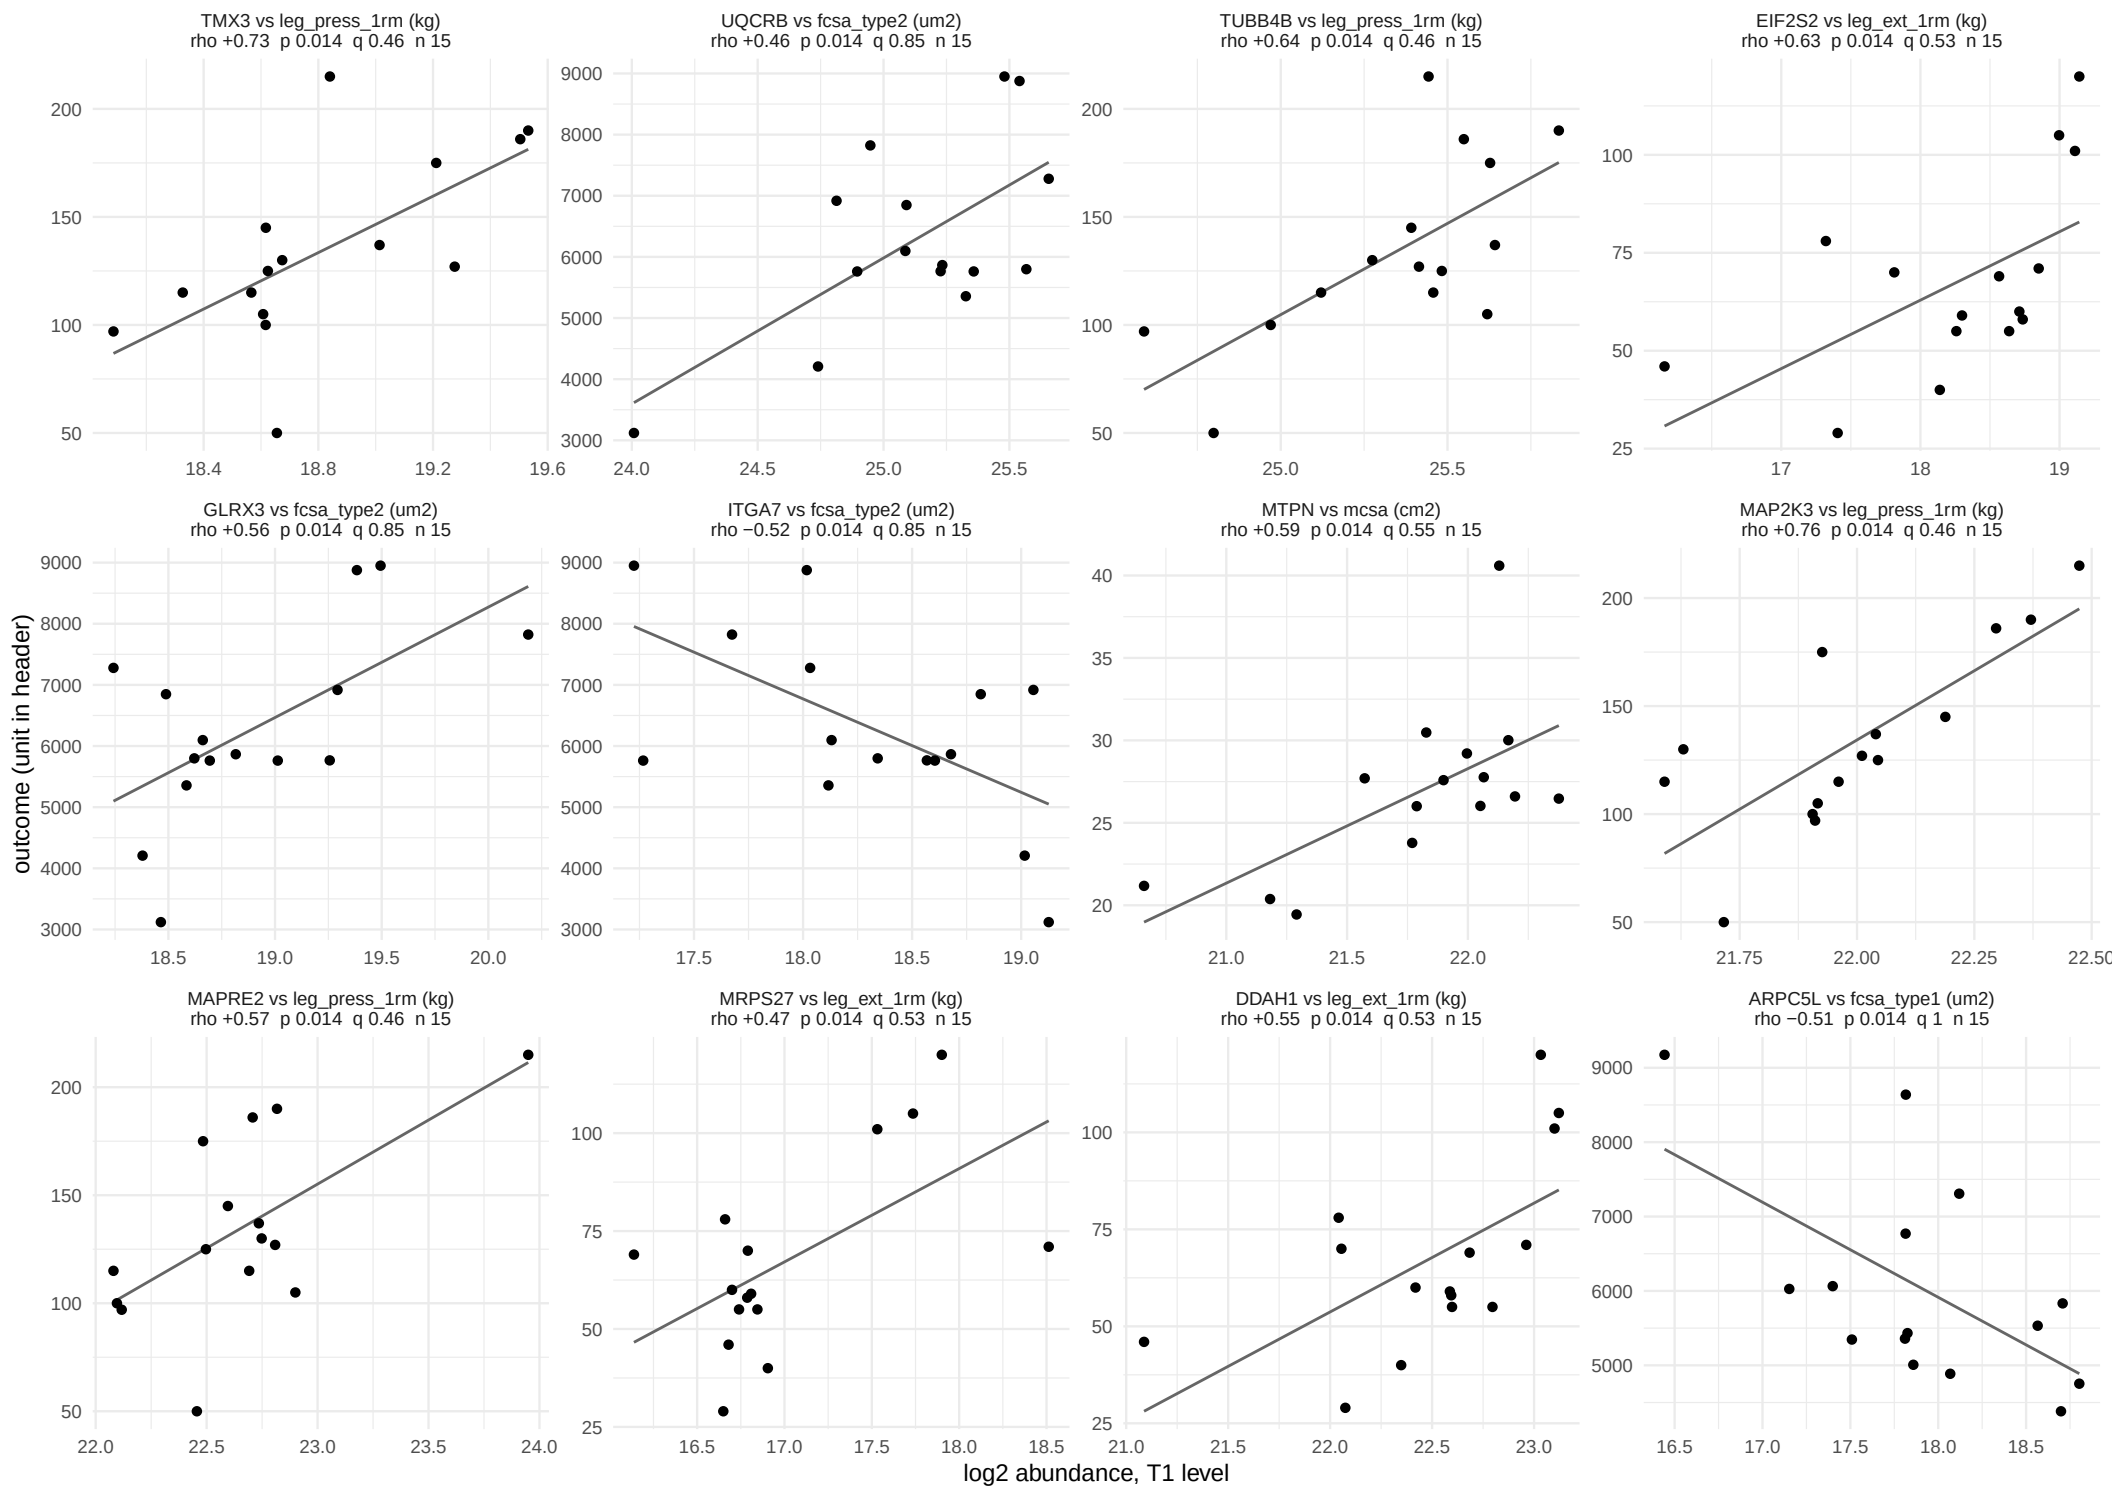

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline_level window


704 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 18 of 59.

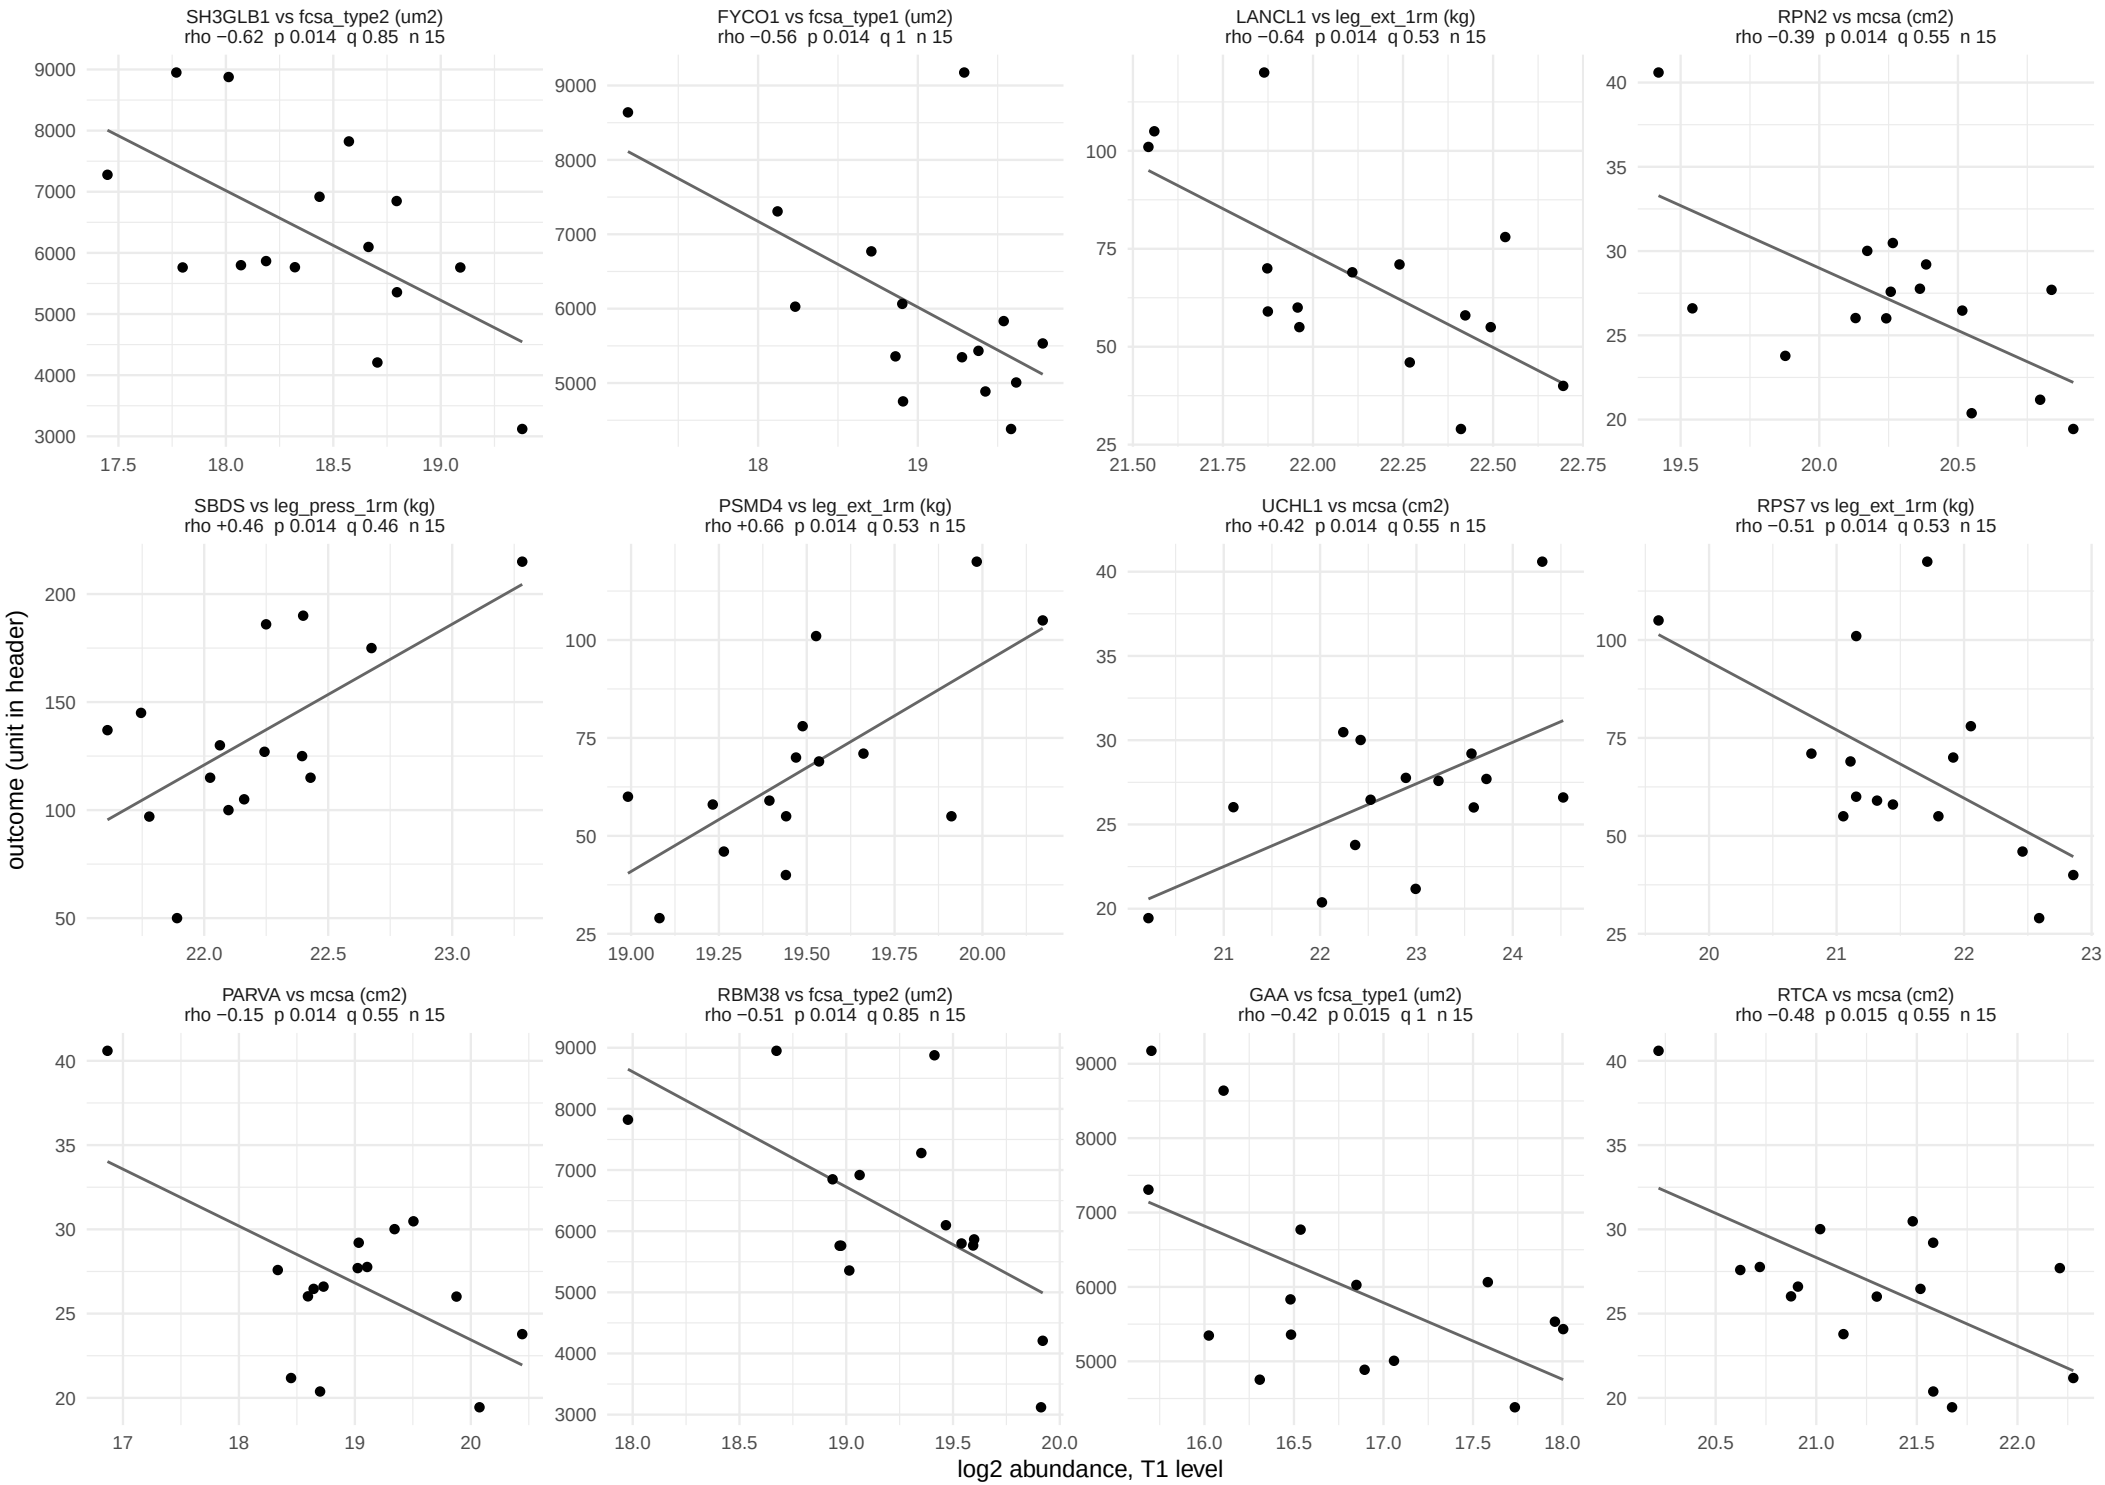

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline_level window


704 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 19 of 59.

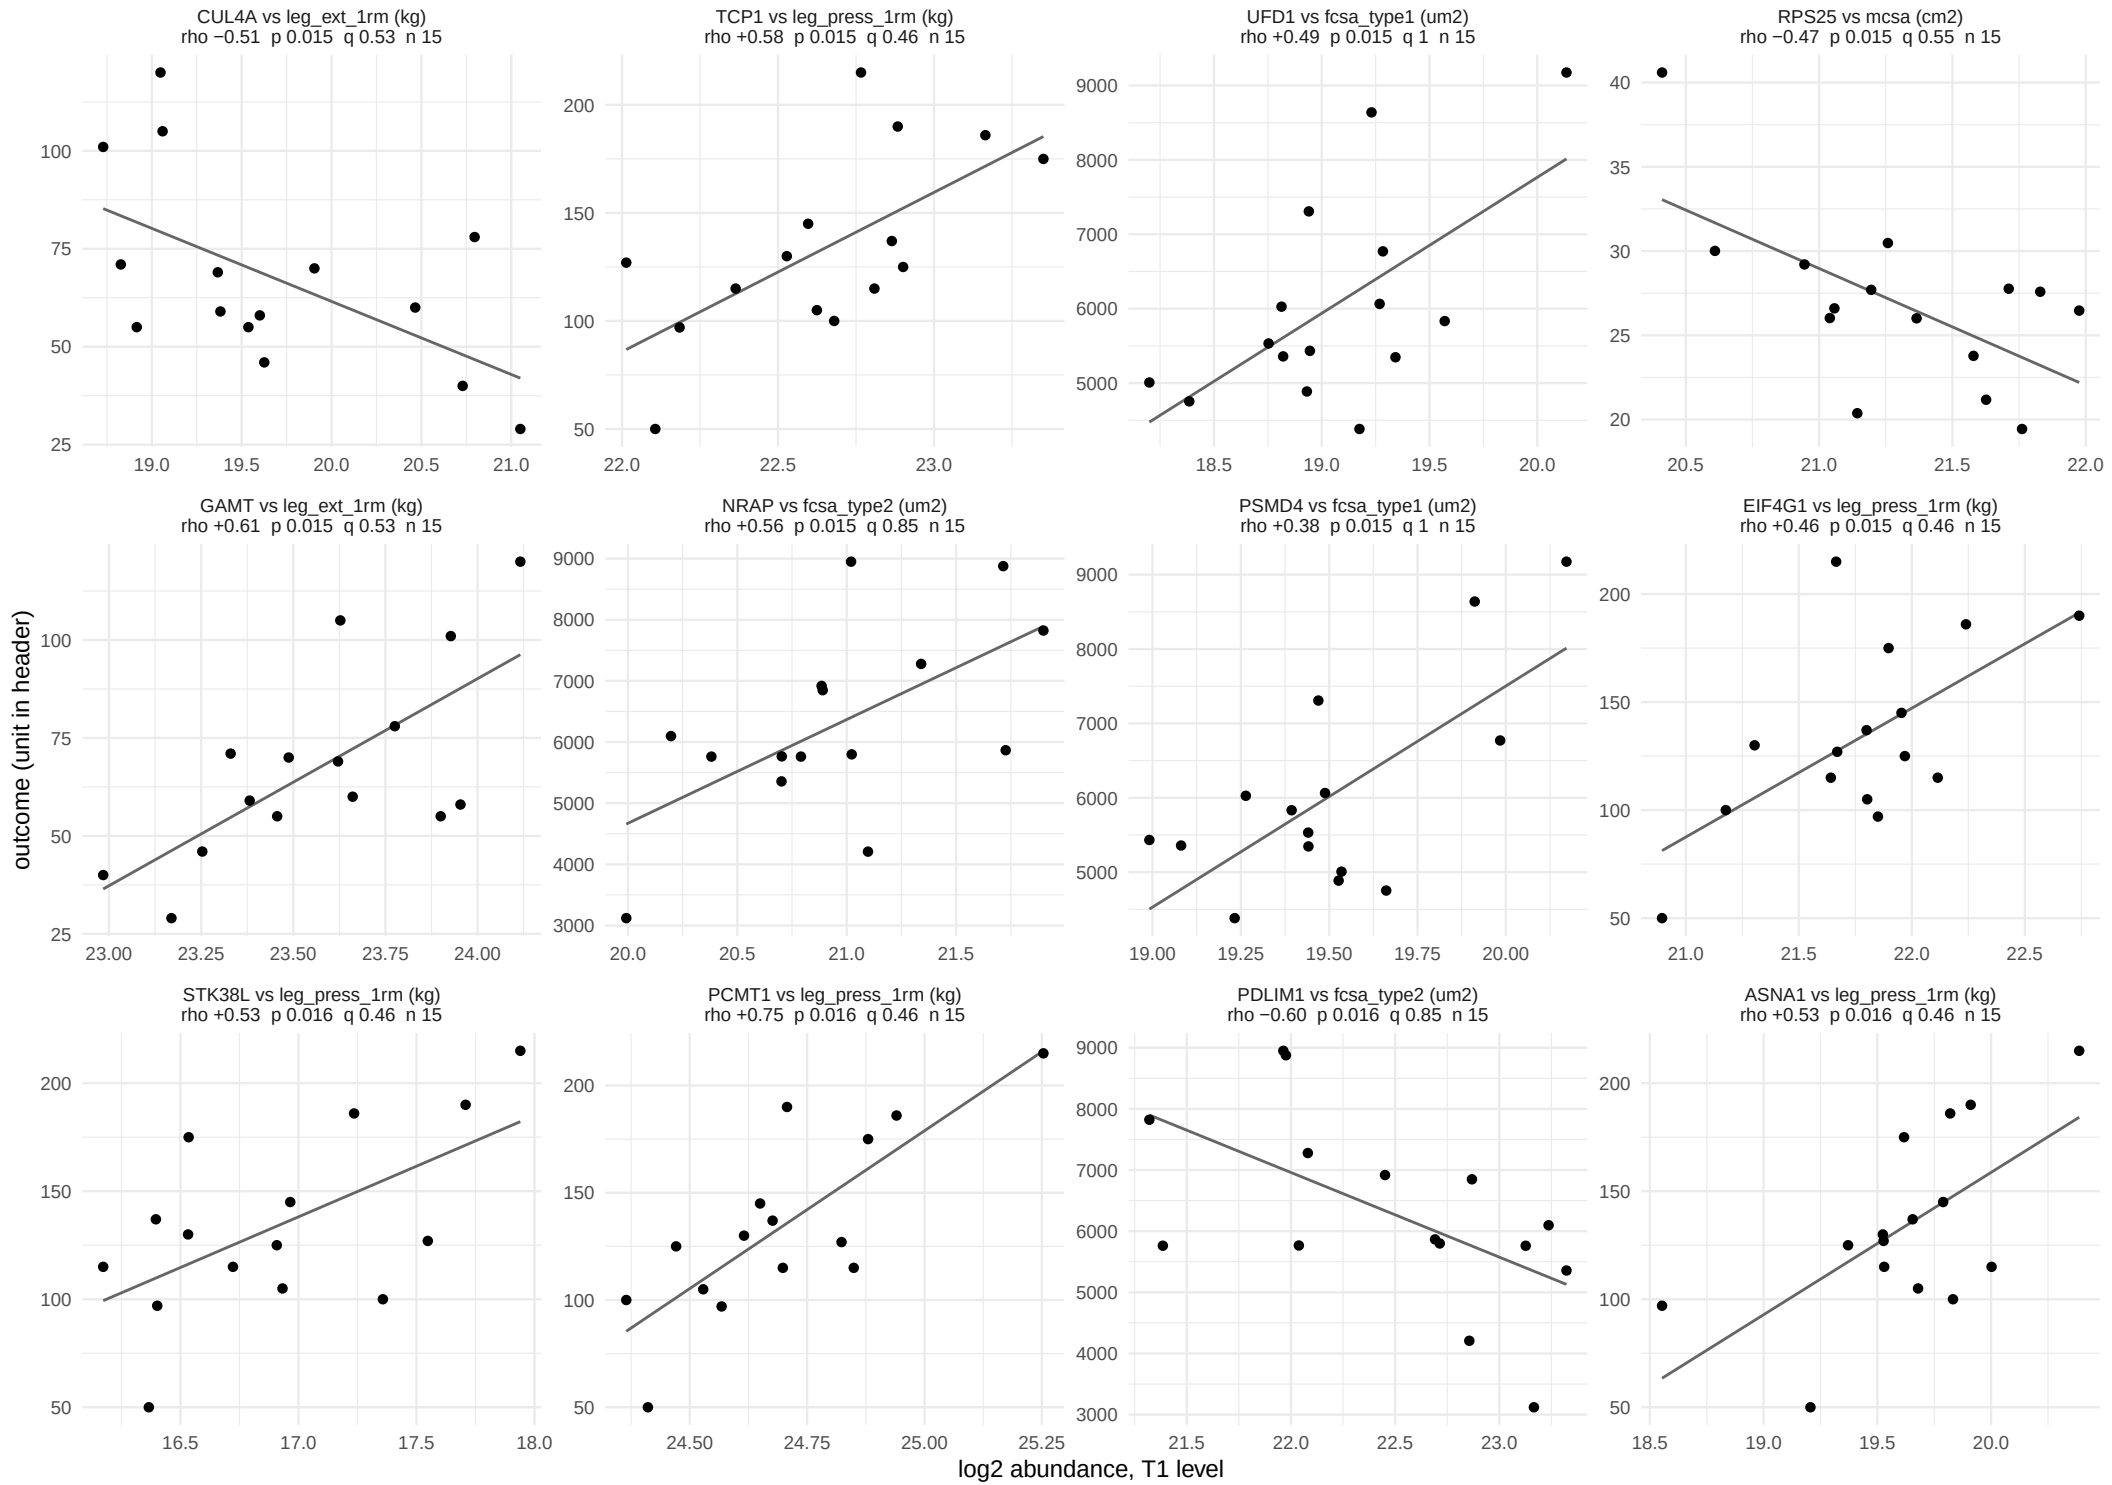

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline_level window


704 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 20 of 59.

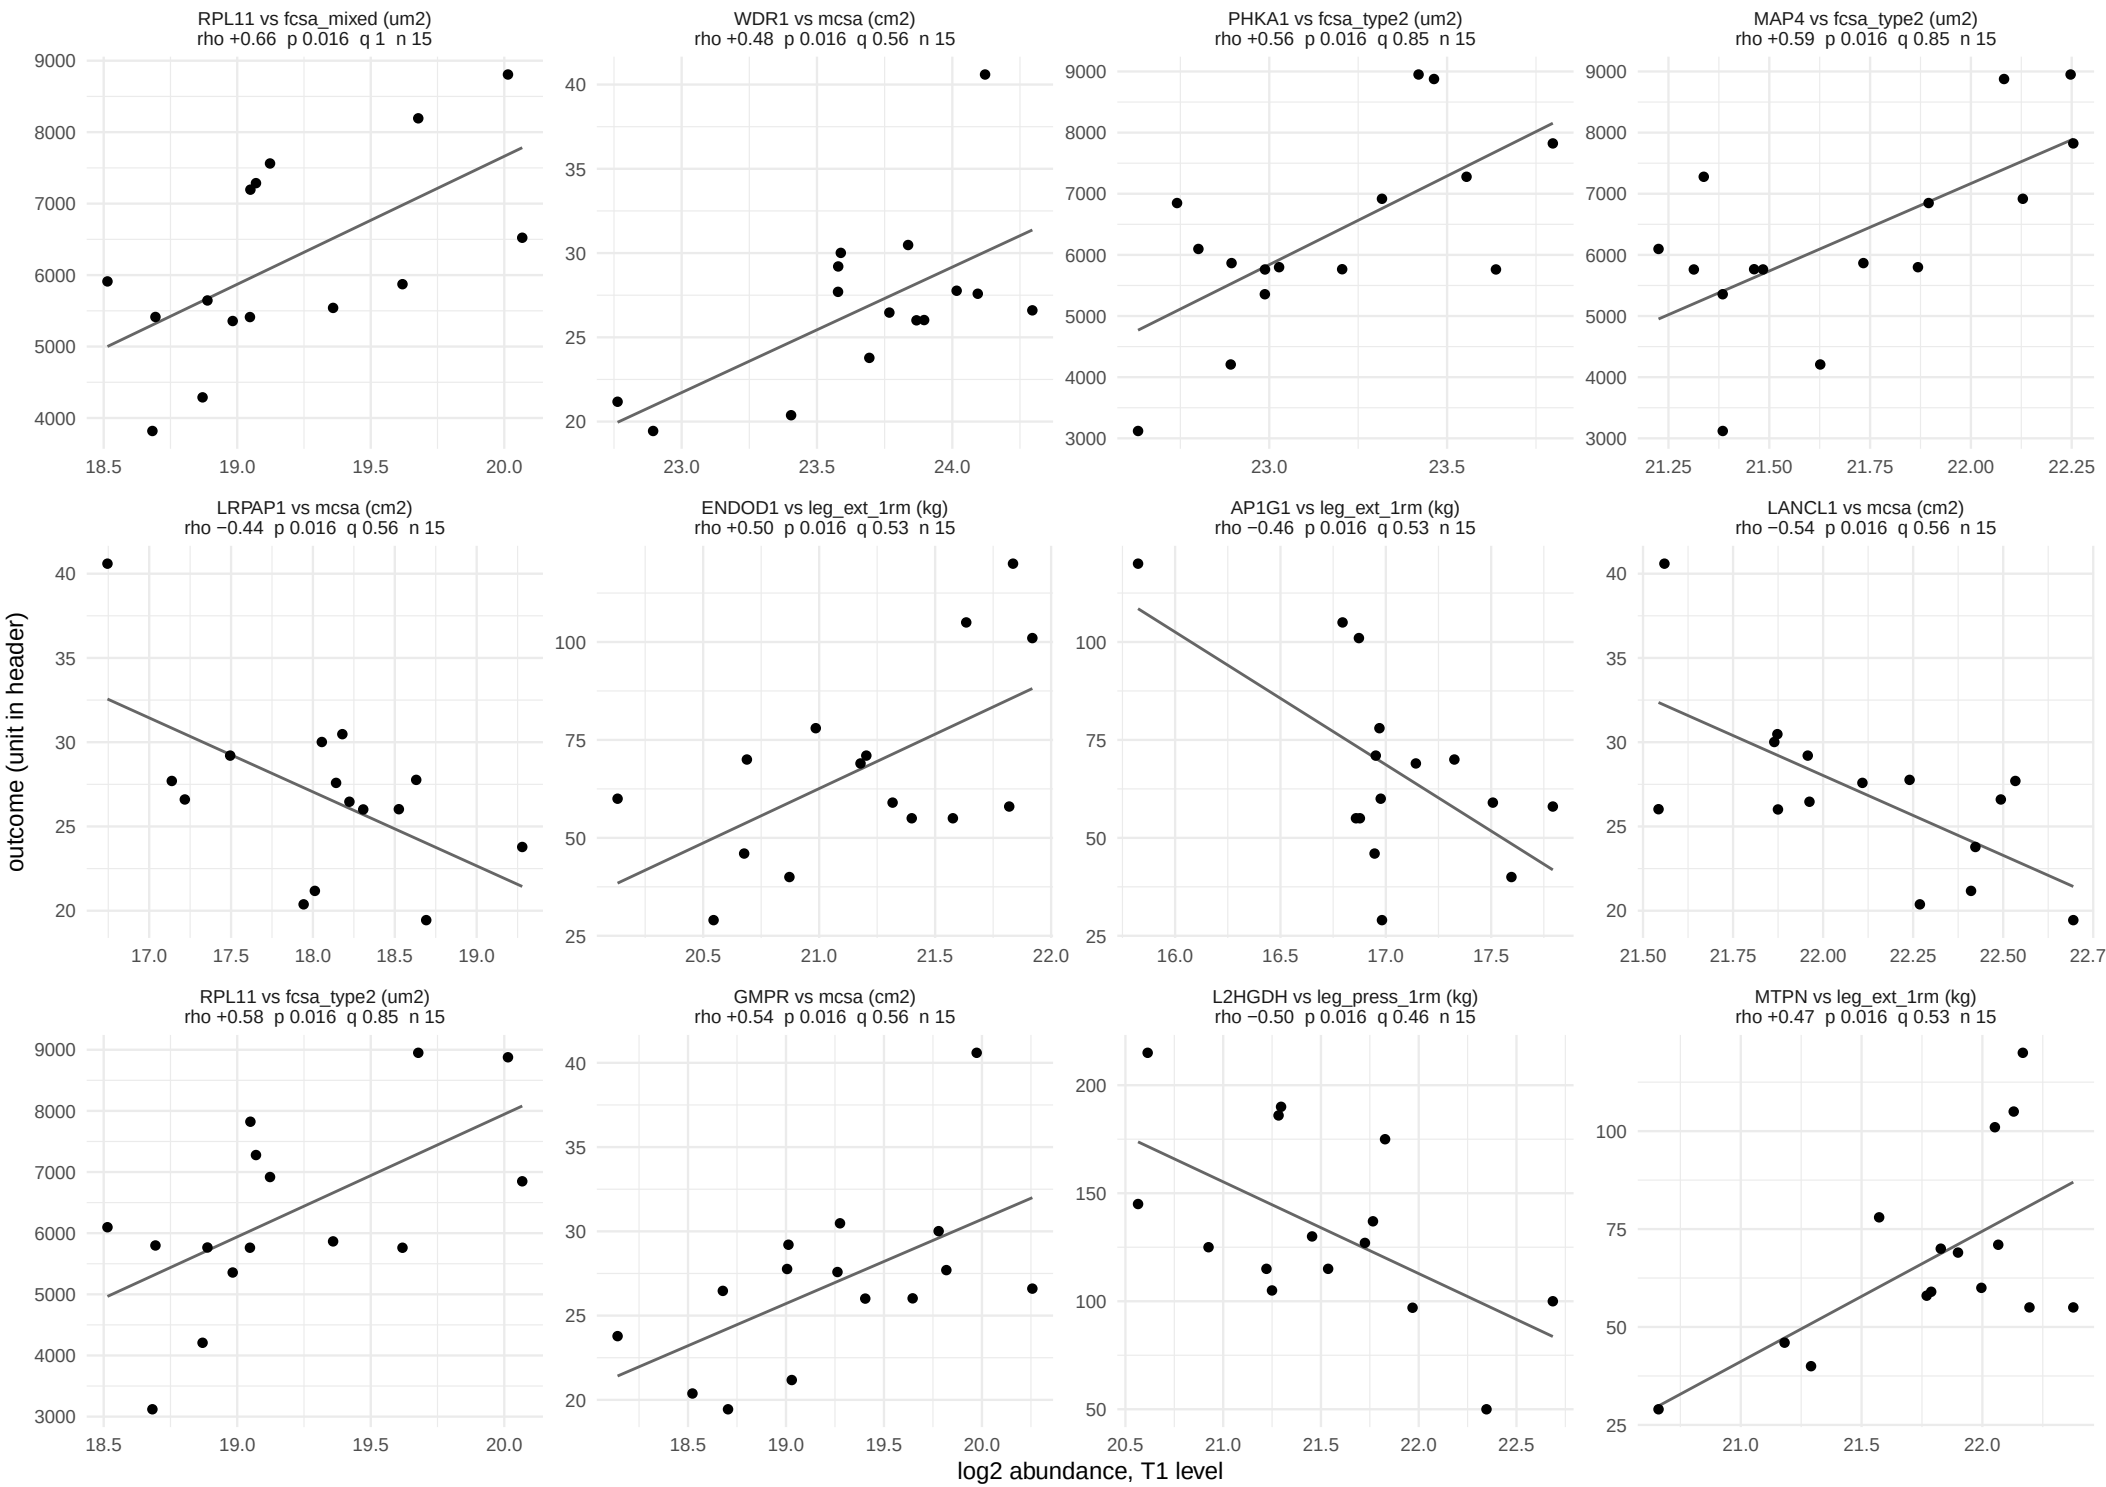

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline_level window


704 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 21 of 59.

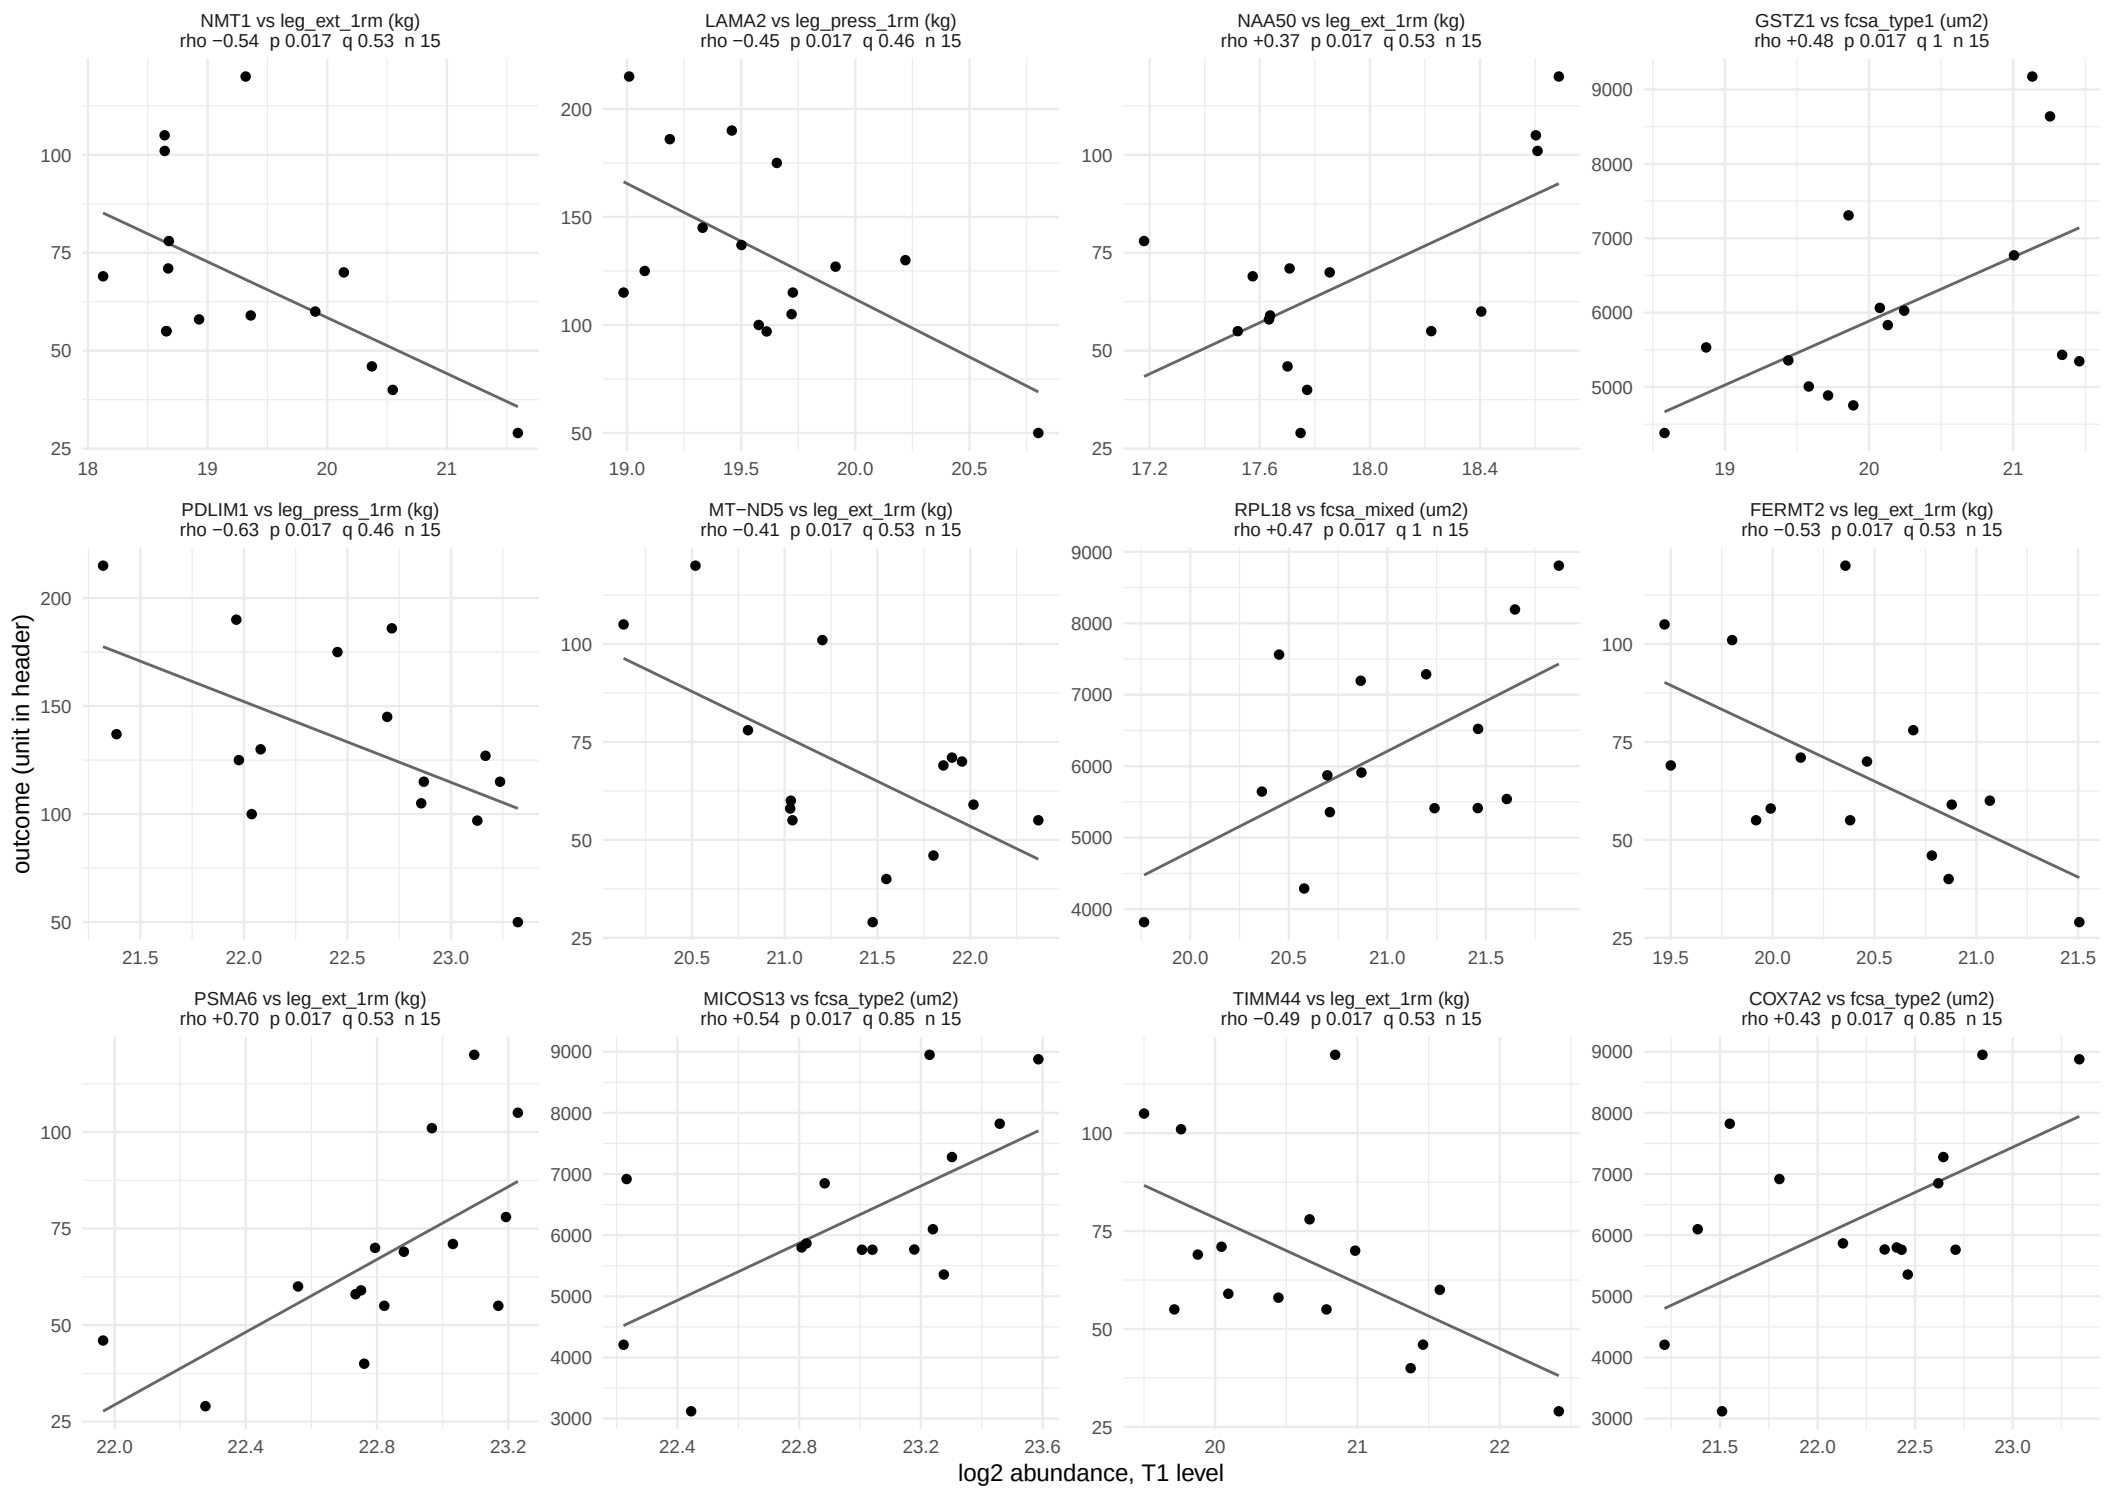

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline_level window


704 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 22 of 59.

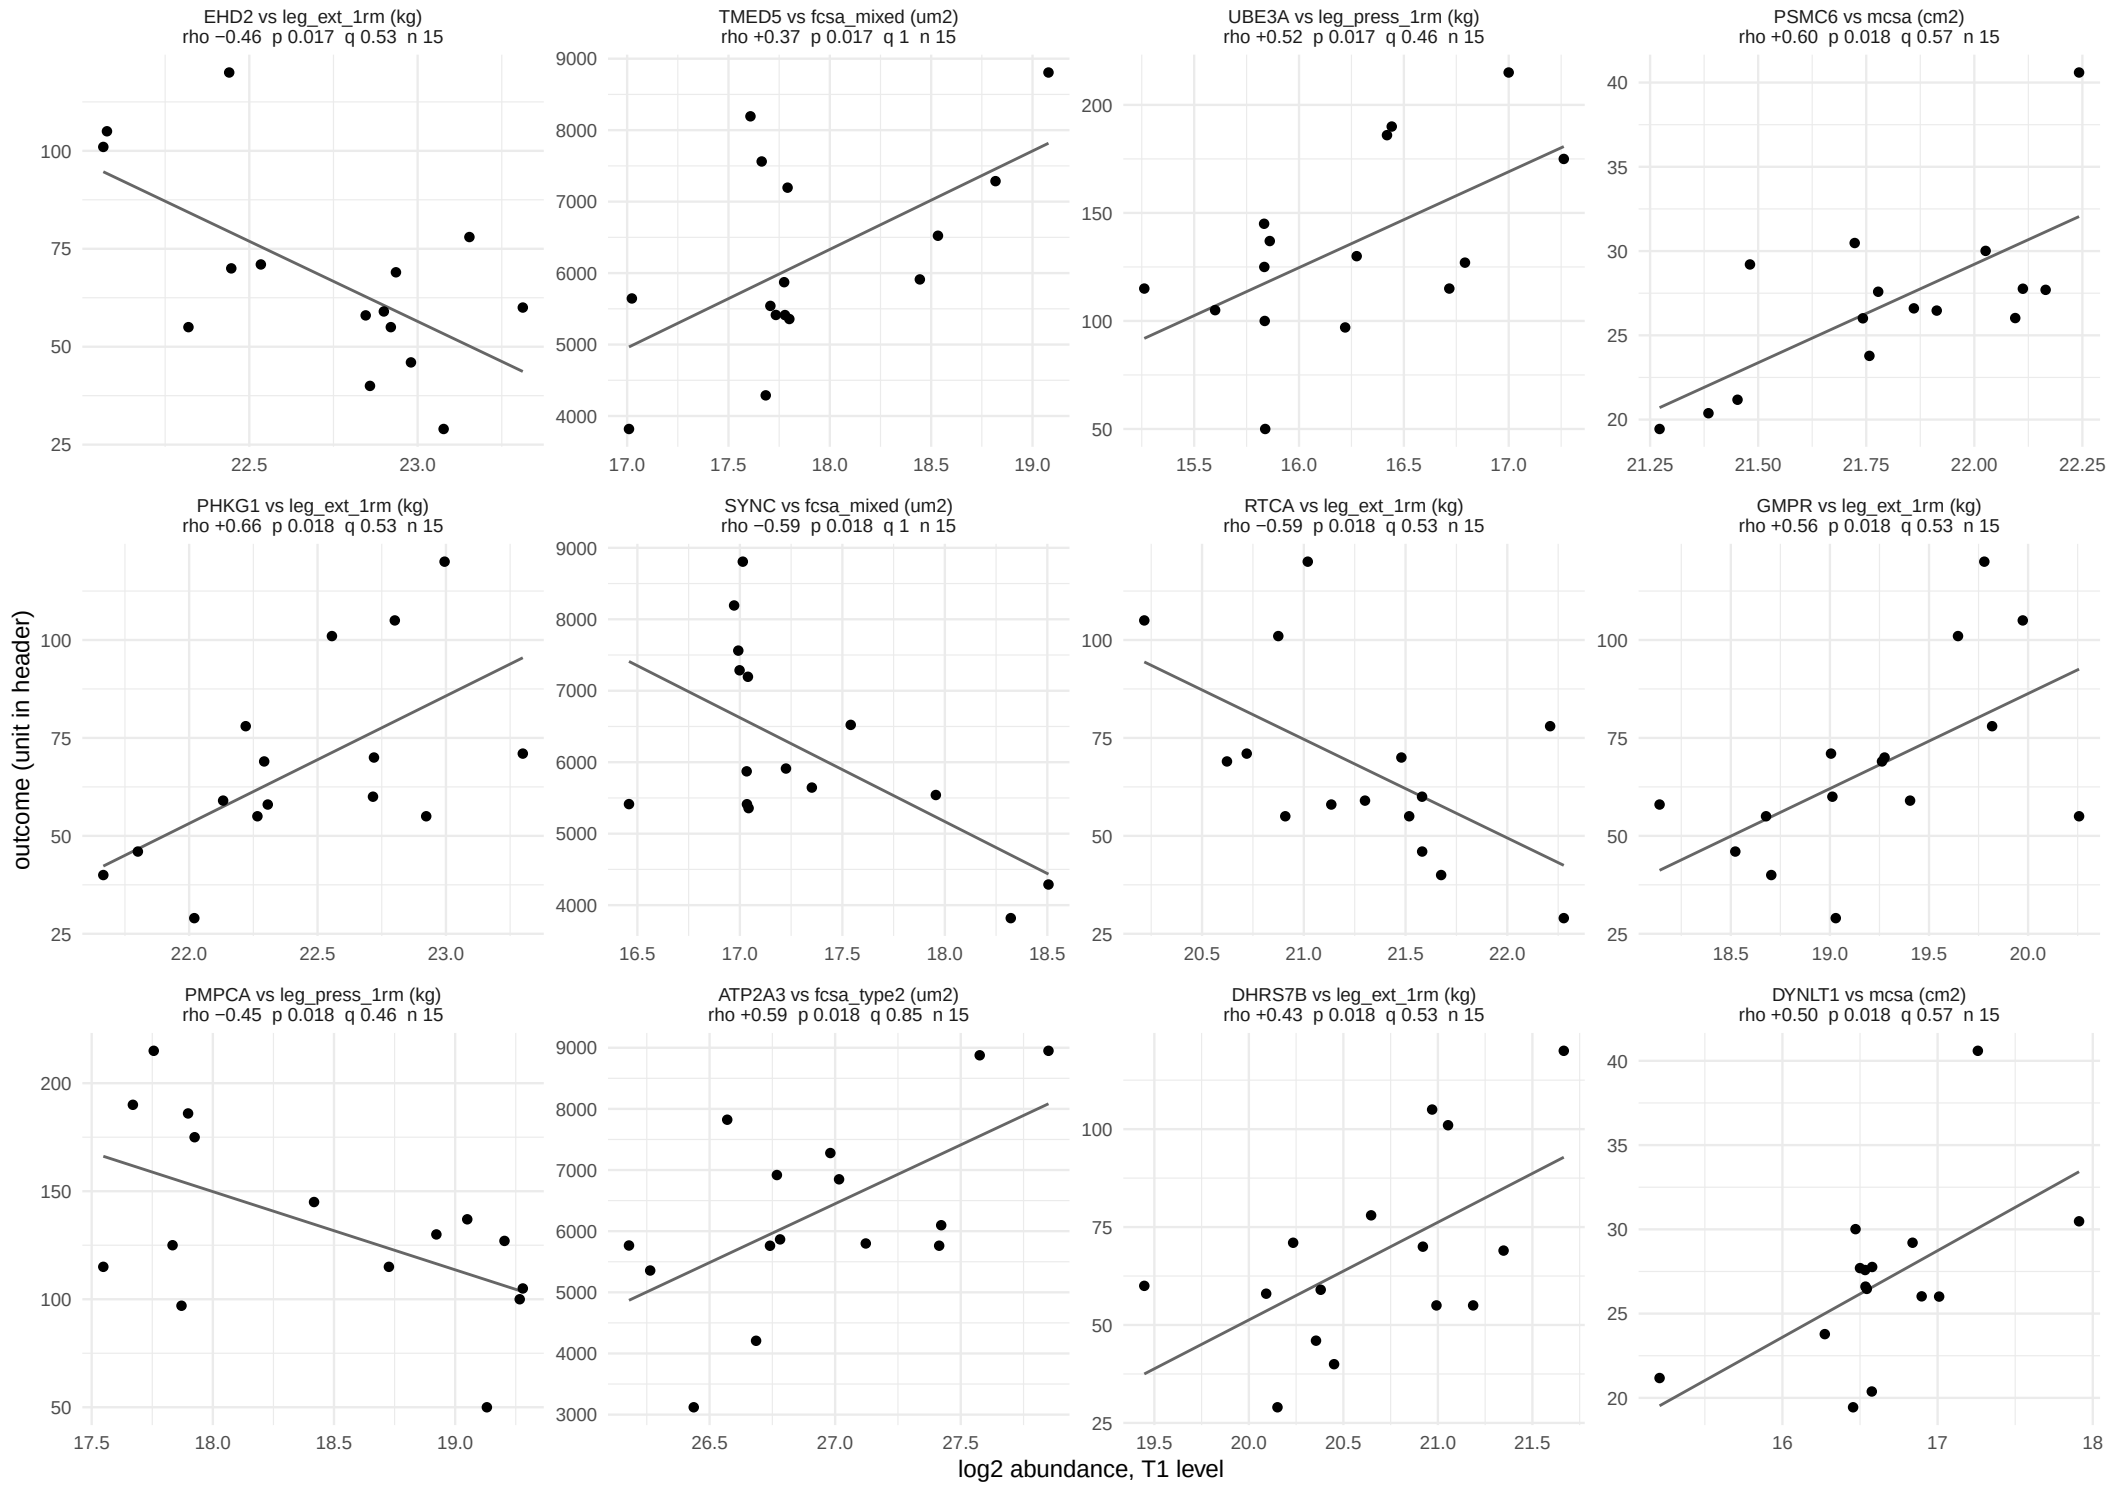

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline_level window


704 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 23 of 59.

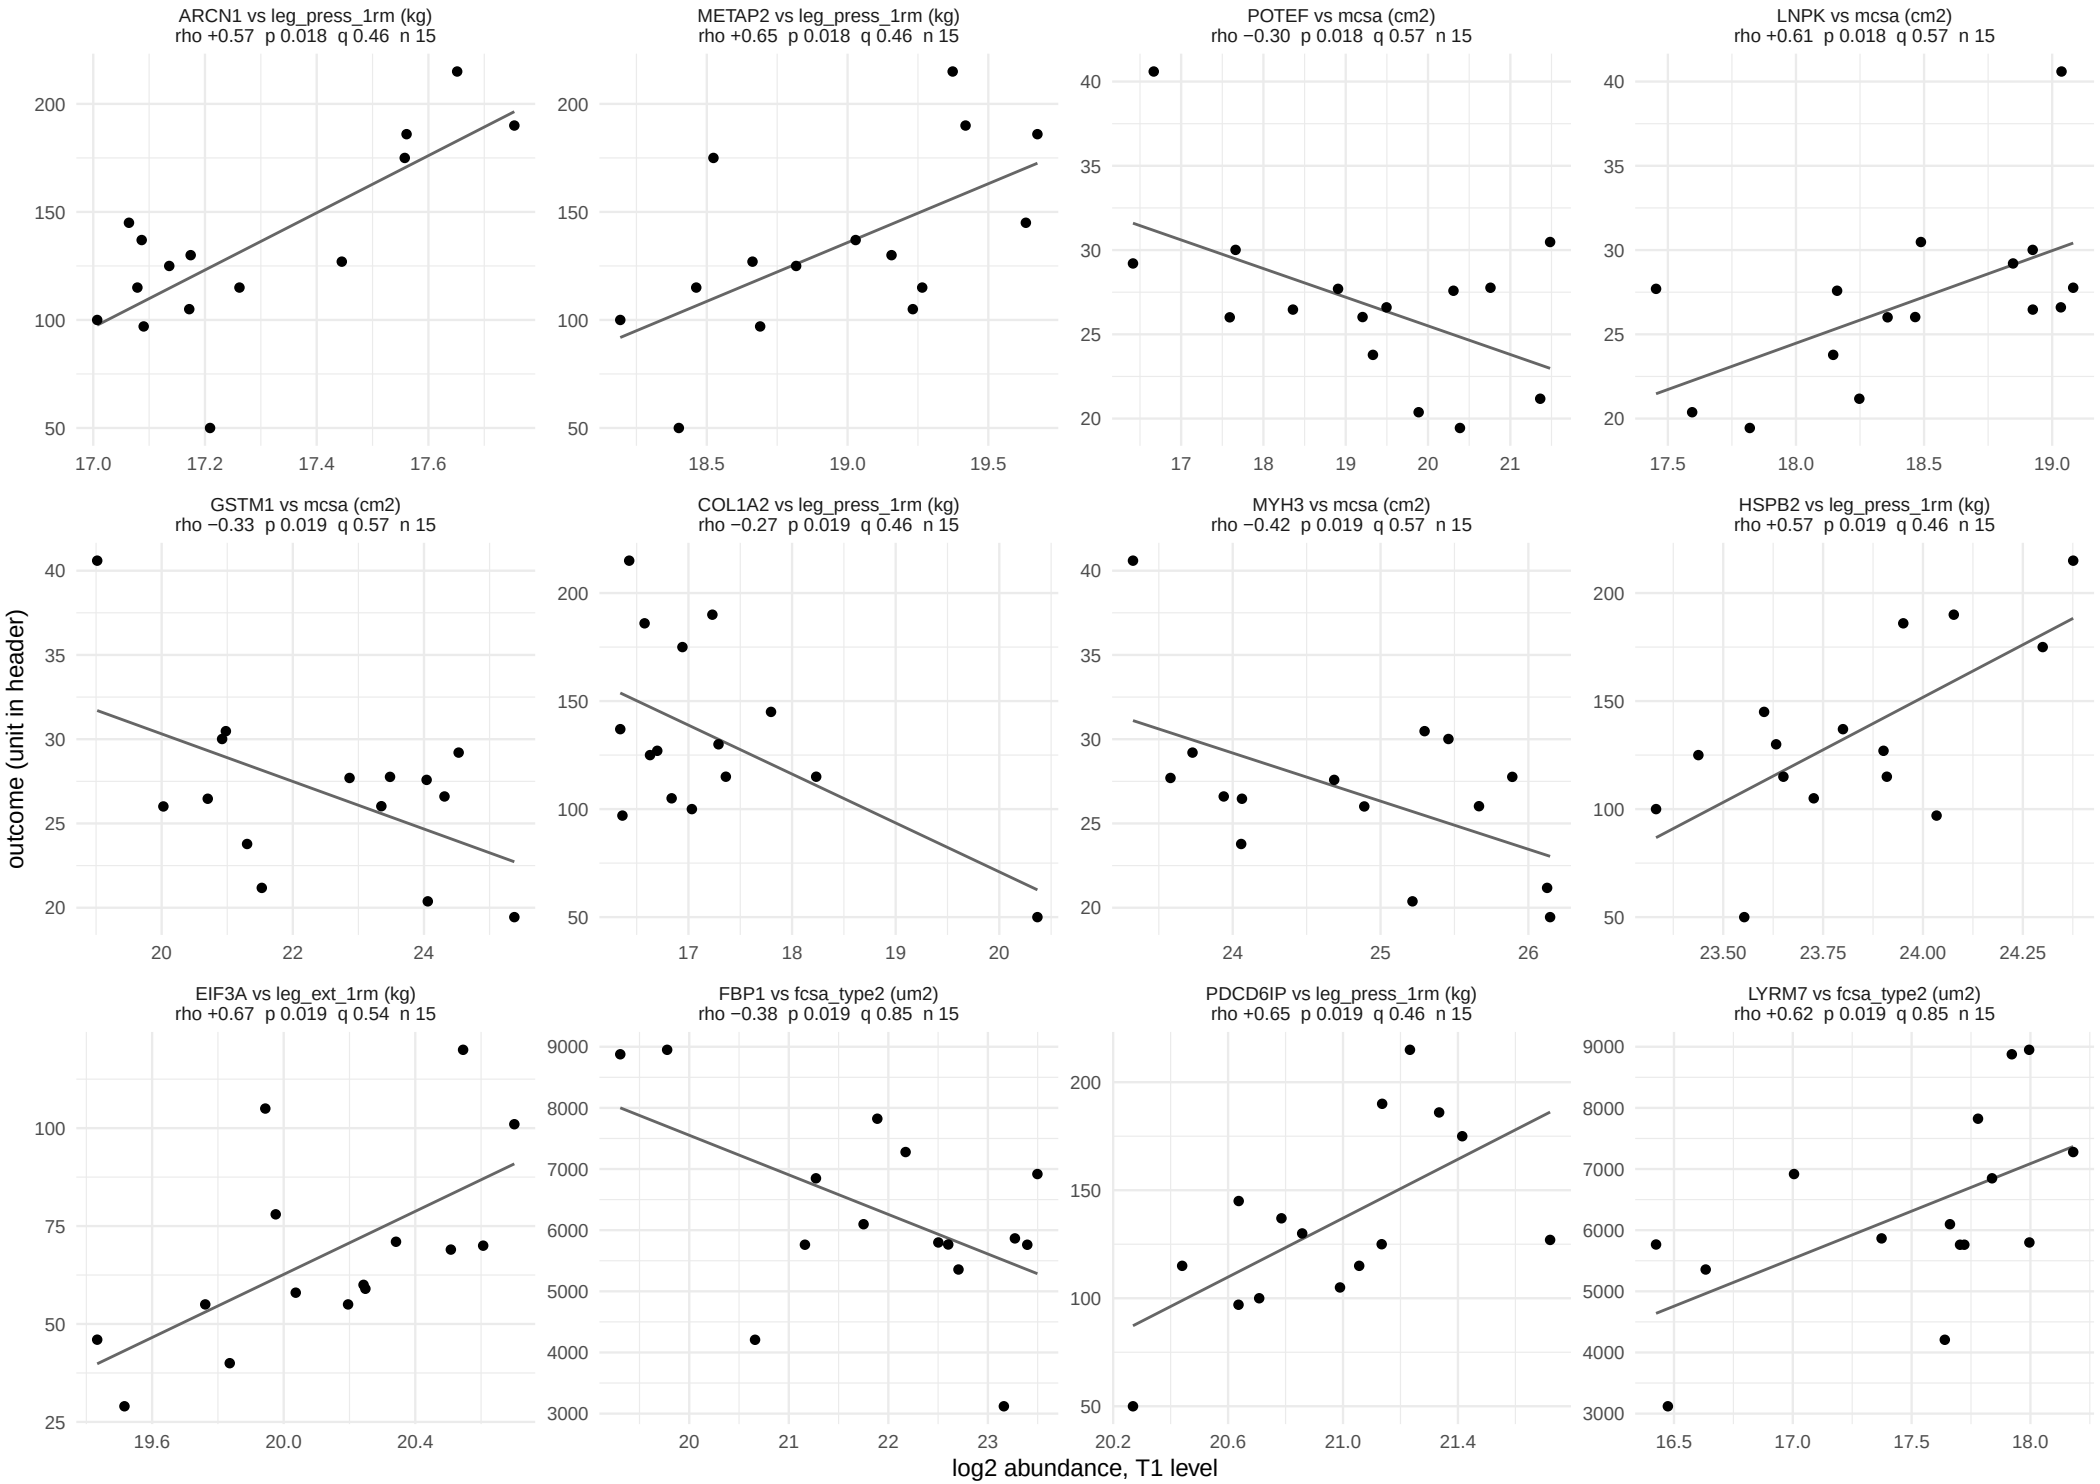

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline_level window


704 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 24 of 59.

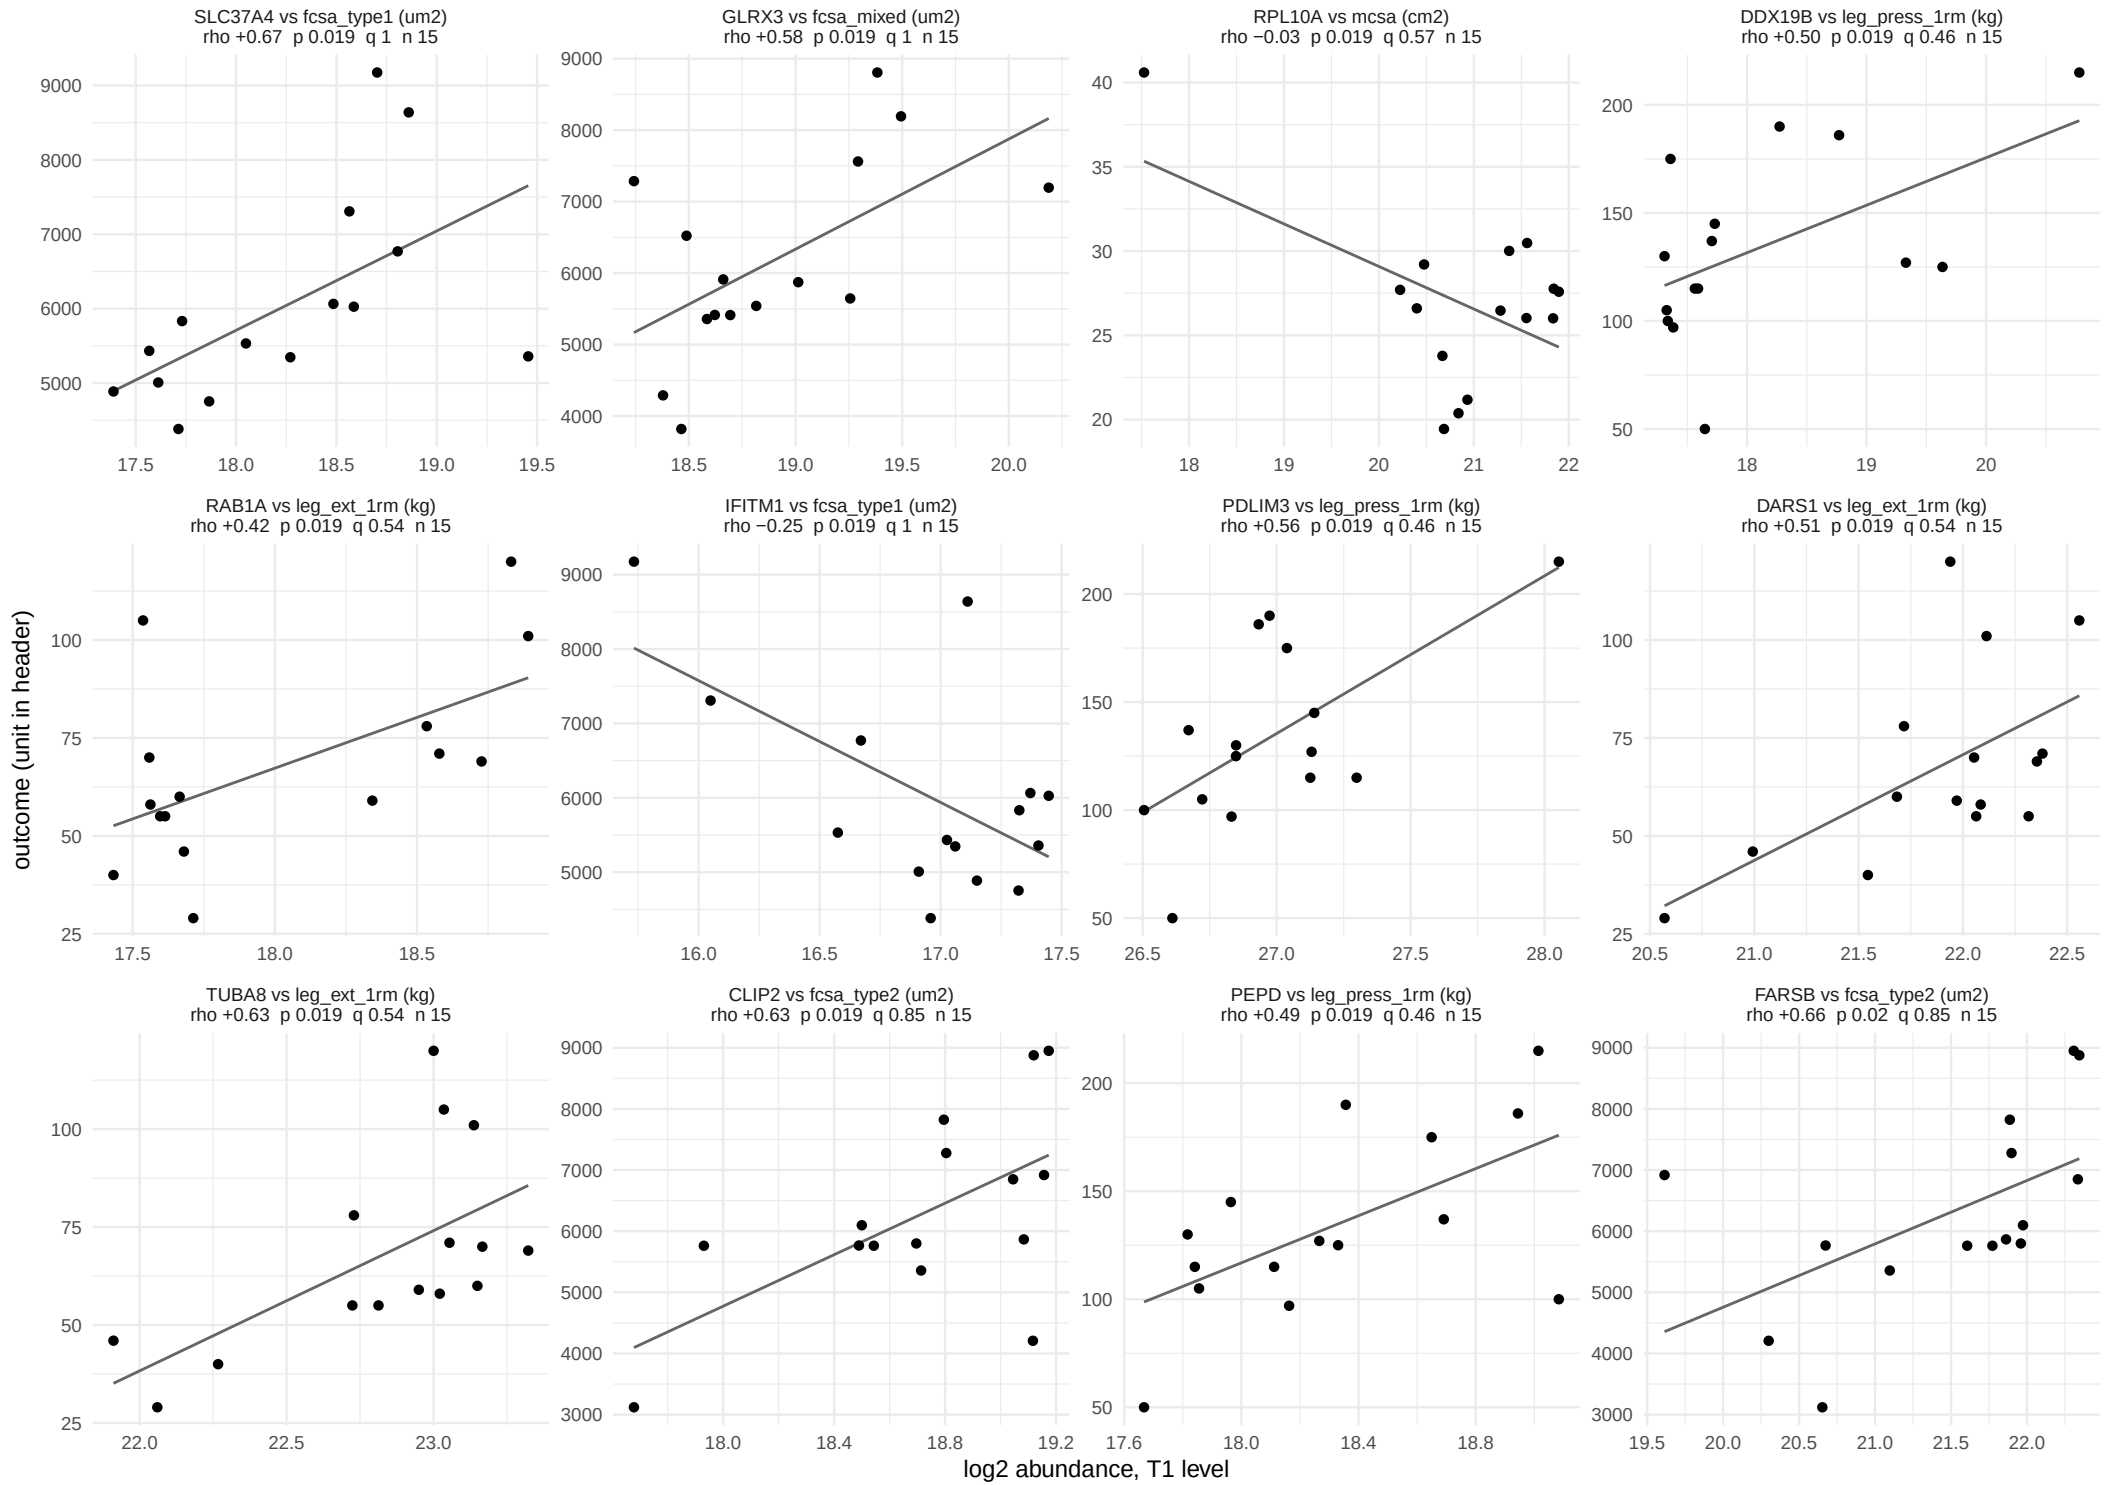

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline_level window


704 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 25 of 59.

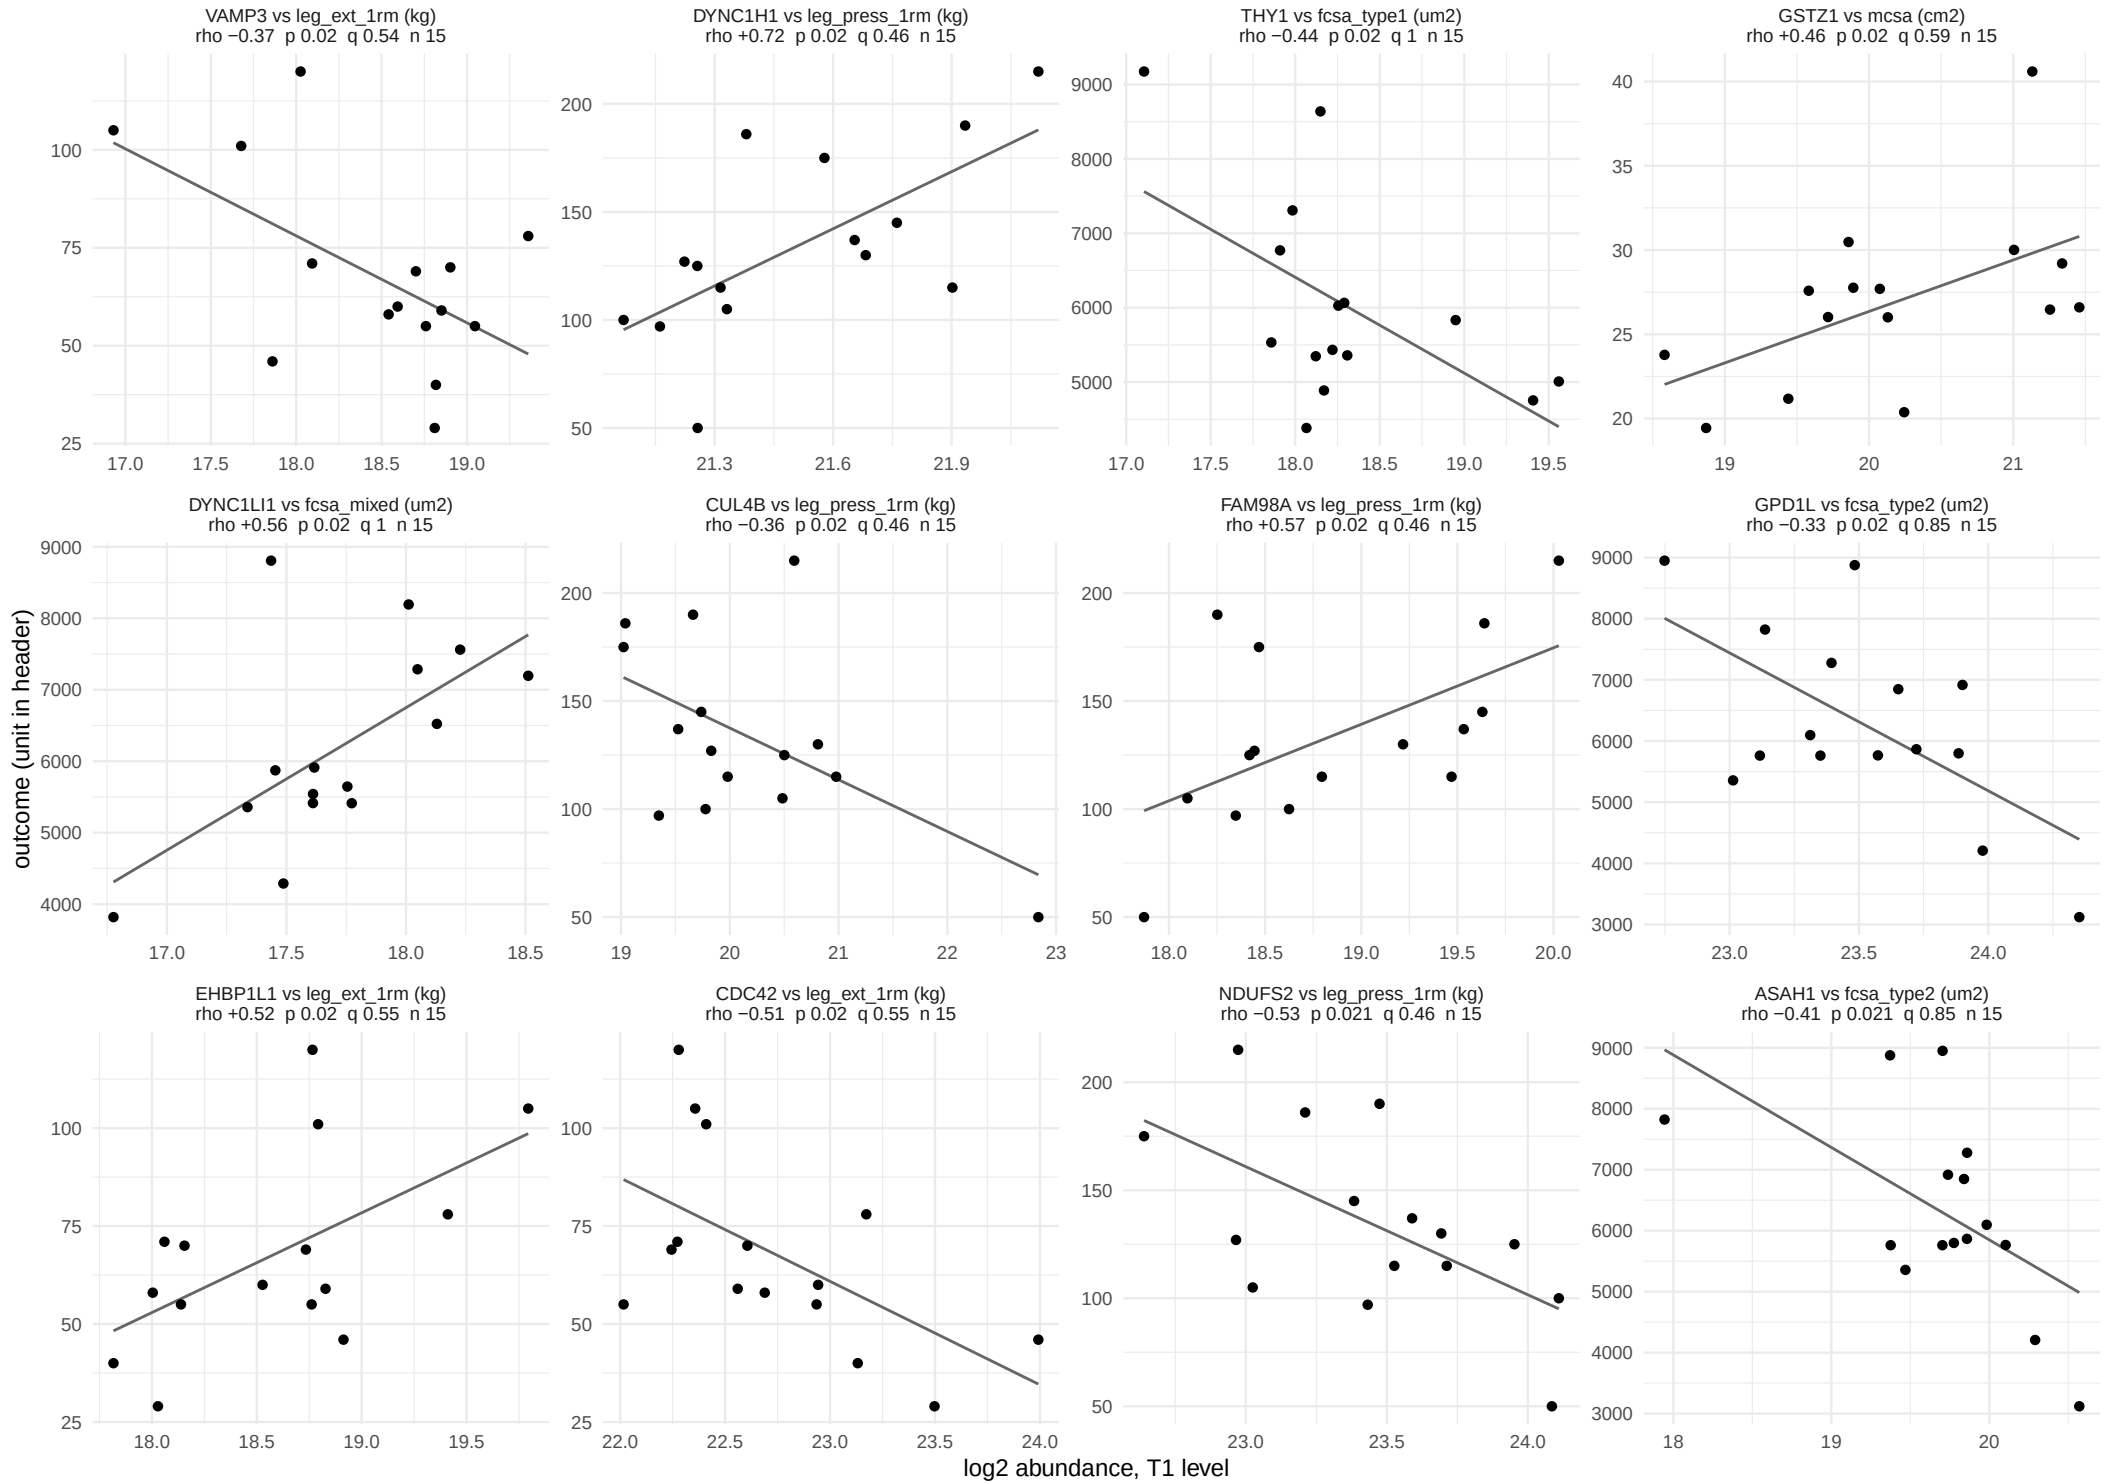

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline_level window


704 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 26 of 59.

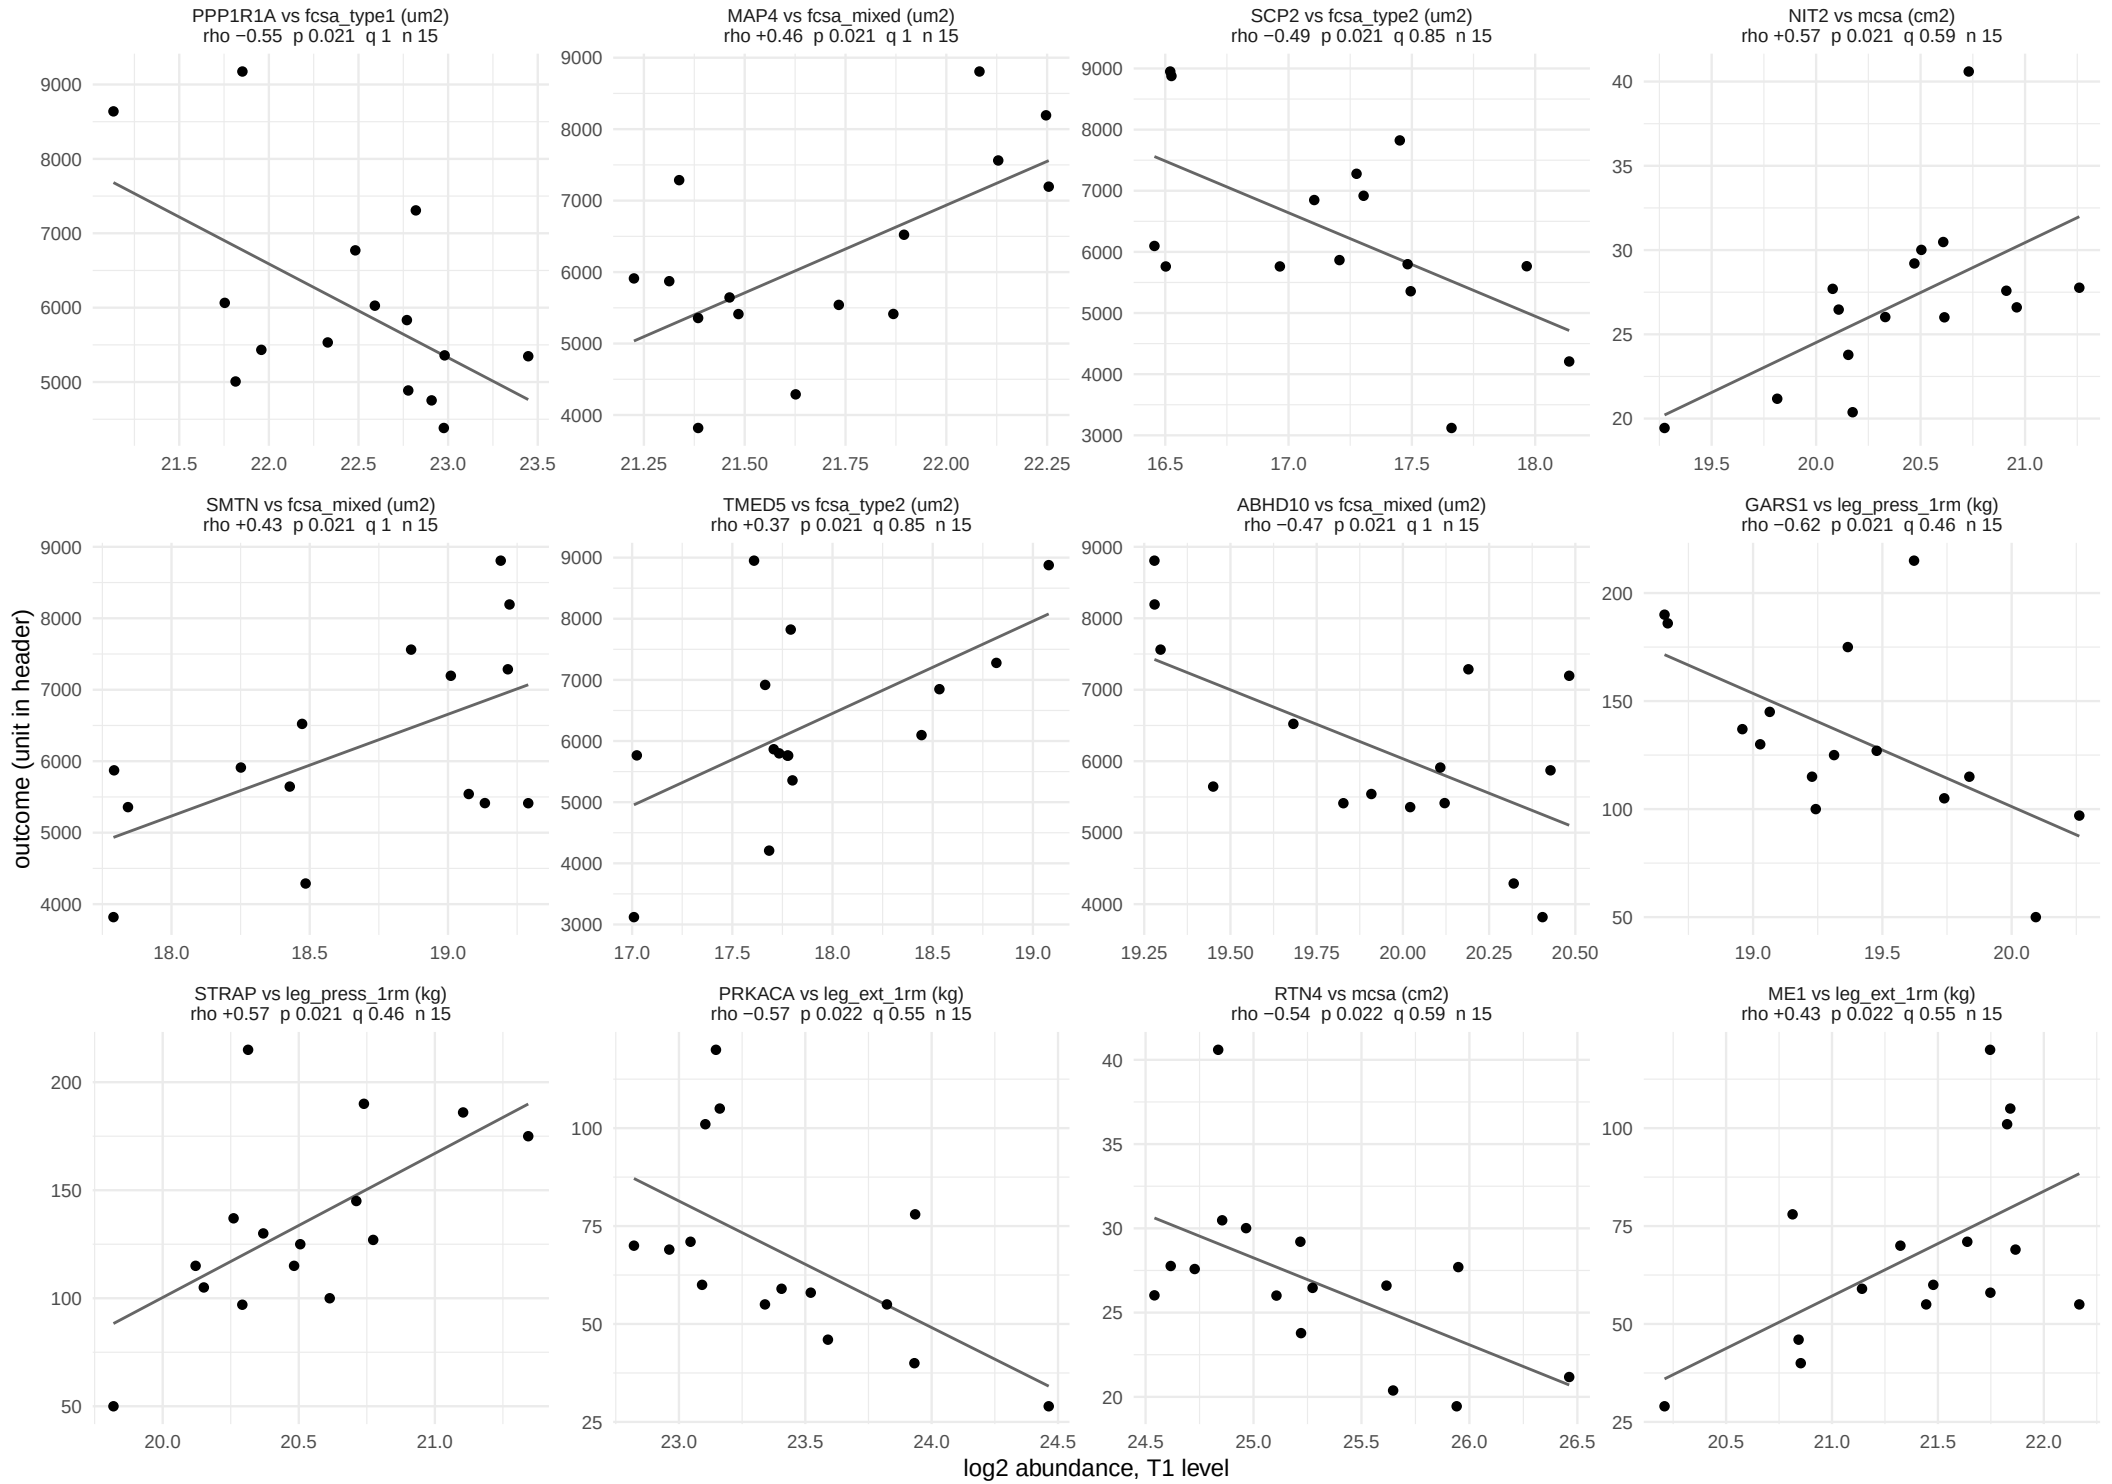

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline_level window


704 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 27 of 59.

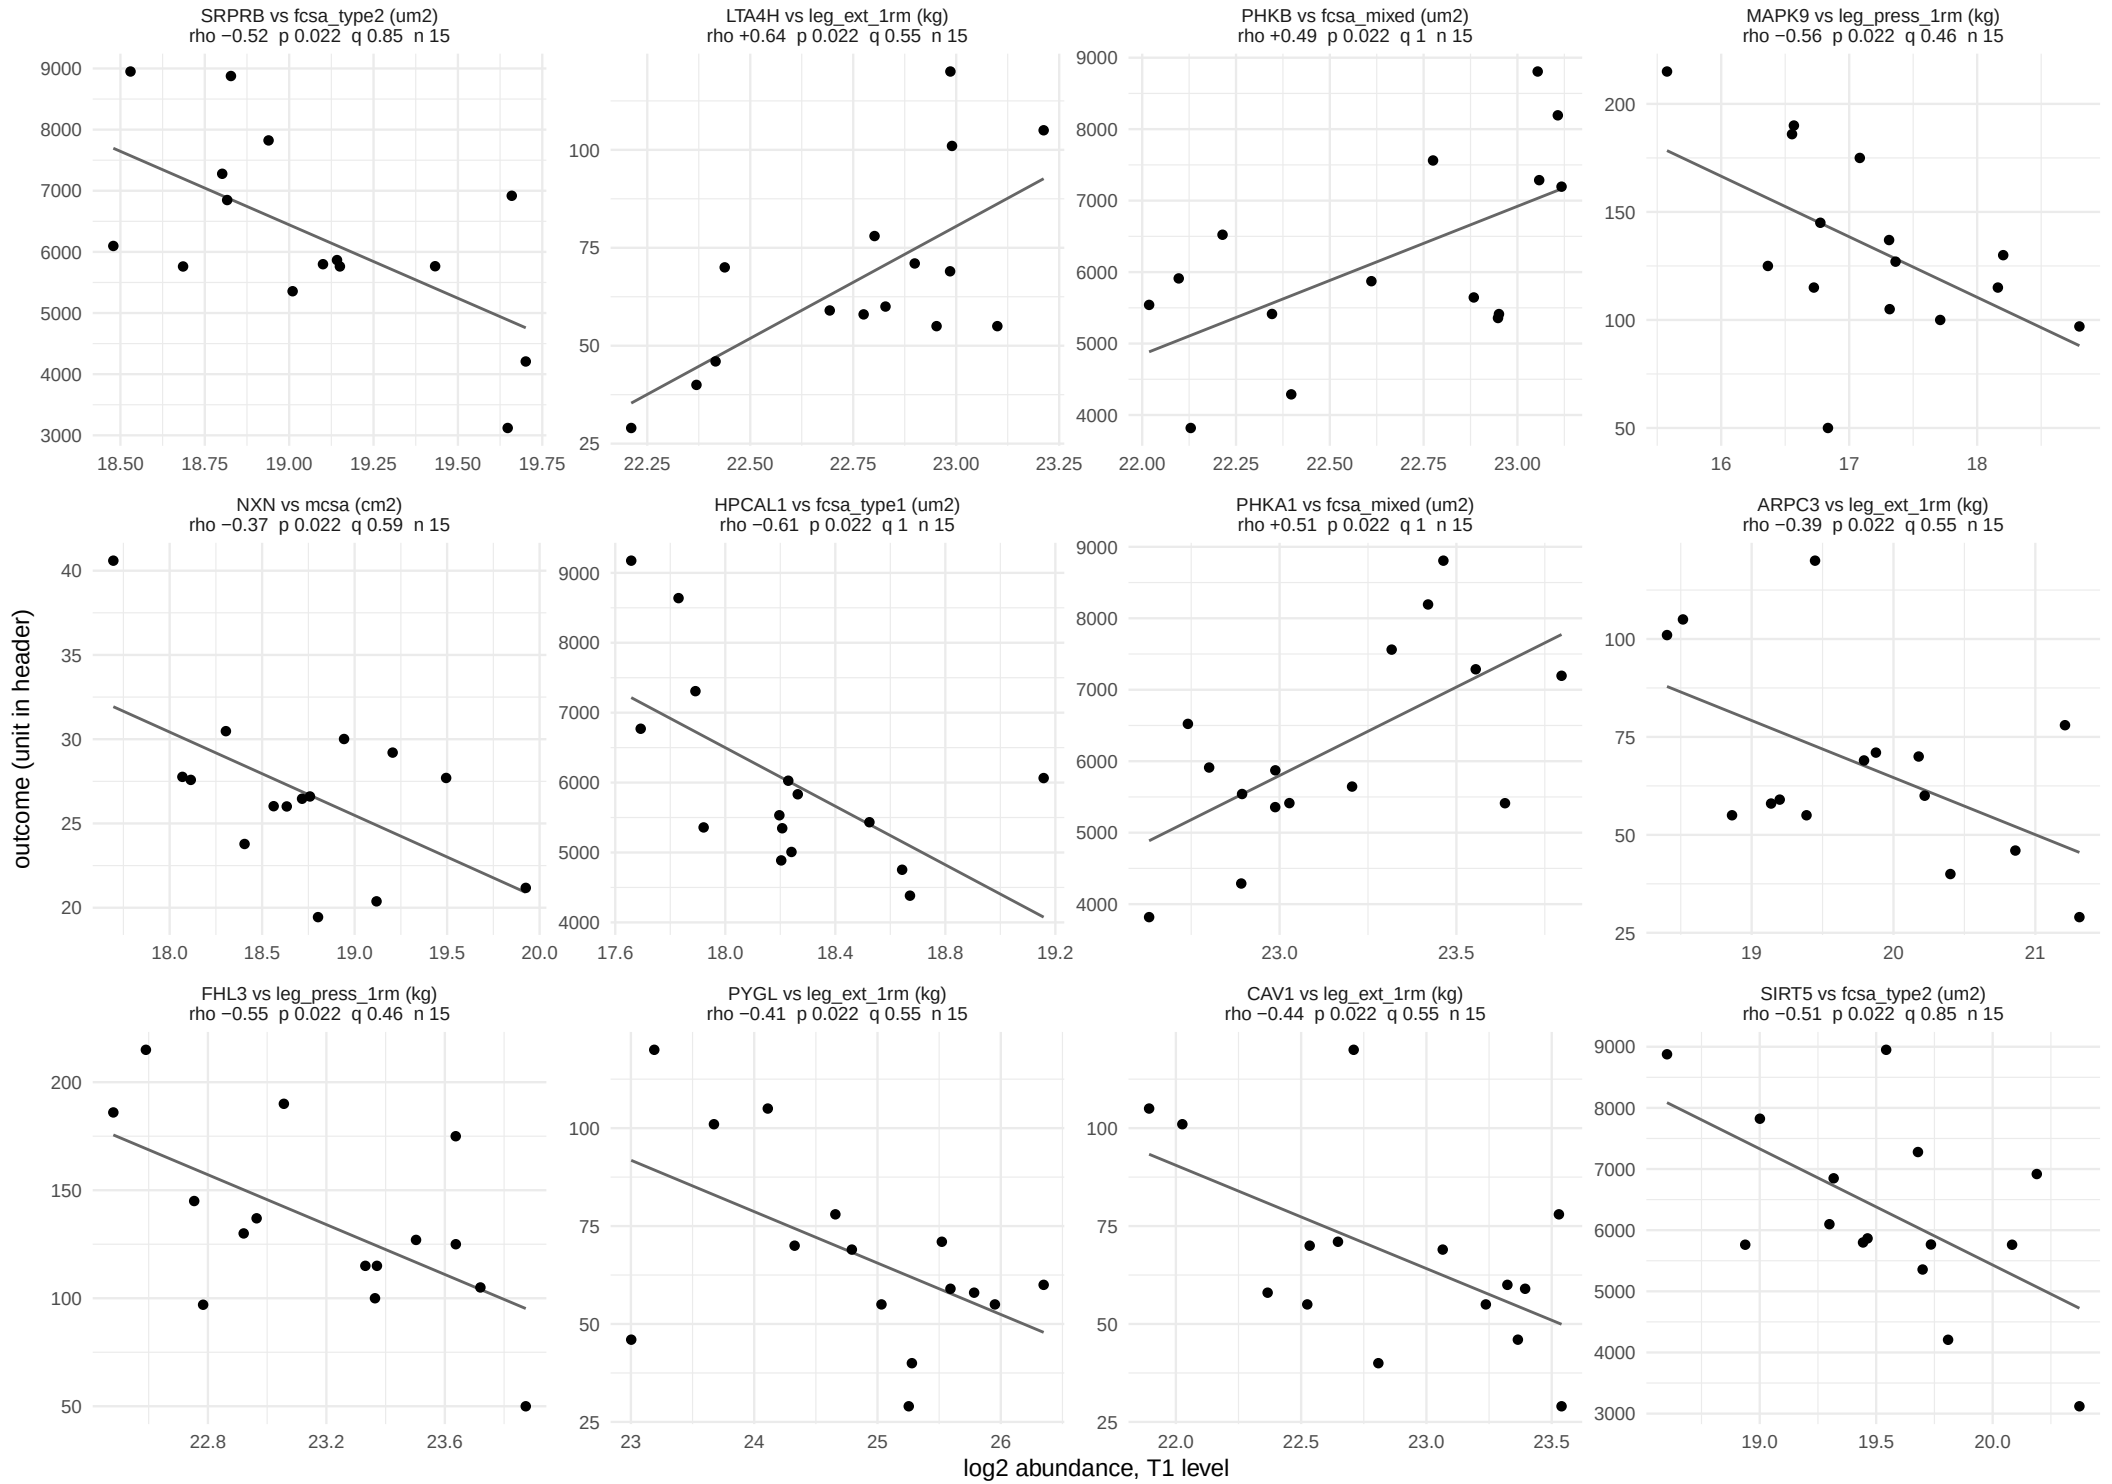

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline_level window


704 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 28 of 59.

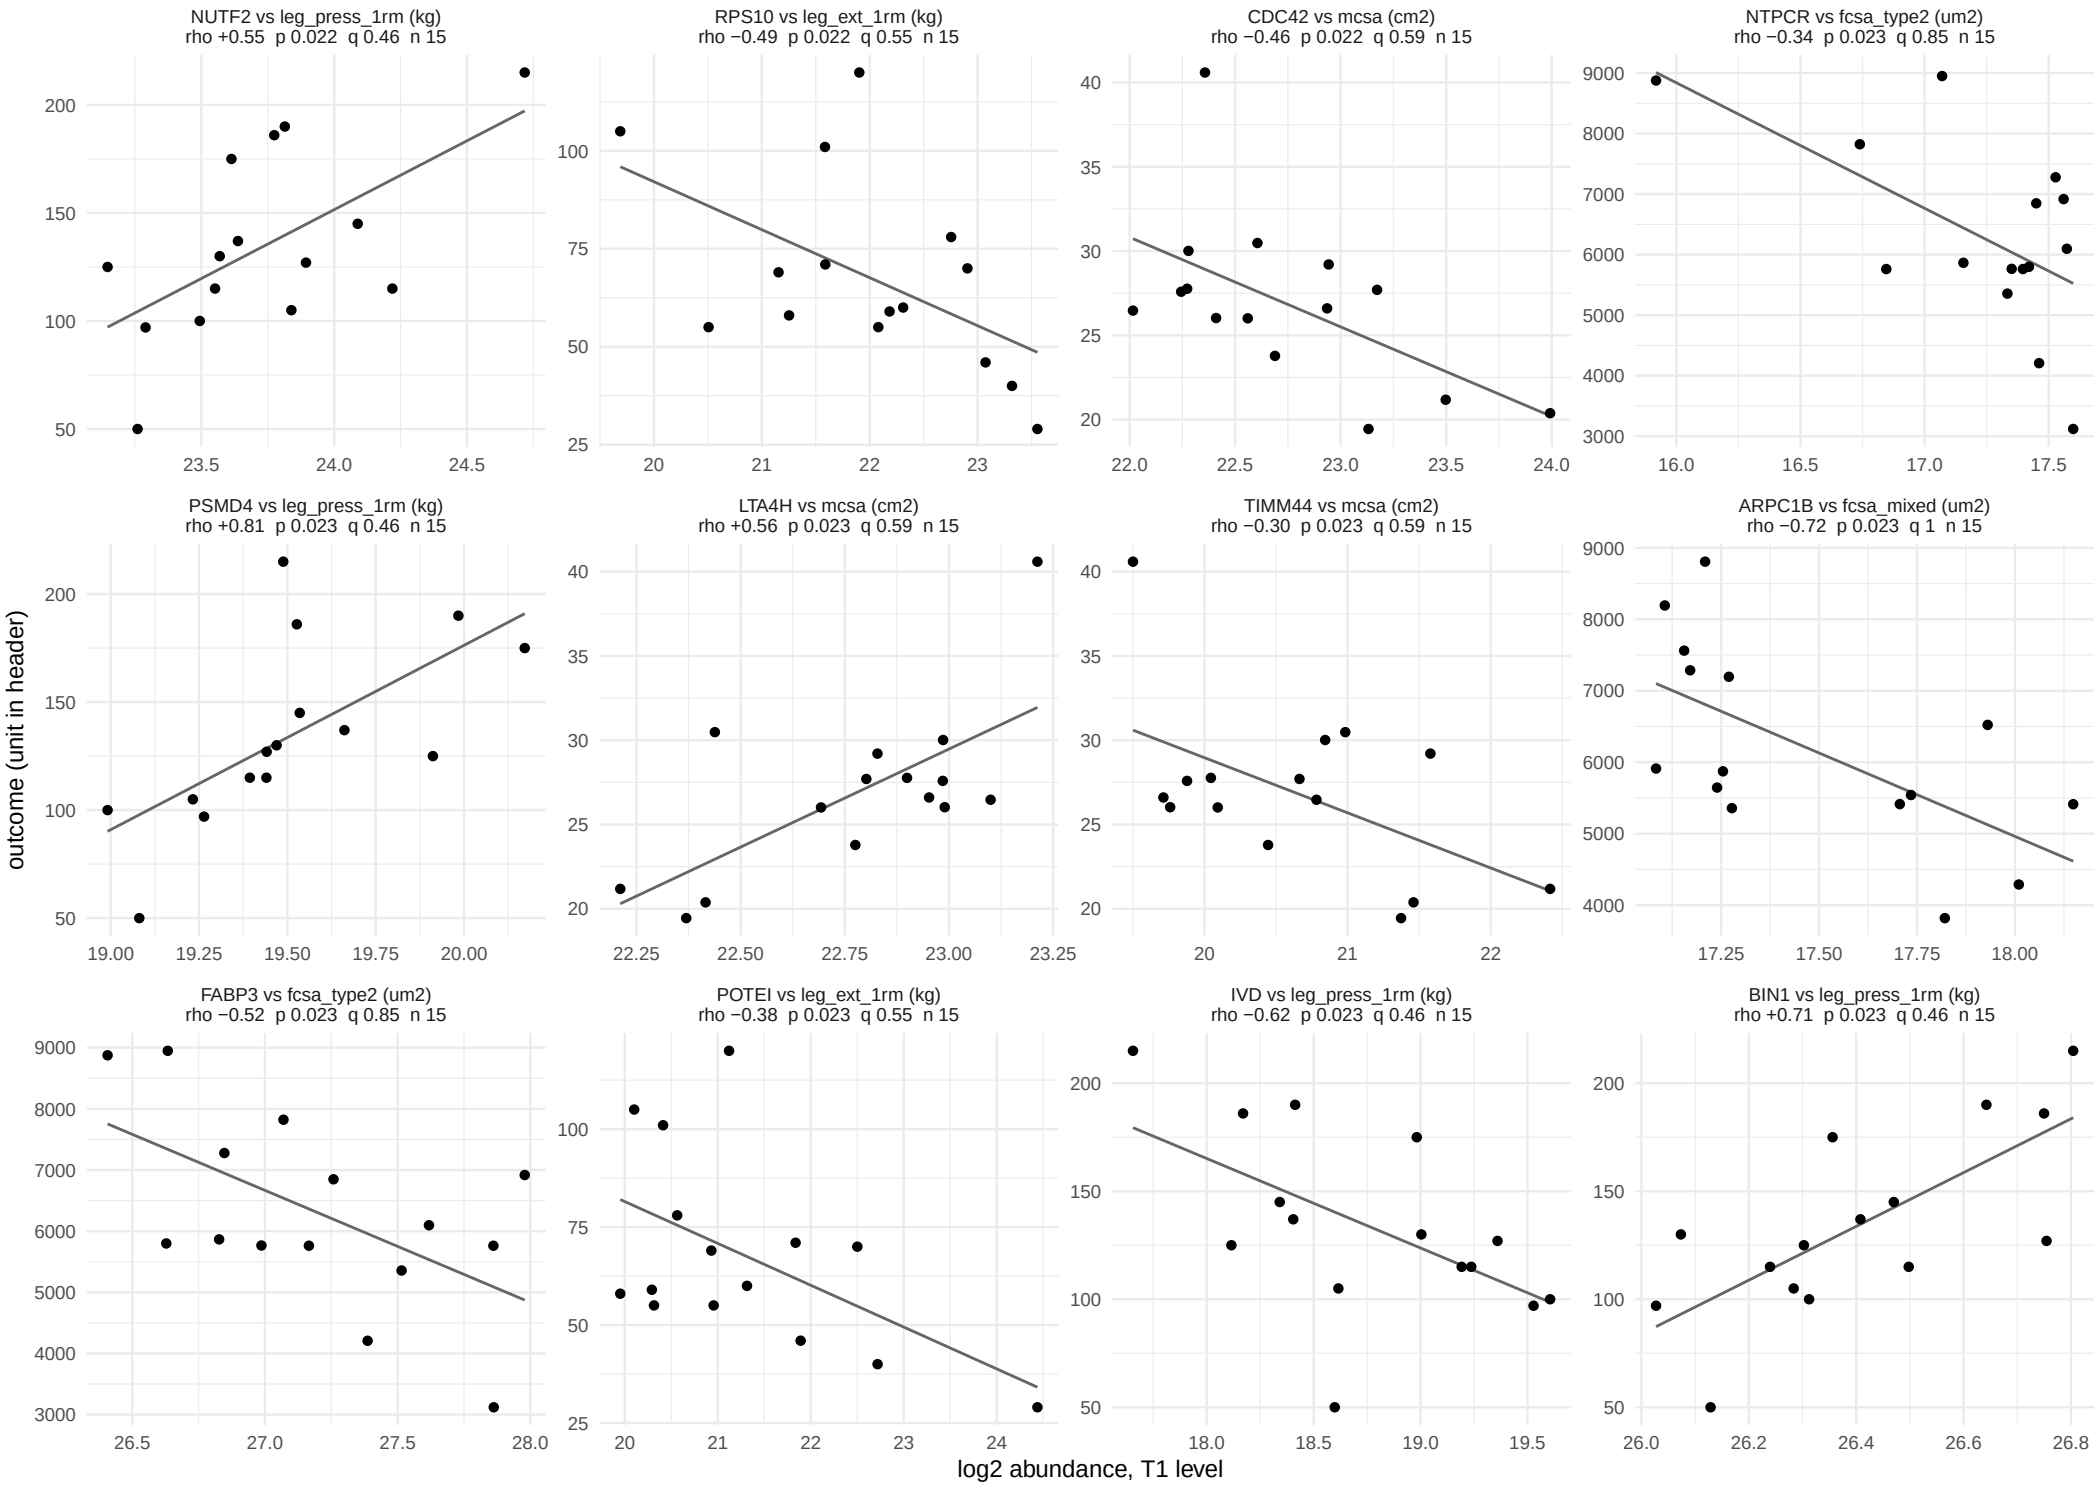

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline_level window


704 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 29 of 59.

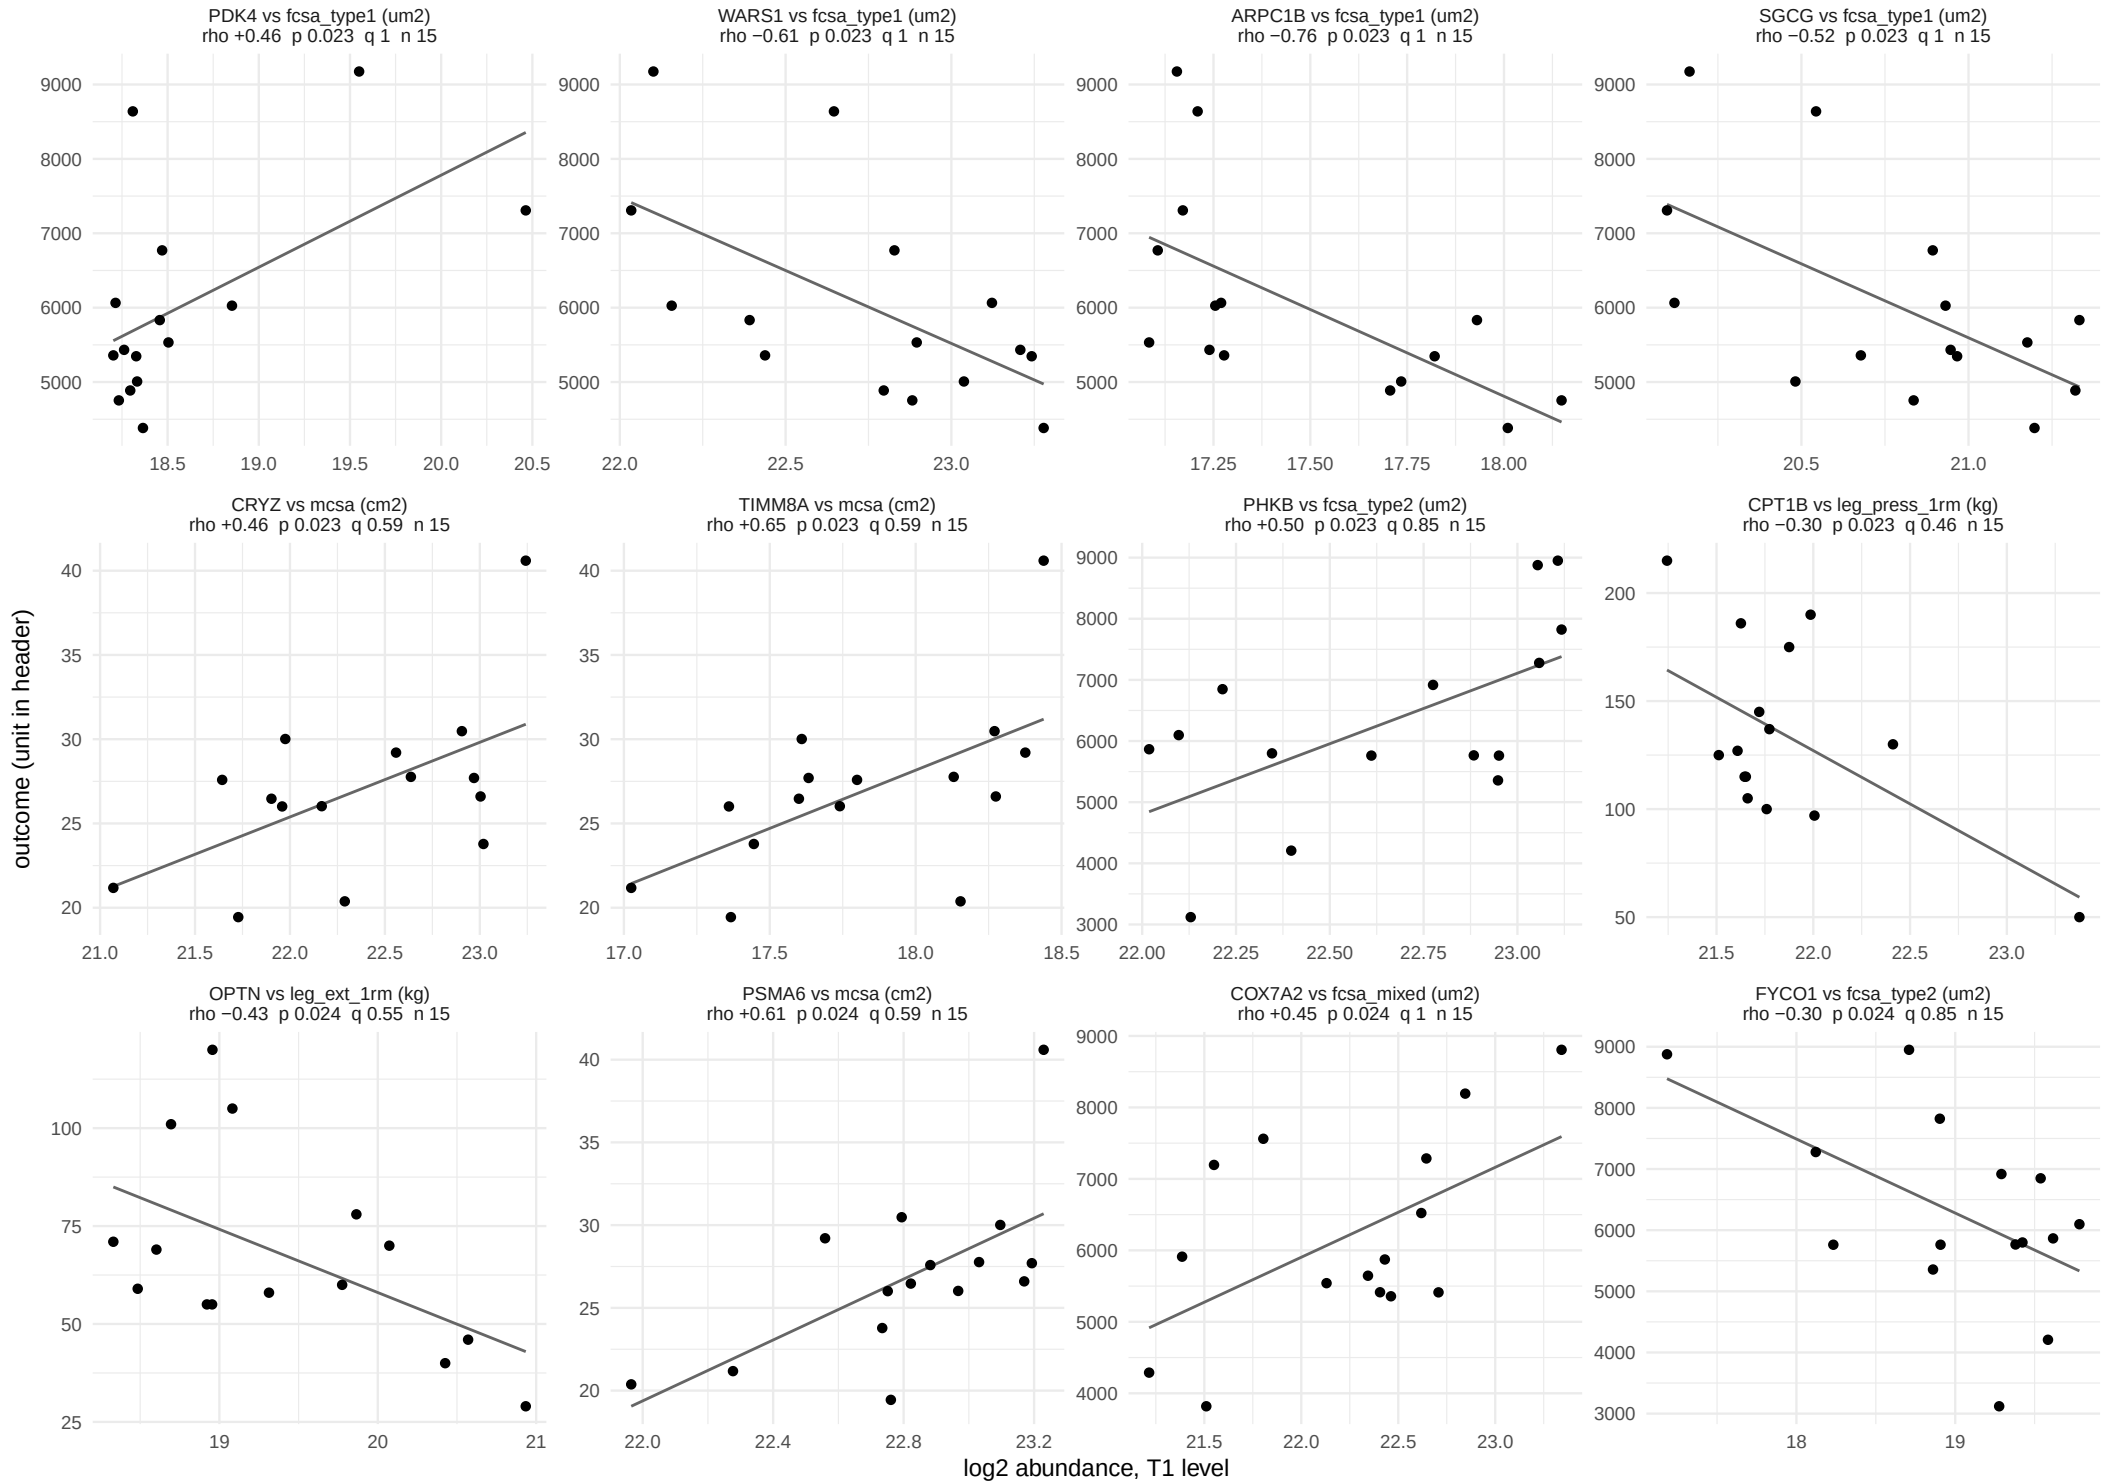

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline_level window


704 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 30 of 59.

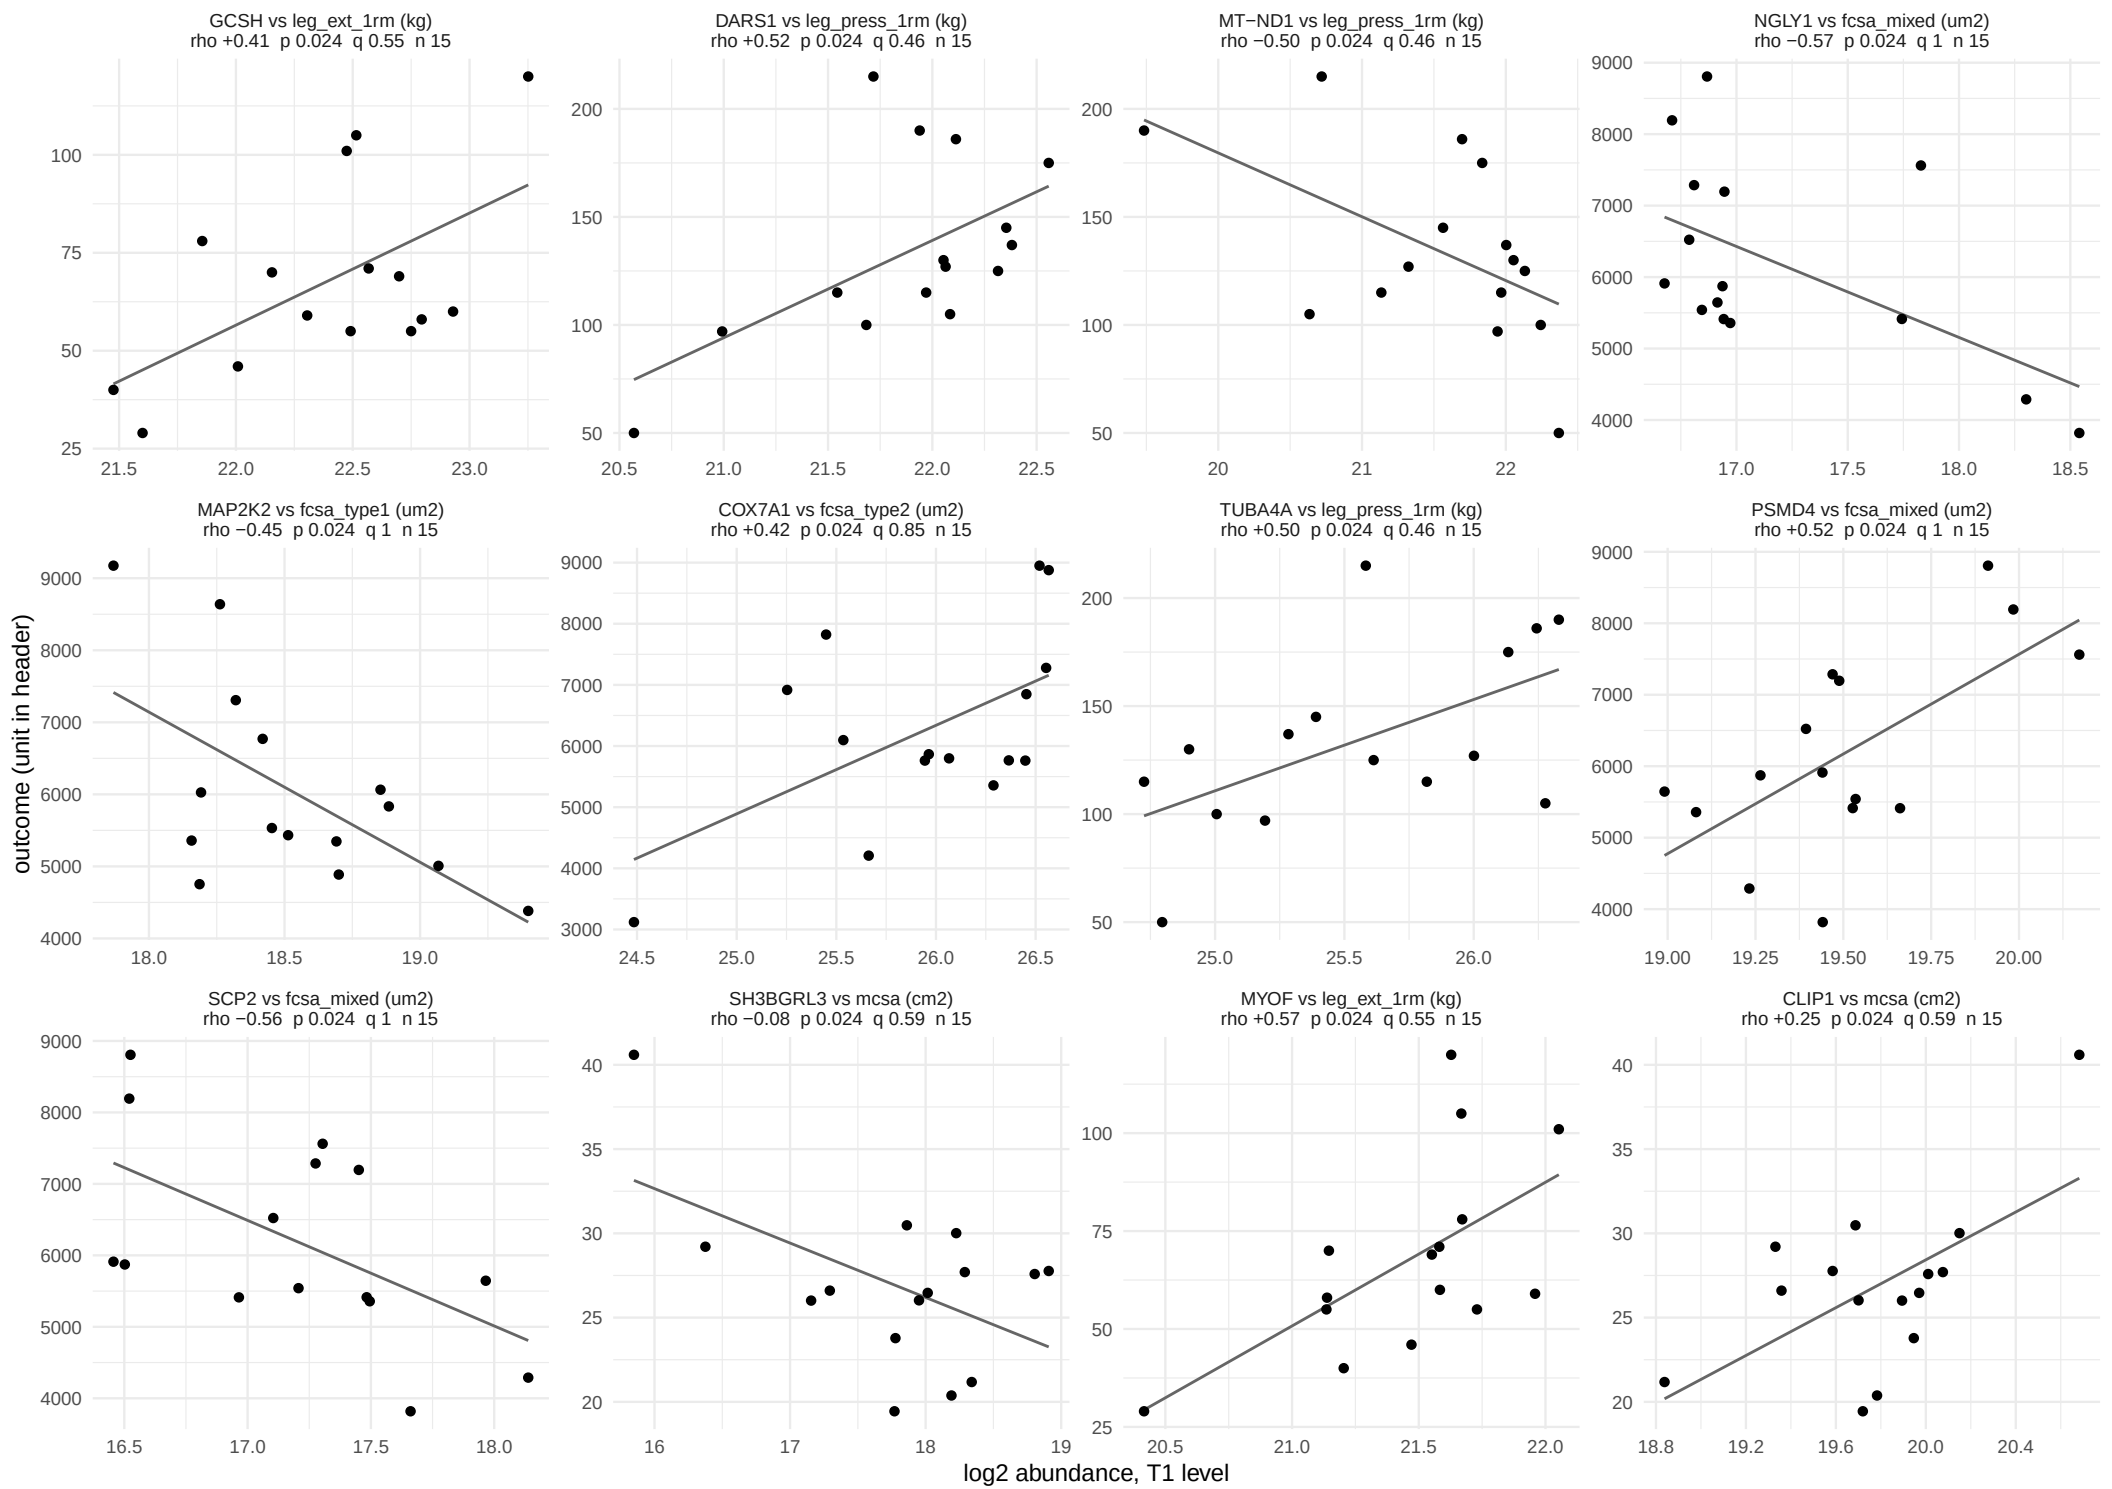

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline_level window


704 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 31 of 59.

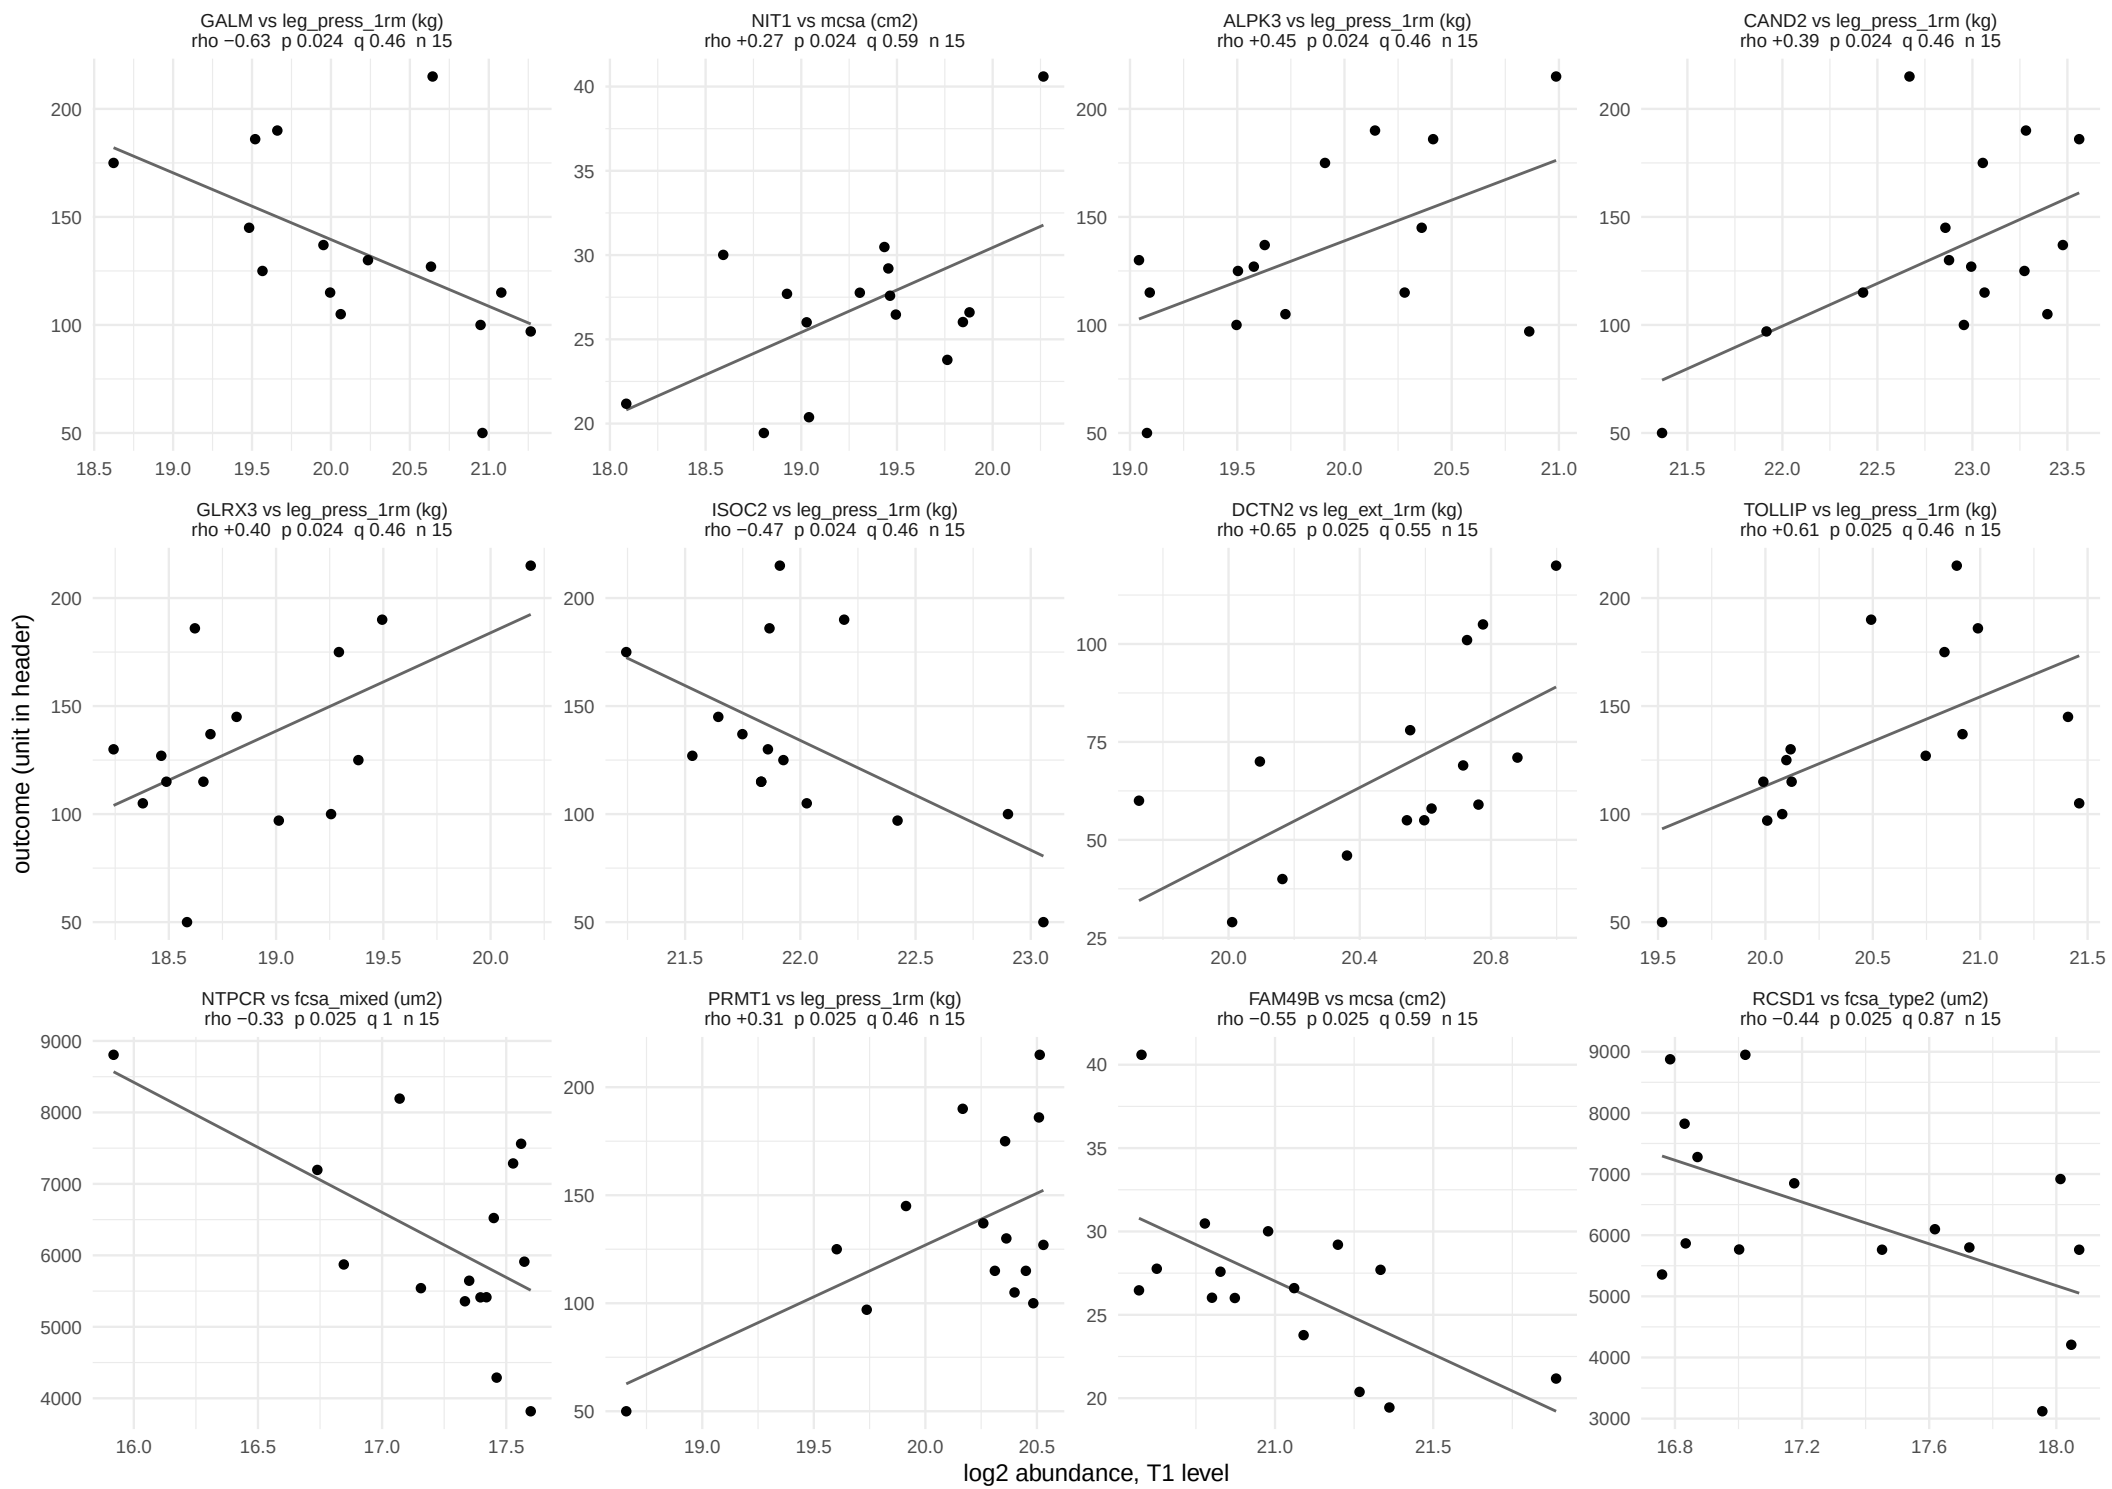

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline_level window


704 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 32 of 59.

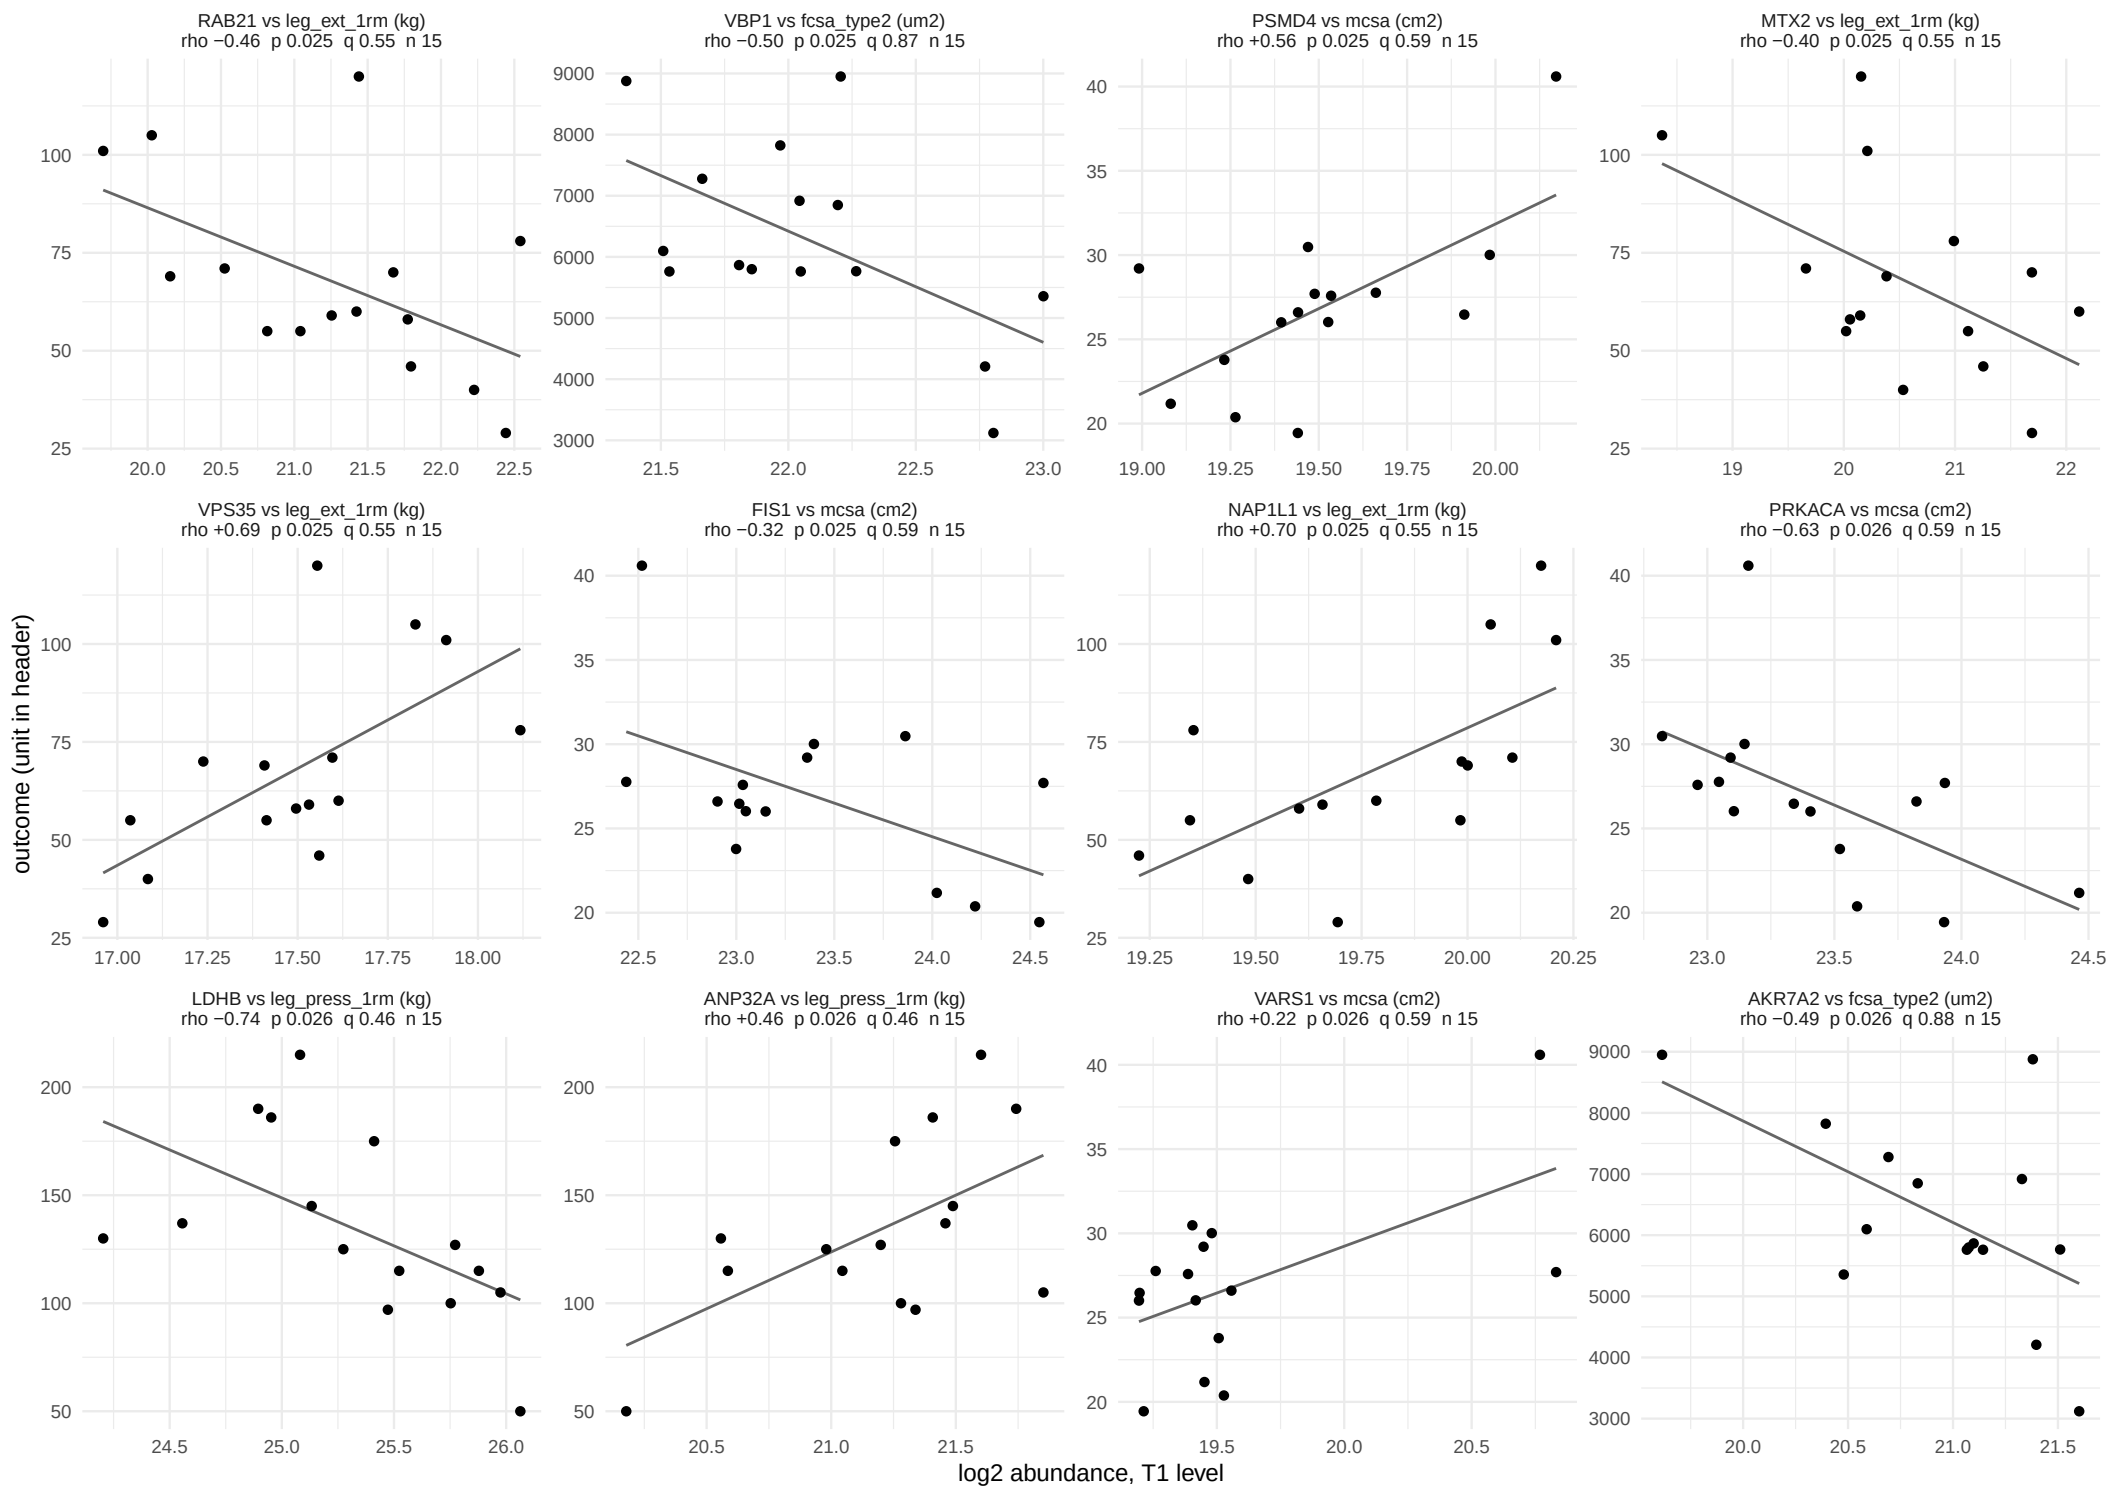

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline_level window


704 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 33 of 59.

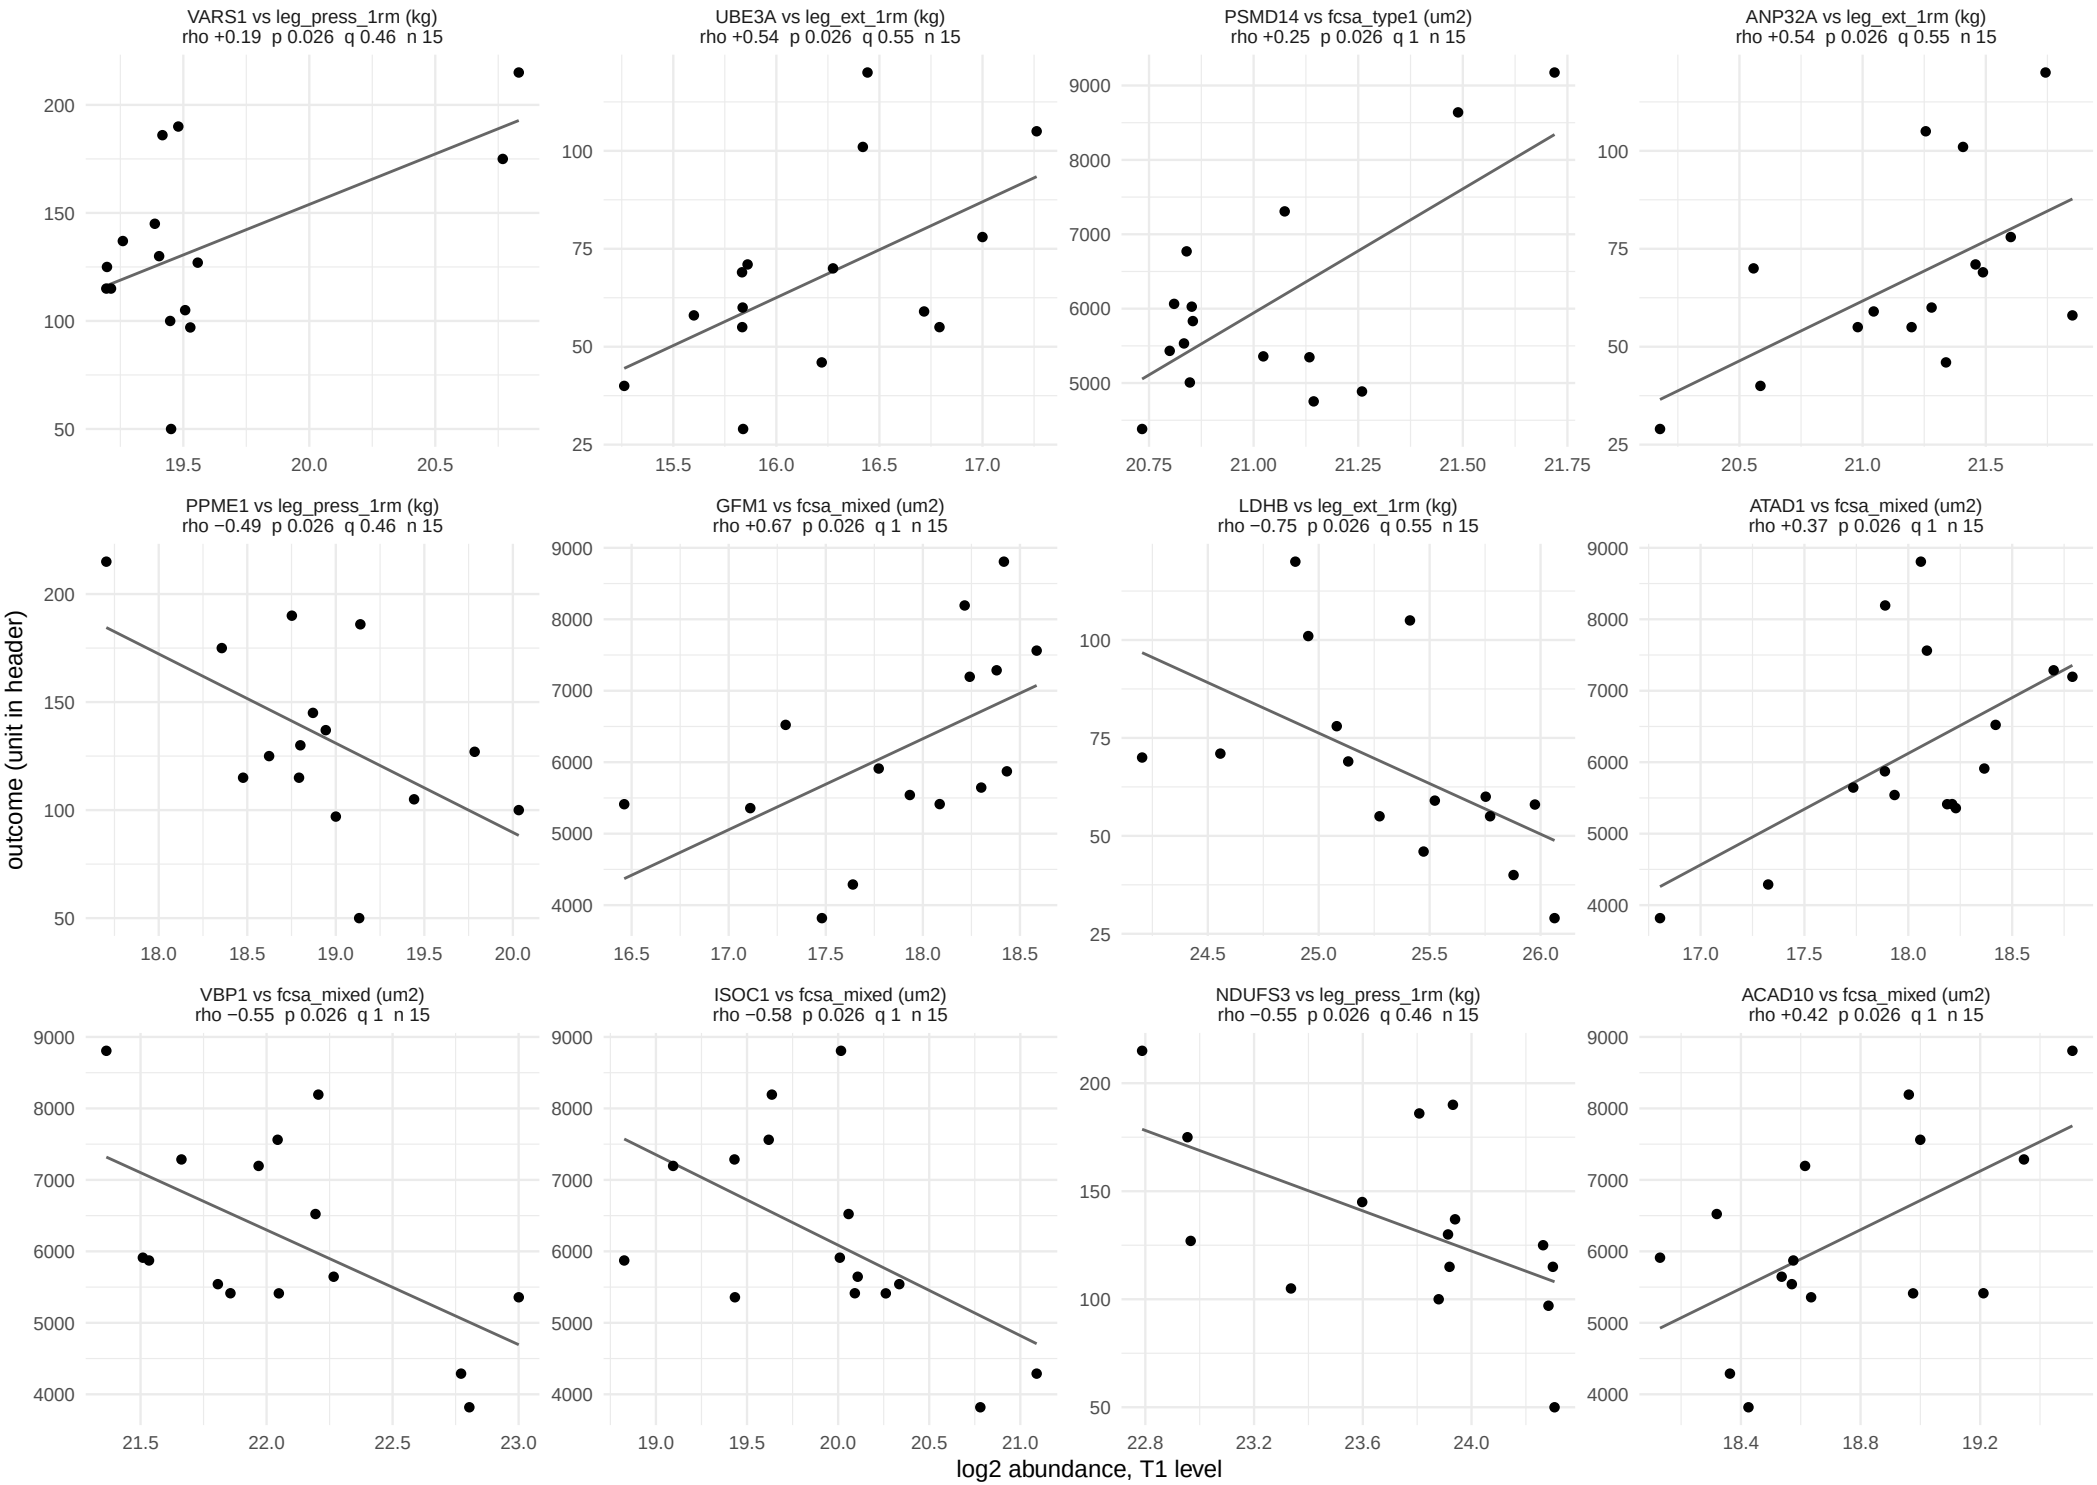

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline_level window


704 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 34 of 59.

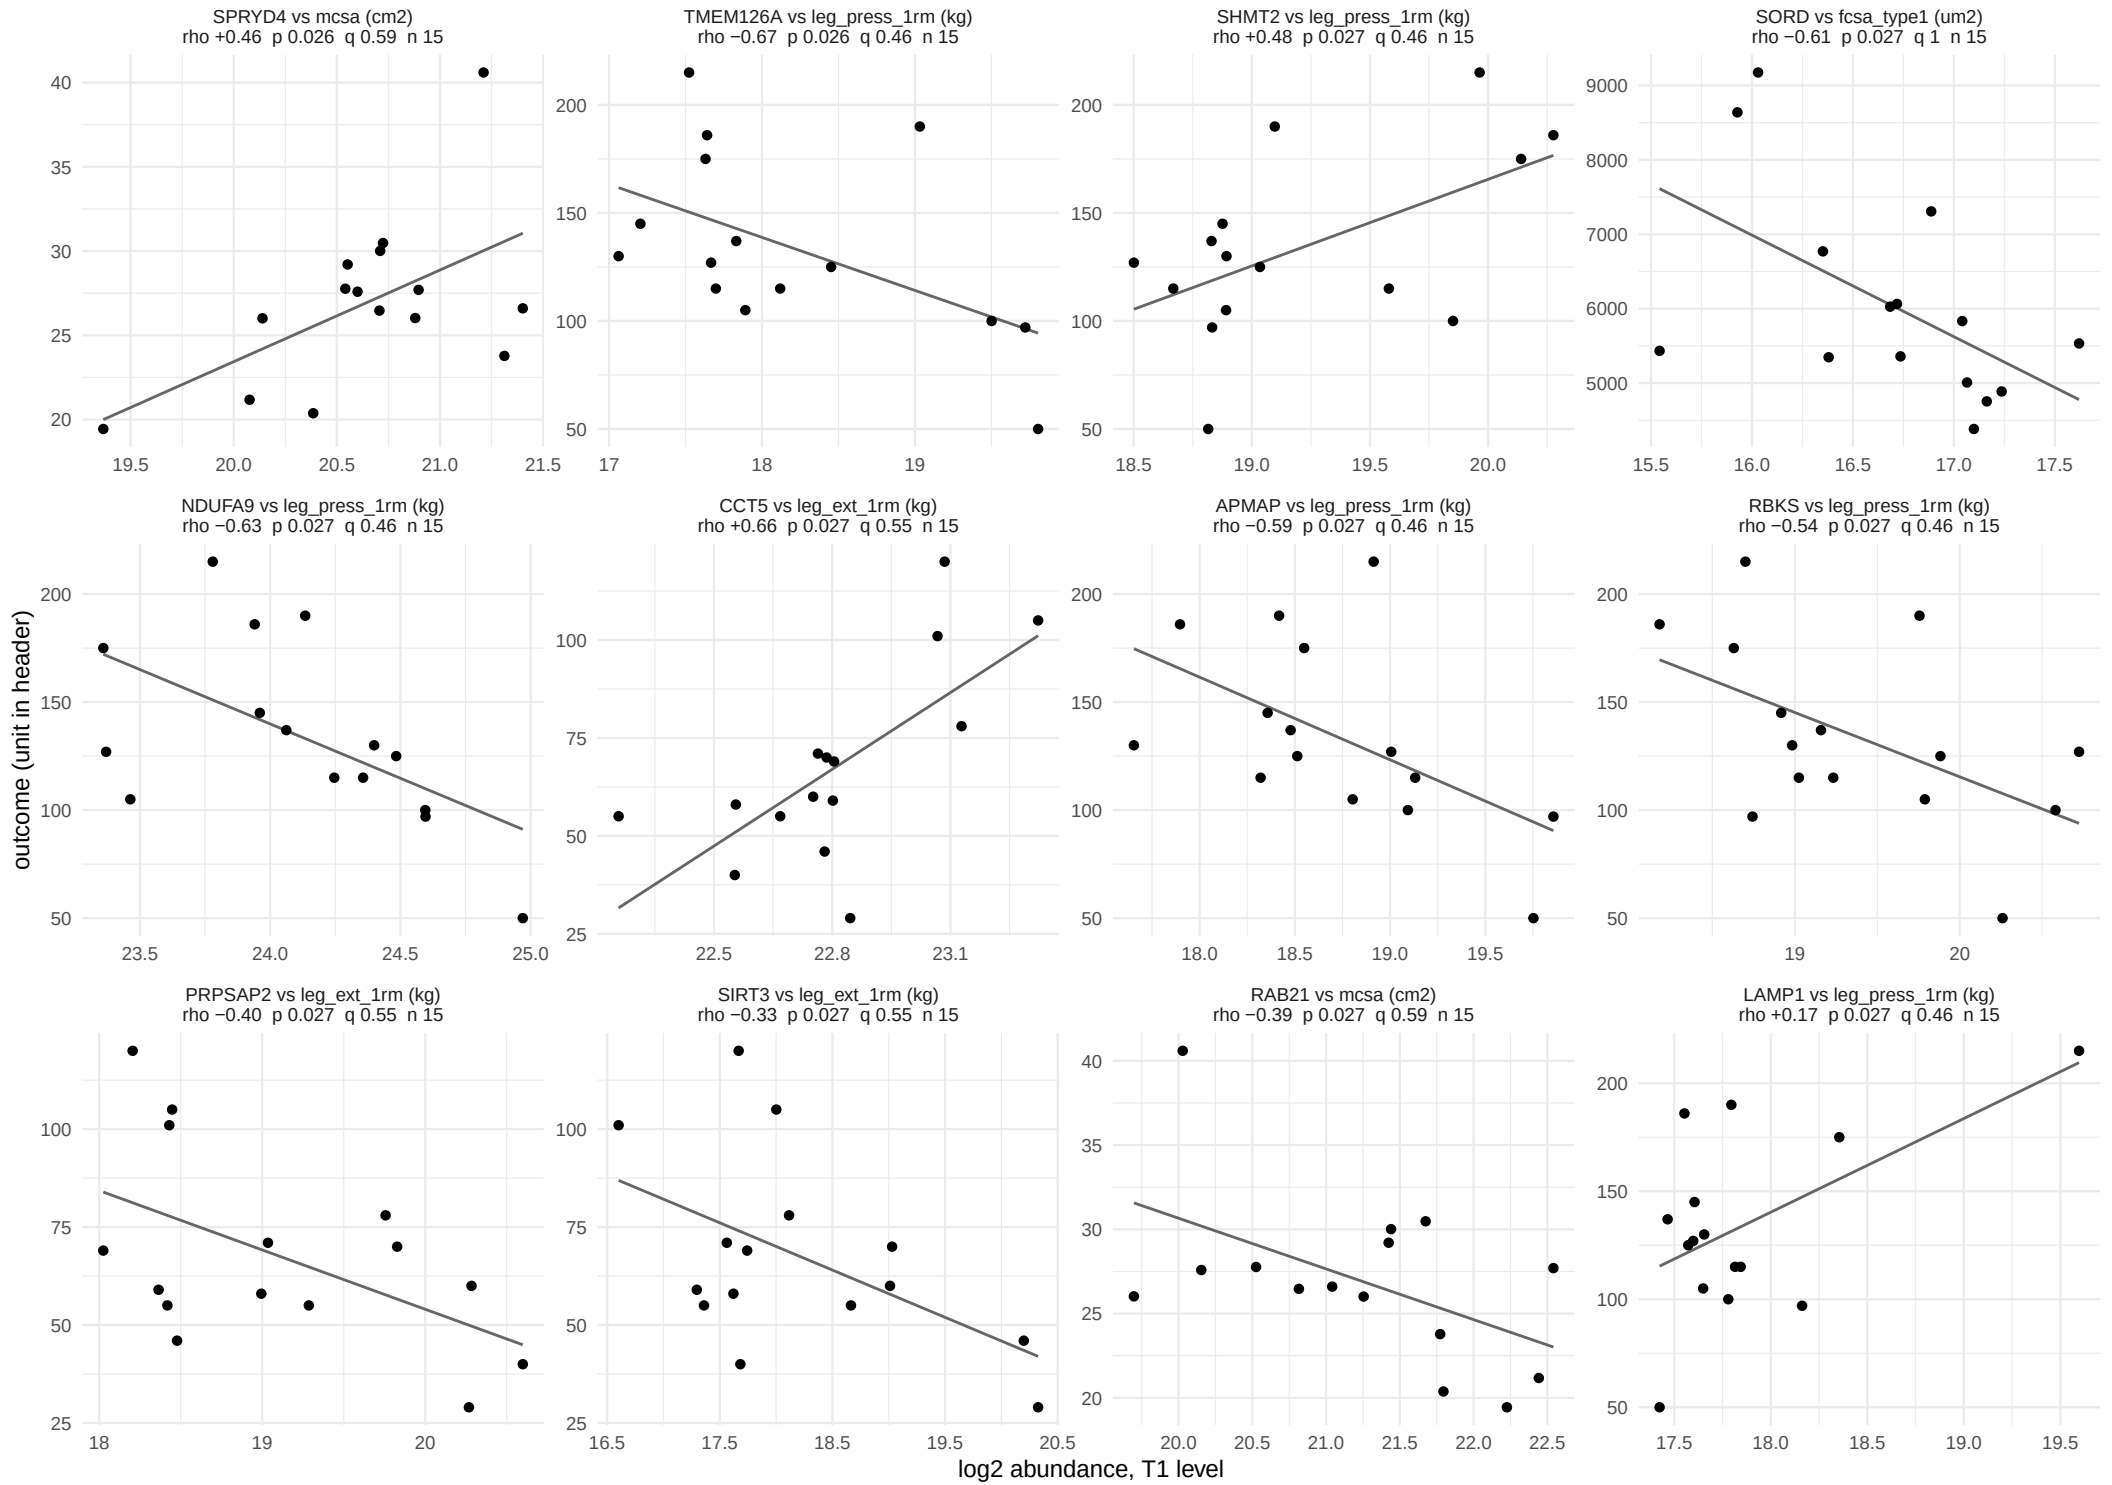

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline_level window


704 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 35 of 59.

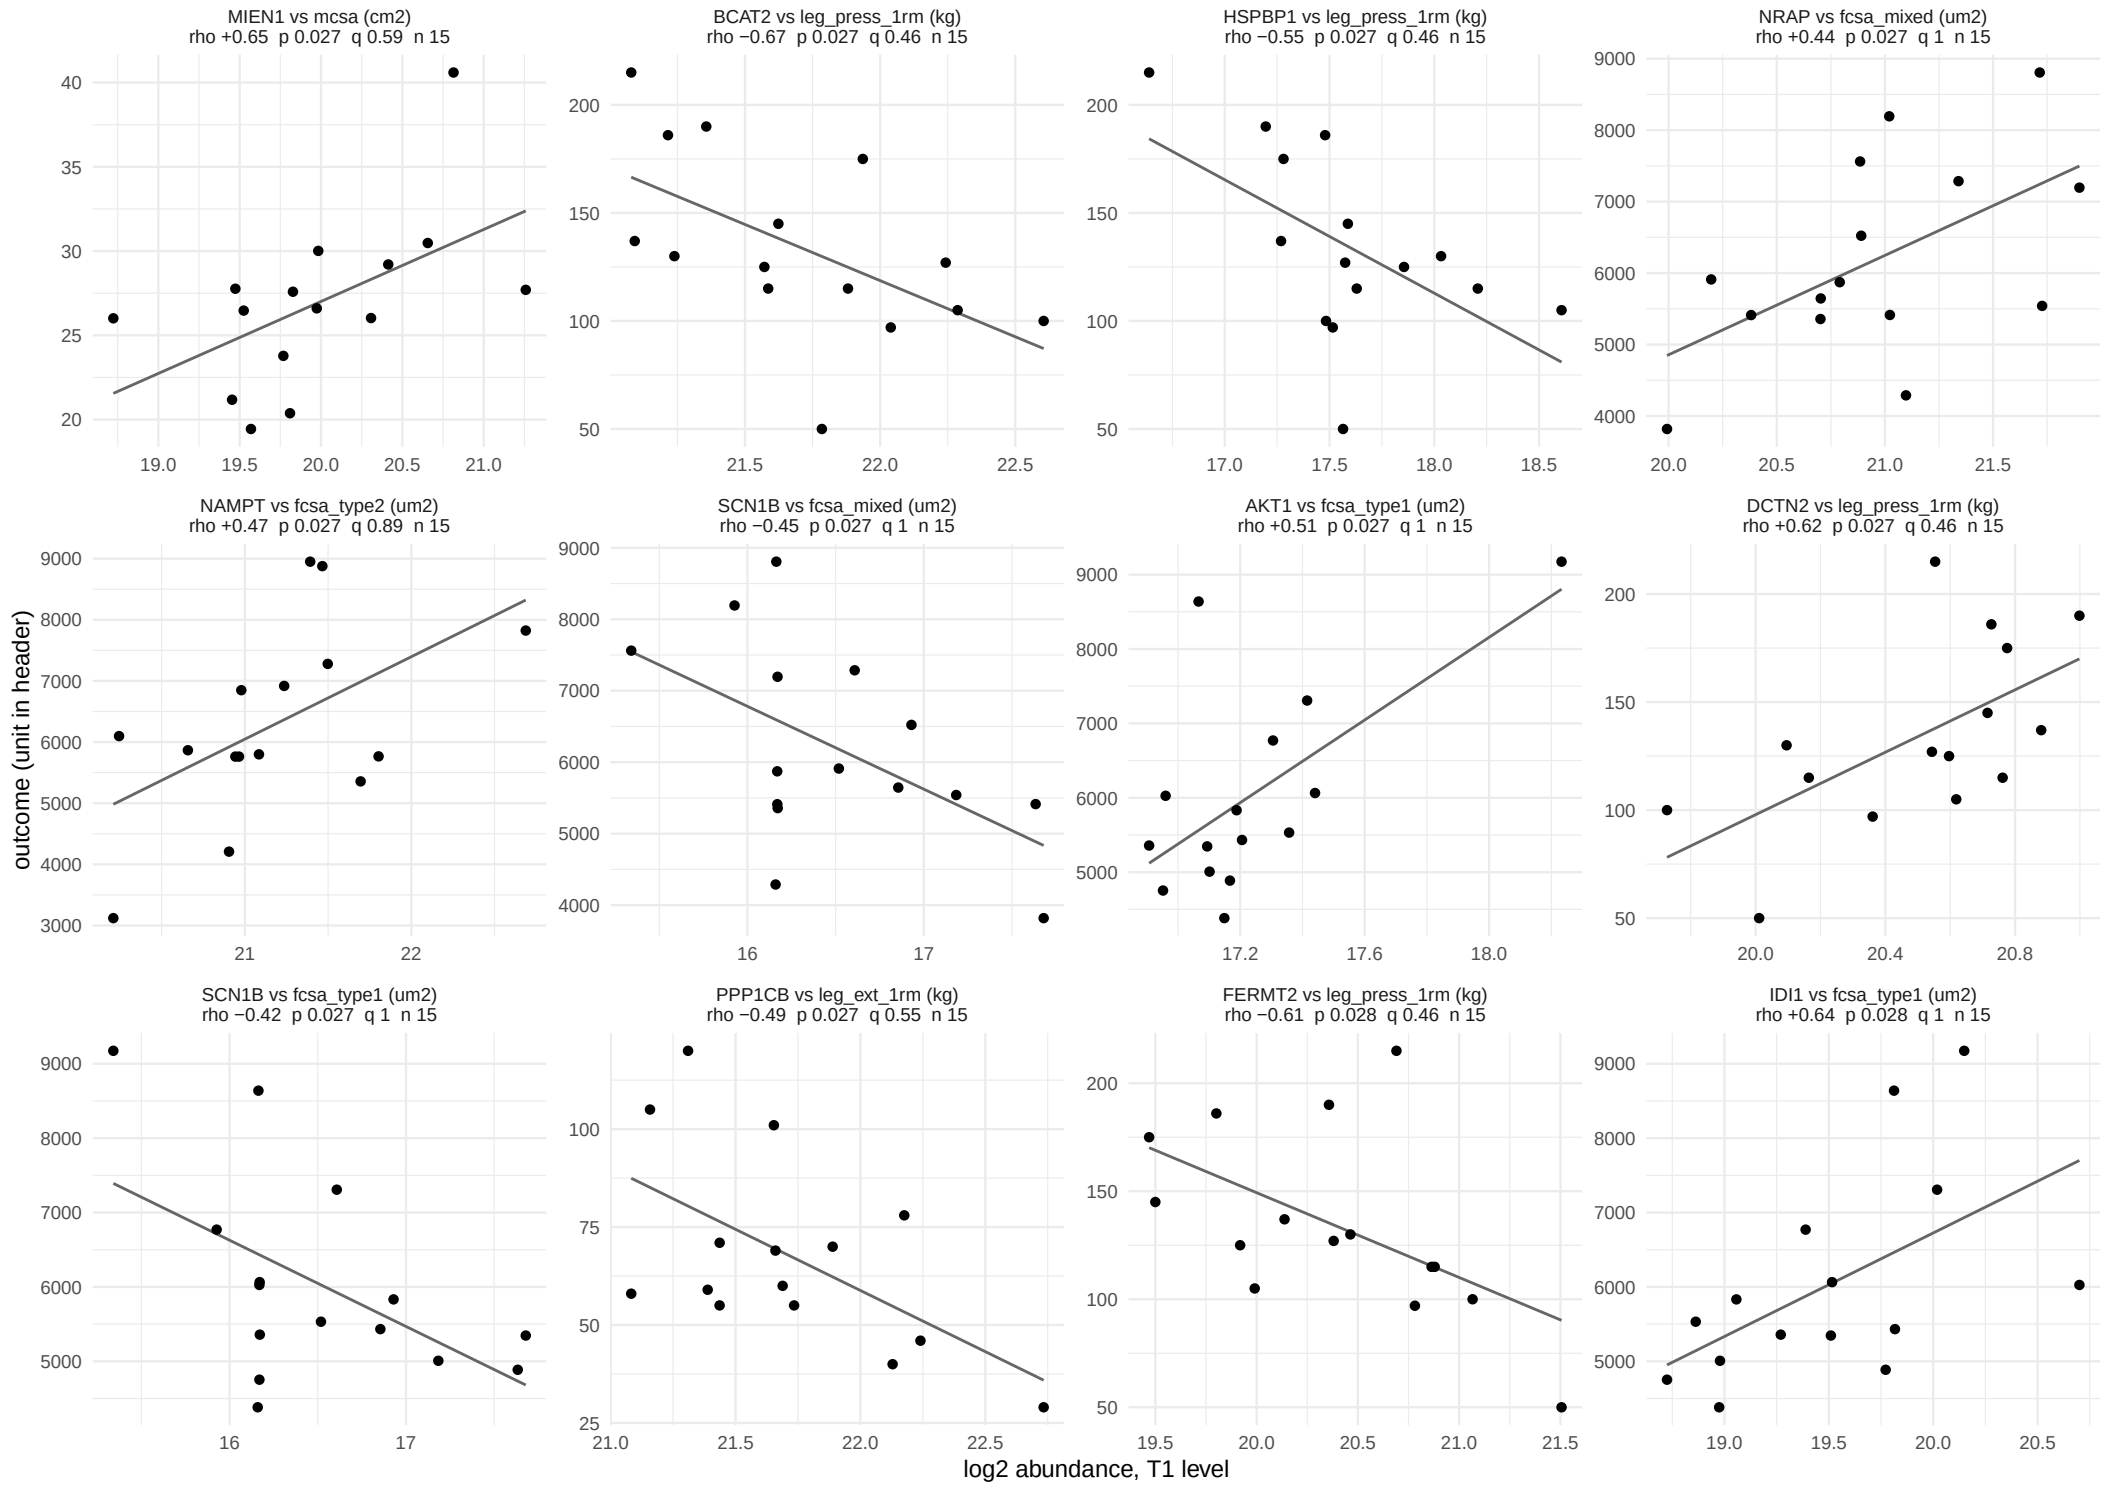

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline_level window


704 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 36 of 59.

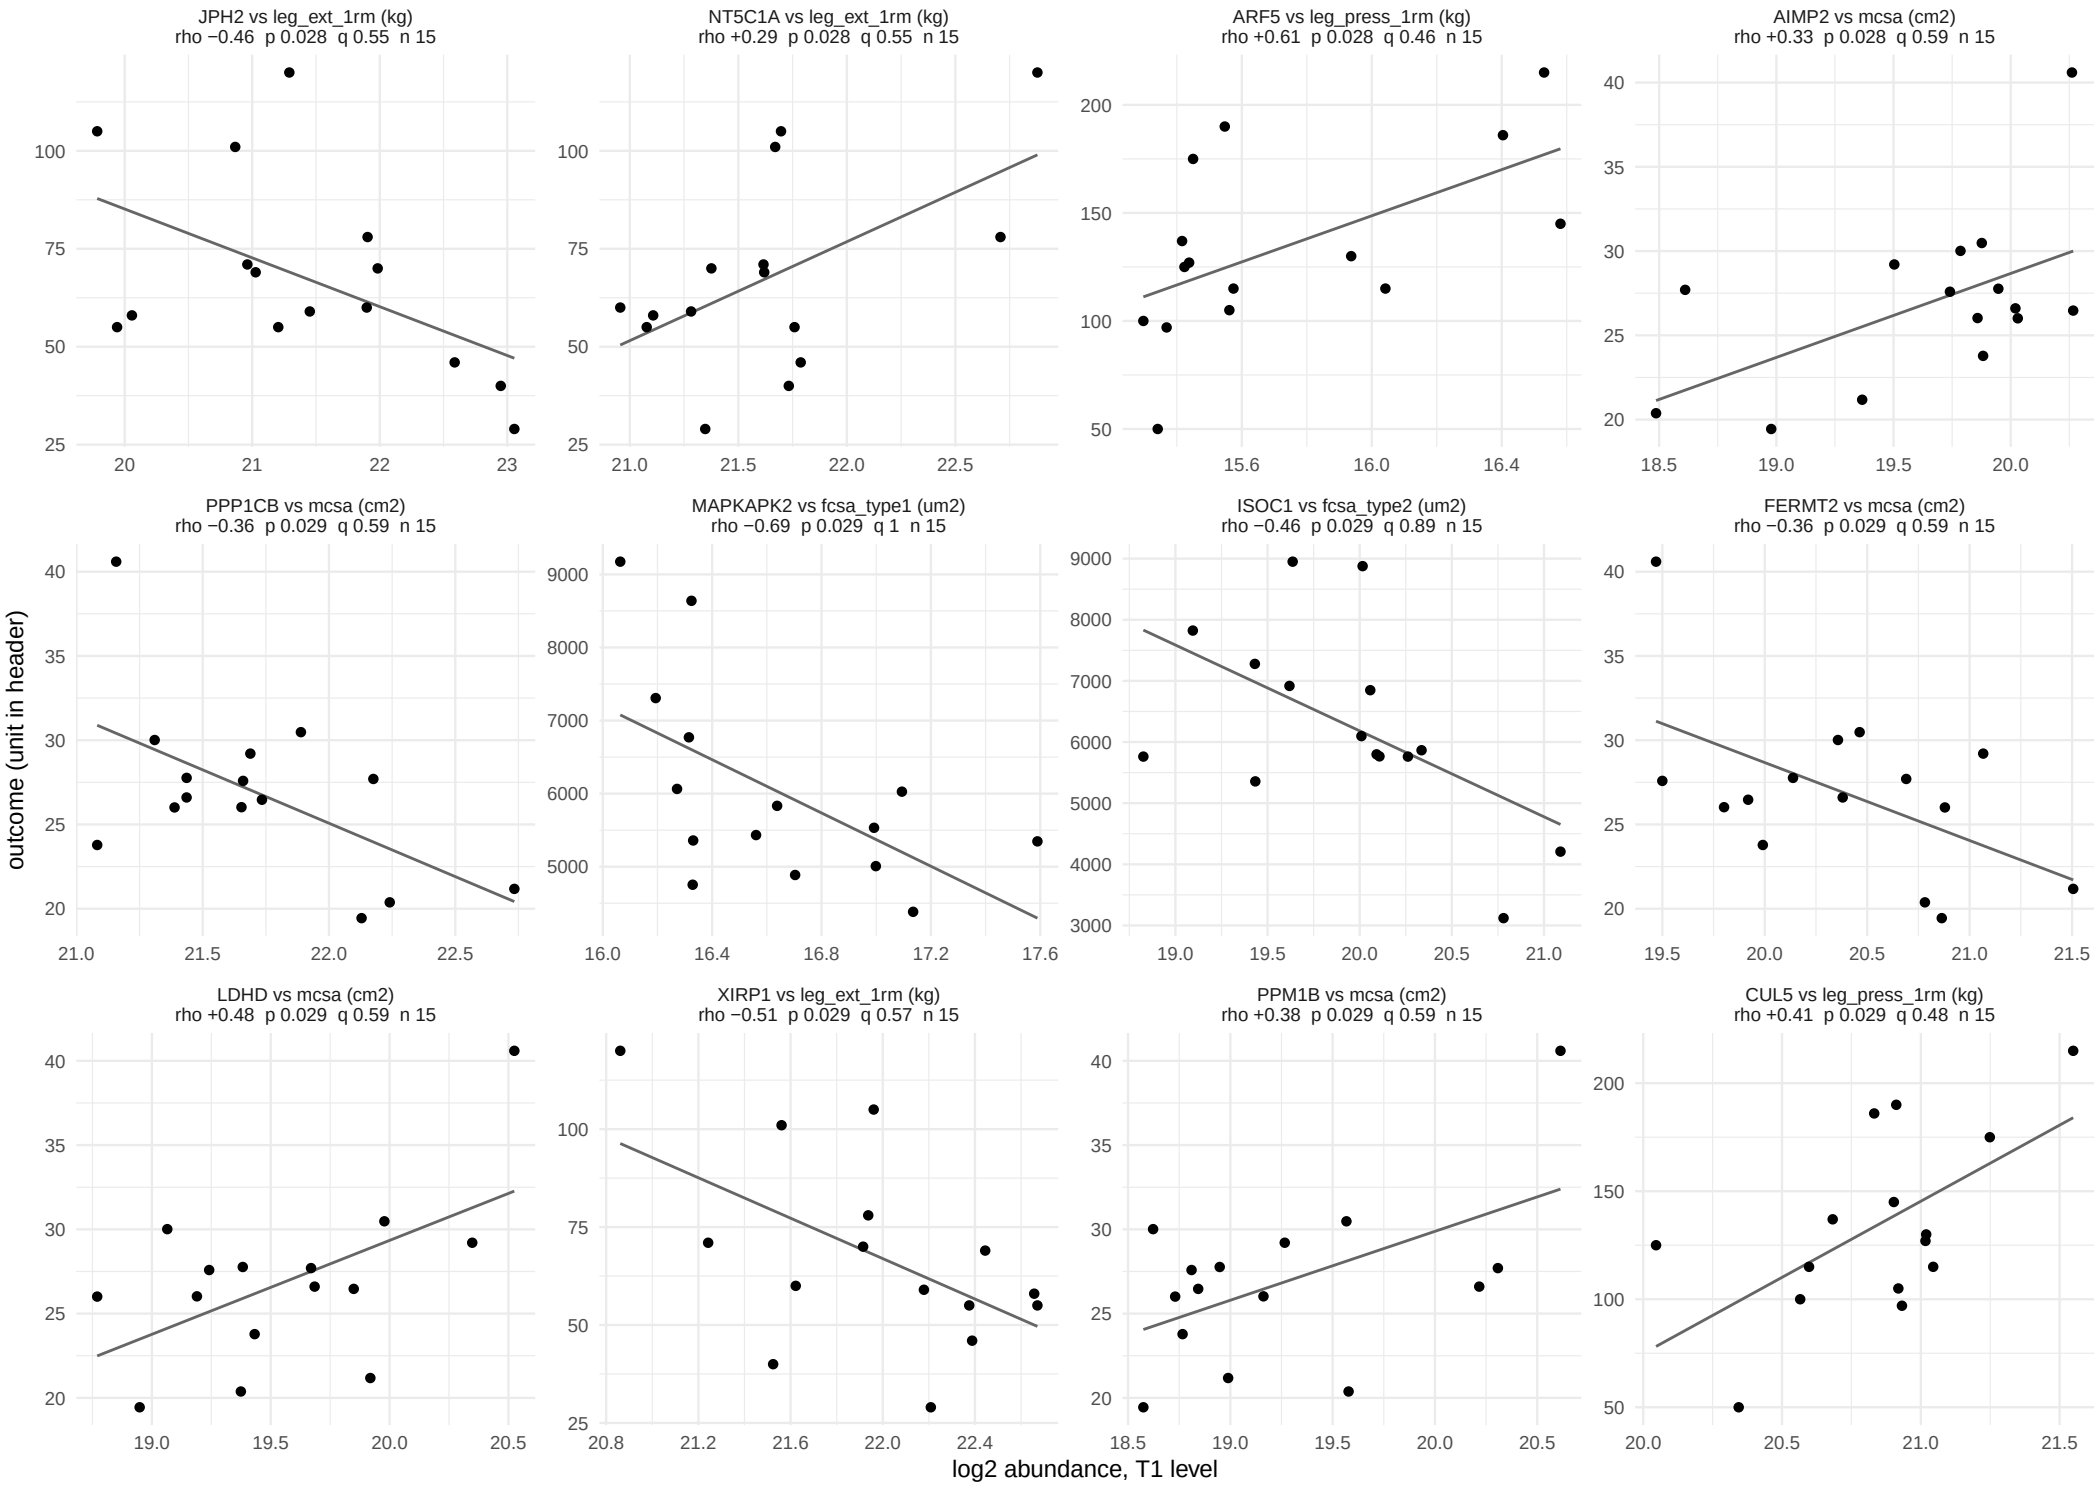

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline_level window


704 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 37 of 59.

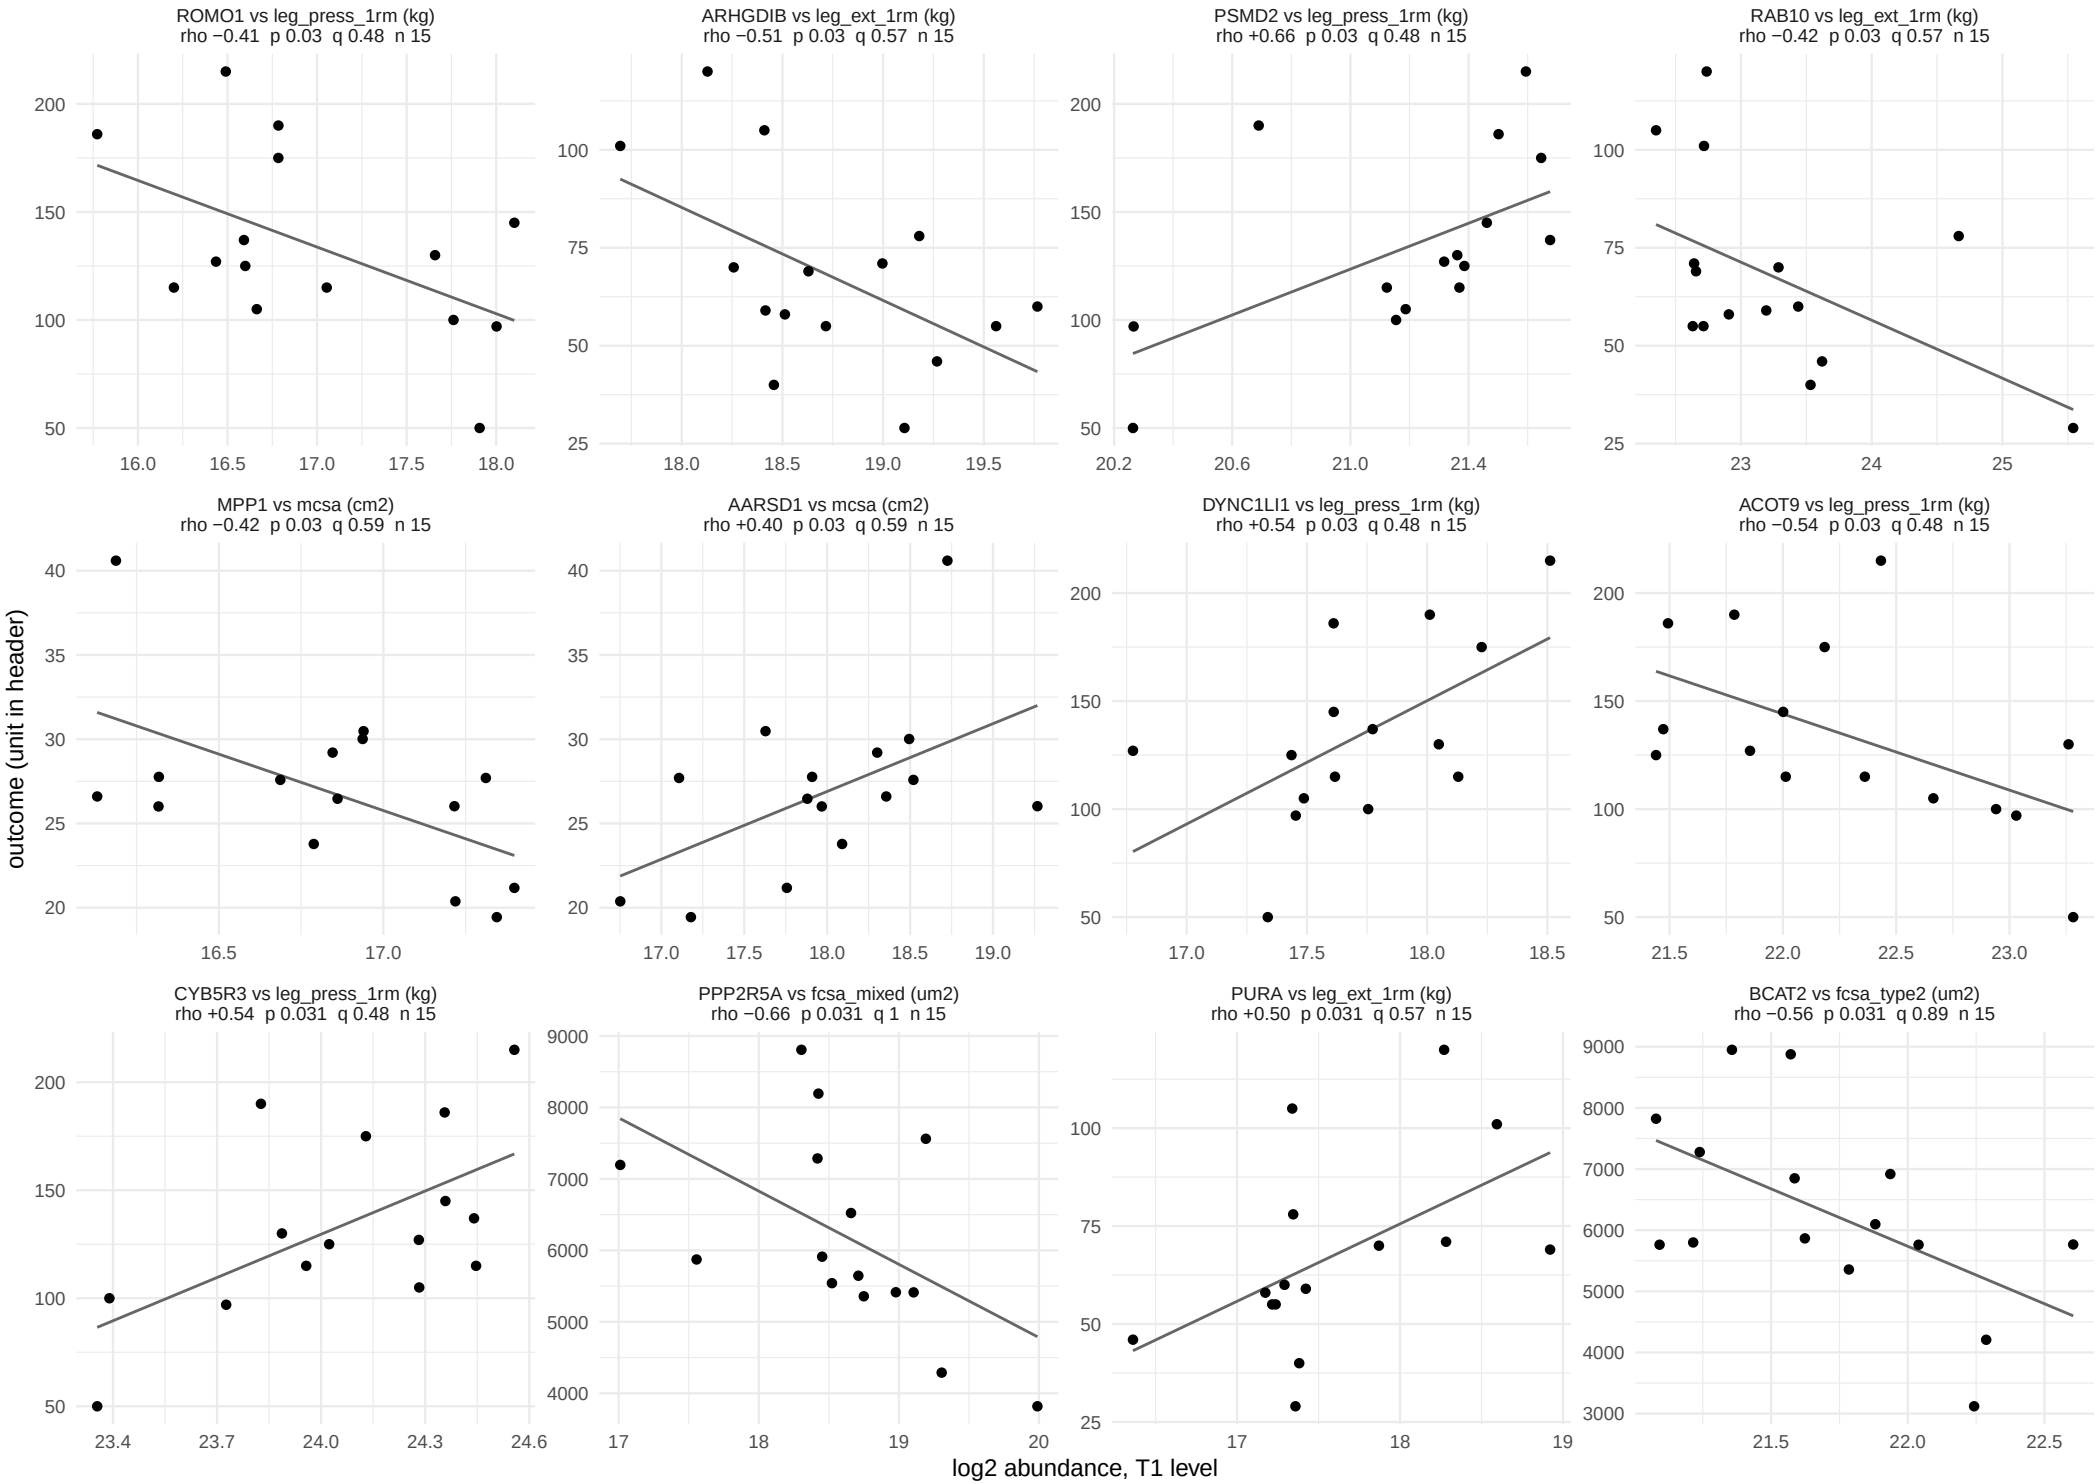

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline_level window


704 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 38 of 59.

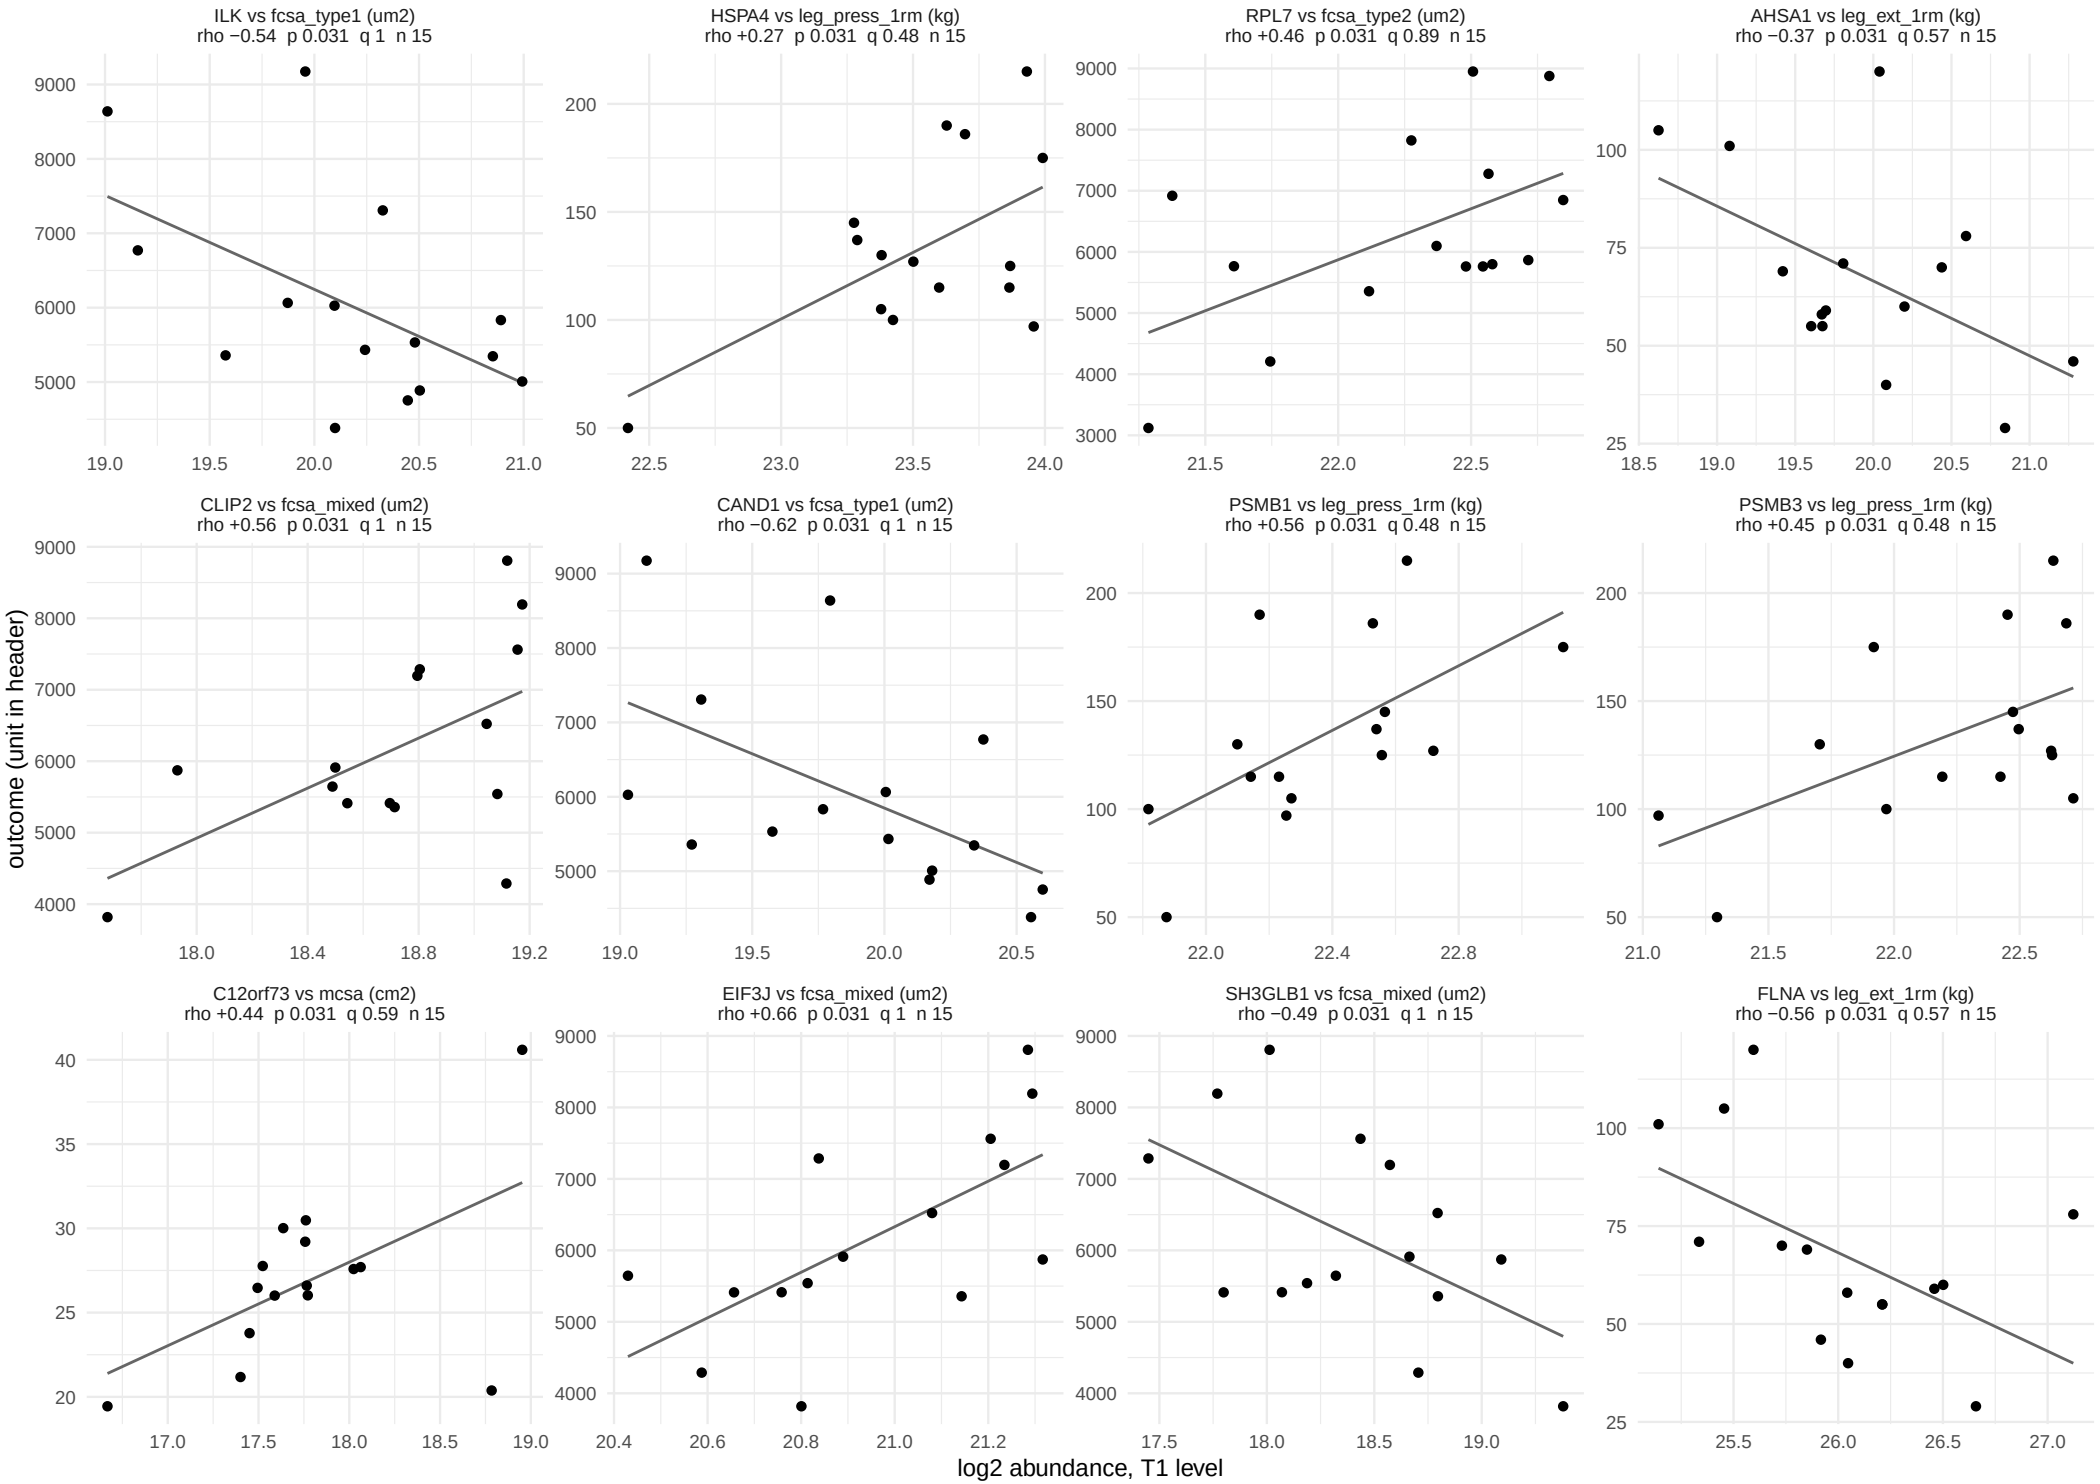

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline_level window


704 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 39 of 59.

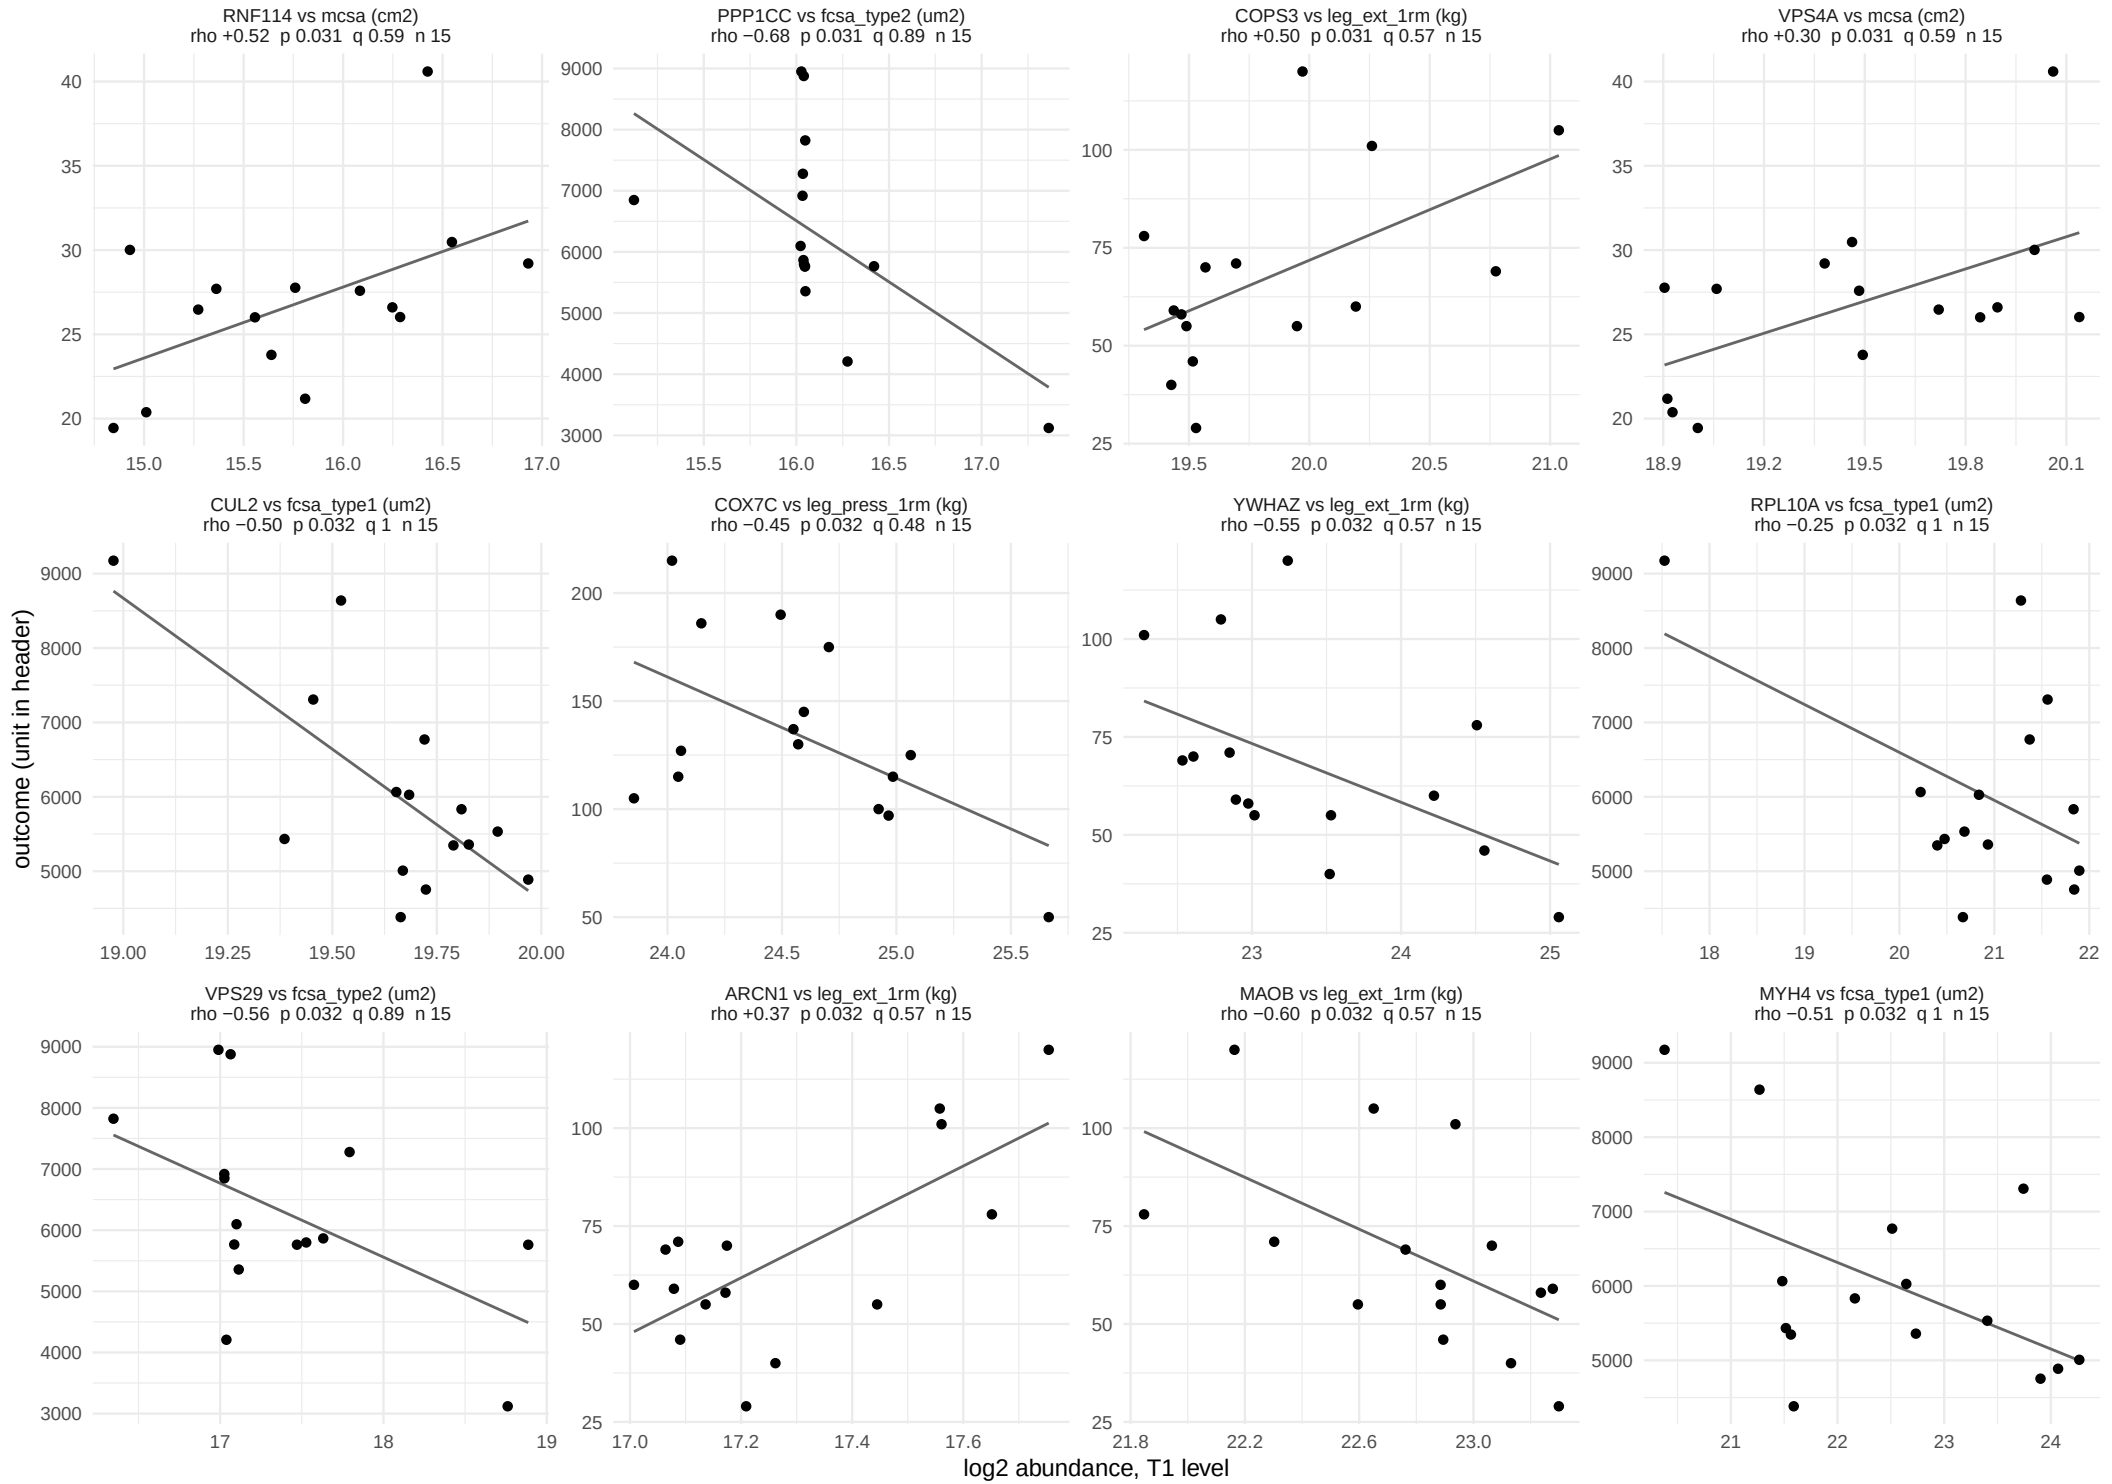

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline_level window


704 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 40 of 59.

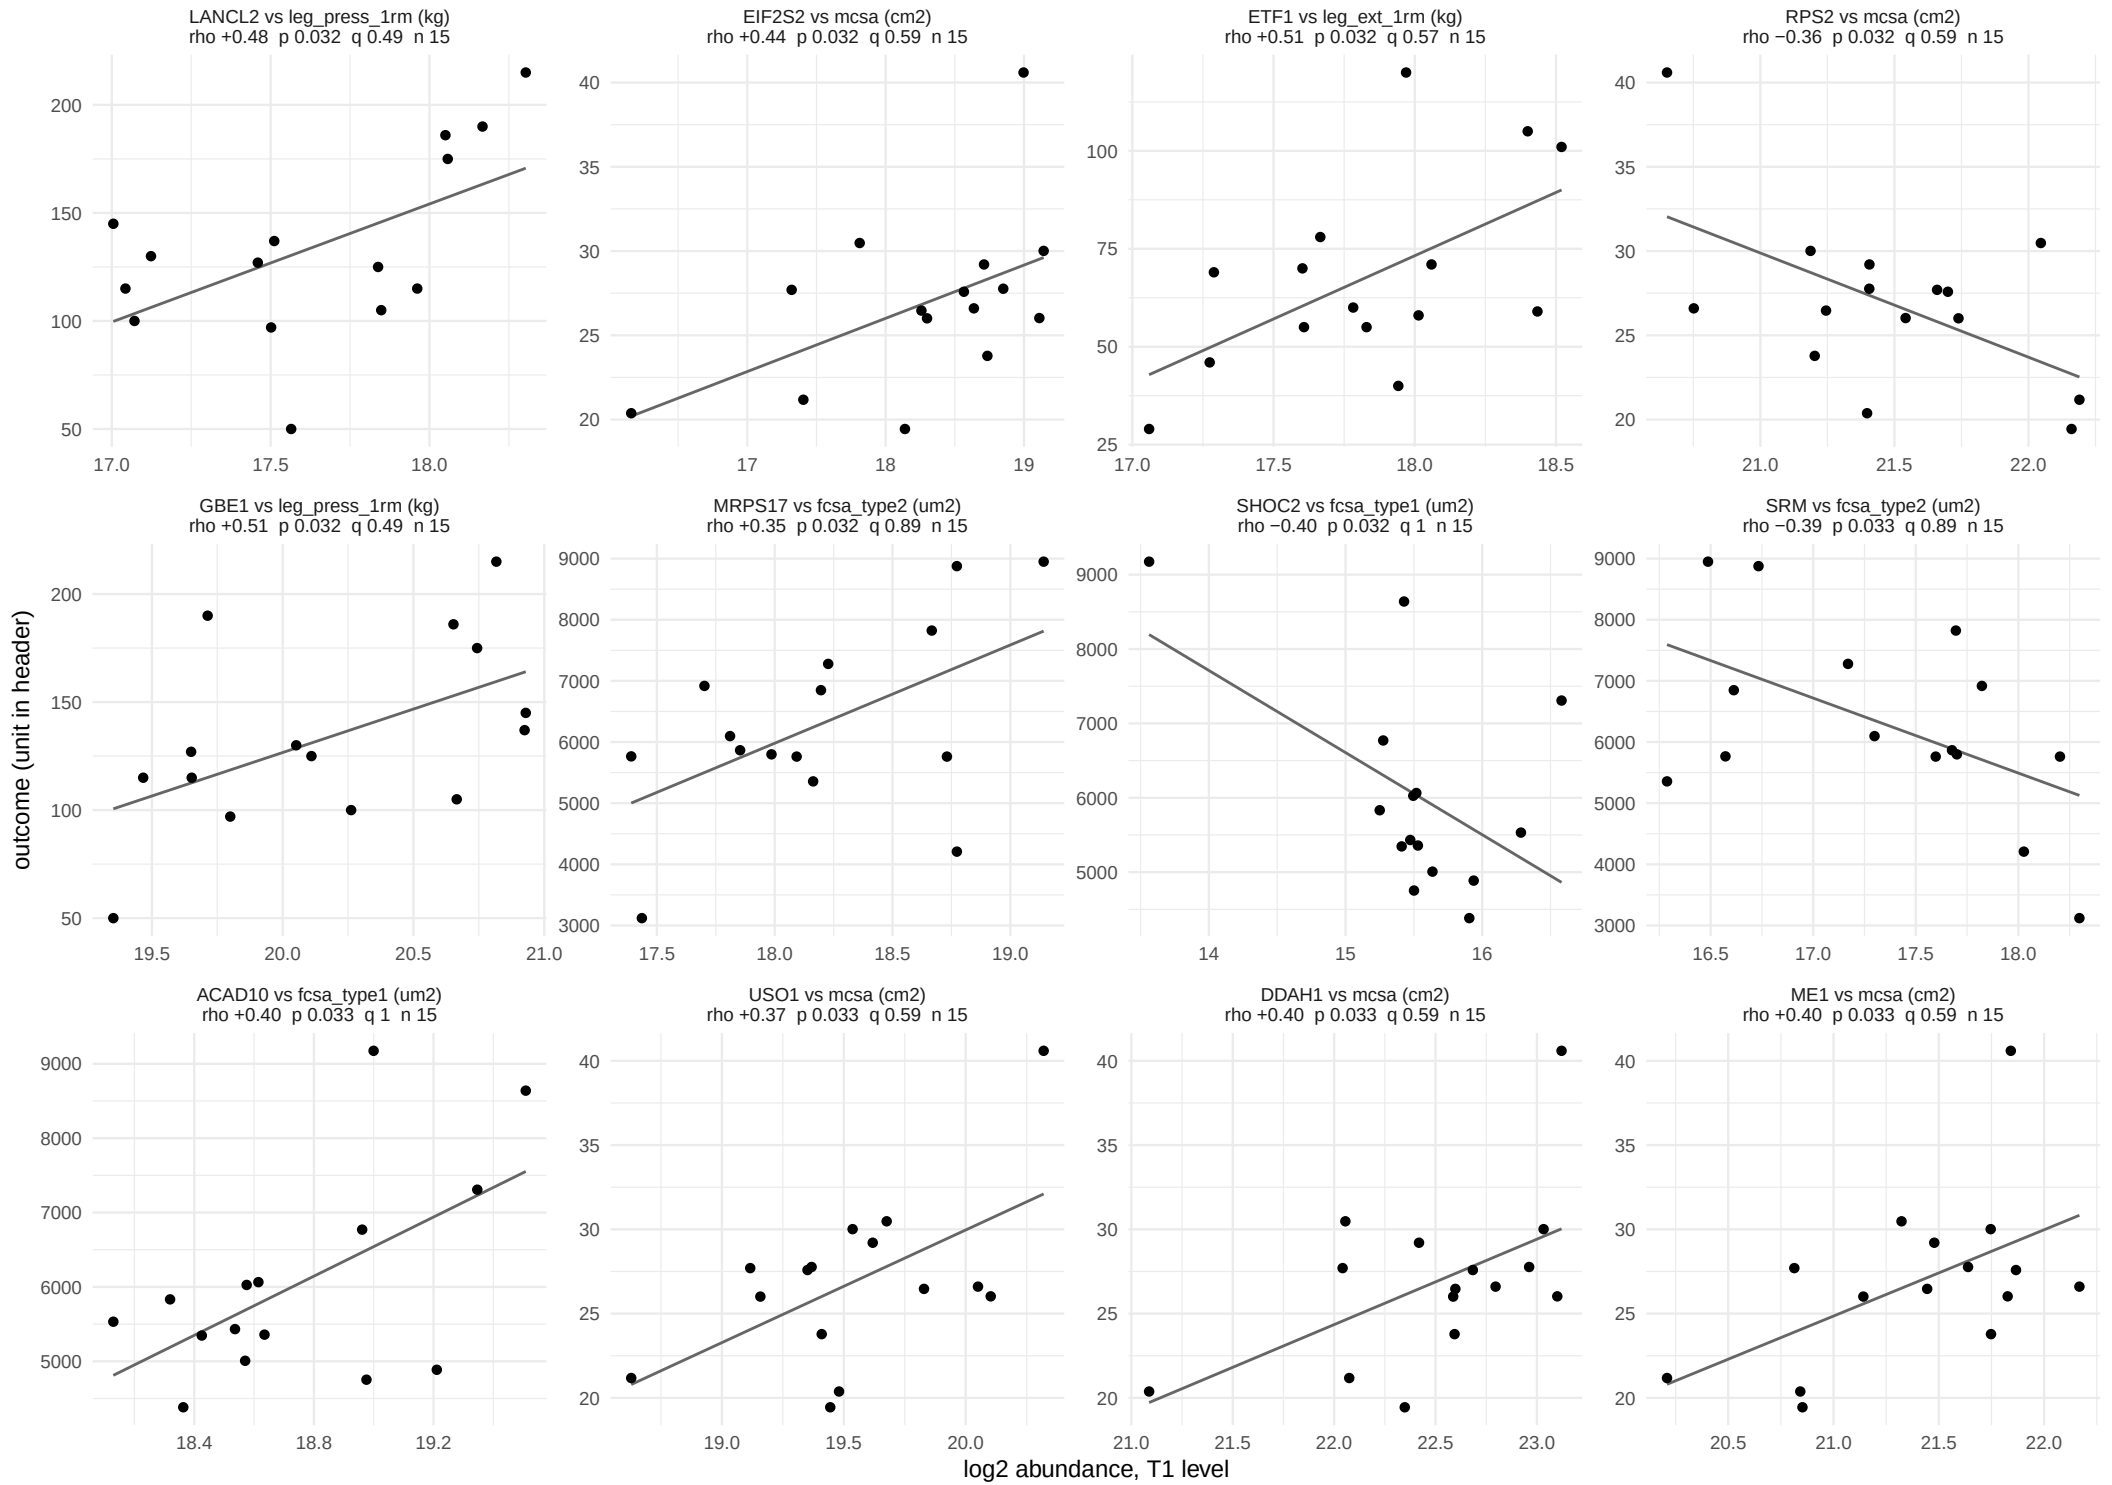

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline_level window


704 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 41 of 59.

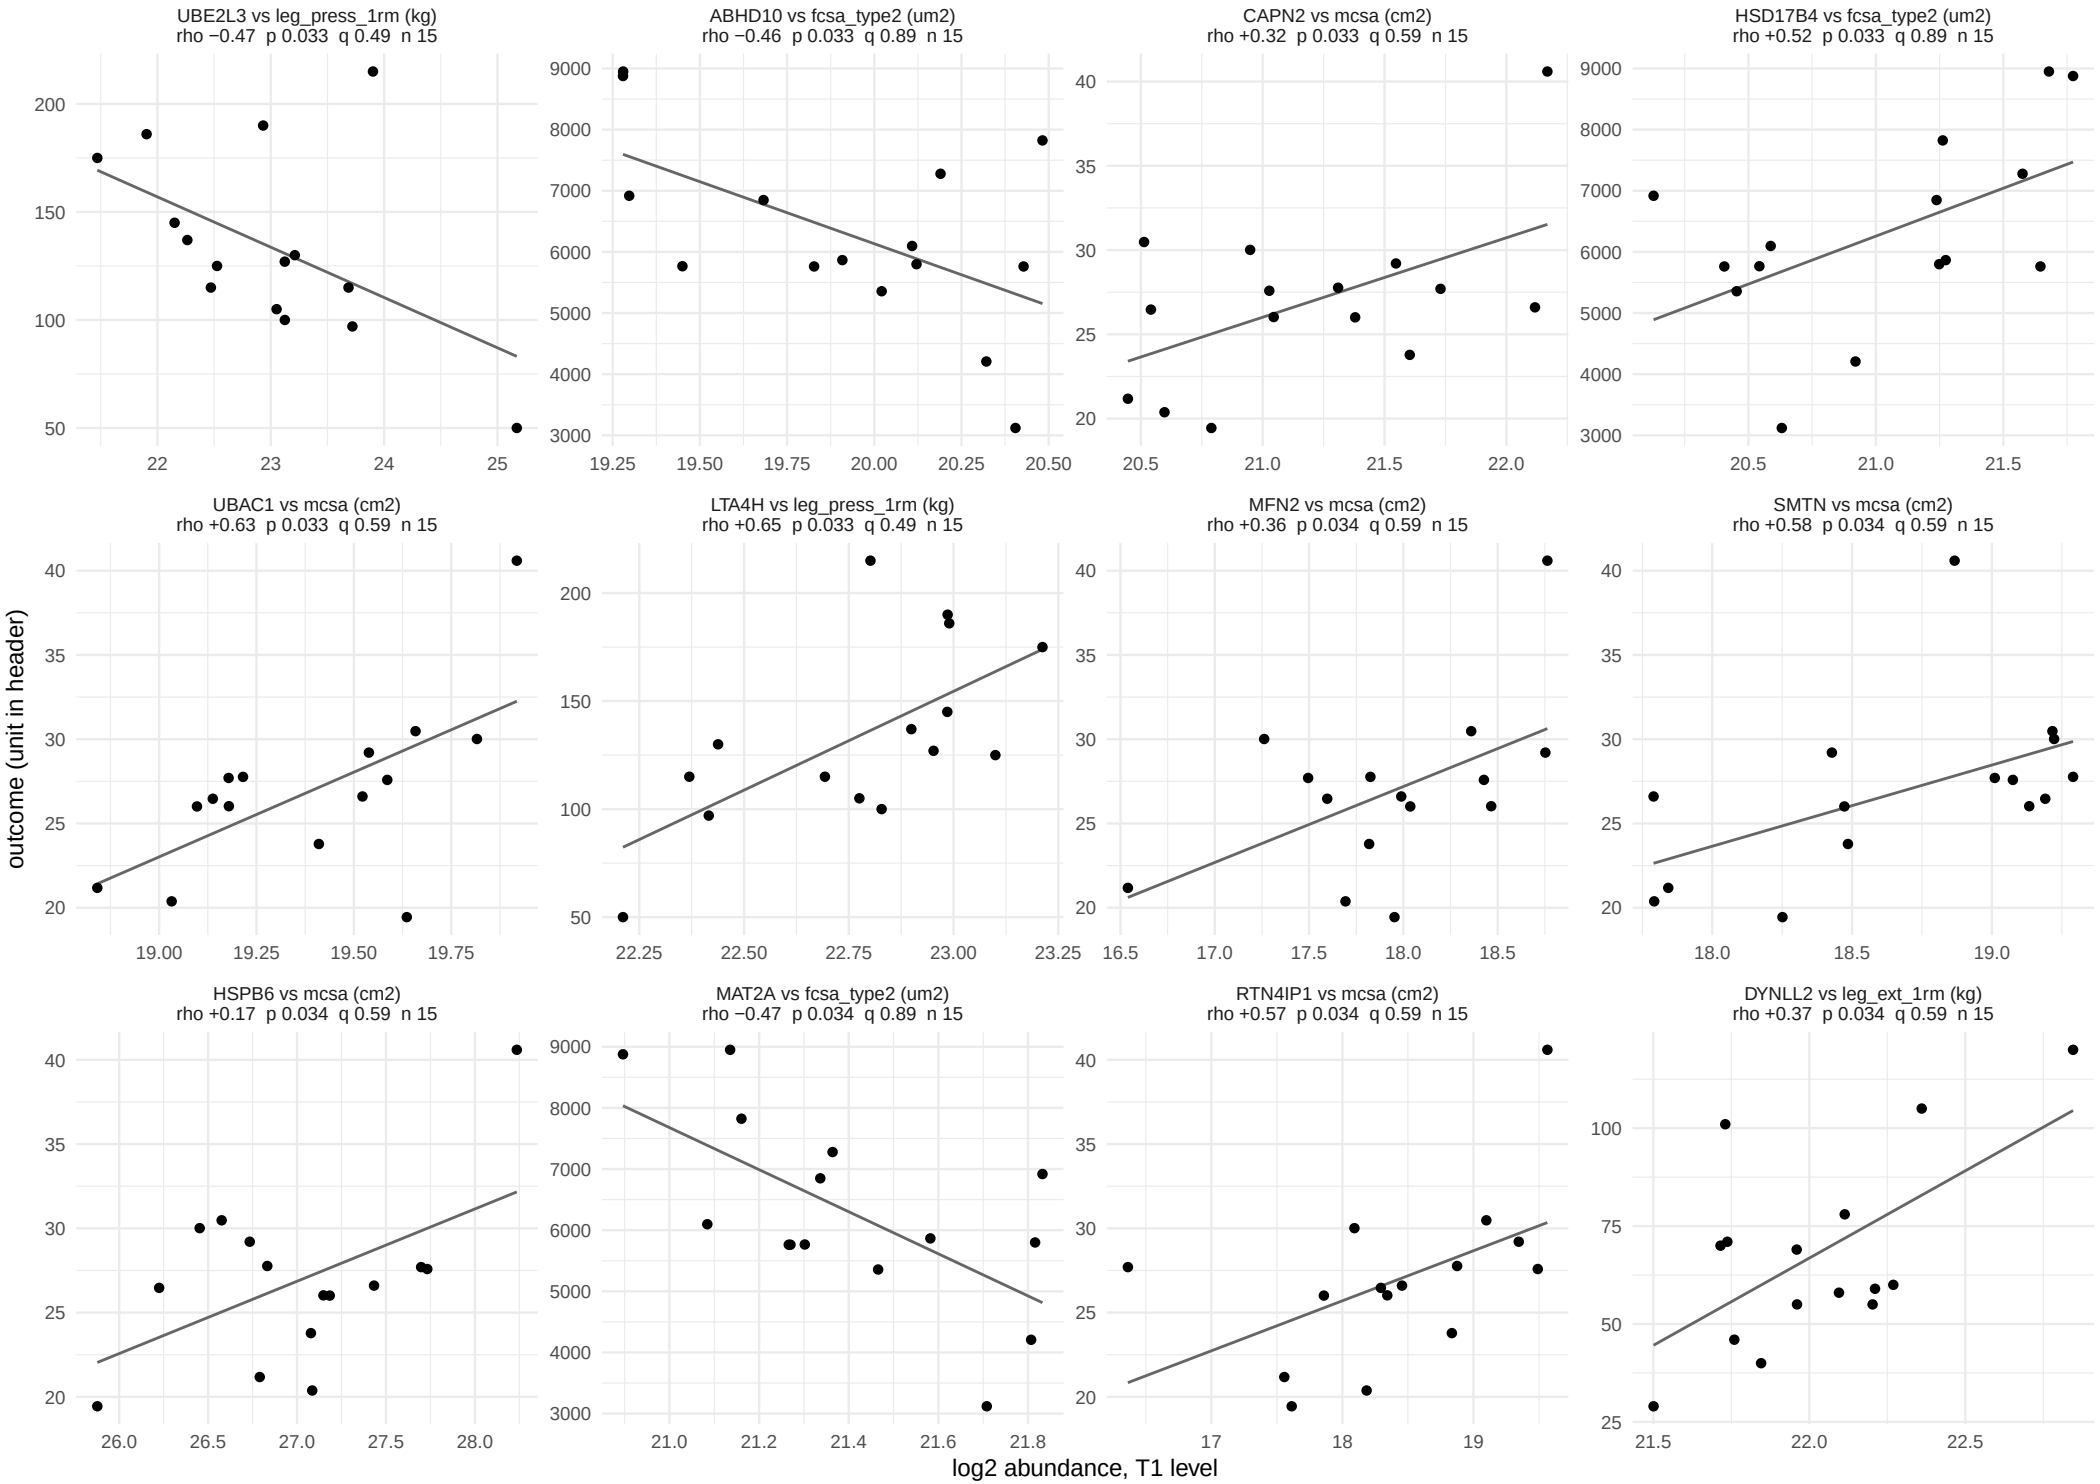

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline_level window


704 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 42 of 59.

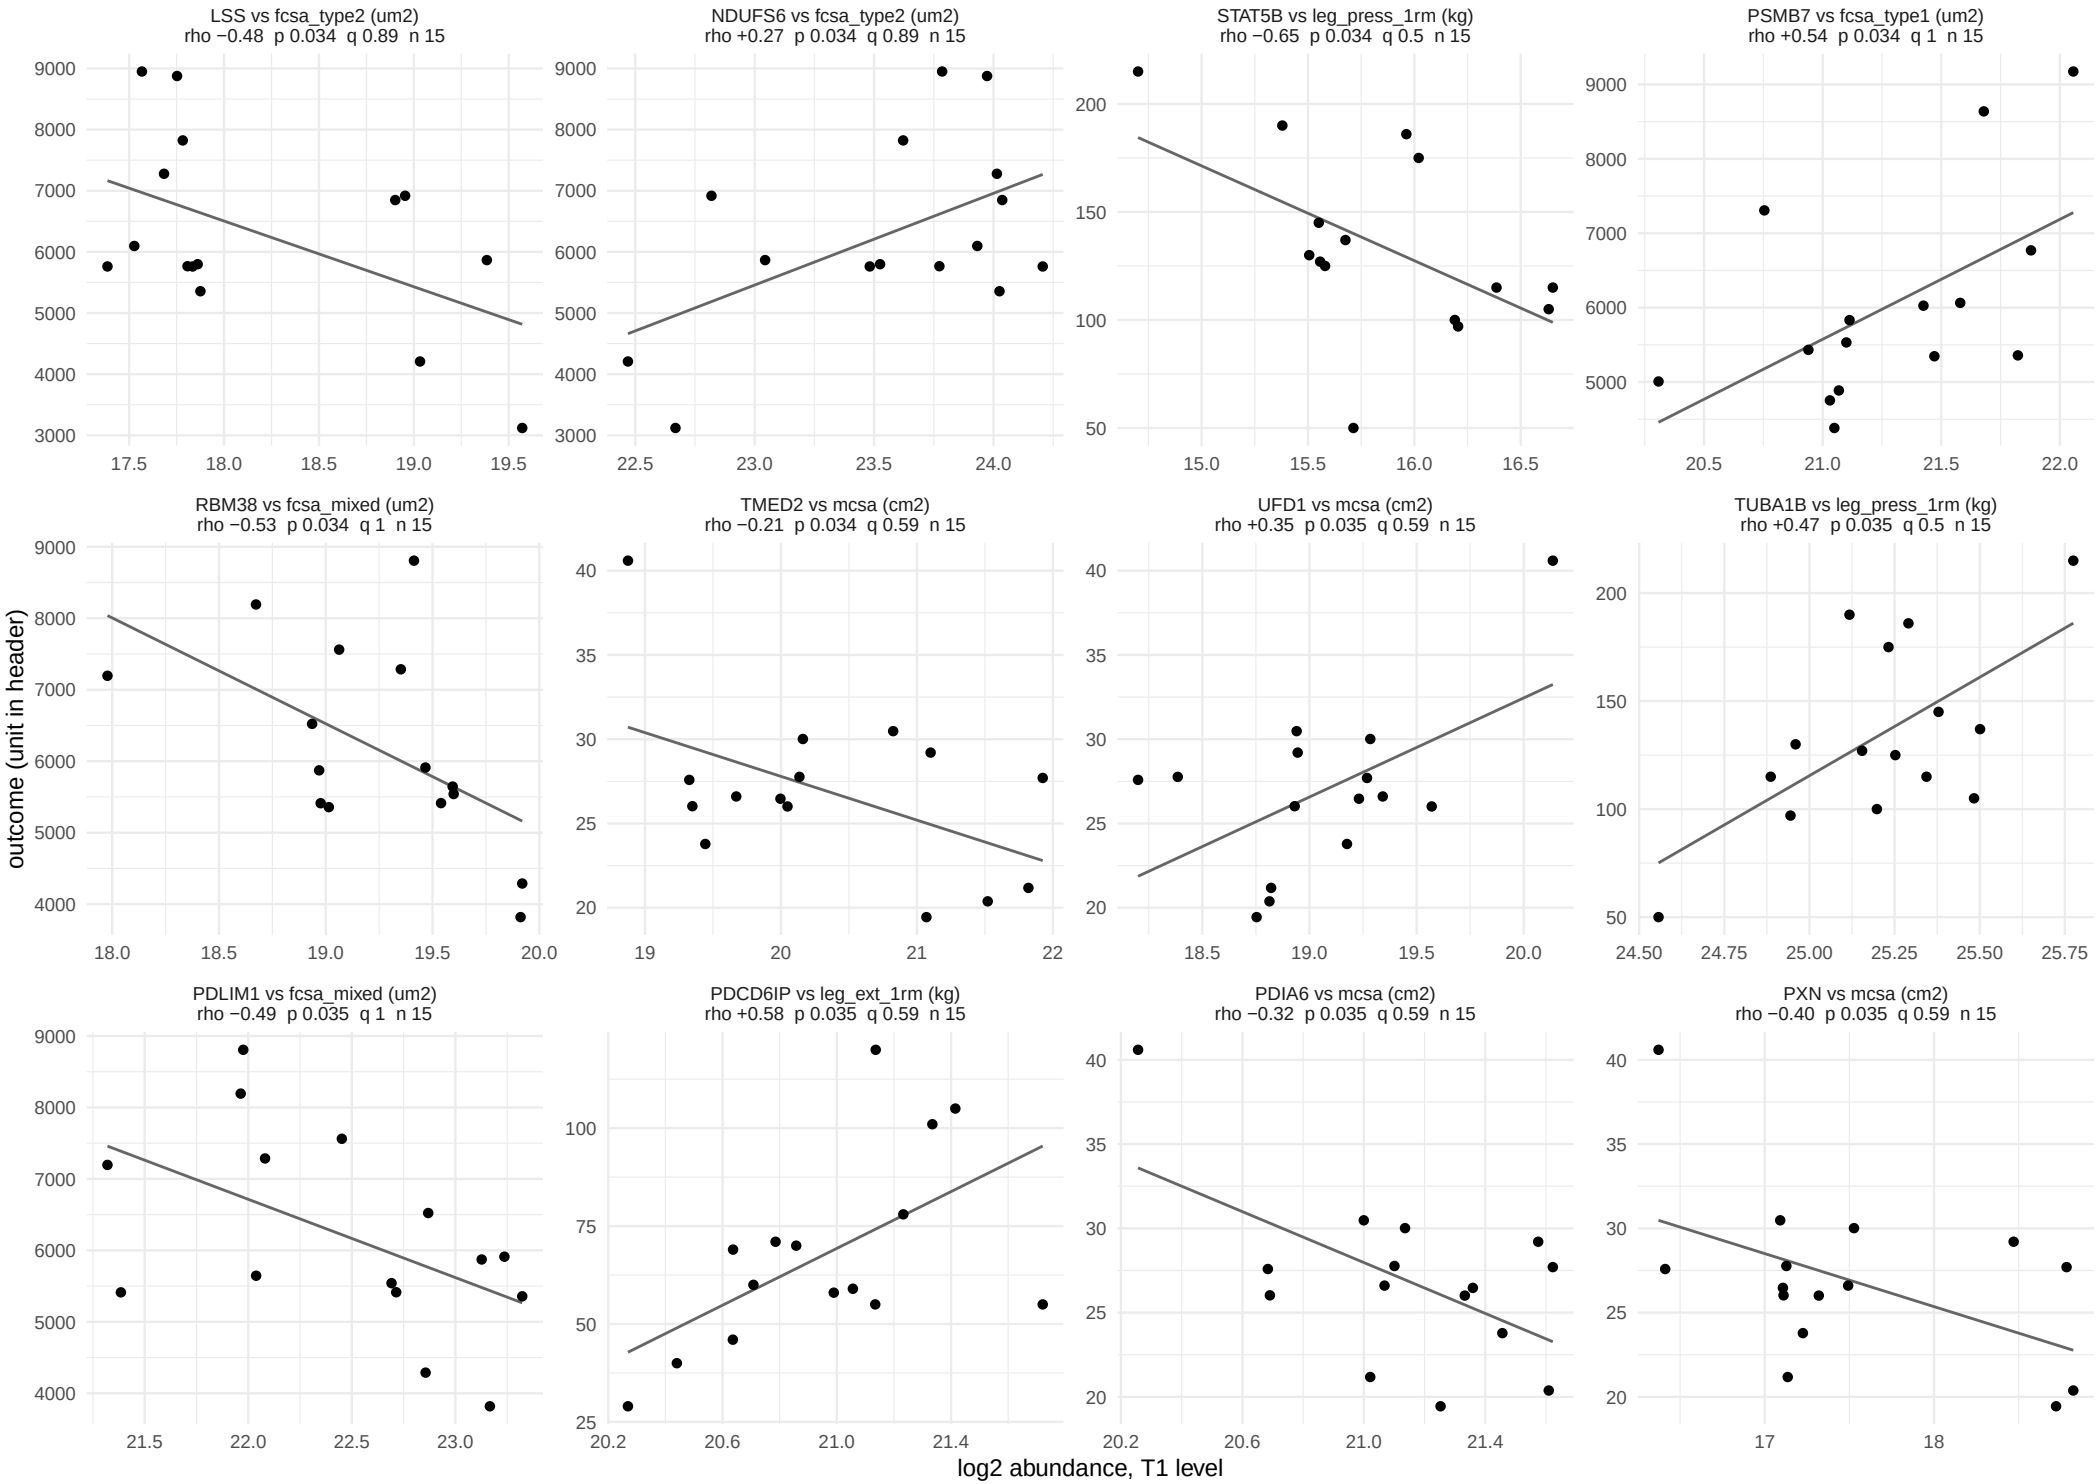

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline_level window


704 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 43 of 59.

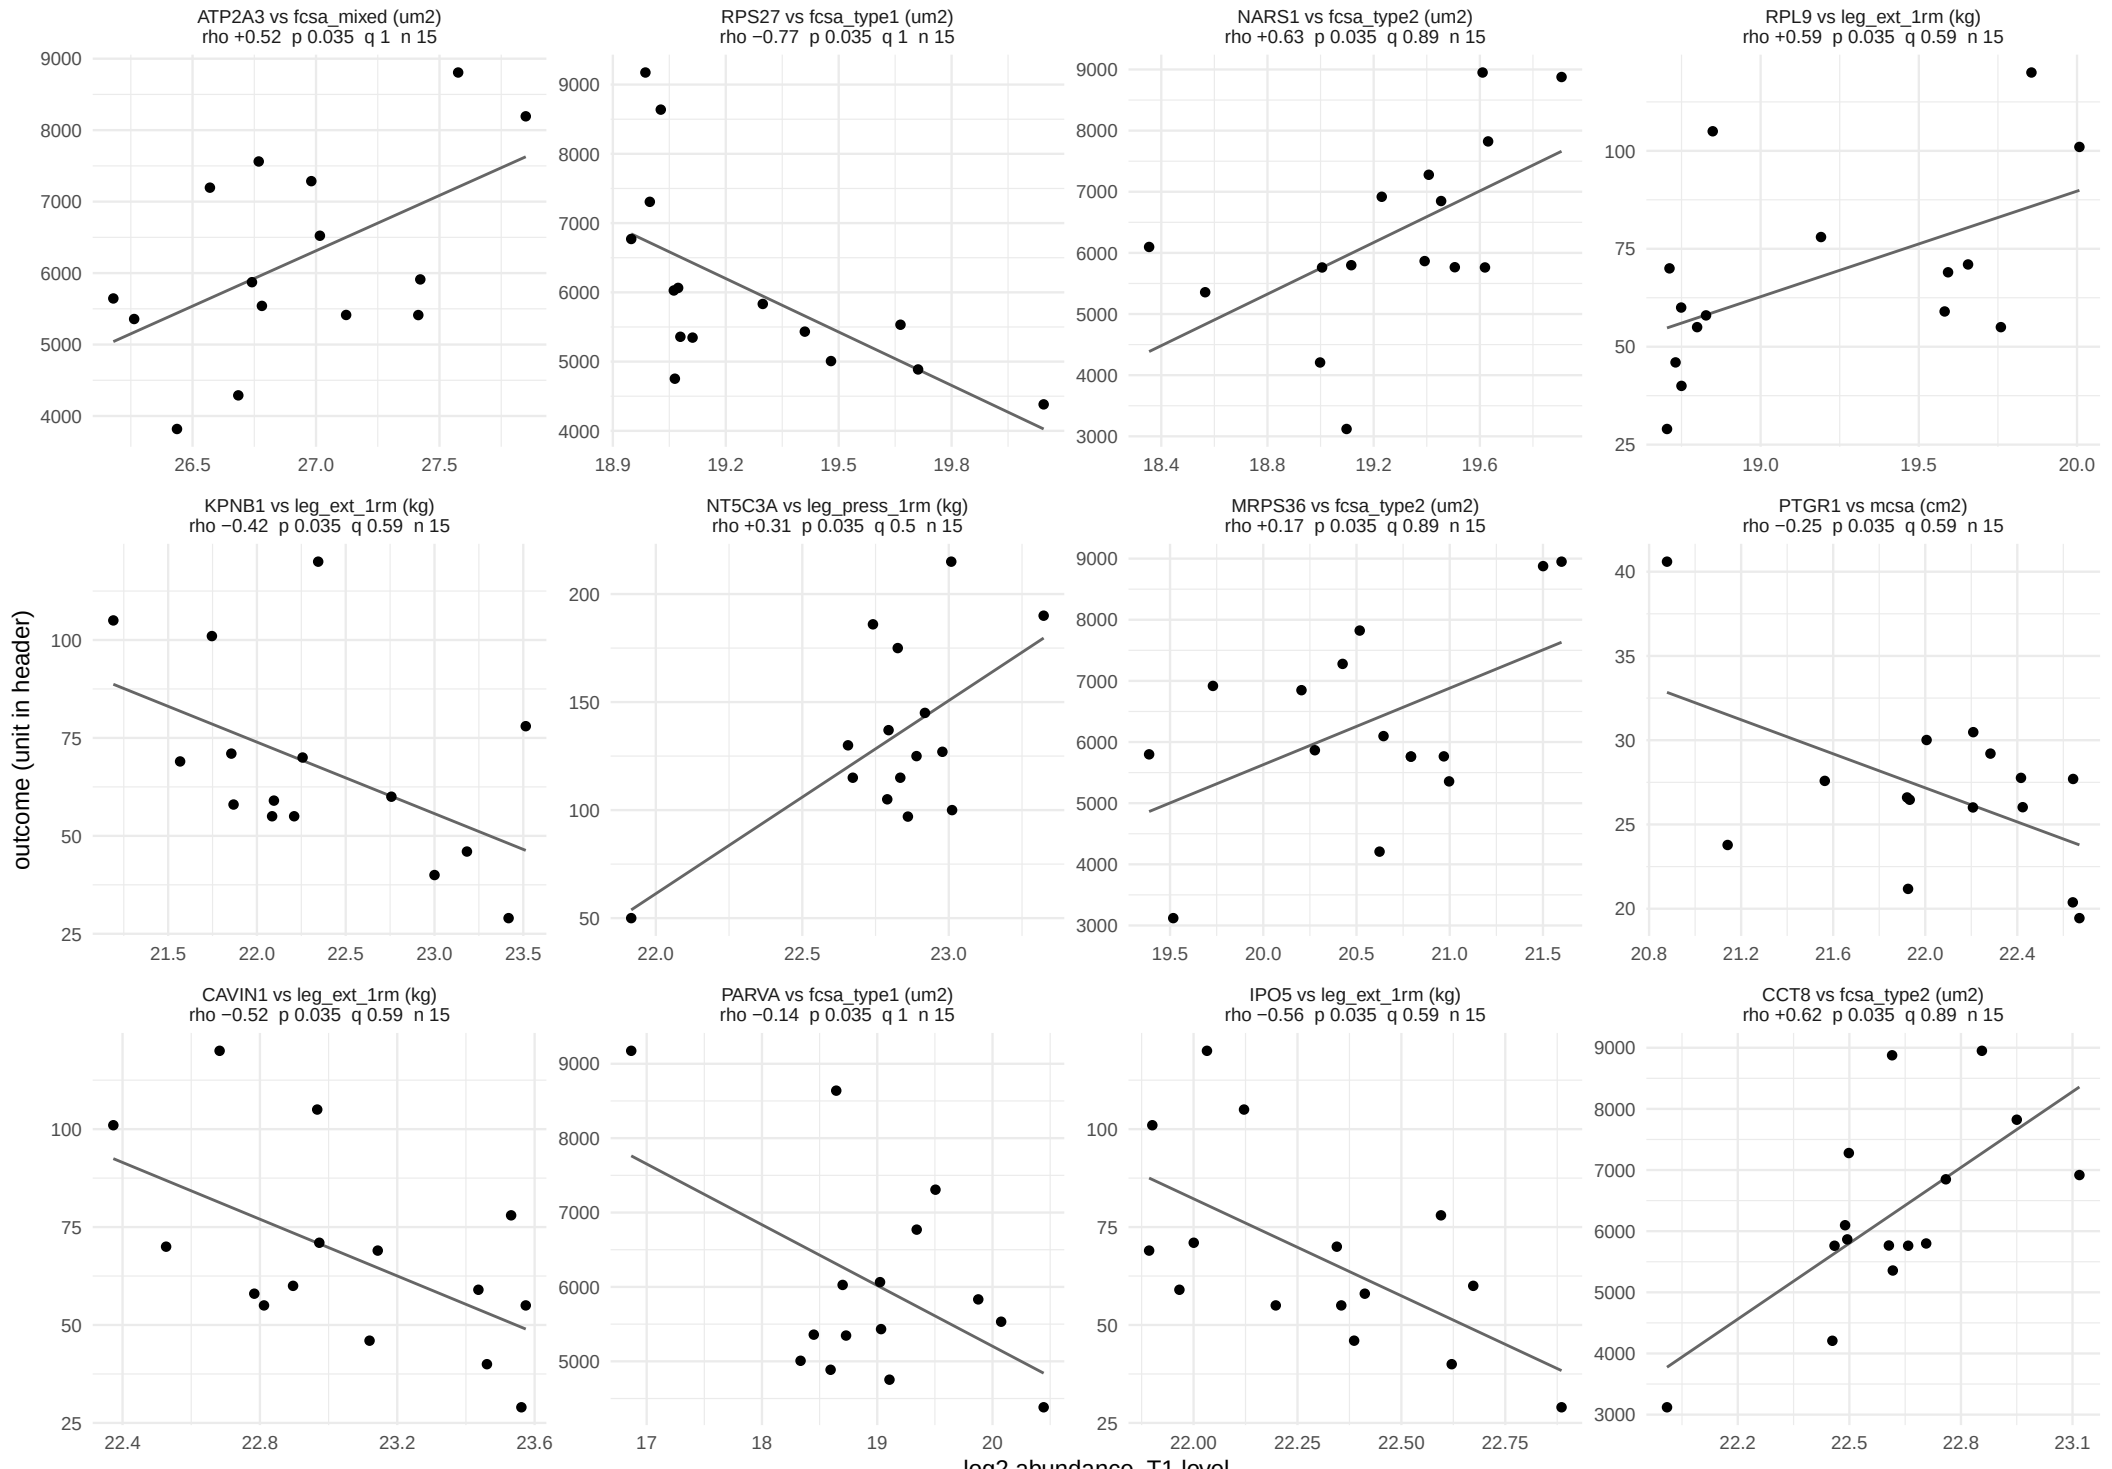

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline_level window


704 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 44 of 59.

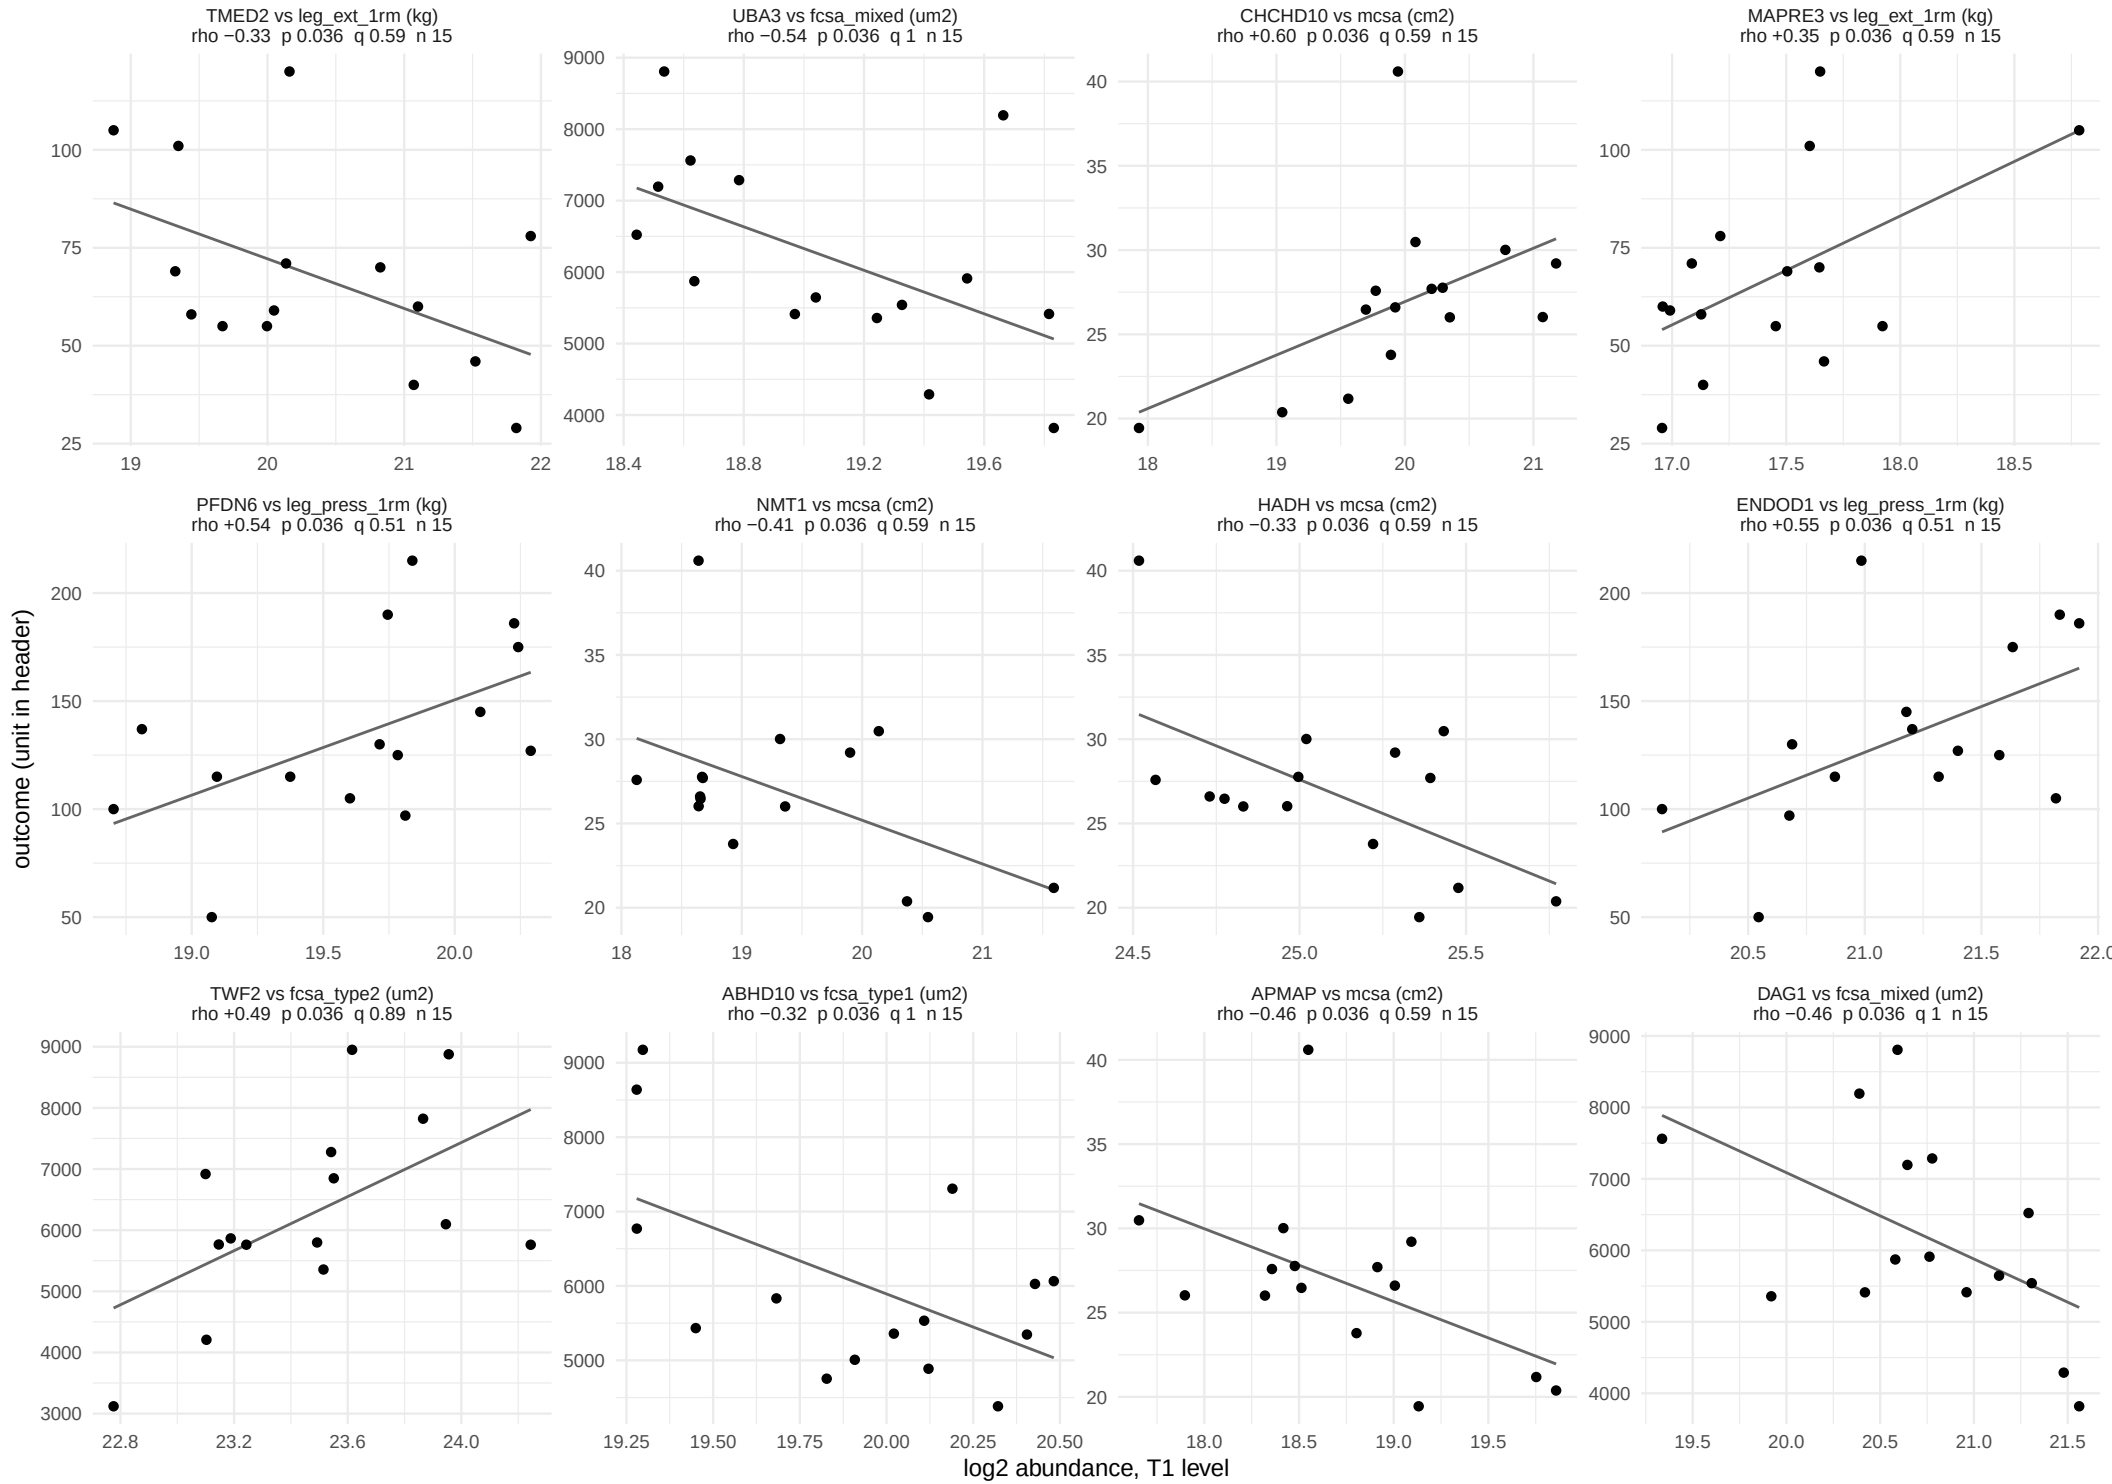

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline_level window


704 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 45 of 59.

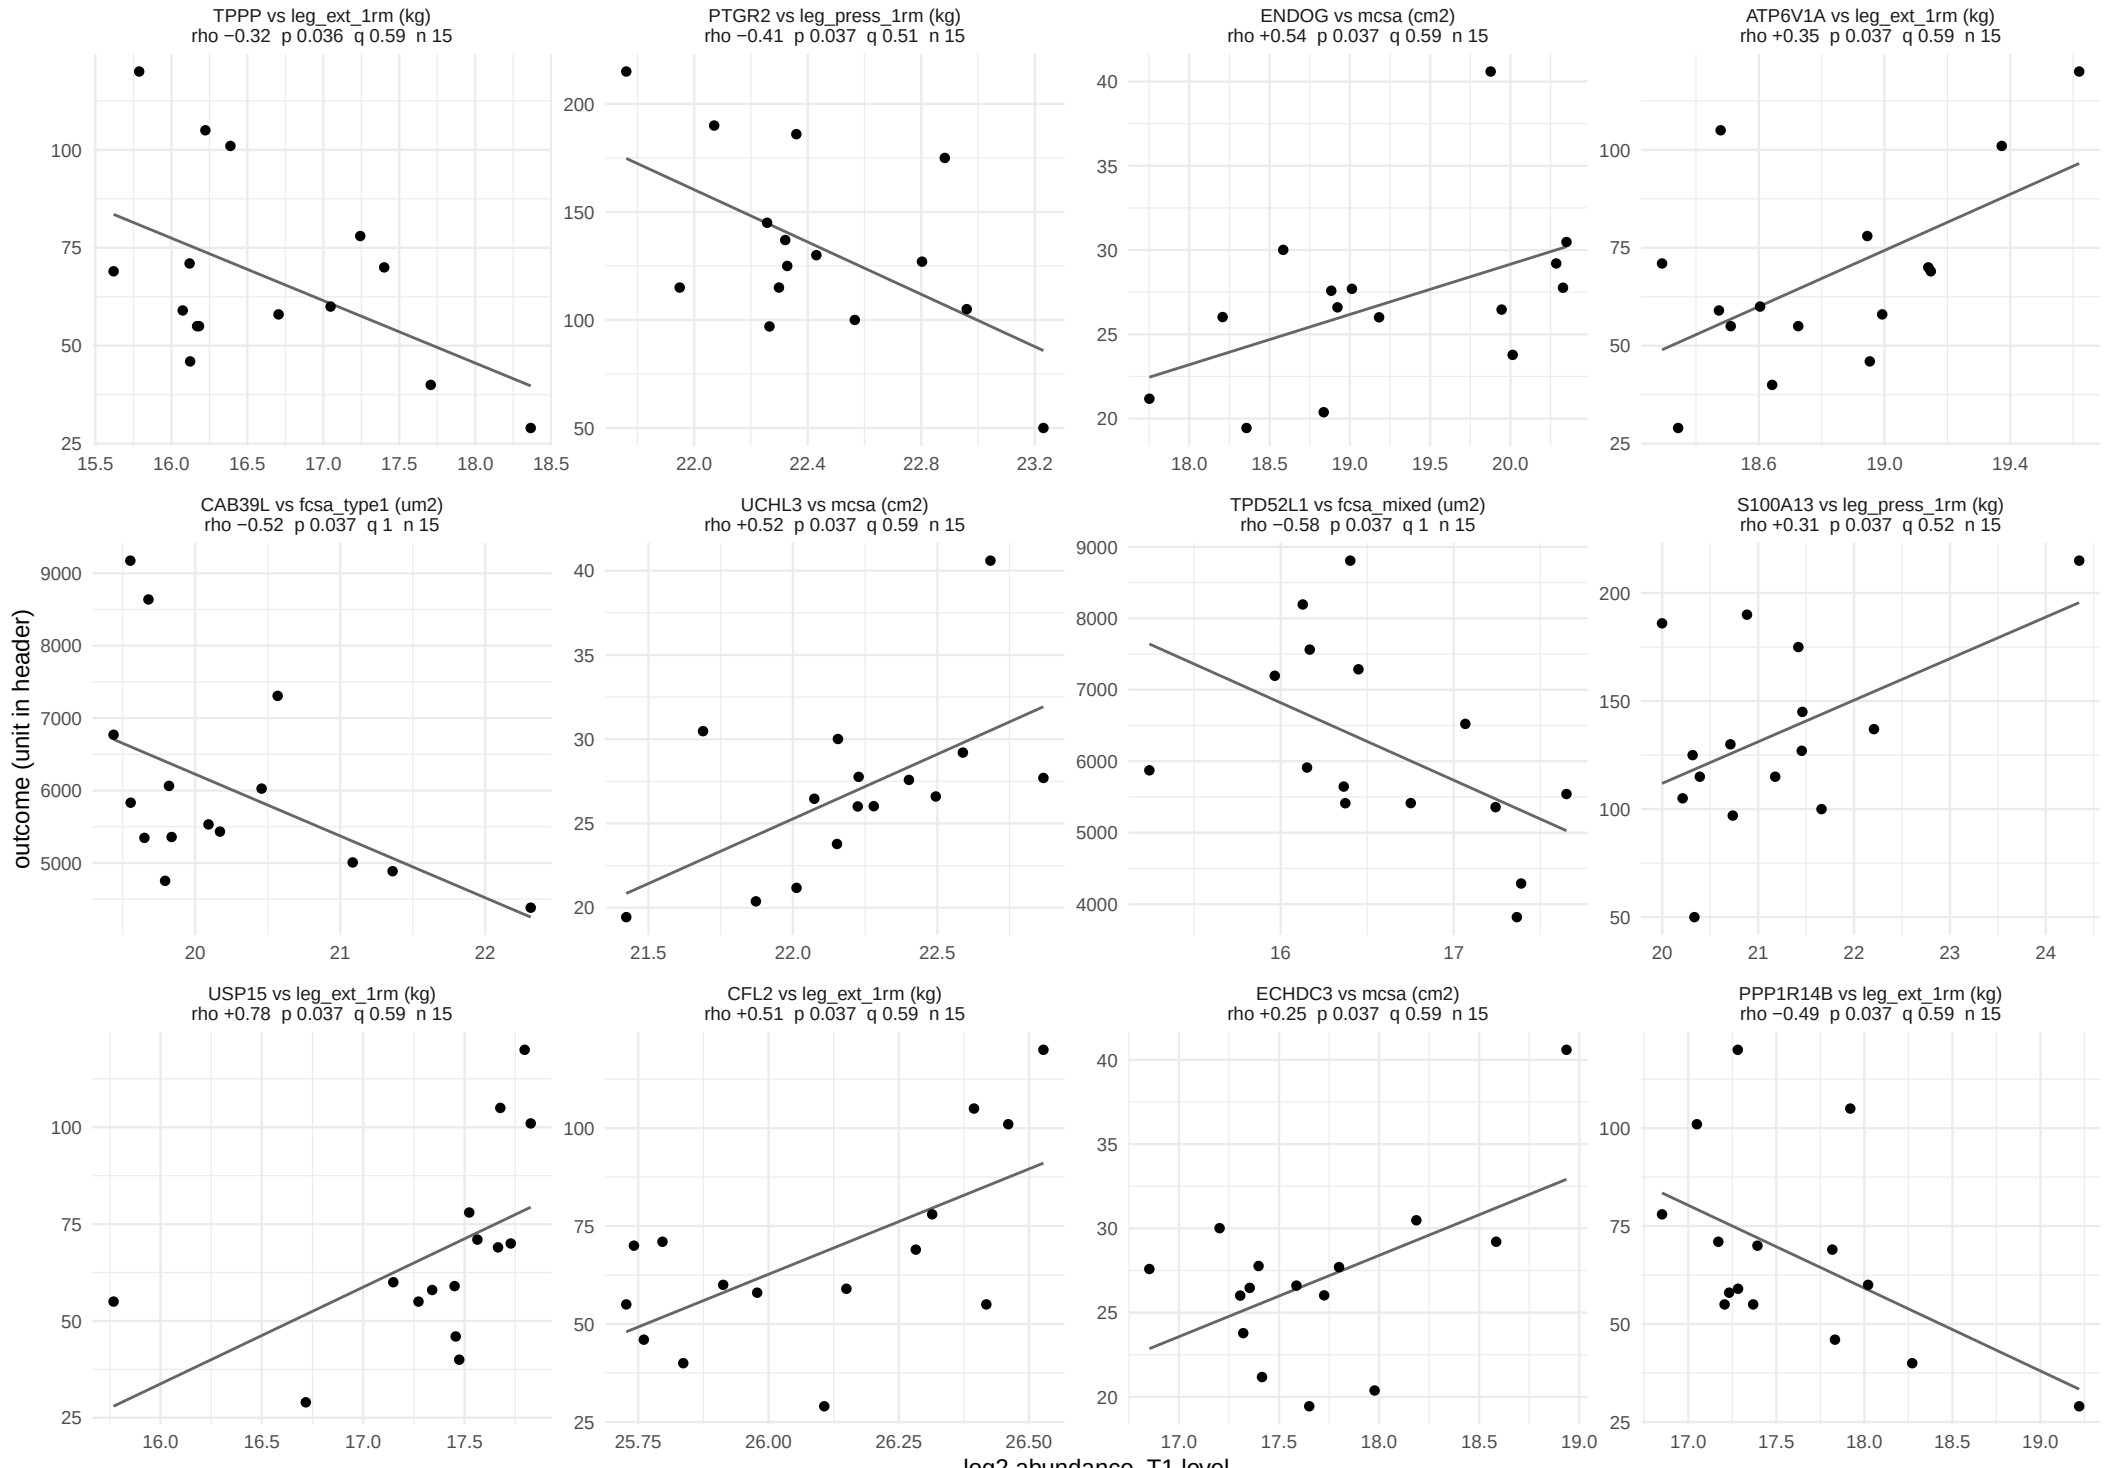

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline_level window


704 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 46 of 59.

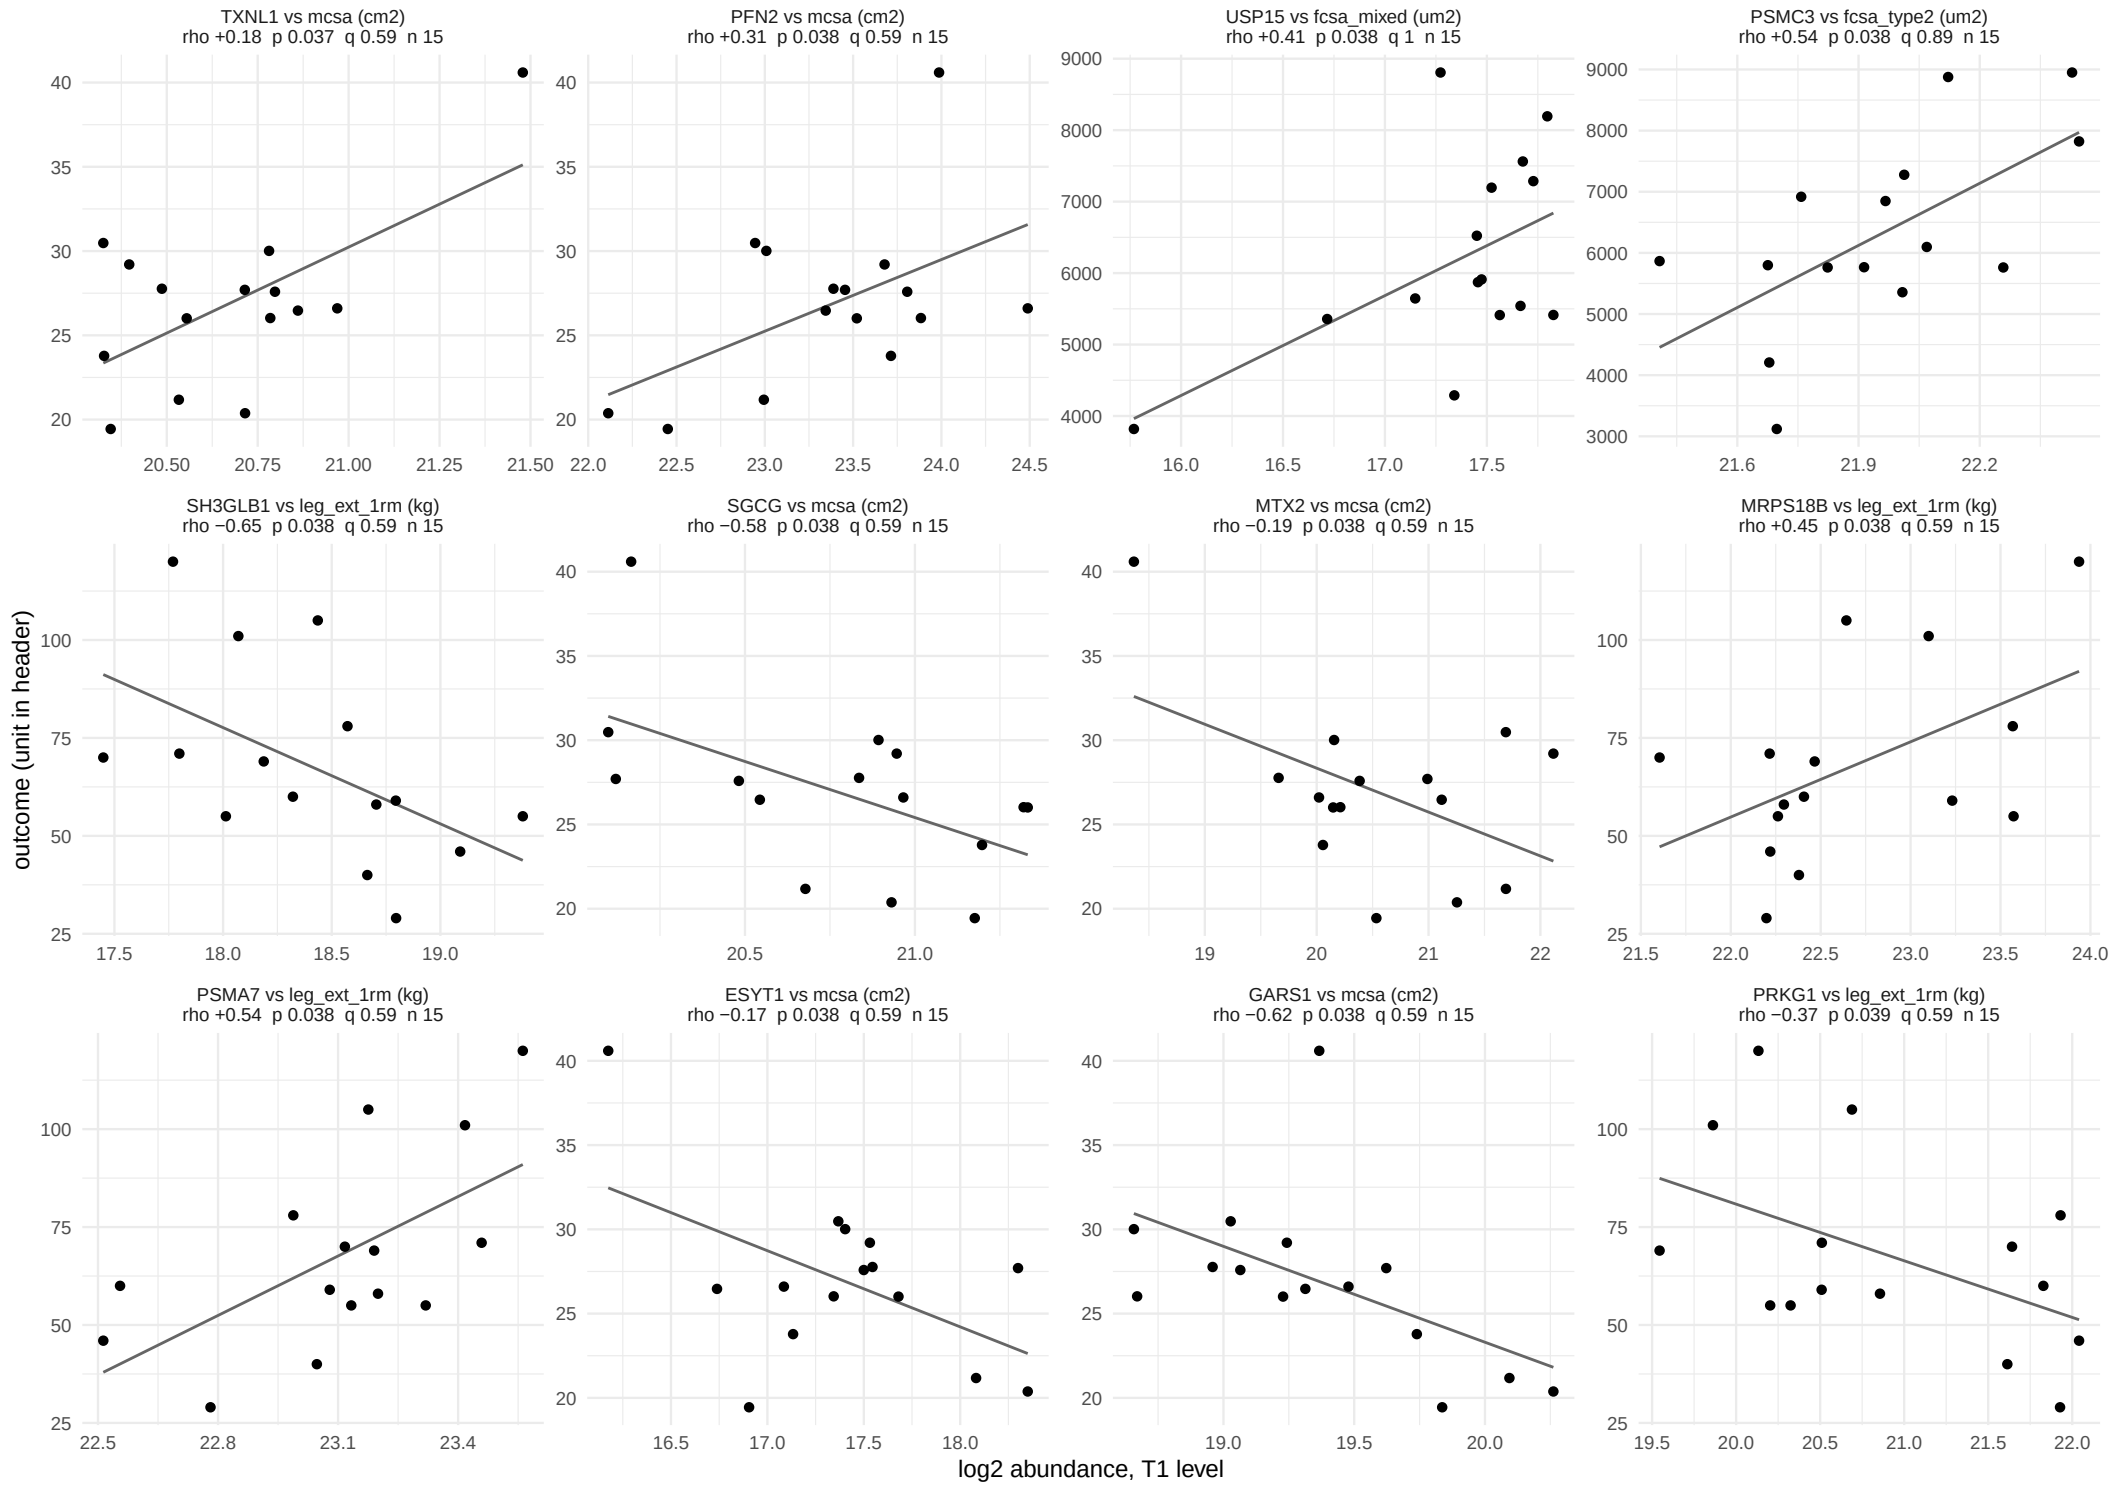

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline_level window


704 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 47 of 59.

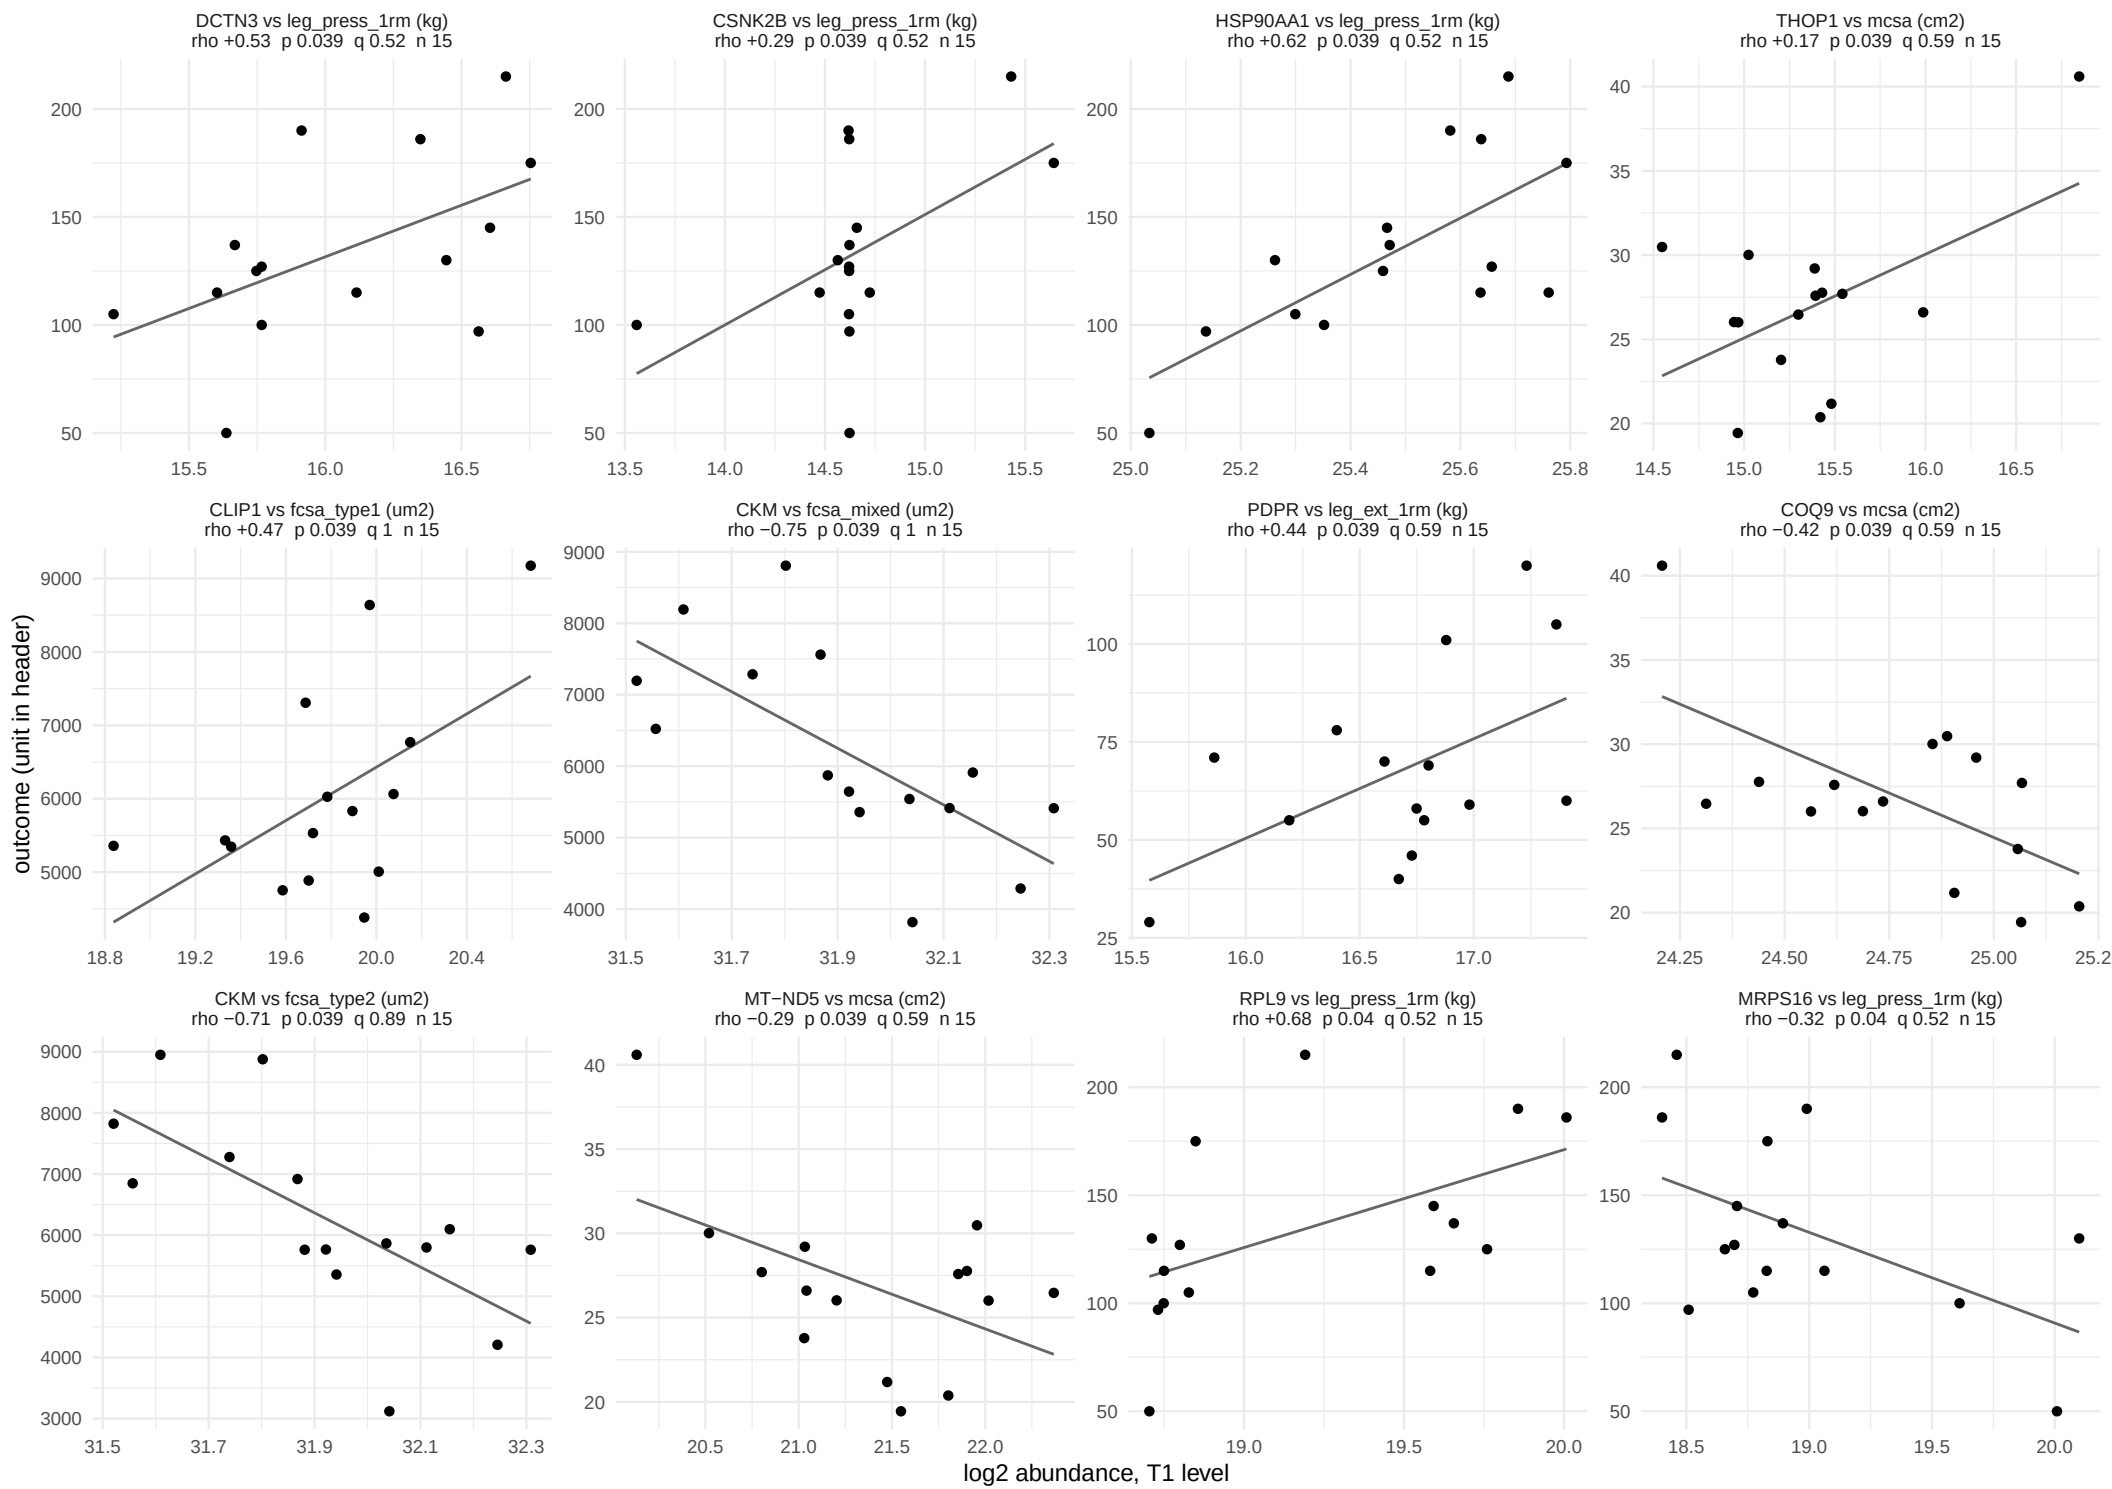

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline_level window


704 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 48 of 59.

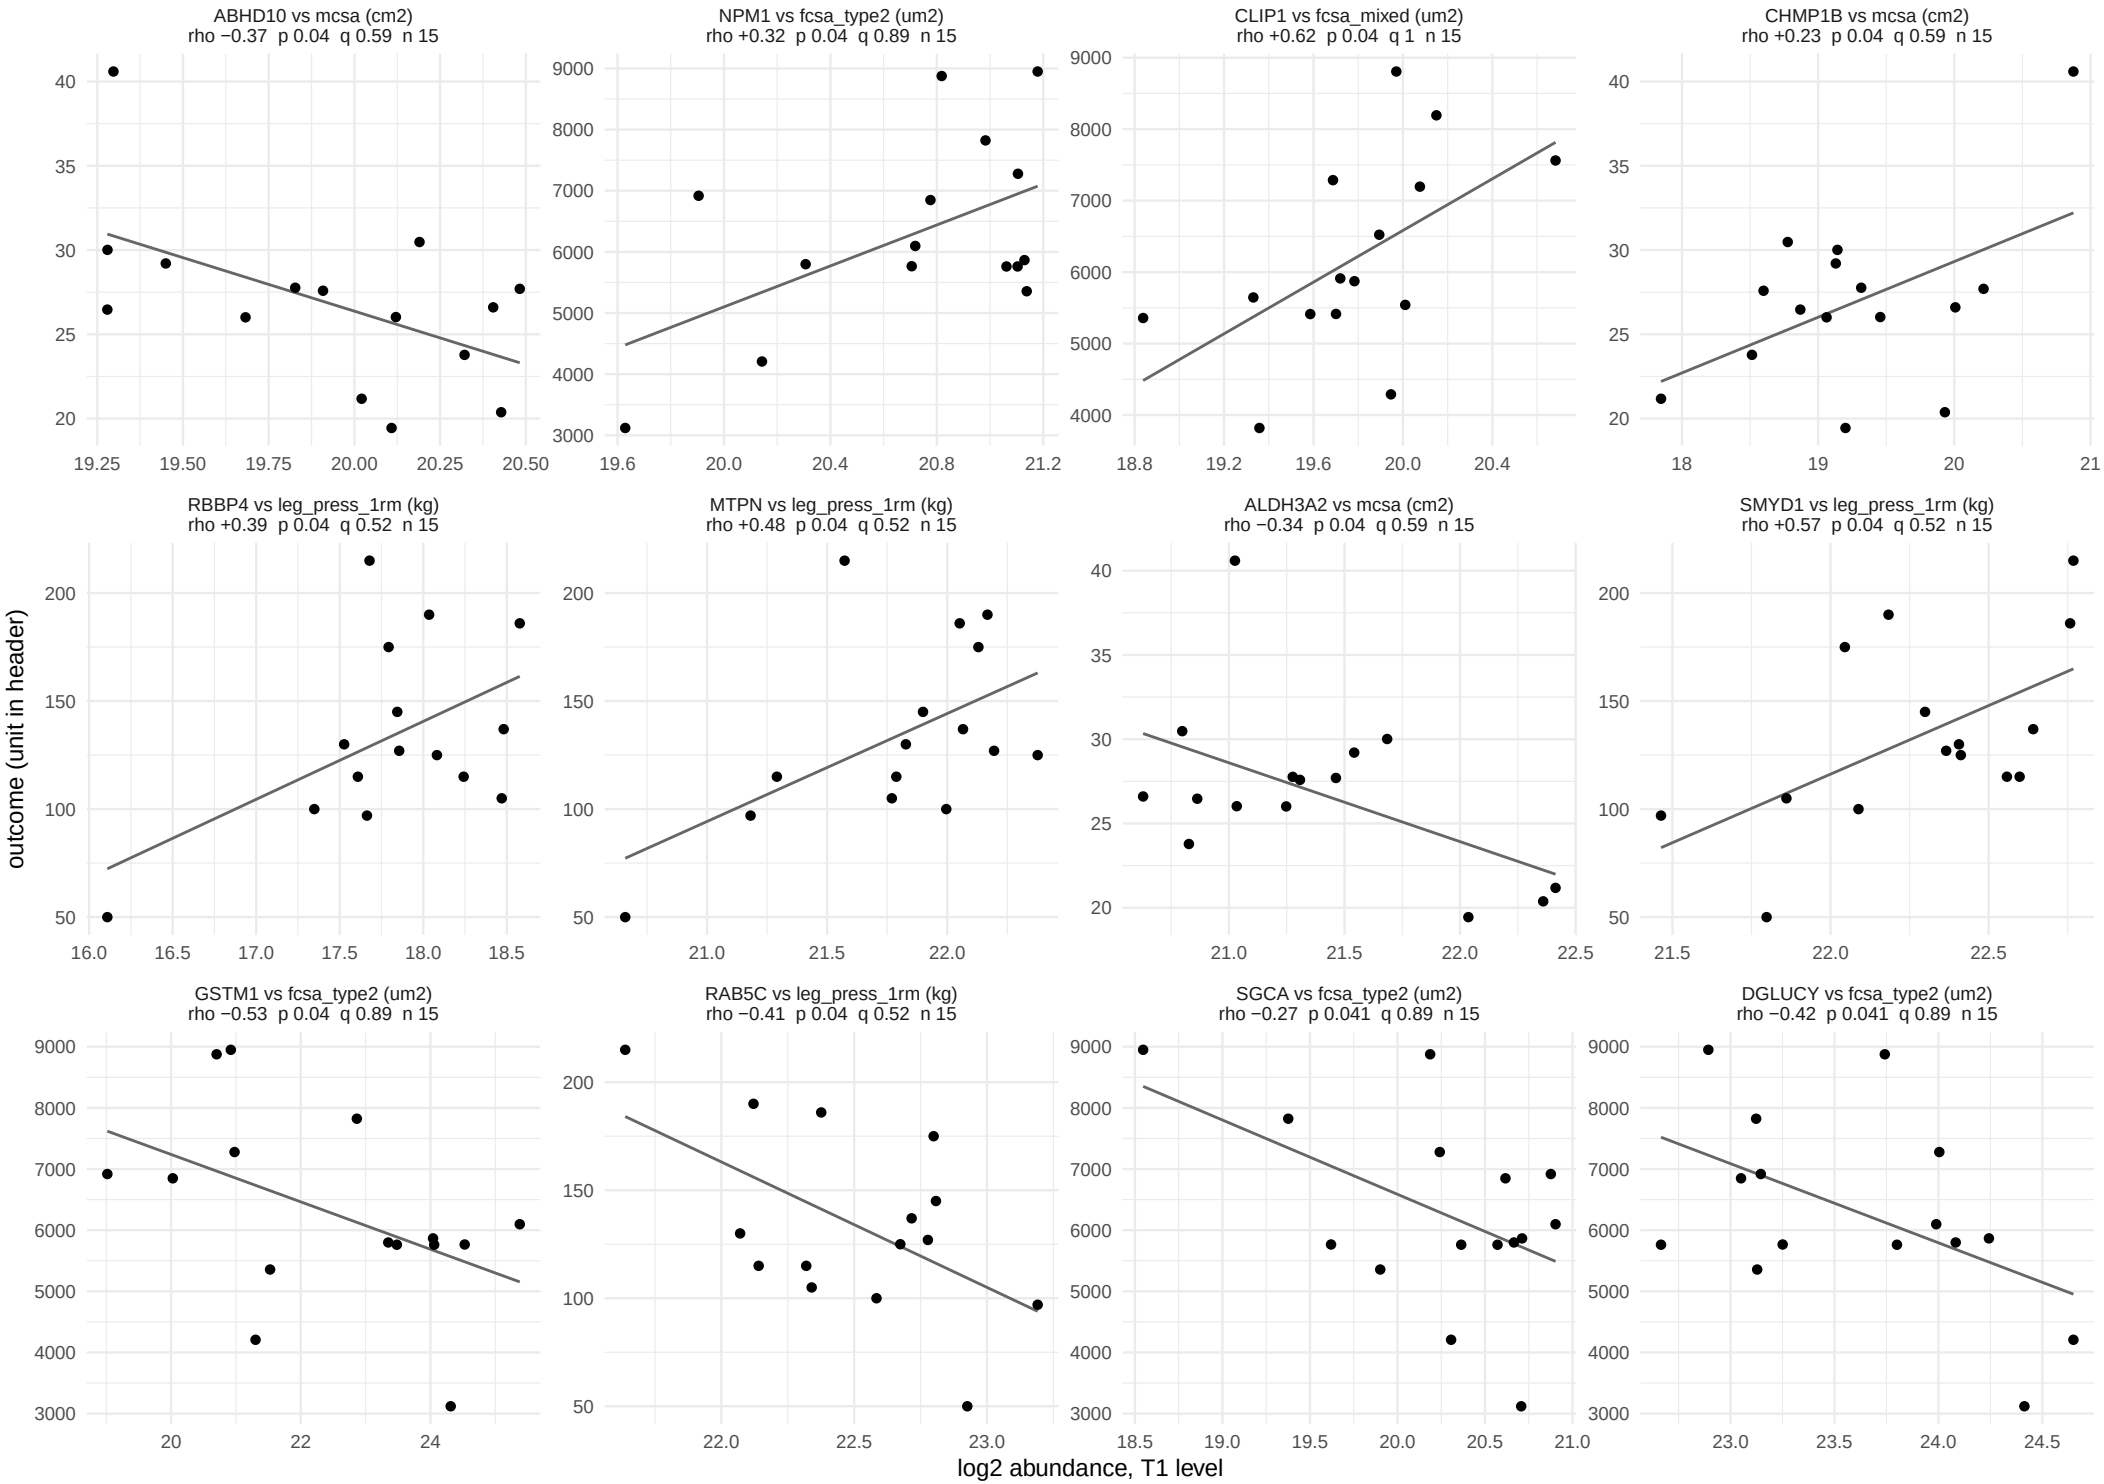

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline_level window


704 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 49 of 59.

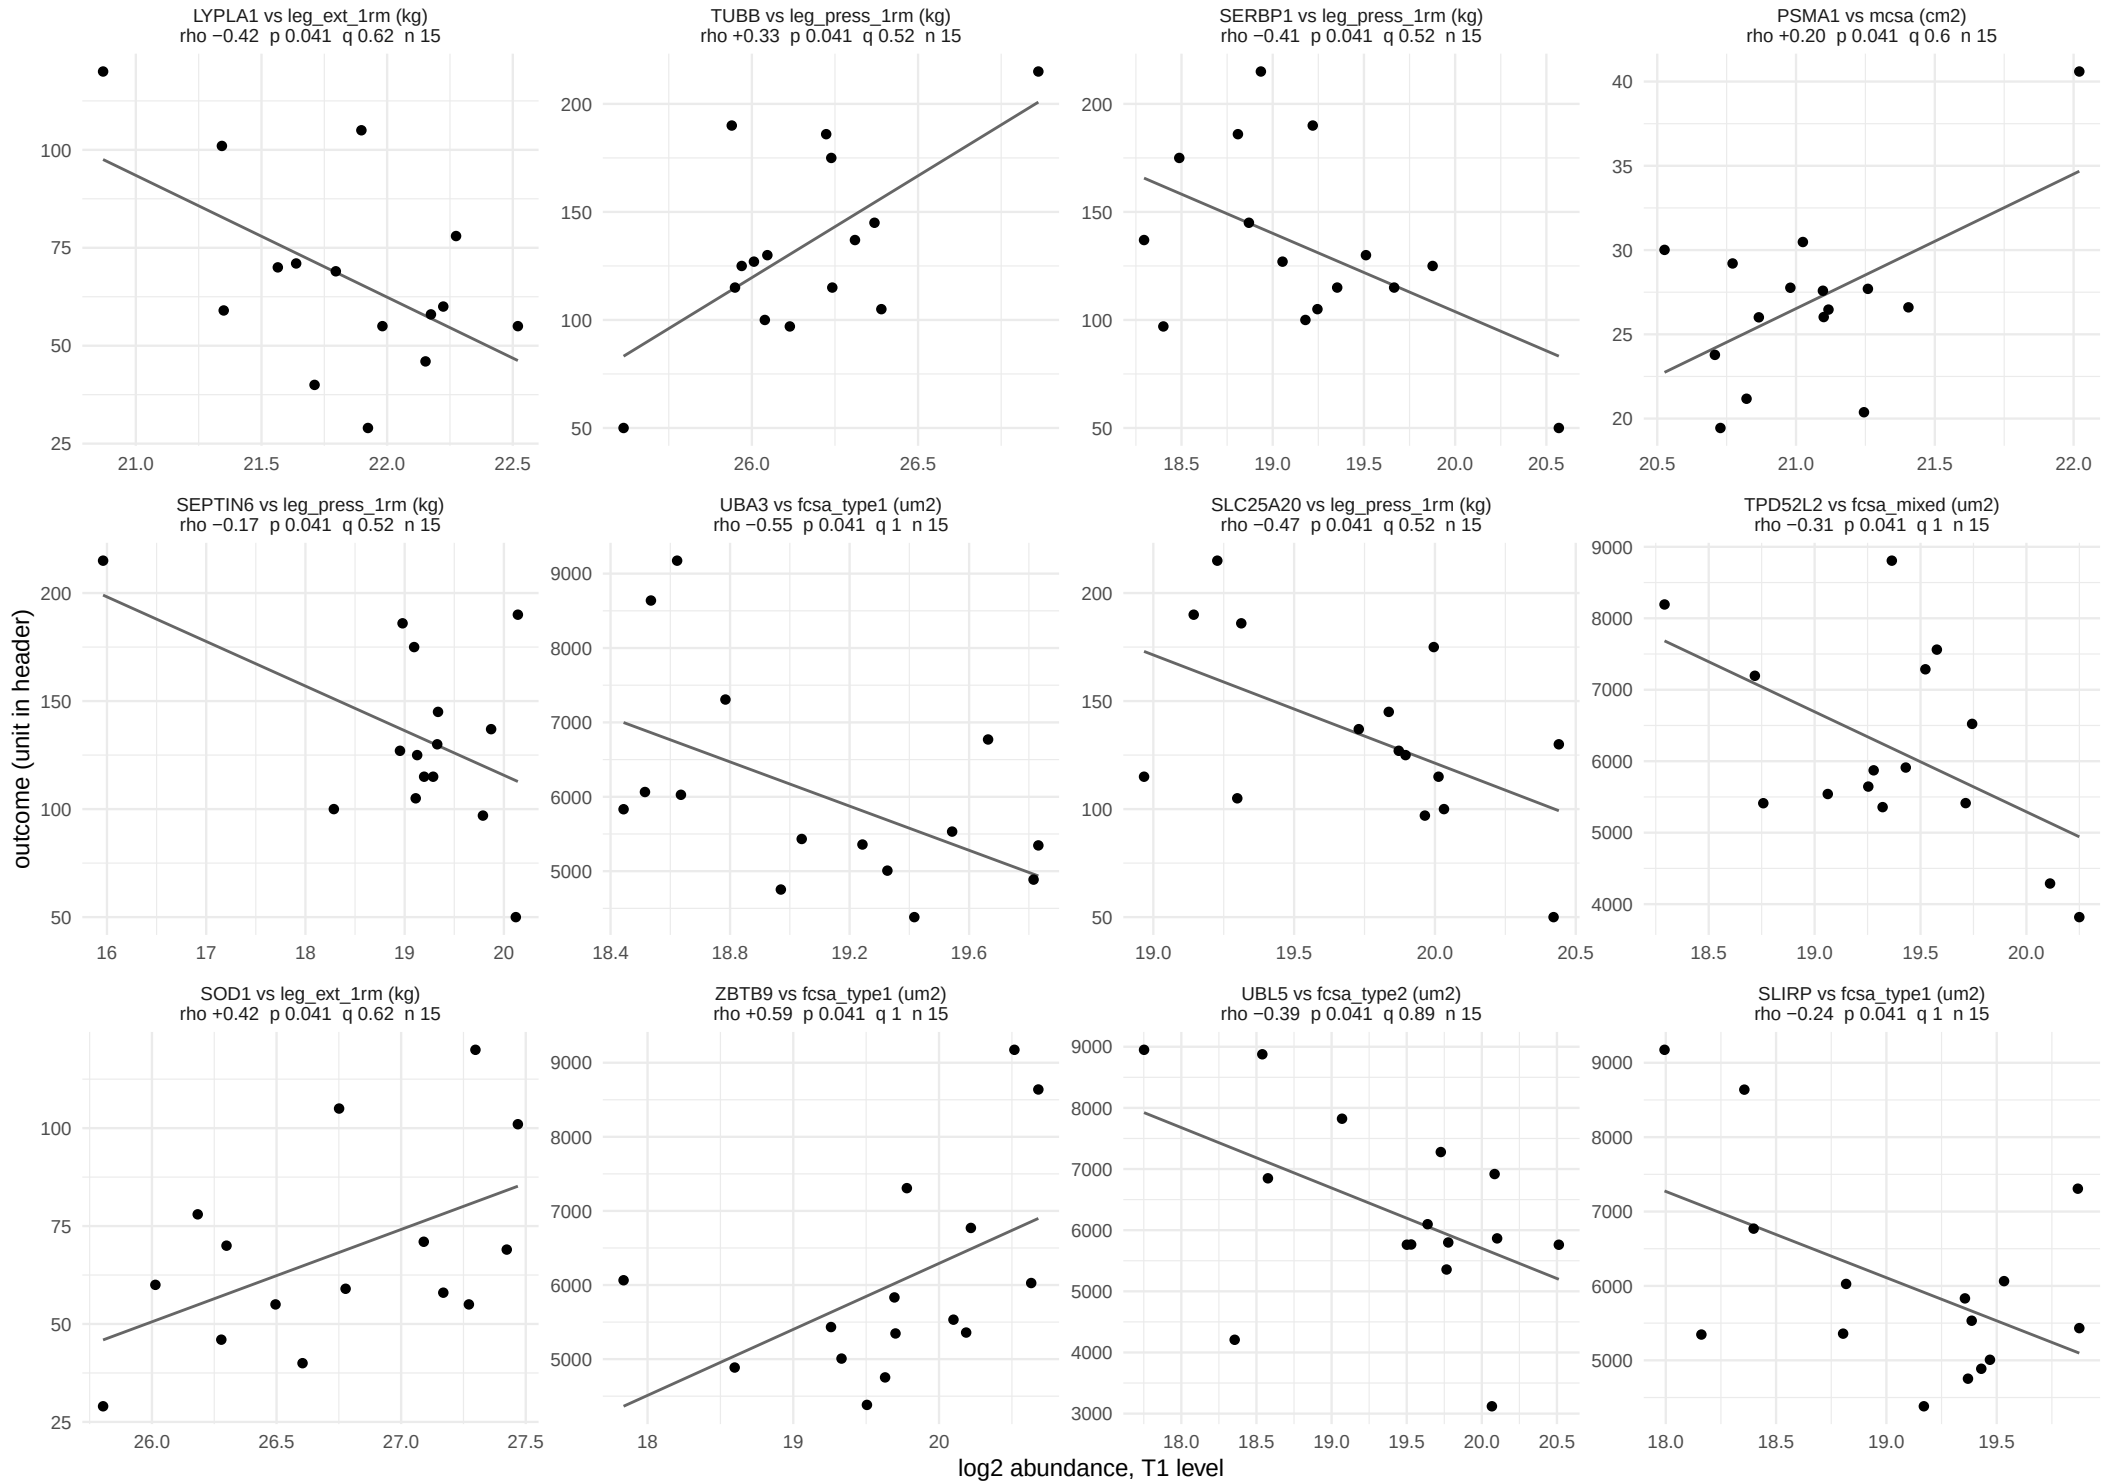

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline_level window


704 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 50 of 59.

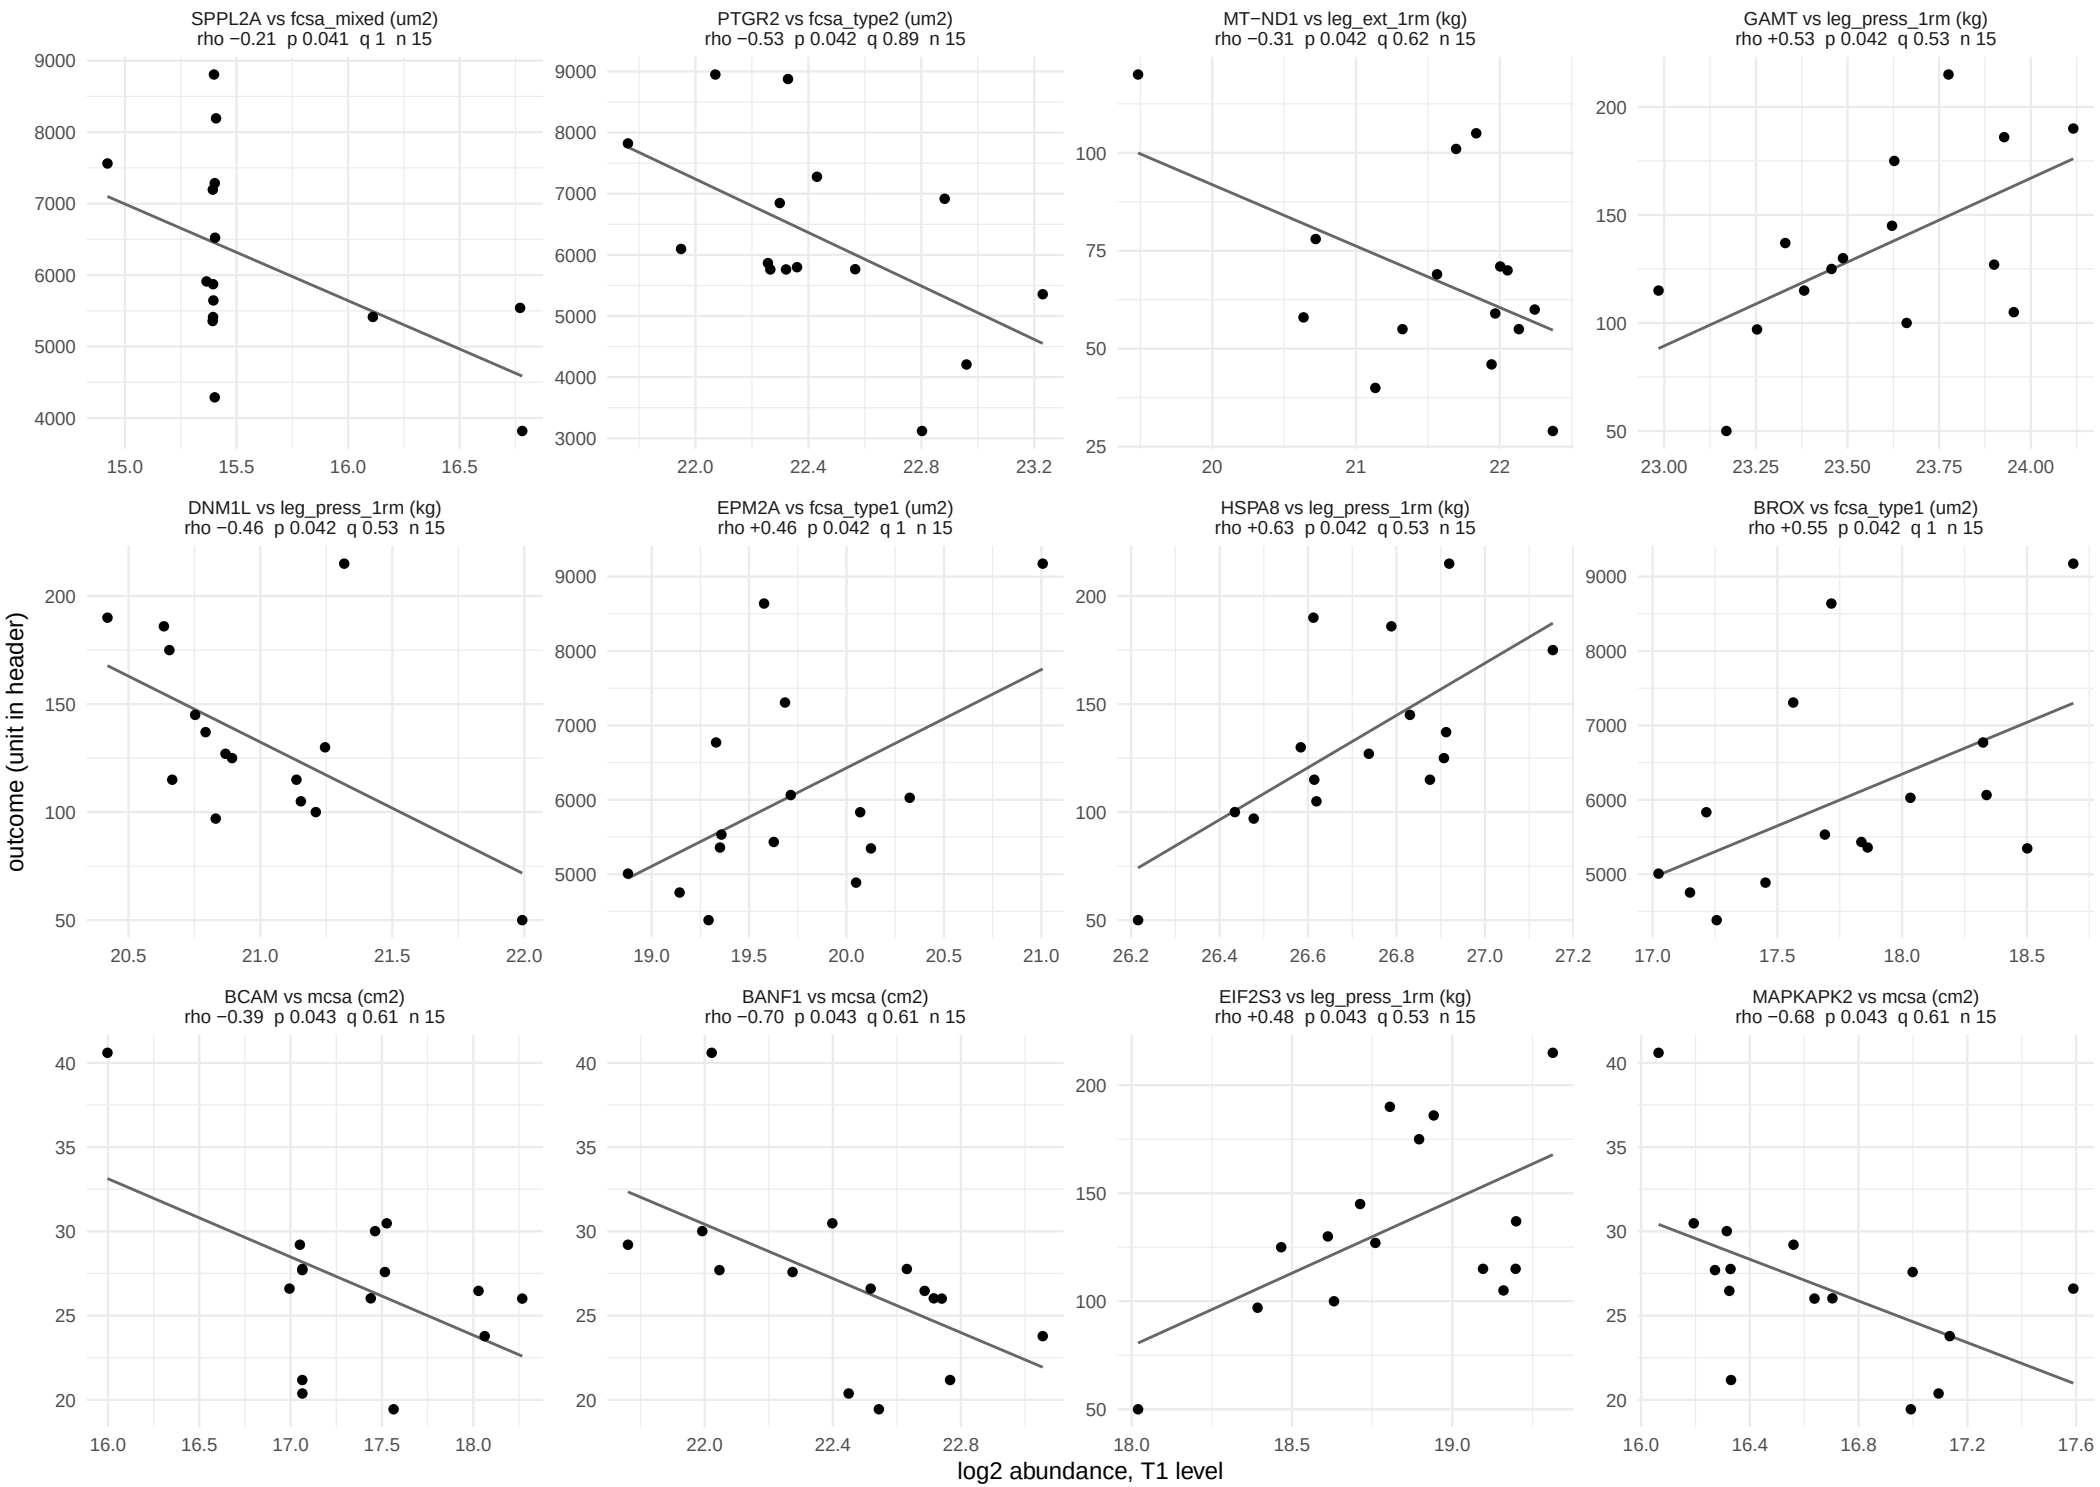

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline_level window


704 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 51 of 59.

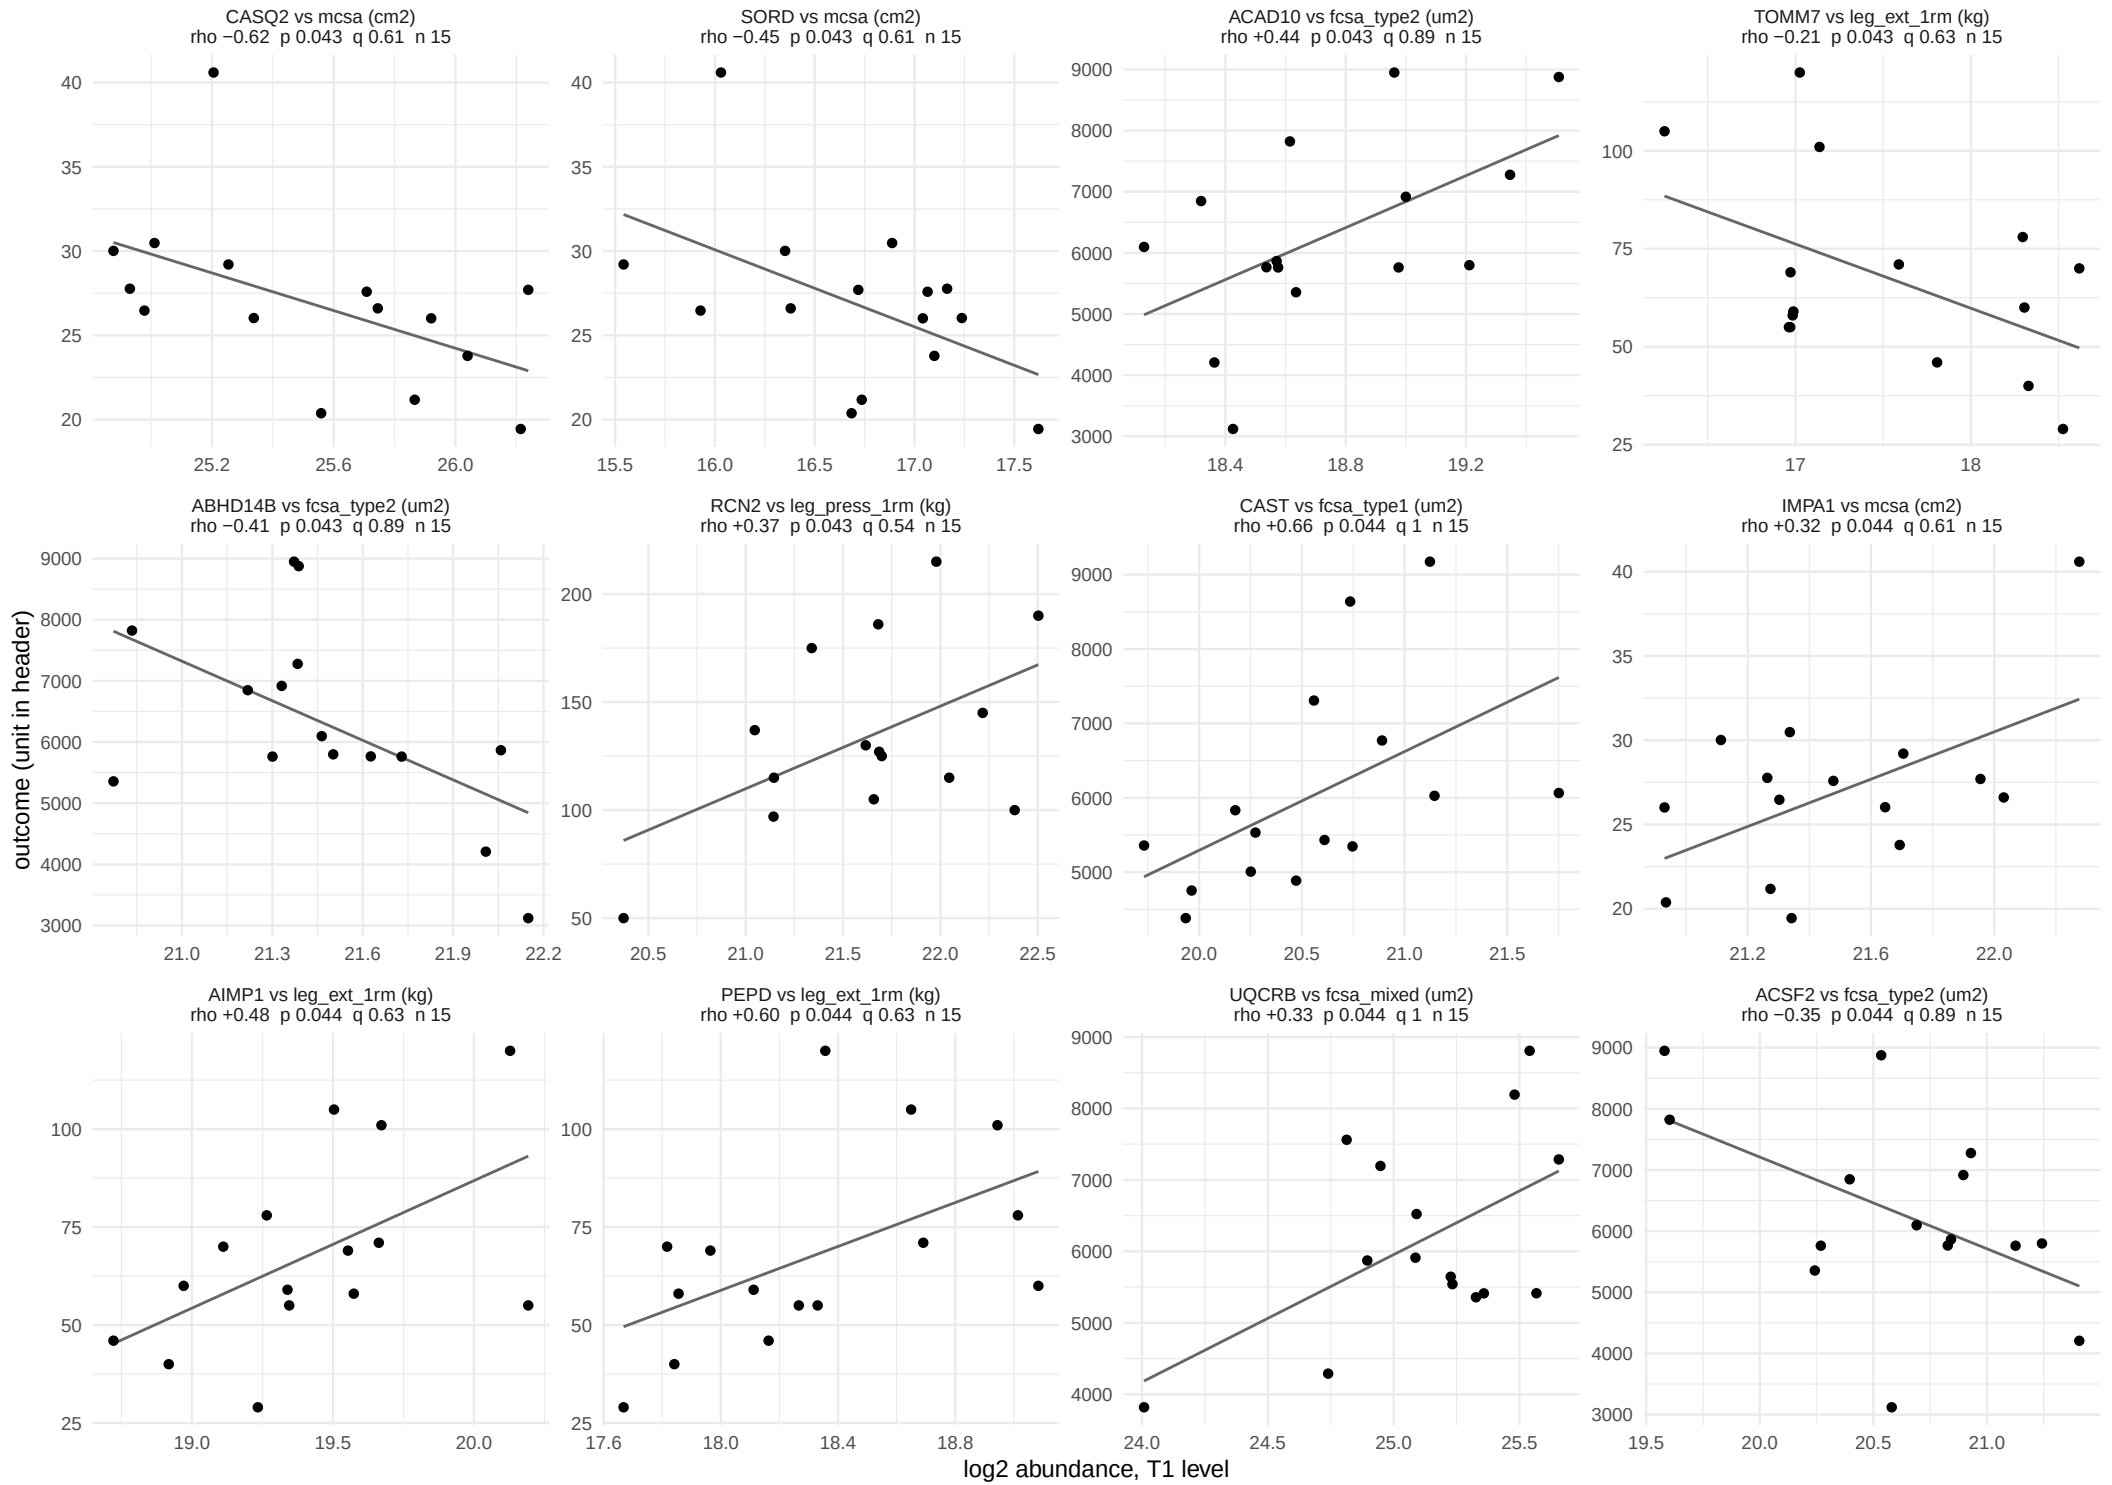

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline_level window


704 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 52 of 59.

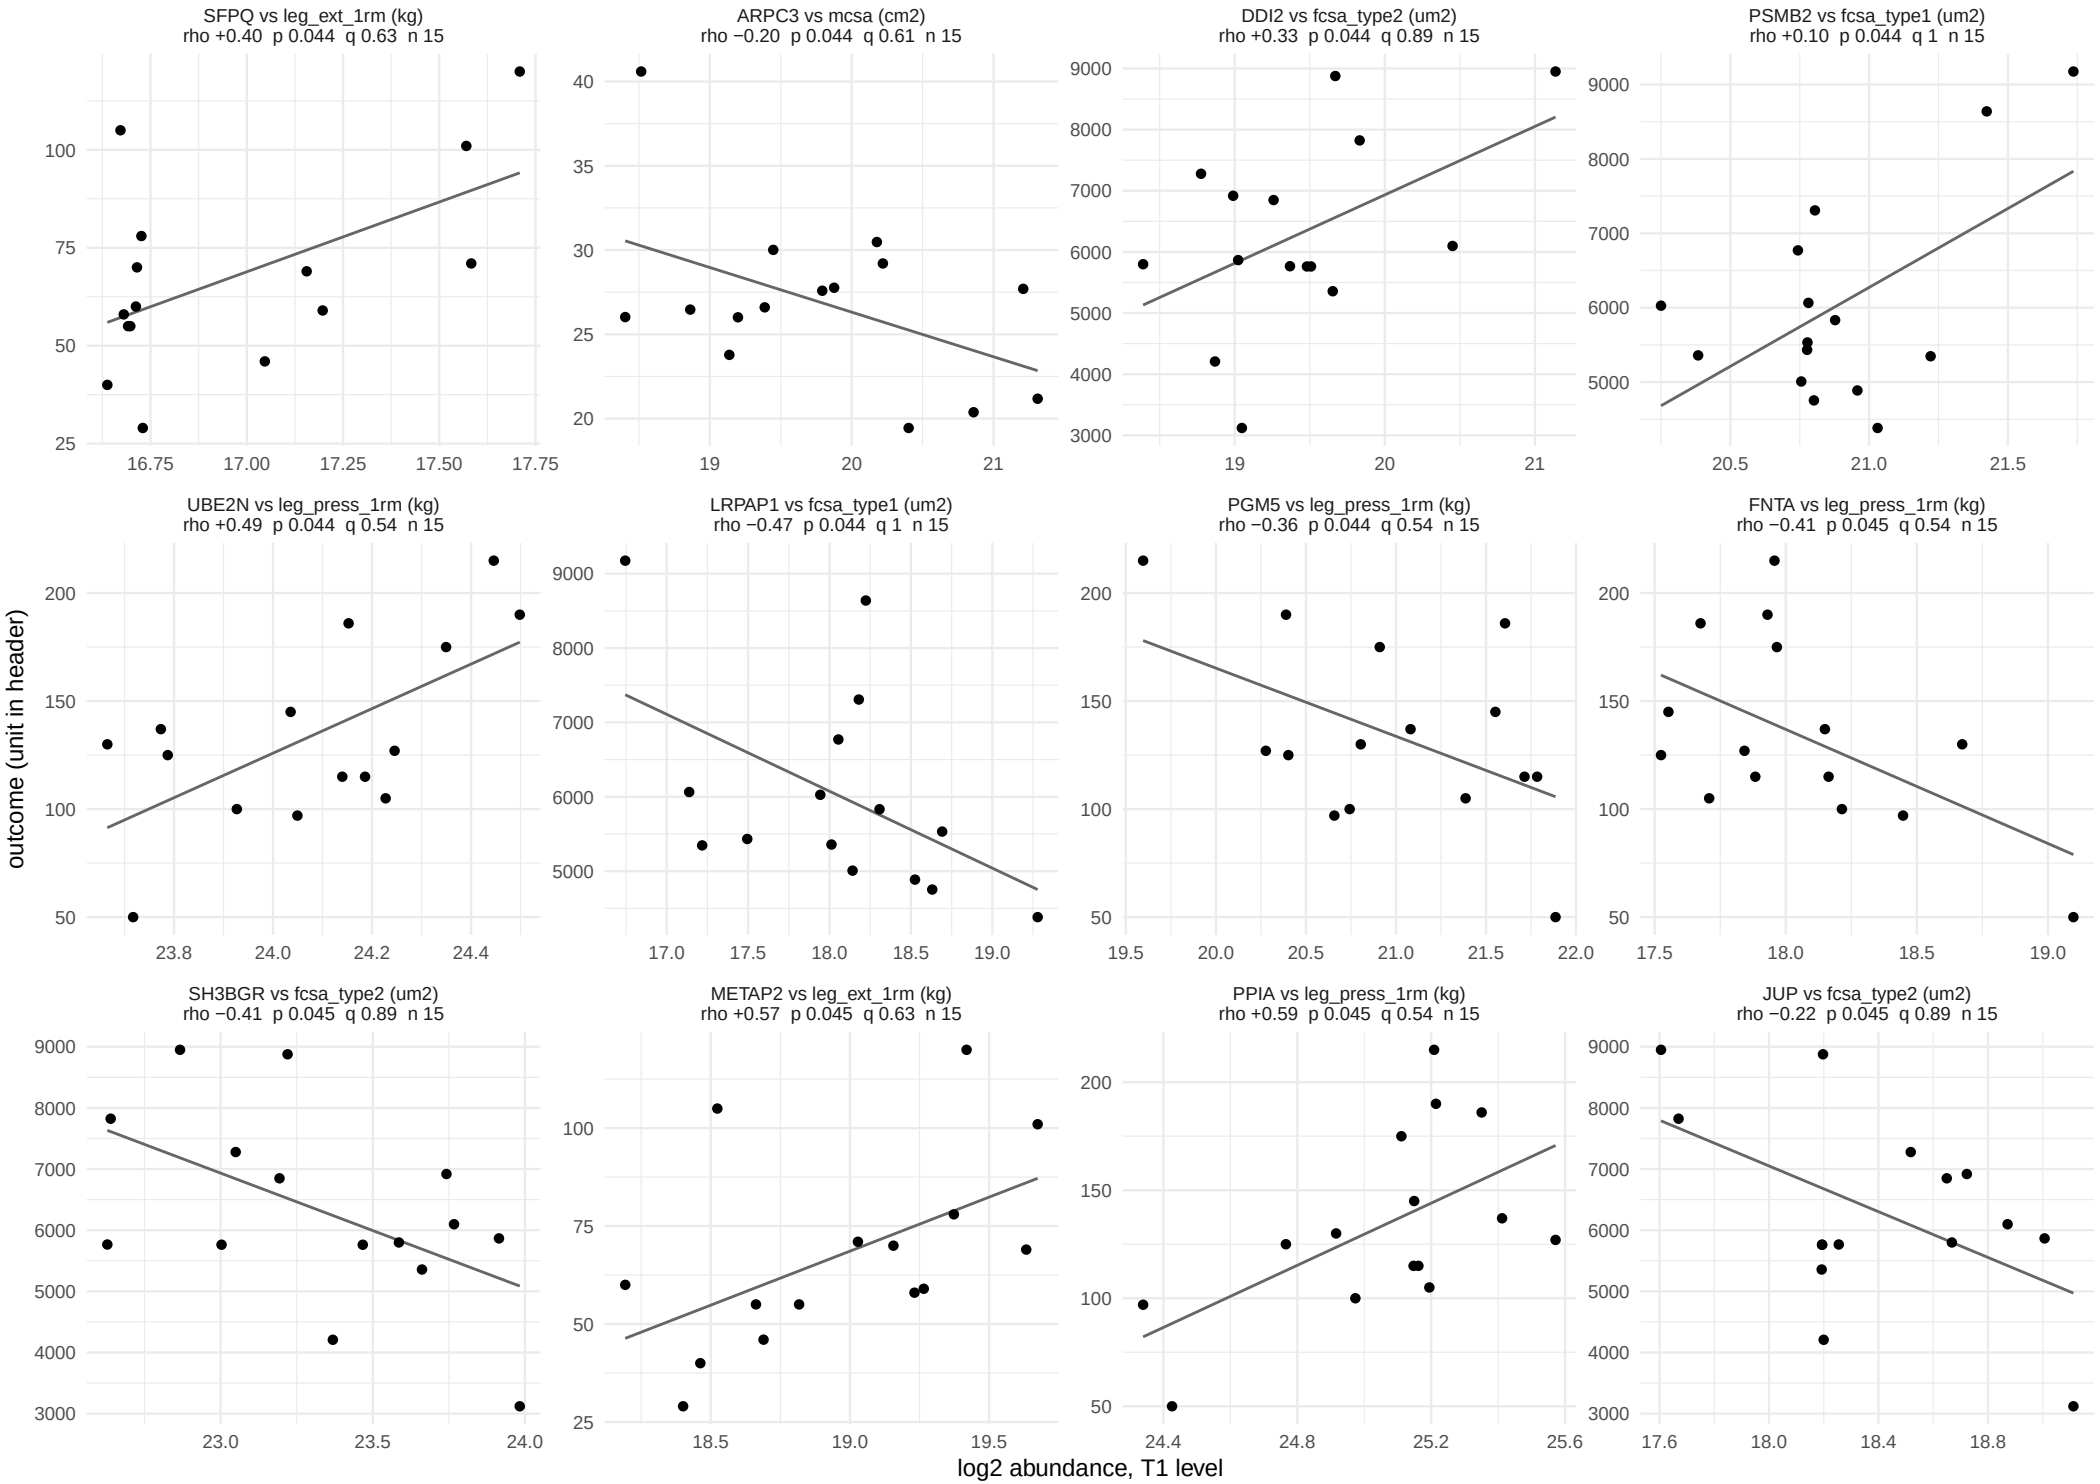

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline_level window


704 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 53 of 59.

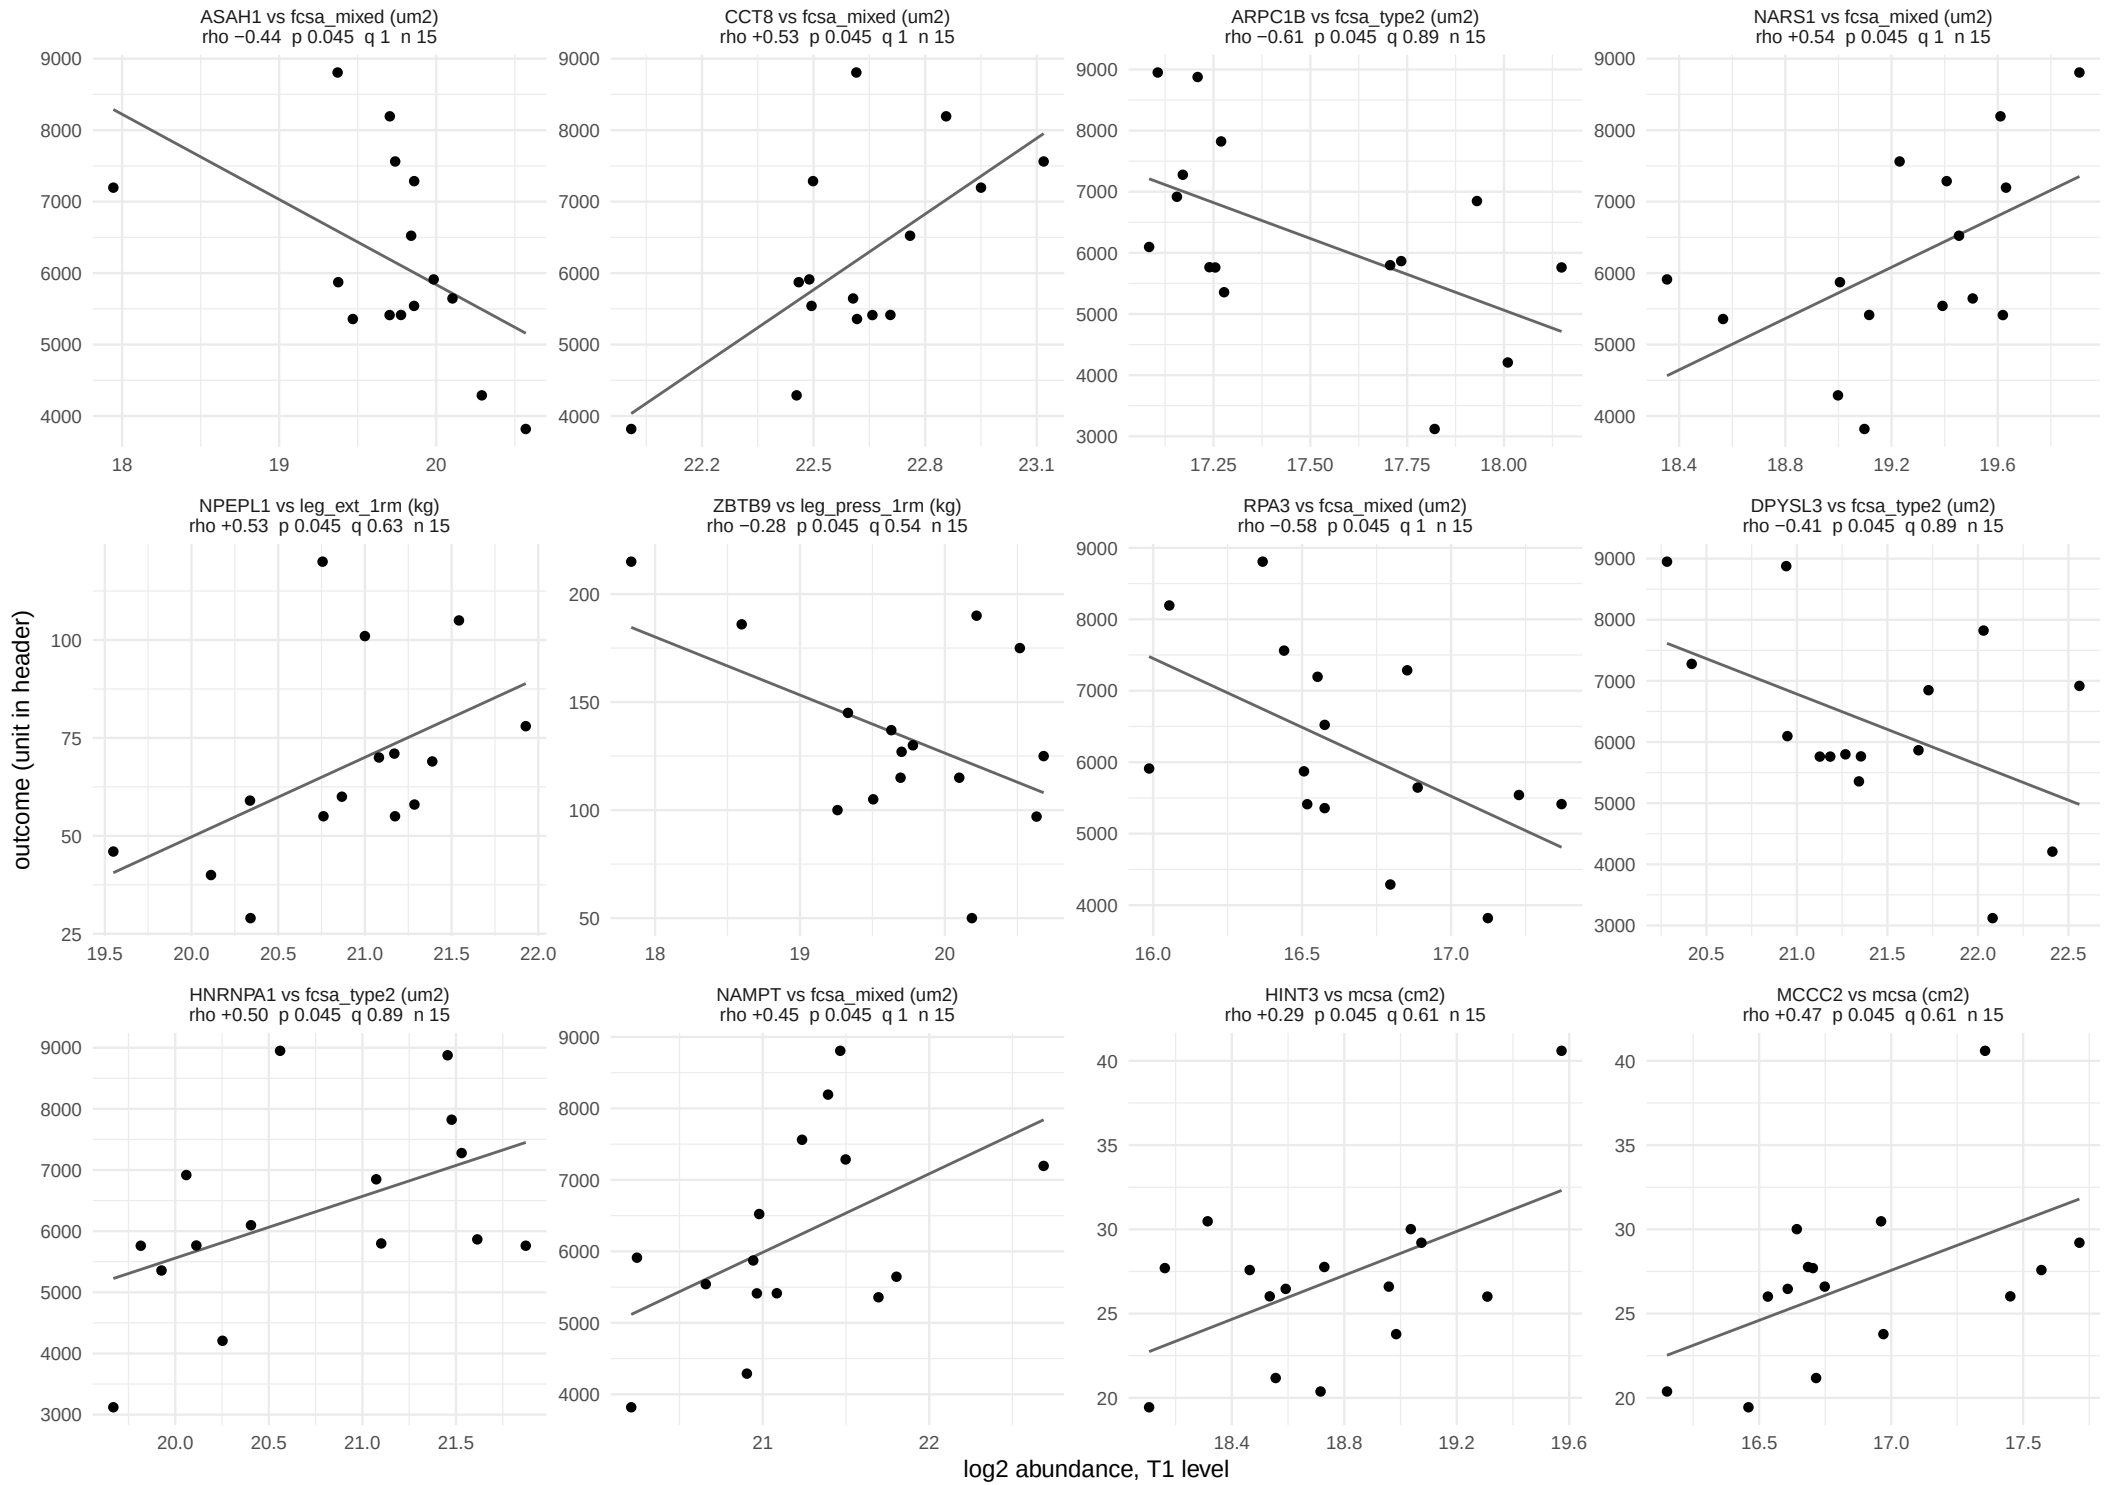

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline_level window


704 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 54 of 59.

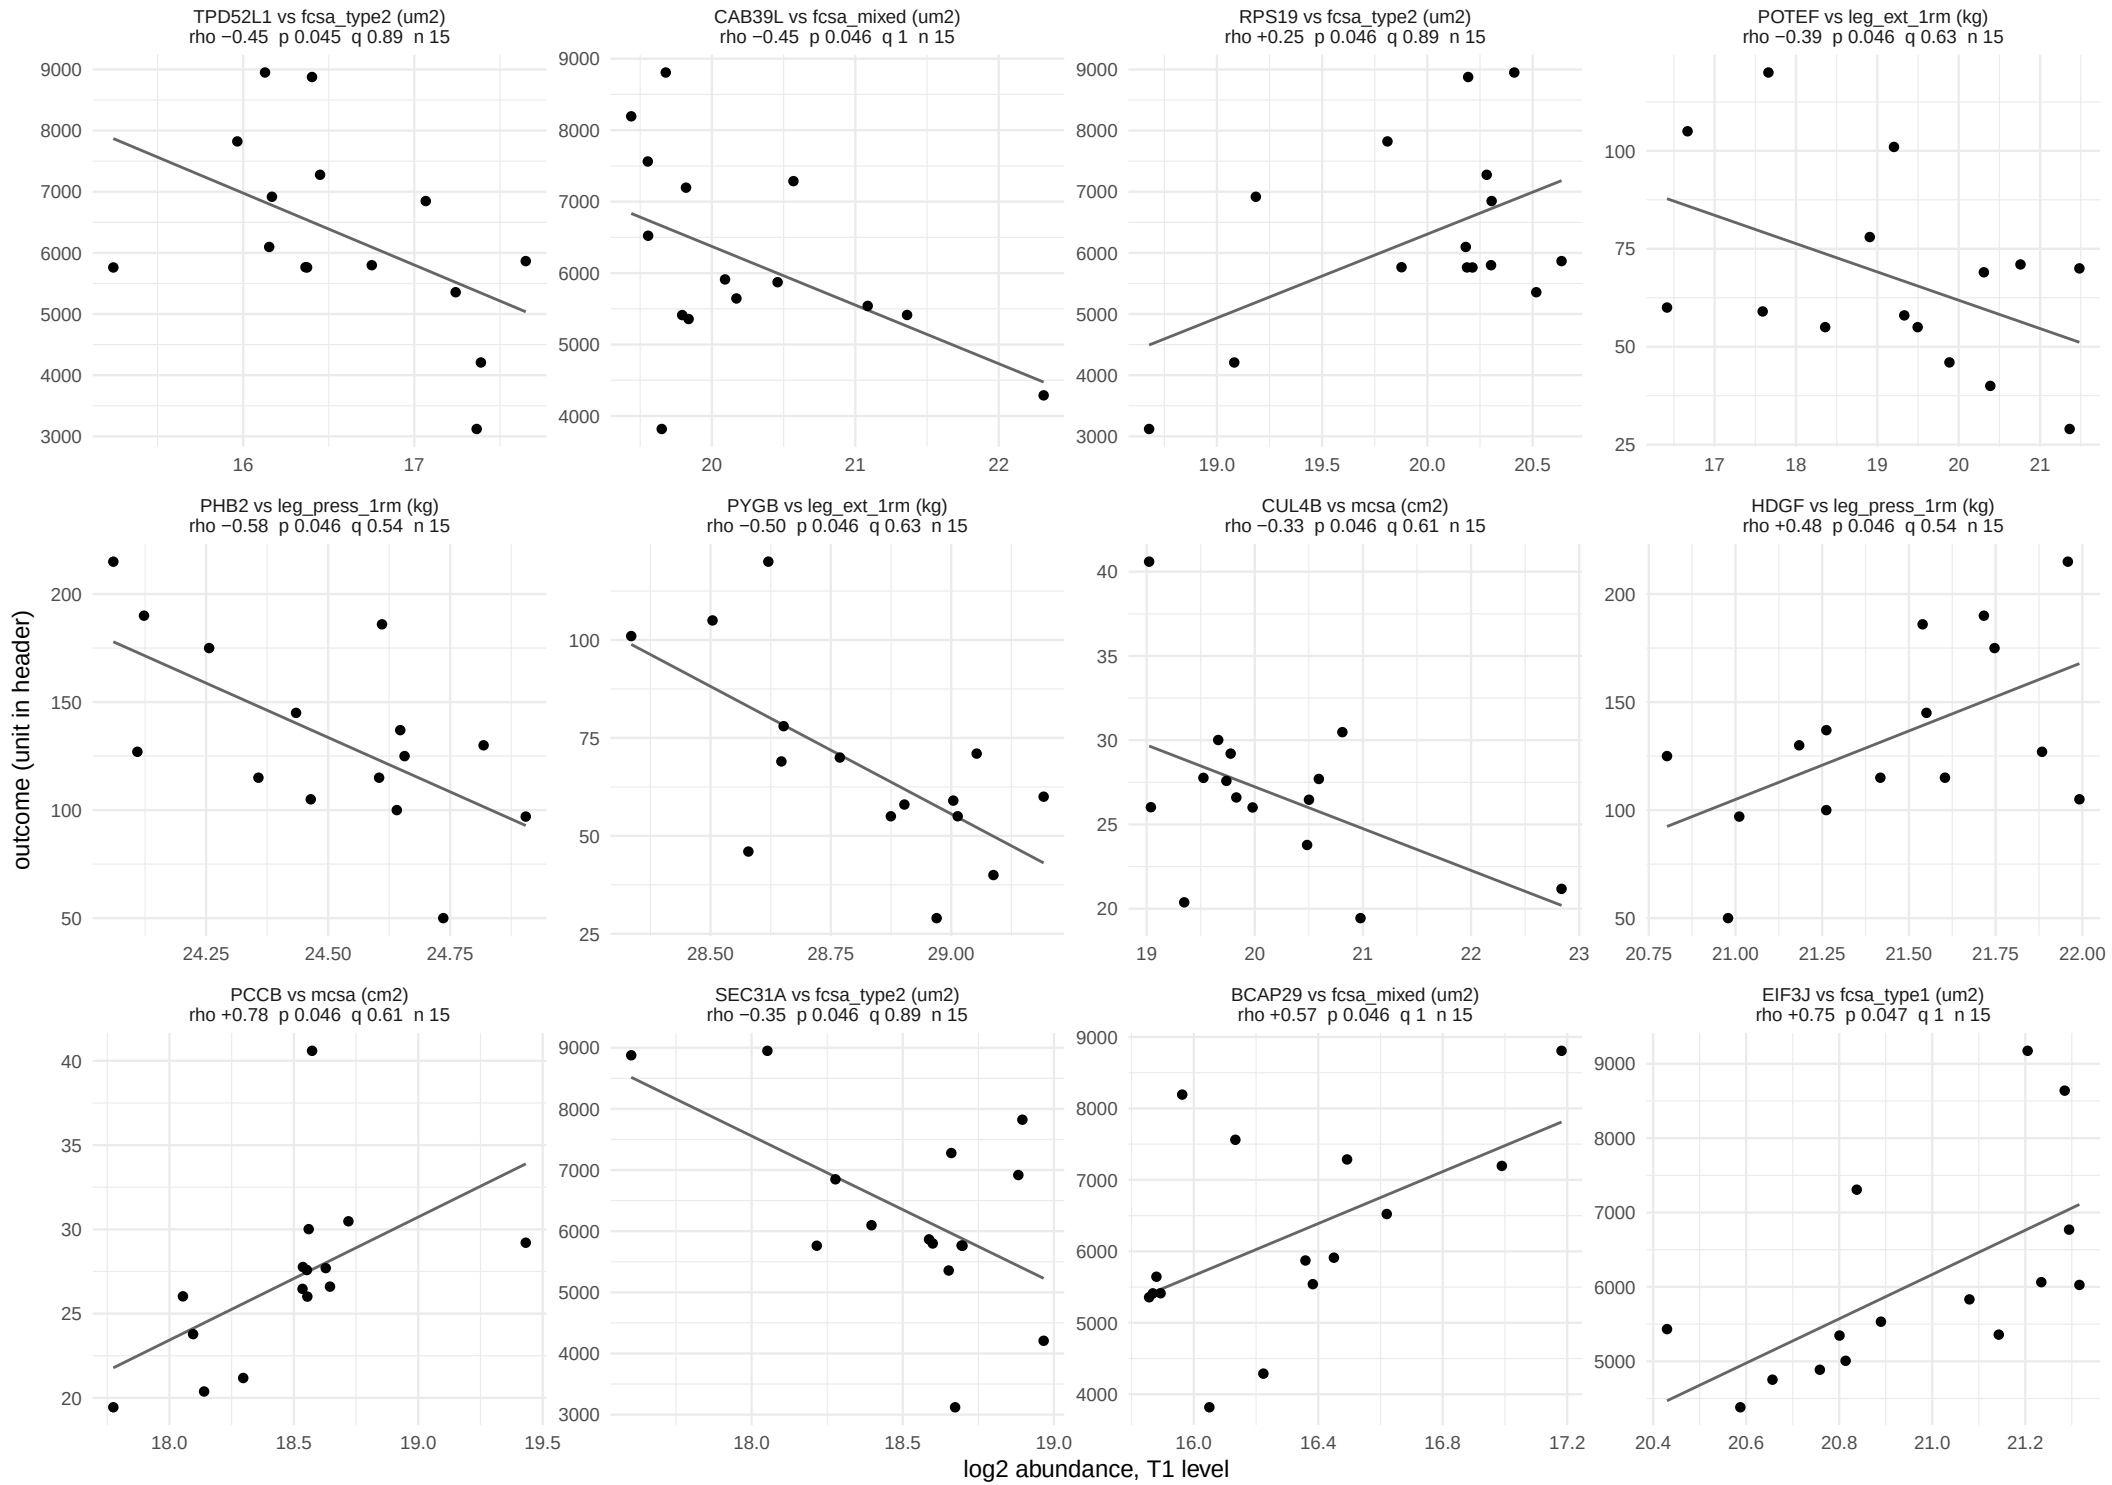

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline_level window


704 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 55 of 59.

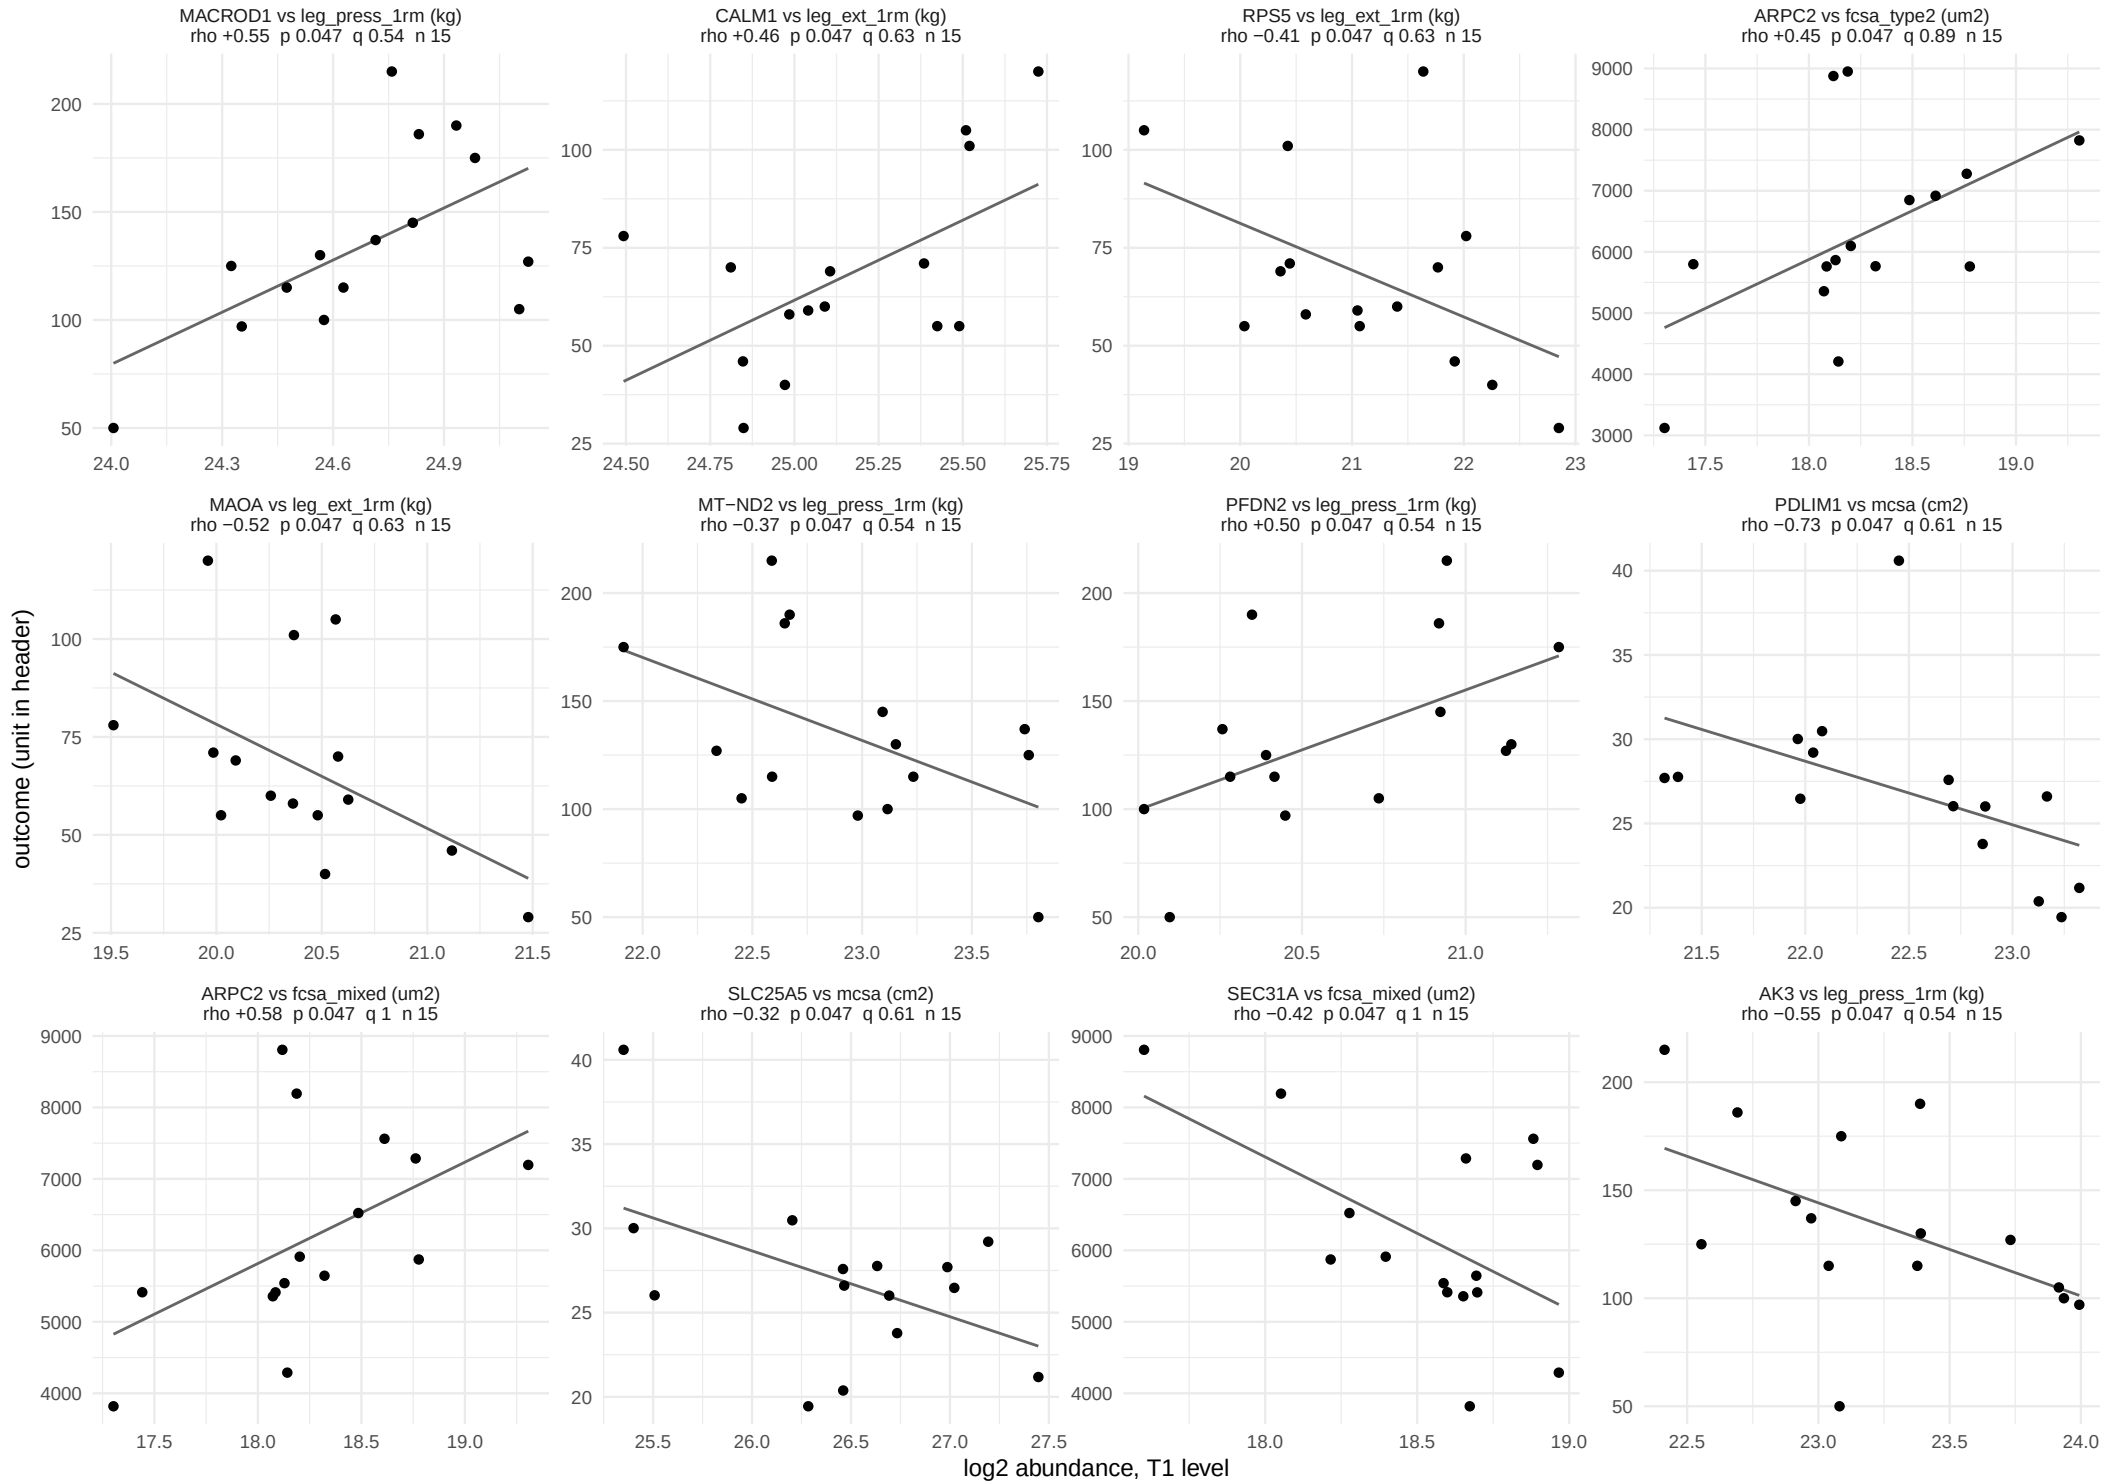

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline_level window


704 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 56 of 59.

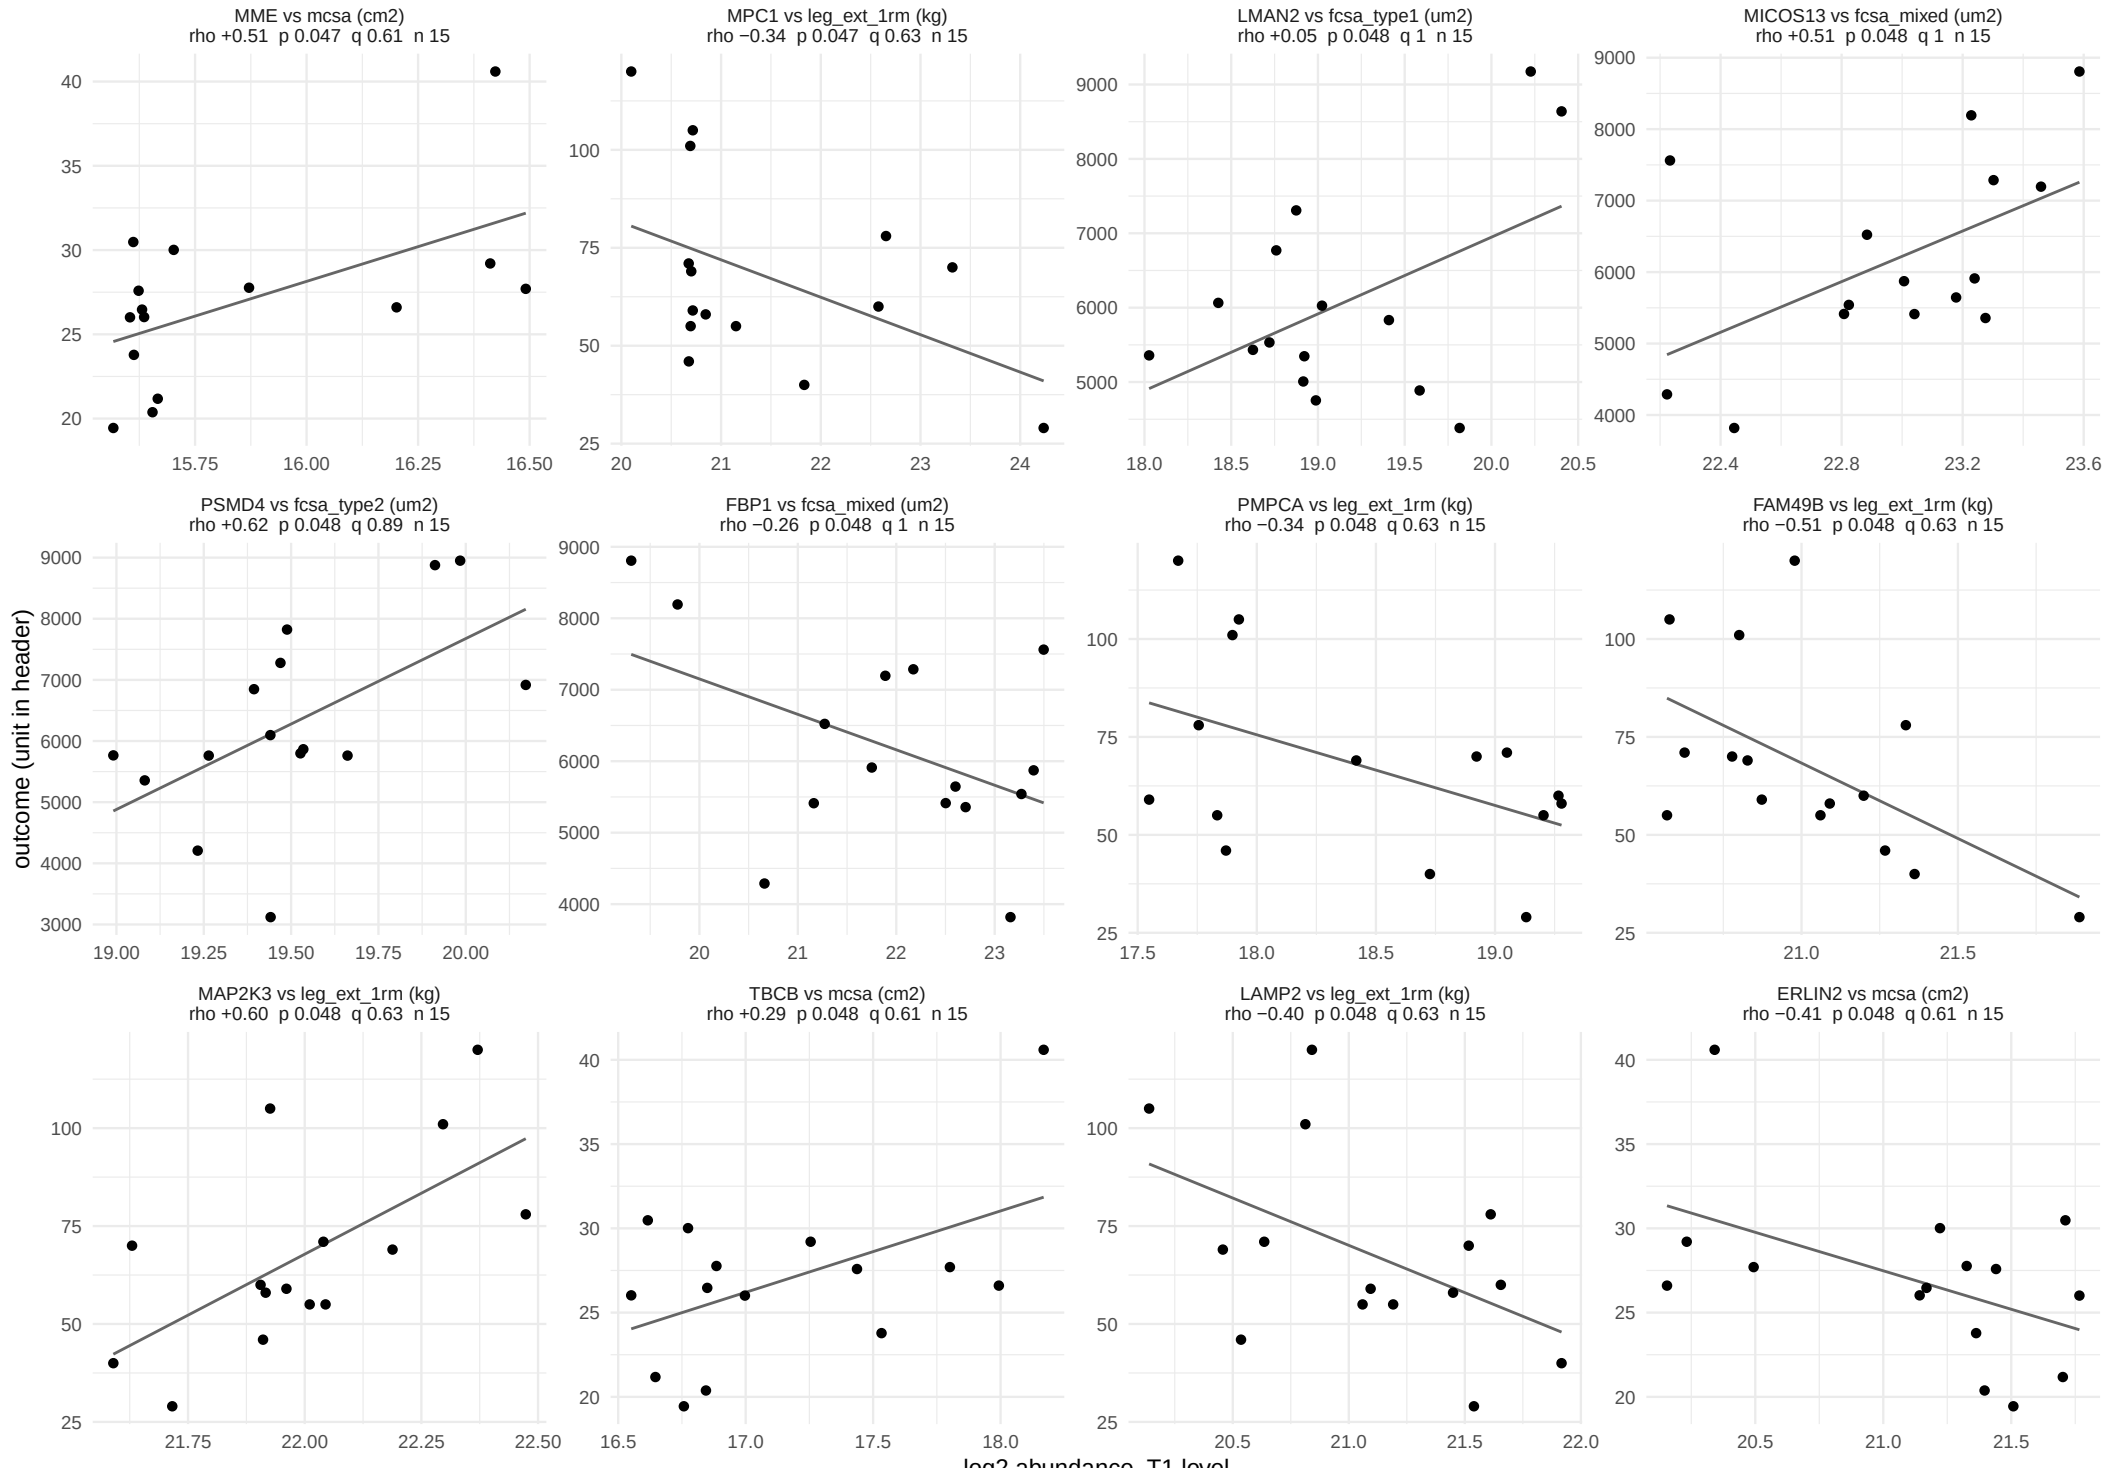

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline_level window


704 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 57 of 59.

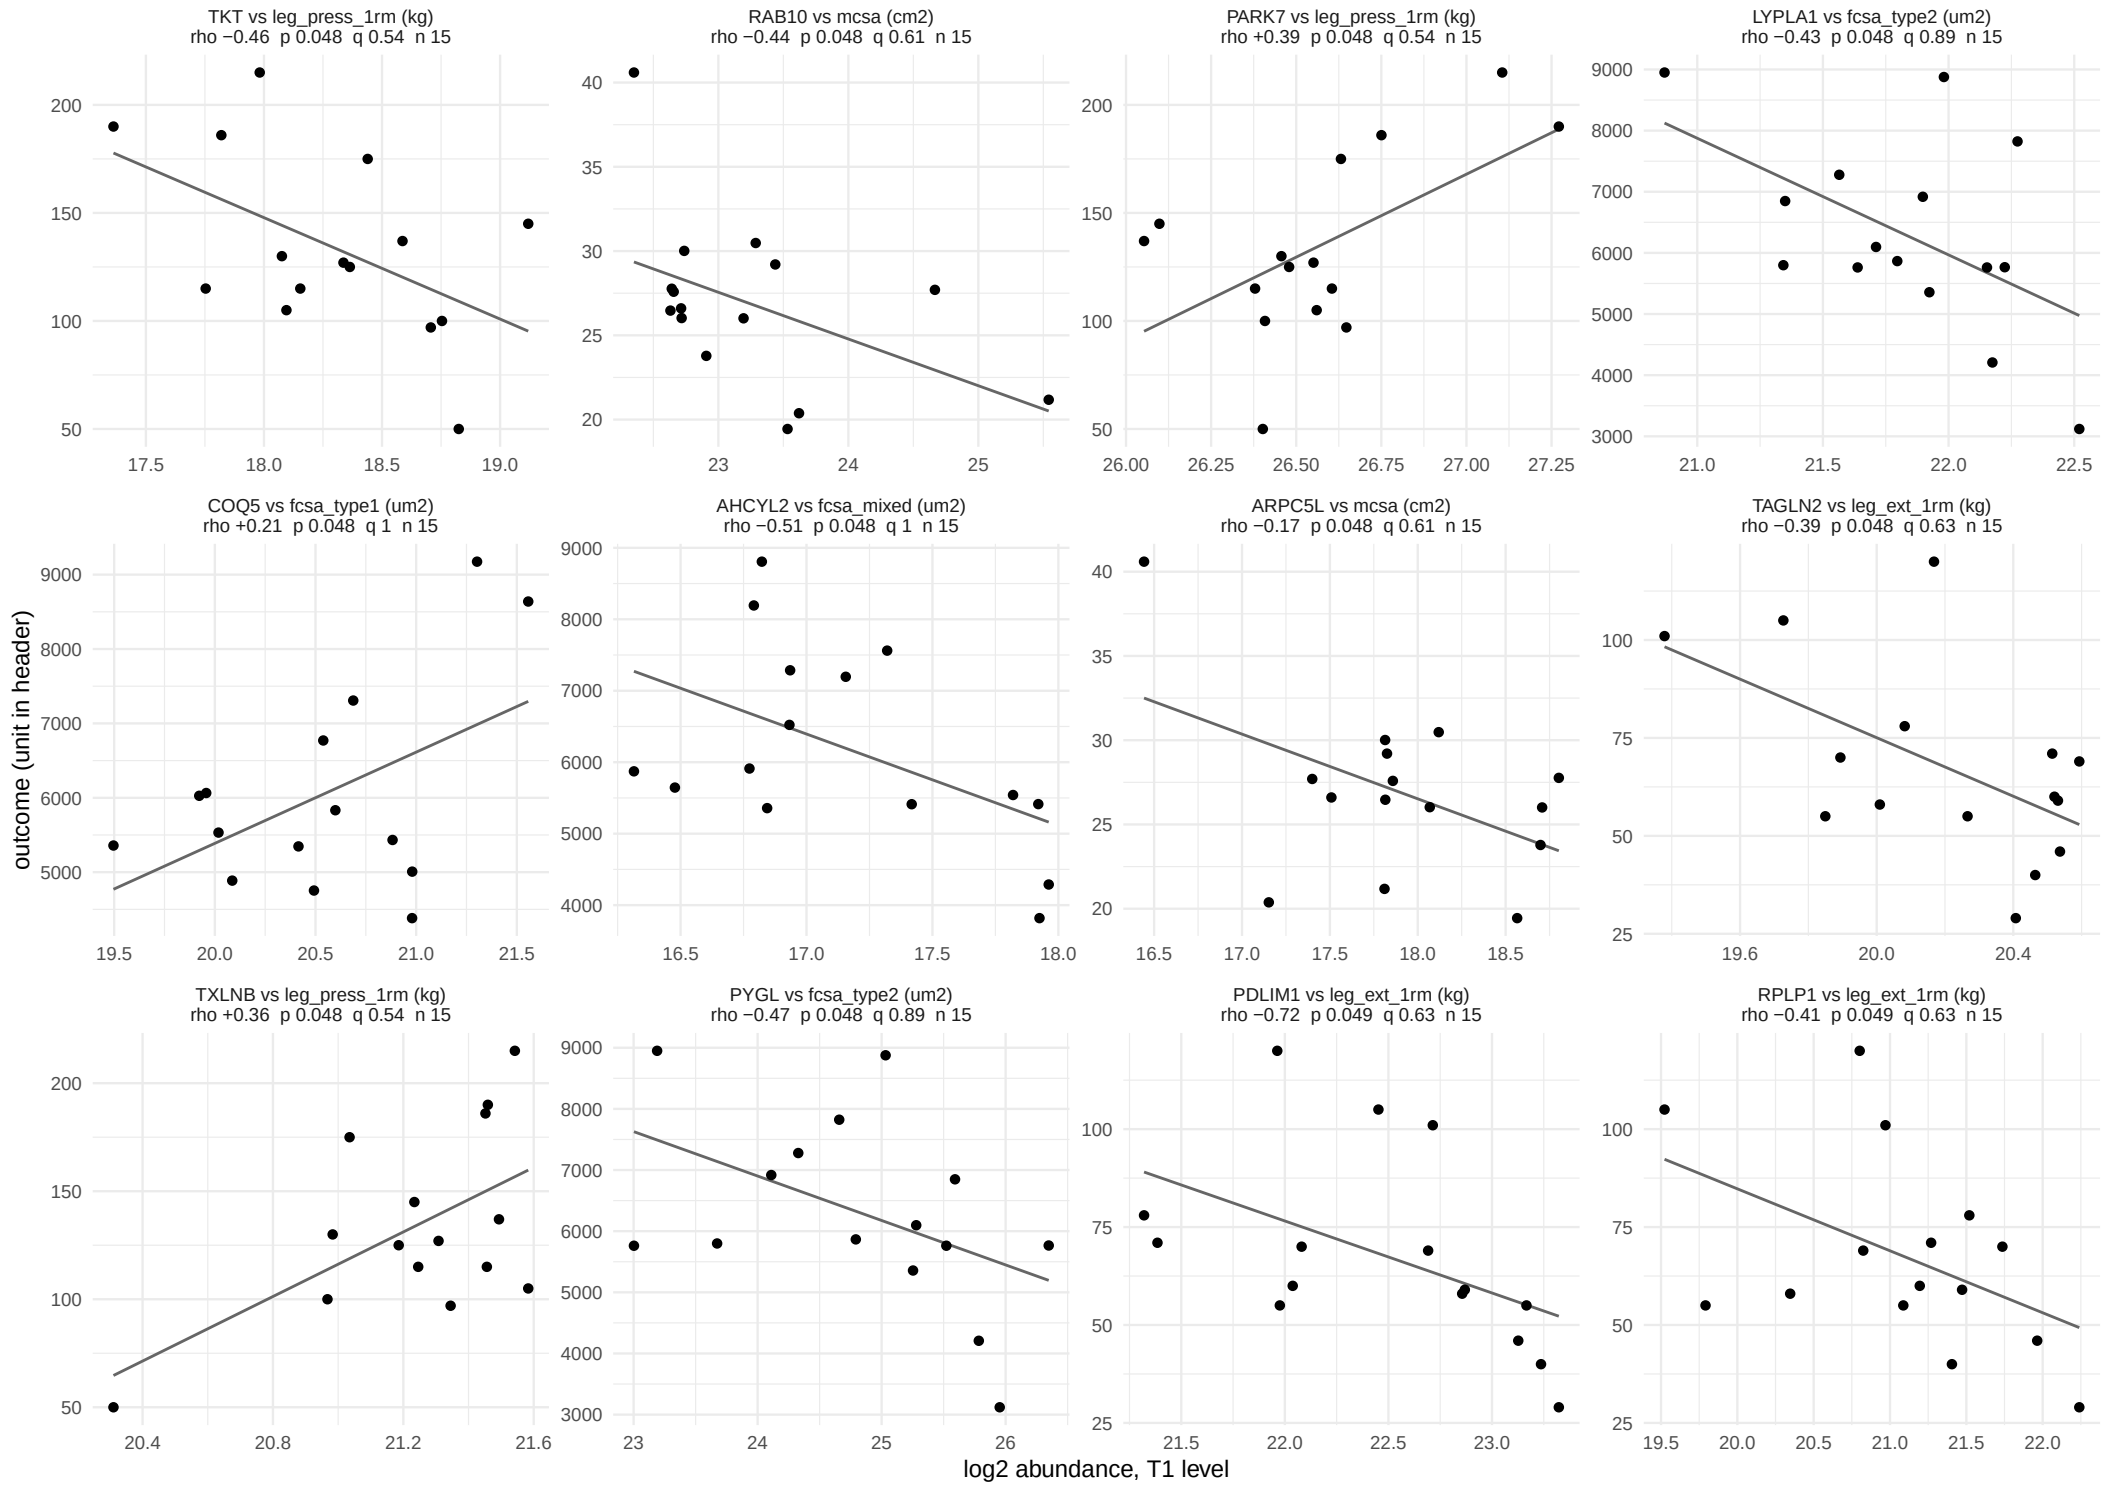

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline_level window


704 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 58 of 59.

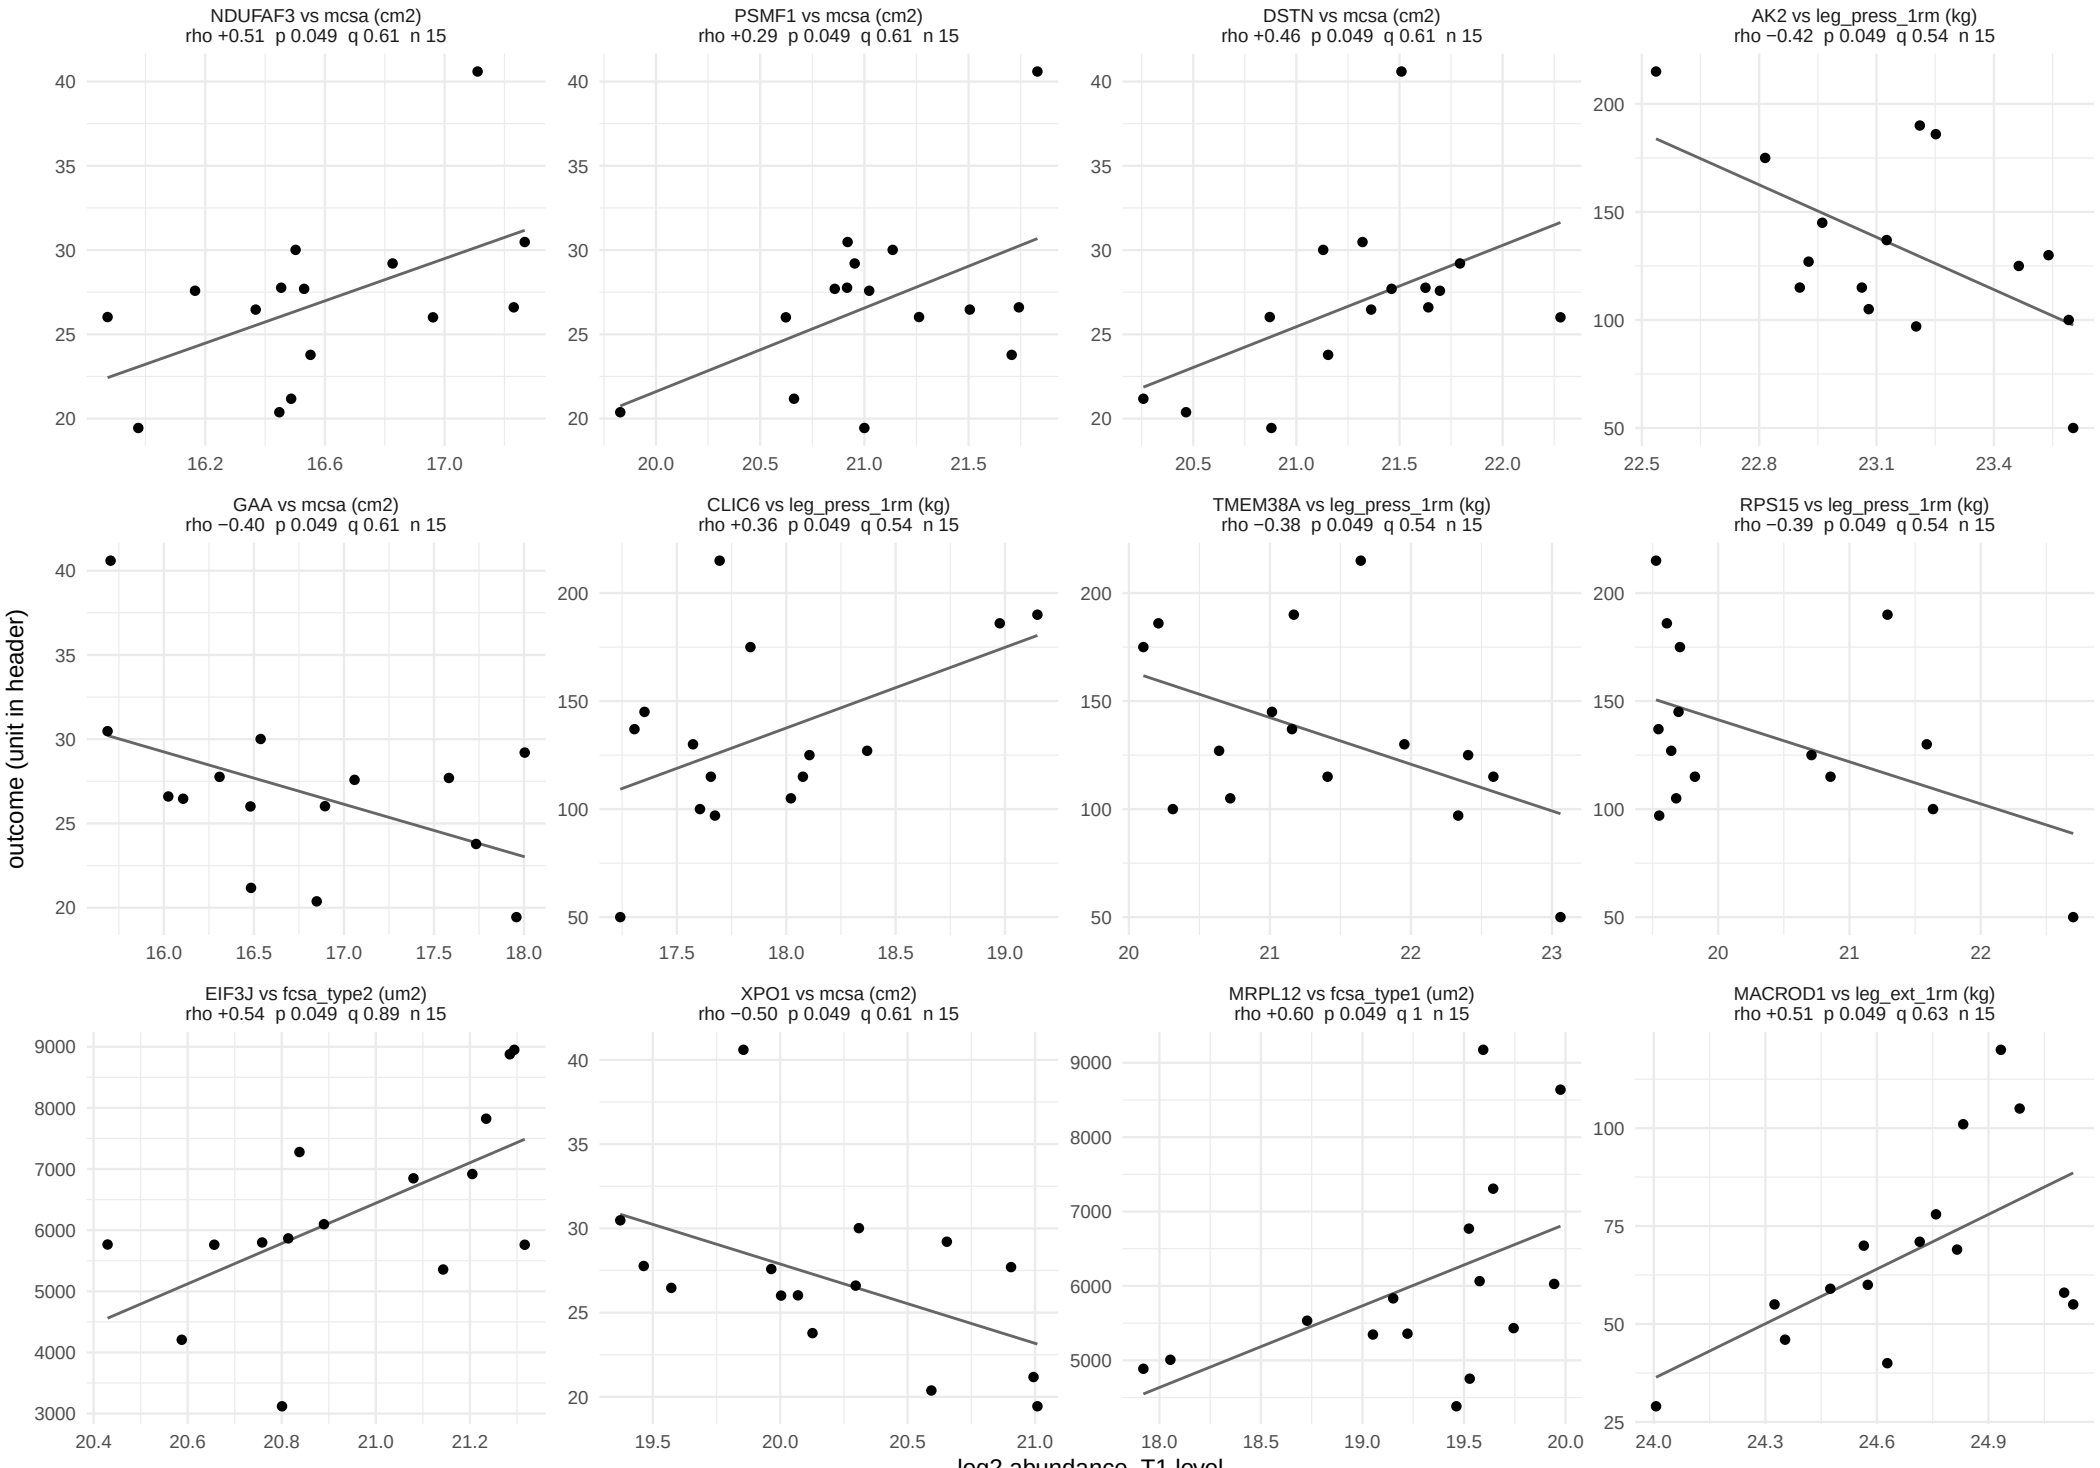

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, baseline_level window


704 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 59 of 59.

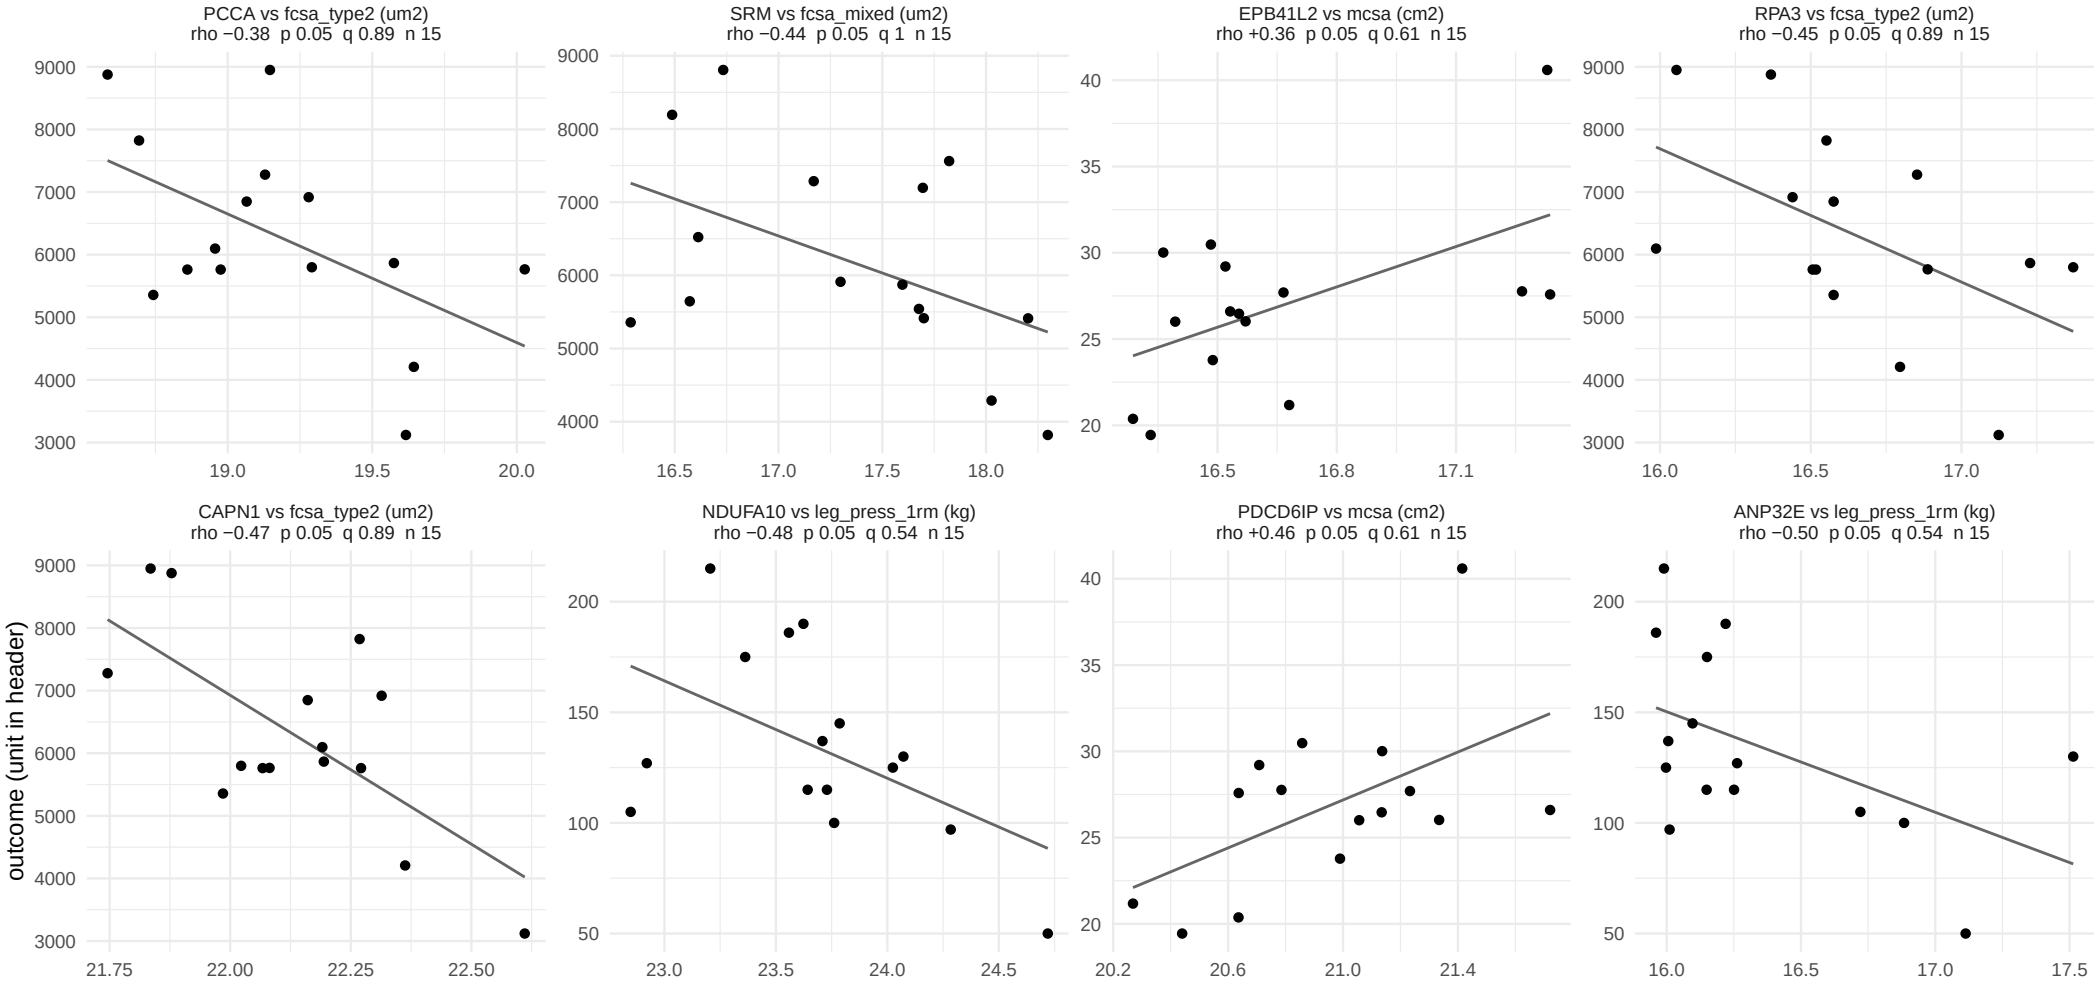

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, post_level window


555 of 11400 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 1 of 47.

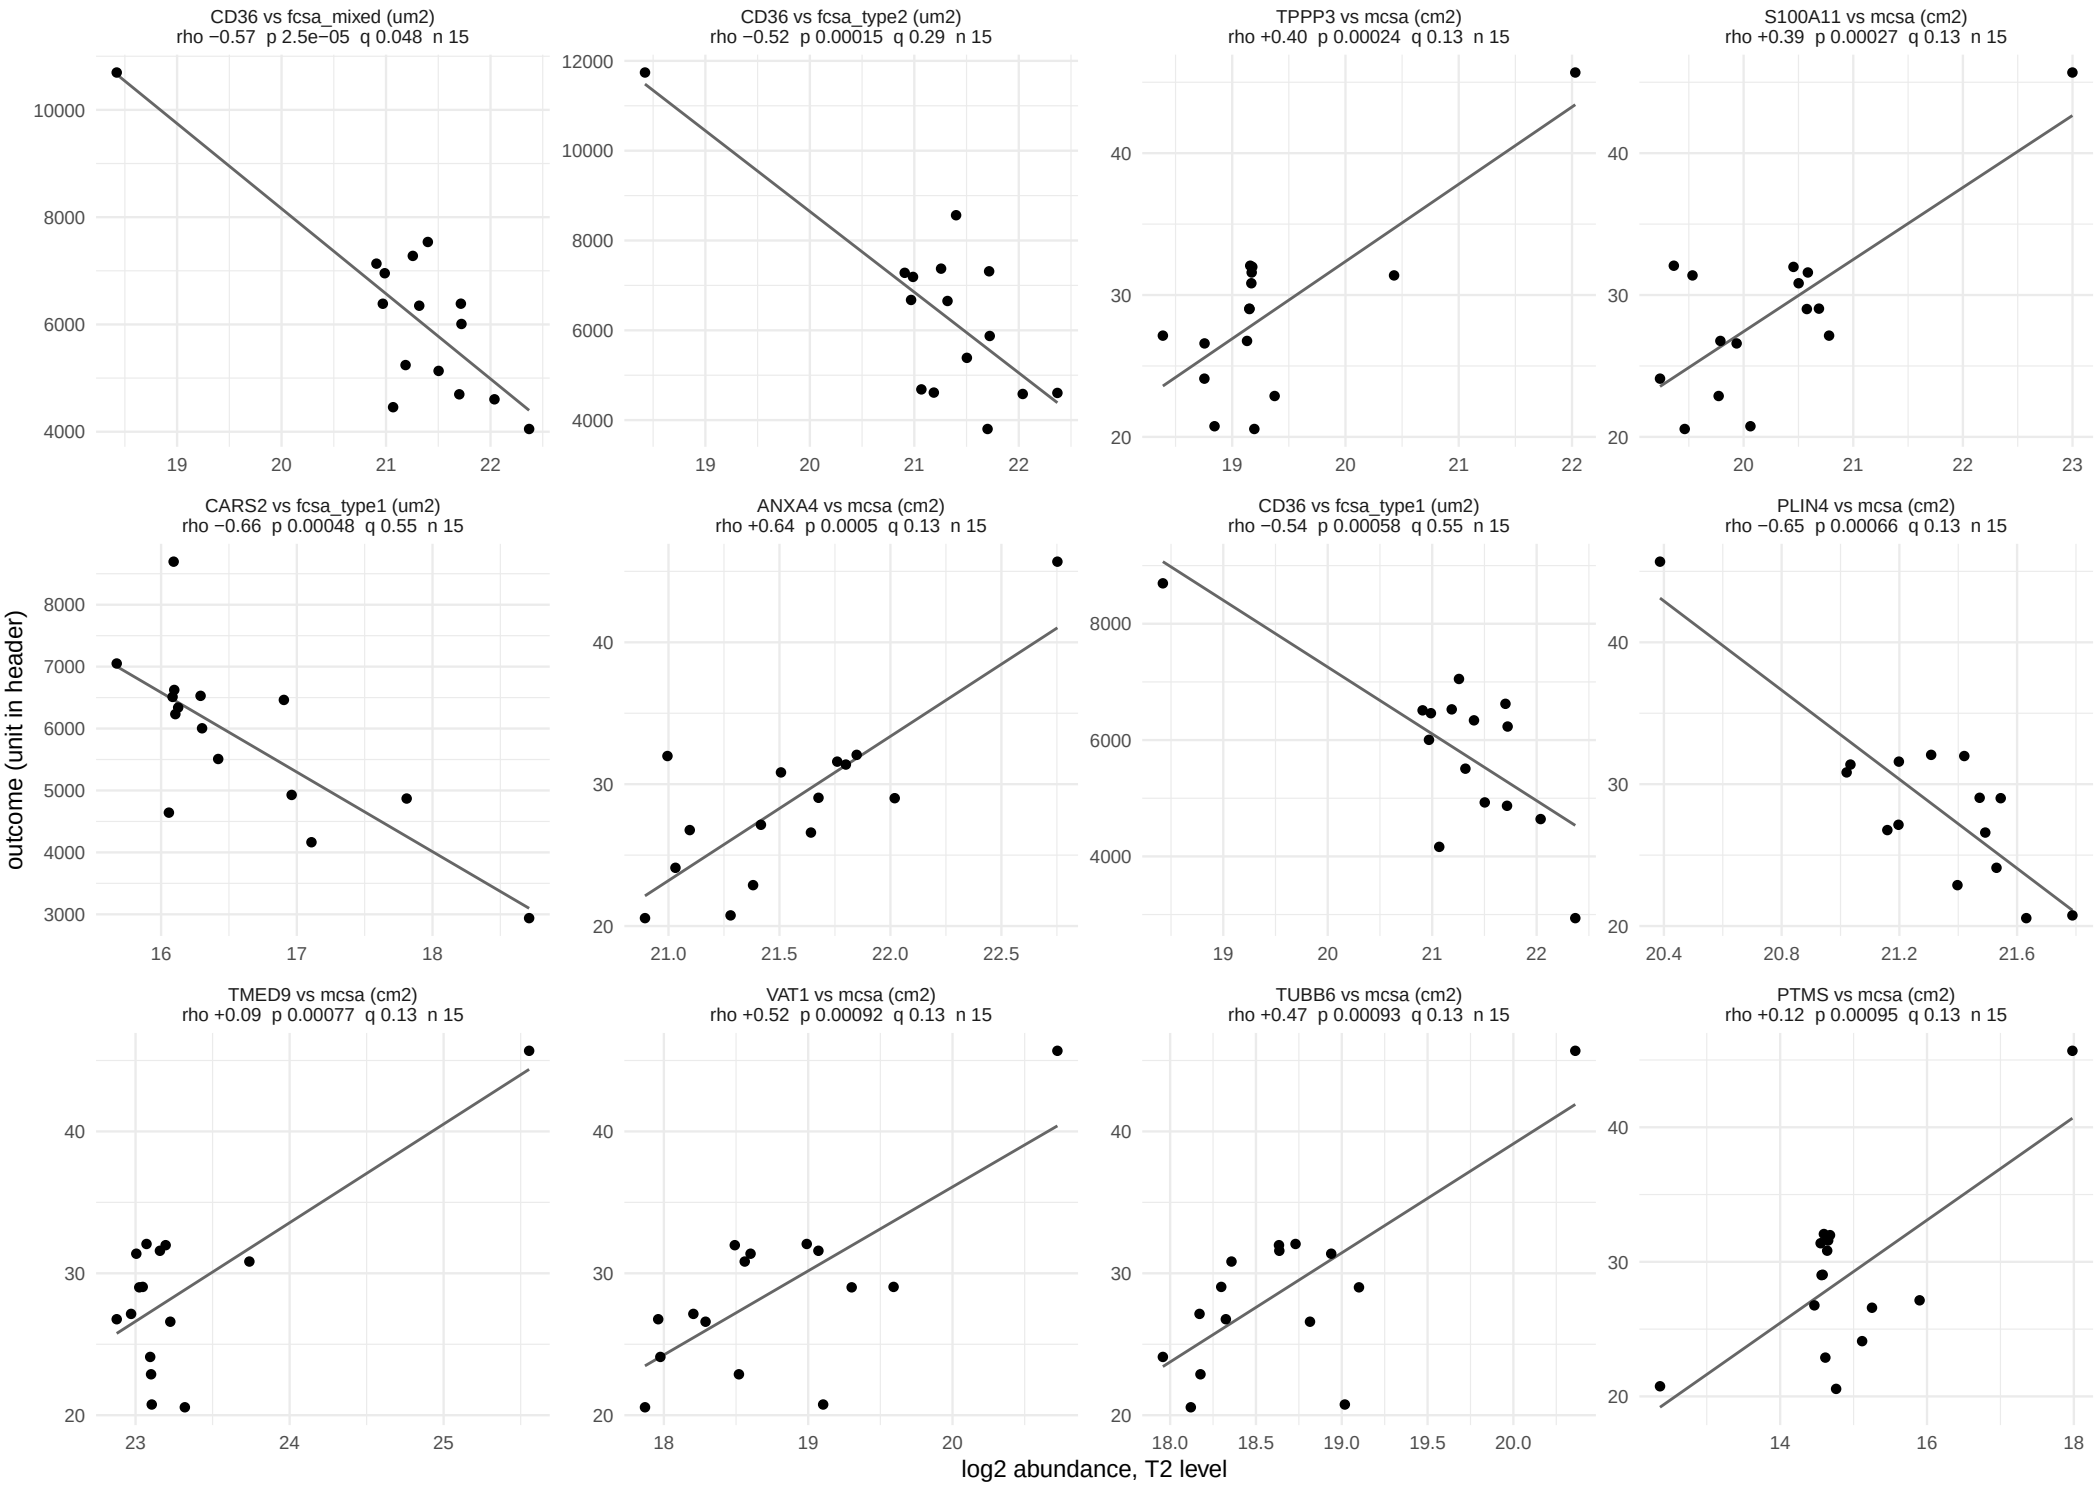

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, post_level window


555 of 11400 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 2 of 47.

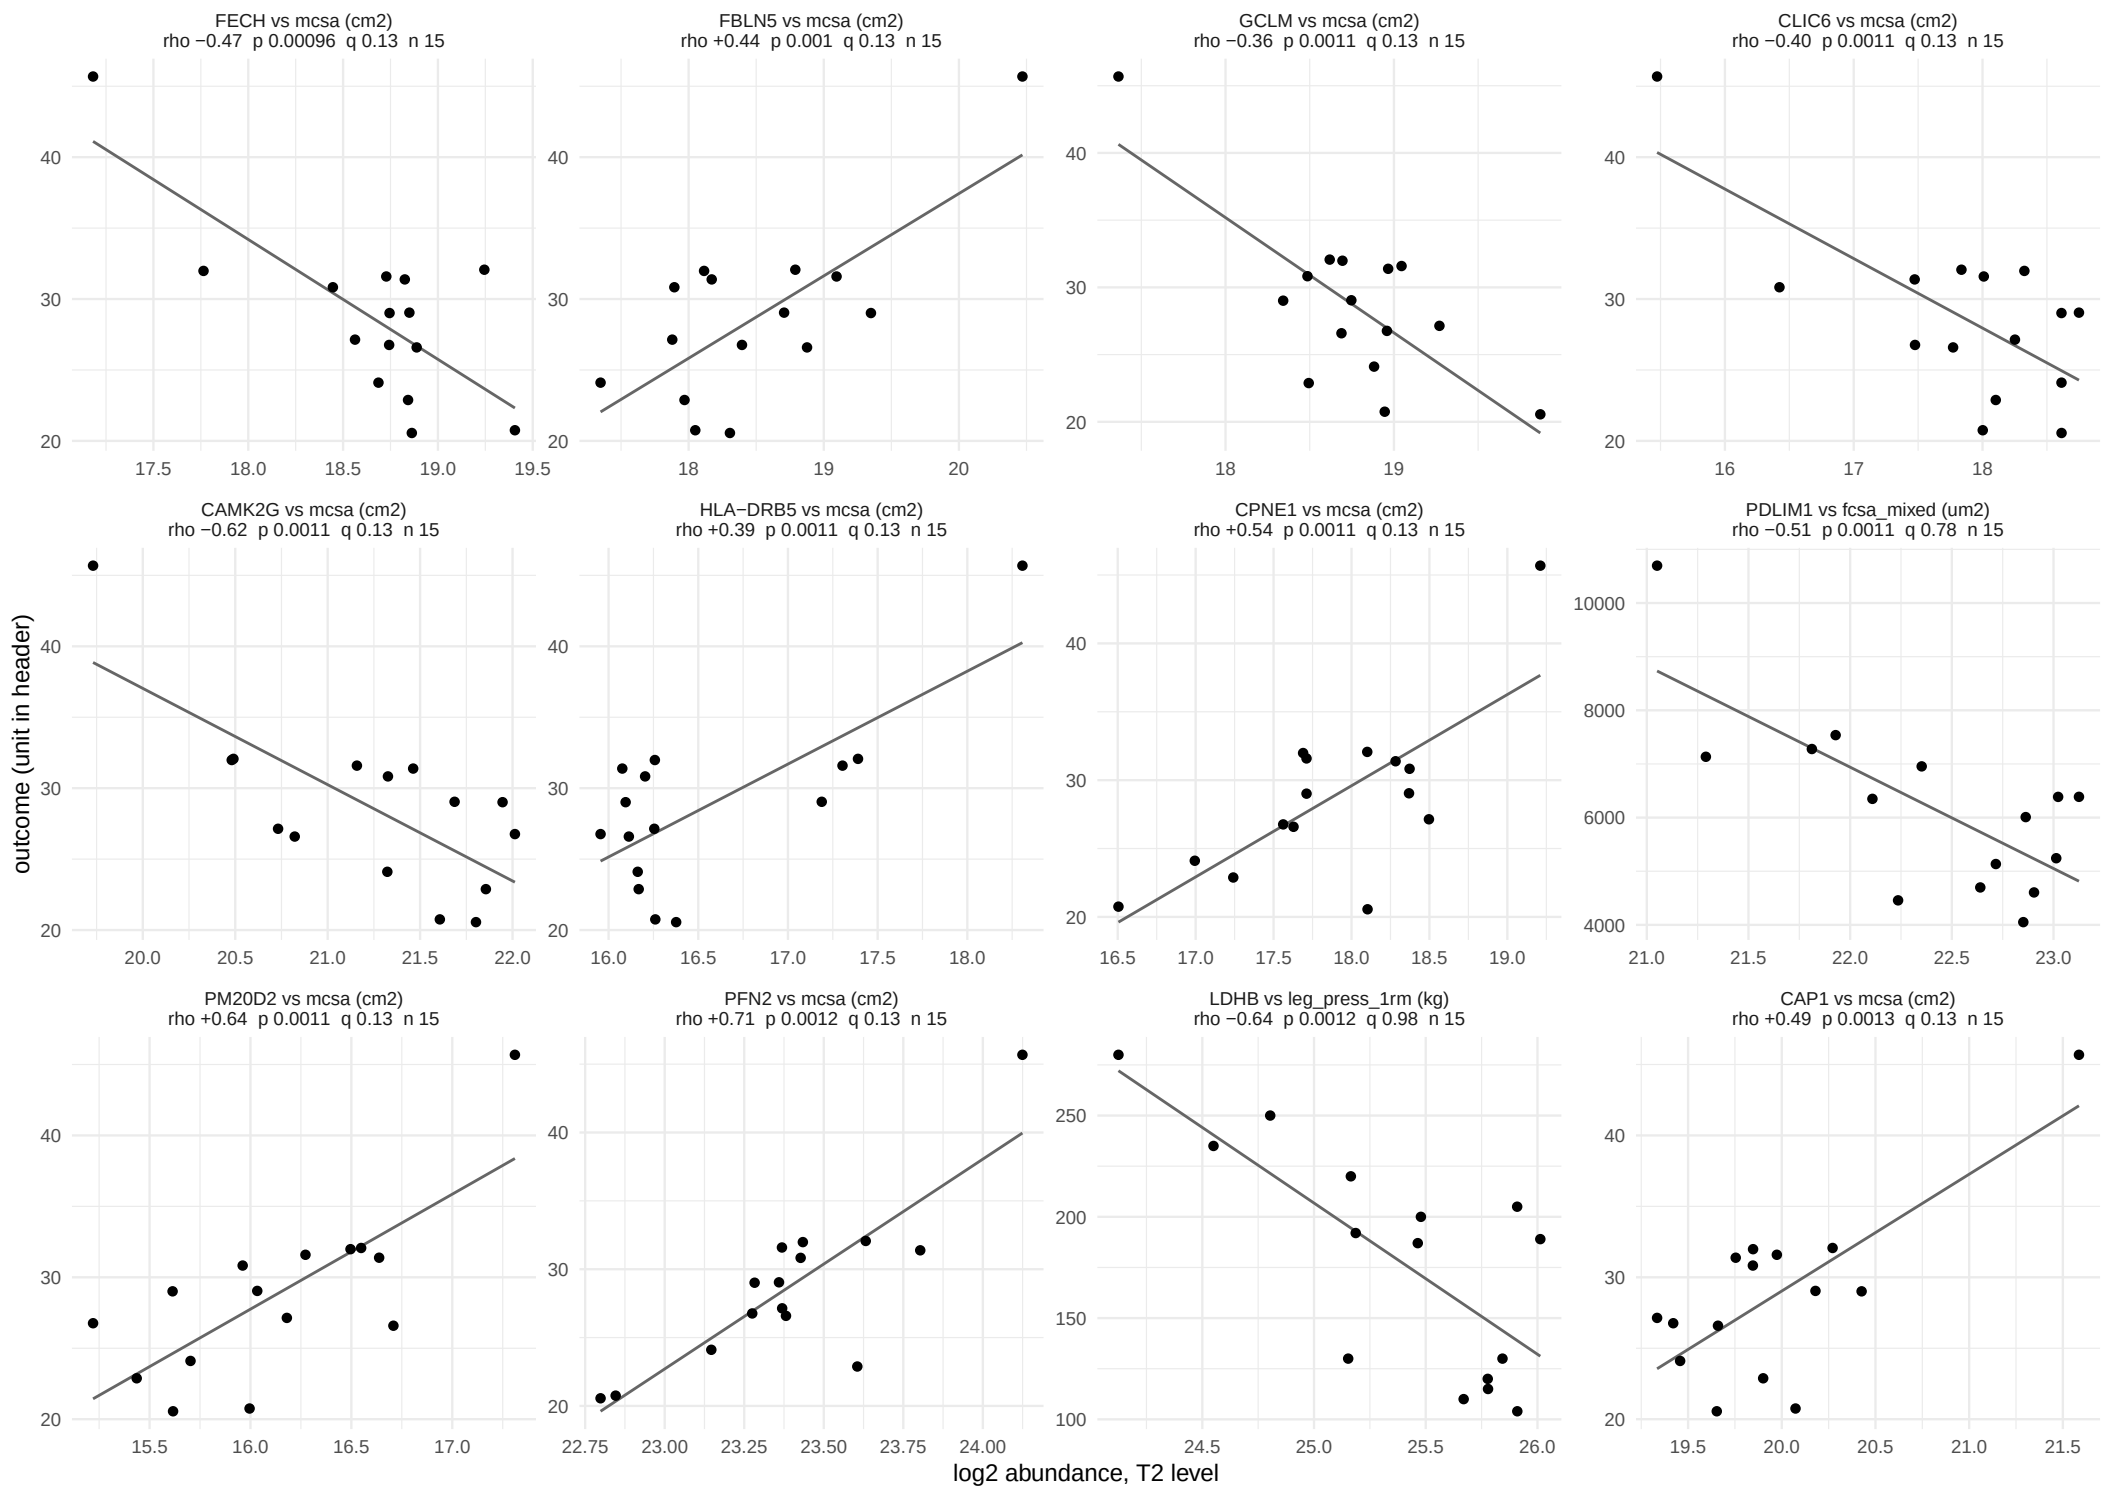

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, post_level window


555 of 11400 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 3 of 47.

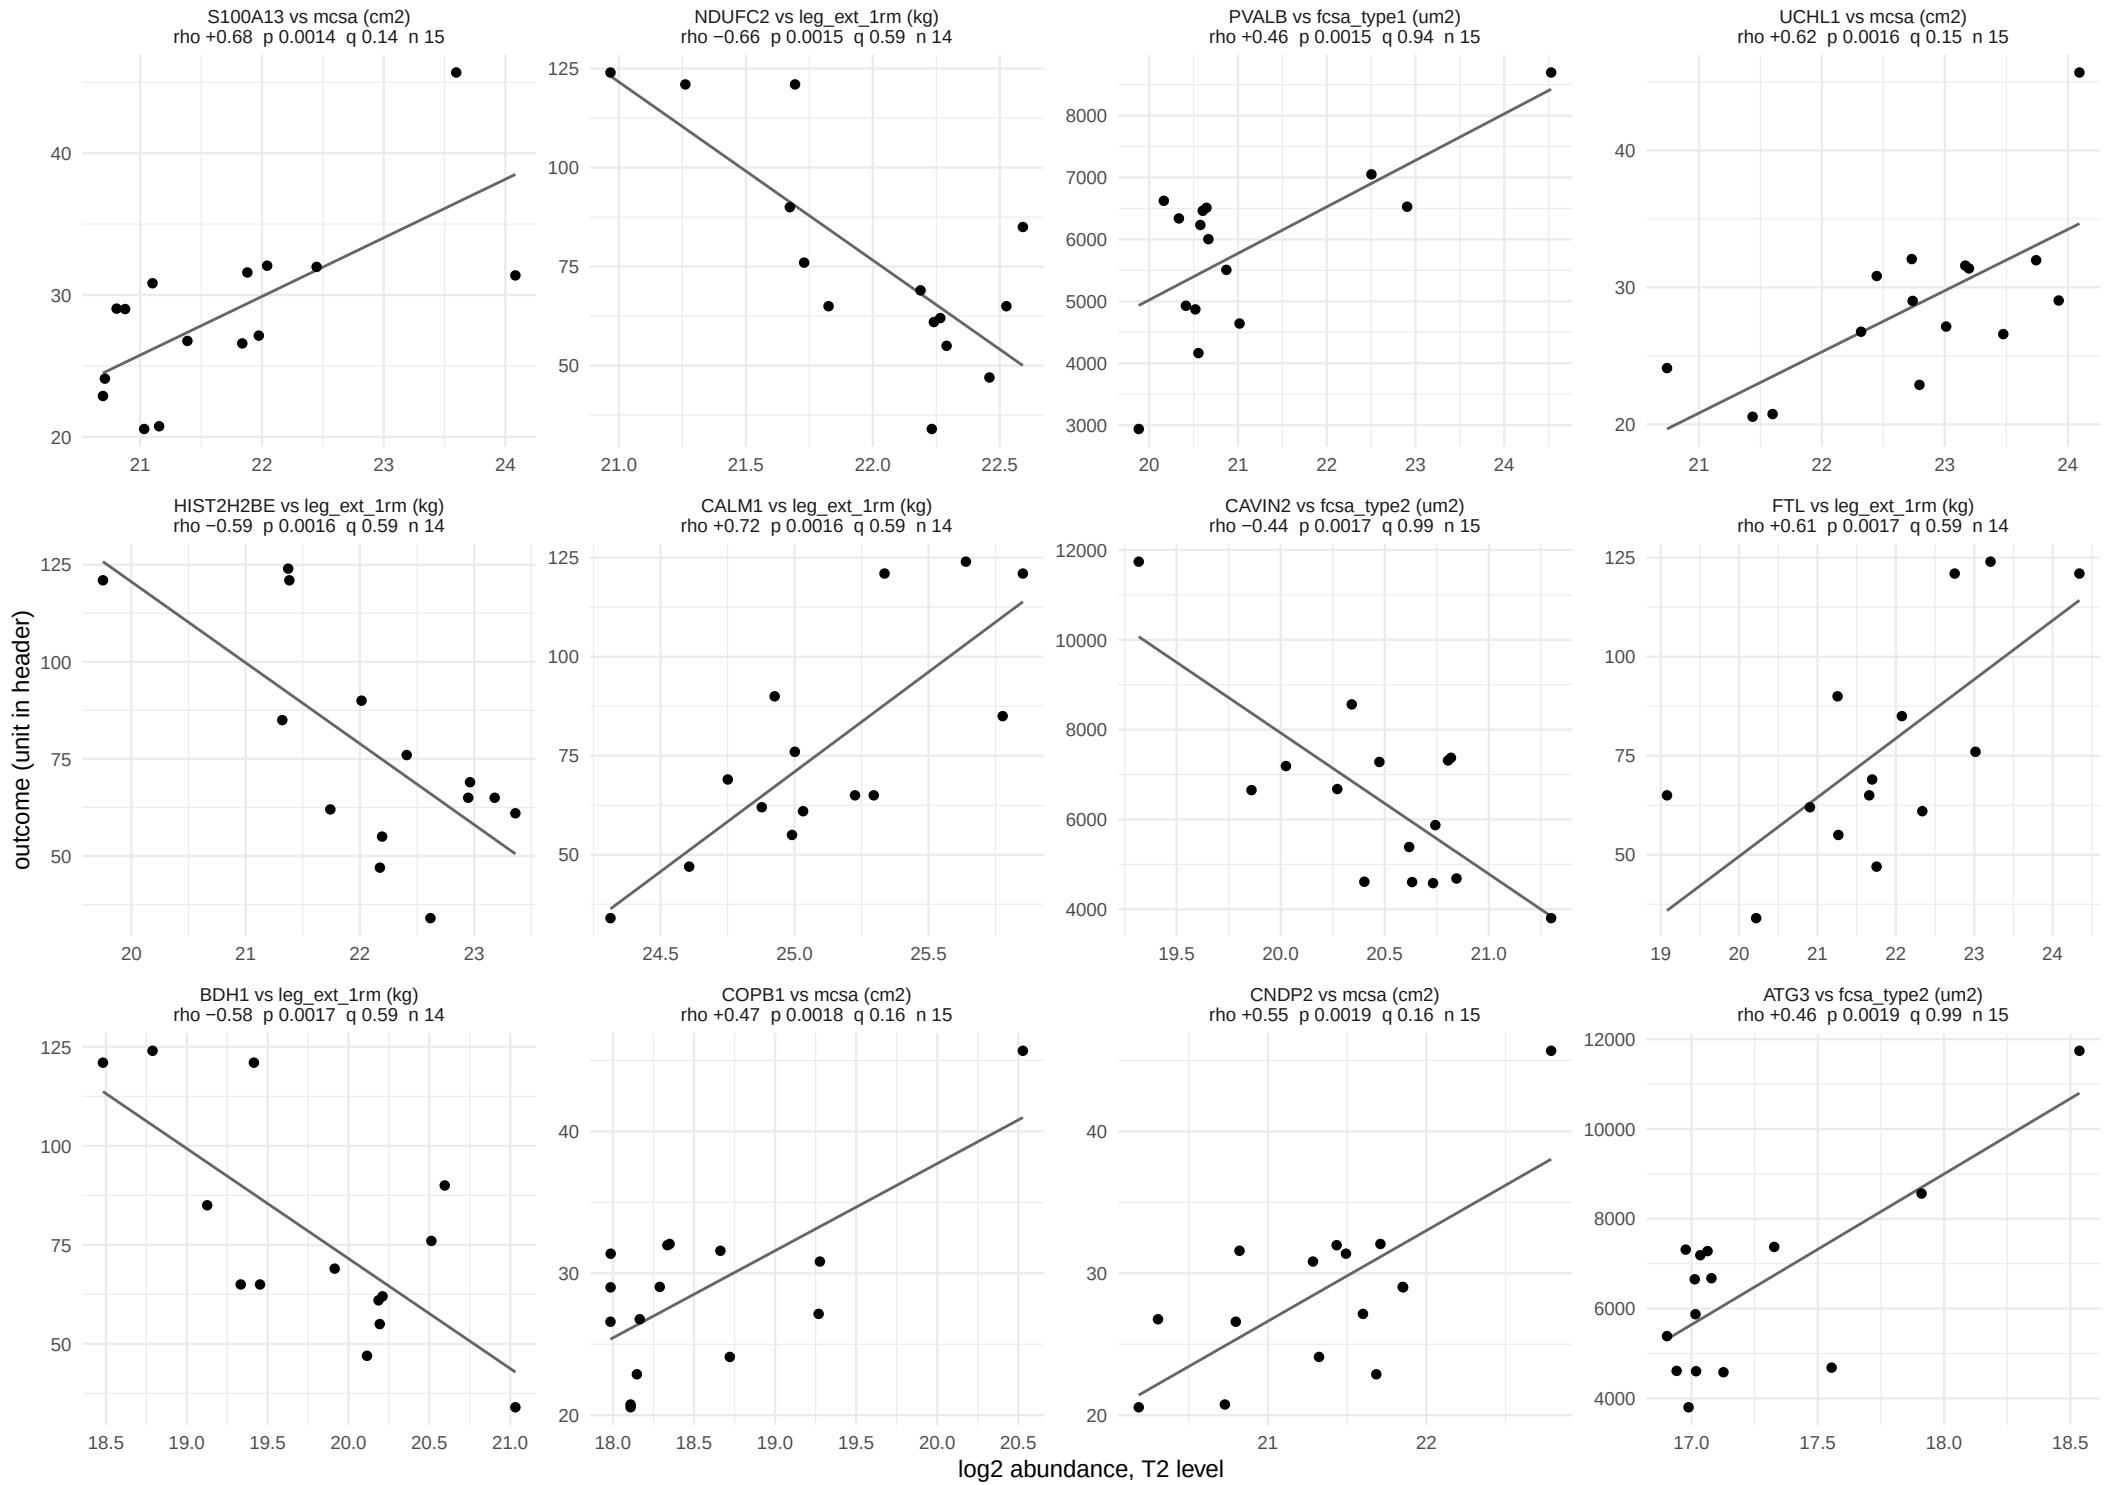

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, post_level window


555 of 11400 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 4 of 47.

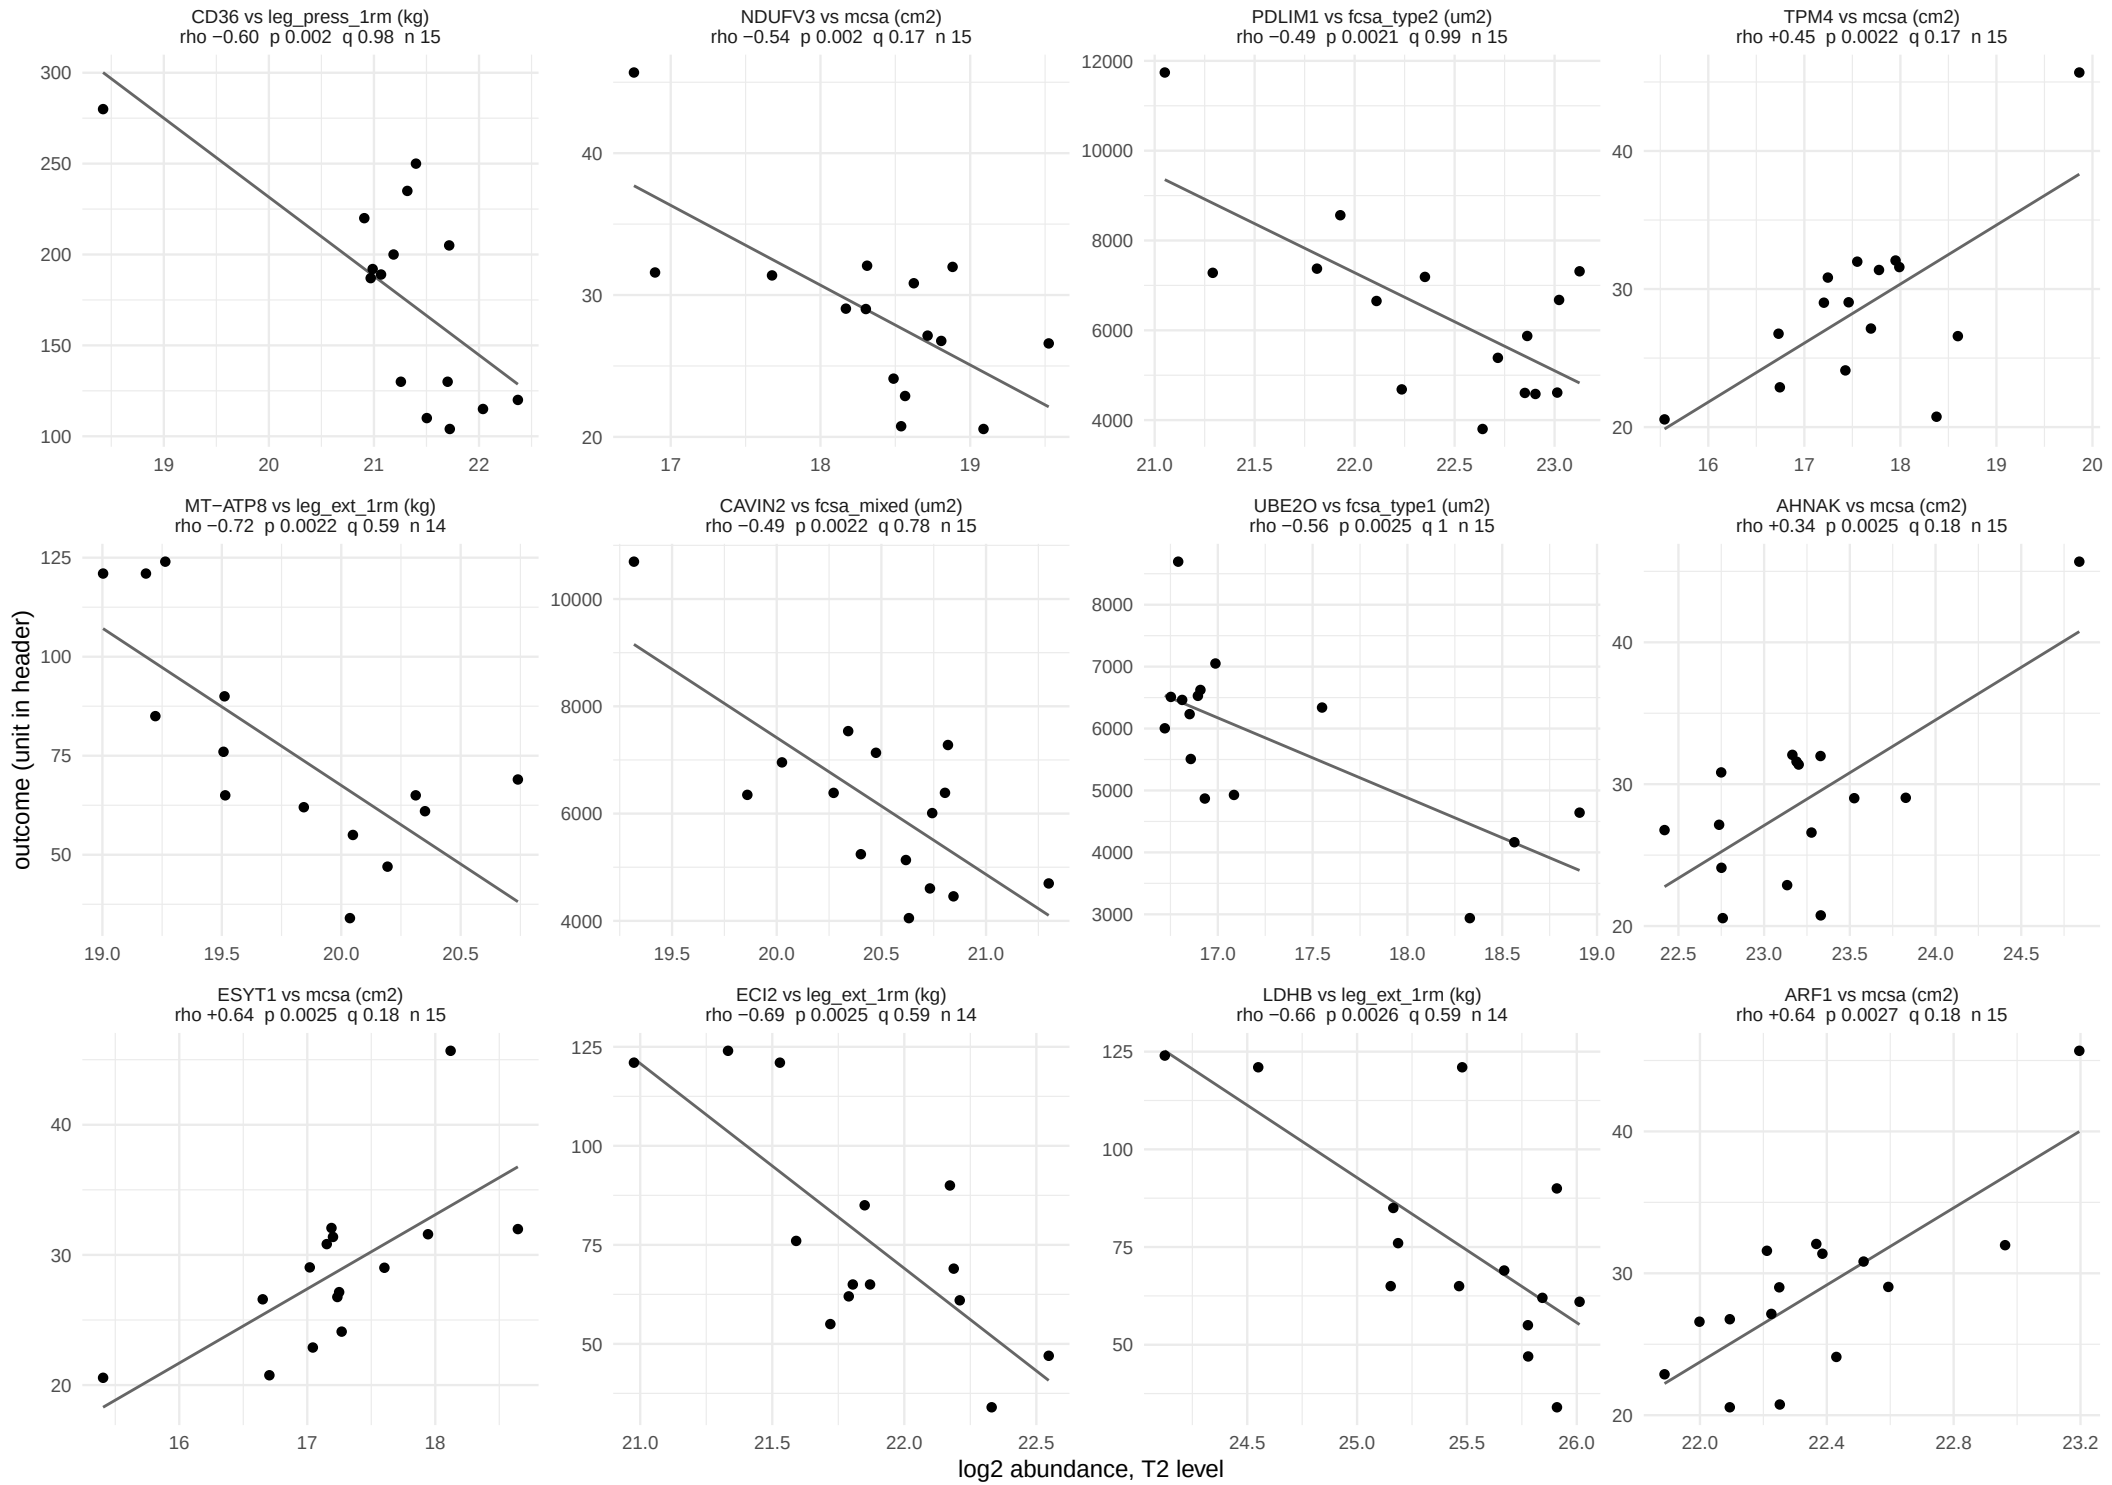

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, post_level window


555 of 11400 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 5 of 47.

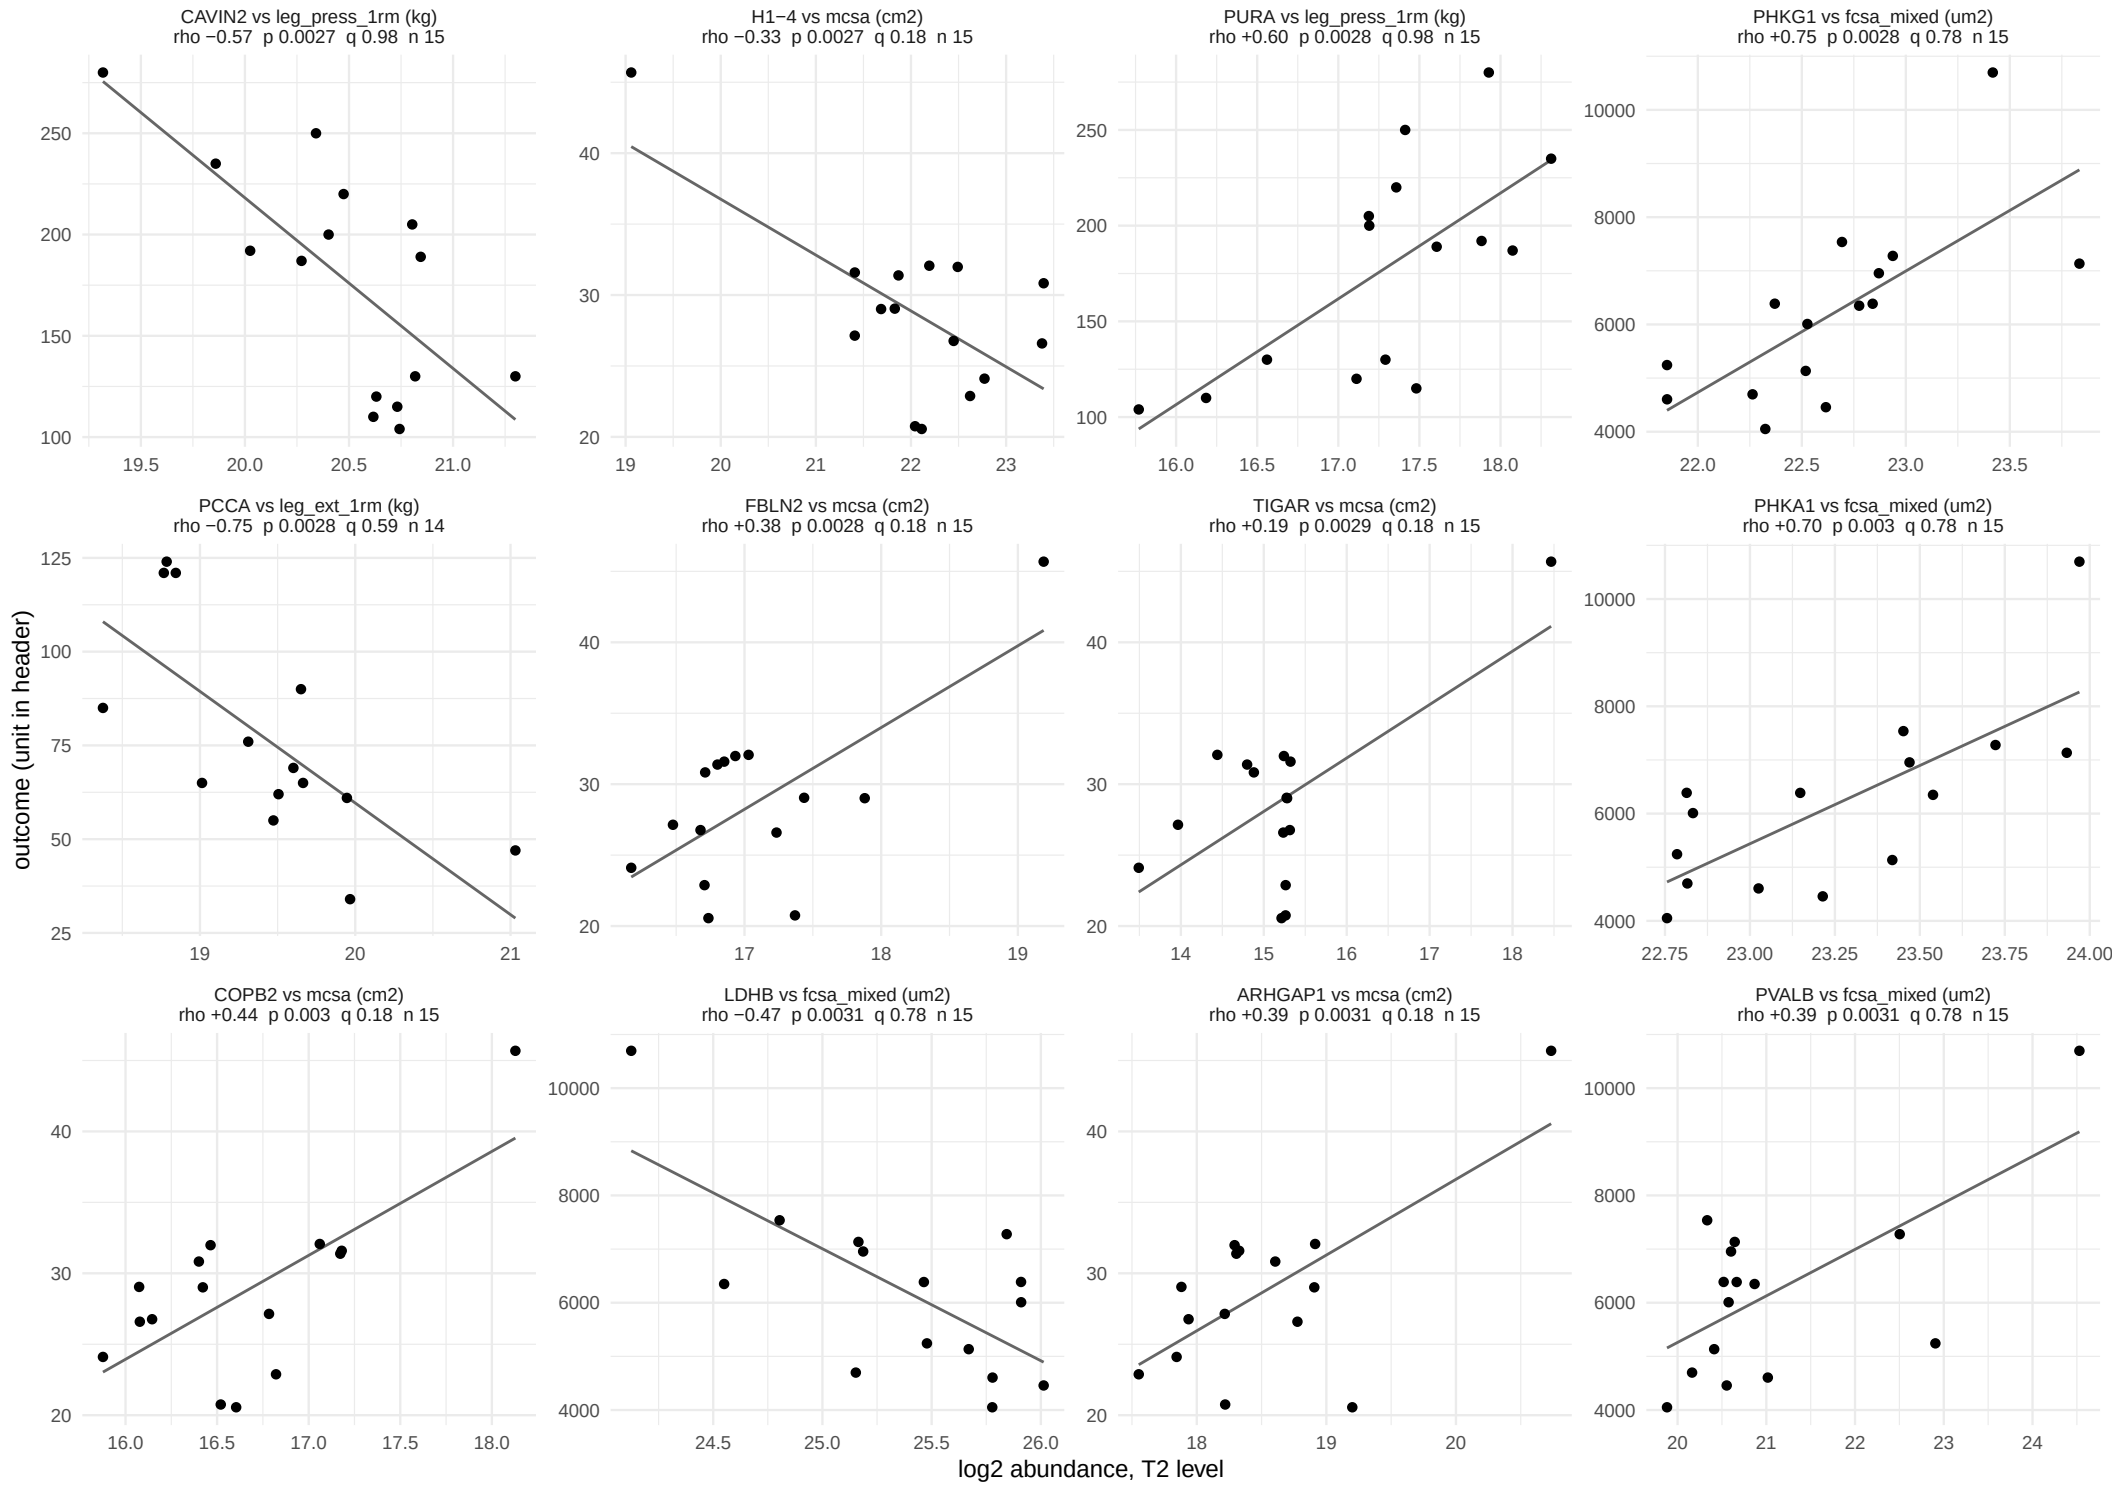

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, post_level window


555 of 11400 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 6 of 47.

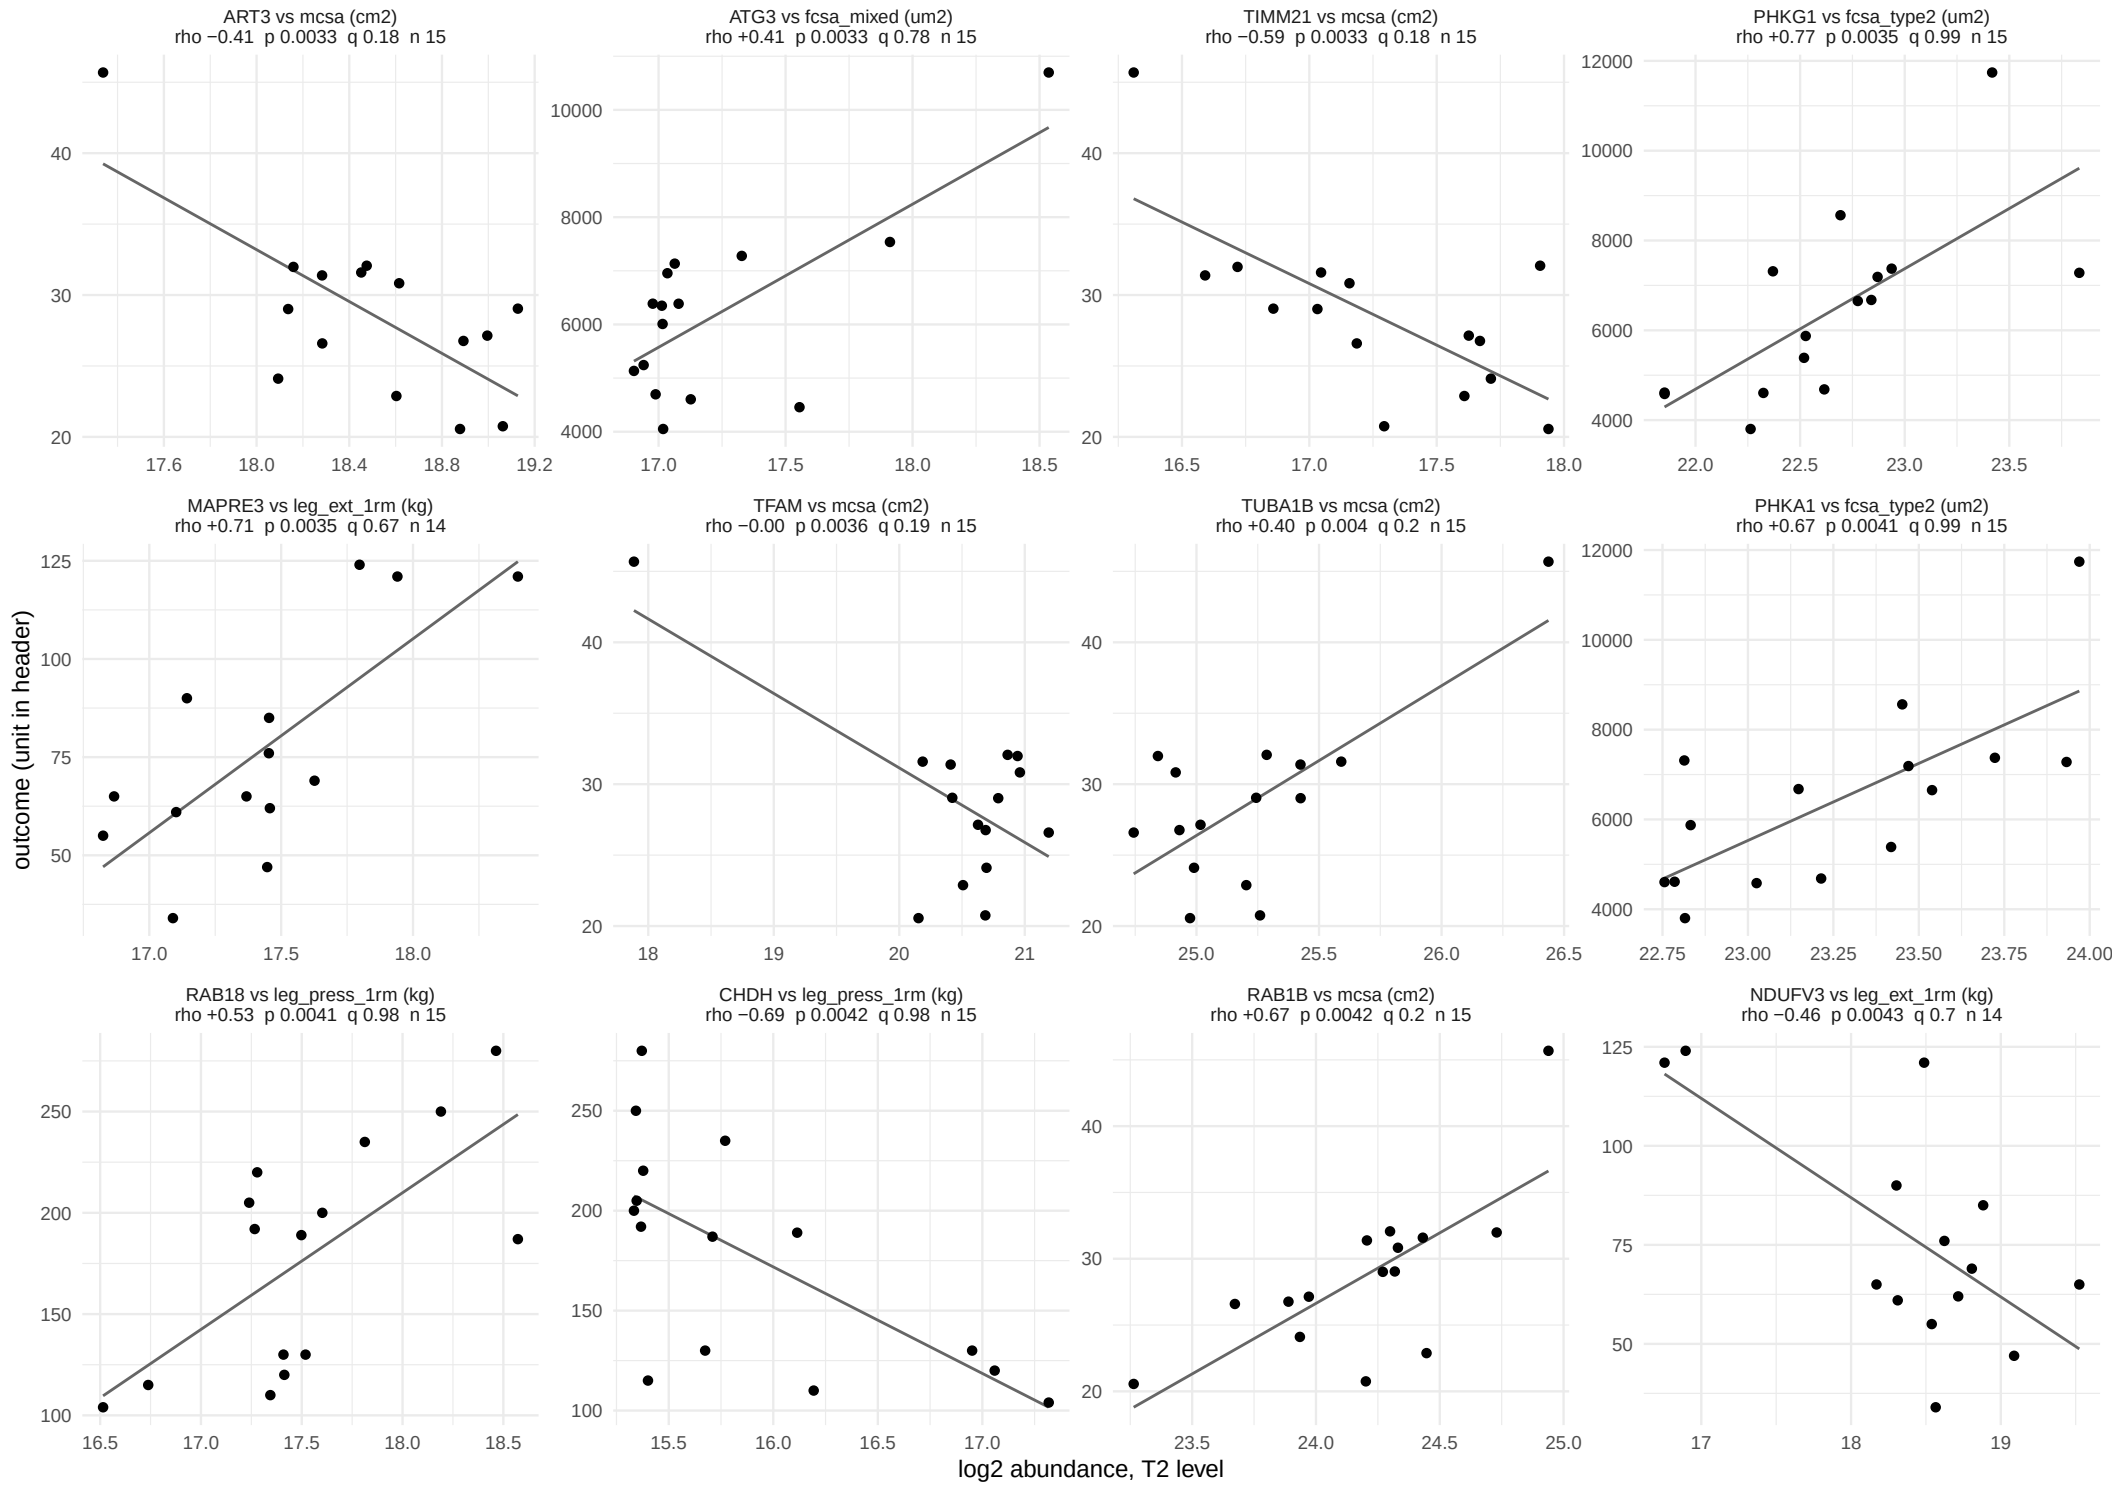

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, post_level window


555 of 11400 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 7 of 47.

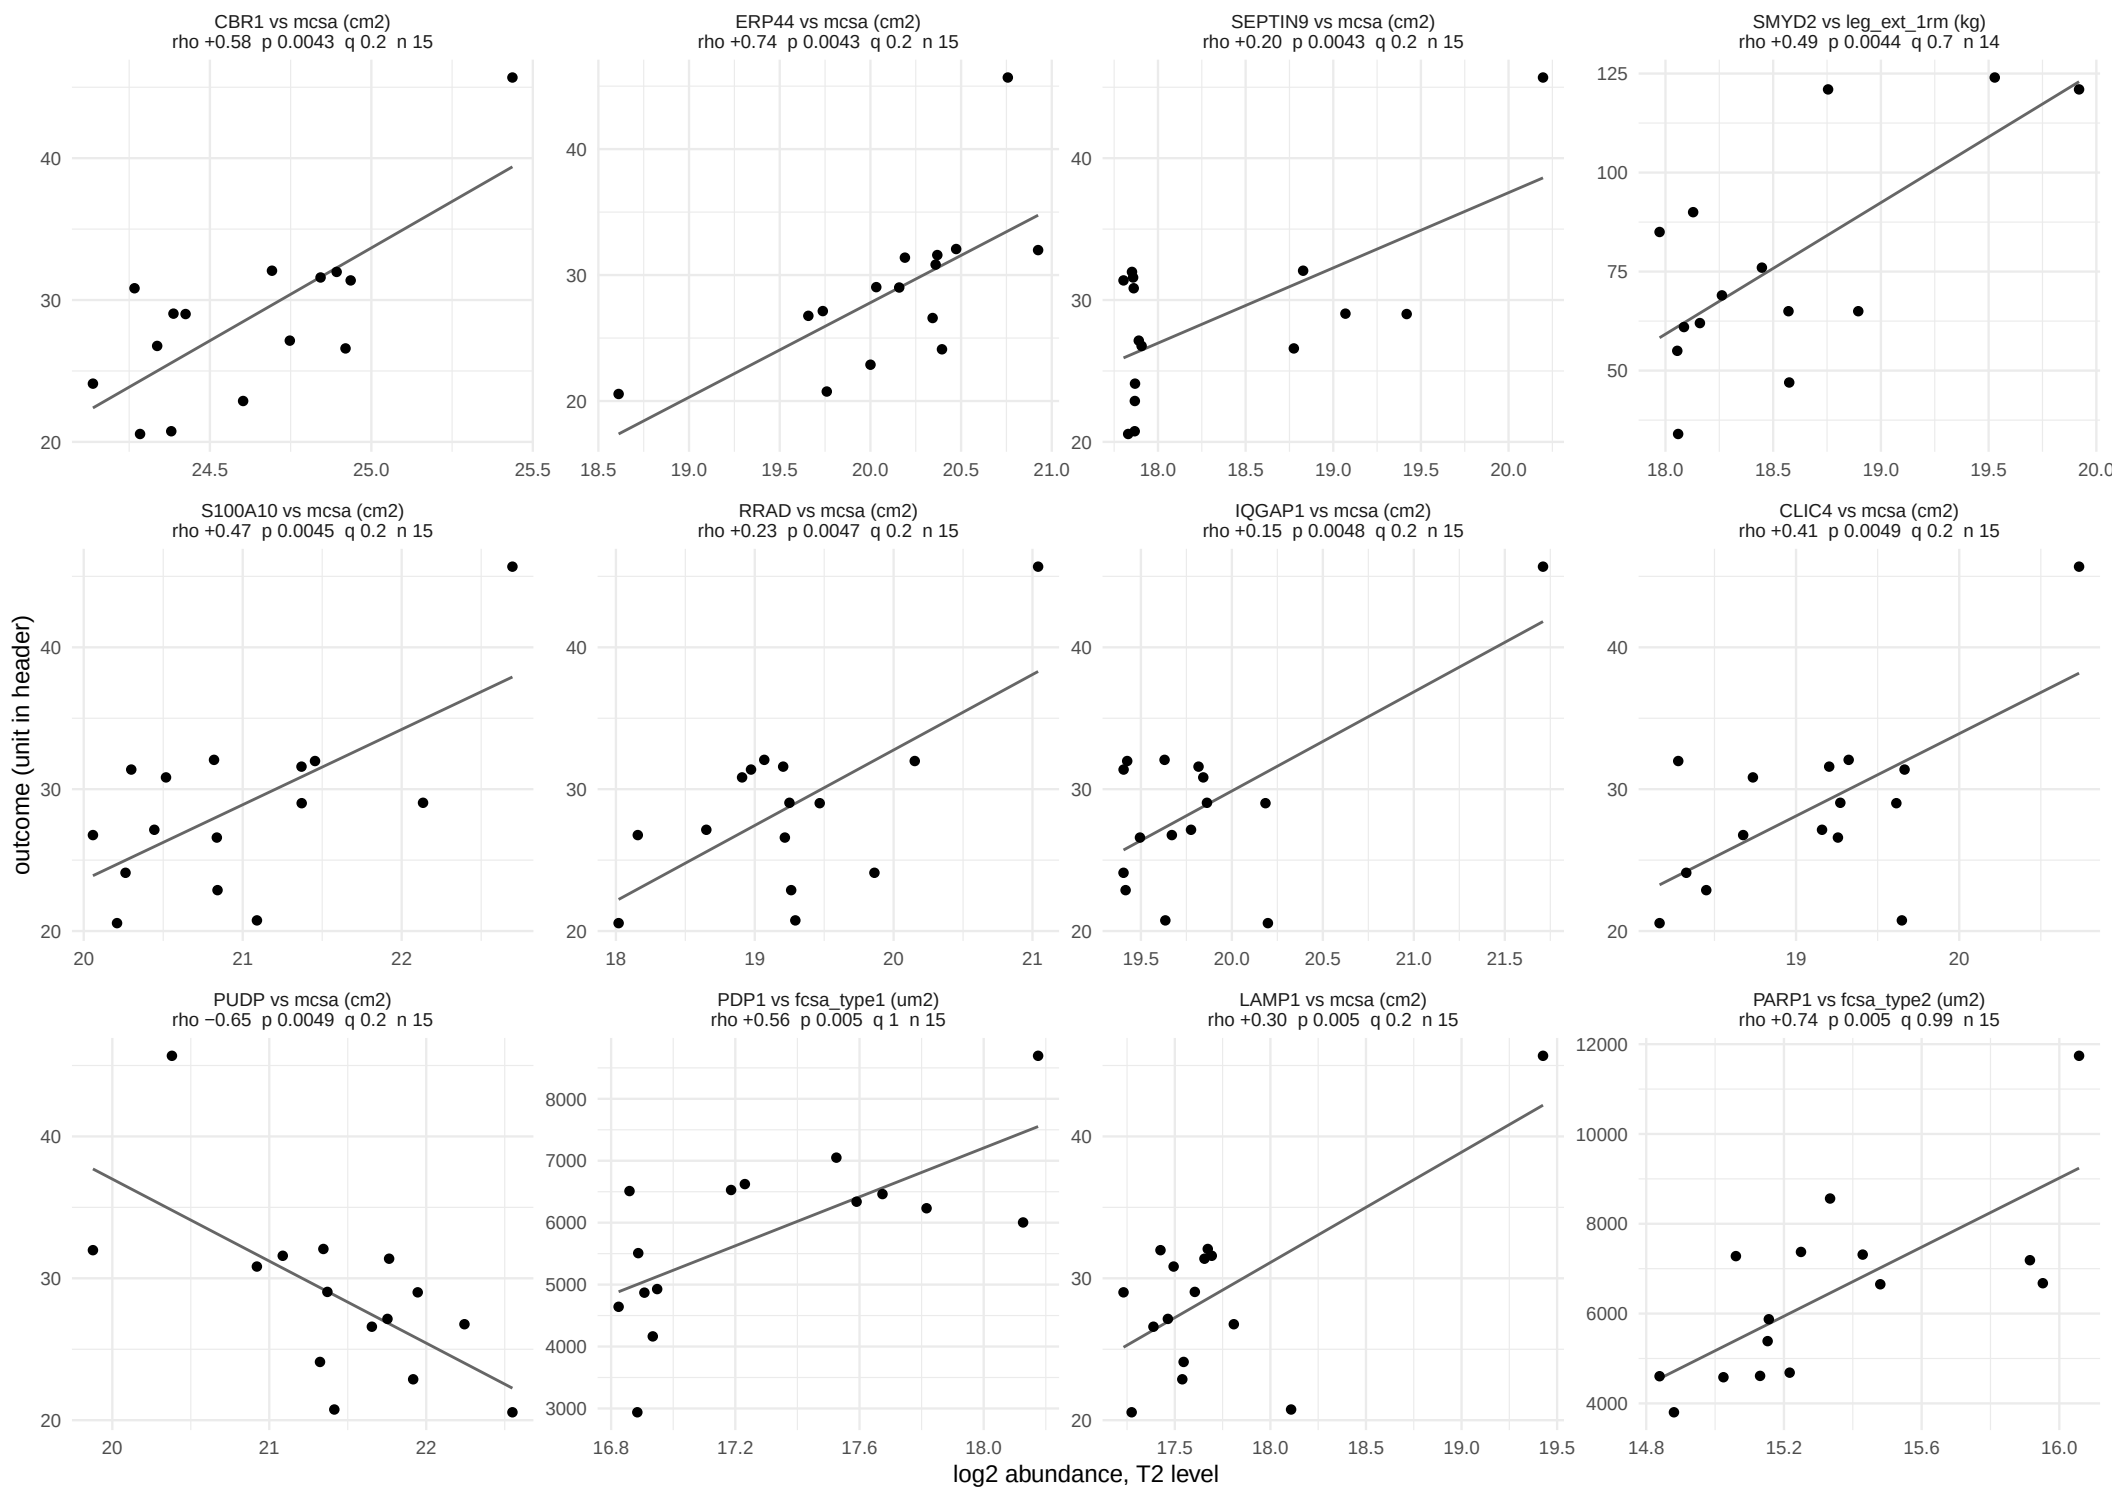

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, post_level window


555 of 11400 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 8 of 47.

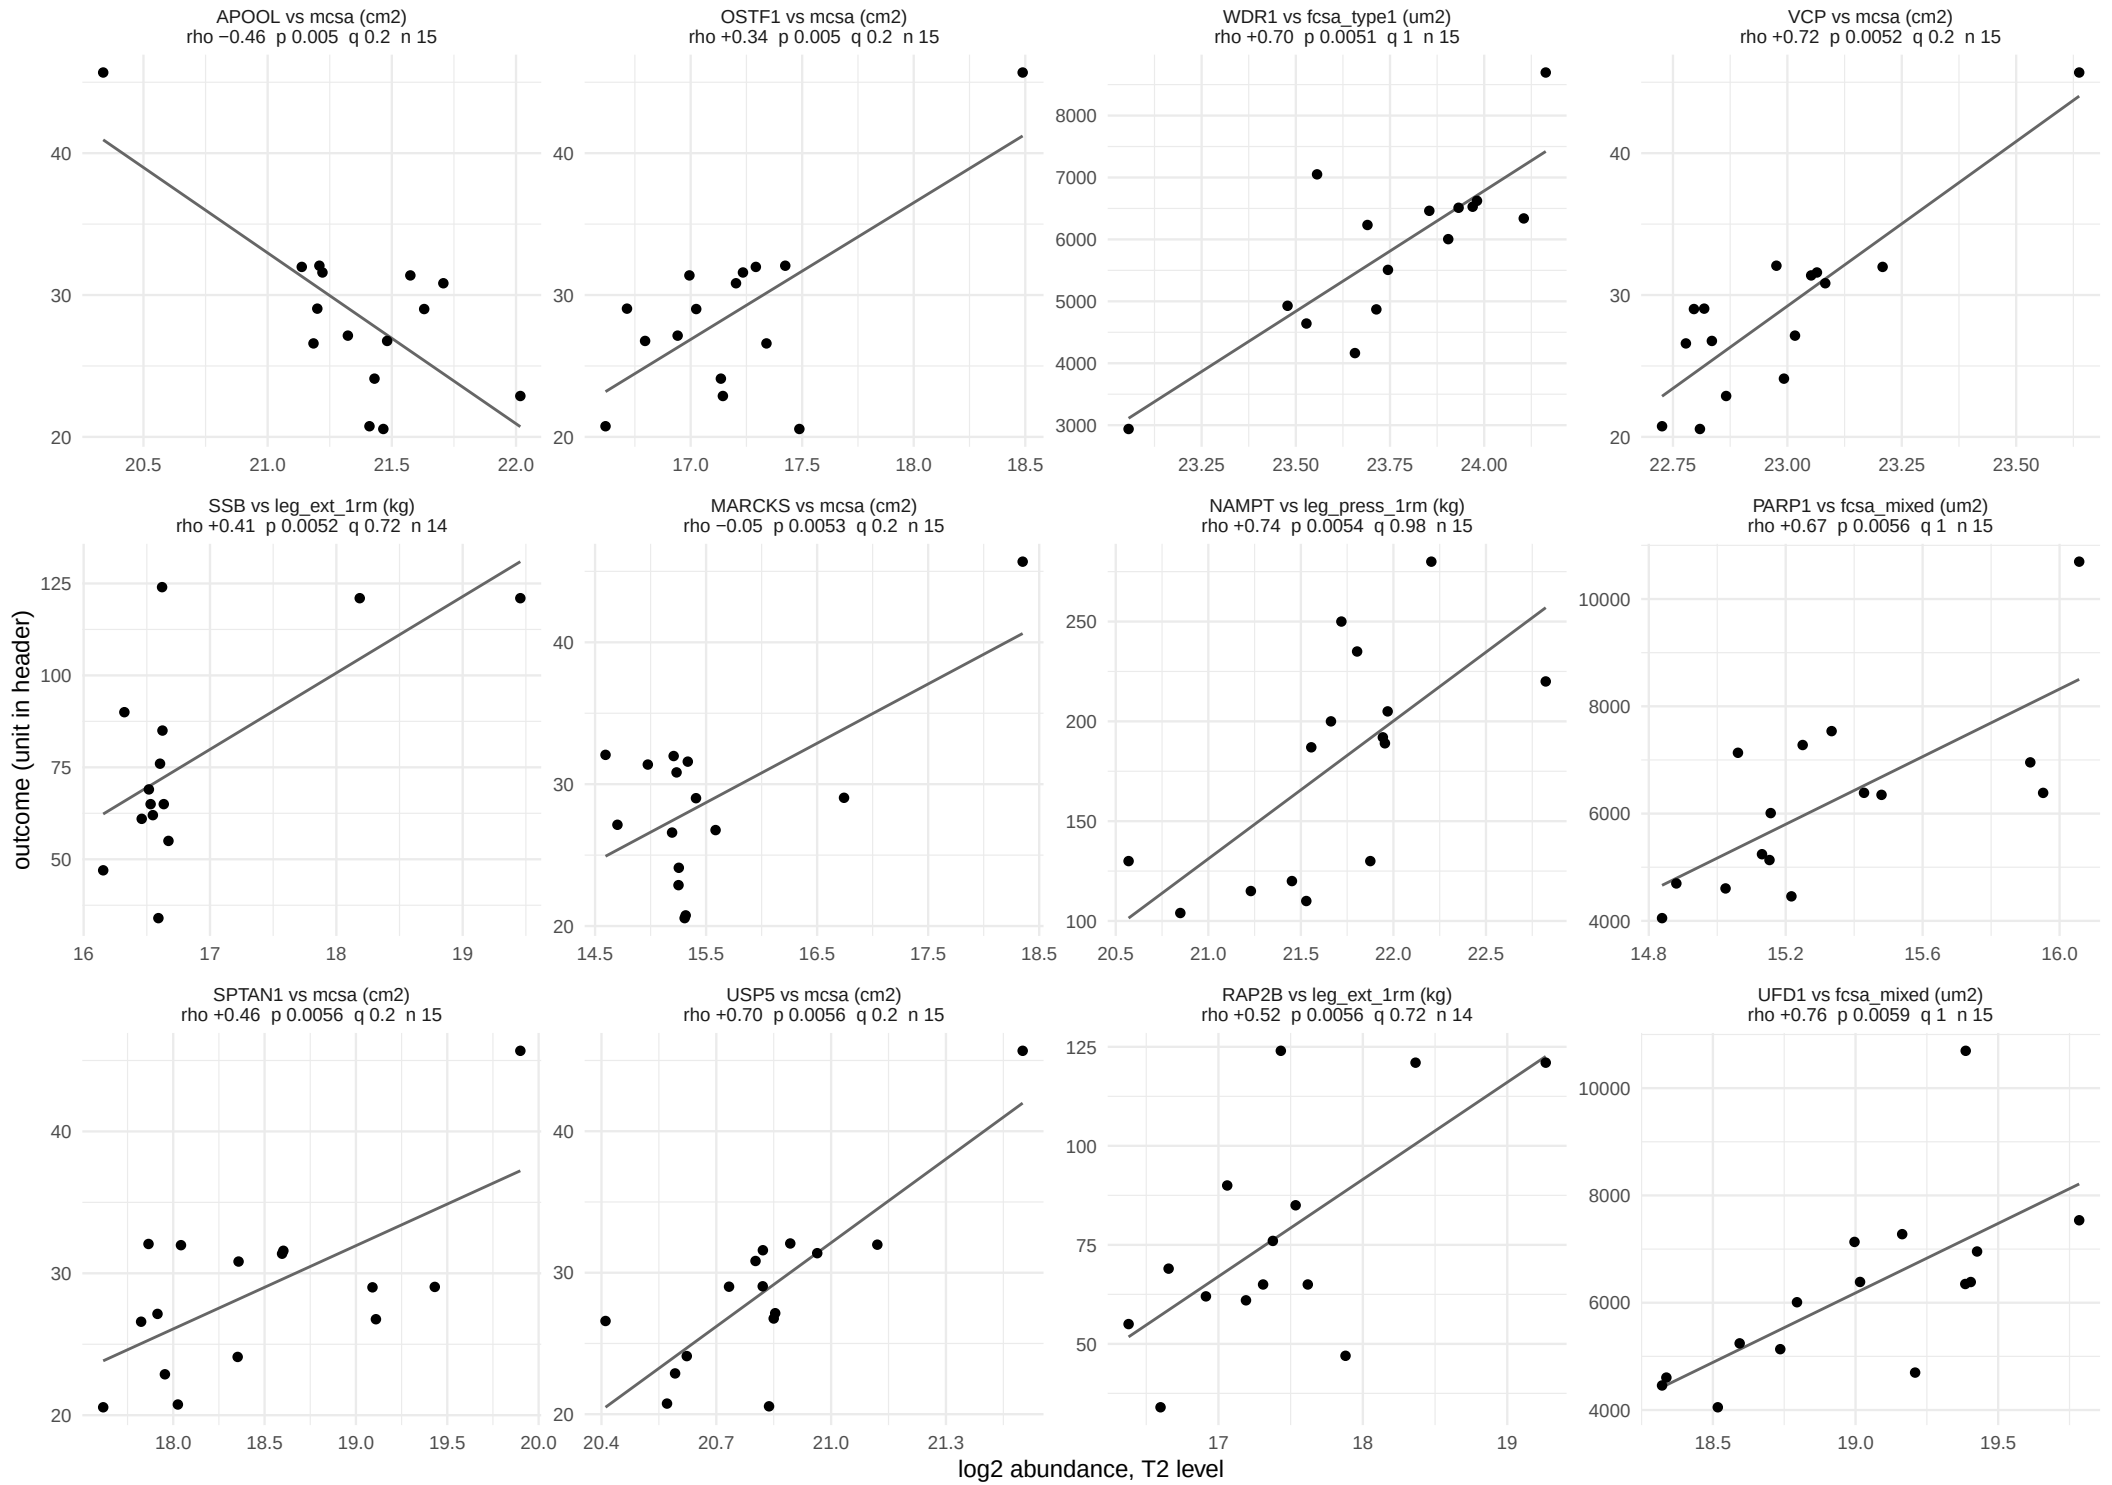

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, post_level window


555 of 11400 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 9 of 47.

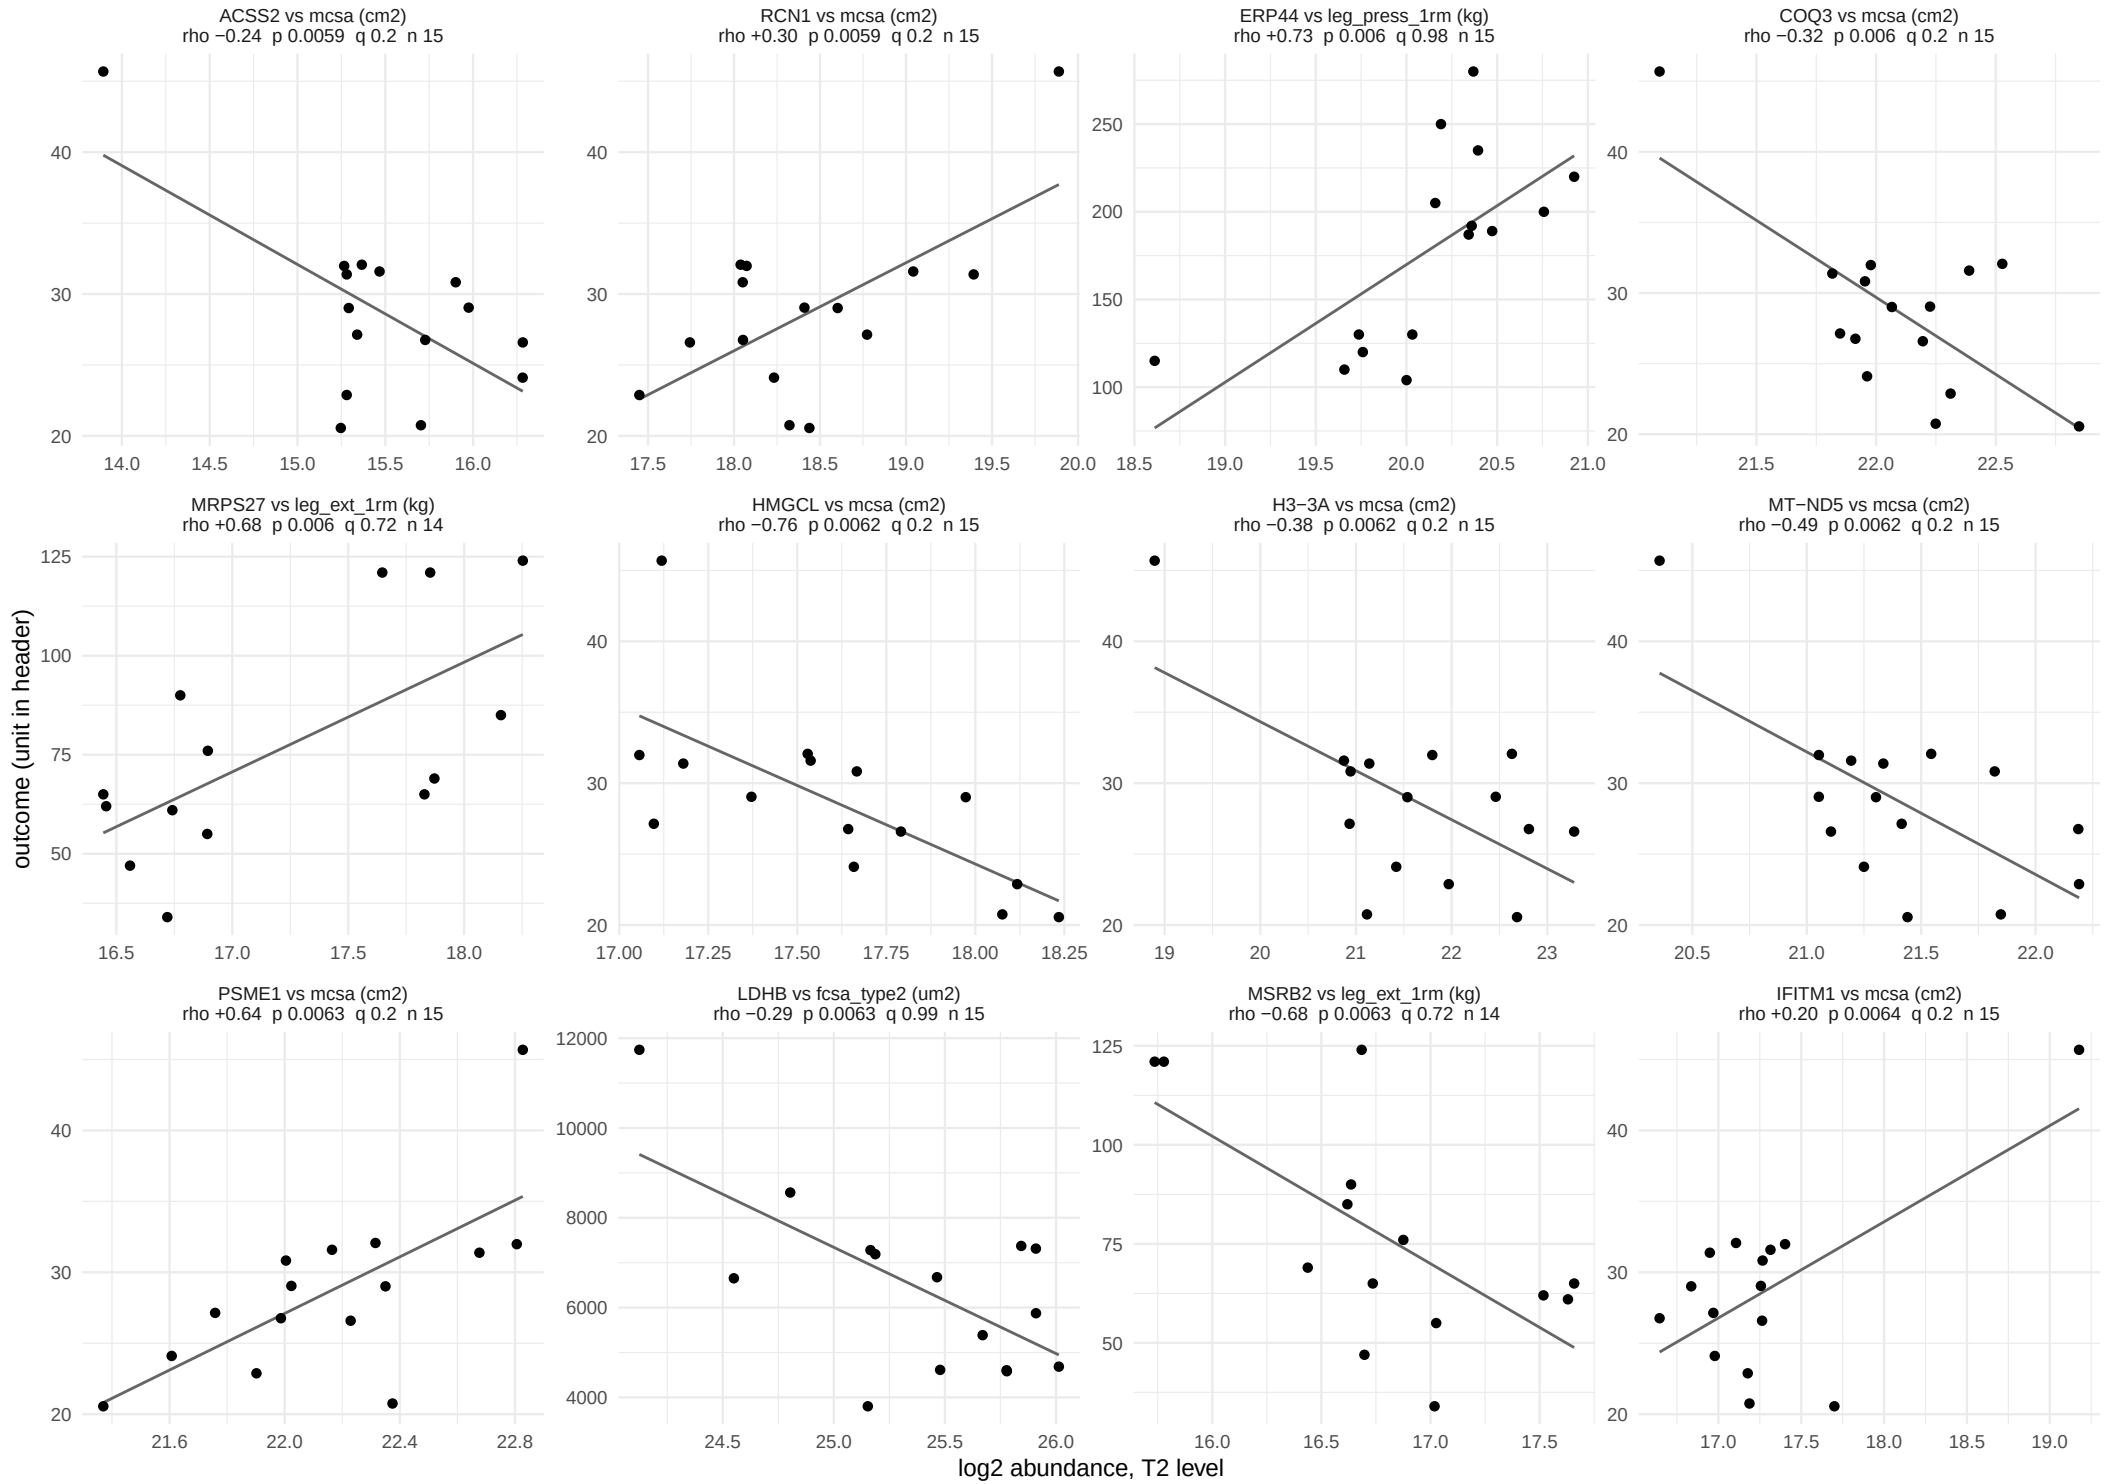

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, post_level window


555 of 11400 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 10 of 47.

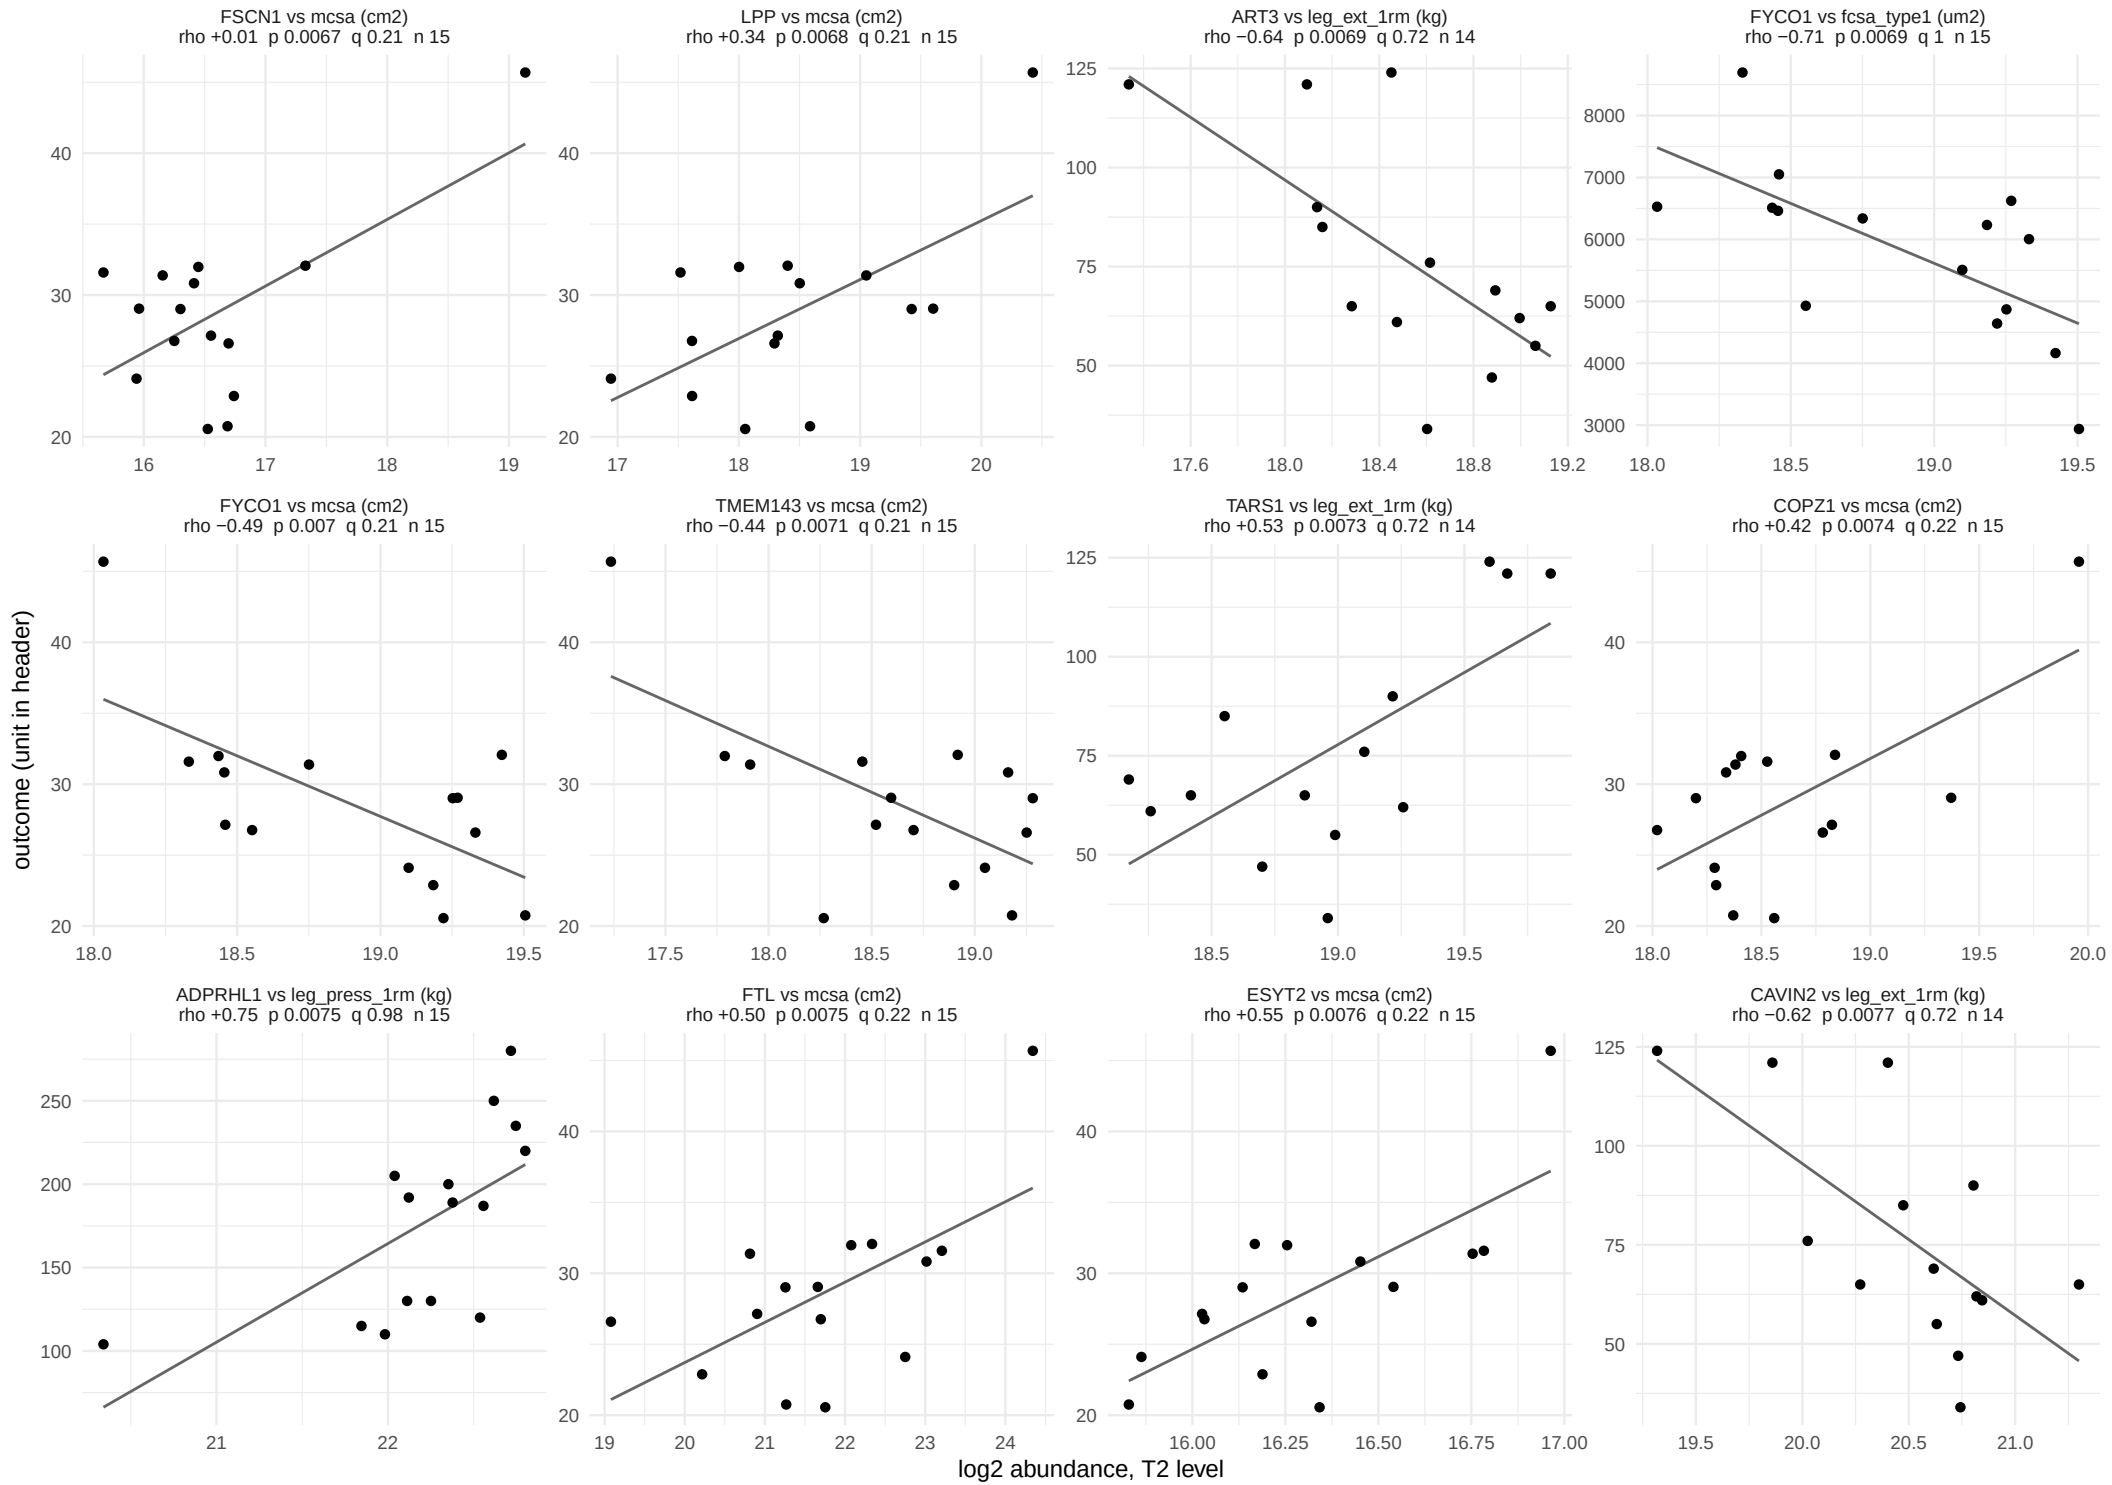

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, post_level window


555 of 11400 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 11 of 47.

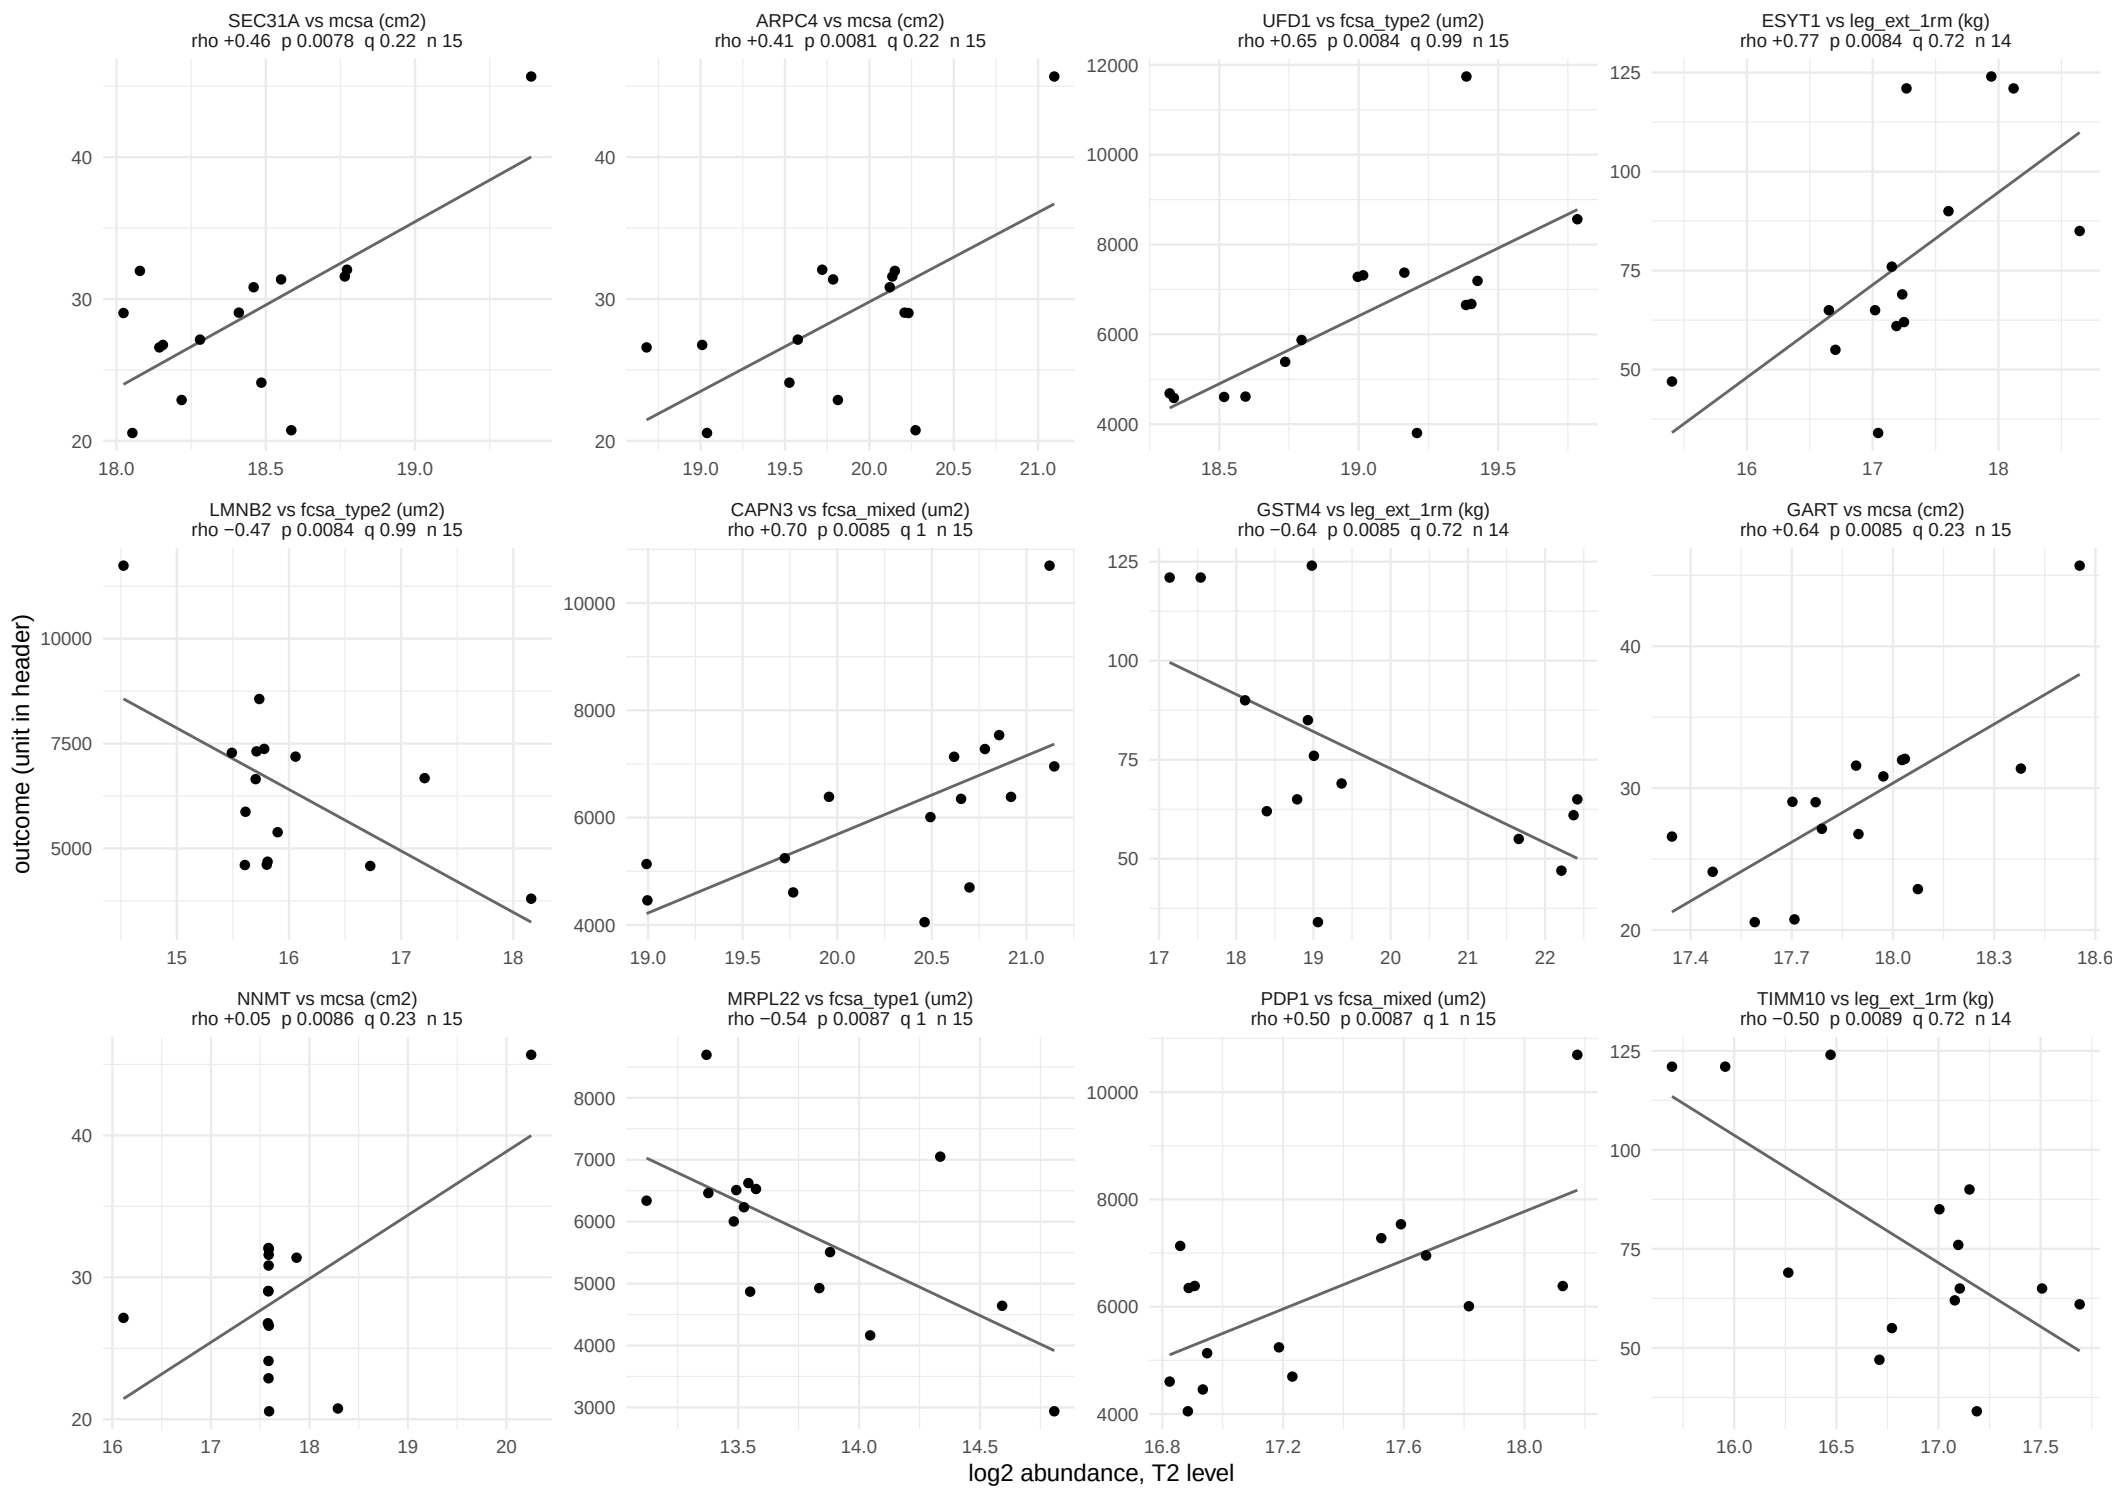

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, post_level window


555 of 11400 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 12 of 47.

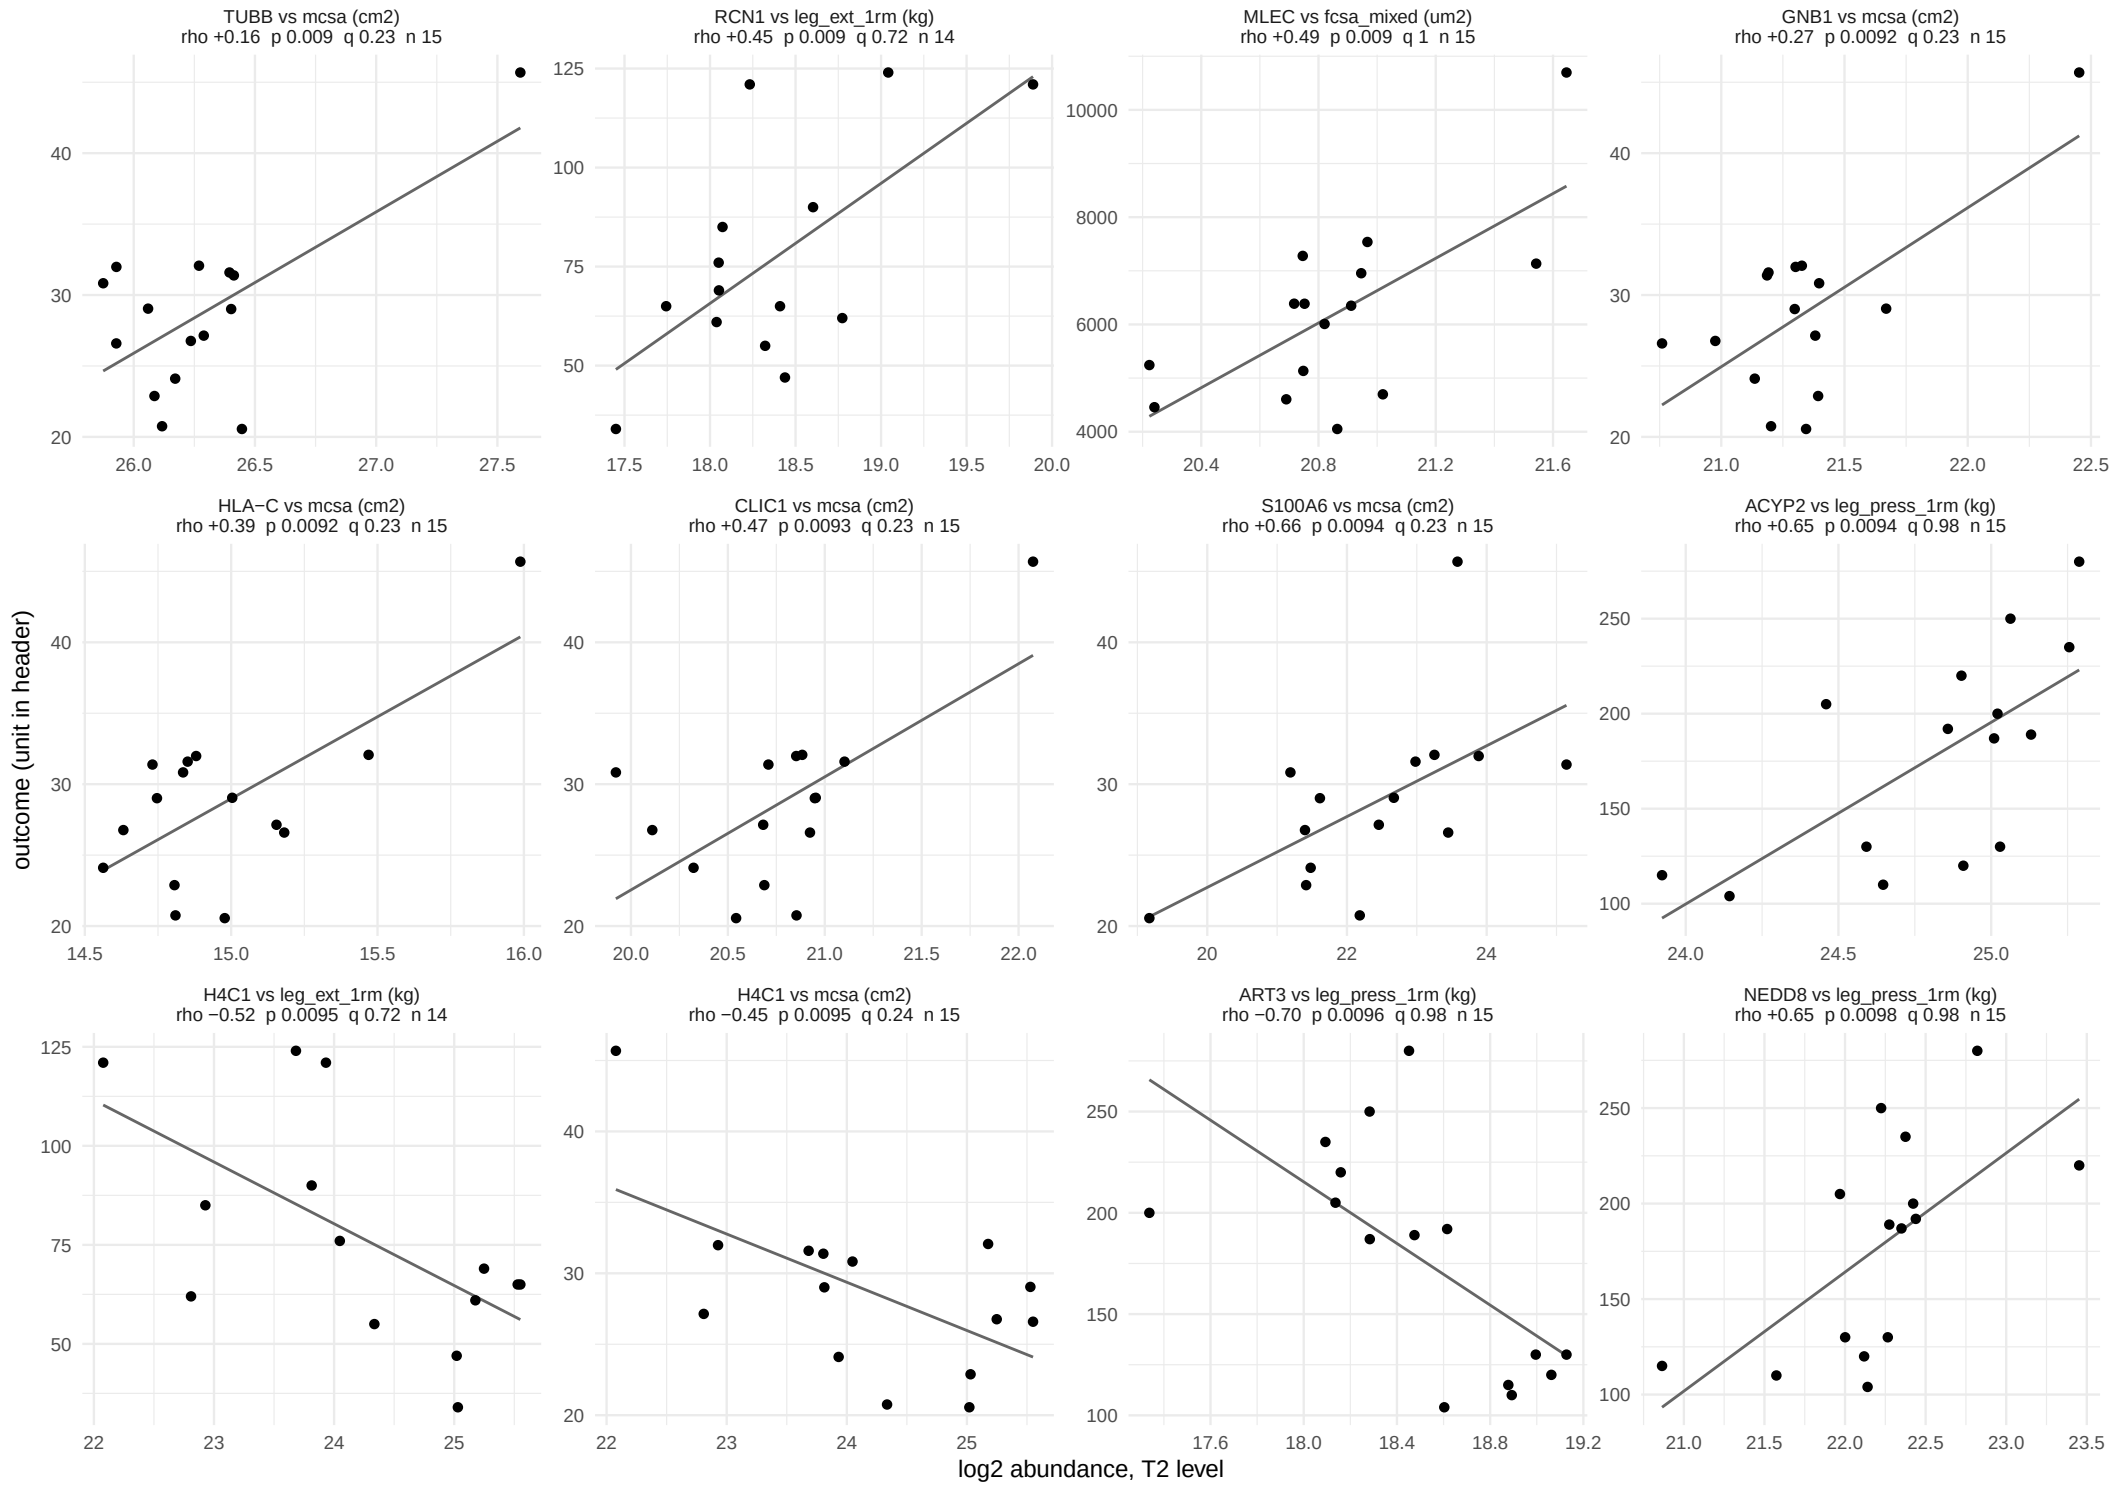

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, post_level window


555 of 11400 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 13 of 47.

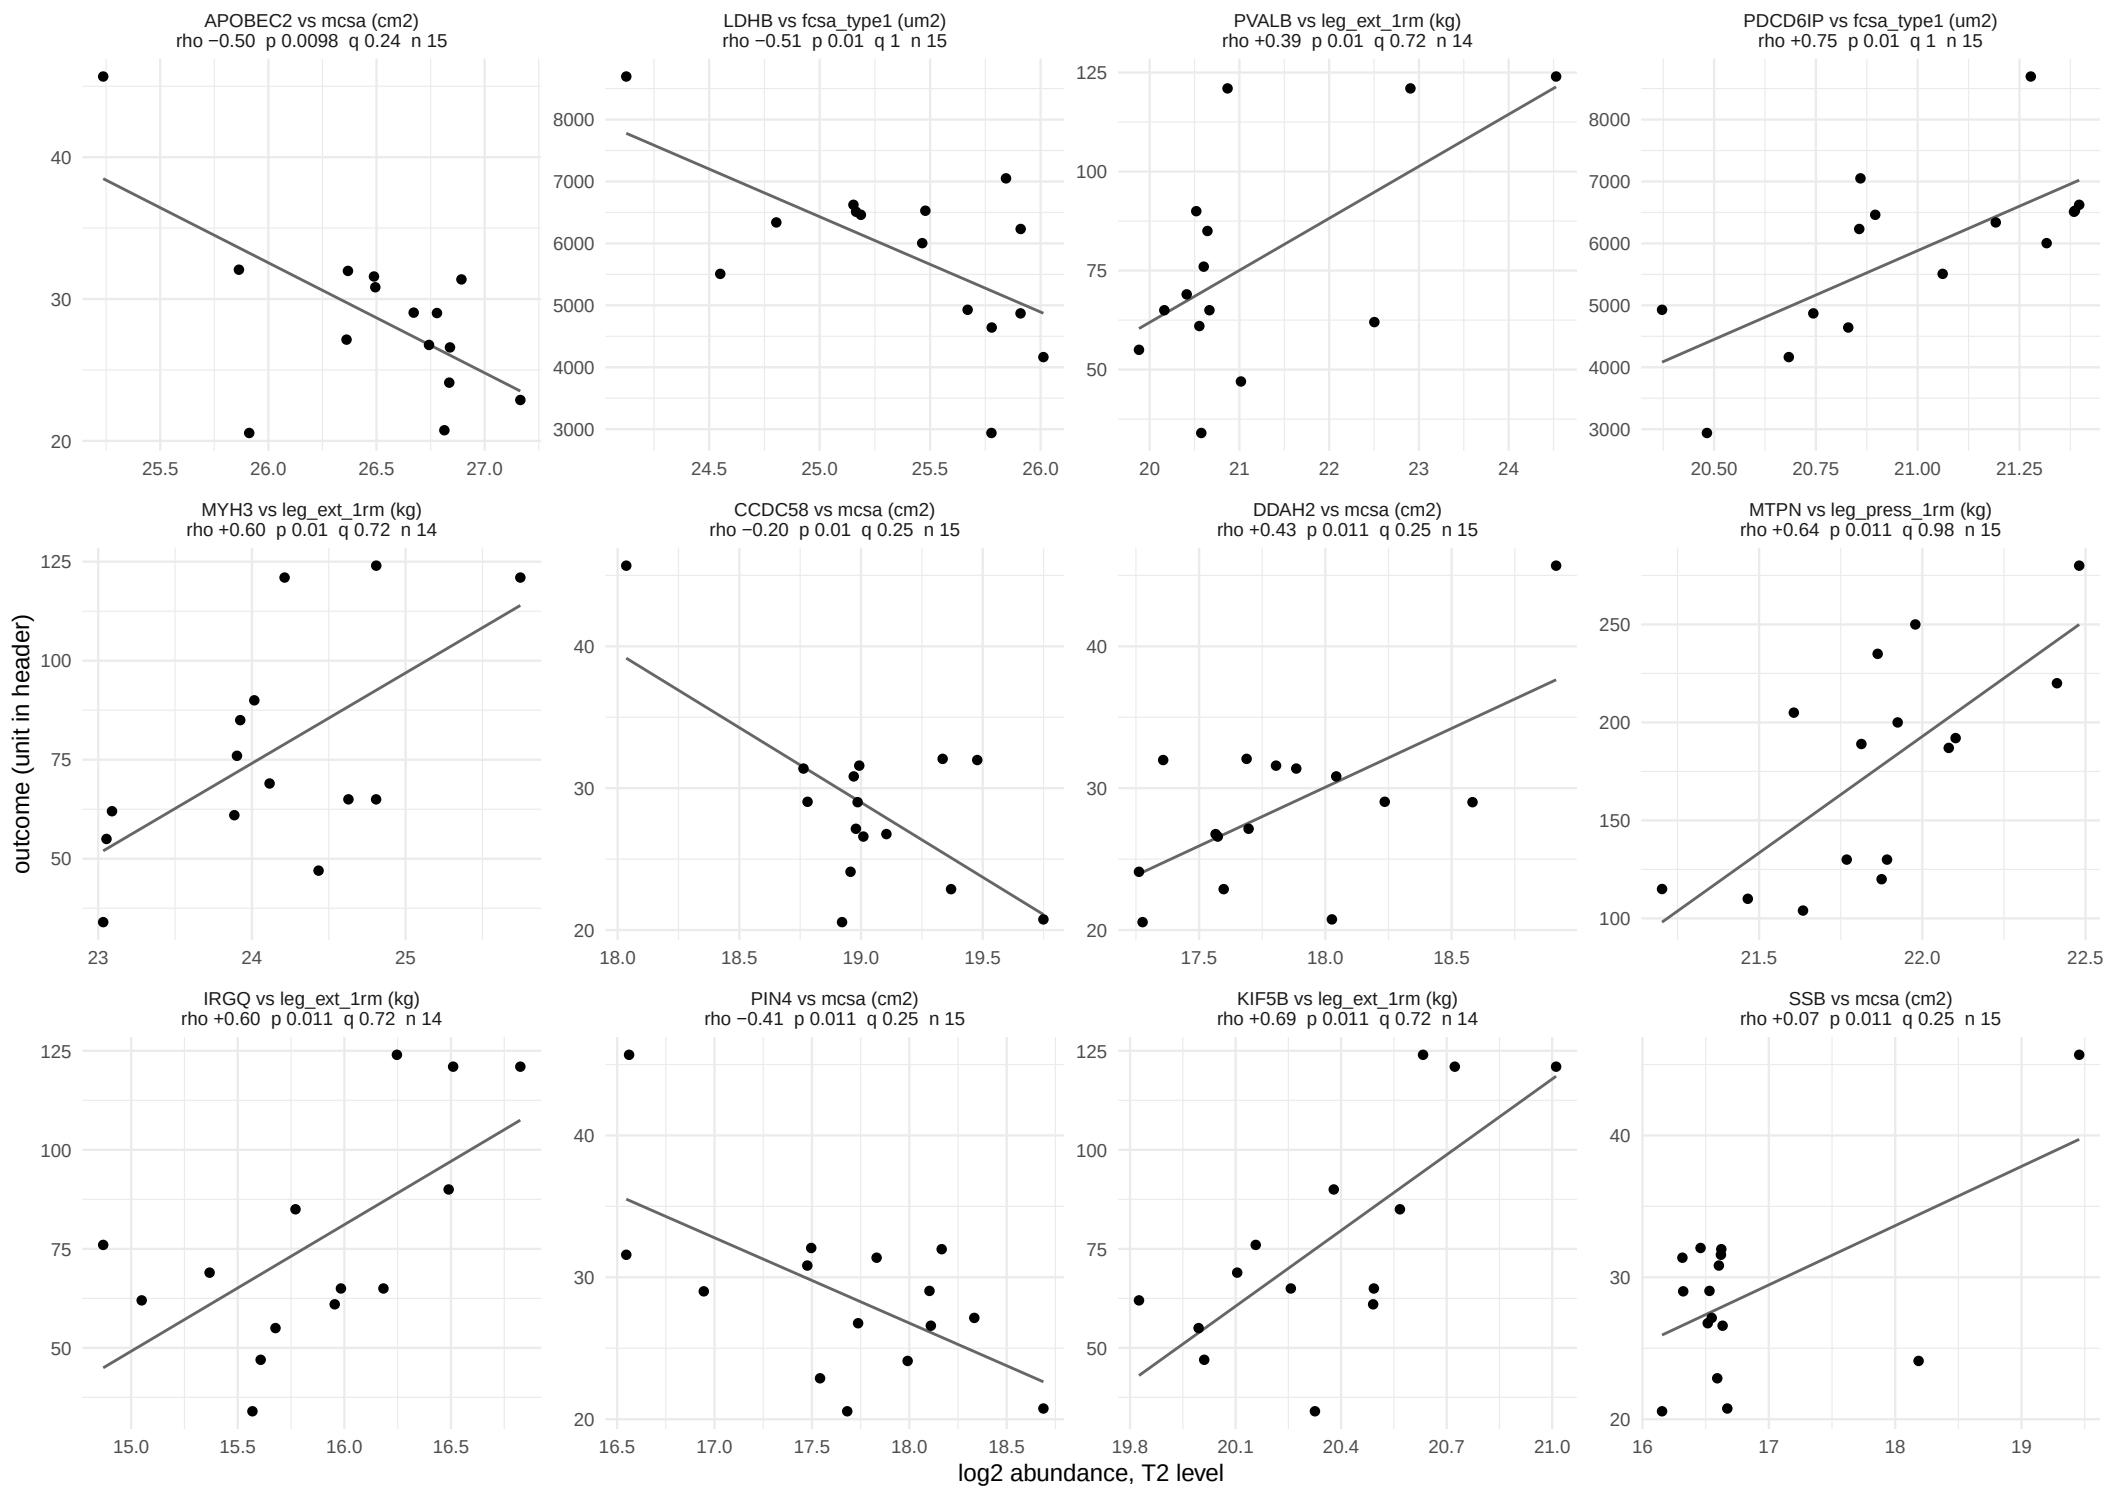

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, post_level window


555 of 11400 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 14 of 47.

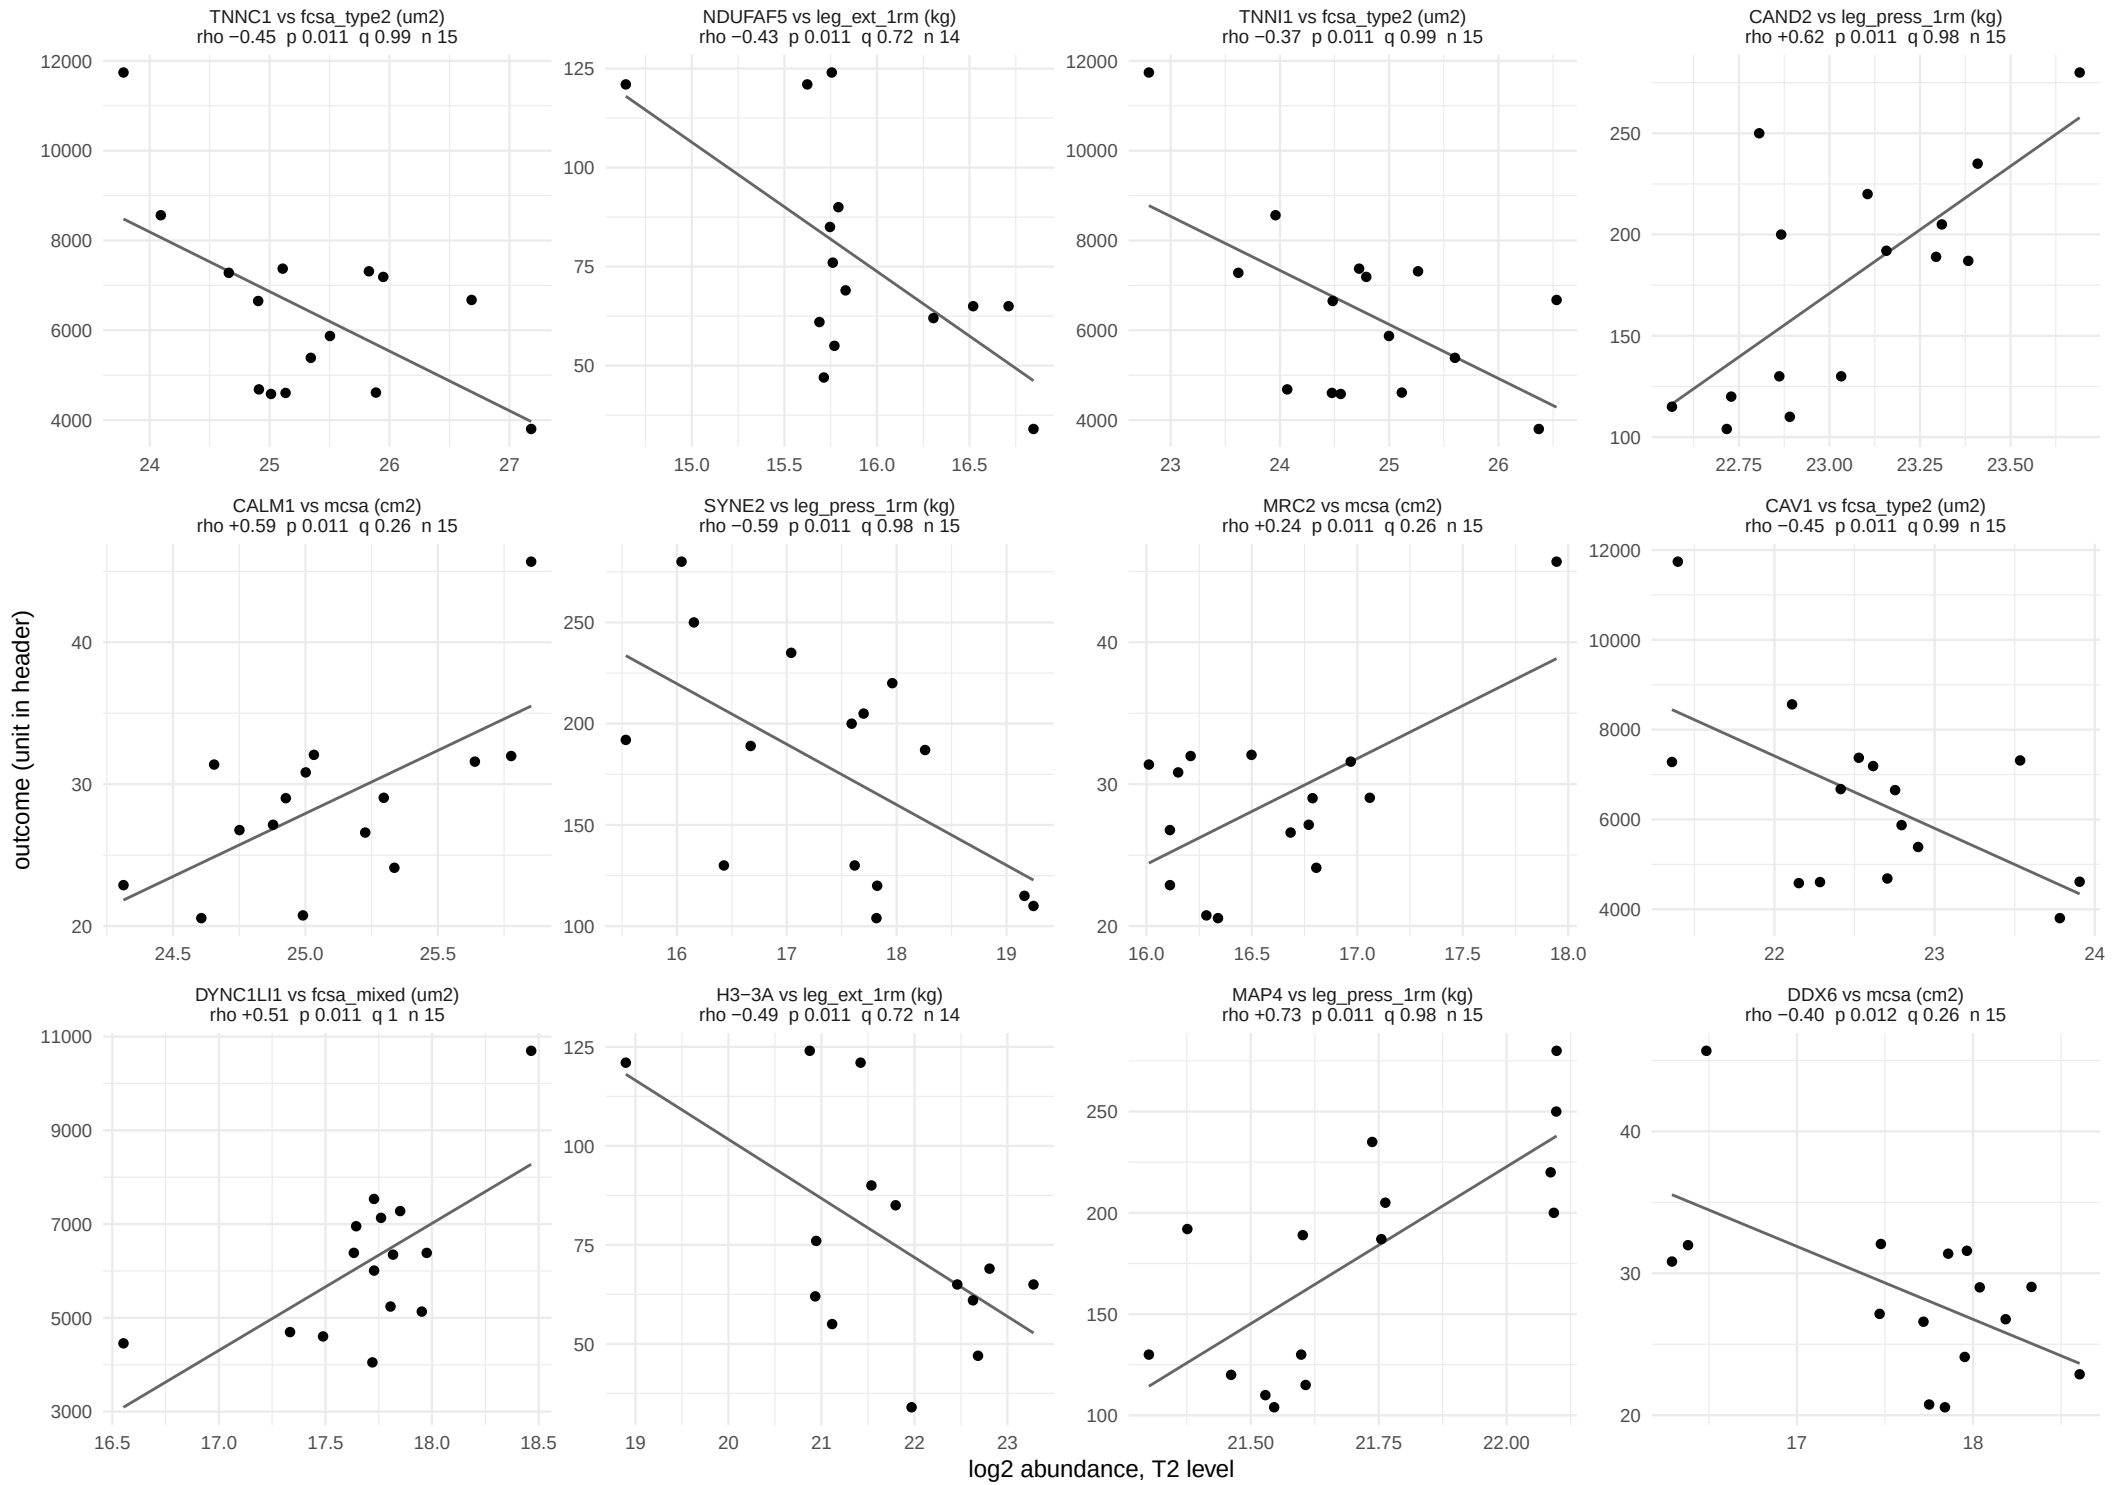

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, post_level window


555 of 11400 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 15 of 47.

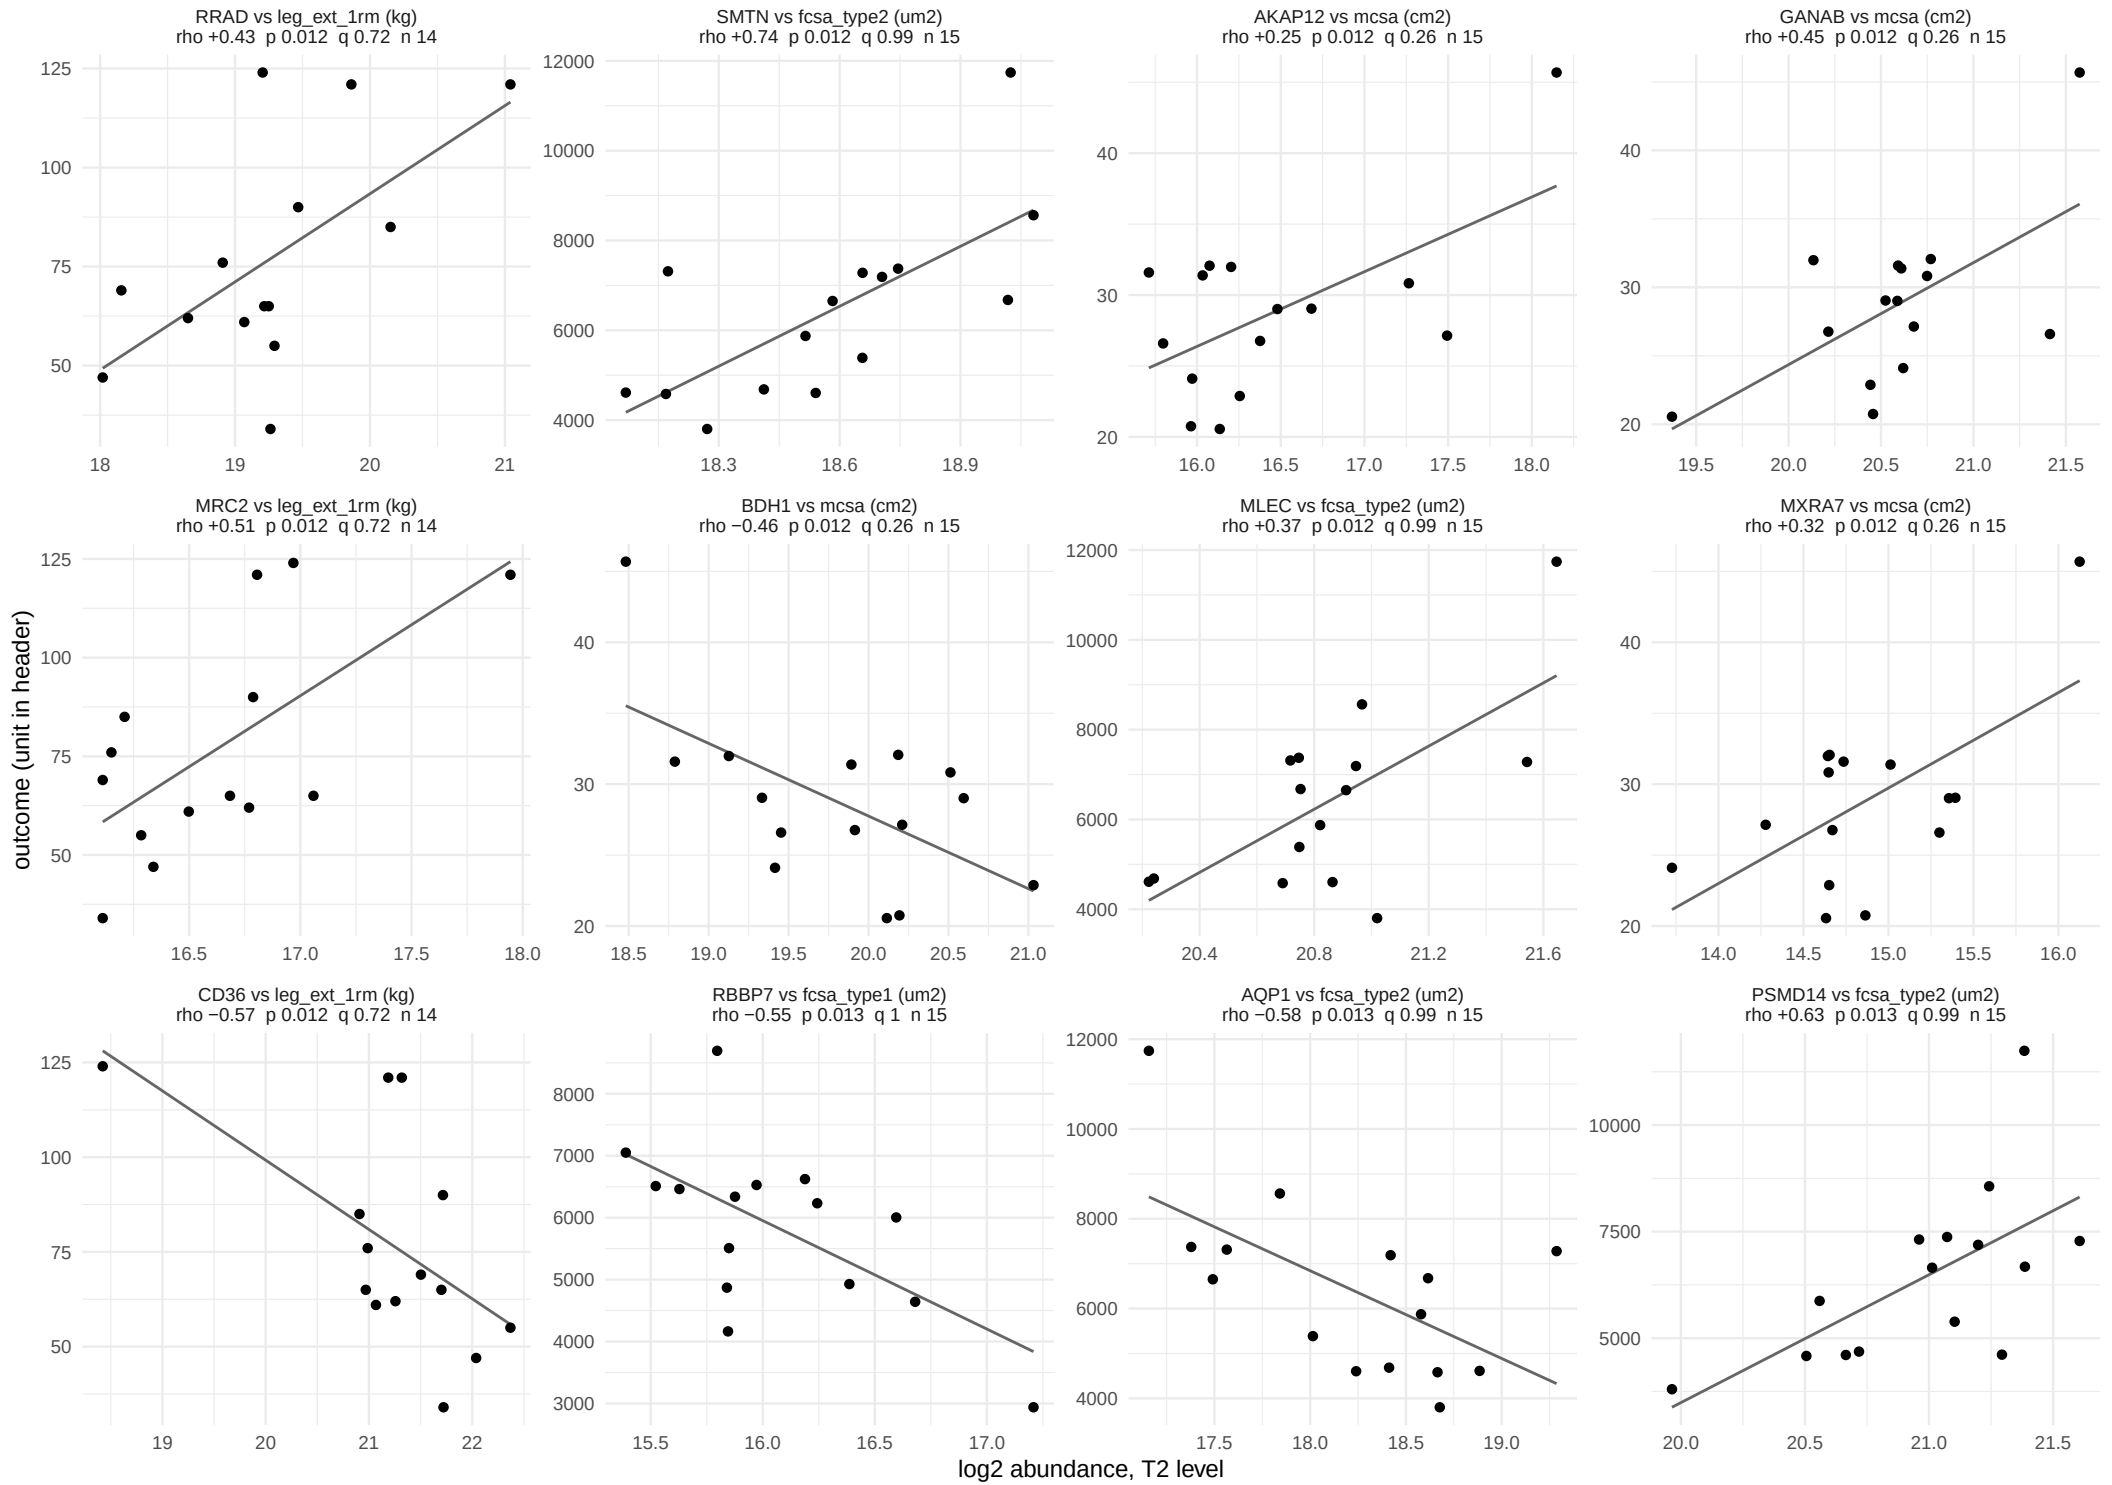

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, post_level window


555 of 11400 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 16 of 47.

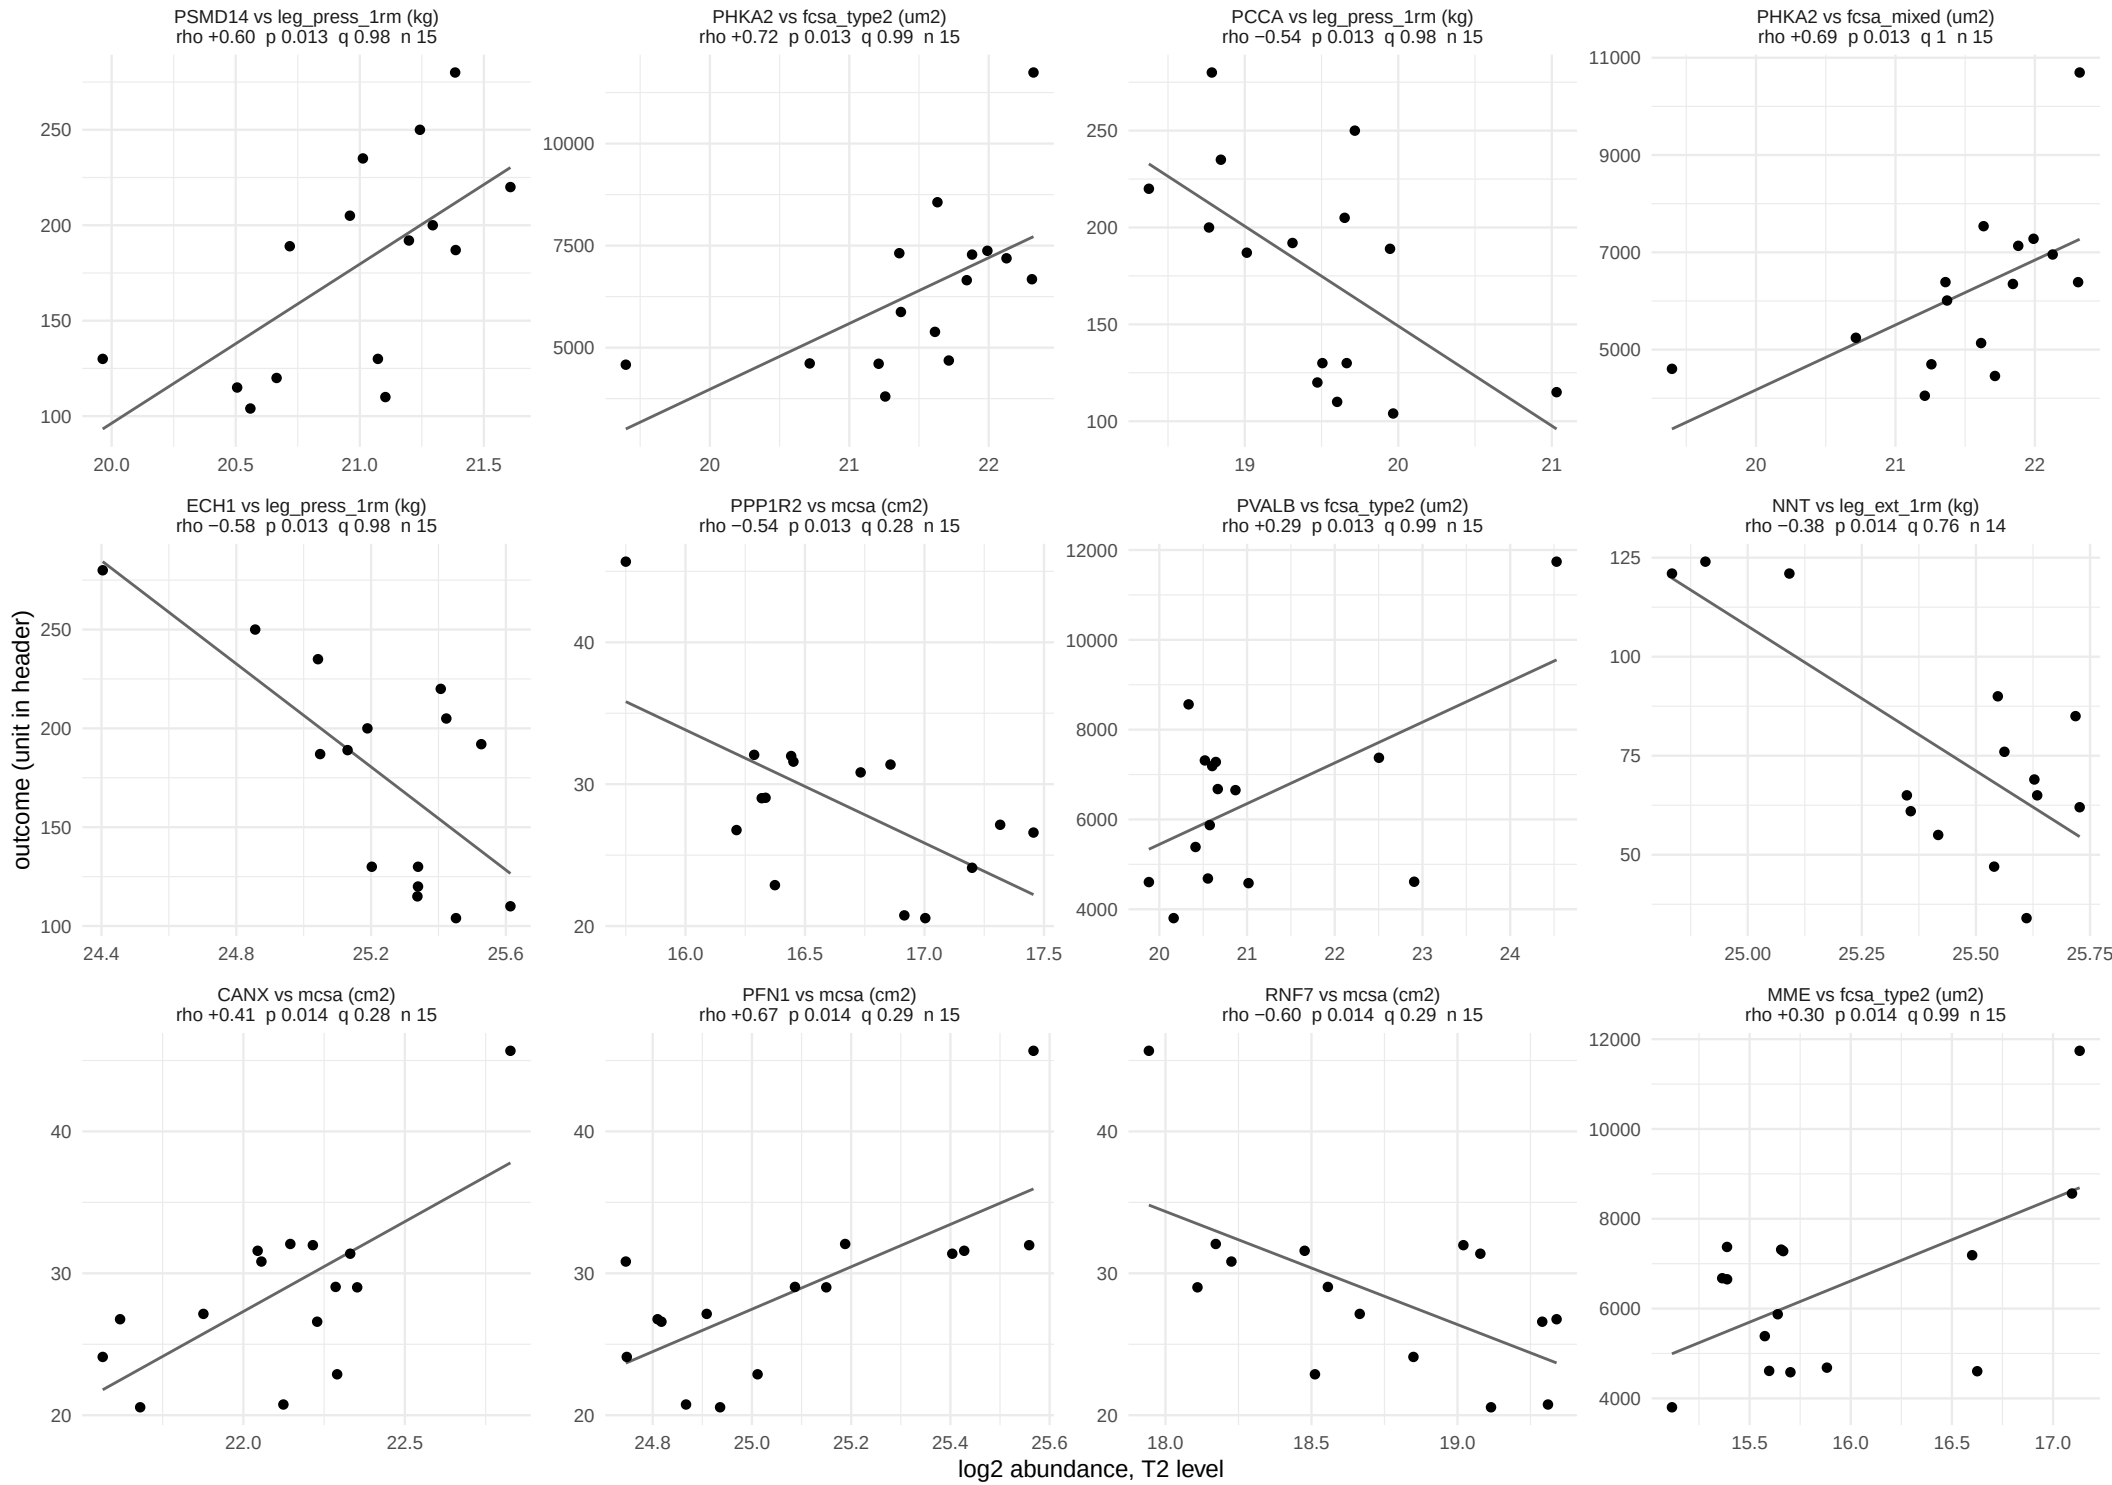

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, post_level window


555 of 11400 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 17 of 47.

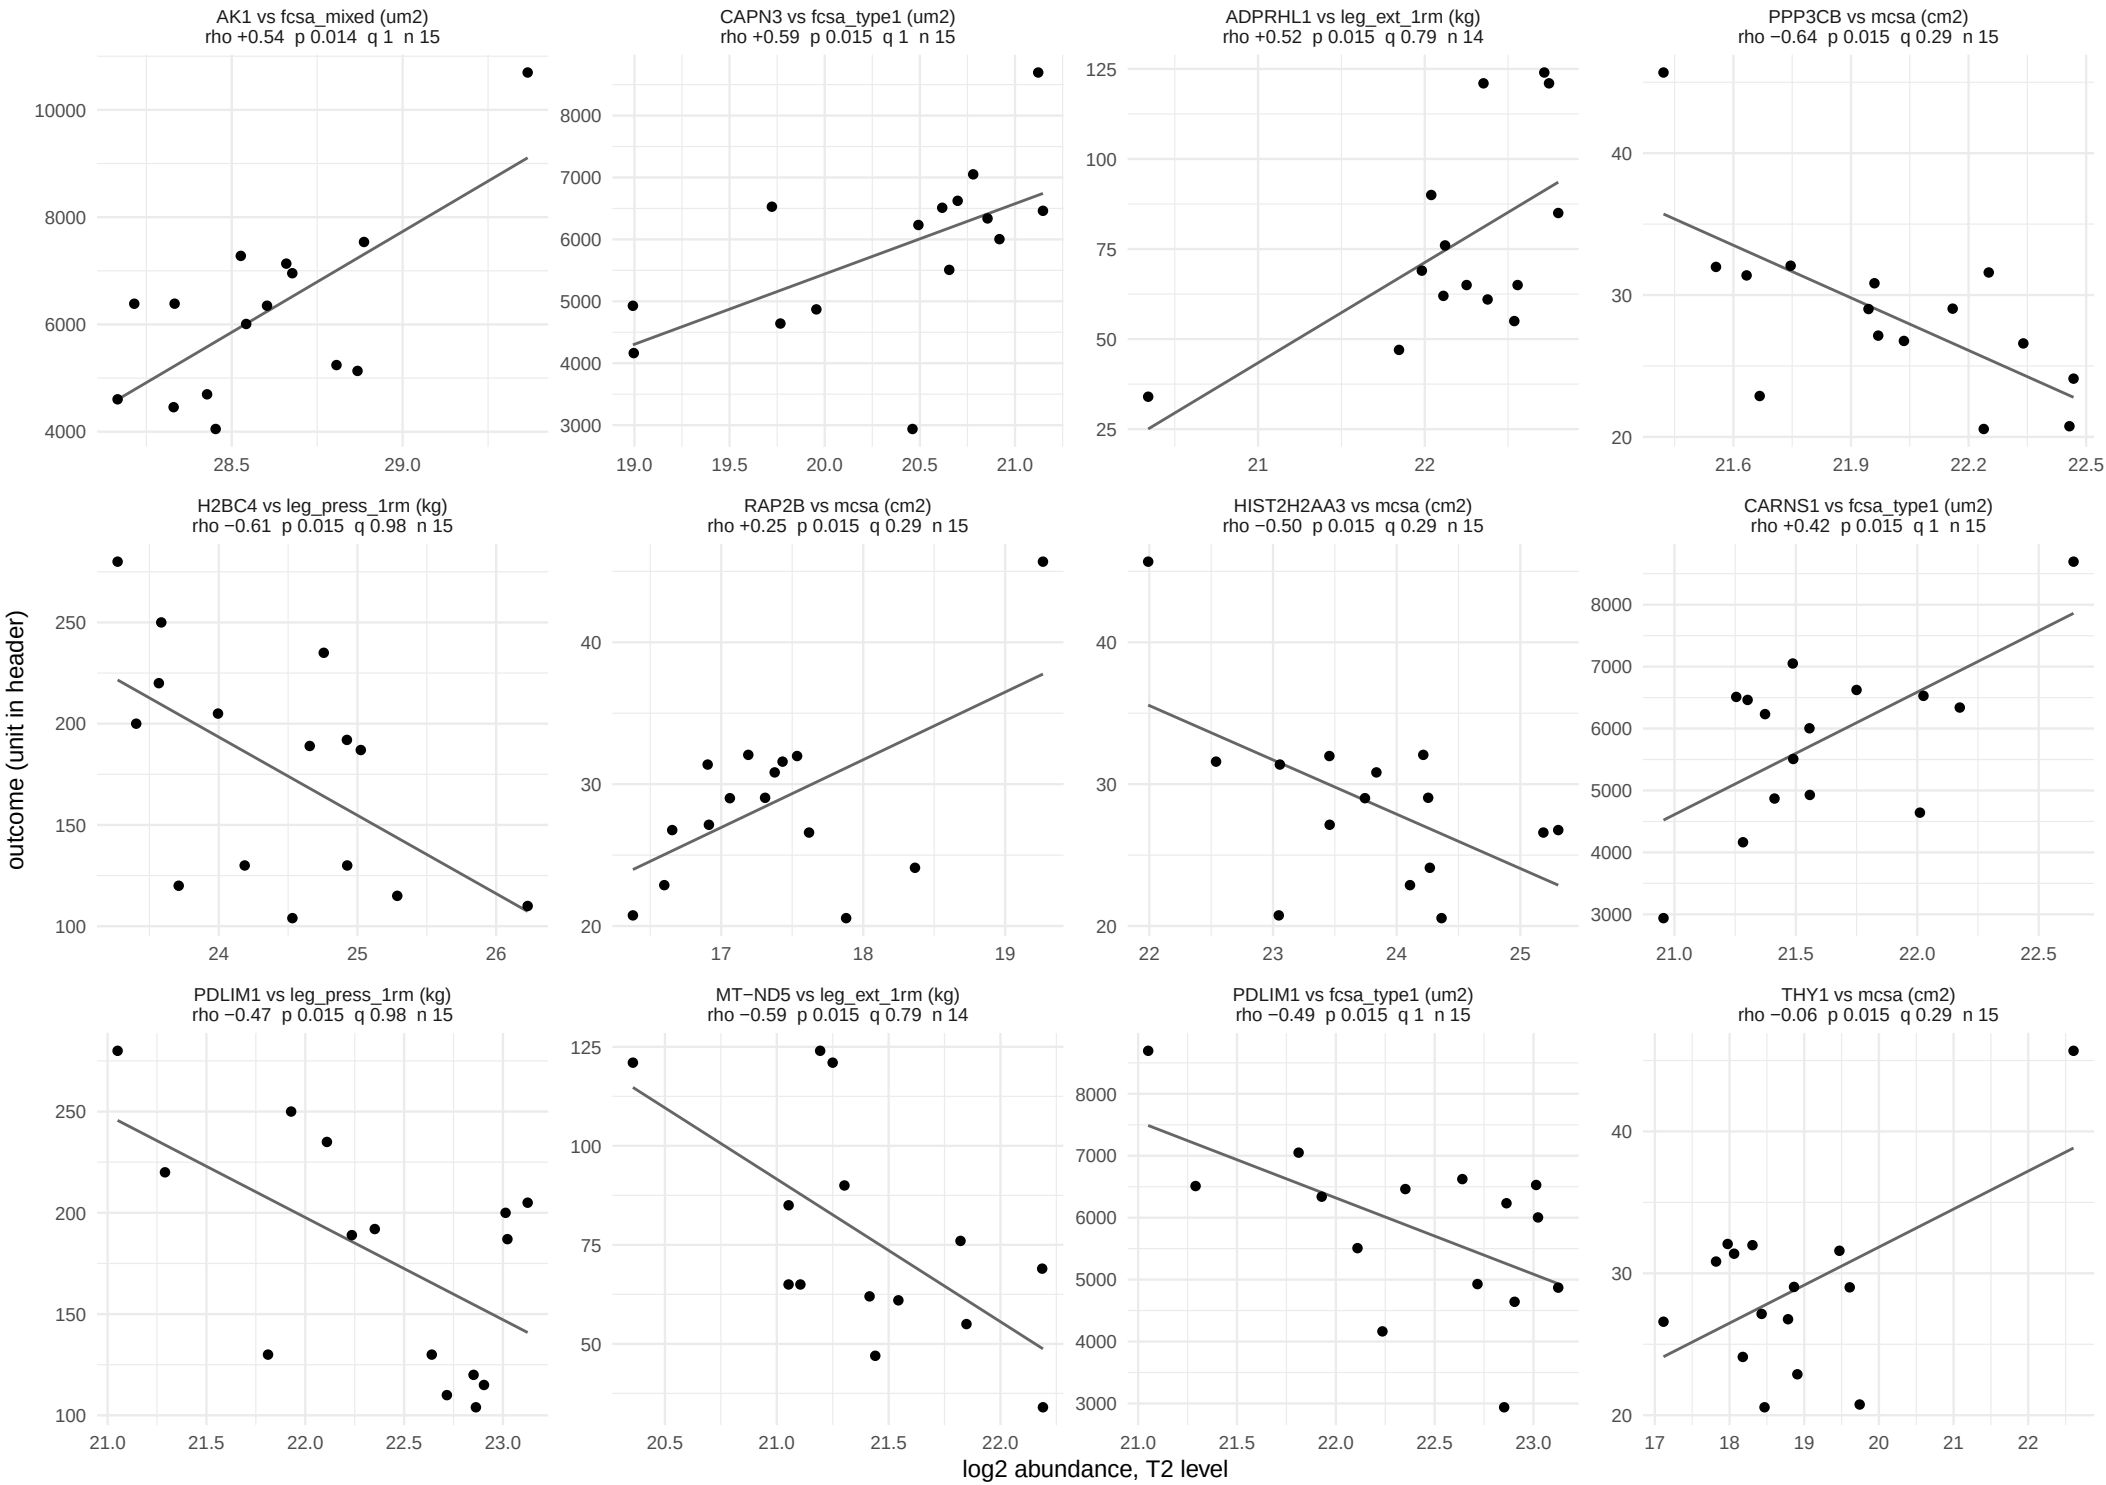

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, post_level window


555 of 11400 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 18 of 47.

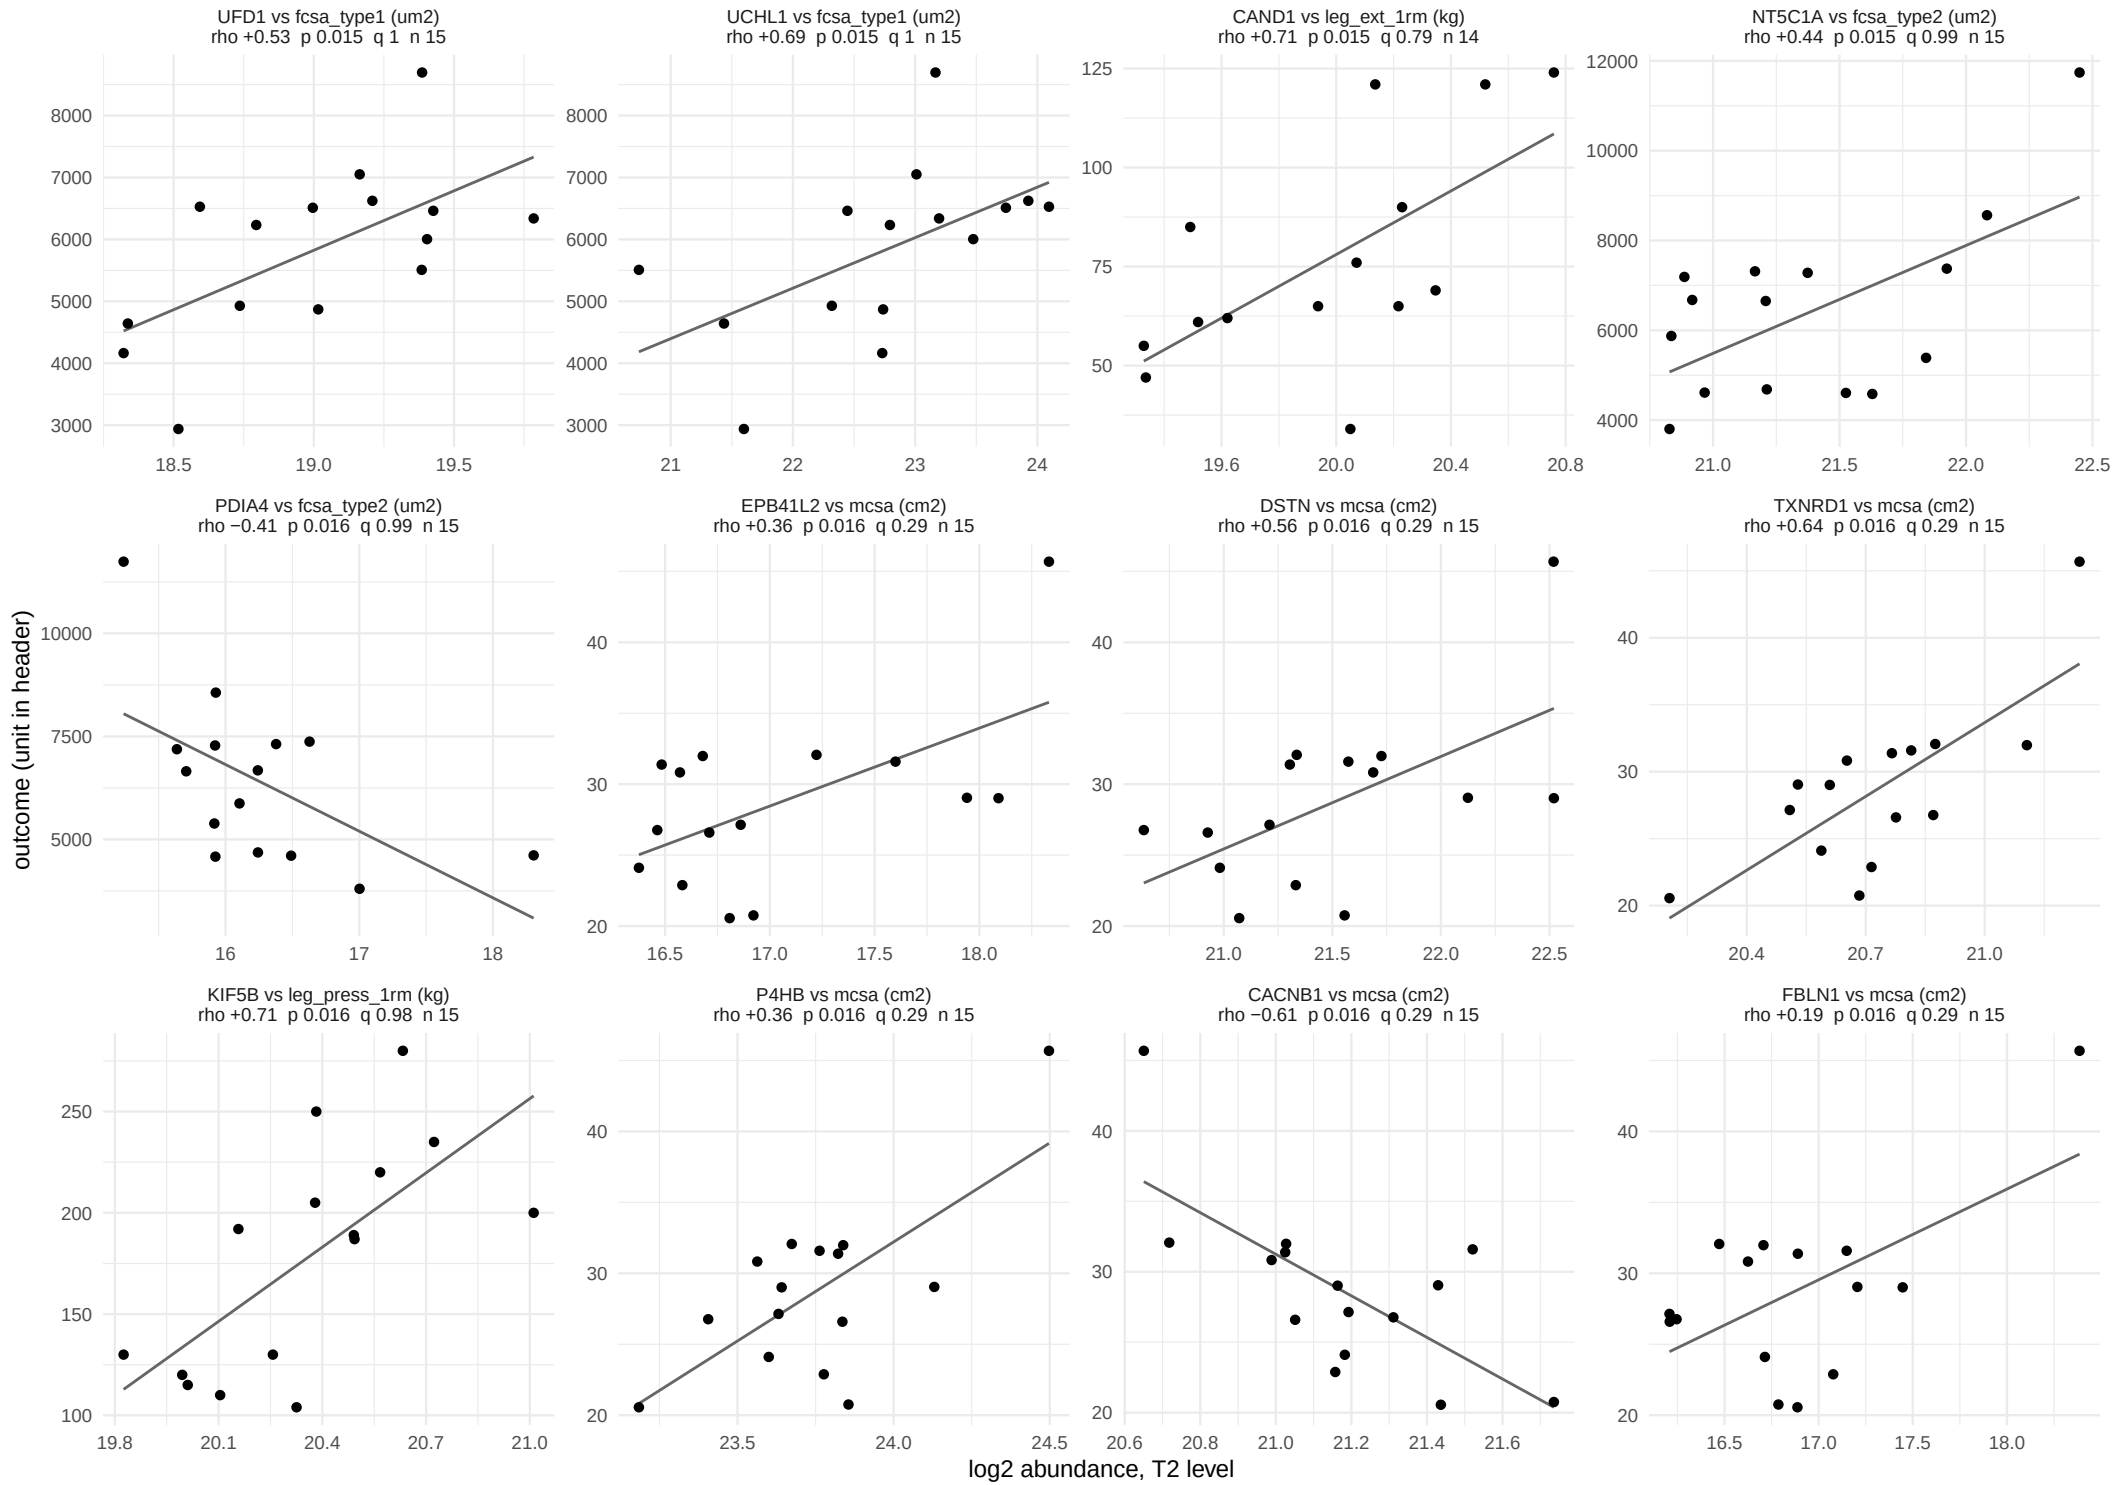

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, post_level window


555 of 11400 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 19 of 47.

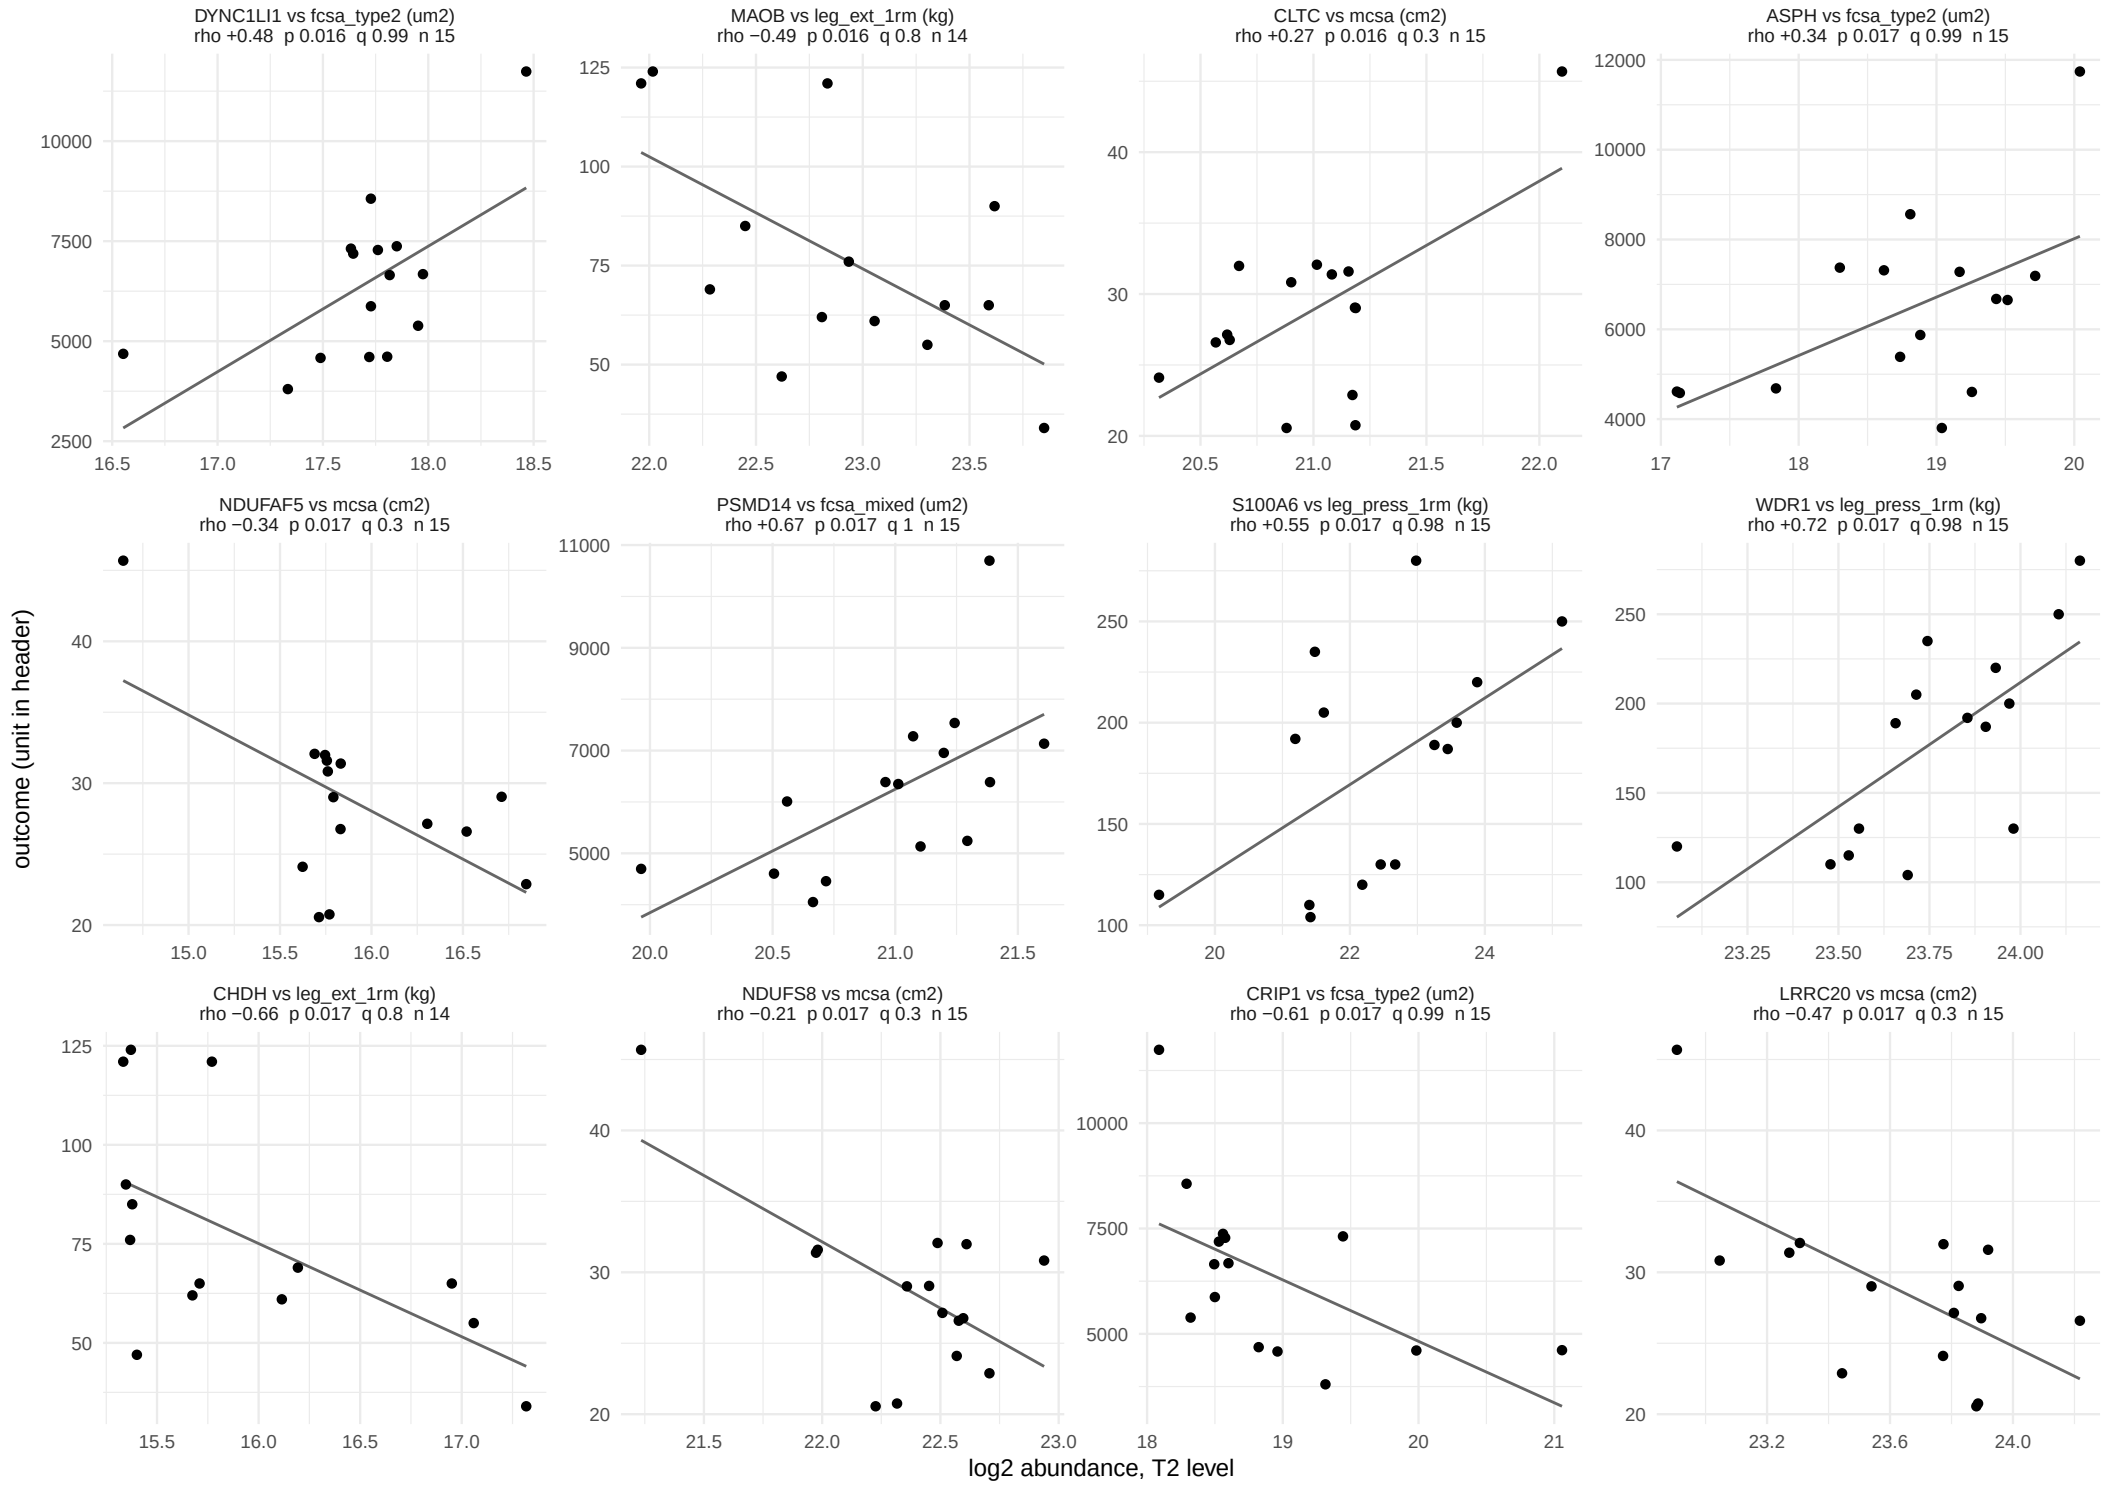

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, post_level window


555 of 11400 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 20 of 47.

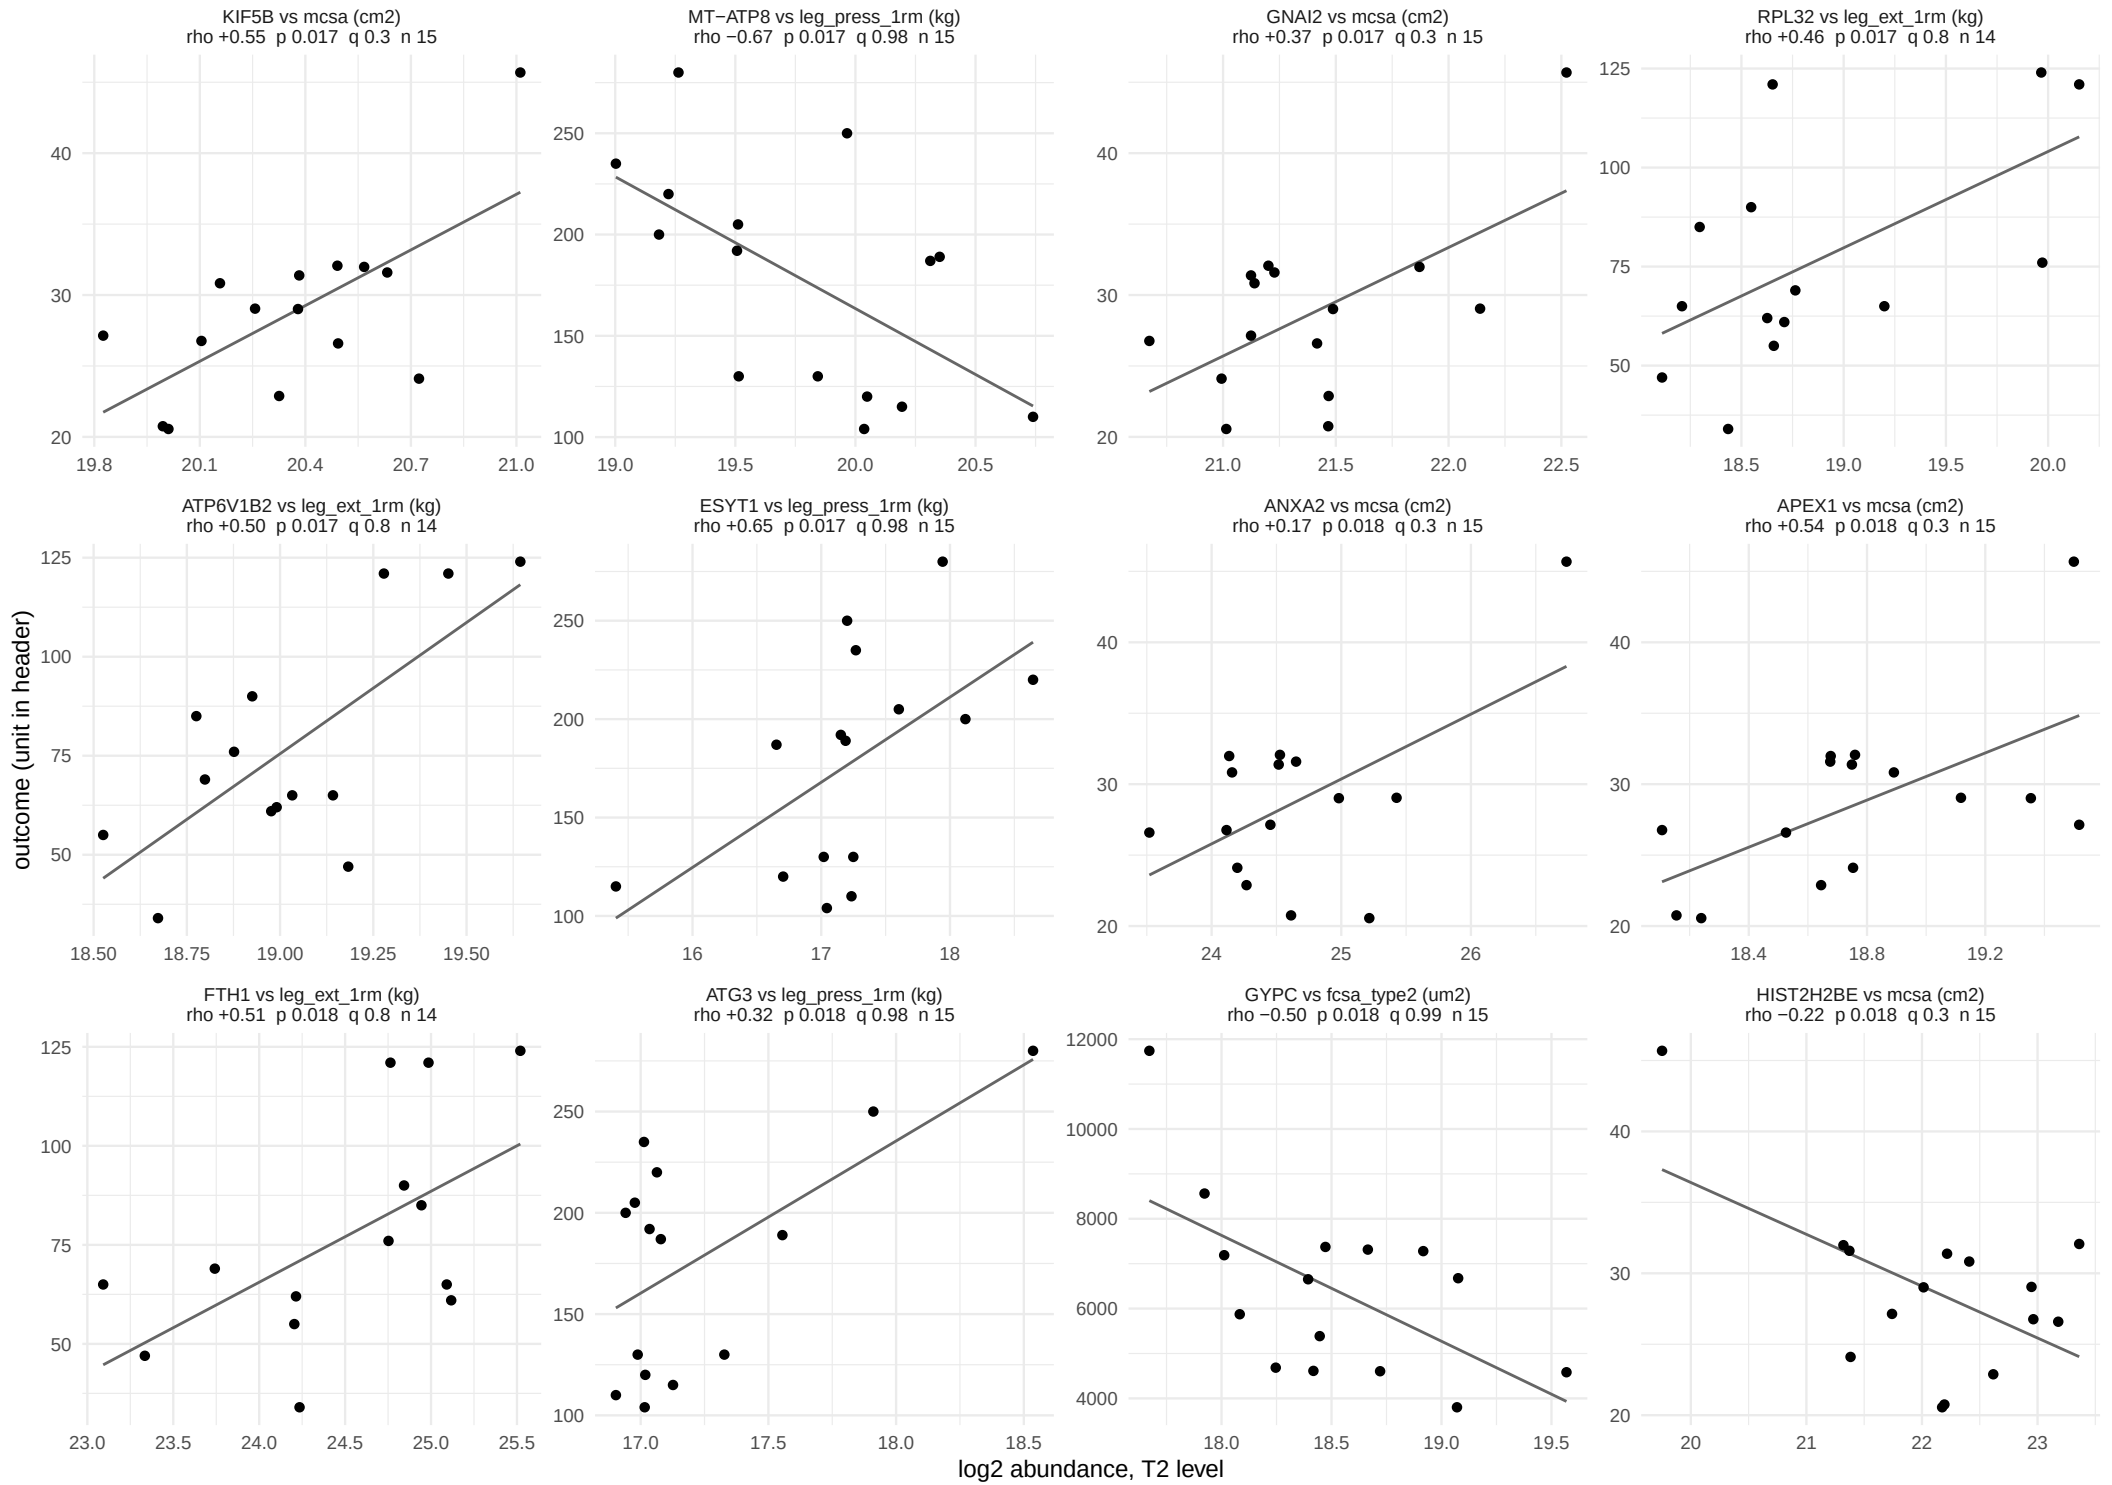

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, post_level window


555 of 11400 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 21 of 47.

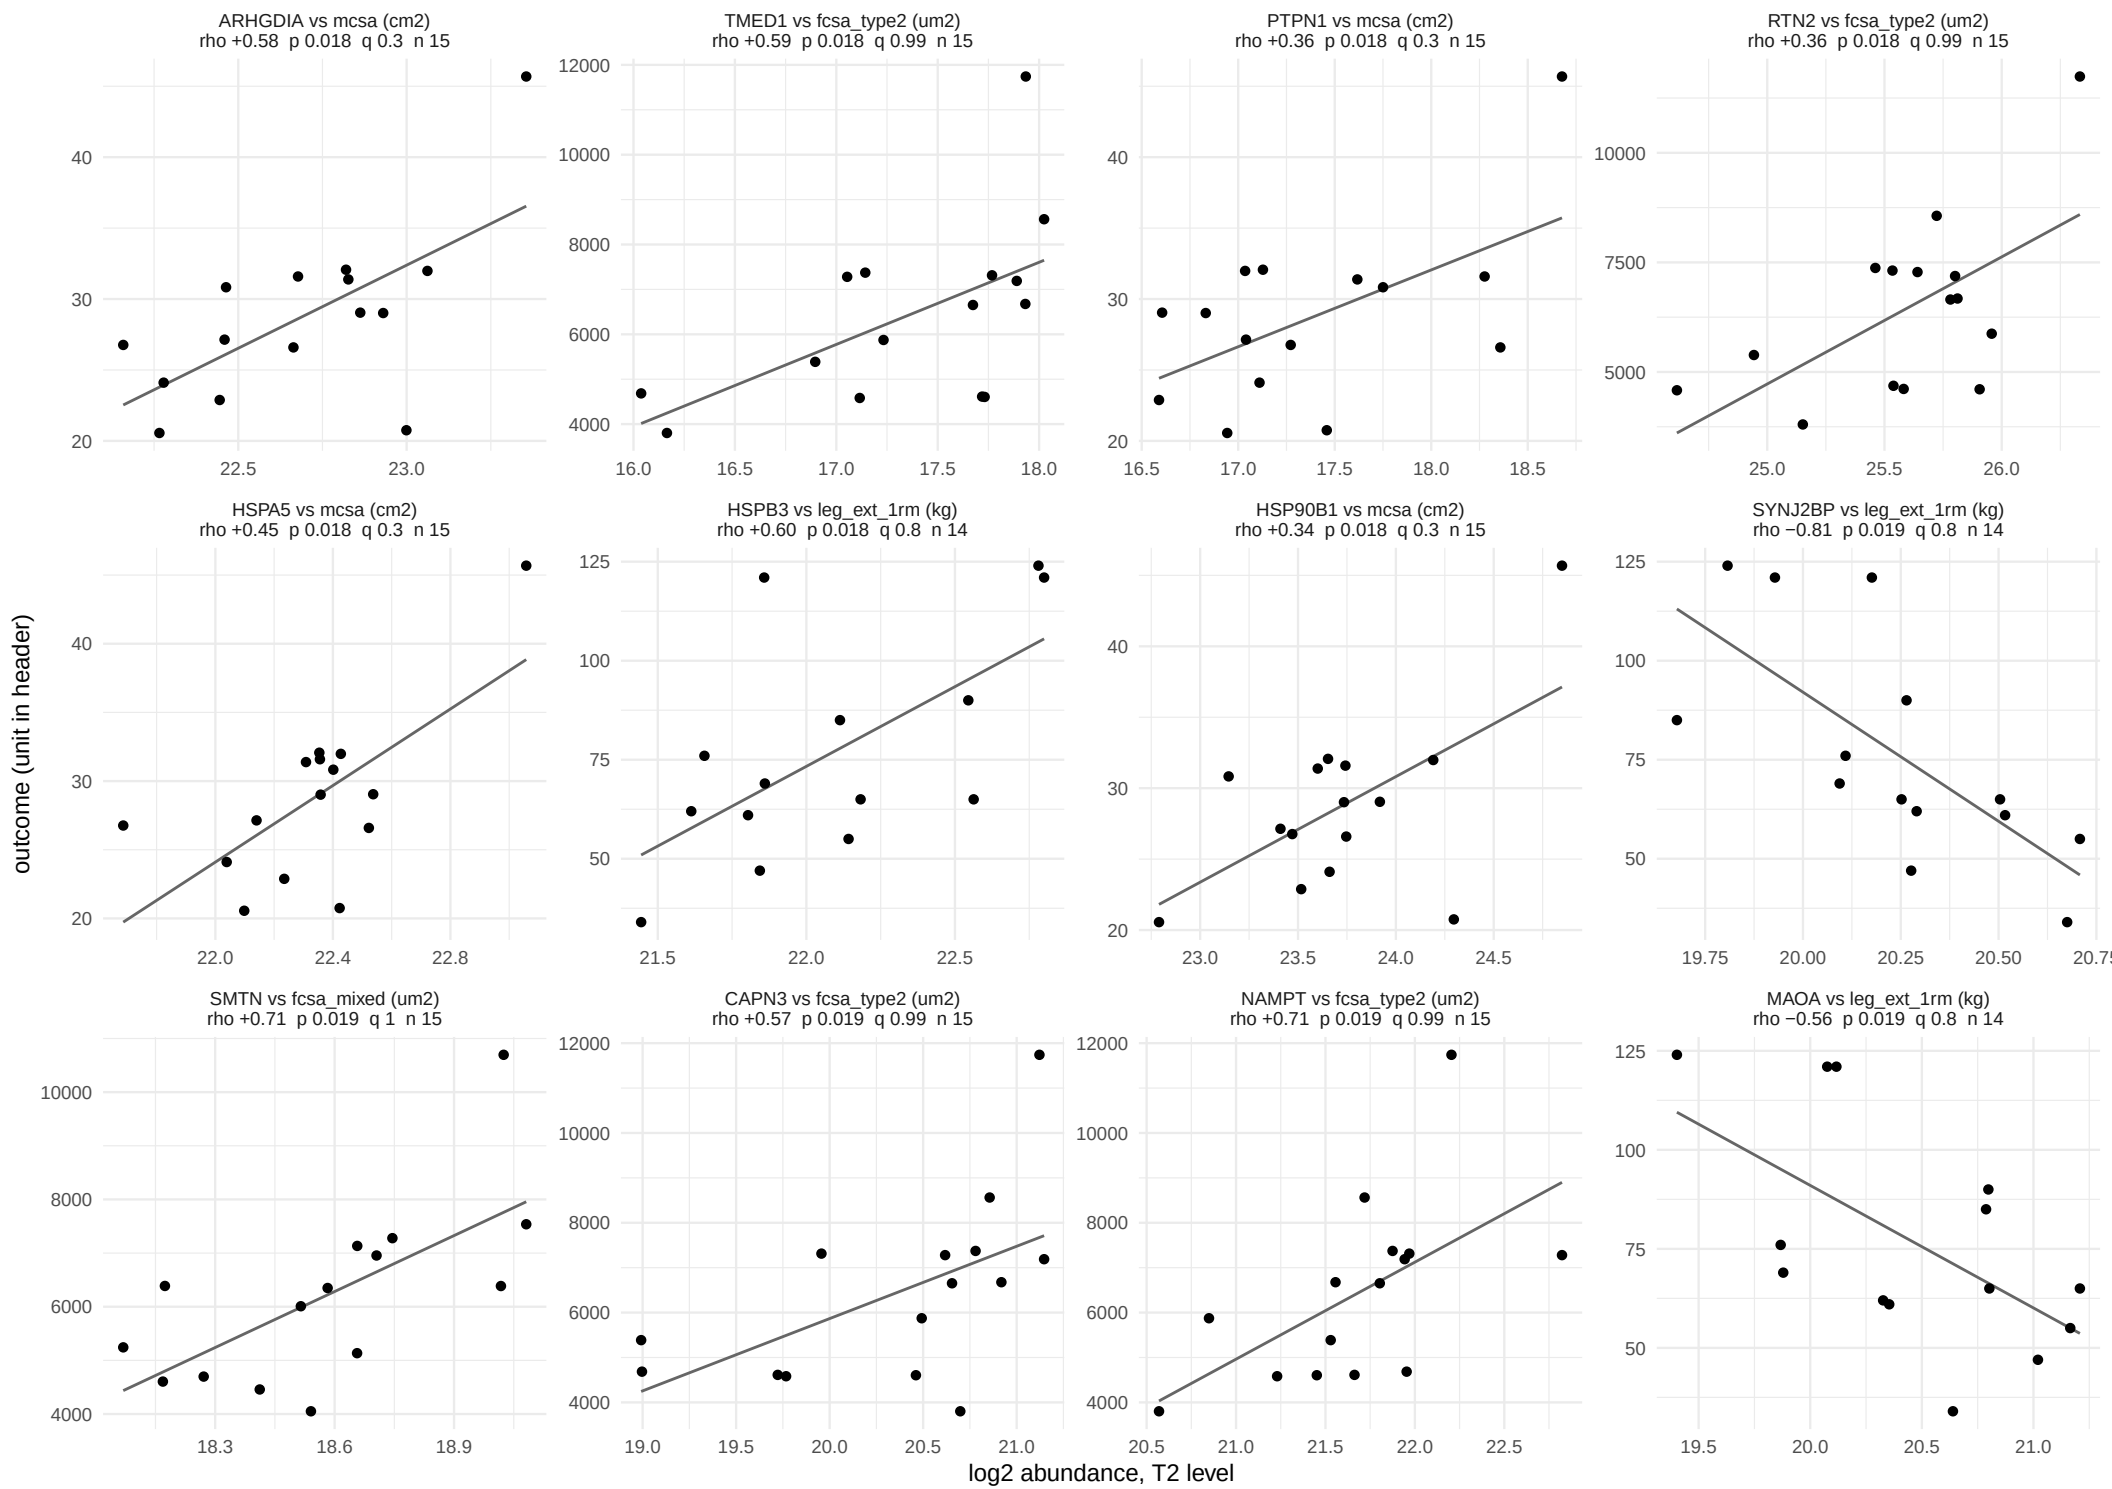

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, post_level window


555 of 11400 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 22 of 47.

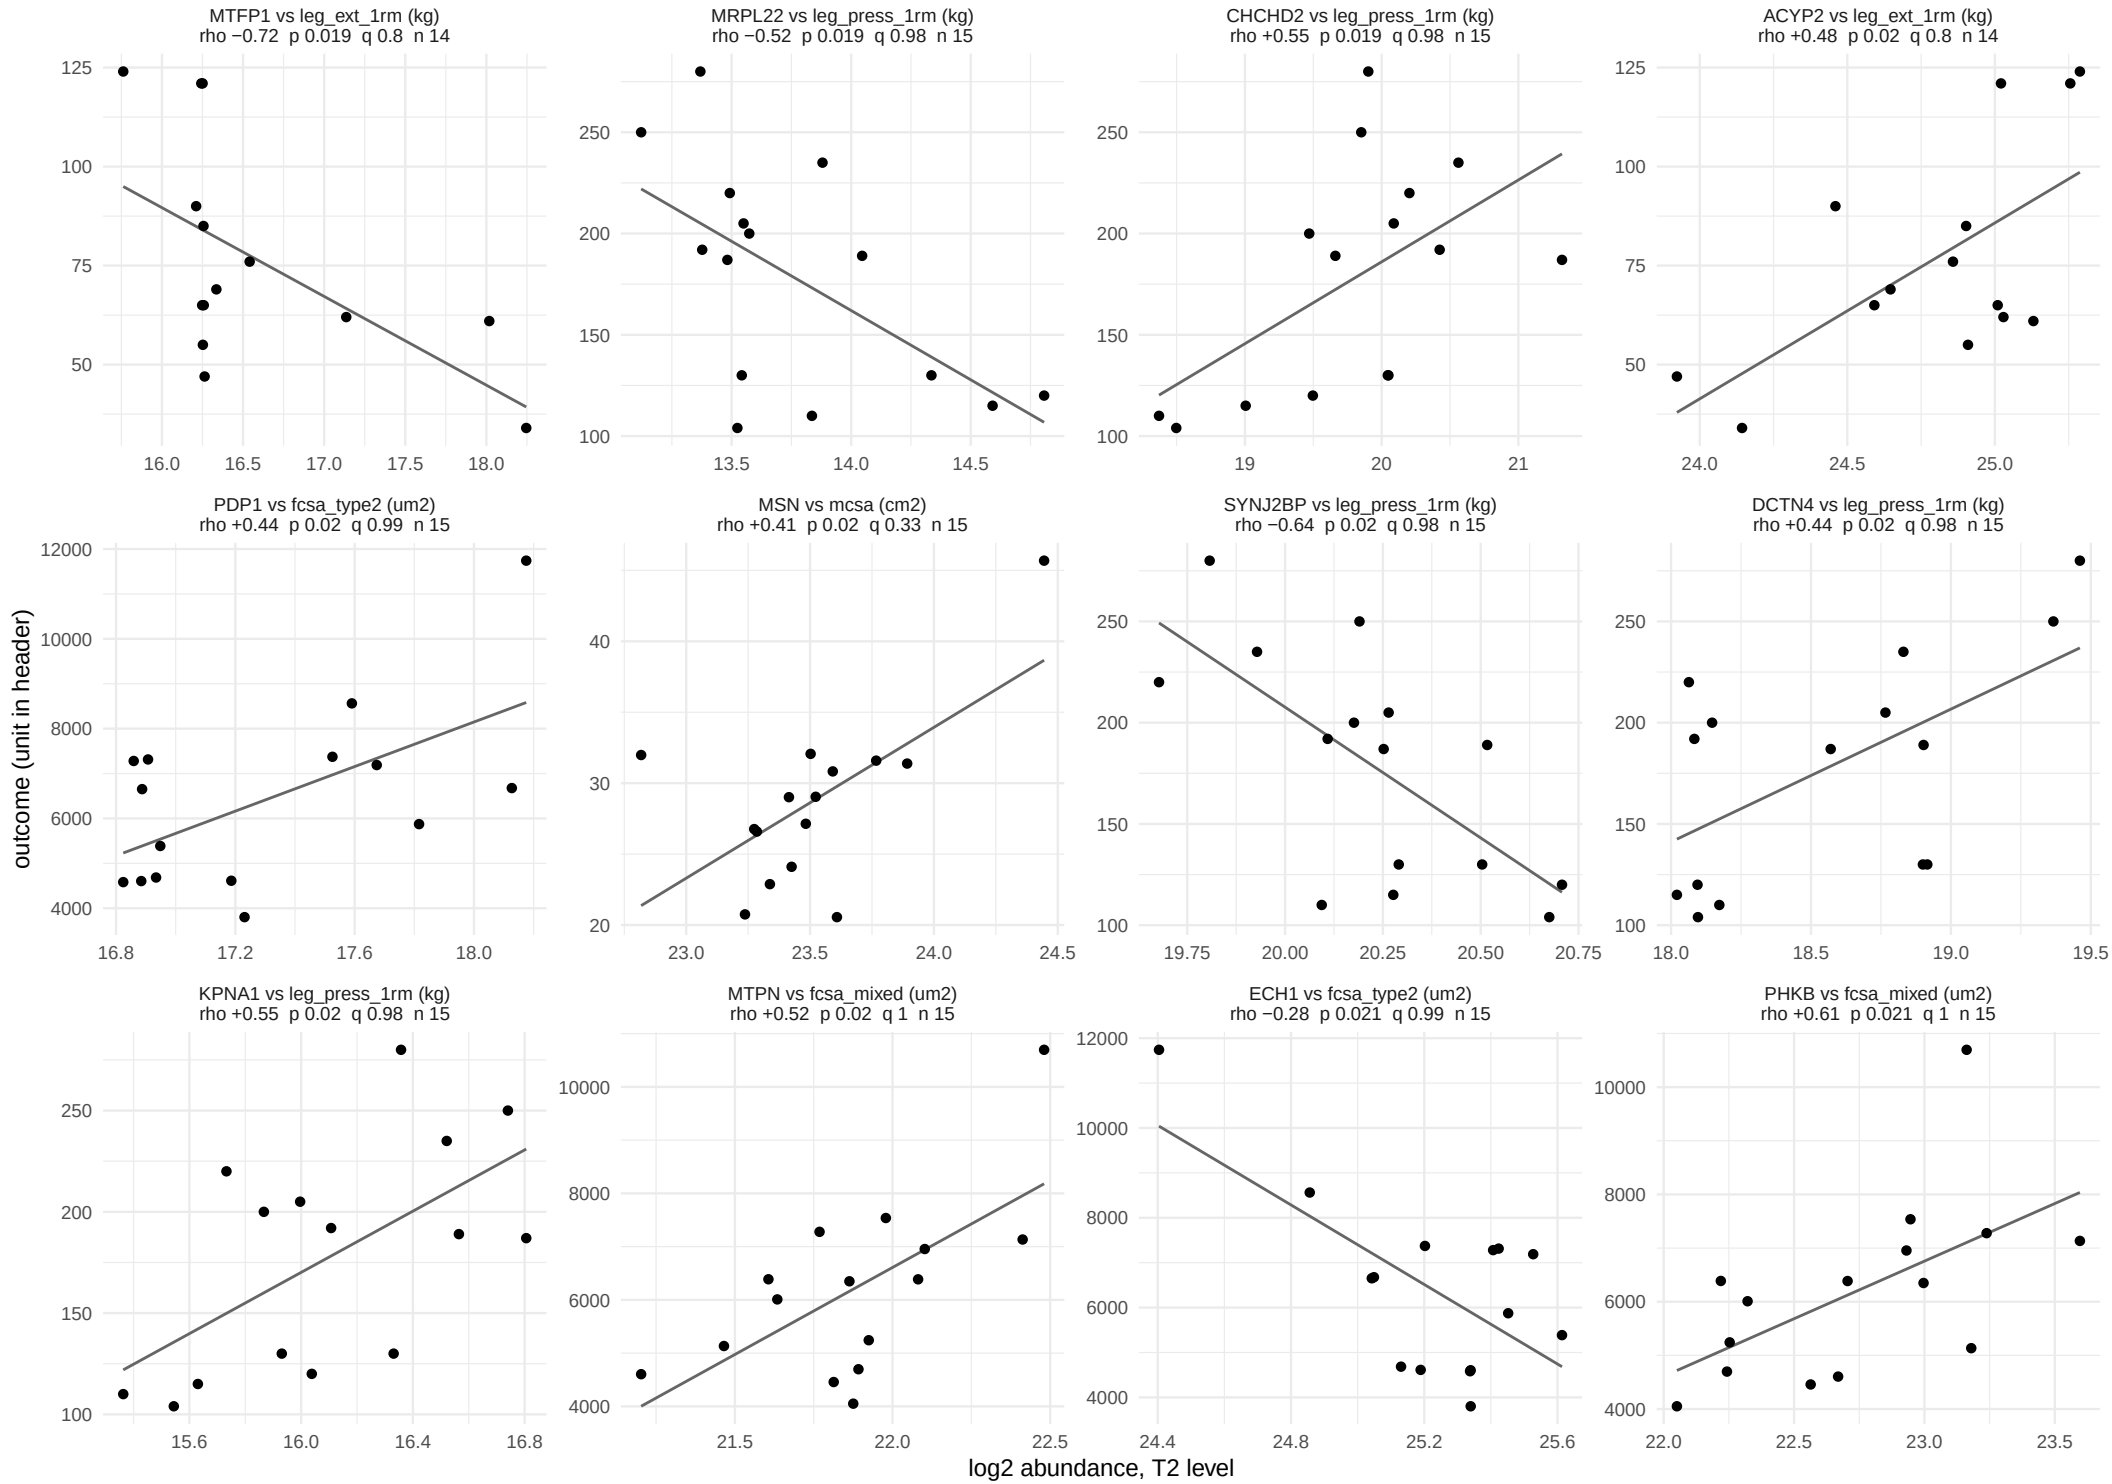

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, post_level window


555 of 11400 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 23 of 47.

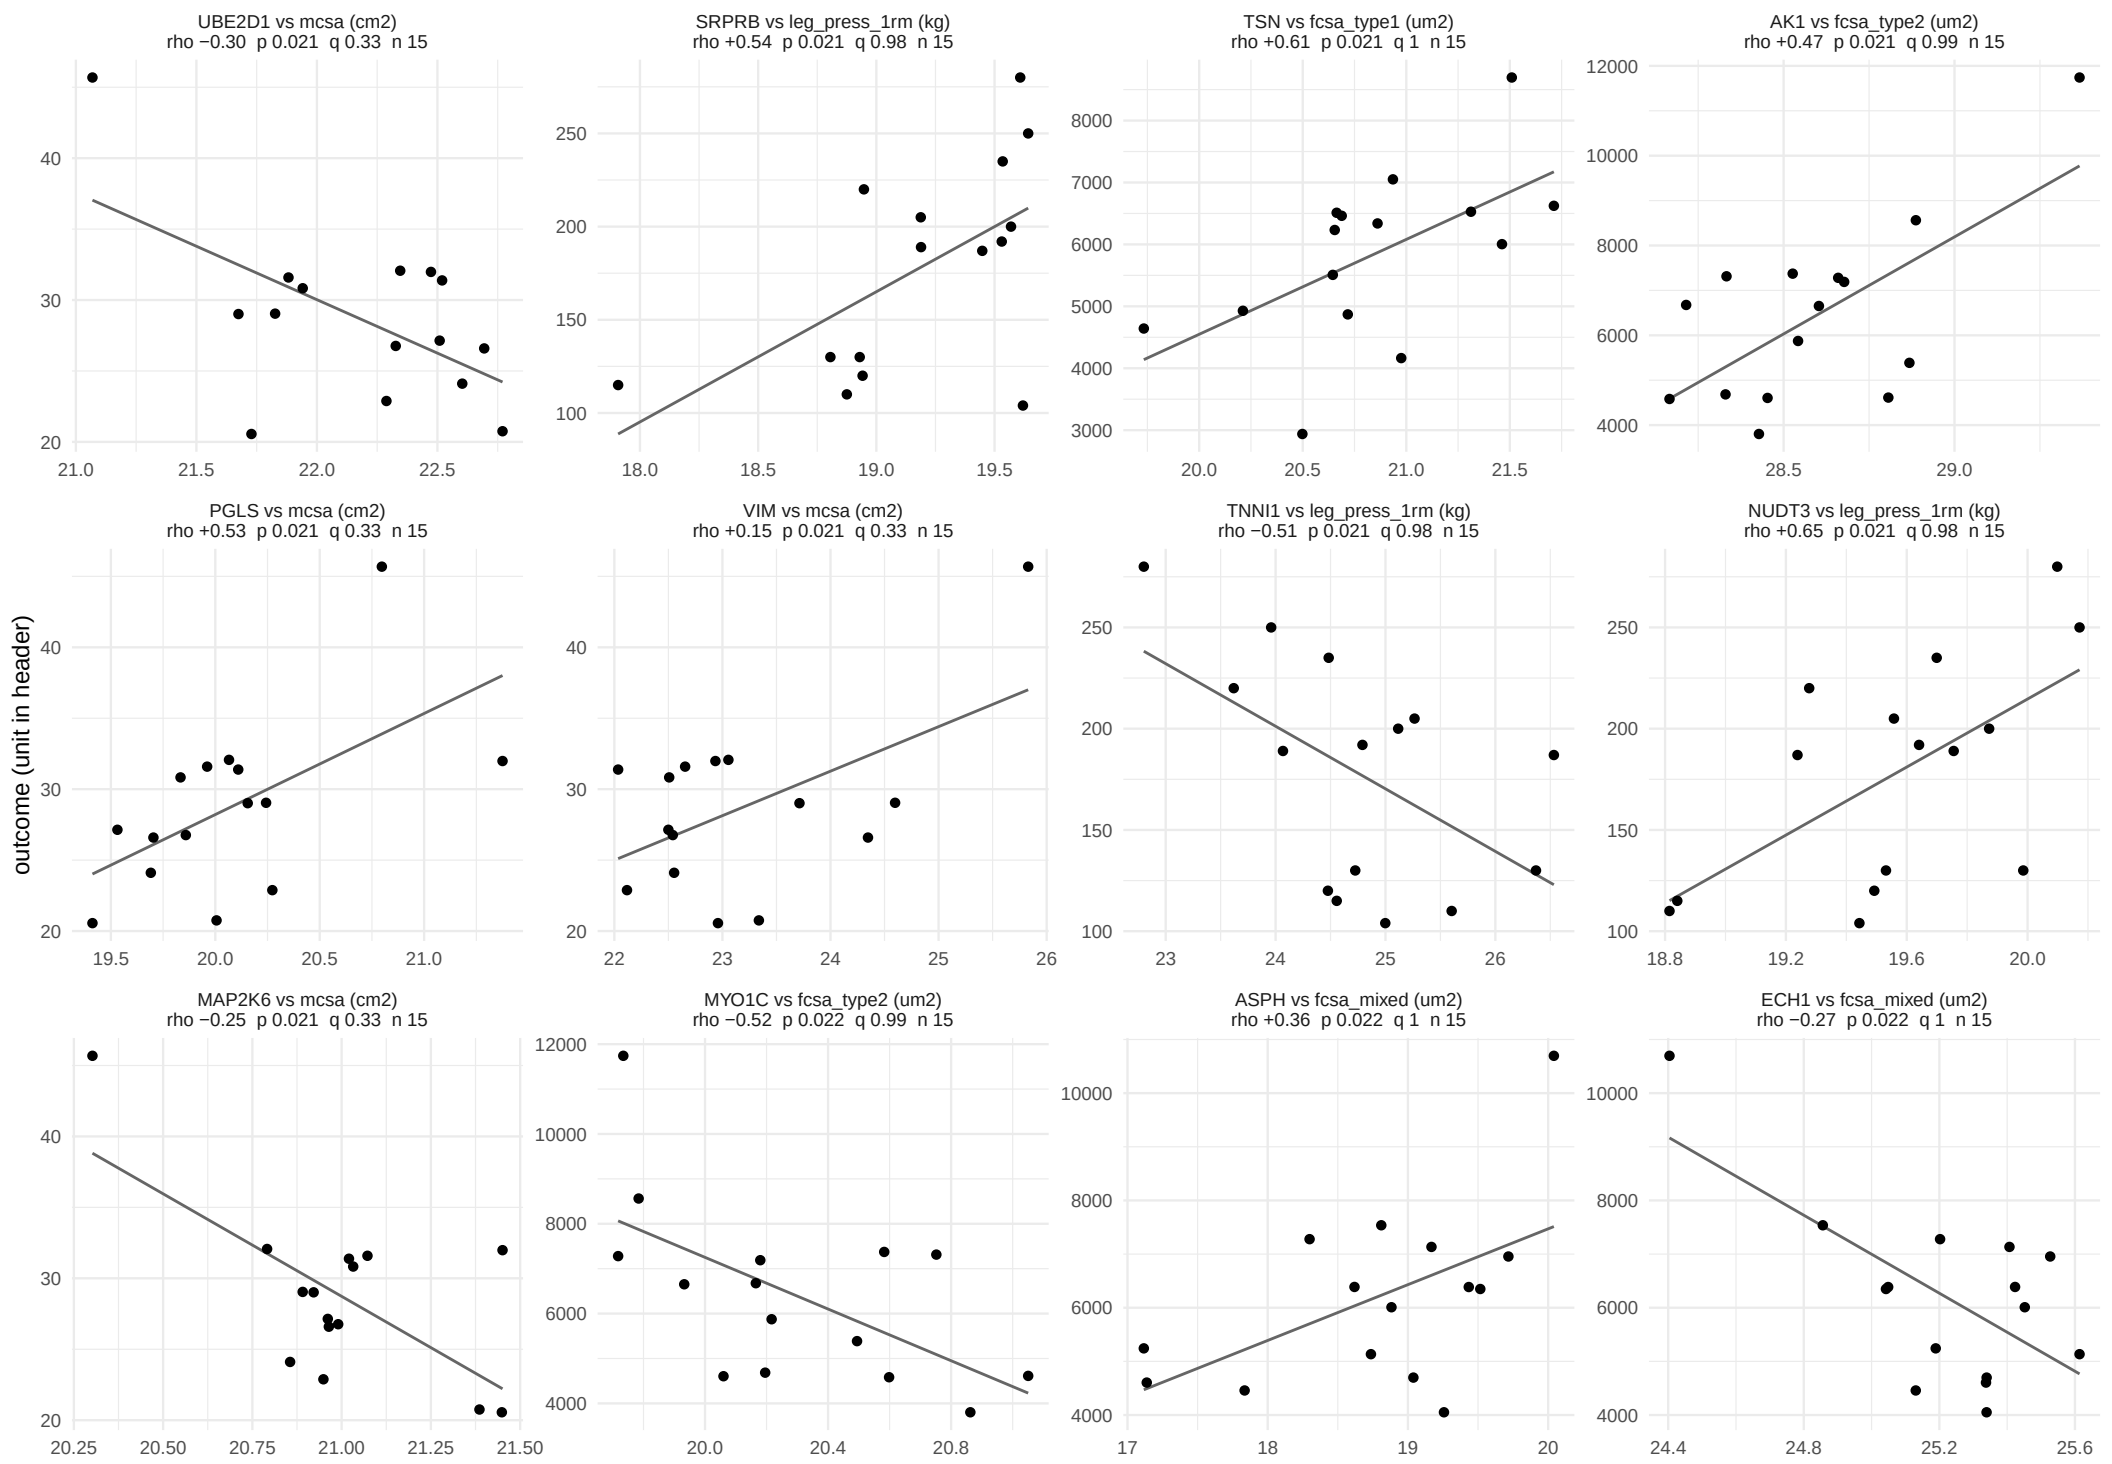

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, post_level window


555 of 11400 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 24 of 47.

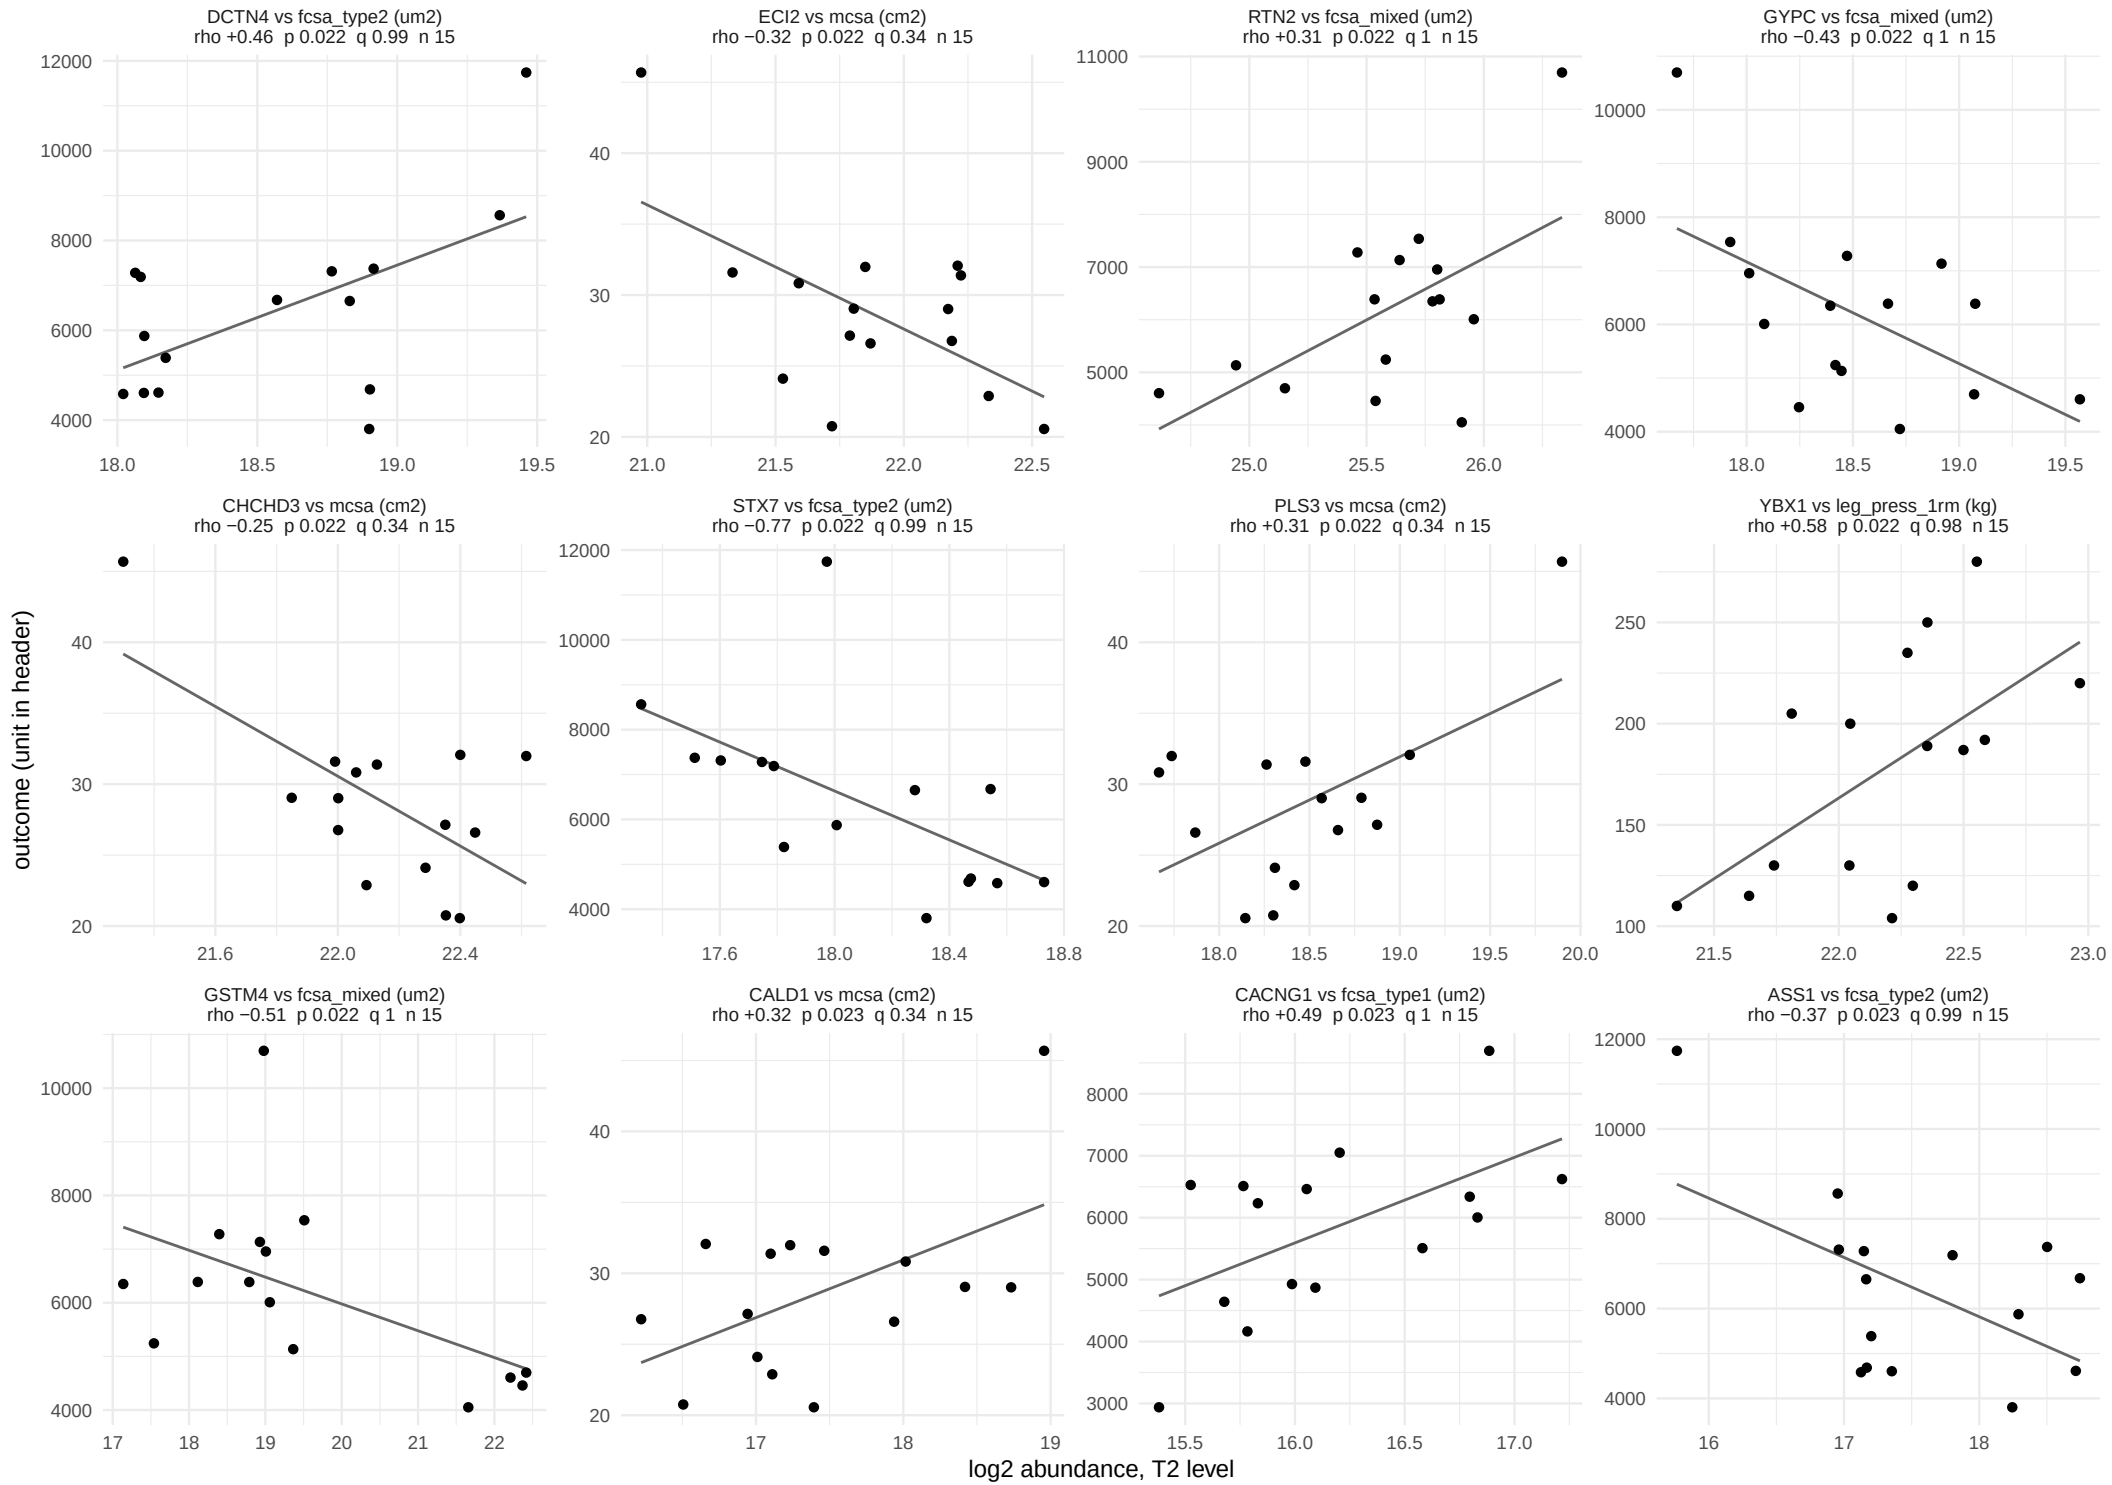

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, post_level window


555 of 11400 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 25 of 47.

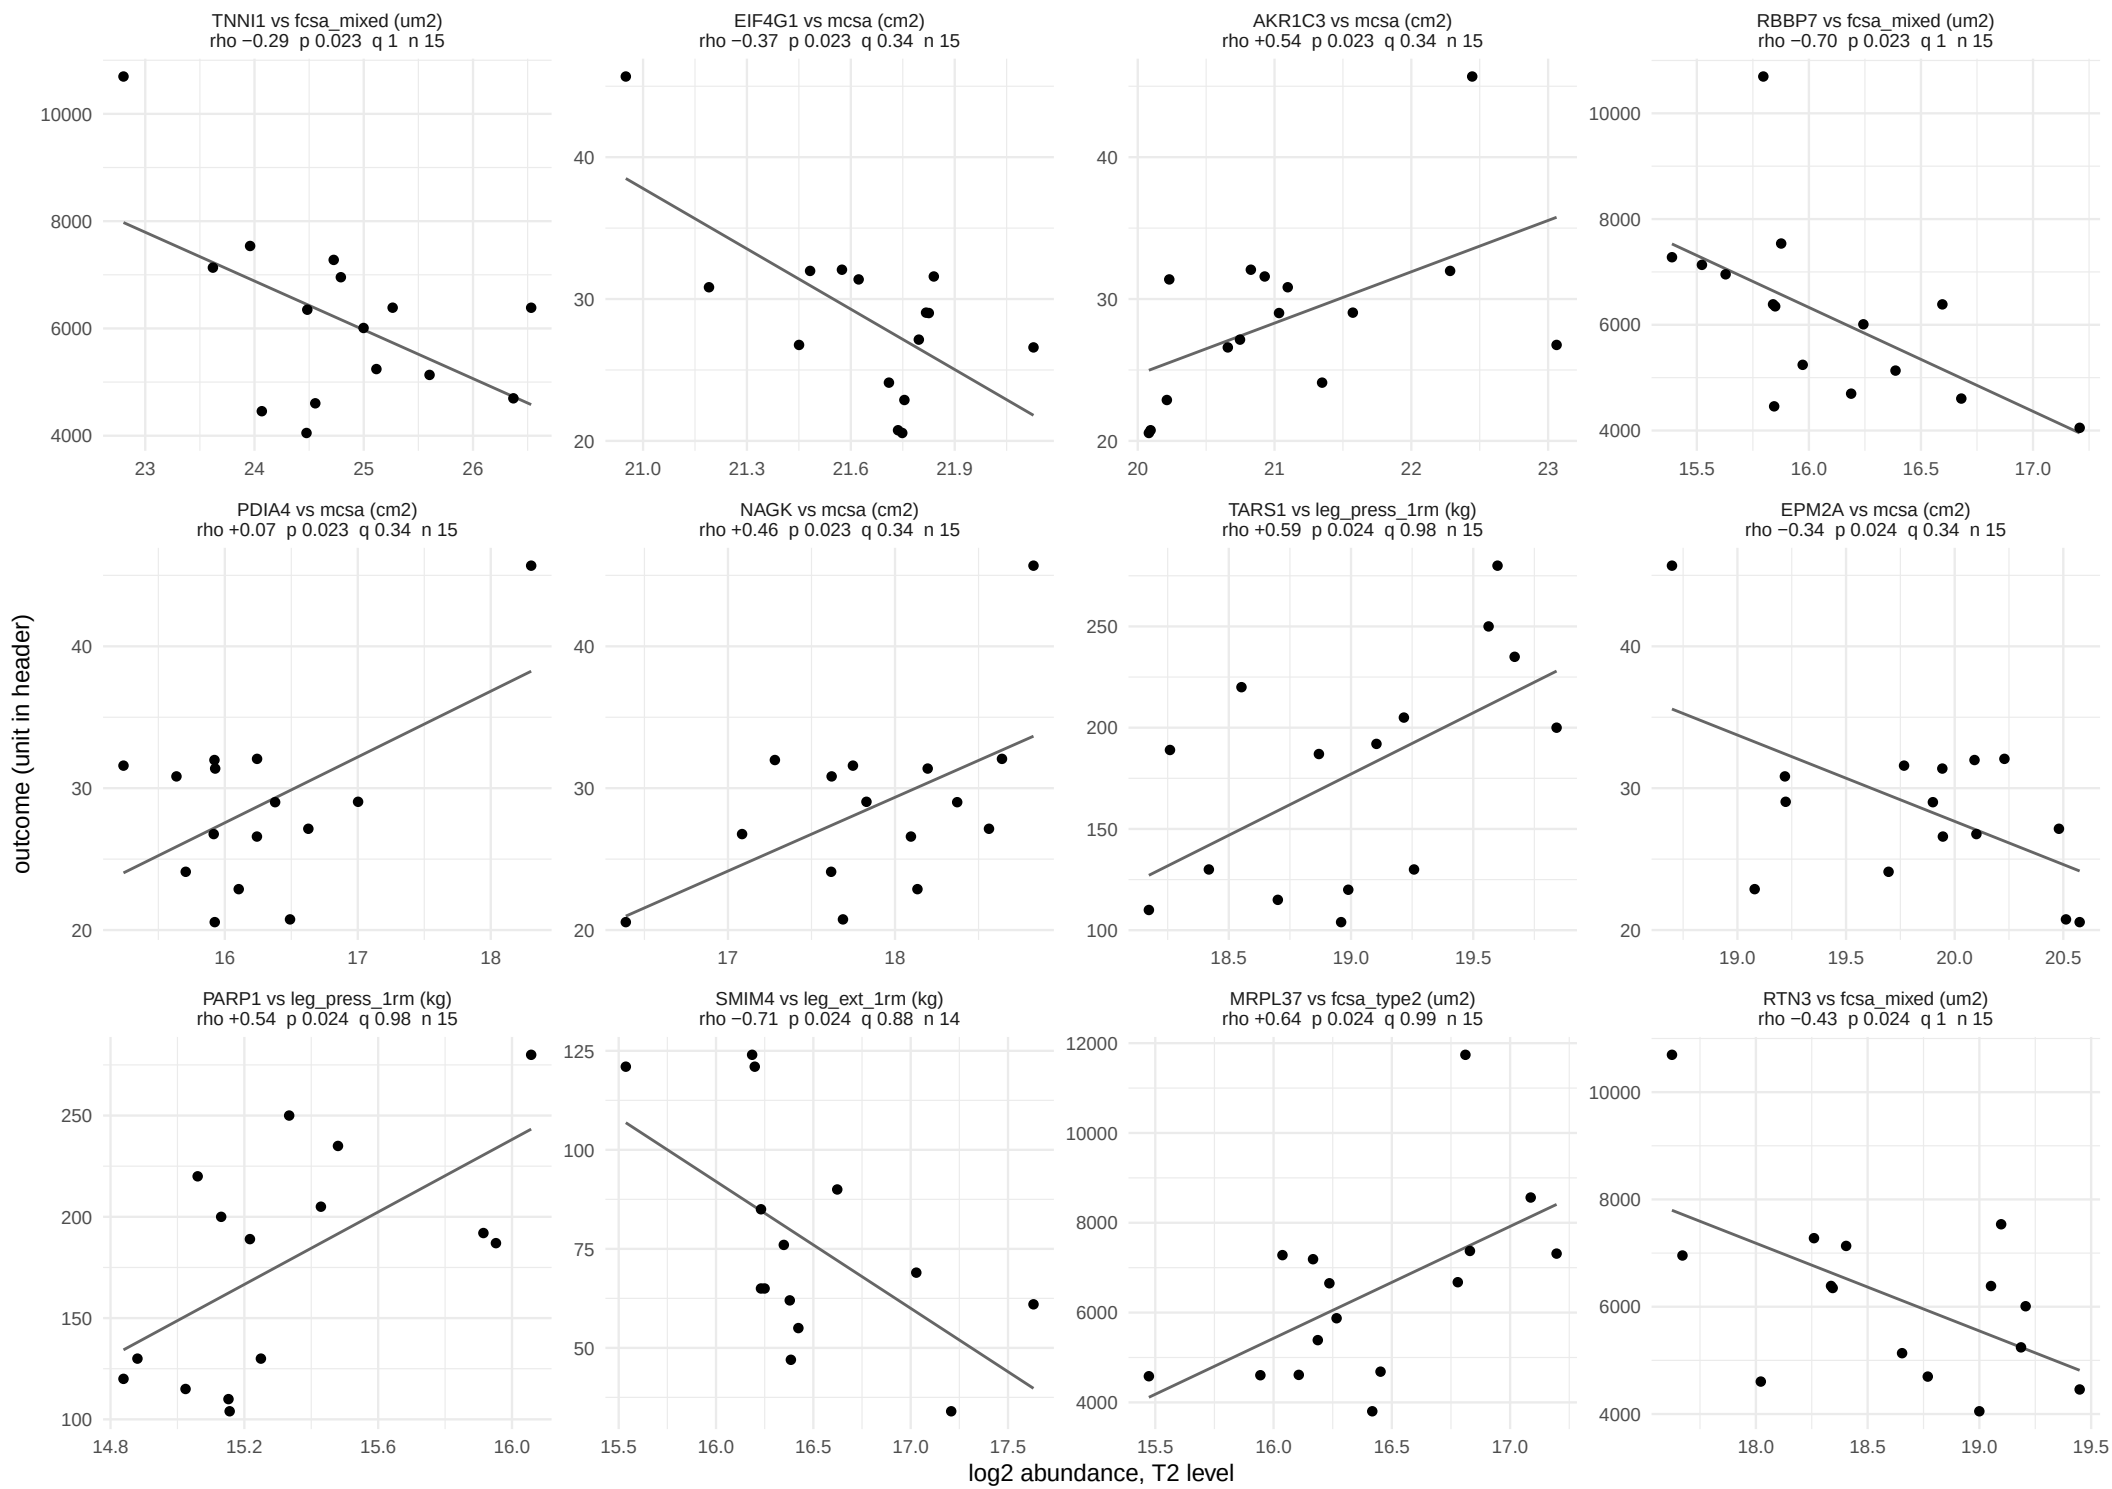

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, post_level window


555 of 11400 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 26 of 47.

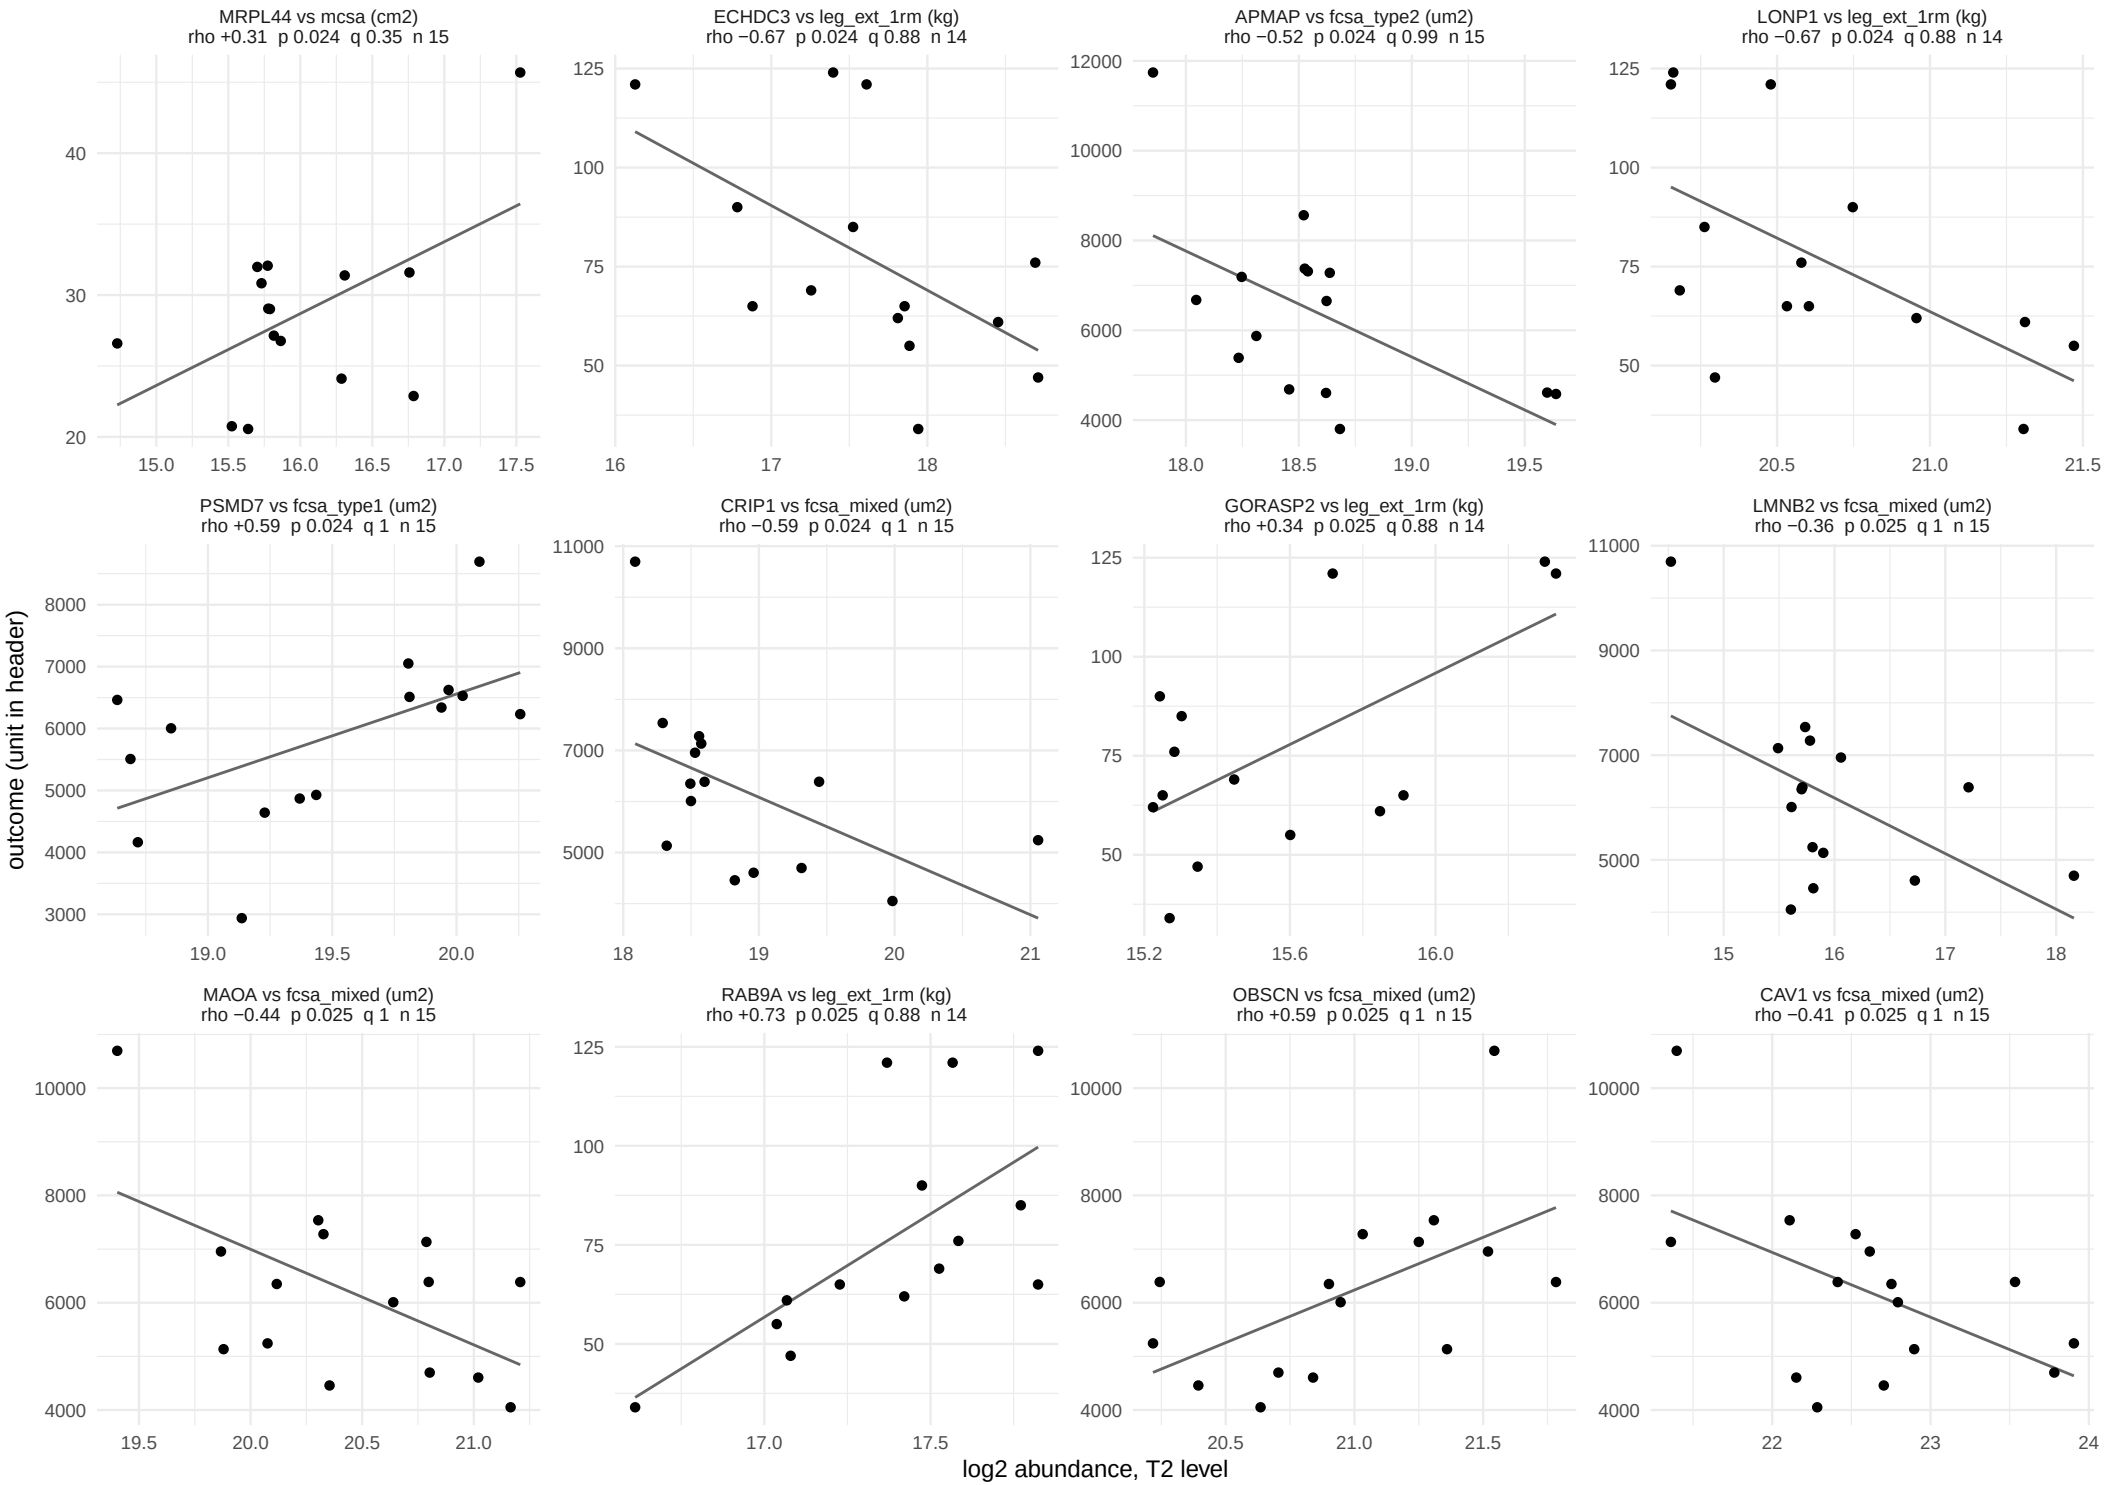

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, post_level window


555 of 11400 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 27 of 47.

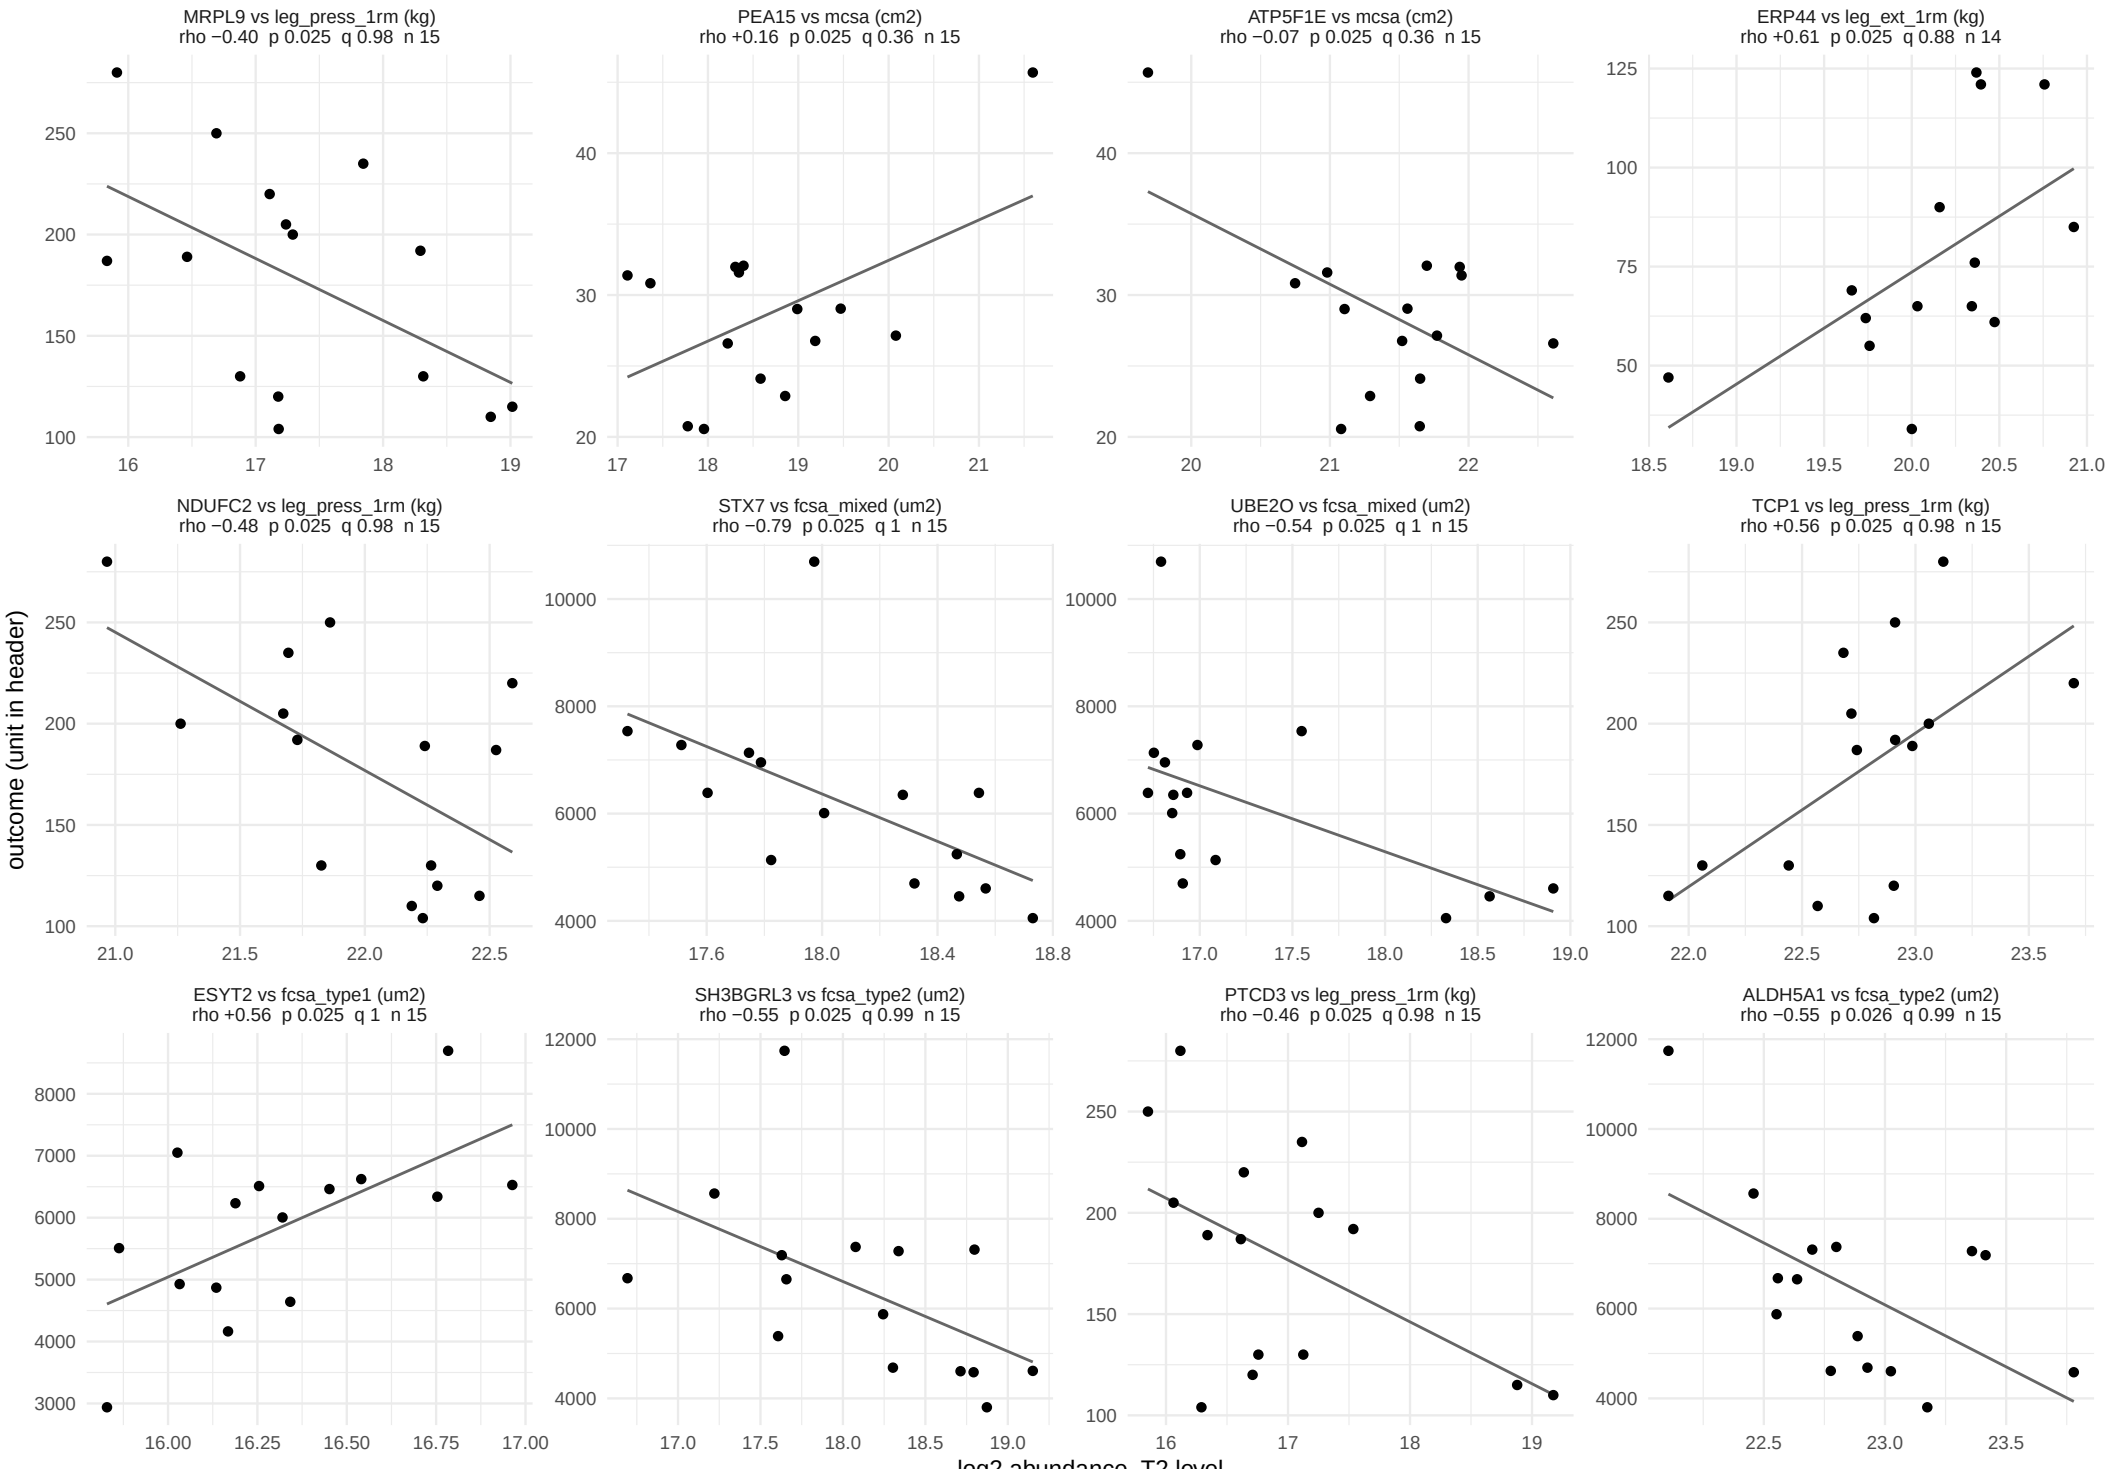

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, post_level window


555 of 11400 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 28 of 47.

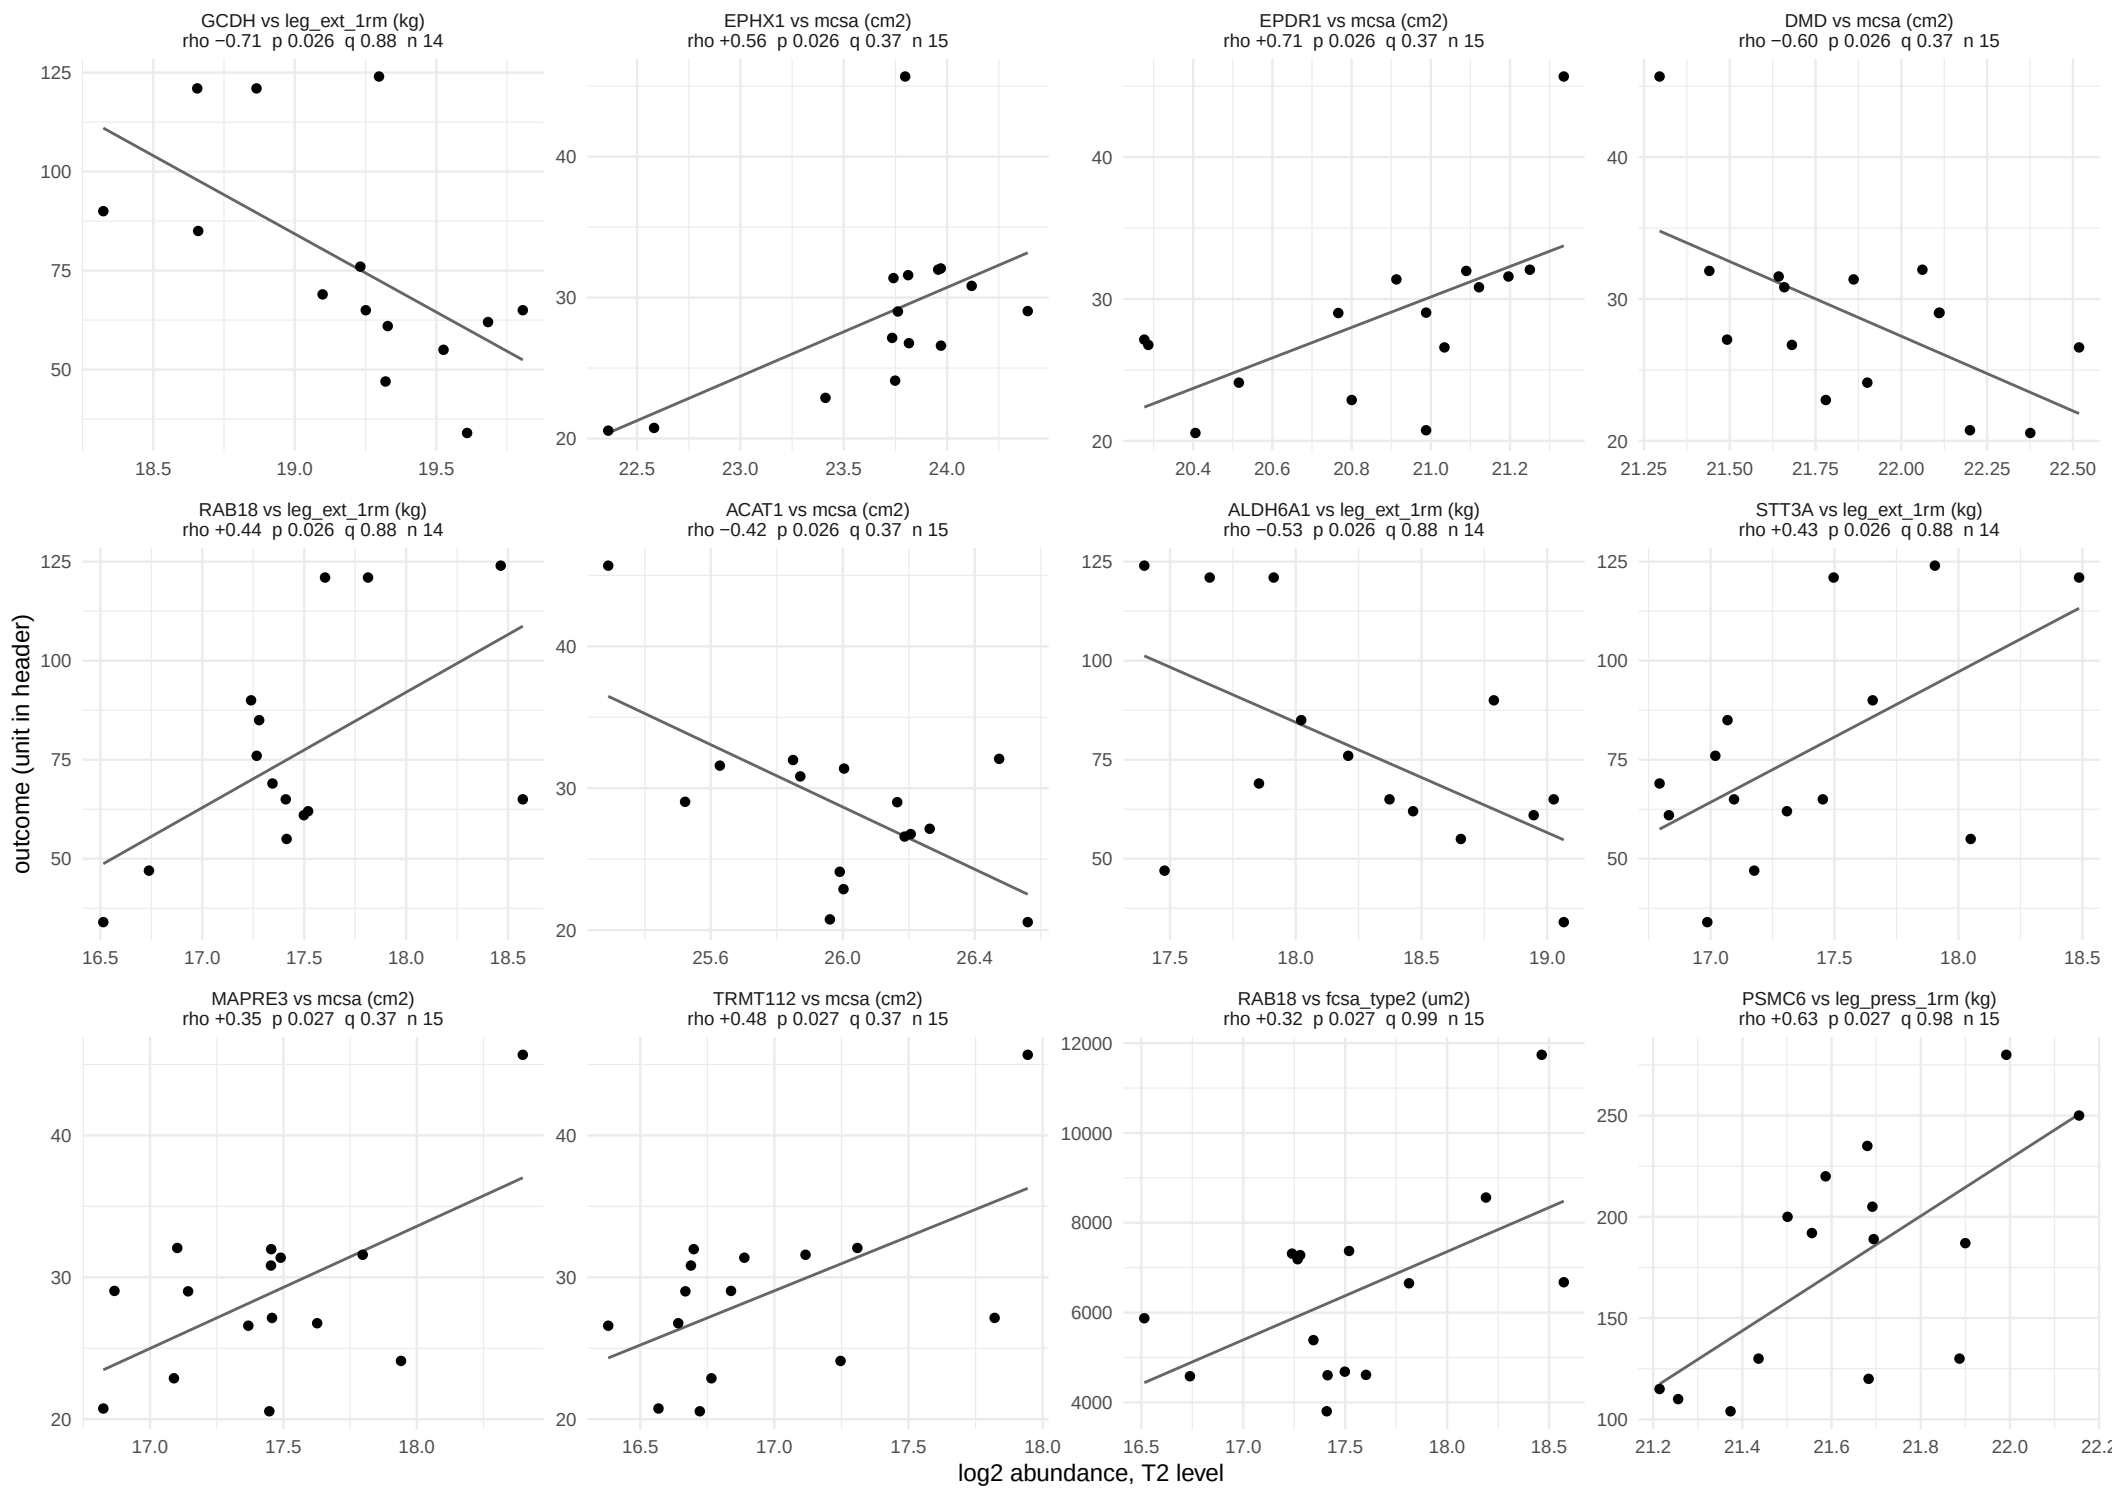

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, post_level window


555 of 11400 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 29 of 47.

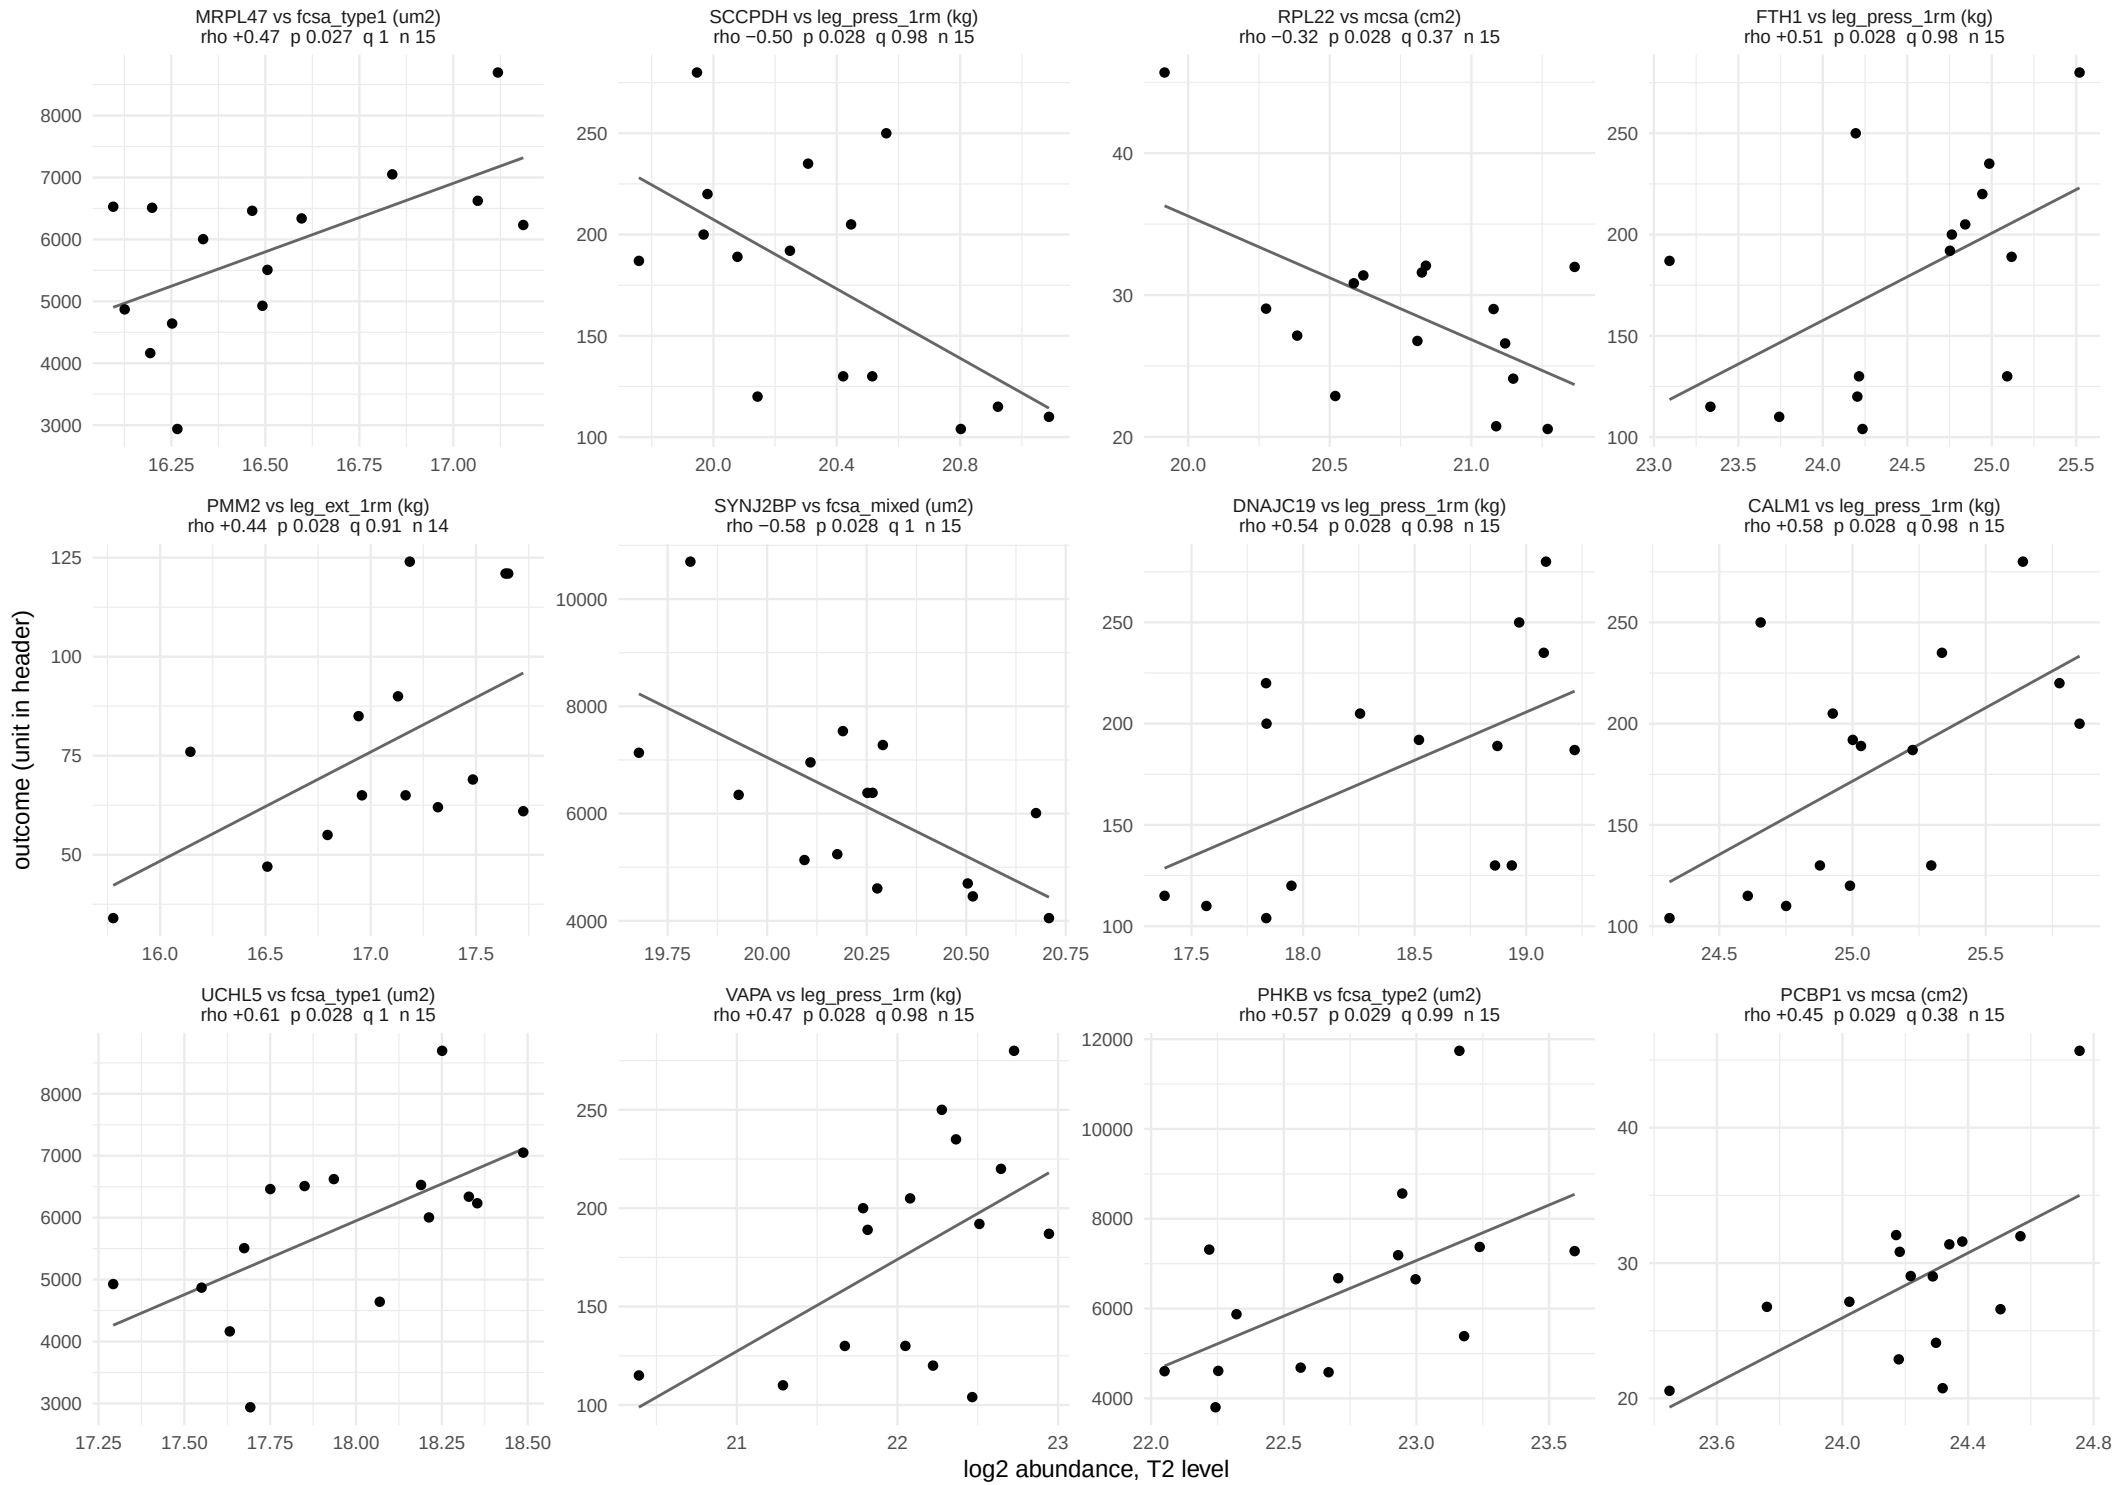

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, post_level window


555 of 11400 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 30 of 47.

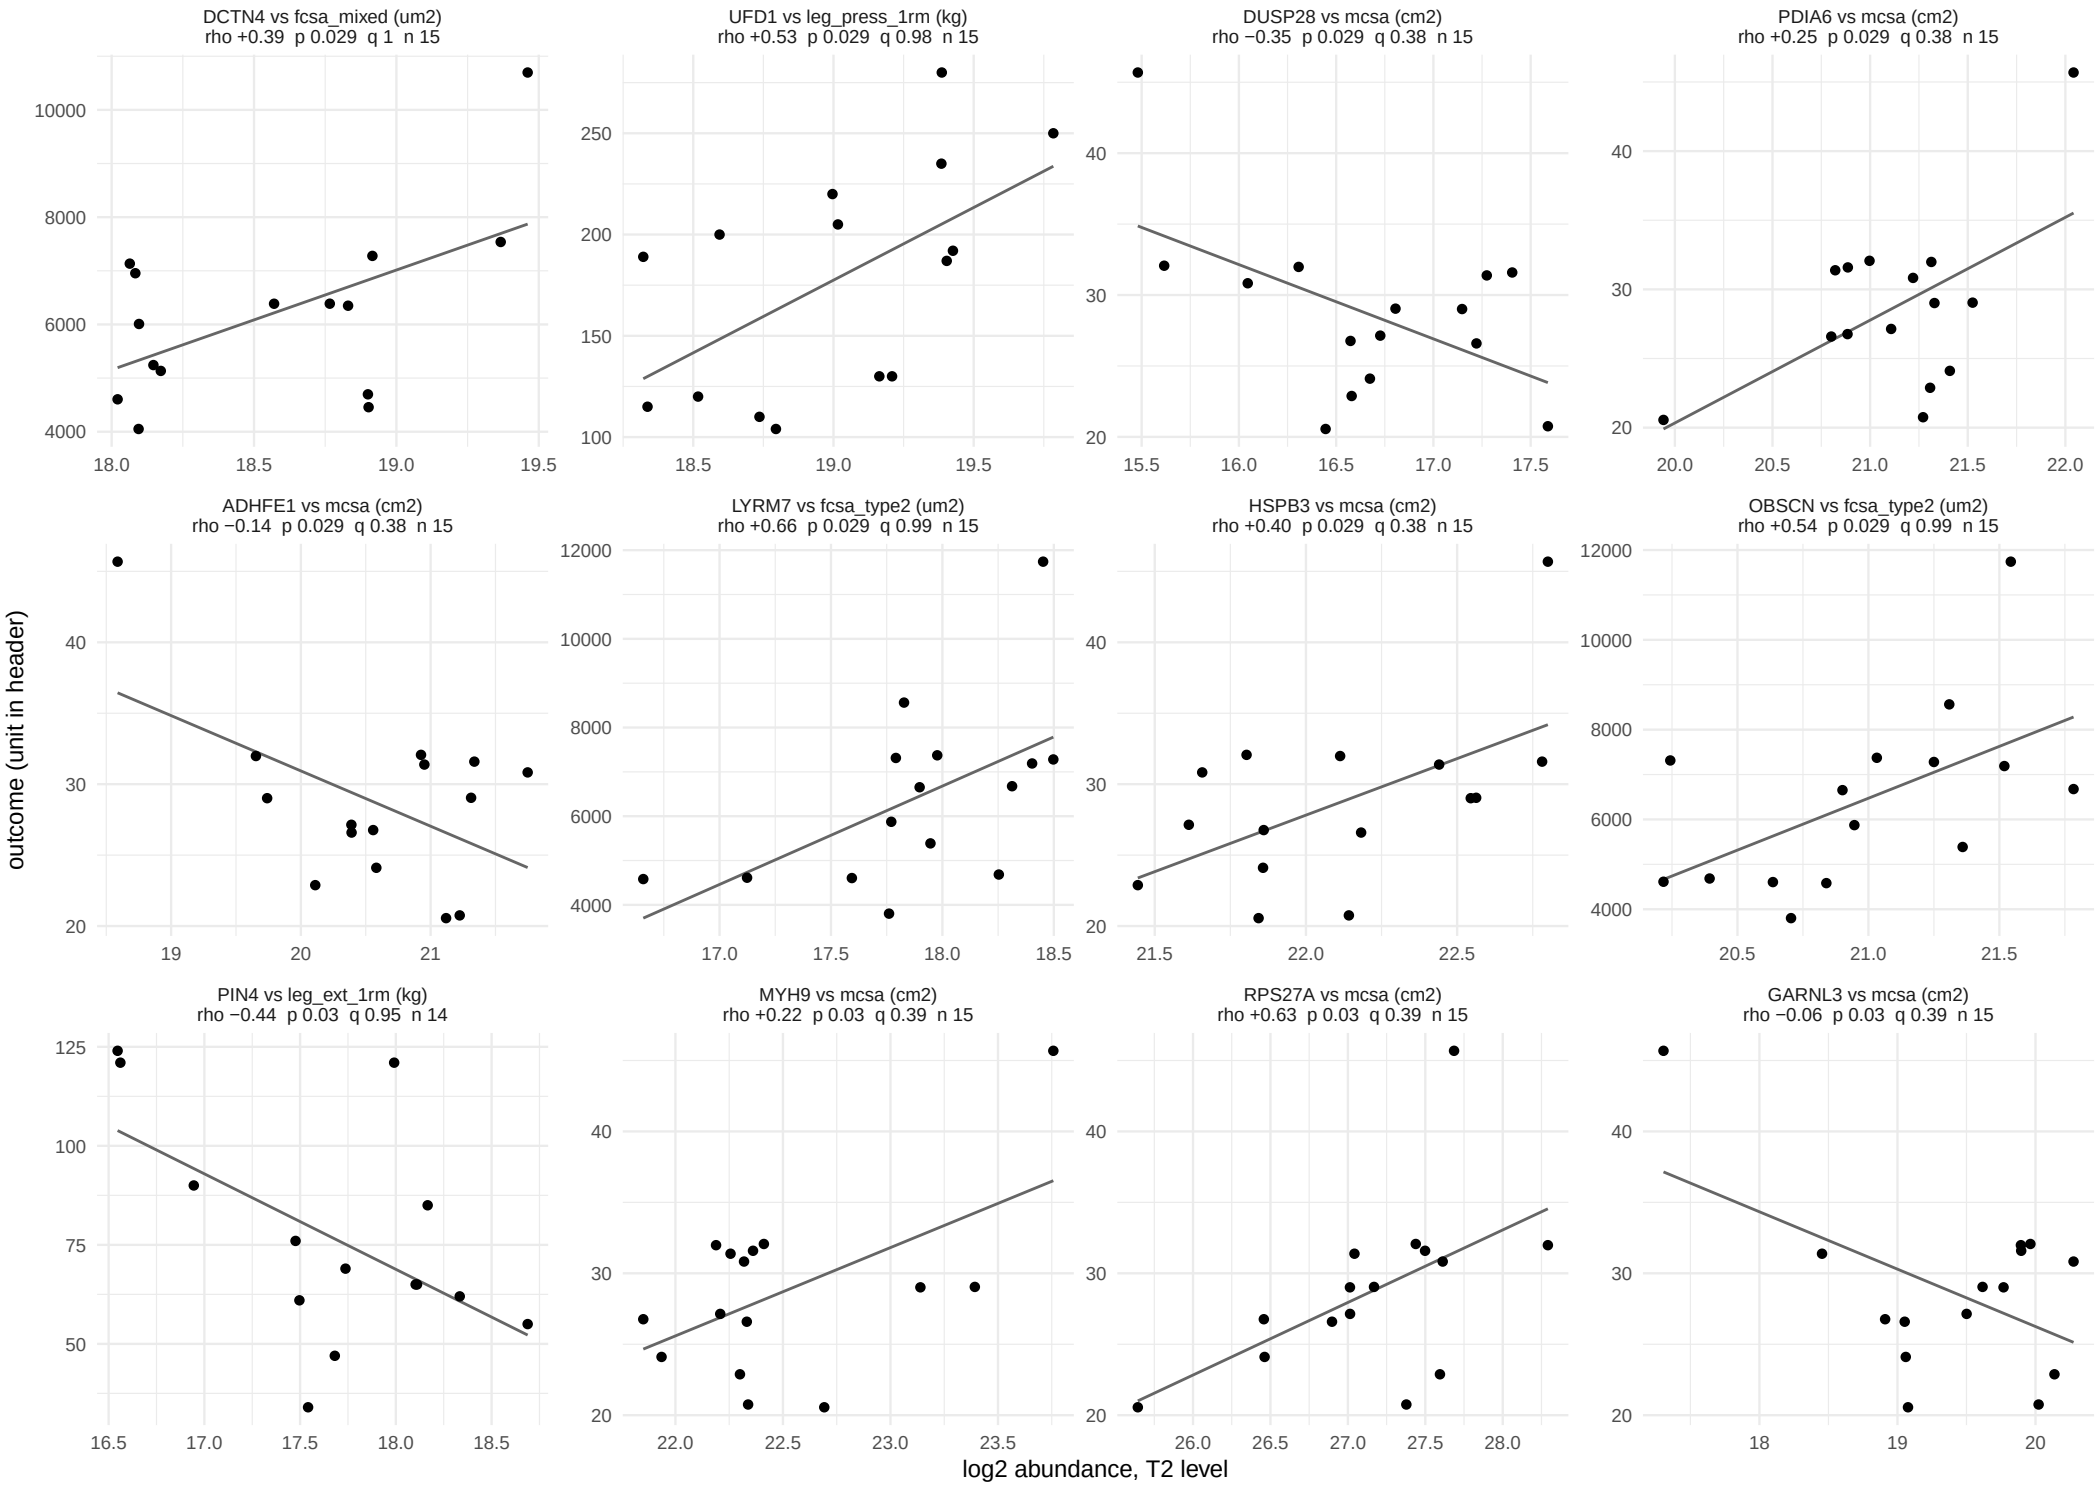

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, post_level window


555 of 11400 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 31 of 47.

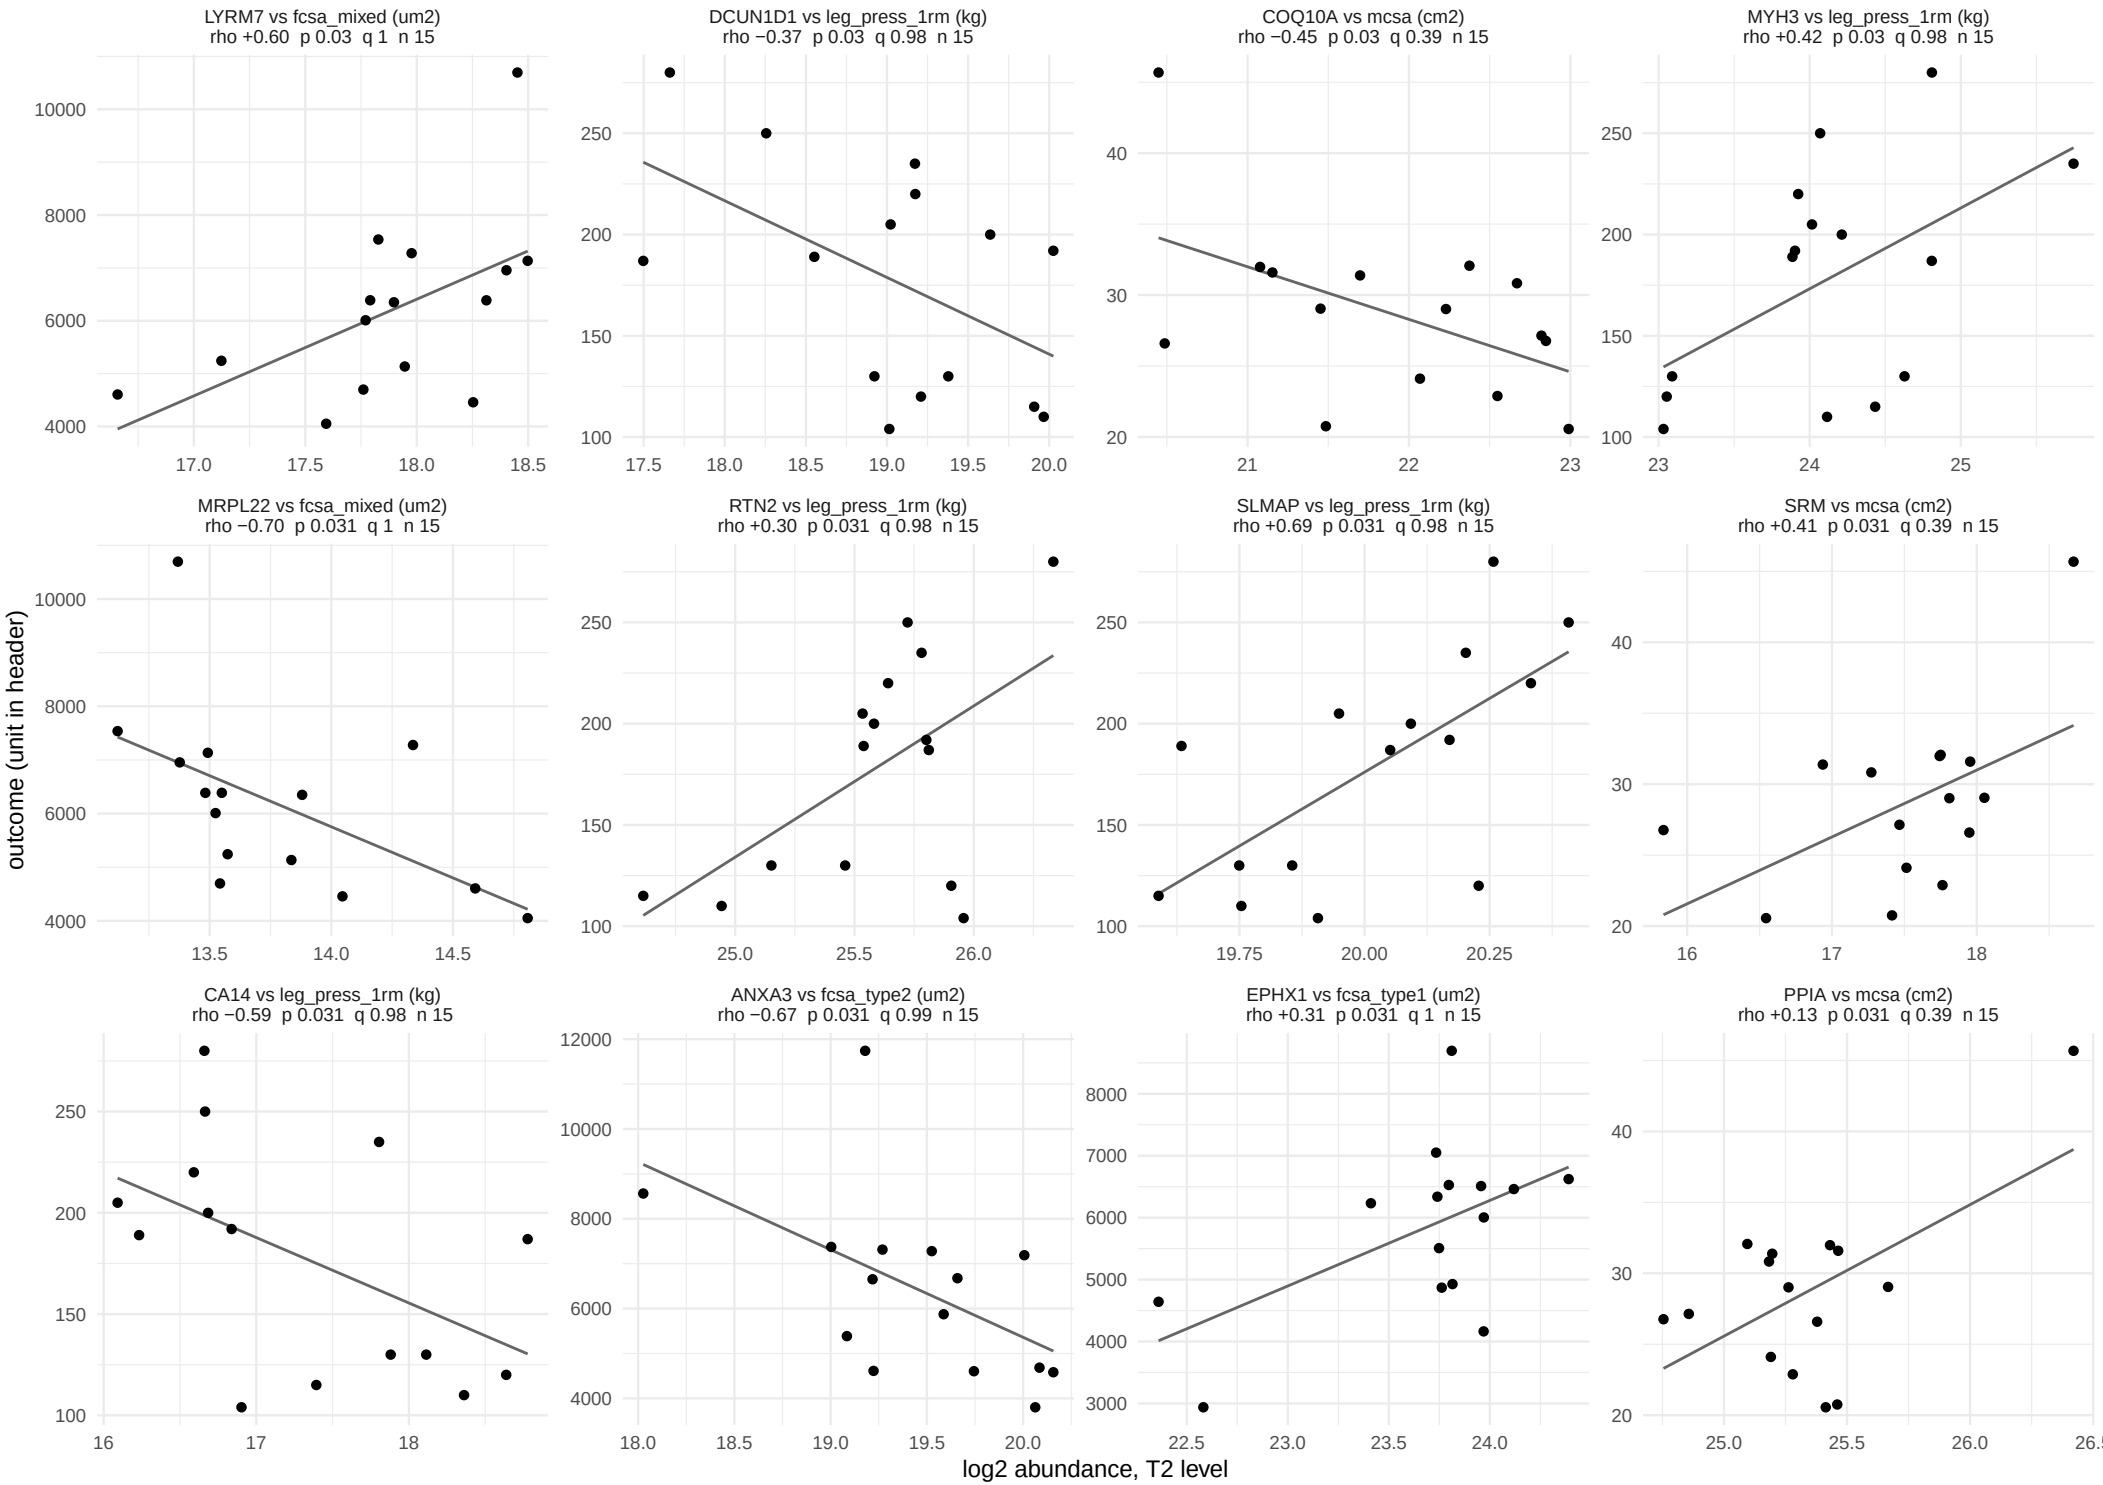

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, post_level window


555 of 11400 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 32 of 47.

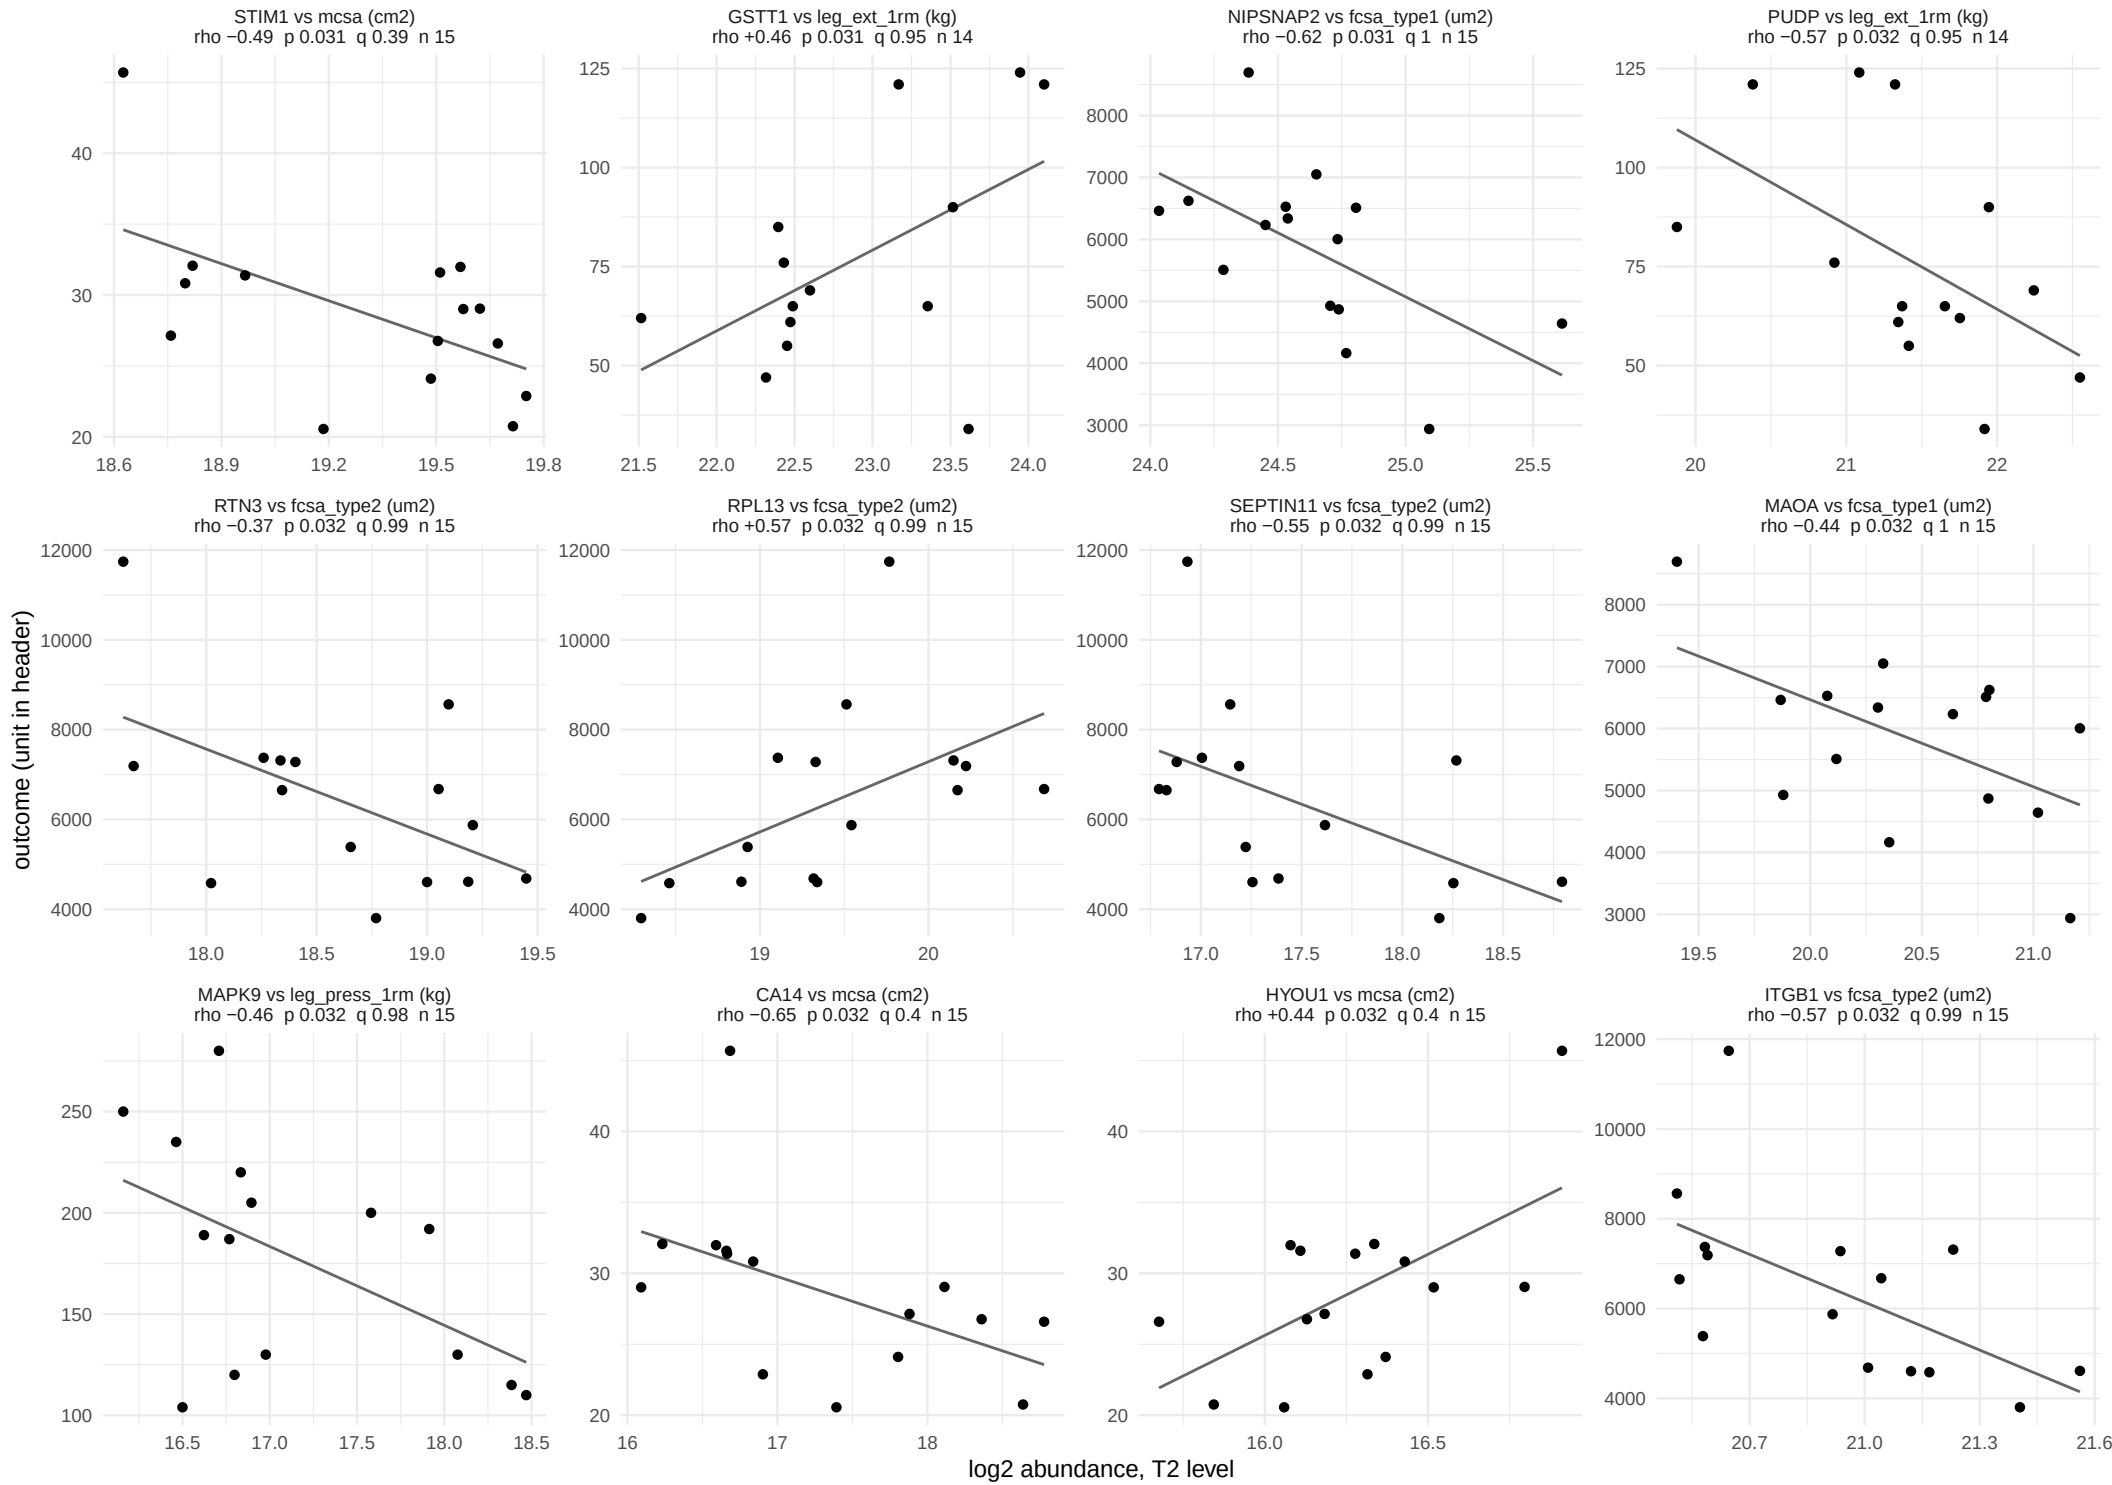

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, post_level window


555 of 11400 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 33 of 47.

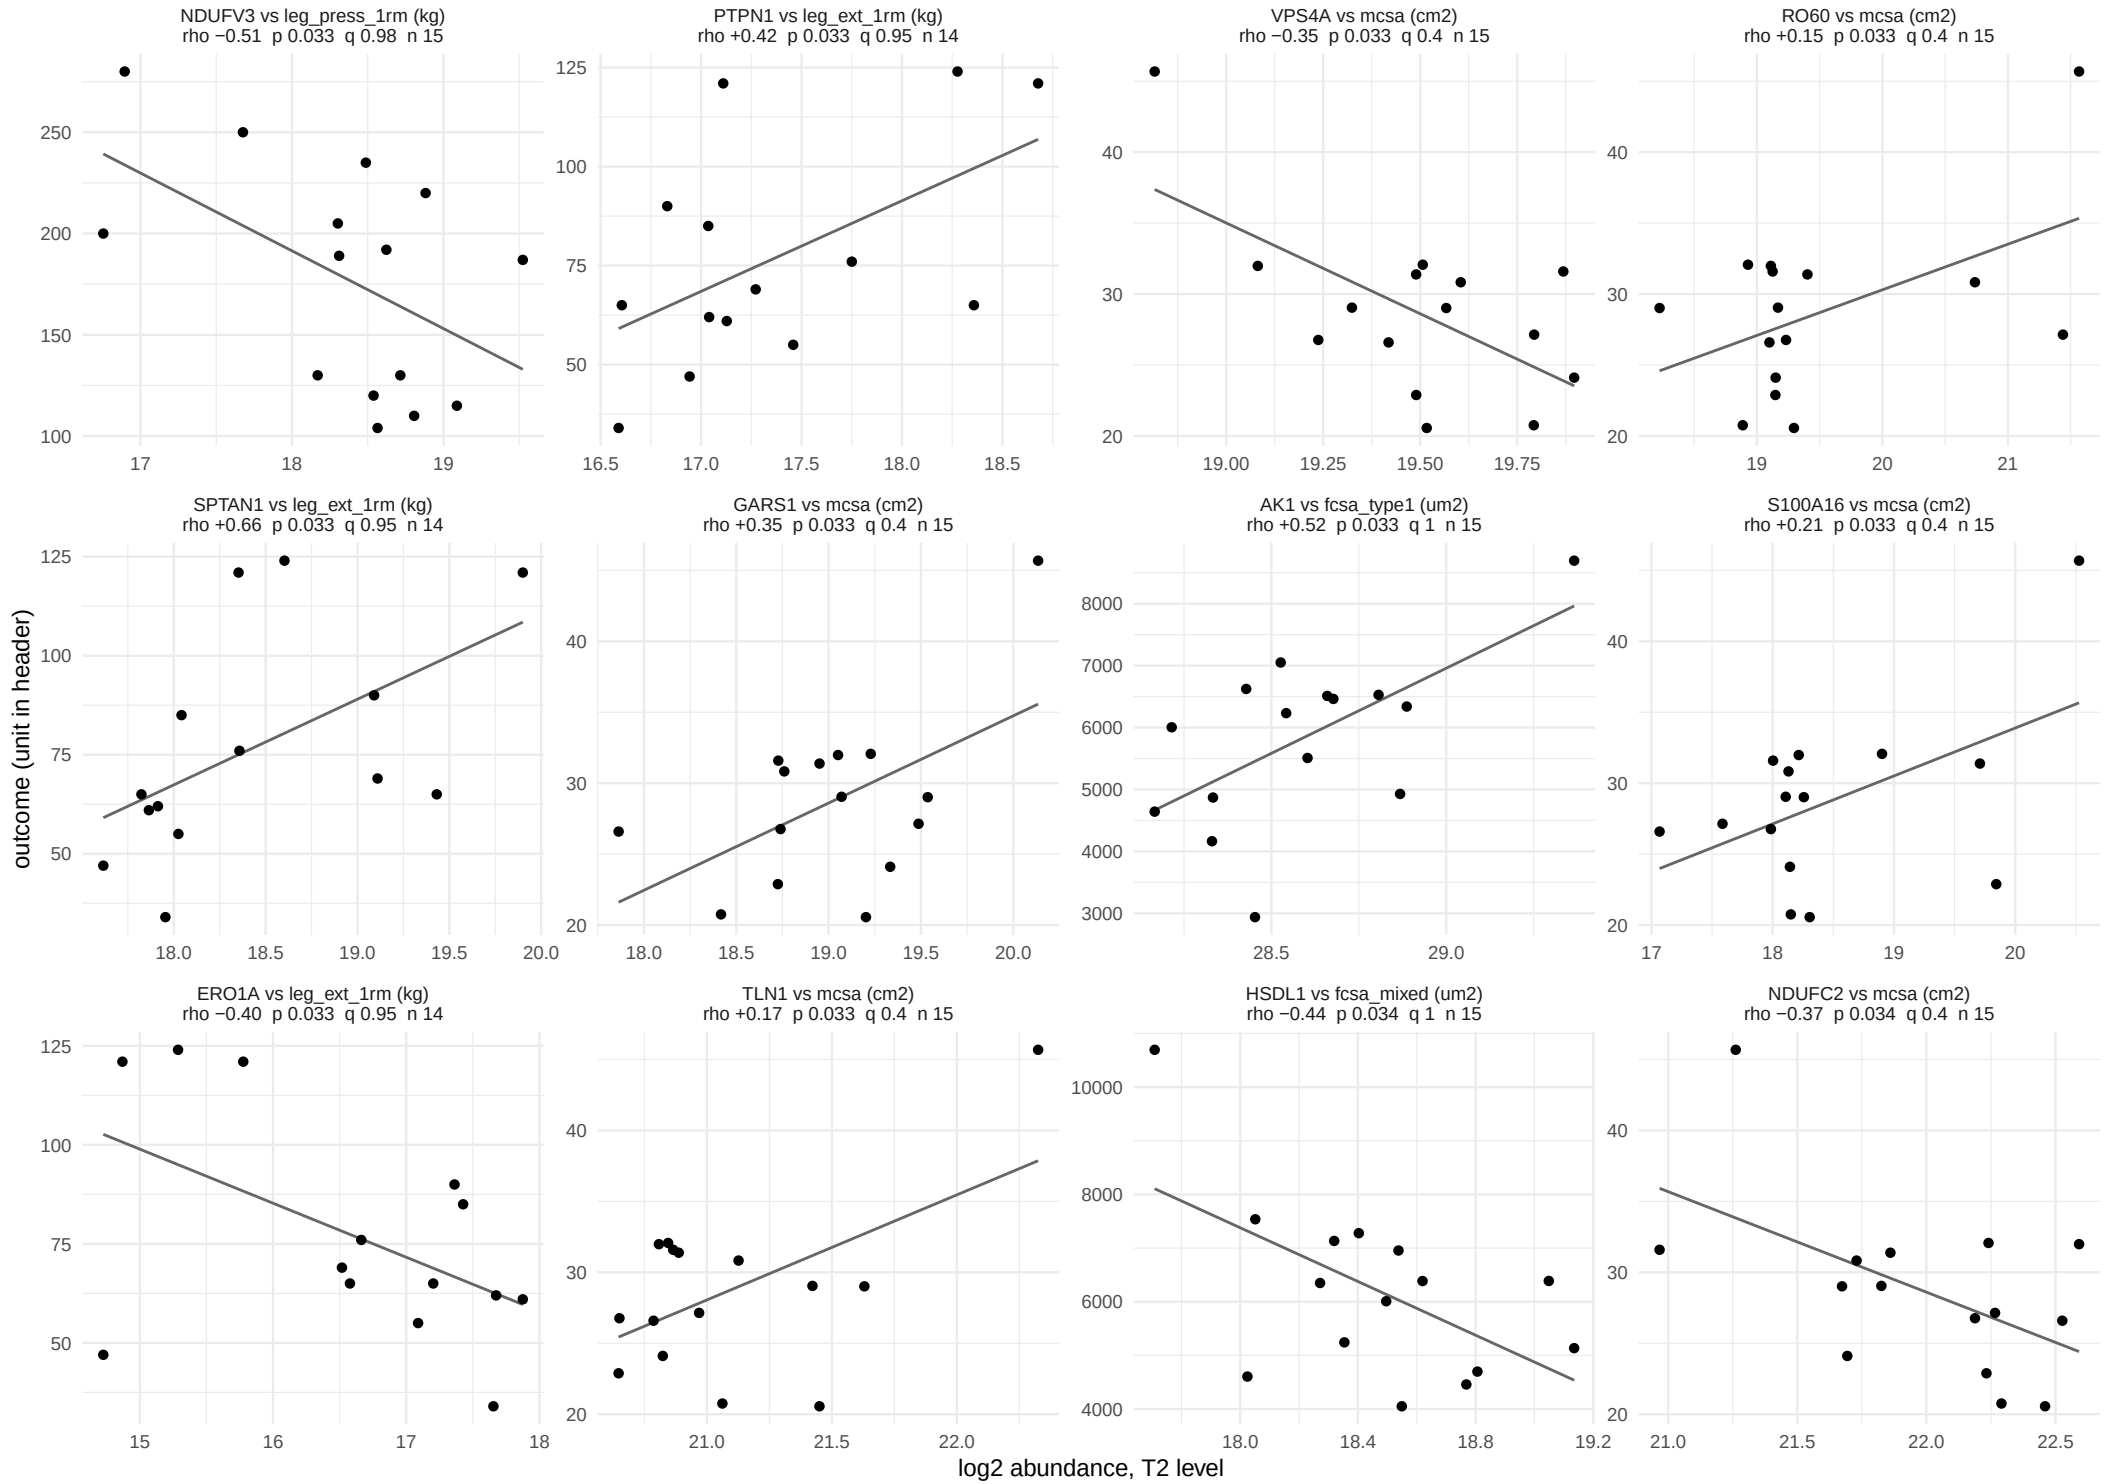

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, post_level window


555 of 11400 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 34 of 47.

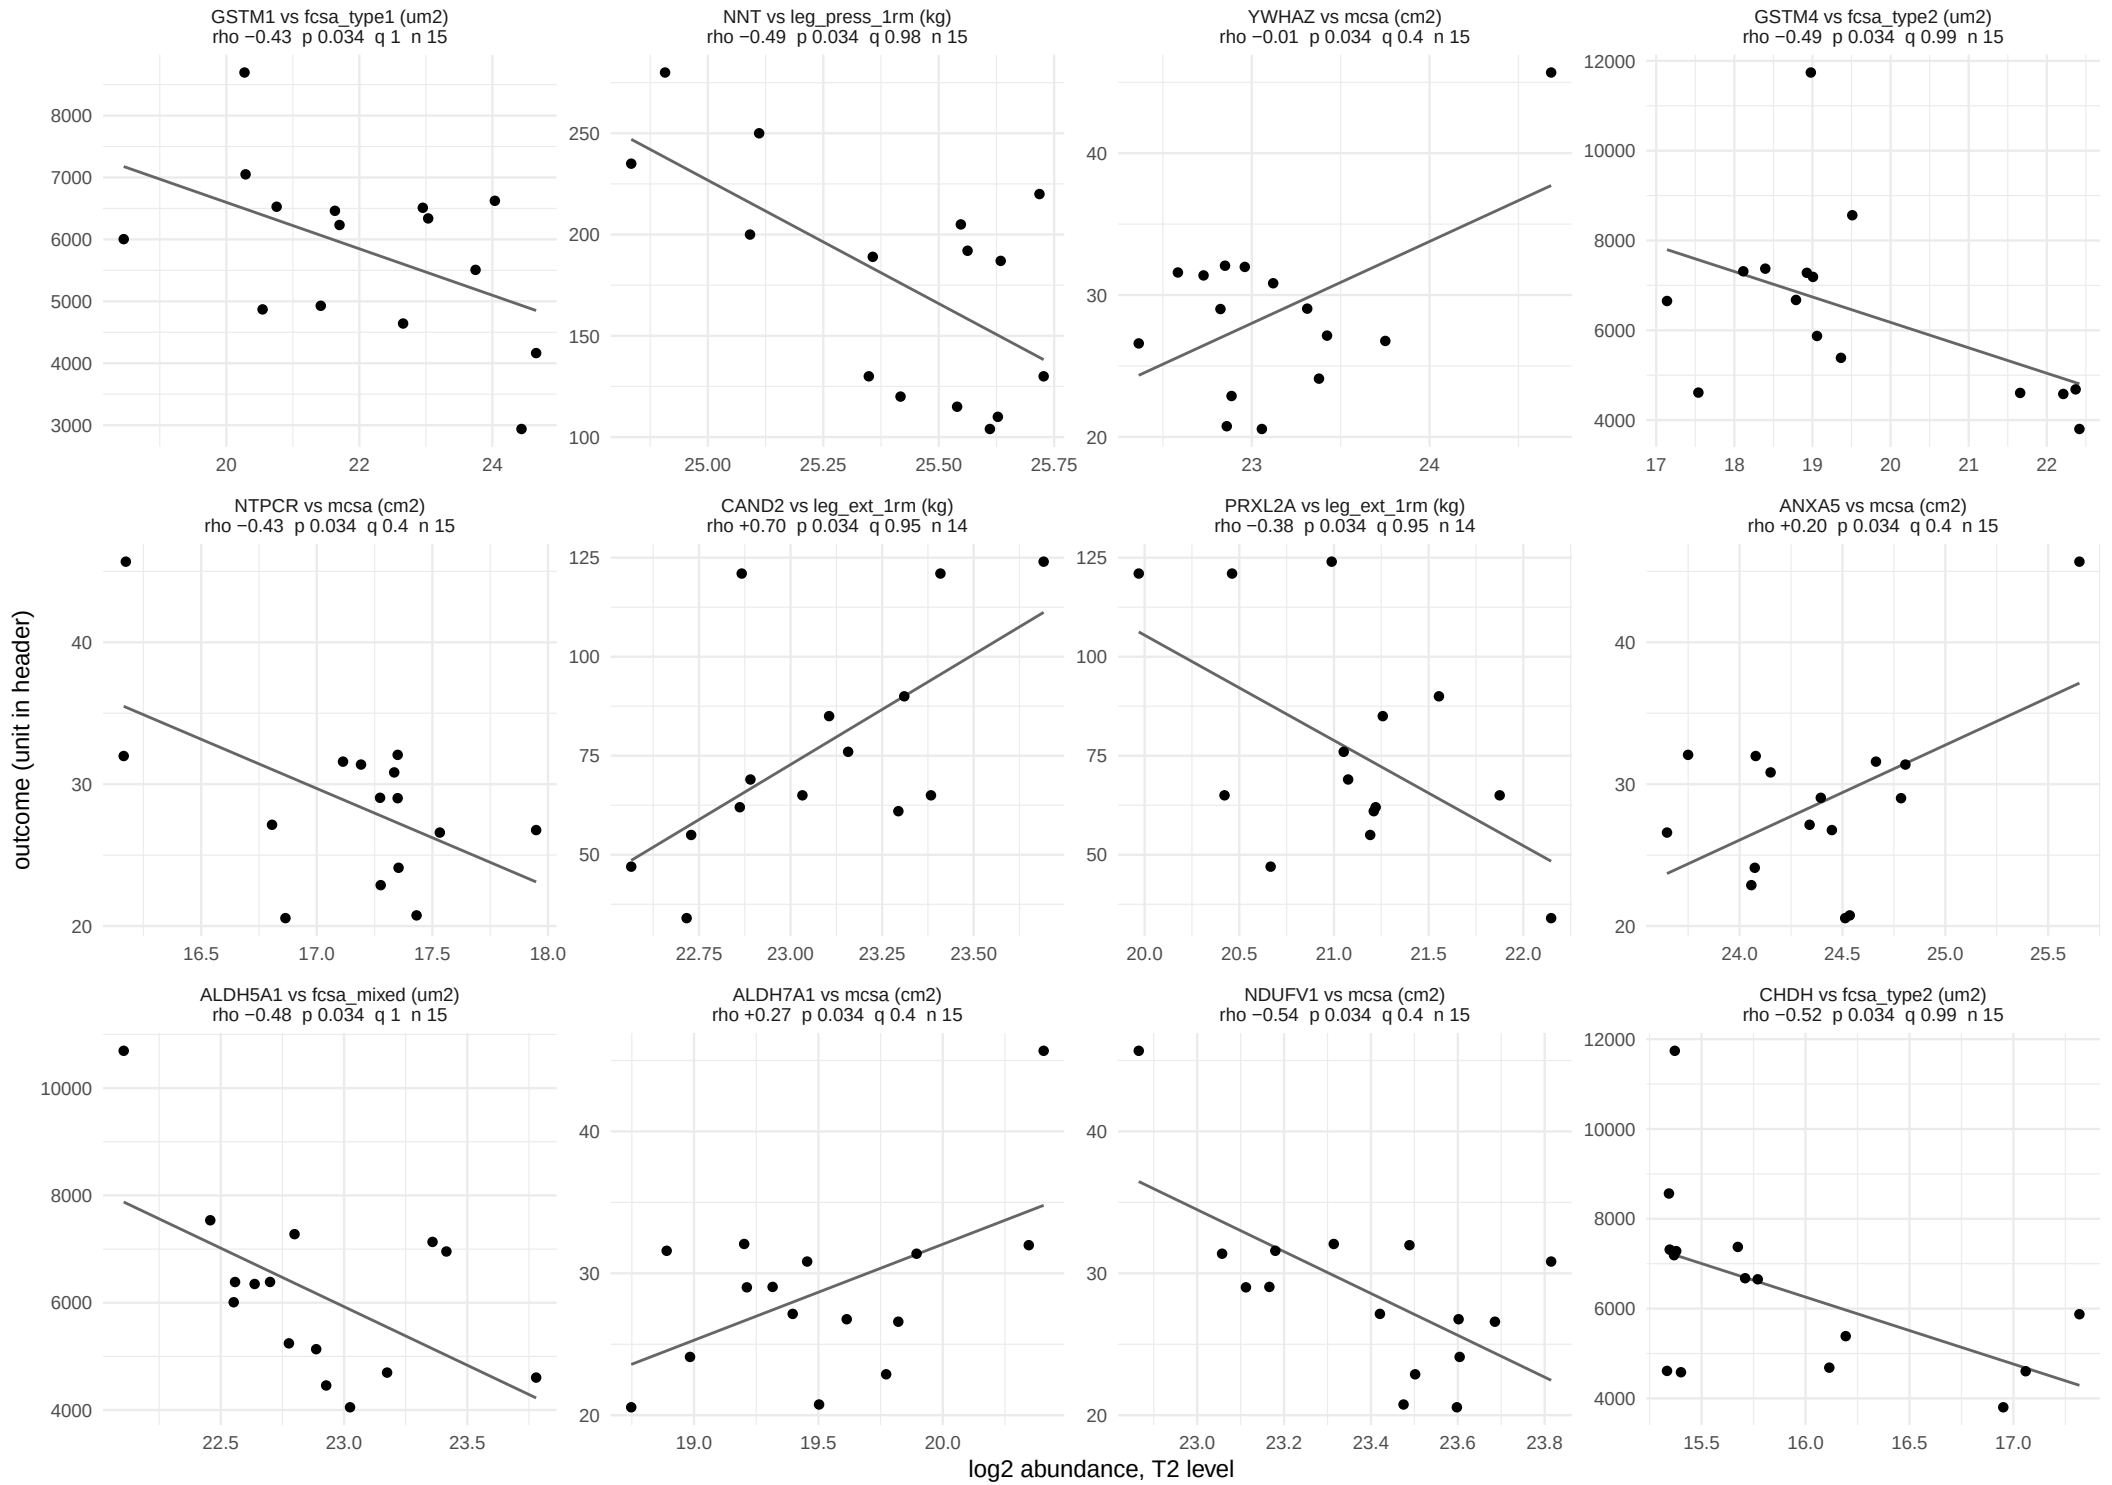

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, post_level window


555 of 11400 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 35 of 47.

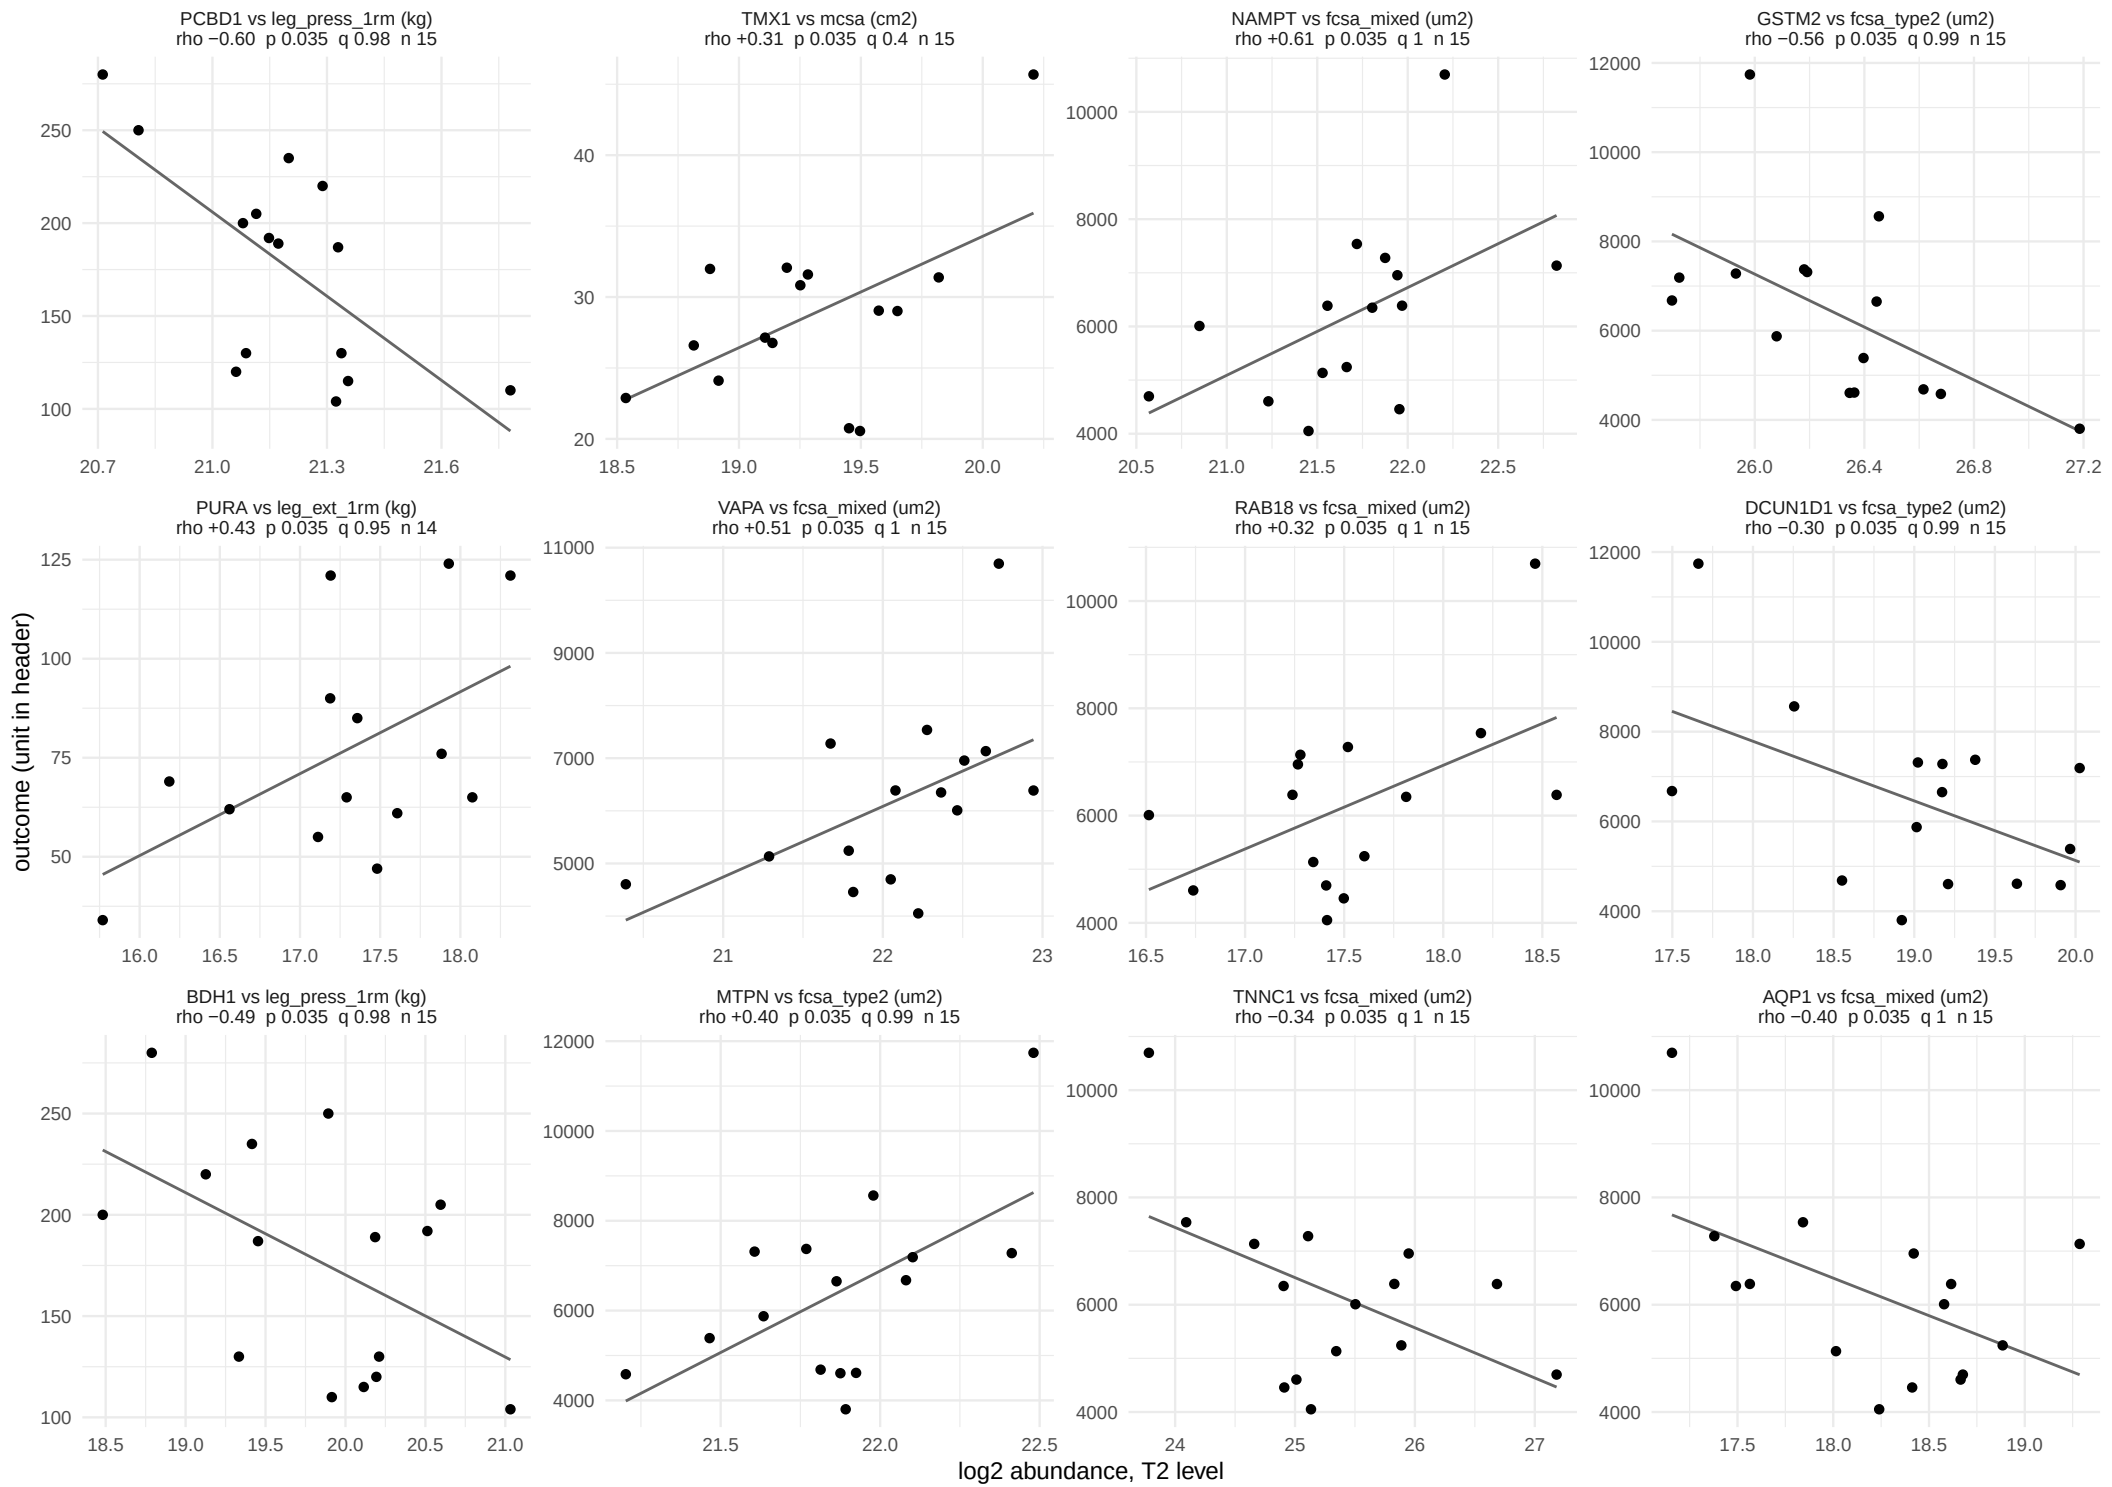

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, post_level window


555 of 11400 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 36 of 47.

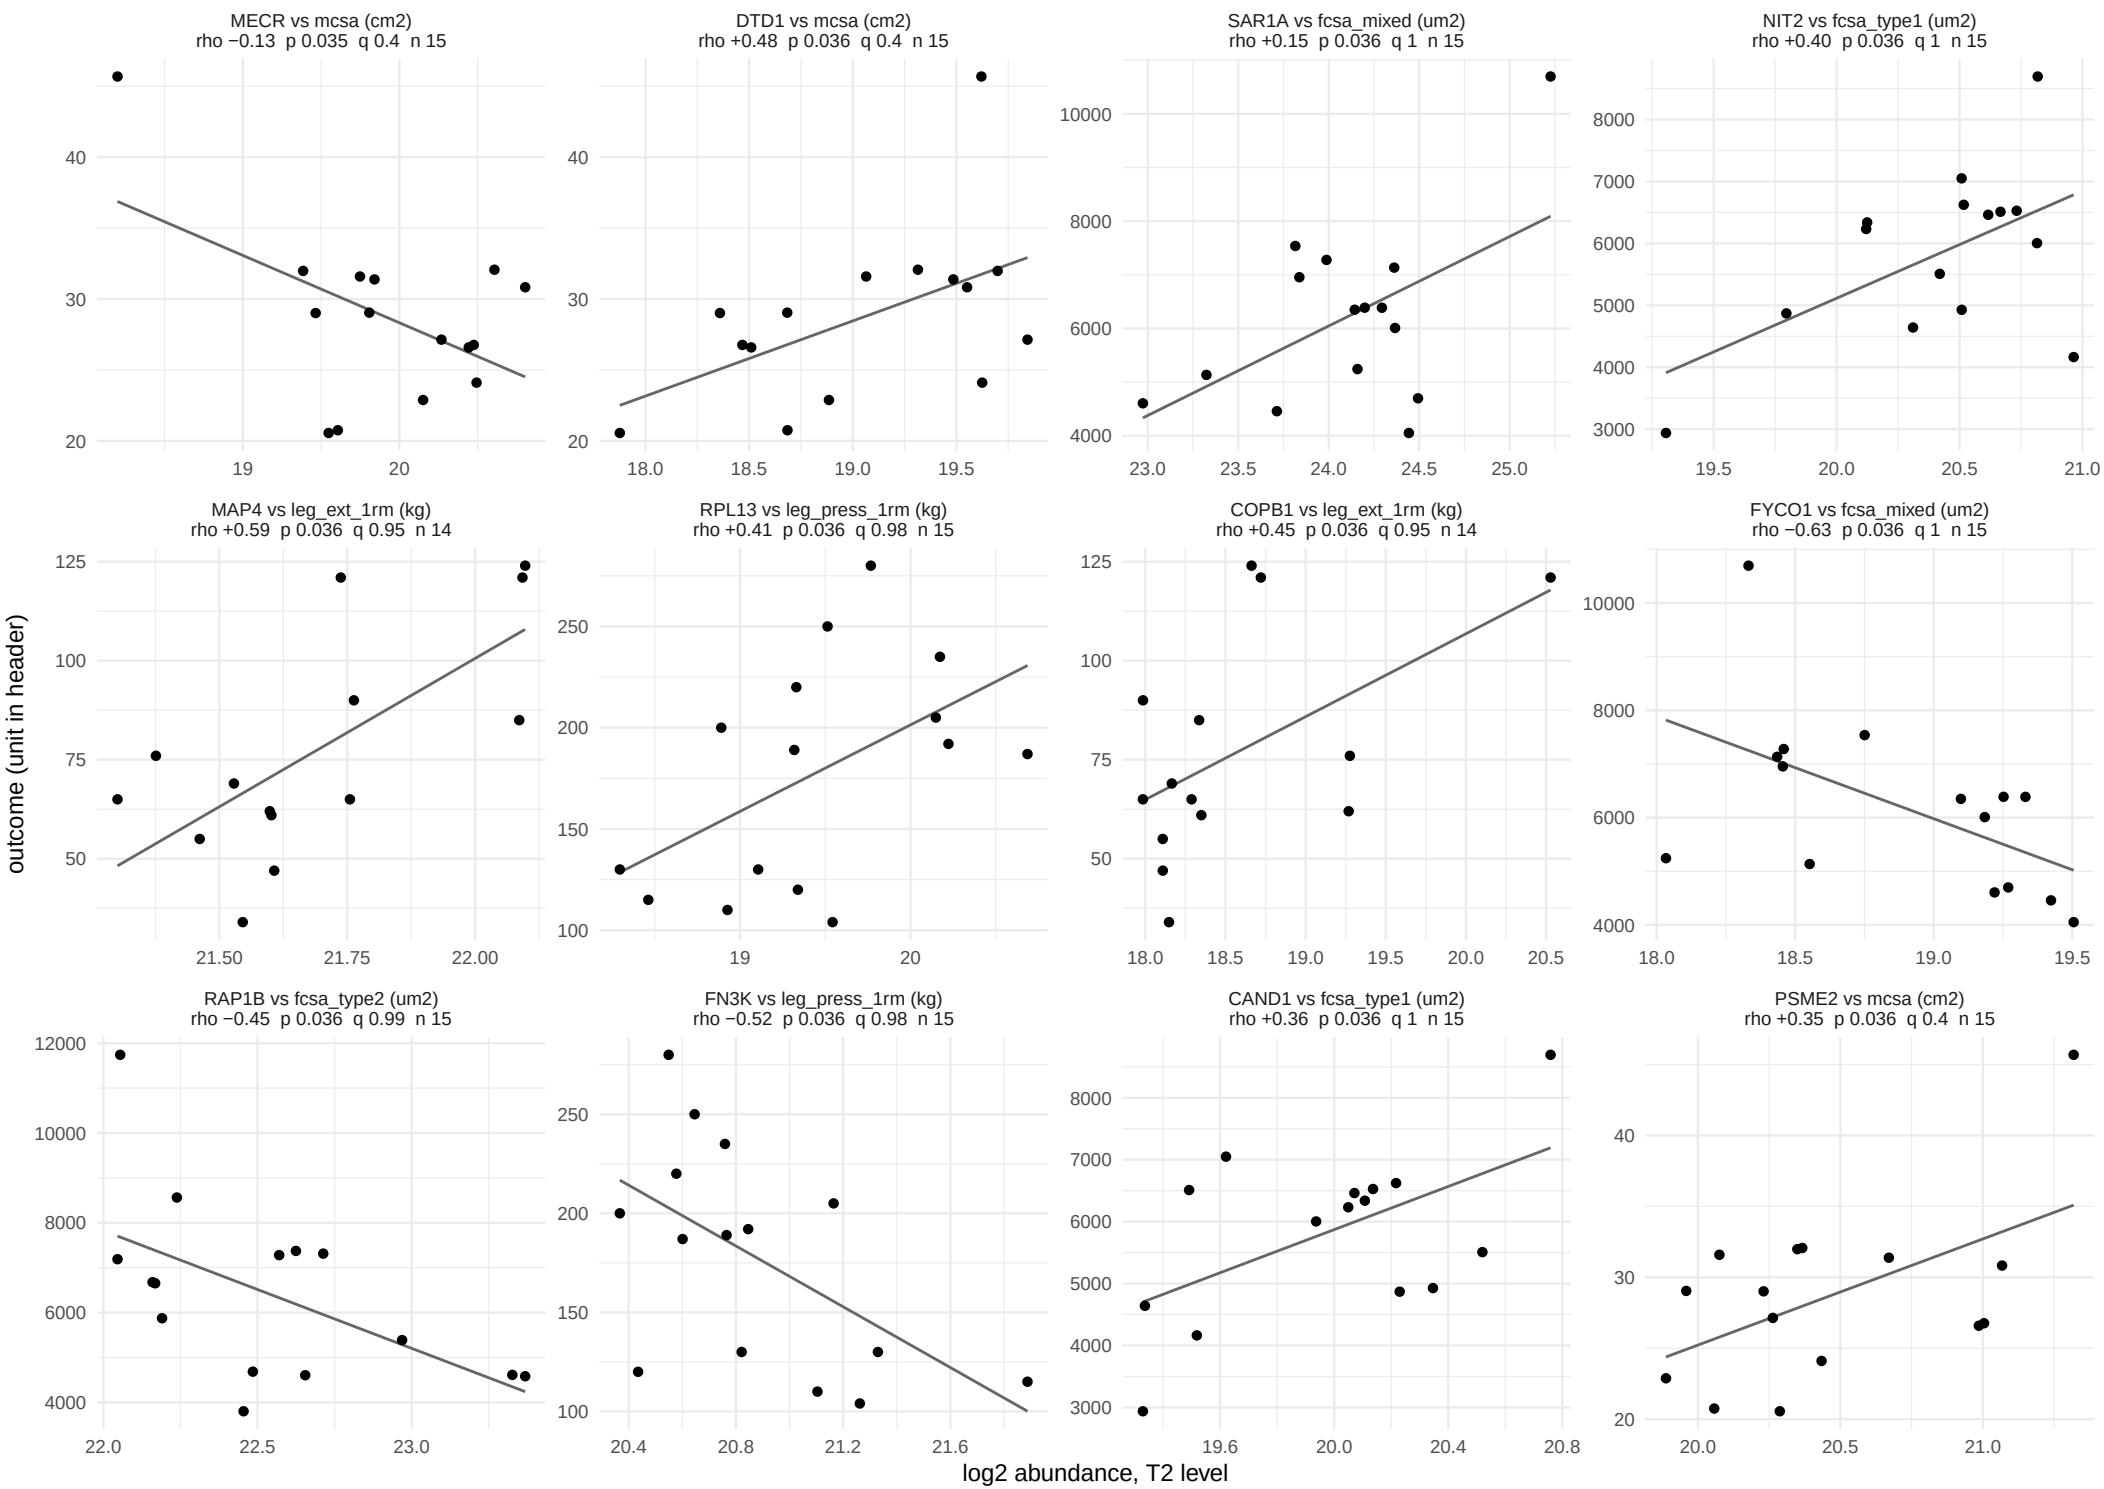

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, post_level window


555 of 11400 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 37 of 47.

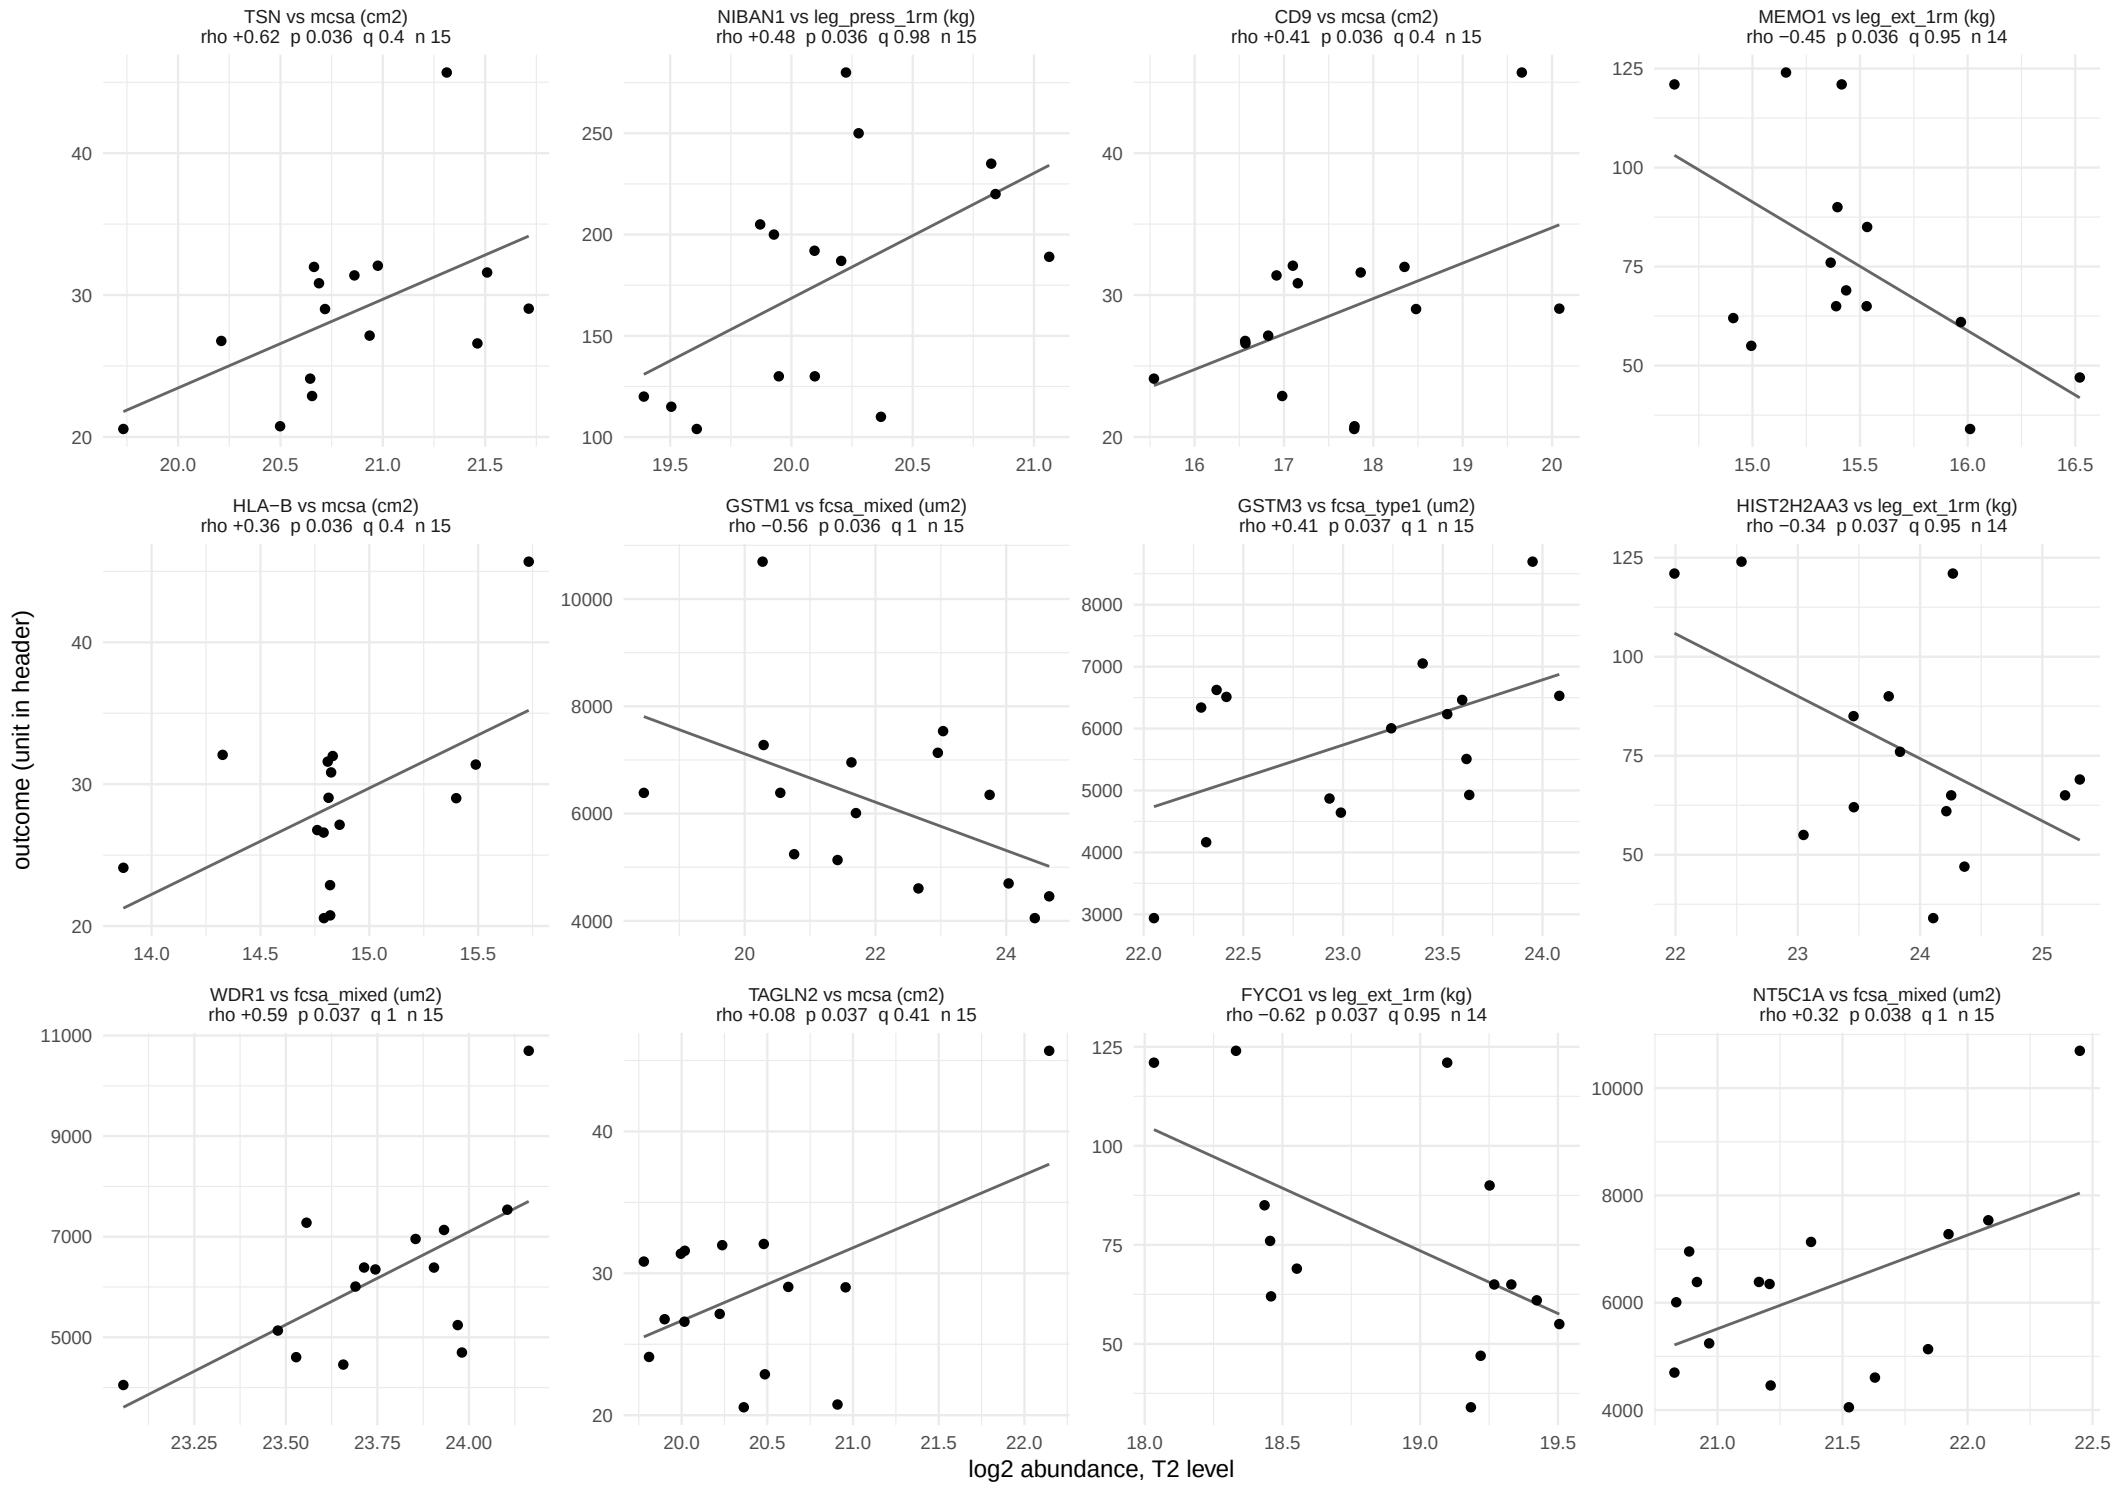

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, post_level window


555 of 11400 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 38 of 47.

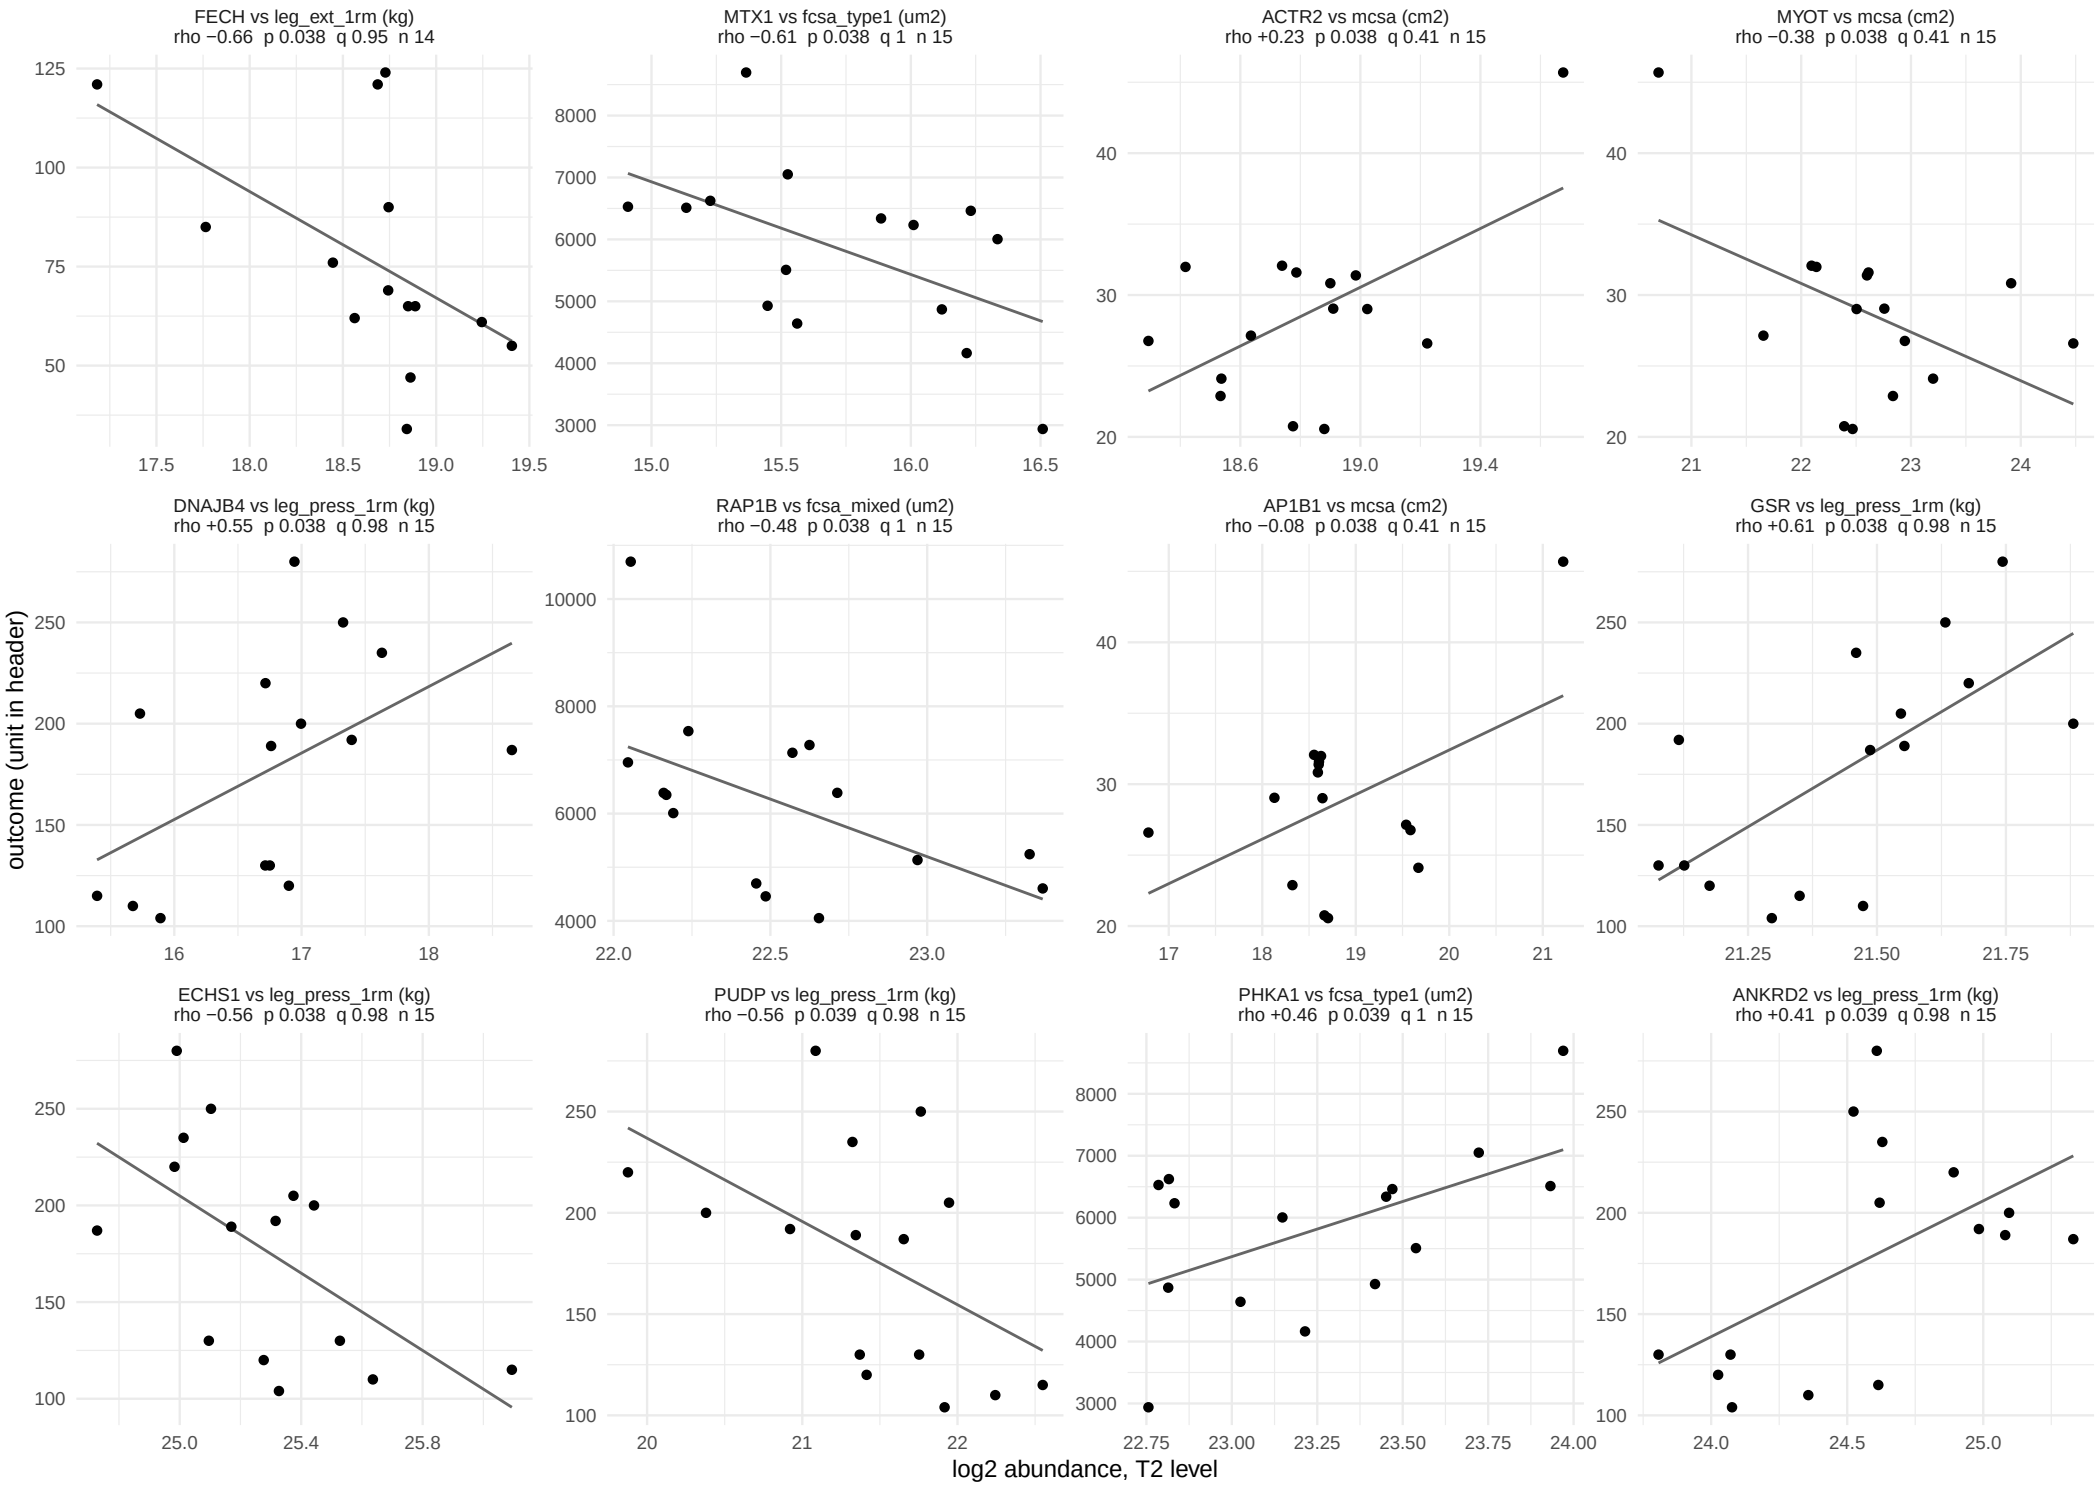

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, post_level window


555 of 11400 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 39 of 47.

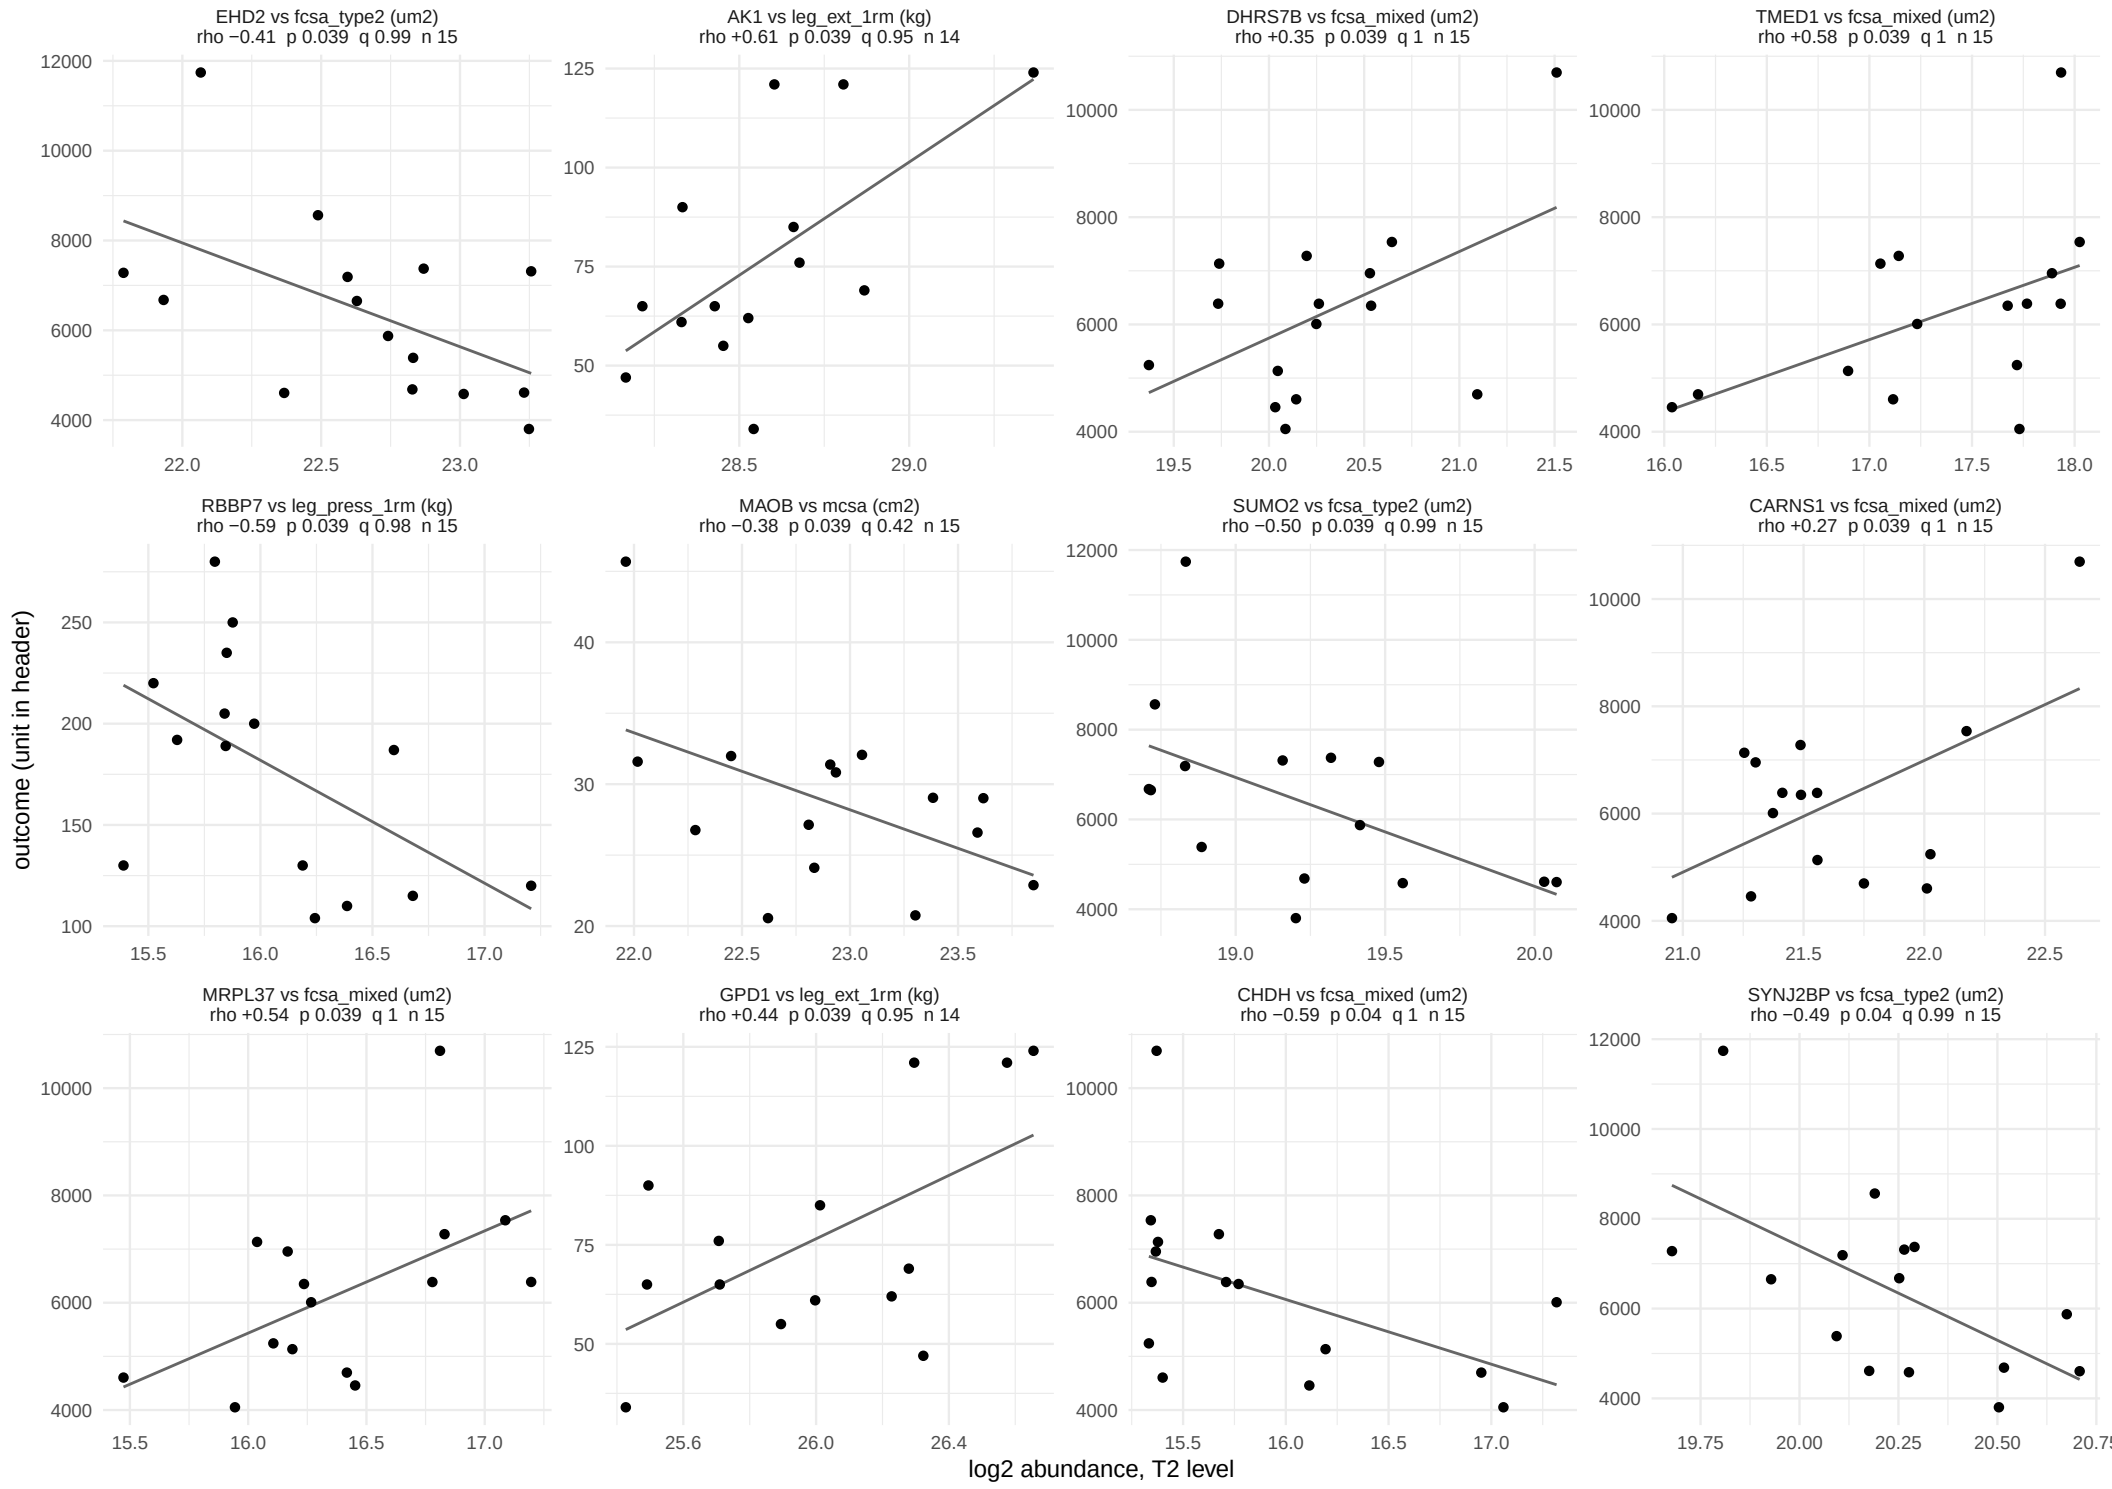

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, post_level window


555 of 11400 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 40 of 47.

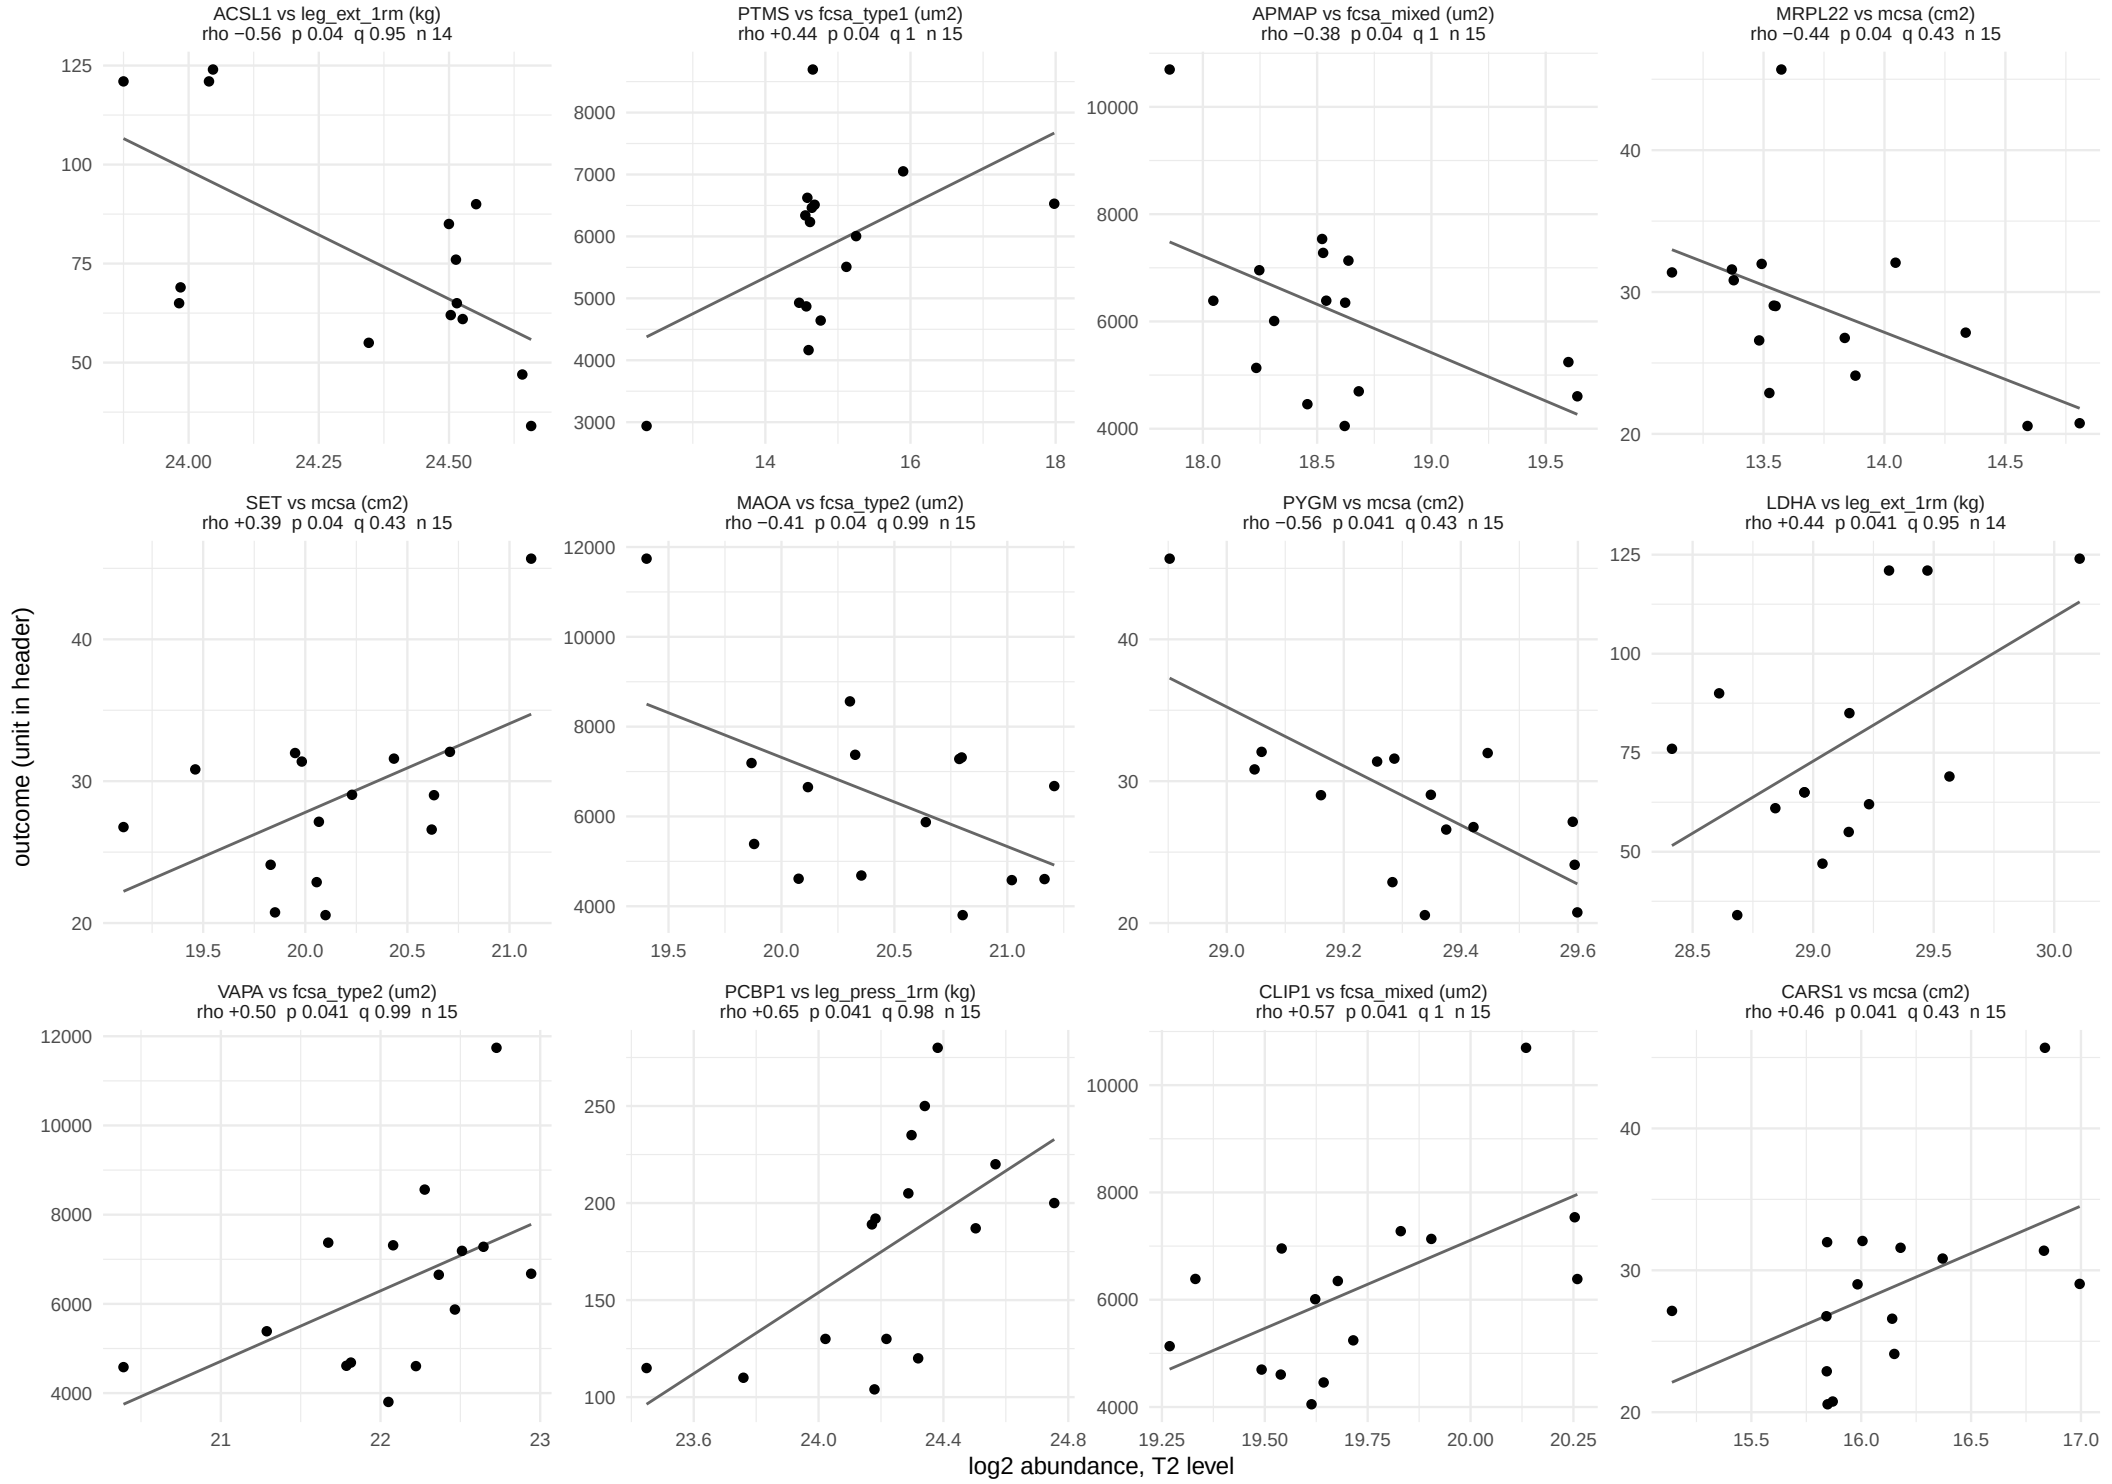

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, post_level window


555 of 11400 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 41 of 47.

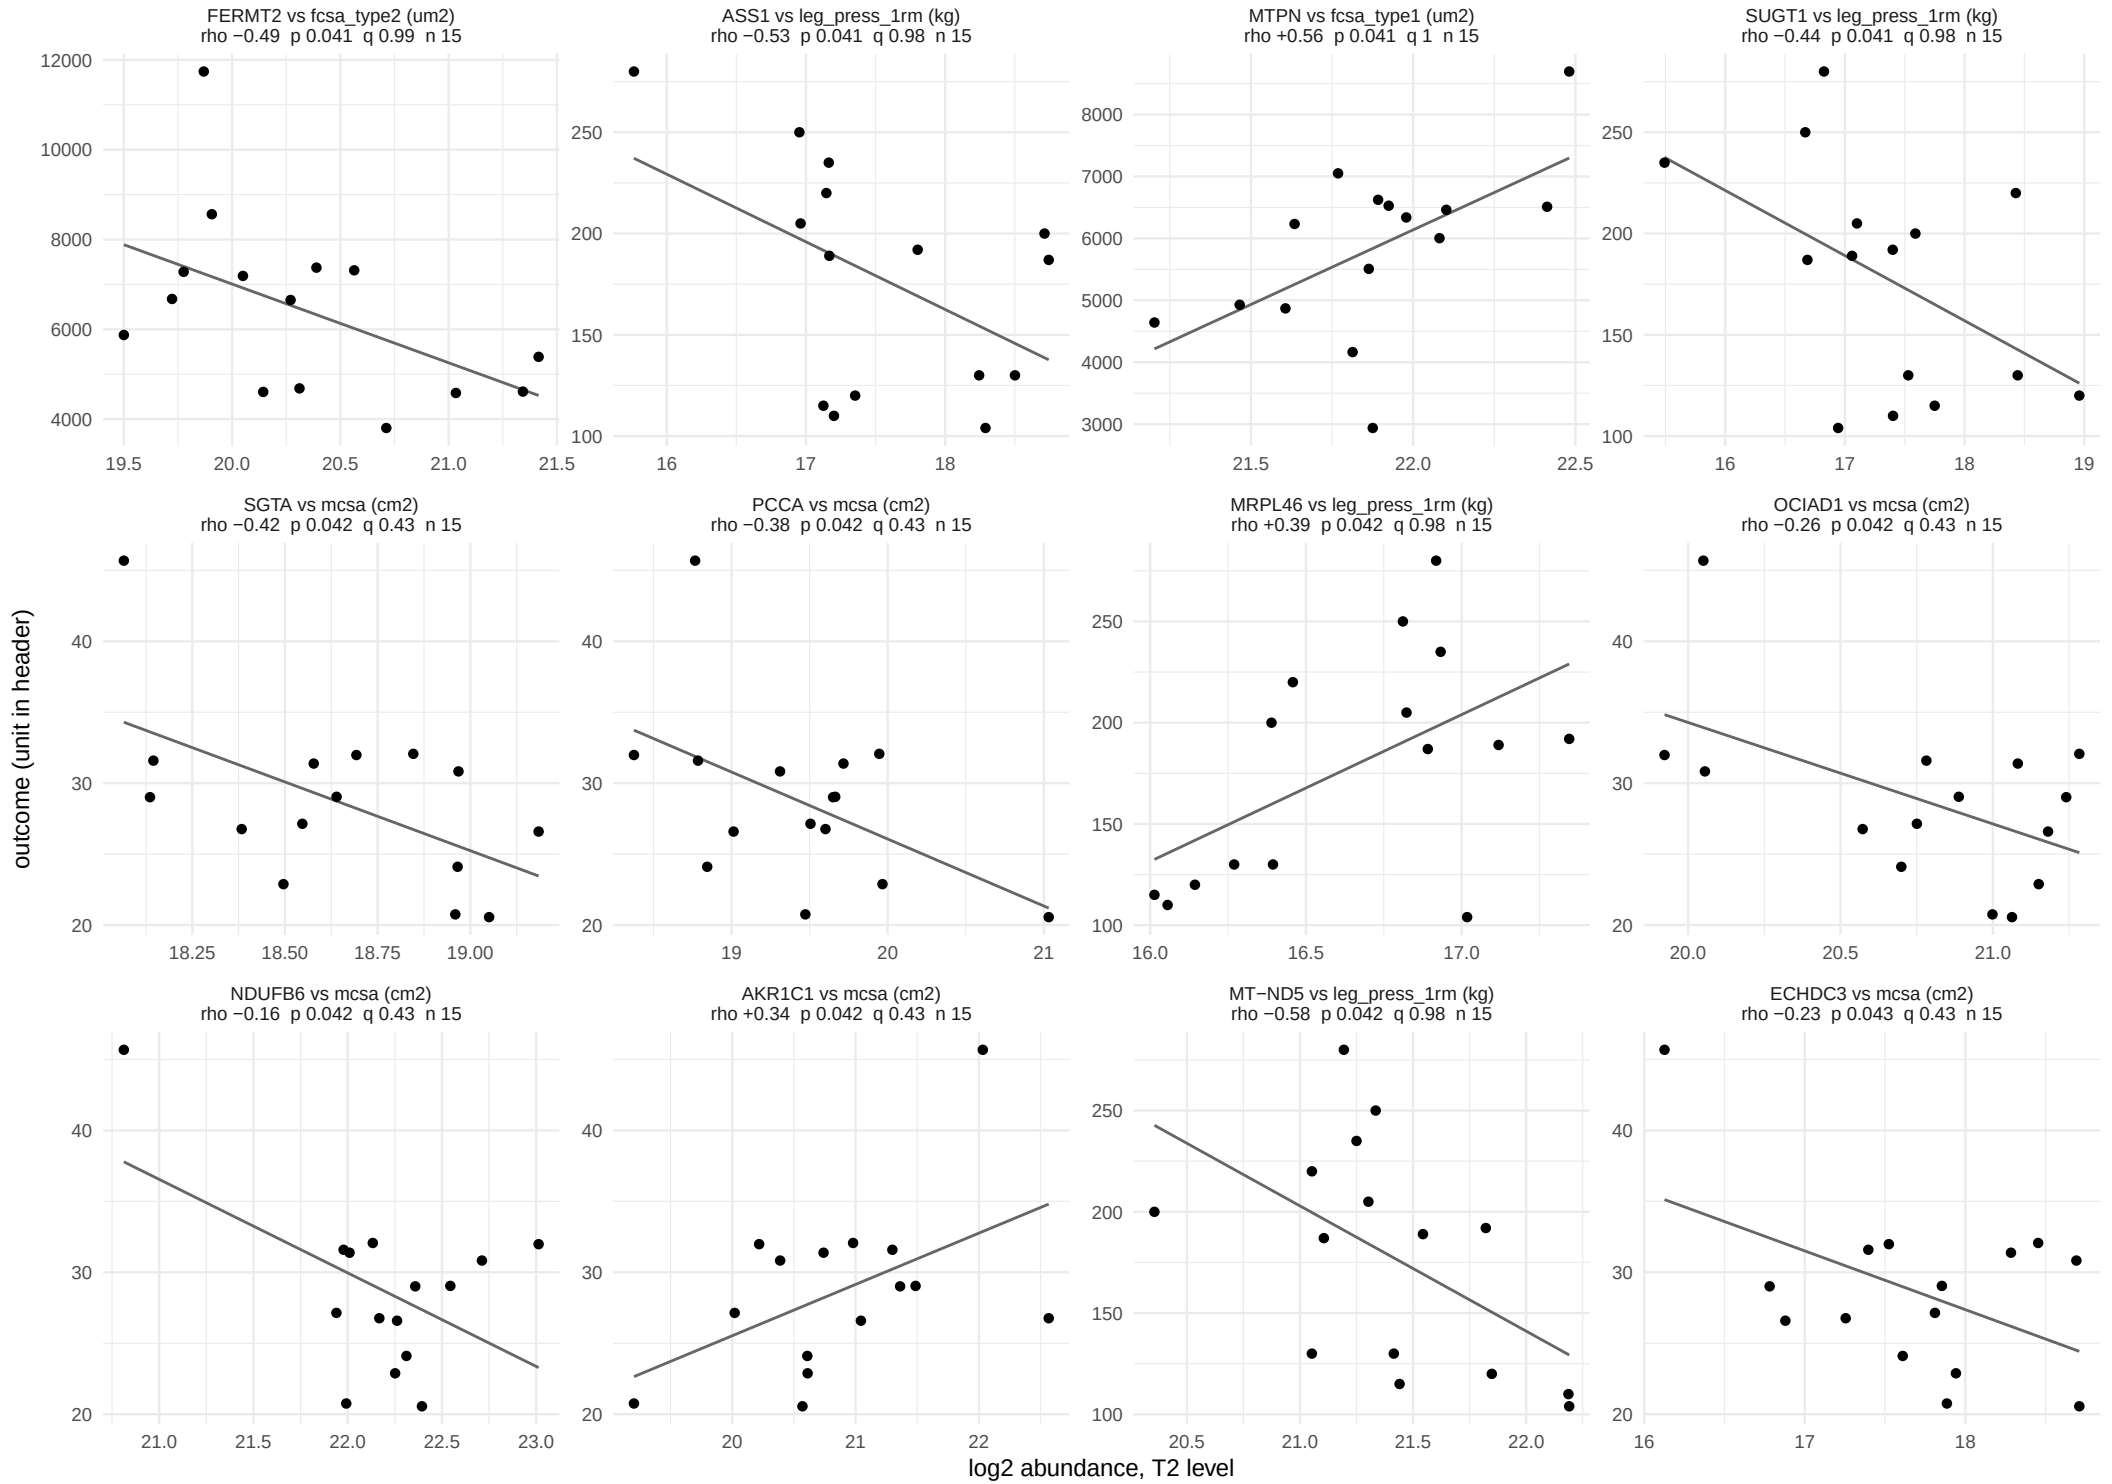

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, post_level window


555 of 11400 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 42 of 47.

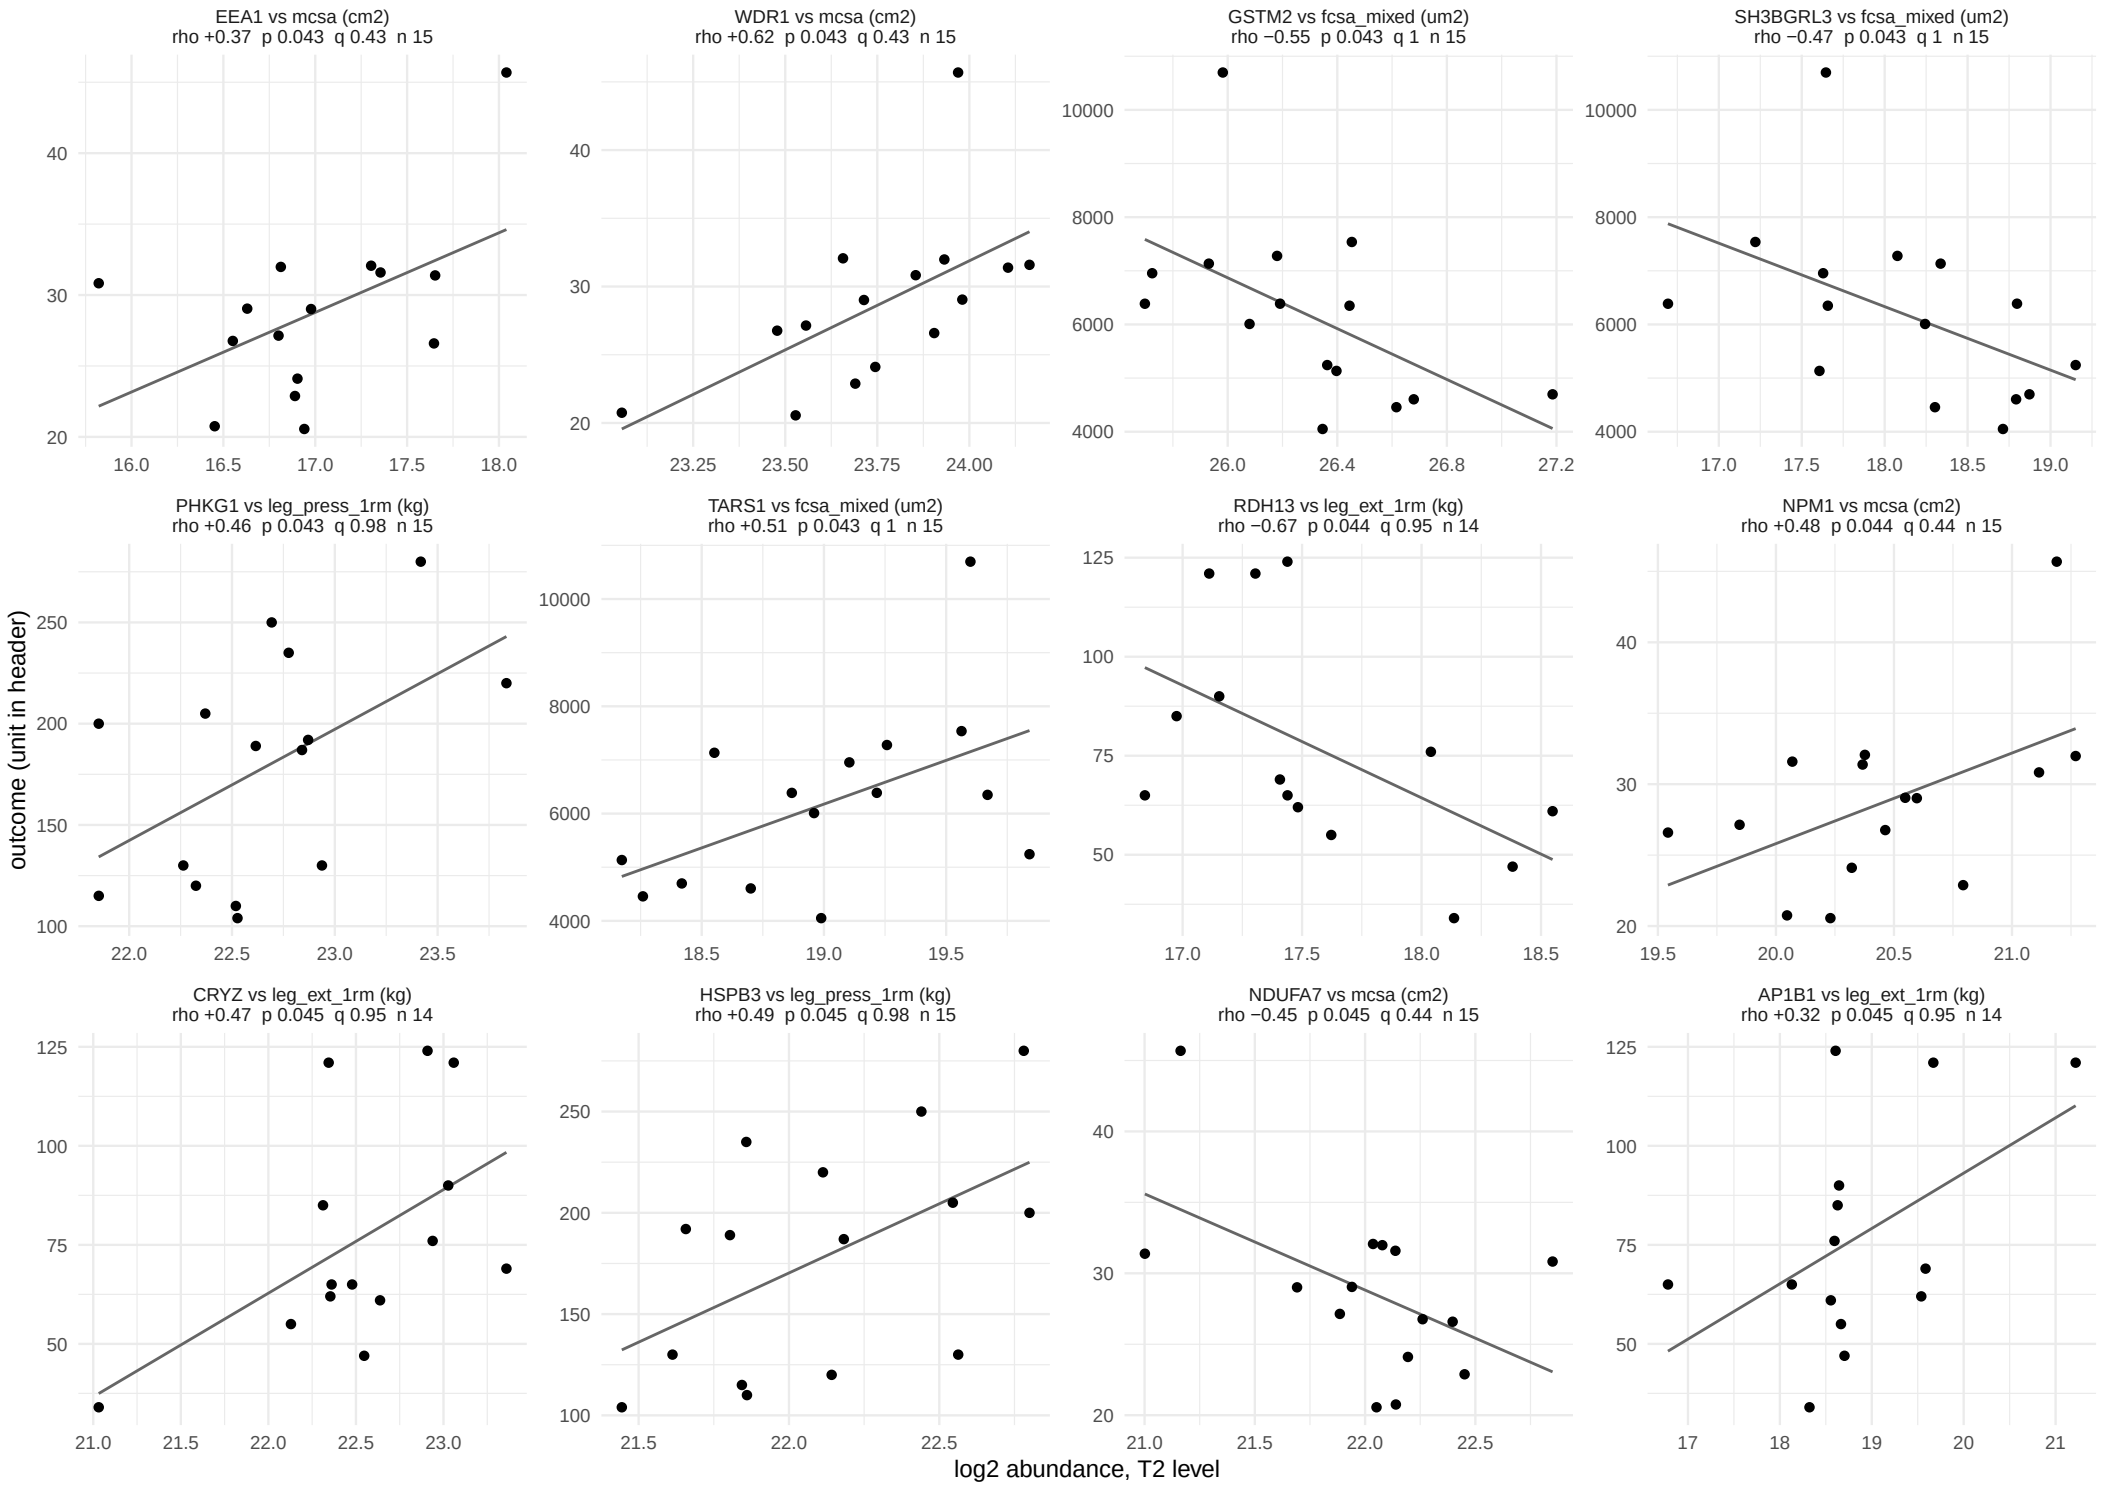

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, post_level window


555 of 11400 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 43 of 47.

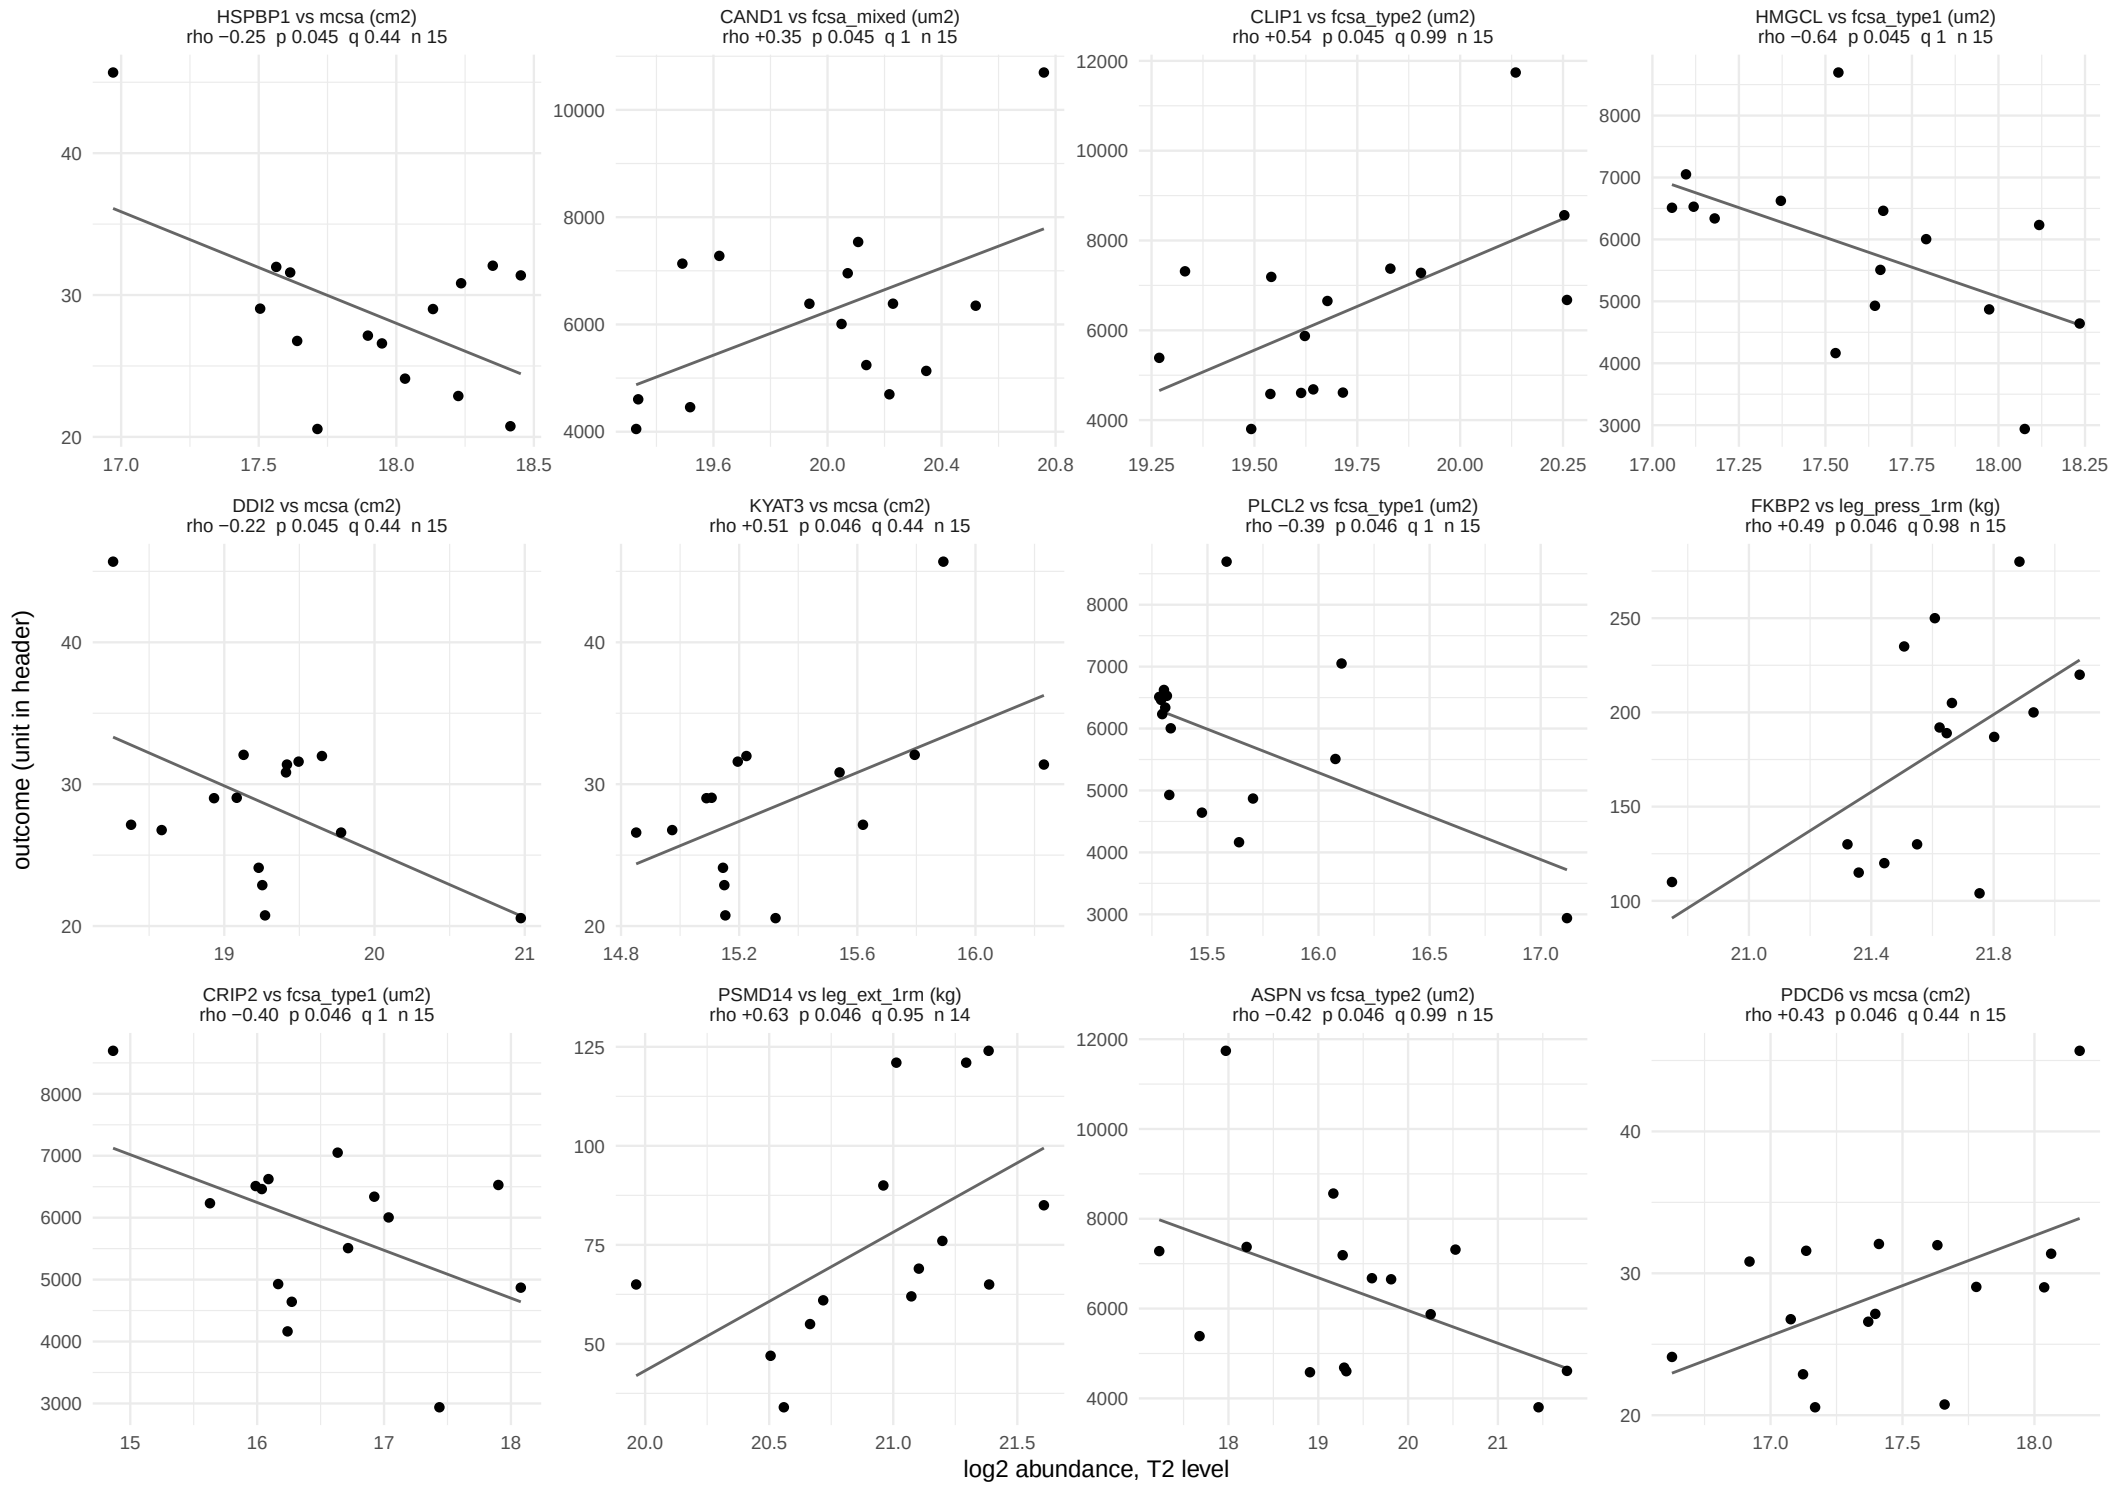

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, post_level window


555 of 11400 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 44 of 47.

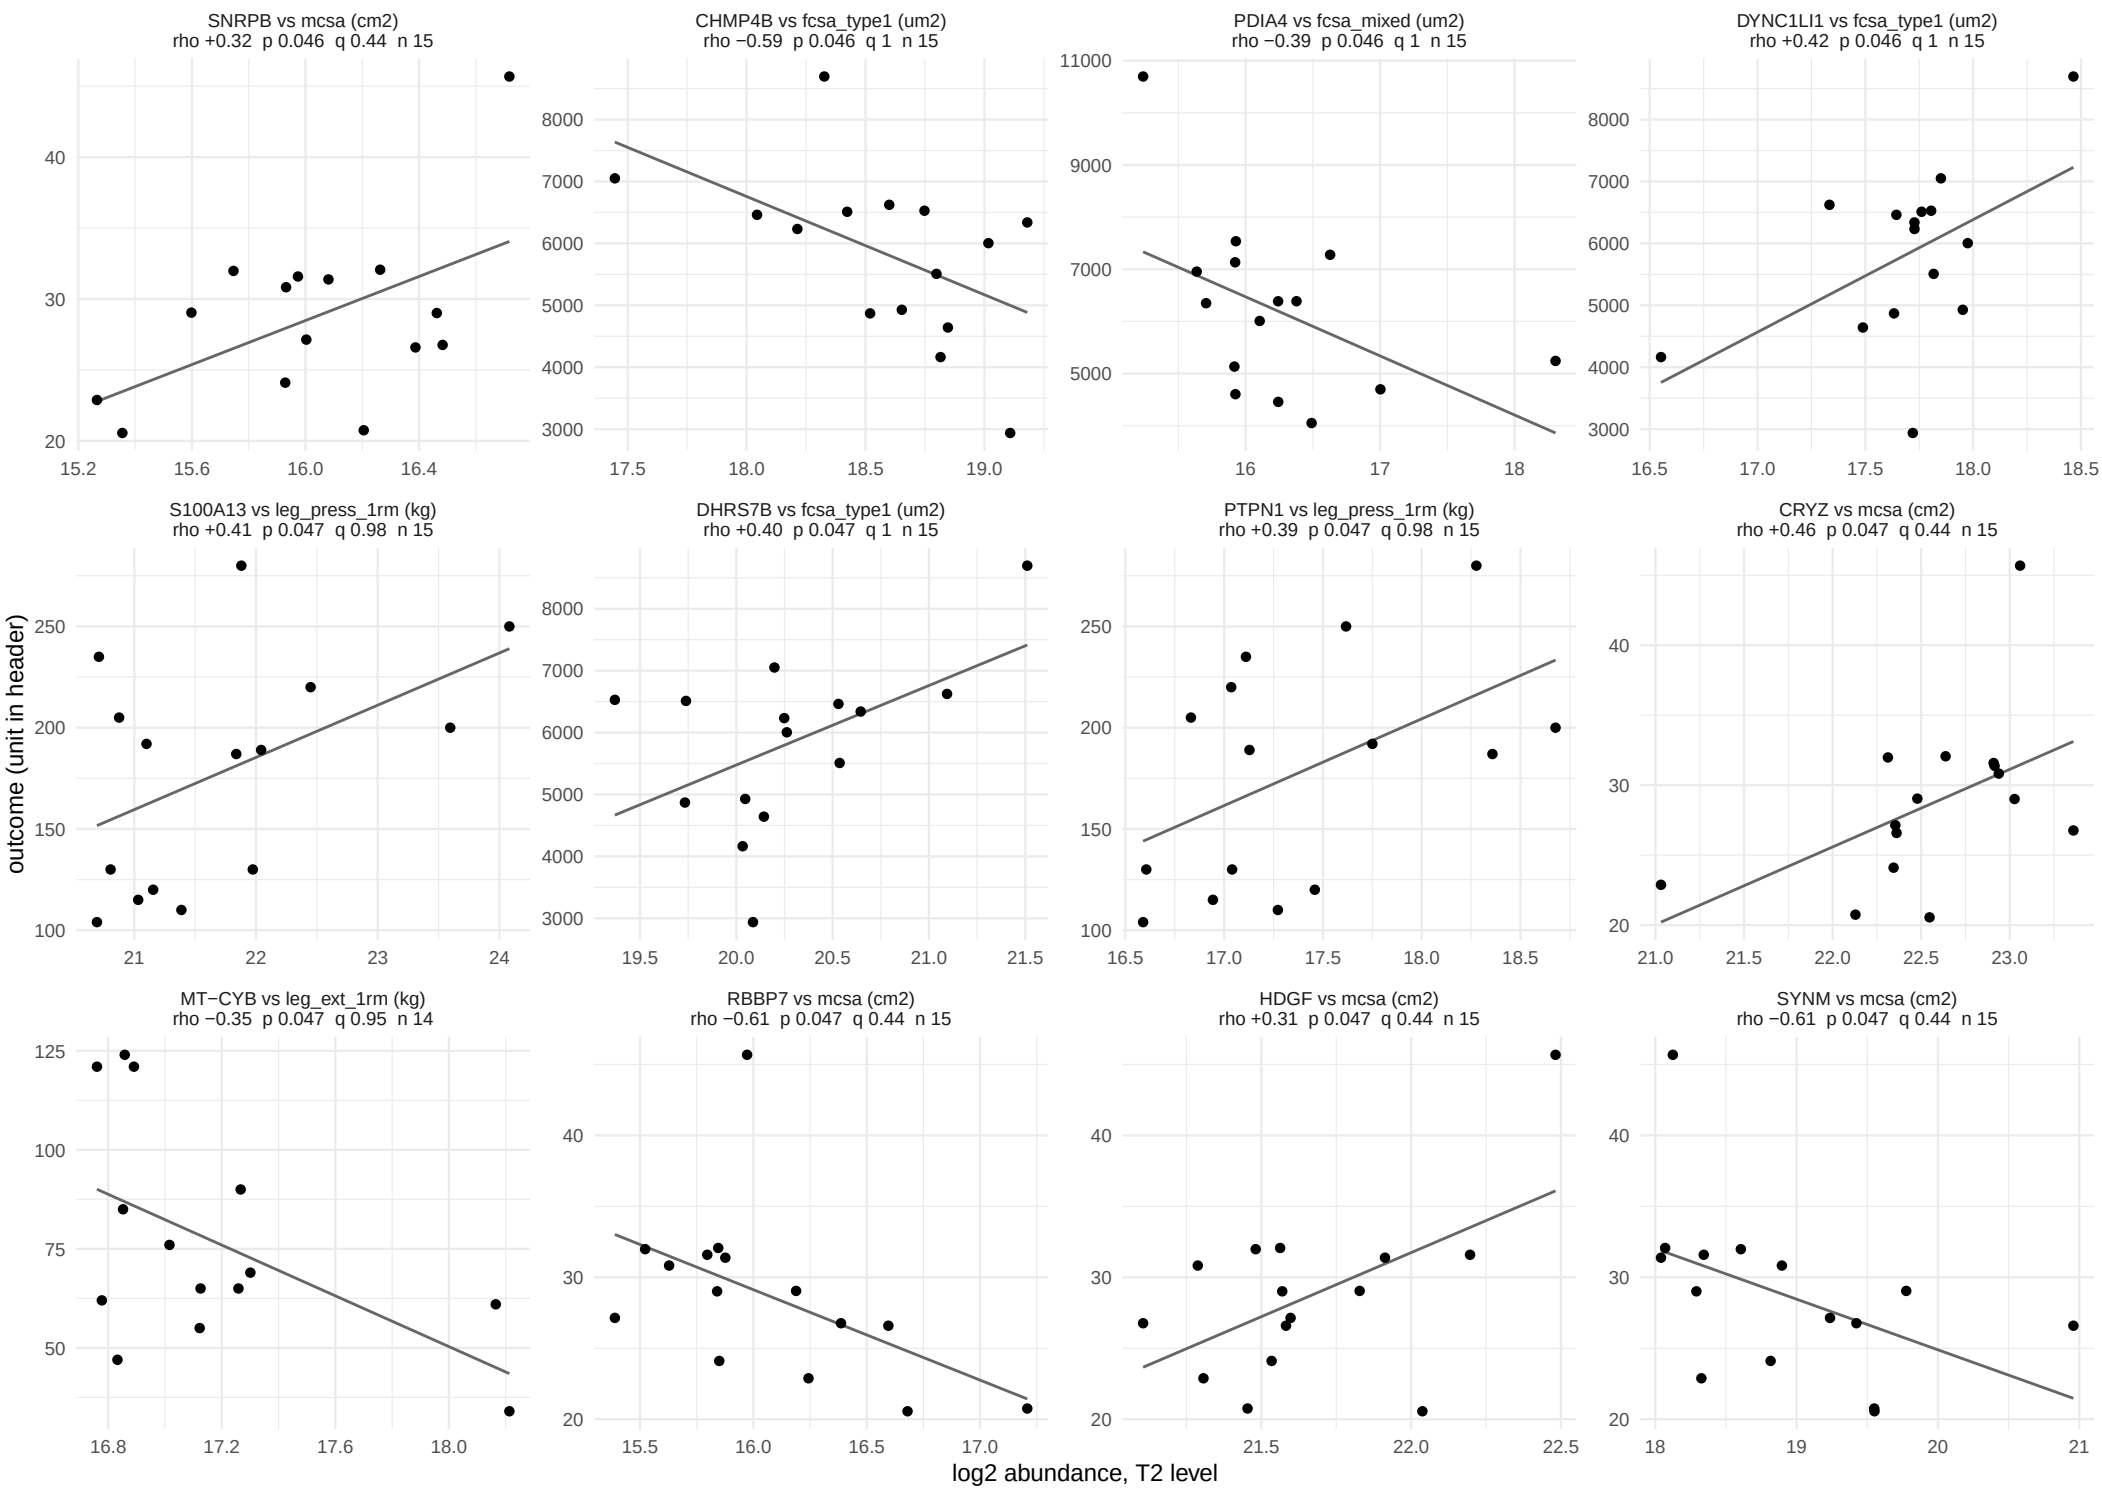

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, post_level window


555 of 11400 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 45 of 47.

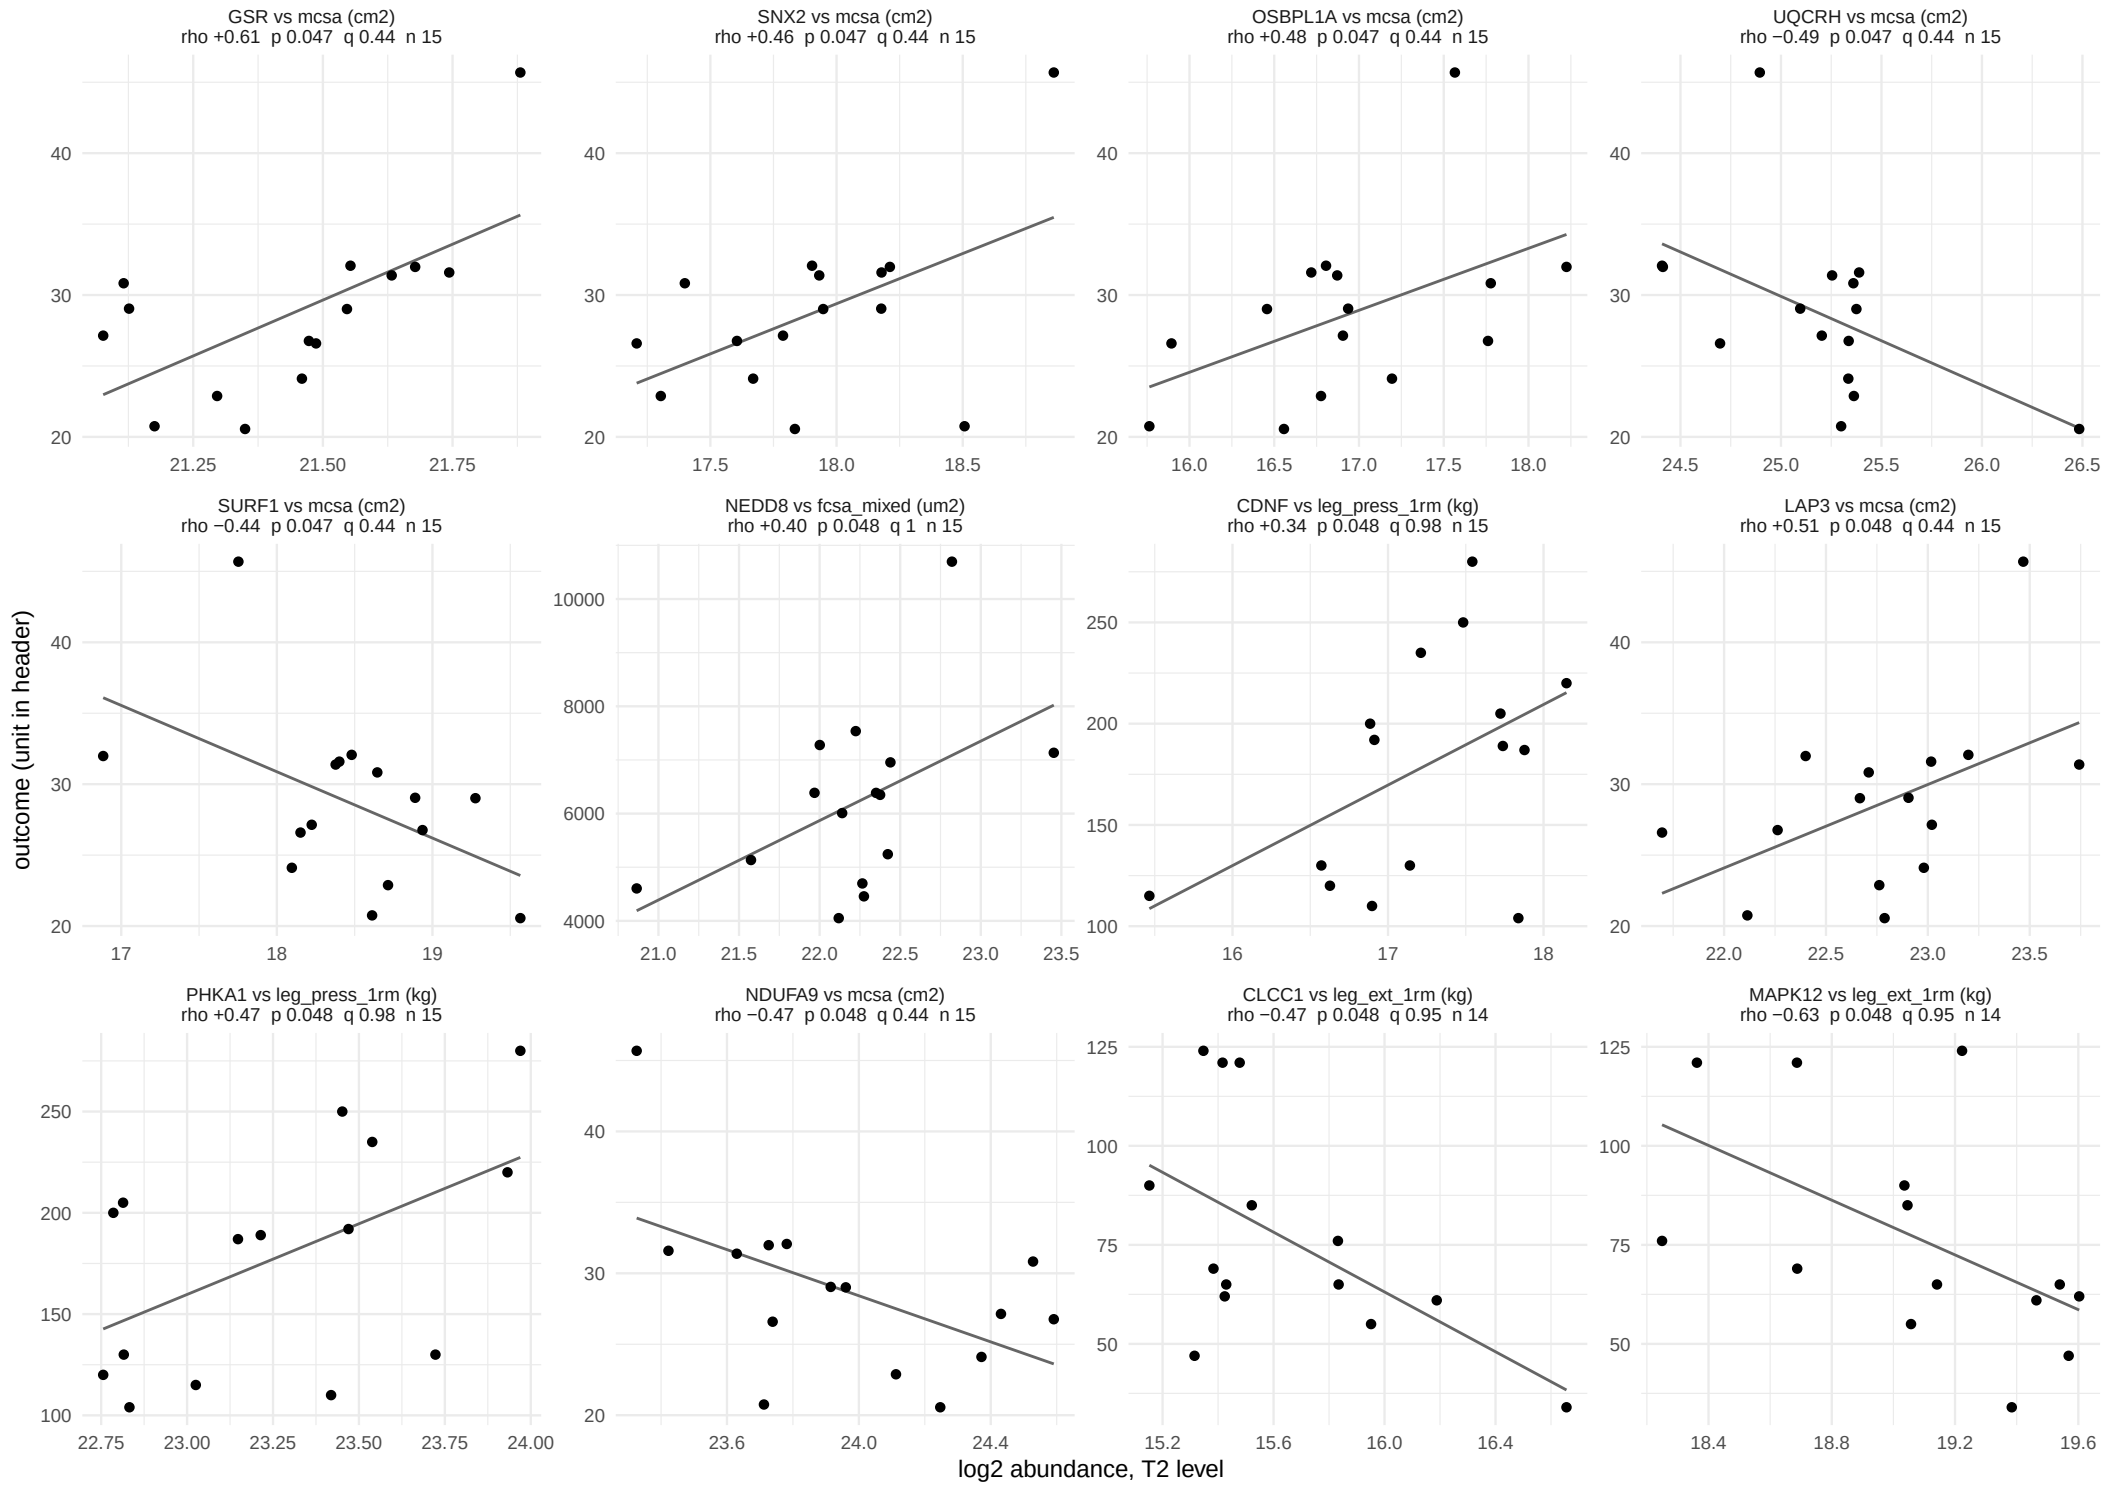

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, post_level window


555 of 11400 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 46 of 47.

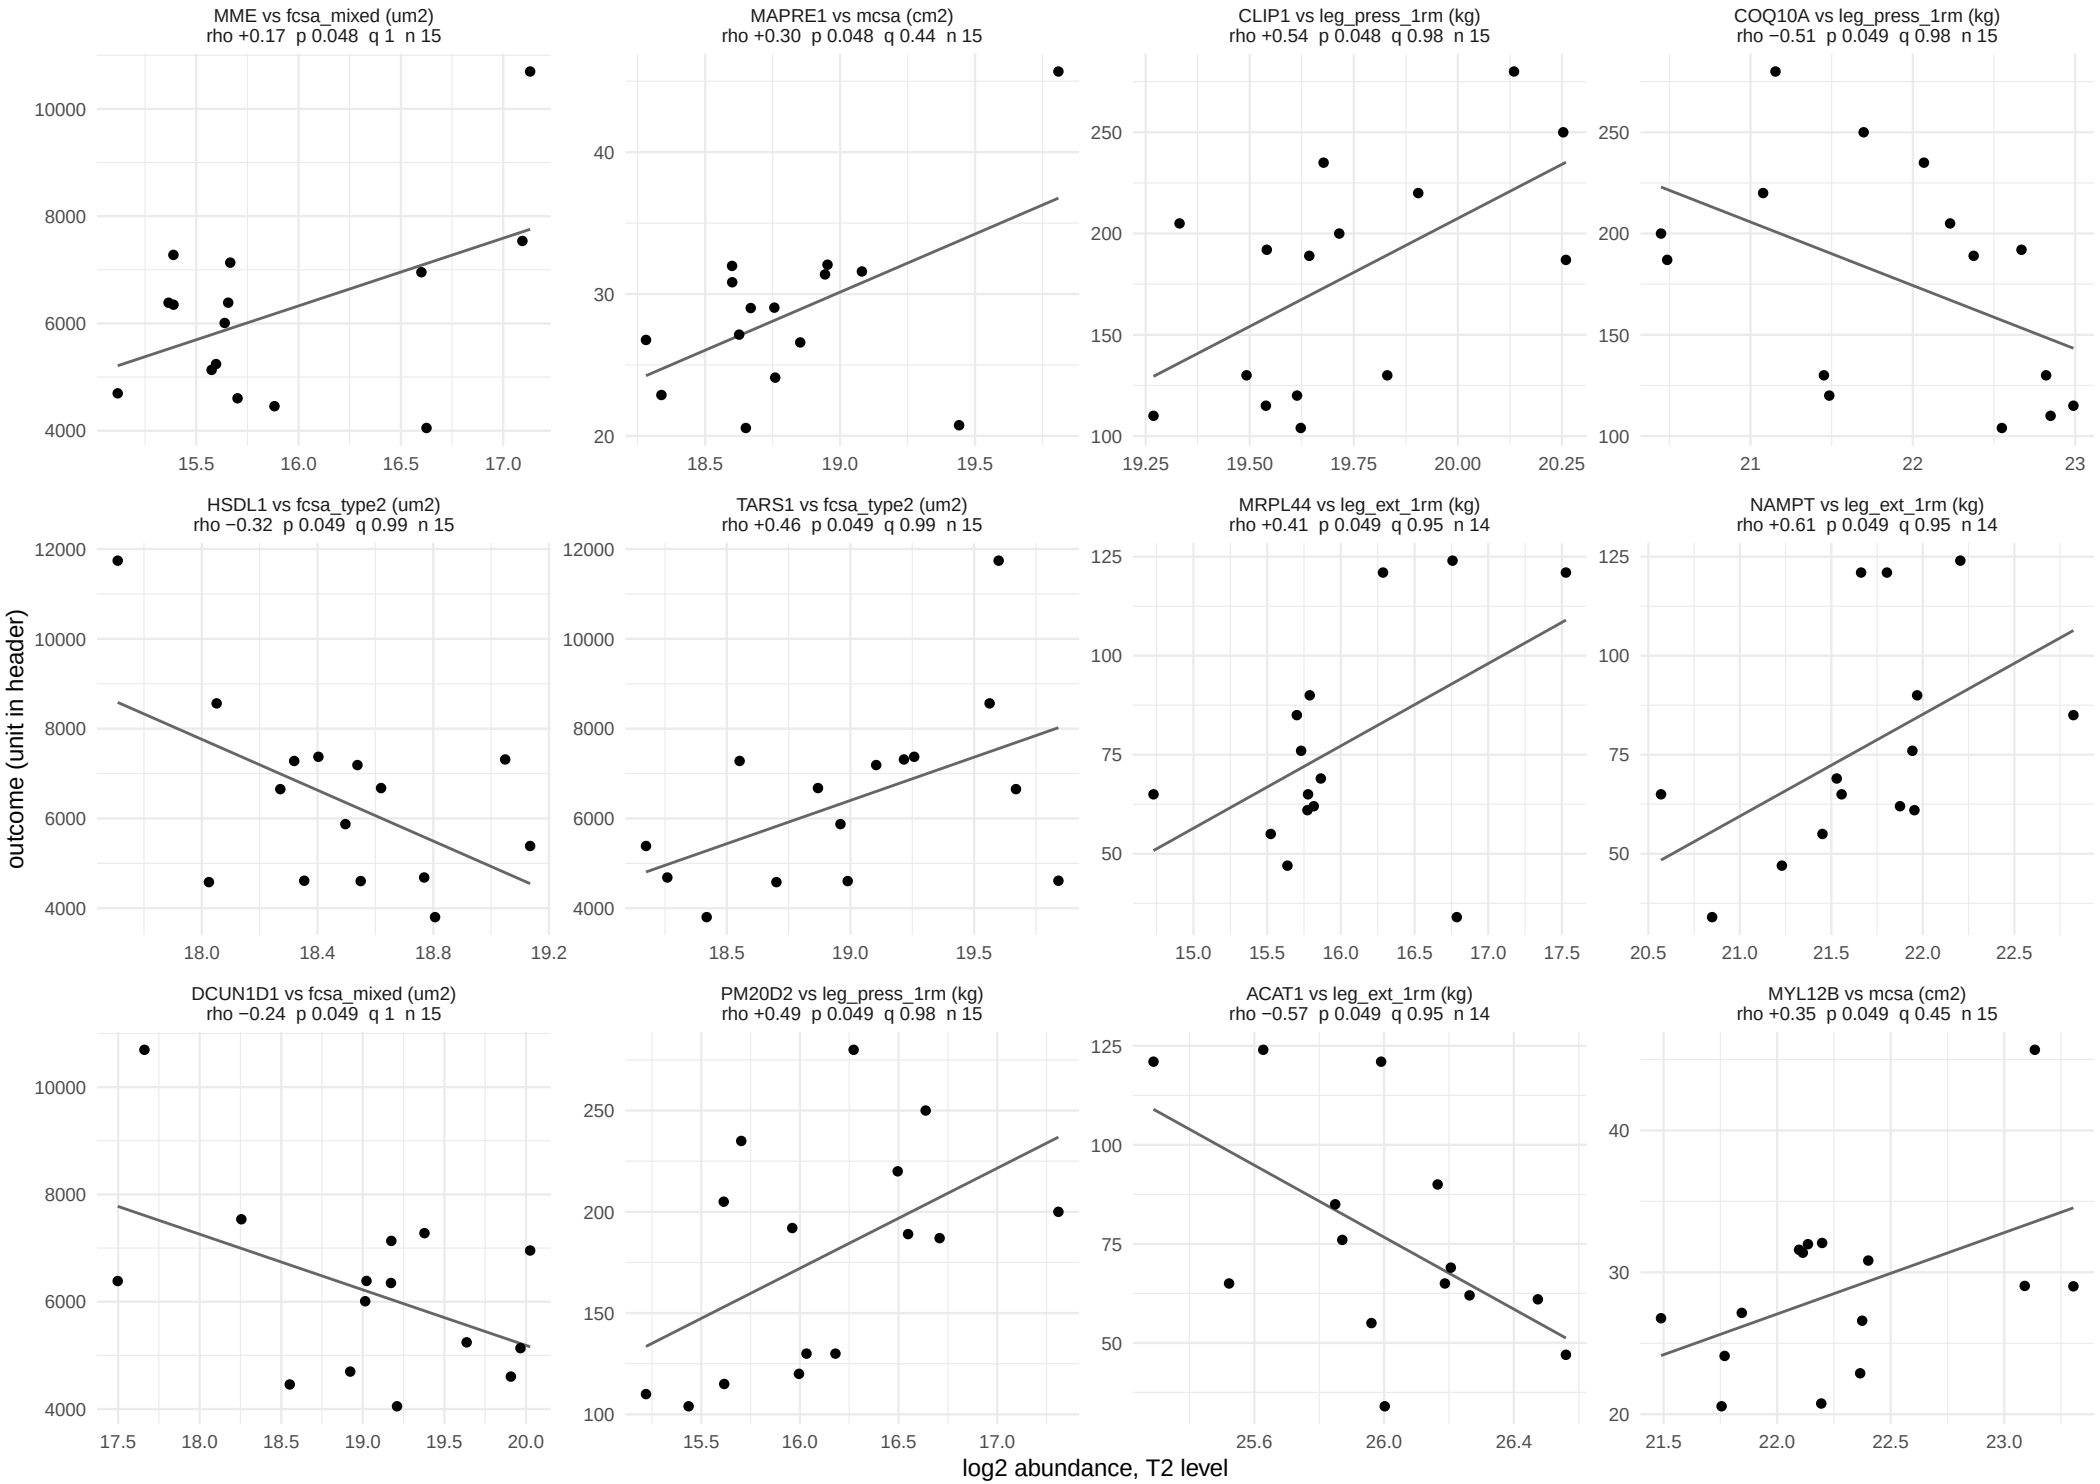

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, post_level window


555 of 11400 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 47 of 47.

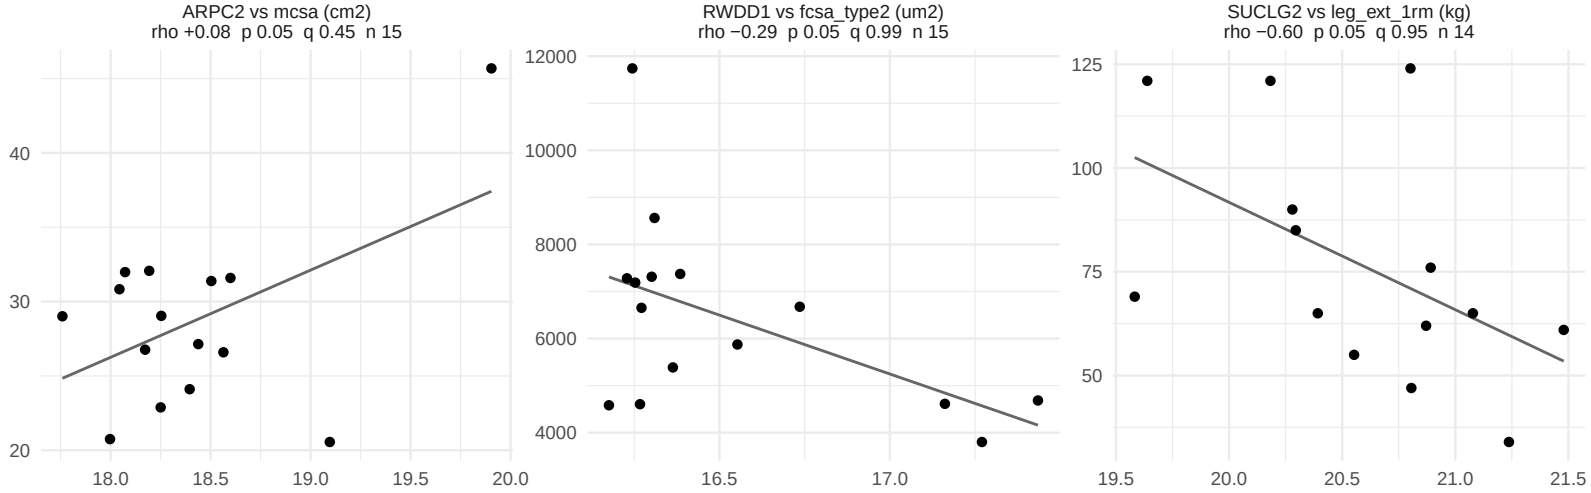

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, post_bout_level window


372 of 11400 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 1 of 31.

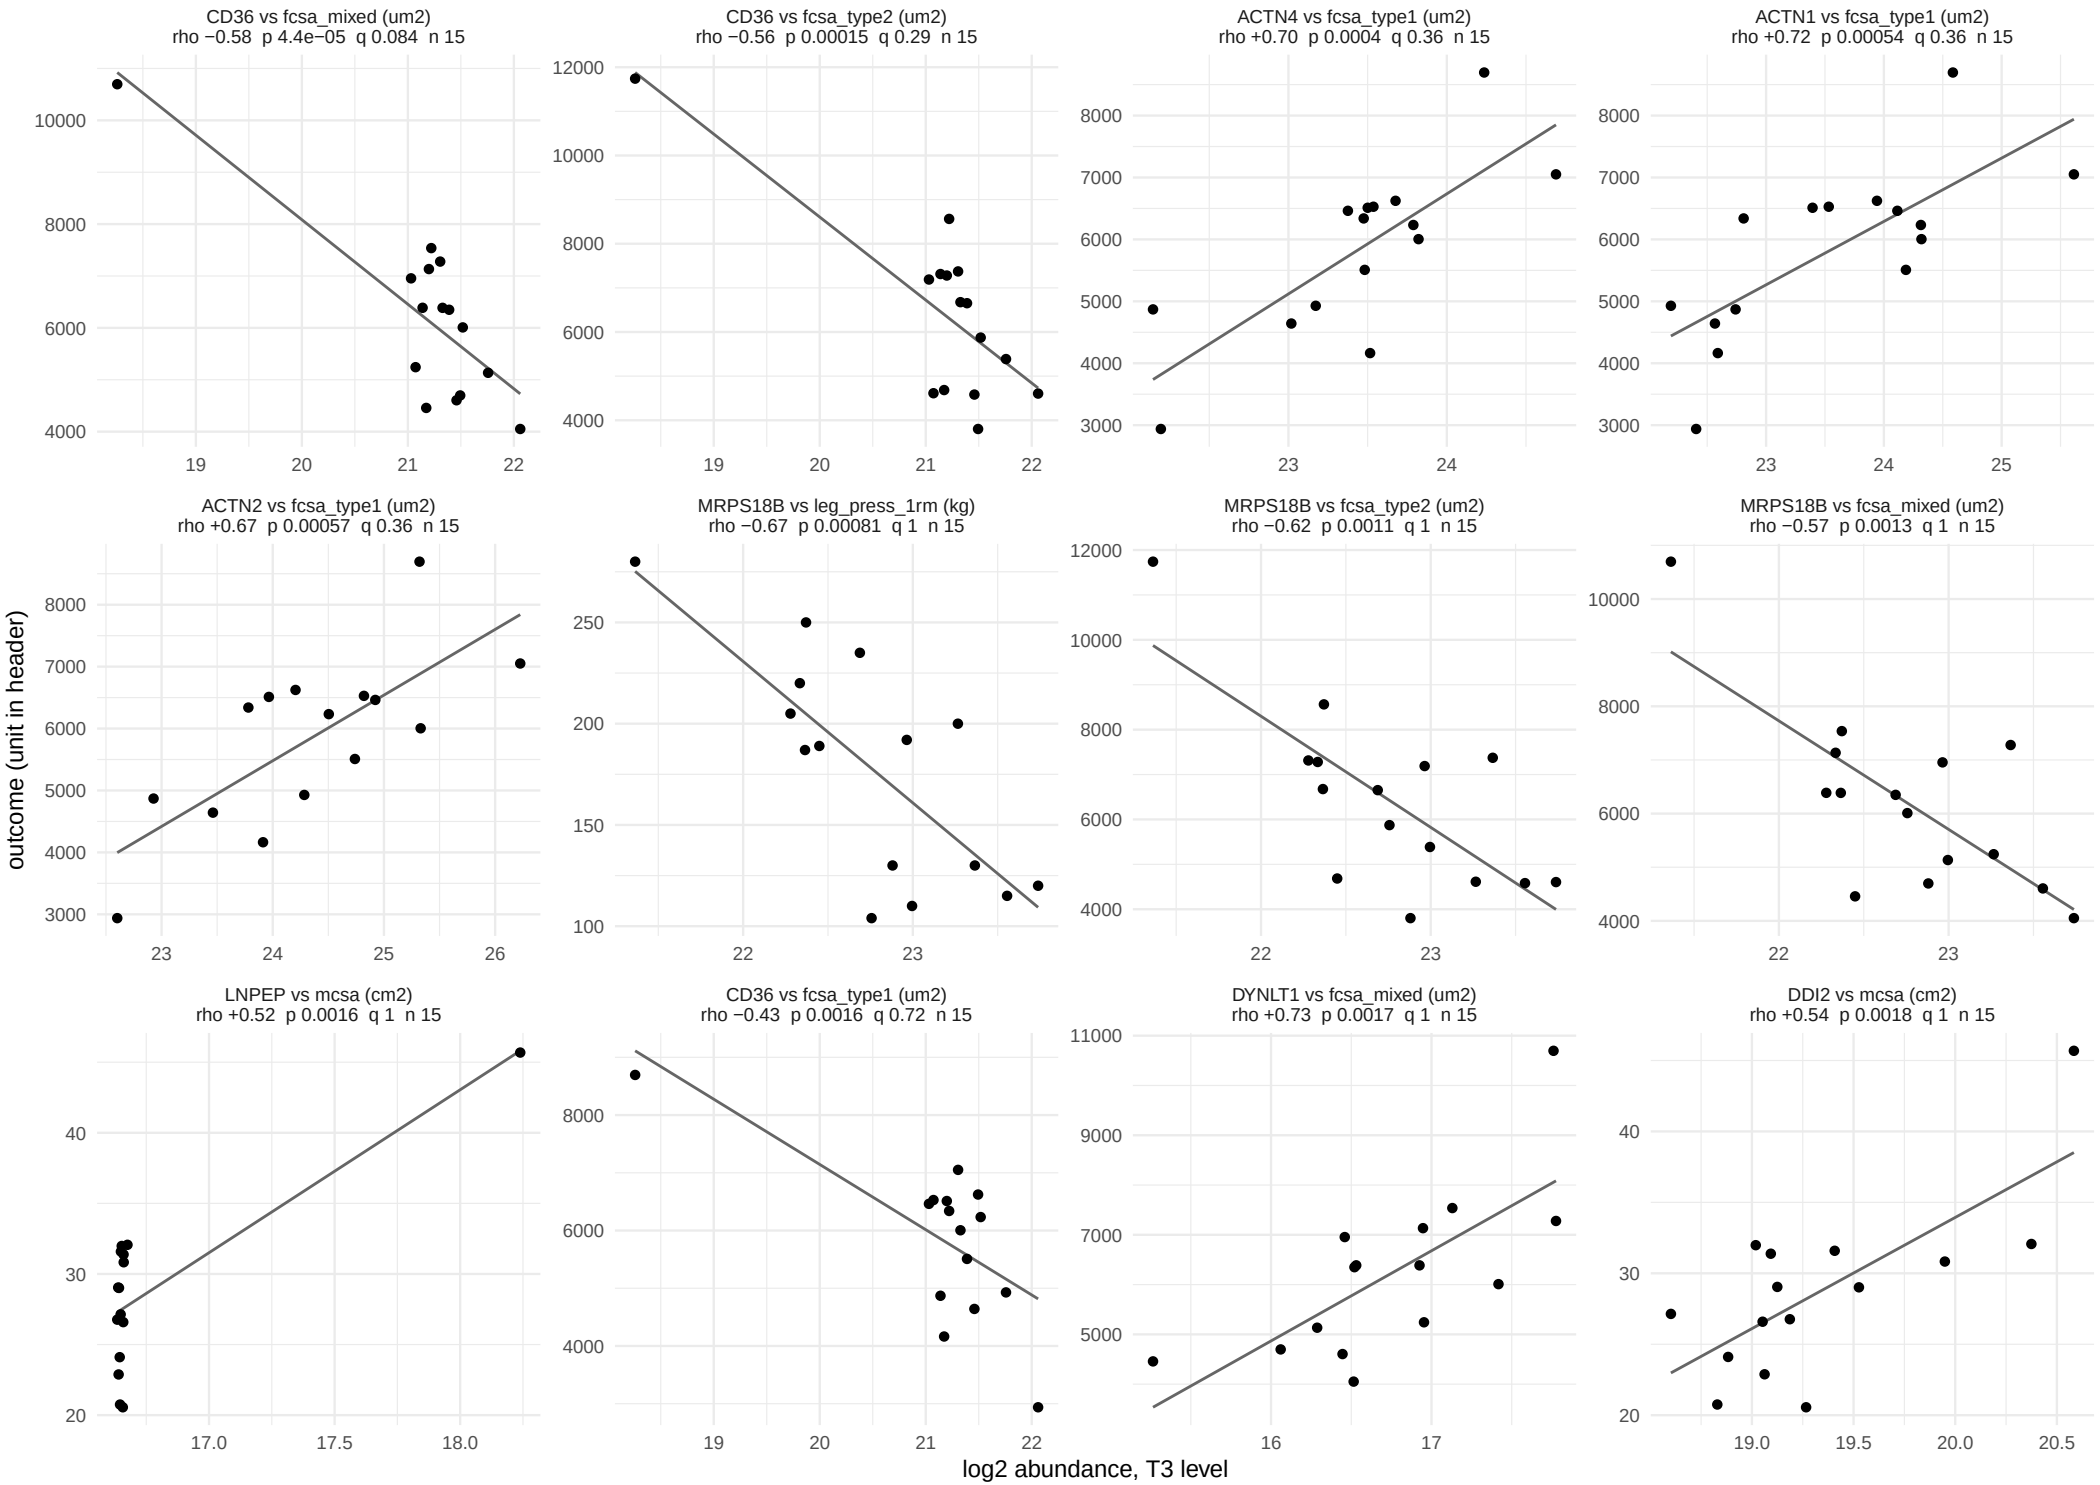

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, post_bout_level window


372 of 11400 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 2 of 31.

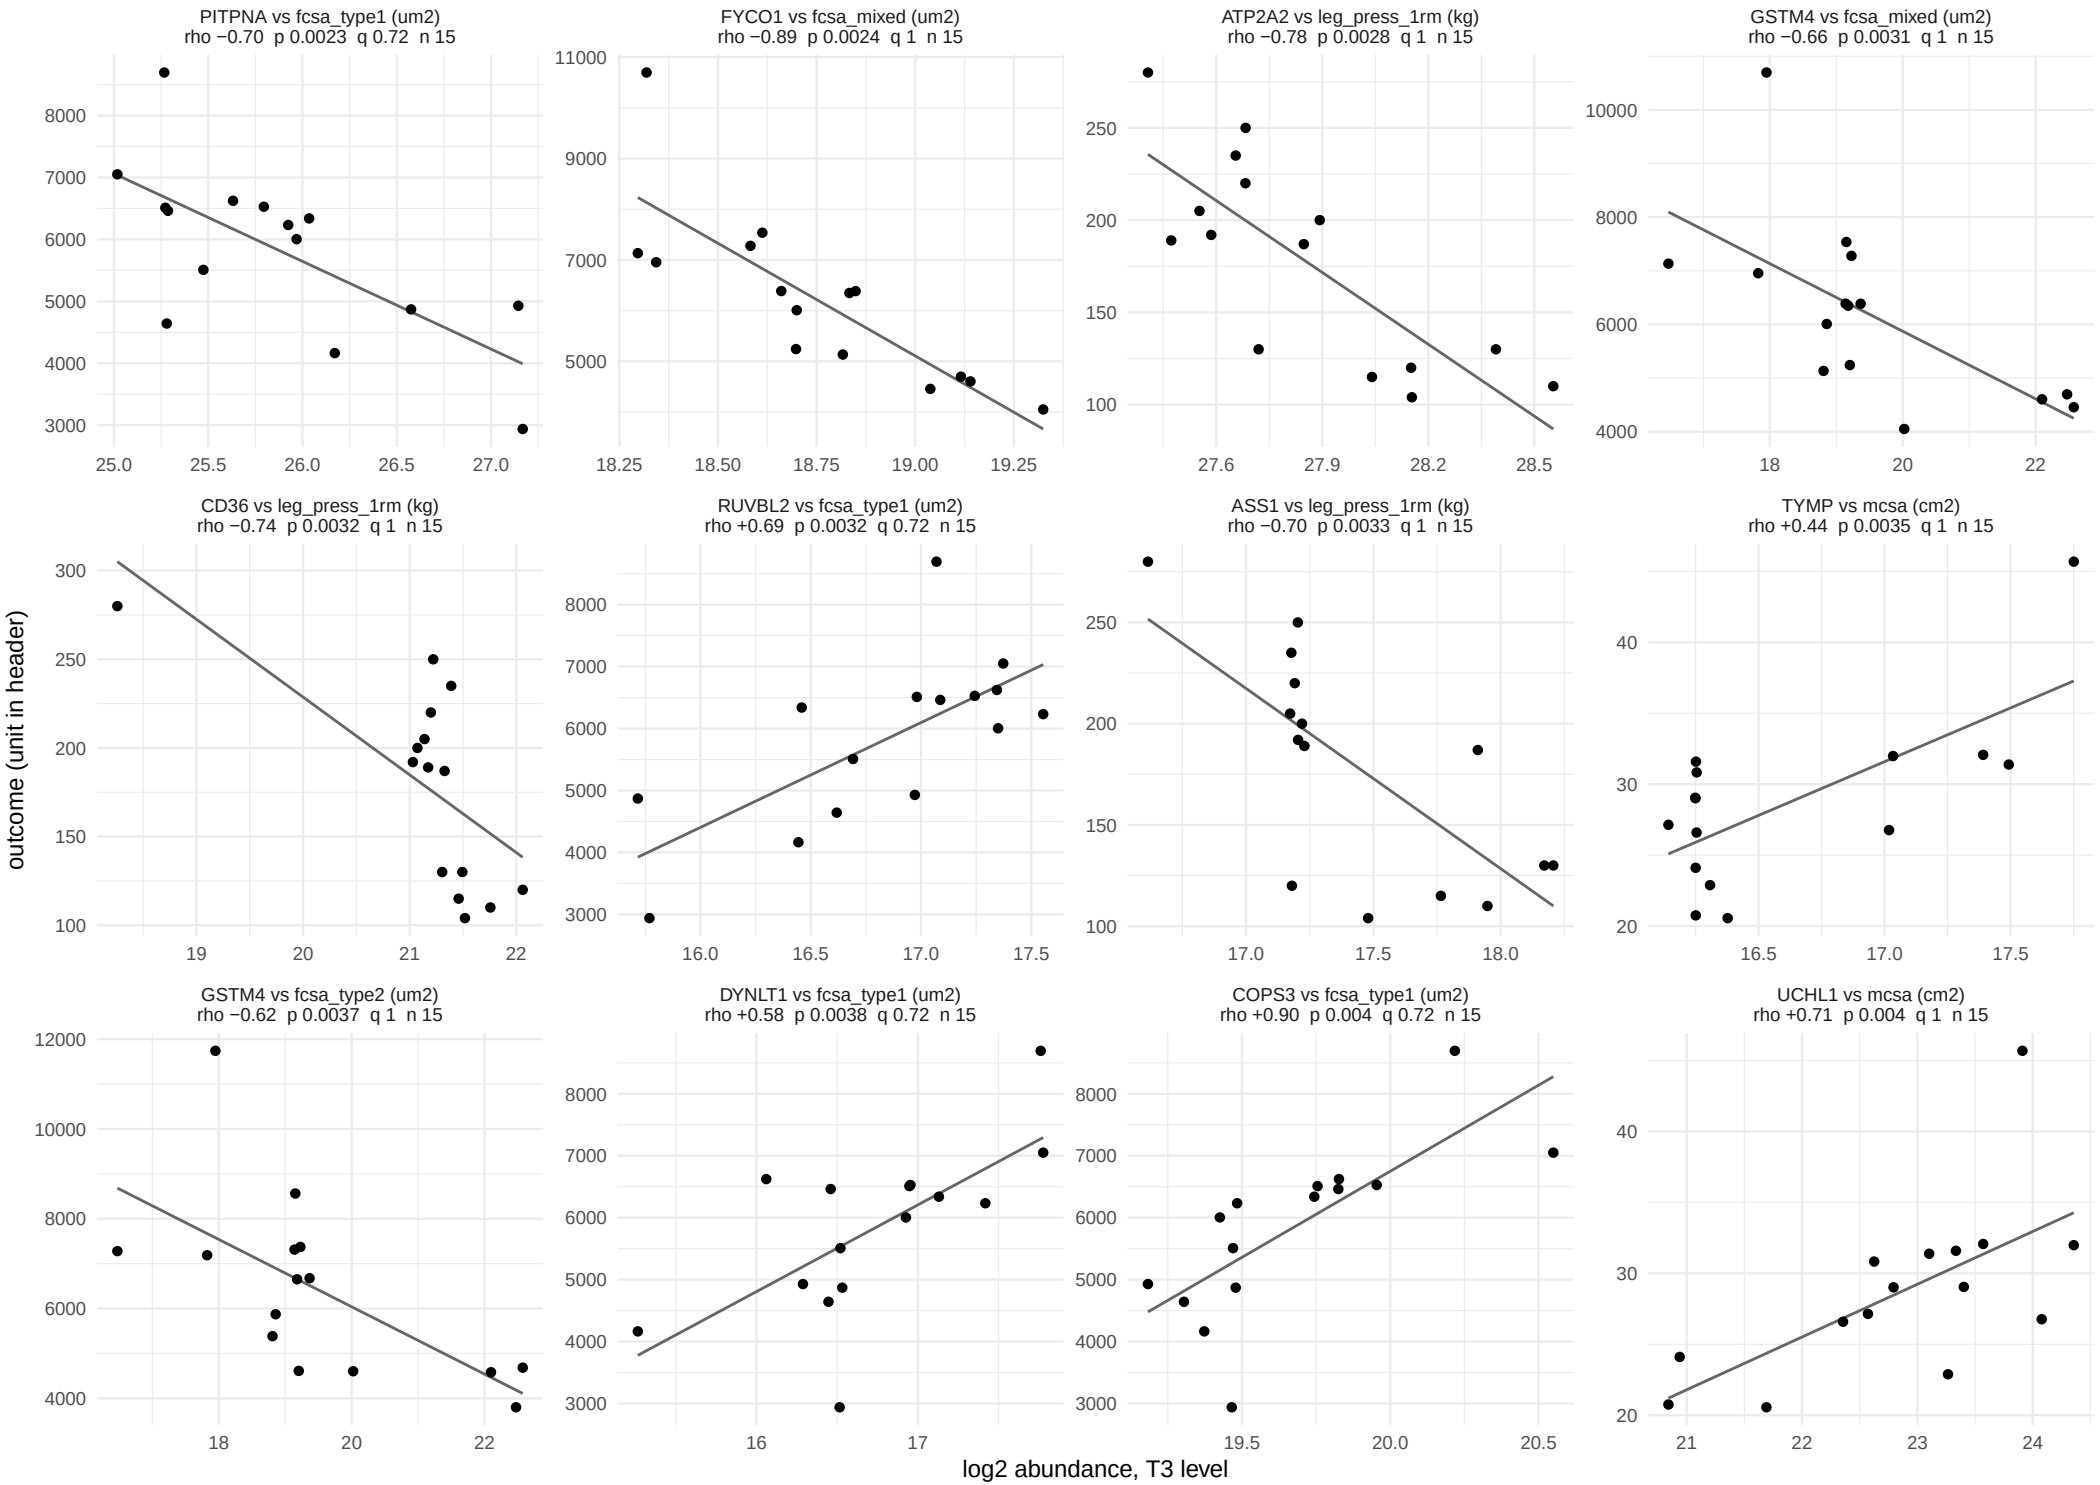

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, post_bout_level window


372 of 11400 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 3 of 31.

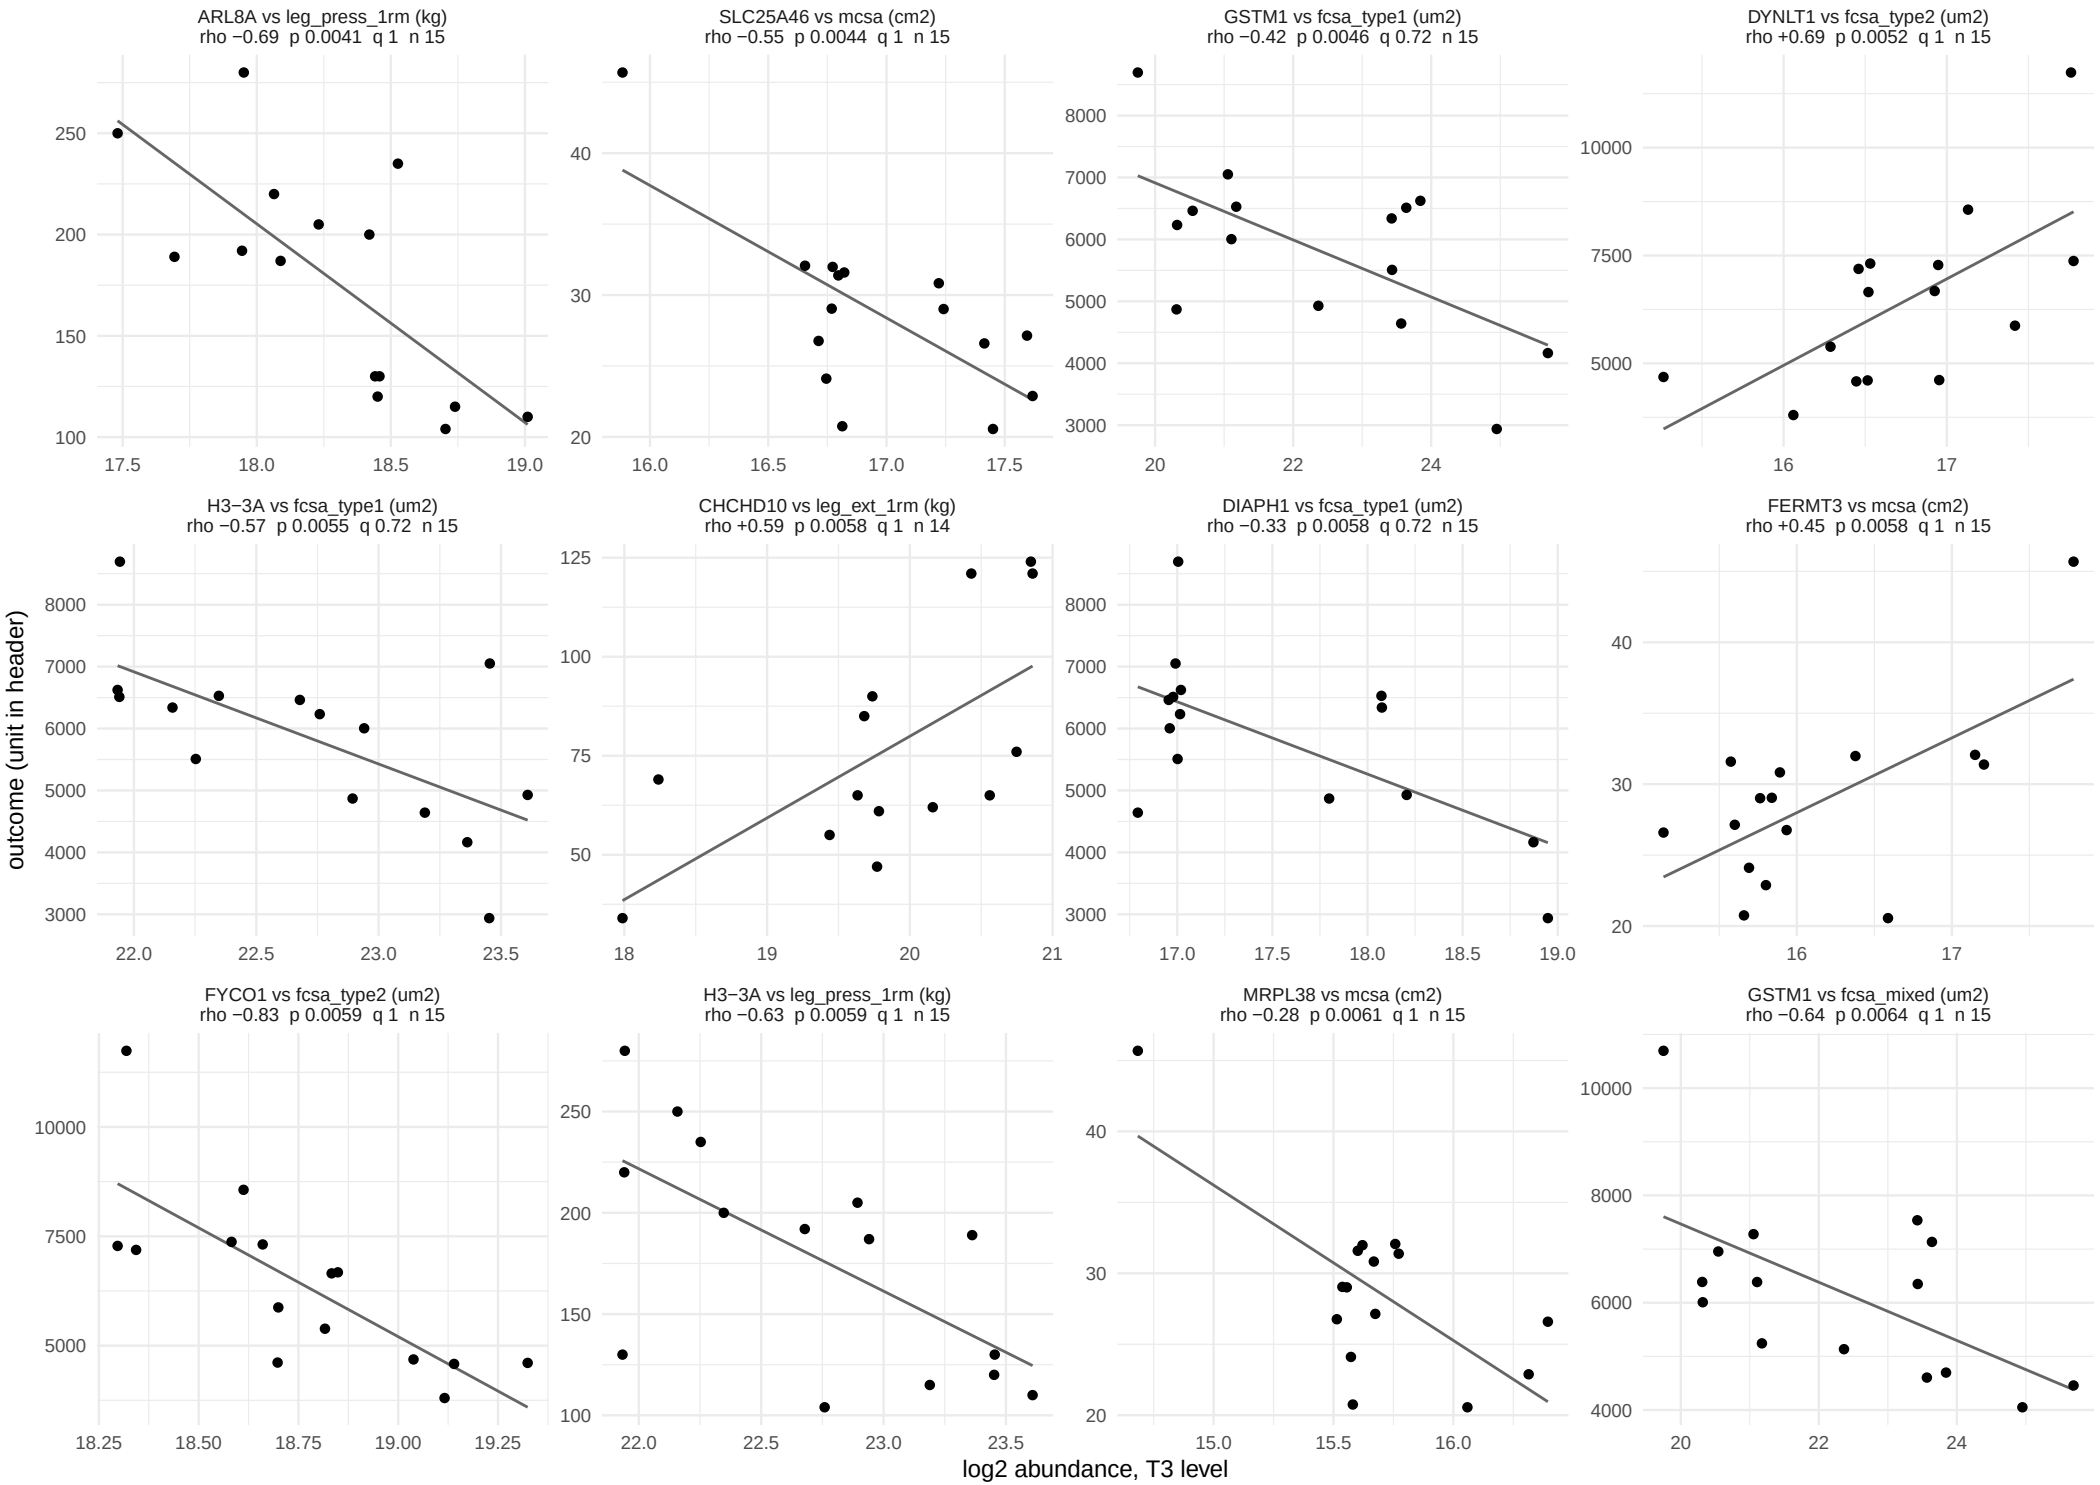

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, post_bout_level window


372 of 11400 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 4 of 31.

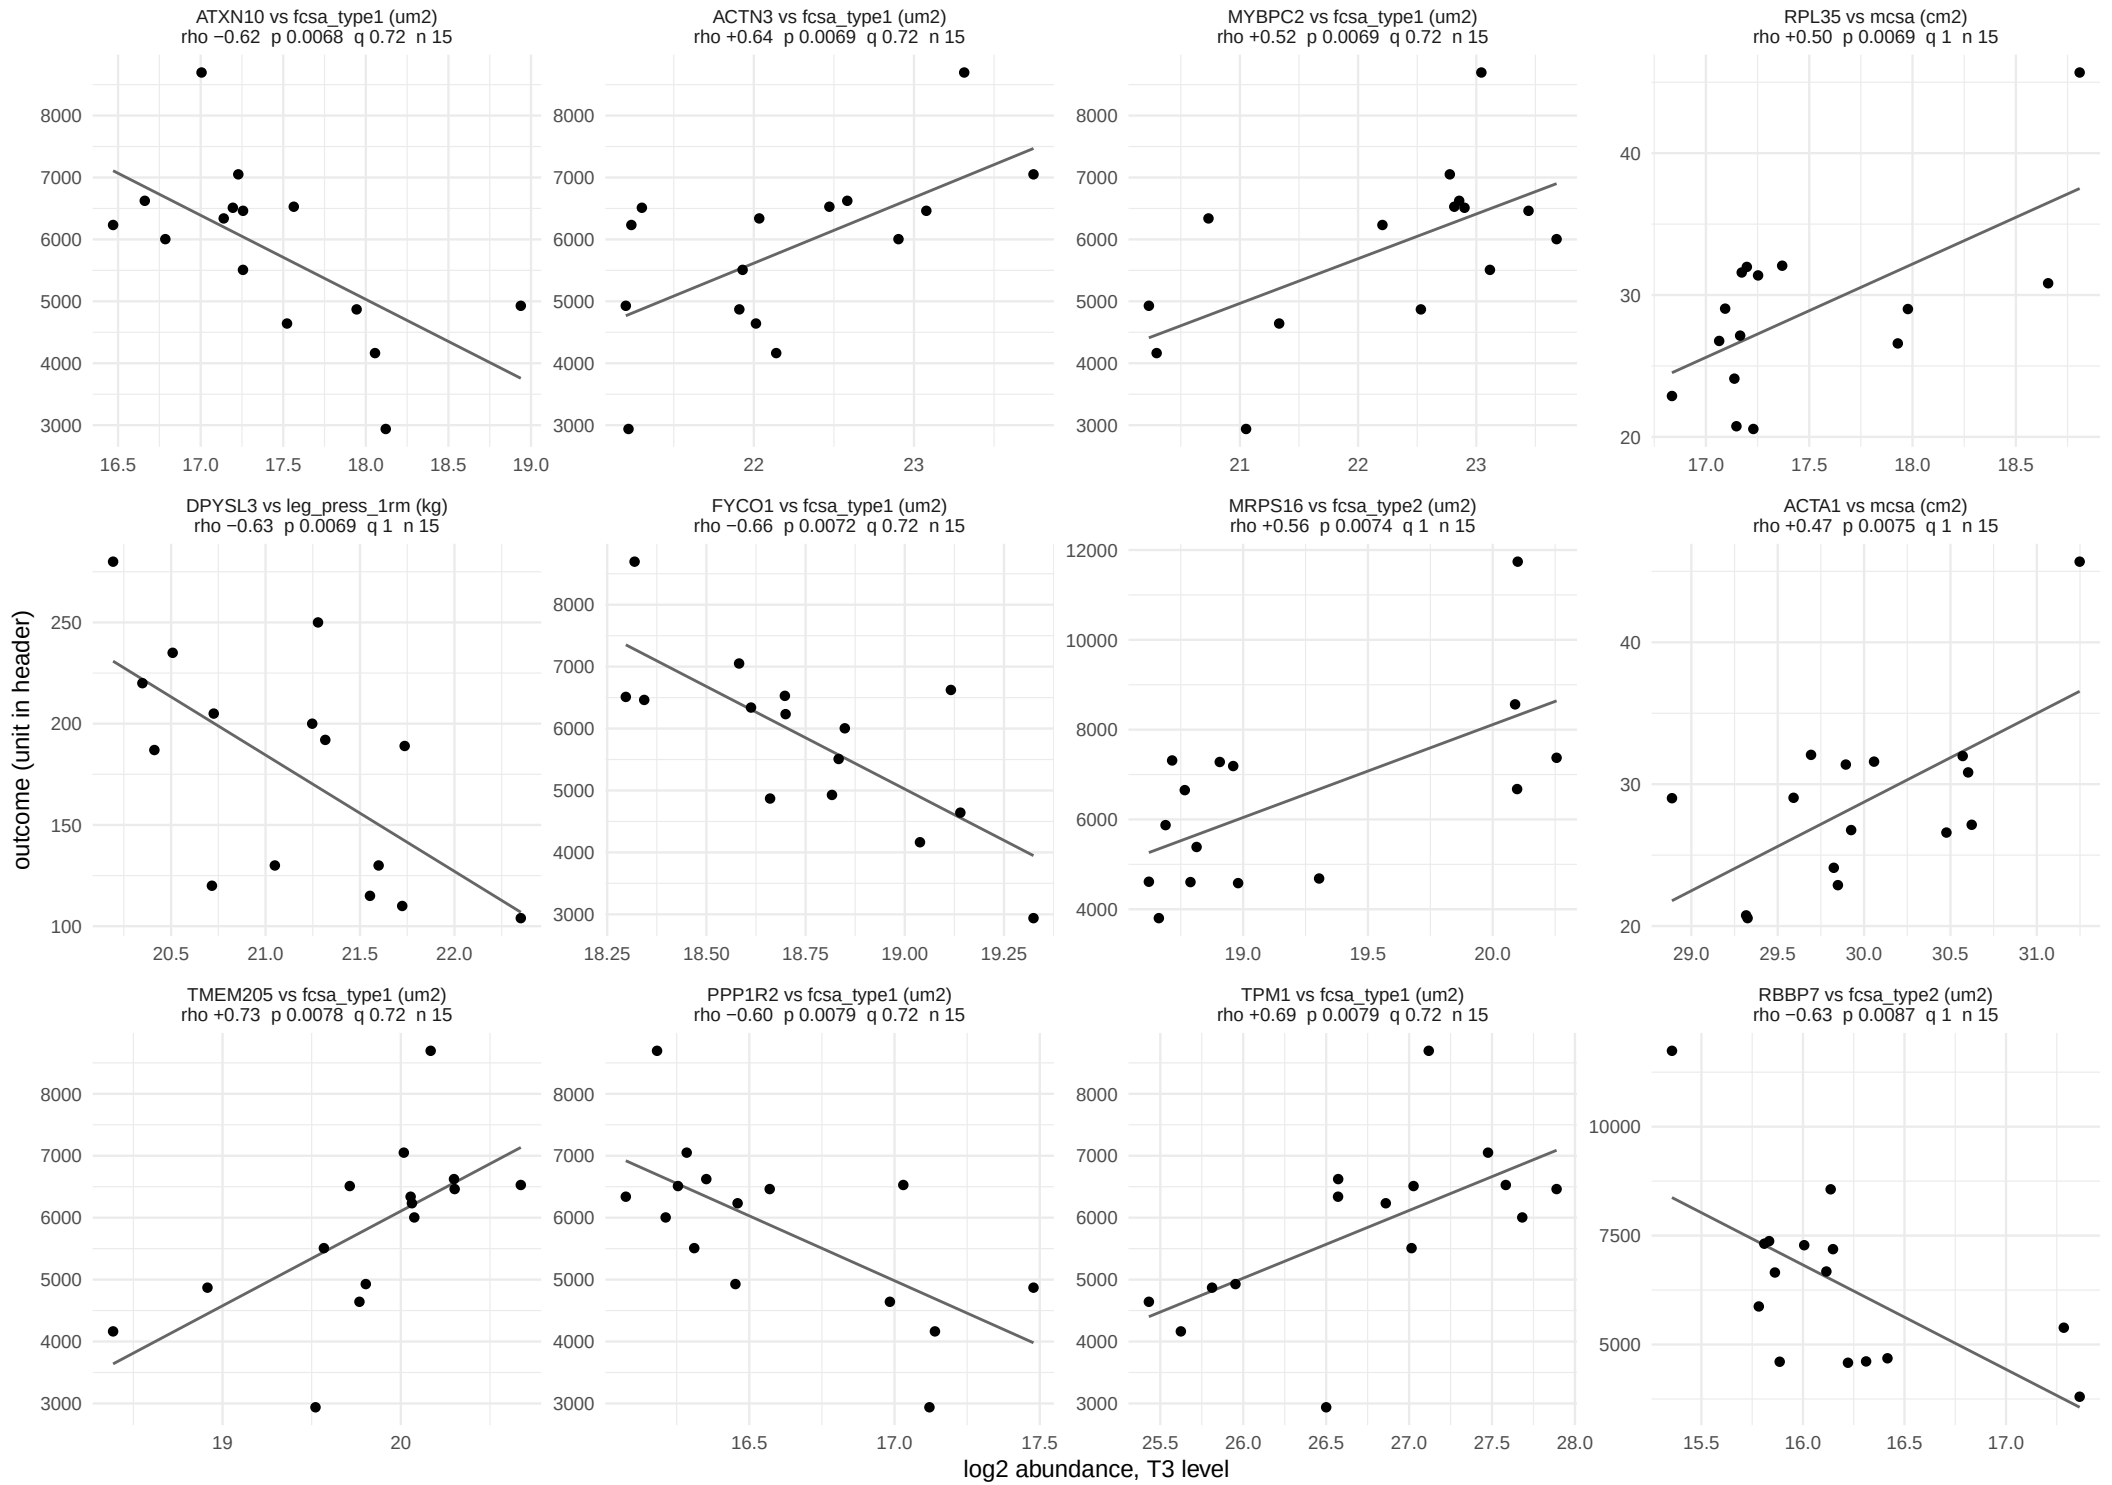

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, post_bout_level window


372 of 11400 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 5 of 31.

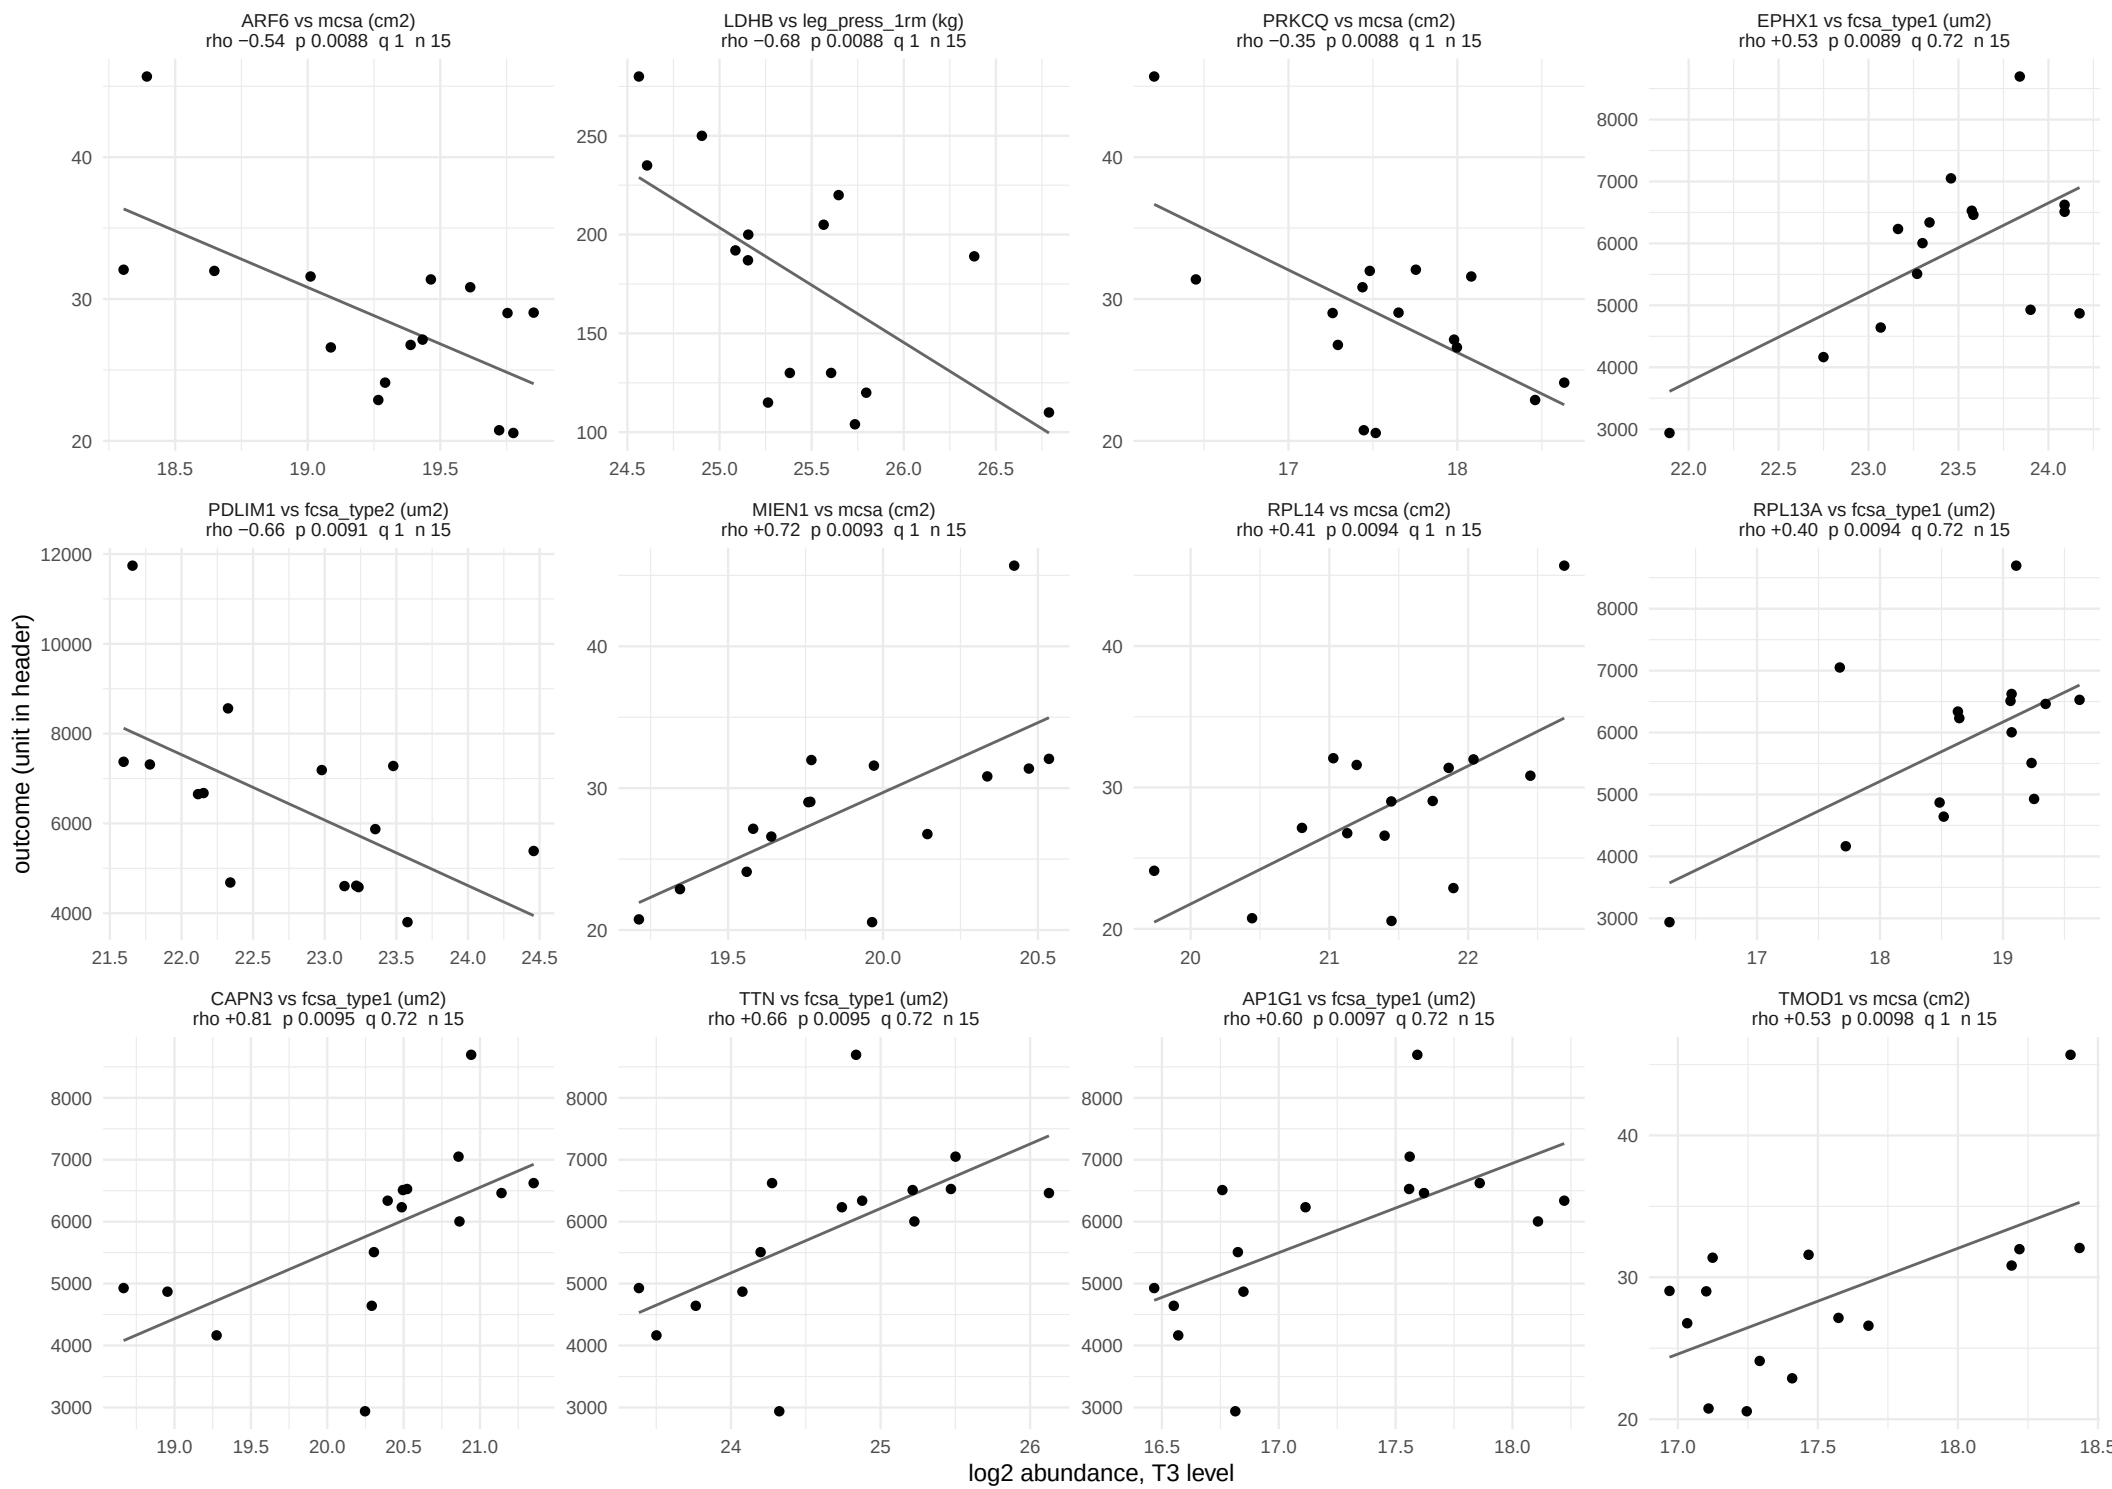

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, post_bout_level window


372 of 11400 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 6 of 31.

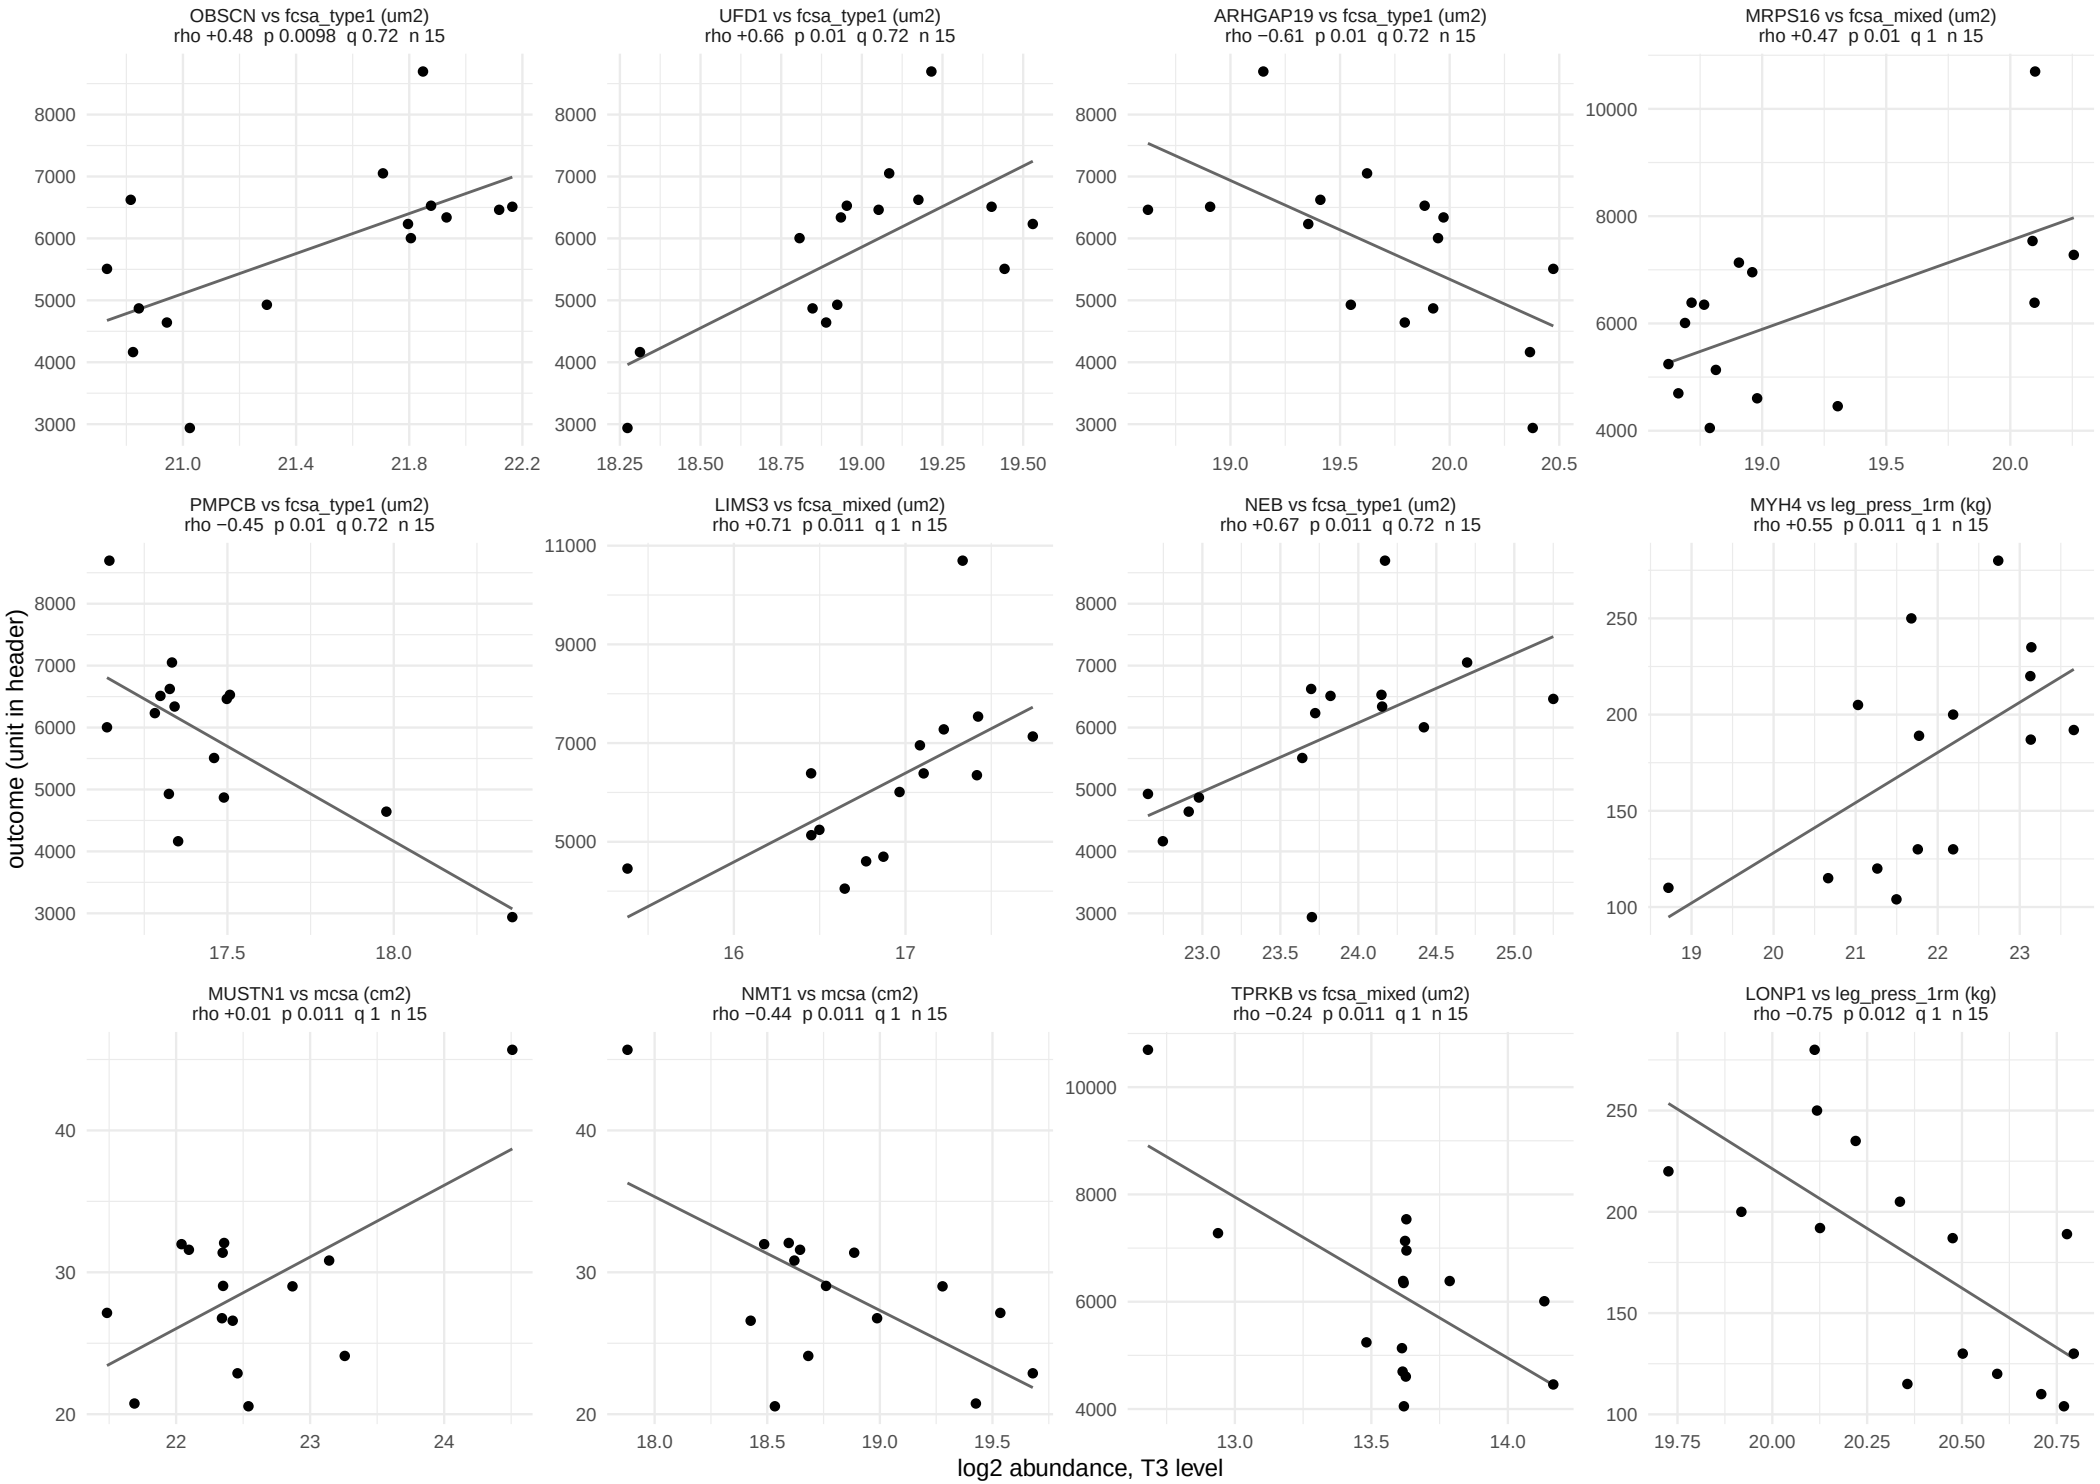

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, post_bout_level window


372 of 11400 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 7 of 31.

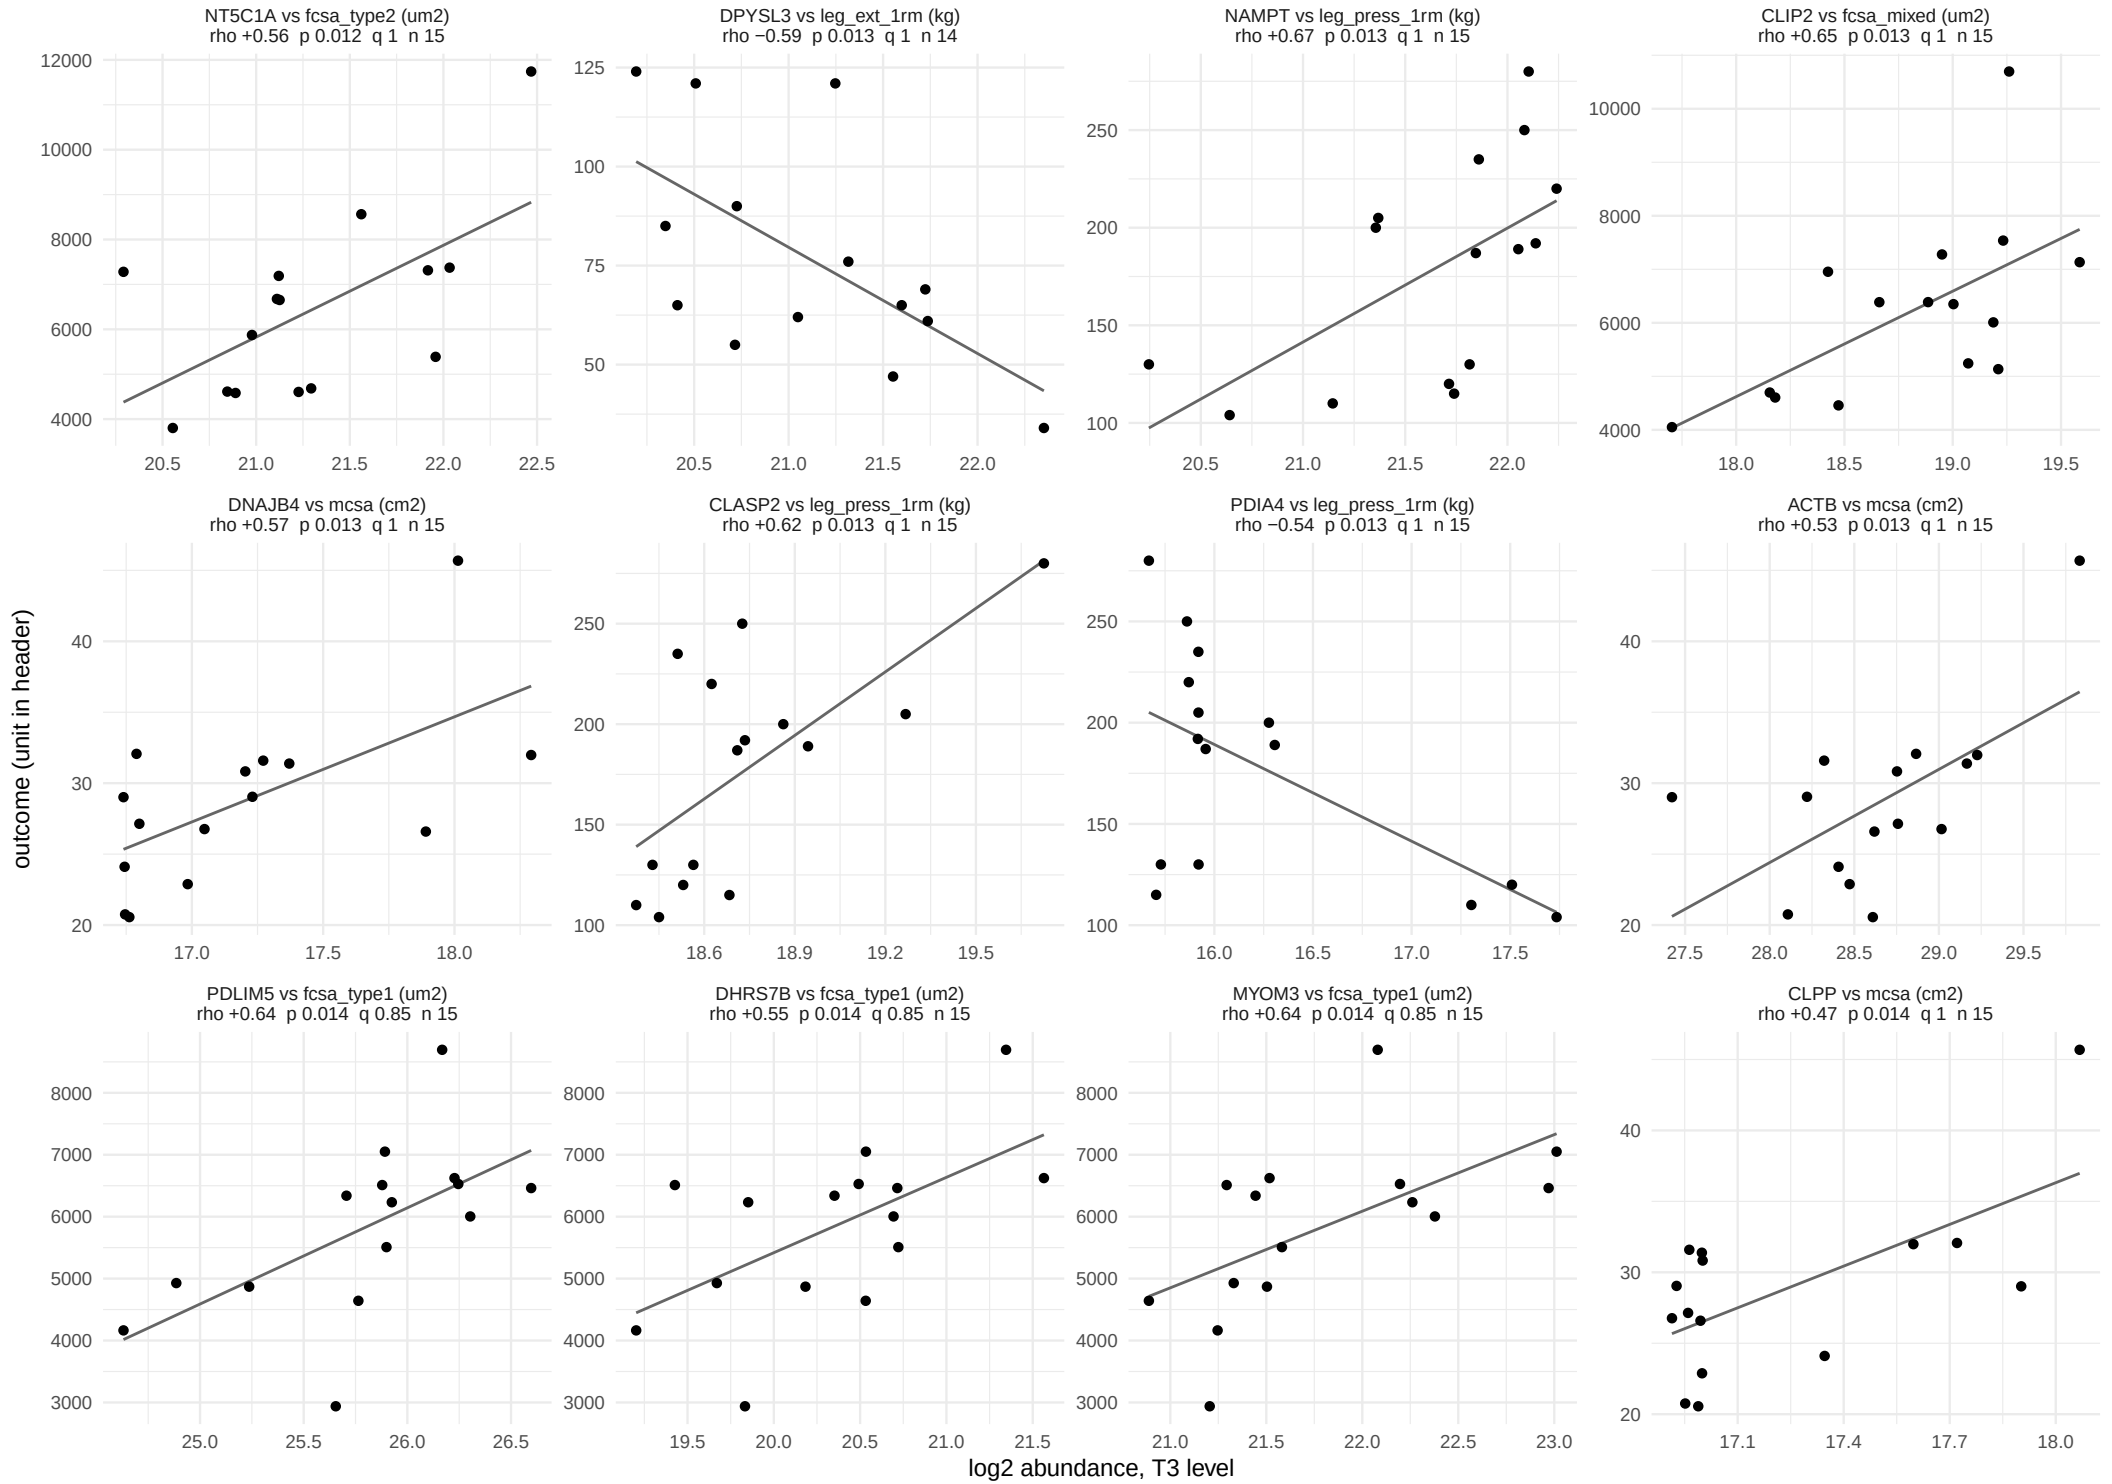

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, post_bout_level window


372 of 11400 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 8 of 31.

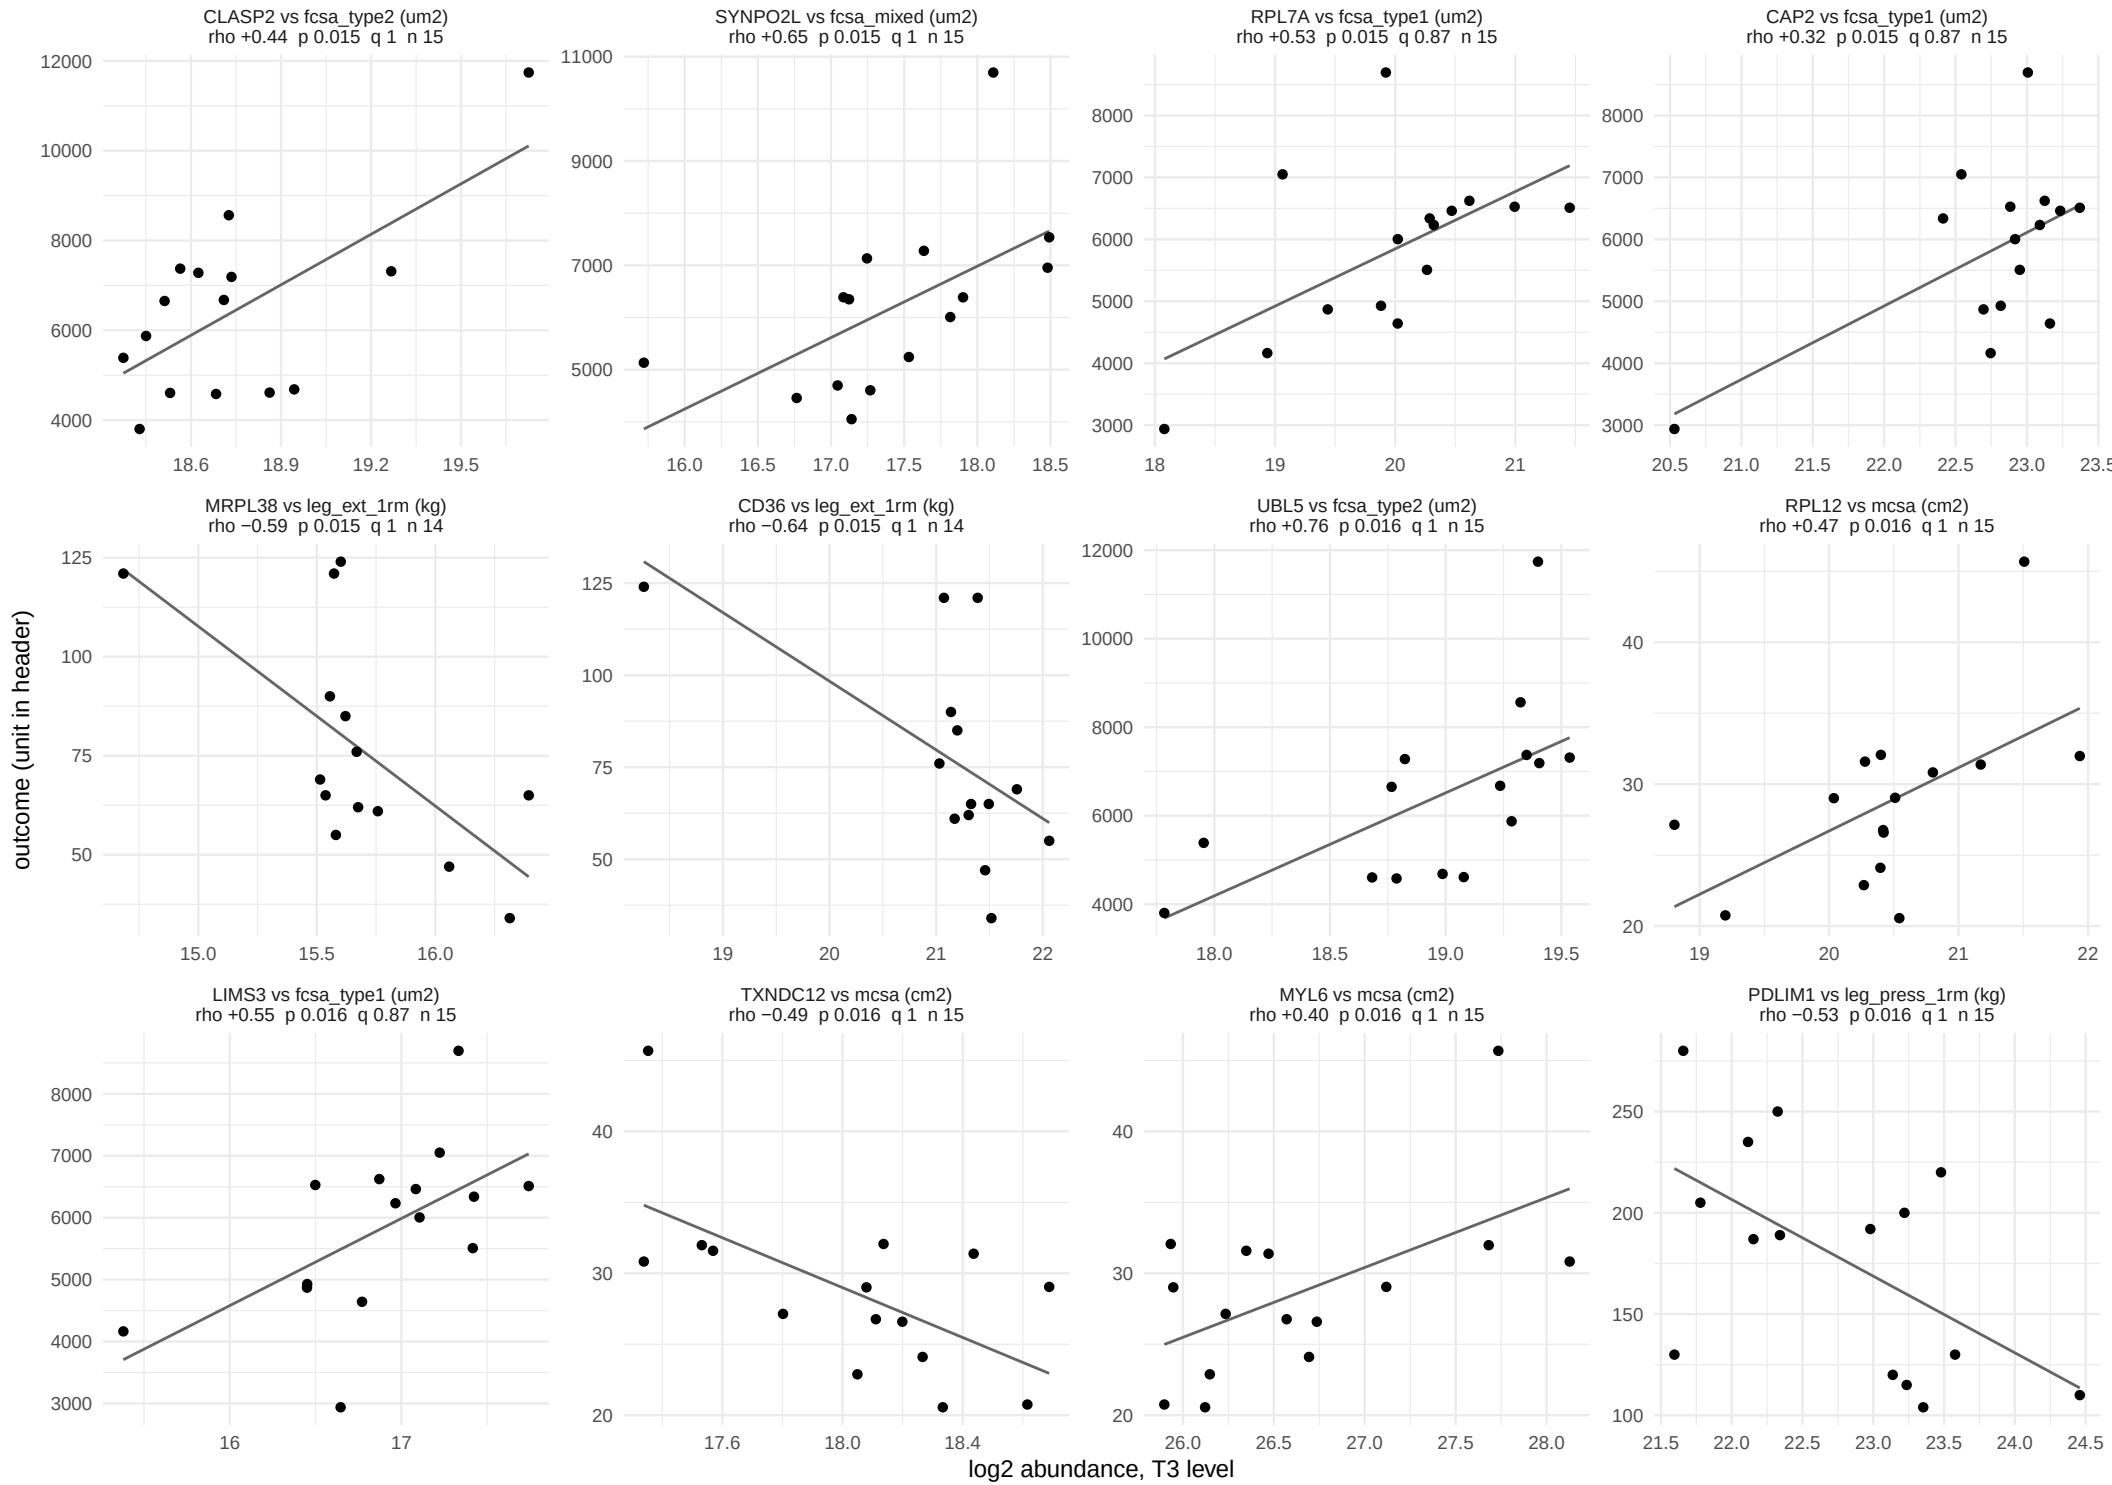

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, post_bout_level window


372 of 11400 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 9 of 31.

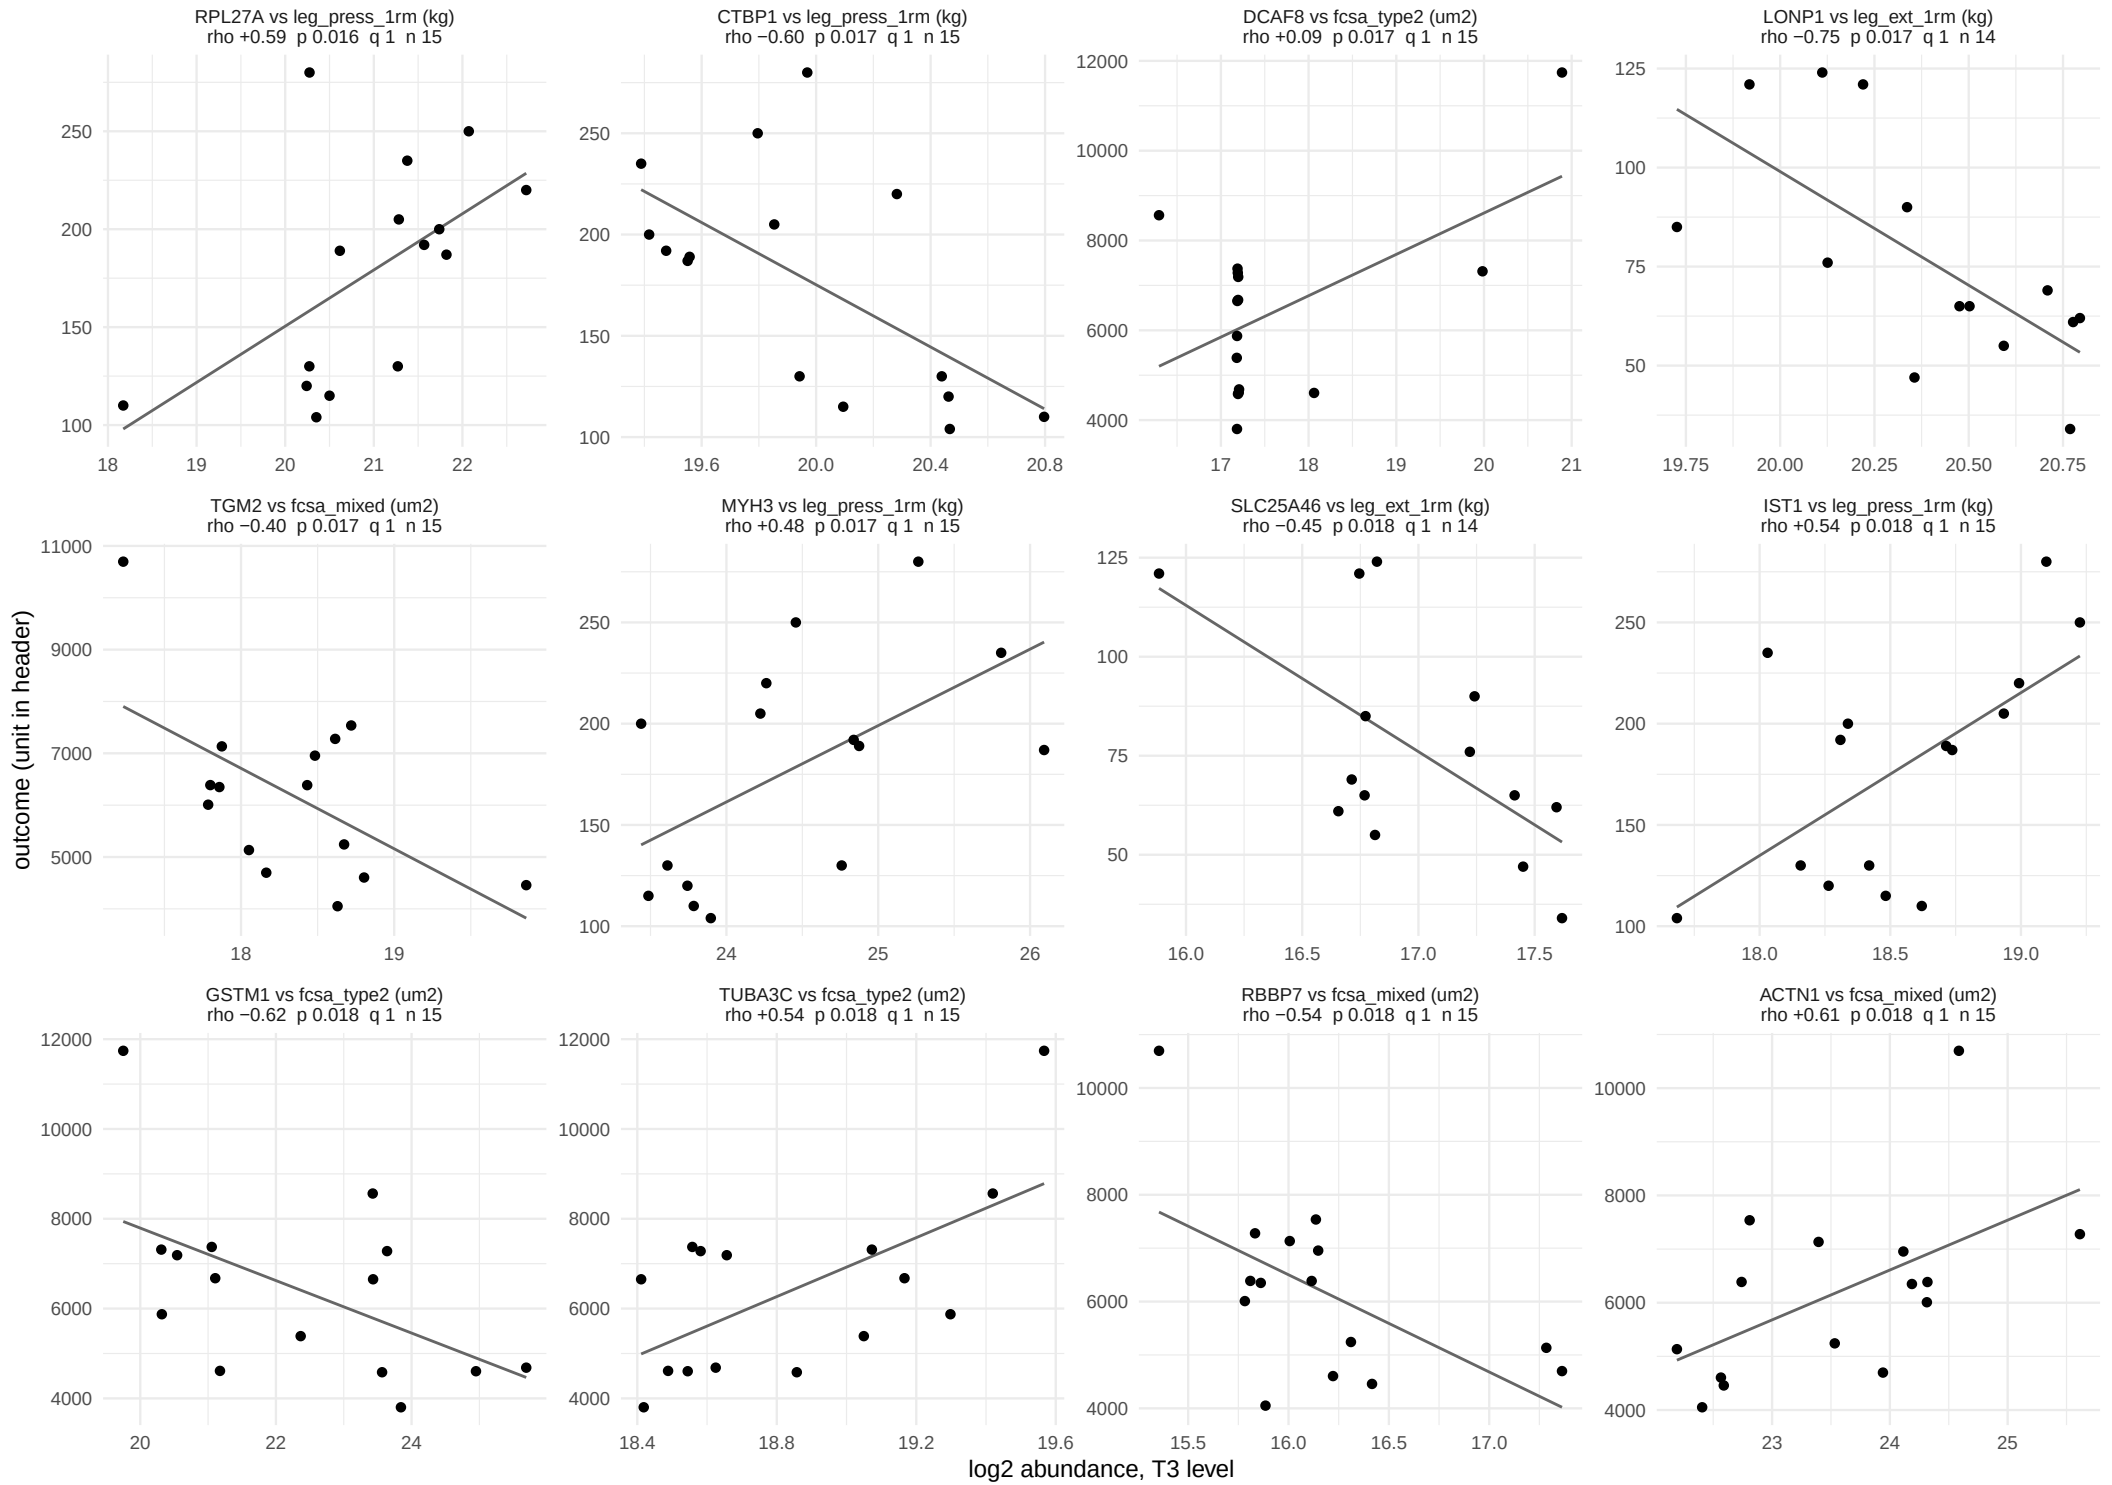

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, post_bout_level window


372 of 11400 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 10 of 31.

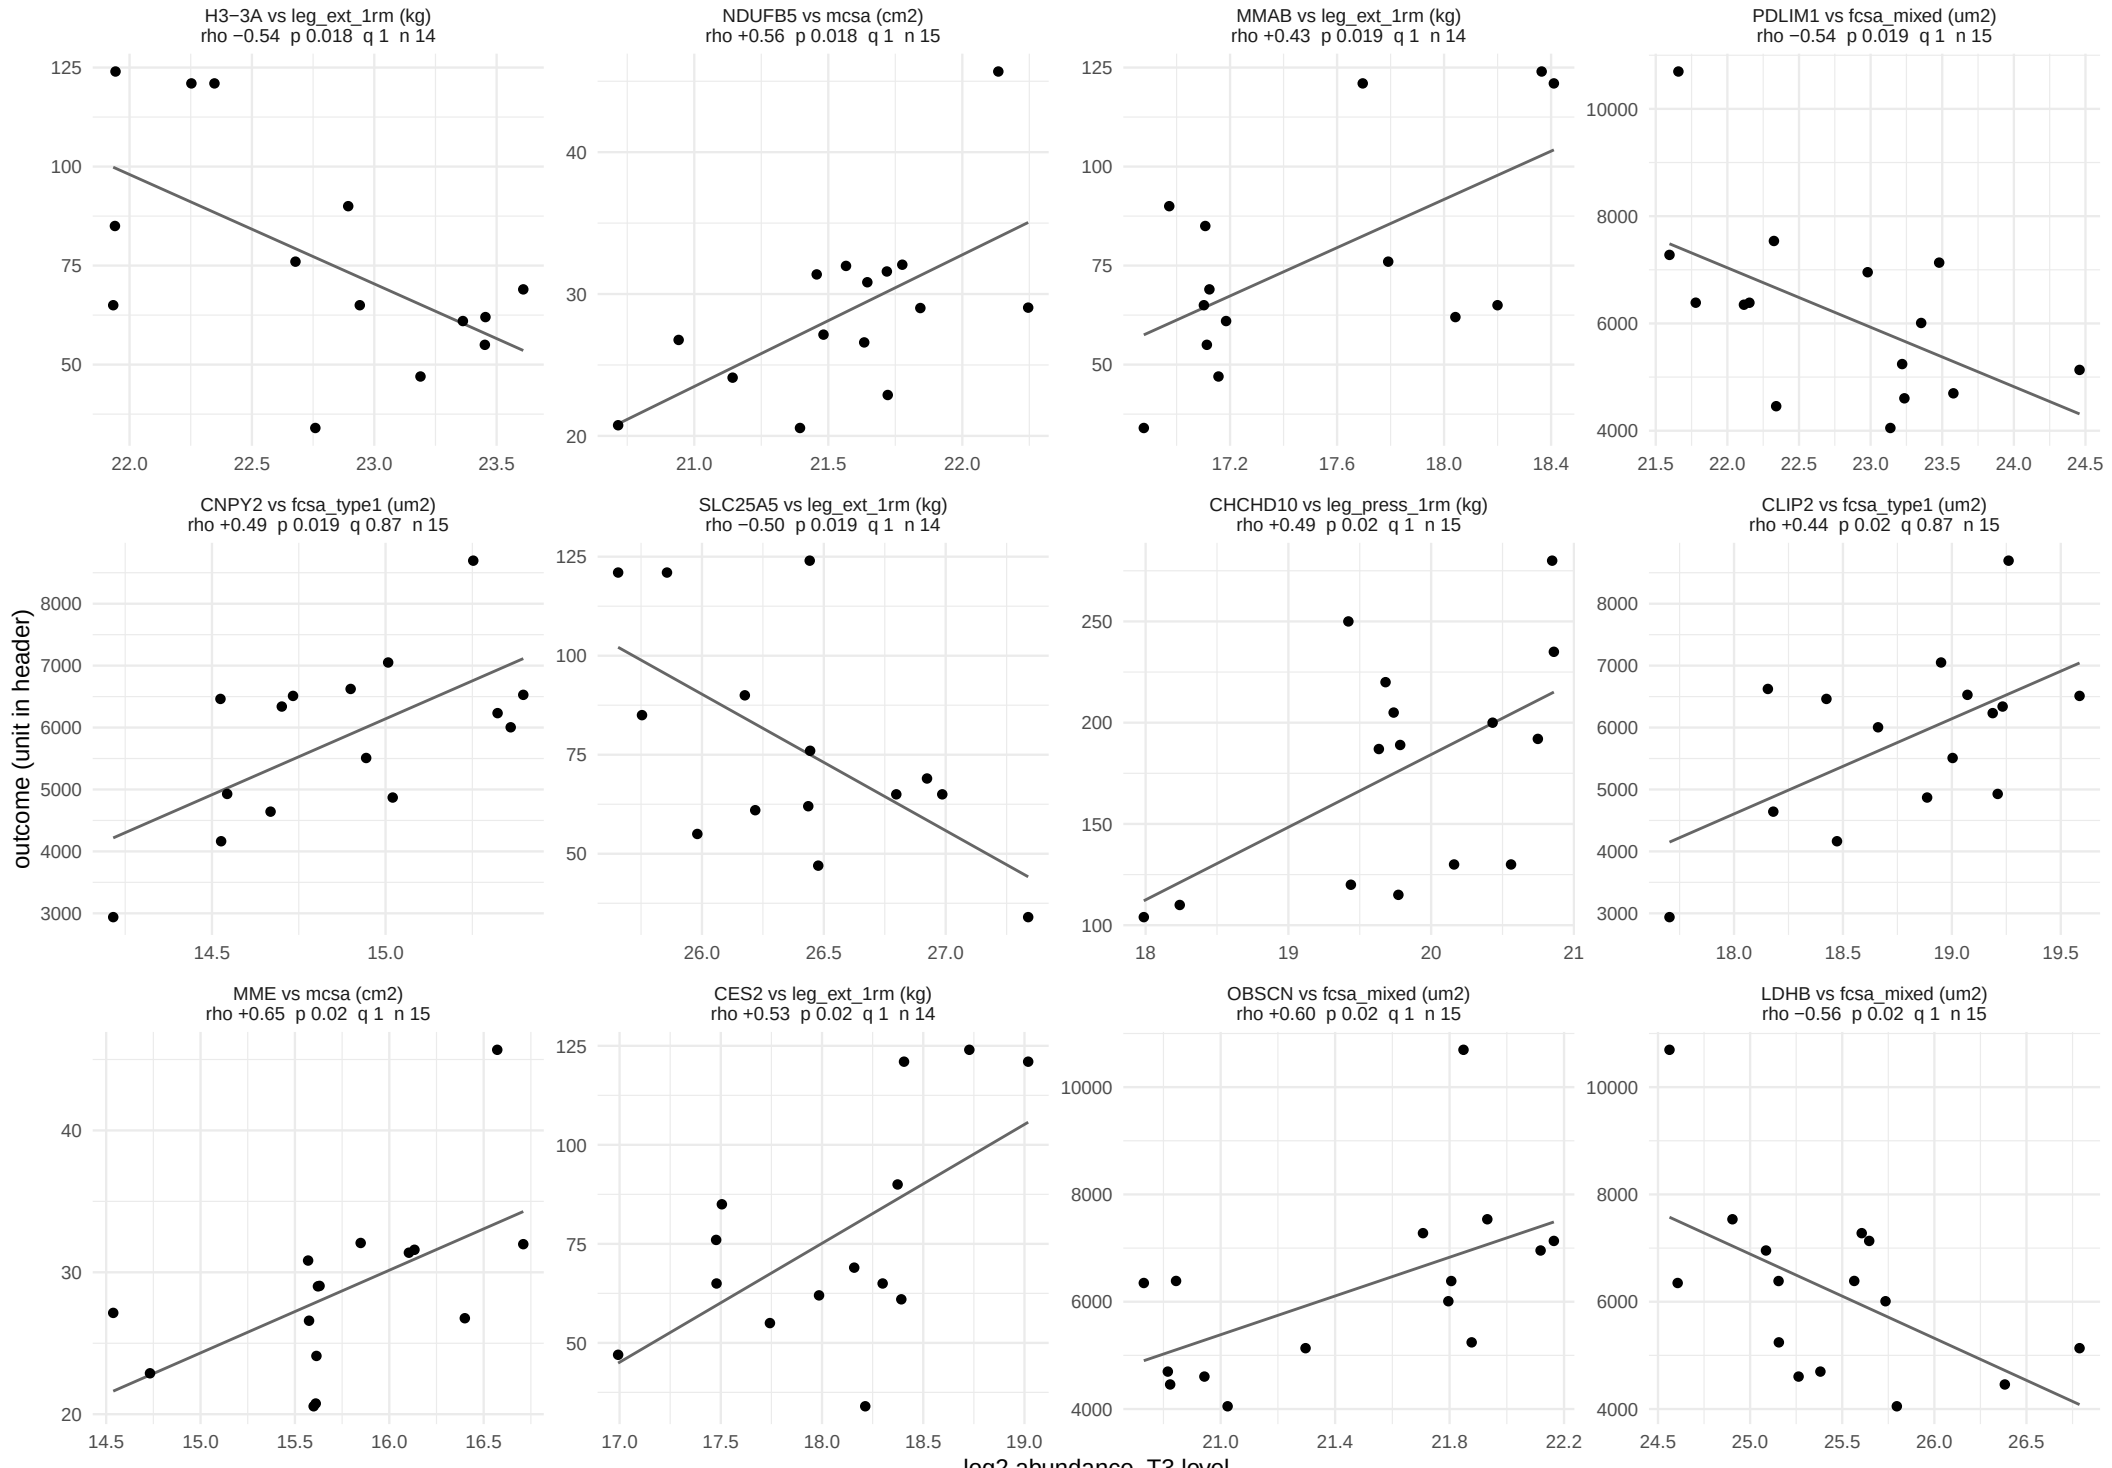

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, post_bout_level window


372 of 11400 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 11 of 31.

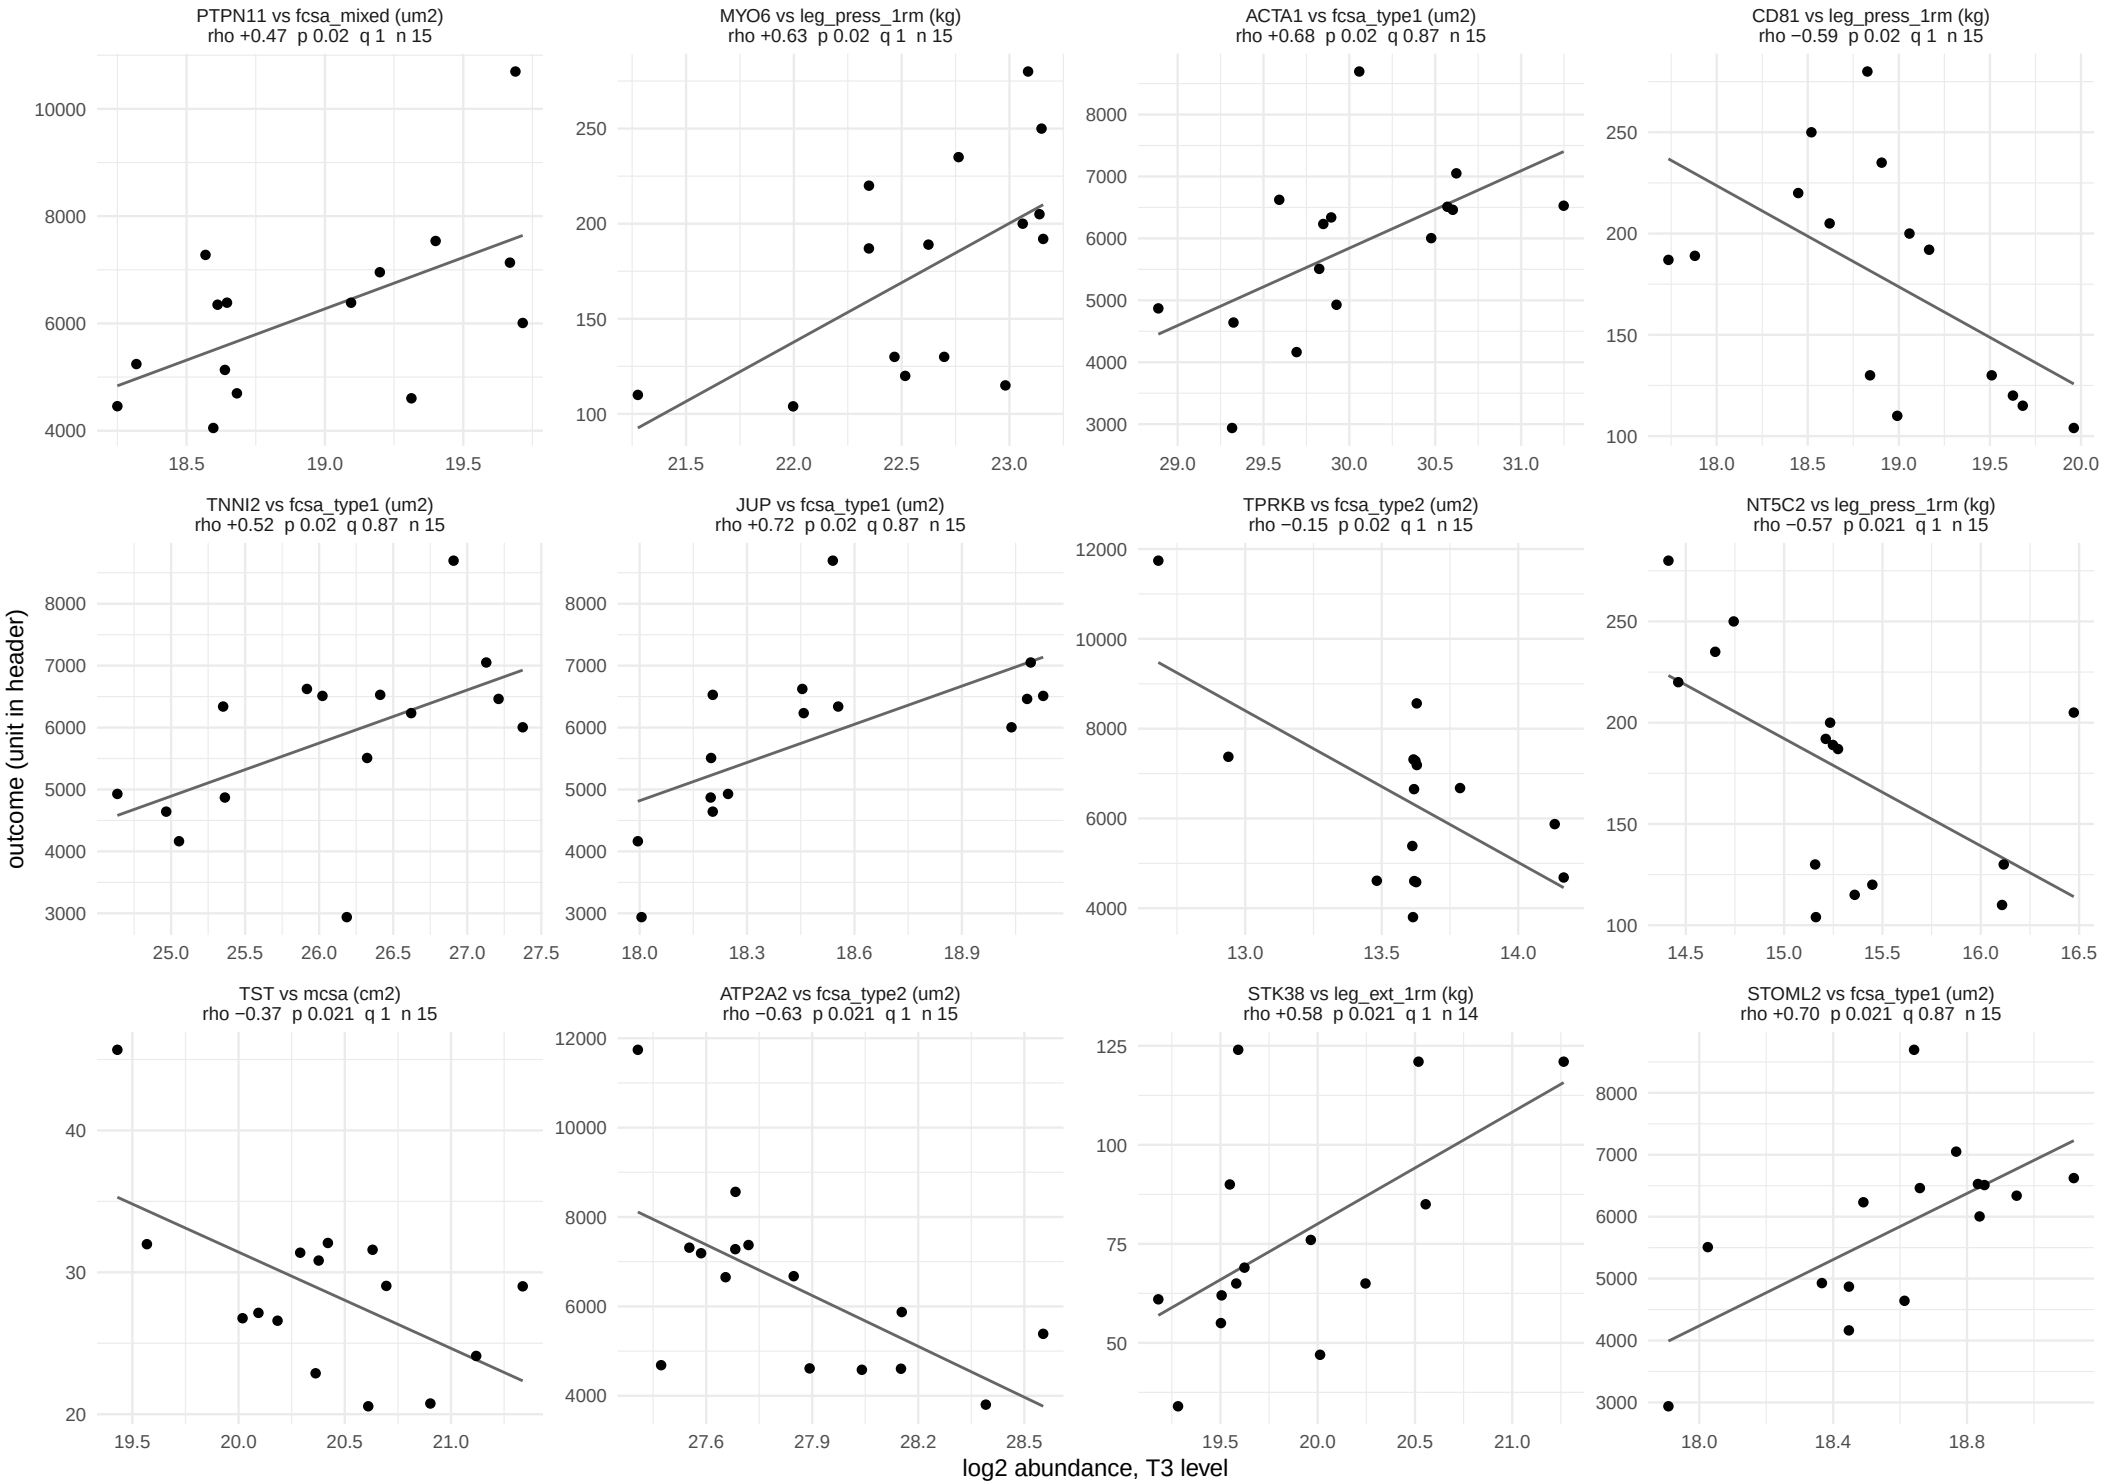

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, post_bout_level window


372 of 11400 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 12 of 31.

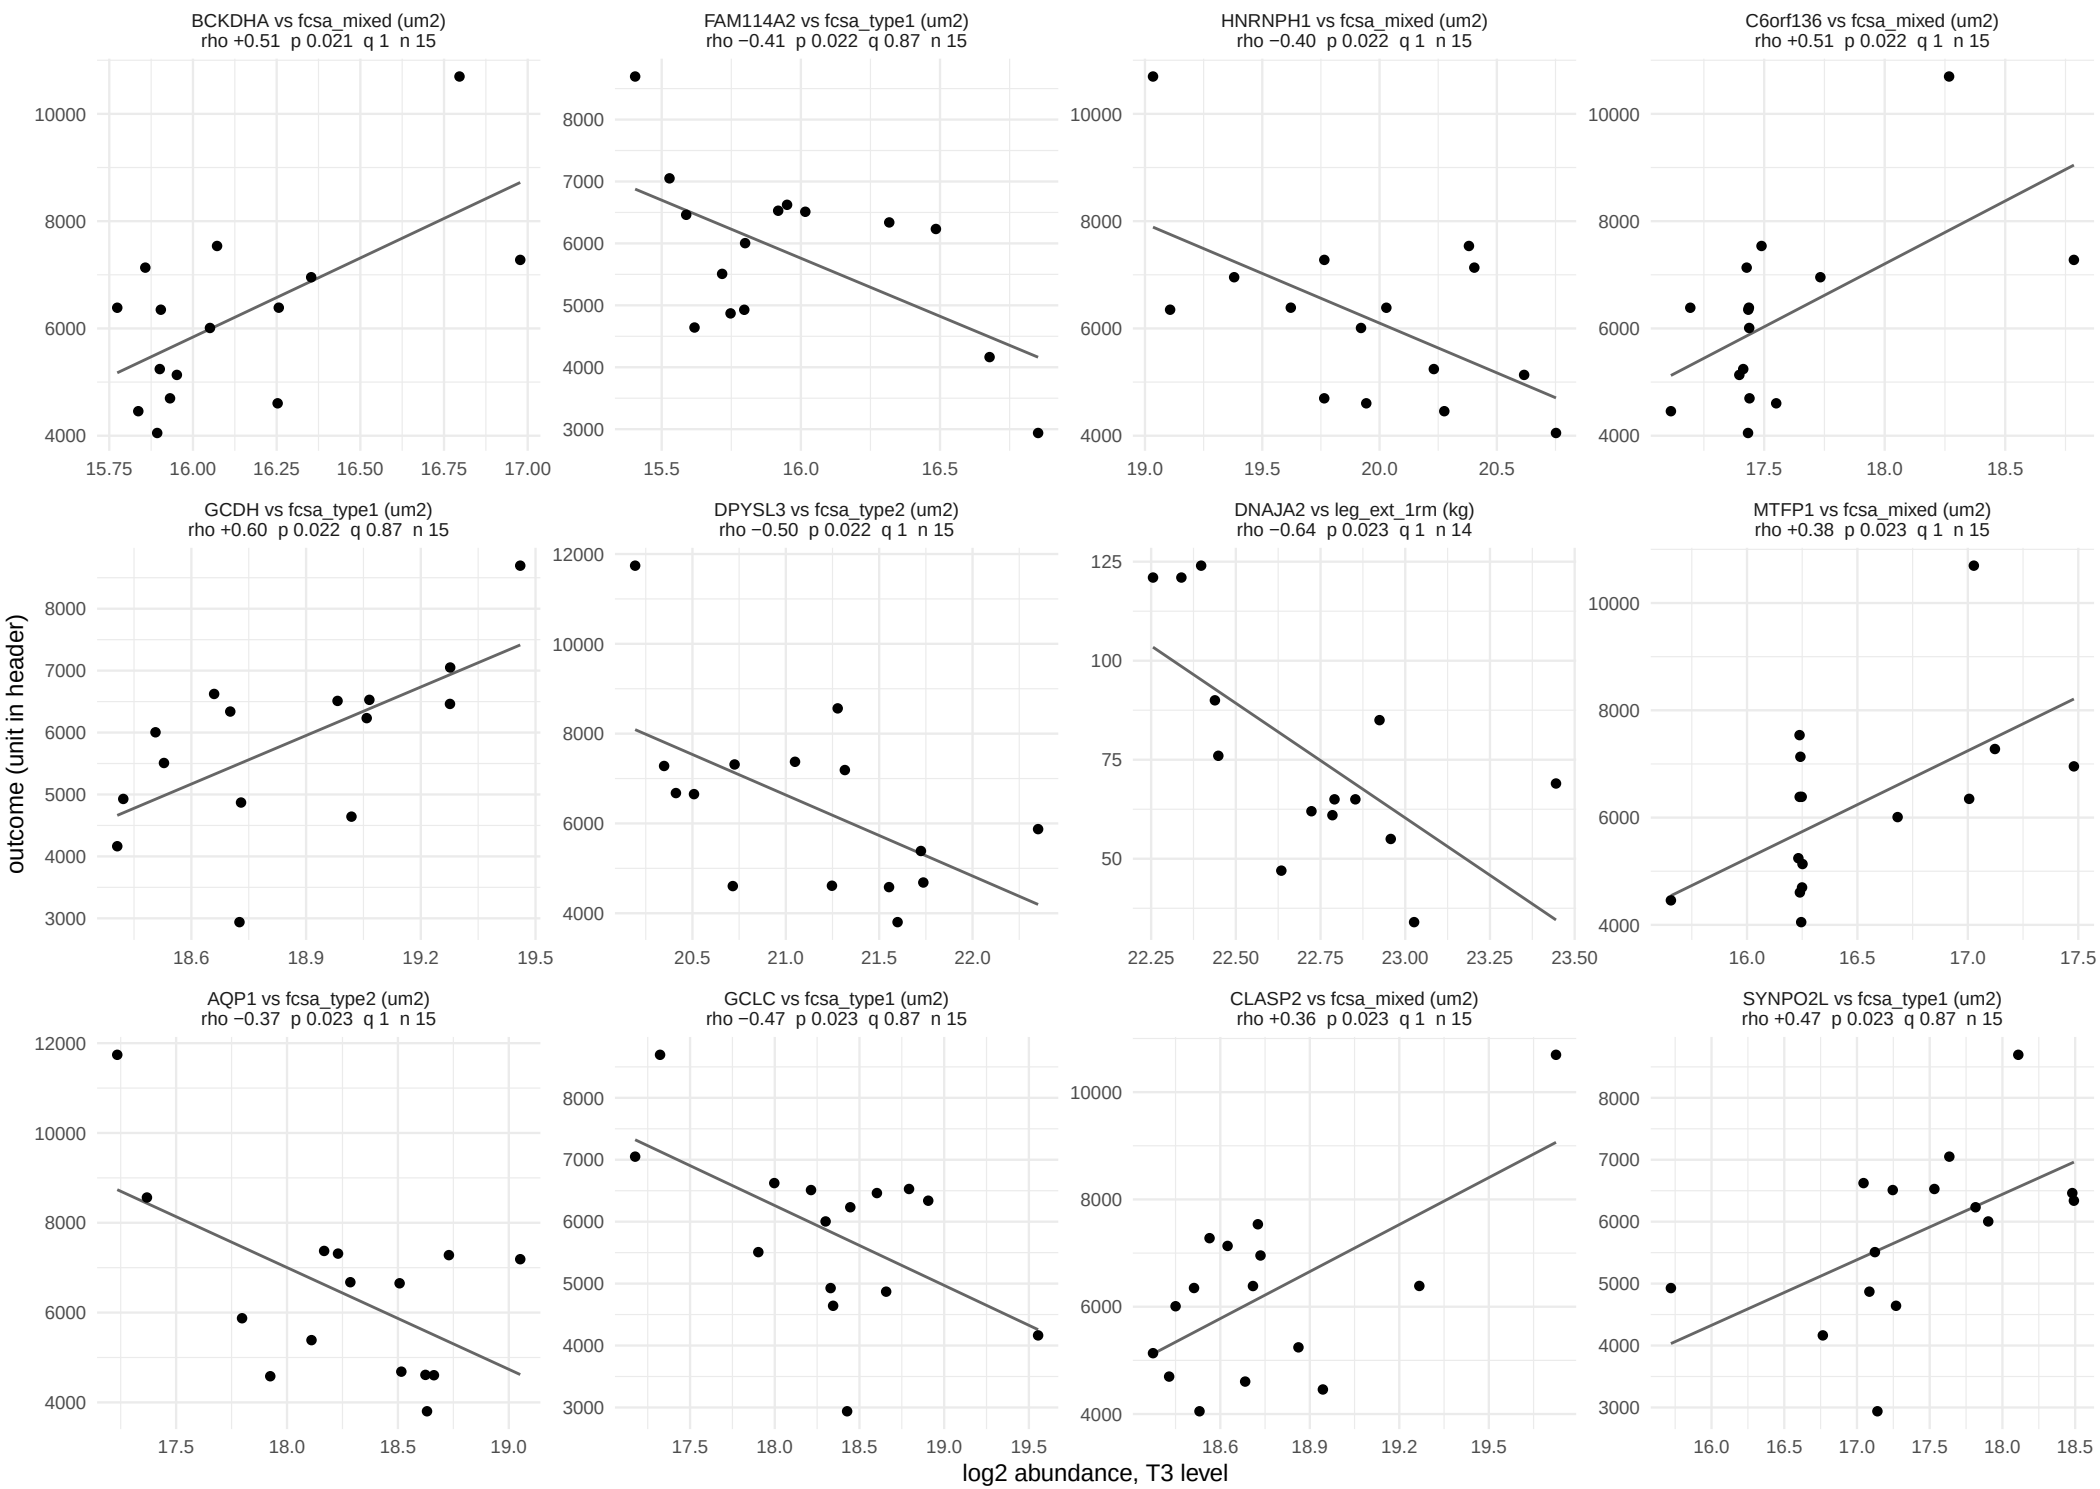

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, post_bout_level window


372 of 11400 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 13 of 31.

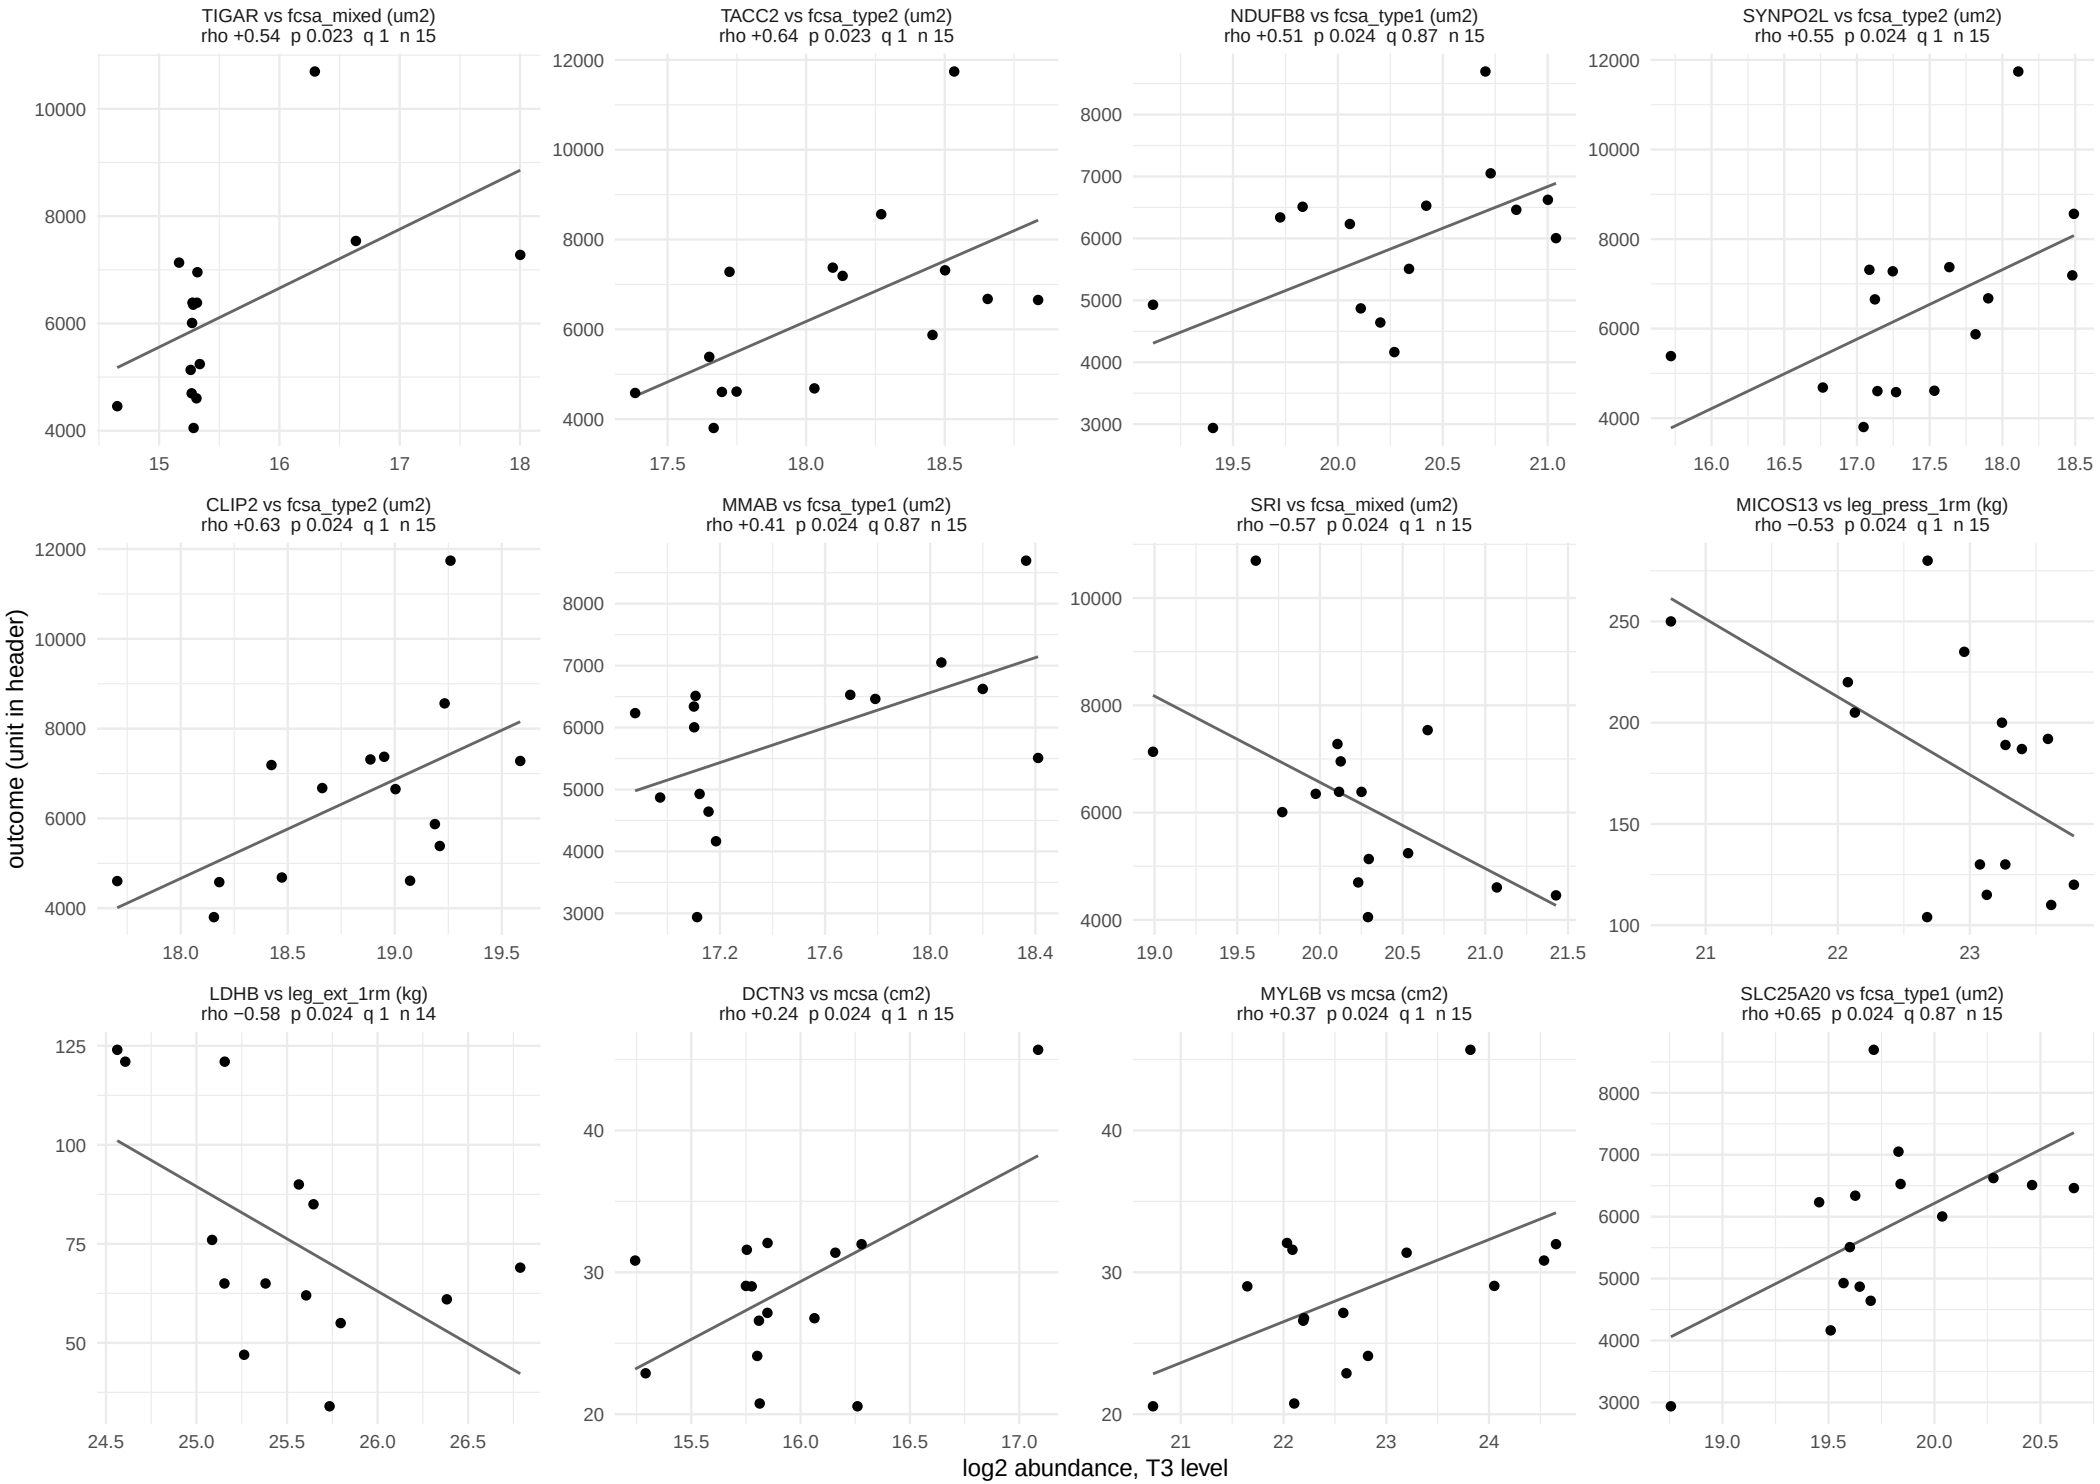

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, post_bout_level window


372 of 11400 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 14 of 31.

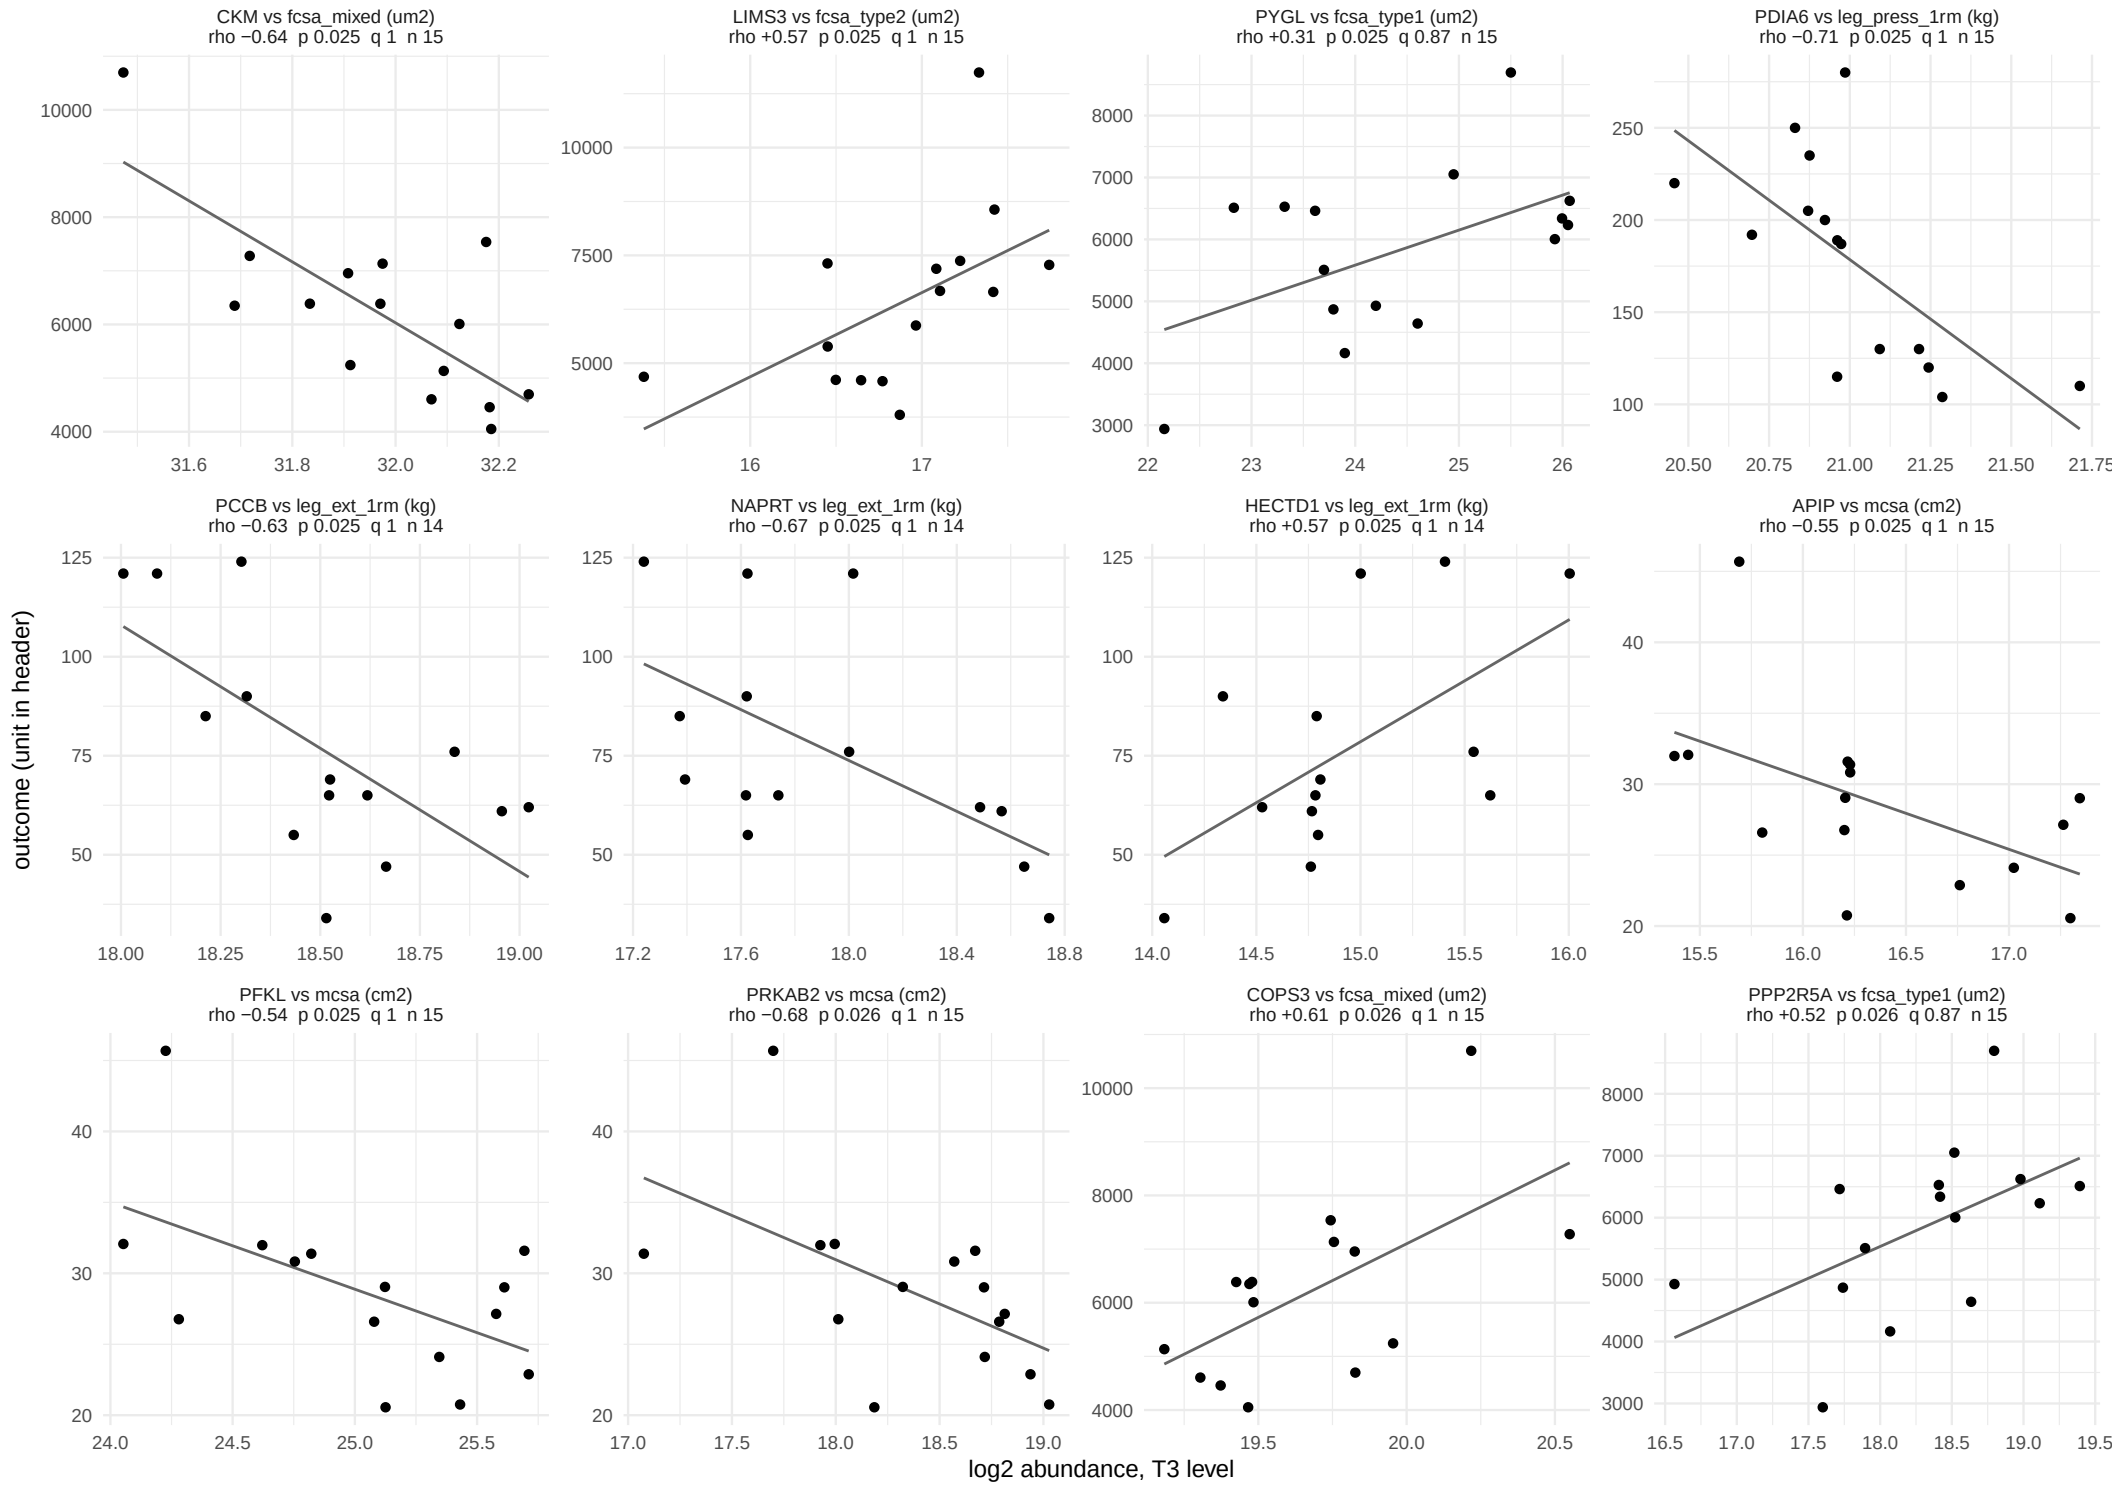

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, post_bout_level window


372 of 11400 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 15 of 31.

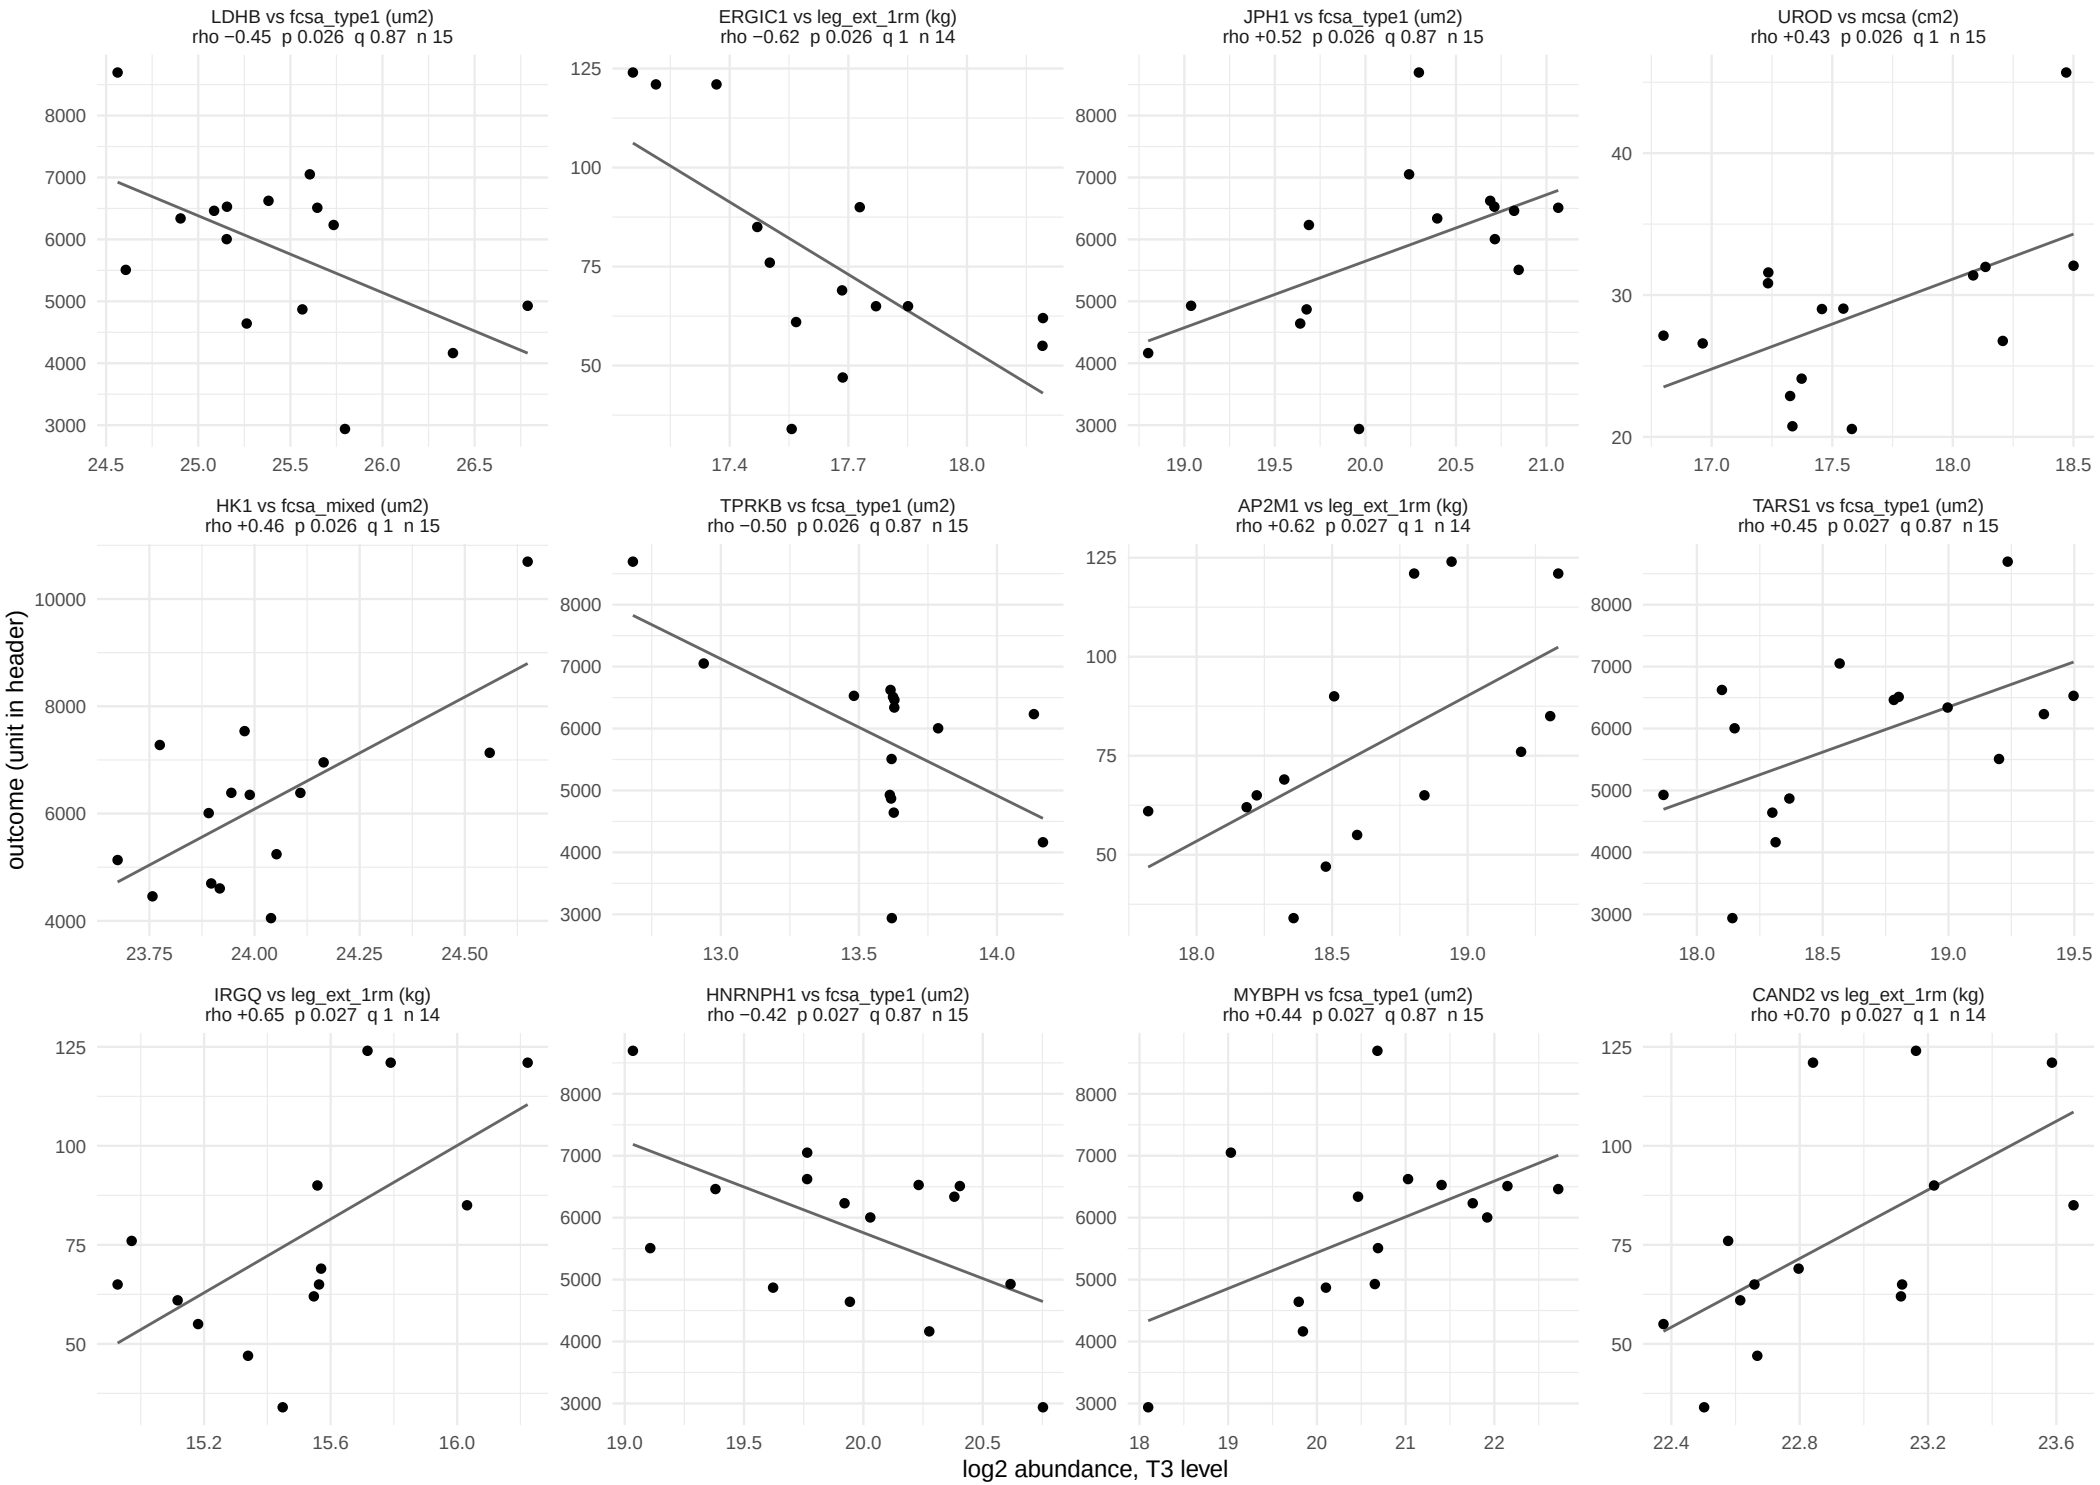

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, post_bout_level window


372 of 11400 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 16 of 31.

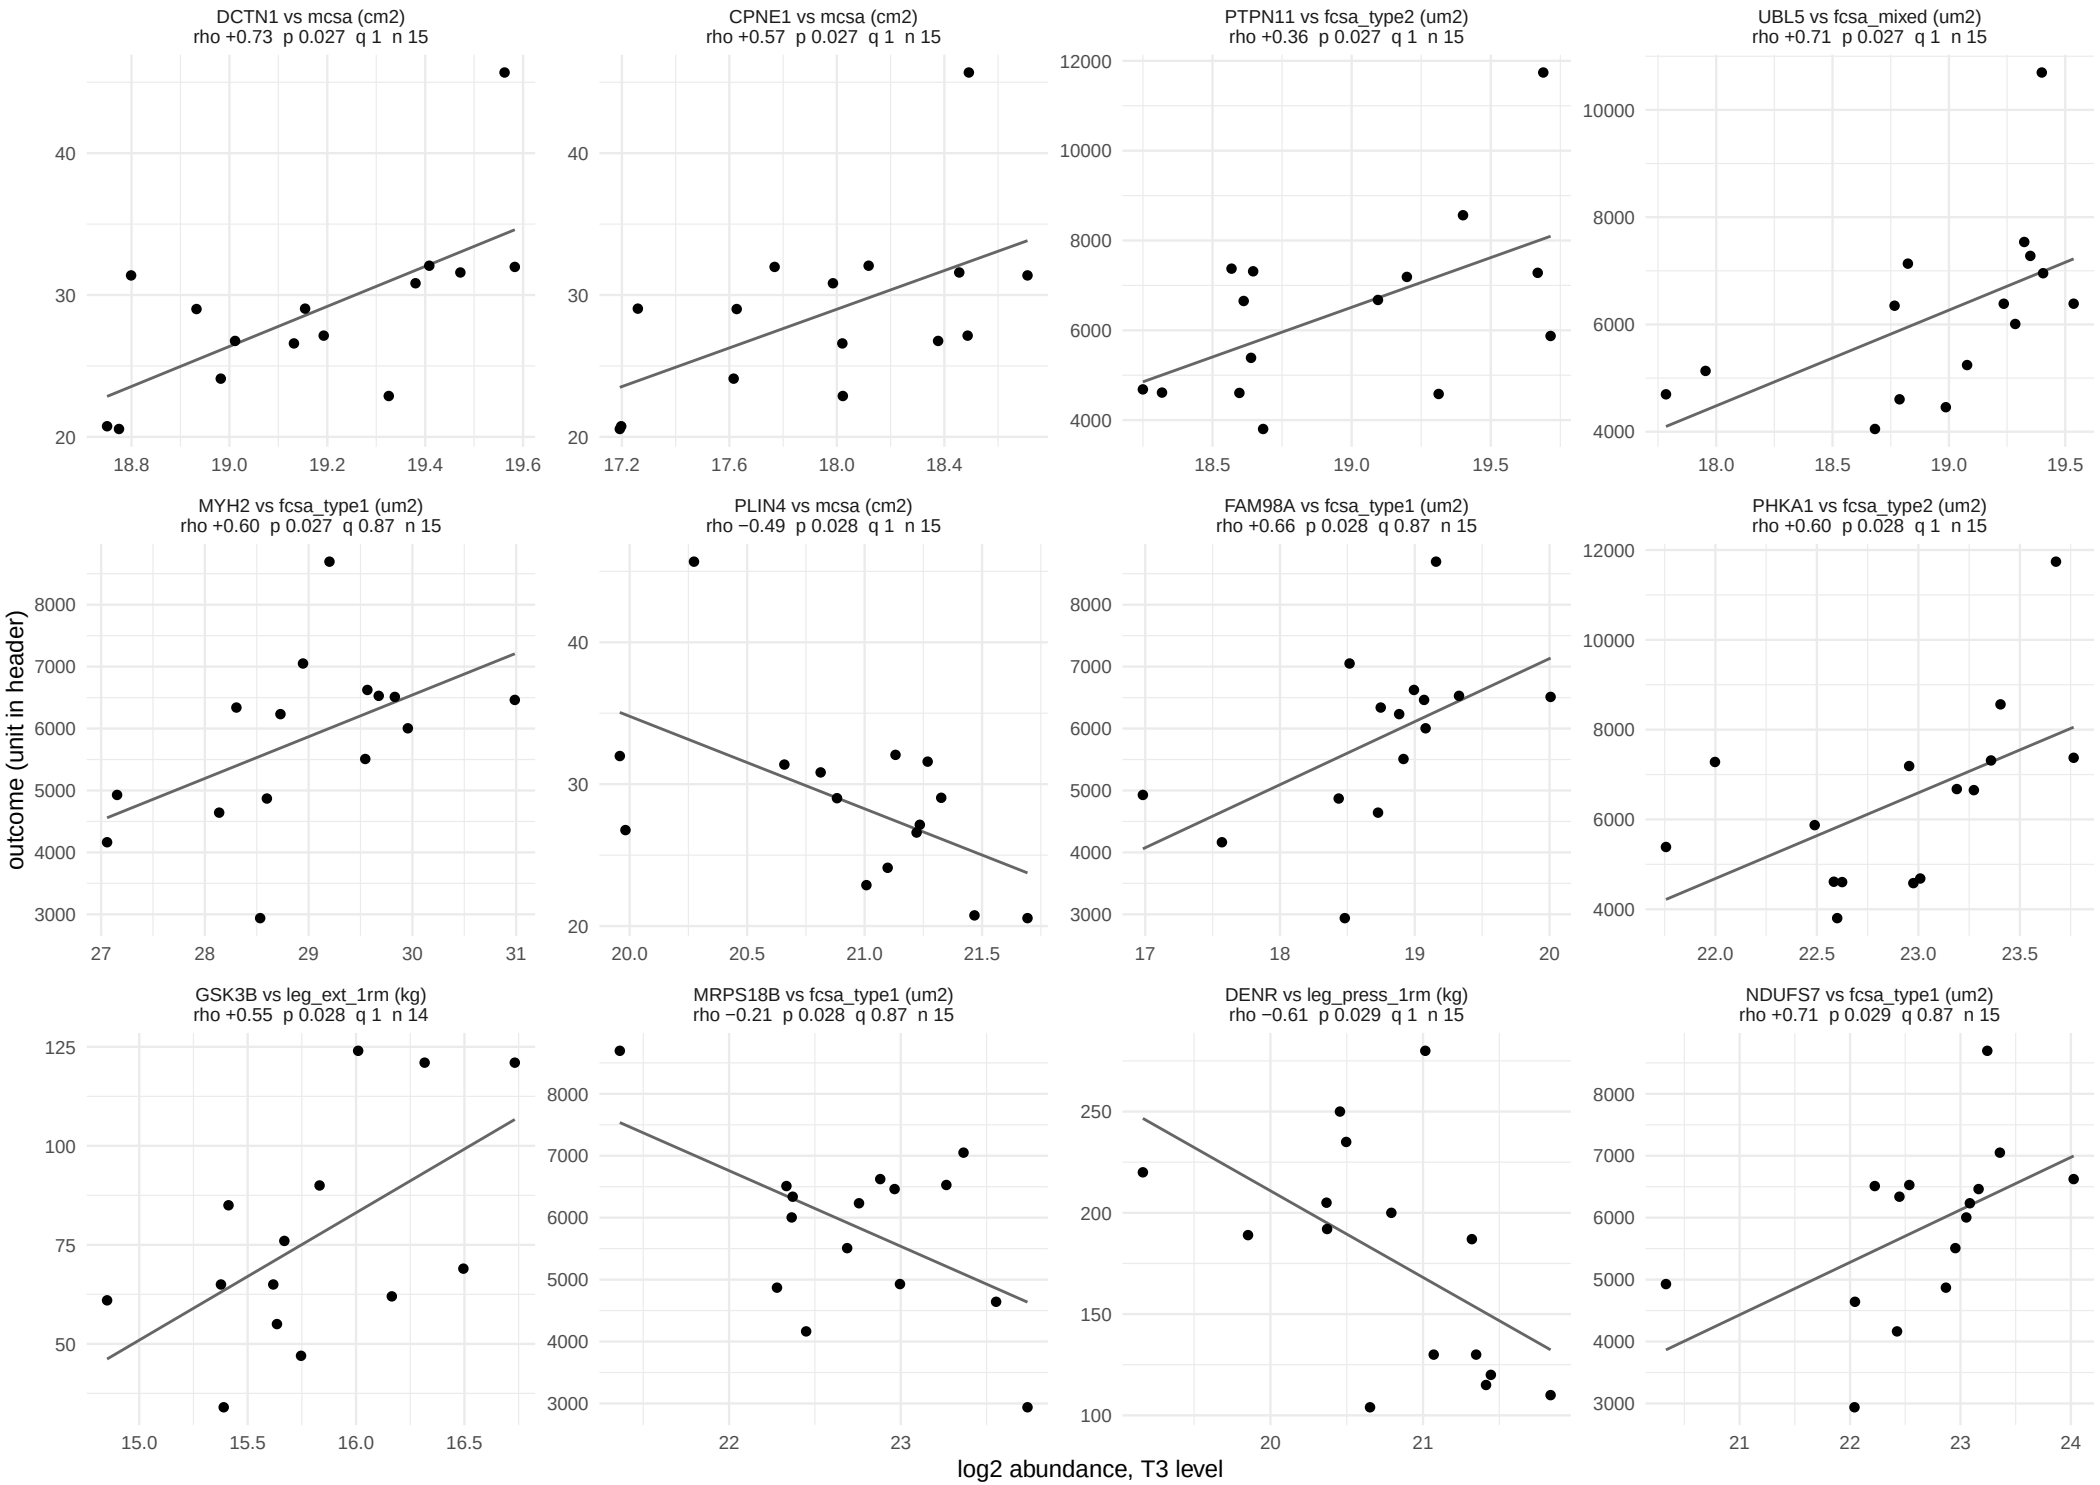

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, post_bout_level window


372 of 11400 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 17 of 31.

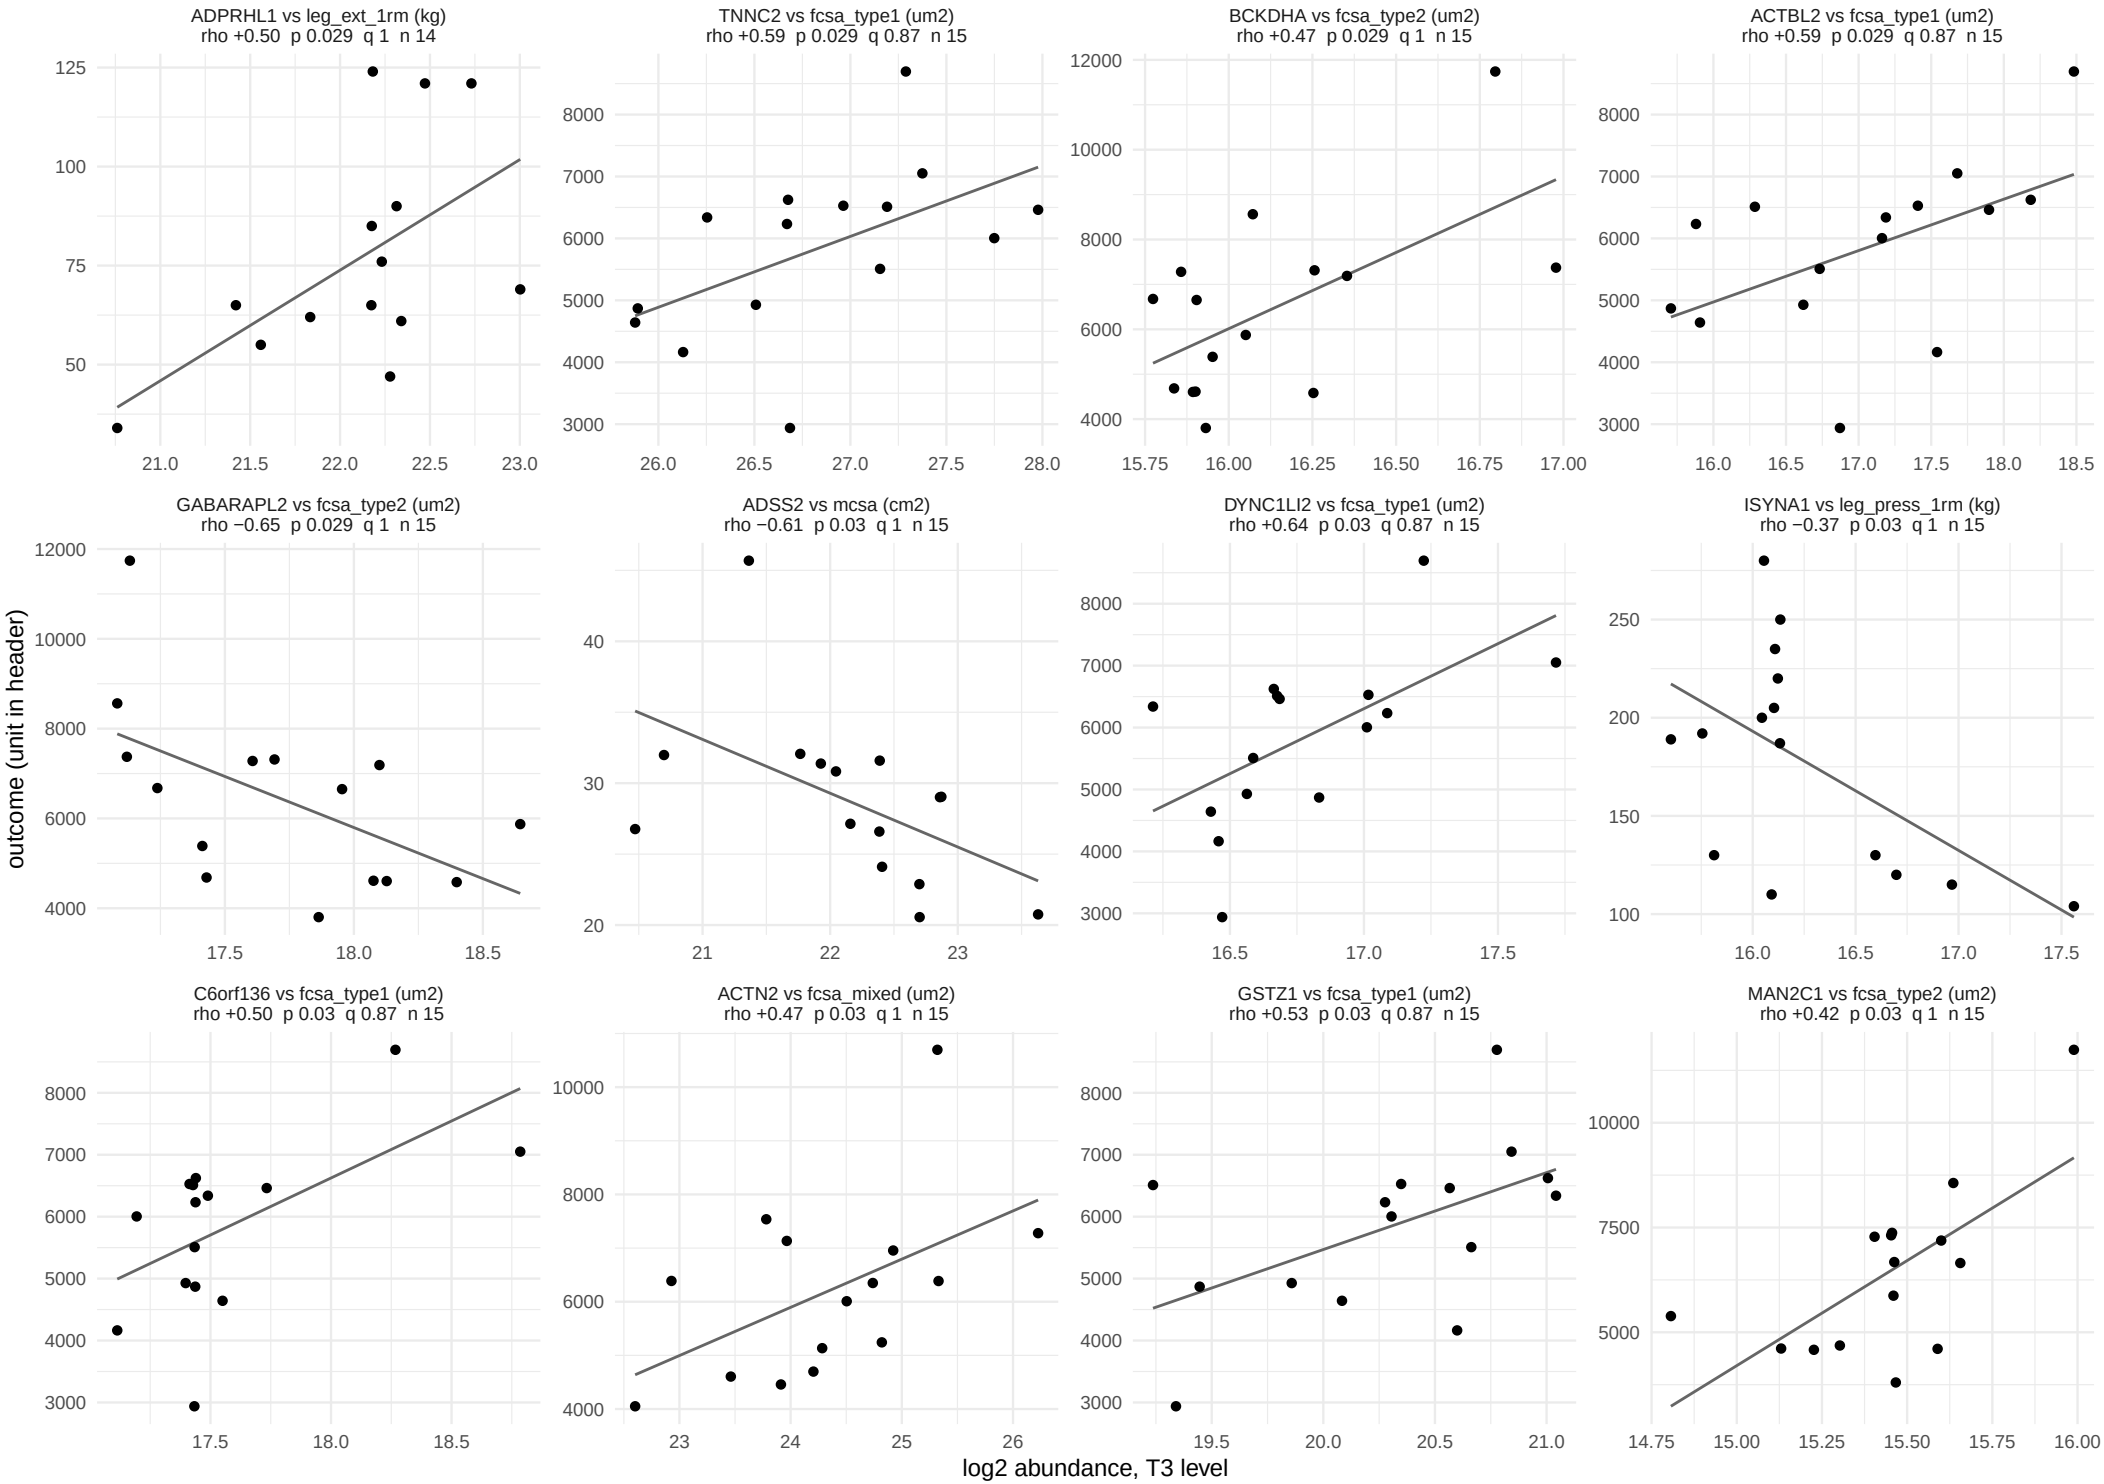

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, post_bout_level window


372 of 11400 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 18 of 31.

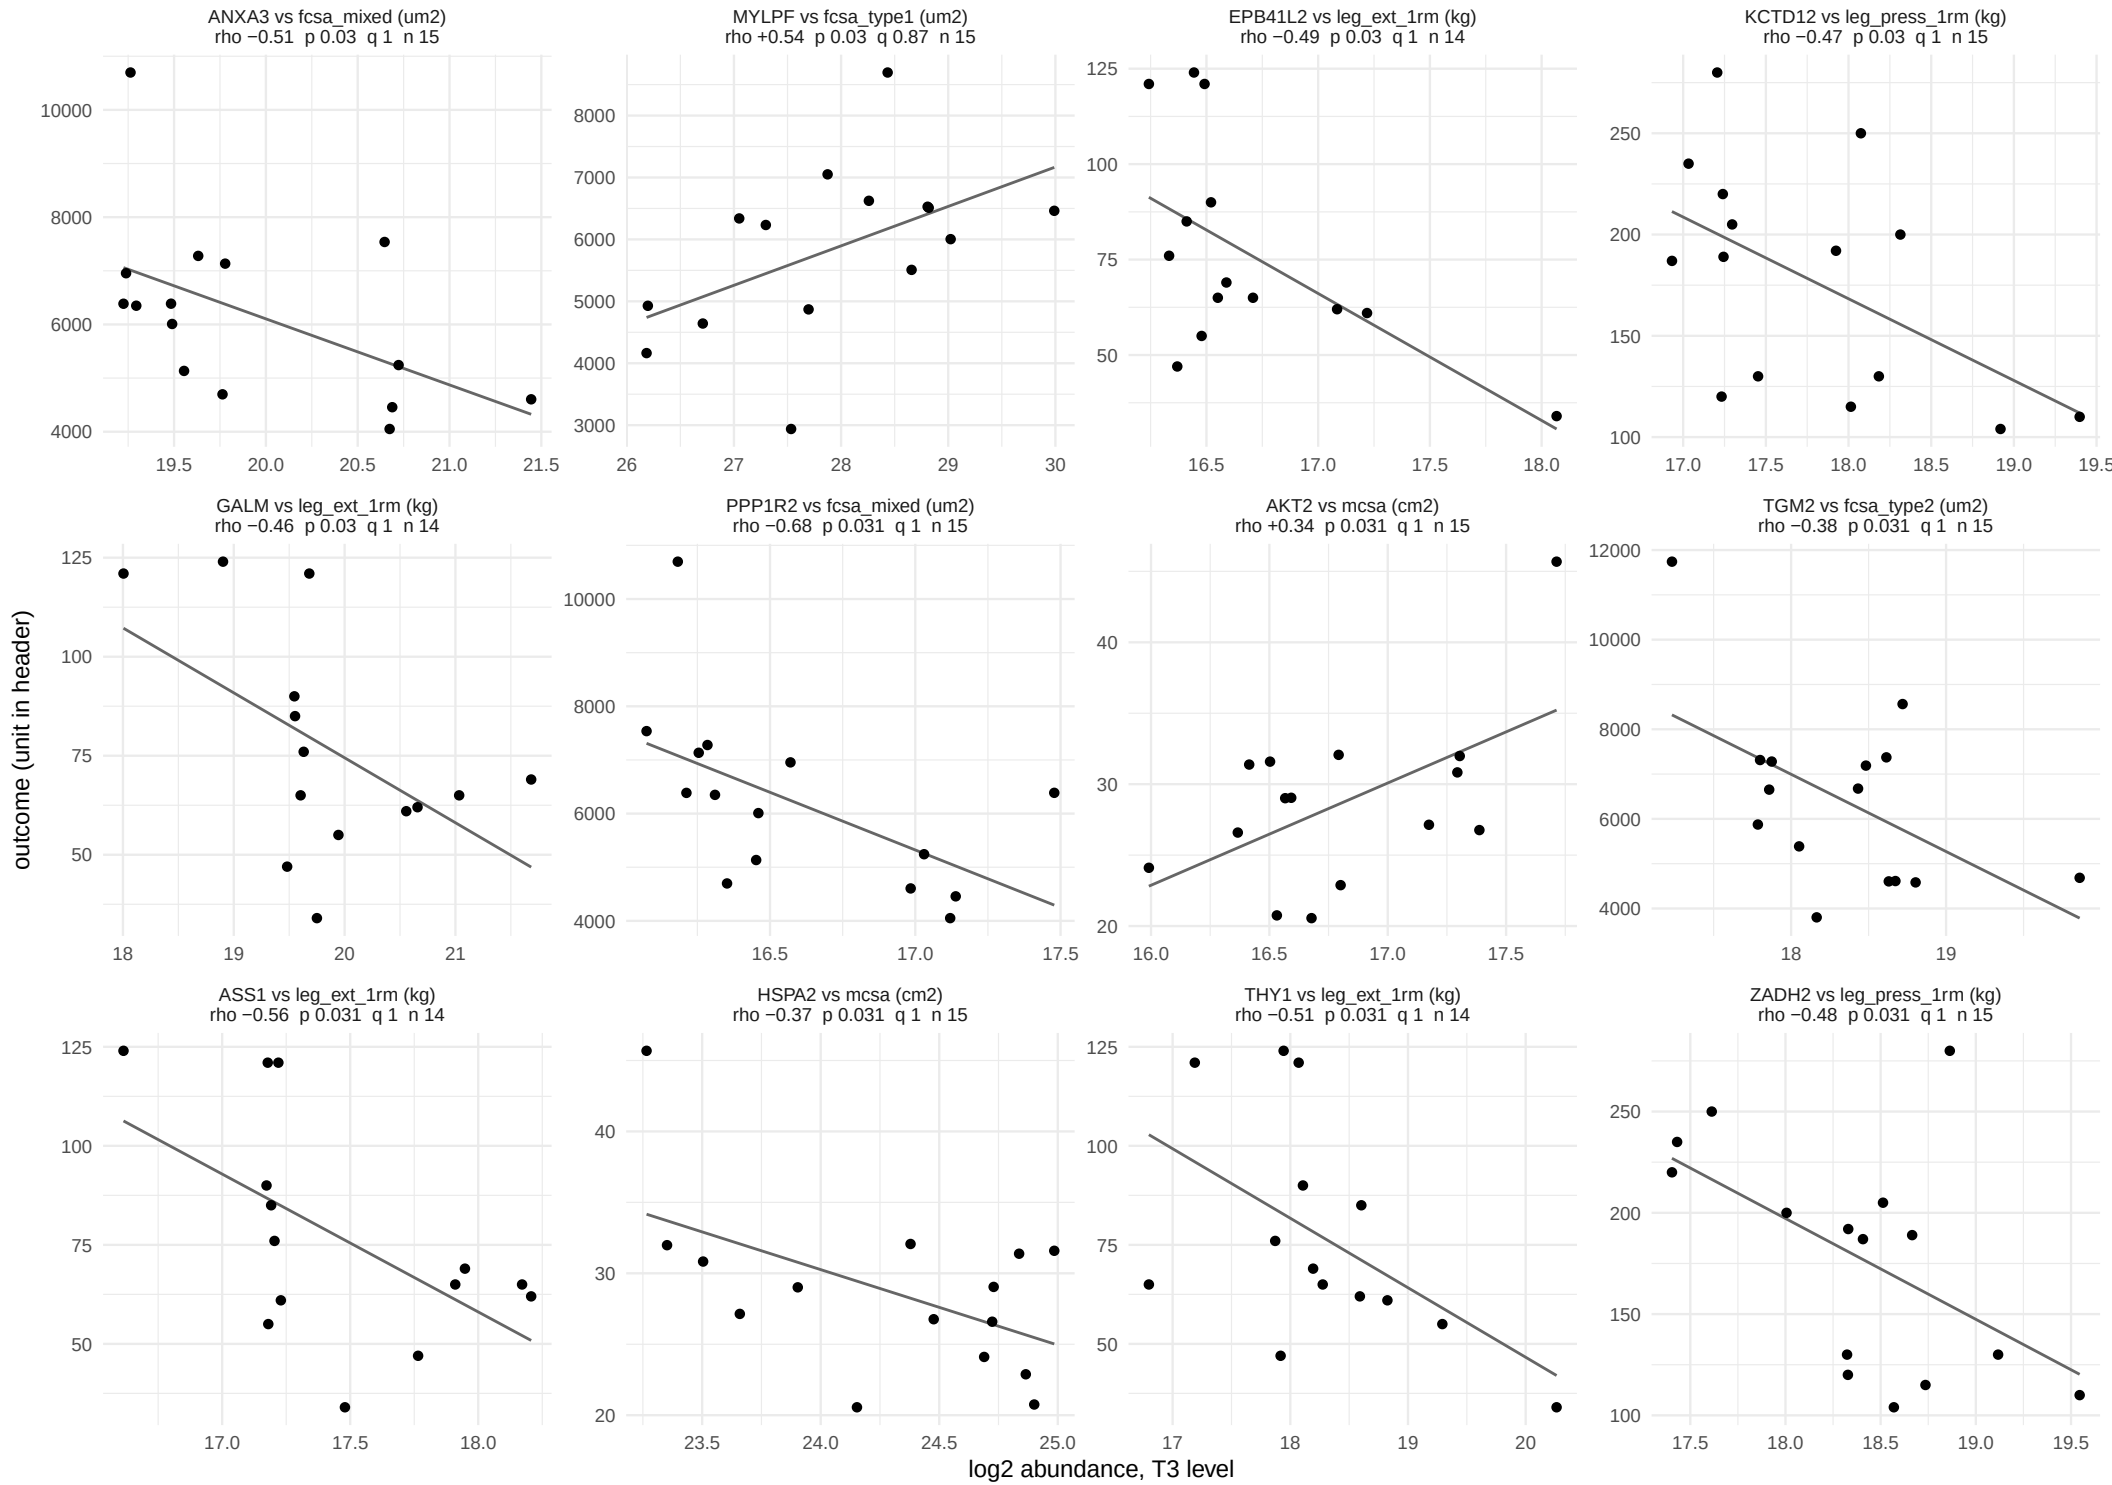

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, post_bout_level window


372 of 11400 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 19 of 31.

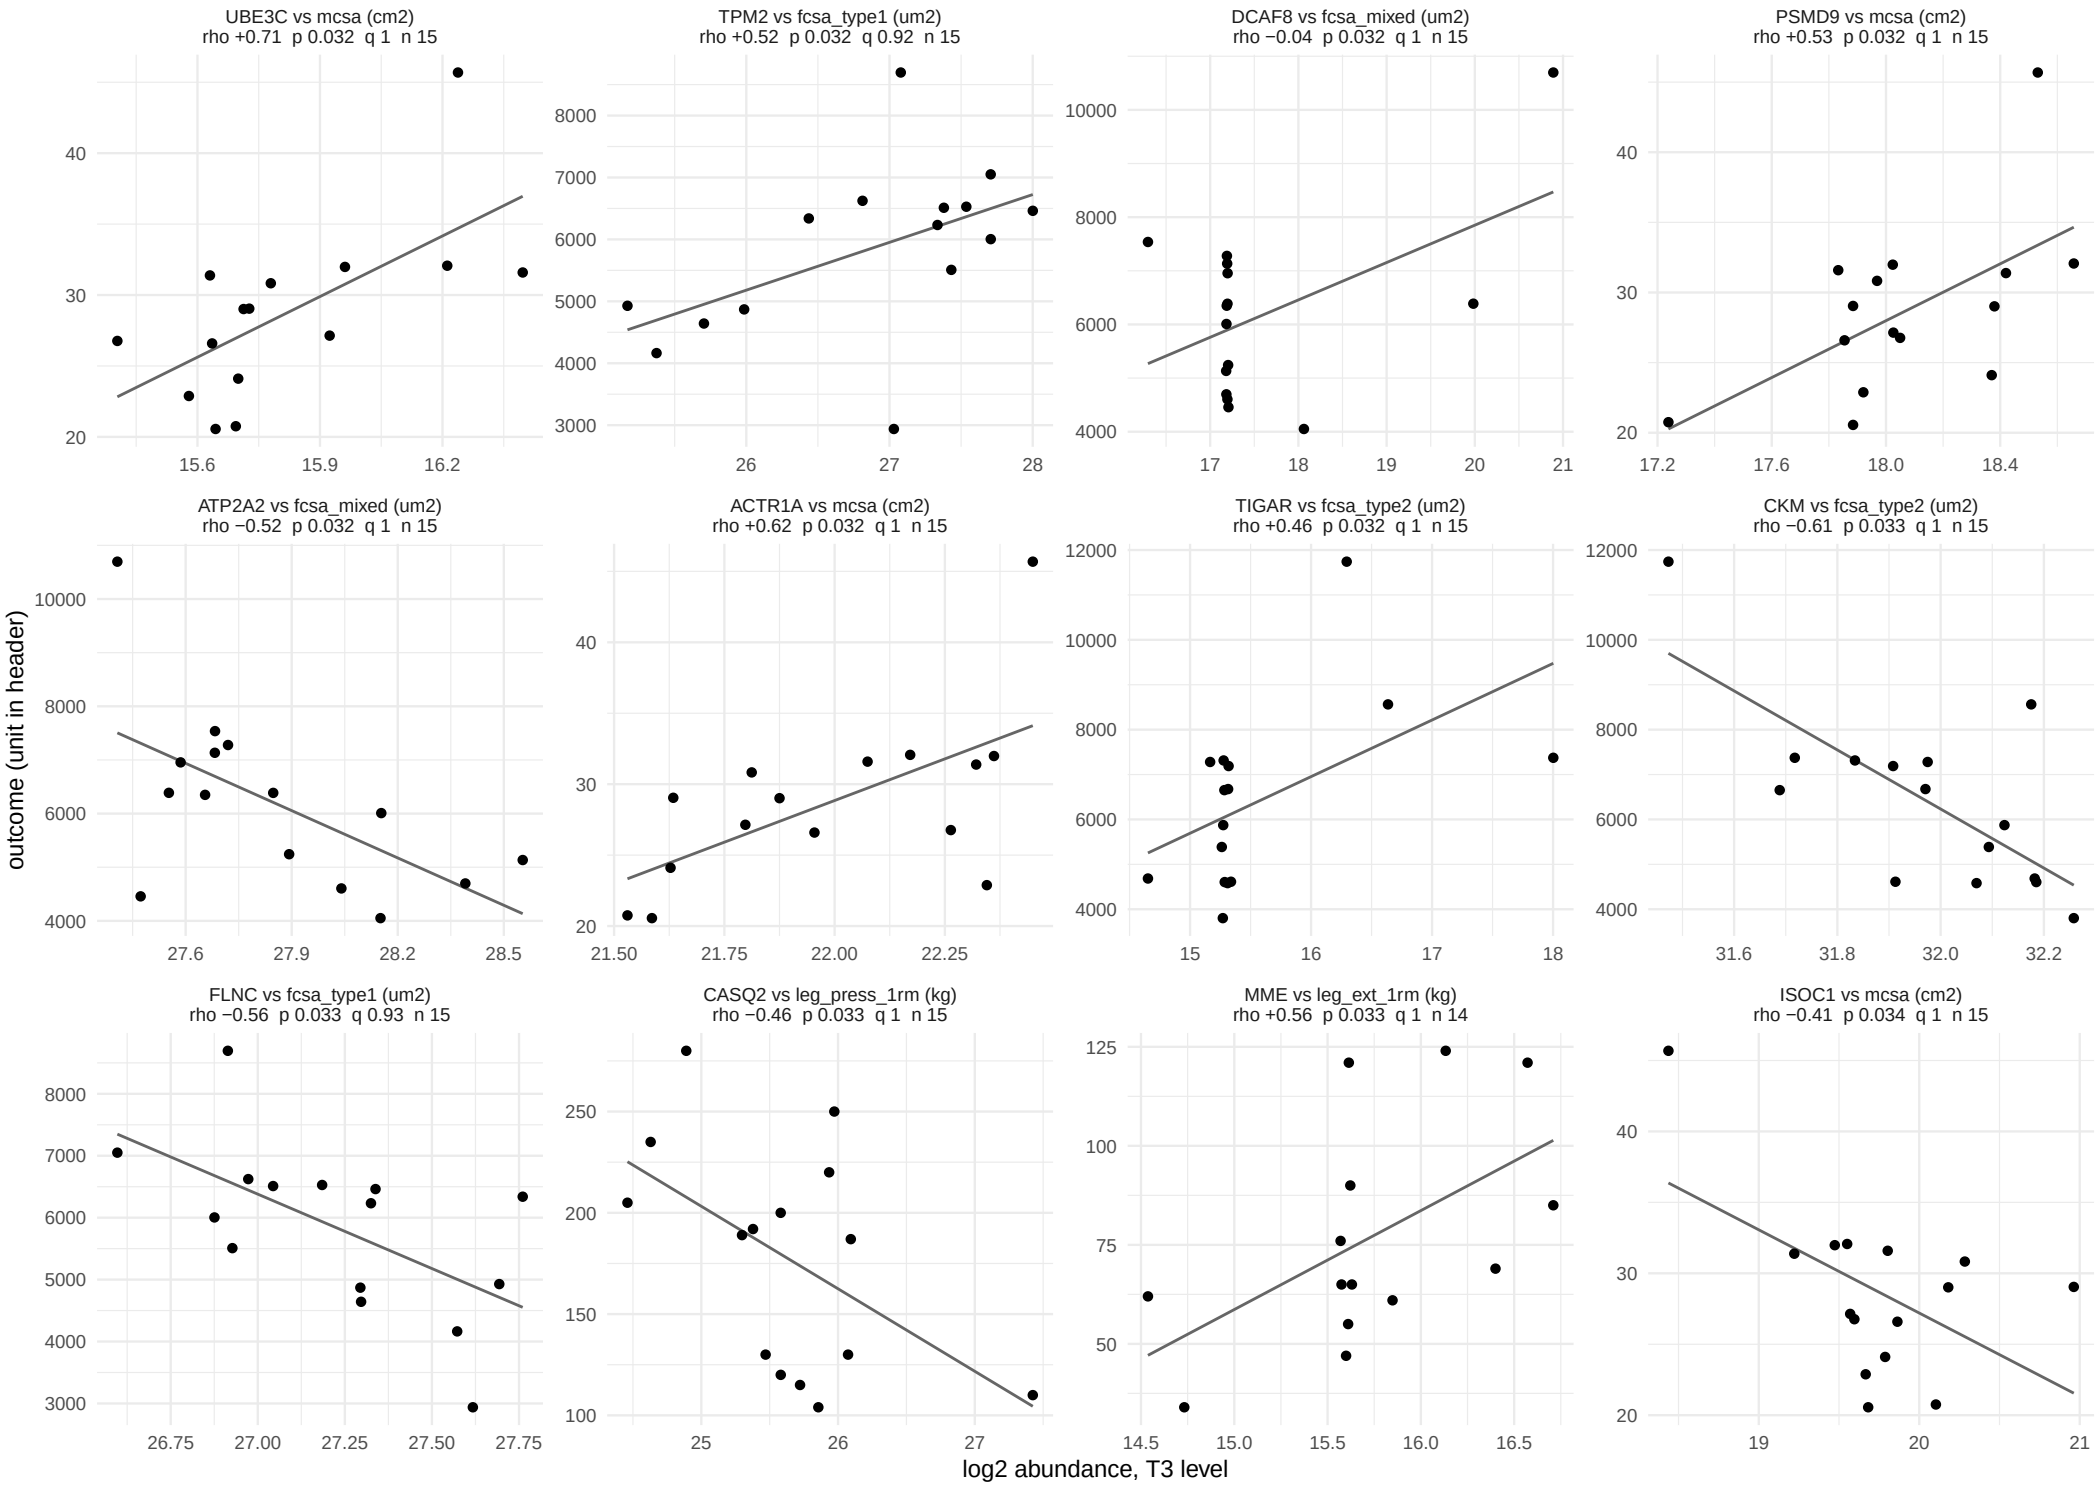

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, post_bout_level window


372 of 11400 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 20 of 31.

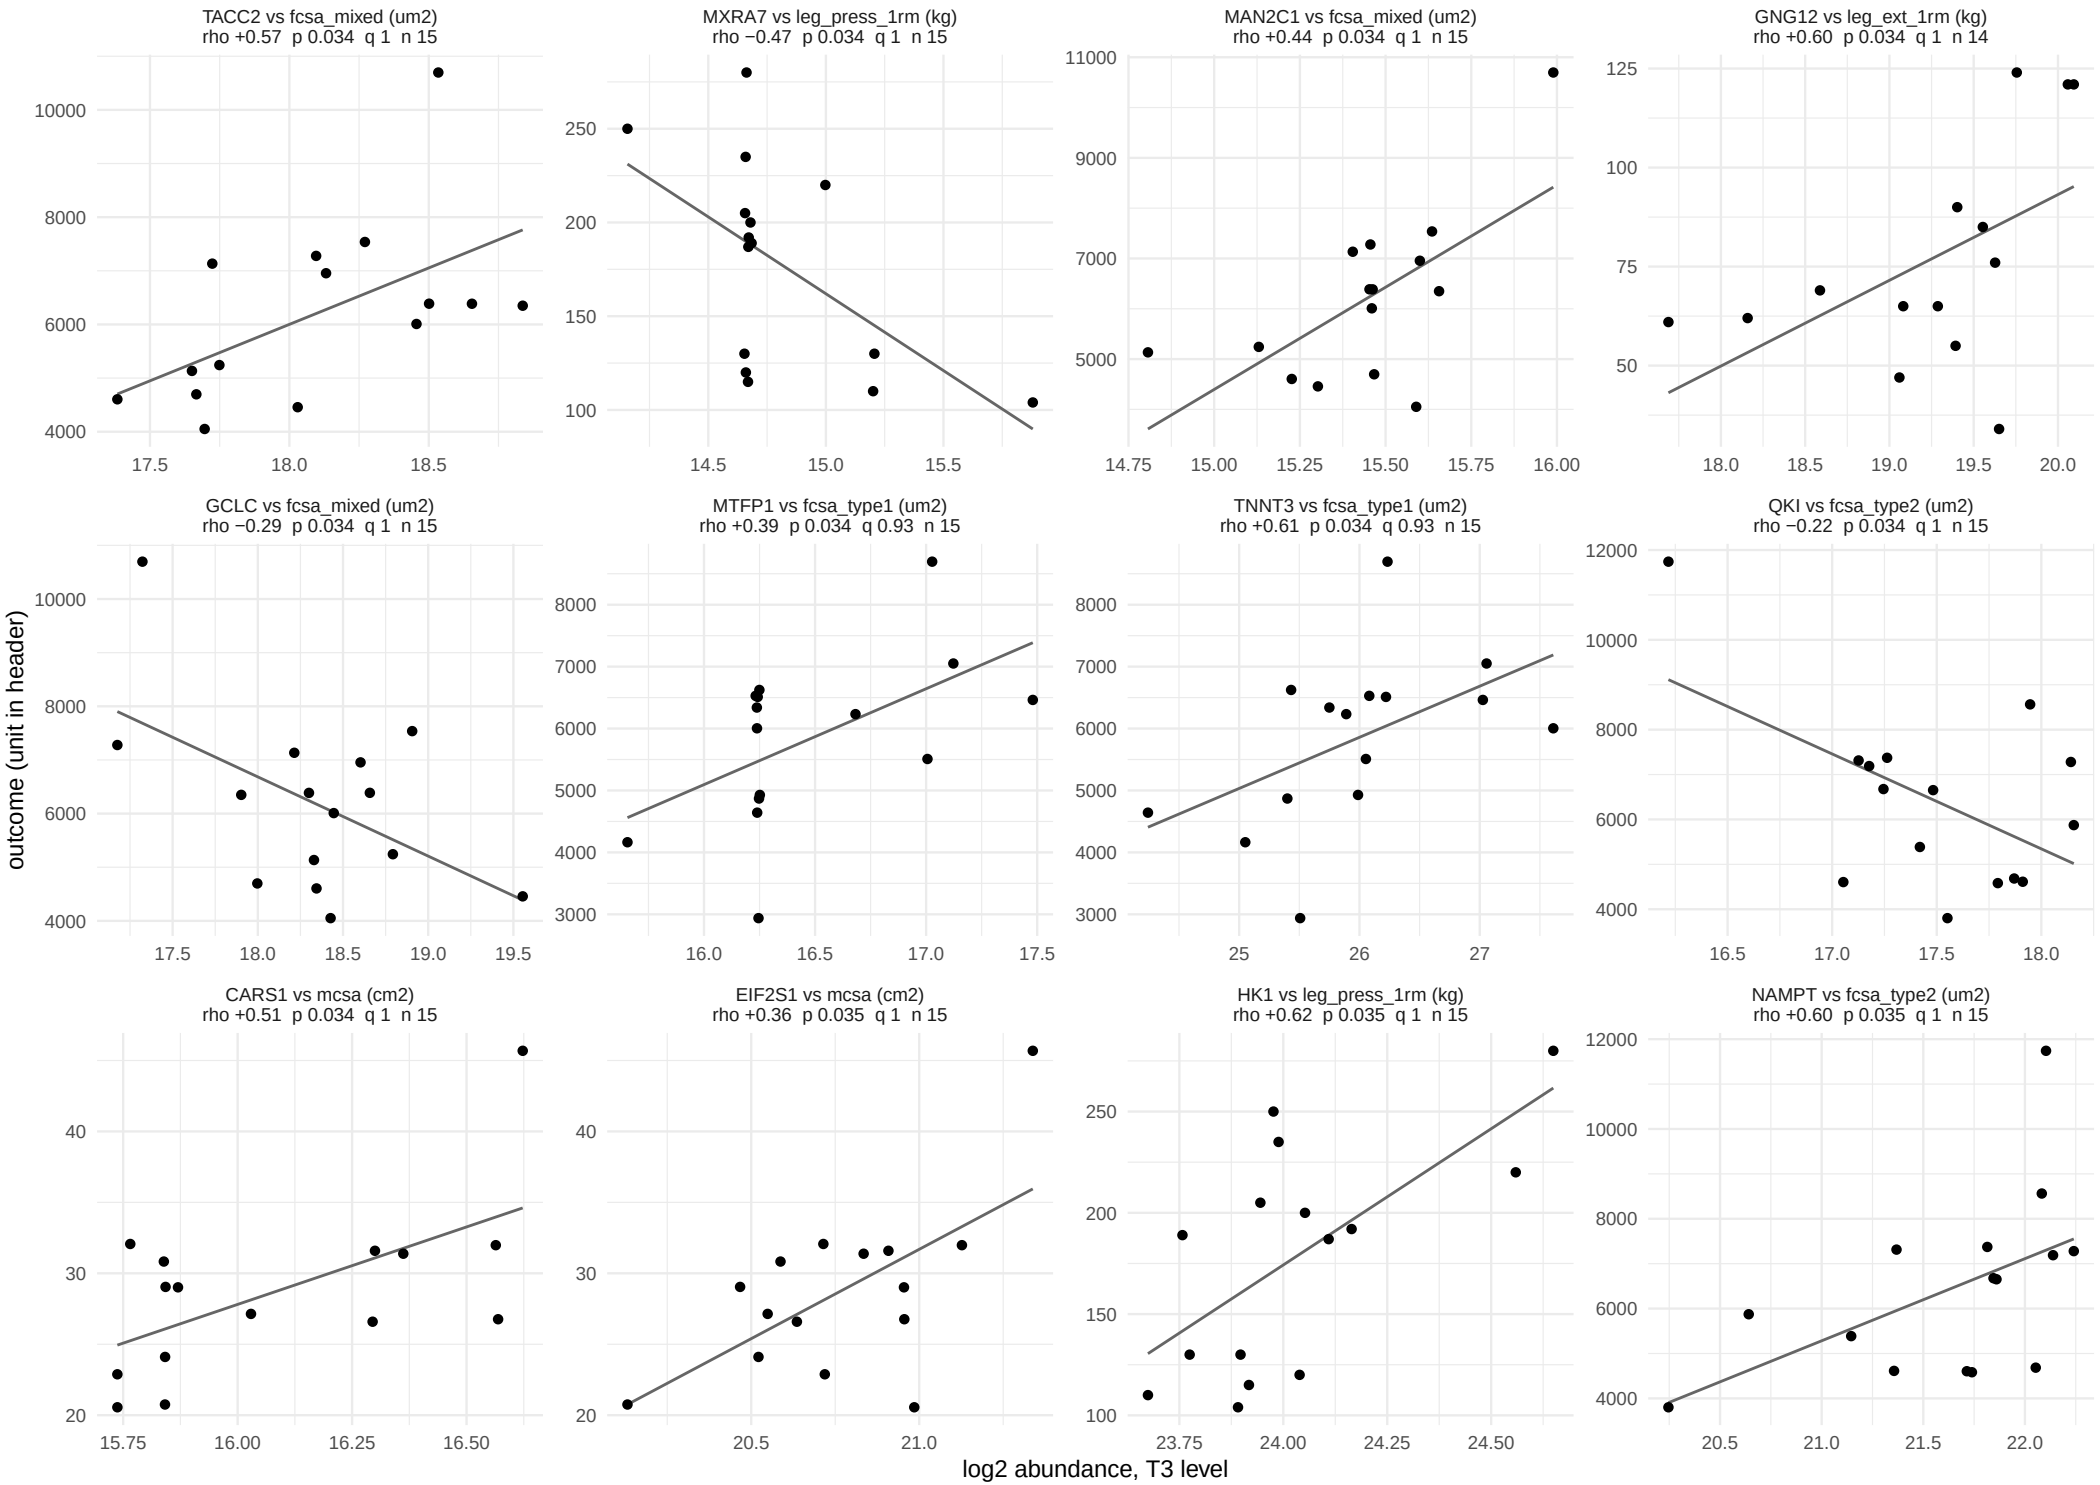

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, post_bout_level window


372 of 11400 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 21 of 31.

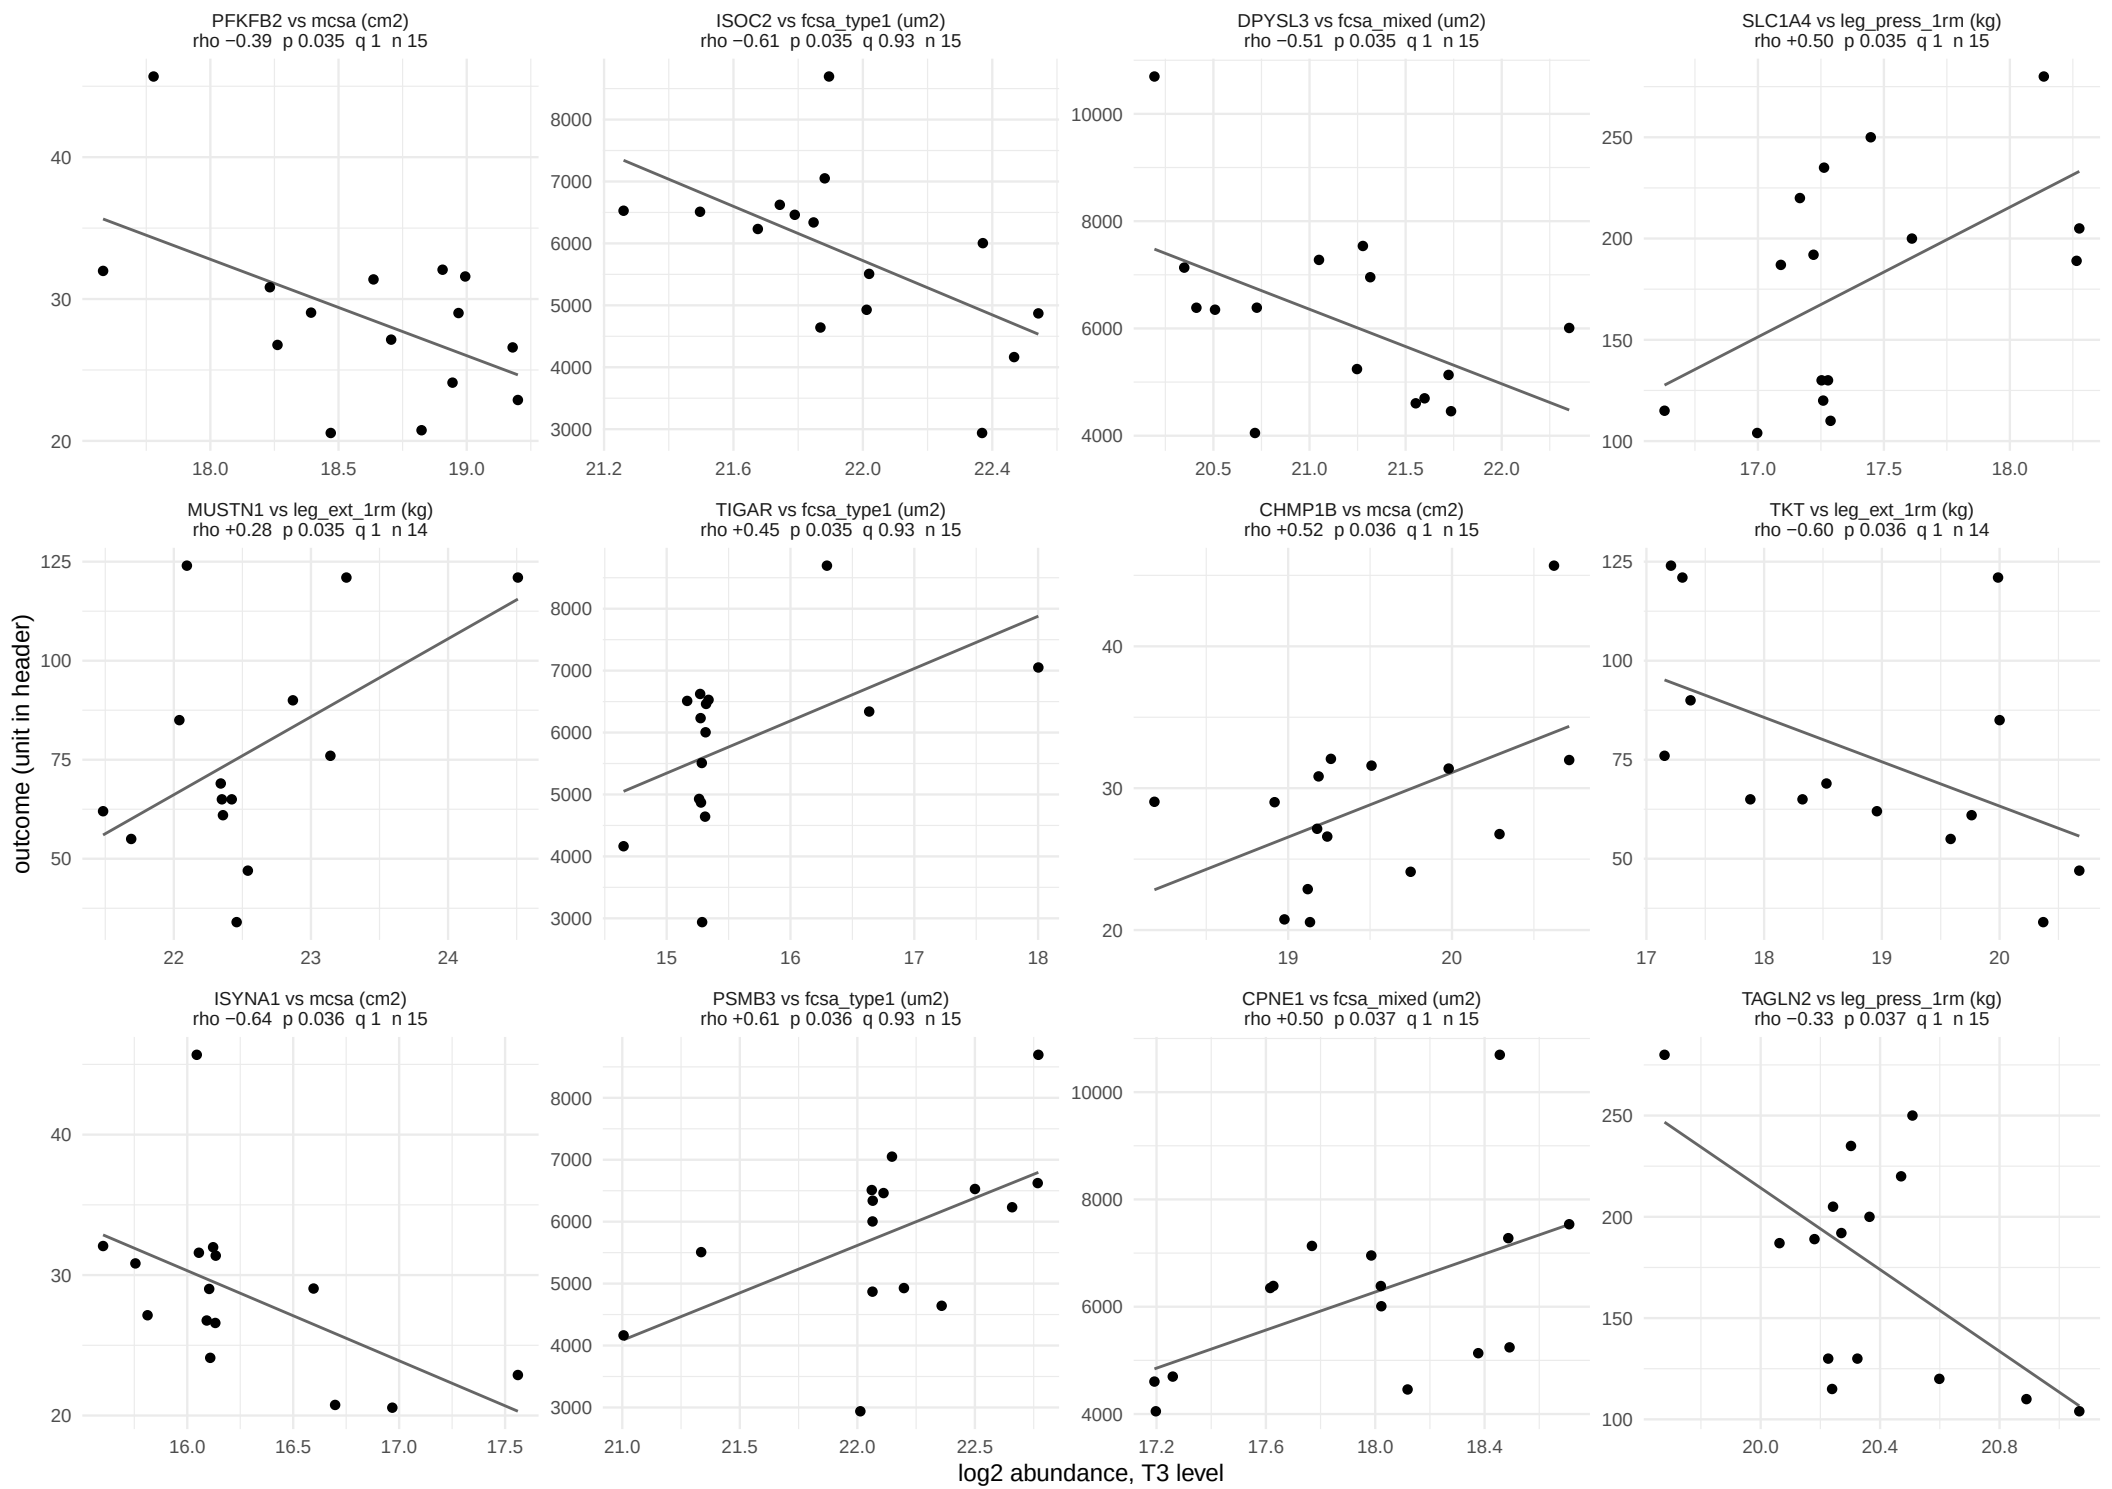

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, post_bout_level window


372 of 11400 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 22 of 31.

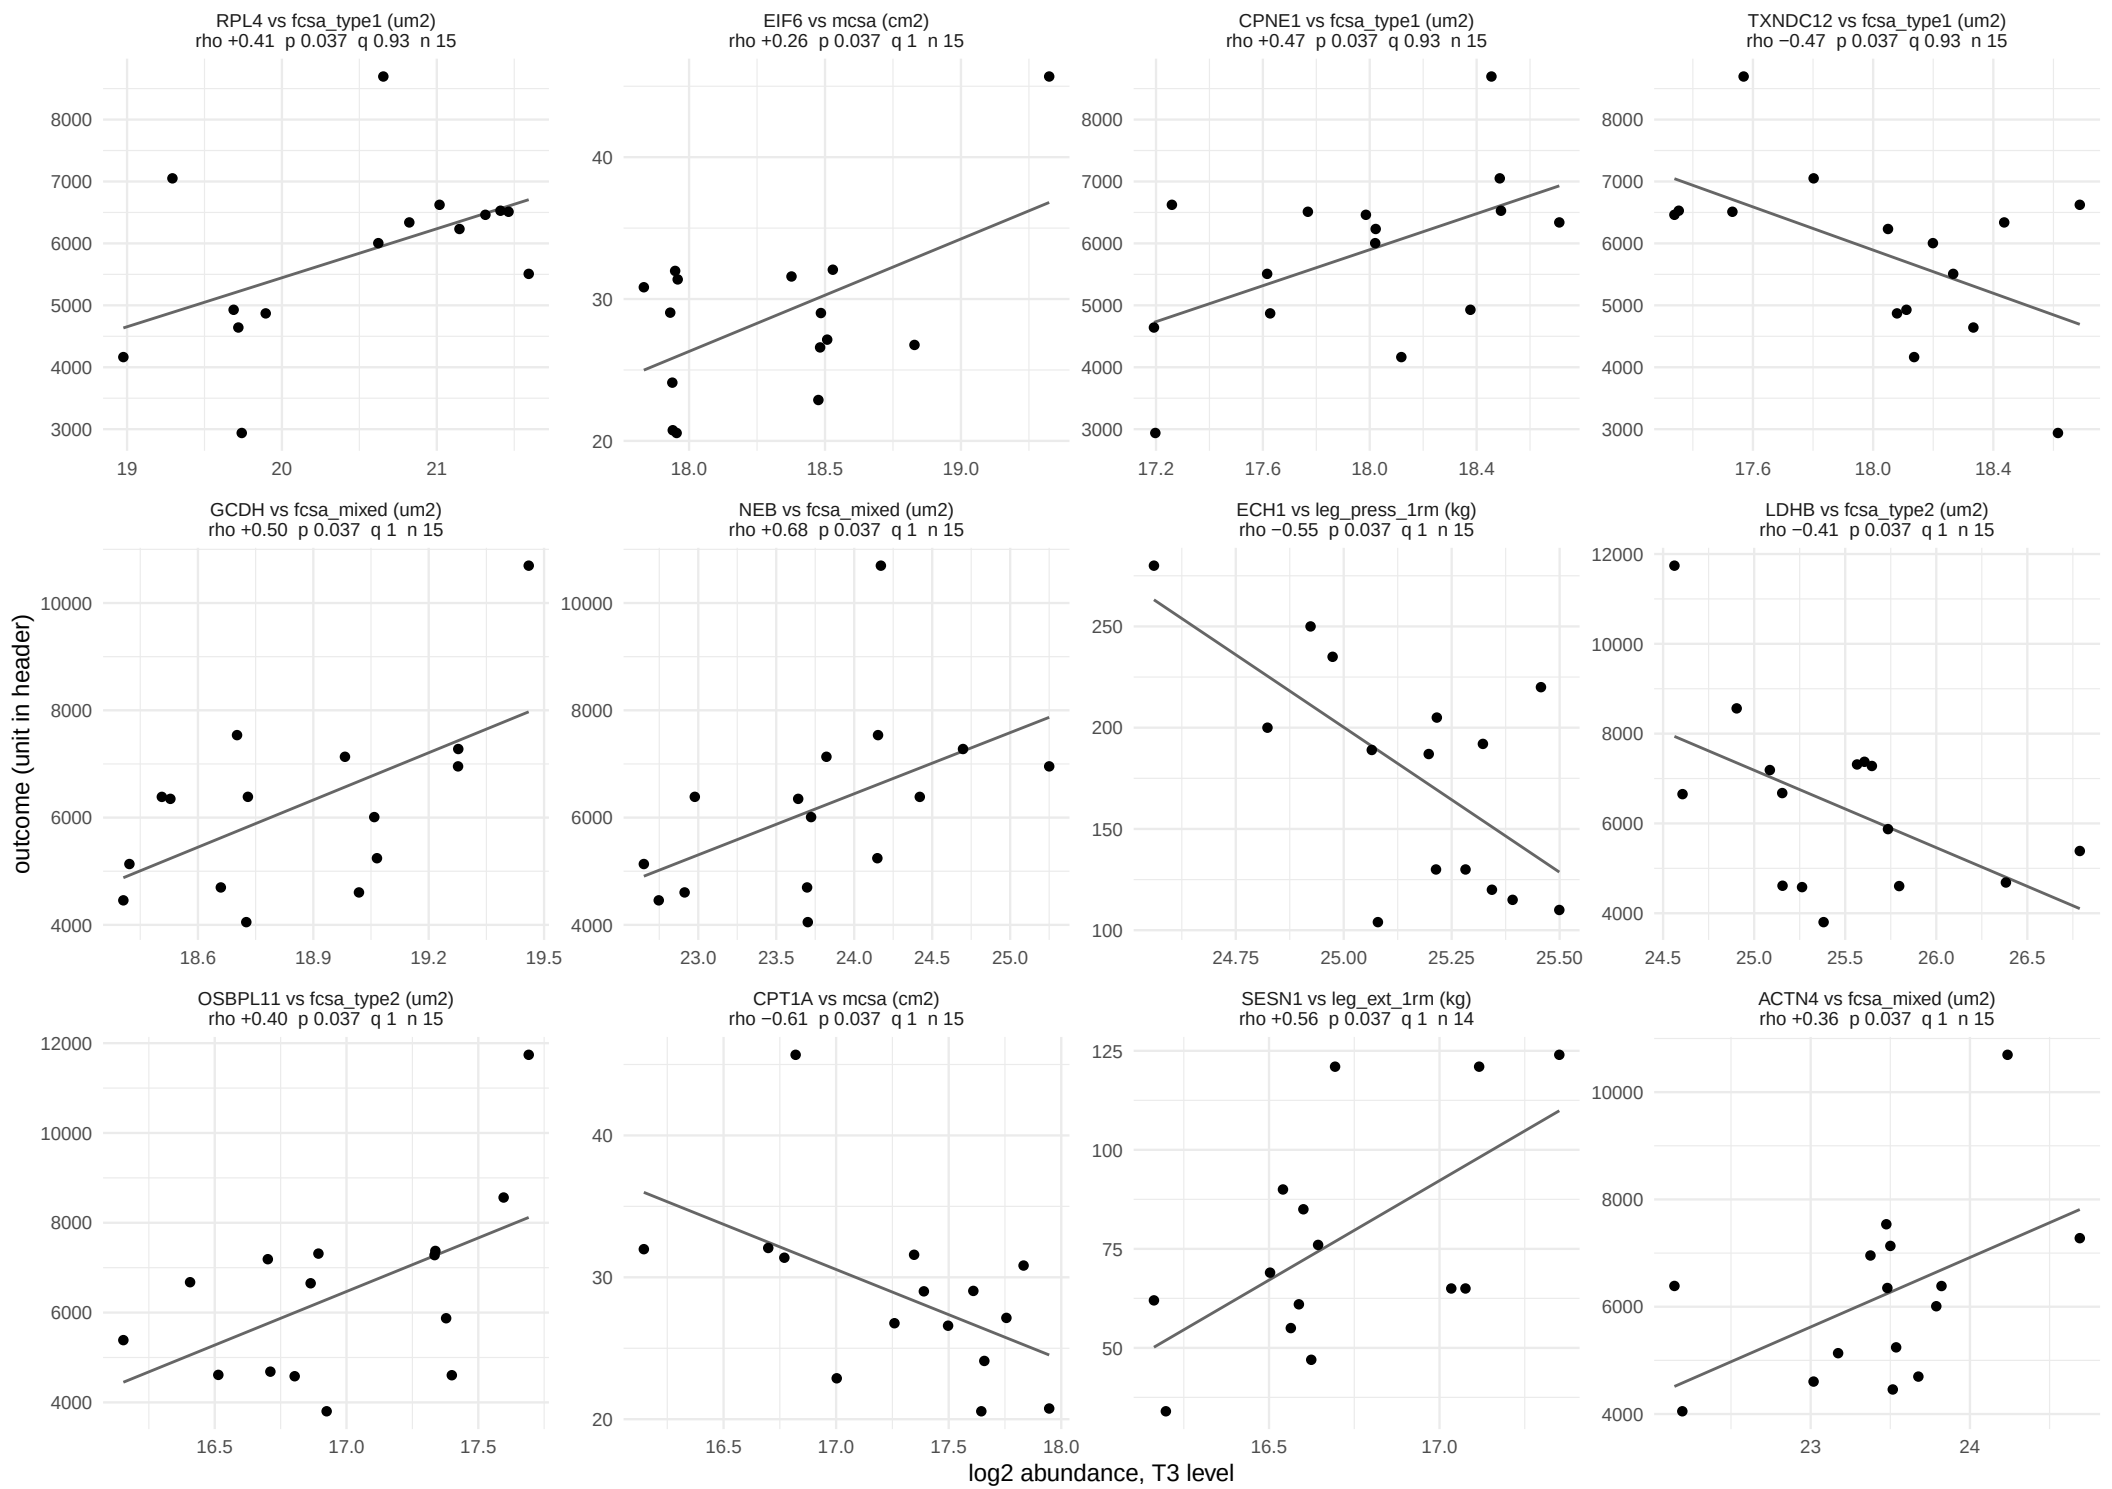

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, post_bout_level window


372 of 11400 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 23 of 31.

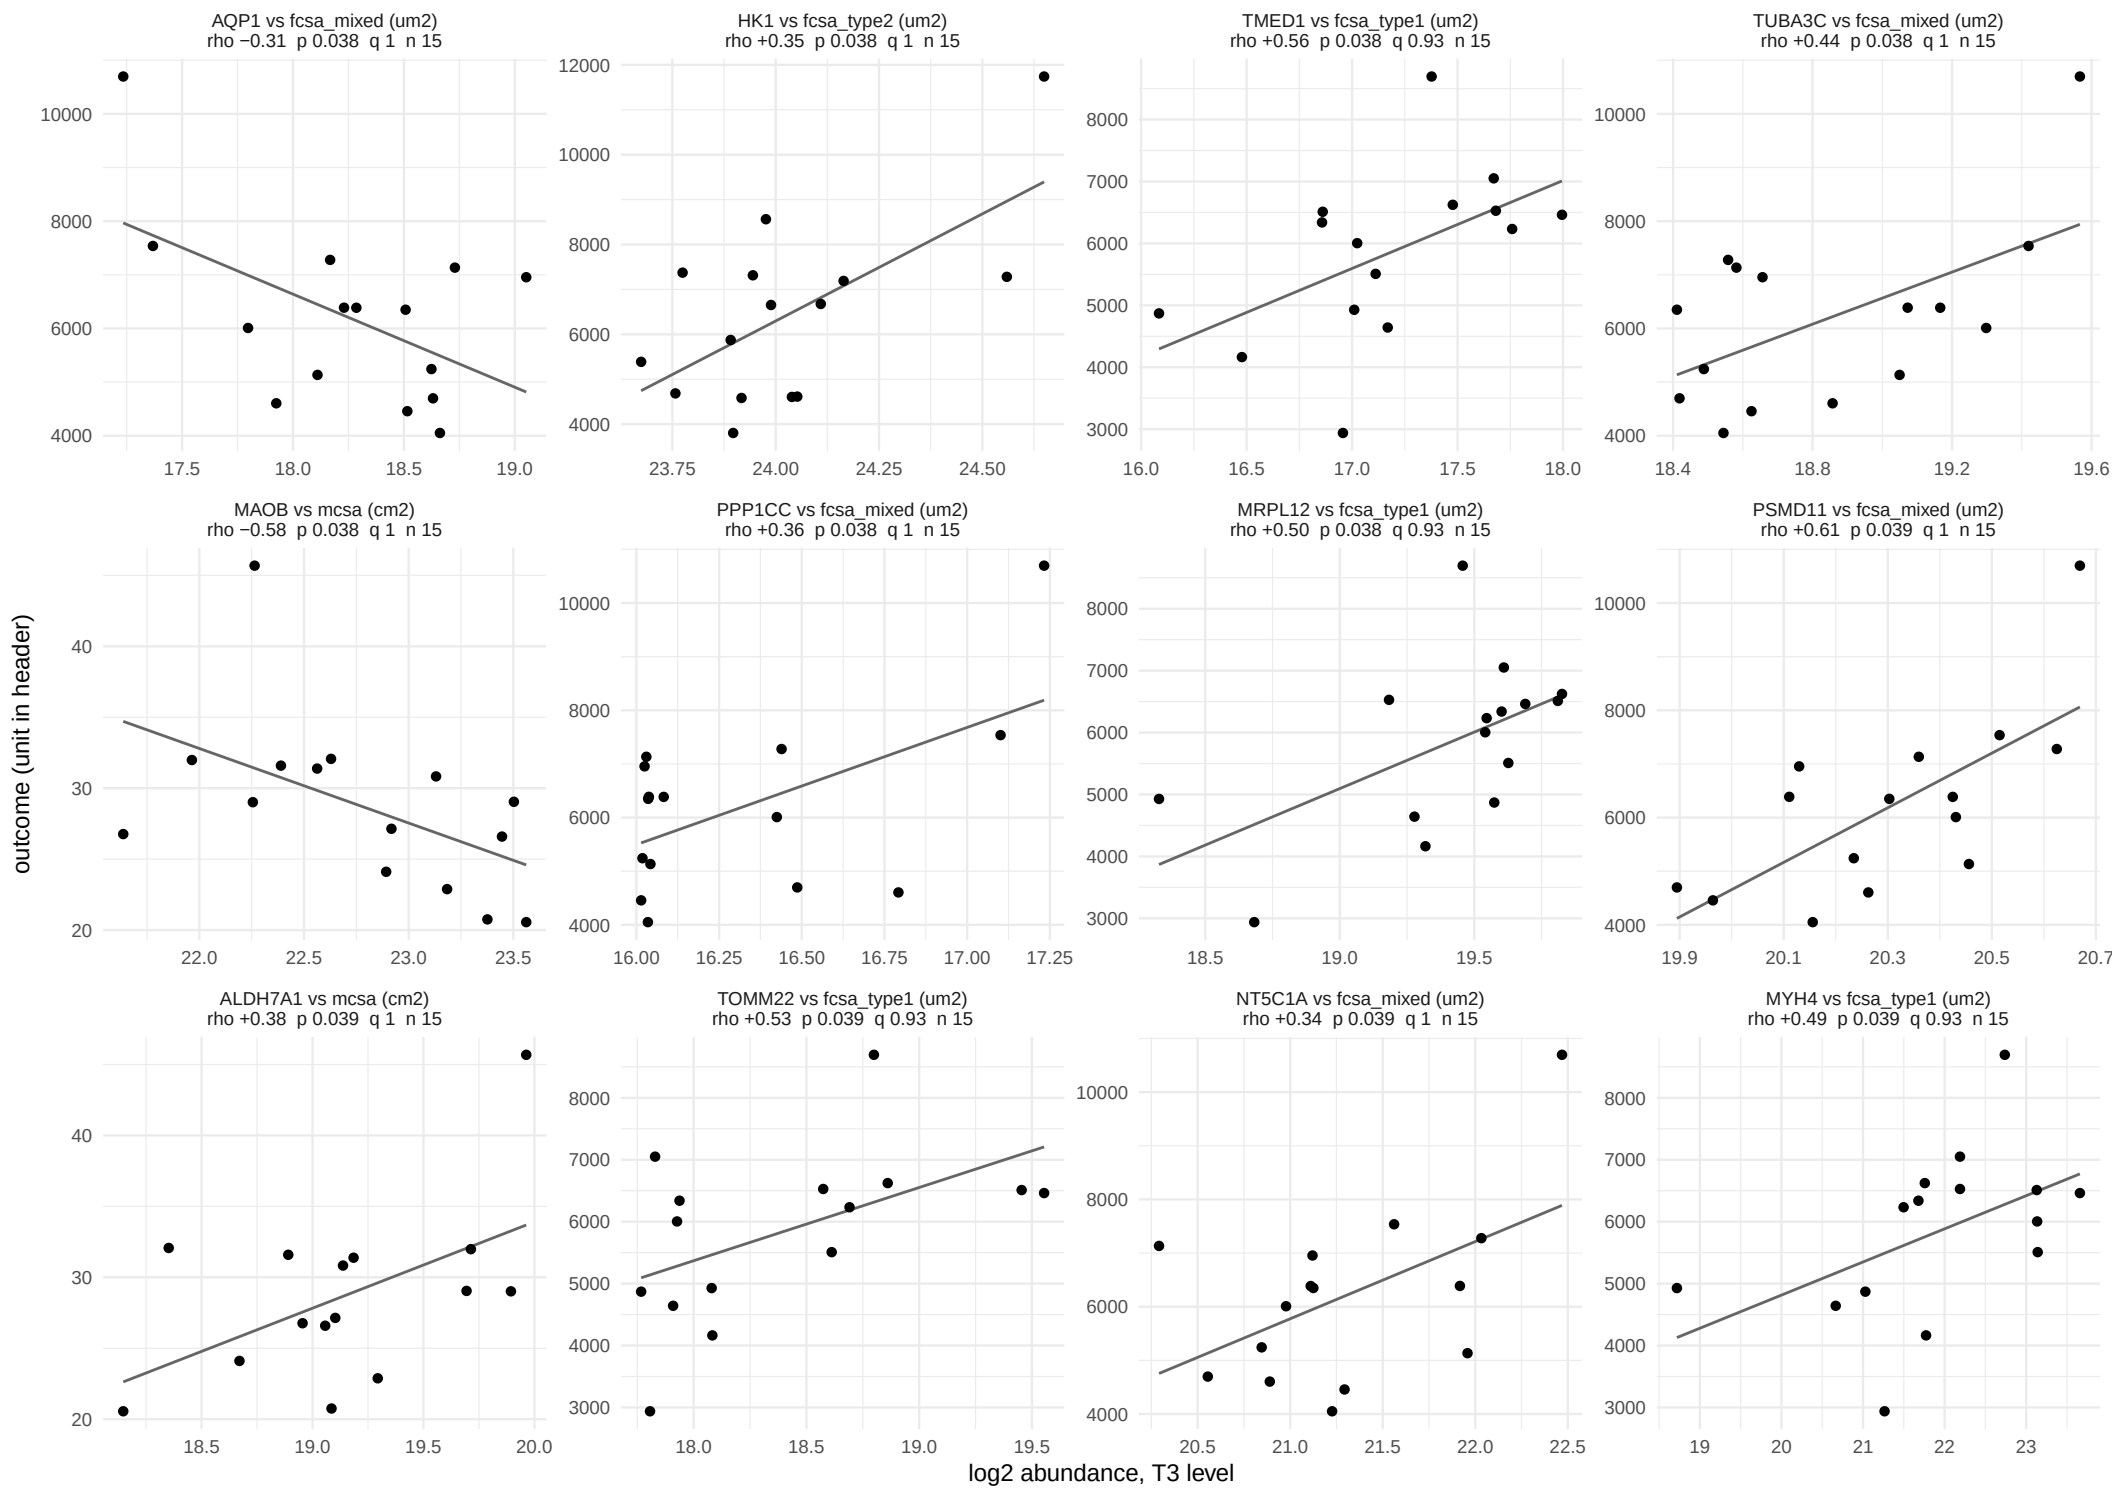

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, post_bout_level window


372 of 11400 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 24 of 31.

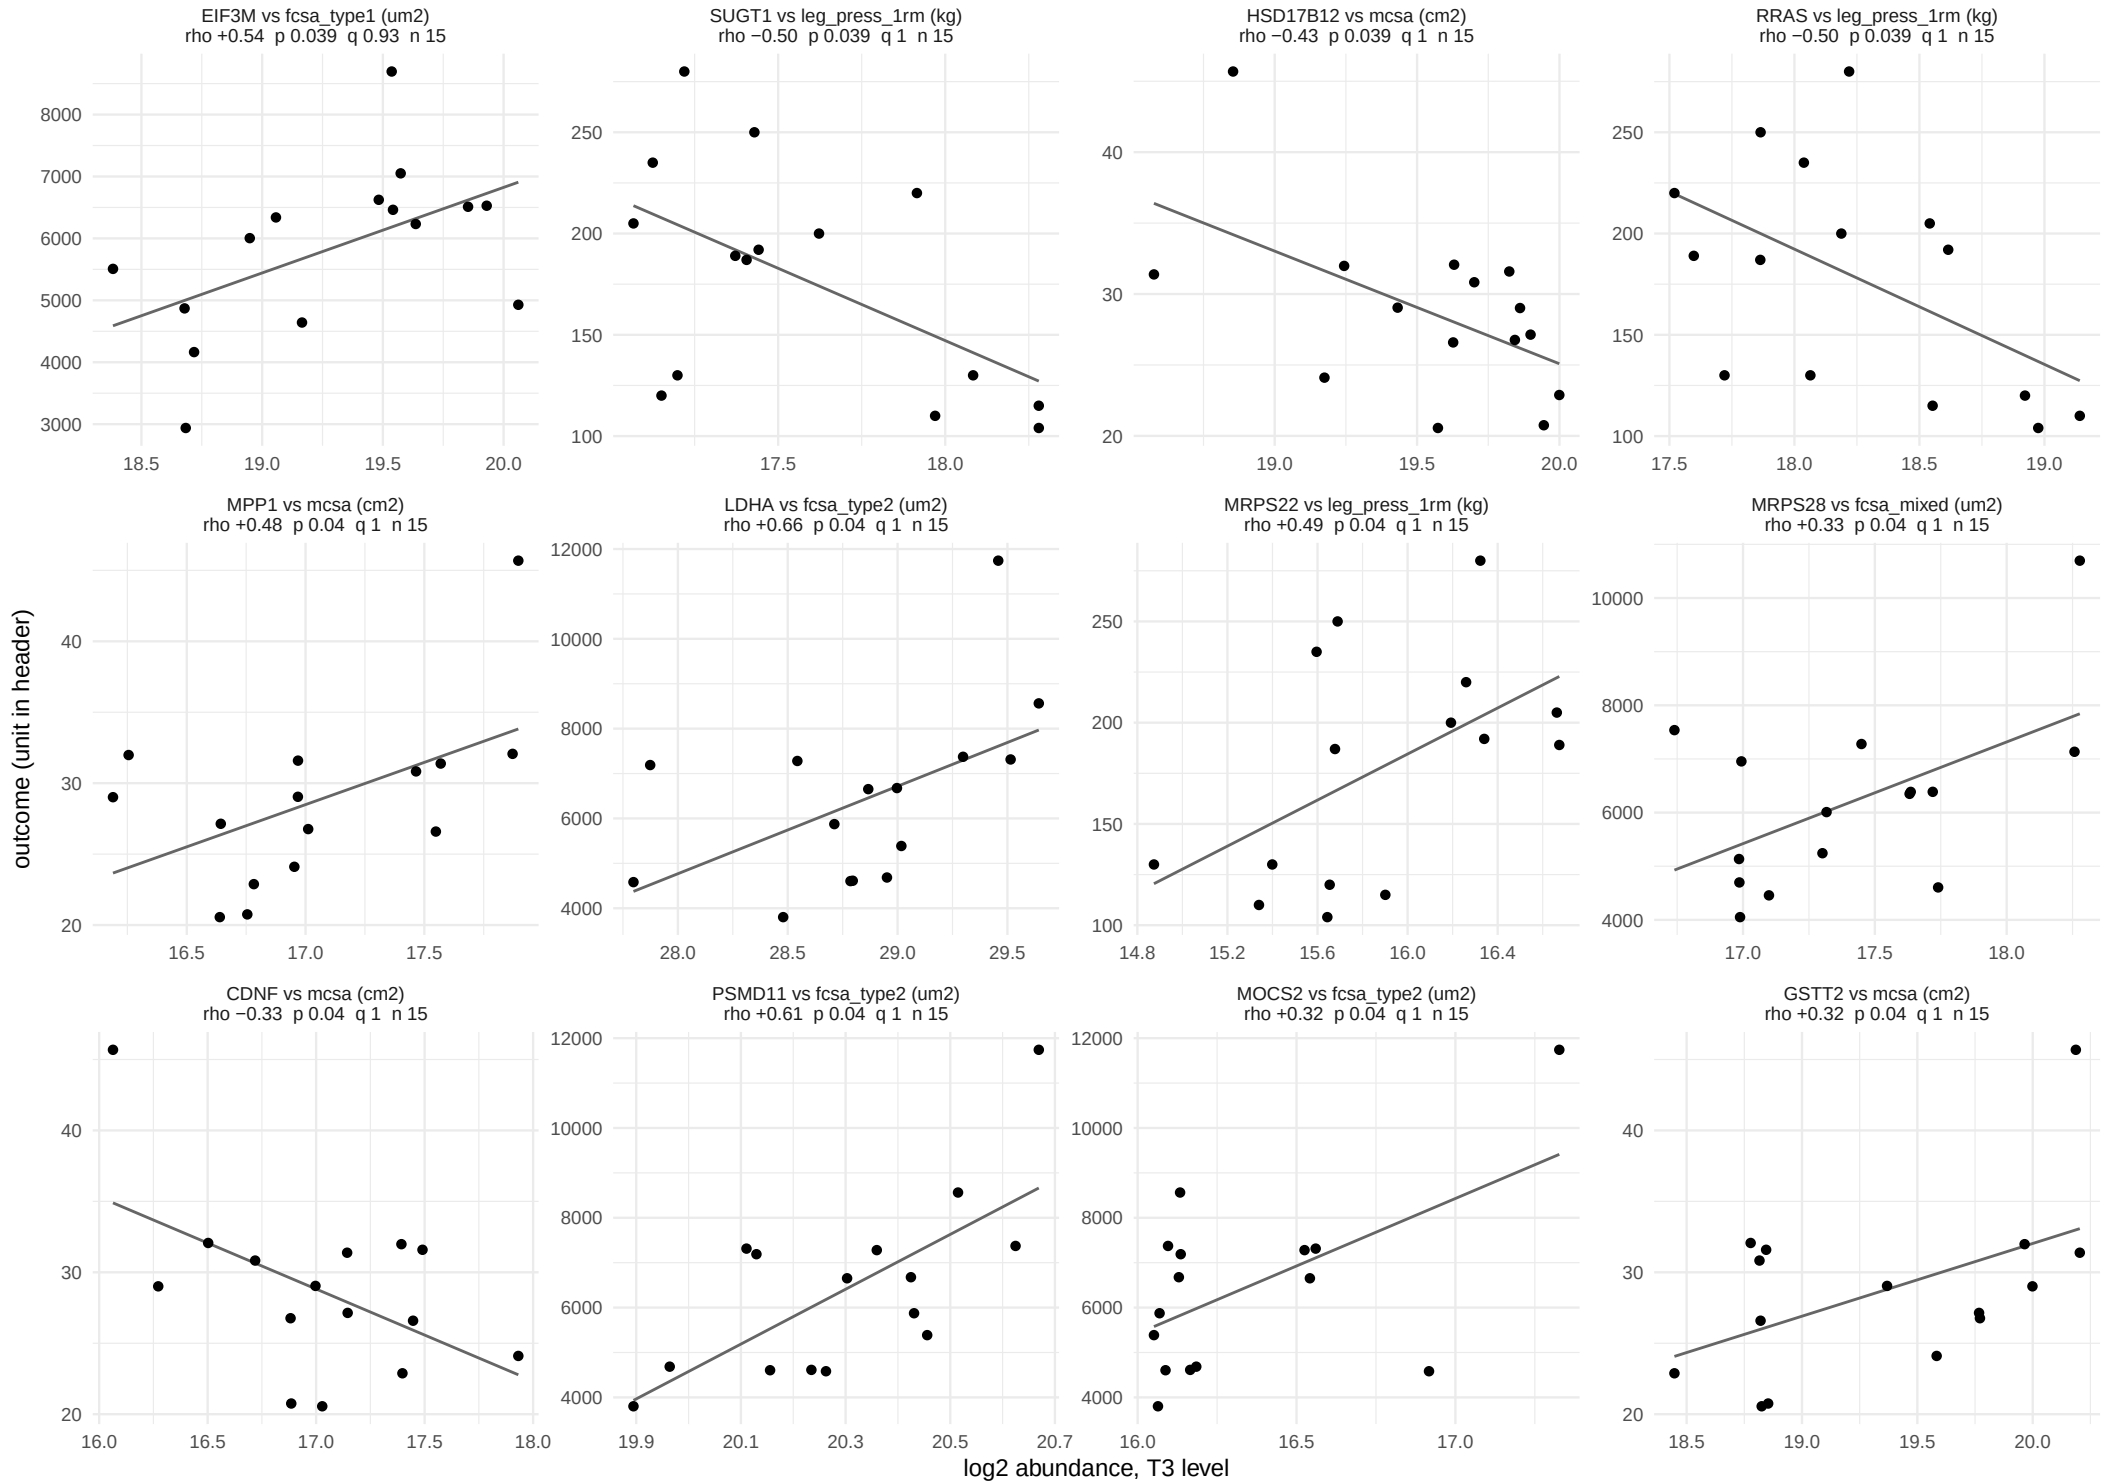

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, post_bout_level window


372 of 11400 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 25 of 31.

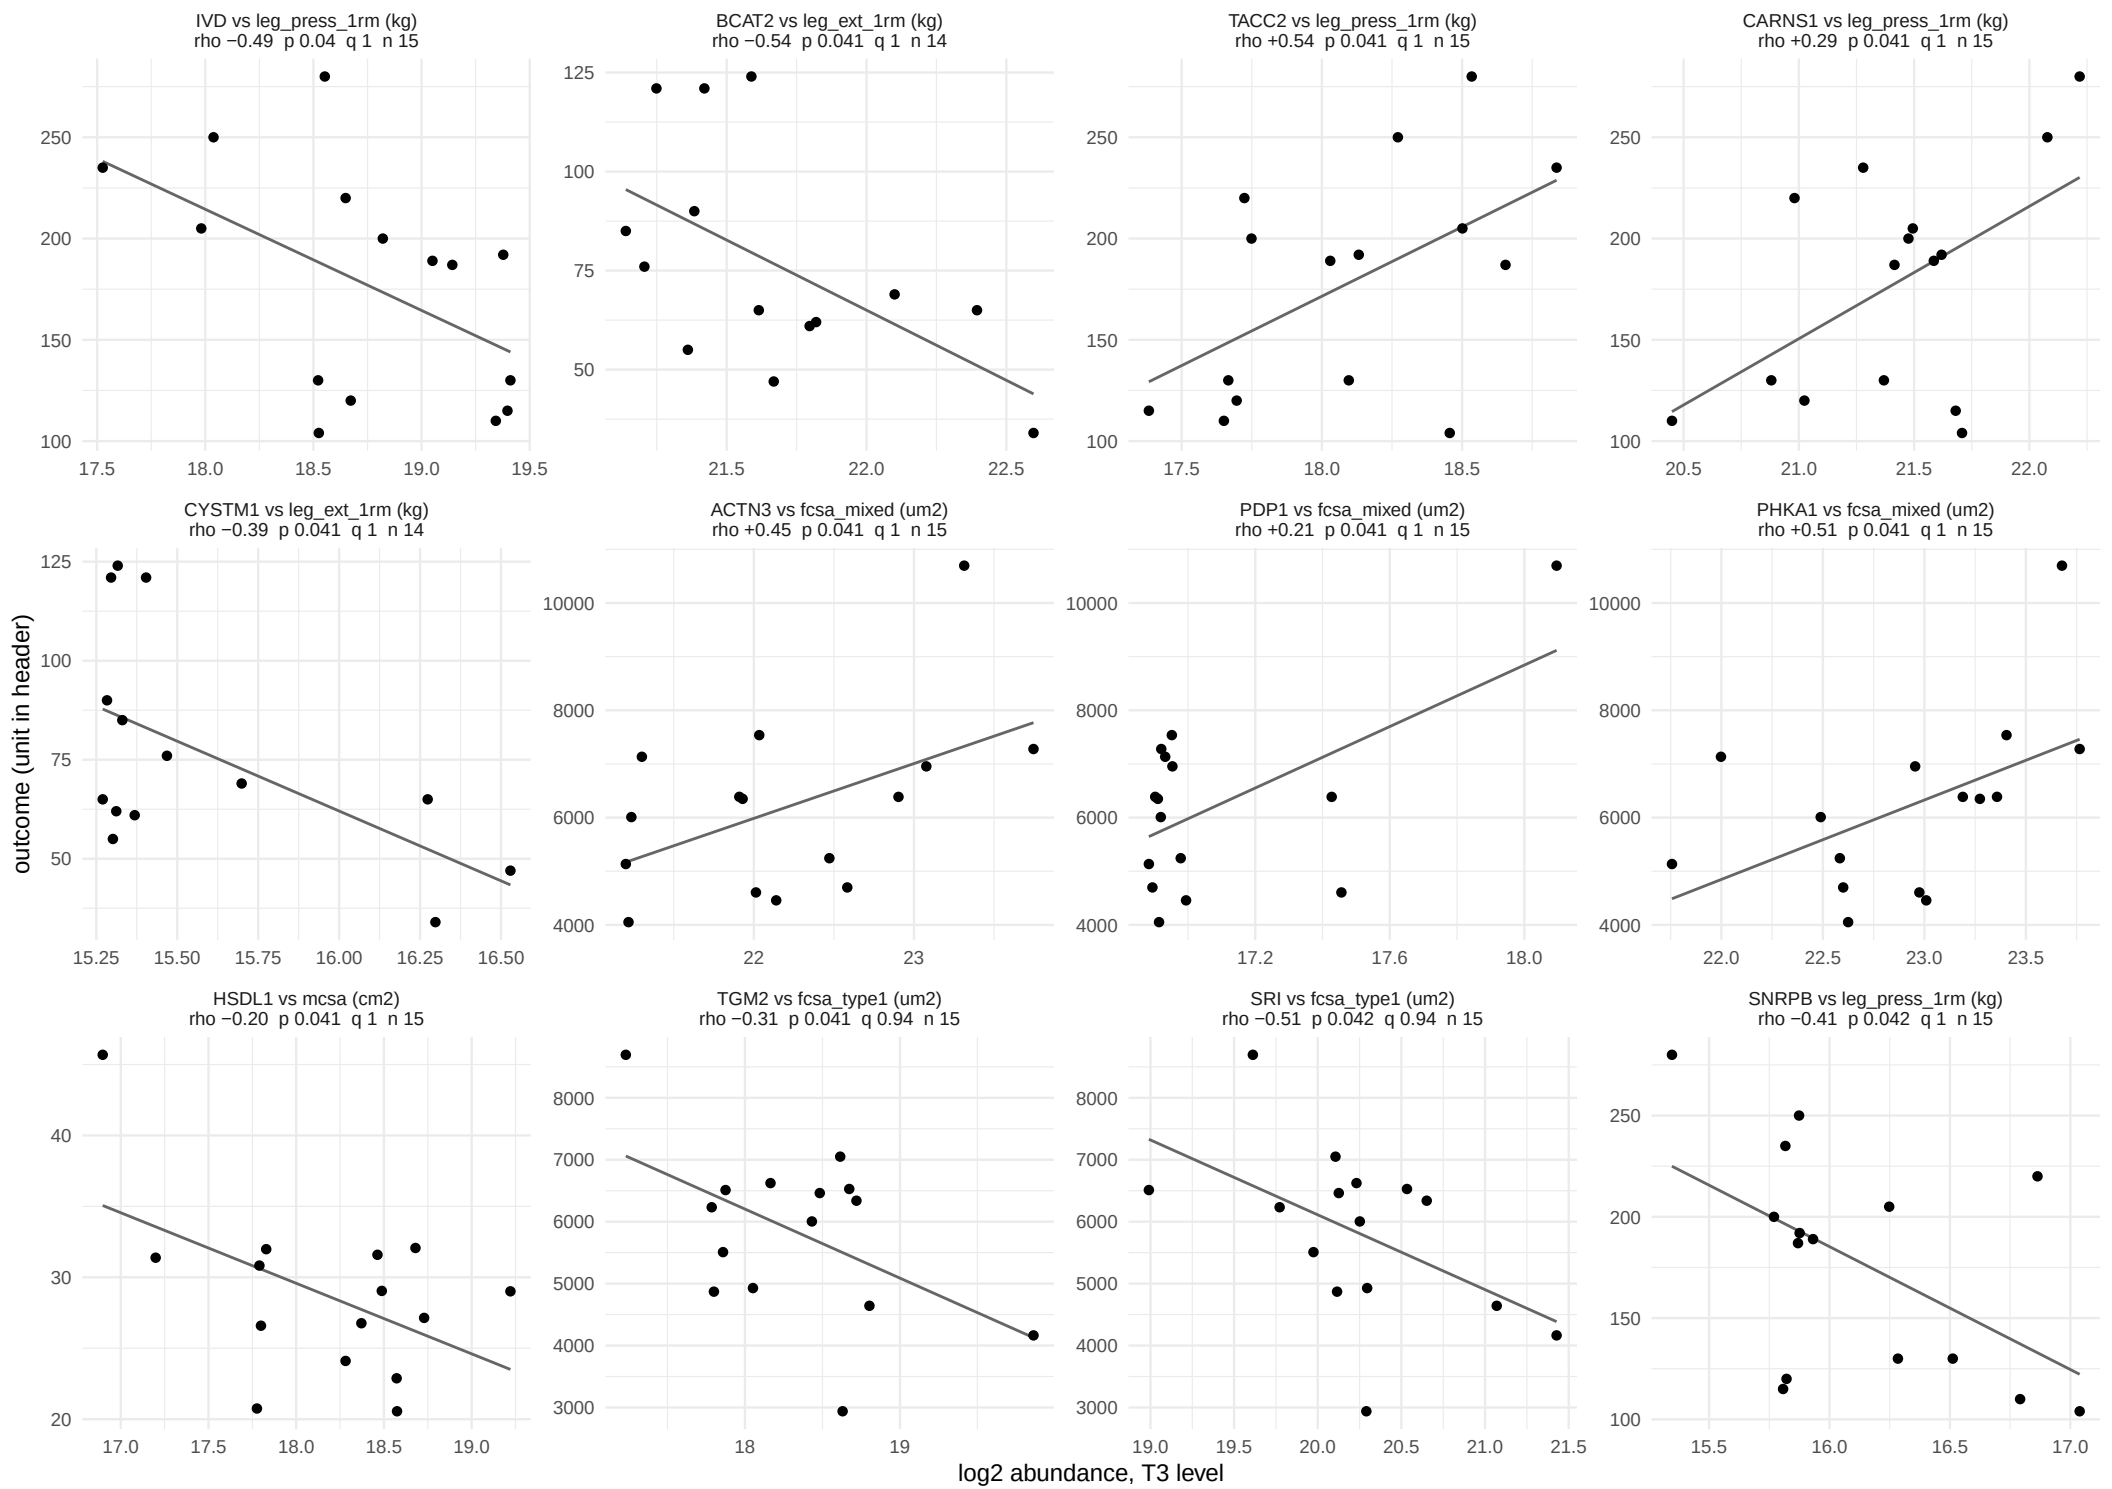

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, post_bout_level window


372 of 11400 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 26 of 31.

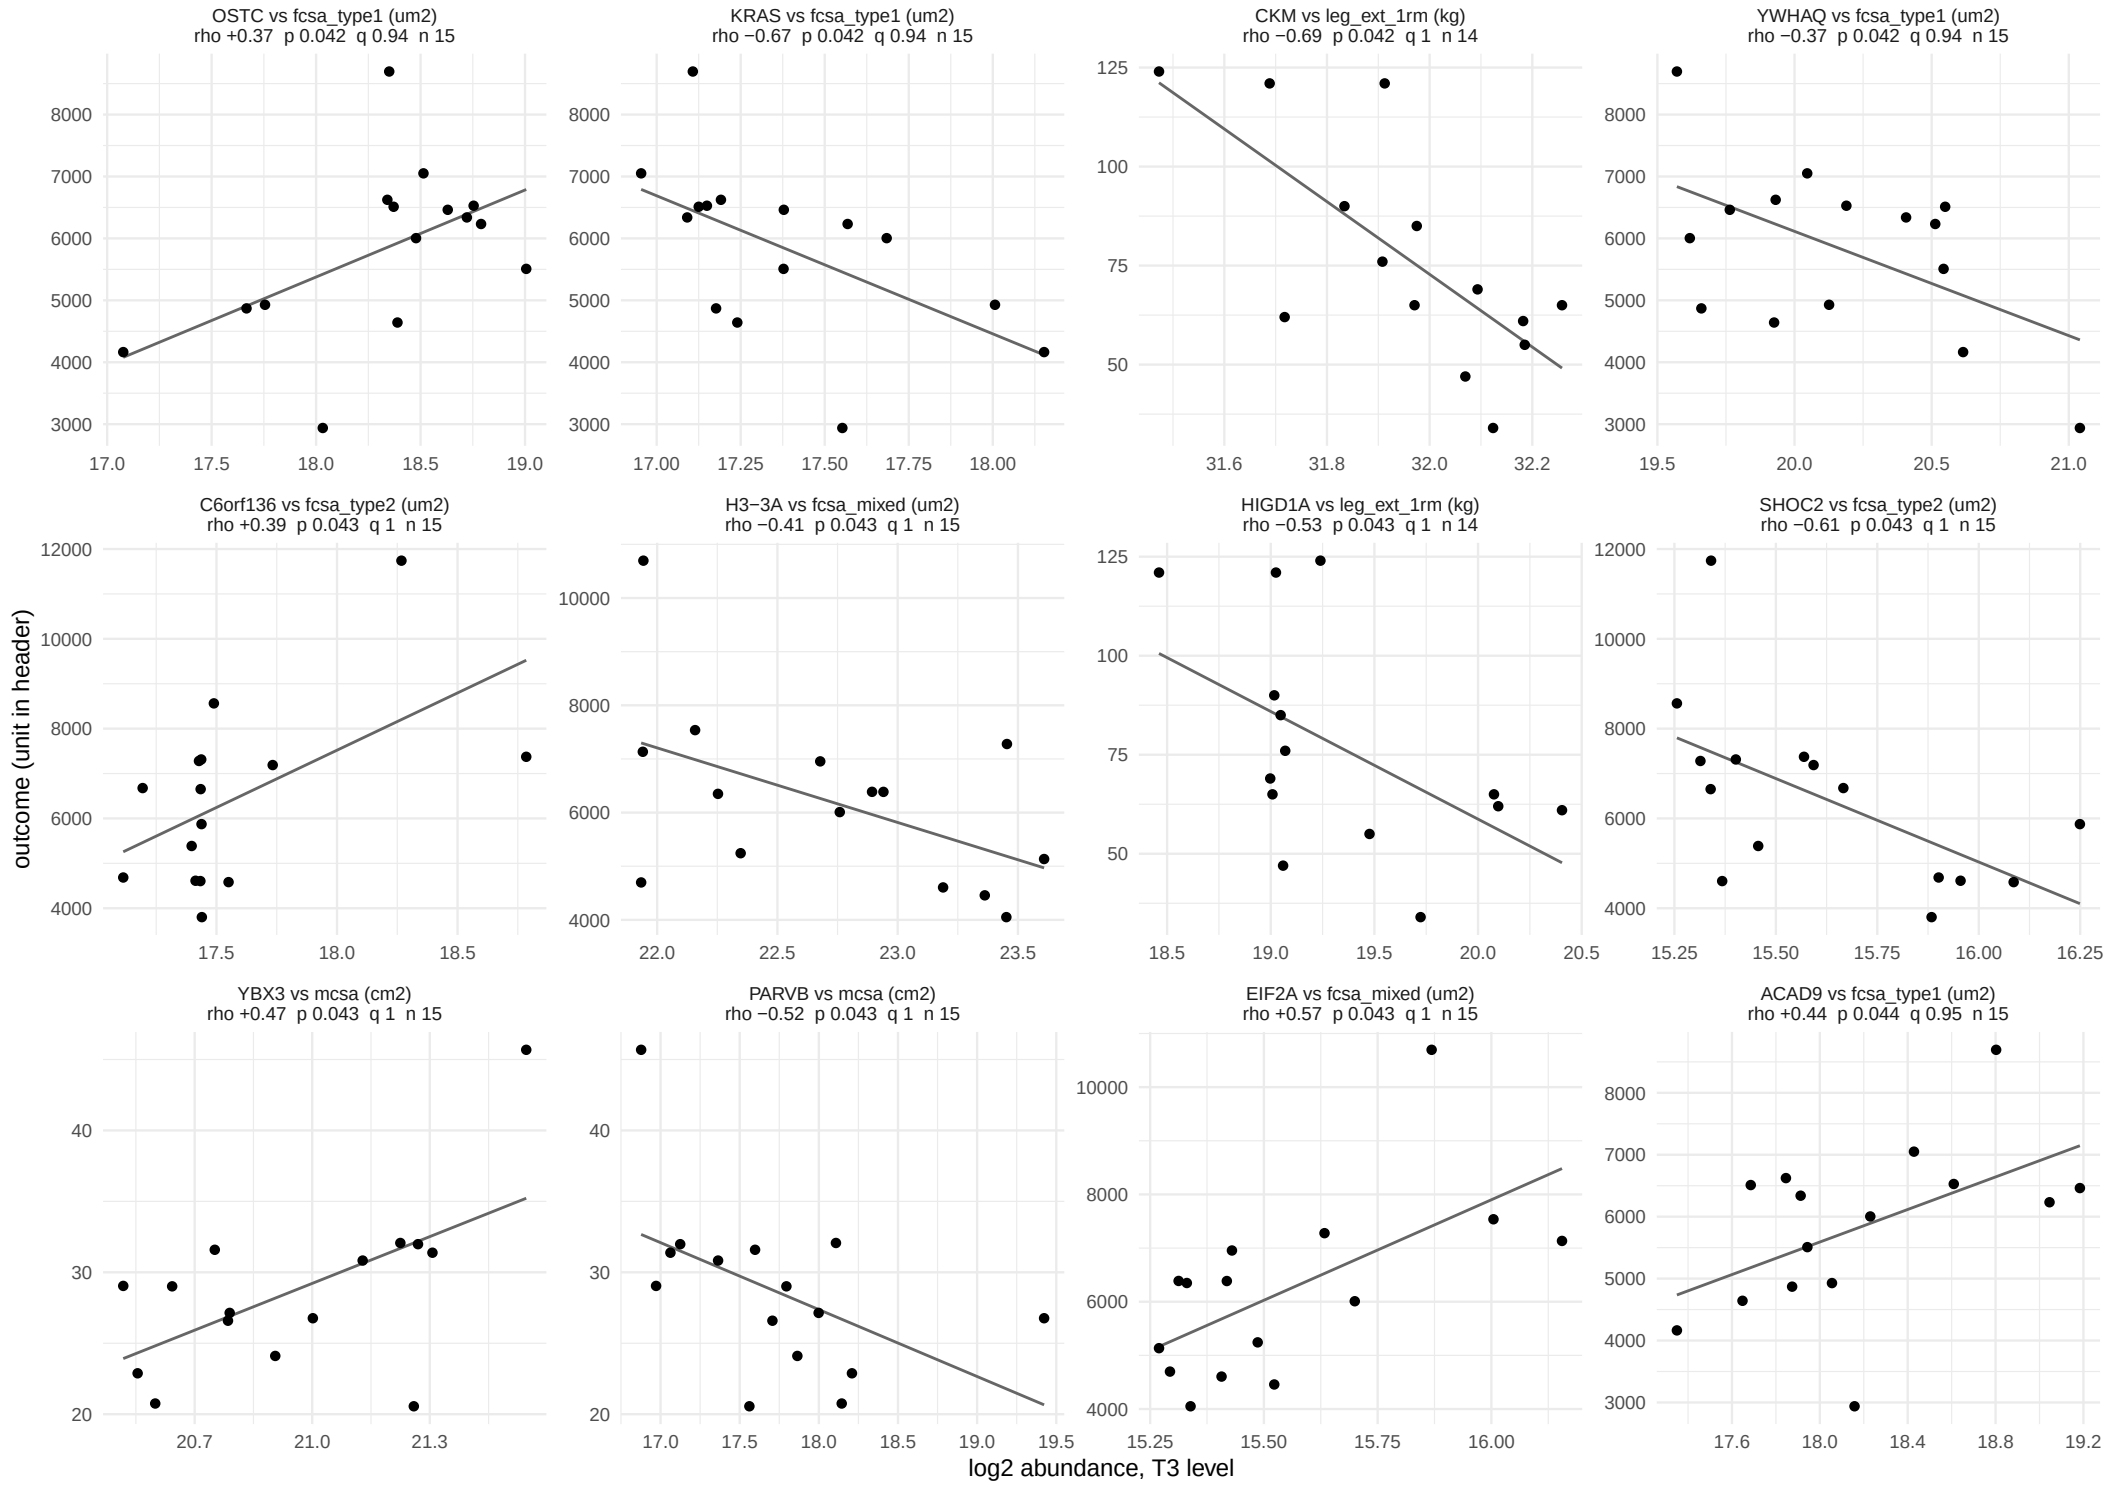

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, post_bout_level window


372 of 11400 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 27 of 31.

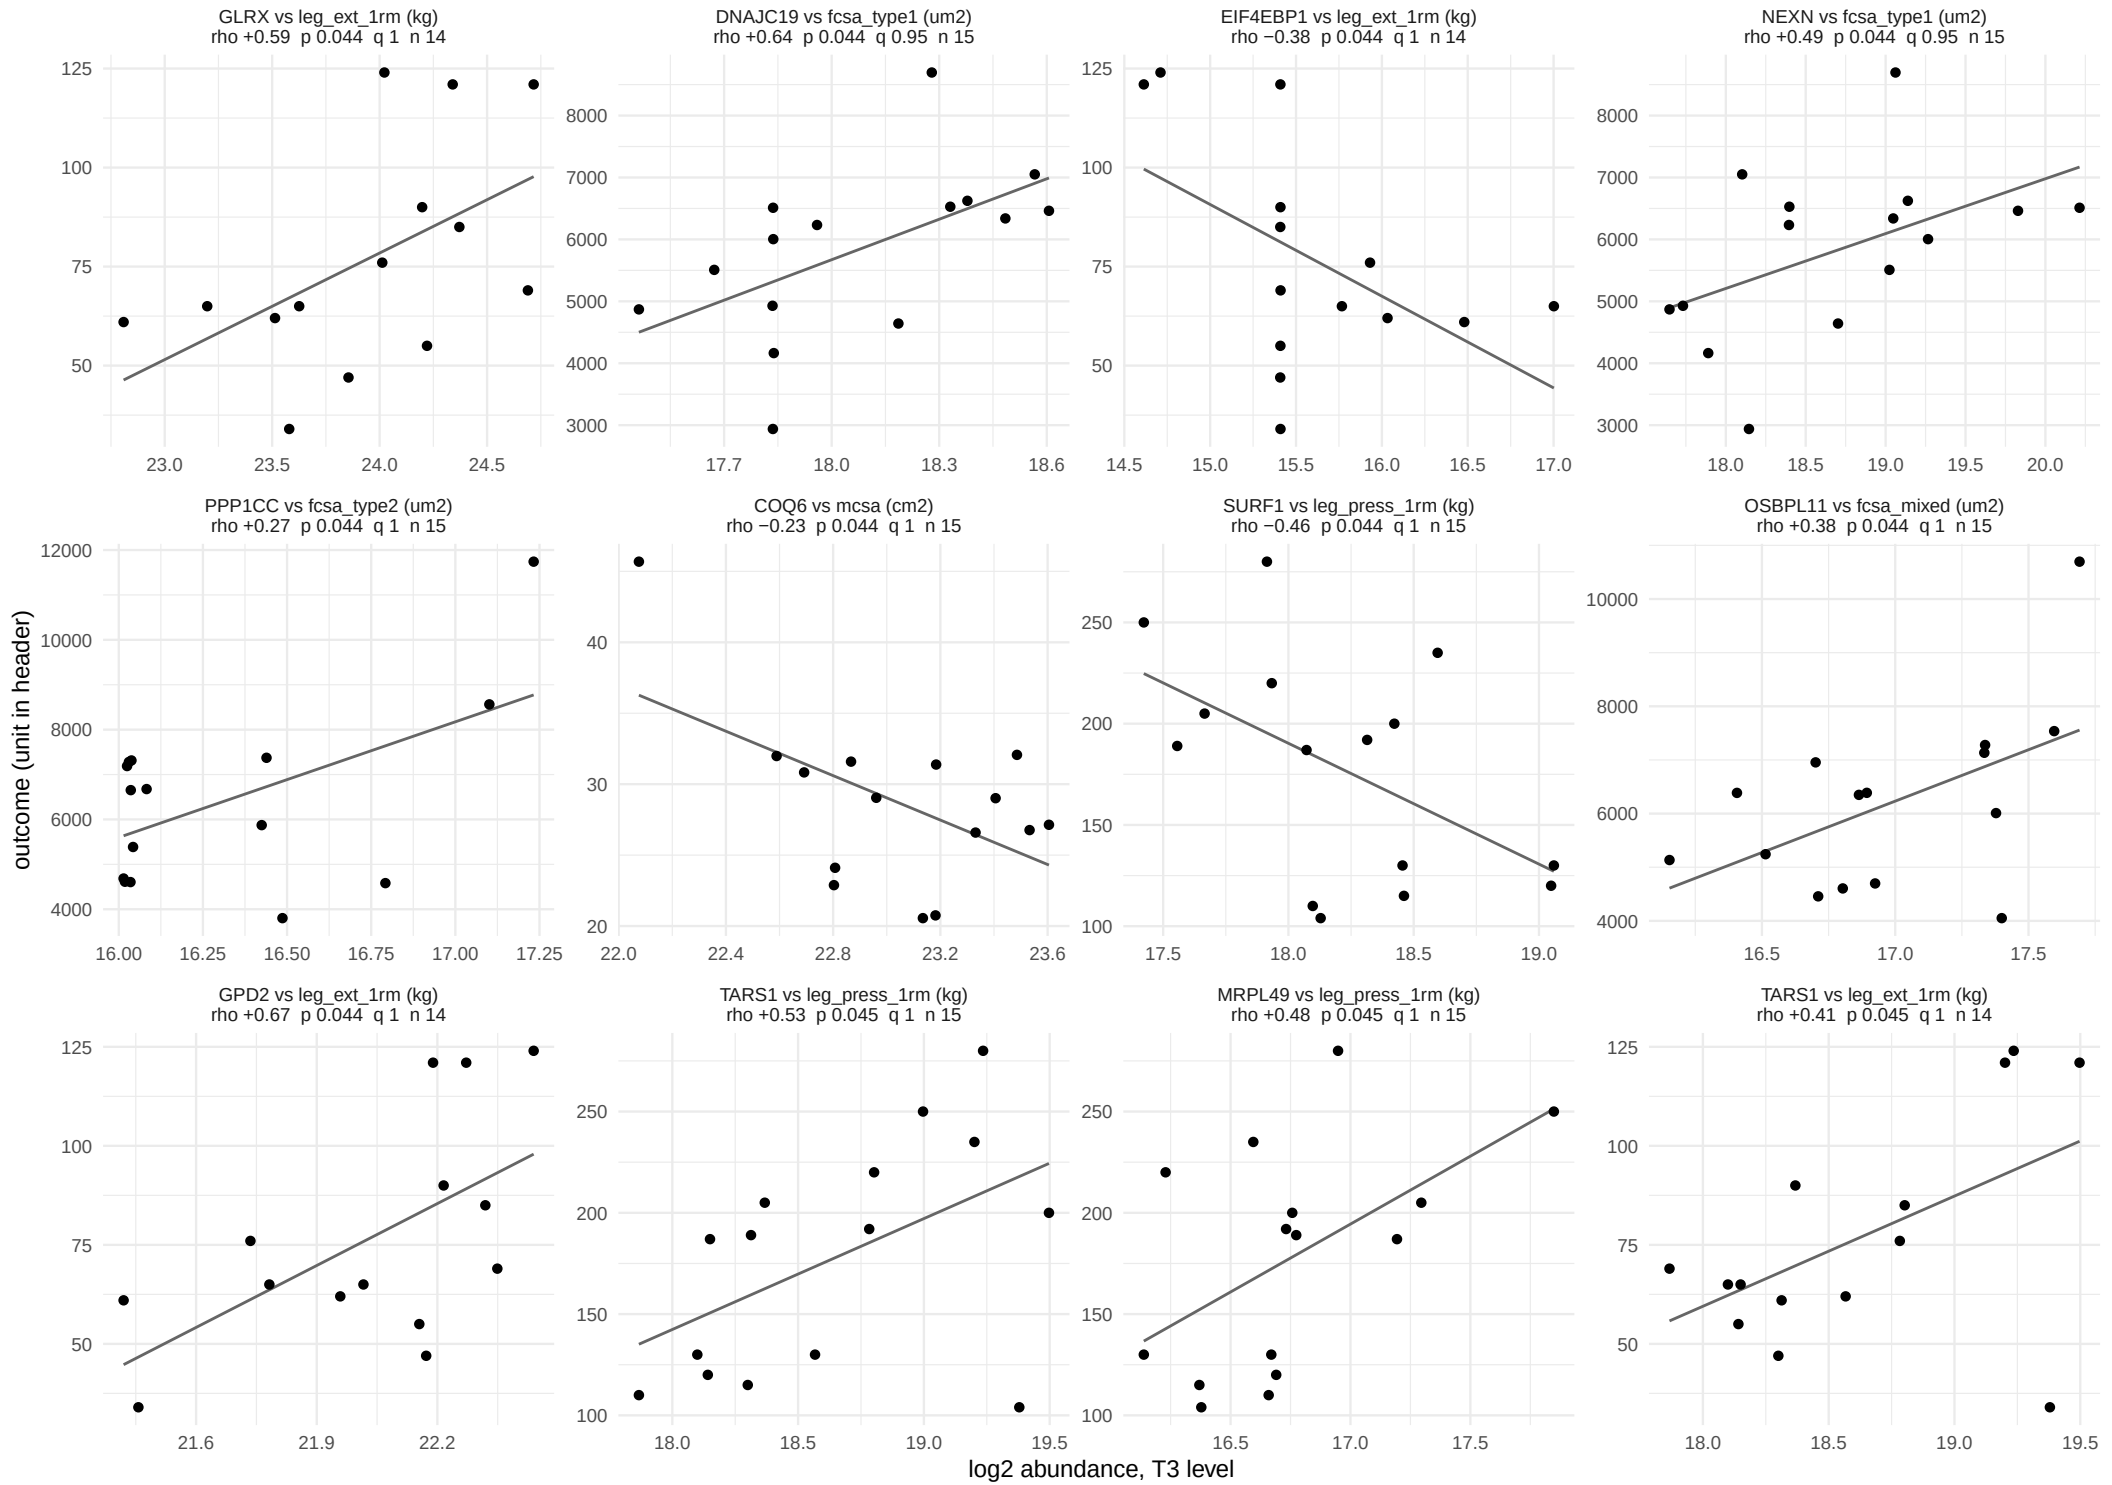

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, post_bout_level window


372 of 11400 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 28 of 31.

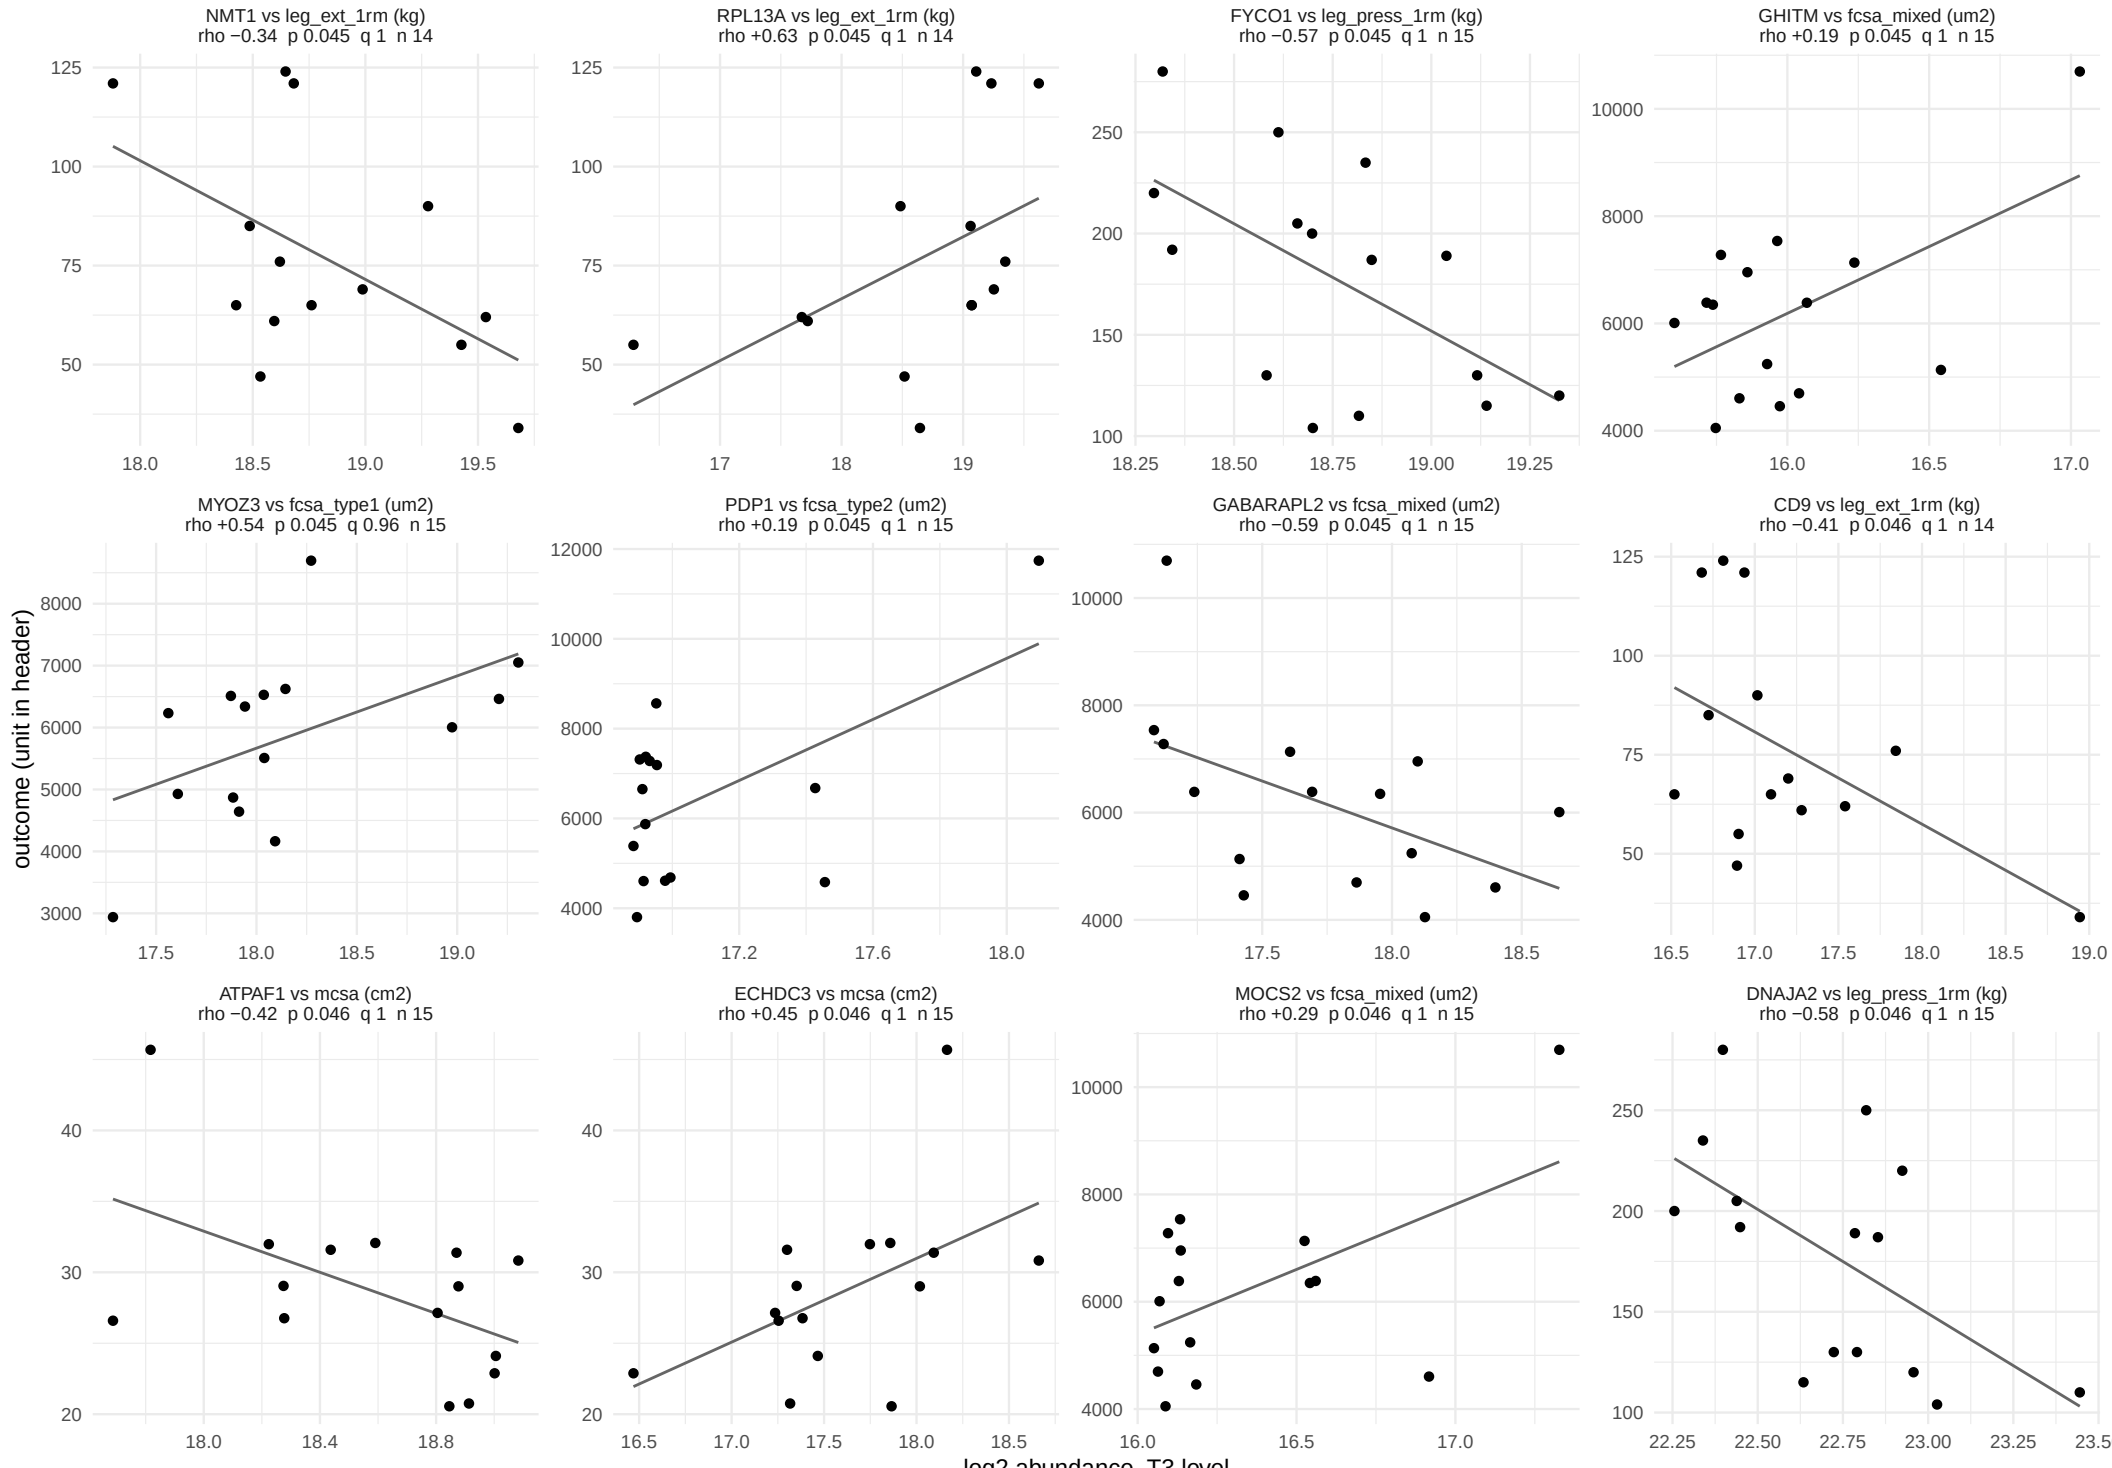

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, post_bout_level window


372 of 11400 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 29 of 31.

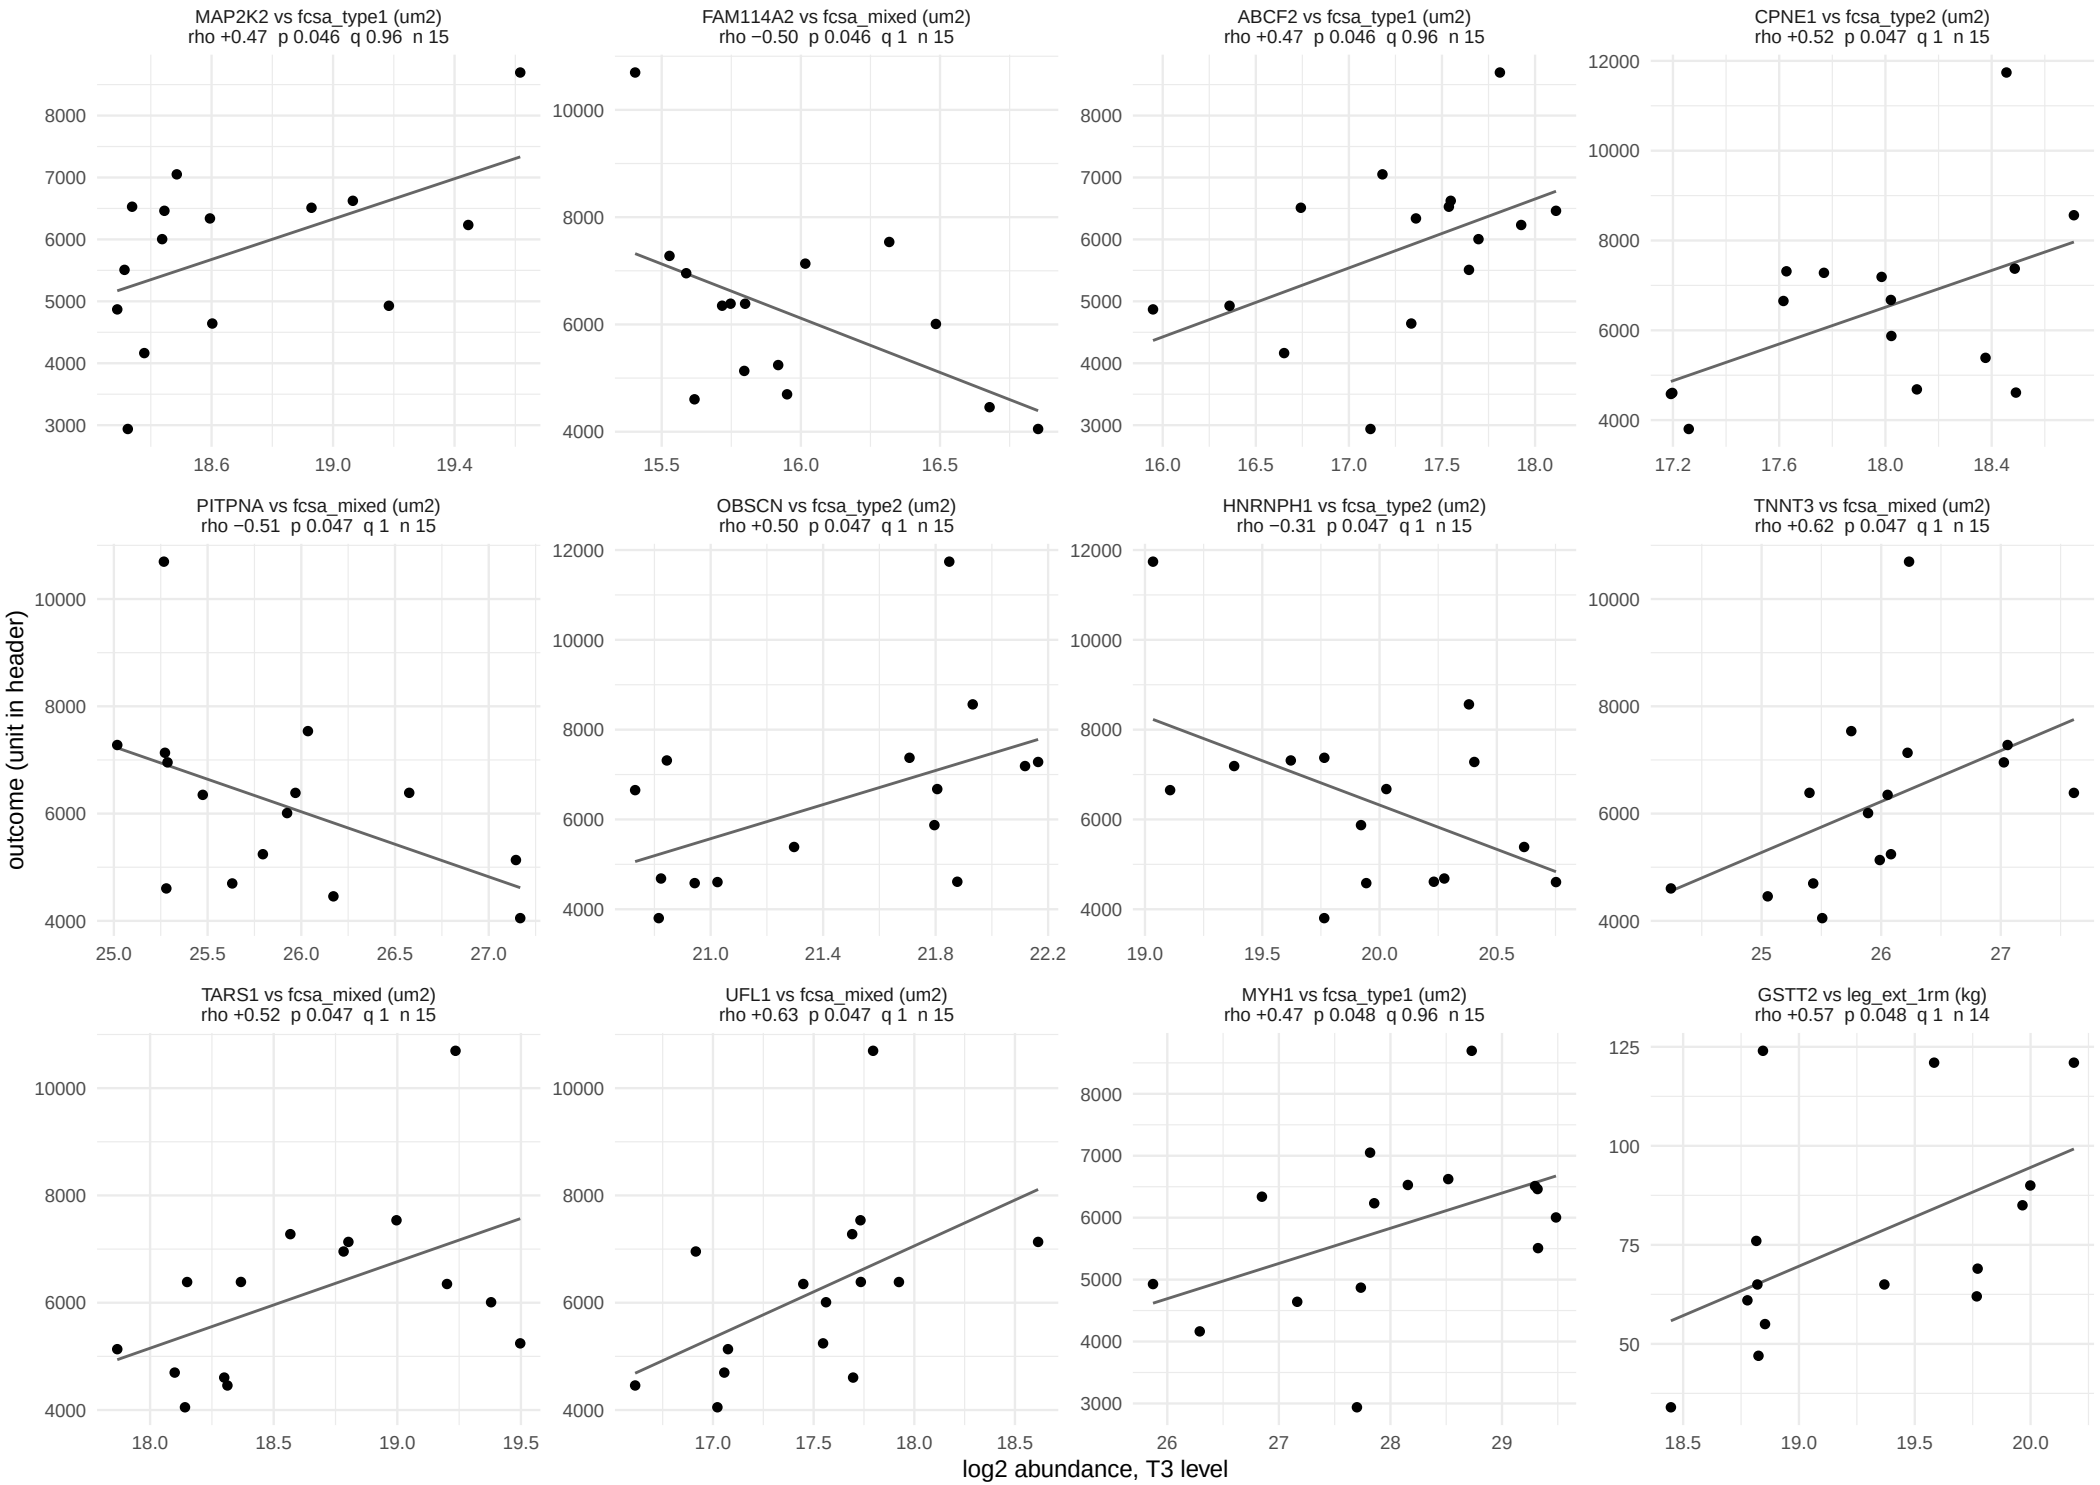

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, post_bout_level window


372 of 11400 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 30 of 31.

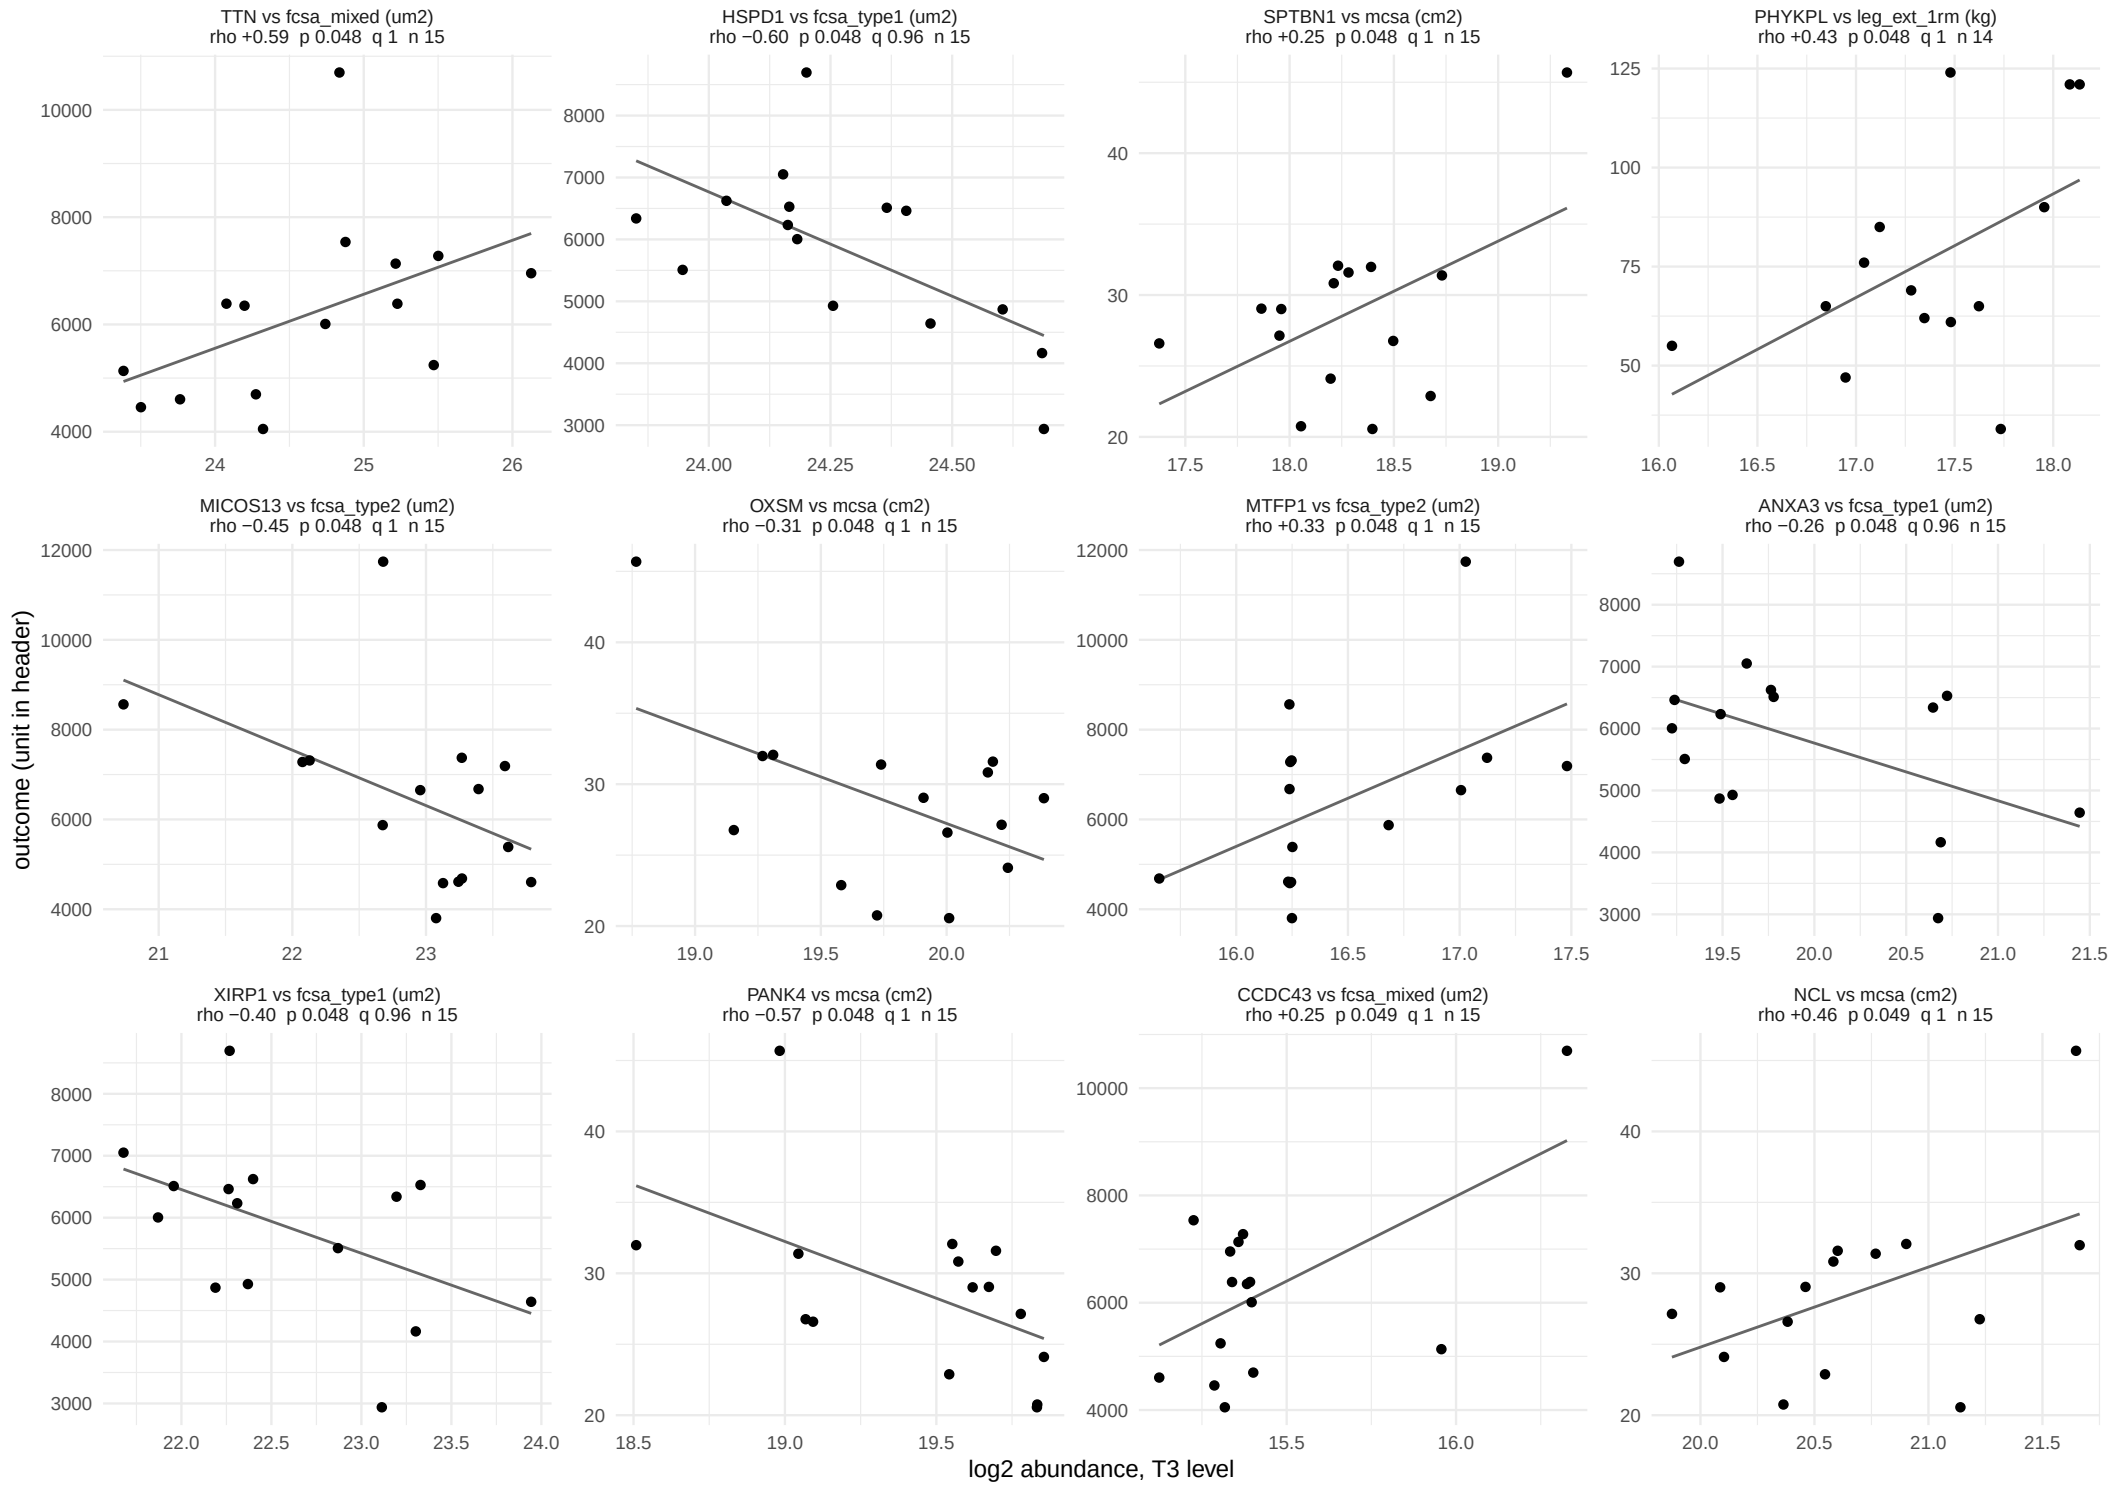

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Change score, post_bout_level window


372 of 11400 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 31 of 31.

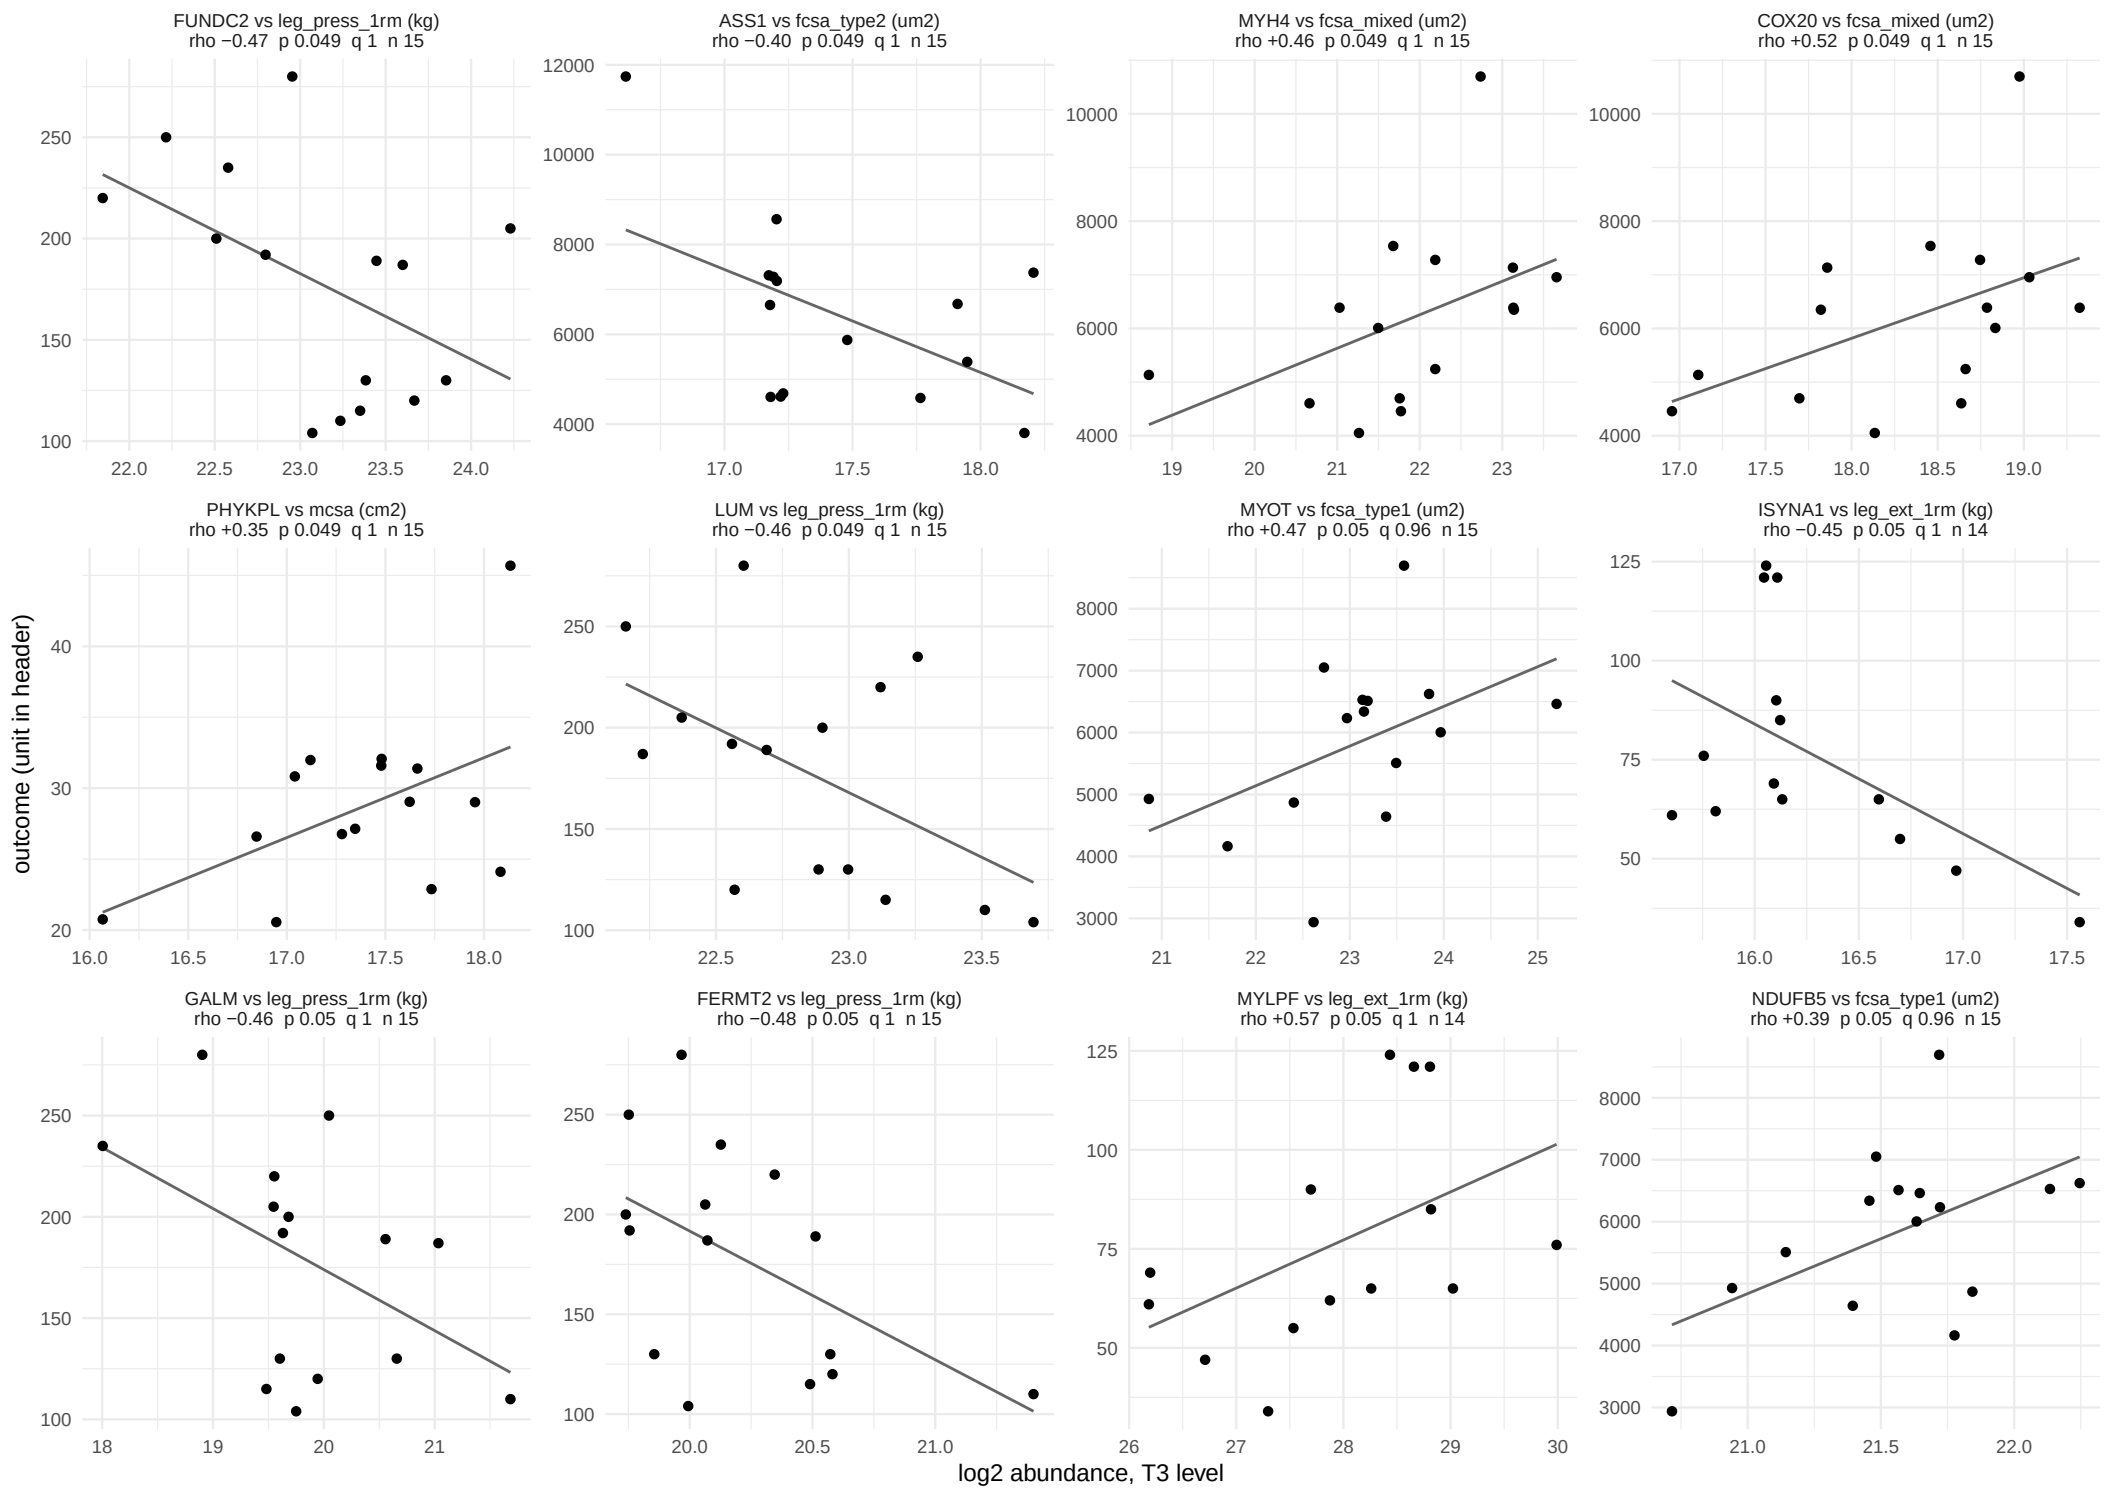

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome, with the subjects used. Table: c_data/01_proteins.xlsx, change_score.

Two predictor, training window


288 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 1 of 24.

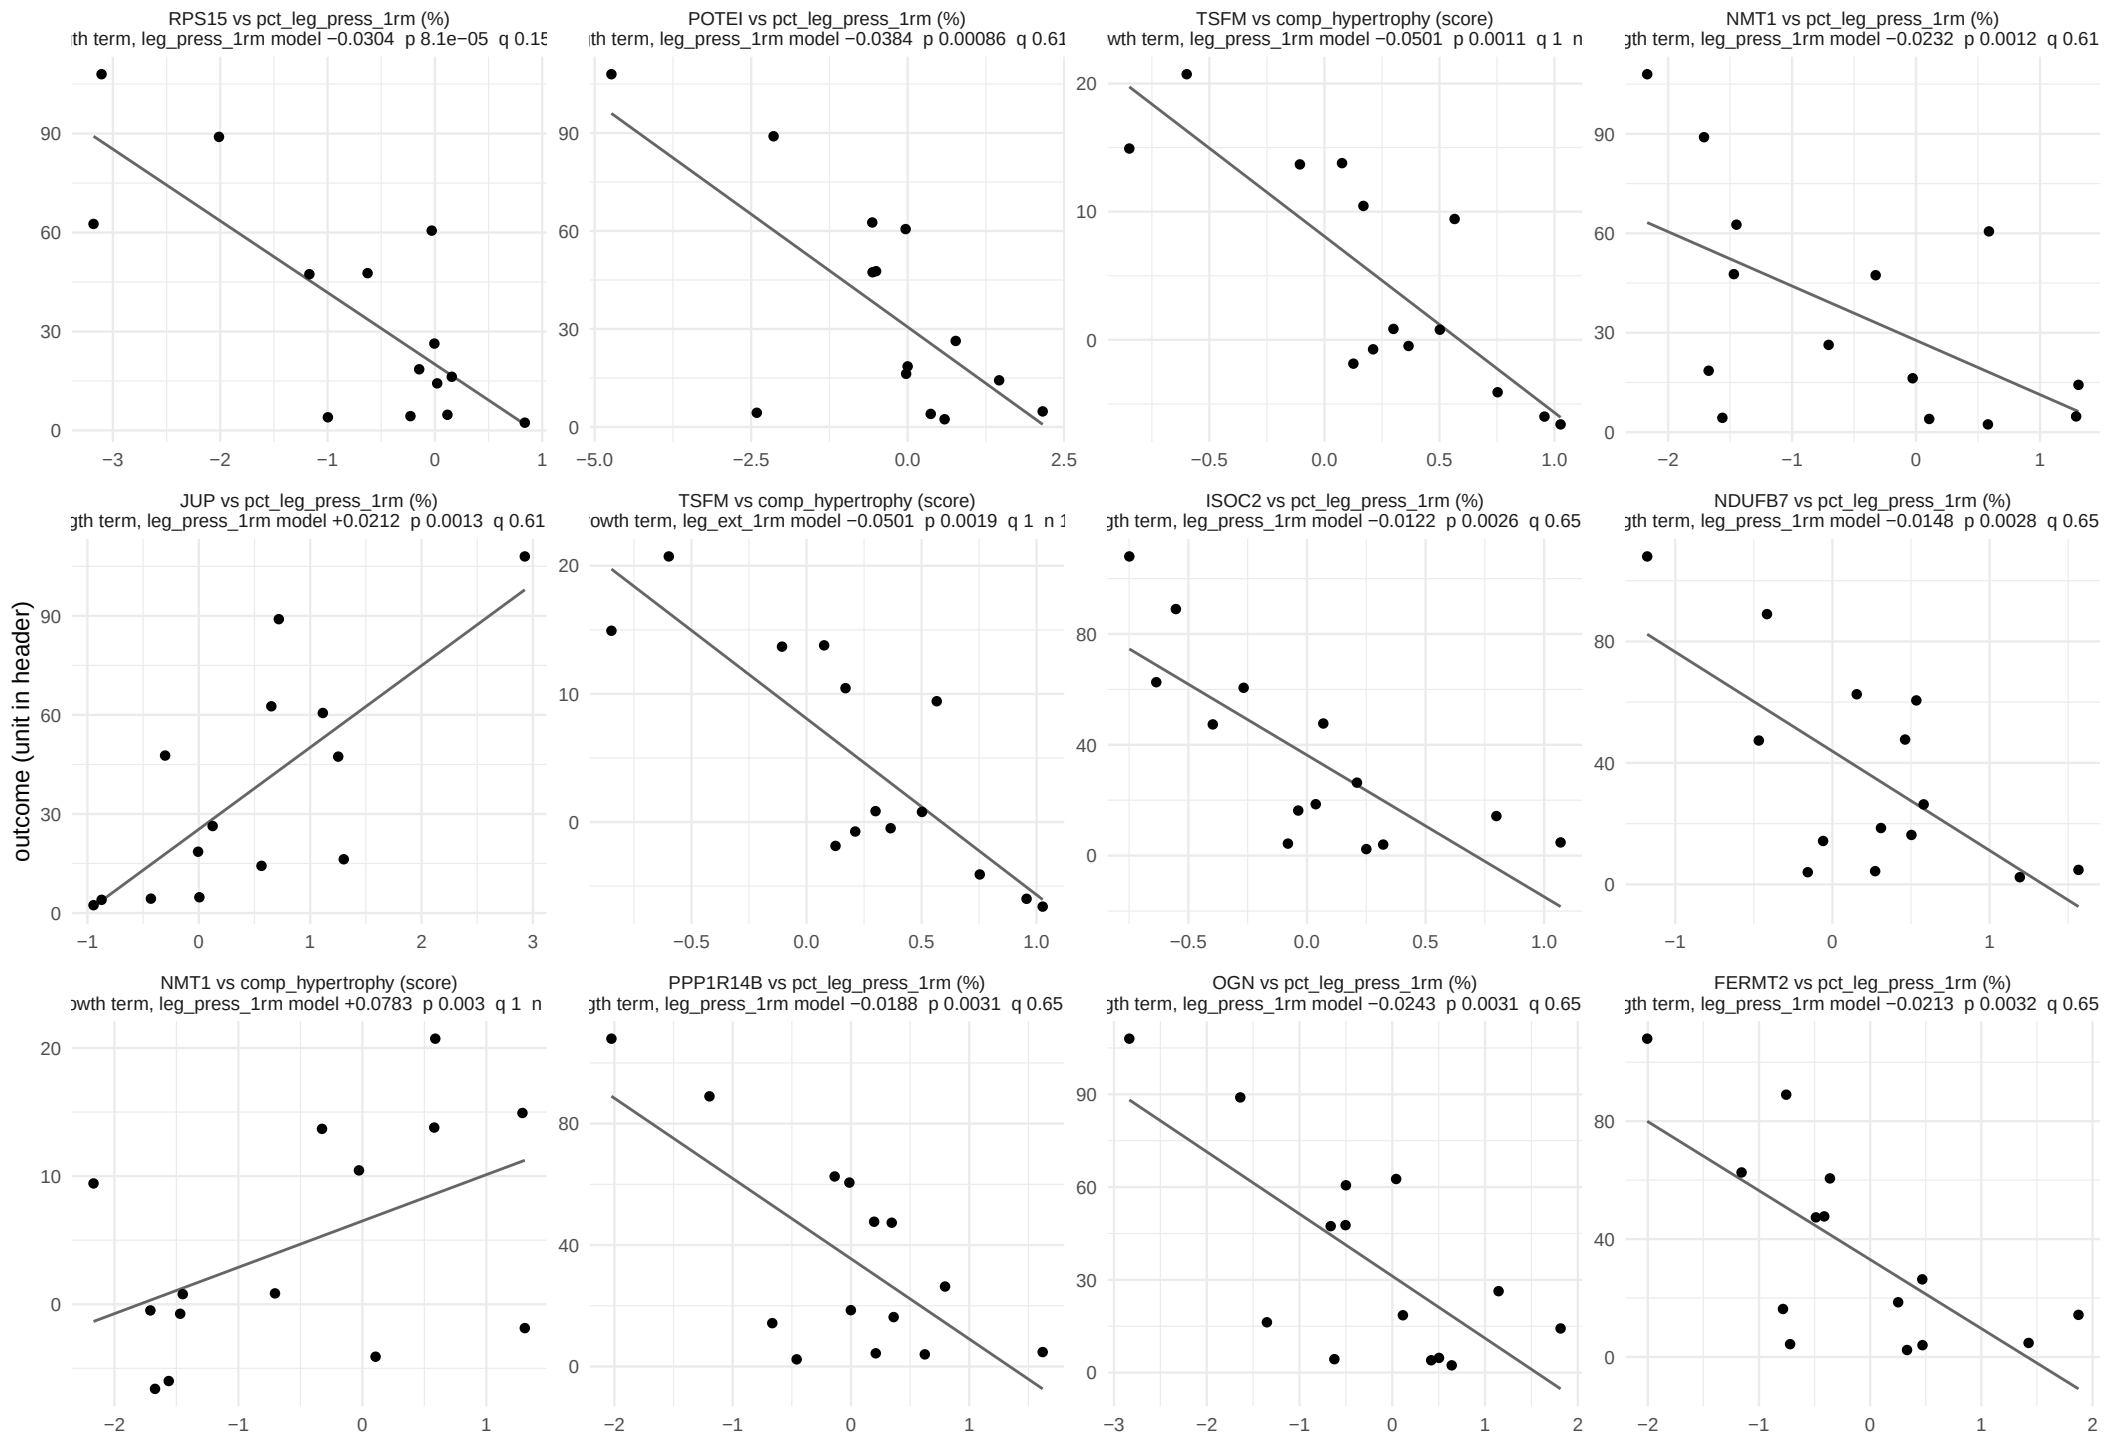

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/01_proteins.xlsx, two_predictor.

Two predictor, training window


288 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 2 of 24.

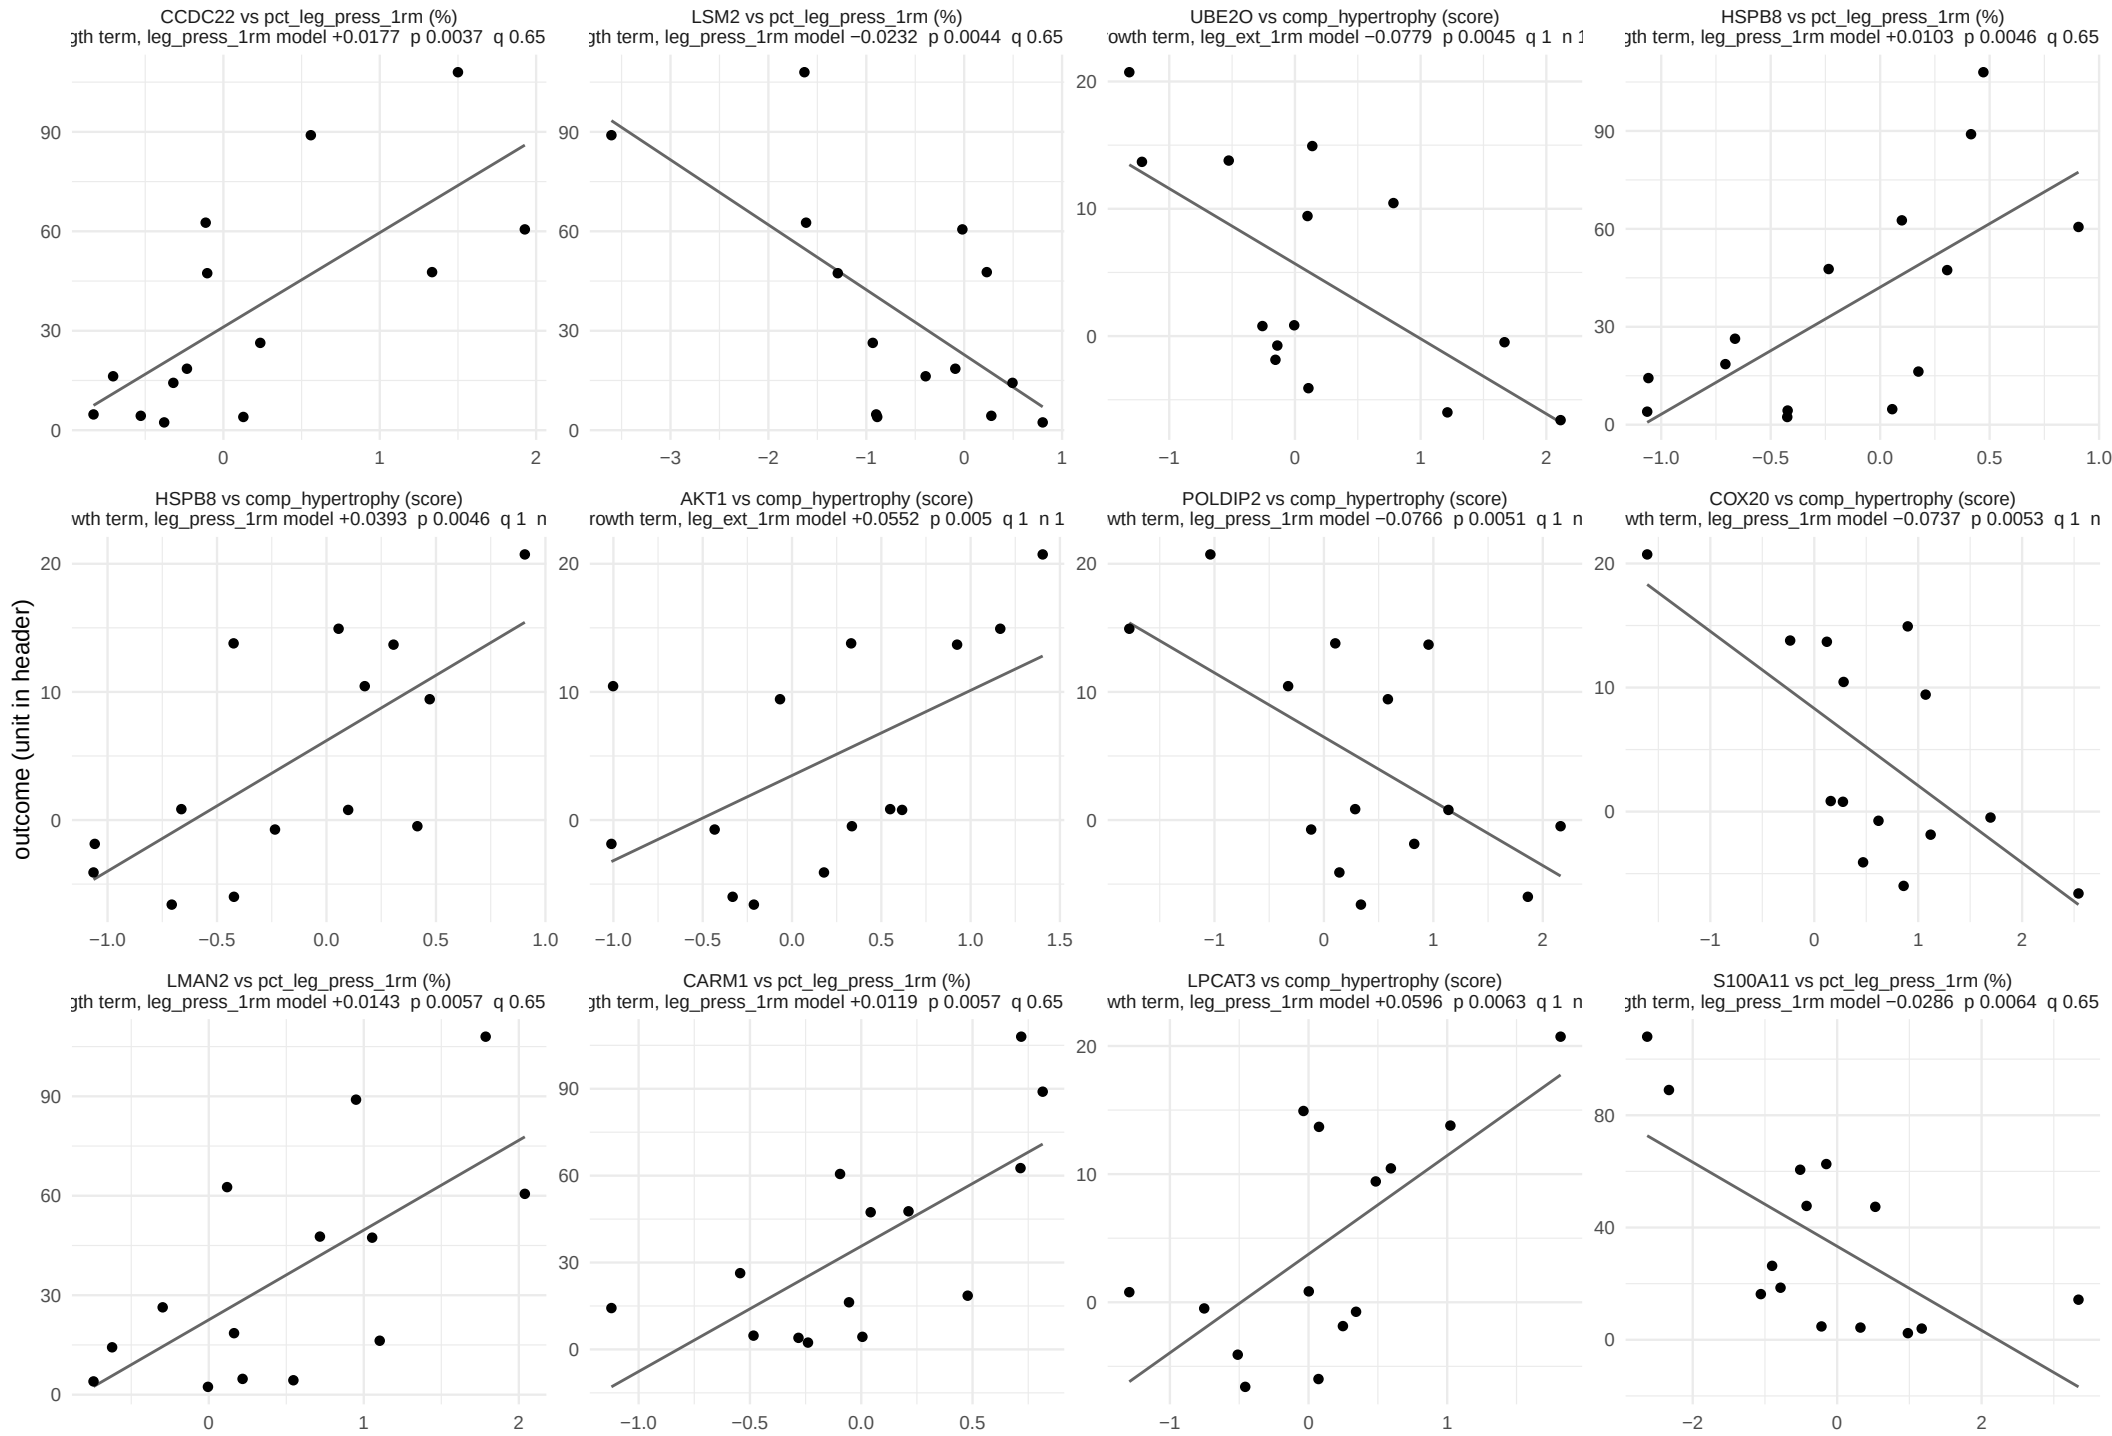

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/01_proteins.xlsx, two_predictor.

Two predictor, training window


288 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 3 of 24.

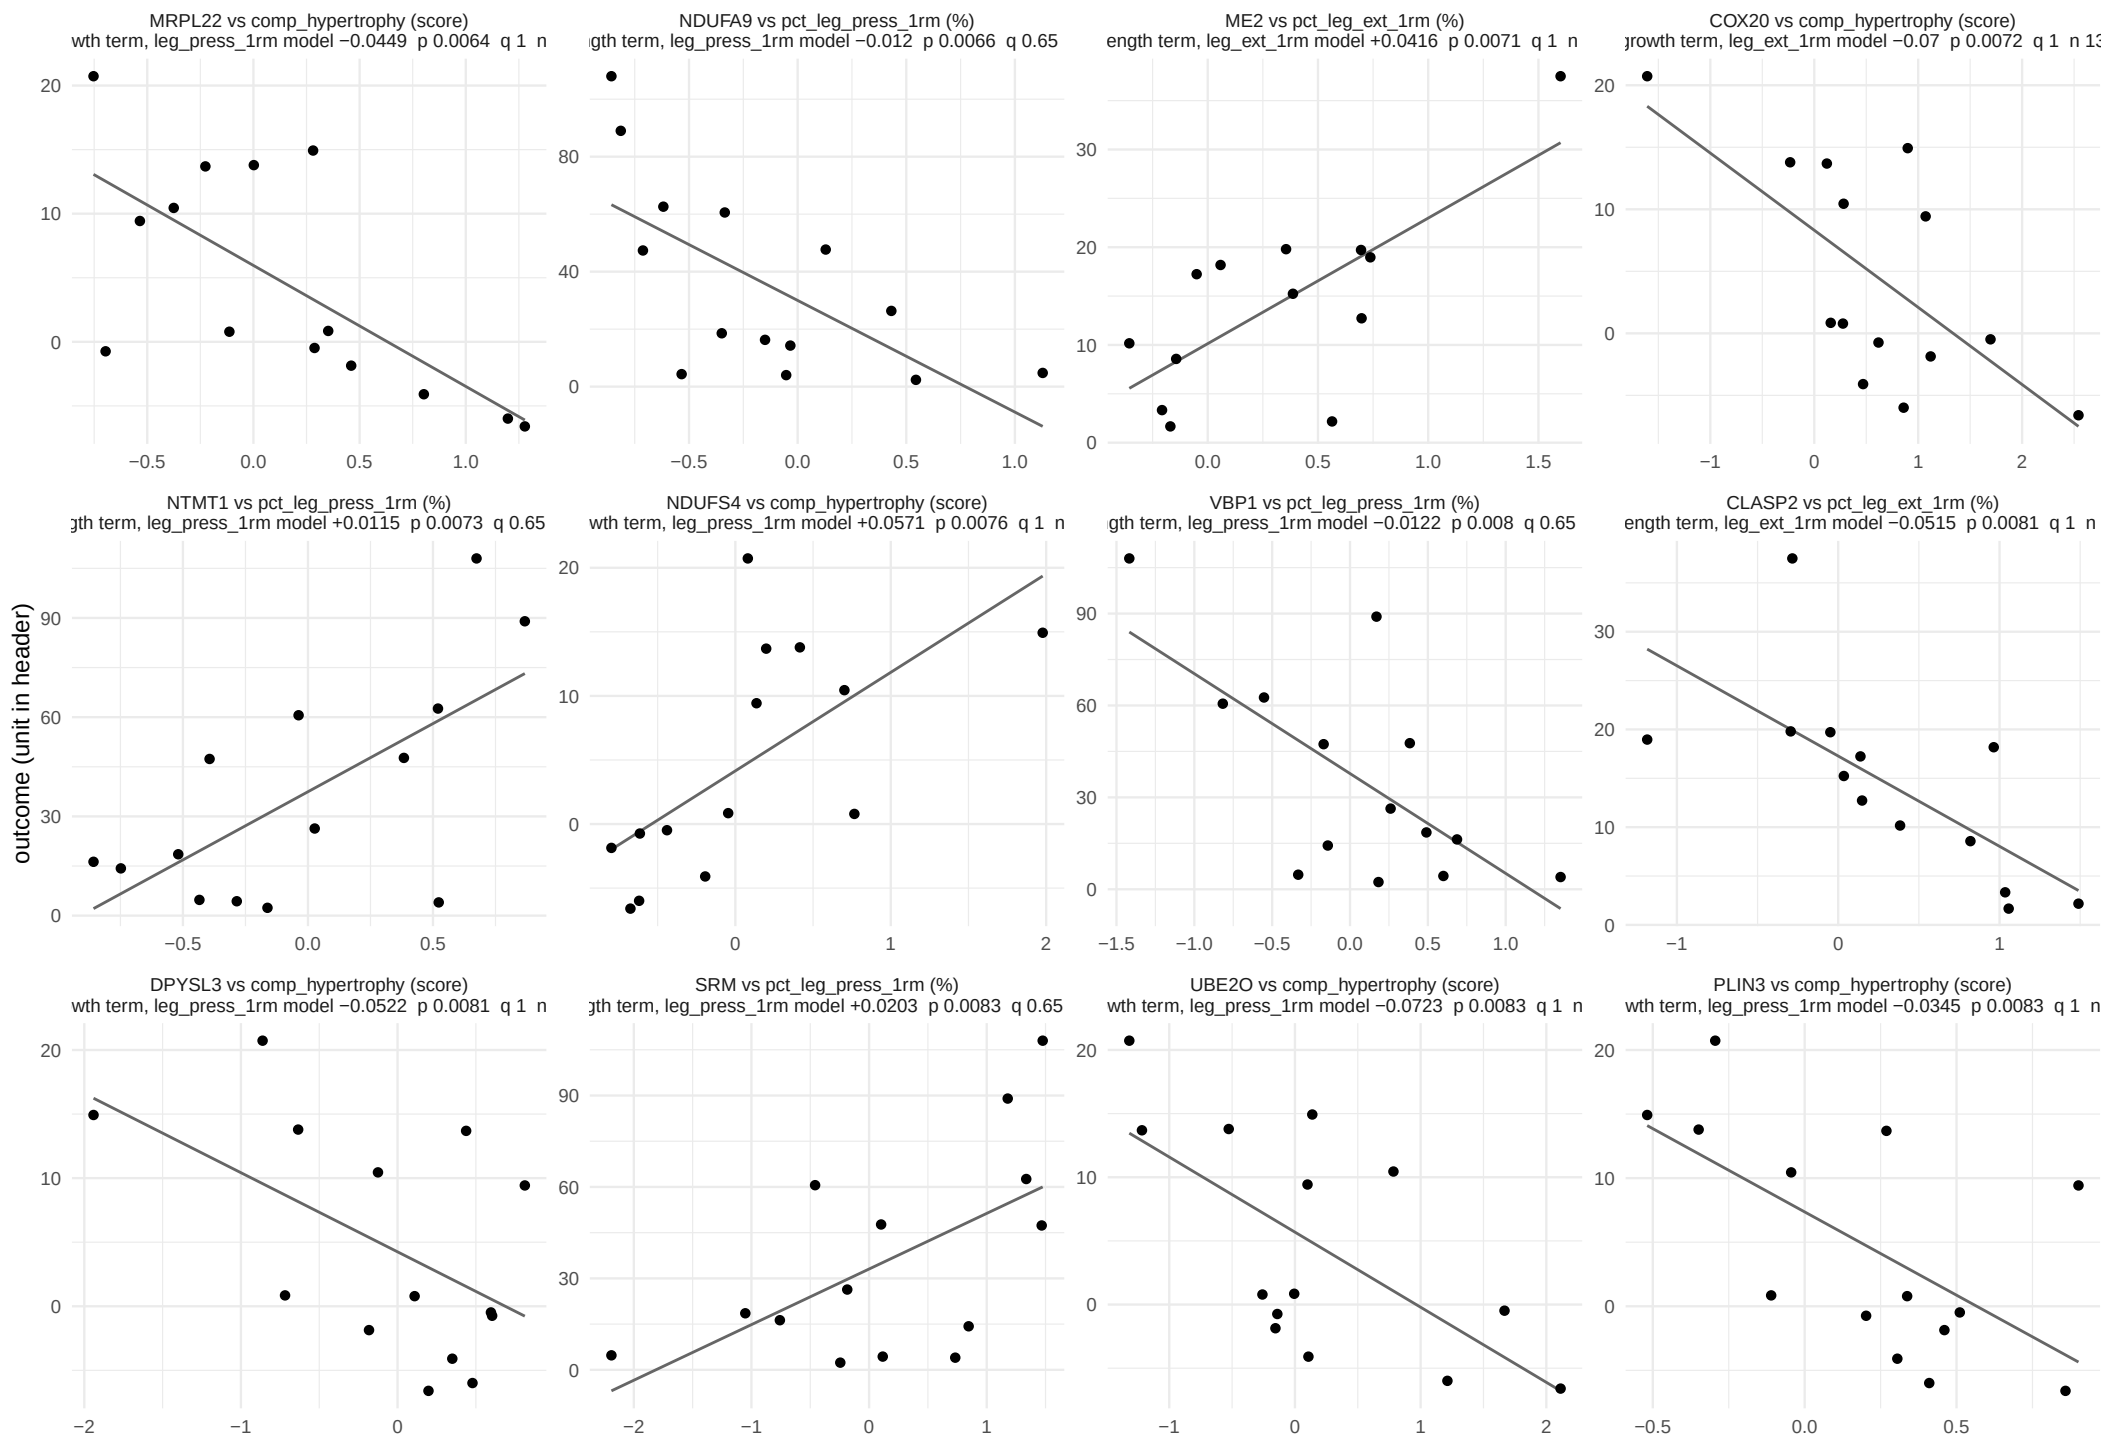

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/01_proteins.xlsx, two_predictor.

Two predictor, training window


288 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 4 of 24.

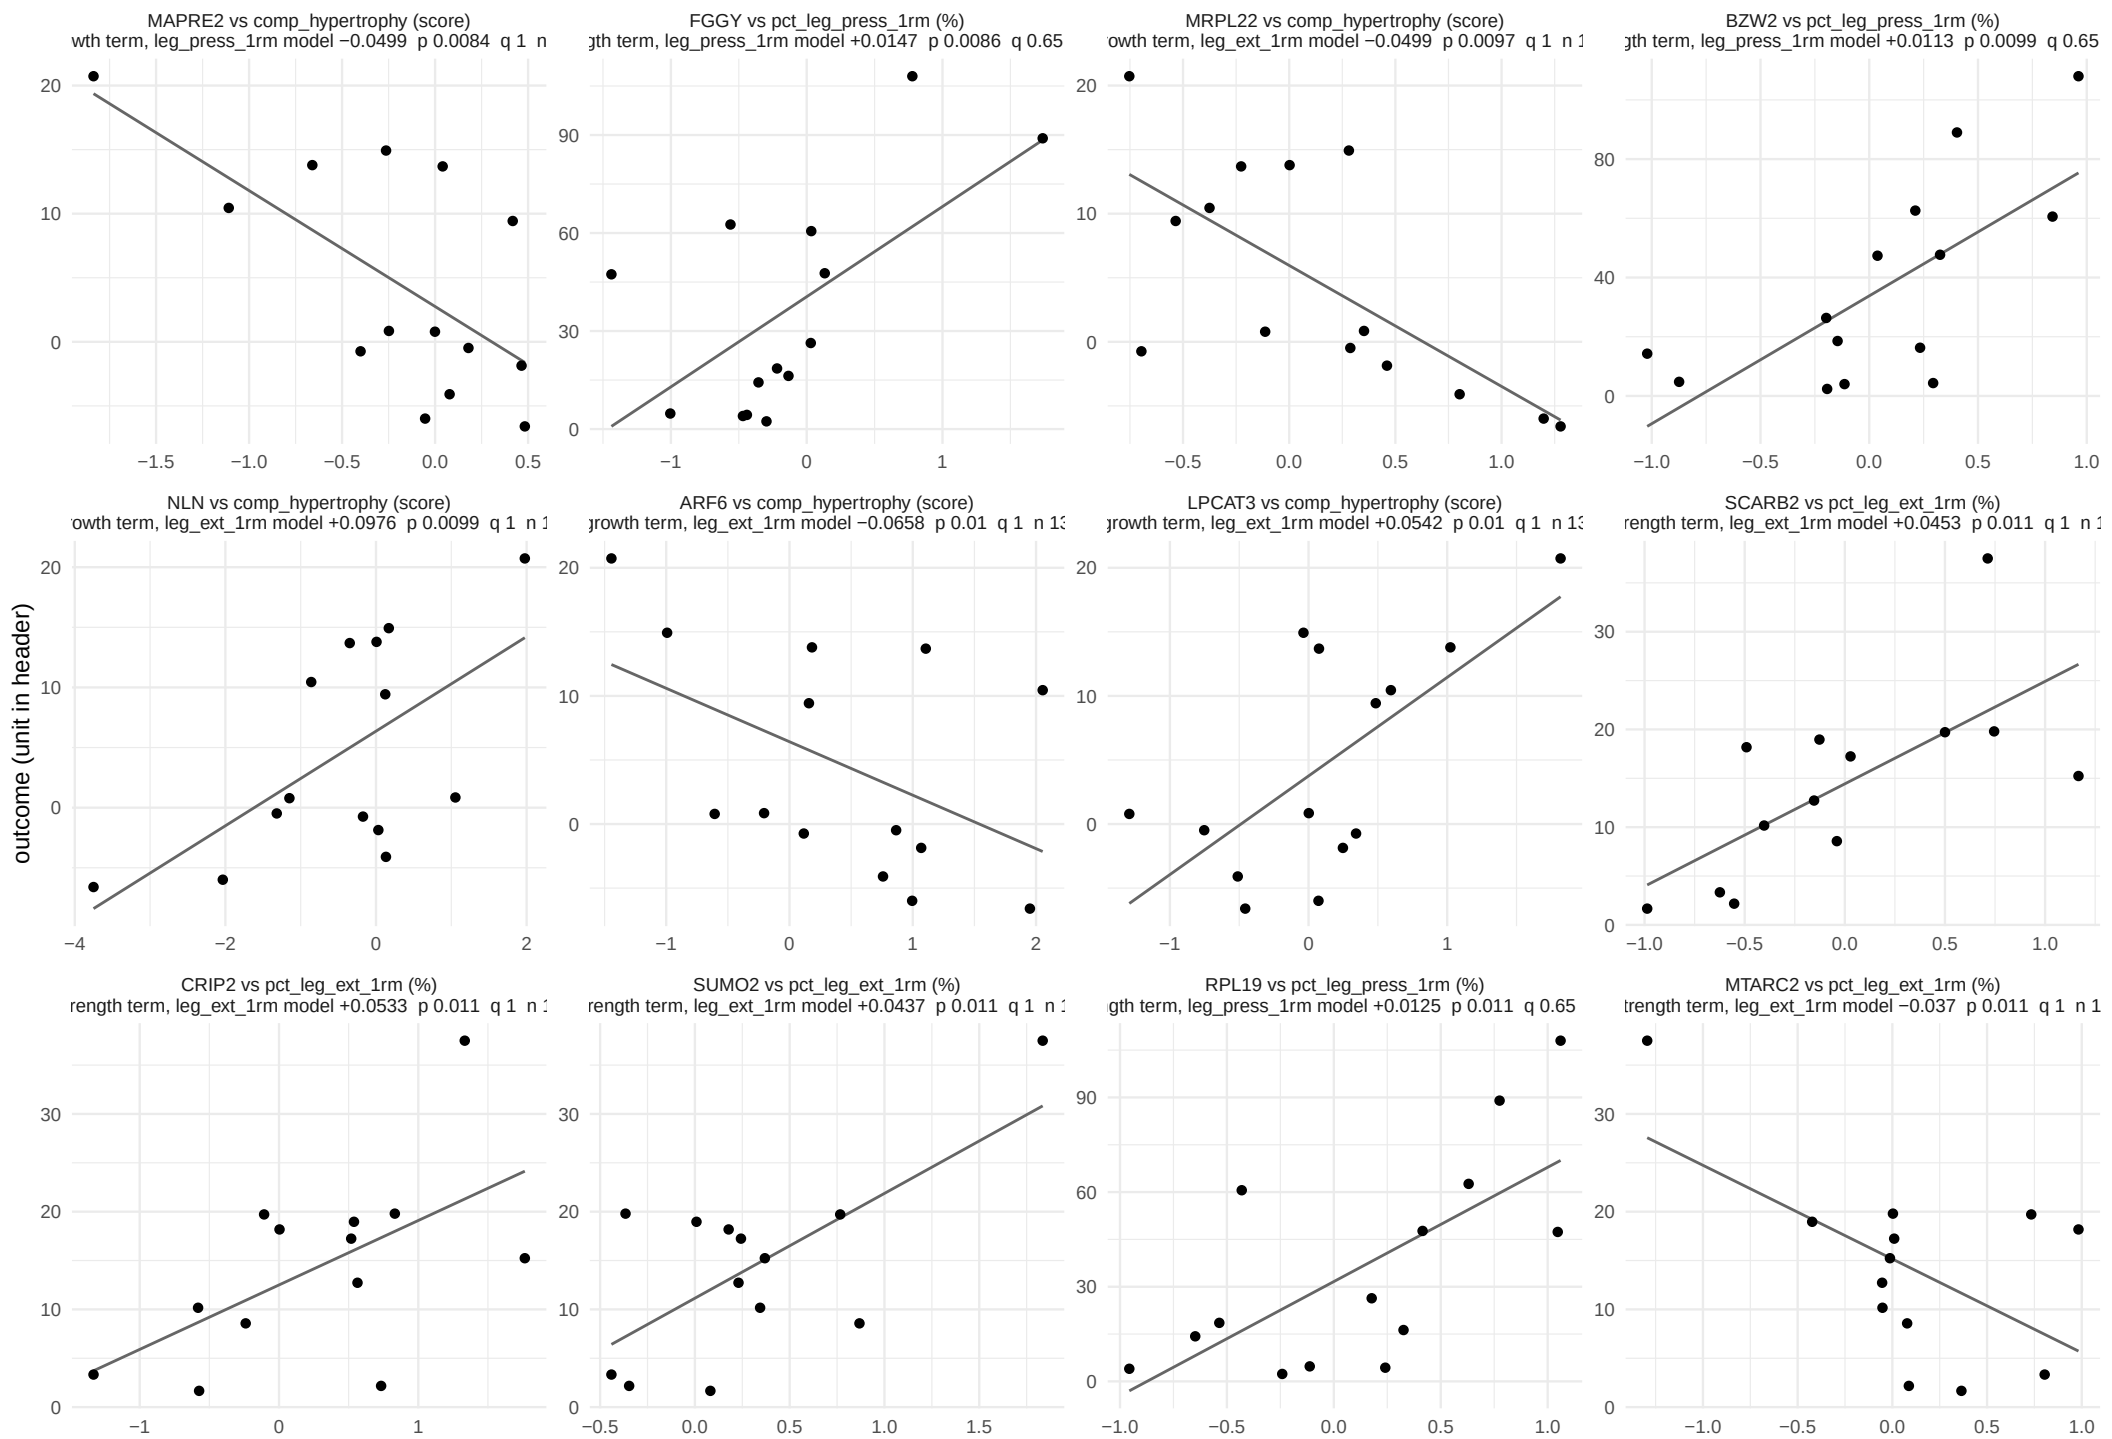

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/01_proteins.xlsx, two_predictor.

Two predictor, training window


288 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 5 of 24.

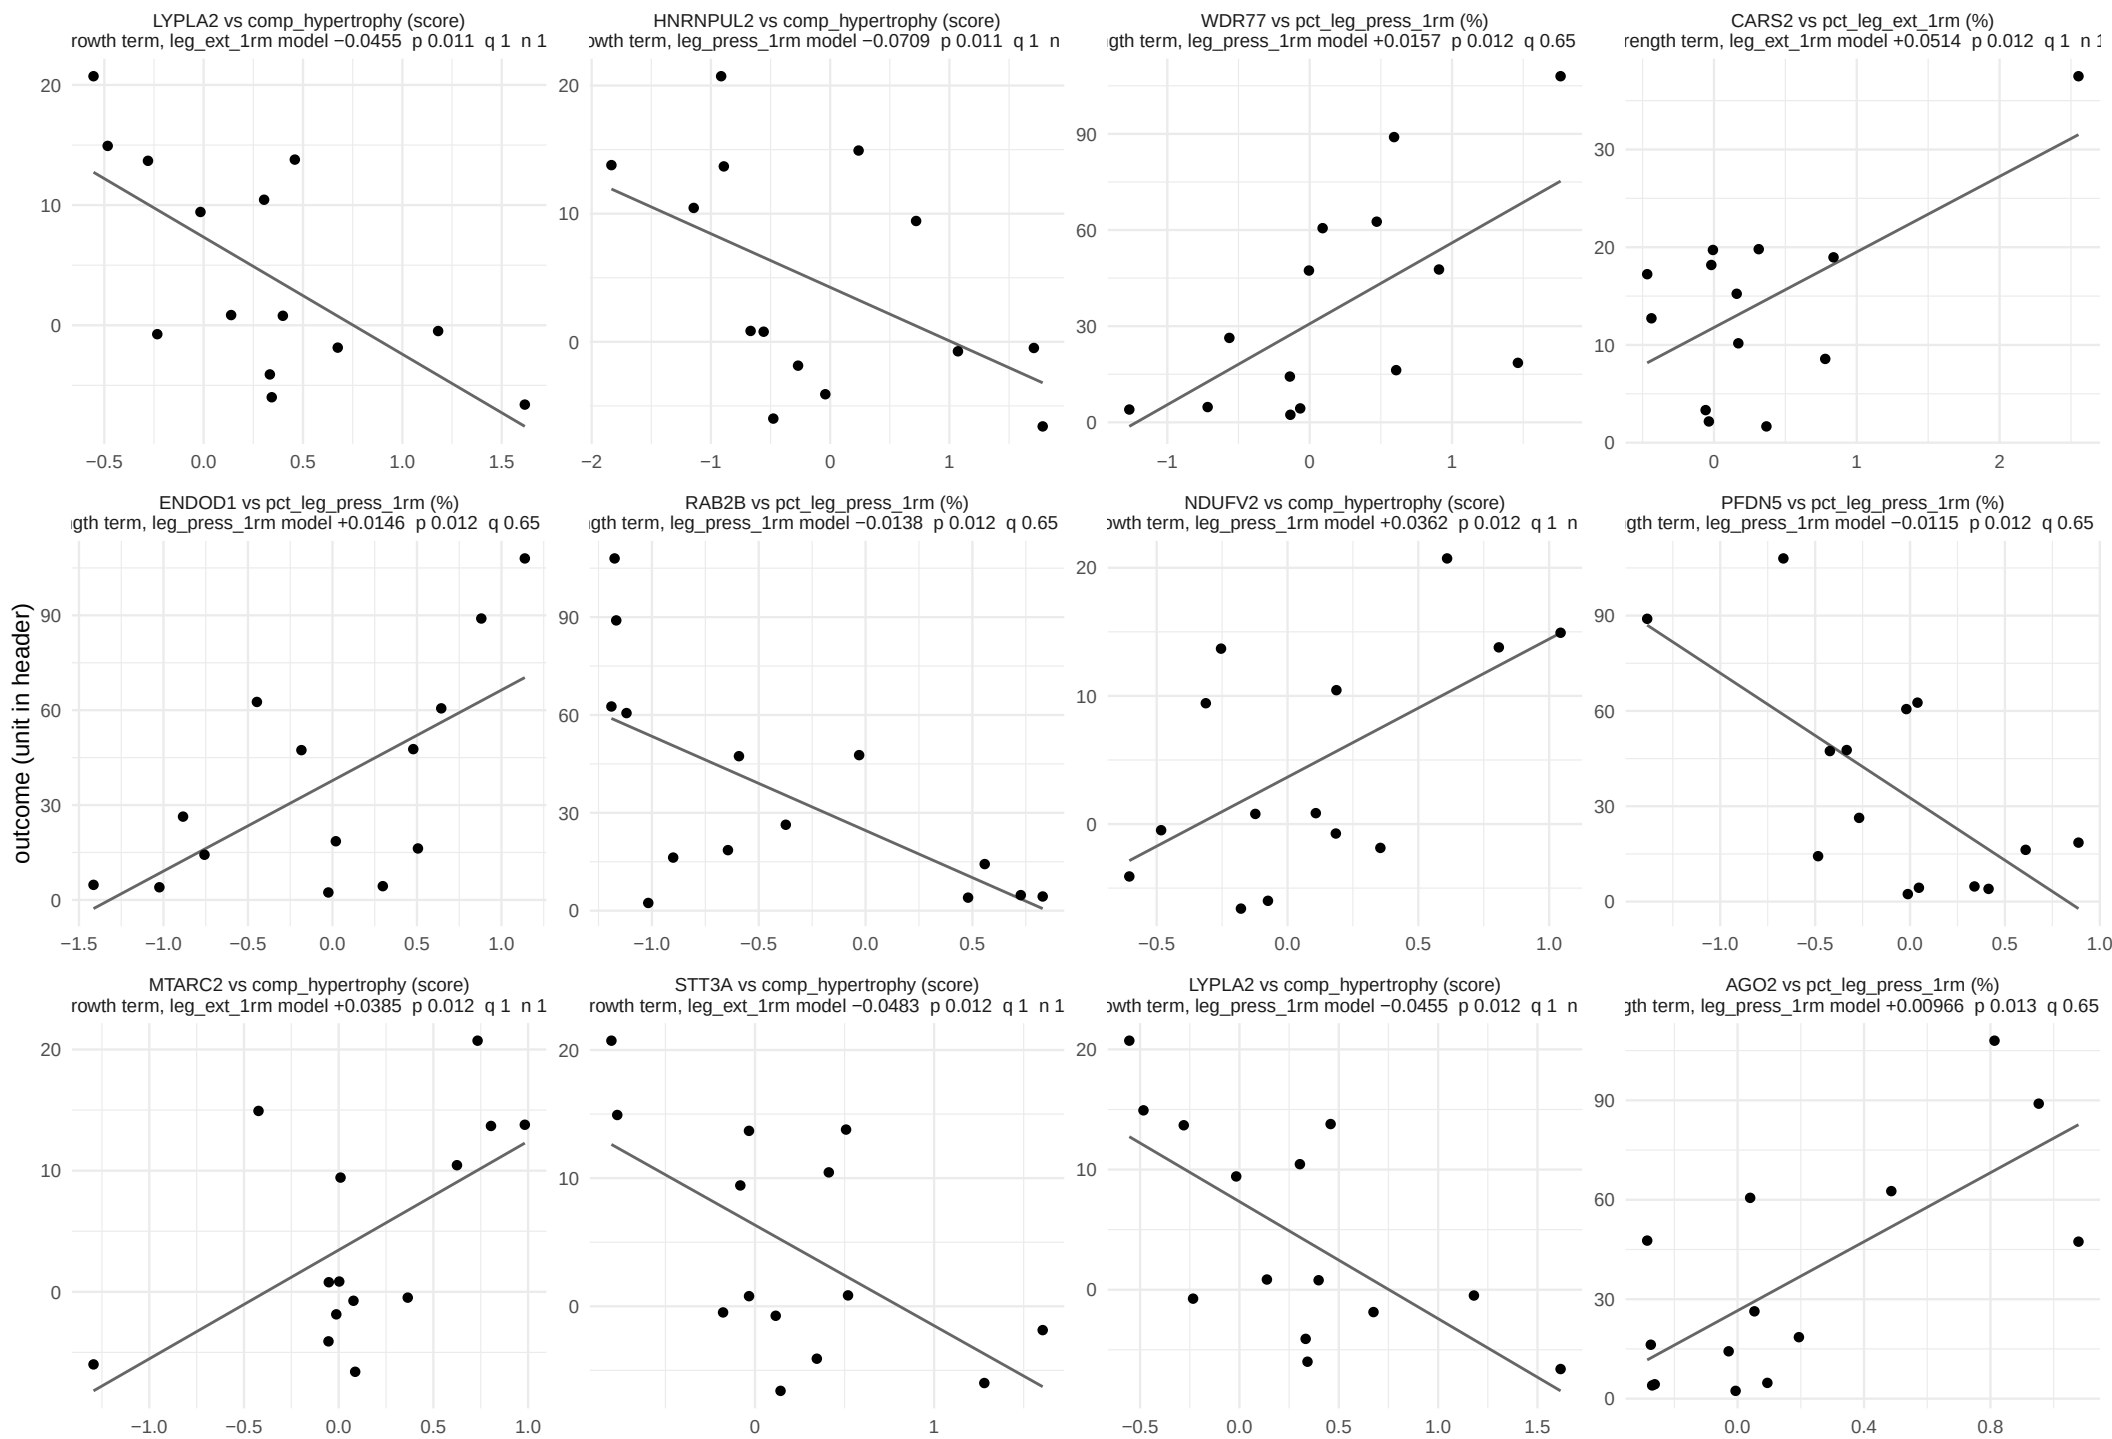

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/01_proteins.xlsx, two_predictor.

Two predictor, training window


288 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 6 of 24.

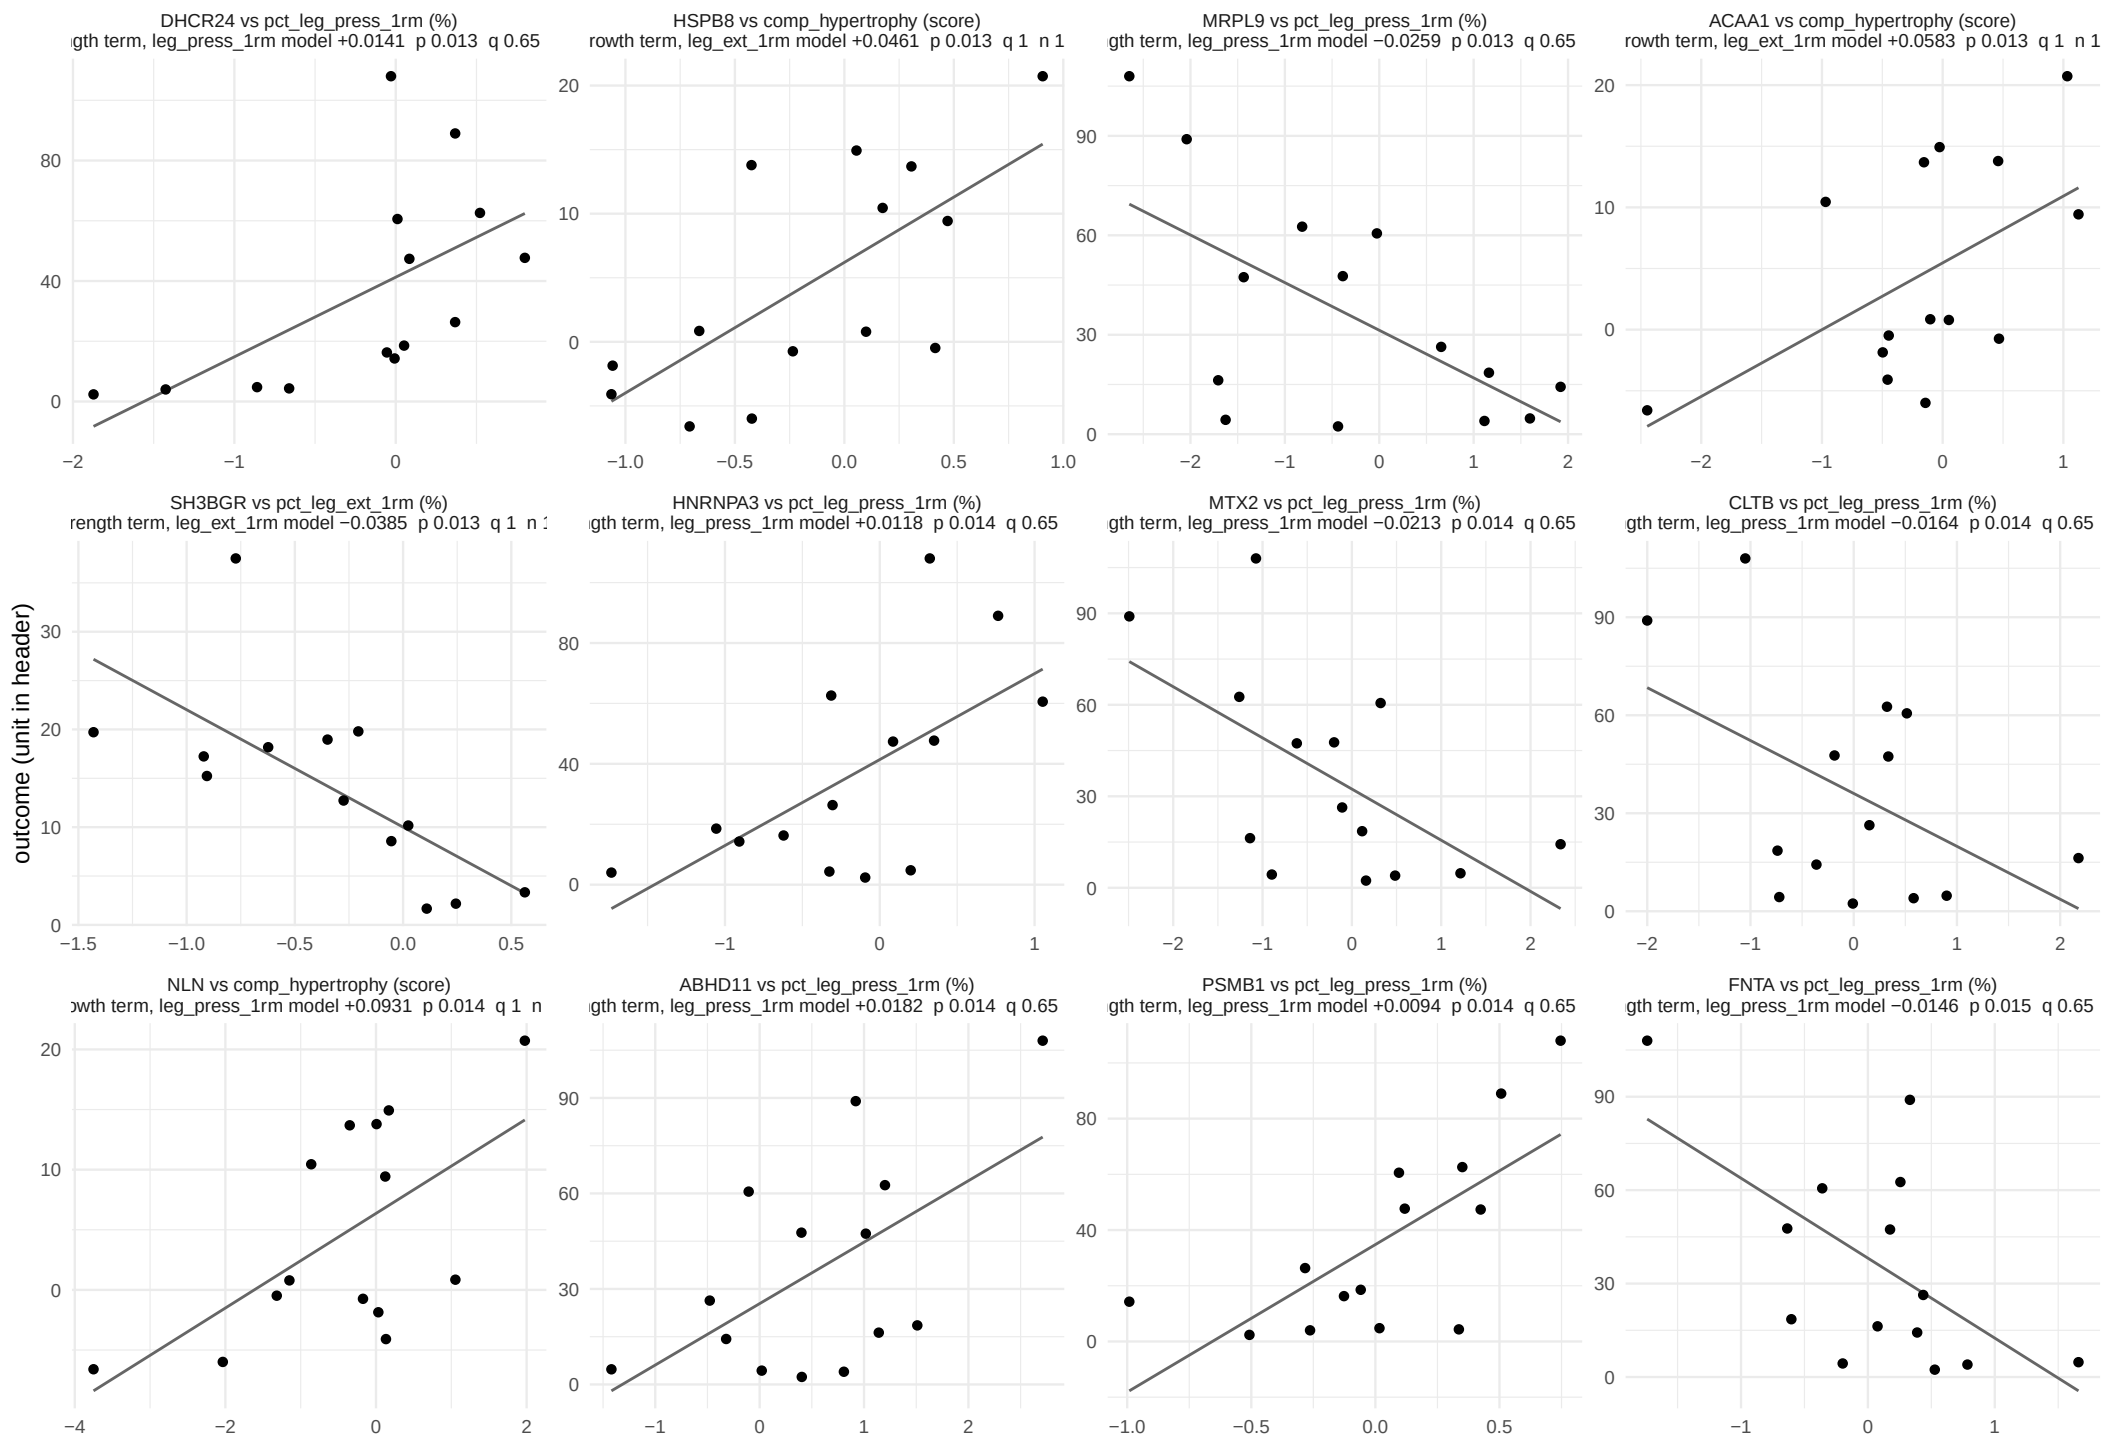

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/01_proteins.xlsx, two_predictor.

Two predictor, training window


288 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 7 of 24.

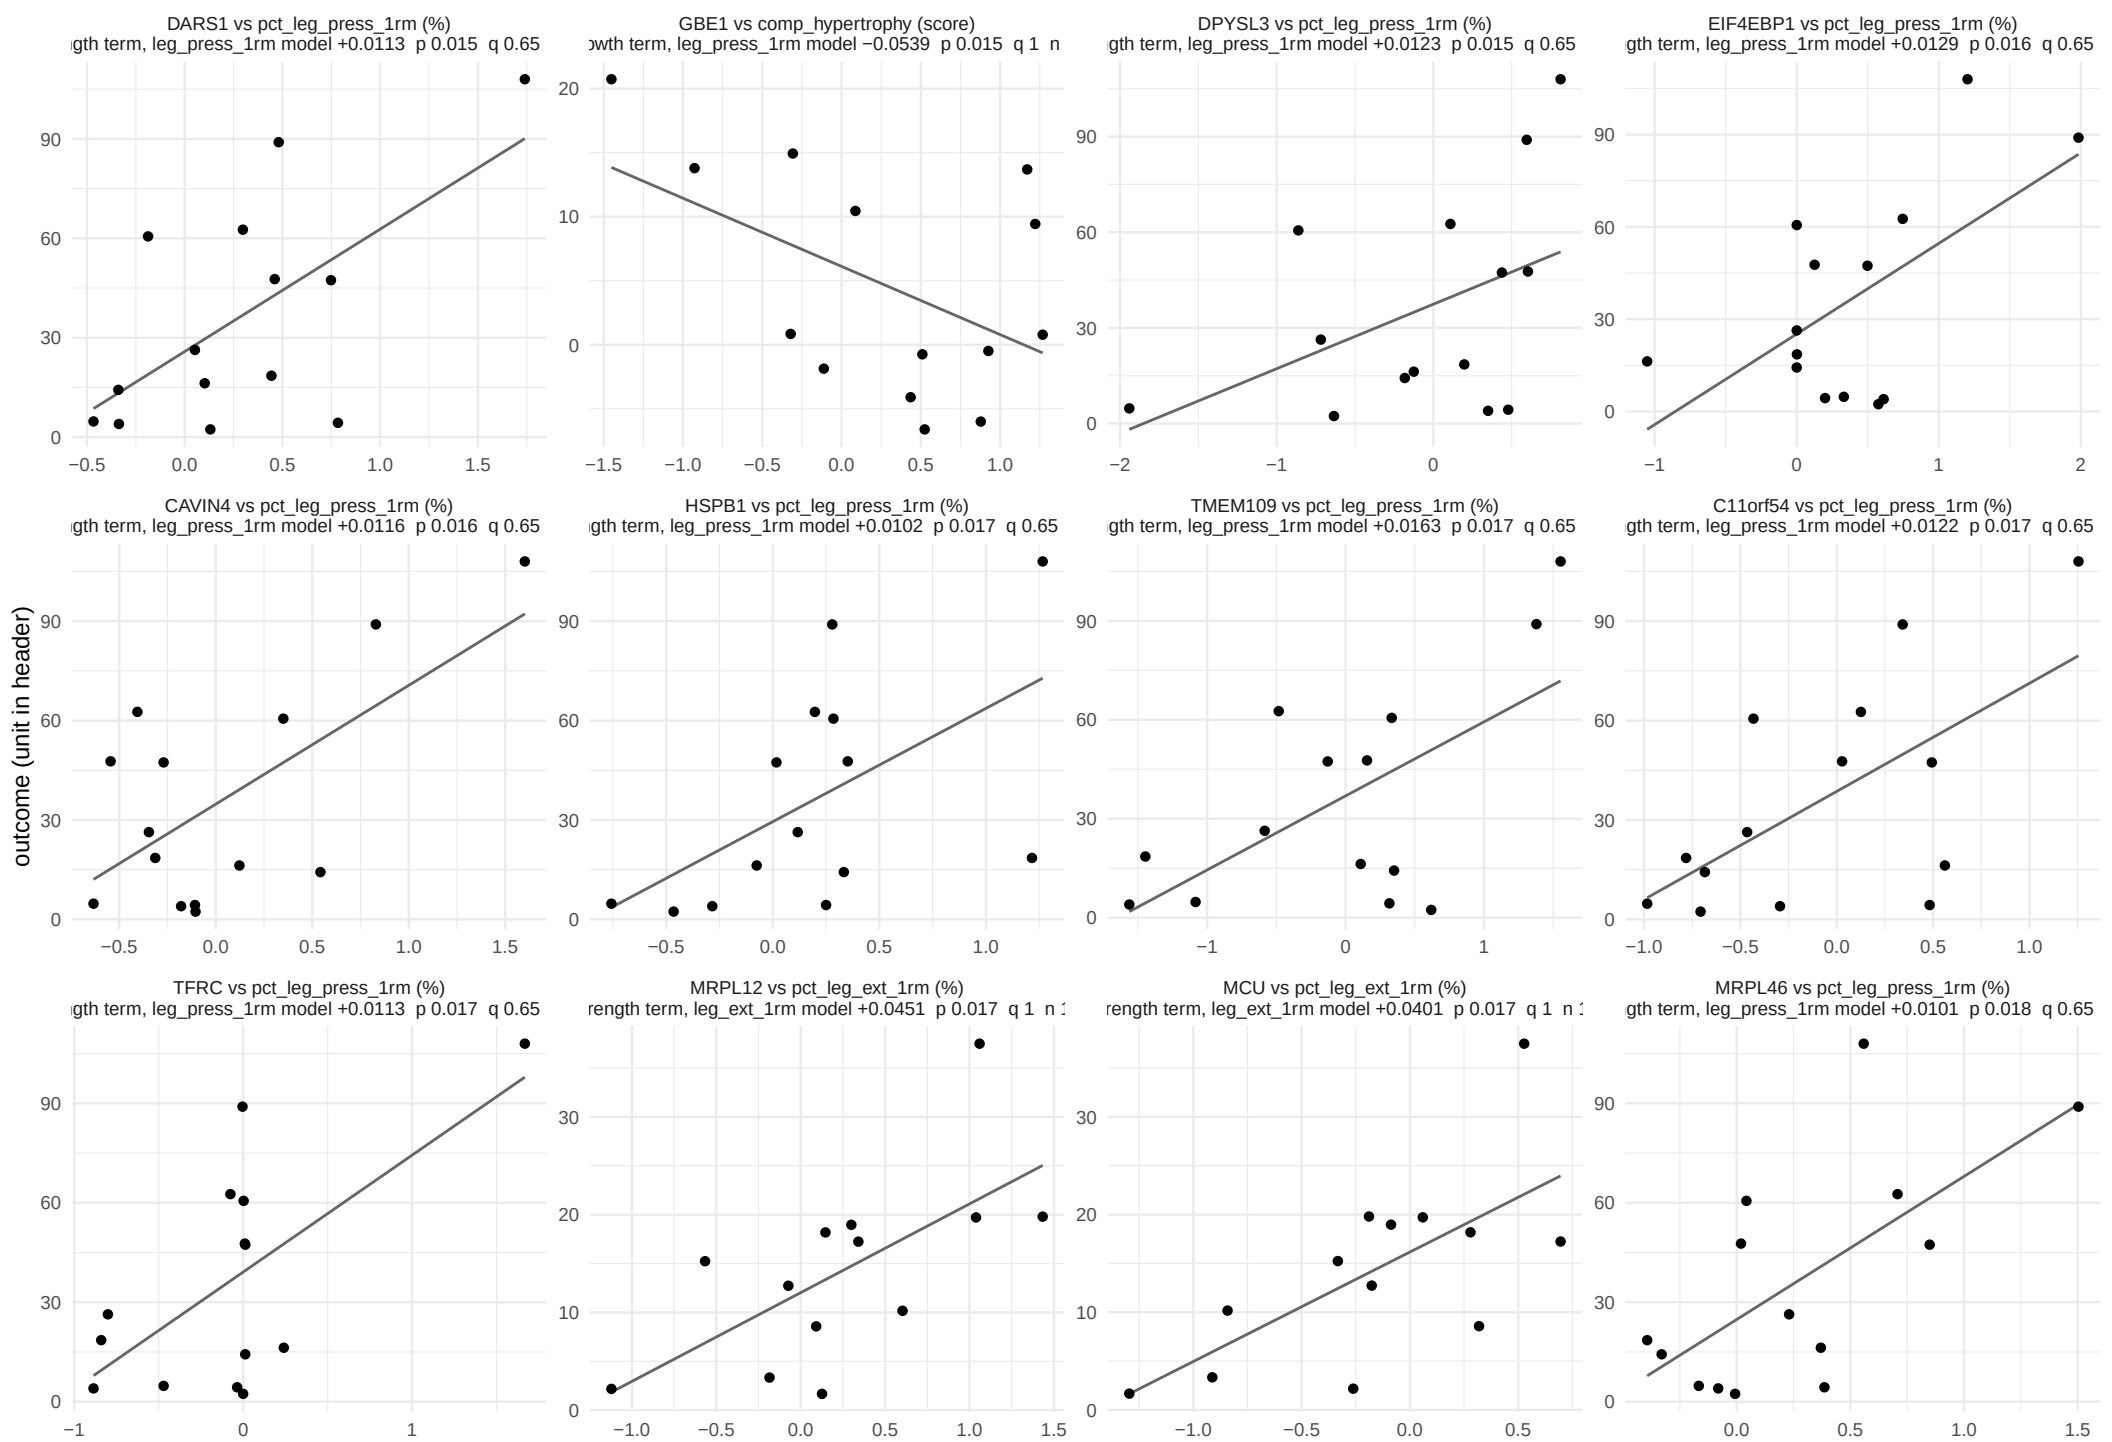

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/01_proteins.xlsx, two_predictor.

Two predictor, training window


288 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 8 of 24.

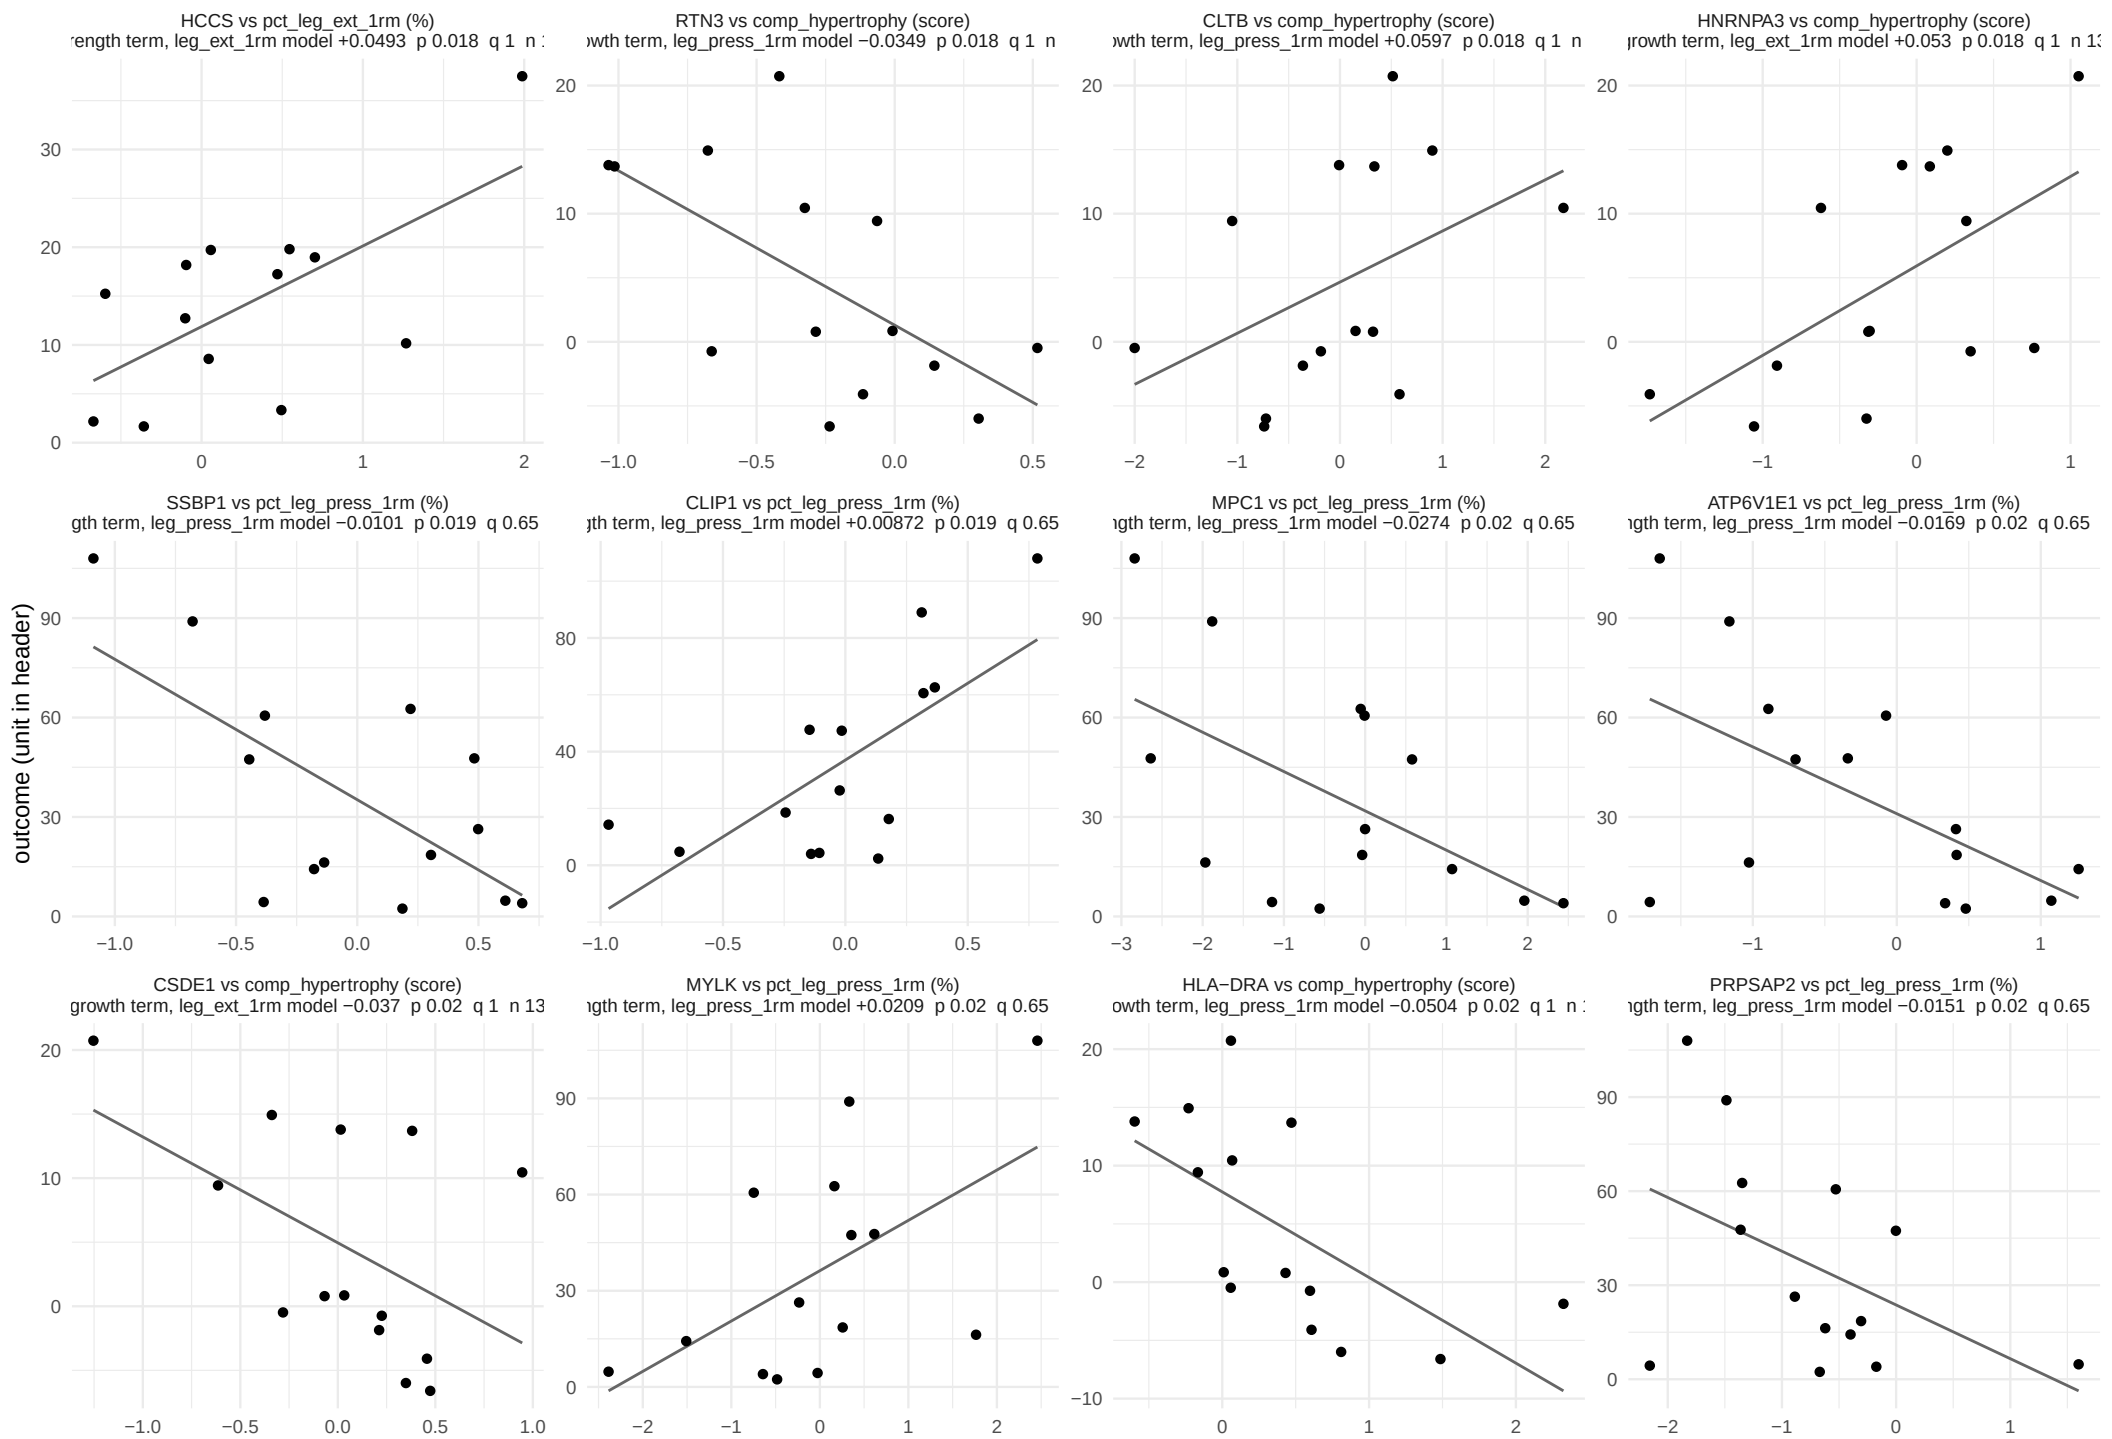

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/01_proteins.xlsx, two_predictor.

Two predictor, training window


288 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 9 of 24.

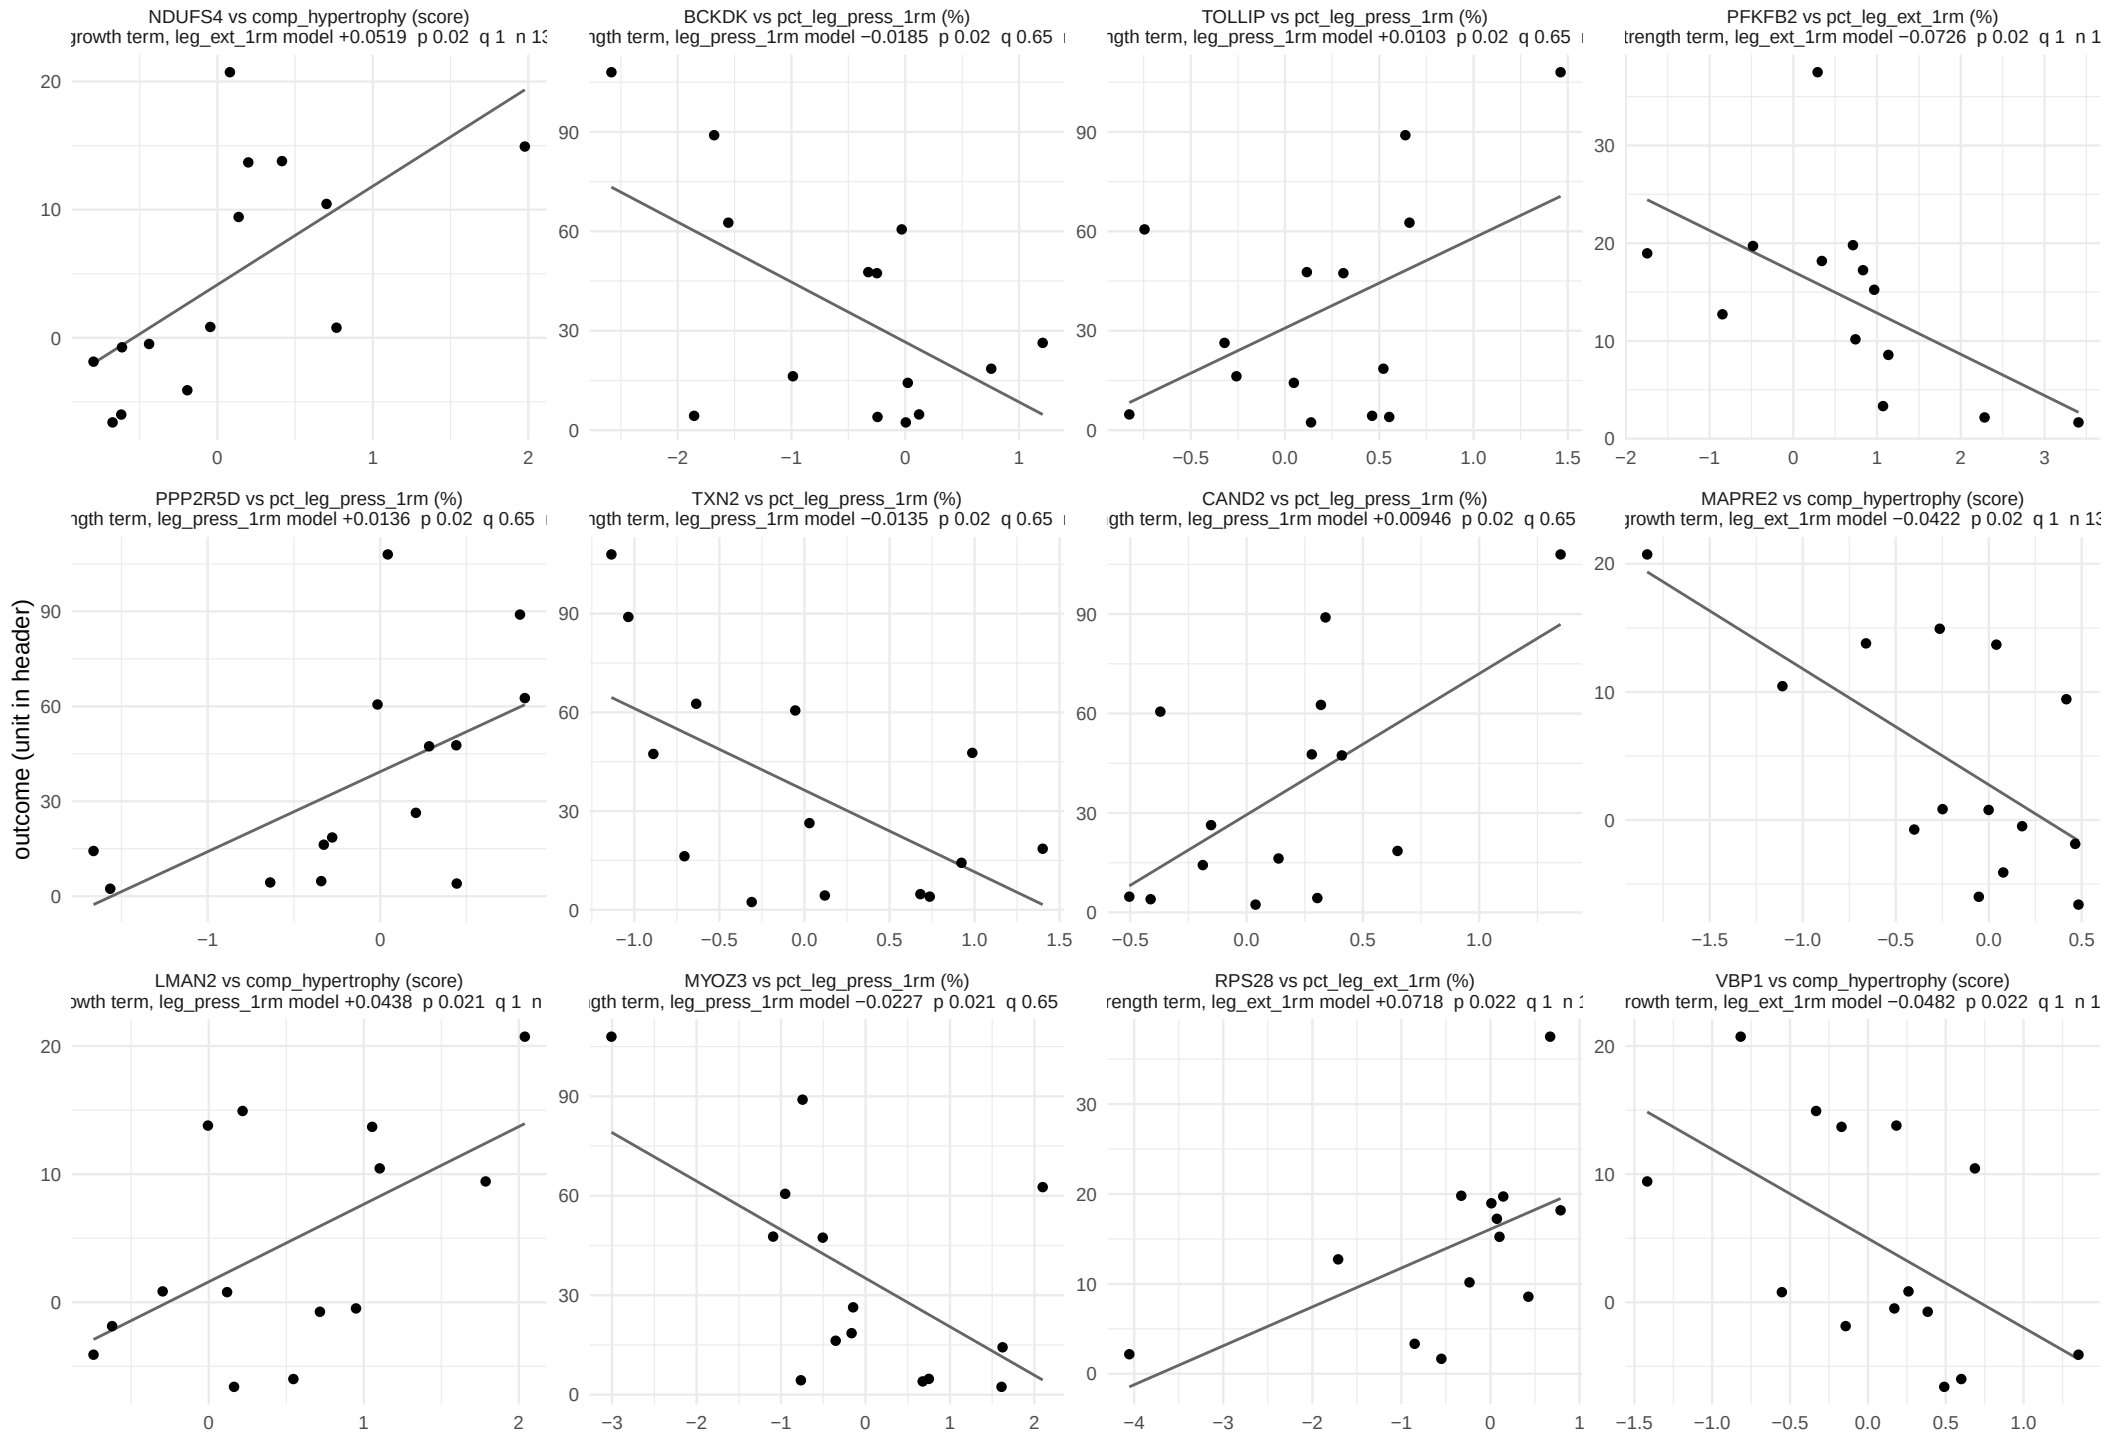

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/01_proteins.xlsx, two_predictor.

Two predictor, training window


288 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 10 of 24.

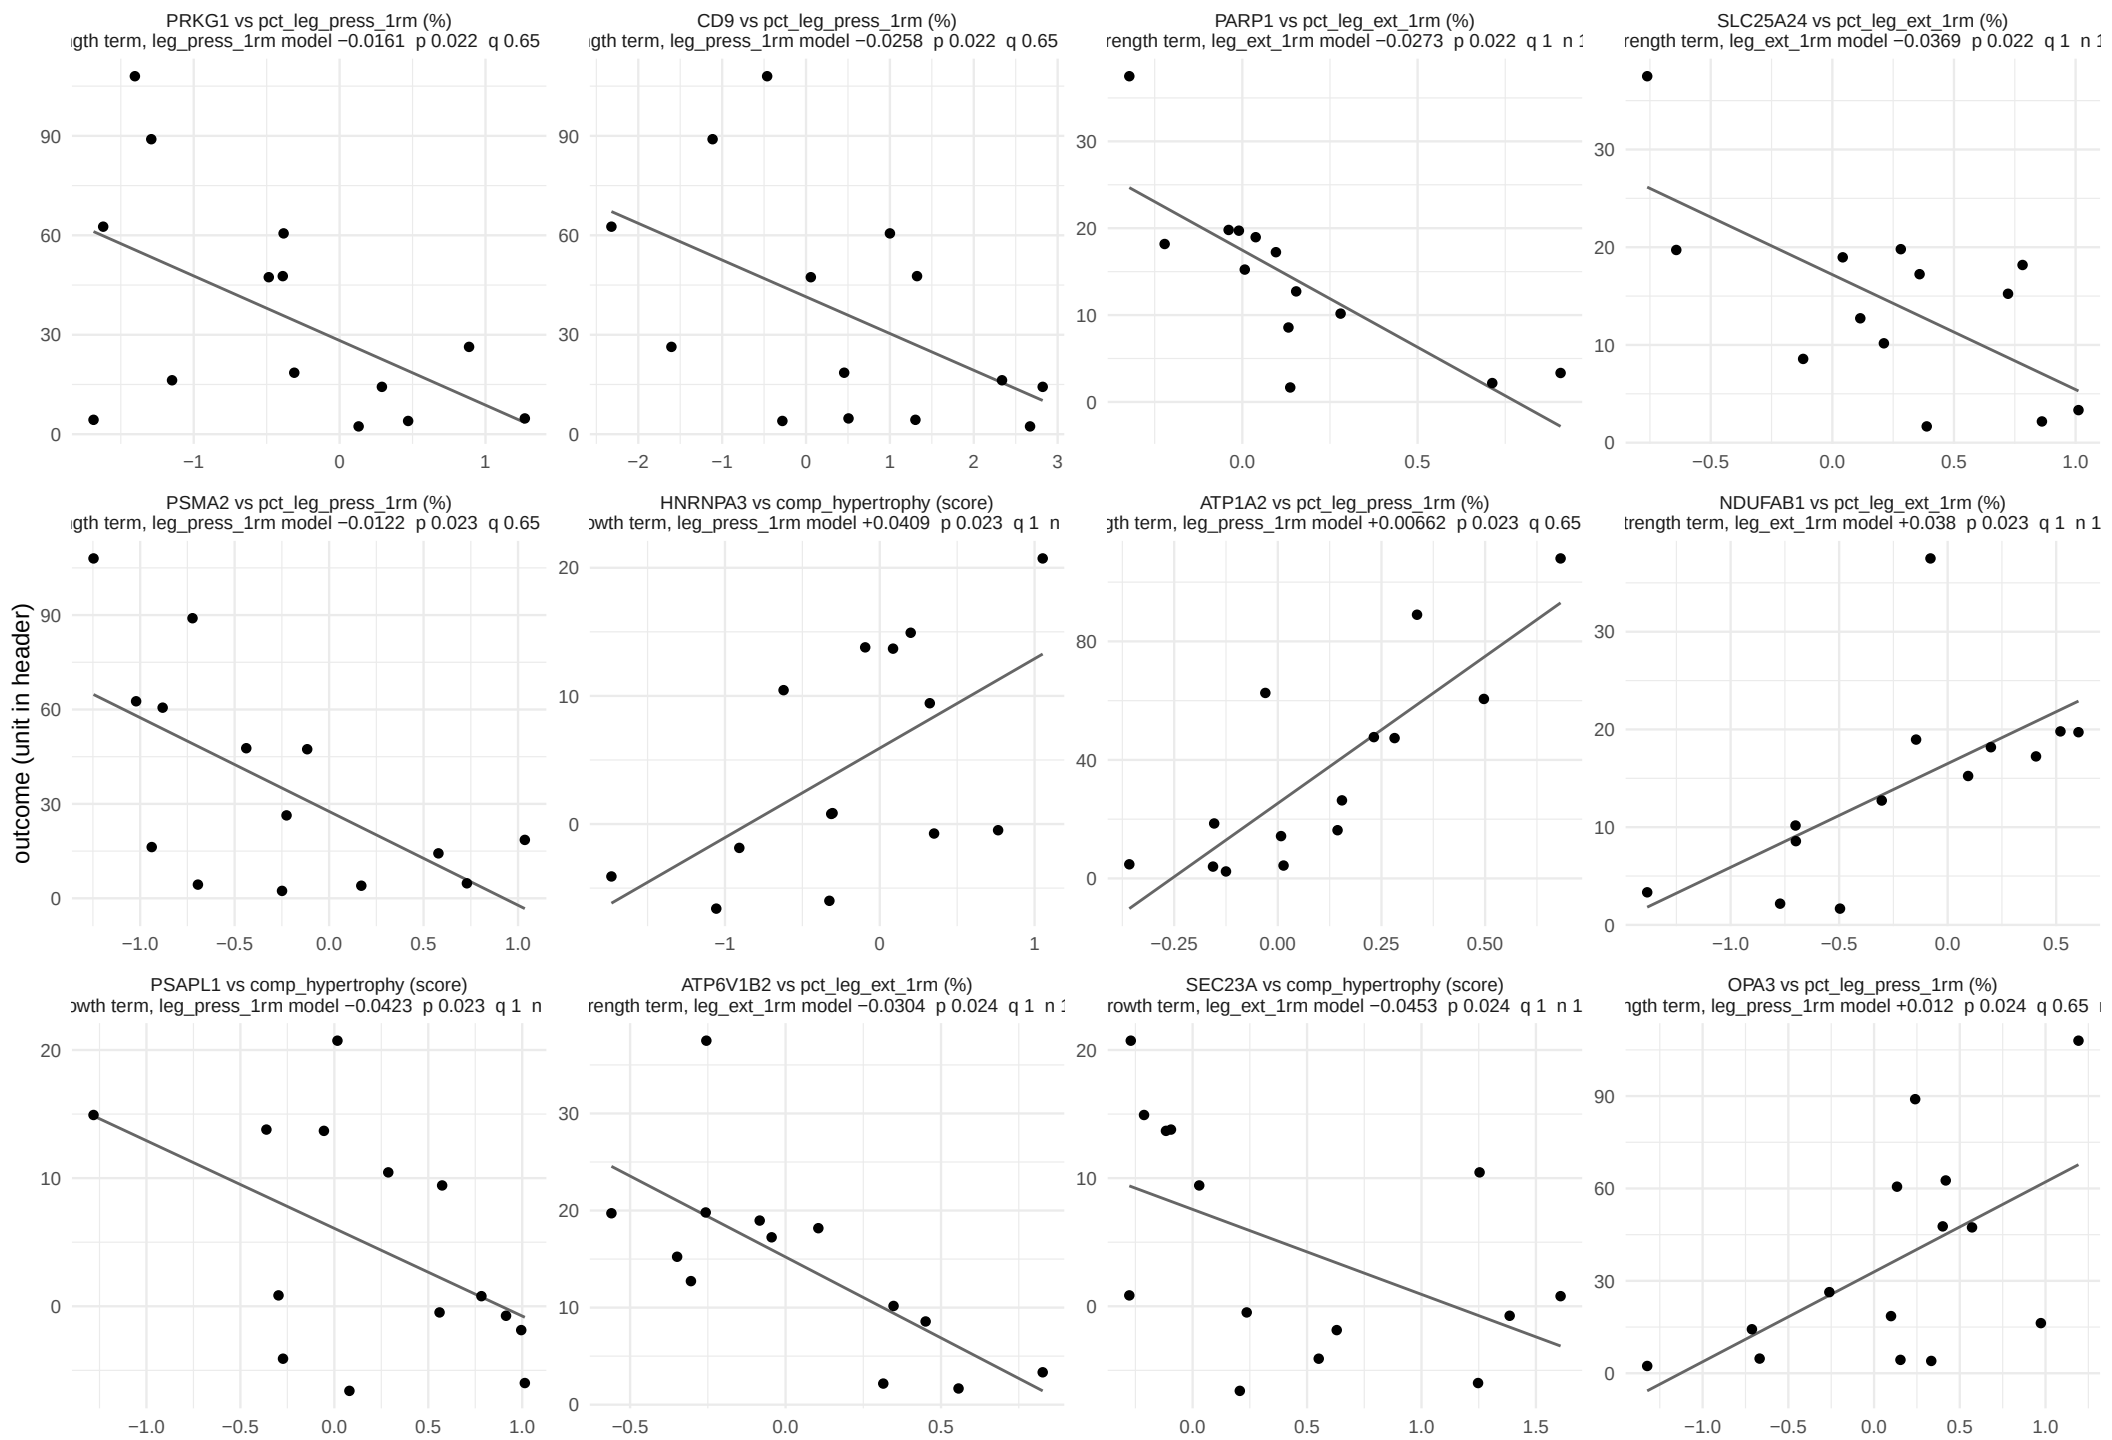

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/01_proteins.xlsx, two_predictor.

Two predictor, training window


288 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 11 of 24.

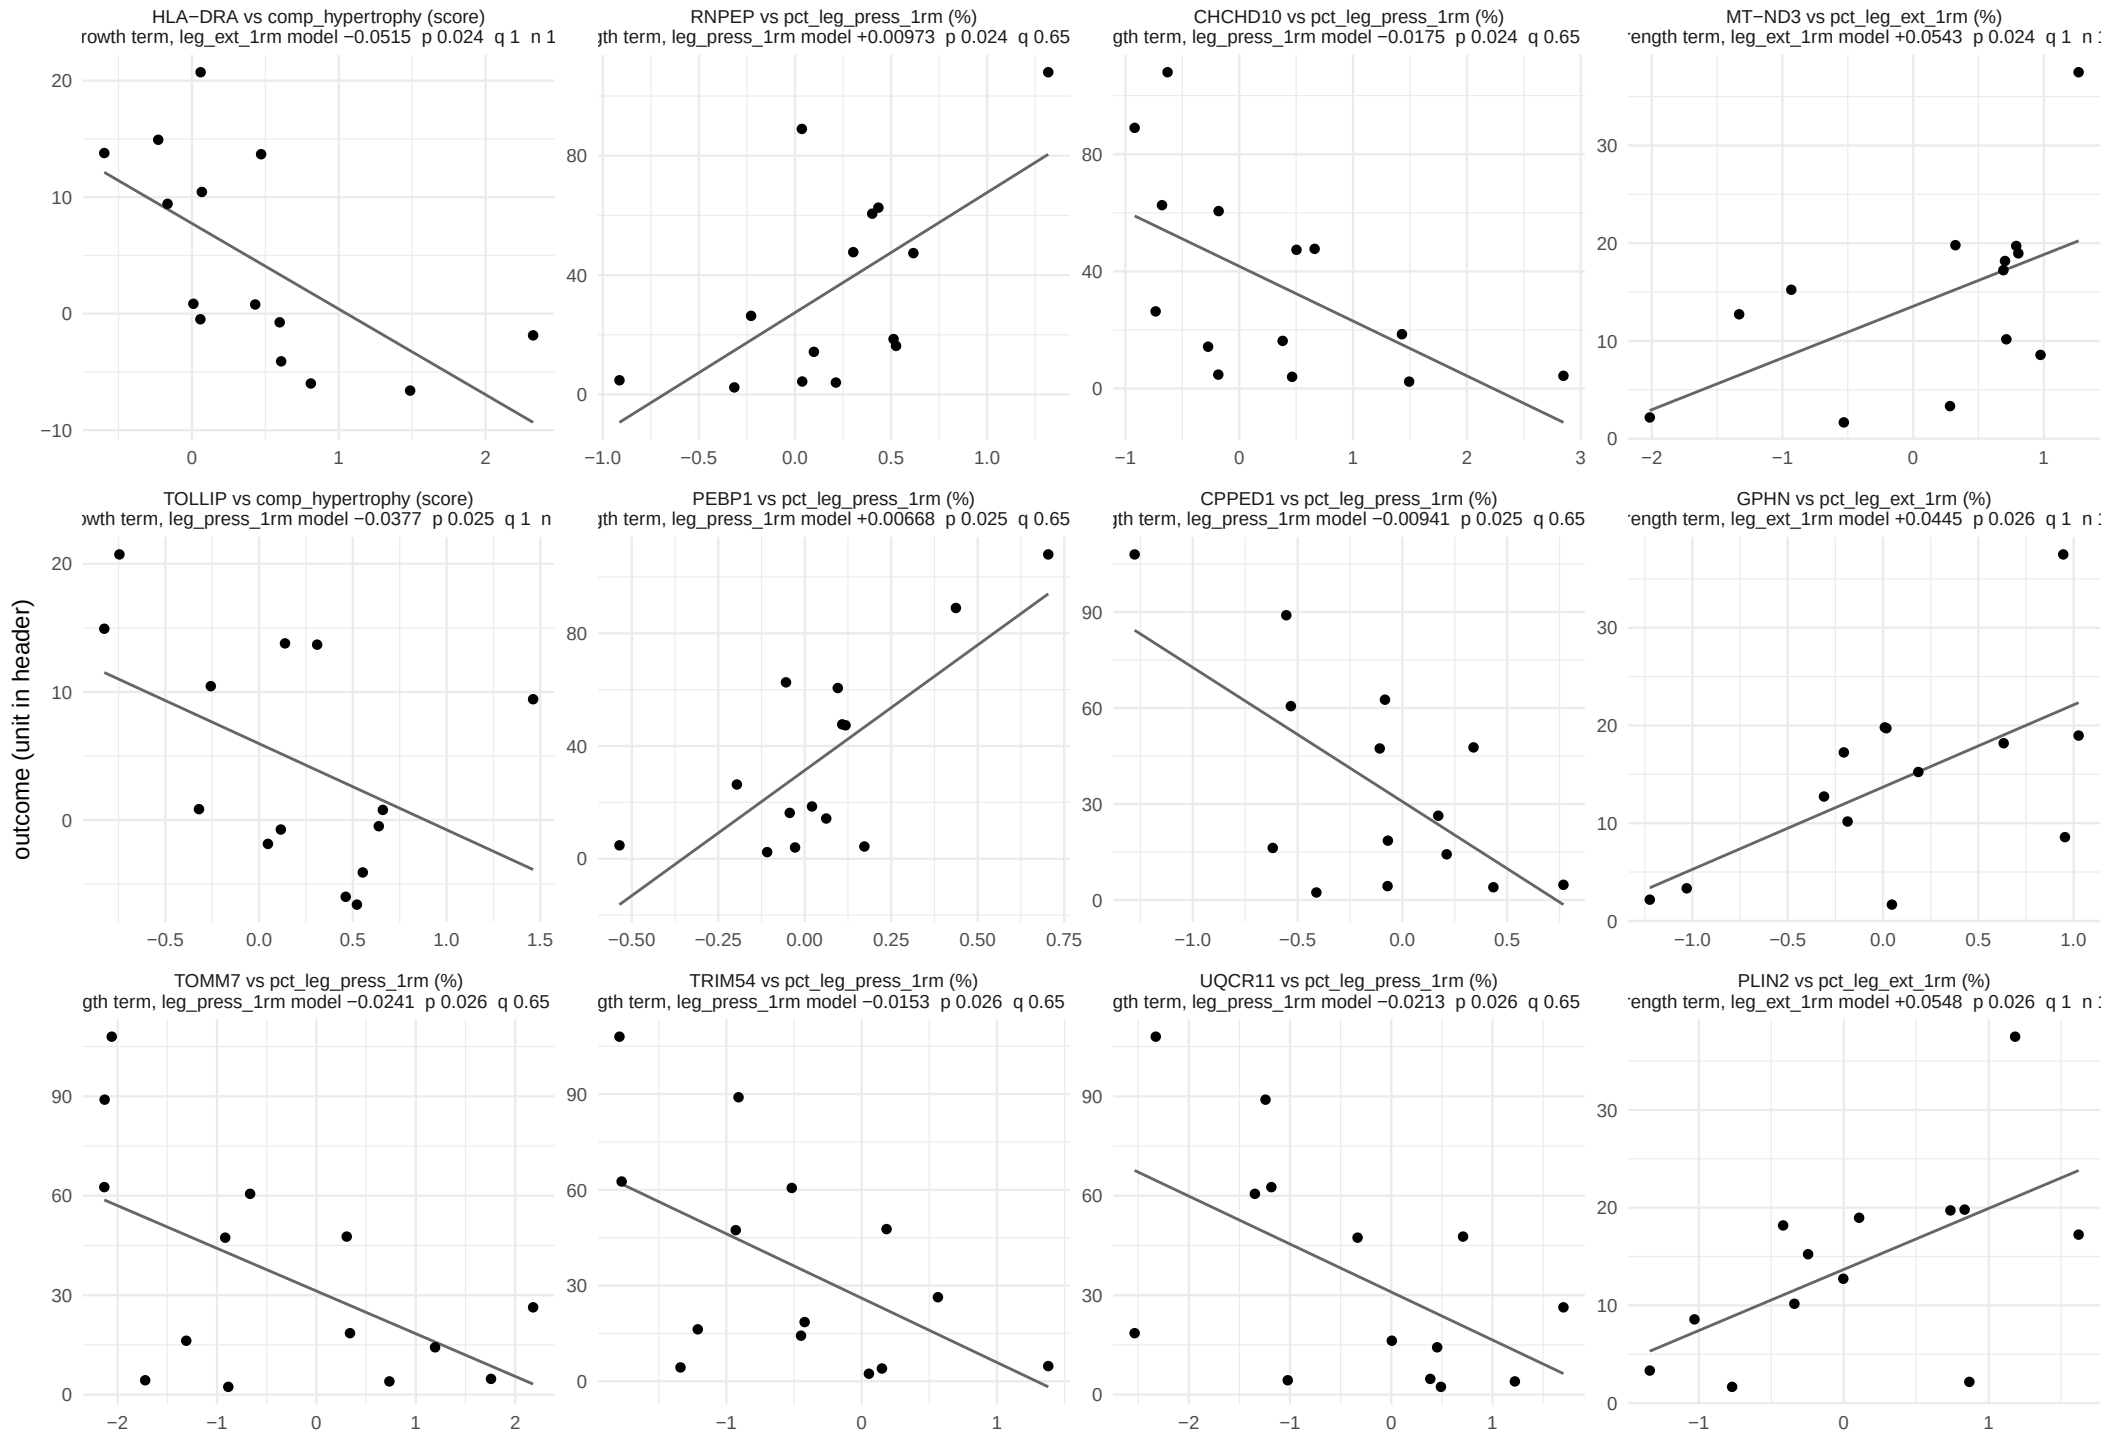

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/01_proteins.xlsx, two_predictor.

Two predictor, training window


288 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 12 of 24.

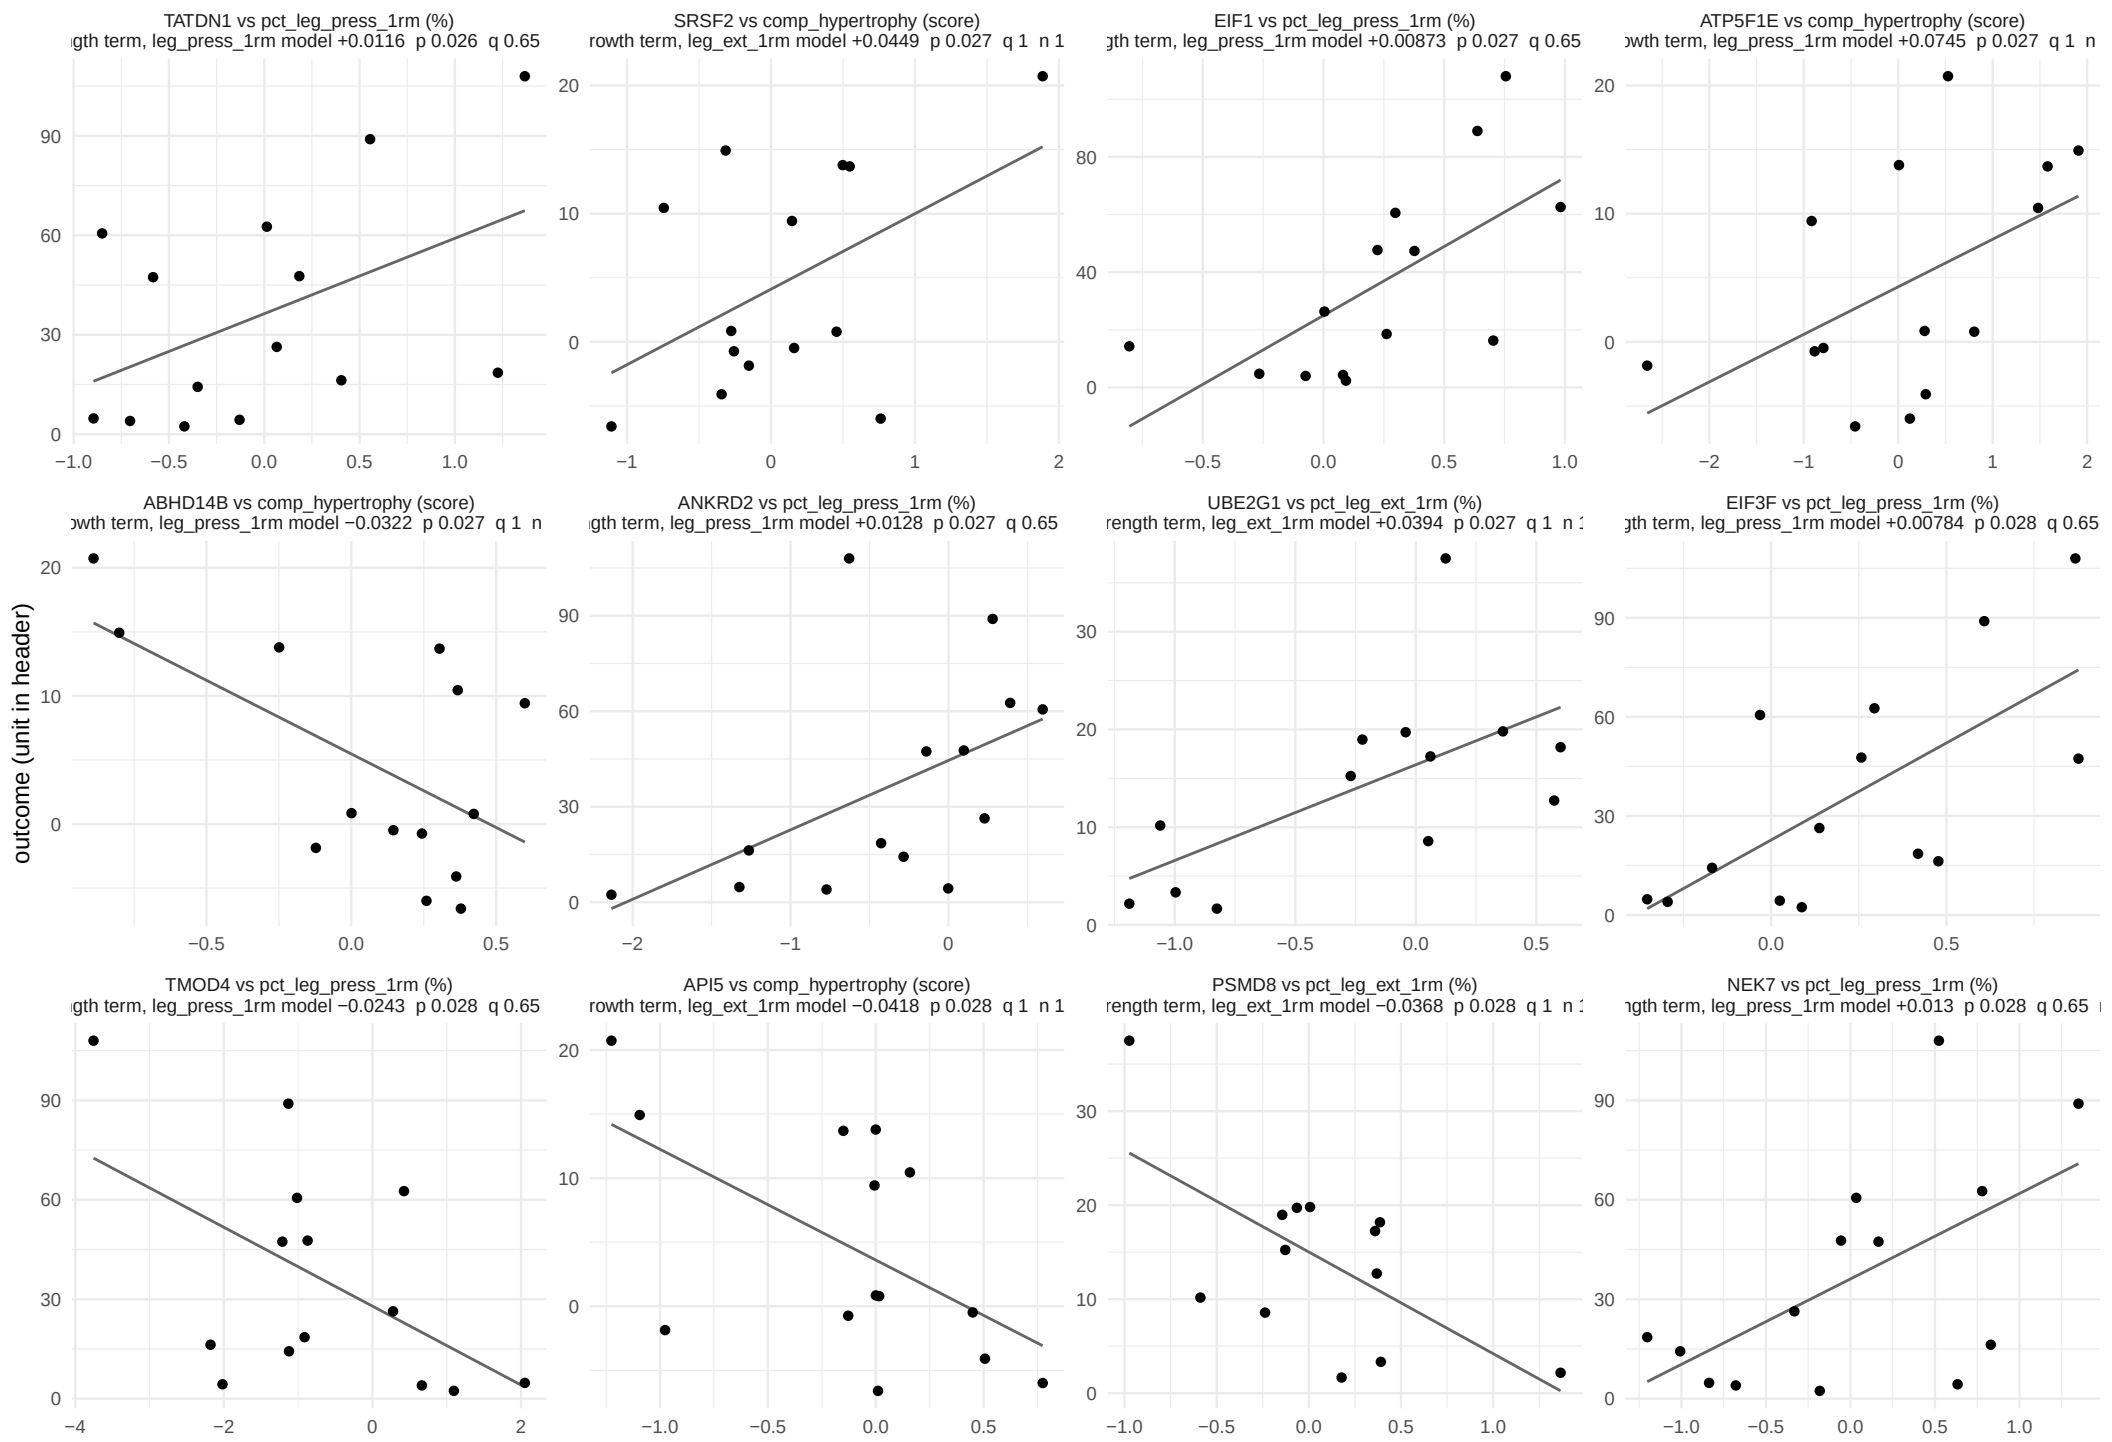

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/01_proteins.xlsx, two_predictor.

Two predictor, training window


288 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 13 of 24.

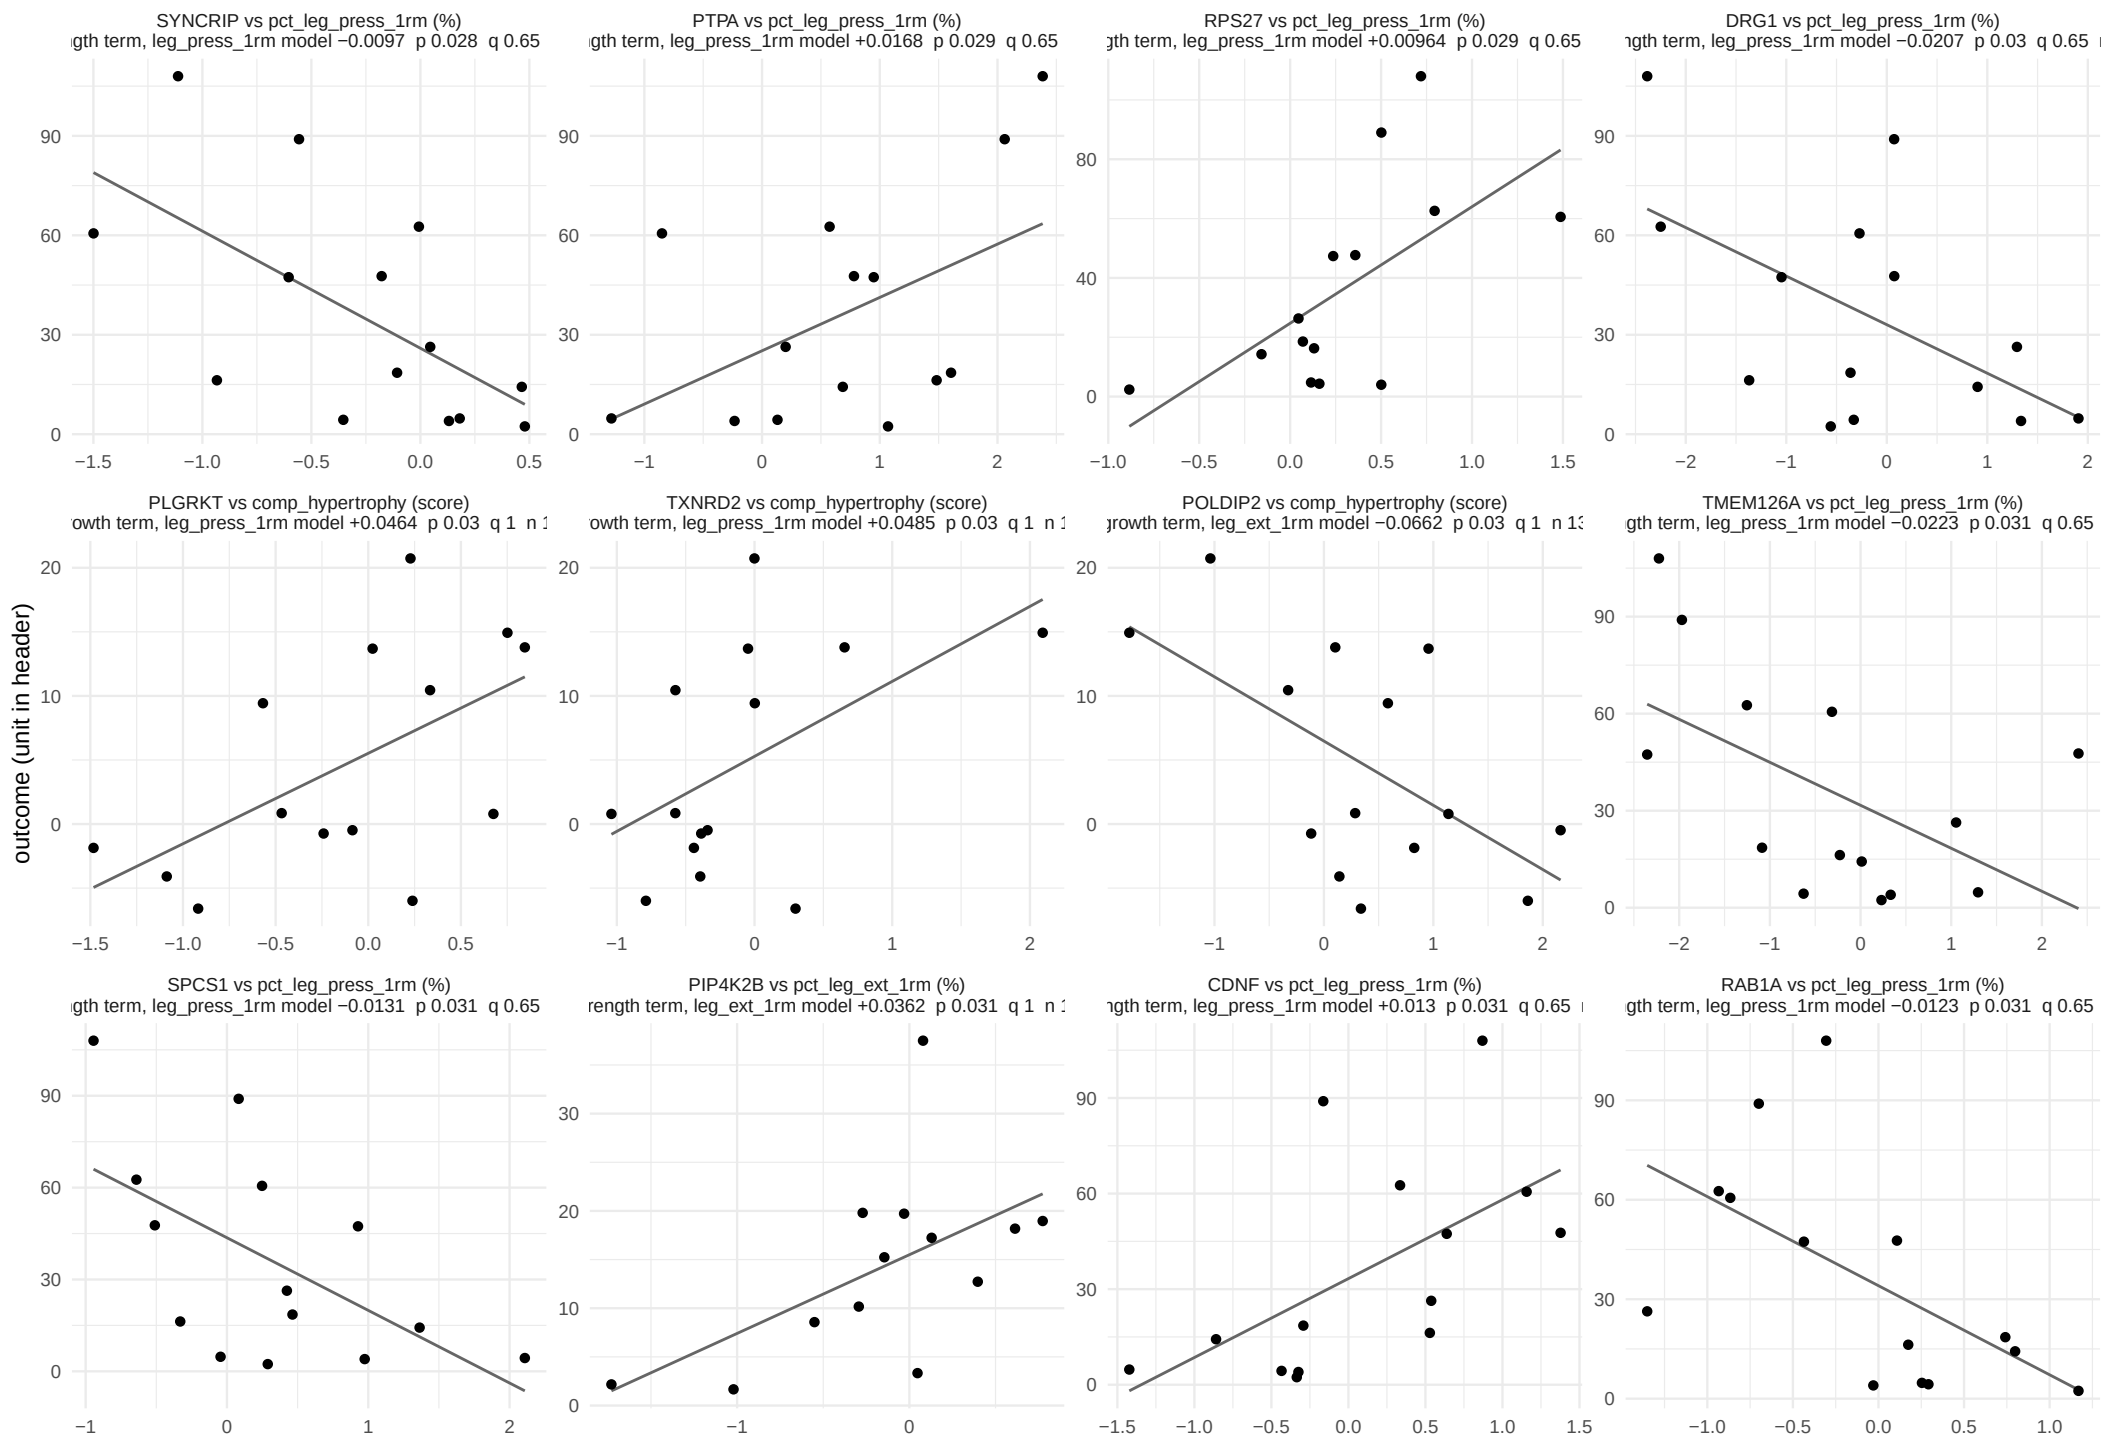

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/01_proteins.xlsx, two_predictor.

Two predictor, training window


288 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 14 of 24.

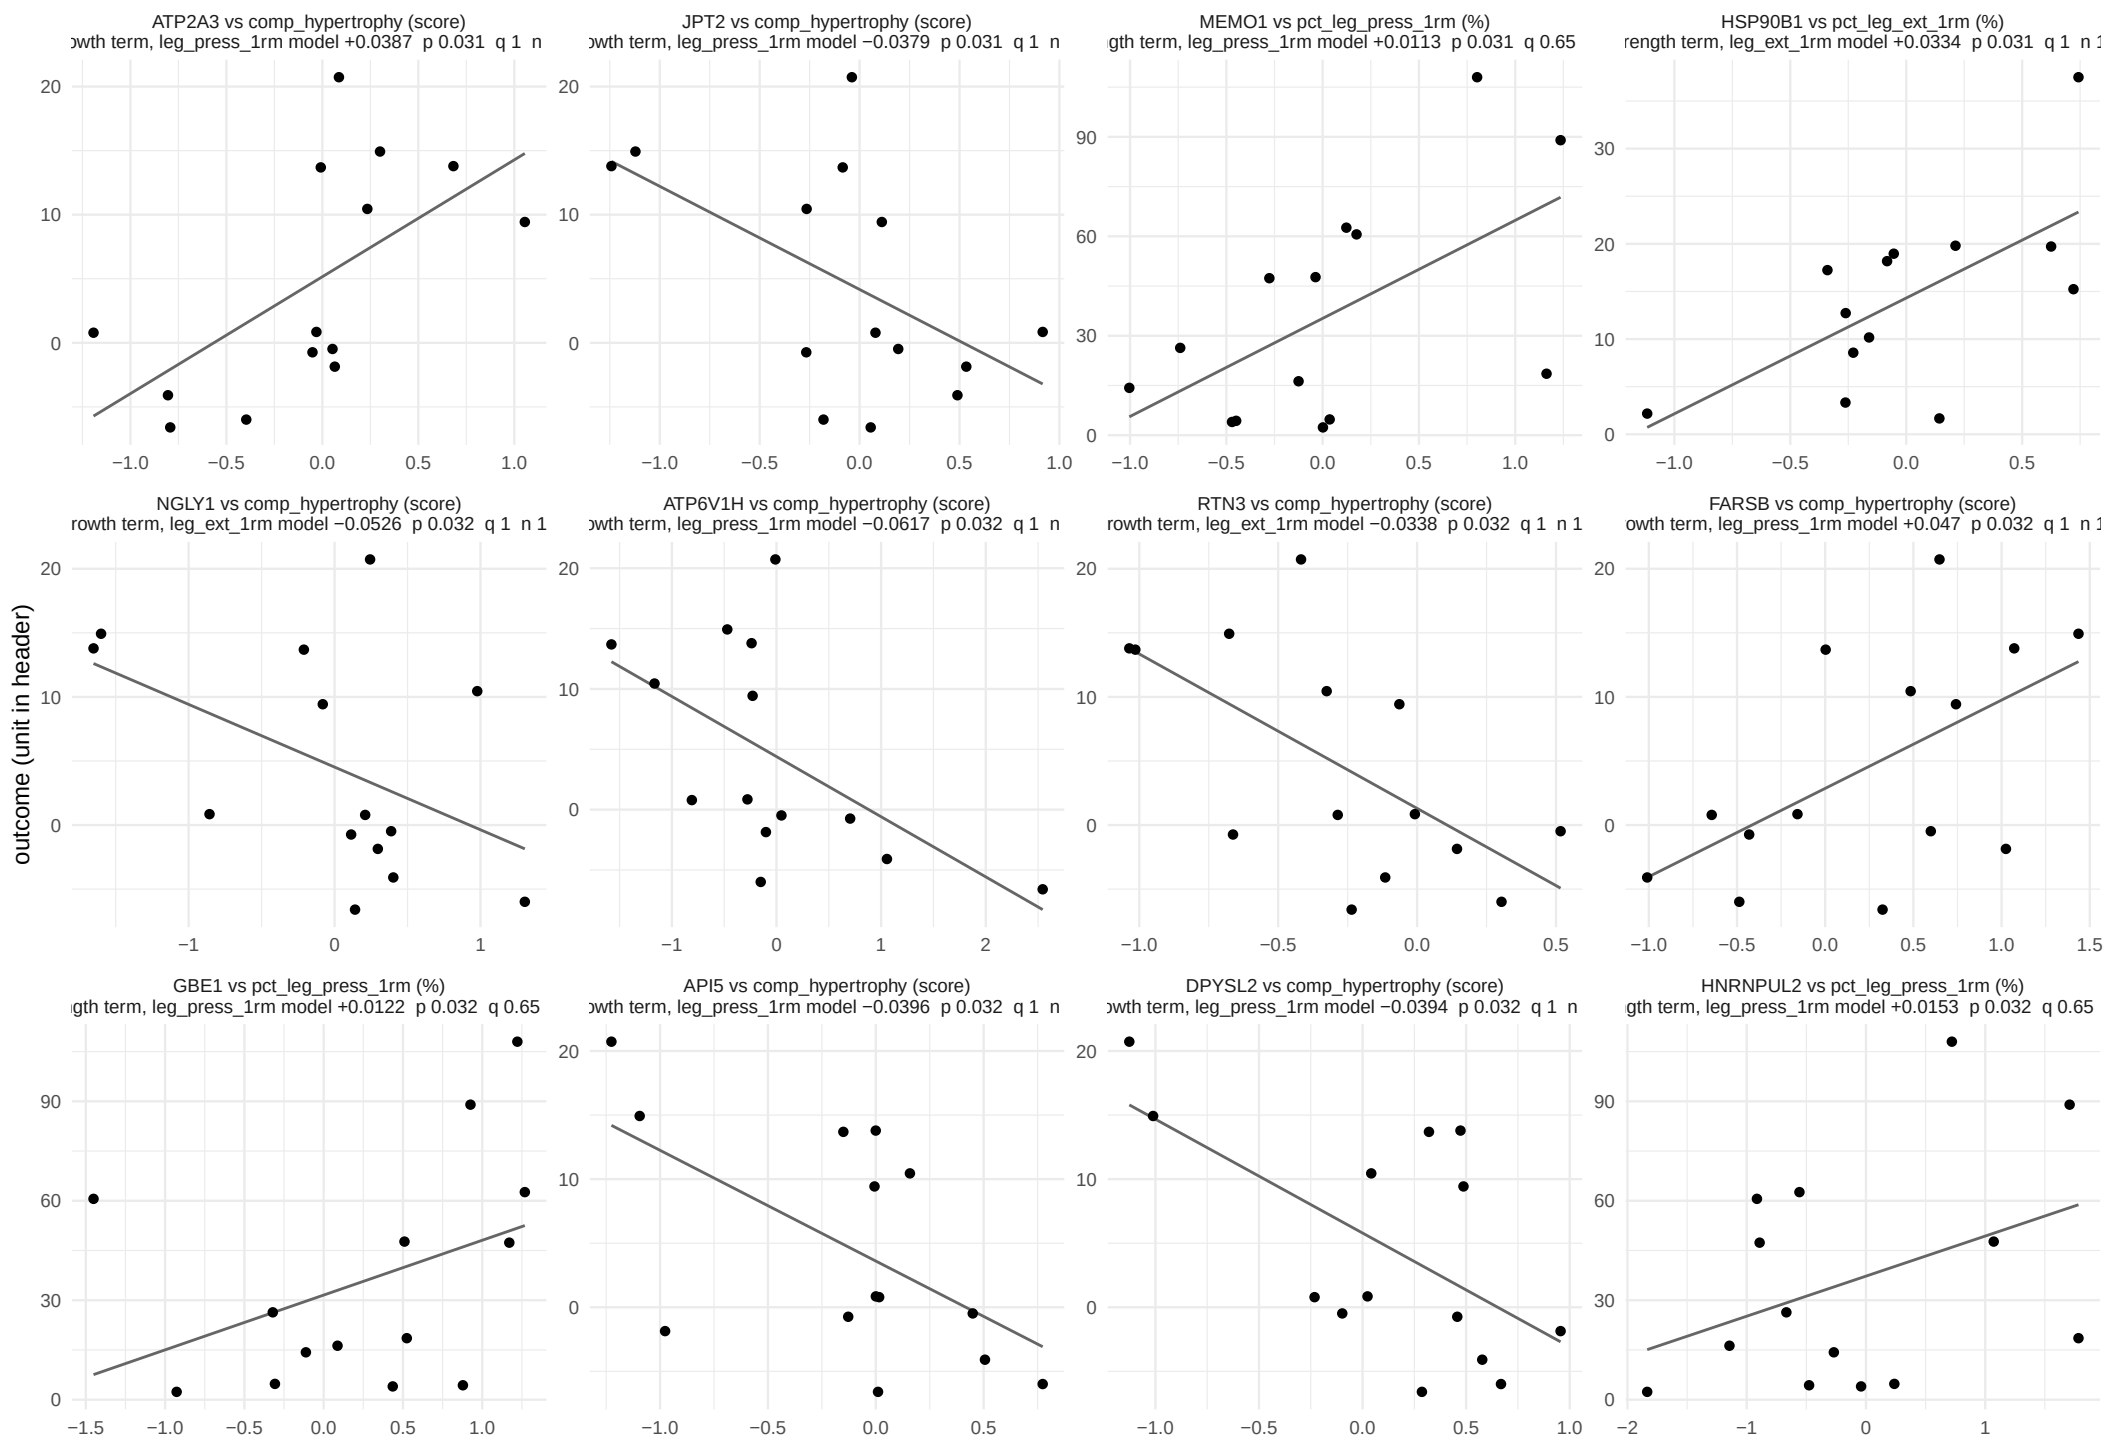

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/01_proteins.xlsx, two_predictor.

Two predictor, training window


288 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 15 of 24.

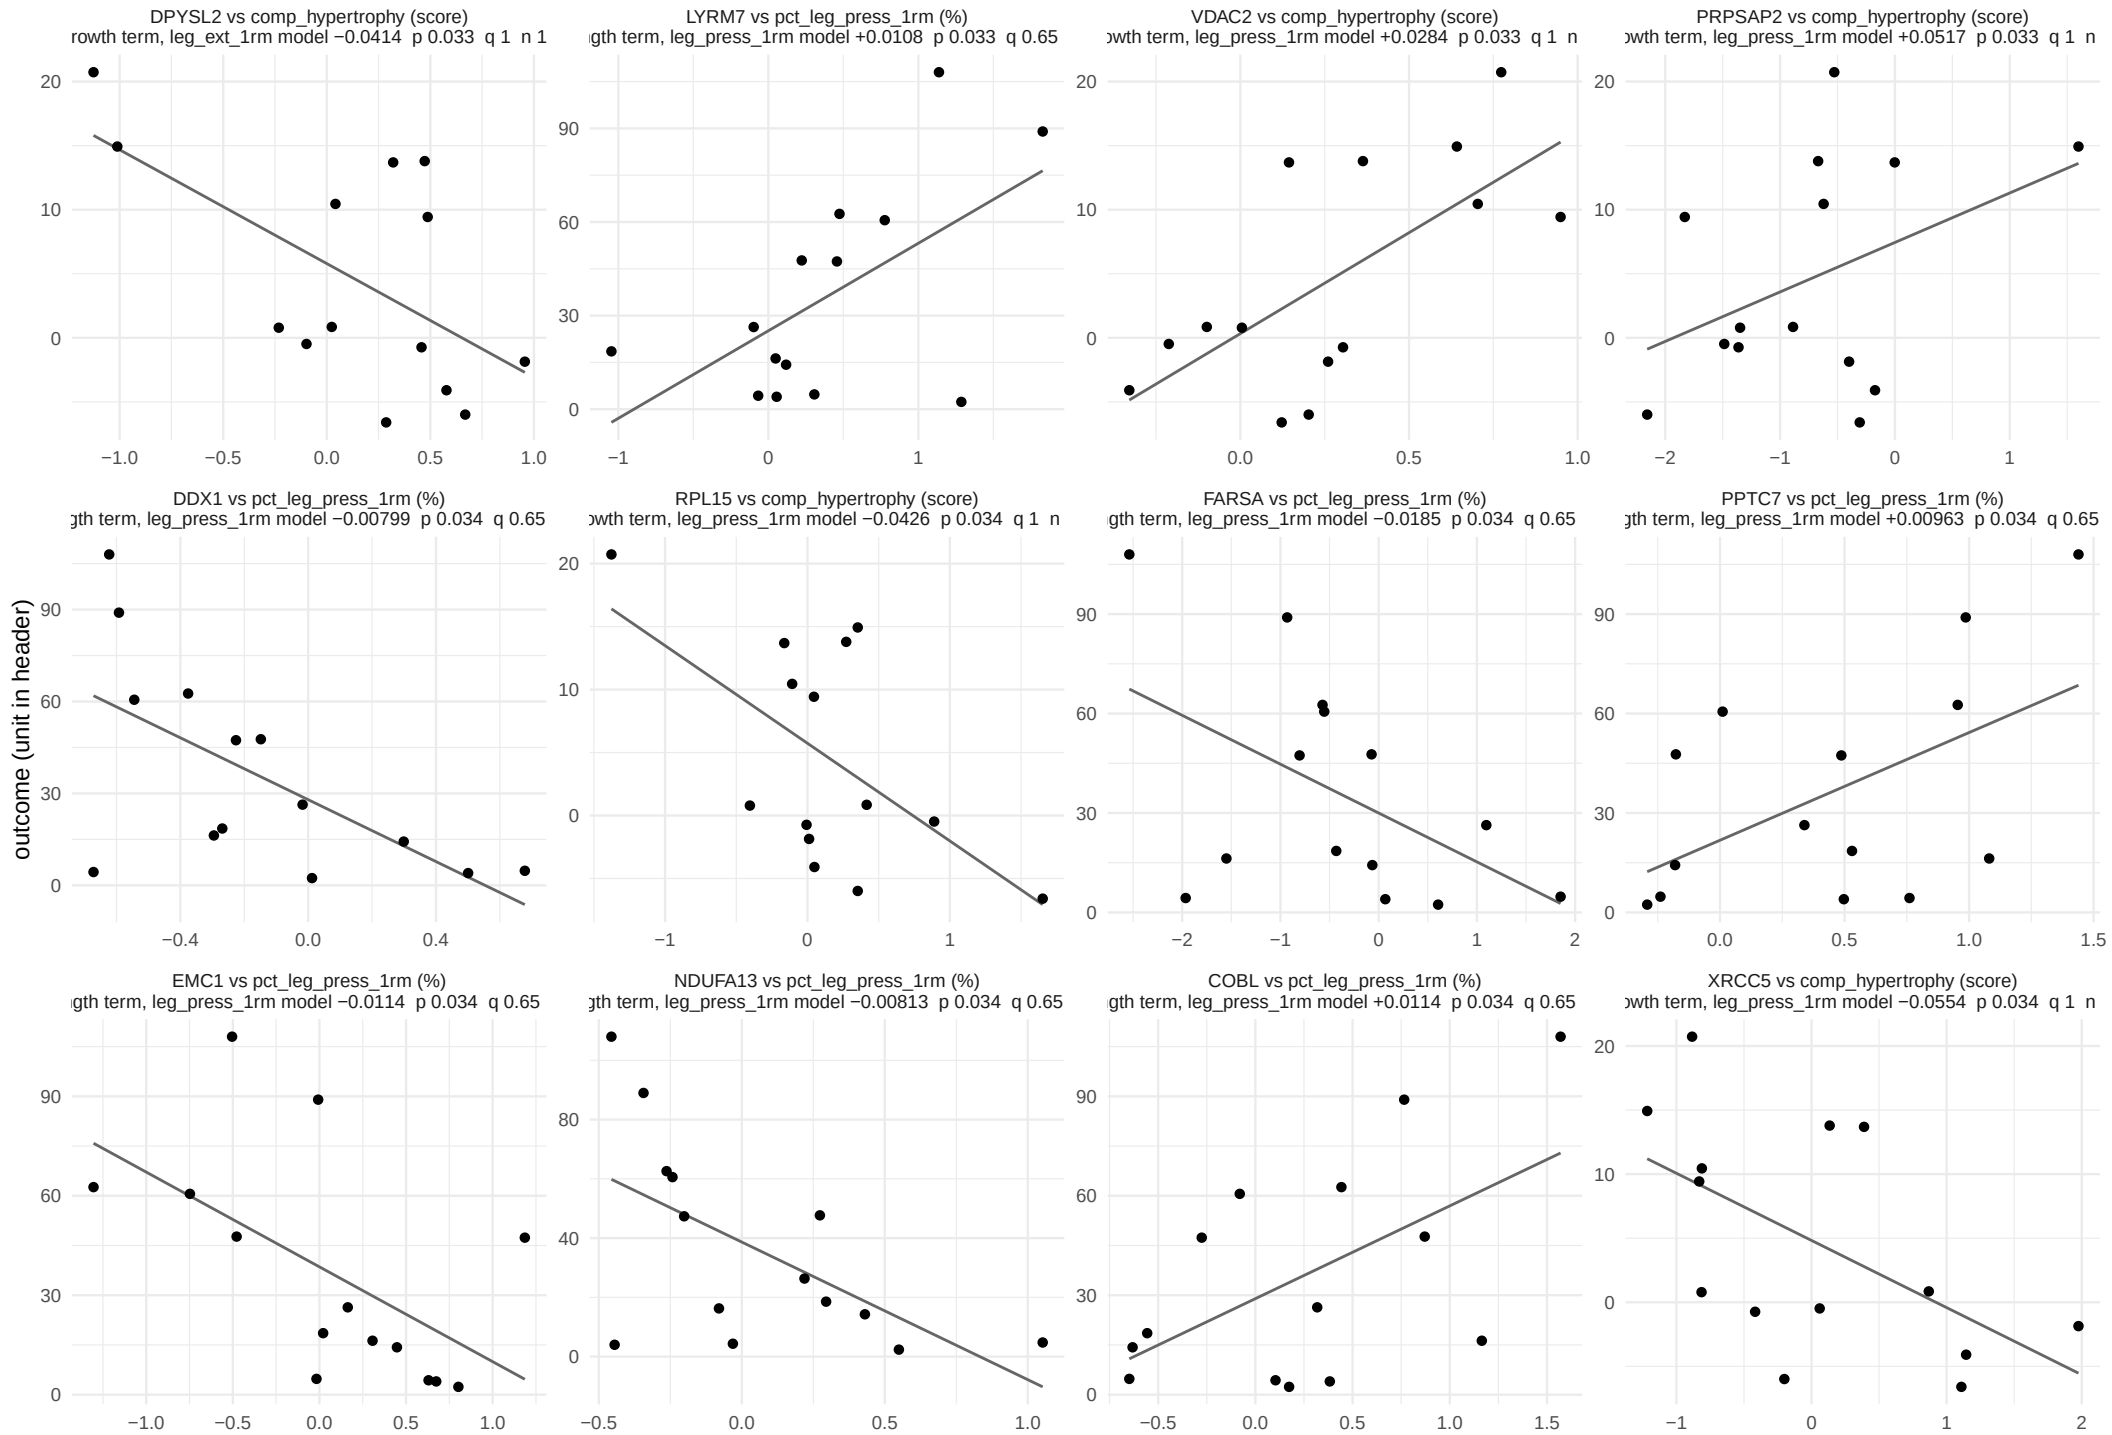

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/01_proteins.xlsx, two_predictor.

Two predictor, training window


288 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 16 of 24.

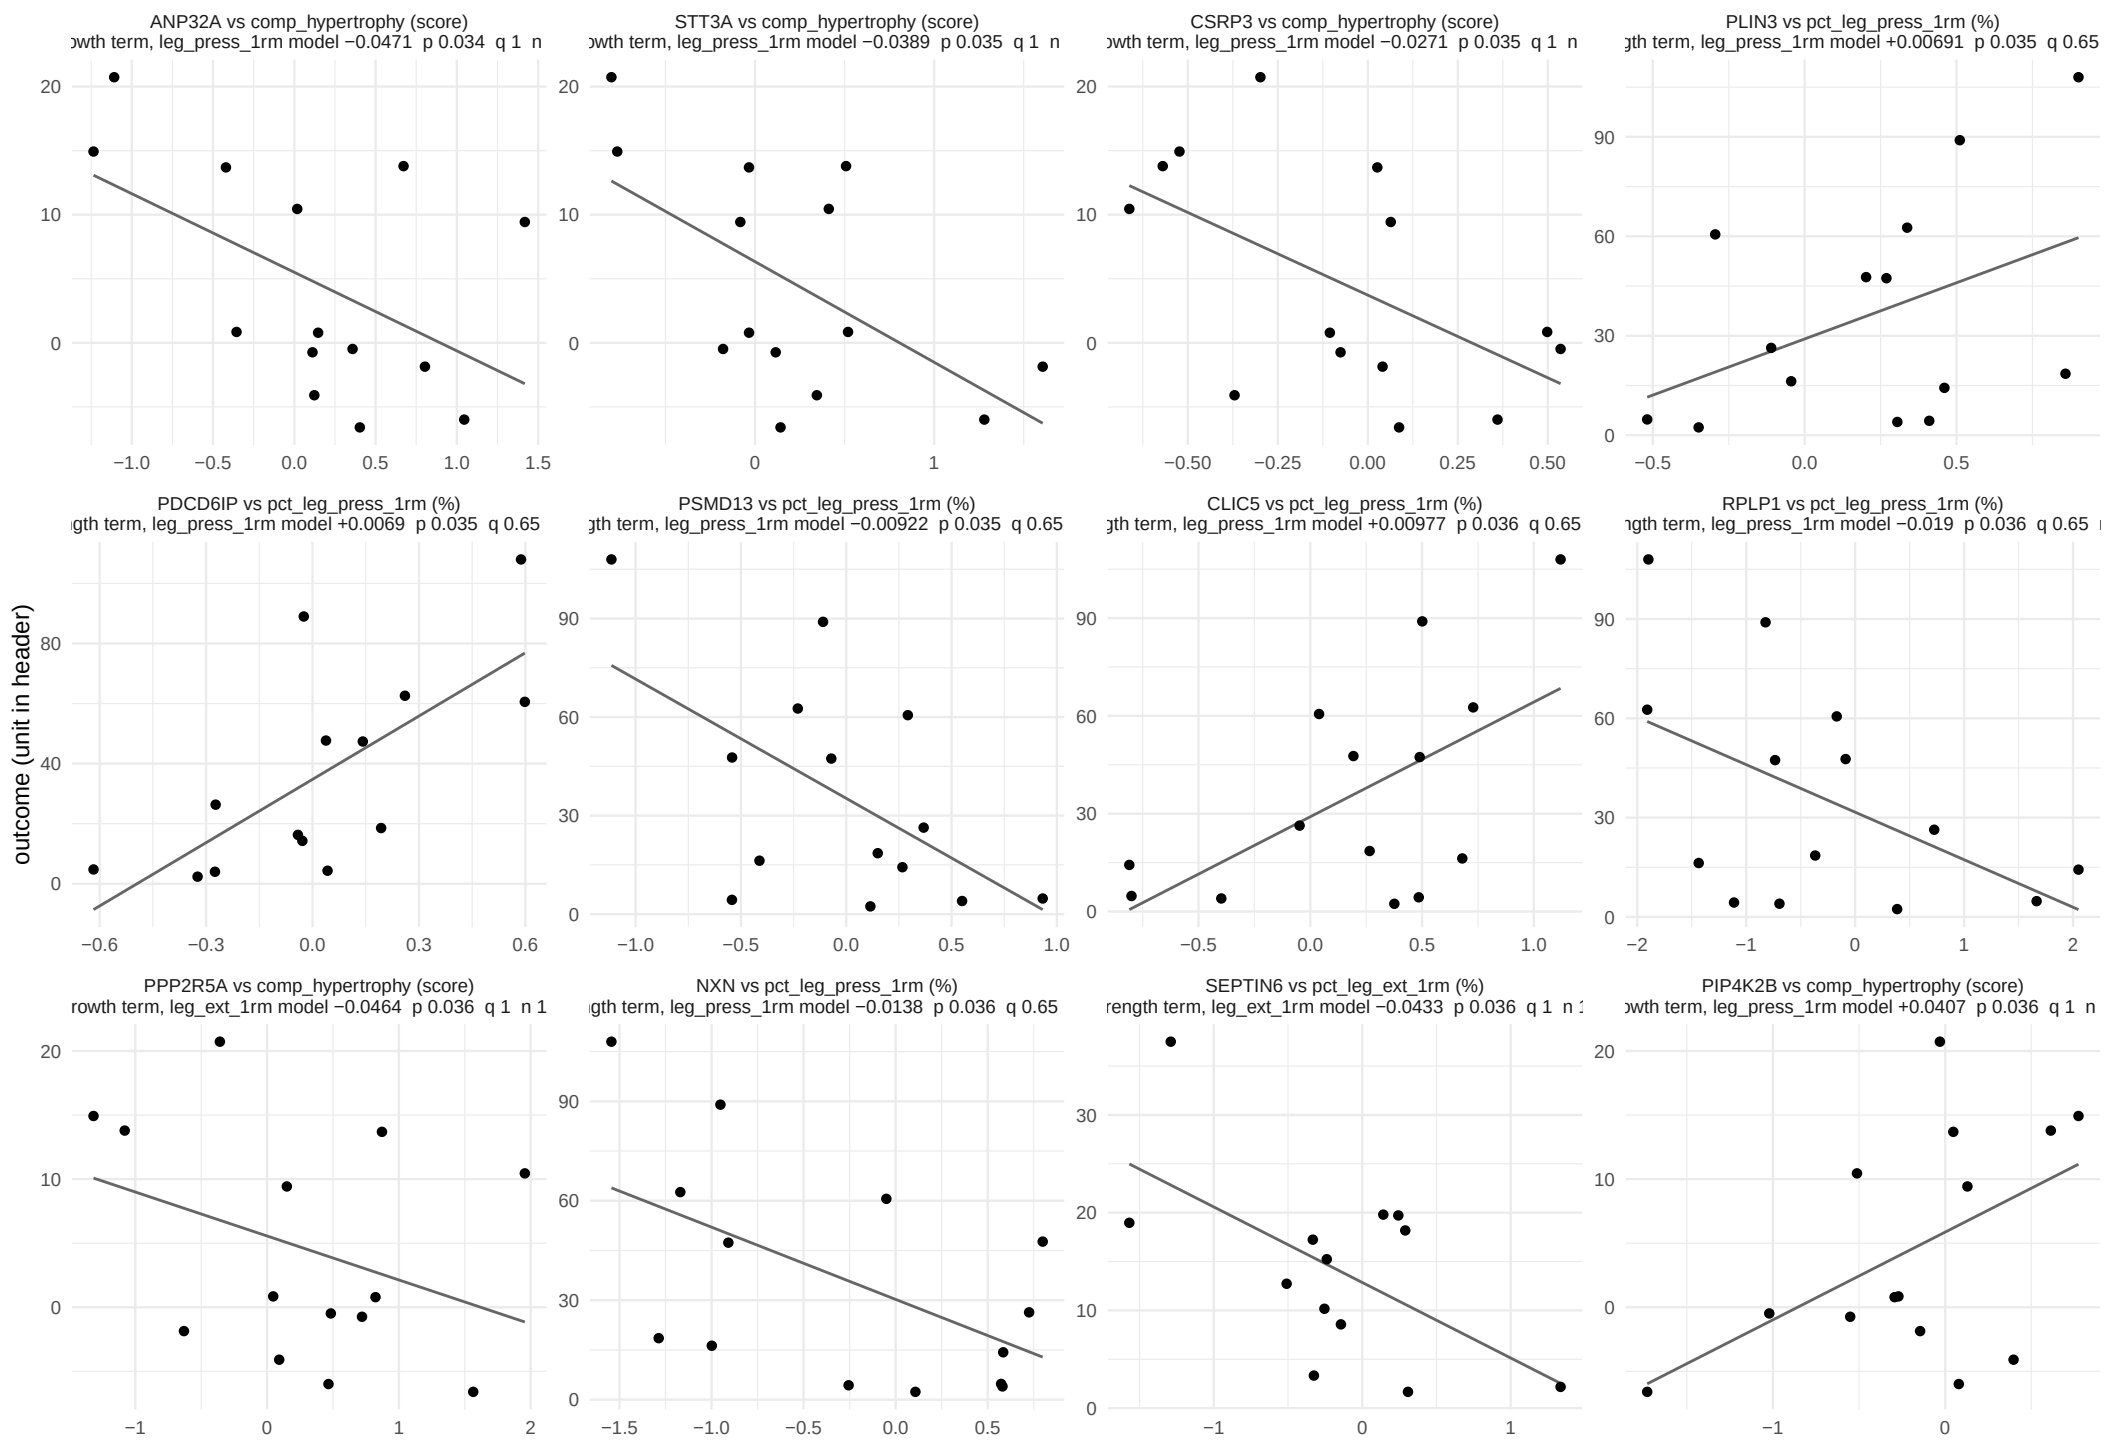

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/01_proteins.xlsx, two_predictor.

Two predictor, training window


288 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 17 of 24.

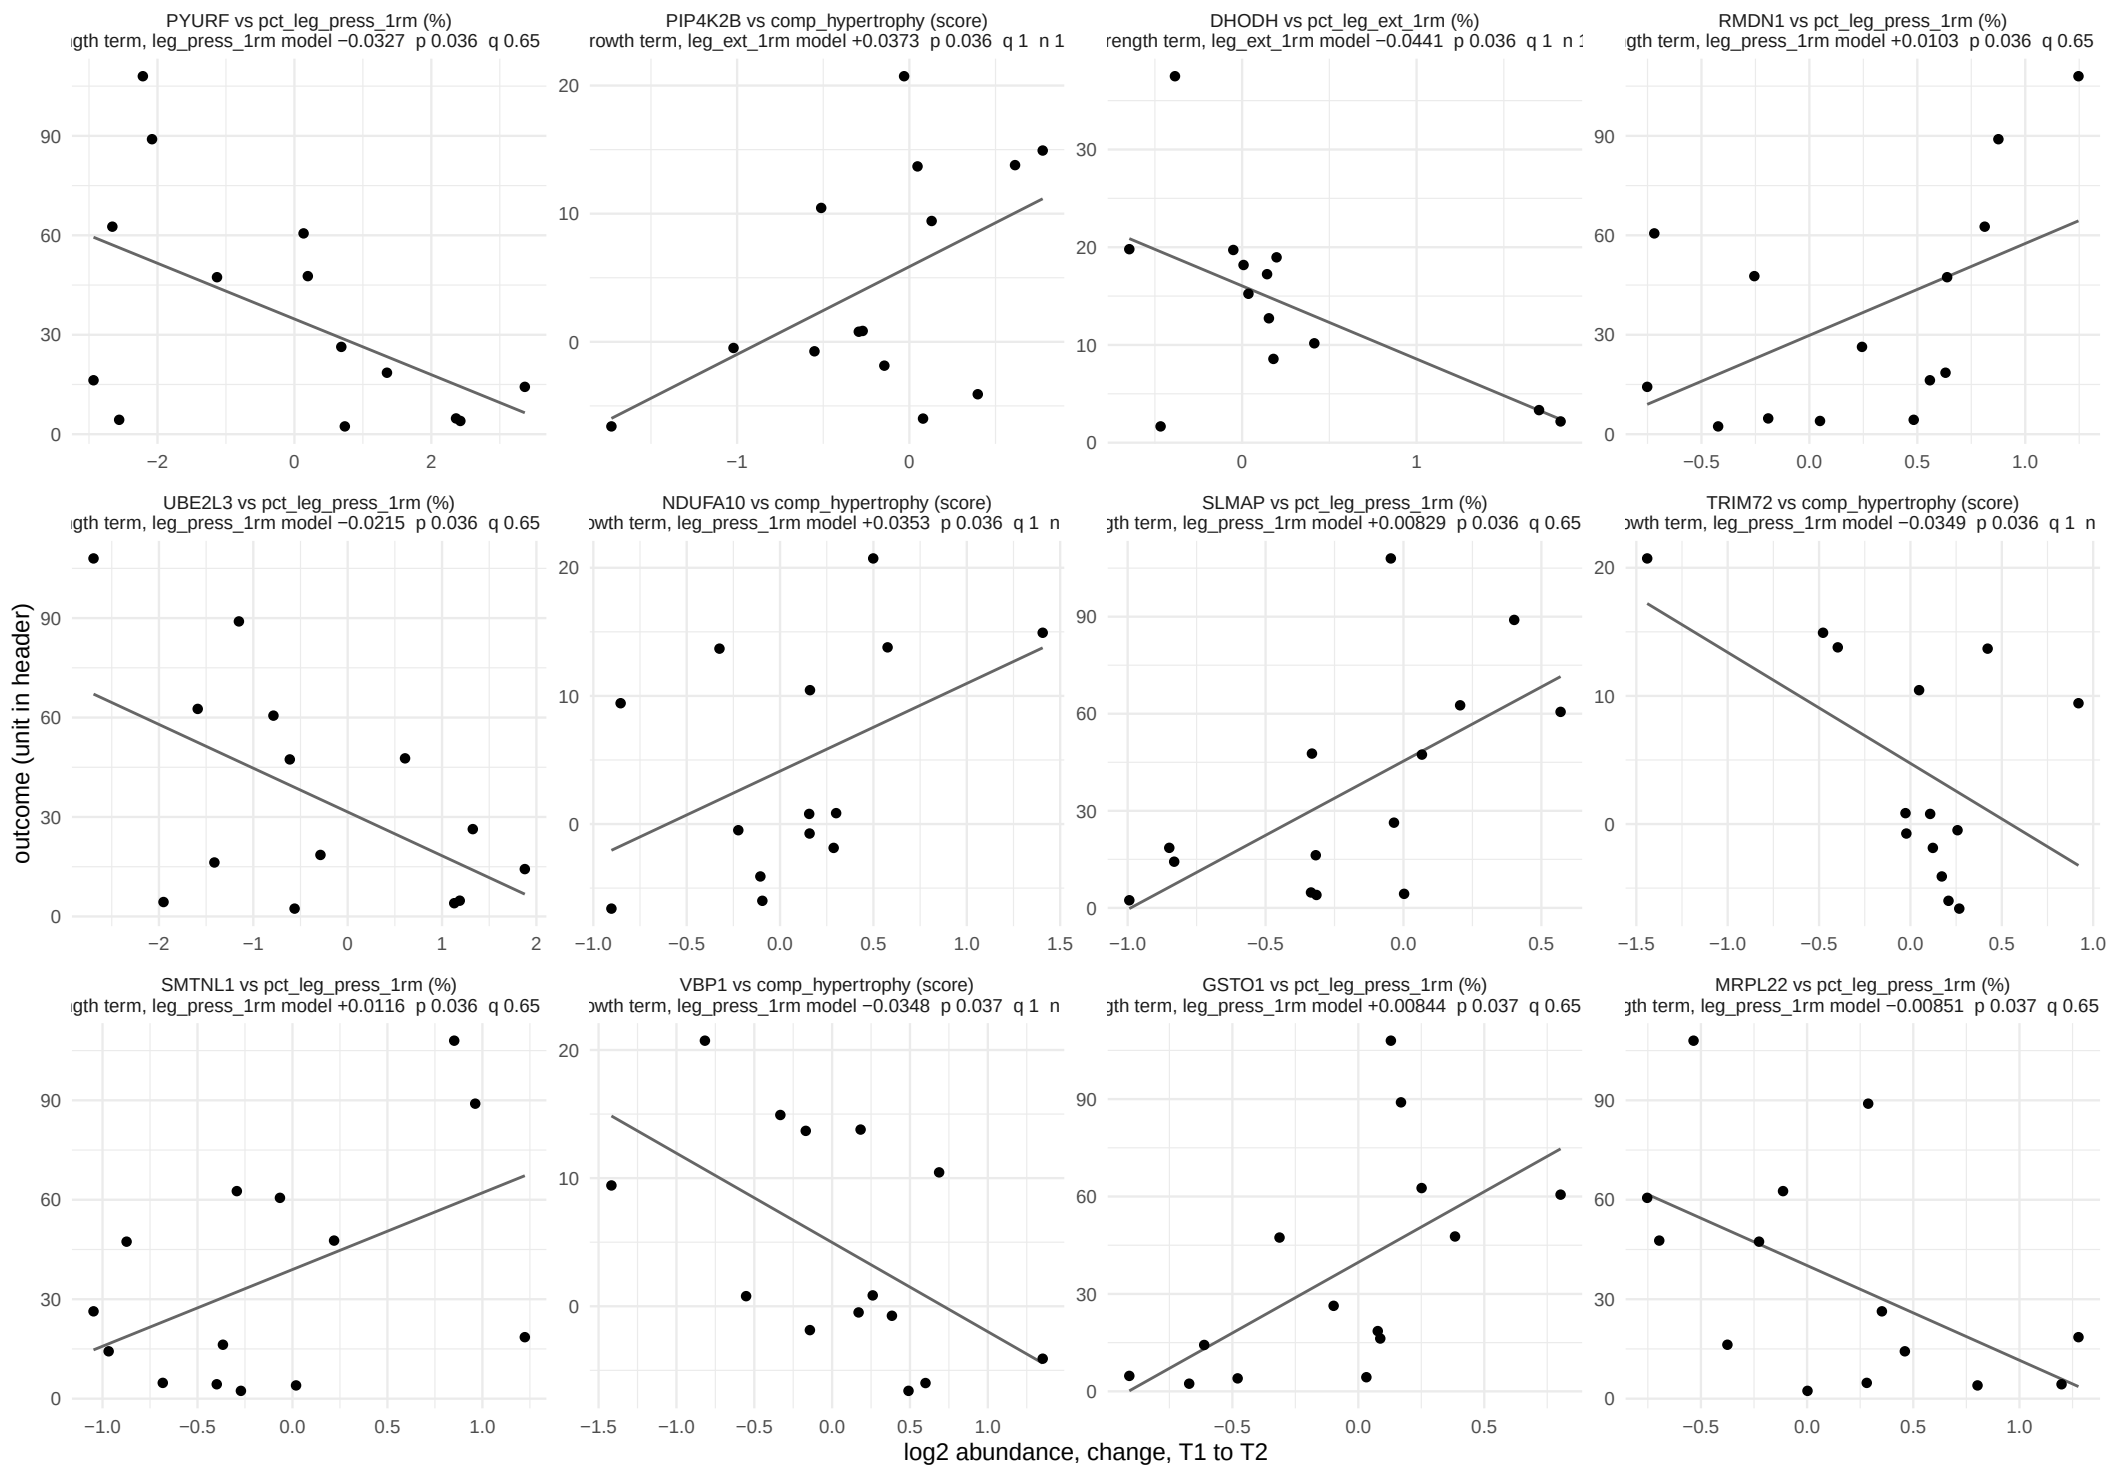

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/01_proteins.xlsx, two_predictor.

Two predictor, training window


288 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 18 of 24.

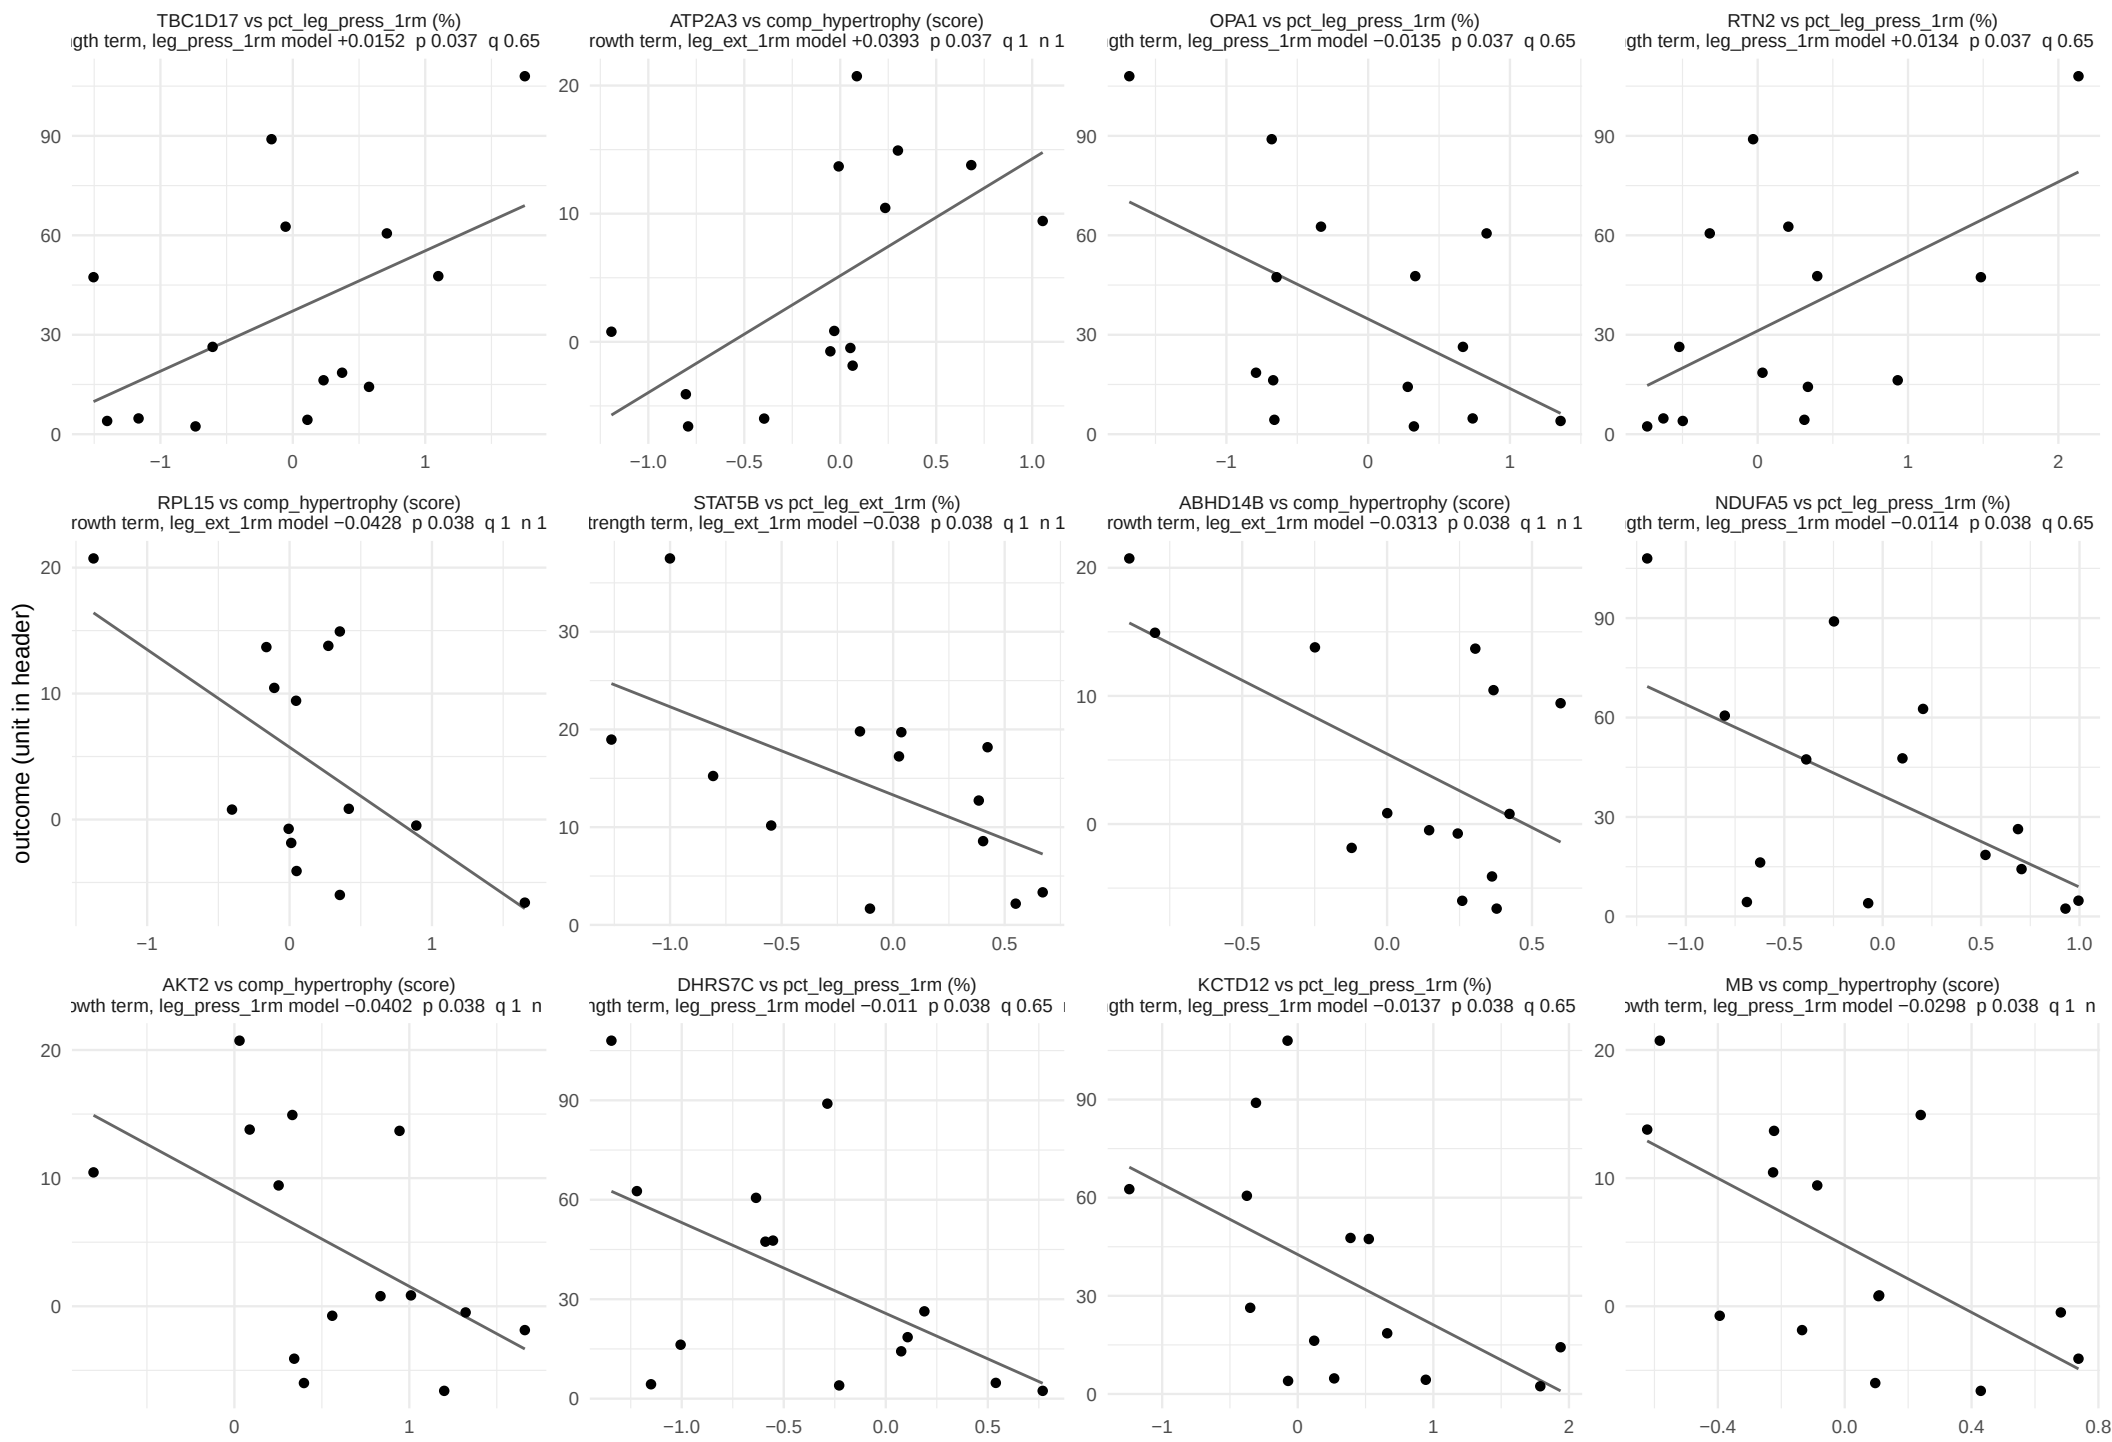

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/01_proteins.xlsx, two_predictor.

Two predictor, training window


288 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 19 of 24.

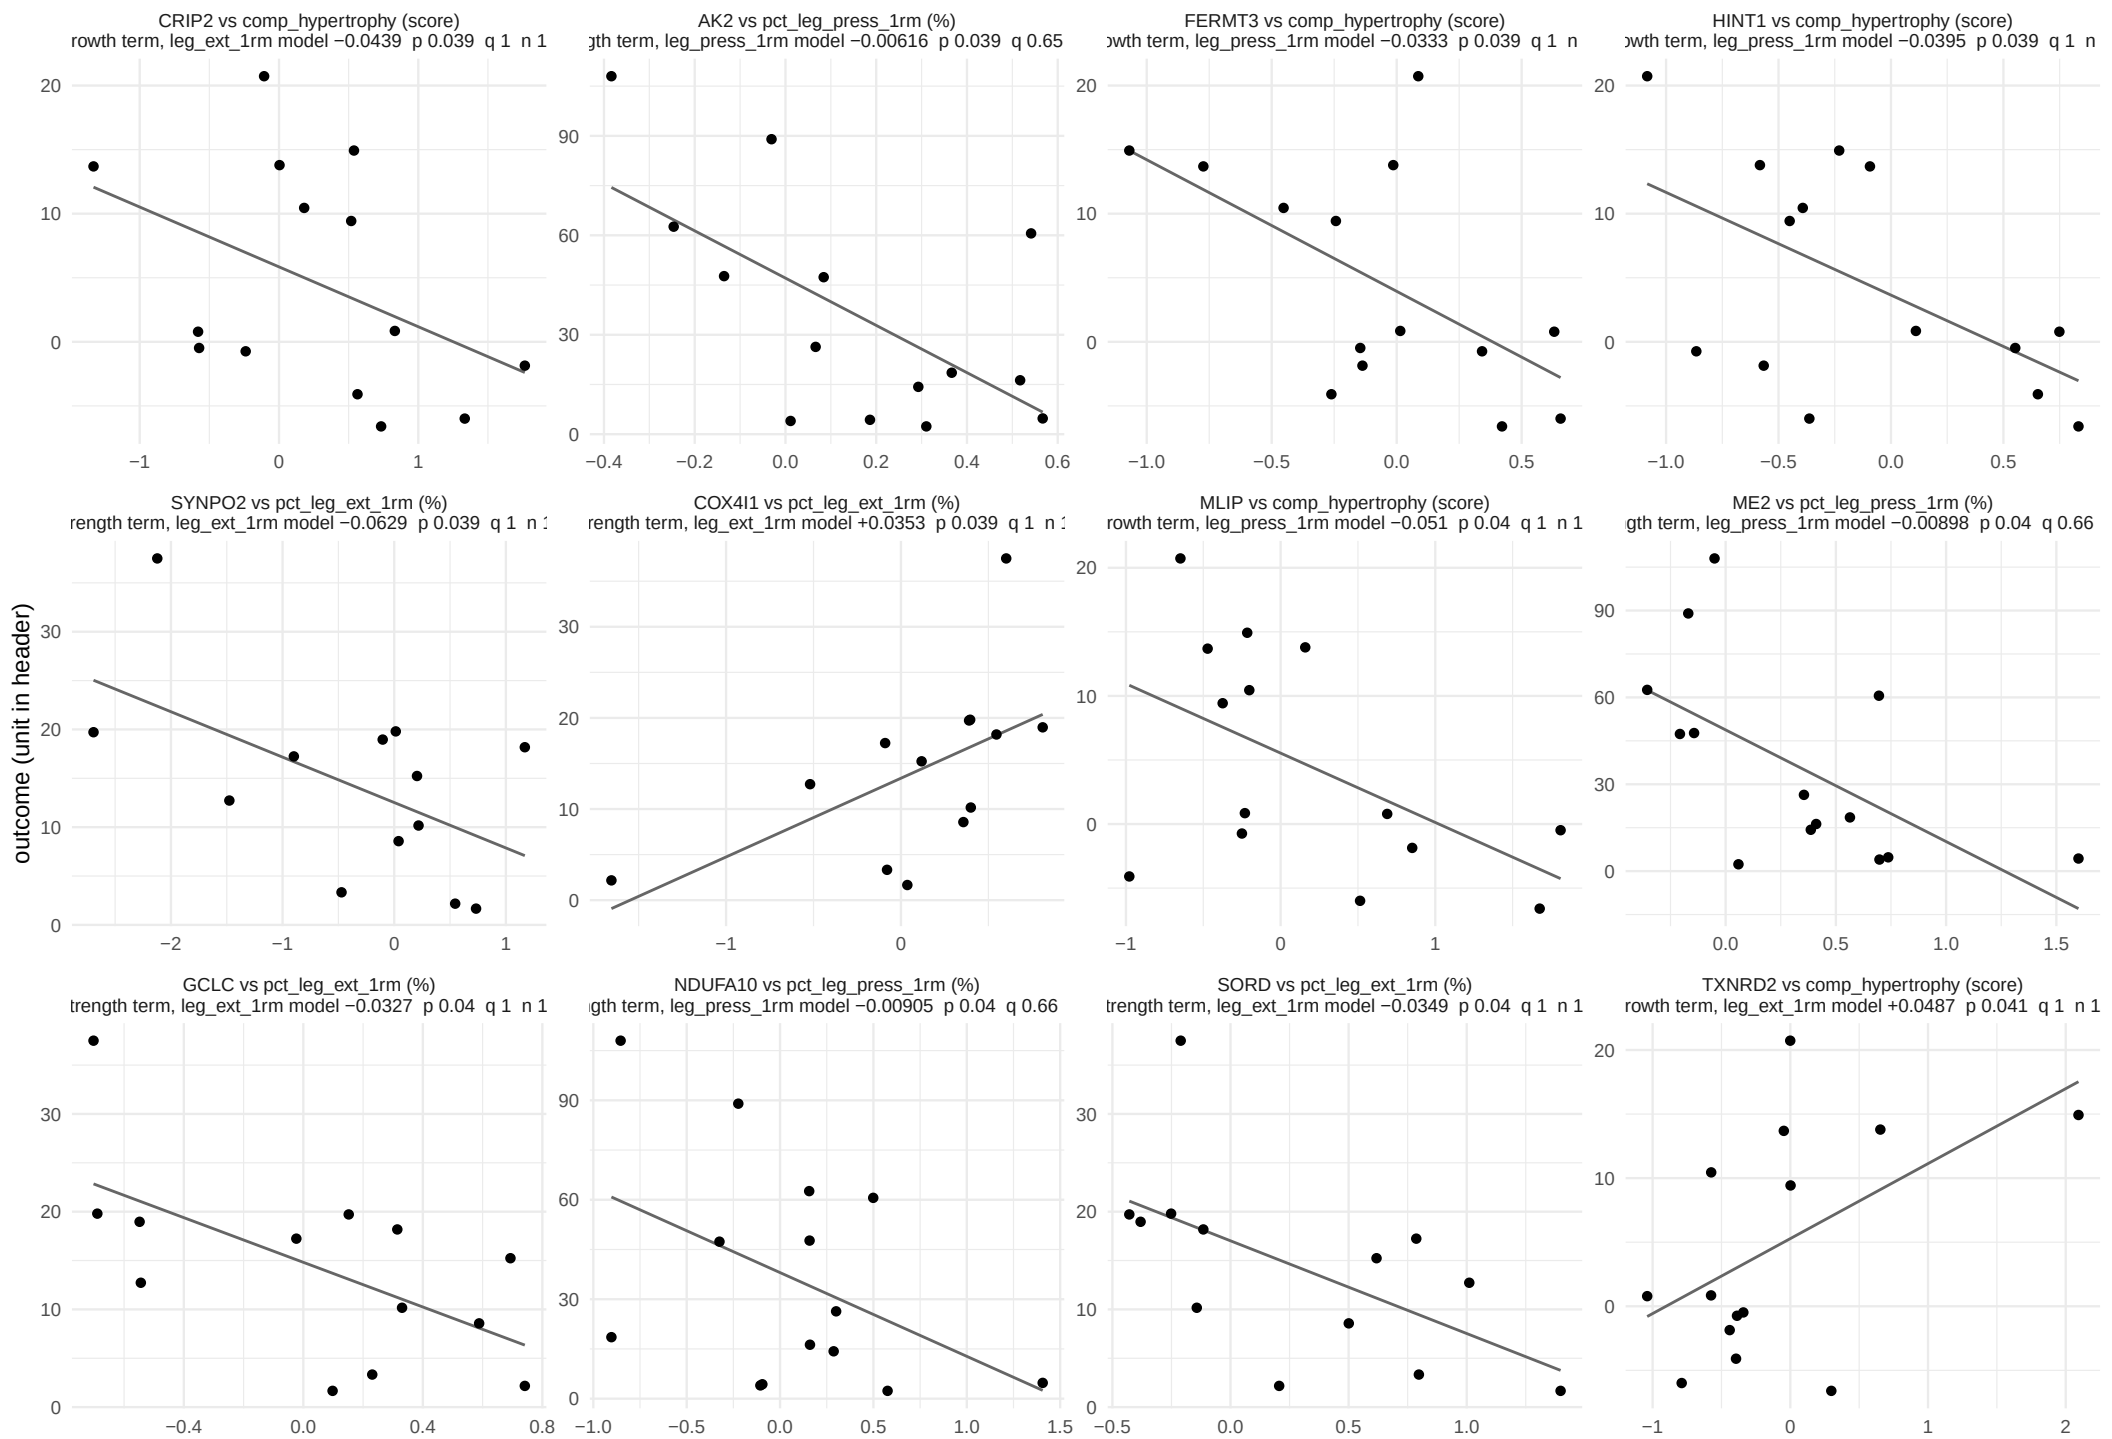

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/01_proteins.xlsx, two_predictor.

Two predictor, training window


288 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 20 of 24.

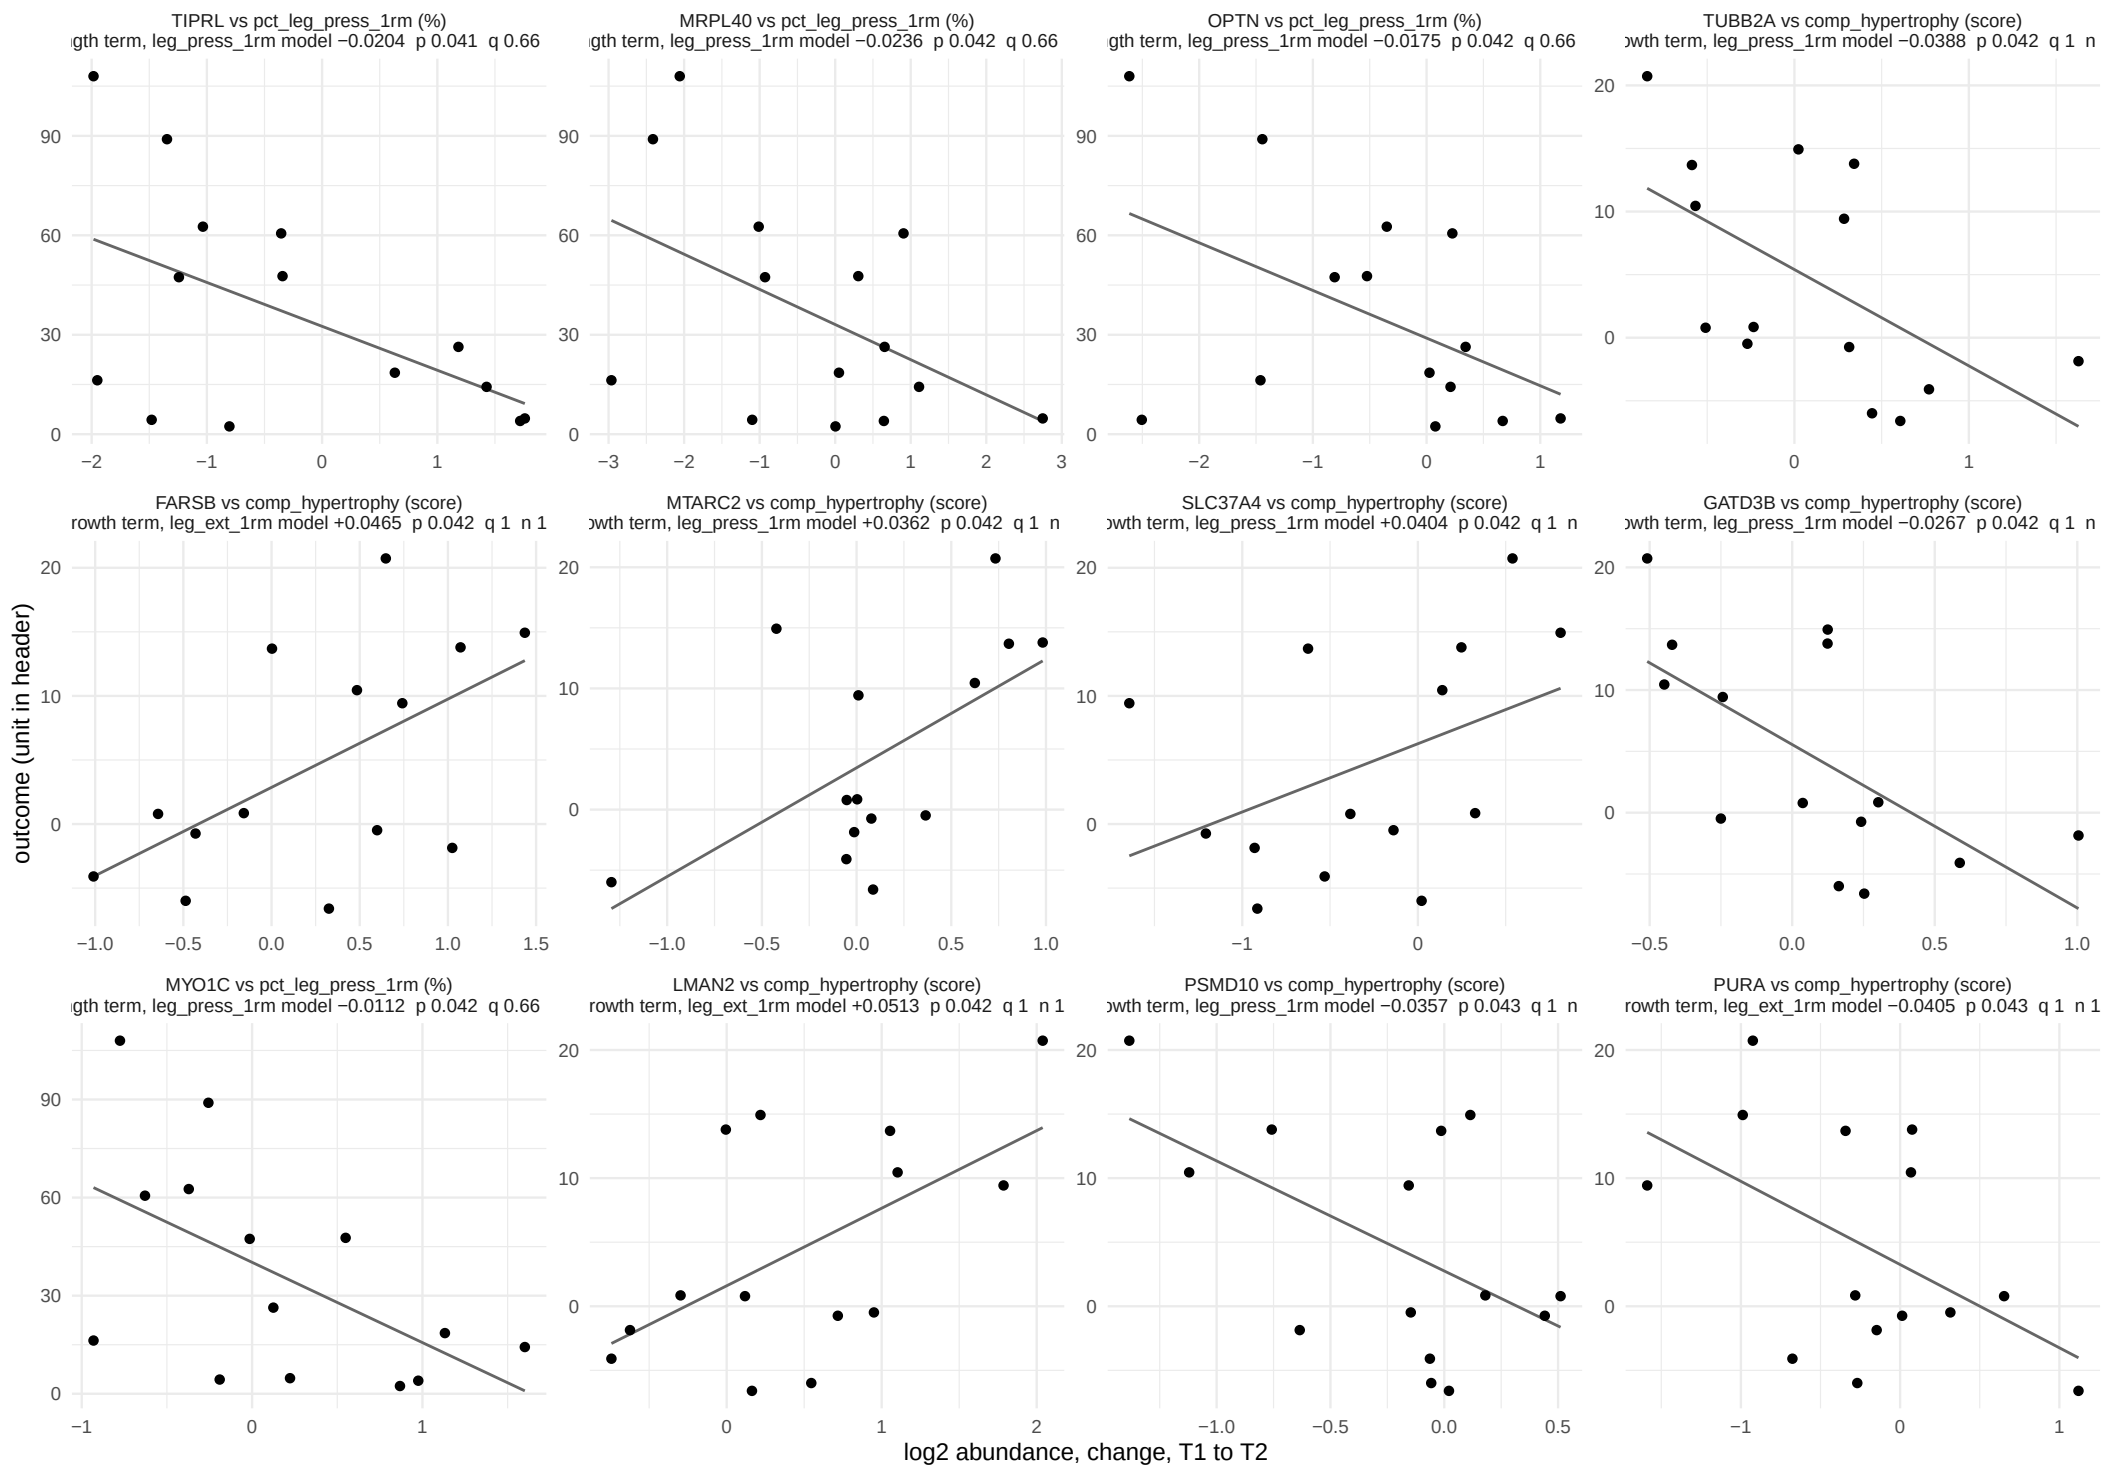

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/01_proteins.xlsx, two_predictor.

Two predictor, training window


288 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 21 of 24.

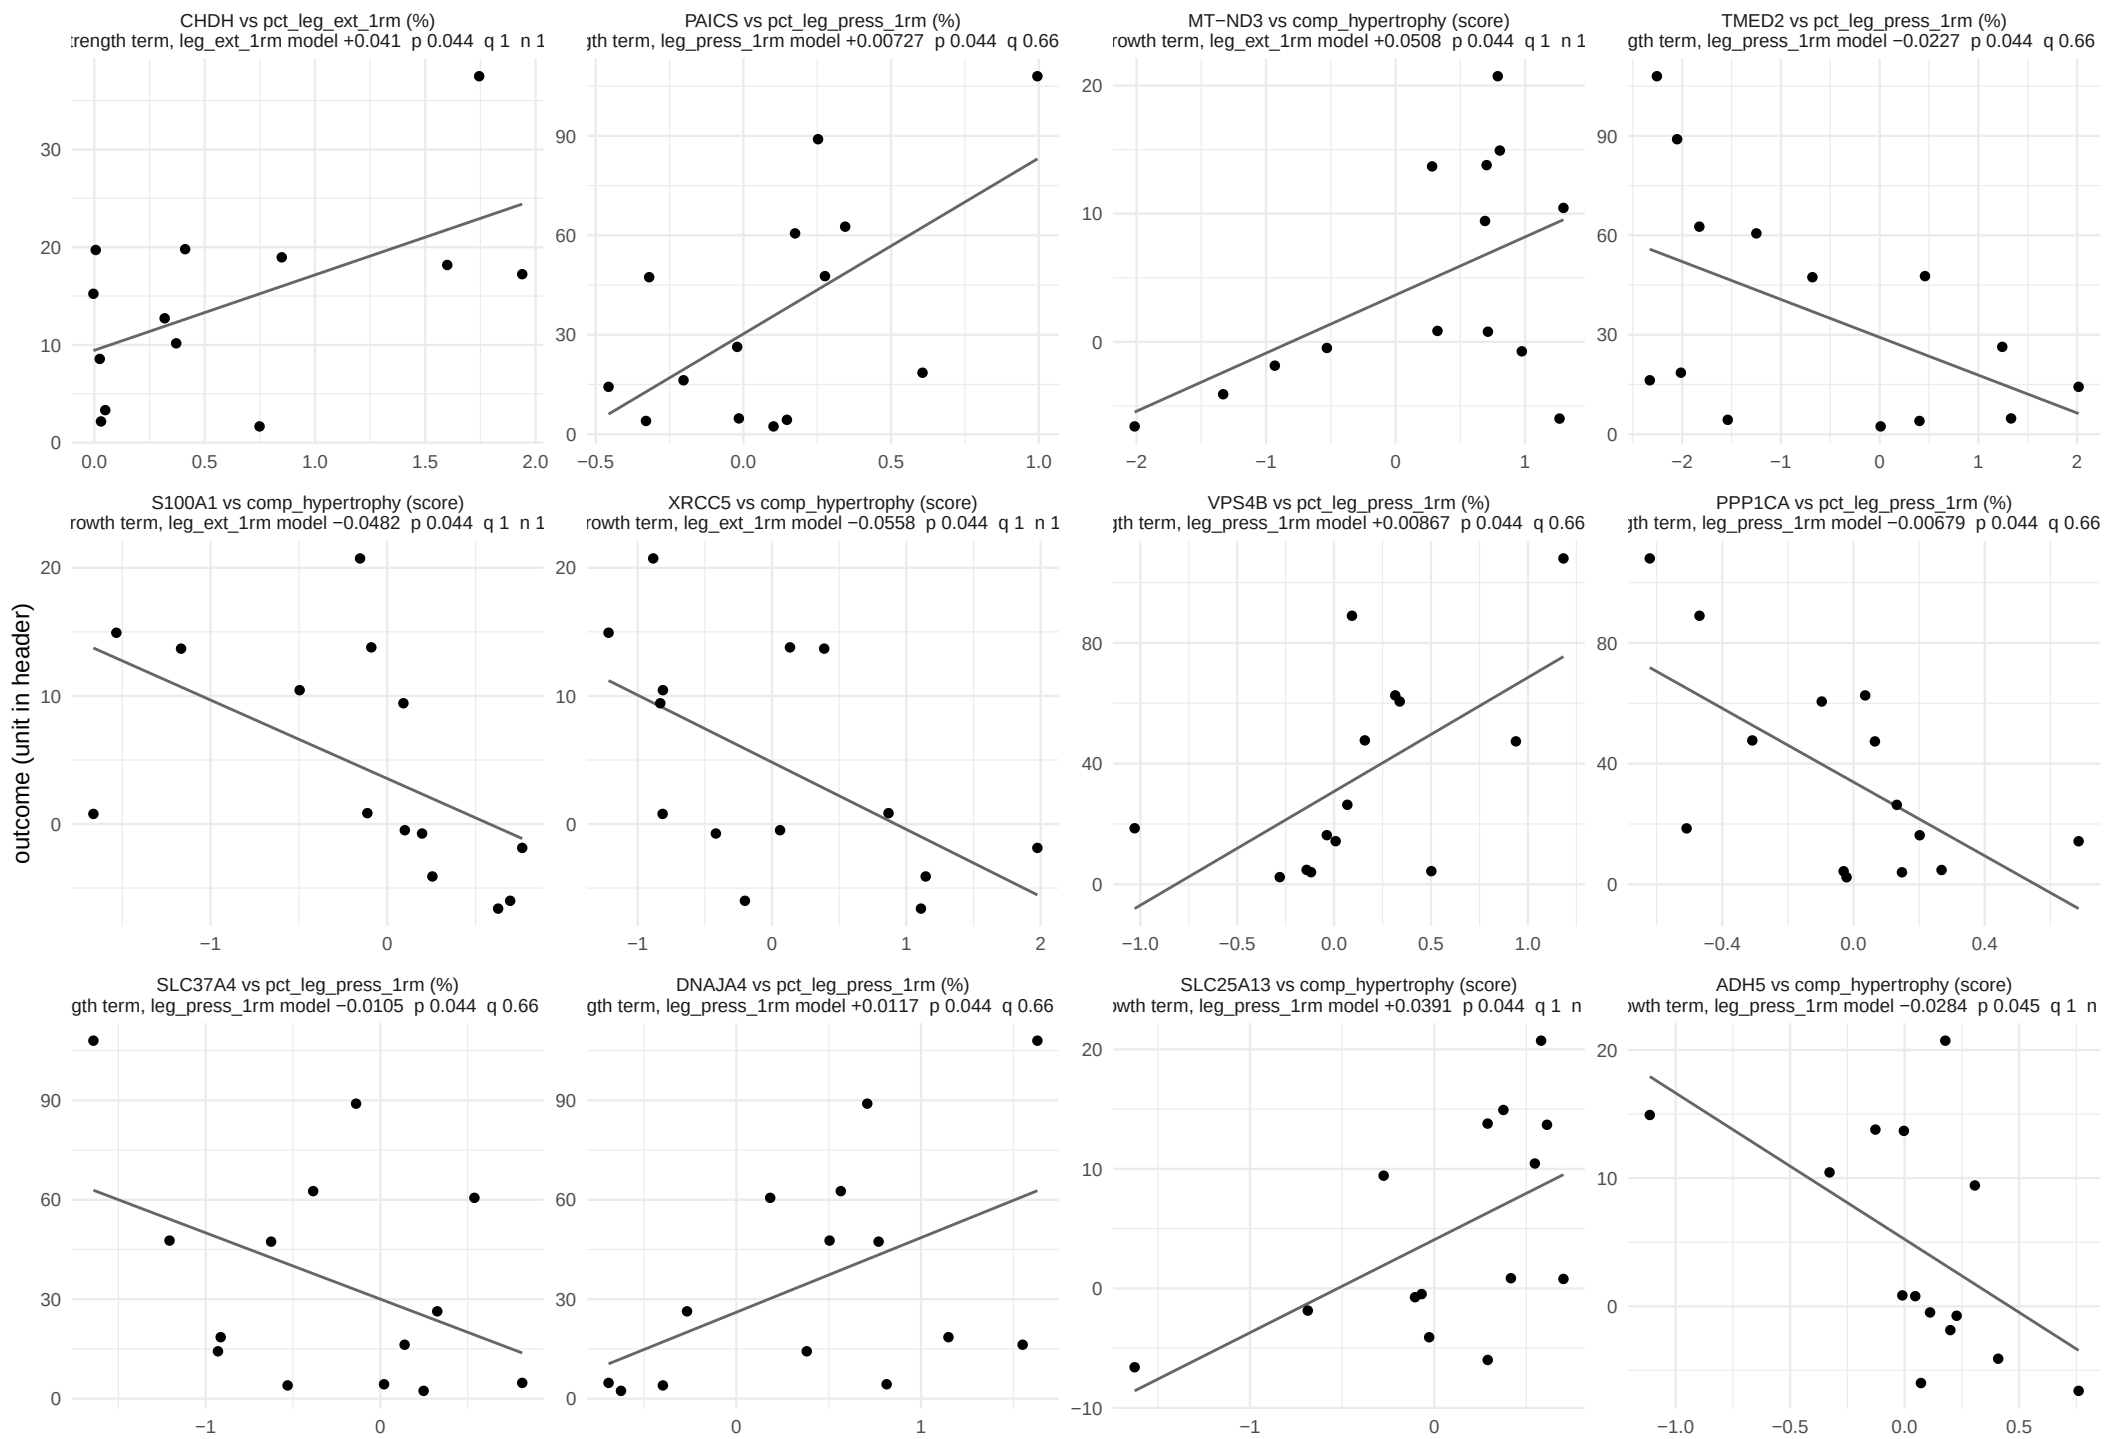

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/01_proteins.xlsx, two_predictor.

Two predictor, training window


288 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 22 of 24.

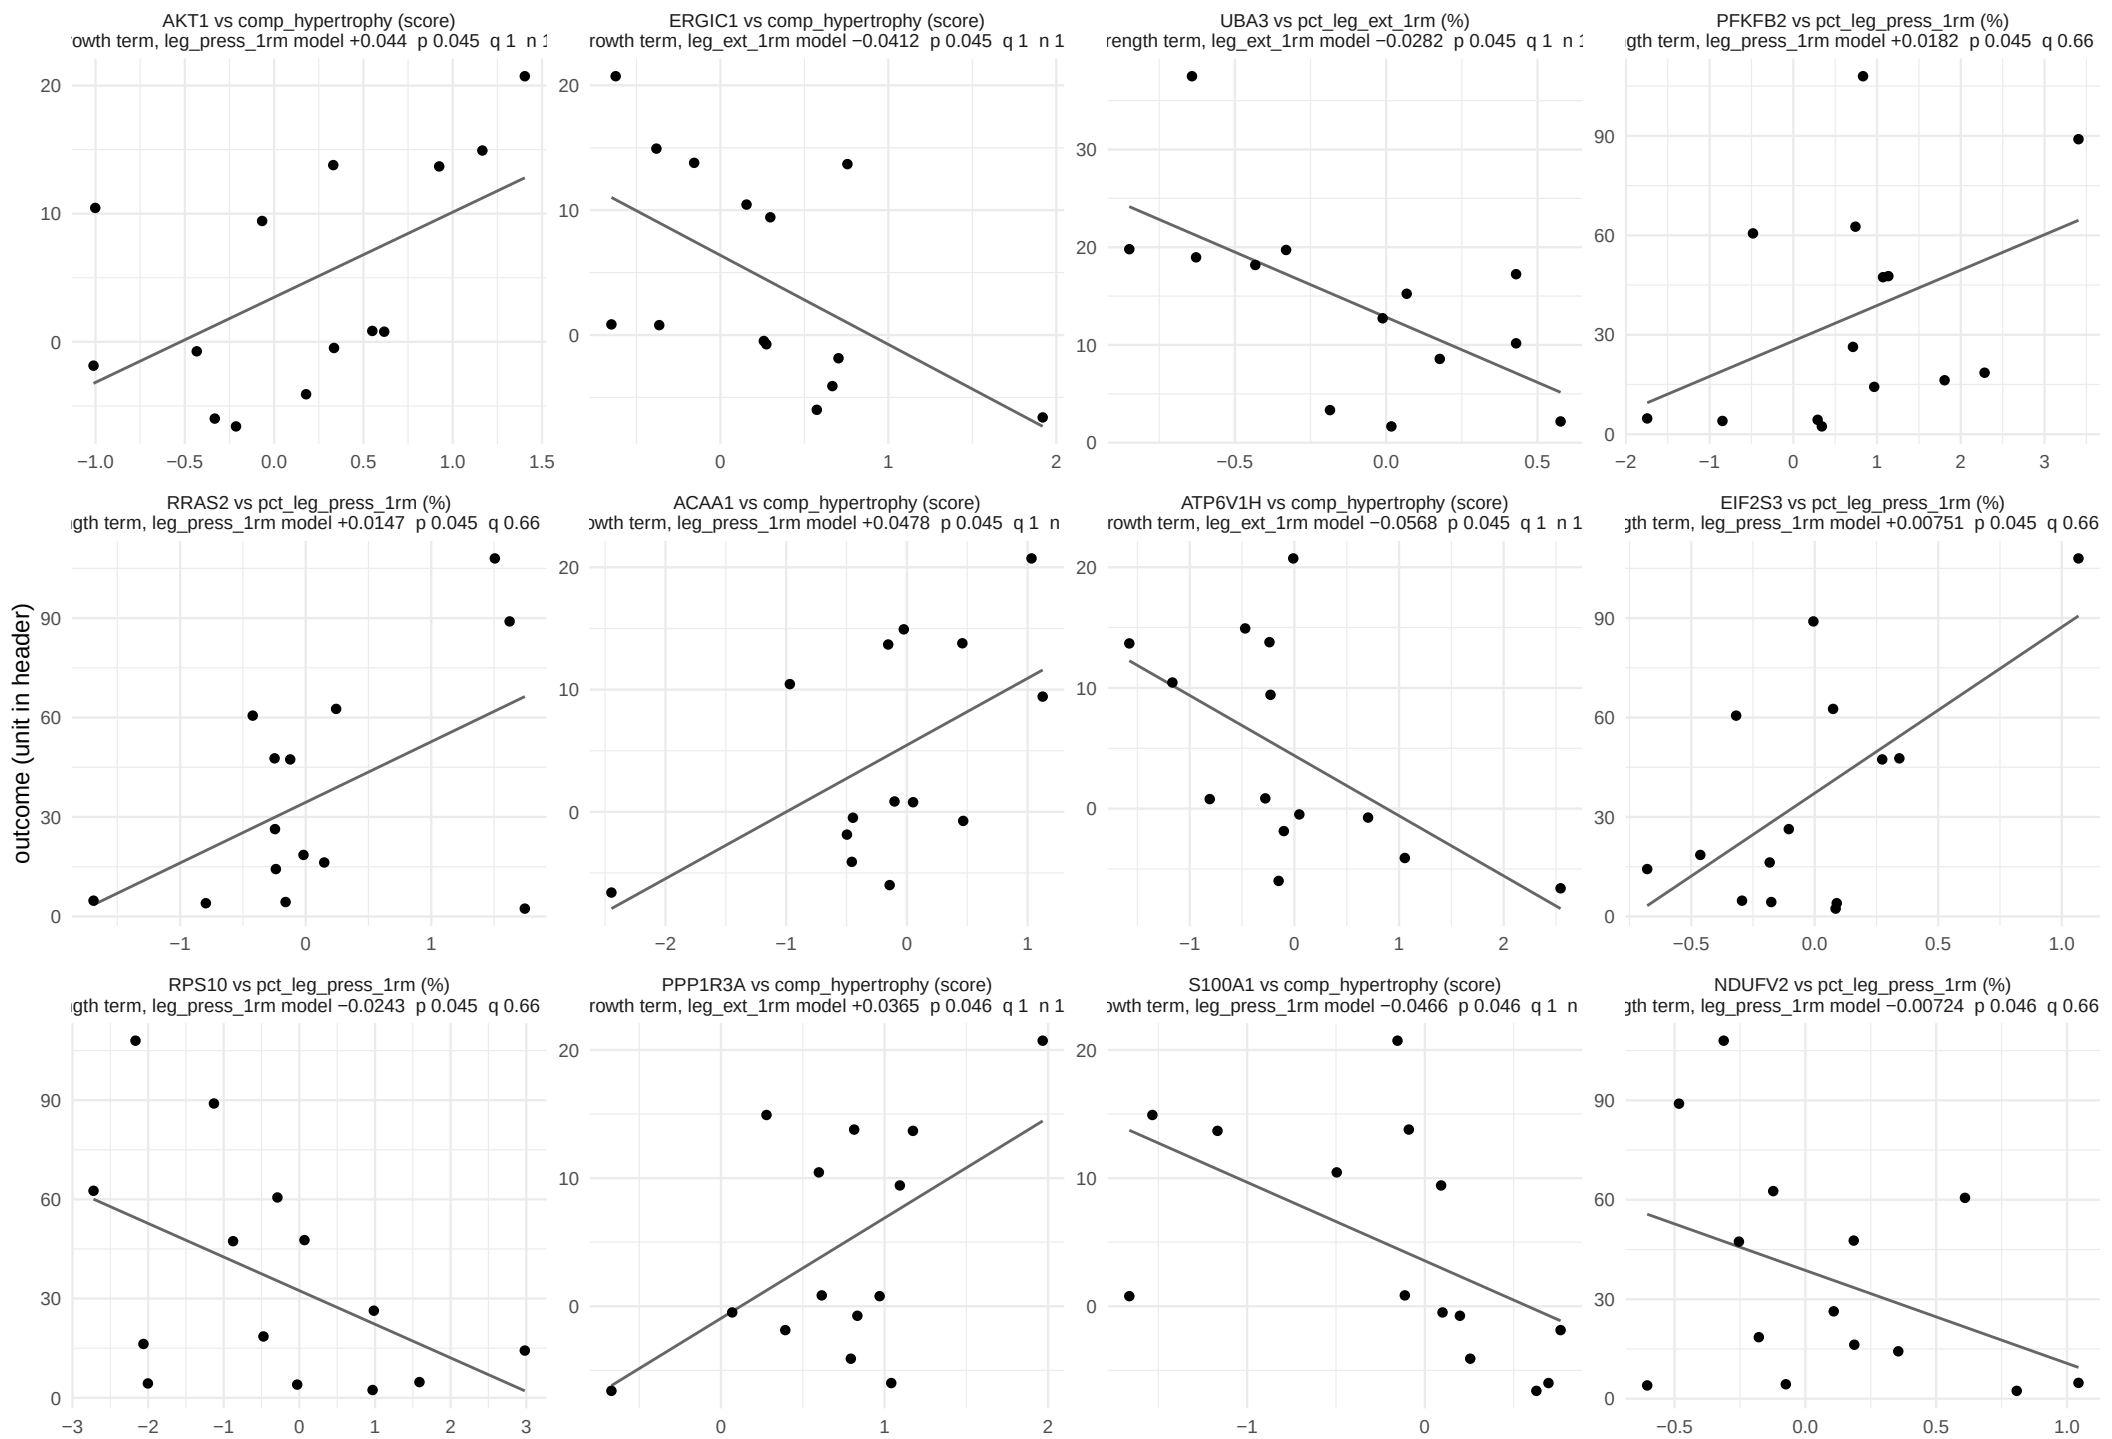

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/01_proteins.xlsx, two_predictor.

Two predictor, training window


288 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 23 of 24.

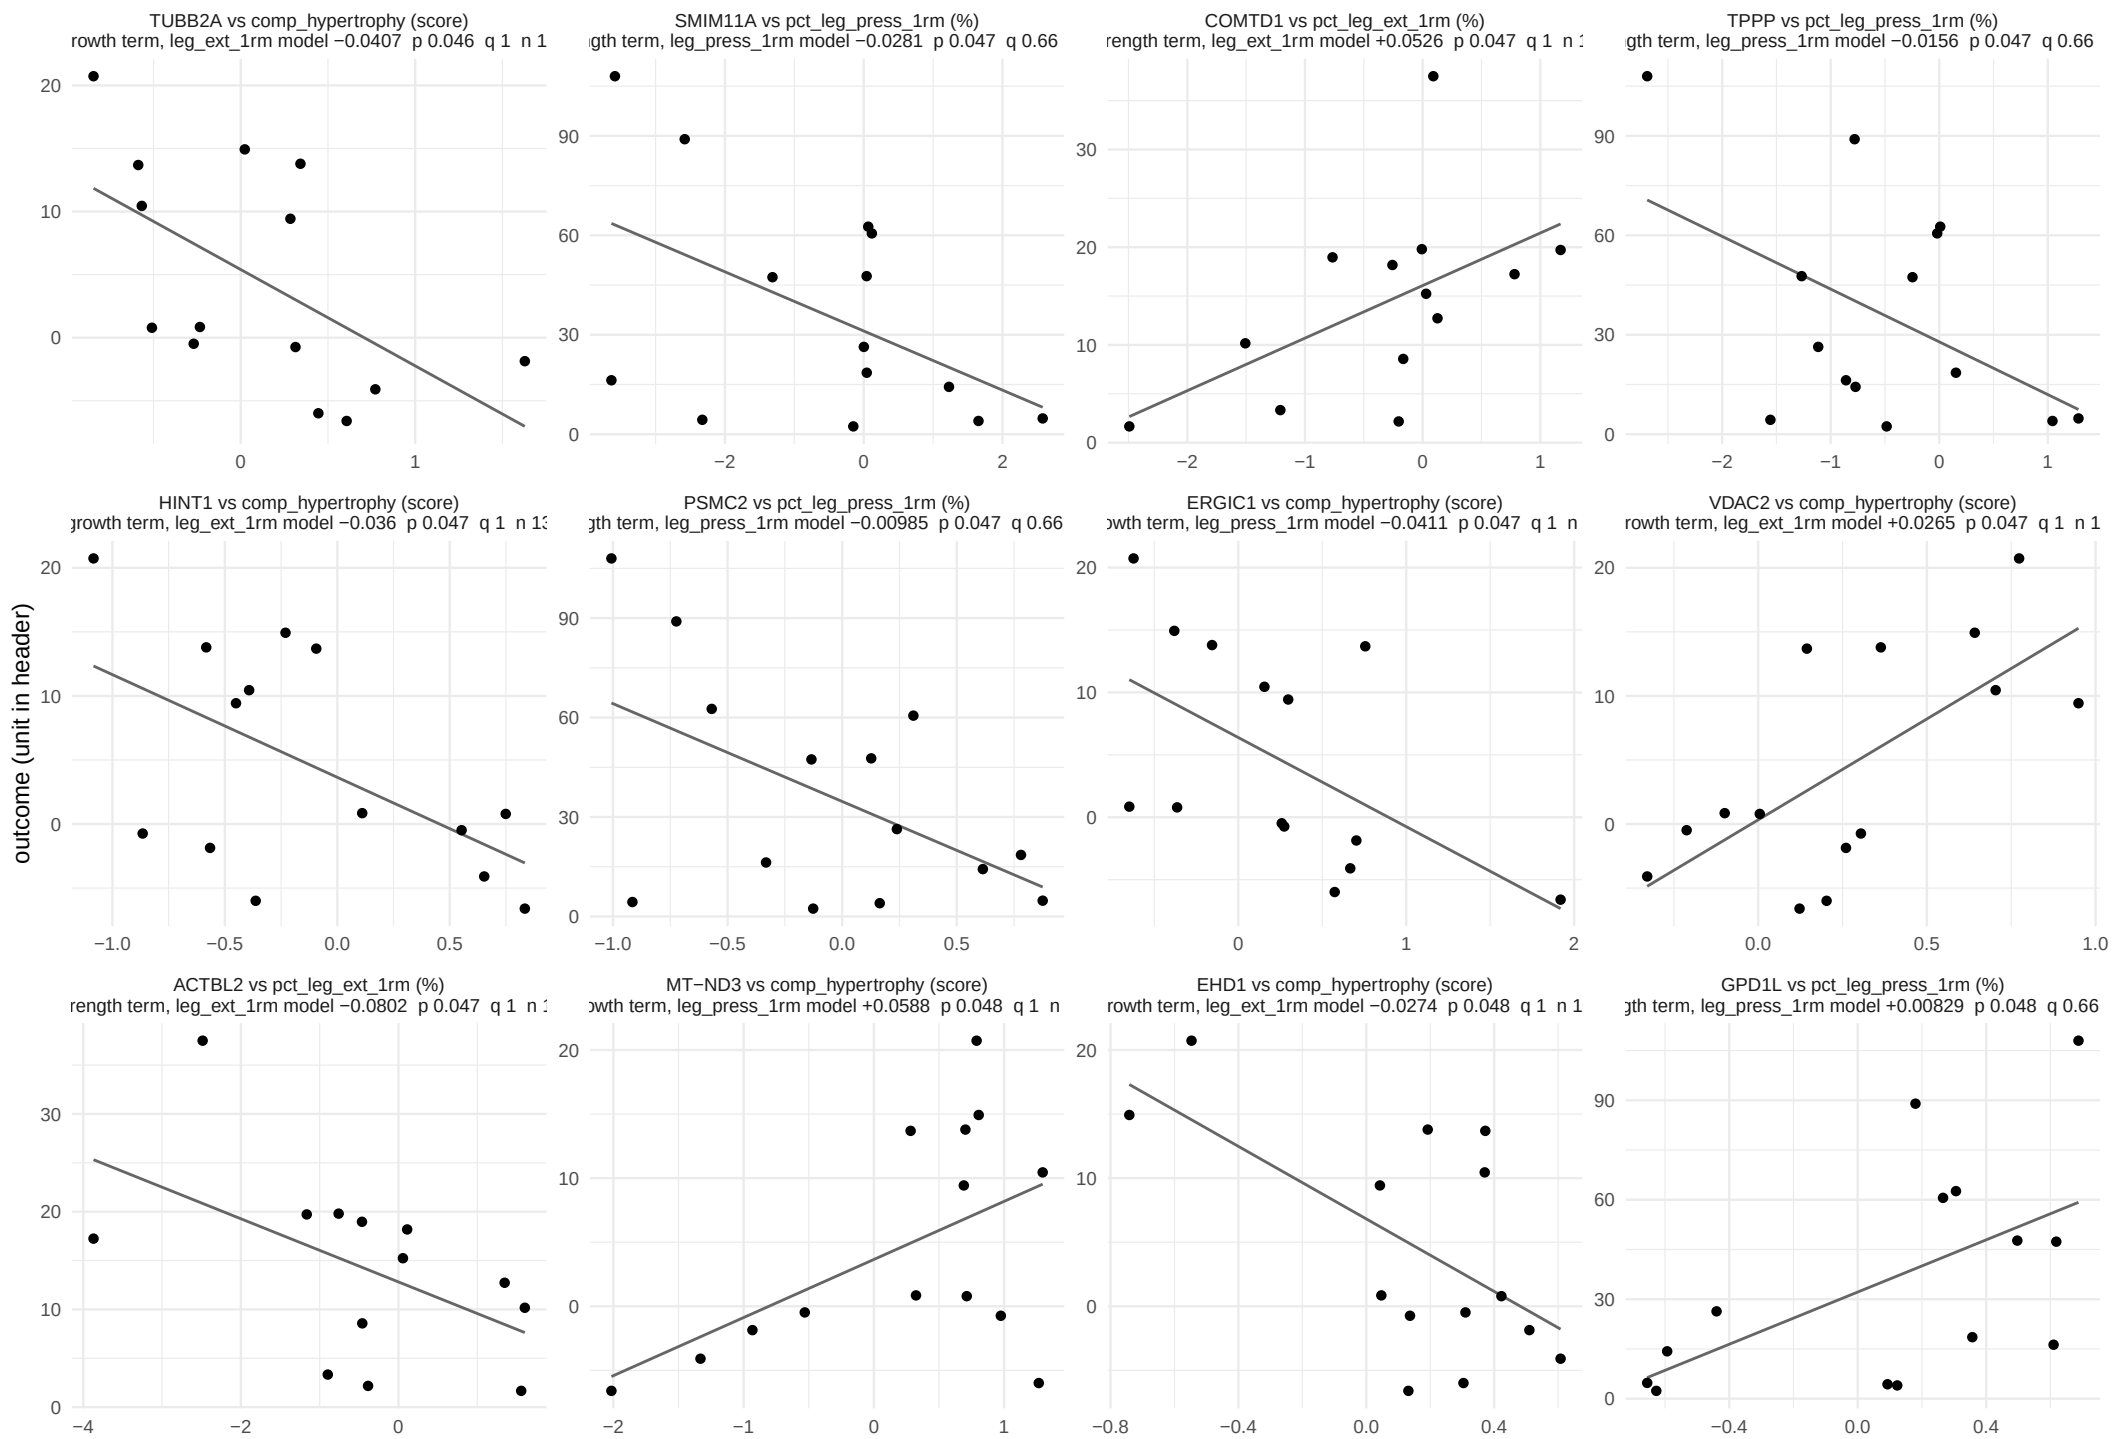

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/01_proteins.xlsx, two_predictor.

Two predictor, training window


288 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 24 of 24.

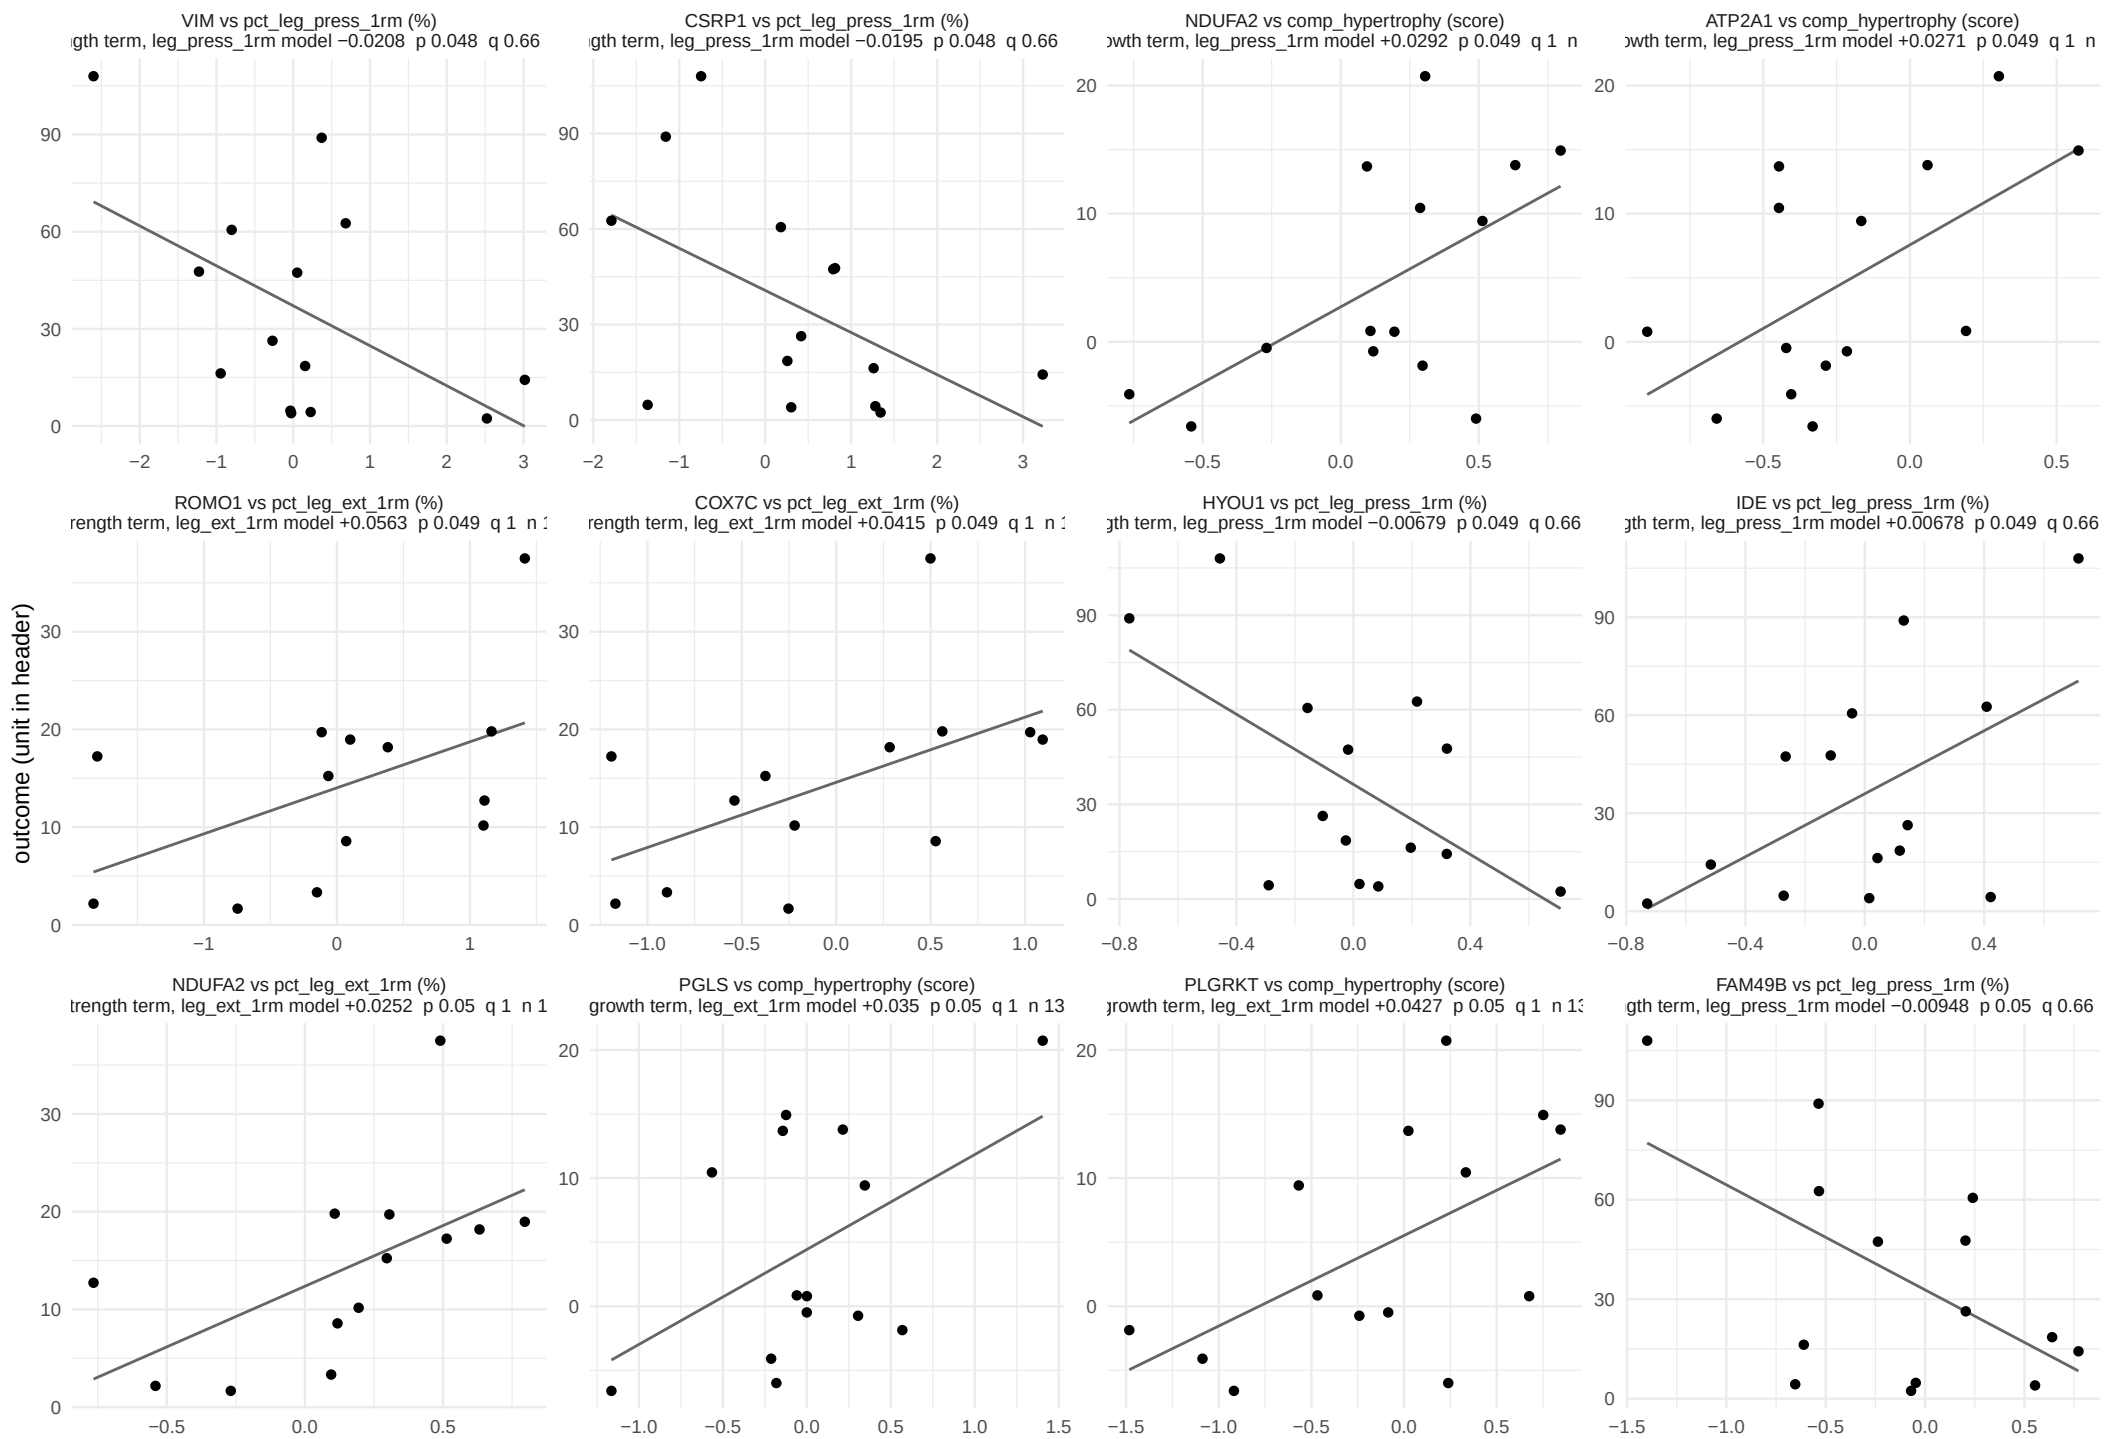

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/01_proteins.xlsx, two_predictor.

Two predictor, baseline window


391 of 7600 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 1 of 33.

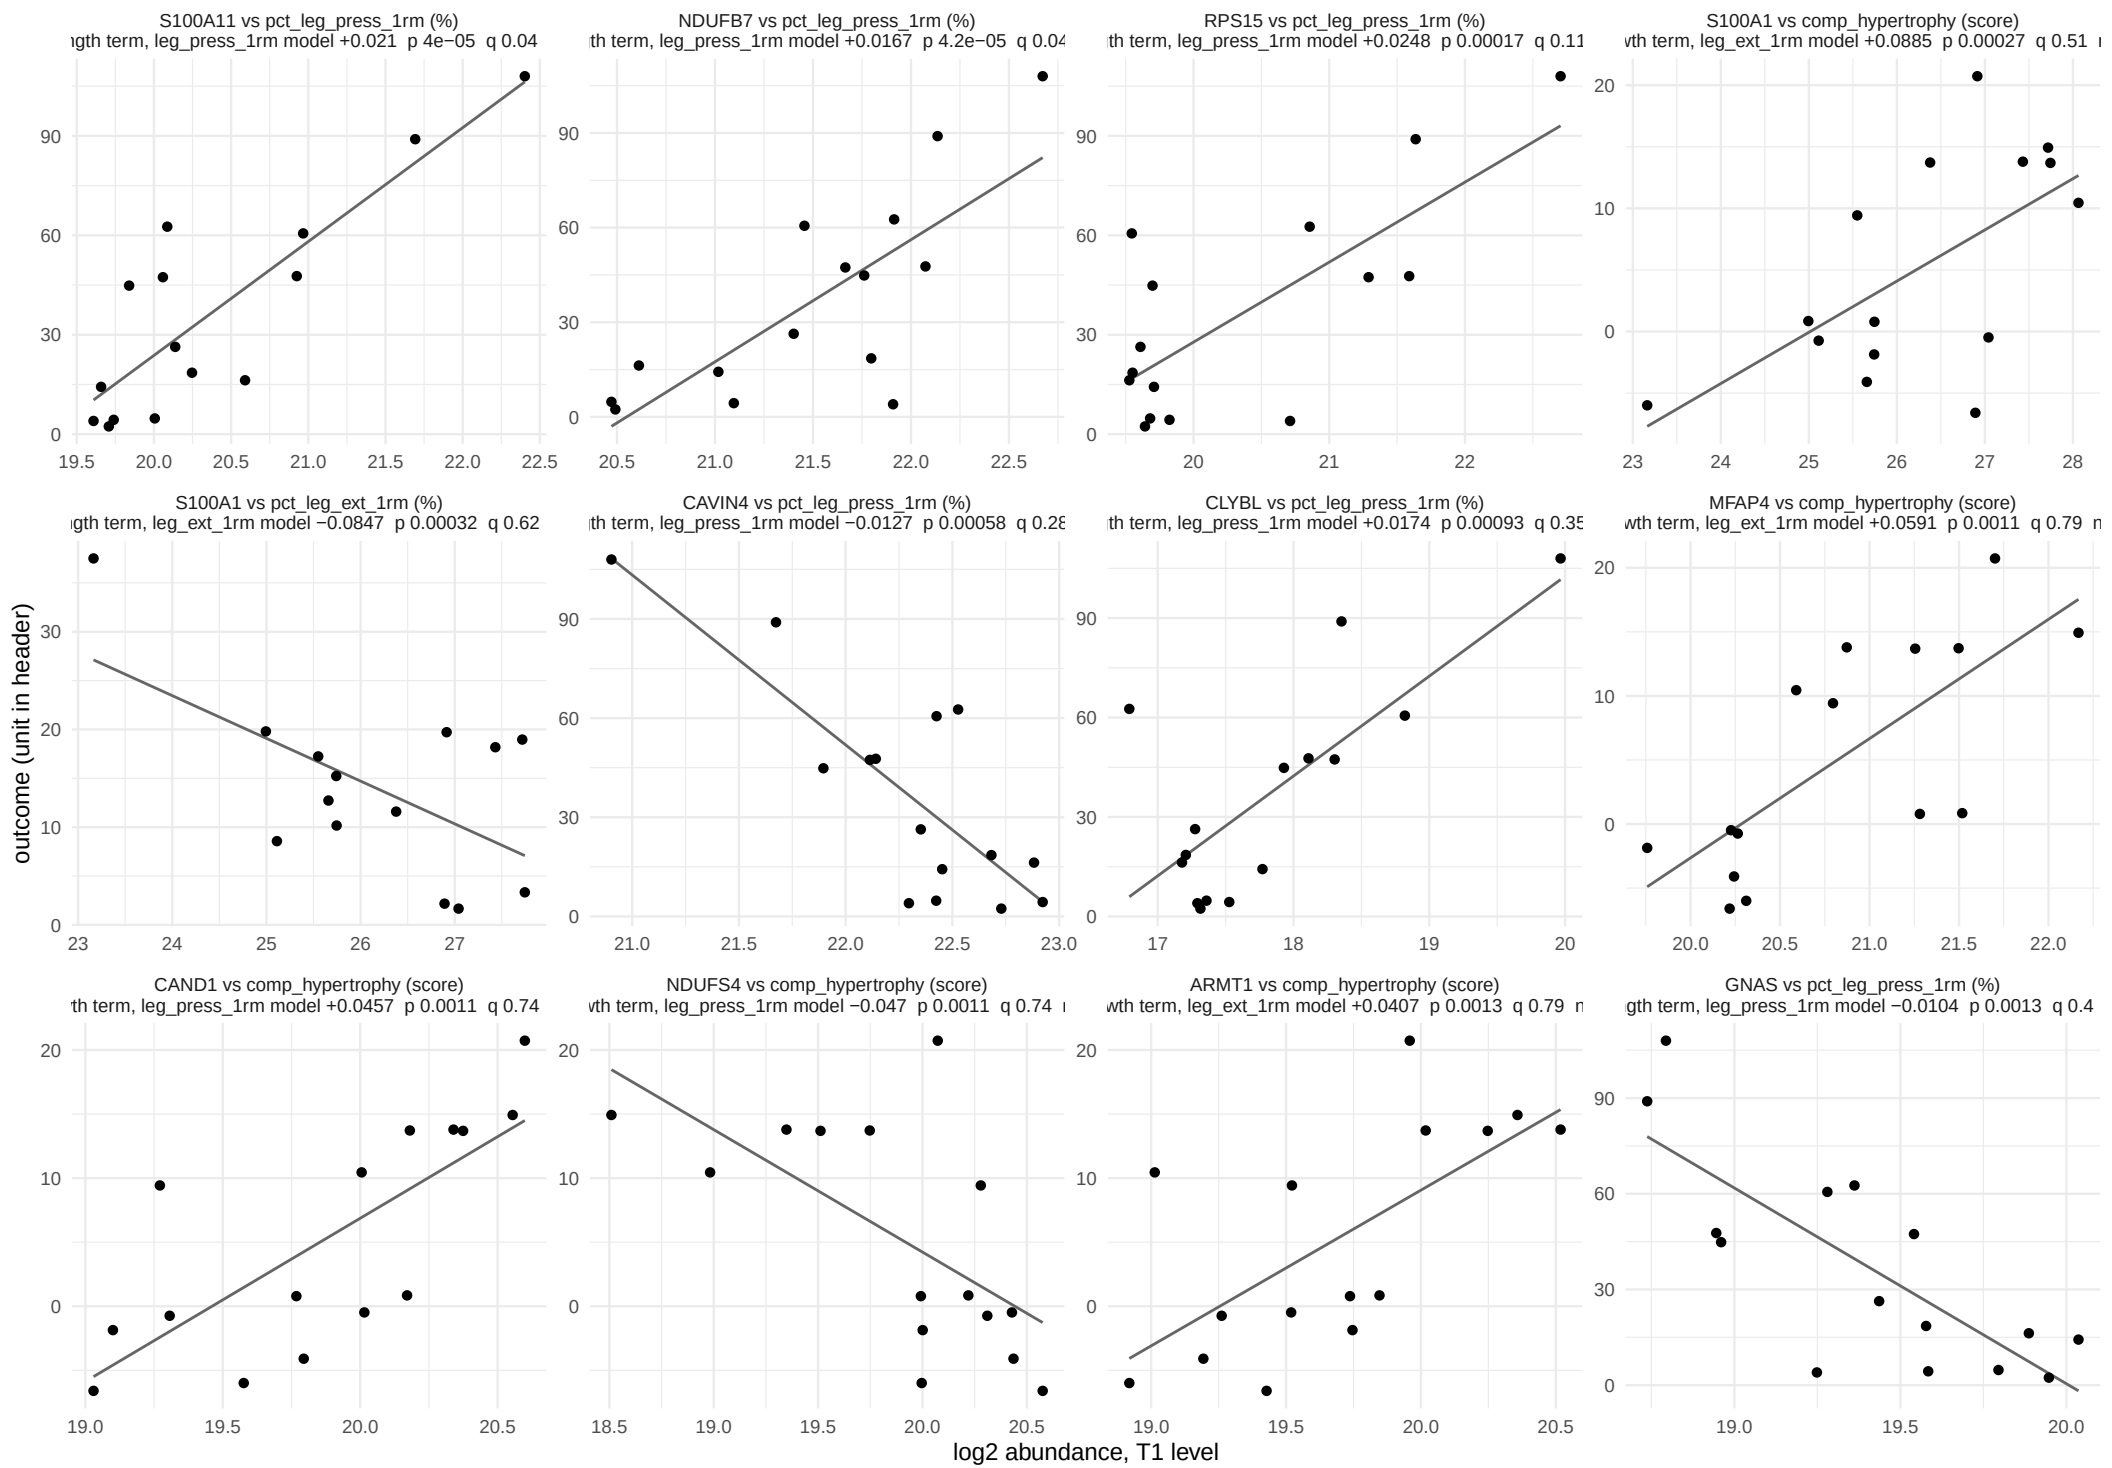

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/01_proteins.xlsx, two_predictor.

Two predictor, baseline window


391 of 7600 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 2 of 33.

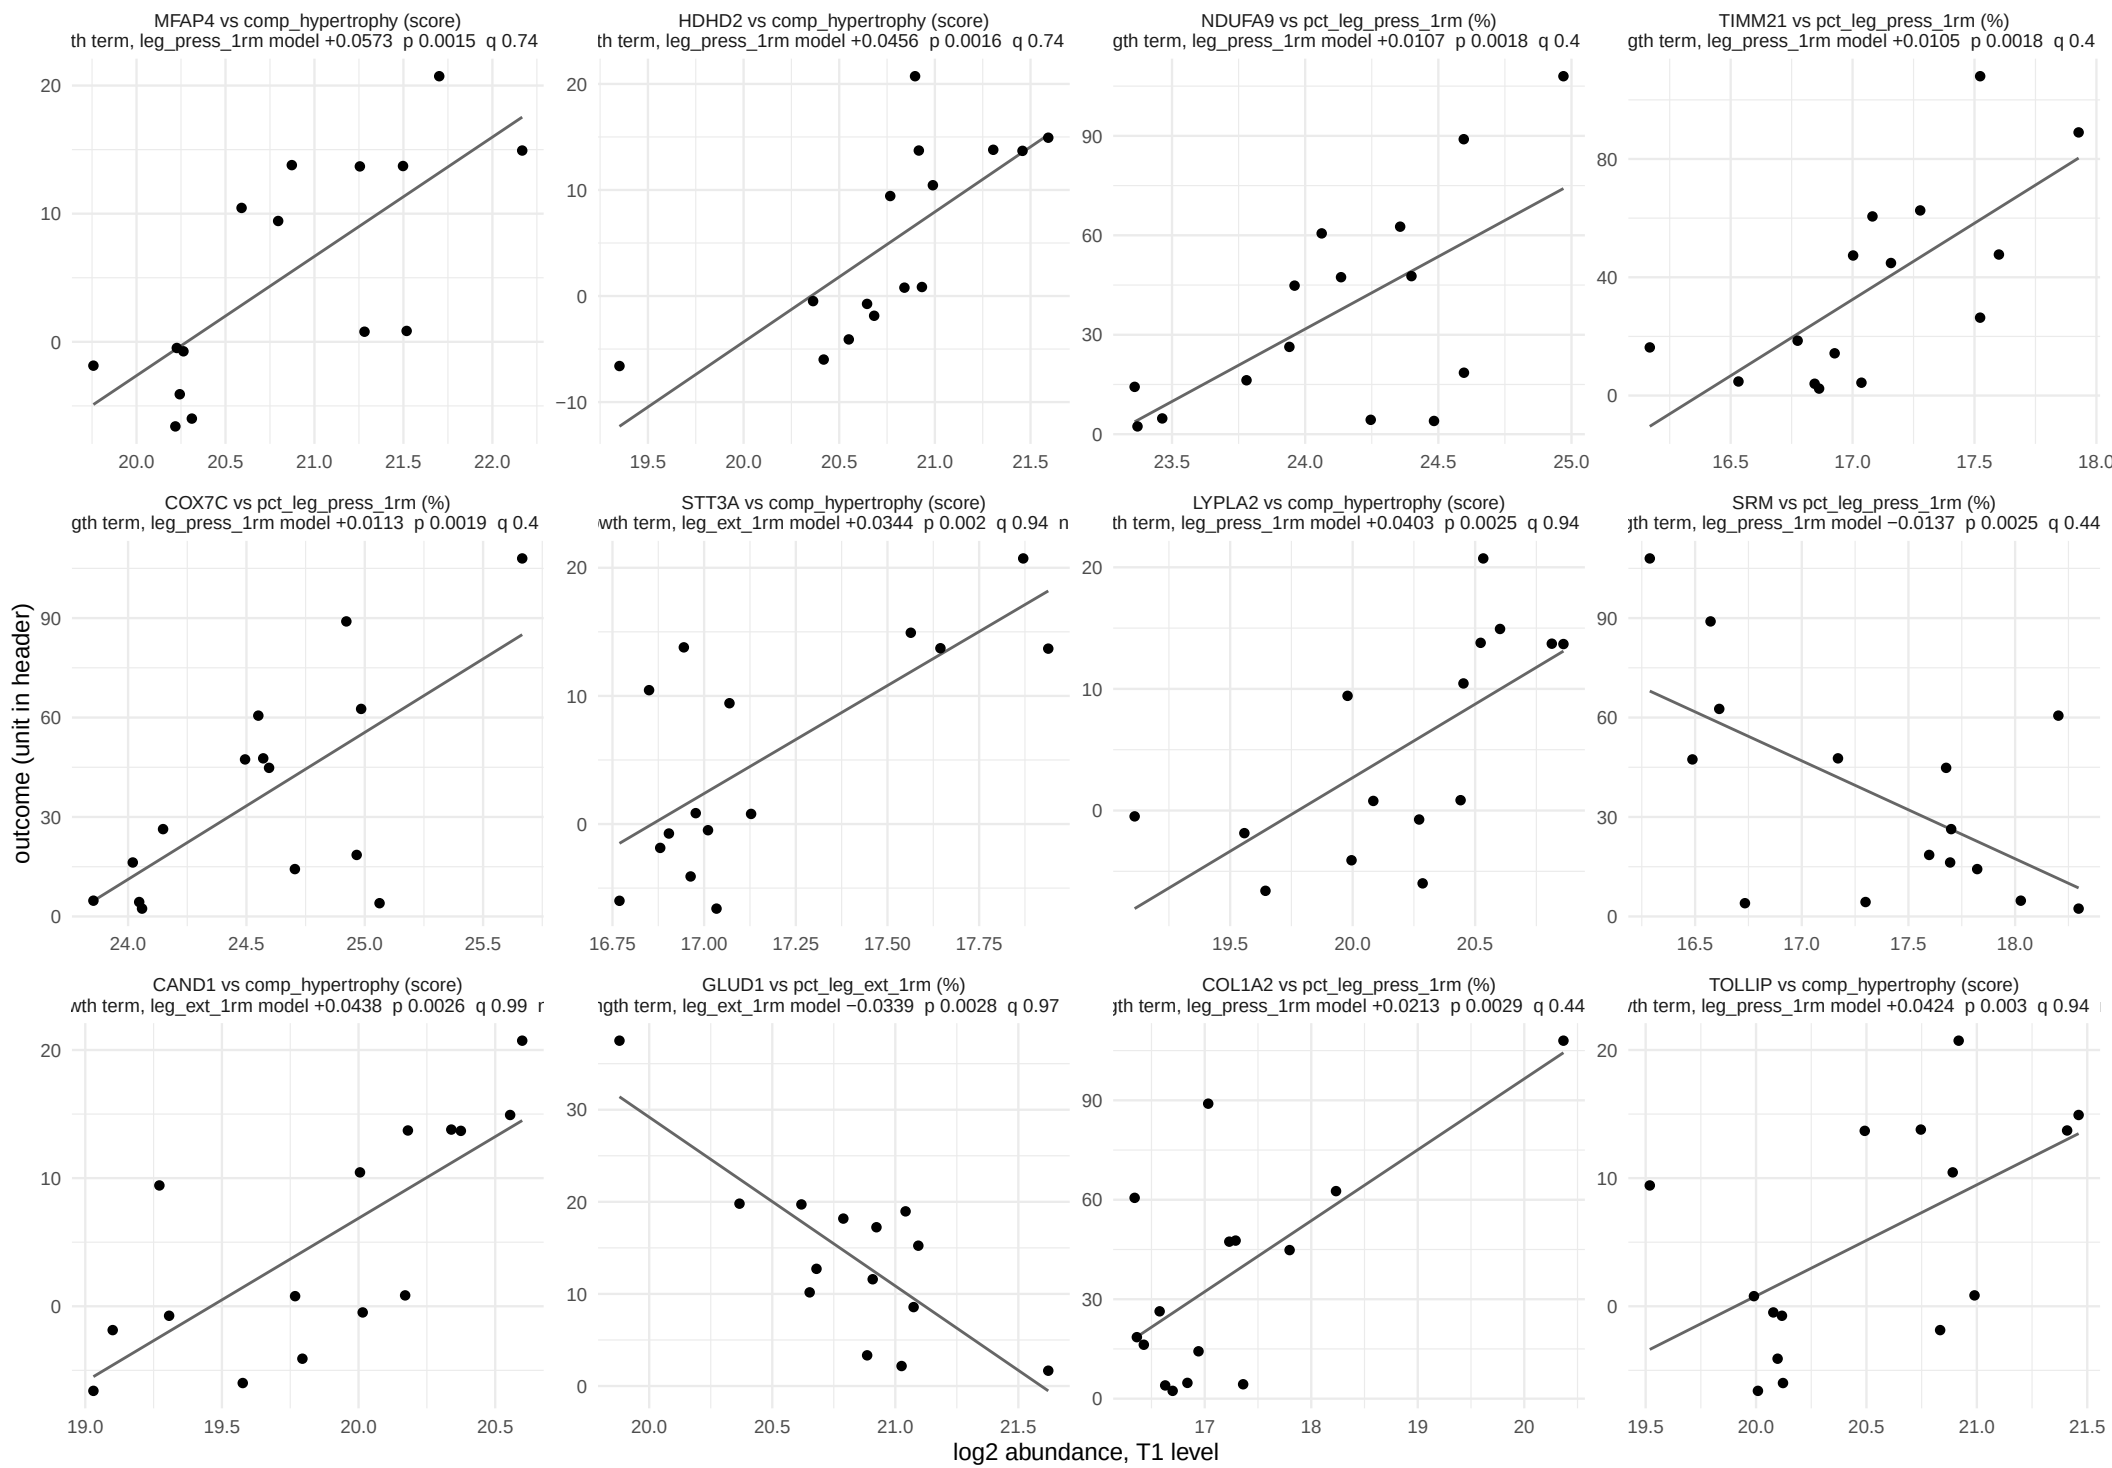

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/01_proteins.xlsx, two_predictor.

Two predictor, baseline window


391 of 7600 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 3 of 33.

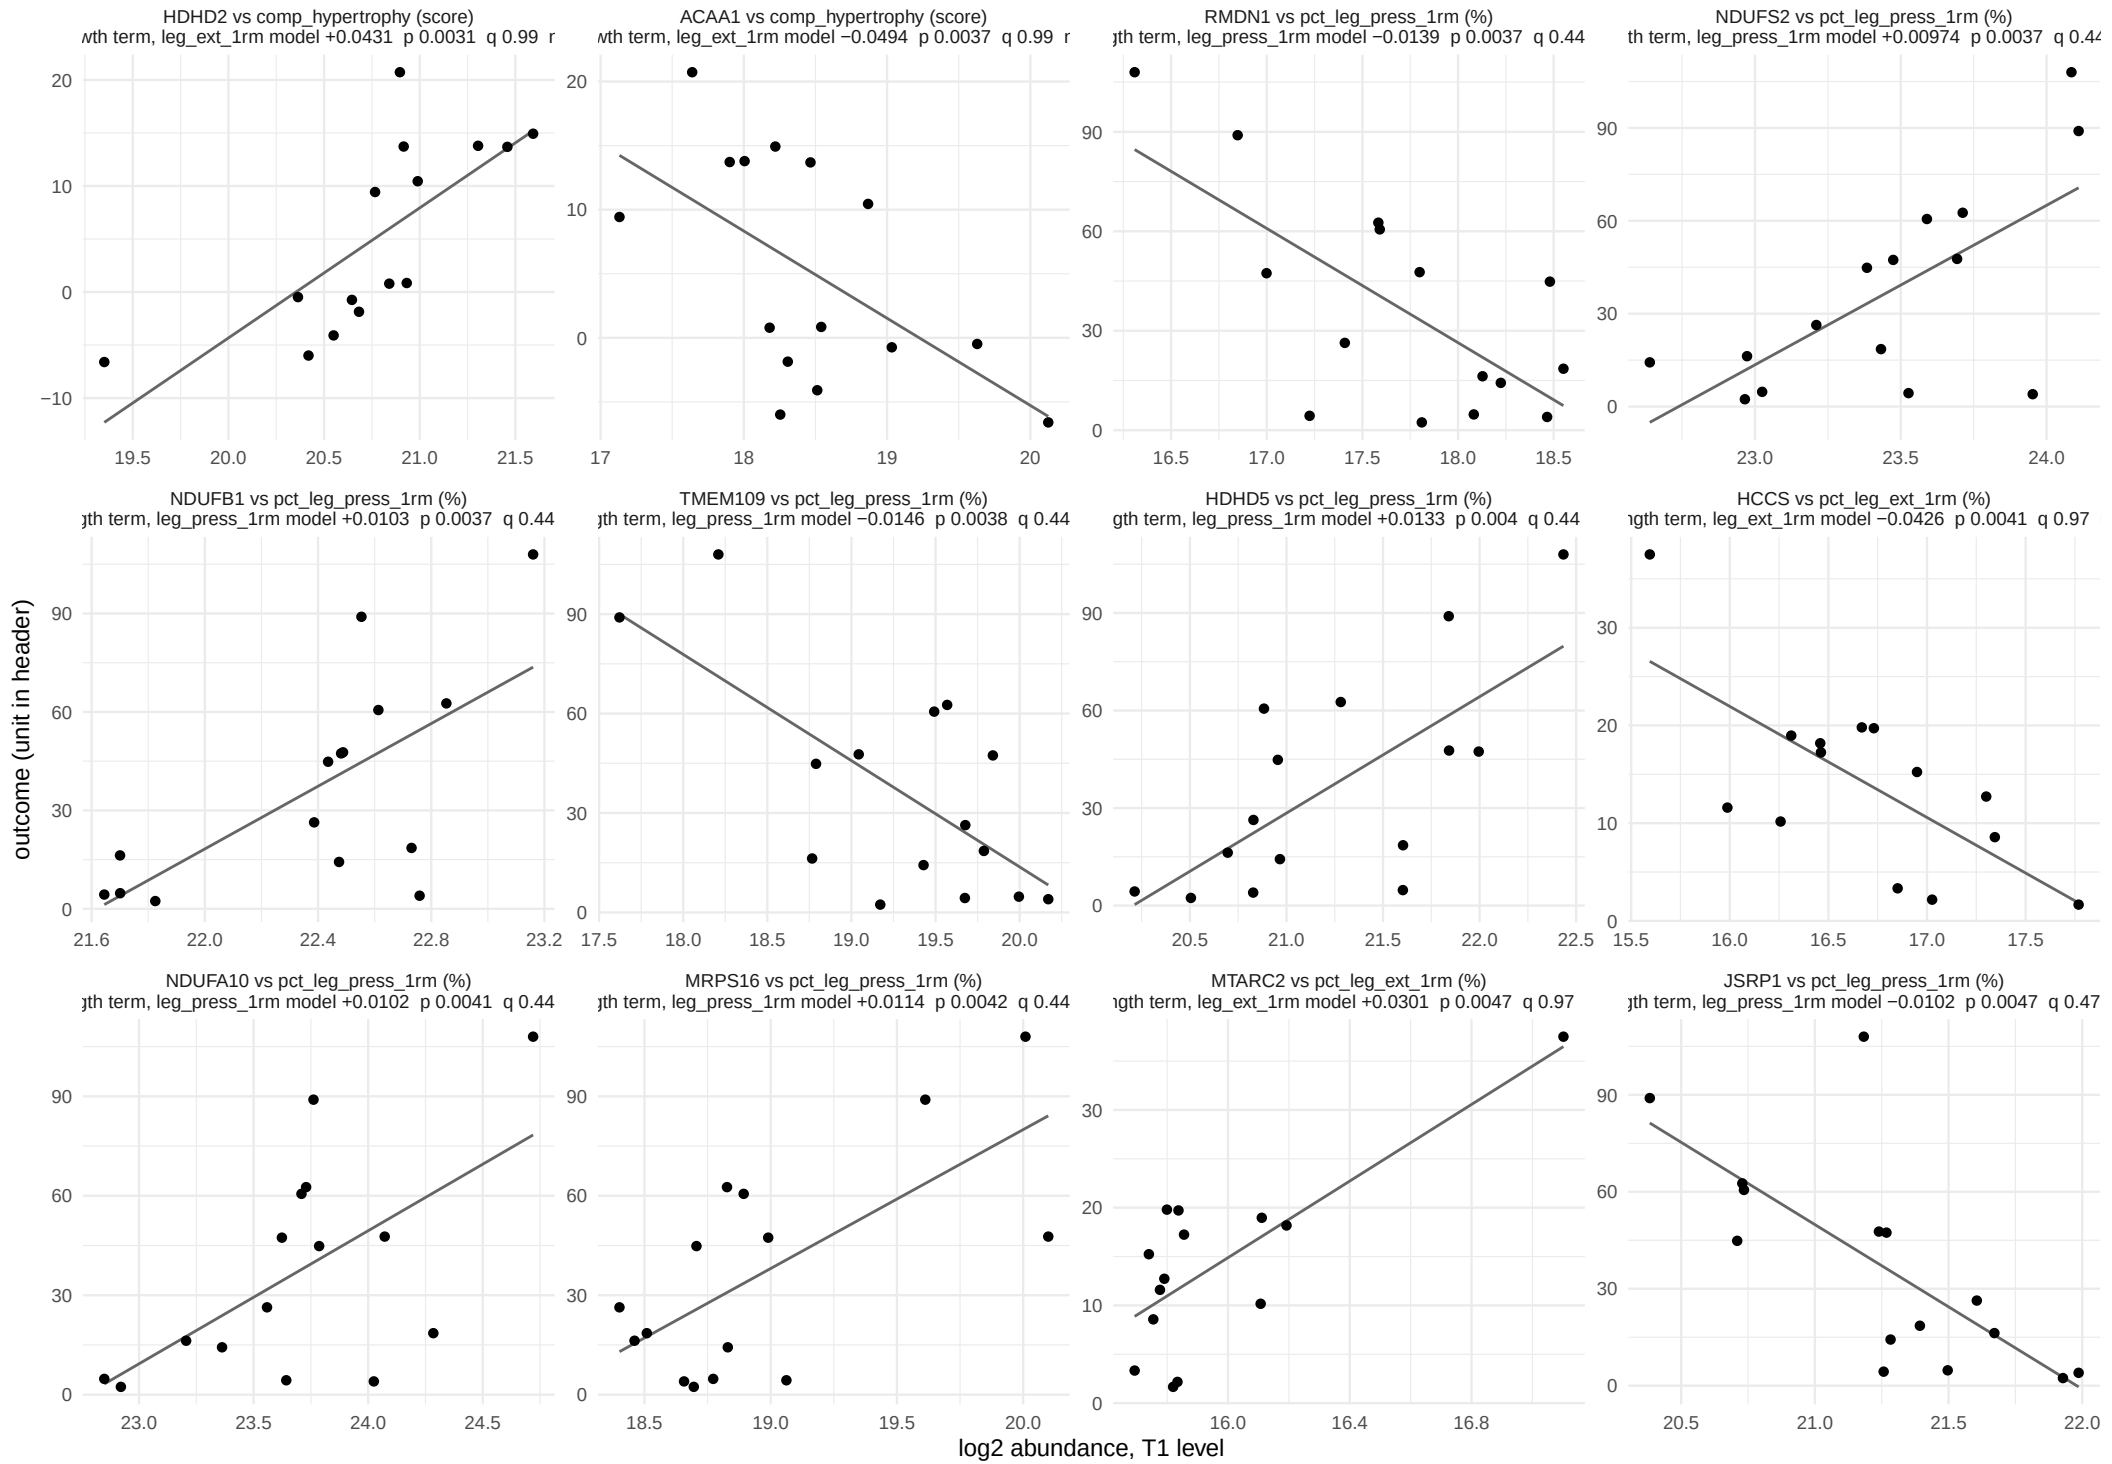

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/01_proteins.xlsx, two_predictor.

Two predictor, baseline window


391 of 7600 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 4 of 33.

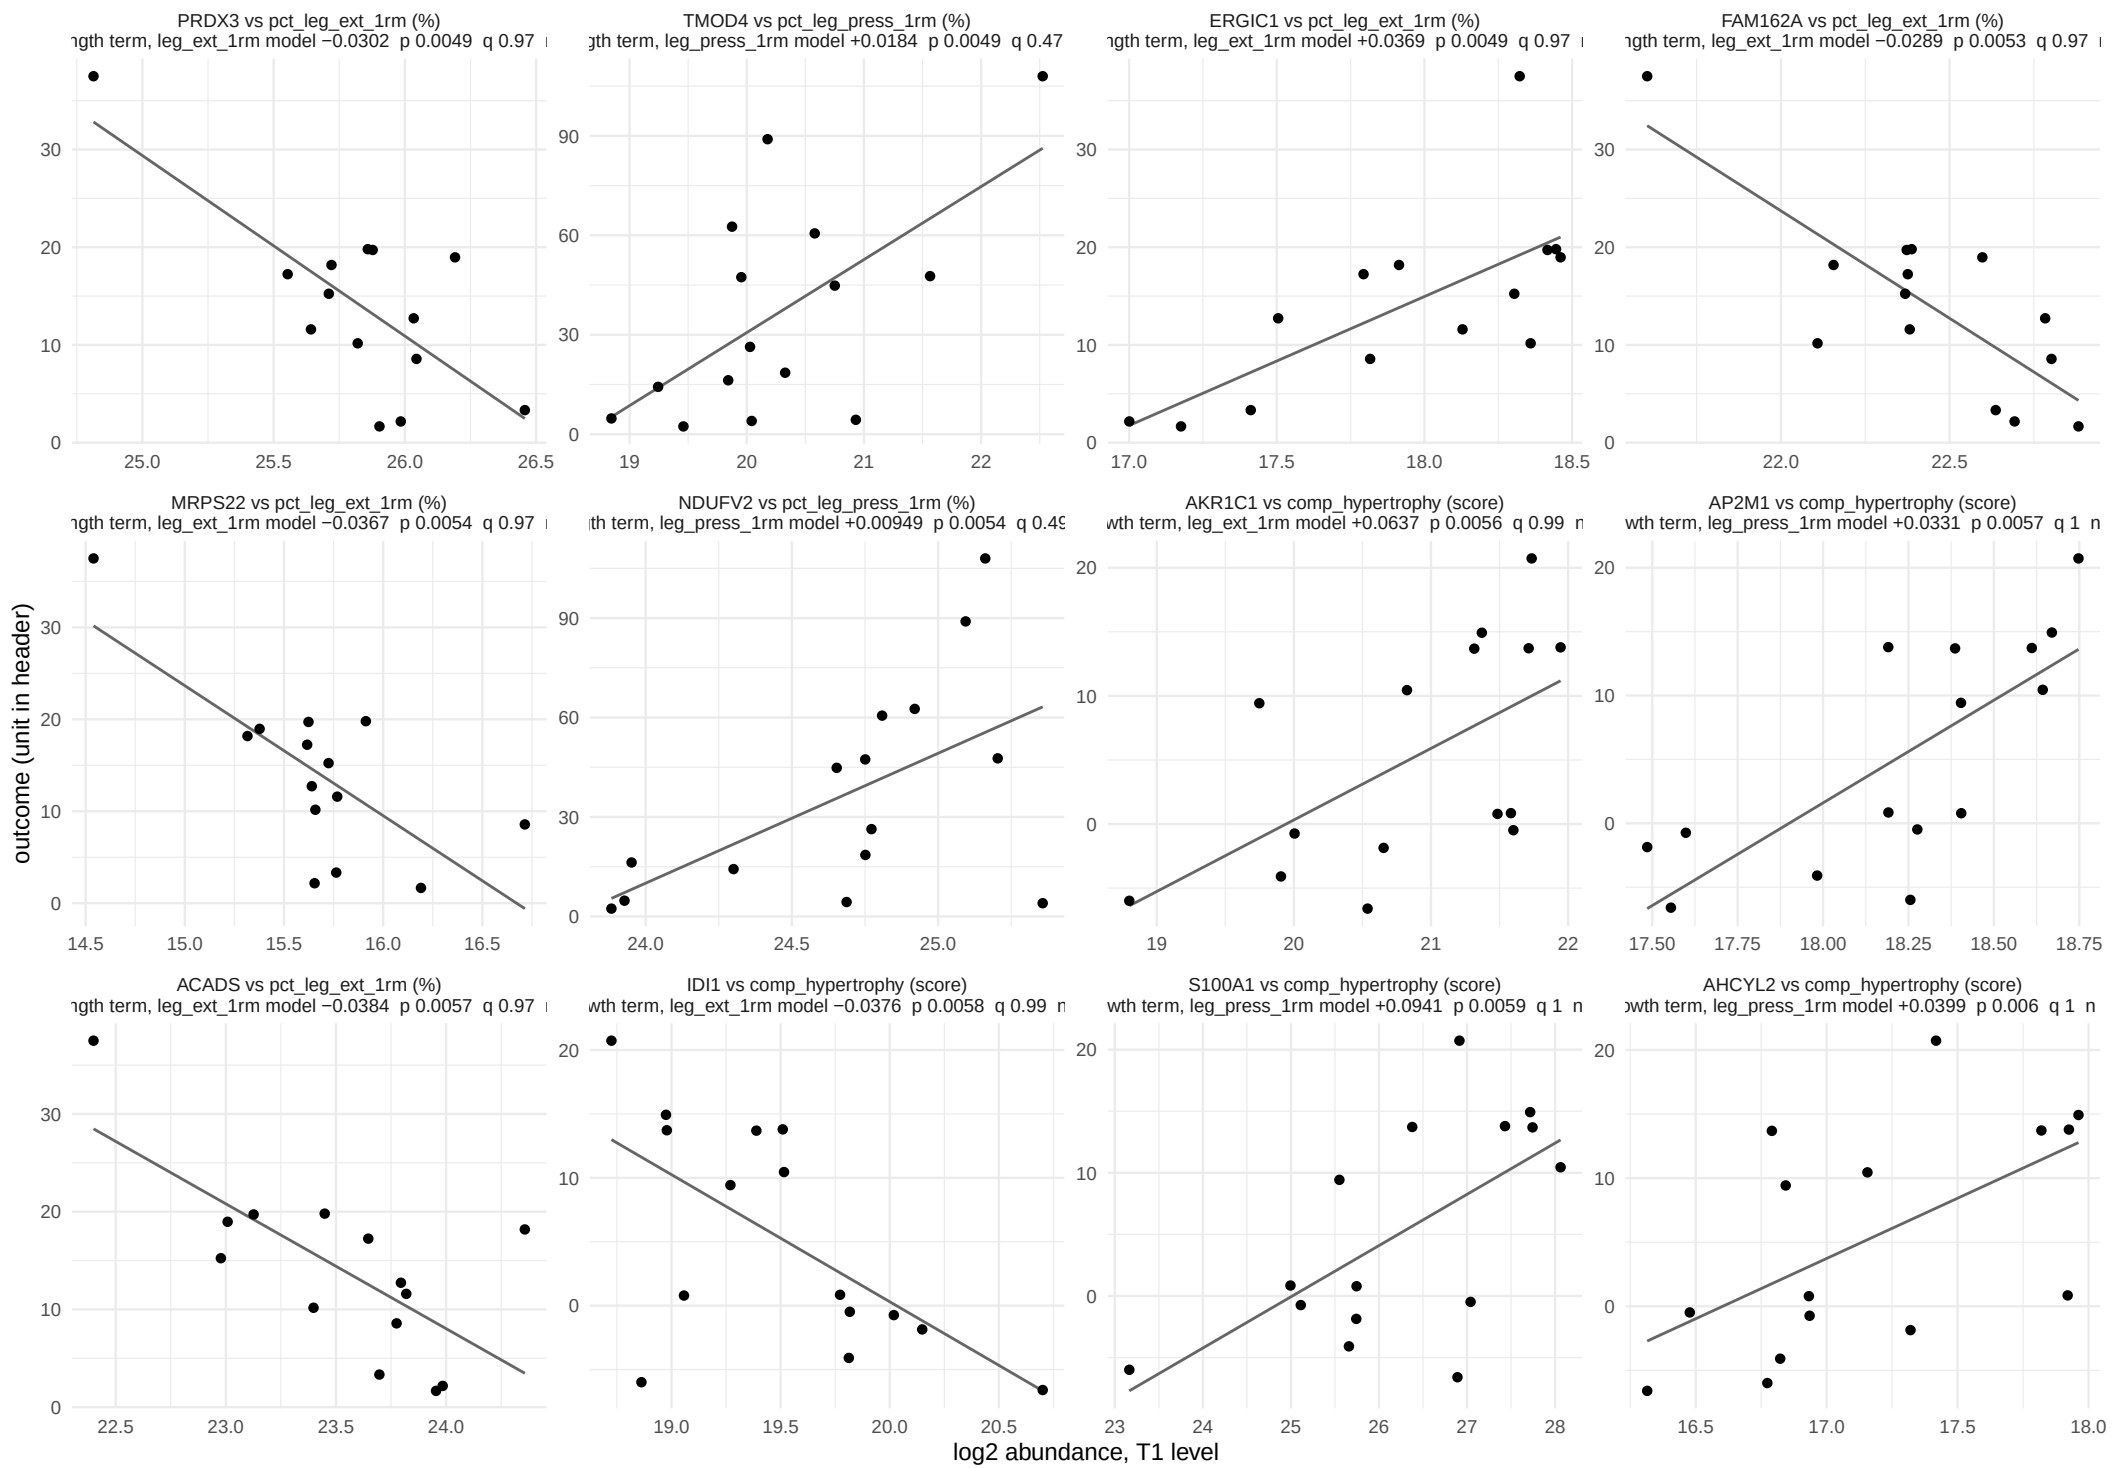

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/01_proteins.xlsx, two_predictor.

Two predictor, baseline window


391 of 7600 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 5 of 33.

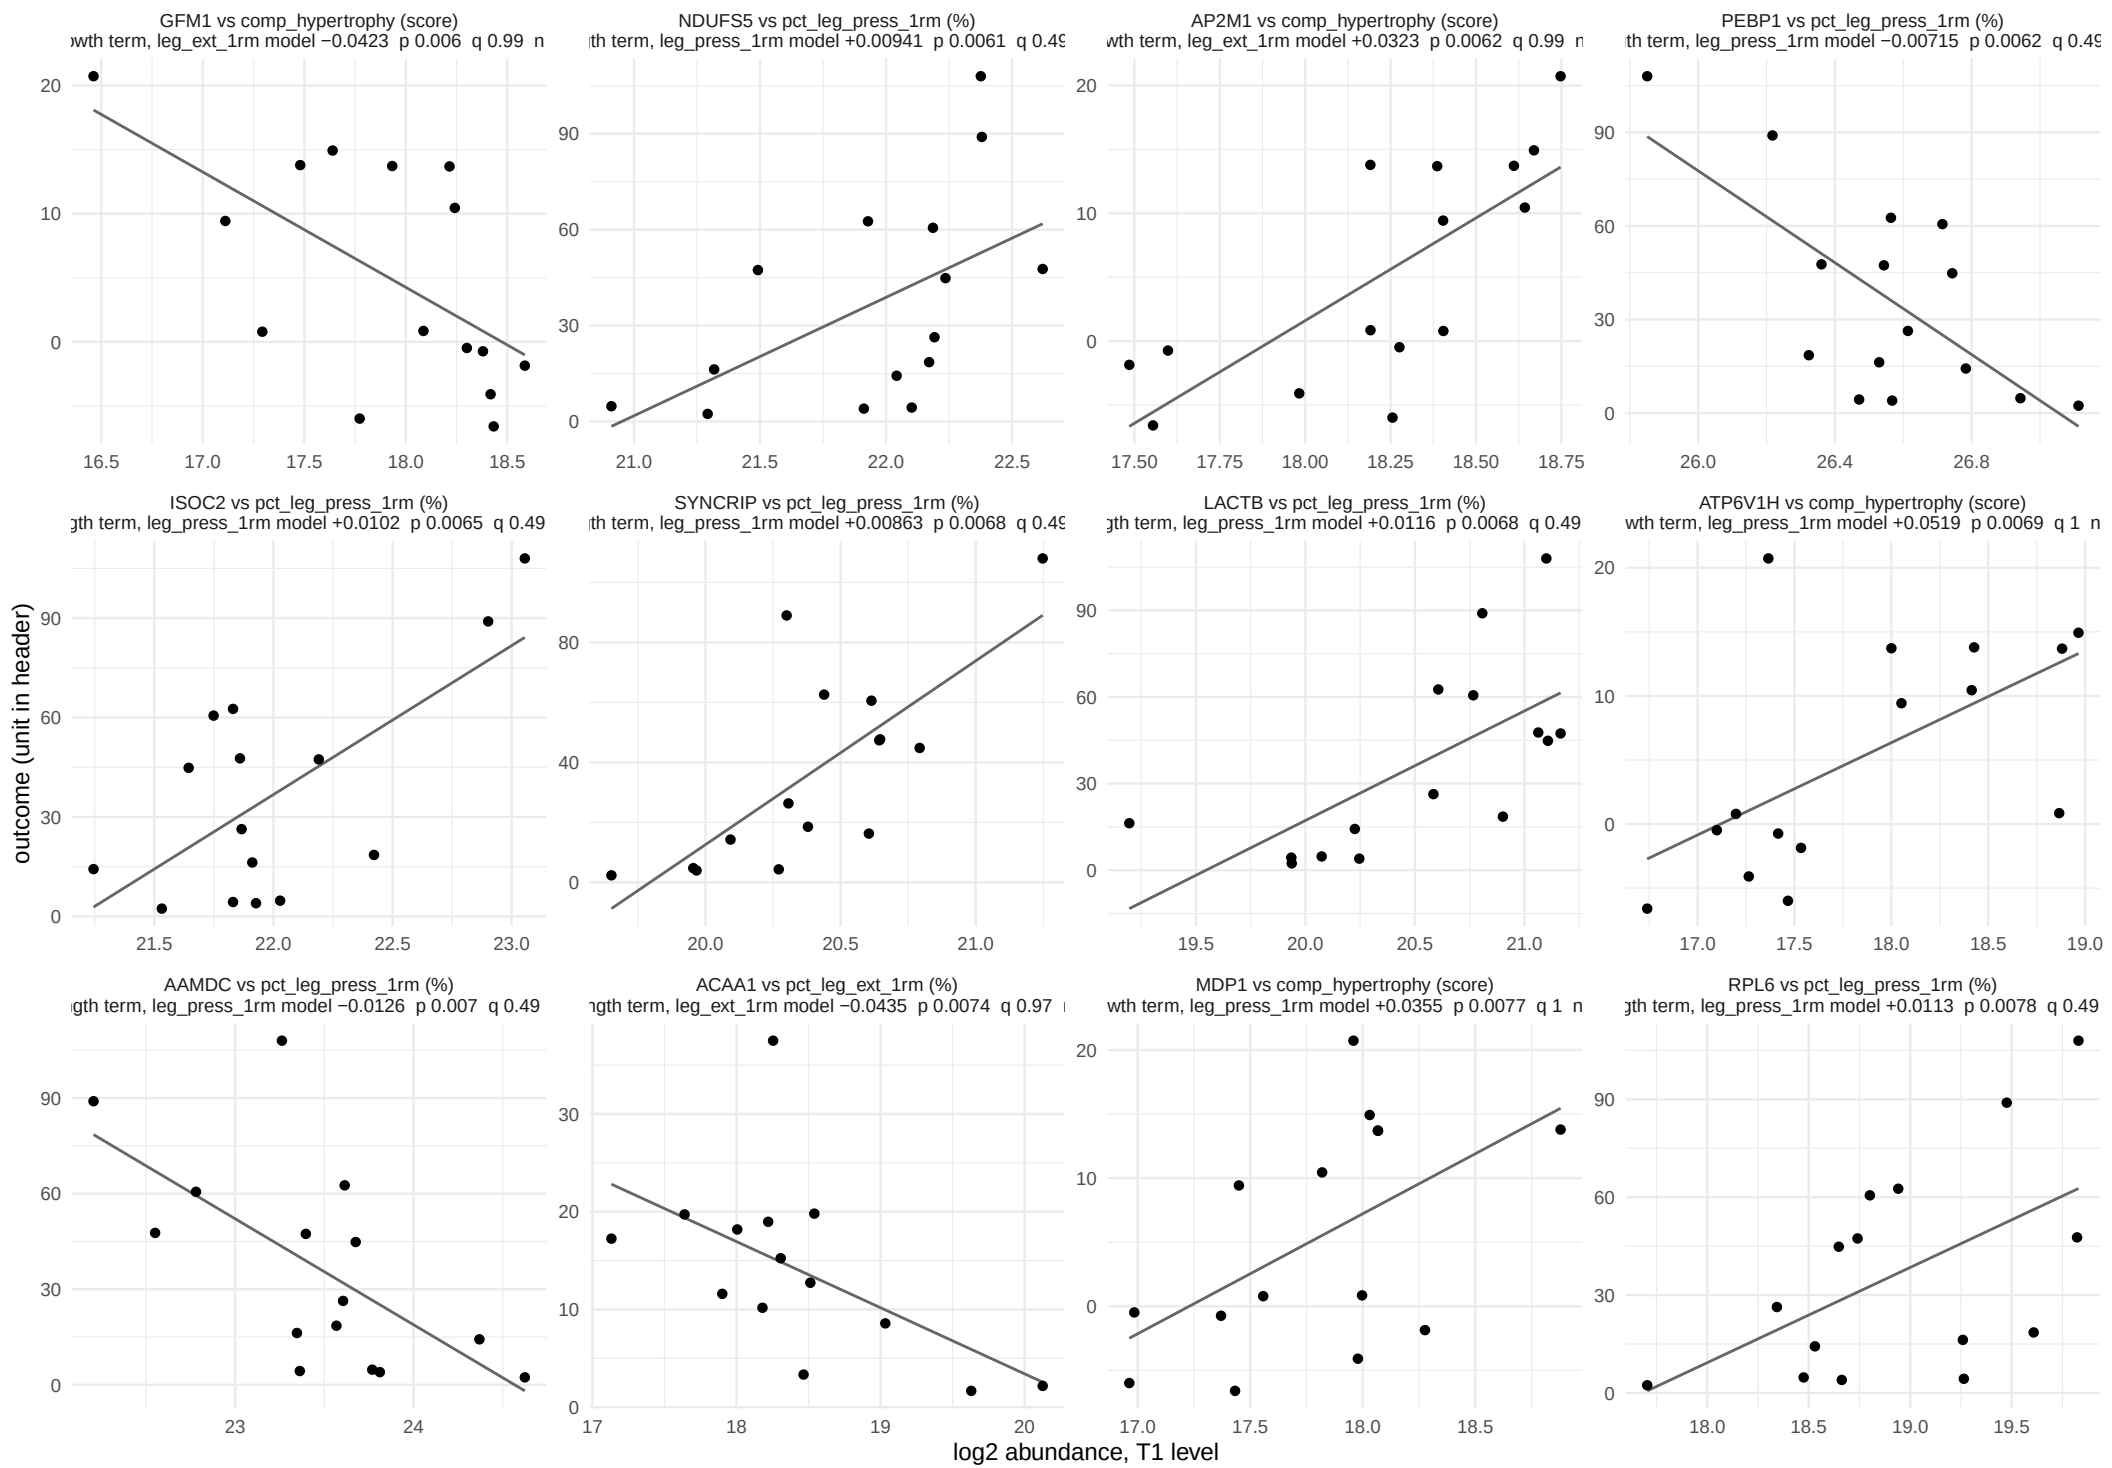

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/01_proteins.xlsx, two_predictor.

Two predictor, baseline window


391 of 7600 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 6 of 33.

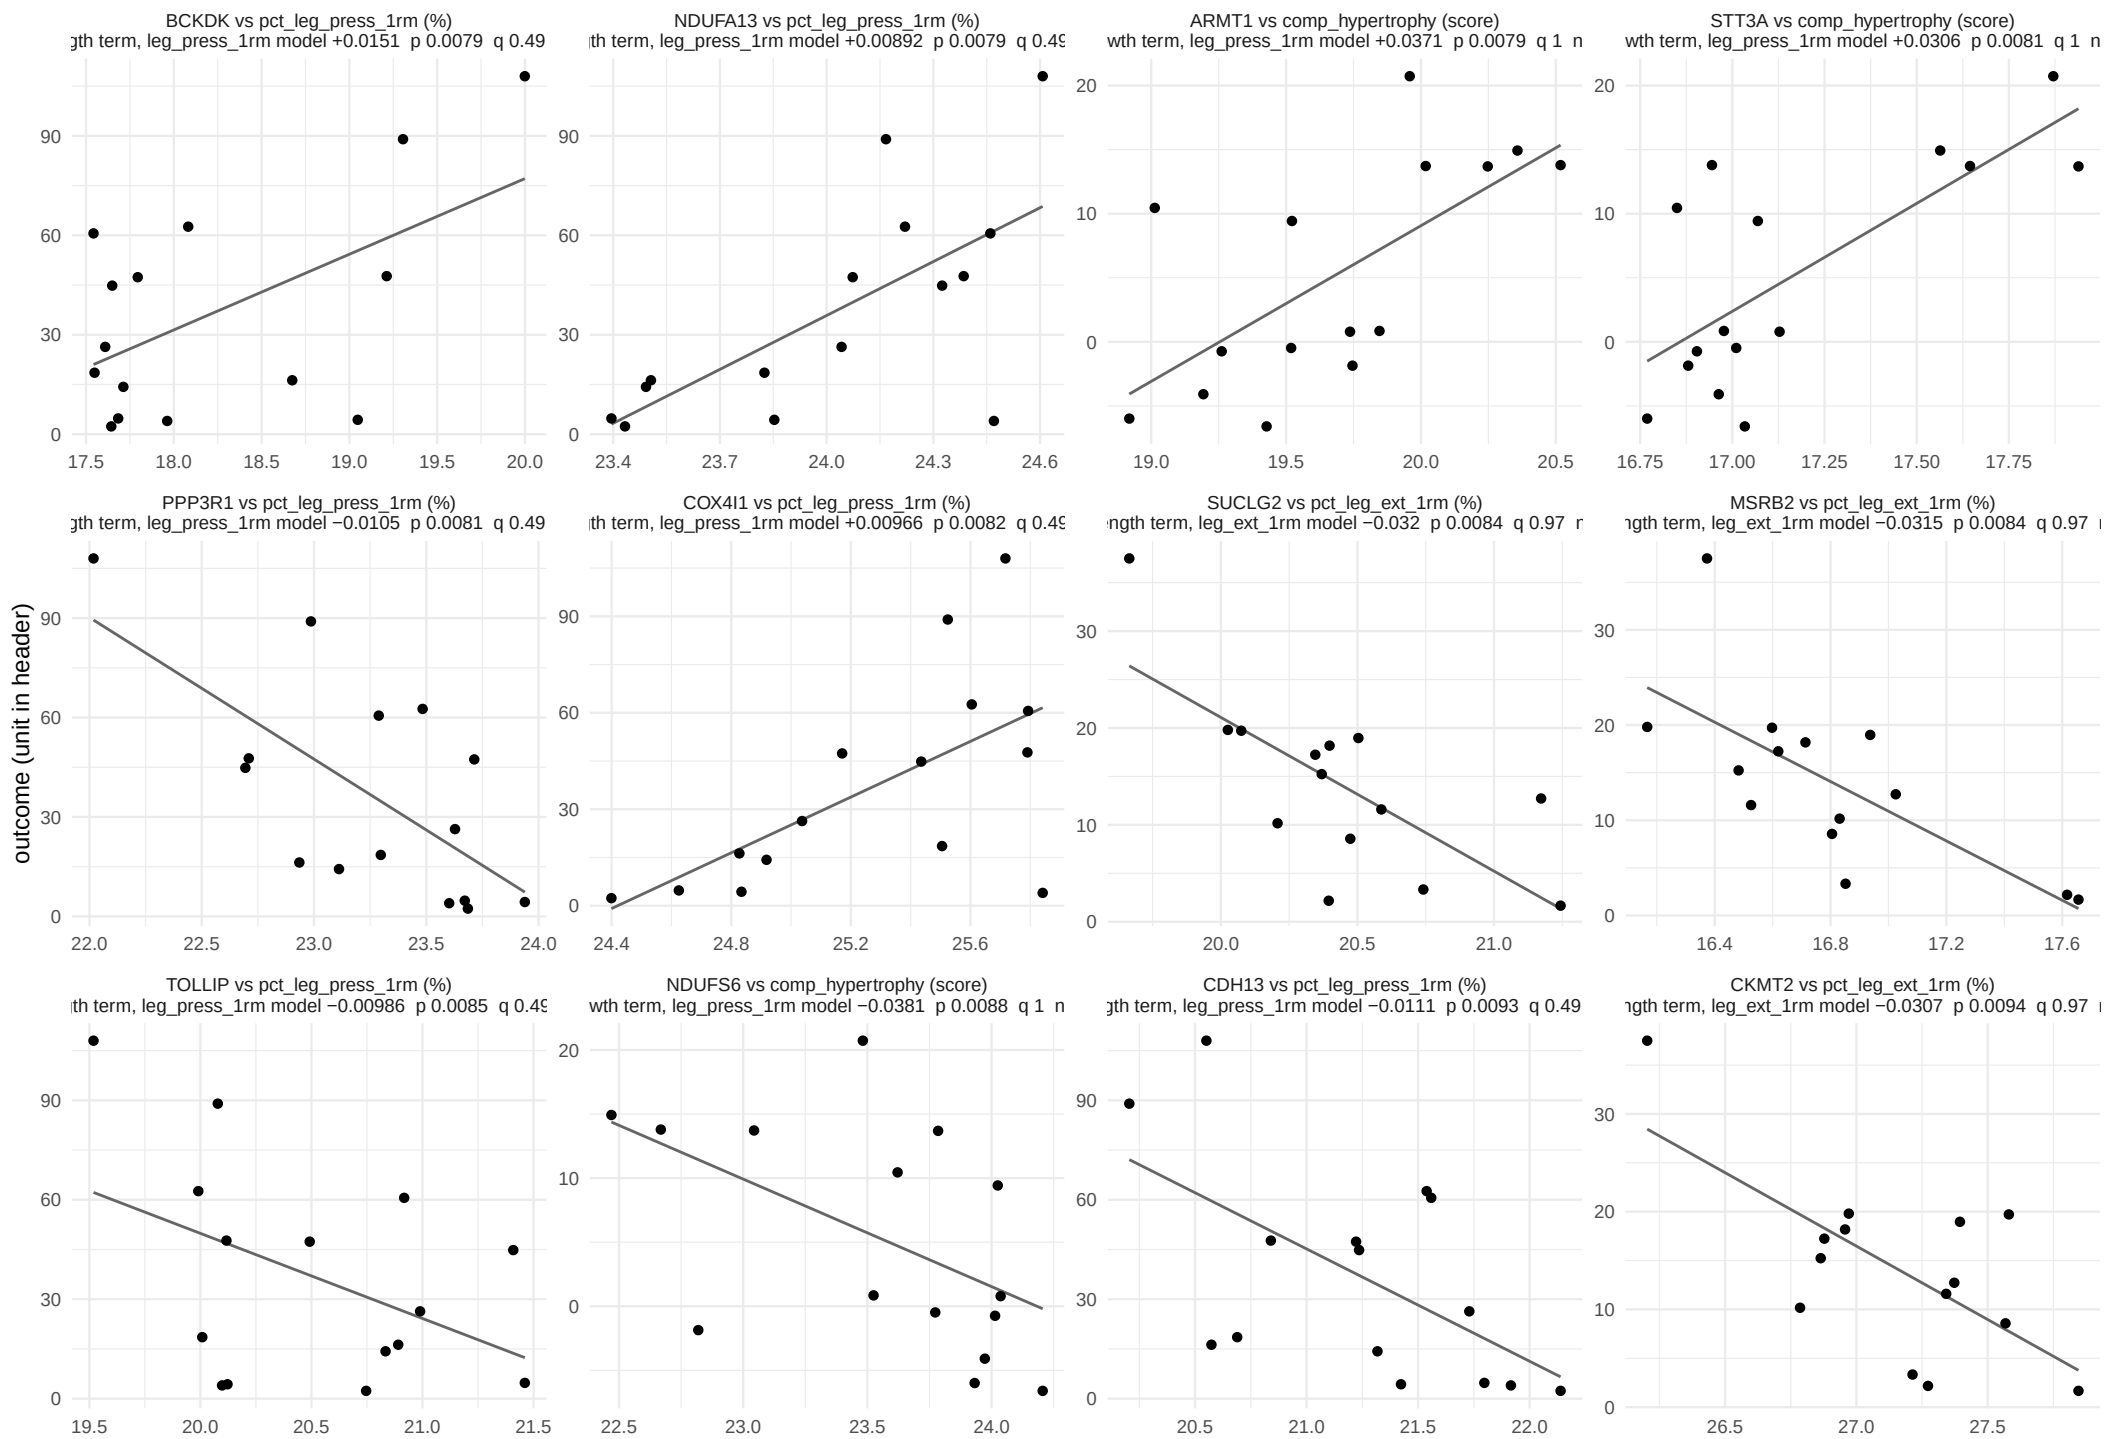

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/01_proteins.xlsx, two_predictor.

Two predictor, baseline window


391 of 7600 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 7 of 33.

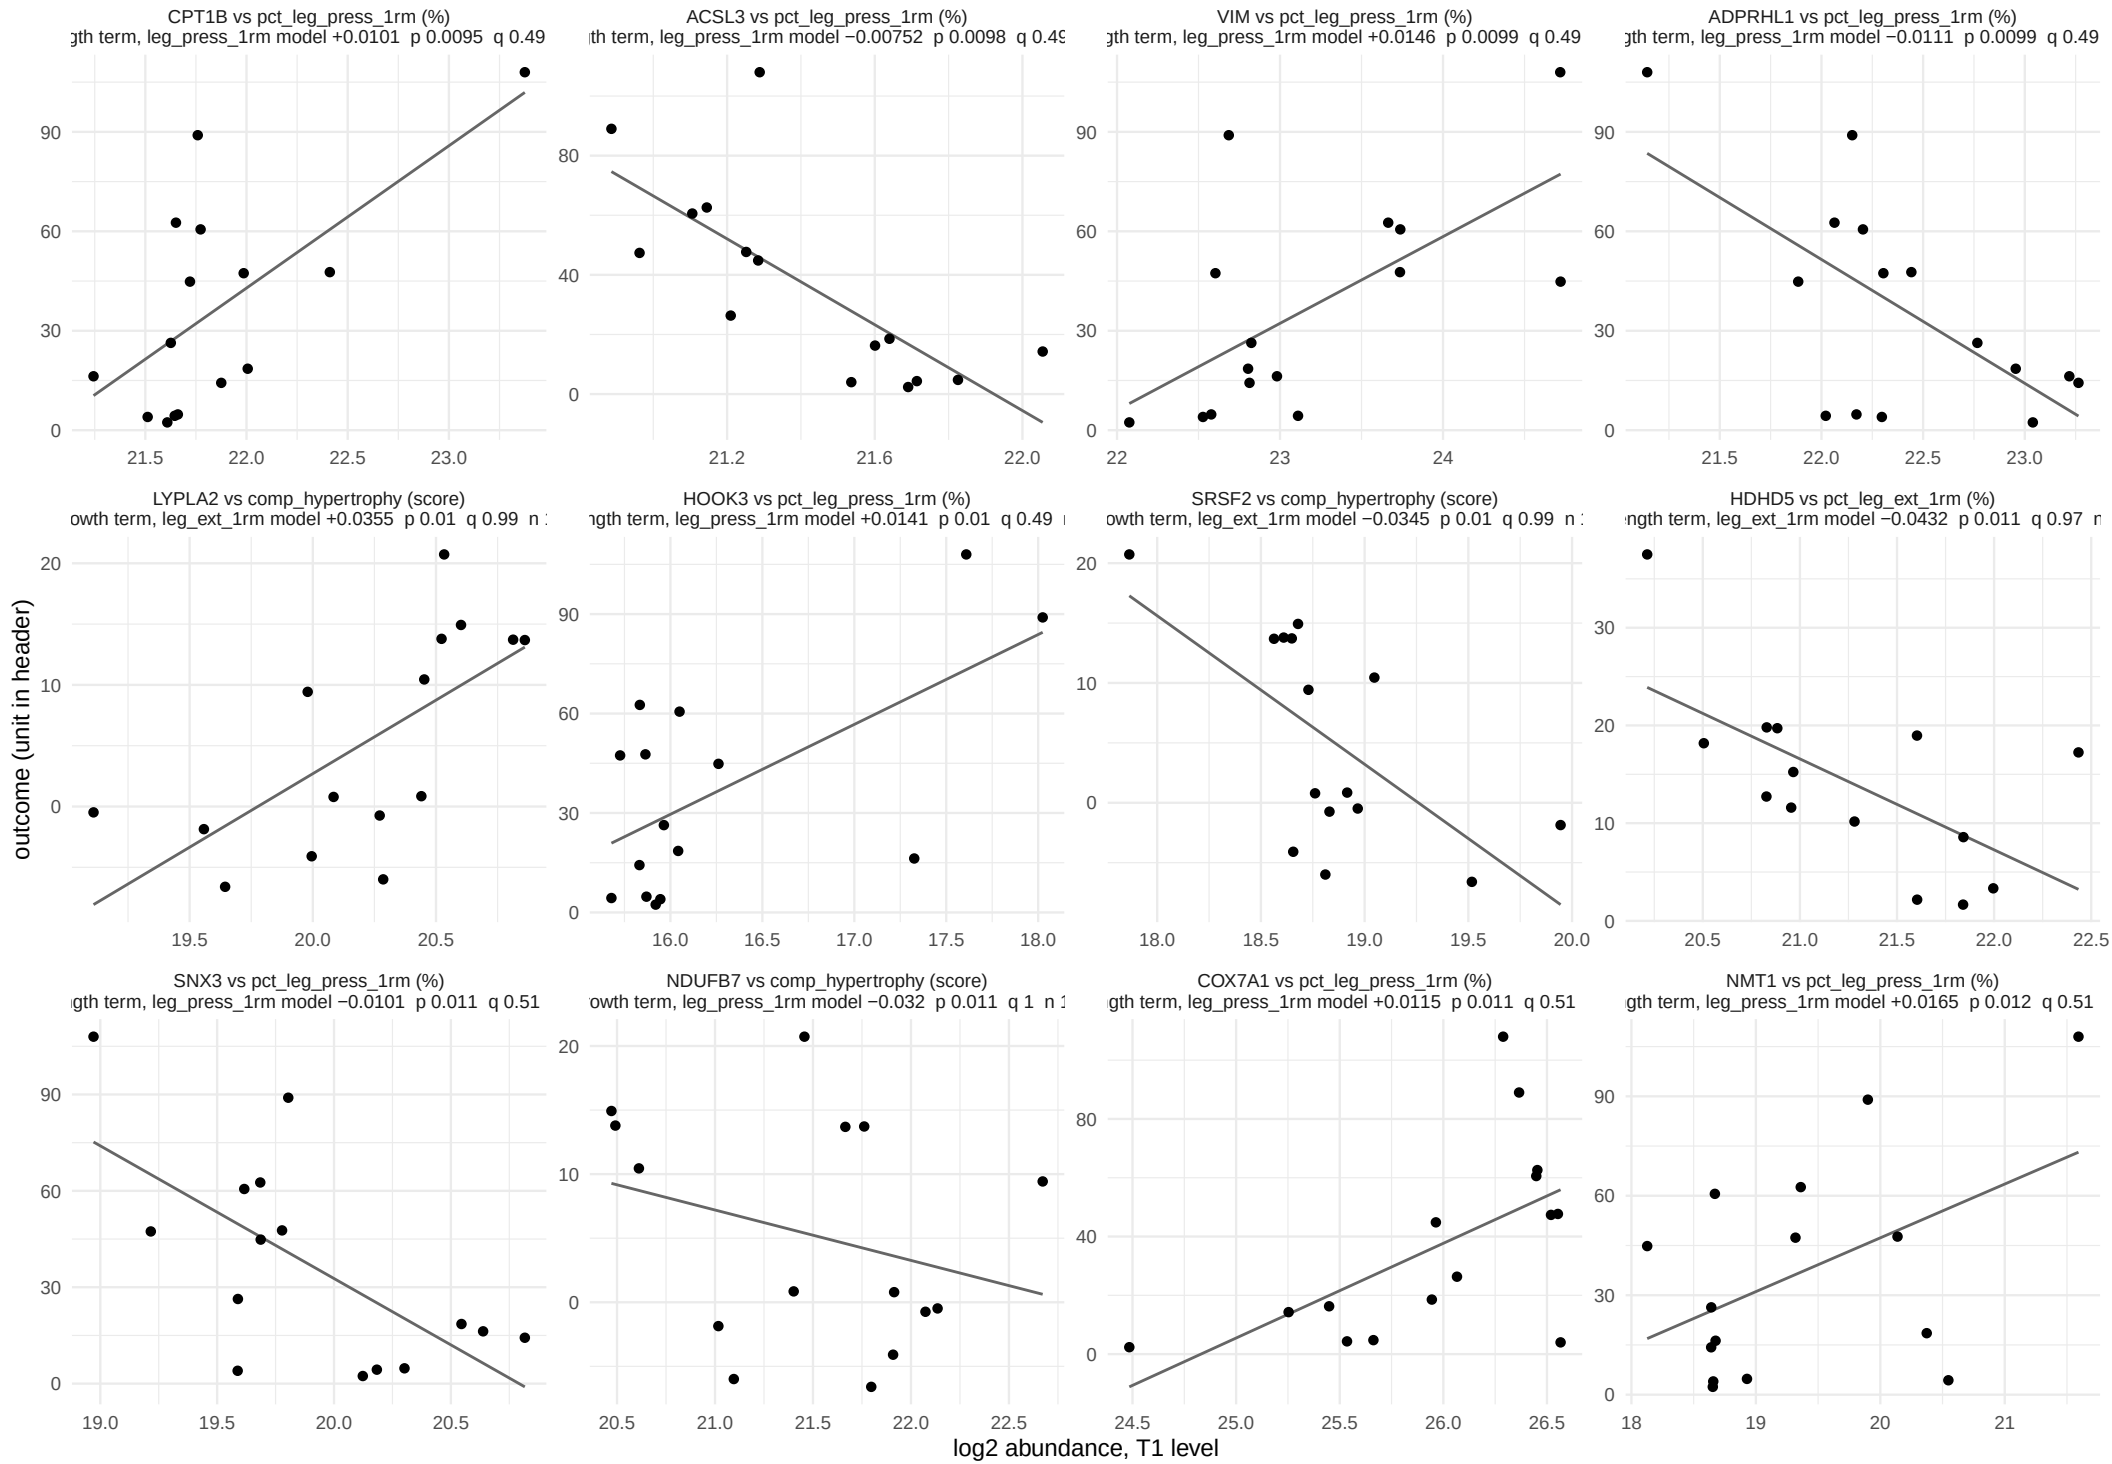

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/01_proteins.xlsx, two_predictor.

Two predictor, baseline window


391 of 7600 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 8 of 33.

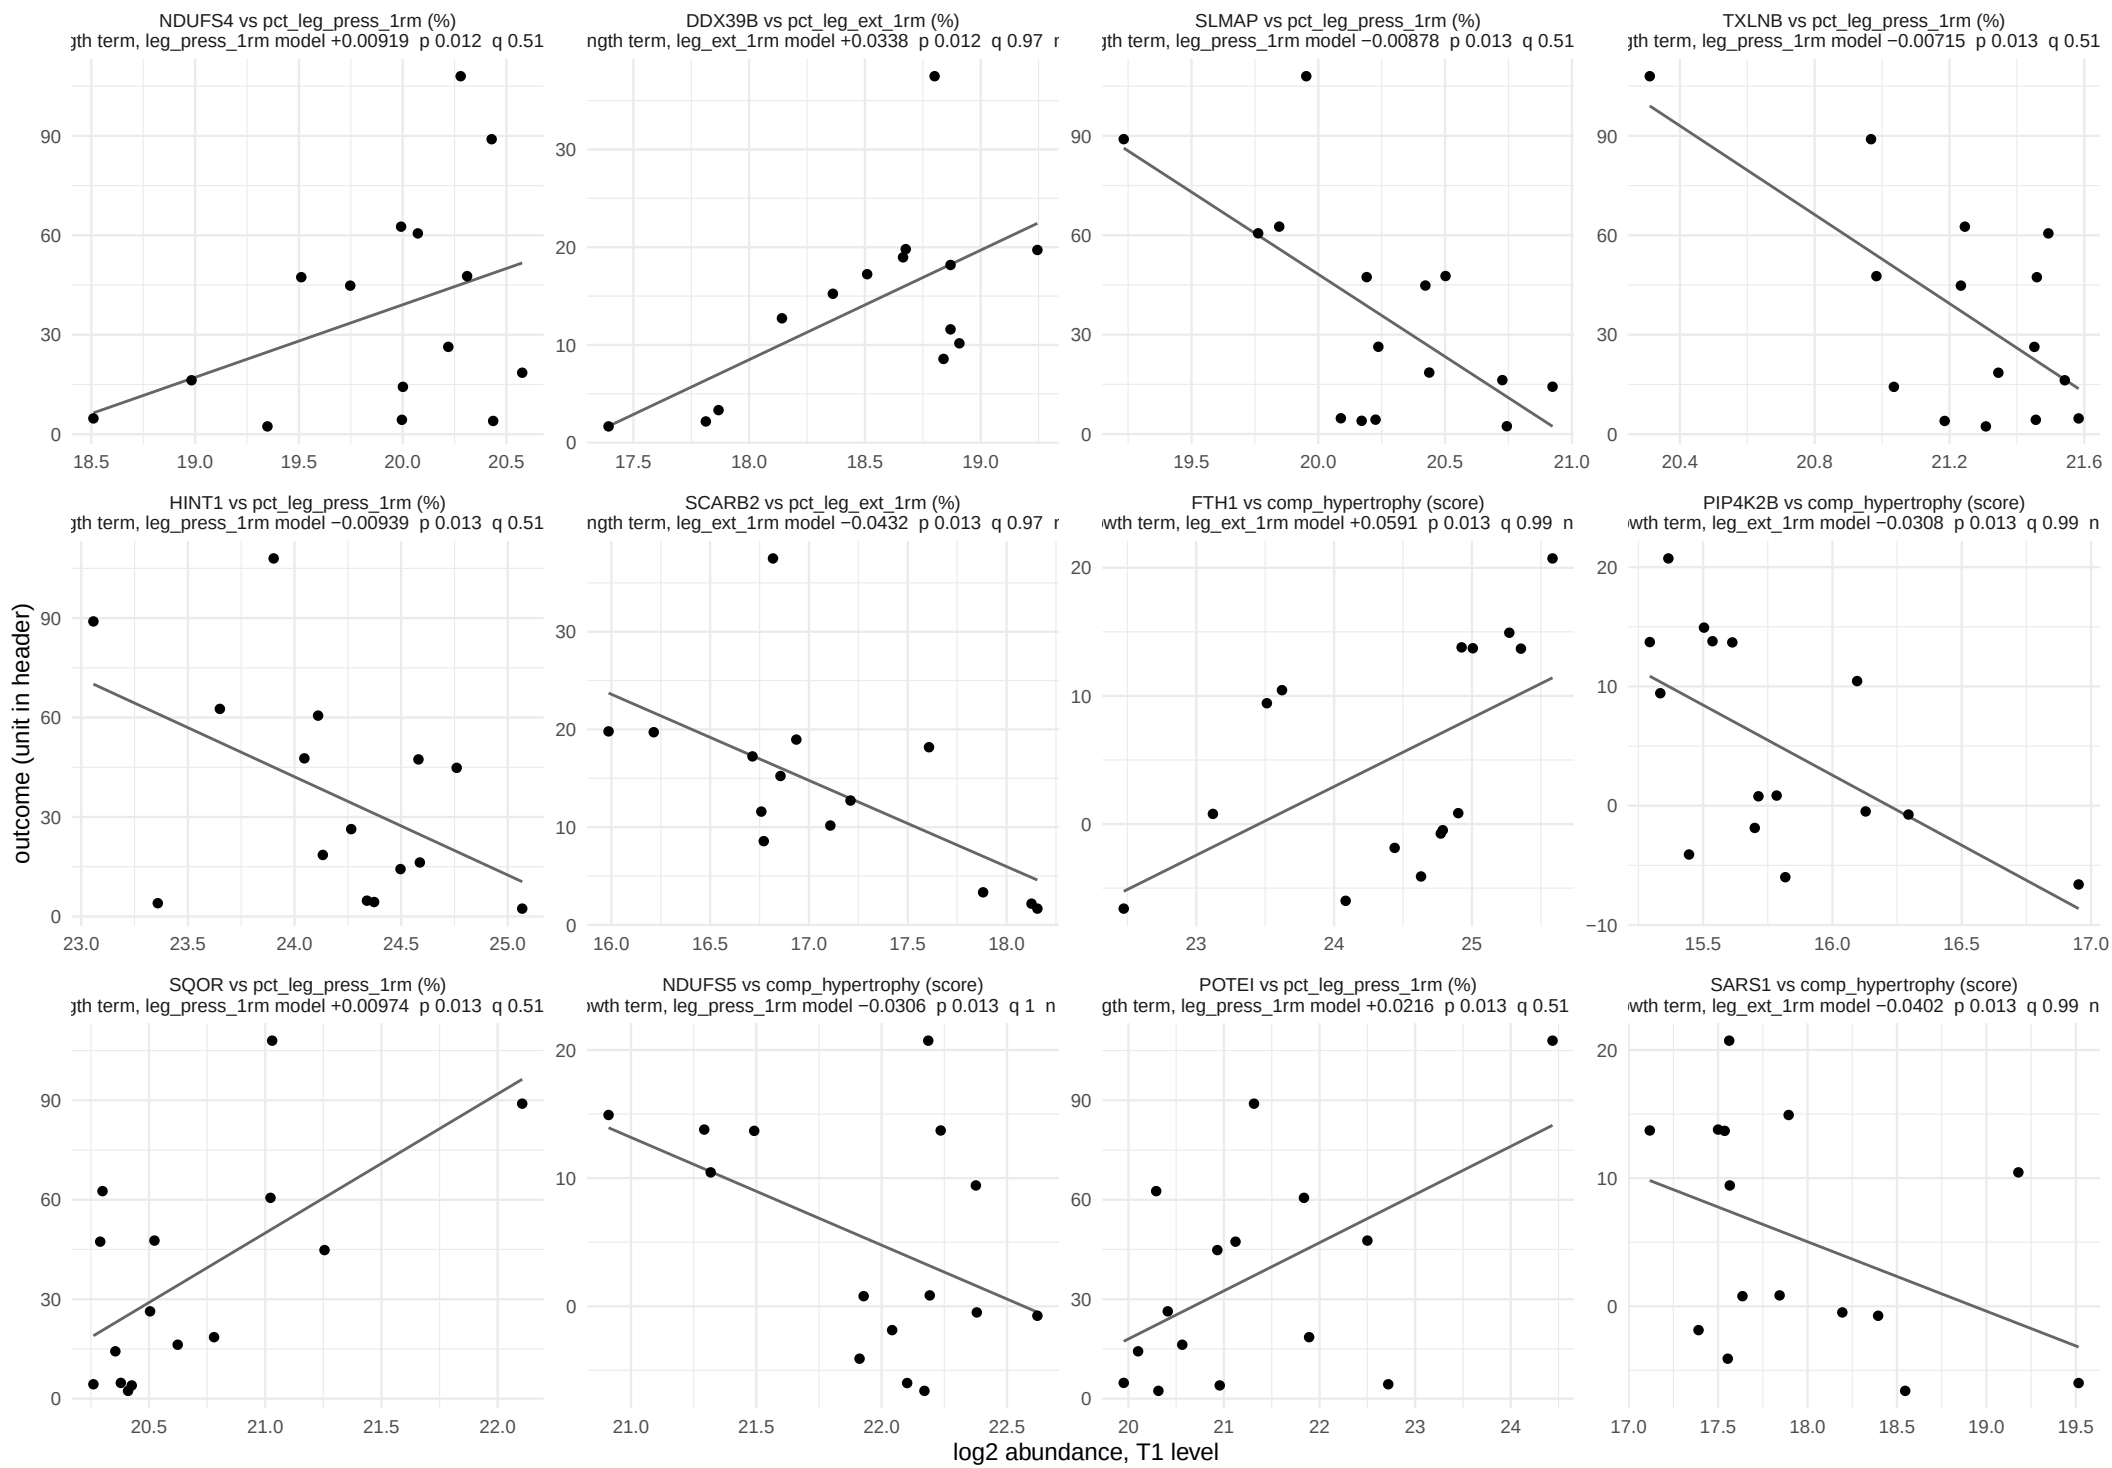

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/01_proteins.xlsx, two_predictor.

Two predictor, baseline window


391 of 7600 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 9 of 33.

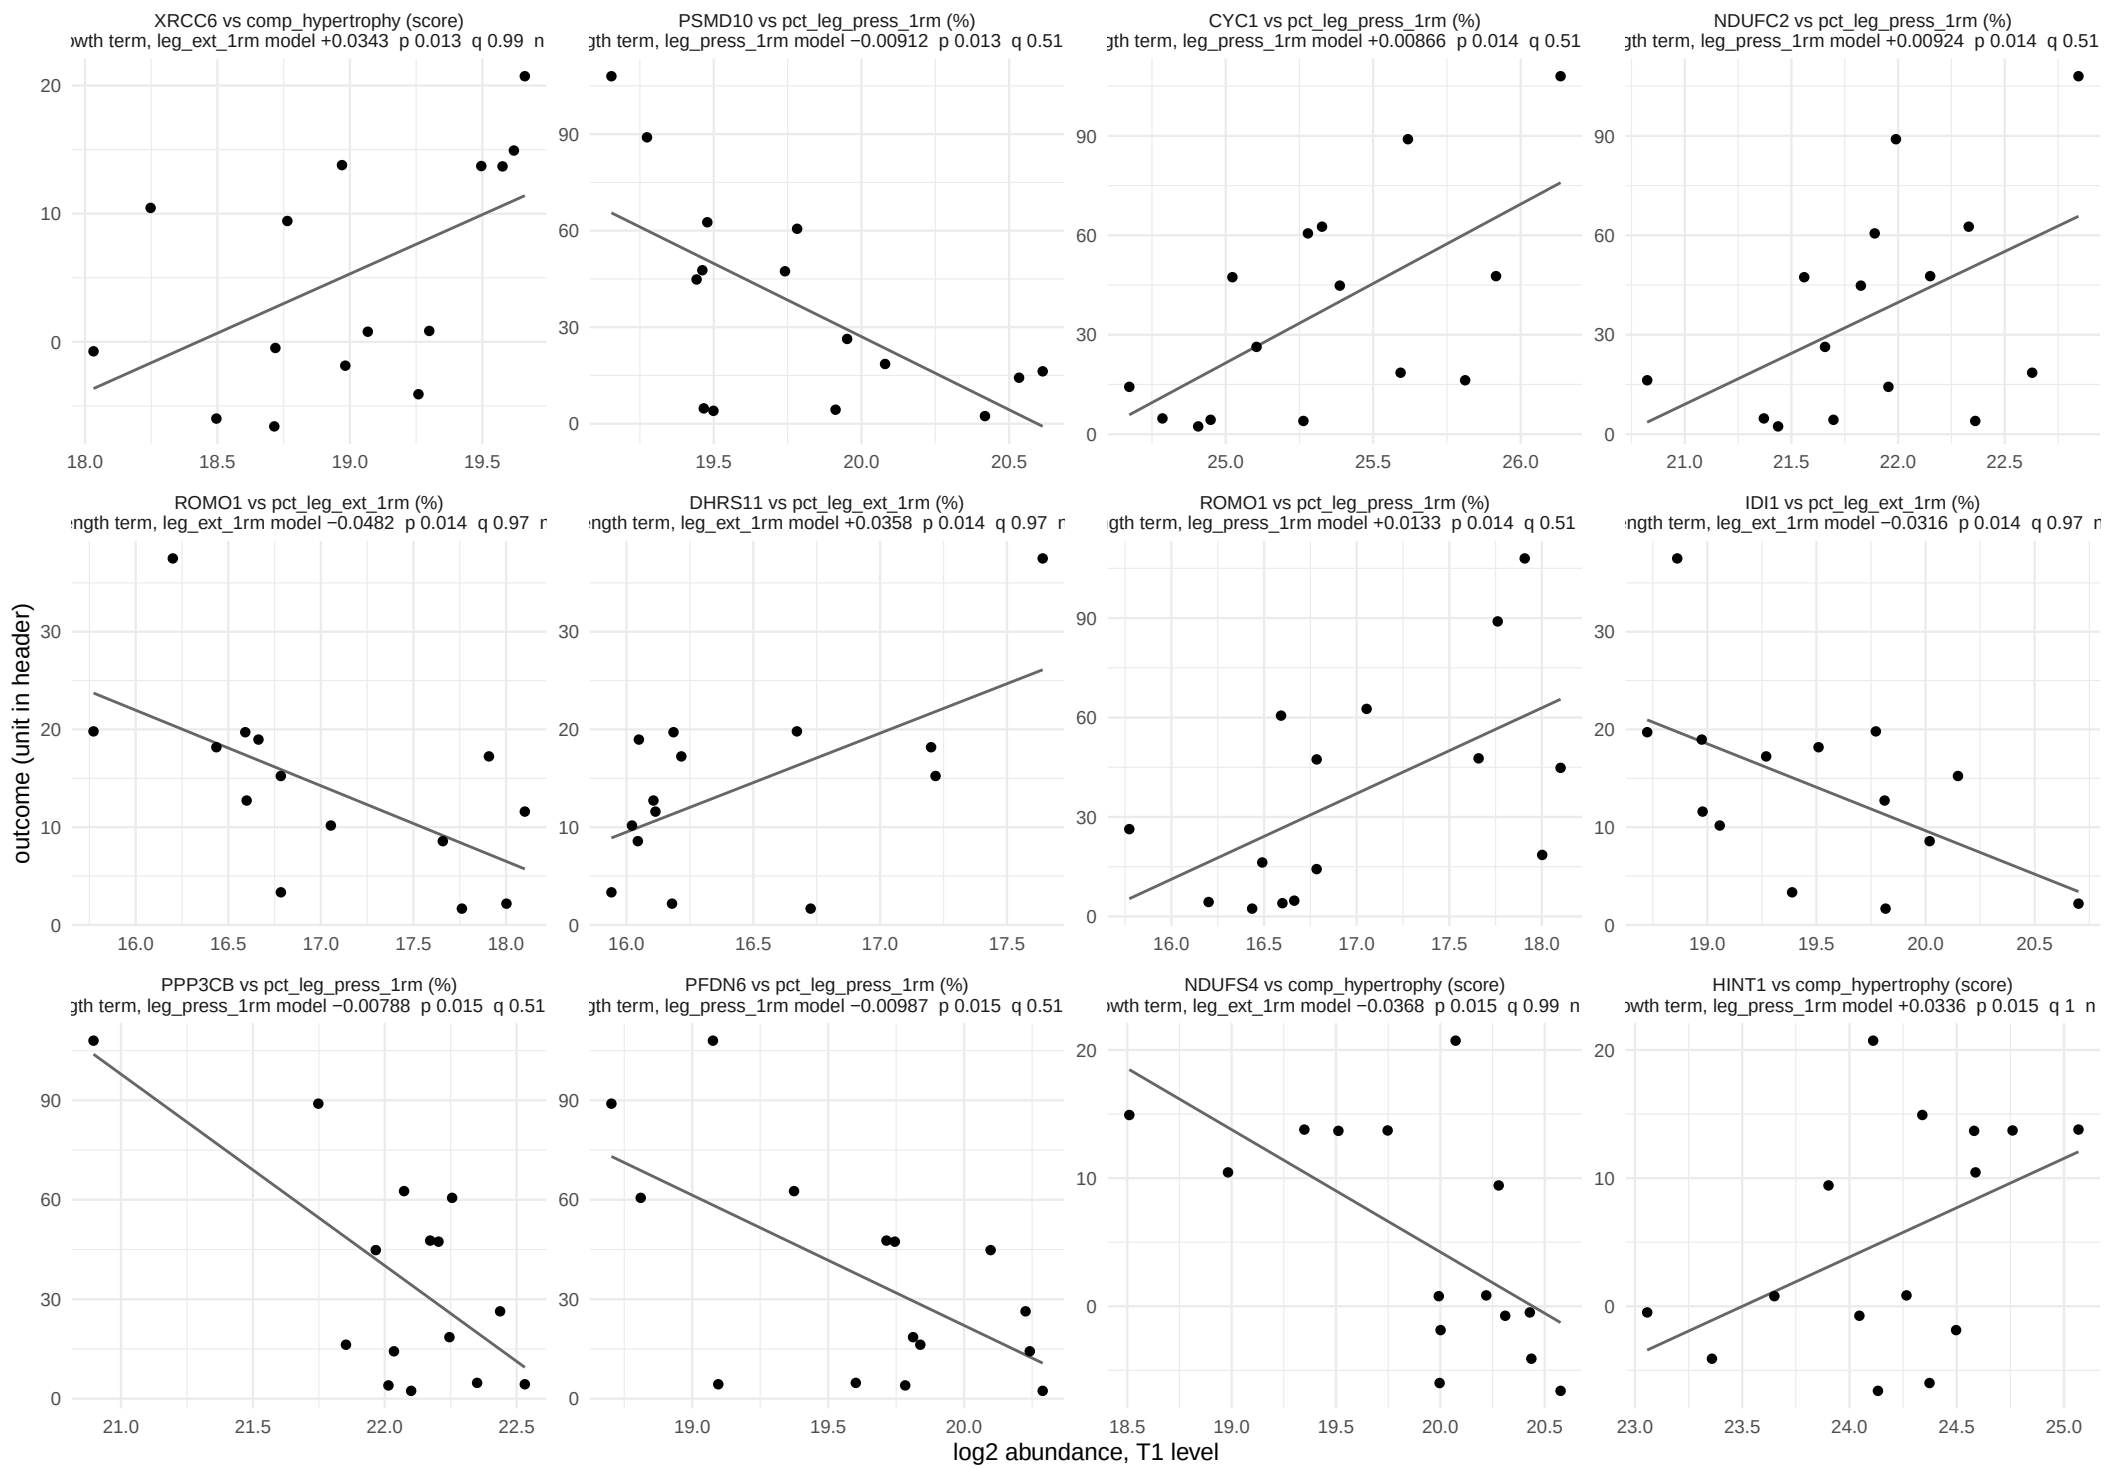

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/01_proteins.xlsx, two_predictor.

Two predictor, baseline window


391 of 7600 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 10 of 33.

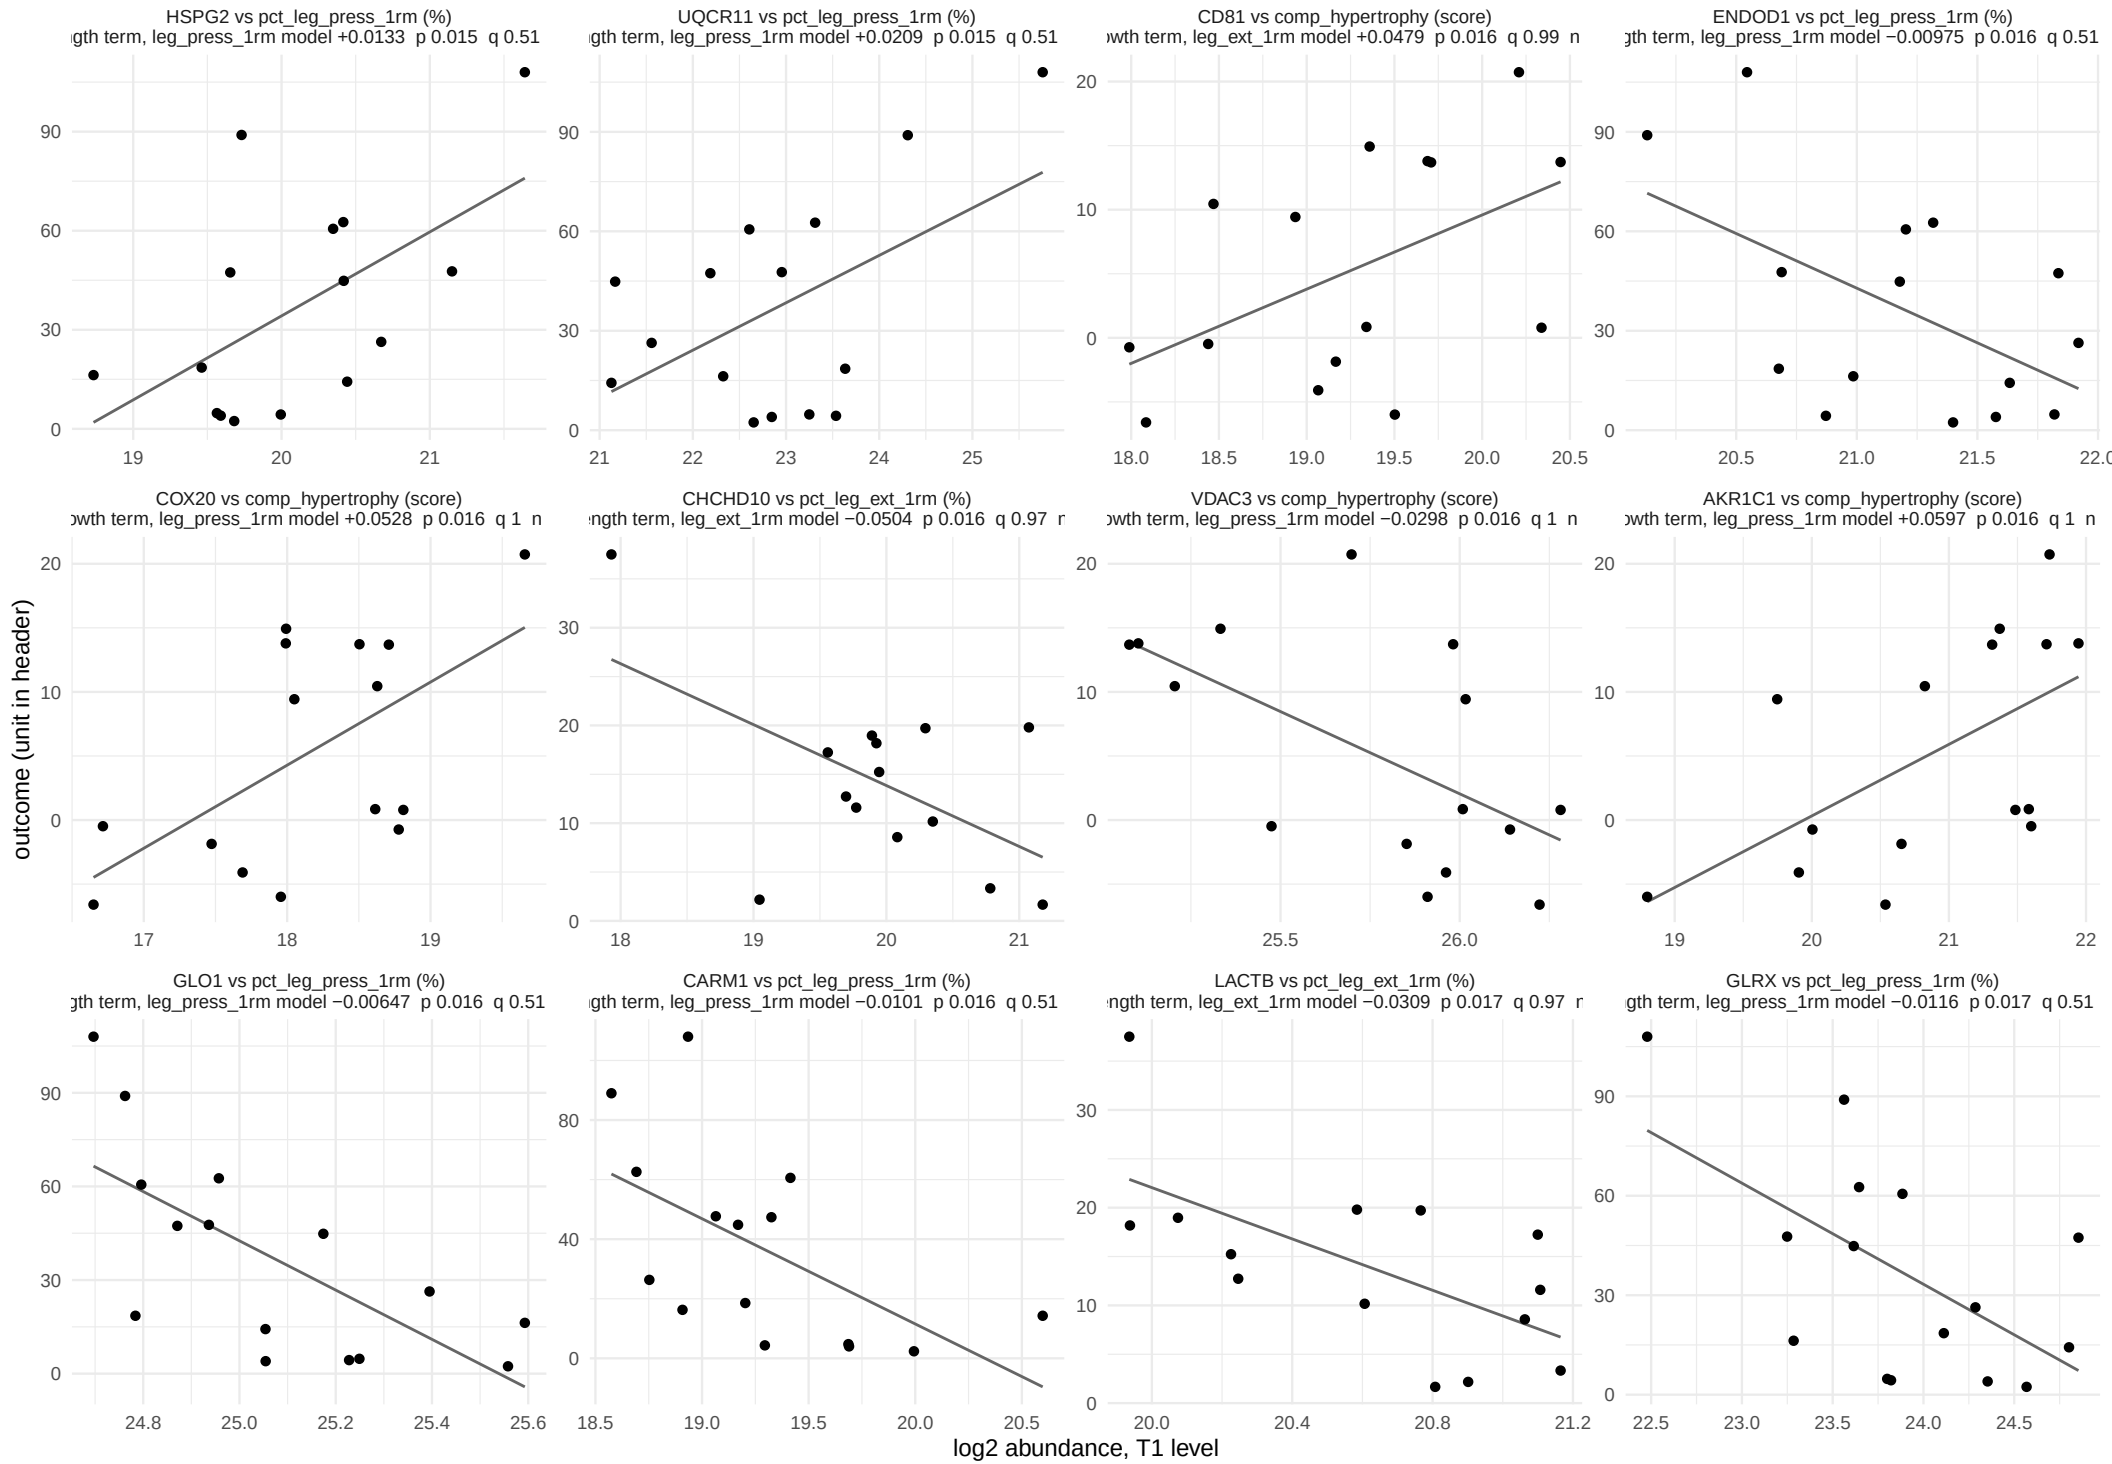

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/01_proteins.xlsx, two_predictor.

Two predictor, baseline window


391 of 7600 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 11 of 33.

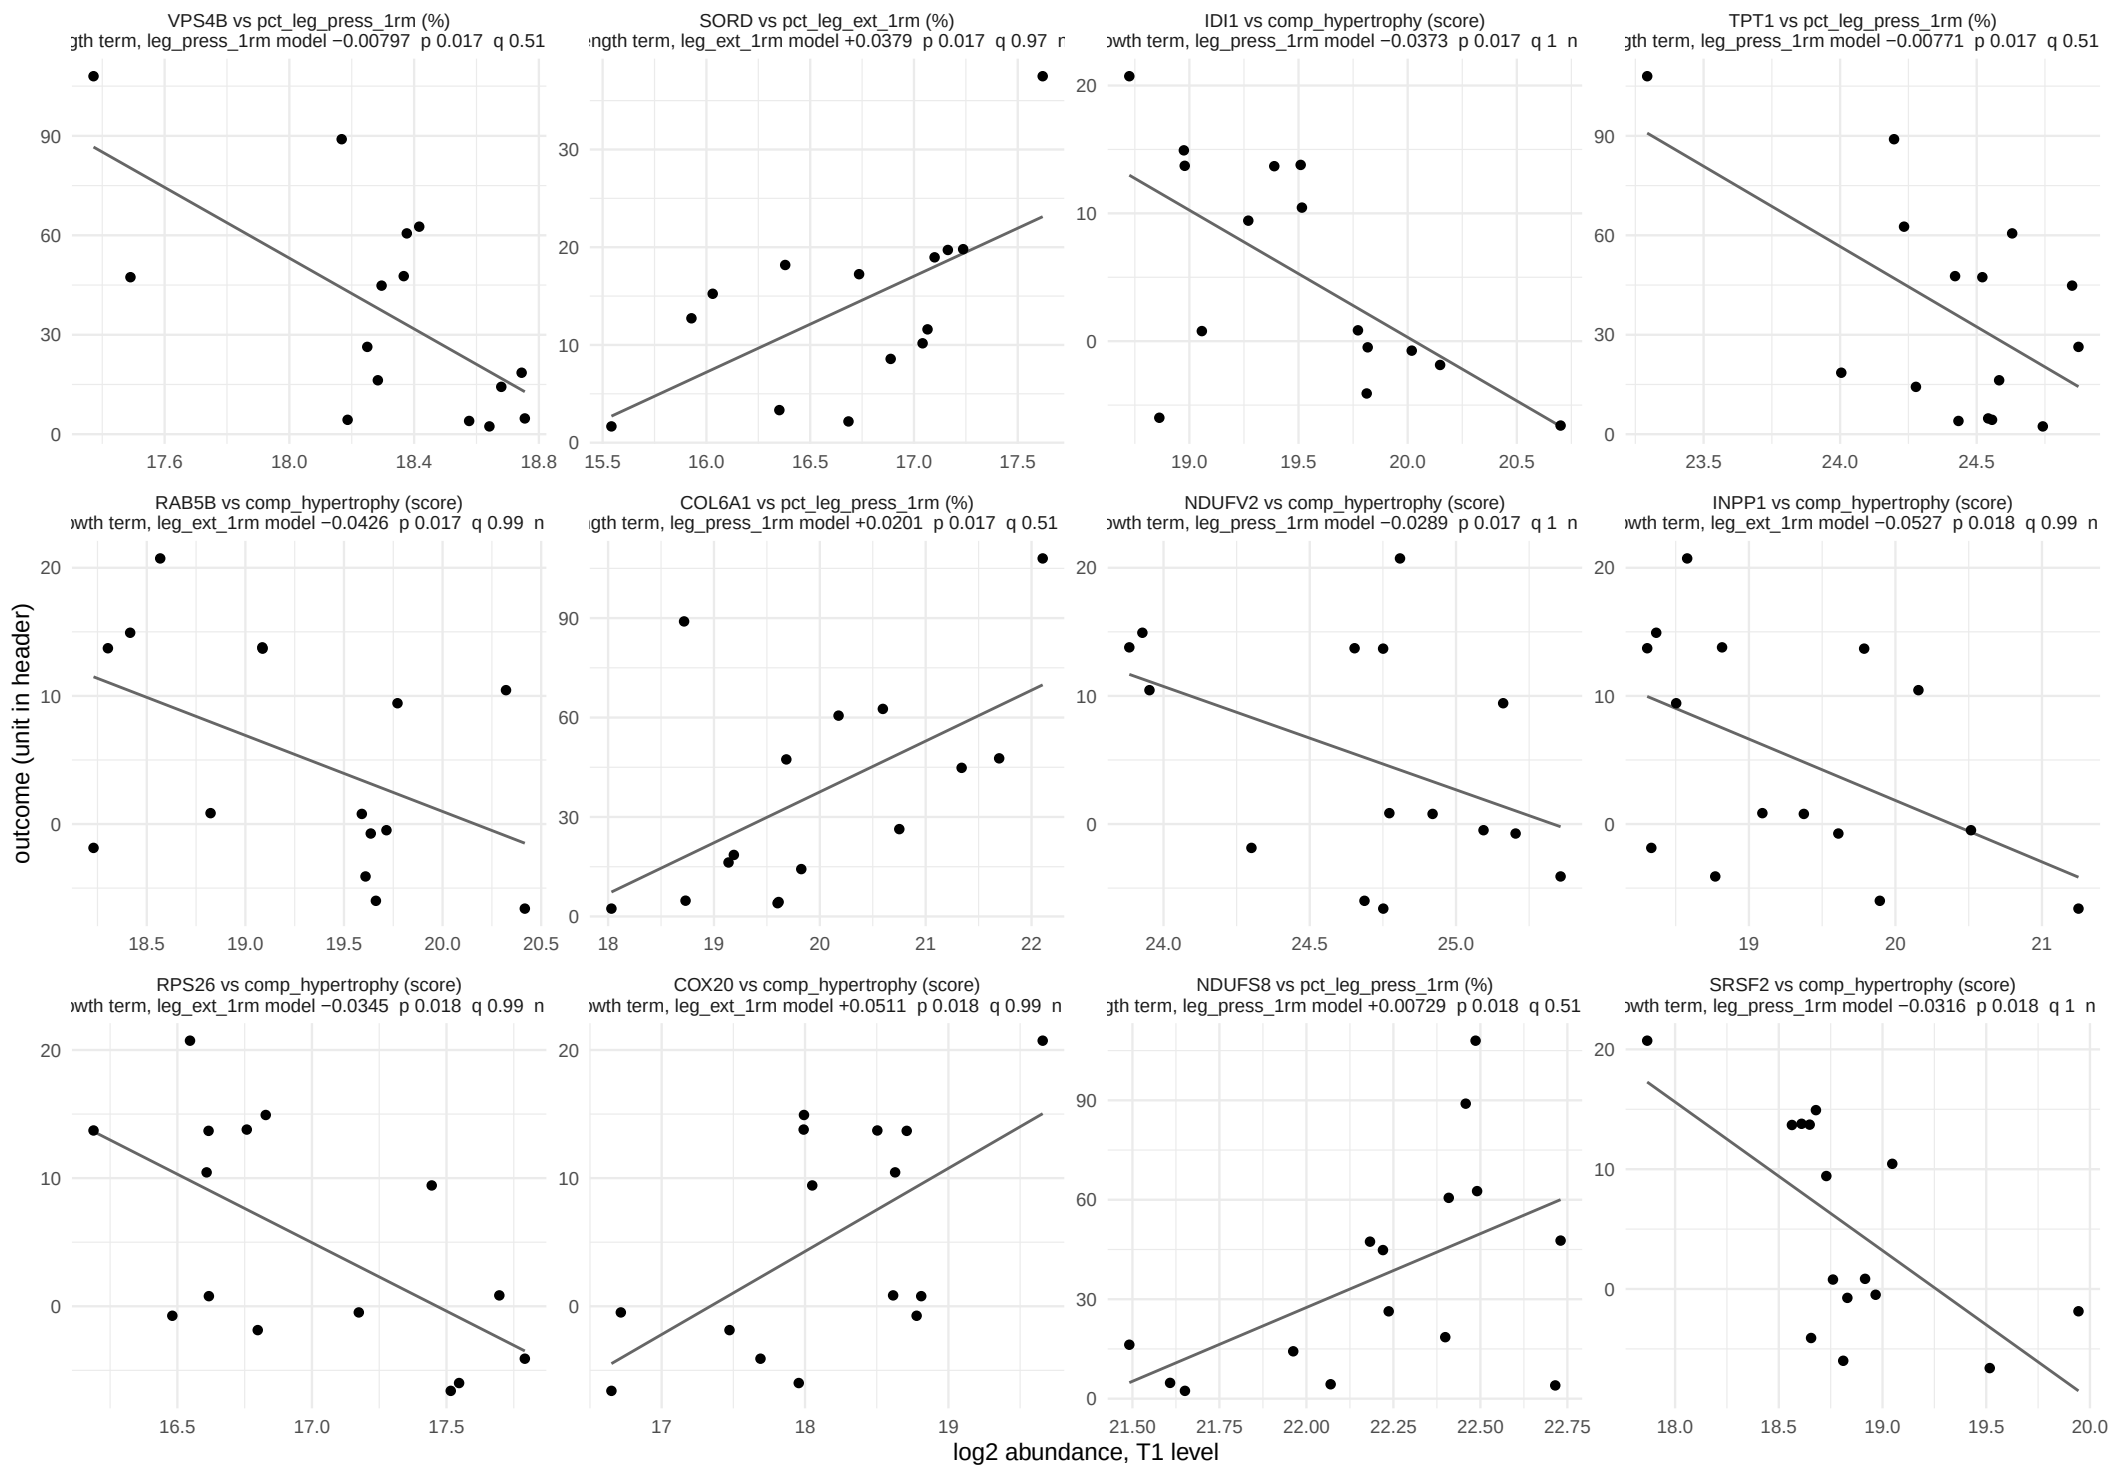

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/01_proteins.xlsx, two_predictor.

Two predictor, baseline window


391 of 7600 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 12 of 33.

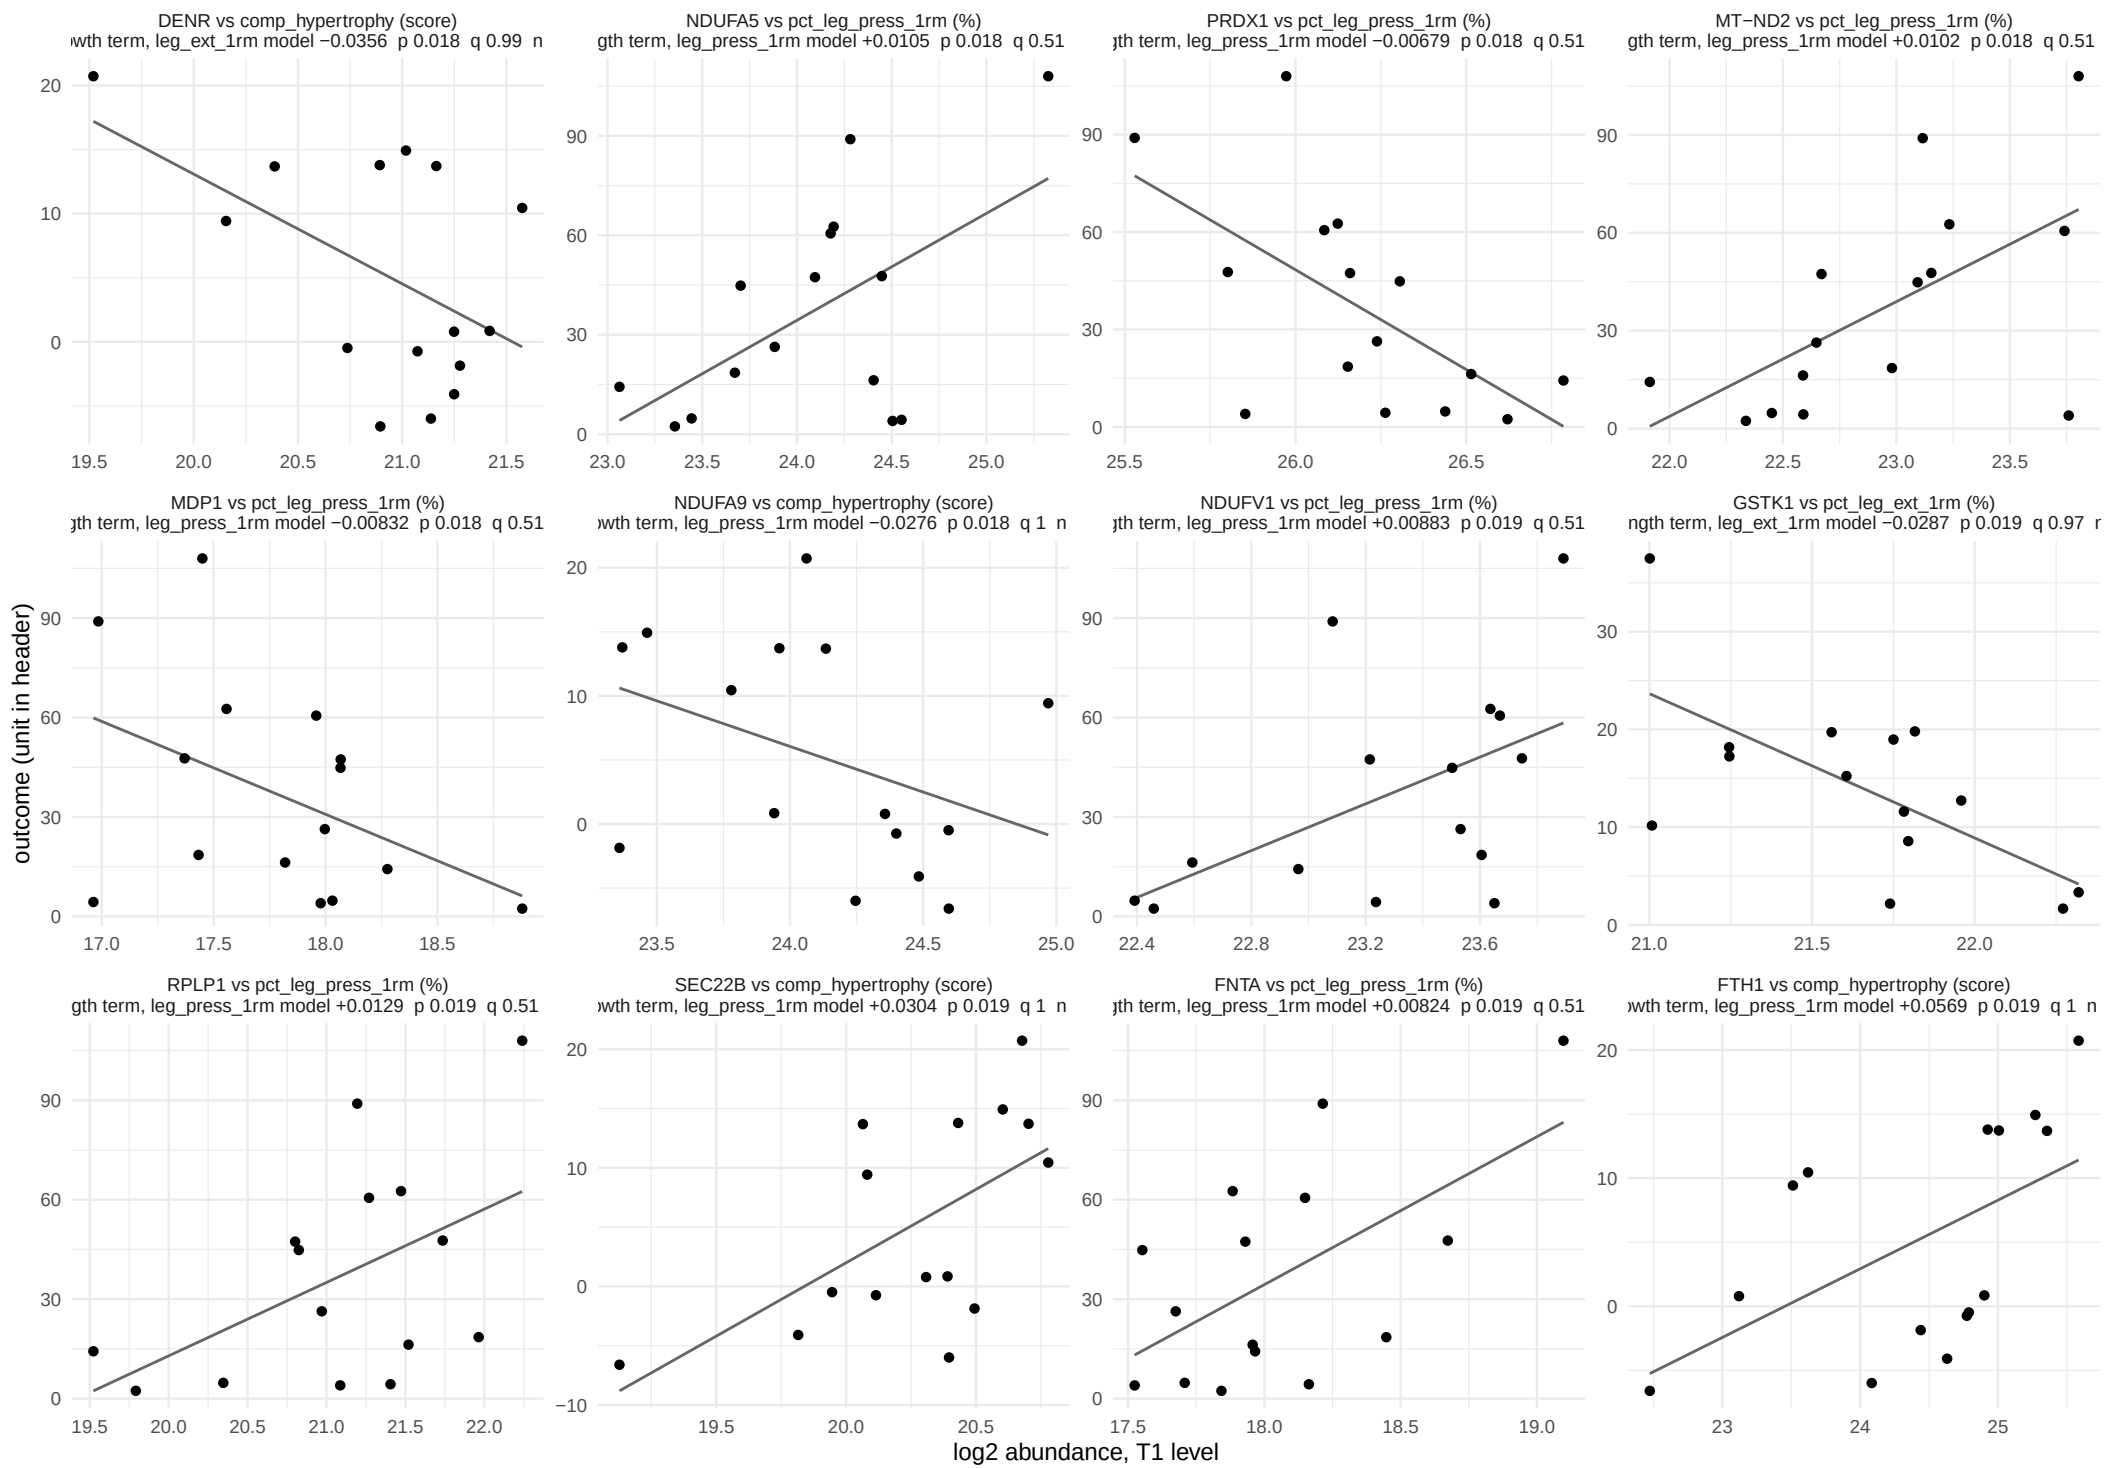

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/01_proteins.xlsx, two_predictor.

Two predictor, baseline window


391 of 7600 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 13 of 33.

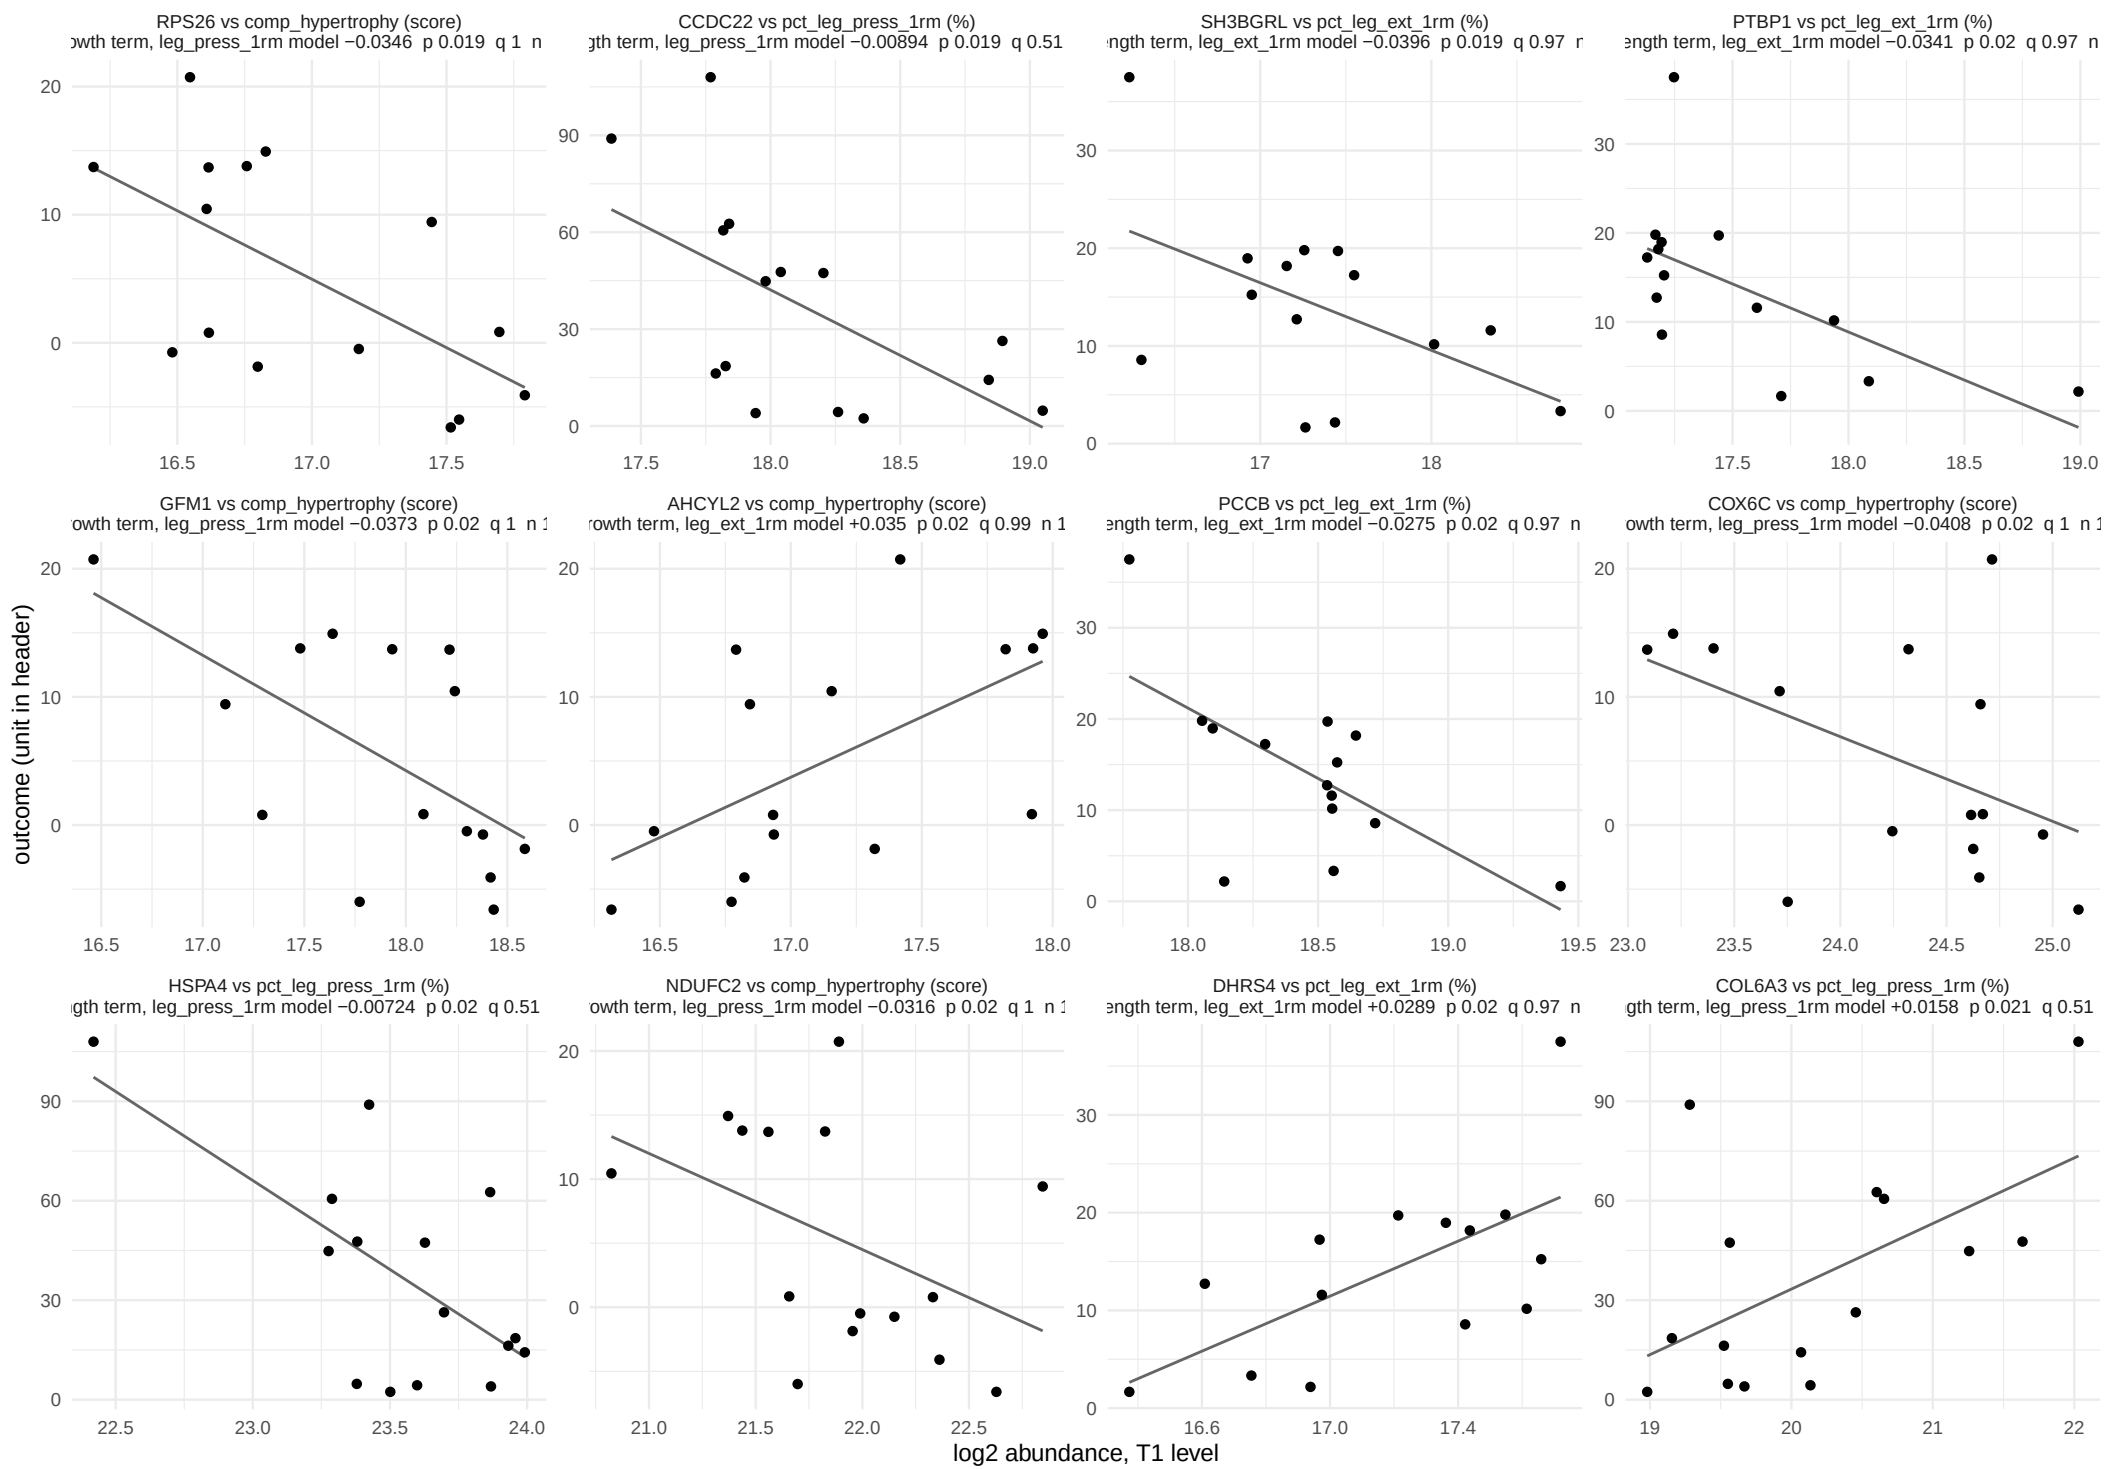

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/01_proteins.xlsx, two_predictor.

Two predictor, baseline window


391 of 7600 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 14 of 33.

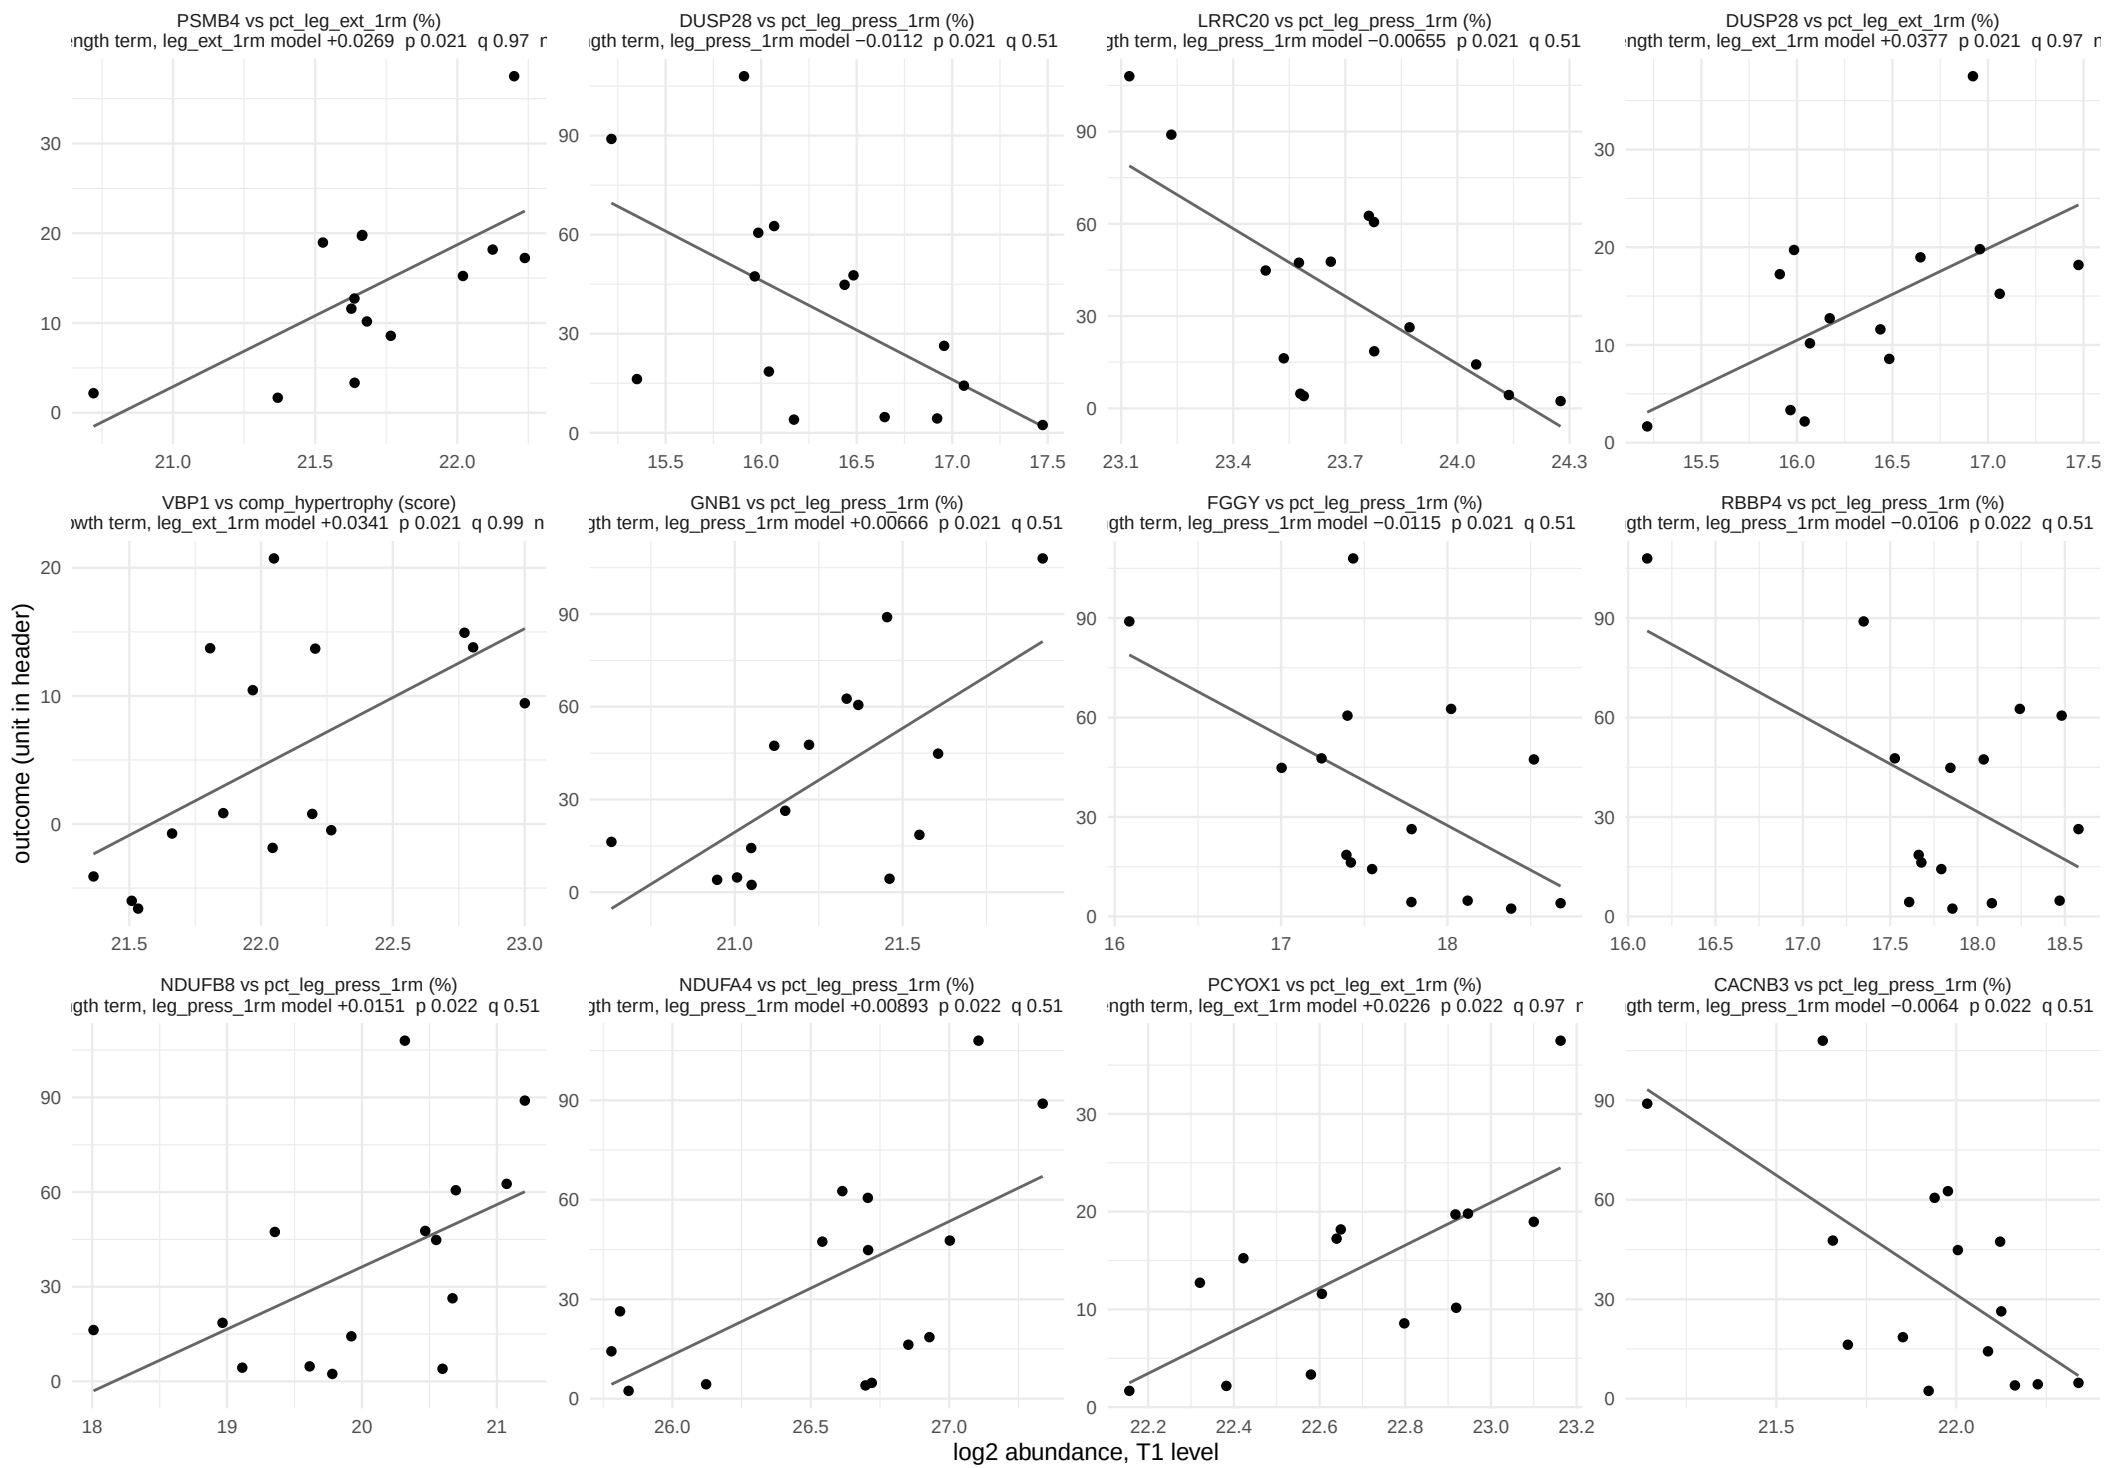

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/01_proteins.xlsx, two_predictor.

Two predictor, baseline window


391 of 7600 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 15 of 33.

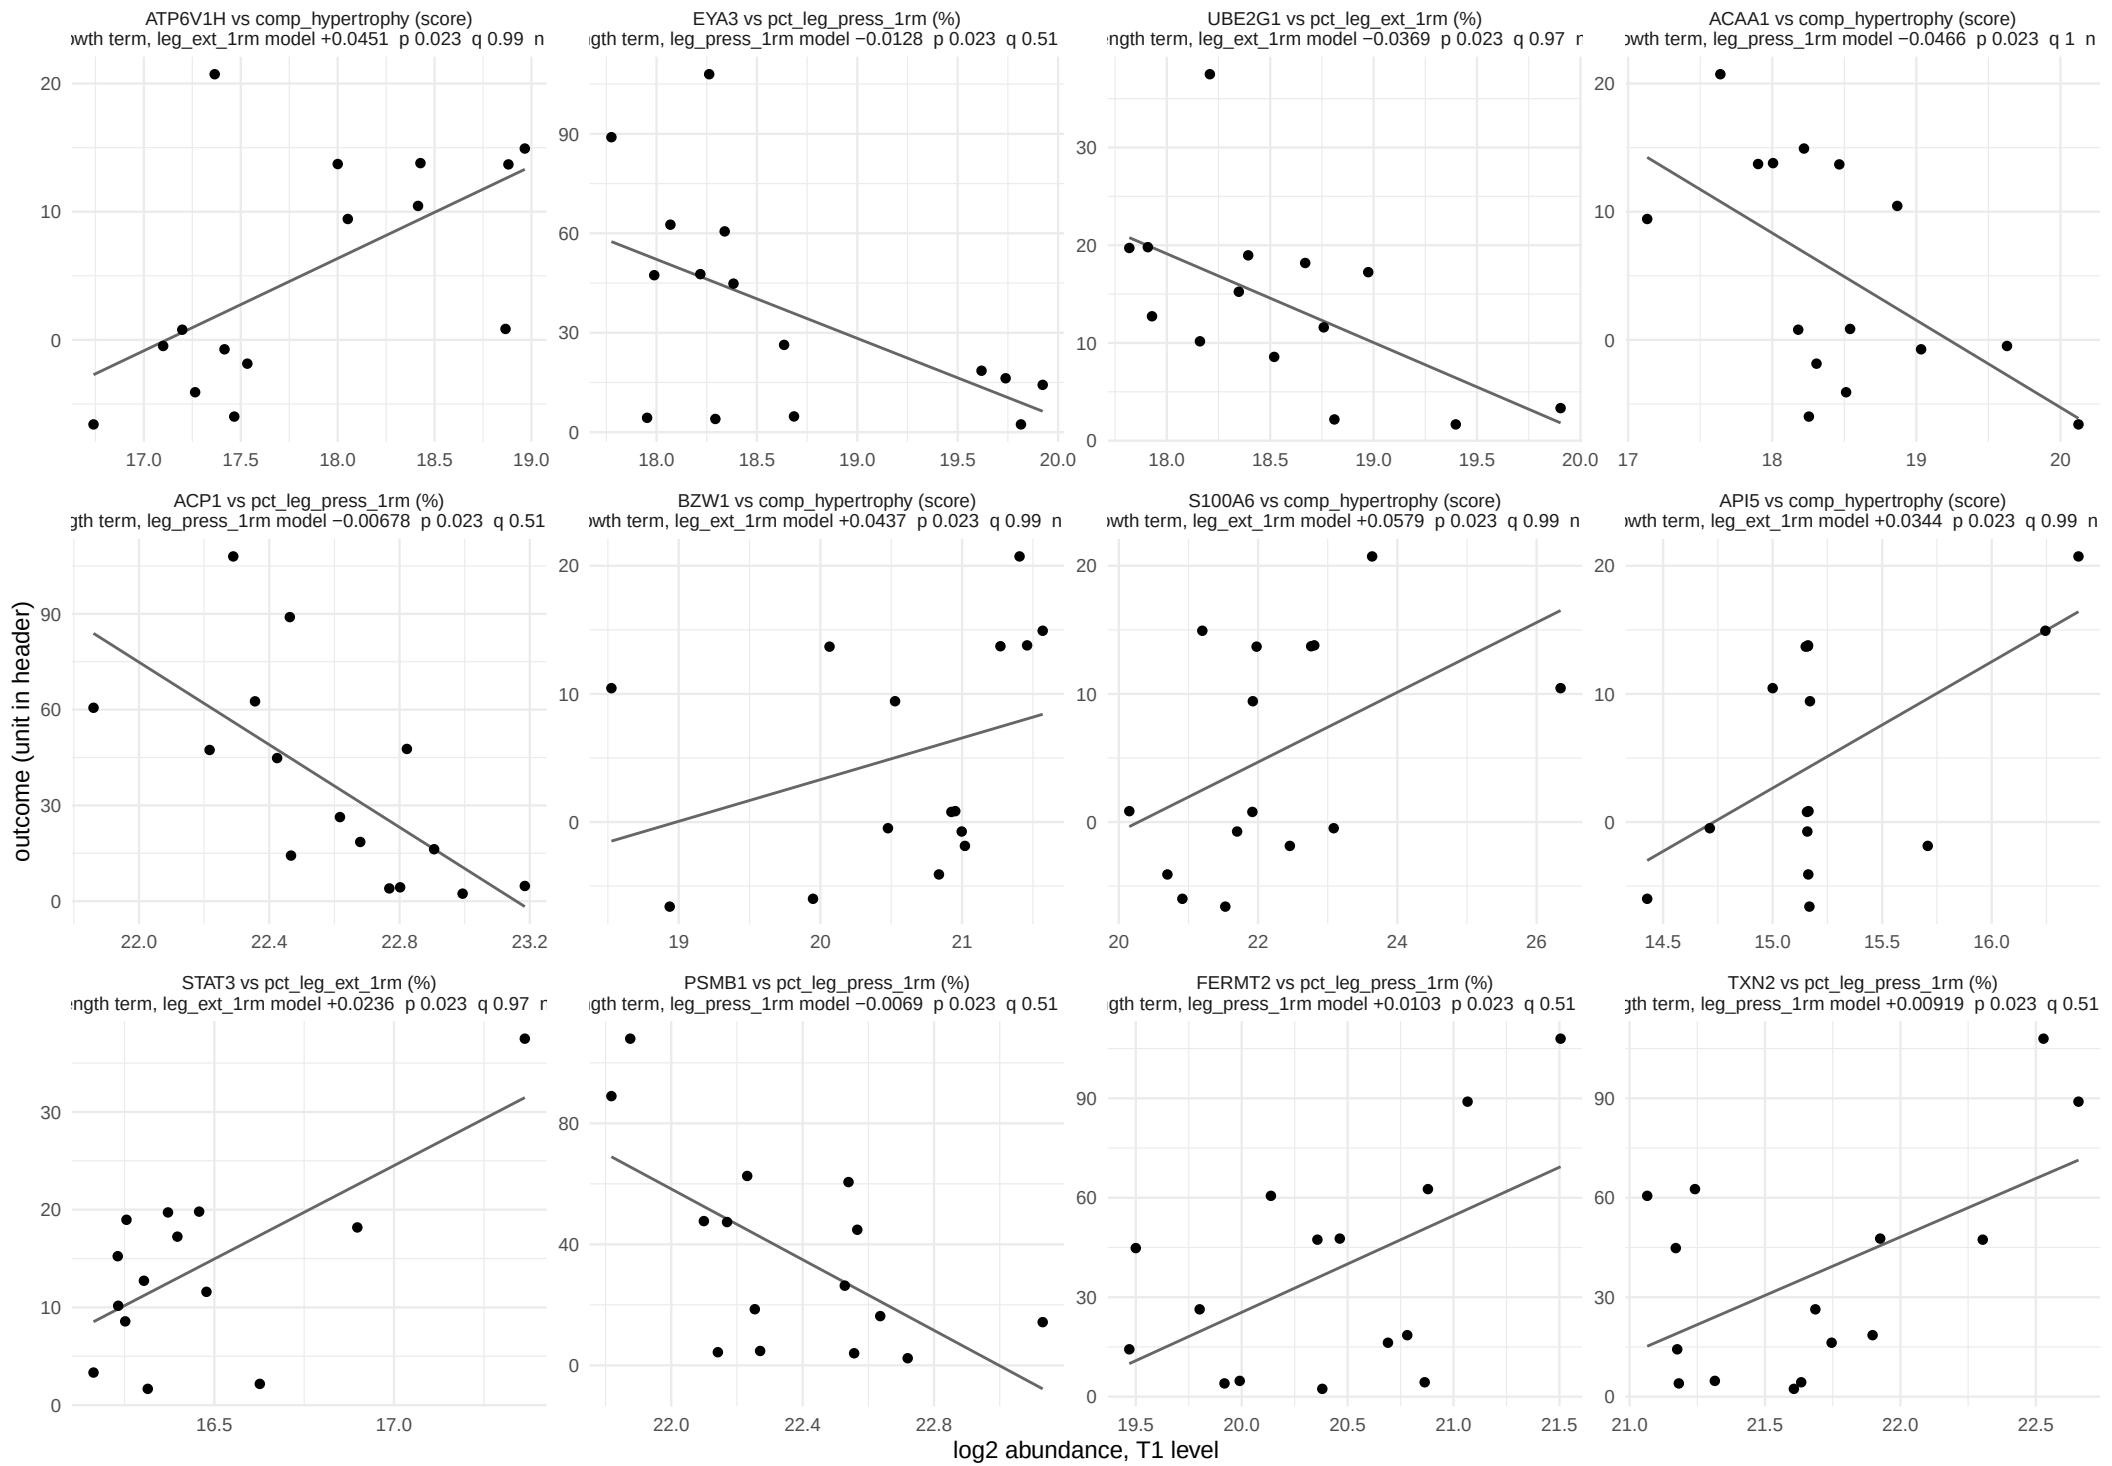

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/01_proteins.xlsx, two_predictor.

Two predictor, baseline window


391 of 7600 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 16 of 33.

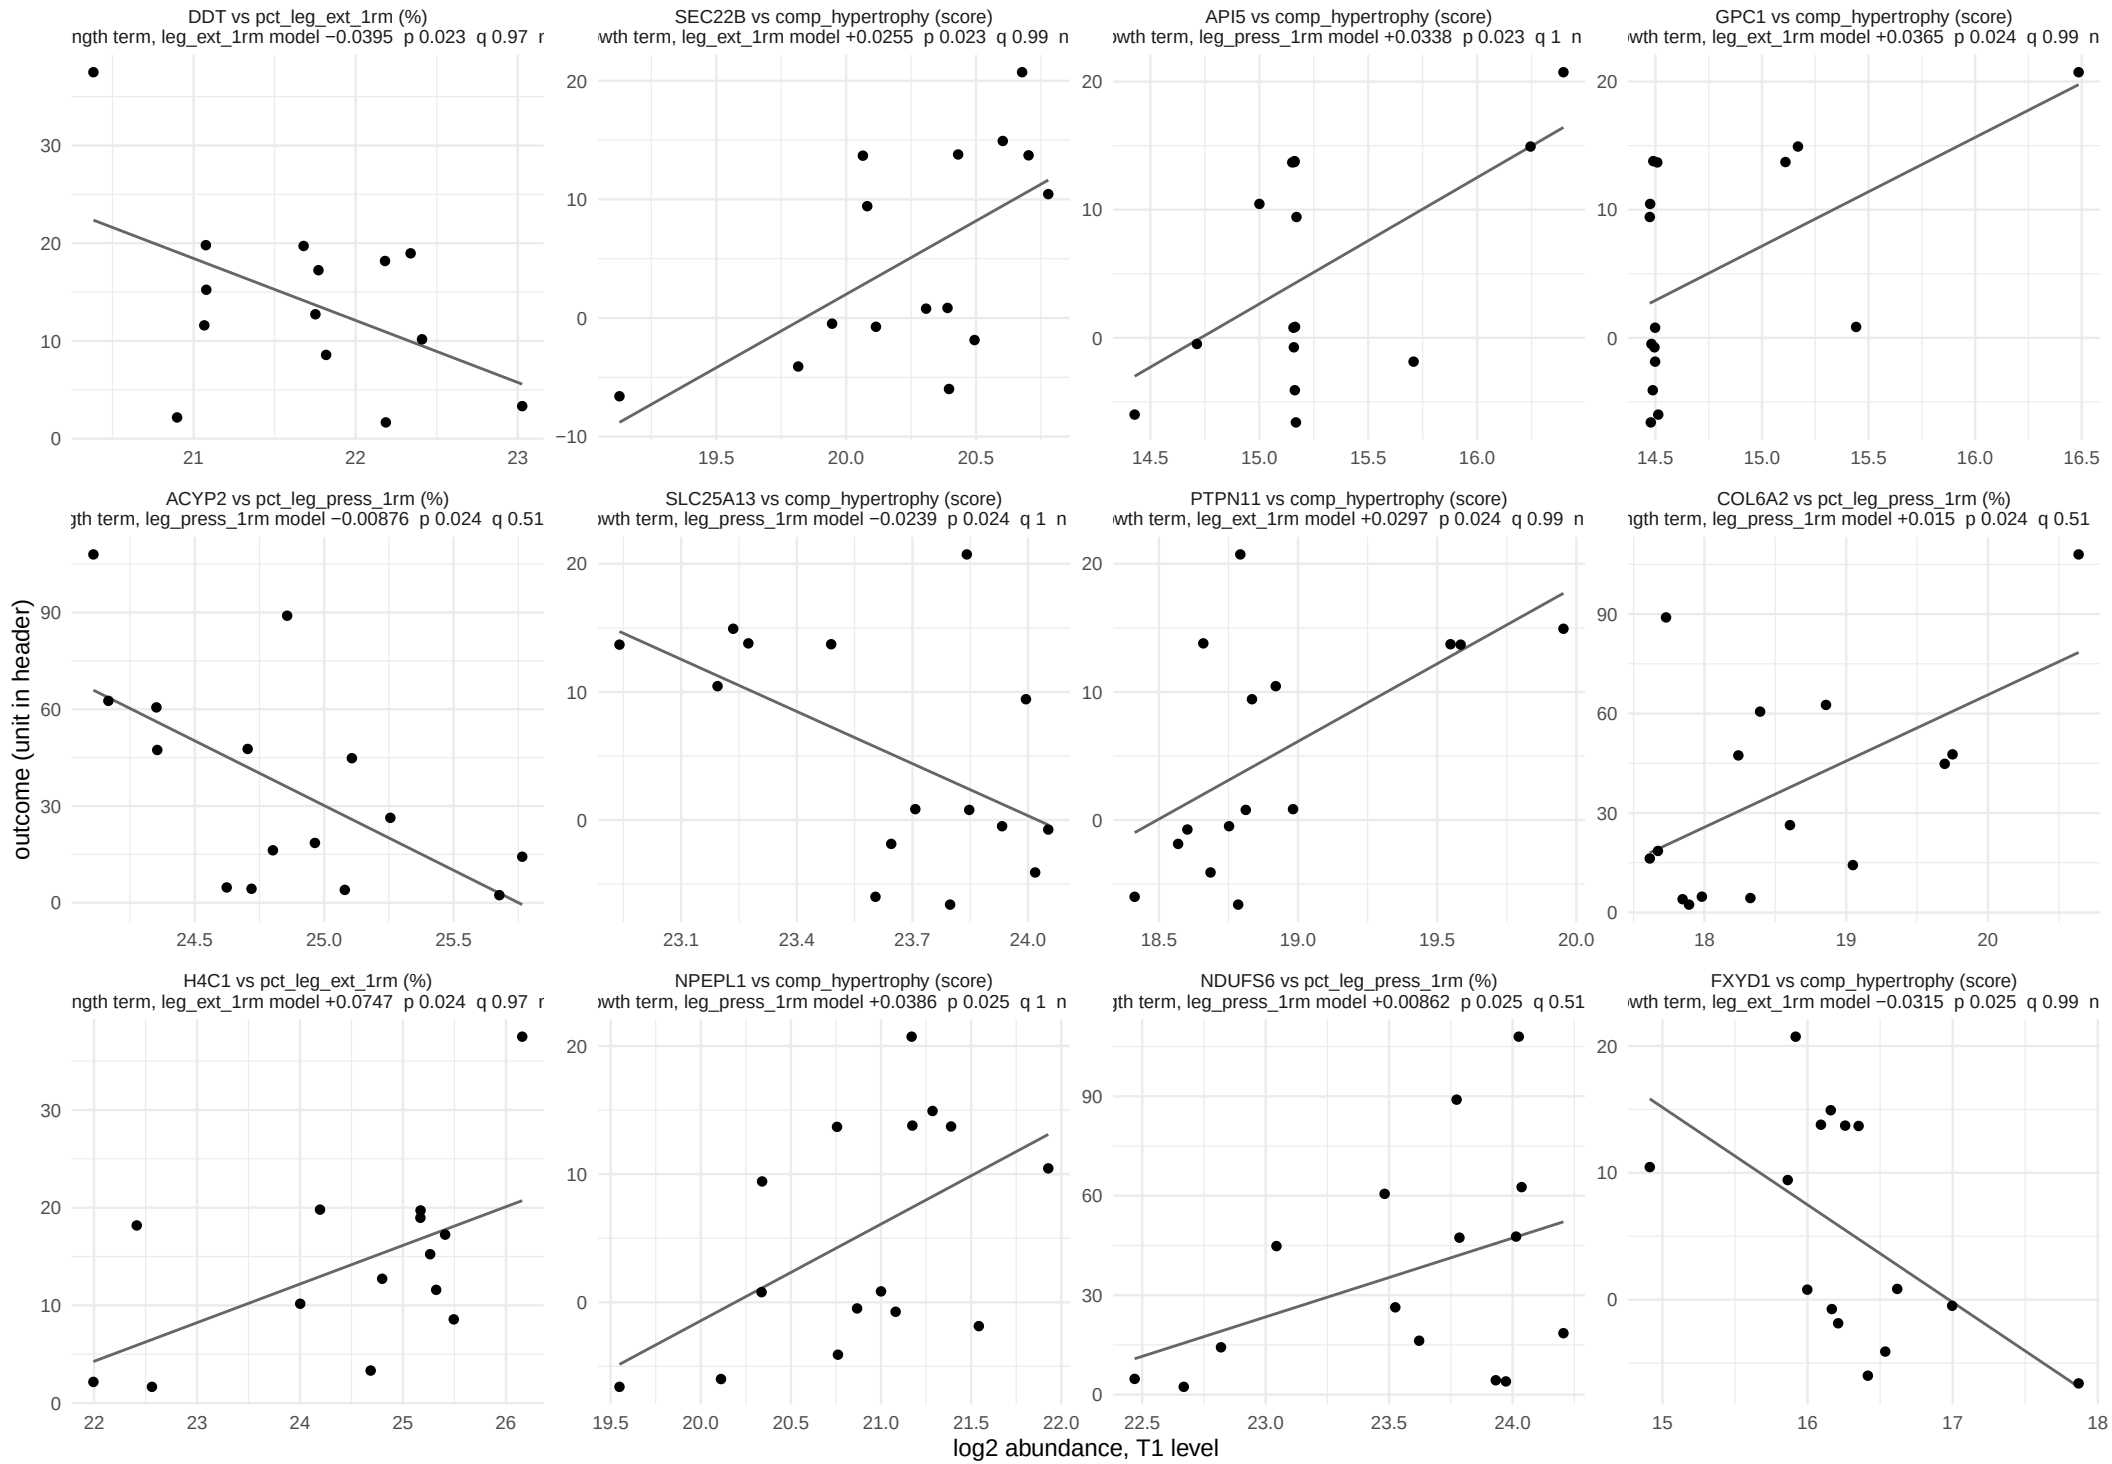

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/01_proteins.xlsx, two_predictor.

Two predictor, baseline window


391 of 7600 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 17 of 33.

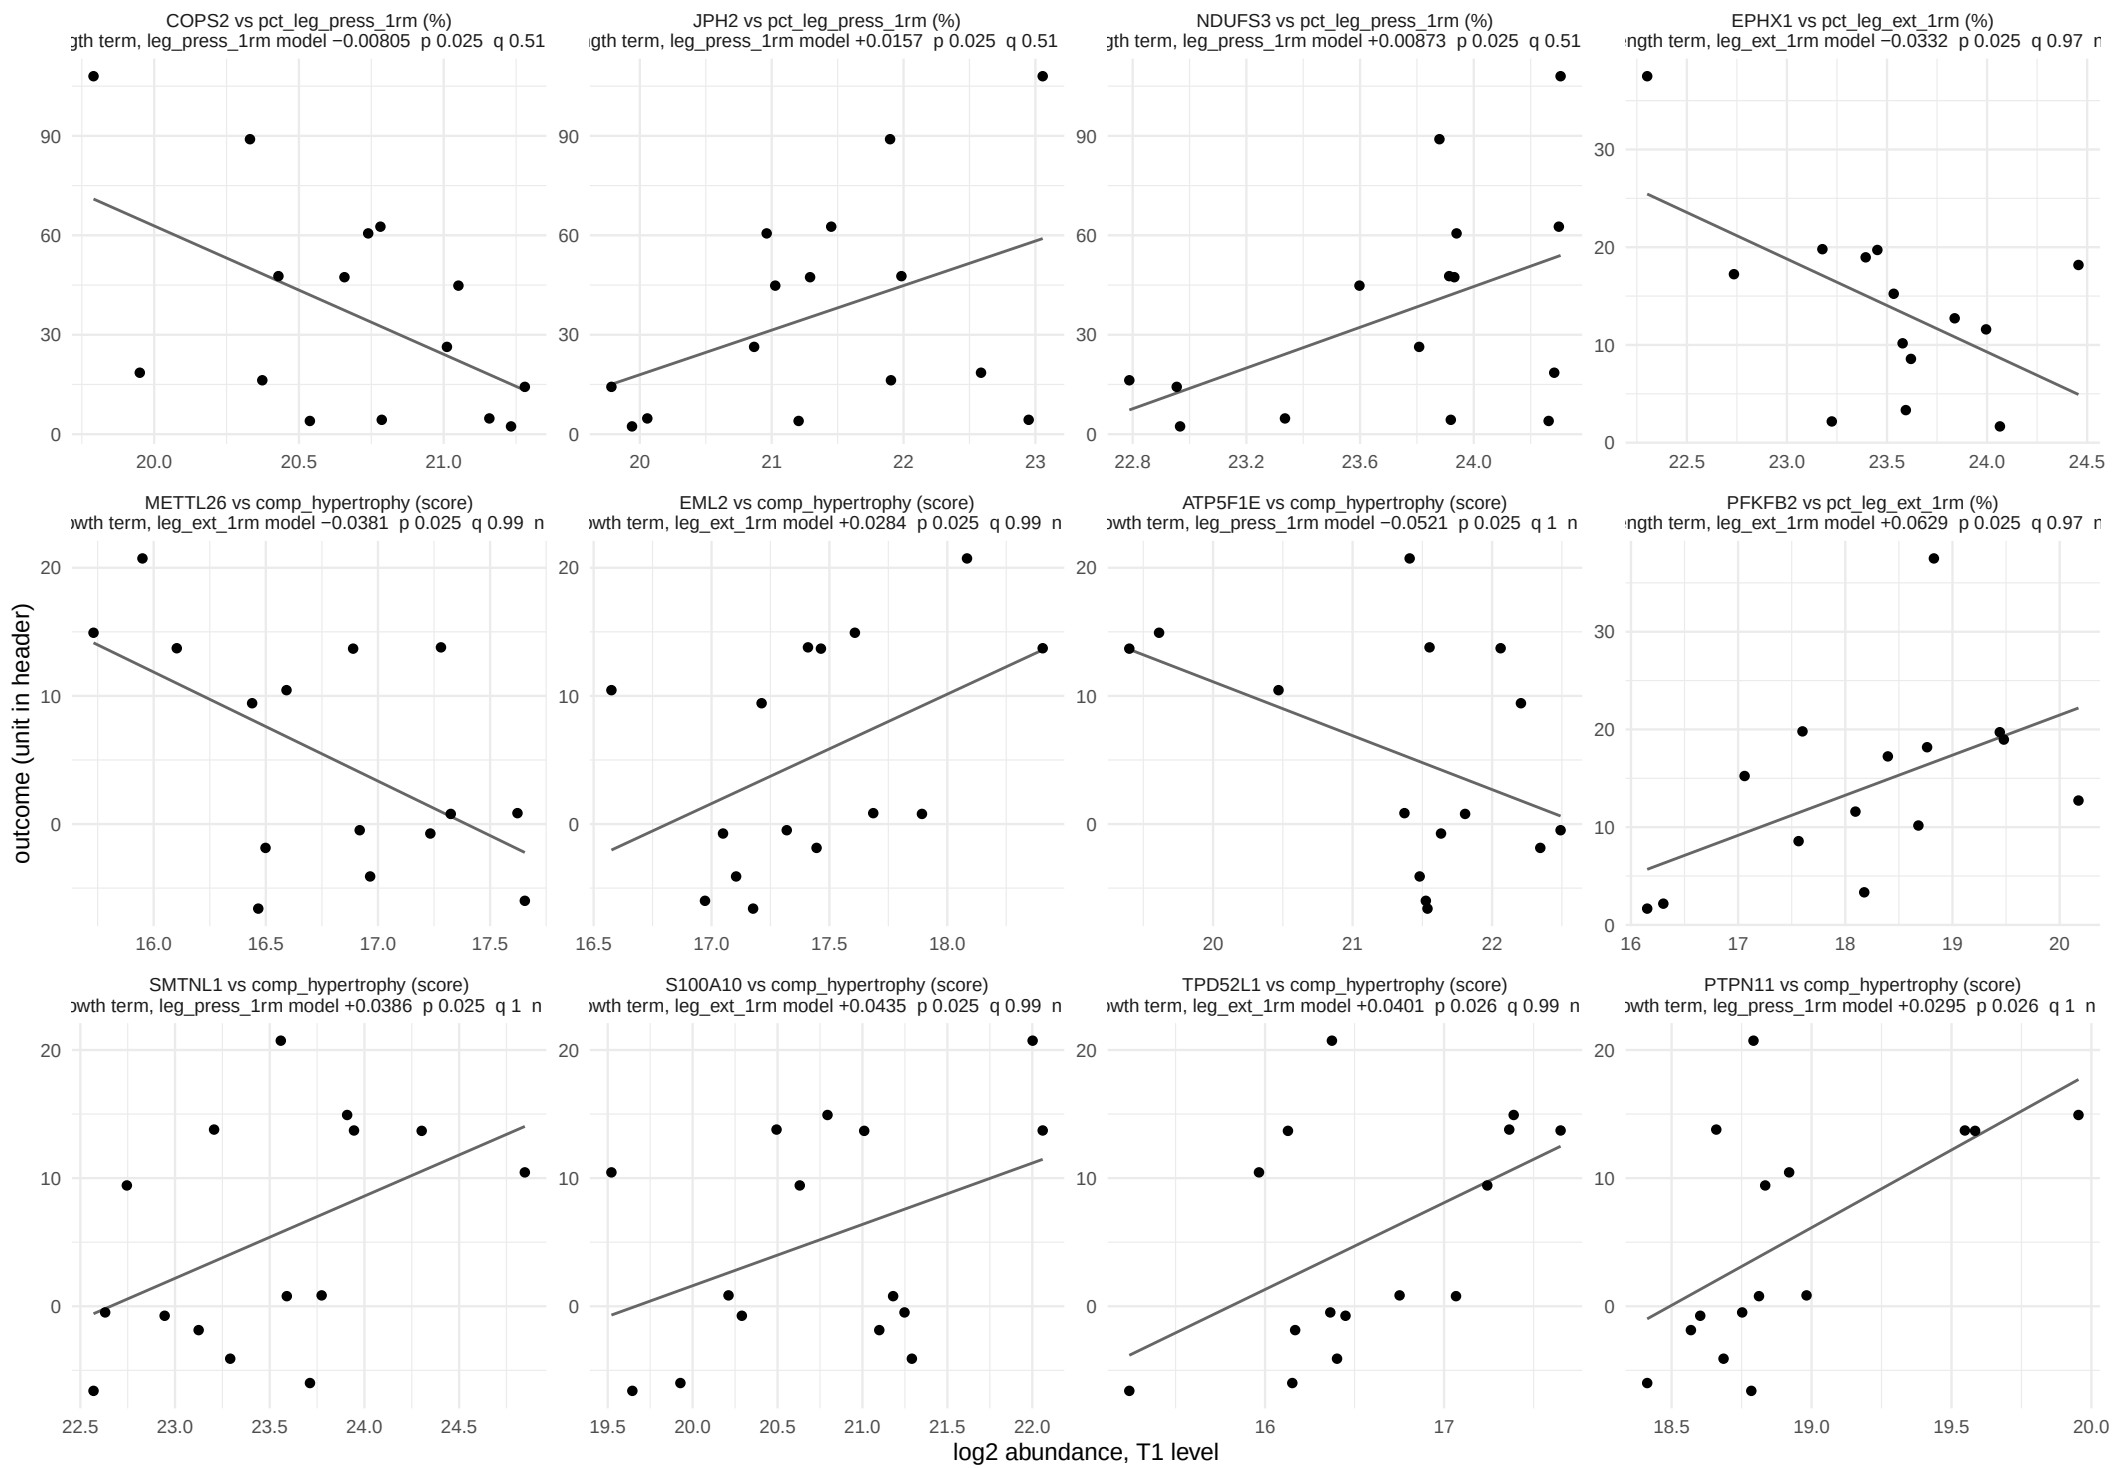

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/01_proteins.xlsx, two_predictor.

Two predictor, baseline window


391 of 7600 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 18 of 33.

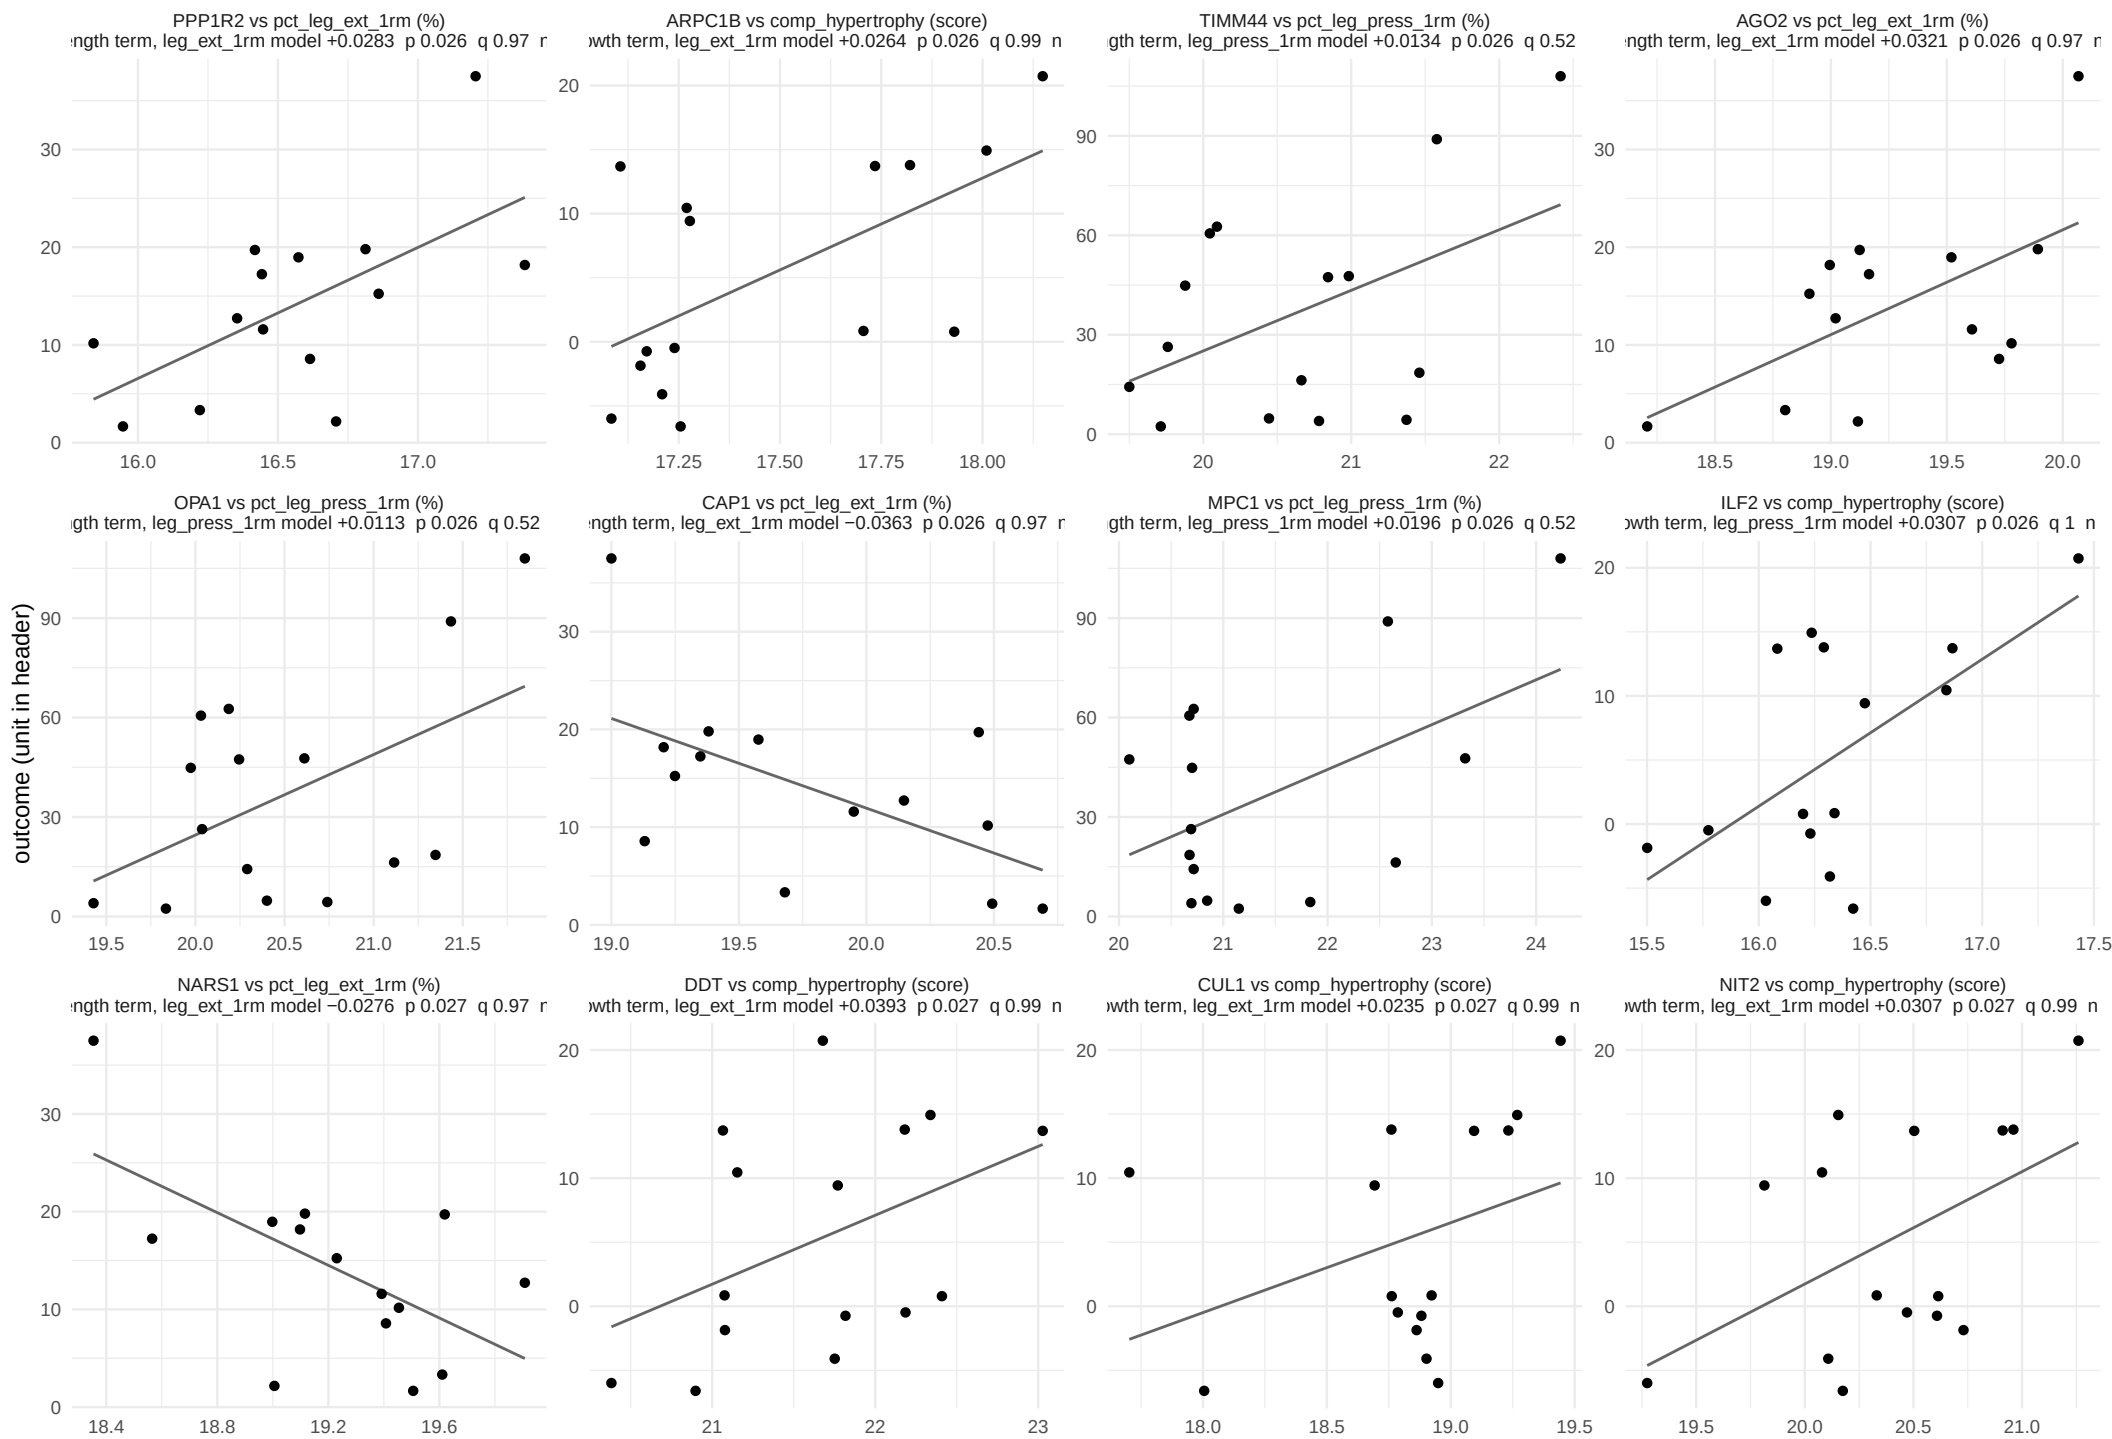

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/01_proteins.xlsx, two_predictor.

Two predictor, baseline window


391 of 7600 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 19 of 33.

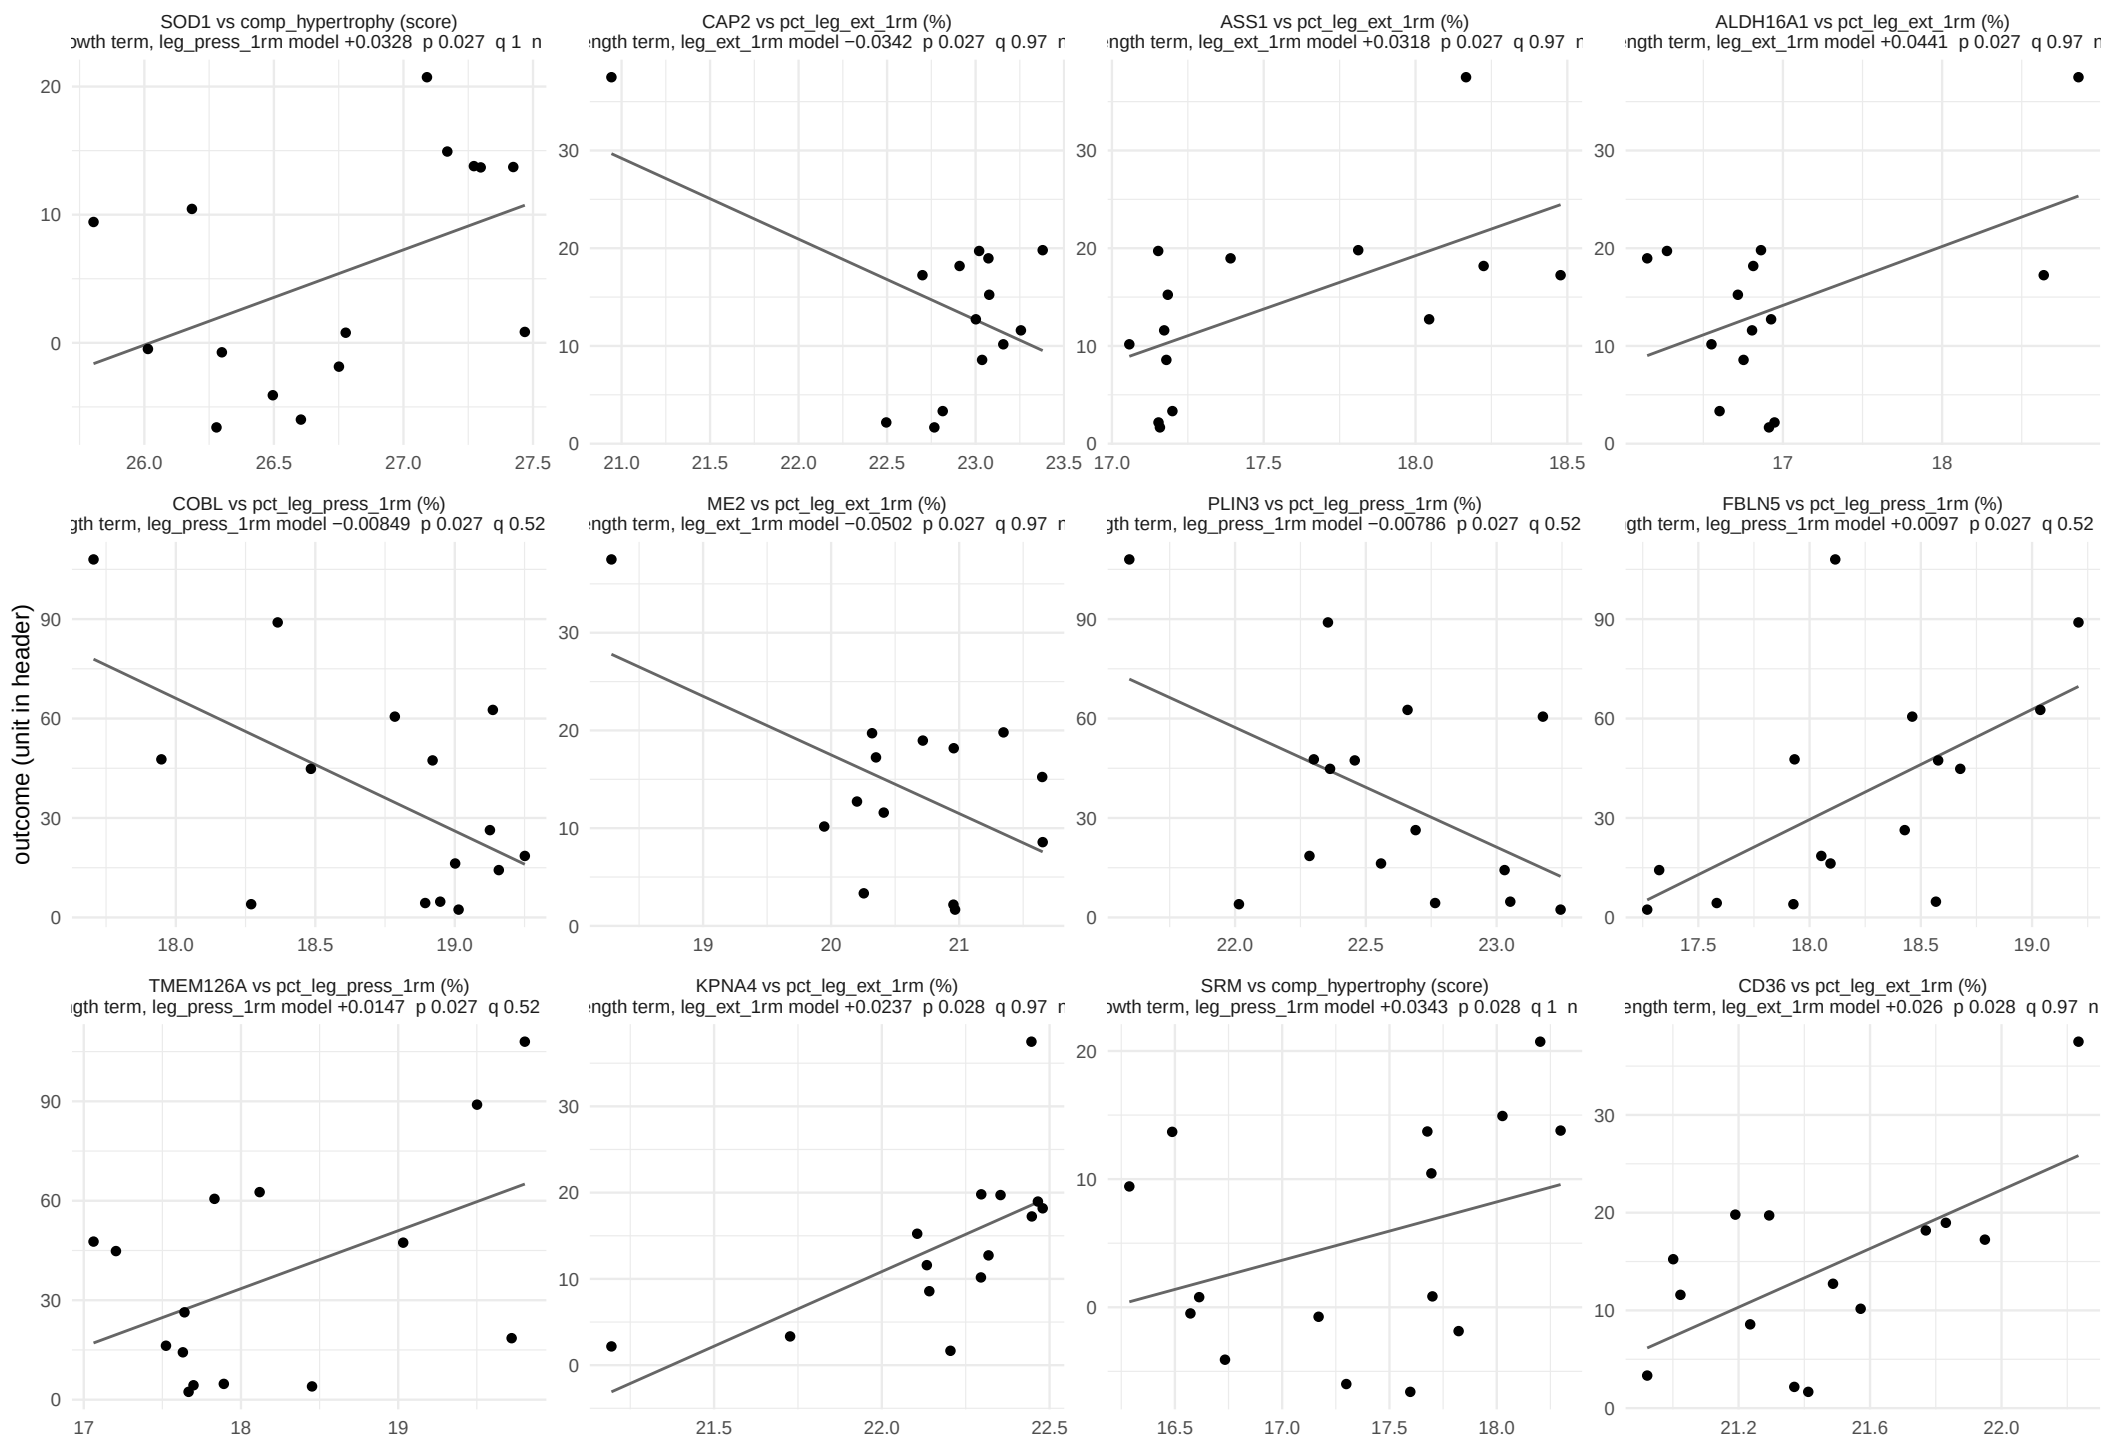

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/01_proteins.xlsx, two_predictor.

Two predictor, baseline window


391 of 7600 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 20 of 33.

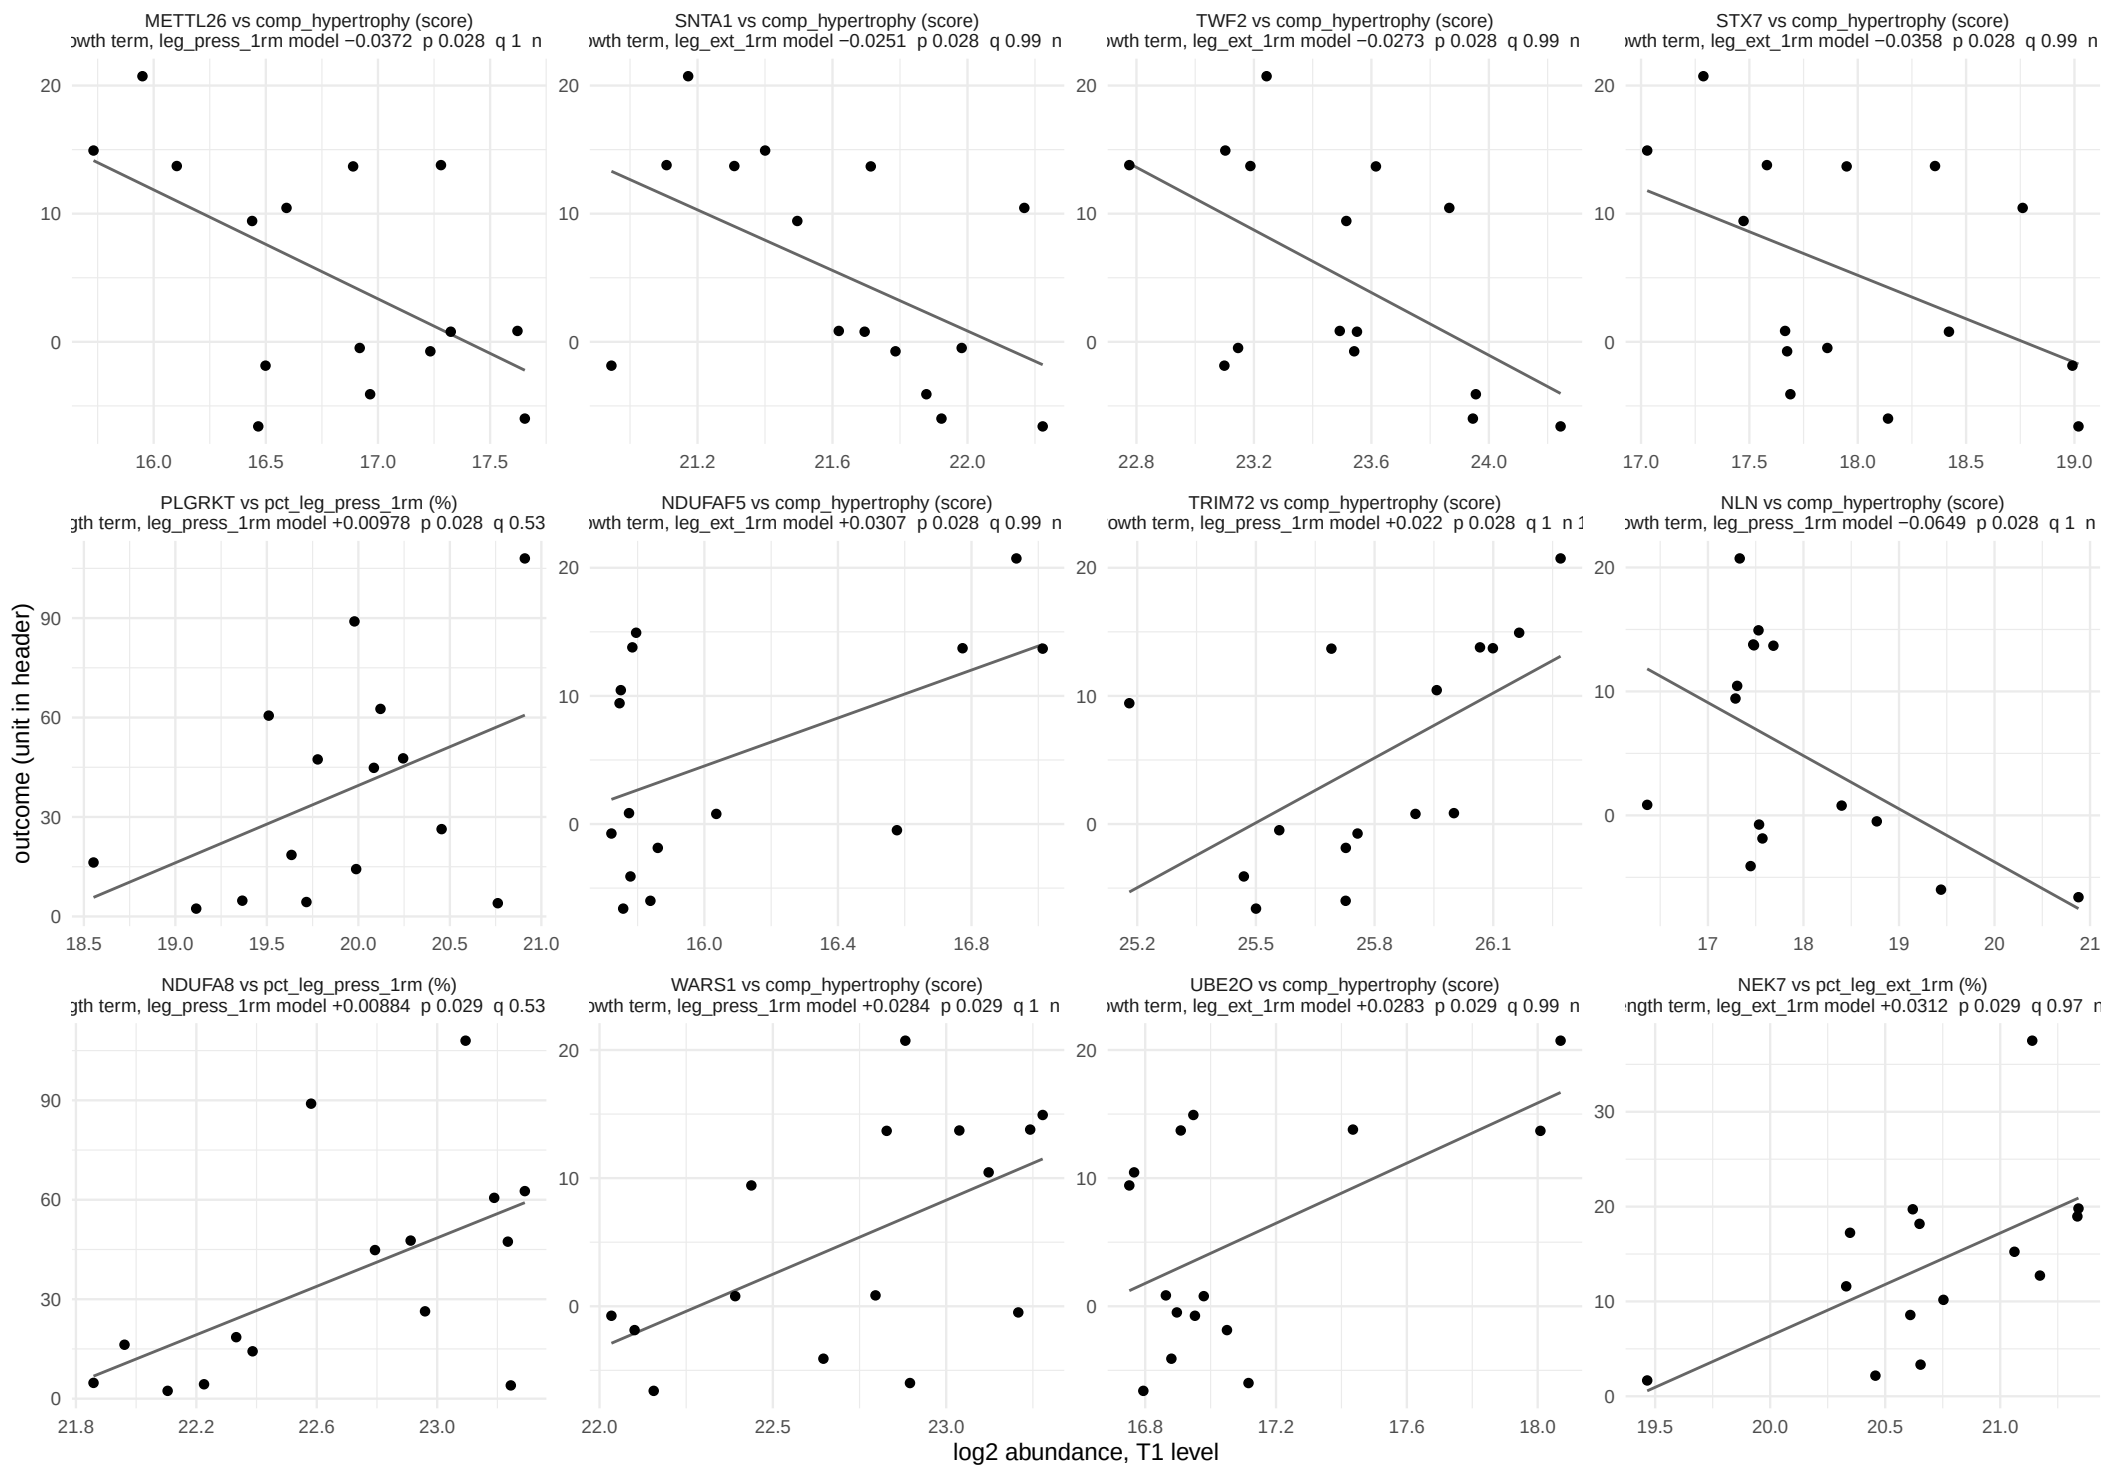

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/01_proteins.xlsx, two_predictor.

Two predictor, baseline window


391 of 7600 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 21 of 33.

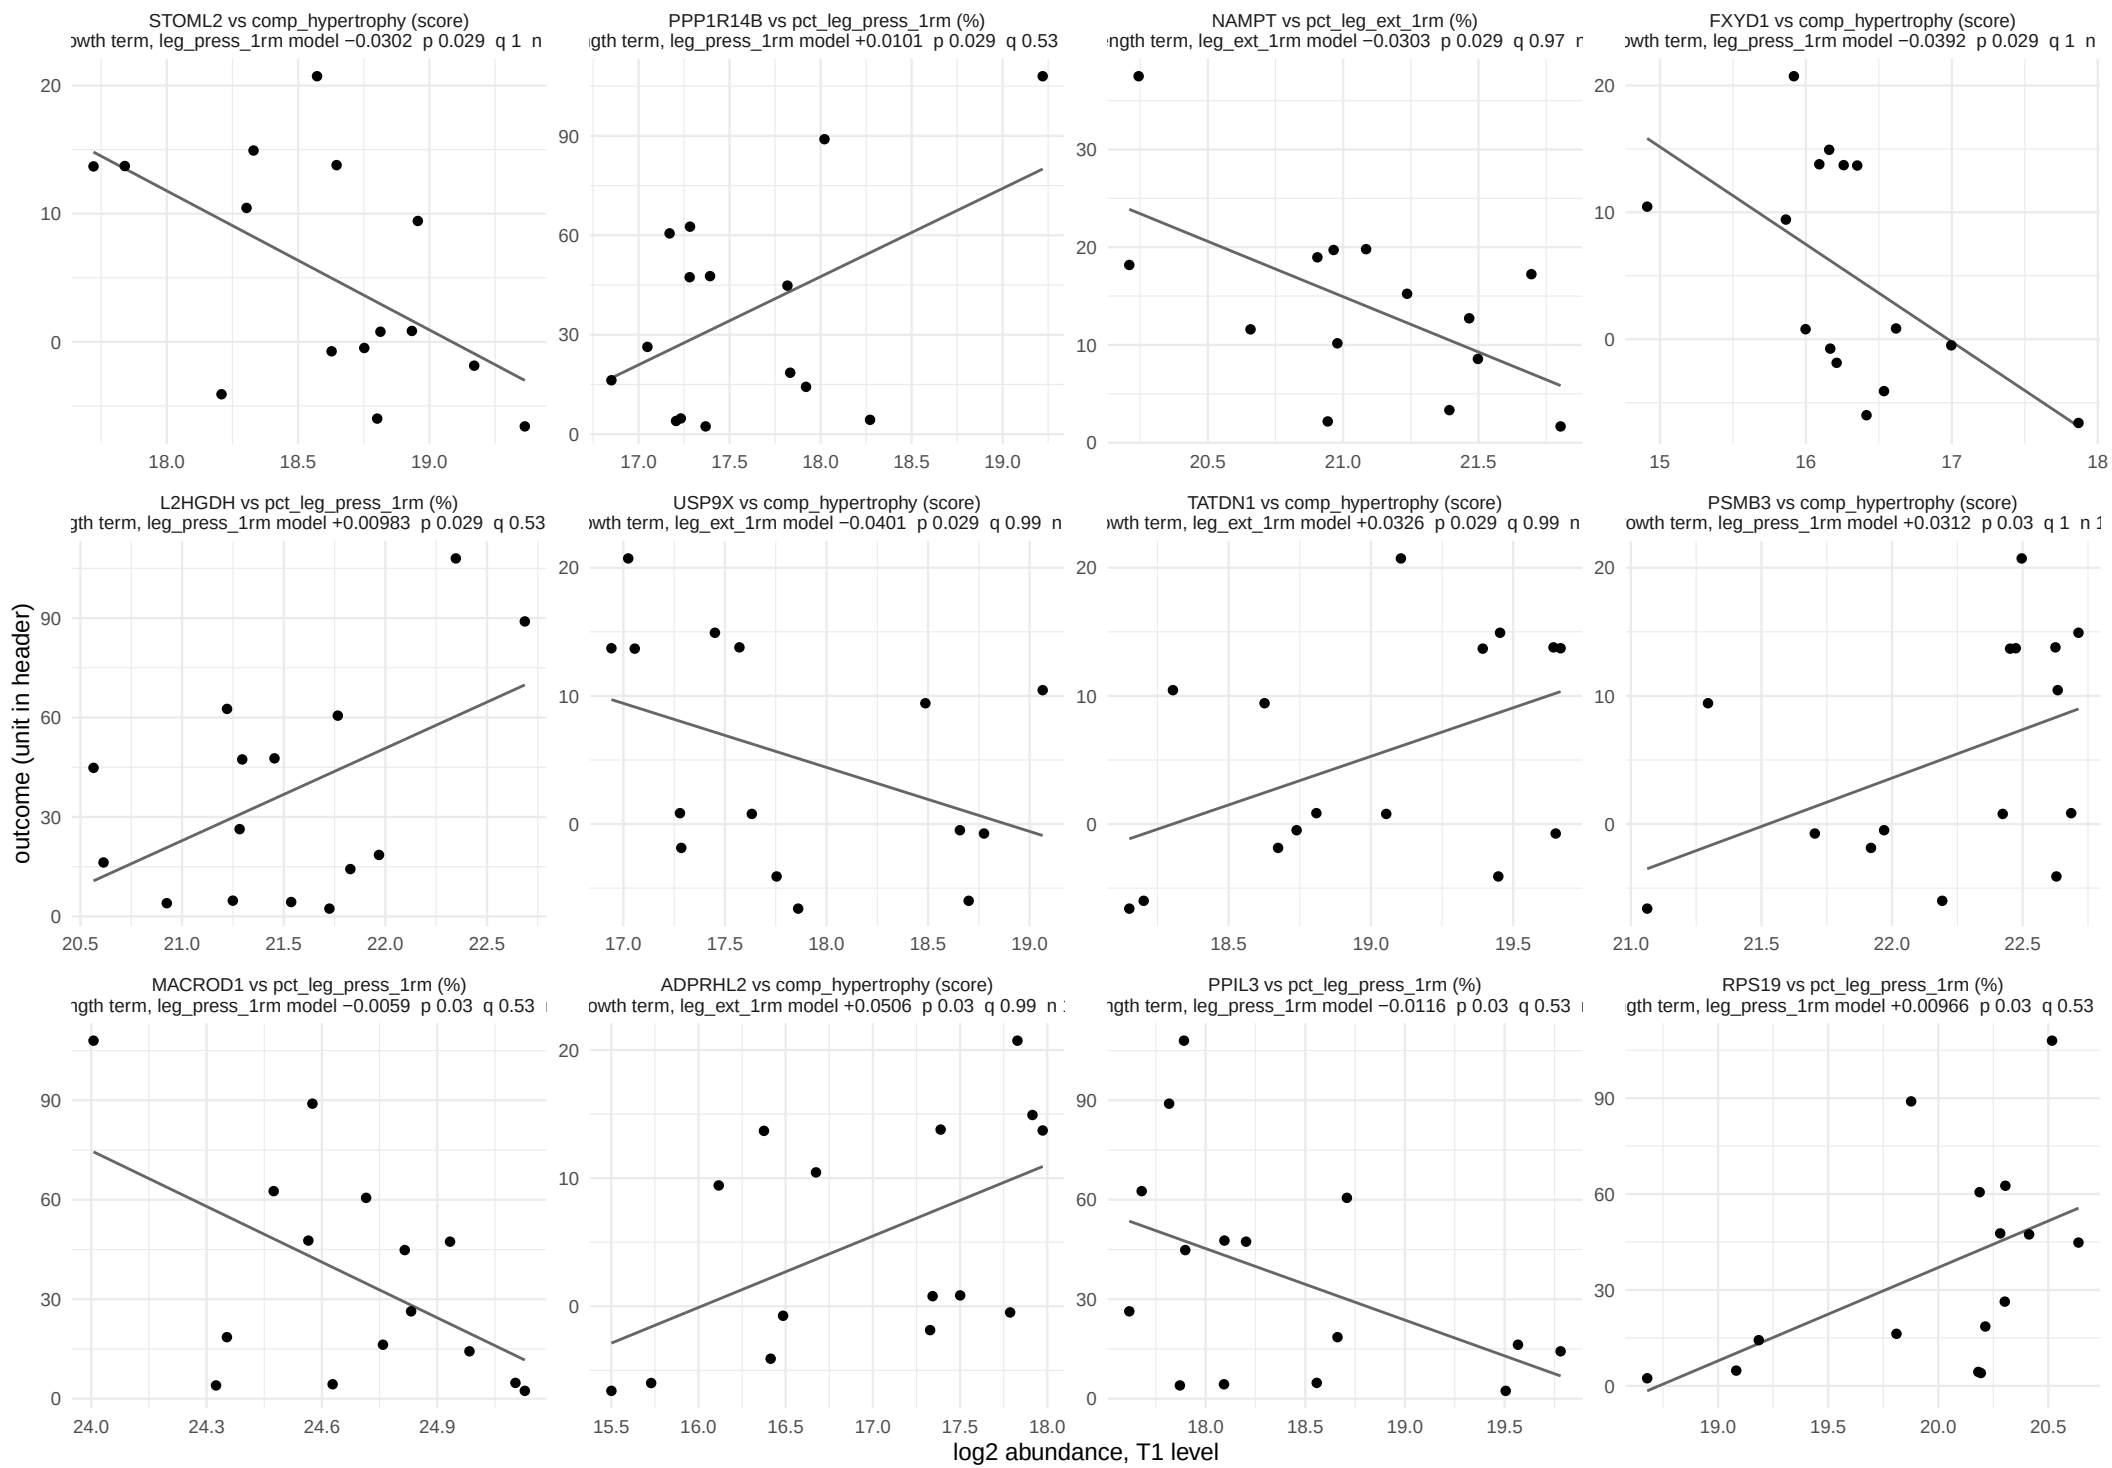

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/01_proteins.xlsx, two_predictor.

Two predictor, baseline window


391 of 7600 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 22 of 33.

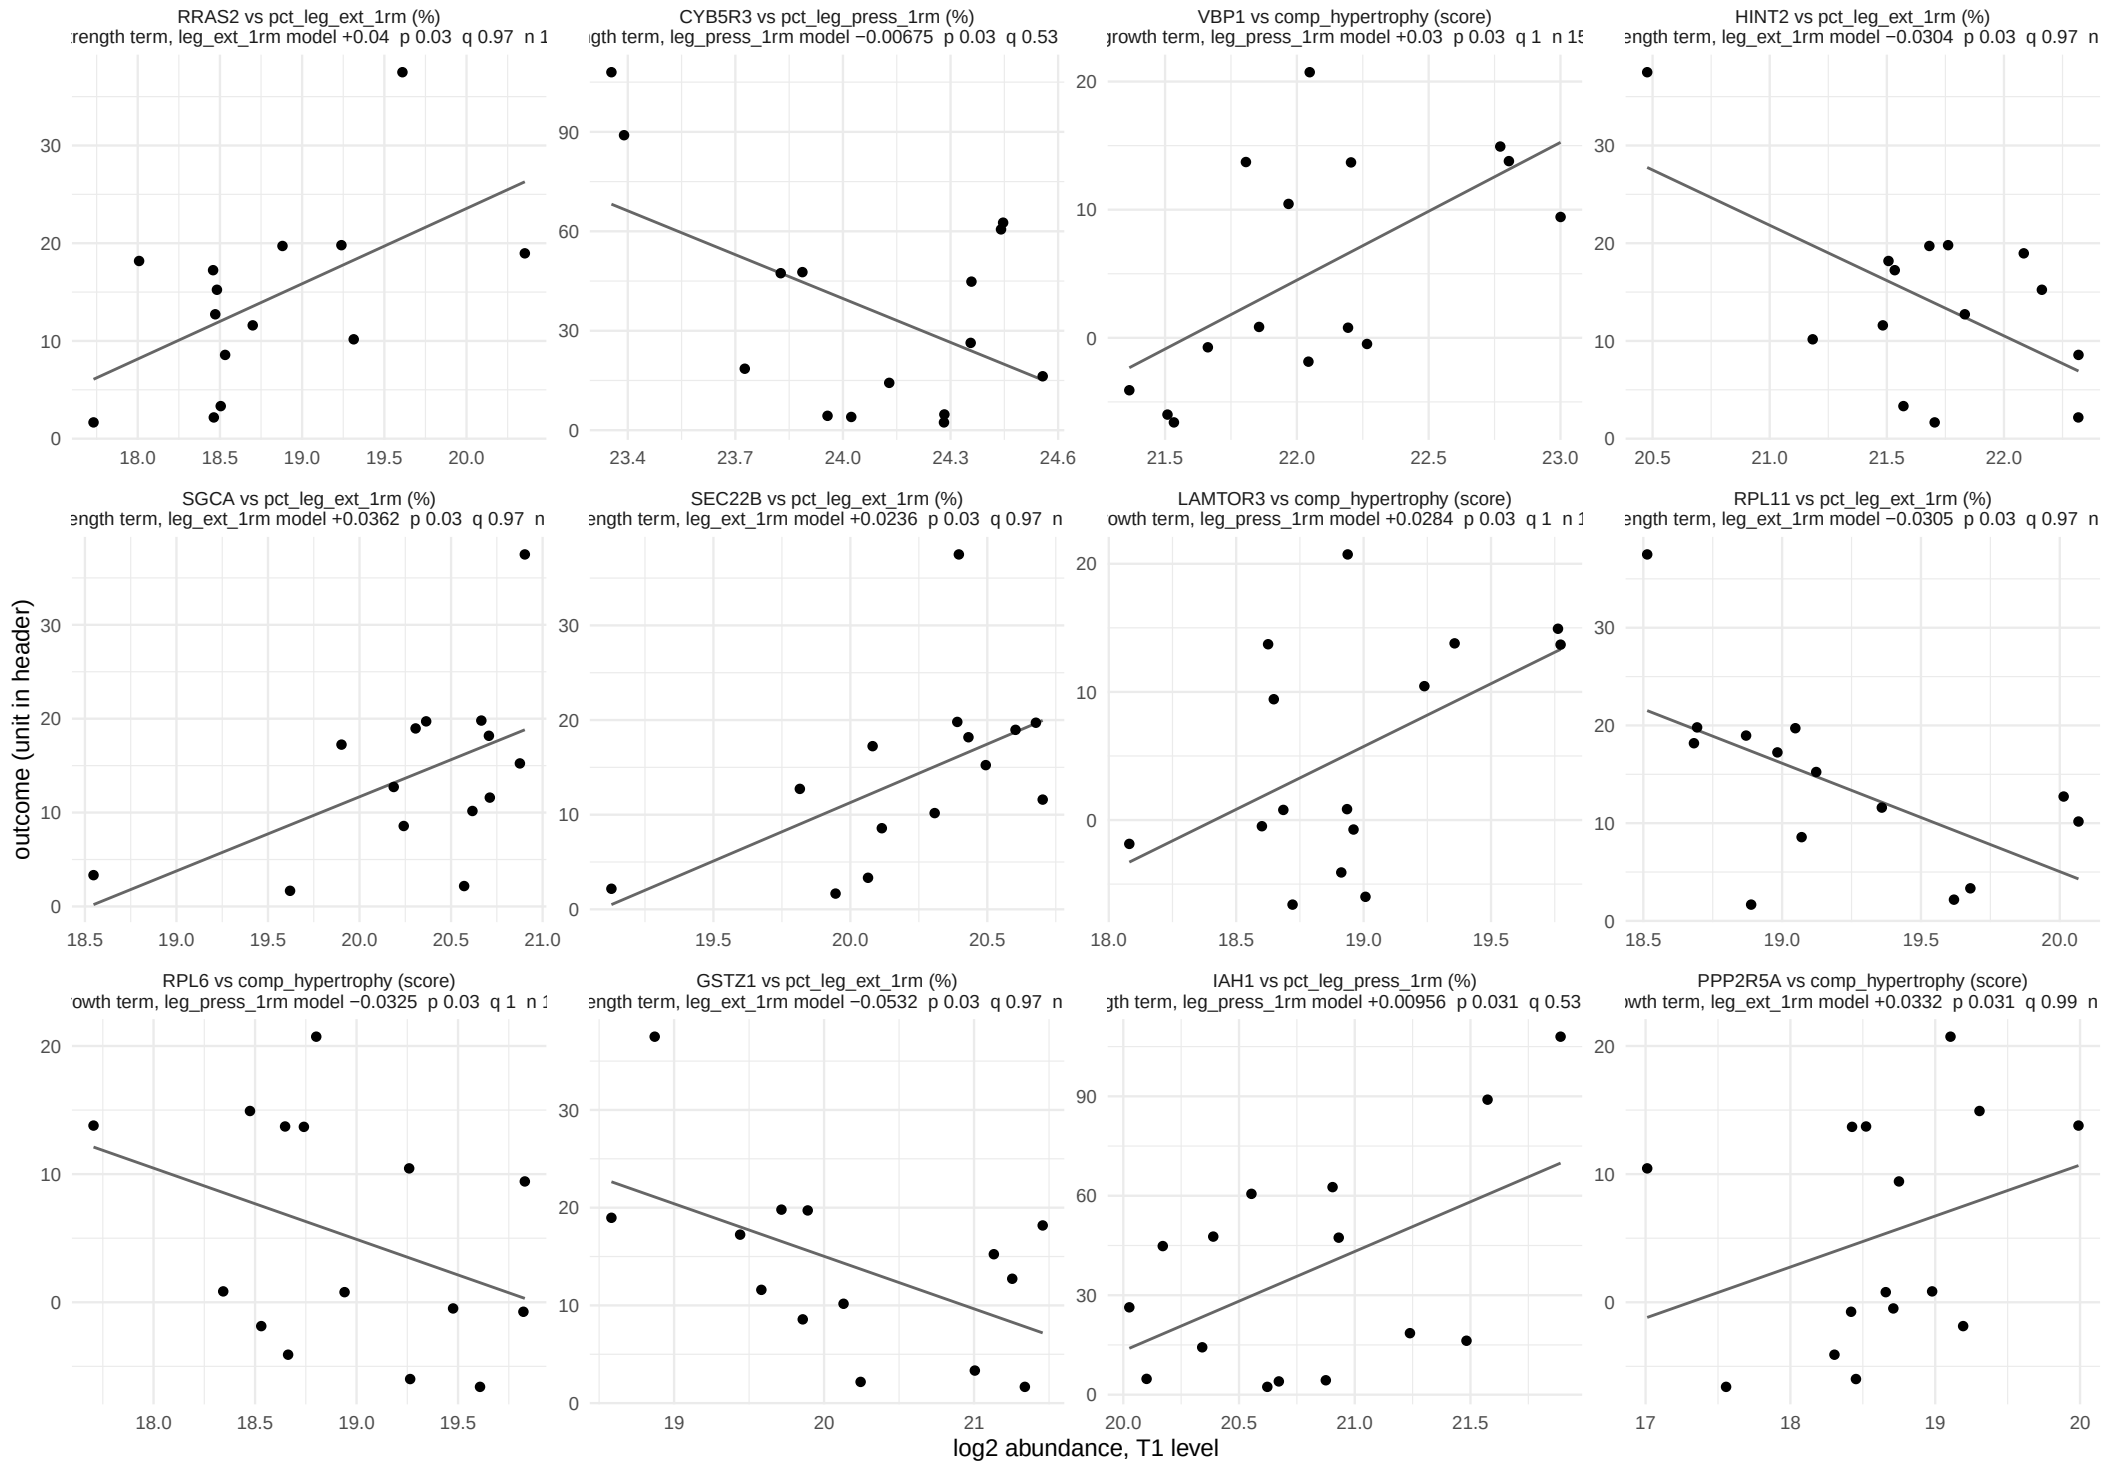

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/01_proteins.xlsx, two_predictor.

Two predictor, baseline window


391 of 7600 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 23 of 33.

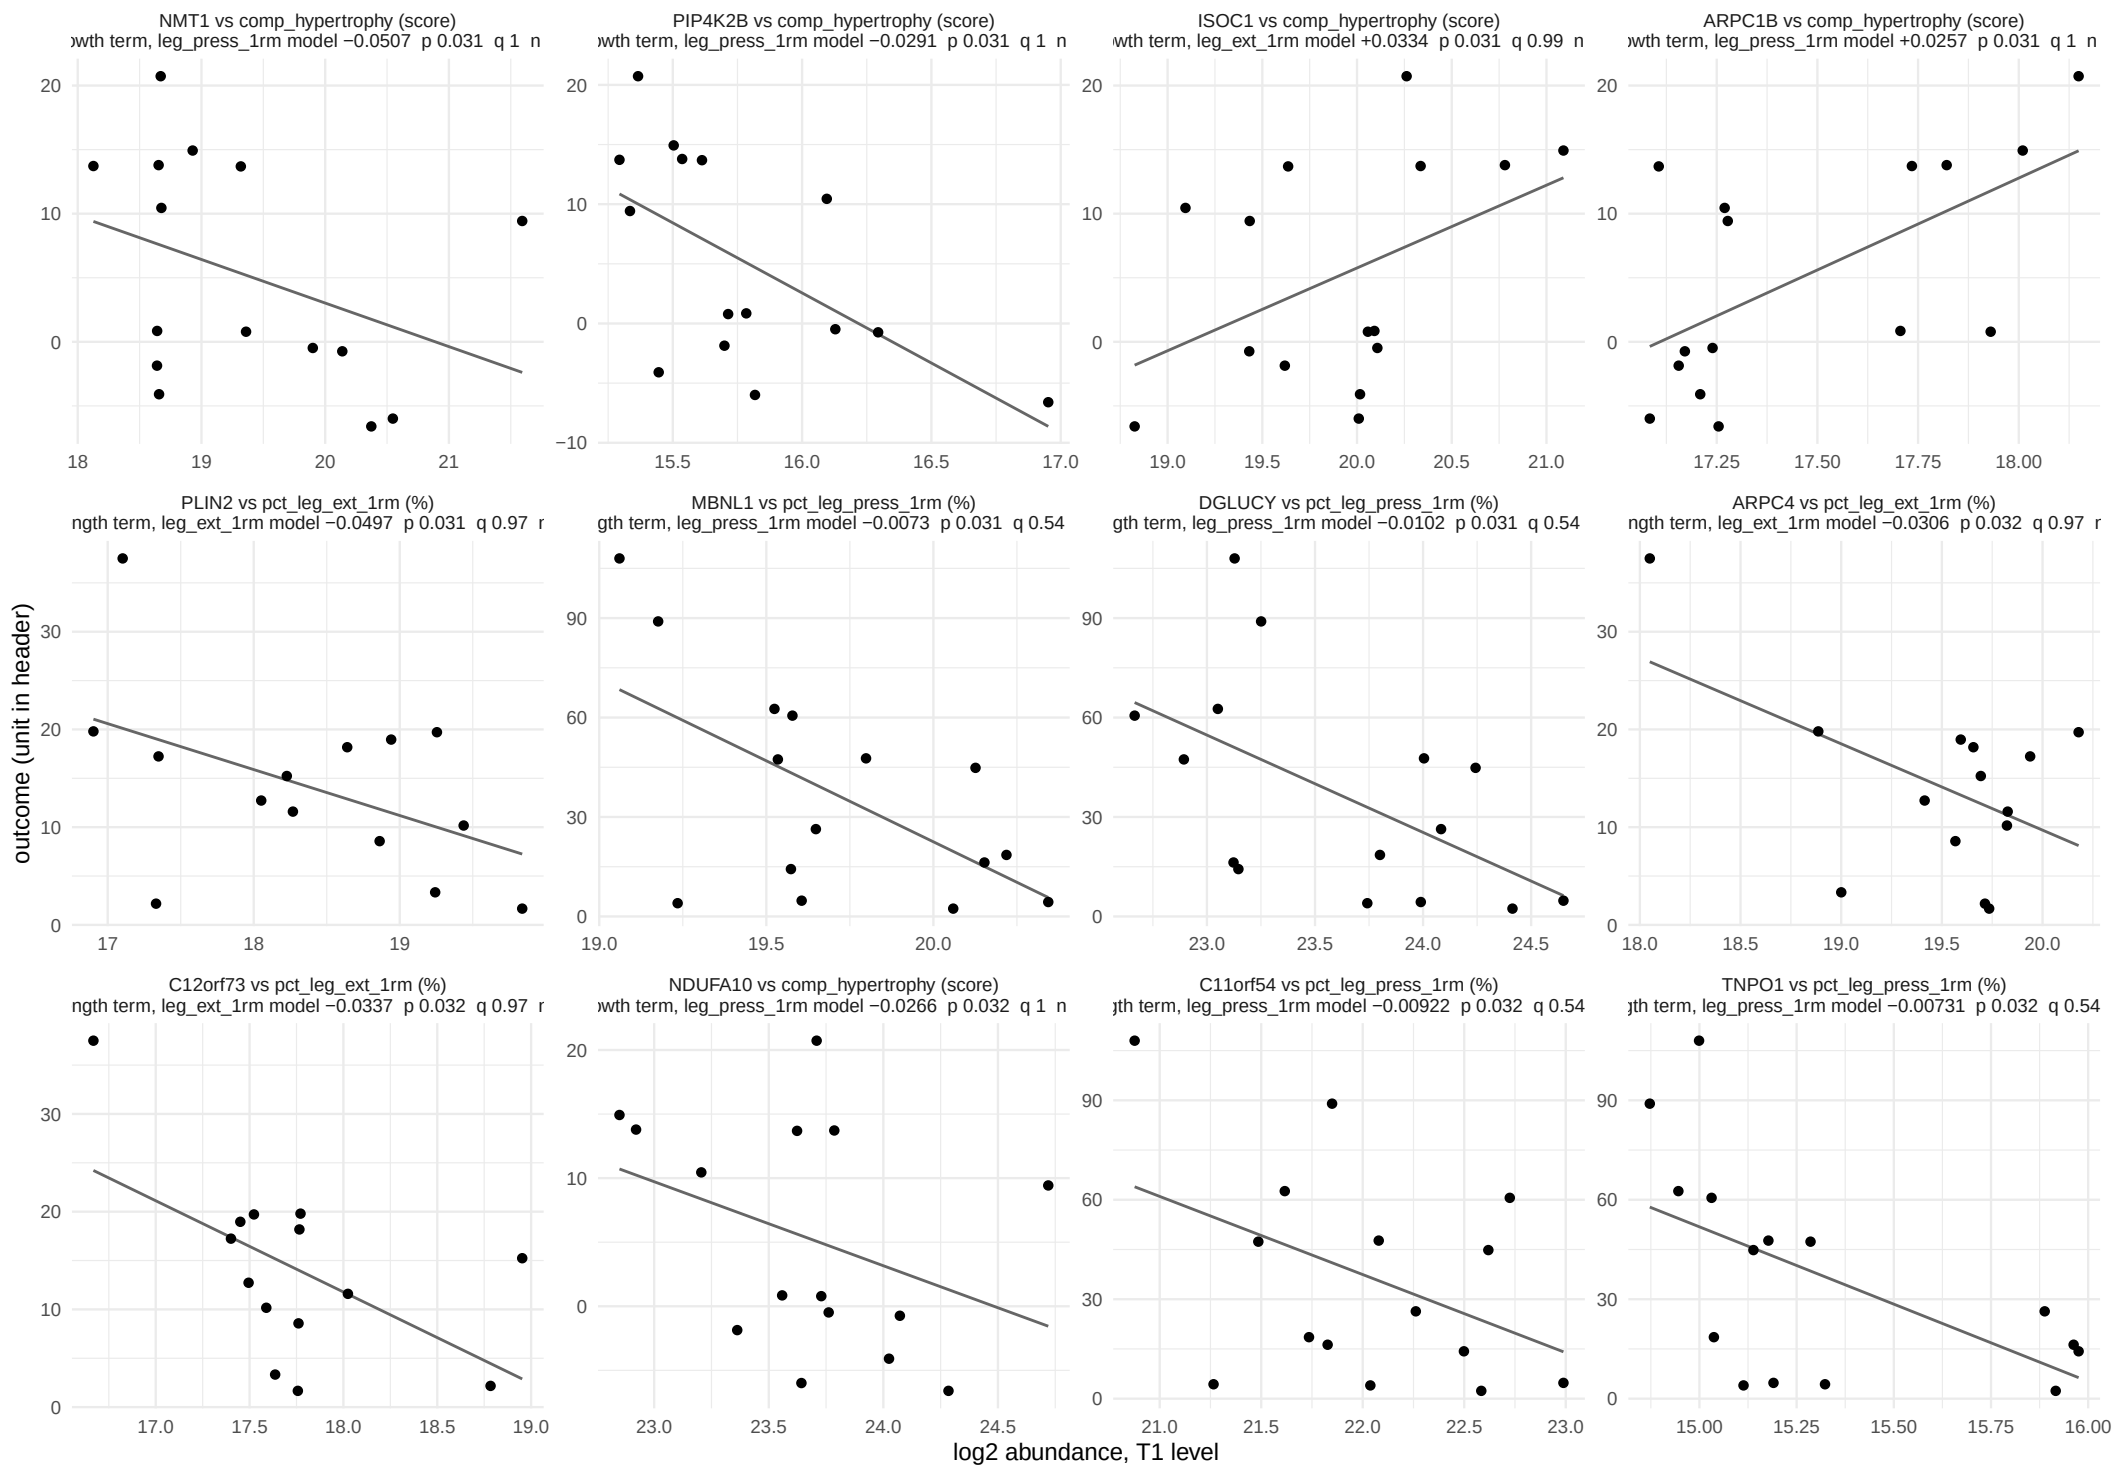

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/01_proteins.xlsx, two_predictor.

Two predictor, baseline window


391 of 7600 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 24 of 33.

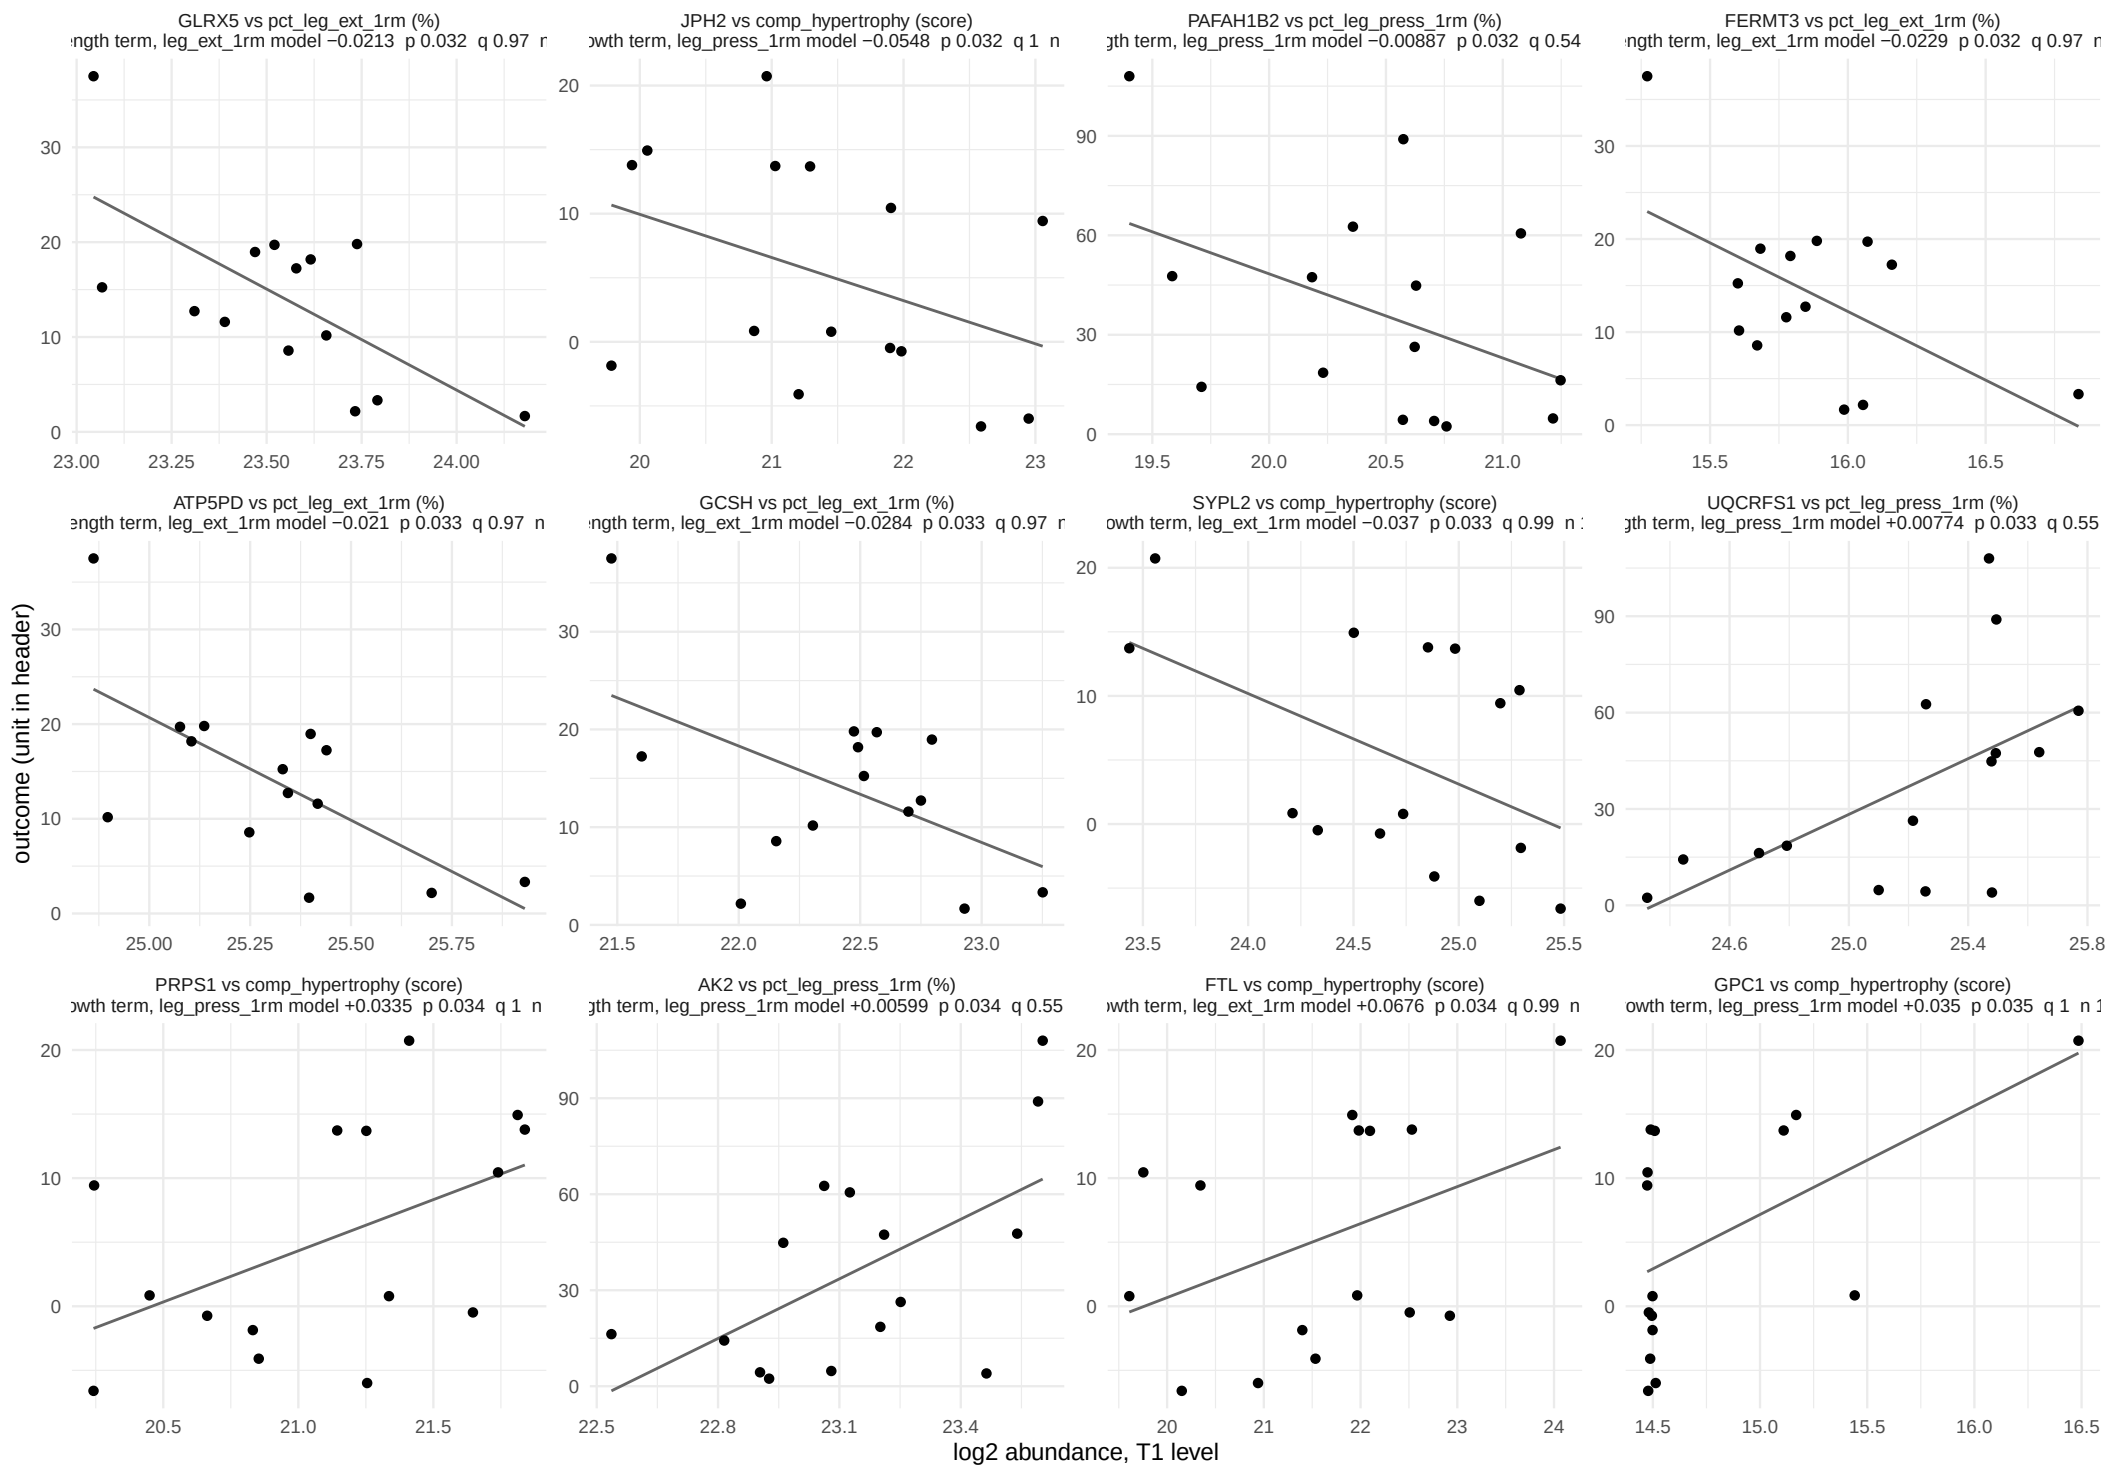

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/01_proteins.xlsx, two_predictor.

Two predictor, baseline window


391 of 7600 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 25 of 33.

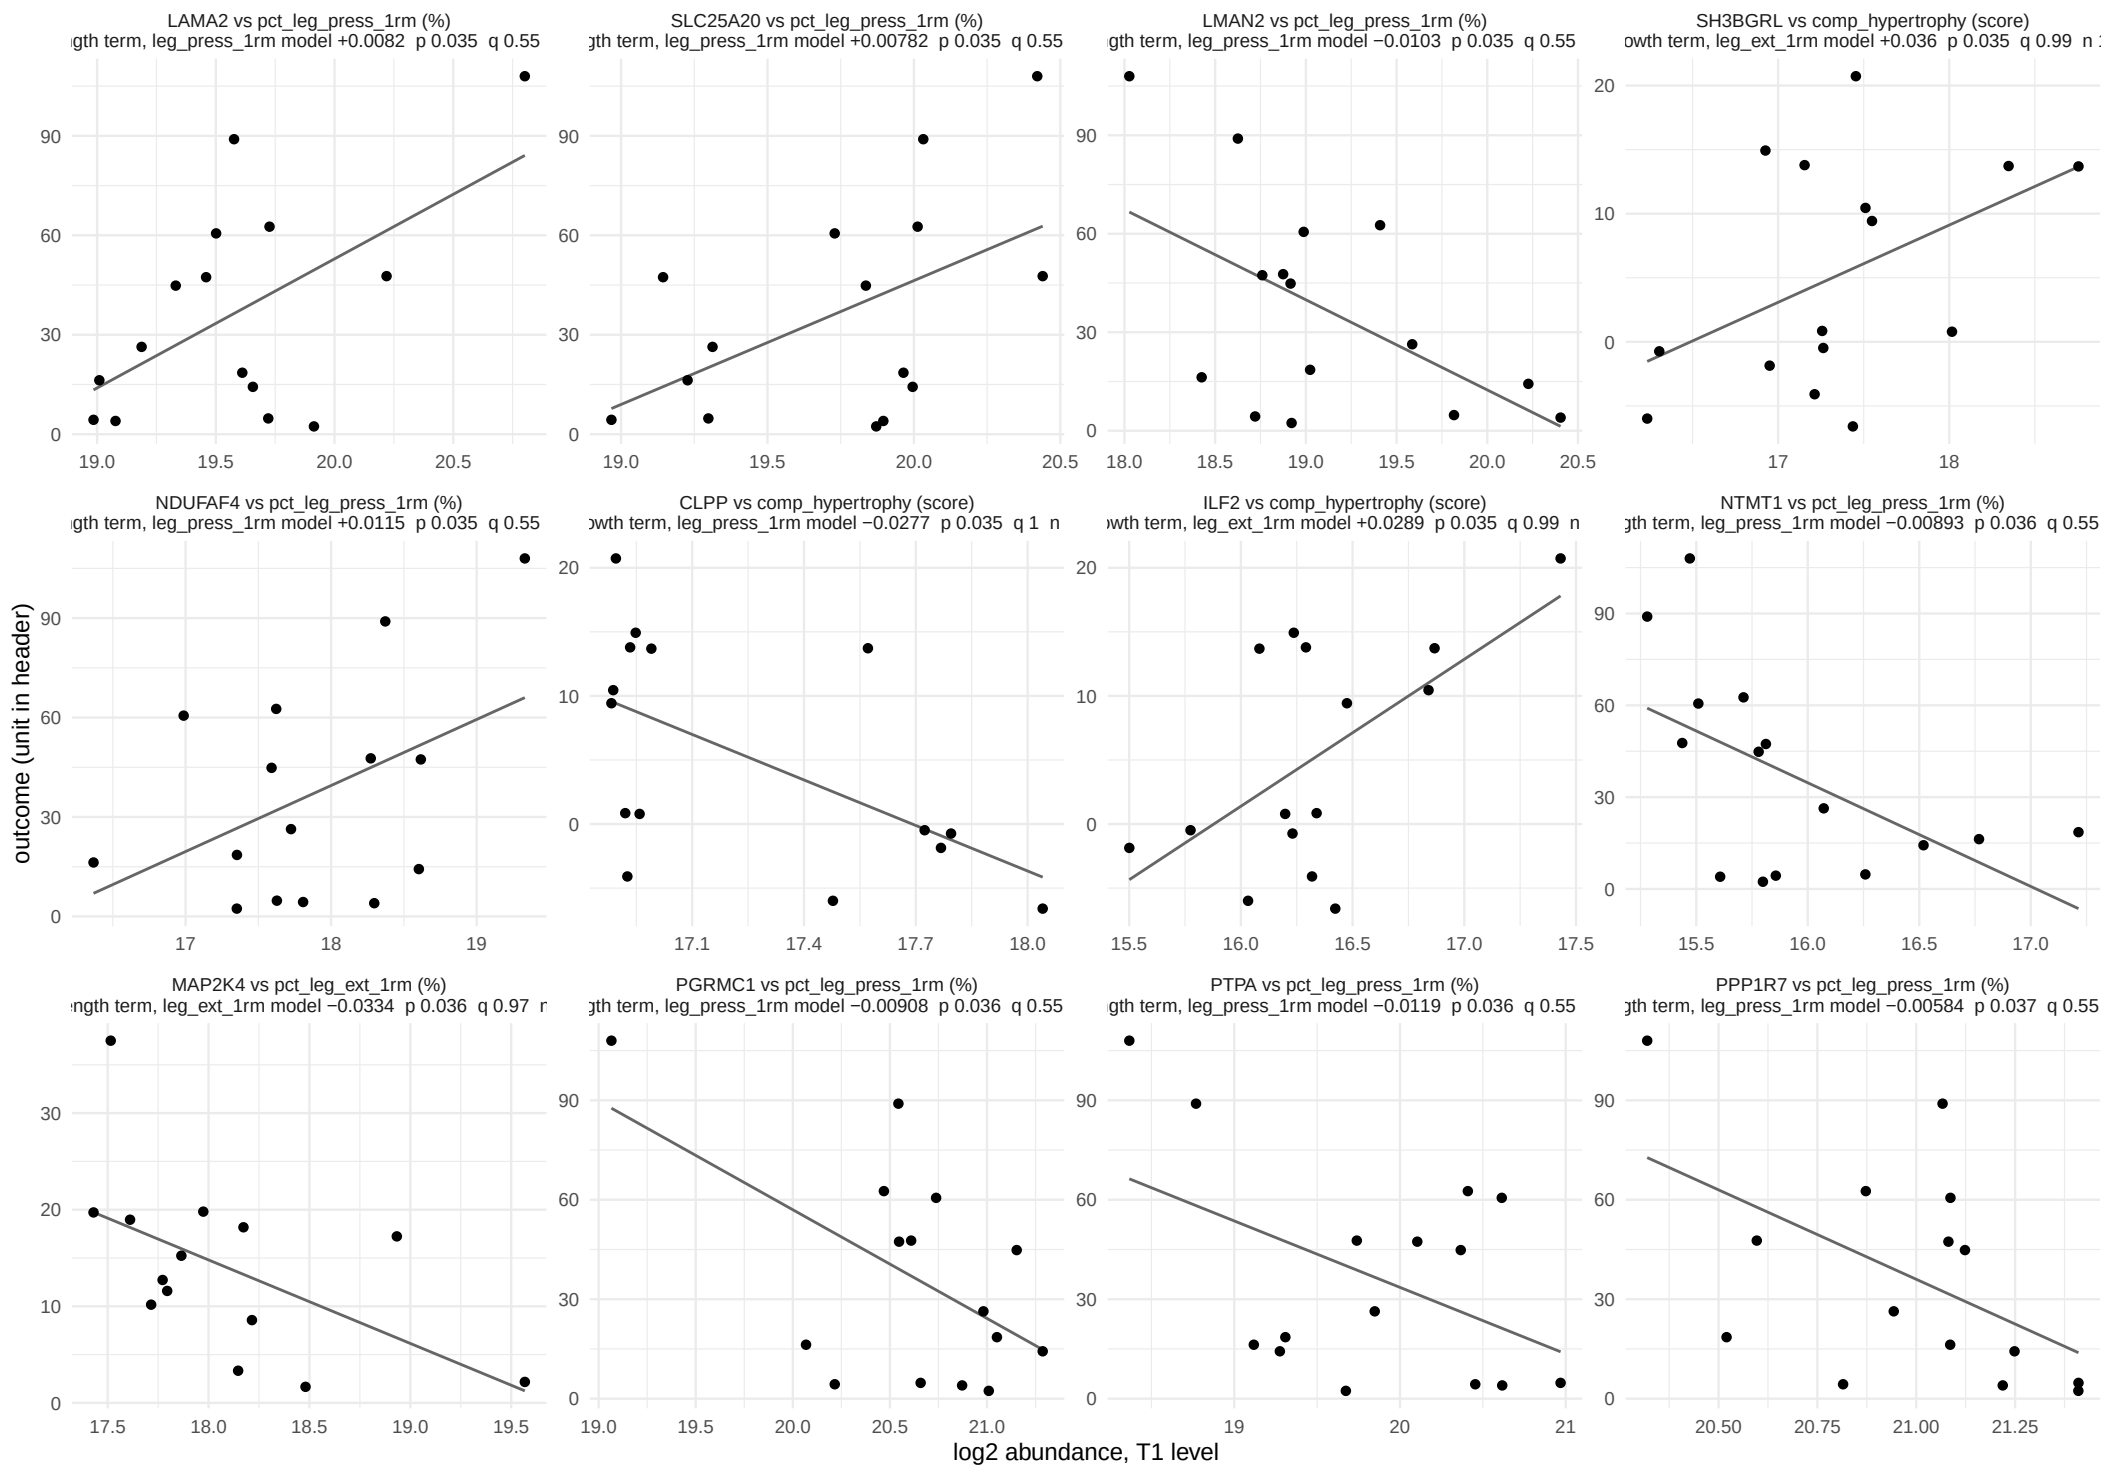

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/01_proteins.xlsx, two_predictor.

Two predictor, baseline window


391 of 7600 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 26 of 33.

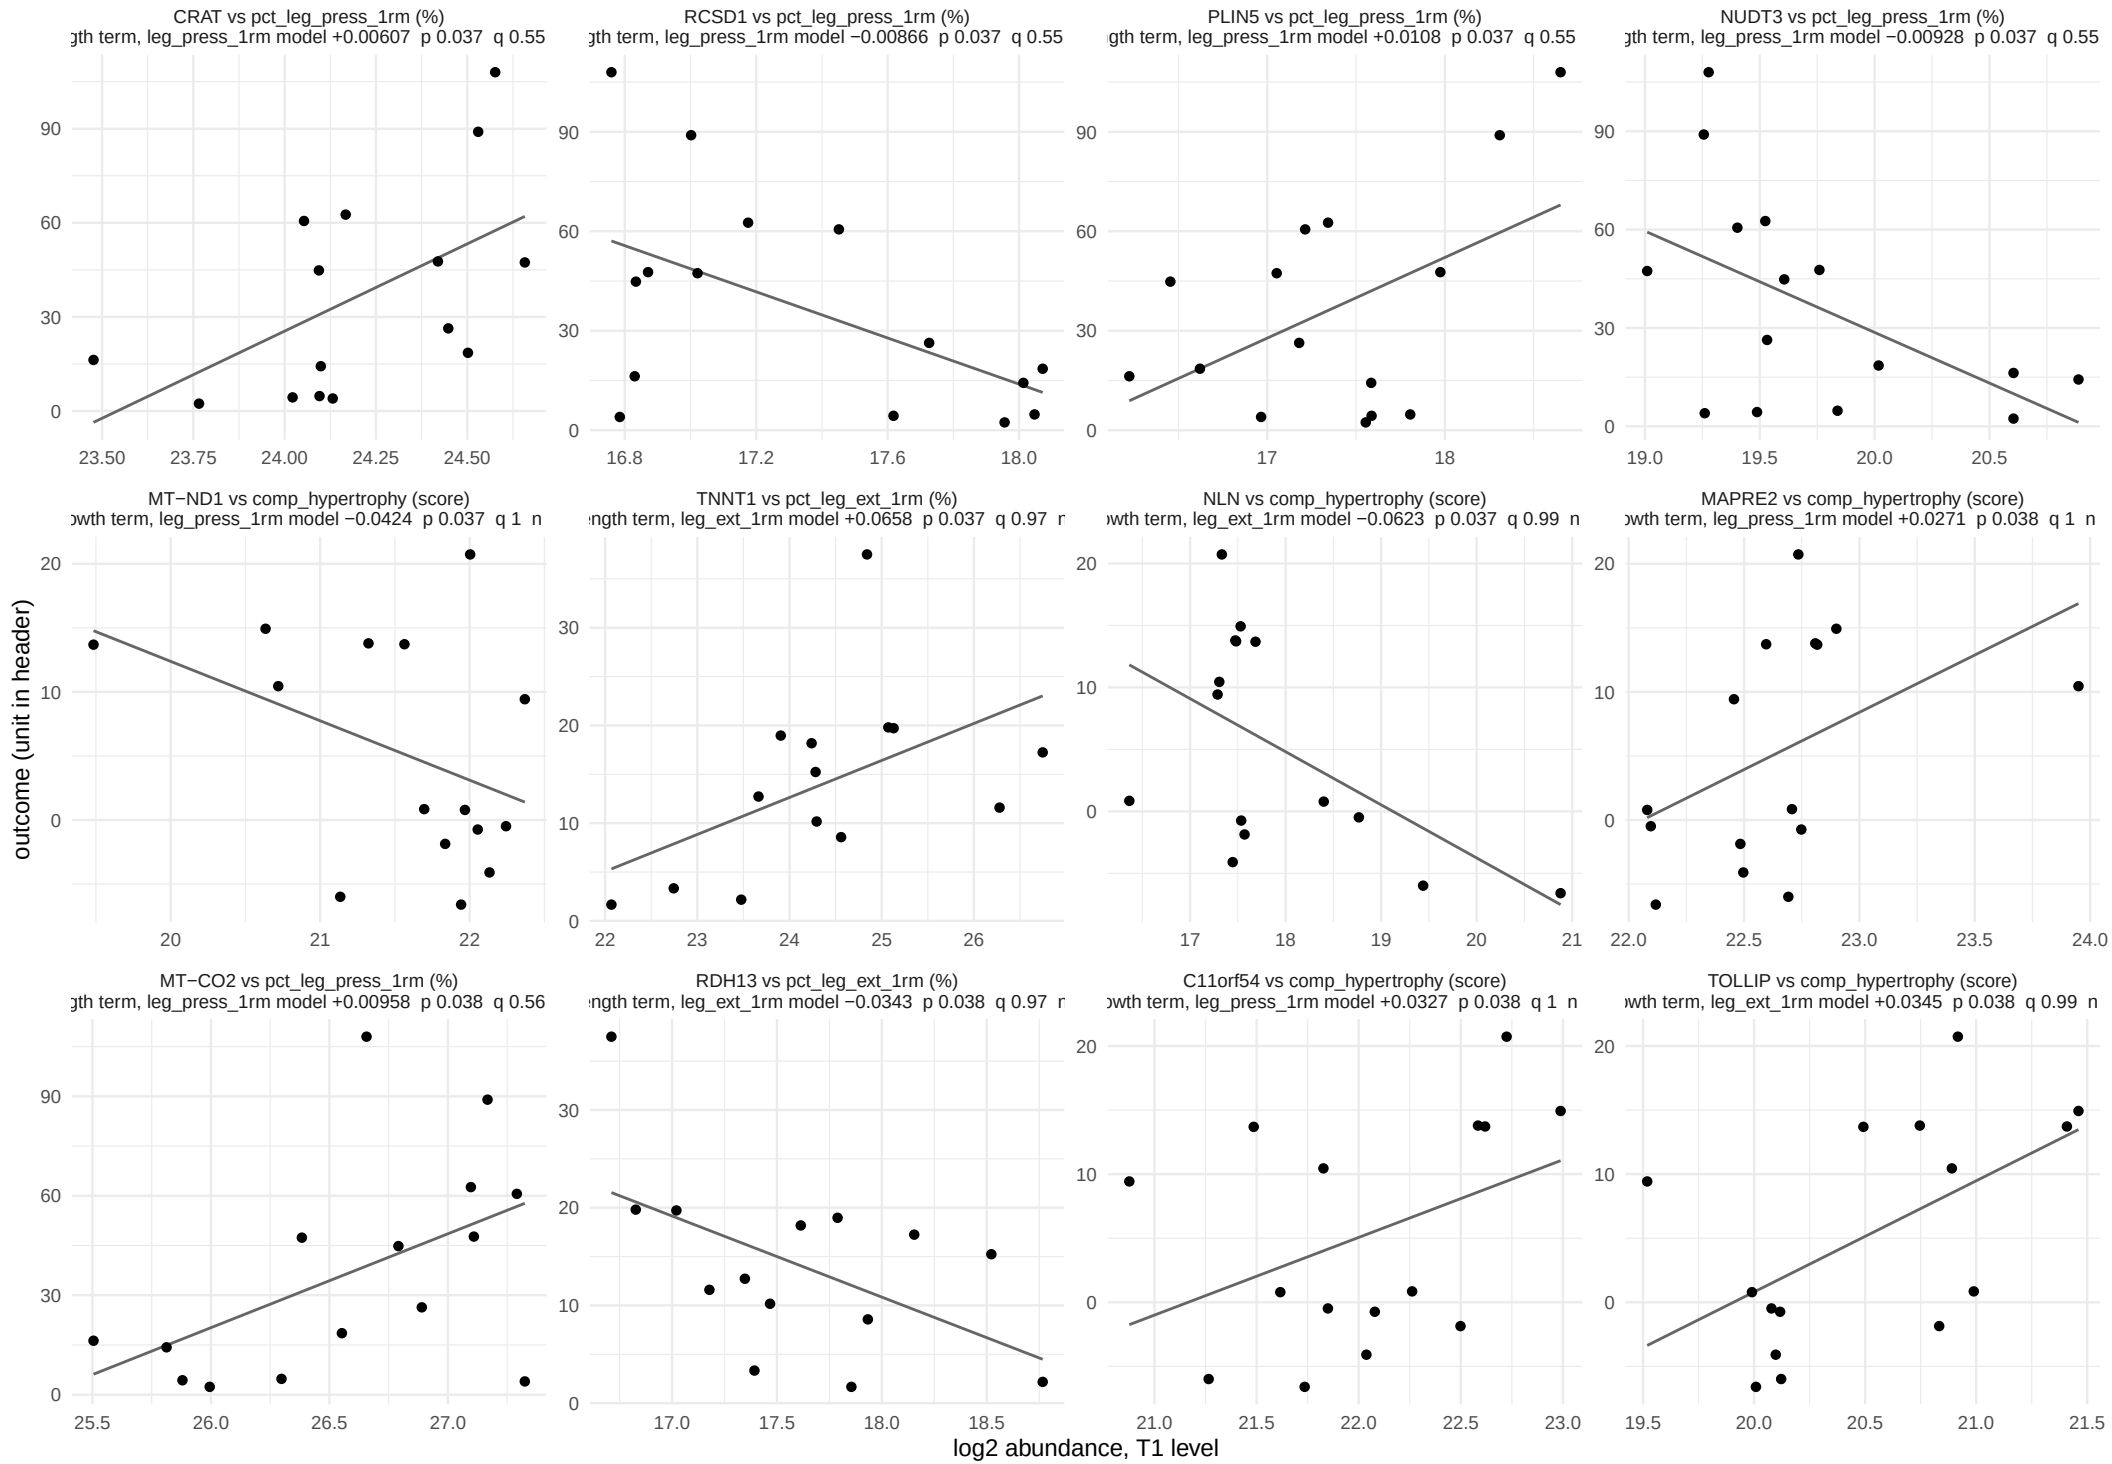

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/01_proteins.xlsx, two_predictor.

Two predictor, baseline window


391 of 7600 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 27 of 33.

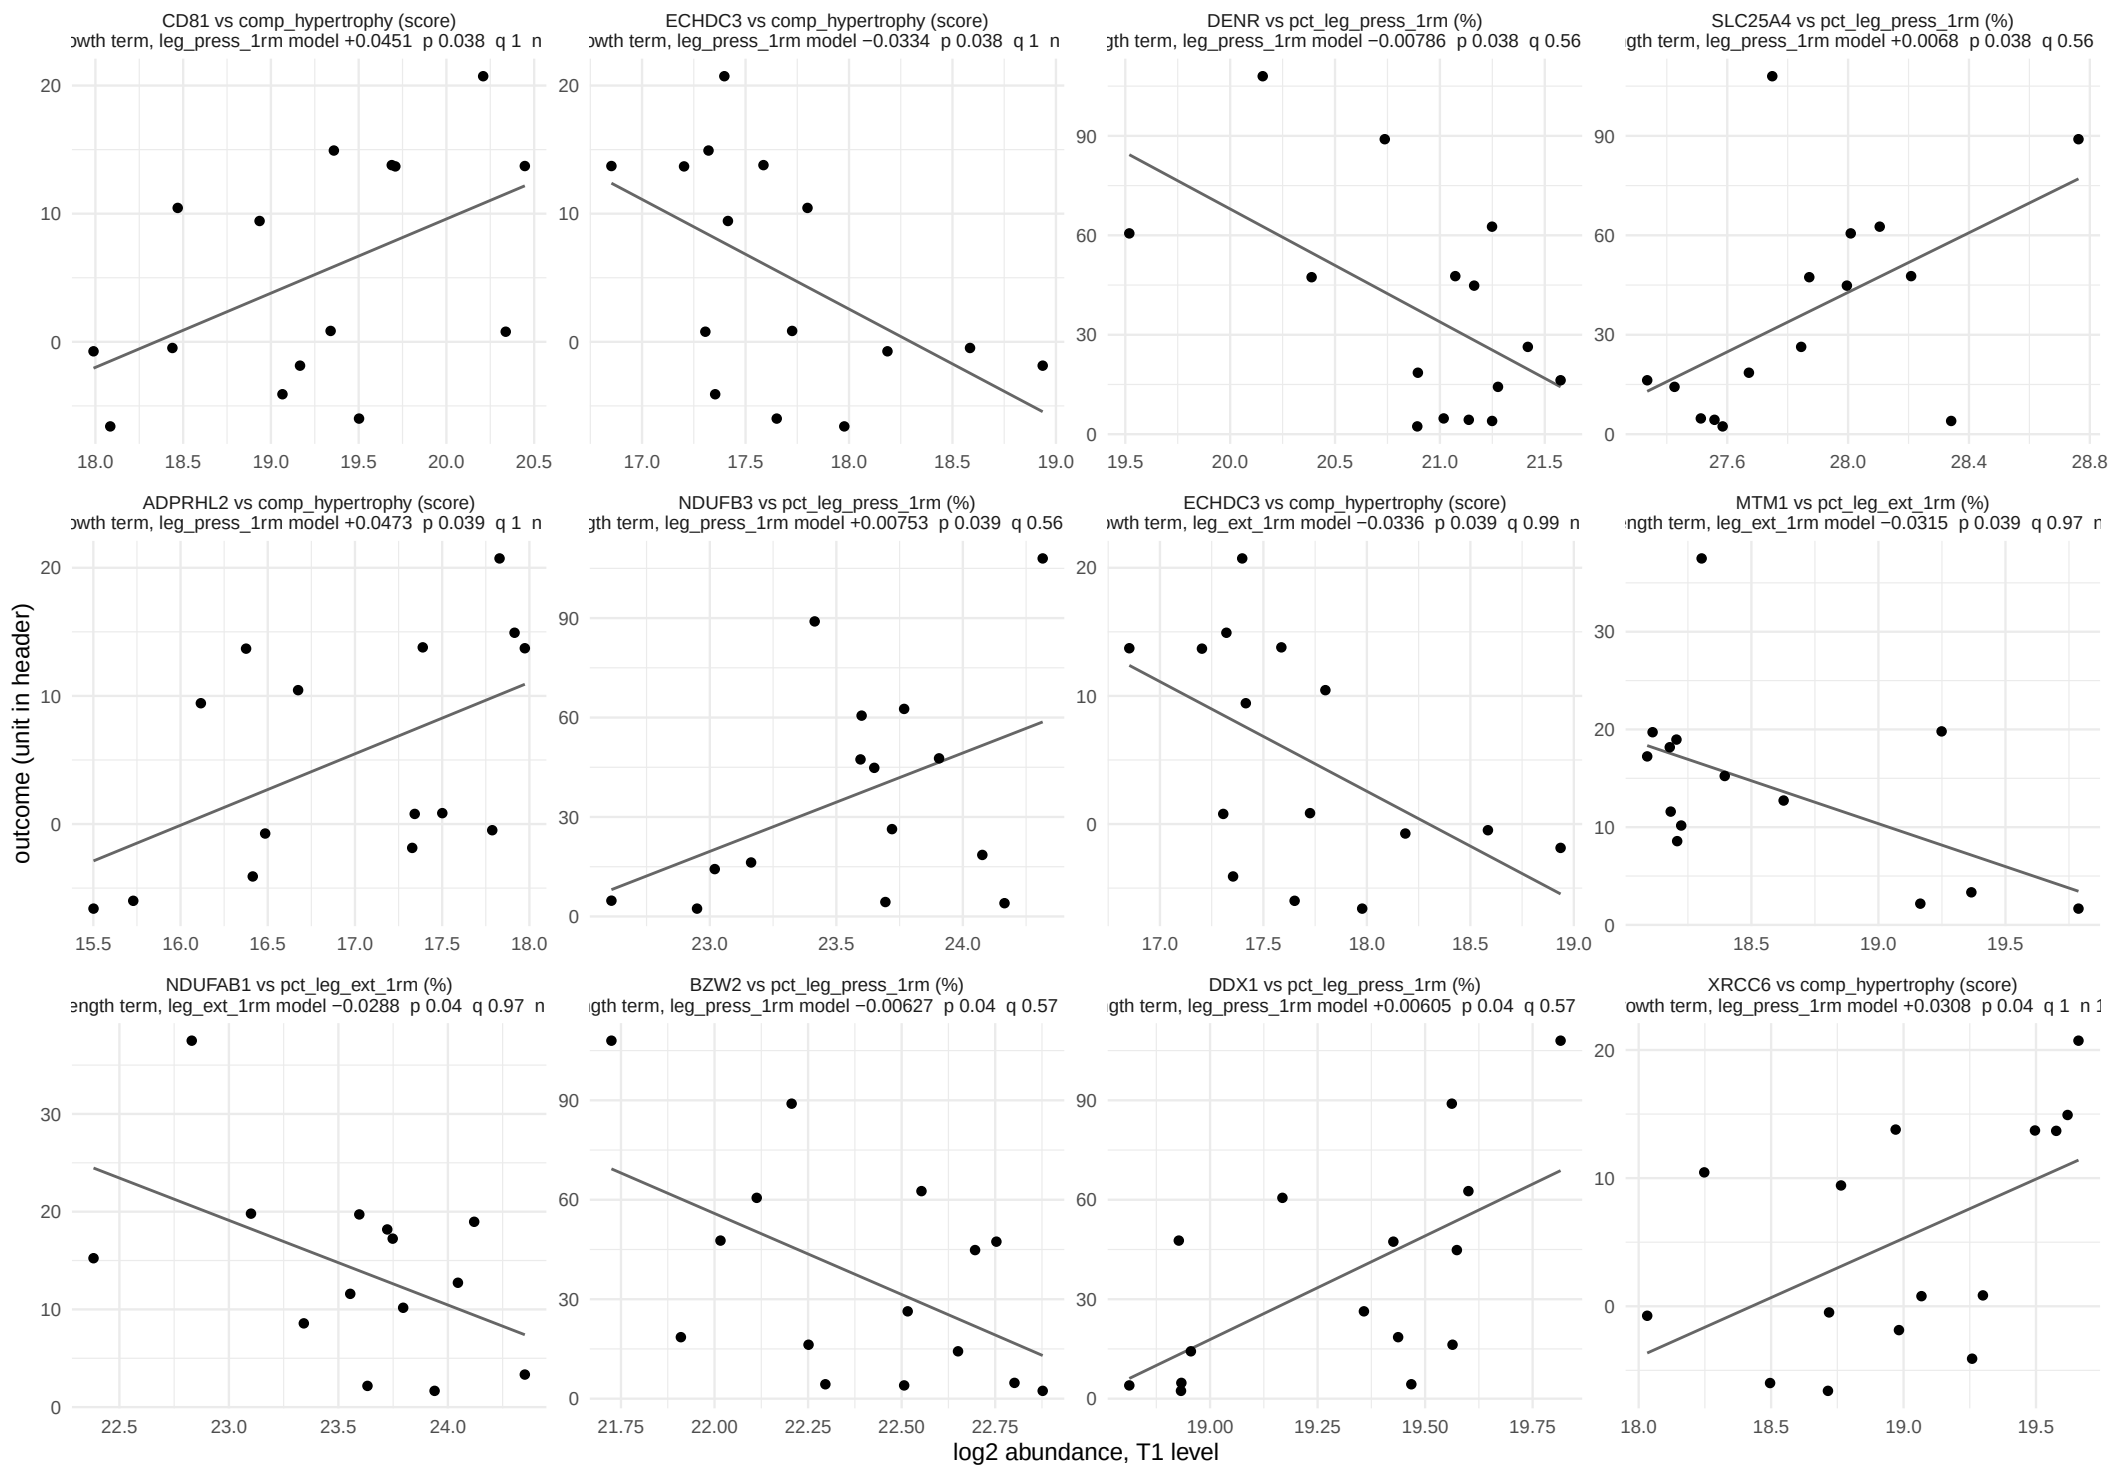

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/01_proteins.xlsx, two_predictor.

Two predictor, baseline window


391 of 7600 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 28 of 33.

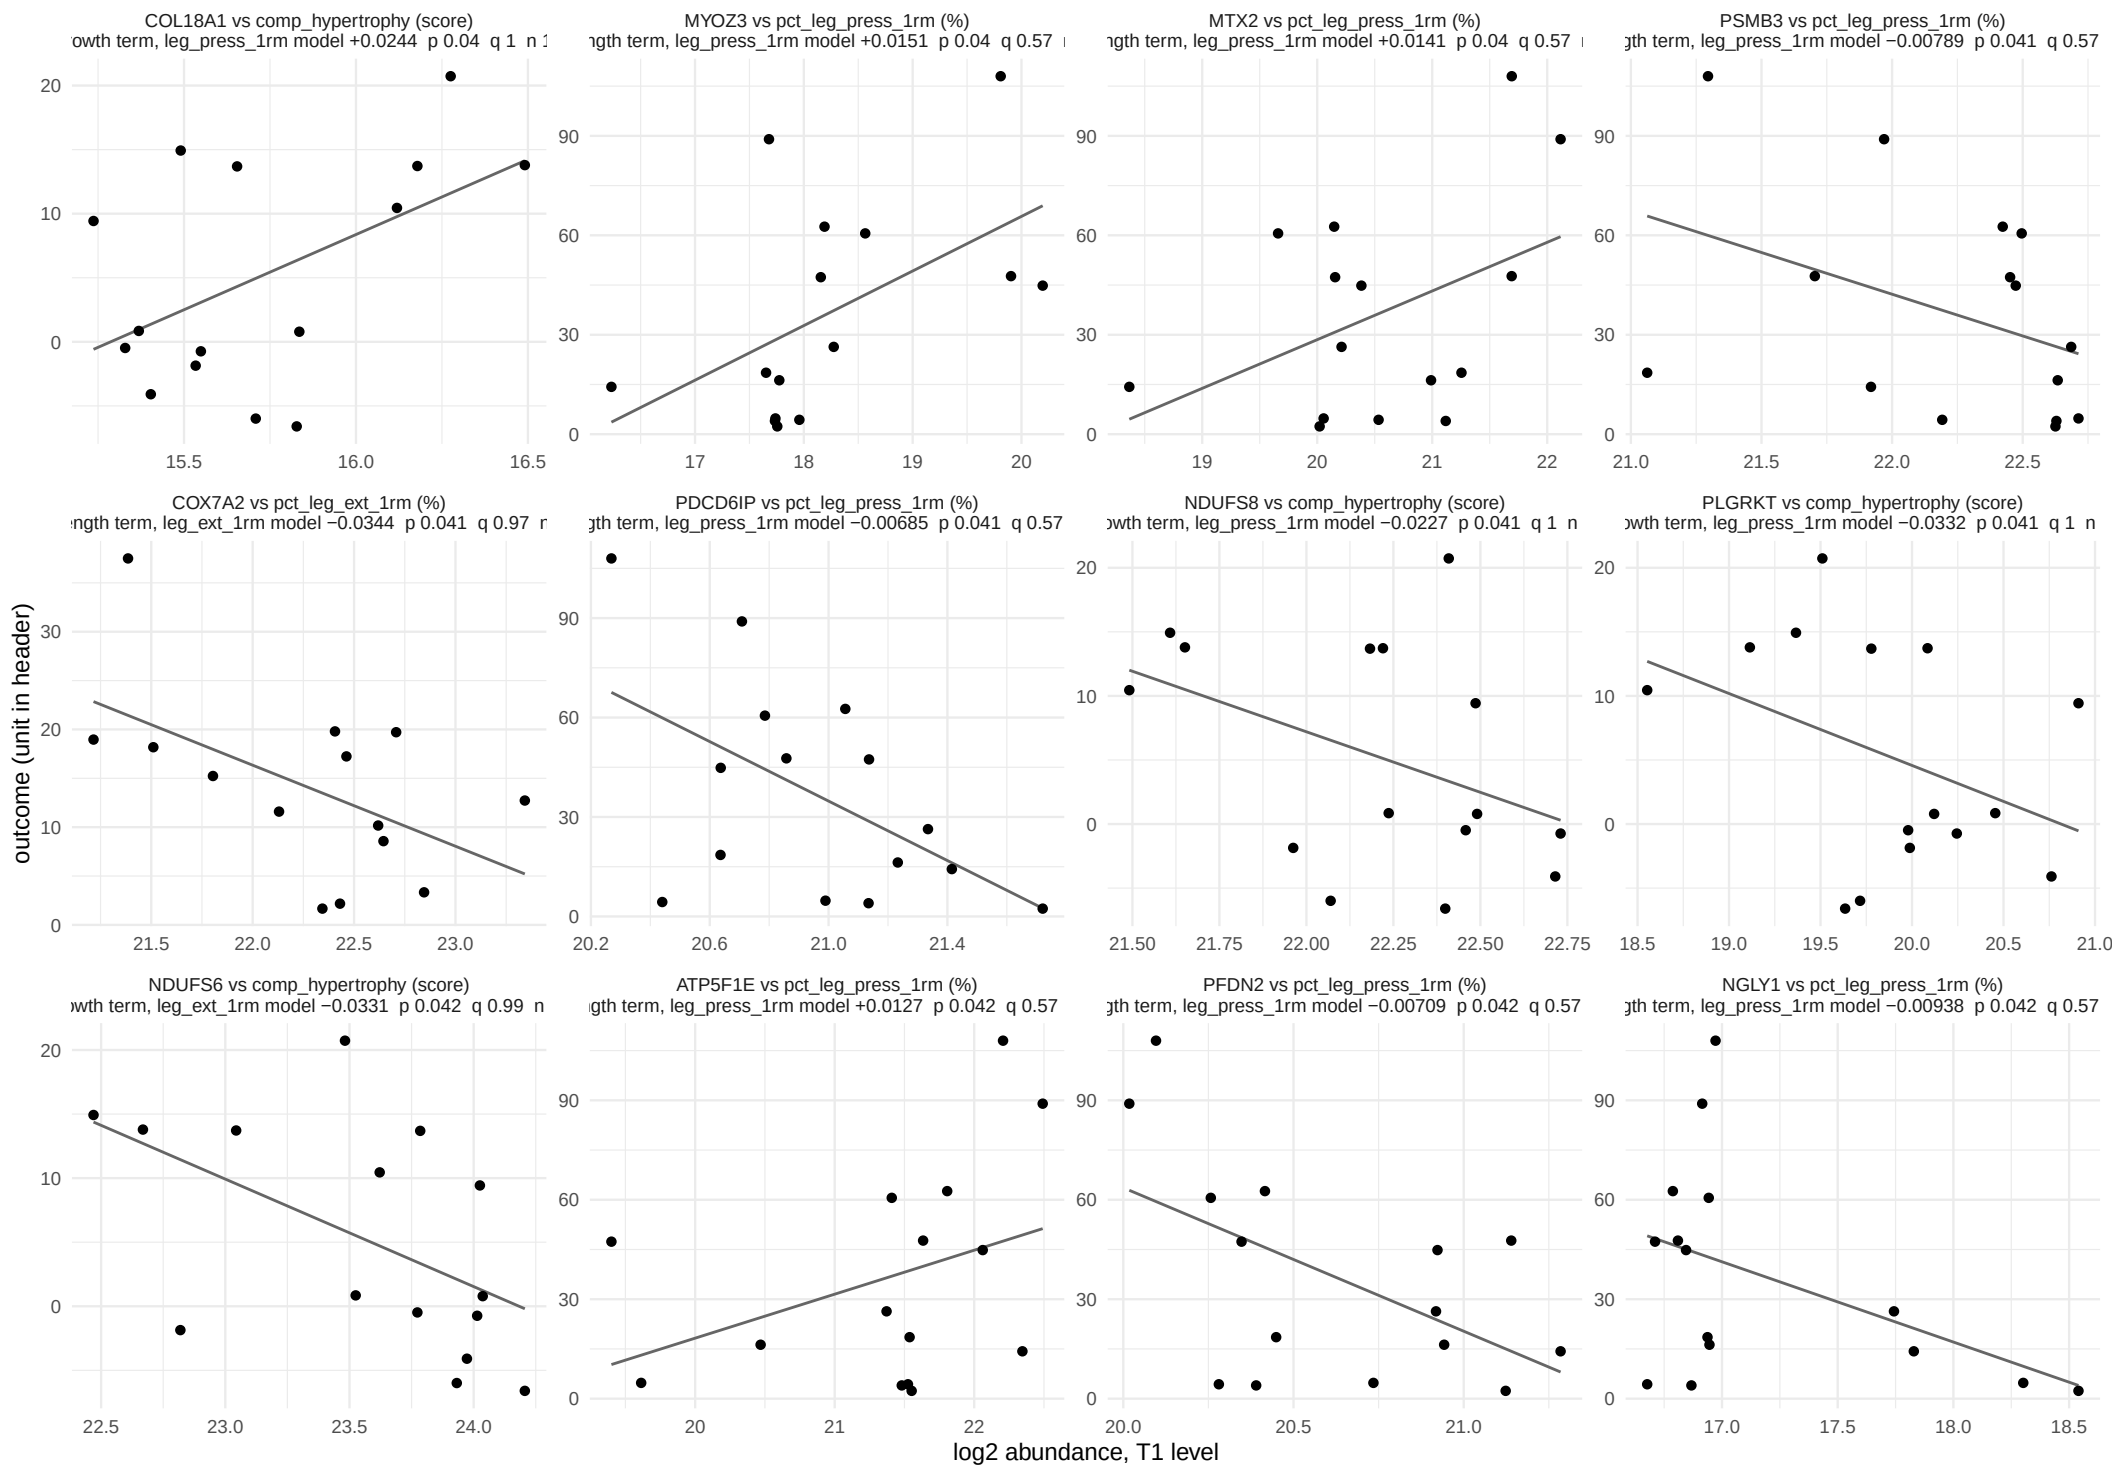

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/01_proteins.xlsx, two_predictor.

Two predictor, baseline window


391 of 7600 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 29 of 33.

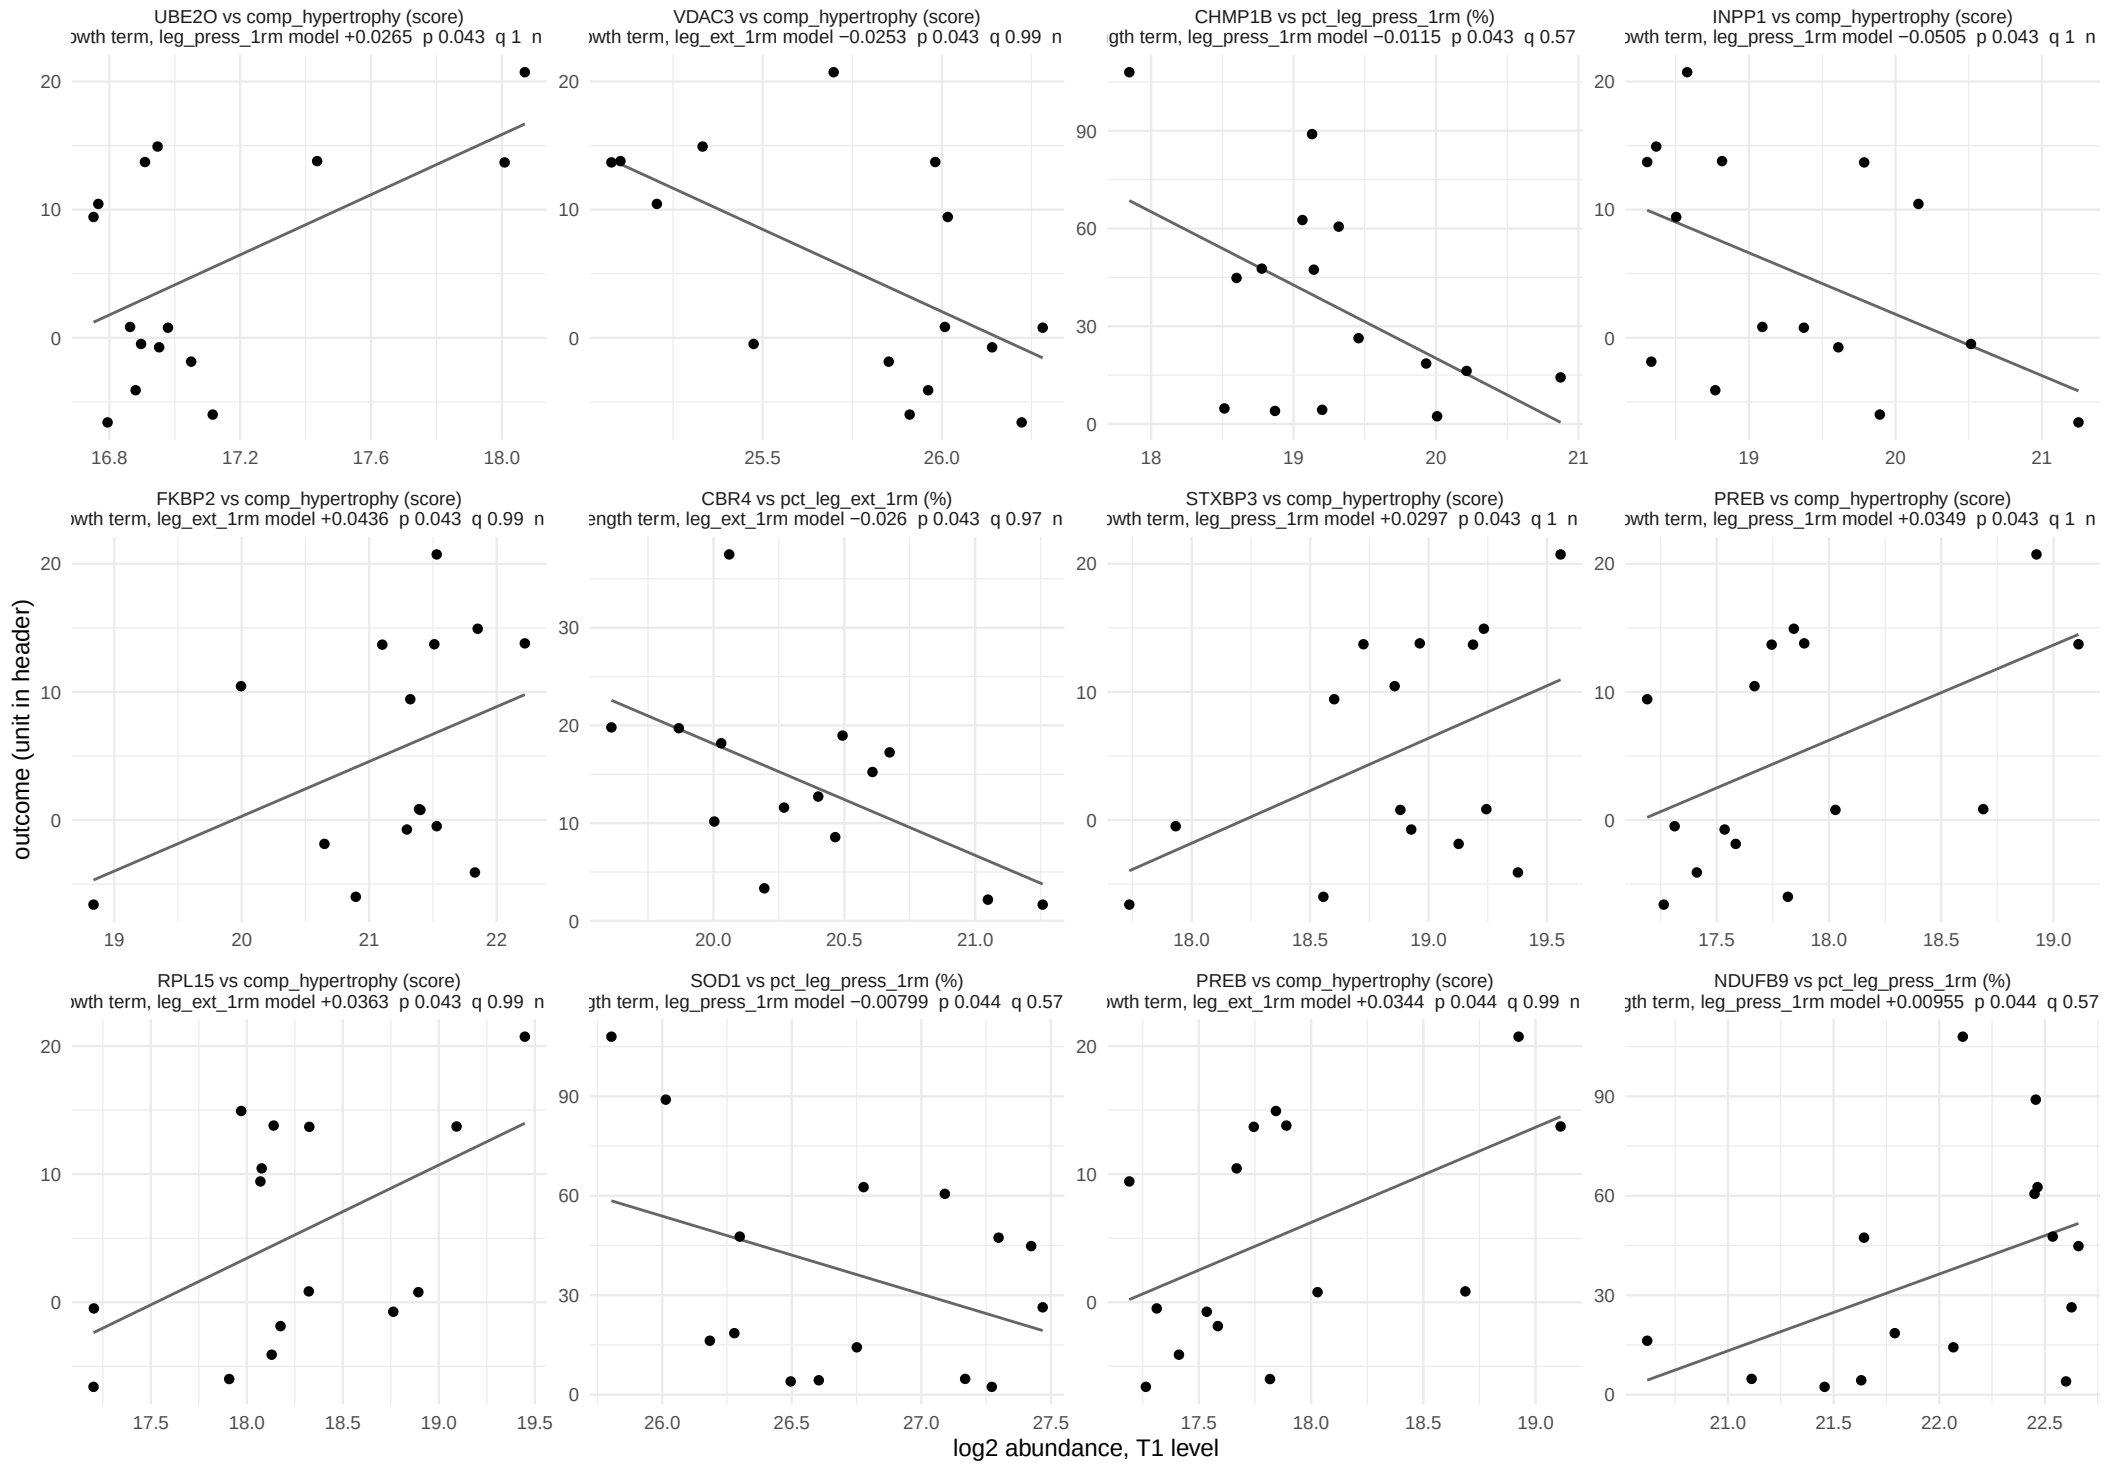

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/01_proteins.xlsx, two_predictor.

Two predictor, baseline window


391 of 7600 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 30 of 33.

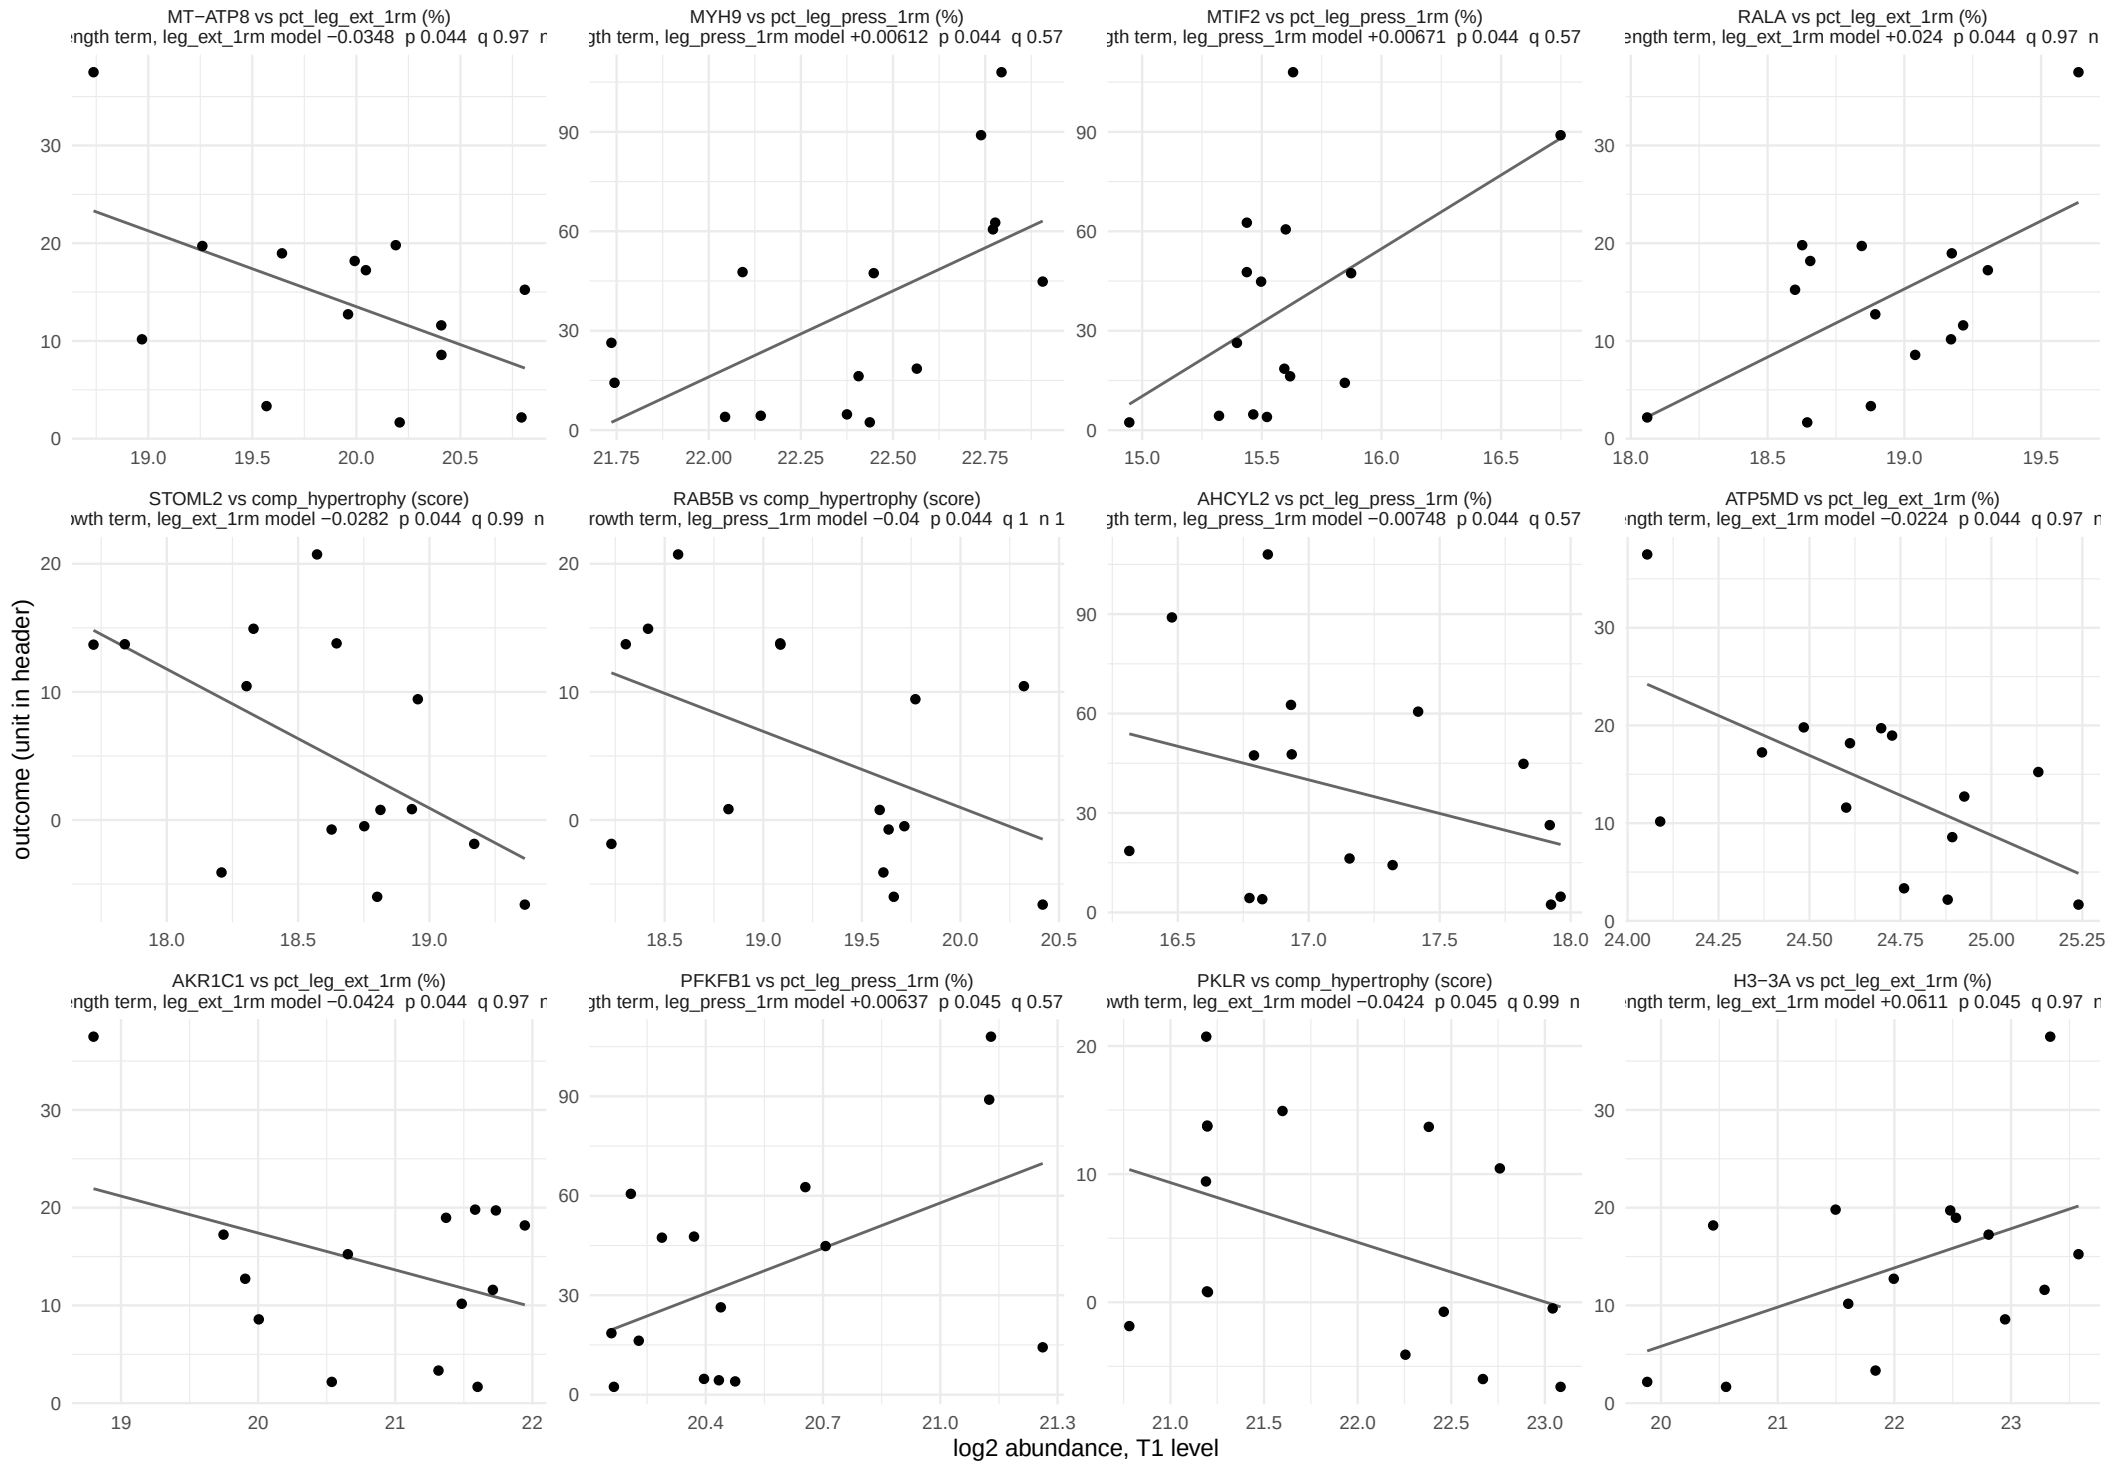

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/01_proteins.xlsx, two_predictor.

Two predictor, baseline window


391 of 7600 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 31 of 33.

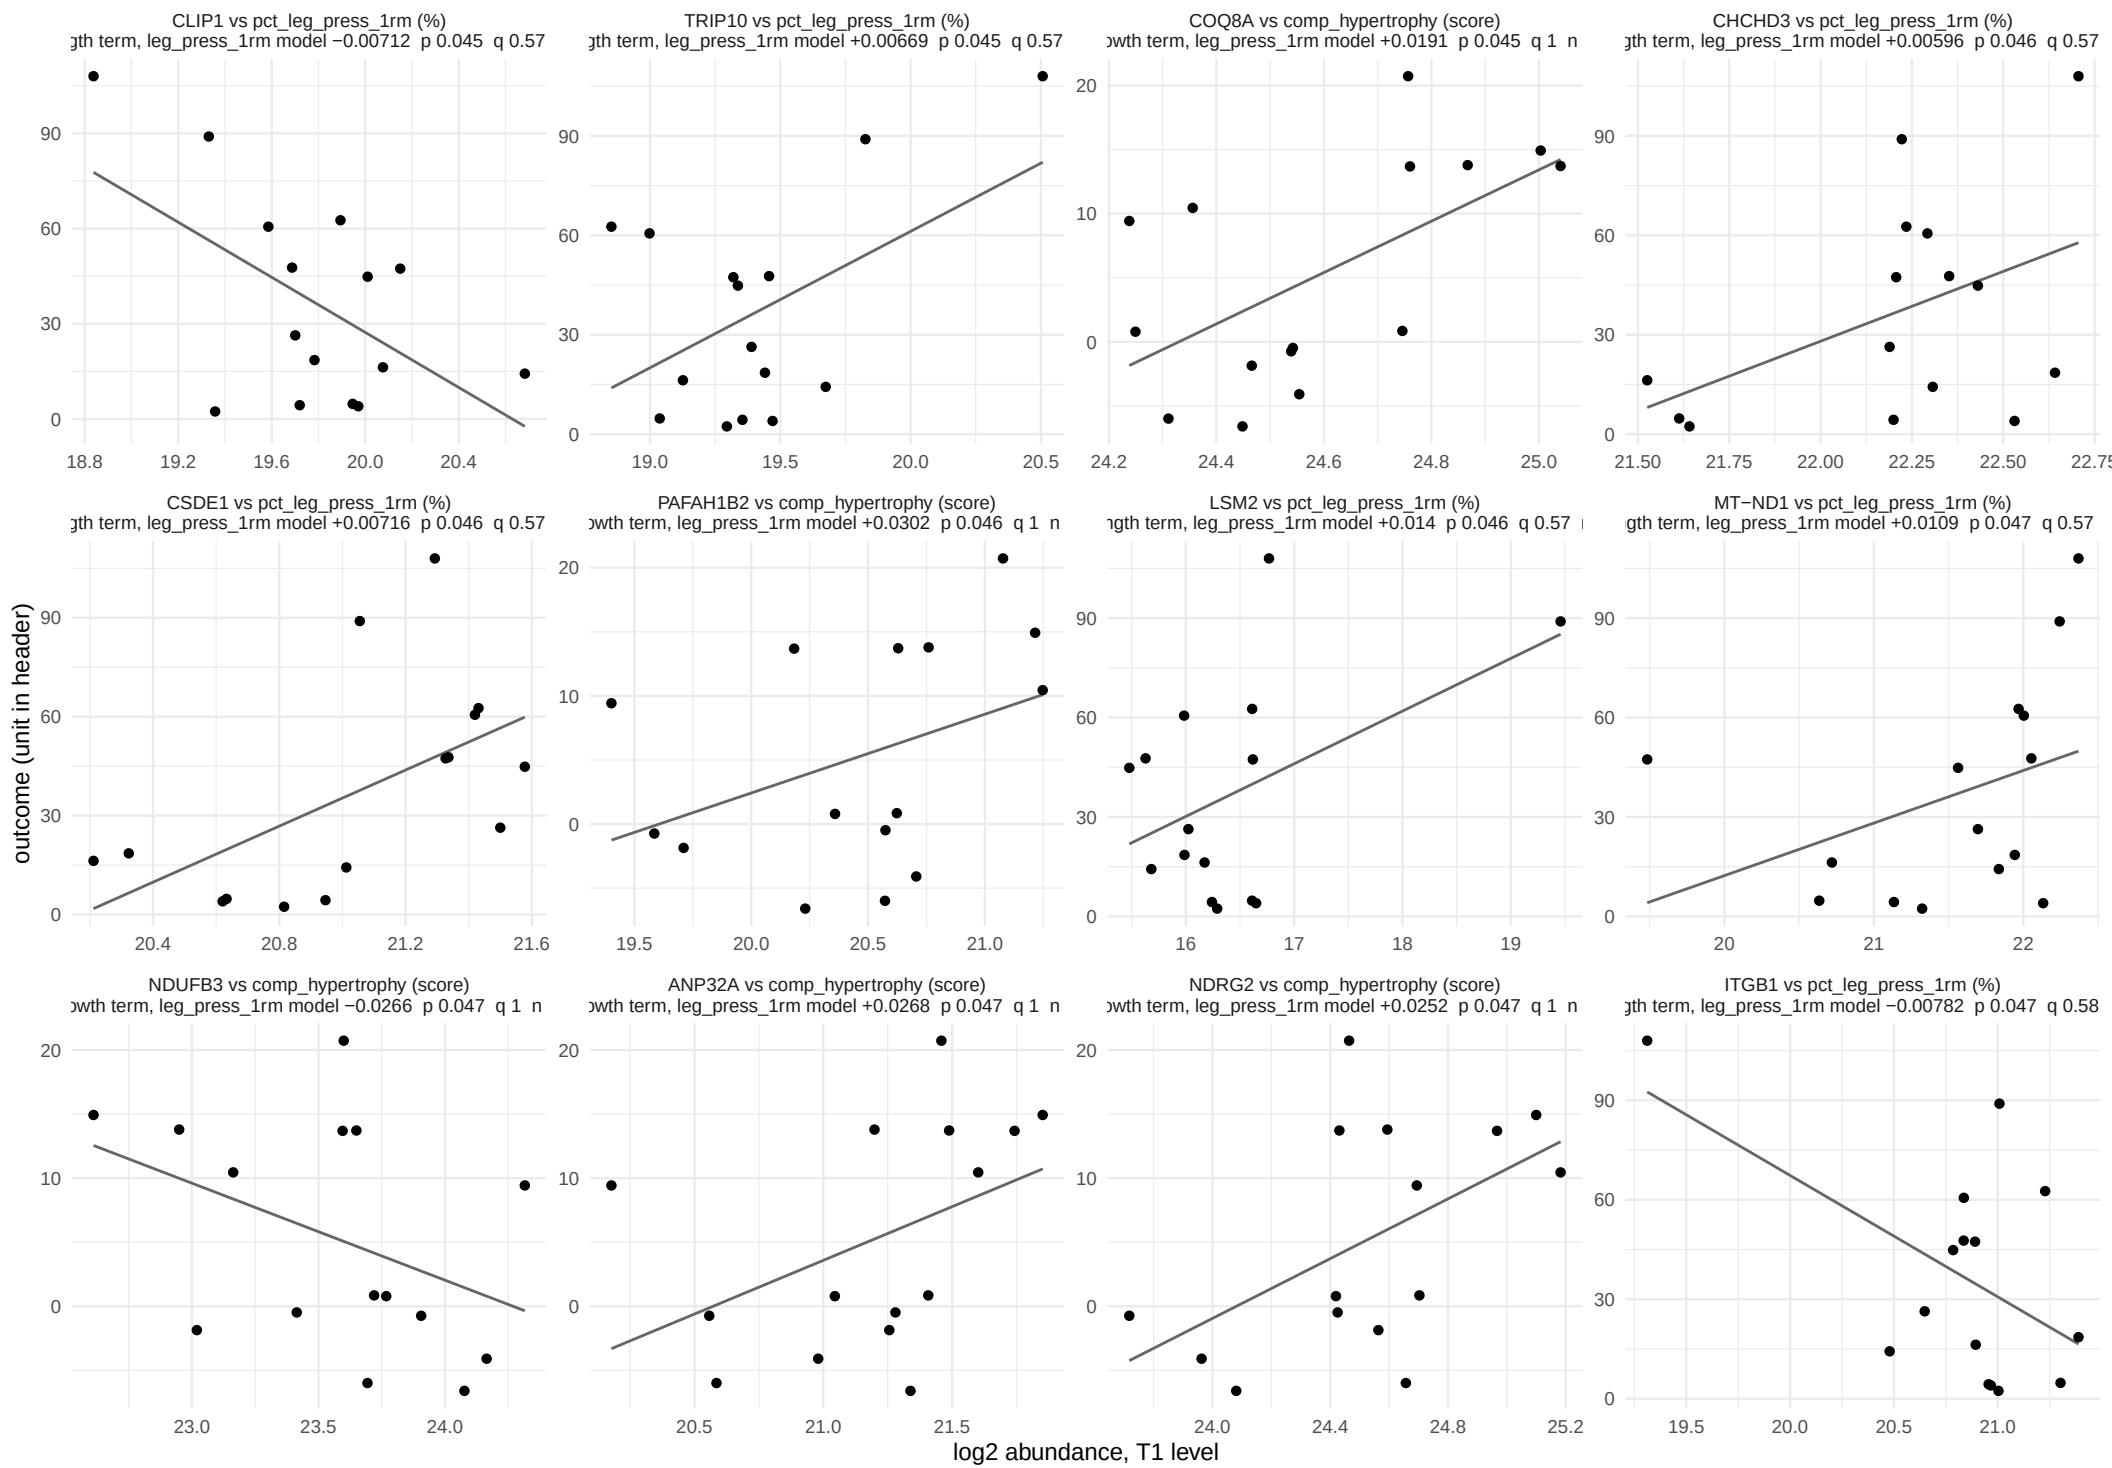

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/01_proteins.xlsx, two_predictor.

Two predictor, baseline window


391 of 7600 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 32 of 33.

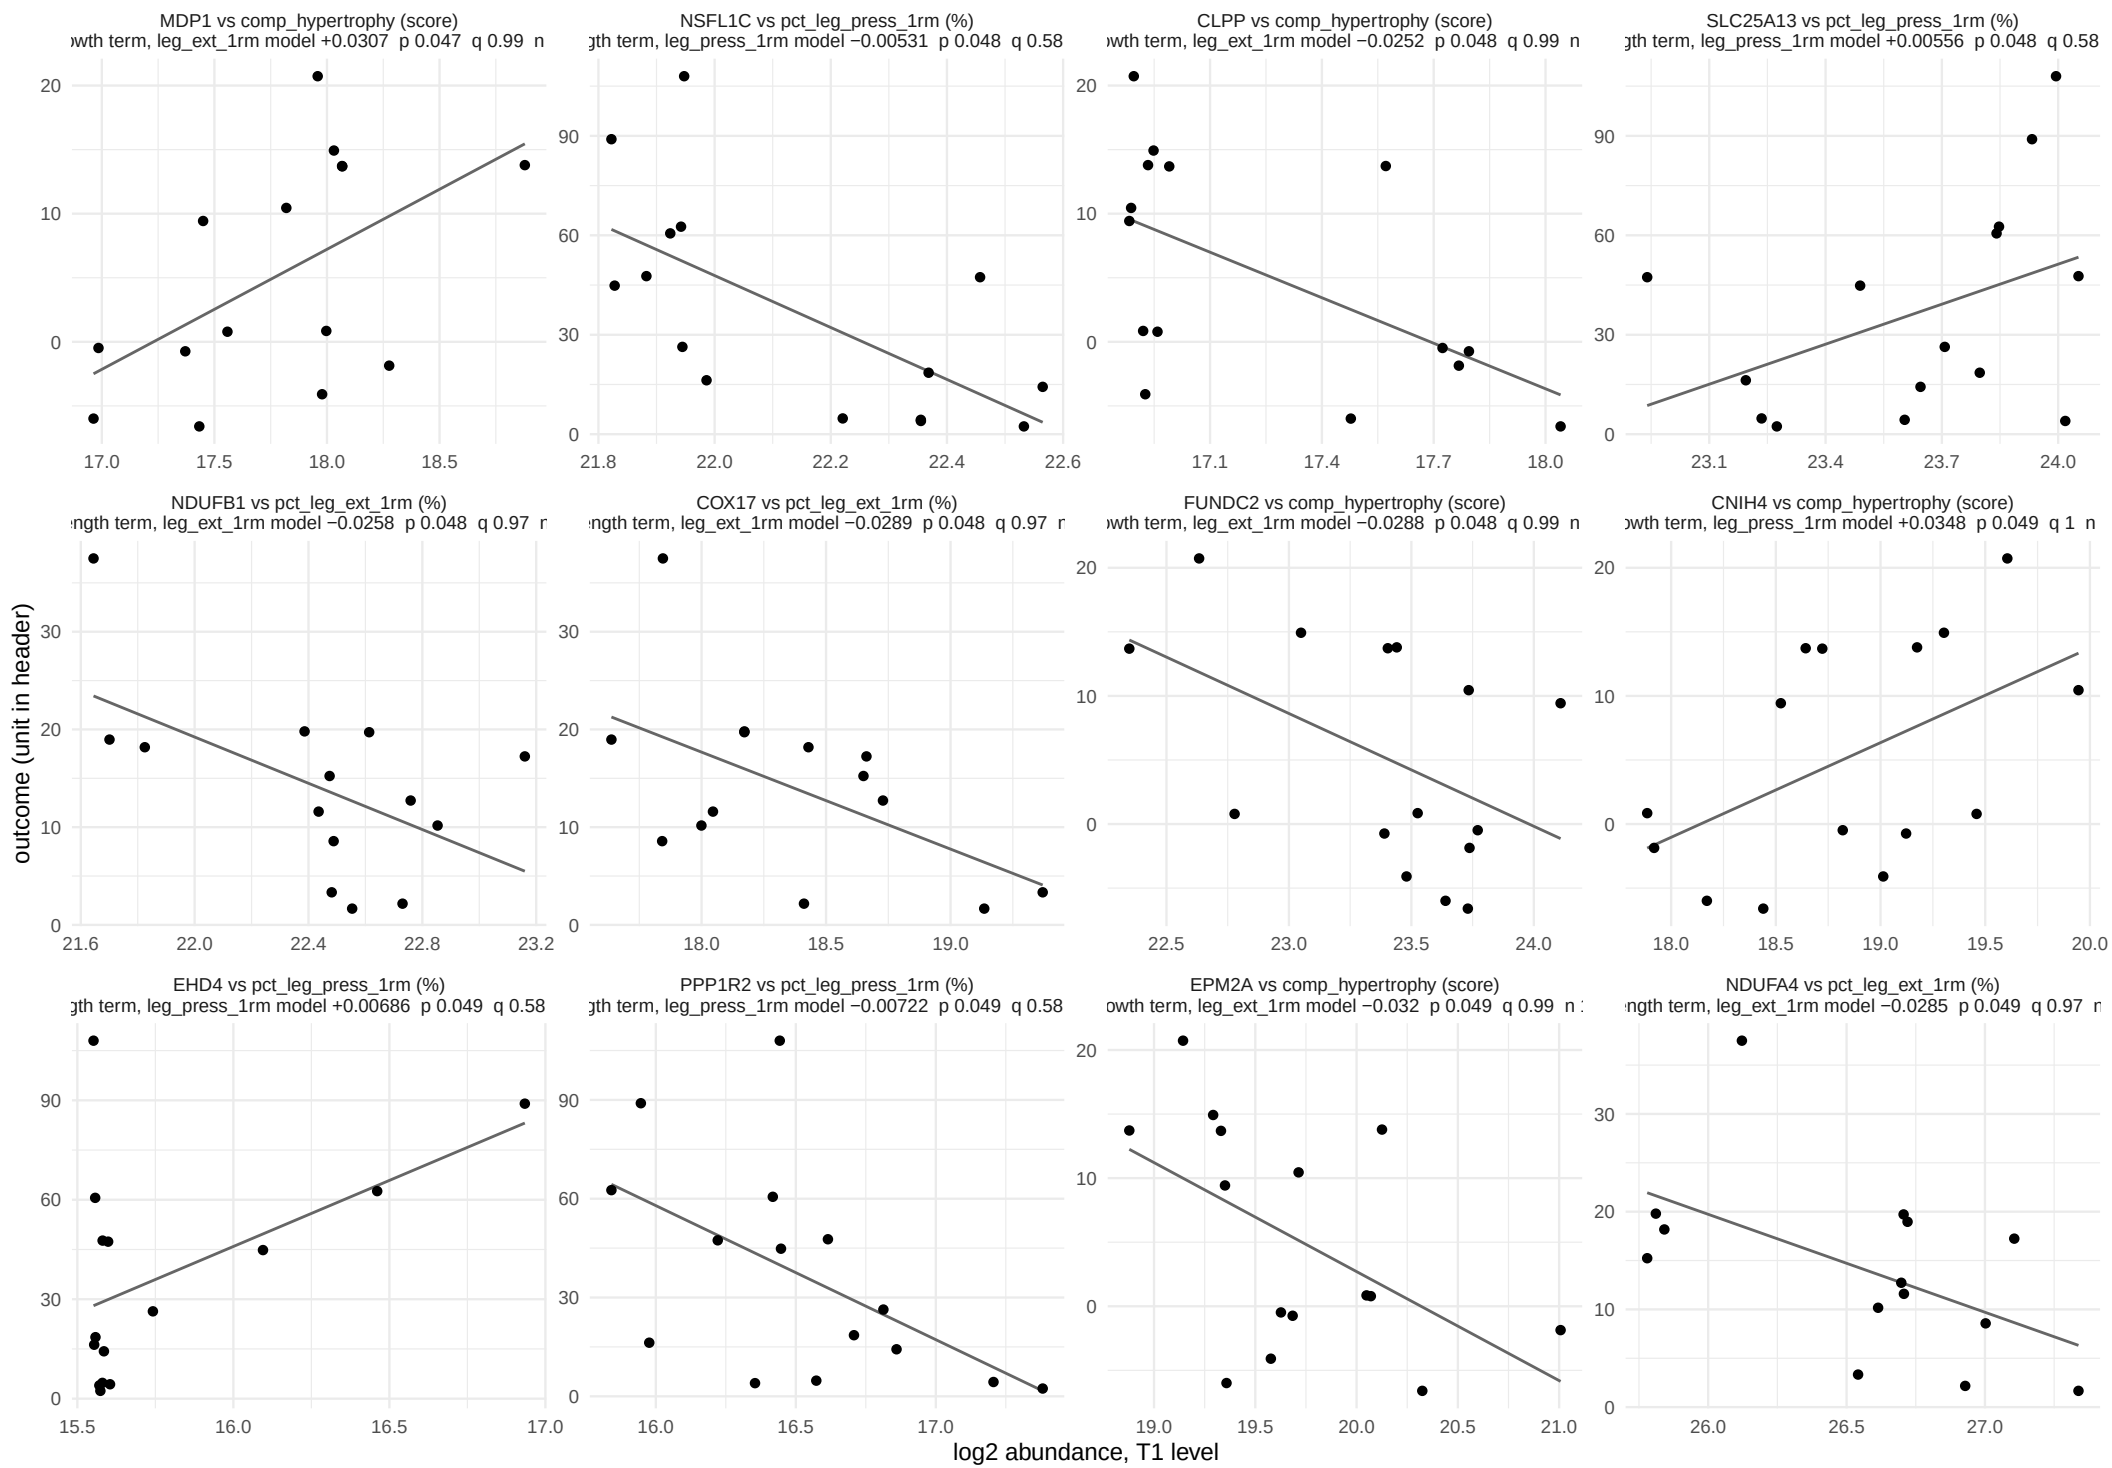

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/01_proteins.xlsx, two_predictor.

Two predictor, baseline window


391 of 7600 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 33 of 33.

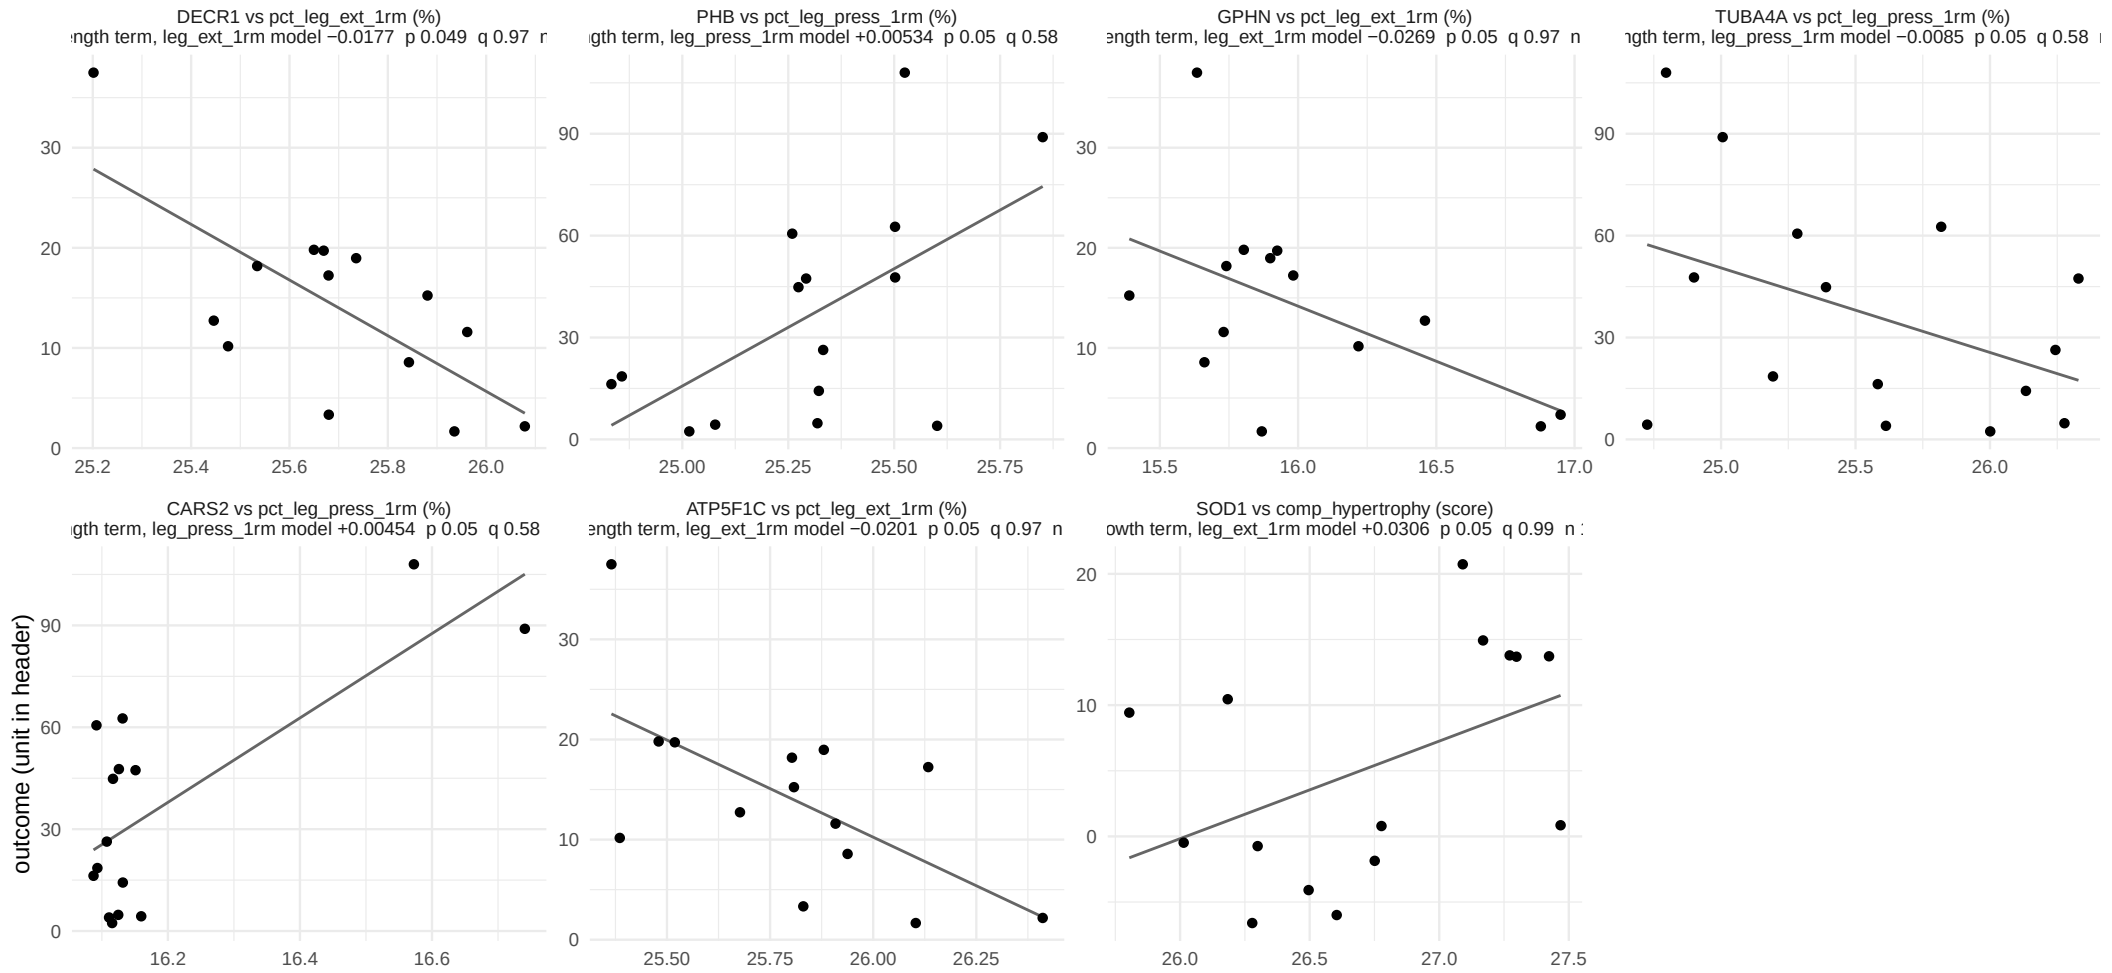

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/01_proteins.xlsx, two_predictor.

Two predictor, acute window


324 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 1 of 27.

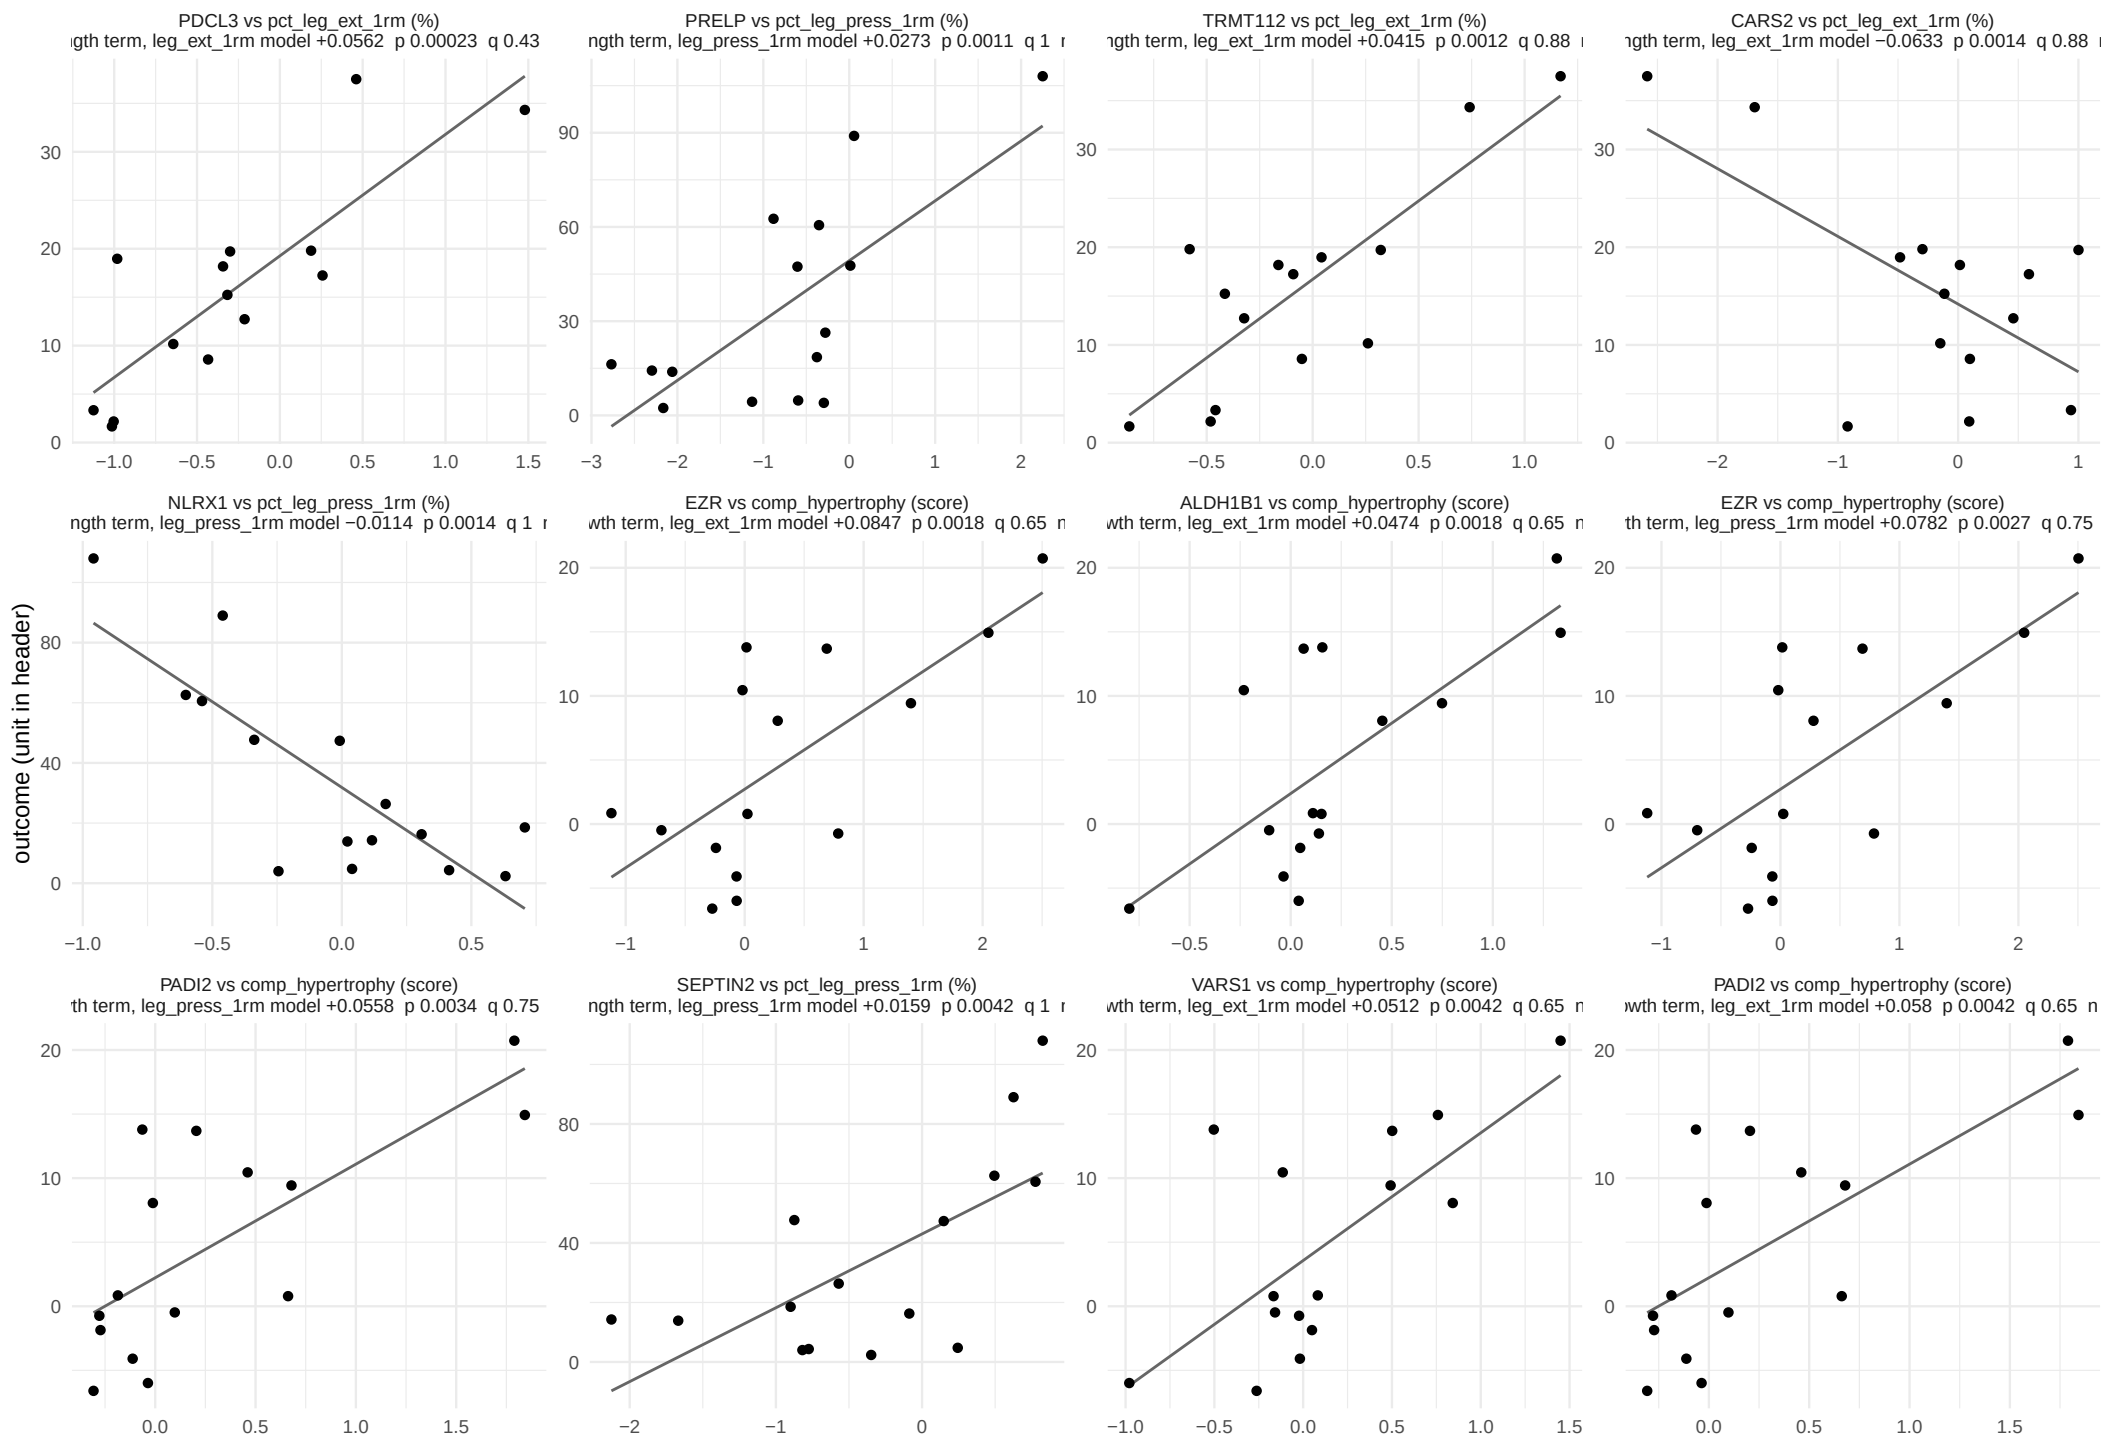

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/01_proteins.xlsx, two_predictor.

Two predictor, acute window


324 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 2 of 27.

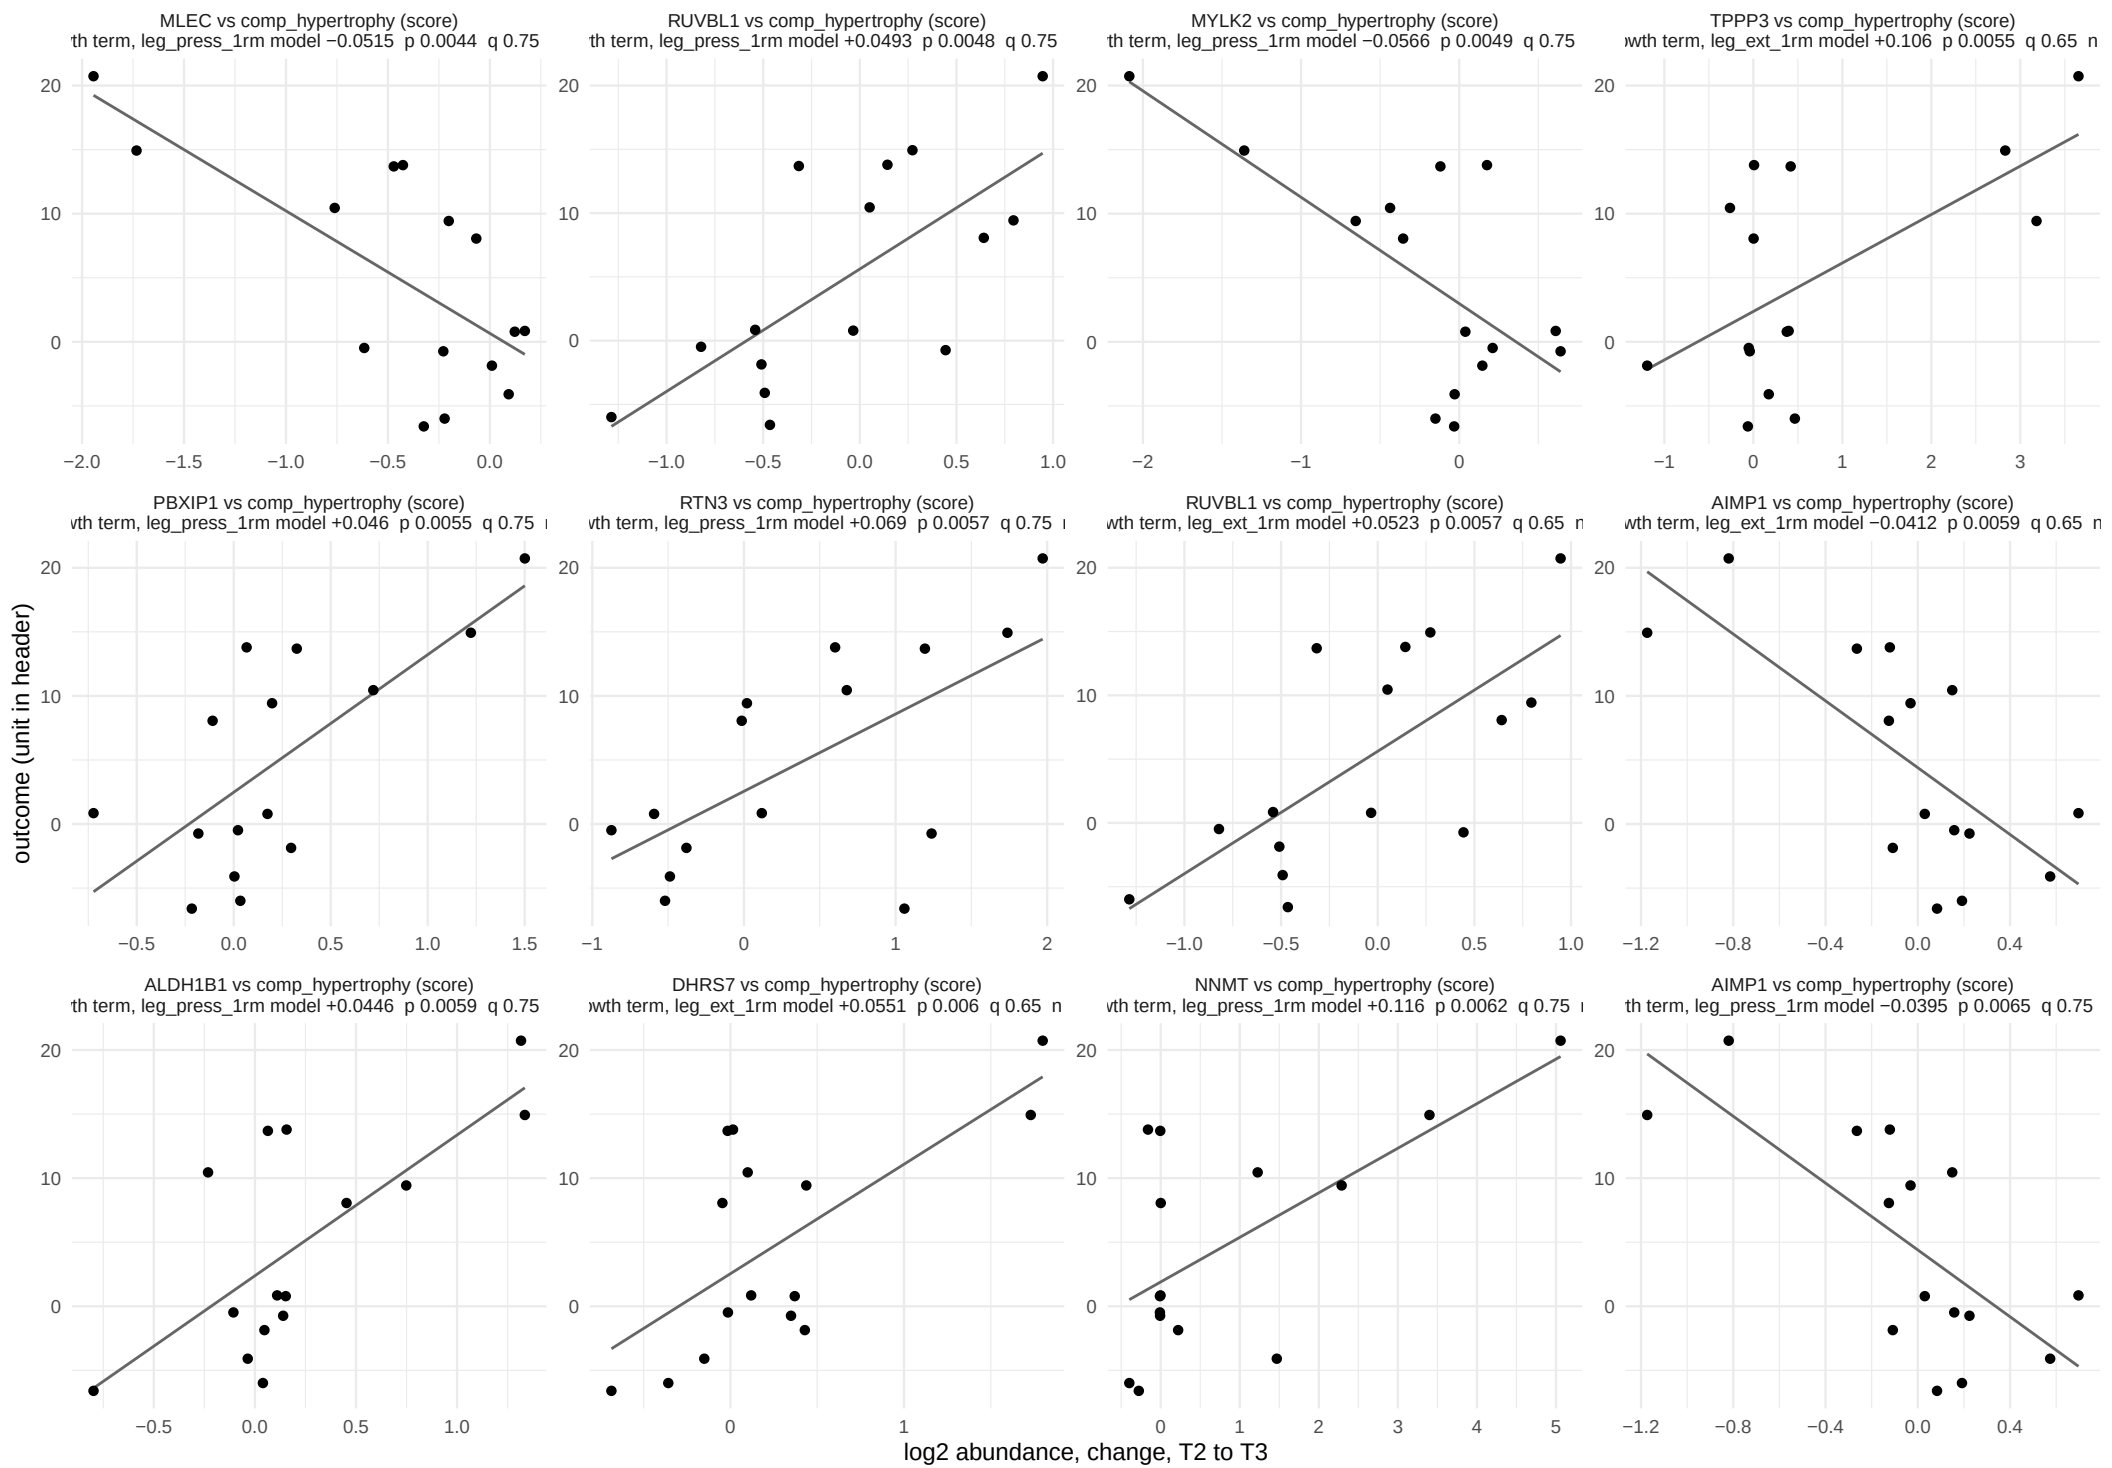

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/01_proteins.xlsx, two_predictor.

Two predictor, acute window


324 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 3 of 27.

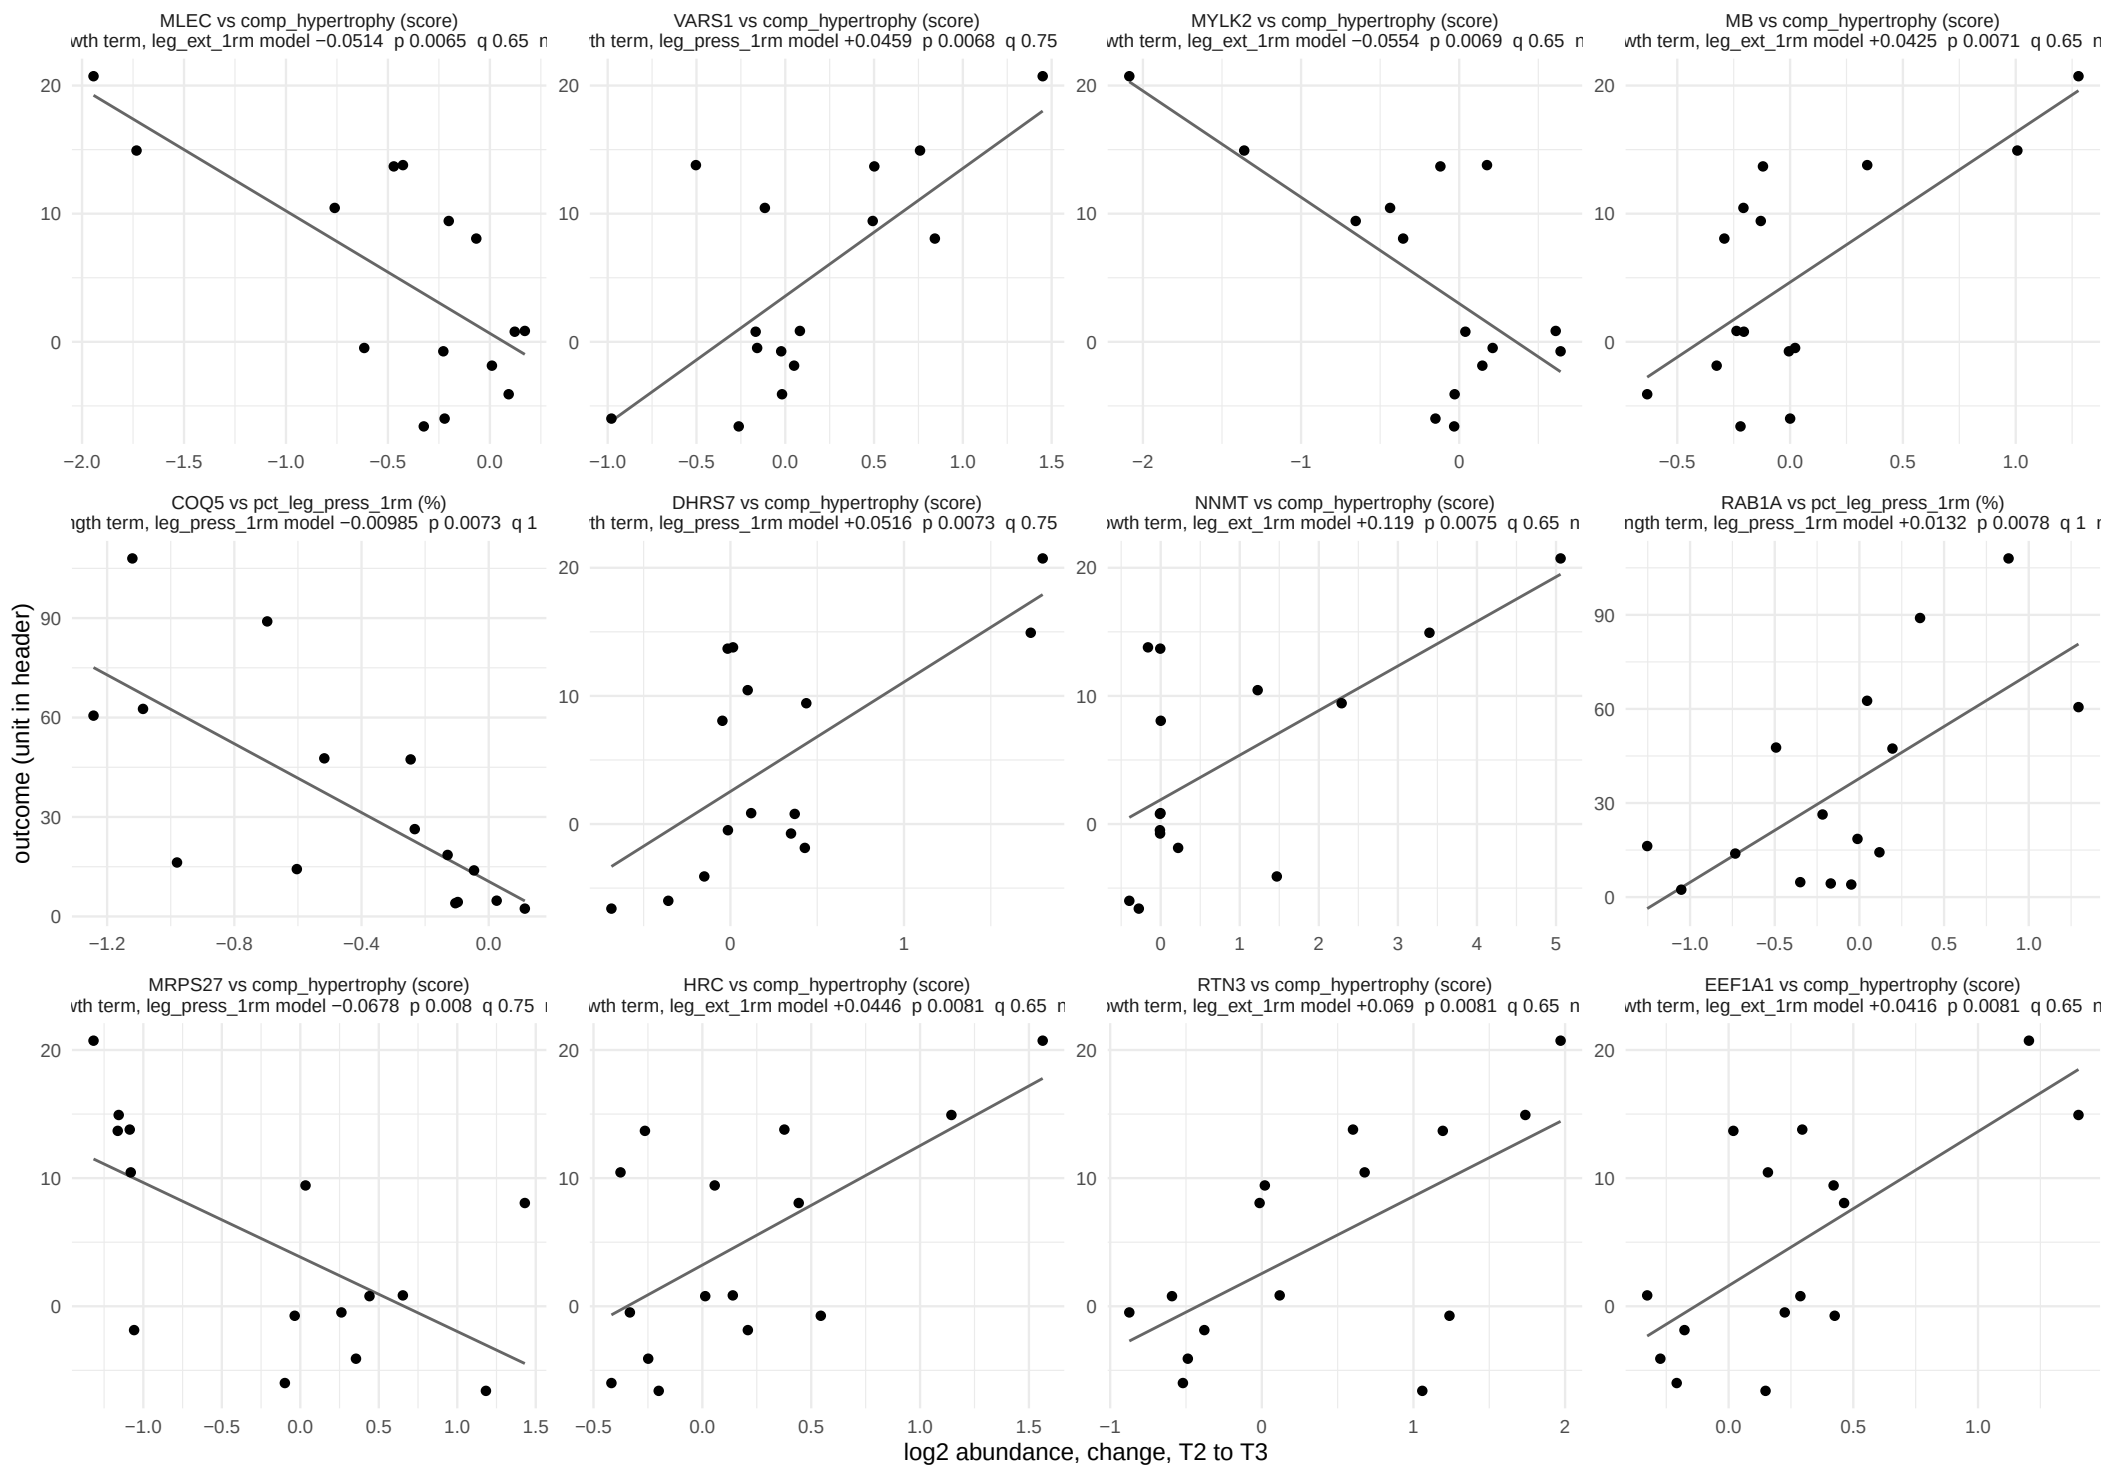

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/01_proteins.xlsx, two_predictor.

Two predictor, acute window


324 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 4 of 27.

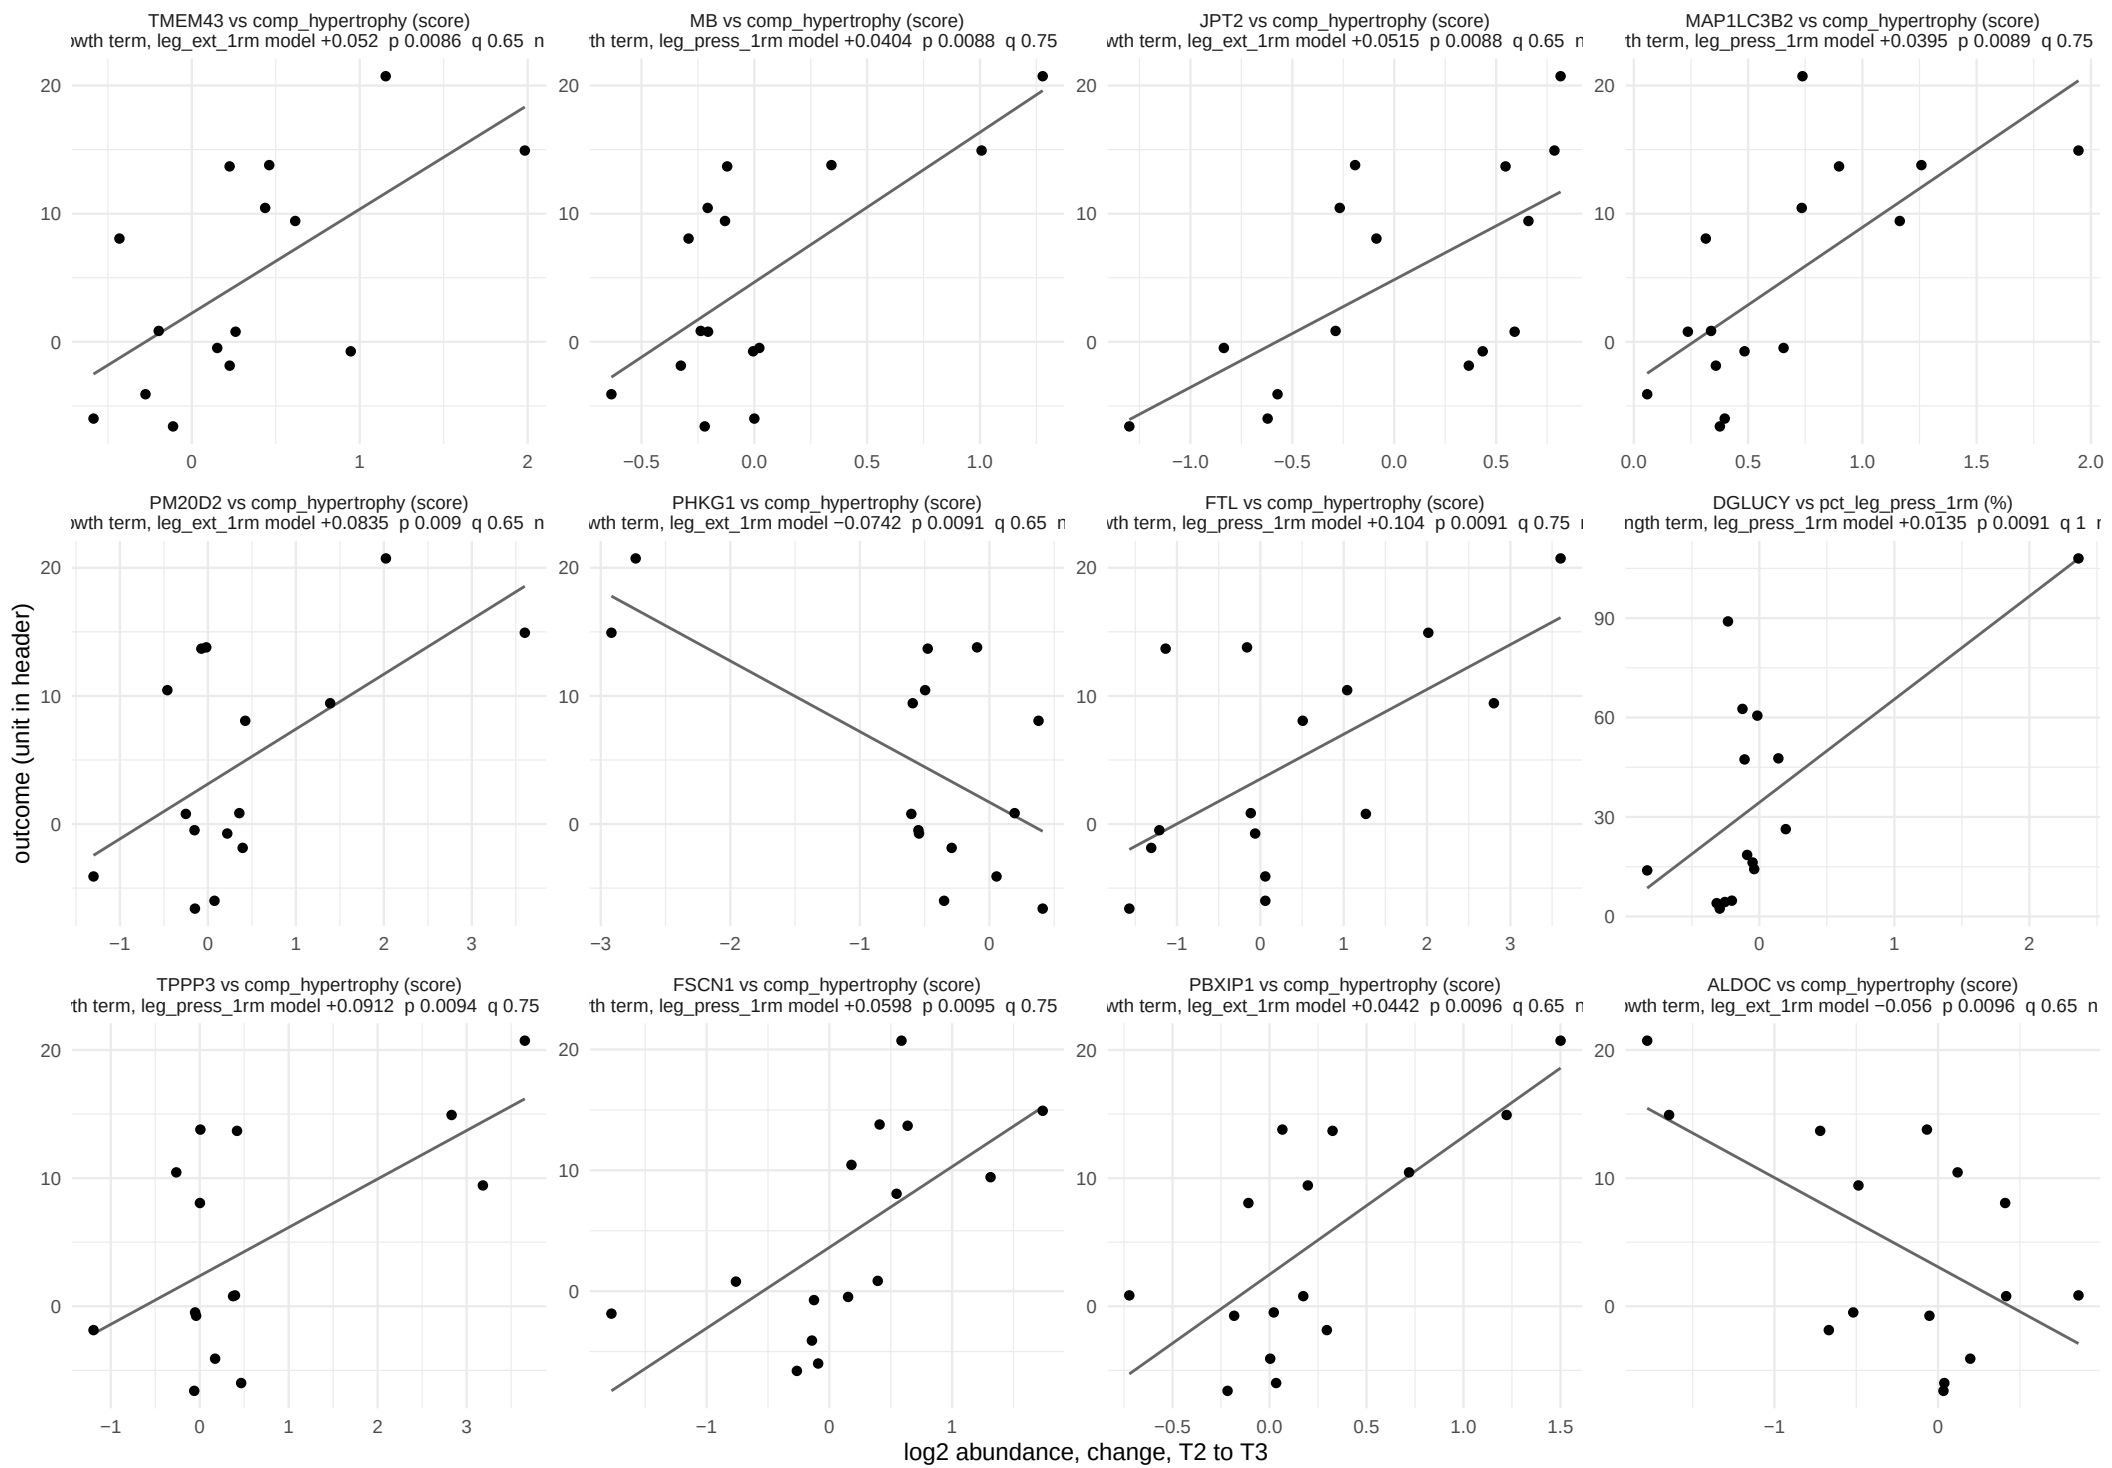

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/01_proteins.xlsx, two_predictor.

Two predictor, acute window


324 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 5 of 27.

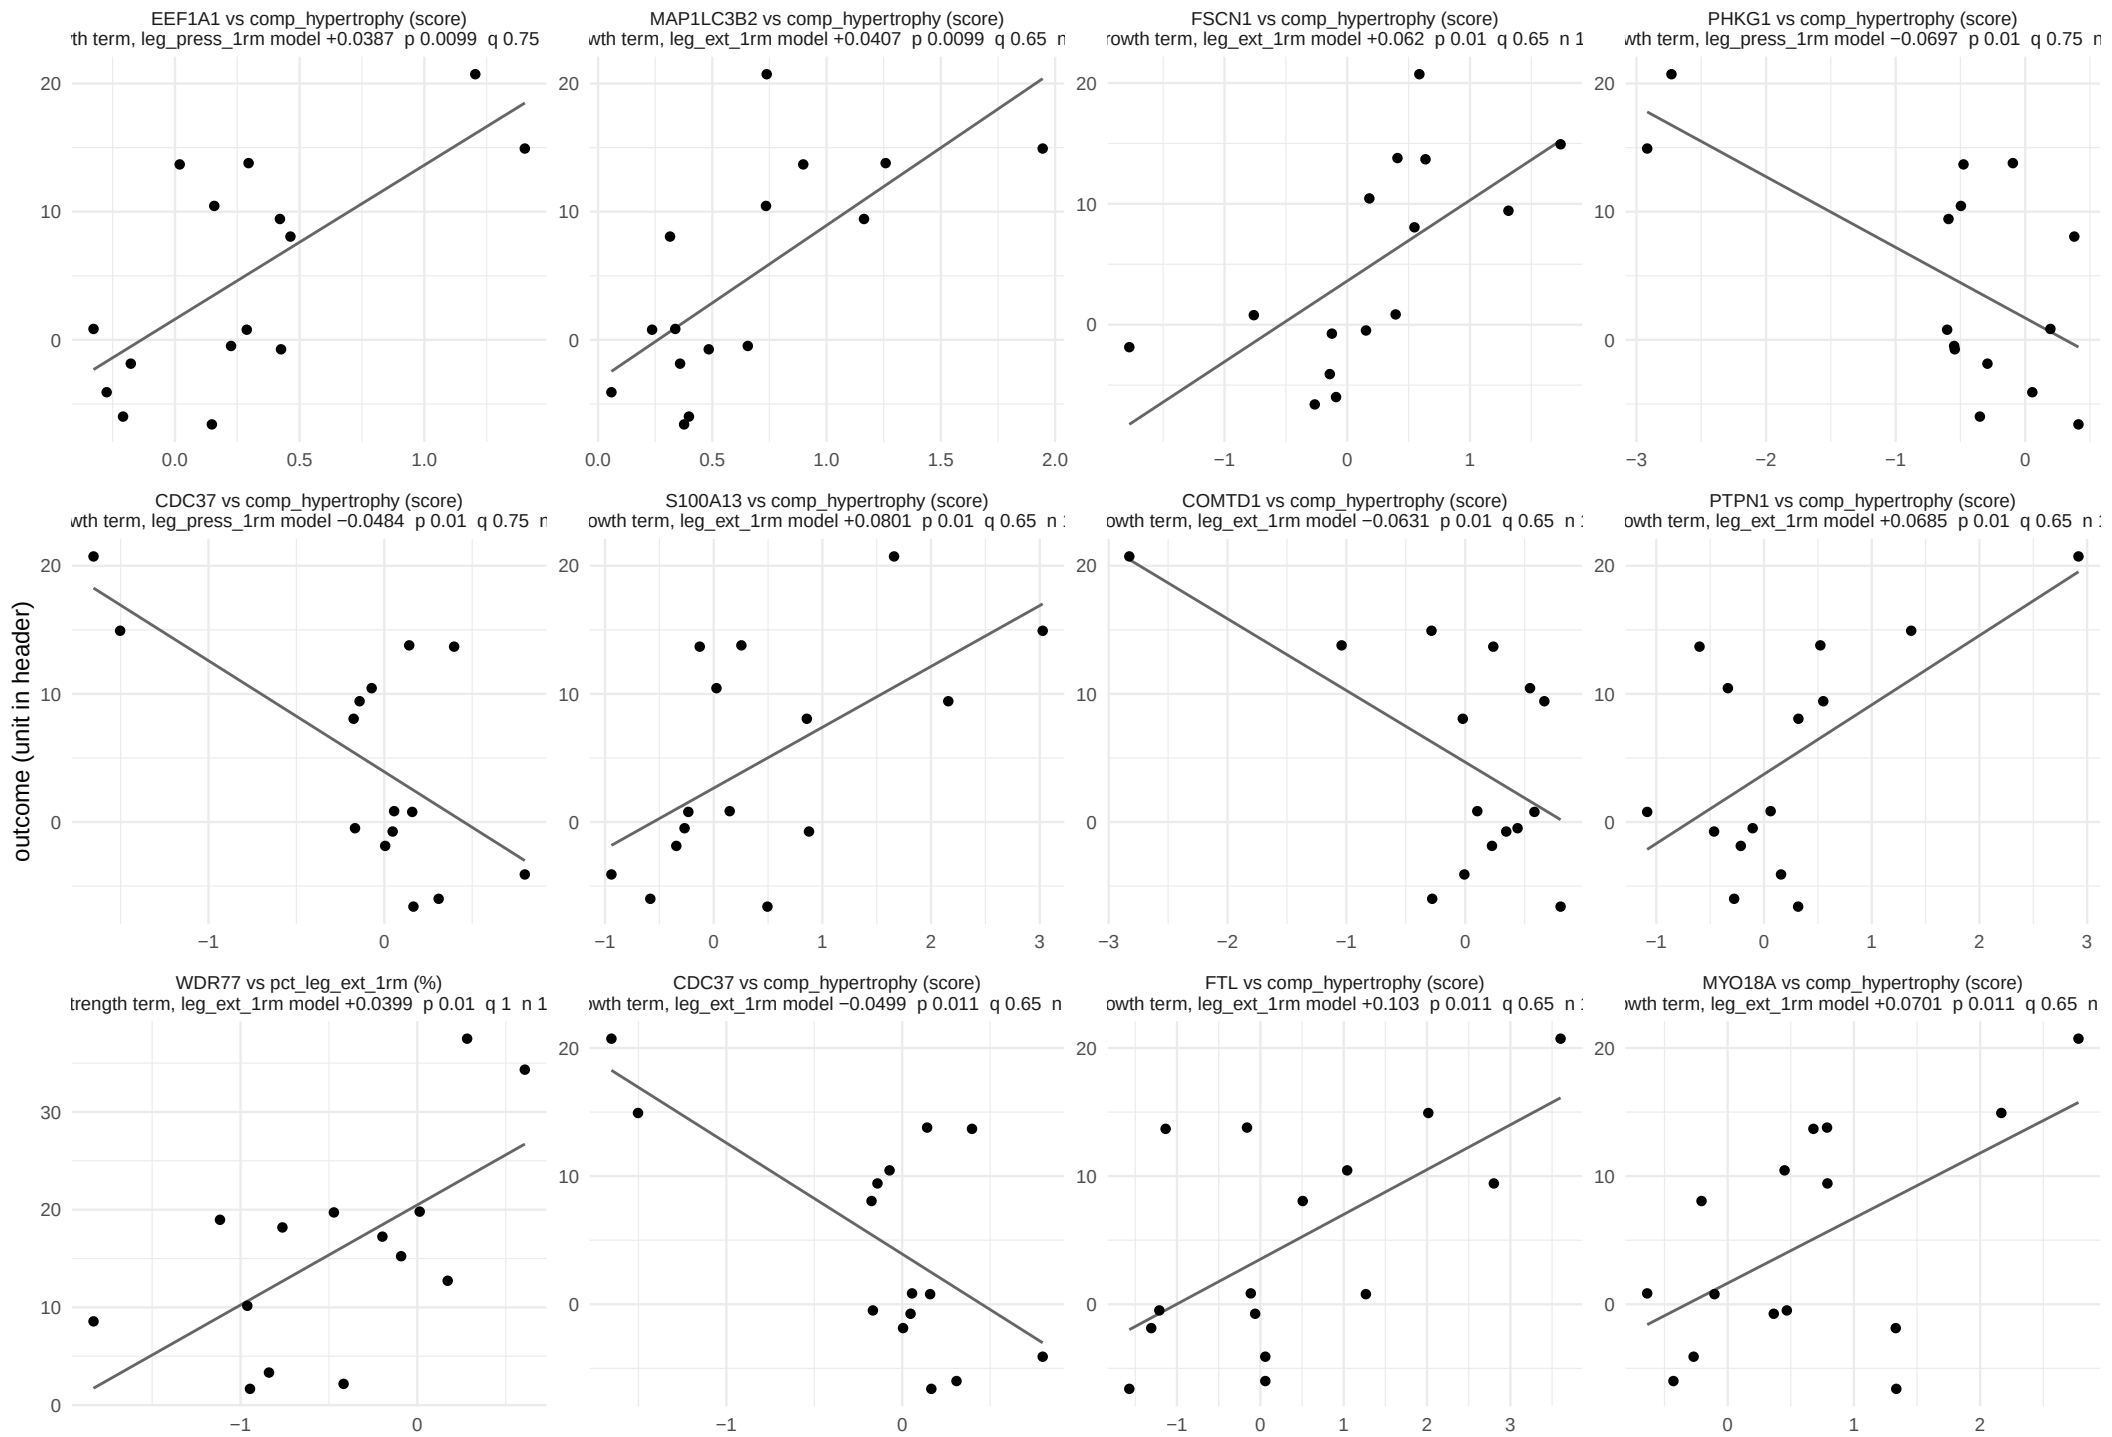

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/01_proteins.xlsx, two_predictor.

Two predictor, acute window


324 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 6 of 27.

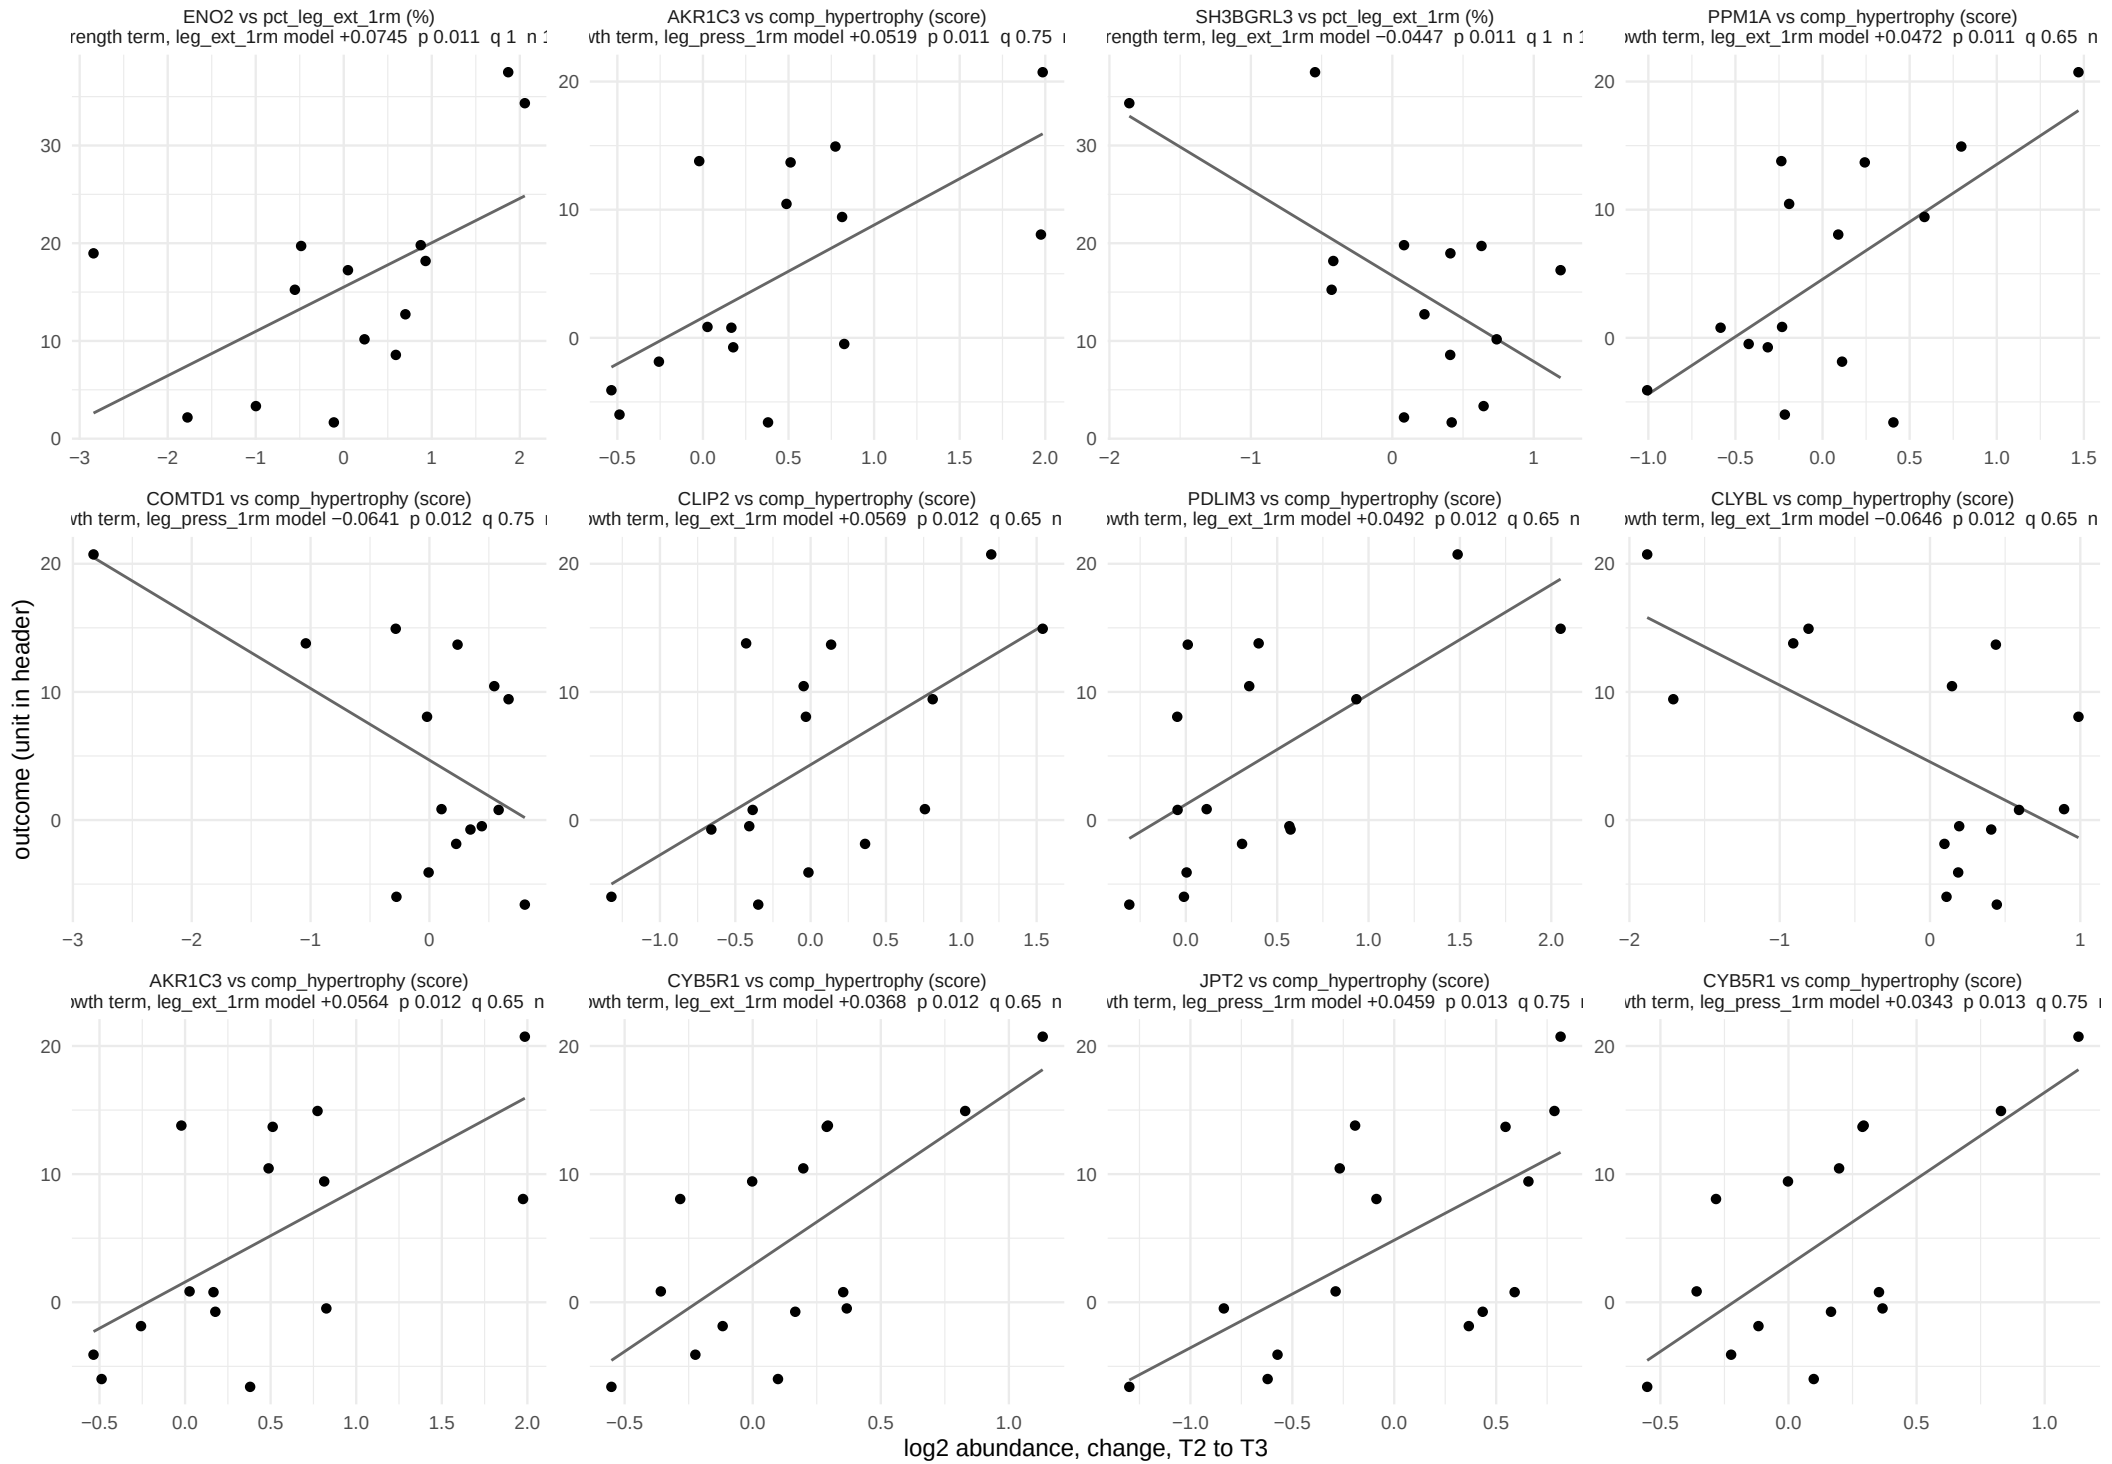

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/01_proteins.xlsx, two_predictor.

Two predictor, acute window


324 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 7 of 27.

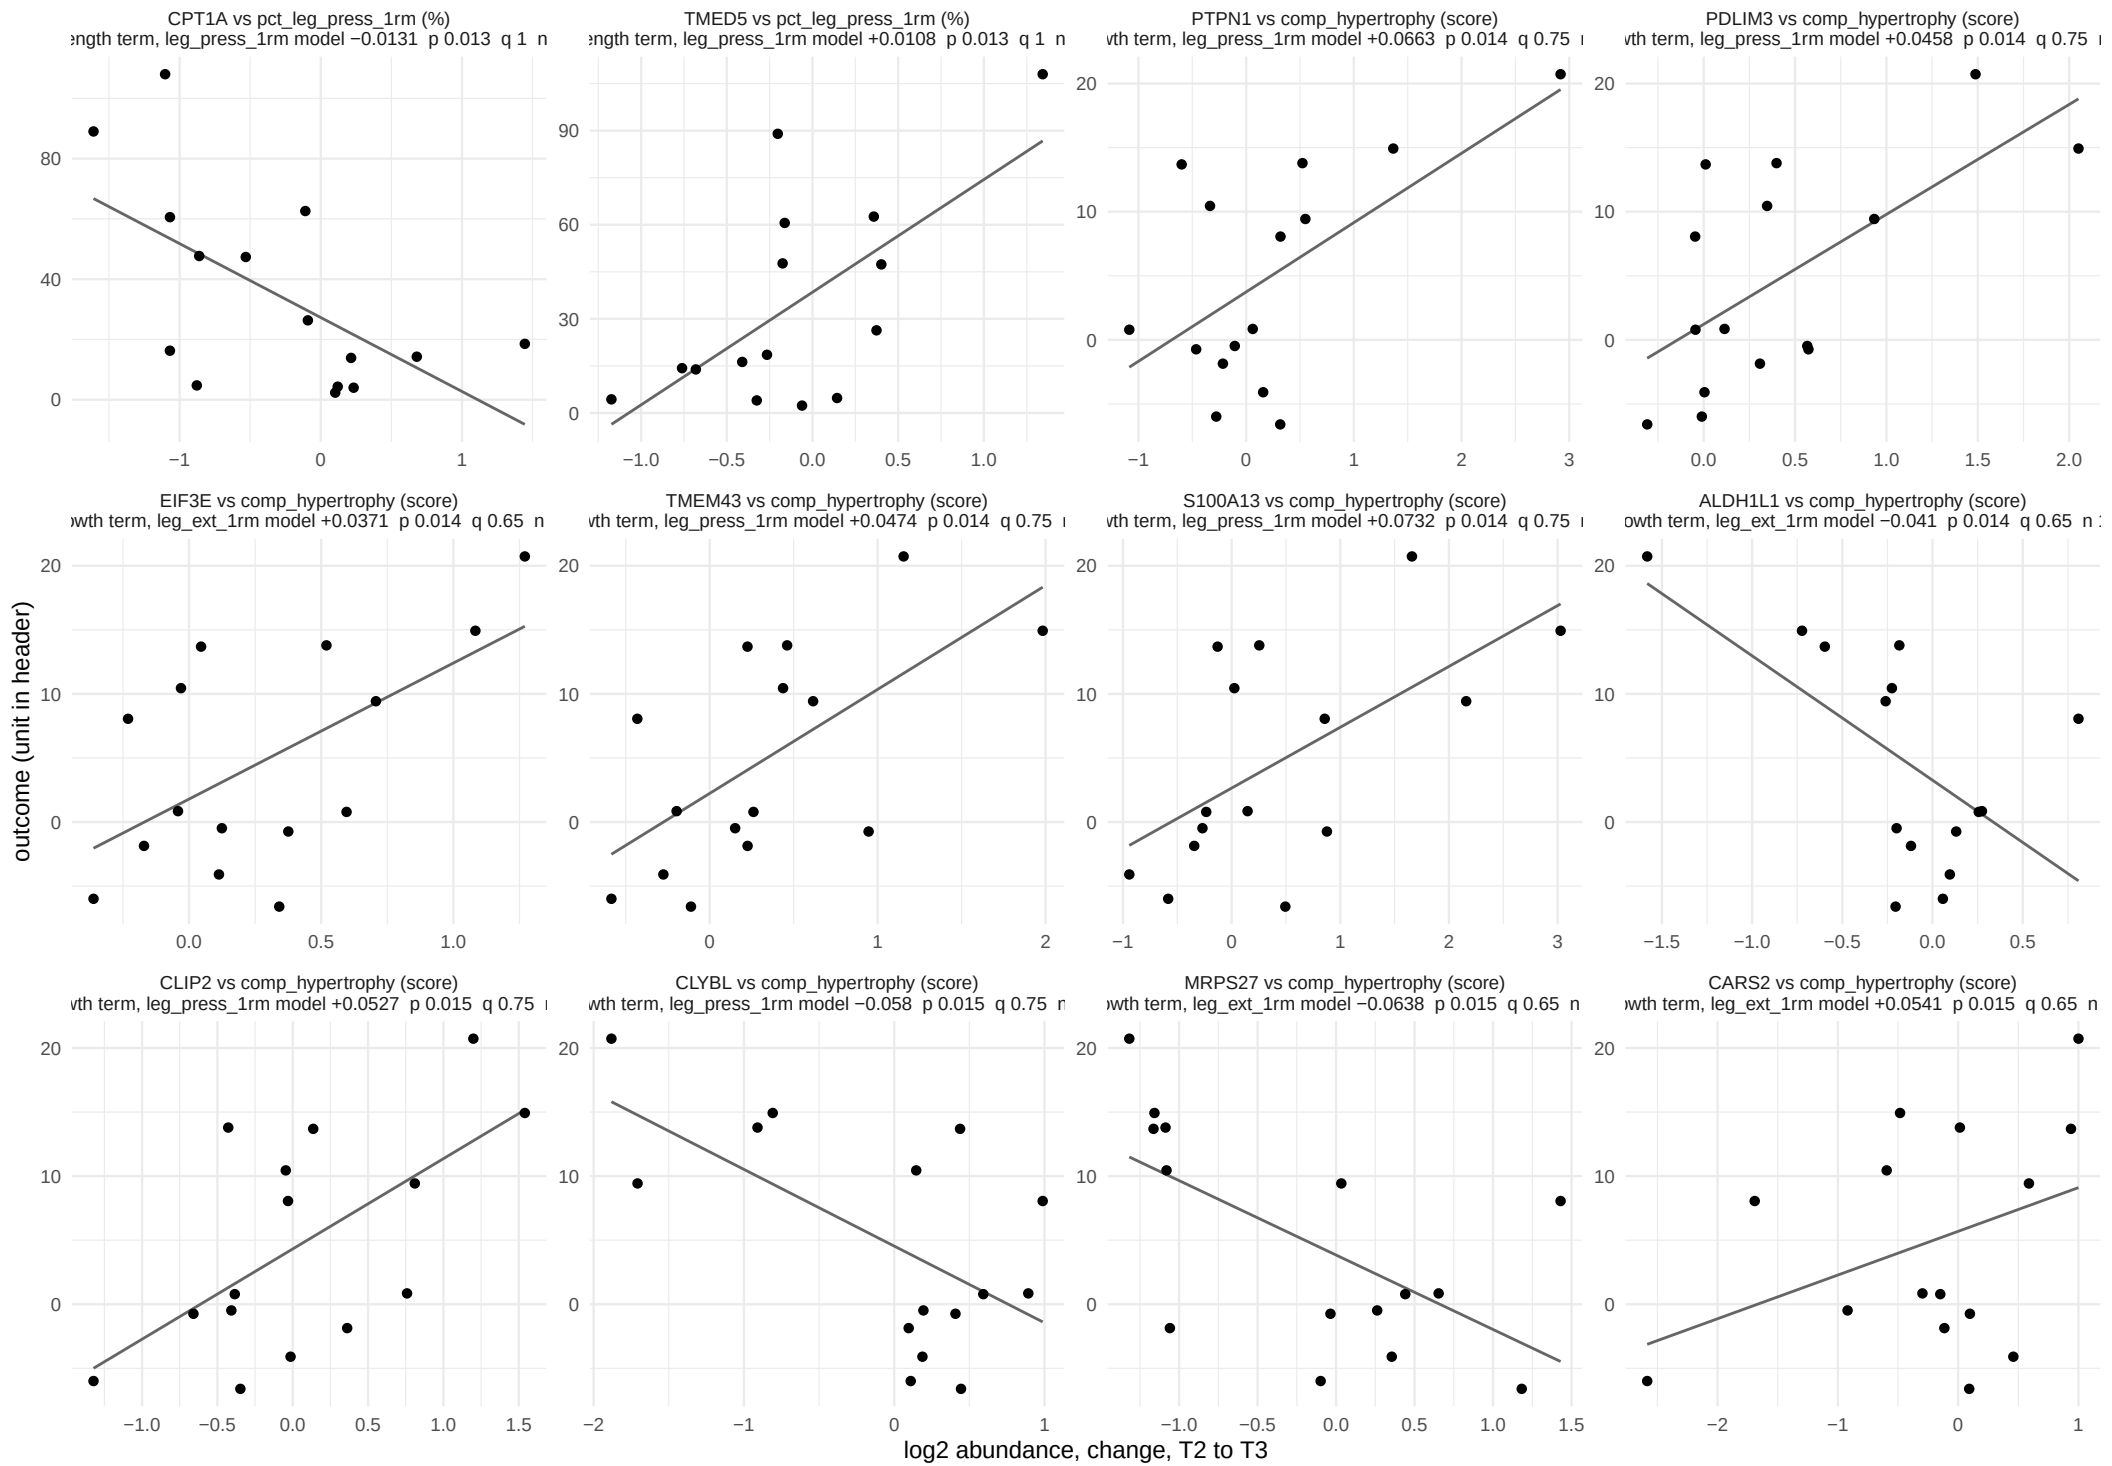

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/01_proteins.xlsx, two_predictor.

Two predictor, acute window


324 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 8 of 27.

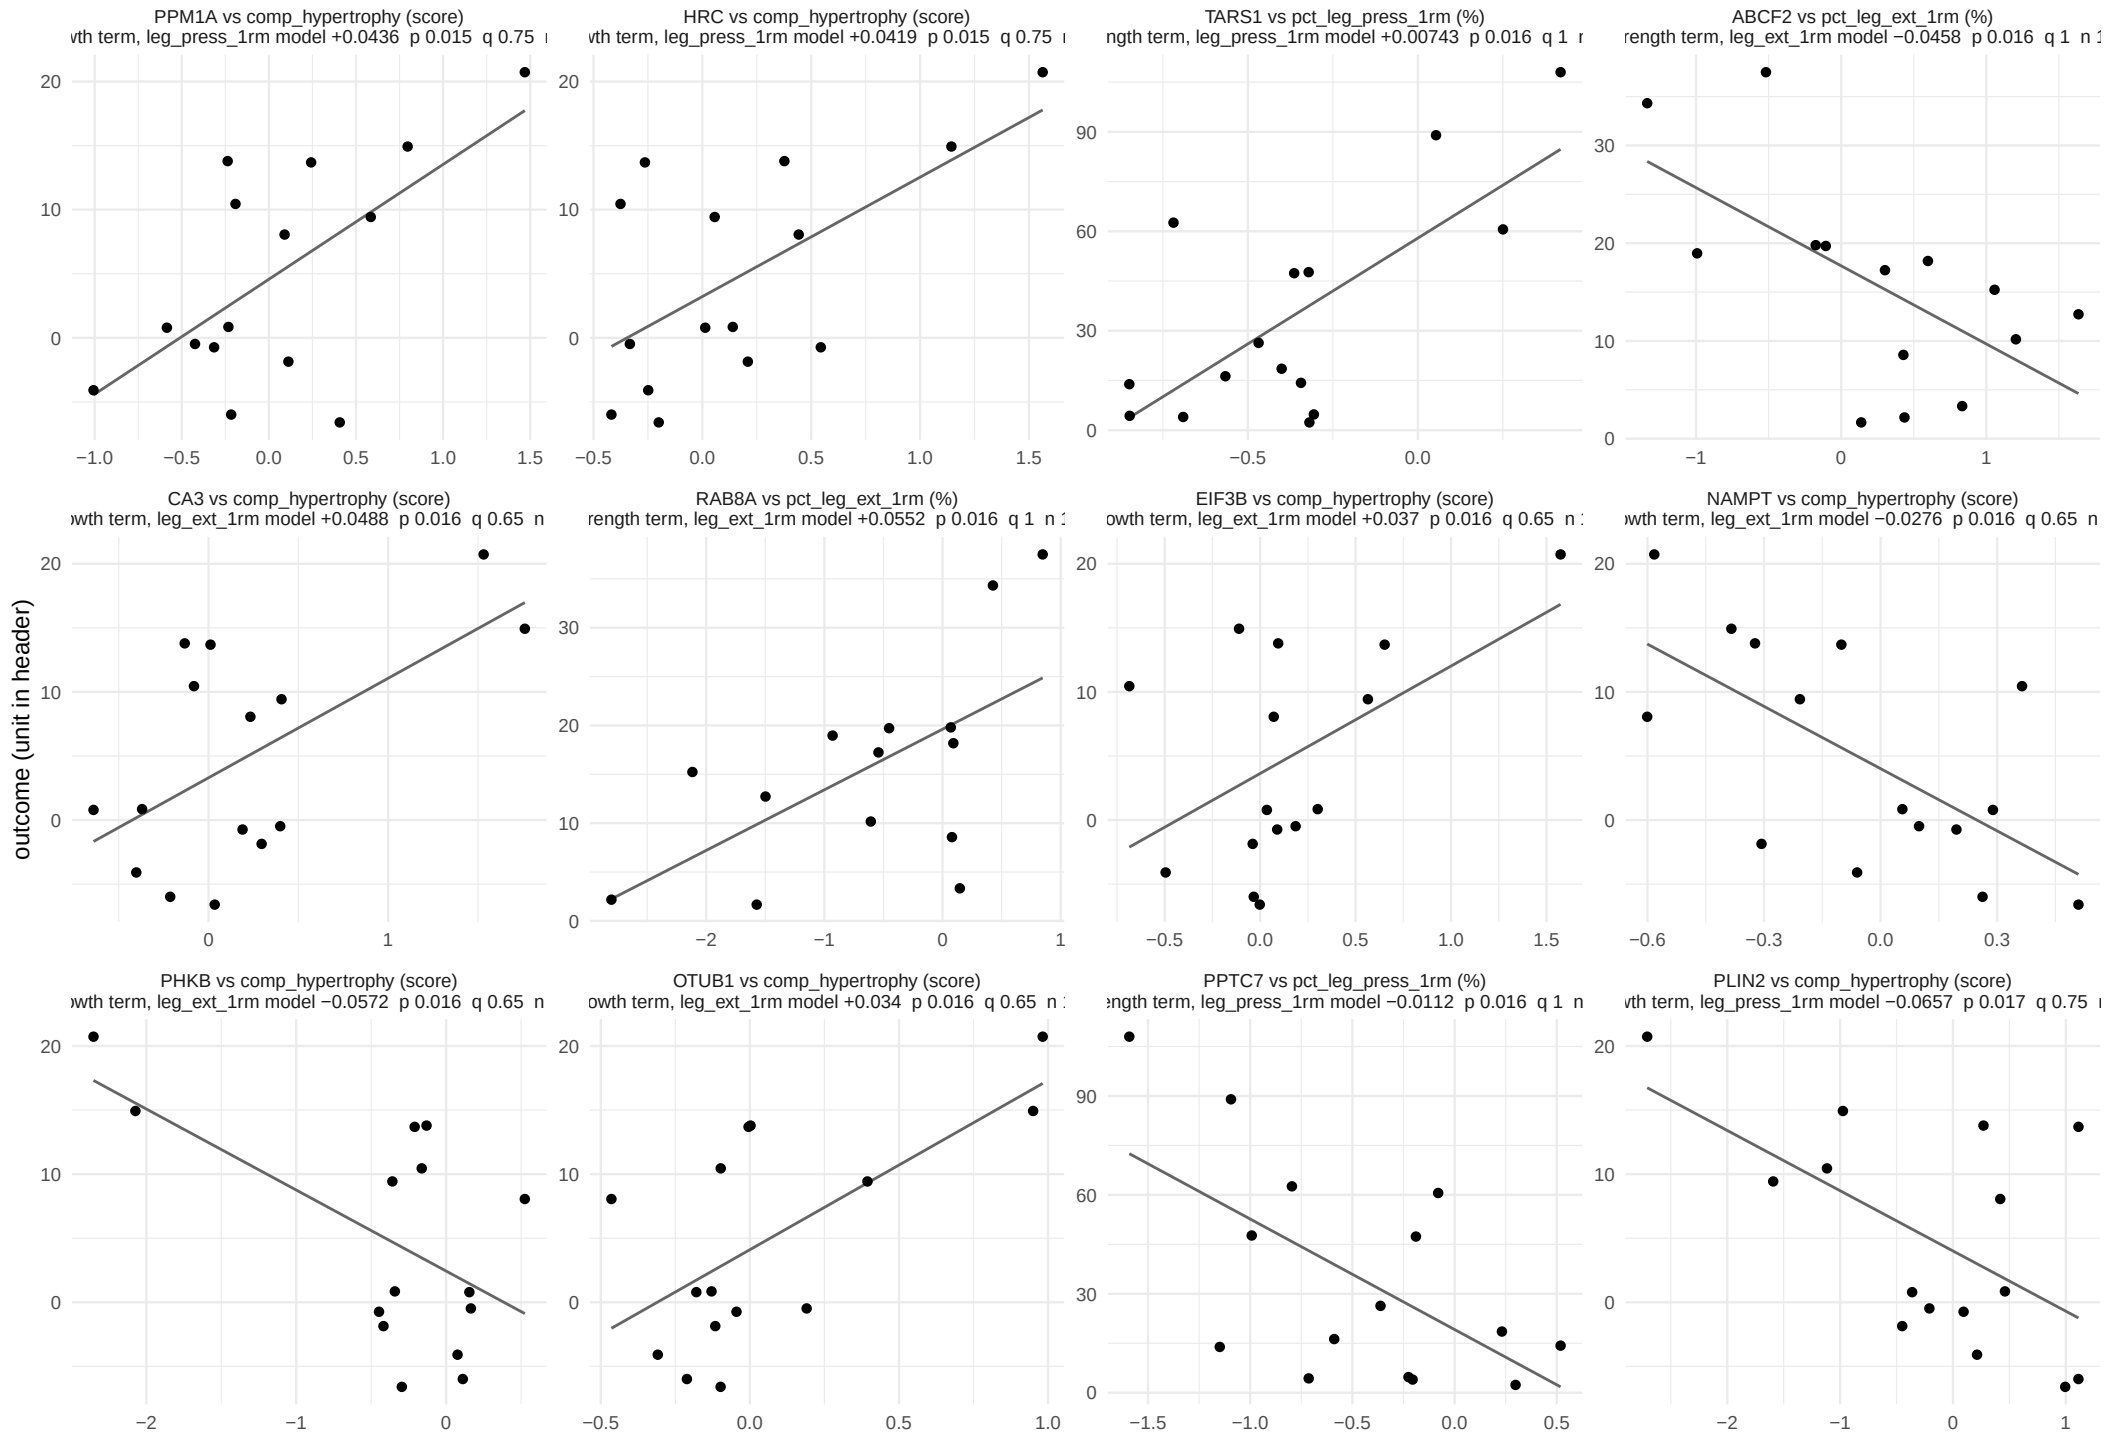

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/01_proteins.xlsx, two_predictor.

Two predictor, acute window


324 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 9 of 27.

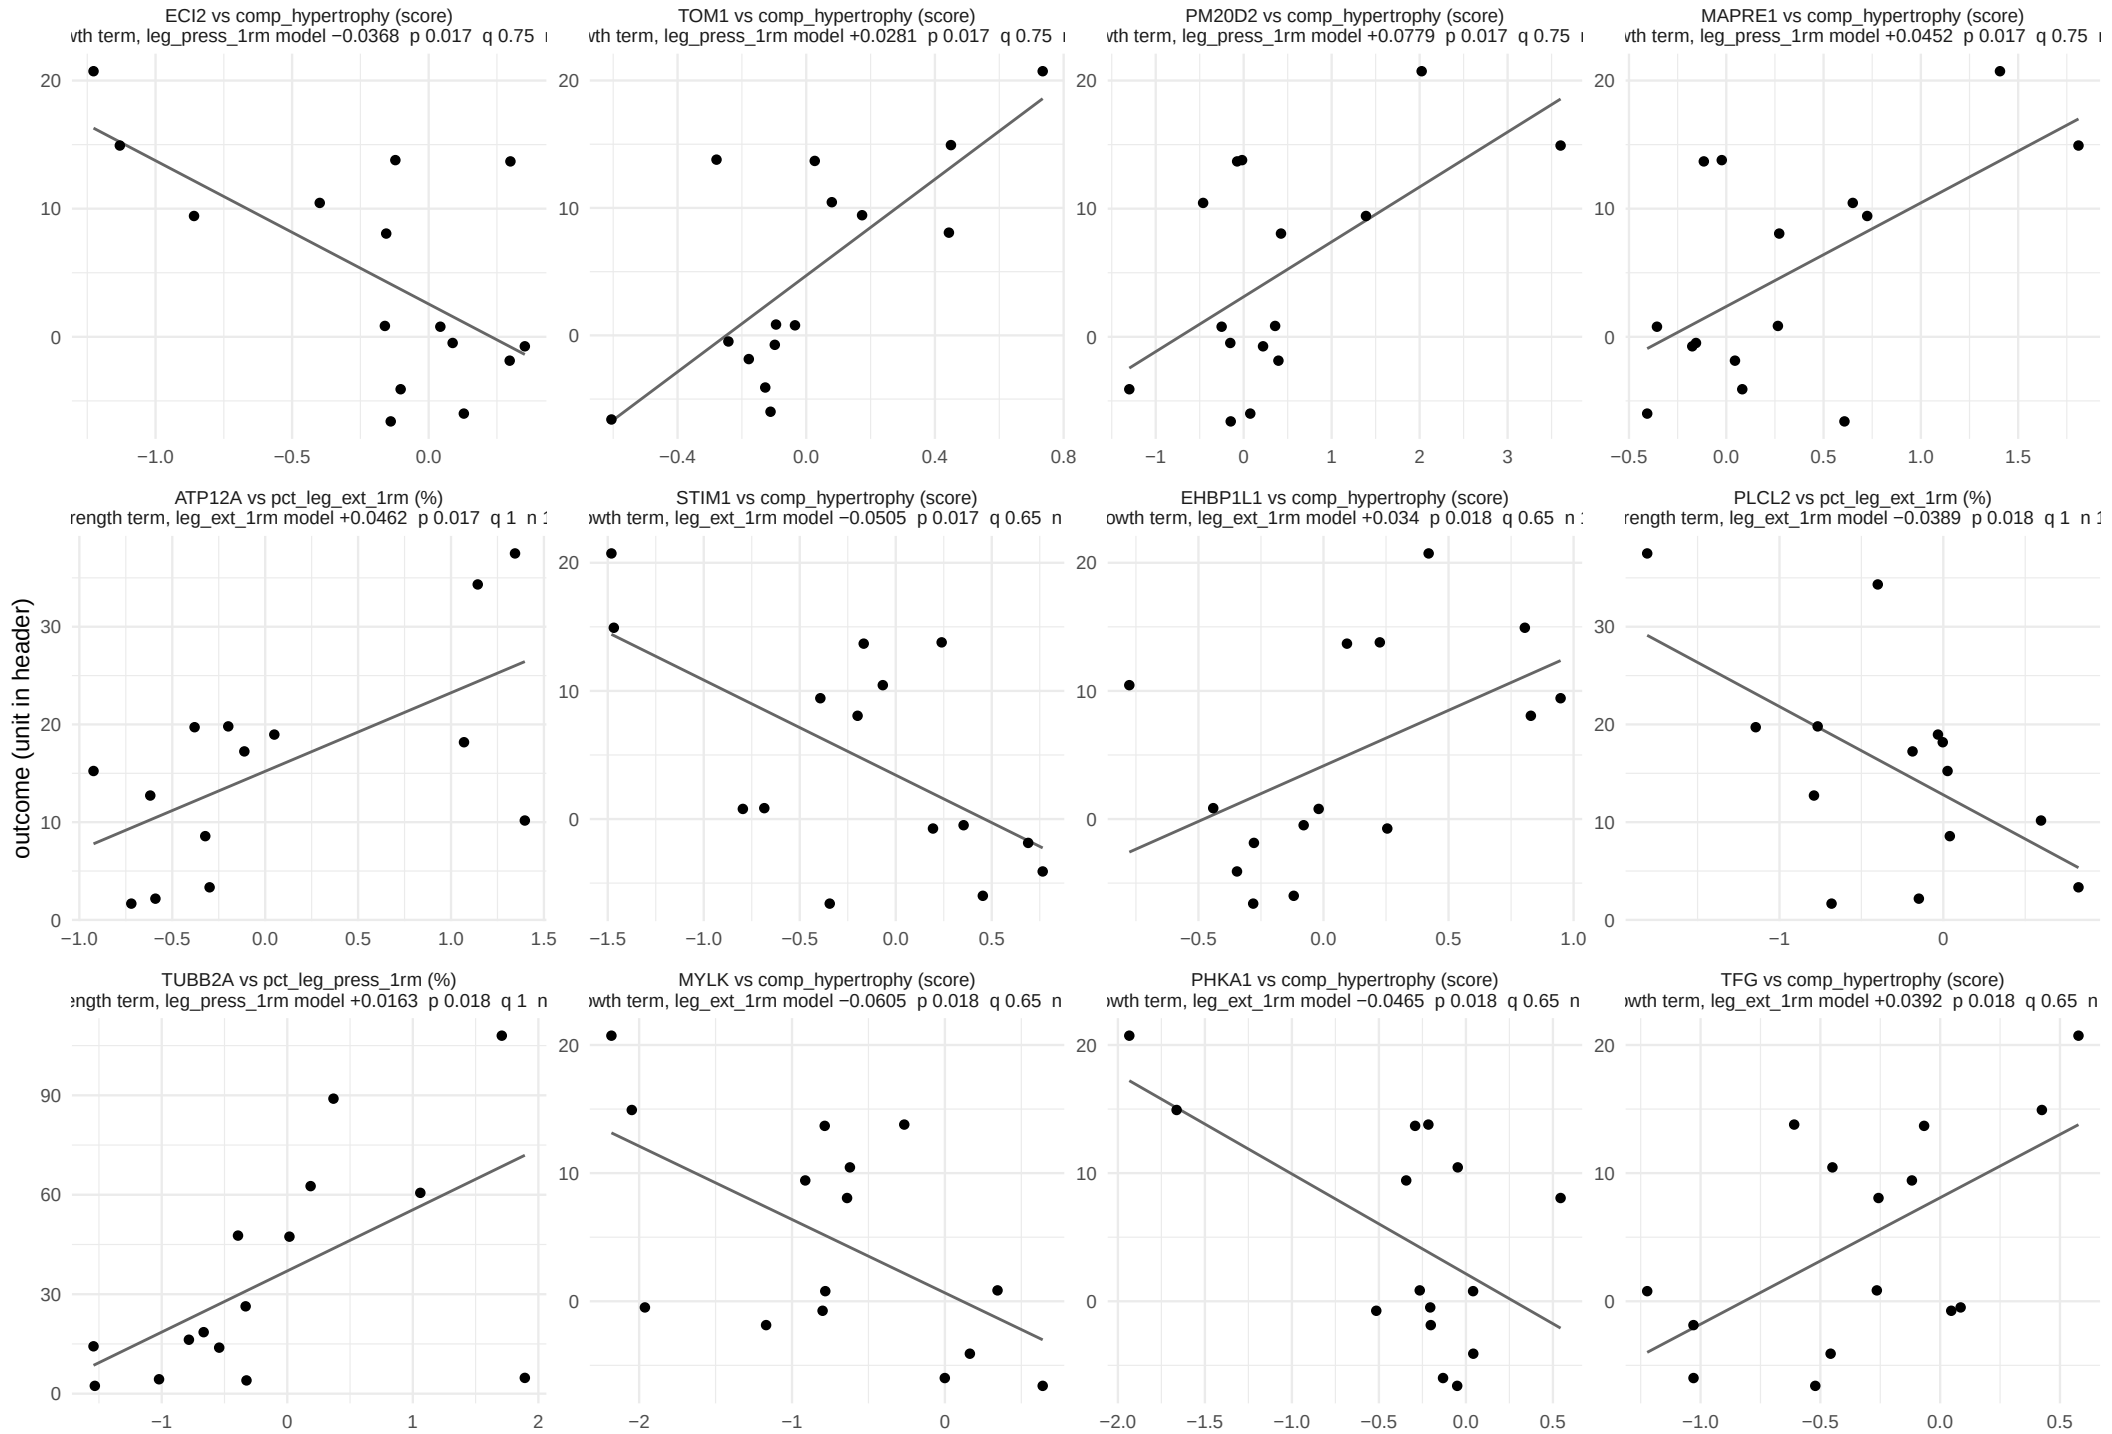

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/01_proteins.xlsx, two_predictor.

Two predictor, acute window


324 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 10 of 27.

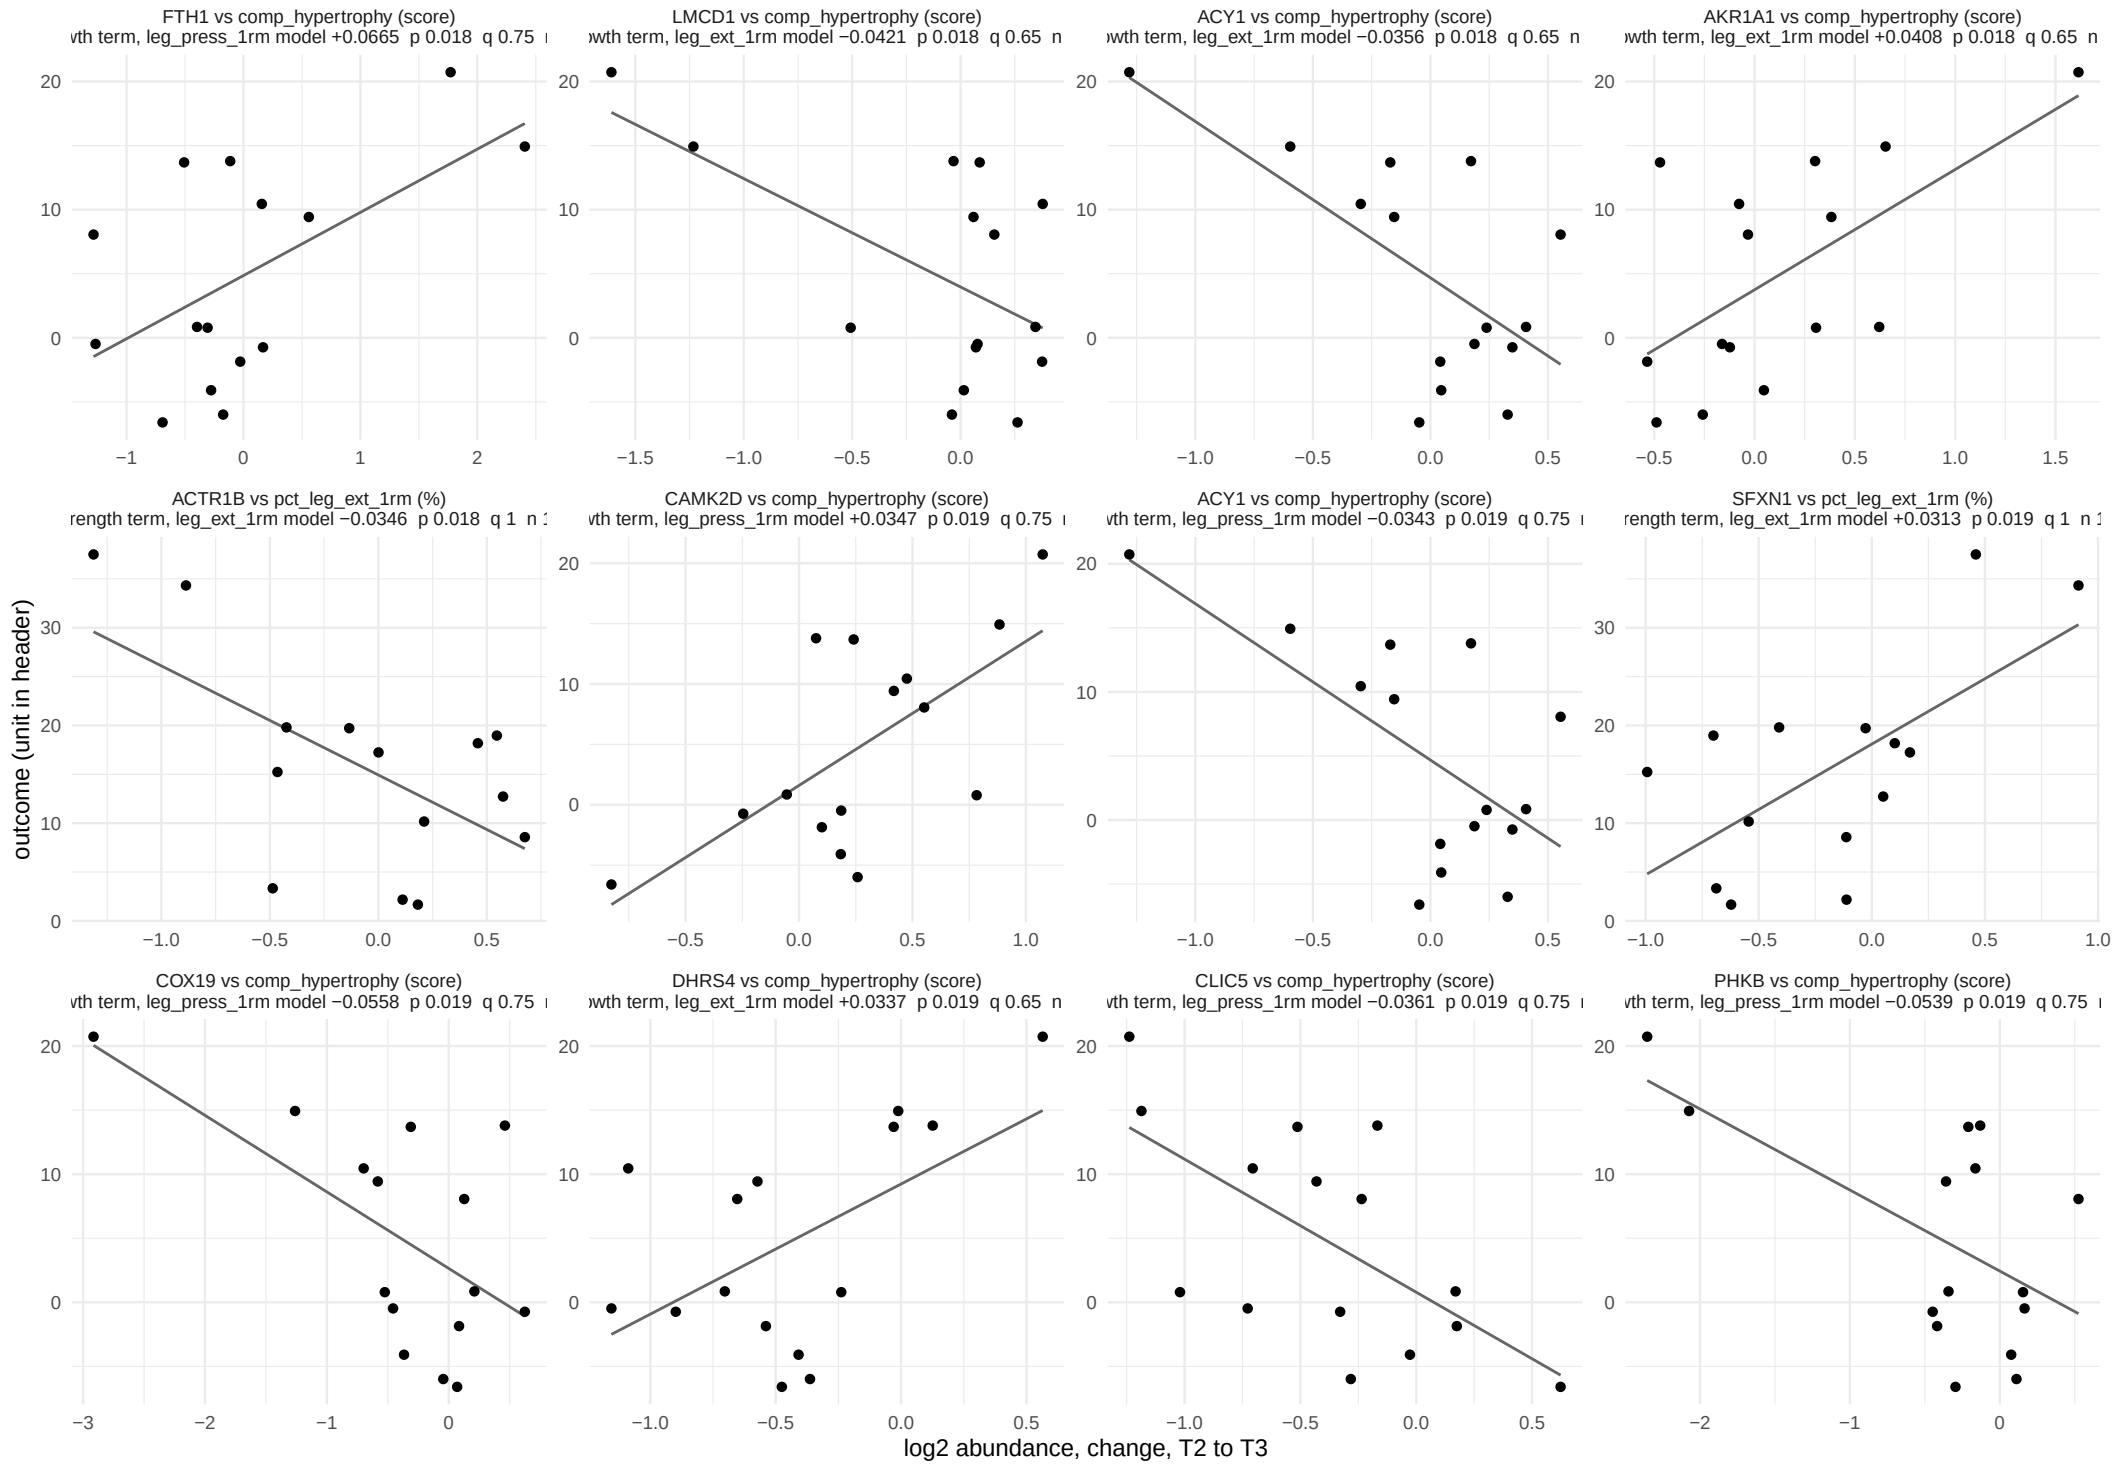

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/01_proteins.xlsx, two_predictor.

Two predictor, acute window


324 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 11 of 27.

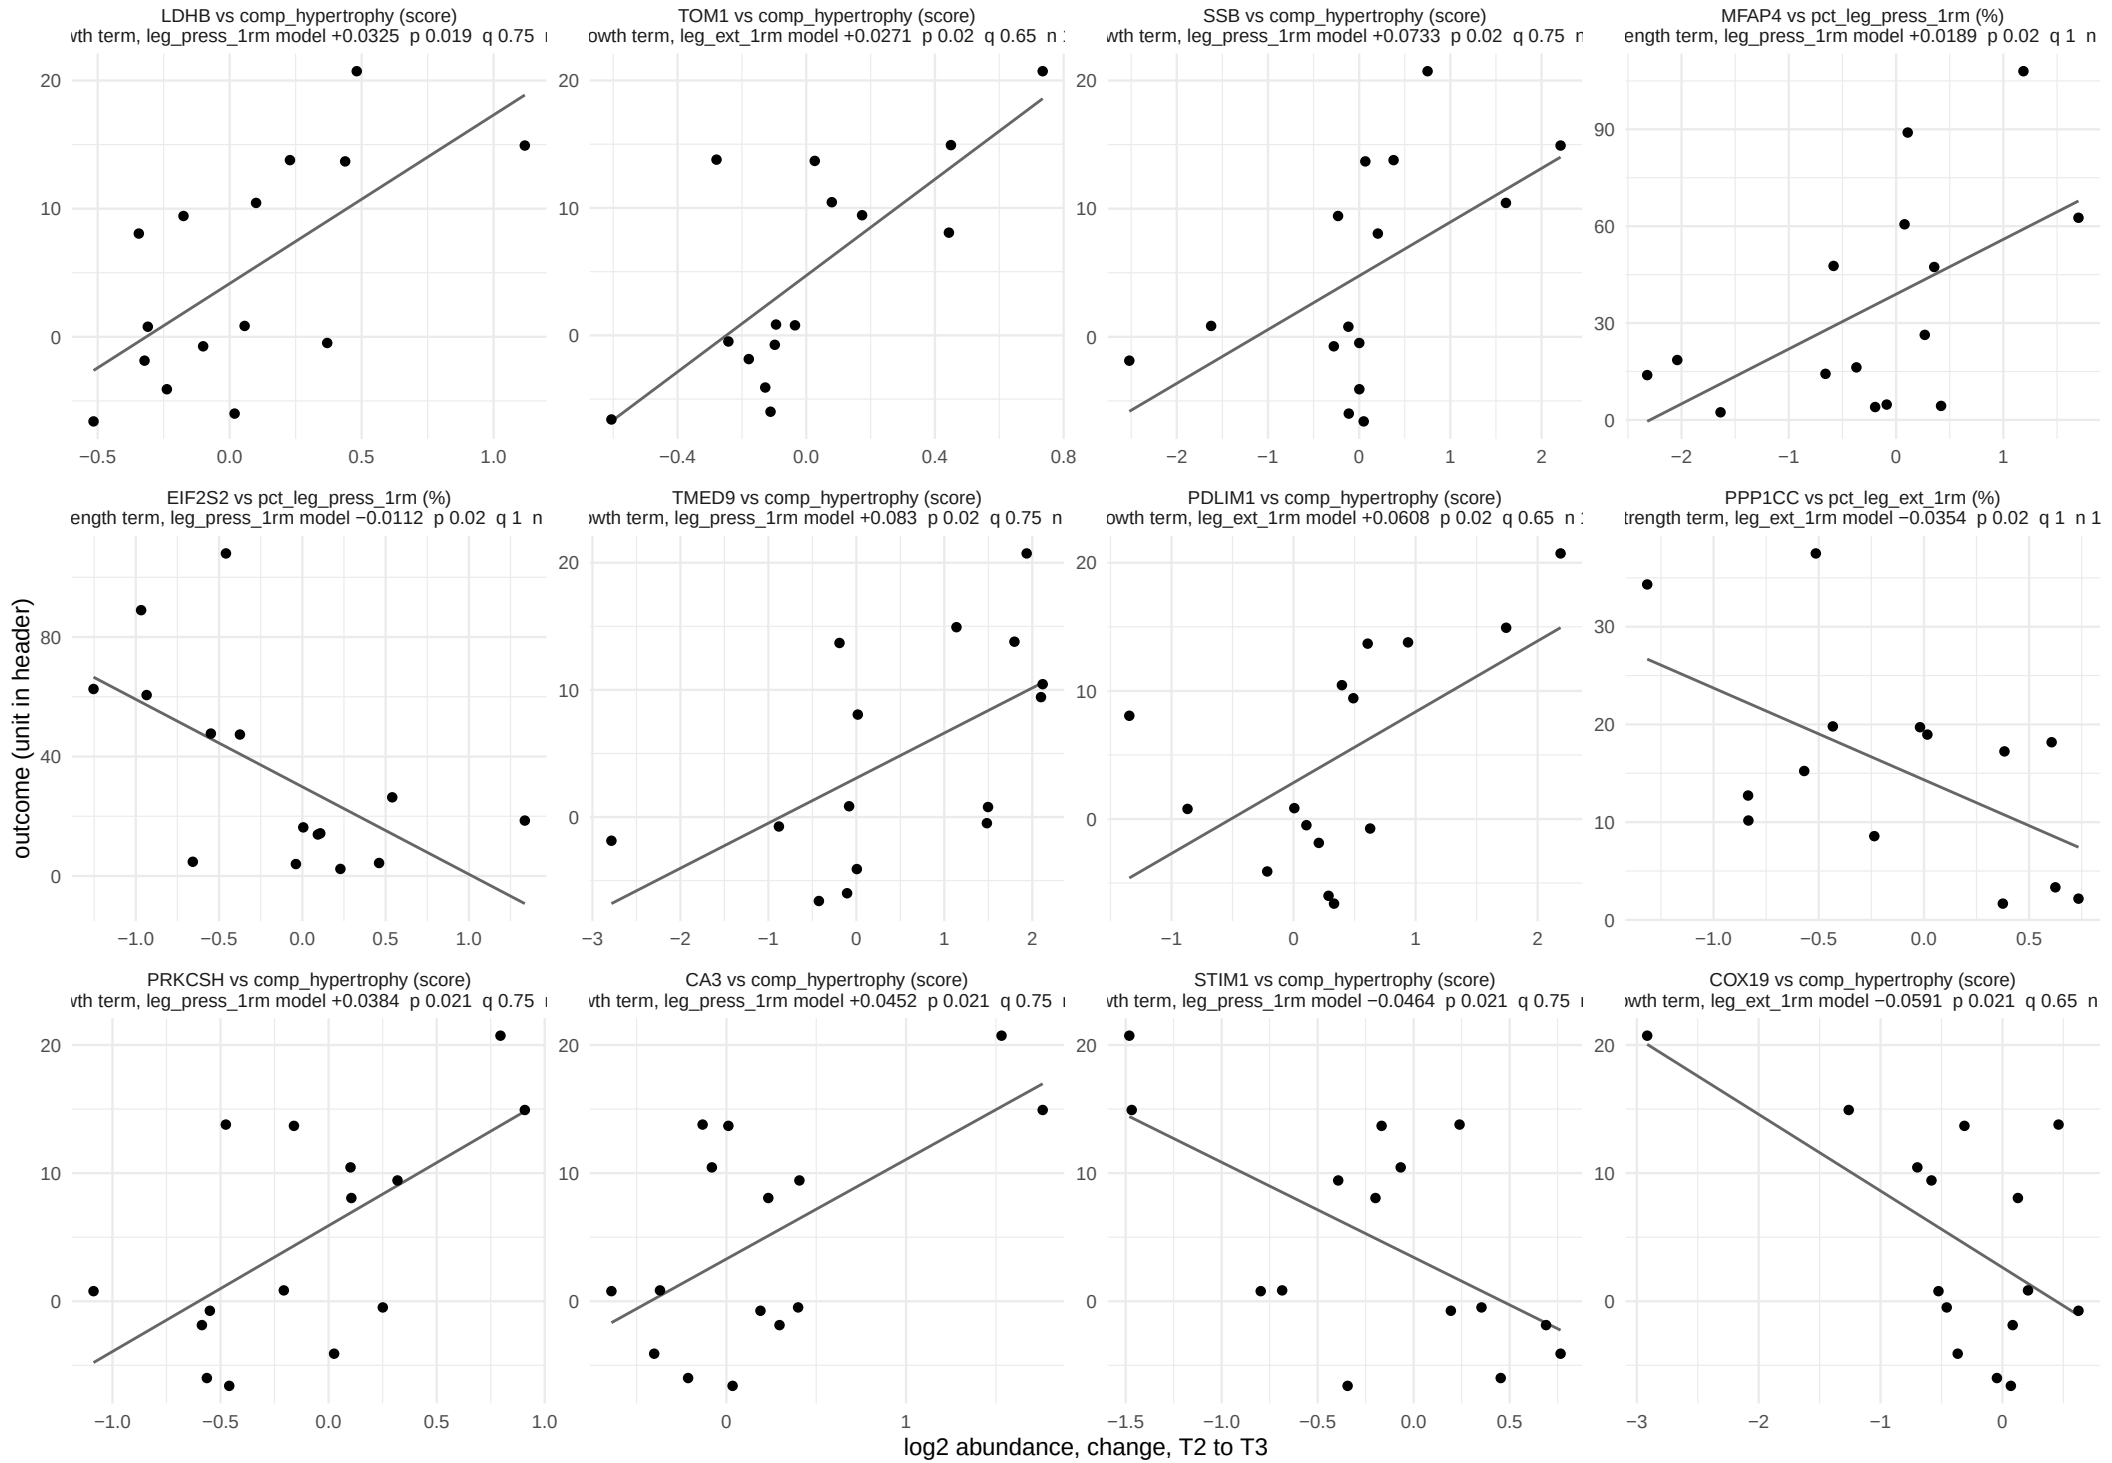

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/01_proteins.xlsx, two_predictor.

Two predictor, acute window


324 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 12 of 27.

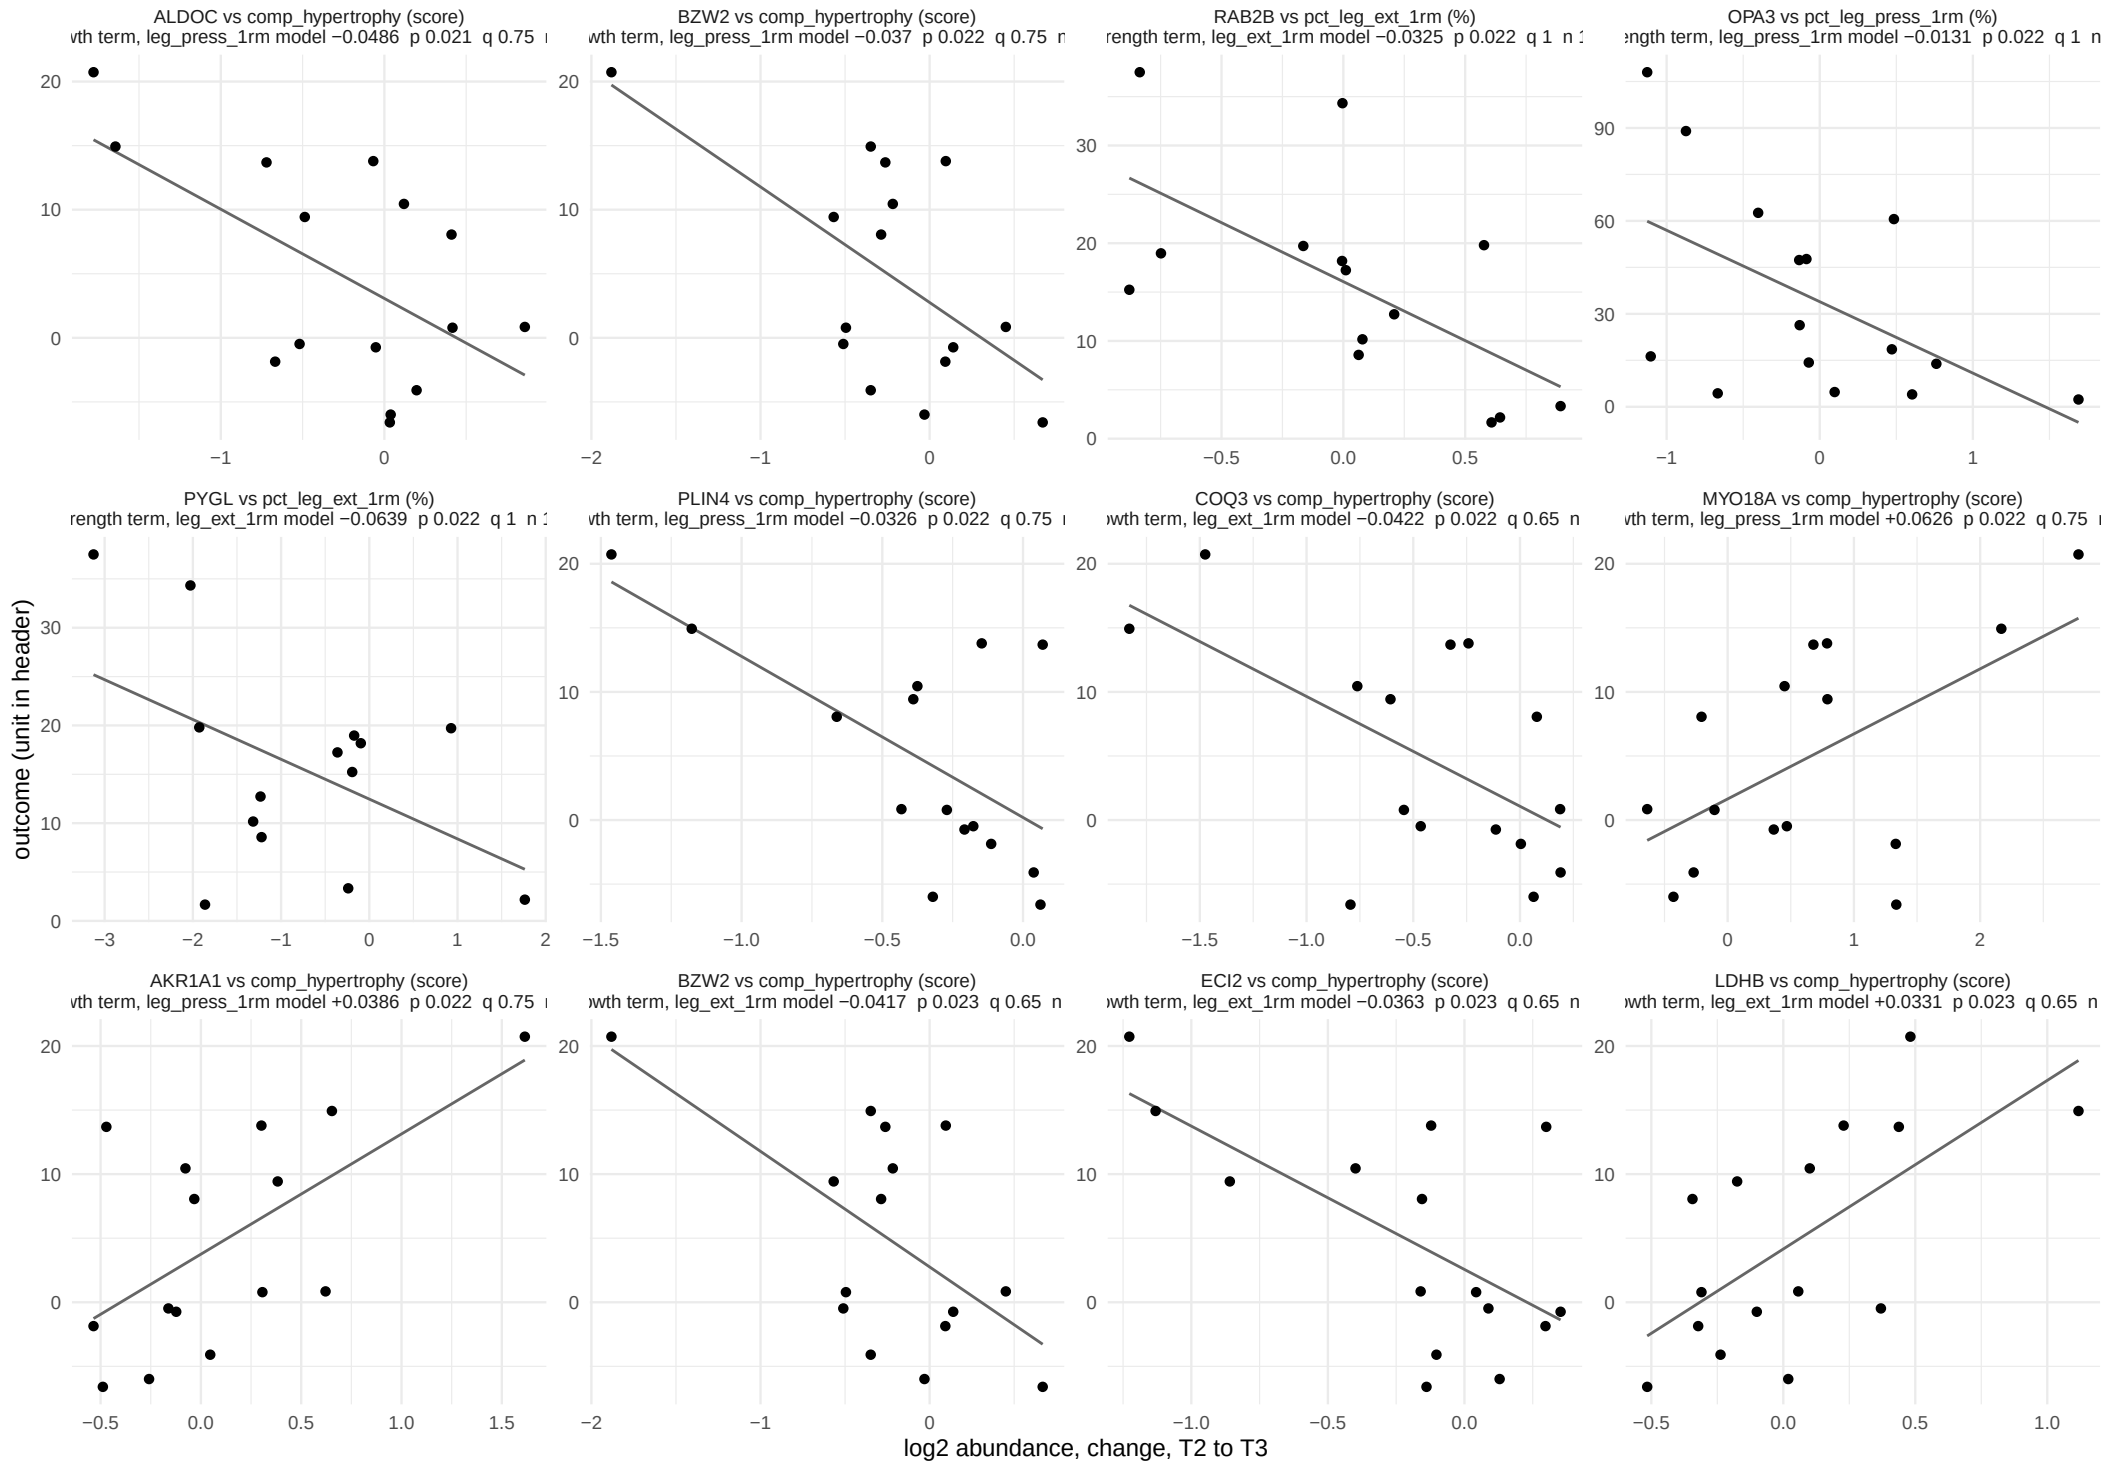

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/01_proteins.xlsx, two_predictor.


Two predictor, acute window

324 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 13 of 27.

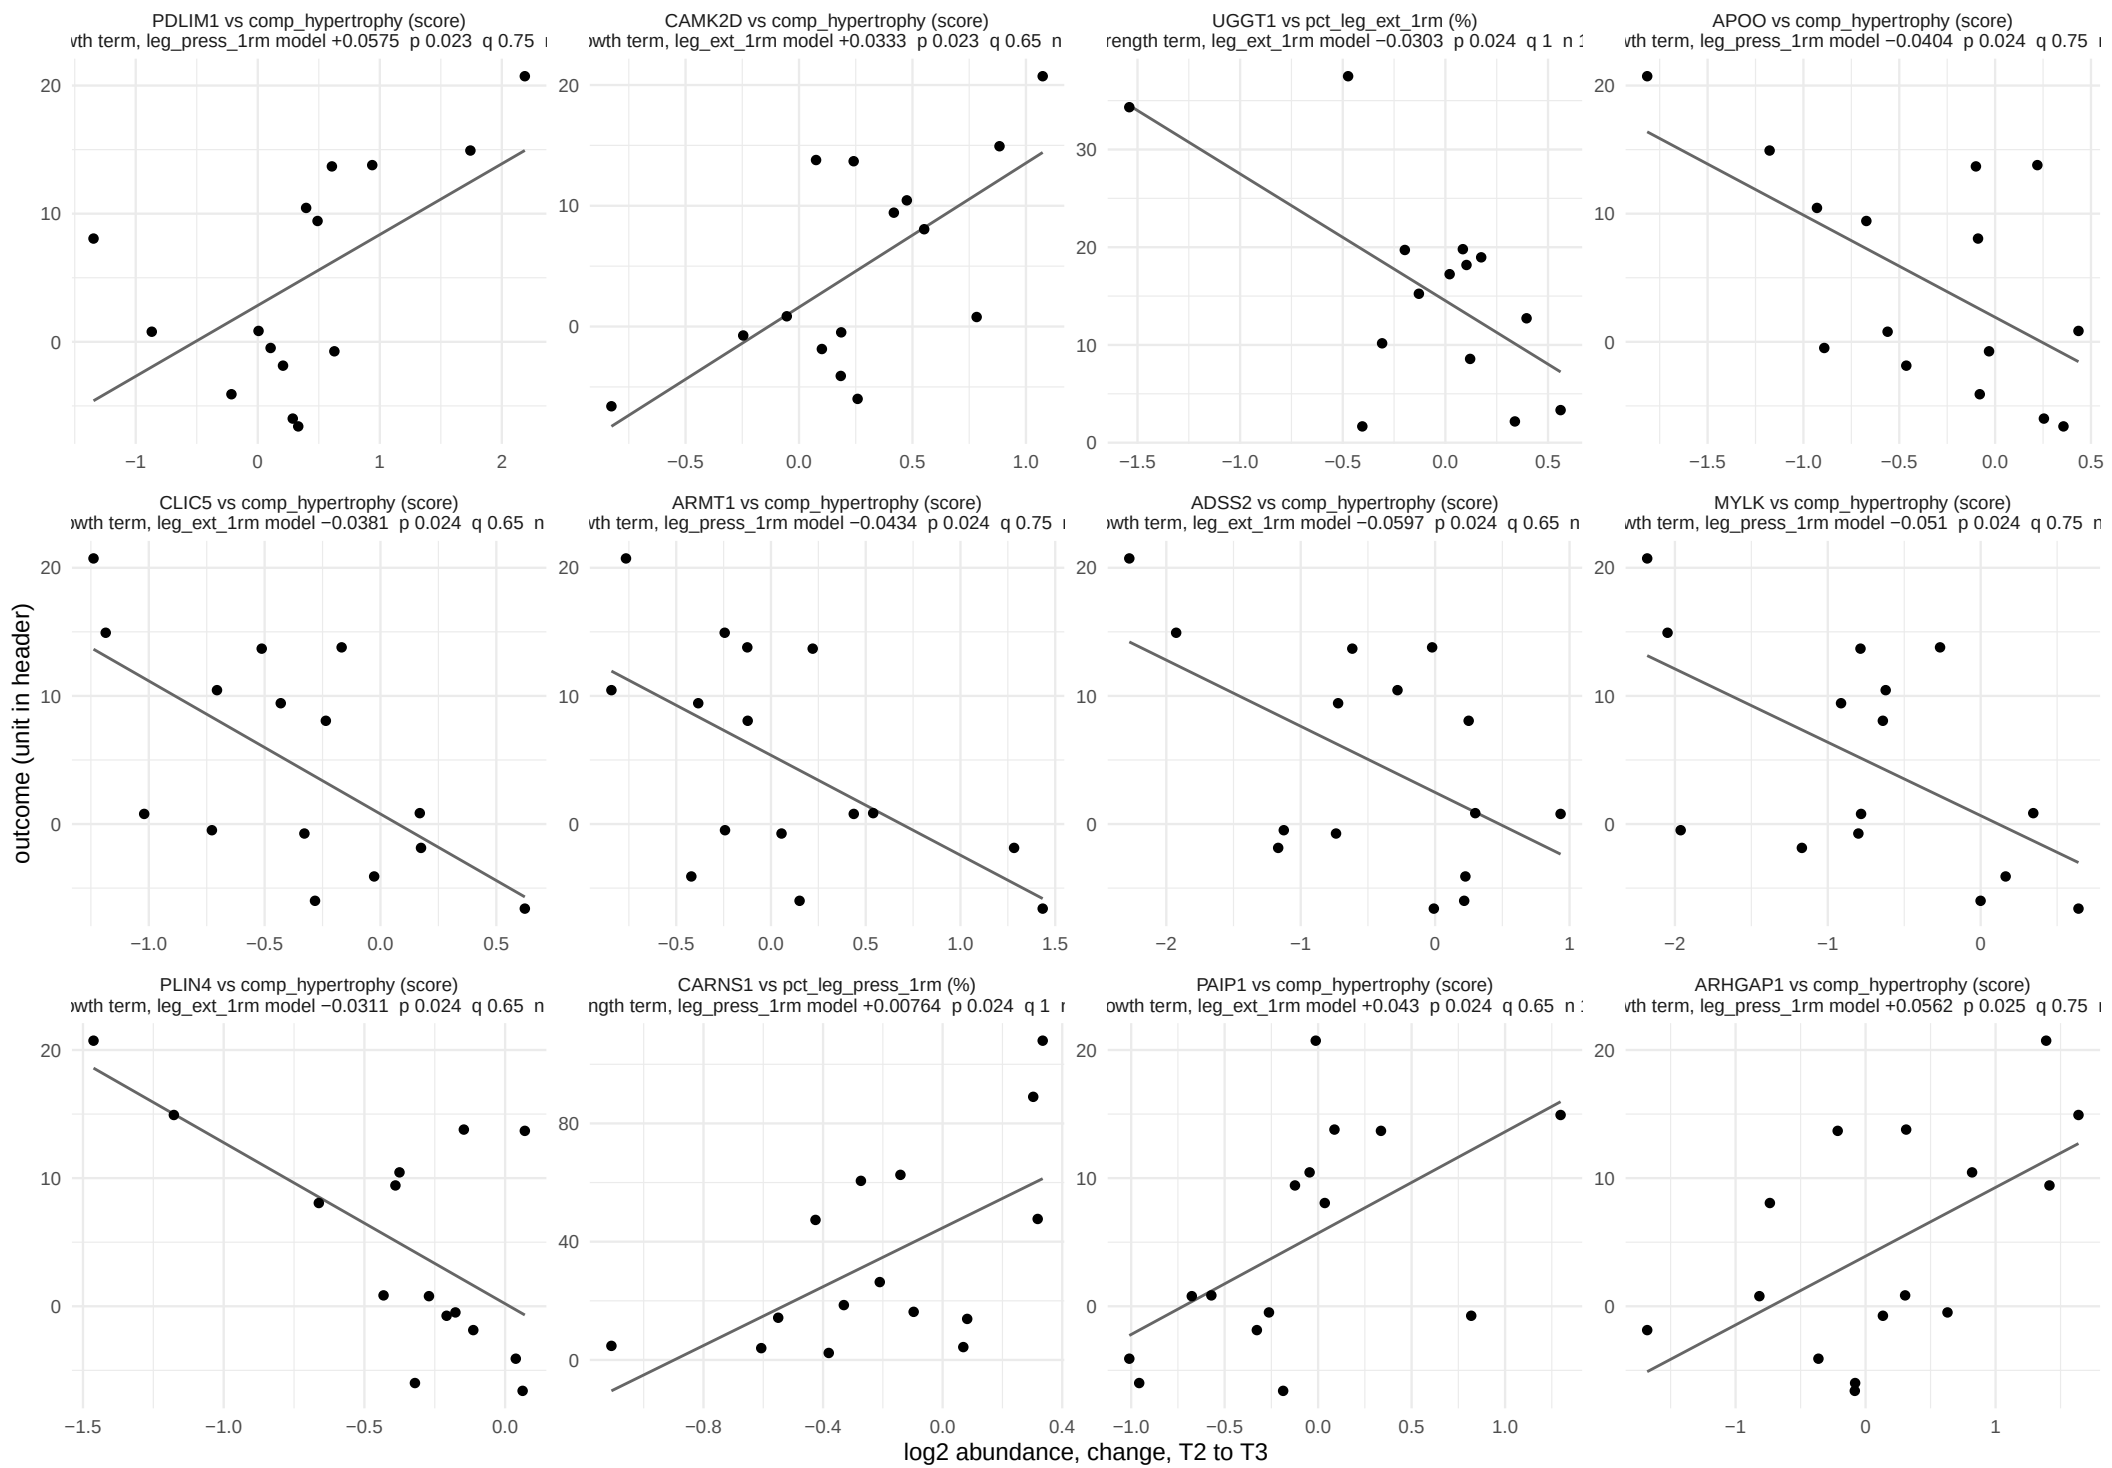

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/01_proteins.xlsx, two_predictor.


Two predictor, acute window

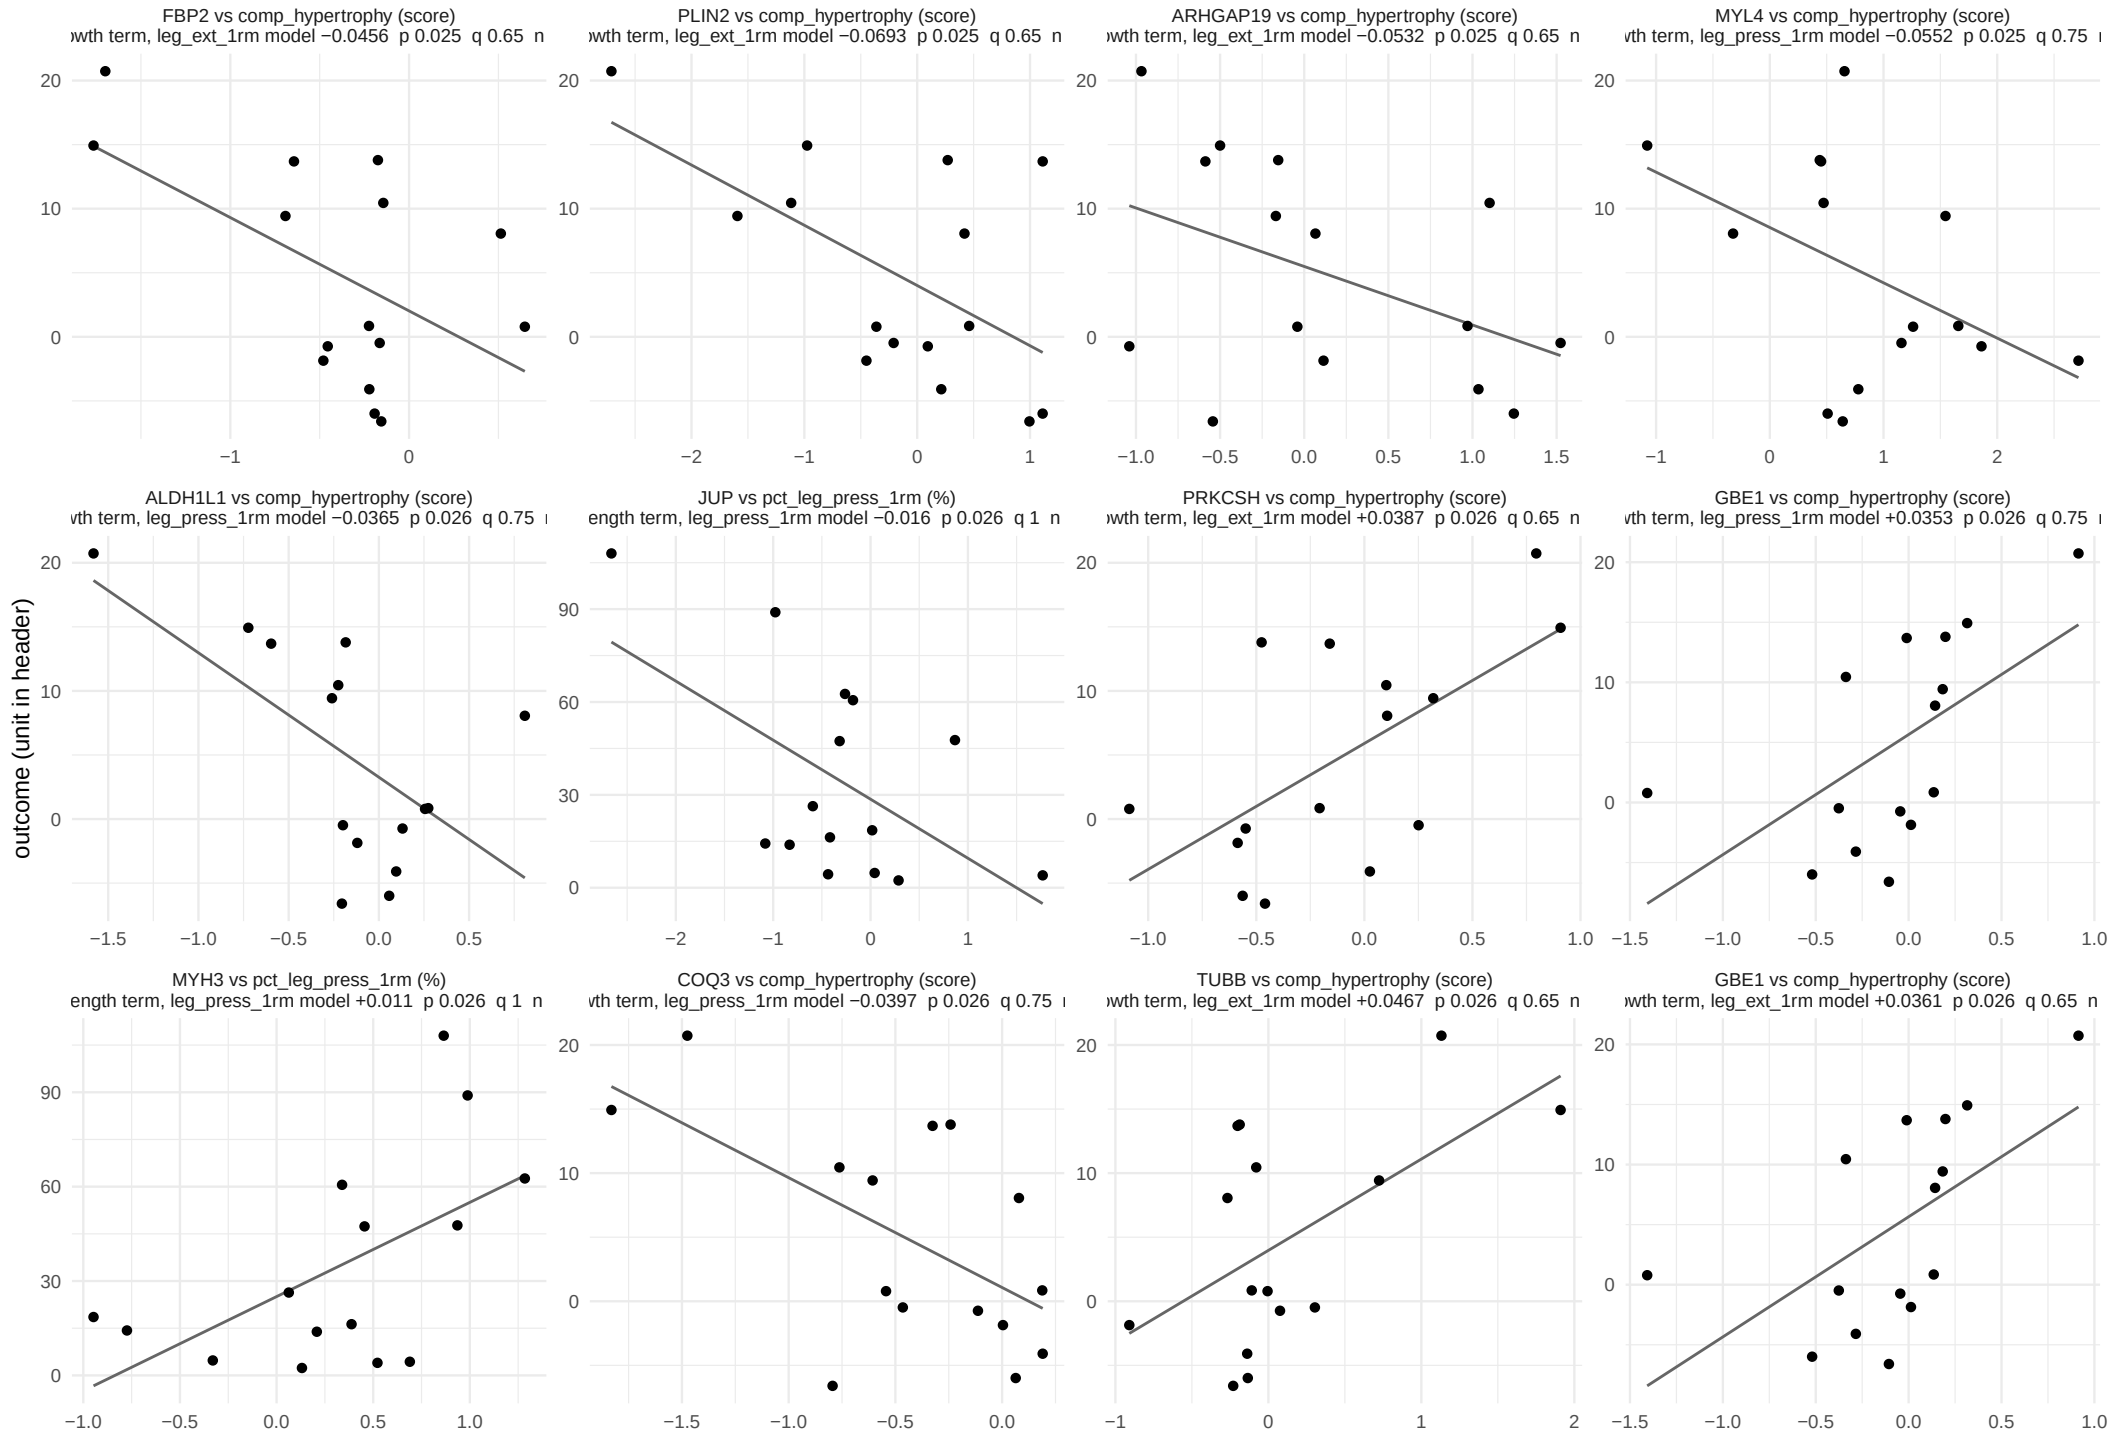

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/01_proteins.xlsx, two_predictor.

Two predictor, acute window


324 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 15 of 27.

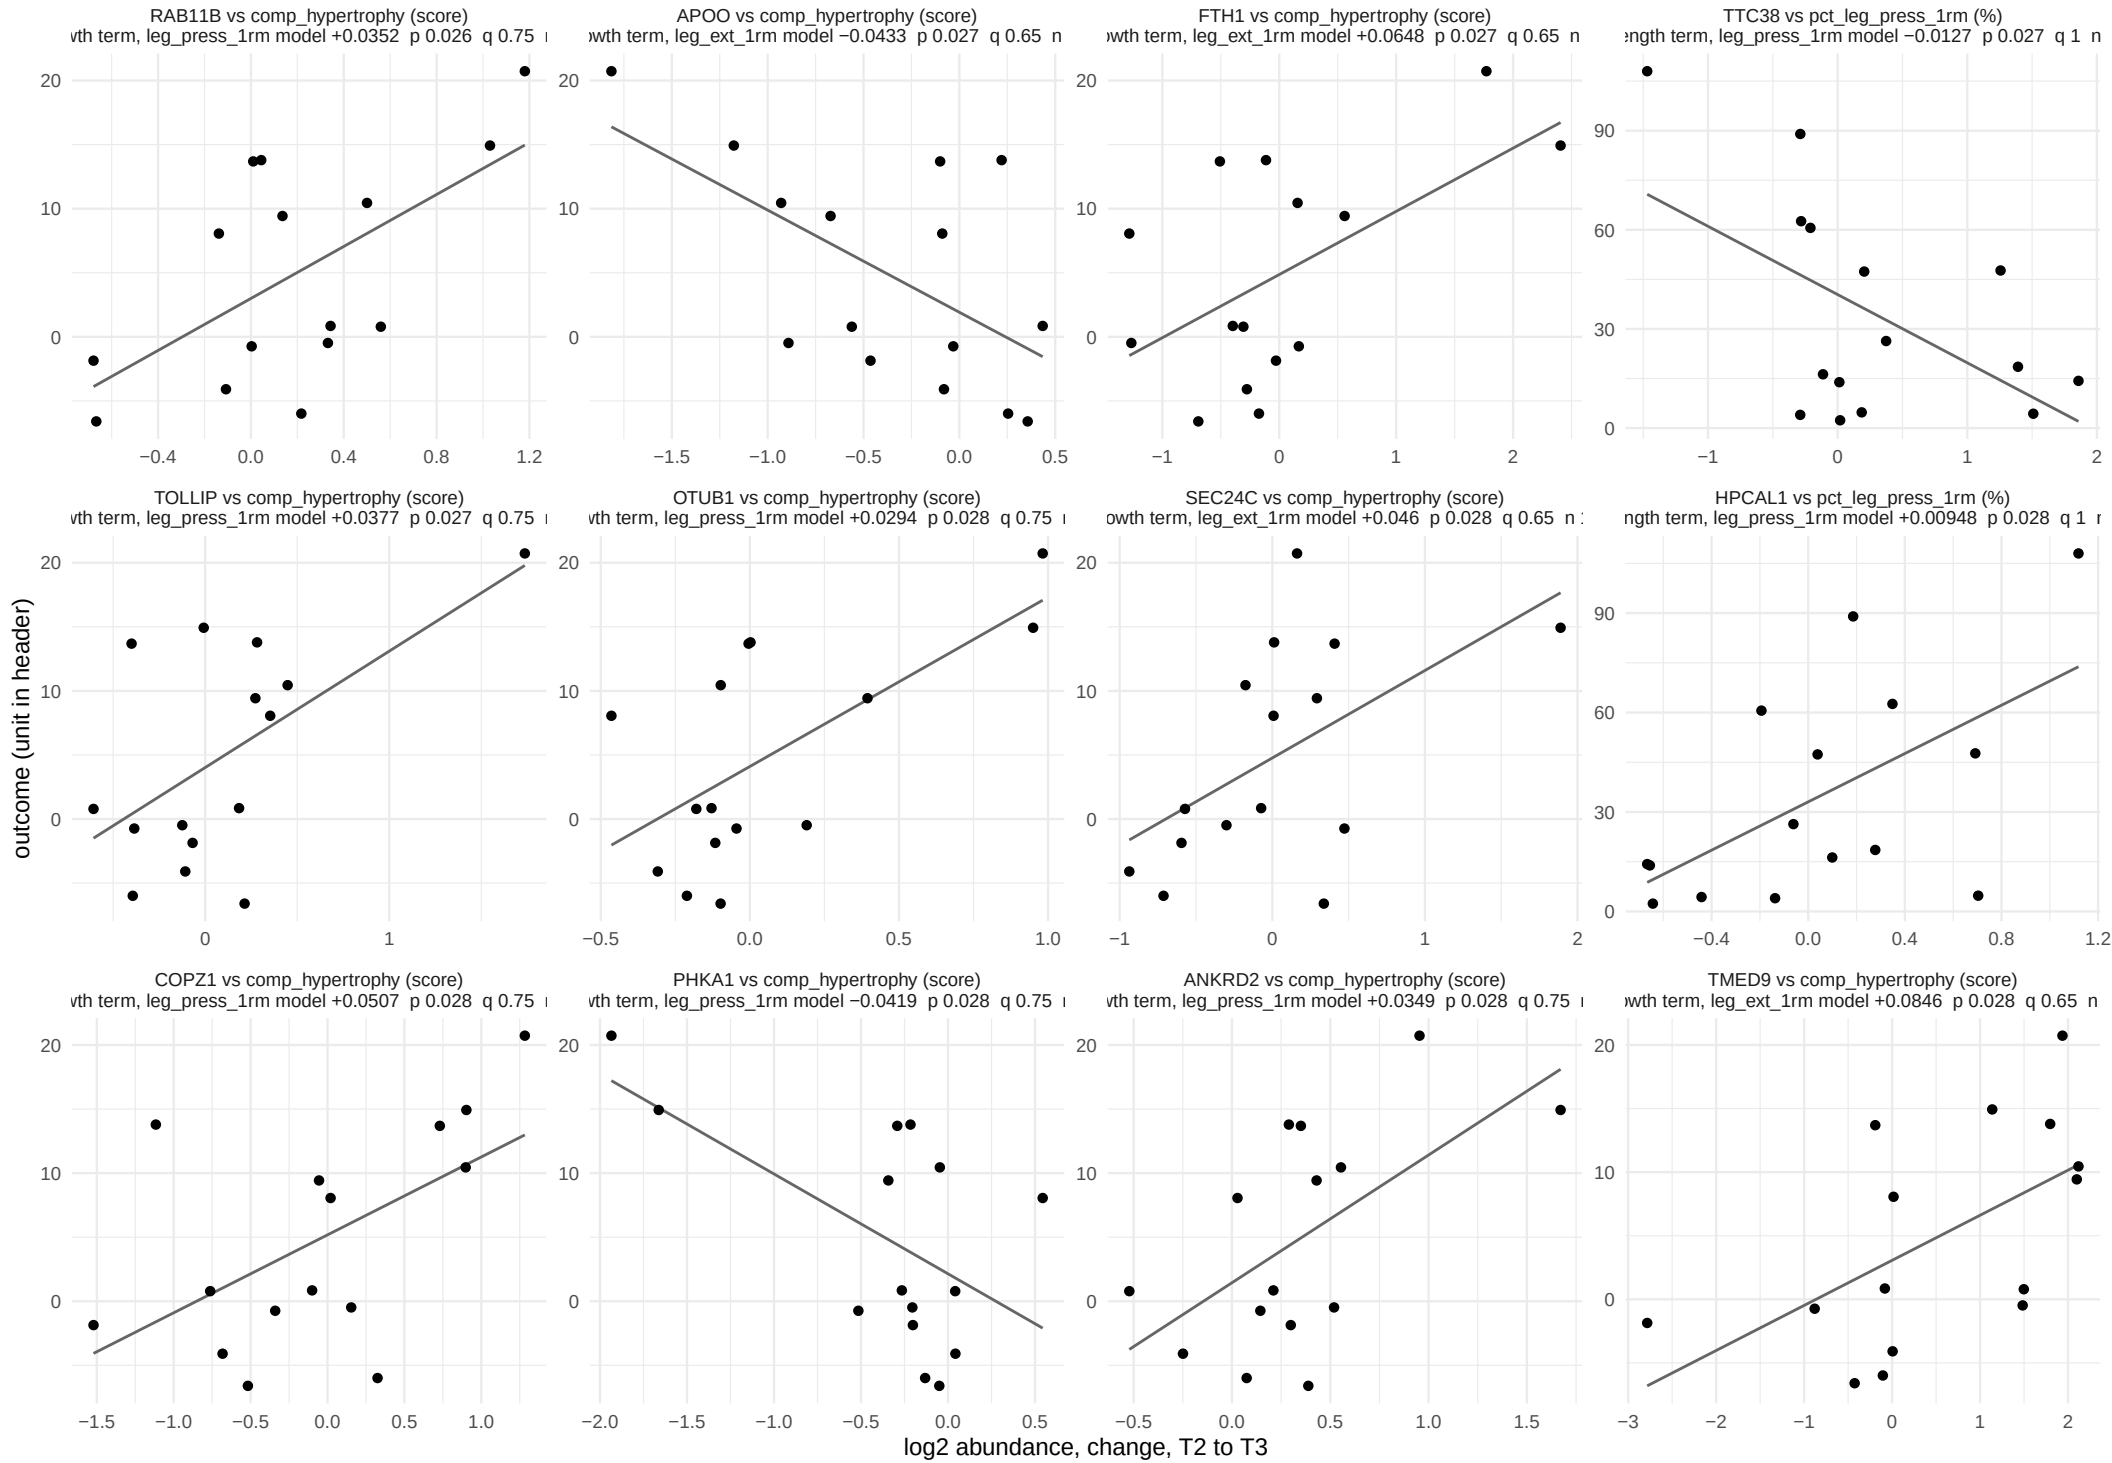

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/01_proteins.xlsx, two_predictor.

Two predictor, acute window


324 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 16 of 27.

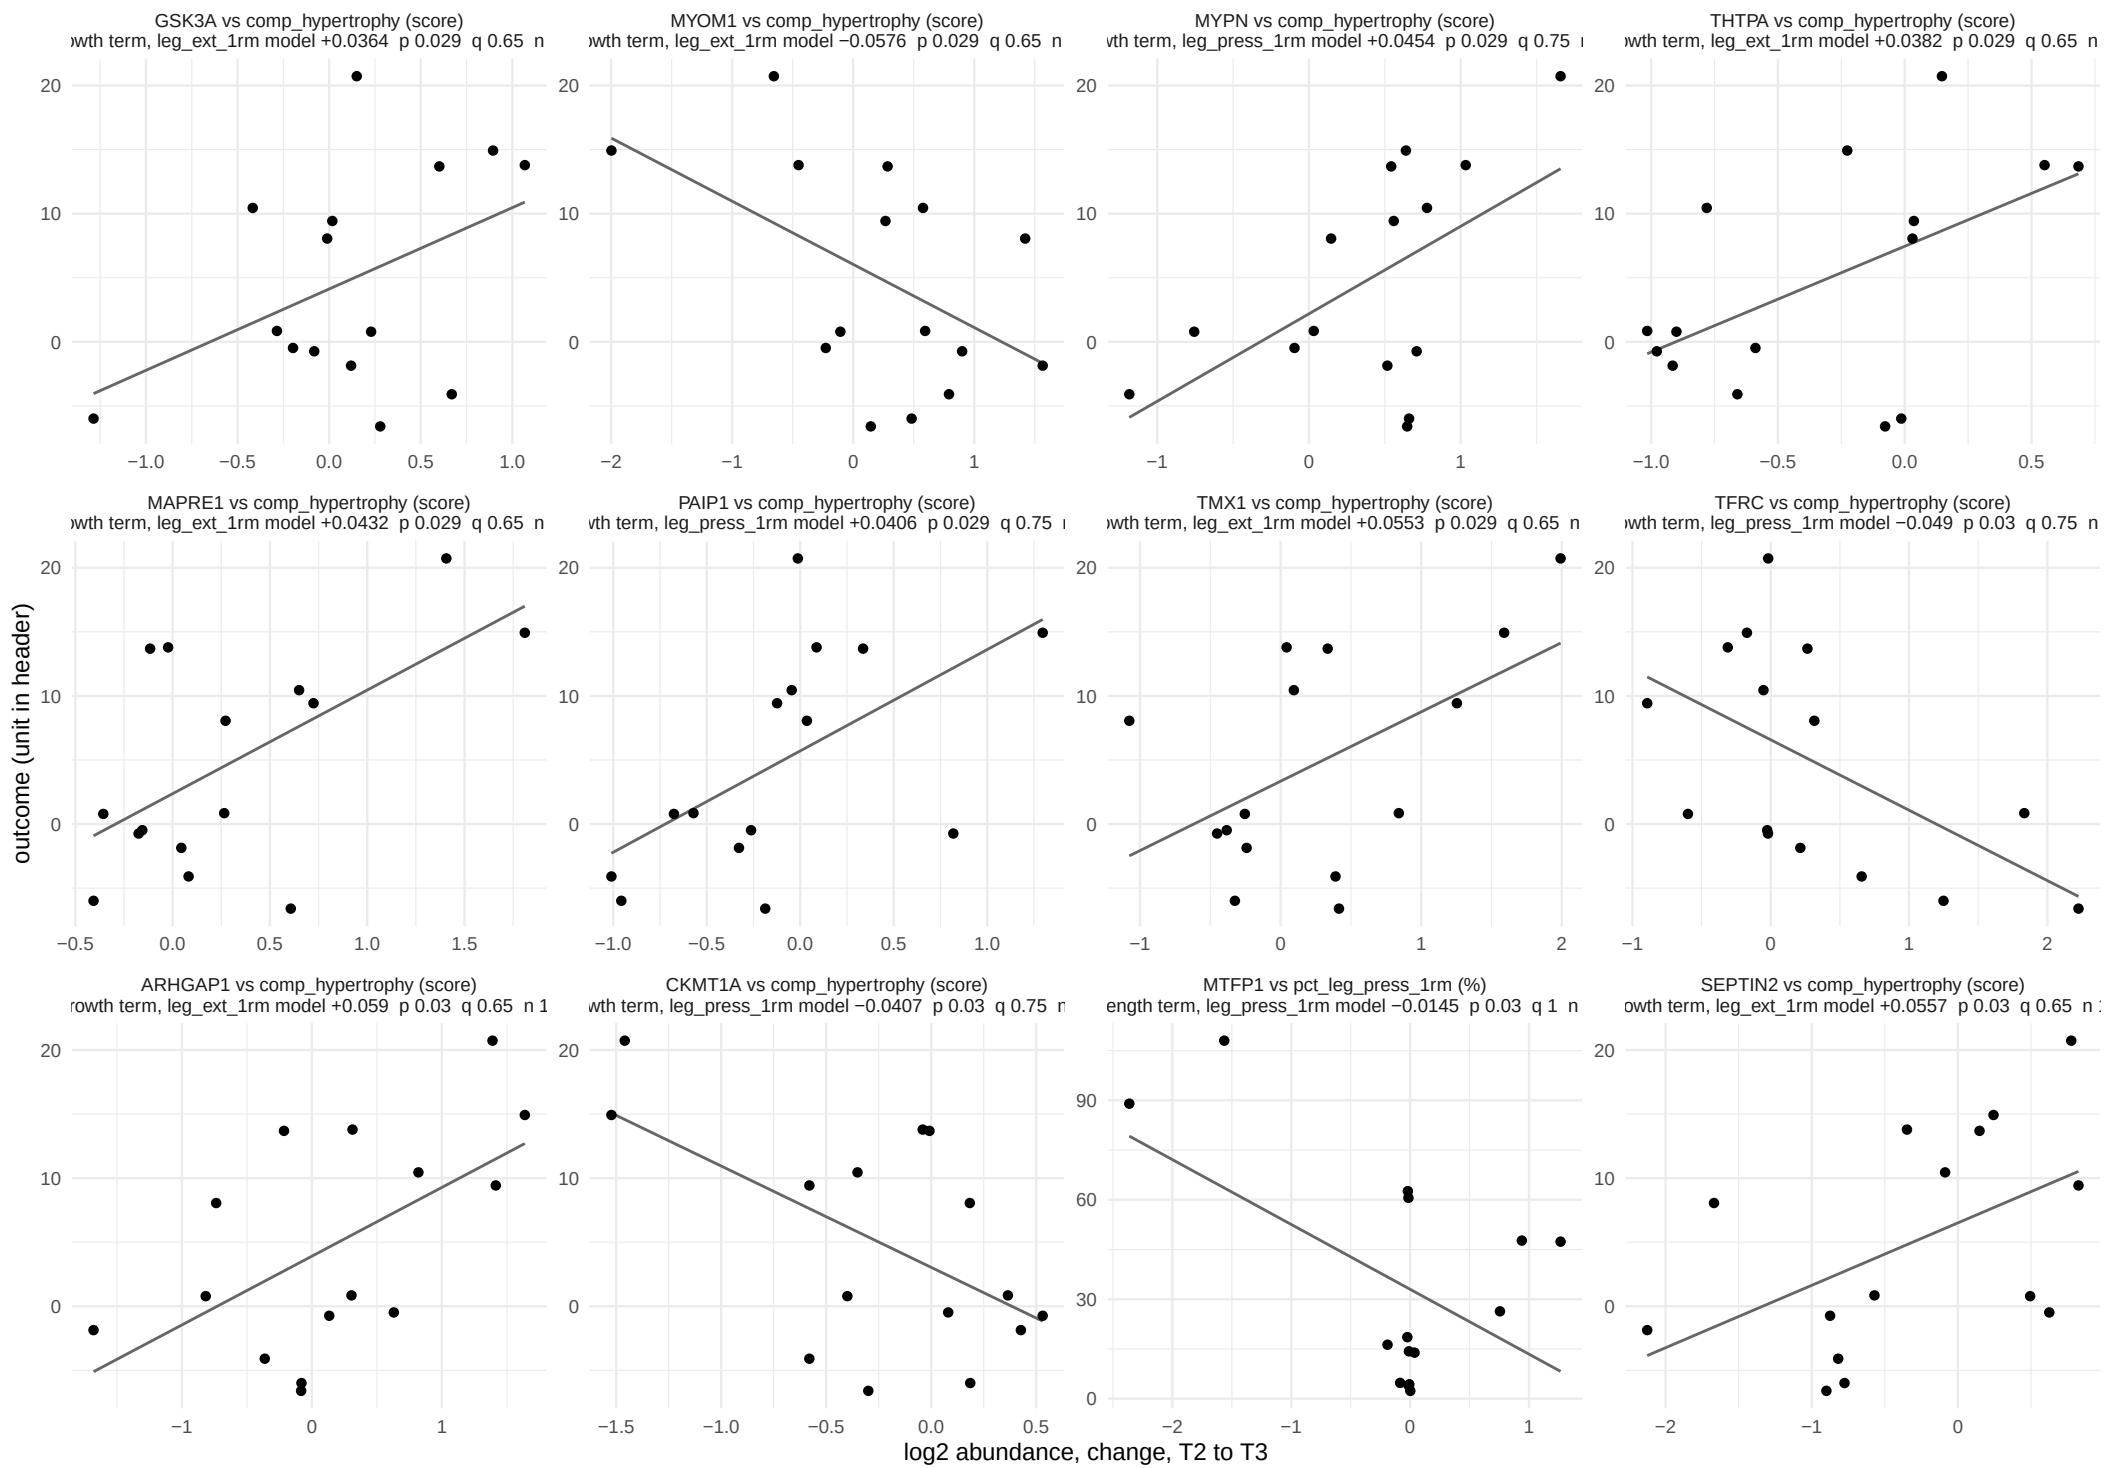

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/01_proteins.xlsx, two_predictor.

Two predictor, acute window


324 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 17 of 27.

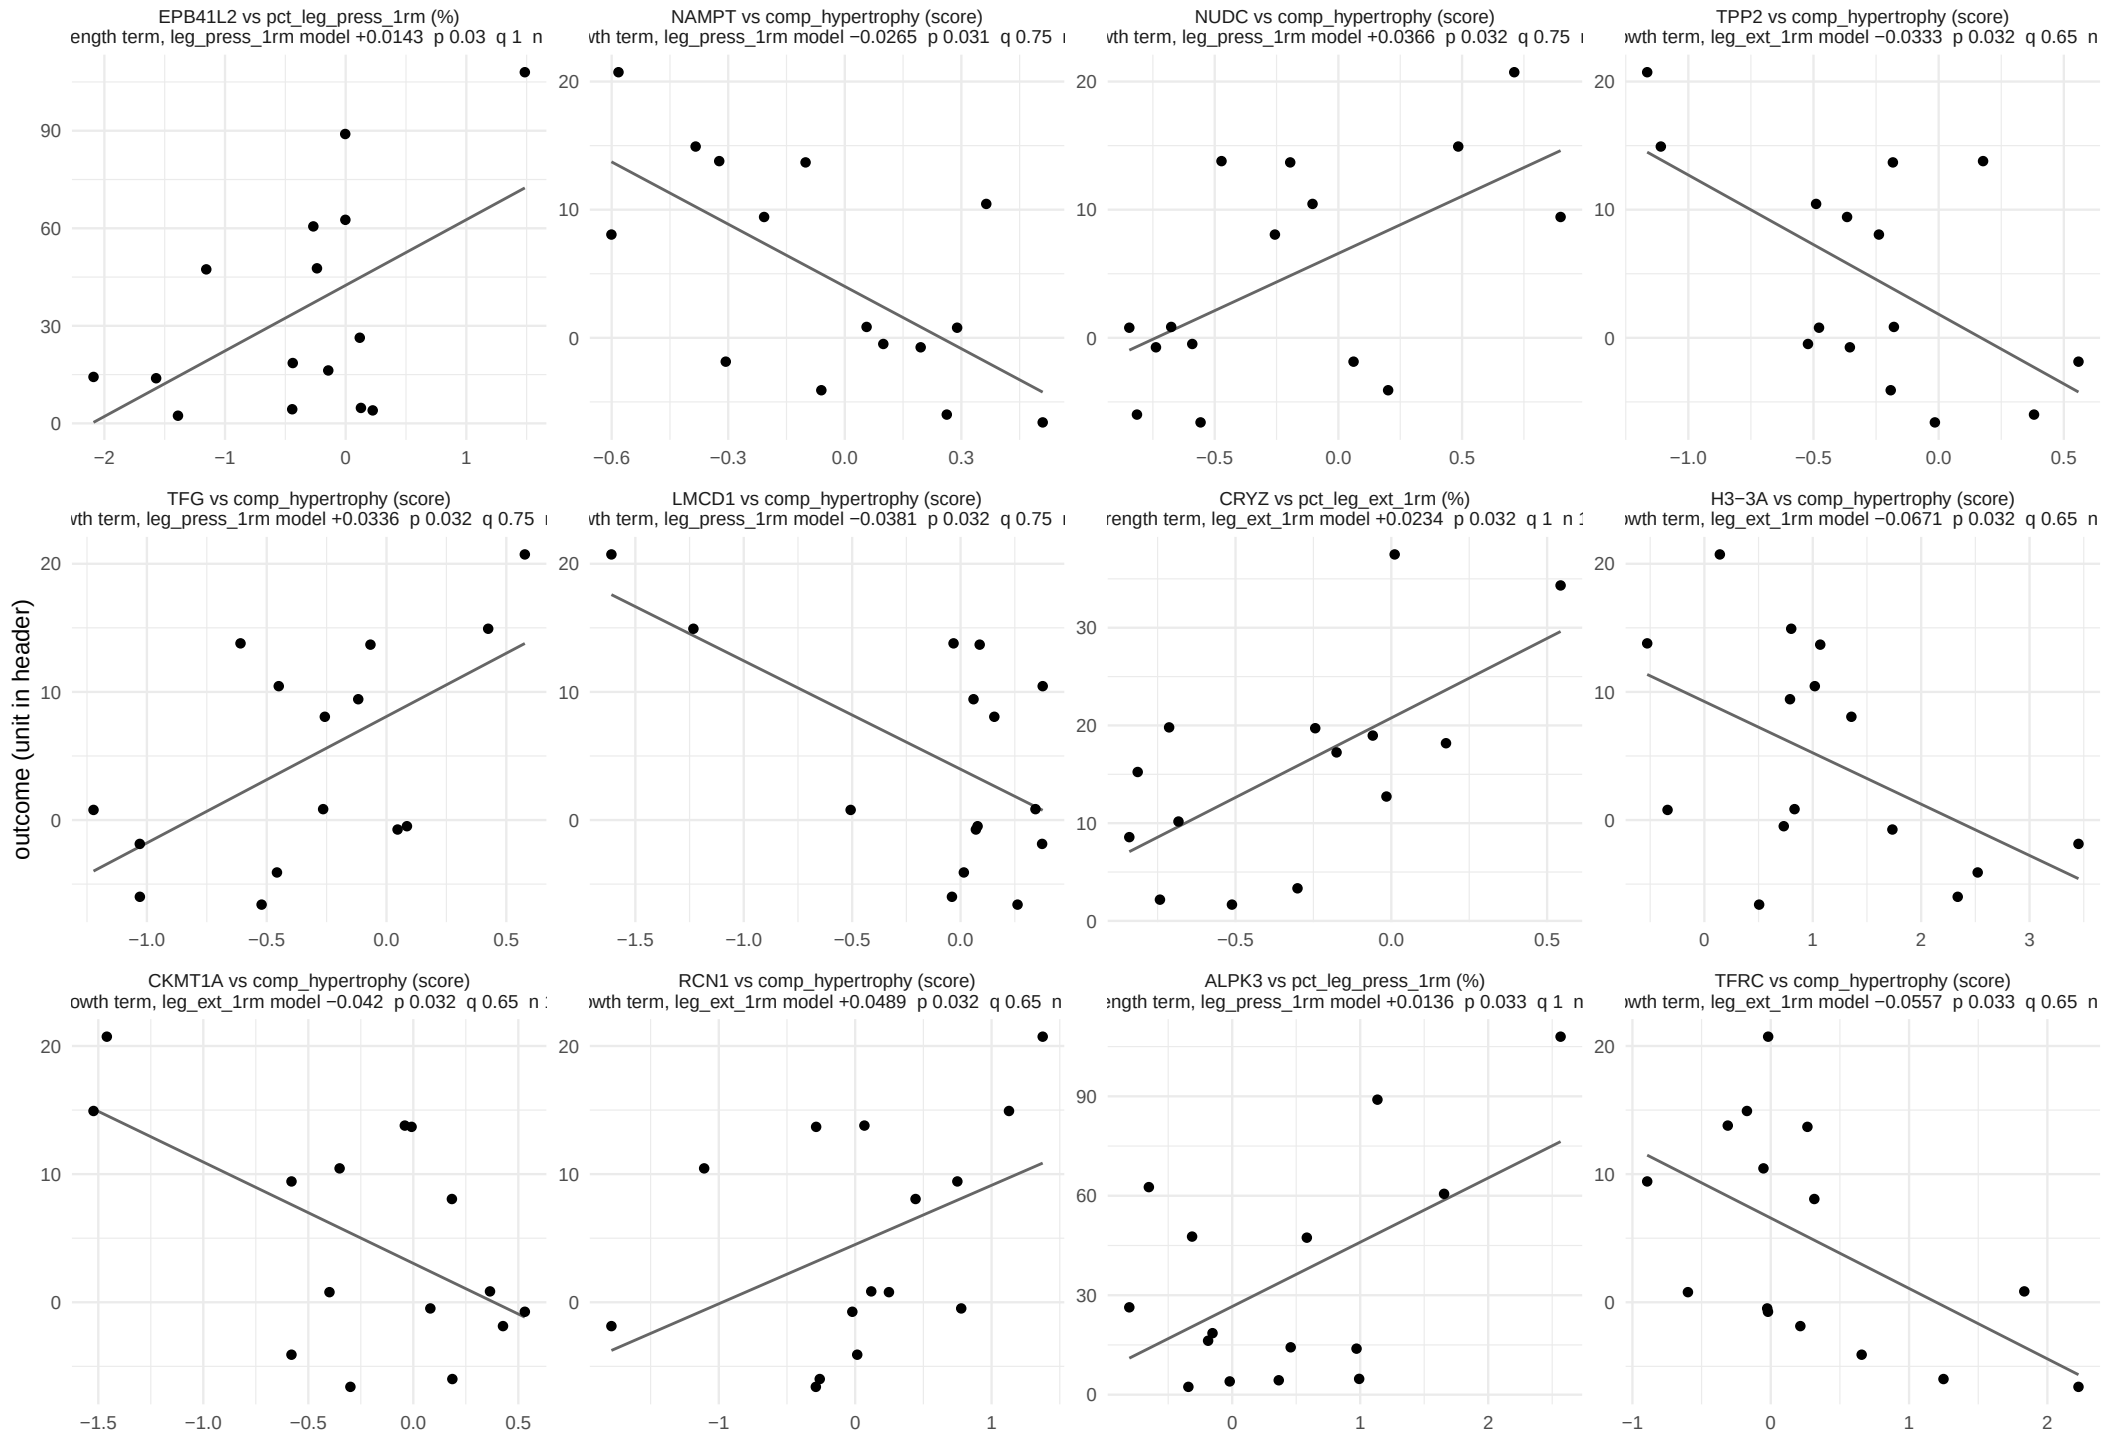

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/01_proteins.xlsx, two_predictor.

Two predictor, acute window


324 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 18 of 27.

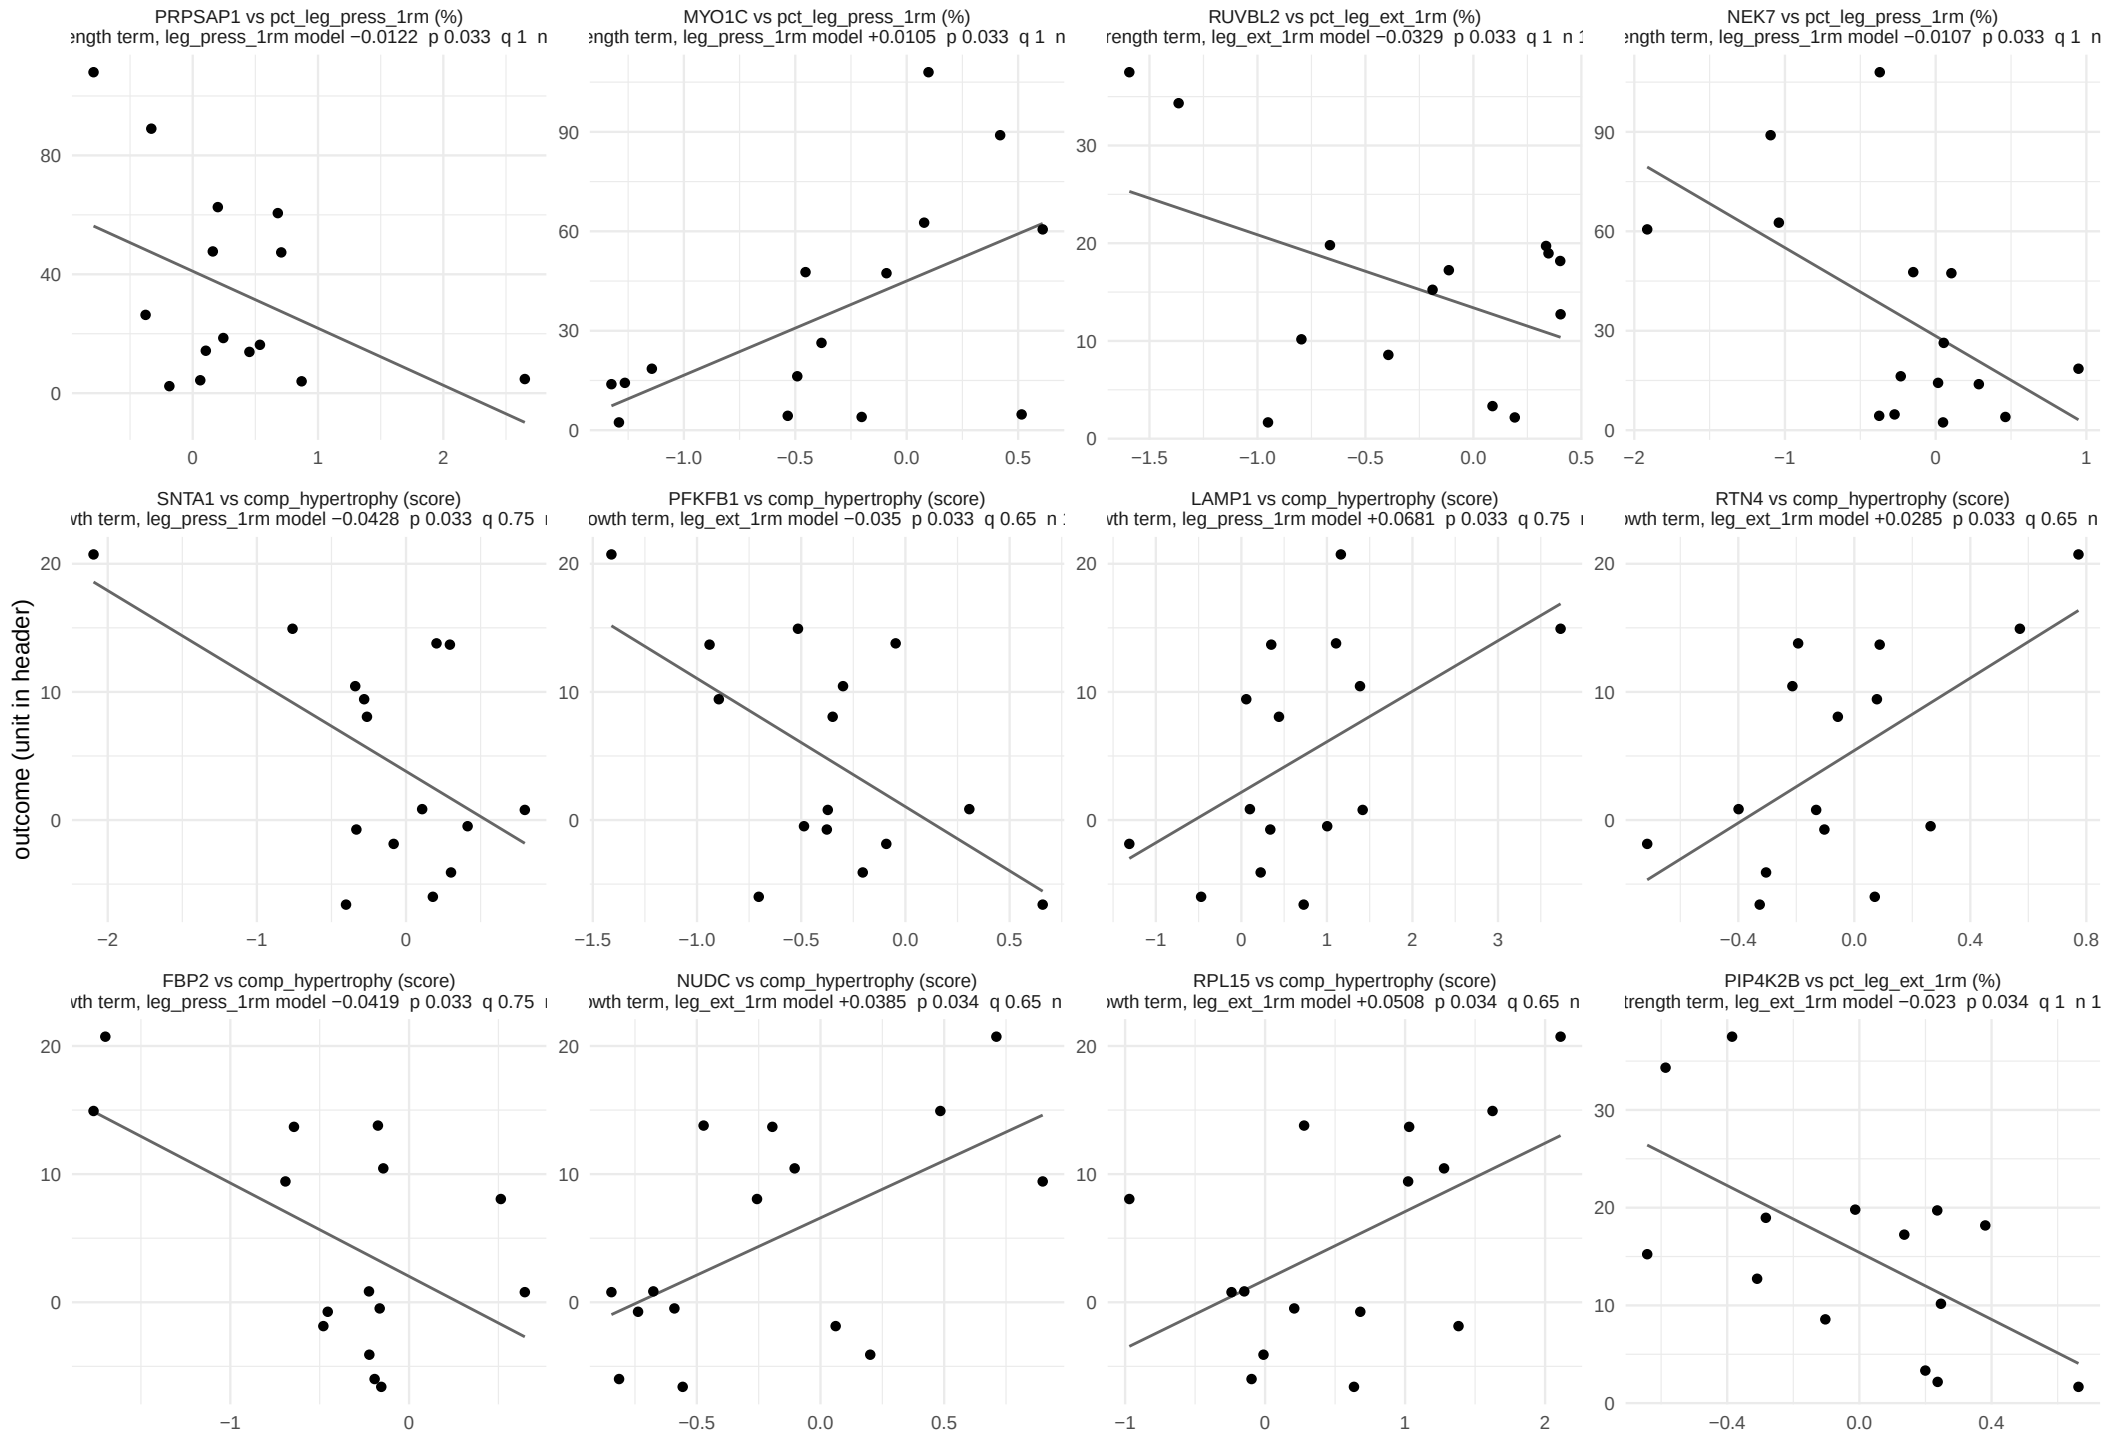

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/01_proteins.xlsx, two_predictor.

Two predictor, acute window


324 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 19 of 27.

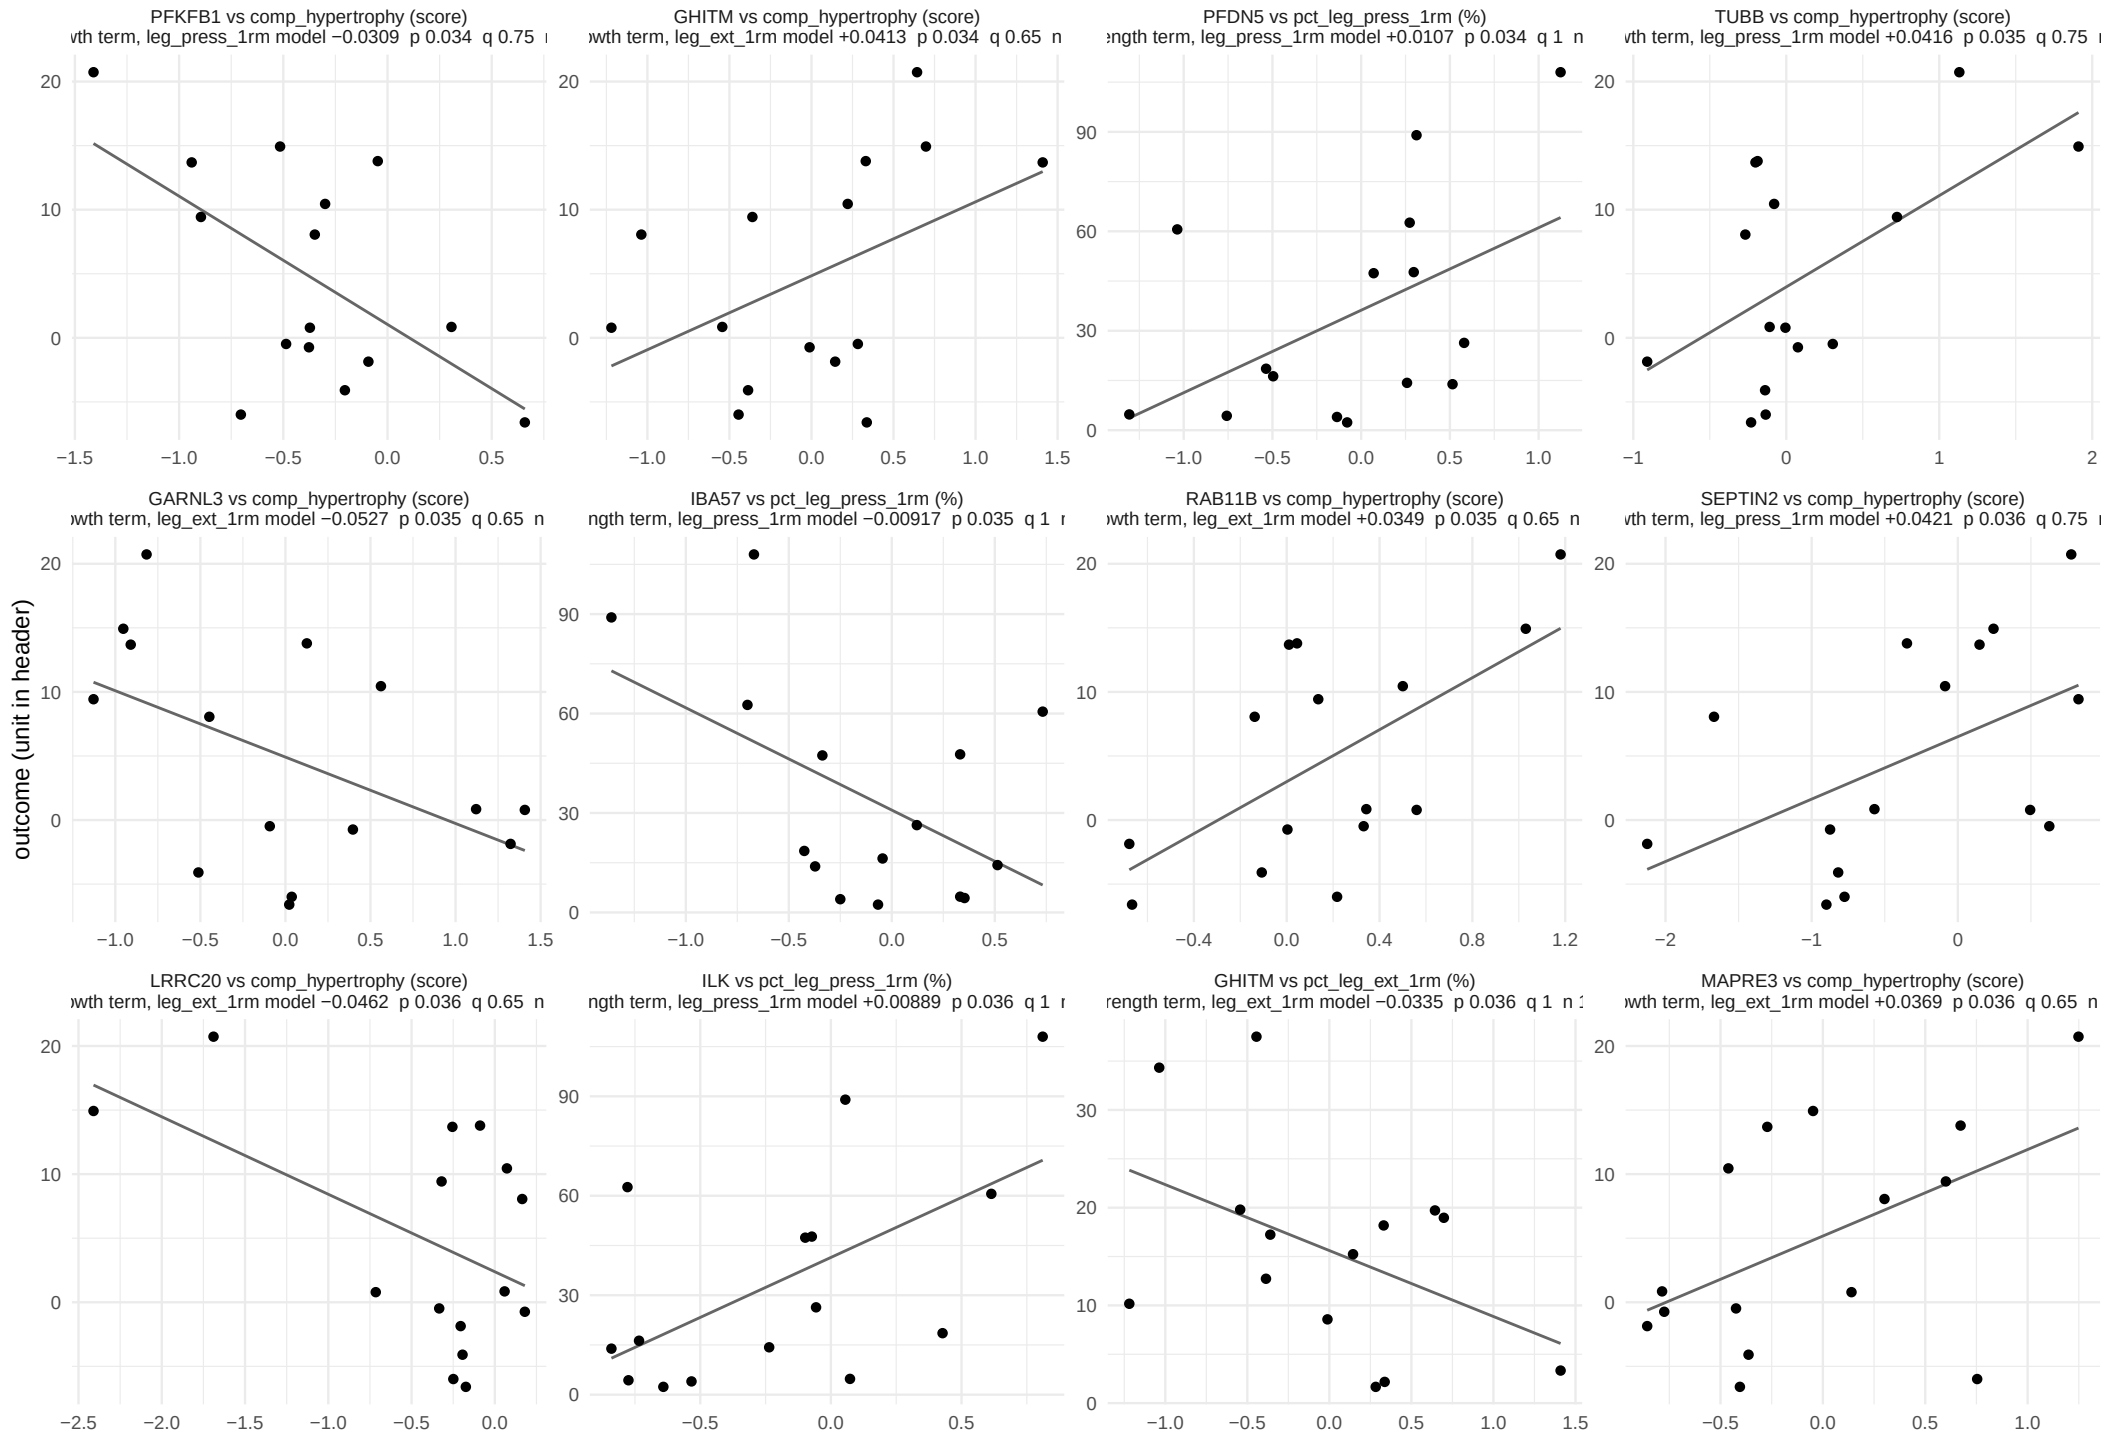

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/01_proteins.xlsx, two_predictor.

Two predictor, acute window


324 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 20 of 27.

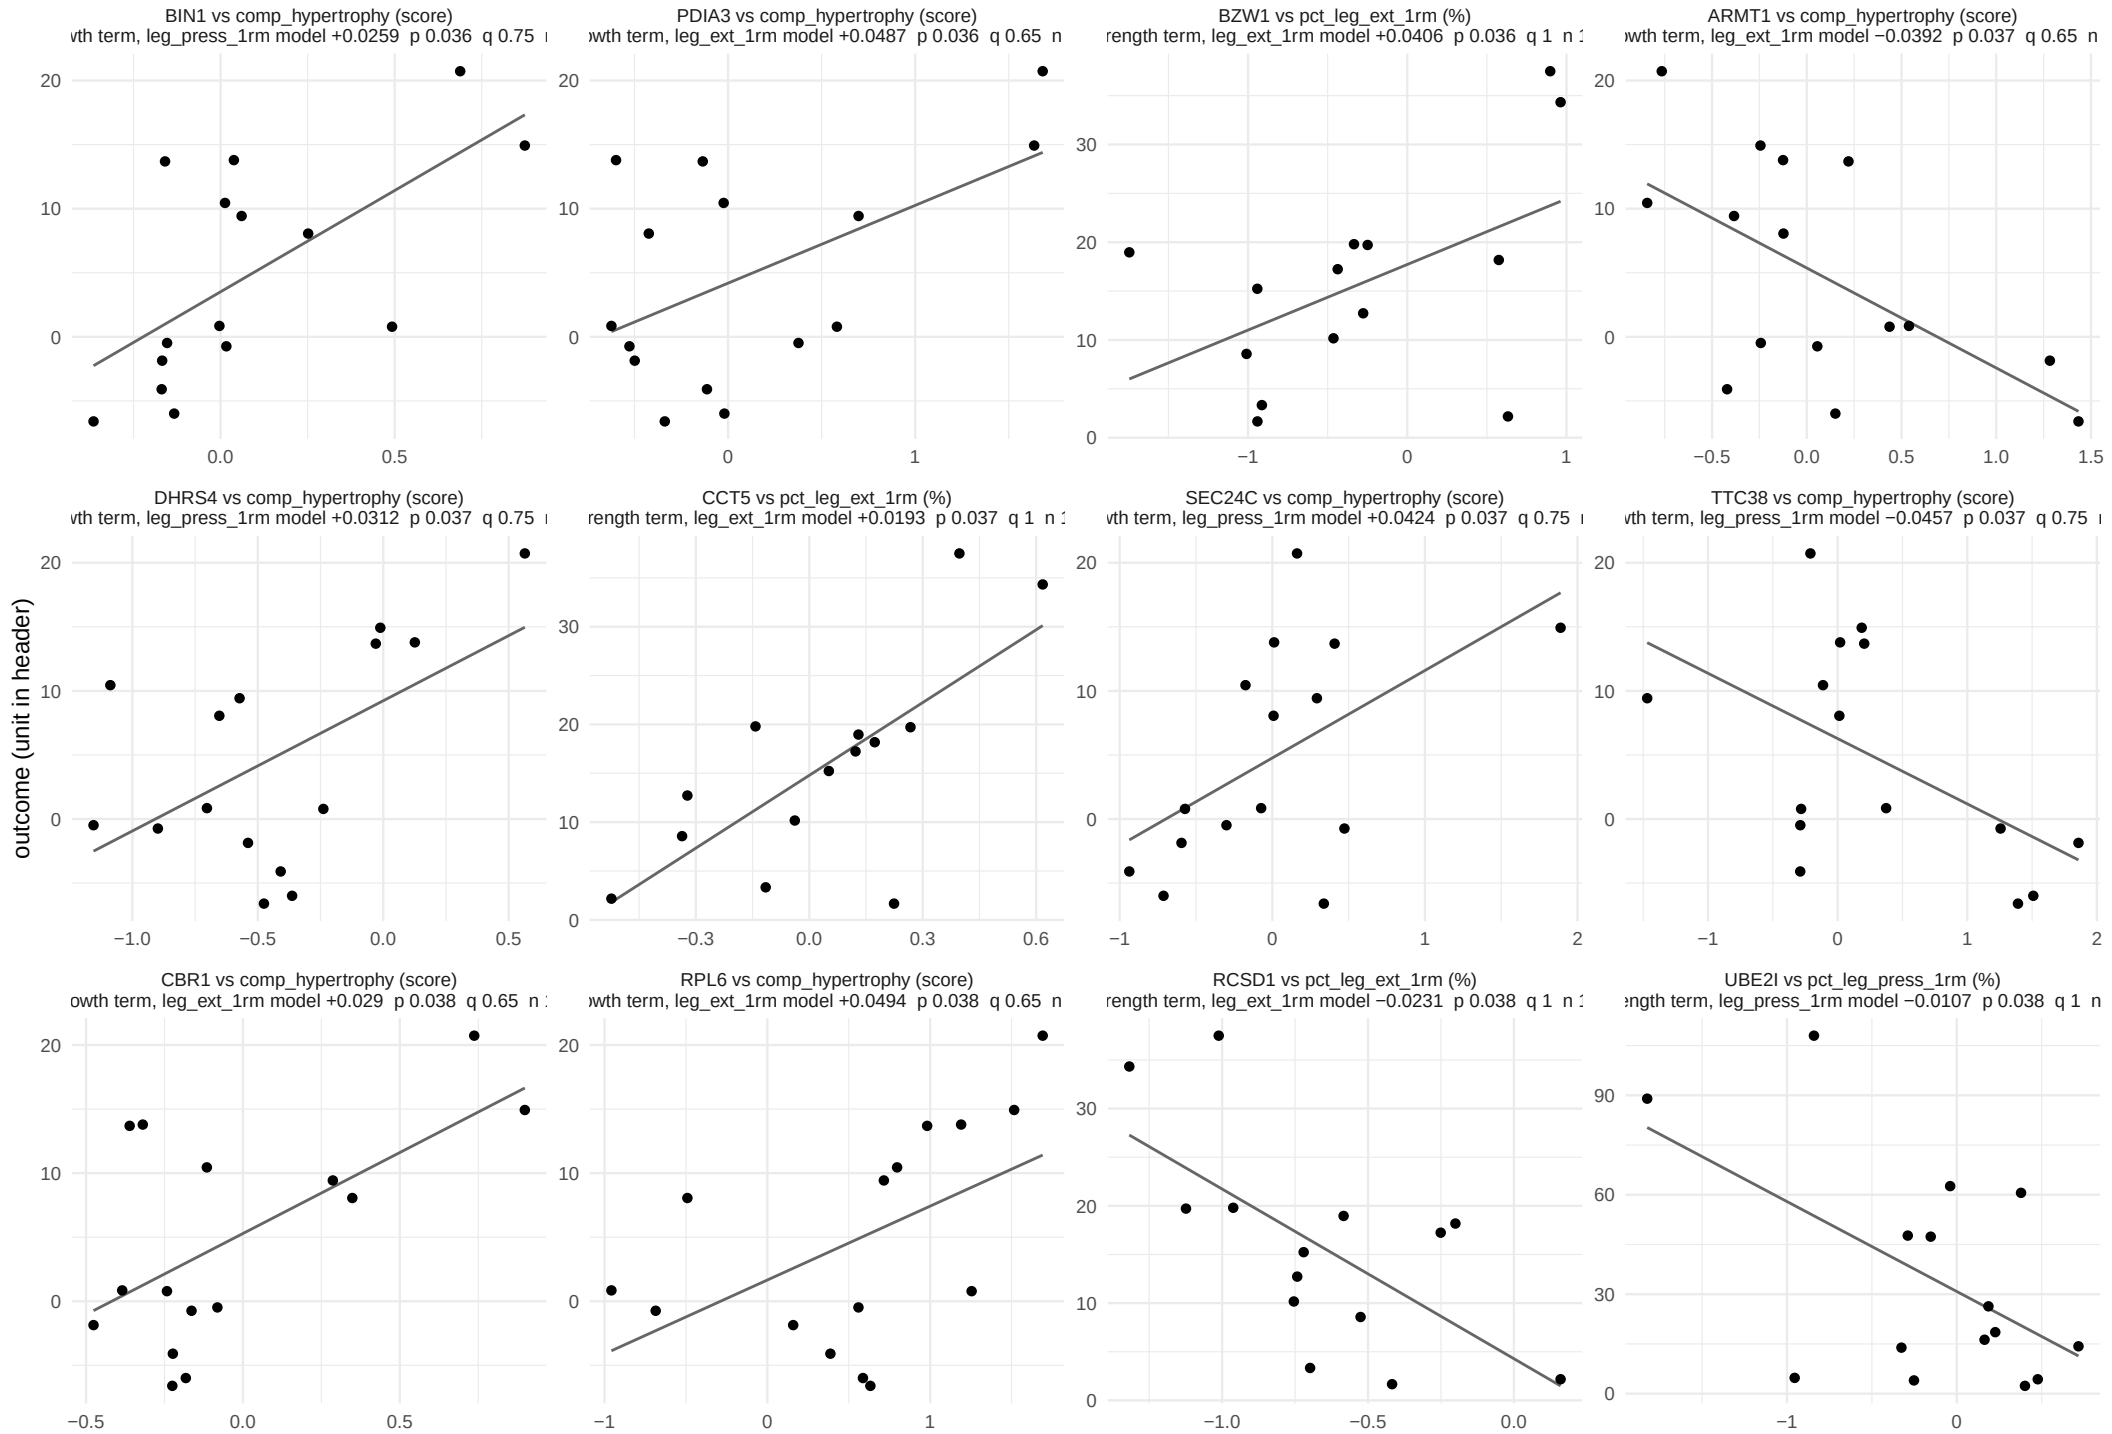

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/01_proteins.xlsx, two_predictor.

Two predictor, acute window


324 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 21 of 27.

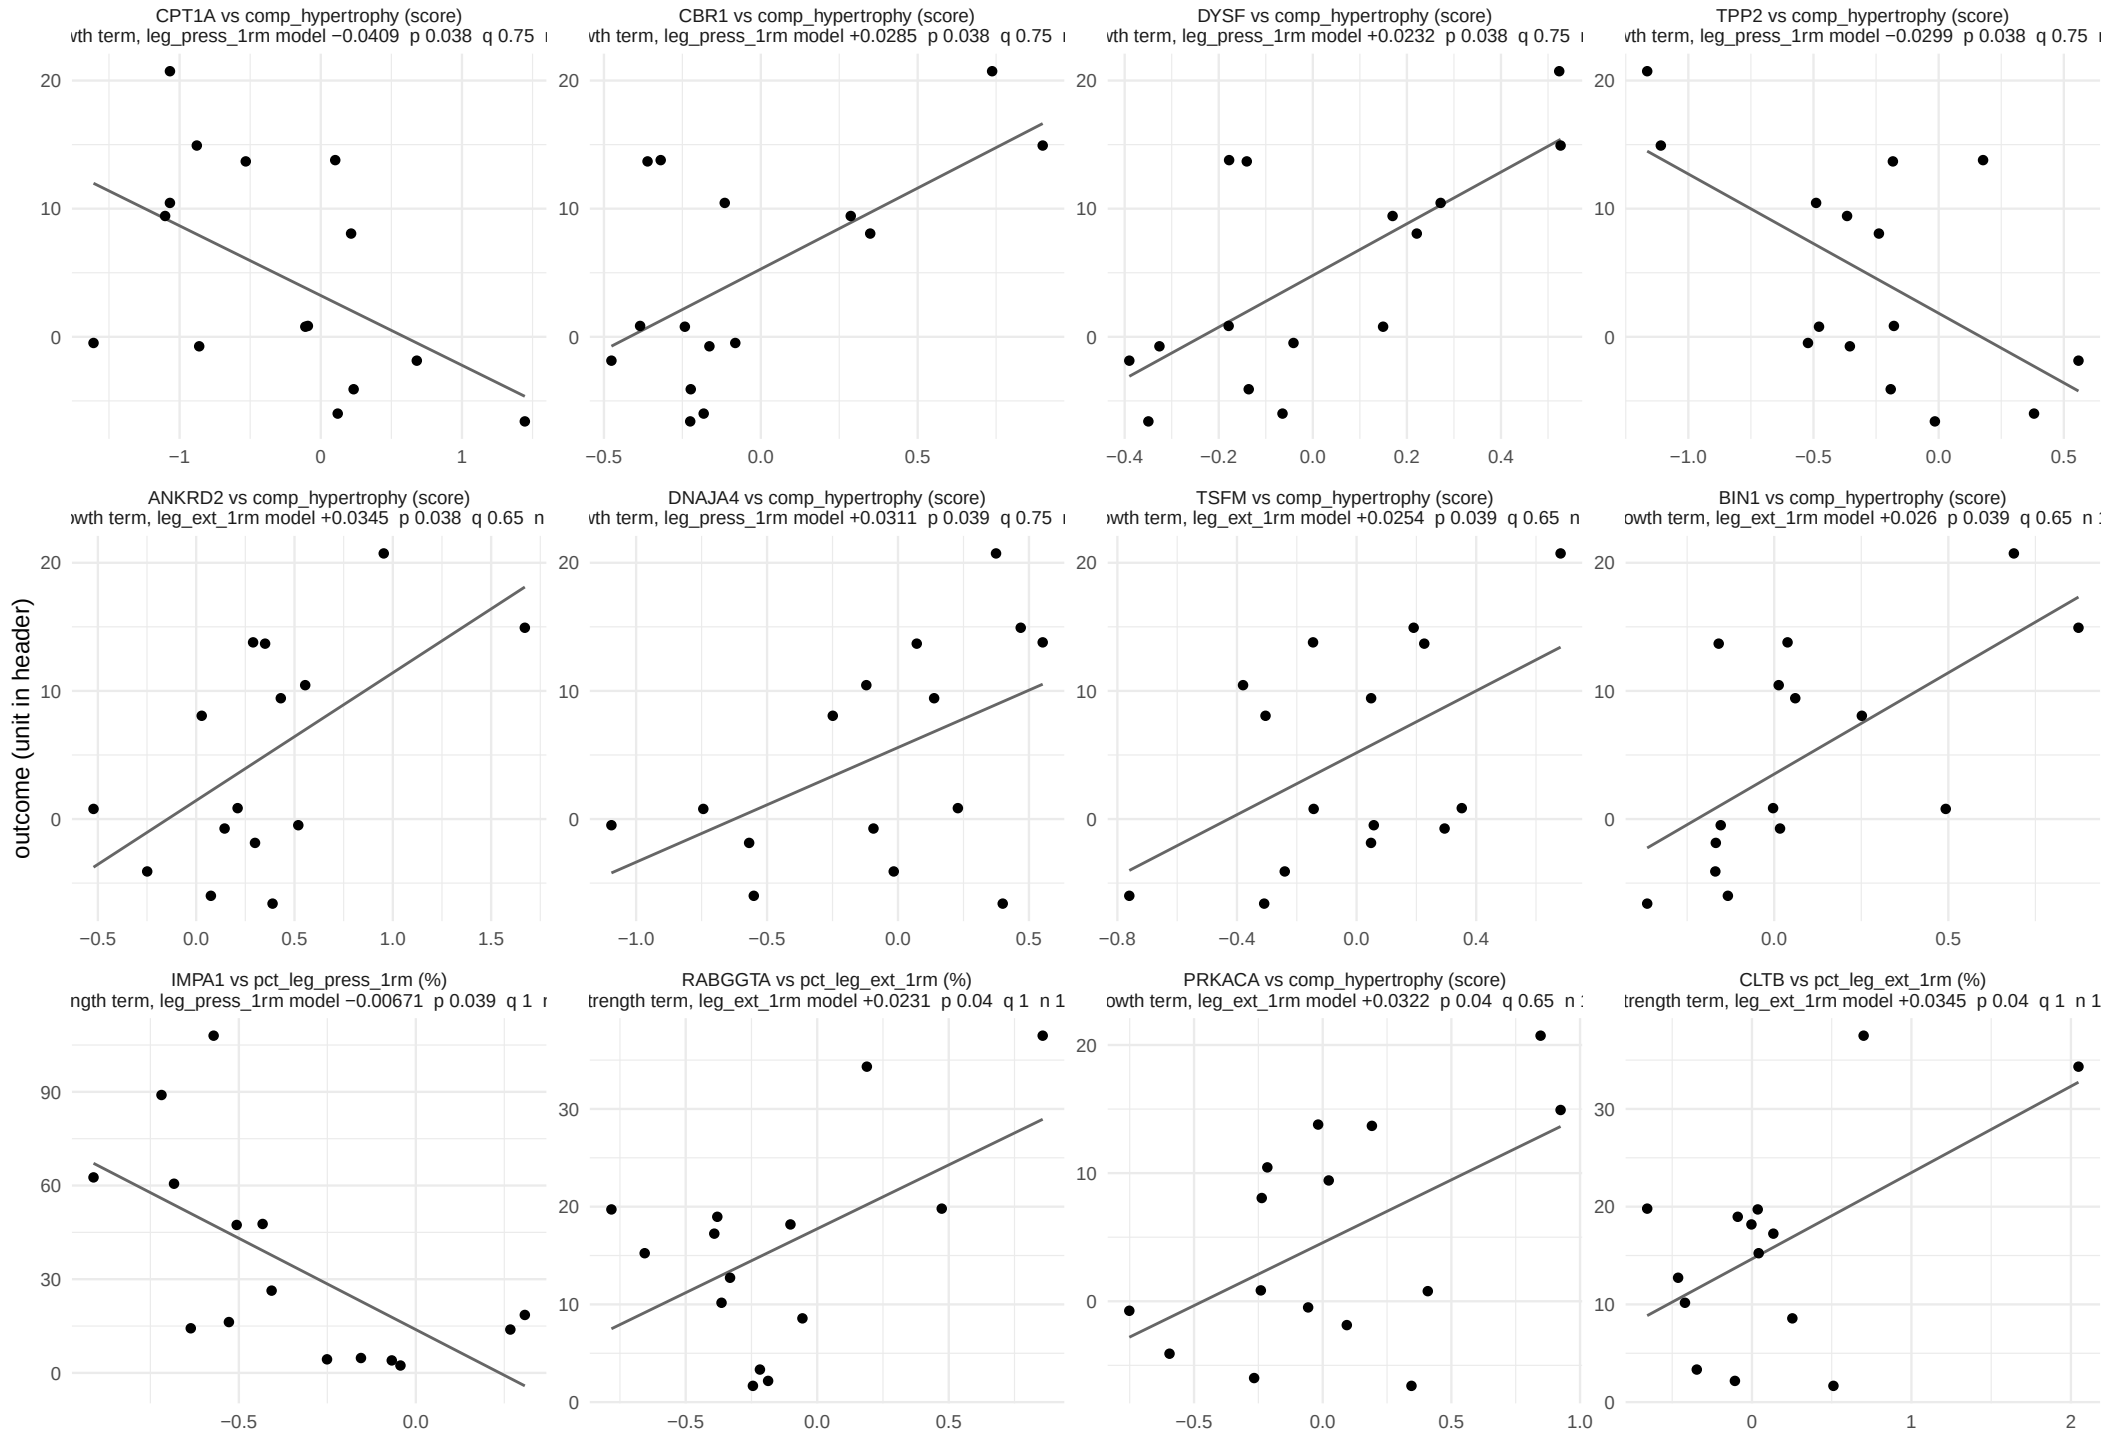

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/01_proteins.xlsx, two_predictor.

Two predictor, acute window


324 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 22 of 27.

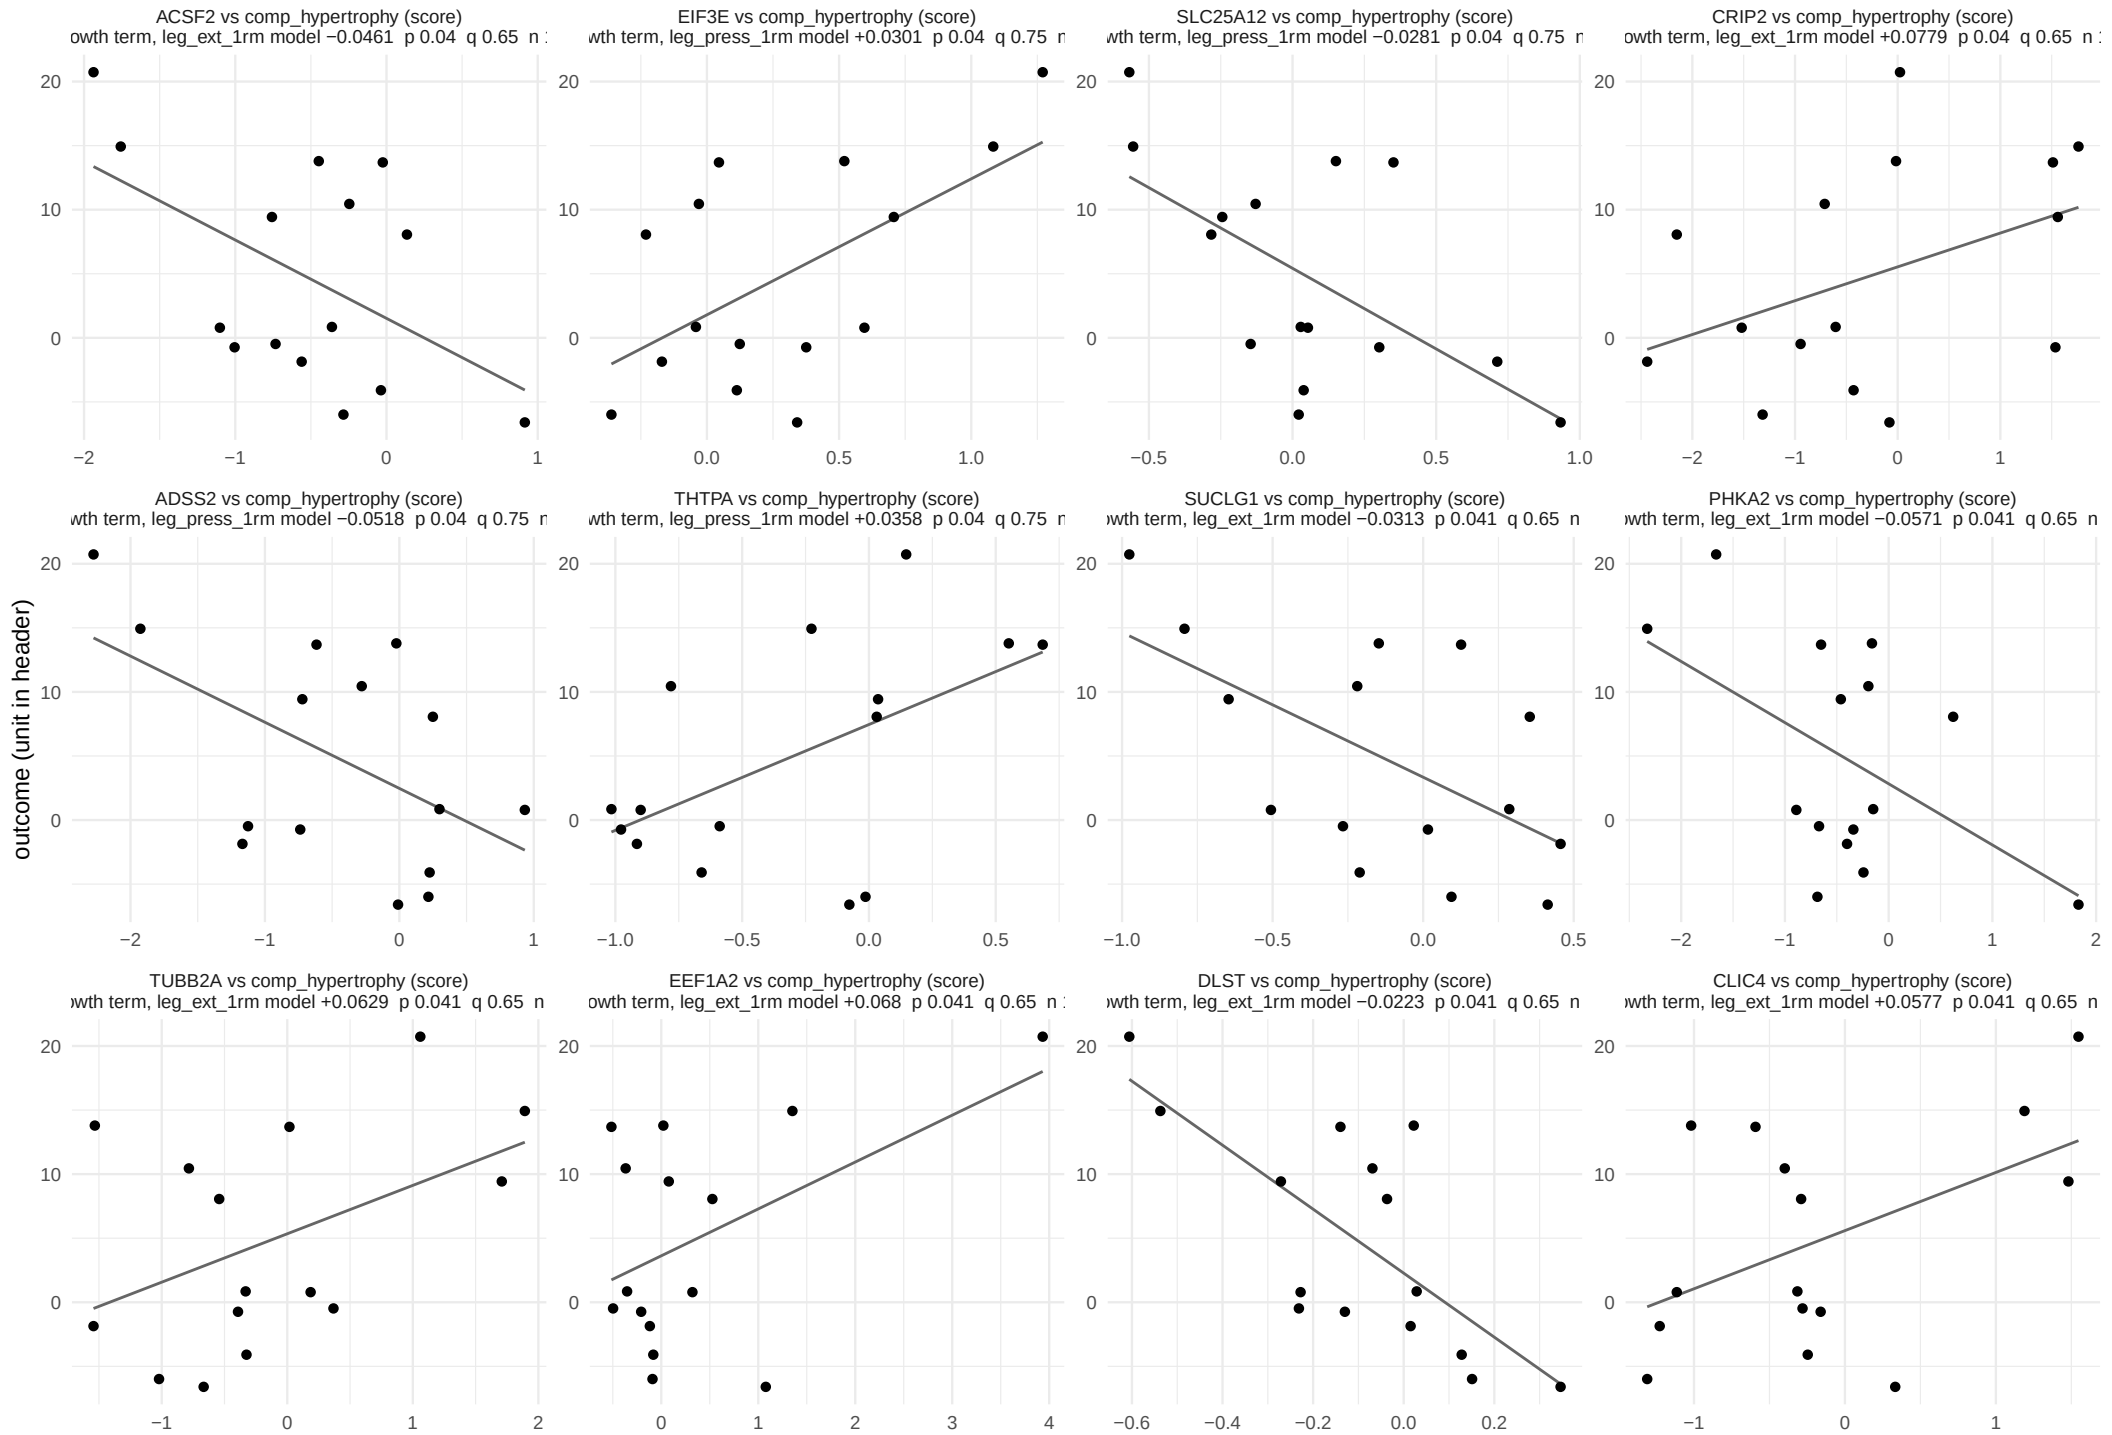

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/01_proteins.xlsx, two_predictor.


Two predictor, acute window

324 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 23 of 27.

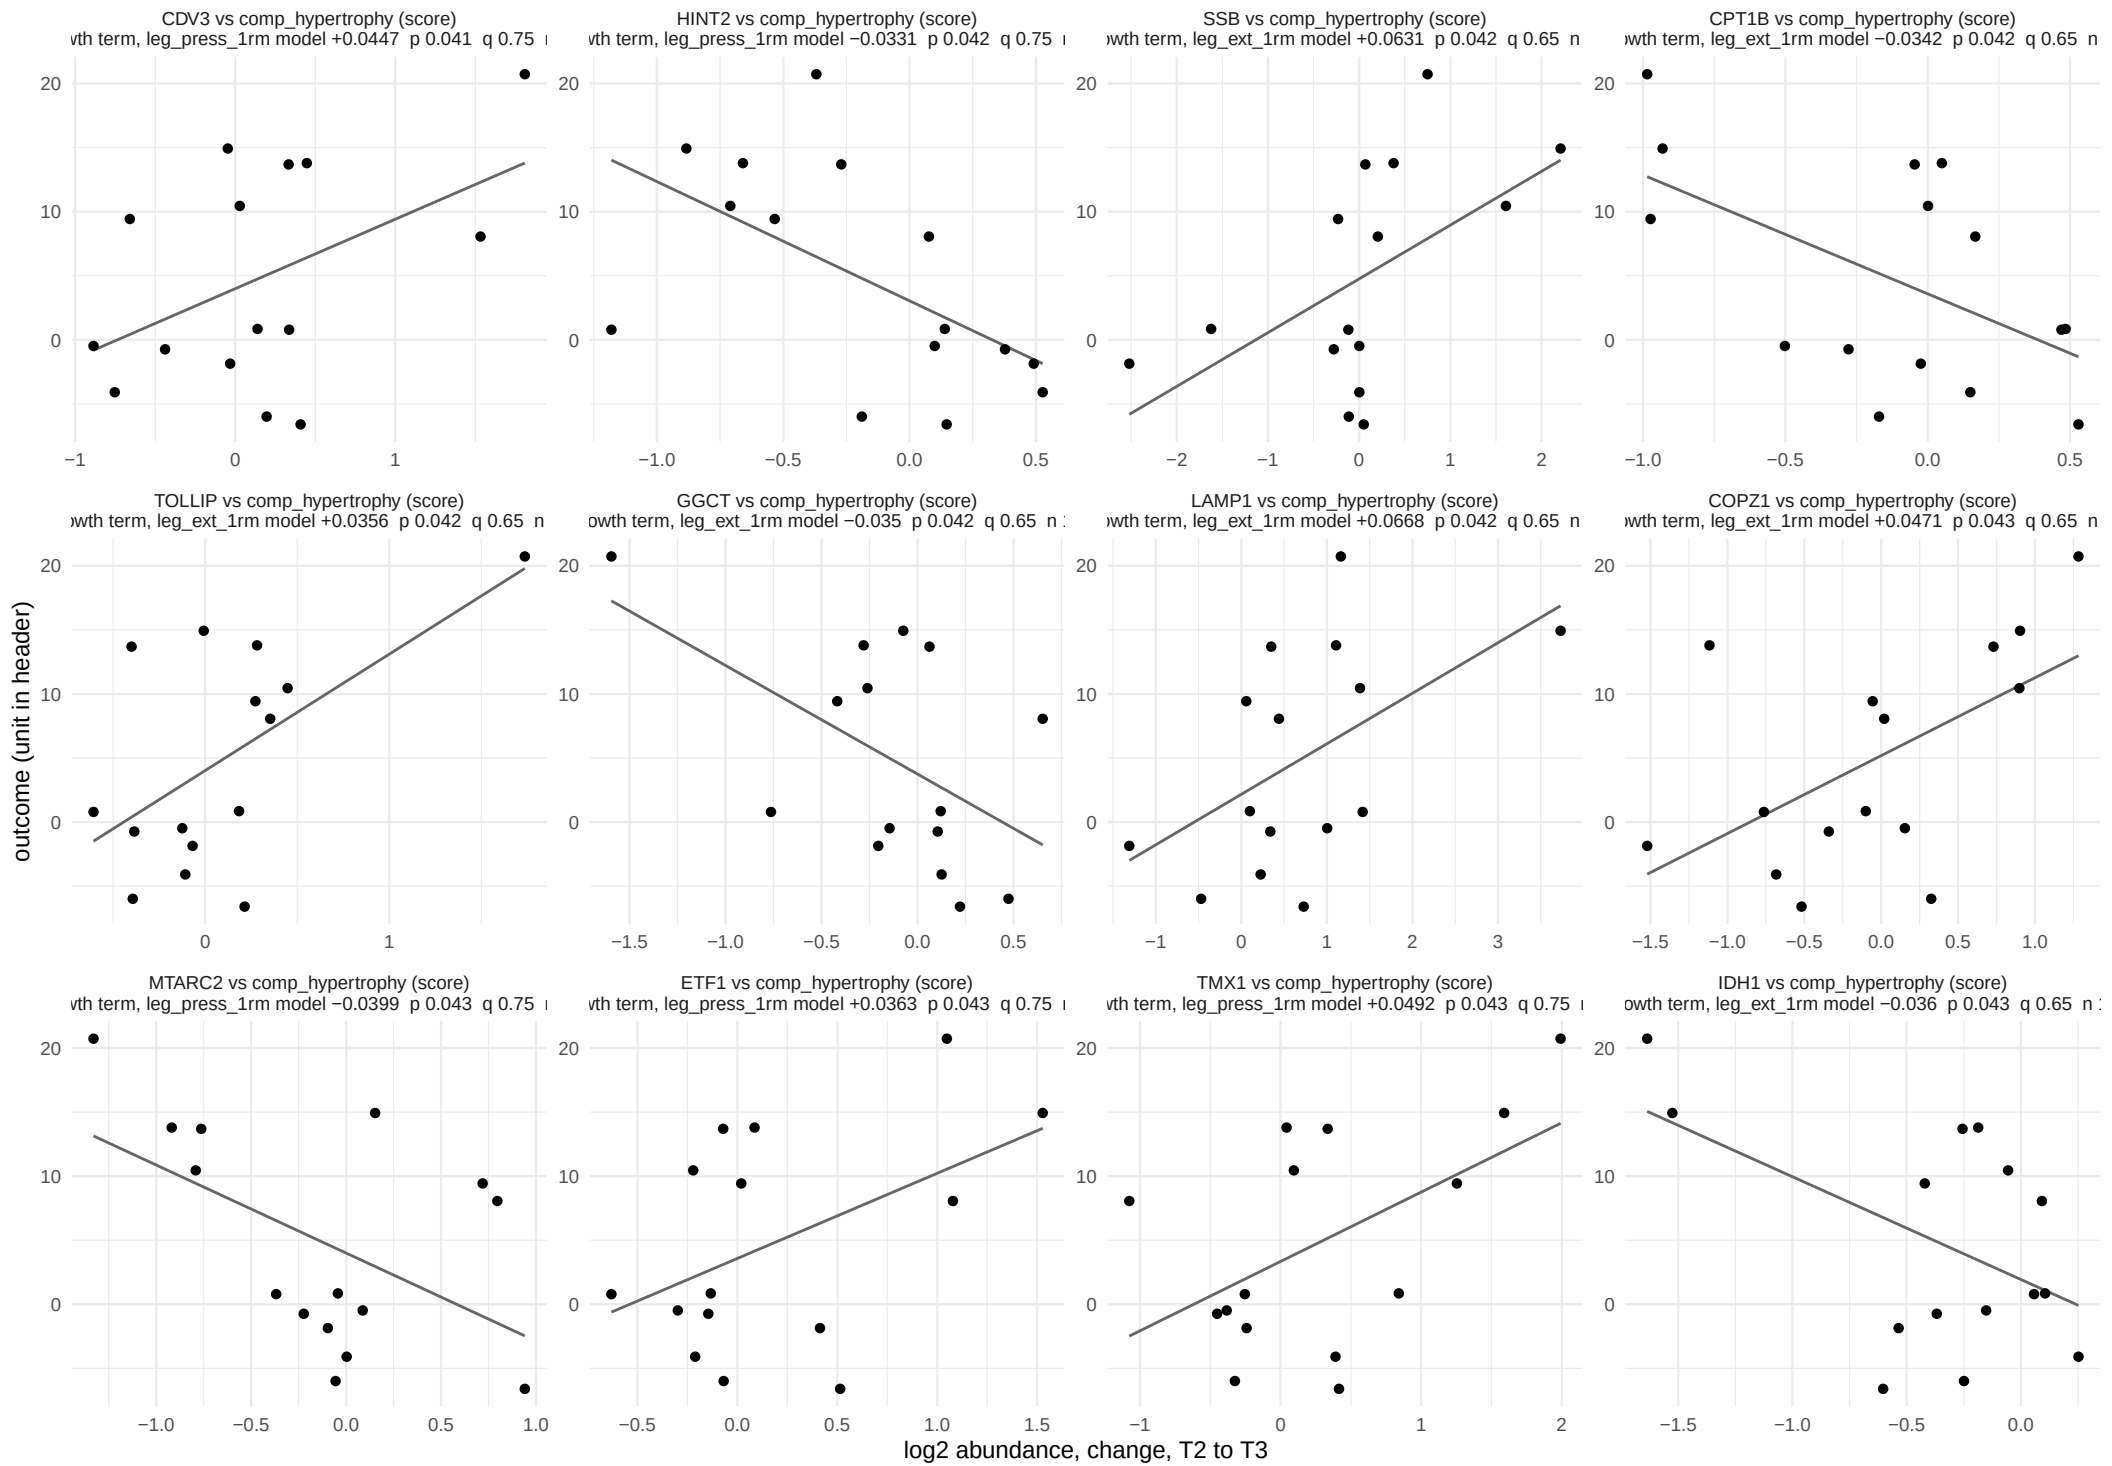

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/01_proteins.xlsx, two_predictor.


Two predictor, acute window

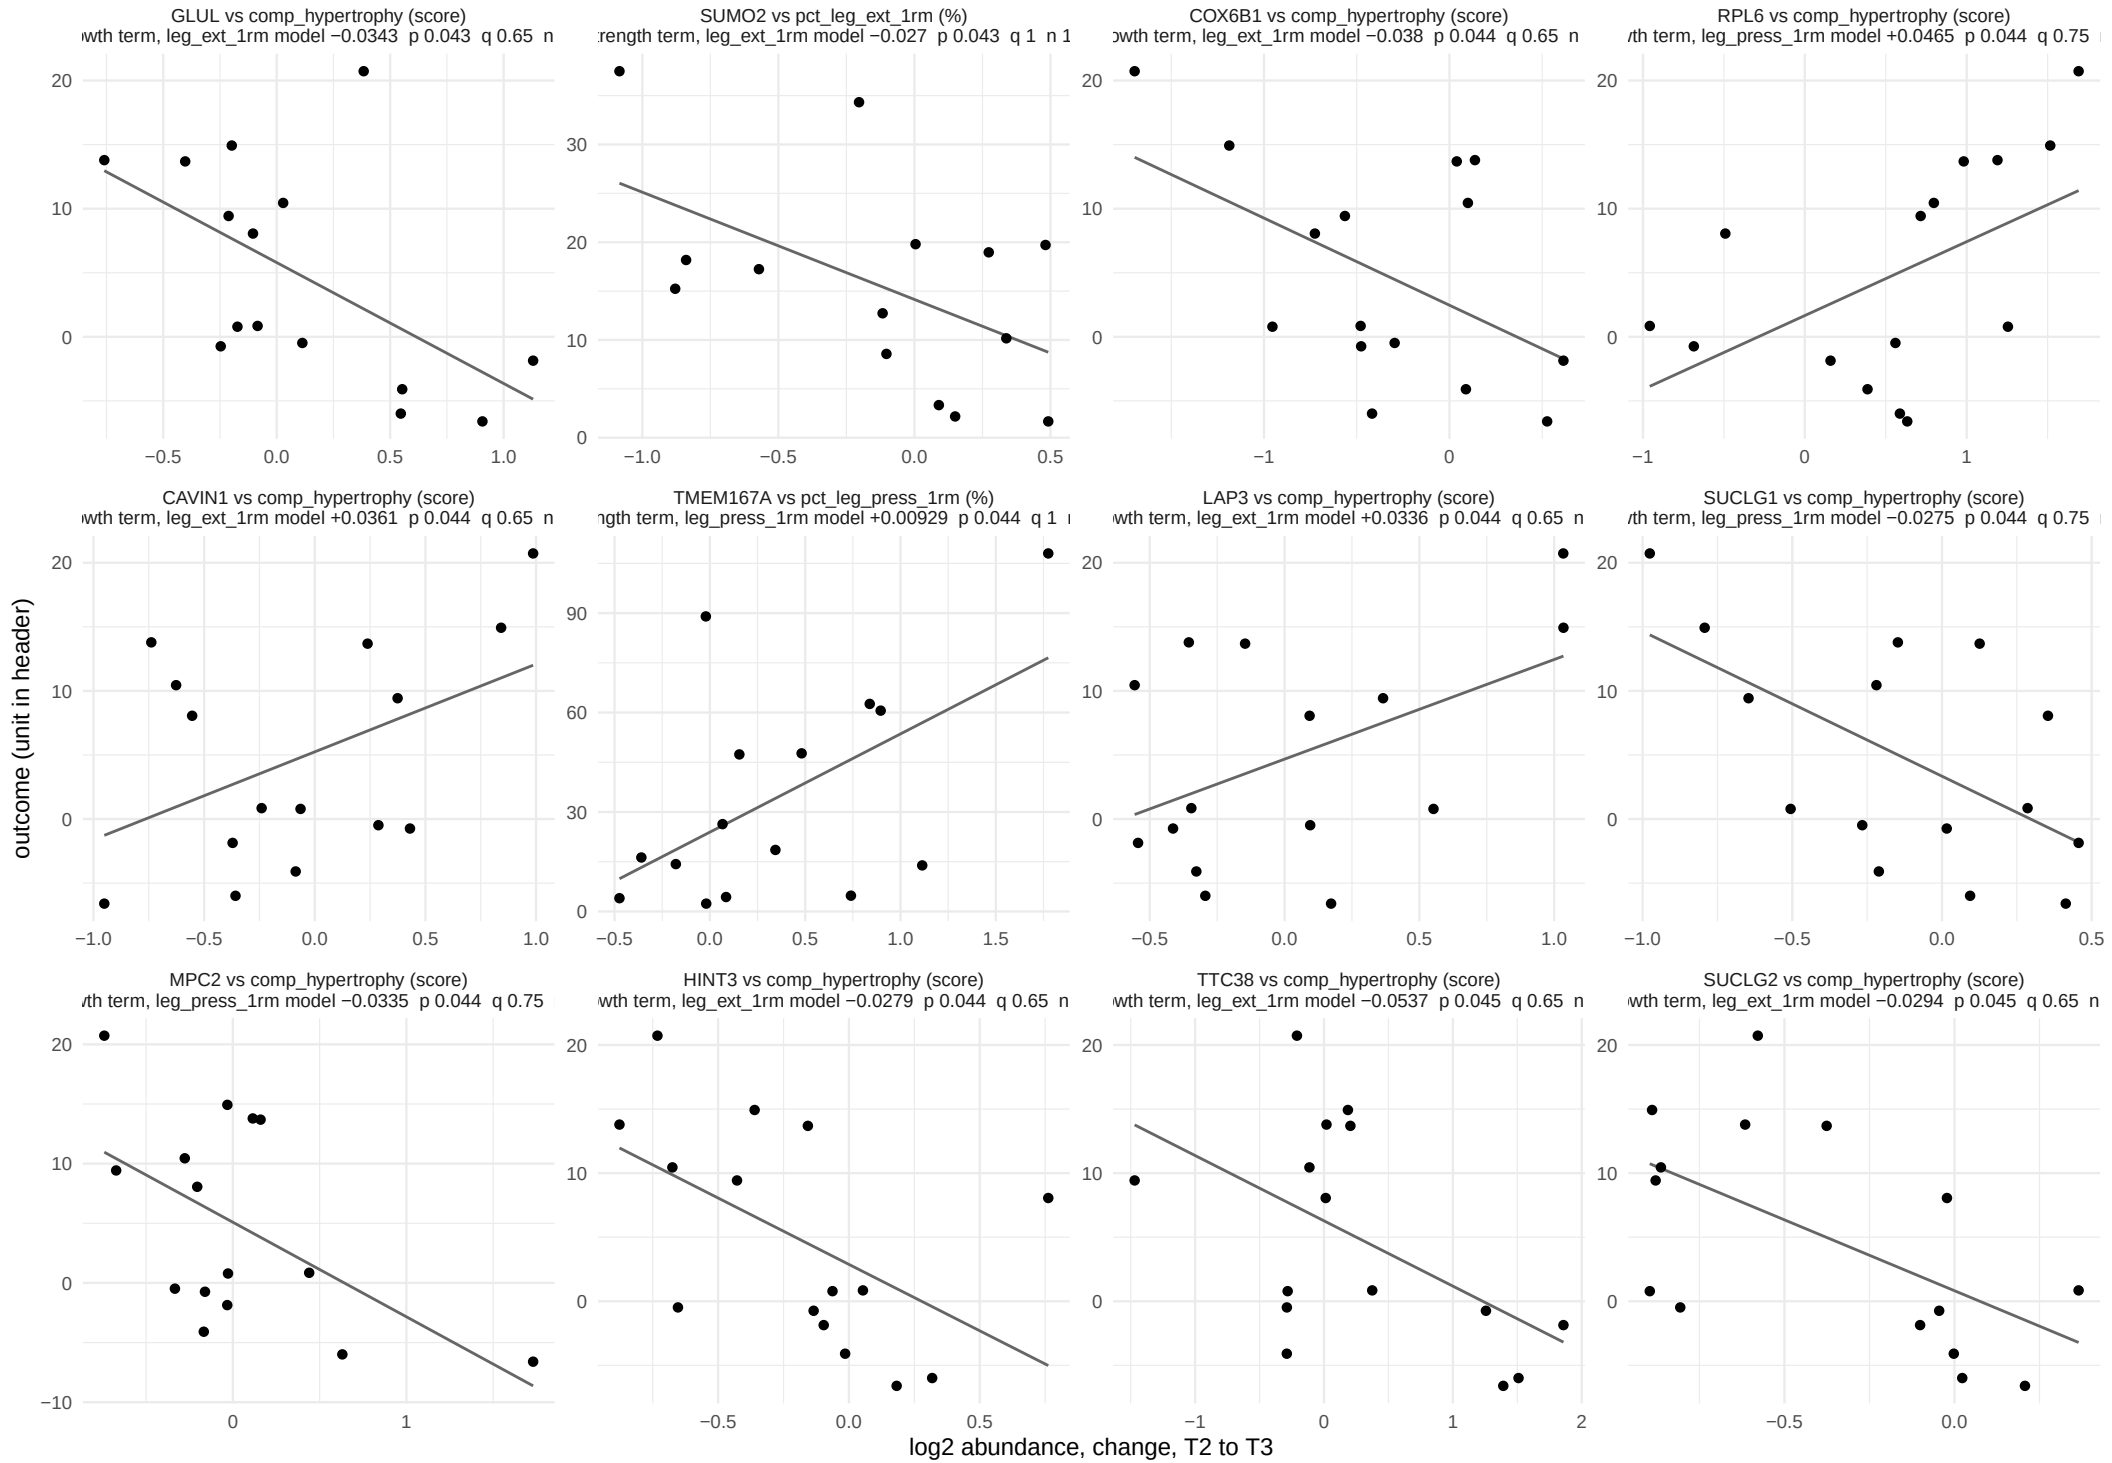

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/01_proteins.xlsx, two_predictor.

Two predictor, acute window


324 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 25 of 27.

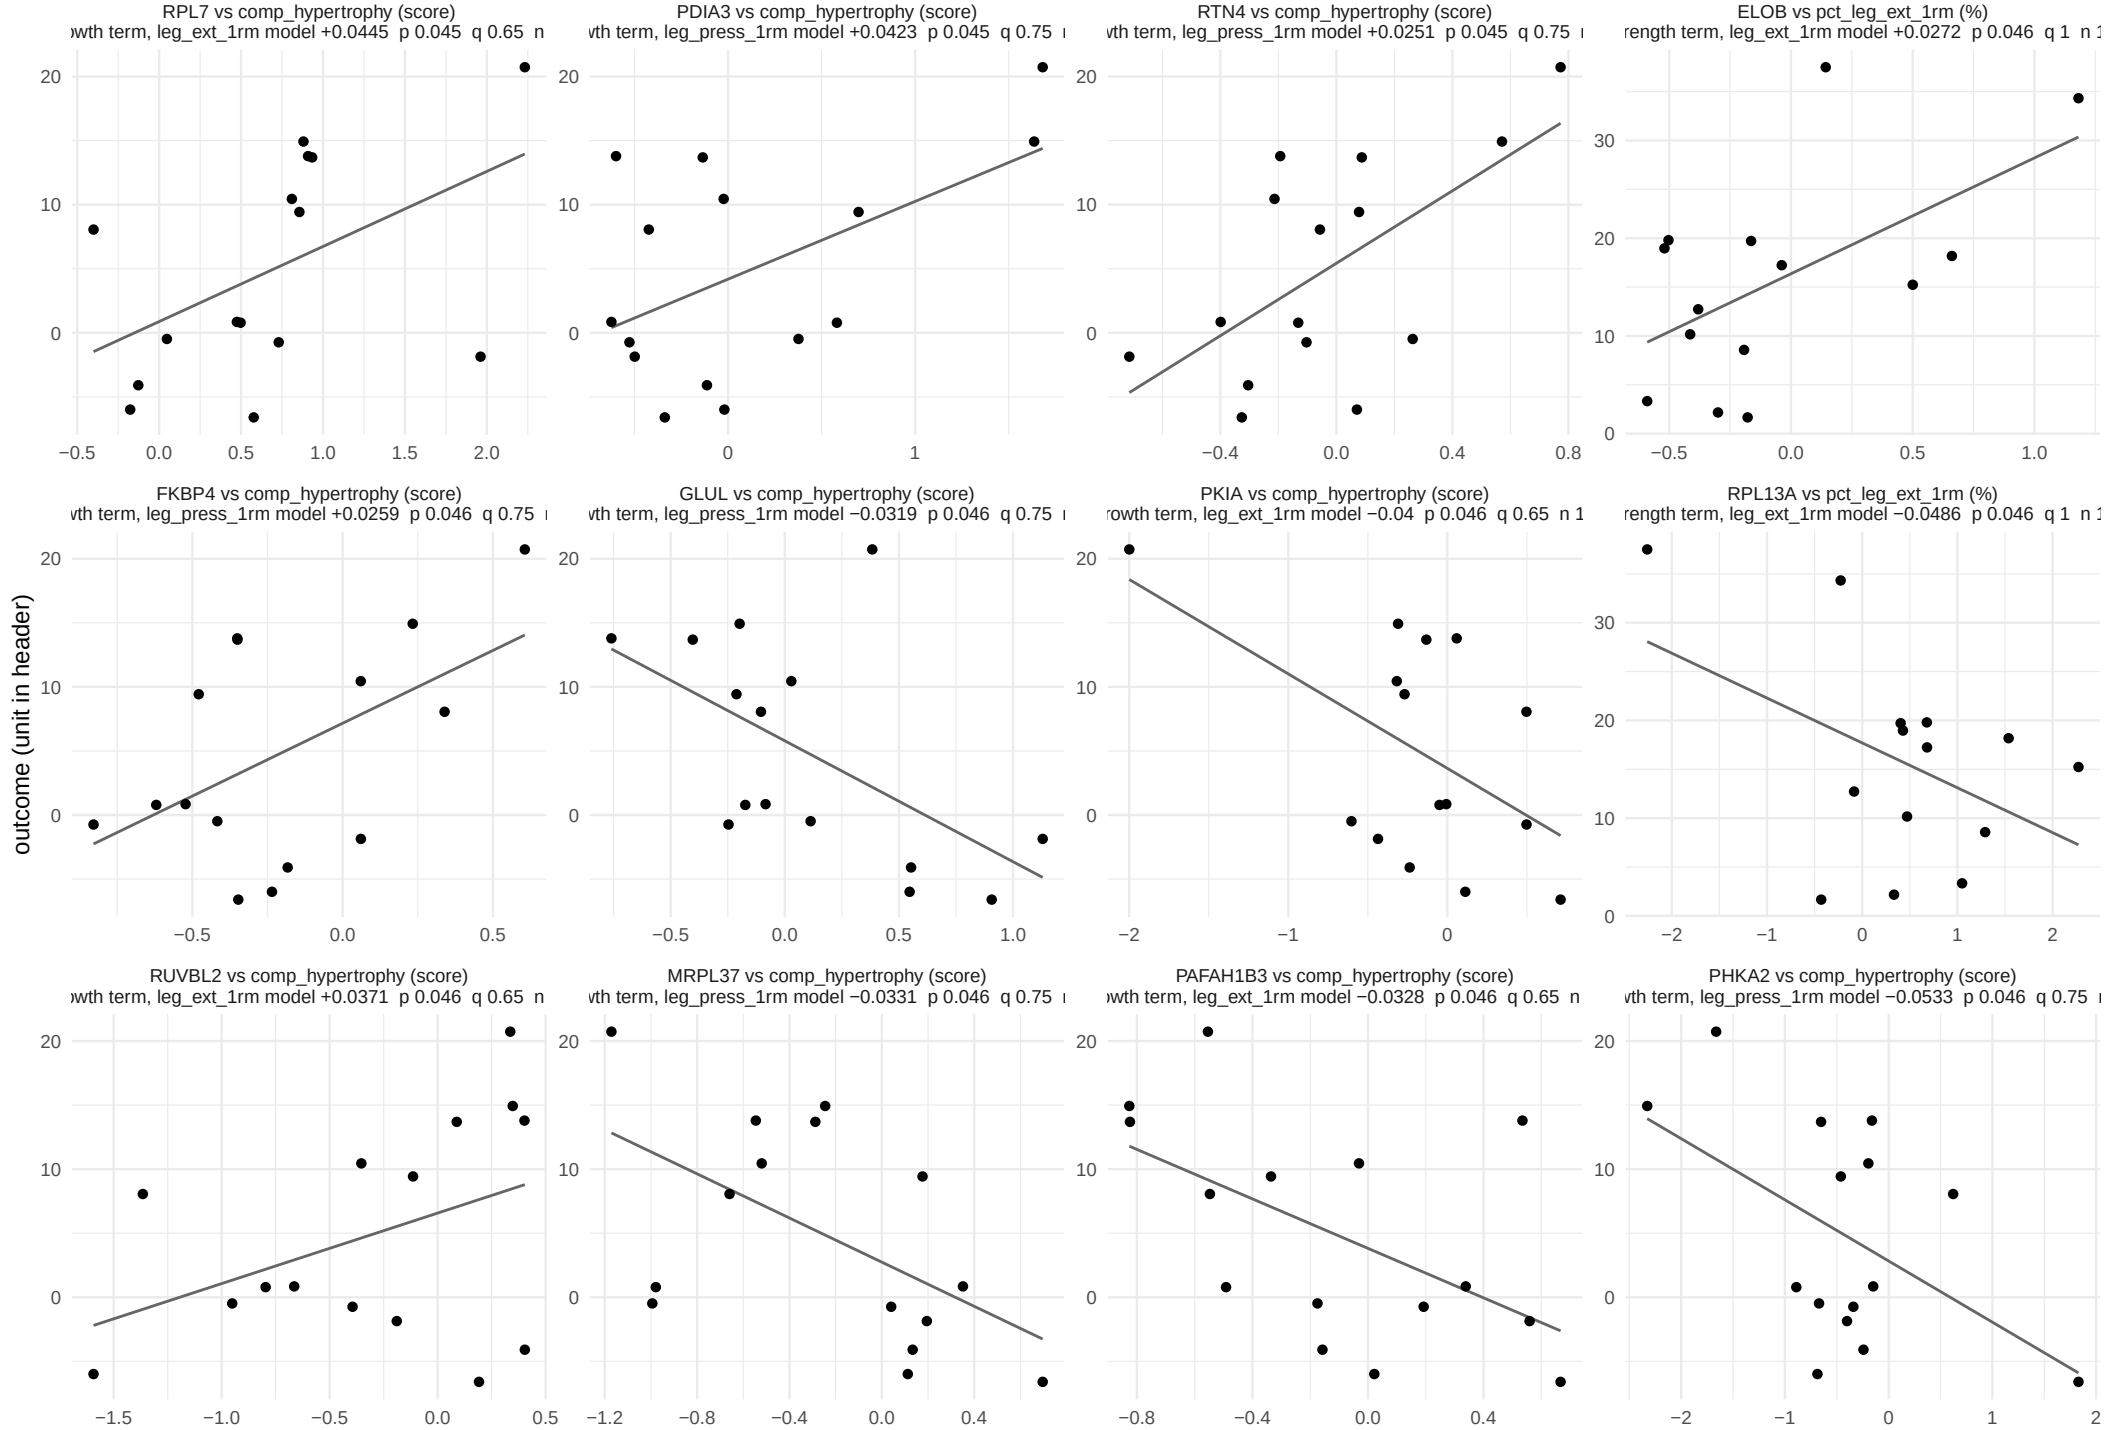

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/01_proteins.xlsx, two_predictor.

Two predictor, acute window


324 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 26 of 27.

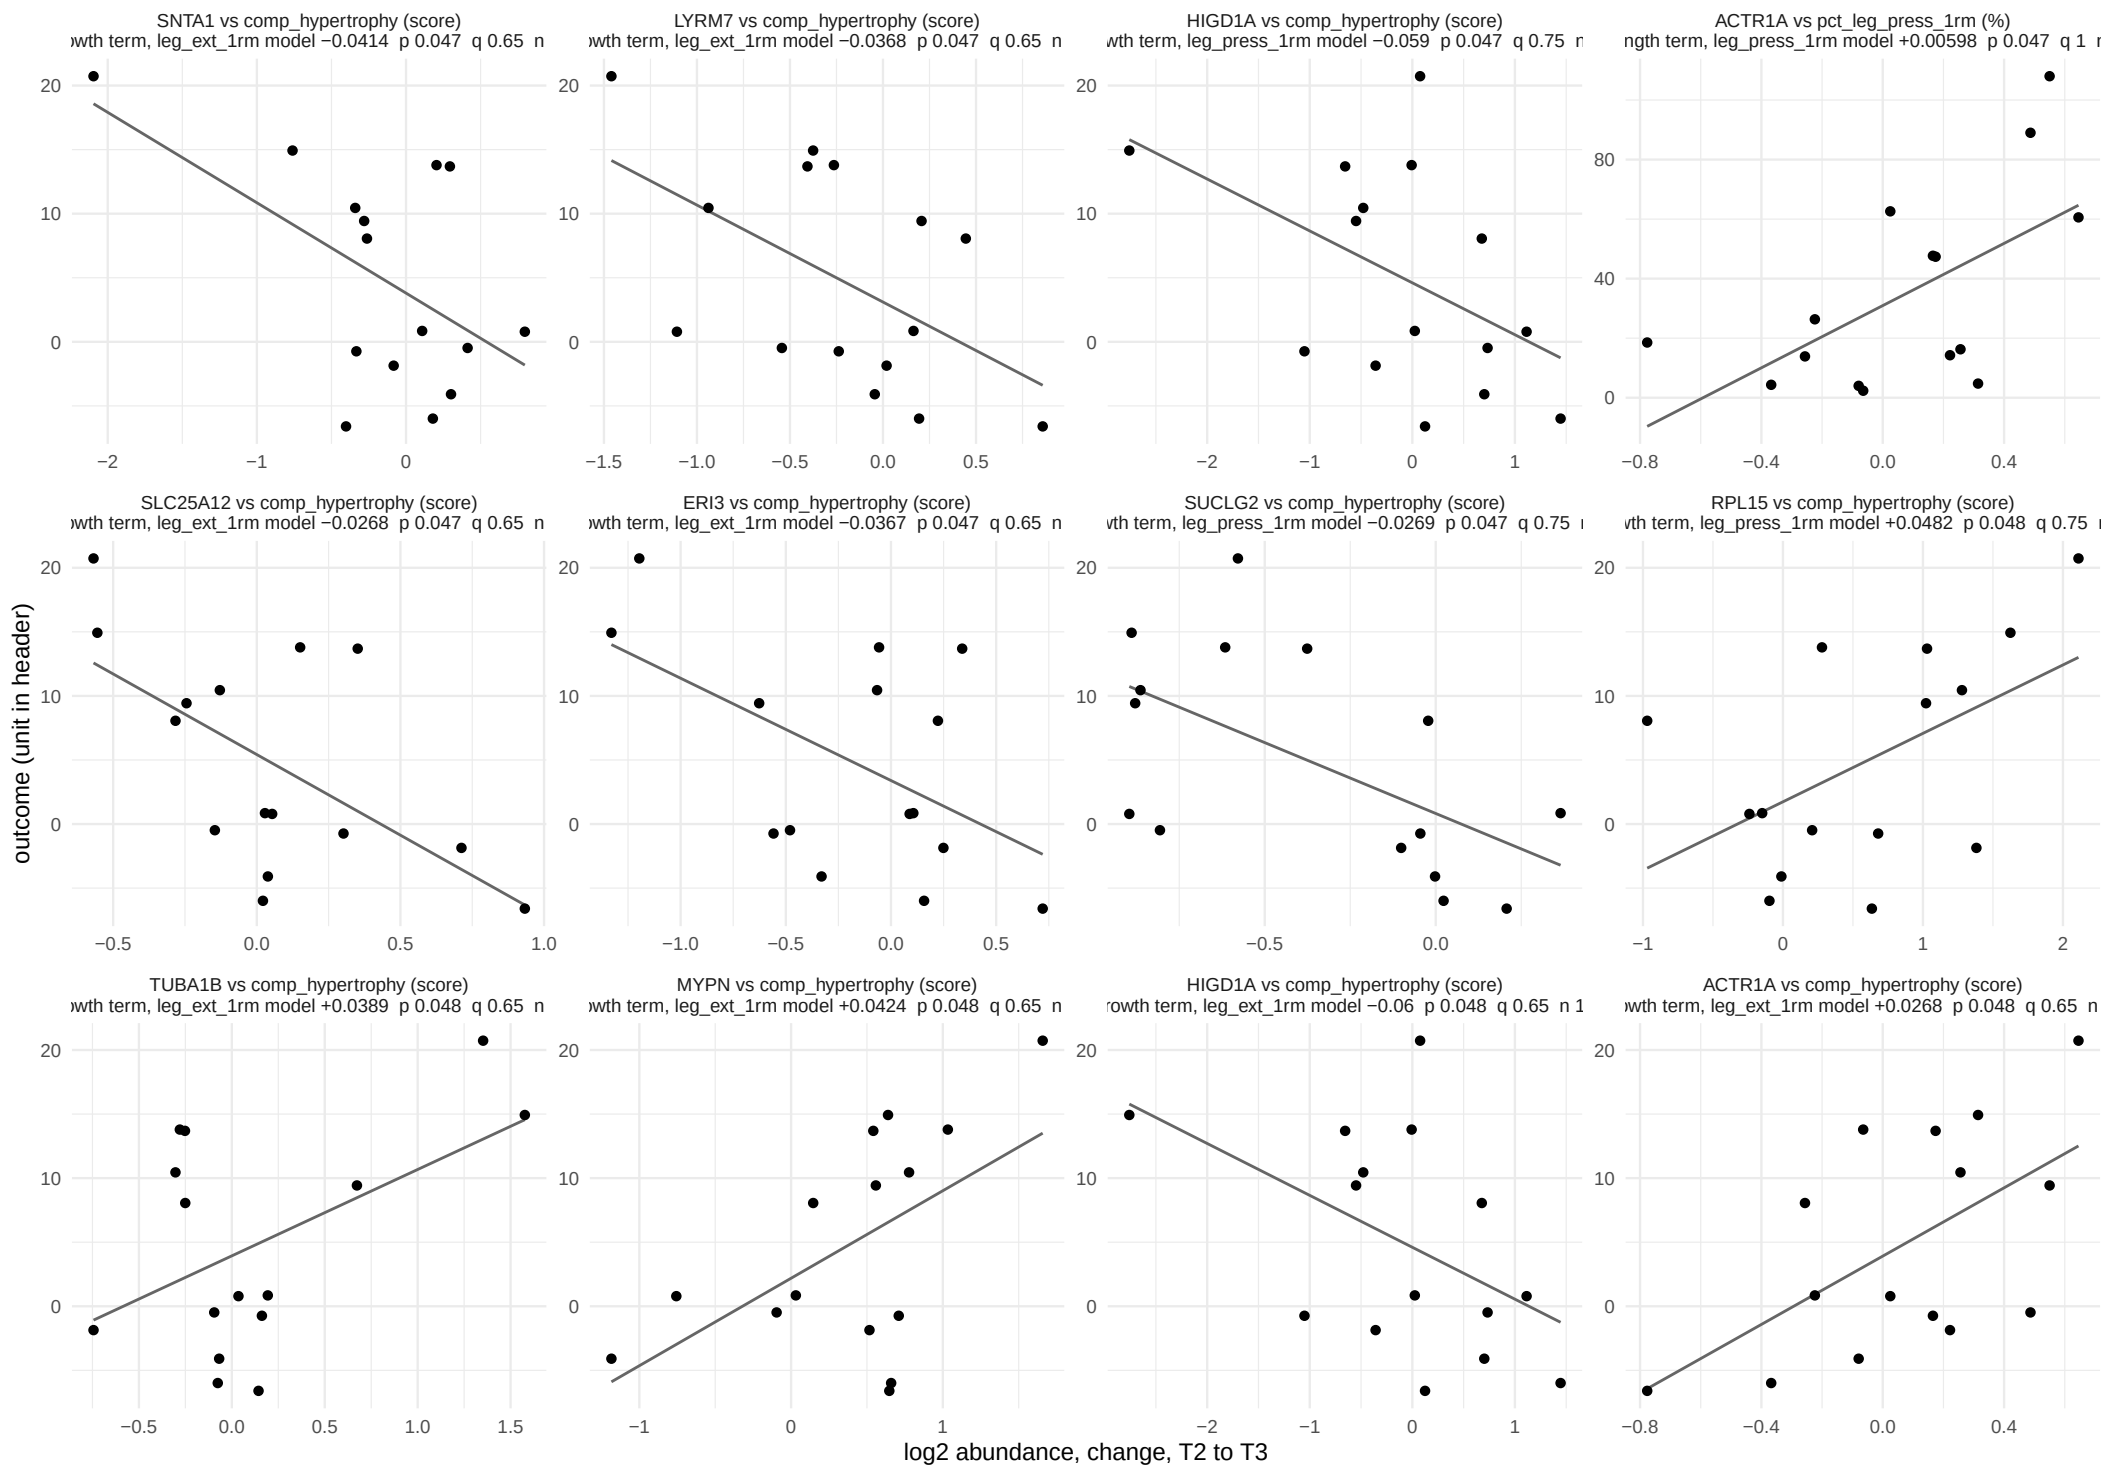

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/01_proteins.xlsx, two_predictor.

Two predictor, acute window

324 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 27 of 27.

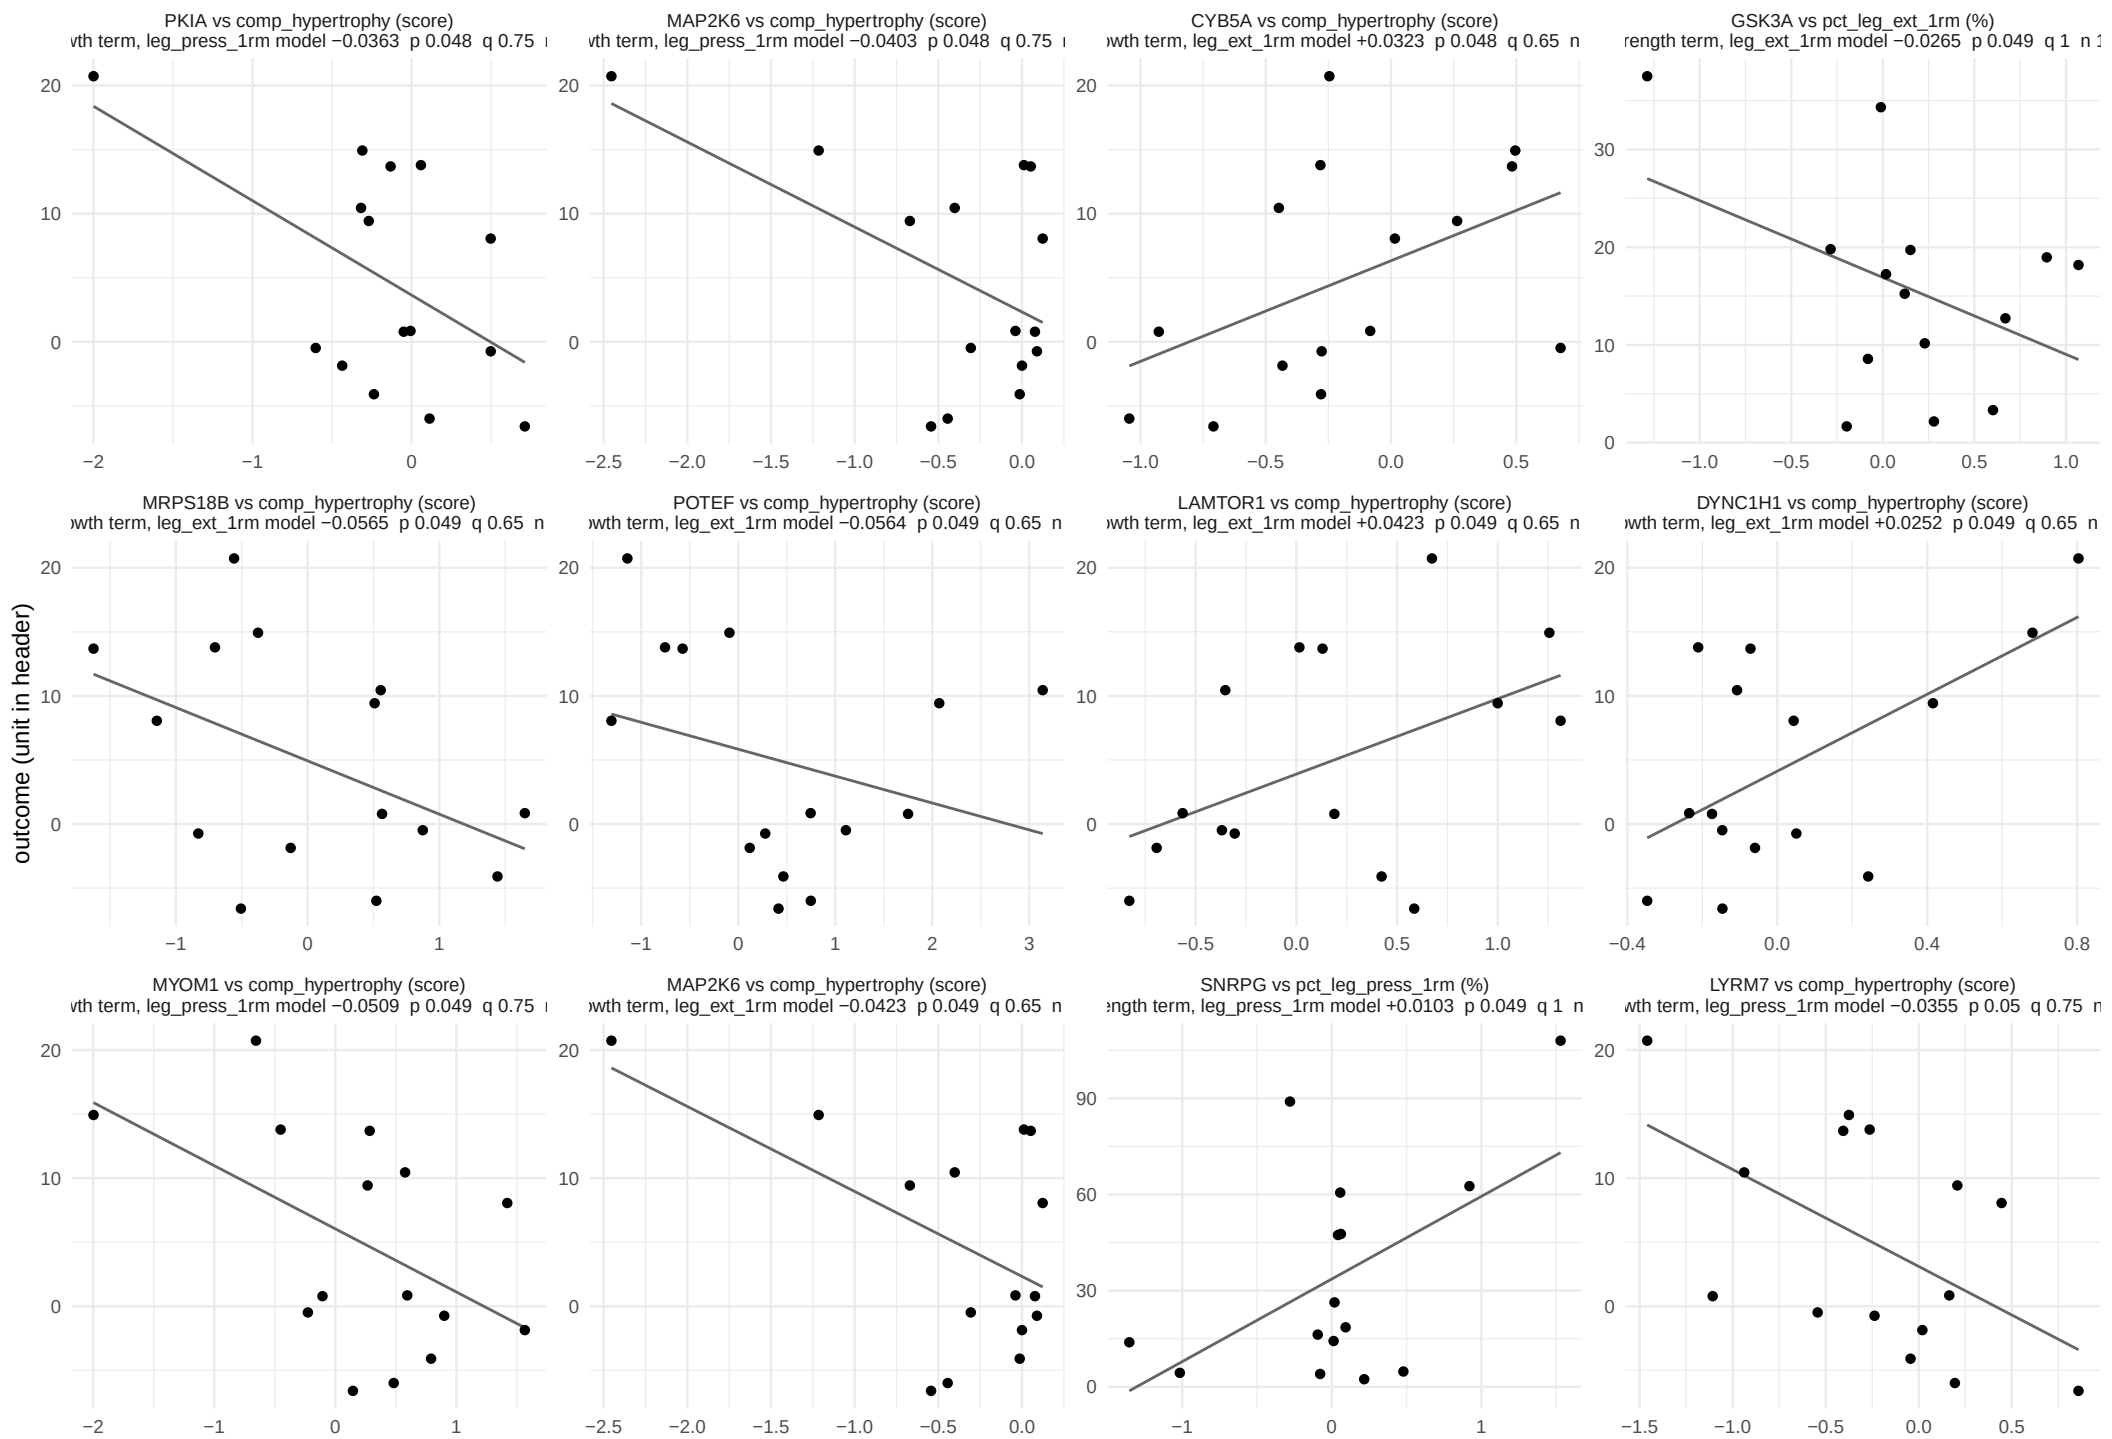

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/01_proteins.xlsx, two_predictor.