

Sample model overview: Hallmark

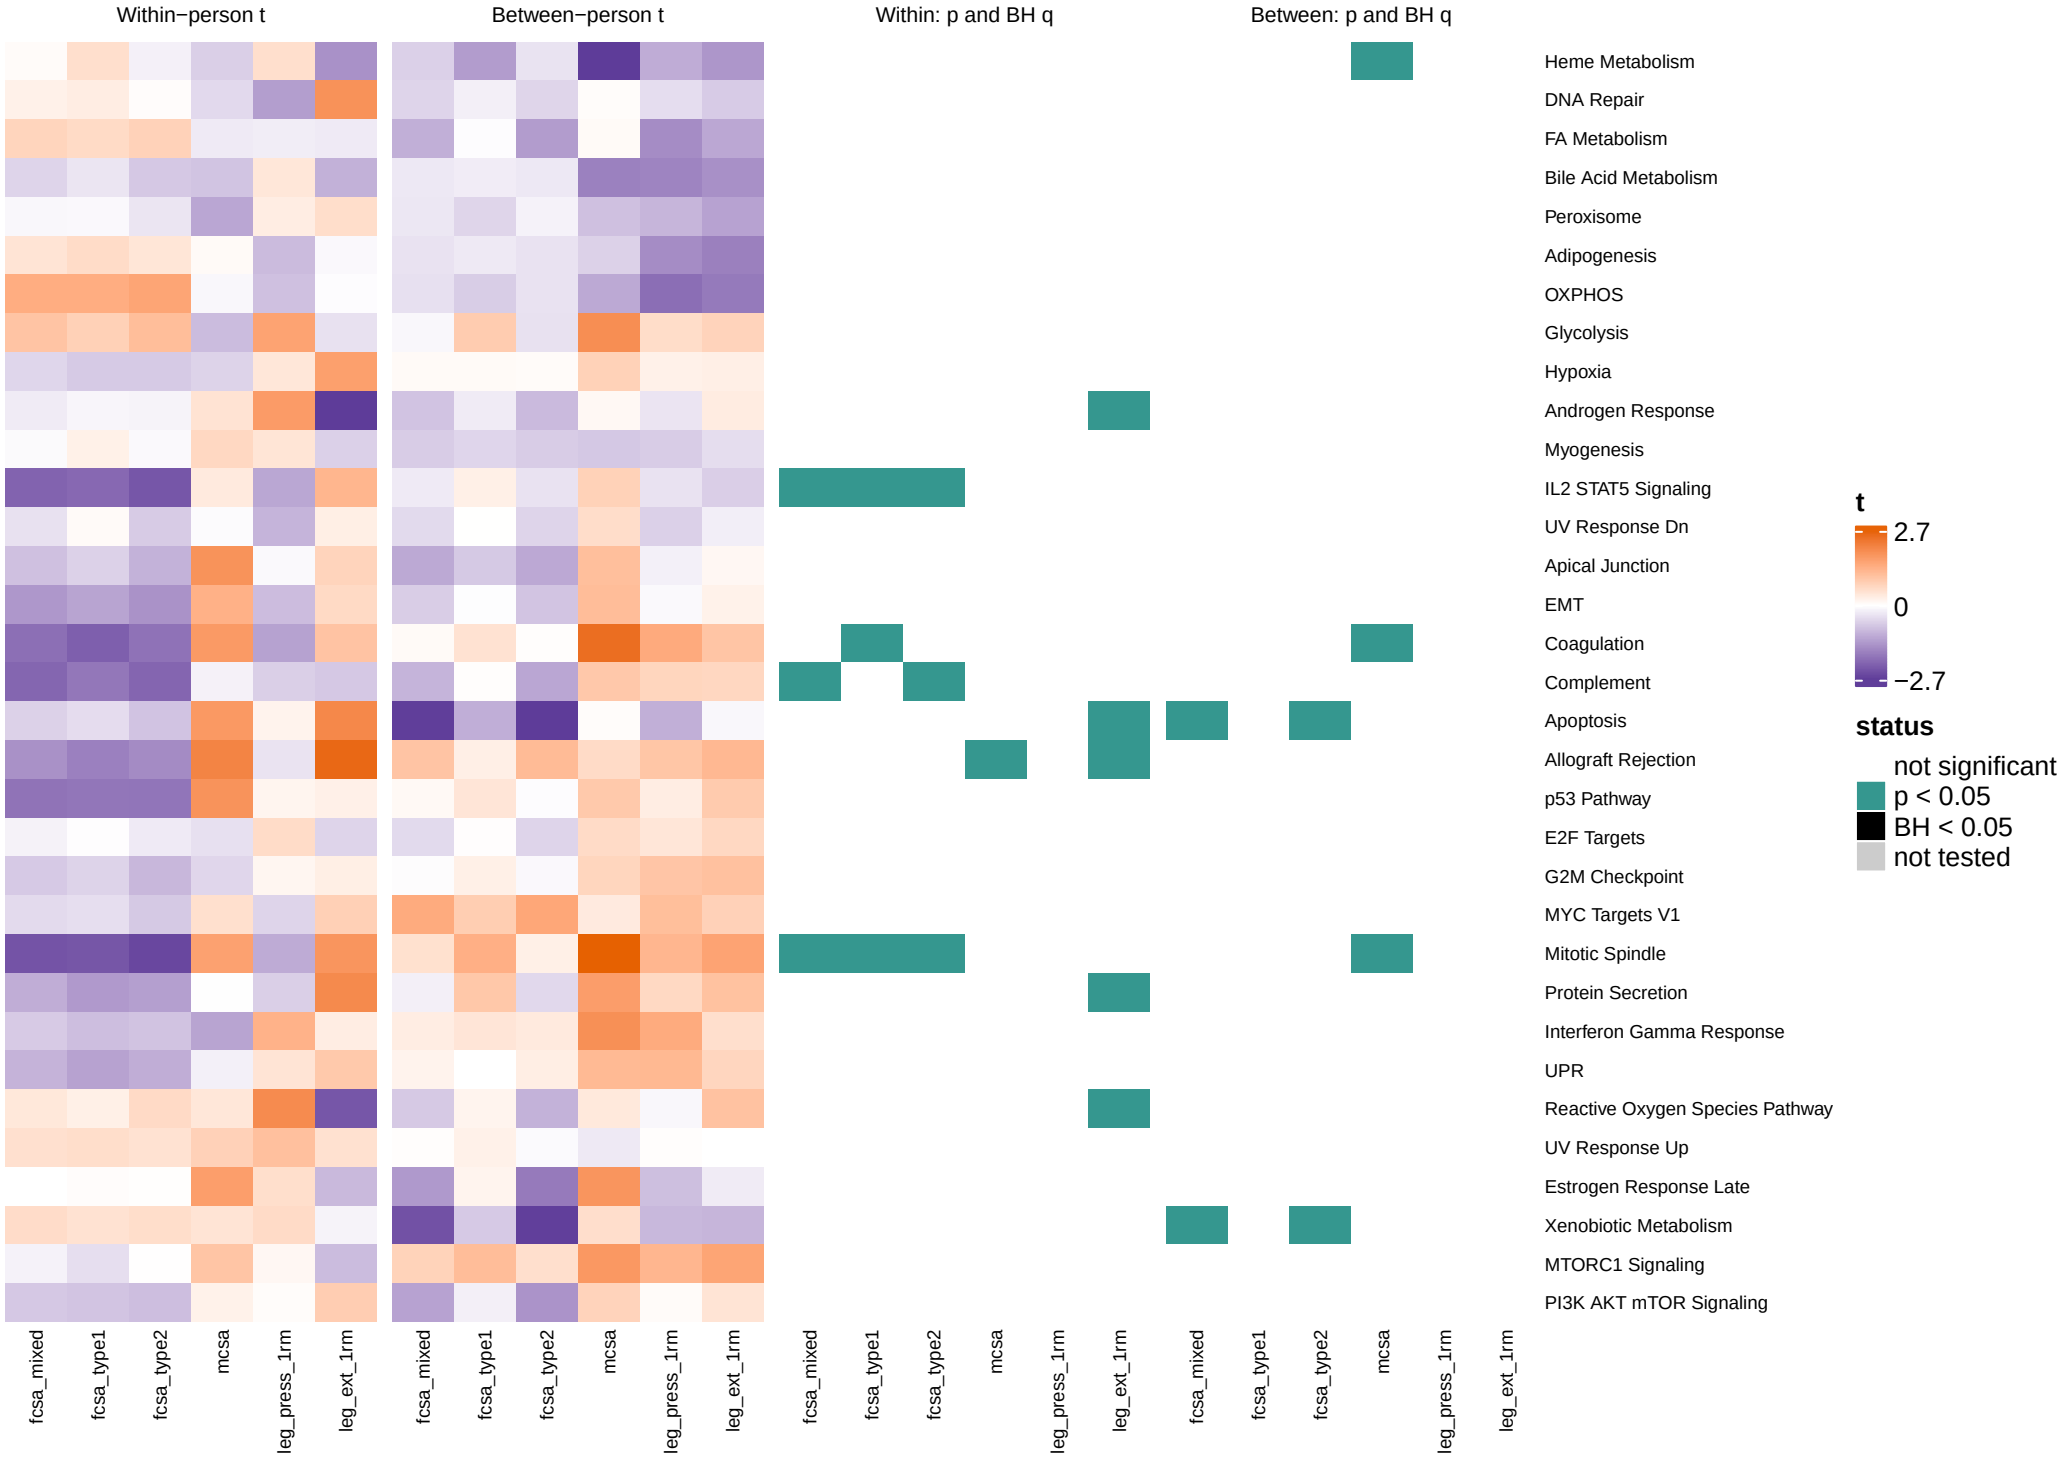


All 33 sets, one row each. Moderated t of the within and between terms, abundance ~ timepoint + between + within, subject blocked. Colours stop at the 99th percentile of |t|, 2.7. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/02_sets.xlsx, model.

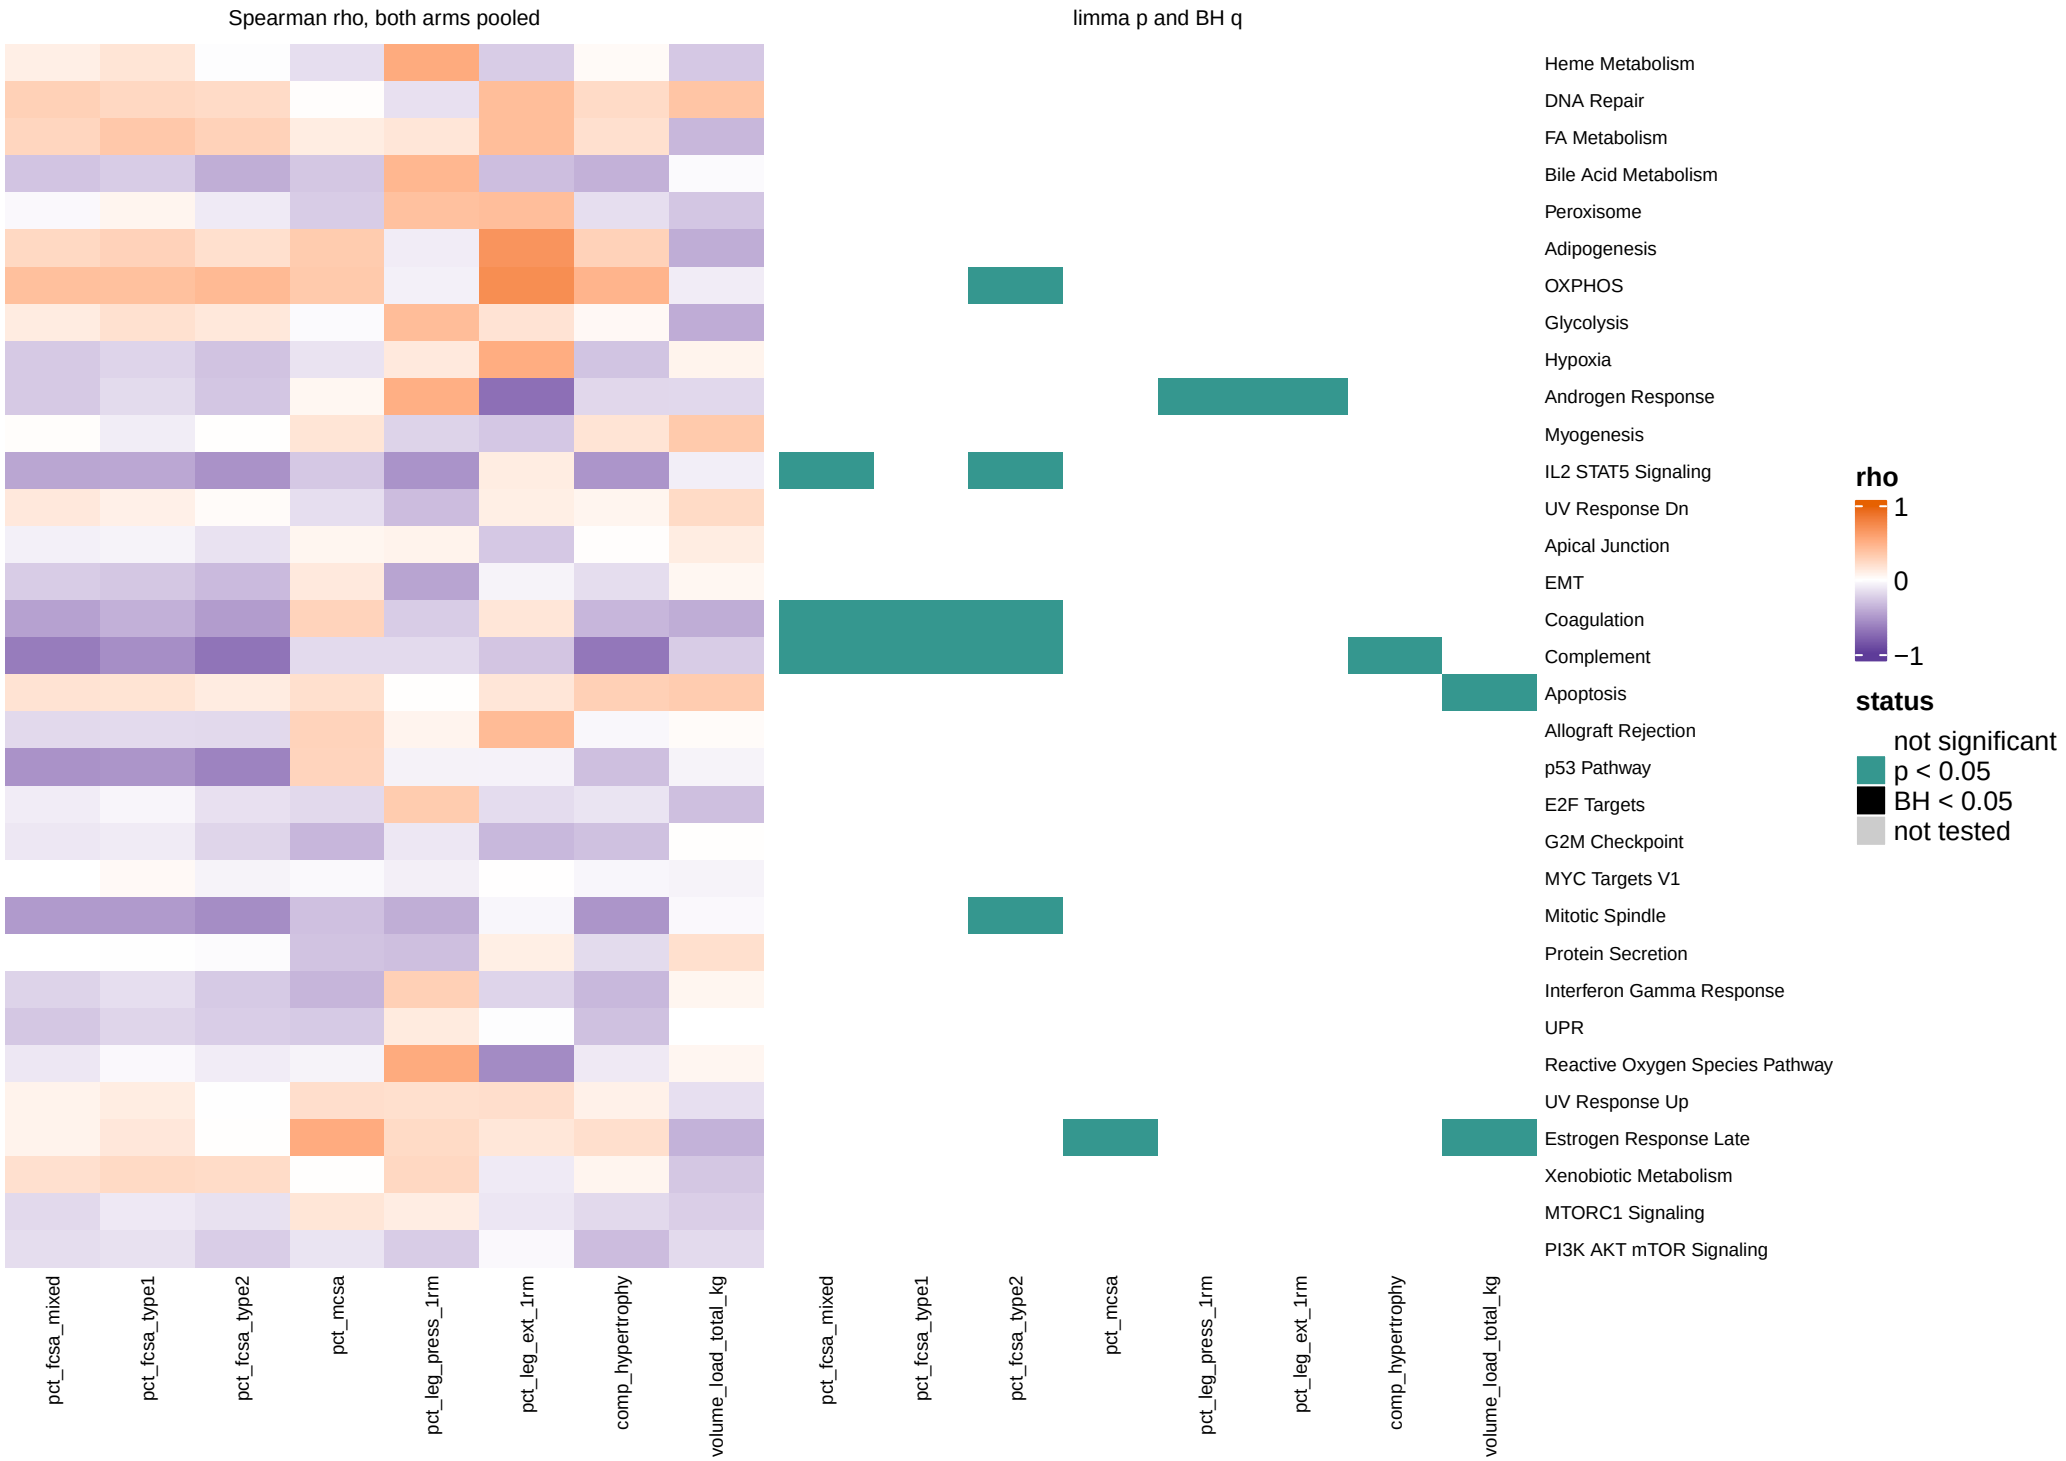


All 33 sets, one row each. Spearman rho between the singscore (change, T1 to T2) and each outcome; status from limma. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/02_sets.xlsx, change_score.

Change score overview, baseline window: Hallmark

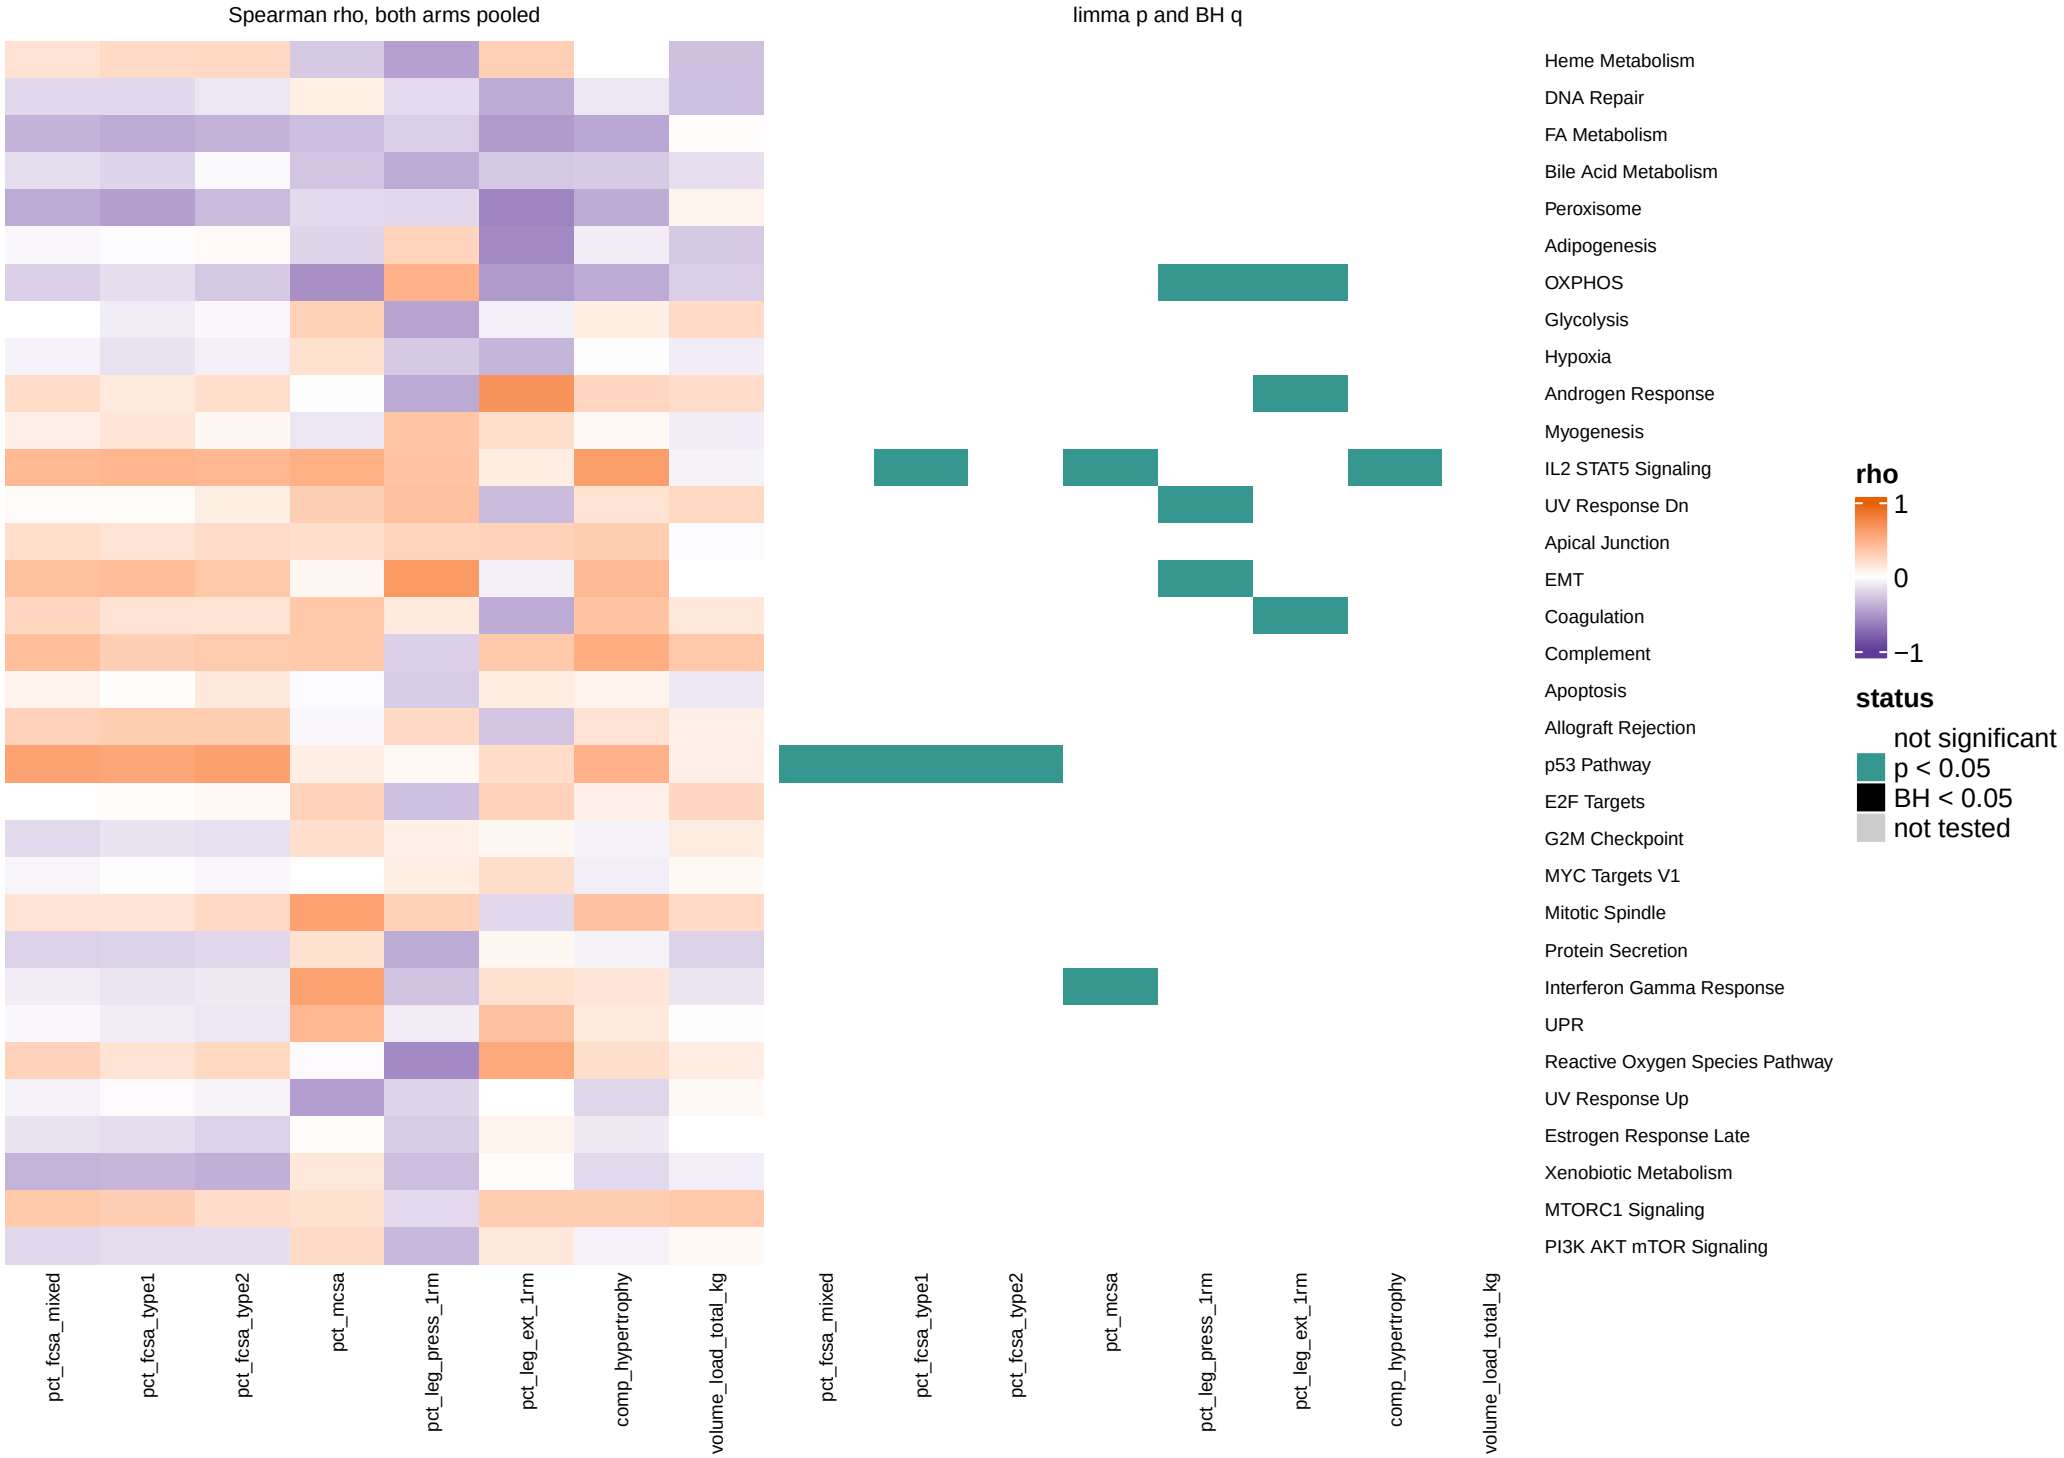

All 33 sets, one row each. Spearman rho between the singscore (T1 level) and each outcome; status from limma. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/02_sets.xlsx, change_score.

Change score overview, acute window: Hallmark

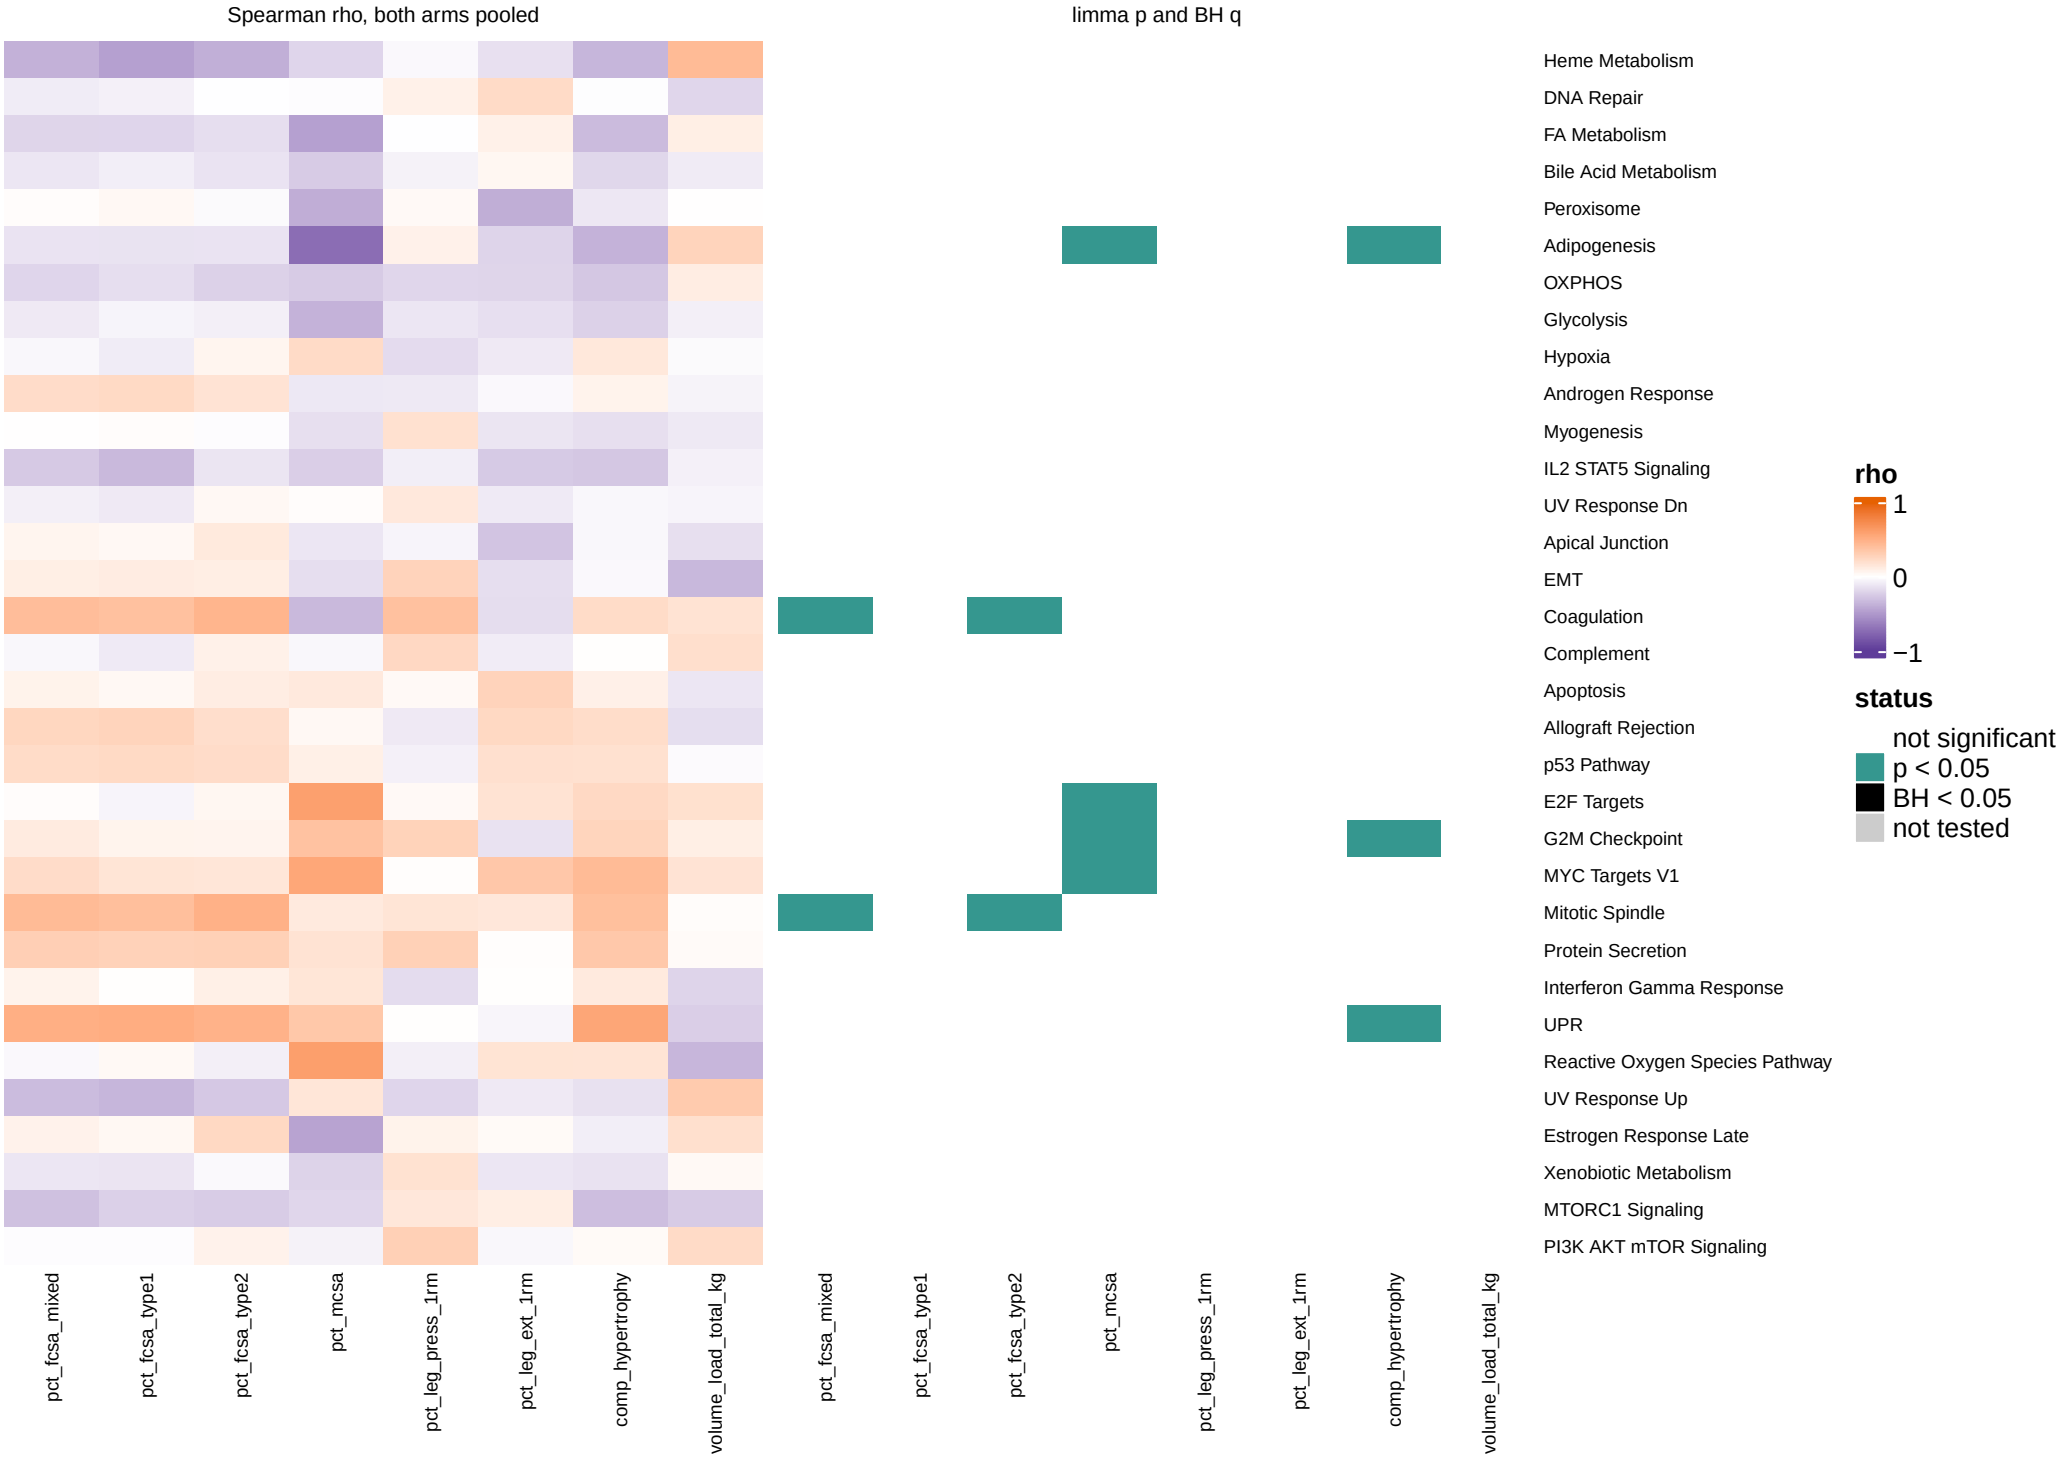


All 33 sets, one row each. Spearman rho between the singscore (change, T2 to T3) and each outcome; status from limma. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/02_sets.xlsx, change_score.

Change score overview, baseline_level window: Hallmark



All 33 sets, one row each. Spearman rho between the singscore (T1 level) and each outcome; status from limma. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/02_sets.xlsx, change_score.

Change score overview, post_level window: Hallmark

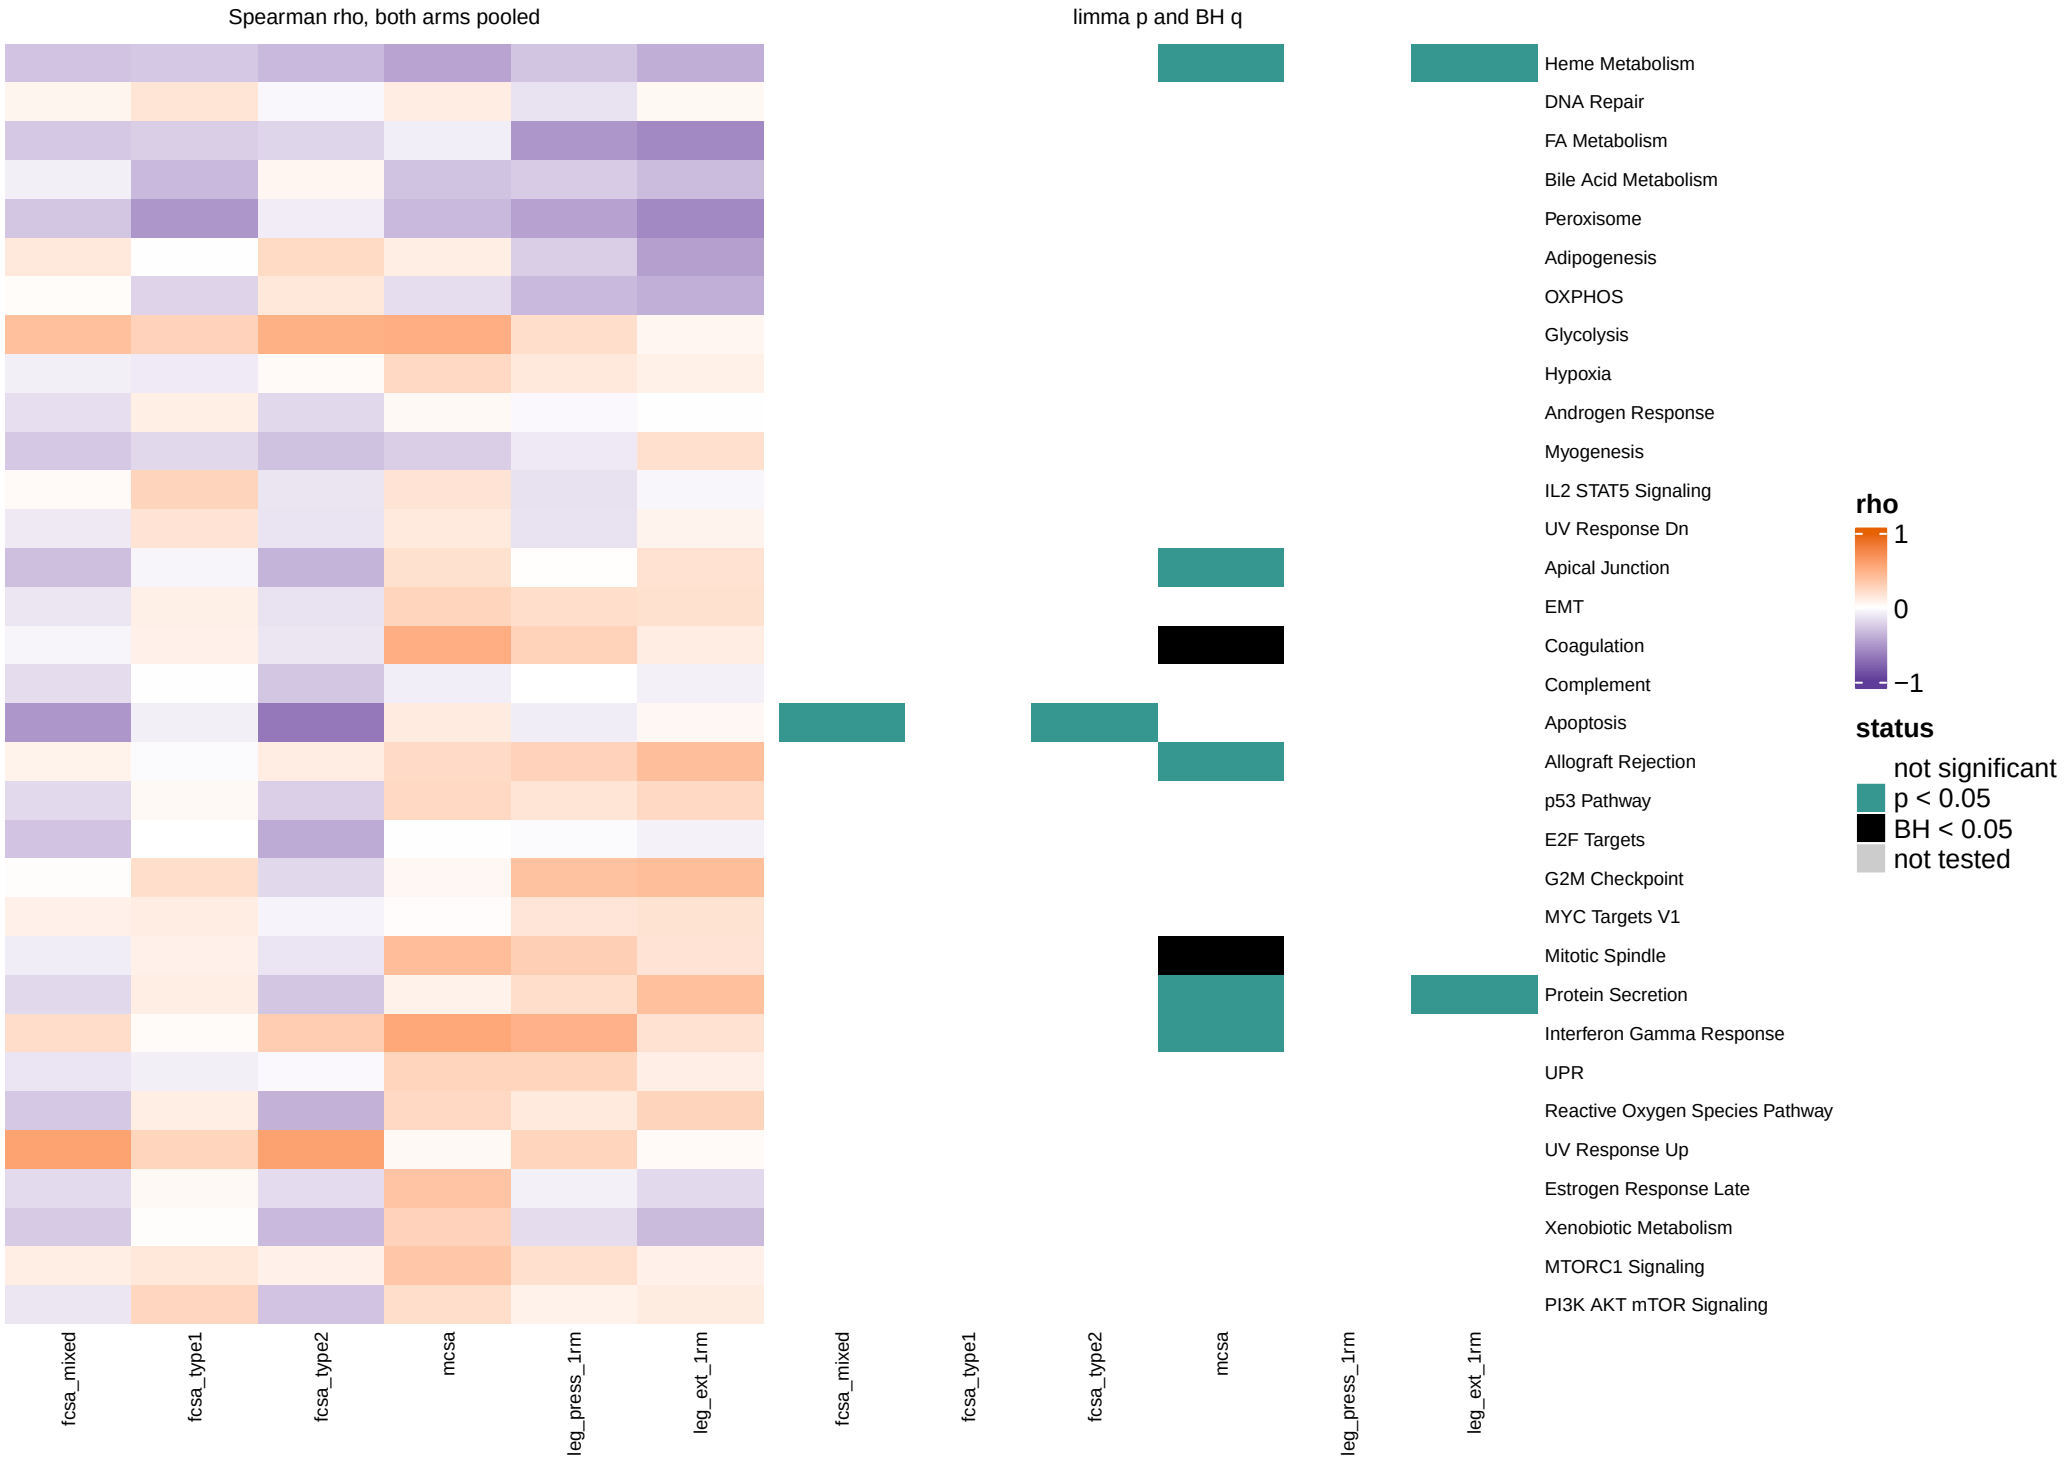


All 33 sets, one row each. Spearman rho between the singscore (T2 level) and each outcome; status from limma. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/02_sets.xlsx, change_score.

Change score overview, post_bout_level window: Hallmark



All 33 sets, one row each. Spearman rho between the singscore (T3 level) and each outcome; status from limma. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/02_sets.xlsx, change_score.

Sample model overview: Reactome

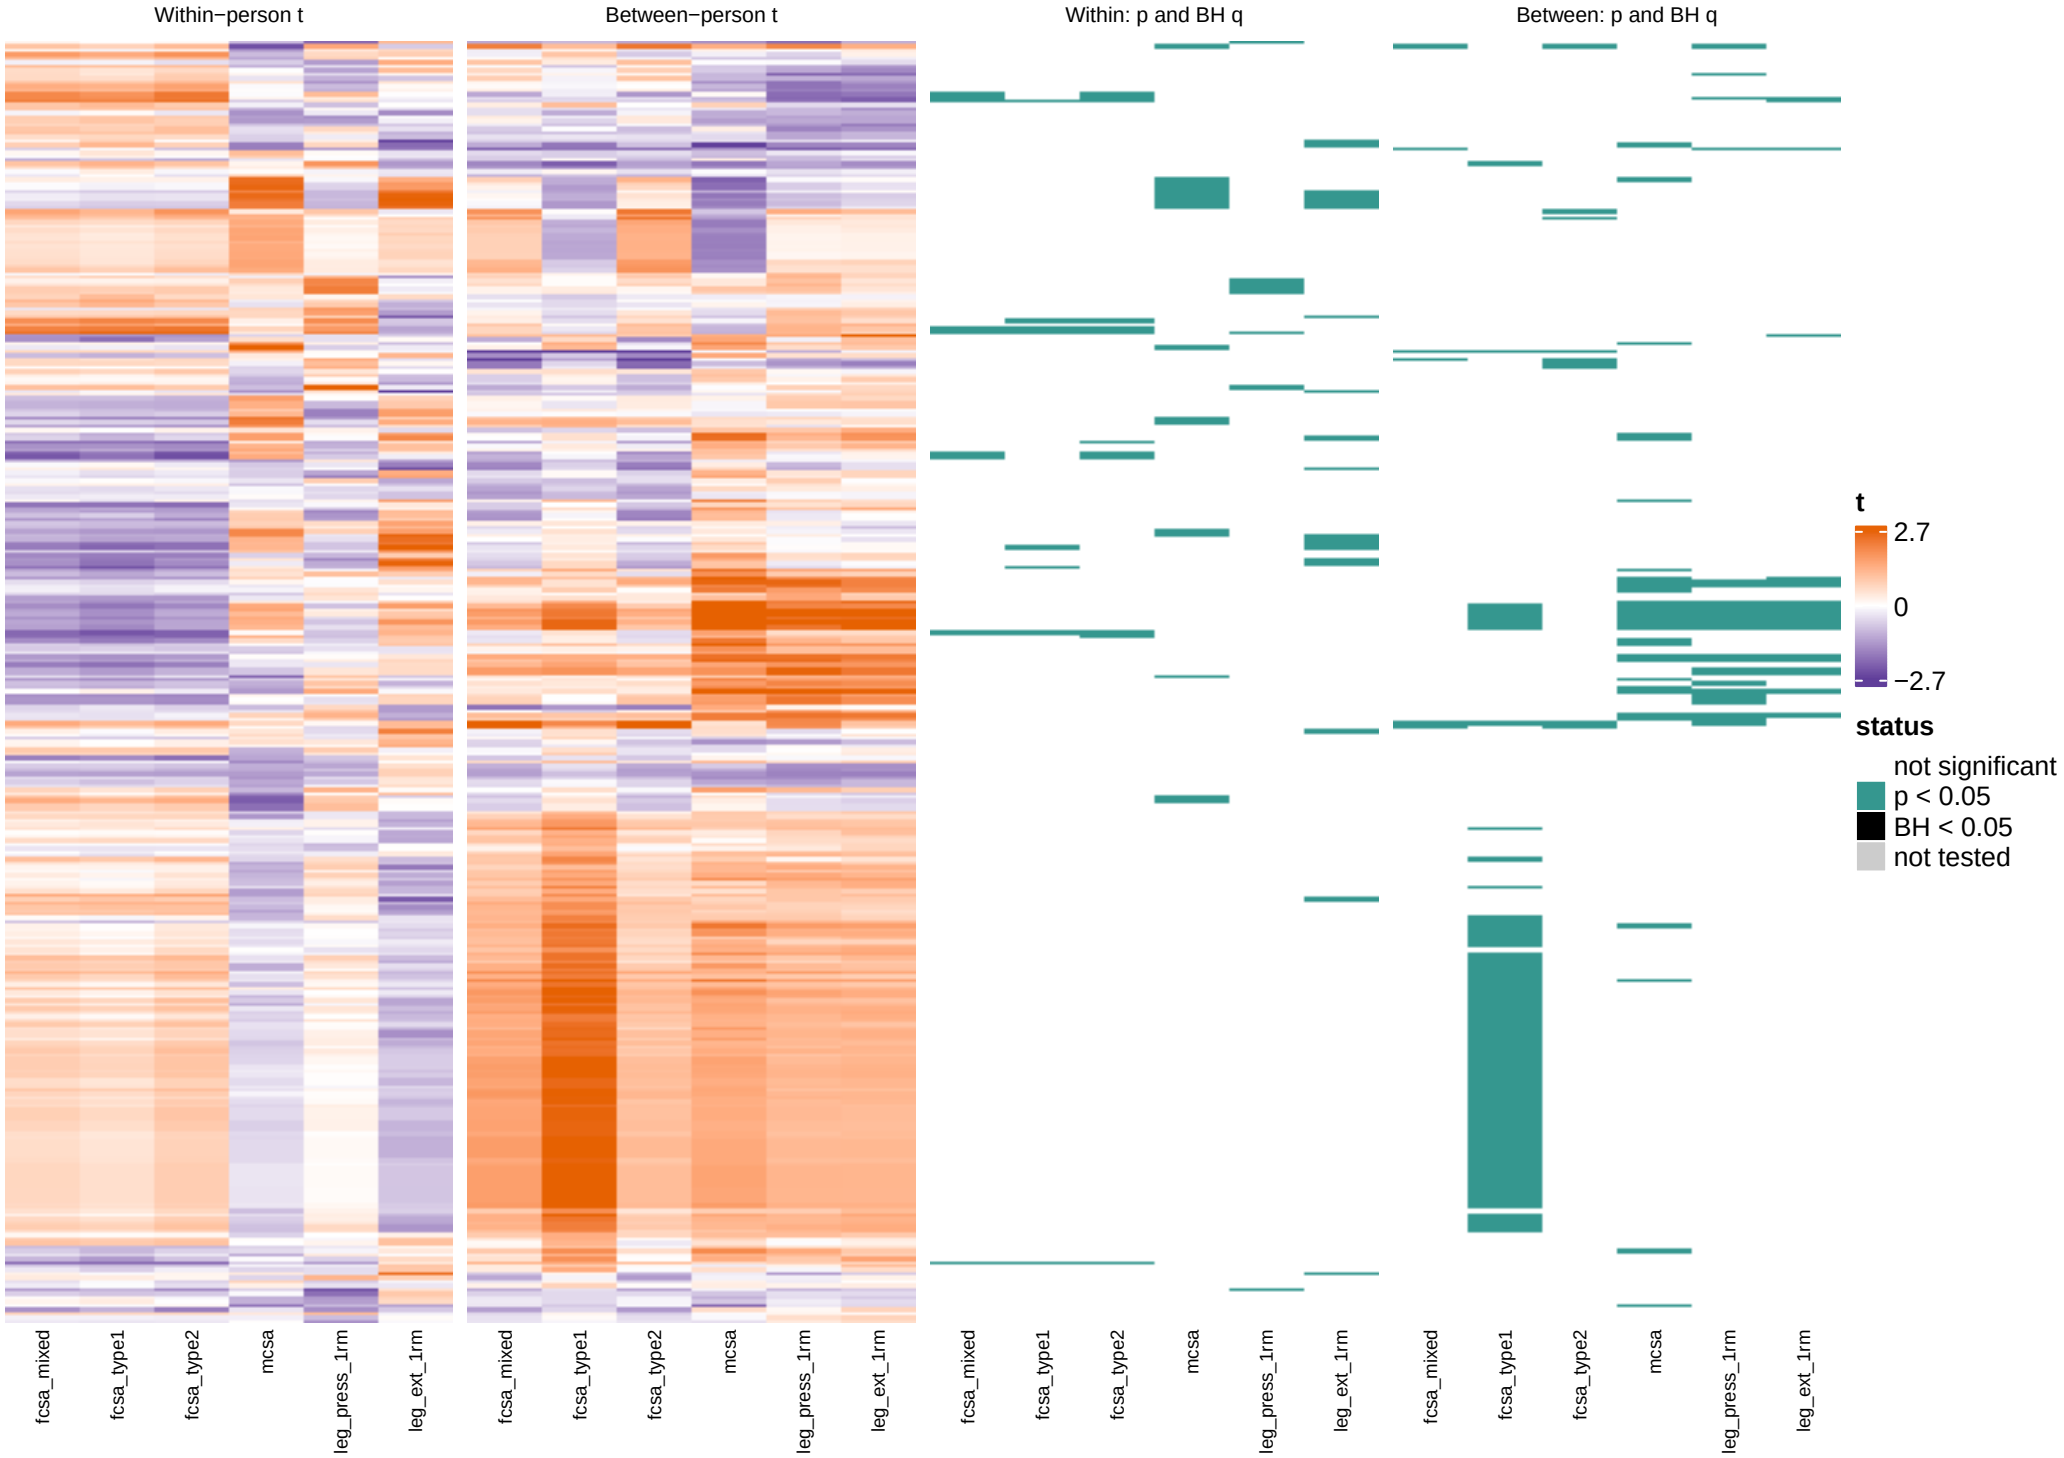


All 328 sets, one row each. Moderated t of the within and between terms, abundance ~ timepoint + between + within, subject blocked. Colours stop at the 99th percentile of |t|, 2.7. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/02_sets.xlsx, model.

Change score overview, training window: Reactome




All 328 sets, one row each. Spearman rho between the singscore (change, T1 to T2) and each outcome; status from limma. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/02_sets.xlsx, change_score.

Change score overview, baseline window: Reactome

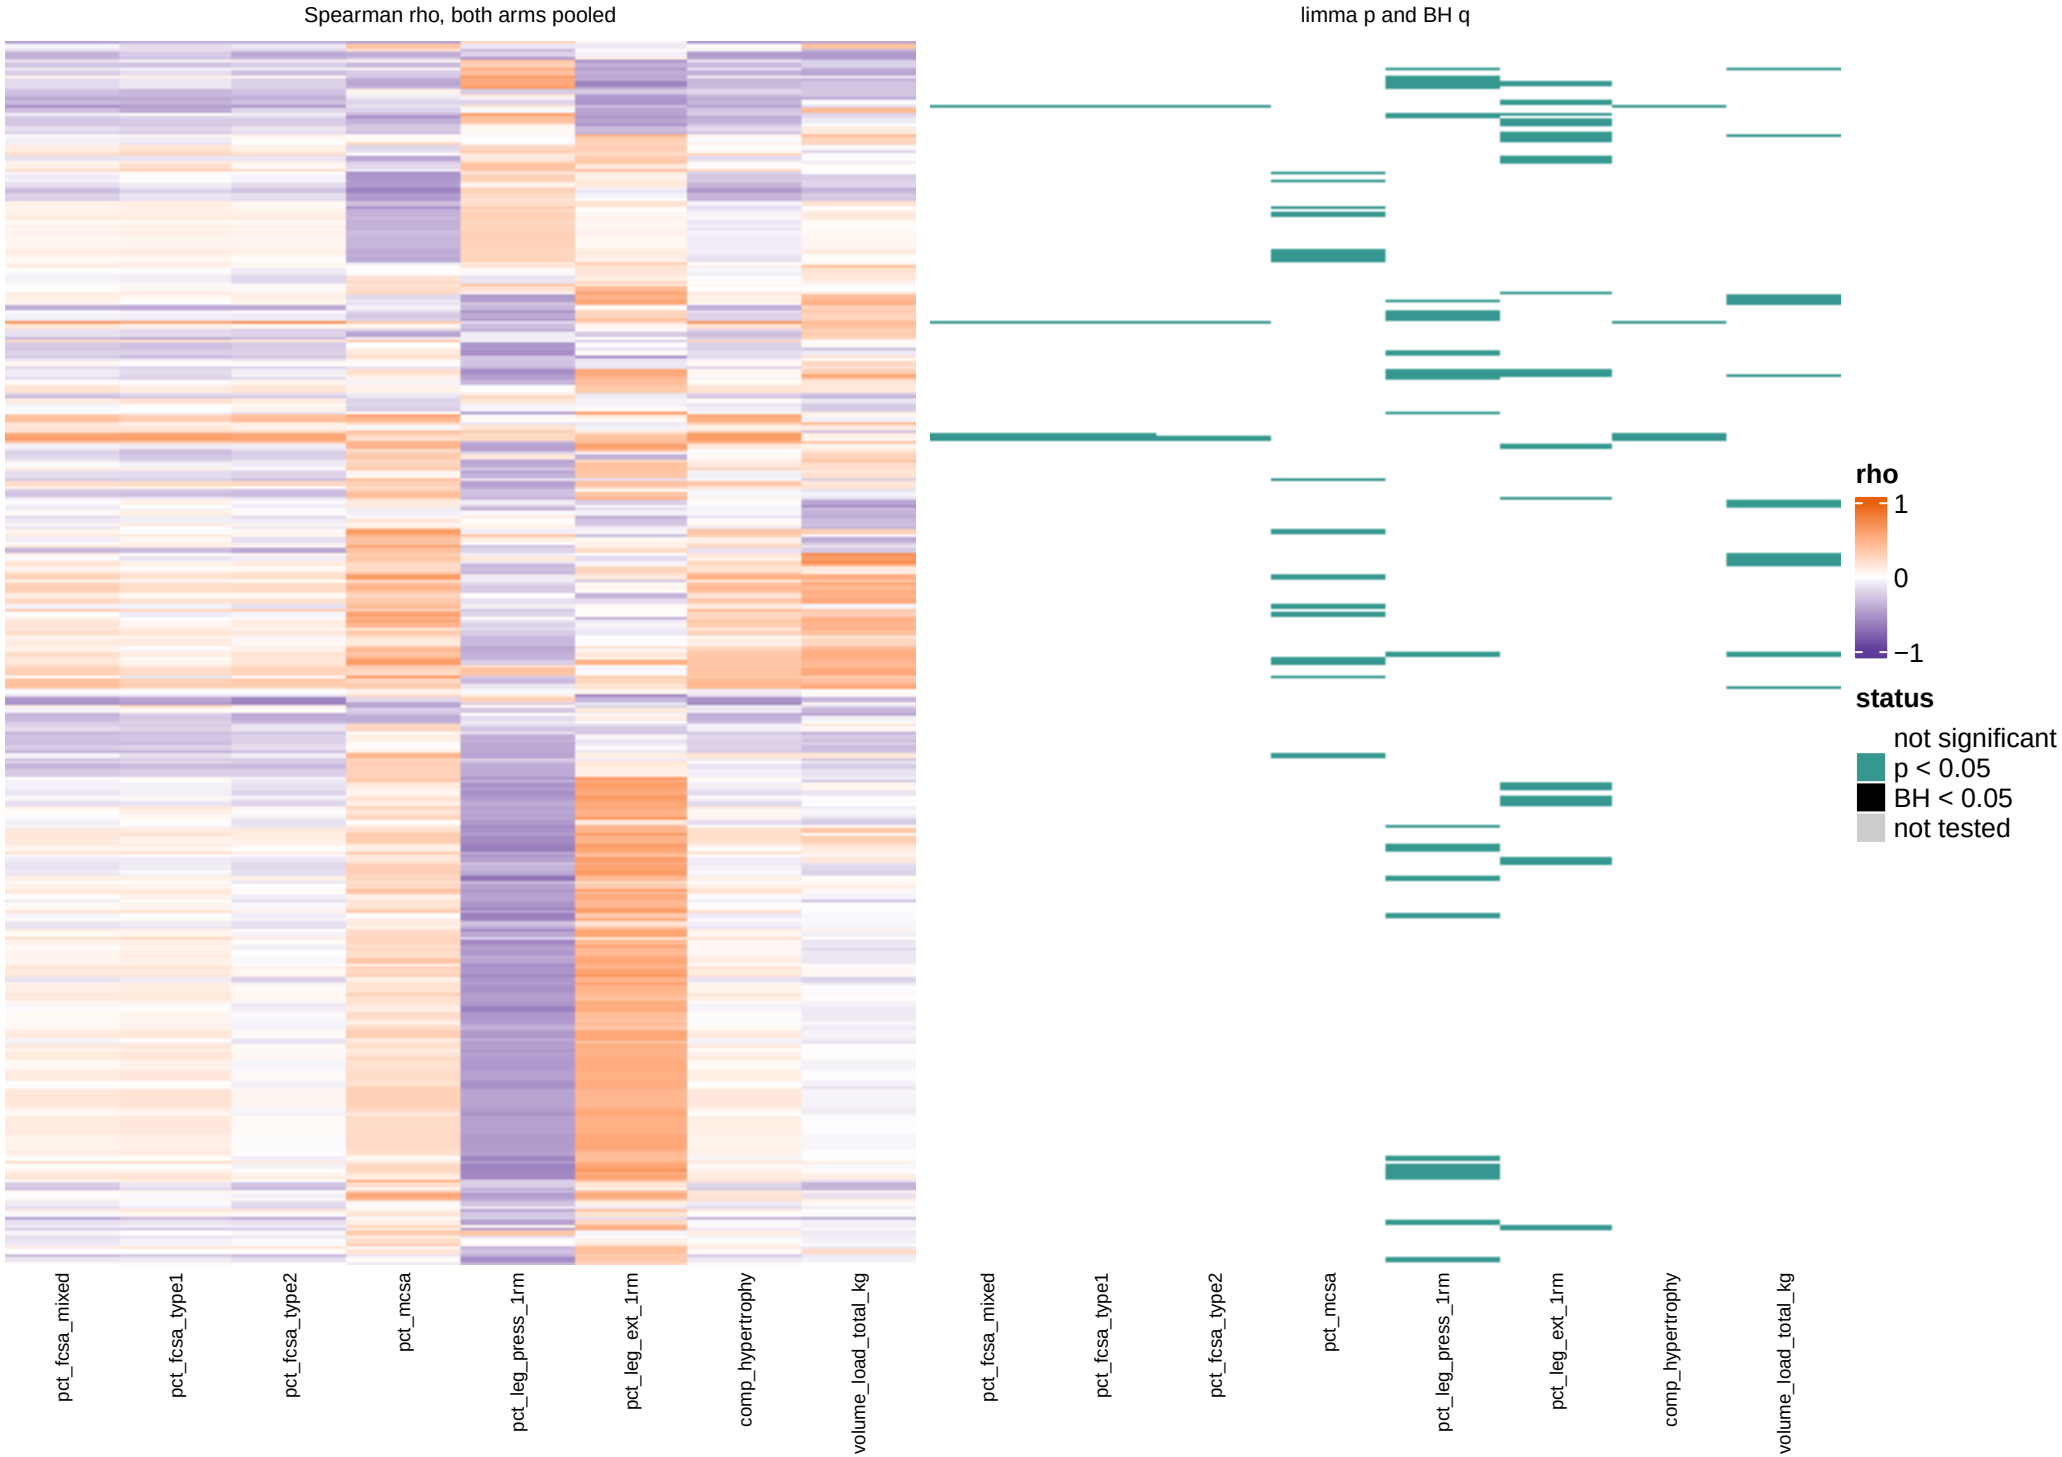


All 328 sets, one row each. Spearman rho between the singscore (T1 level) and each outcome; status from limma. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/02_sets.xlsx, change_score.

Change score overview, acute window: Reactome

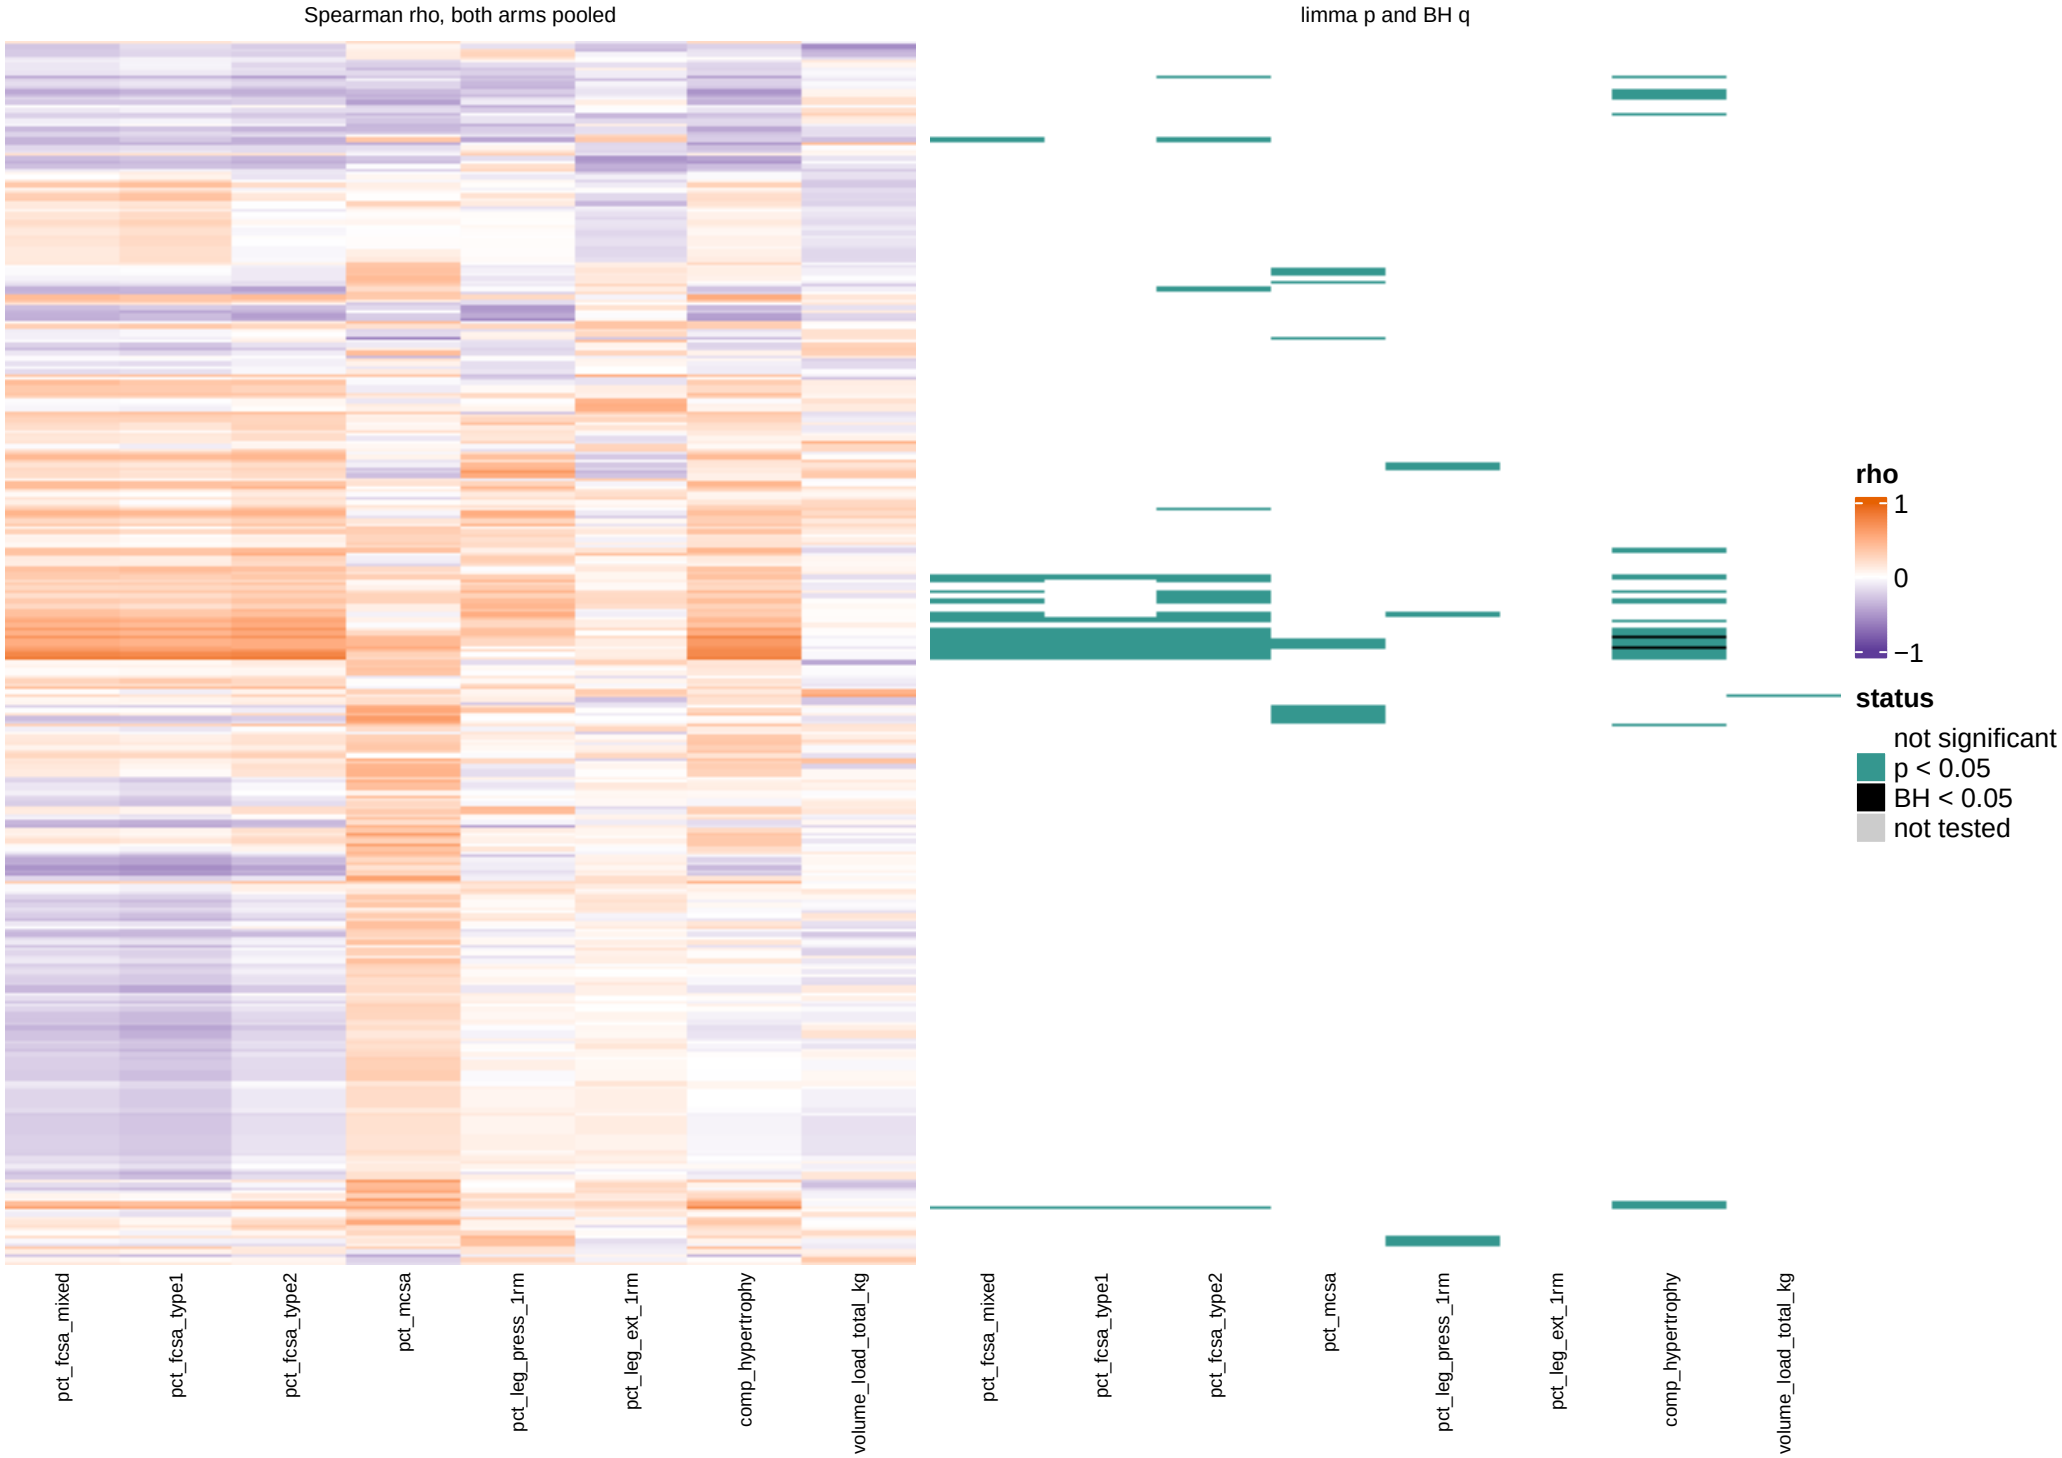


All 328 sets, one row each. Spearman rho between the singscore (change, T2 to T3) and each outcome; status from limma. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/02_sets.xlsx, change_score.

Change score overview, baseline_level window: Reactome

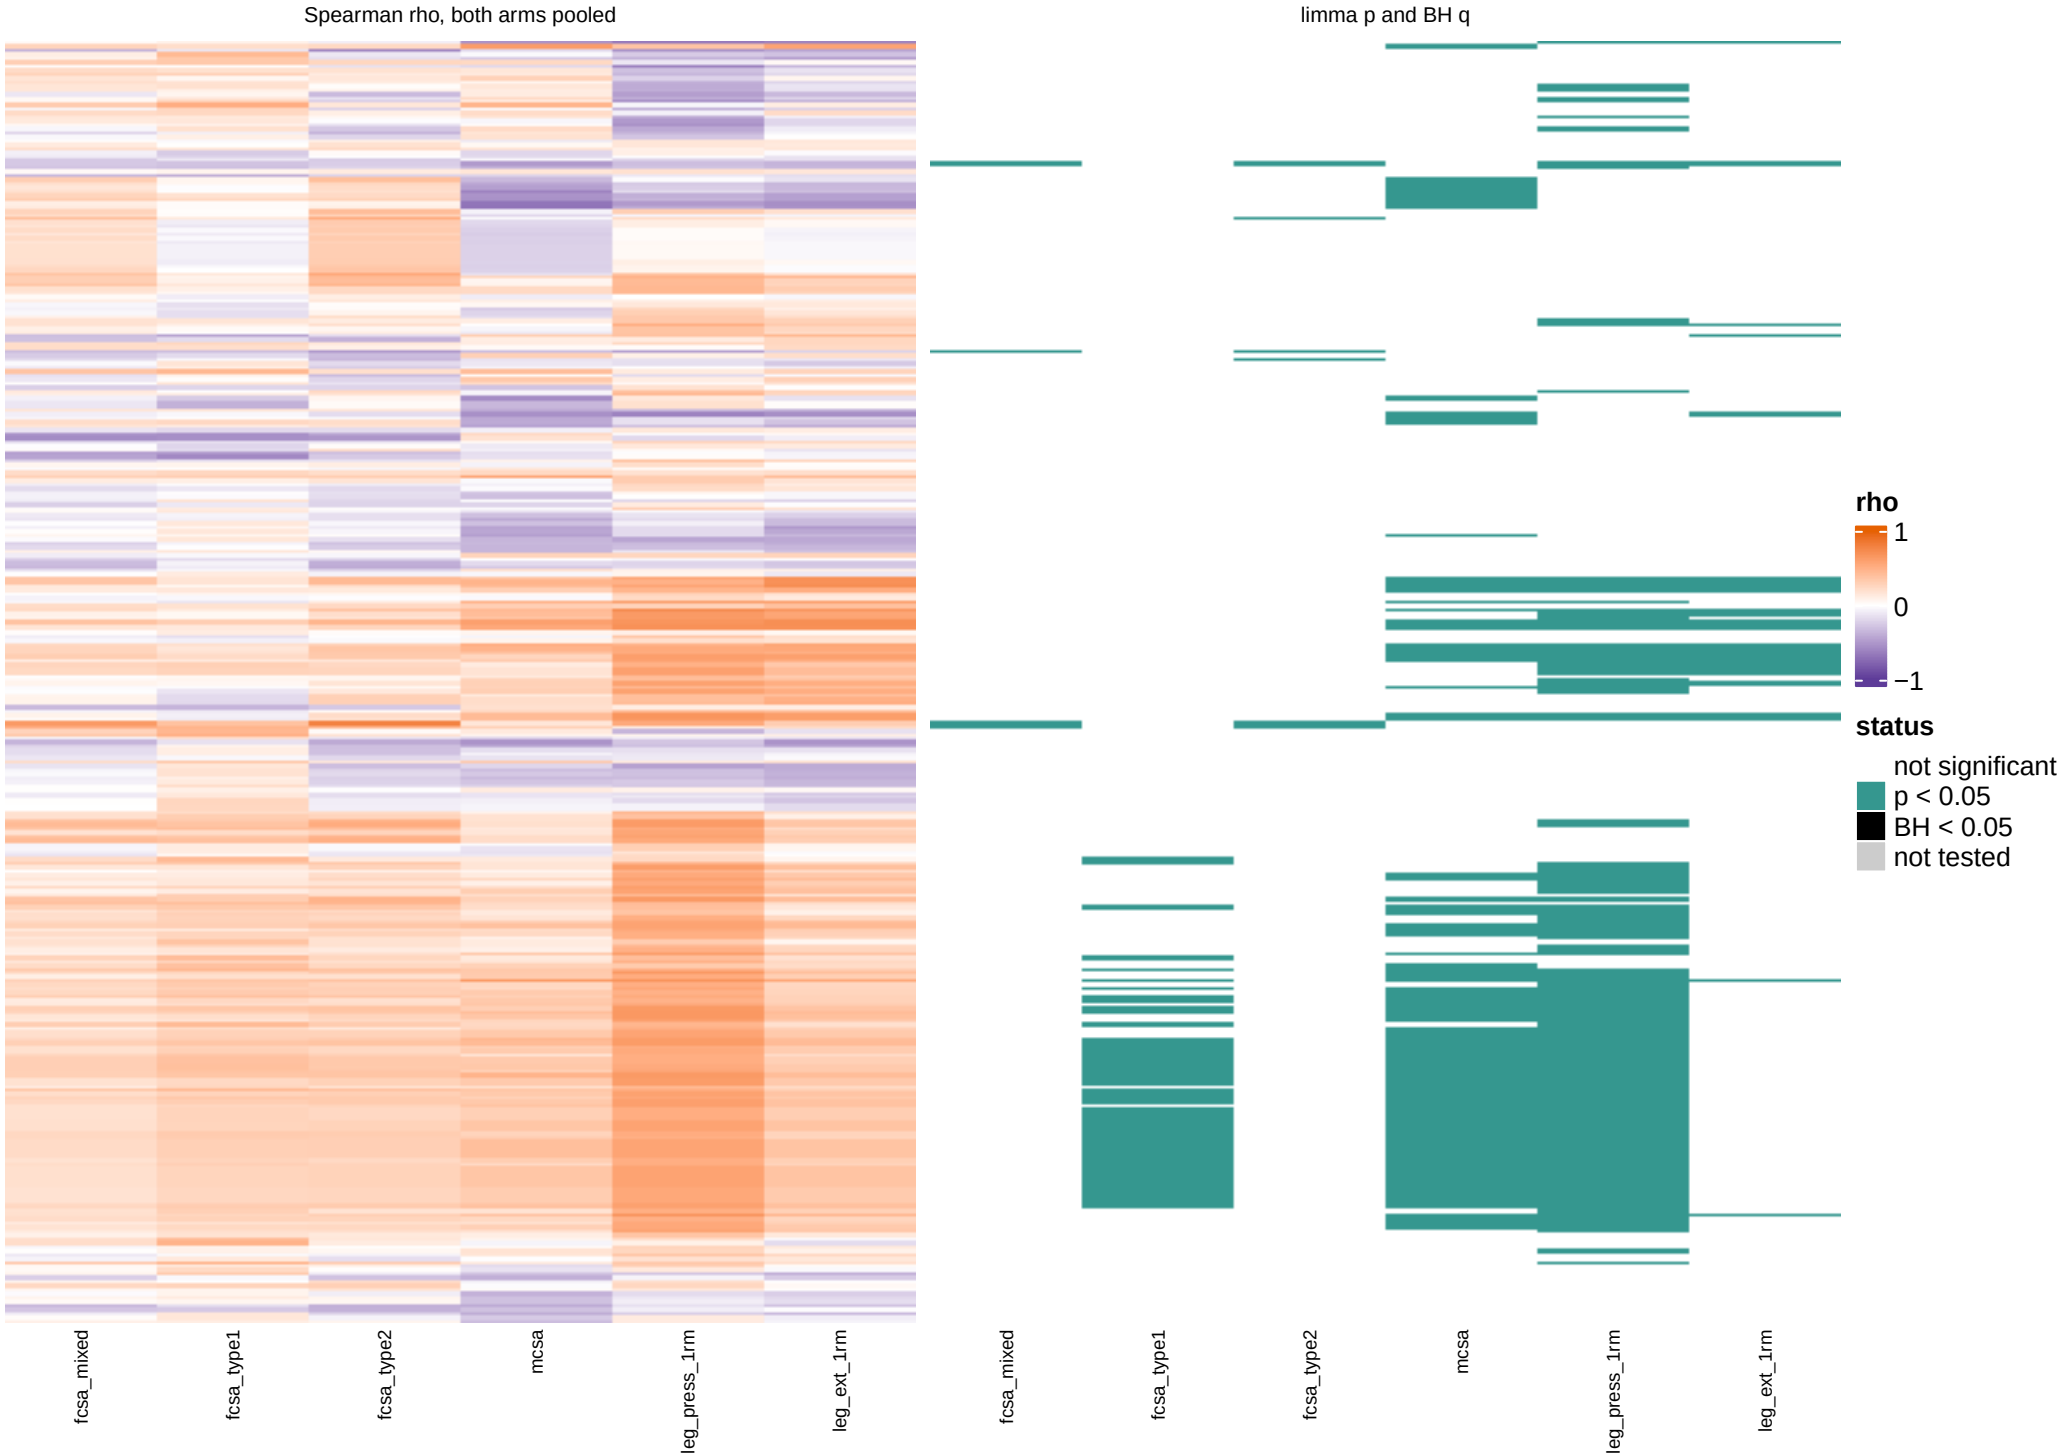


All 328 sets, one row each. Spearman rho between the singscore (T1 level) and each outcome; status from limma. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/02_sets.xlsx, change_score.

Change score overview, post_level window: Reactome

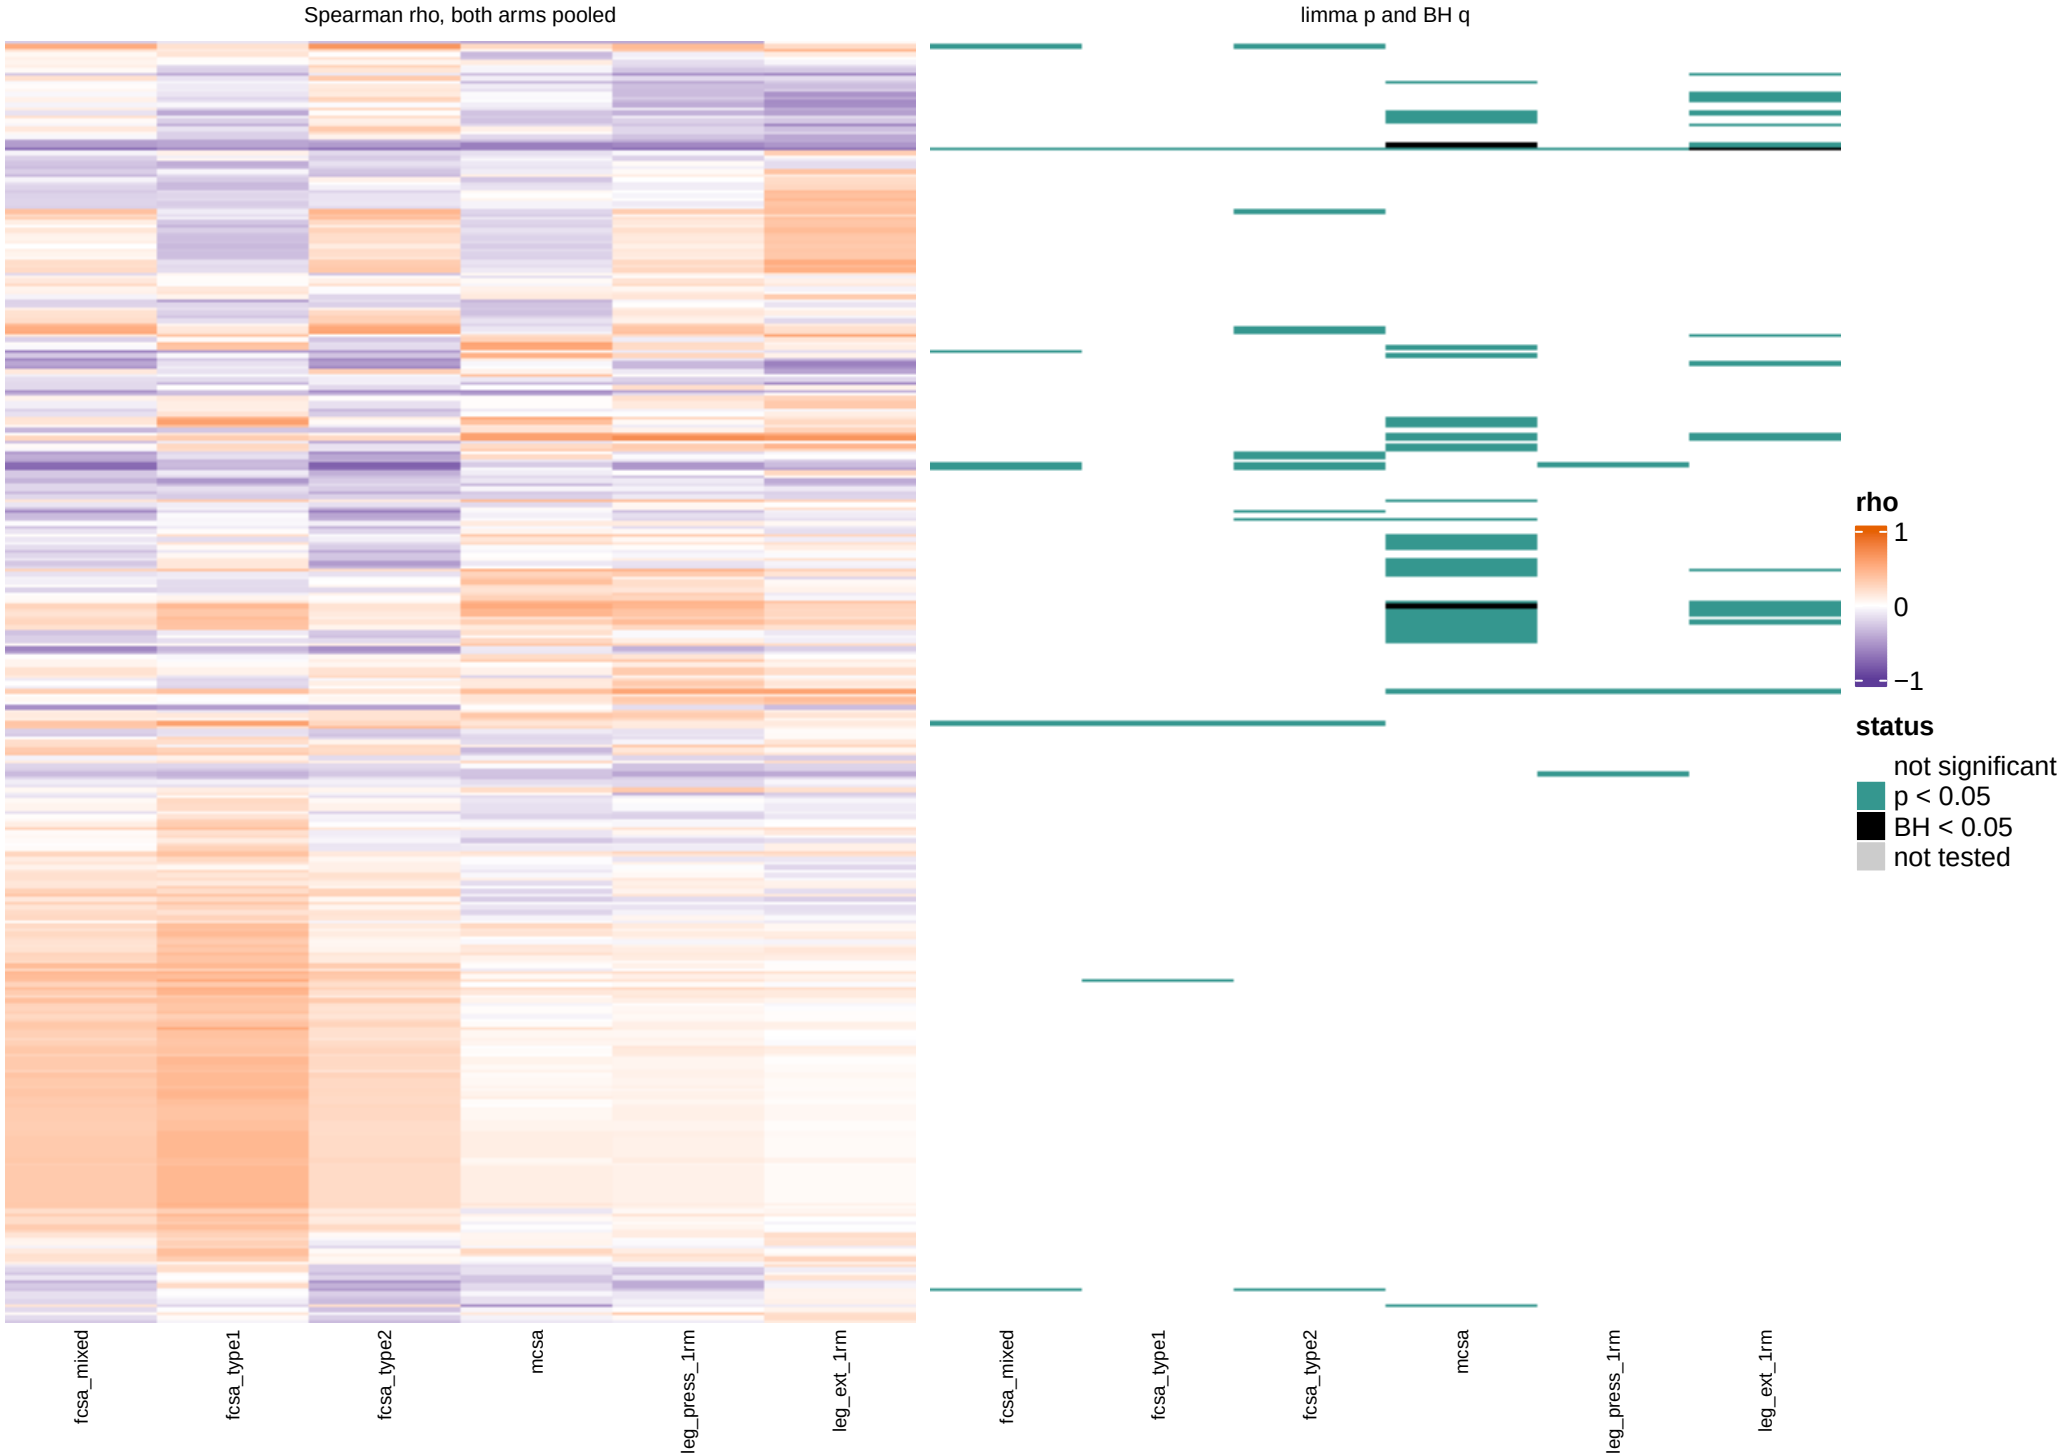


All 328 sets, one row each. Spearman rho between the singscore (T2 level) and each outcome; status from limma. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/02_sets.xlsx, change_score.

Change score overview, post_bout_level window: Reactome

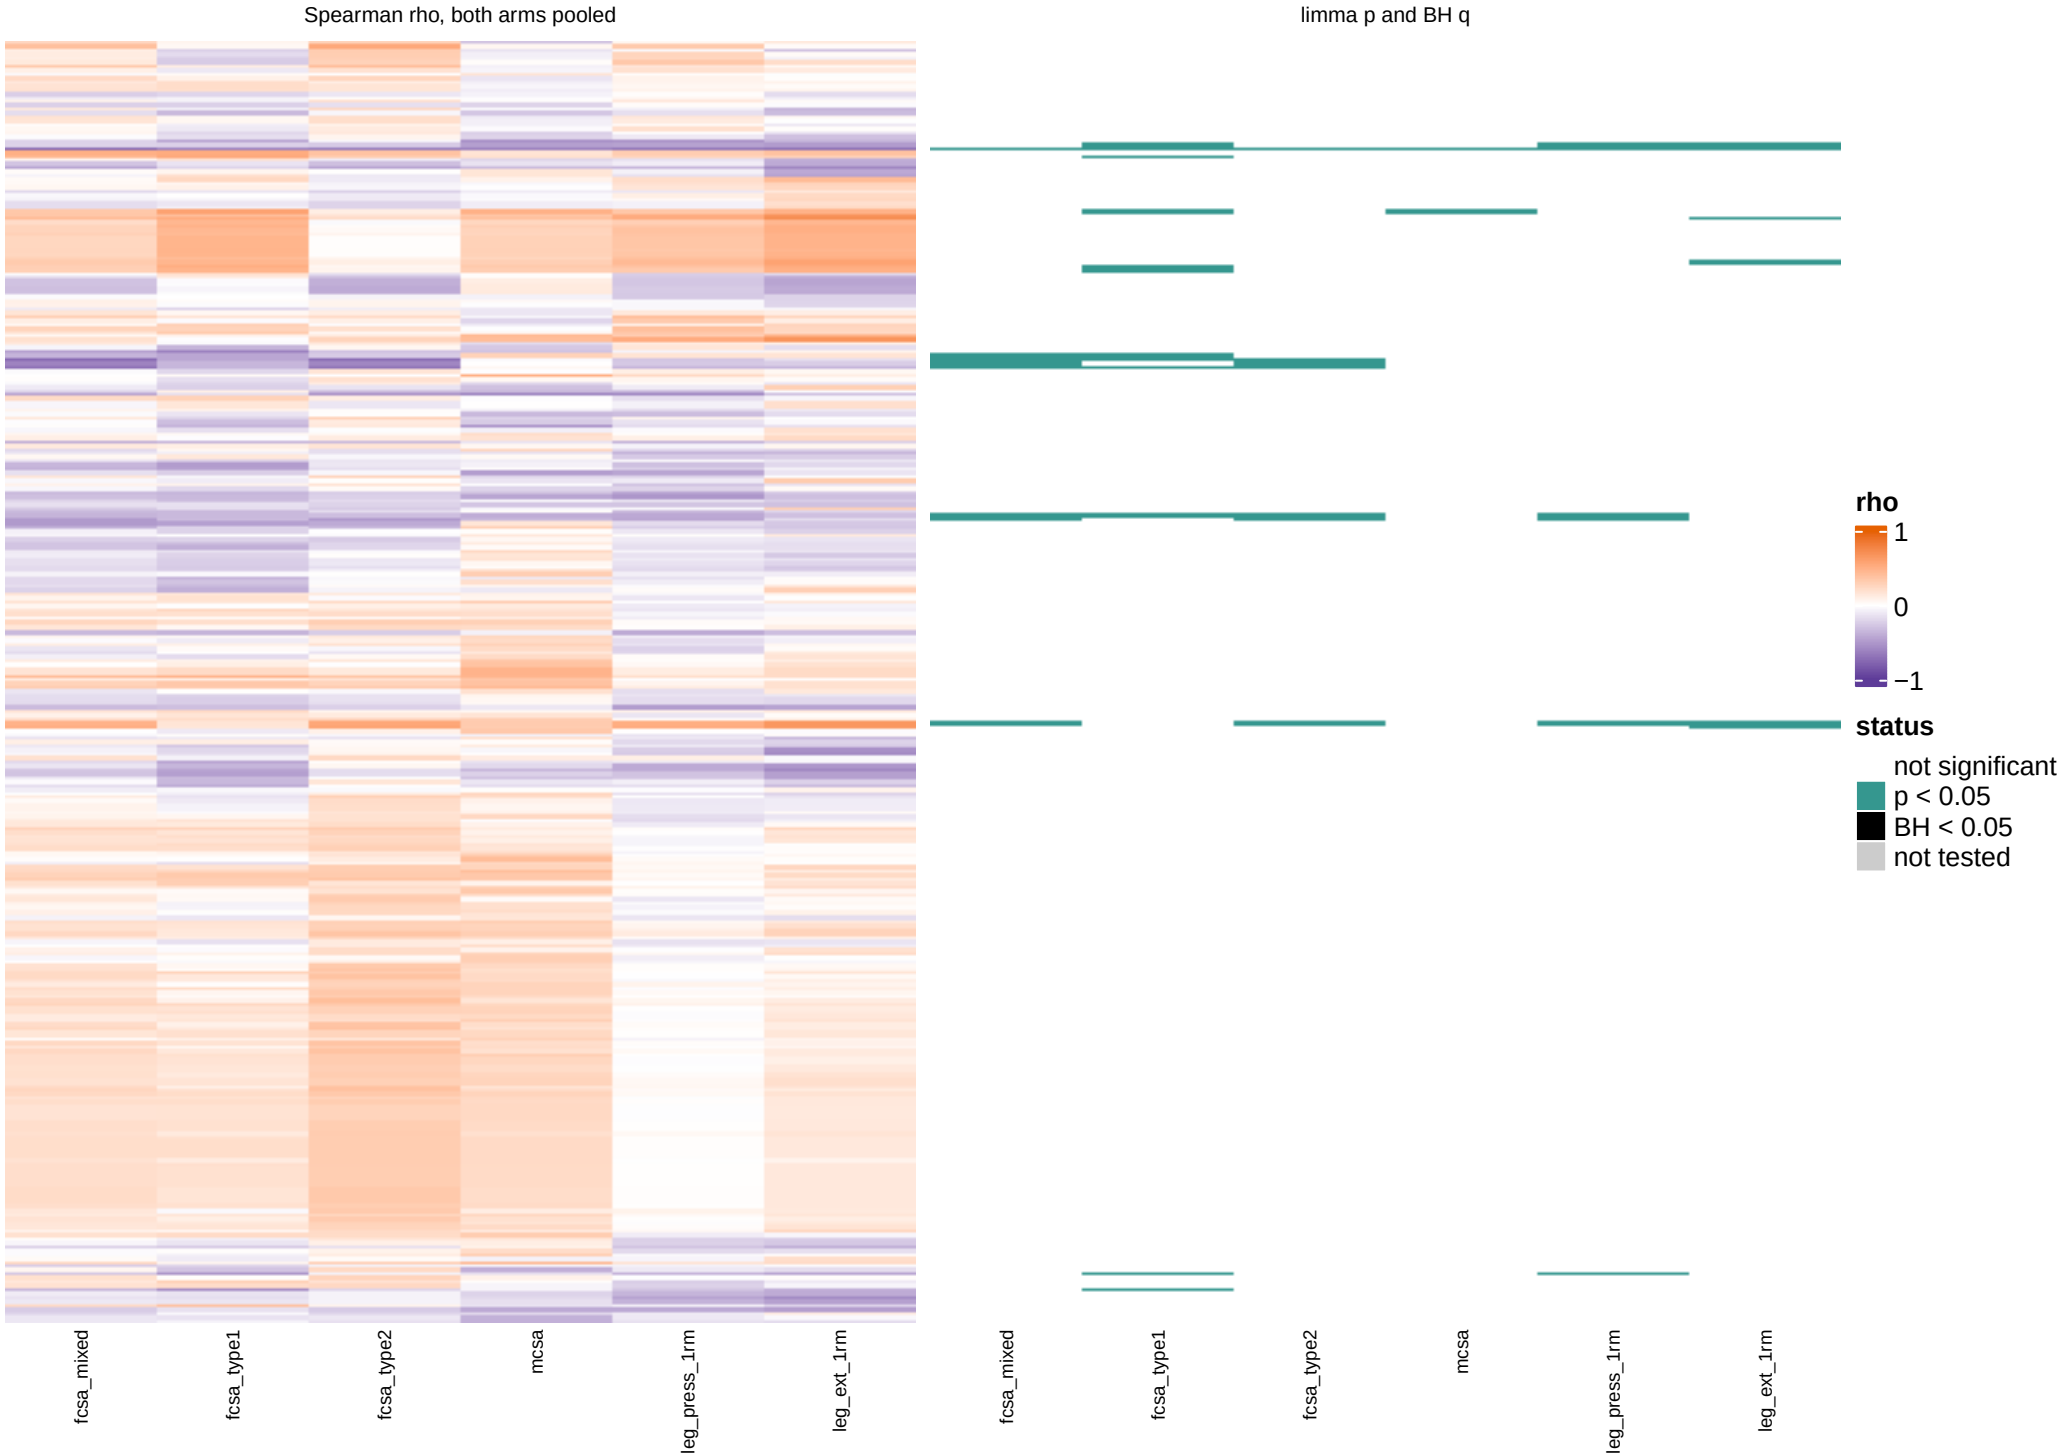


All 328 sets, one row each. Spearman rho between the singscore (T3 level) and each outcome; status from limma. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/02_sets.xlsx, change_score.

Sample model overview: KEGG_Legacy

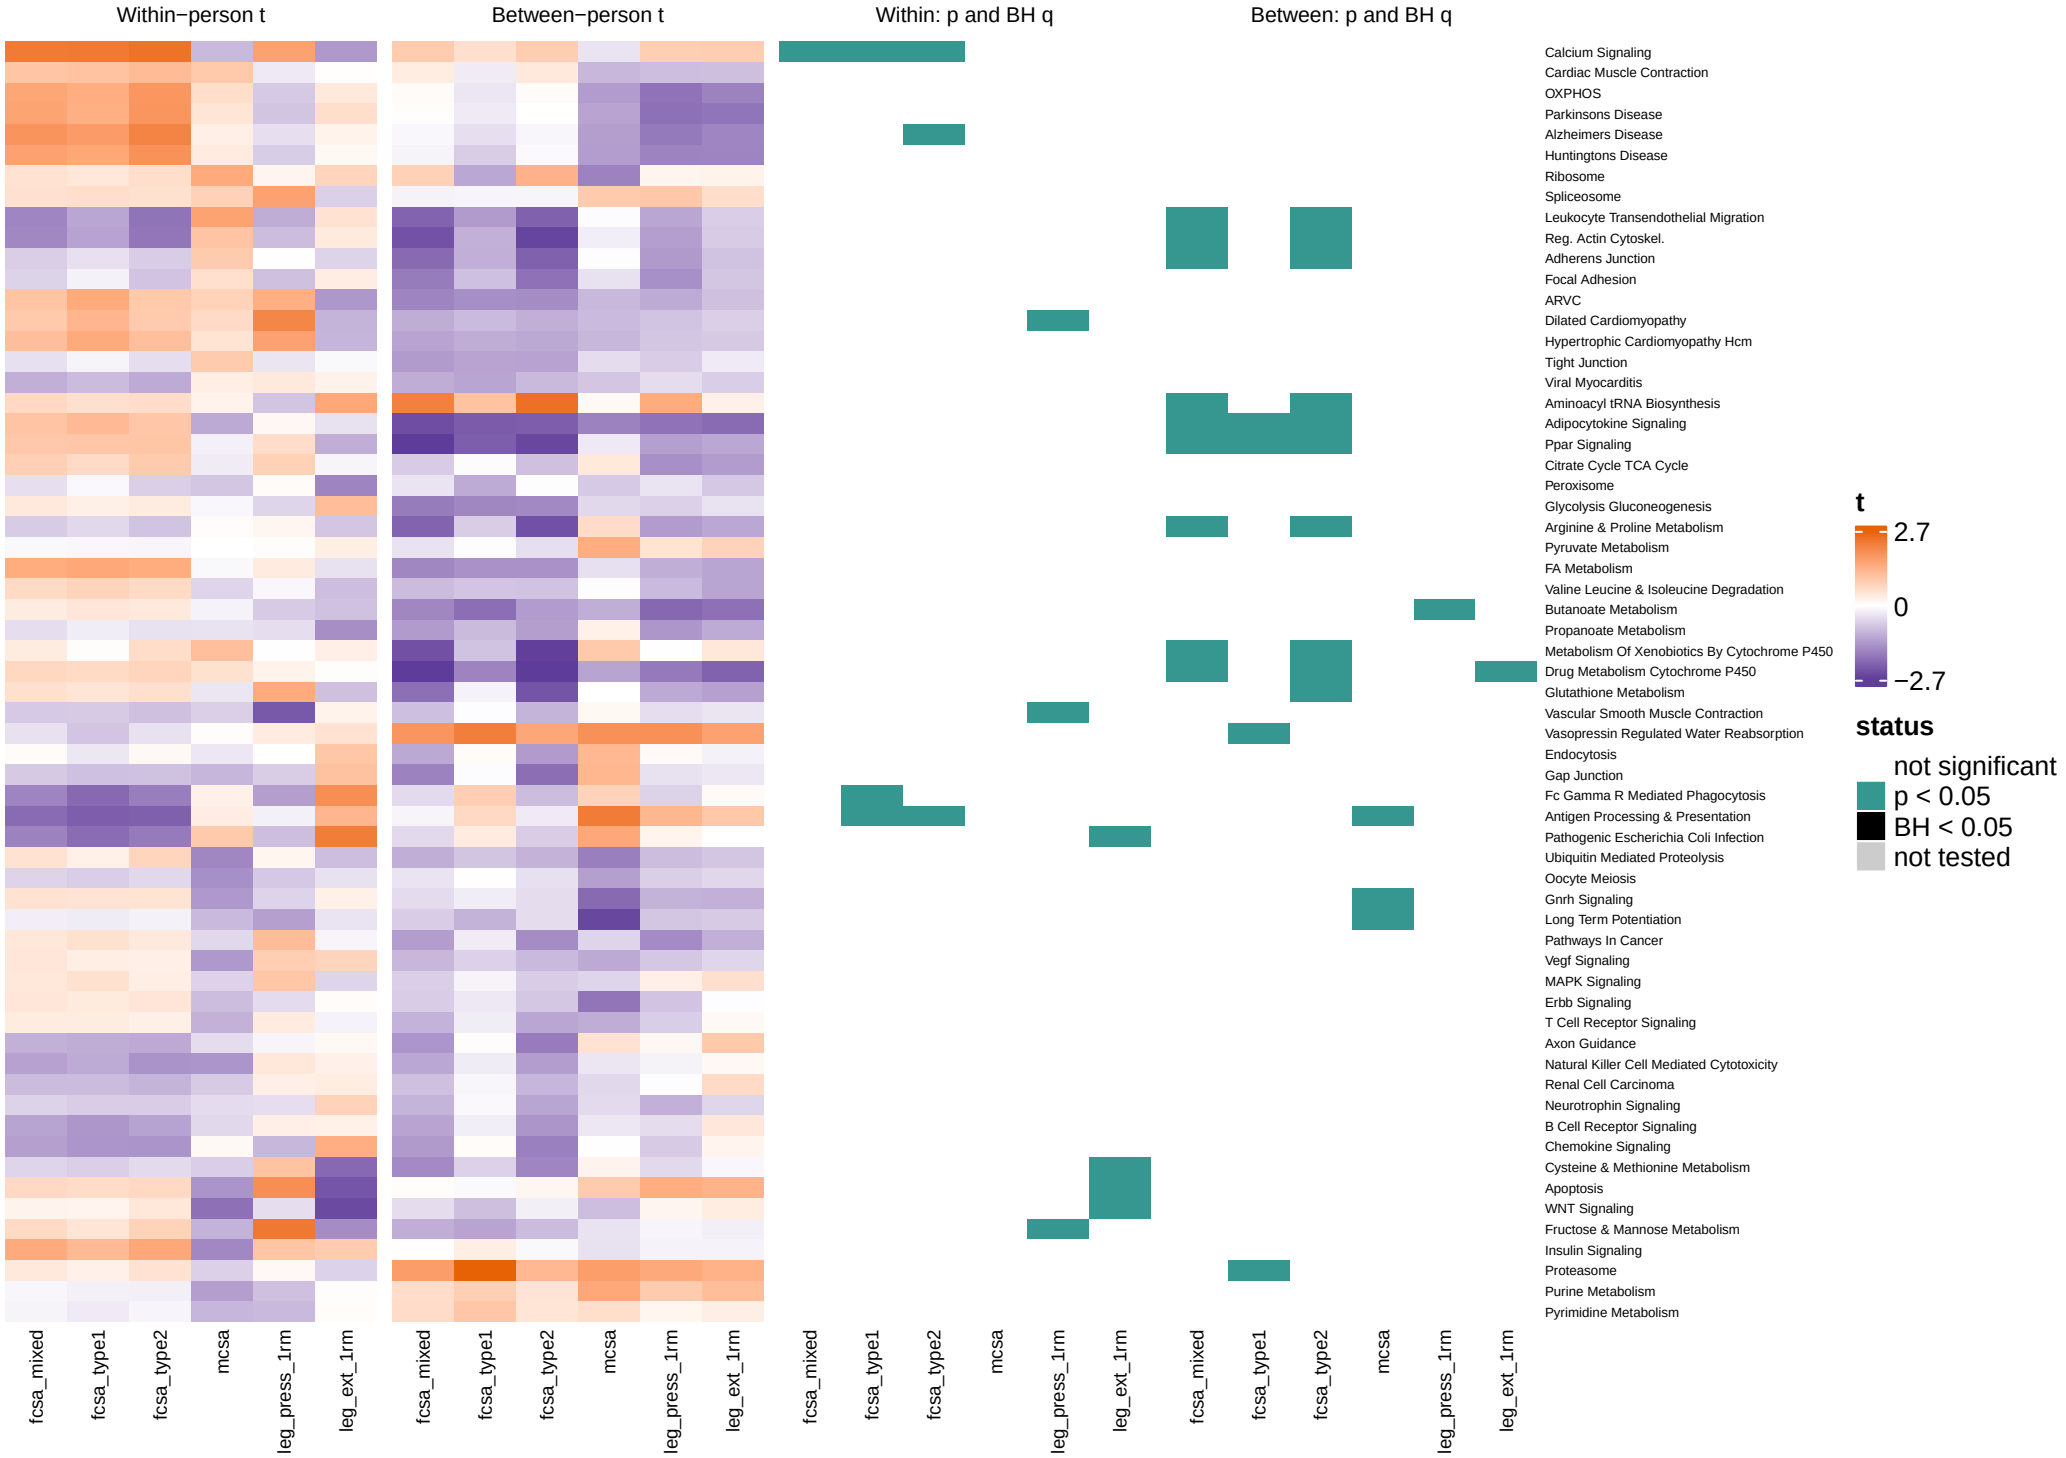


All 62 sets, one row each. Moderated t of the within and between terms, abundance ~ timepoint + between + within, subject blocked. Colours stop at the 99th percentile of |t|, 2.7. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/02_sets.xlsx, model.

Change score overview, training window: KEGG_Legacy

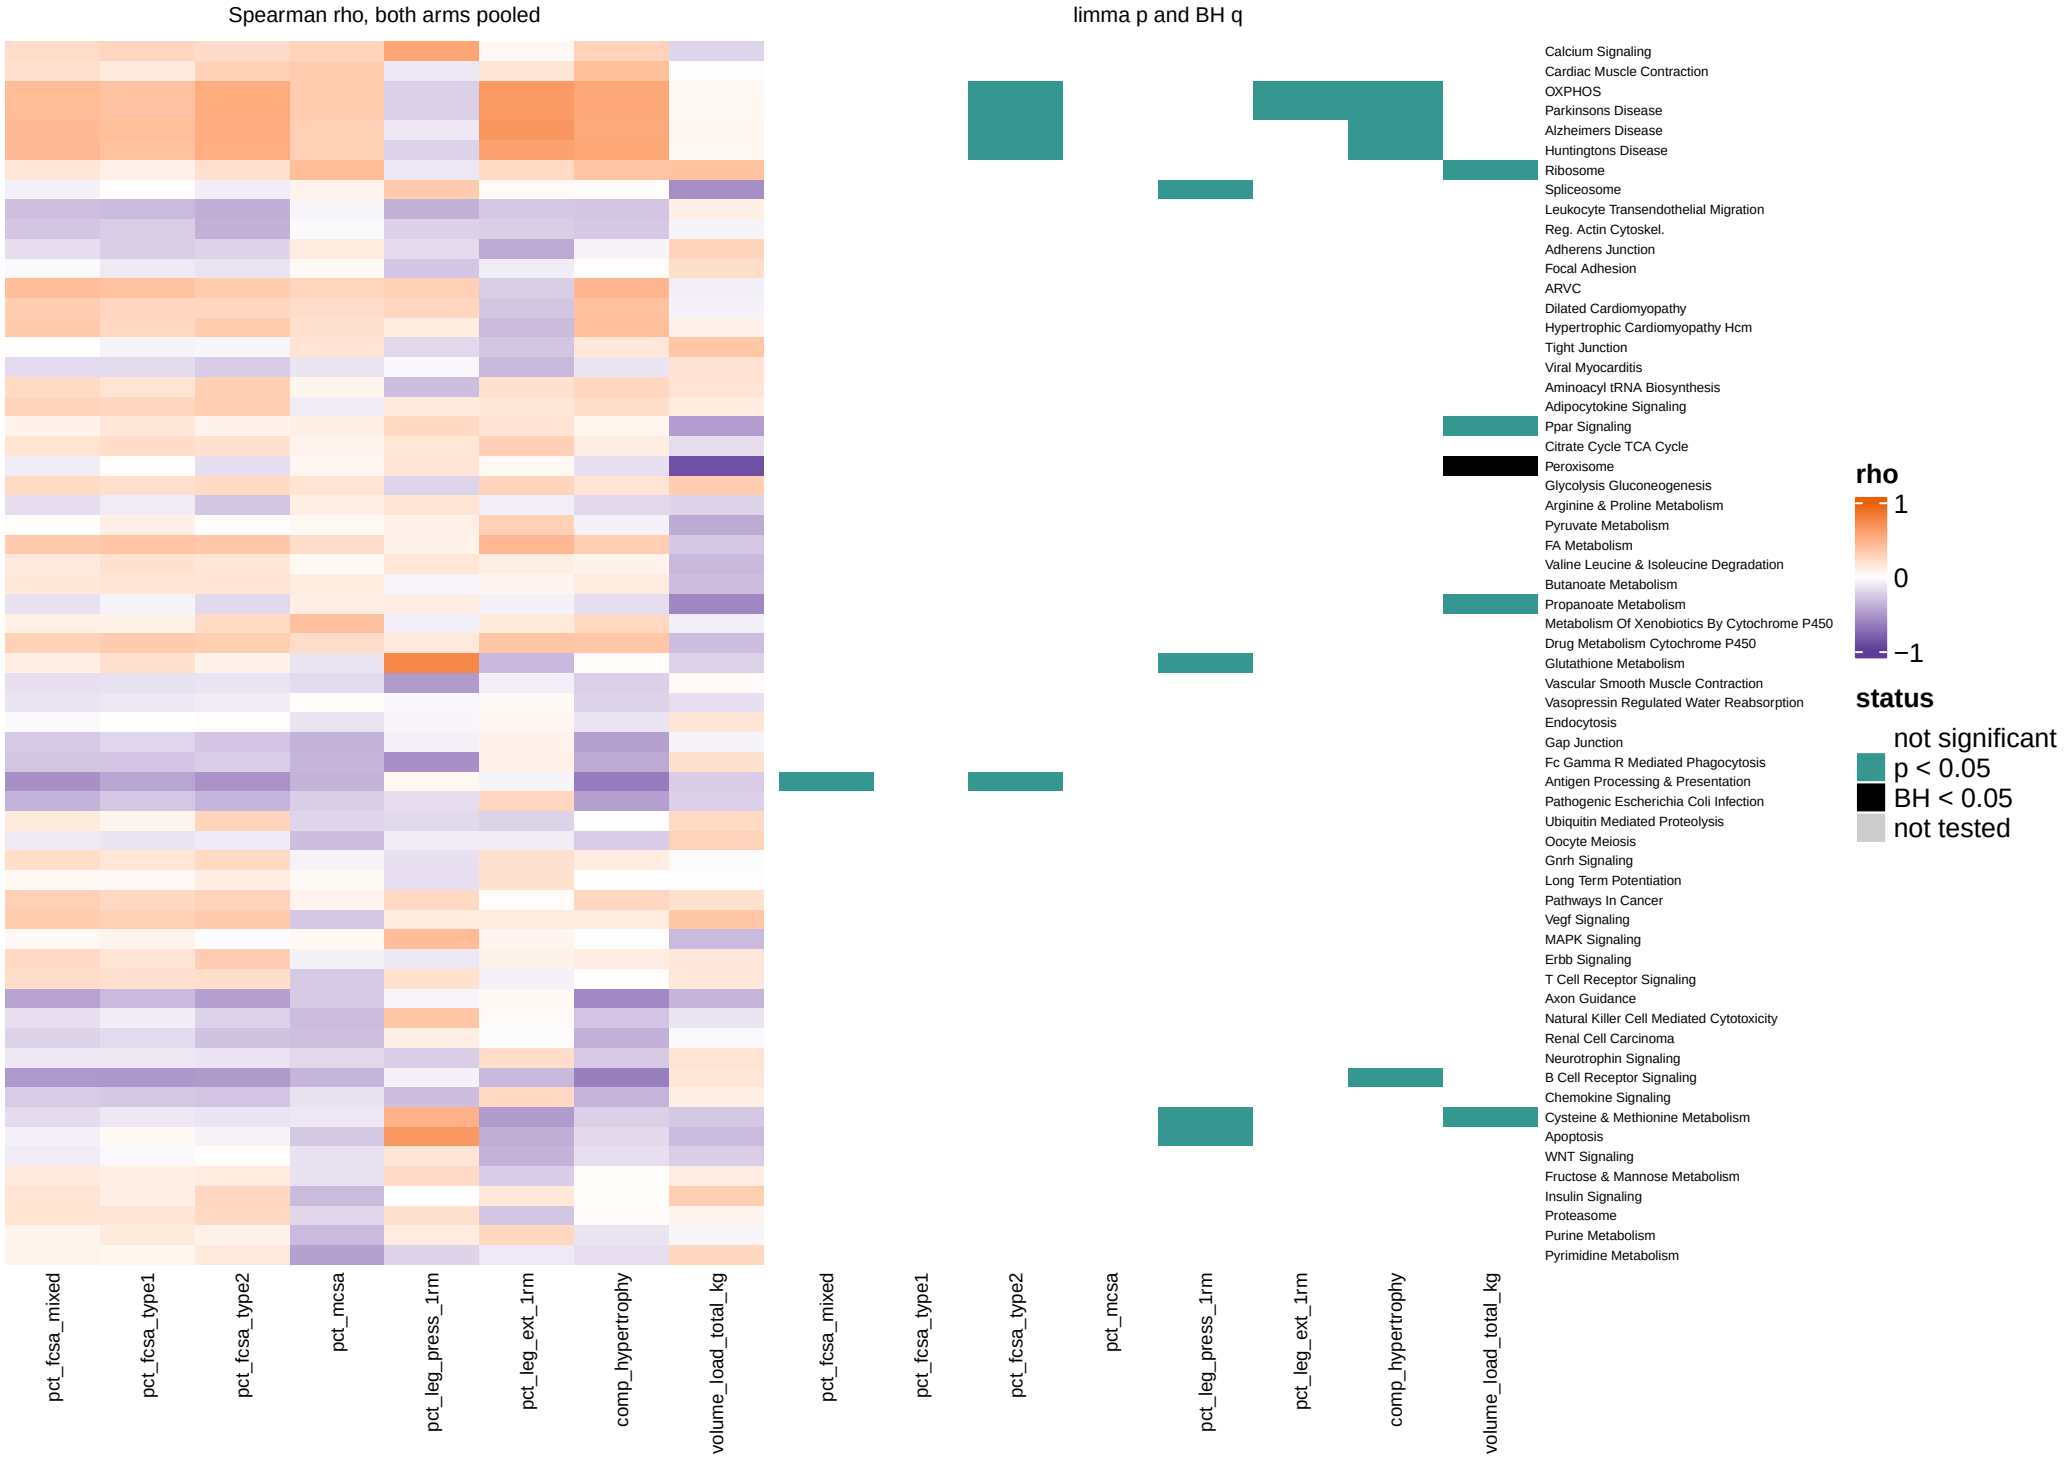

All 62 sets, one row each. Spearman rho between the singscore (change, T1 to T2) and each outcome; status from limma. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/02_sets.xlsx, change_score.

Change score overview, baseline window: KEGG_Legacy

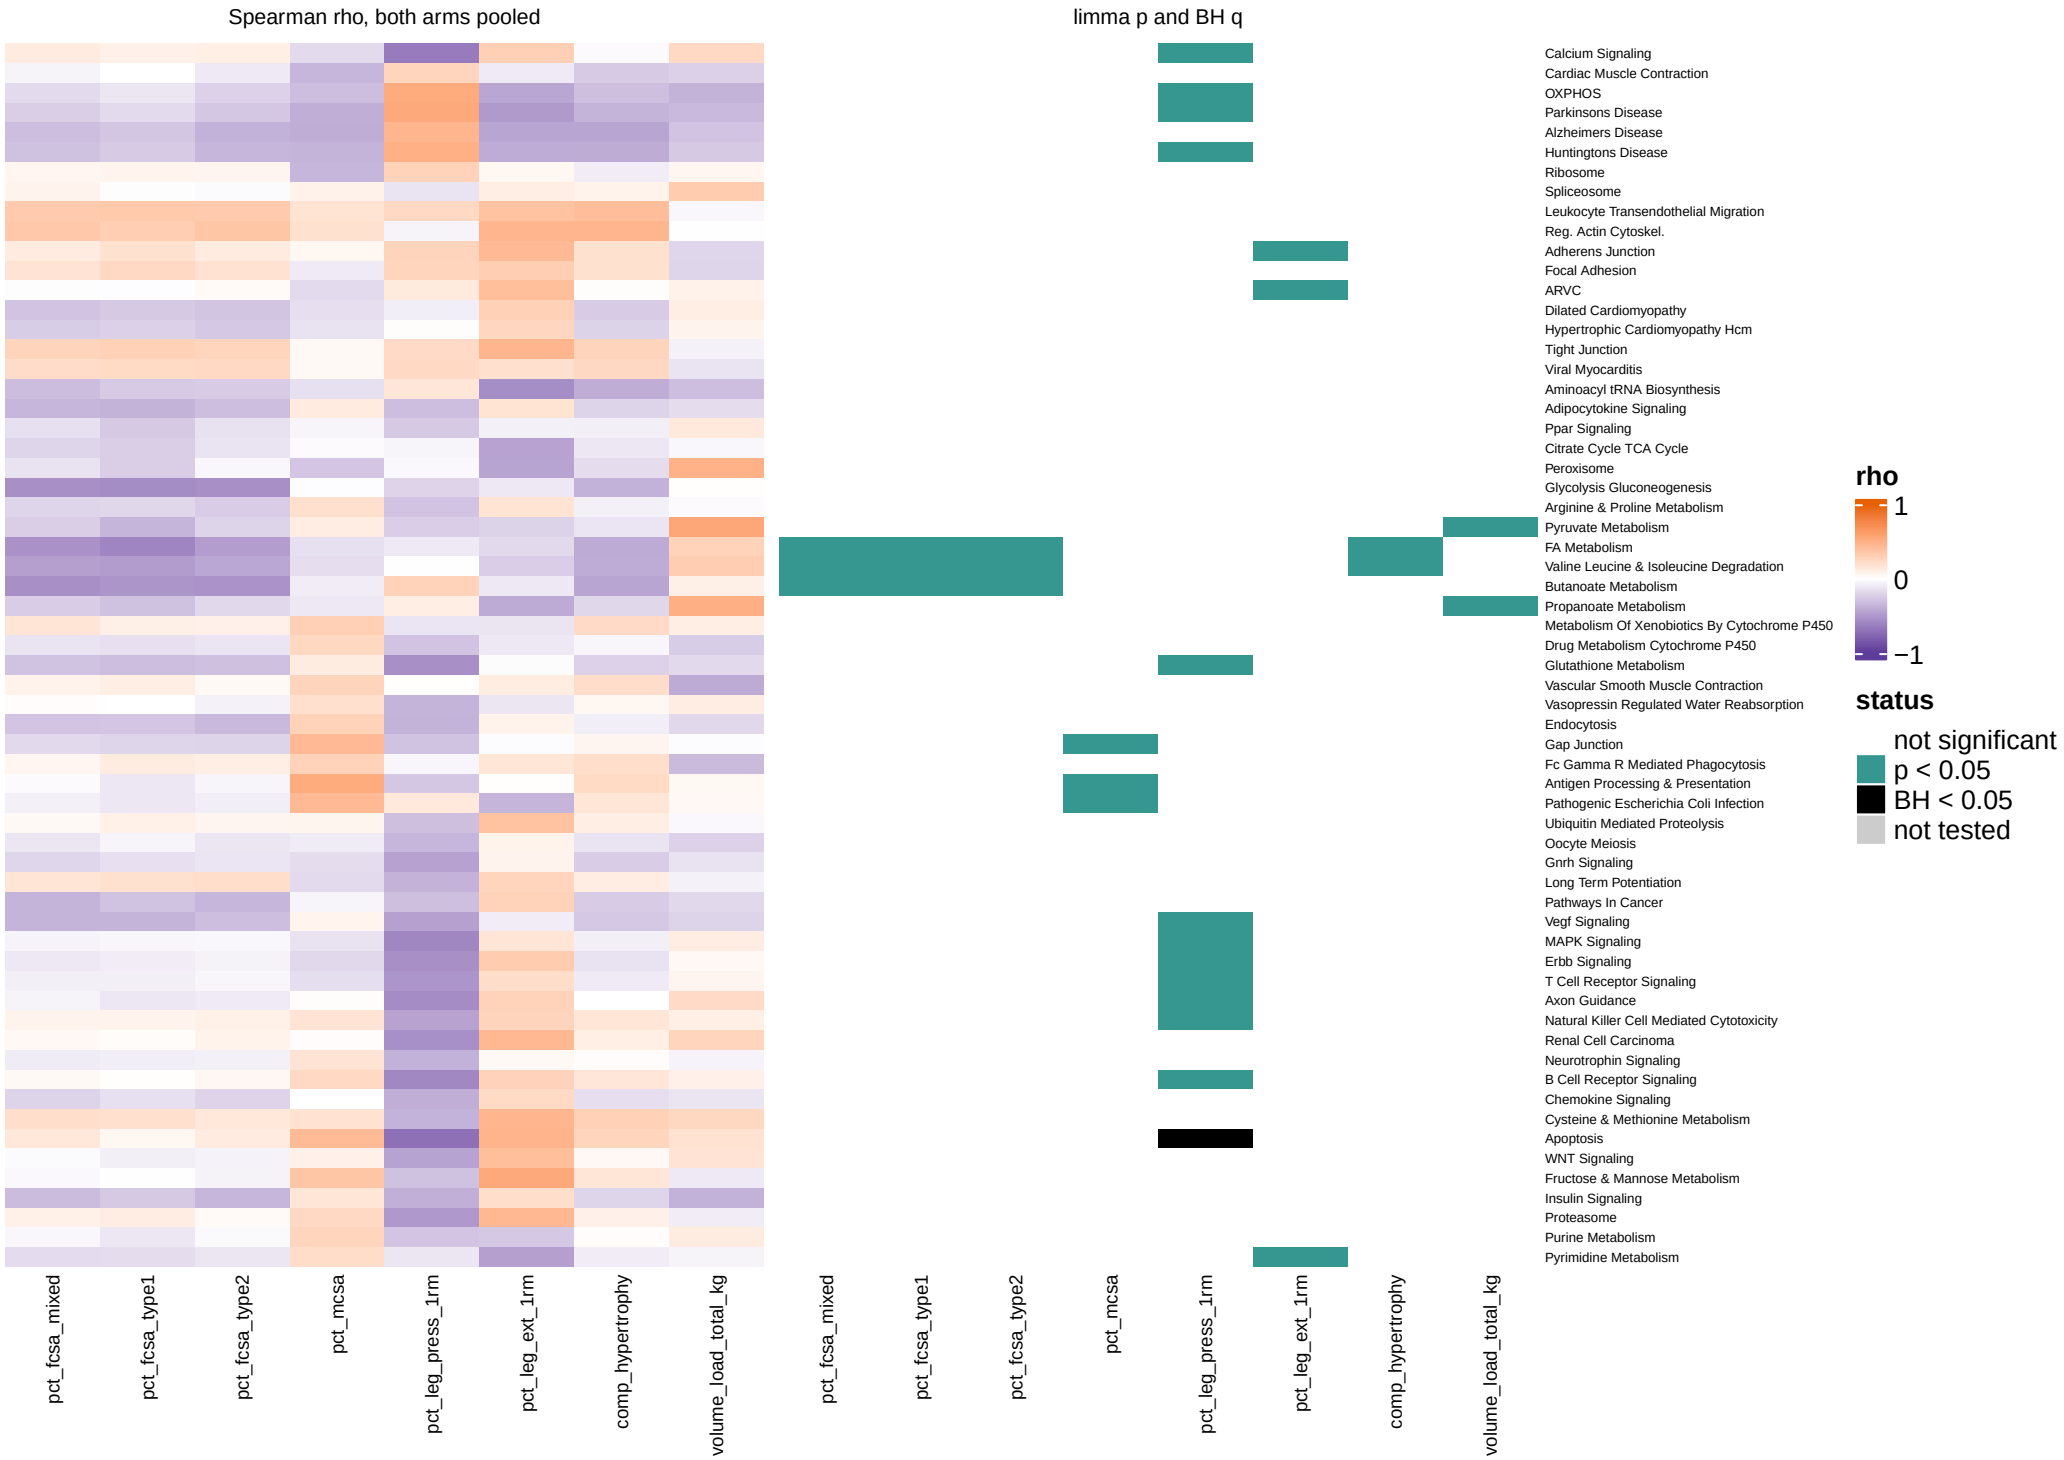


All 62 sets, one row each. Spearman rho between the singscore (T1 level) and each outcome; status from limma. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/02_sets.xlsx, change_score.

Change score overview, acute window: KEGG_Legacy




All 62 sets, one row each. Spearman rho between the singscore (change, T2 to T3) and each outcome; status from limma. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/02_sets.xlsx, change_score.

Change score overview, baseline_level window: KEGG_Legacy

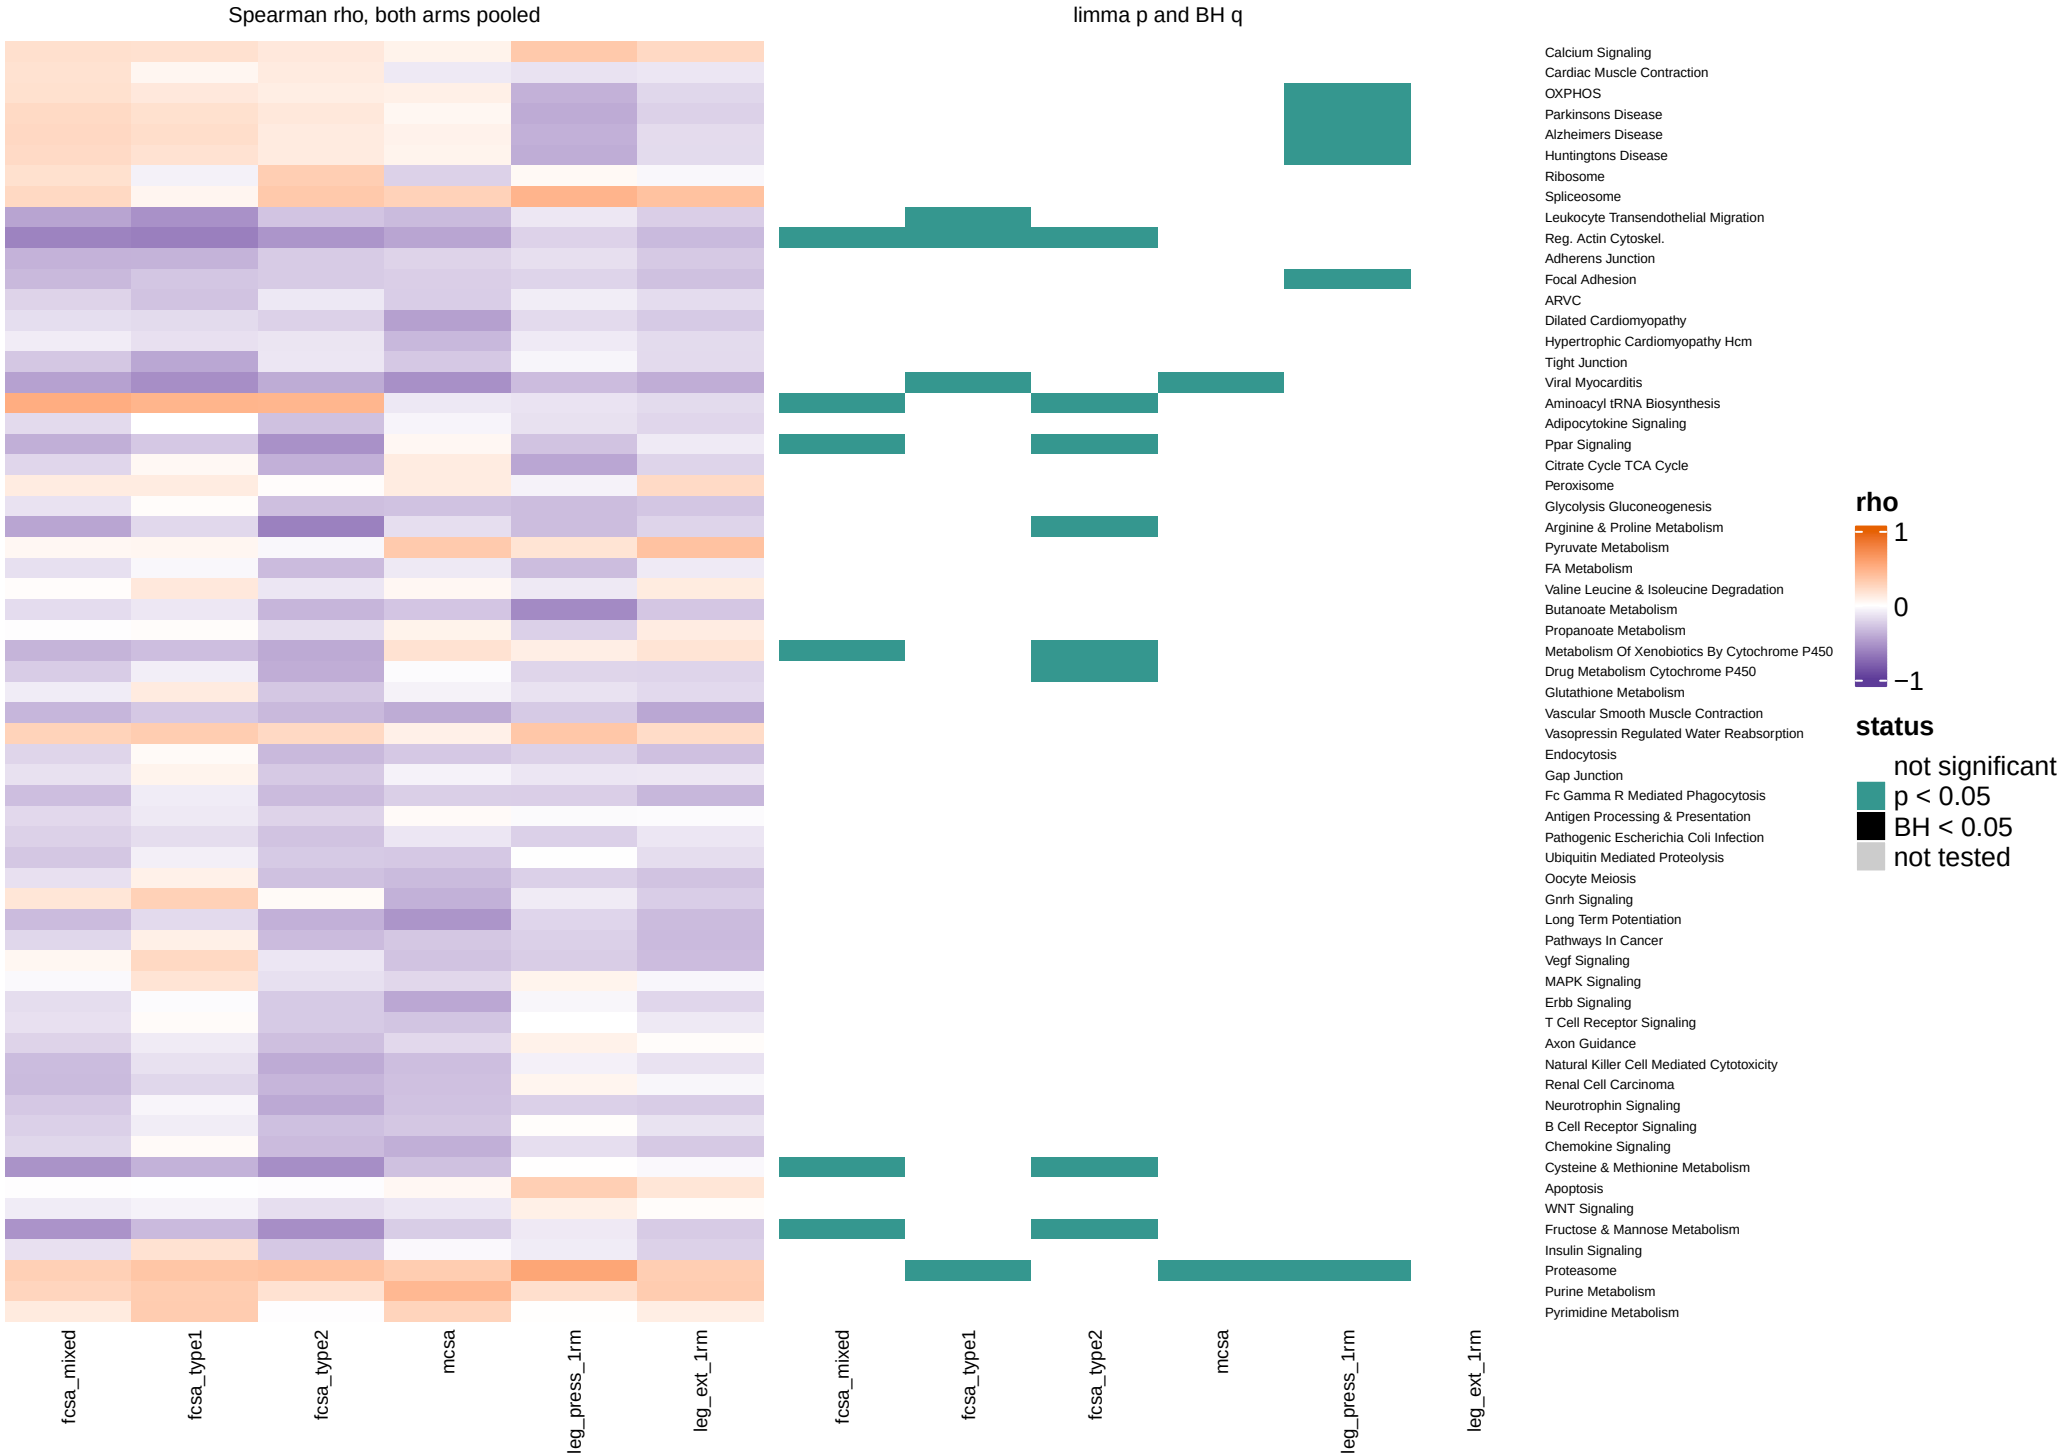


All 62 sets, one row each. Spearman rho between the singscore (T1 level) and each outcome; status from limma. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/02_sets.xlsx, change_score.

Change score overview, post_level window: KEGG_Legacy

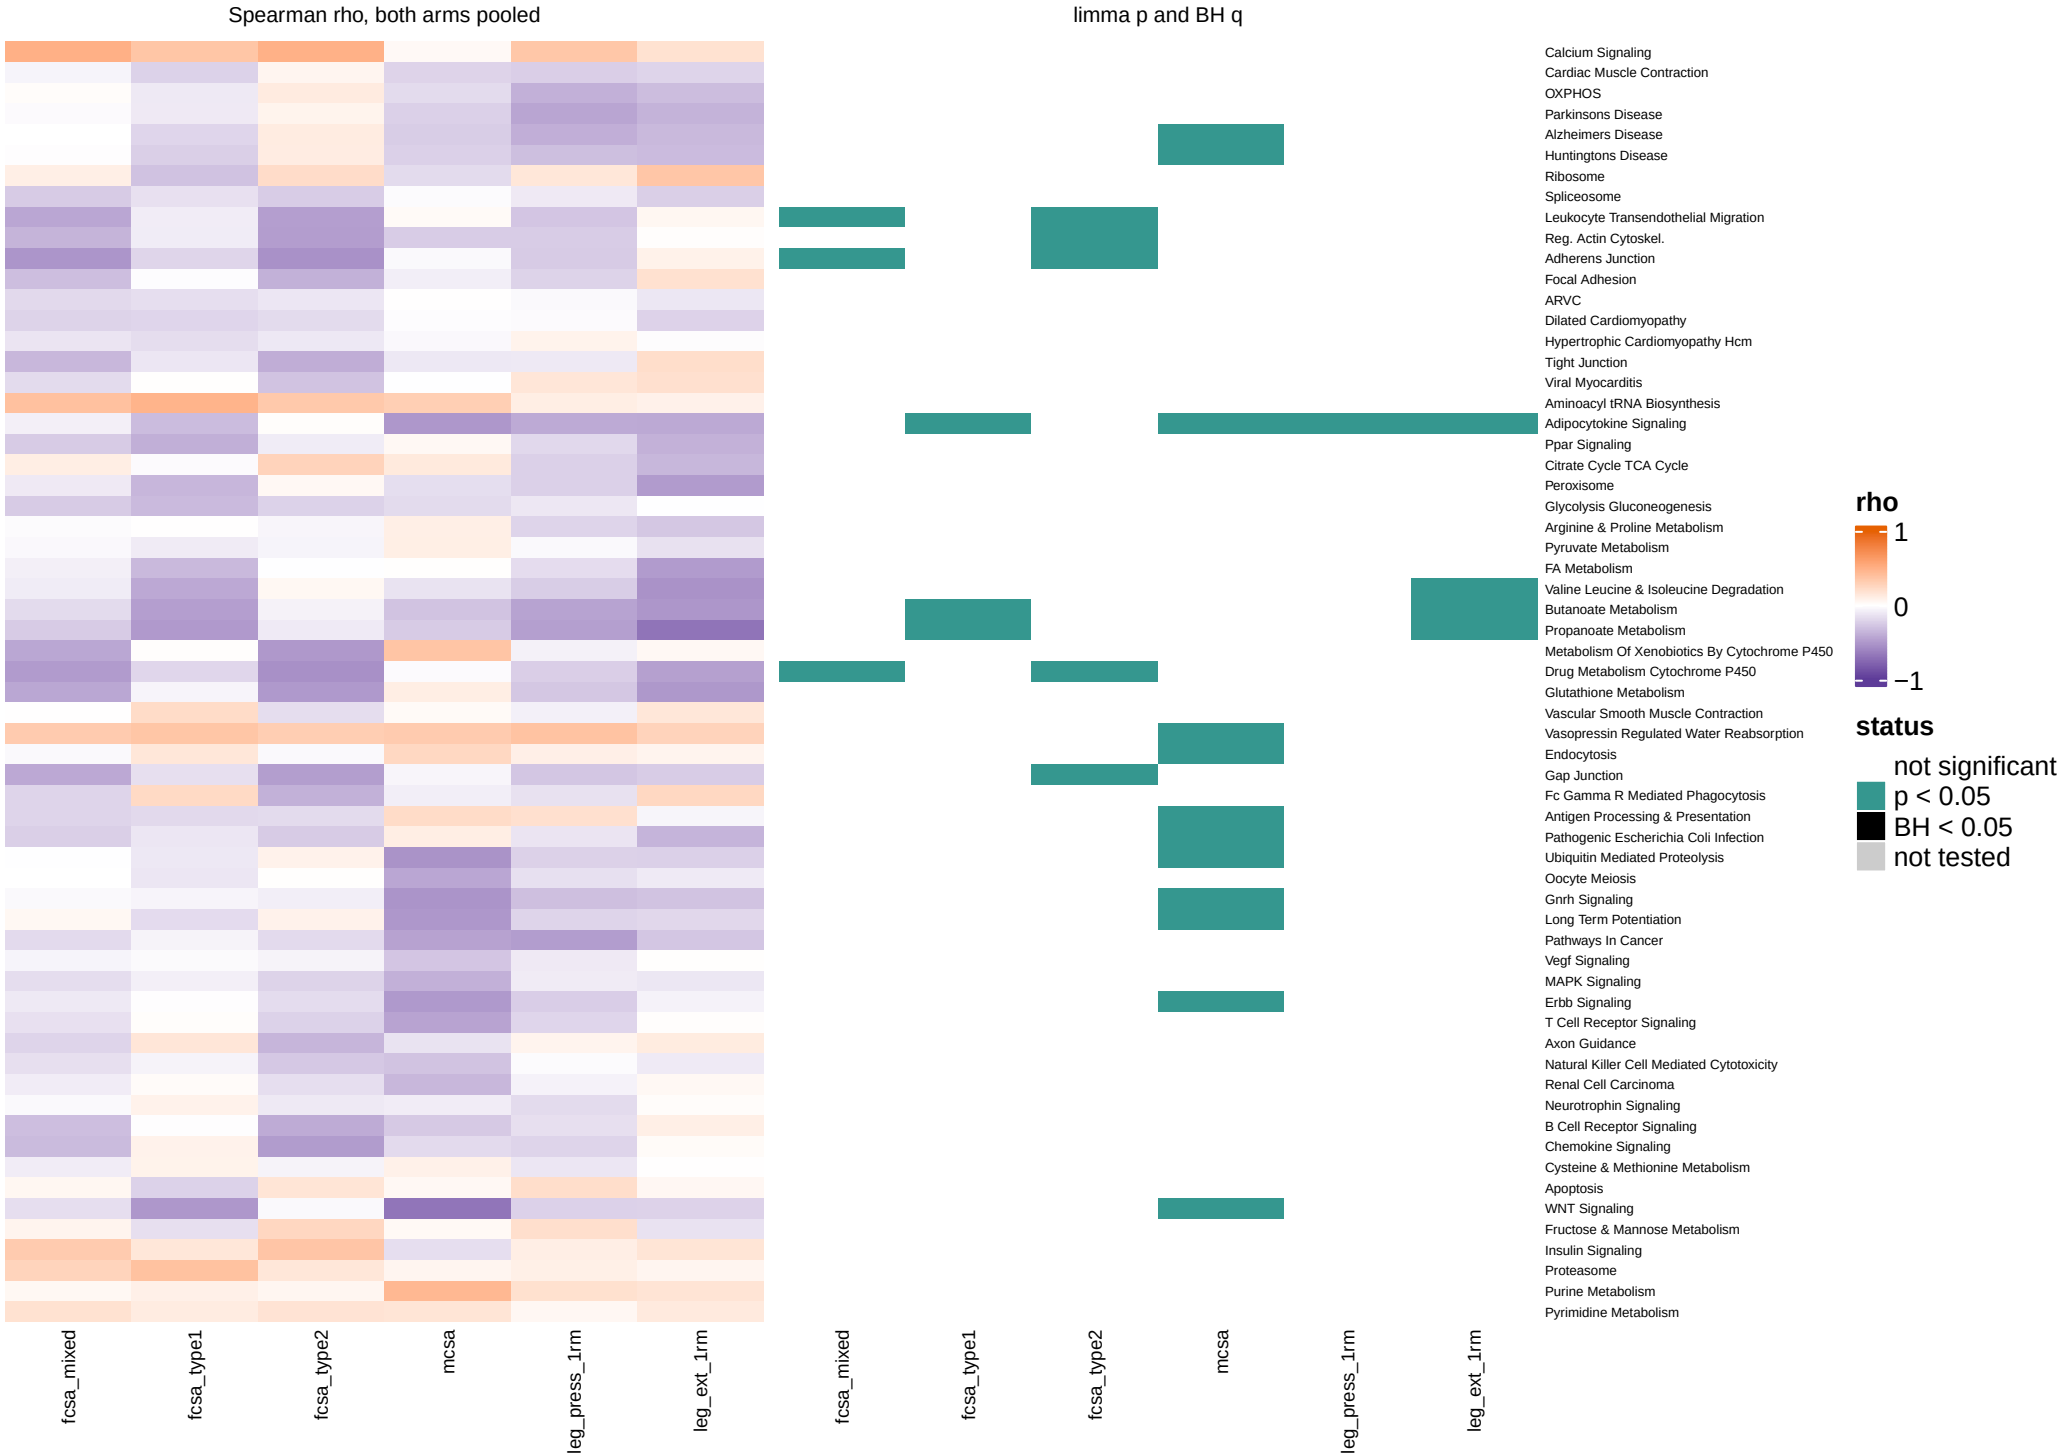


All 62 sets, one row each. Spearman rho between the singscore (T2 level) and each outcome; status from limma. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/02_sets.xlsx, change_score.

Change score overview, post_bout_level window: KEGG_Legacy

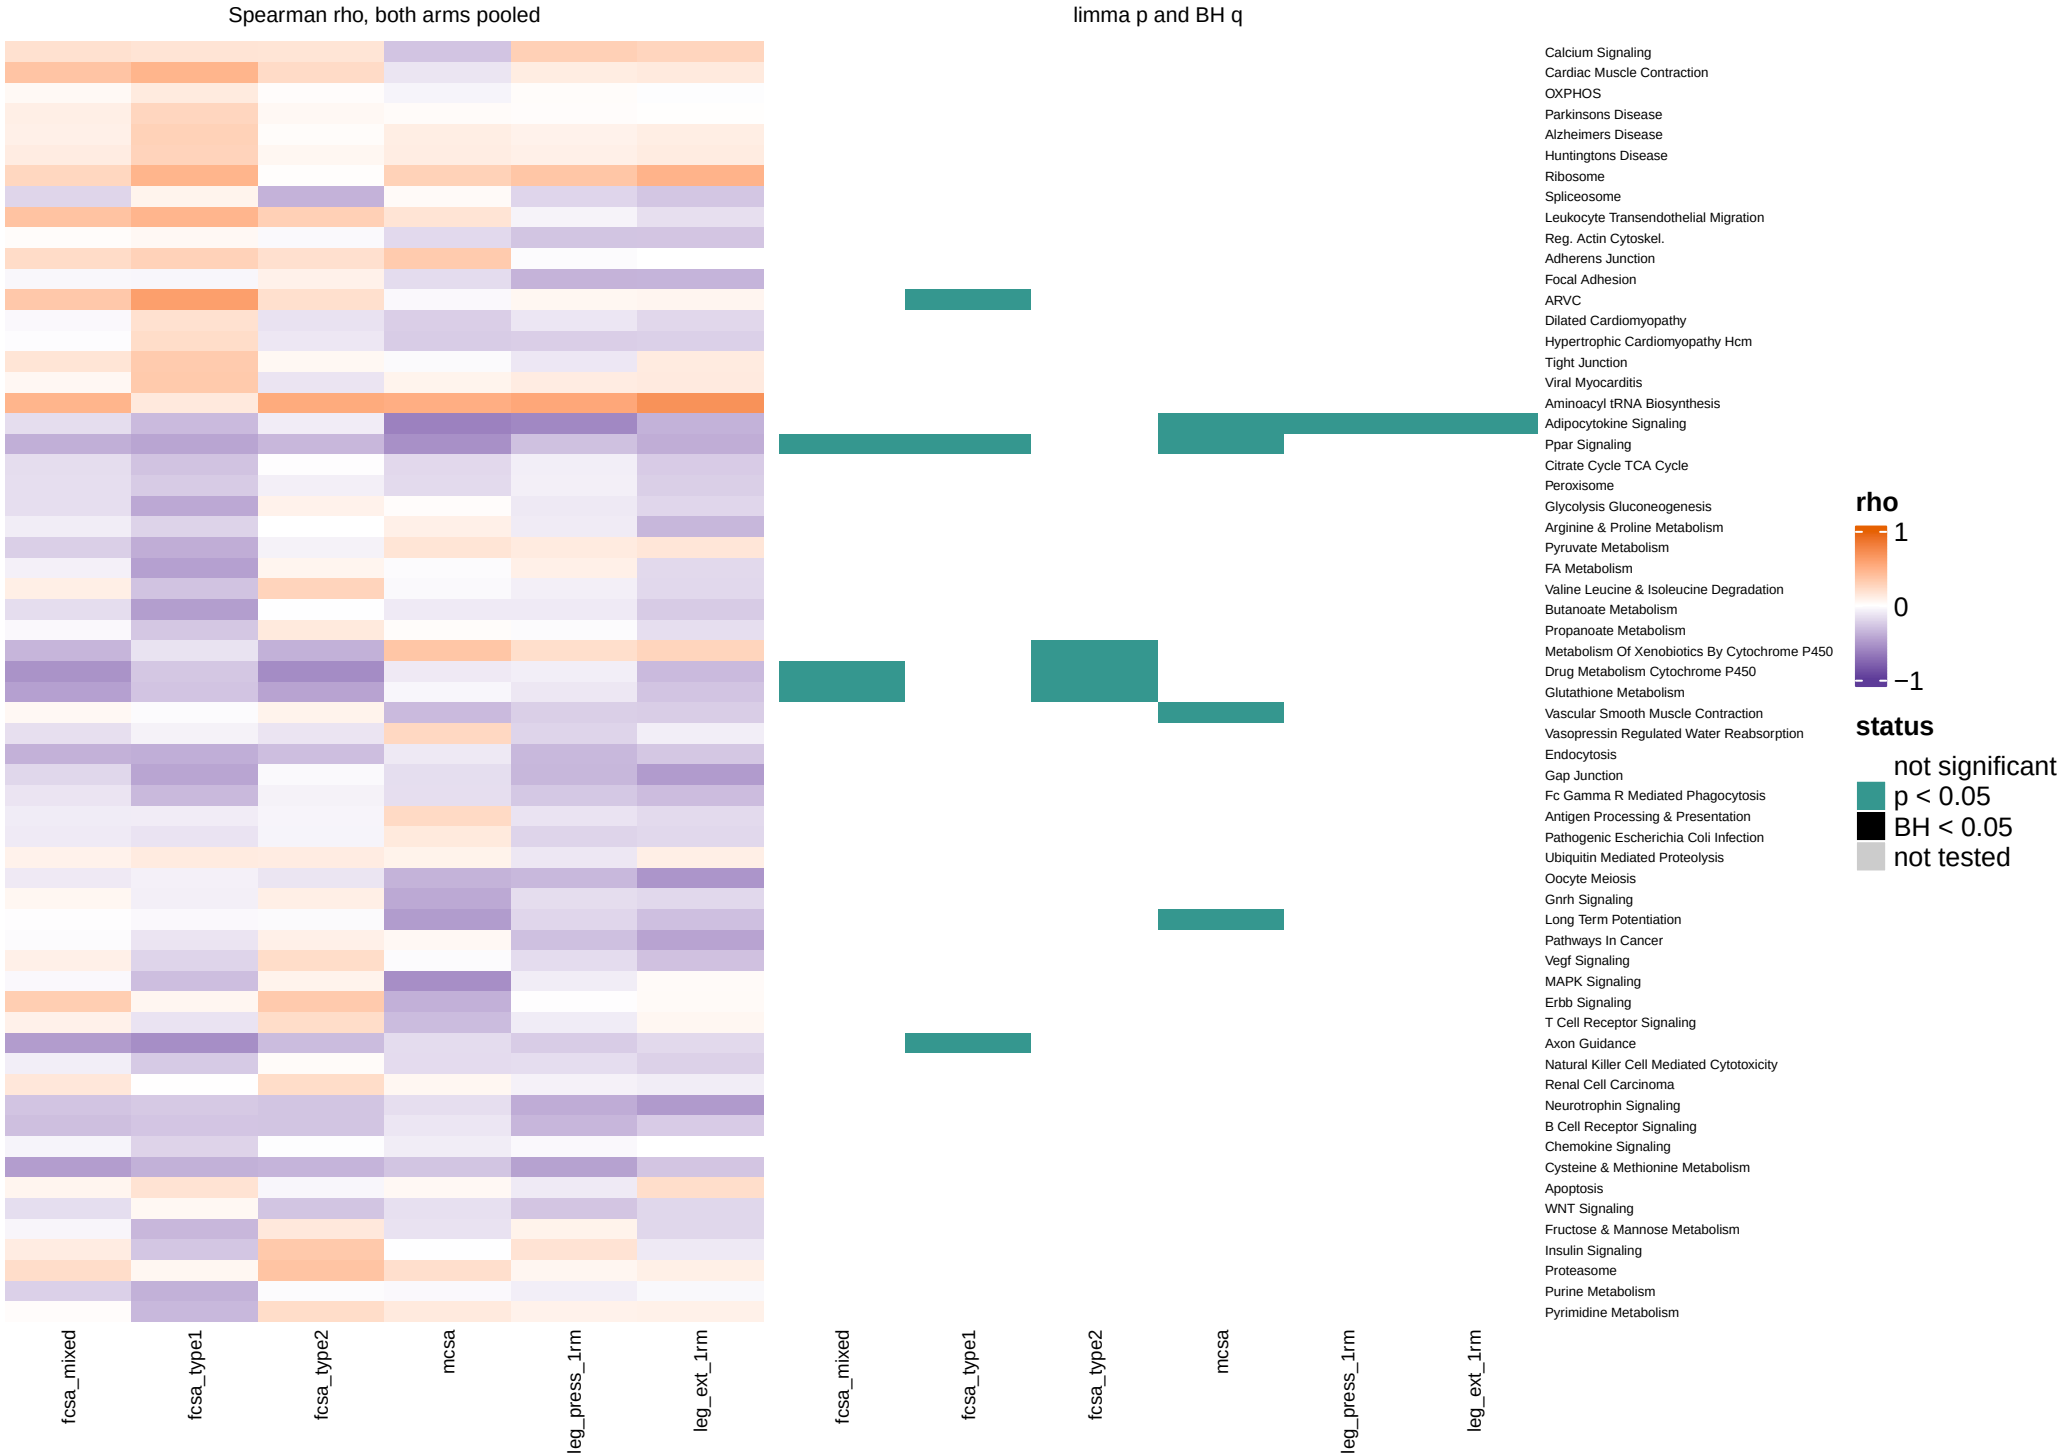


All 62 sets, one row each. Spearman rho between the singscore (T3 level) and each outcome; status from limma. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/02_sets.xlsx, change_score.

Sample model overview: GOBP

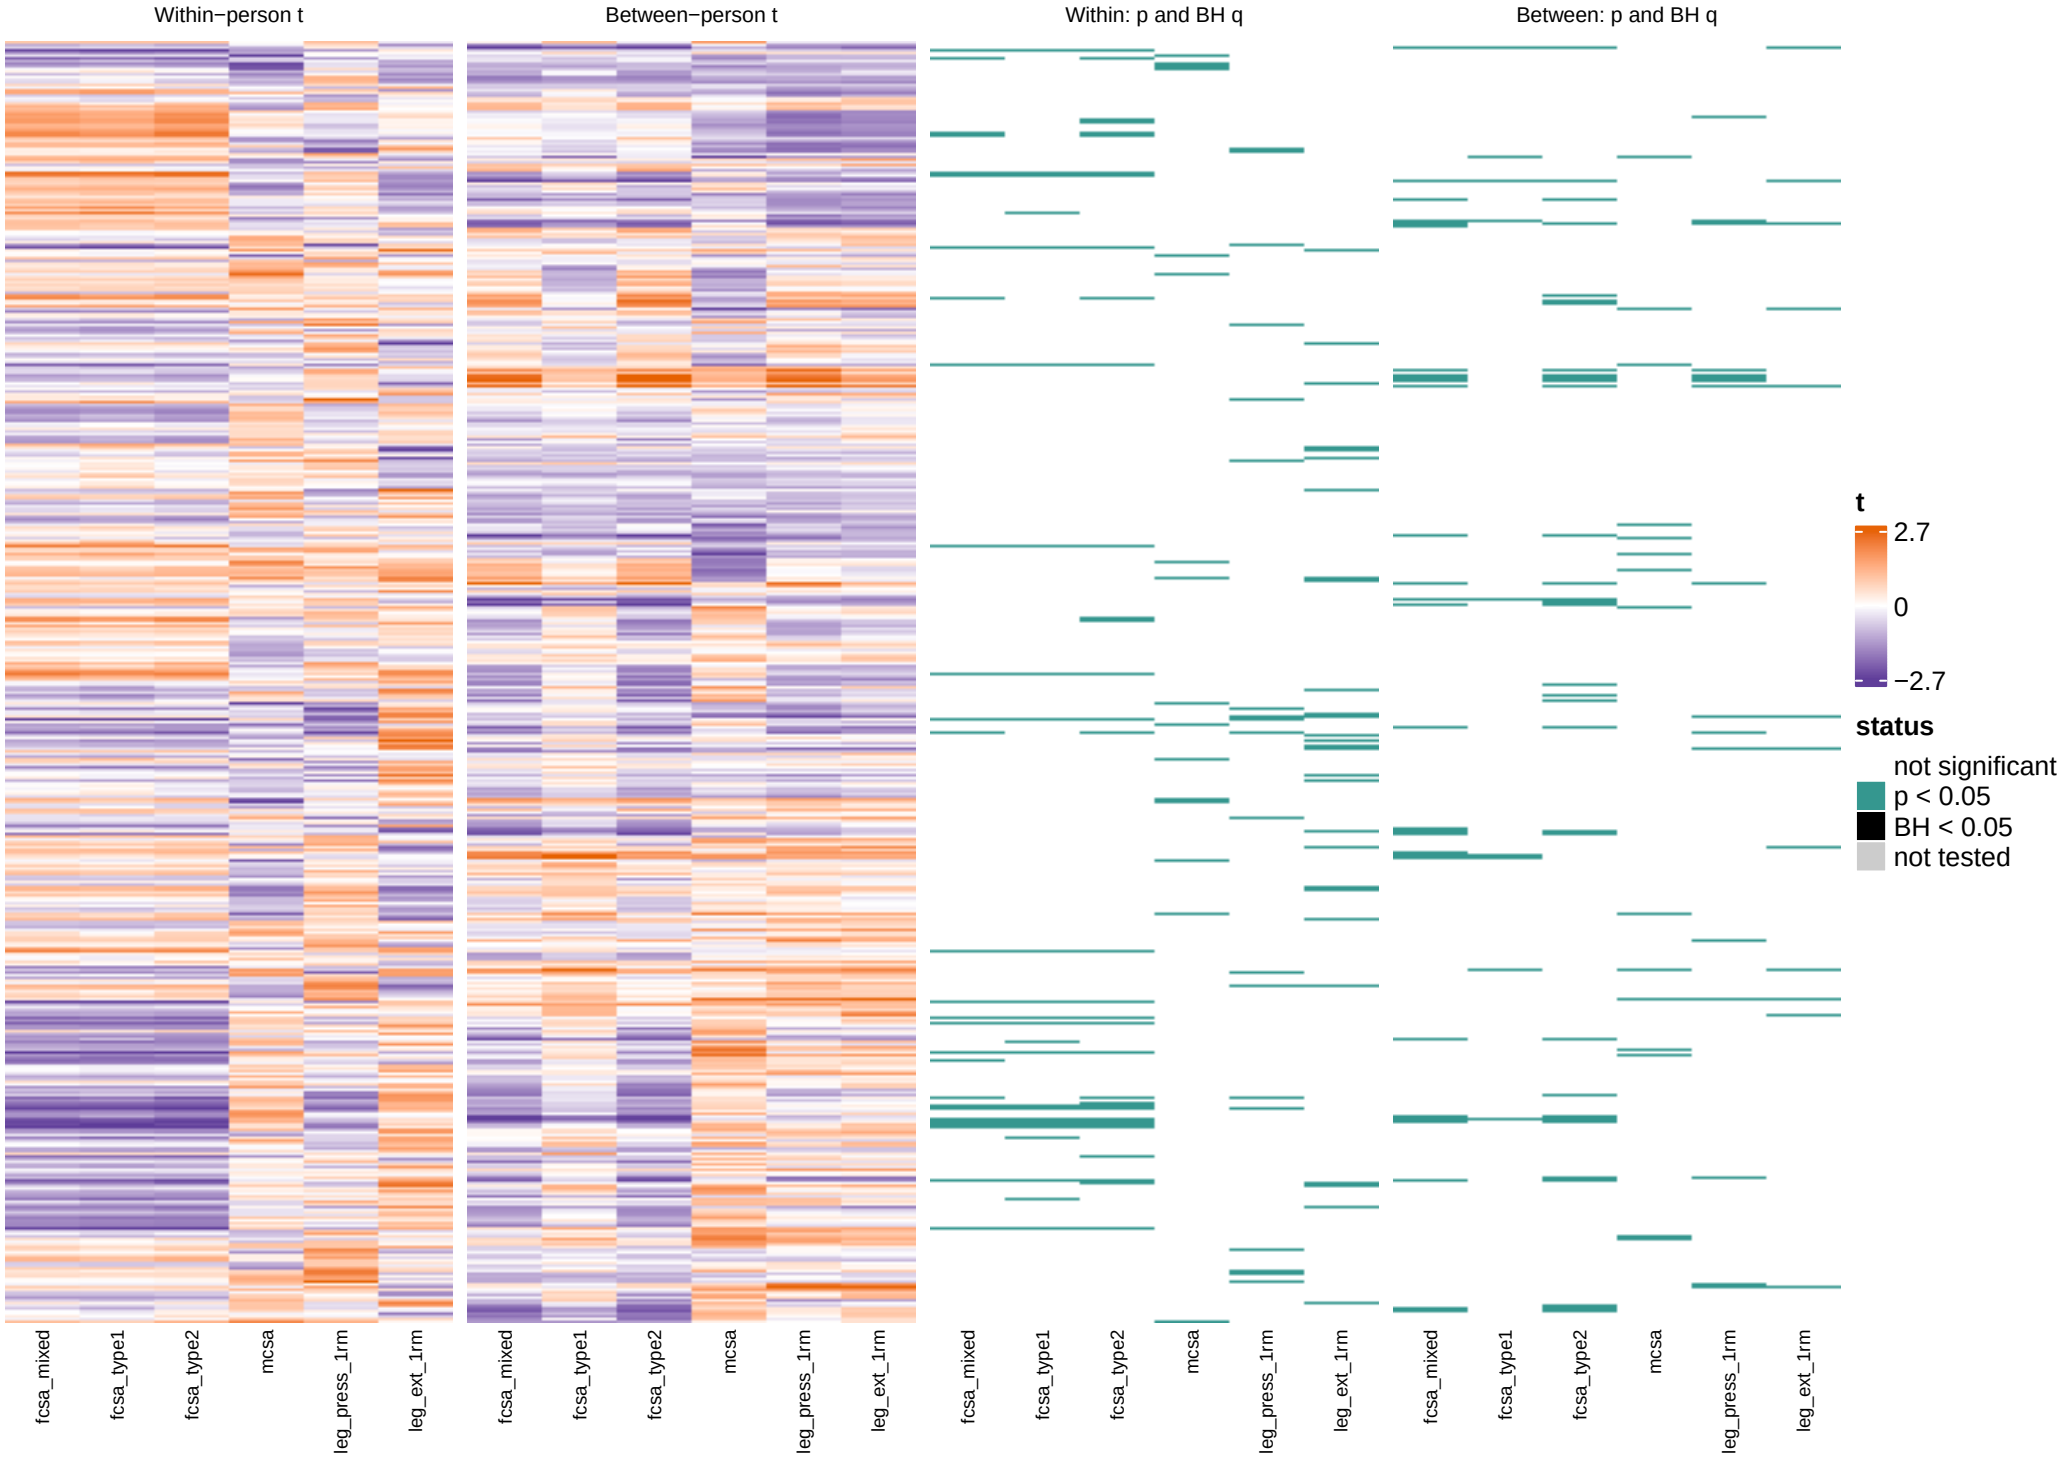


All 897 sets, one row each. Moderated t of the within and between terms, abundance ~ timepoint + between + within, subject blocked. Colours stop at the 99th percentile of |t|, 2.7. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/02_sets.xlsx, model.

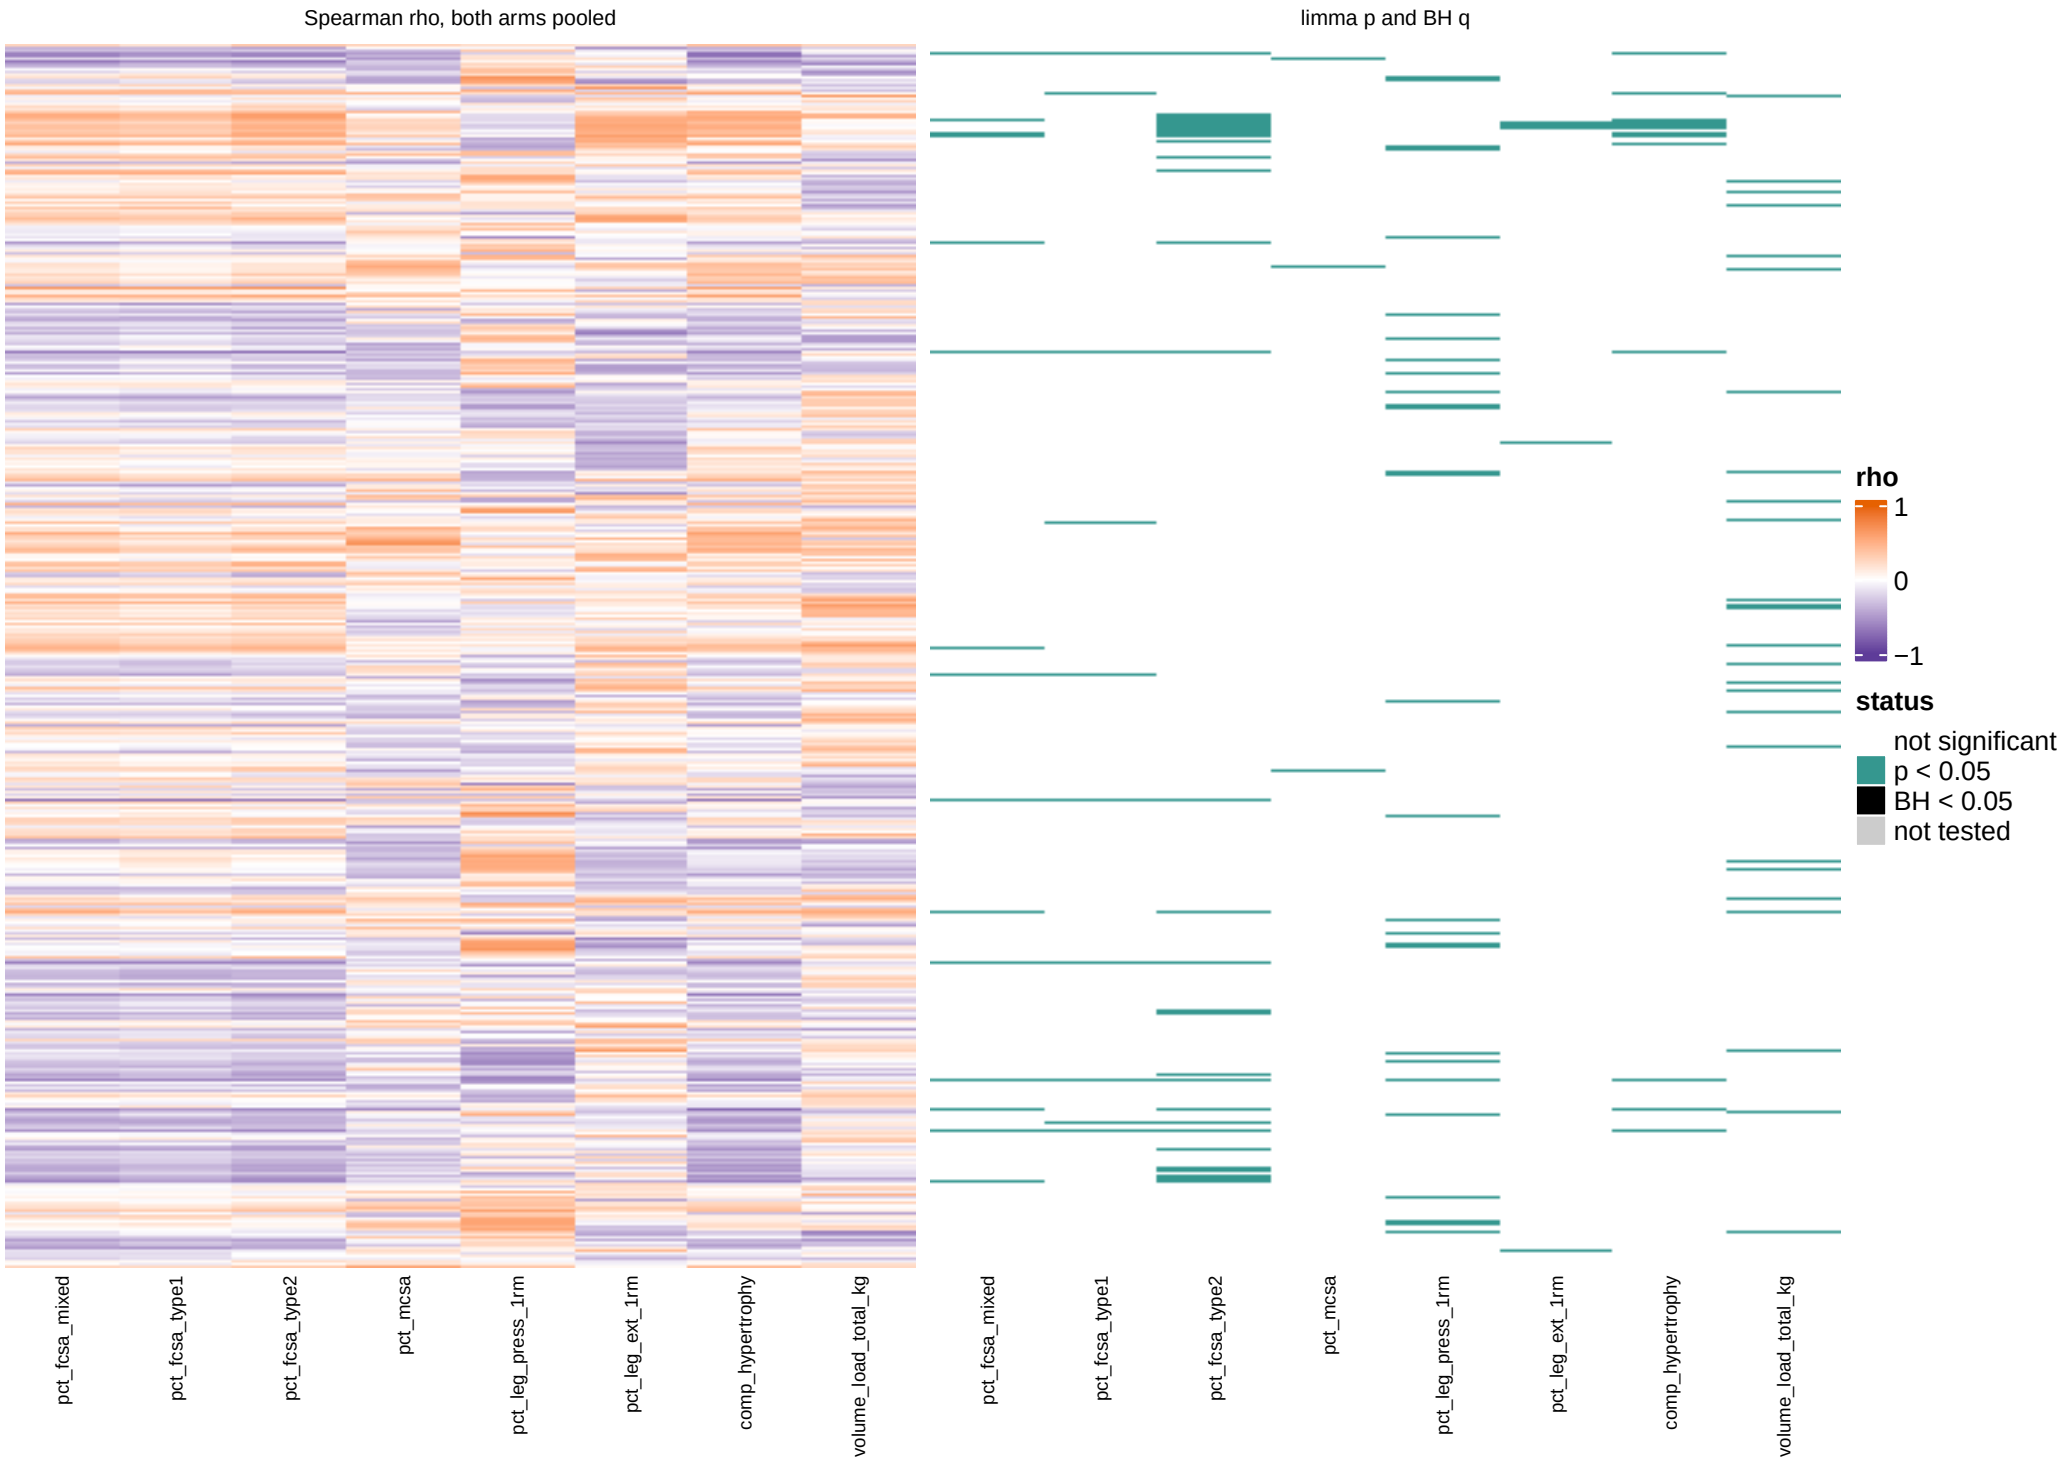


All 897 sets, one row each. Spearman rho between the singscore (change, T1 to T2) and each outcome; status from limma. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/02_sets.xlsx, change_score.

Change score overview, baseline window: GOBP

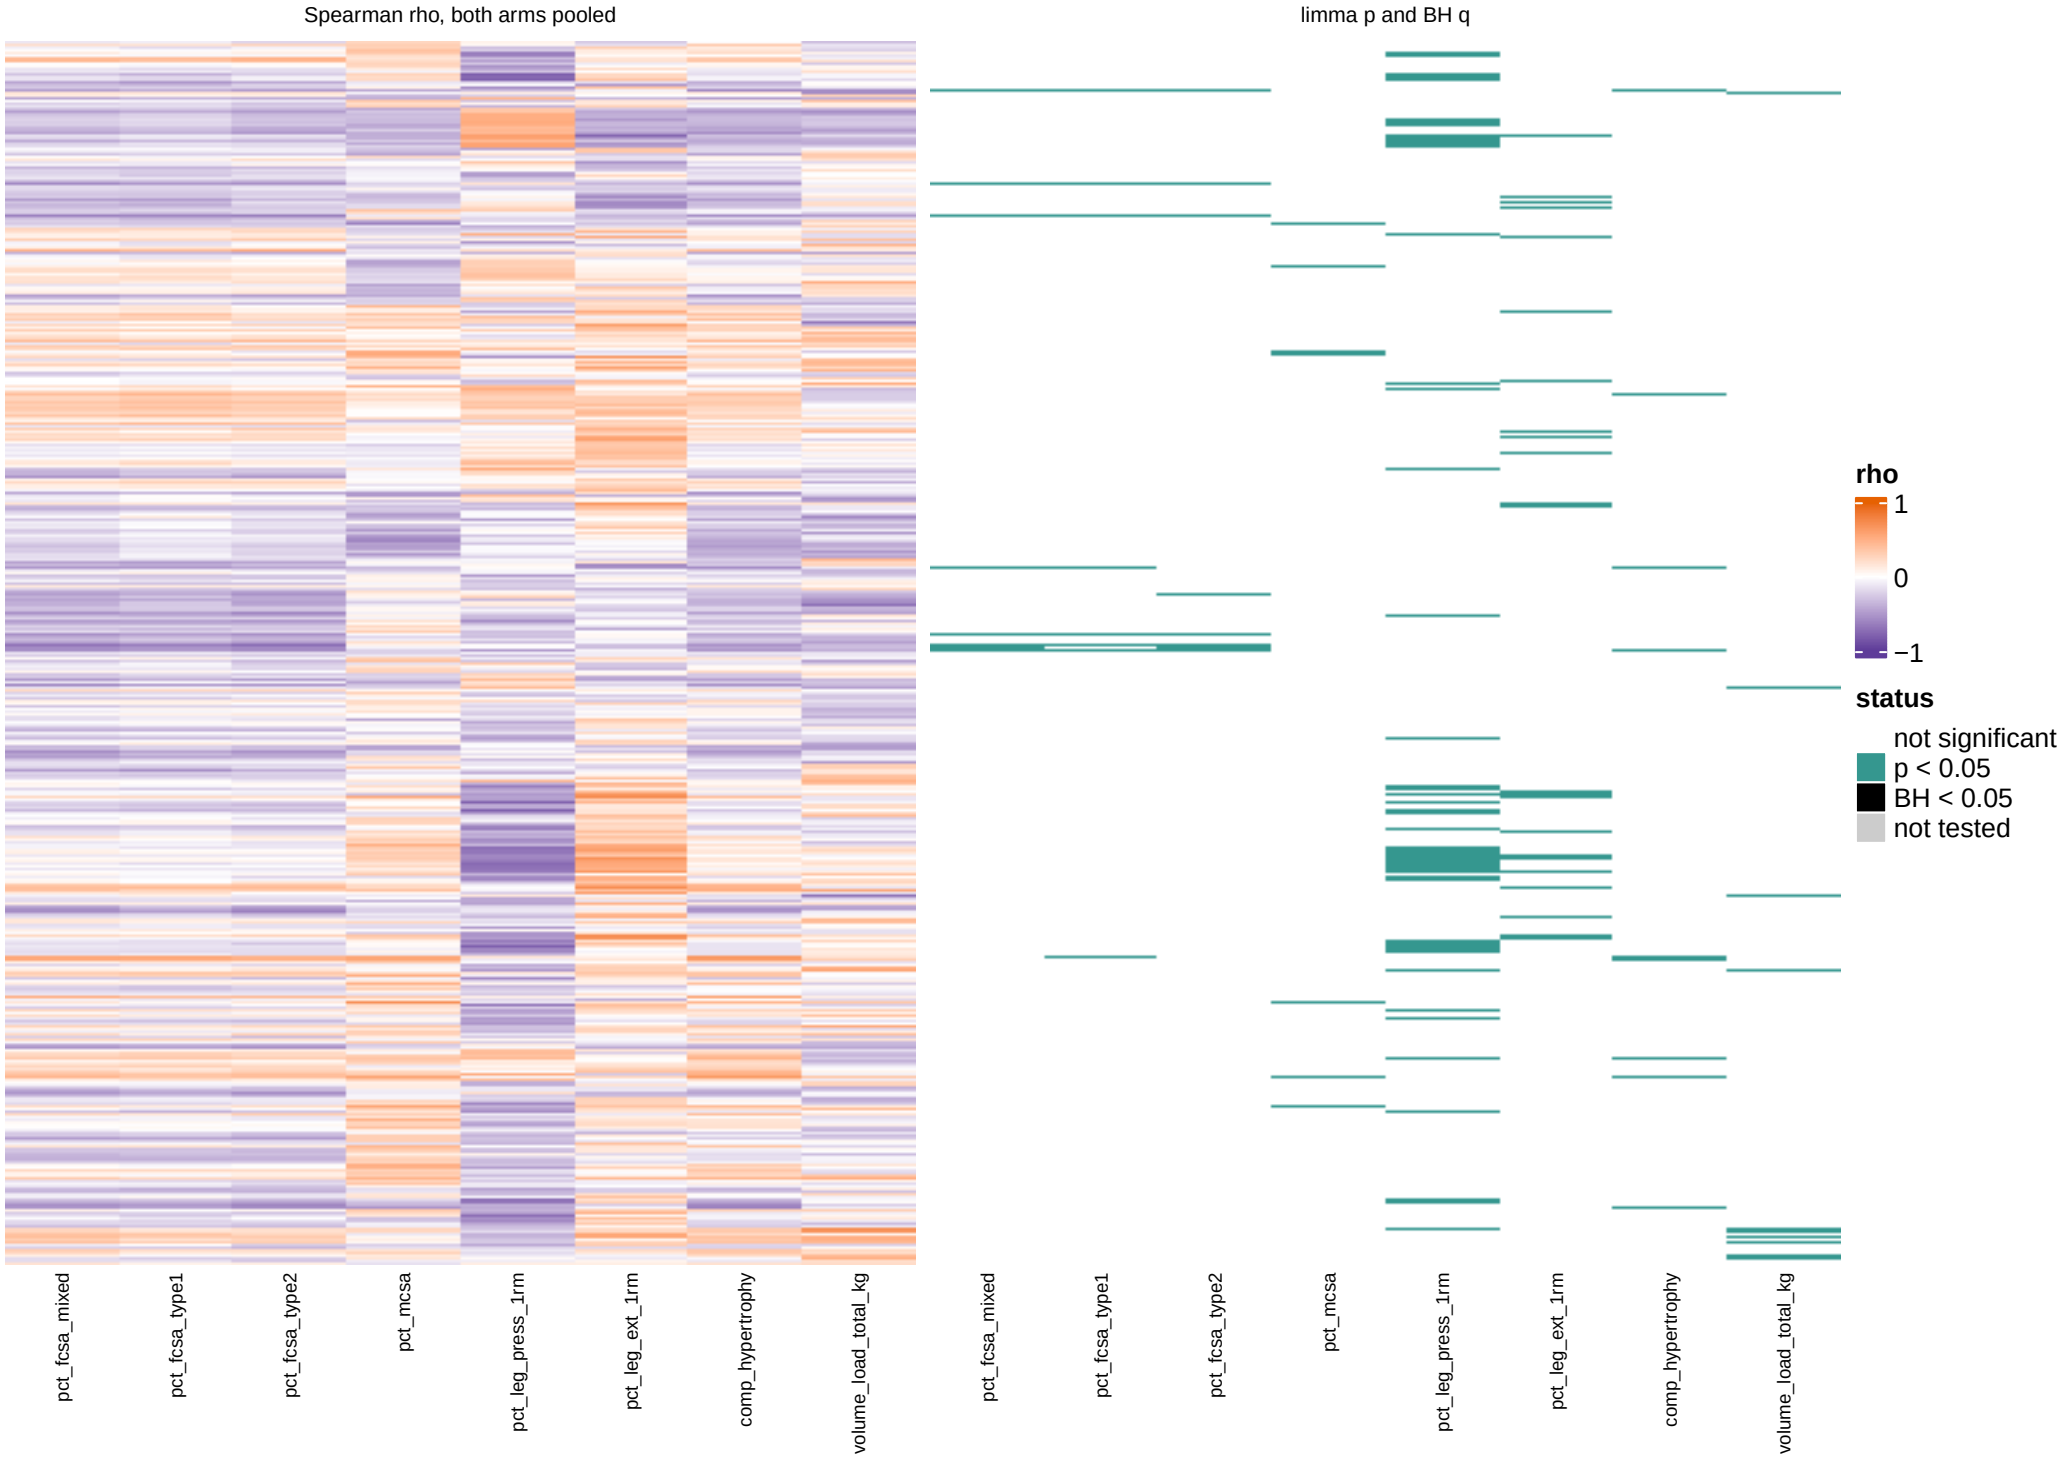


All 897 sets, one row each. Spearman rho between the singscore (T1 level) and each outcome; status from limma. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/02_sets.xlsx, change_score.

Change score overview, acute window: GOBP

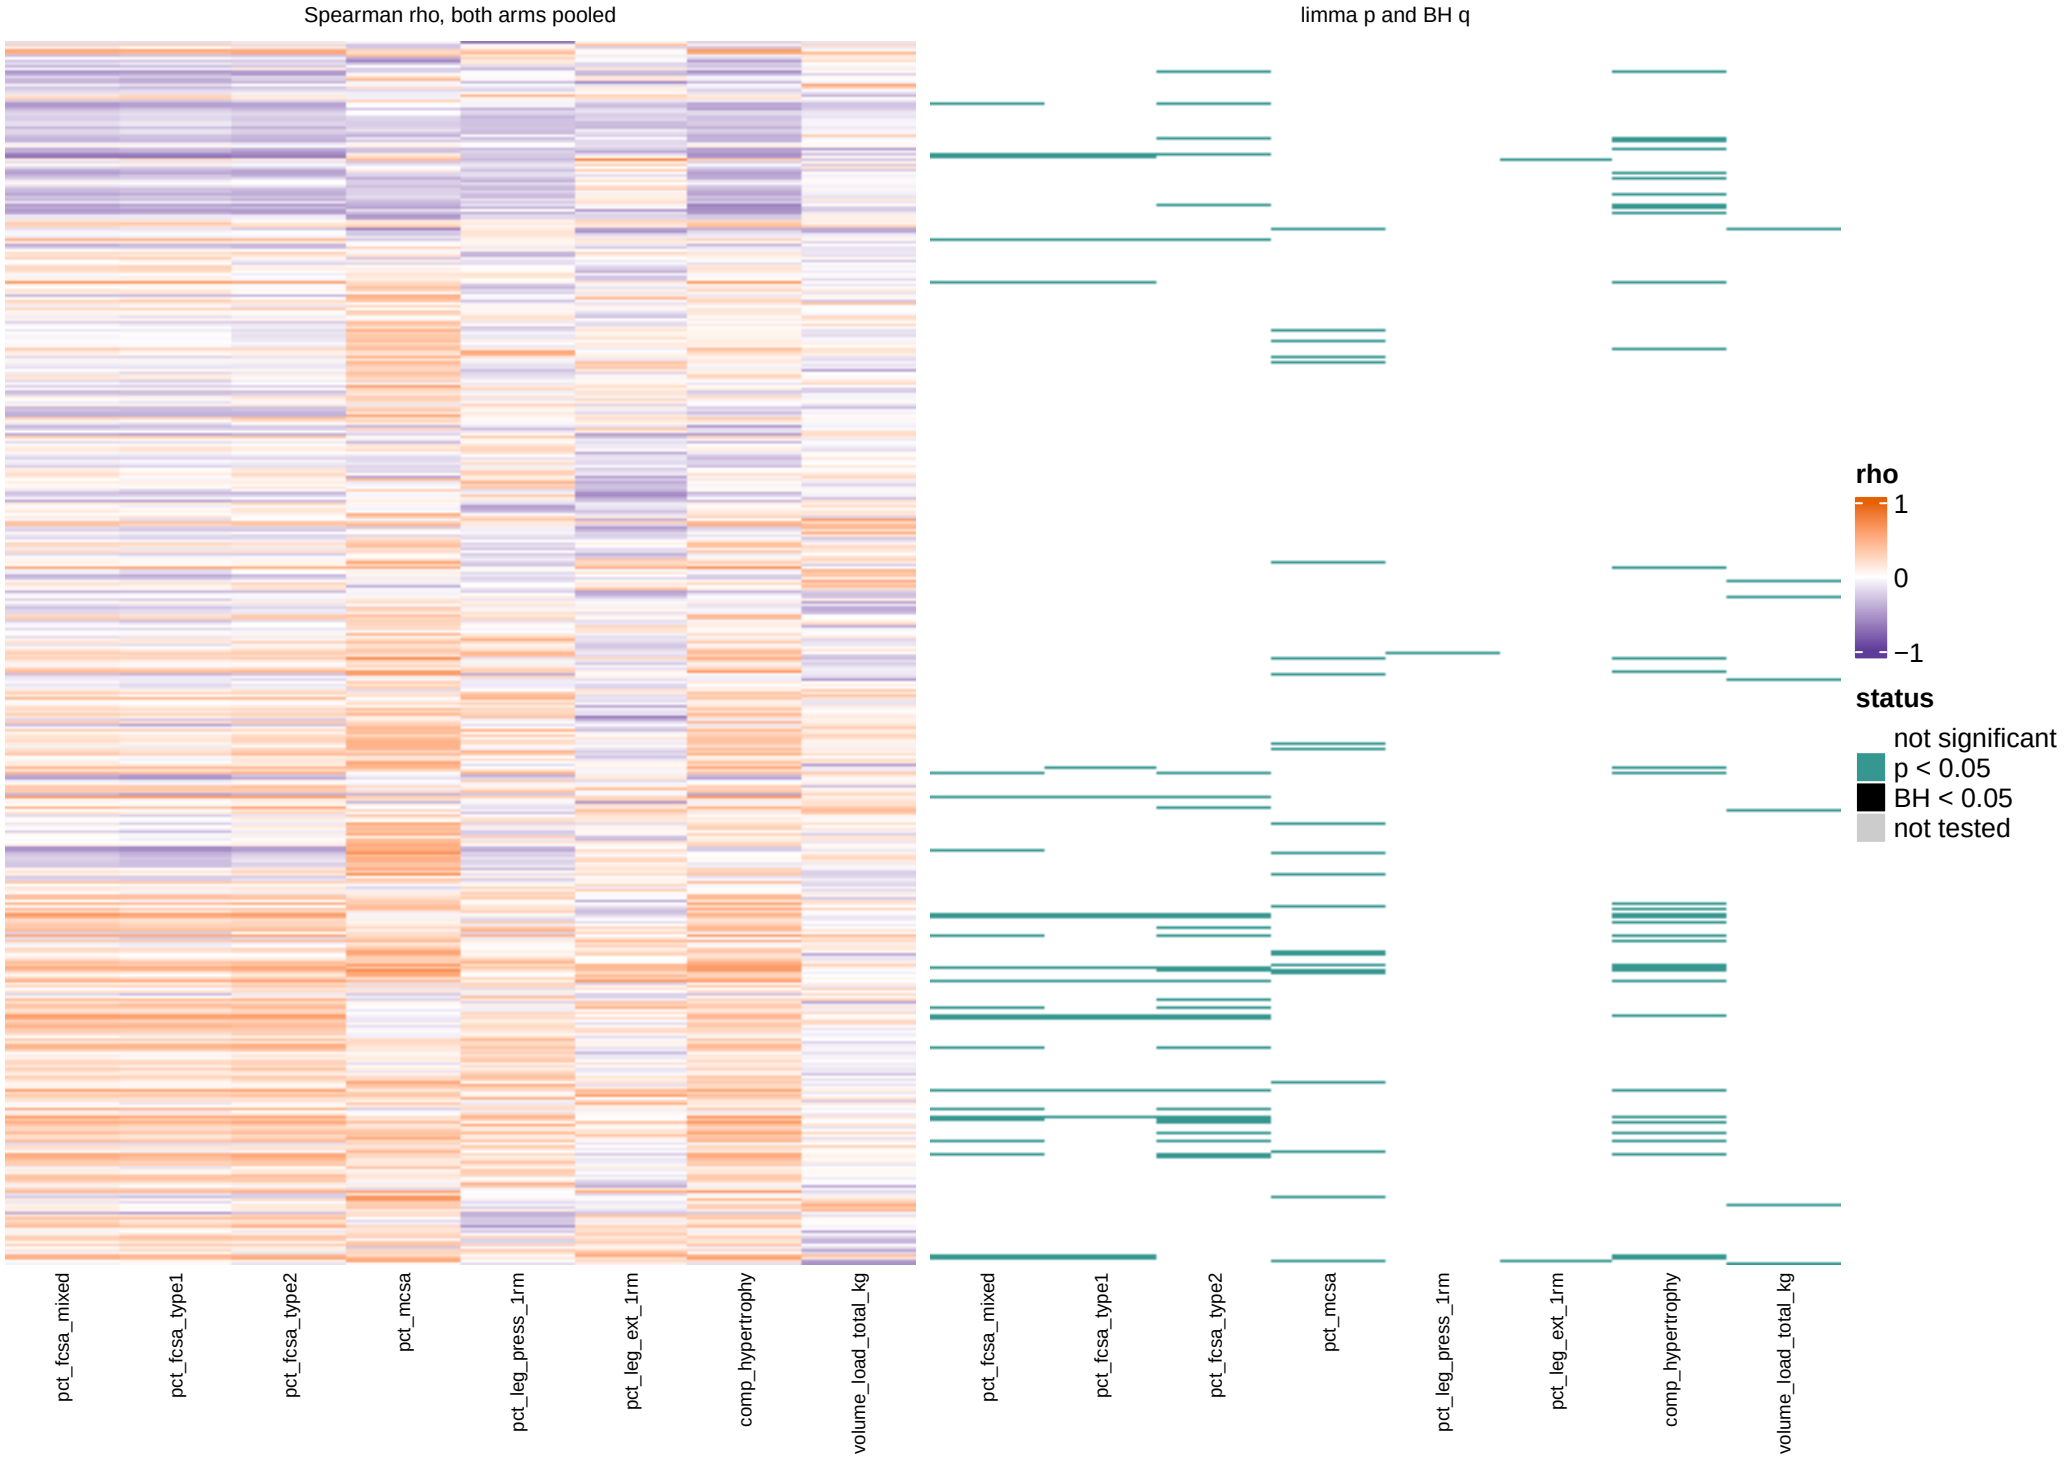


All 897 sets, one row each. Spearman rho between the singscore (change, T2 to T3) and each outcome; status from limma. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/02_sets.xlsx, change_score.

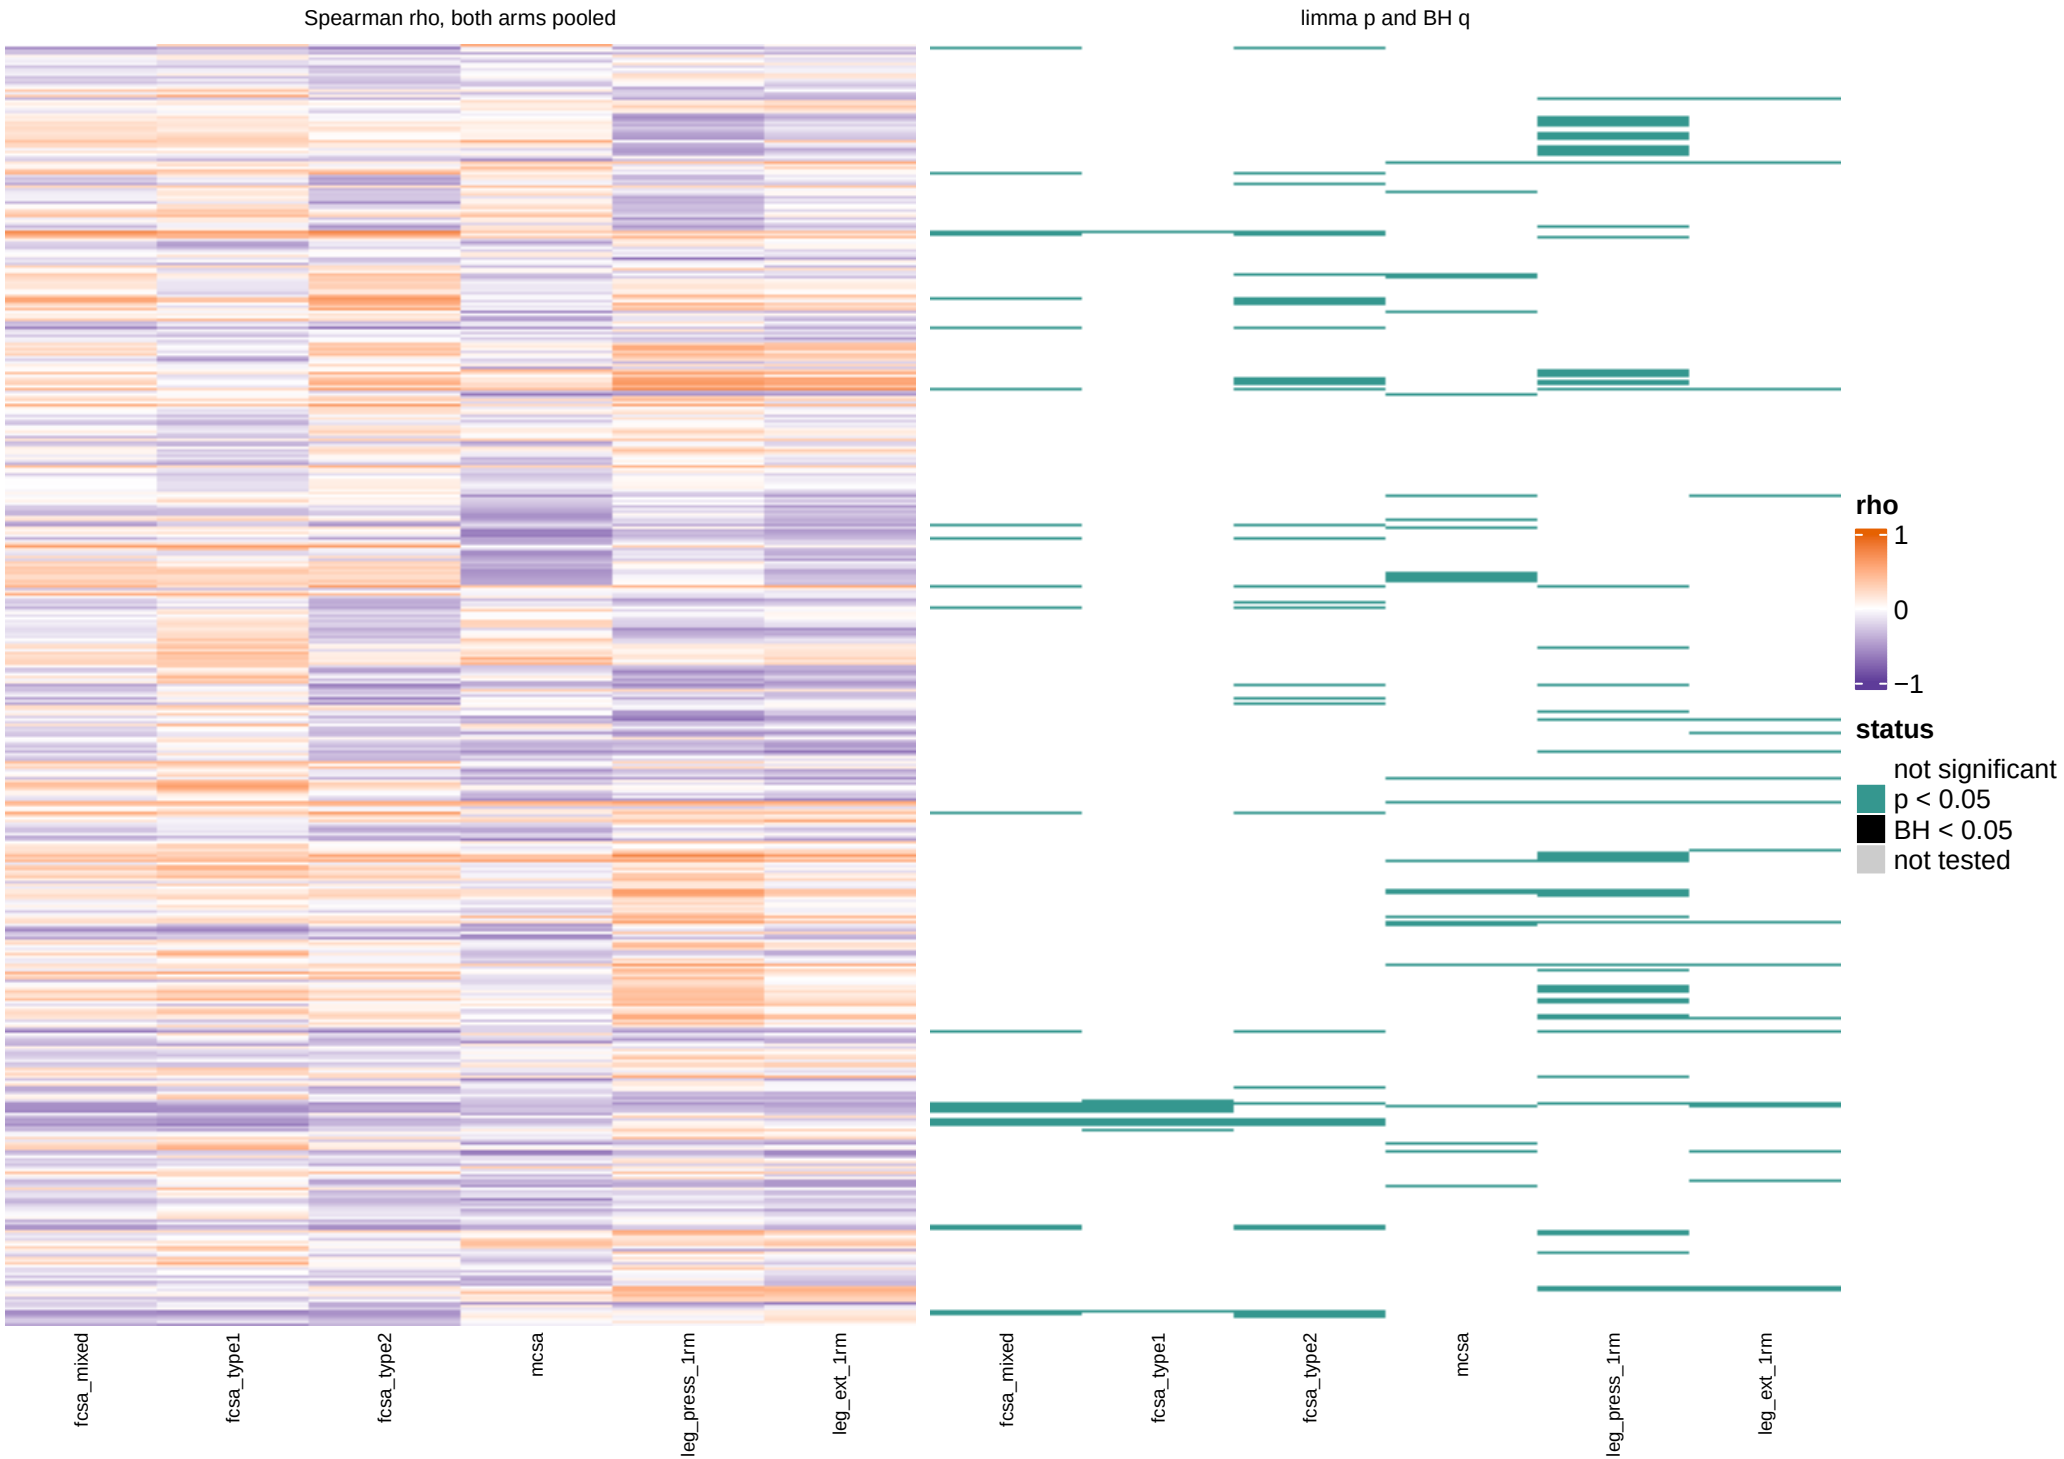


All 897 sets, one row each. Spearman rho between the singscore (T1 level) and each outcome; status from limma. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/02_sets.xlsx, change_score.

Change score overview, post_level window: GOBP

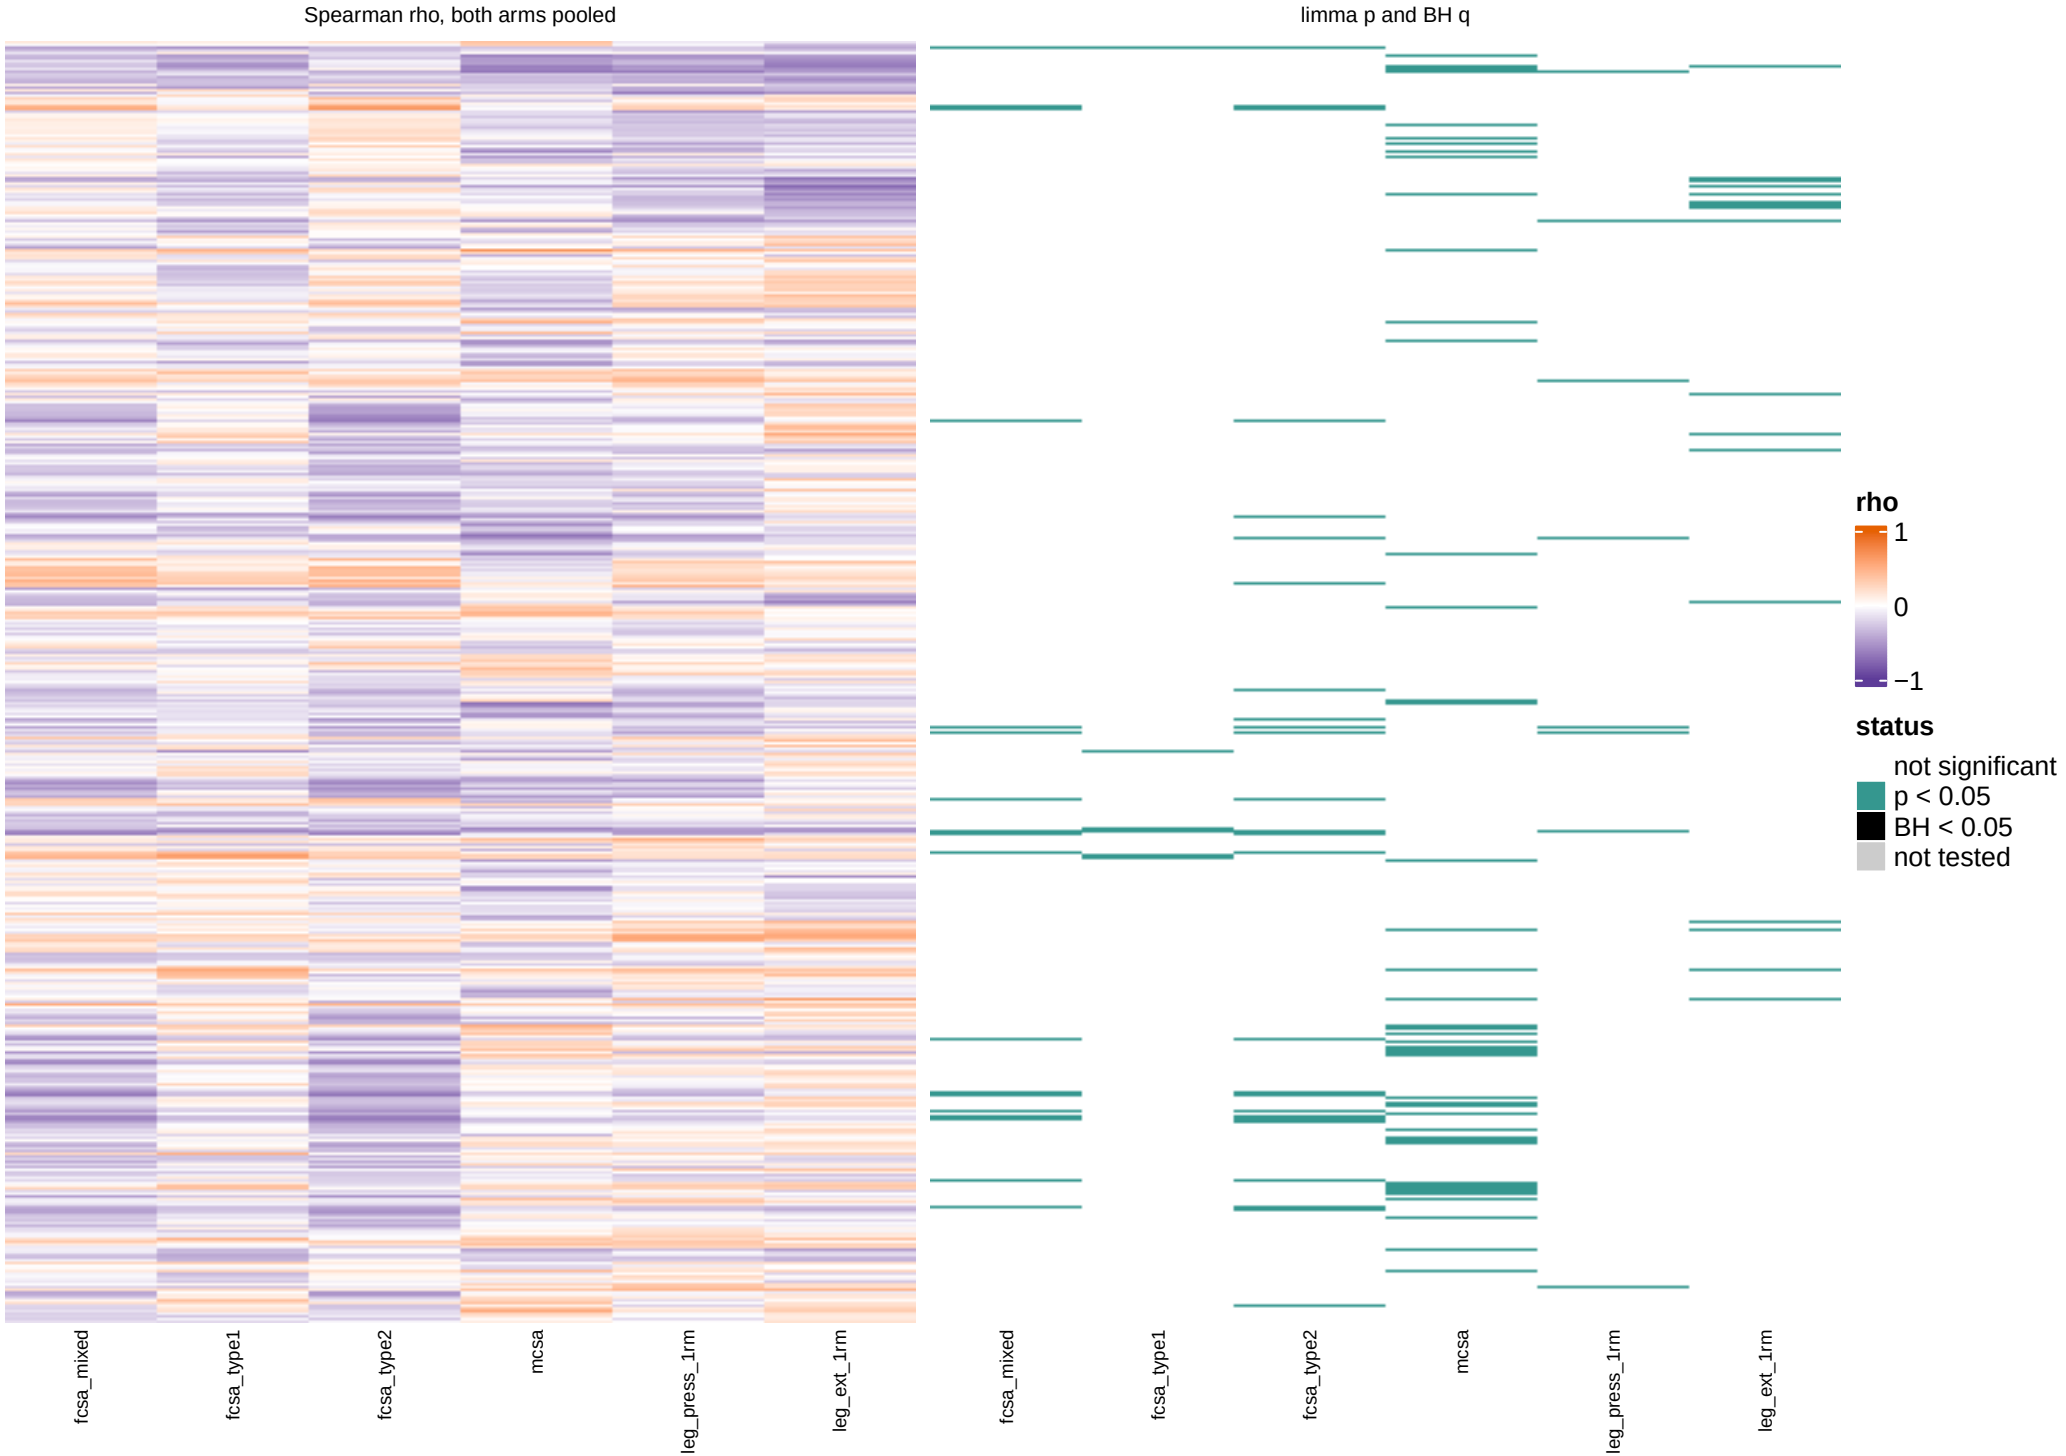


All 897 sets, one row each. Spearman rho between the singscore (T2 level) and each outcome; status from limma. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/02_sets.xlsx, change_score.

Change score overview, post_bout_level window: GOBP

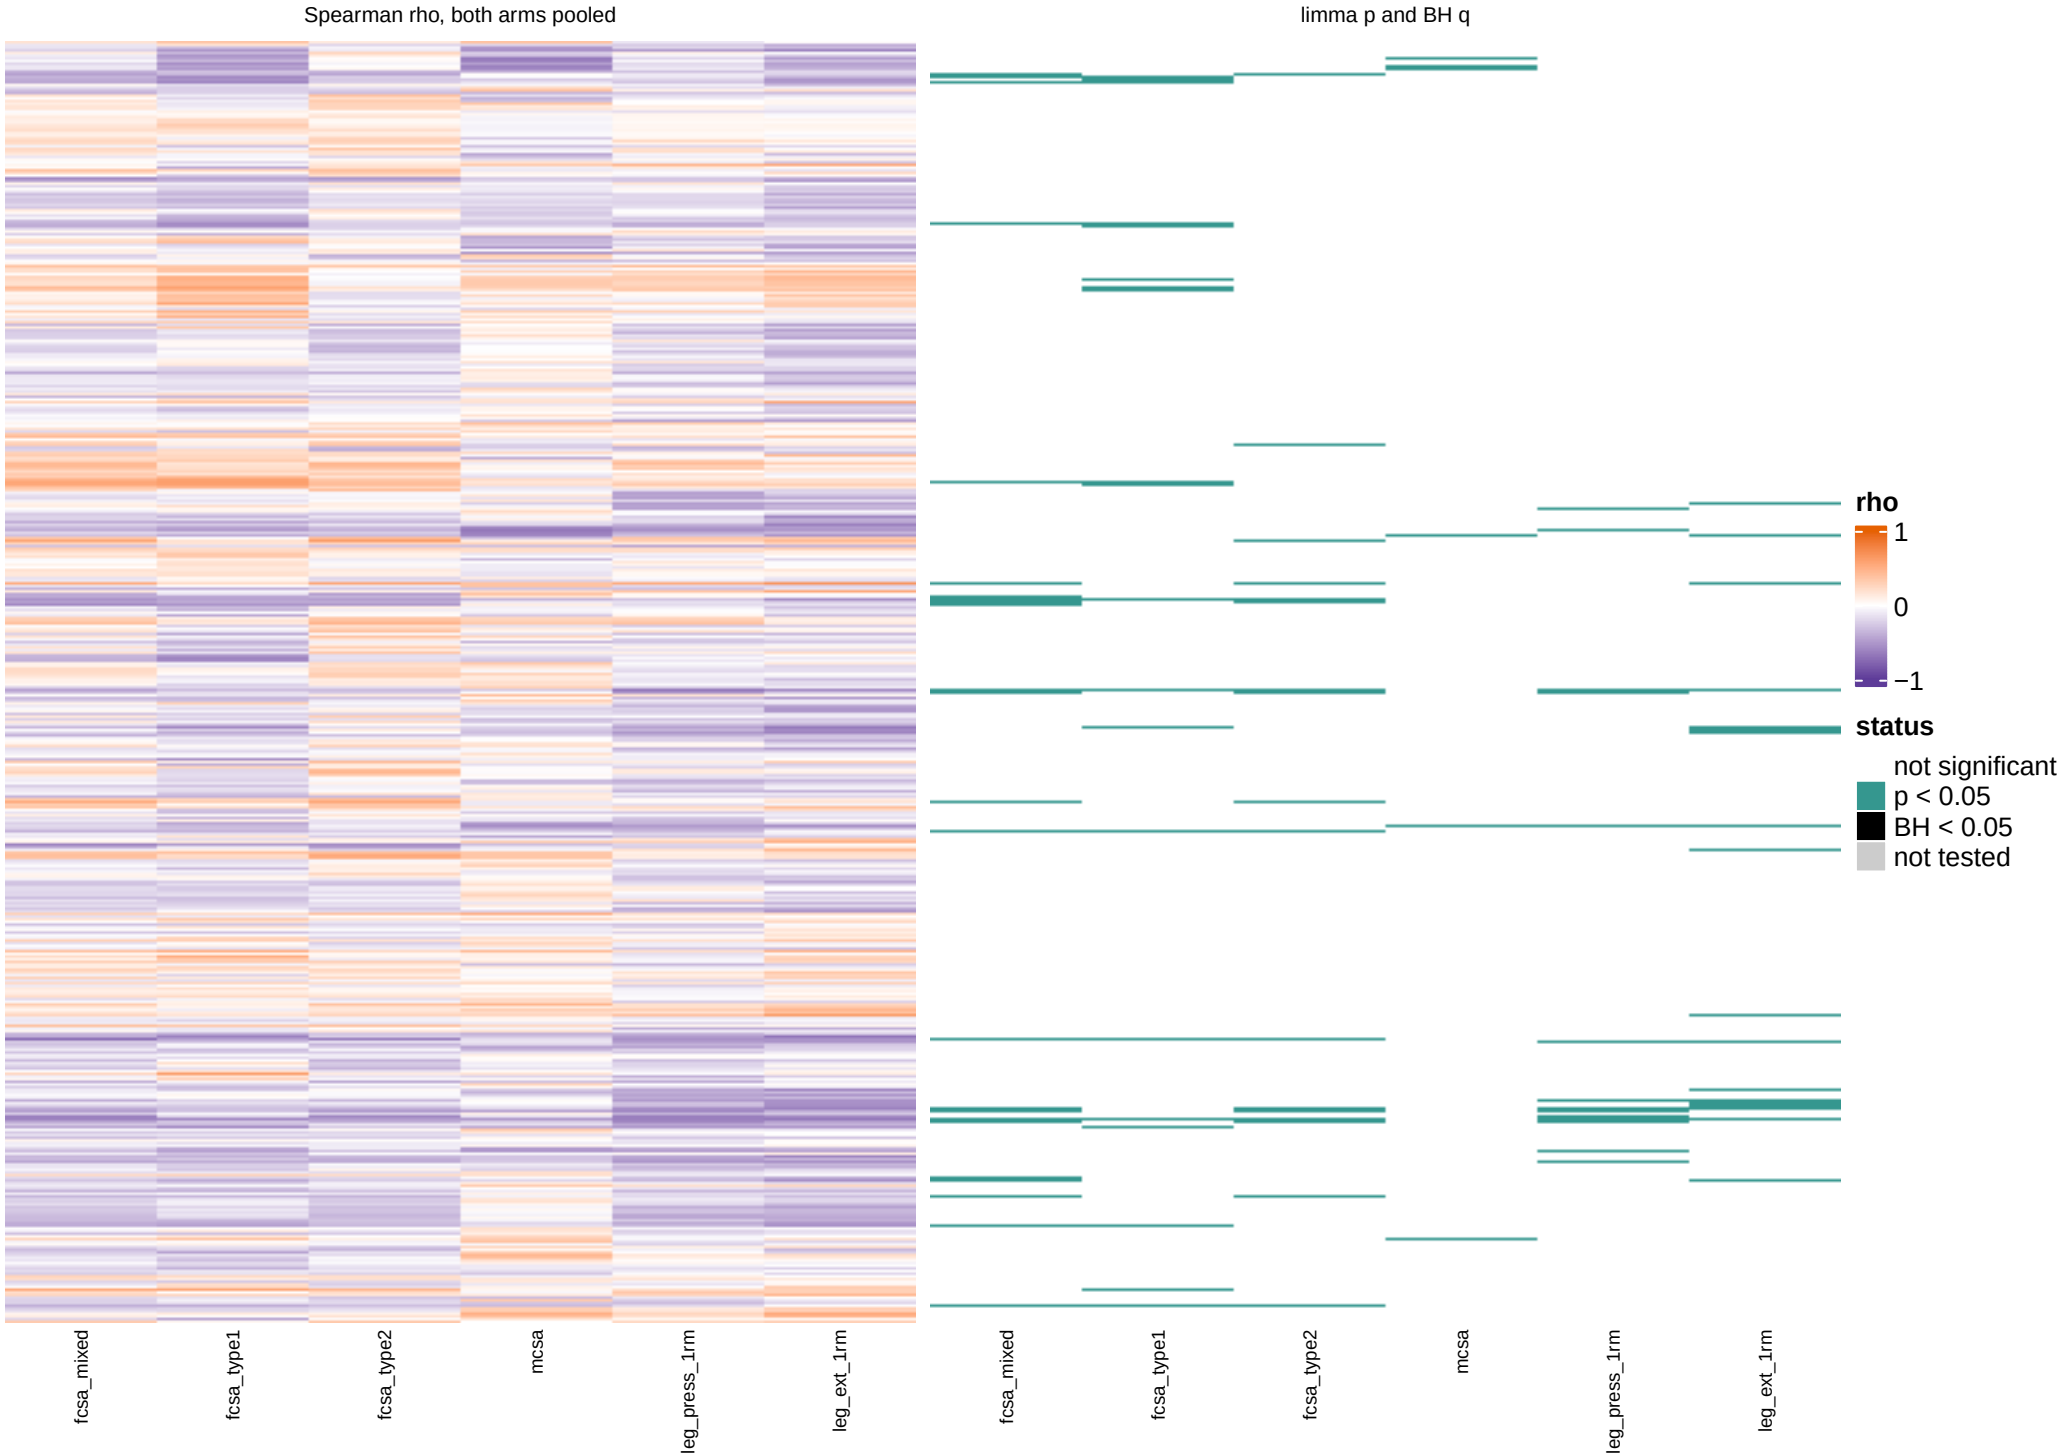

All 897 sets, one row each. Spearman rho between the singscore (T3 level) and each outcome; status from limma. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/02_sets.xlsx, change_score.

Sample model overview: GO_Slim

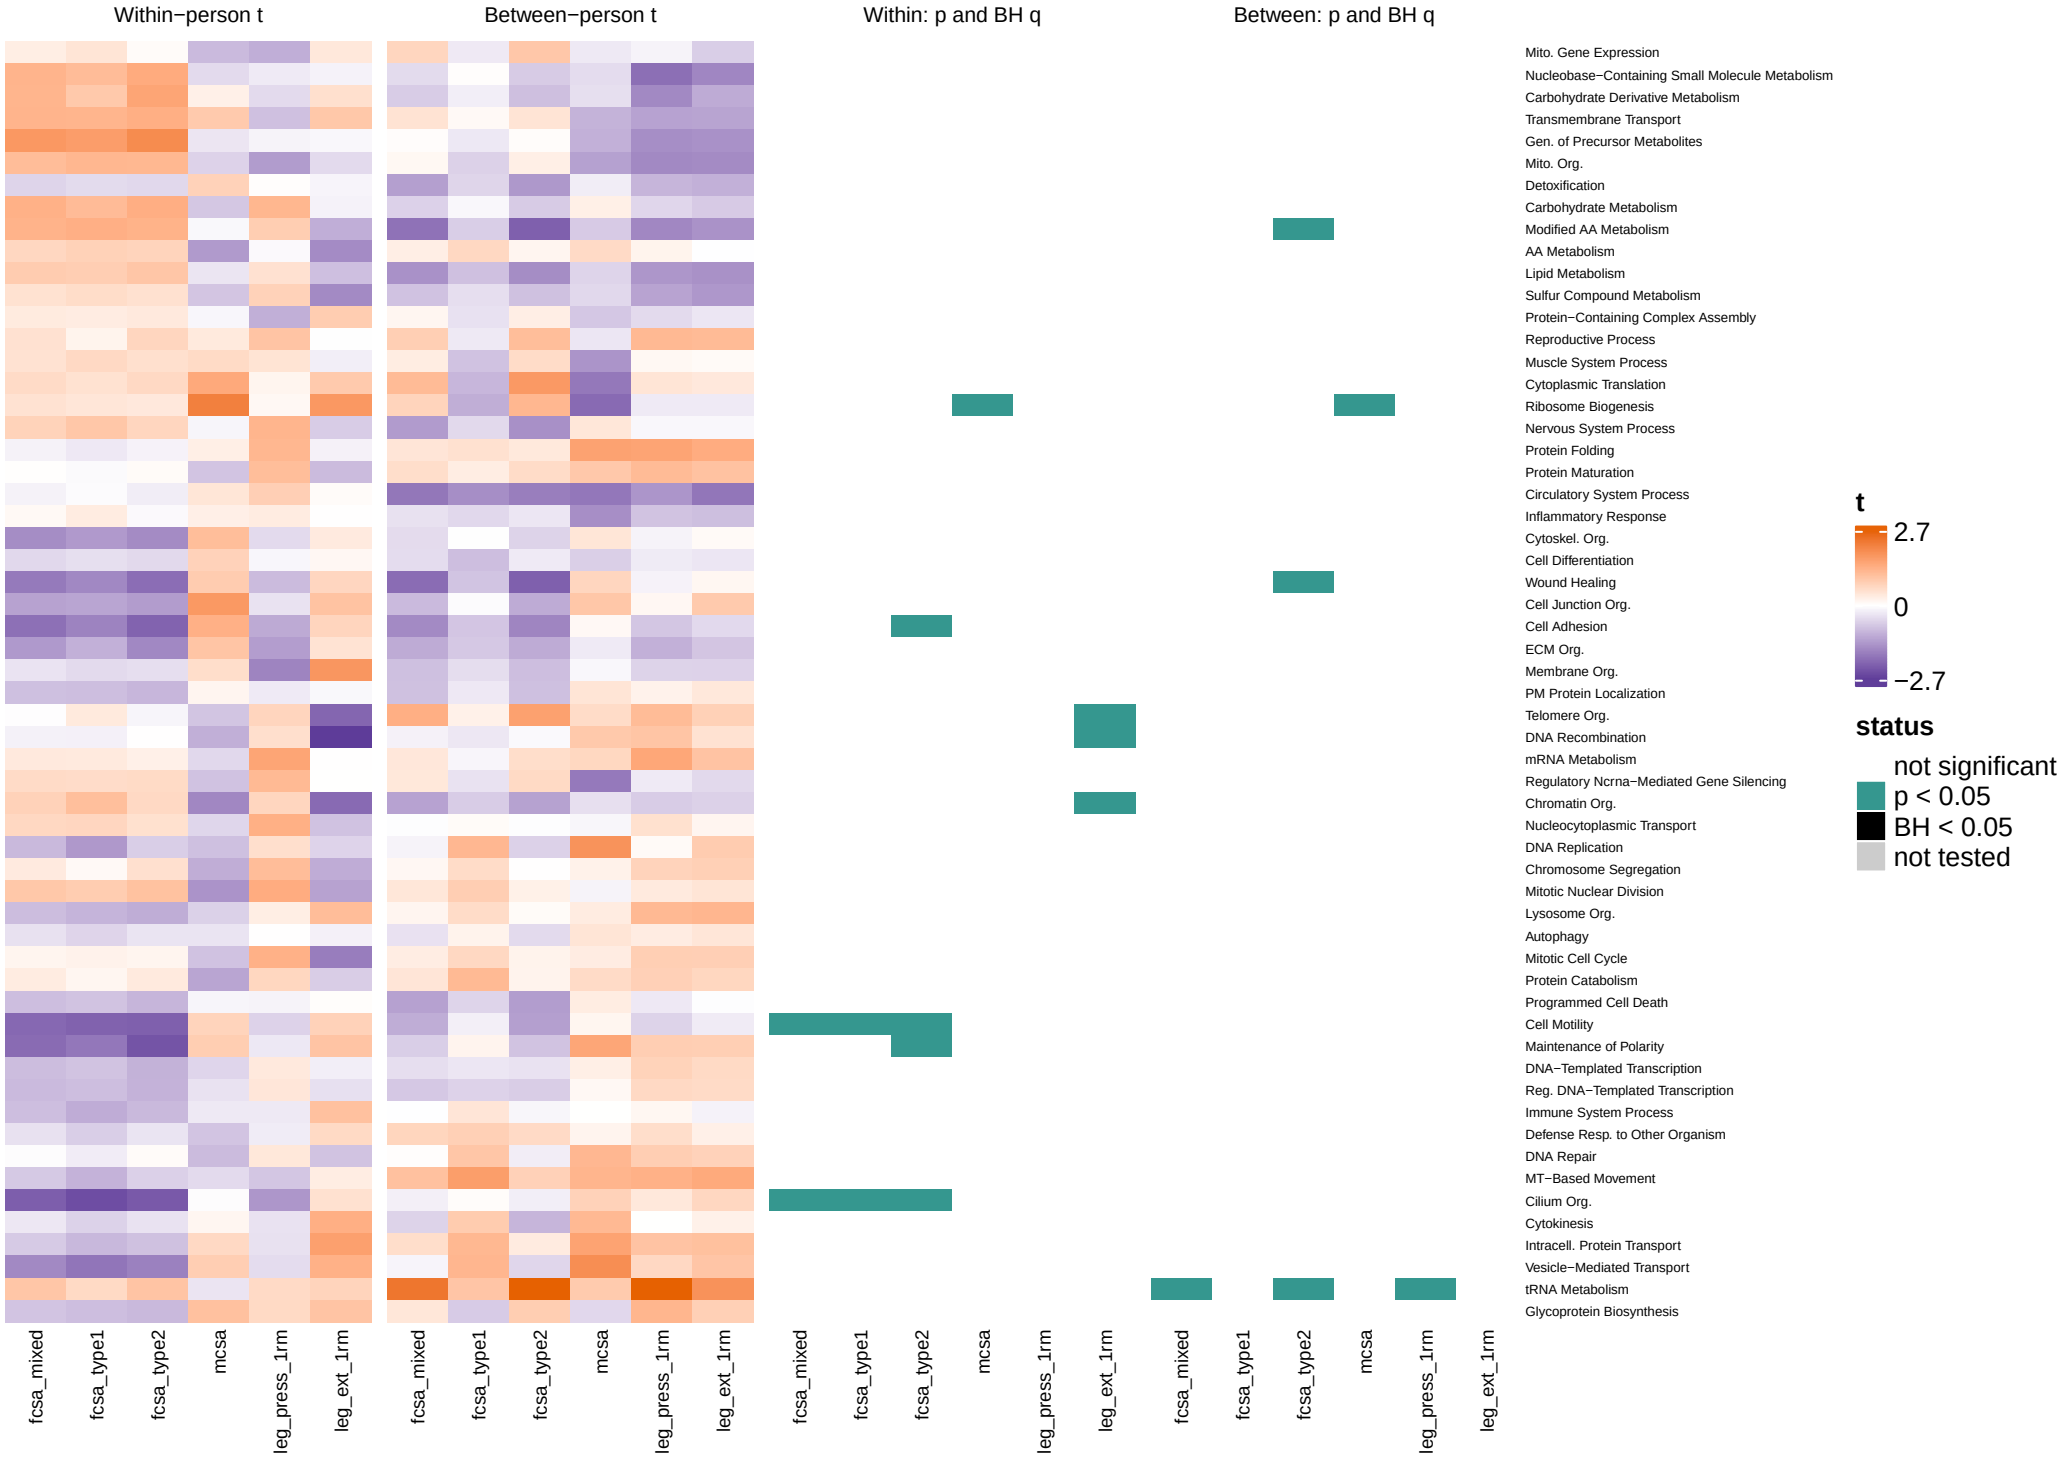

All 58 sets, one row each. Moderated t of the within and between terms, abundance ~ timepoint + between + within, subject blocked. Colours stop at the 99th percentile of |t|, 2.7. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/02_sets.xlsx, model.

Change score overview, training window: GO_Slim




All 58 sets, one row each. Spearman rho between the singscore (change, T1 to T2) and each outcome; status from limma. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/02_sets.xlsx, change_score.

Change score overview, baseline window: GO_Slim




All 58 sets, one row each. Spearman rho between the singscore (T1 level) and each outcome; status from limma. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/02_sets.xlsx, change_score.

Change score overview, acute window: GO_Slim

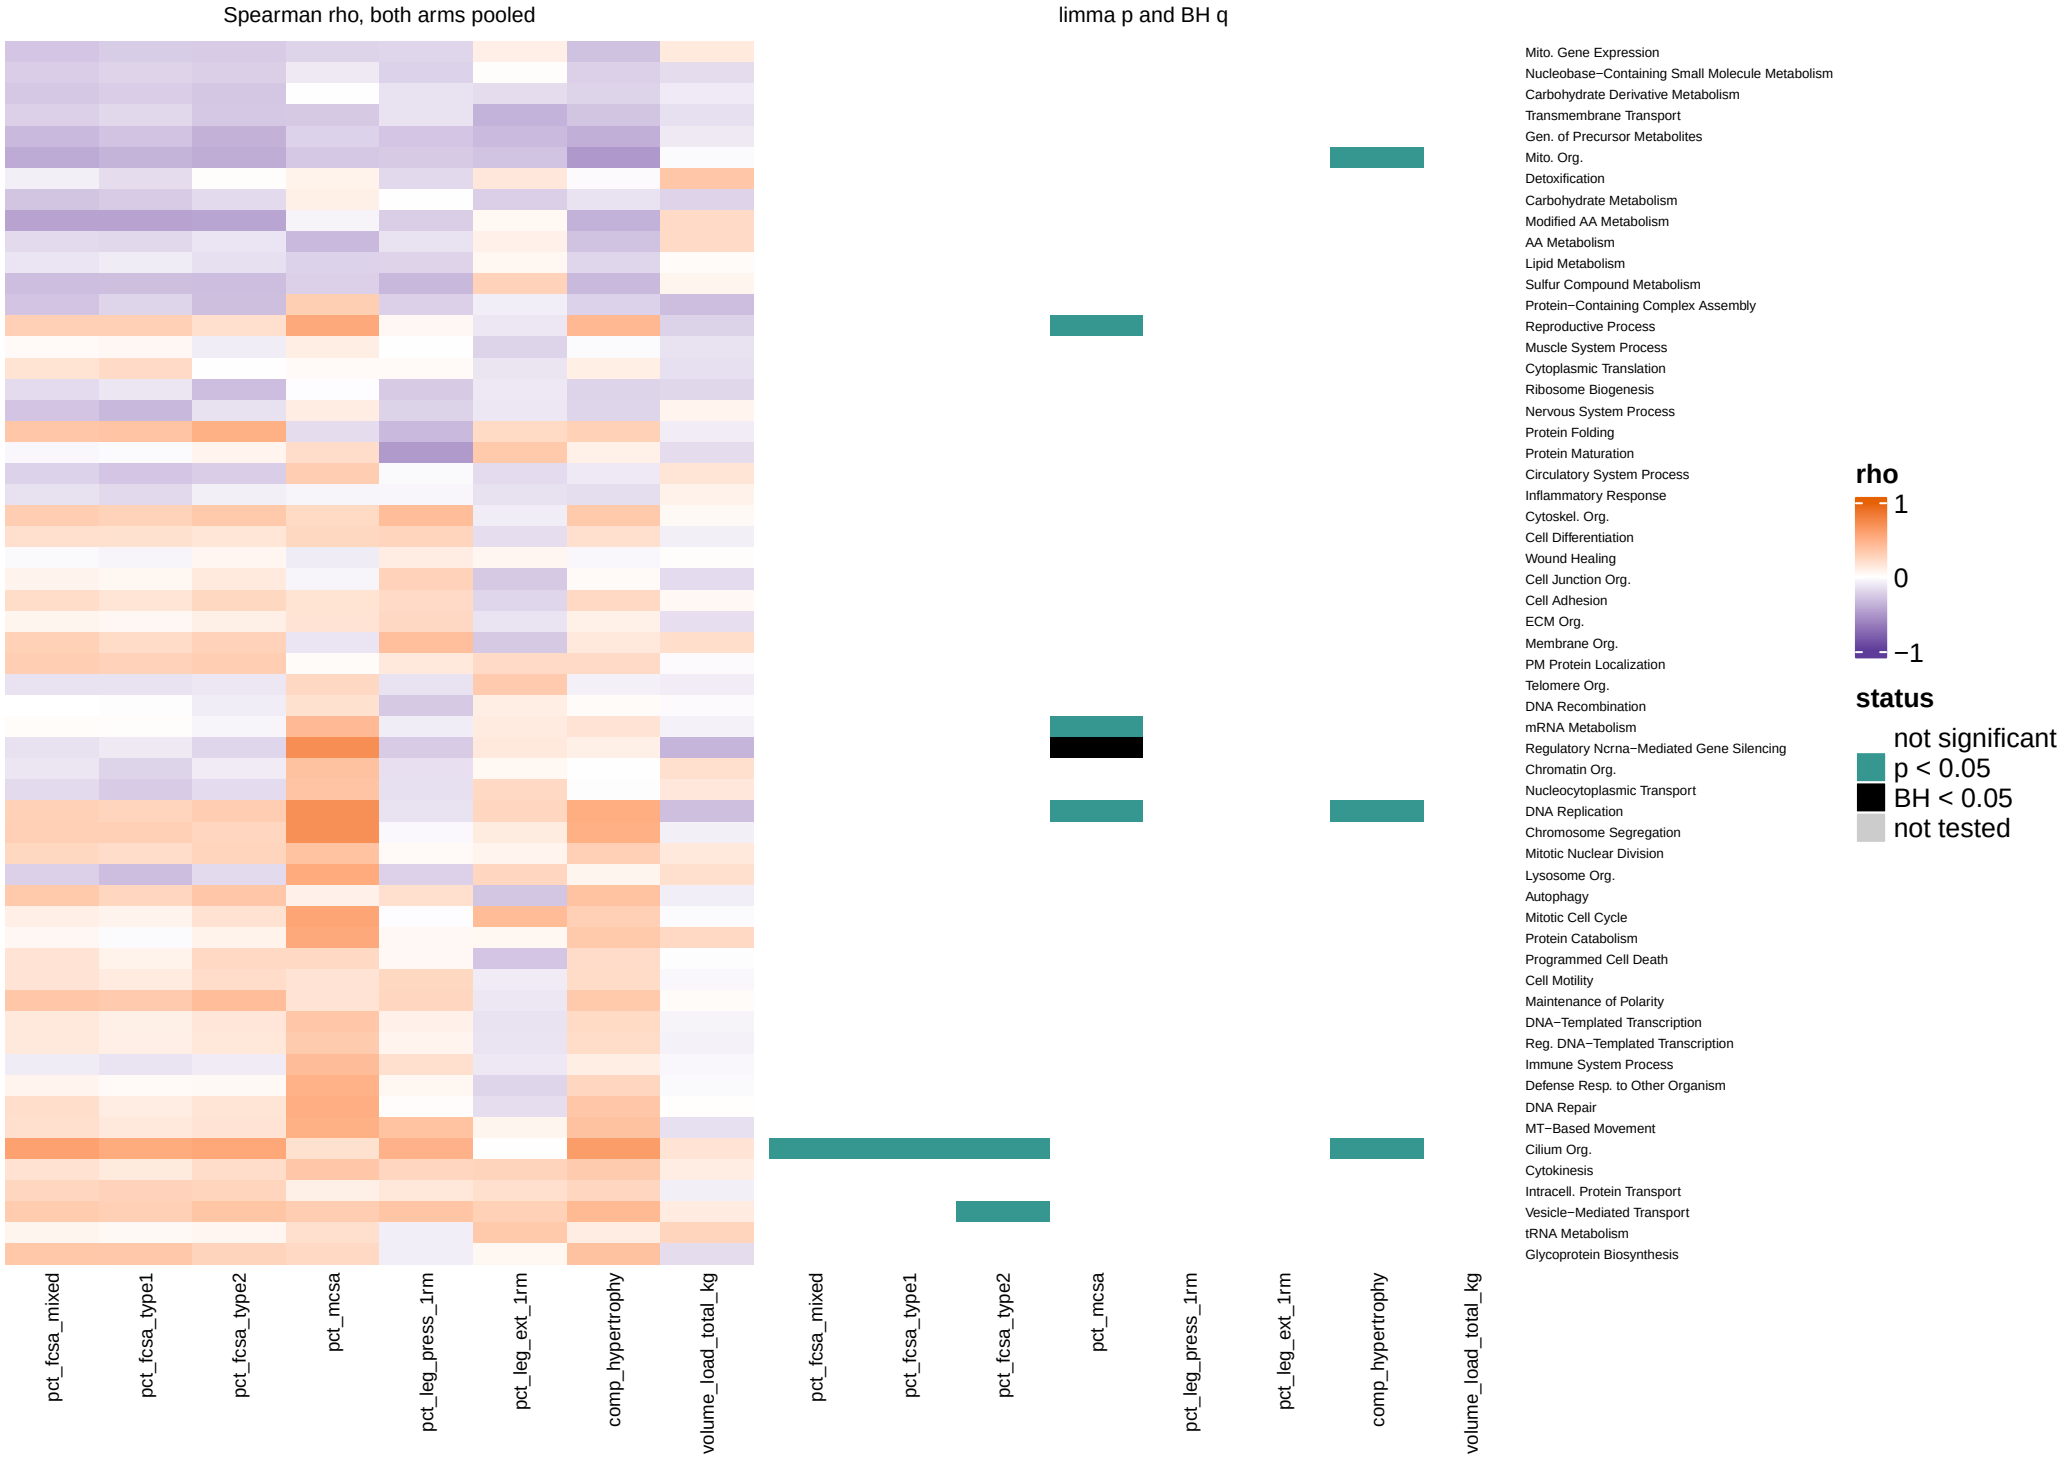


All 58 sets, one row each. Spearman rho between the singscore (change, T2 to T3) and each outcome; status from limma. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/02_sets.xlsx, change_score.

Change score overview, baseline_level window: GO_Slim

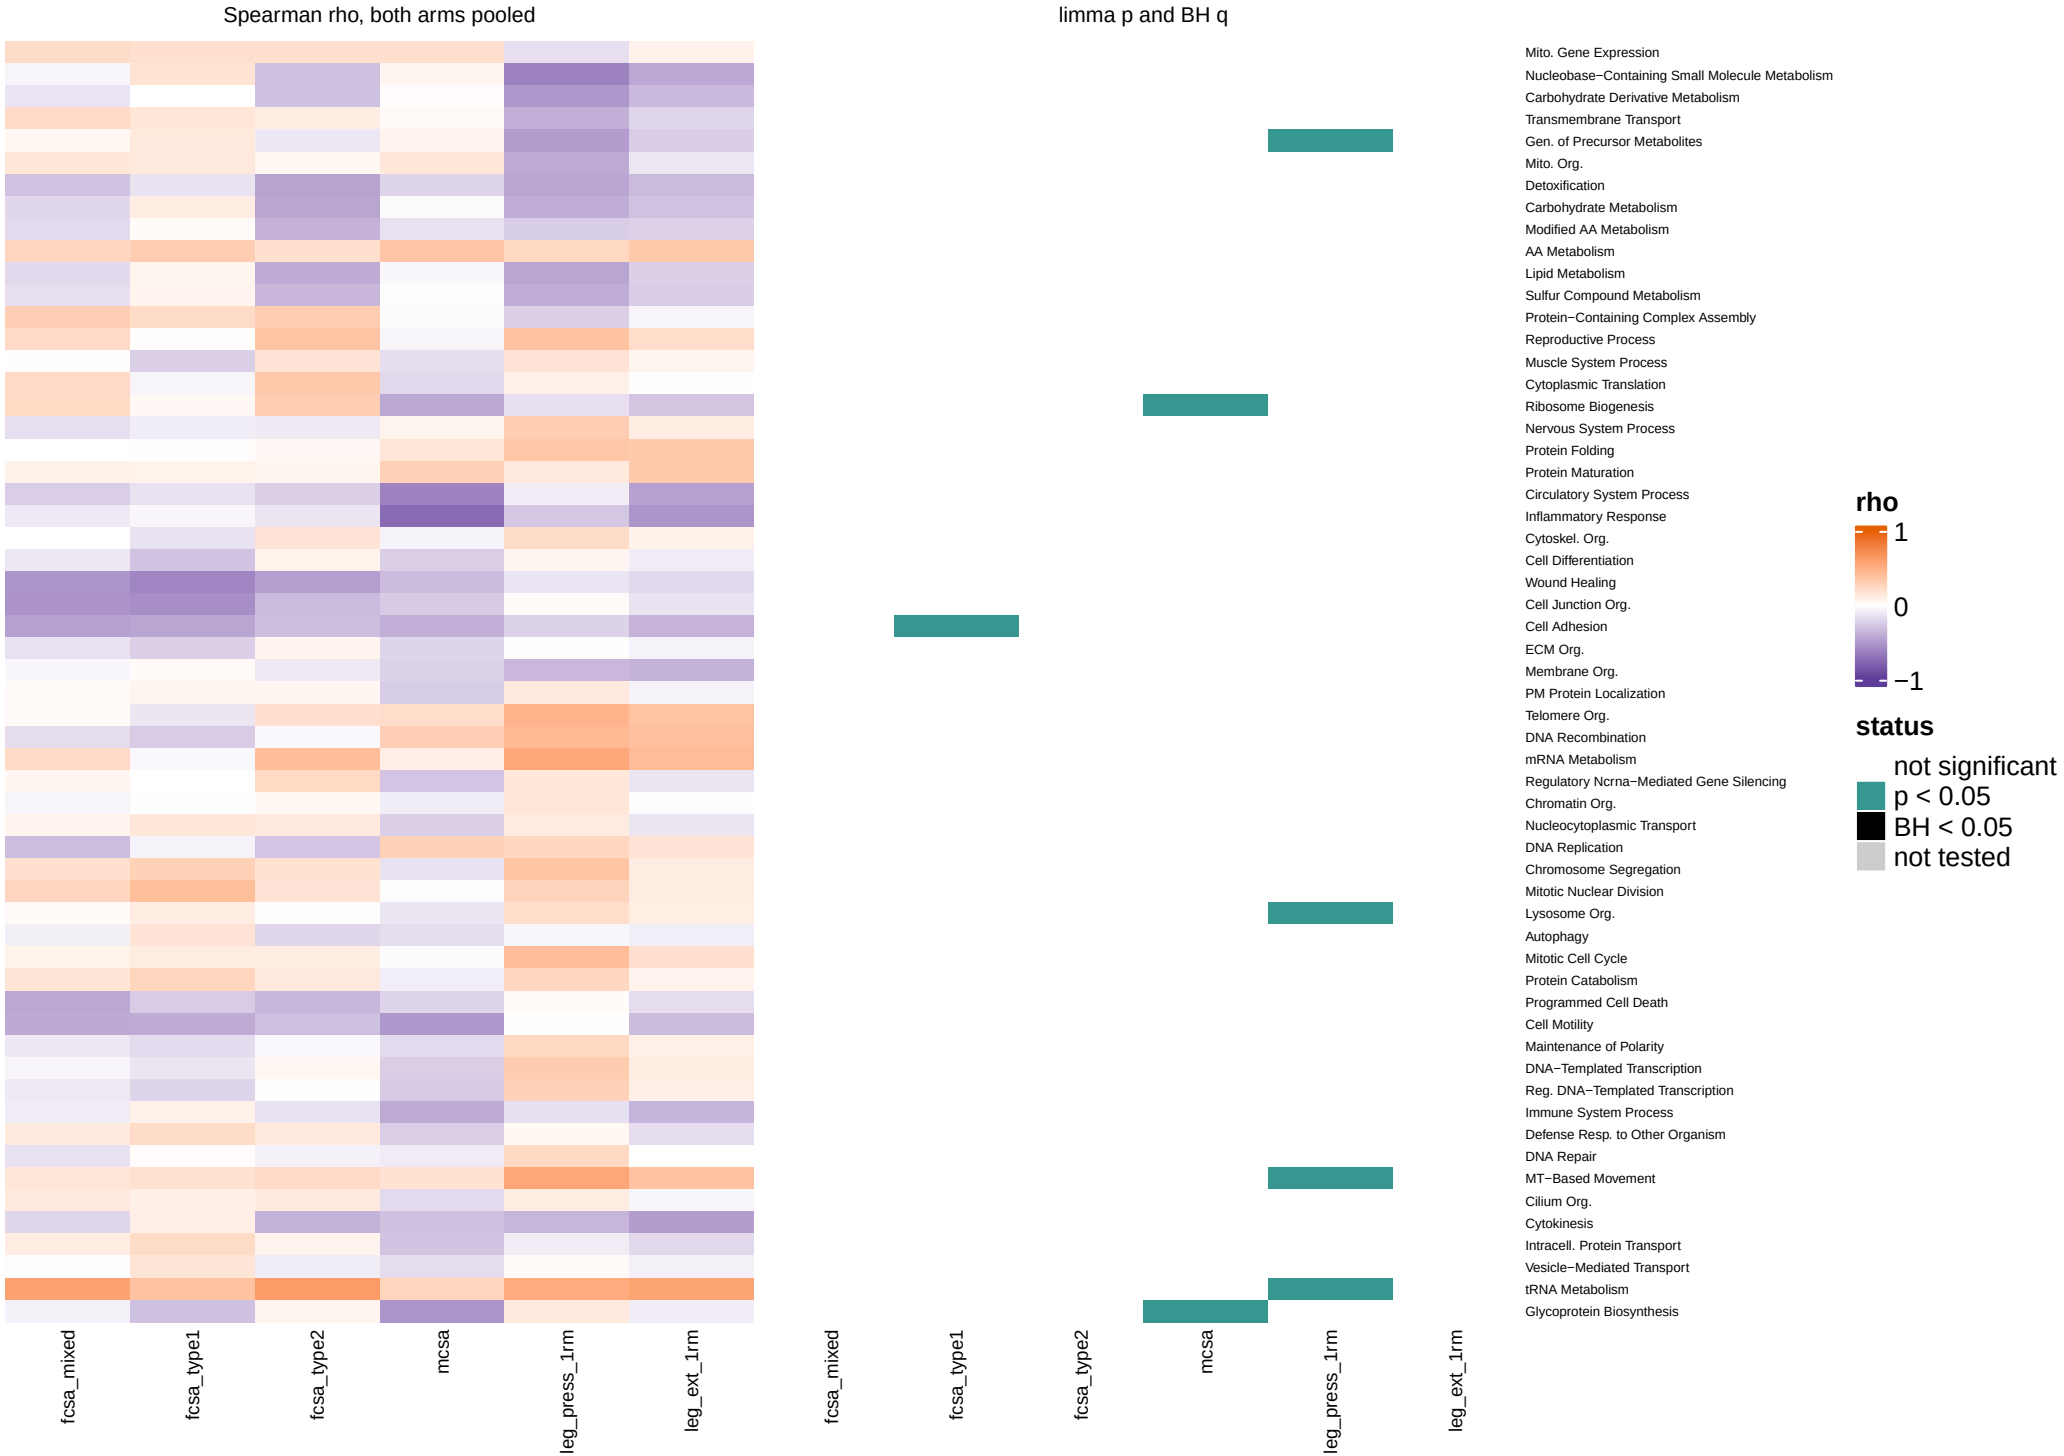


All 58 sets, one row each. Spearman rho between the singscore (T1 level) and each outcome; status from limma. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/02_sets.xlsx, change_score.

Change score overview, post_level window: GO_Slim

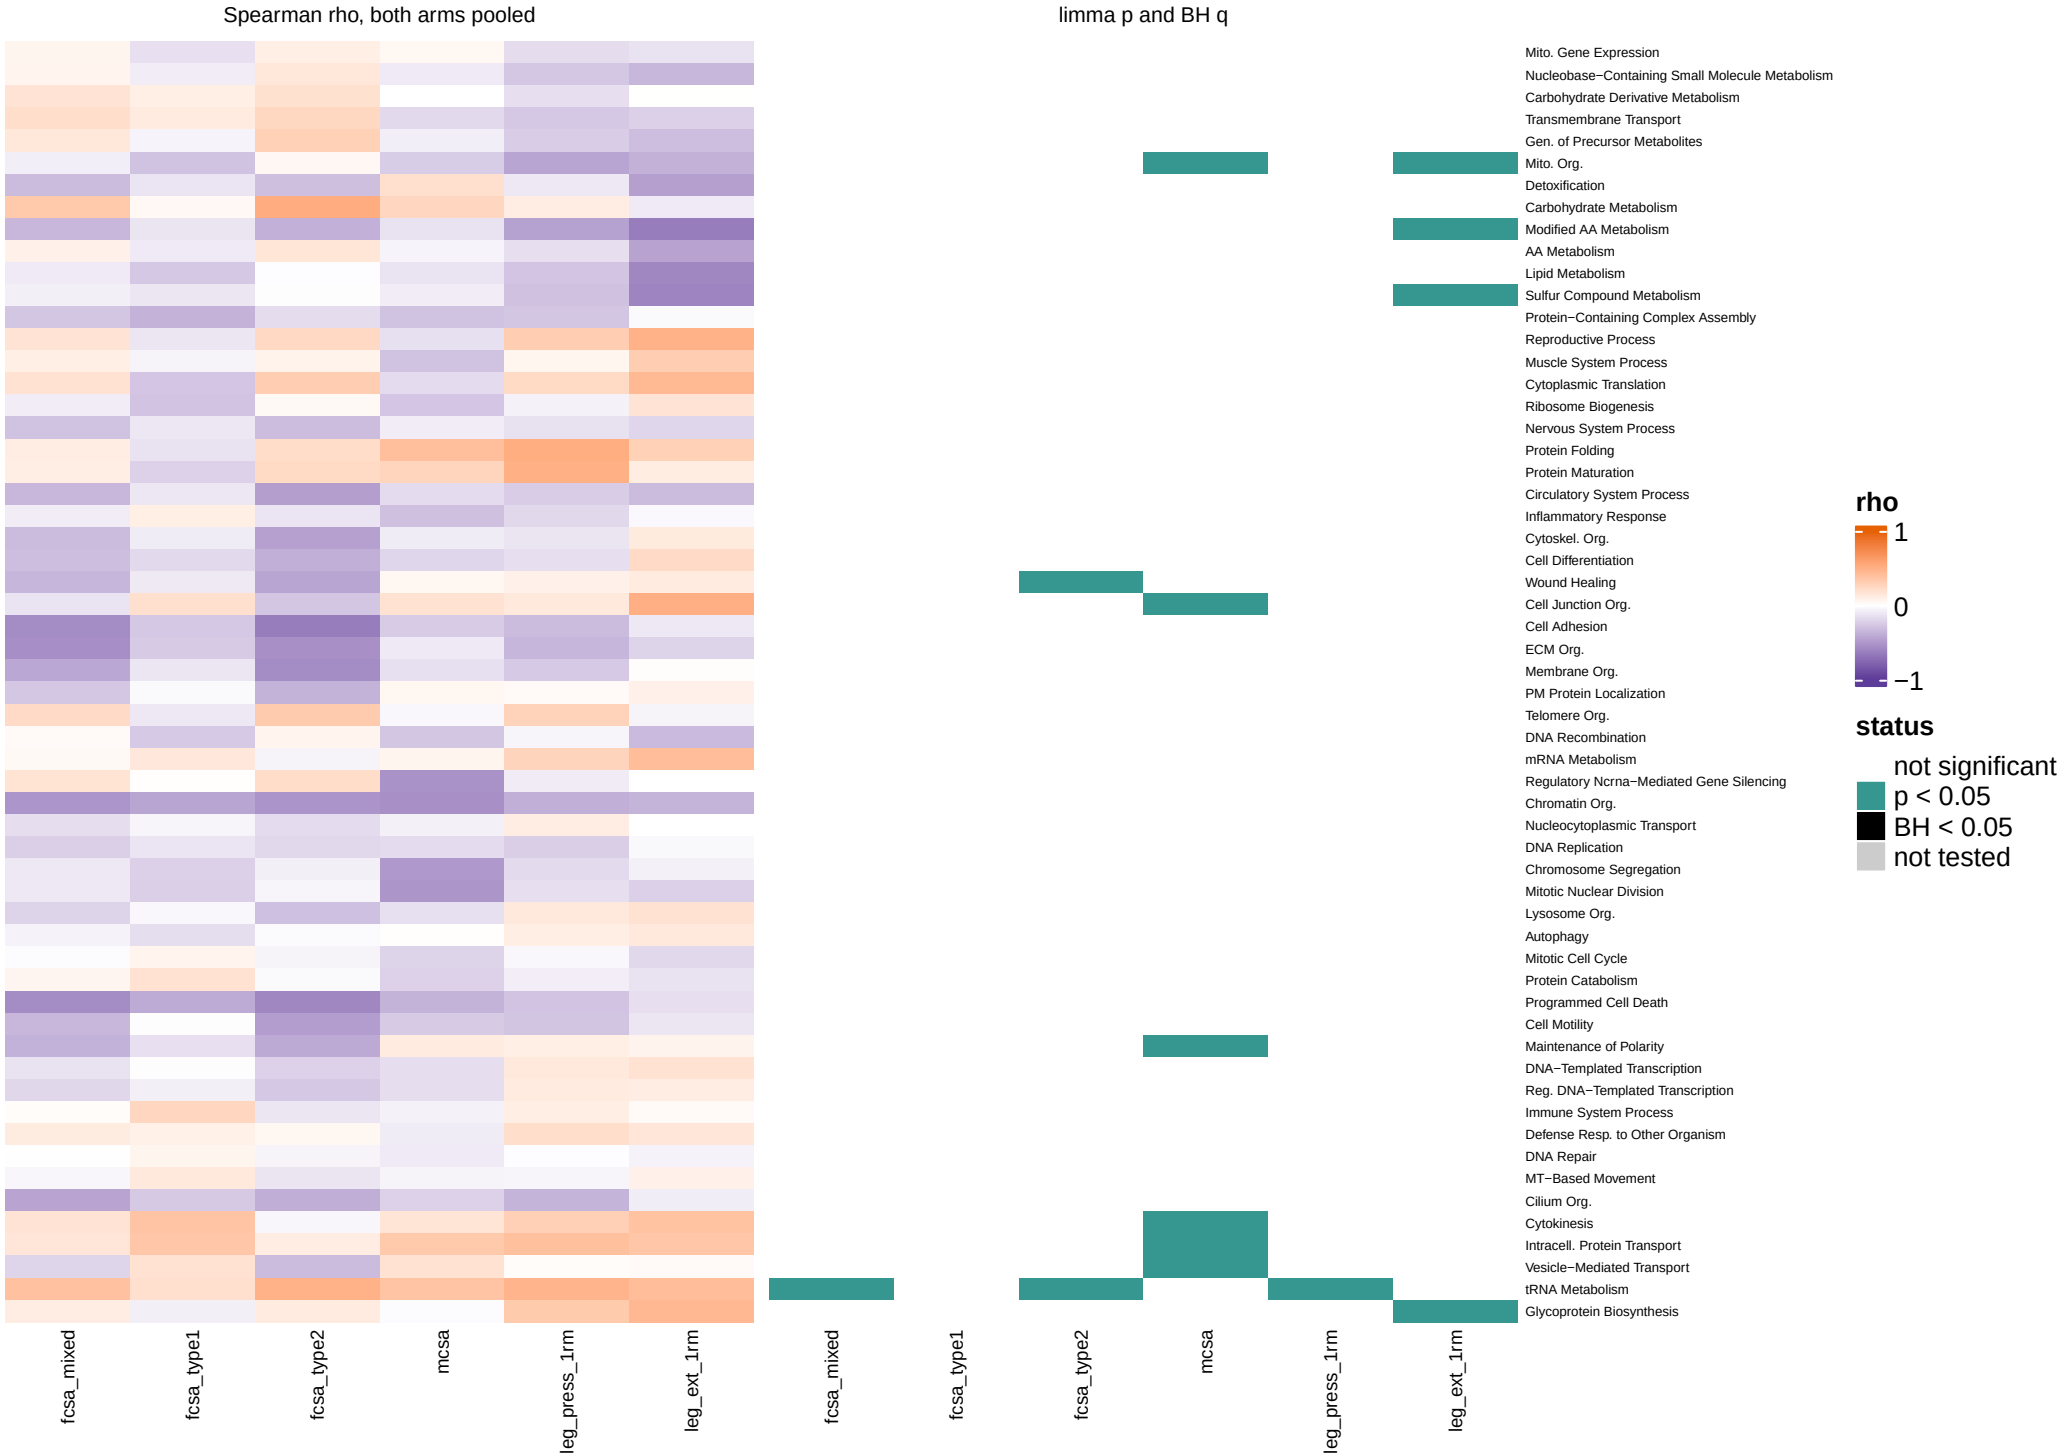

All 58 sets, one row each. Spearman rho between the singscore (T2 level) and each outcome; status from limma. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/02_sets.xlsx, change_score.


Change score overview, post_bout_level window: GO_Slim

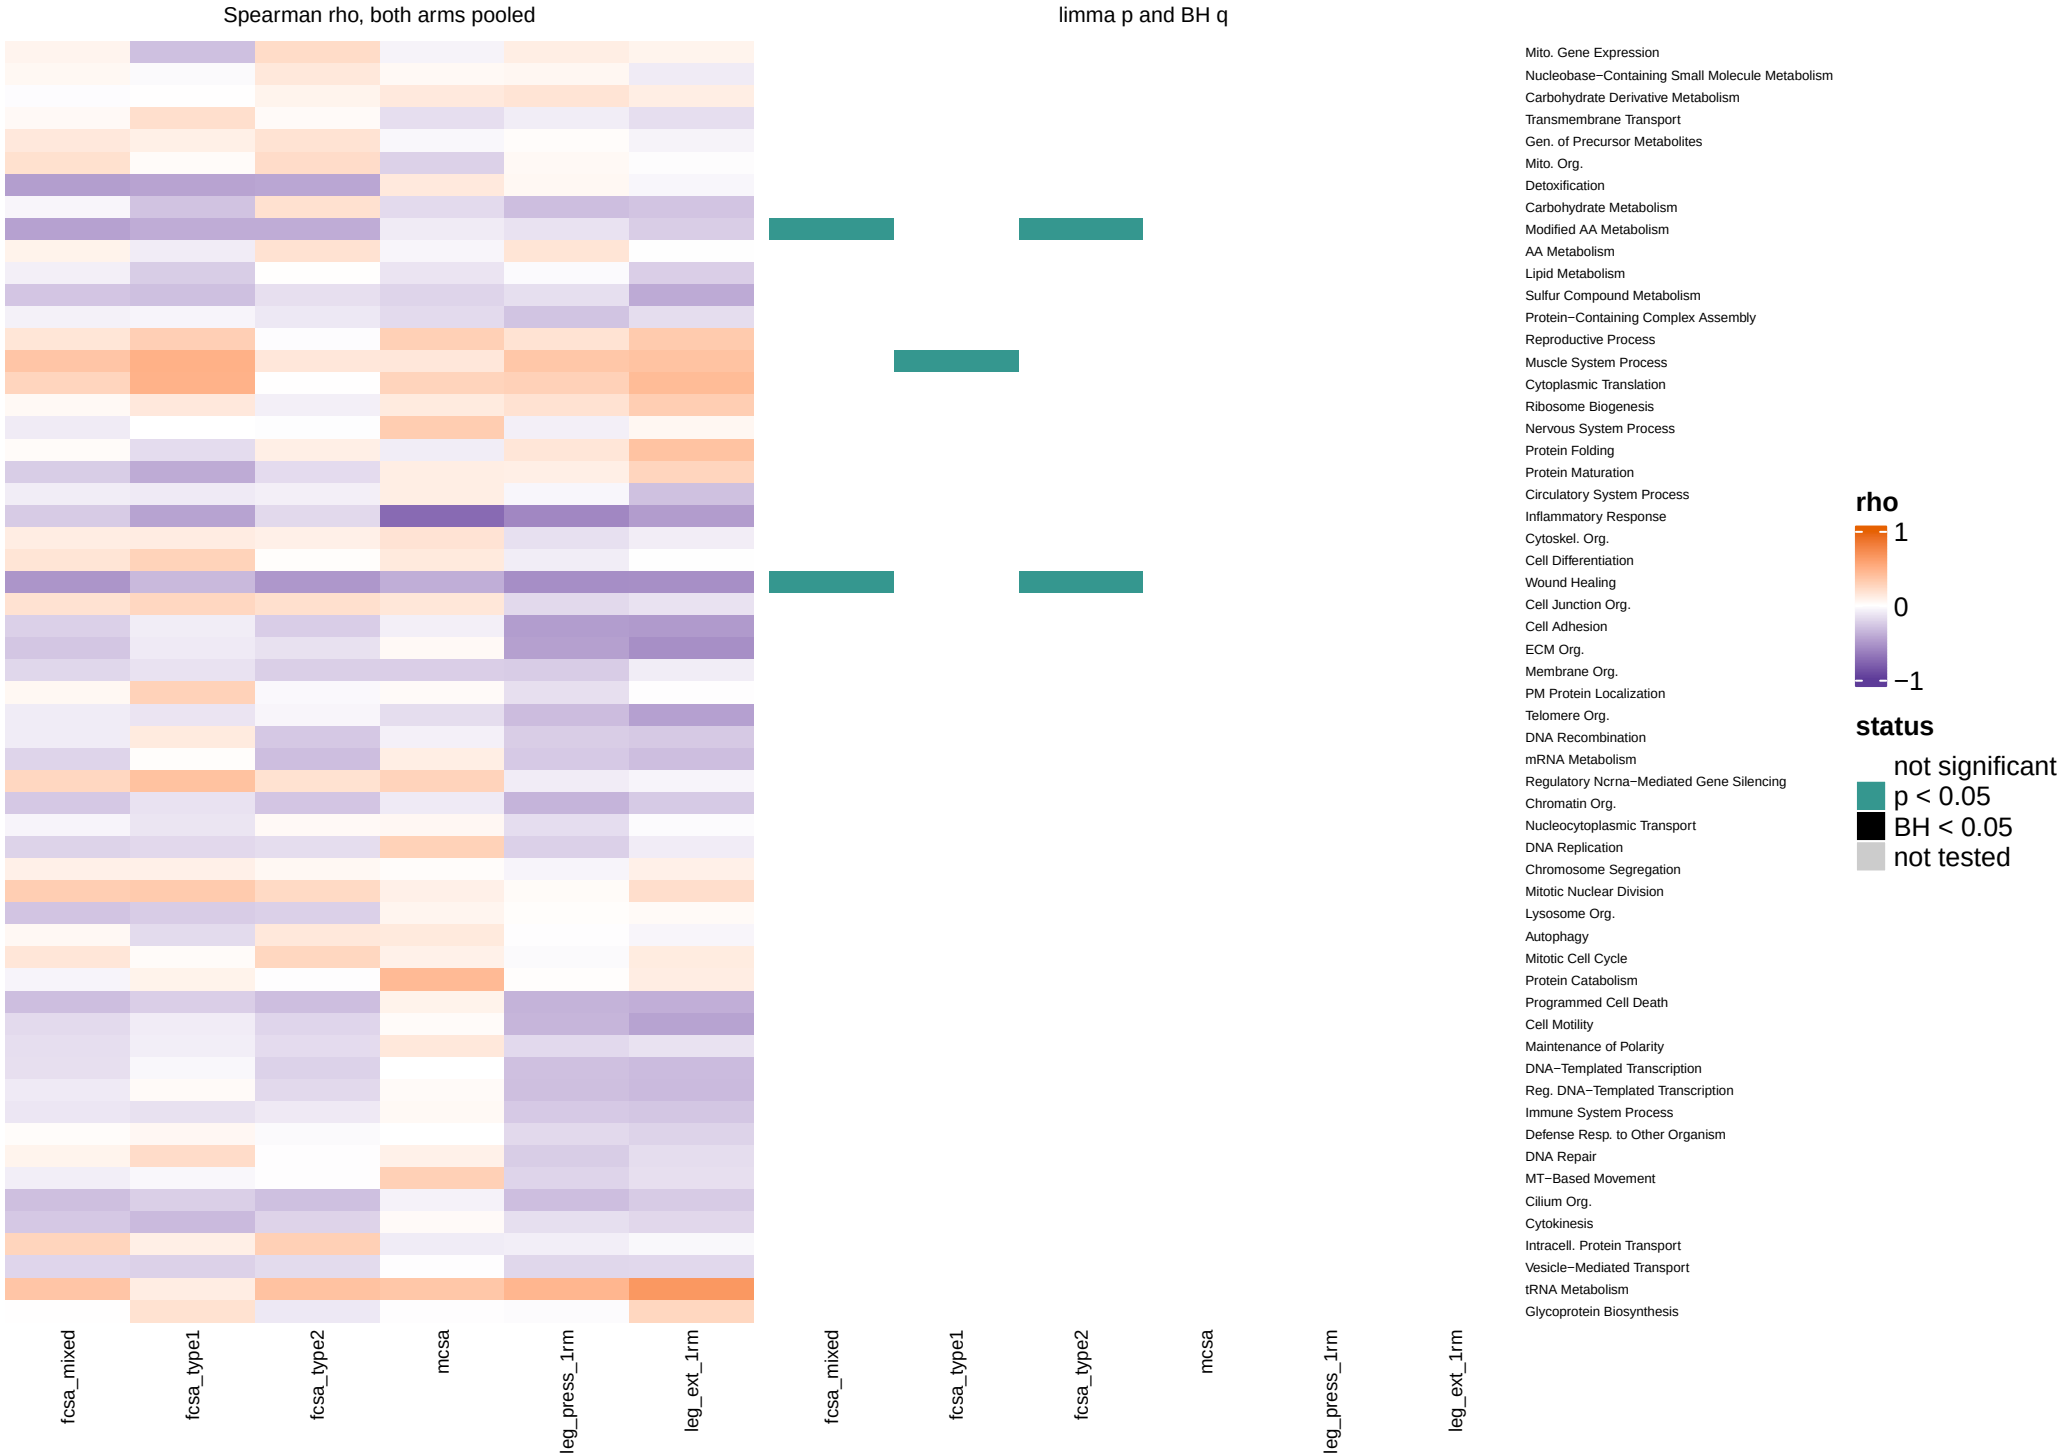

All 58 sets, one row each. Spearman rho between the singscore (T3 level) and each outcome; status from limma. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/02_sets.xlsx, change_score.

fcsa_mixed, within−person term


64 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 1 of 6.

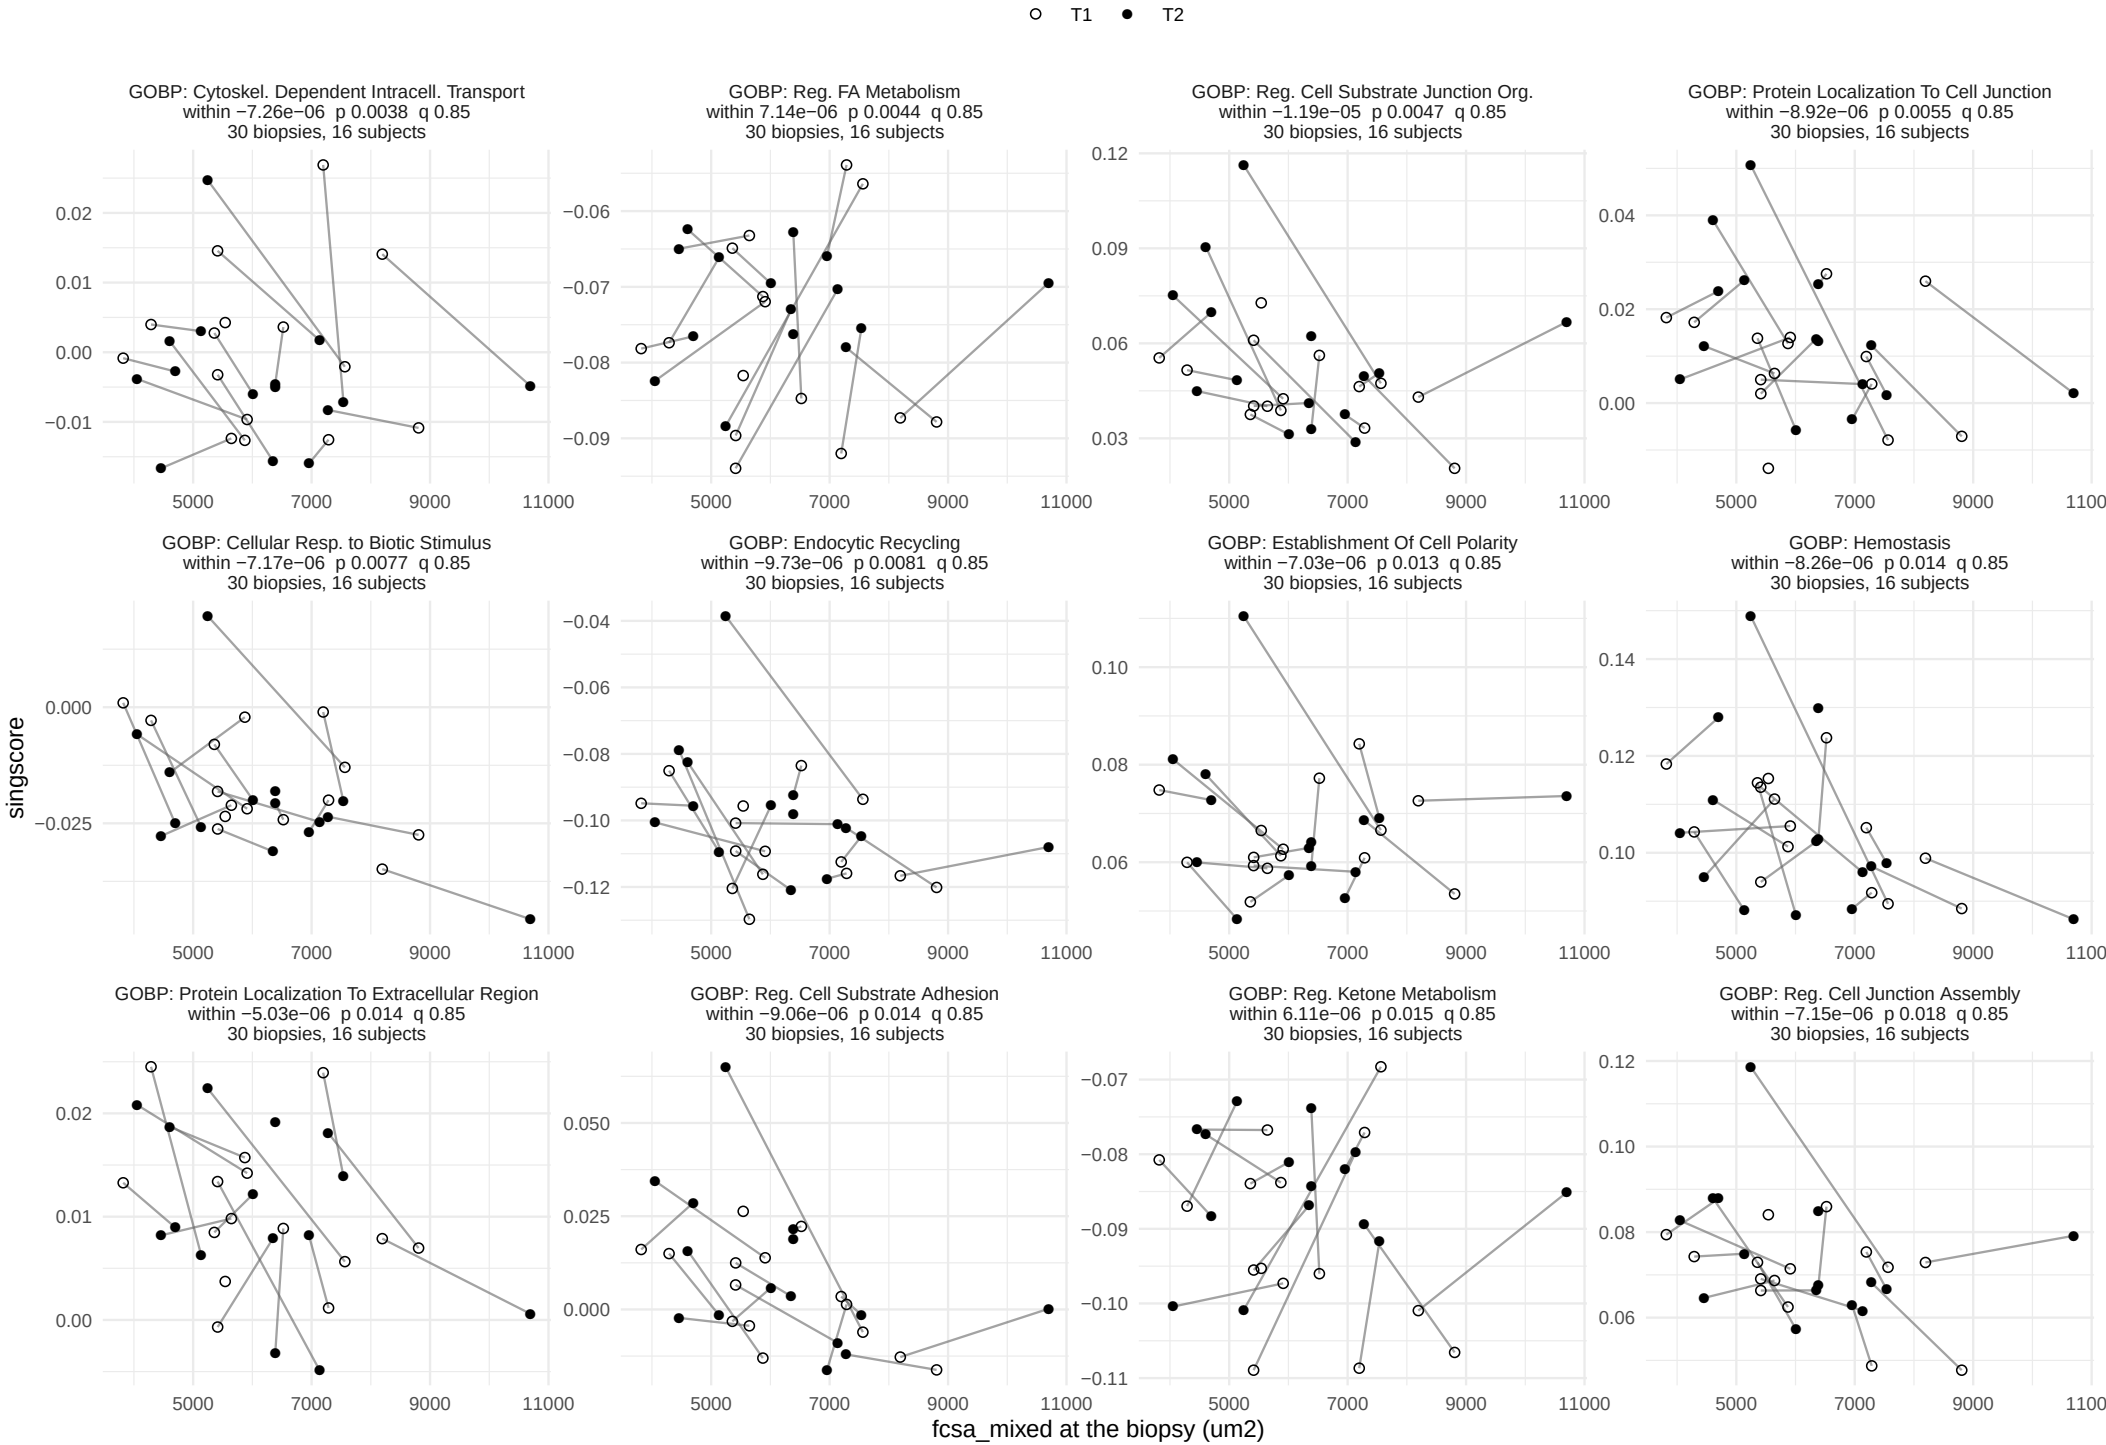

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/02_sets.xlsx, model.

fcsa_mixed, within−person term


64 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 2 of 6.

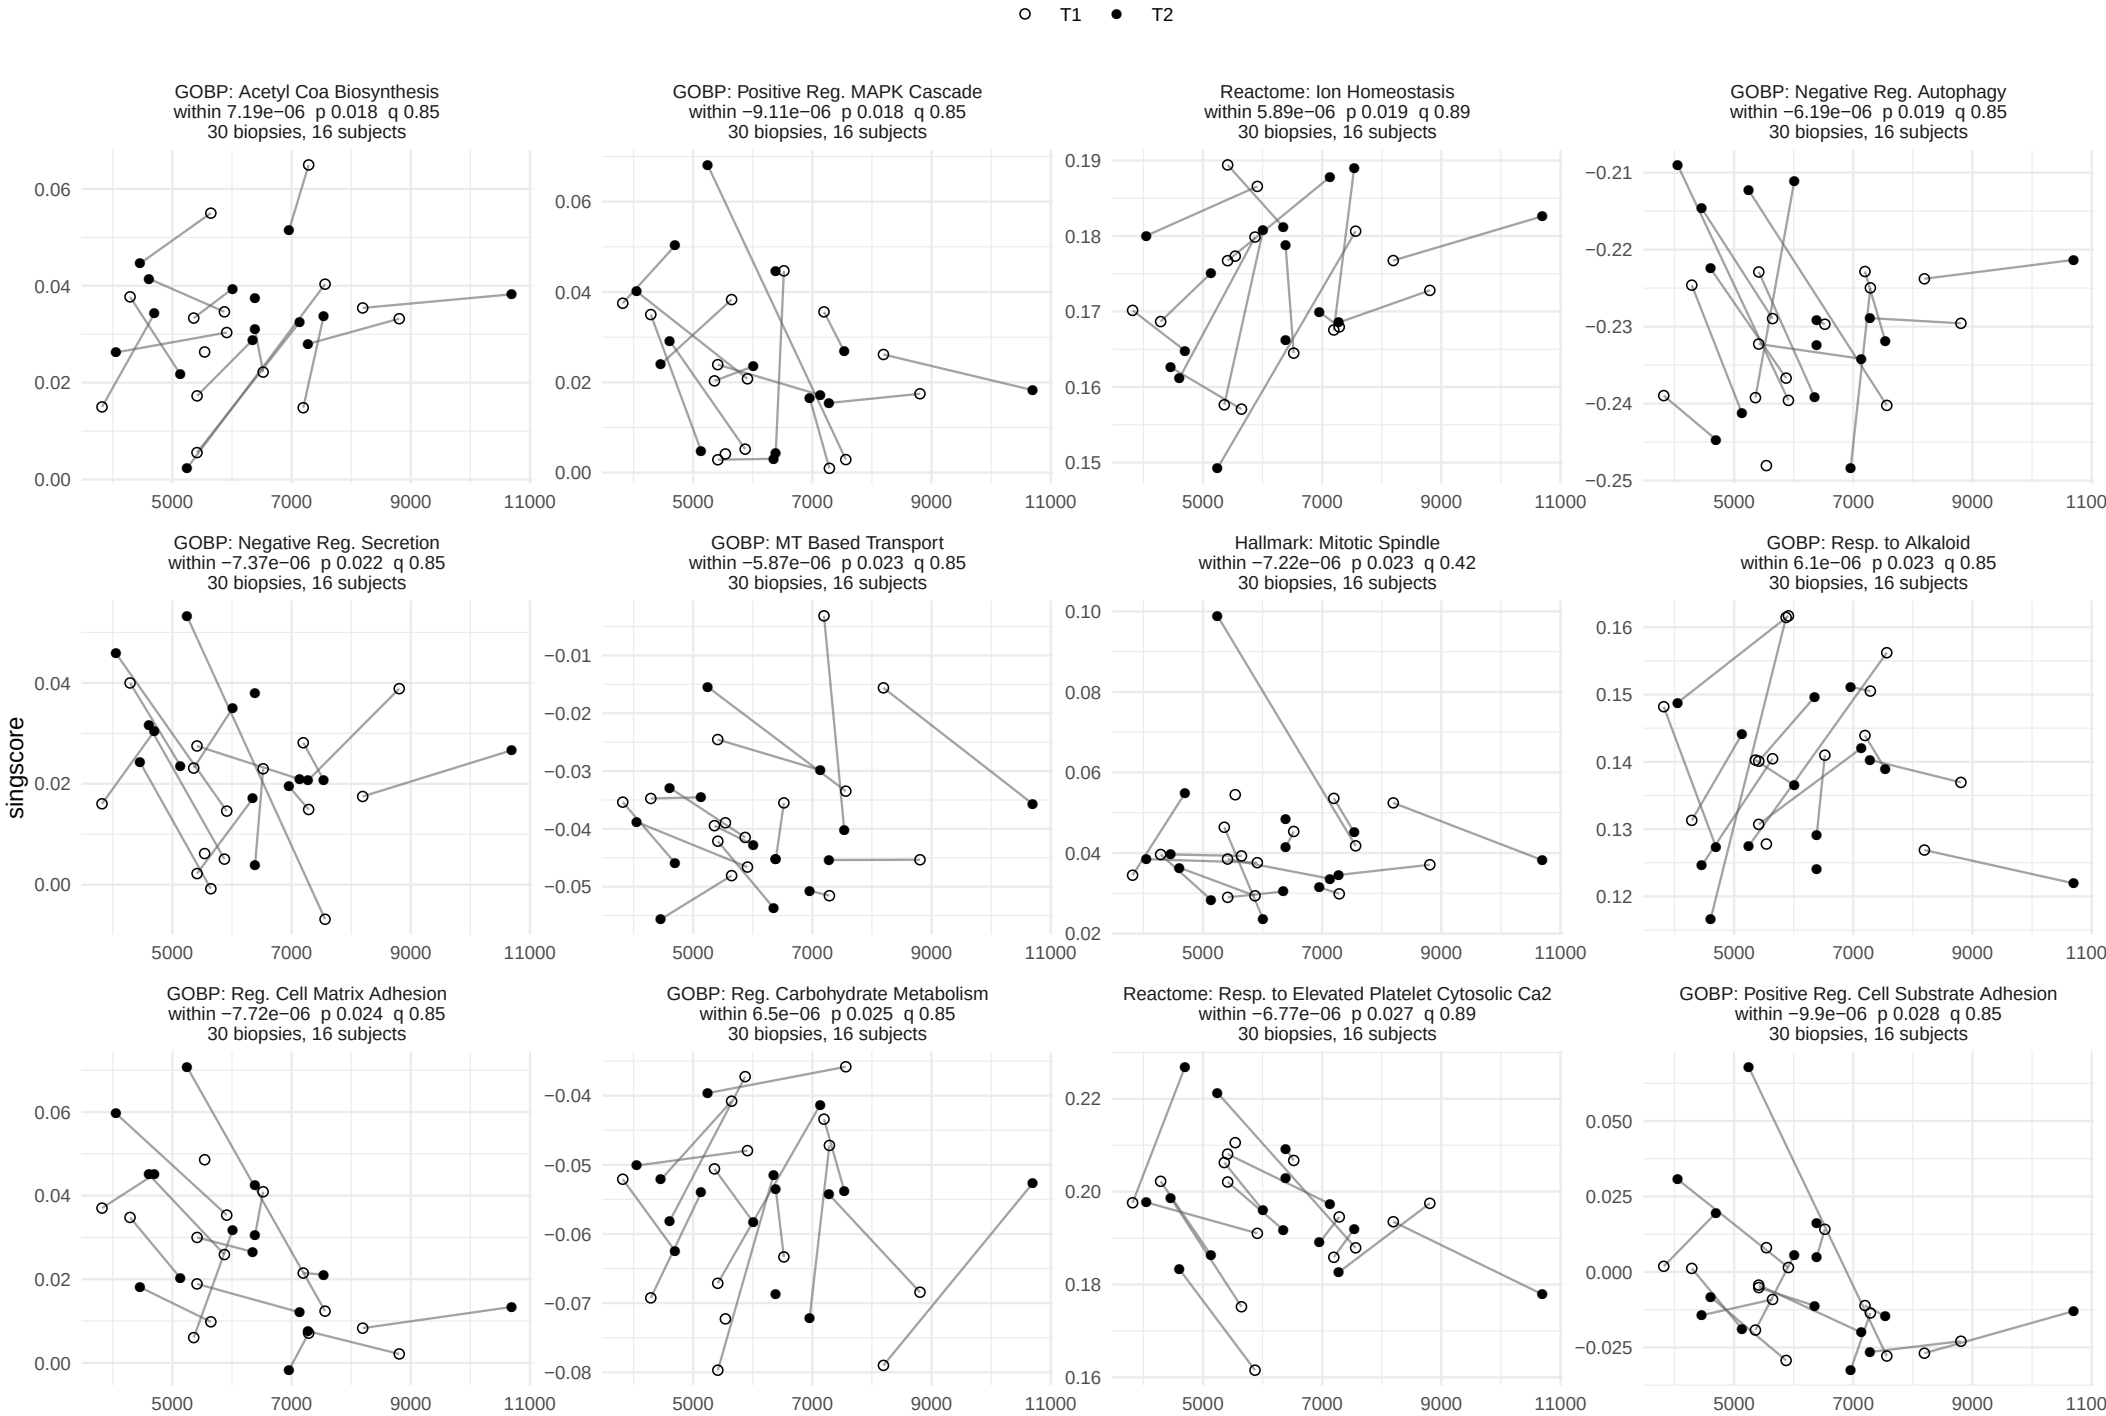

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/02_sets.xlsx, model.

fcsa_mixed, within−person term


64 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 3 of 6.

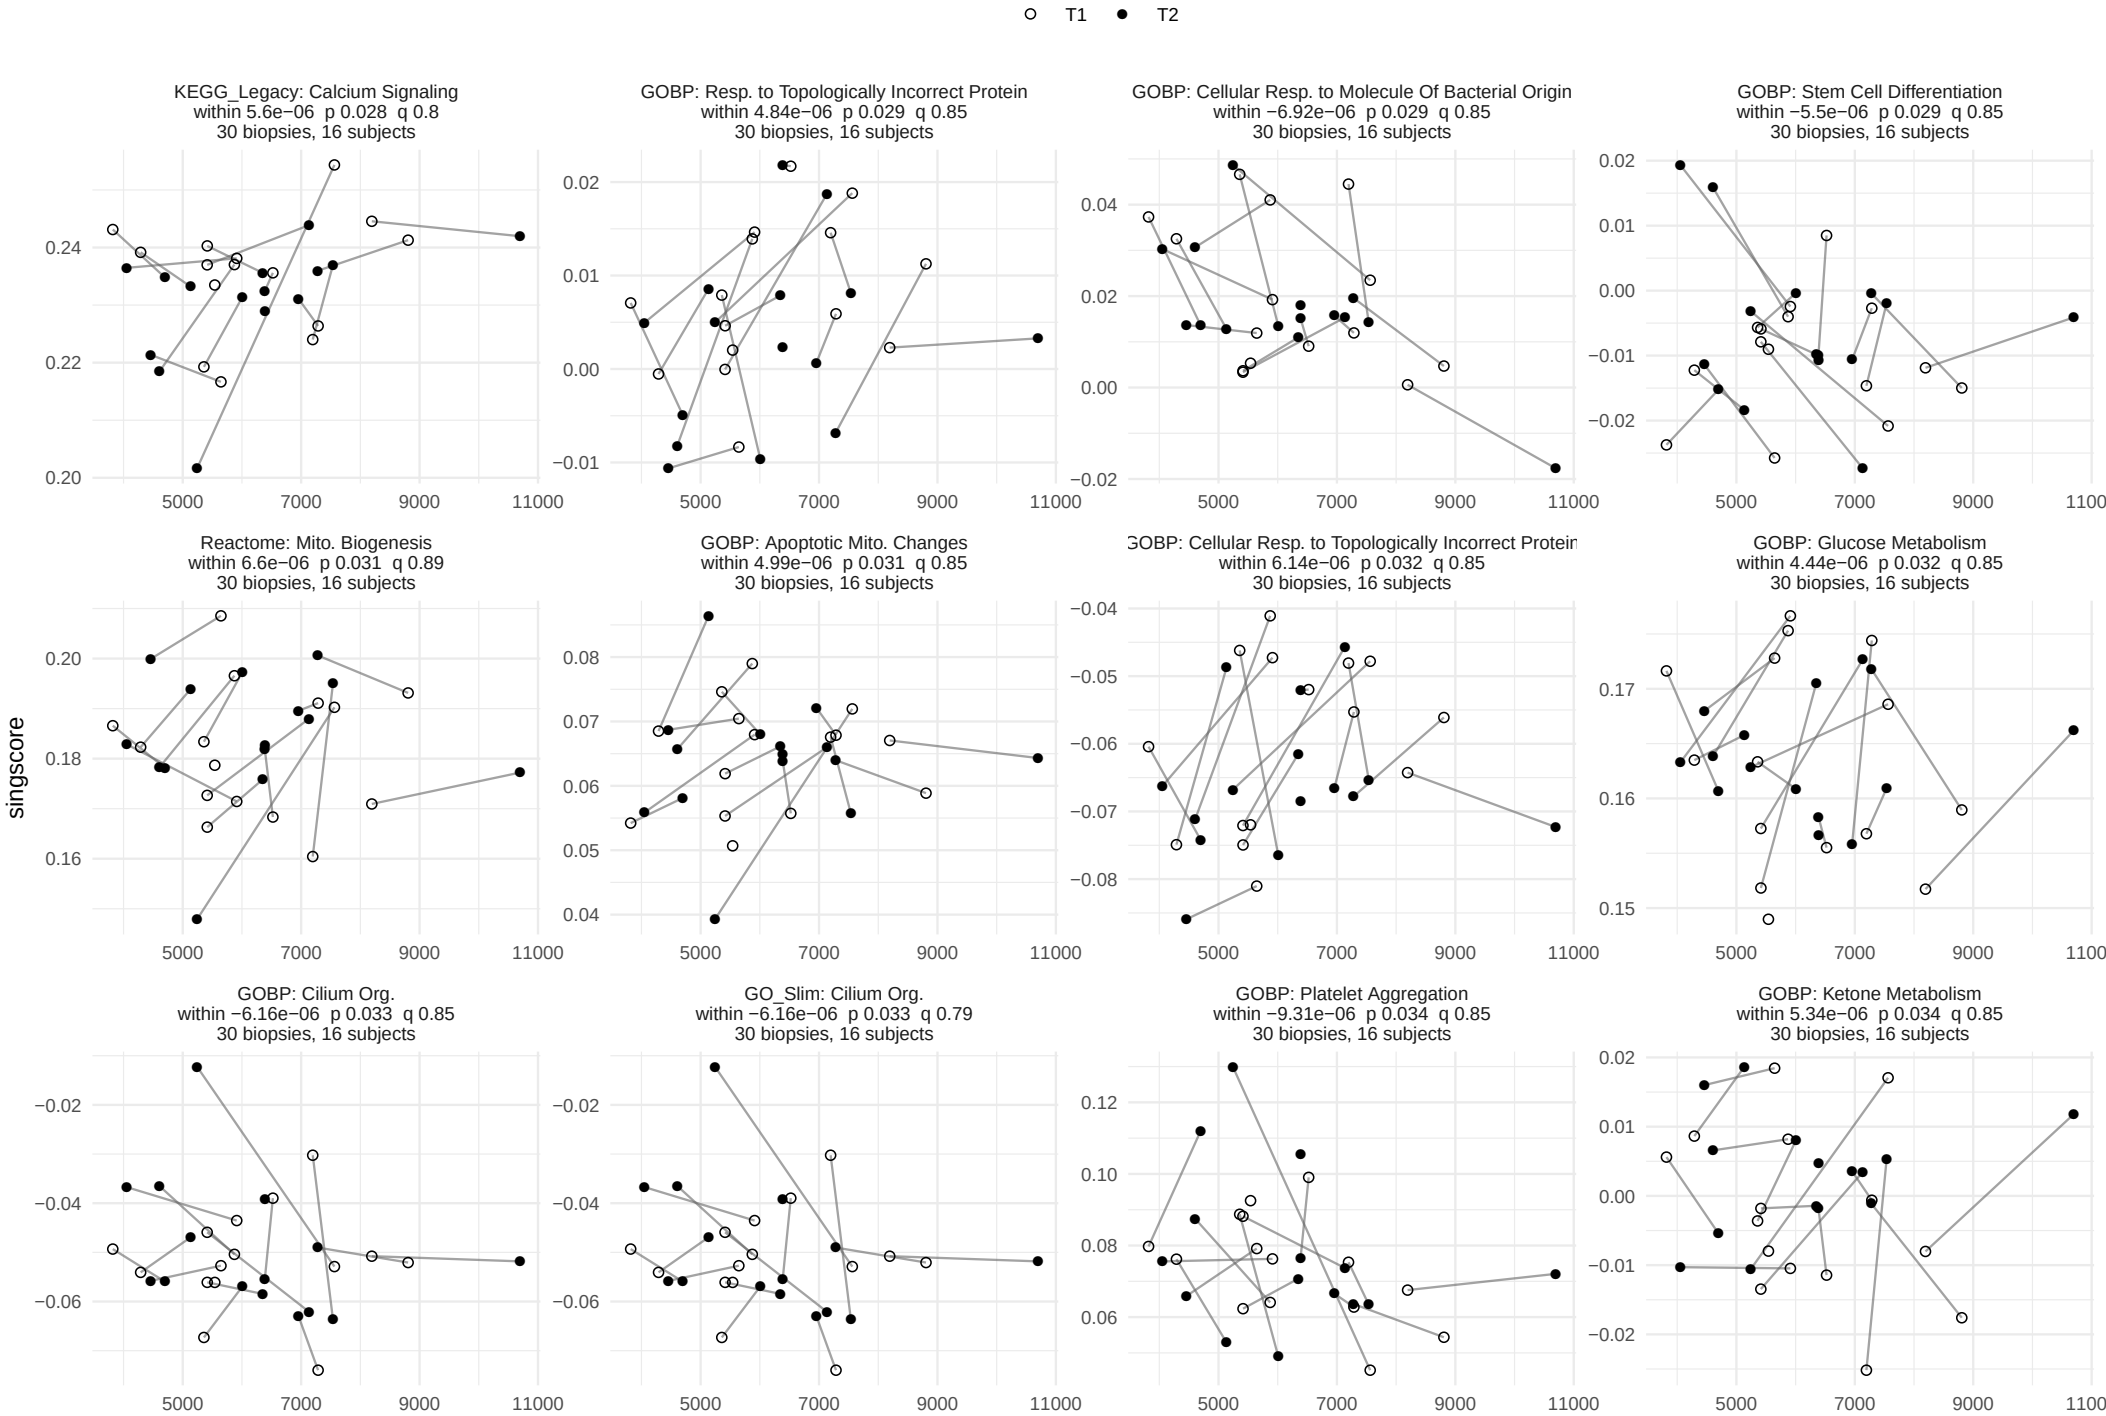

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/02_sets.xlsx, model.

fcsa_mixed, within−person term


64 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 4 of 6.

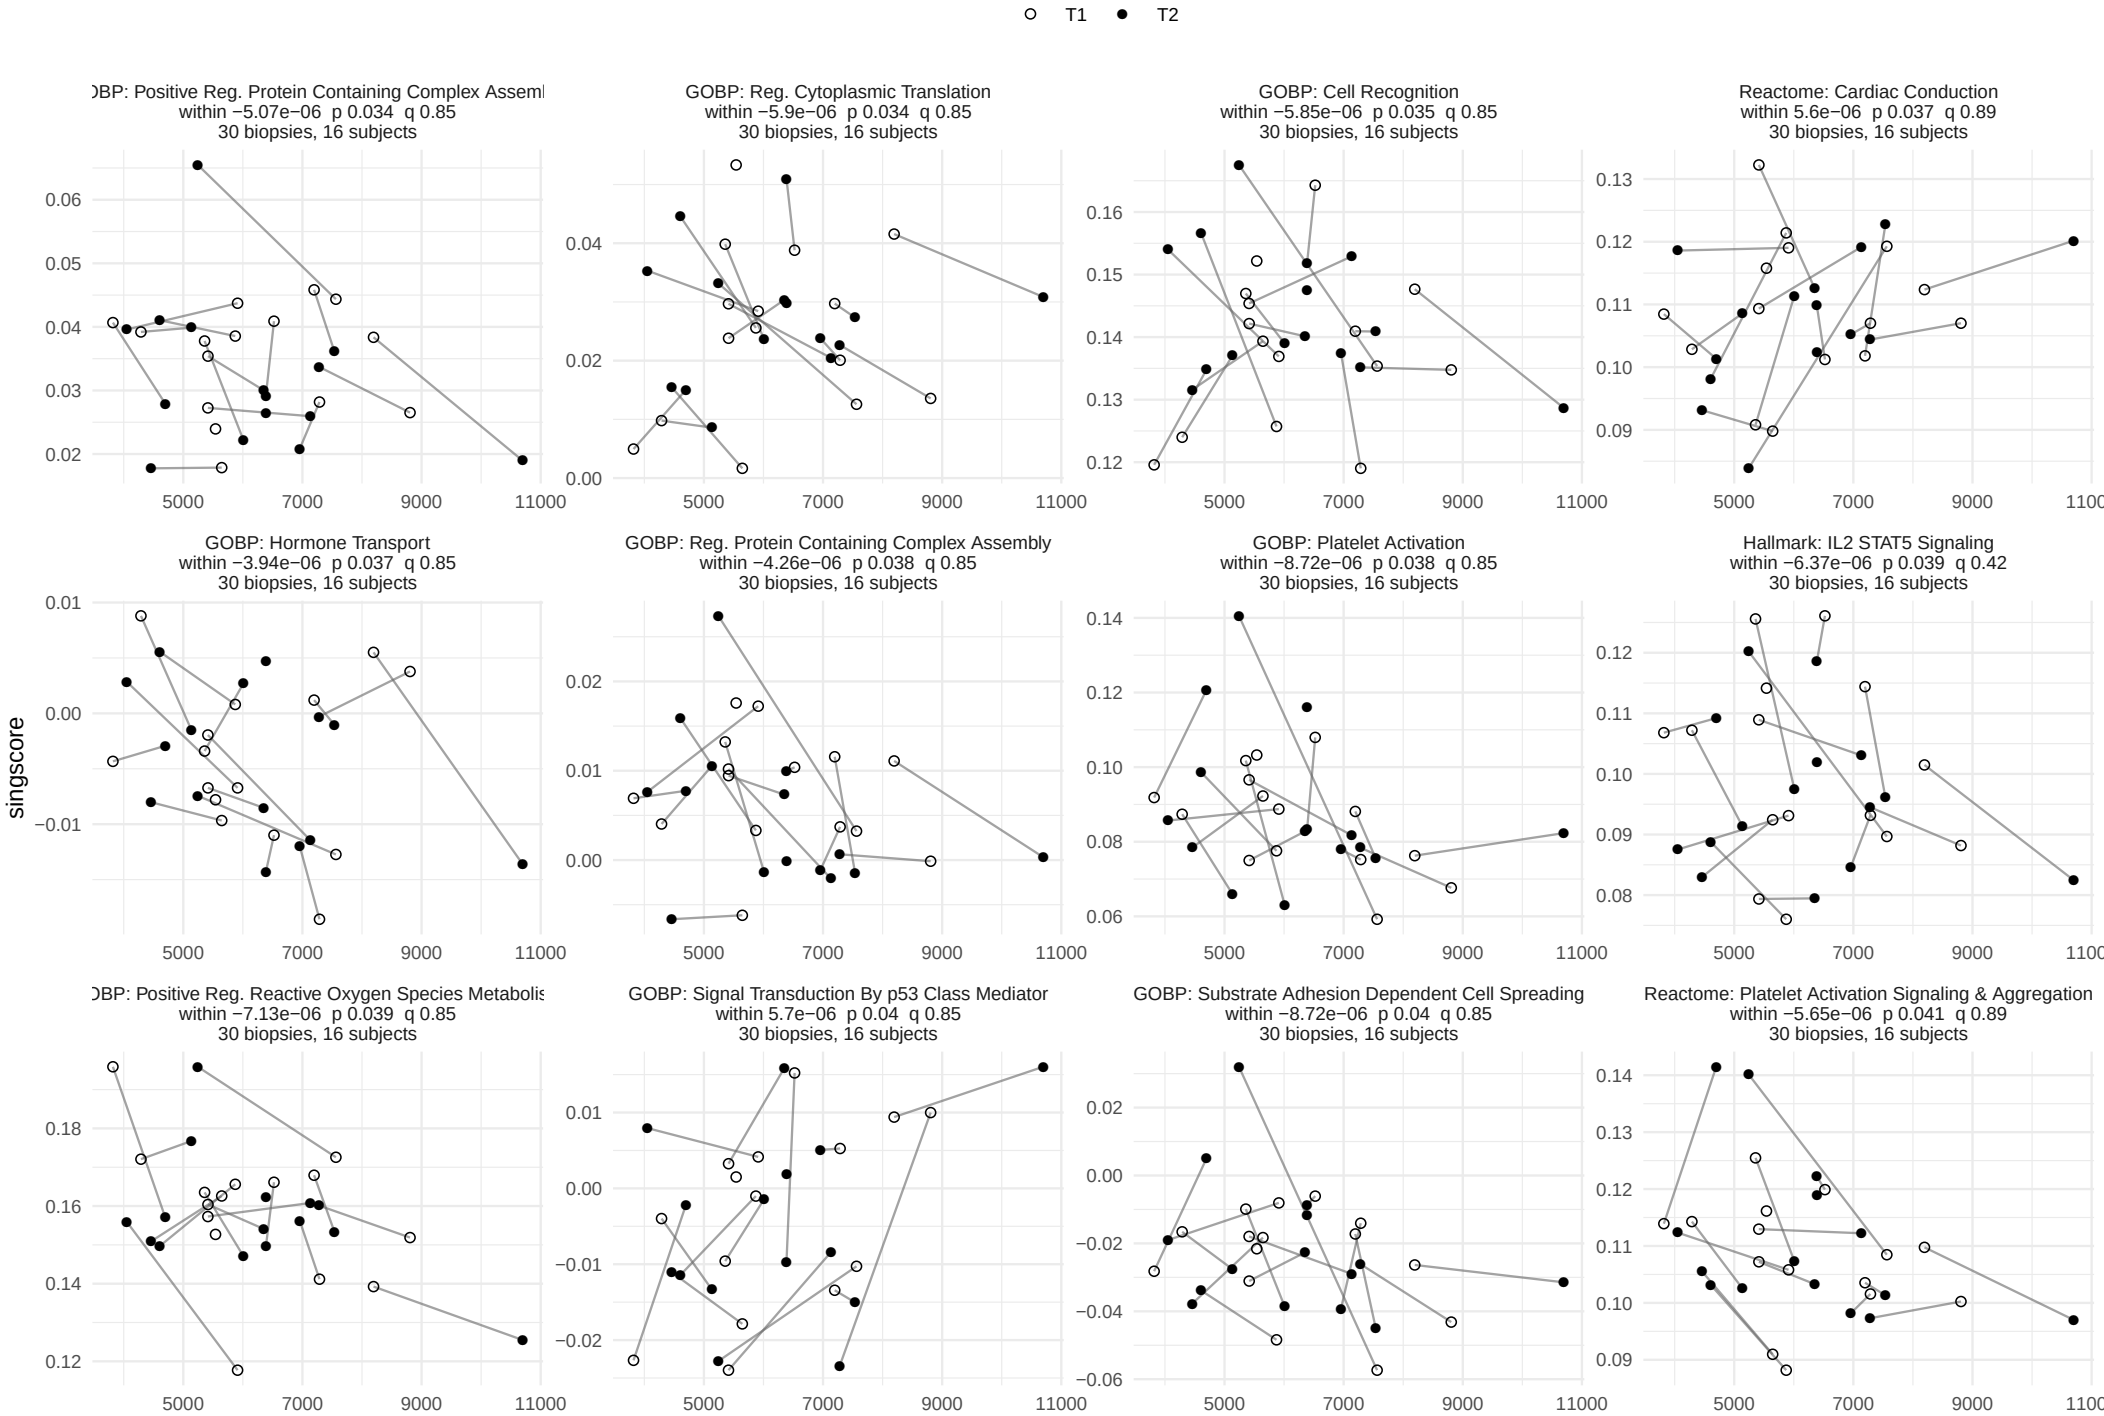

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/02_sets.xlsx, model.

fcsa_mixed, within−person term


64 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 5 of 6.

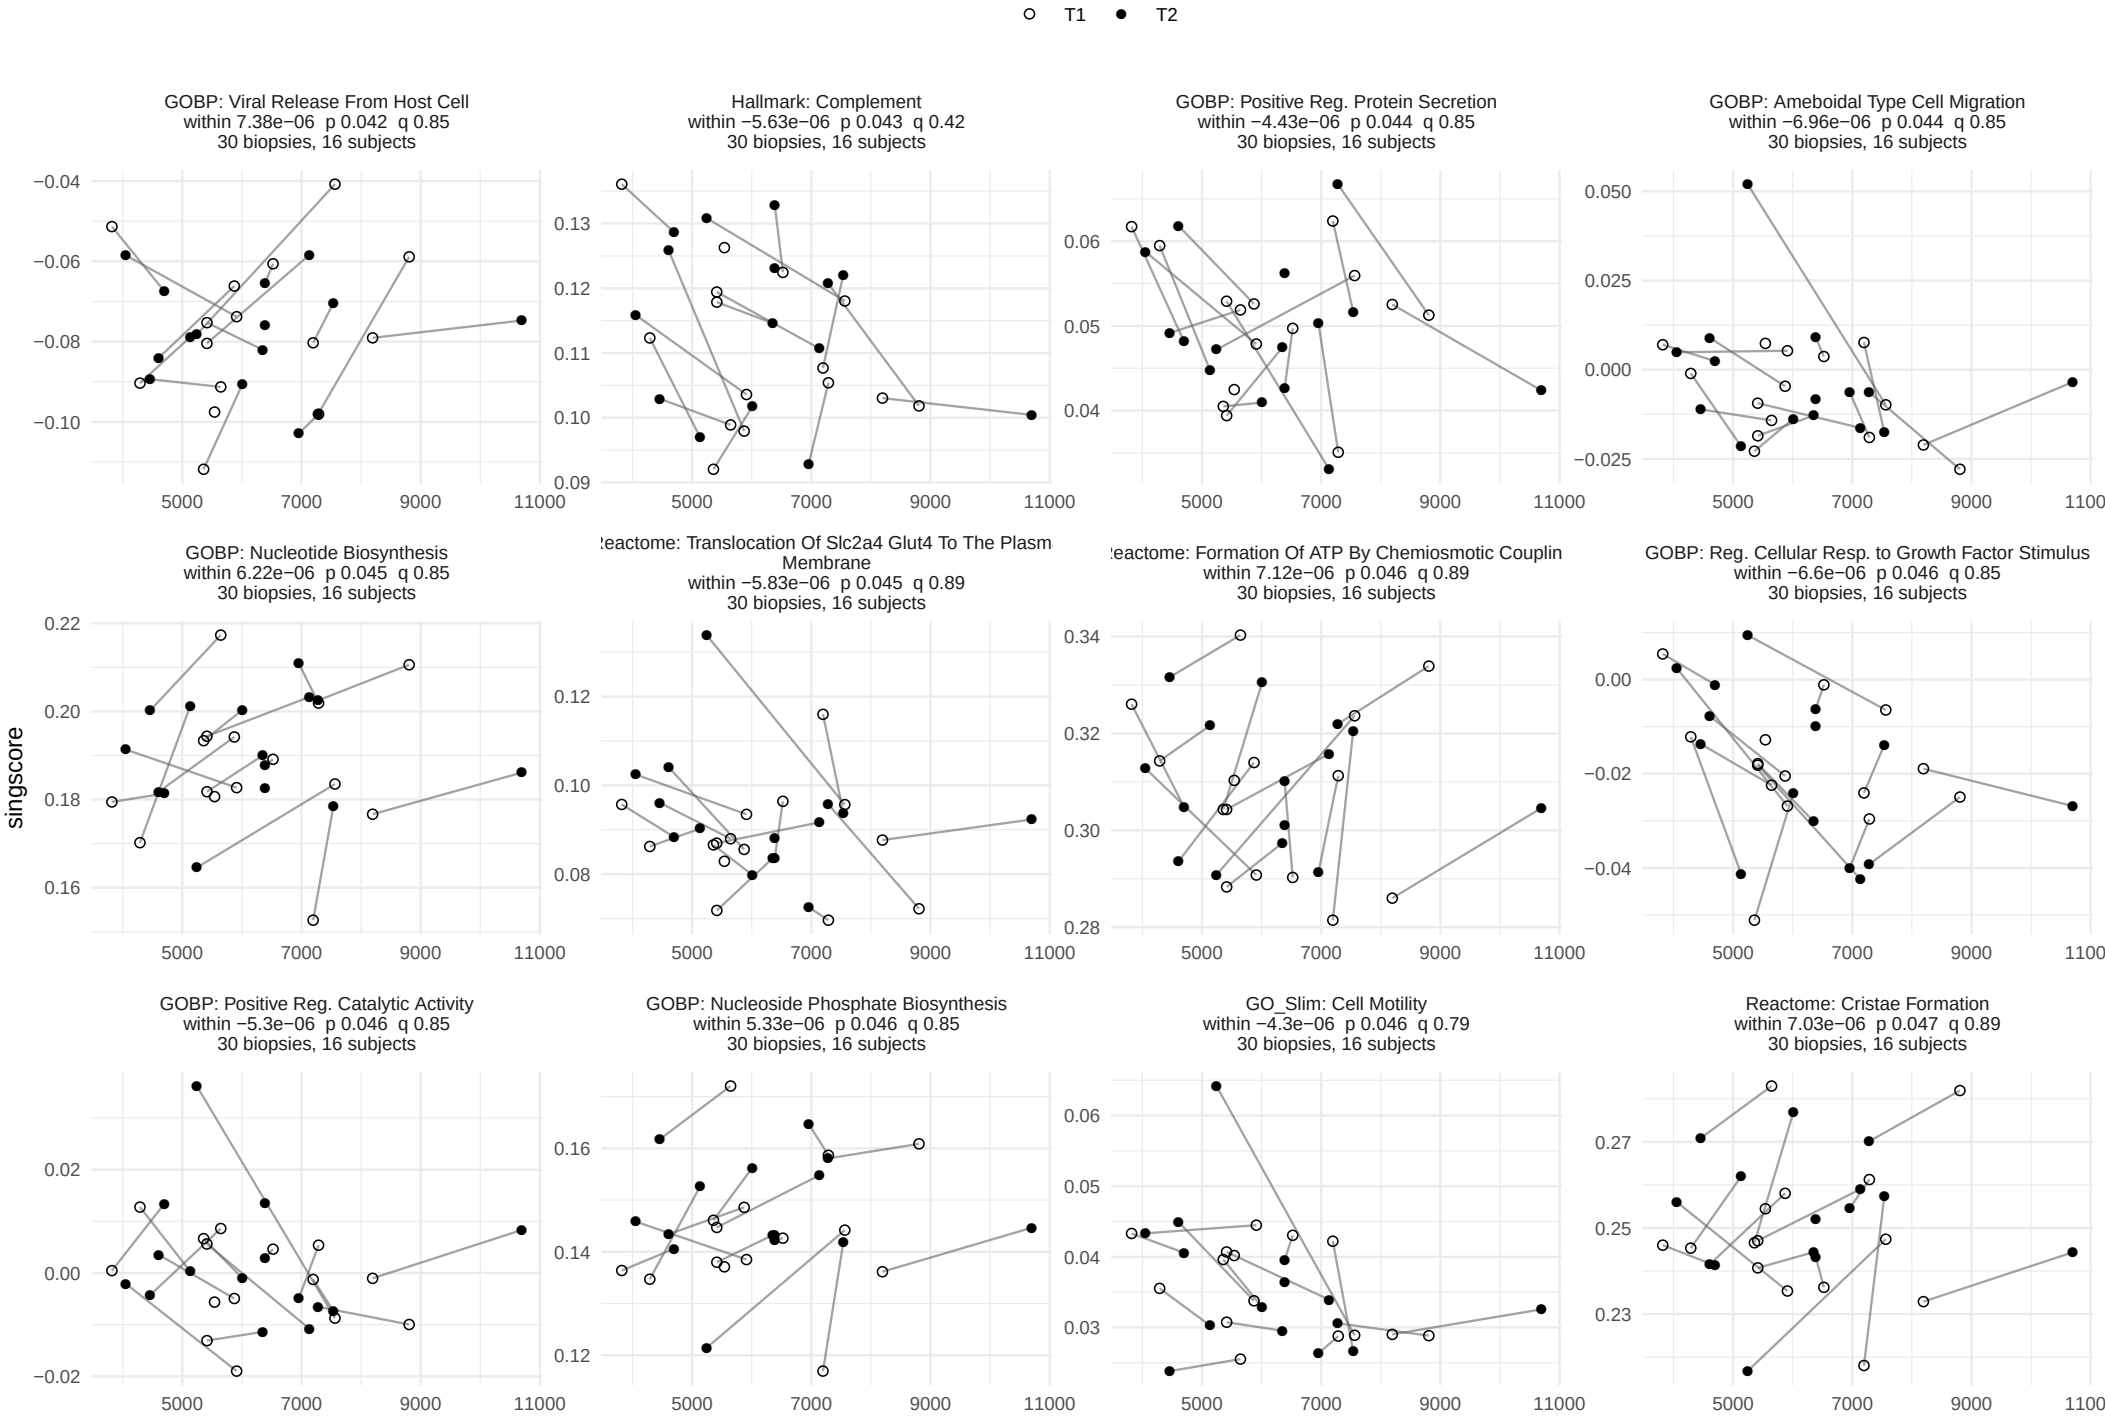

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/02_sets.xlsx, model.

fcsa_mixed, within−person term


64 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 6 of 6.

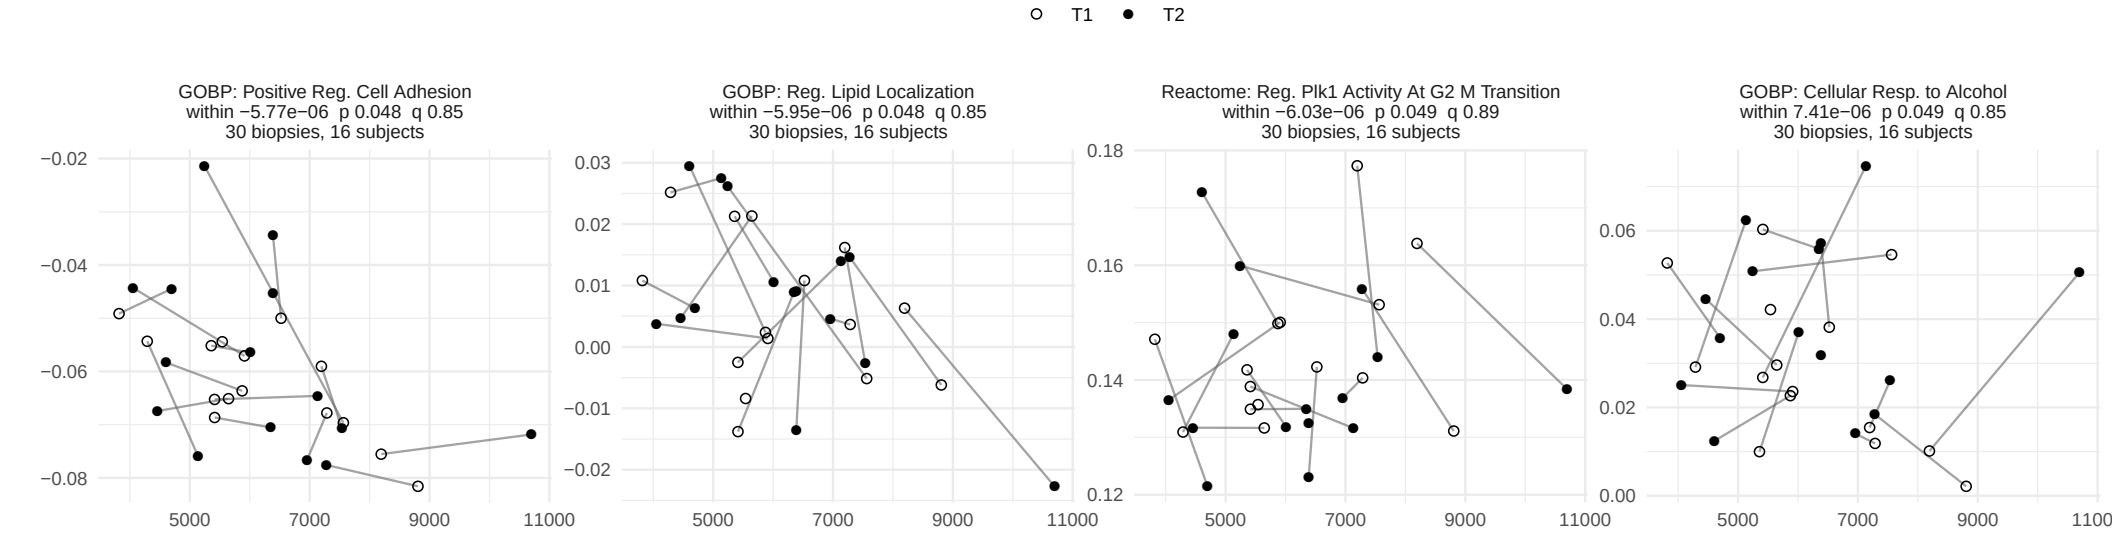

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/02_sets.xlsx, model.

fcsa_mixed, between−person term


69 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 1 of 6.

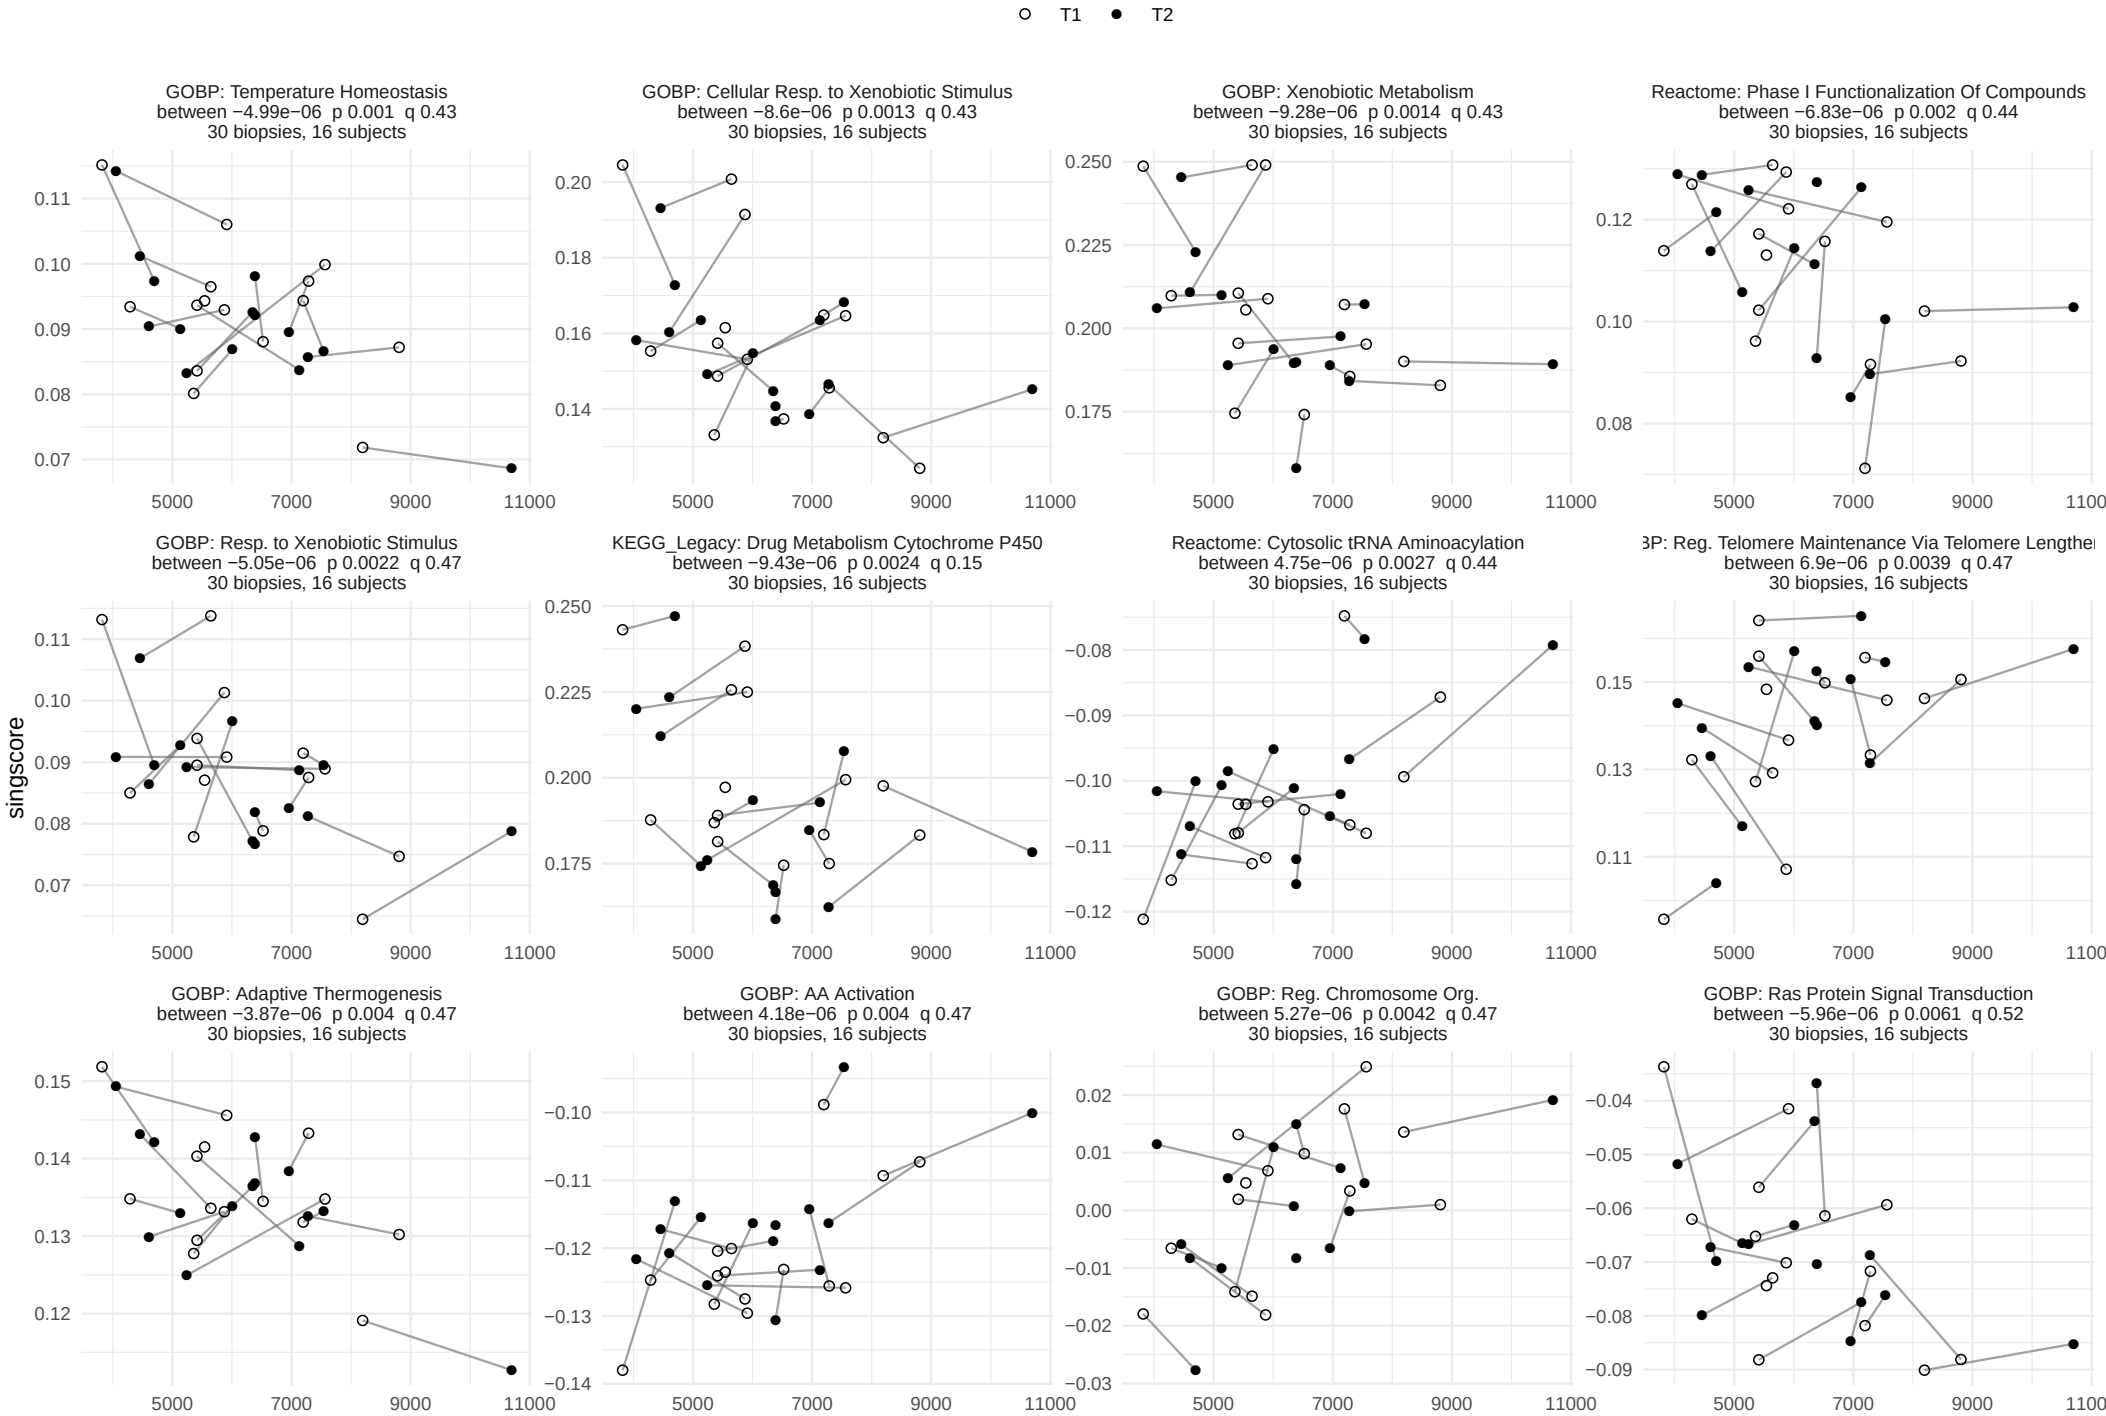

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/02_sets.xlsx, model.

fcsa_mixed, between−person term


69 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 2 of 6.

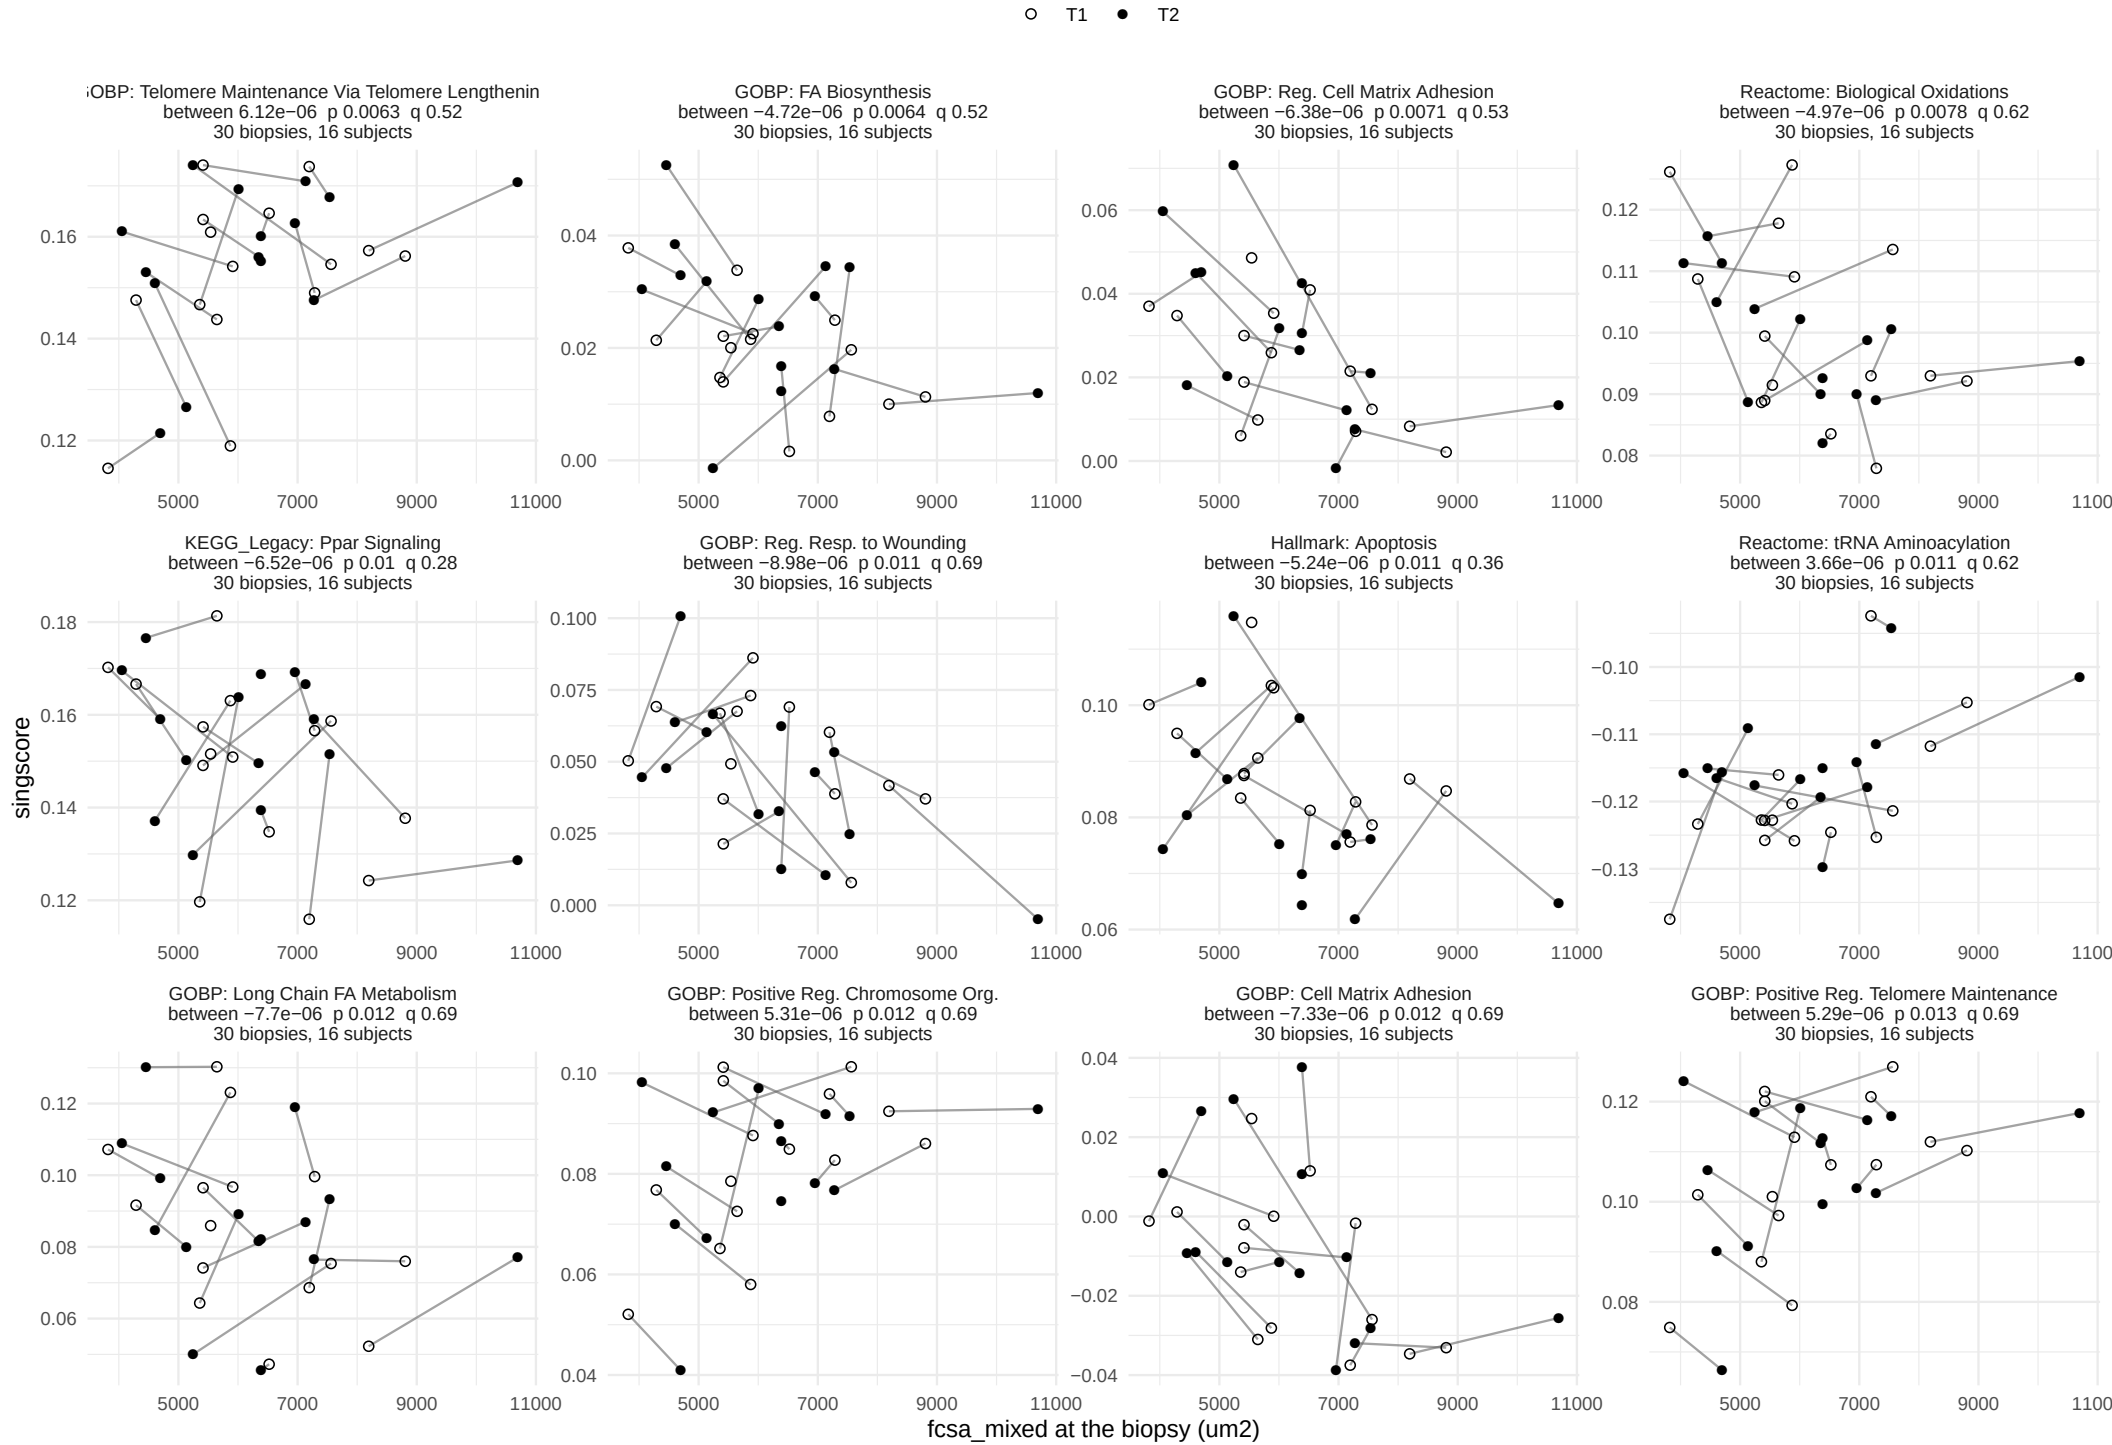

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/02_sets.xlsx, model.

fcsa_mixed, between−person term


69 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 3 of 6.

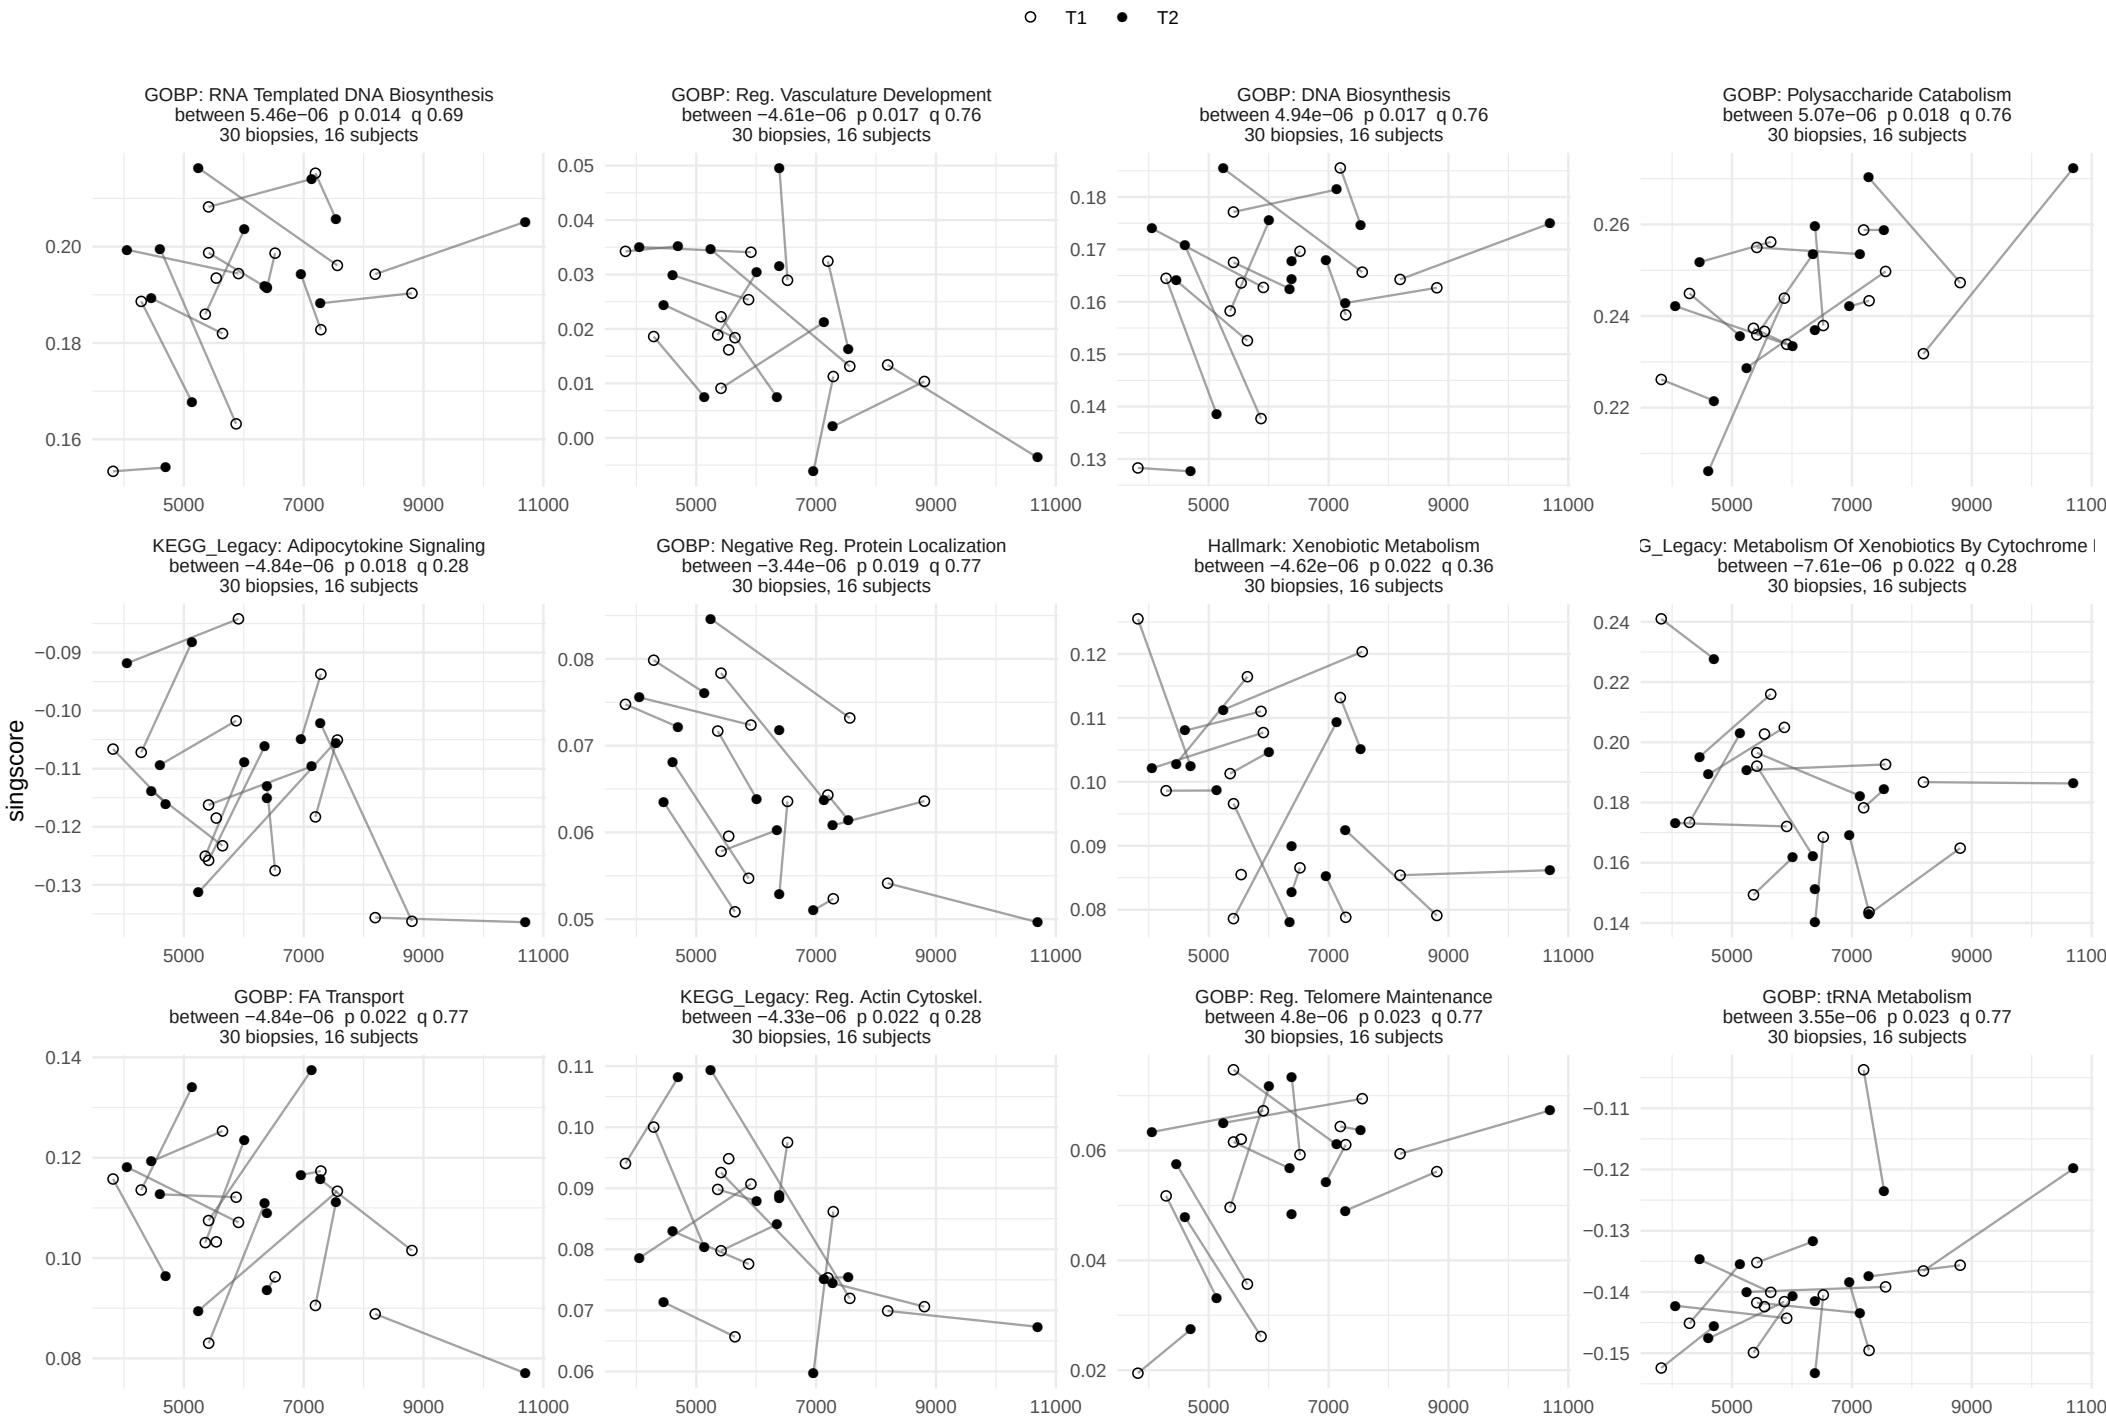

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/02_sets.xlsx, model.

fcsa_mixed, between−person term


69 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 4 of 6.

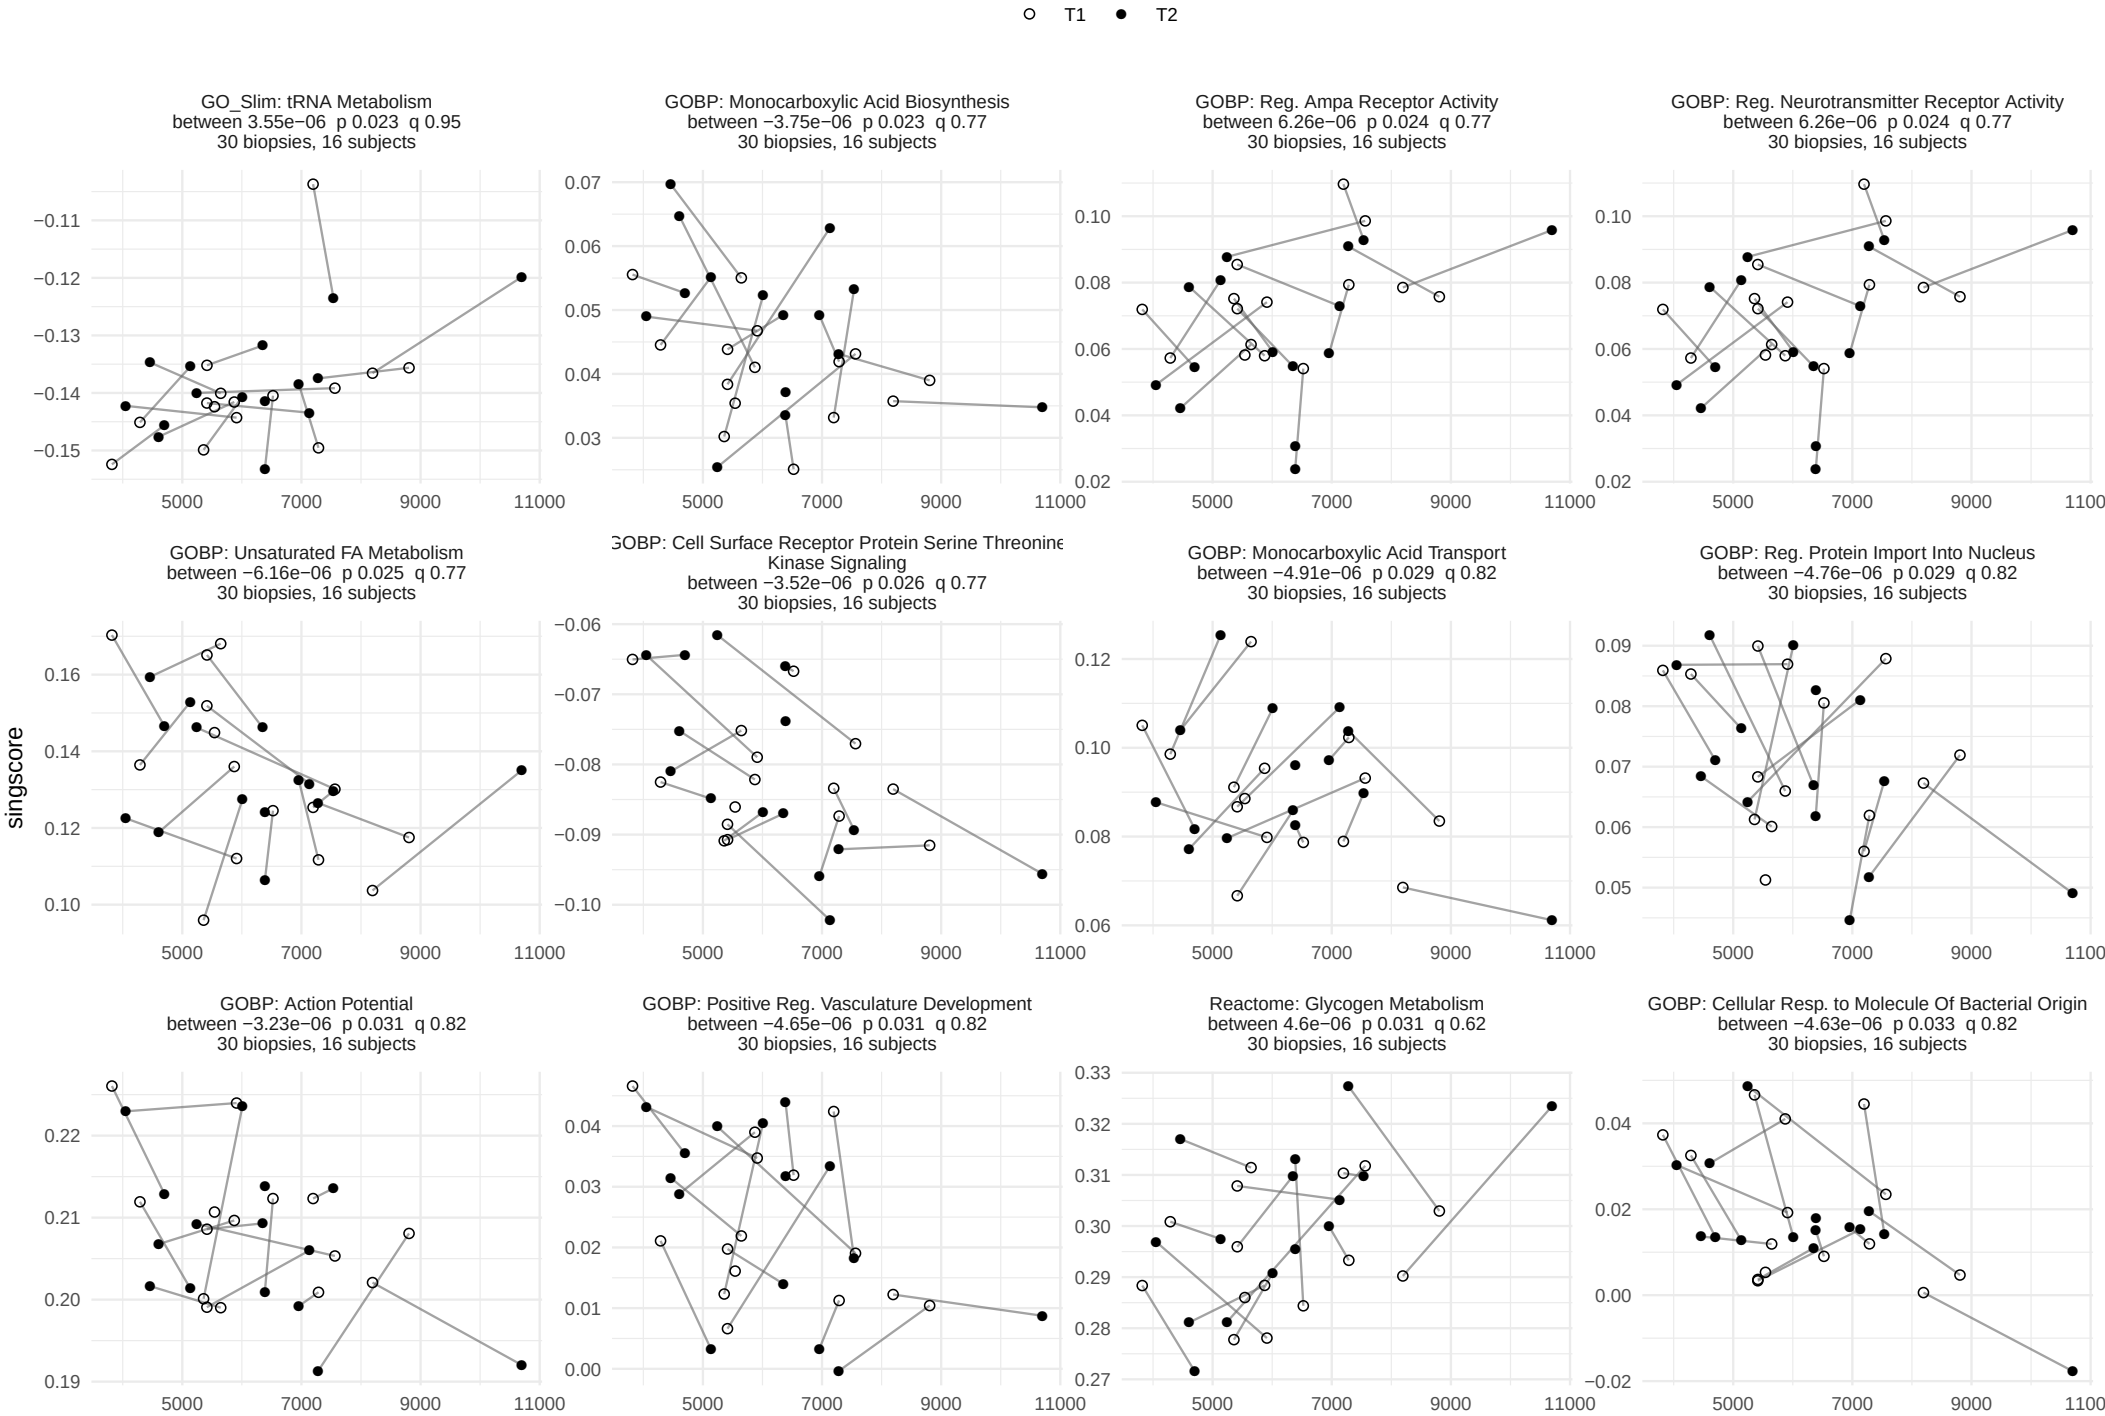

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/02_sets.xlsx, model.

fcsa_mixed, between−person term


69 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 5 of 6.

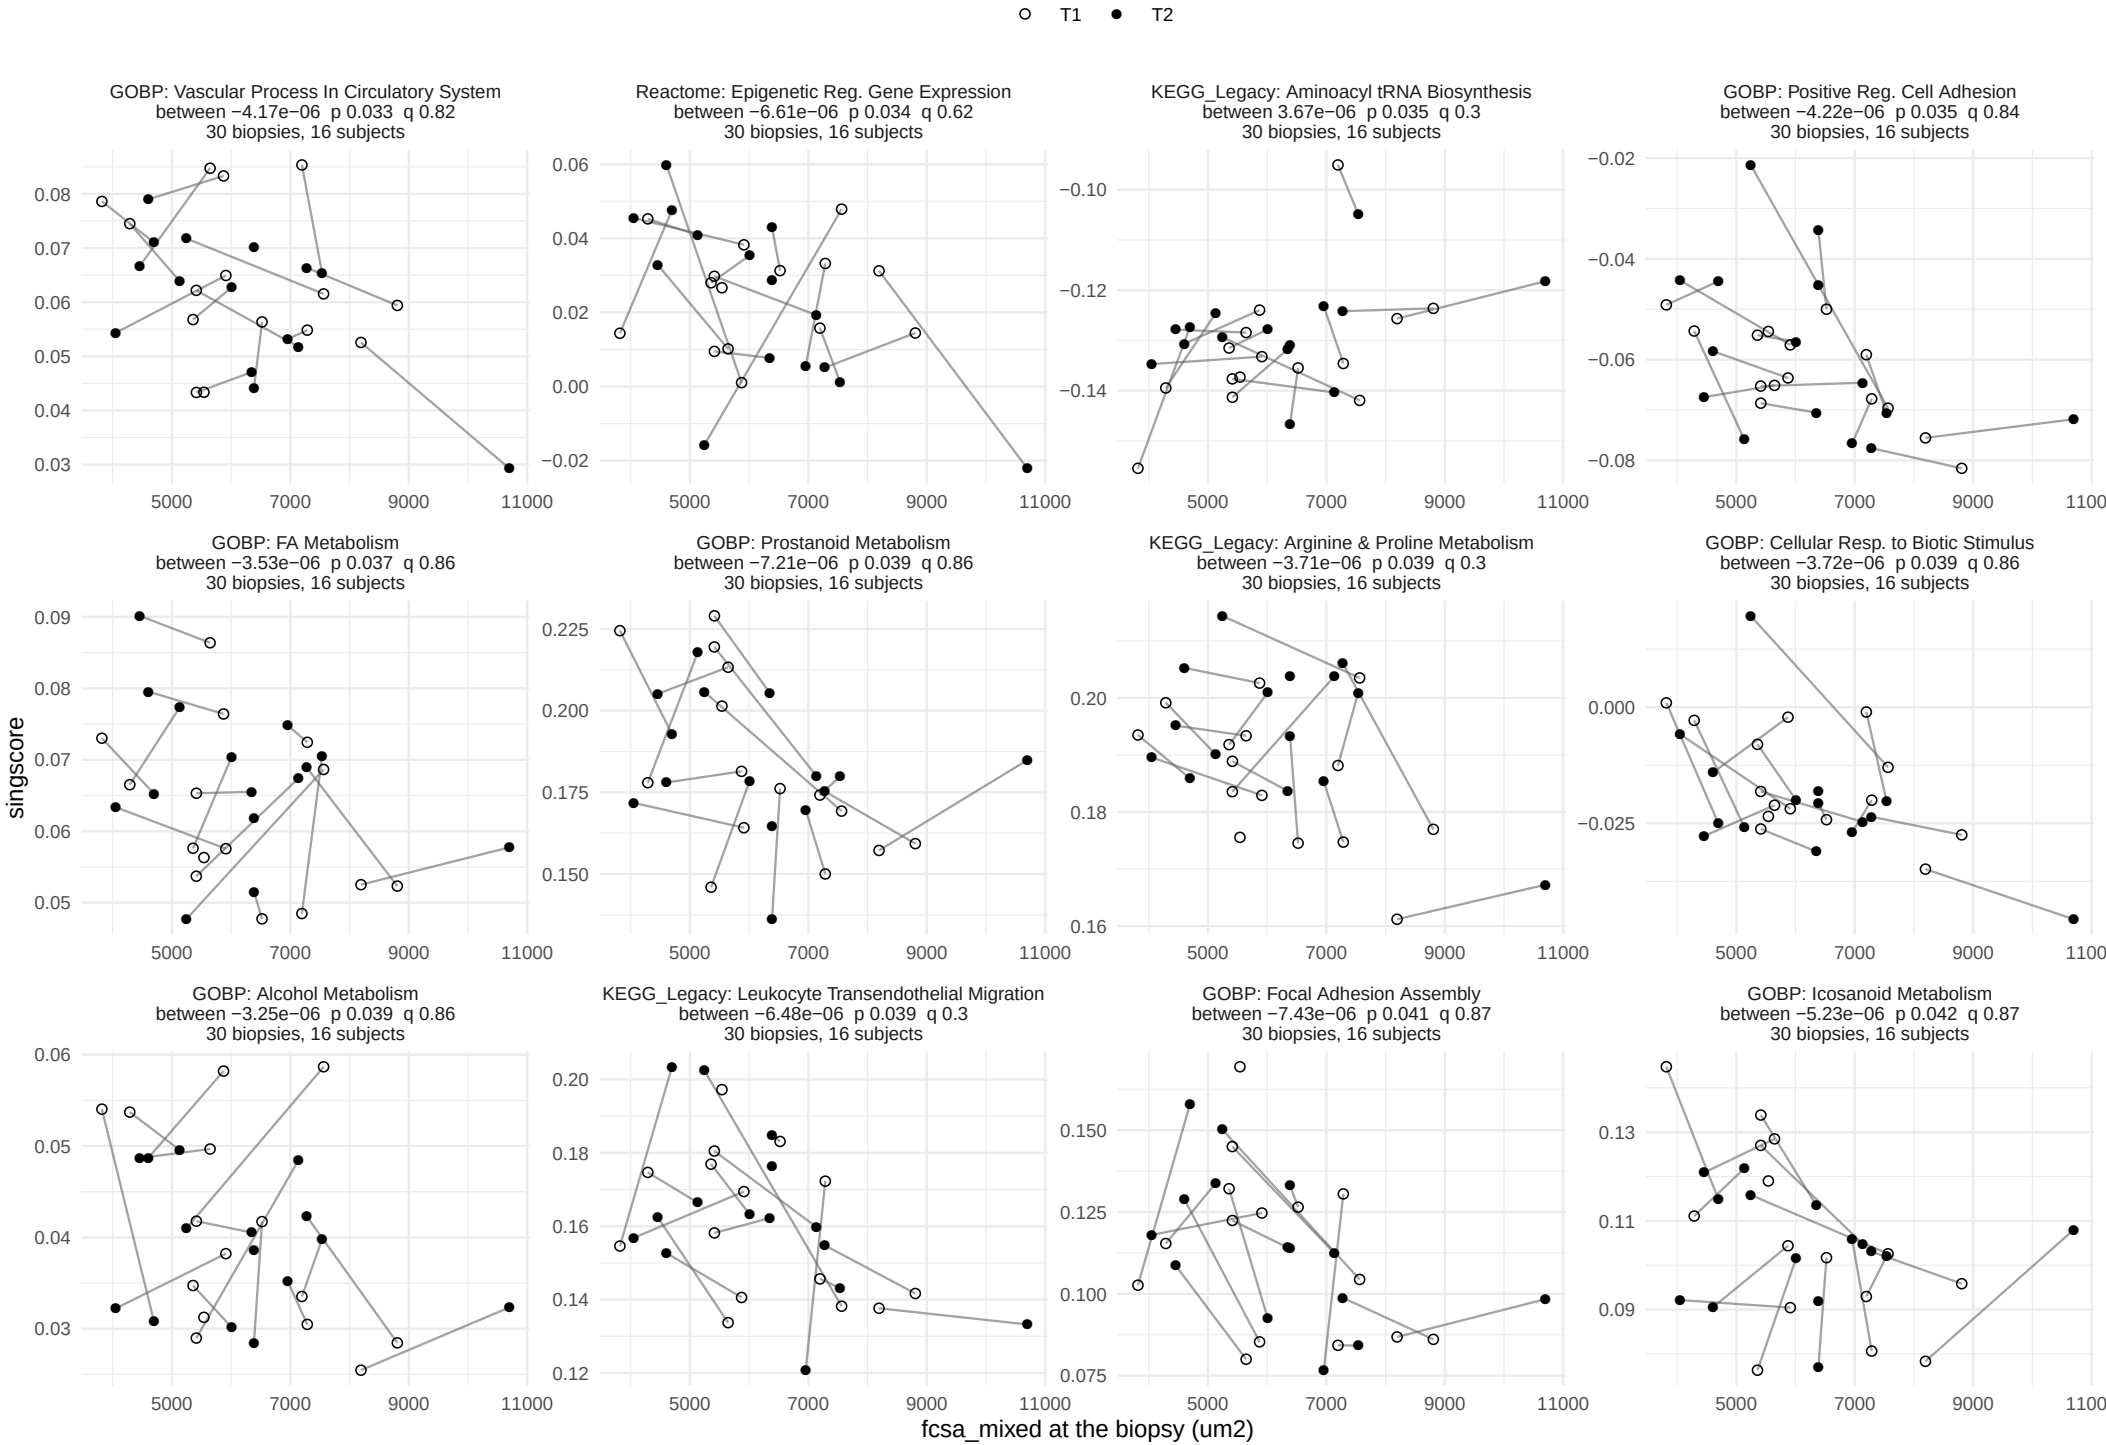

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/02_sets.xlsx, model.

fcsa_mixed, between−person term


69 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 6 of 6.

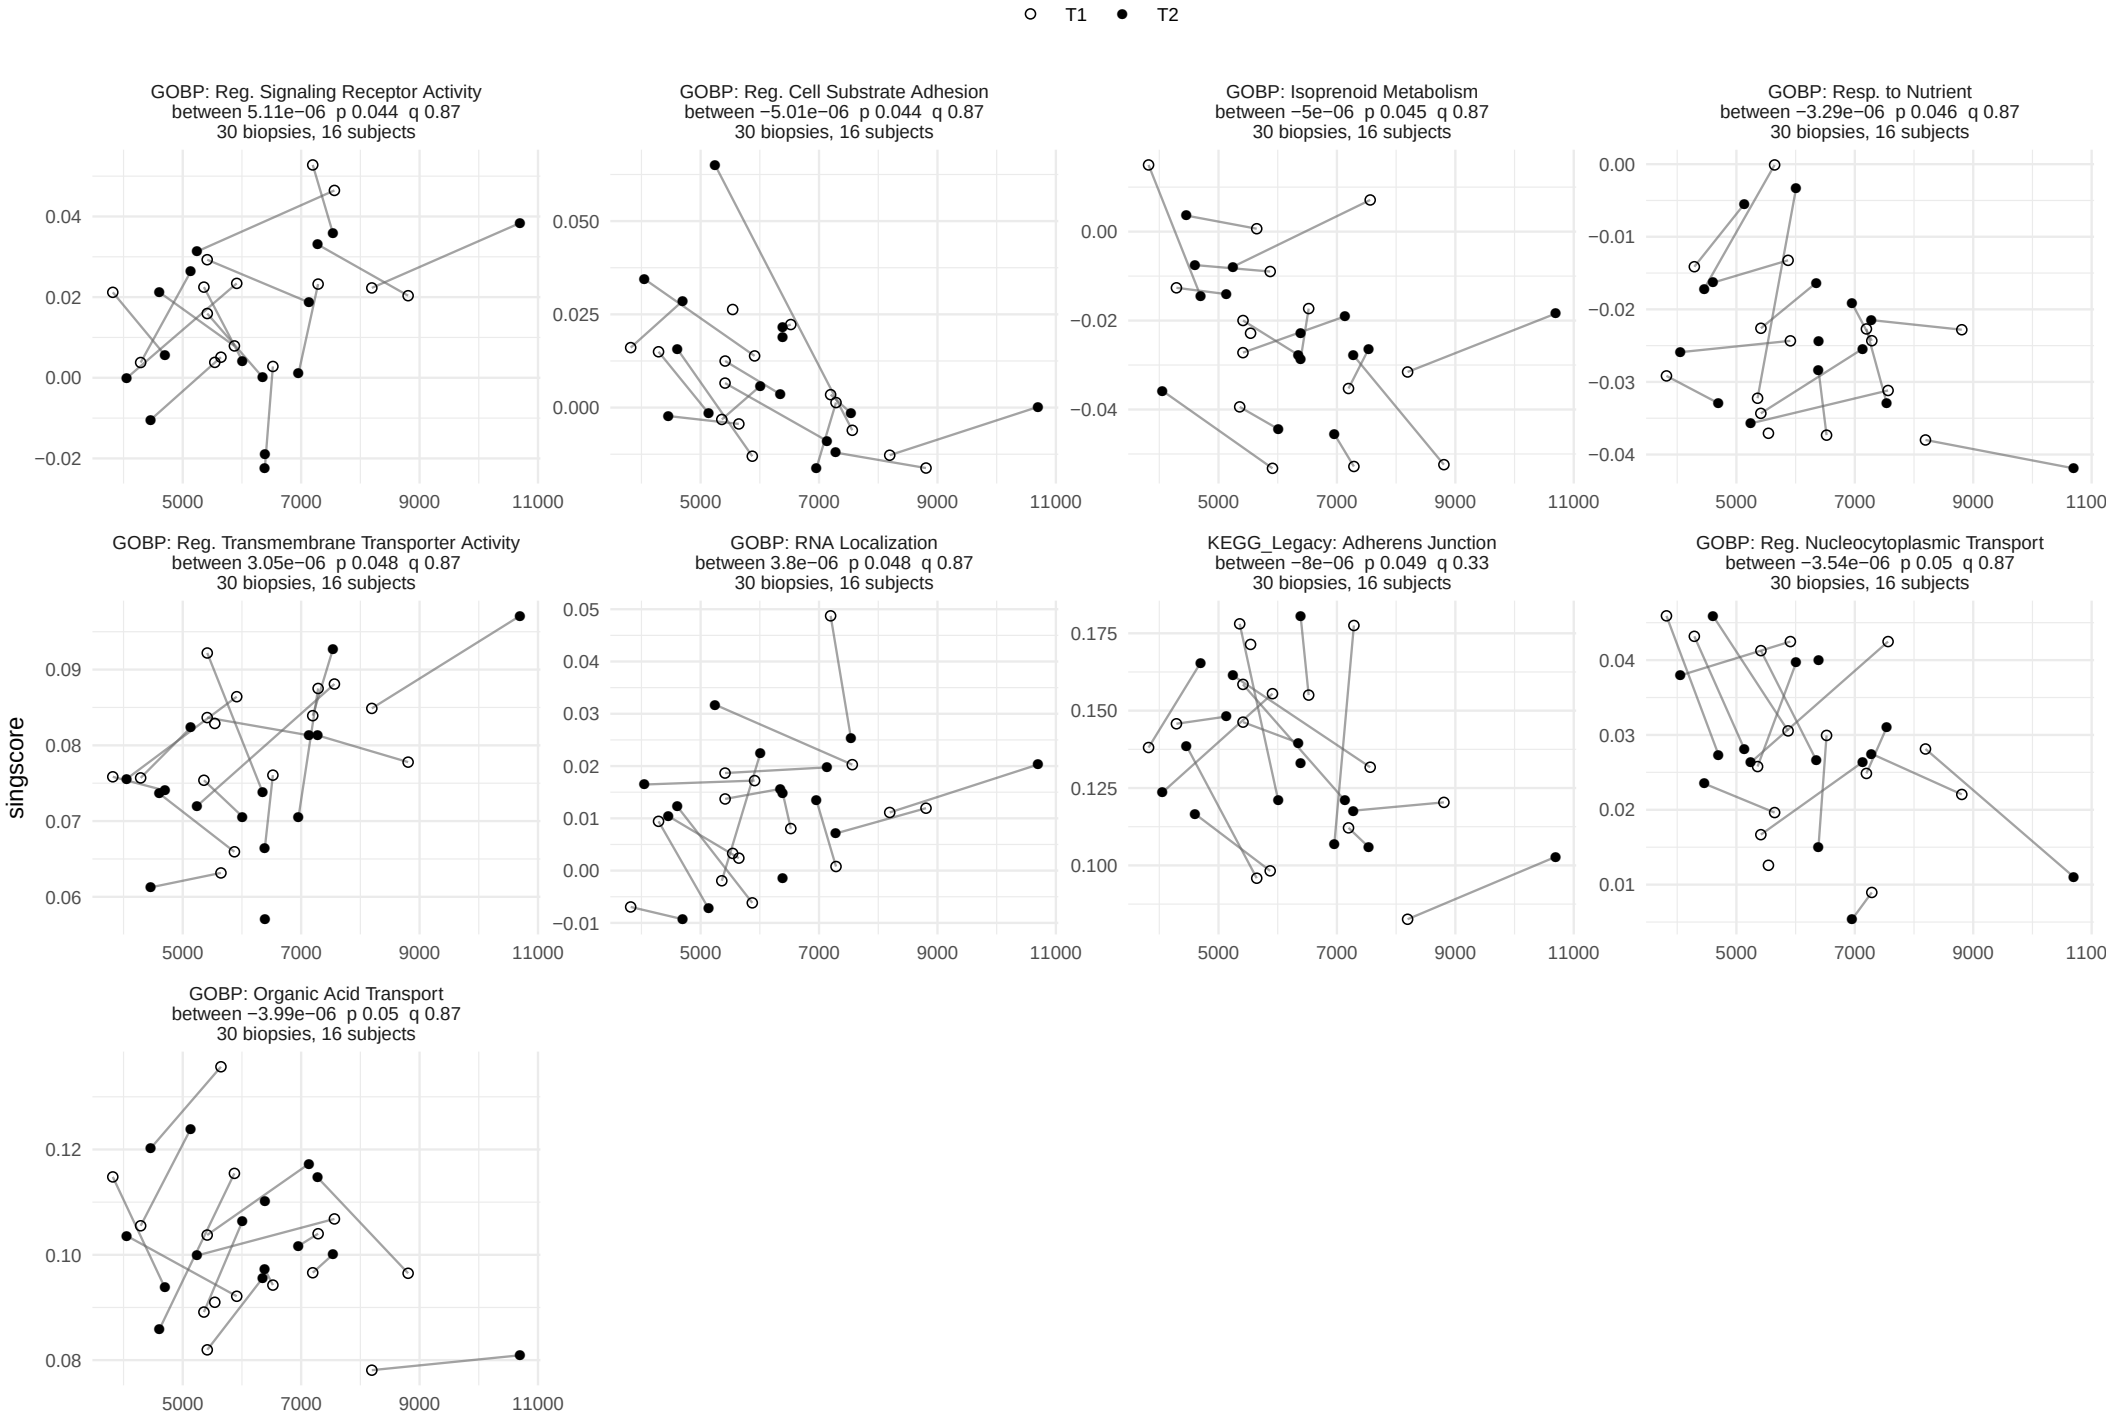

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/02_sets.xlsx, model.

fcsa_type1, within−person term


64 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 1 of 6.

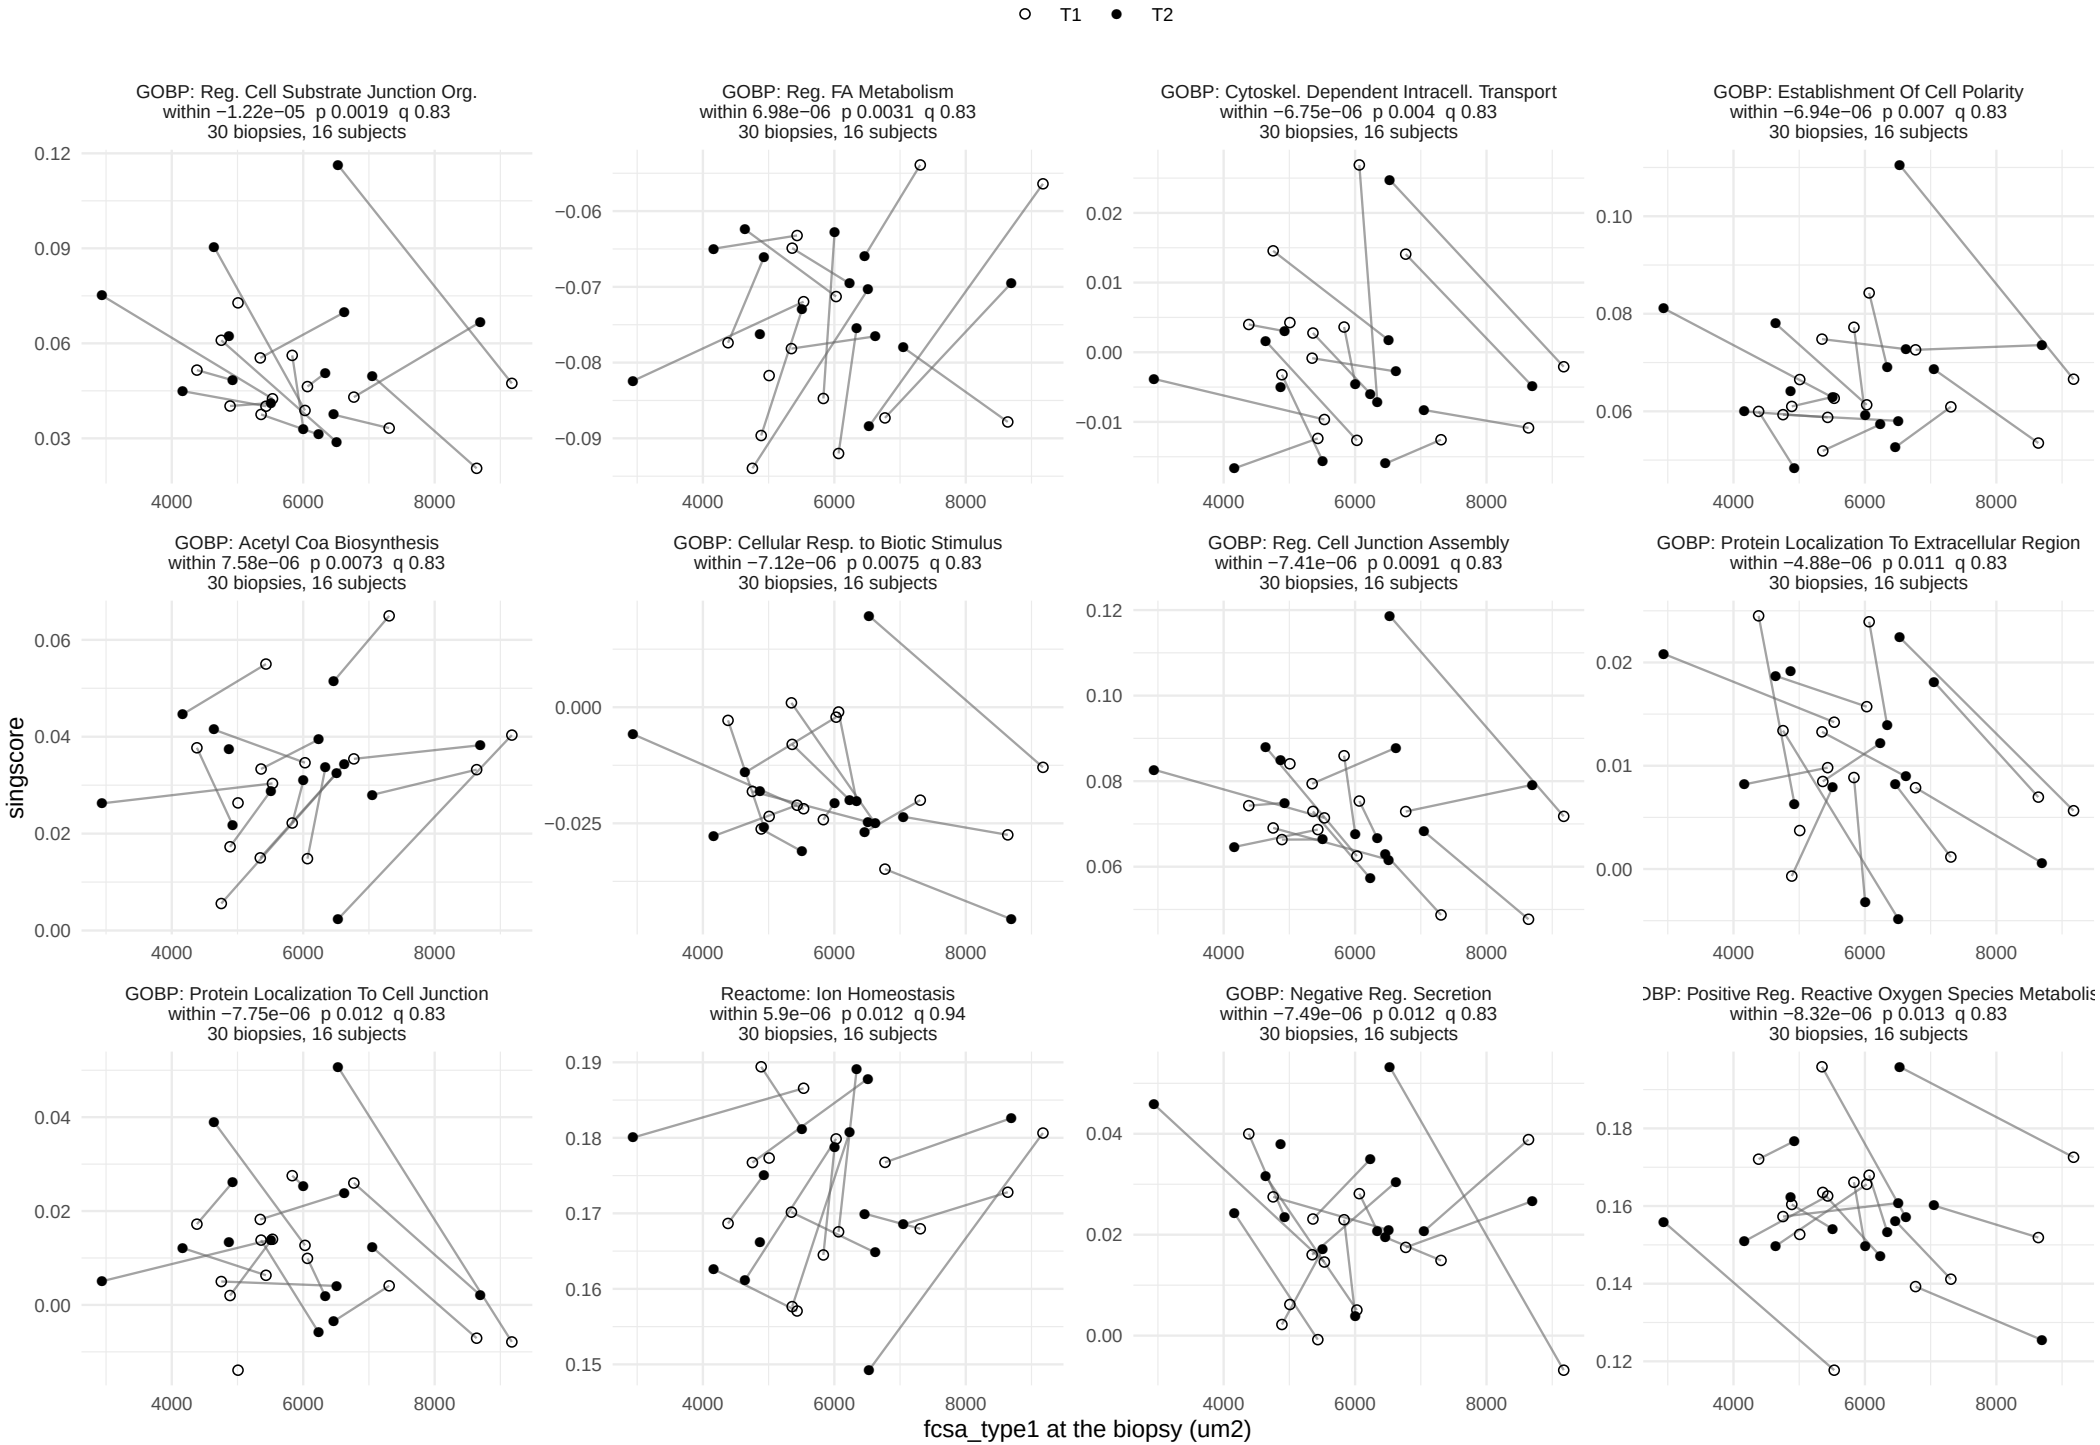

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/02_sets.xlsx, model.

fcsa_type1, within−person term


64 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 2 of 6.

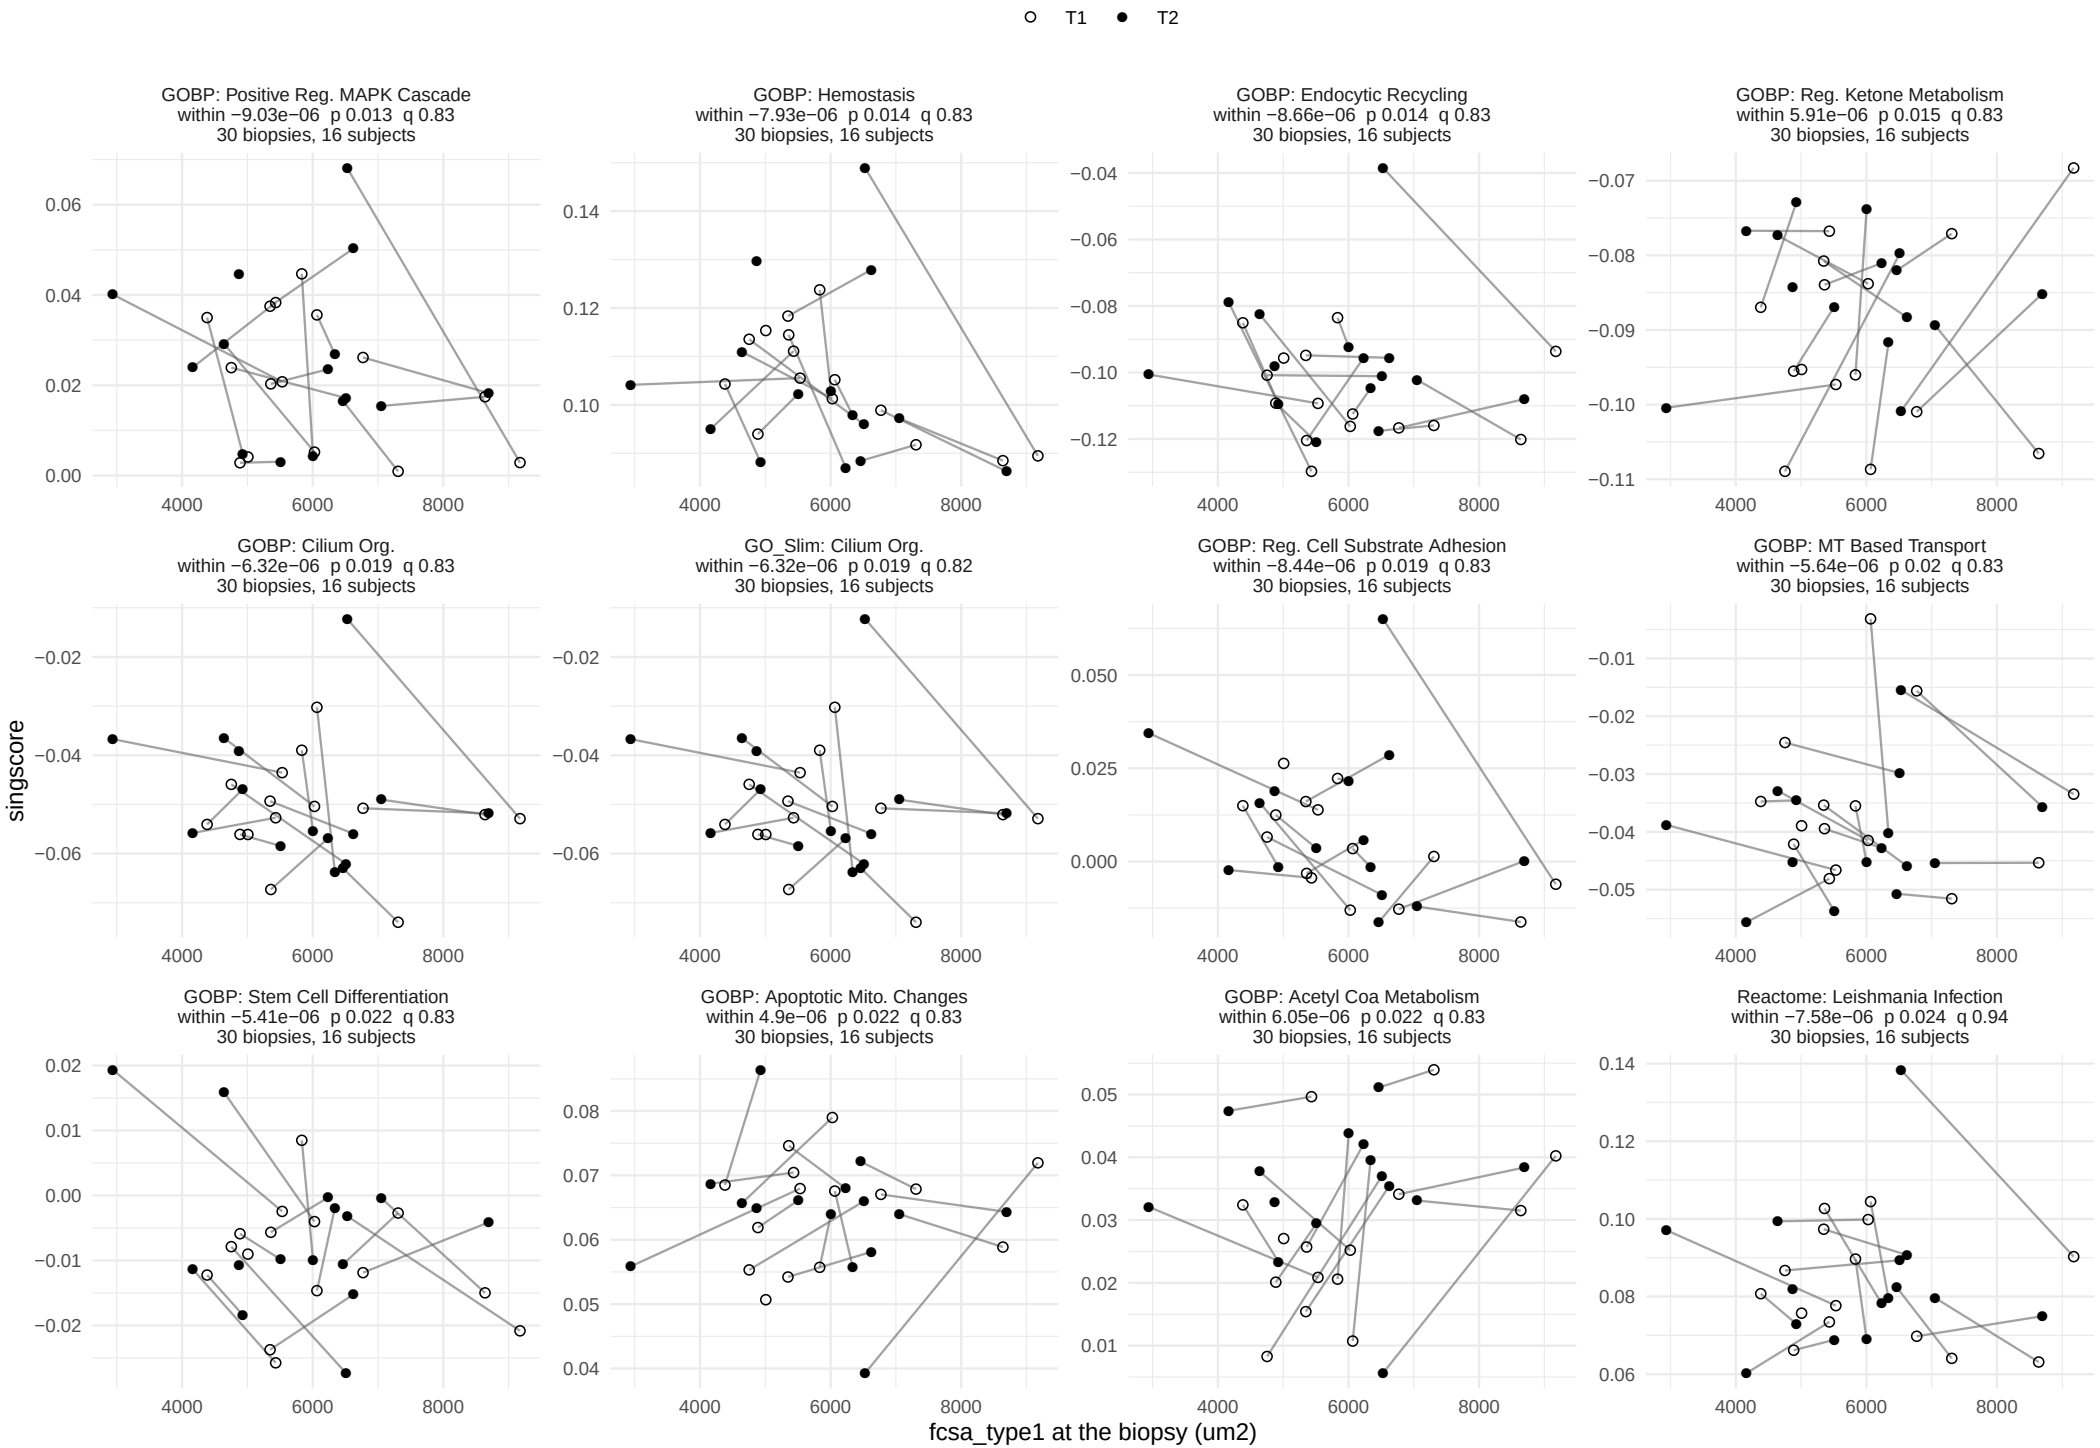

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/02_sets.xlsx, model.

fcsa_type1, within−person term


64 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 3 of 6.

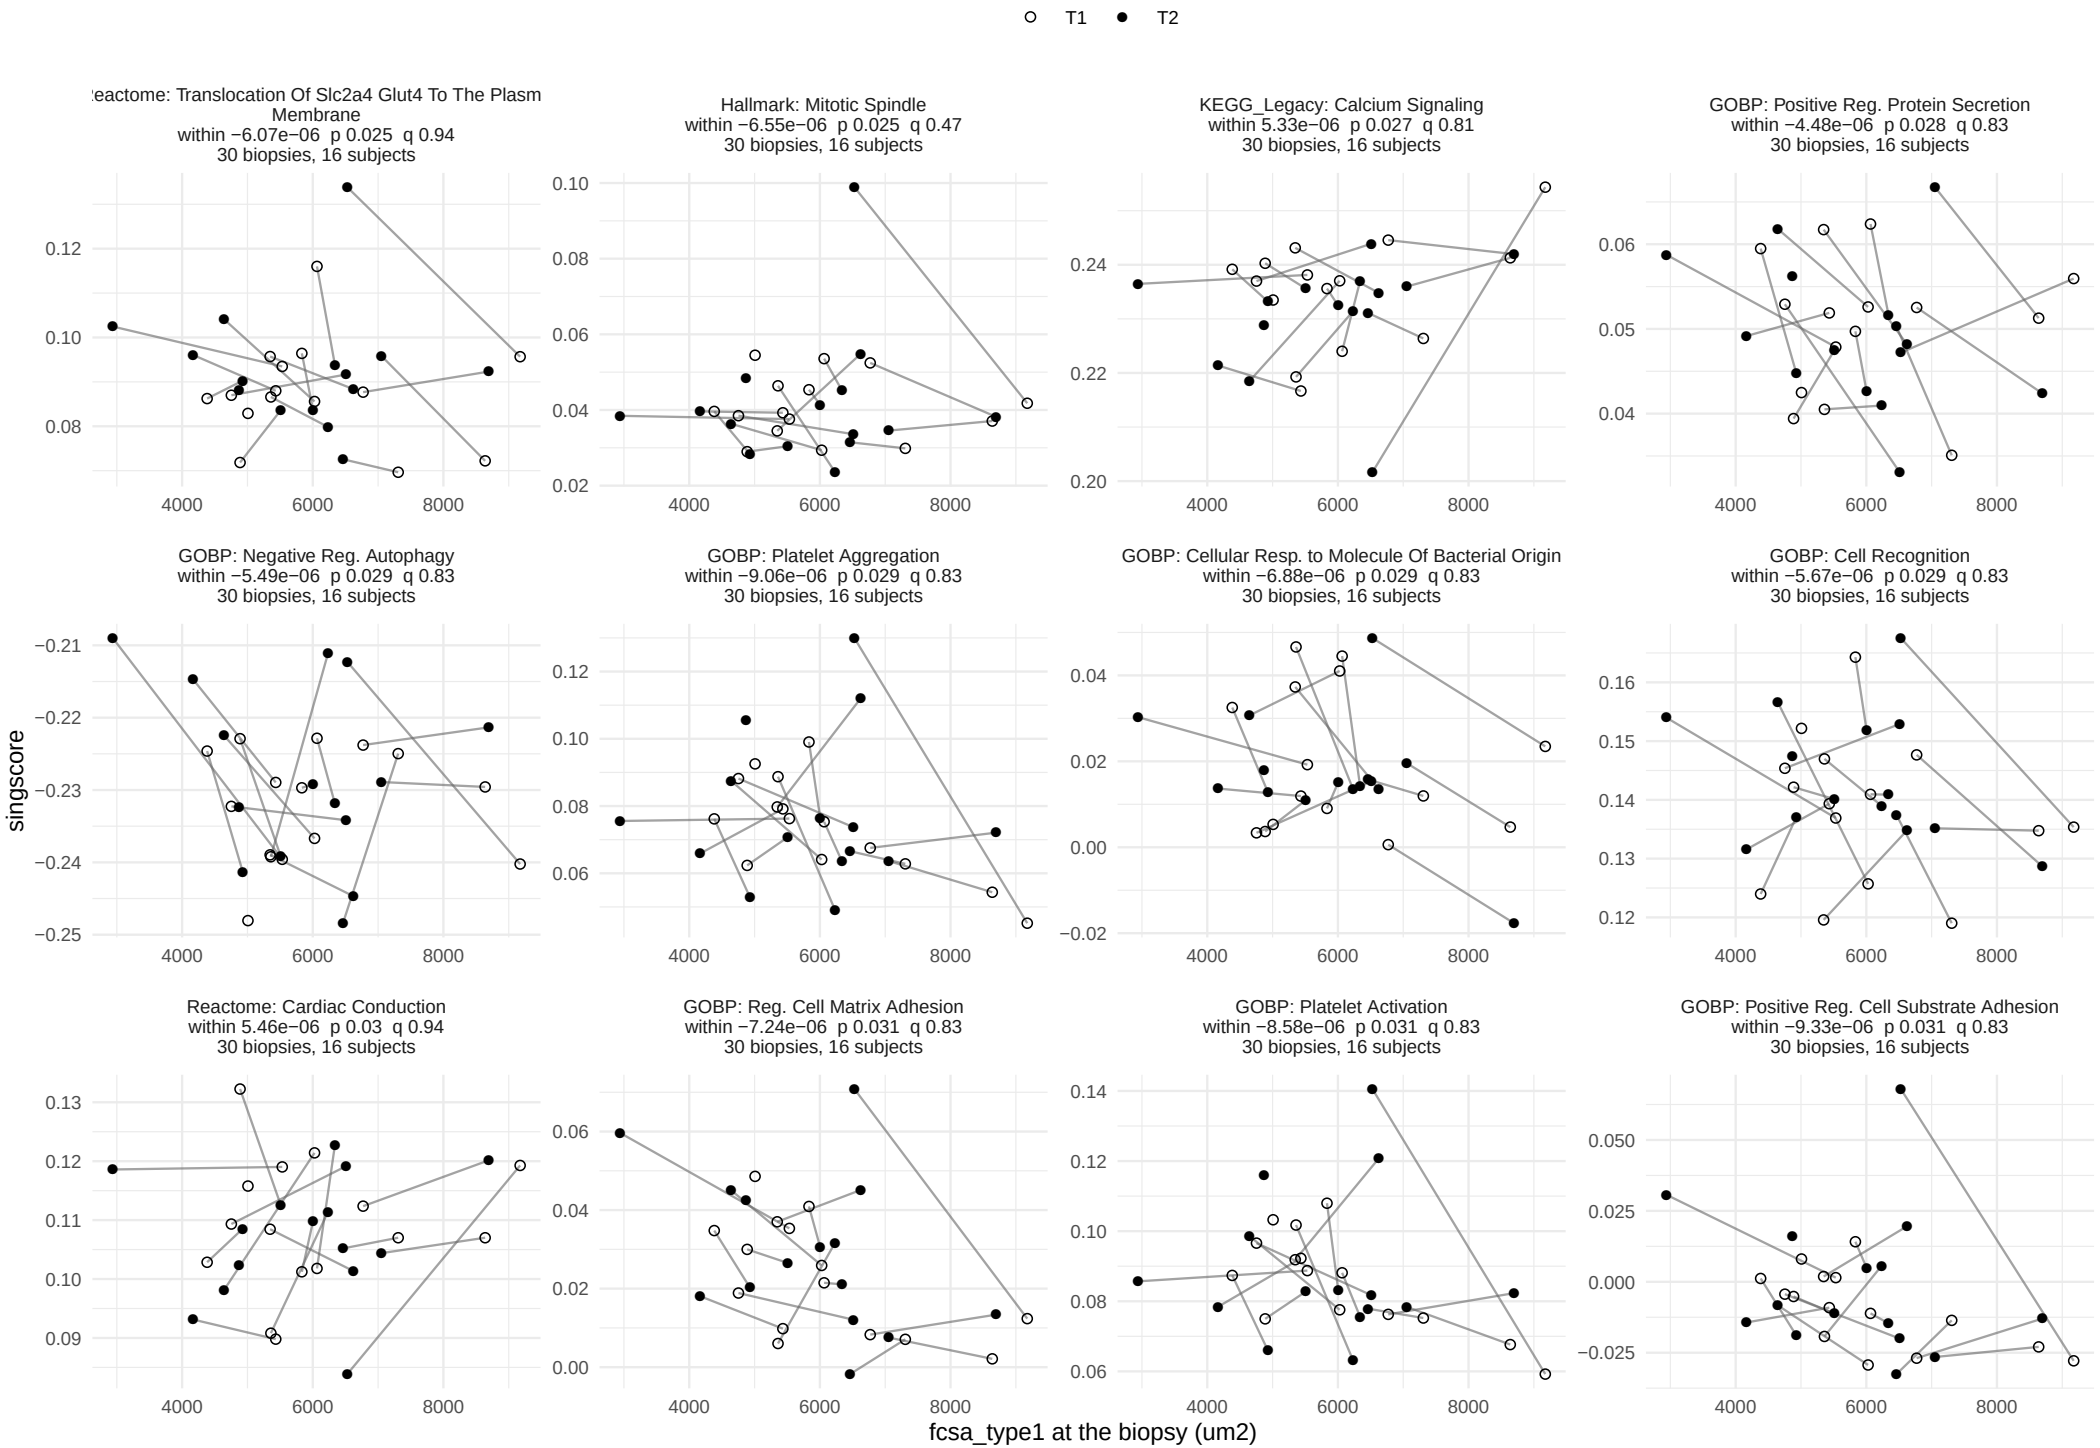

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/02_sets.xlsx, model.

fcsa_type1, within−person term


64 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 4 of 6.

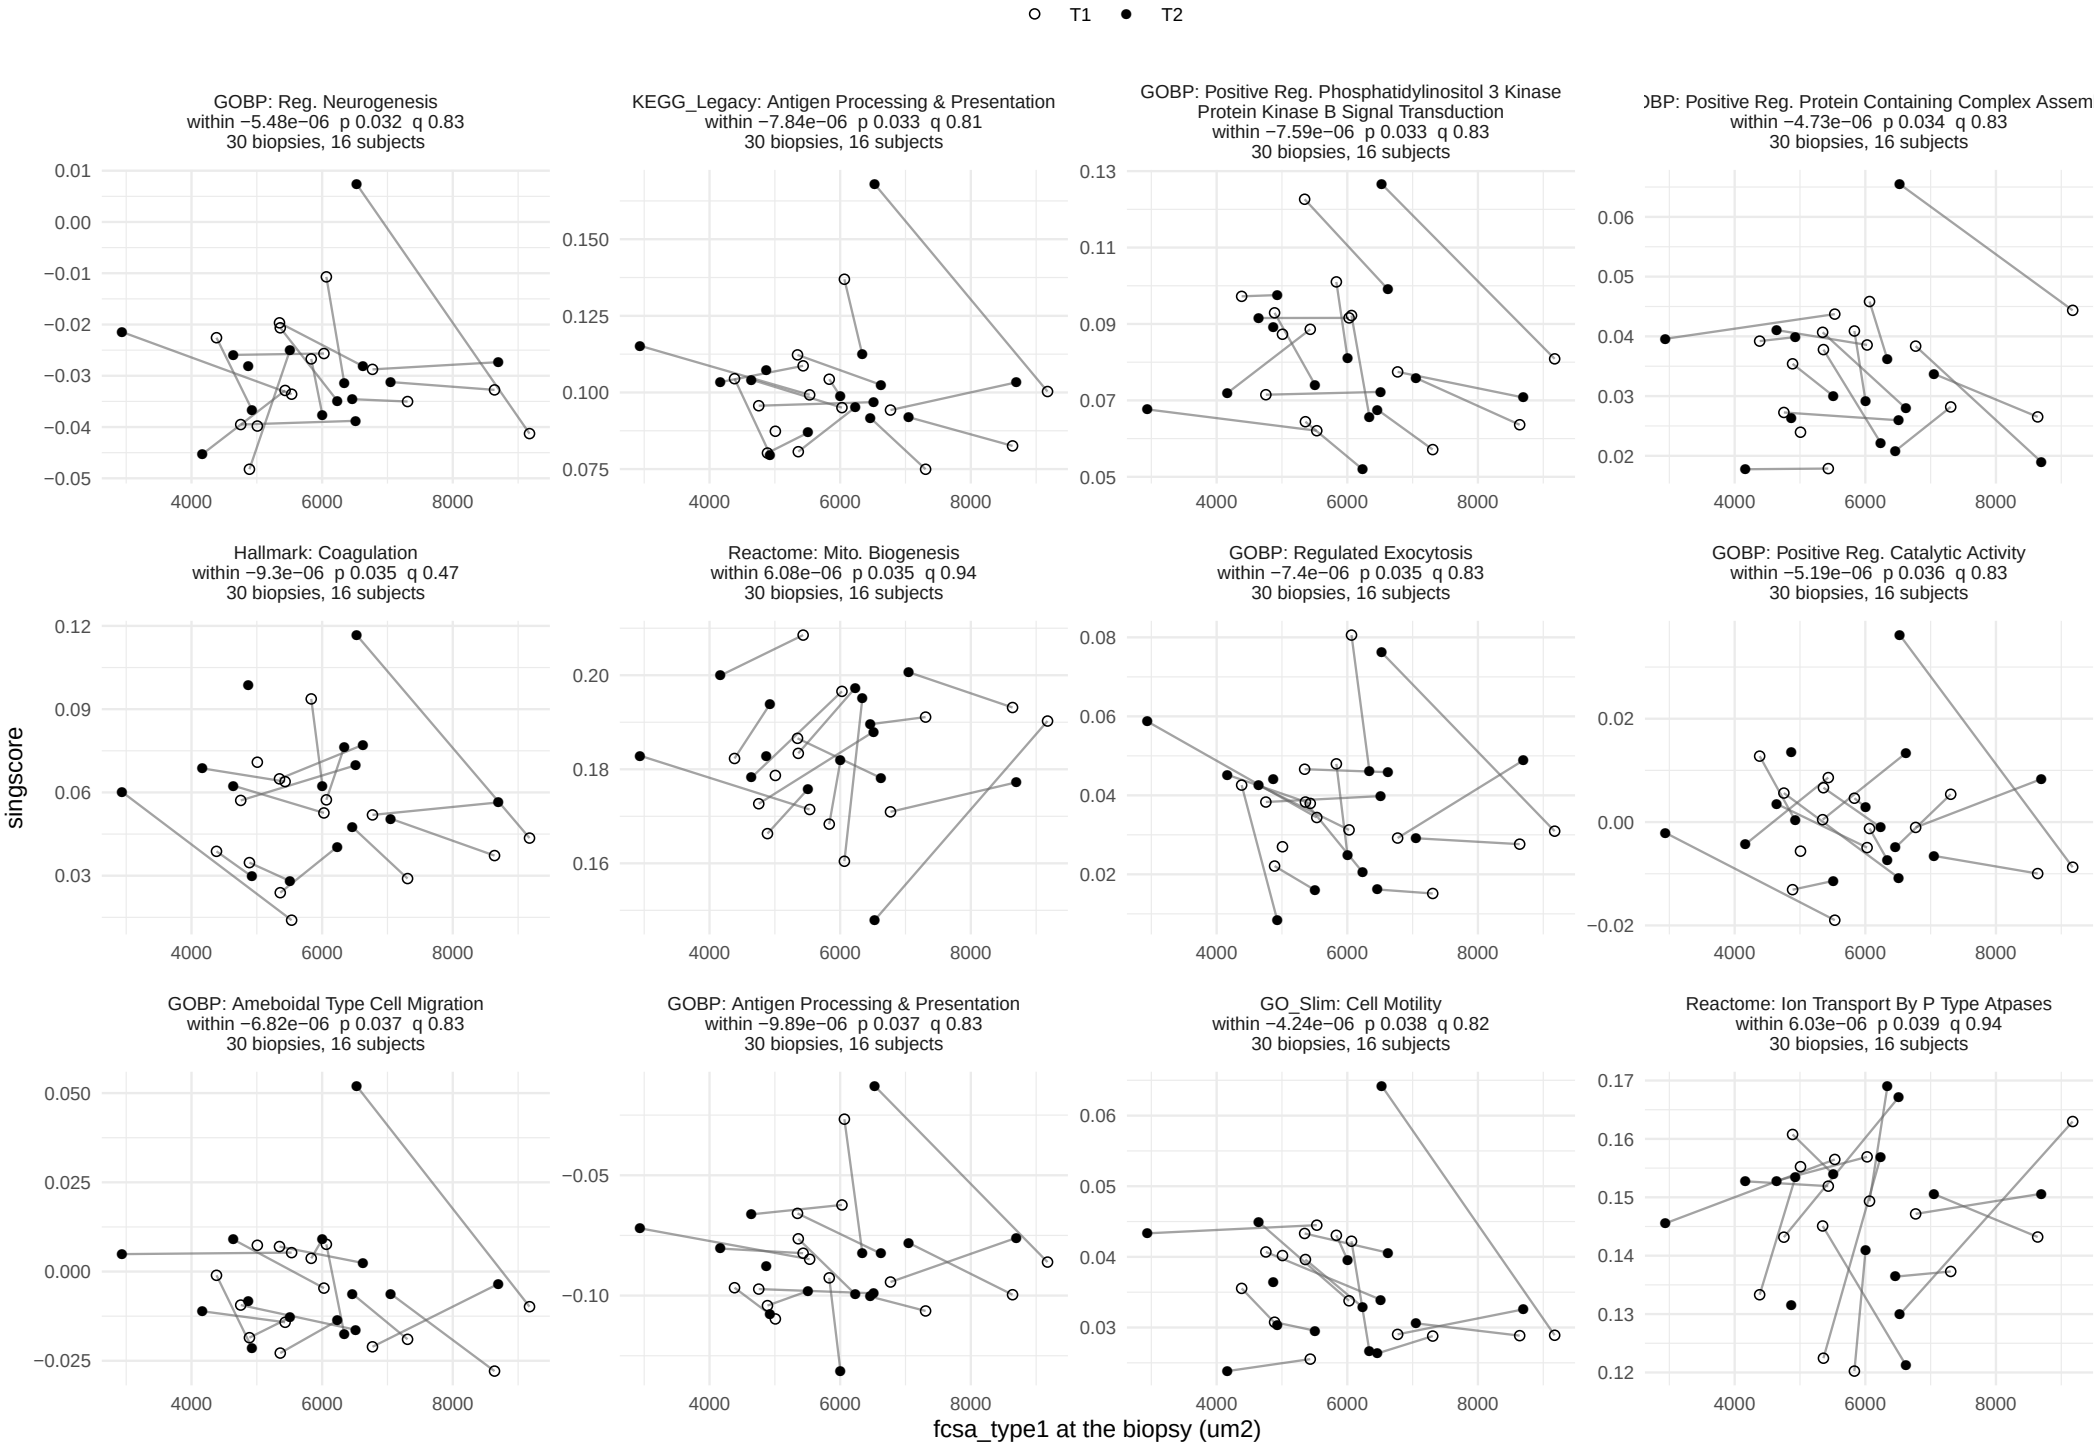

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/02_sets.xlsx, model.

fcsa_type1, within−person term


64 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 5 of 6.

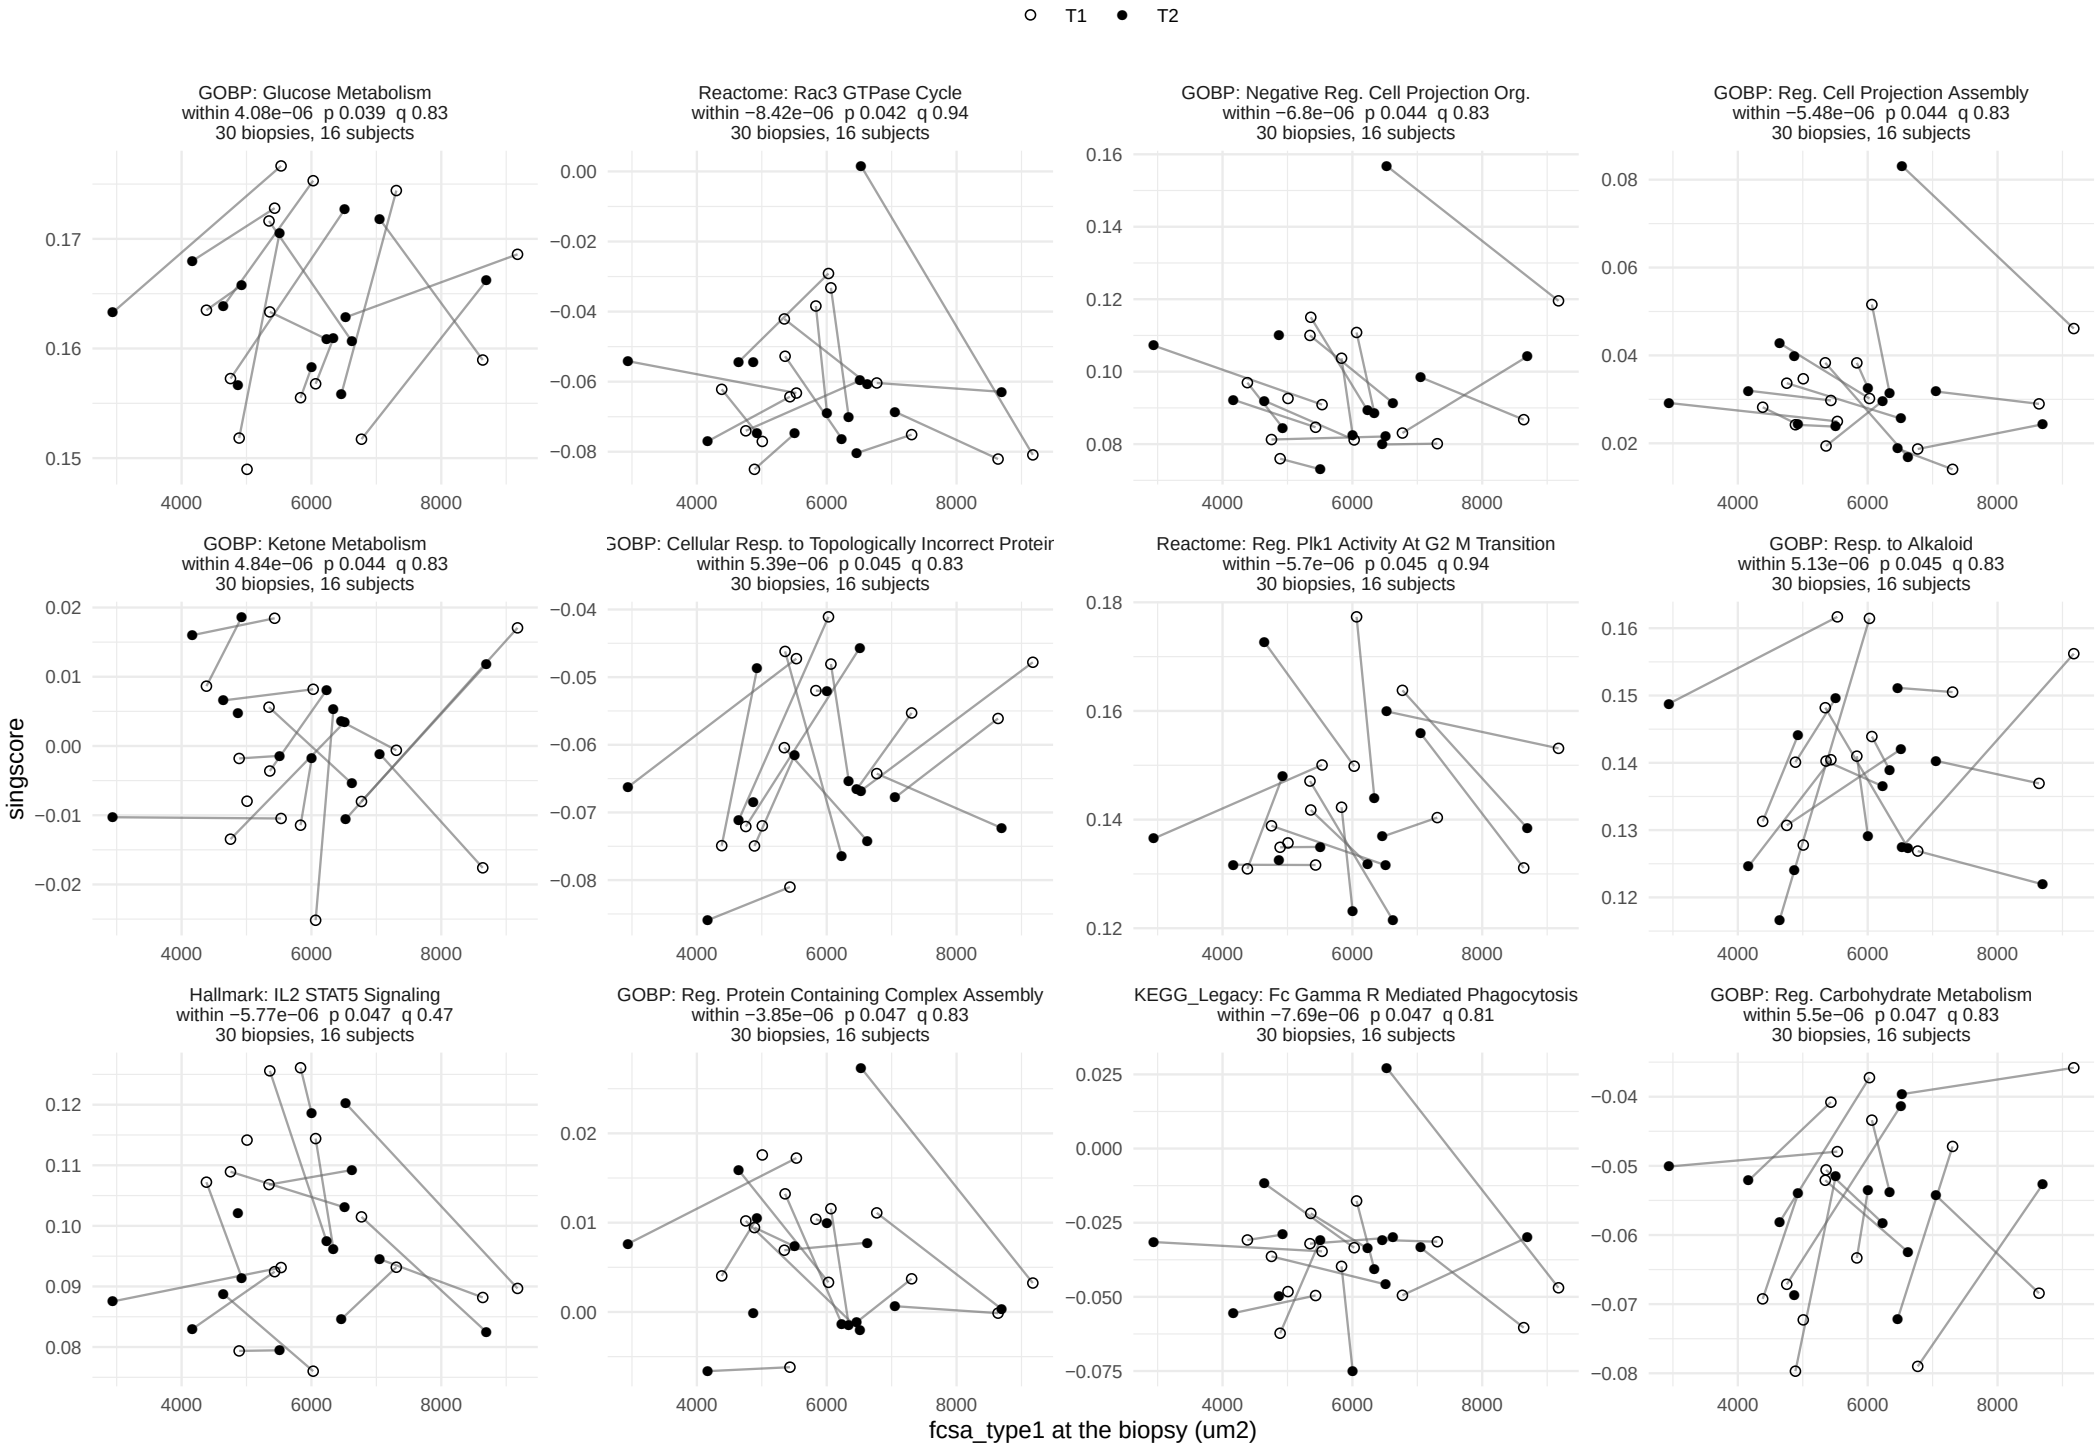

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/02_sets.xlsx, model.

fcsa_type1, within−person term


64 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 6 of 6.

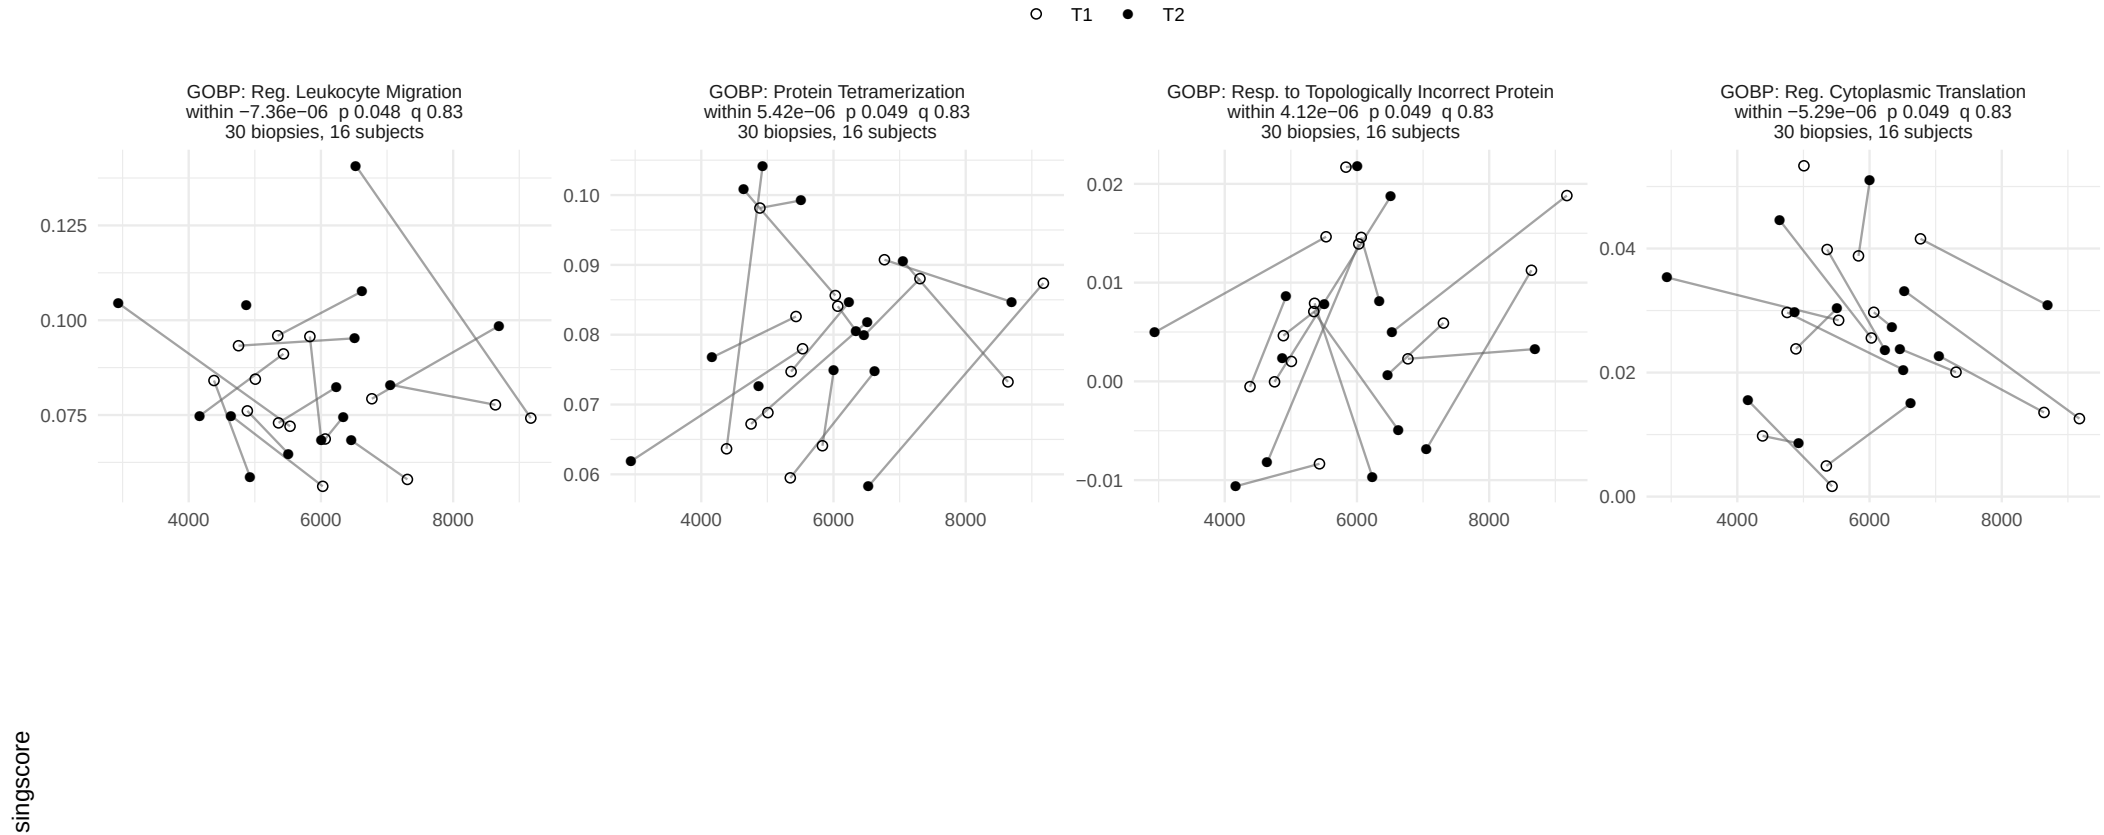

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/02_sets.xlsx, model.

fcsa_type1, between−person term


112 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 1 of 10.

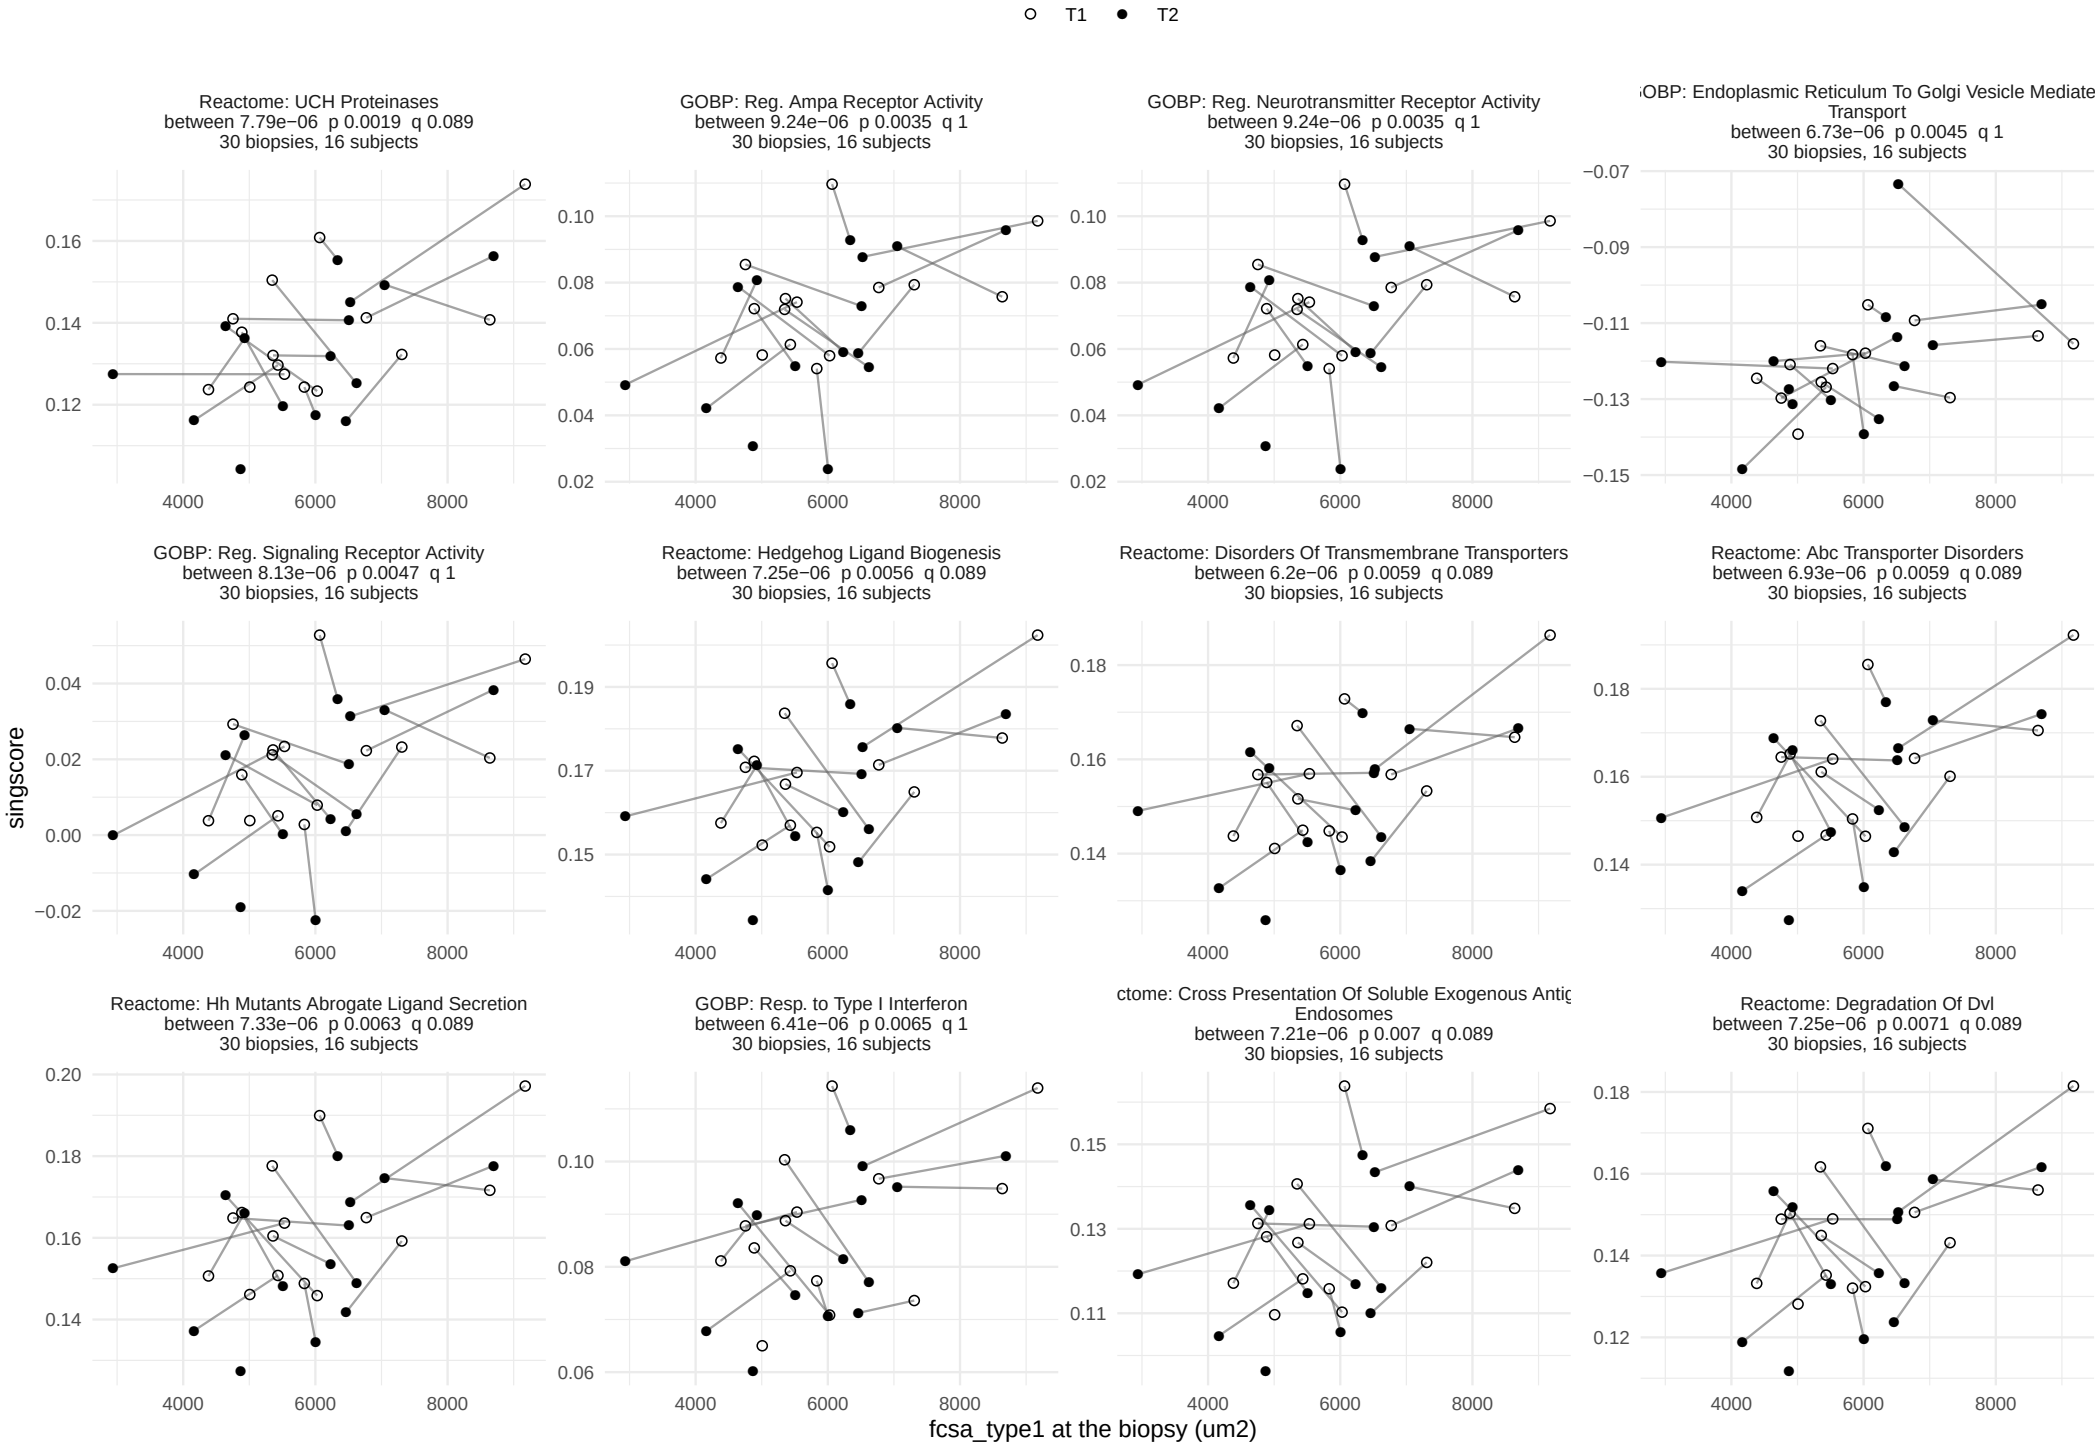

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/02_sets.xlsx, model.

fcsa_type1, between−person term


112 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 2 of 10.

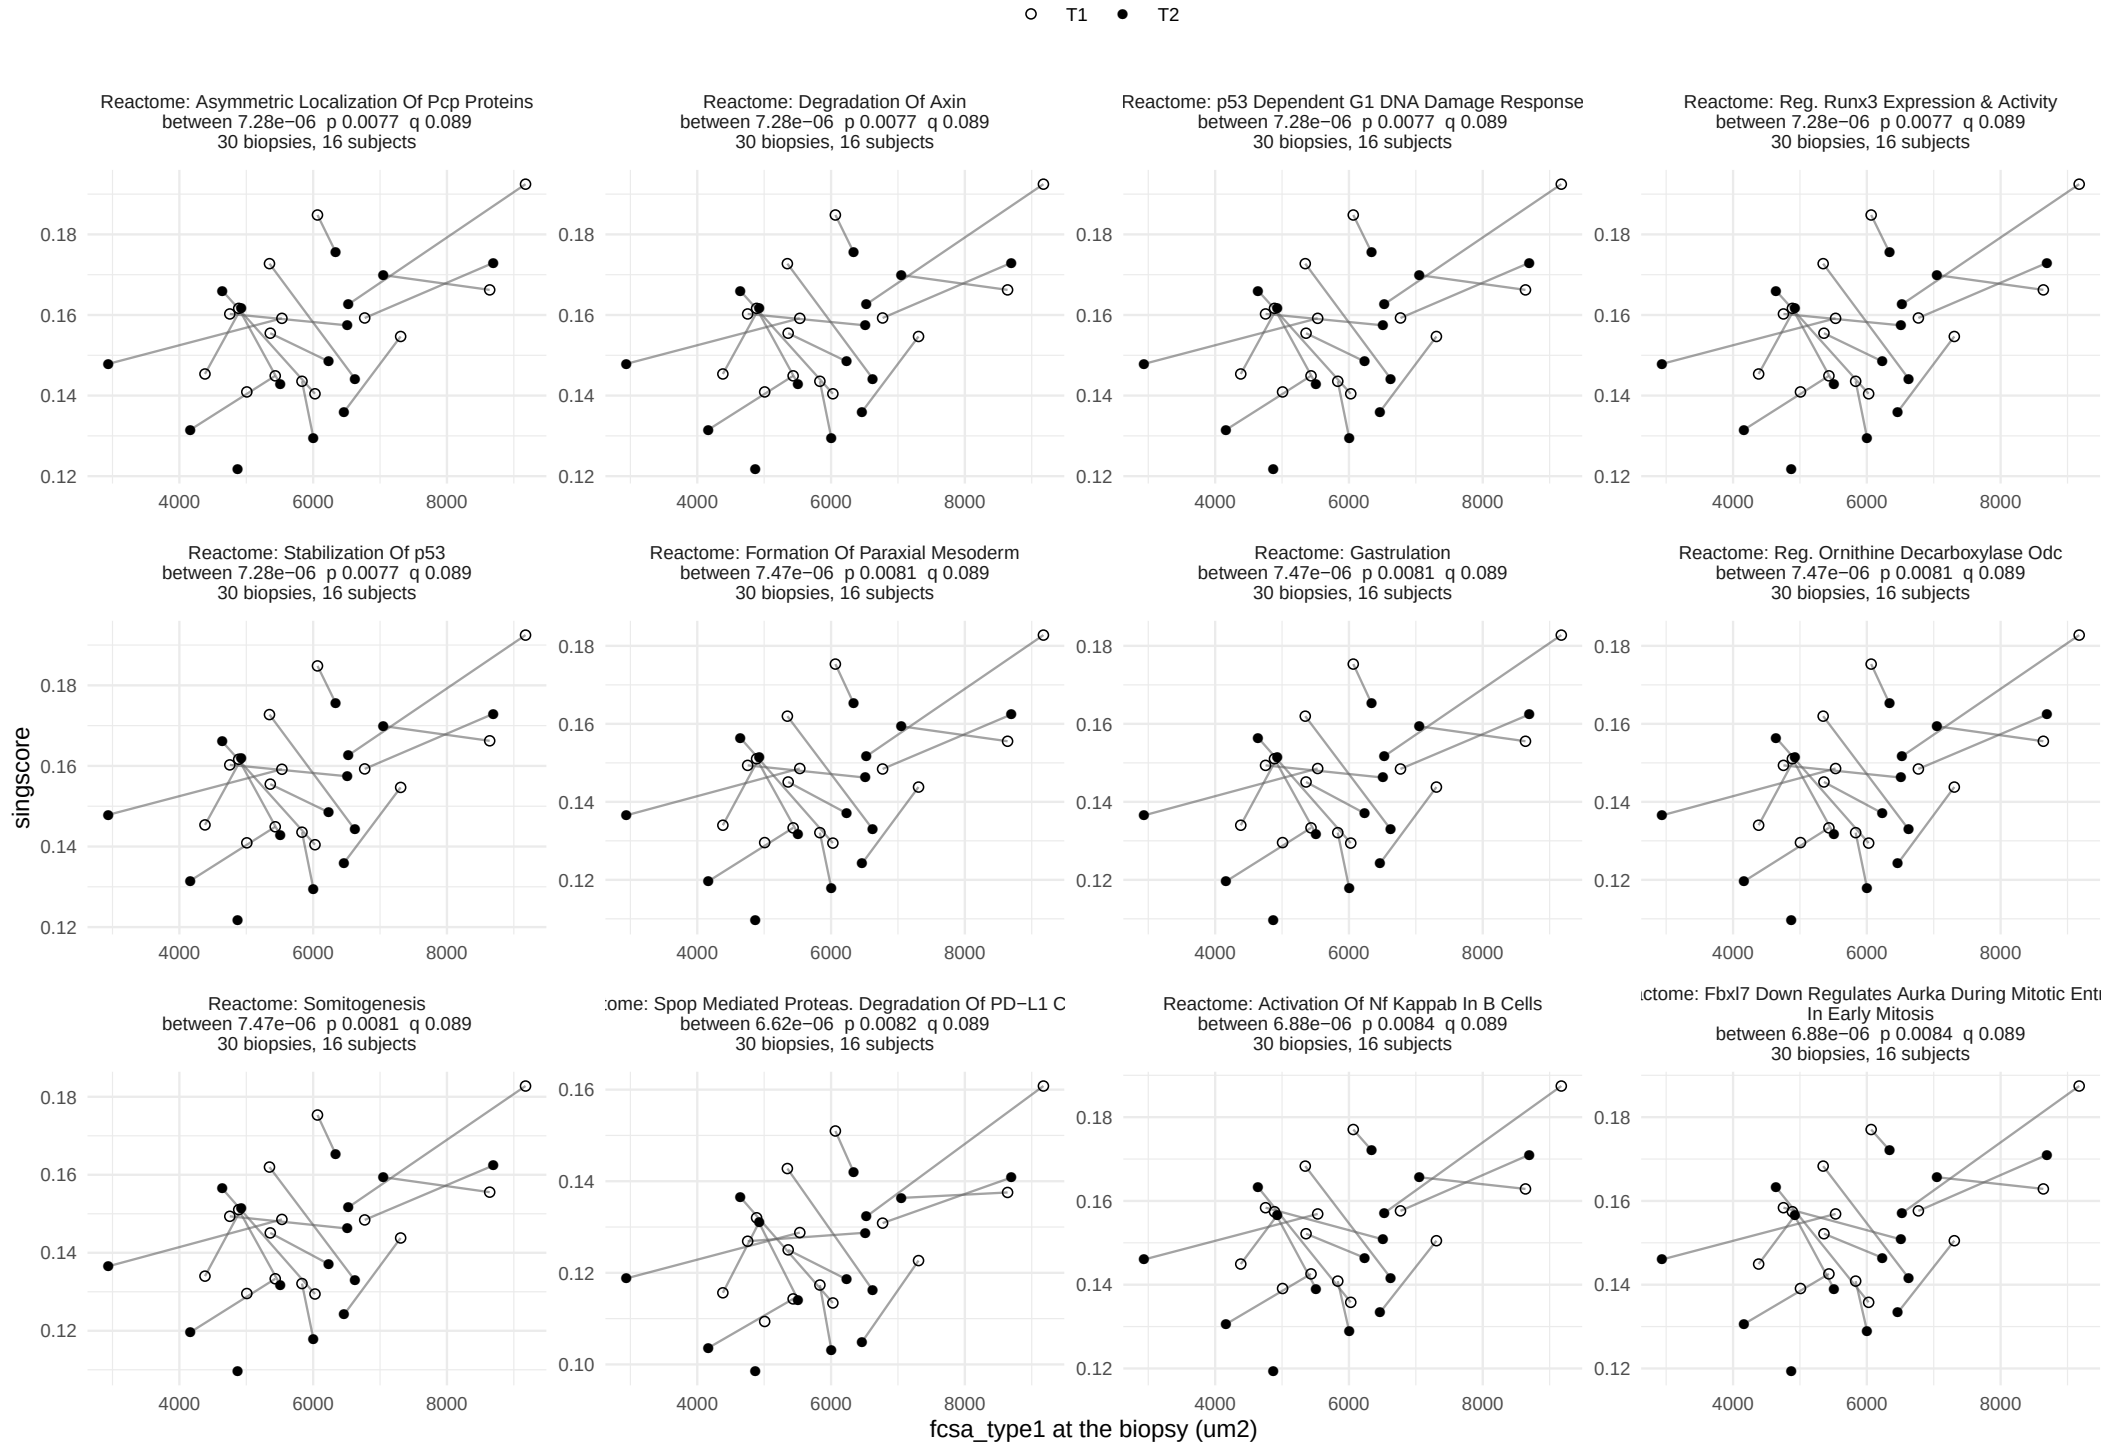

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/02_sets.xlsx, model.

fcsa_type1, between−person term


112 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 3 of 10.

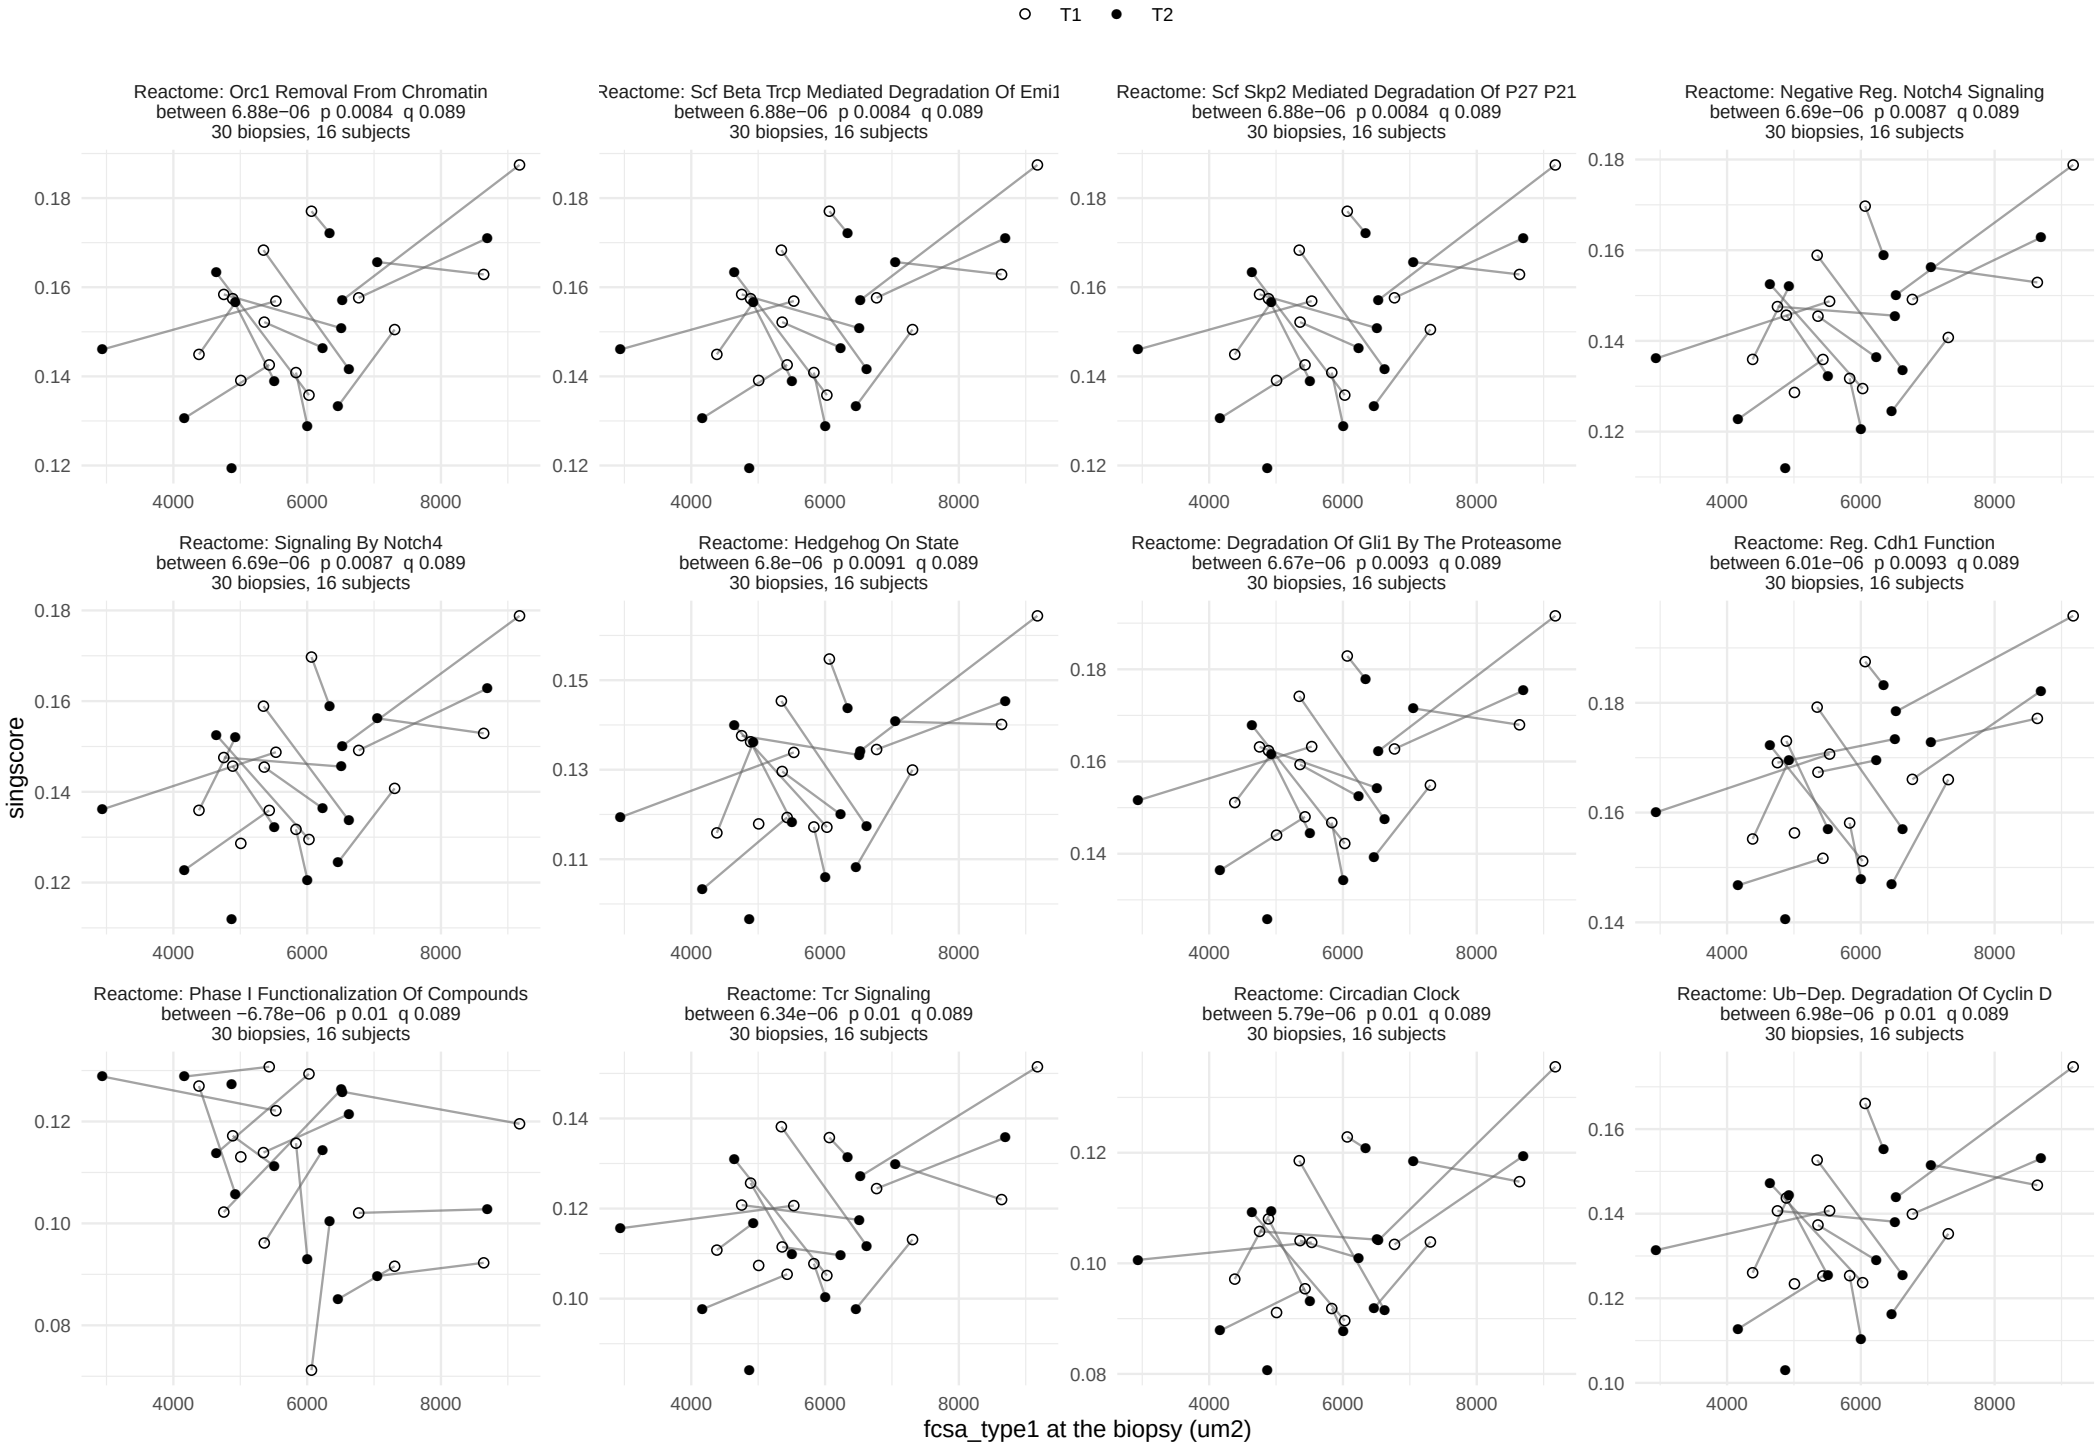

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/02_sets.xlsx, model.

fcsa_type1, between−person term


112 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 4 of 10.

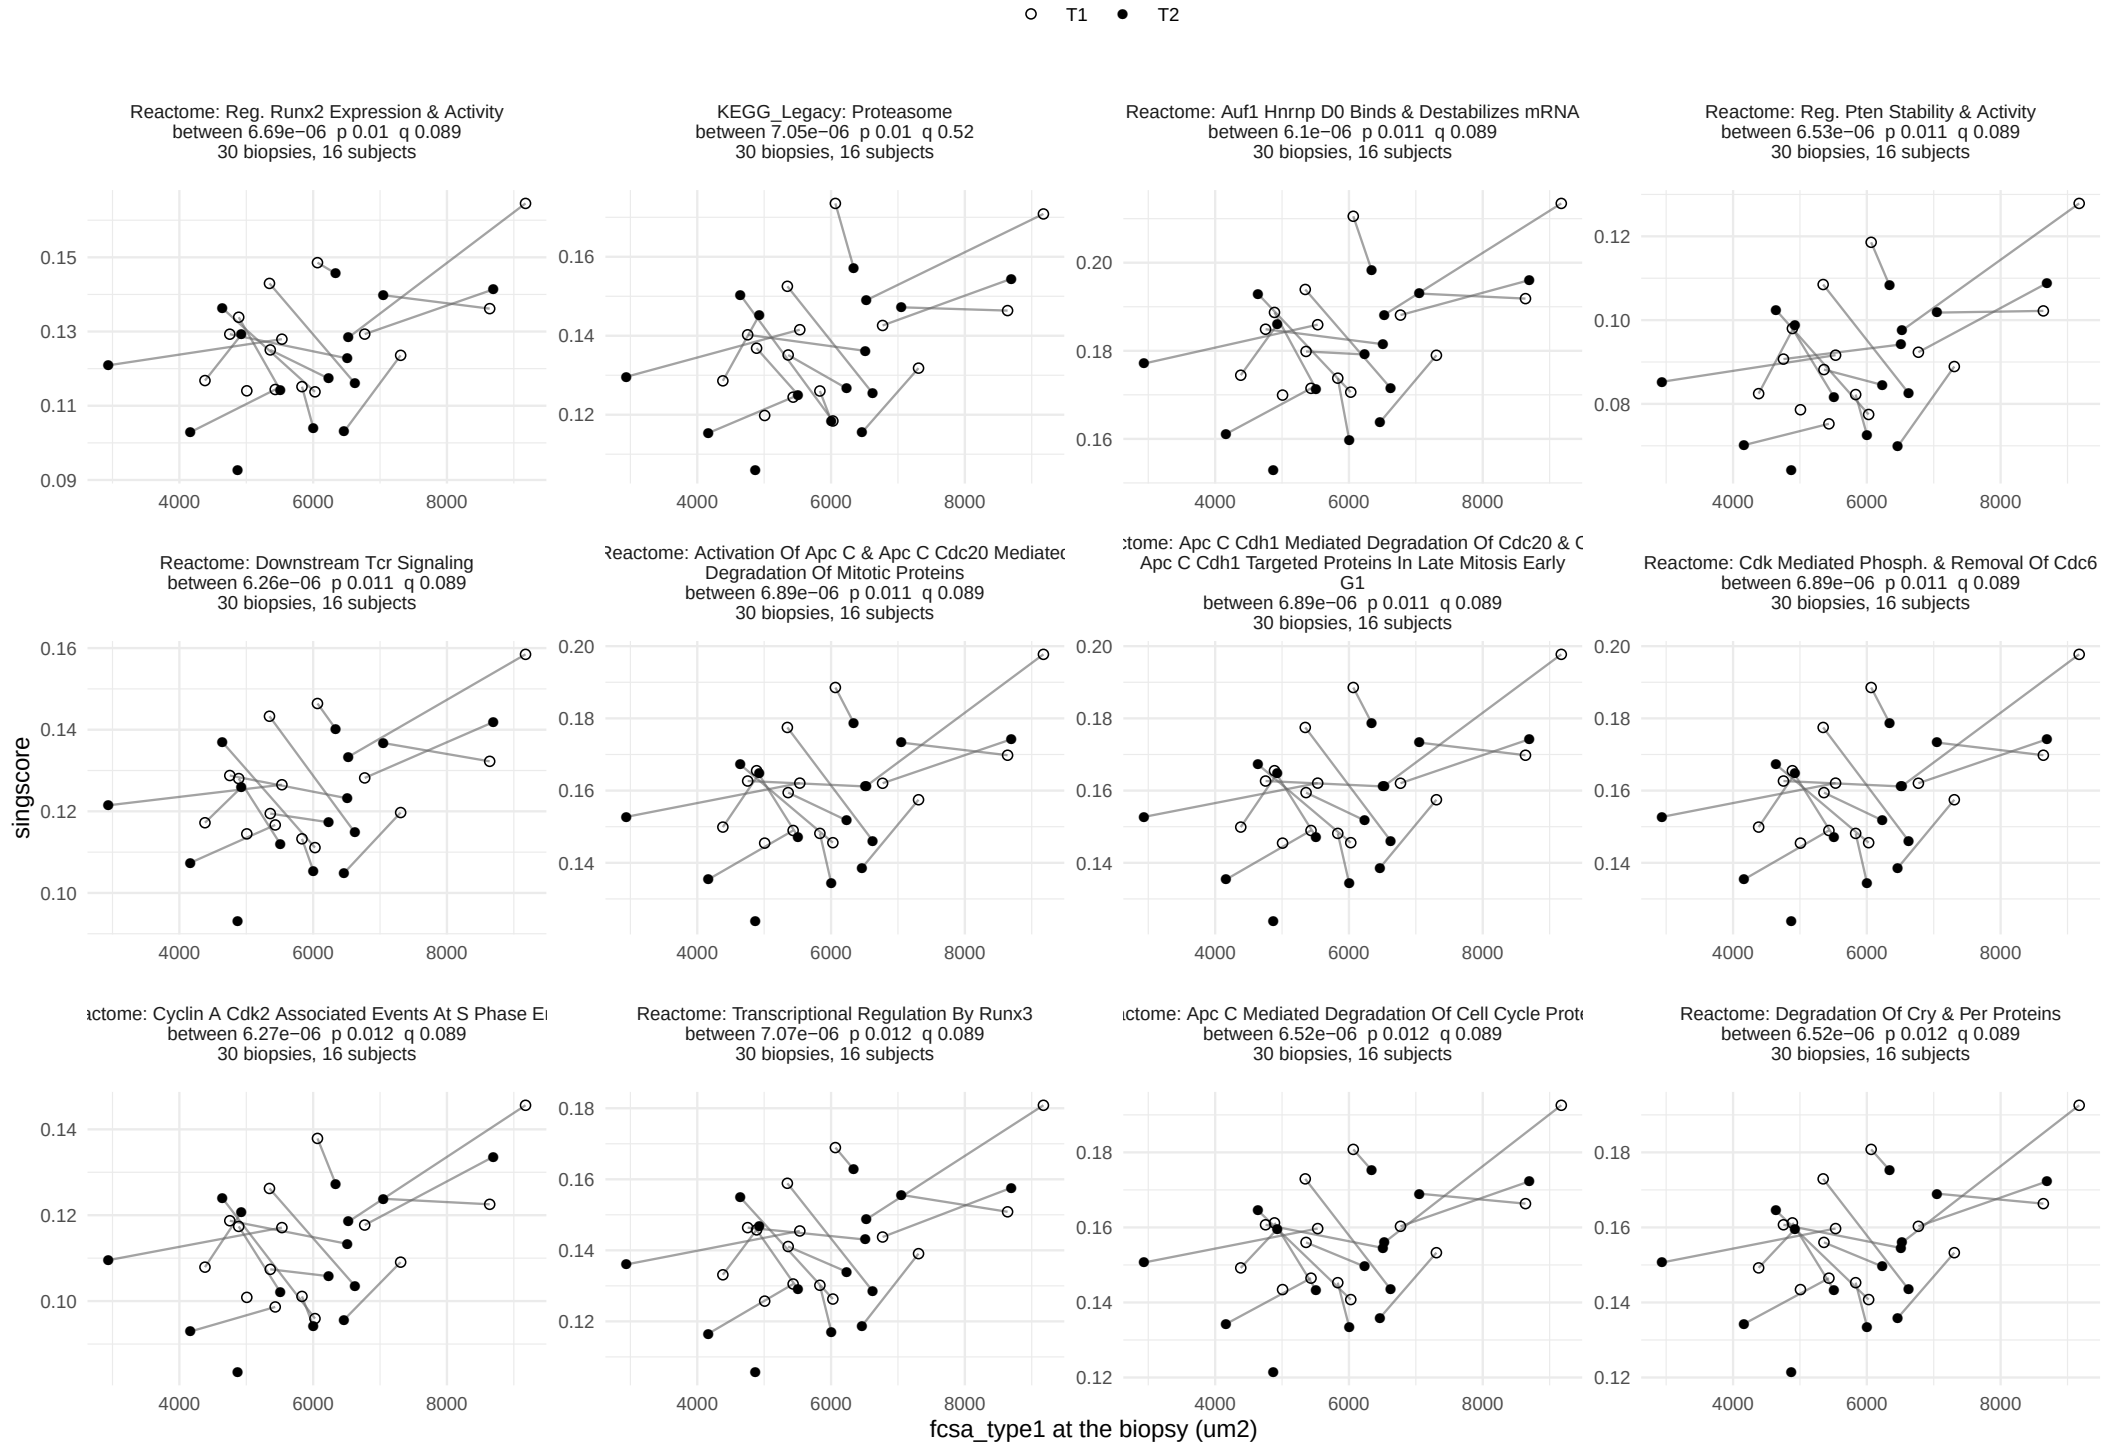

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/02_sets.xlsx, model.

fcsa_type1, between−person term


112 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 5 of 10.

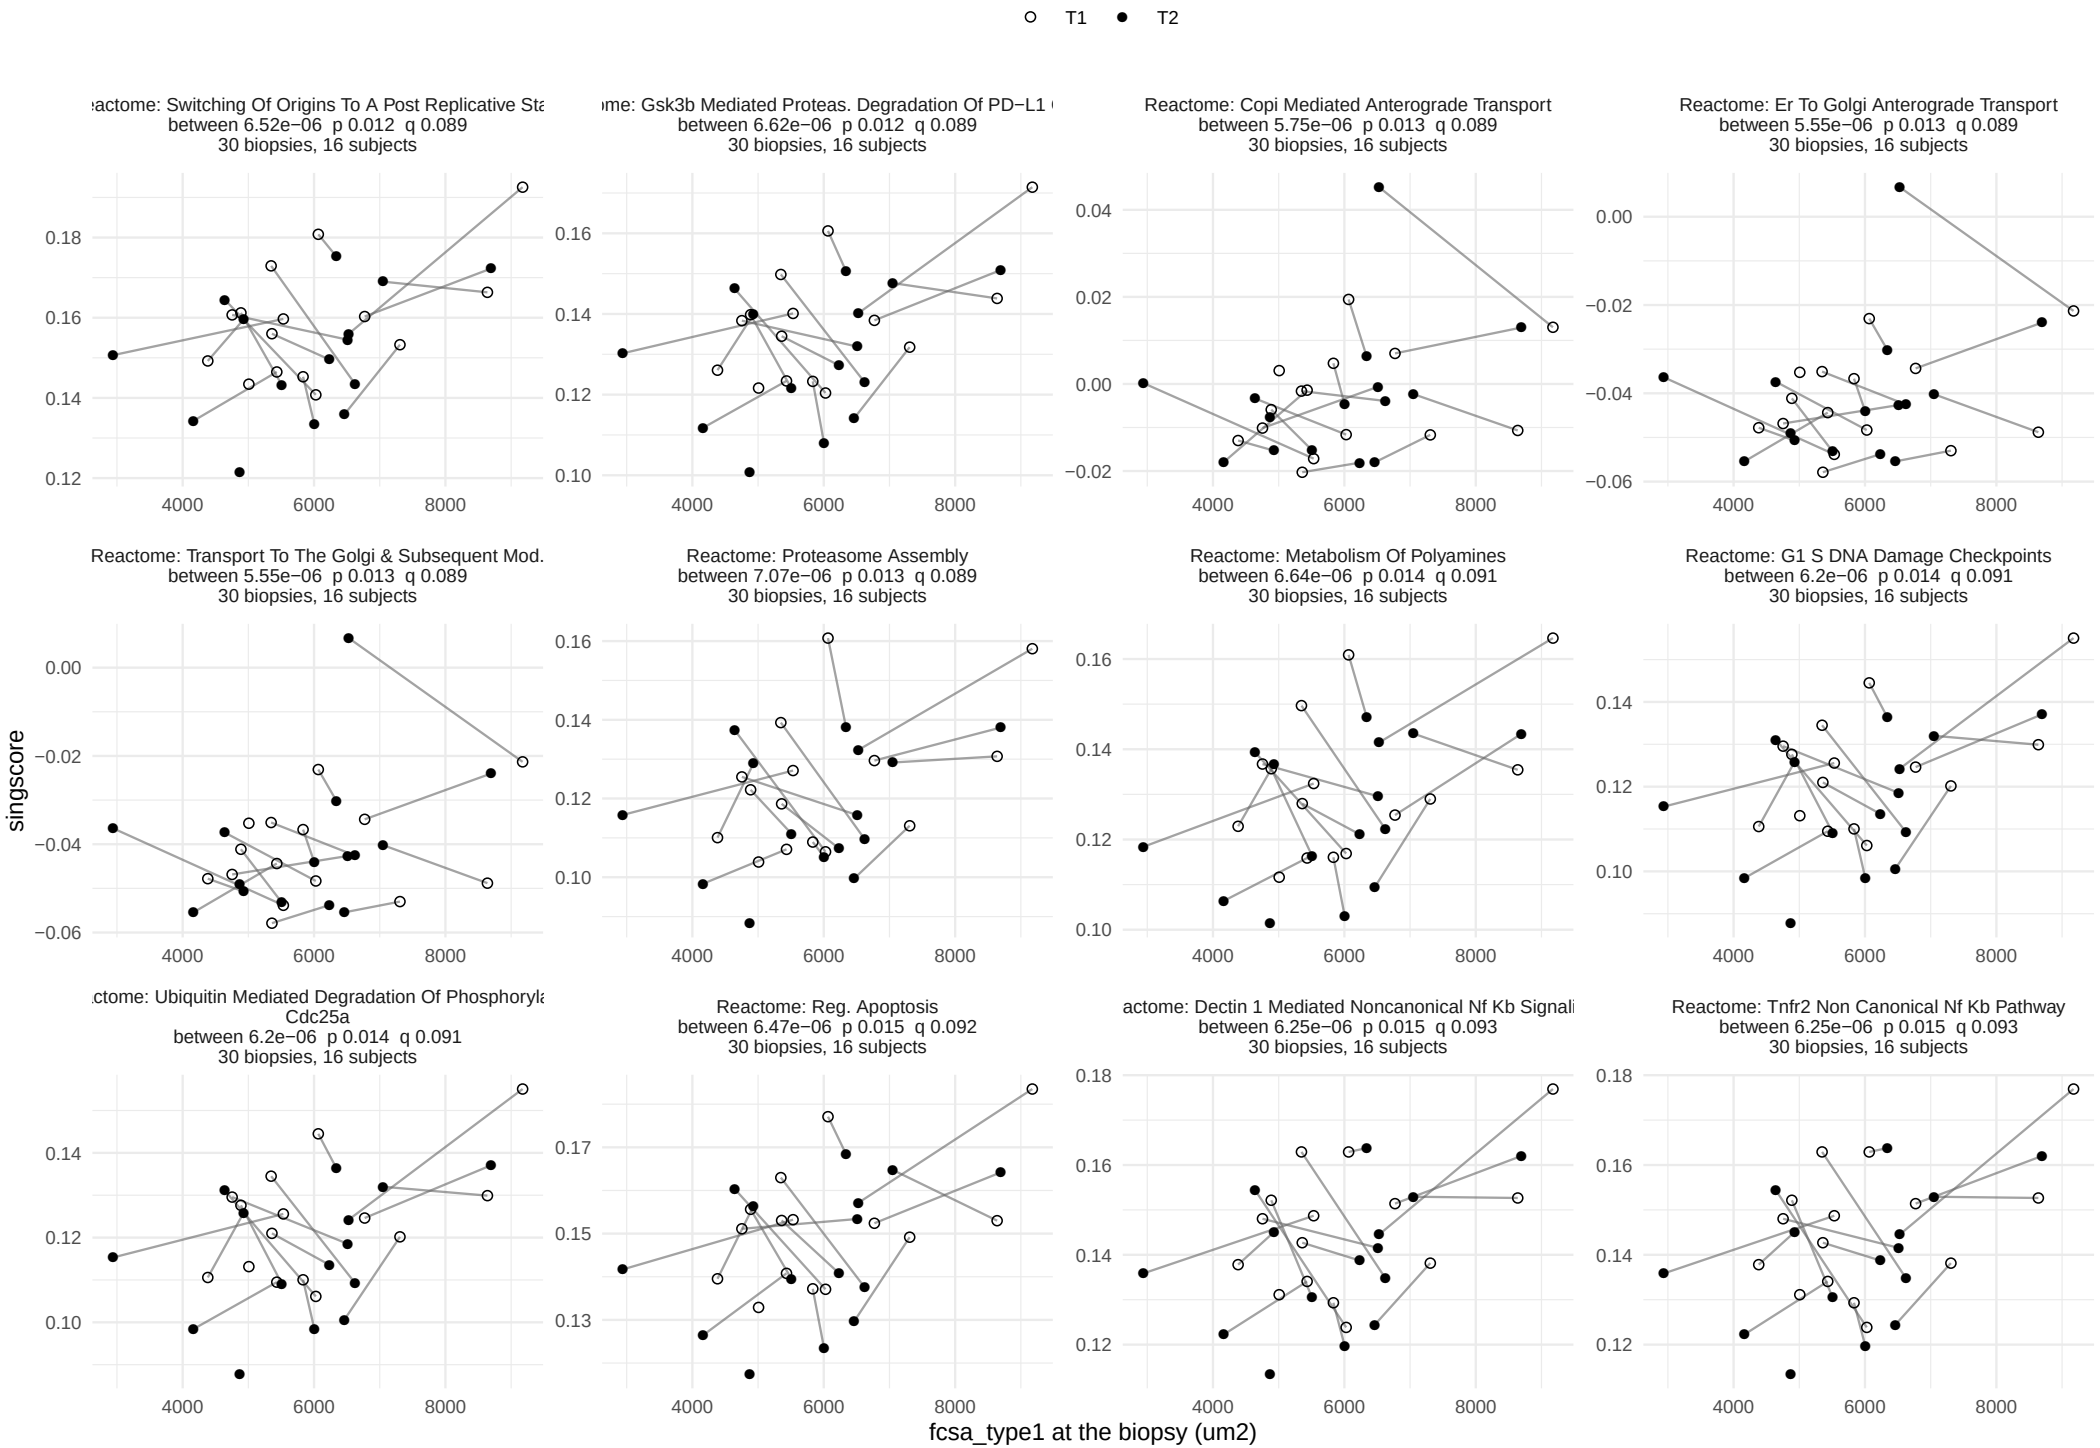

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/02_sets.xlsx, model.

fcsa_type1, between−person term


112 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 6 of 10.

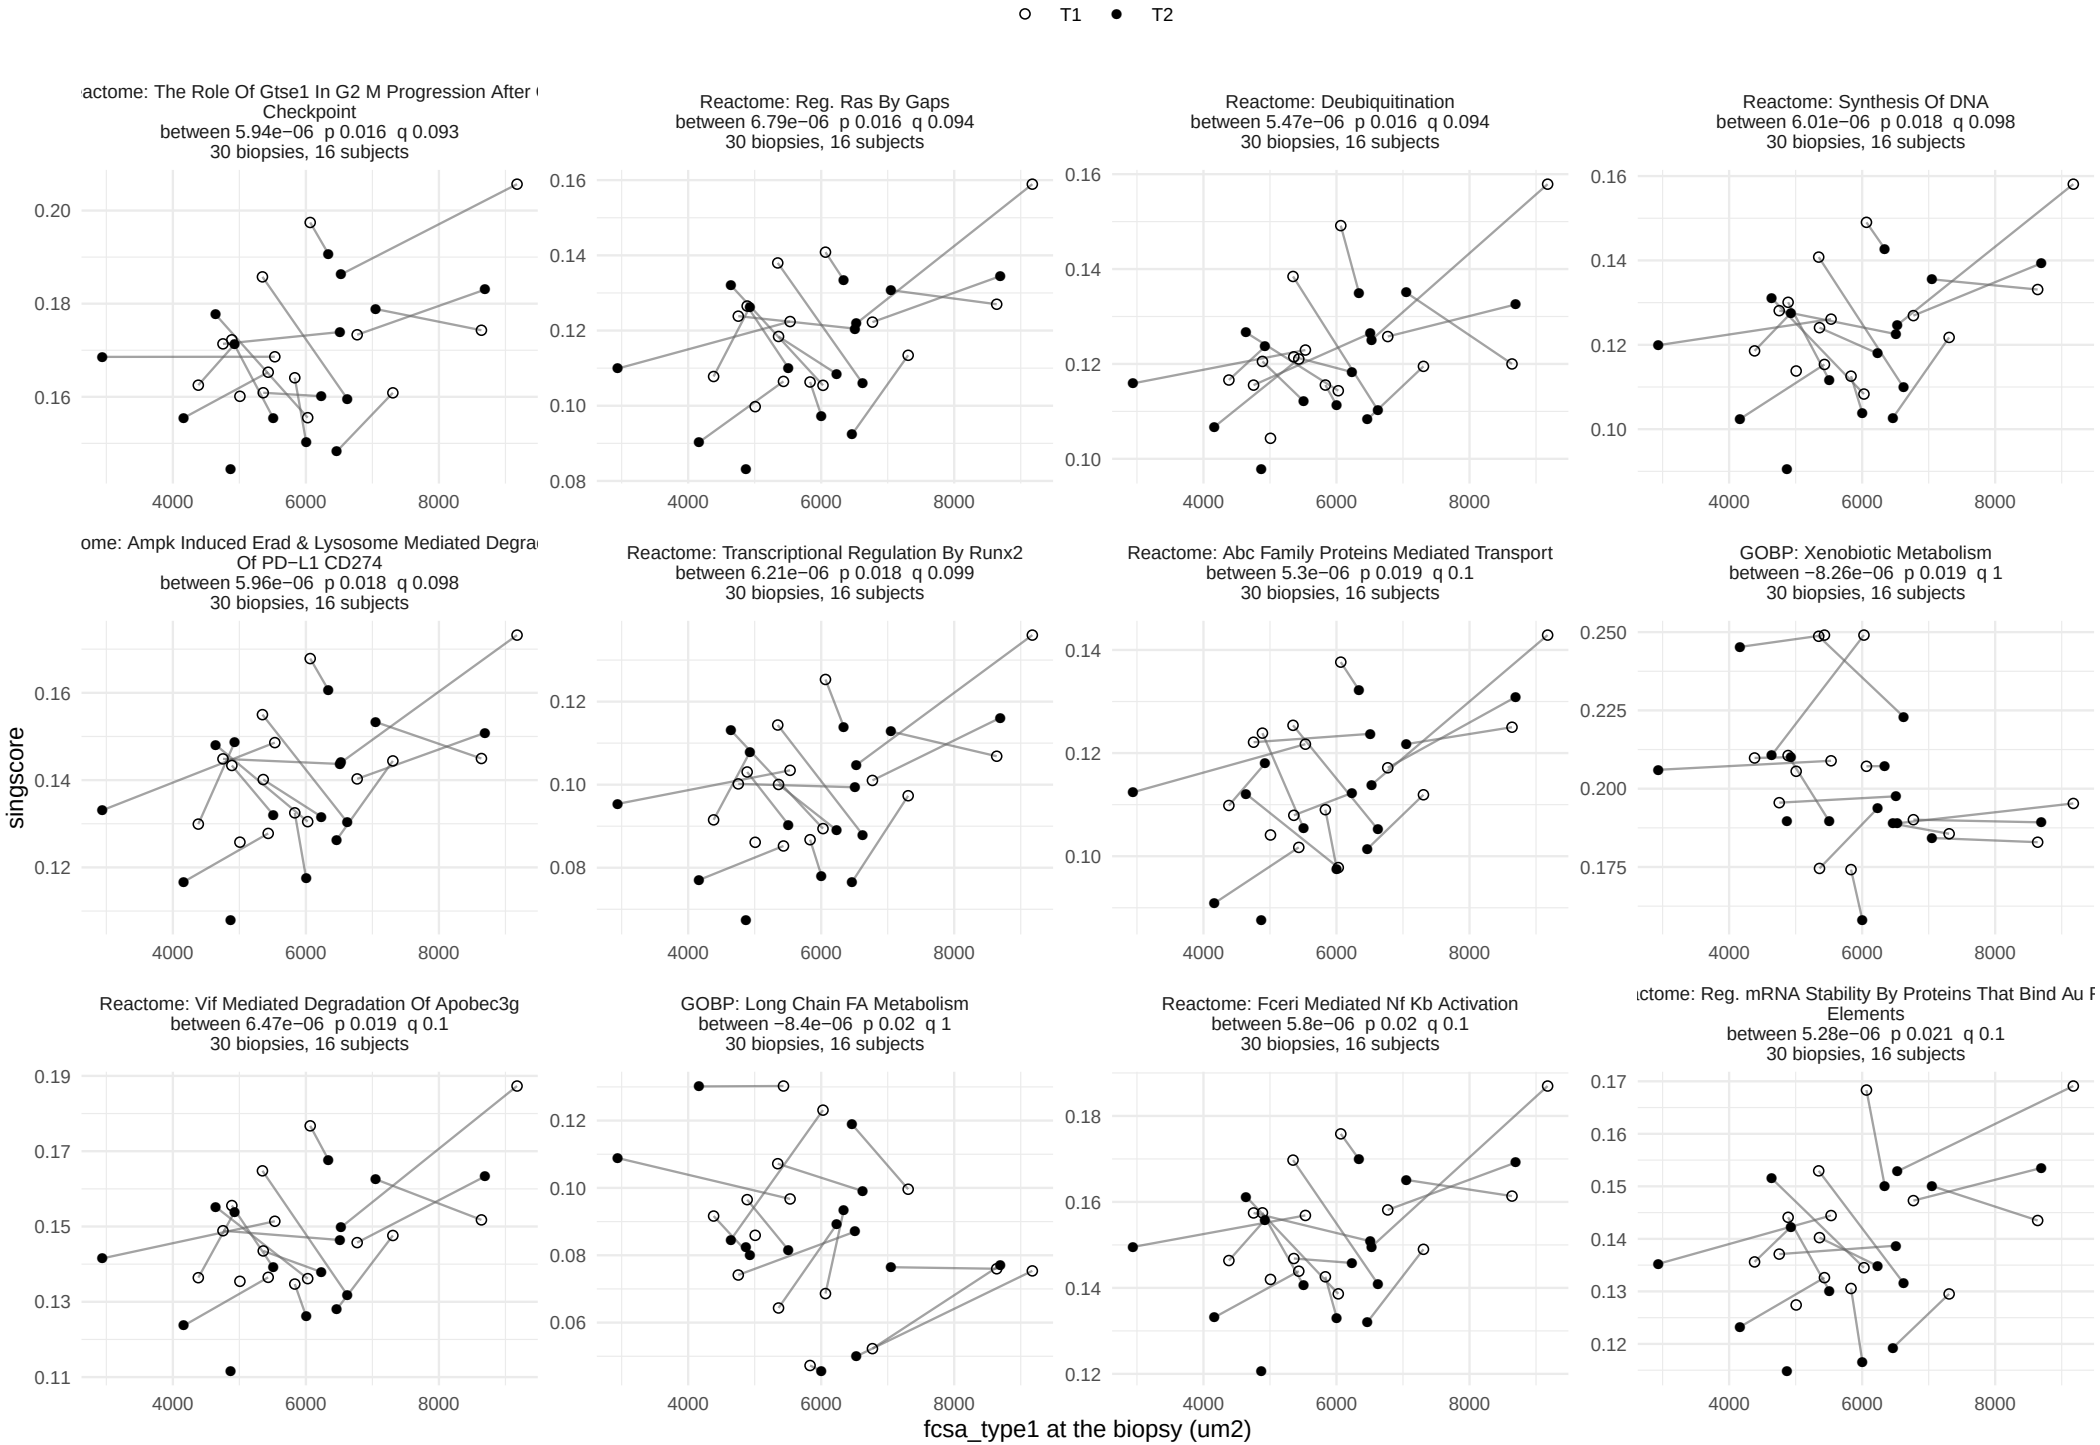

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/02_sets.xlsx, model.

fcsa_type1, between−person term


112 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 7 of 10.

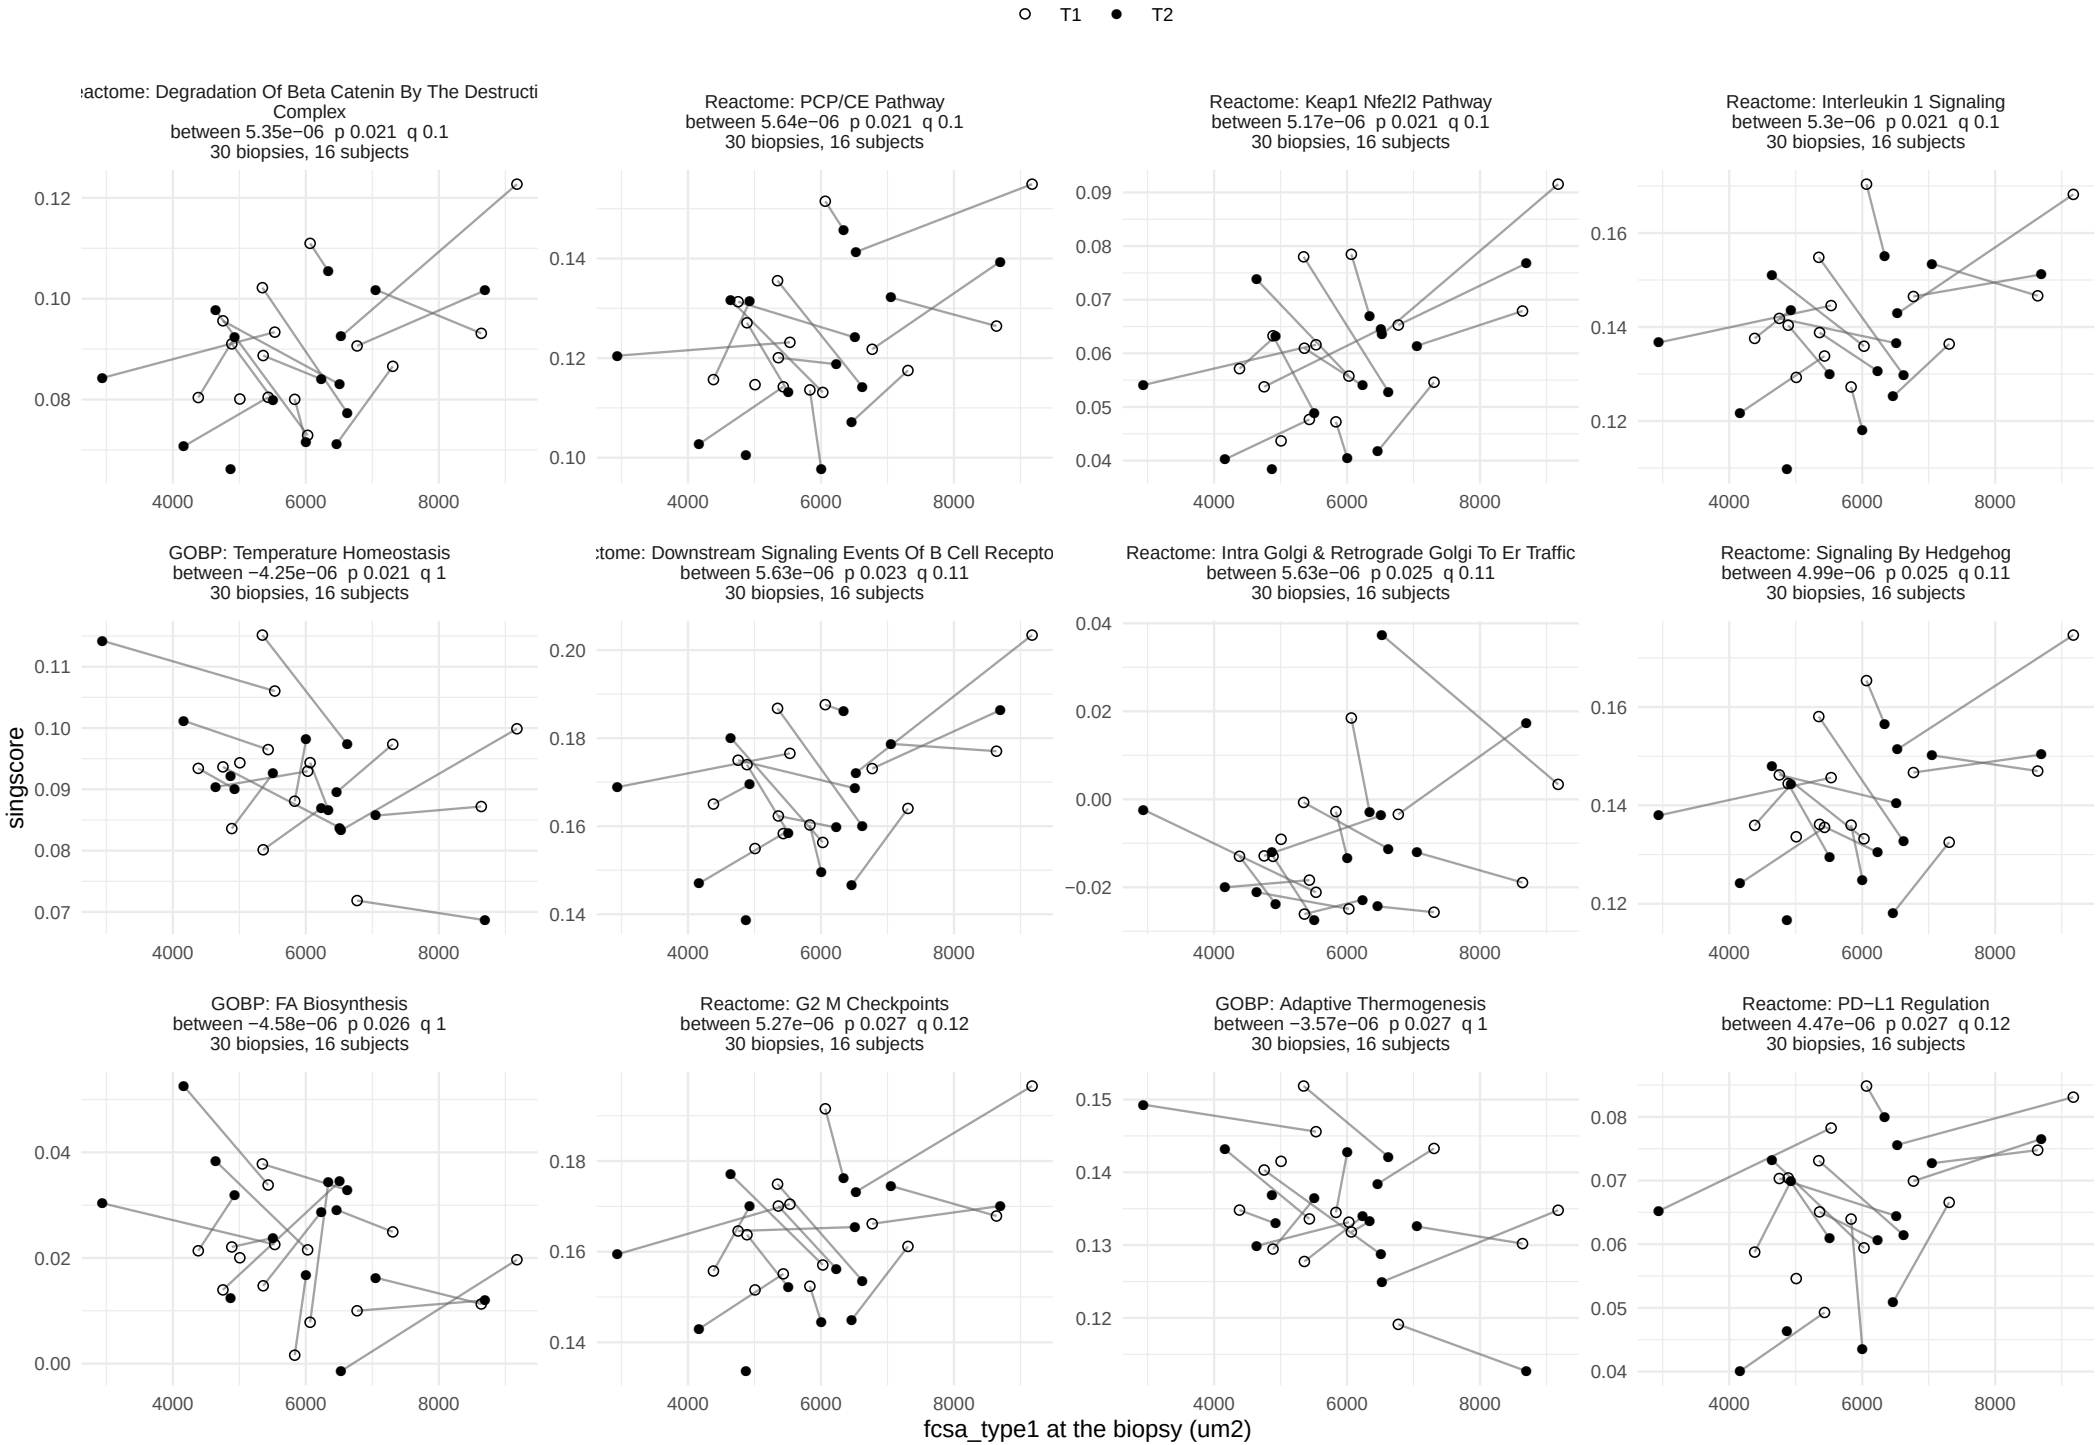

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/02_sets.xlsx, model.

fcsa_type1, between−person term


112 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 8 of 10.

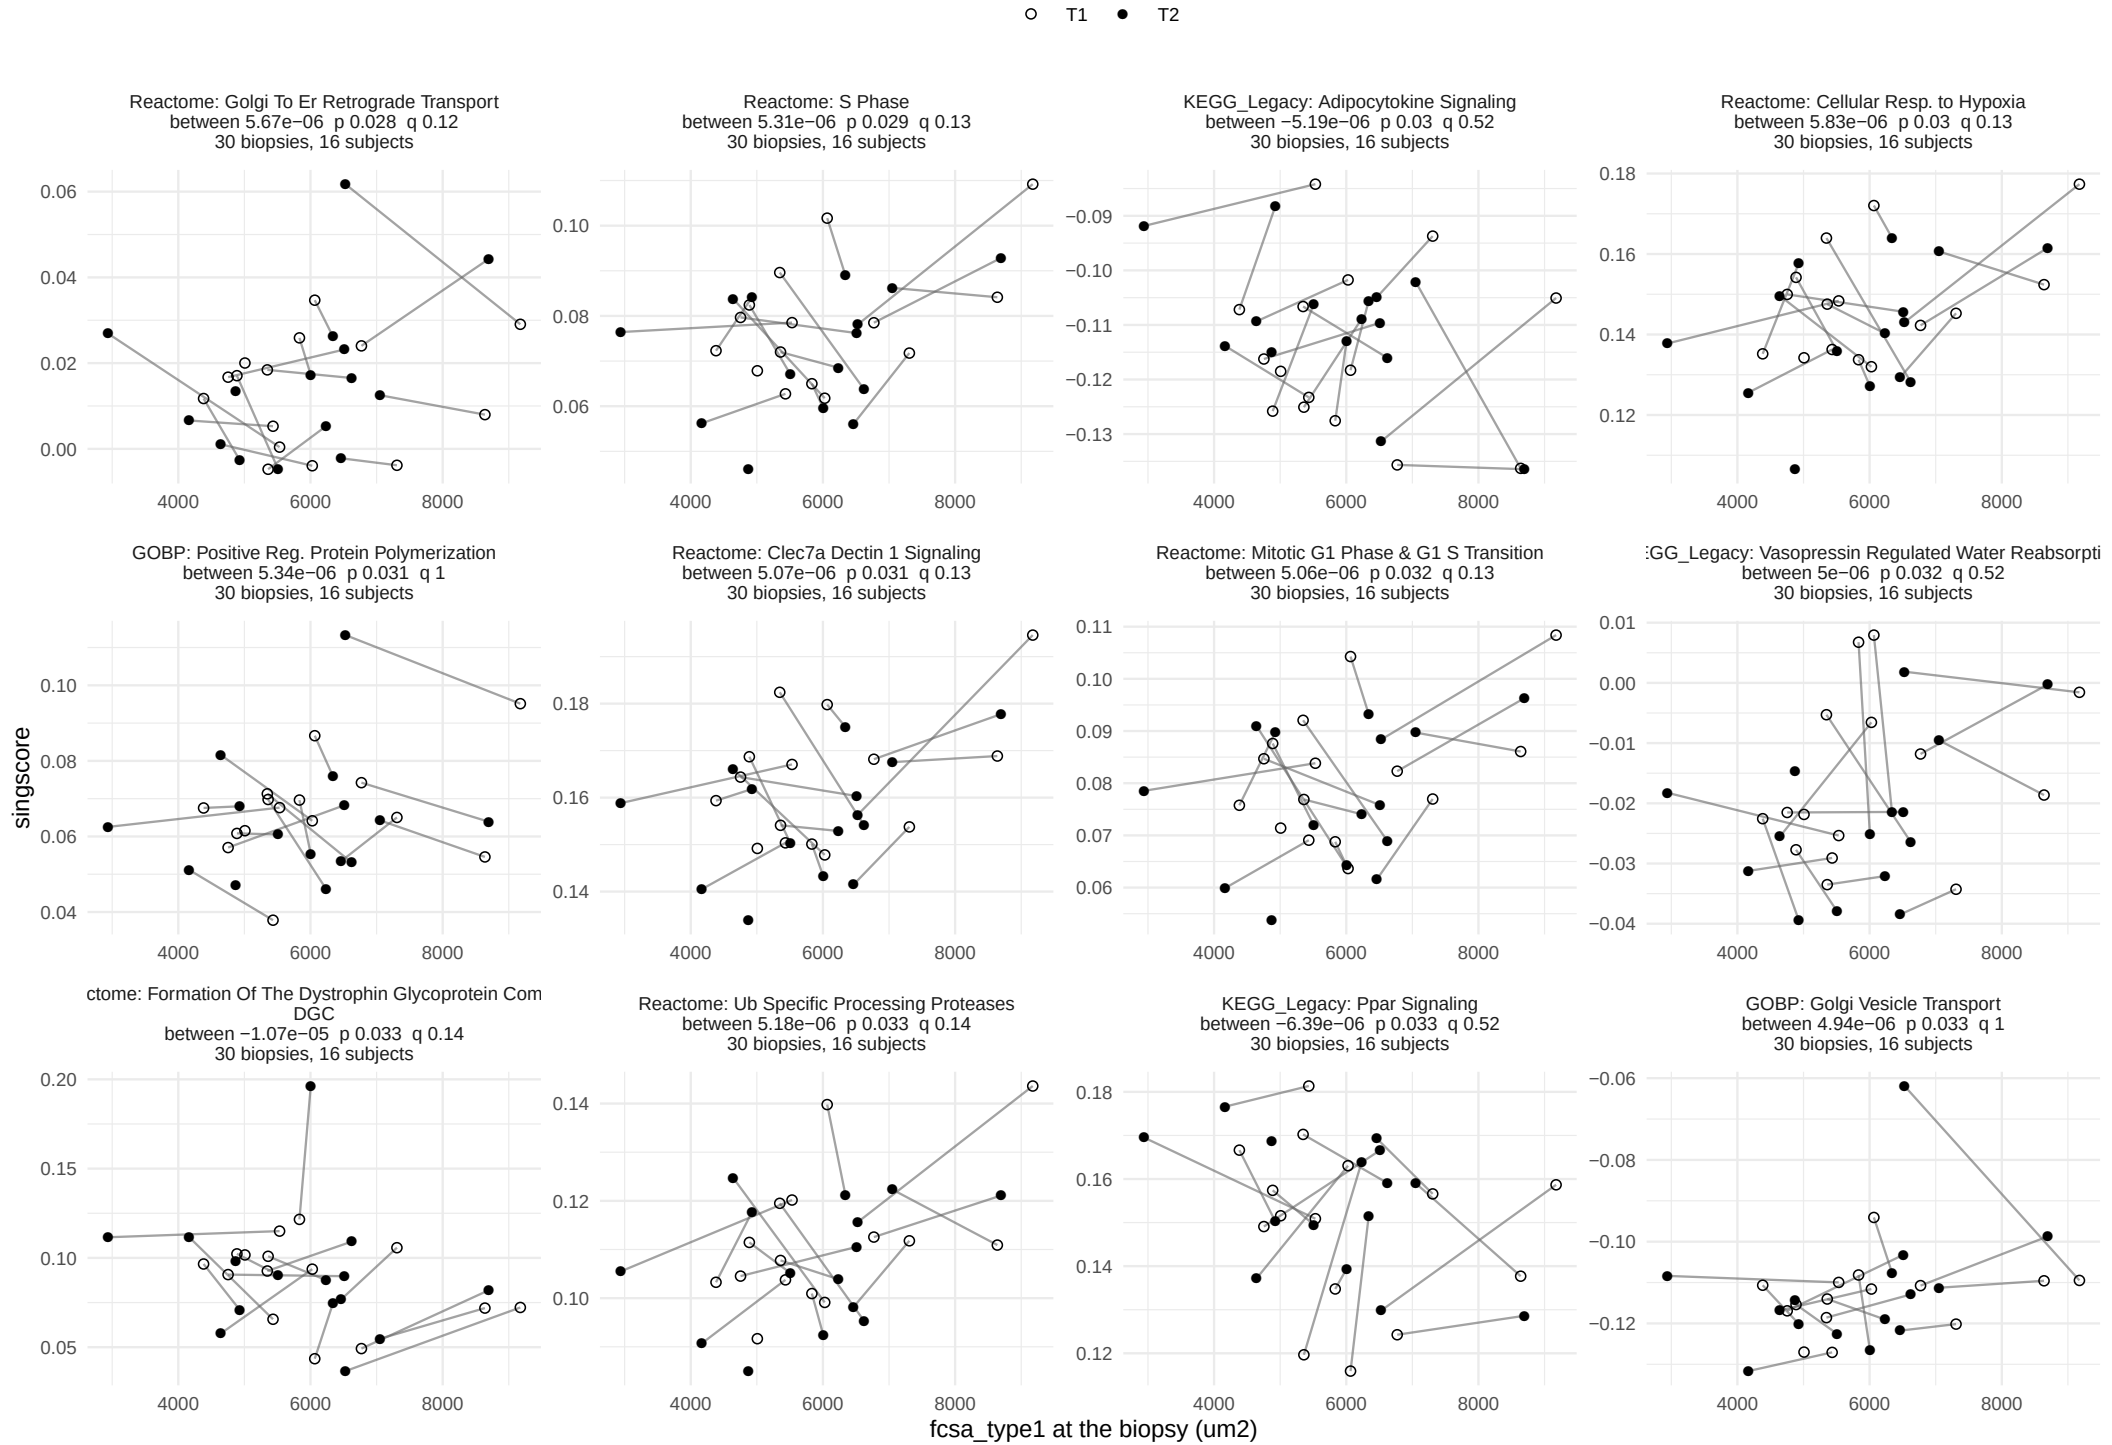

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/02_sets.xlsx, model.

fcsa_type1, between−person term


112 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 9 of 10.

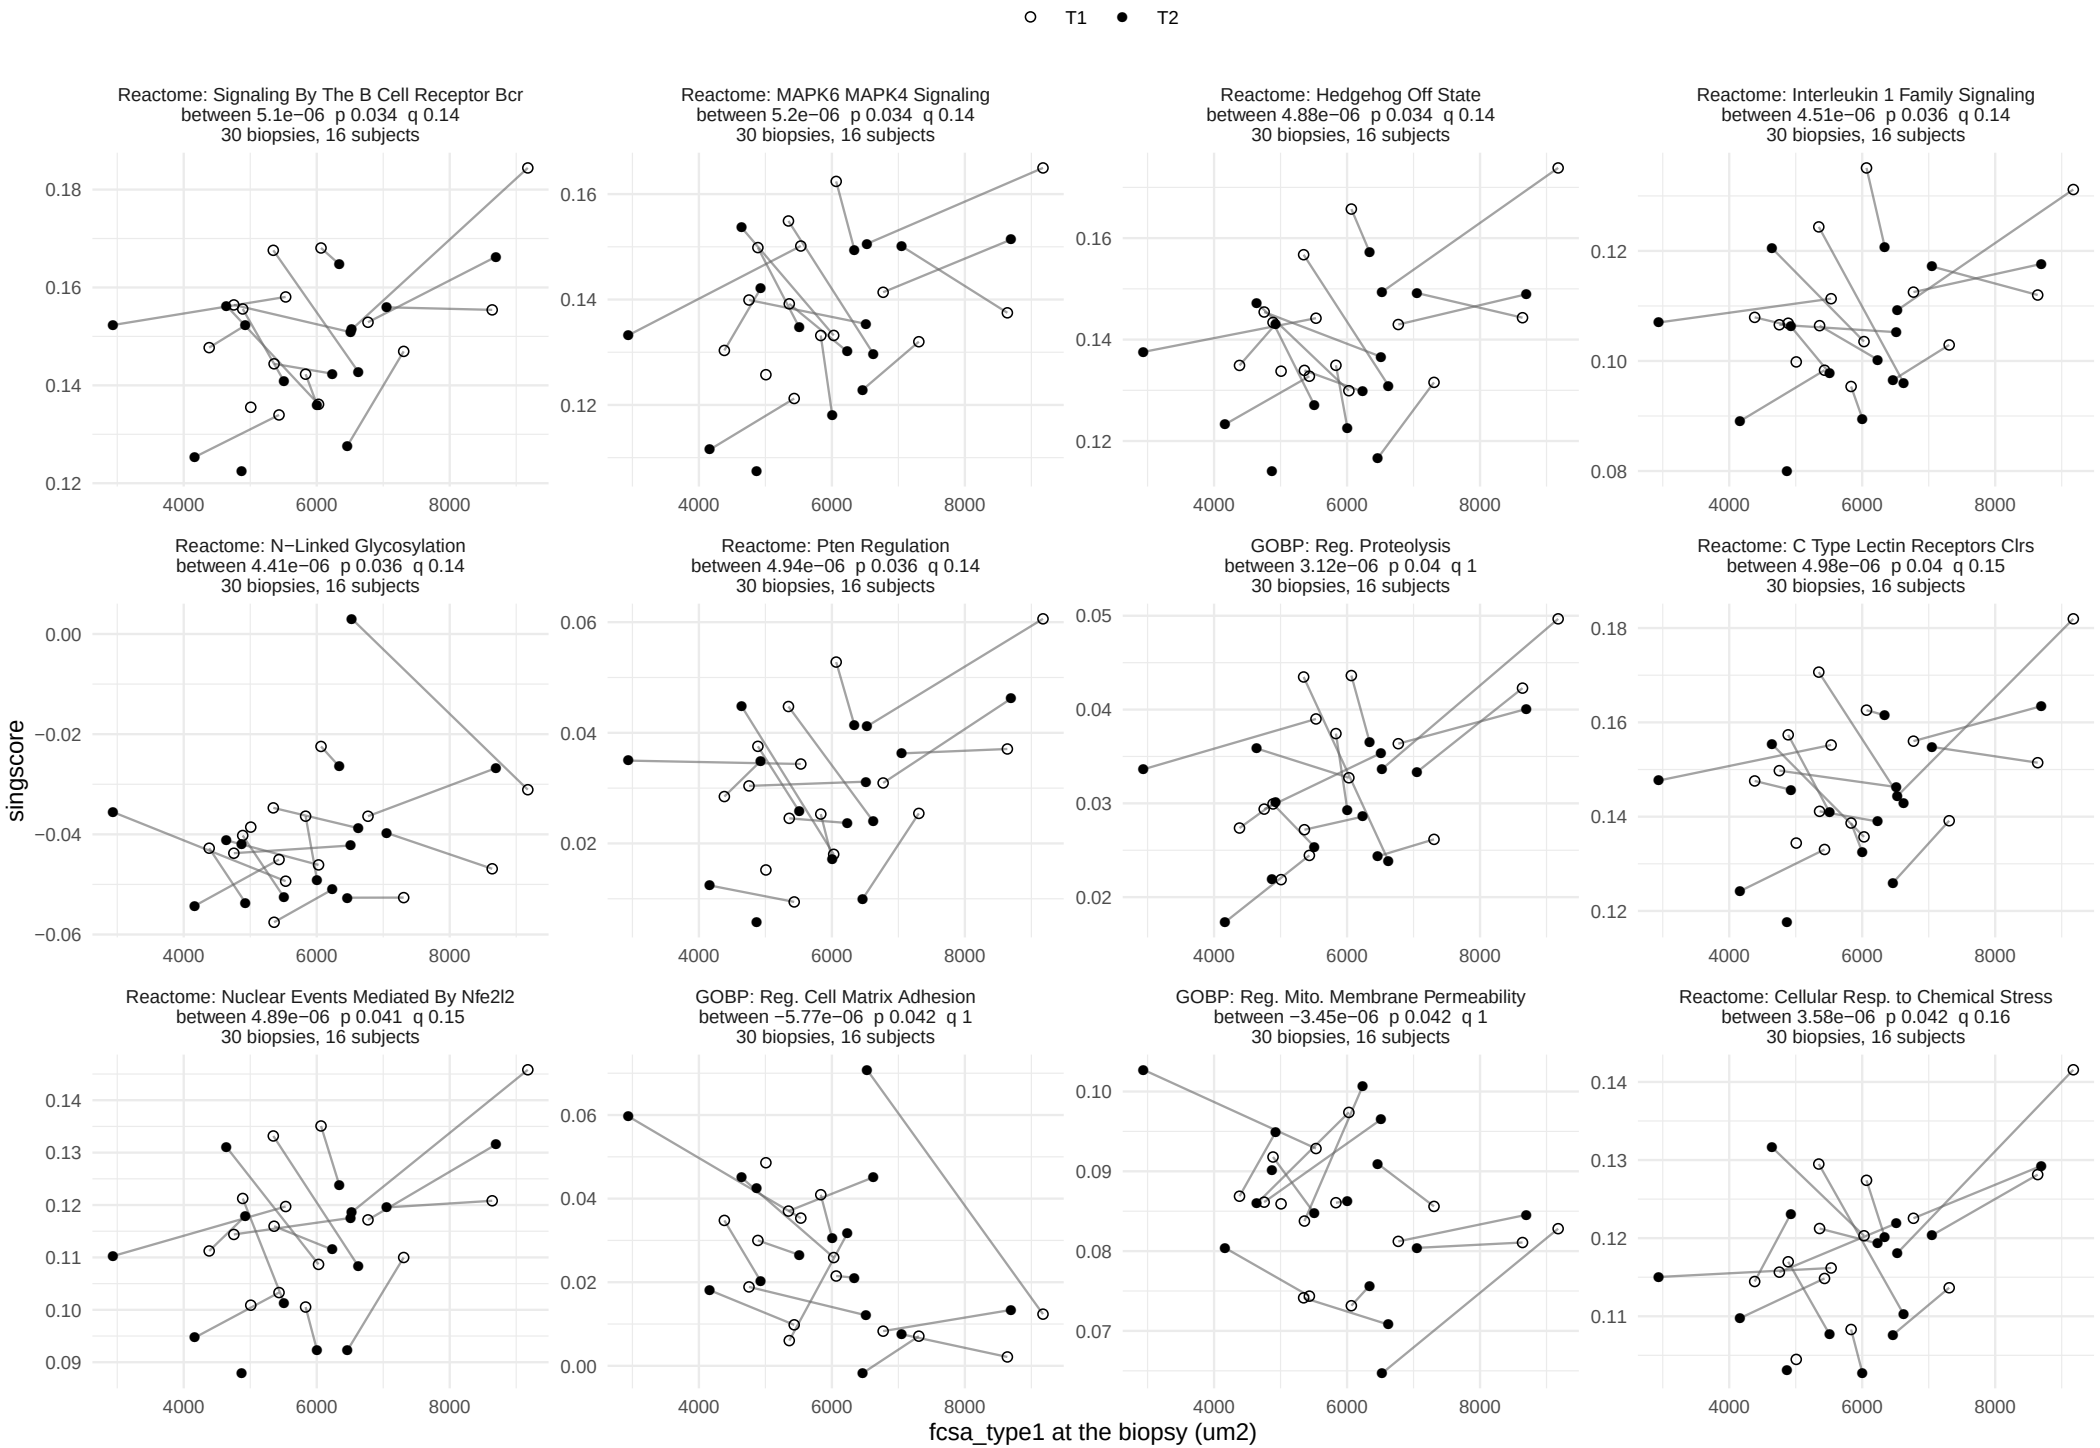

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/02_sets.xlsx, model.

fcsa_type1, between−person term


112 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 10 of 10.

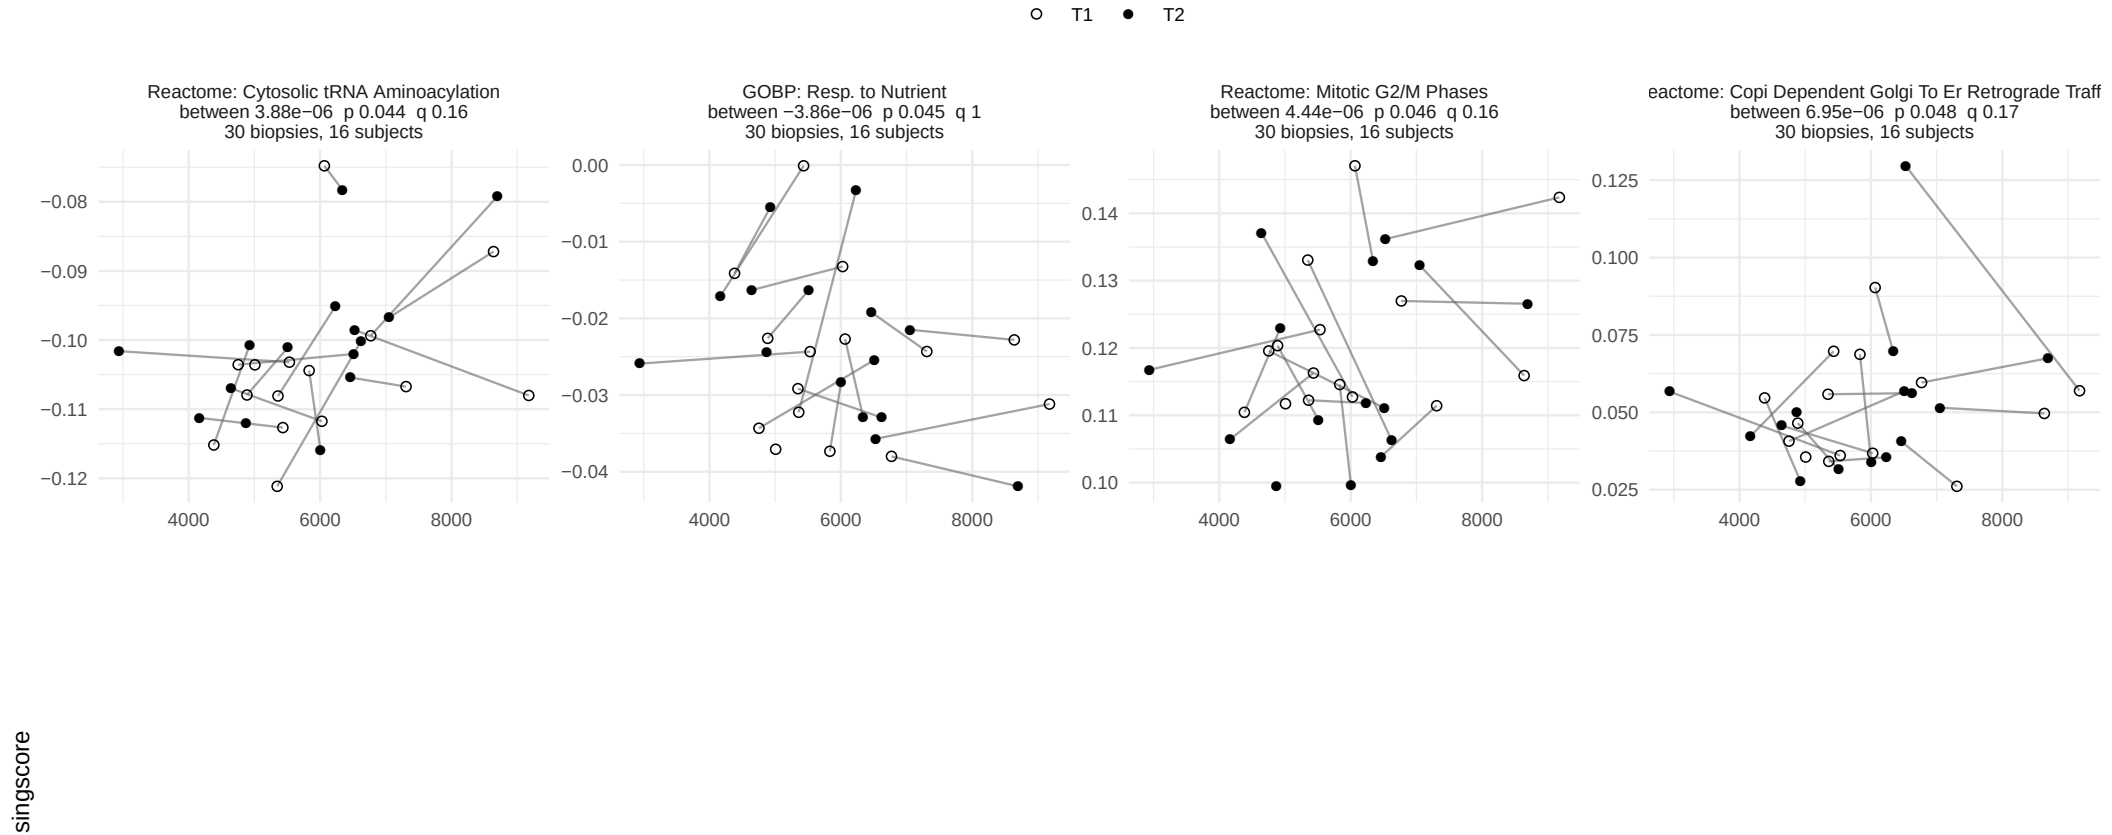

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/02_sets.xlsx, model.

fcsa_type2, within−person term


88 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 1 of 8.

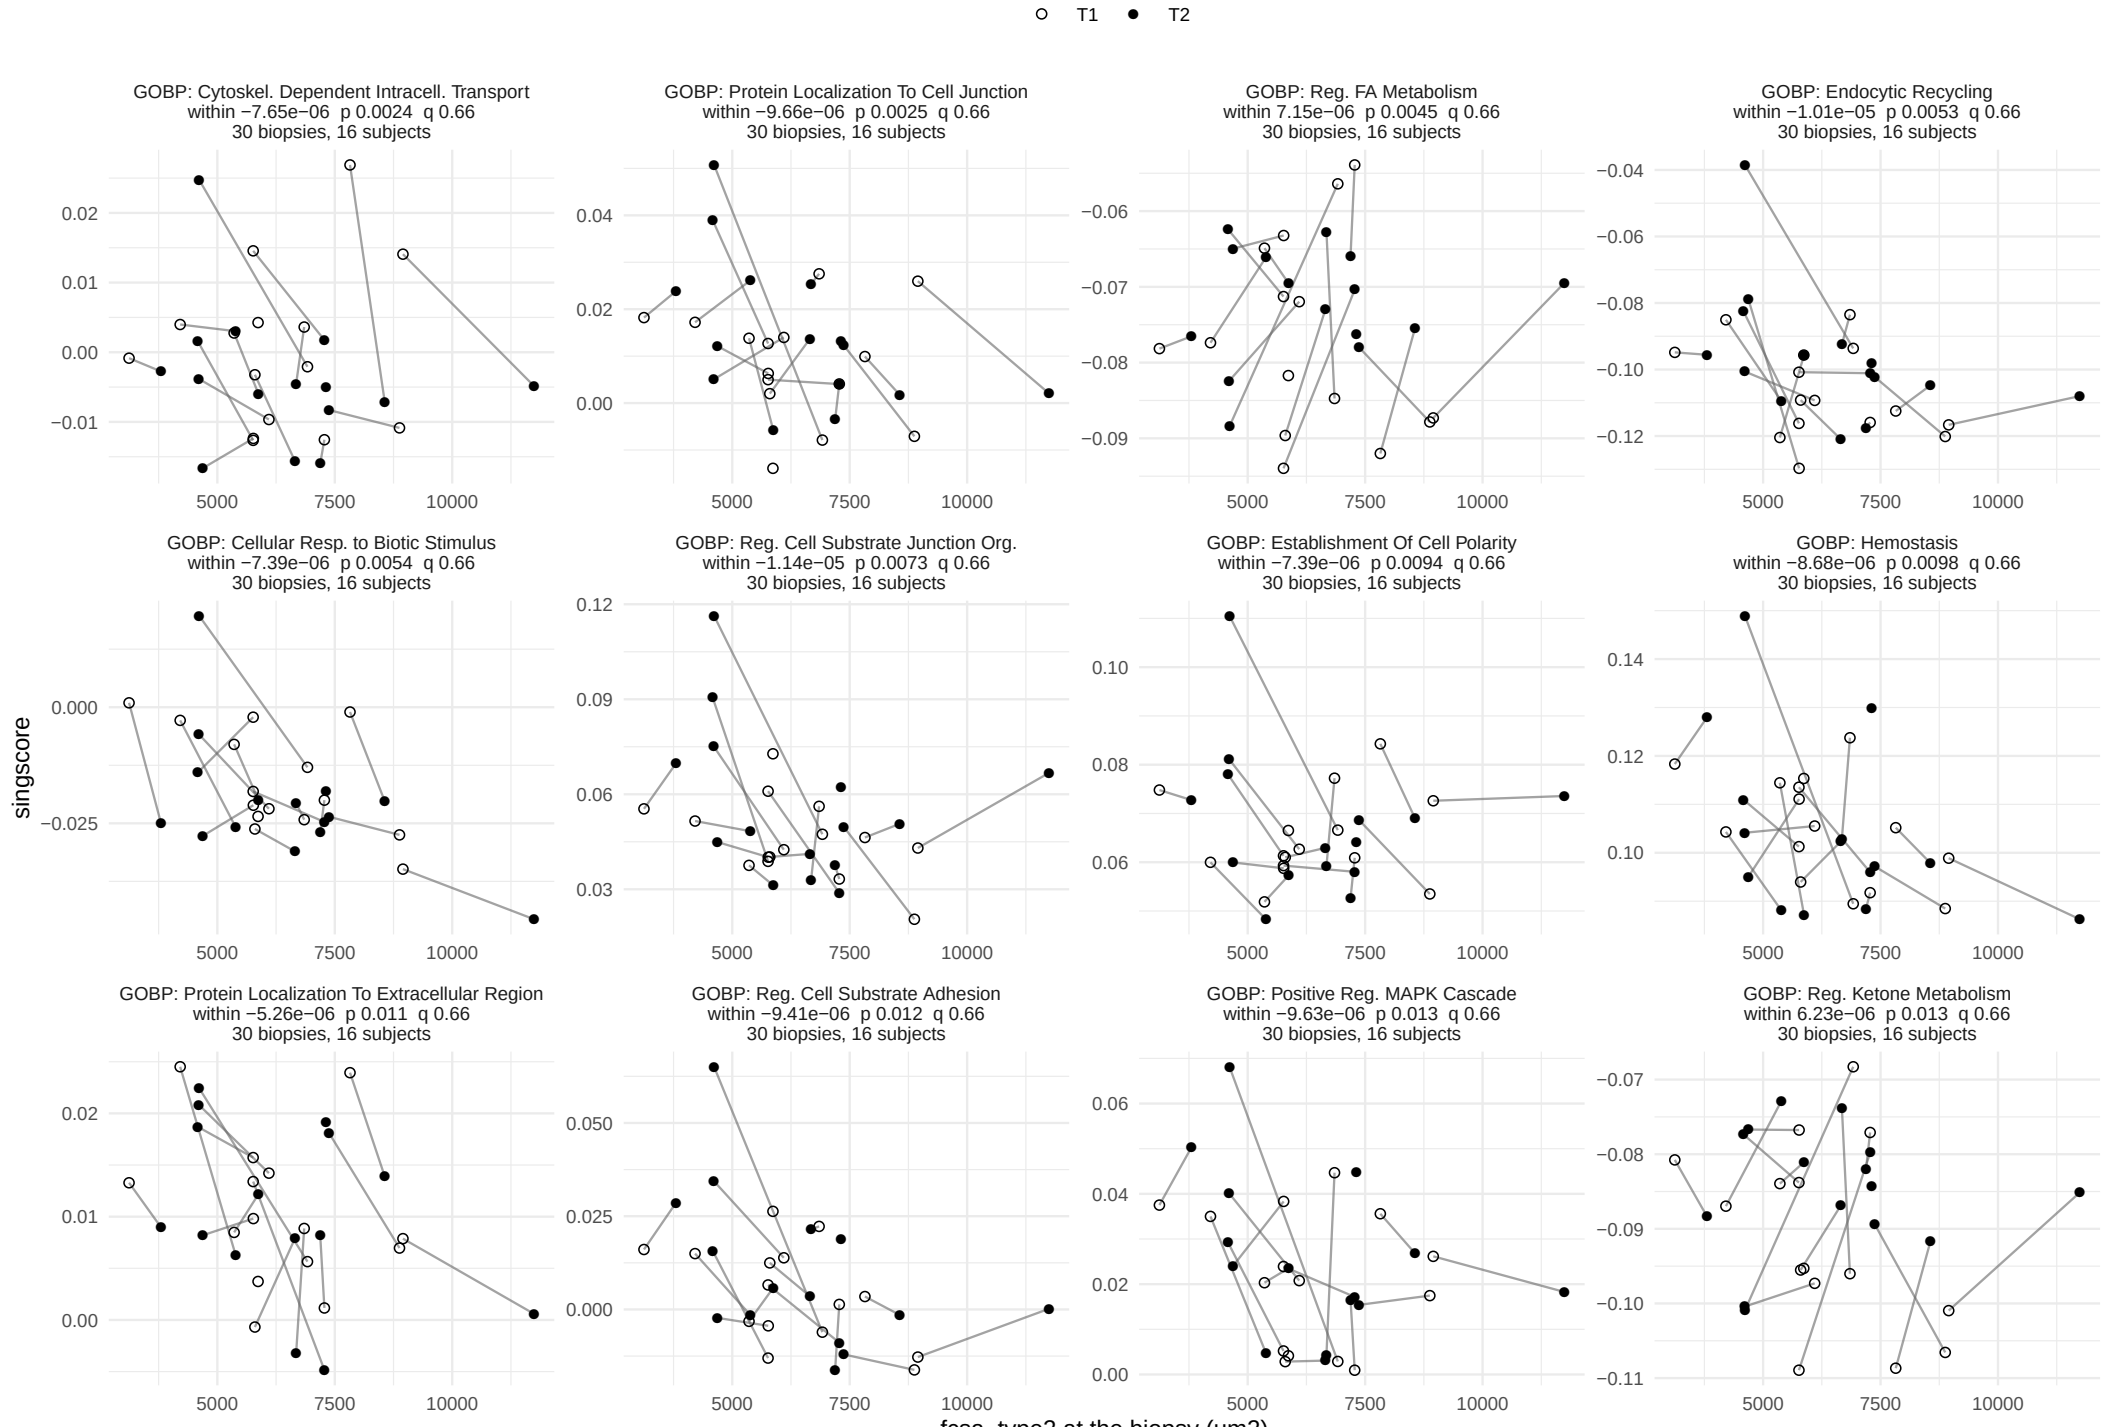

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/02_sets.xlsx, model.

fcsa_type2, within−person term


88 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 2 of 8.

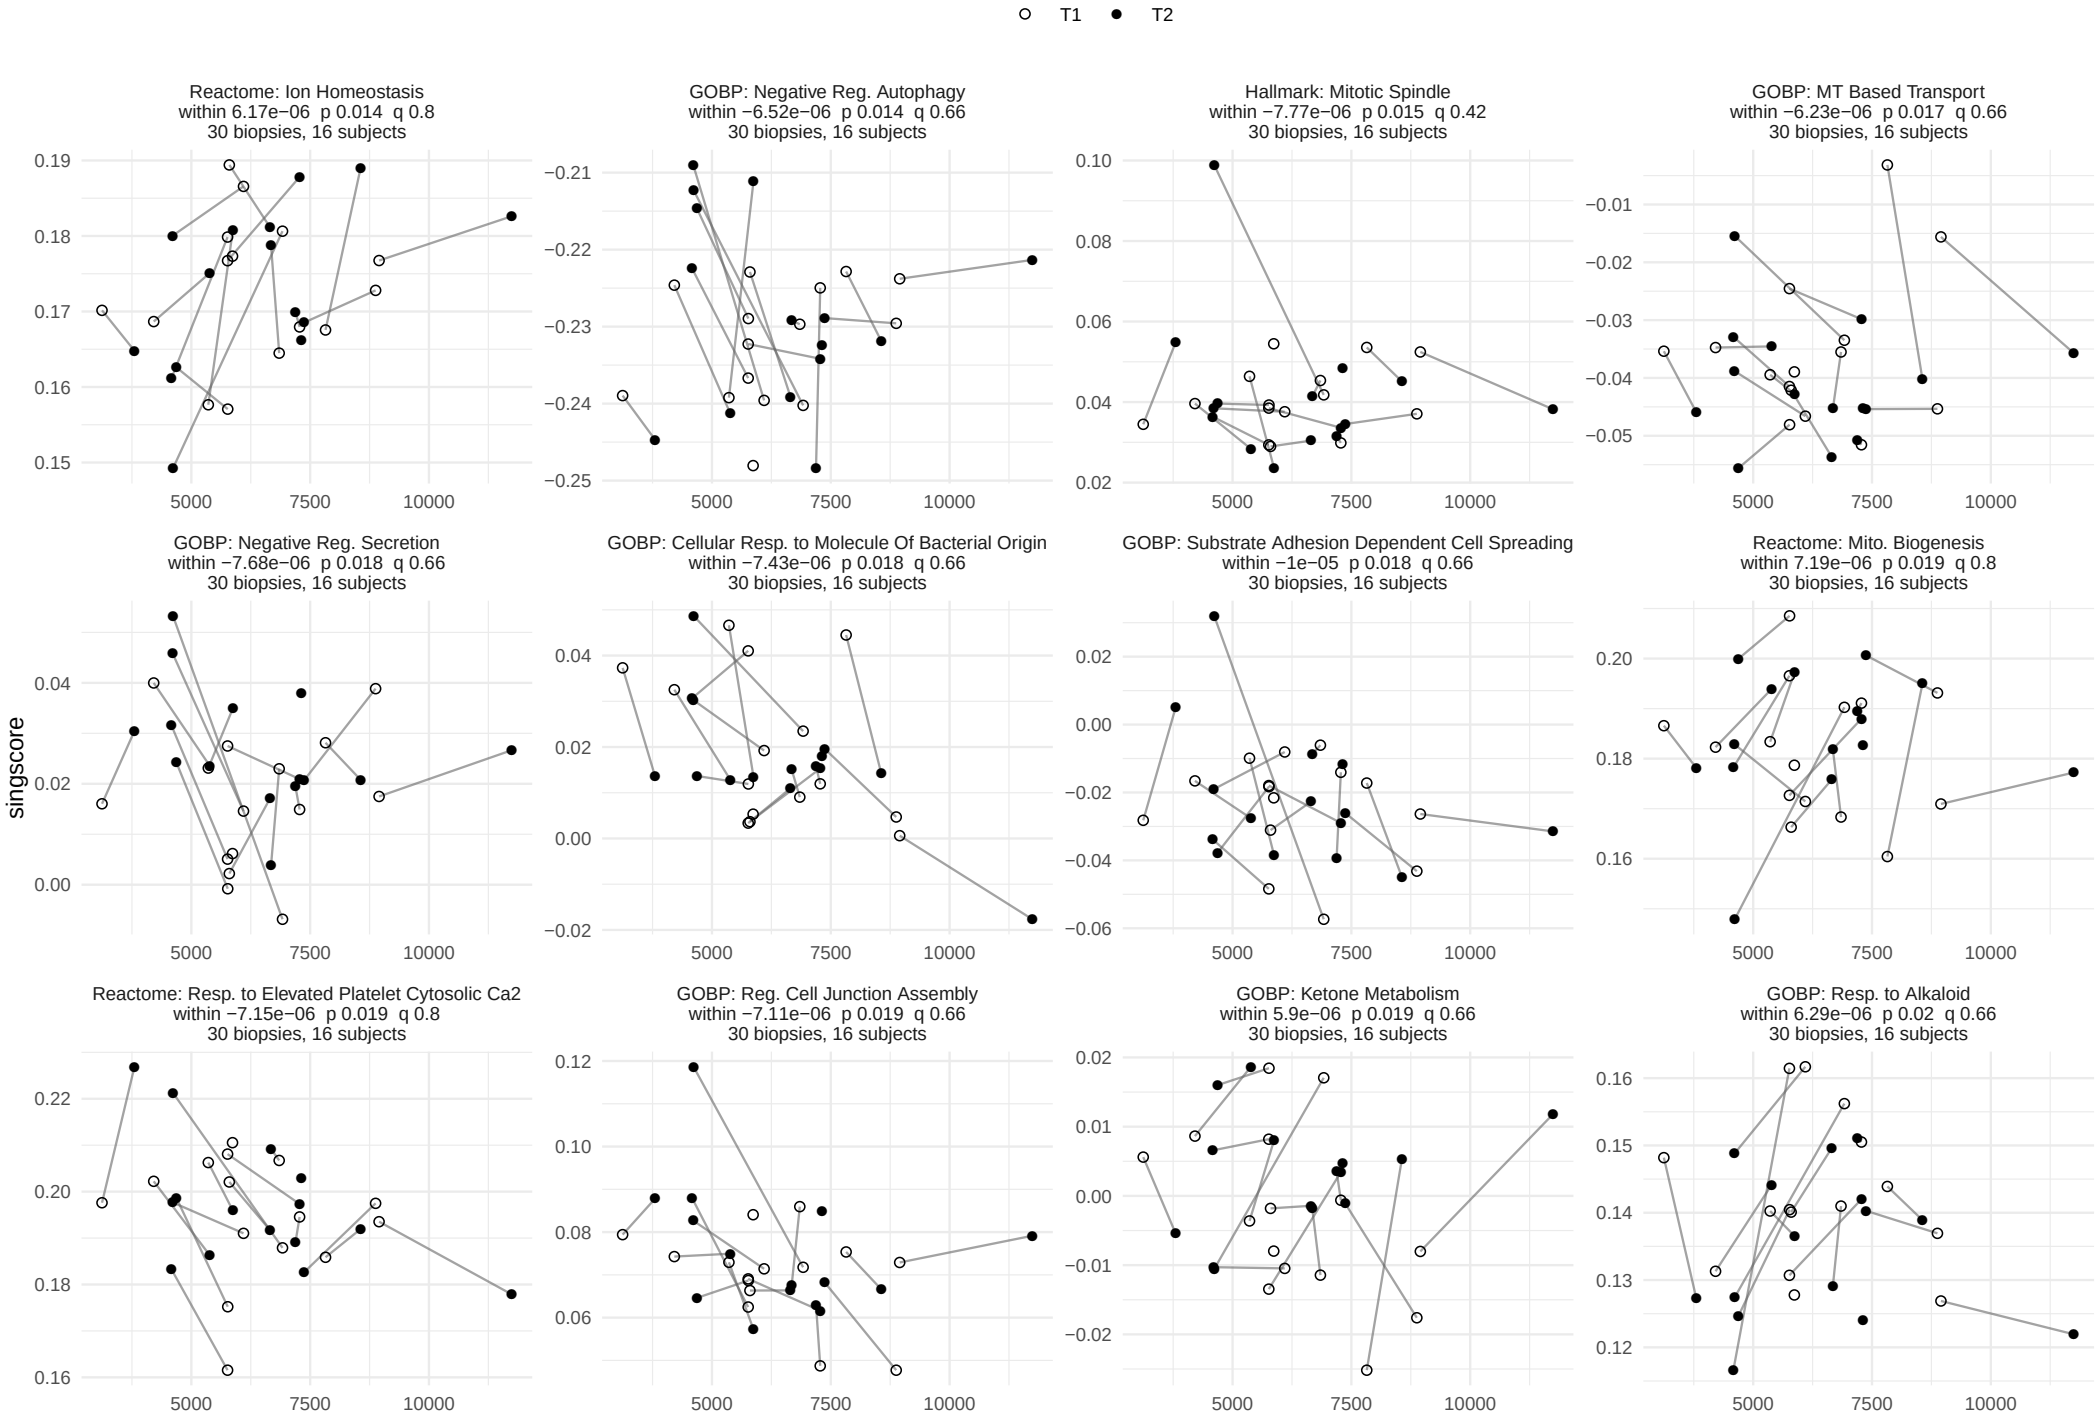

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/02_sets.xlsx, model.

fcsa_type2, within−person term


88 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 3 of 8.

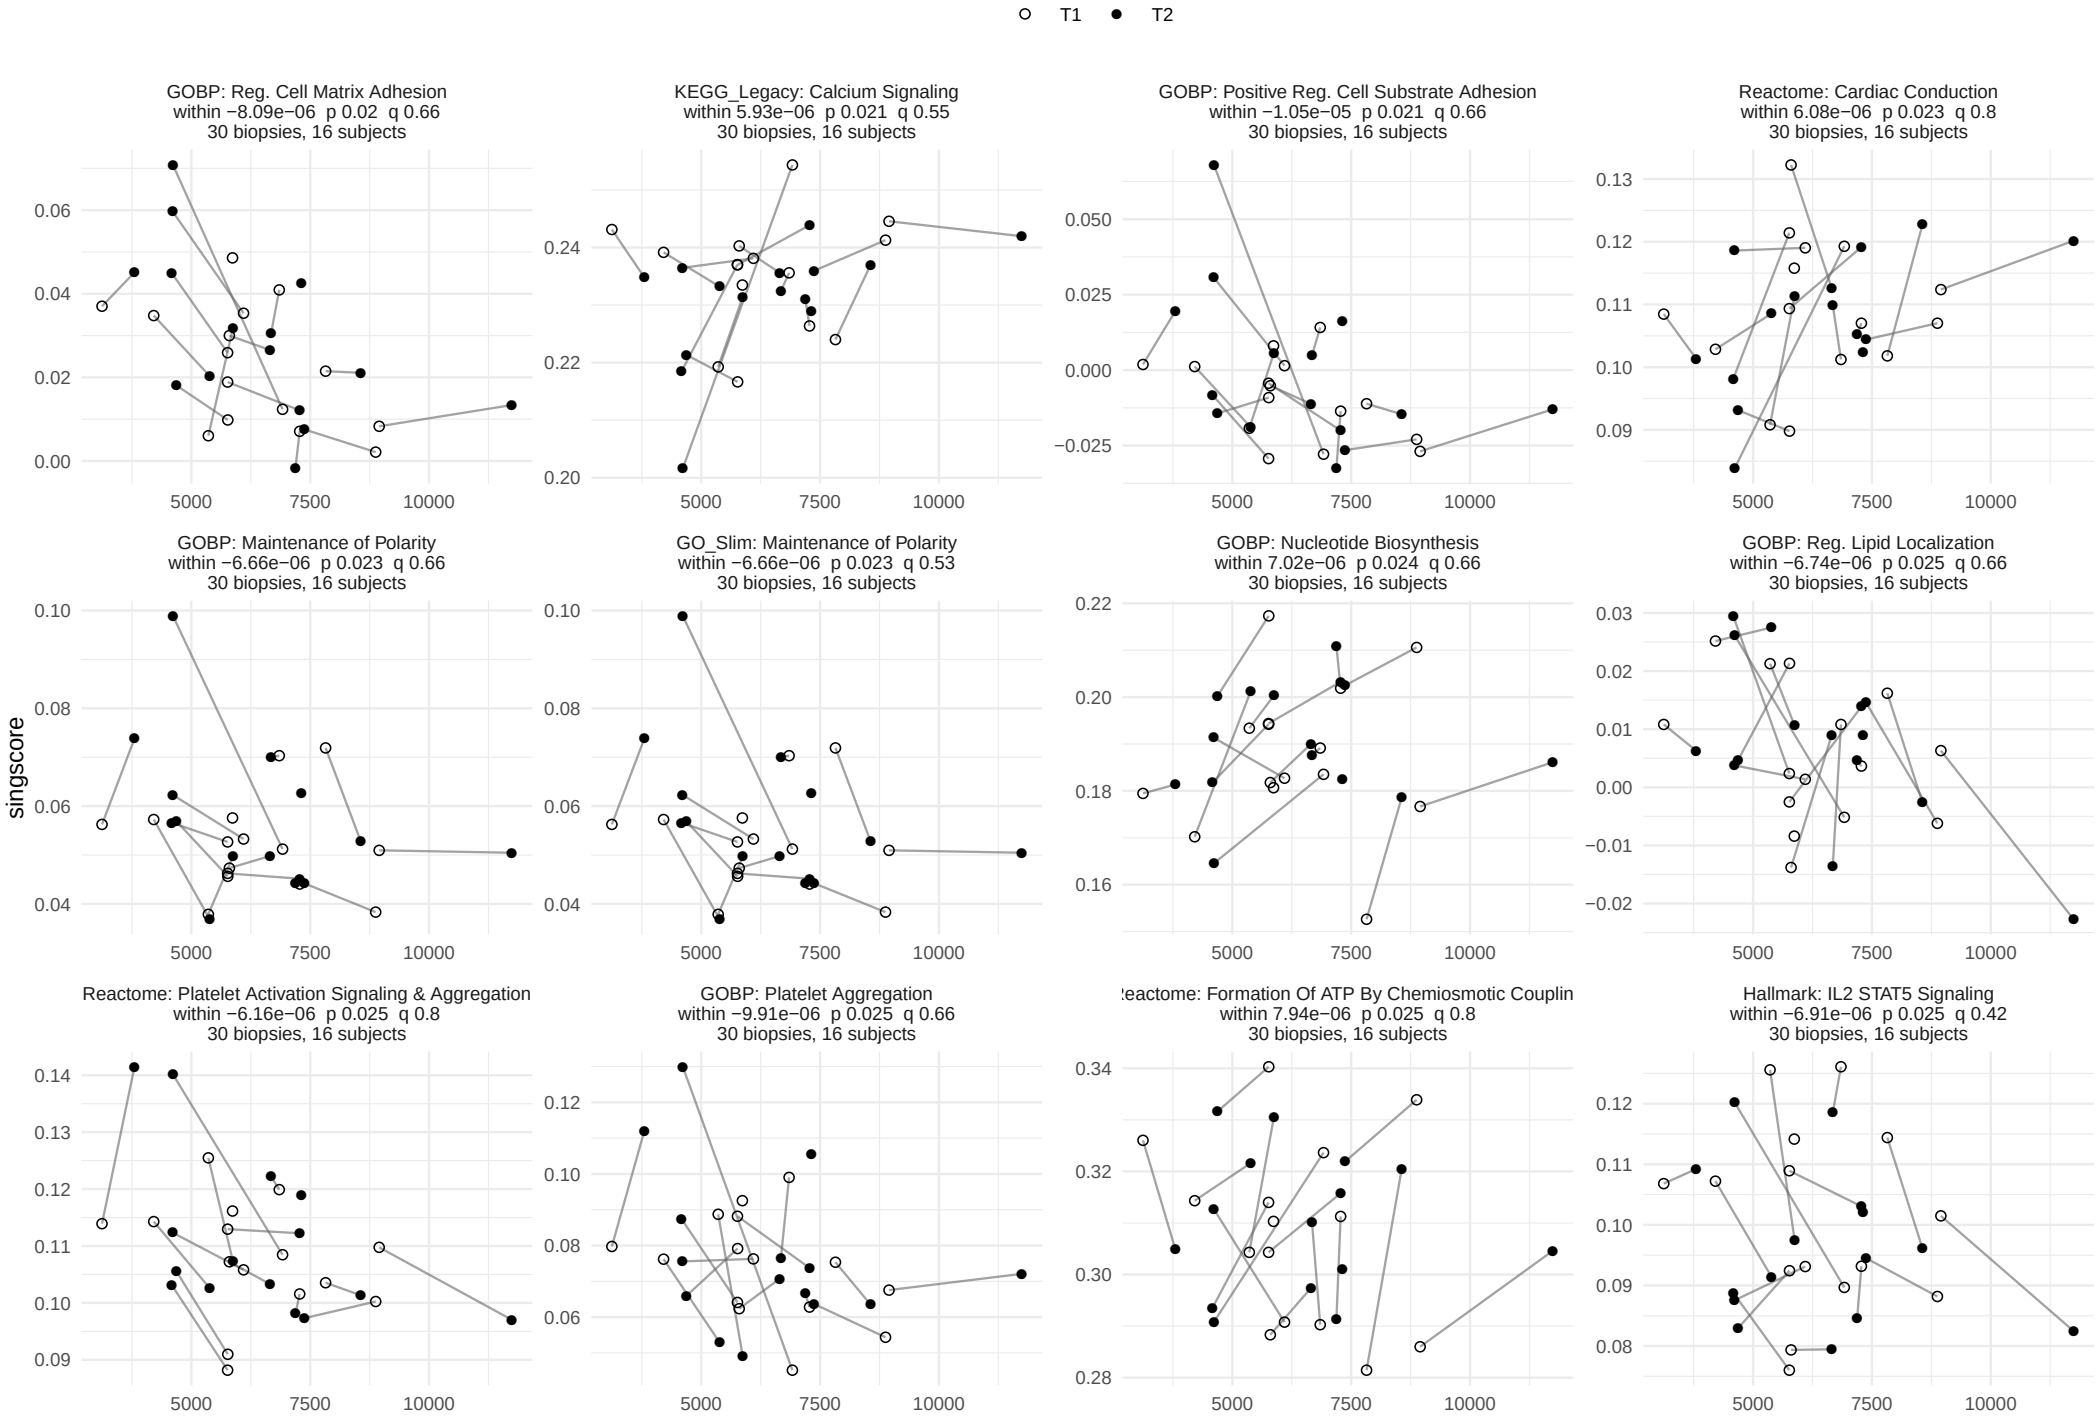

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/02_sets.xlsx, model.

fcsa_type2, within−person term


88 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 4 of 8.

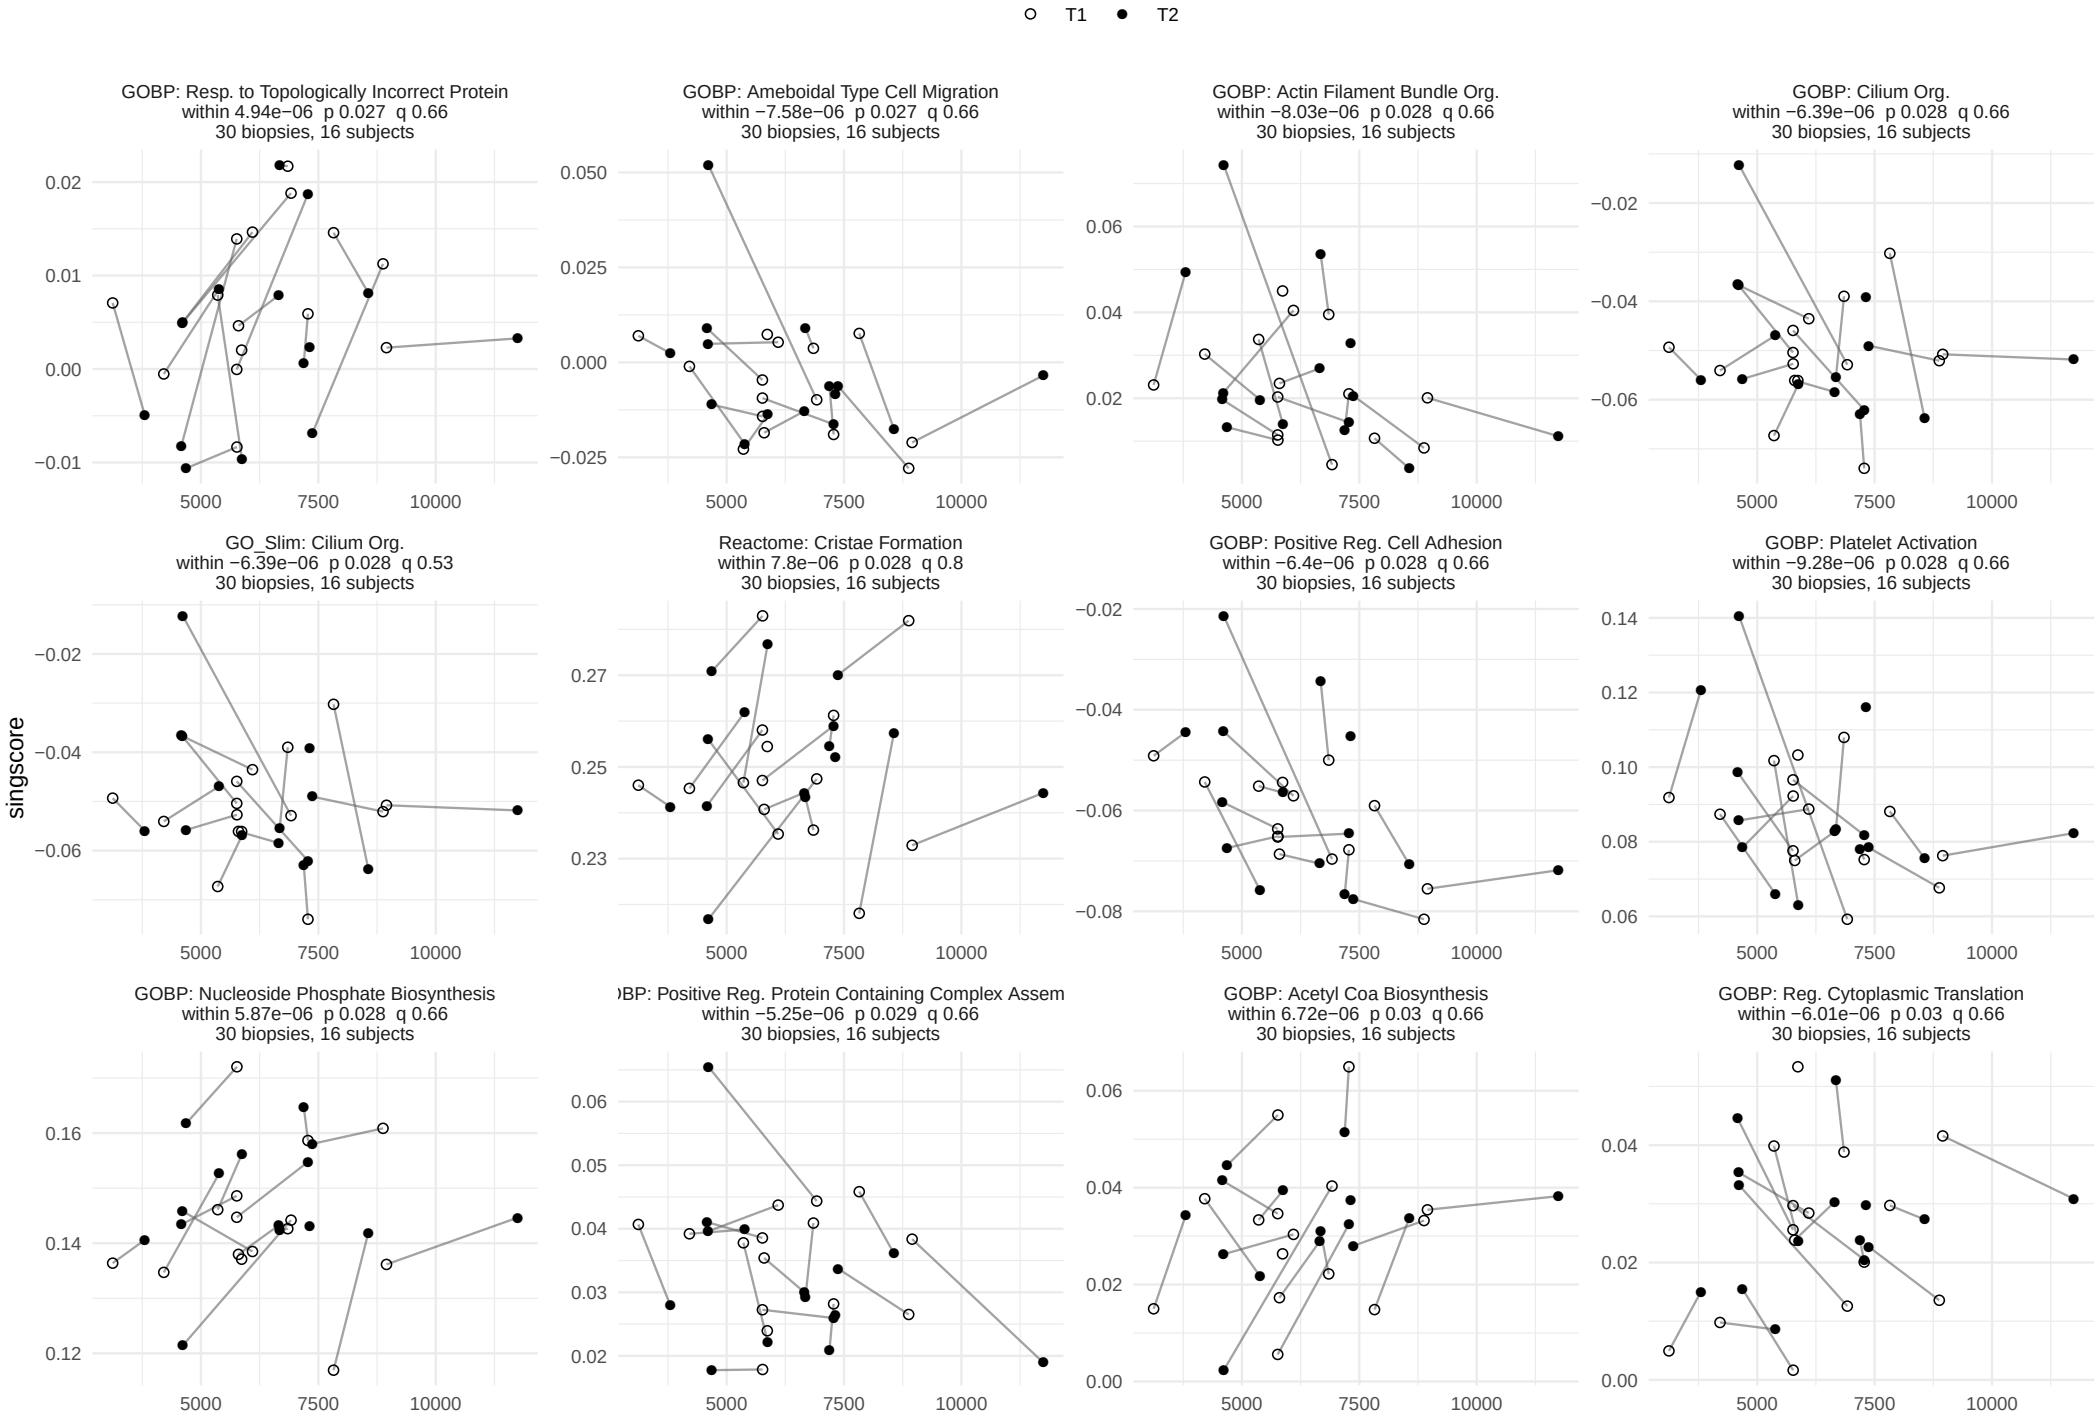

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/02_sets.xlsx, model.

fcsa_type2, within−person term


88 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 5 of 8.

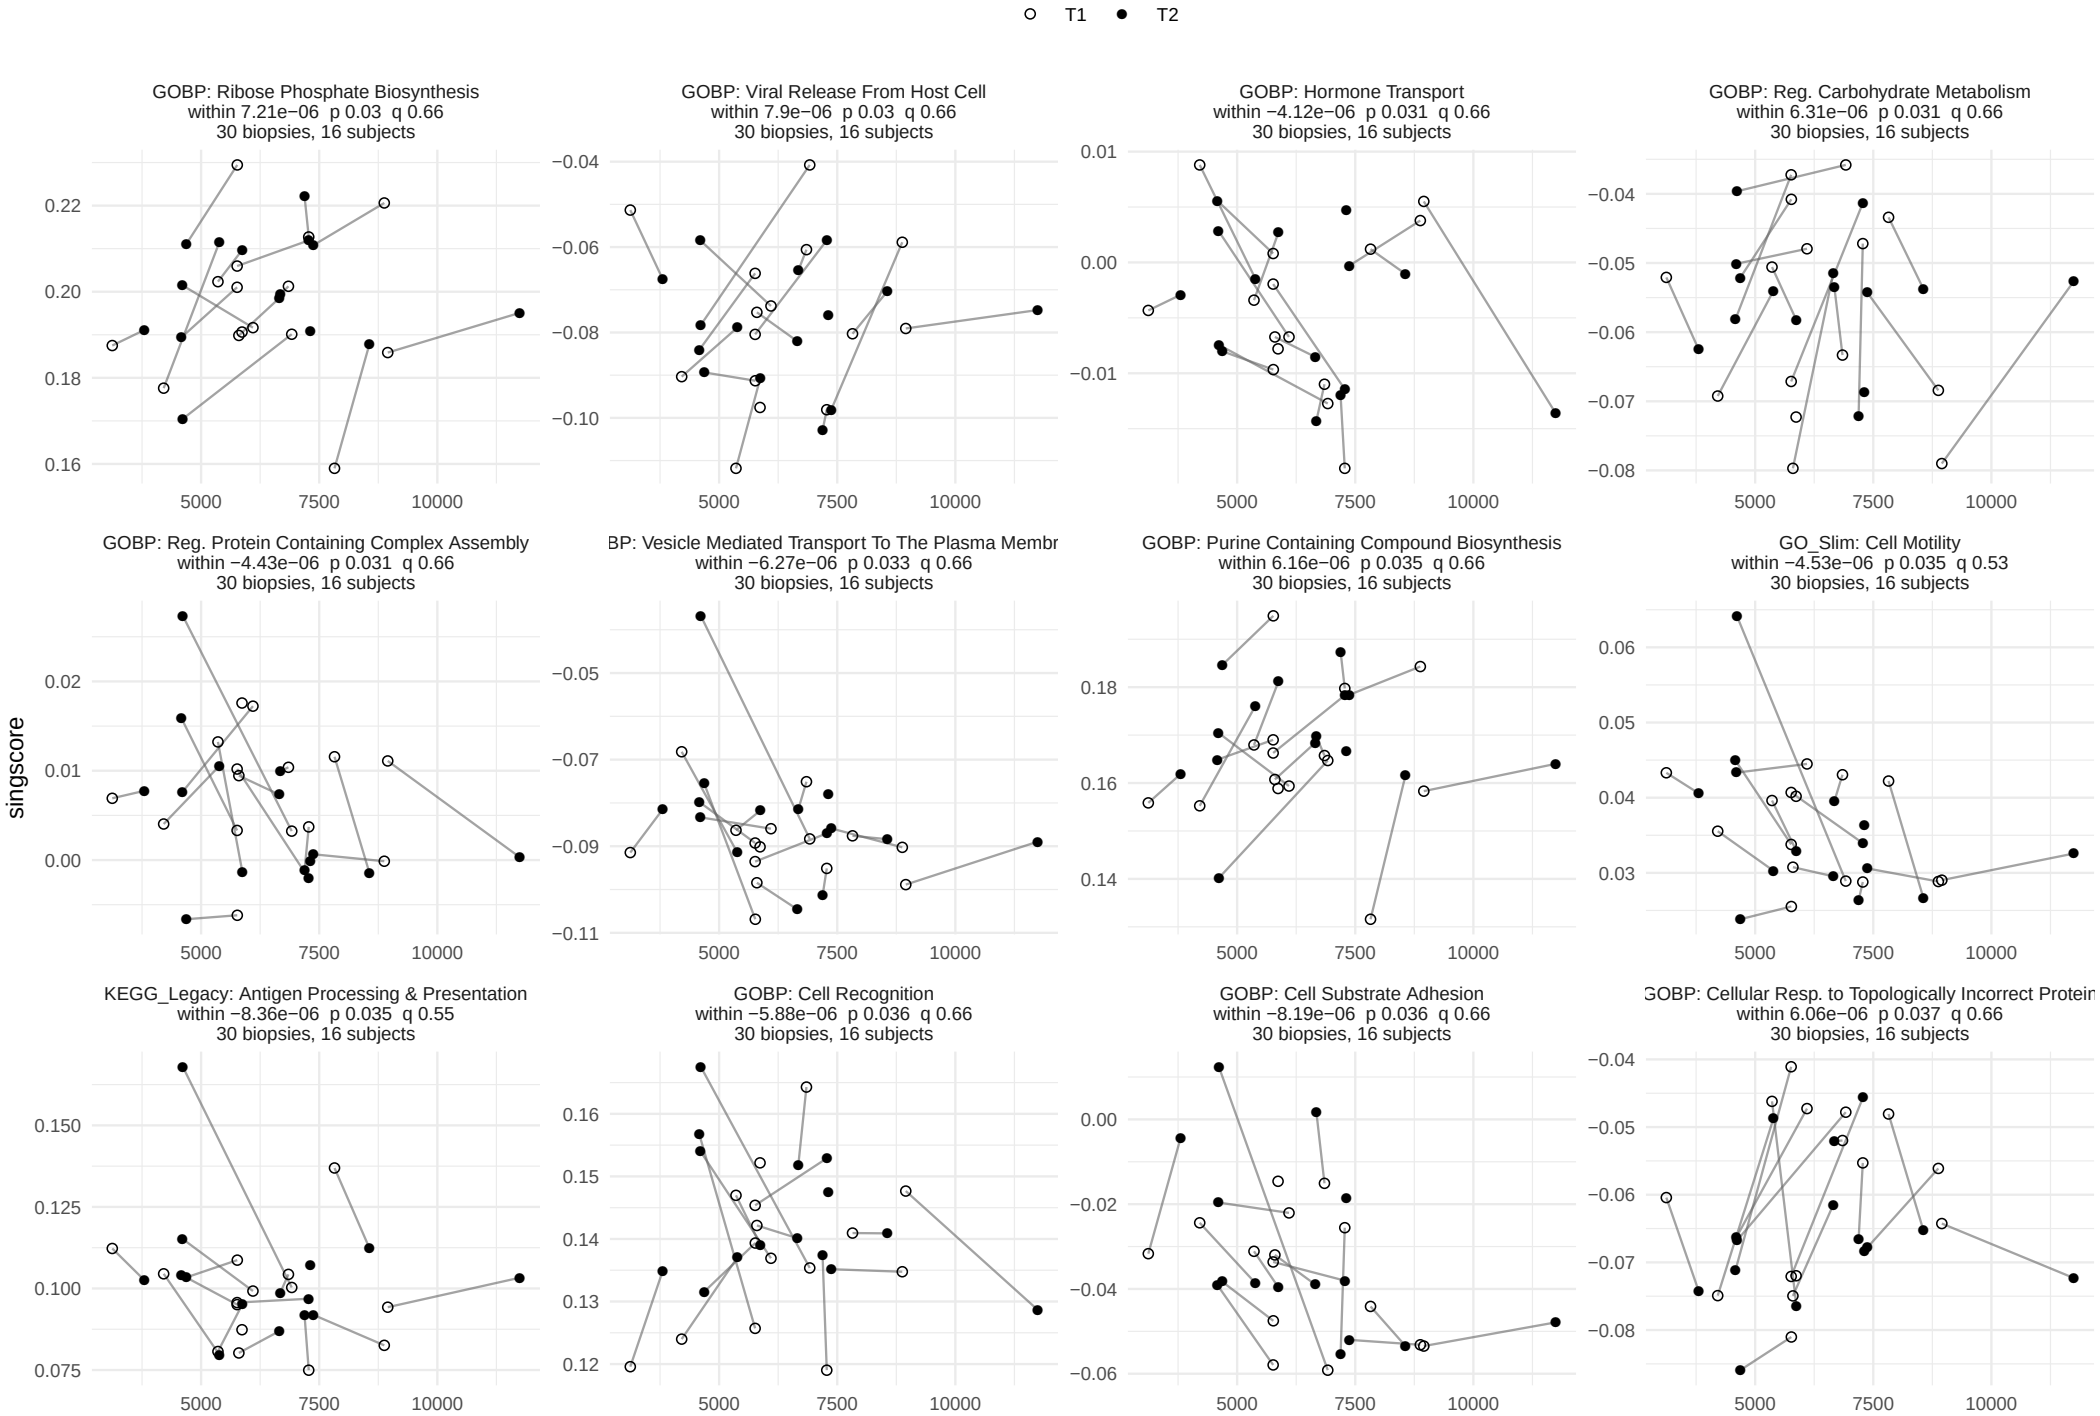

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/02_sets.xlsx, model.

fcsa_type2, within−person term


88 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 6 of 8.

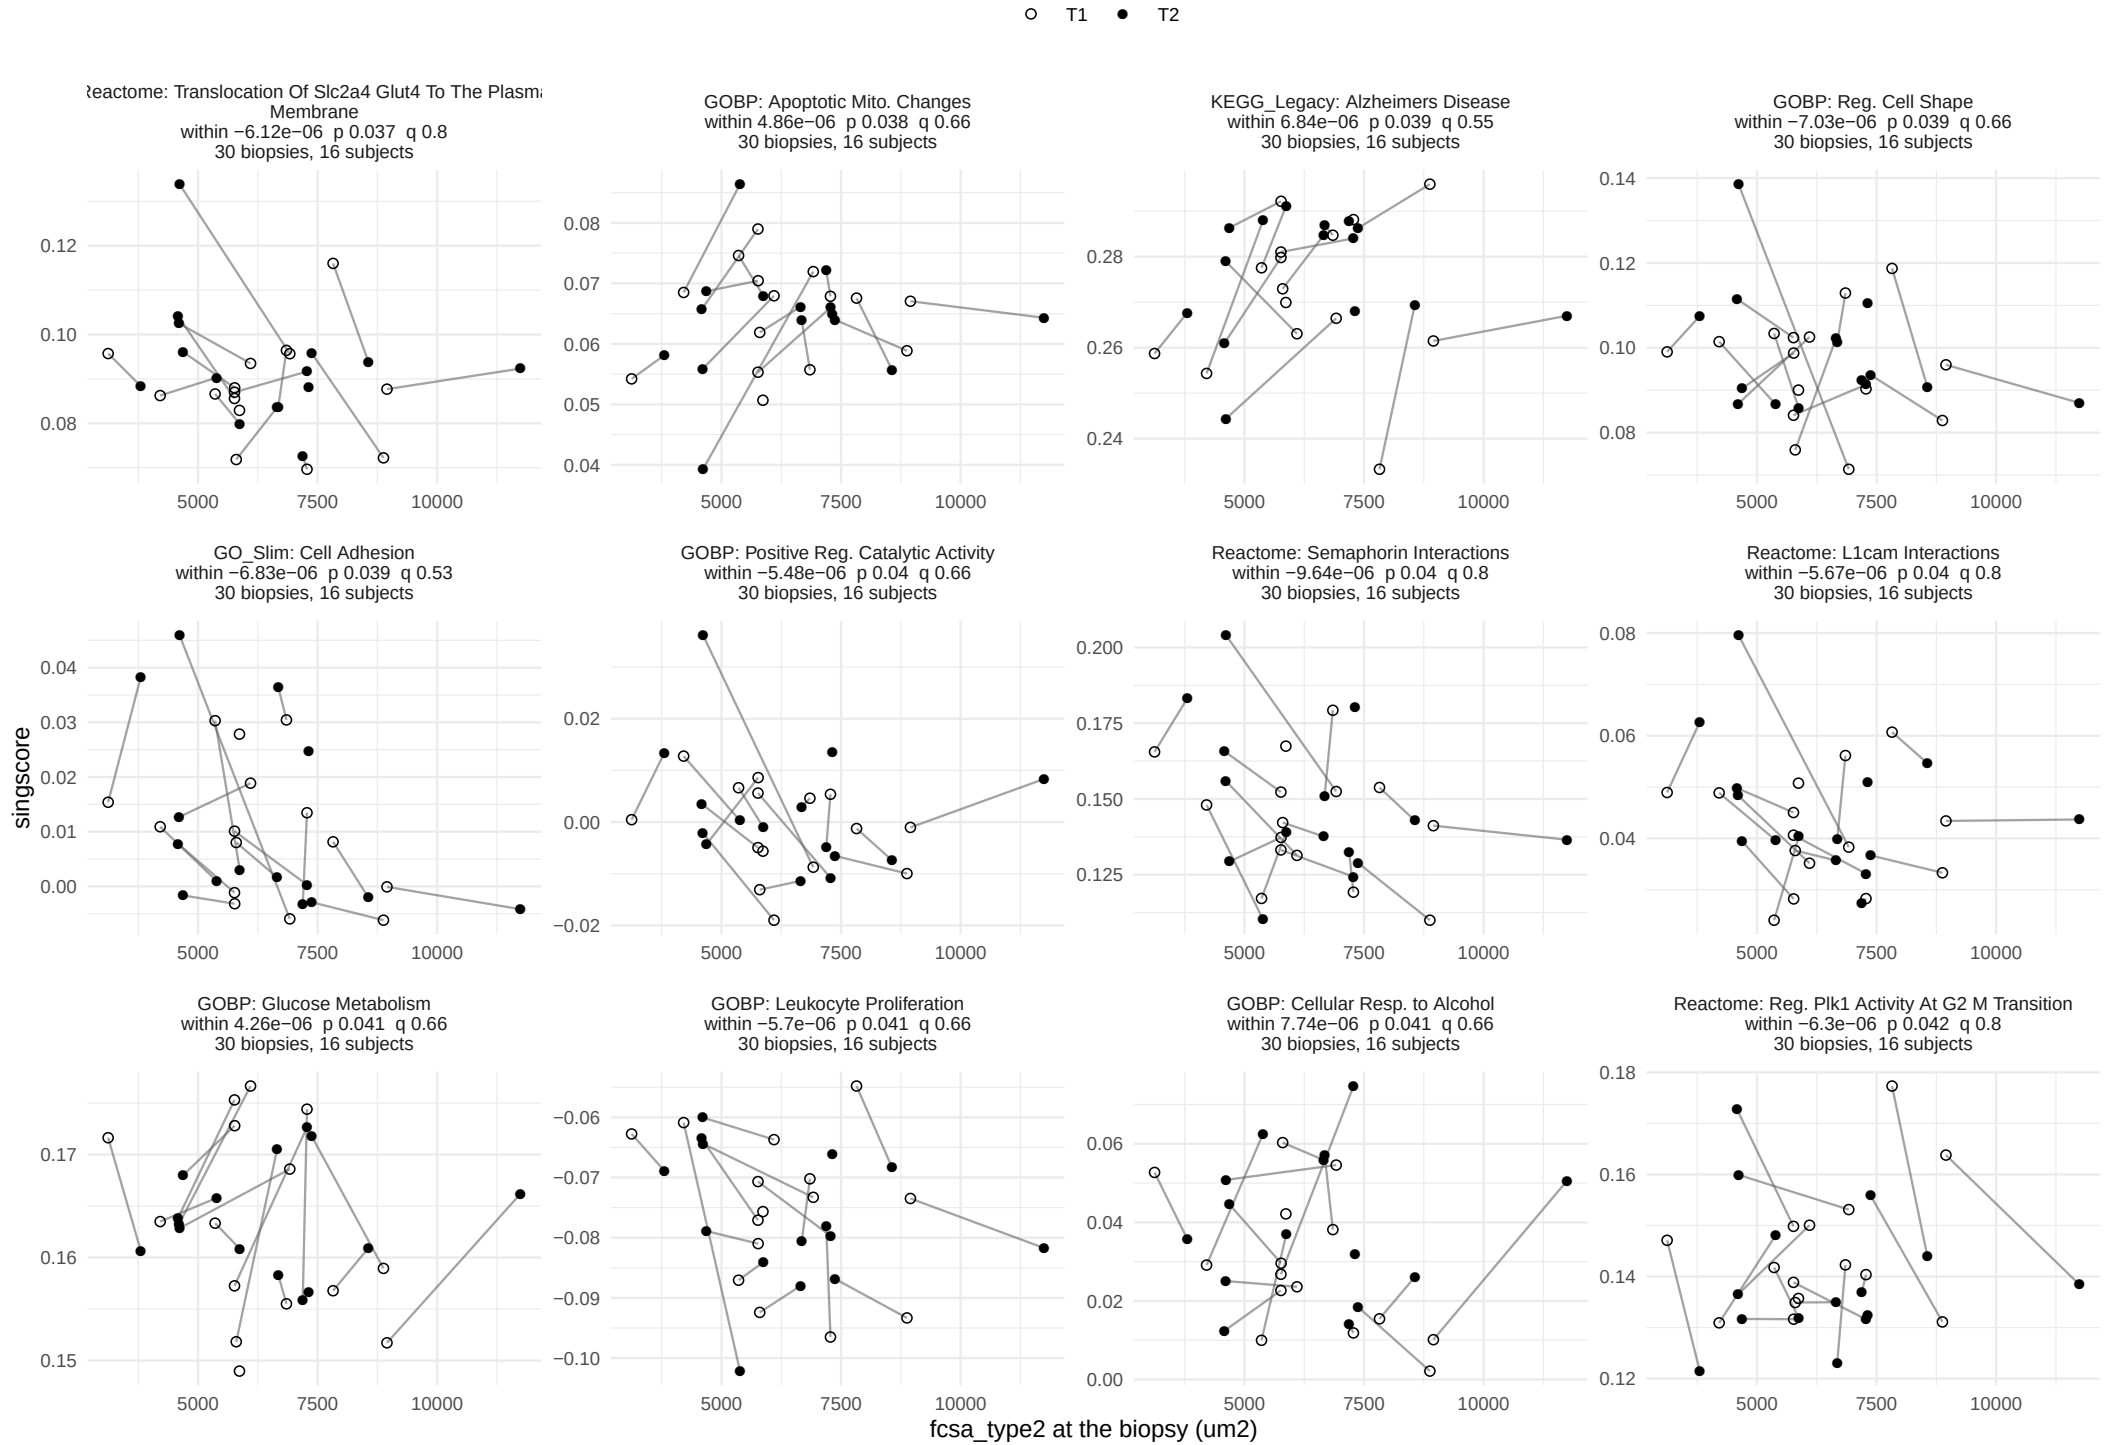

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/02_sets.xlsx, model.

fcsa_type2, within−person term


88 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 7 of 8.

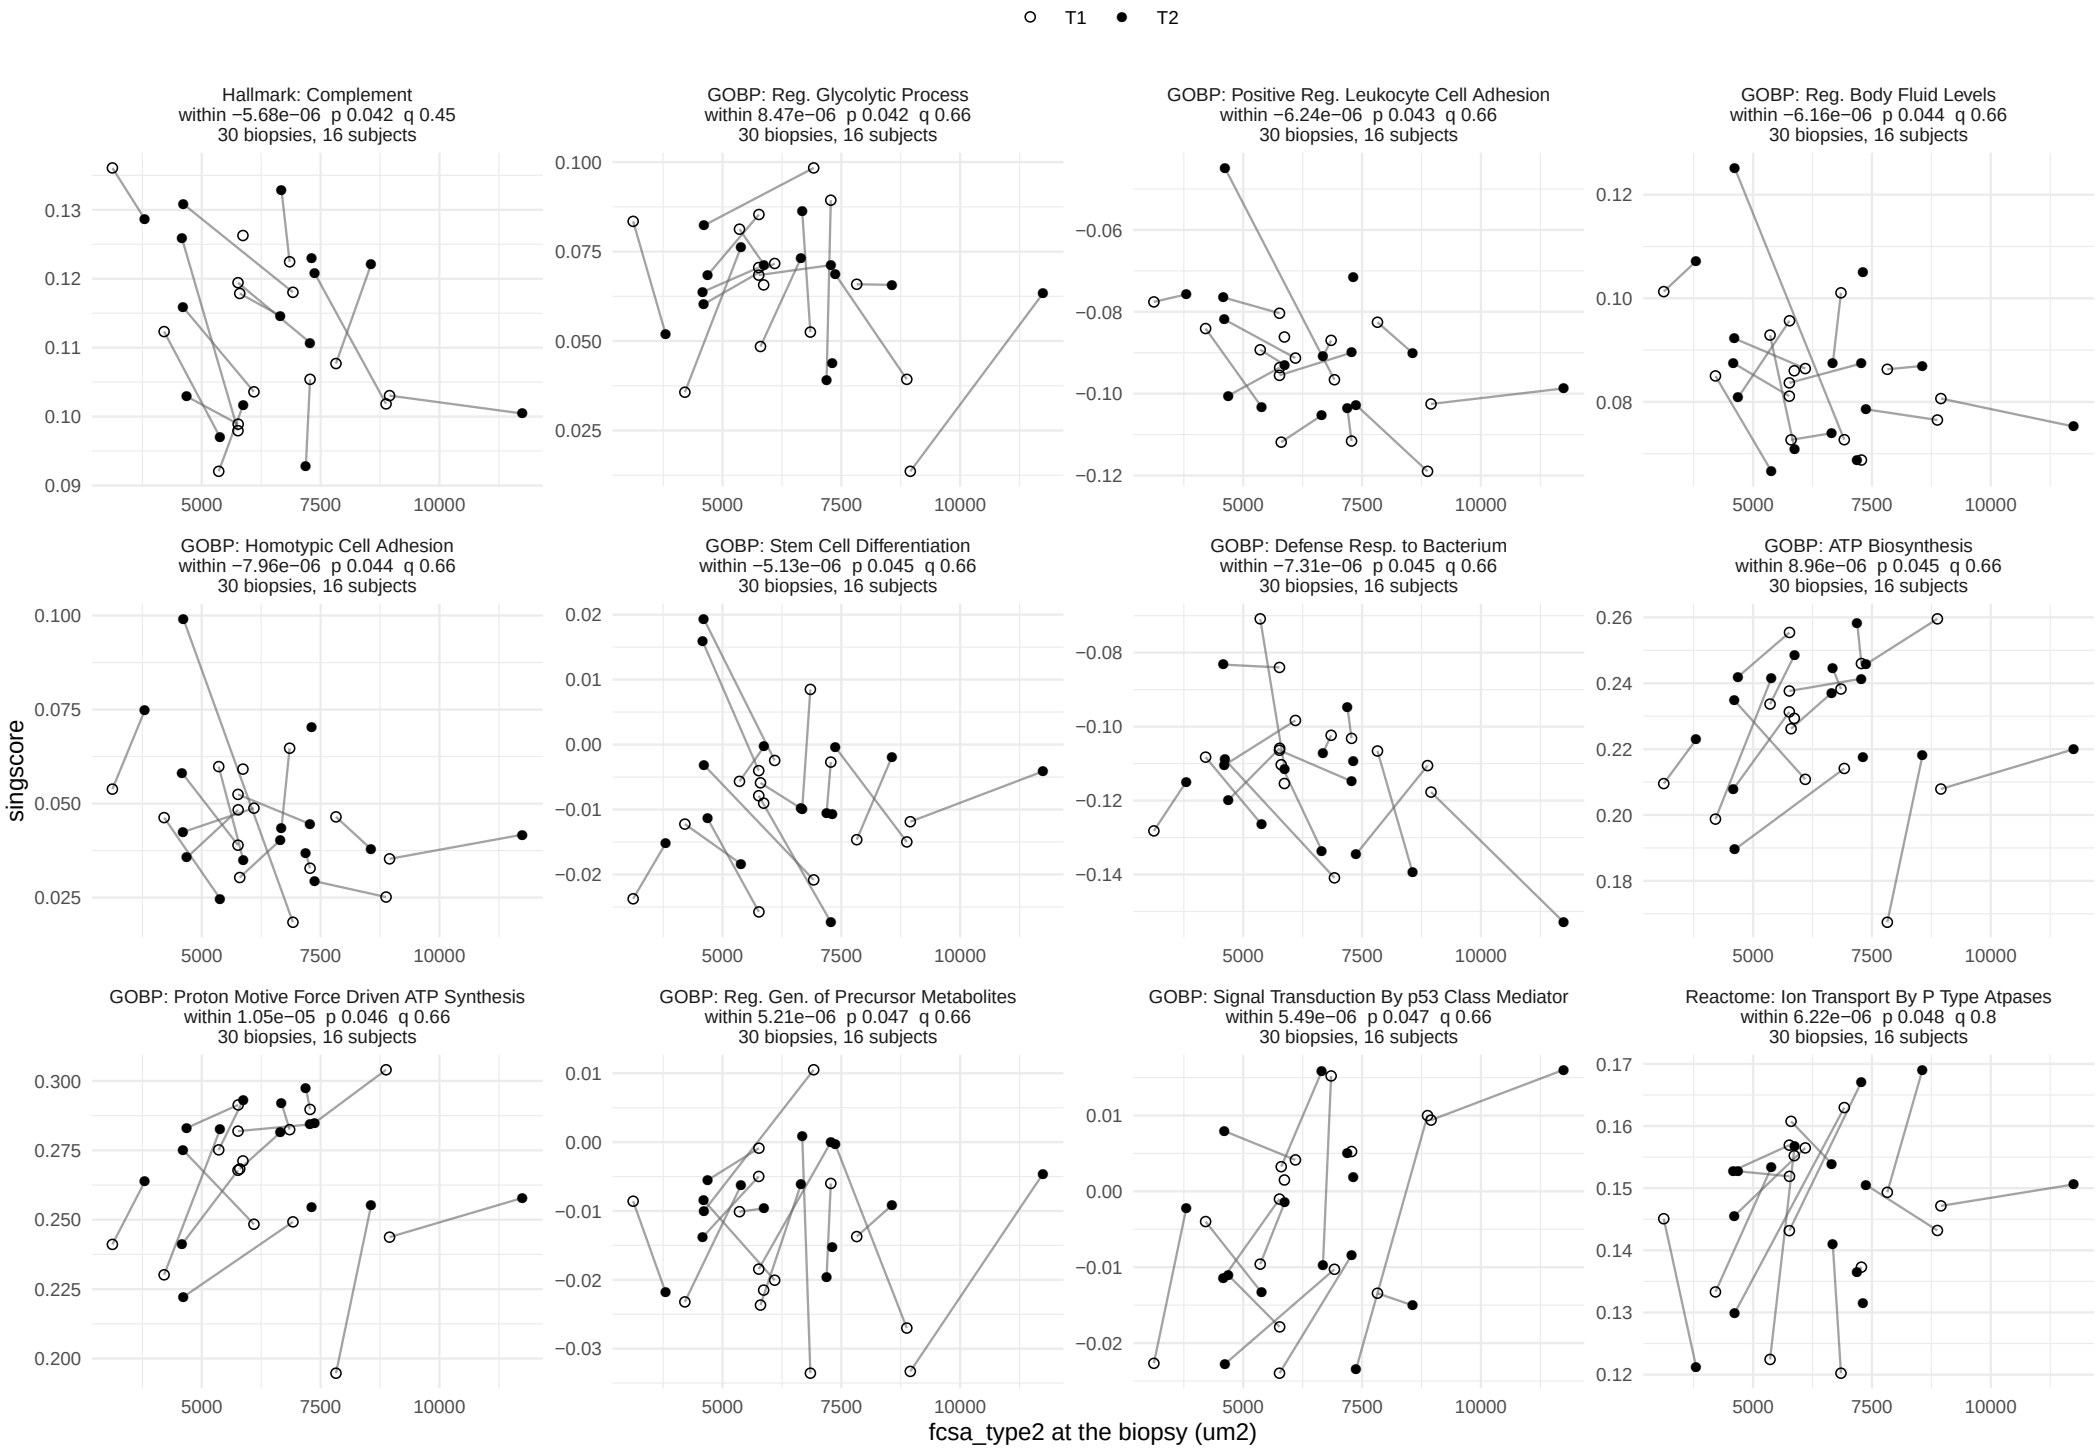

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/02_sets.xlsx, model.

fcsa_type2, within−person term


88 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 8 of 8.

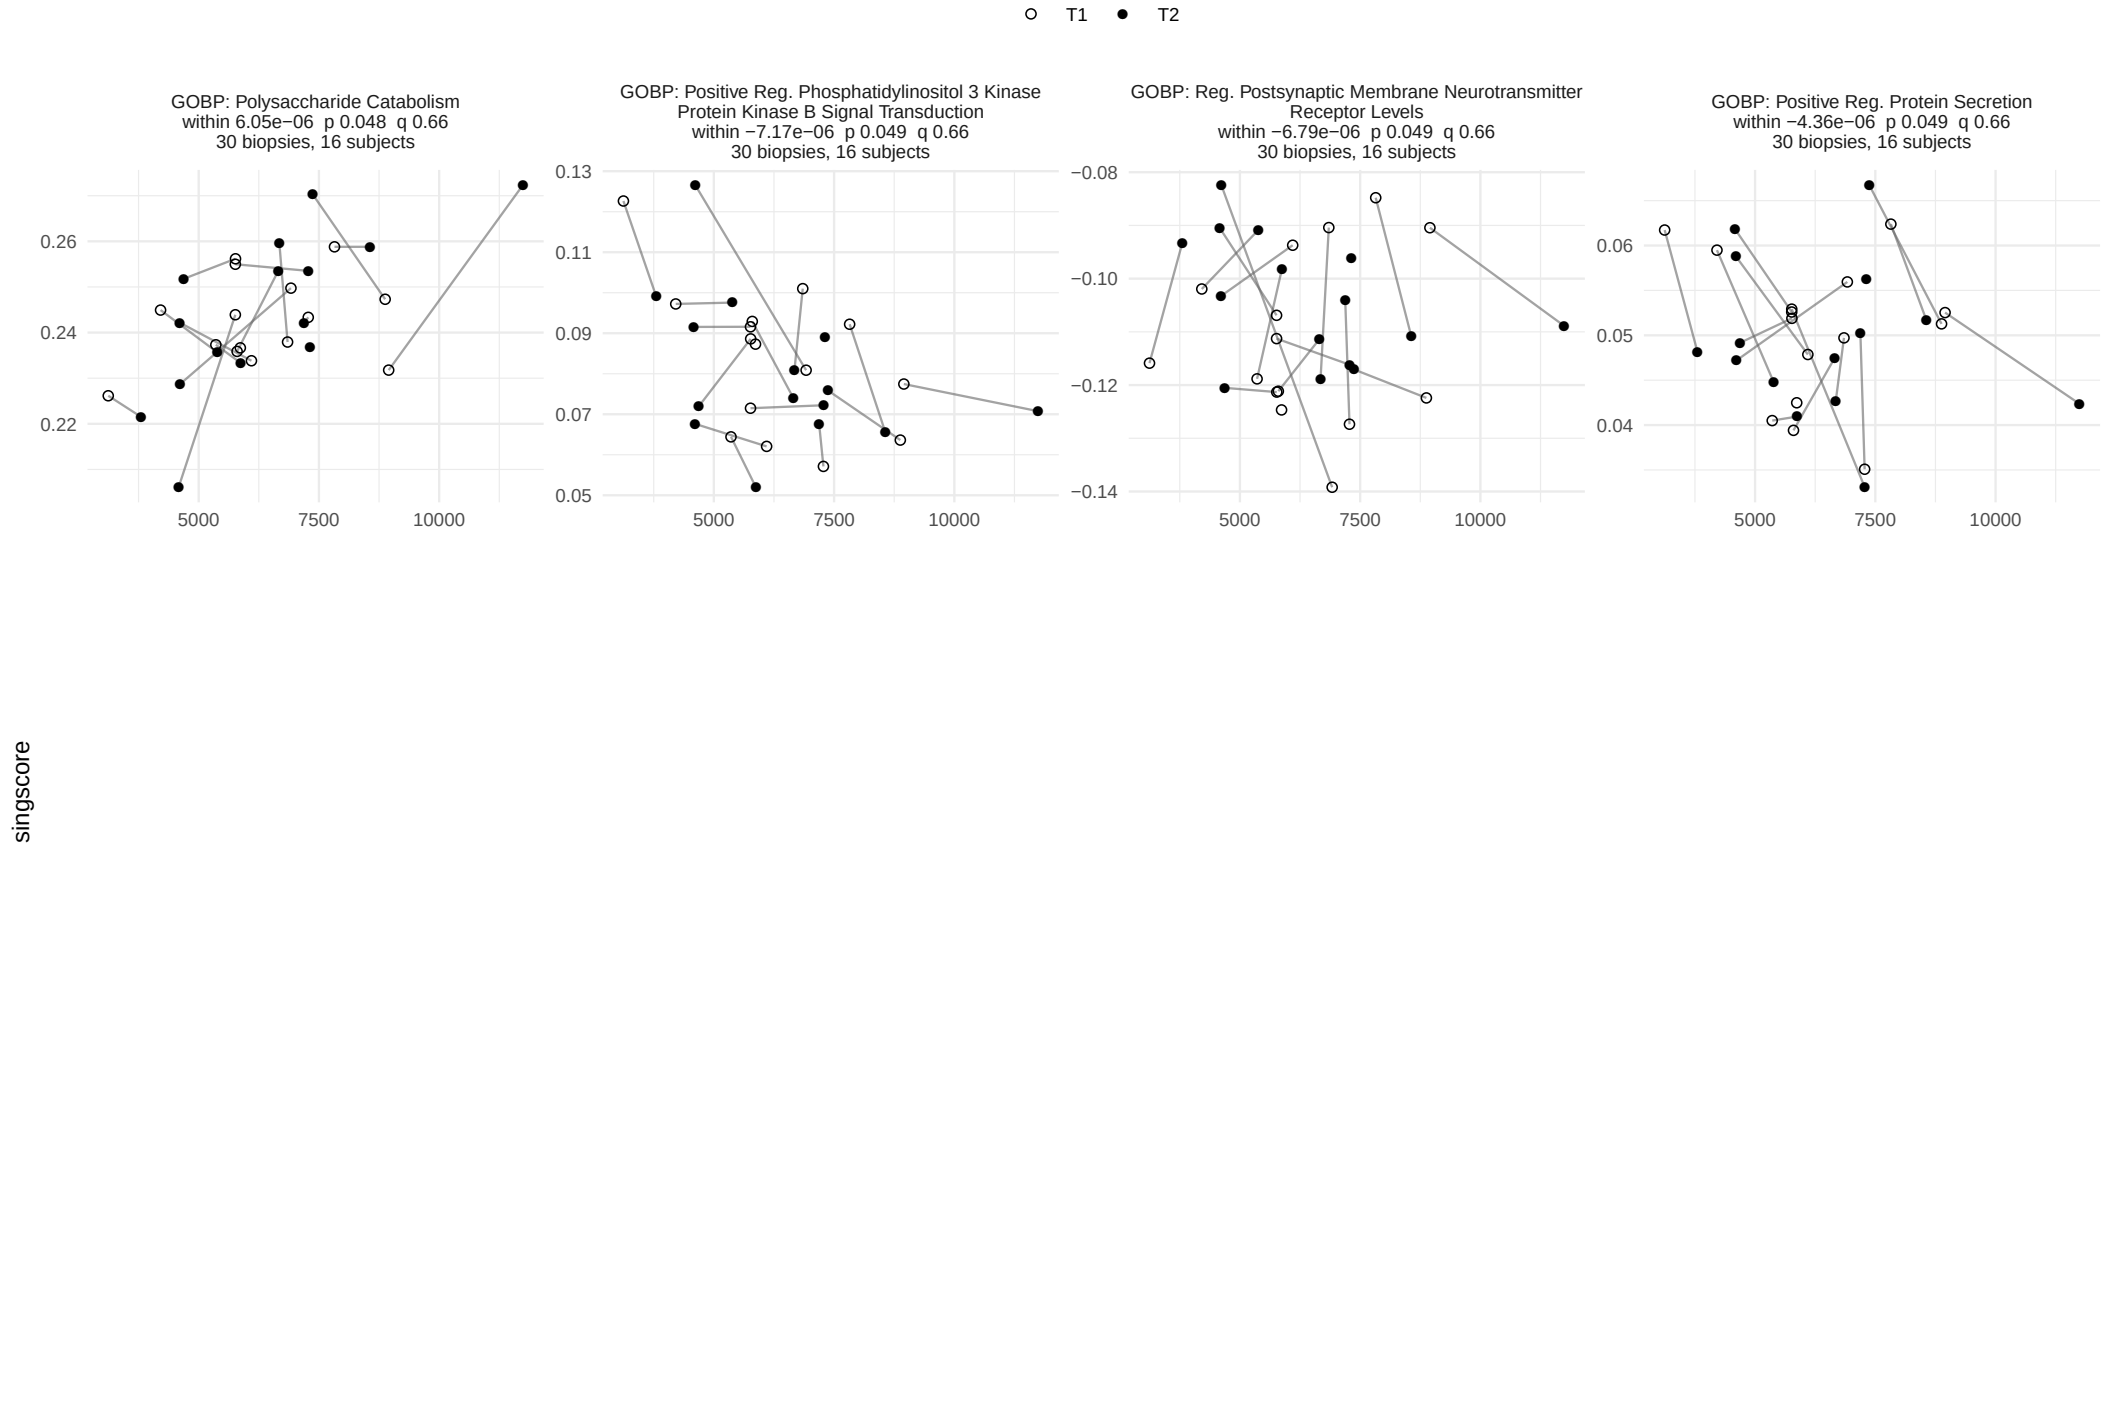

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/02_sets.xlsx, model.

fcsa_type2, between−person term


87 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 1 of 8.

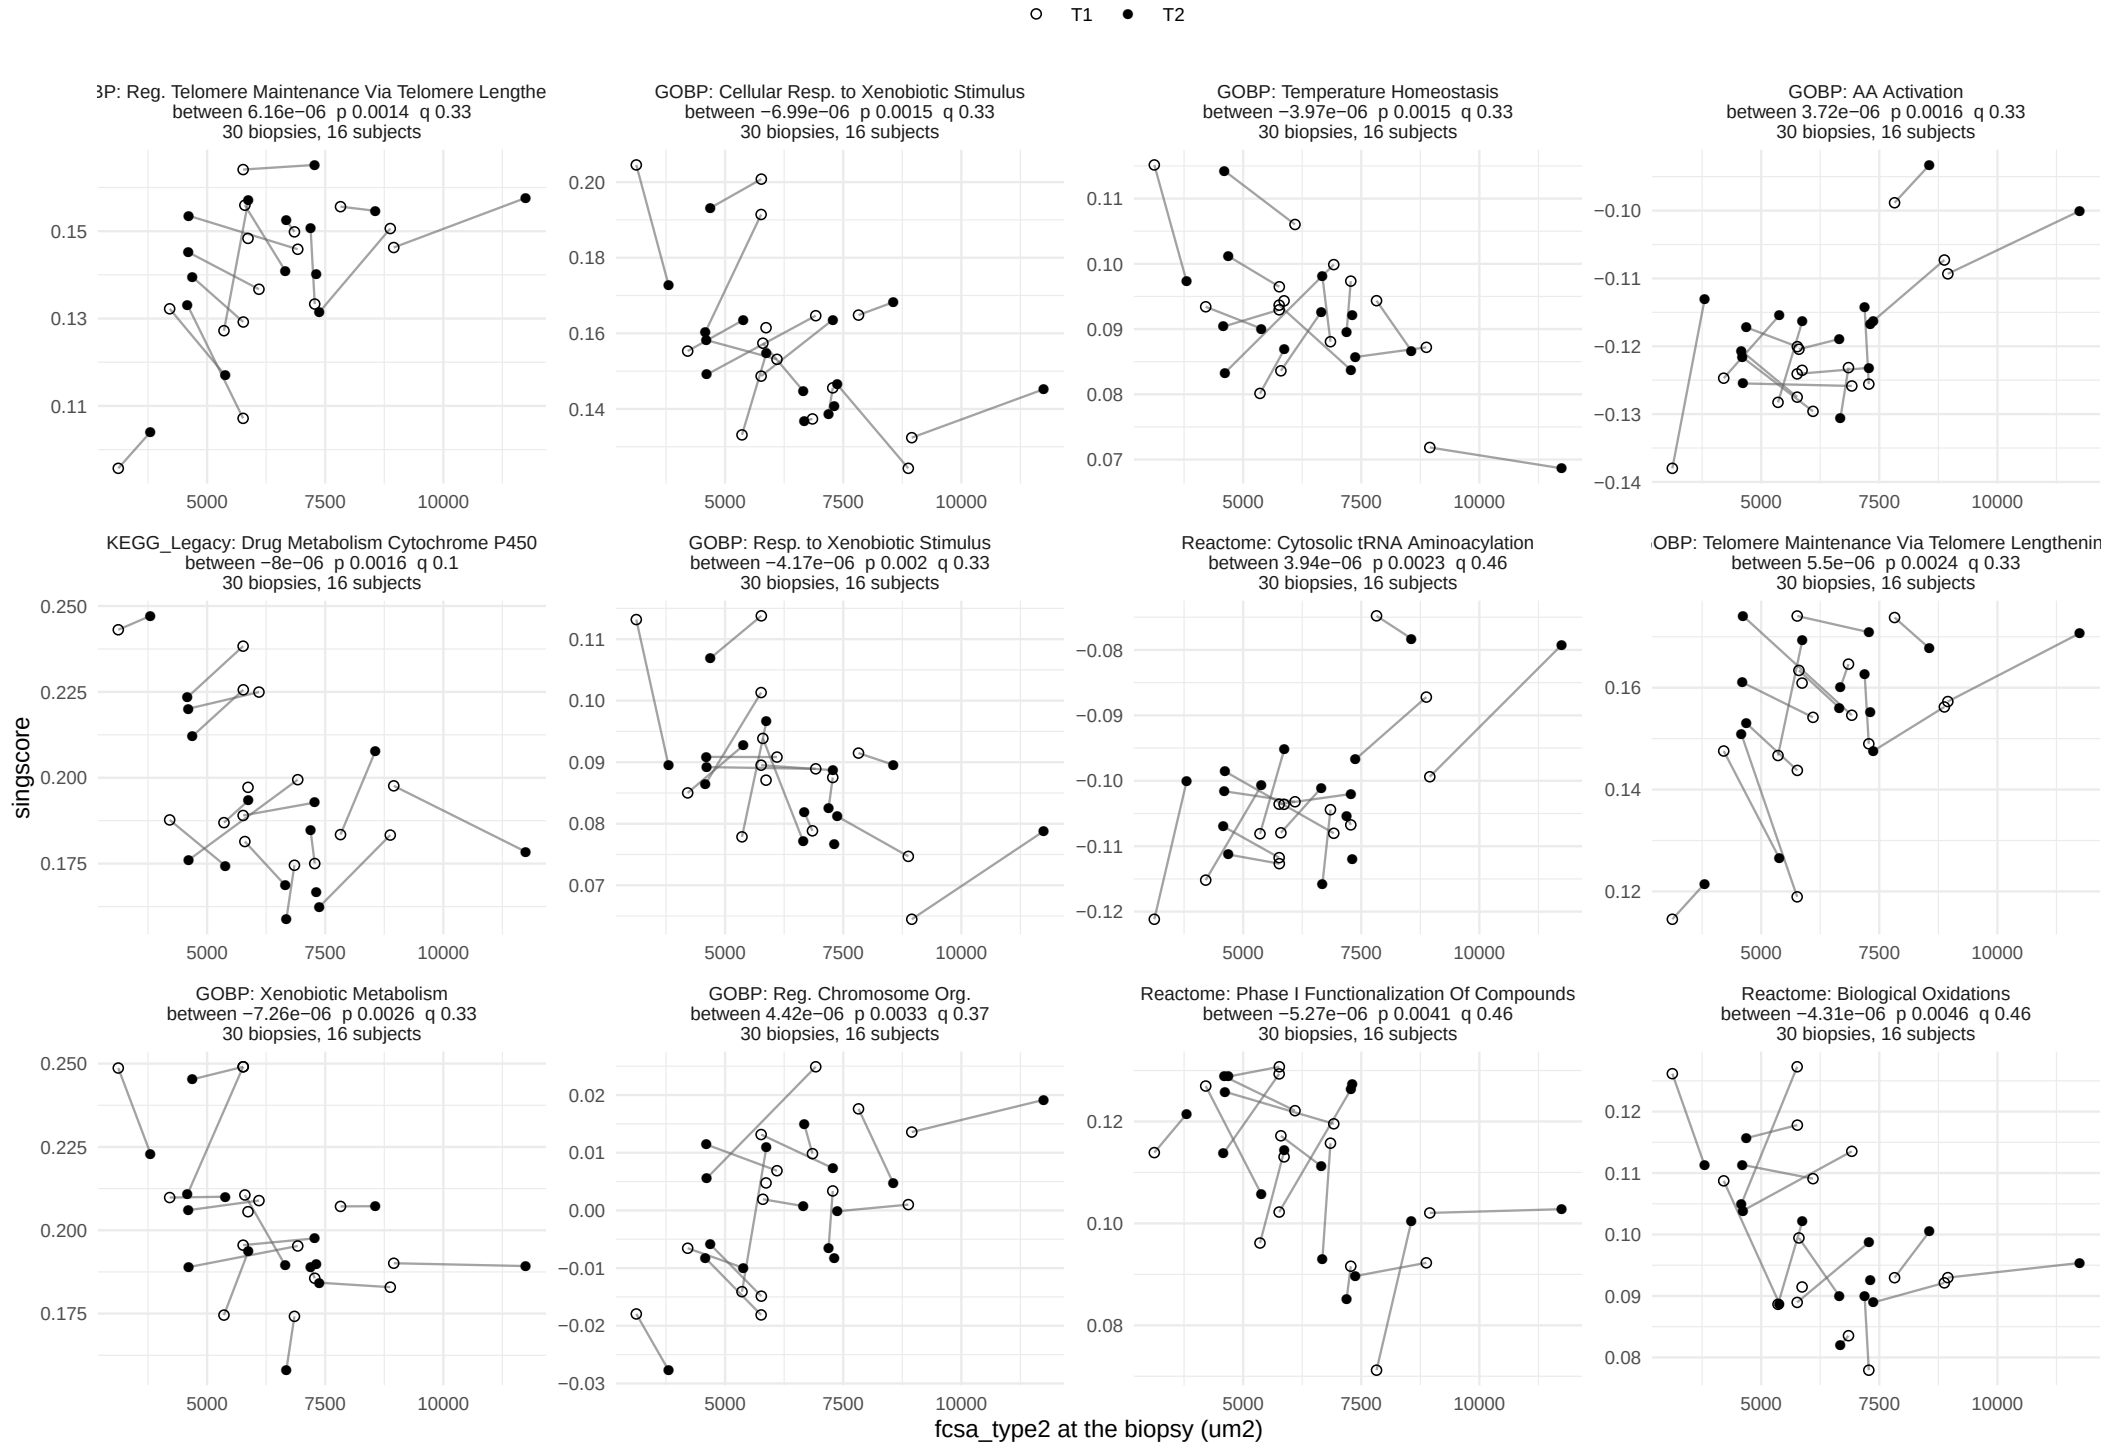

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/02_sets.xlsx, model.

fcsa_type2, between−person term


87 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 2 of 8.

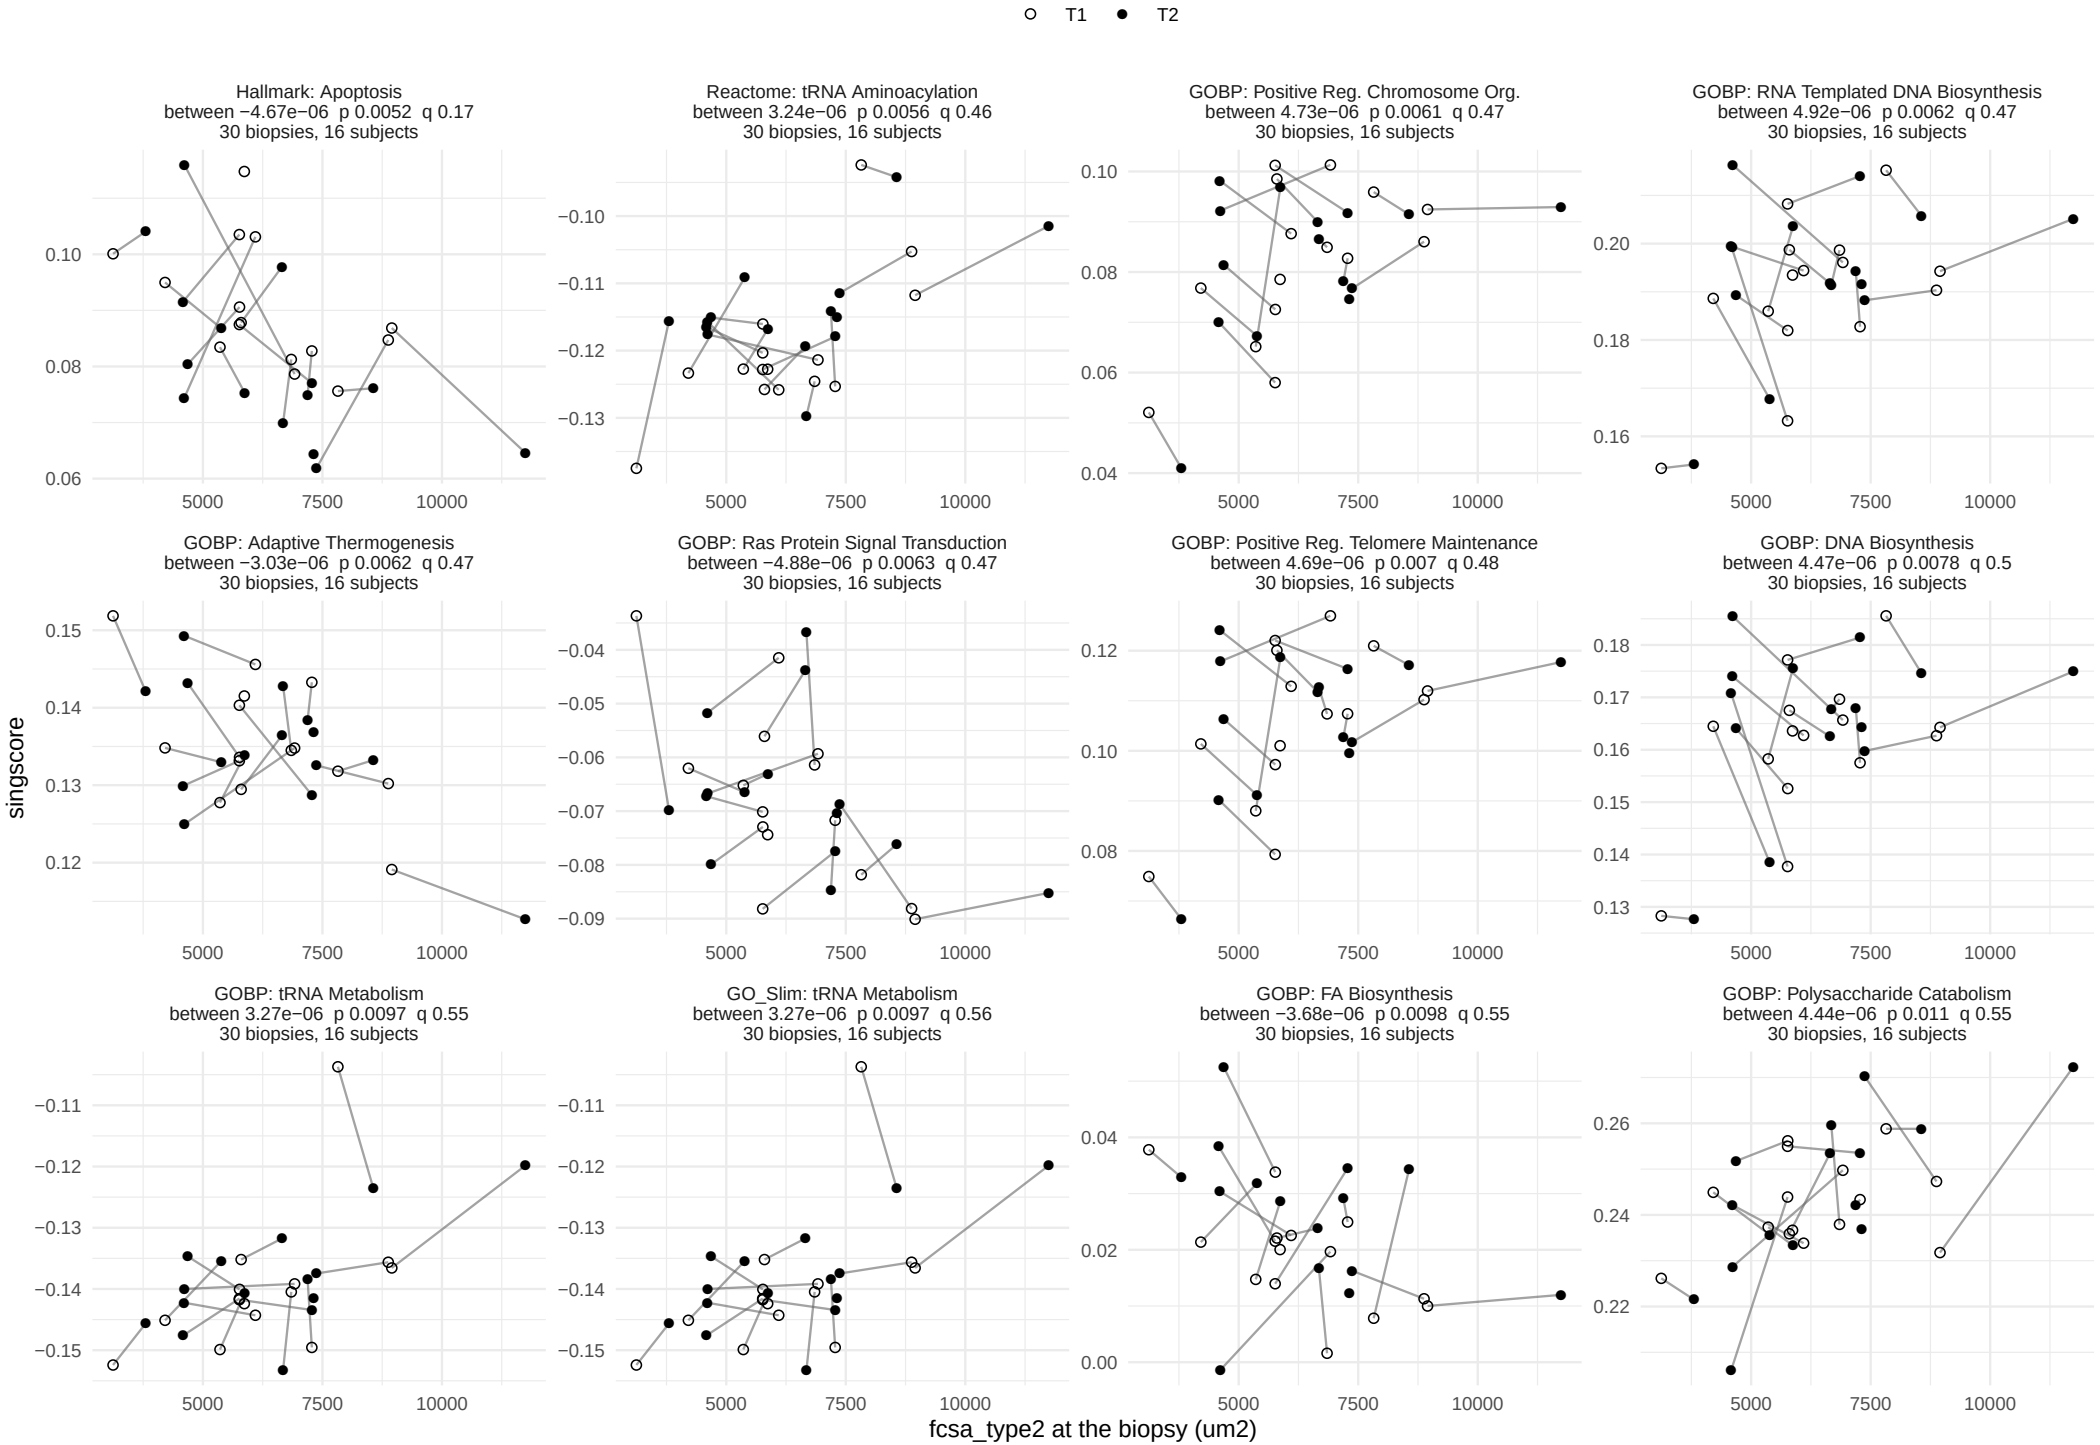

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/02_sets.xlsx, model.

fcsa_type2, between−person term


87 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 3 of 8.

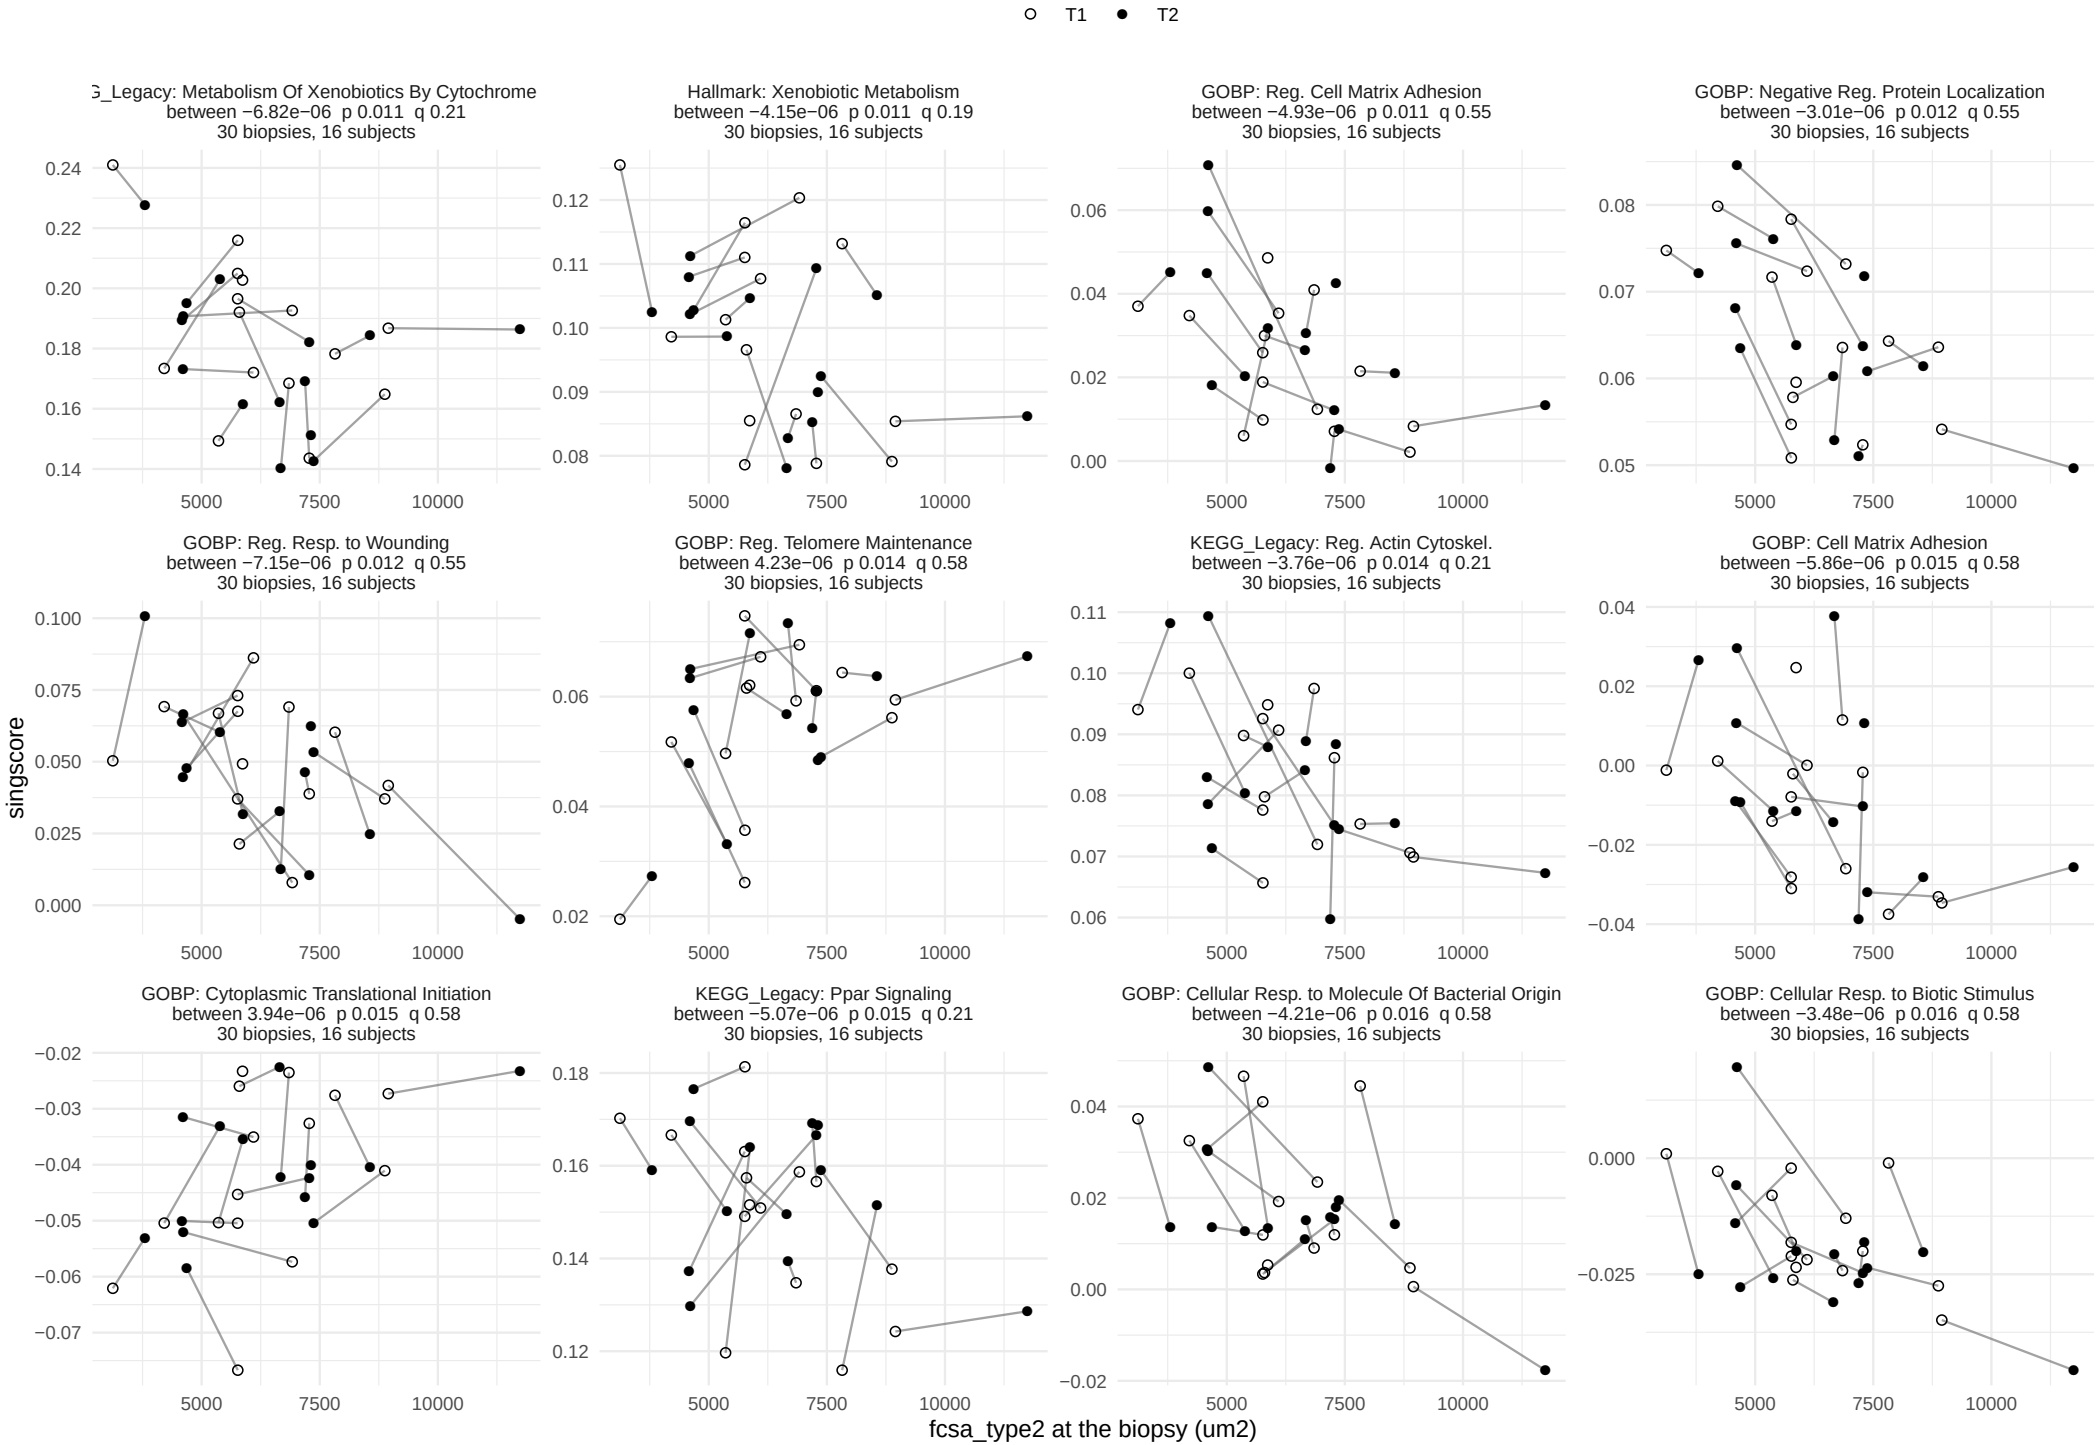

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/02_sets.xlsx, model.

fcsa_type2, between−person term


87 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 4 of 8.

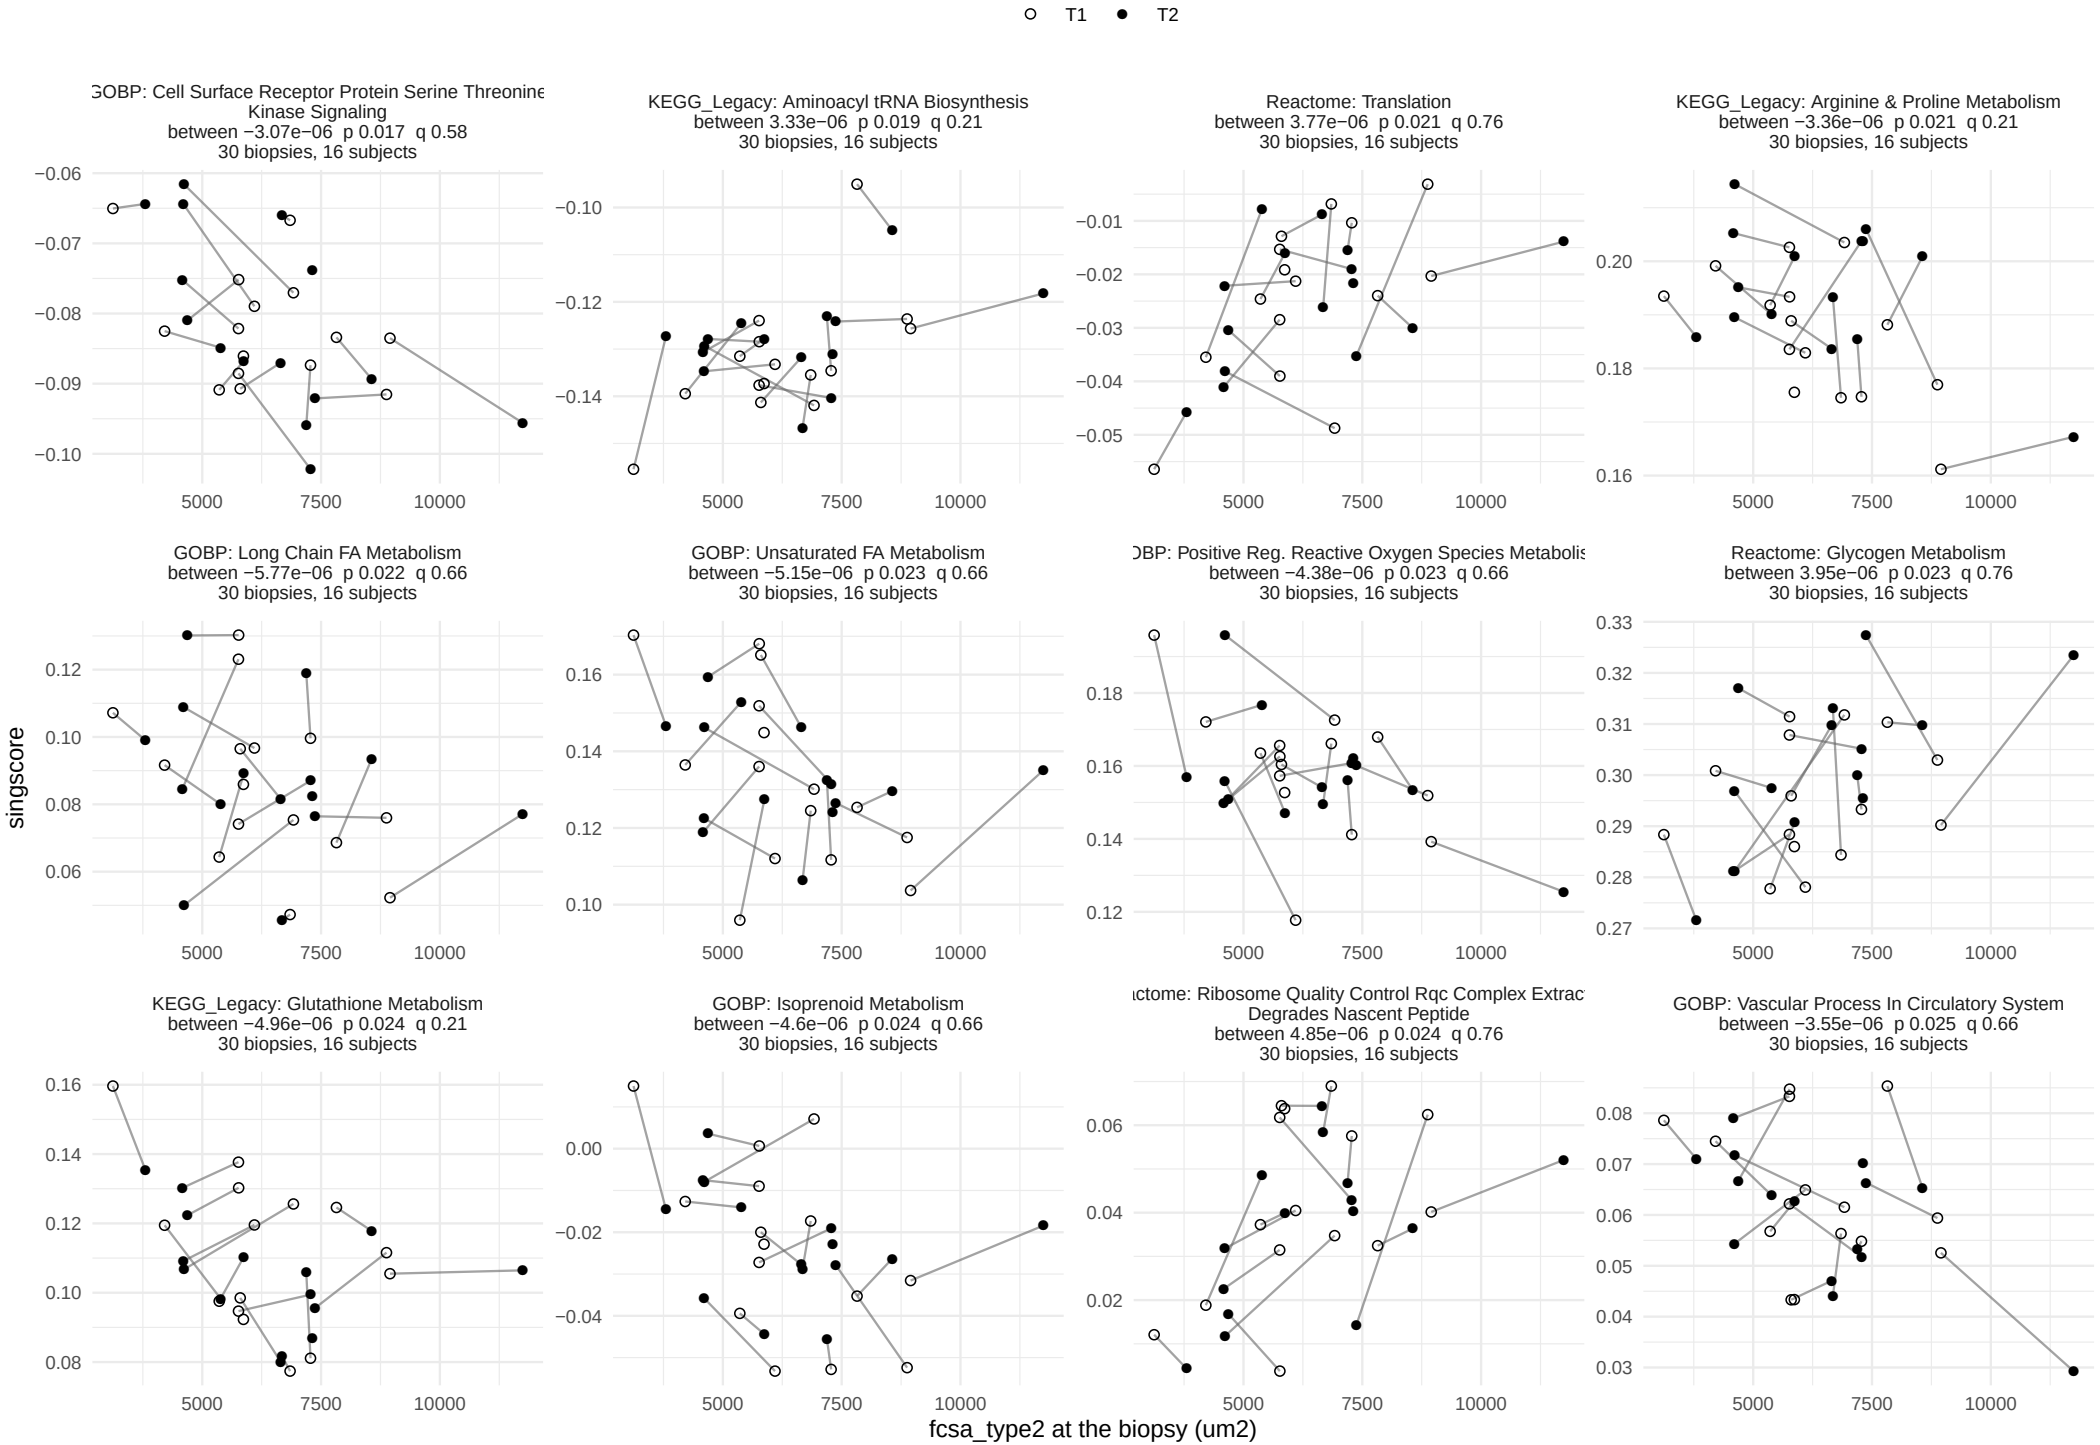

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/02_sets.xlsx, model.

fcsa_type2, between−person term


87 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 5 of 8.

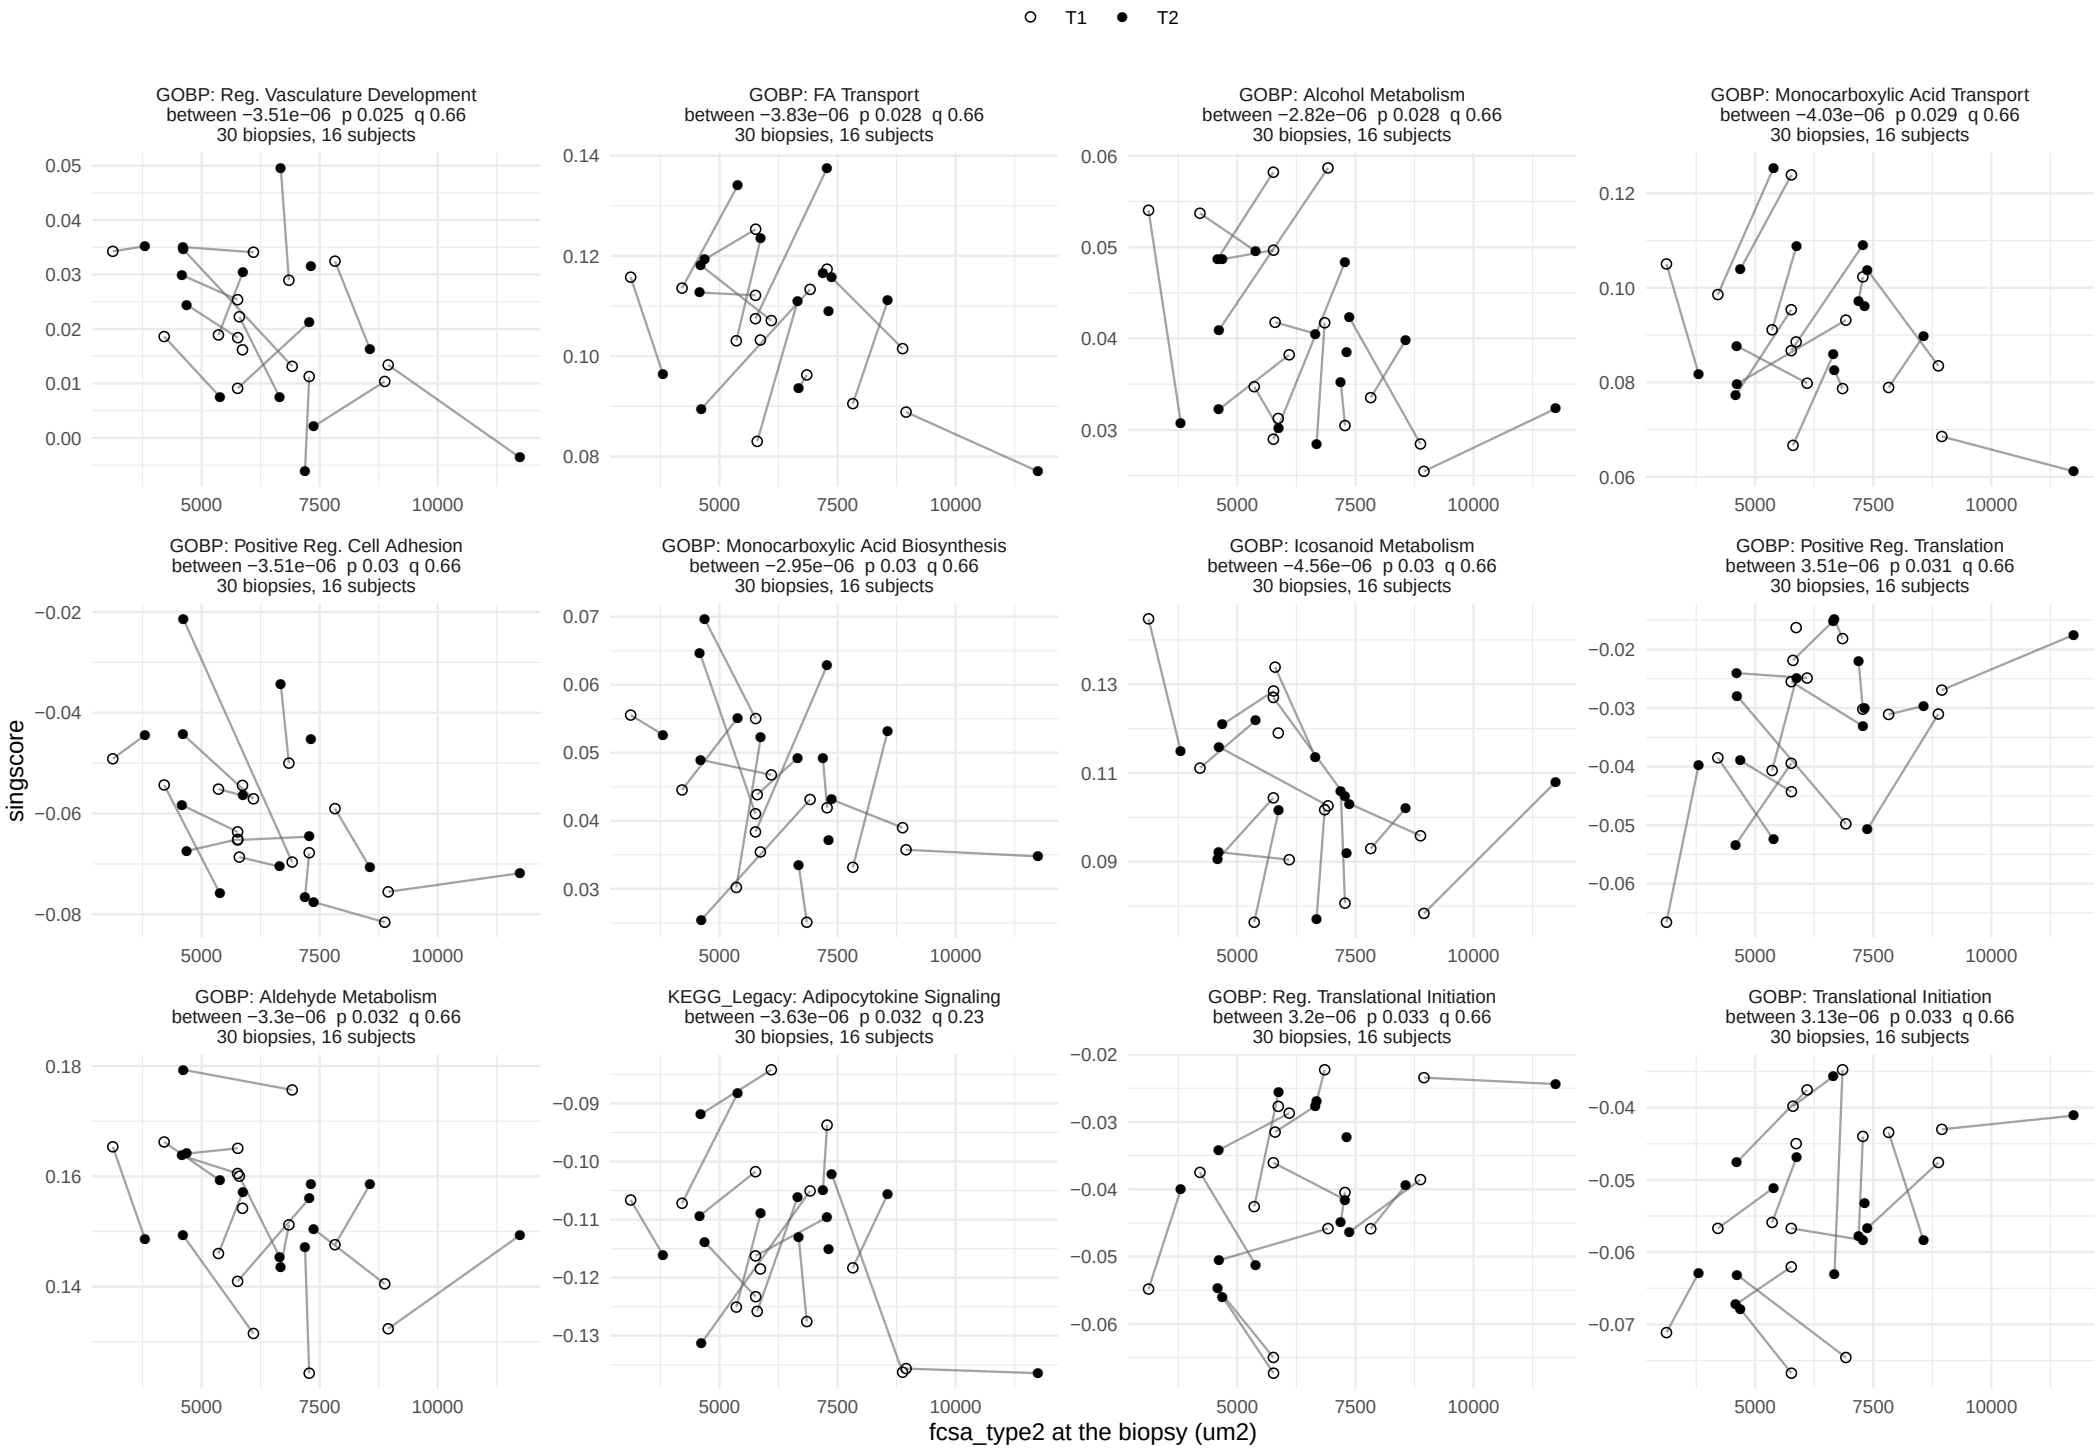

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/02_sets.xlsx, model.

fcsa_type2, between−person term


87 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 6 of 8.

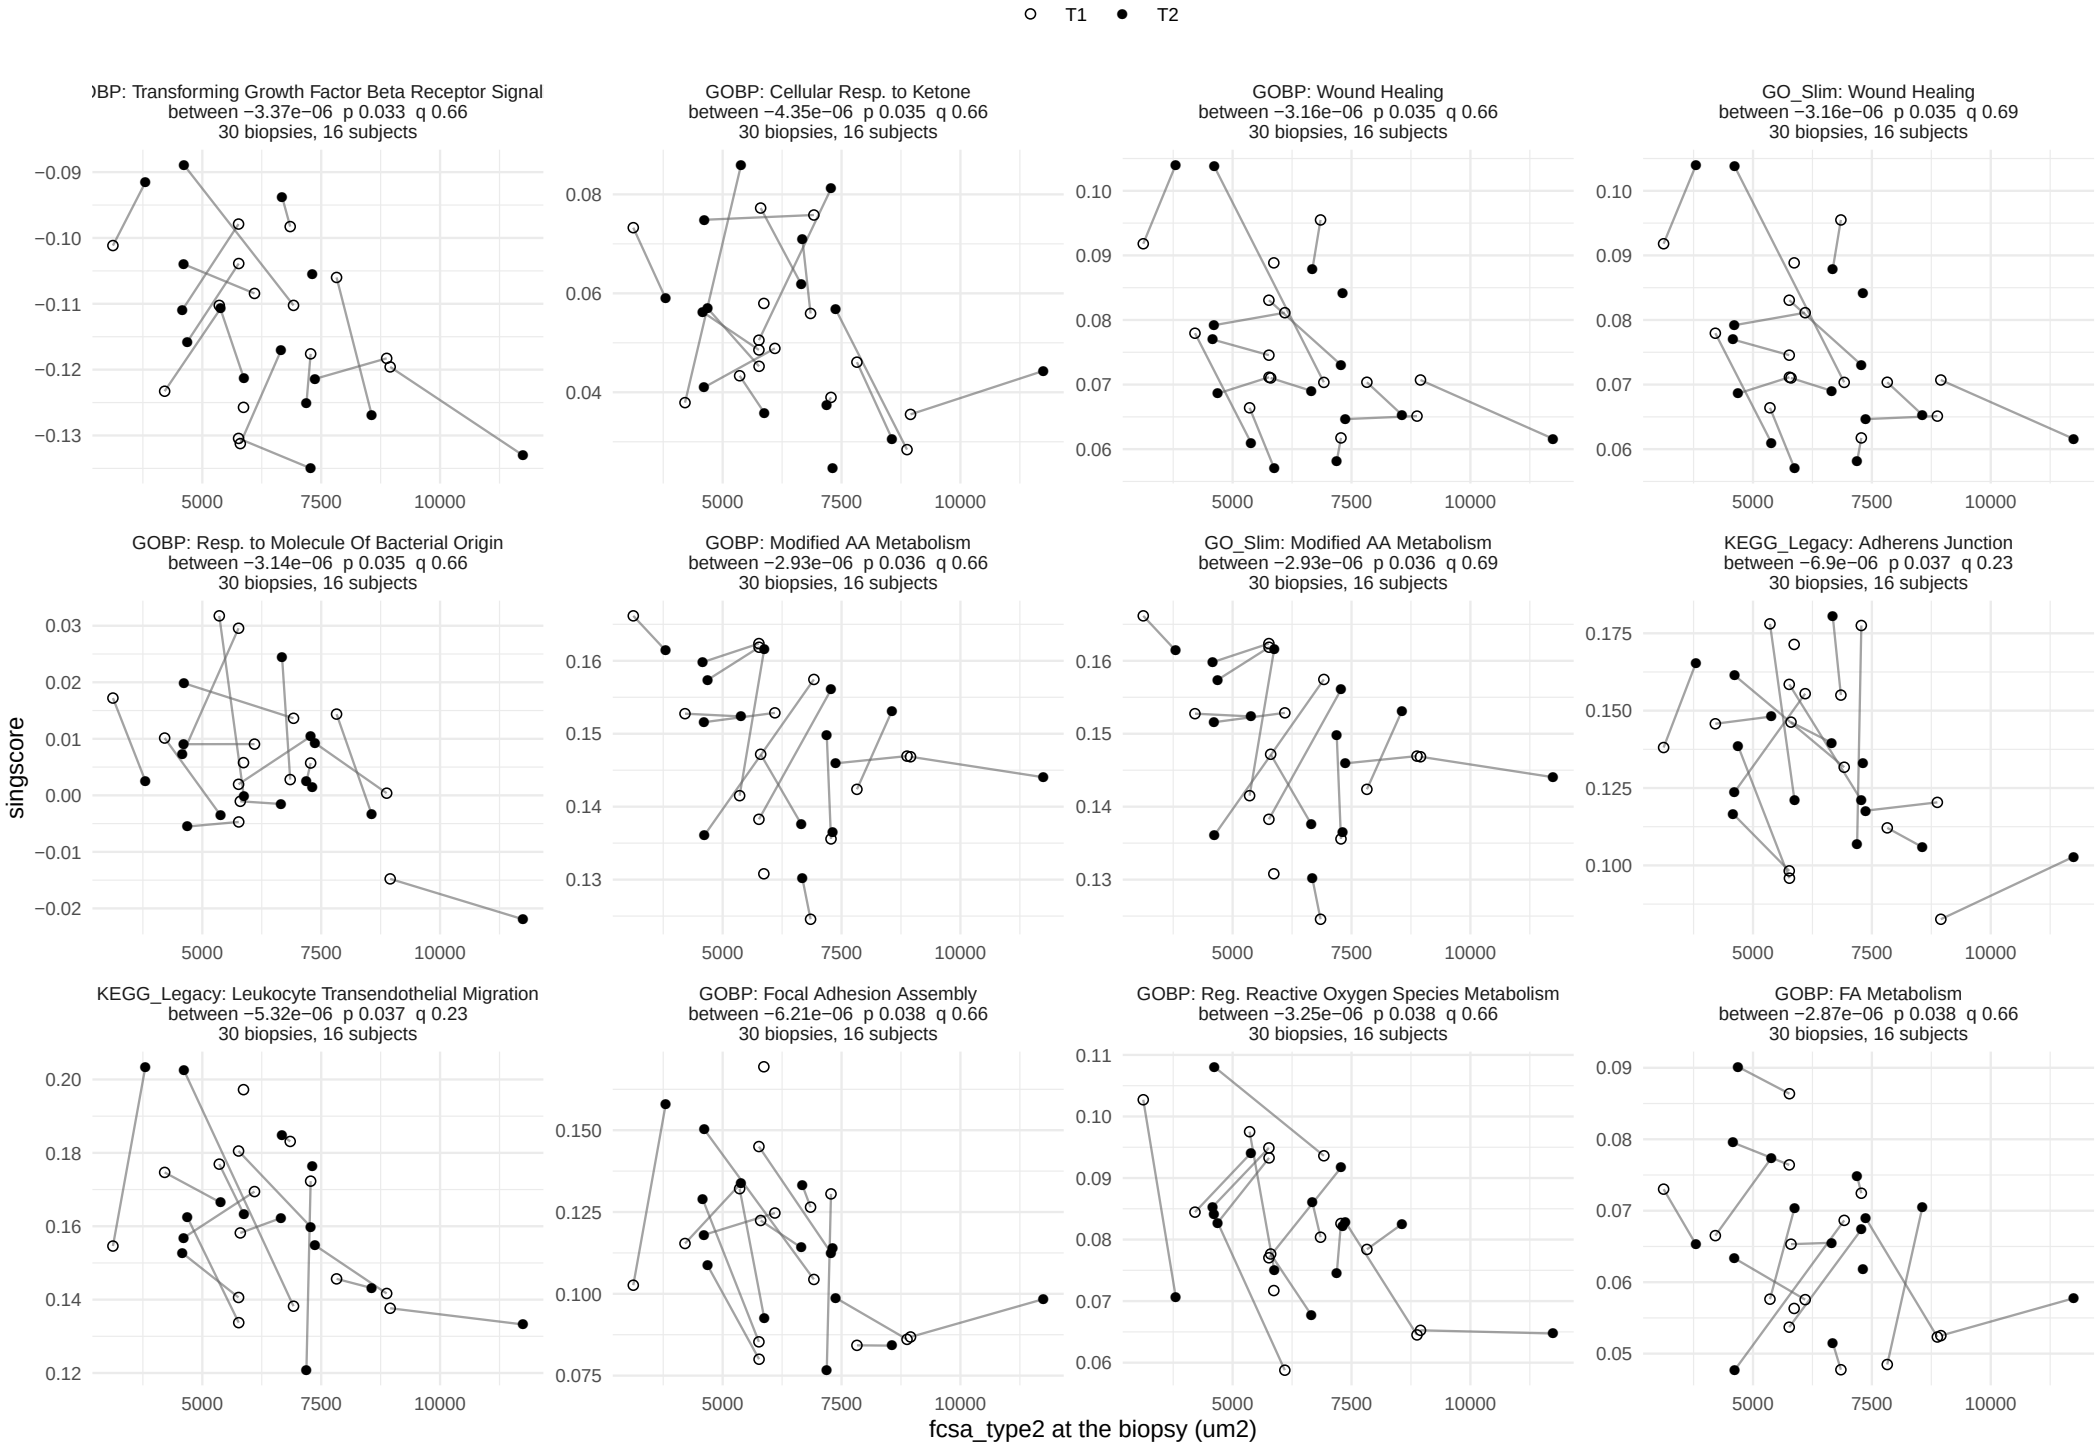

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/02_sets.xlsx, model.

fcsa_type2, between−person term


87 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 7 of 8.

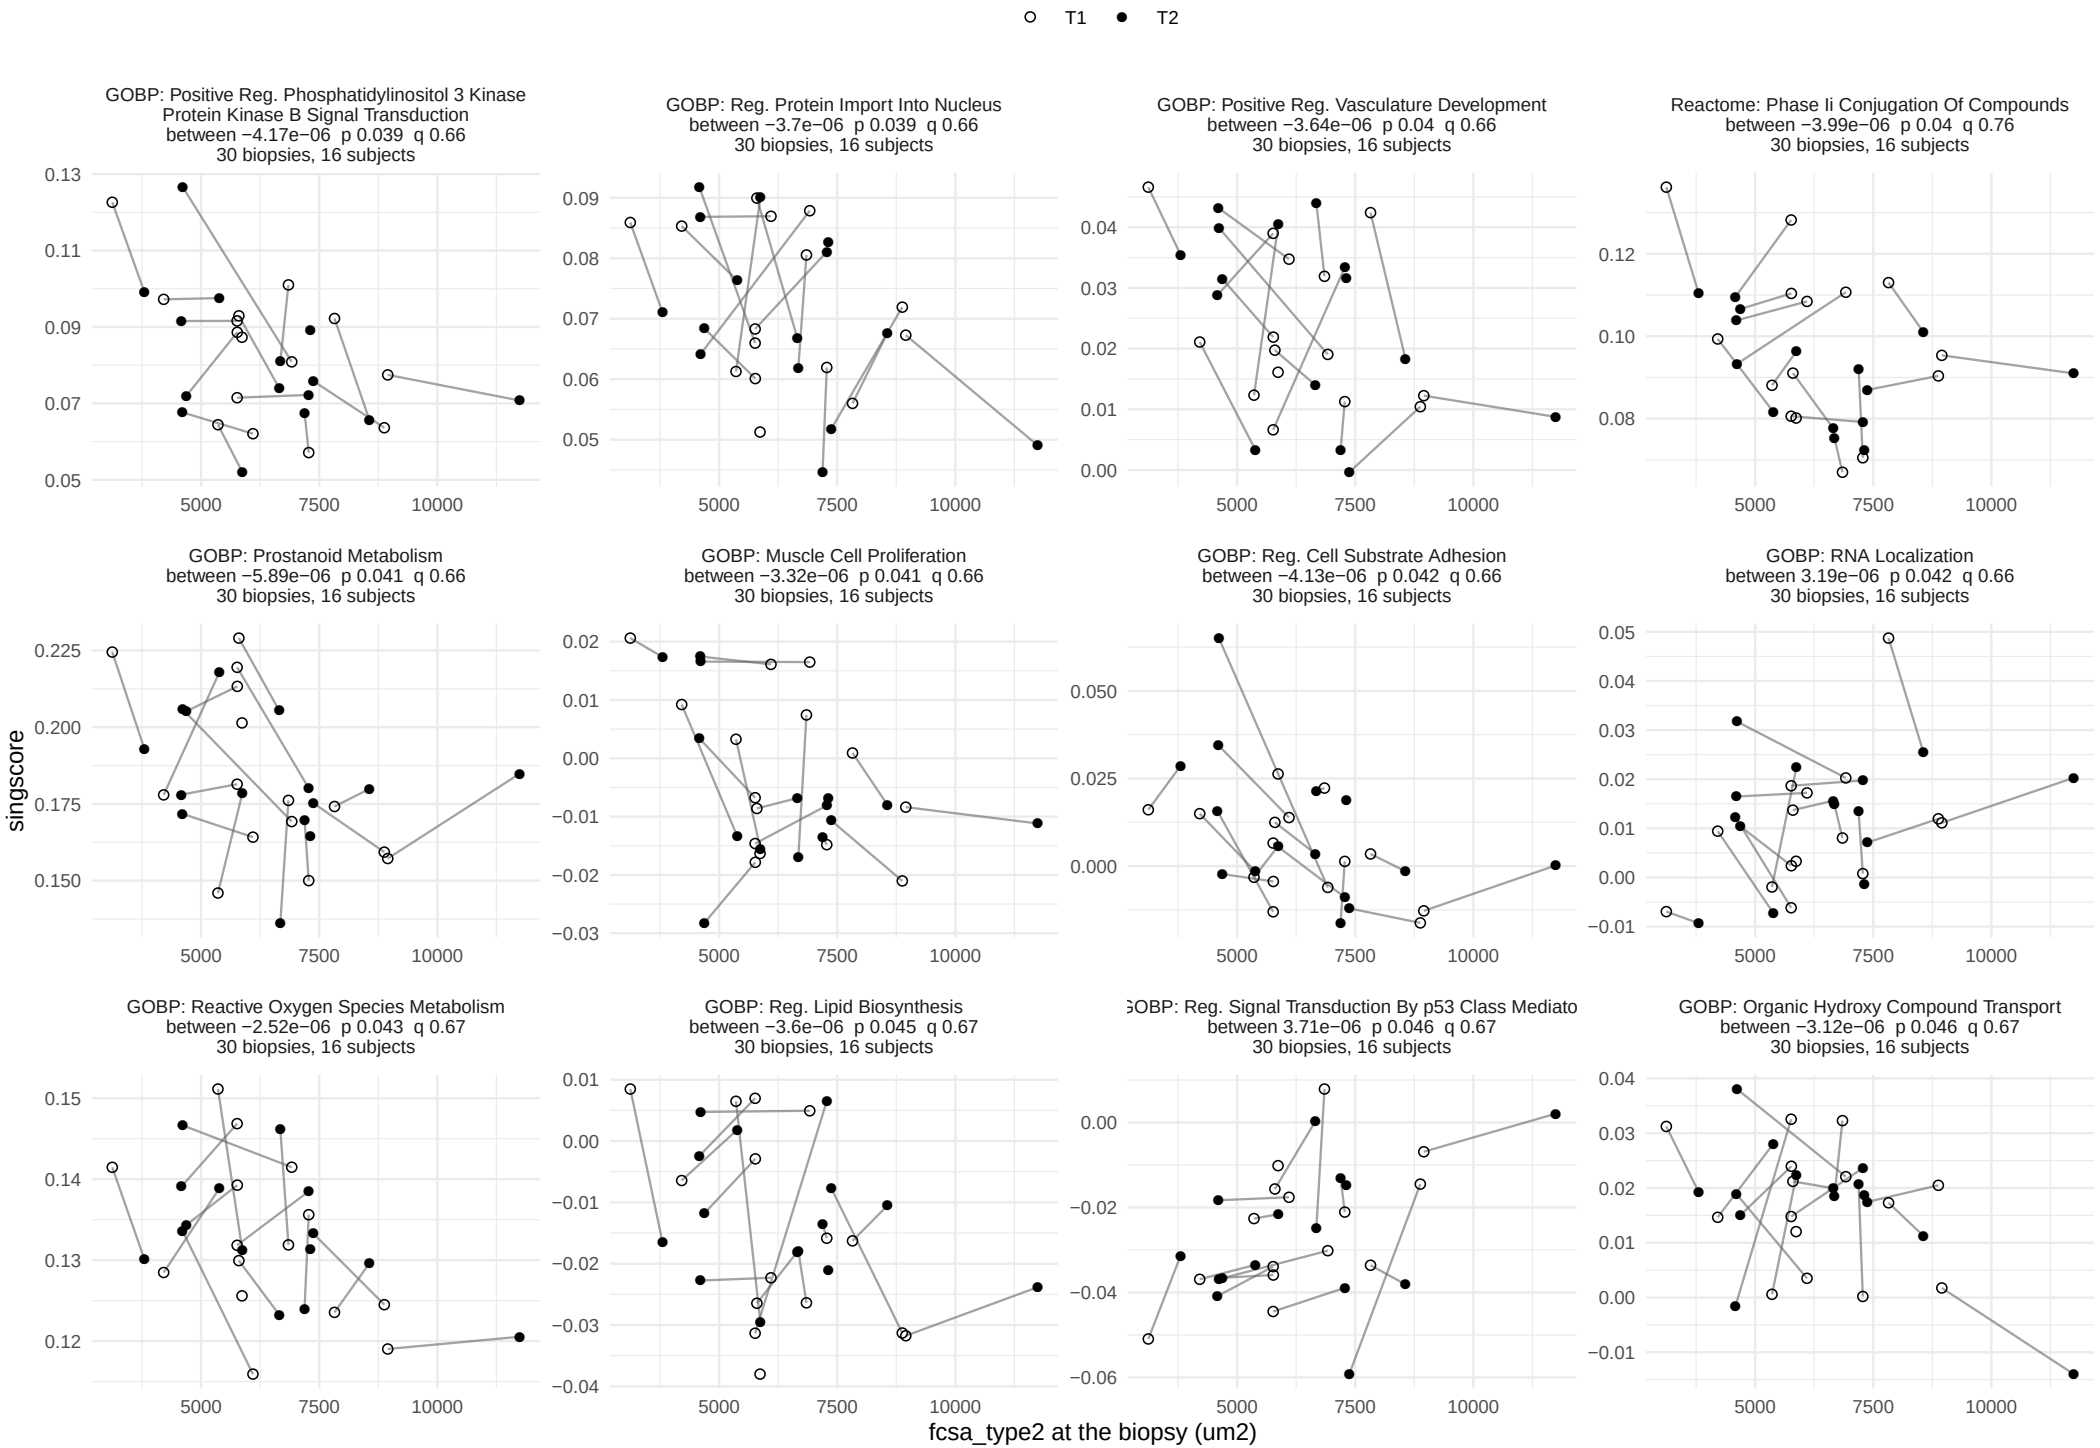

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/02_sets.xlsx, model.

fcsa_type2, between−person term


87 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 8 of 8.

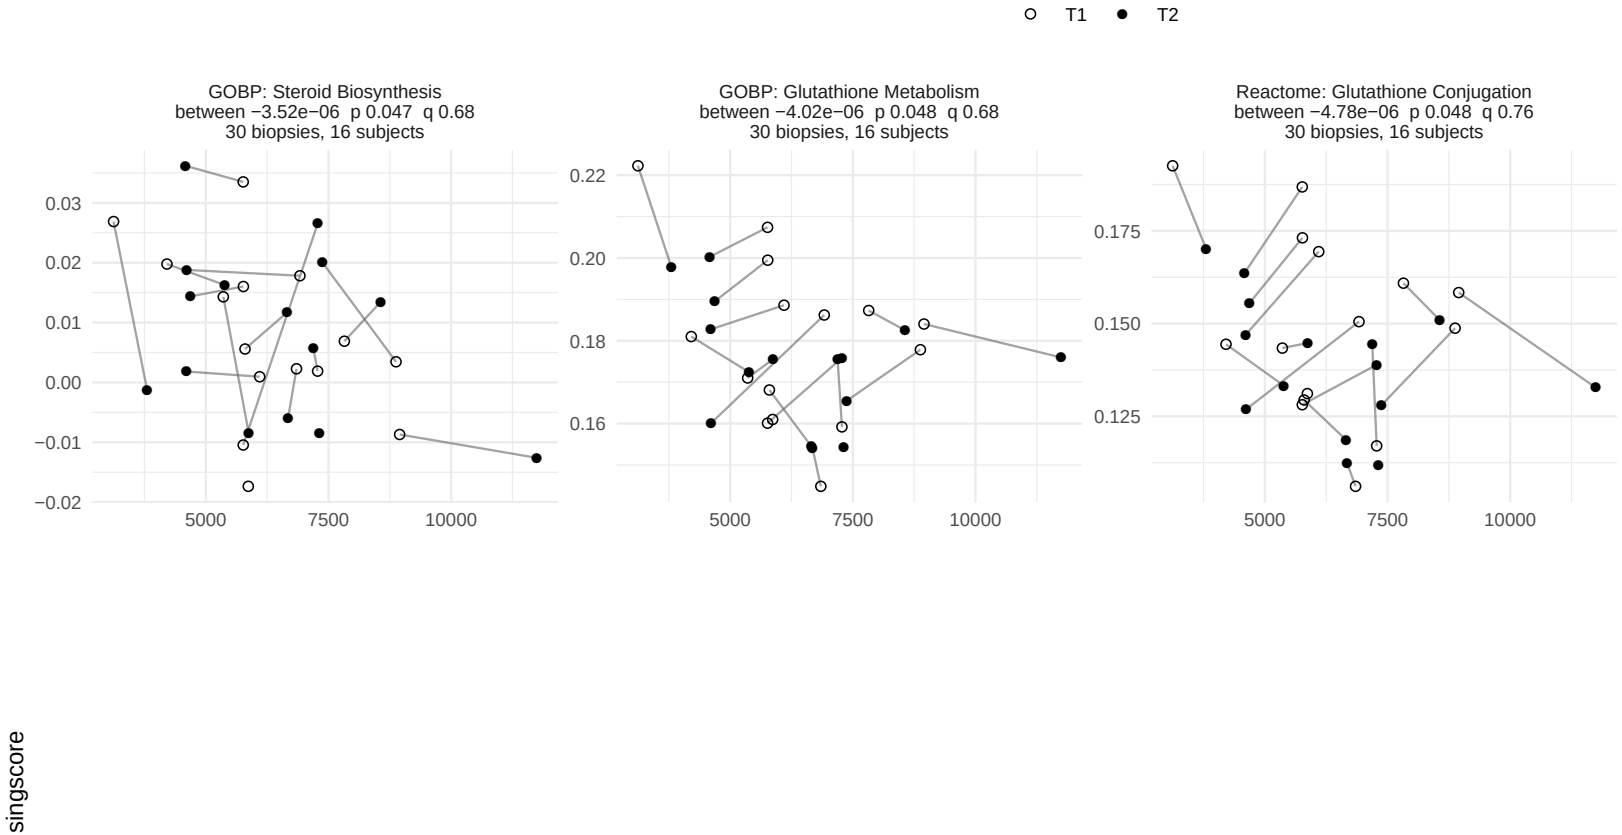

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/02_sets.xlsx, model.

mcsa, within−person term


51 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 1 of 5.

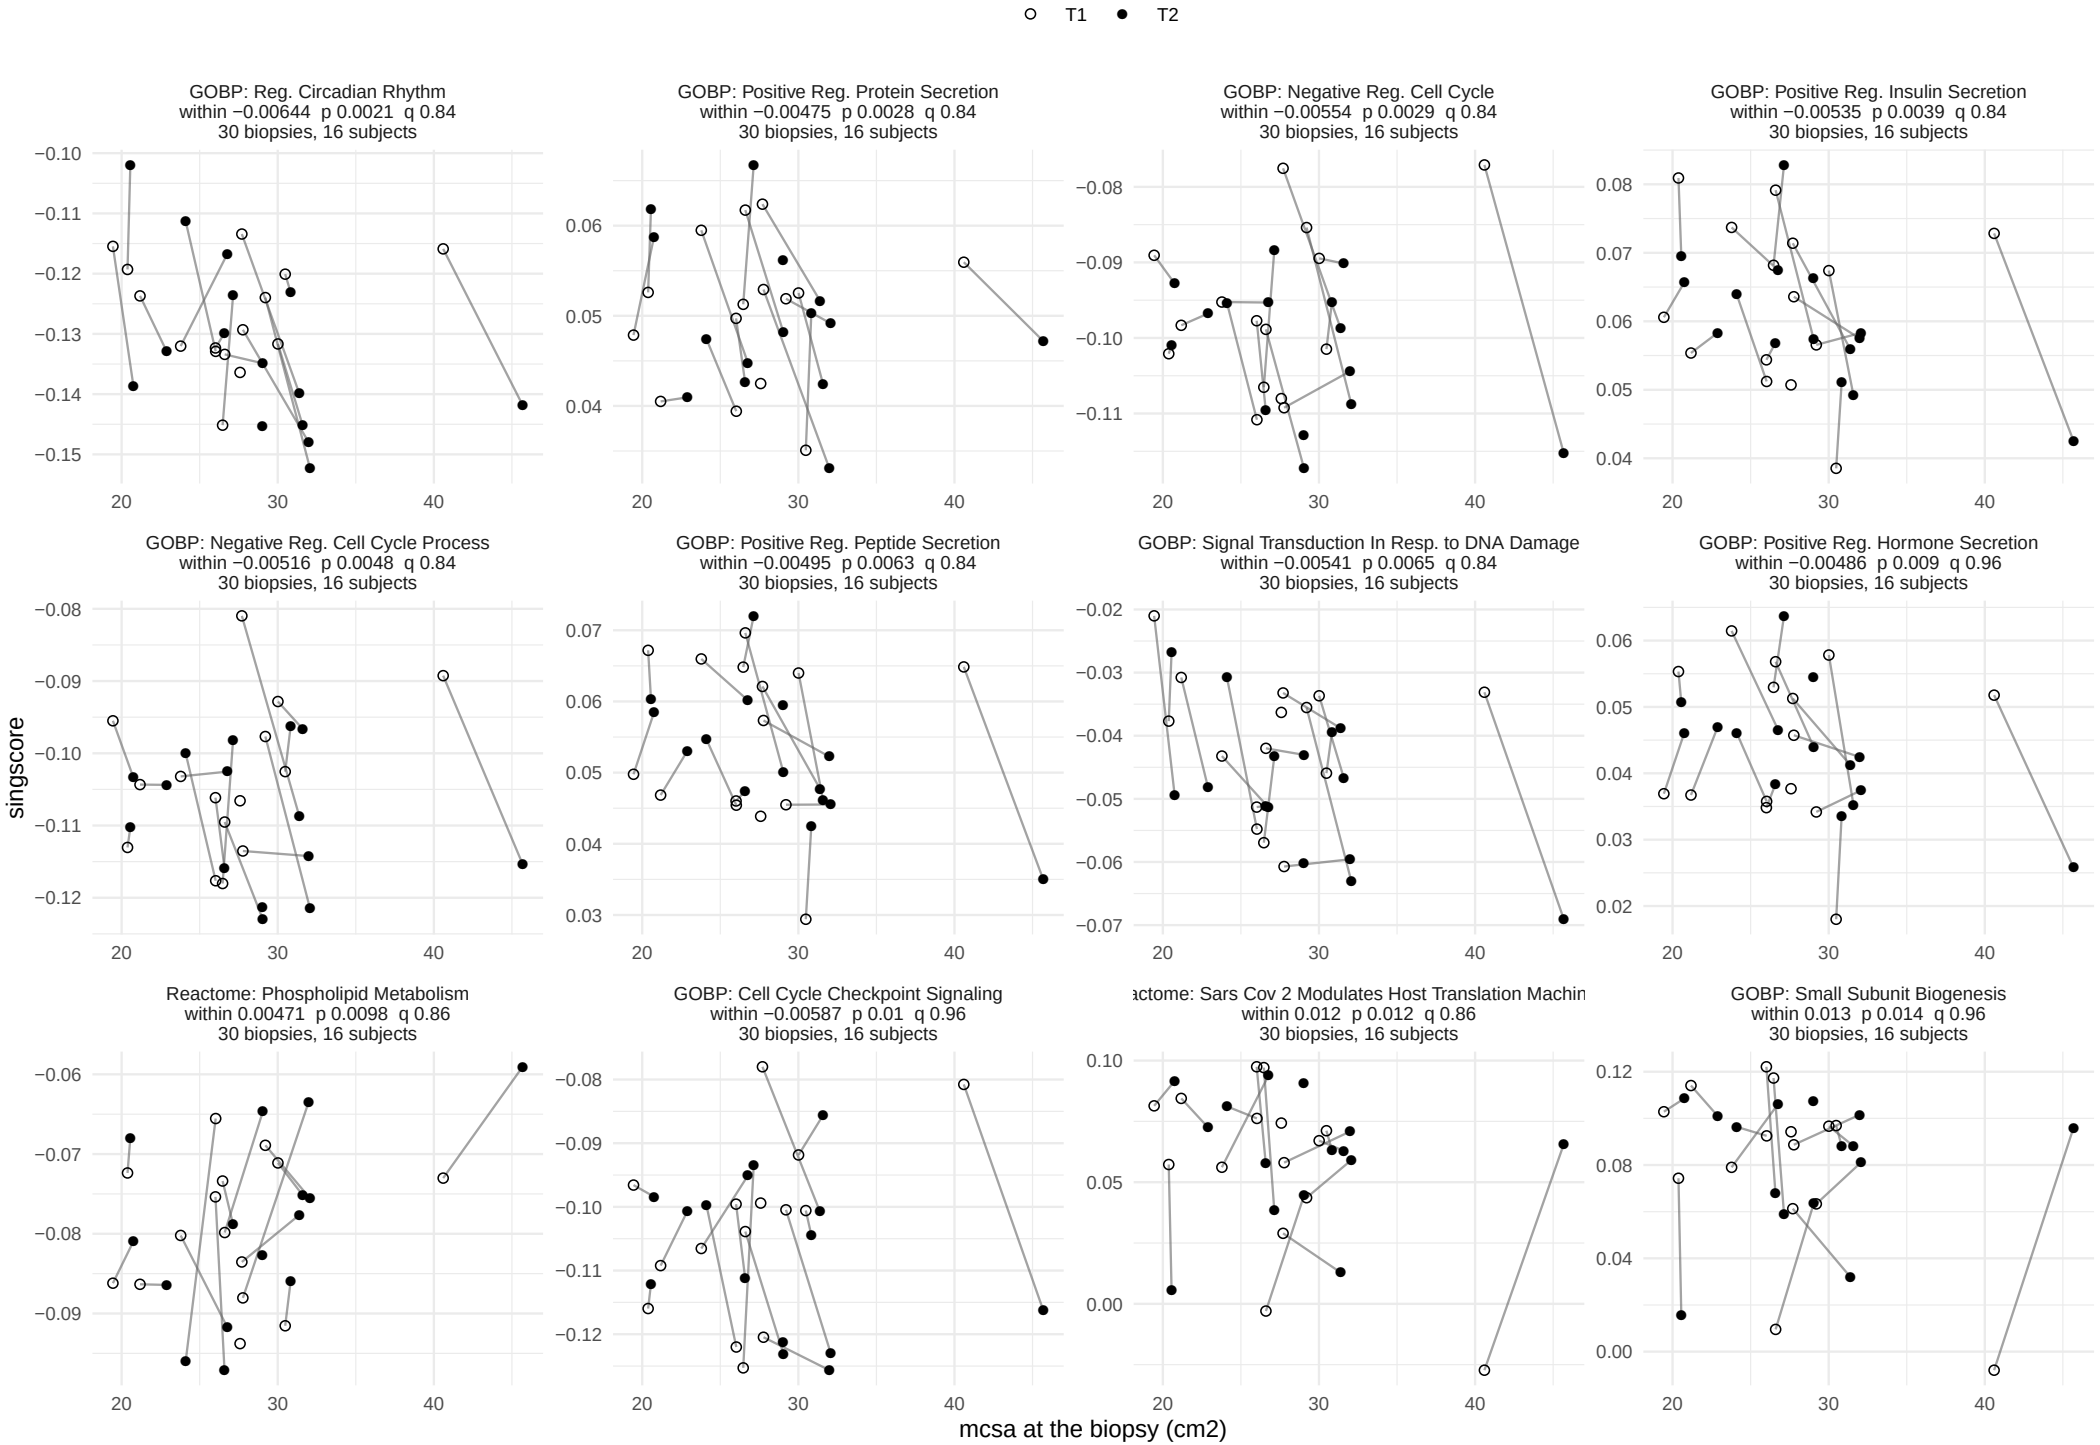

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/02_sets.xlsx, model.

mcsa, within−person term


51 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 2 of 5.

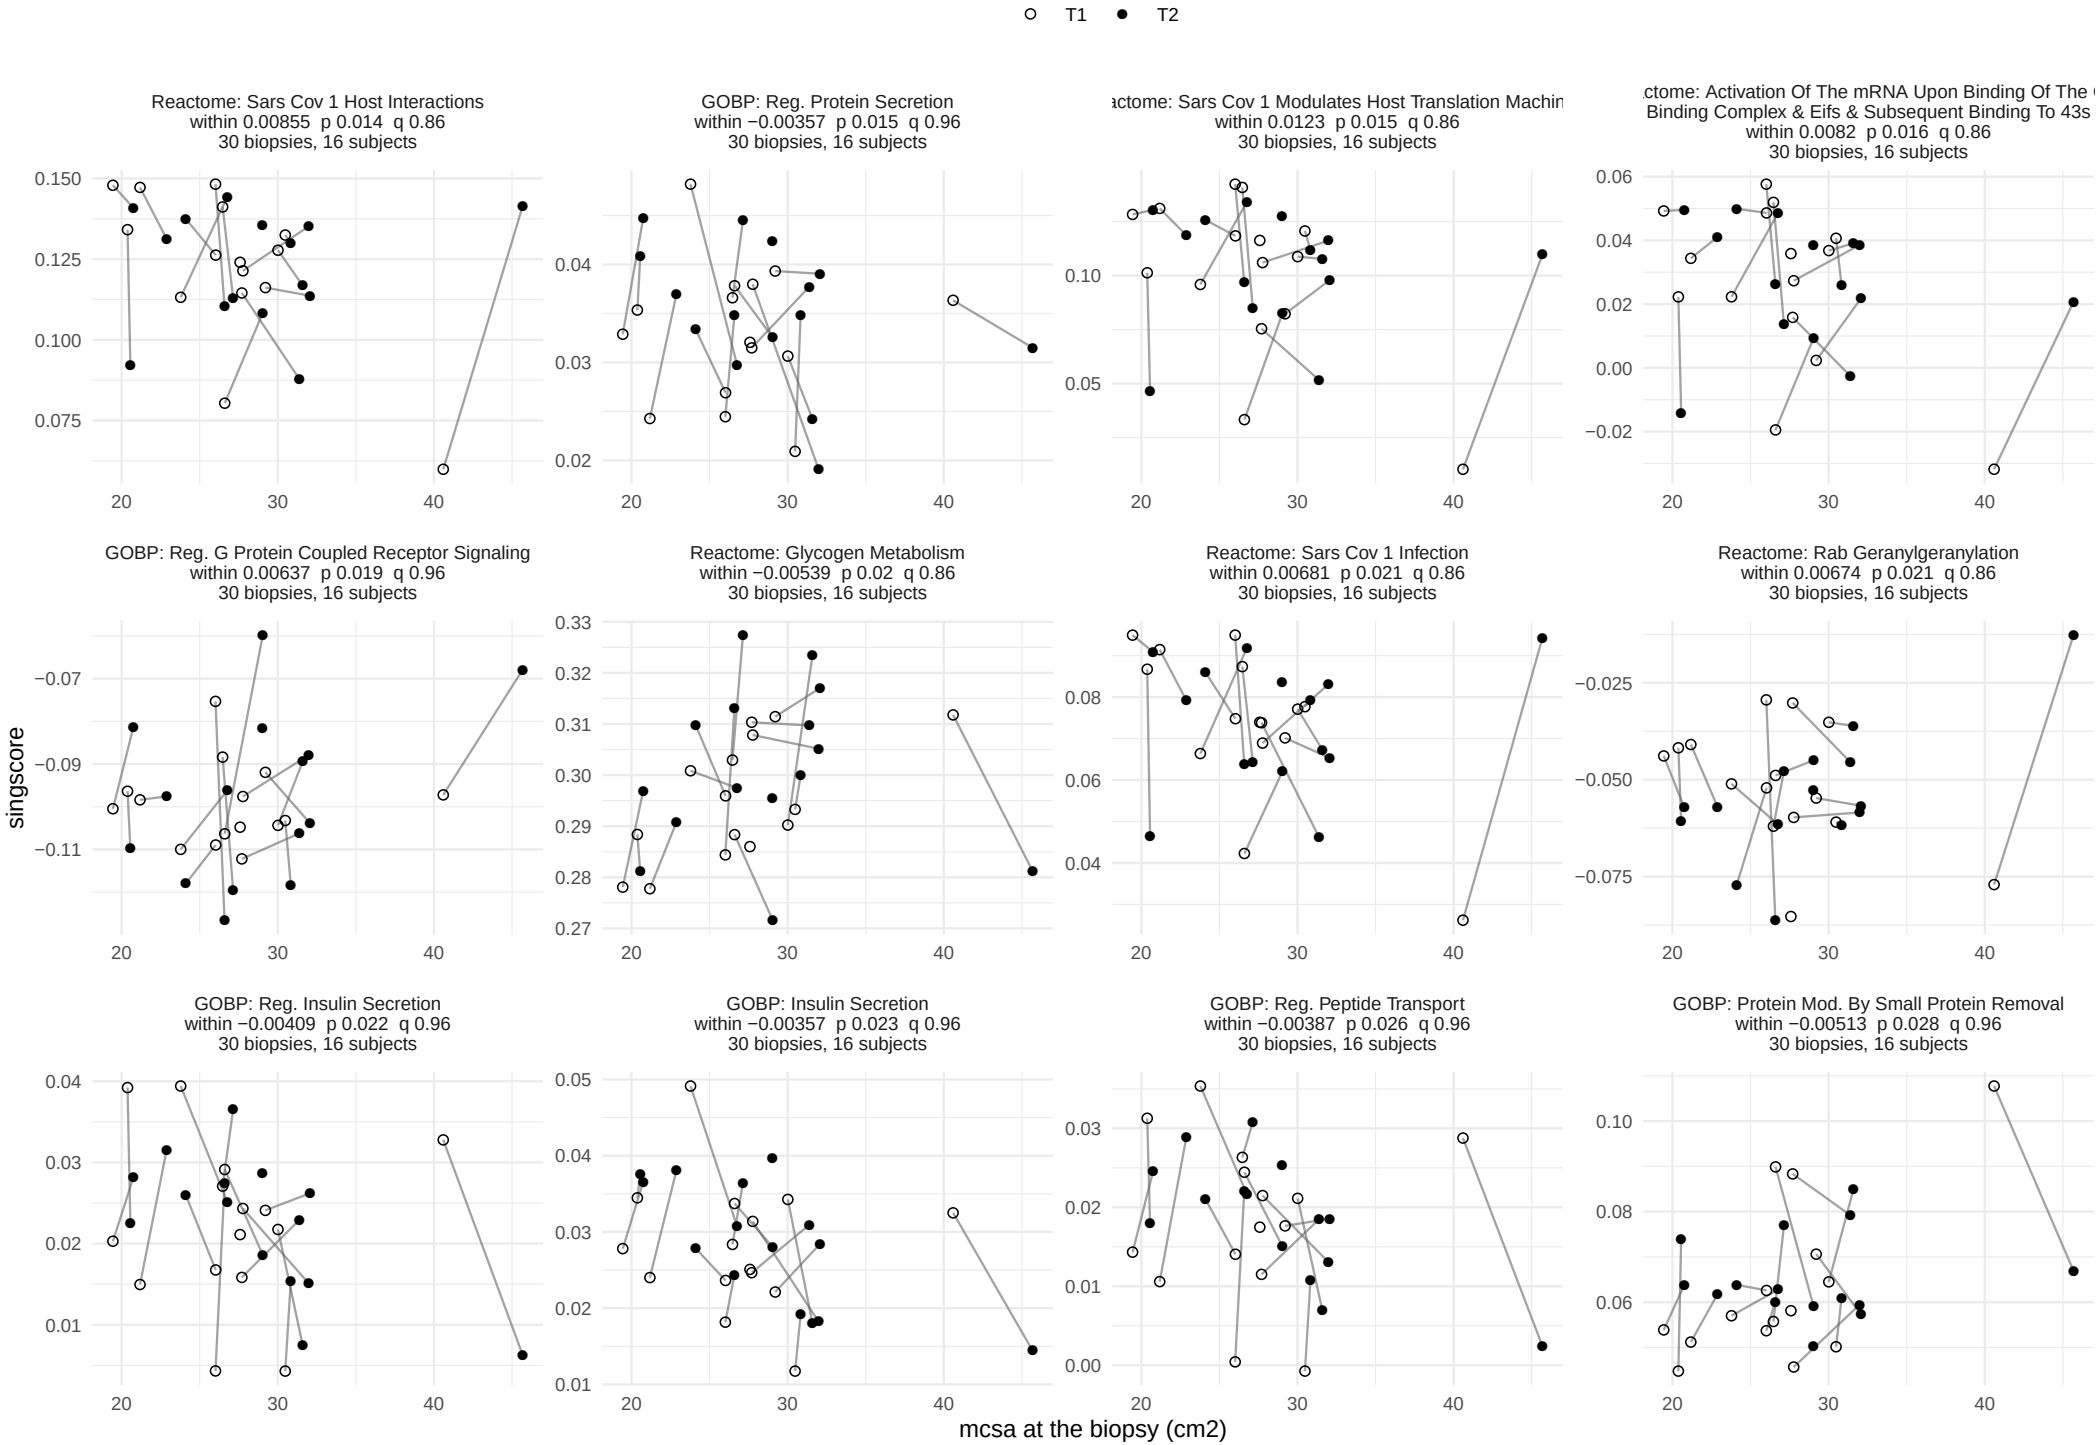

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/02_sets.xlsx, model.

mcsa, within−person term


51 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 3 of 5.

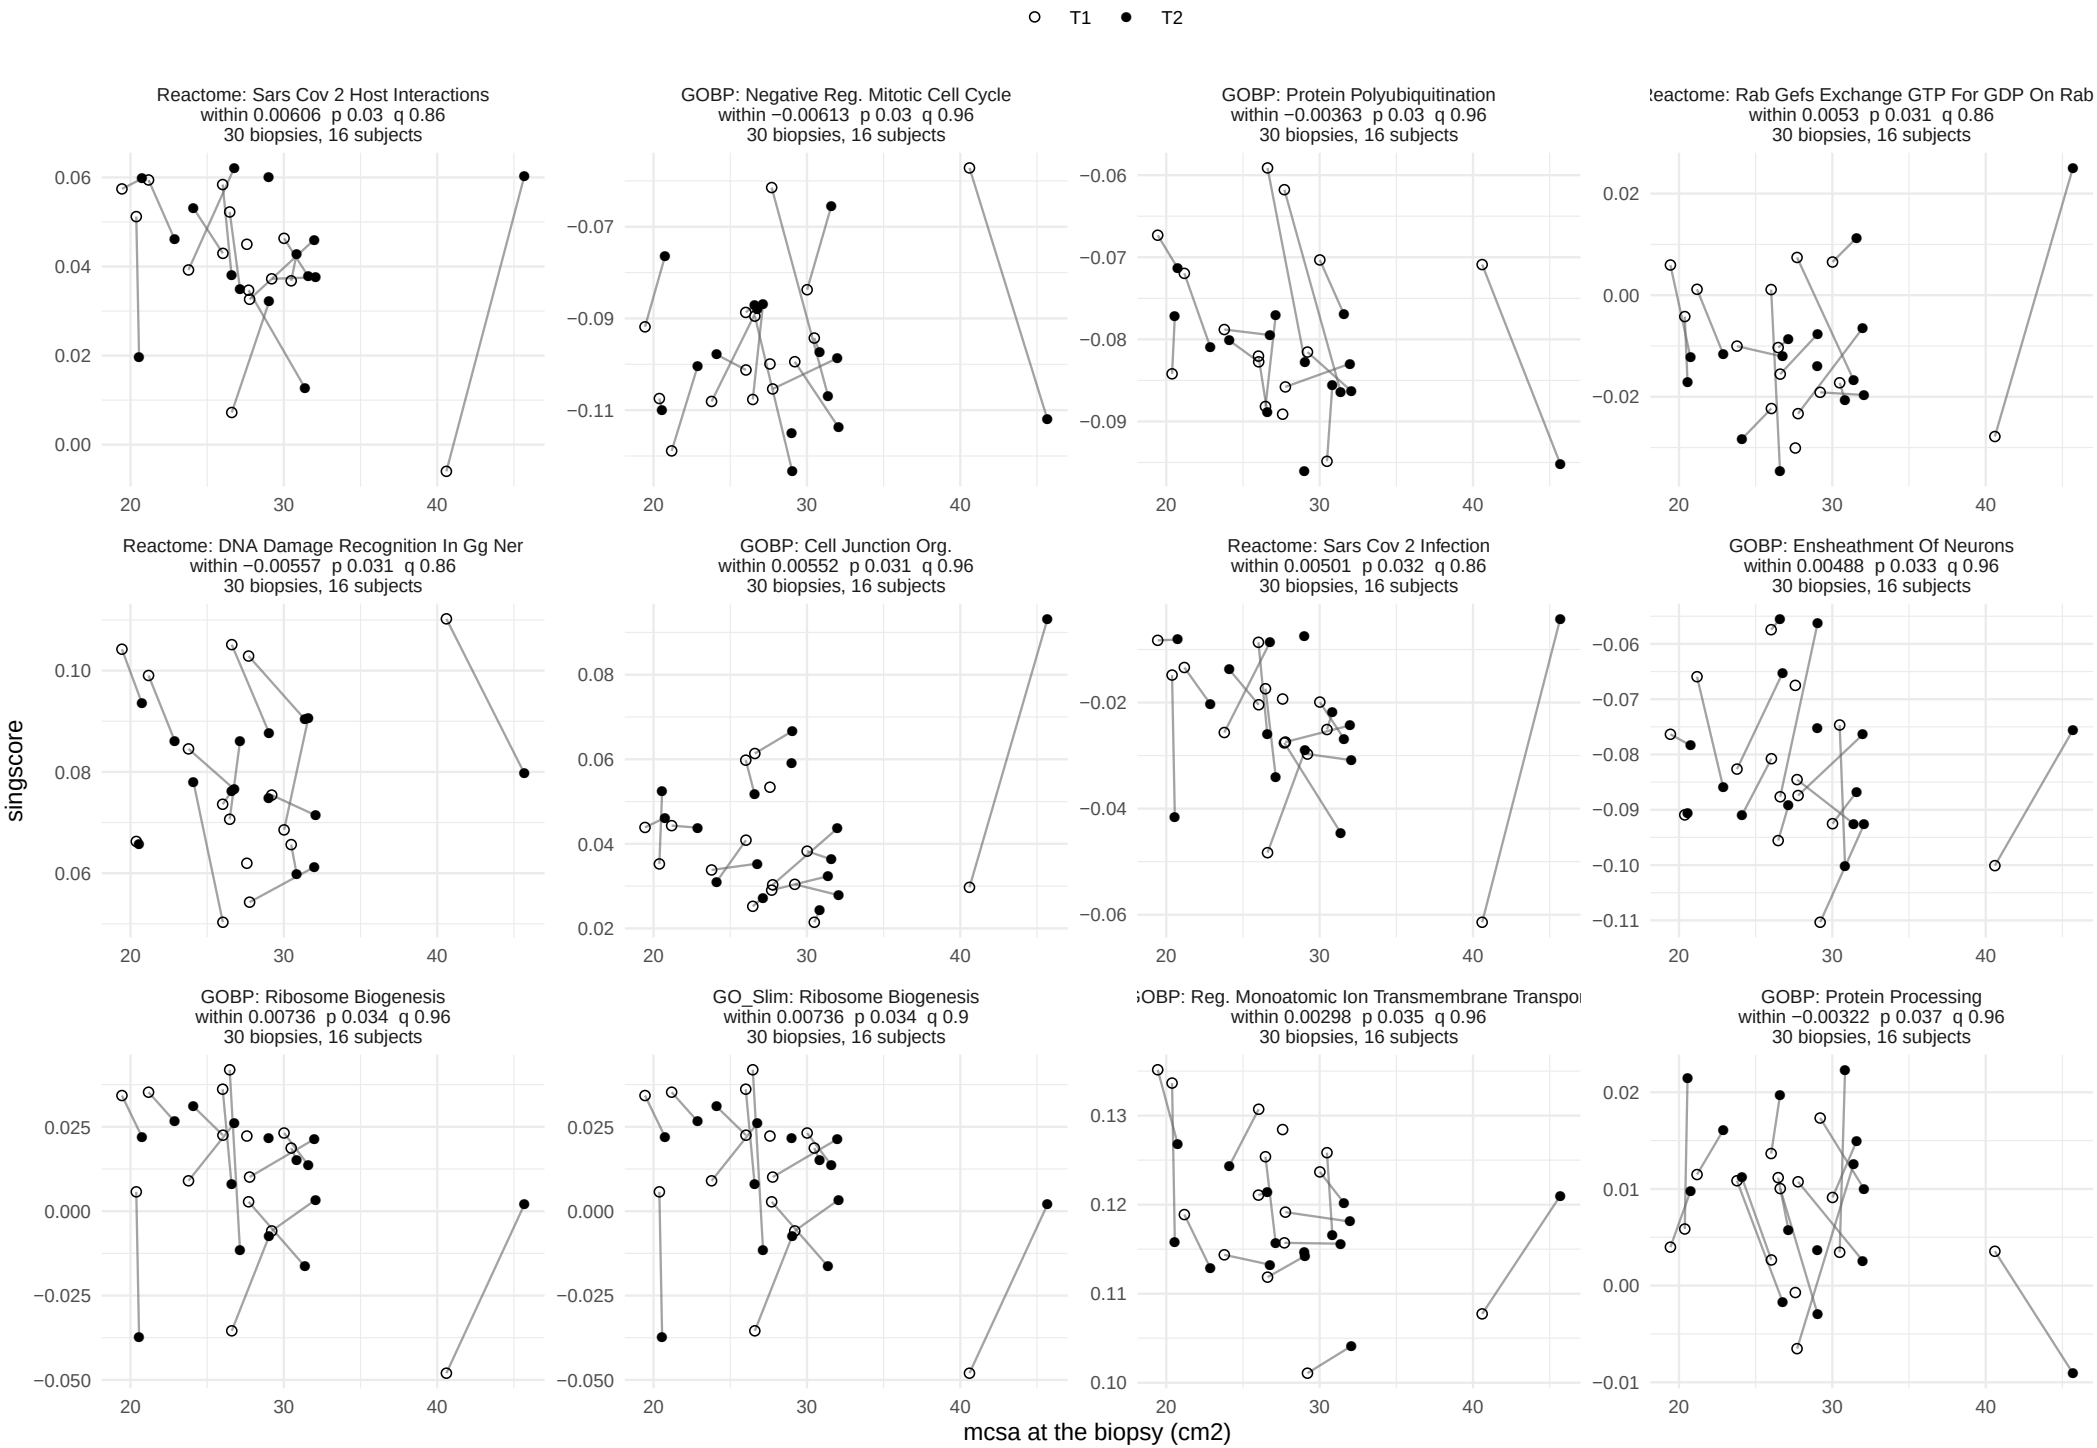

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/02_sets.xlsx, model.

mcsa, within−person term


51 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 4 of 5.

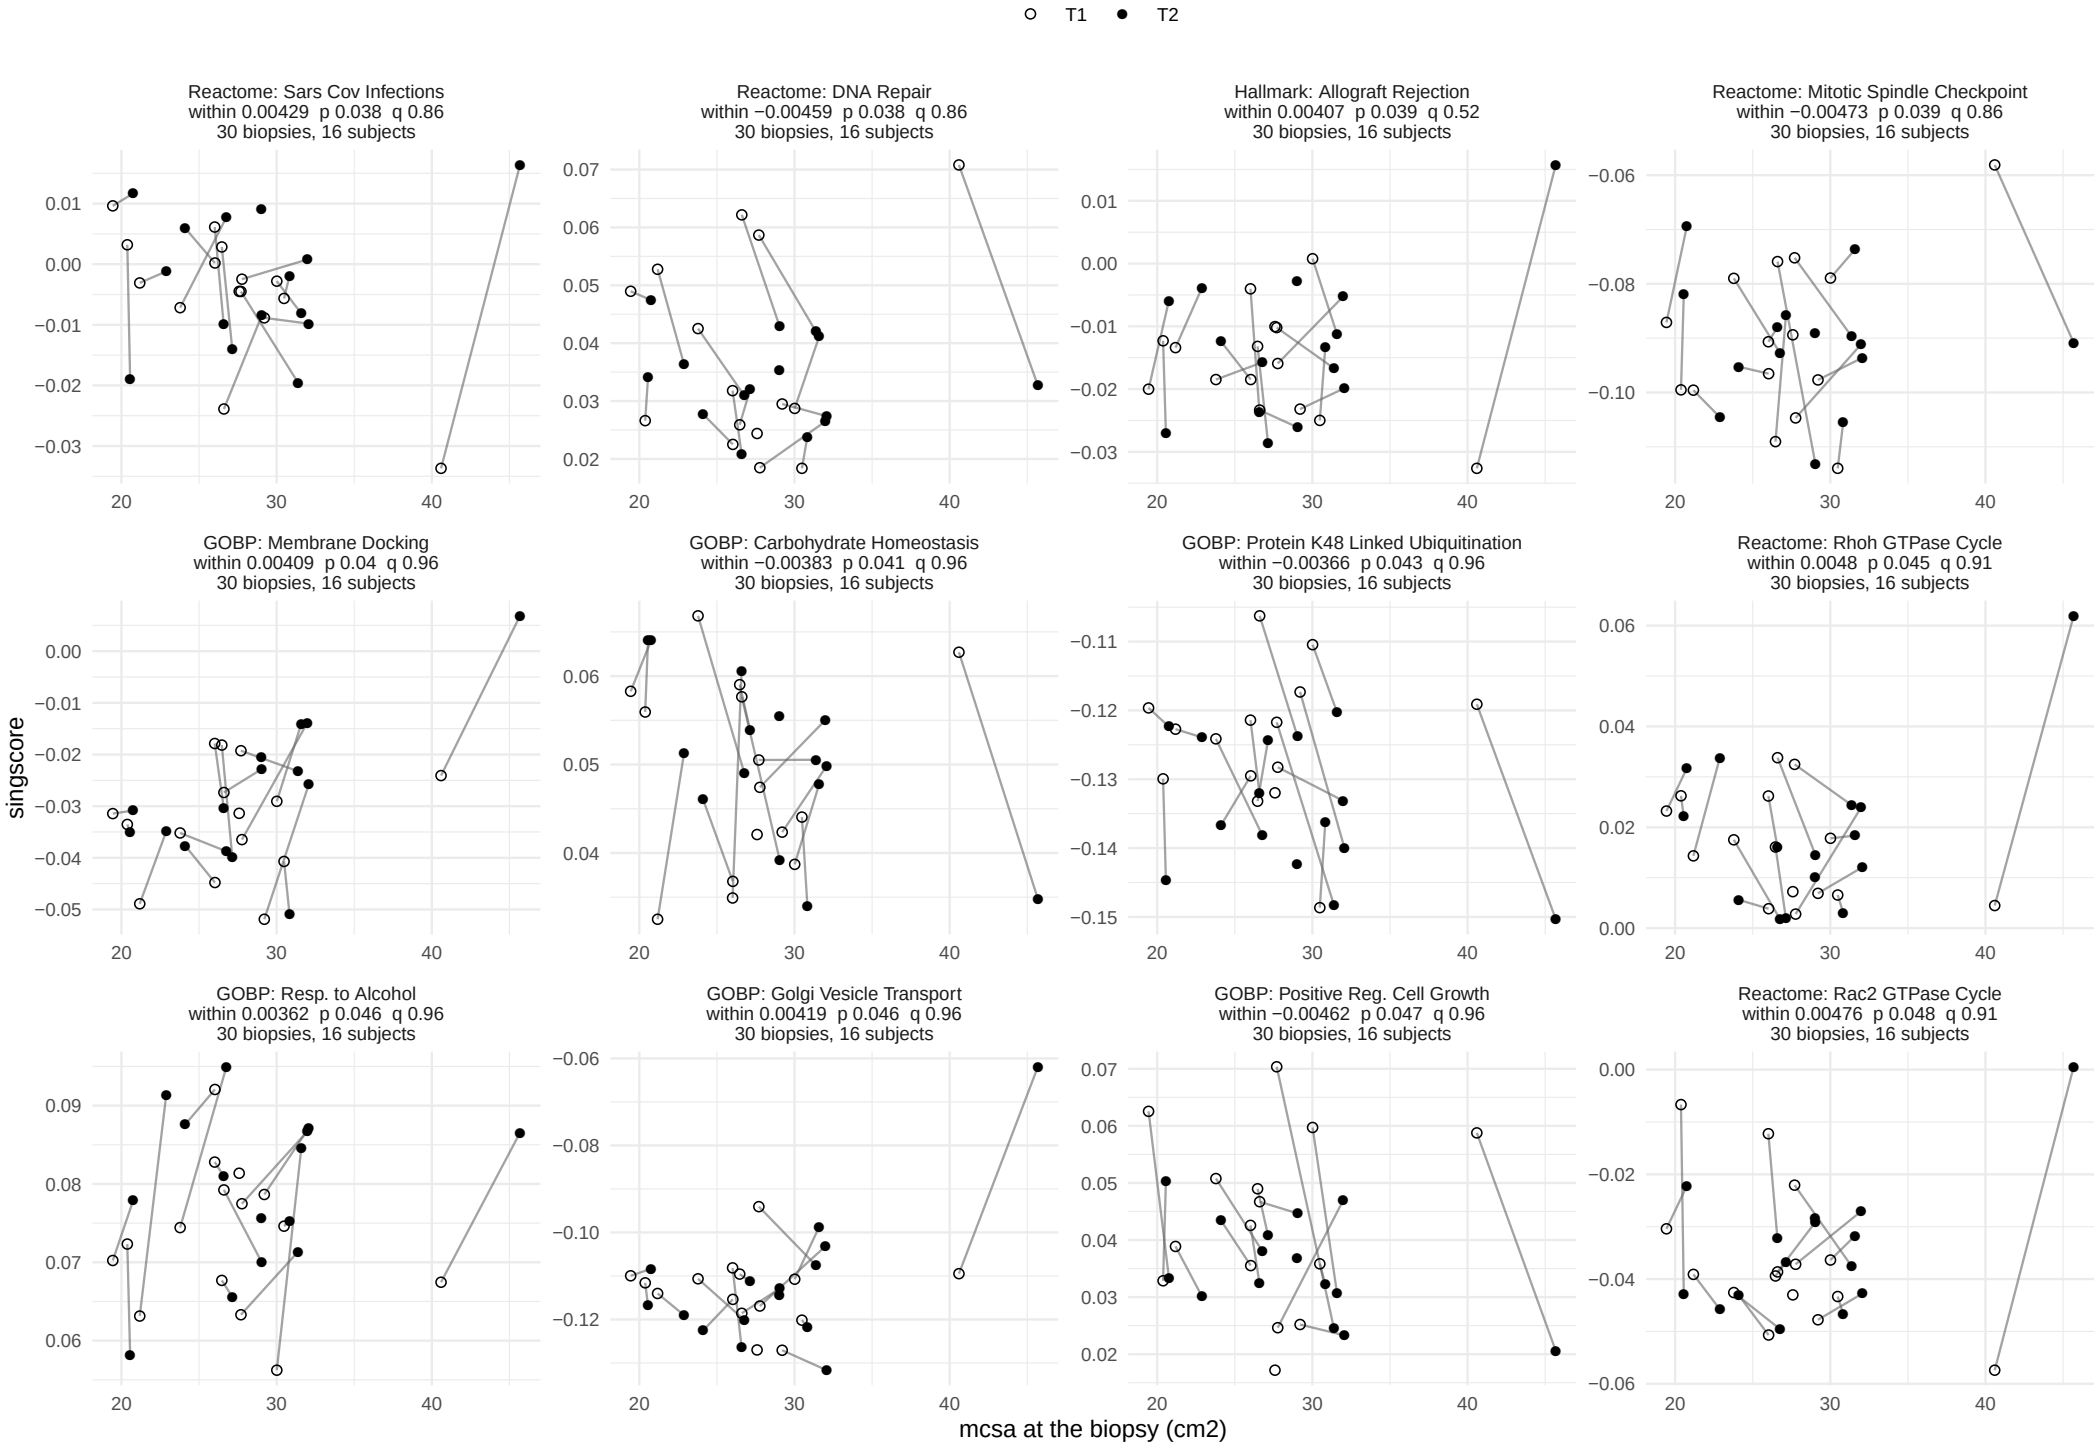

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/02_sets.xlsx, model.

mcsa, within−person term


51 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 5 of 5.

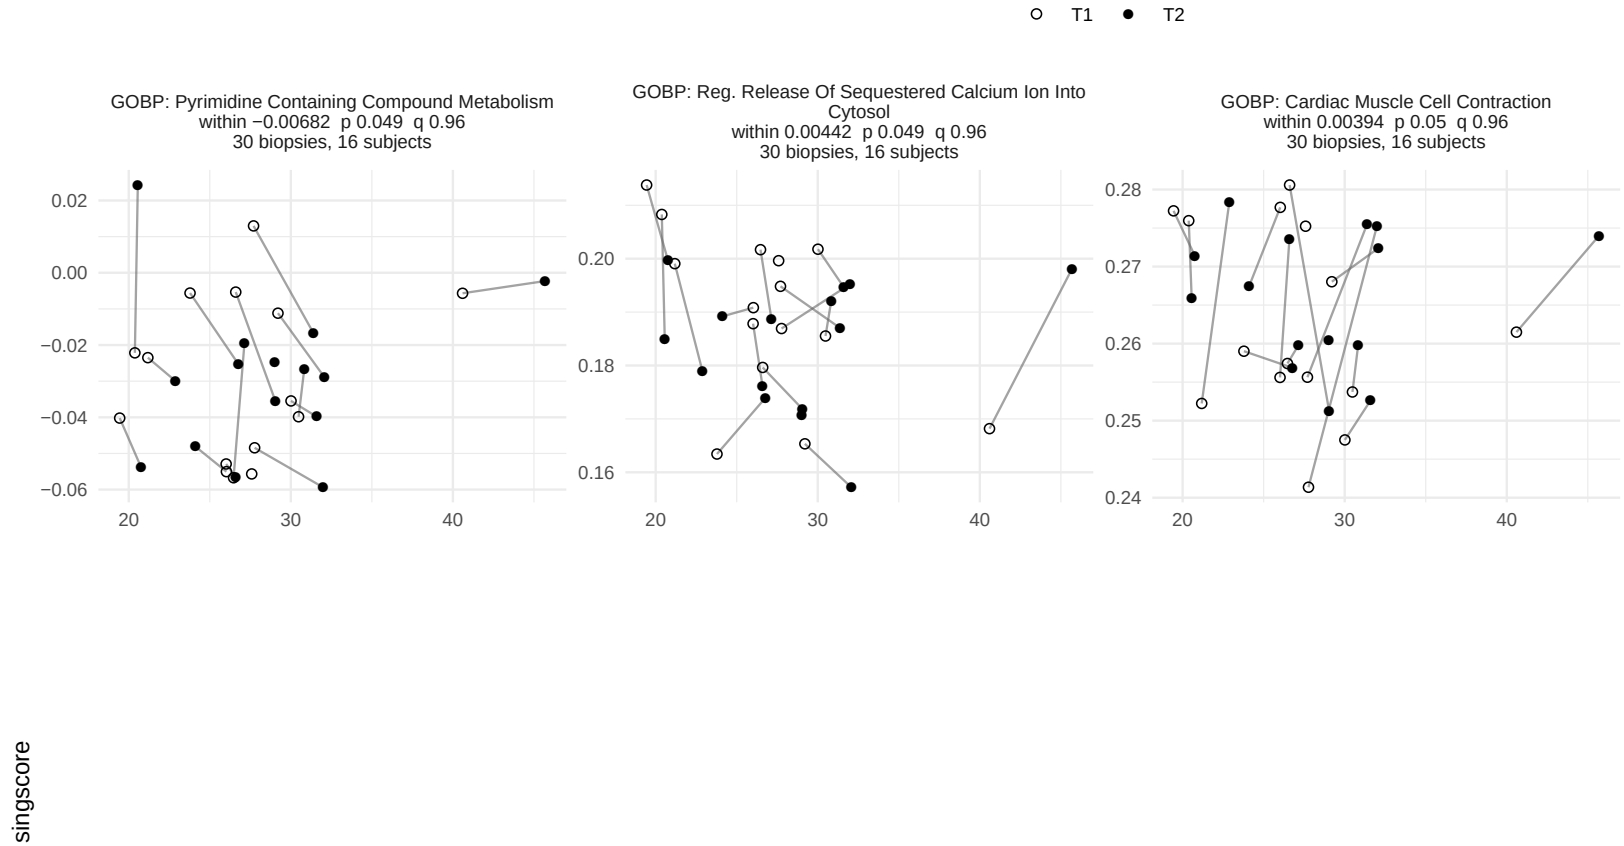

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/02_sets.xlsx, model.

mcsa, between−person term


76 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 1 of 7.

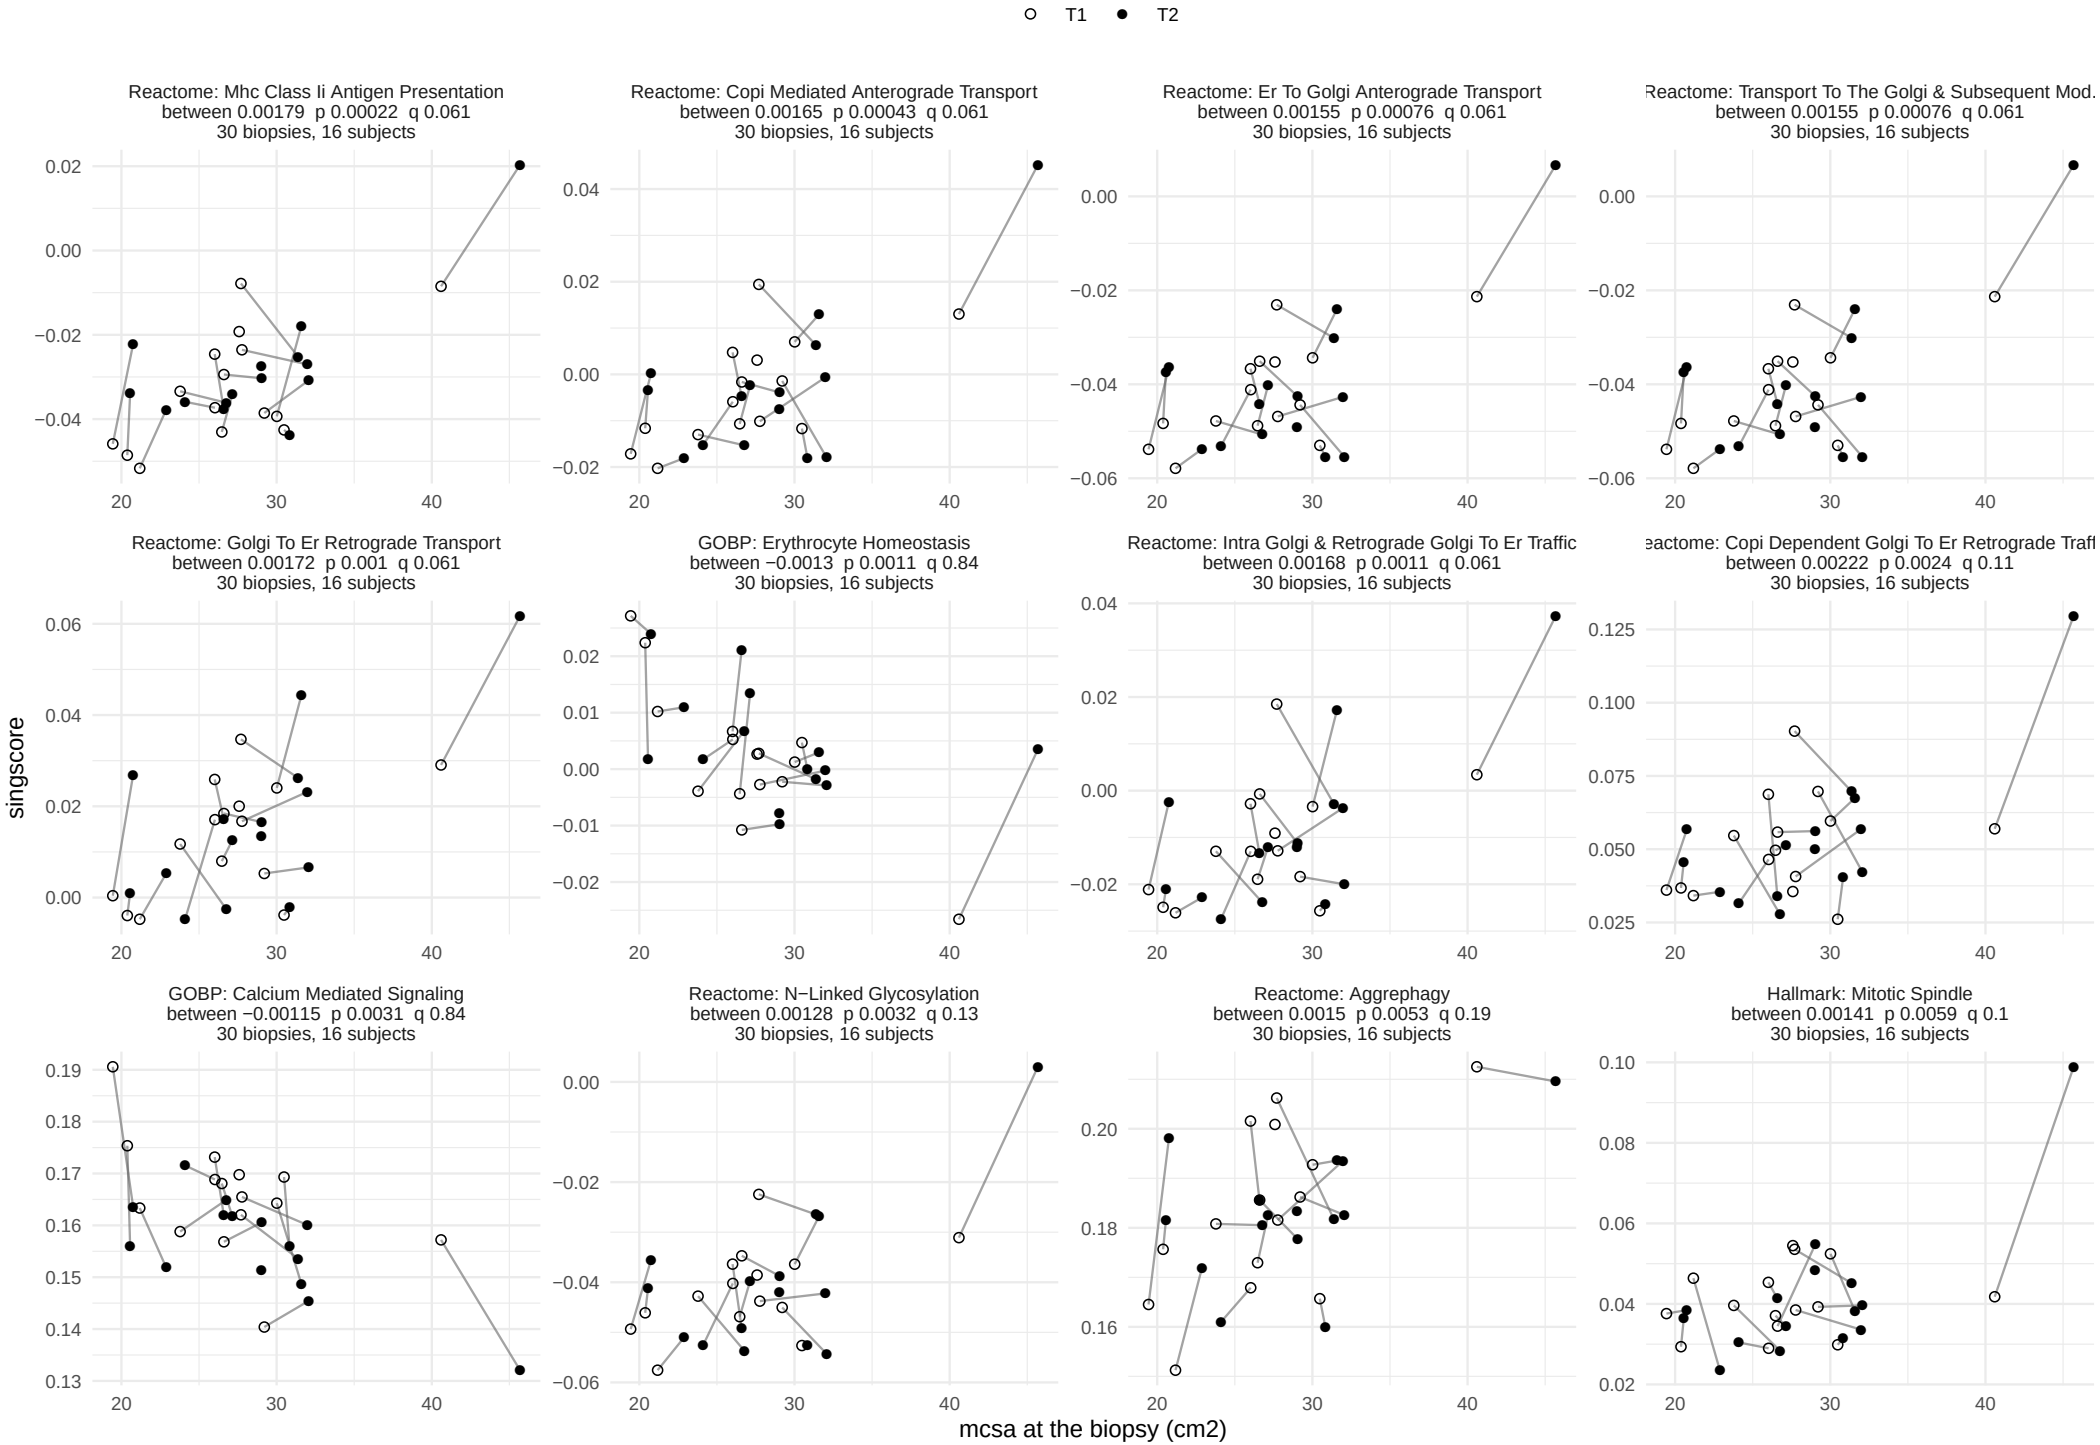

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/02_sets.xlsx, model.

mcsa, between−person term


76 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 2 of 7.

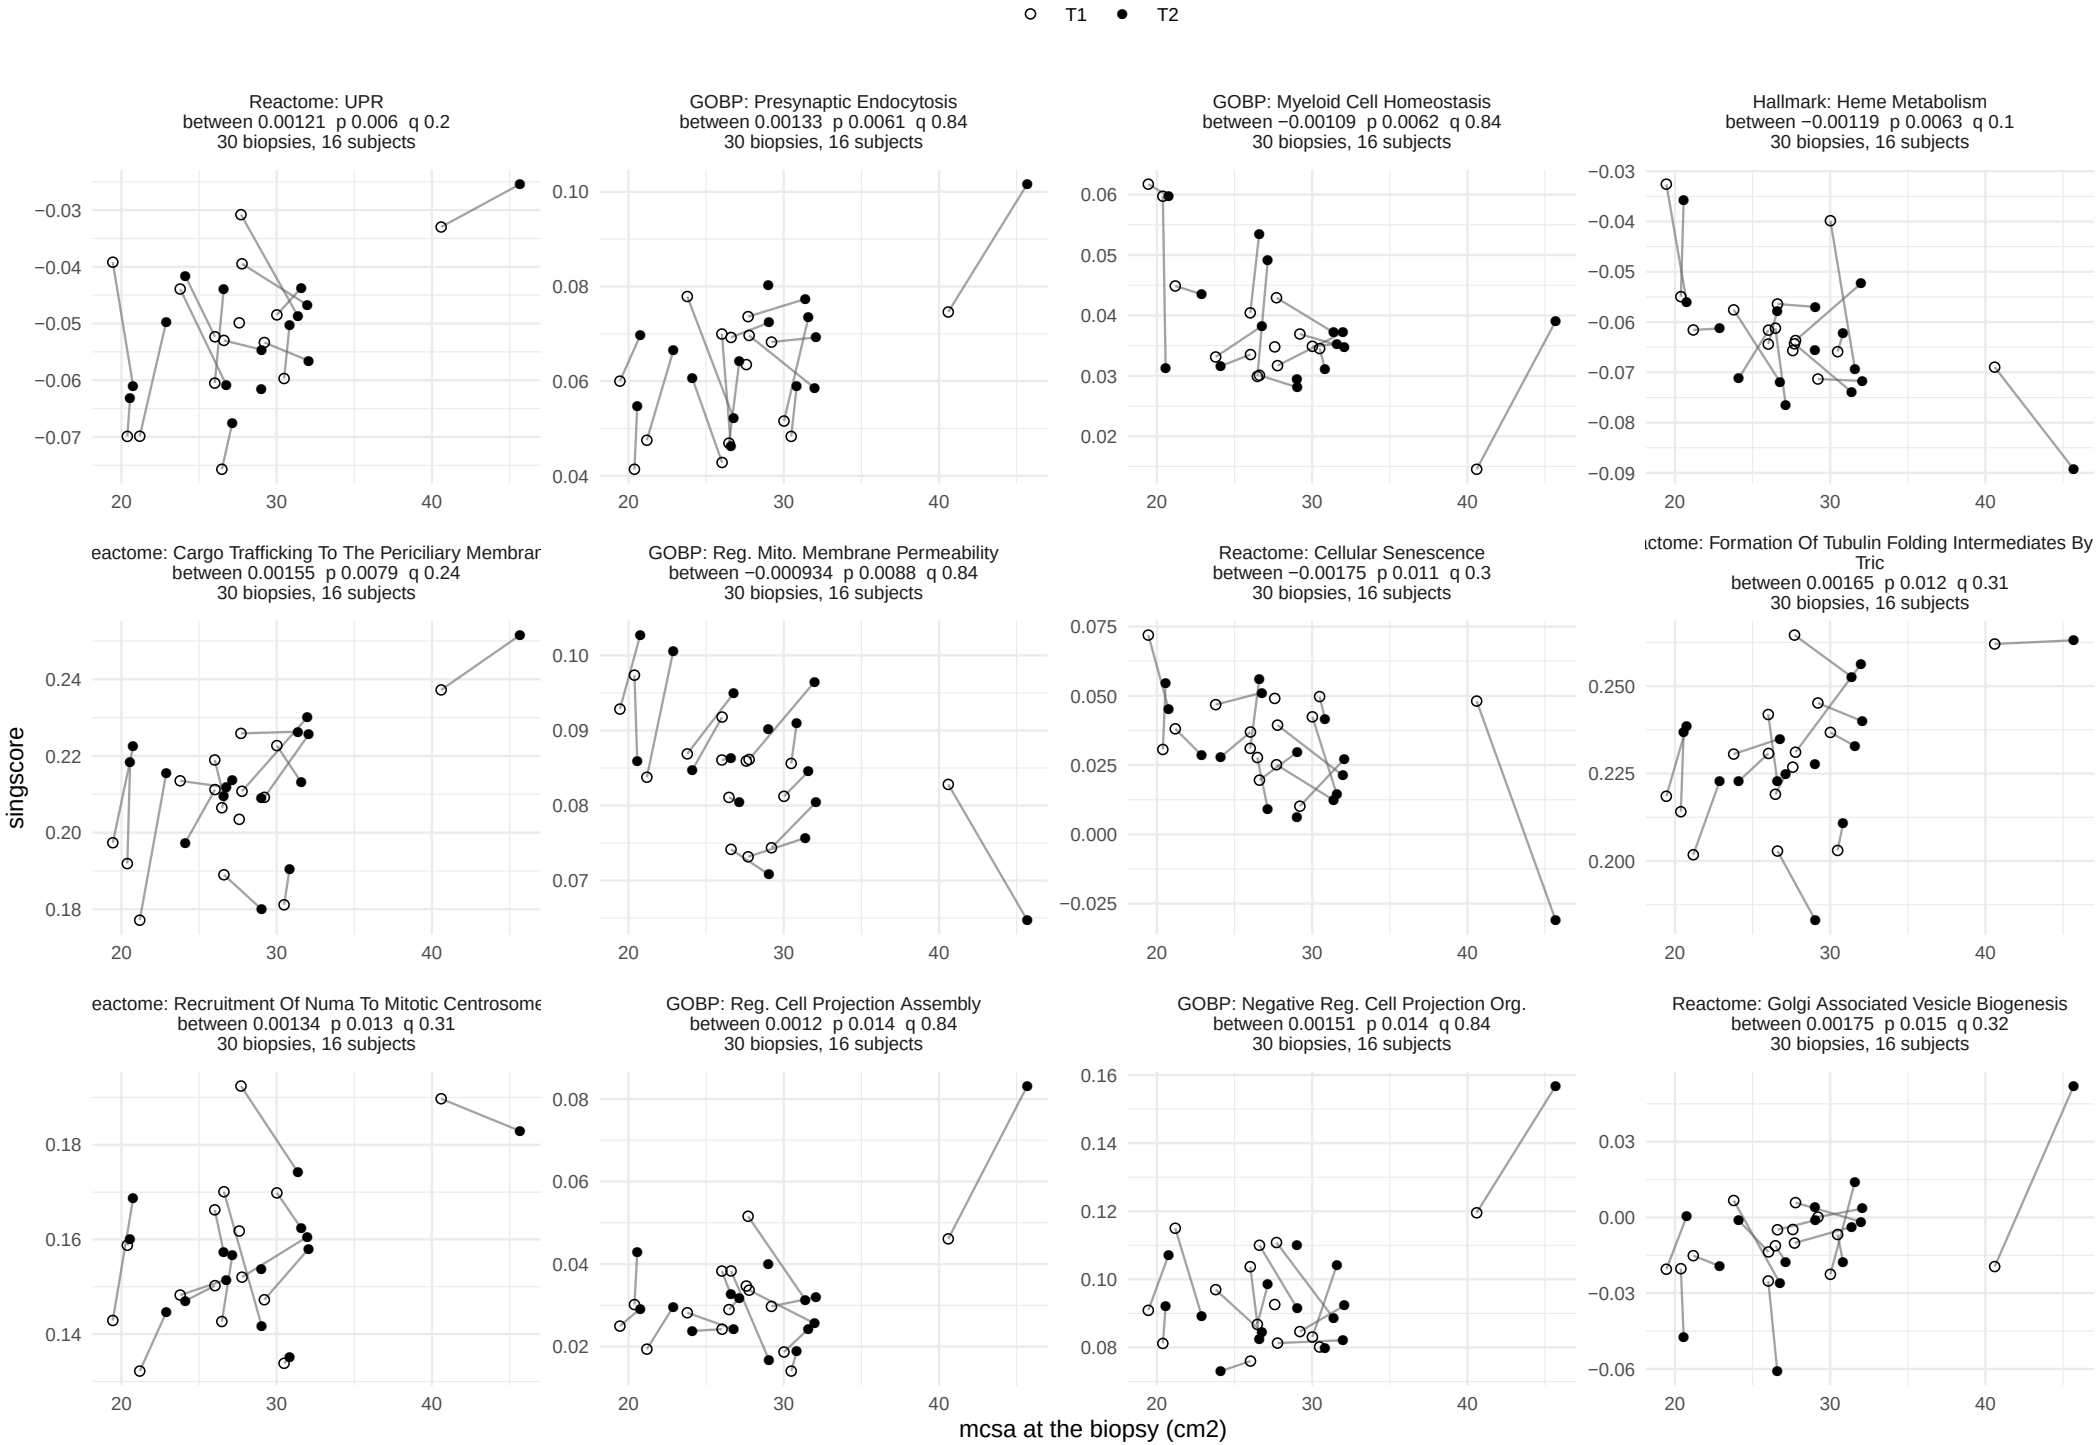

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/02_sets.xlsx, model.


mcsa, between−person term

76 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 3 of 7.

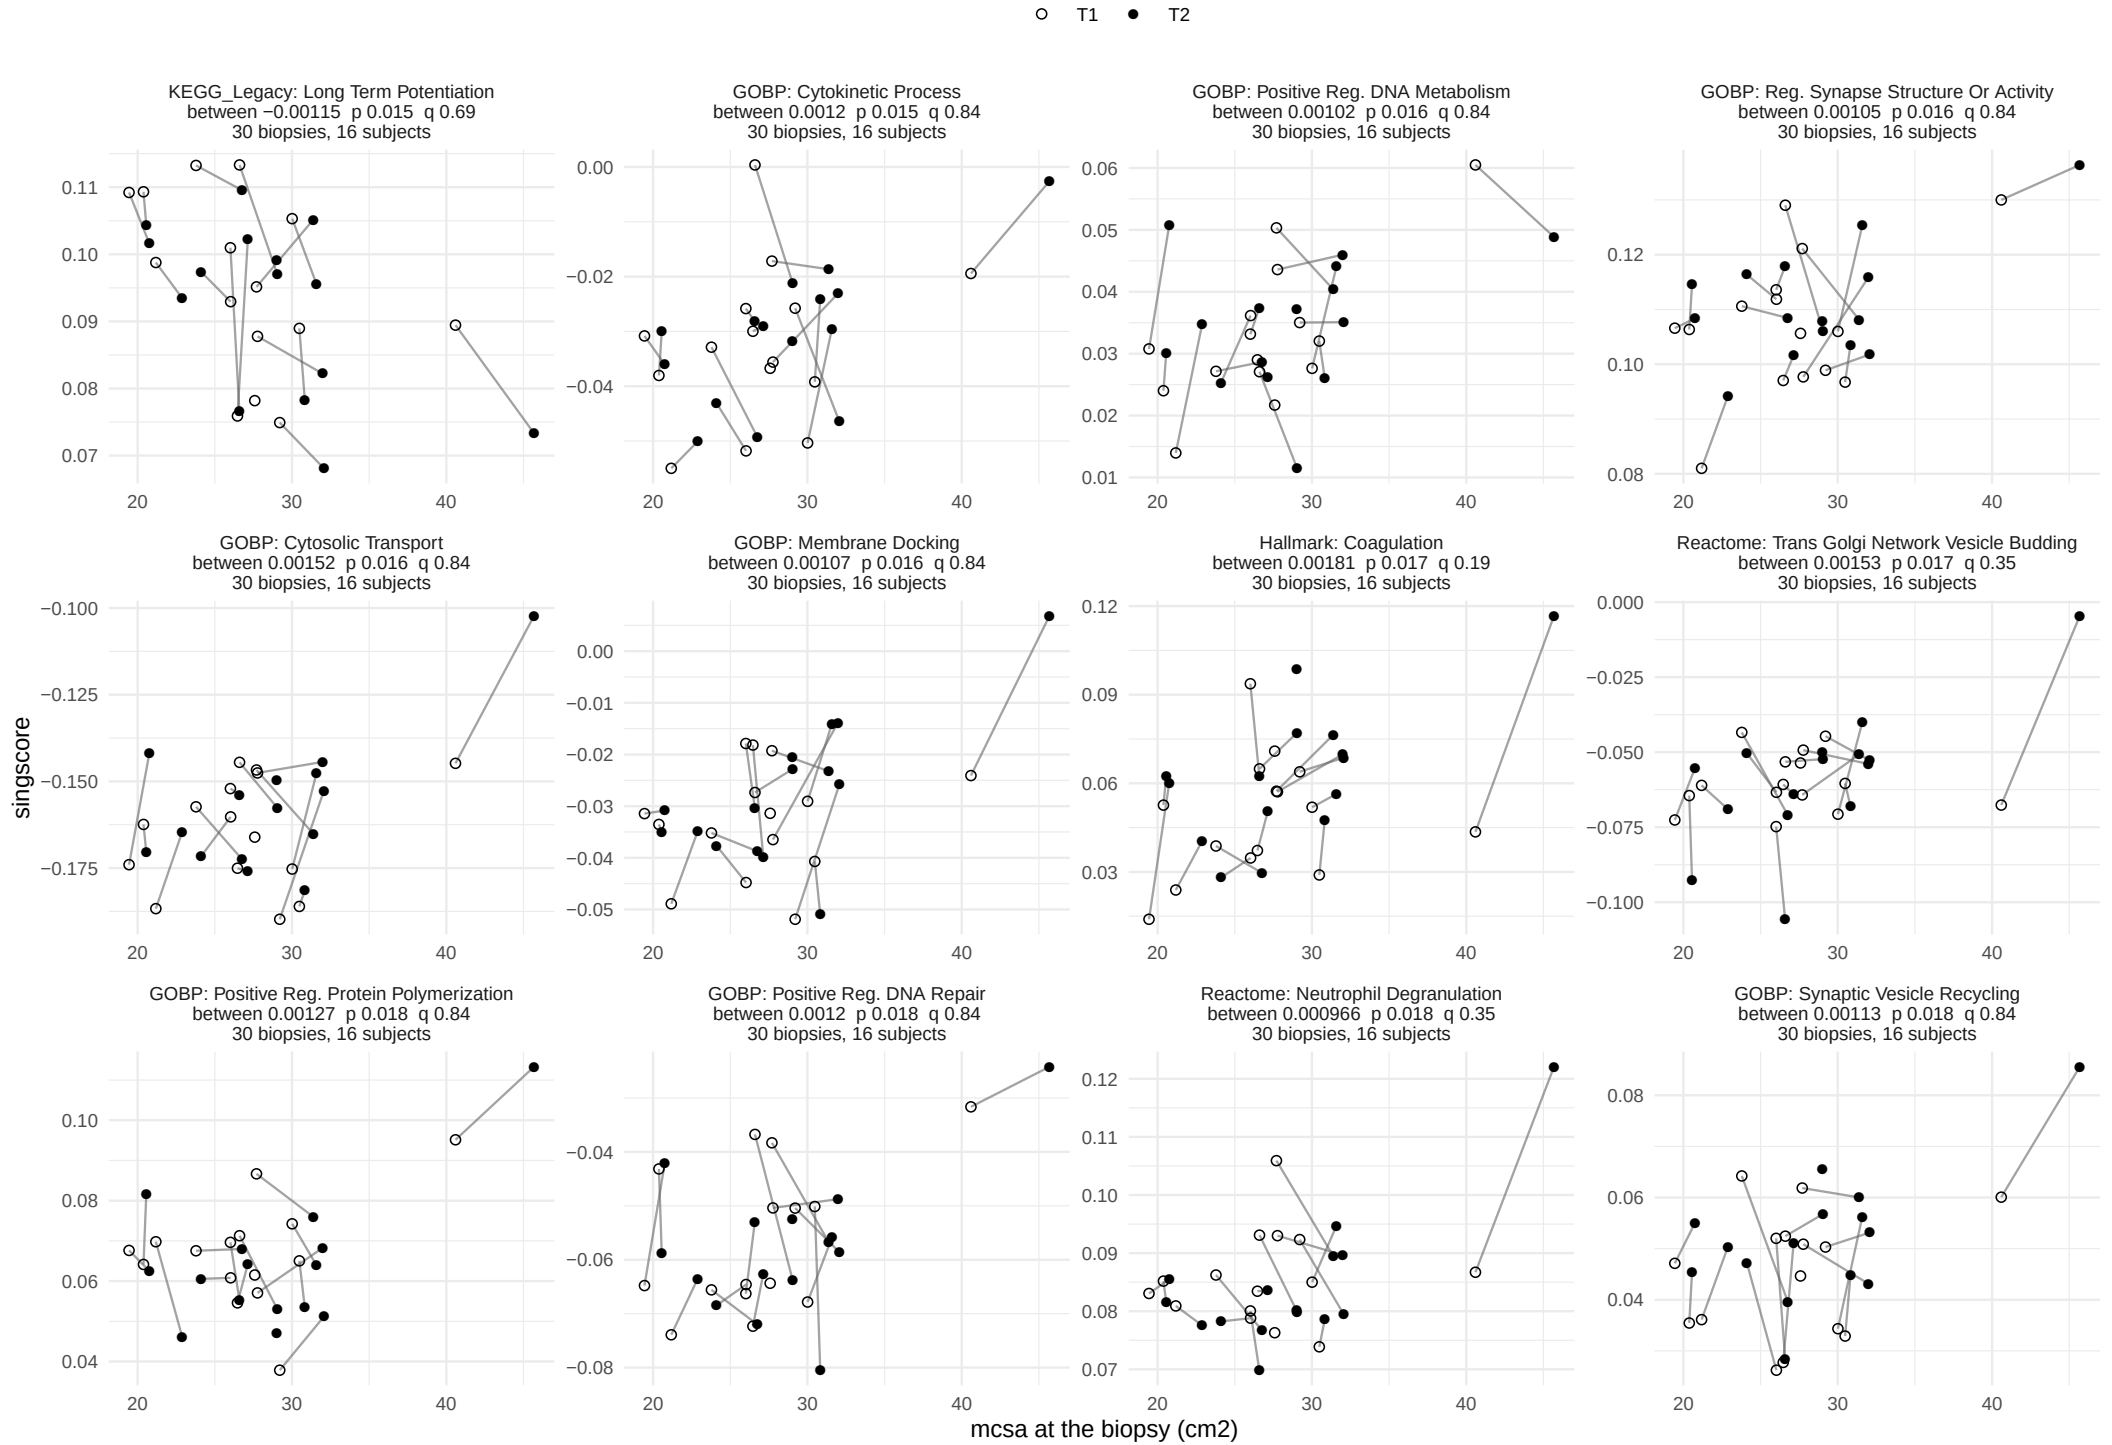

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/02_sets.xlsx, model.


mcsa, between−person term

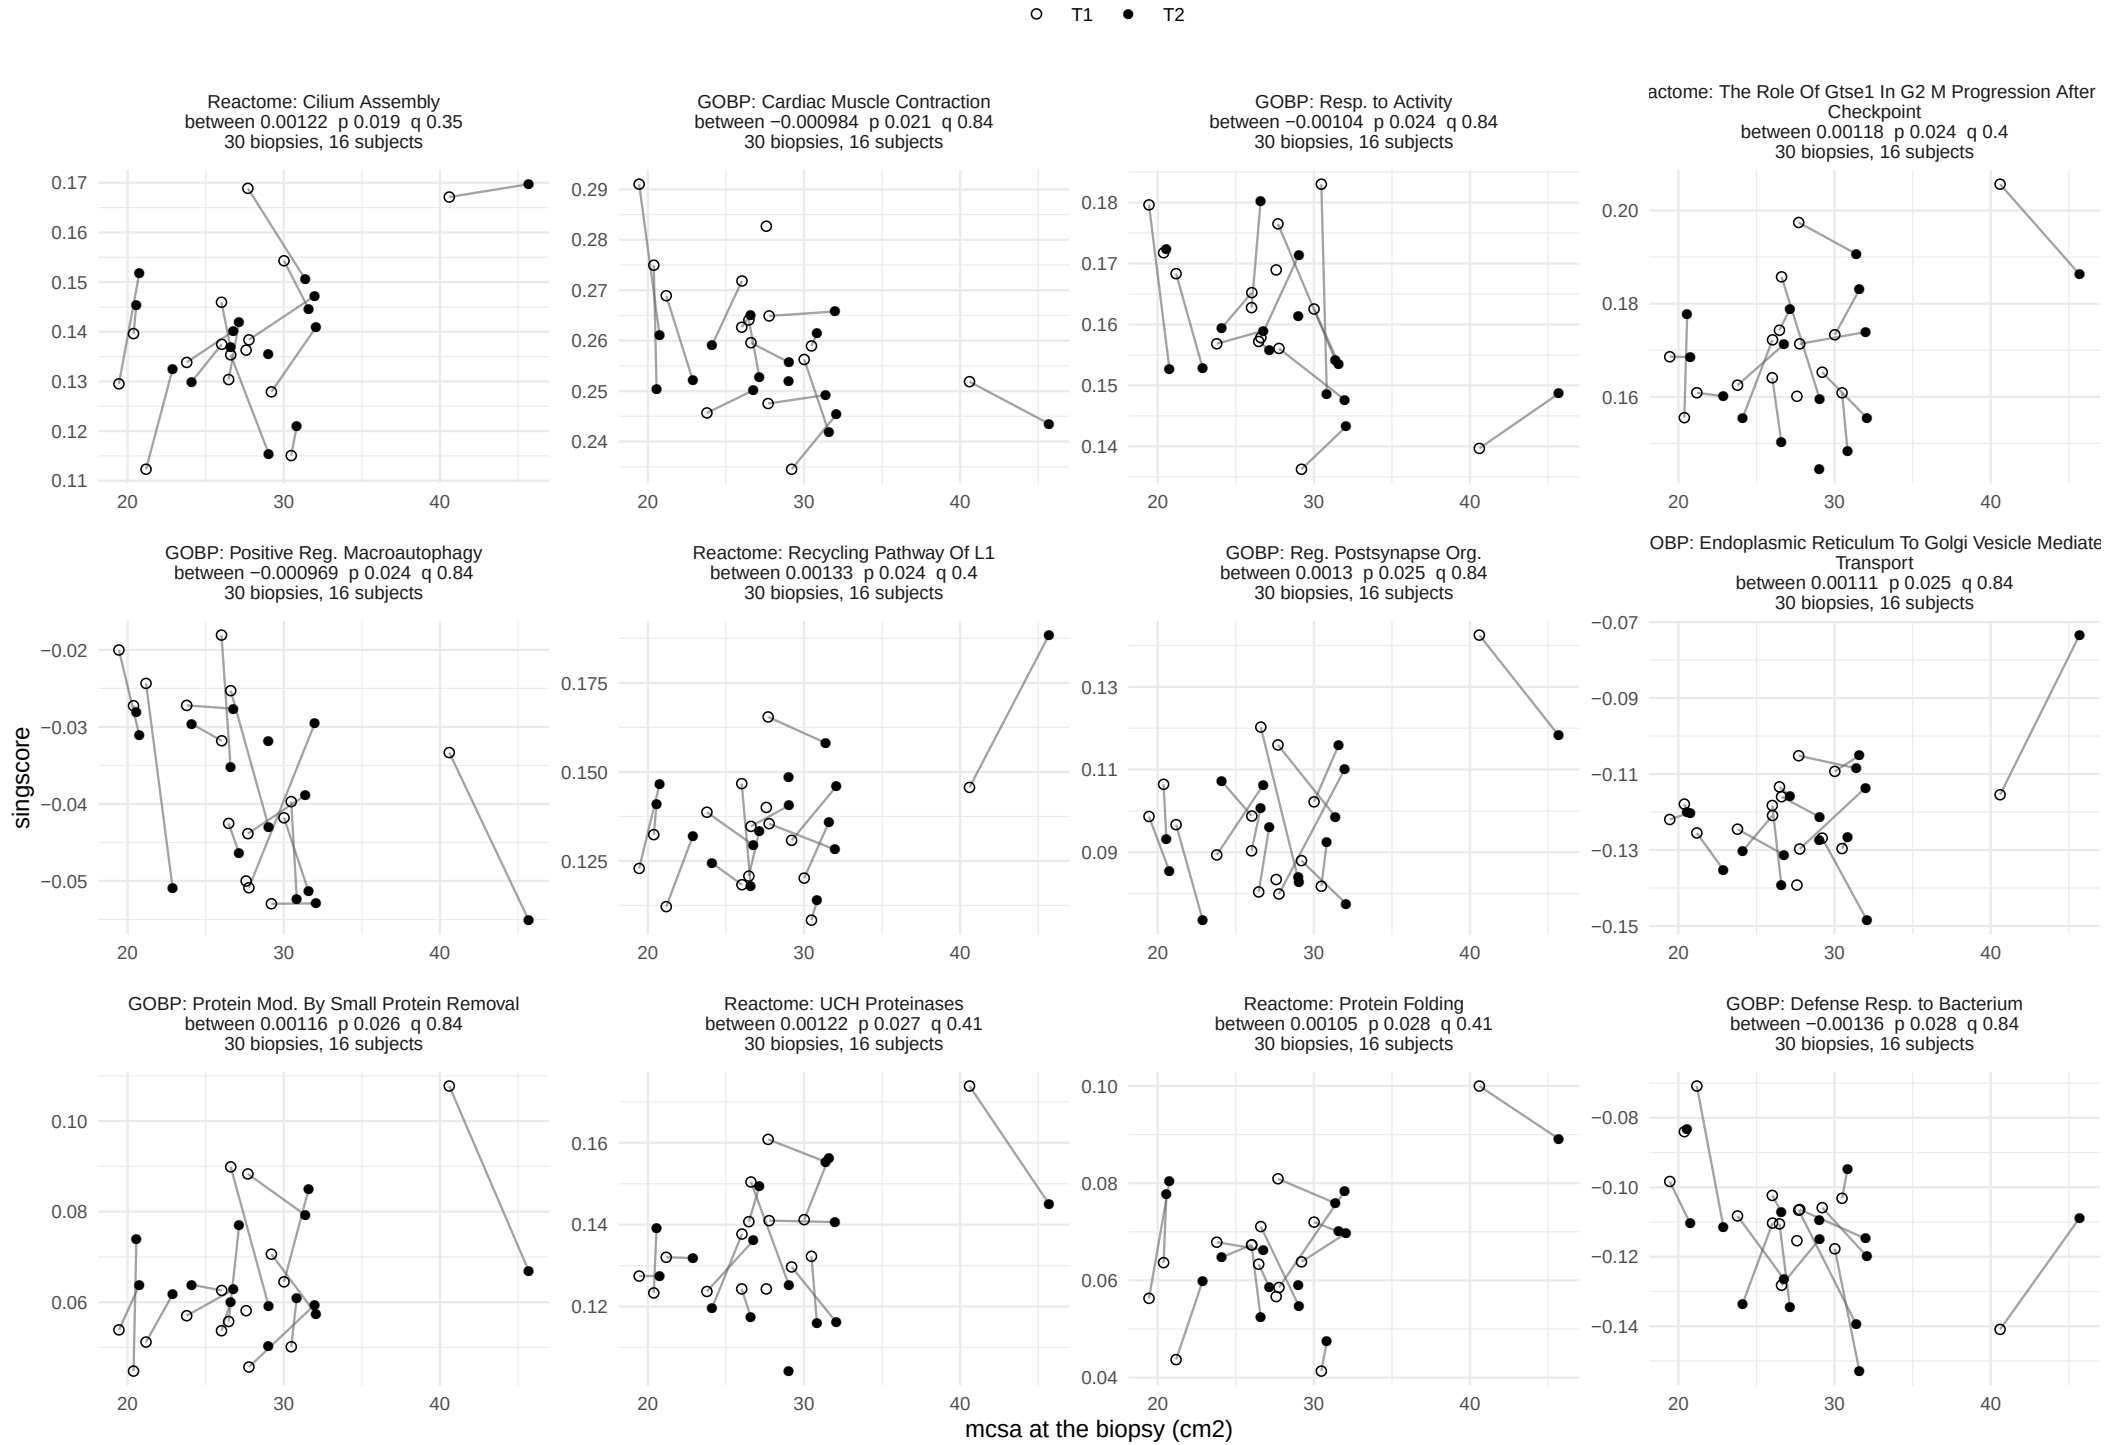

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/02_sets.xlsx, model.


mcsa, between−person term

76 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 5 of 7.

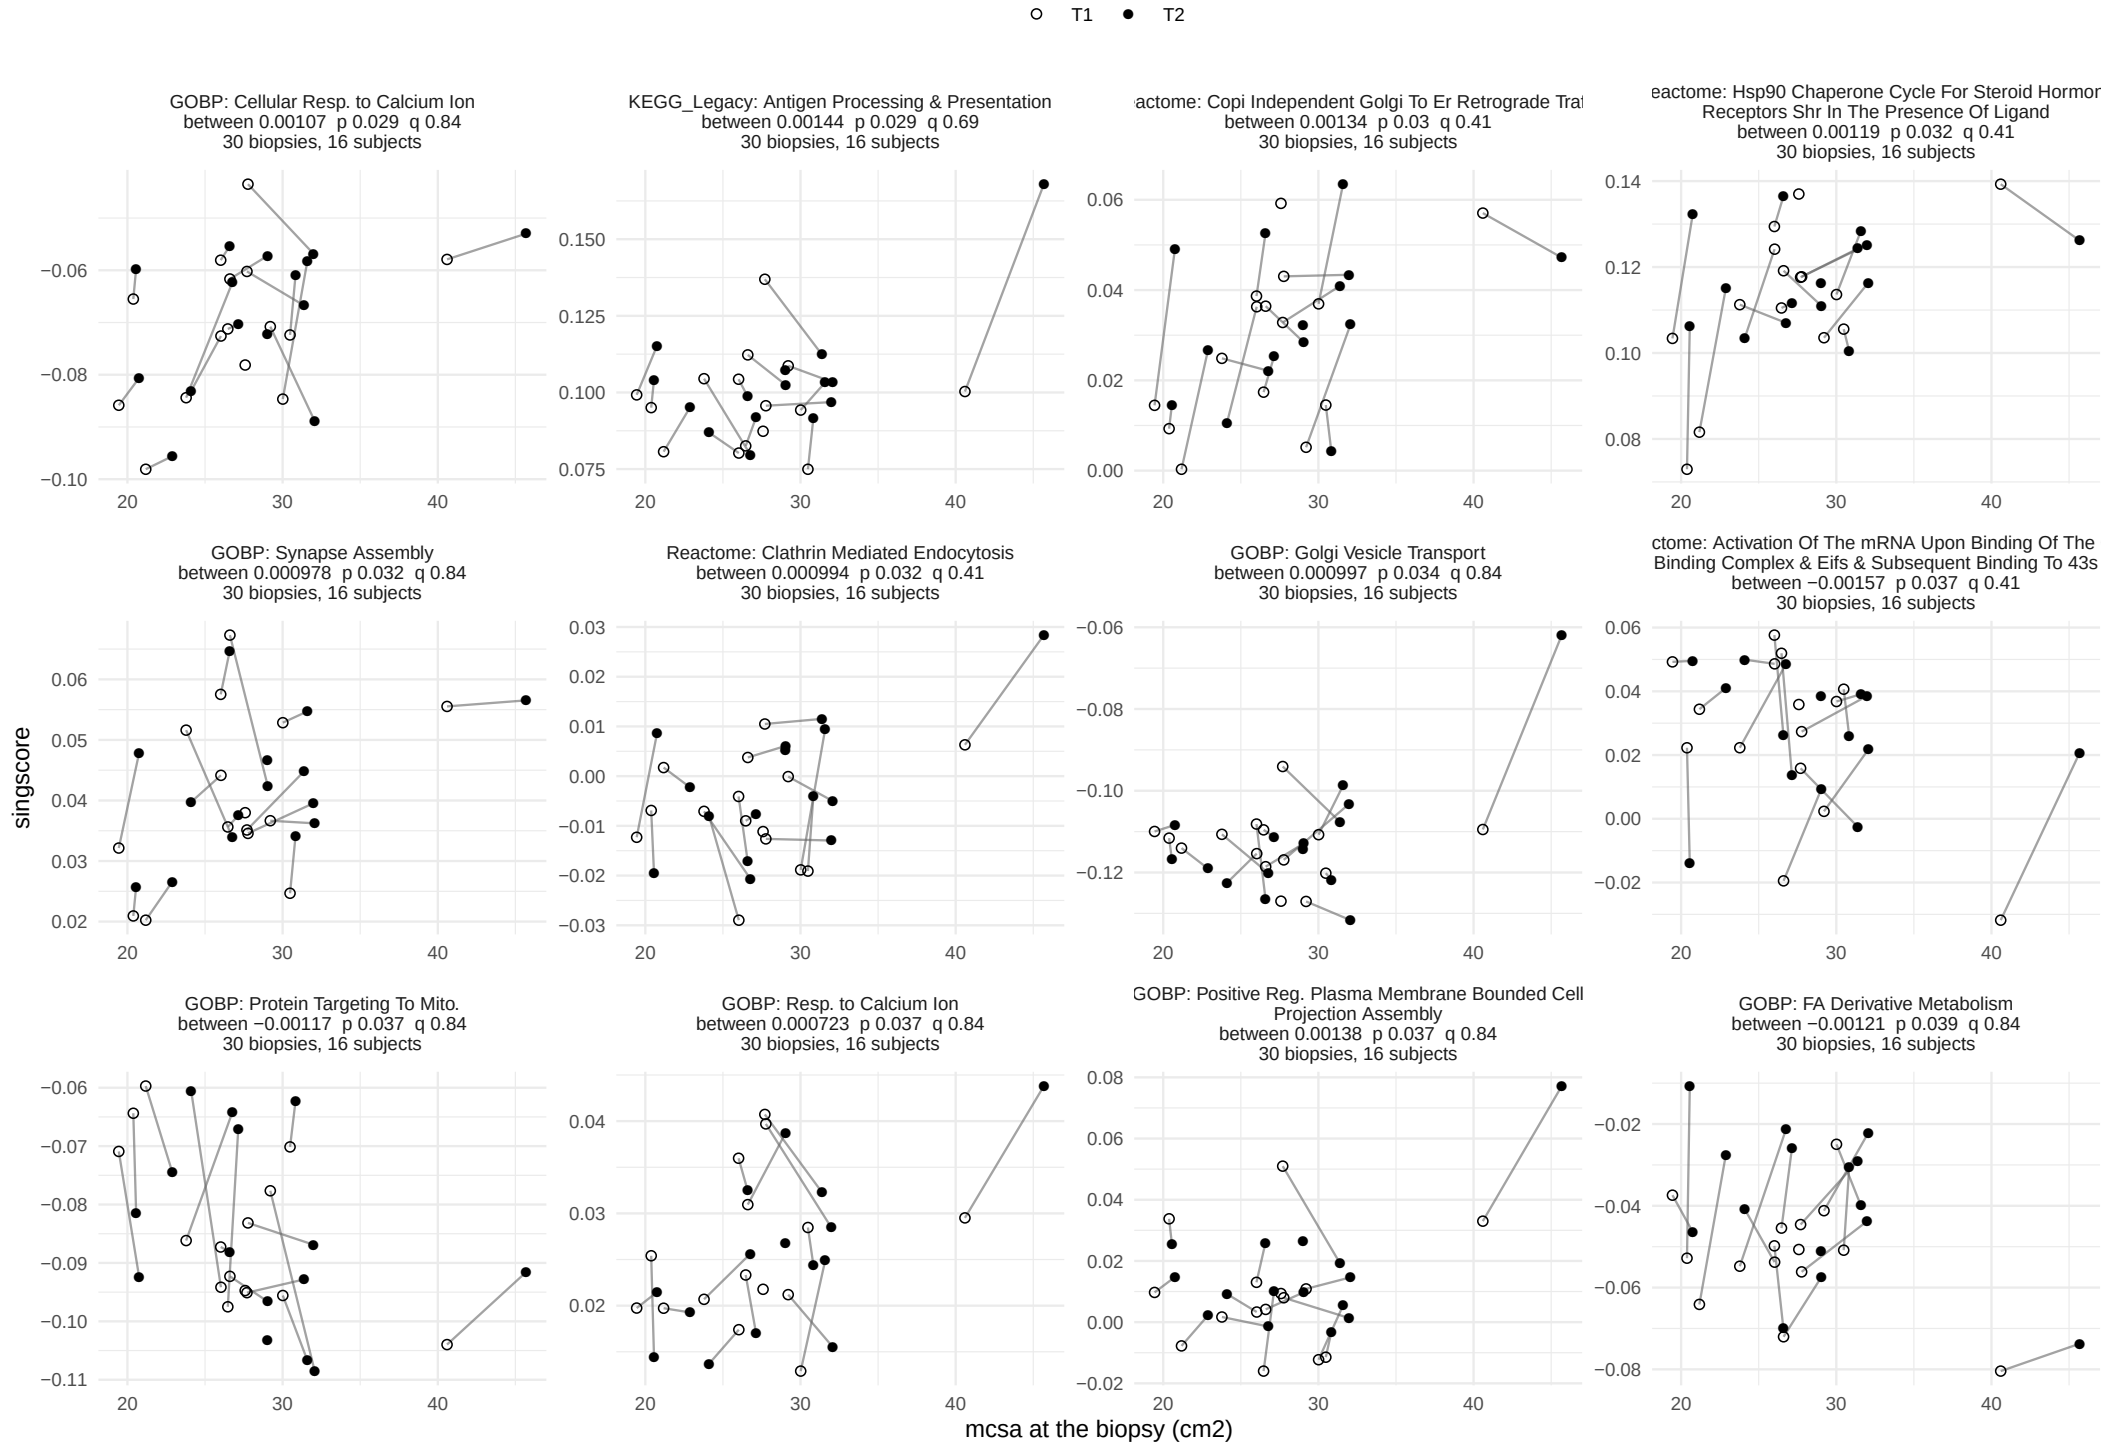

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/02_sets.xlsx, model.


mcsa, between−person term

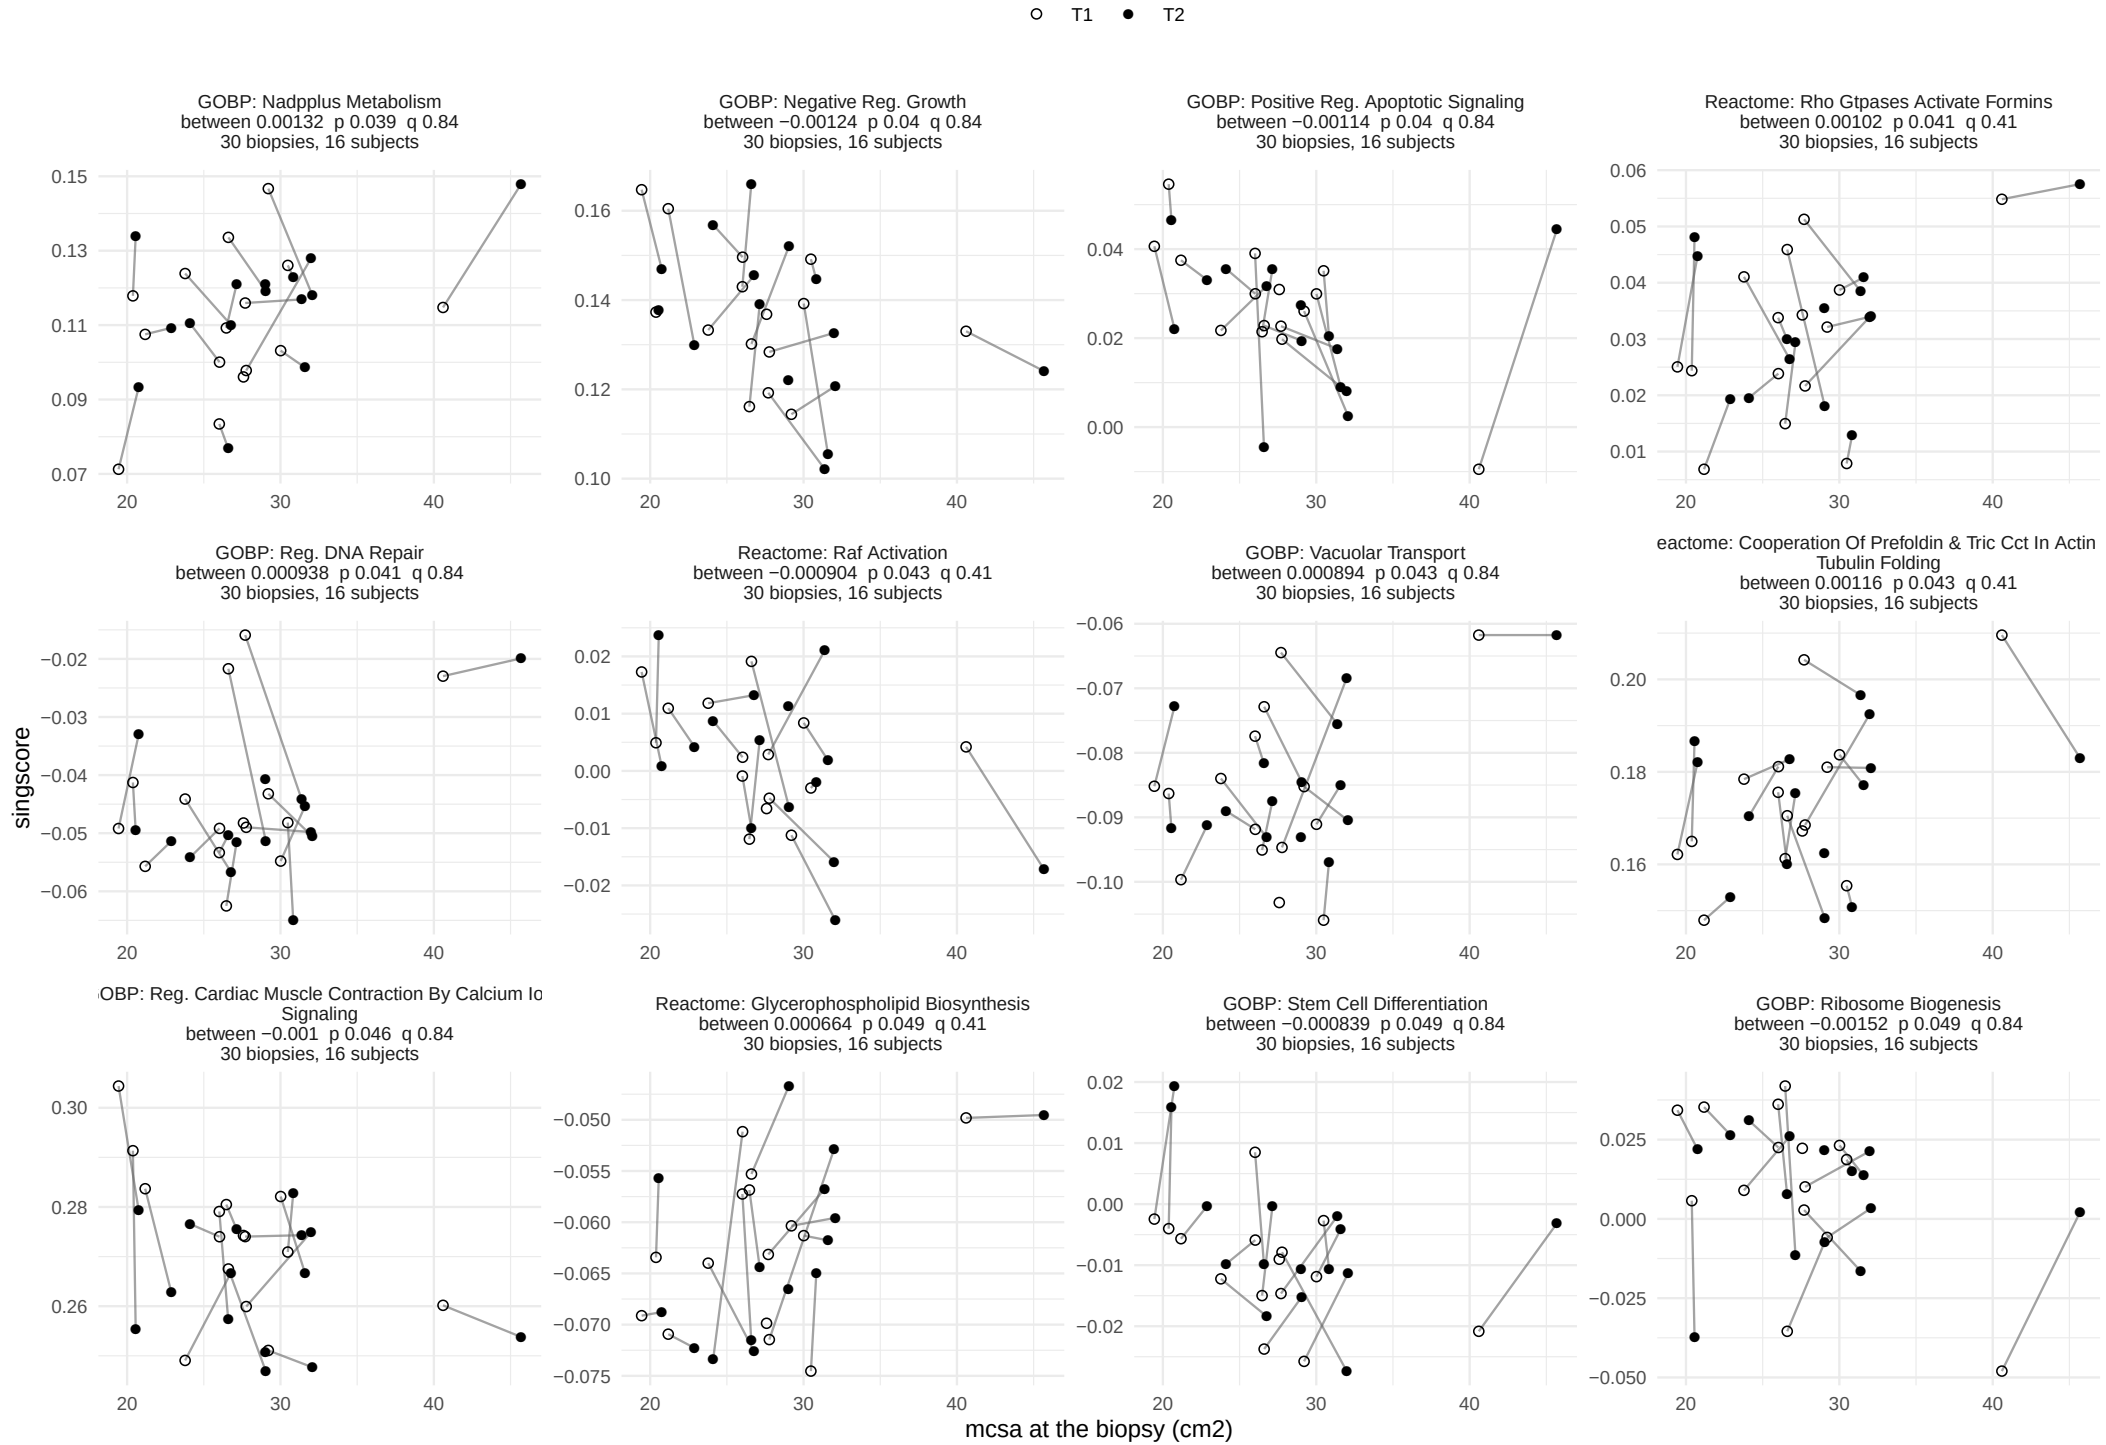

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/02_sets.xlsx, model.

mcsa, between−person term


76 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 7 of 7.

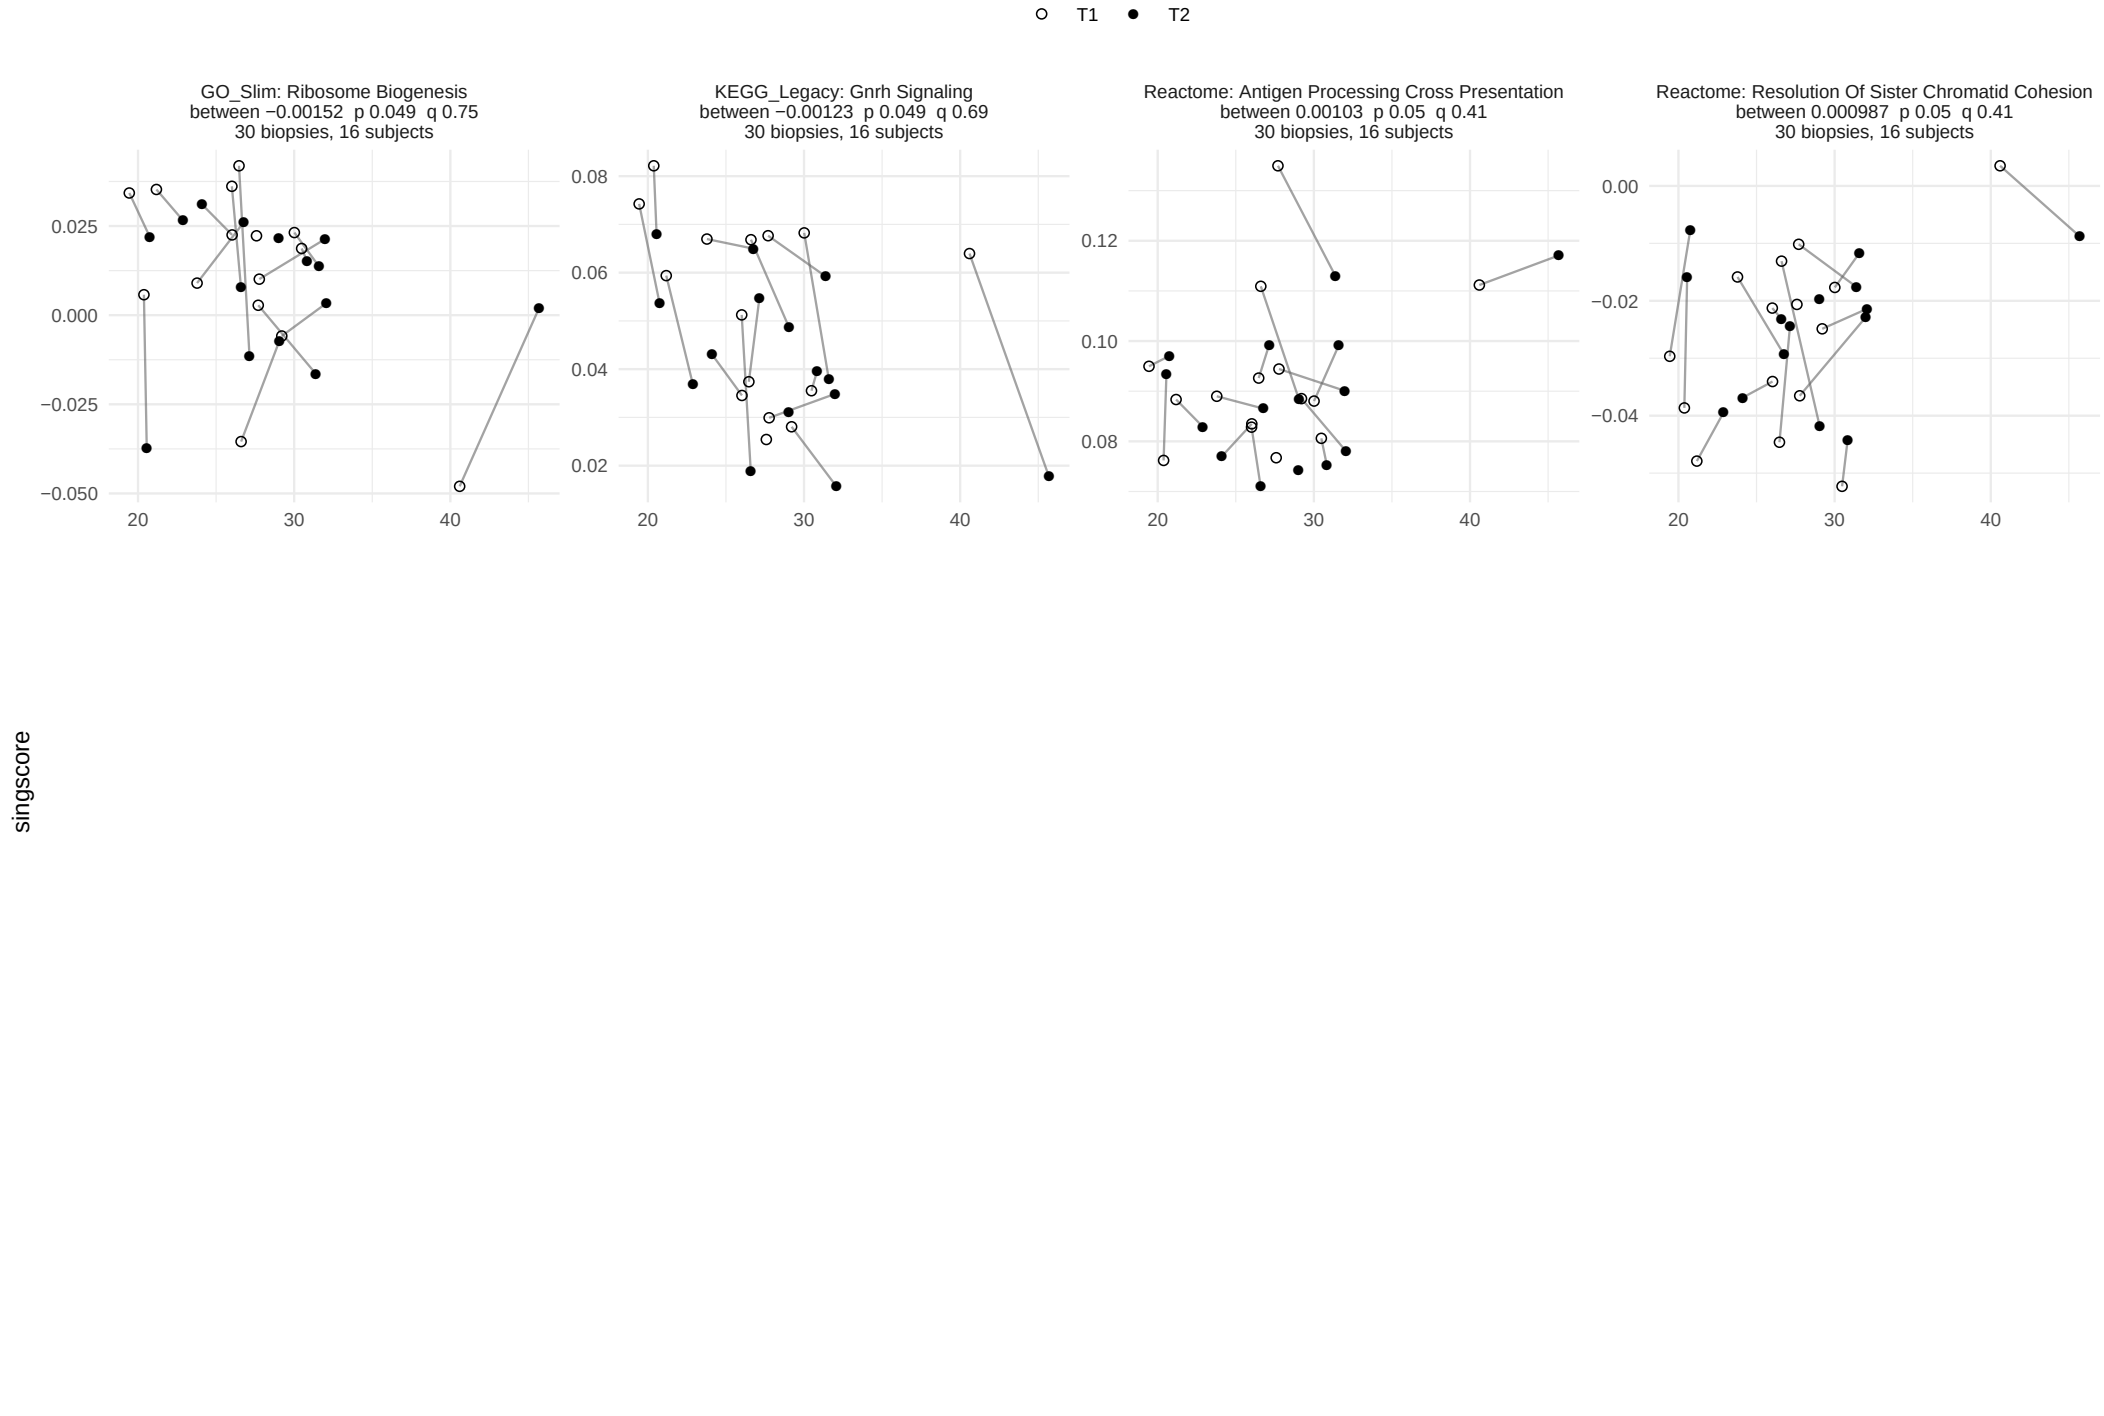

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/02_sets.xlsx, model.

leg_press_1rm, within−person term


49 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 1 of 5.

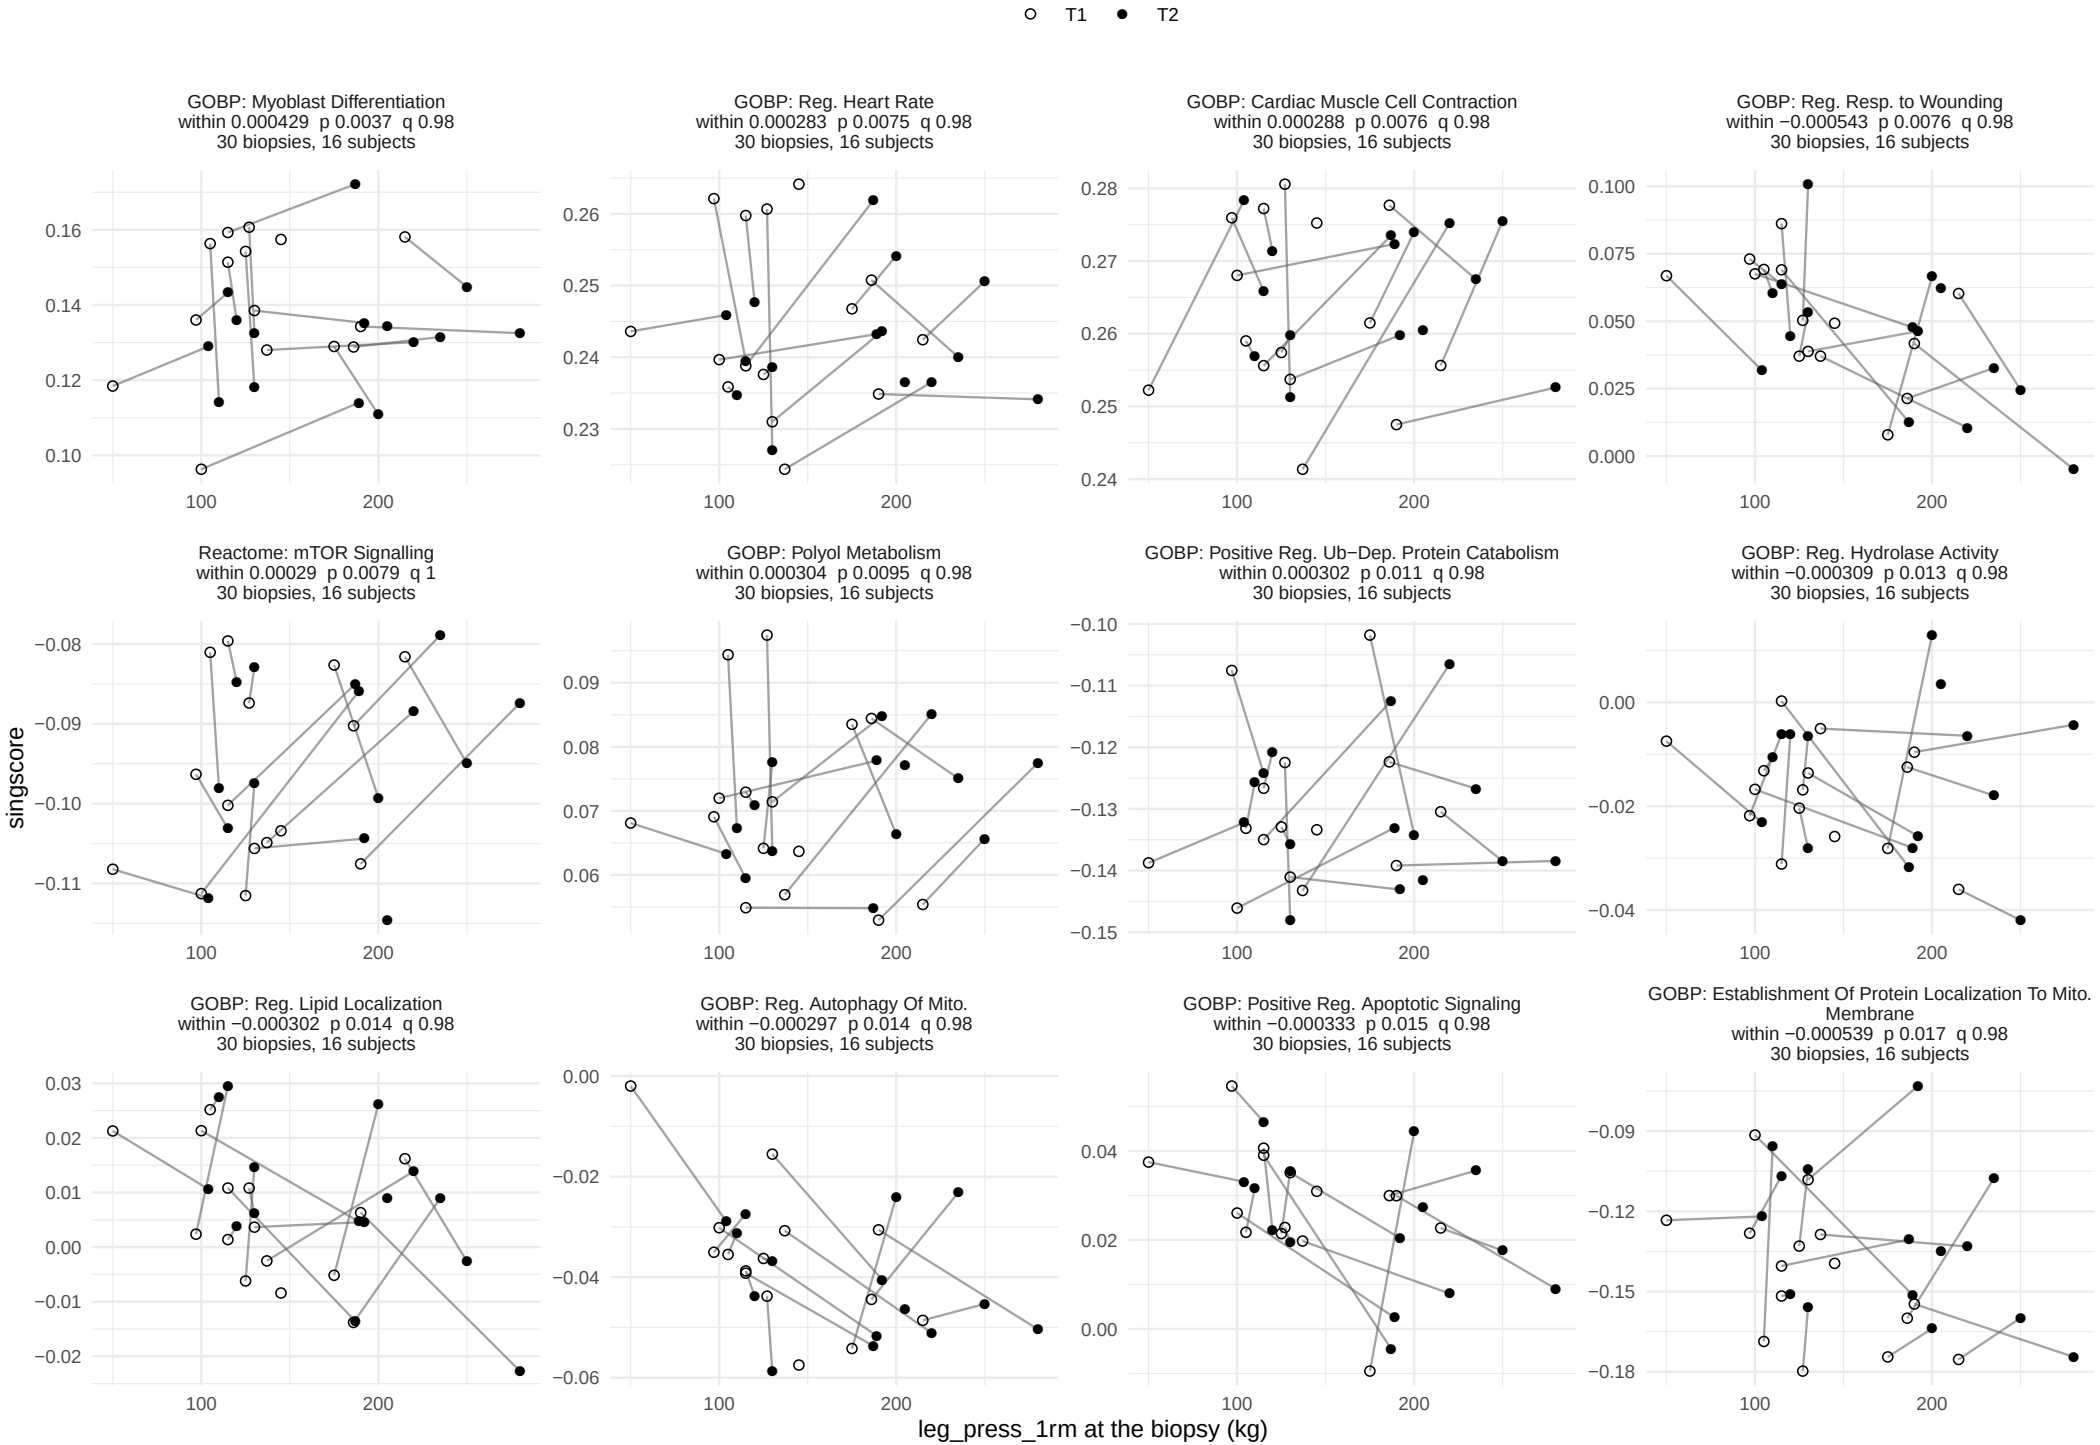

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/02_sets.xlsx, model.

leg_press_1rm, within−person term


49 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 2 of 5.

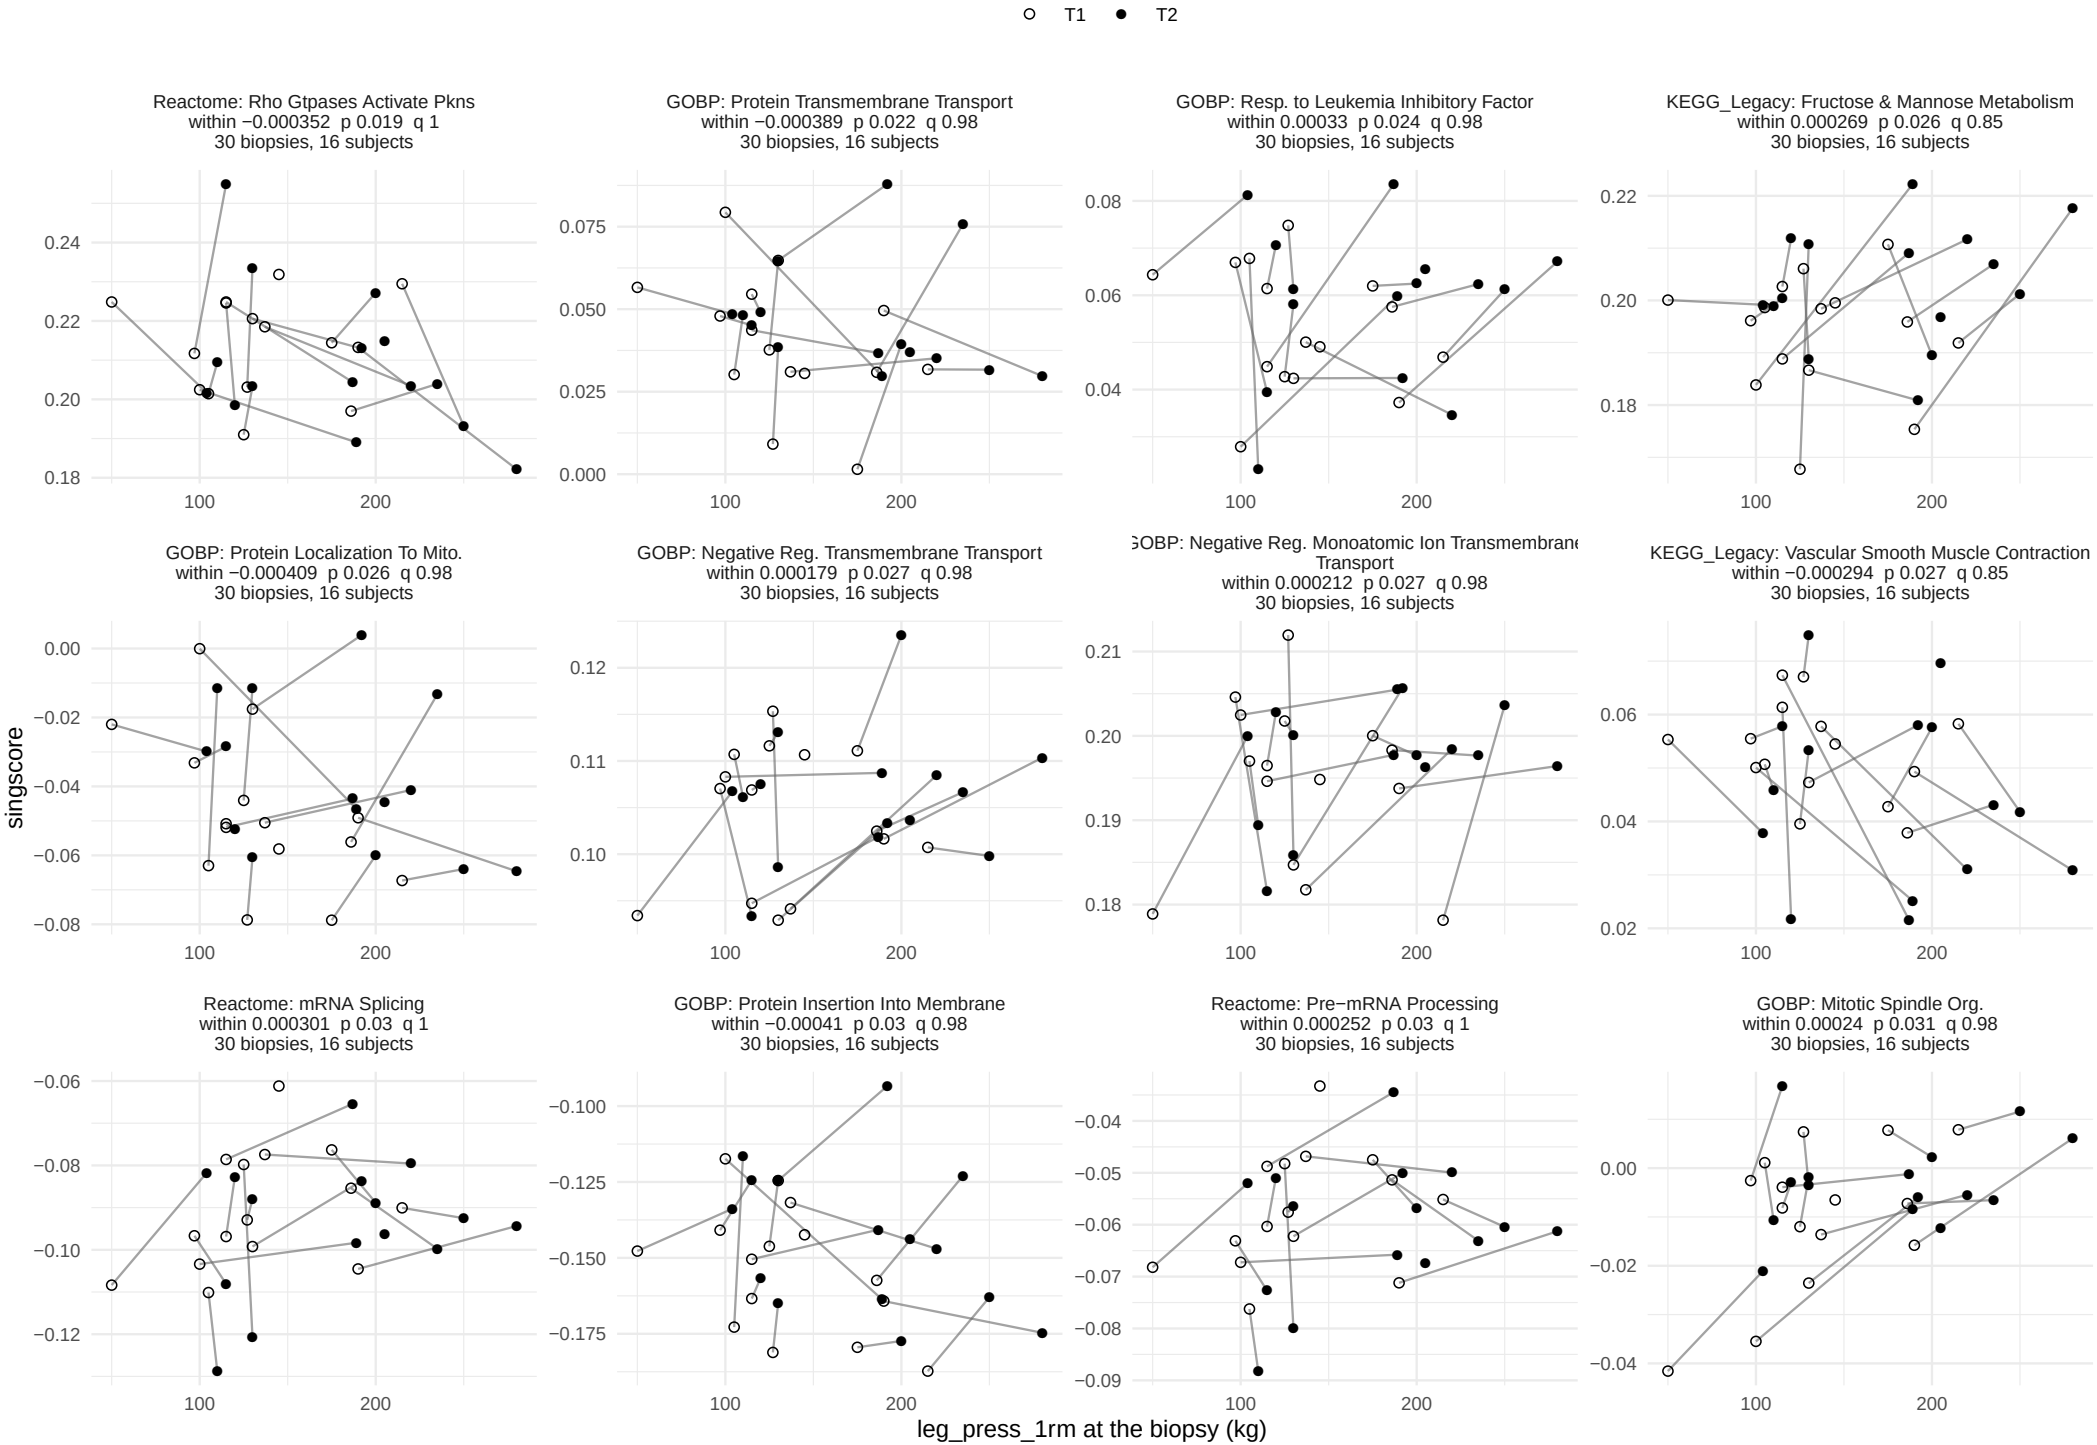

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/02_sets.xlsx, model.

leg_press_1rm, within−person term


49 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 3 of 5.

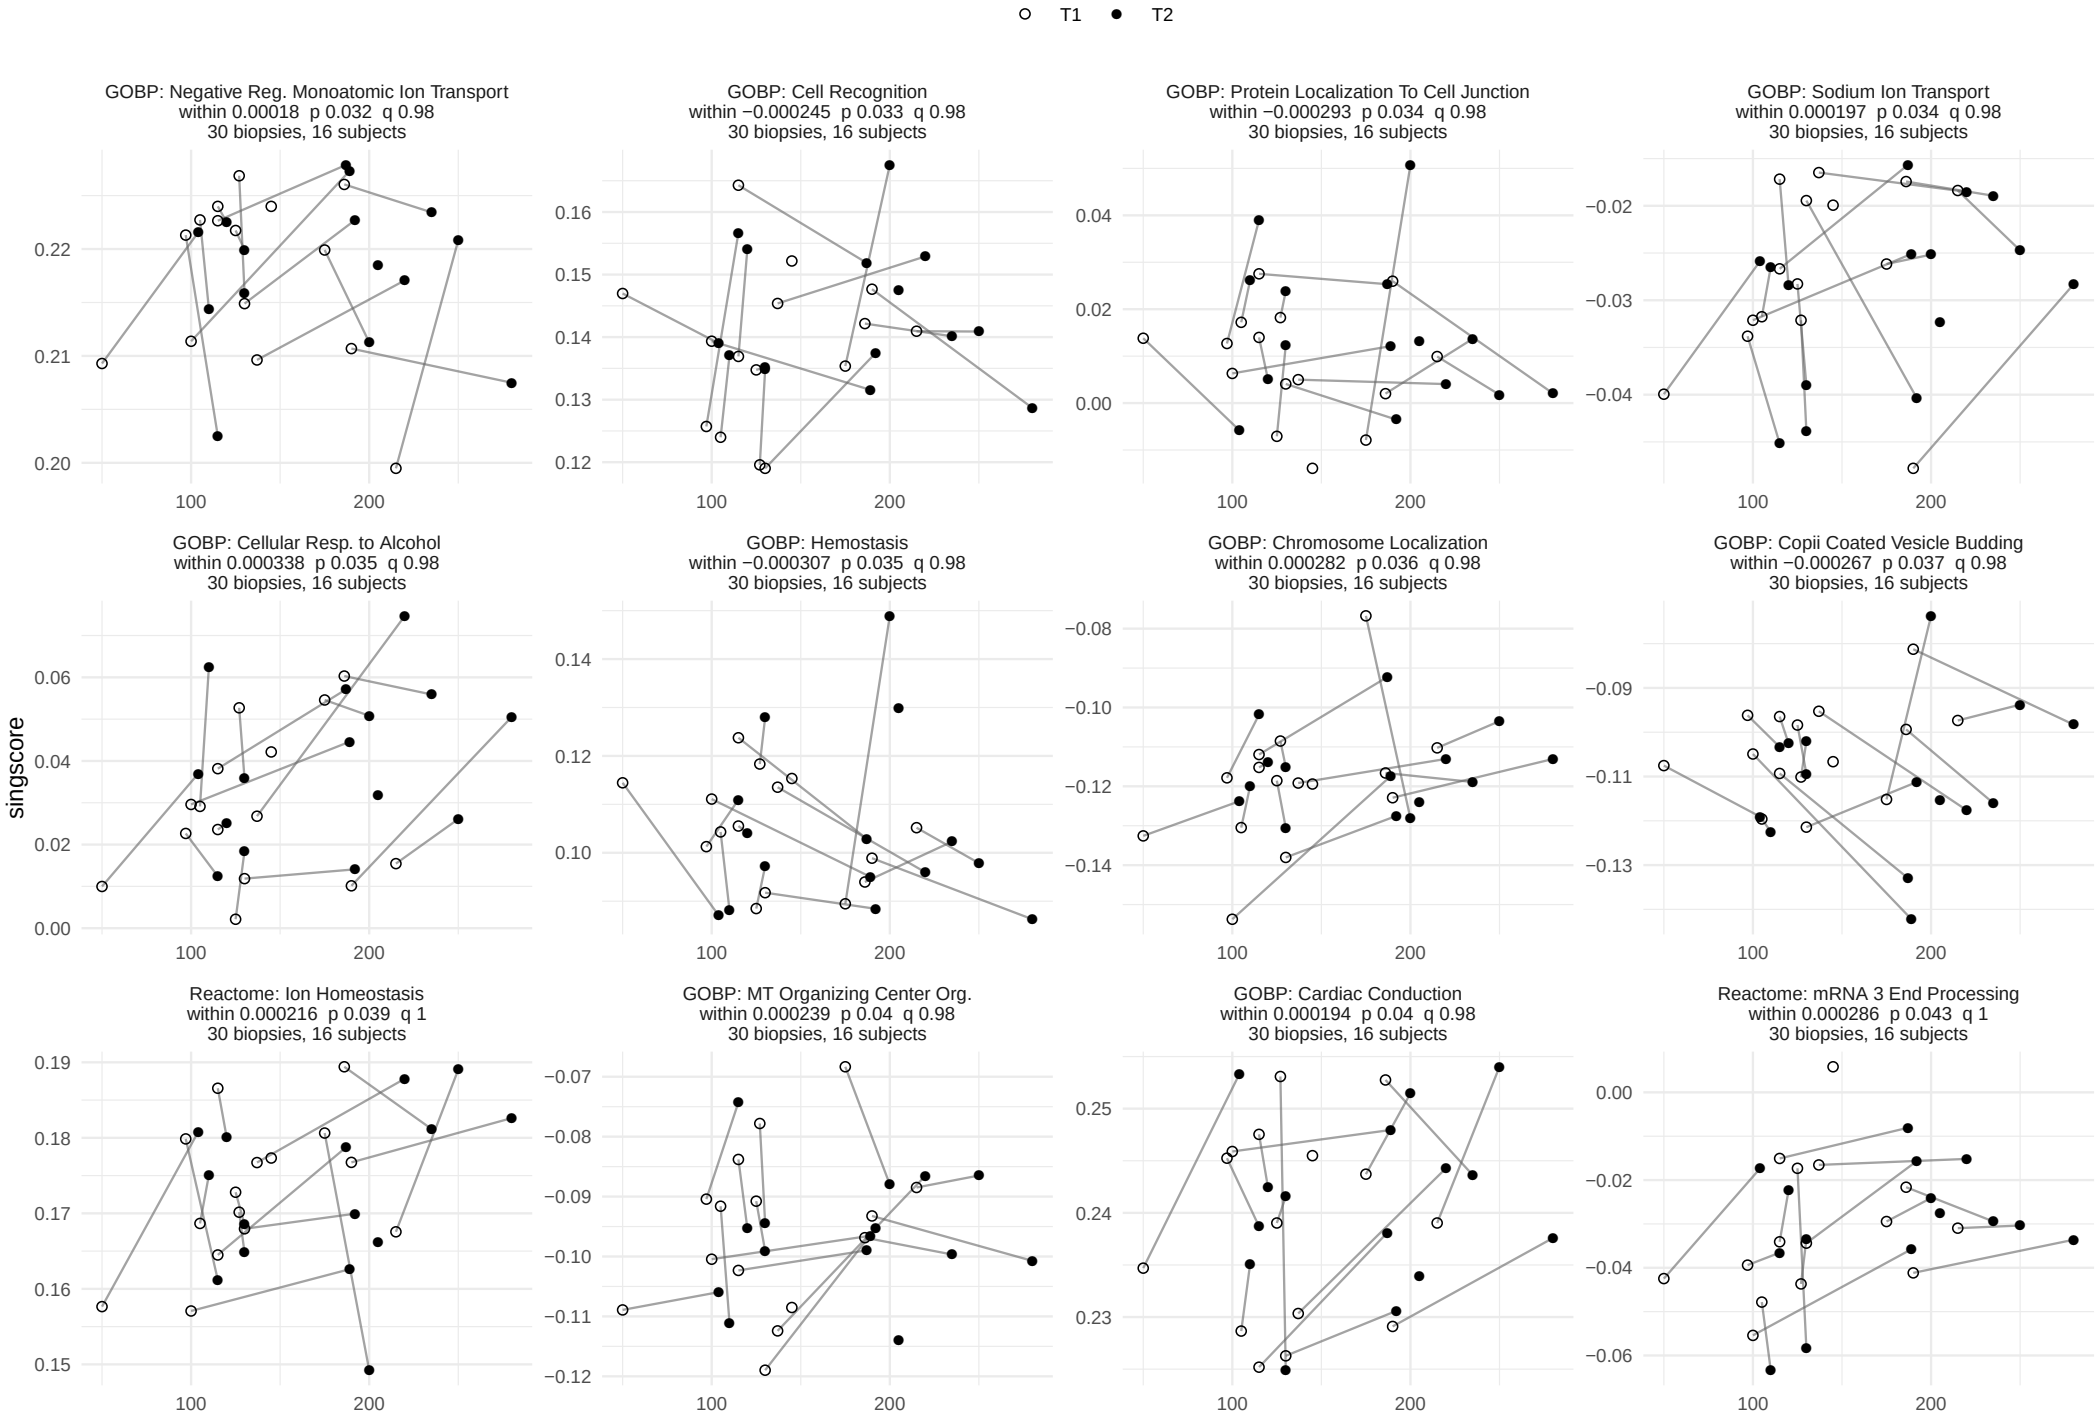

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/02_sets.xlsx, model.


leg_press_1rm, within−person term

49 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 4 of 5.

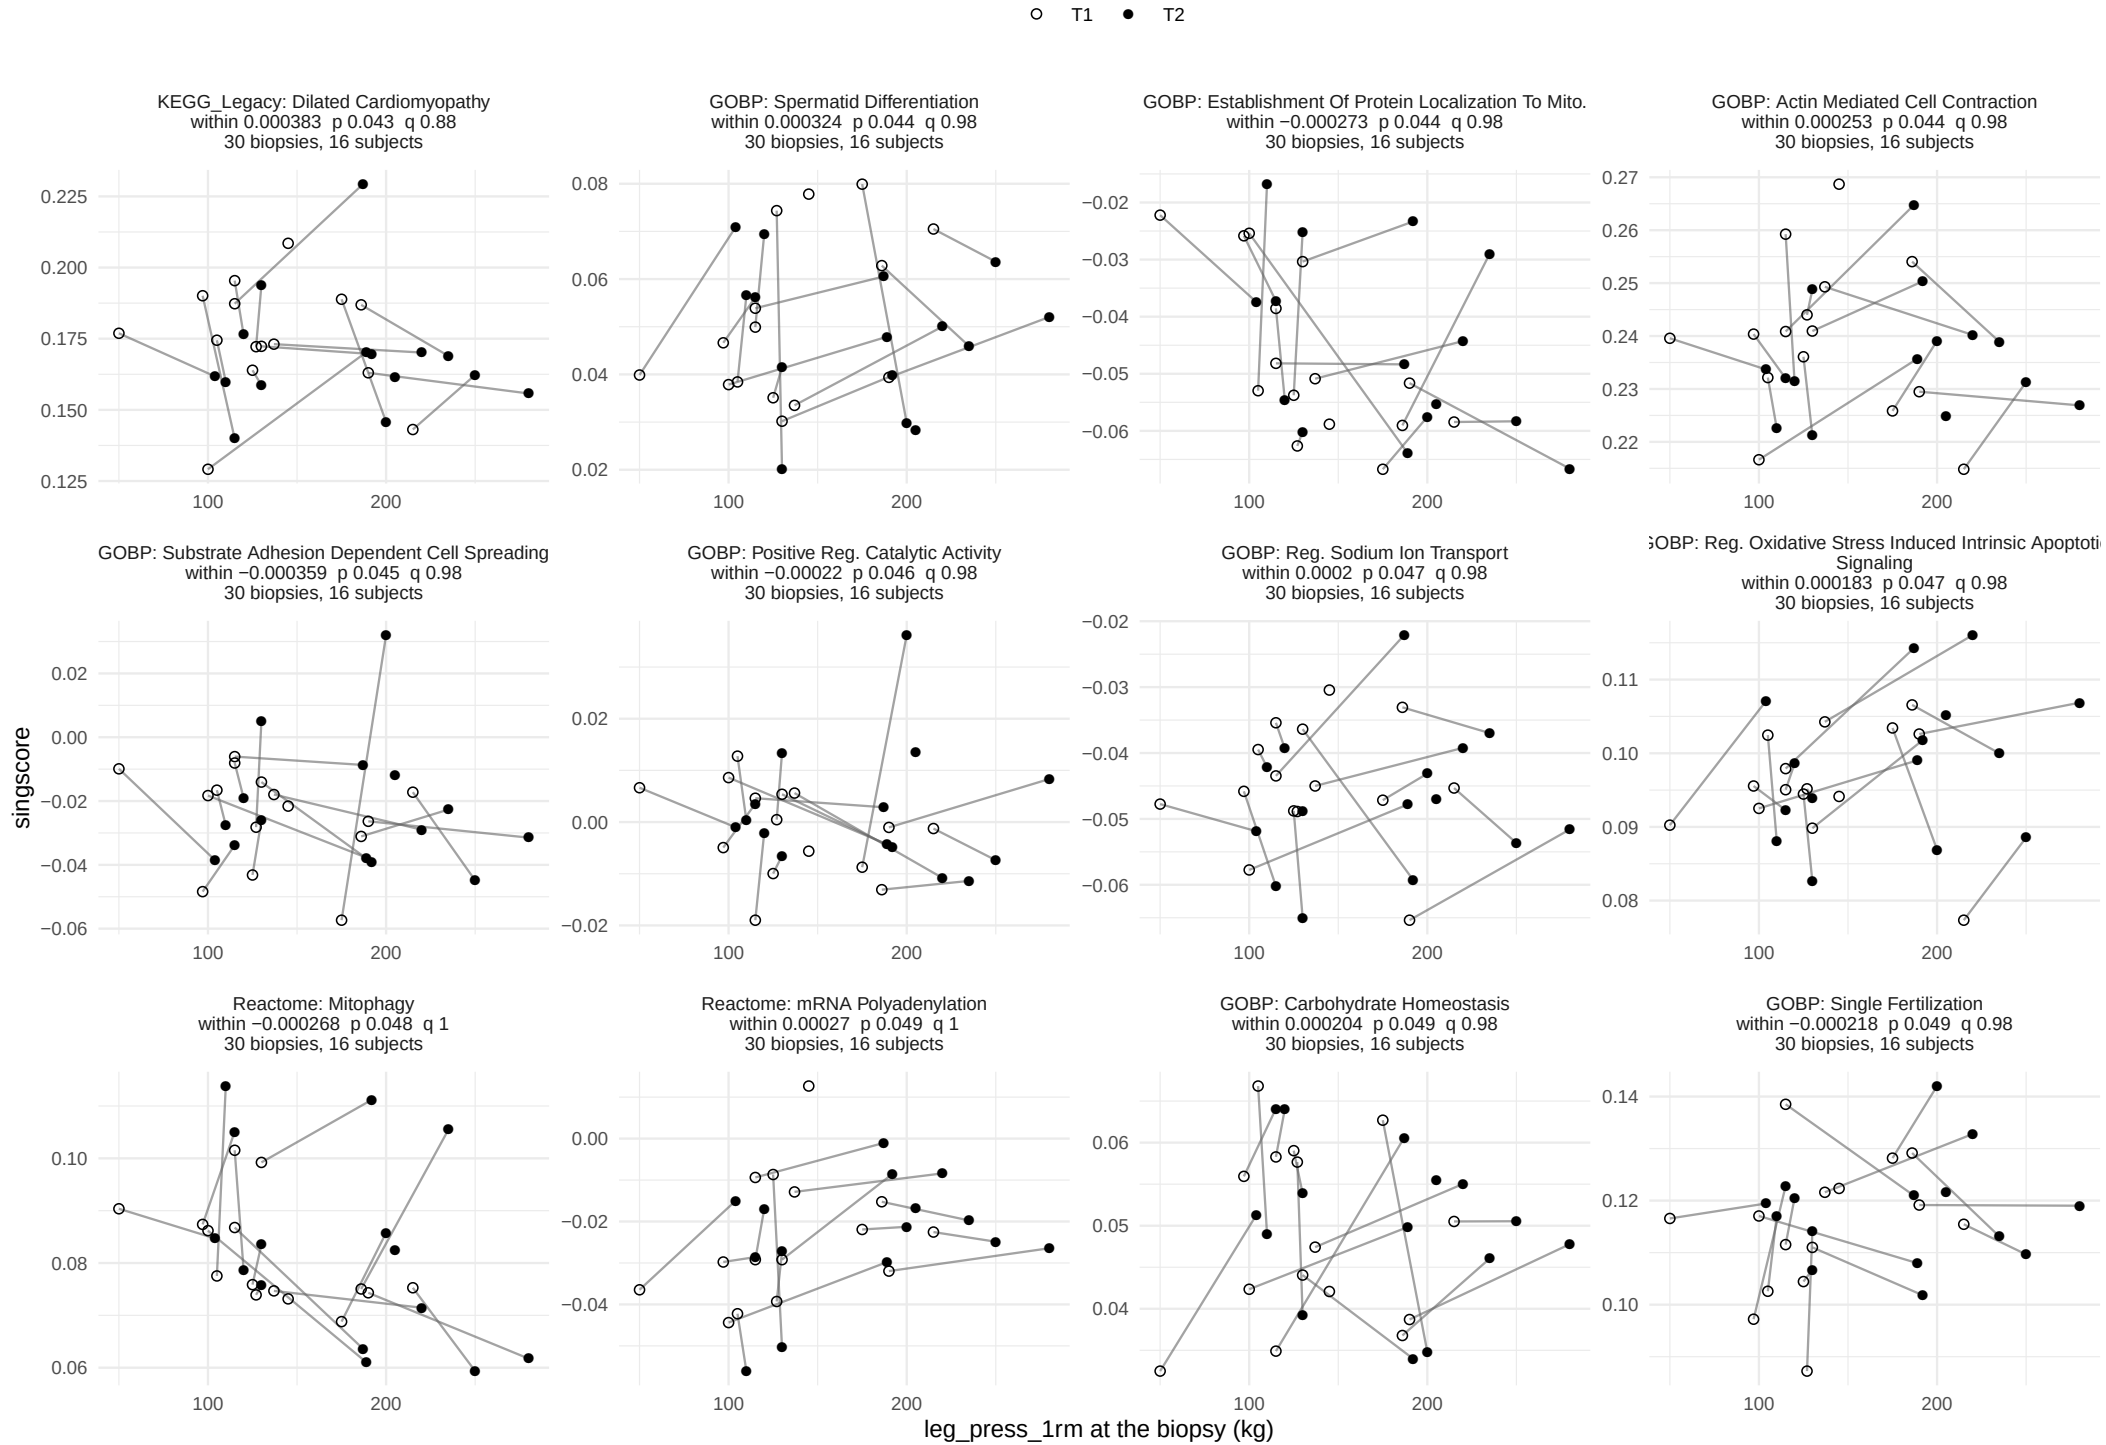

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/02_sets.xlsx, model.


leg_press_1rm, within−person term

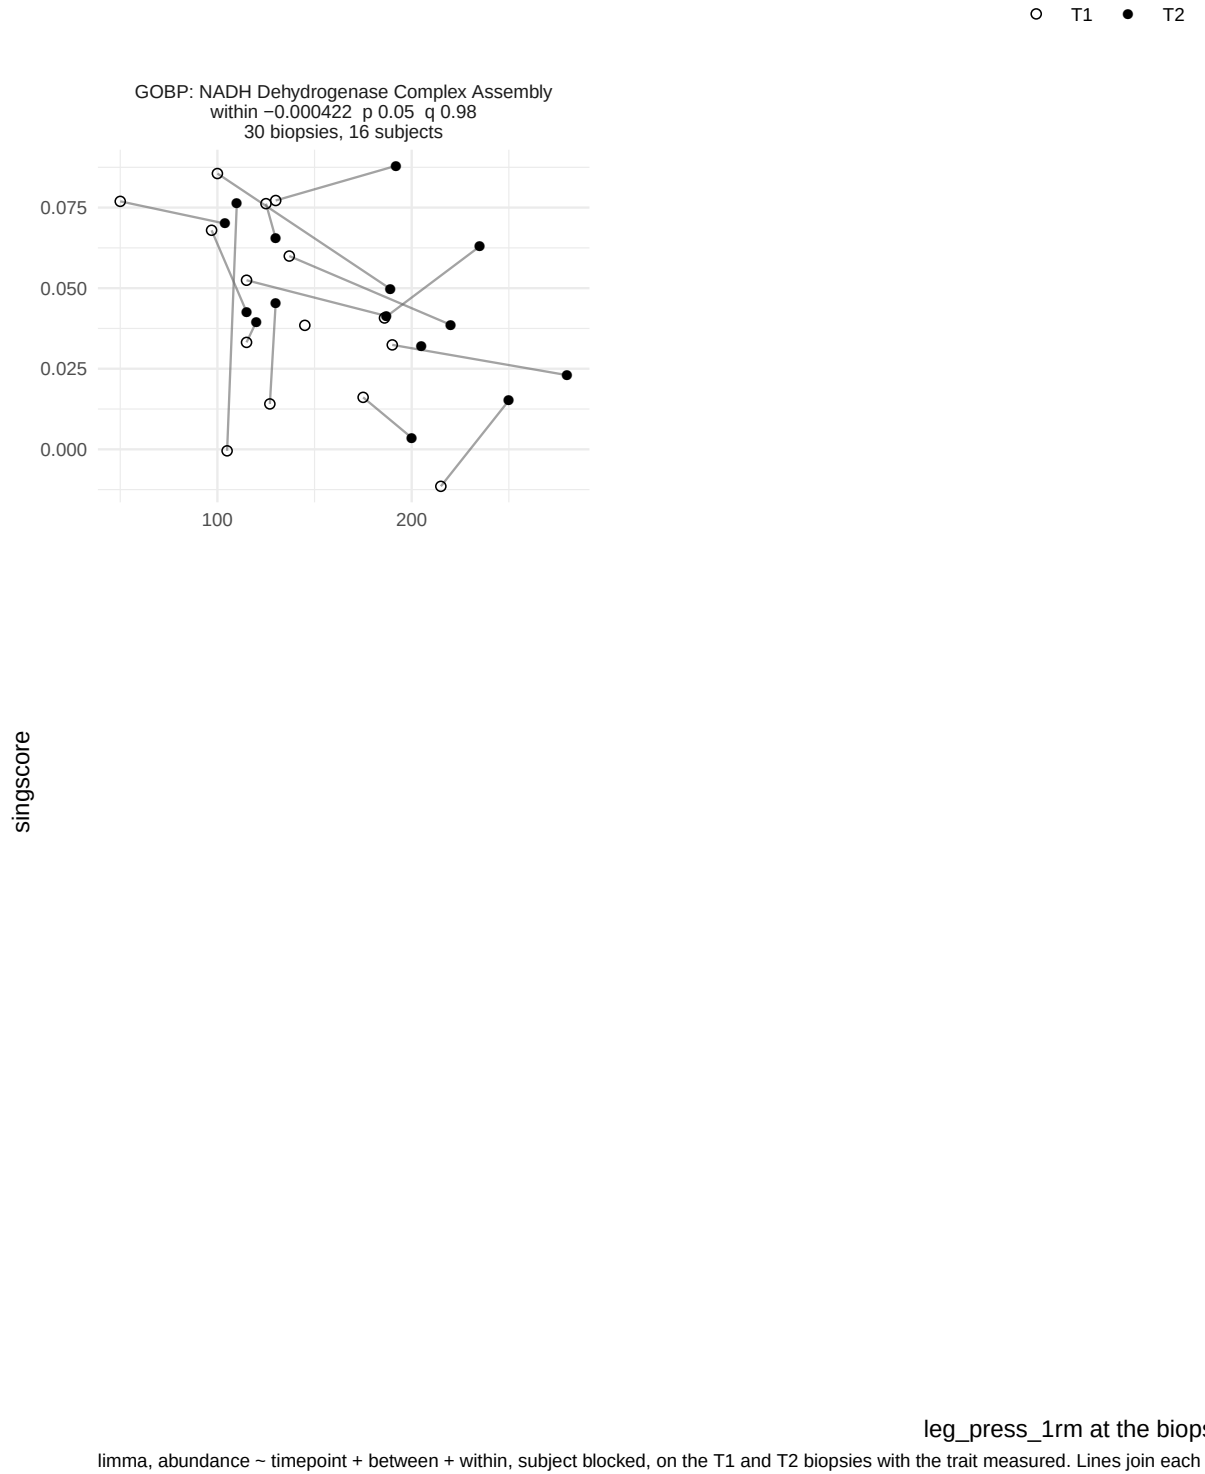

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/02_sets.xlsx, model.

leg_press_1rm, between−person term


64 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 1 of 6.

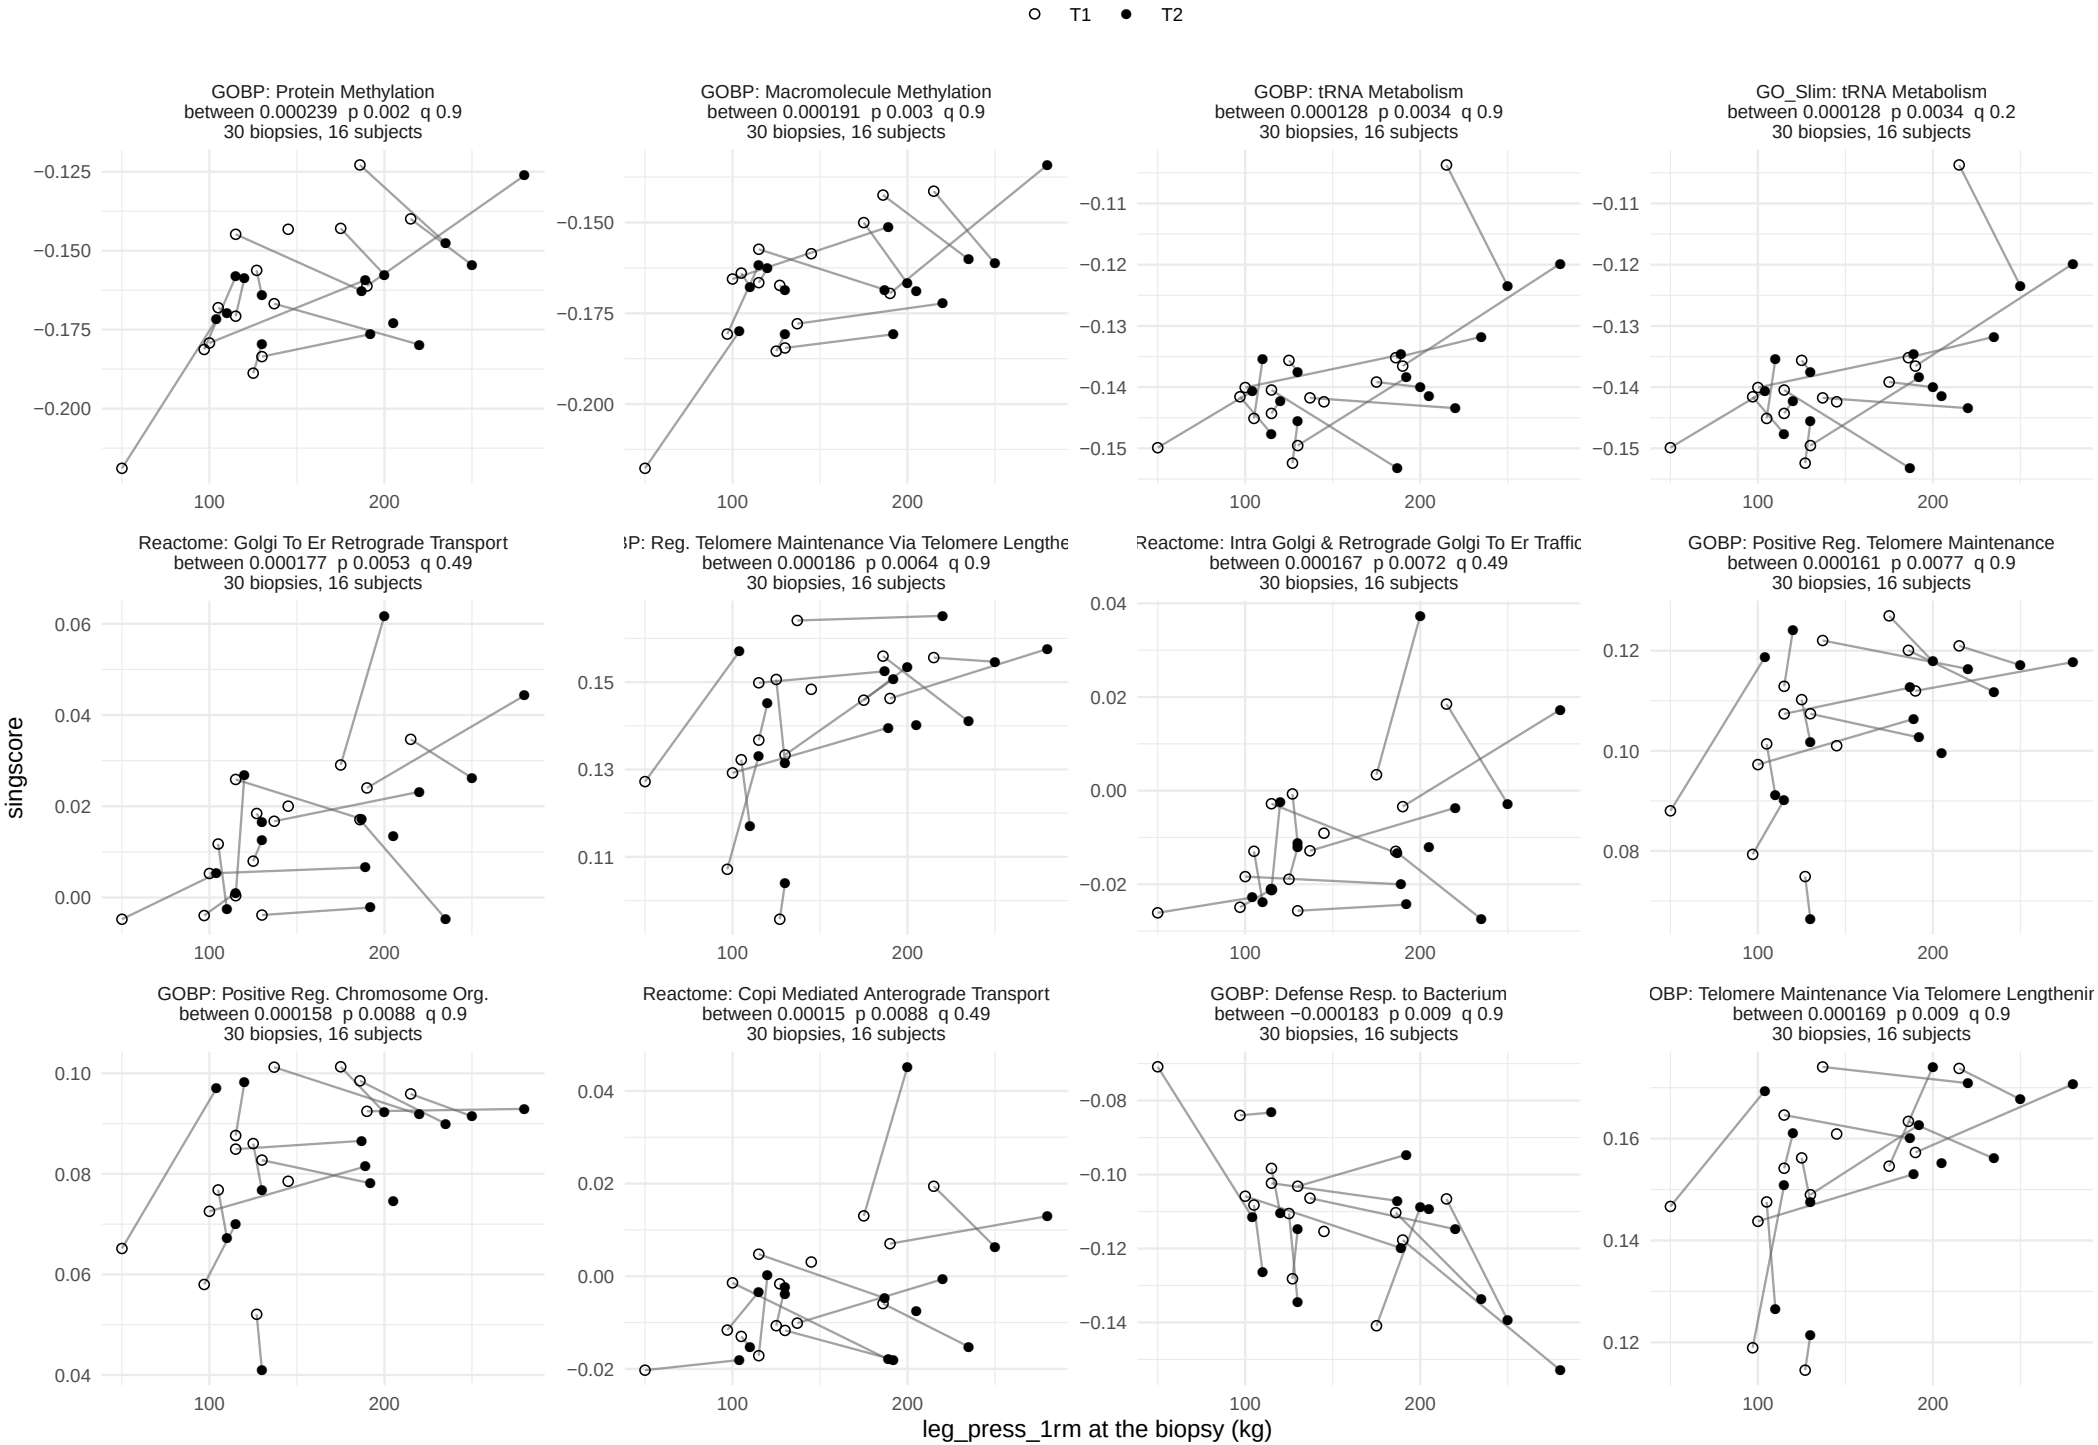

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/02_sets.xlsx, model.

leg_press_1rm, between−person term


64 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 2 of 6.

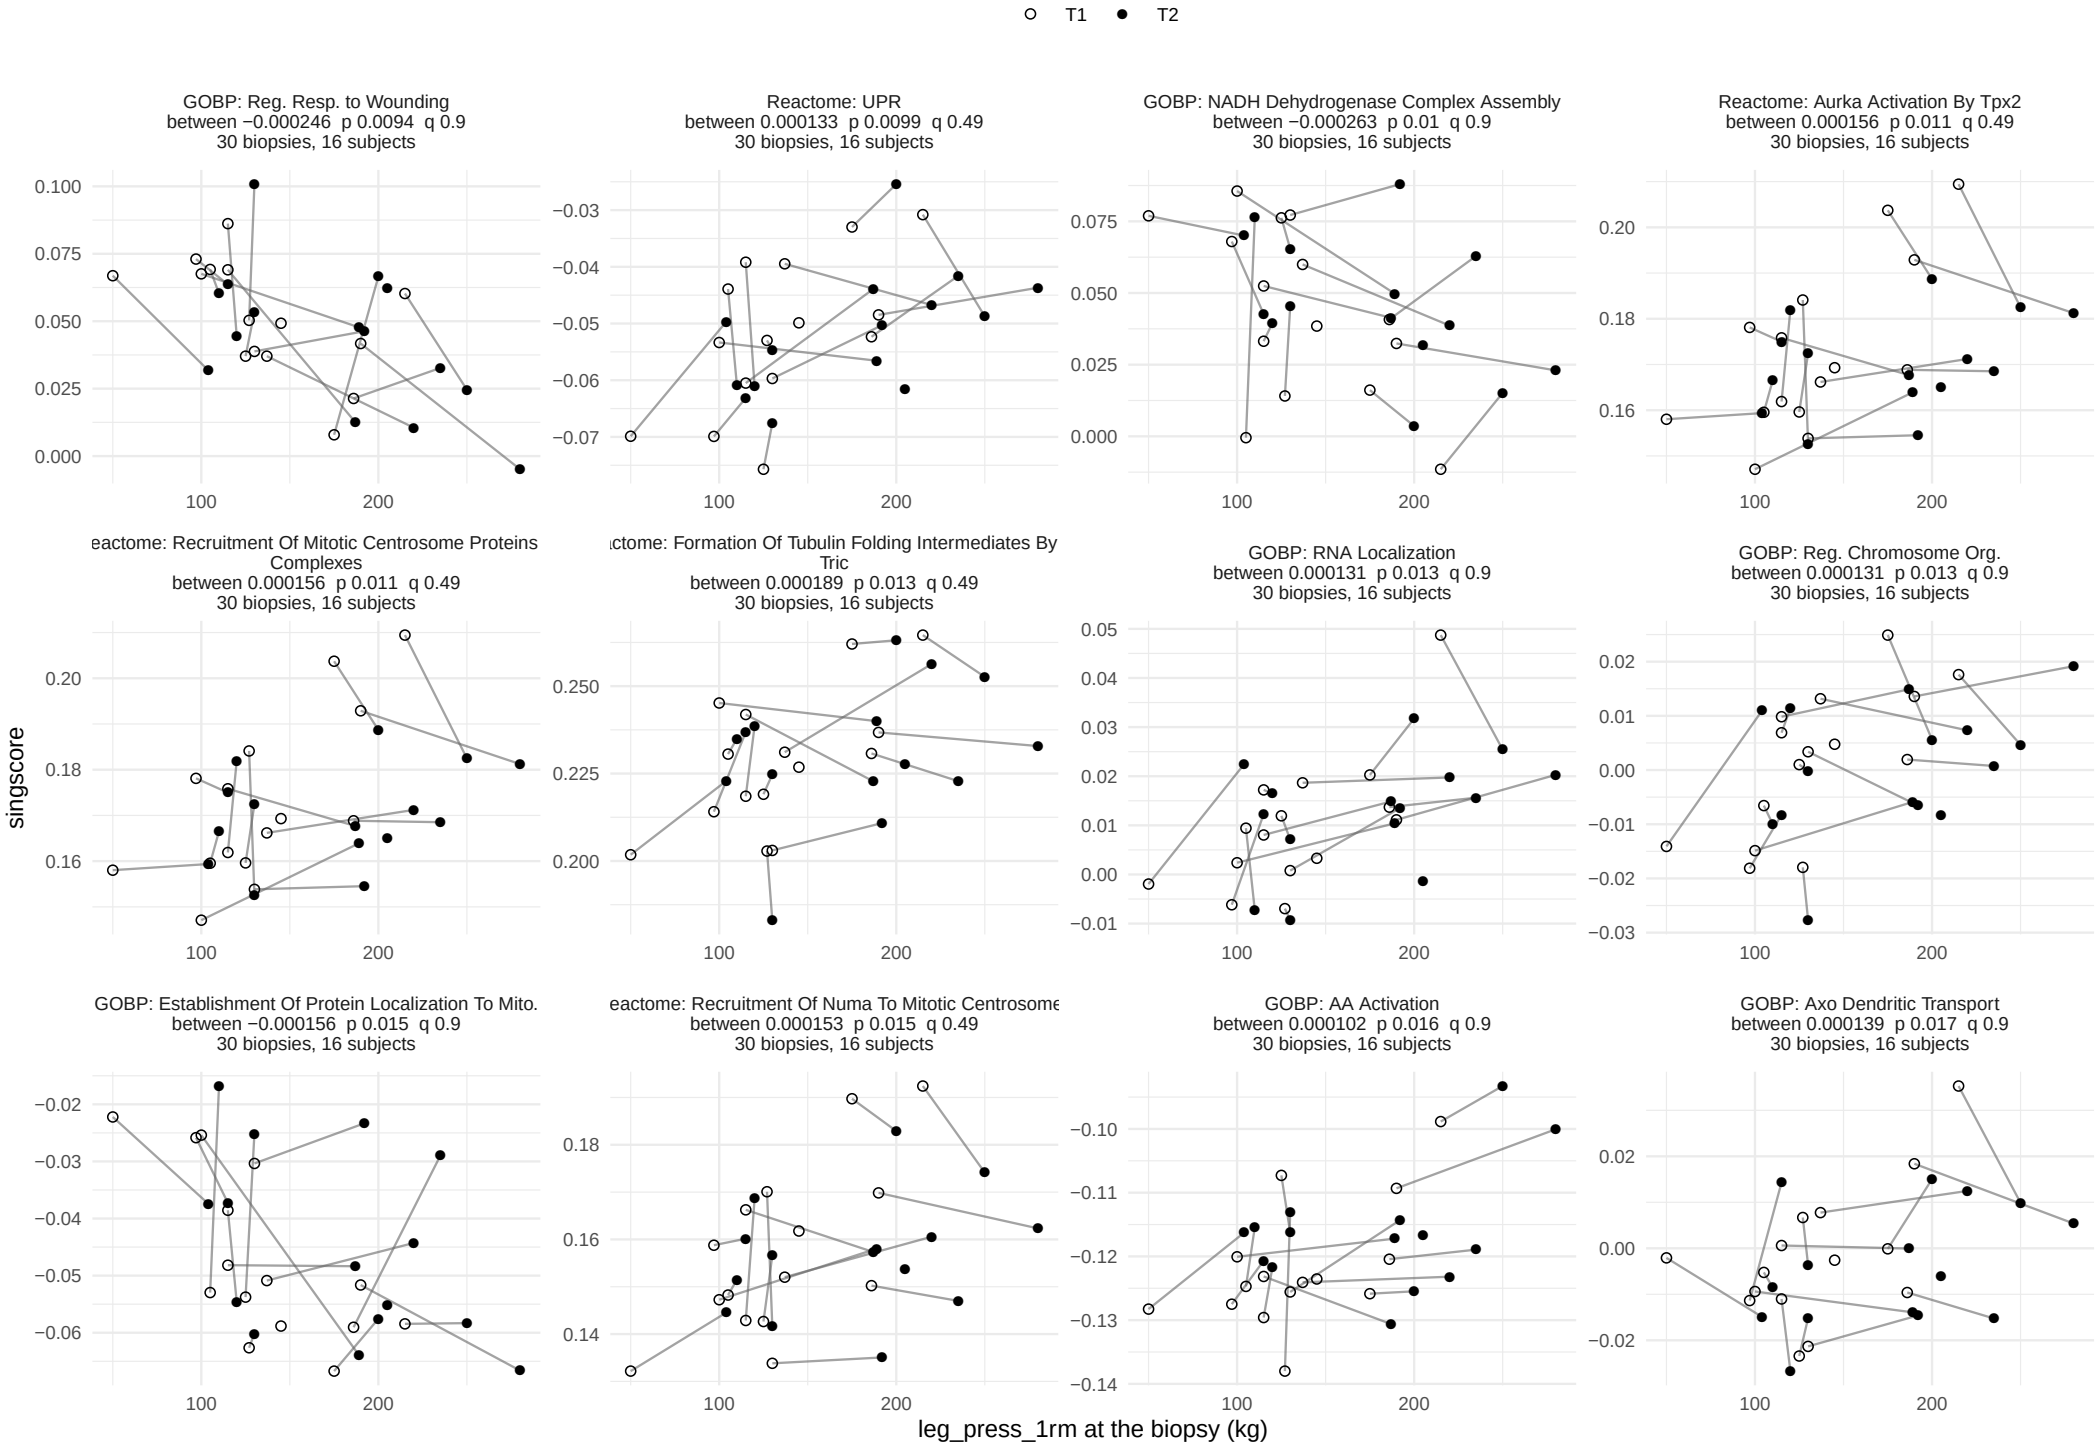

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/02_sets.xlsx, model.

leg_press_1rm, between−person term


64 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 3 of 6.

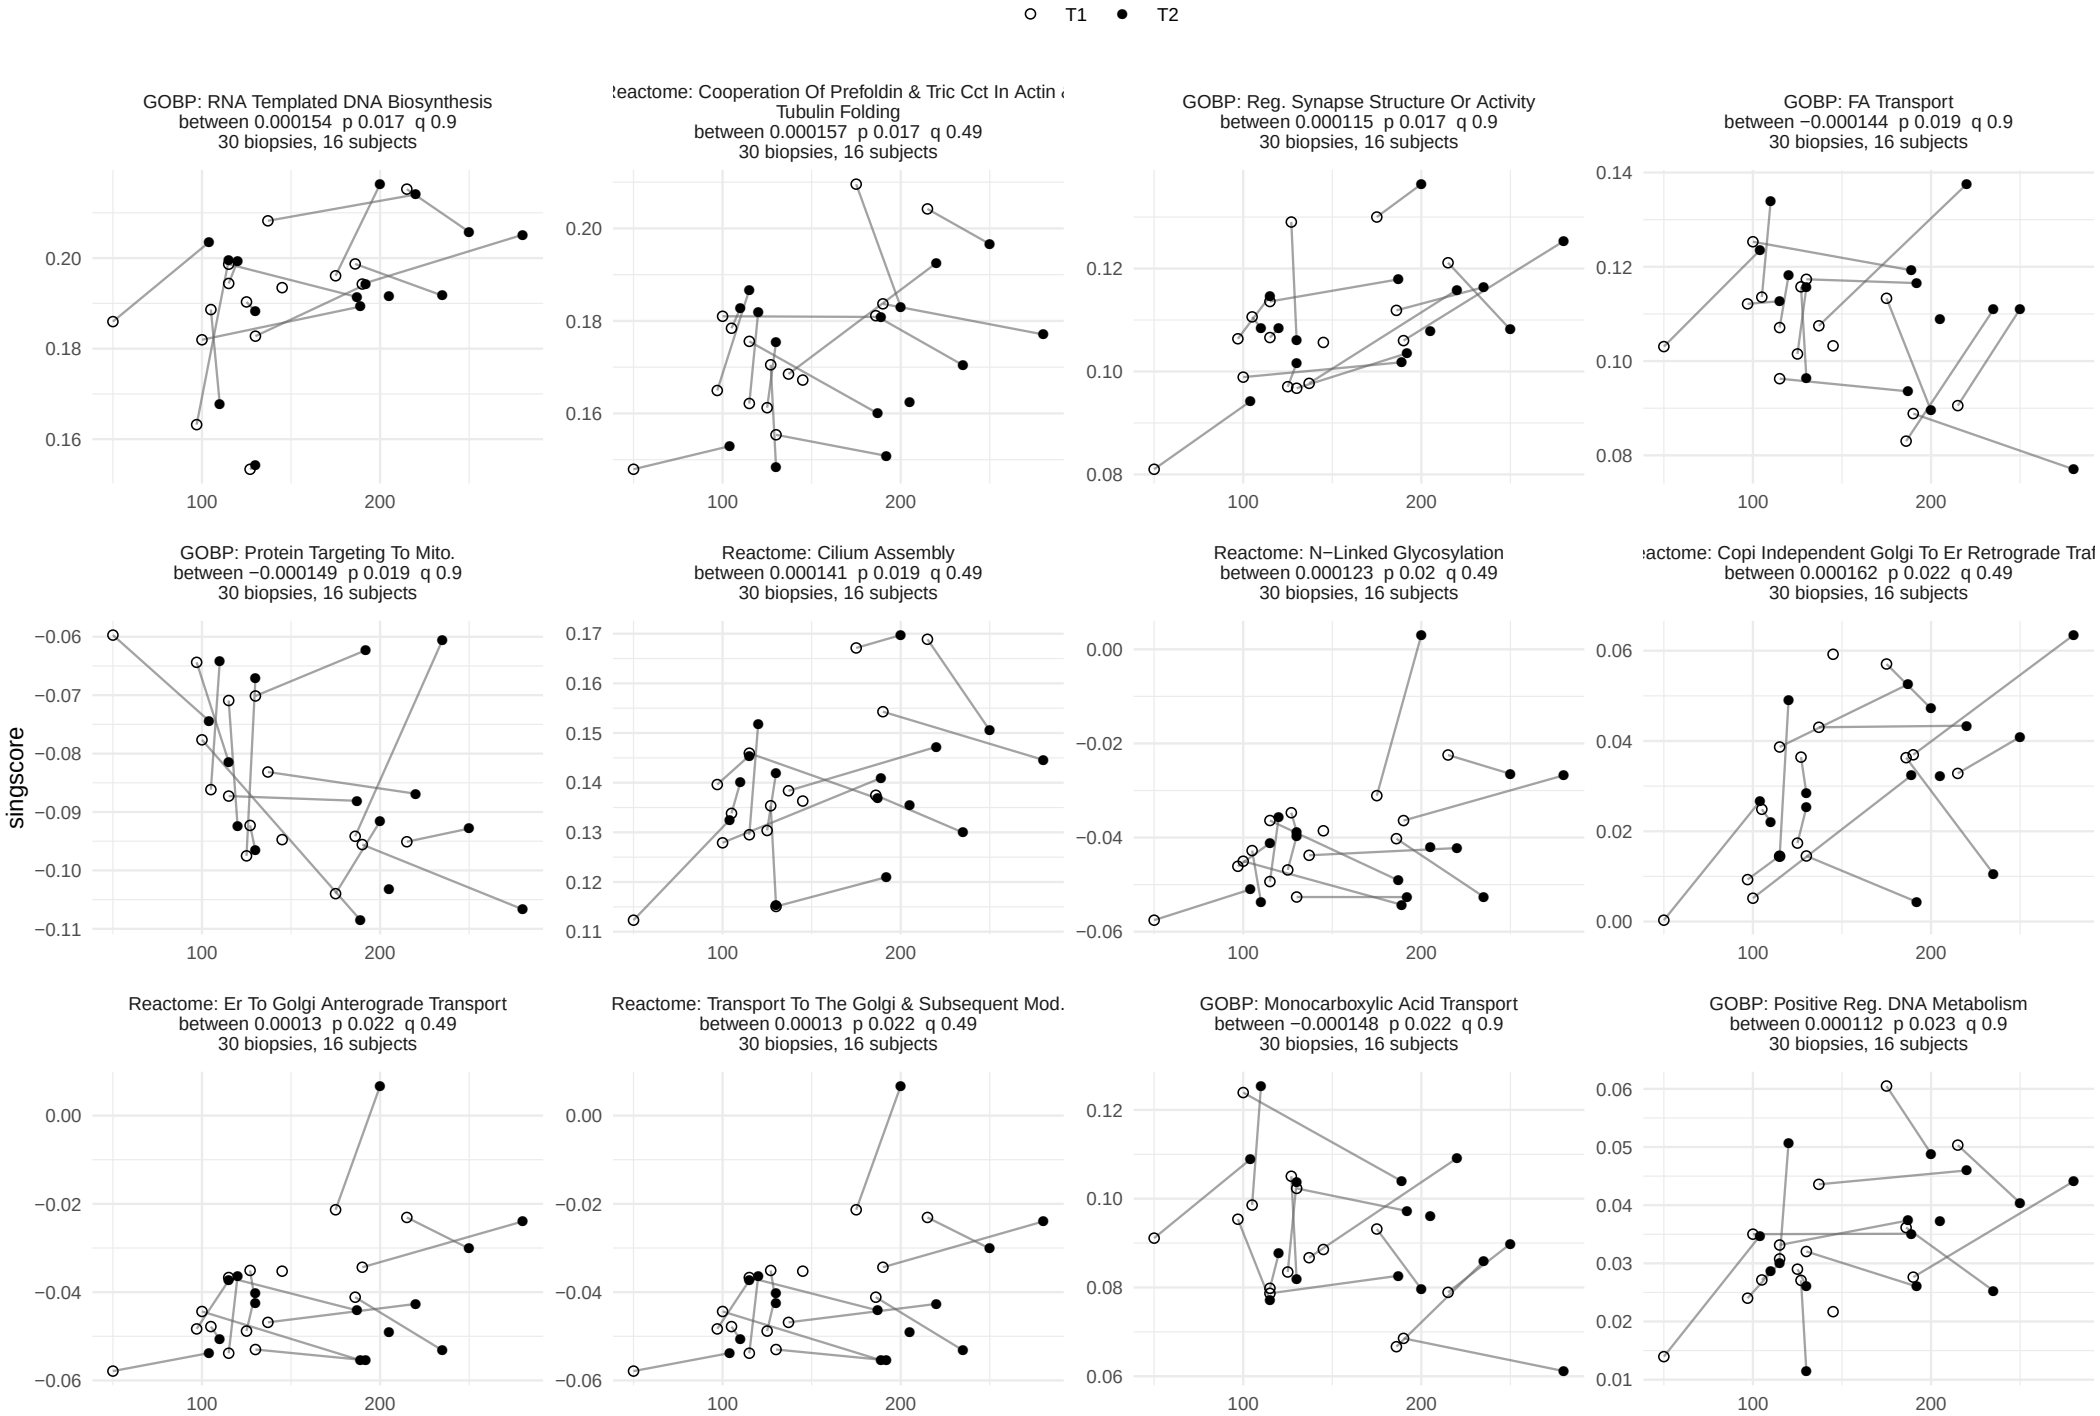

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/02_sets.xlsx, model.

leg_press_1rm, between−person term


64 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 4 of 6.

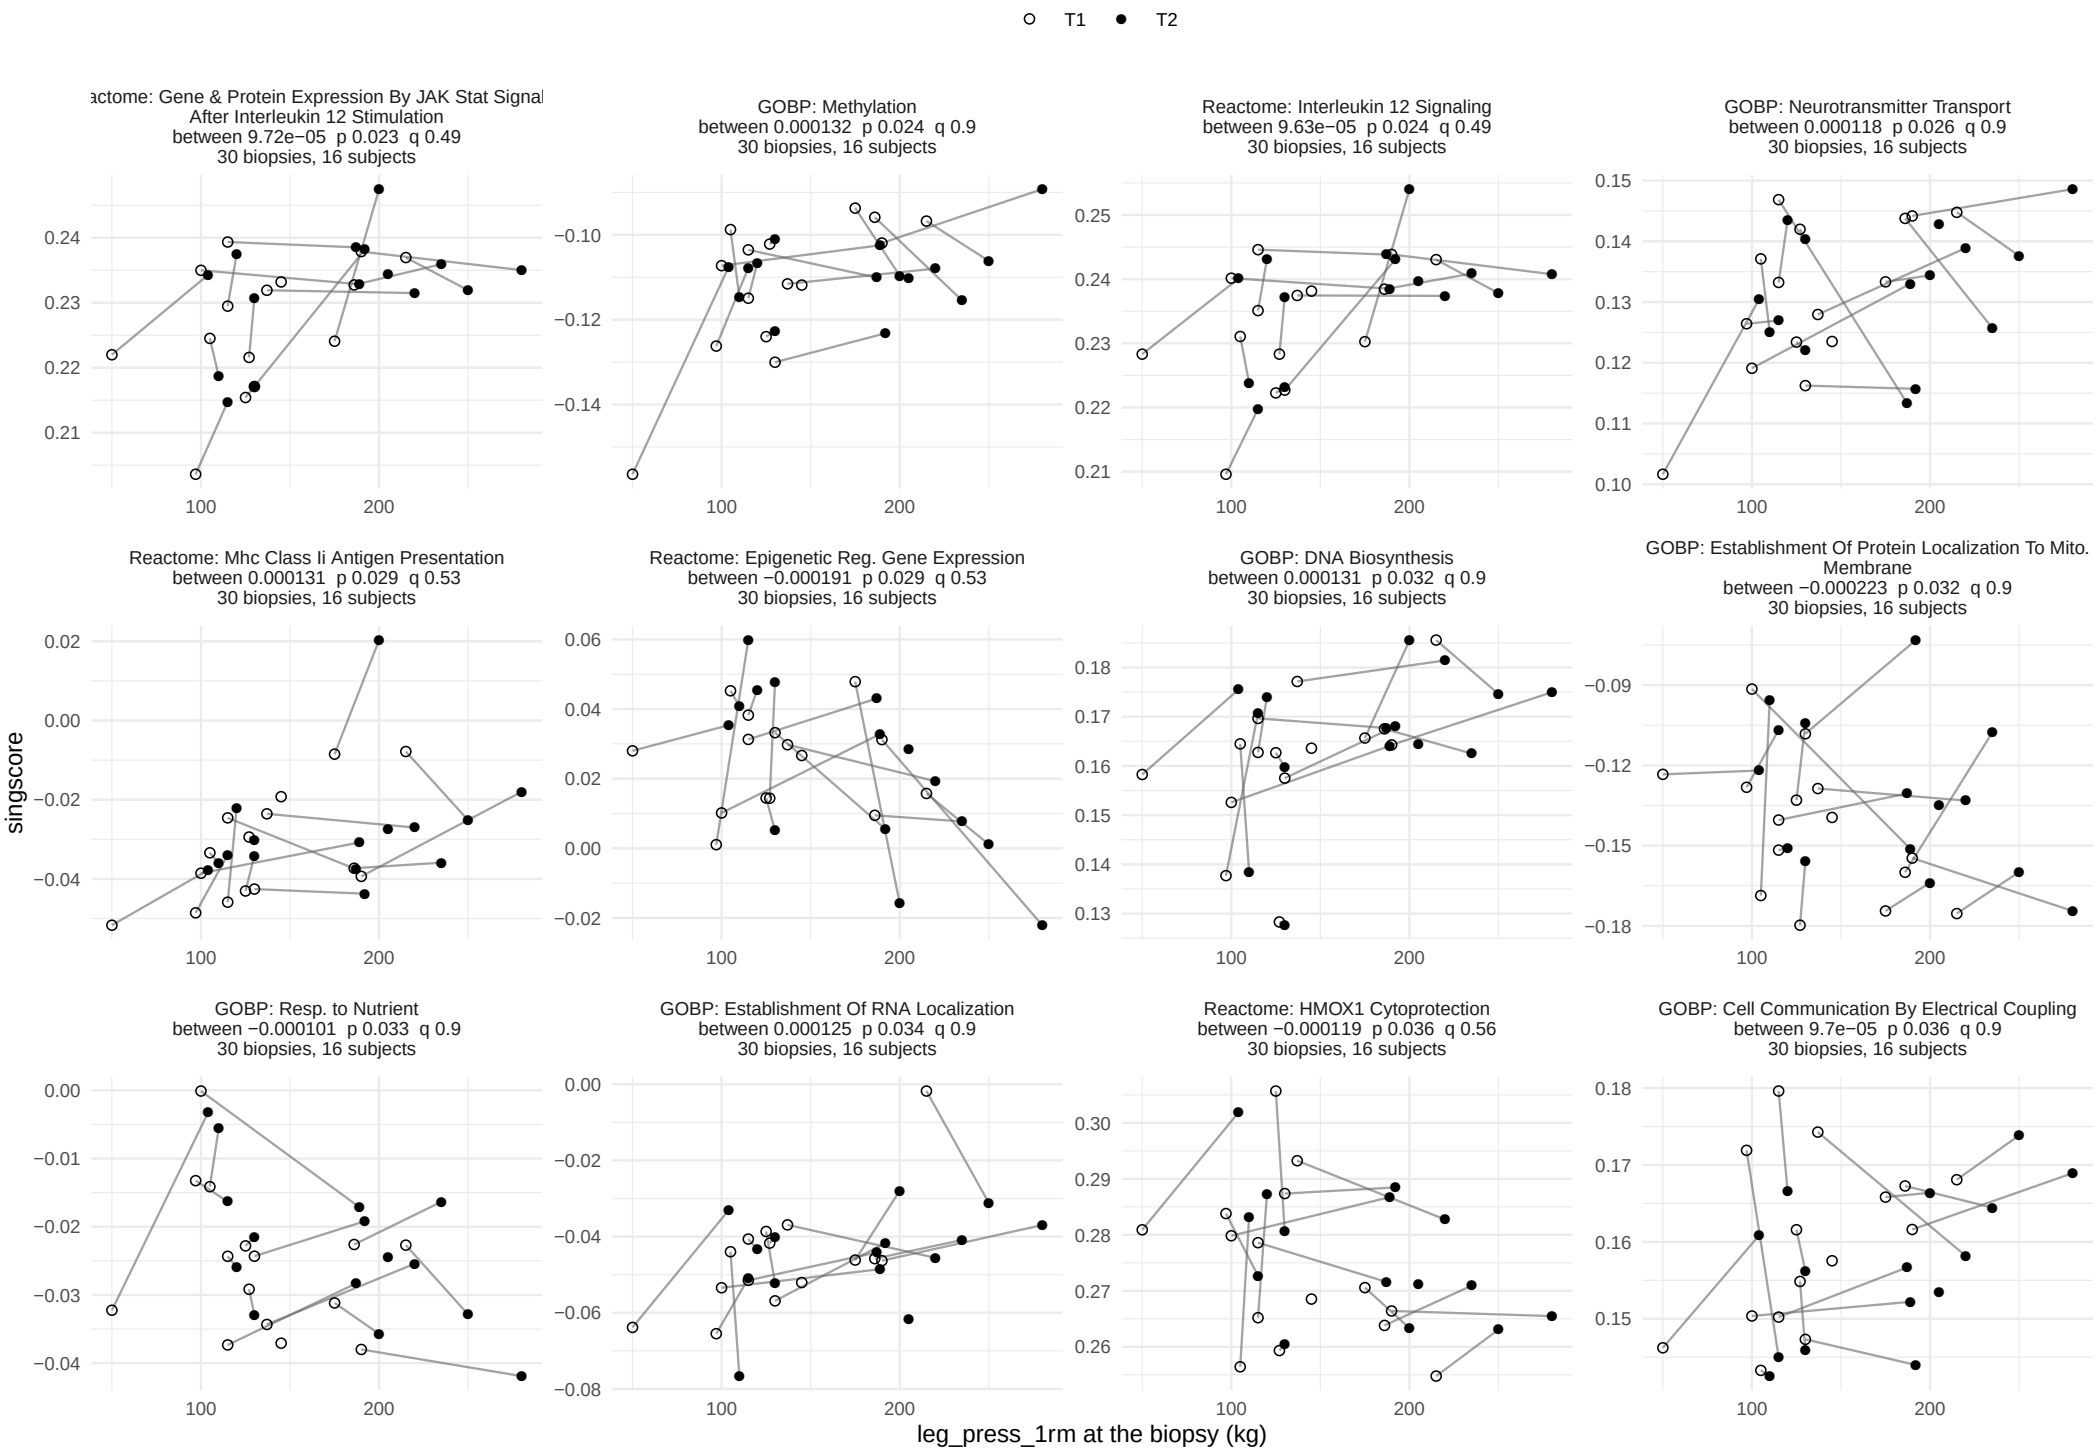

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/02_sets.xlsx, model.

leg_press_1rm, between−person term


64 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 5 of 6.

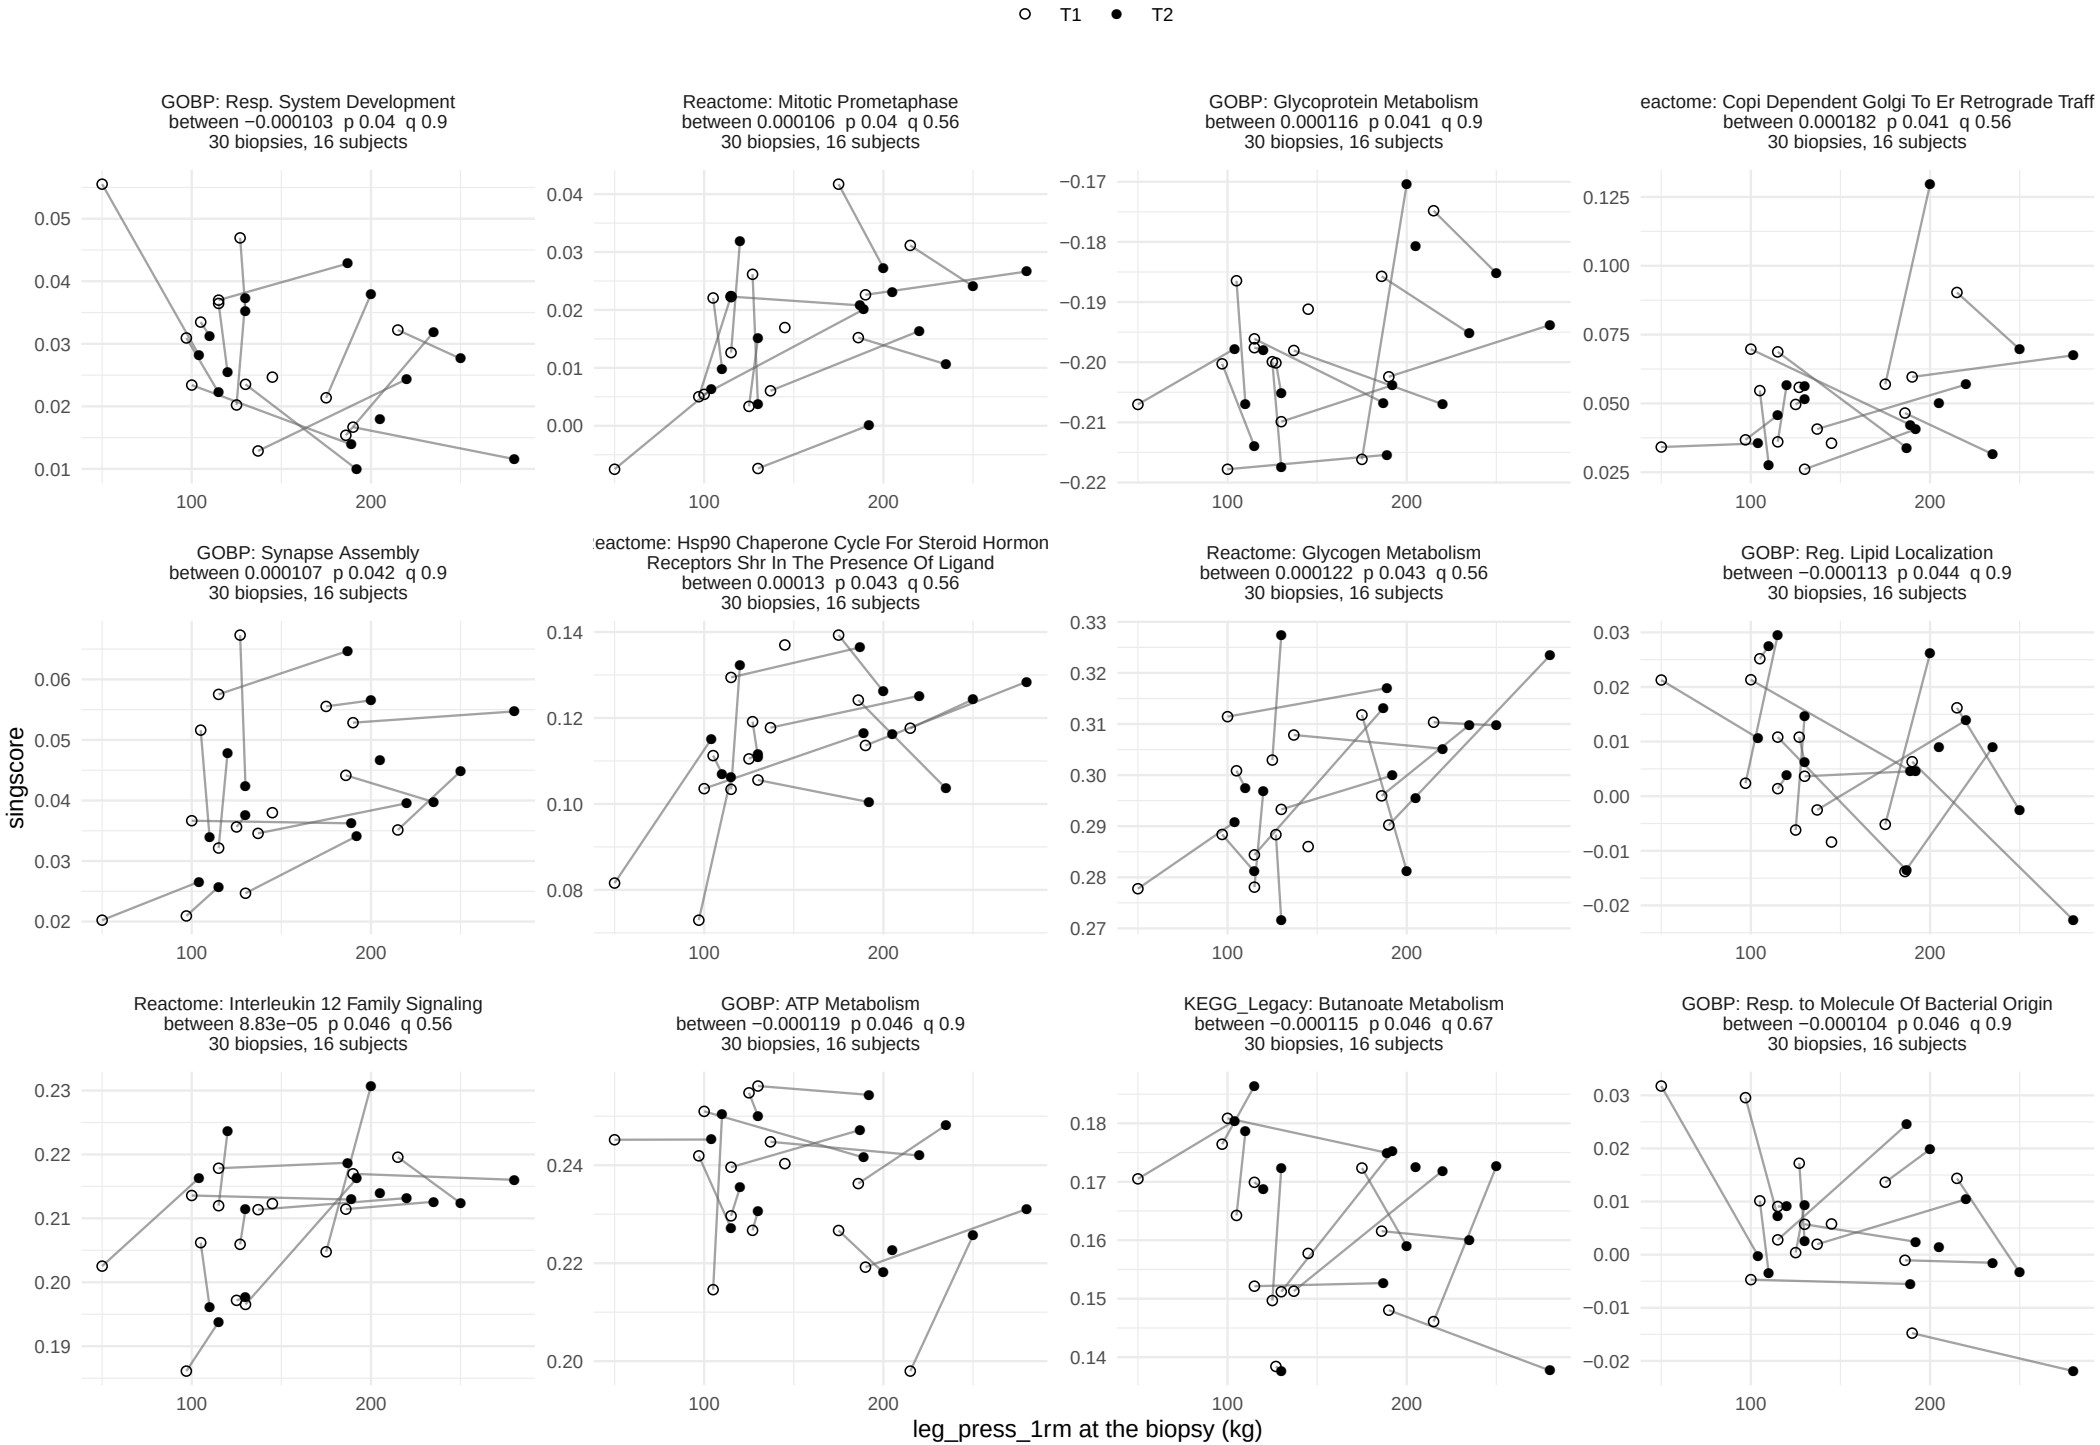

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/02_sets.xlsx, model.

leg_press_1rm, between−person term


64 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 6 of 6.

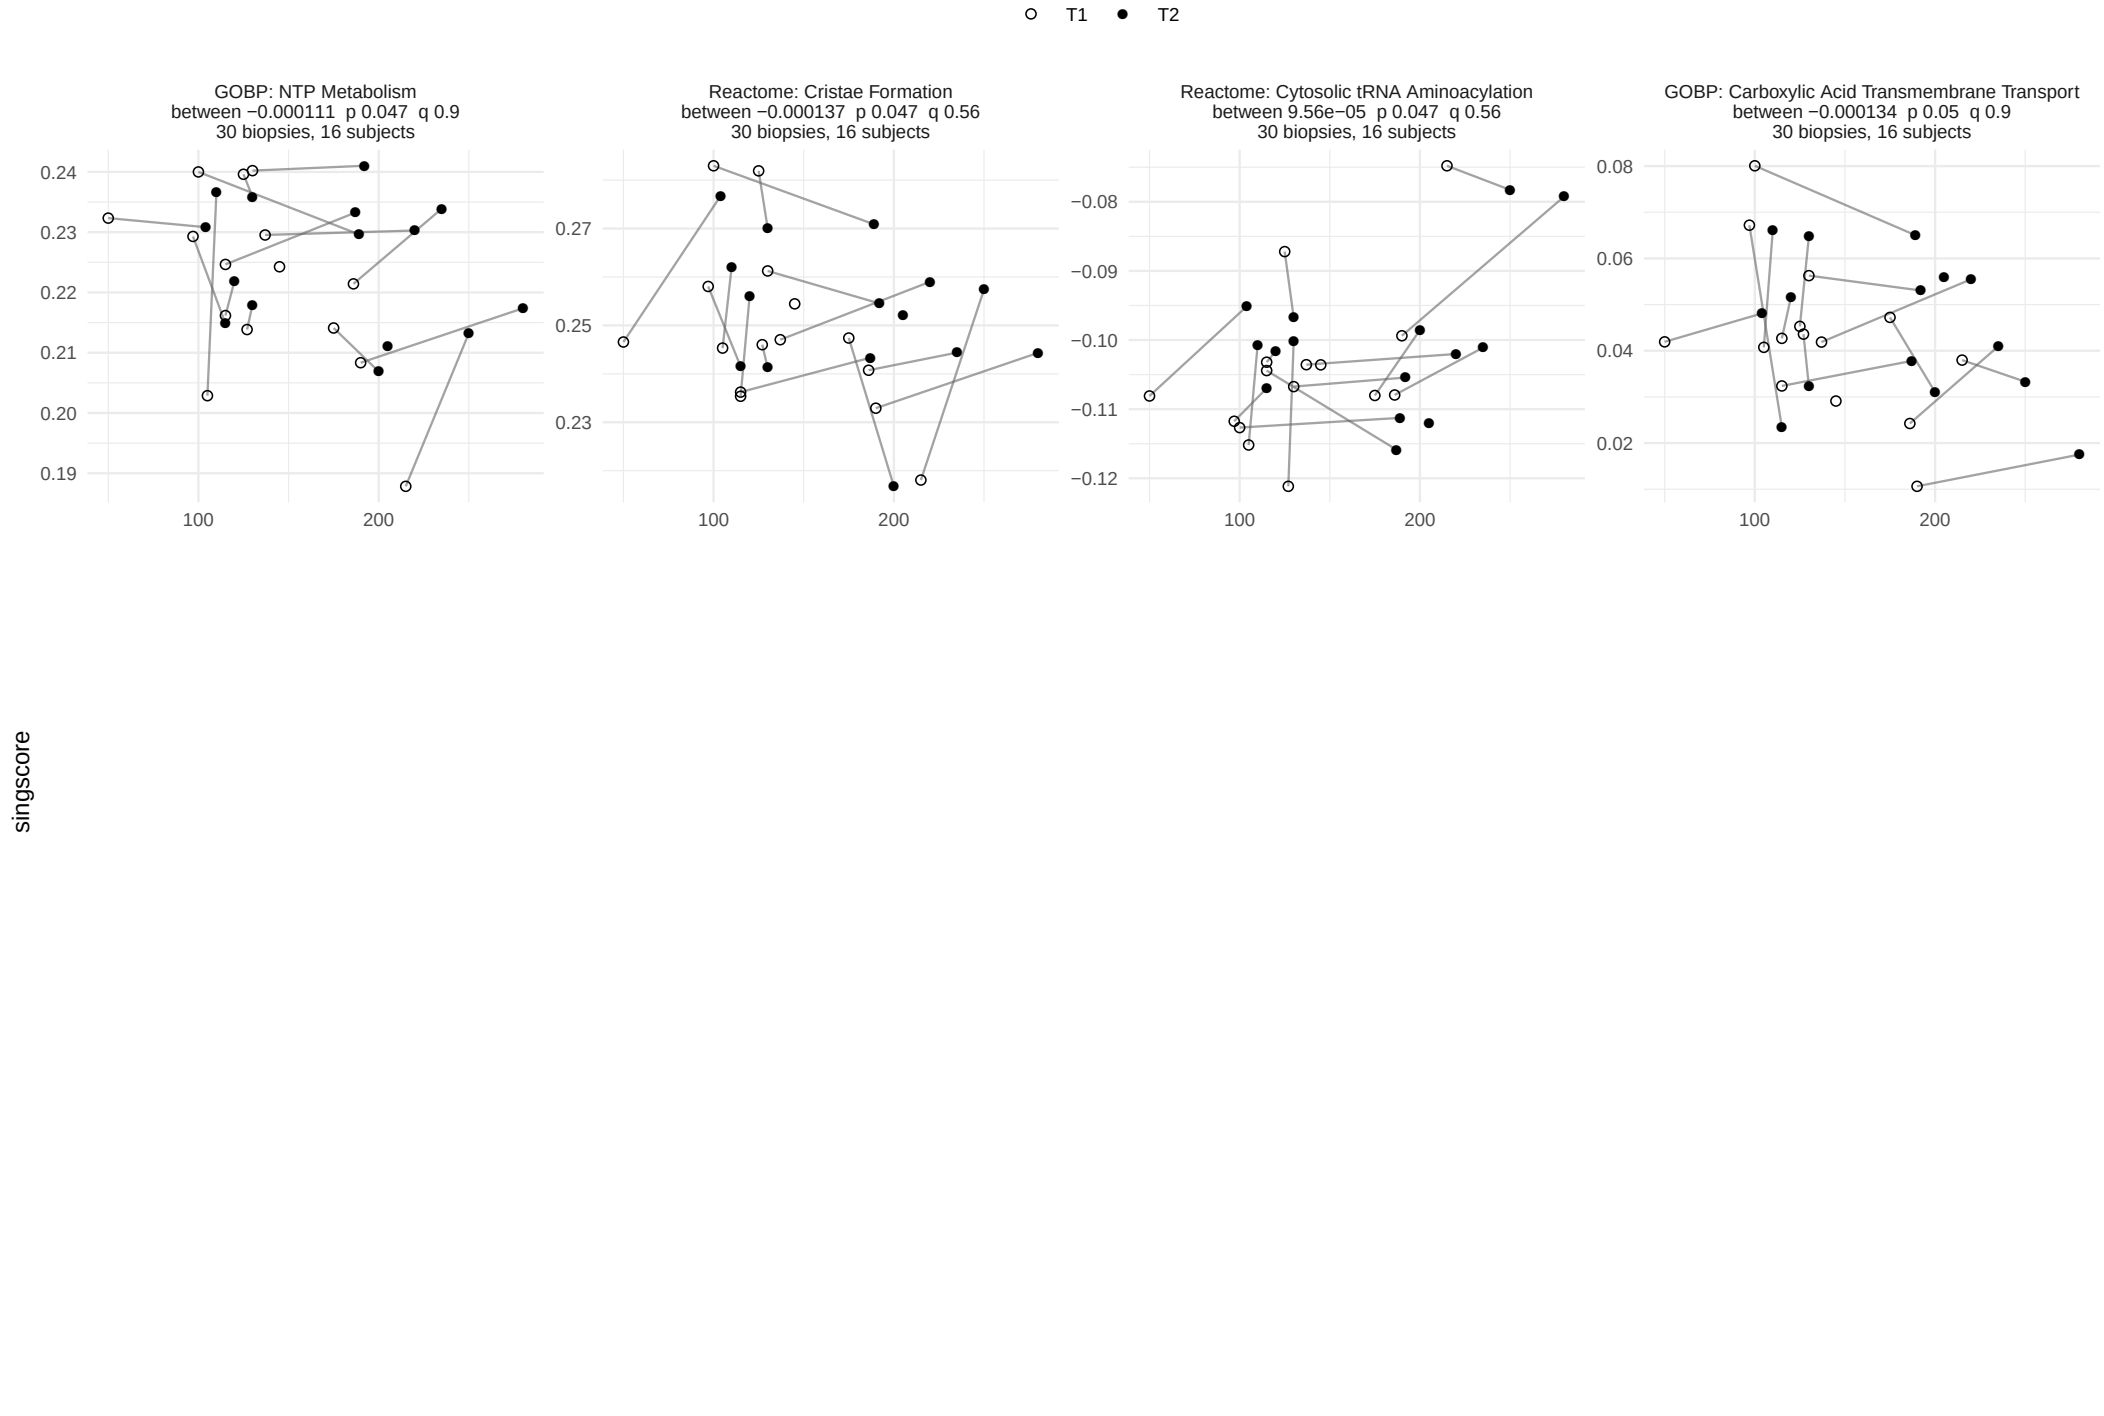

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/02_sets.xlsx, model.

leg_ext_1rm, within−person term


82 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 1 of 7.

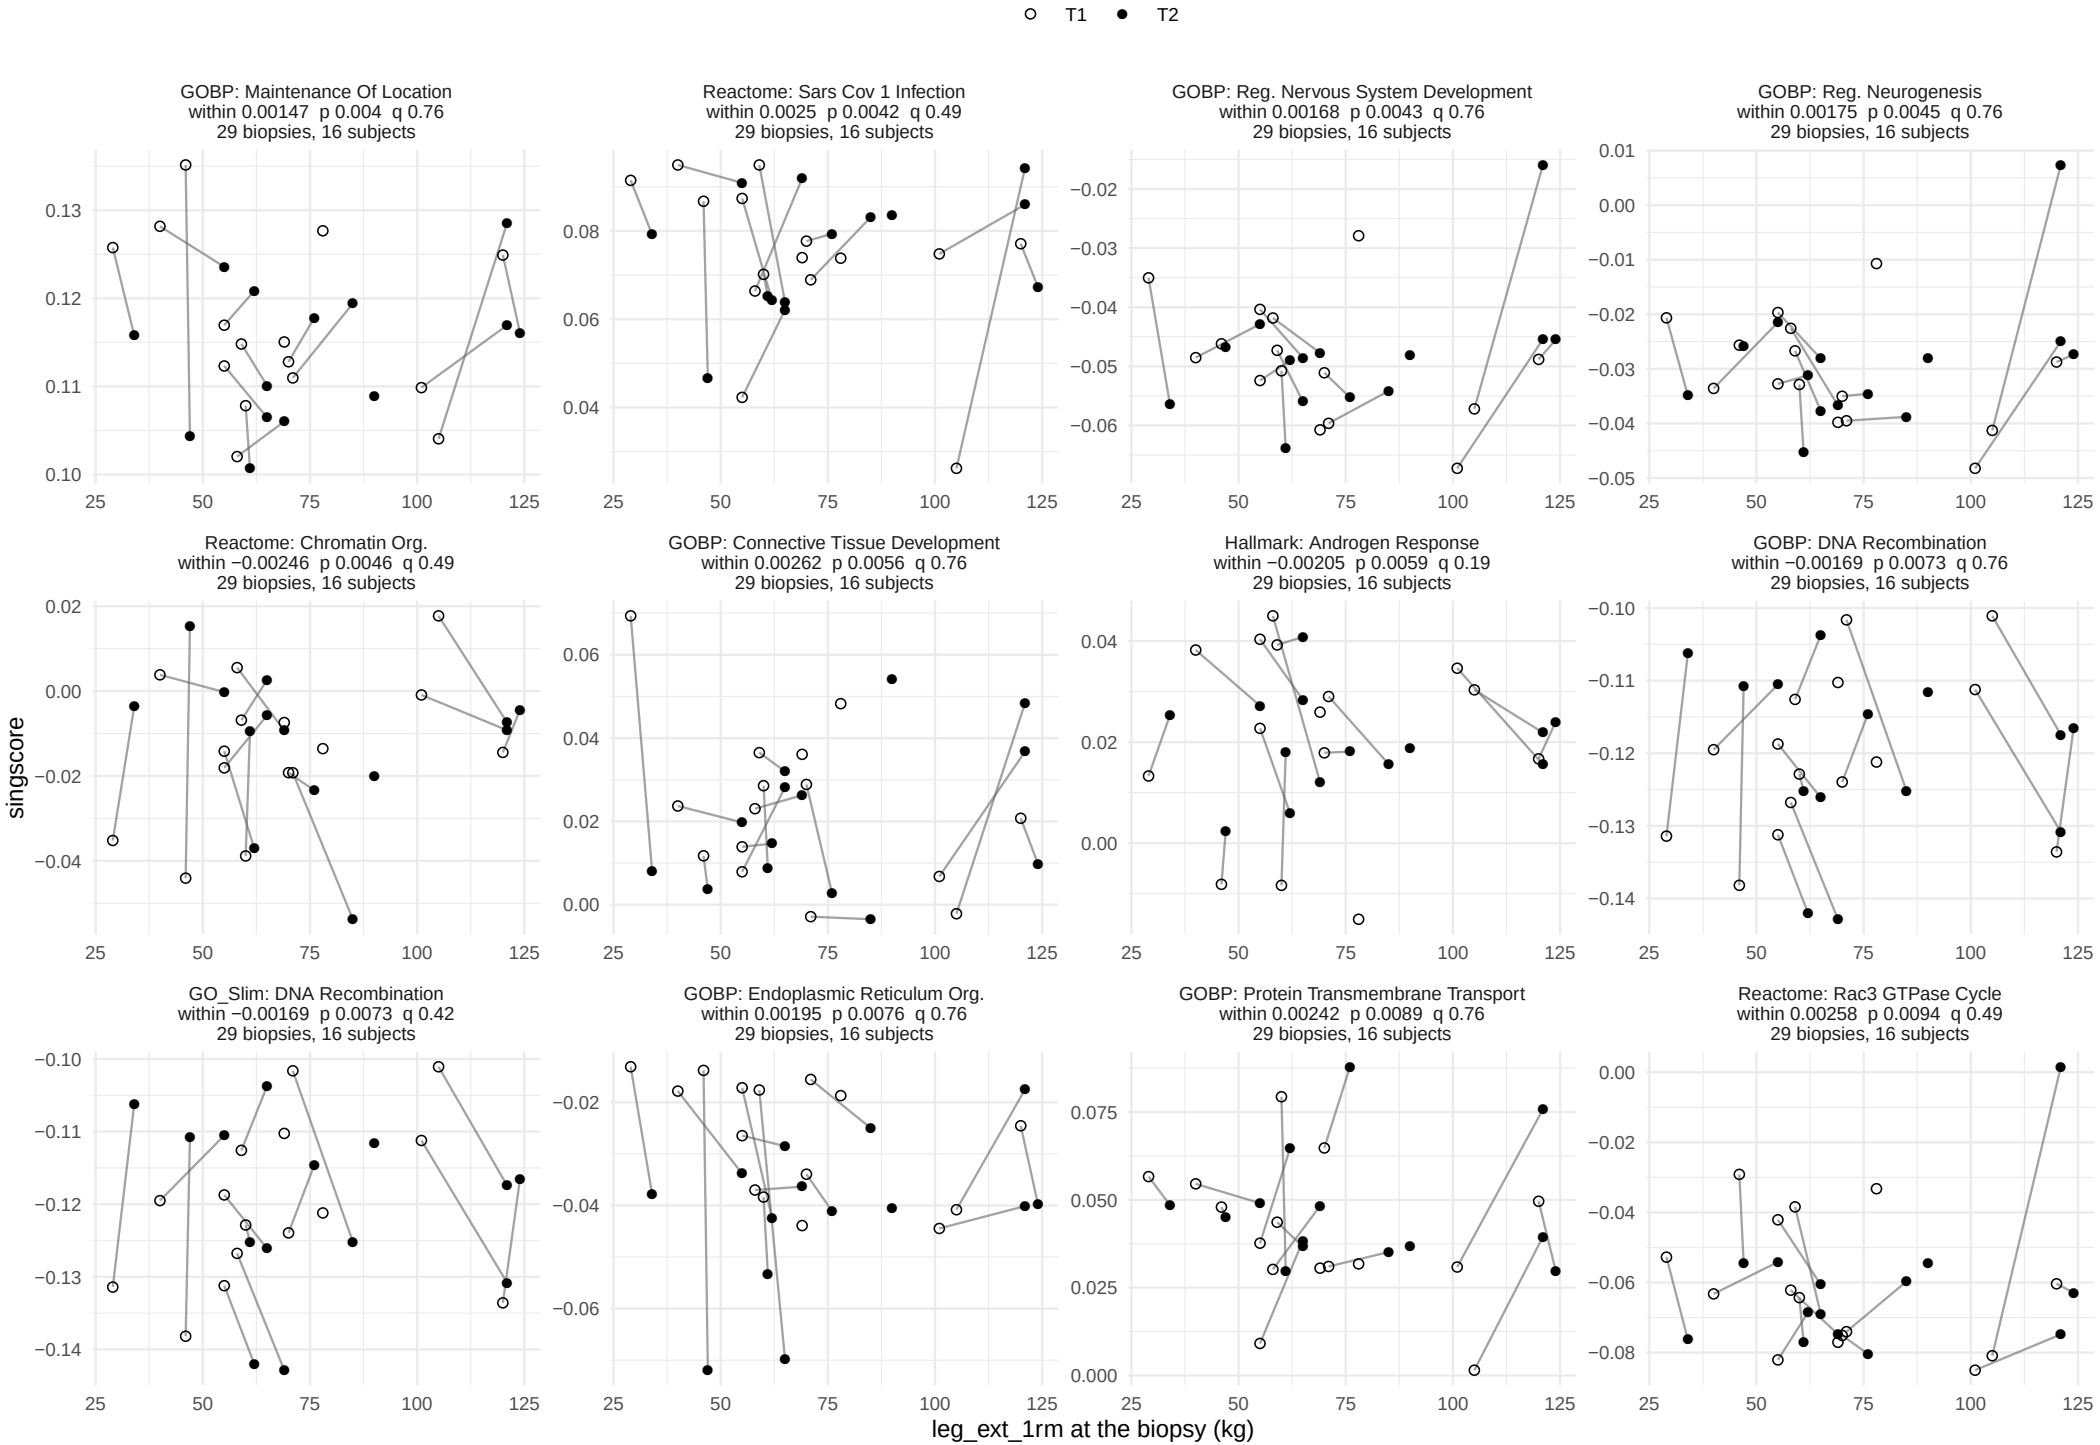

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/02_sets.xlsx, model.

leg_ext_1rm, within−person term


82 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 2 of 7.

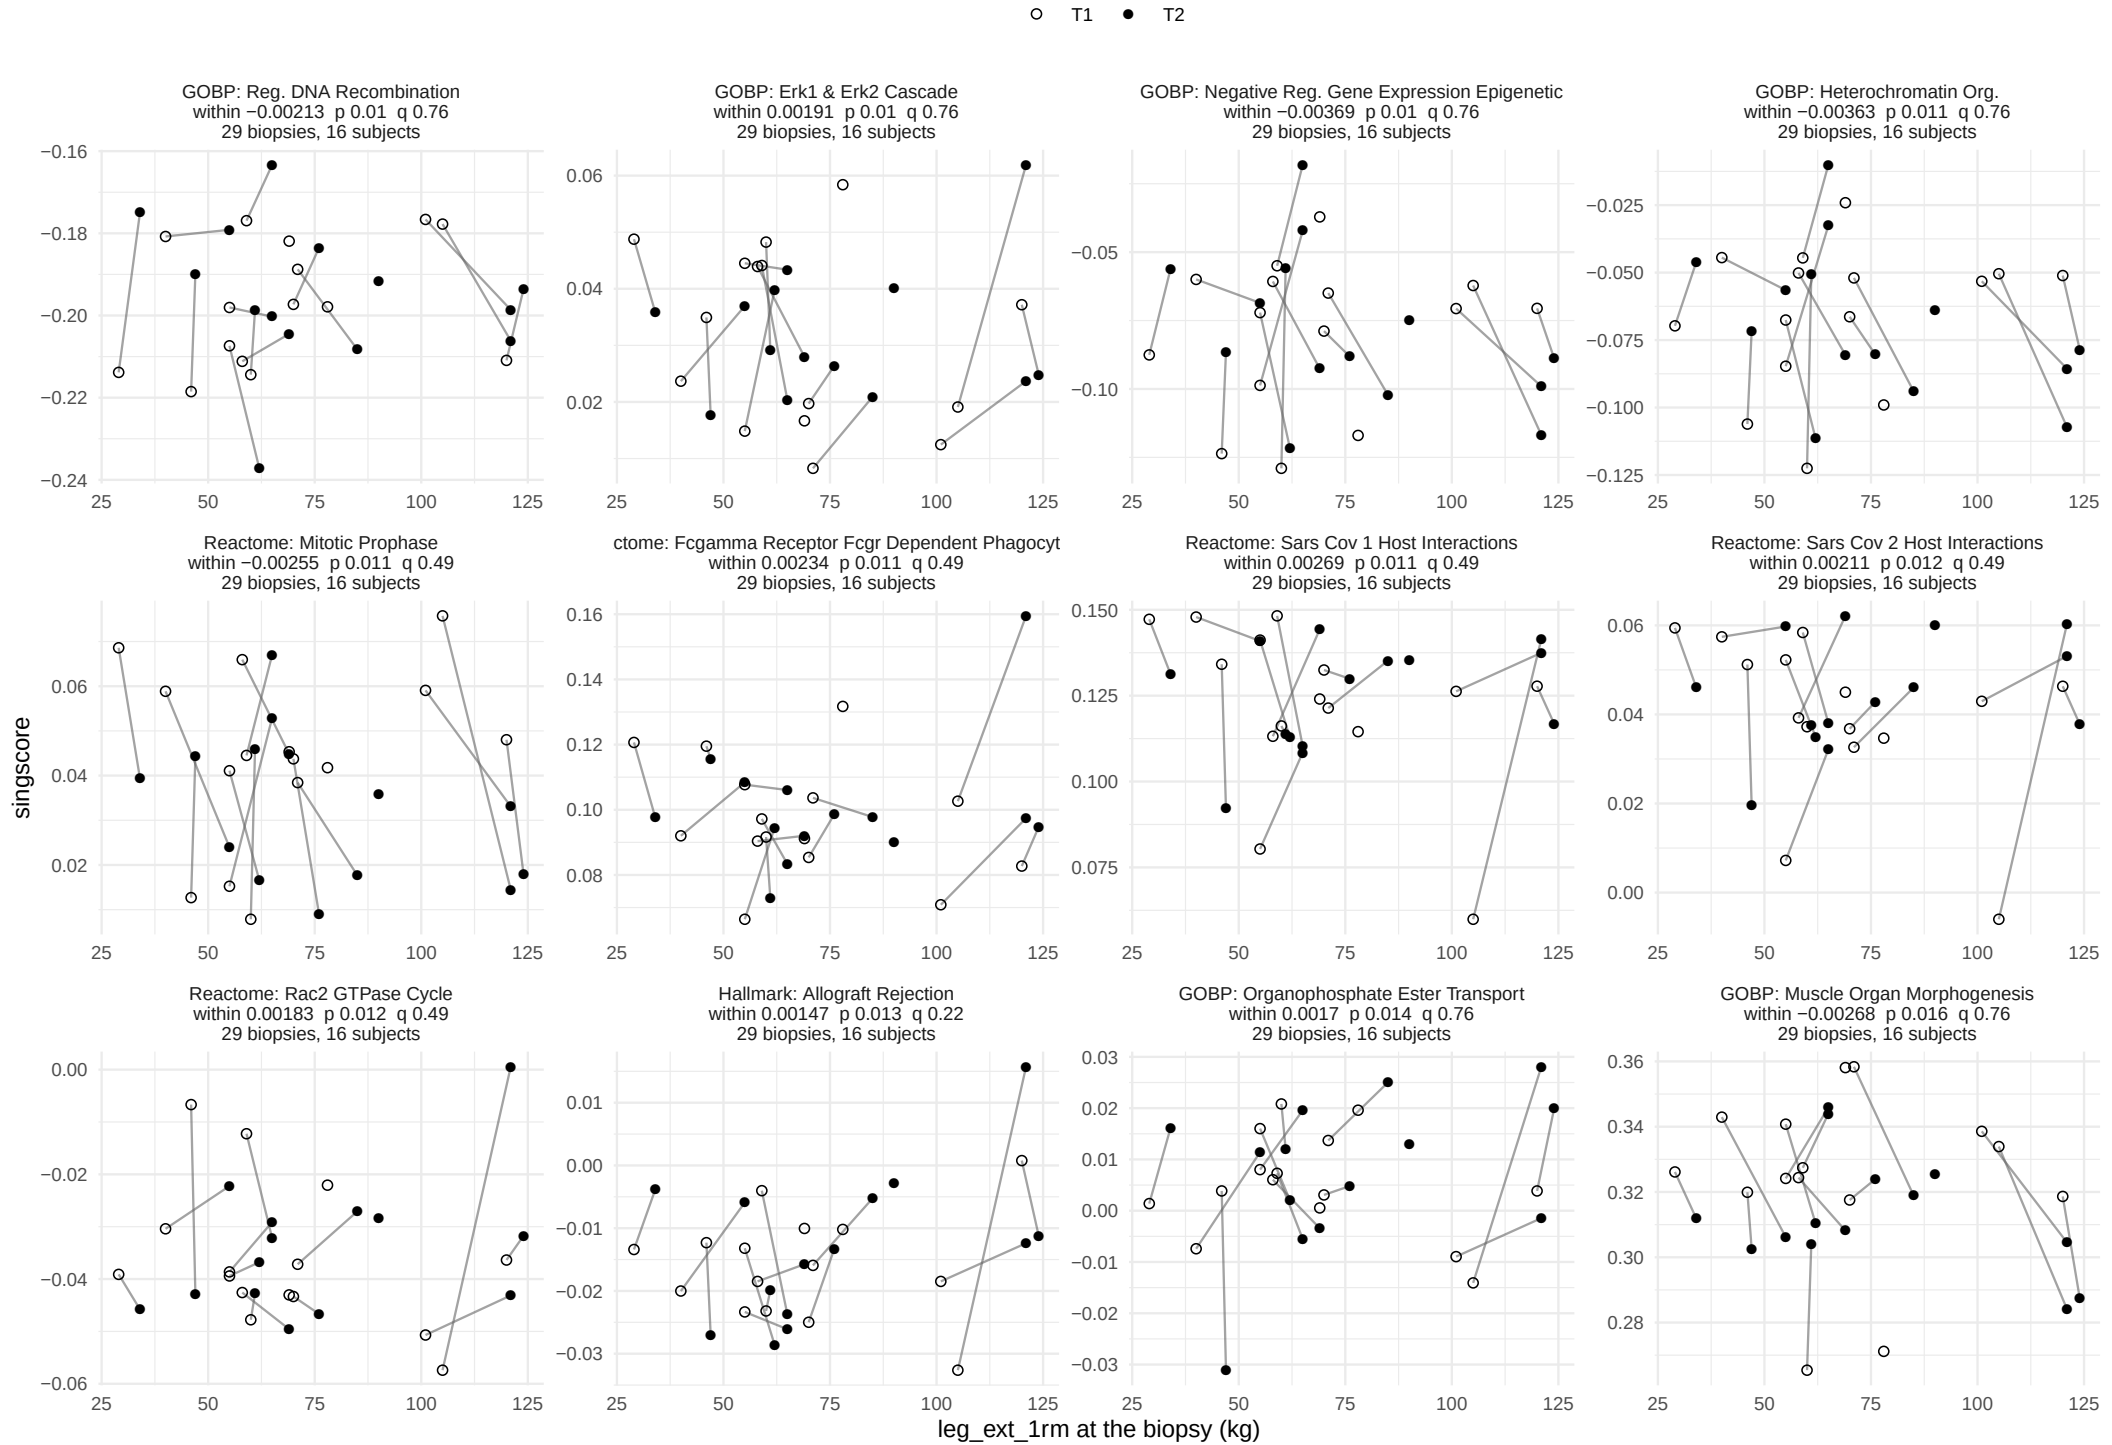

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/02_sets.xlsx, model.

leg_ext_1rm, within−person term


82 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 3 of 7.

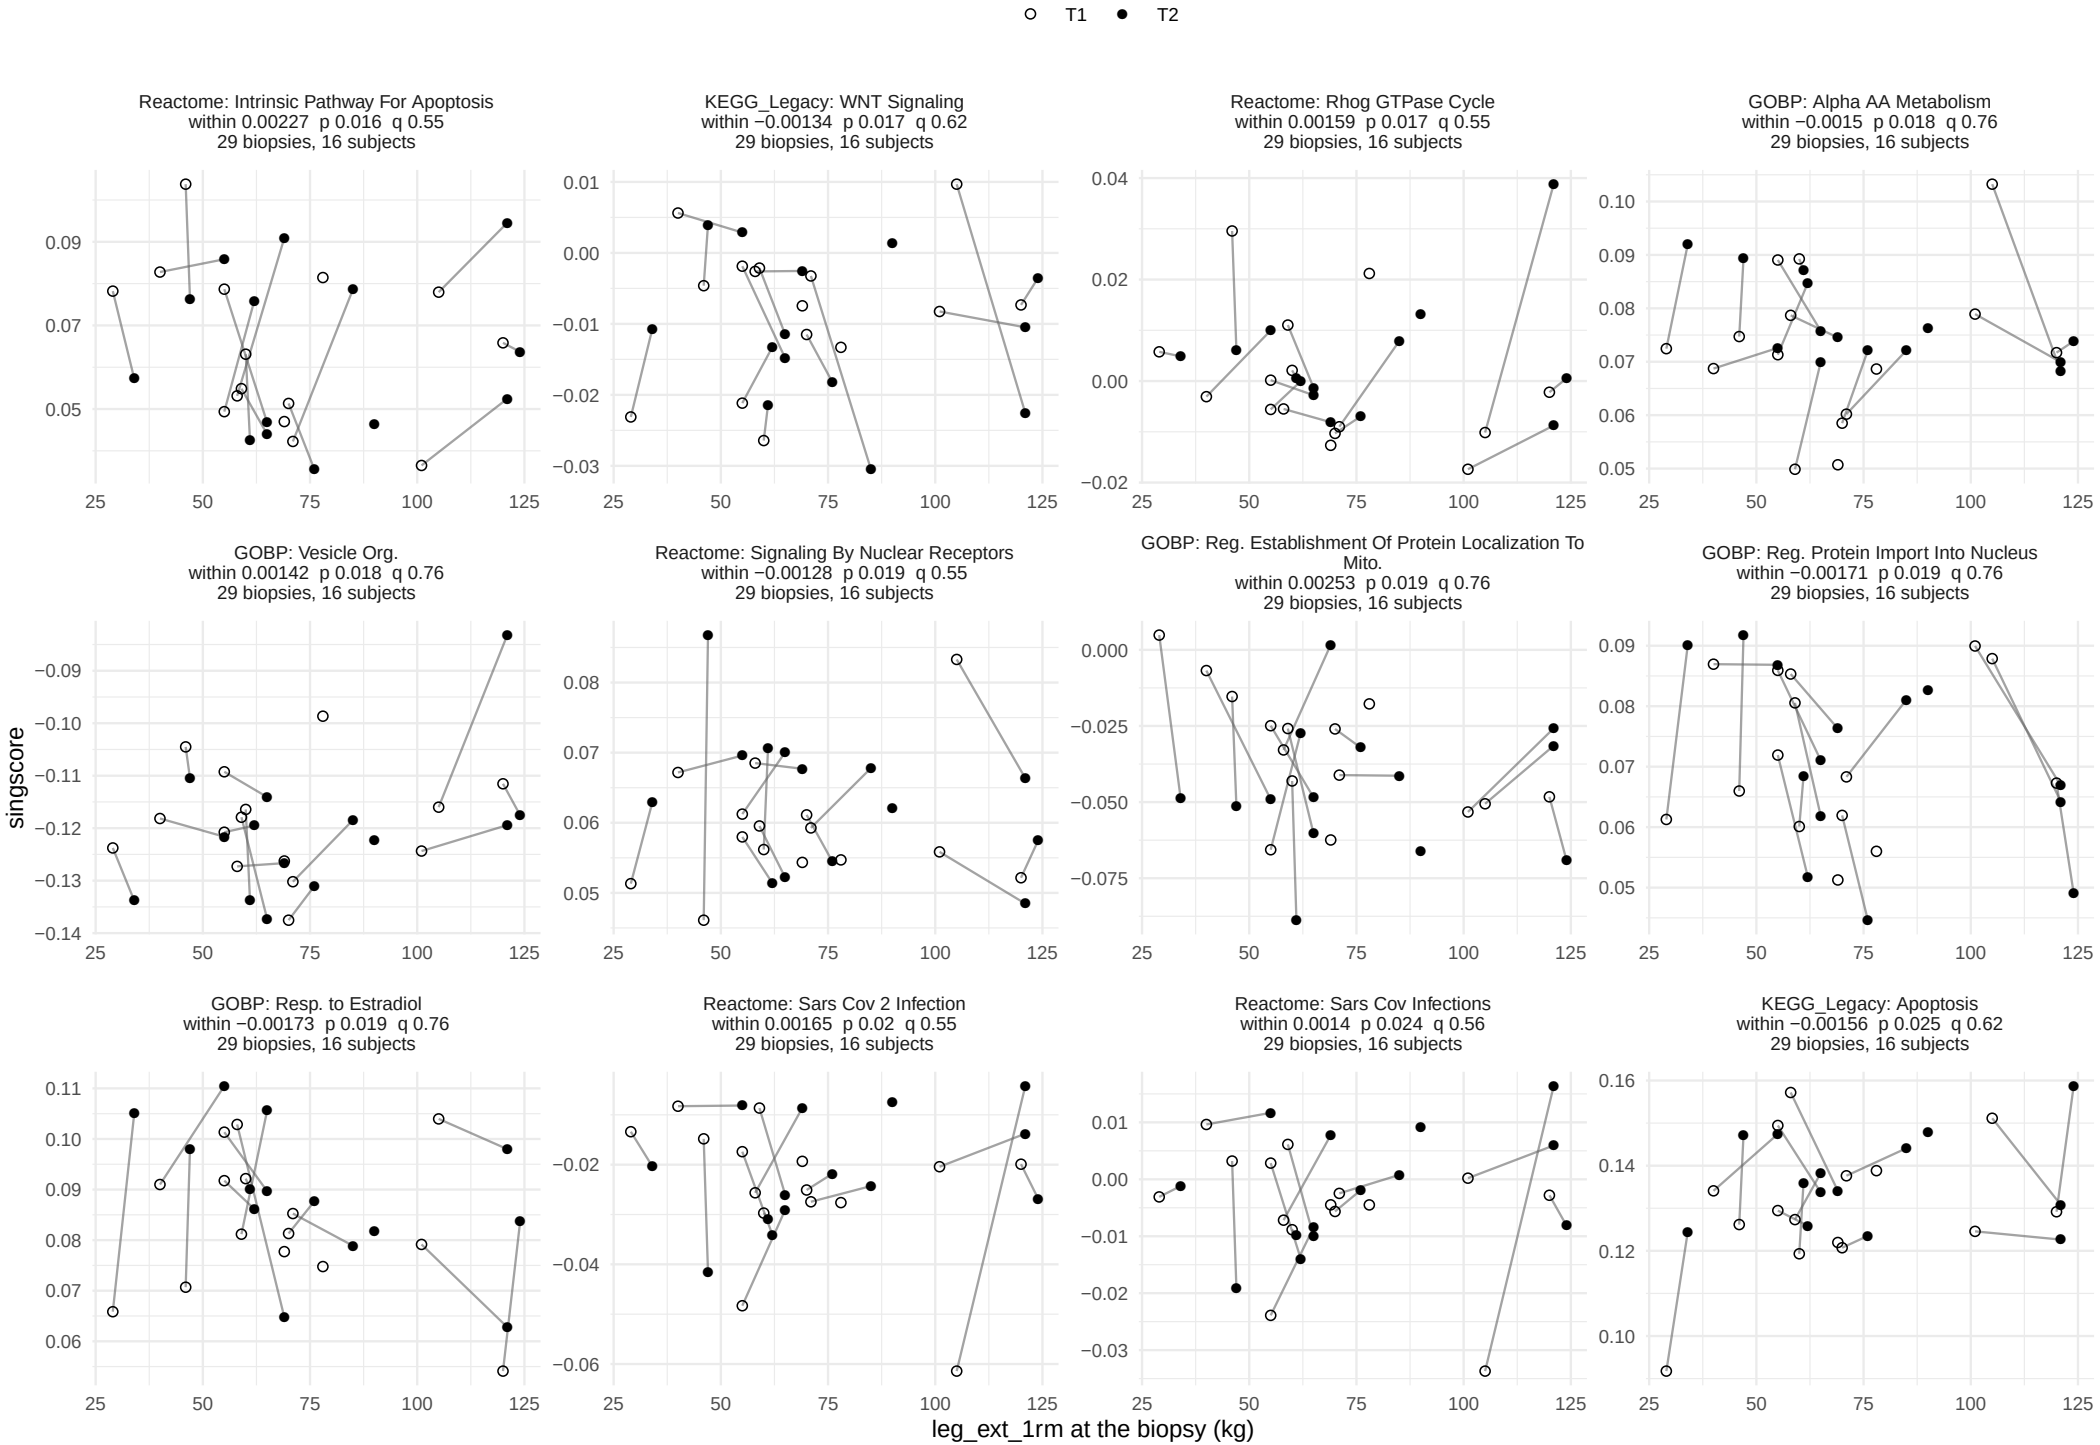

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/02_sets.xlsx, model.

leg_ext_1rm, within−person term


82 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 4 of 7.

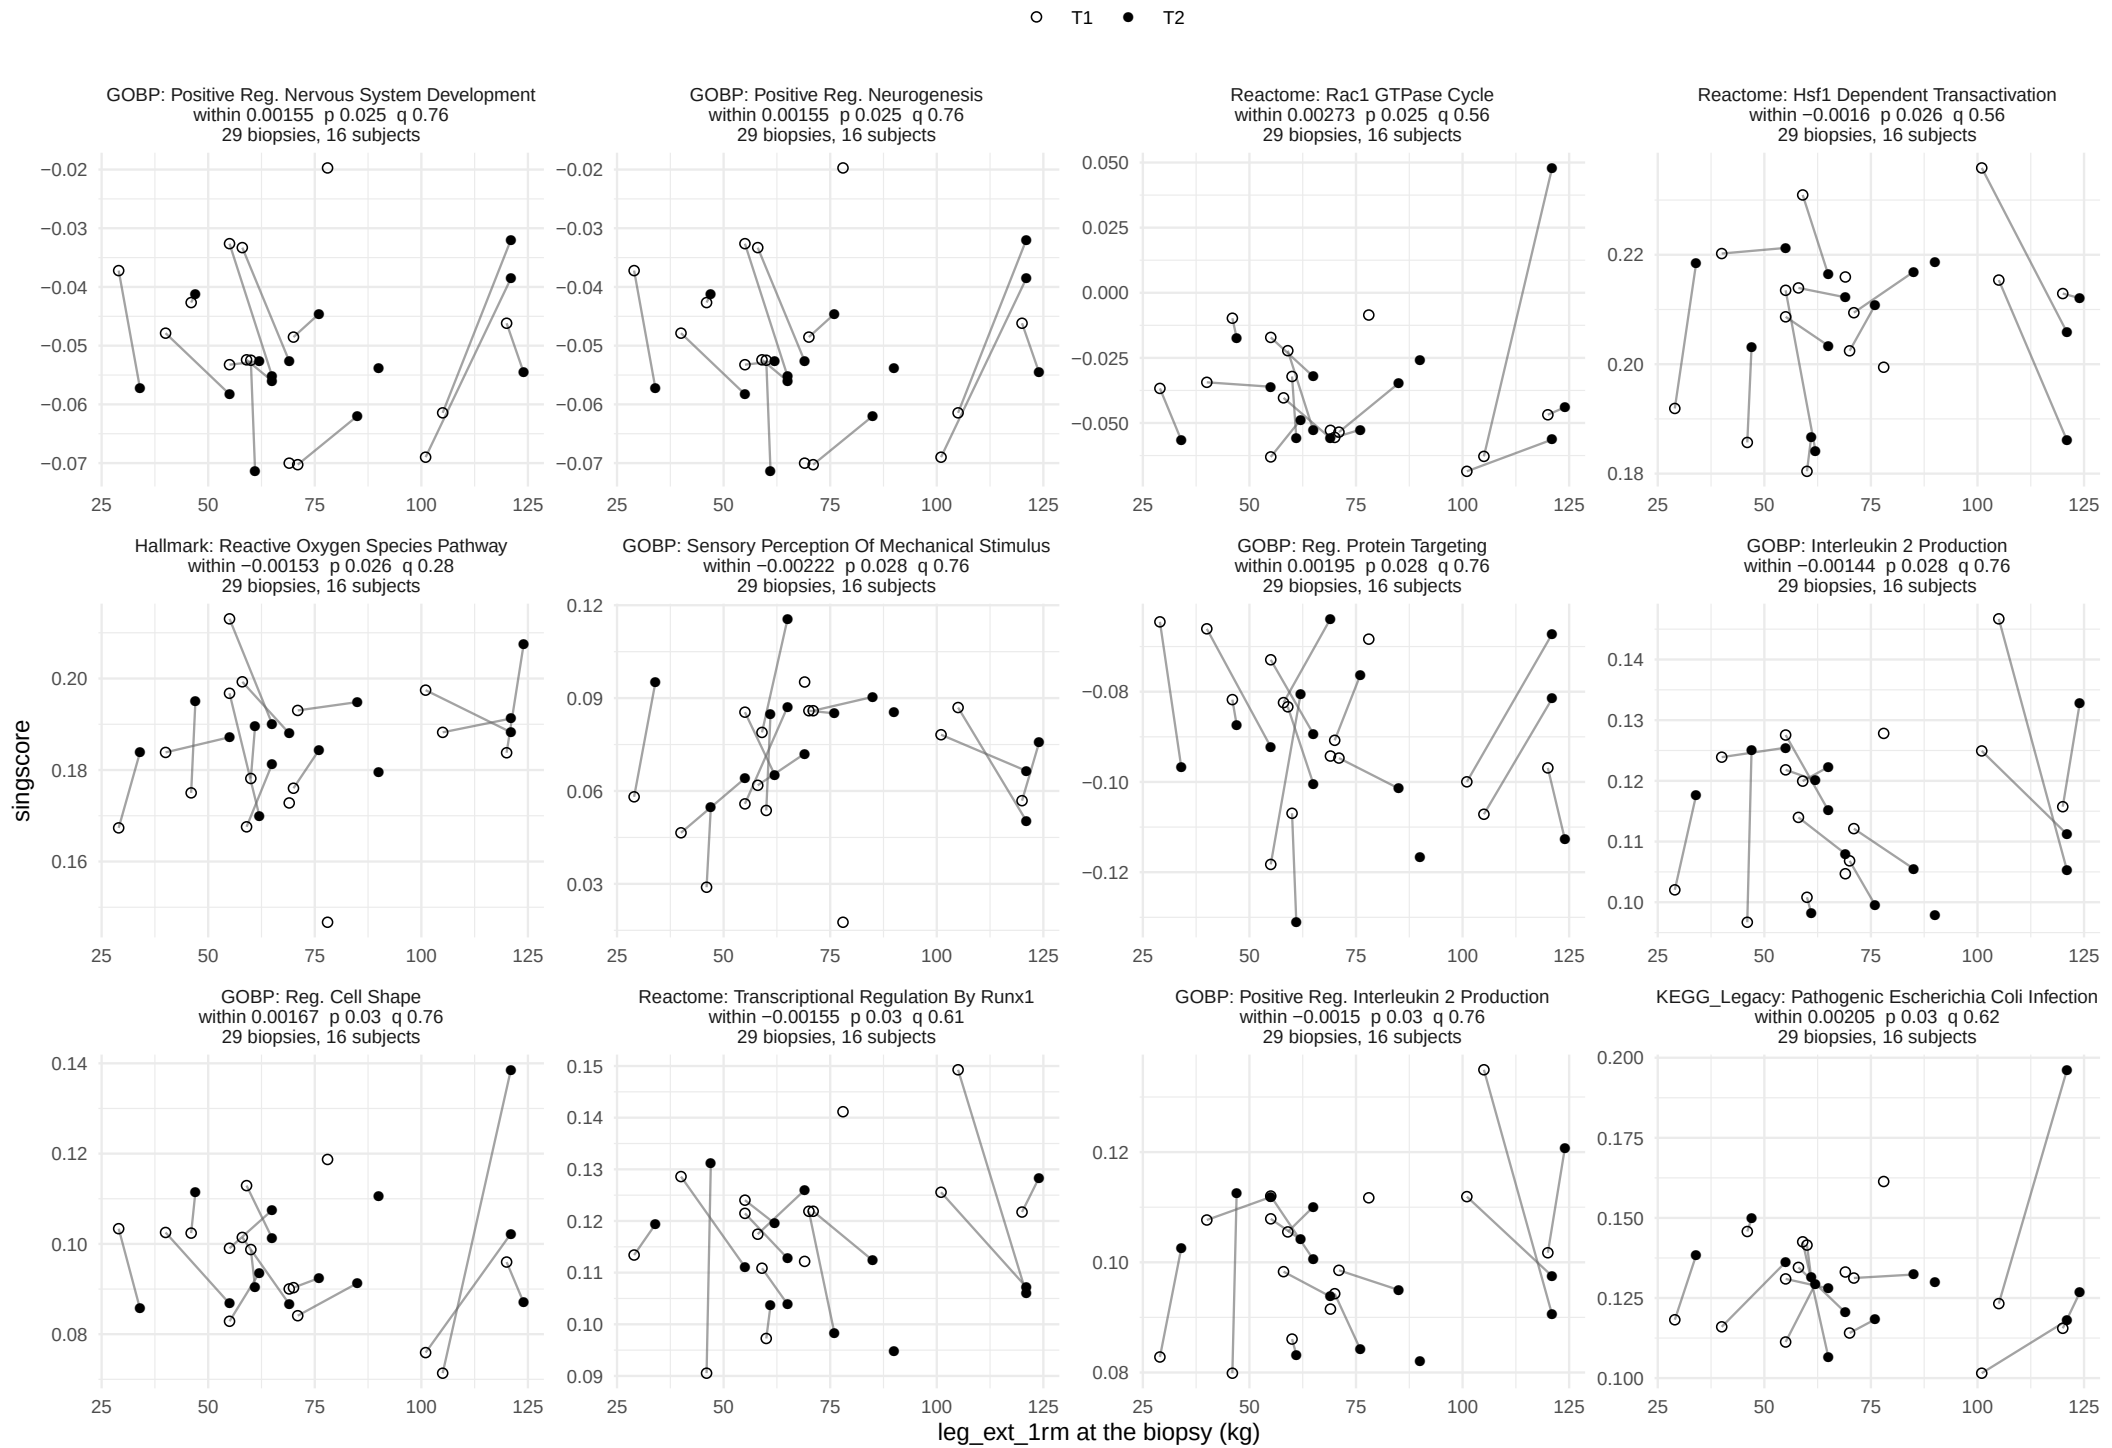

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/02_sets.xlsx, model.

leg_ext_1rm, within−person term


82 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 5 of 7.

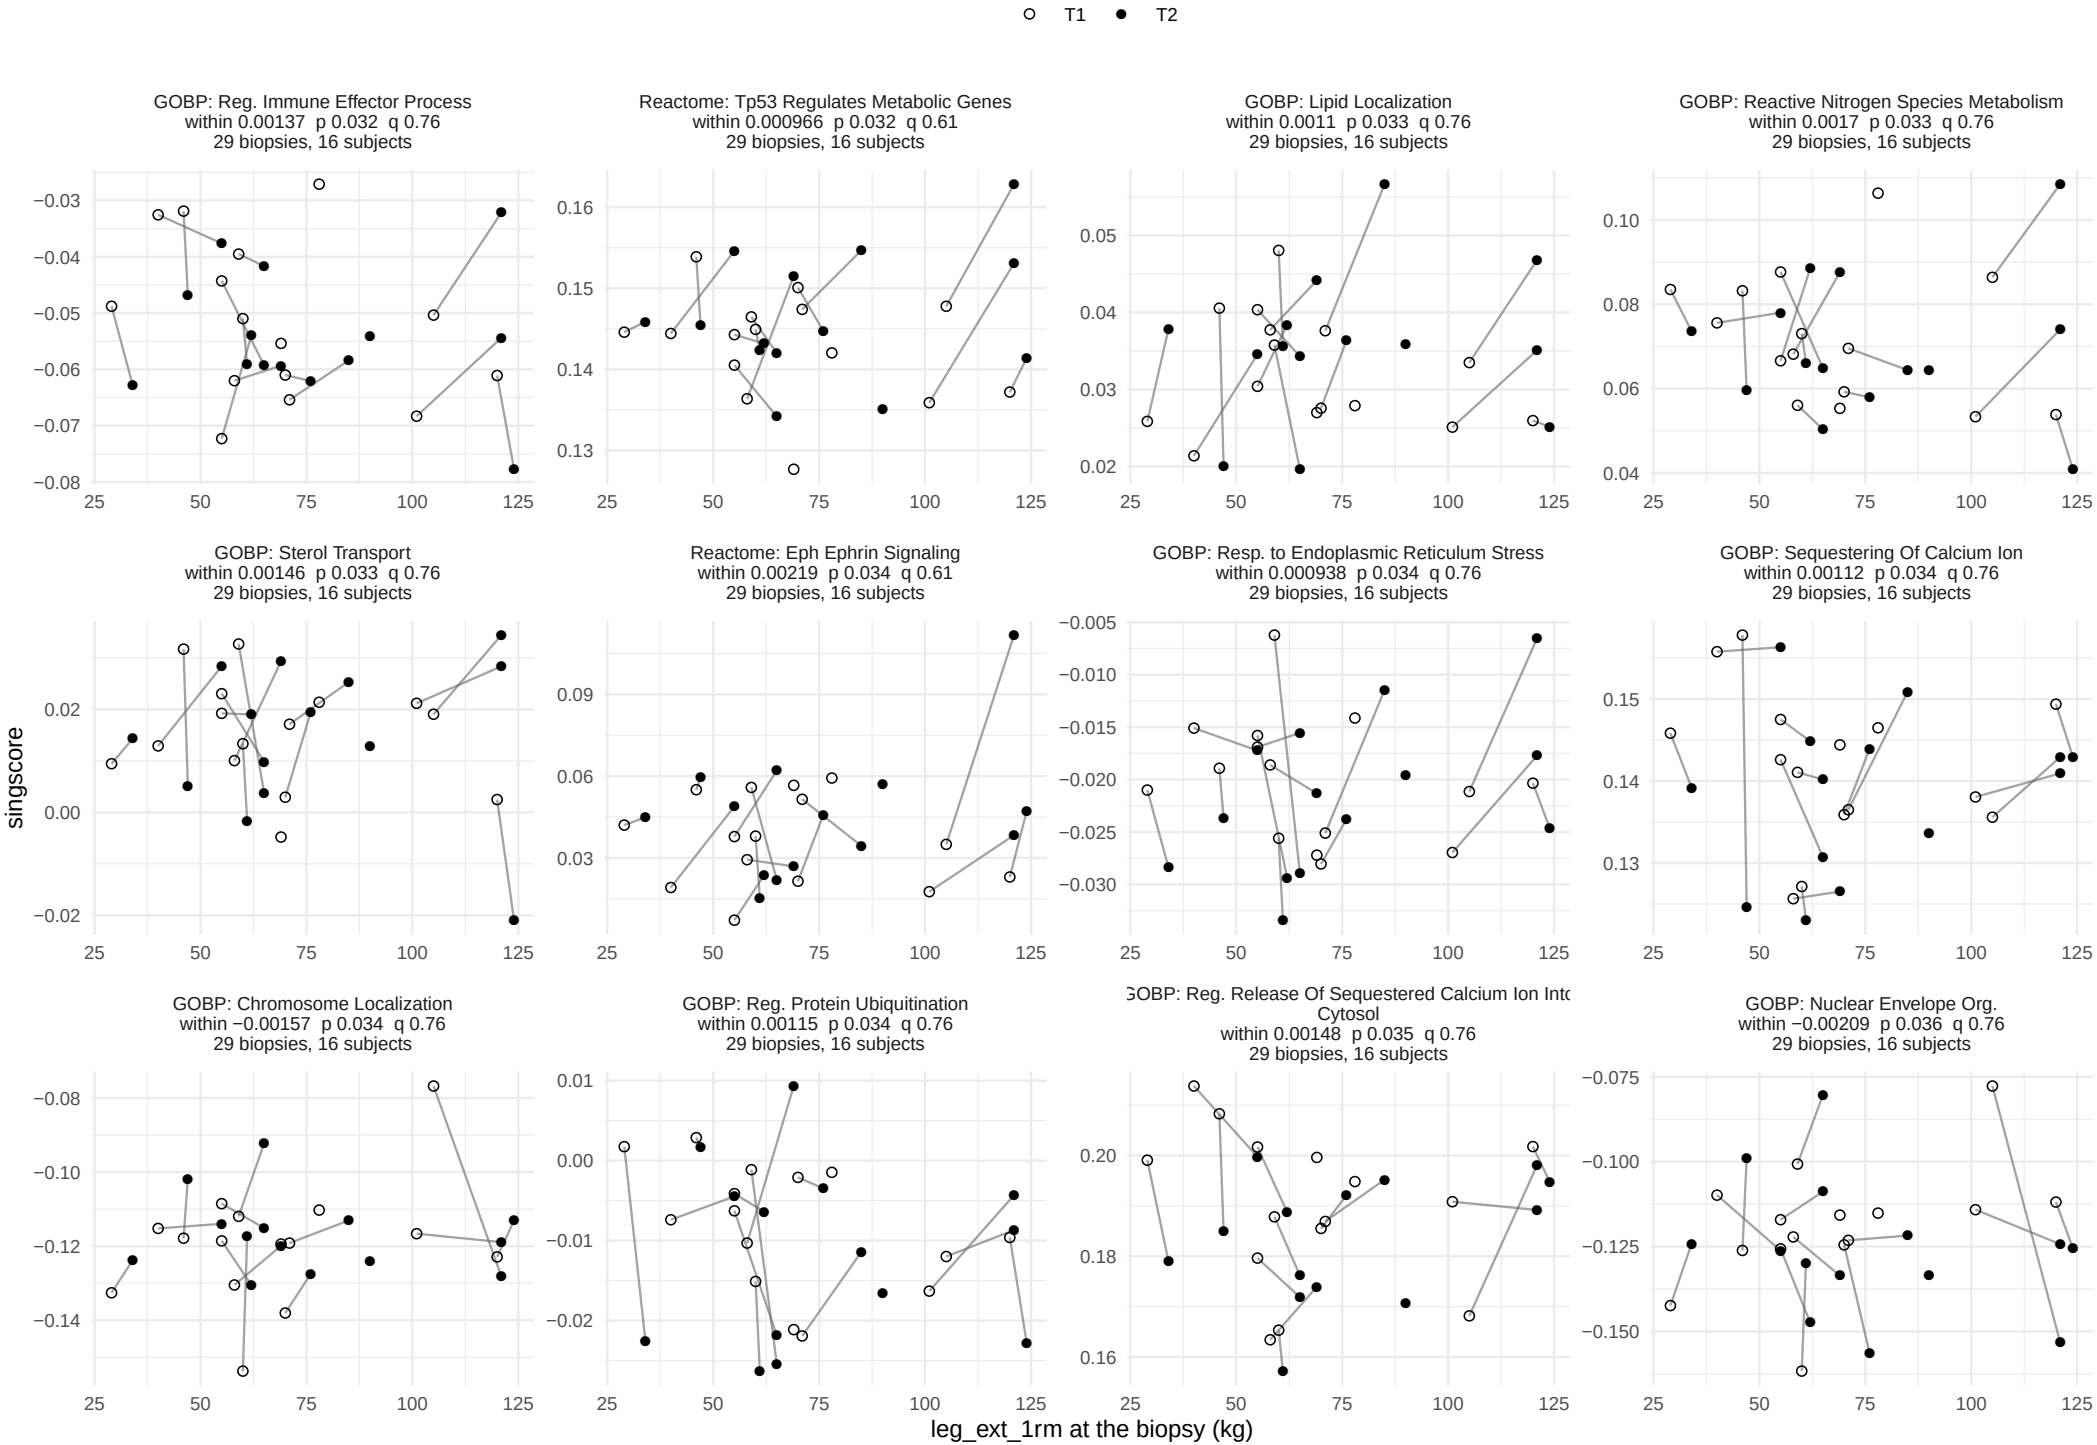

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/02_sets.xlsx, model.

leg_ext_1rm, within−person term


82 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 6 of 7.

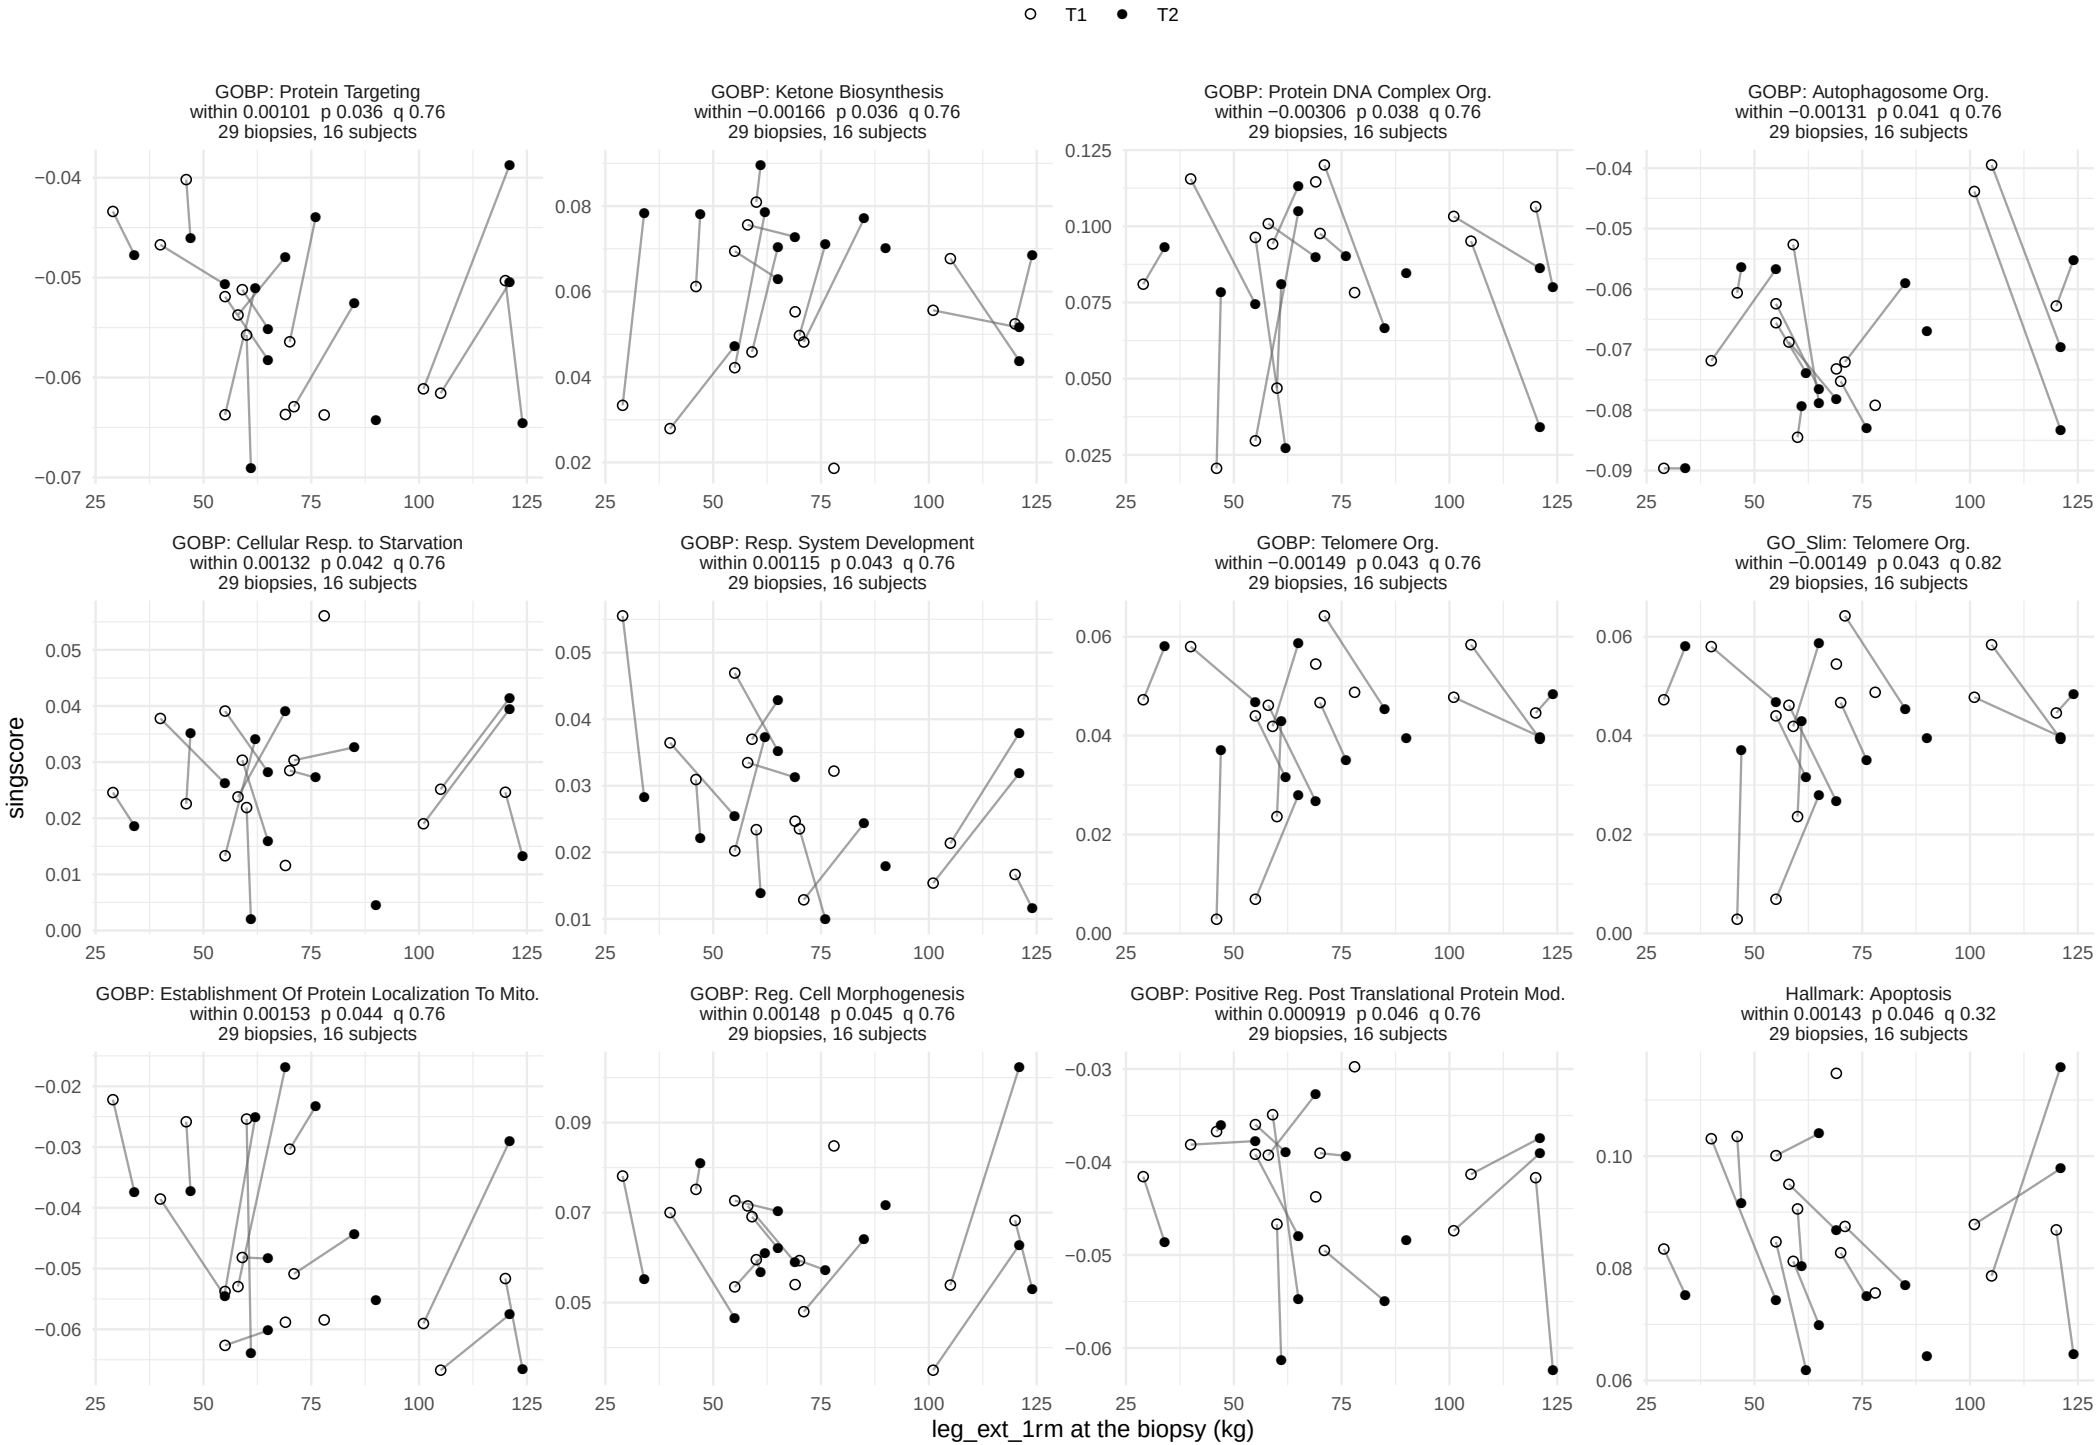

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/02_sets.xlsx, model.

leg_ext_1rm, within−person term


82 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 7 of 7.

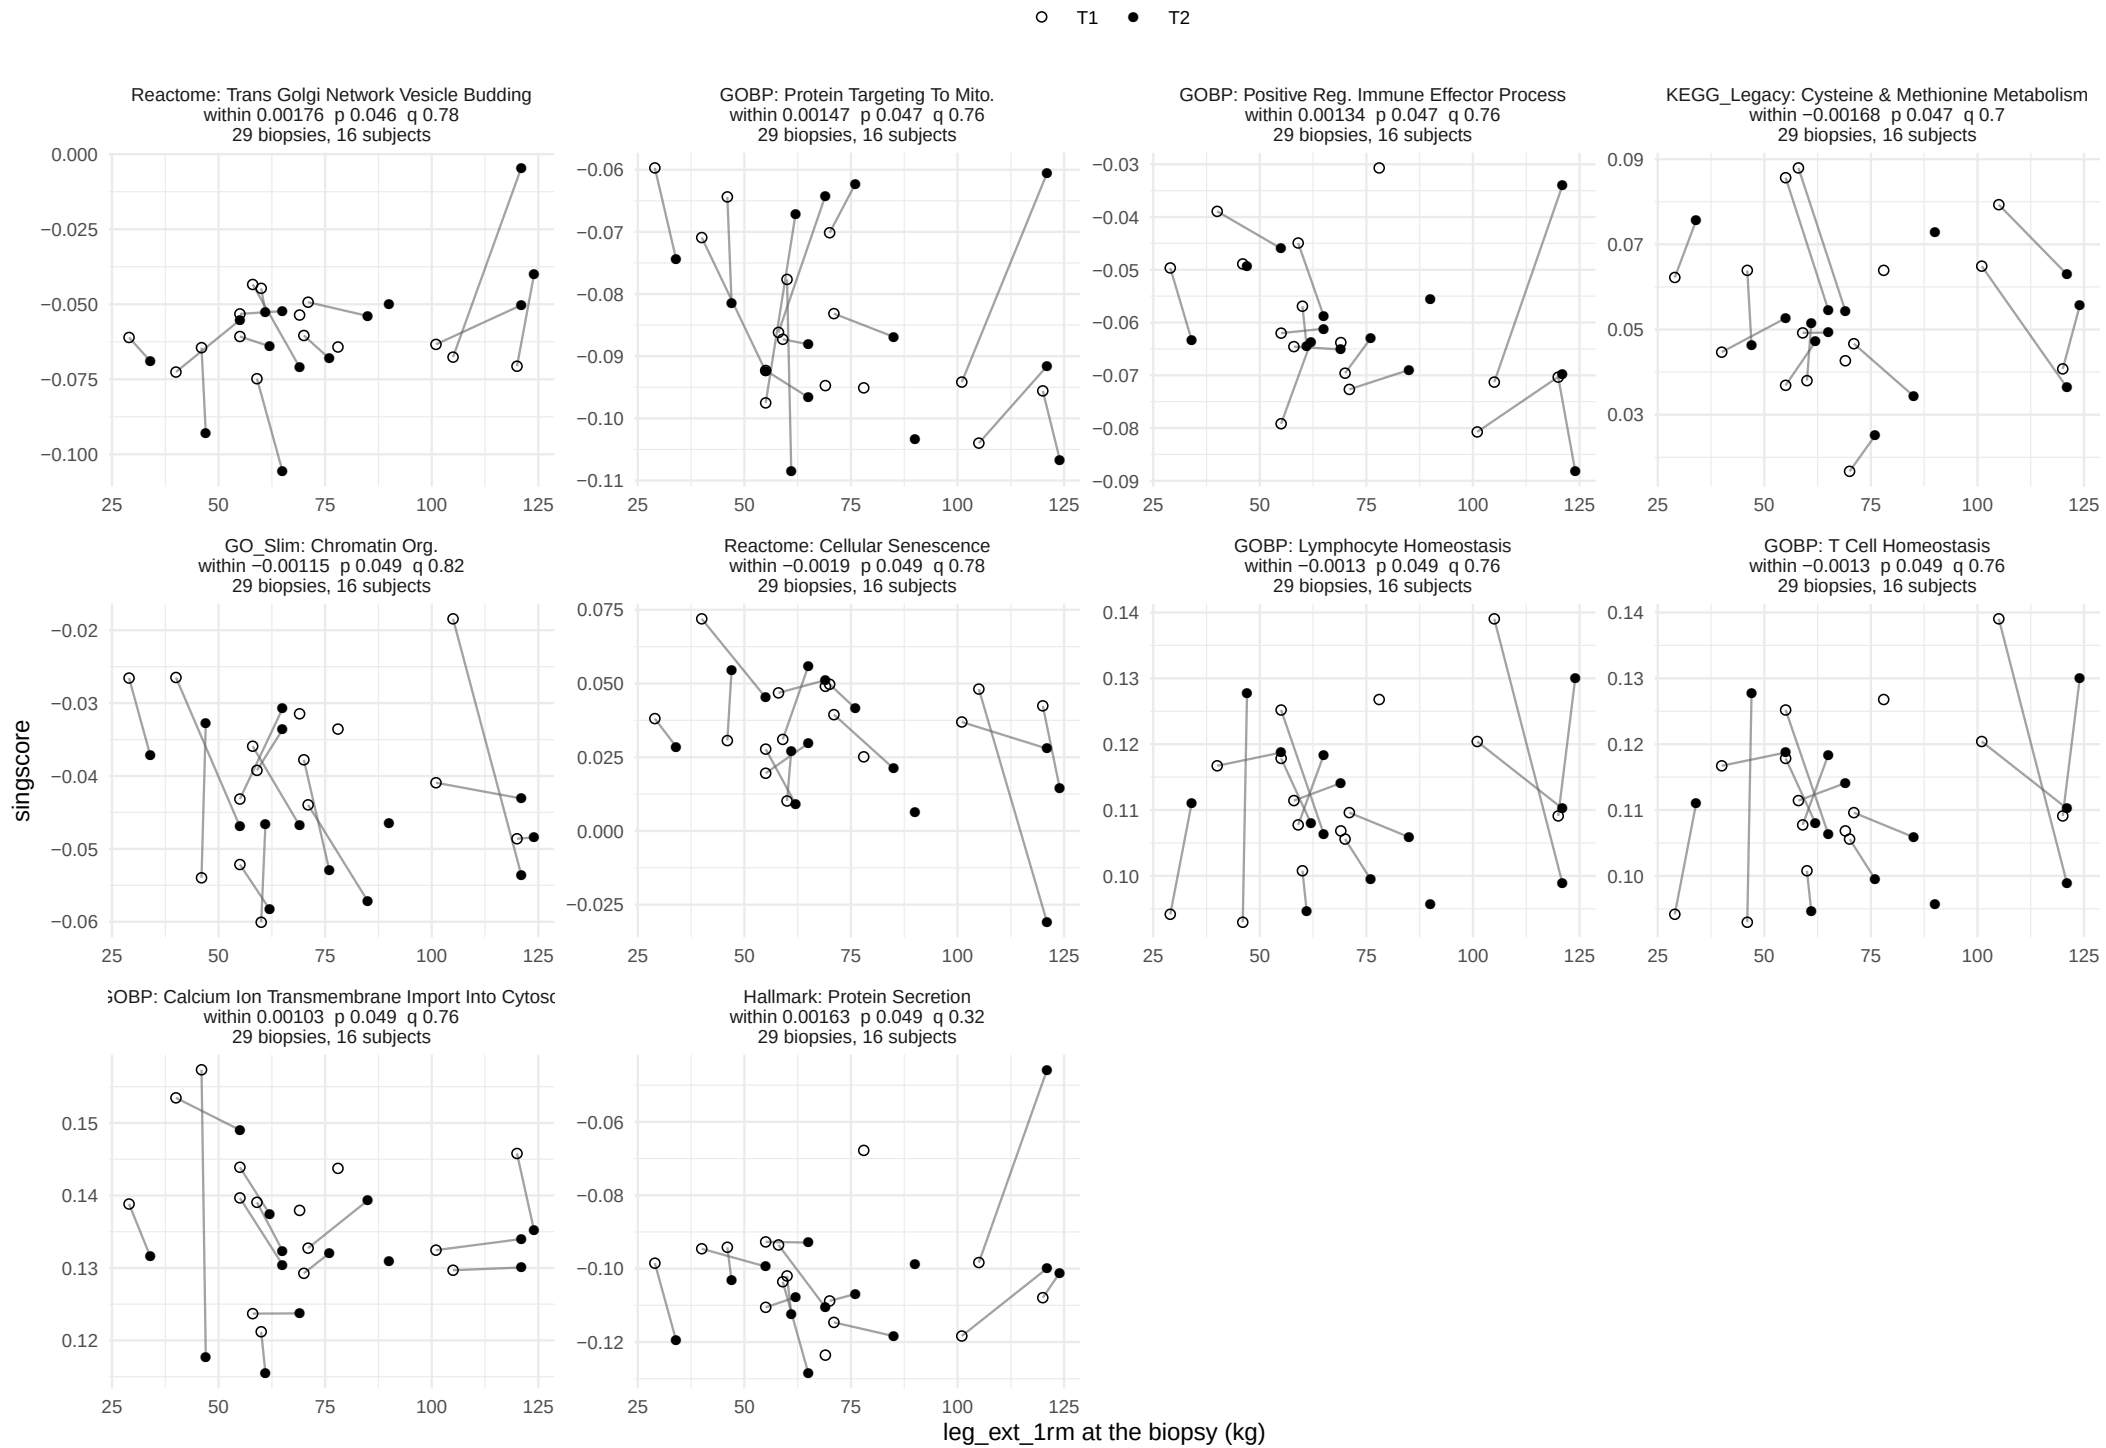

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/02_sets.xlsx, model.

leg_ext_1rm, between−person term


49 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 1 of 5.

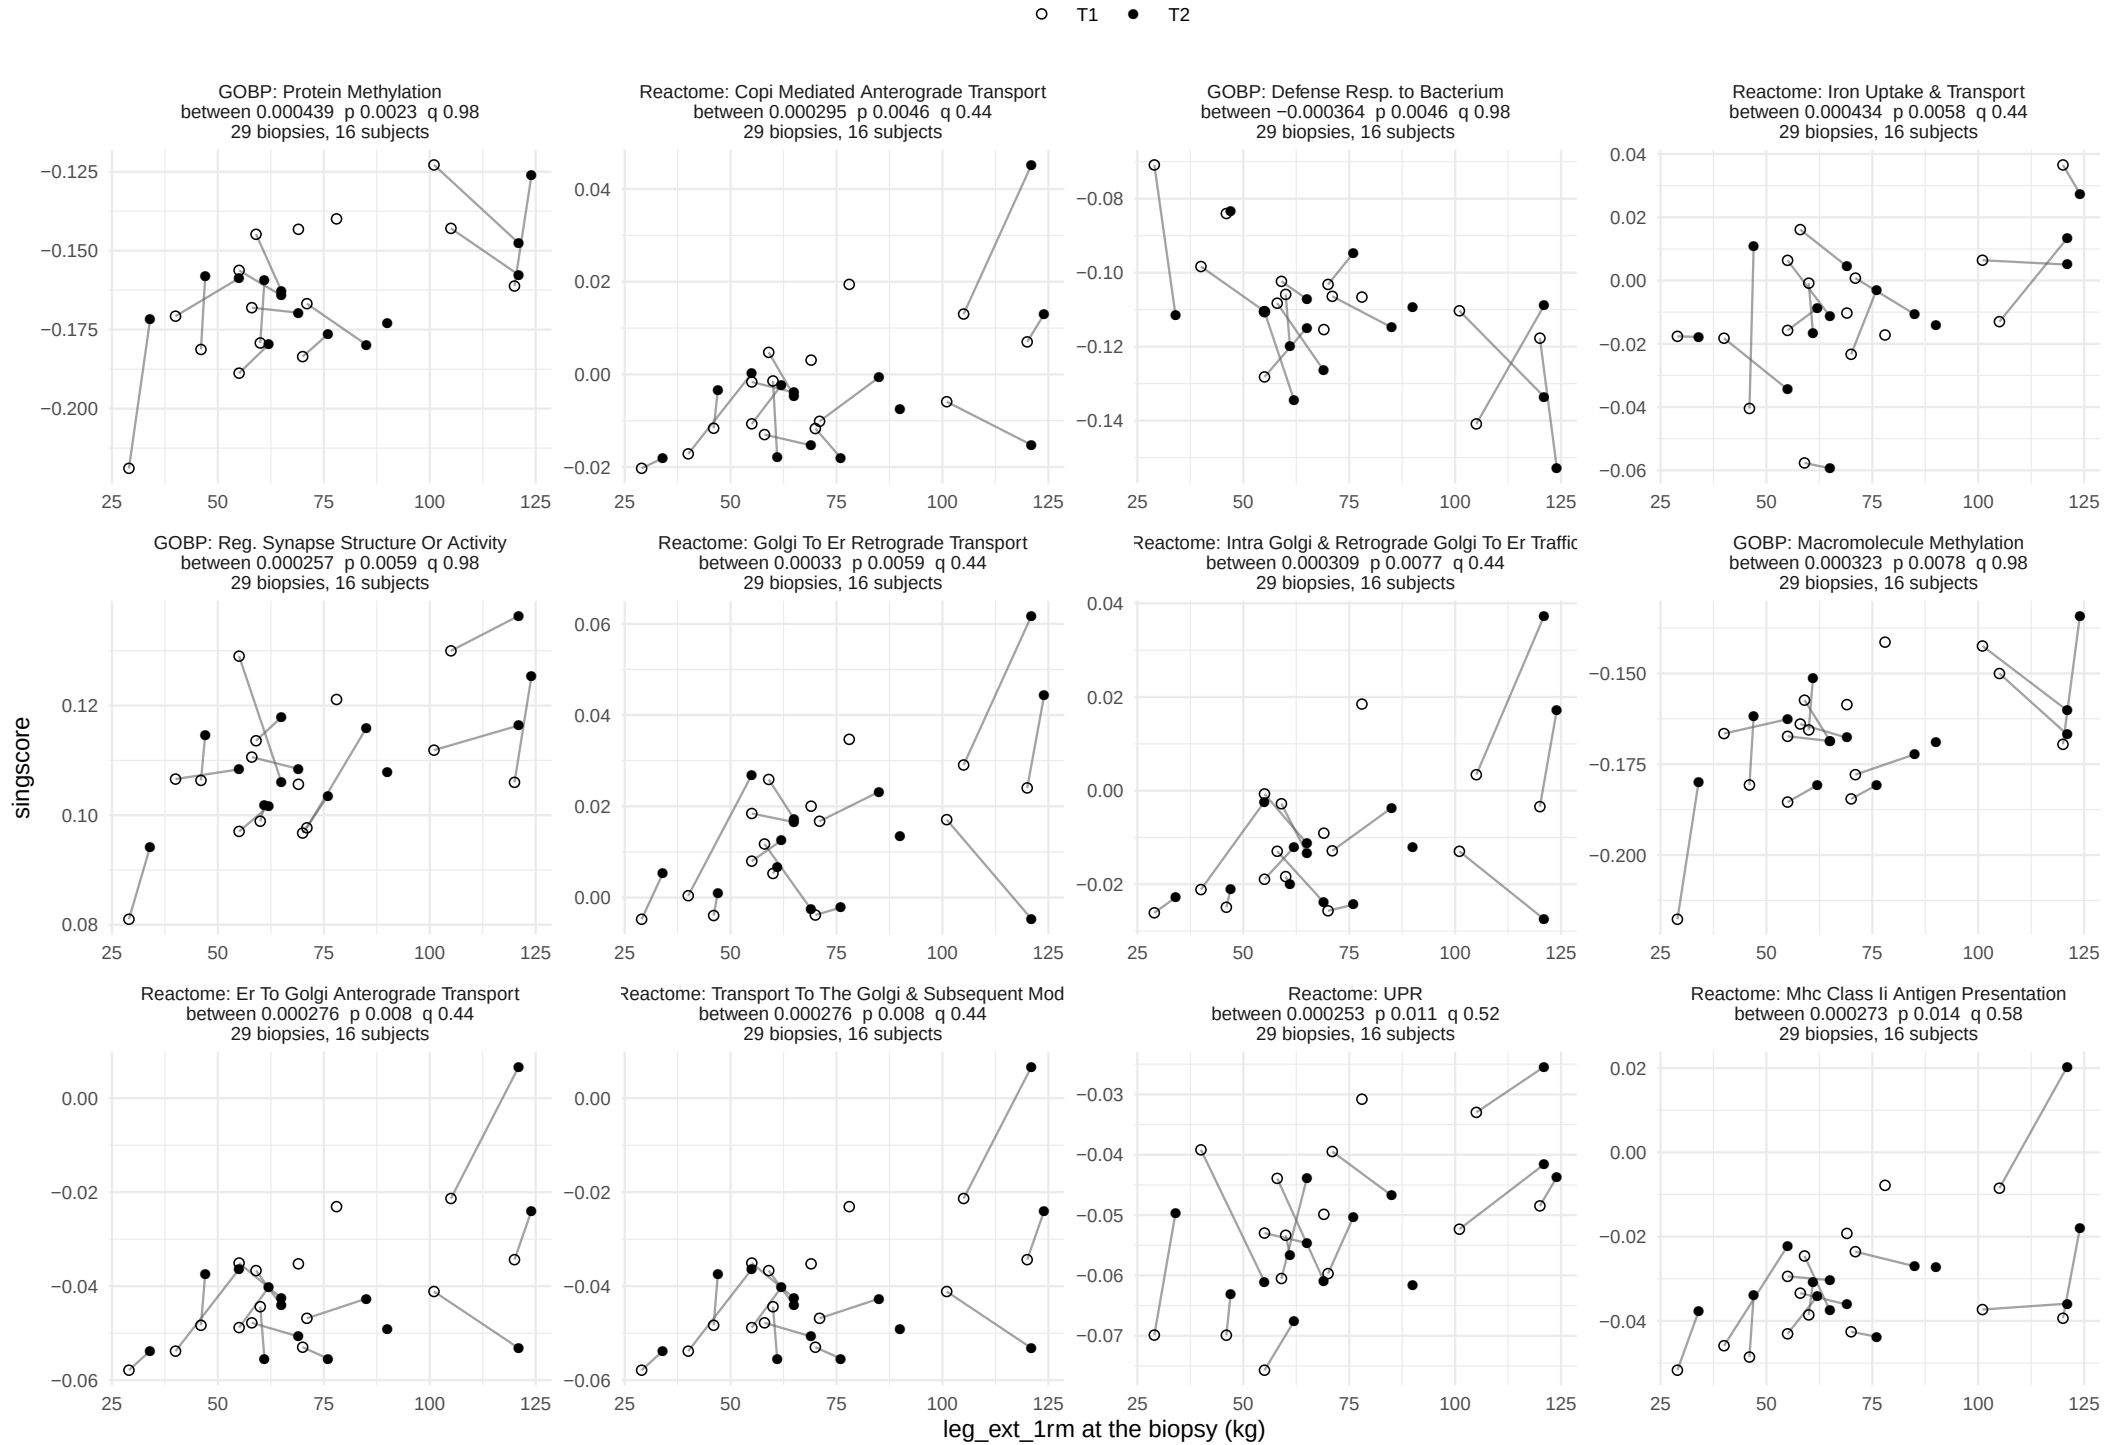

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/02_sets.xlsx, model.

leg_ext_1rm, between−person term


49 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 2 of 5.

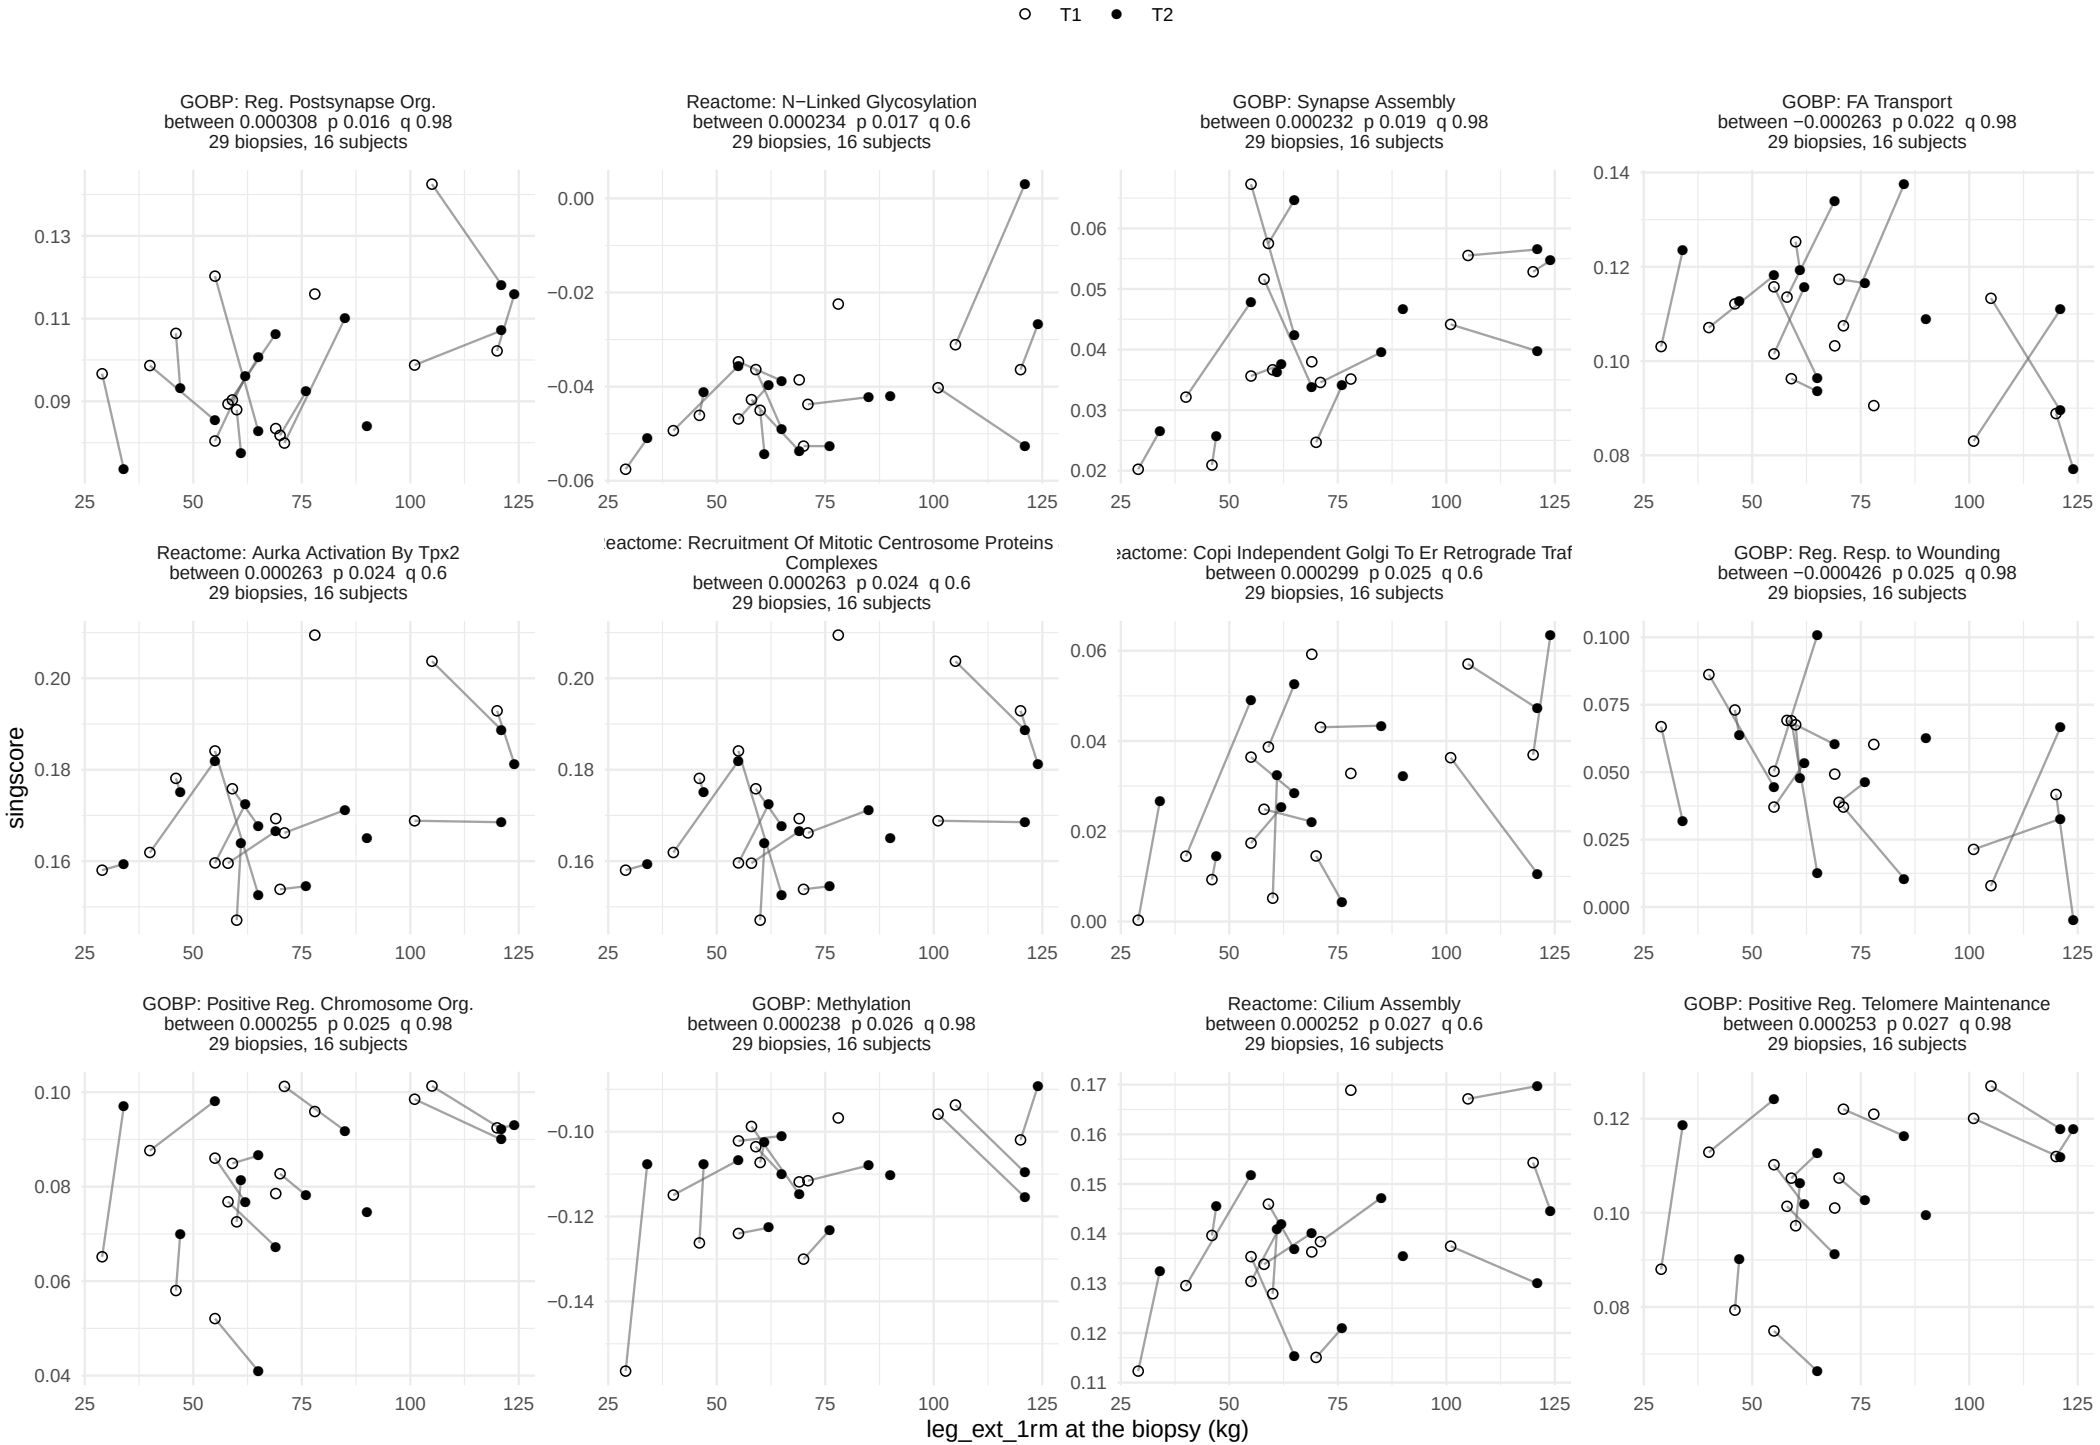

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/02_sets.xlsx, model.

leg_ext_1rm, between−person term


49 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 3 of 5.

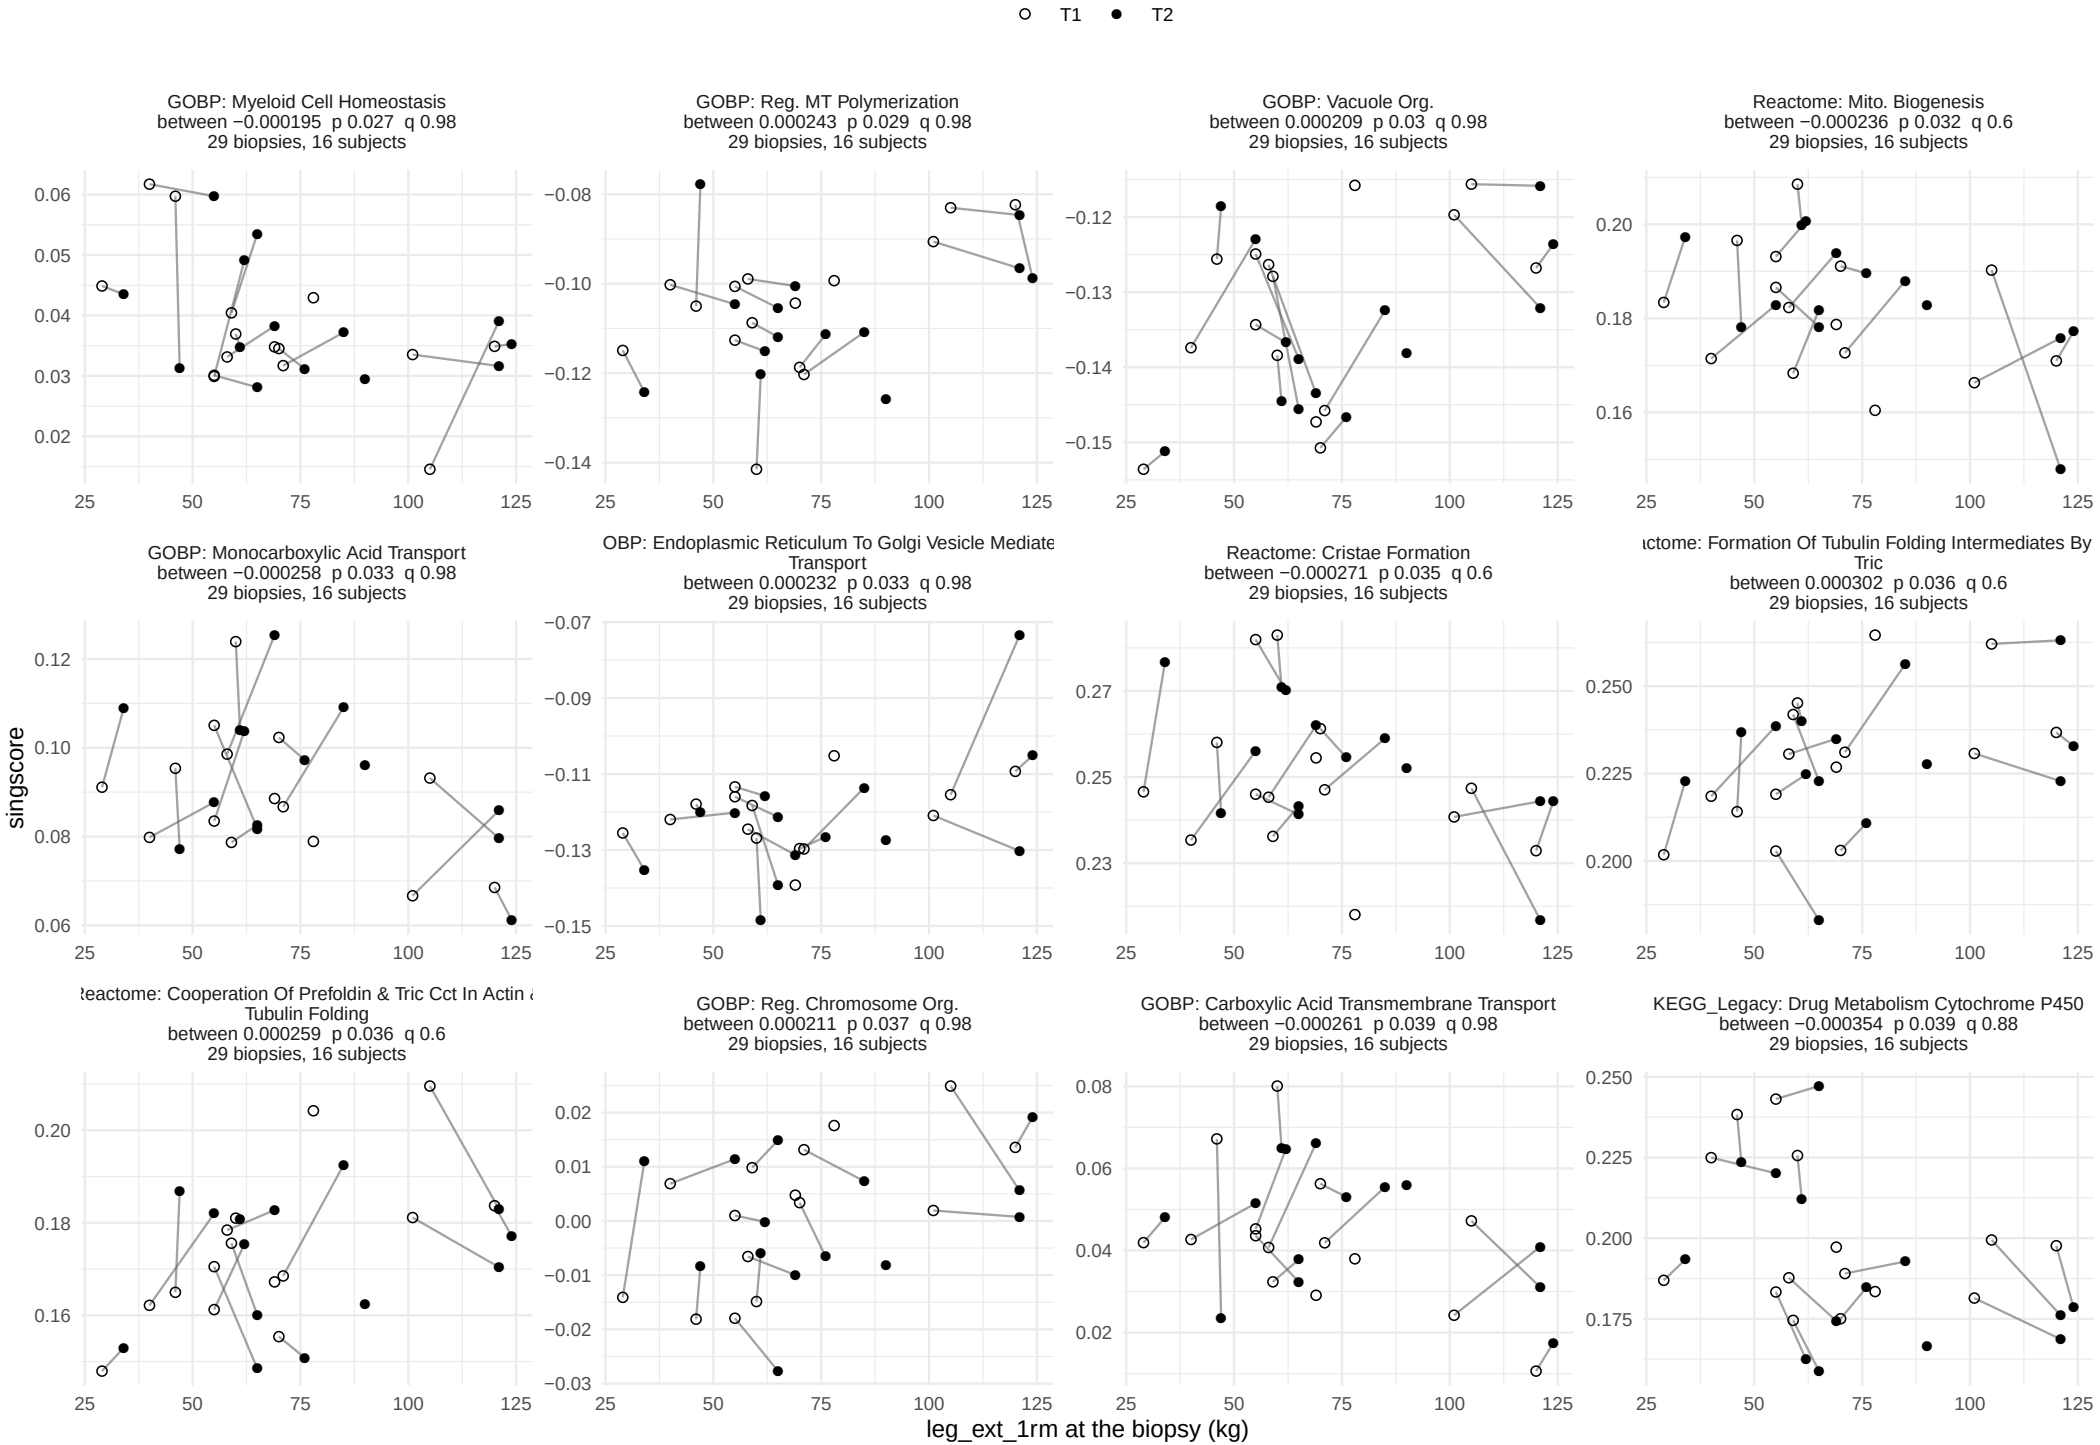

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/02_sets.xlsx, model.


leg_ext_1rm, between−person term

49 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 4 of 5.

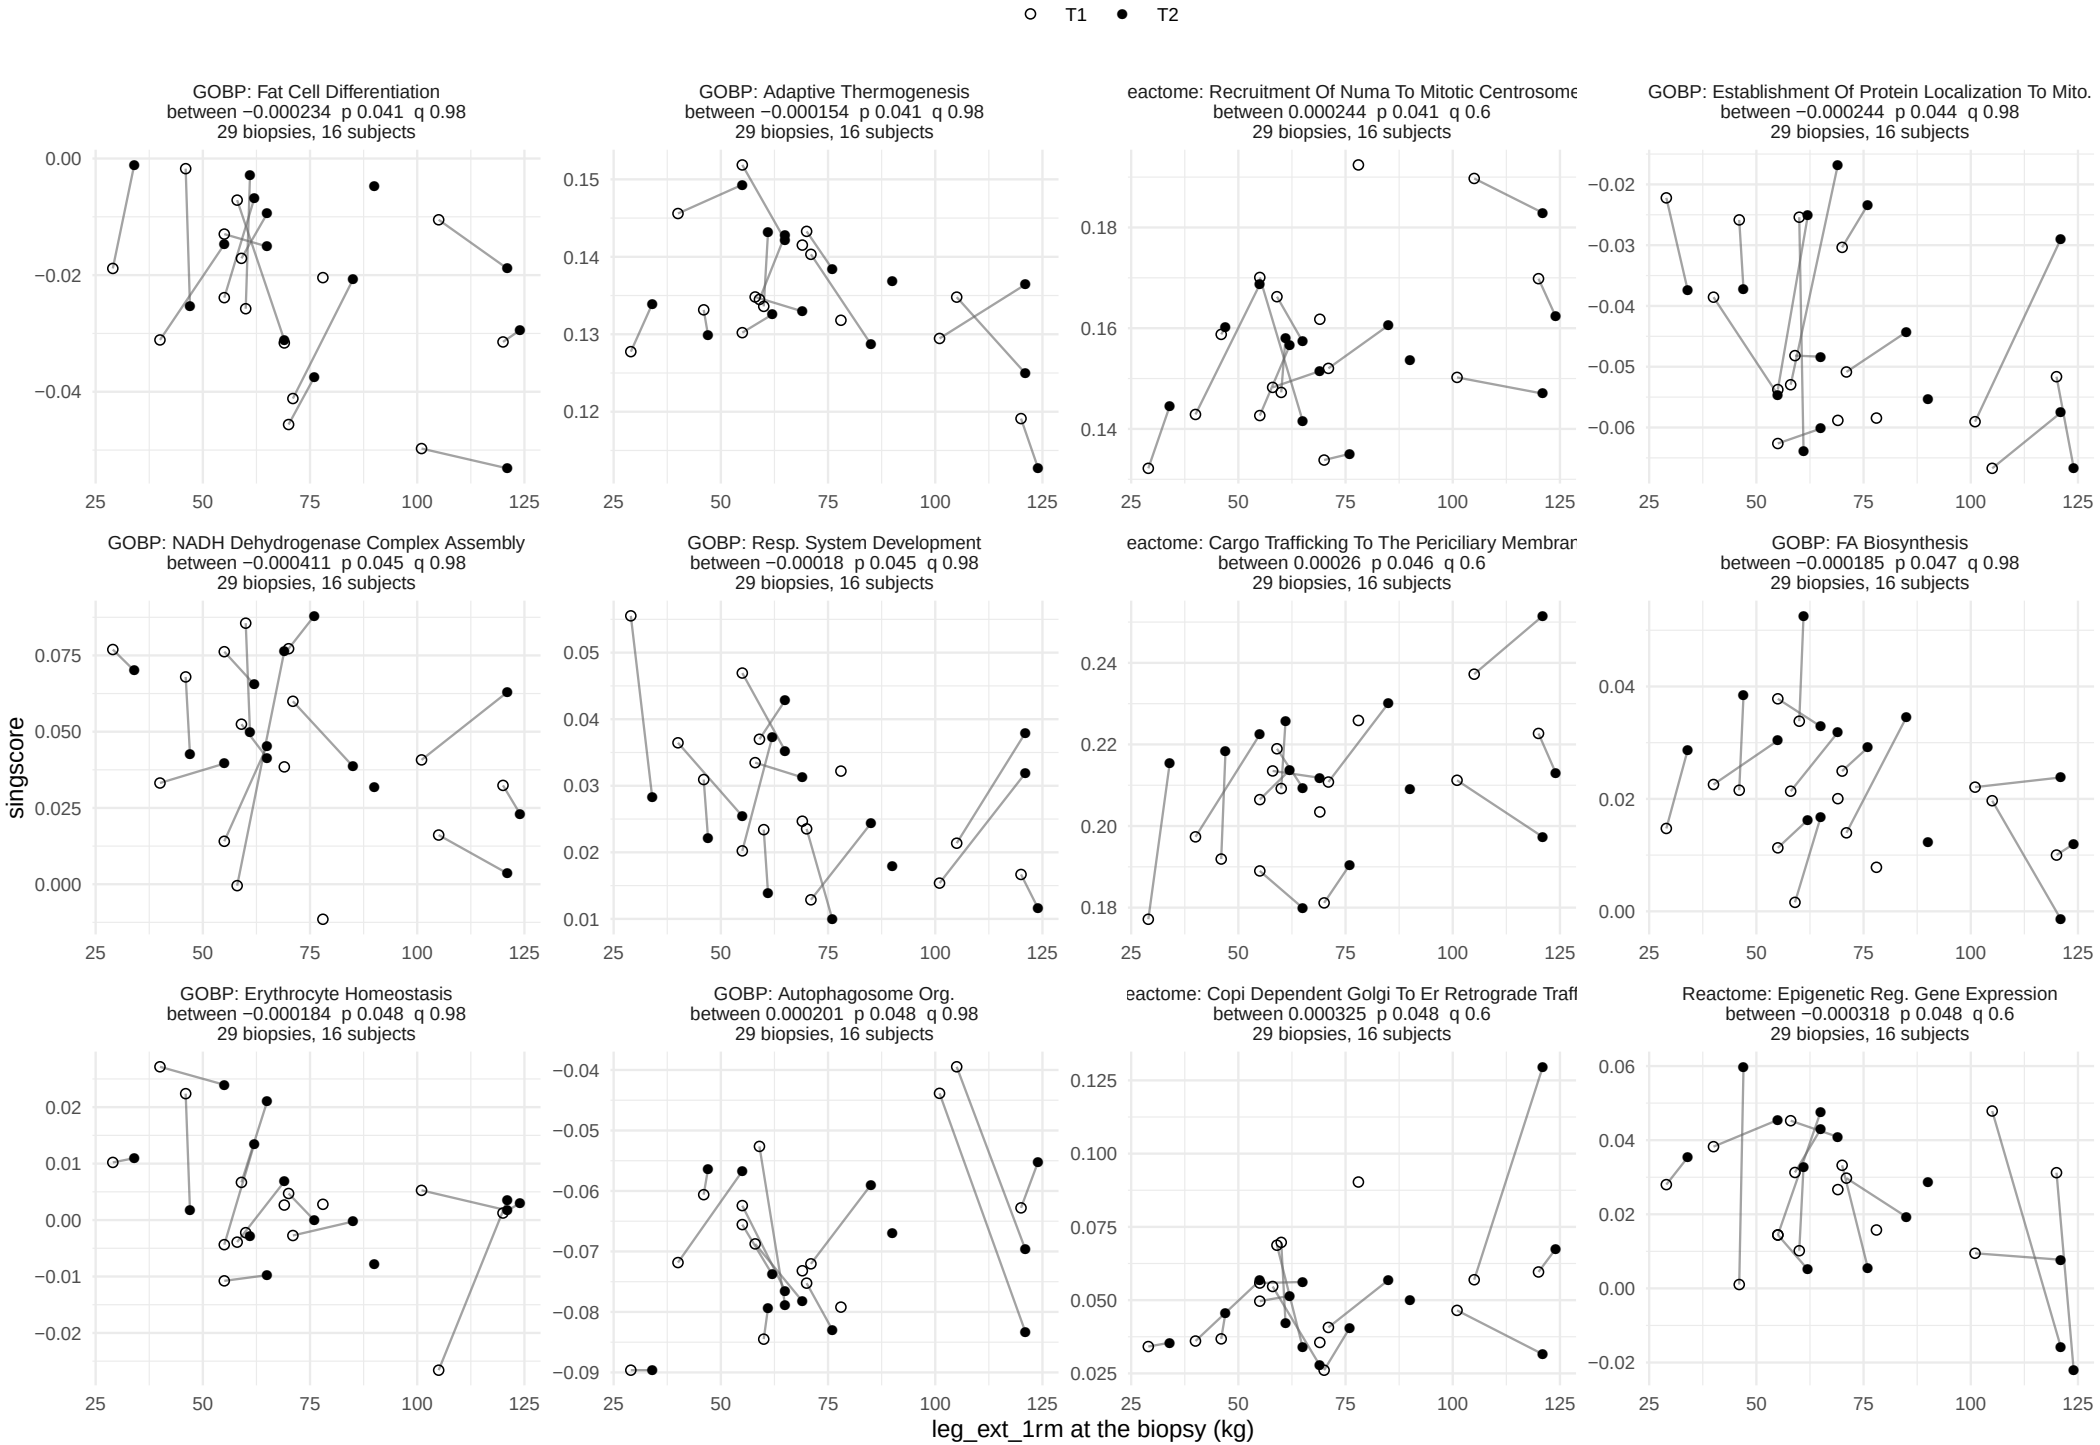

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/02_sets.xlsx, model.


leg_ext_1rm, between−person term

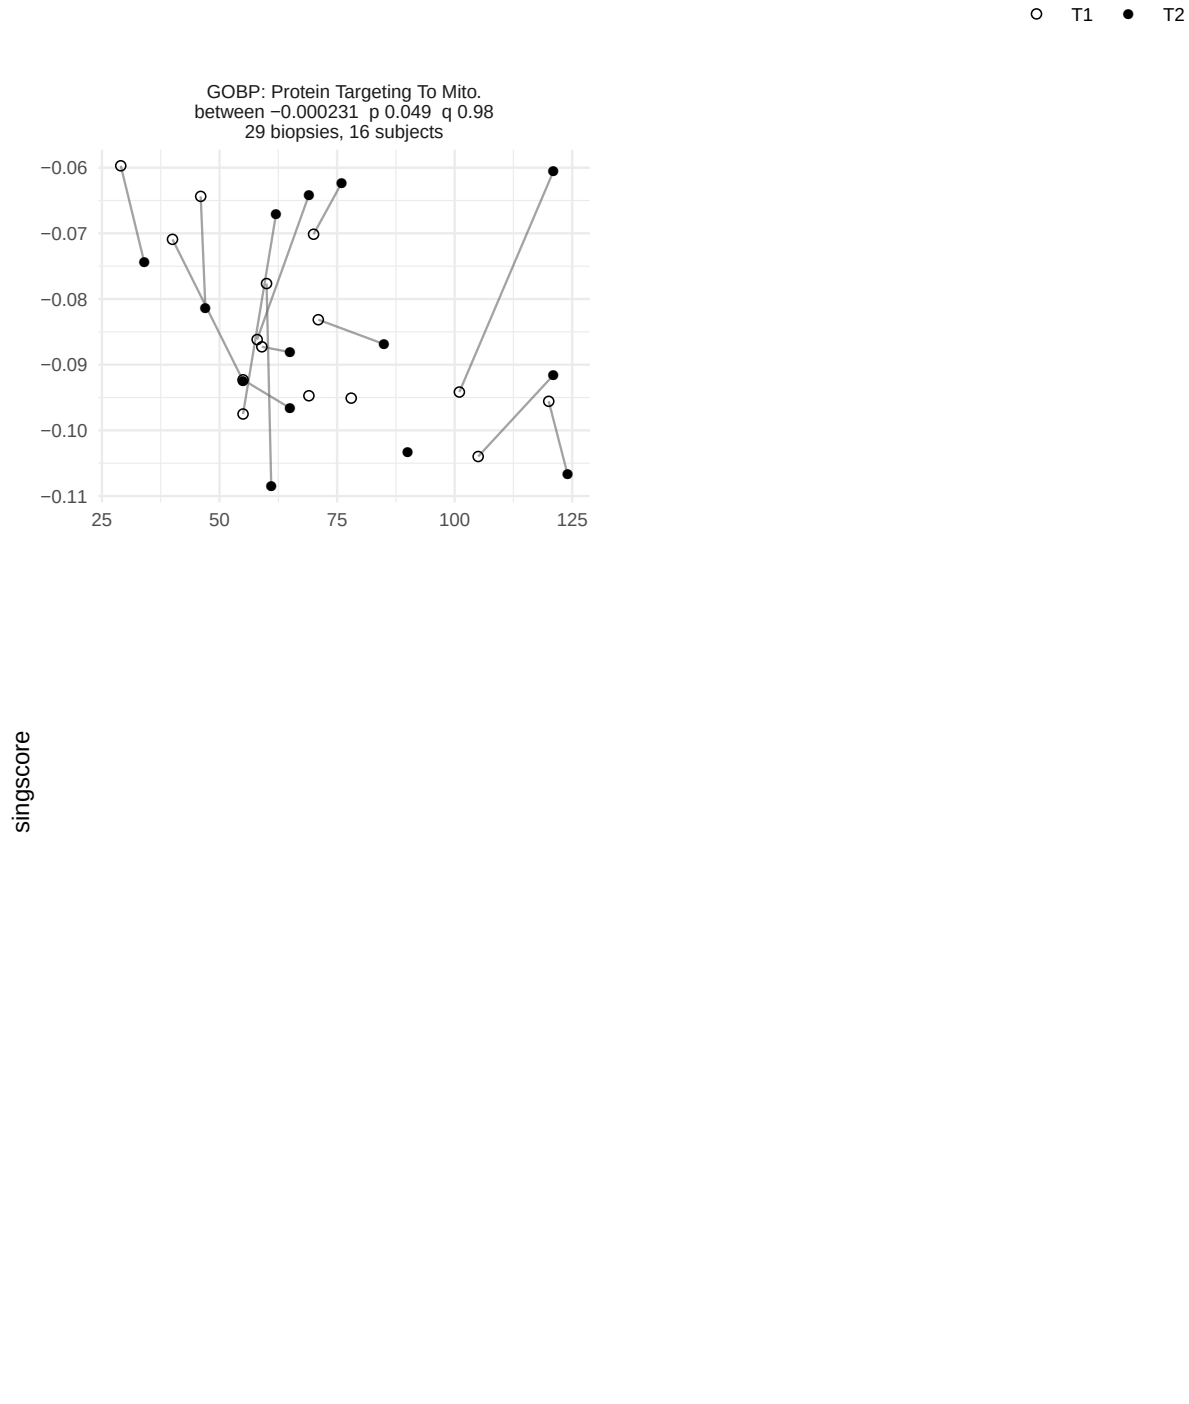

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/02_sets.xlsx, model.

Change score, training window


413 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 1 of 35.

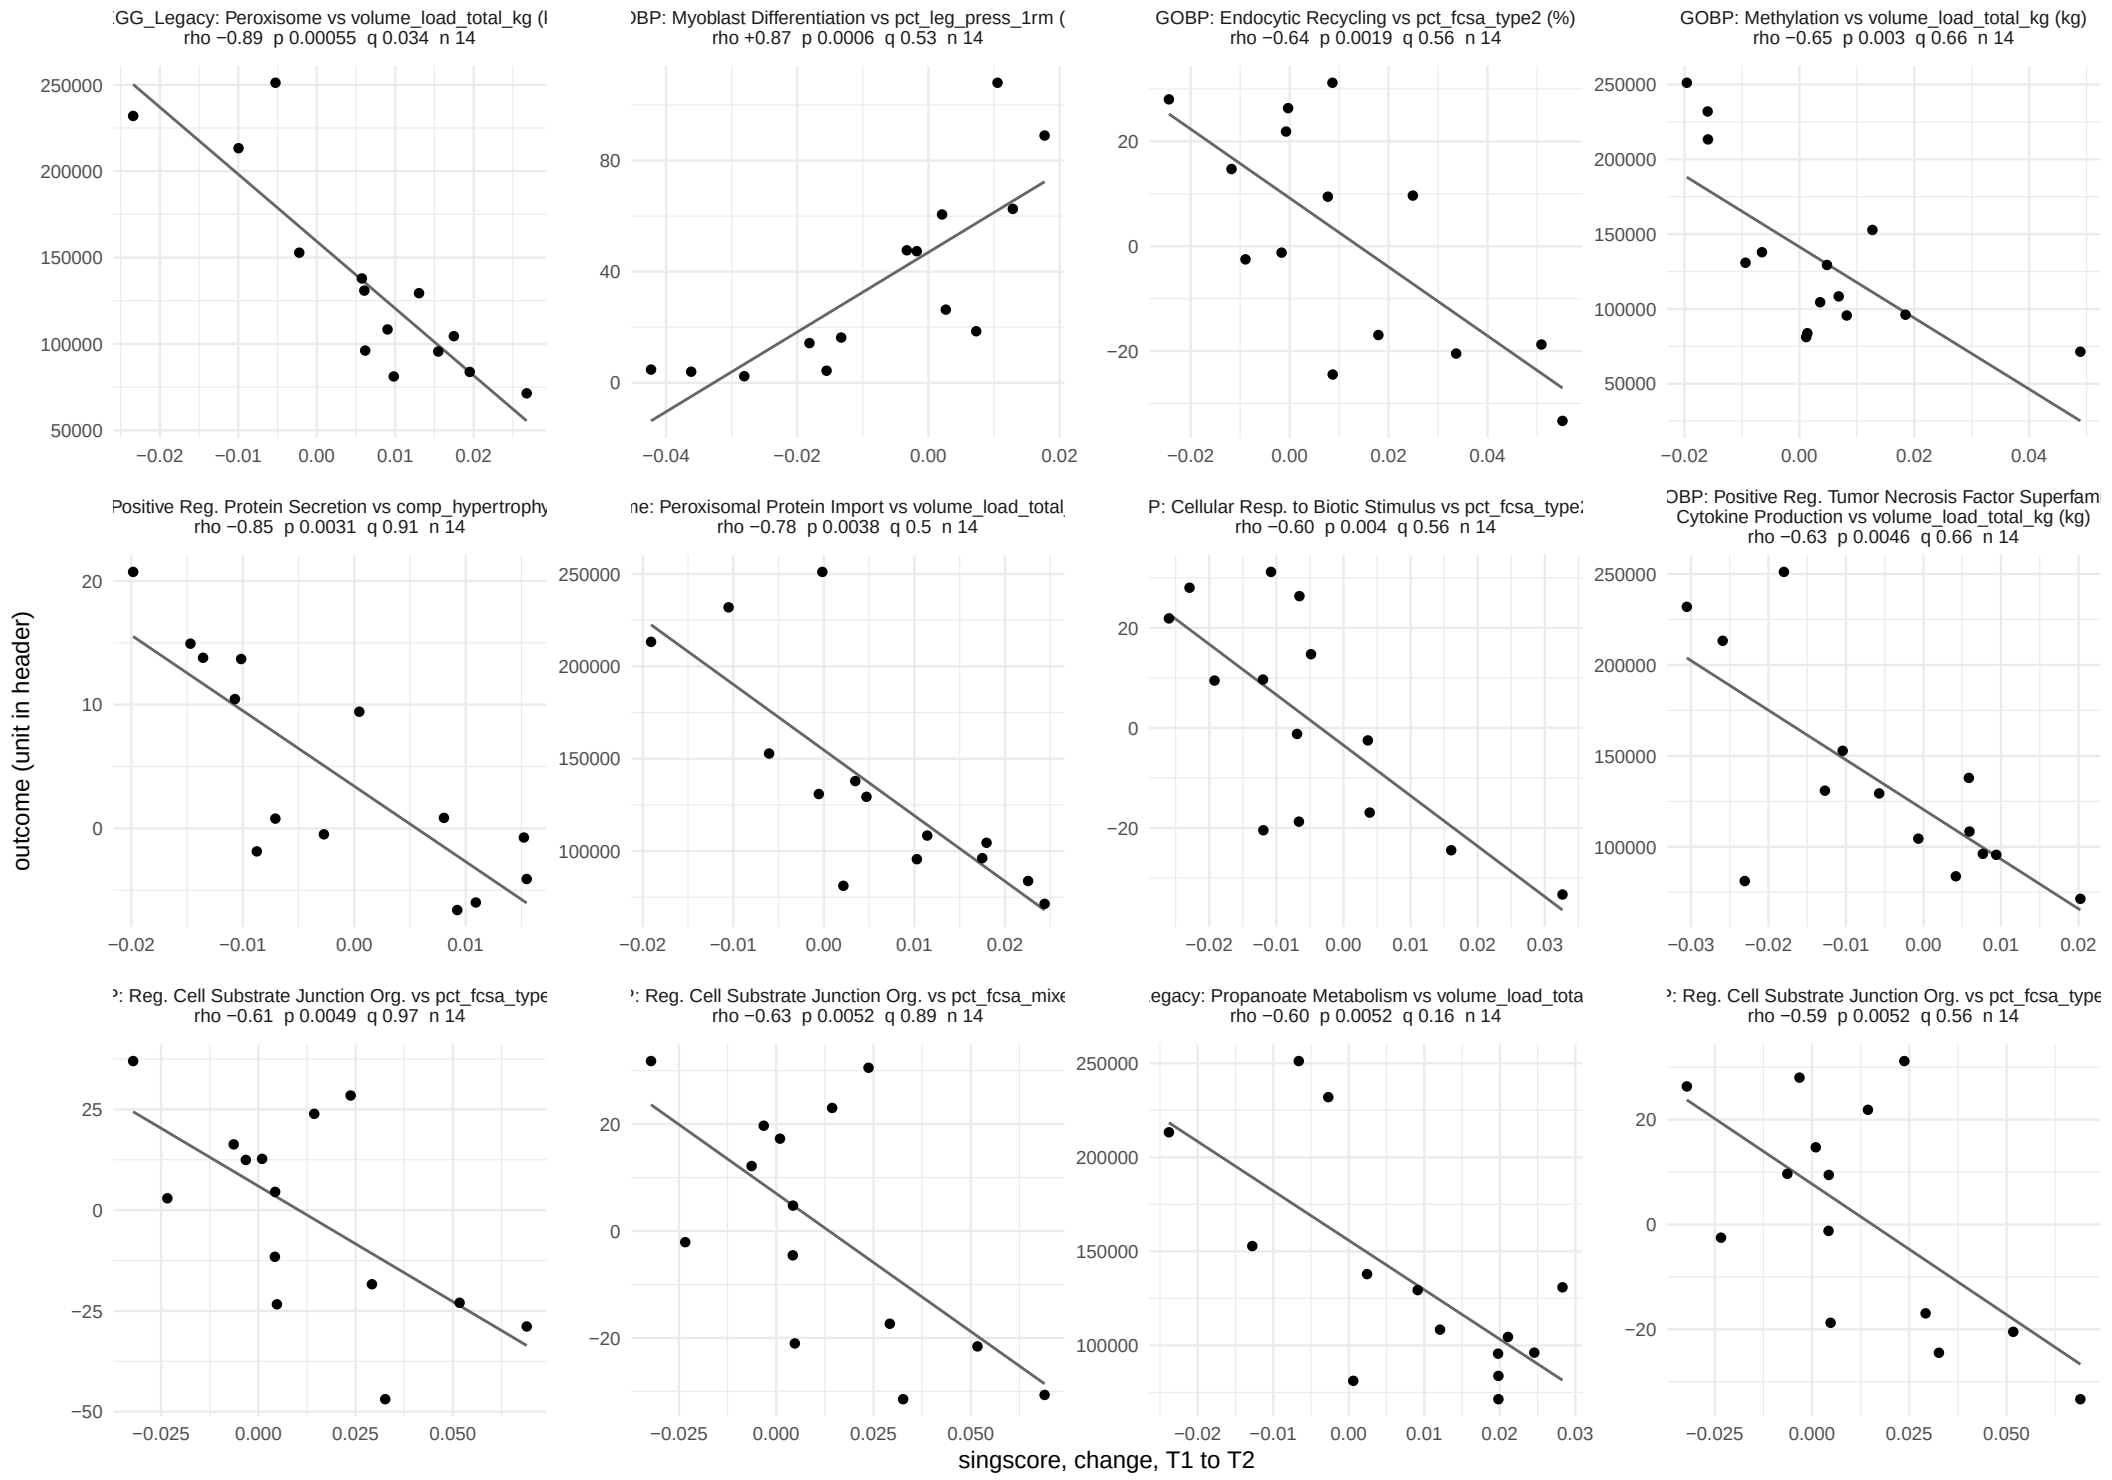

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, training window


413 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 2 of 35.

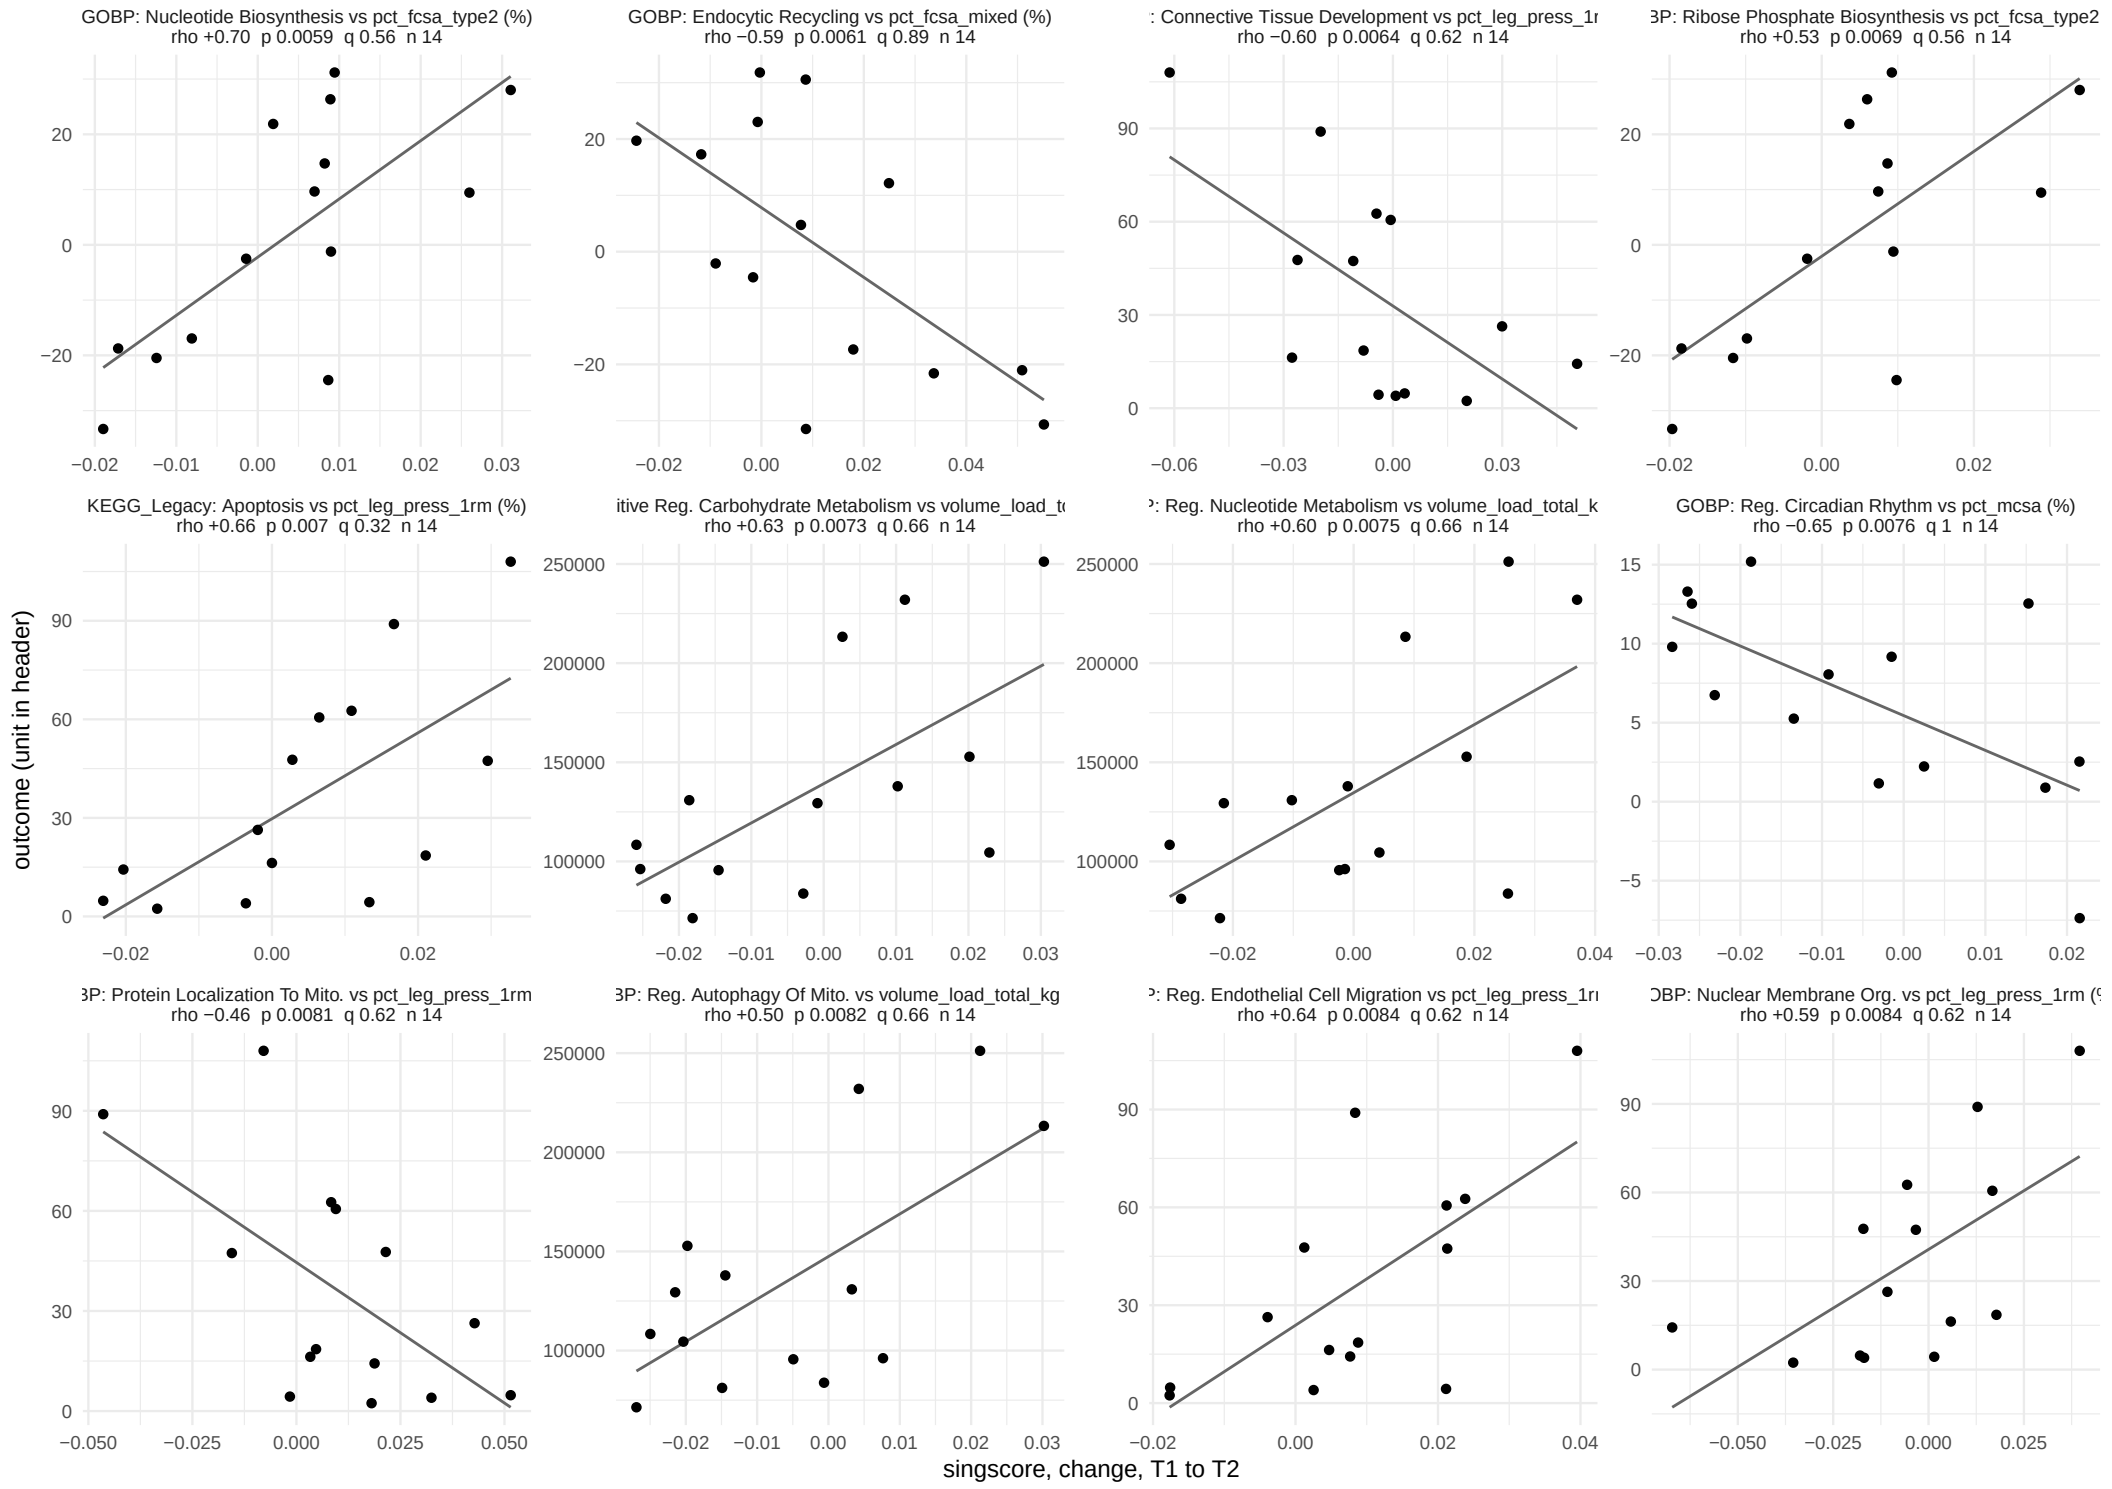

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, training window


413 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 3 of 35.

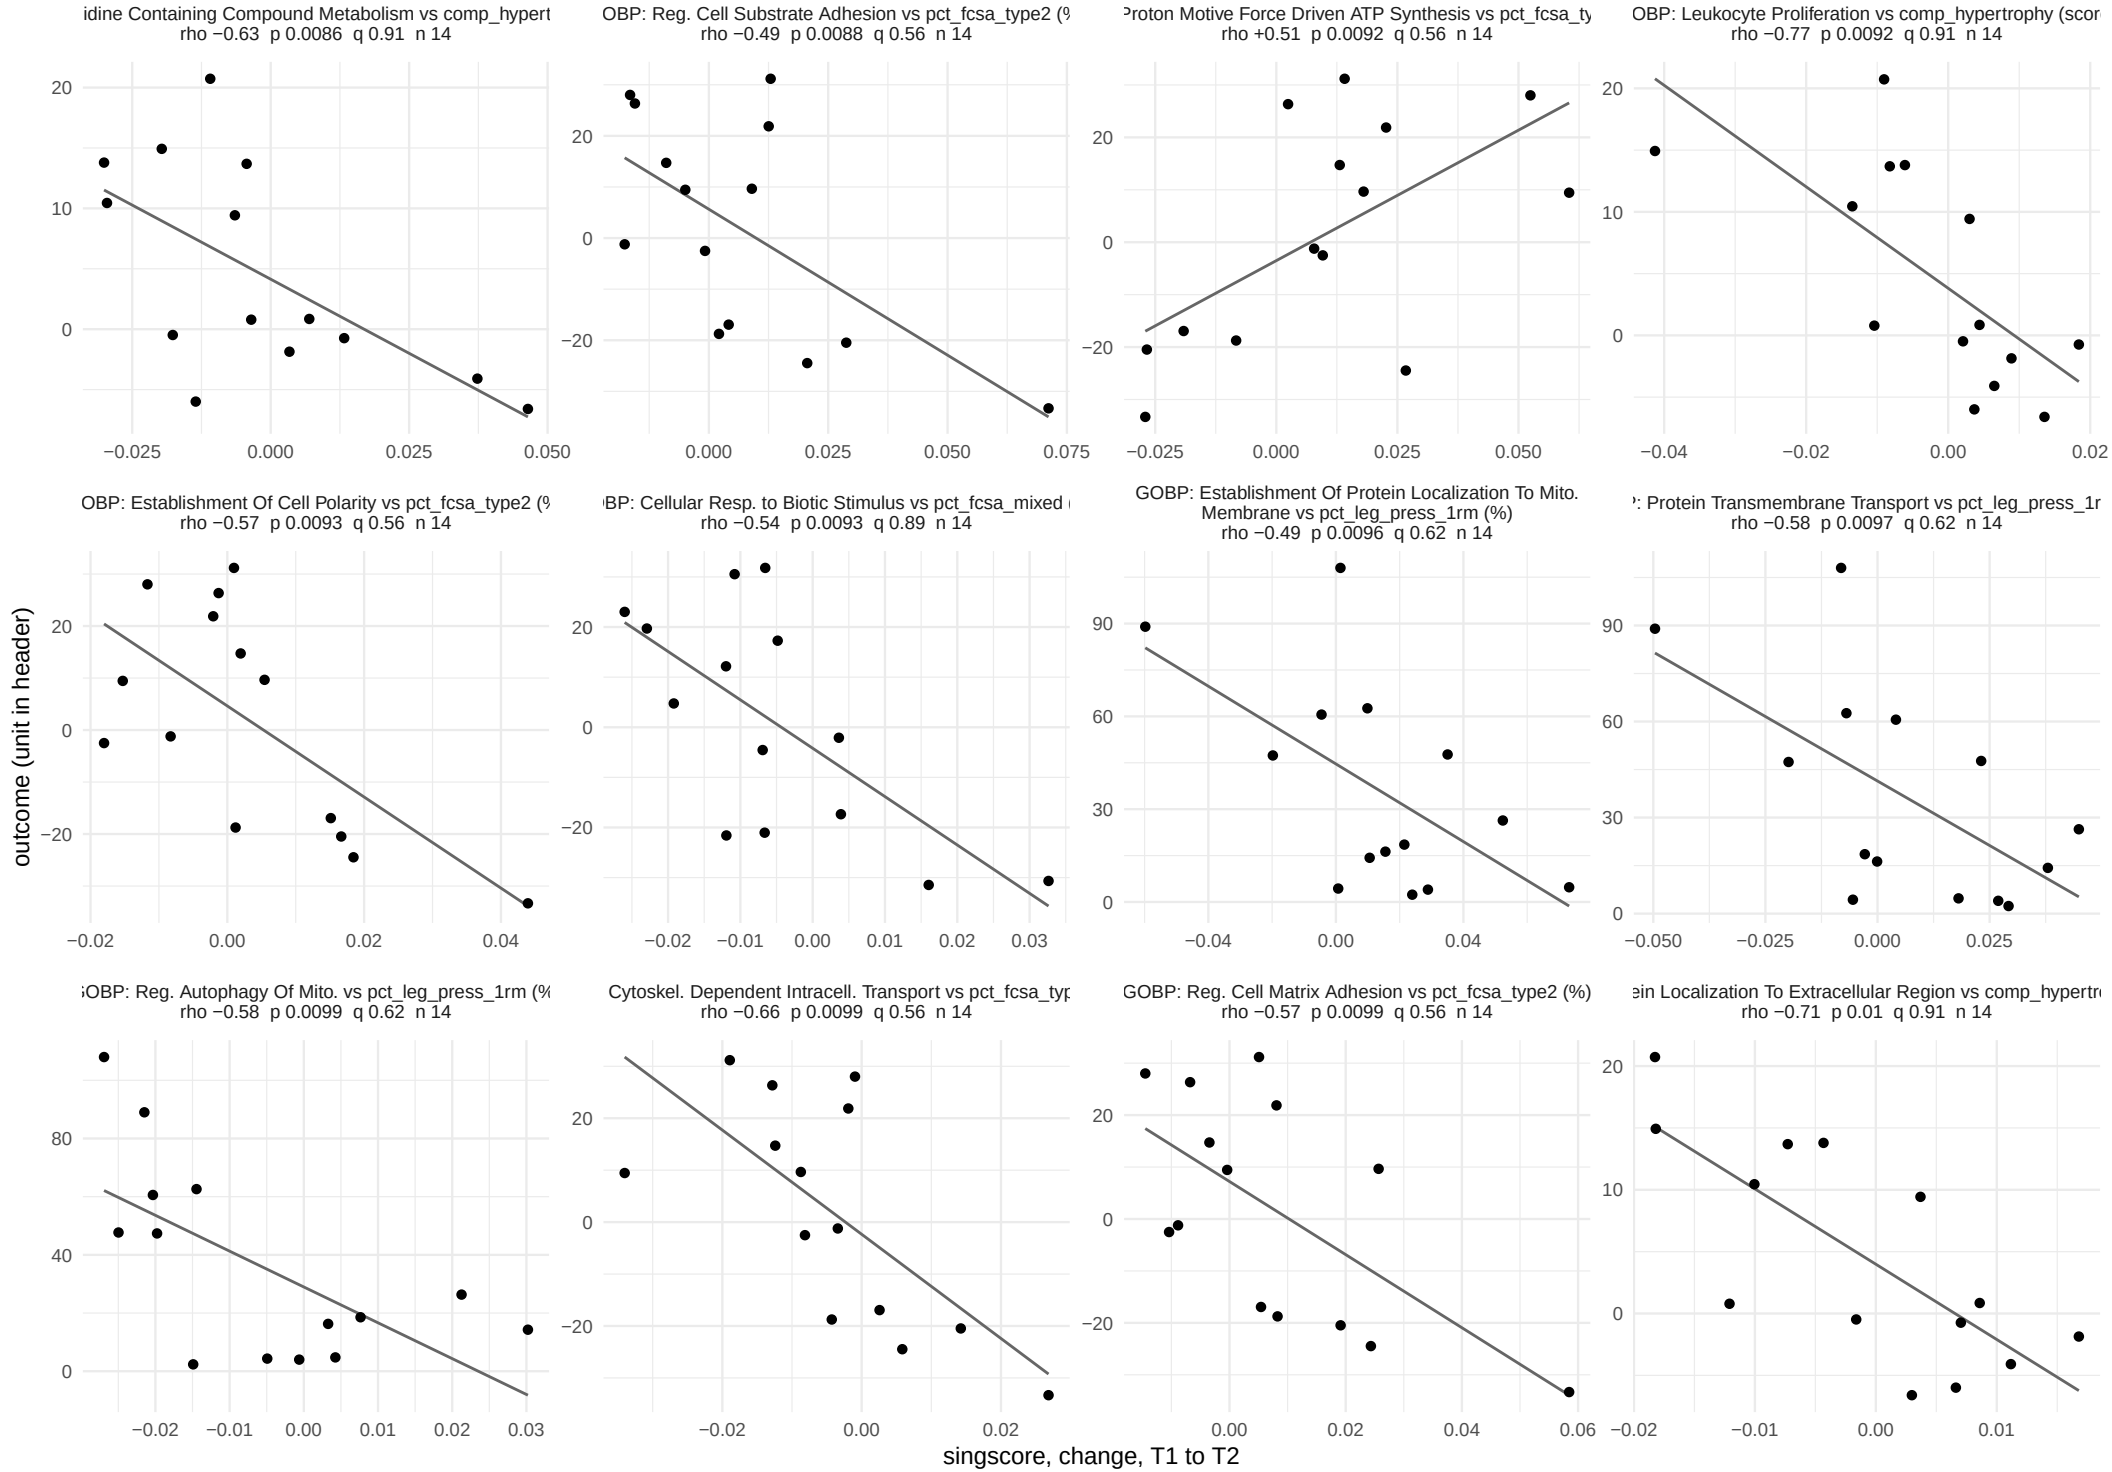

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, training window


413 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 4 of 35.

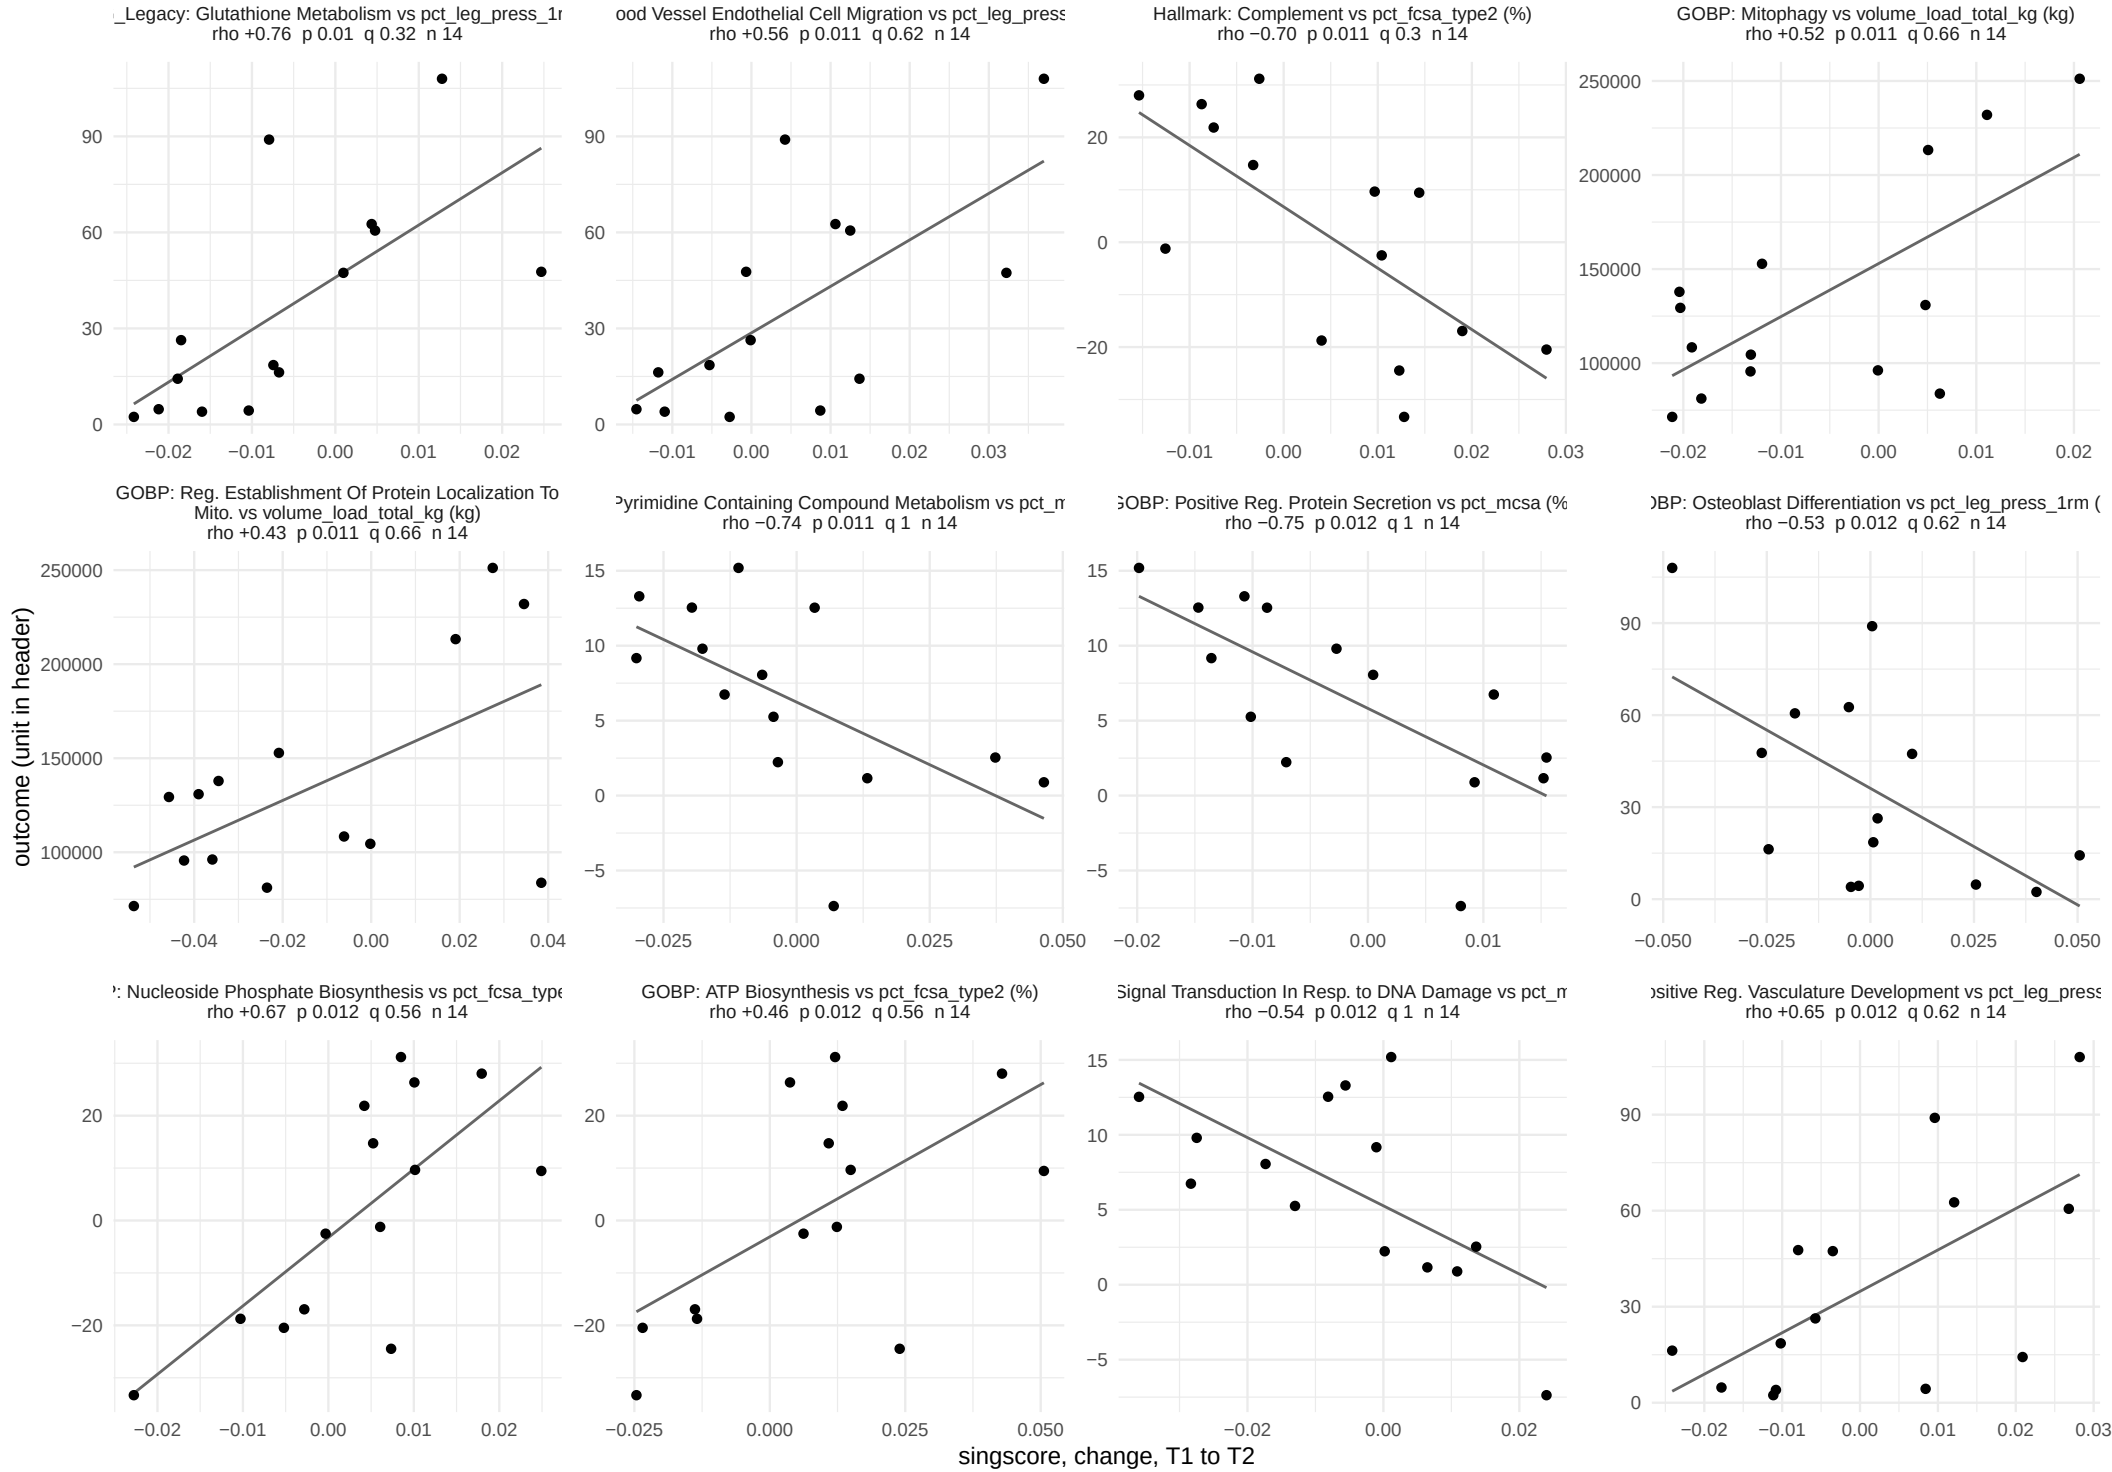

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, training window


413 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 5 of 35.

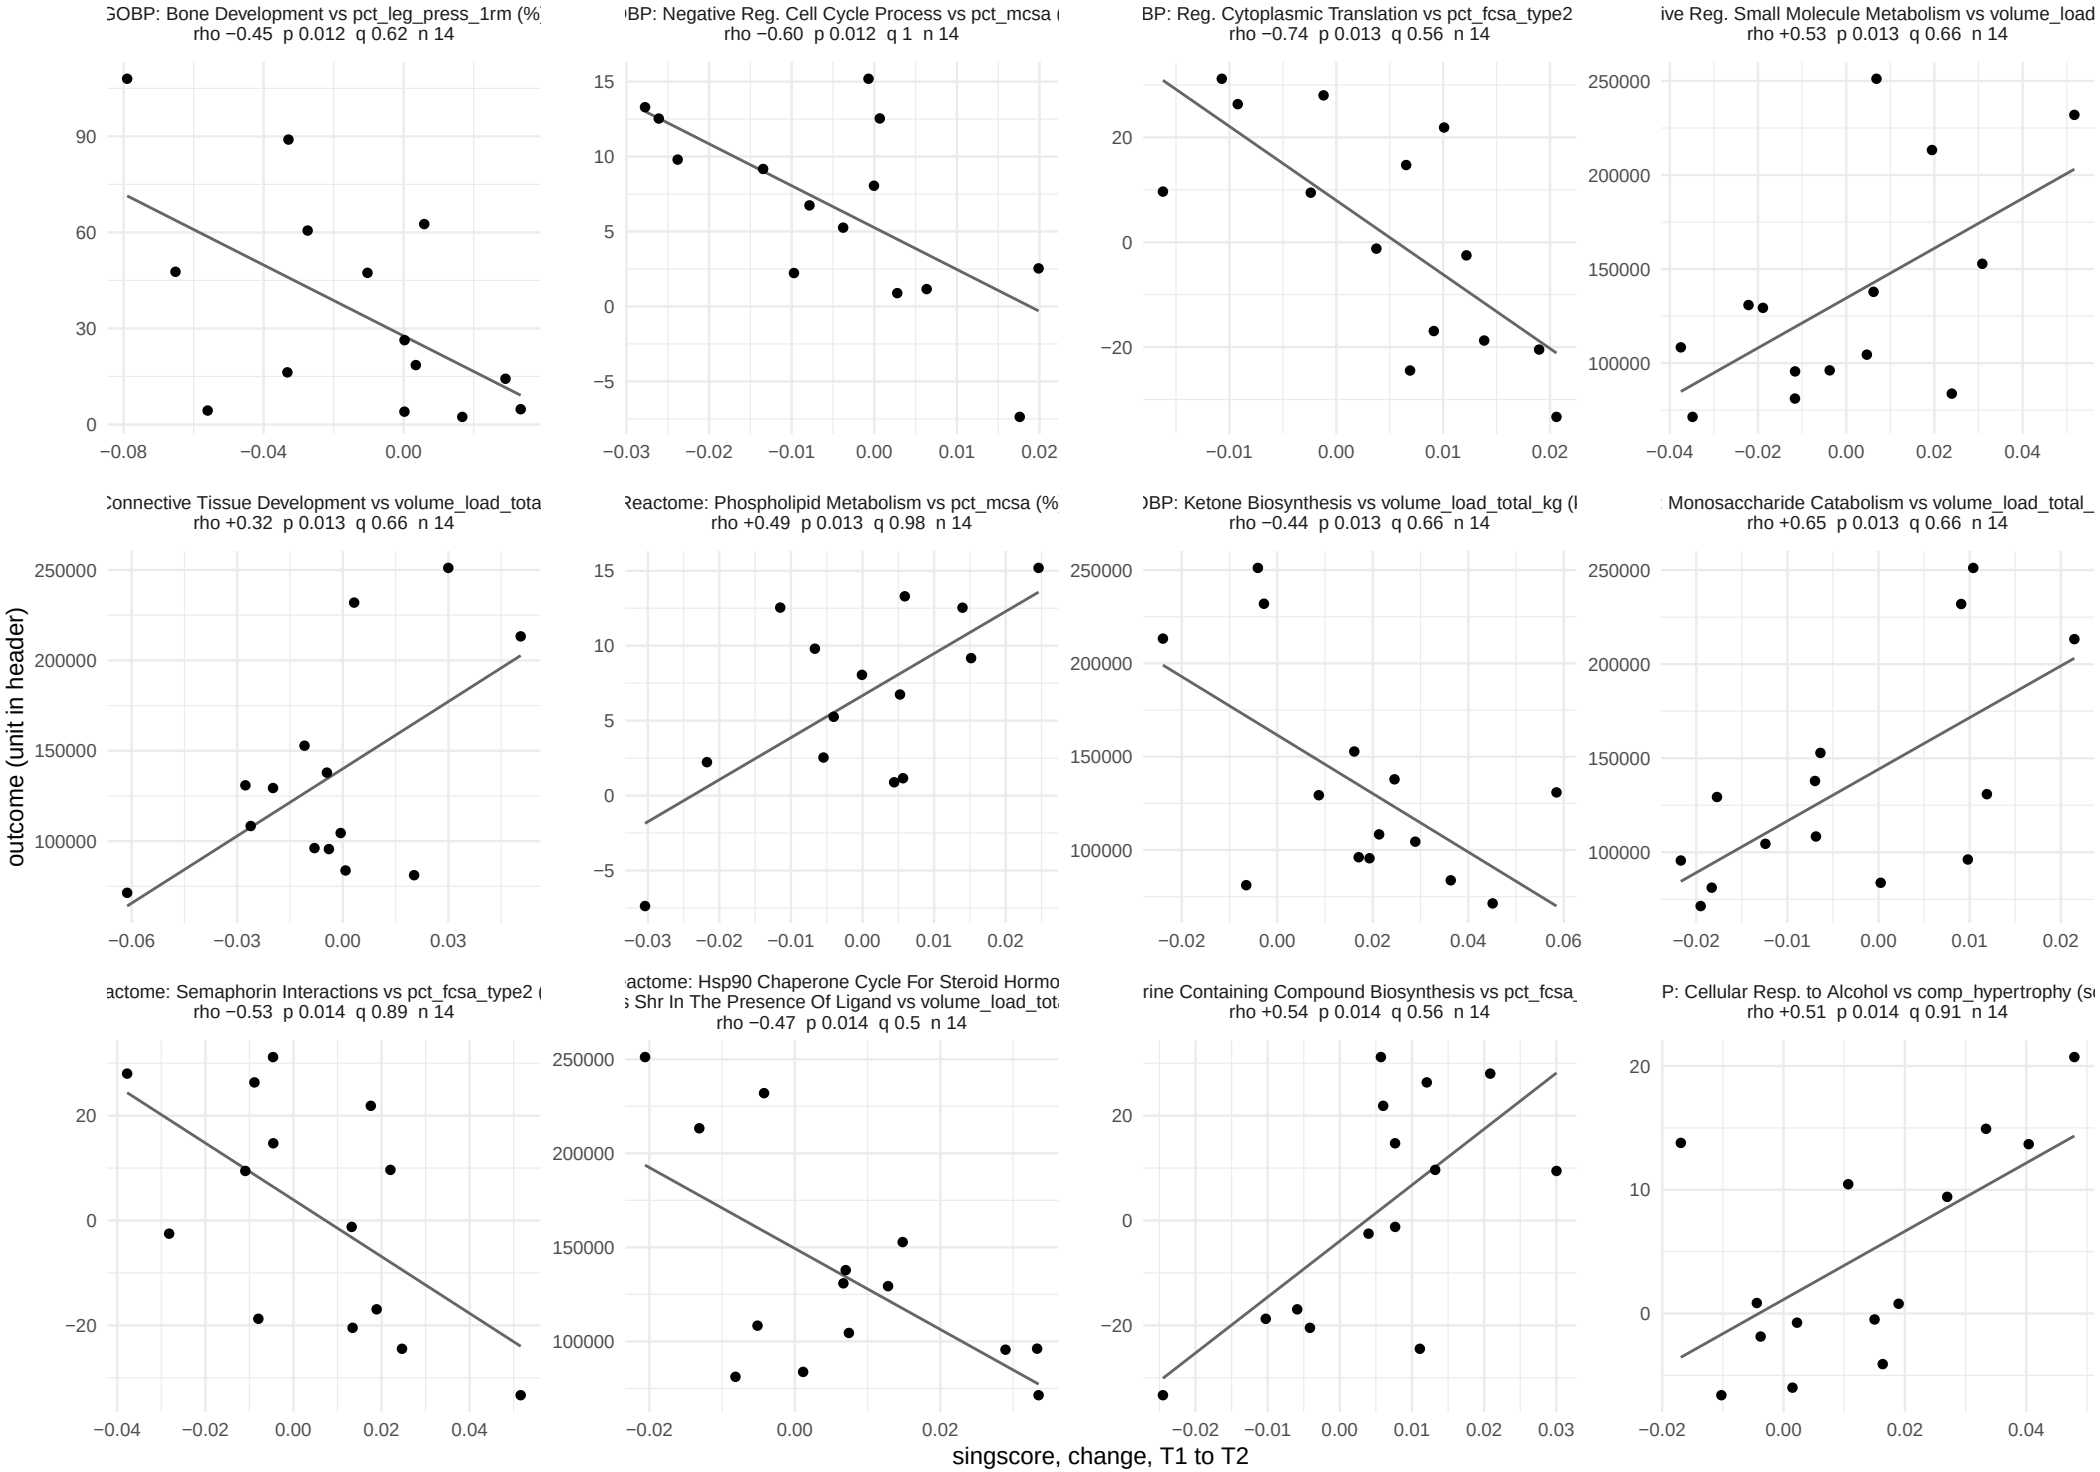

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, training window


413 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 6 of 35.

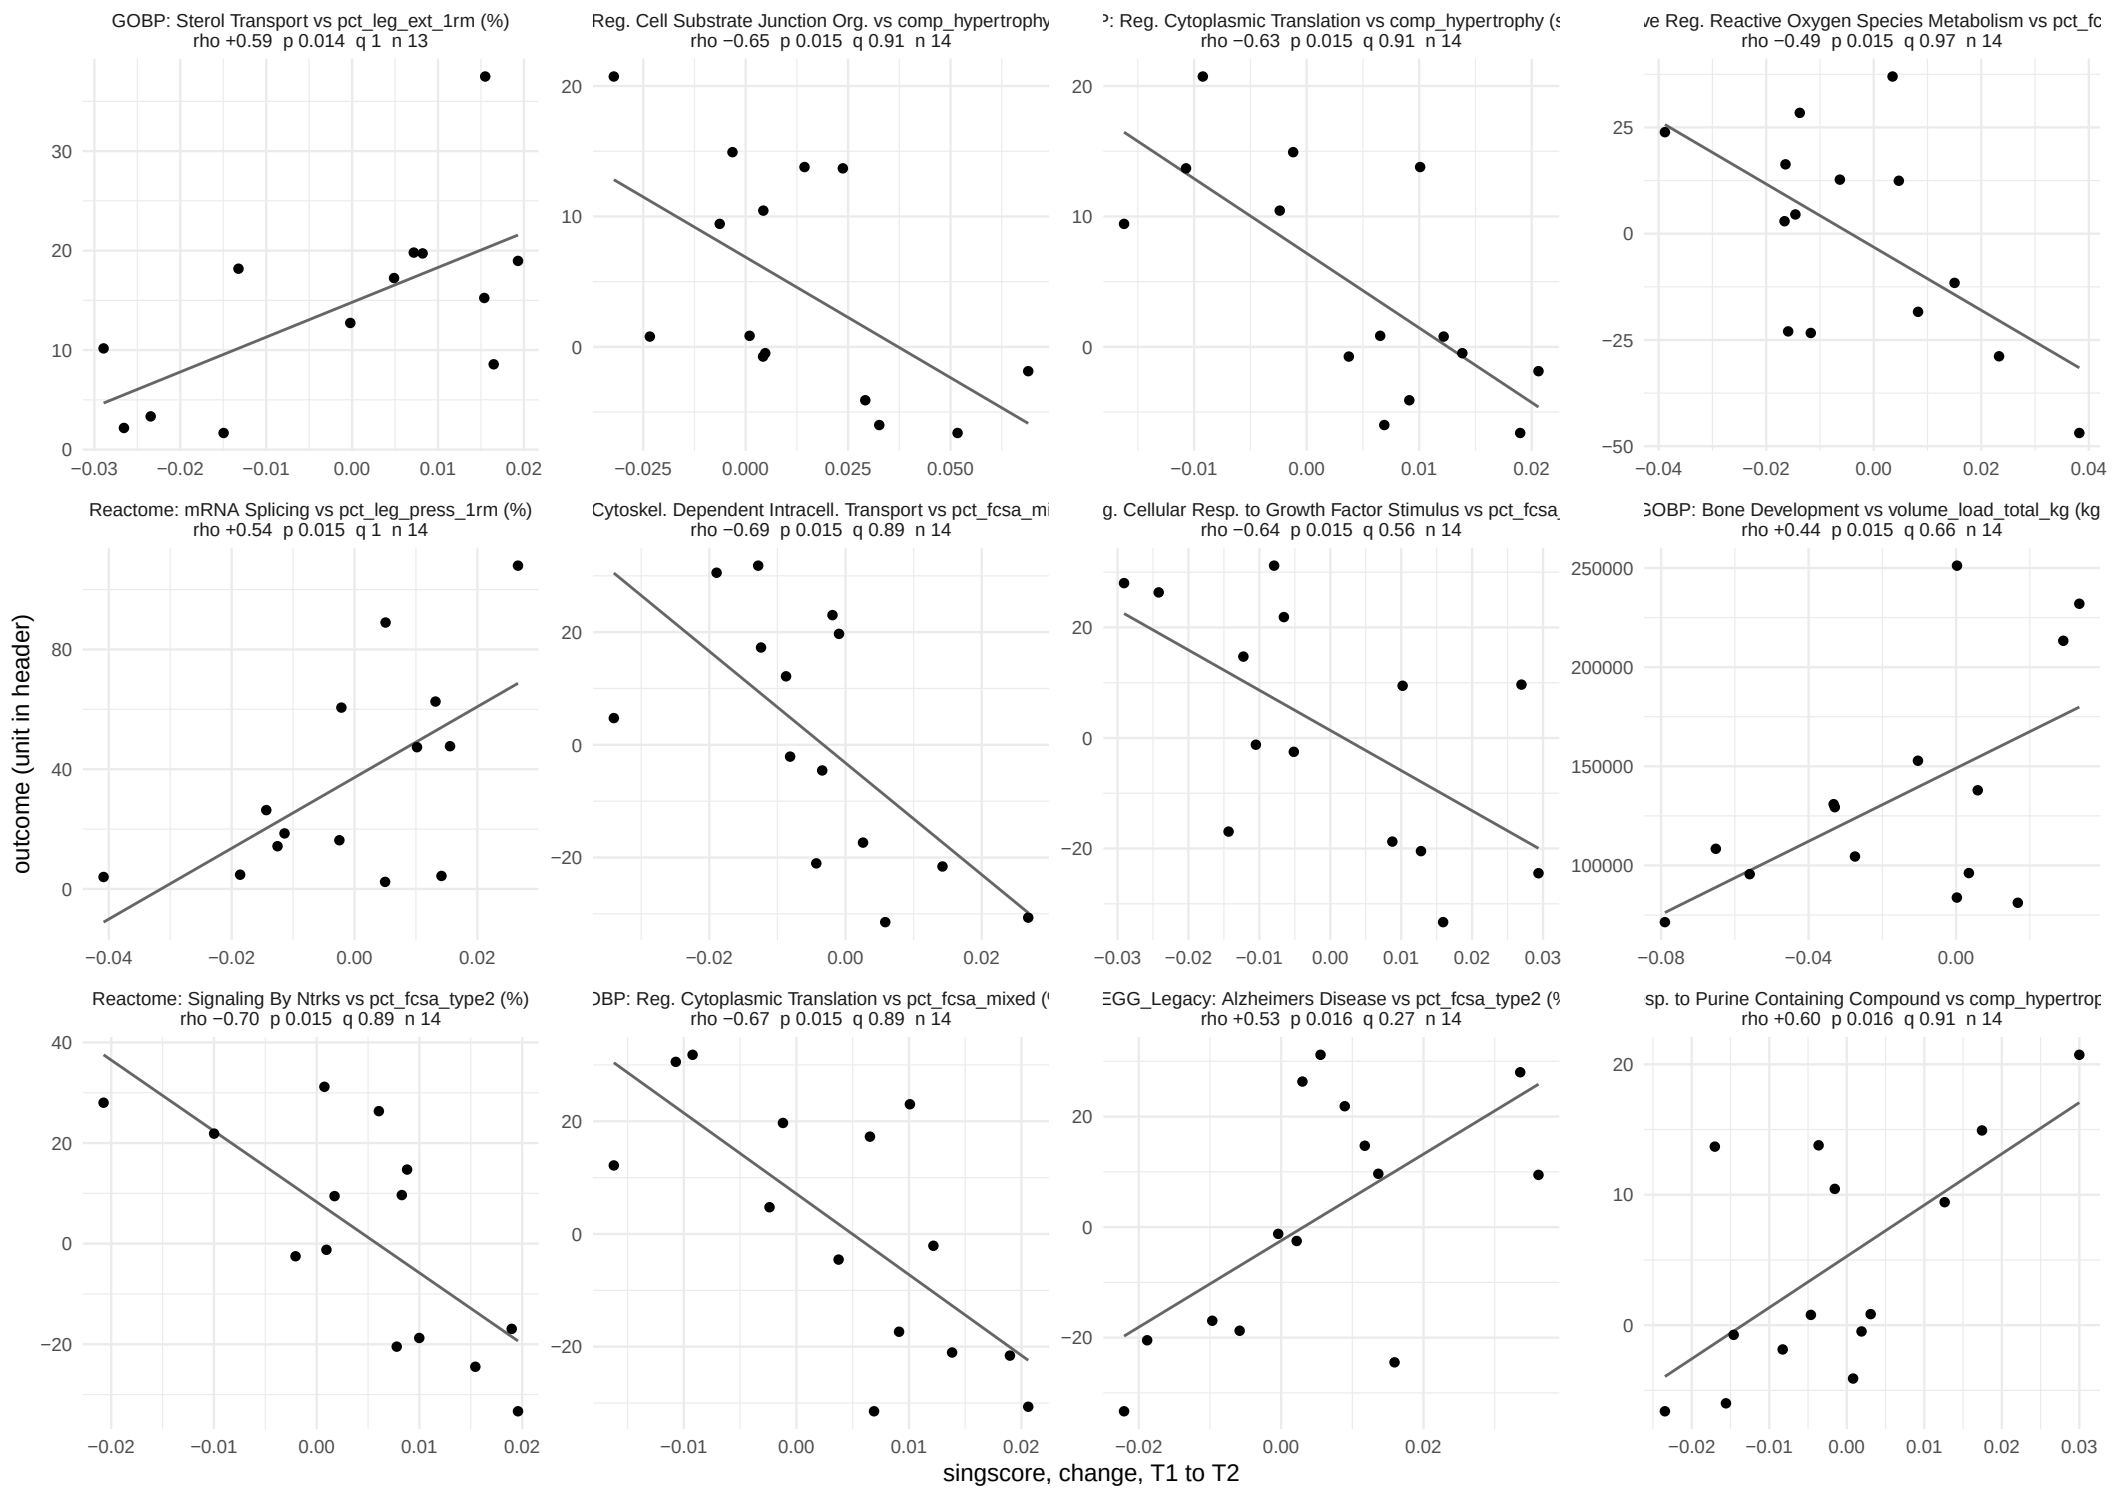

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, training window


413 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 7 of 35.

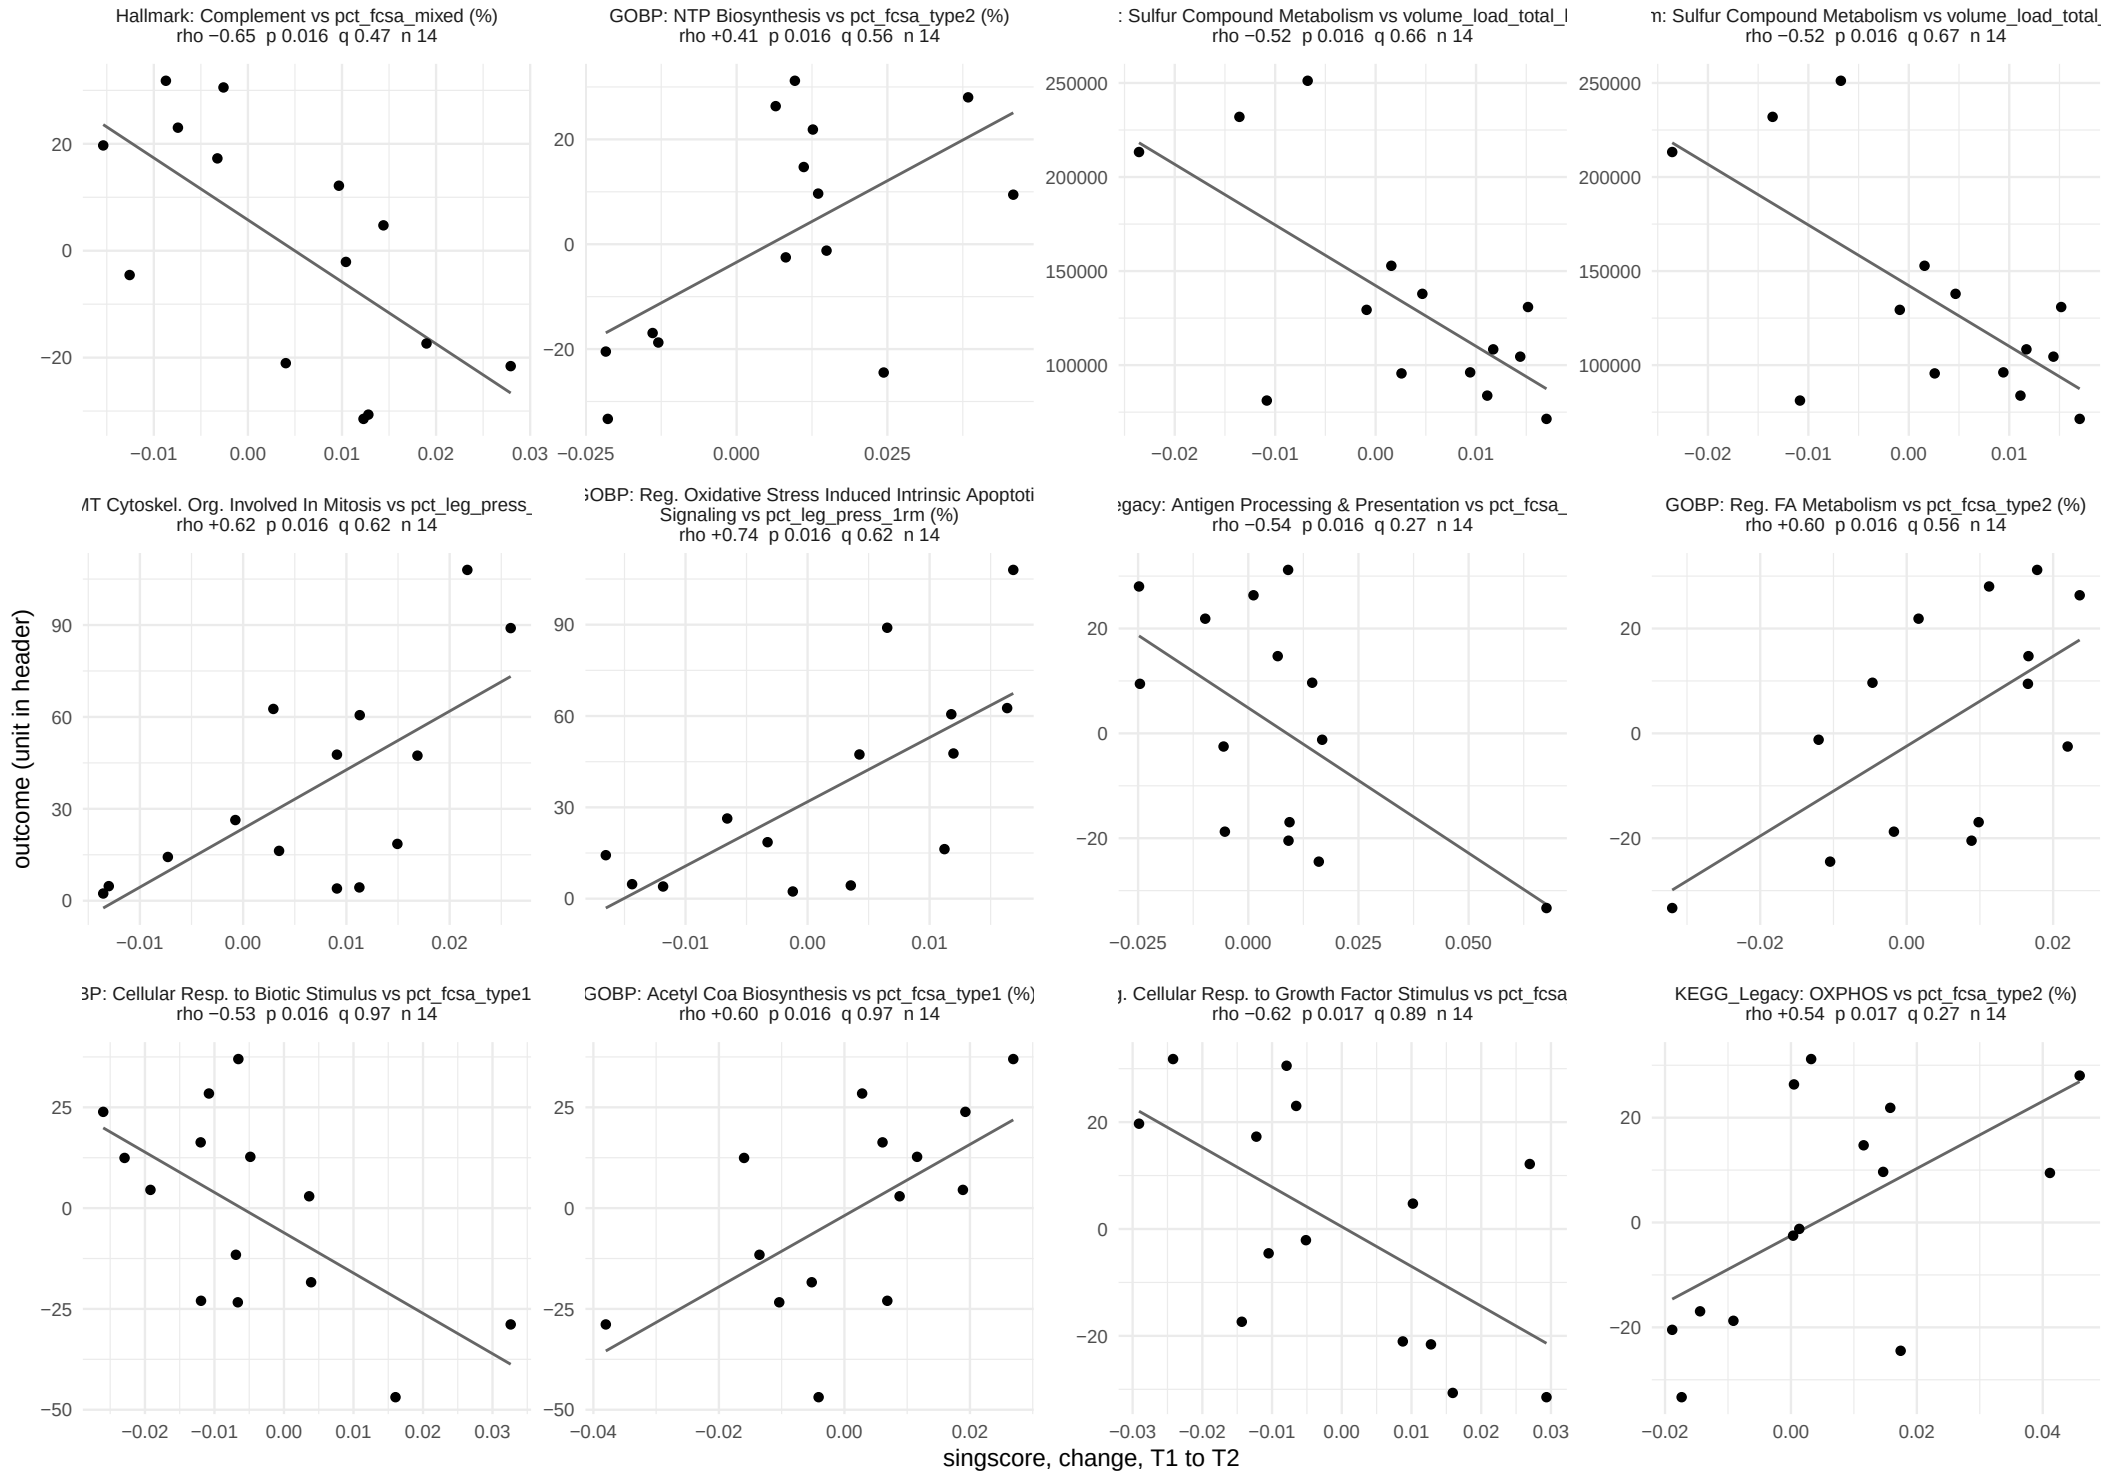

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, training window


413 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 8 of 35.

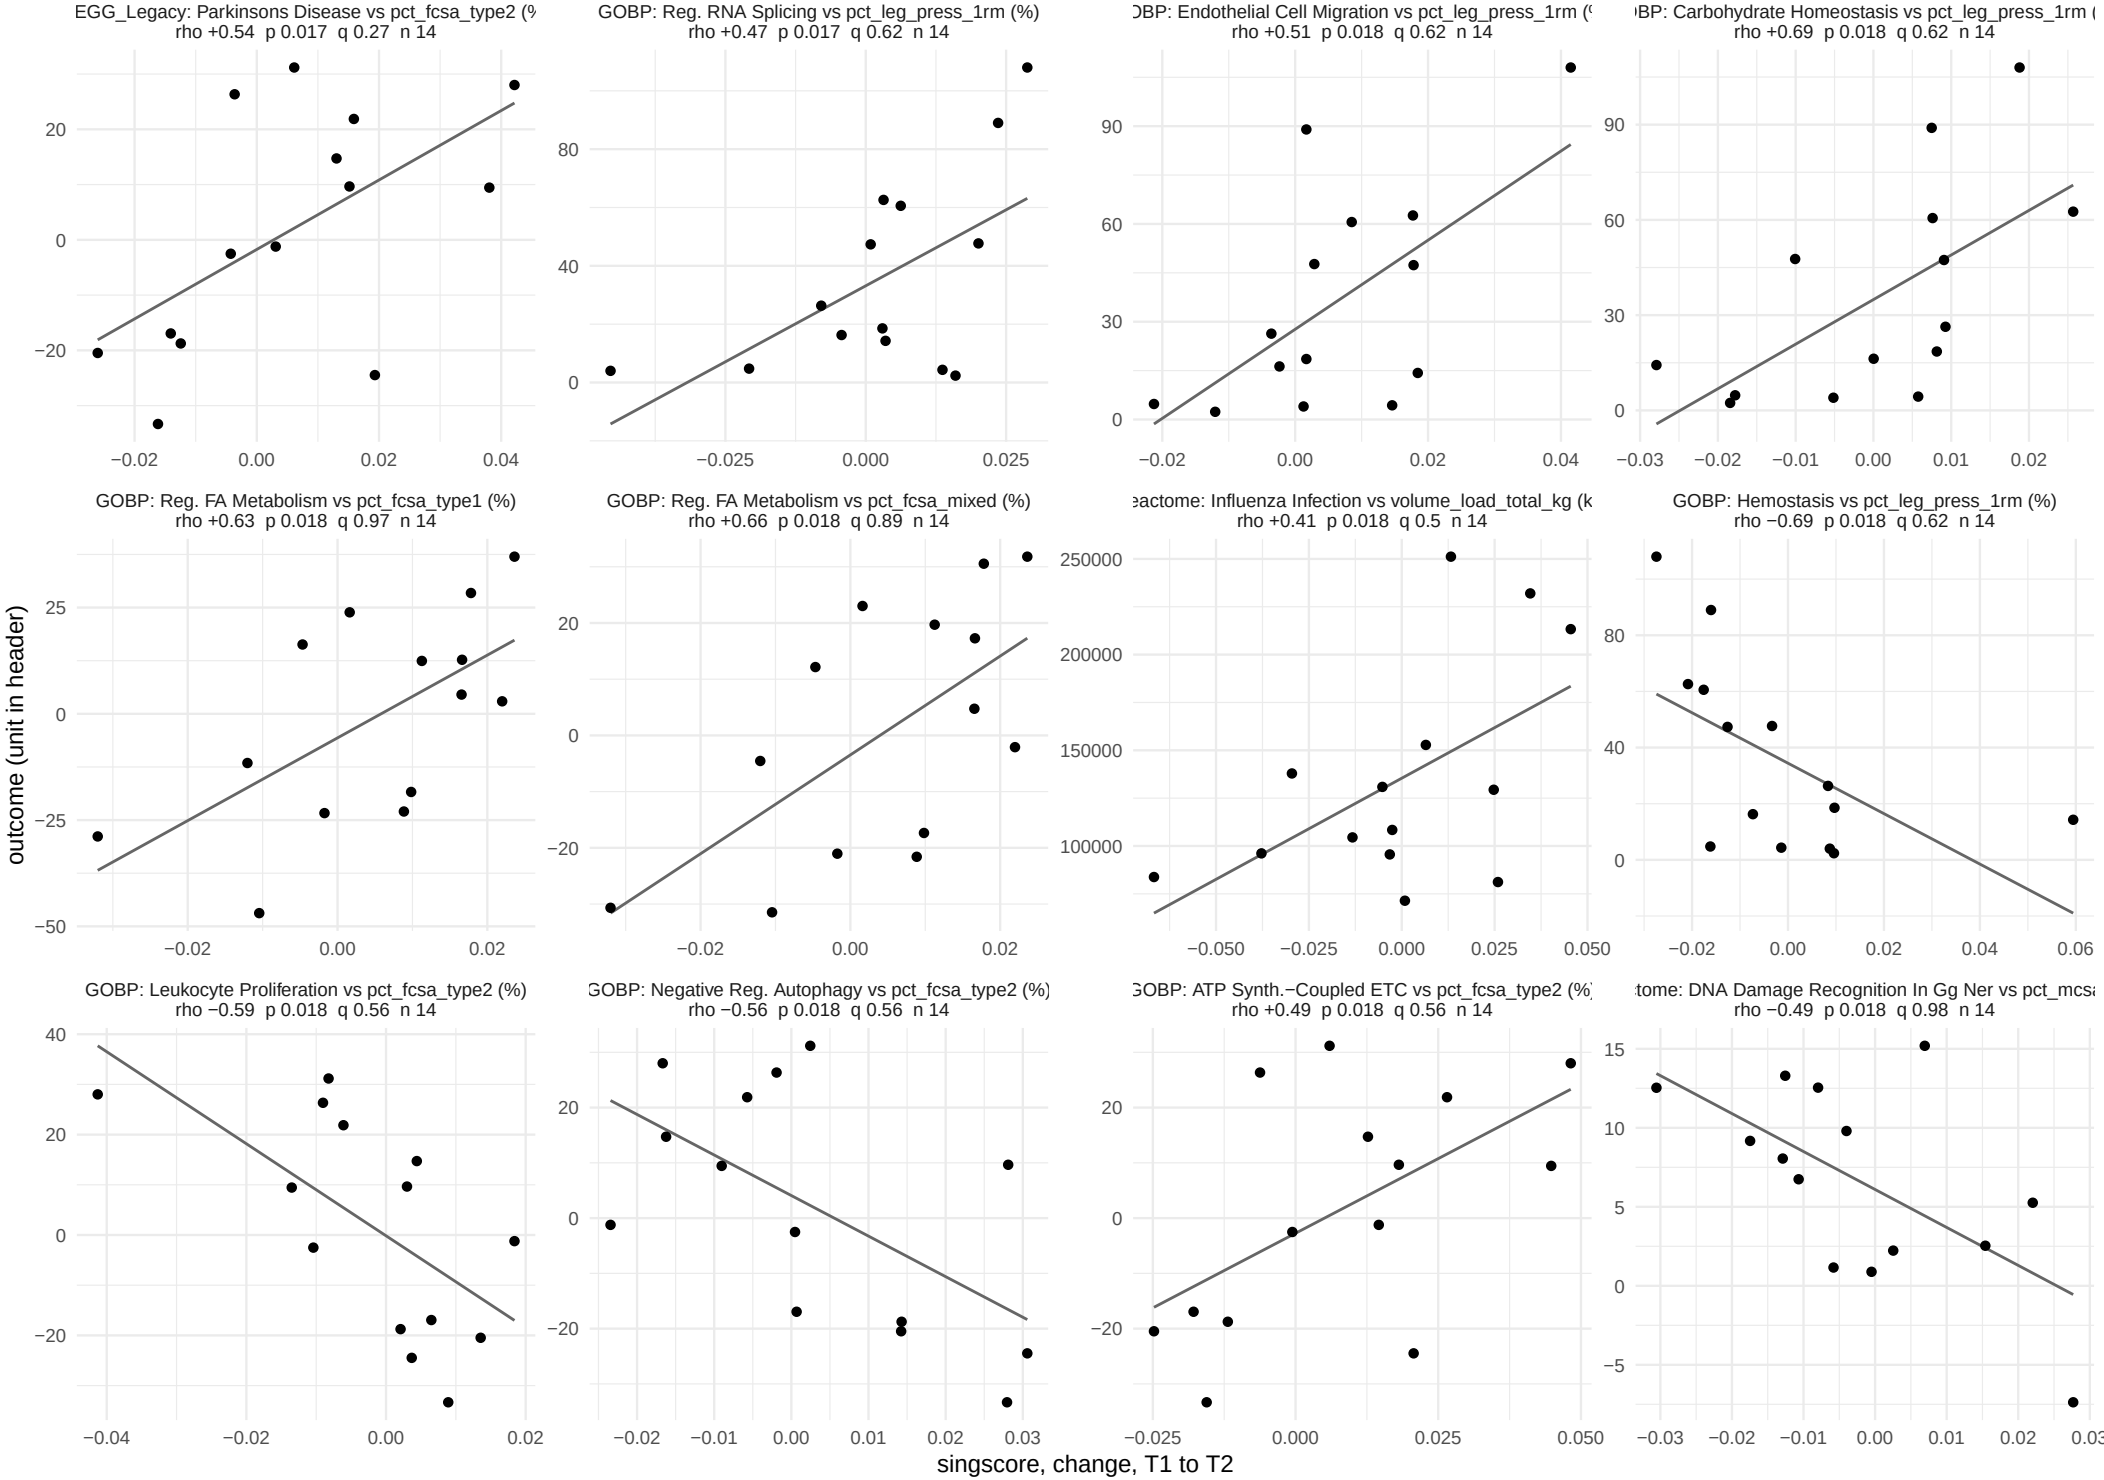

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, training window


413 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 9 of 35.

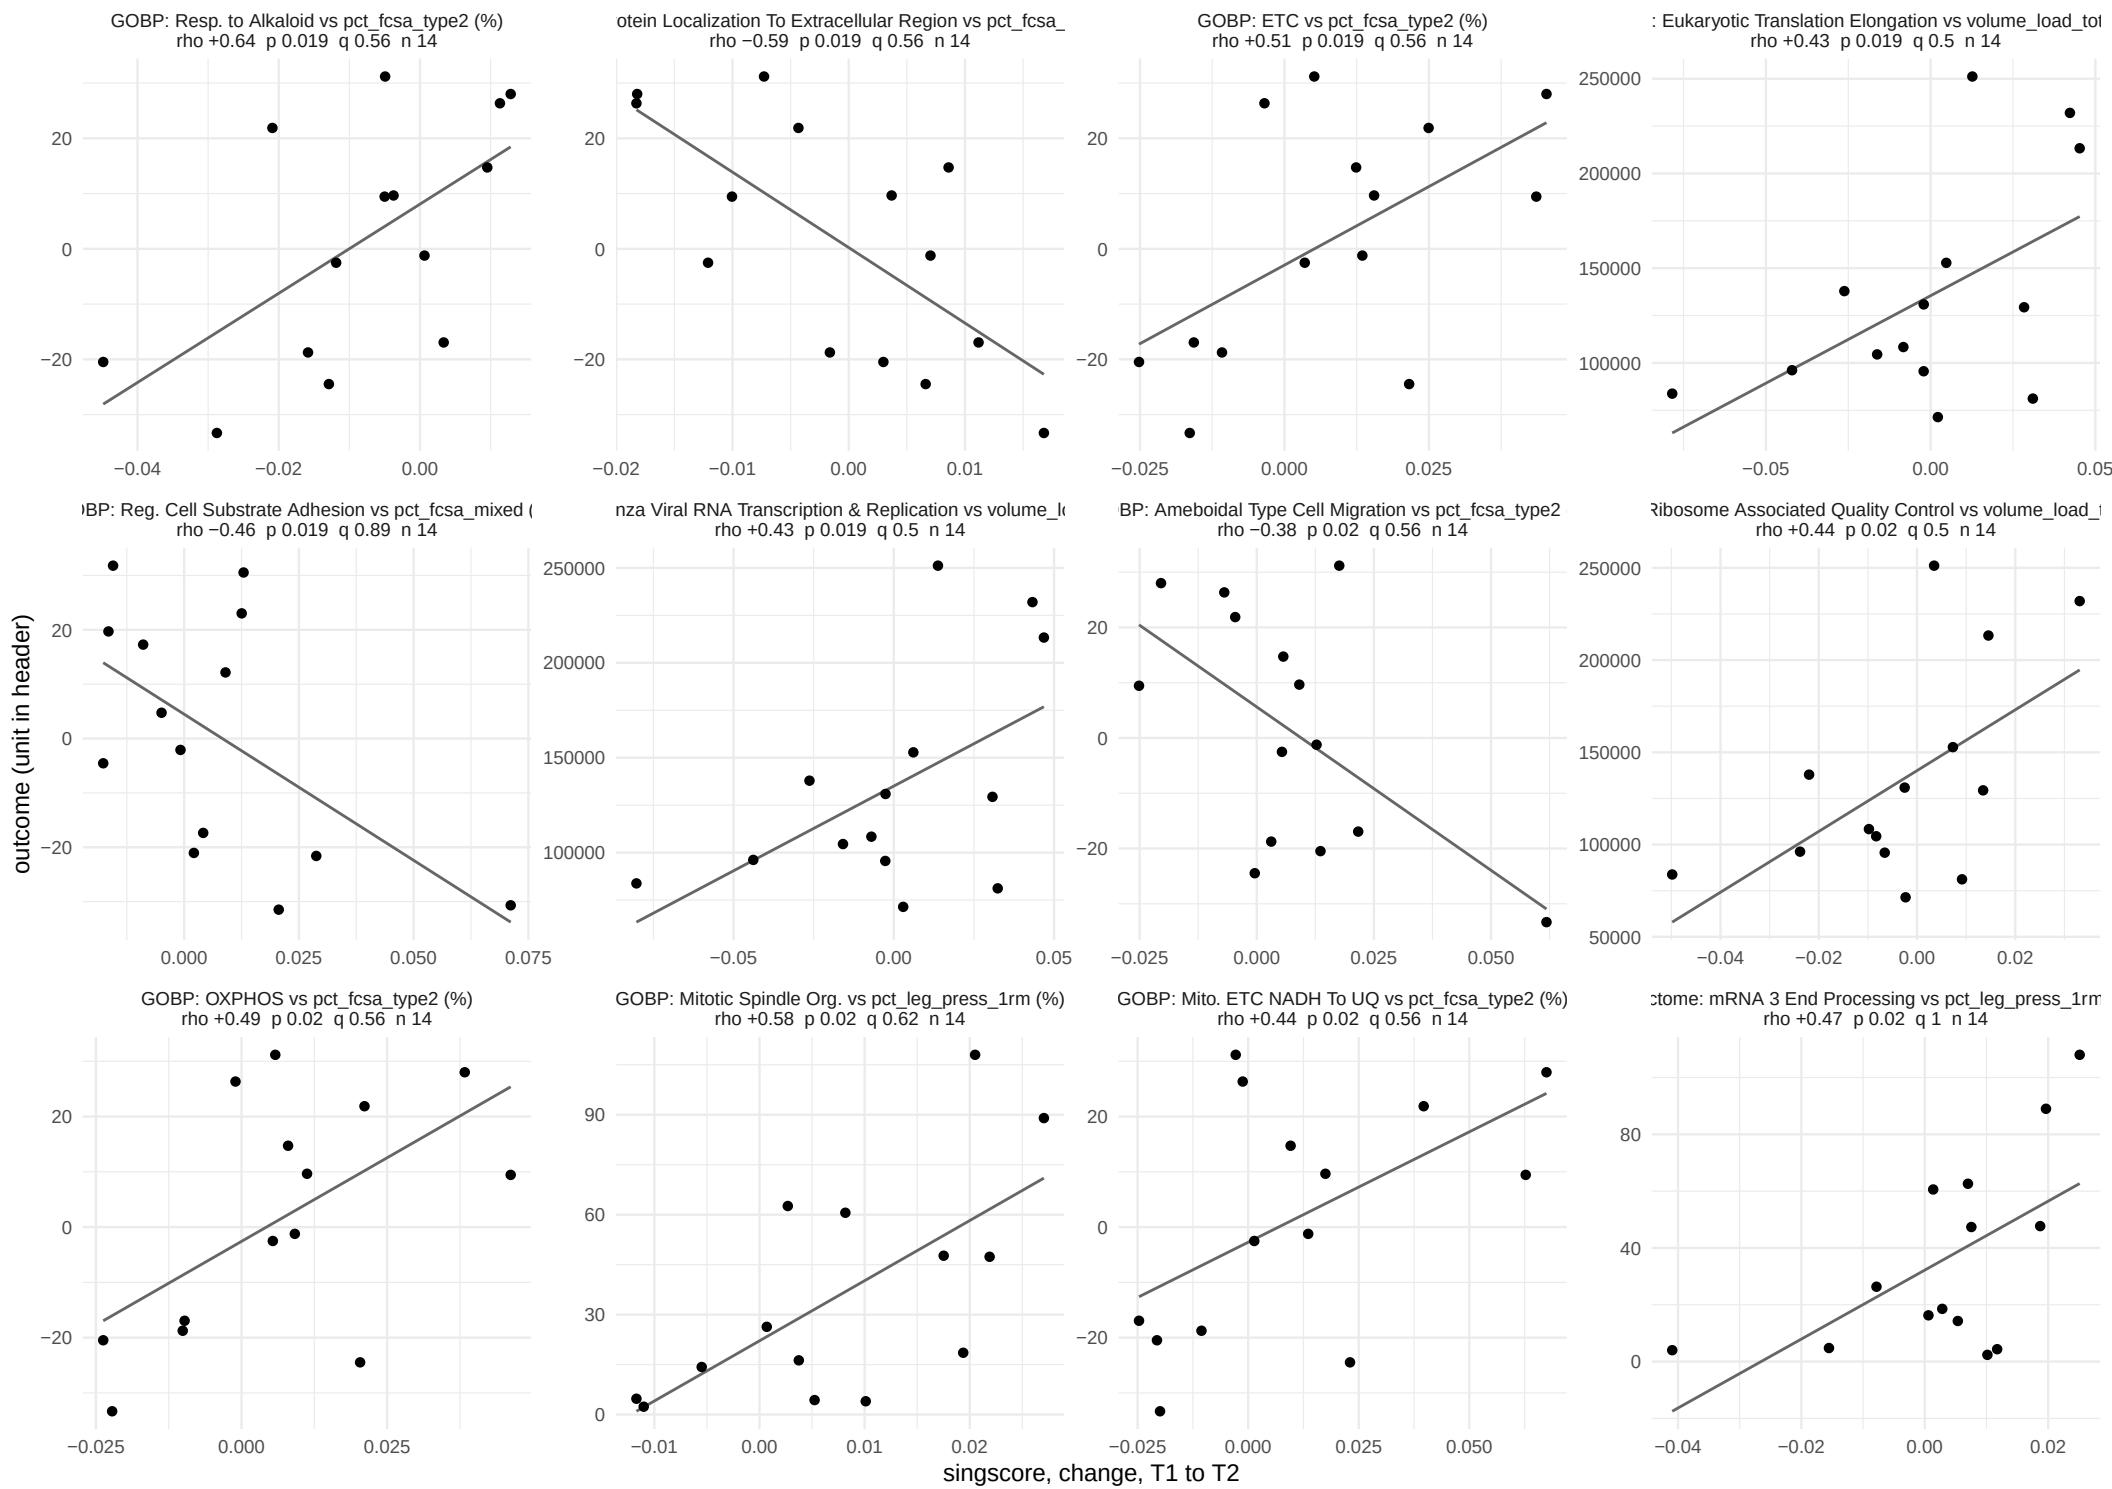

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, training window


413 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 10 of 35.

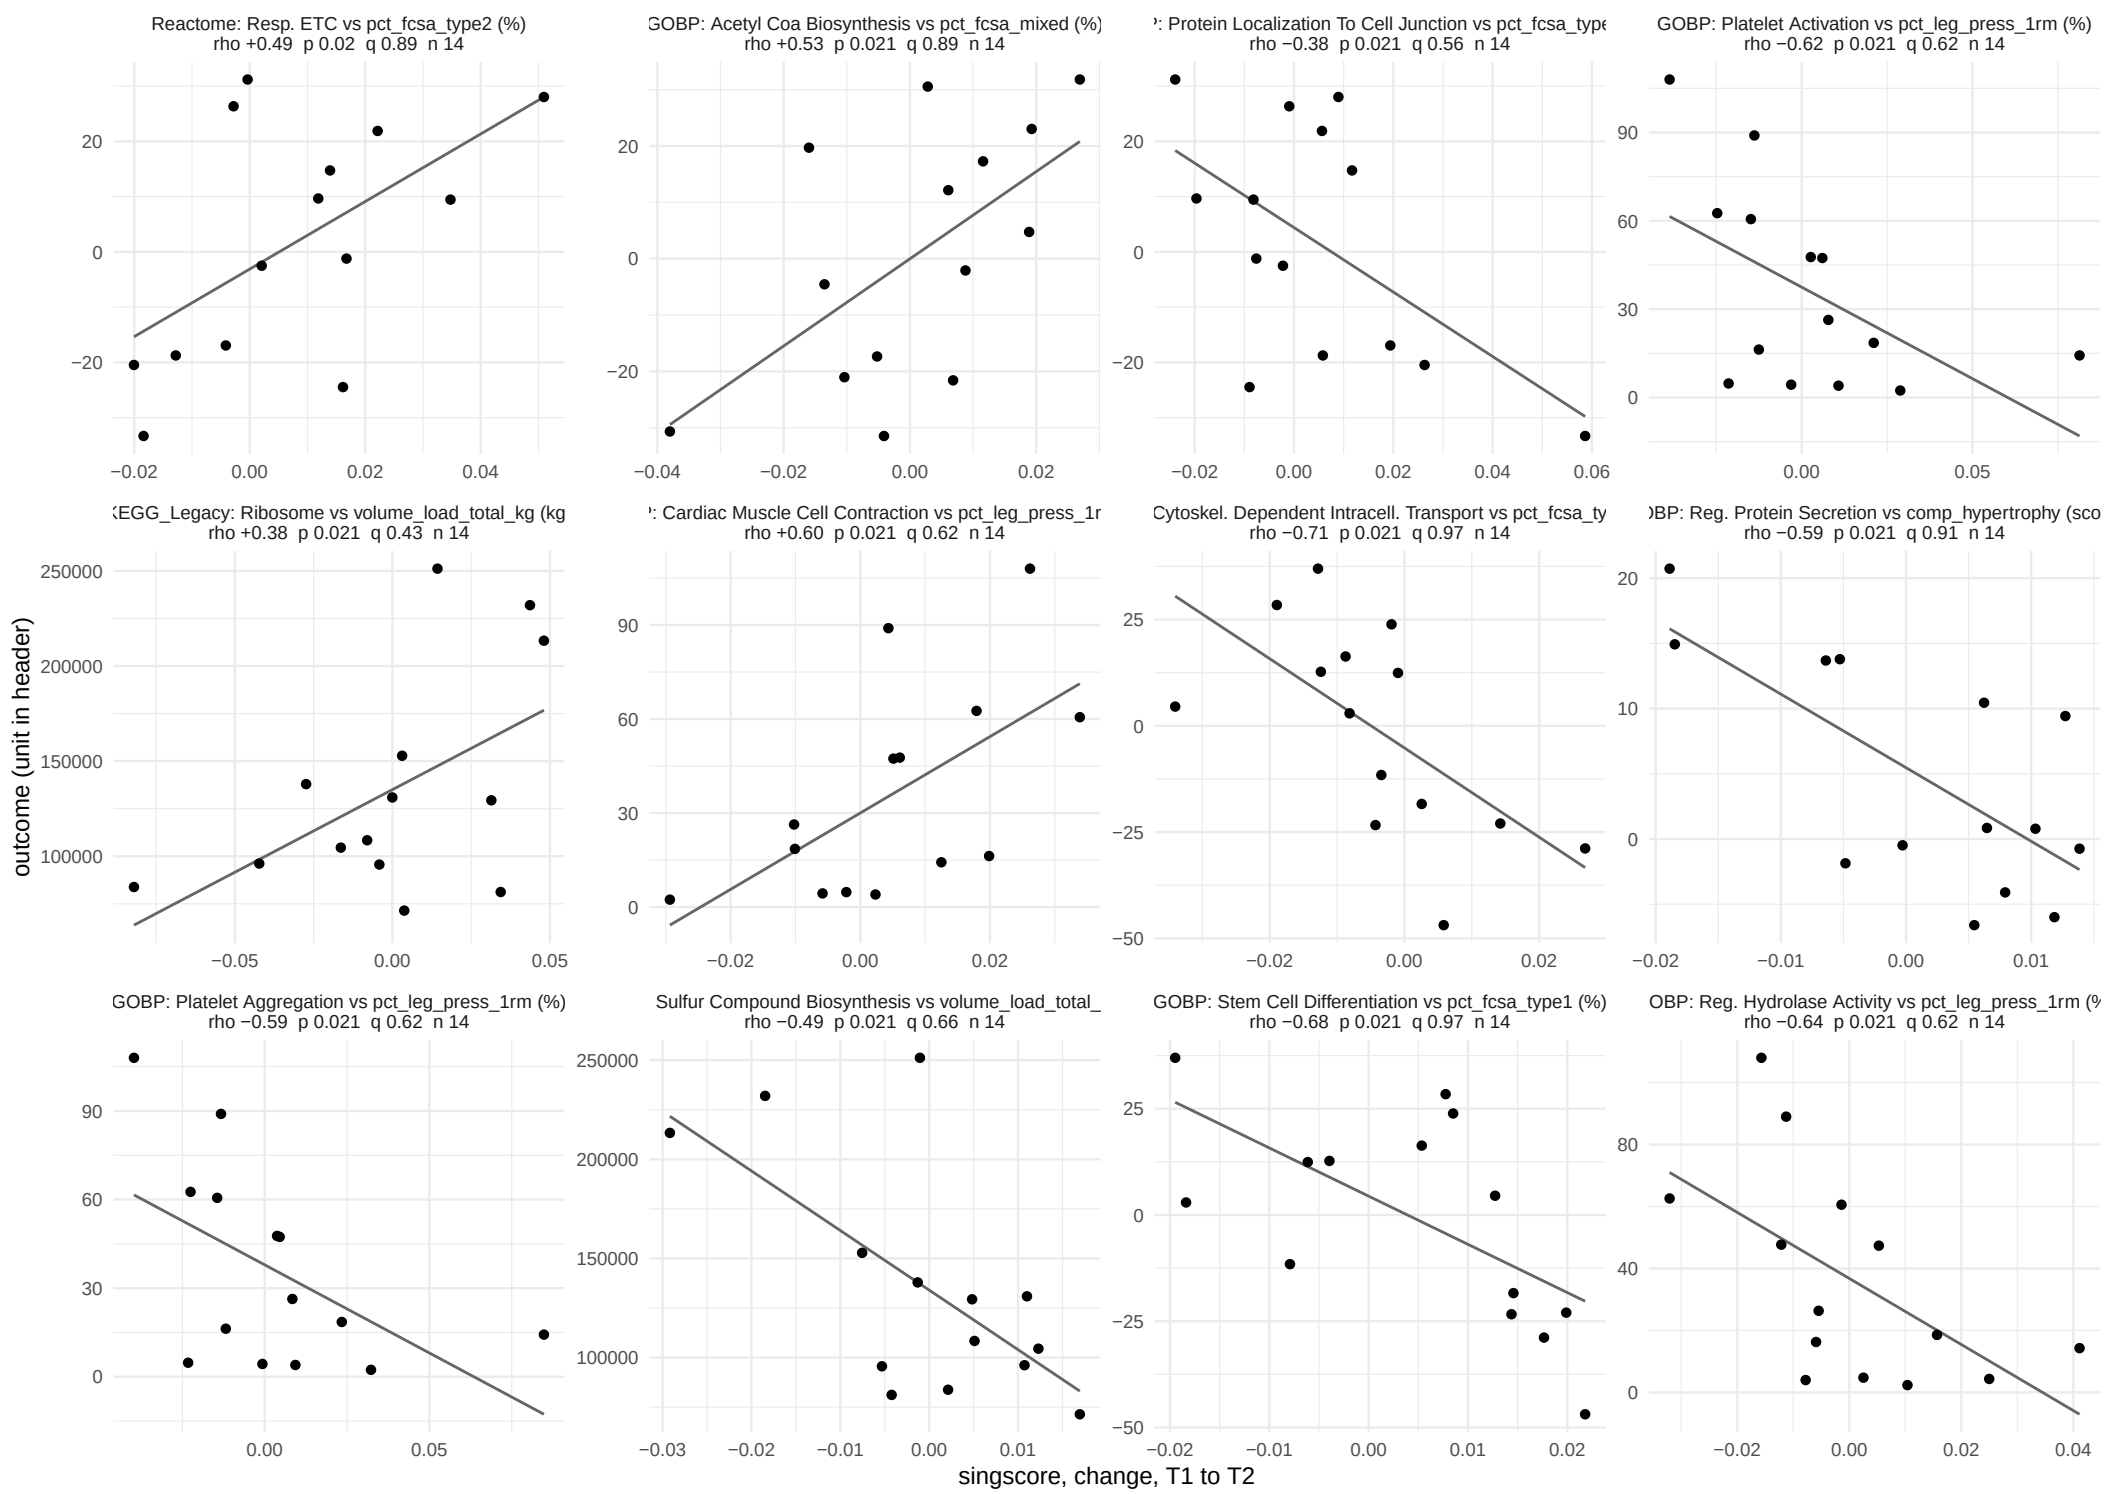

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, training window


413 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 11 of 35.

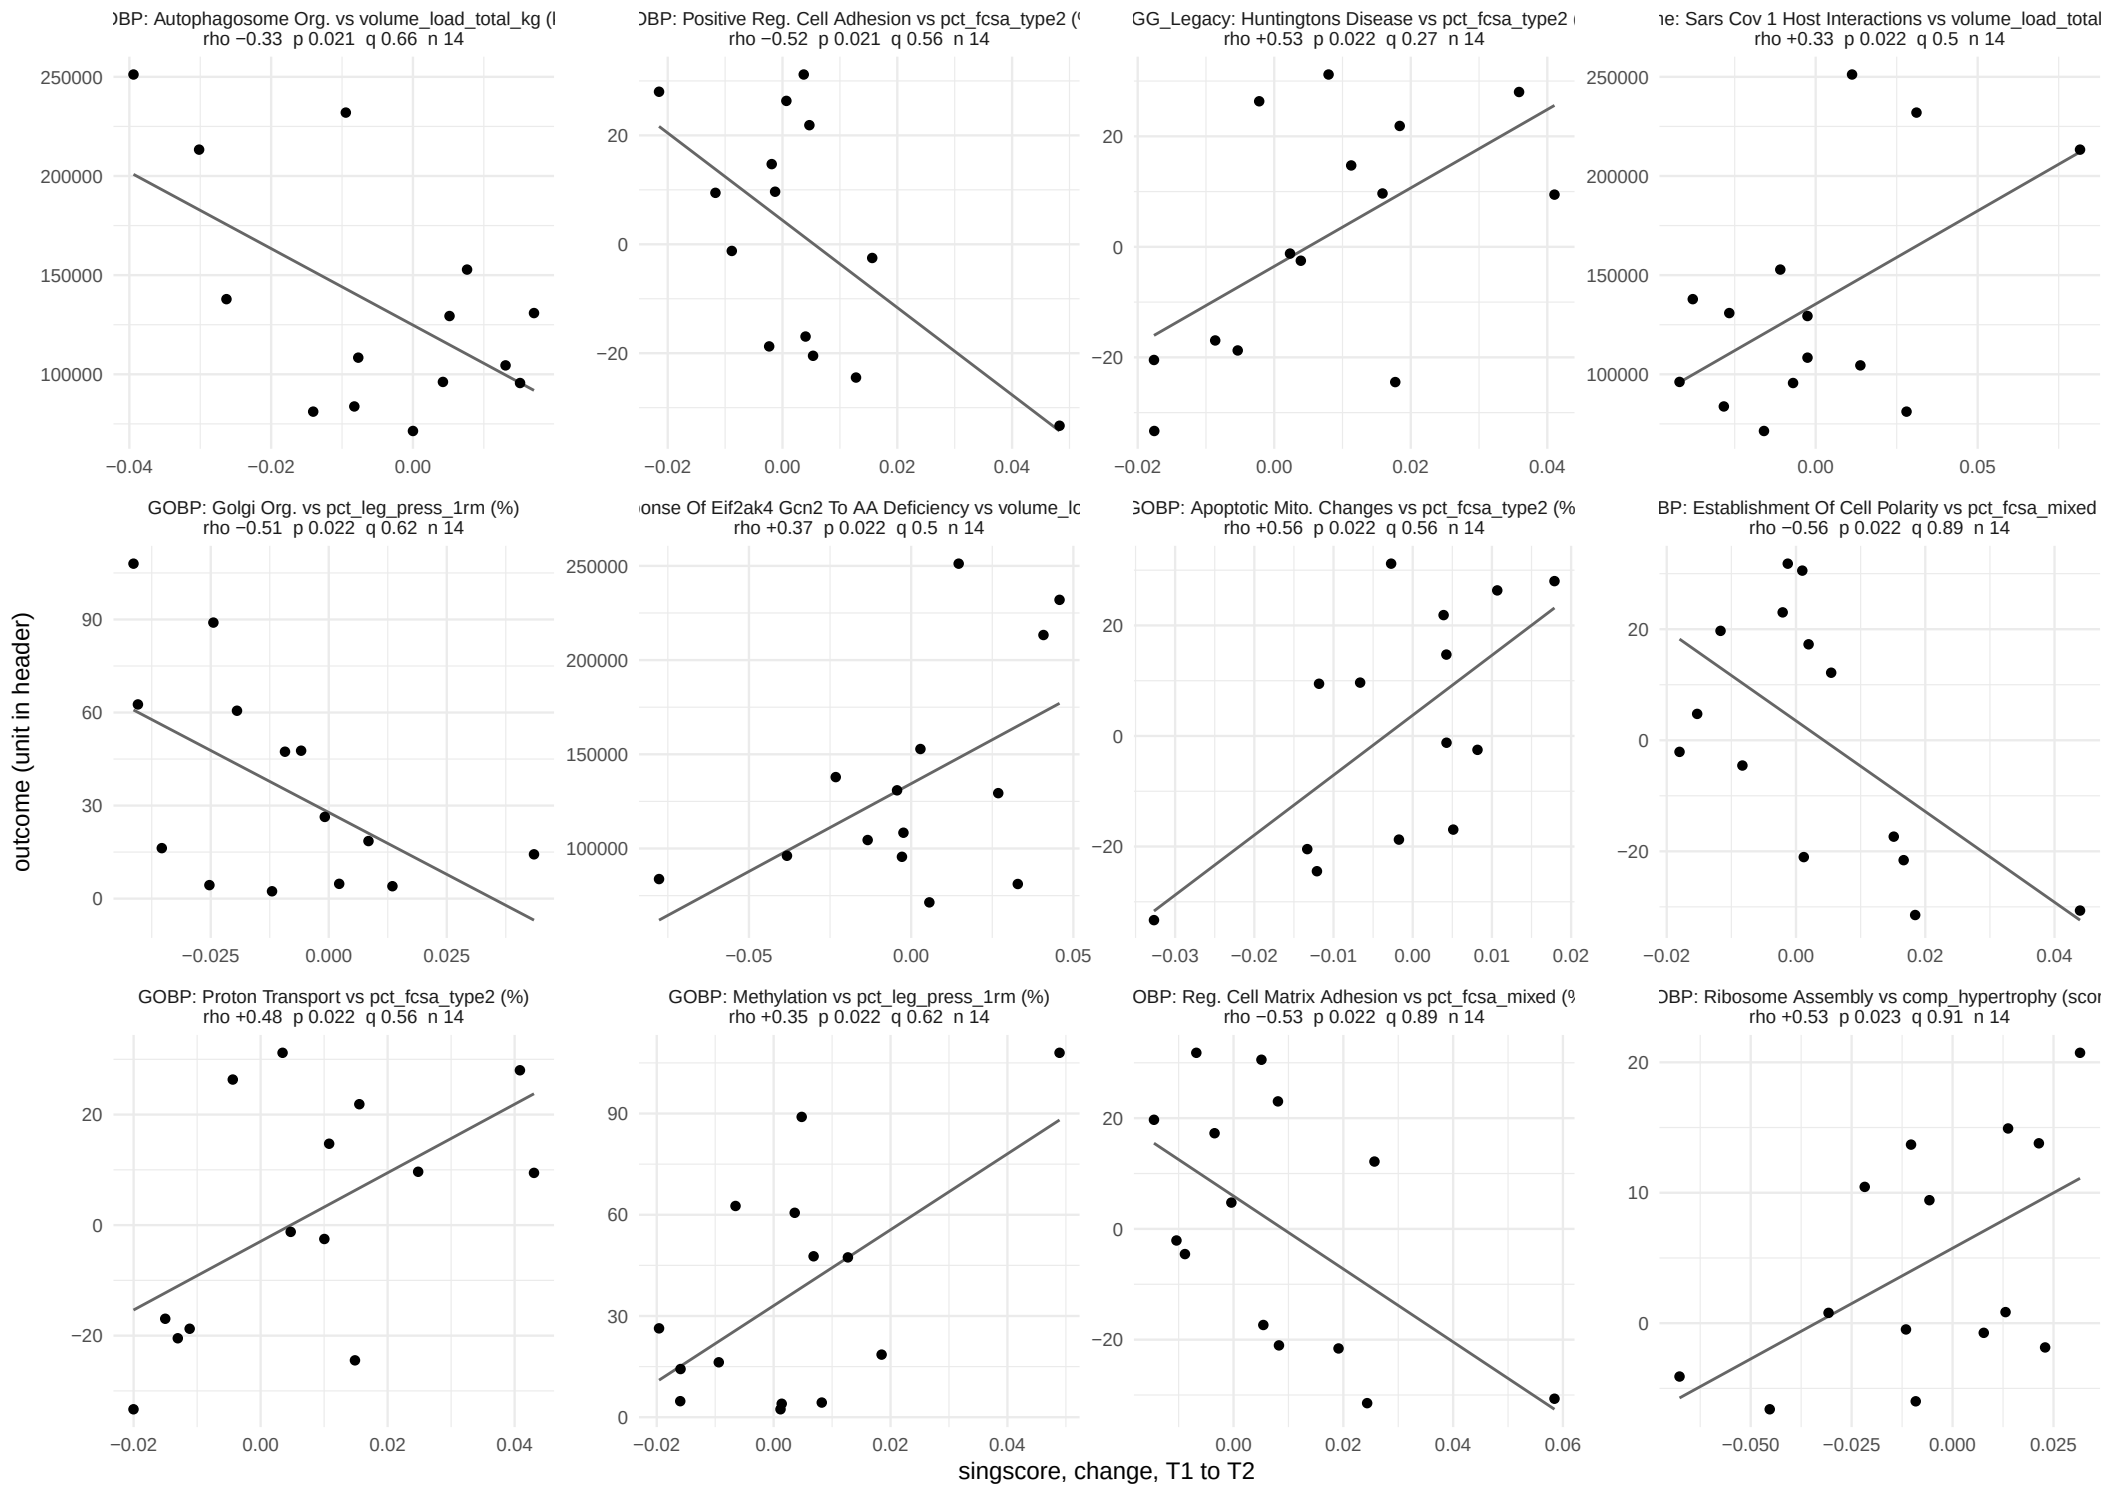

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, training window


413 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 12 of 35.

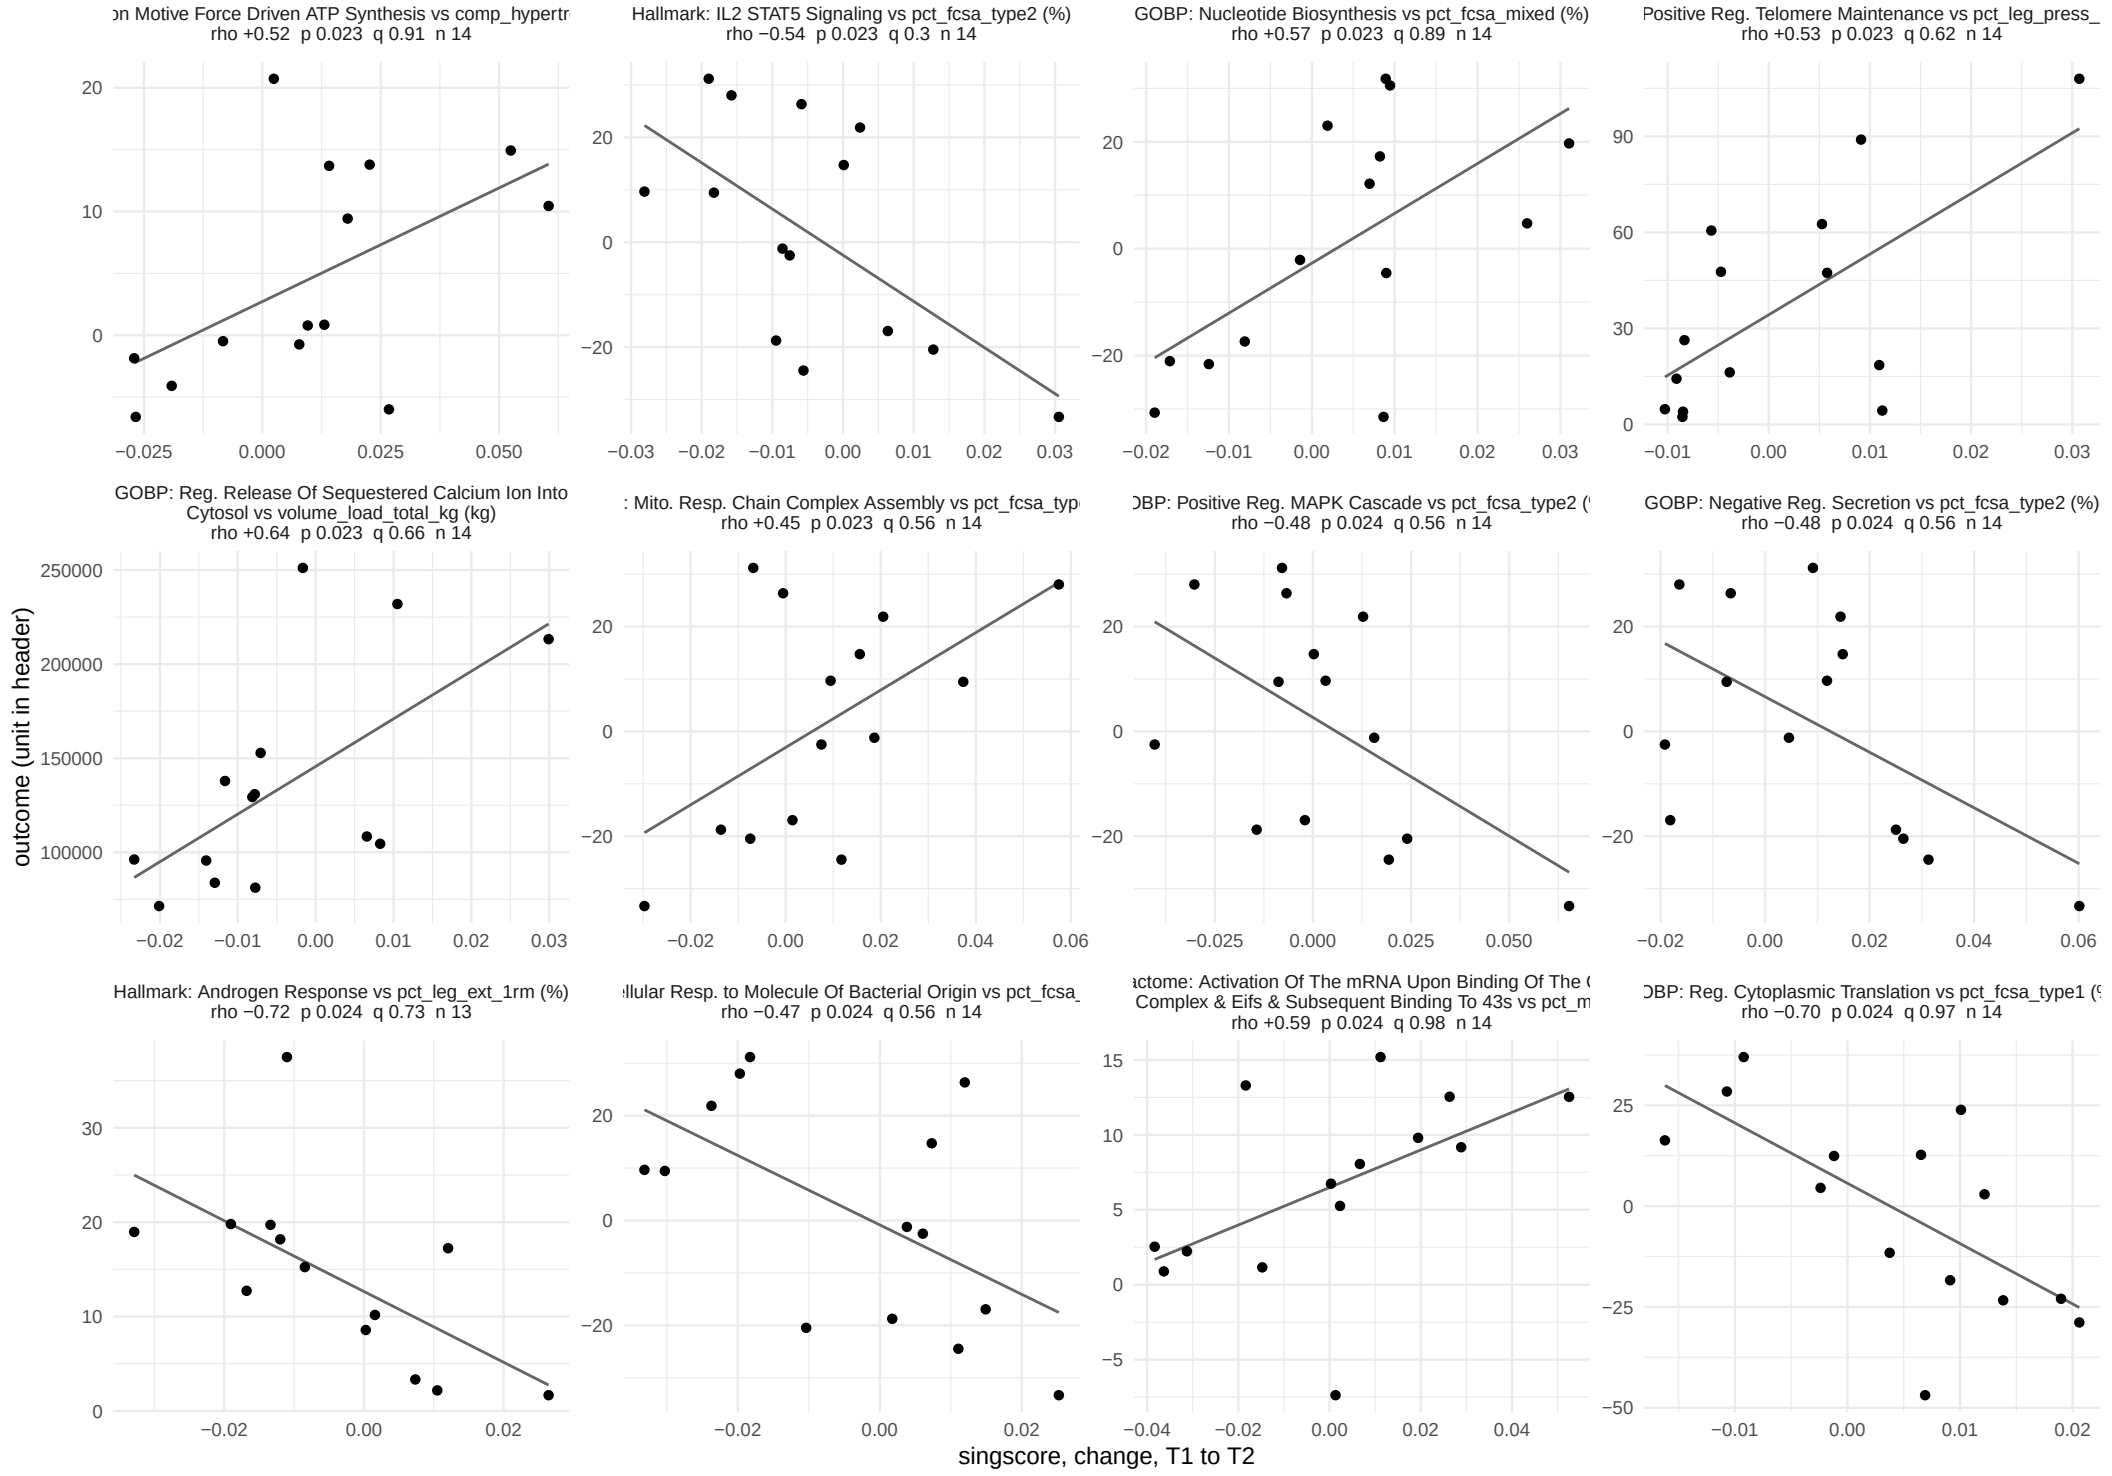

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, training window


413 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 13 of 35.

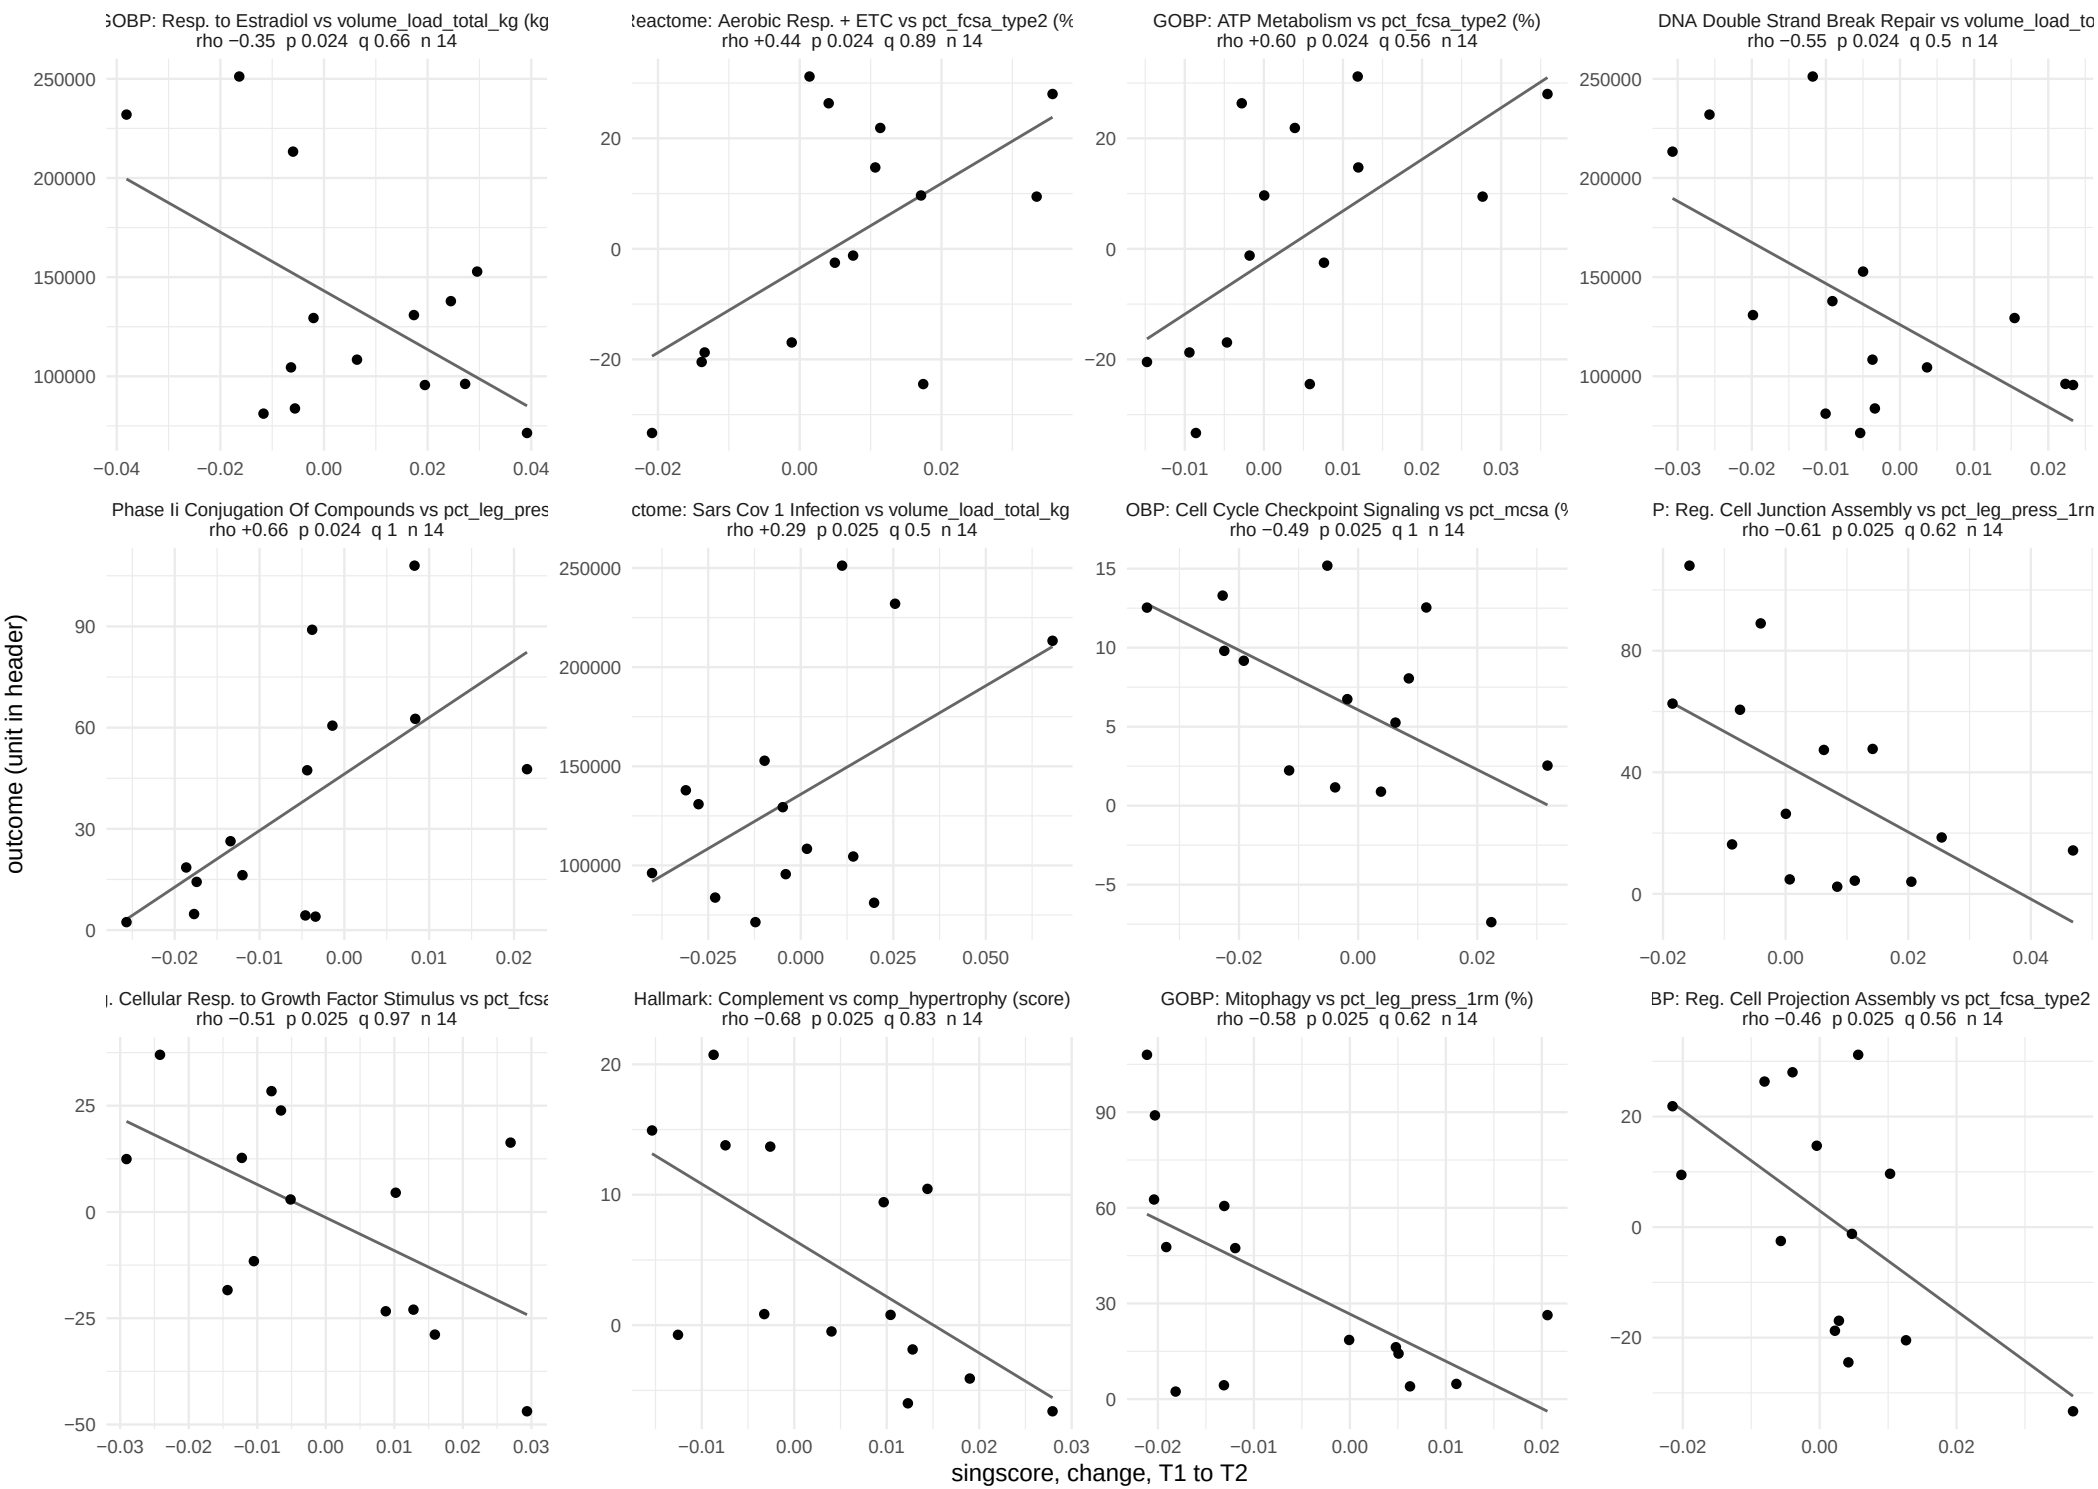

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, training window


413 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 14 of 35.

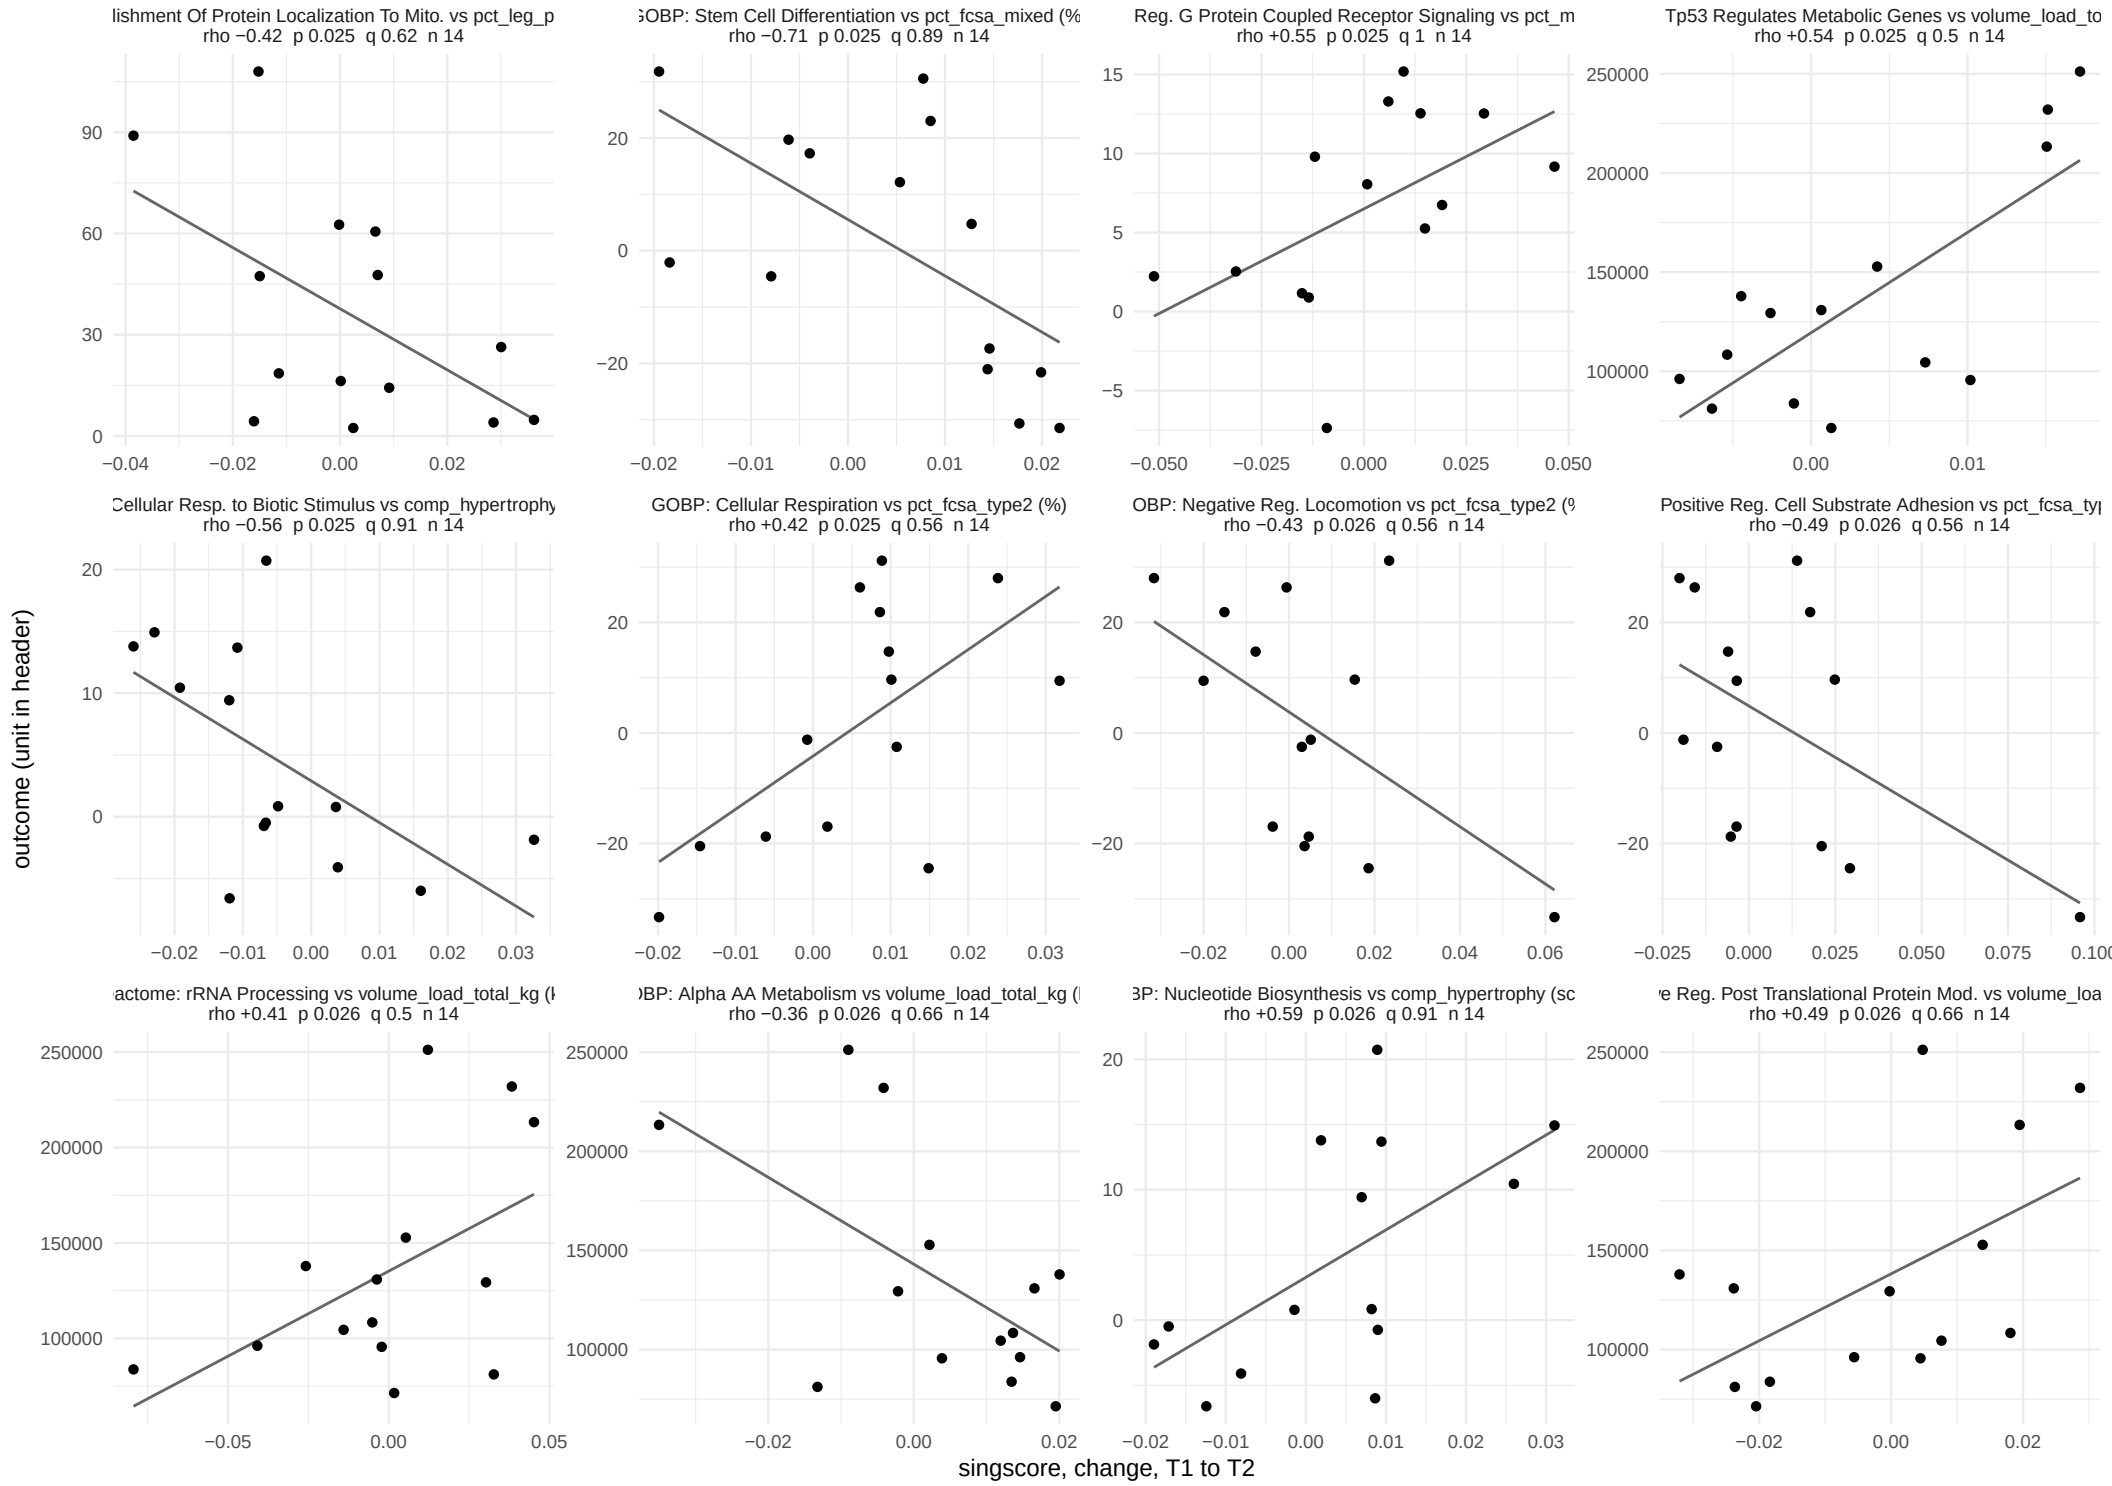

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, training window


413 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 15 of 35.

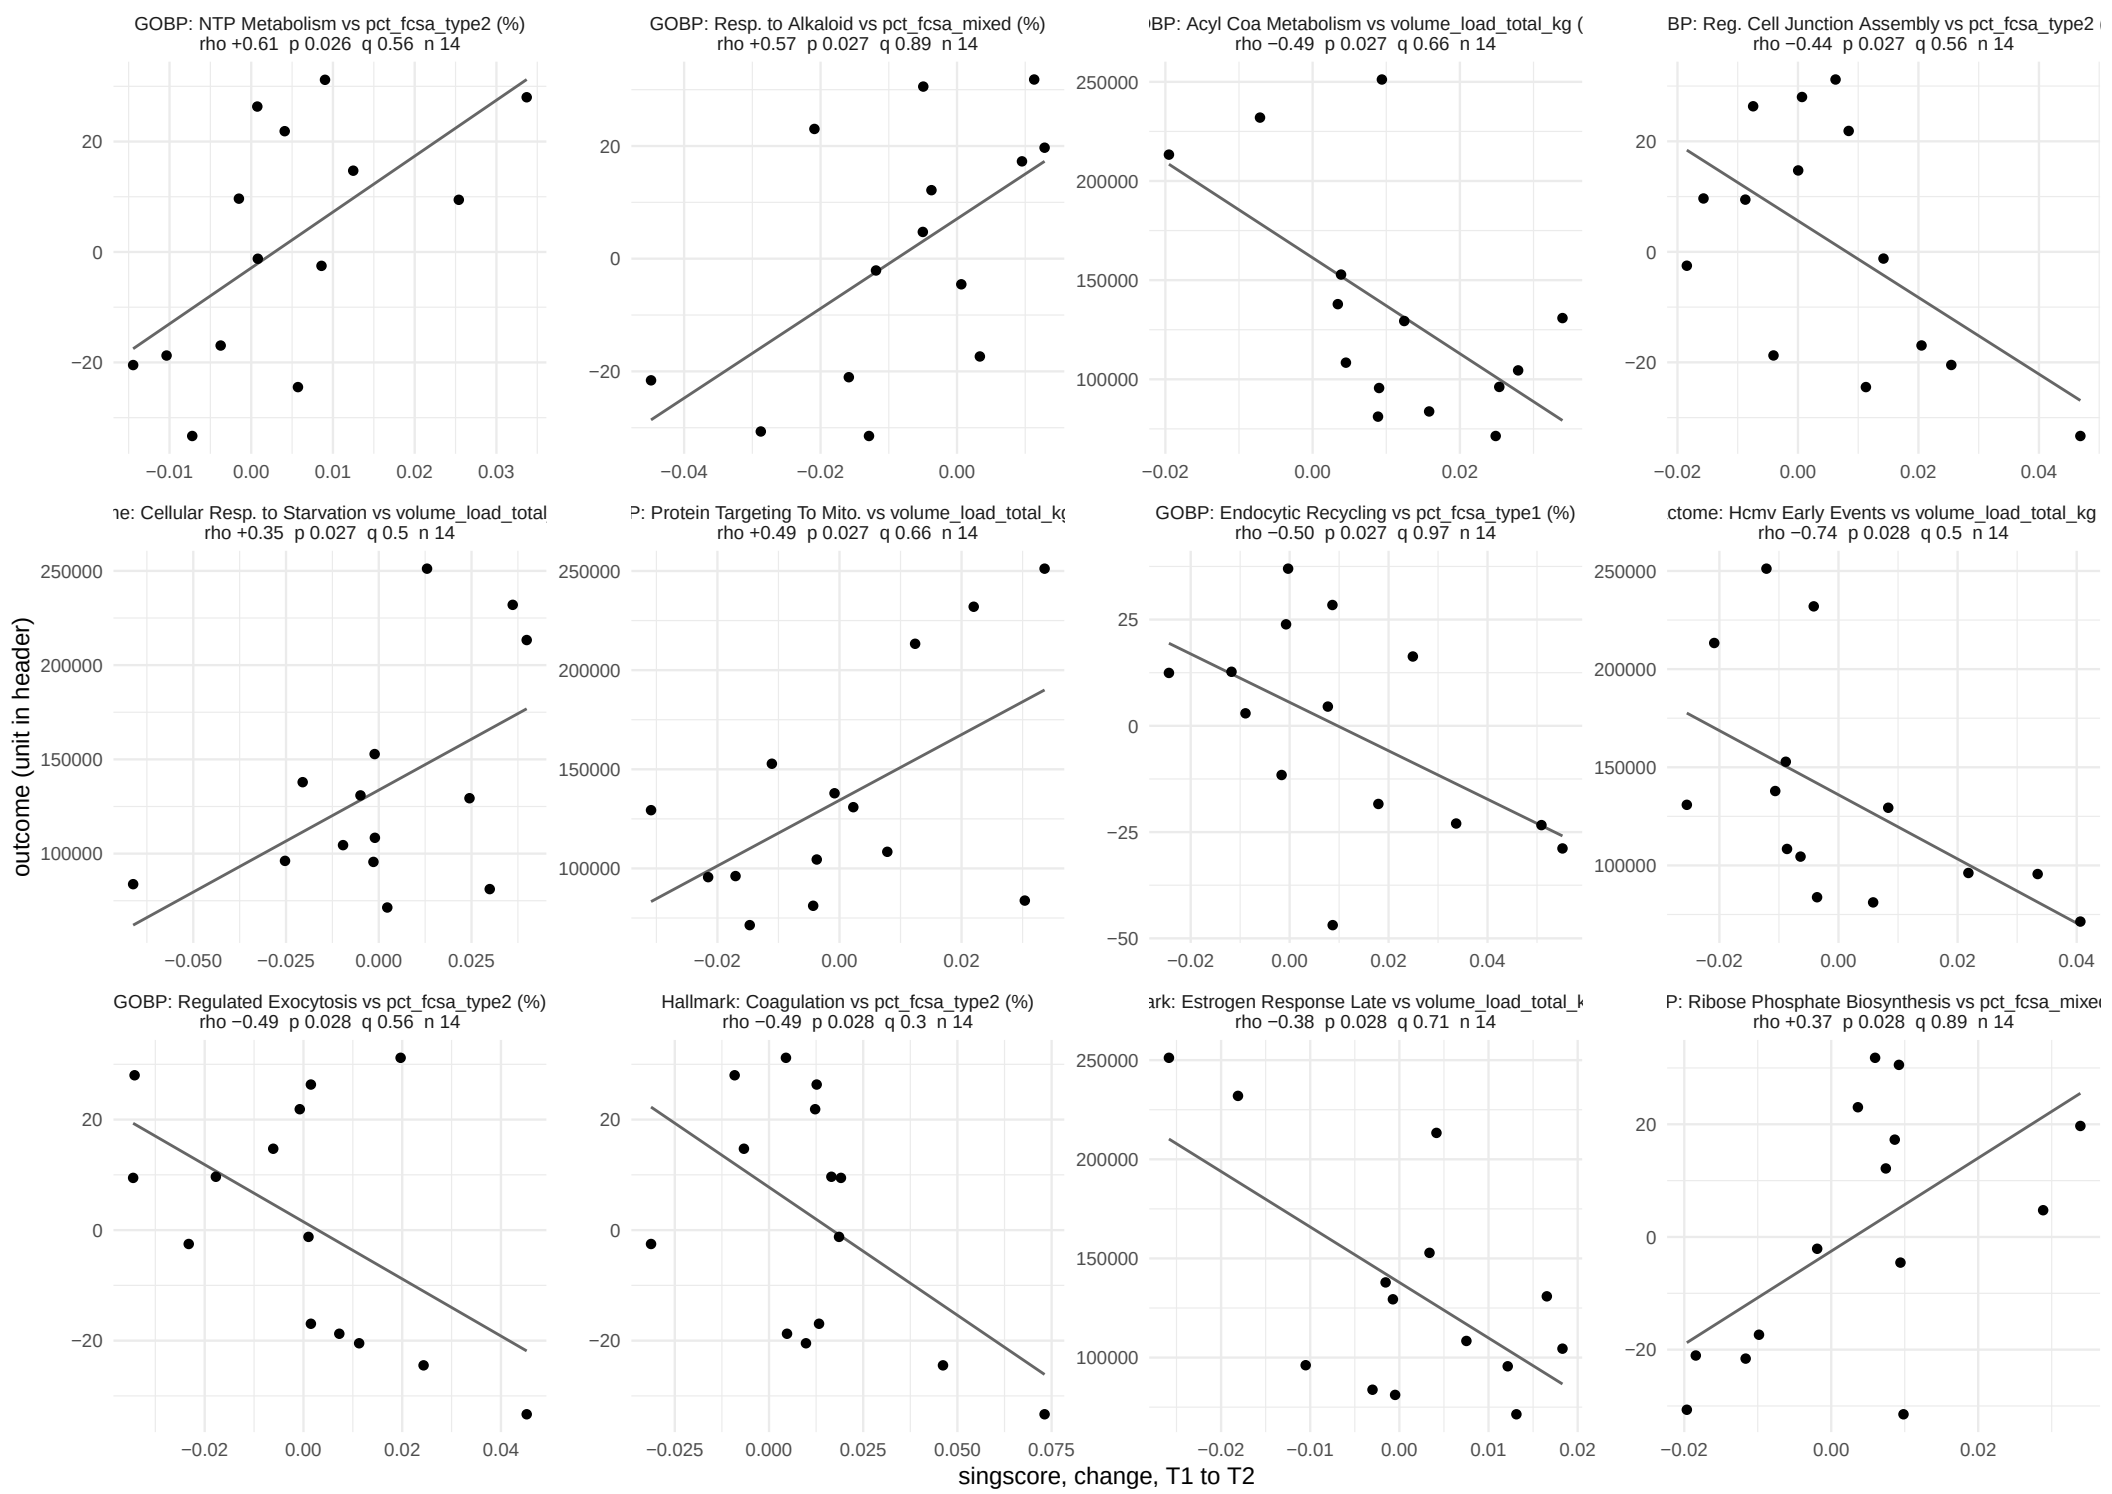

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, training window


413 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 16 of 35.

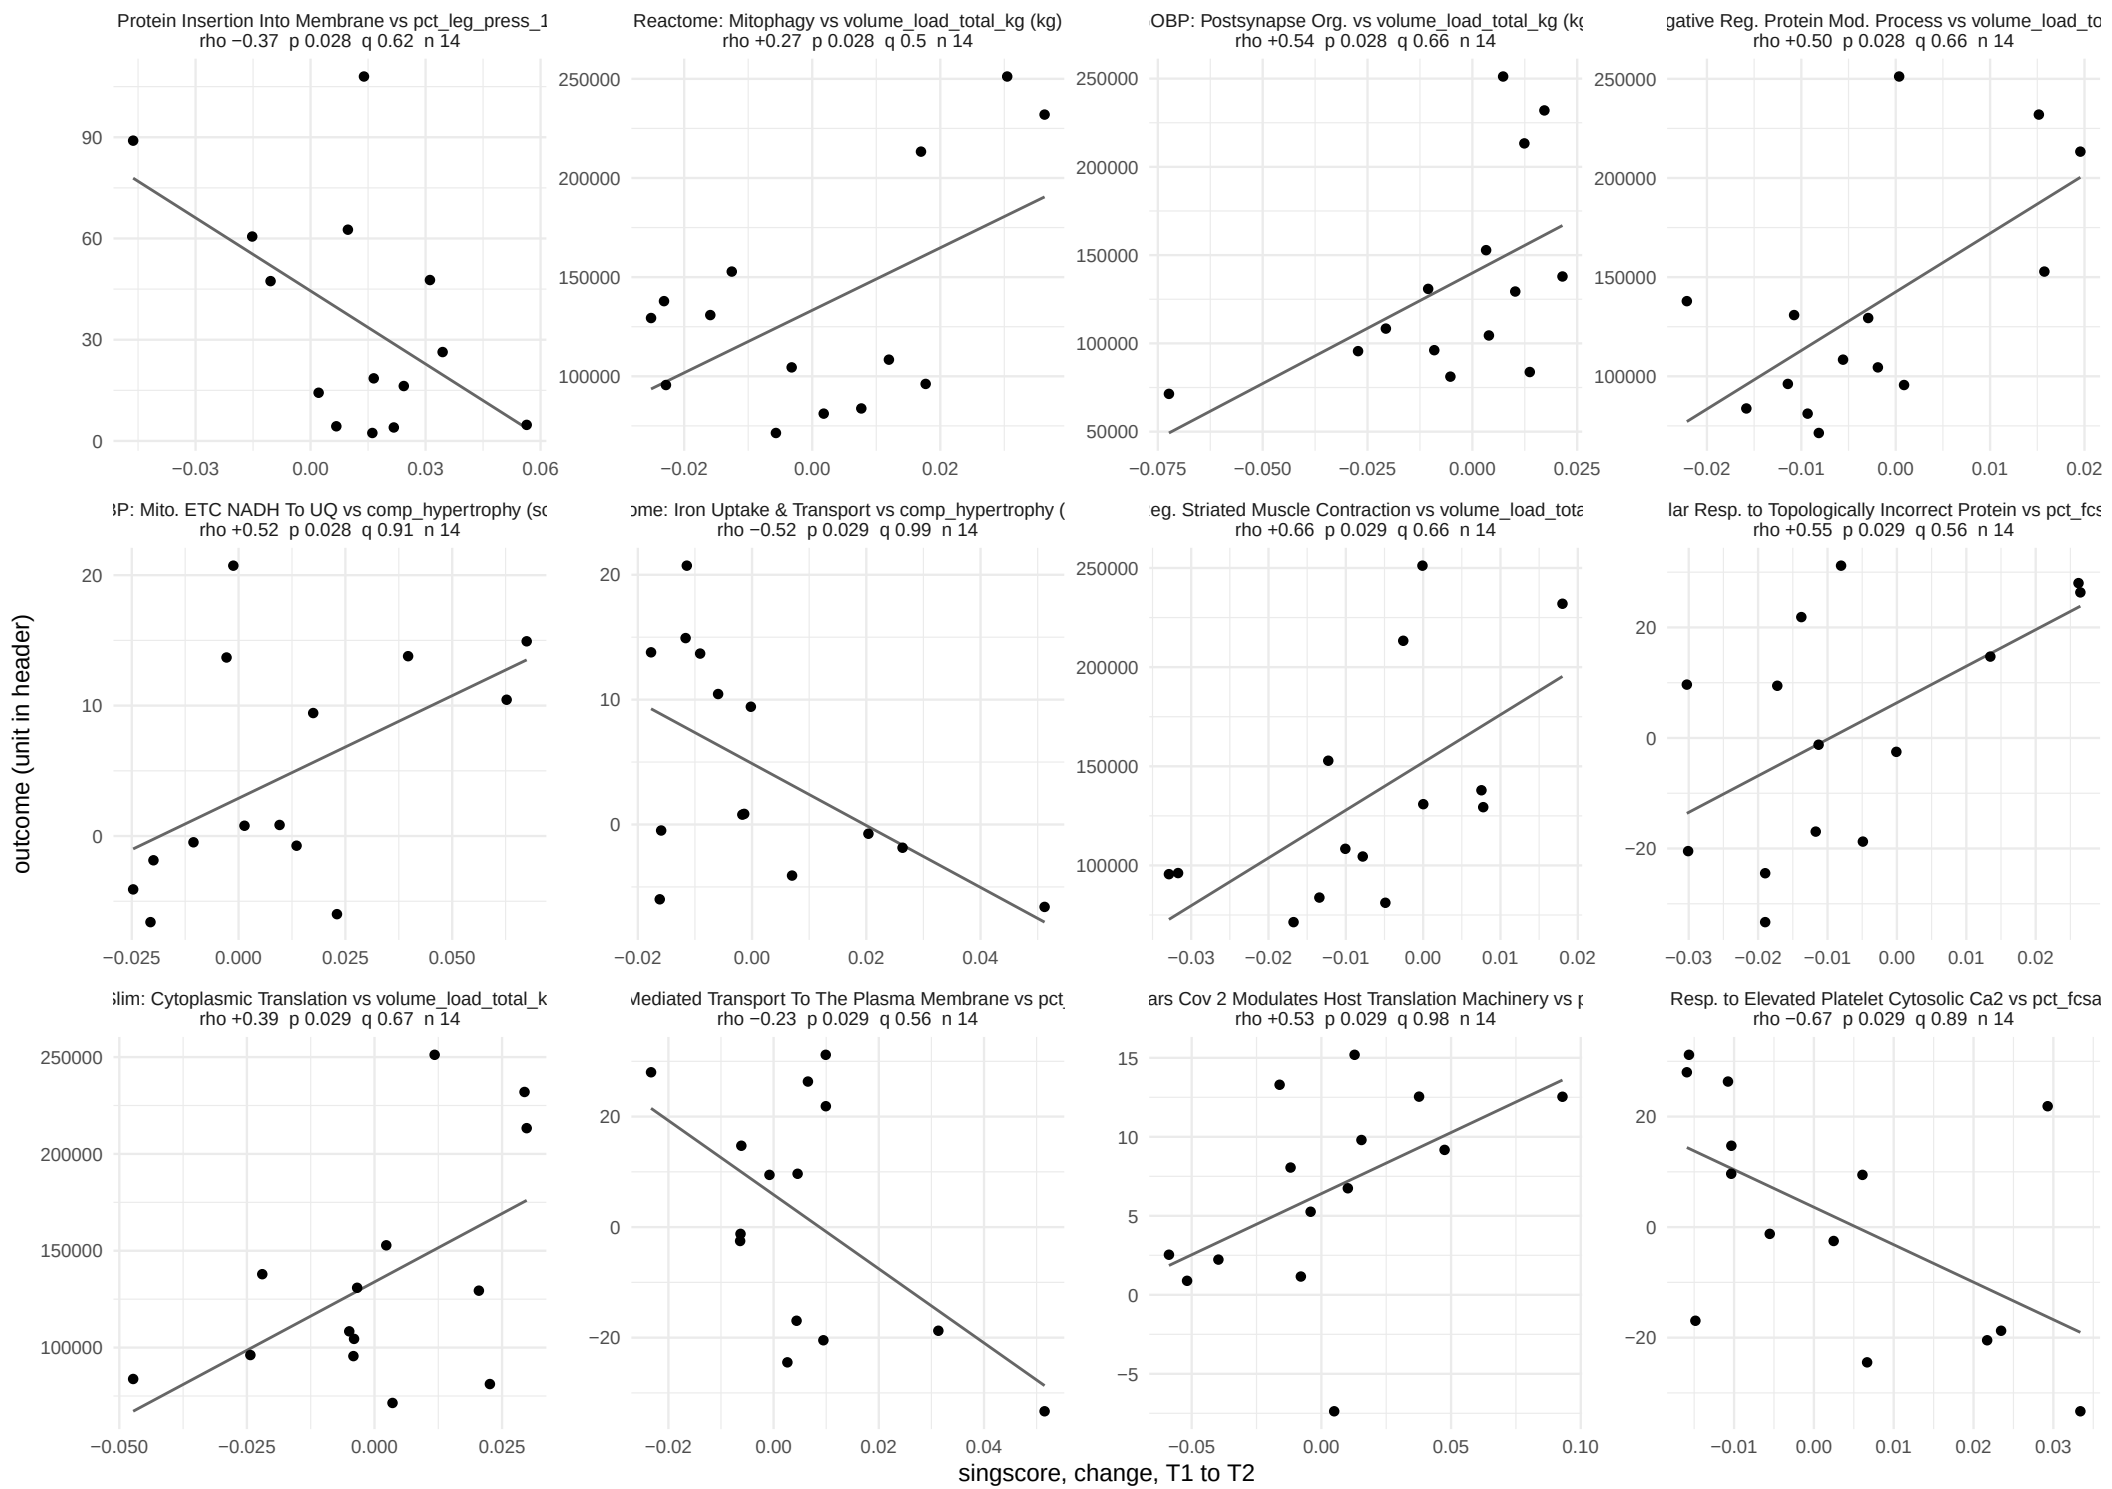

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, training window


413 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 17 of 35.

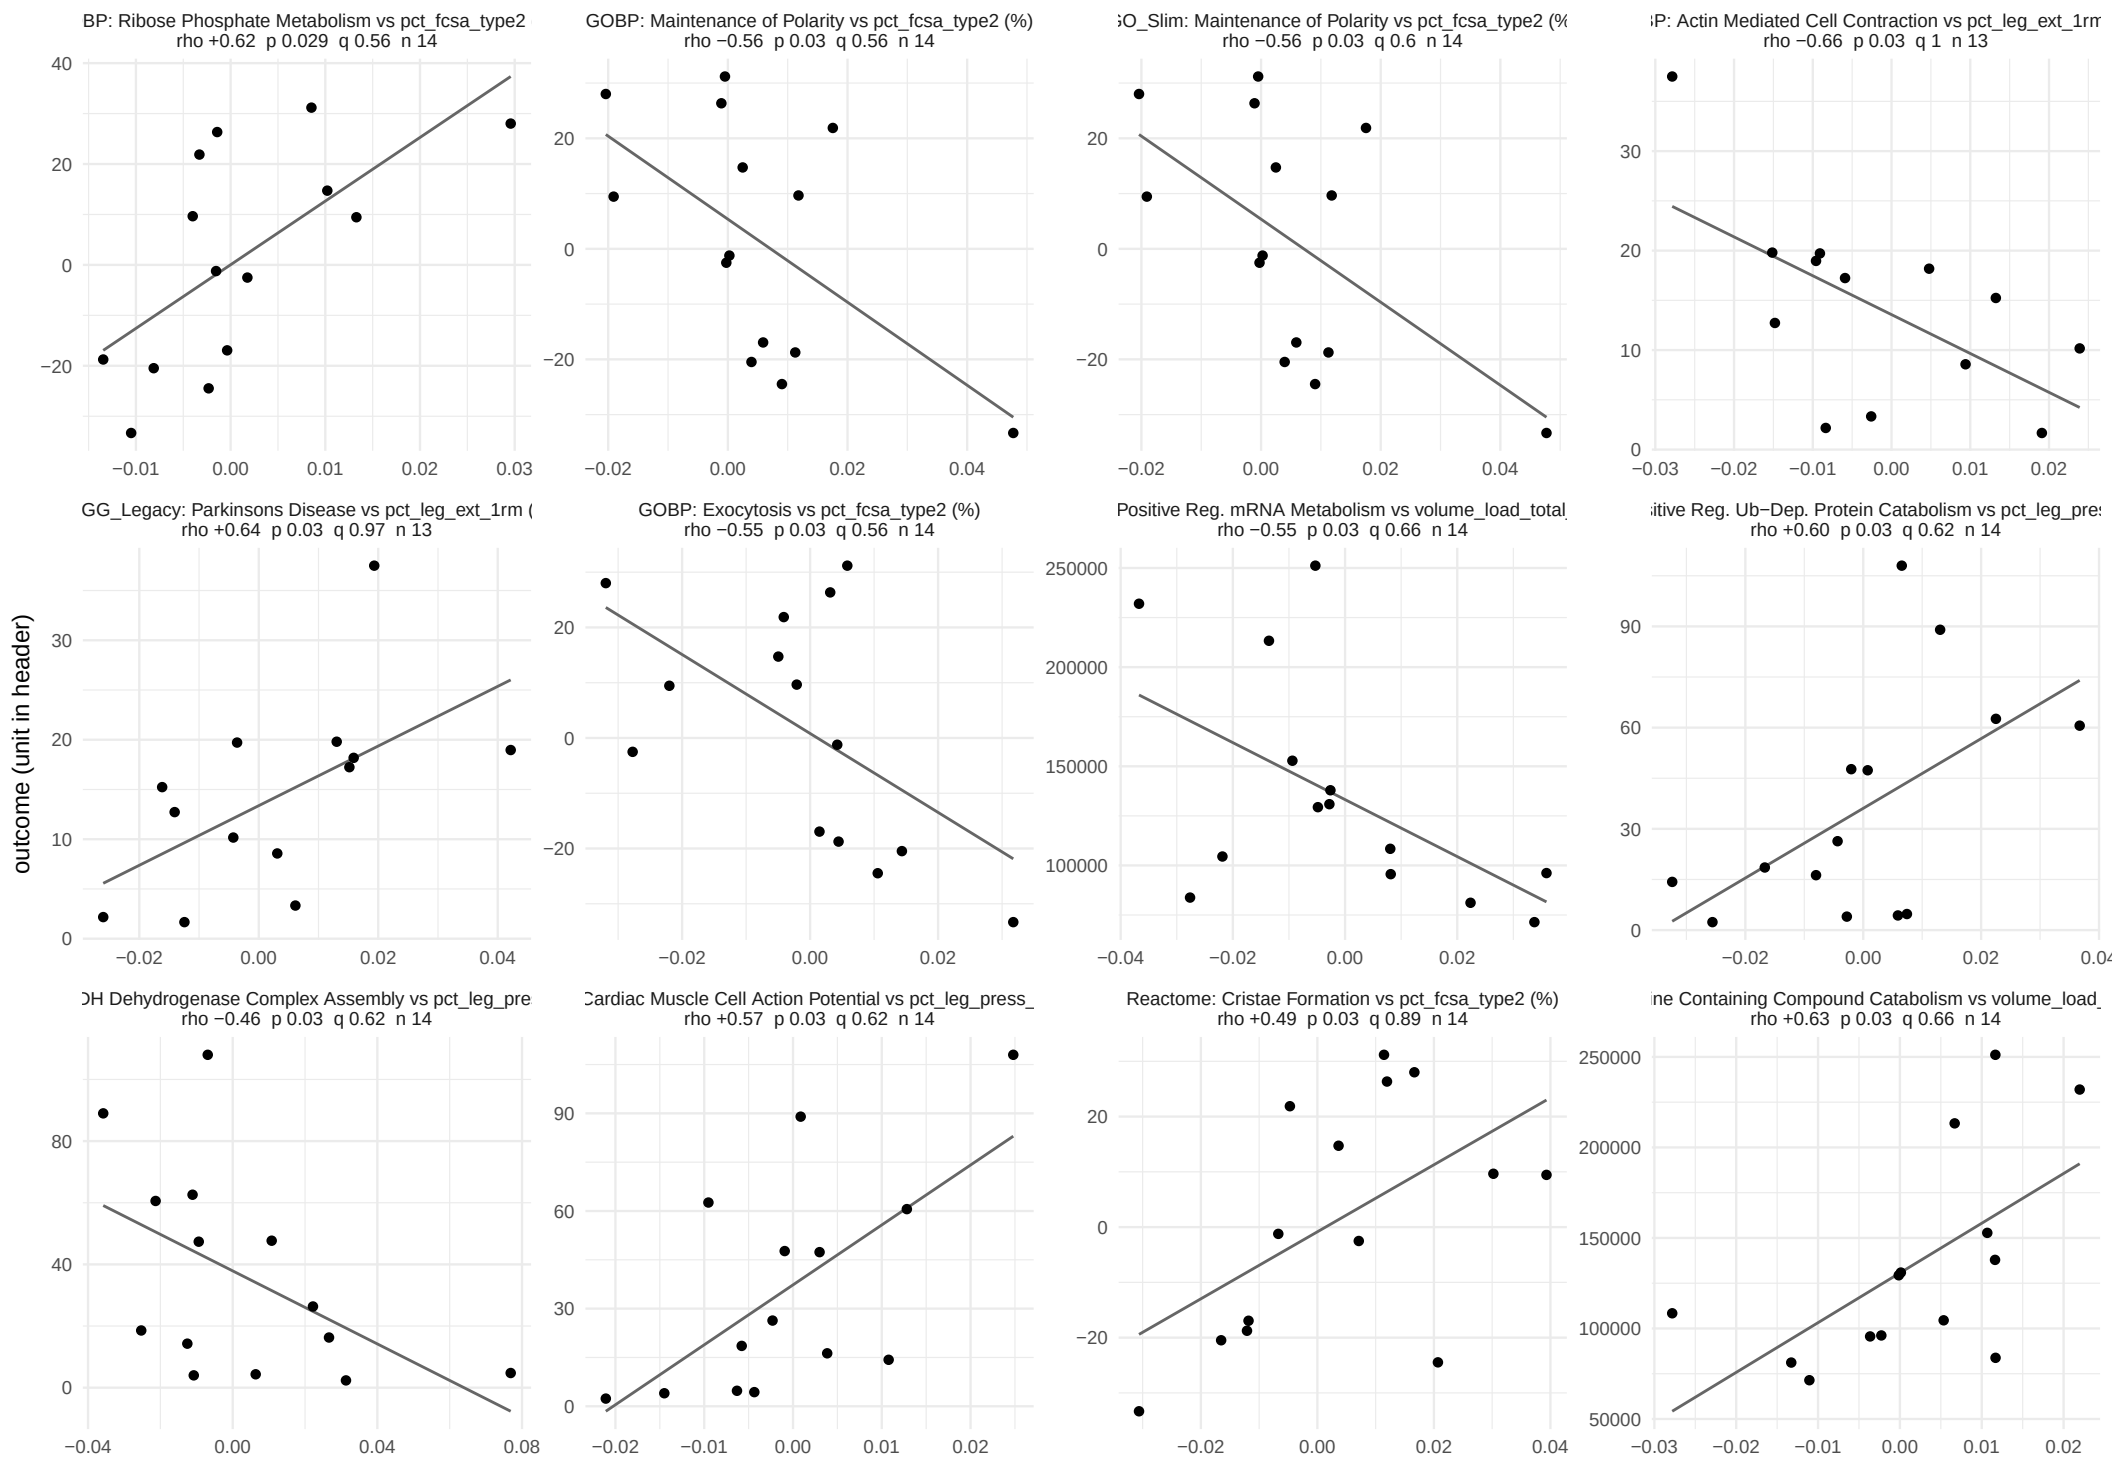

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, training window


413 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 18 of 35.

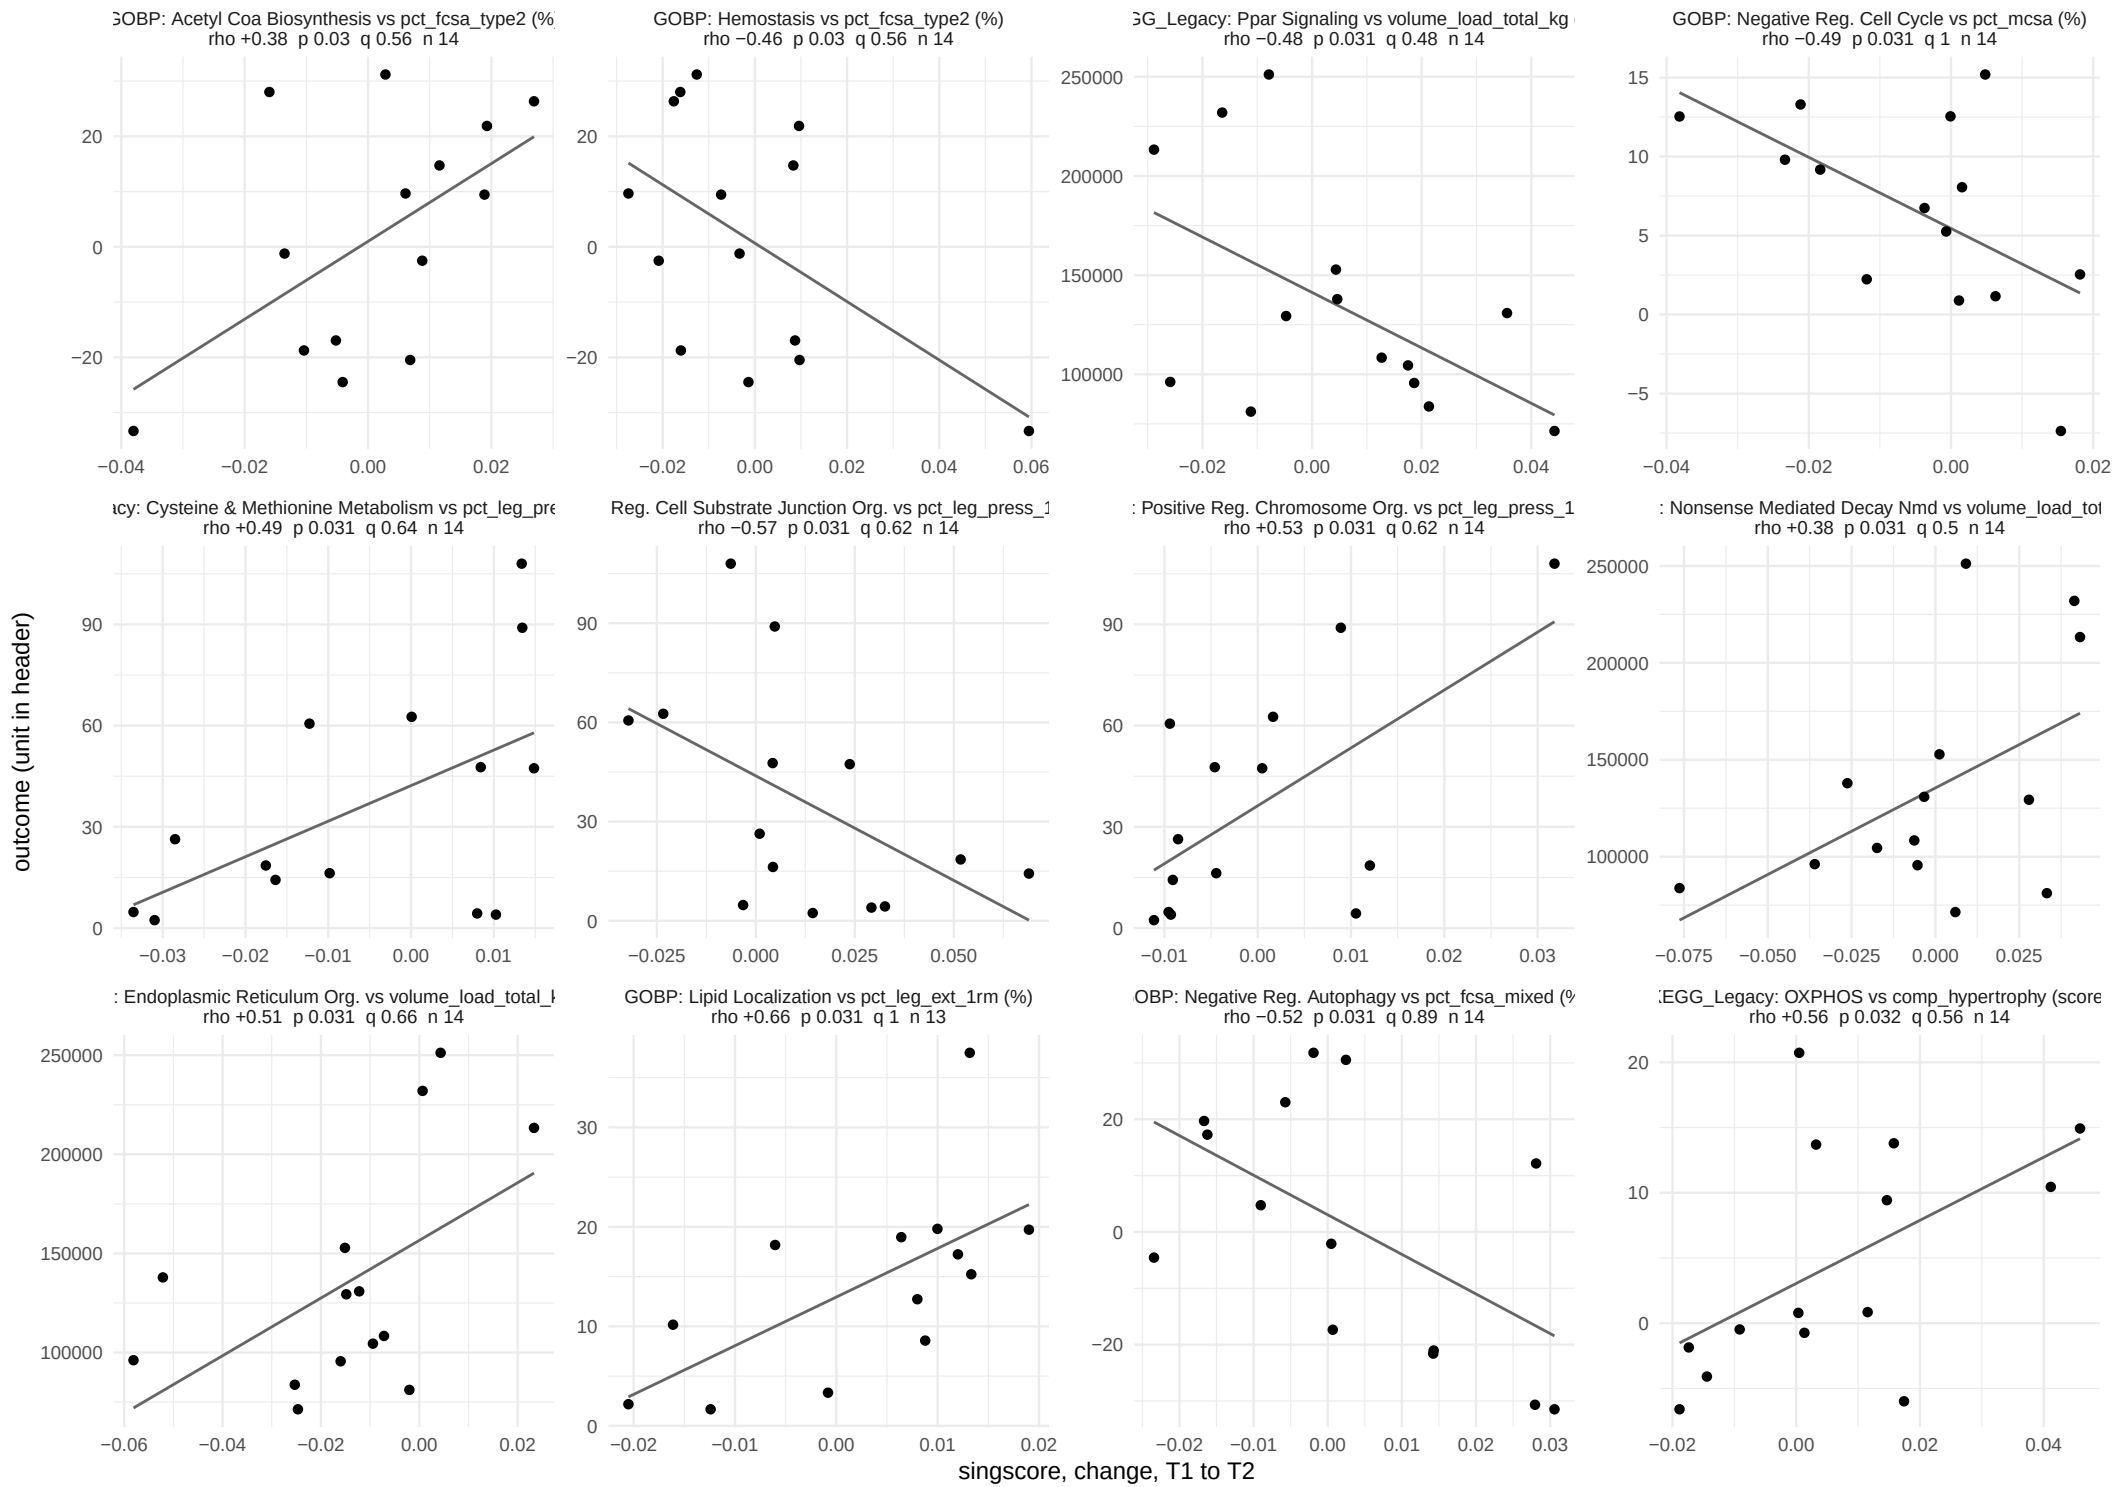

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, training window


413 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 19 of 35.

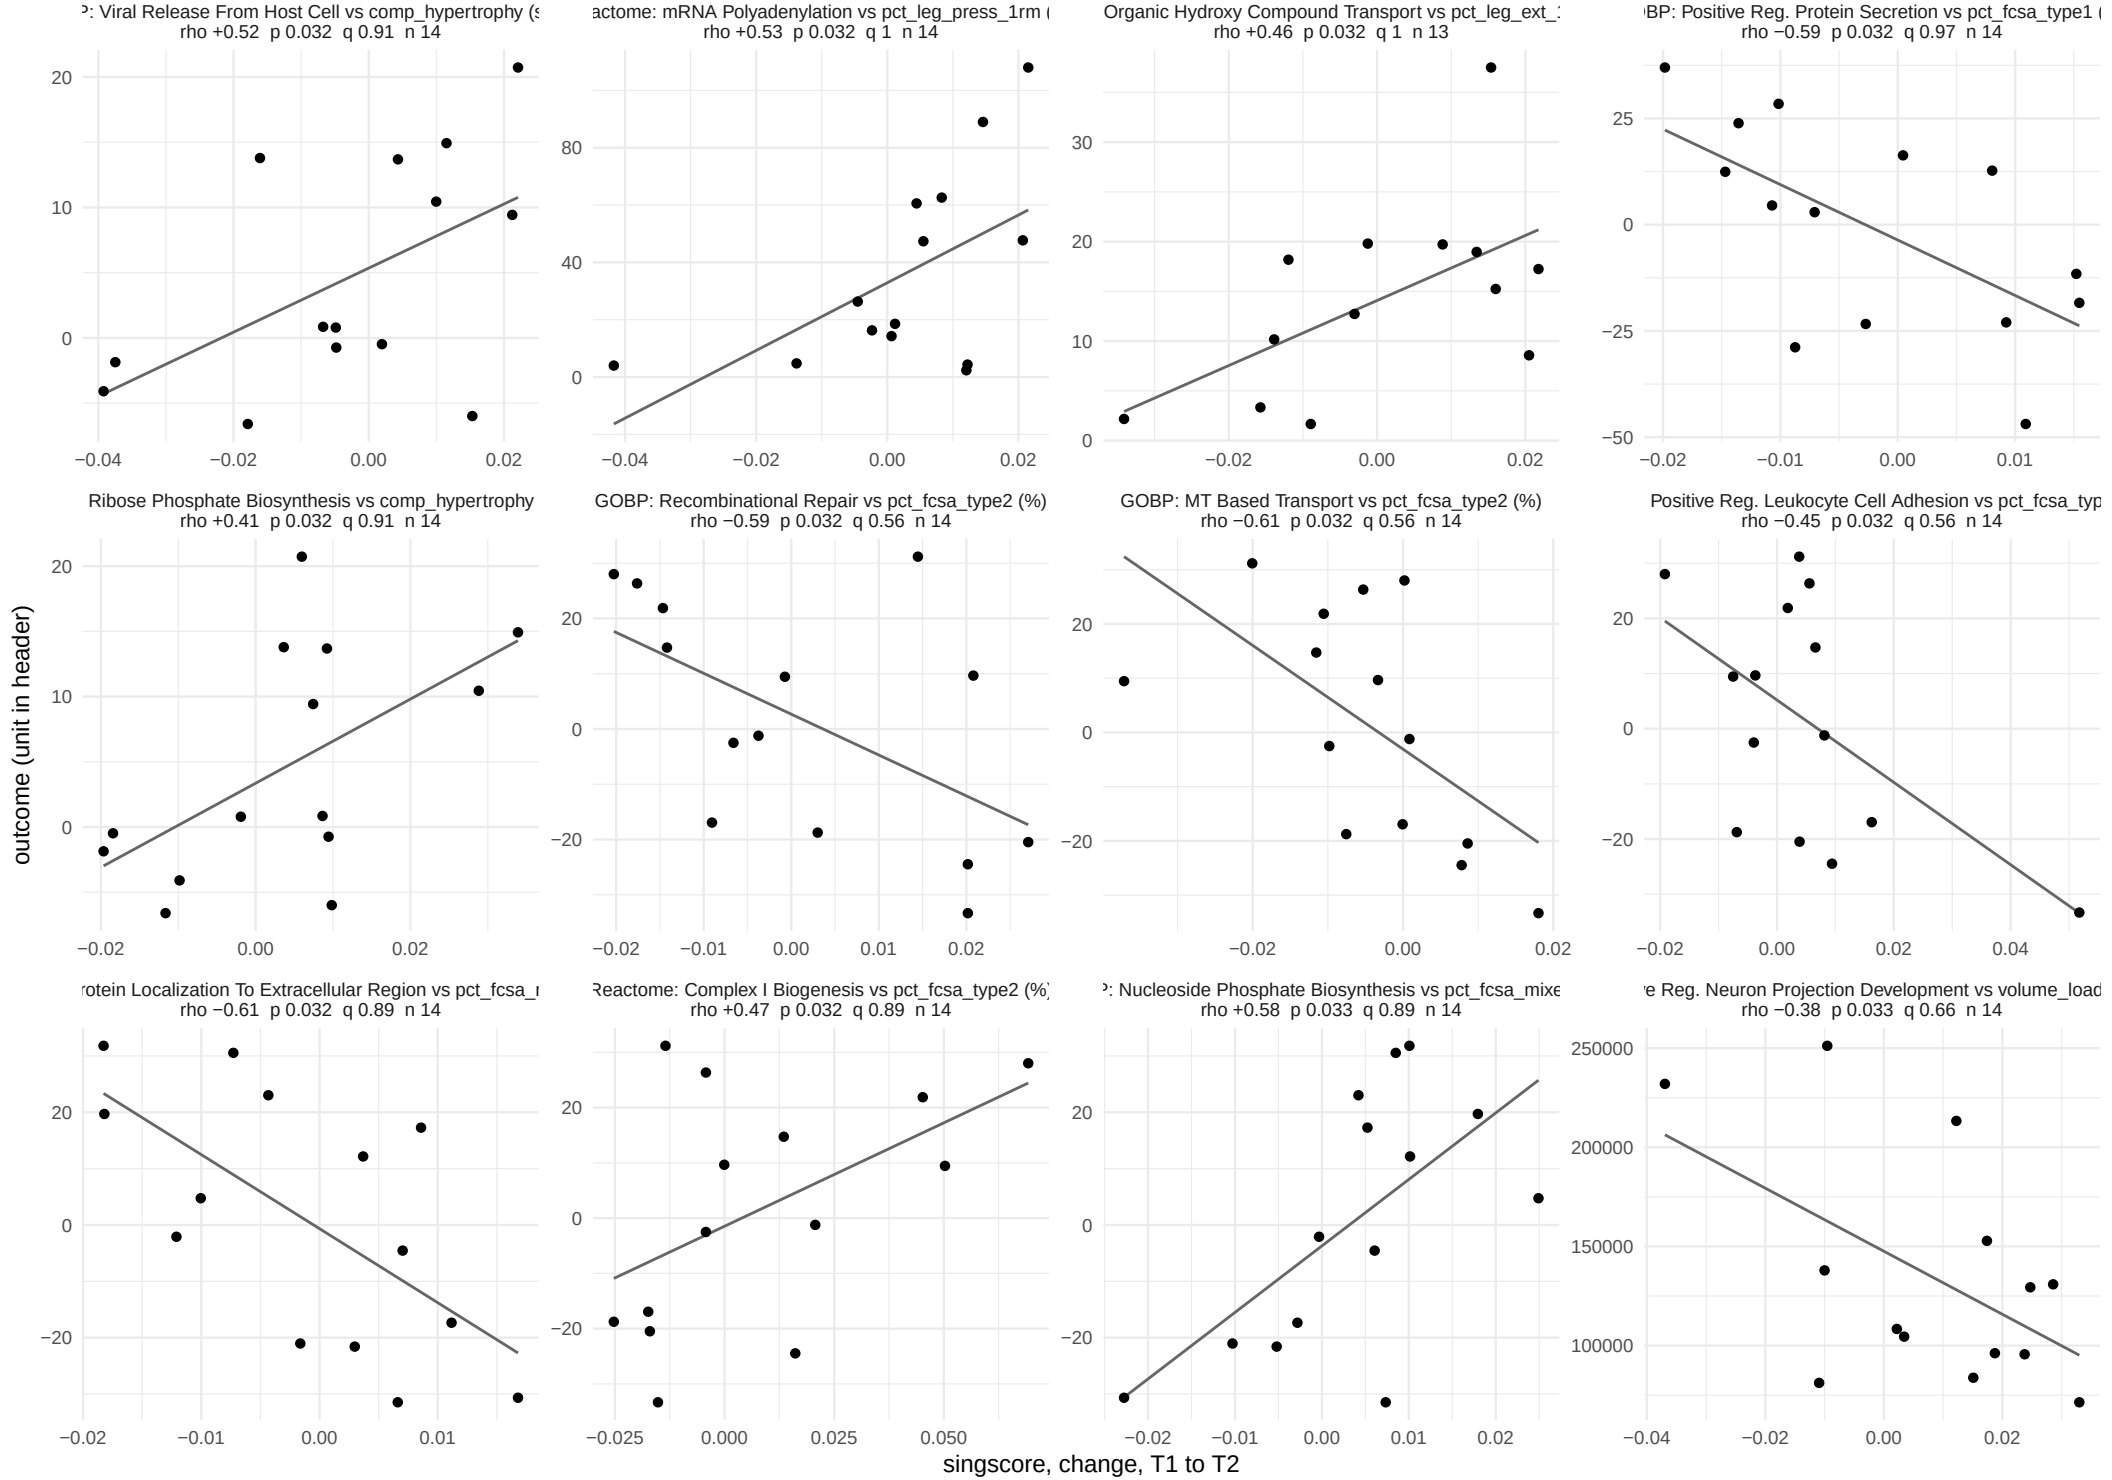

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, training window


413 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 20 of 35.

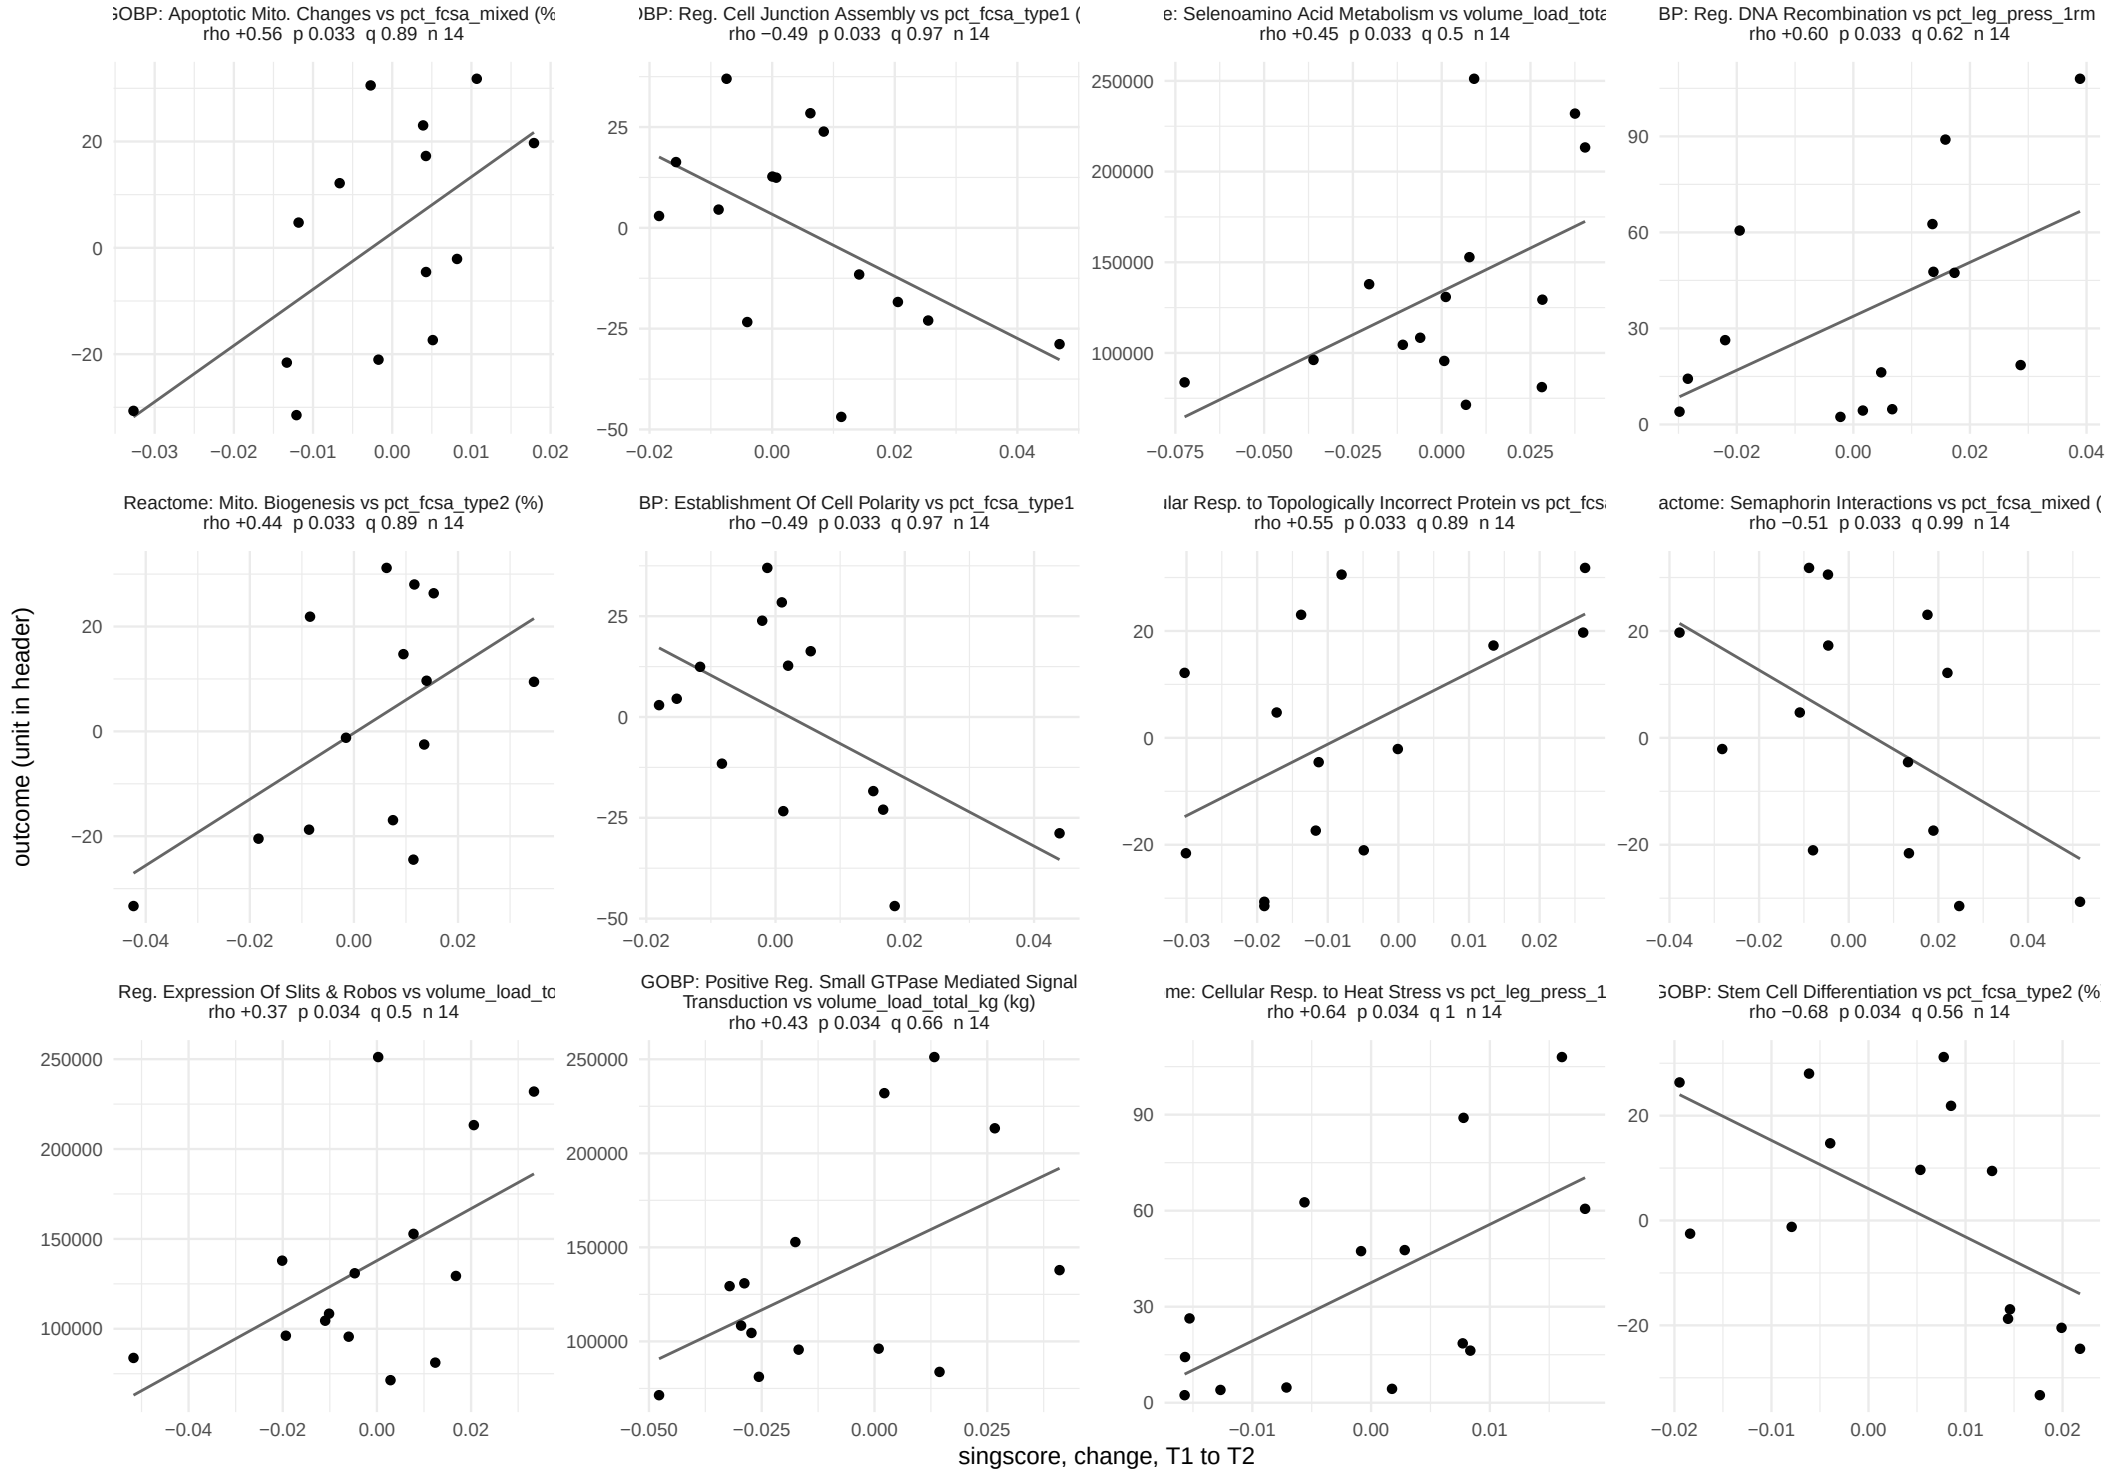

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, training window


413 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 21 of 35.

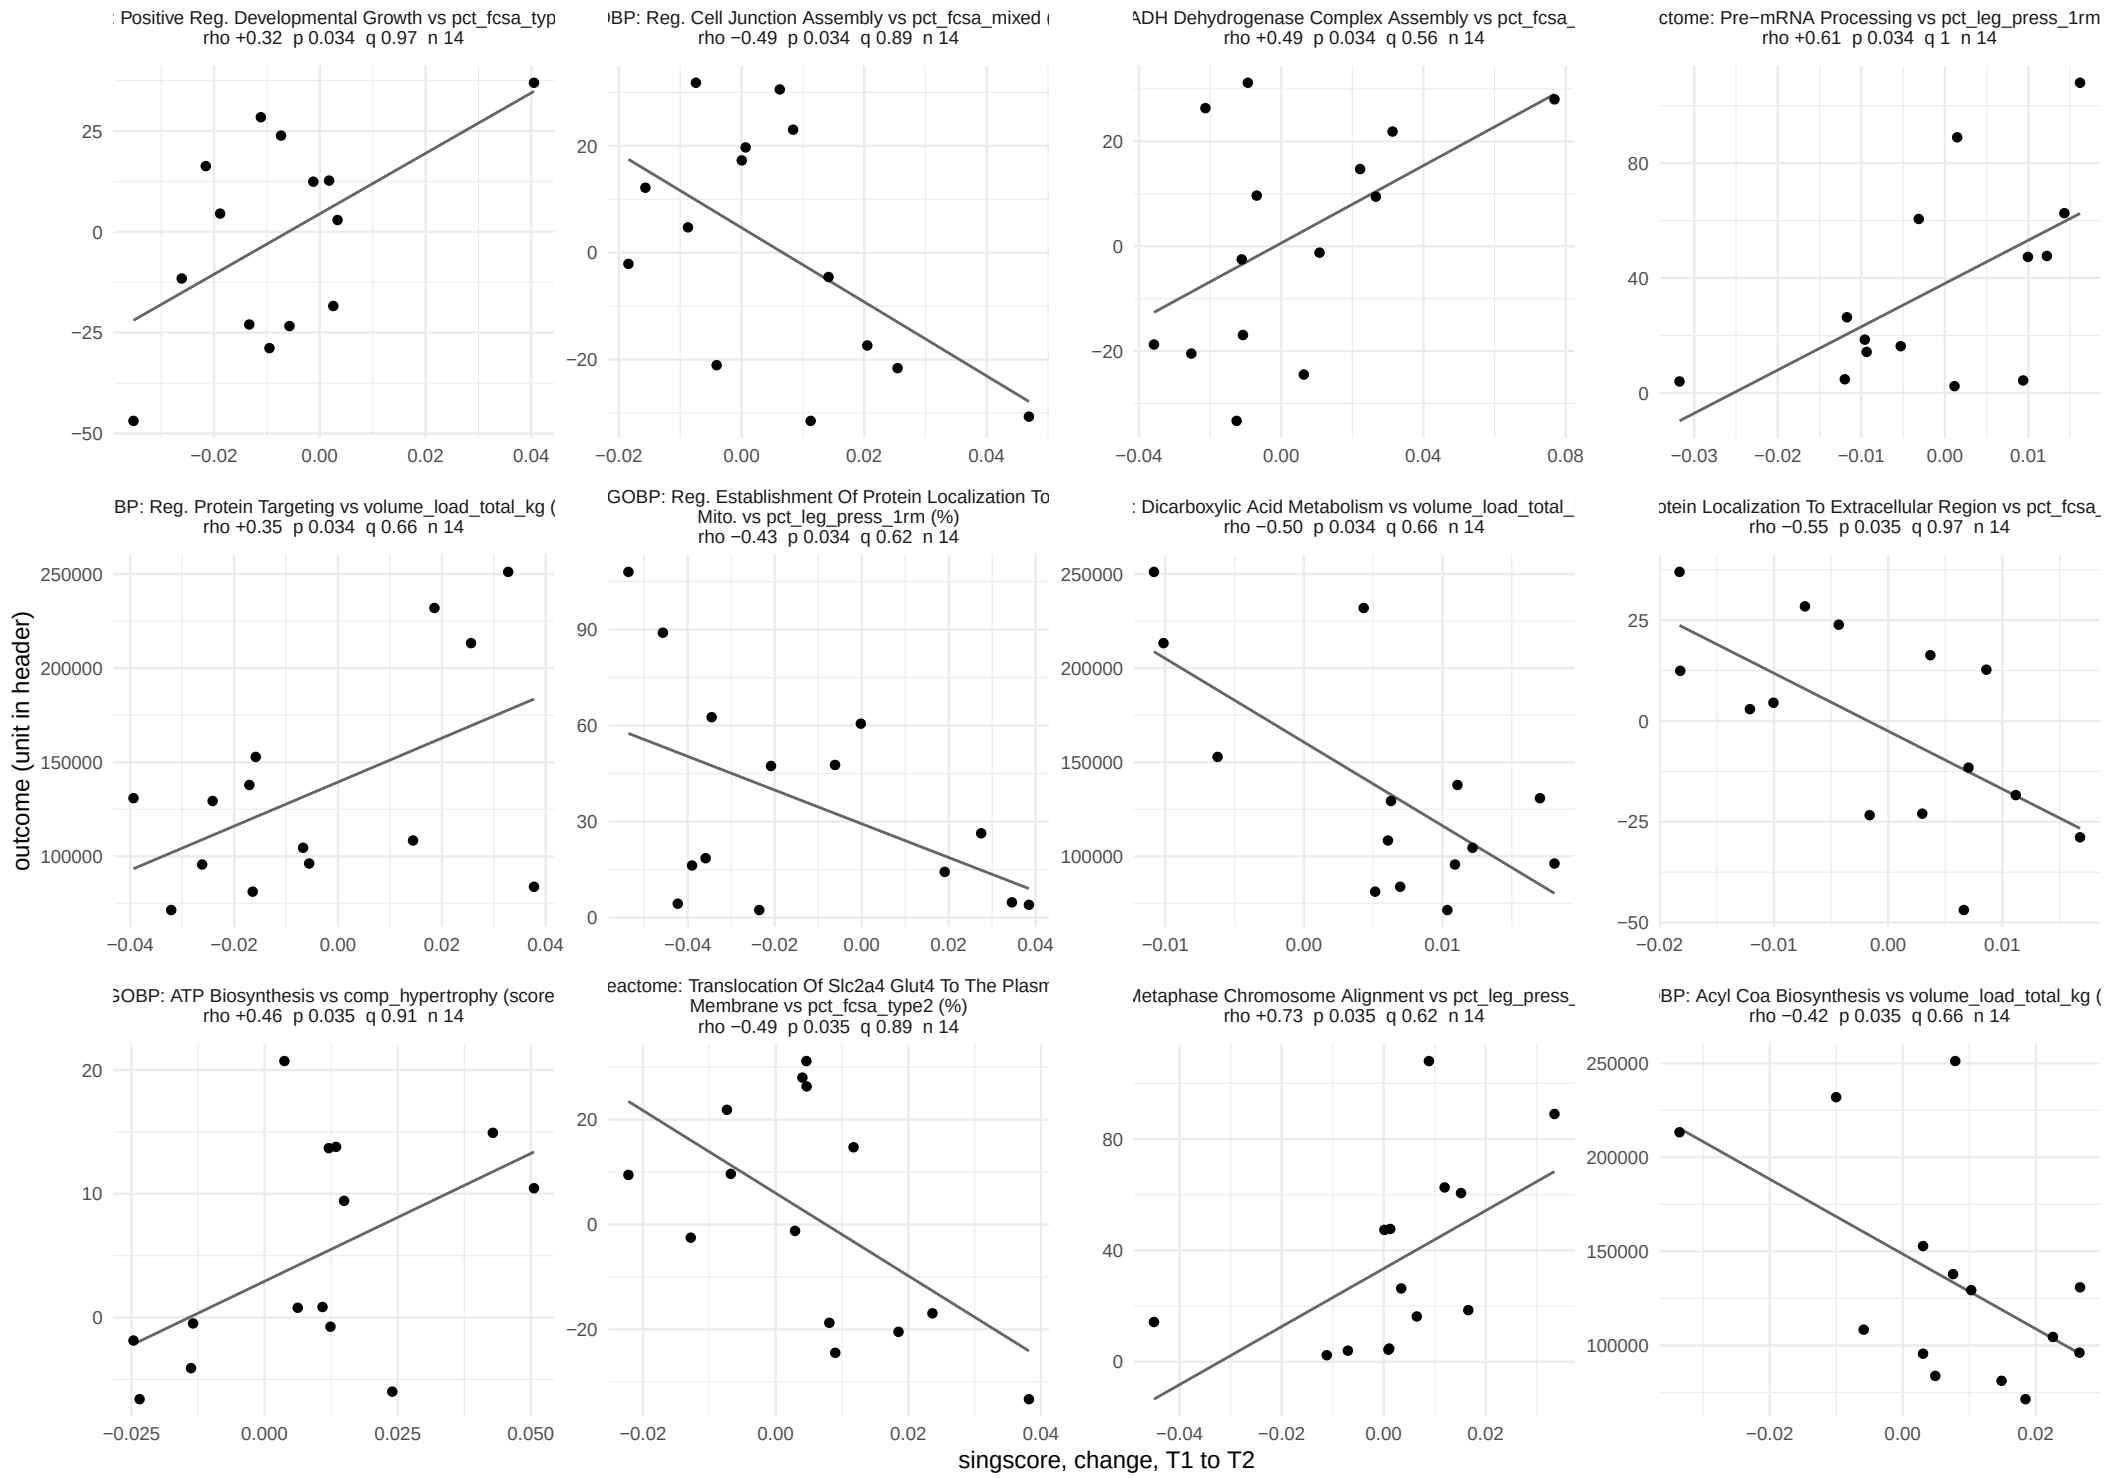

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, training window


413 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 22 of 35.

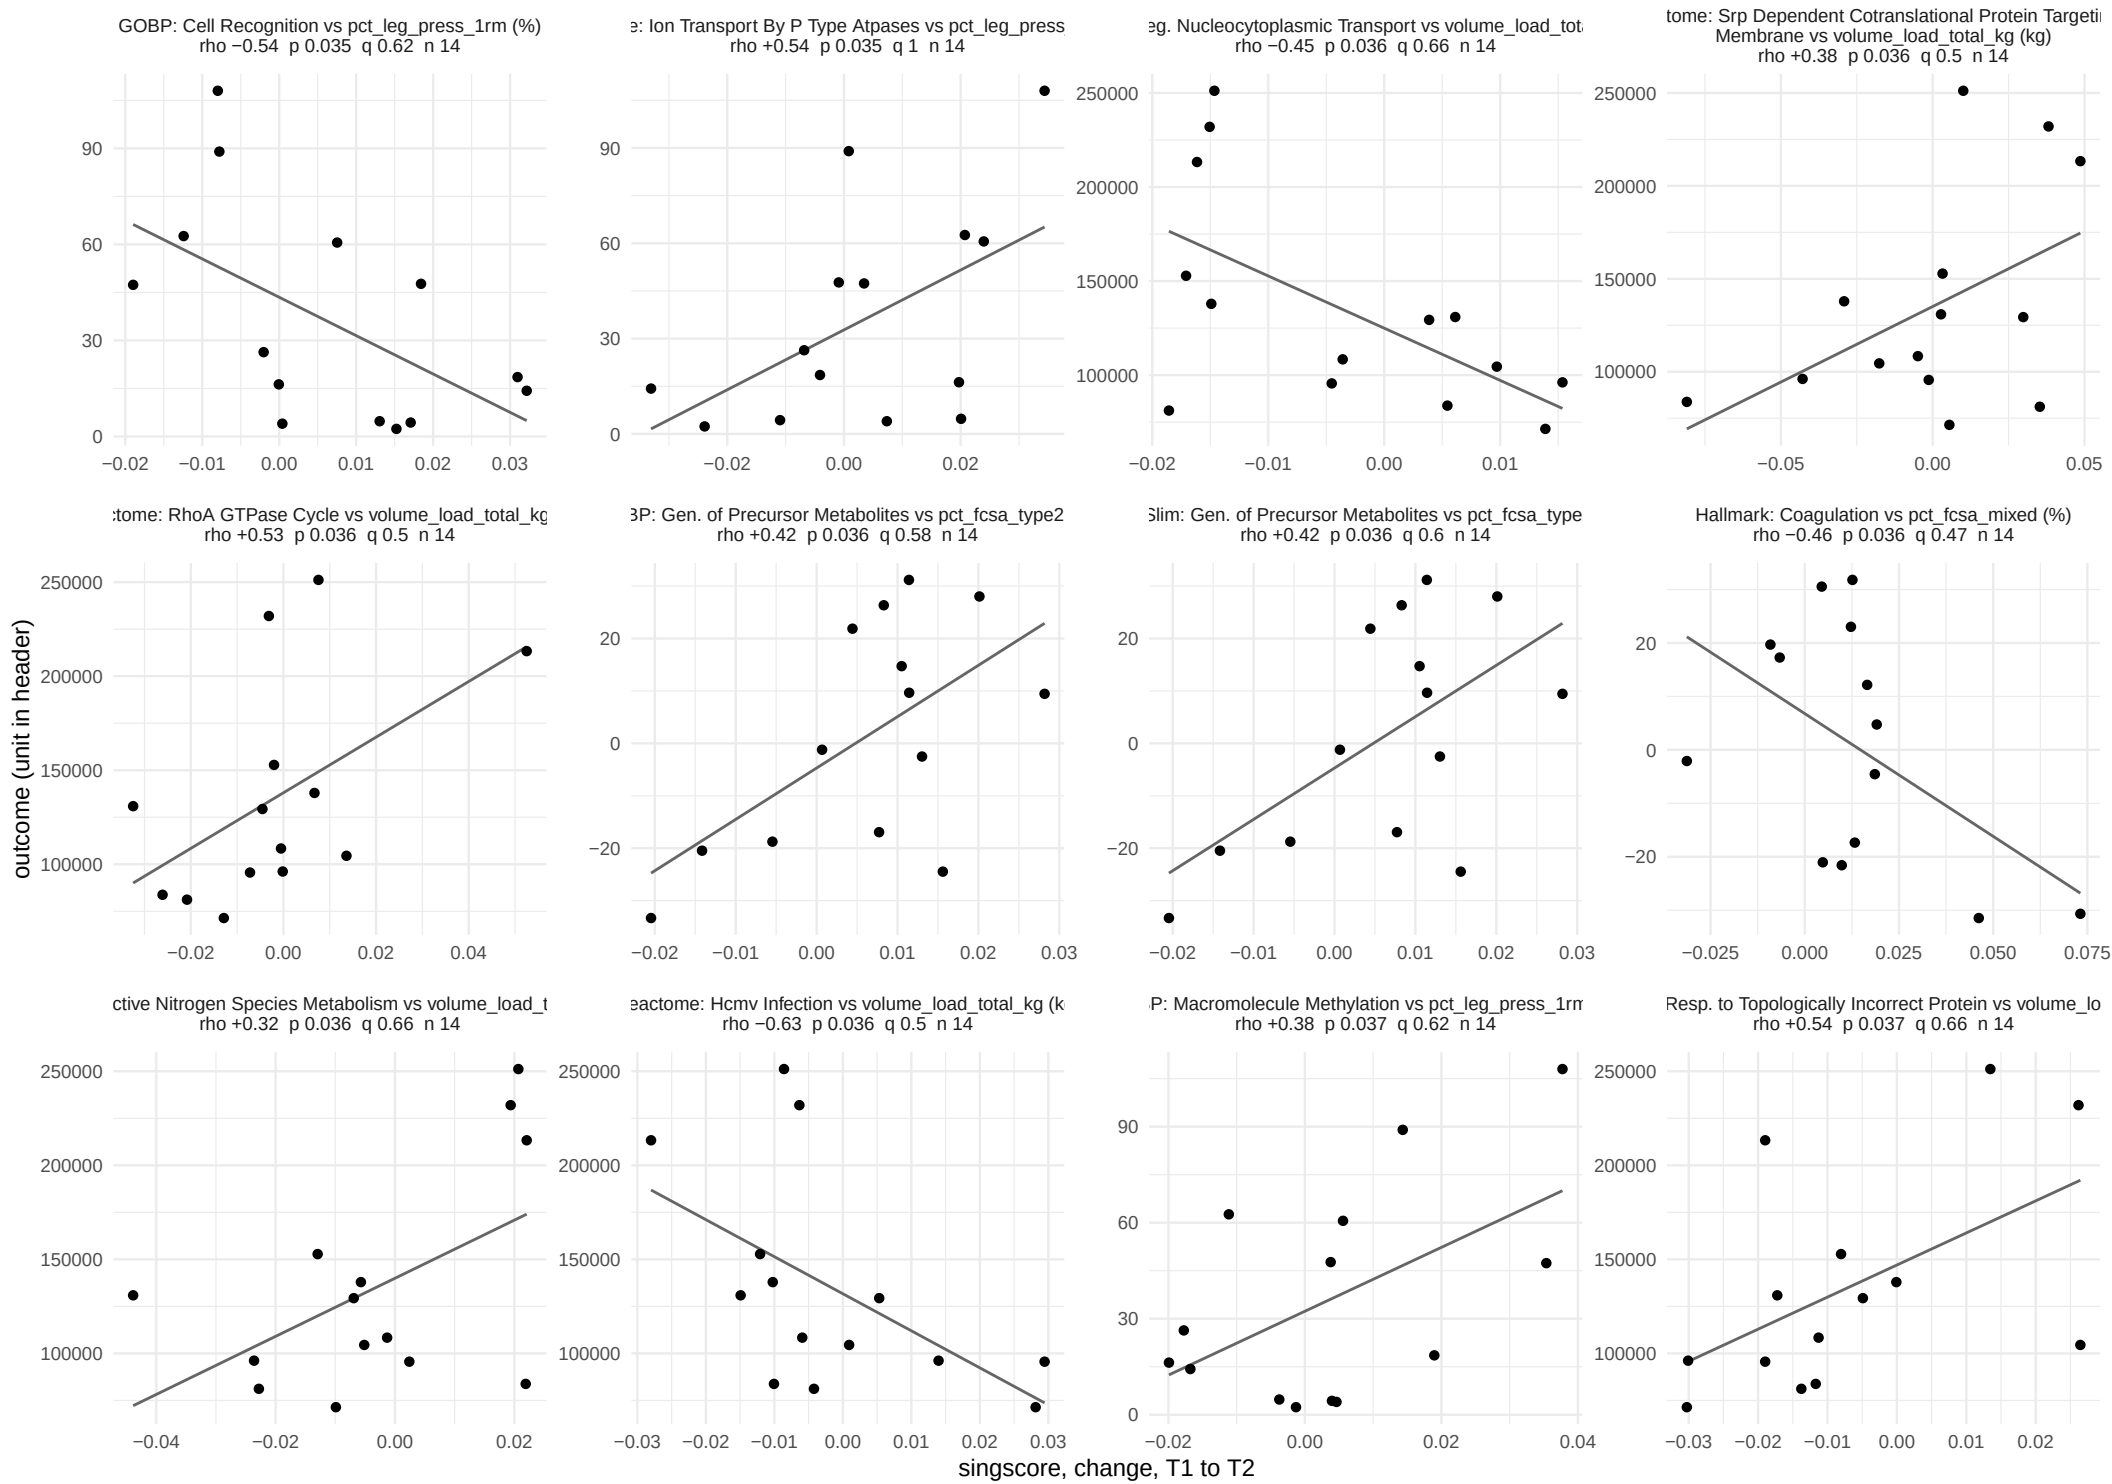

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, training window


413 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 23 of 35.

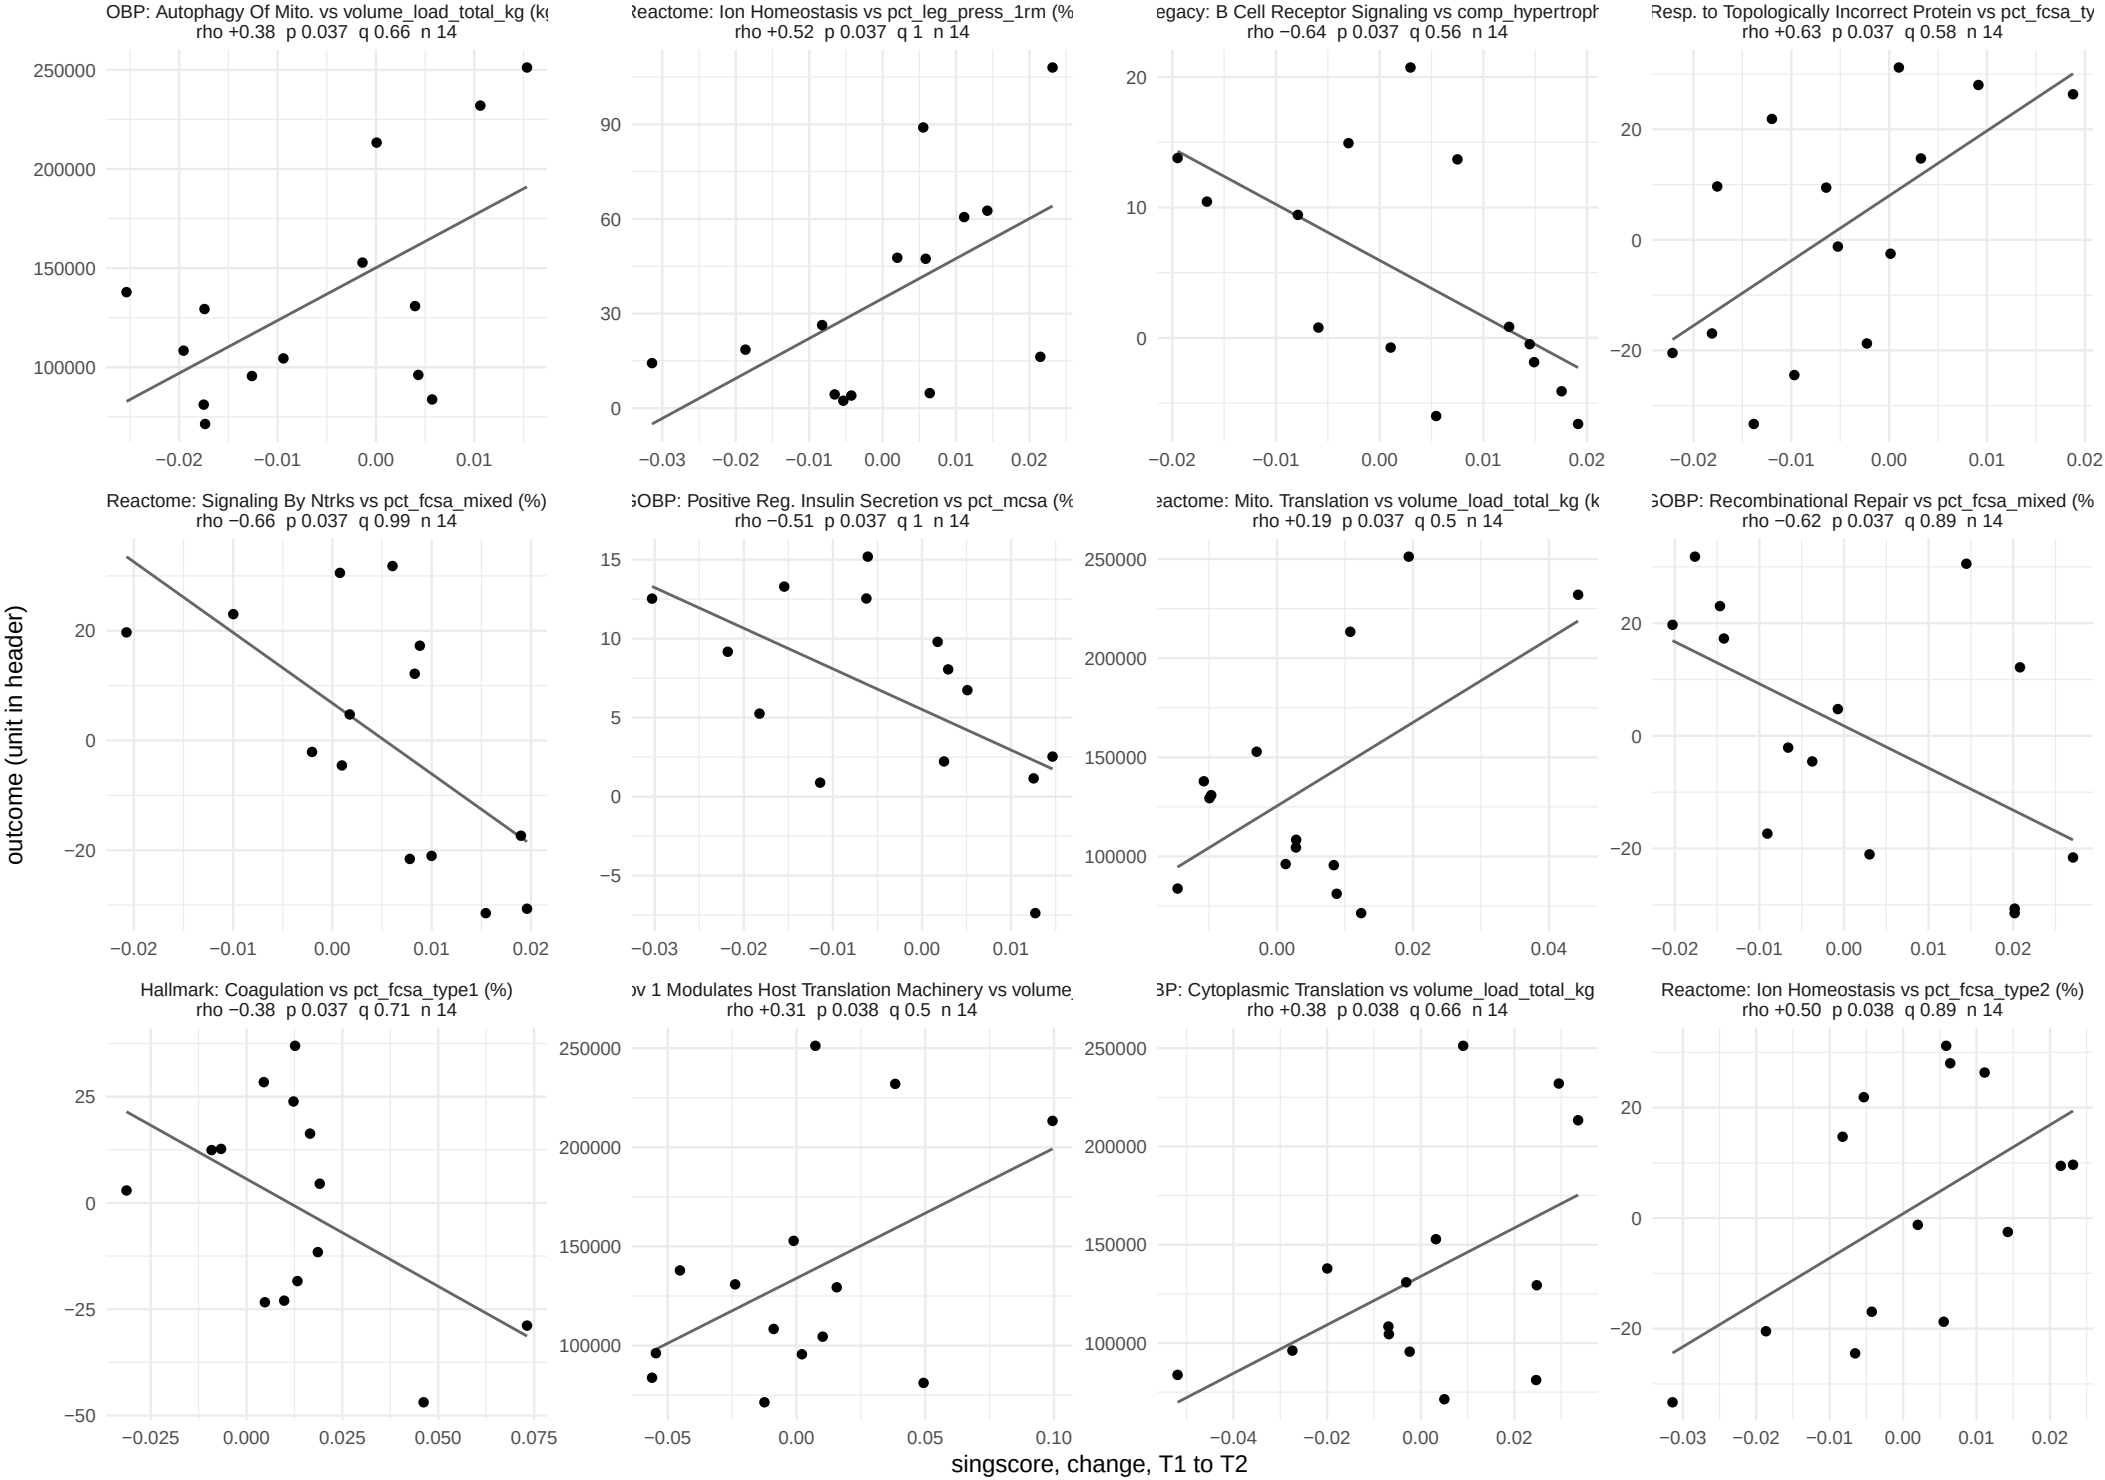

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, training window


413 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 24 of 35.

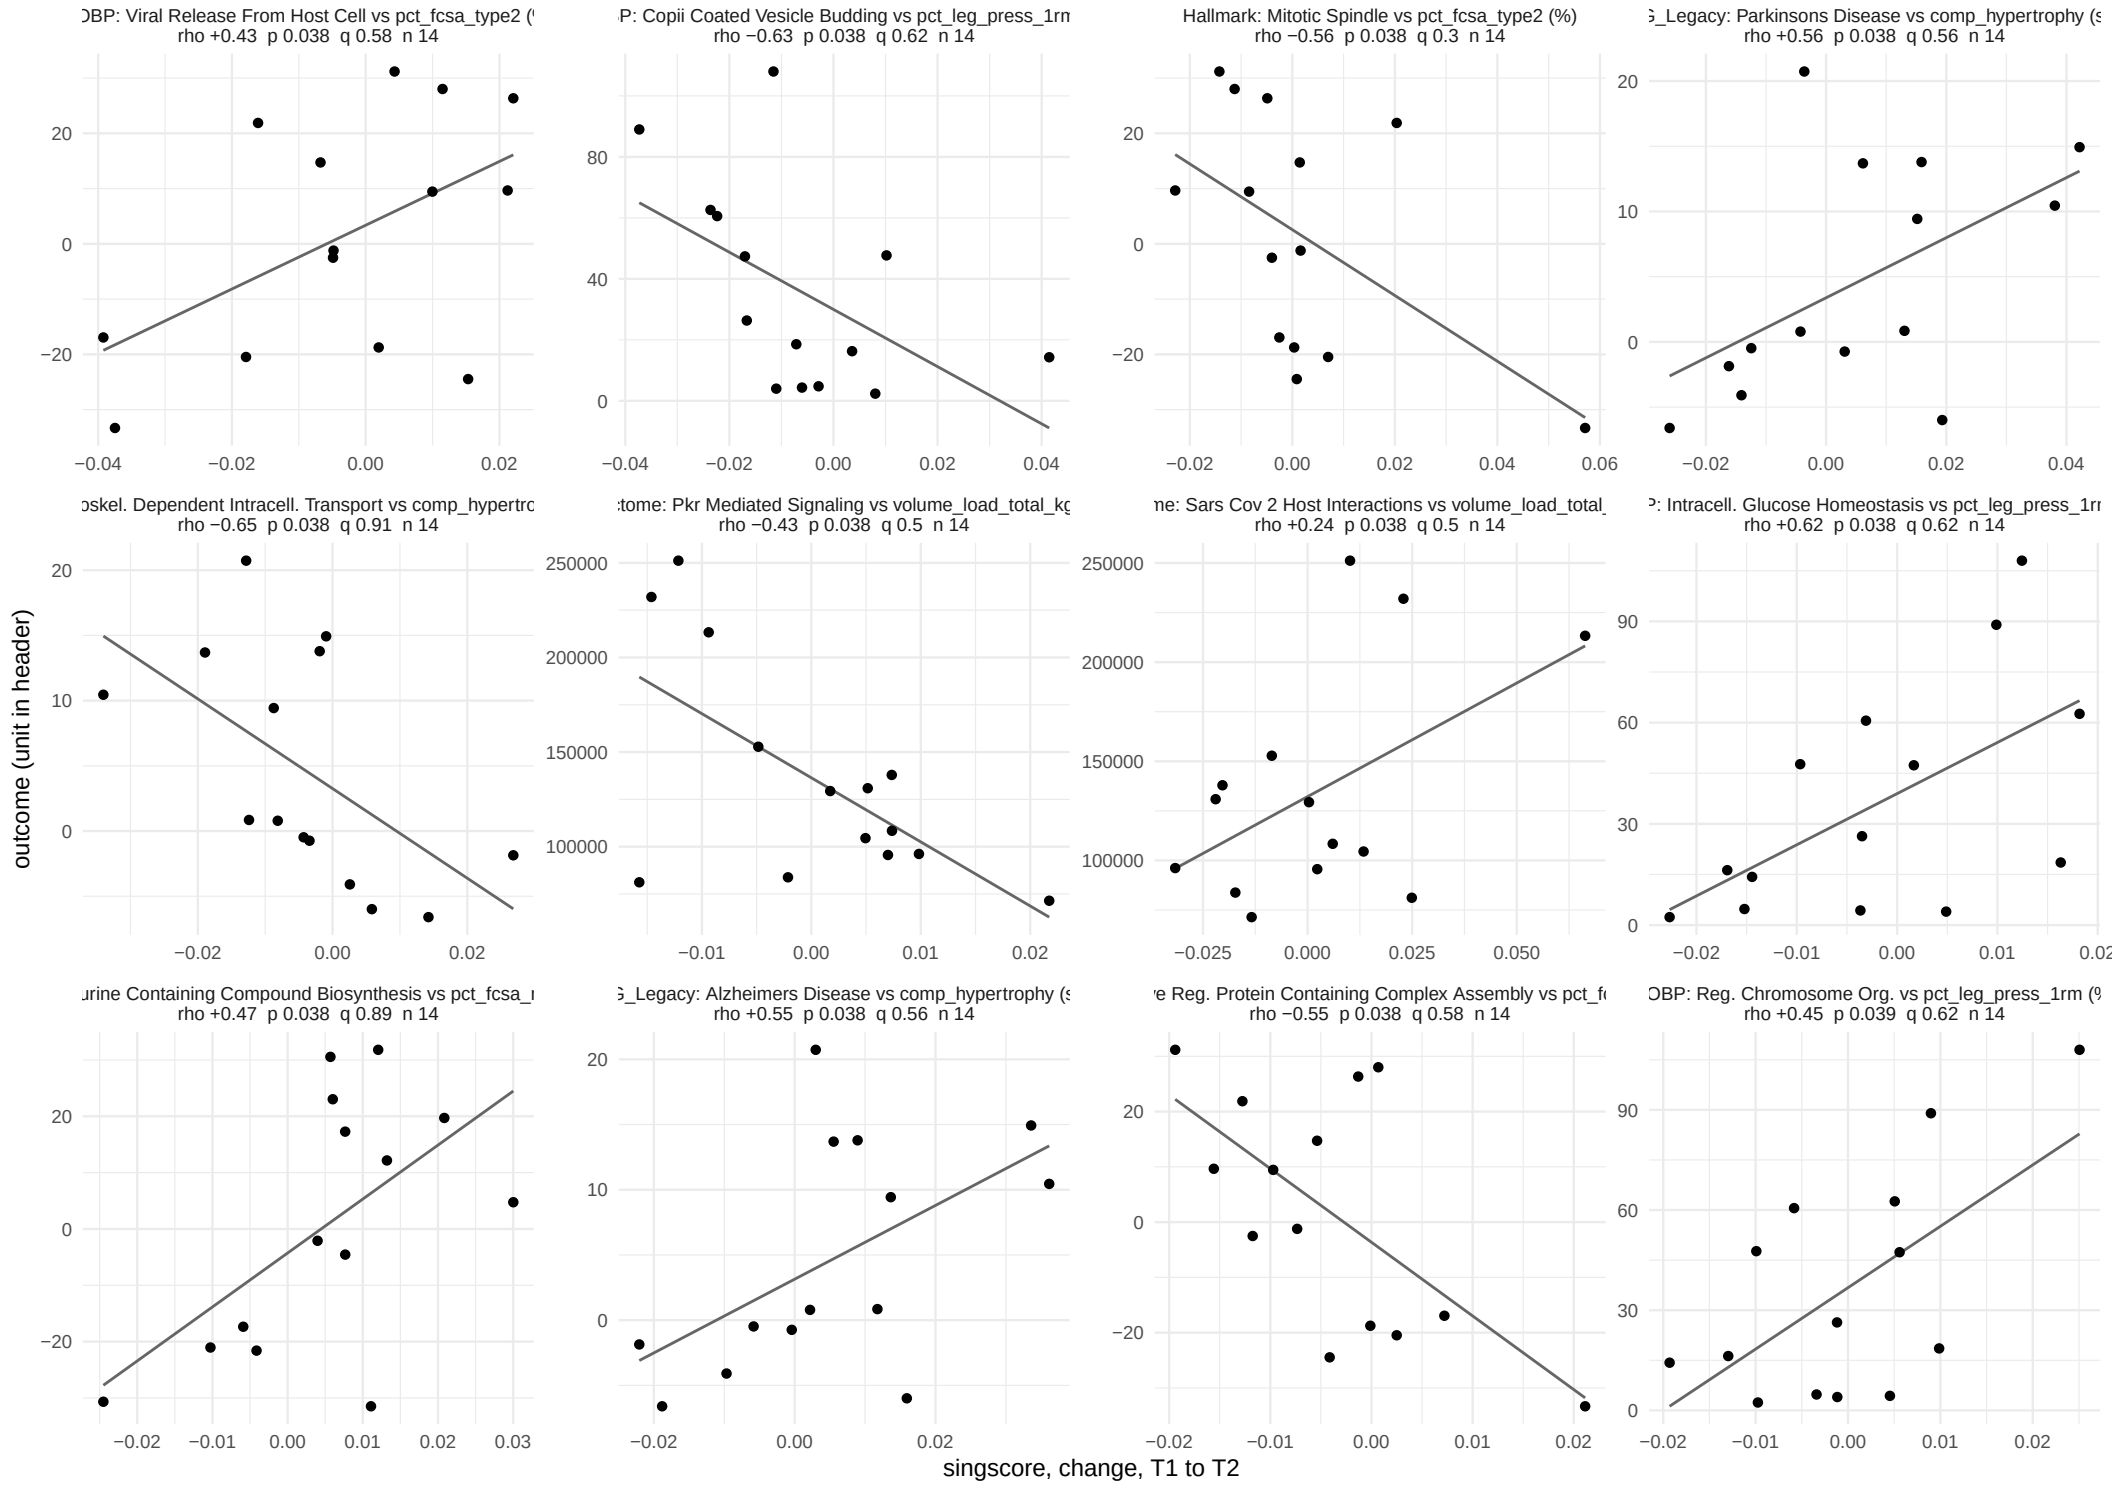

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, training window


413 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 25 of 35.

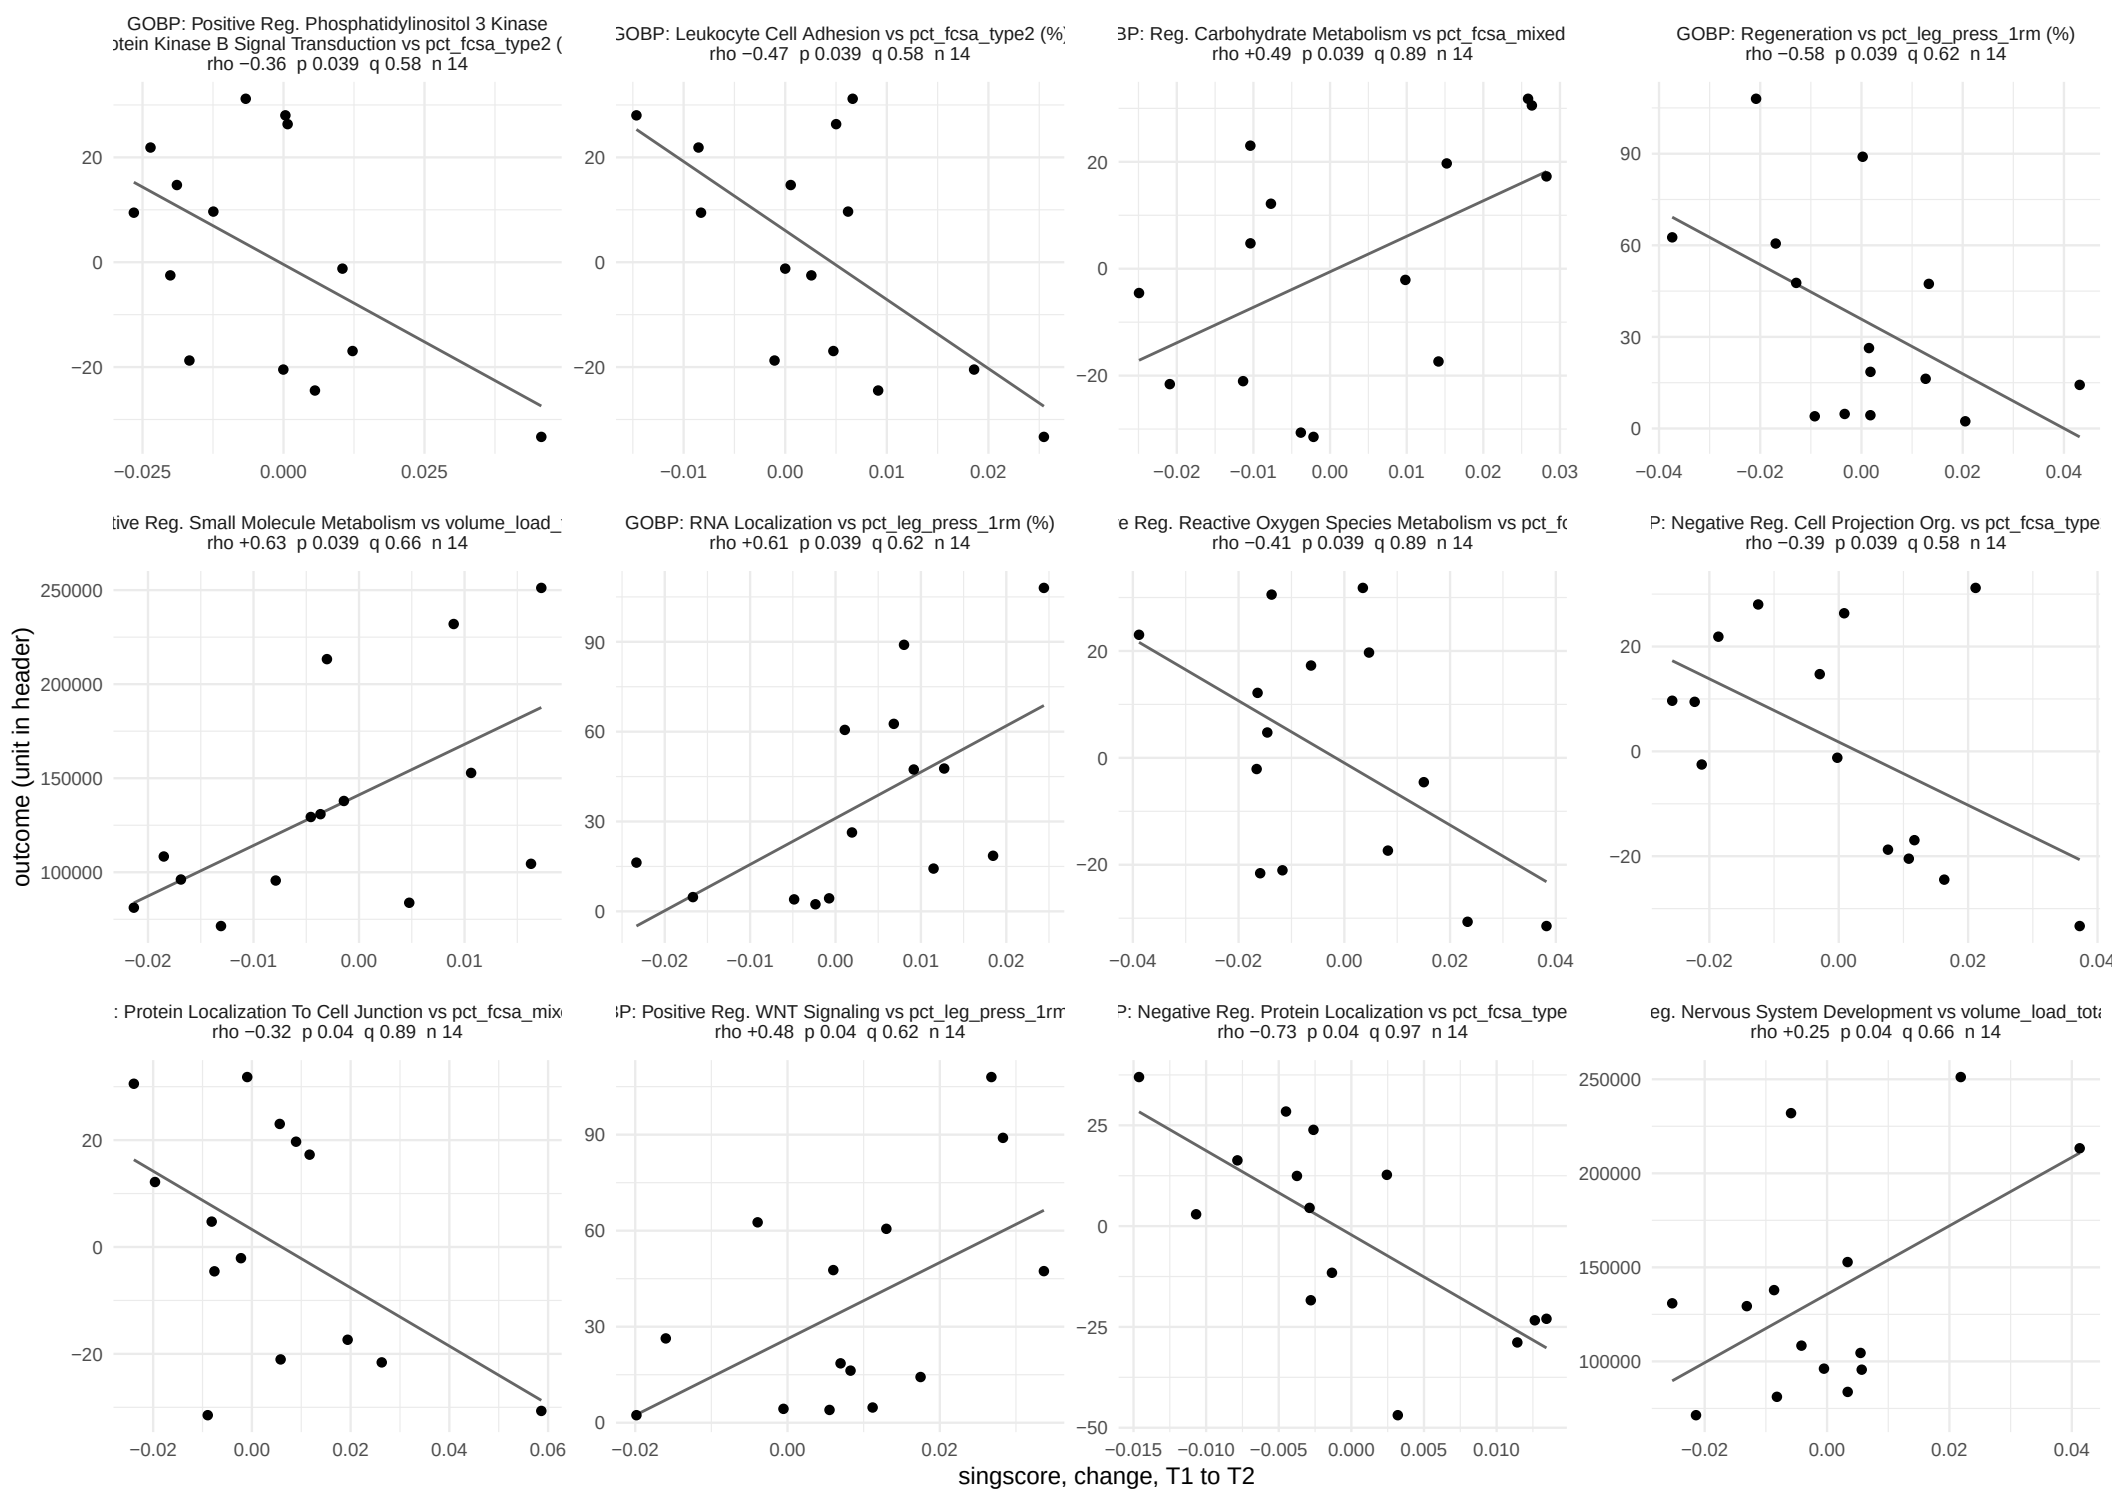

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, training window


413 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 26 of 35.

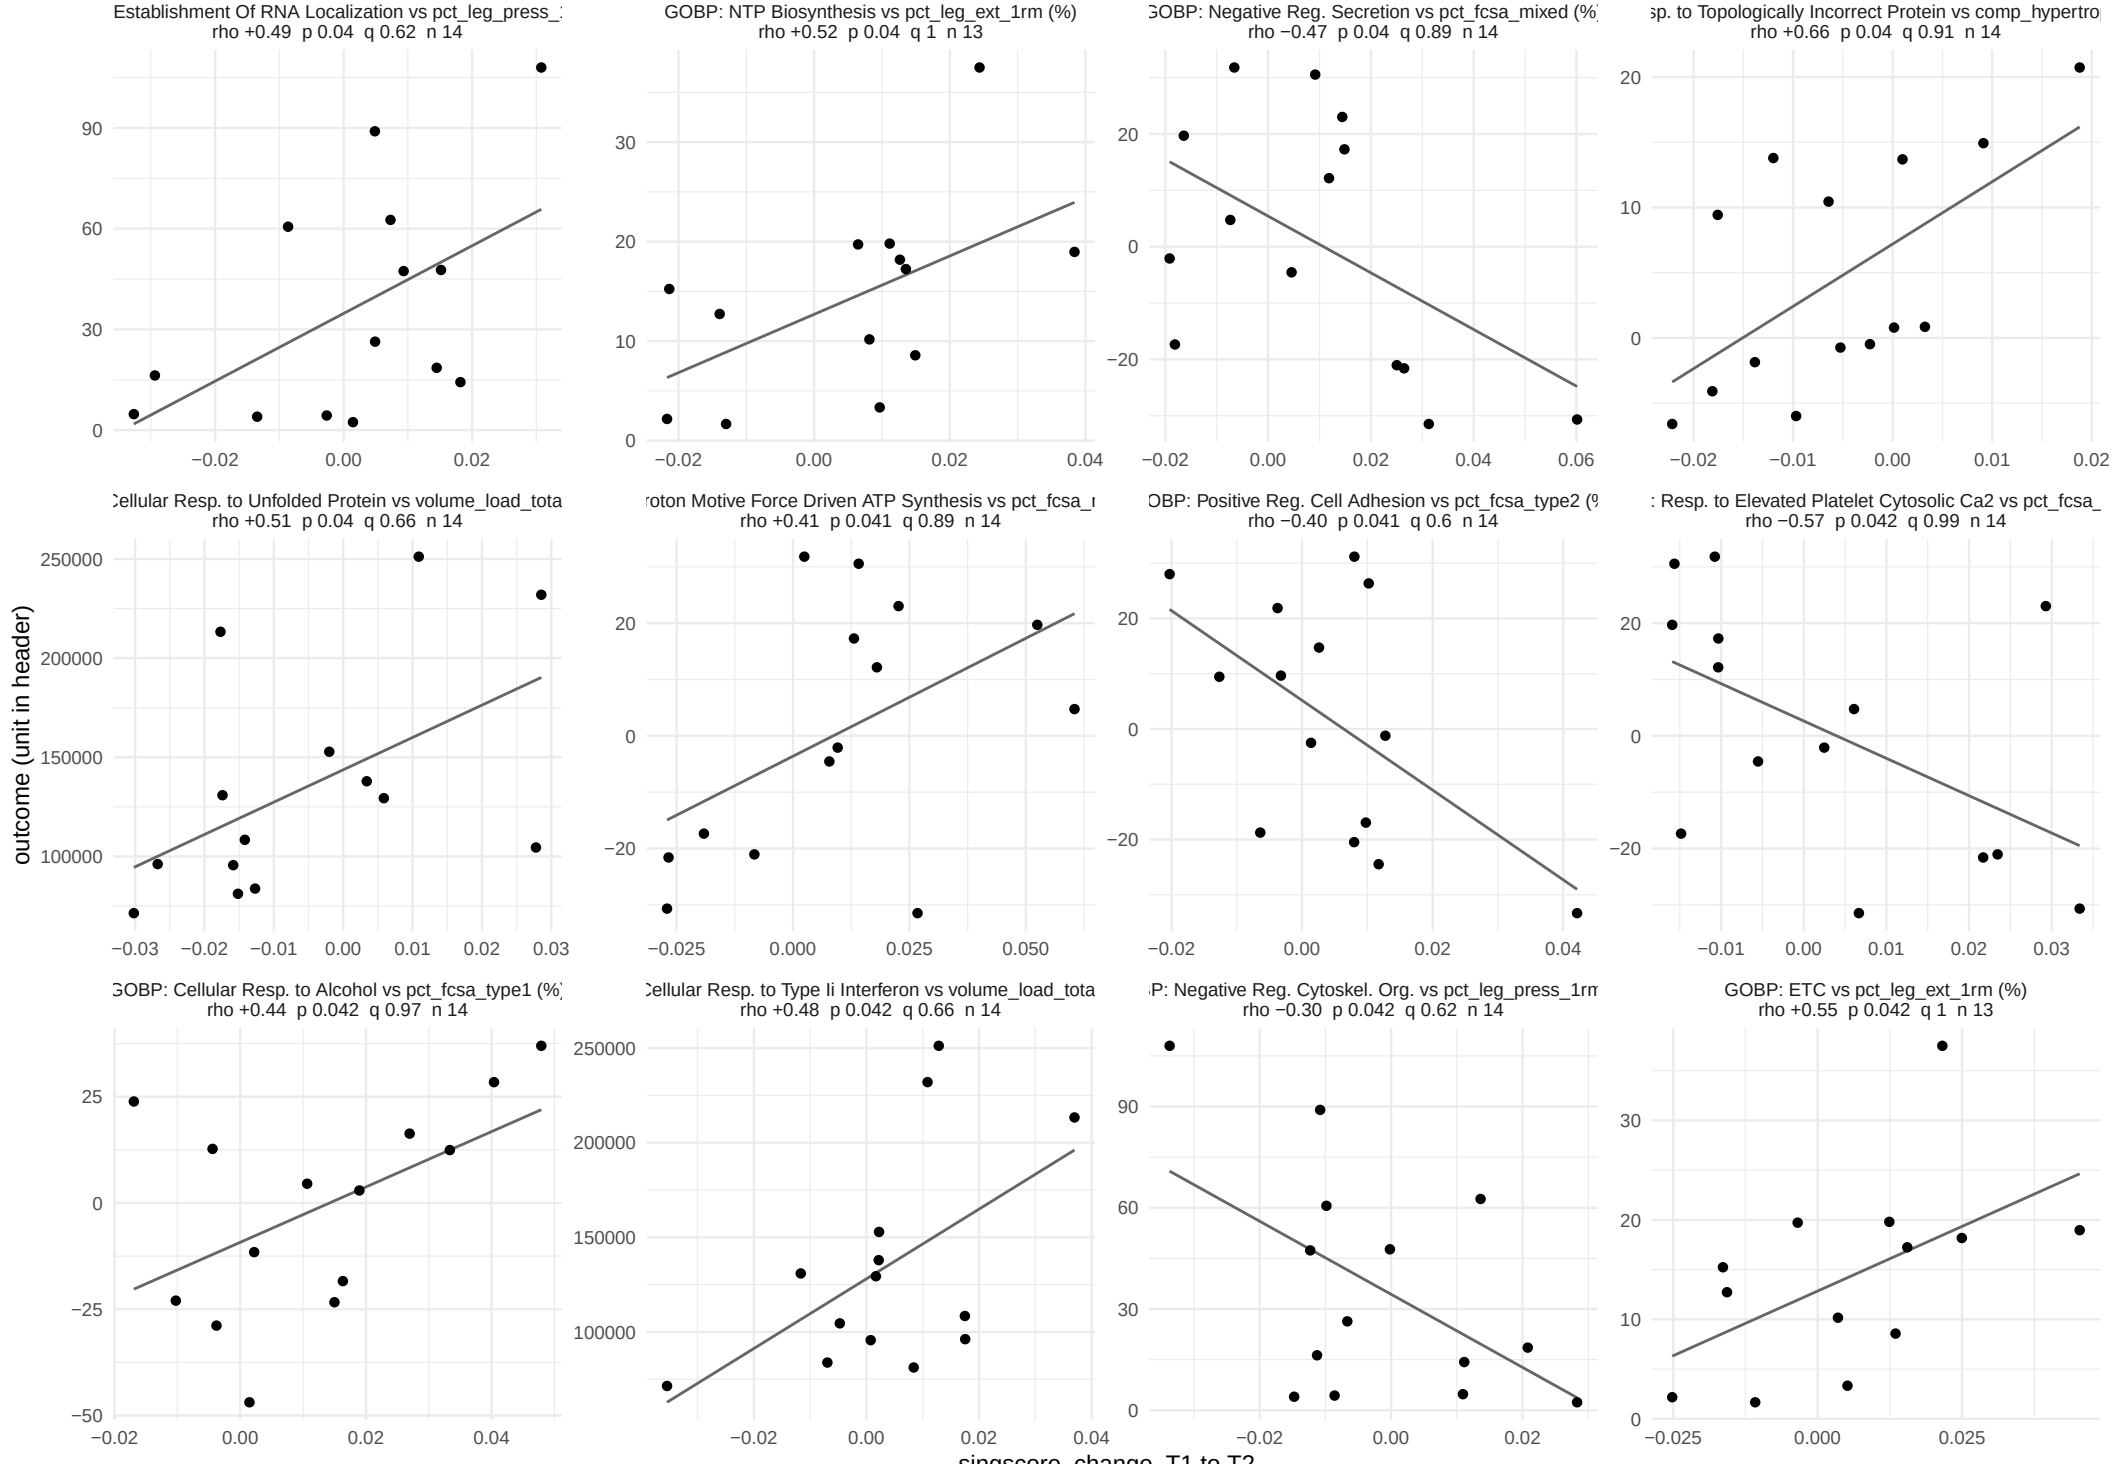

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, training window


413 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 27 of 35.

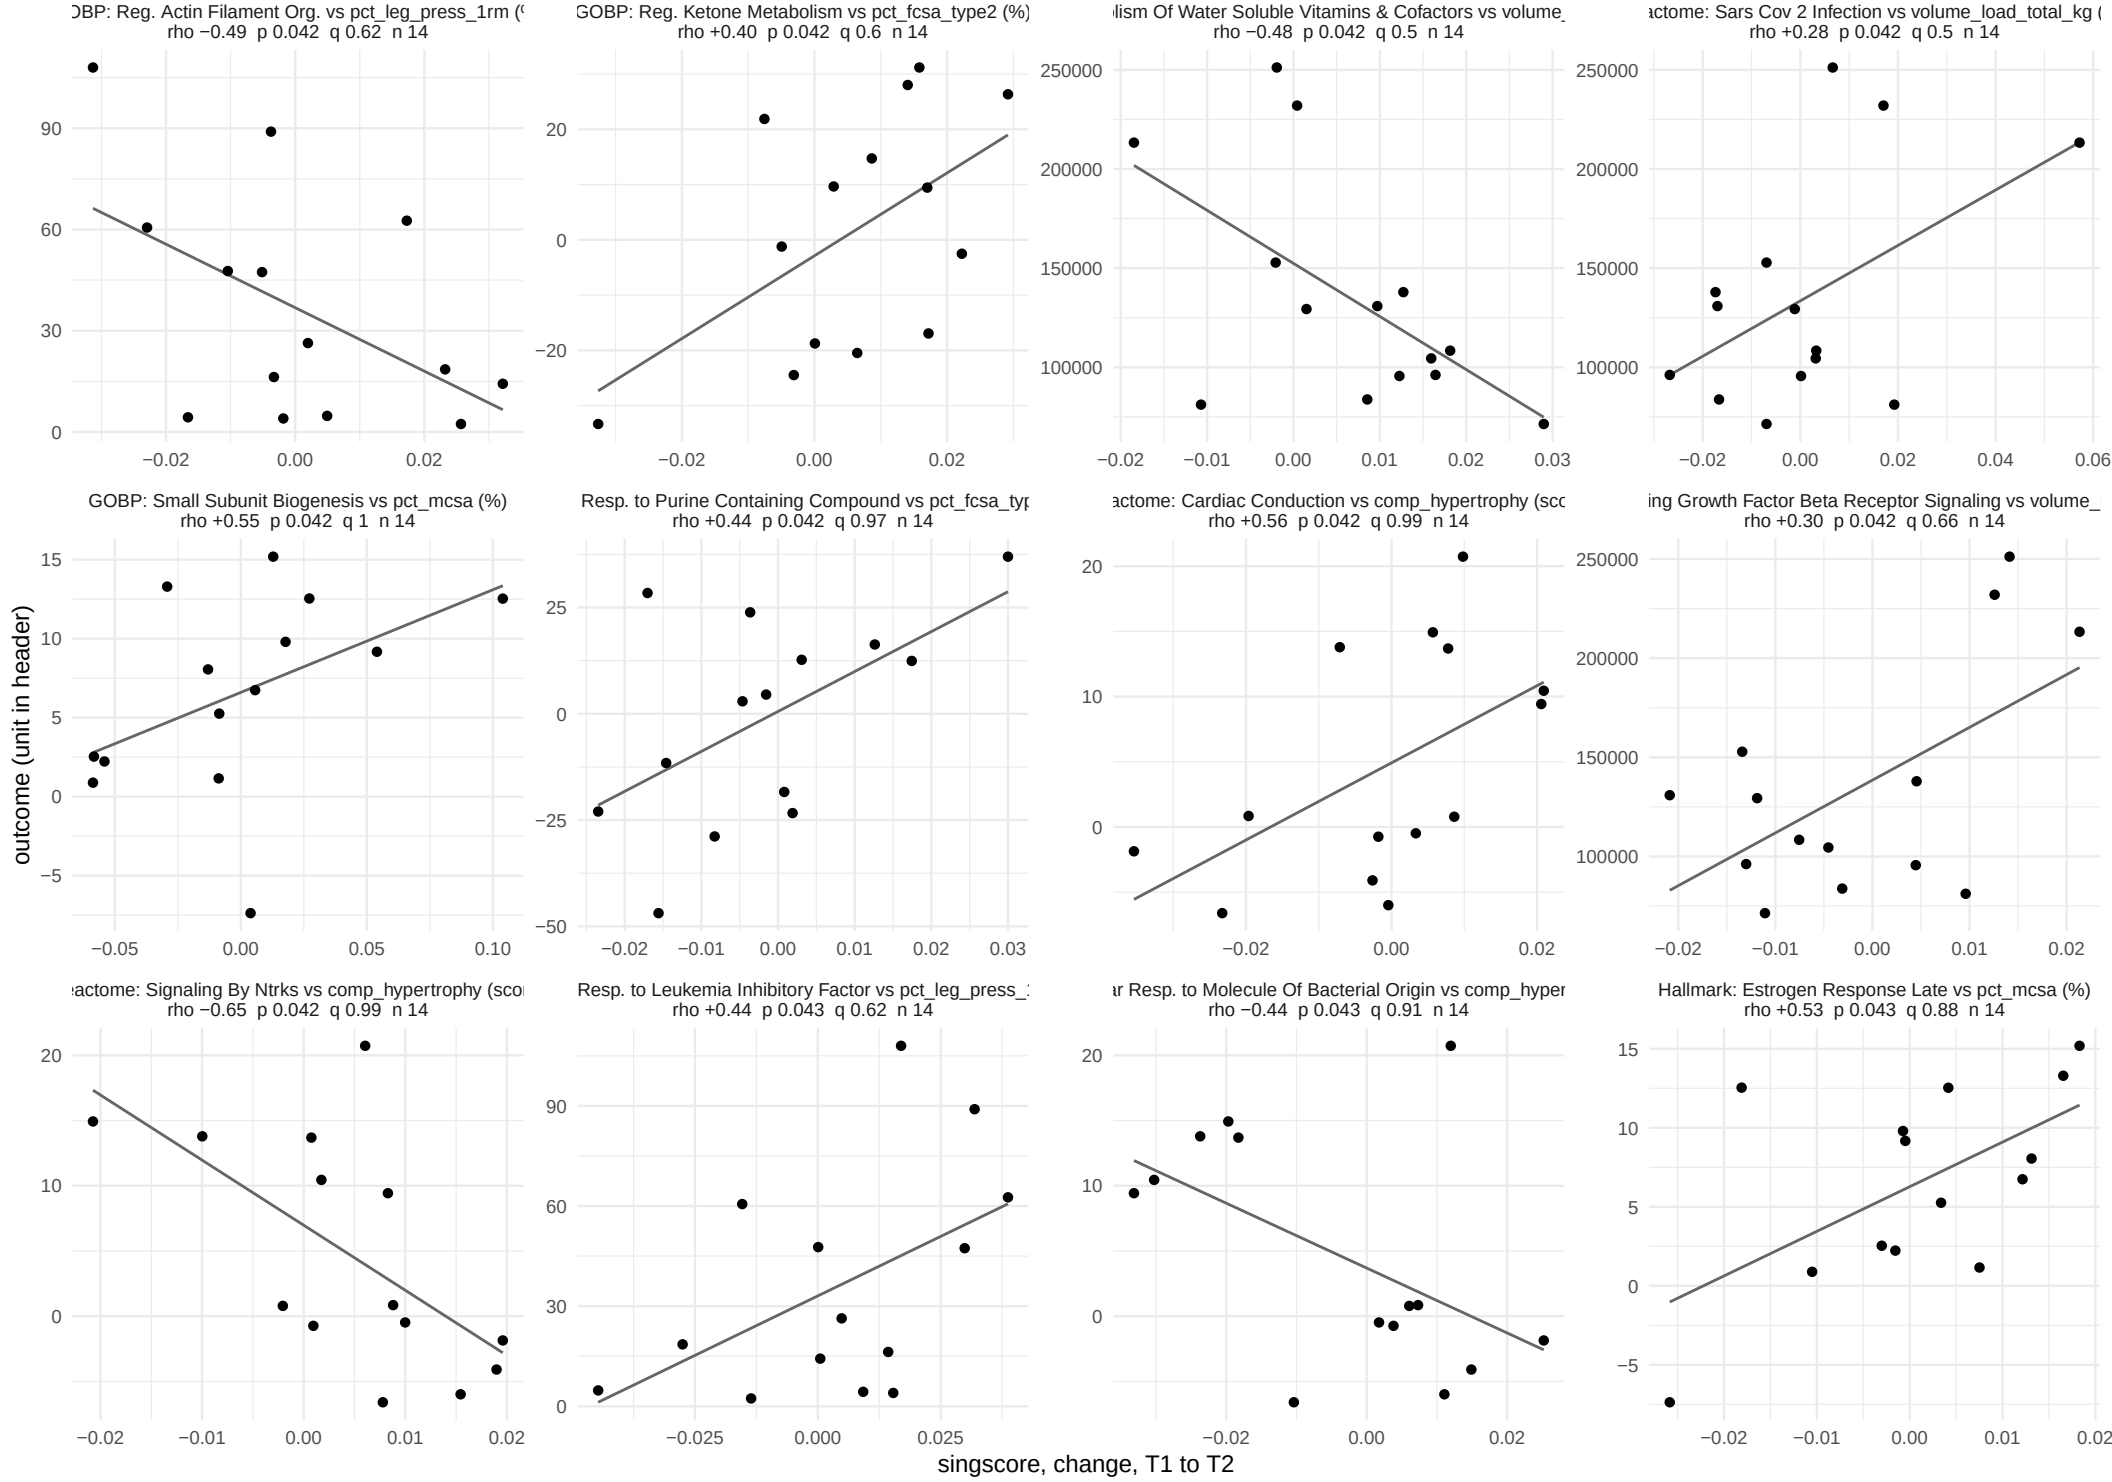

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, training window


413 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 28 of 35.

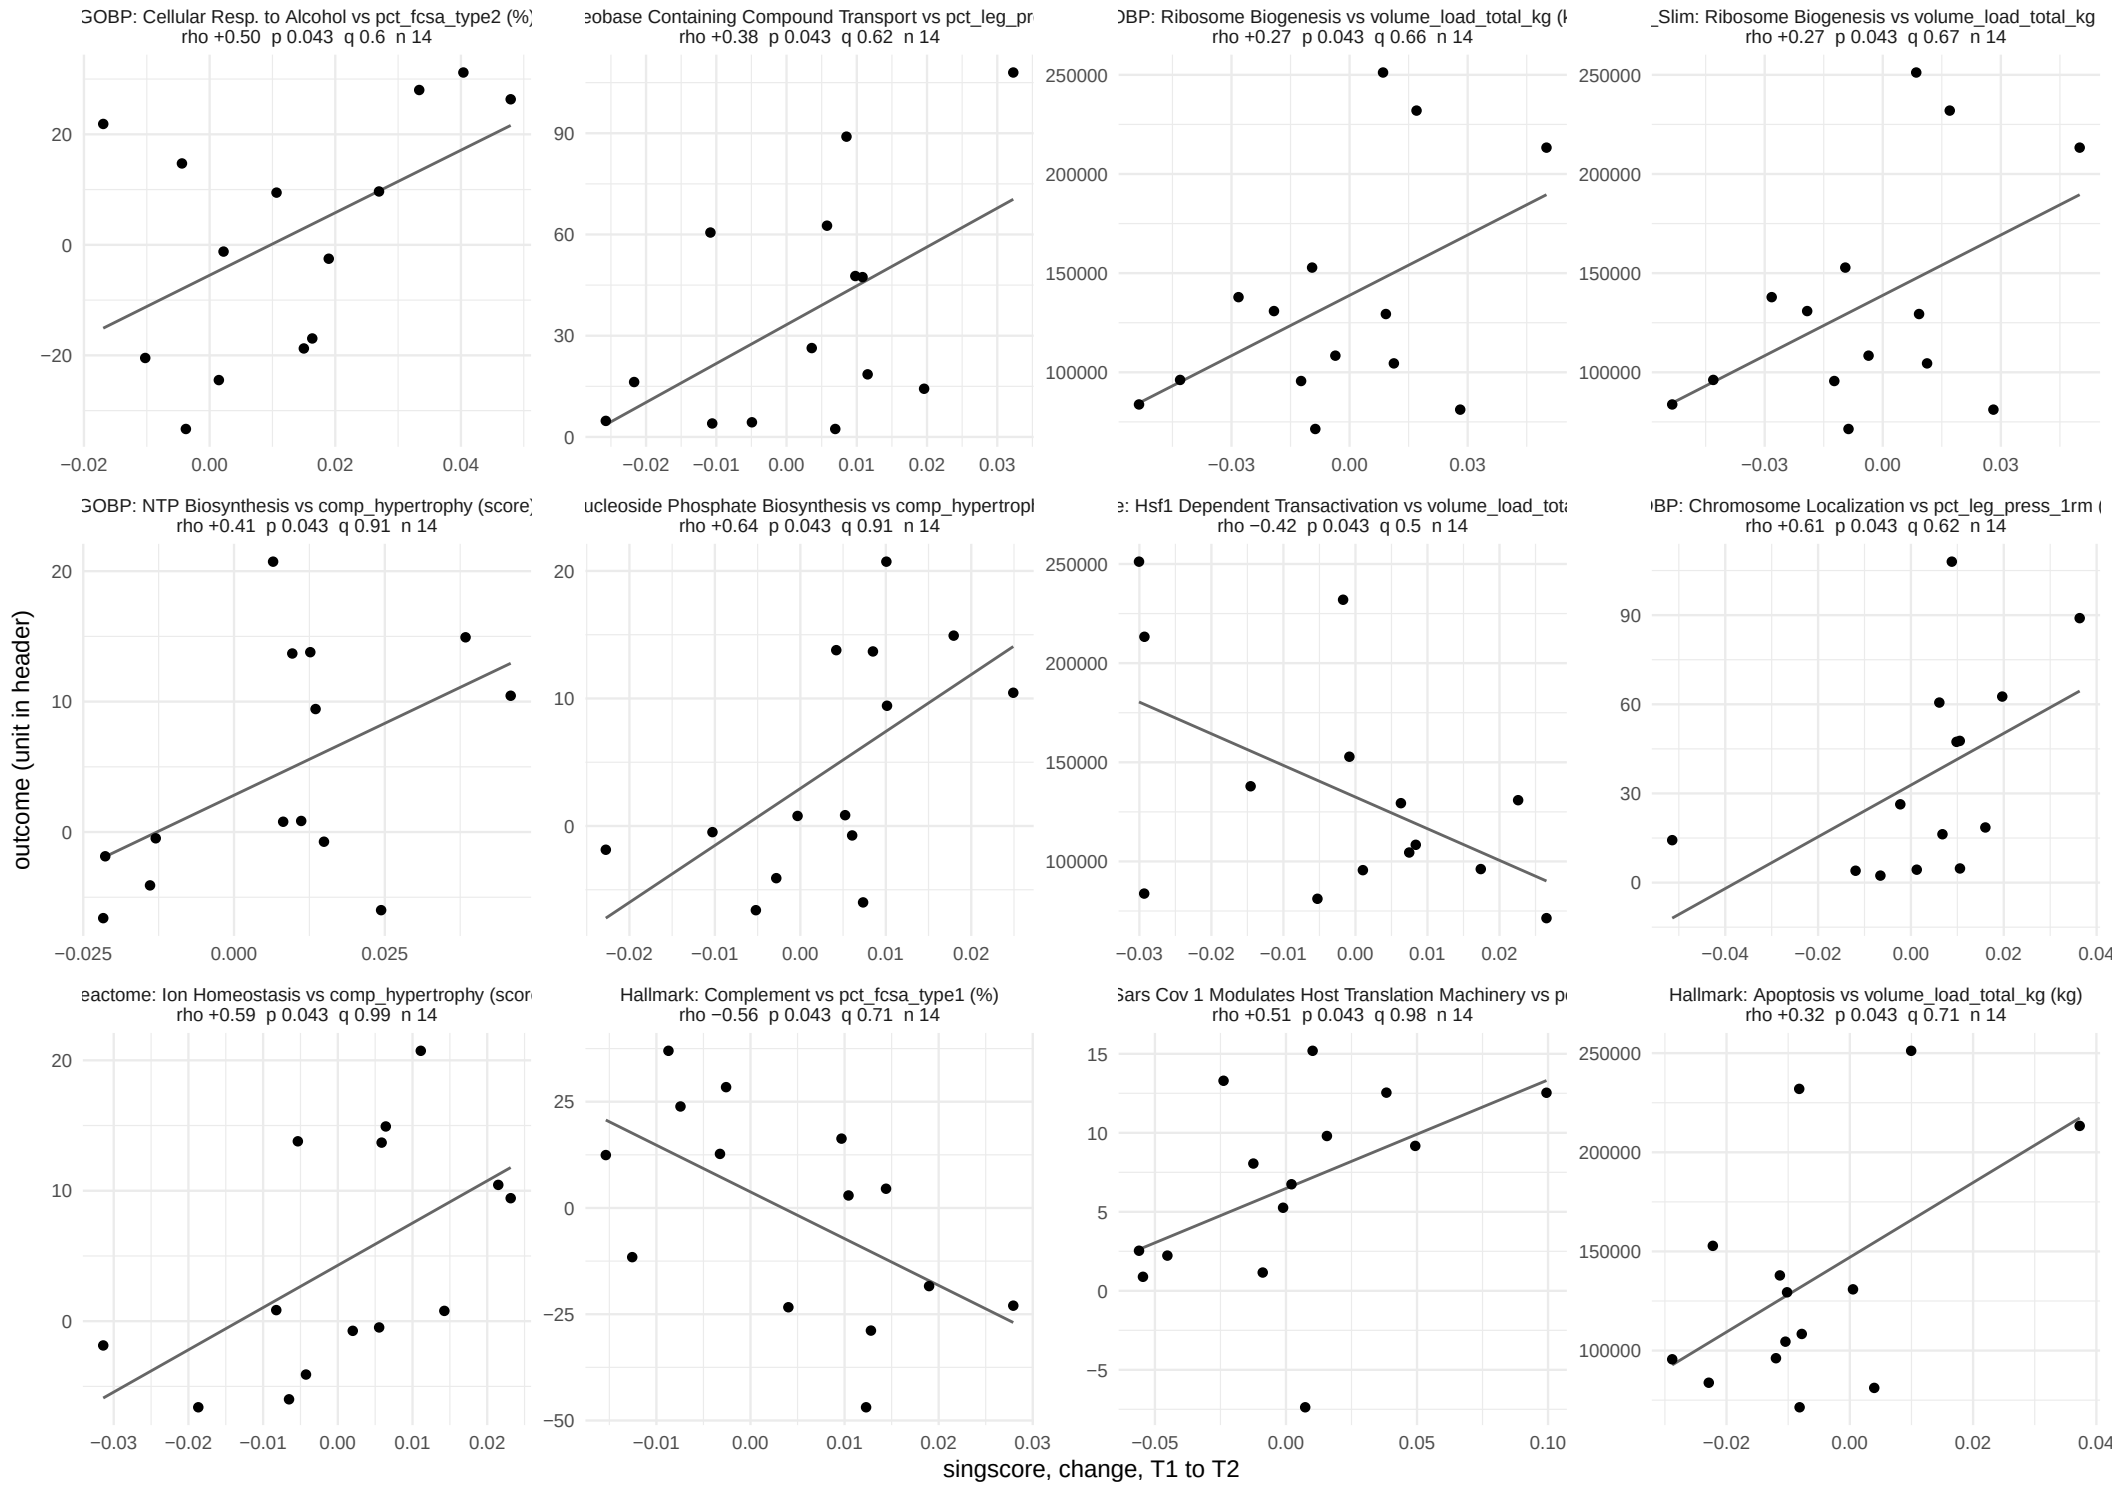

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, training window


413 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 29 of 35.

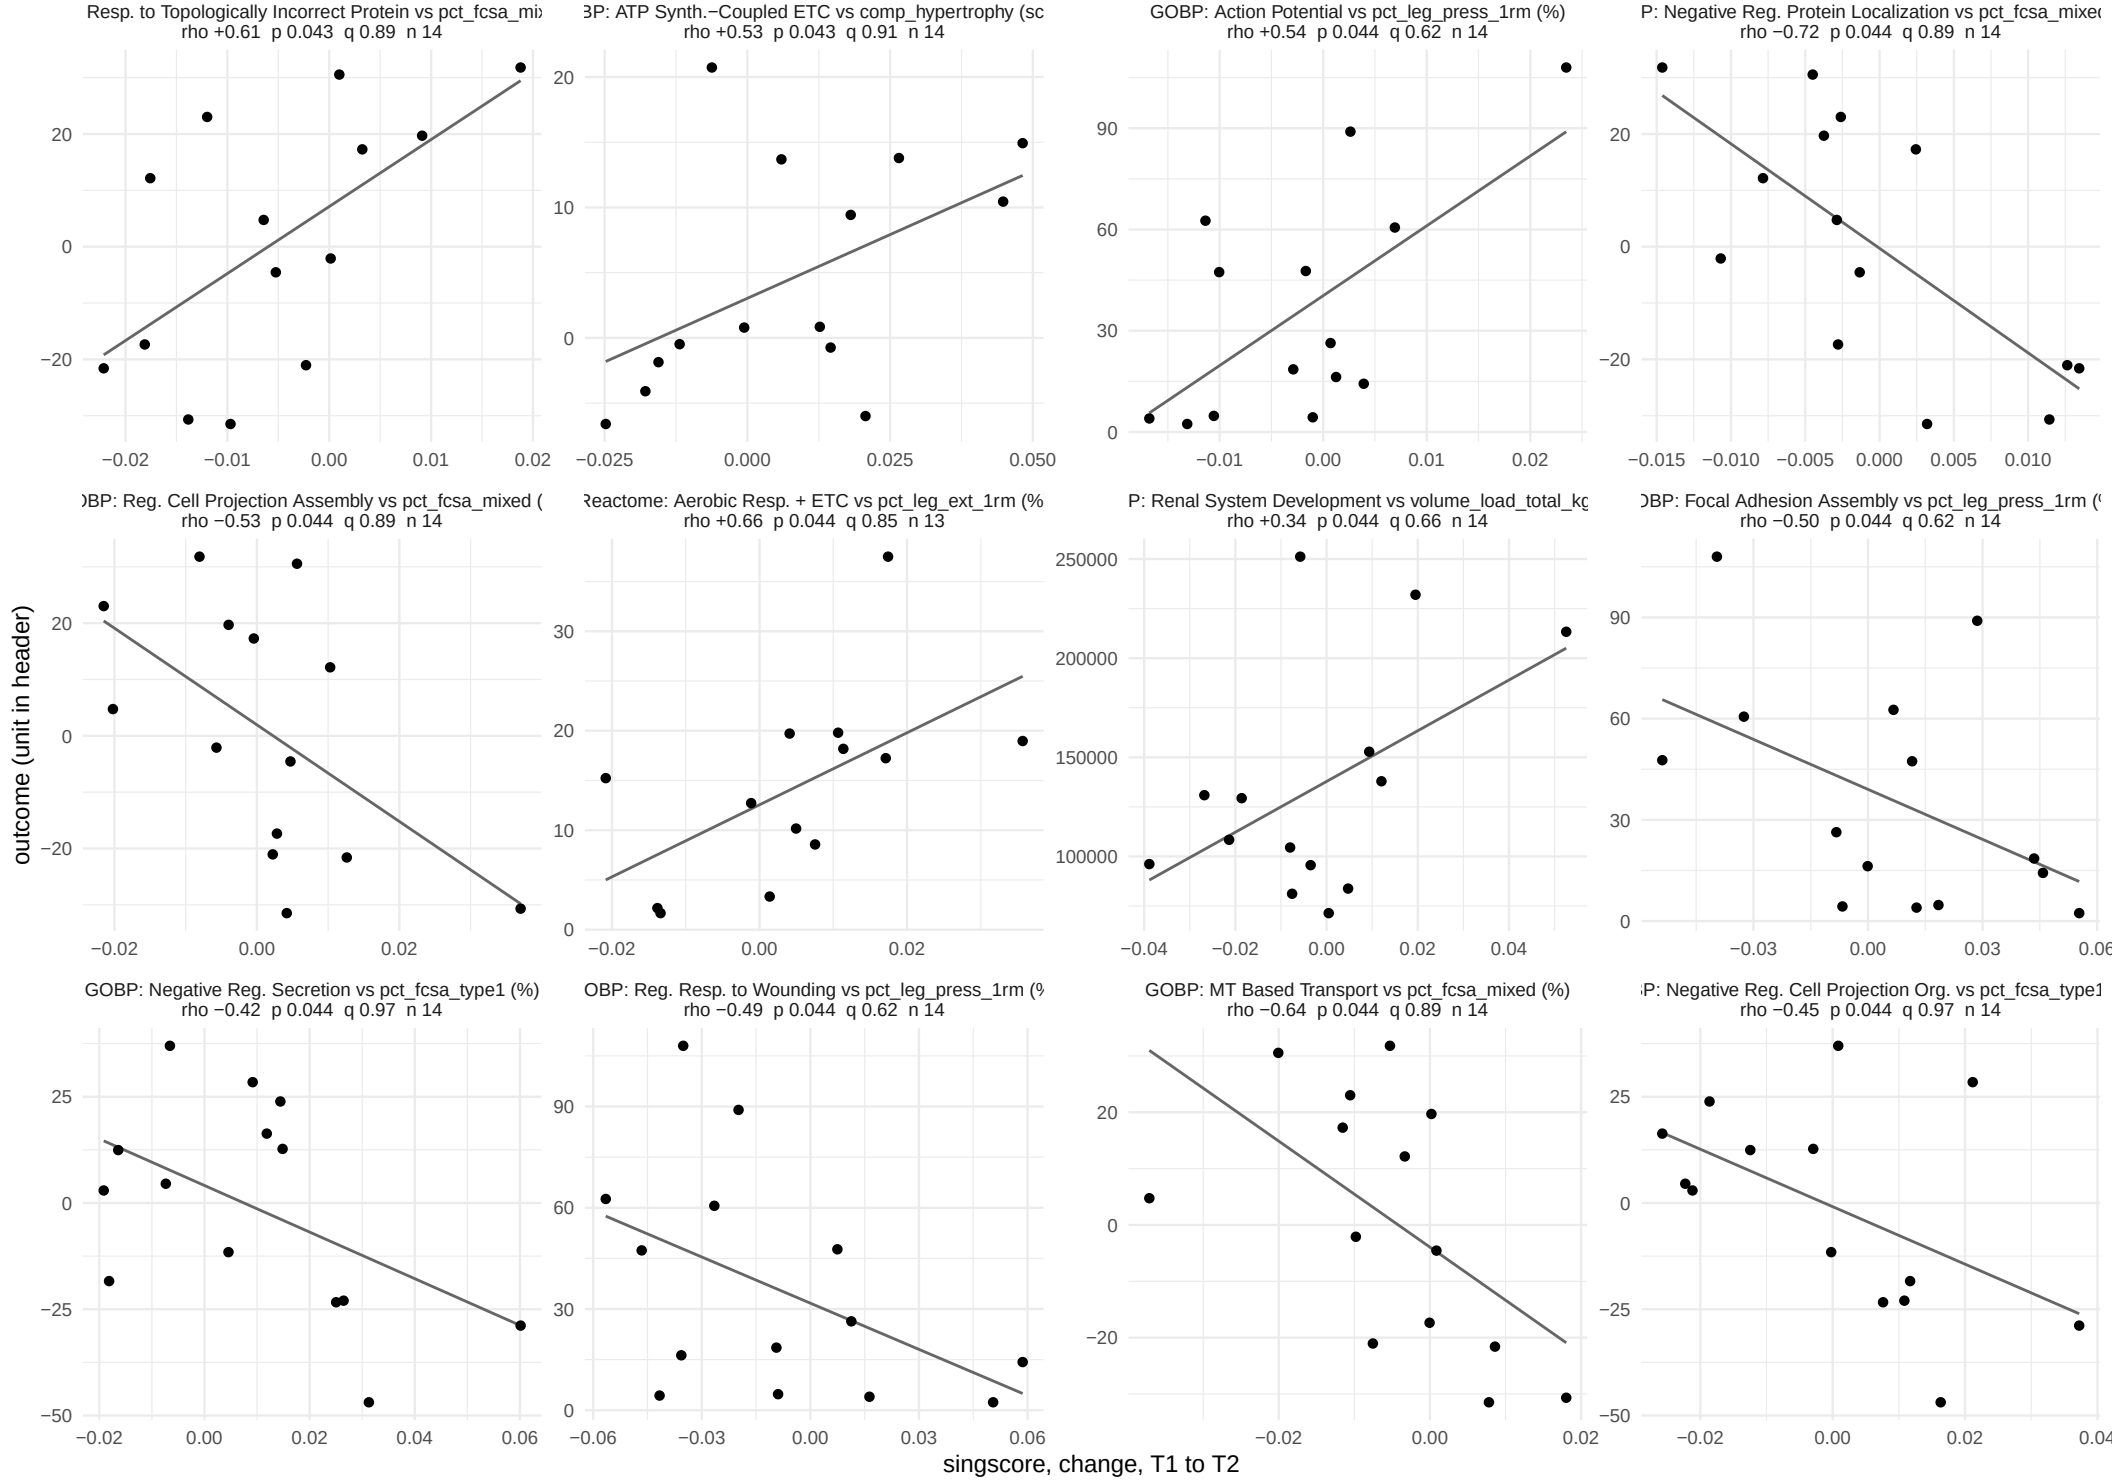

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, training window


413 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 30 of 35.

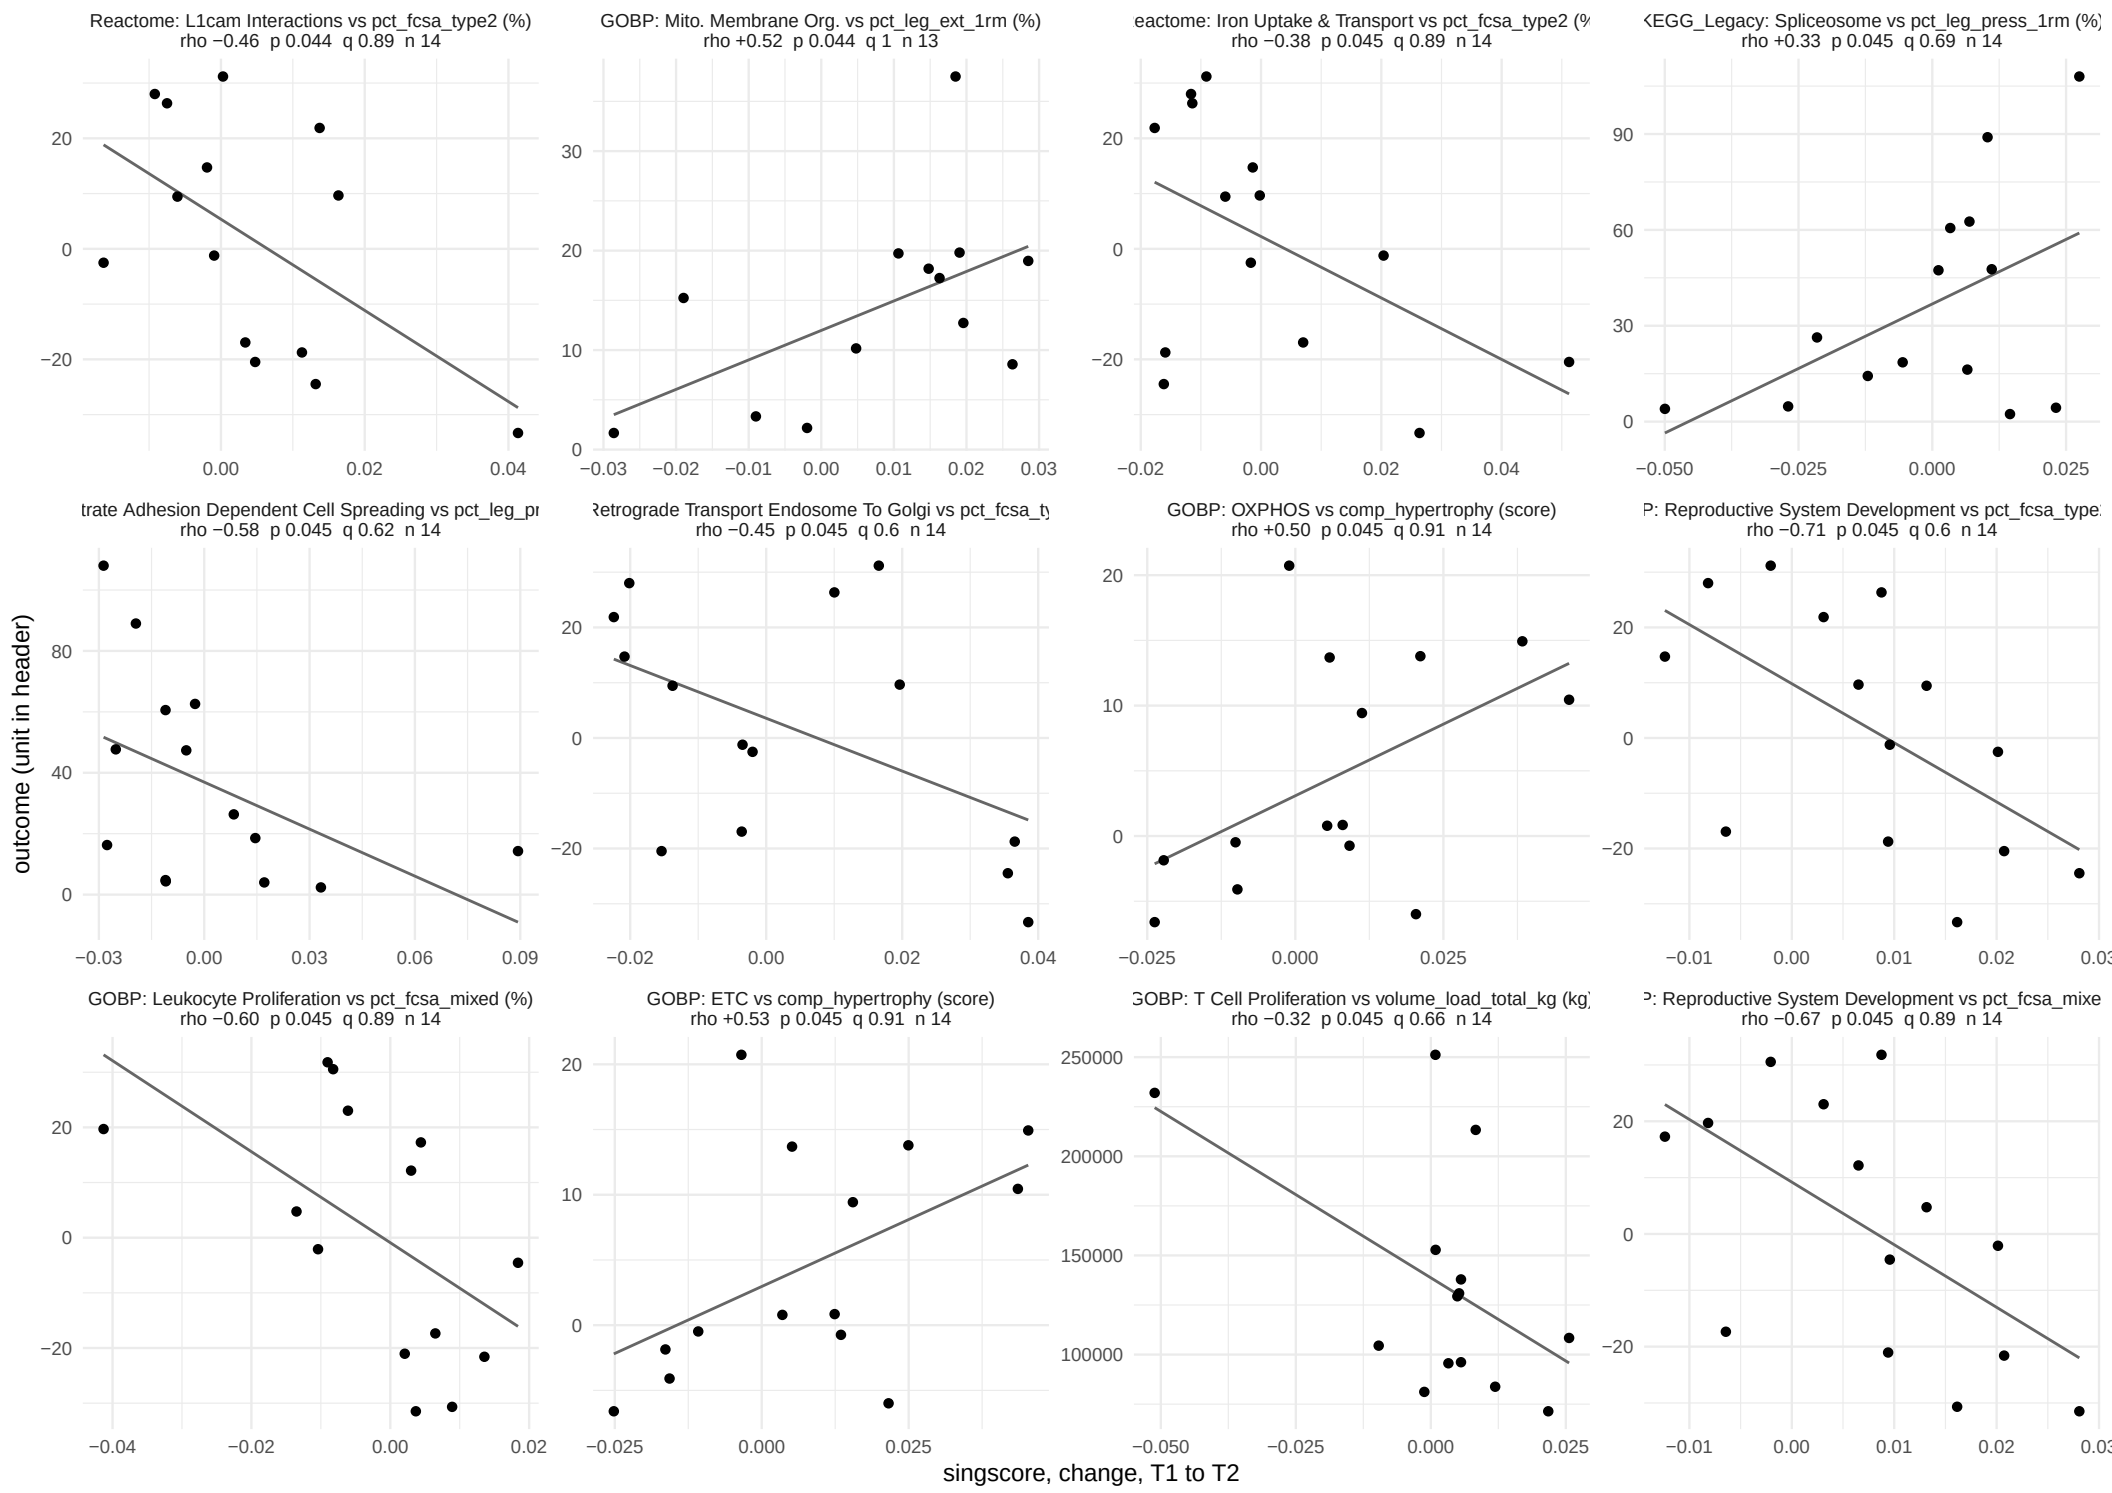

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, training window


413 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 31 of 35.

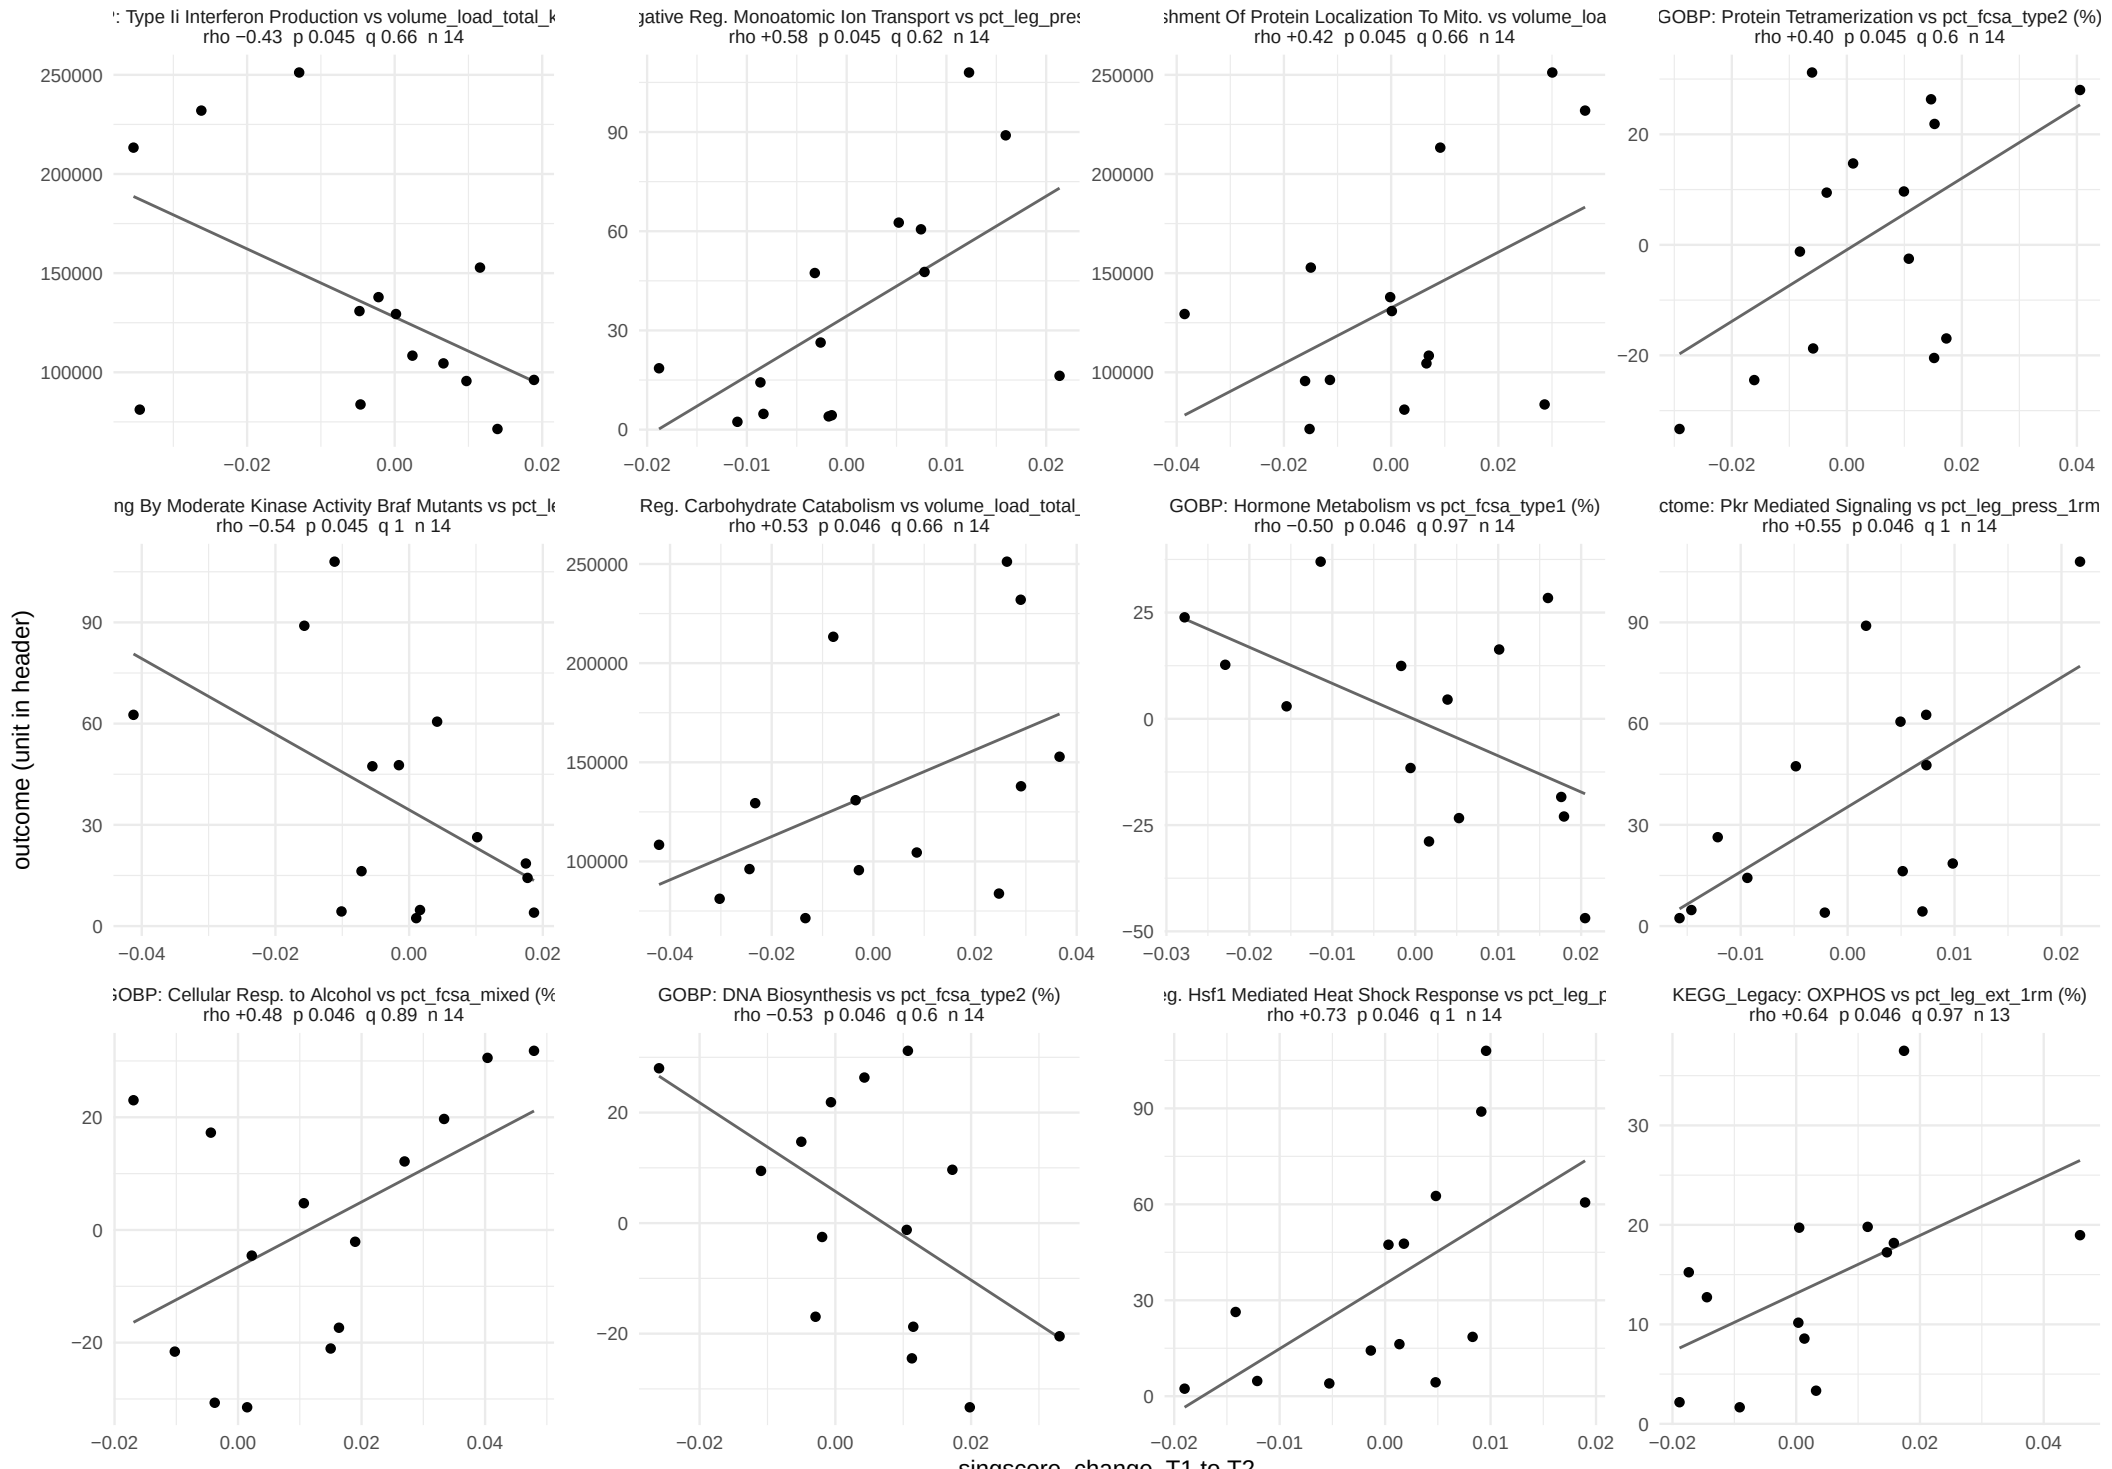

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, training window


413 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 32 of 35.

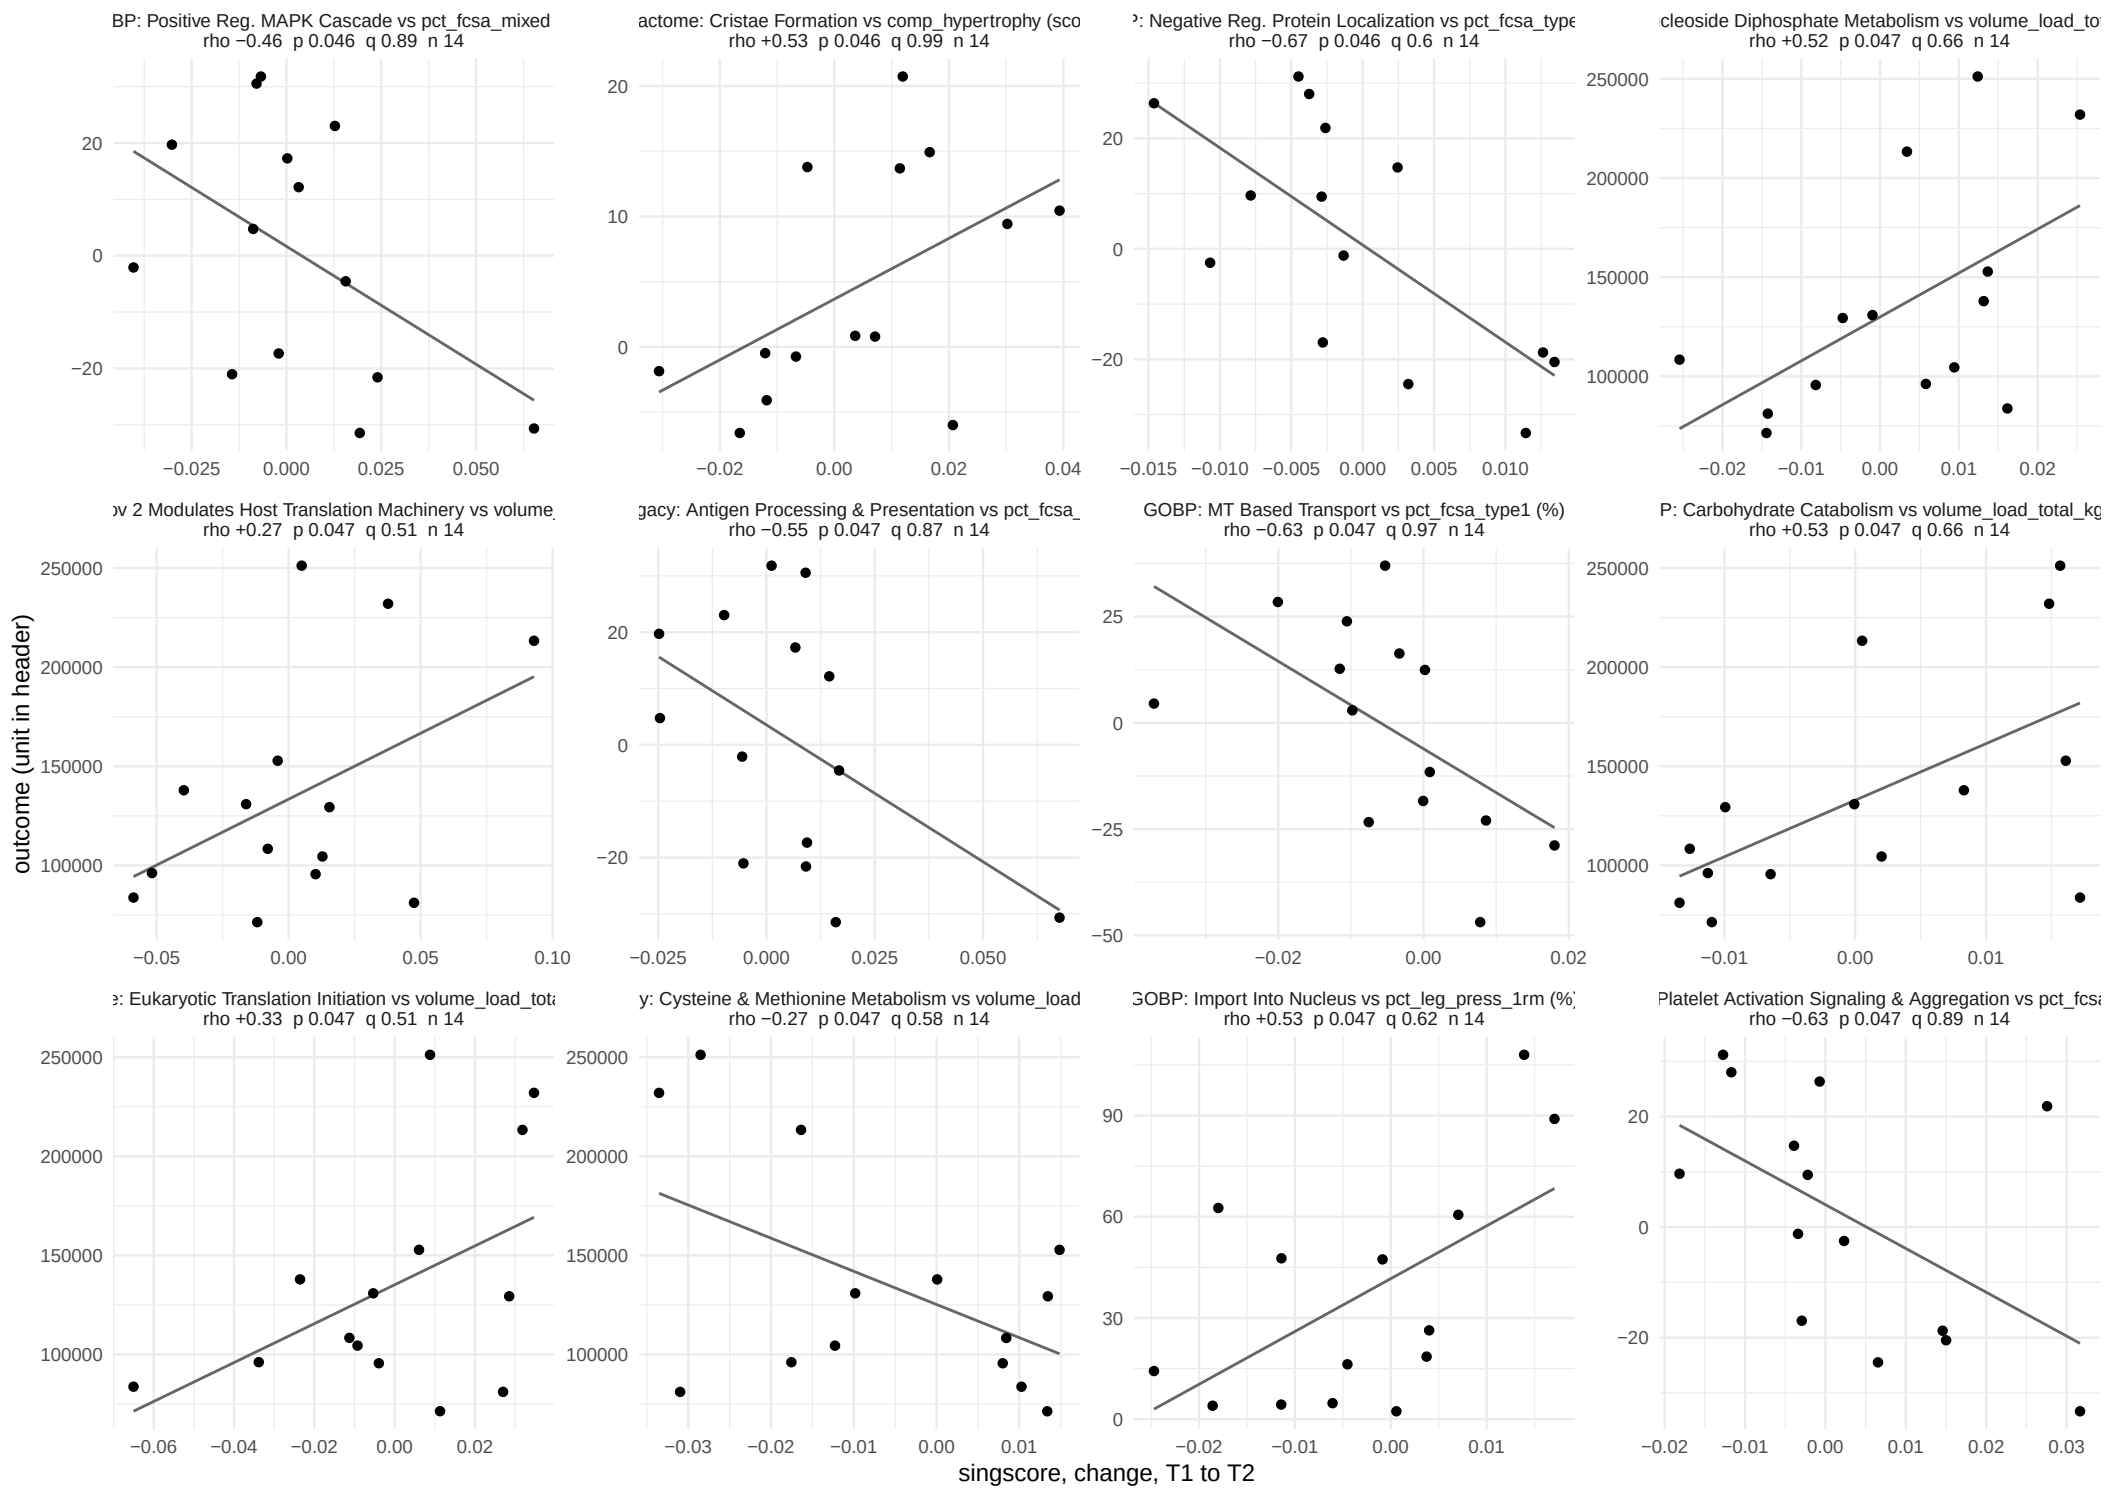

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, training window


413 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 33 of 35.

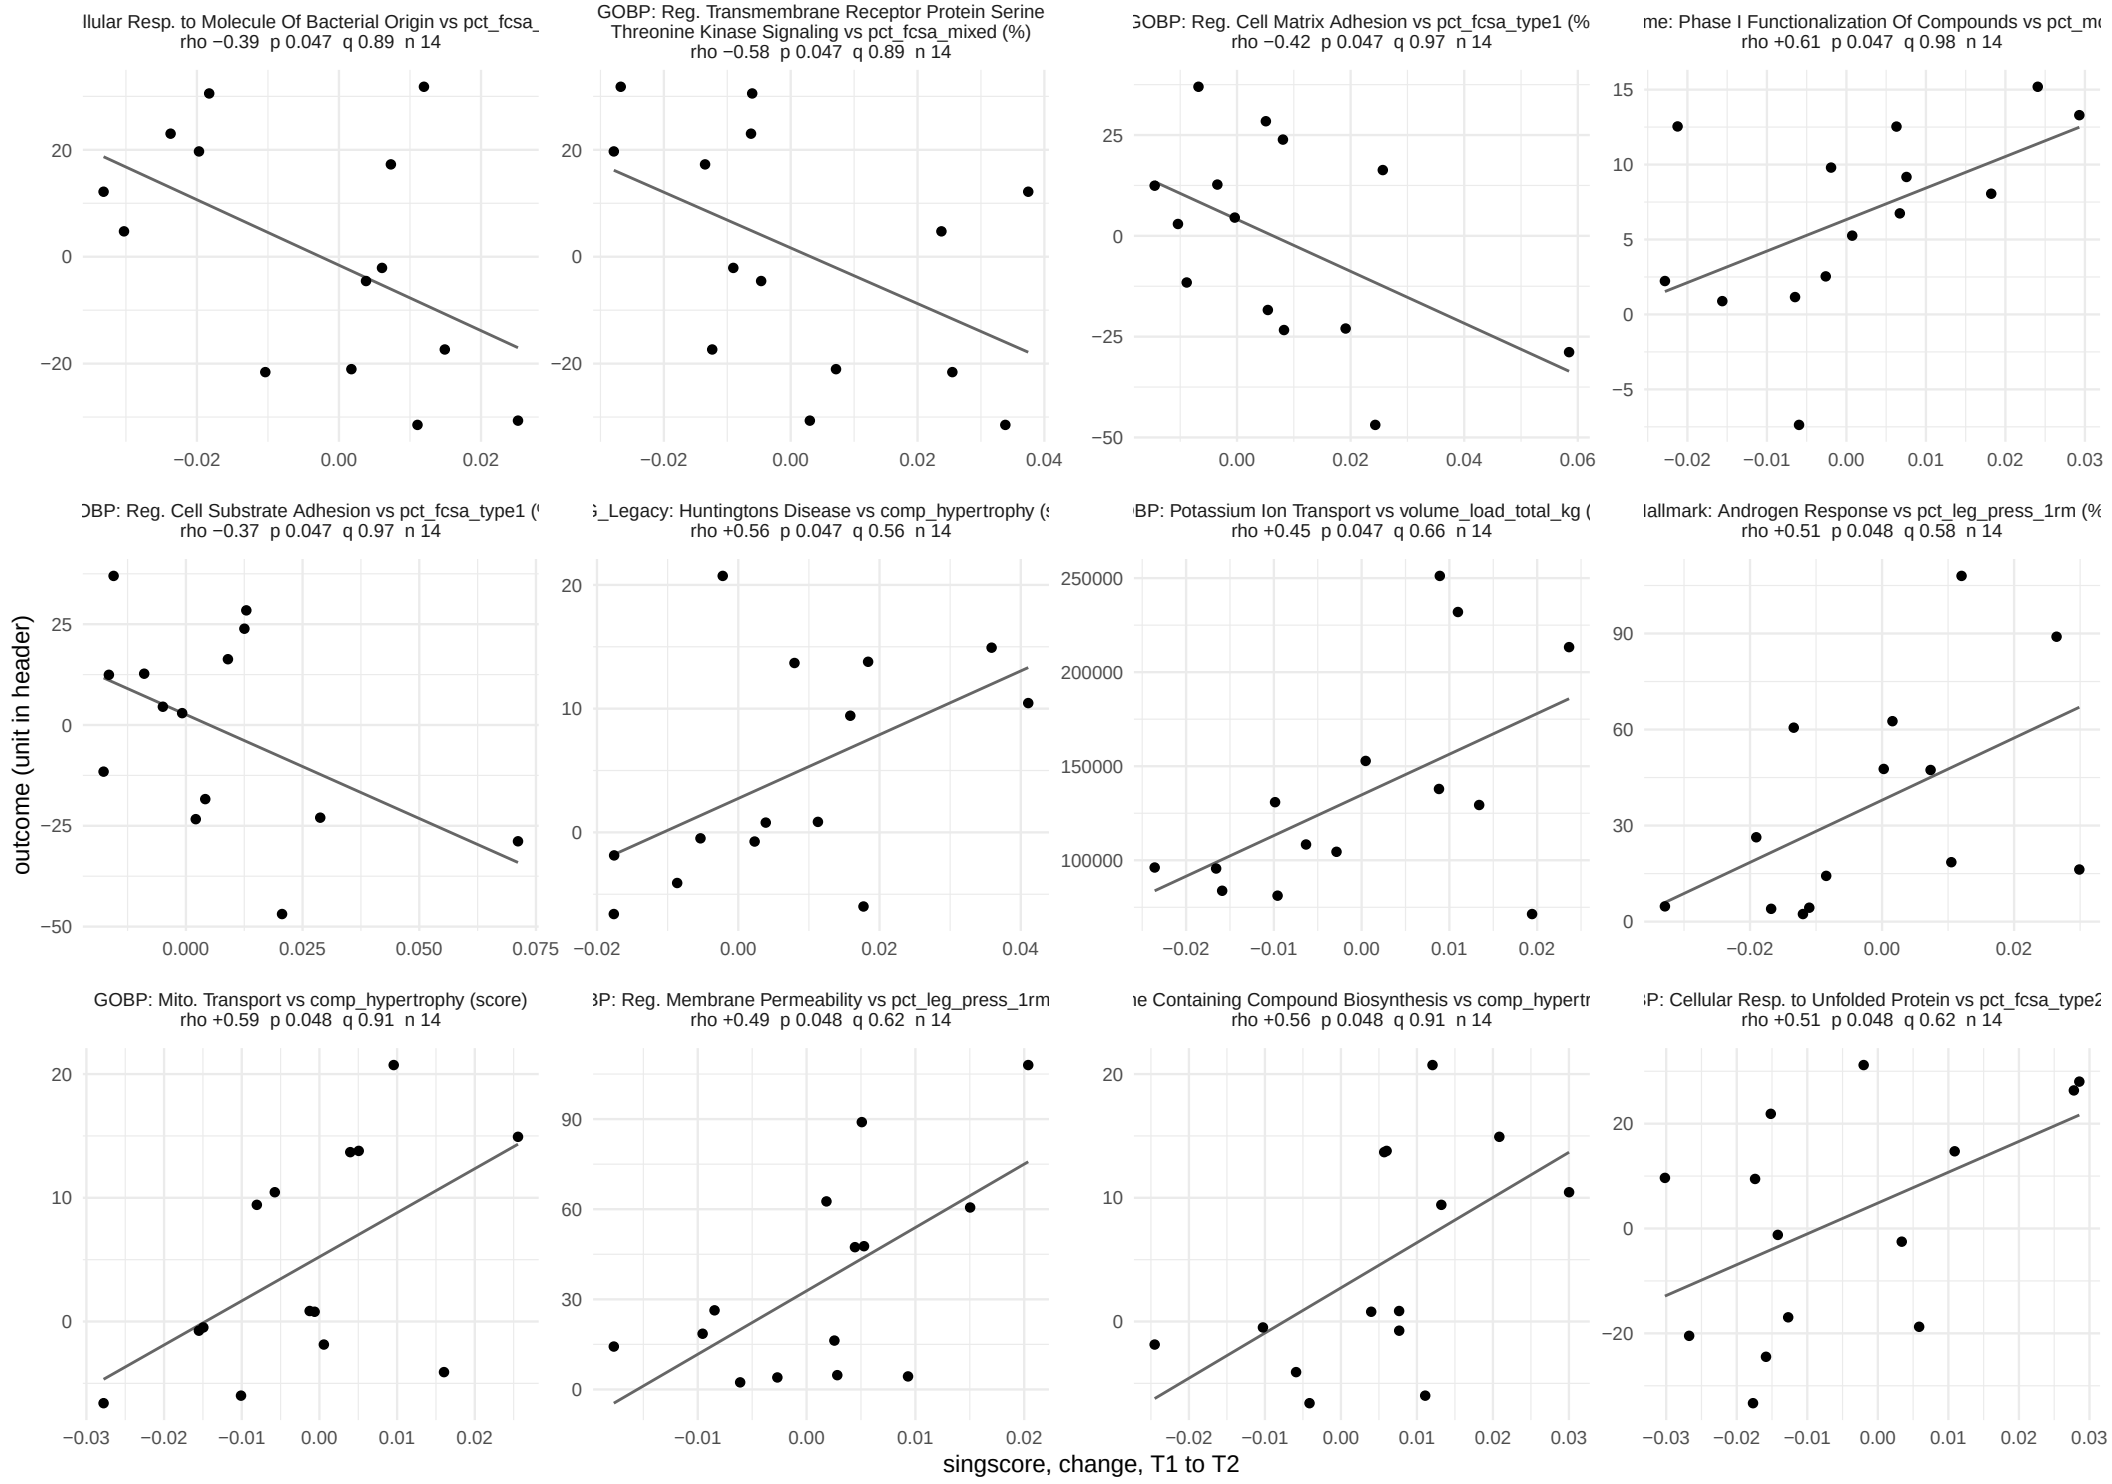

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, training window


413 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 34 of 35.

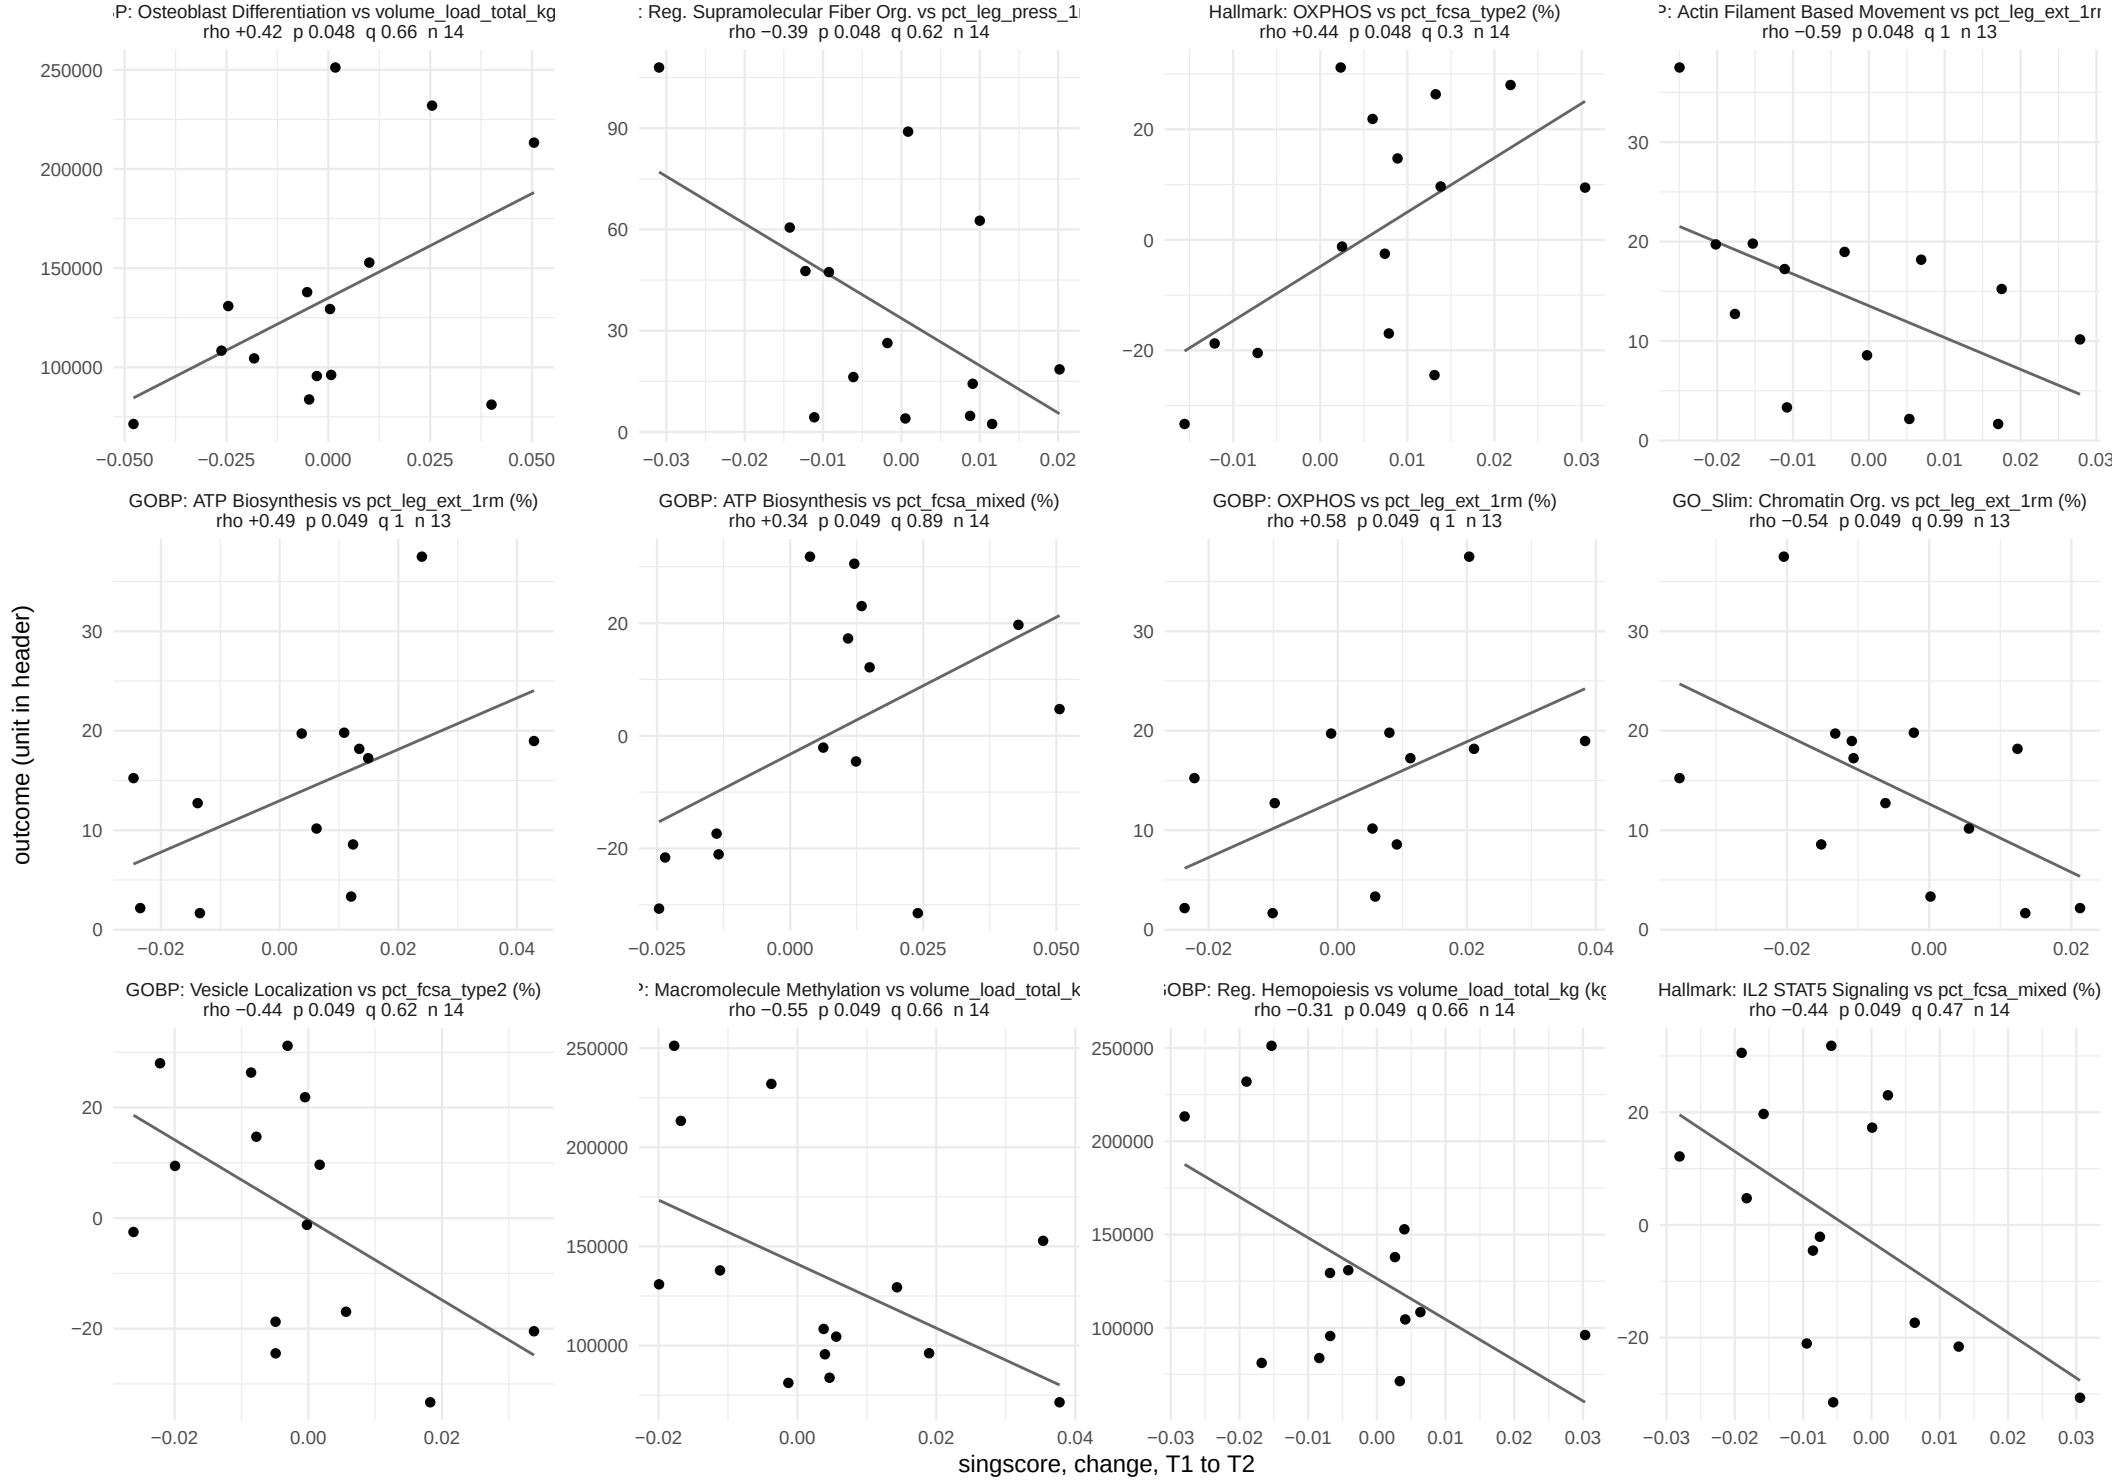

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, training window


413 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 35 of 35.

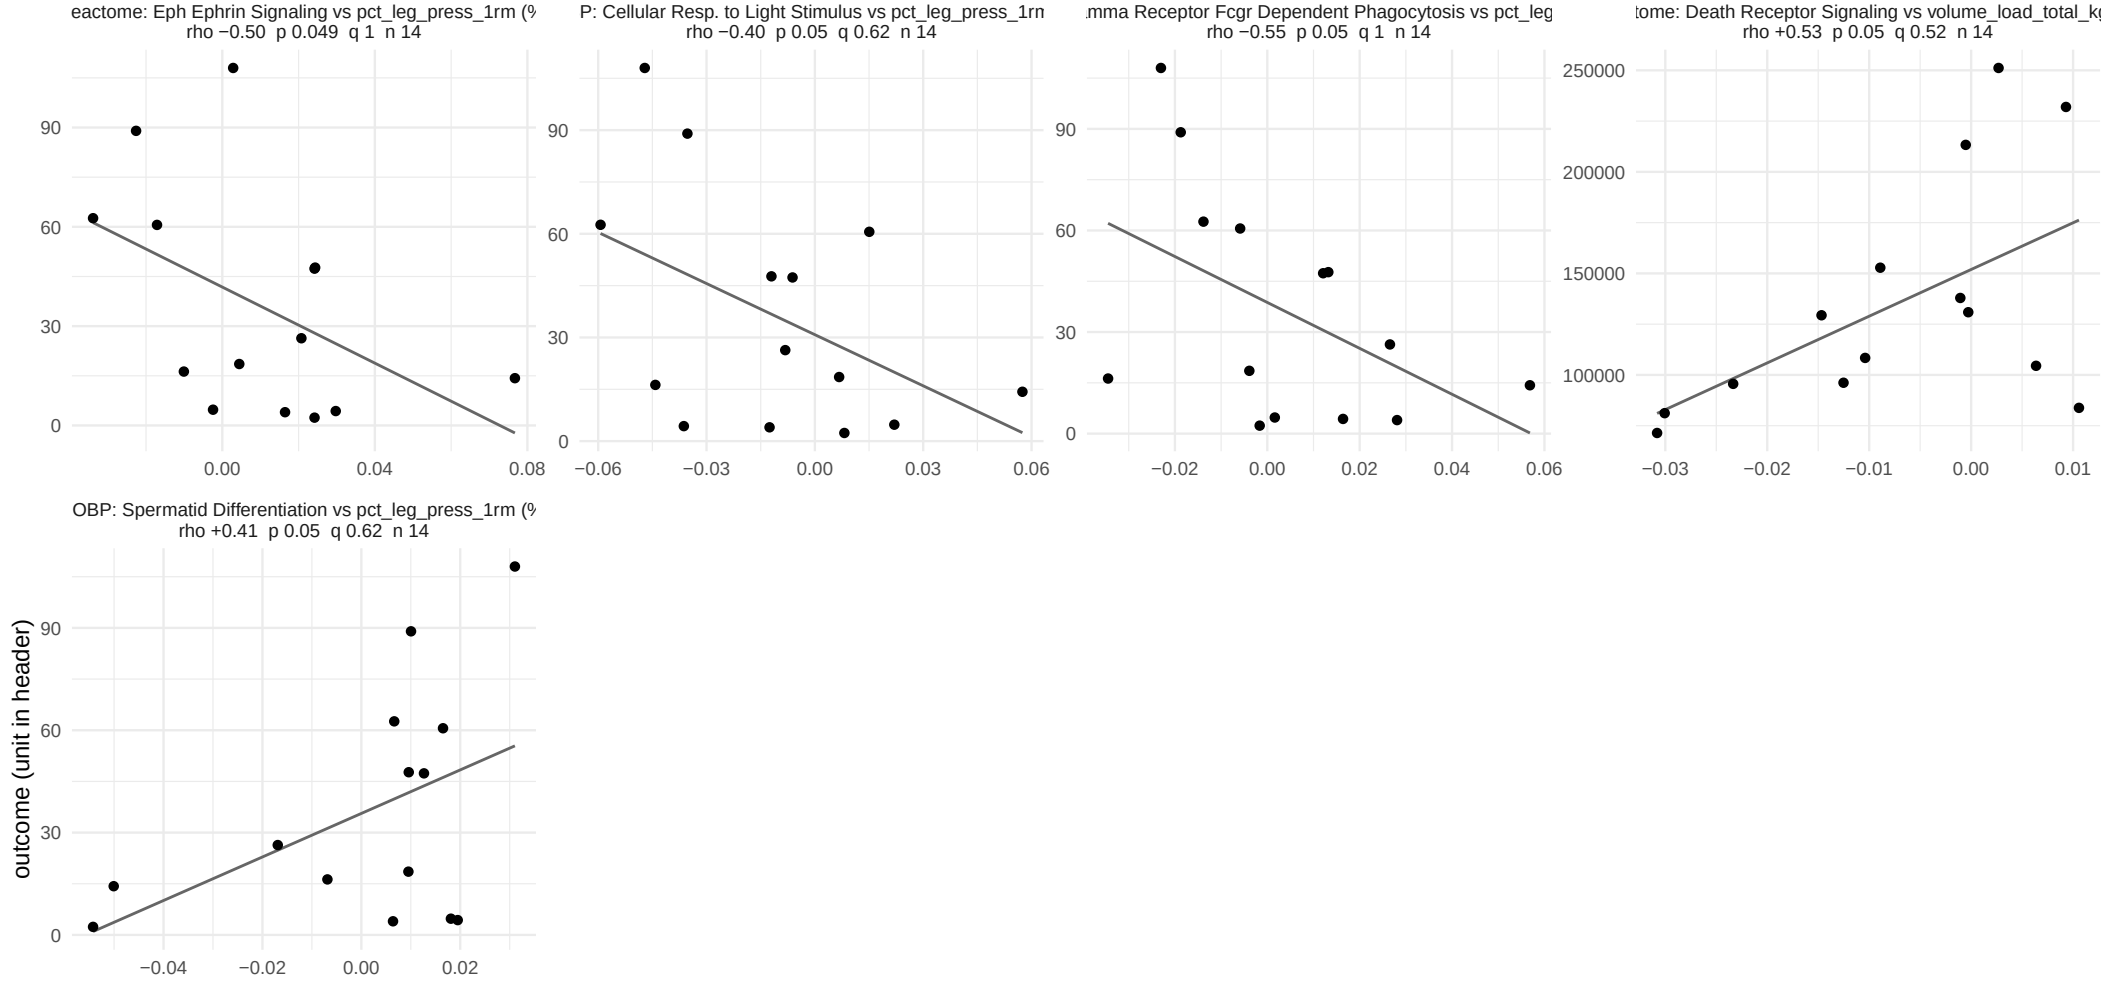

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, baseline window


439 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 1 of 37.

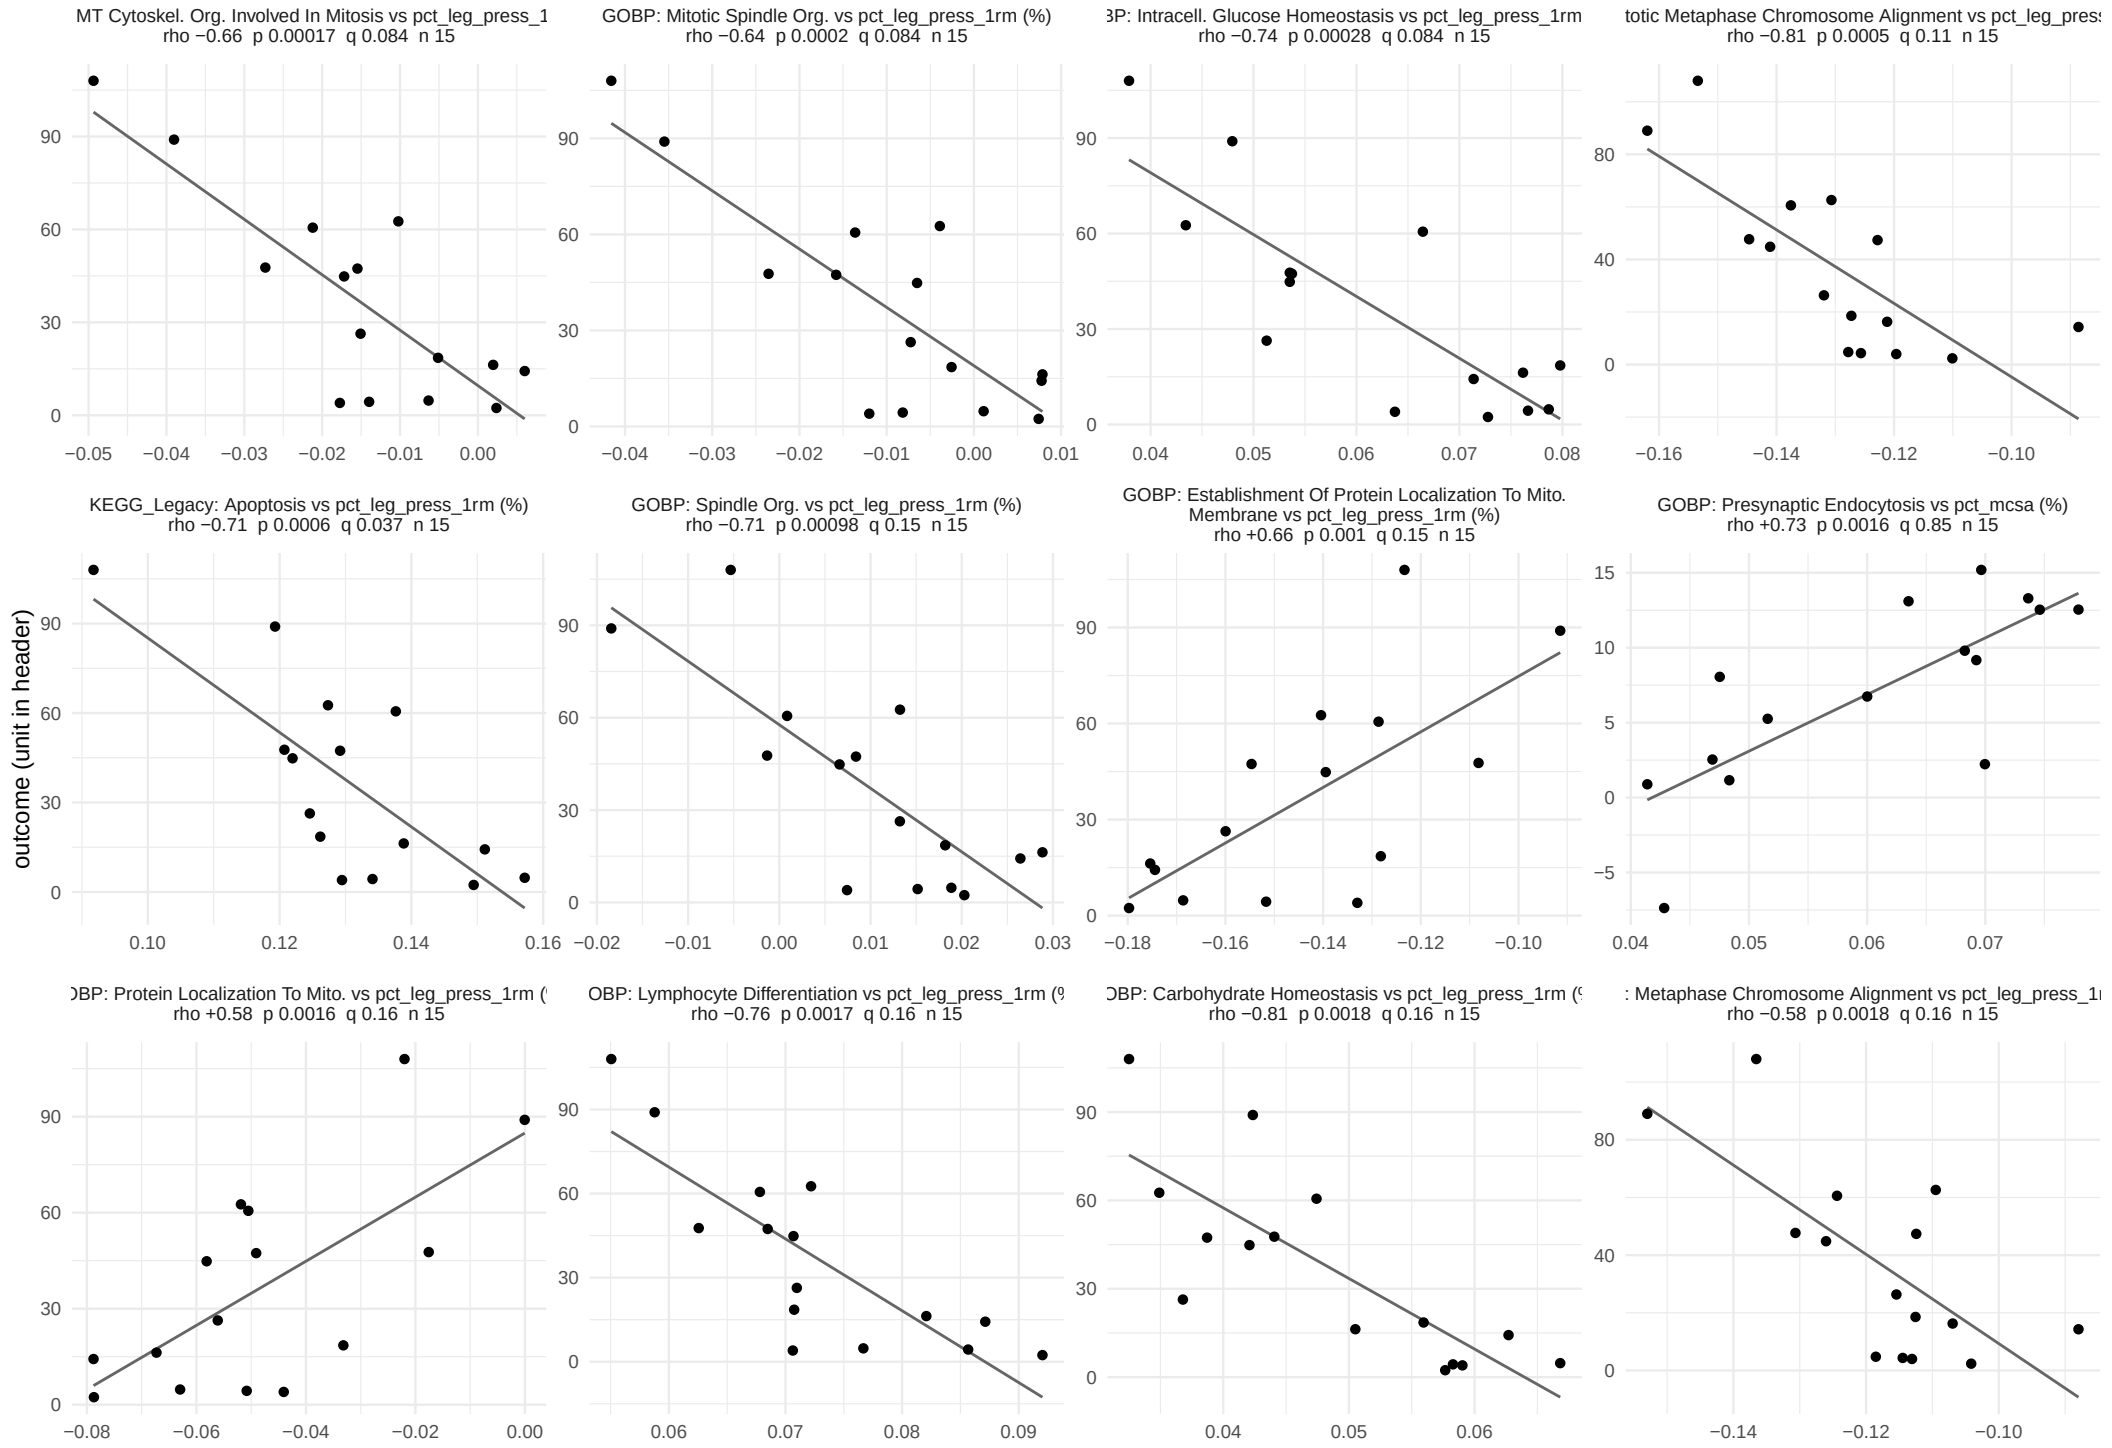

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, baseline window


439 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 2 of 37.

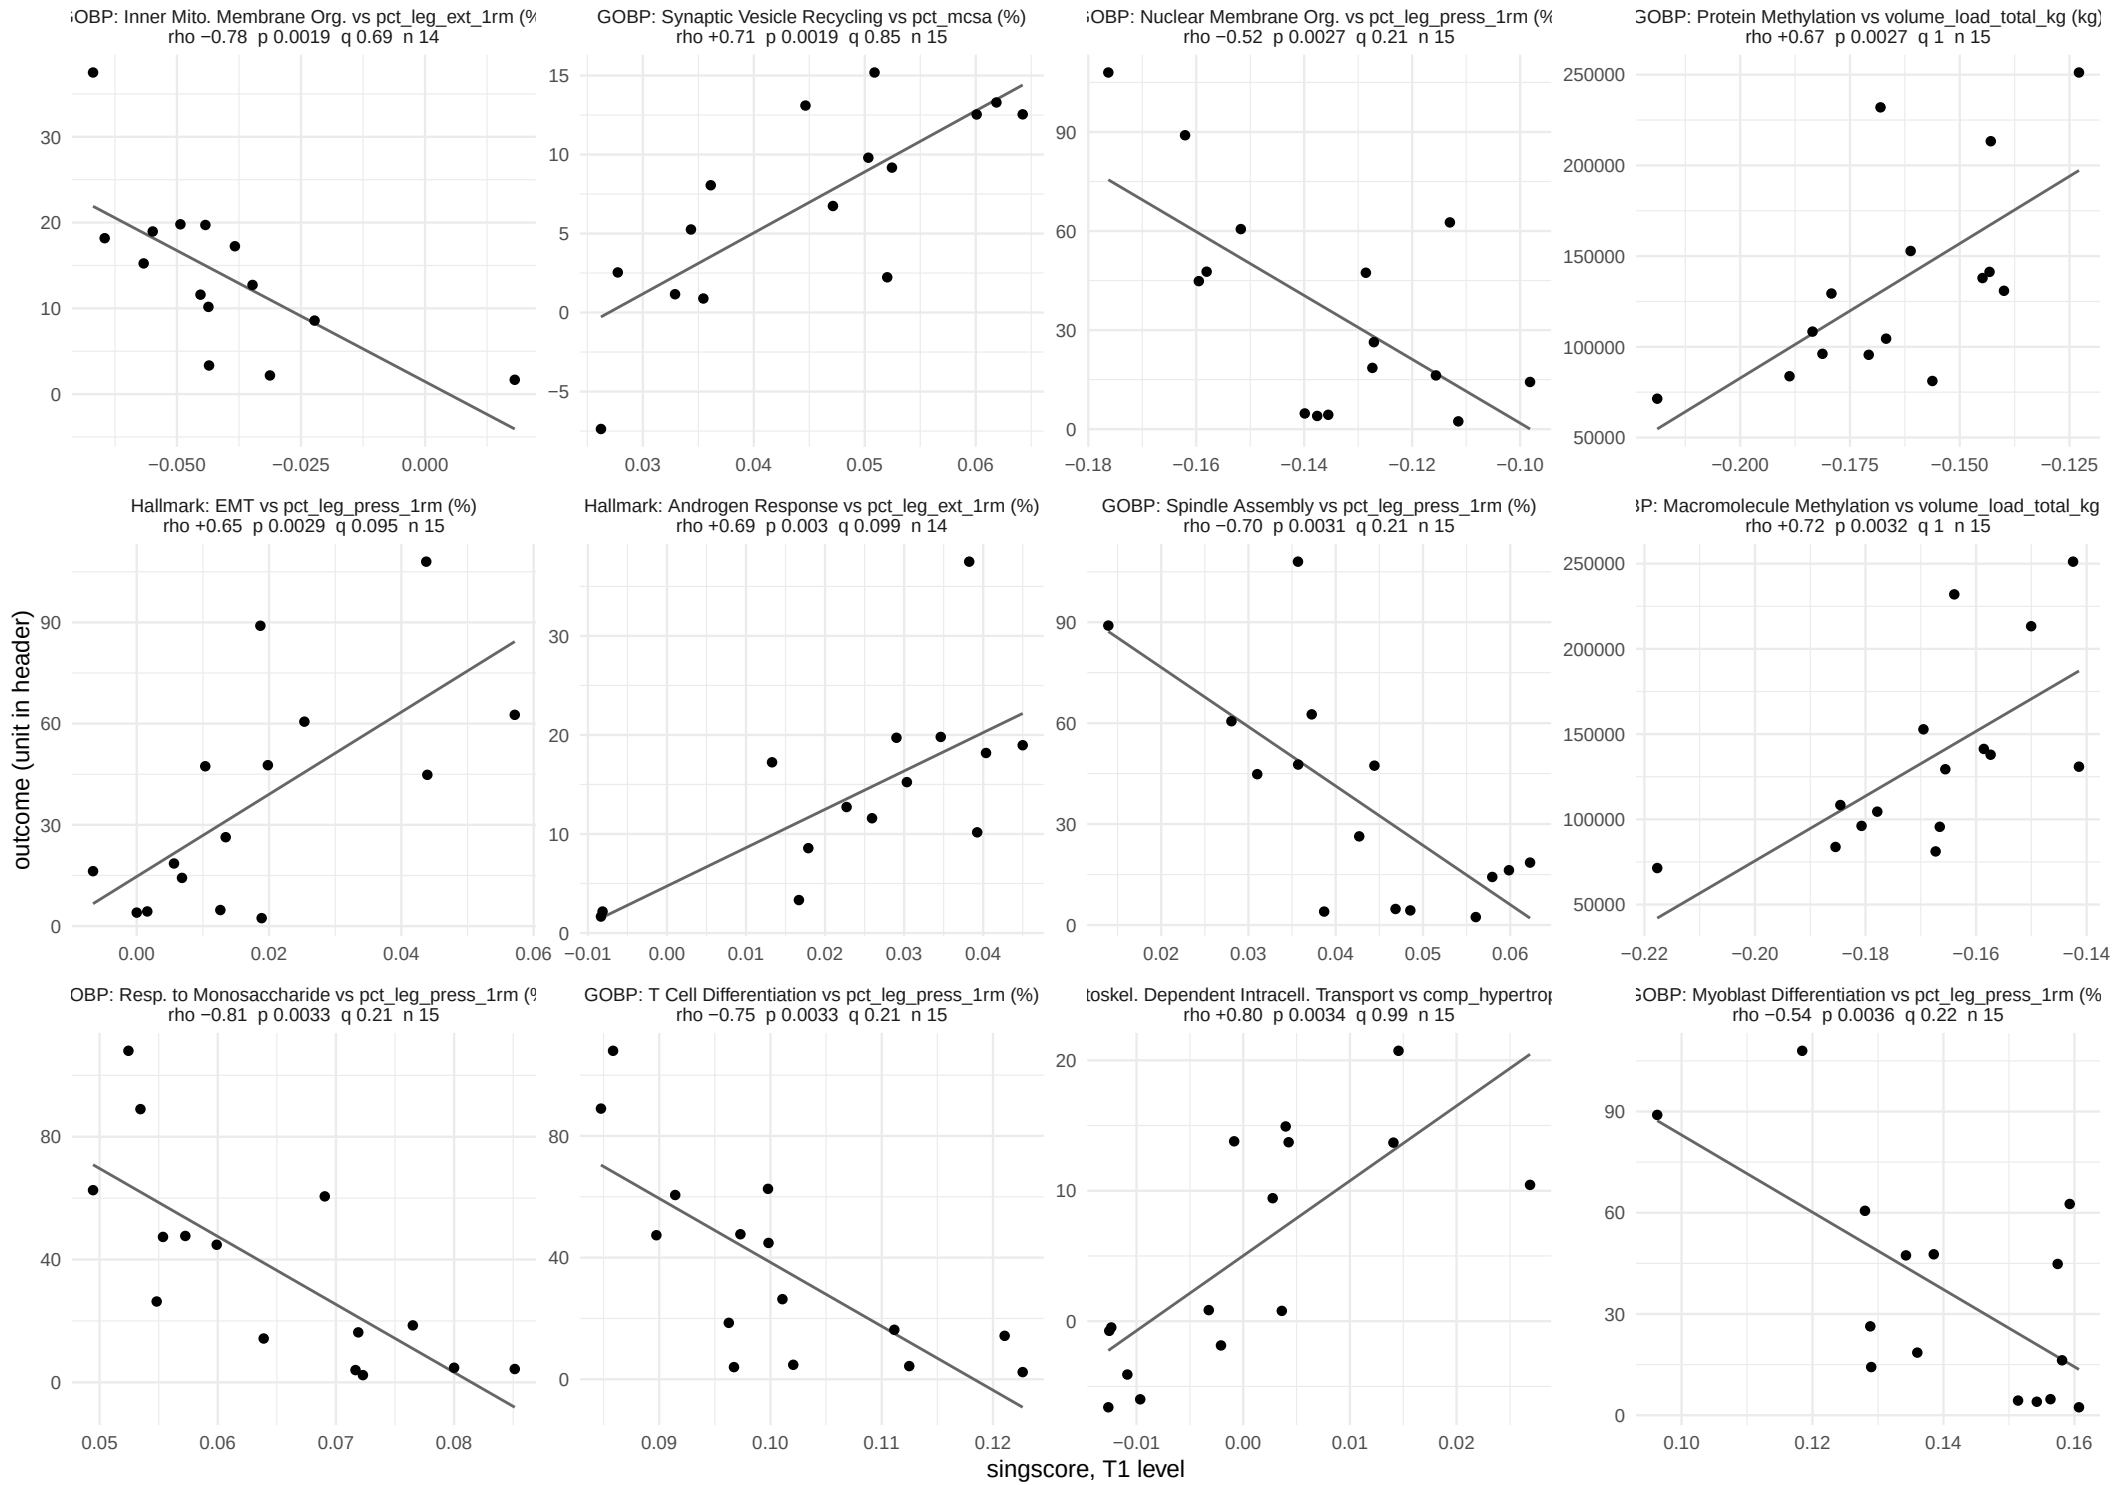

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, baseline window


439 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 3 of 37.

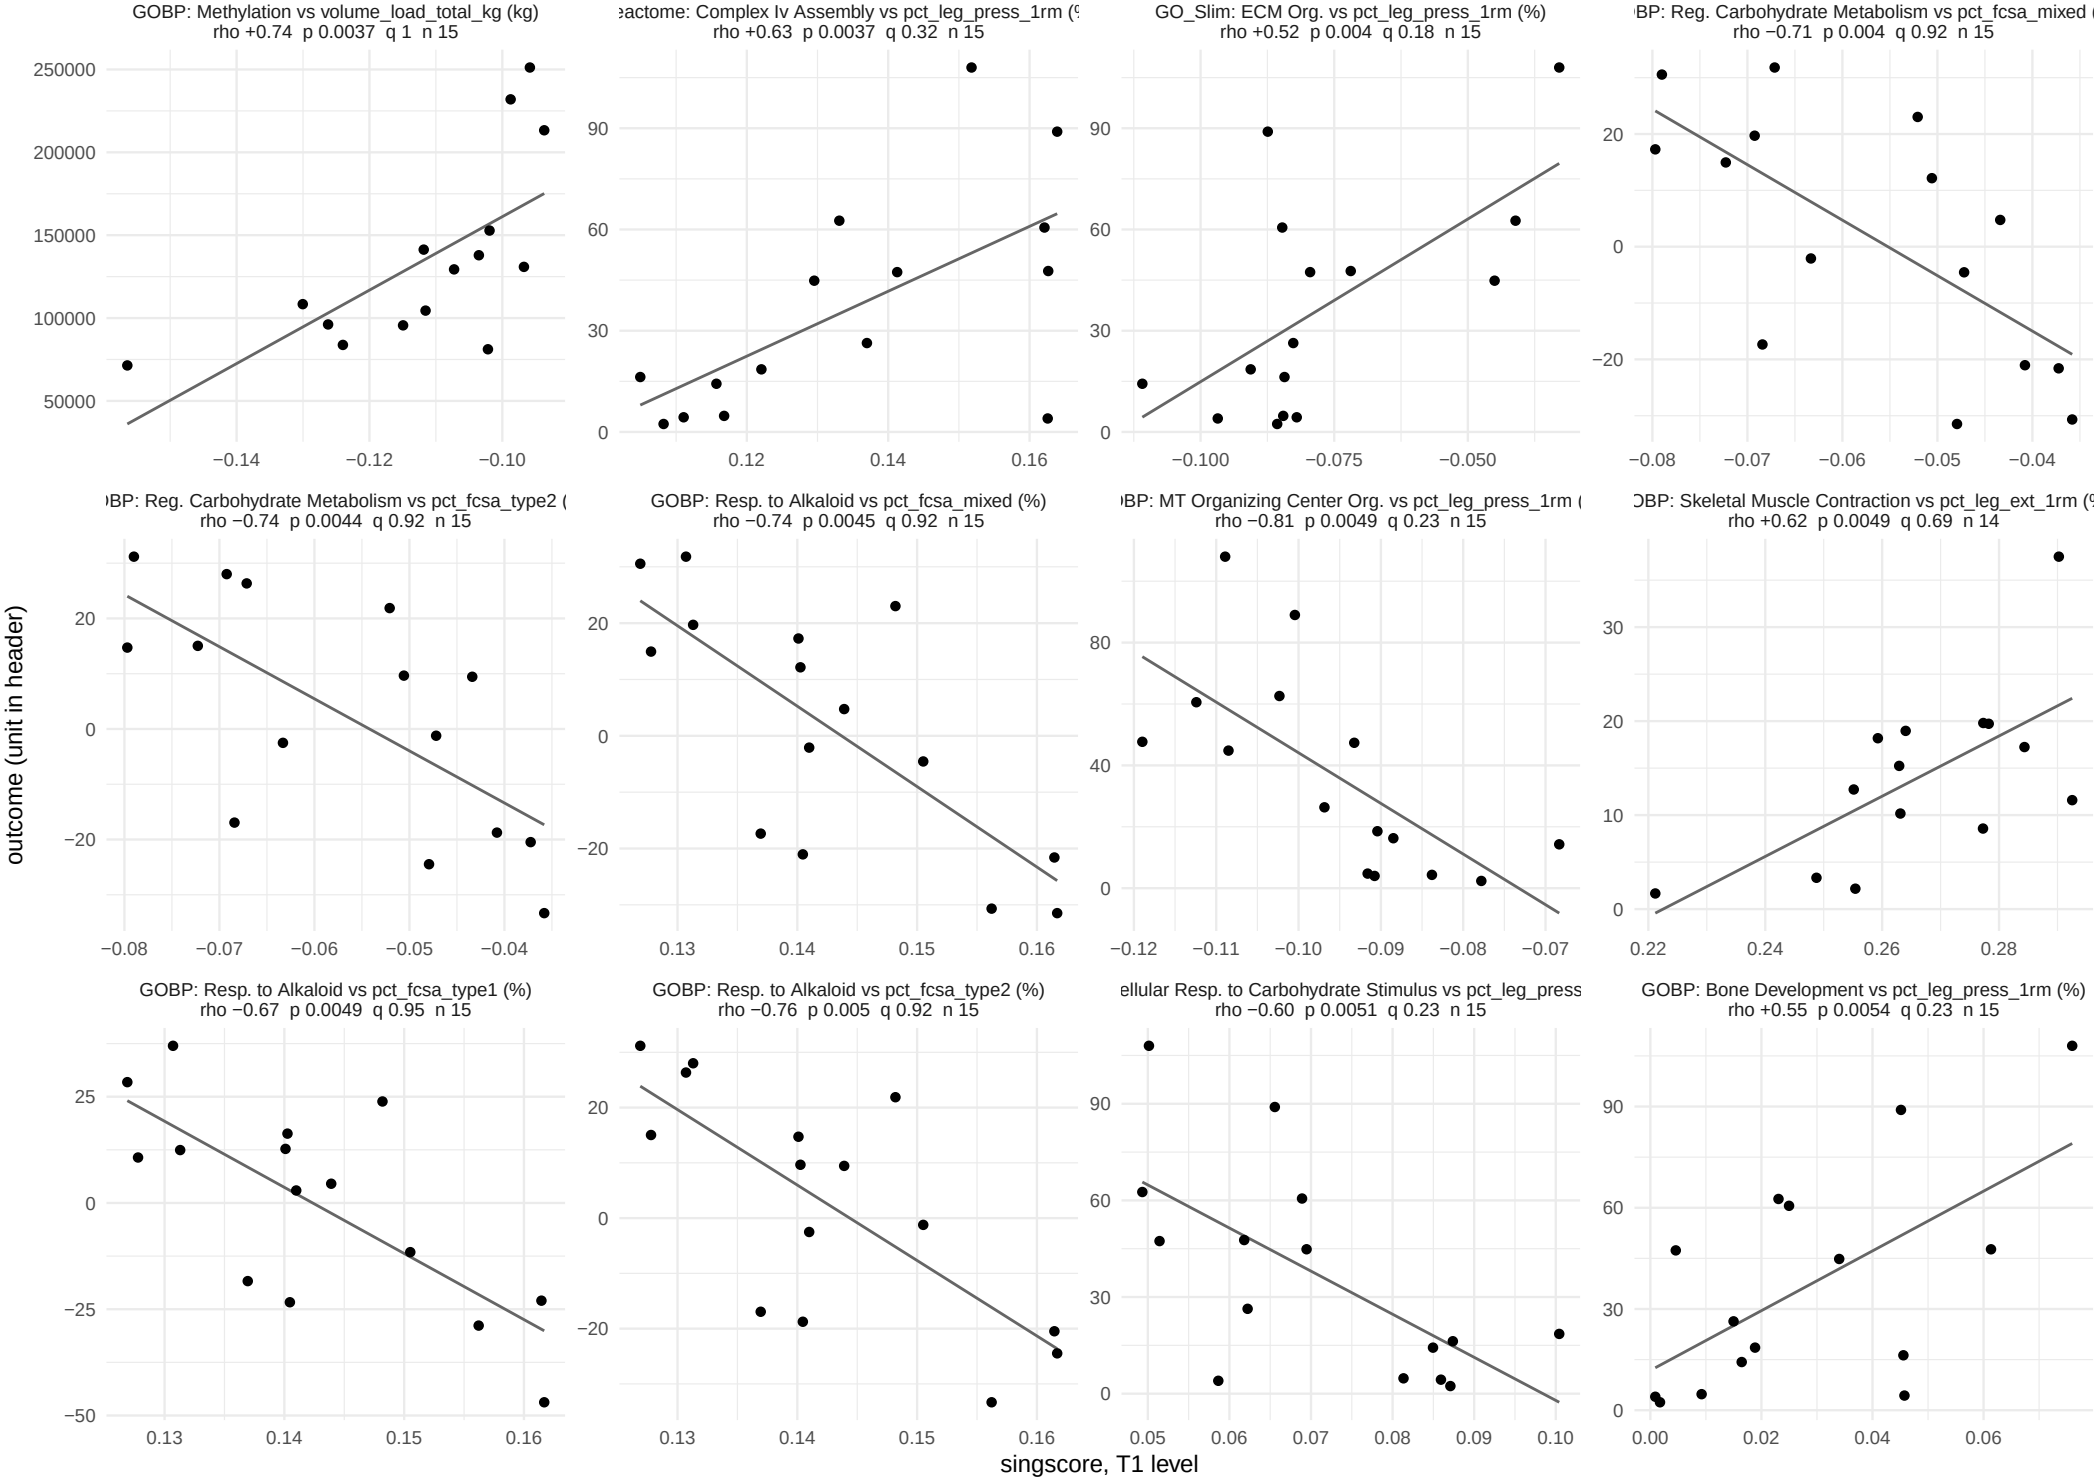

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, baseline window


439 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 4 of 37.

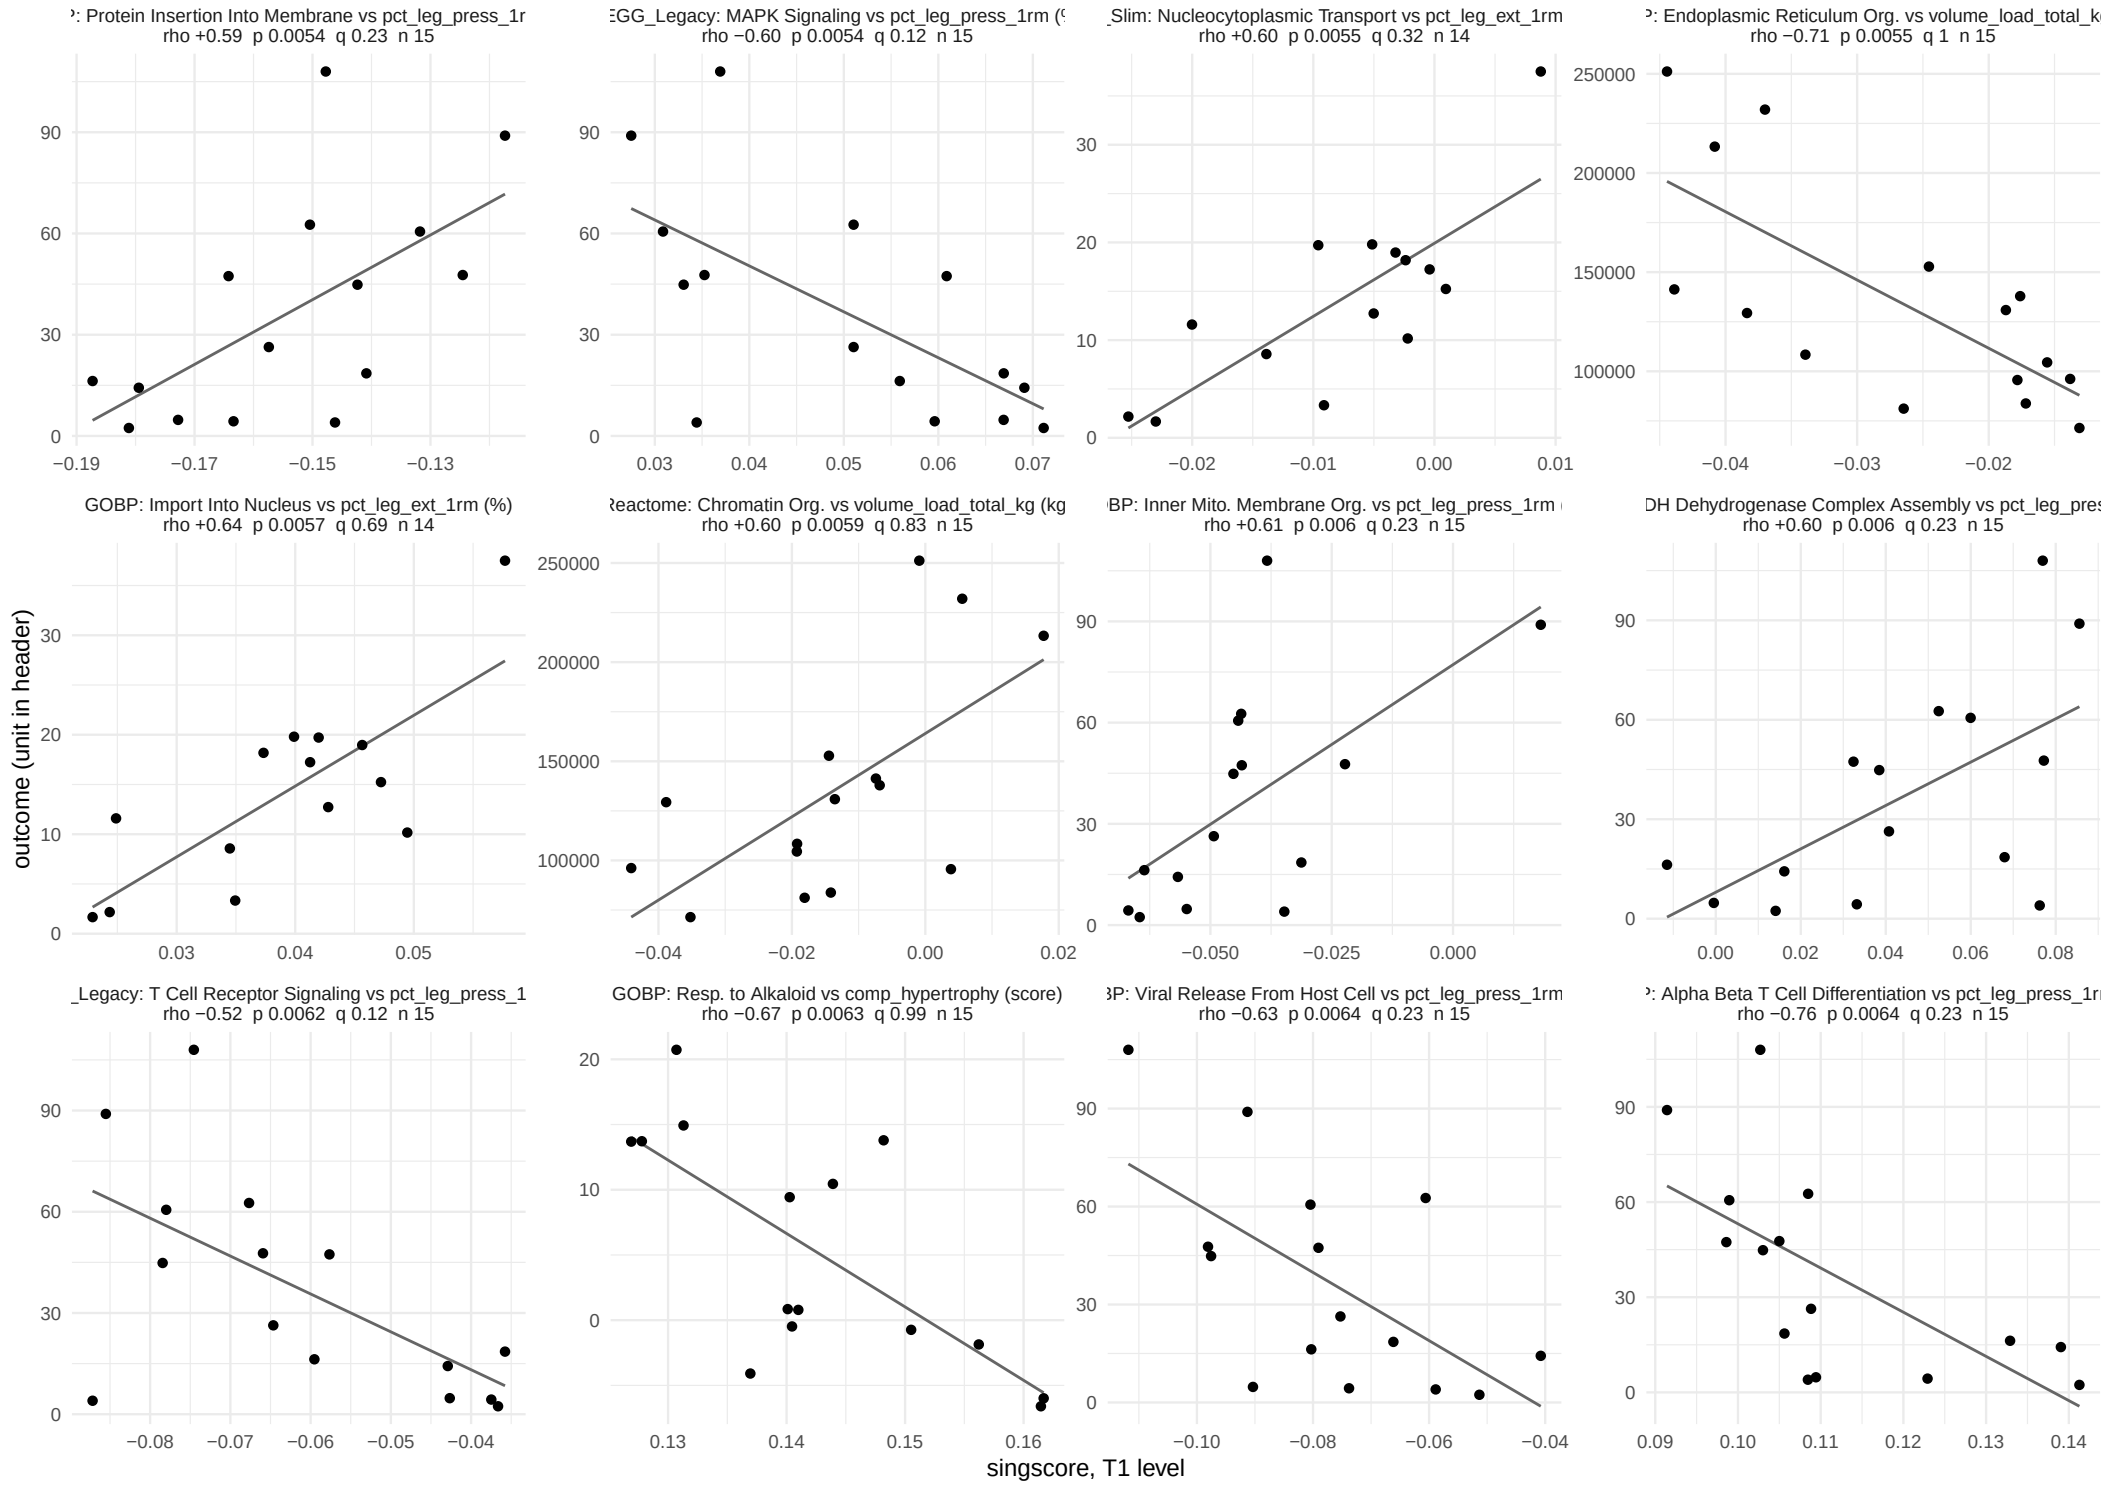

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, baseline window


439 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 5 of 37.

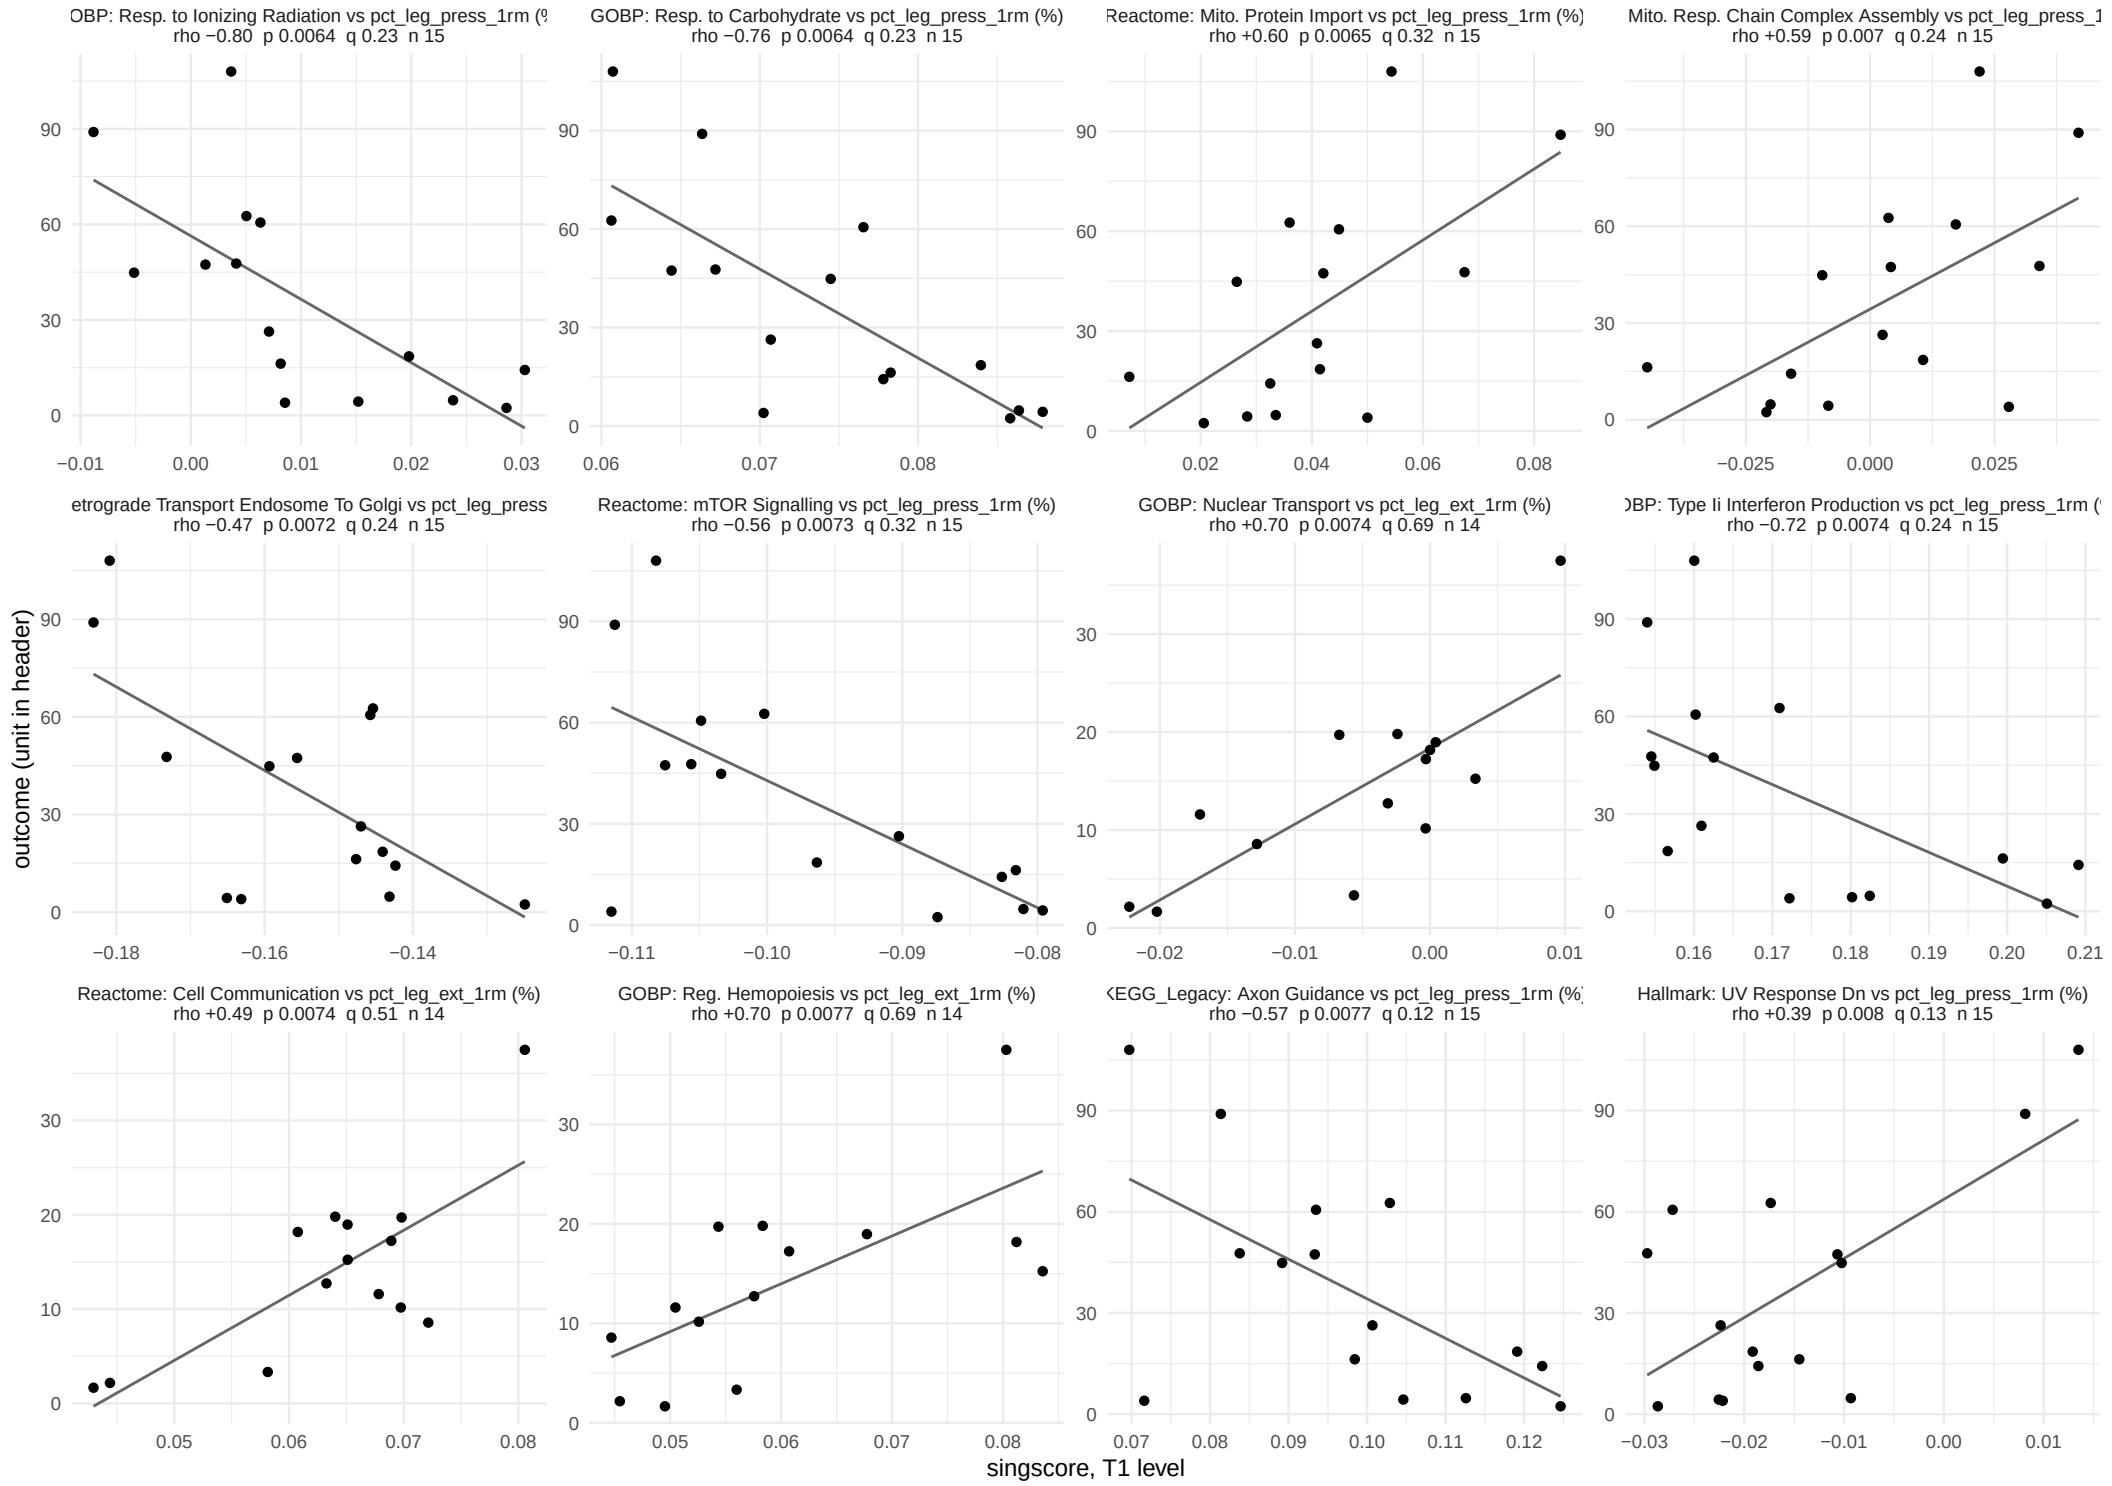

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, baseline window


439 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 6 of 37.

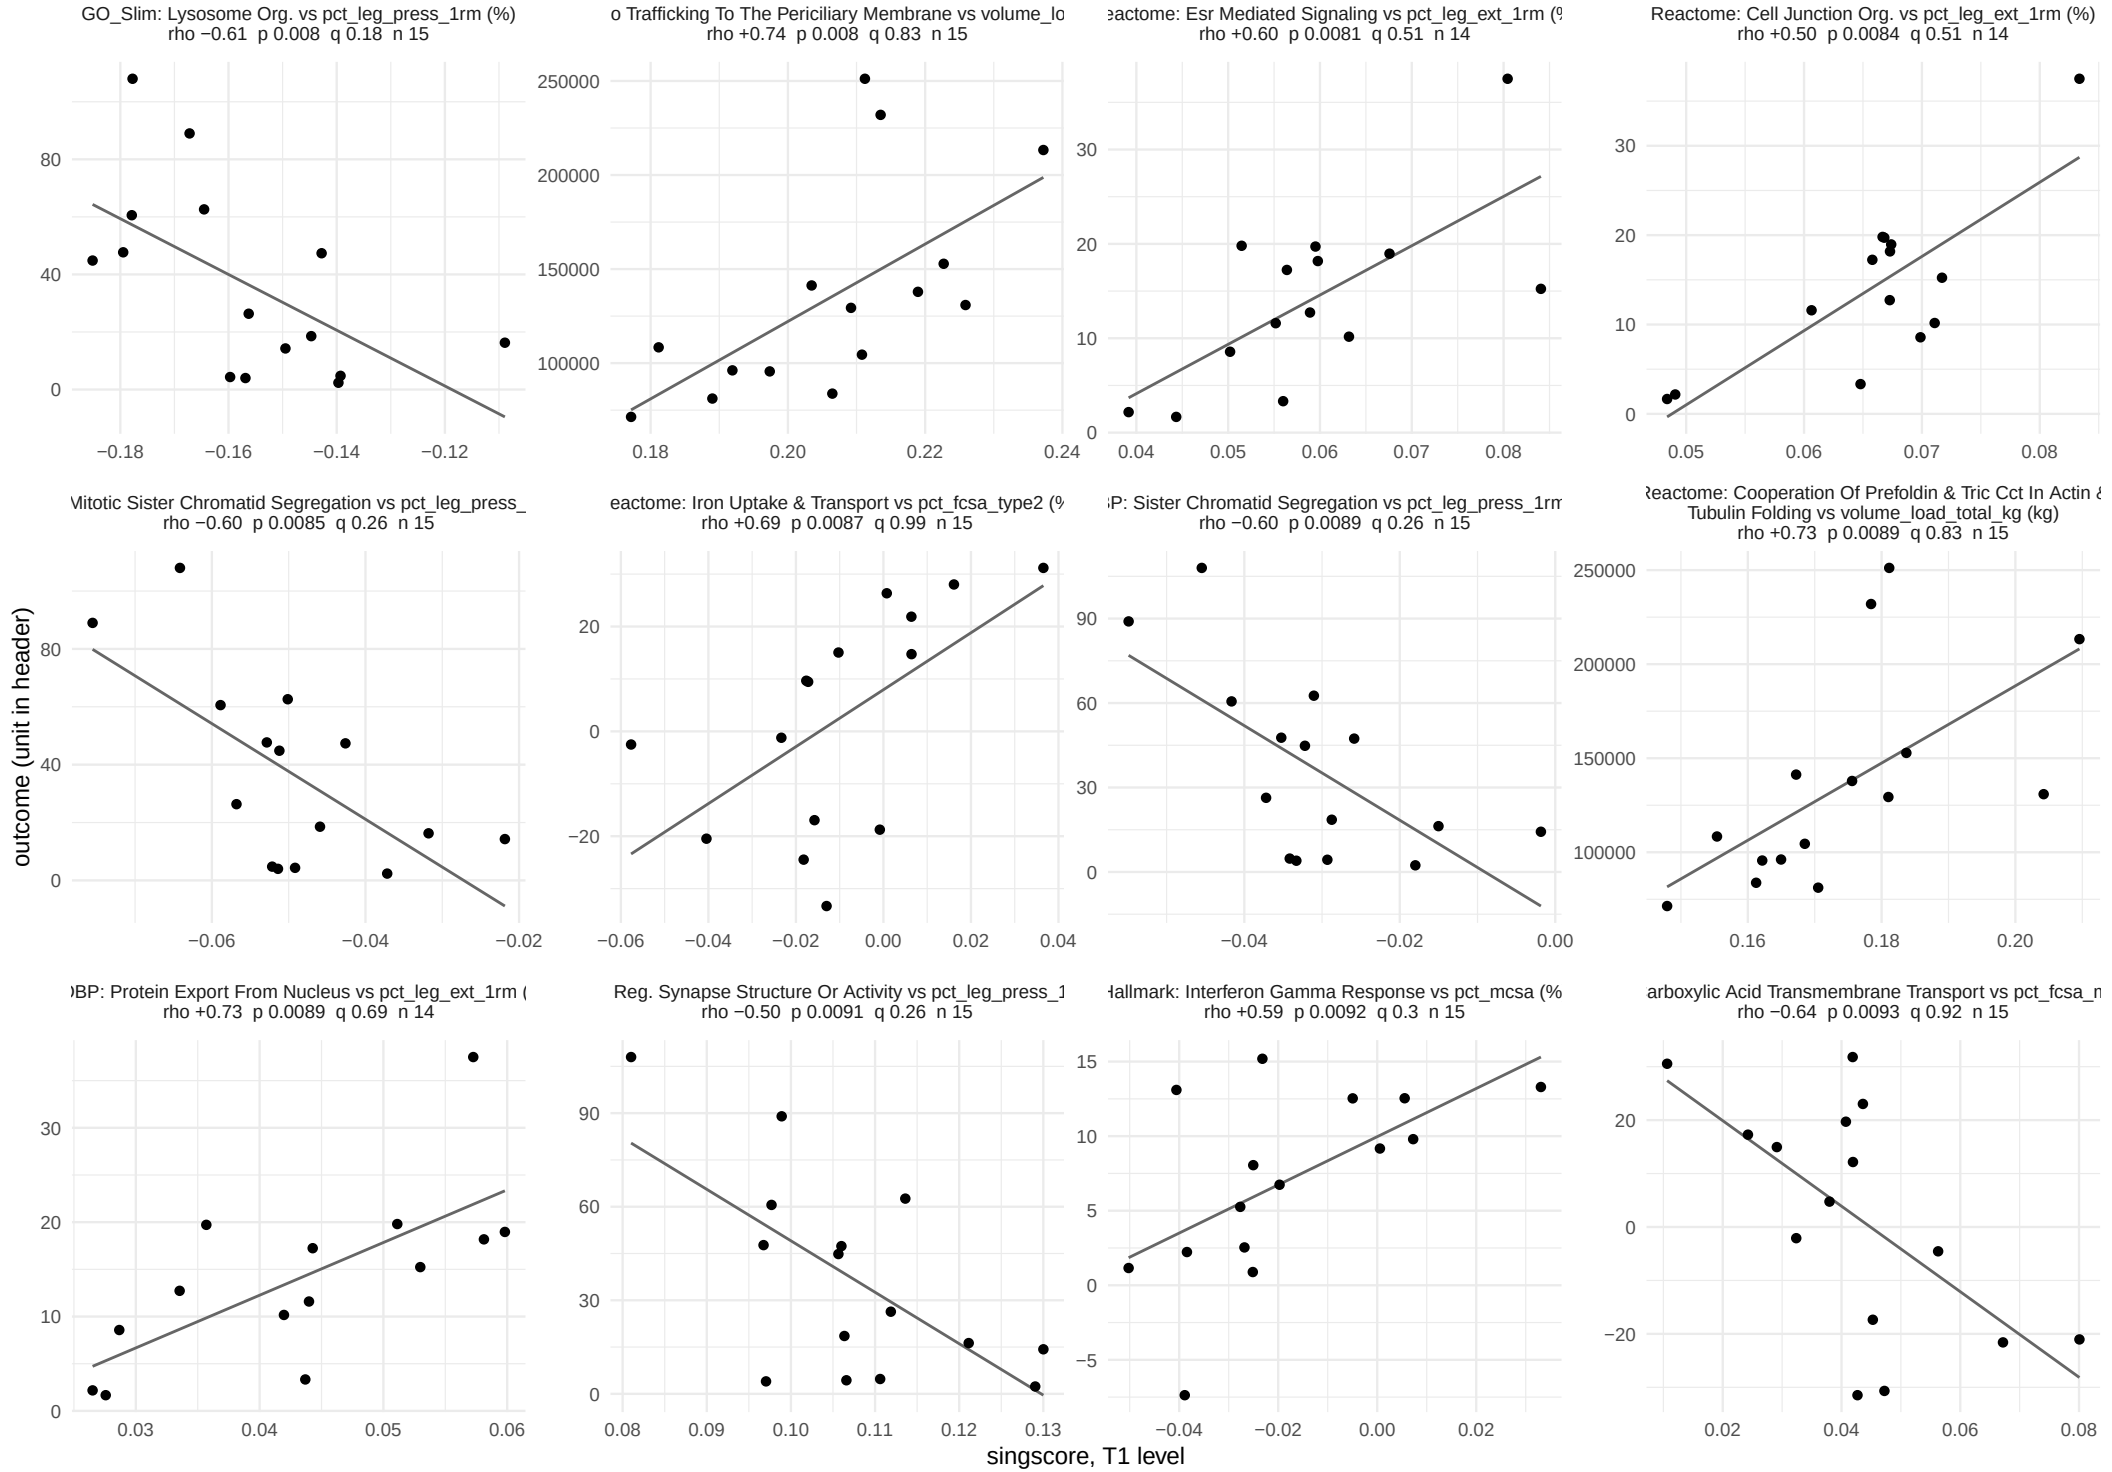

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, baseline window


439 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 7 of 37.

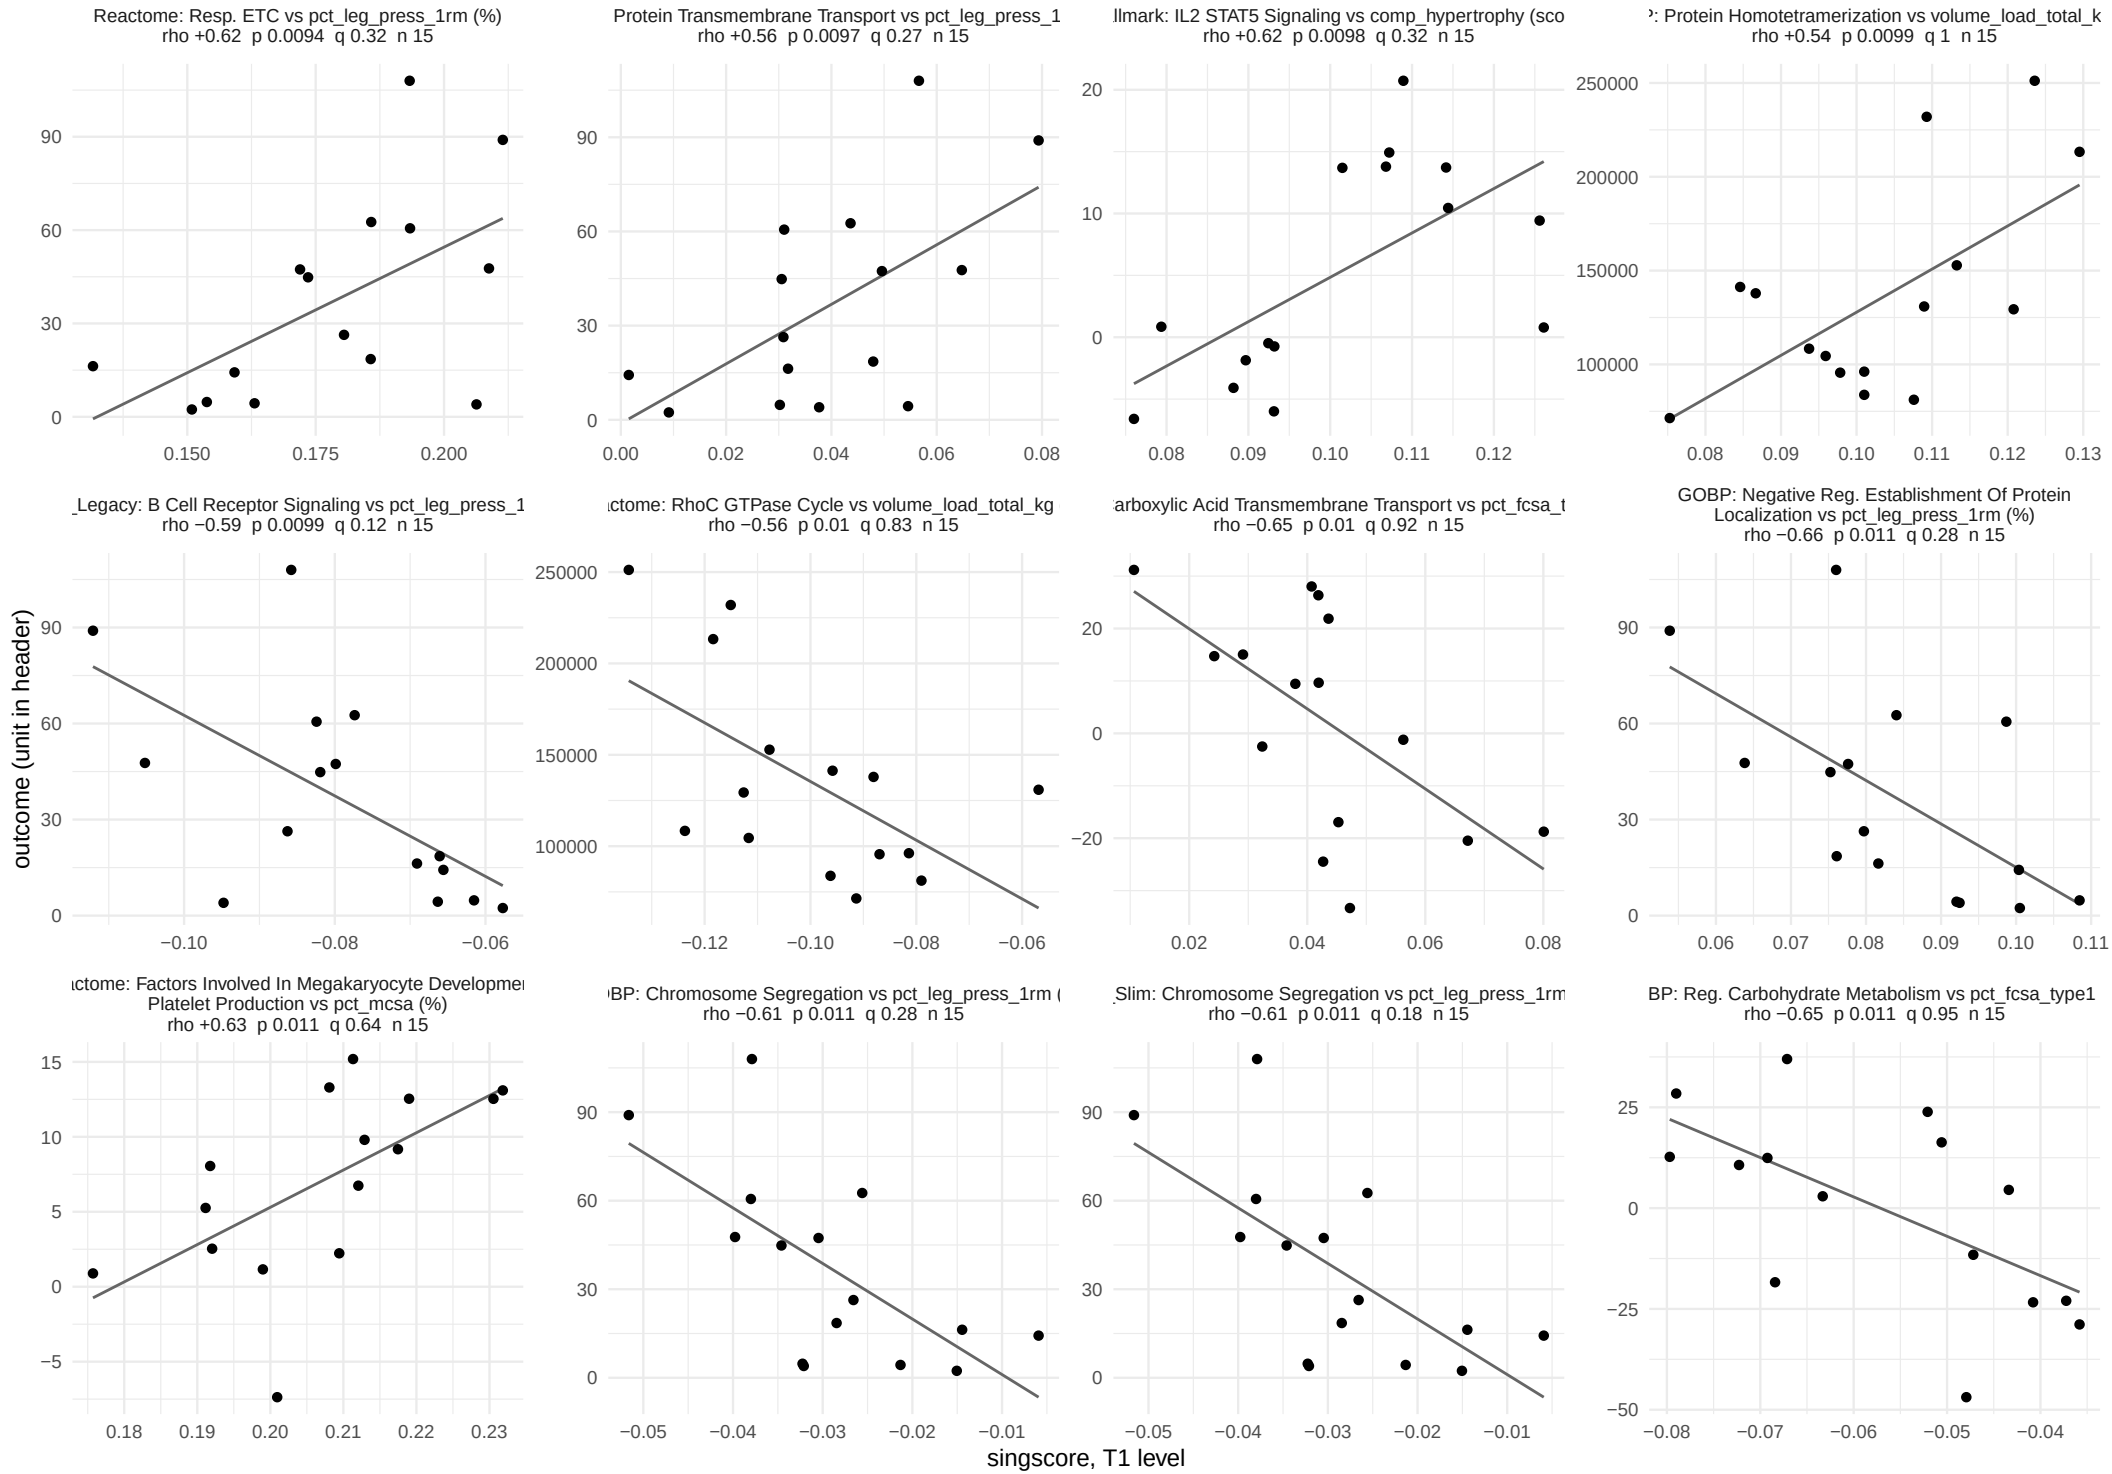

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, baseline window


439 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 8 of 37.

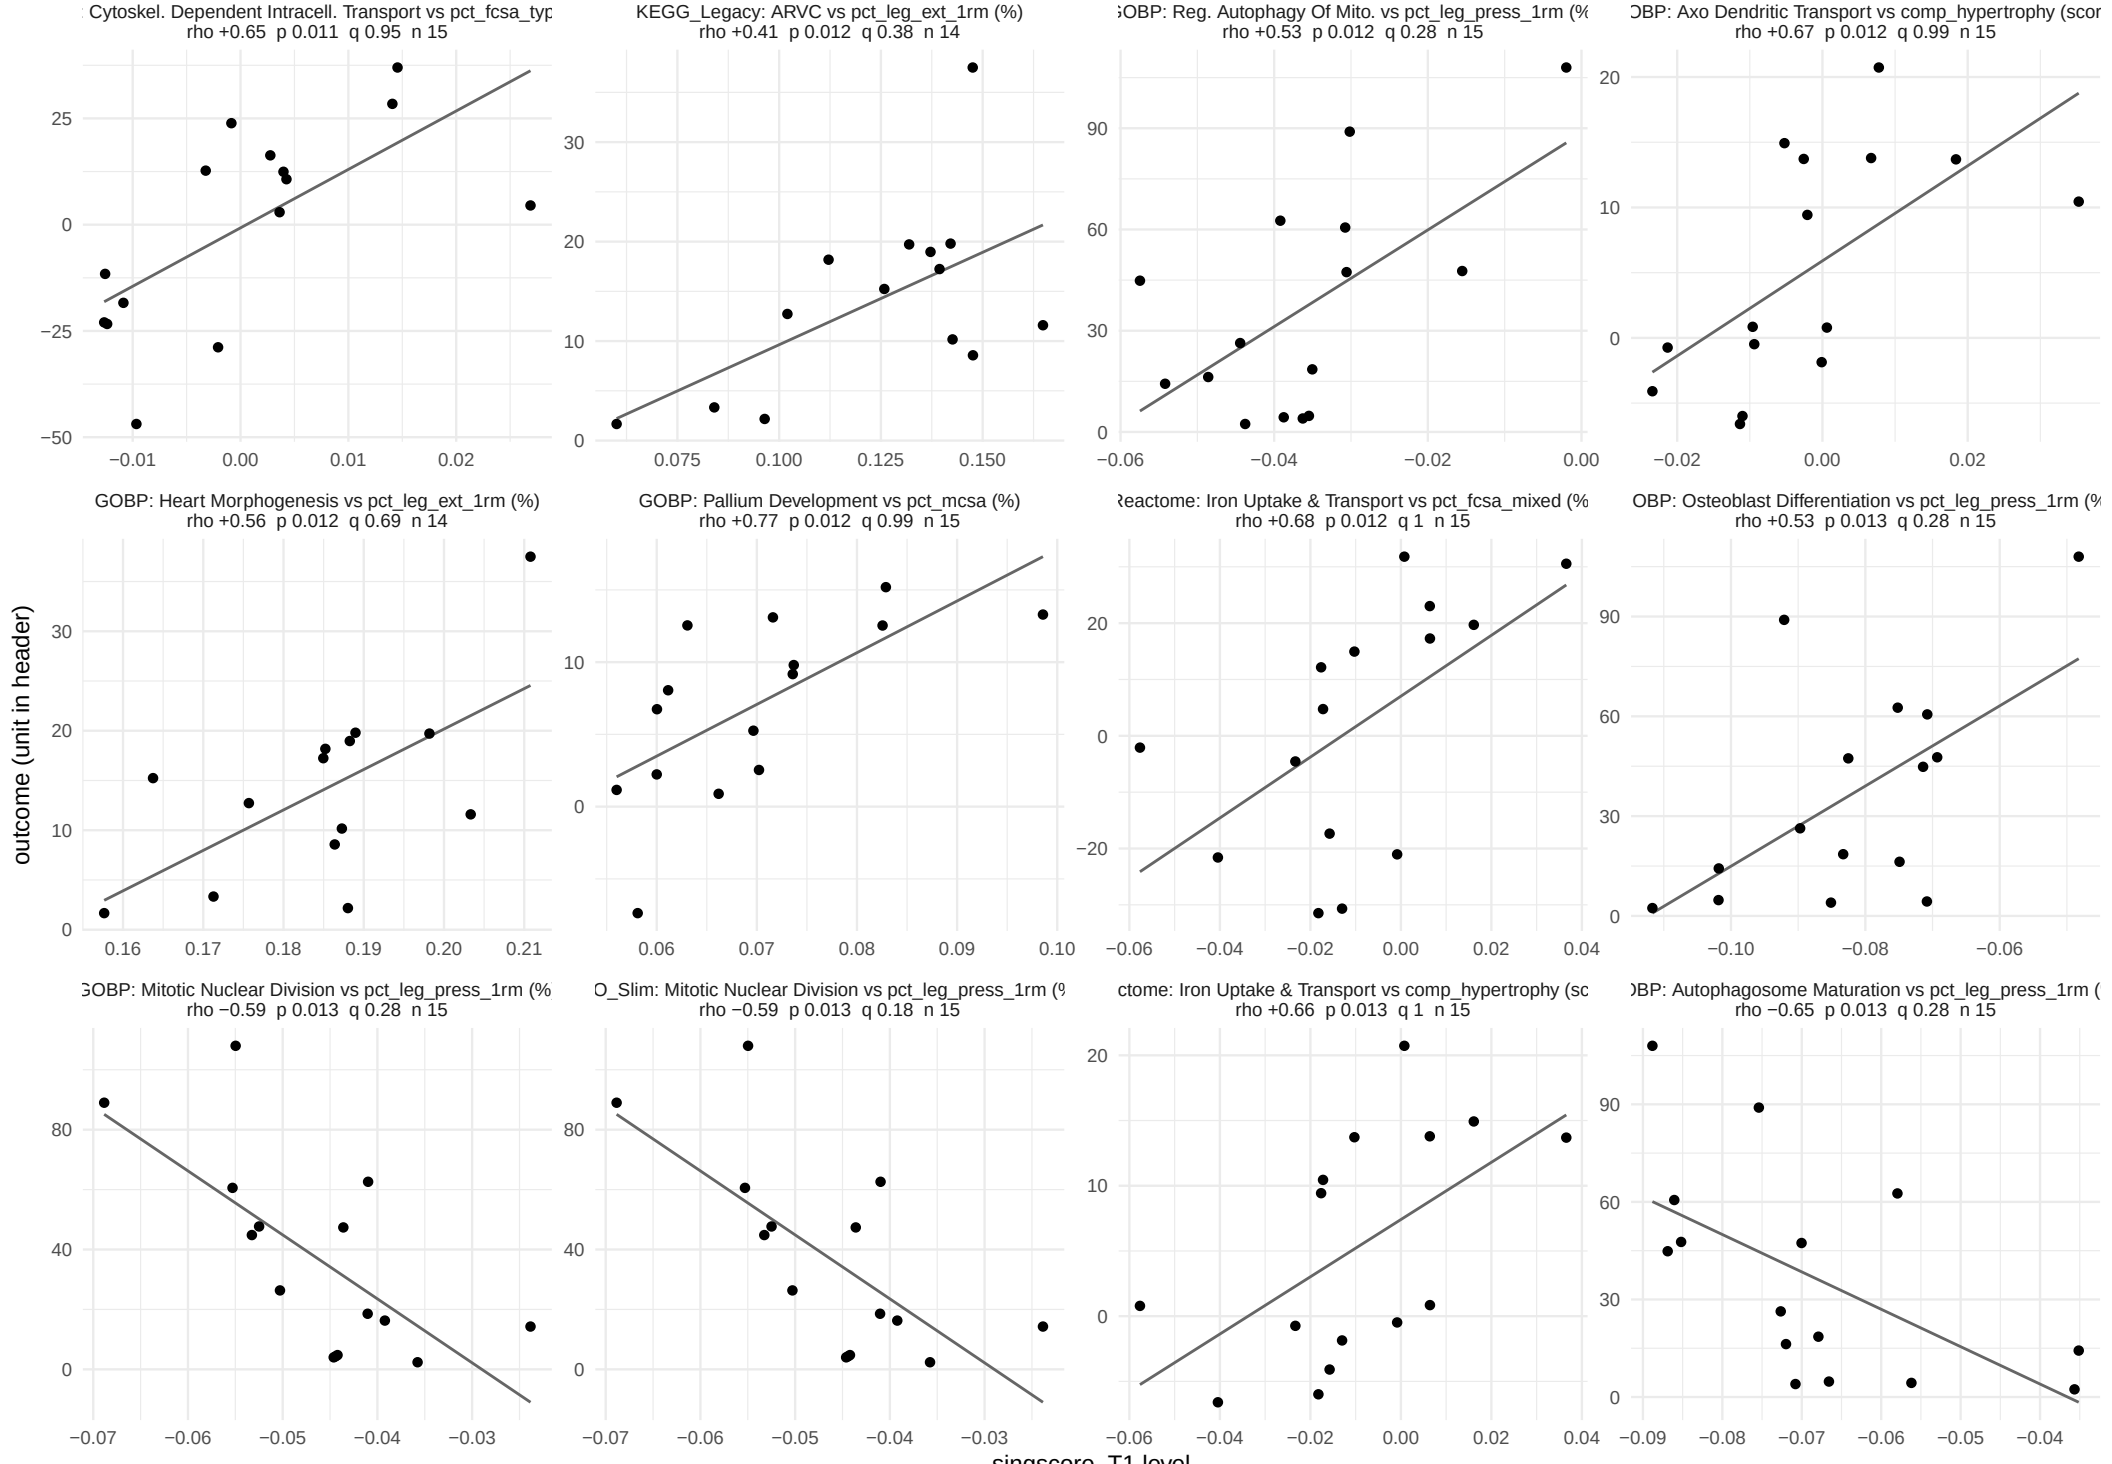

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, baseline window


439 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 9 of 37.

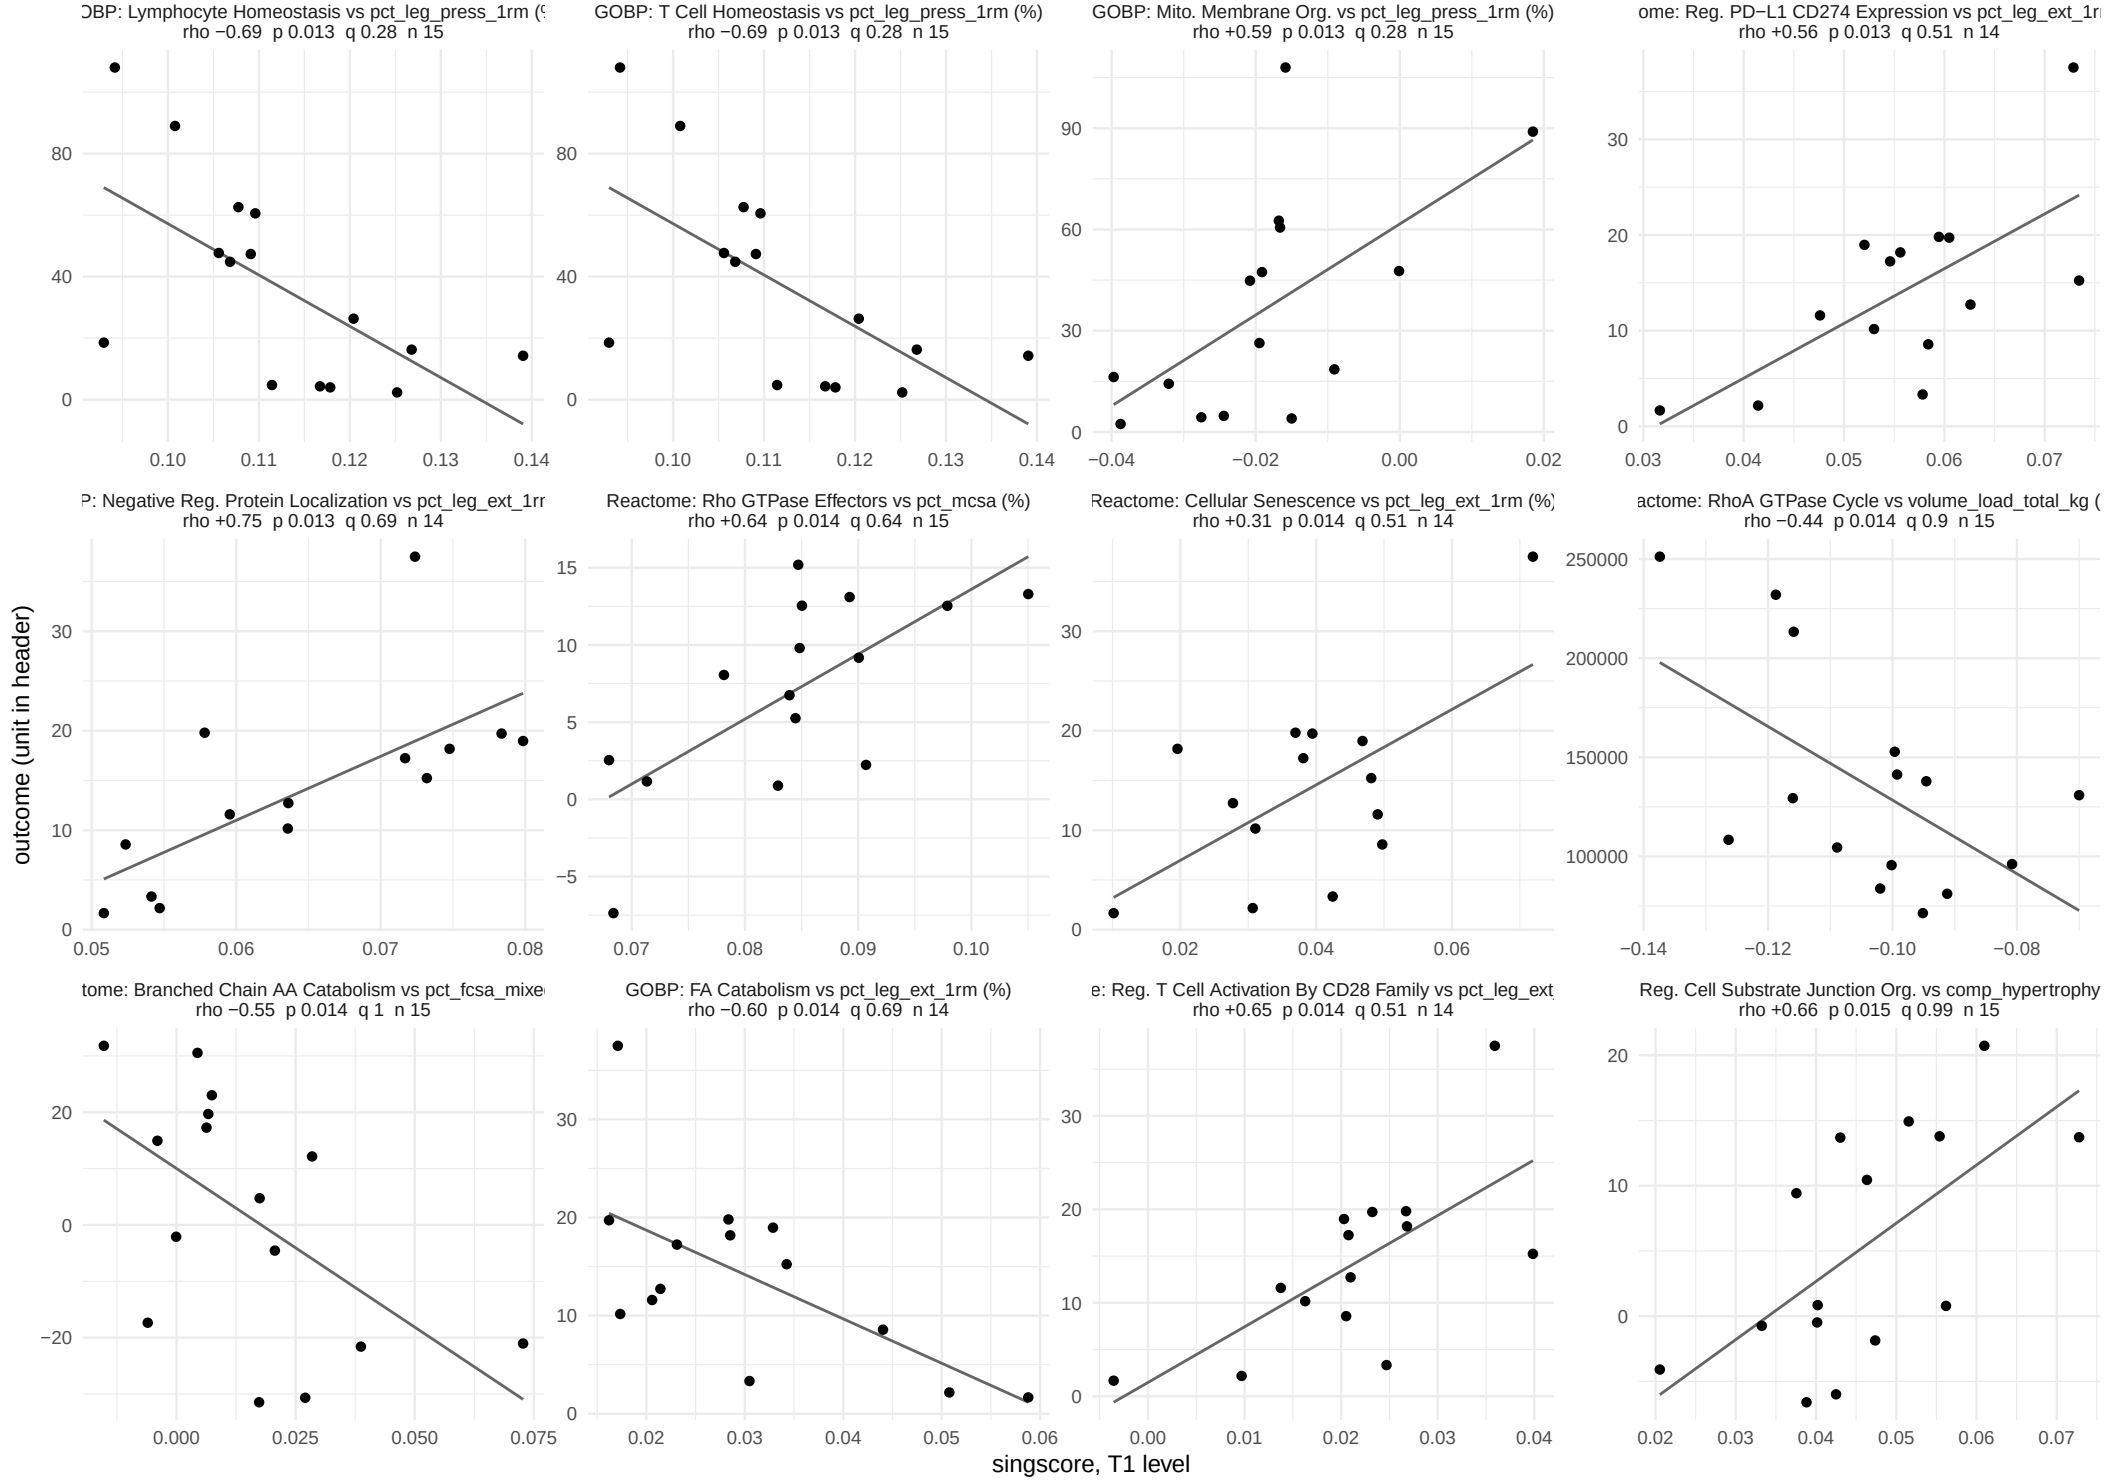

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, baseline window


439 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 10 of 37.

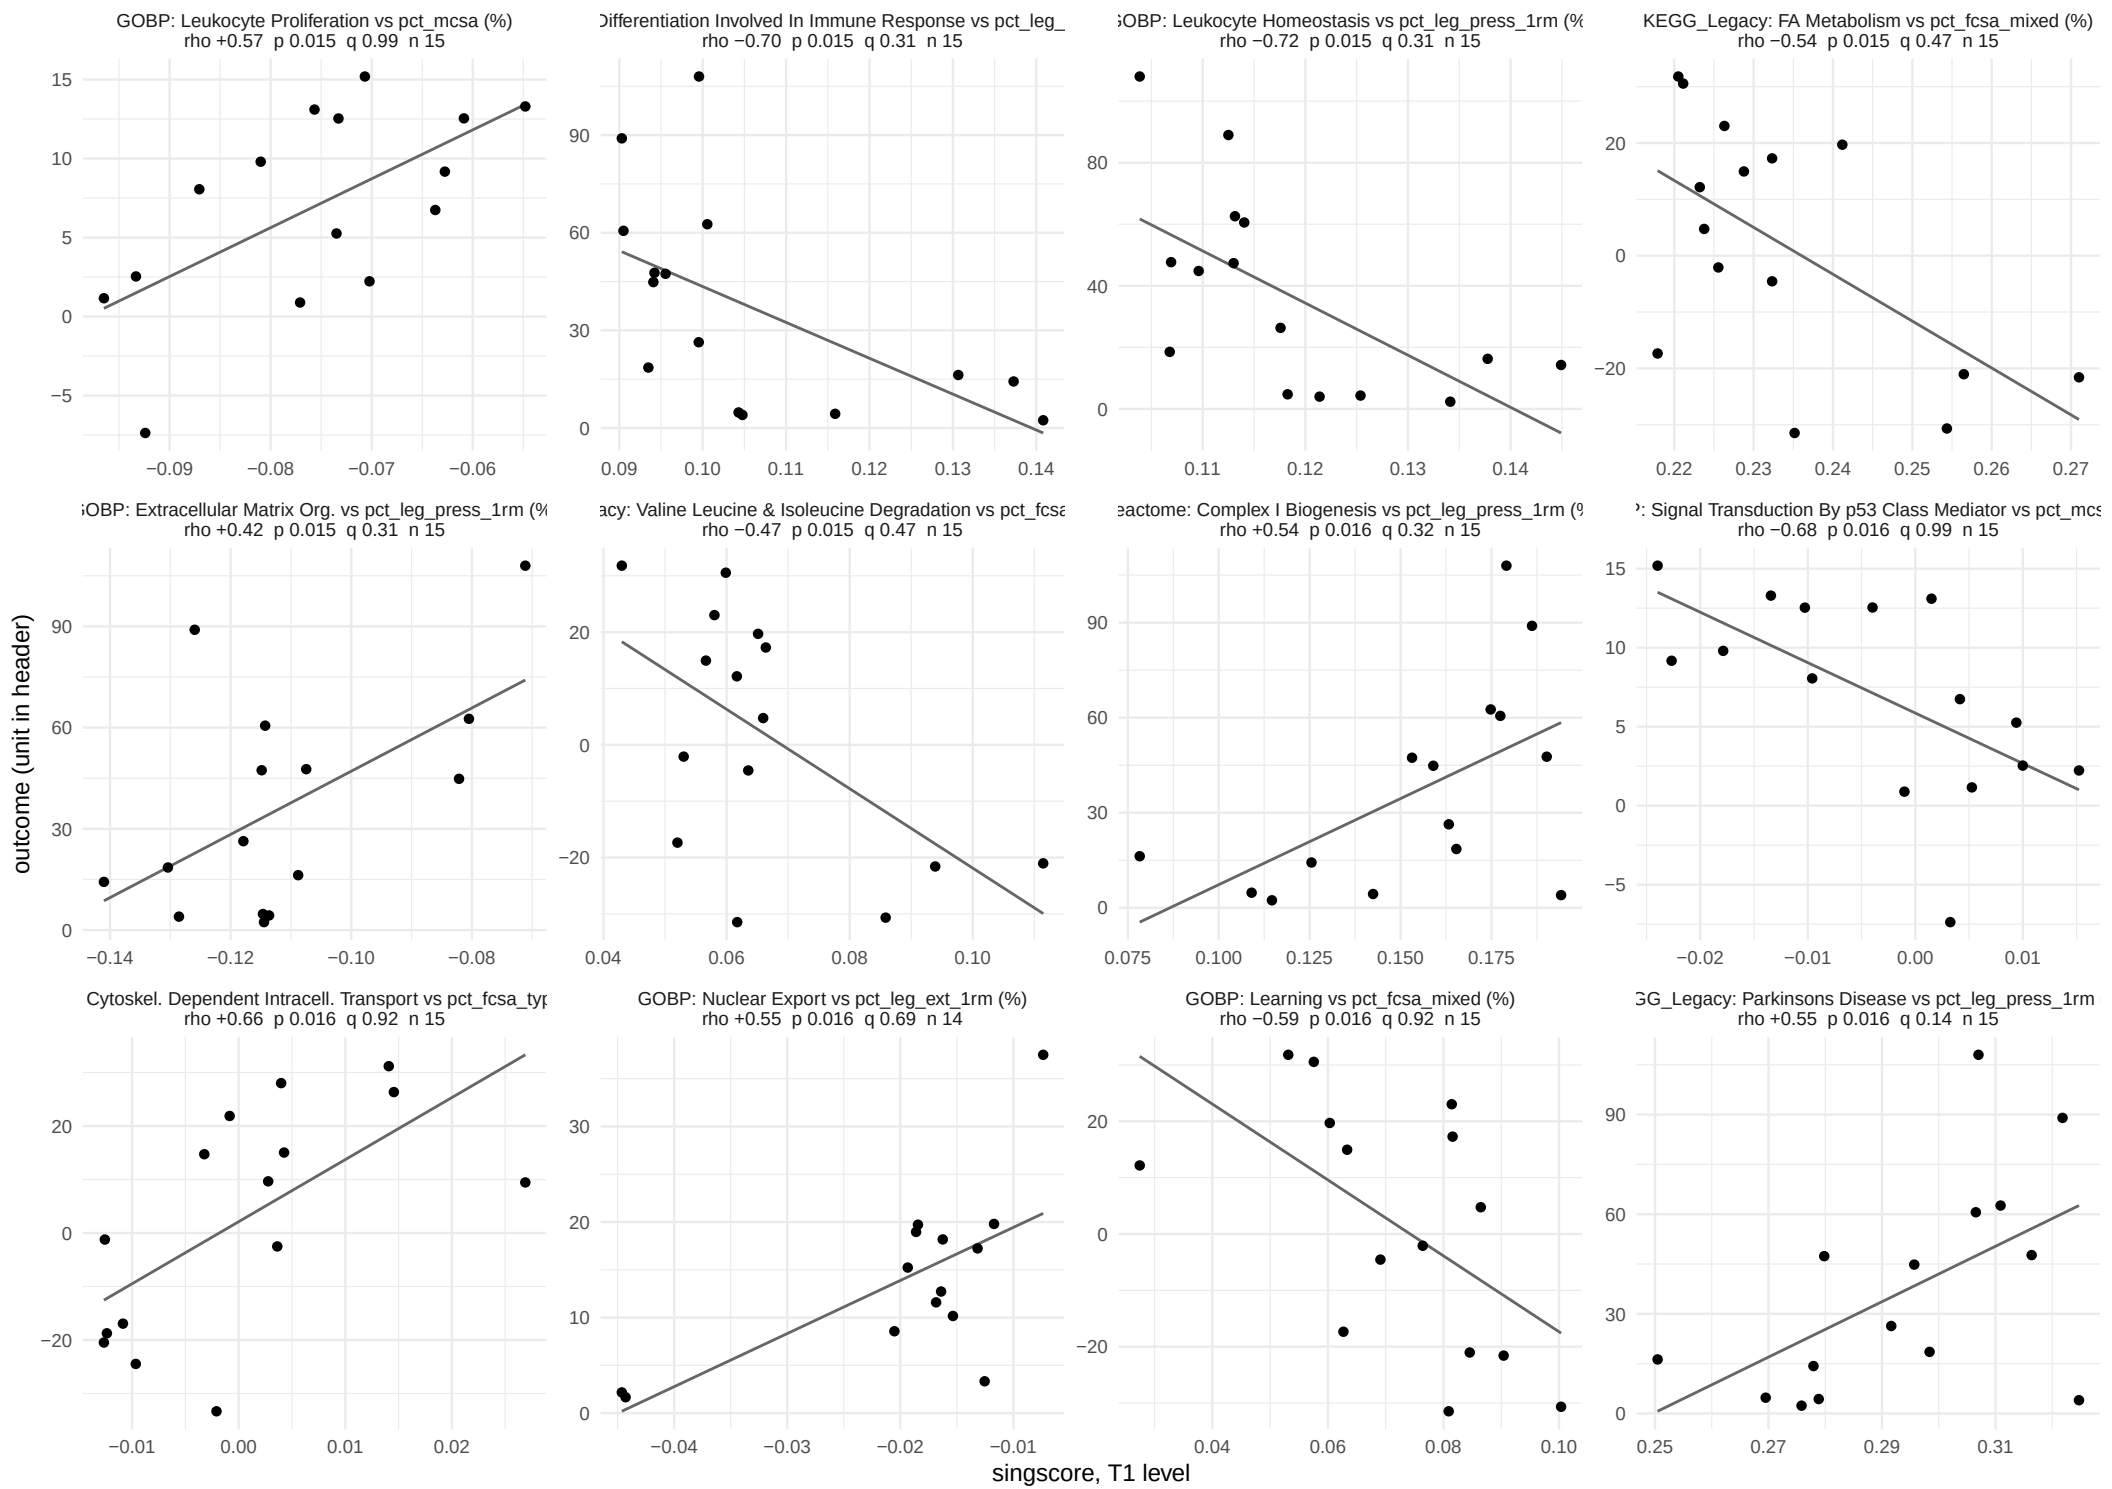

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, baseline window


439 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 11 of 37.

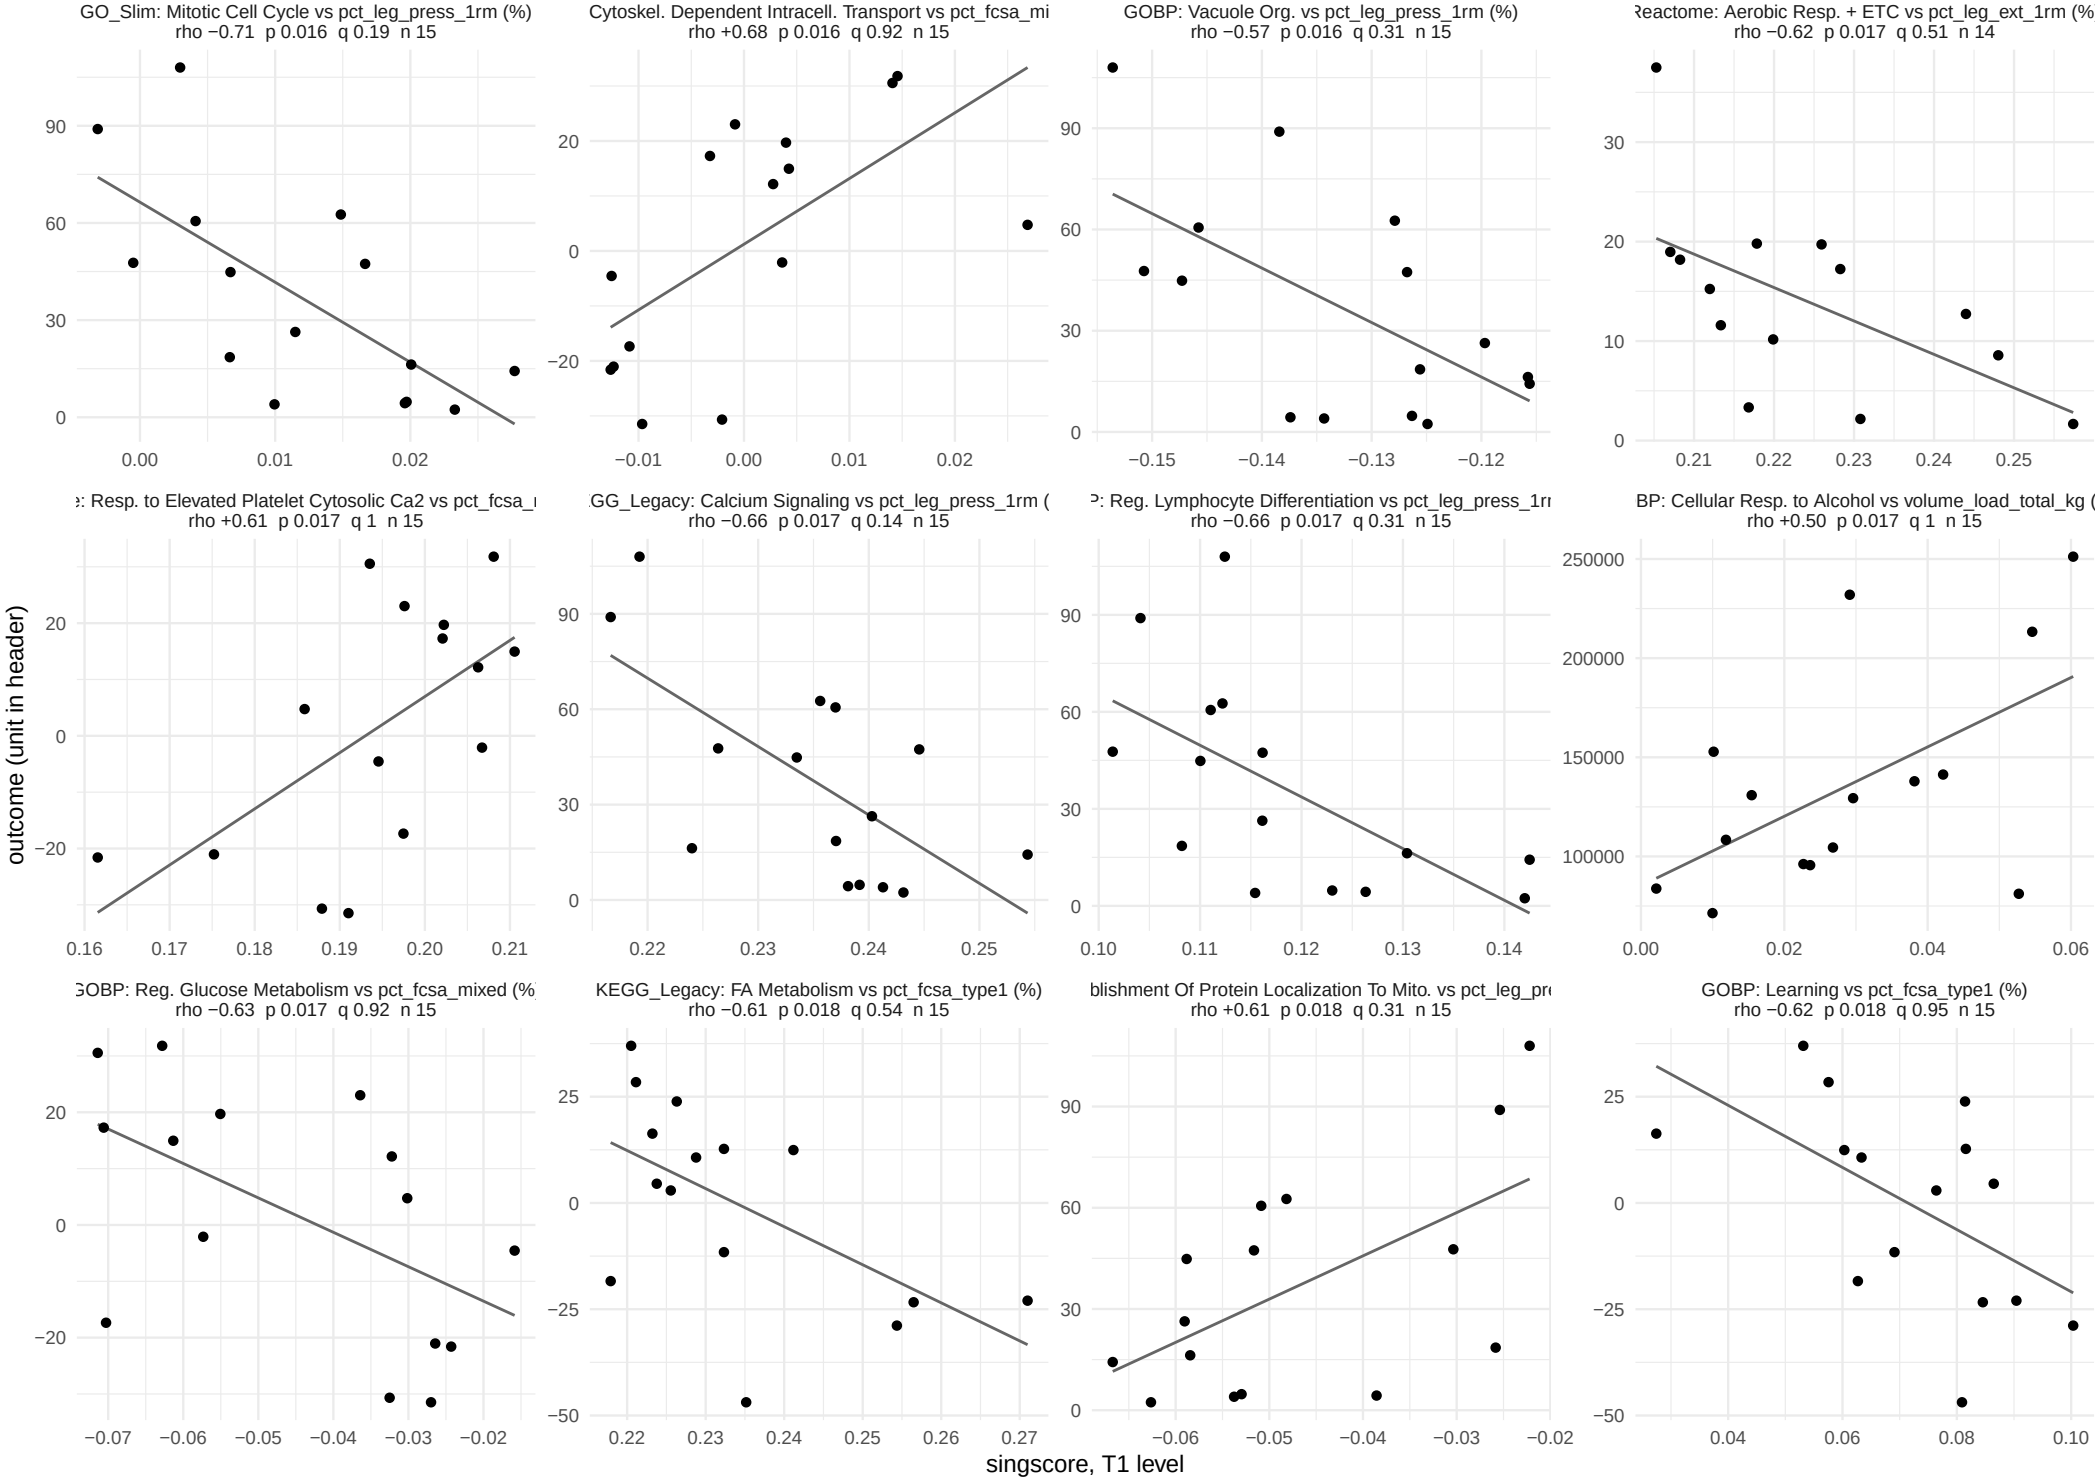

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, baseline window


439 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 12 of 37.

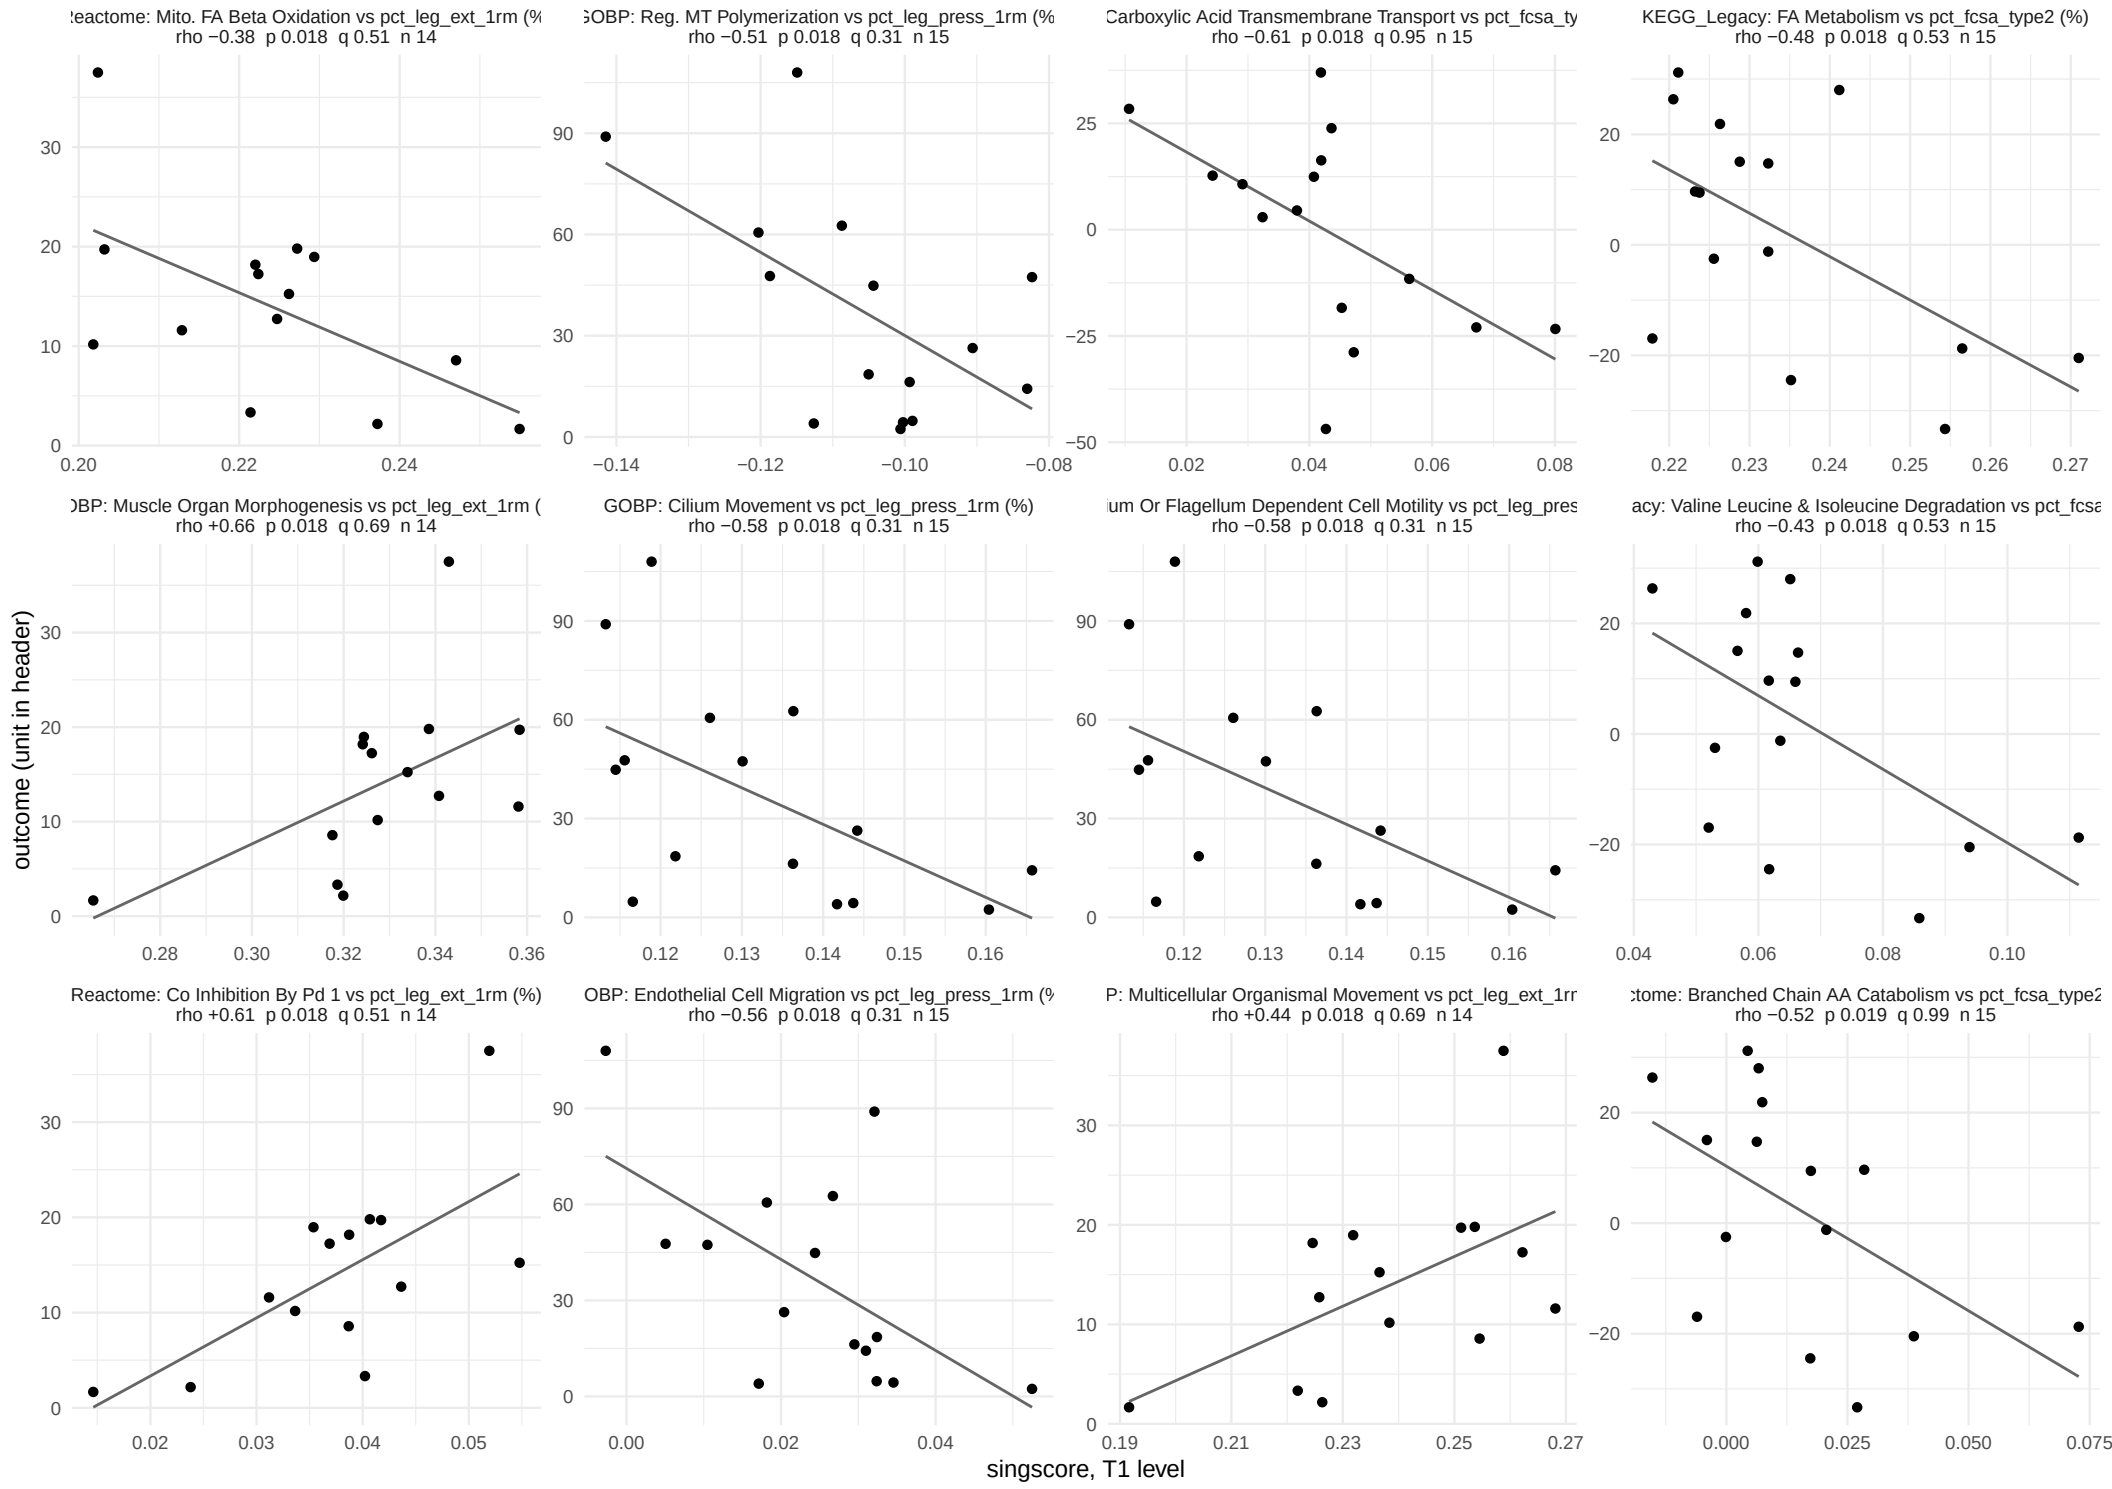

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, baseline window


439 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 13 of 37.

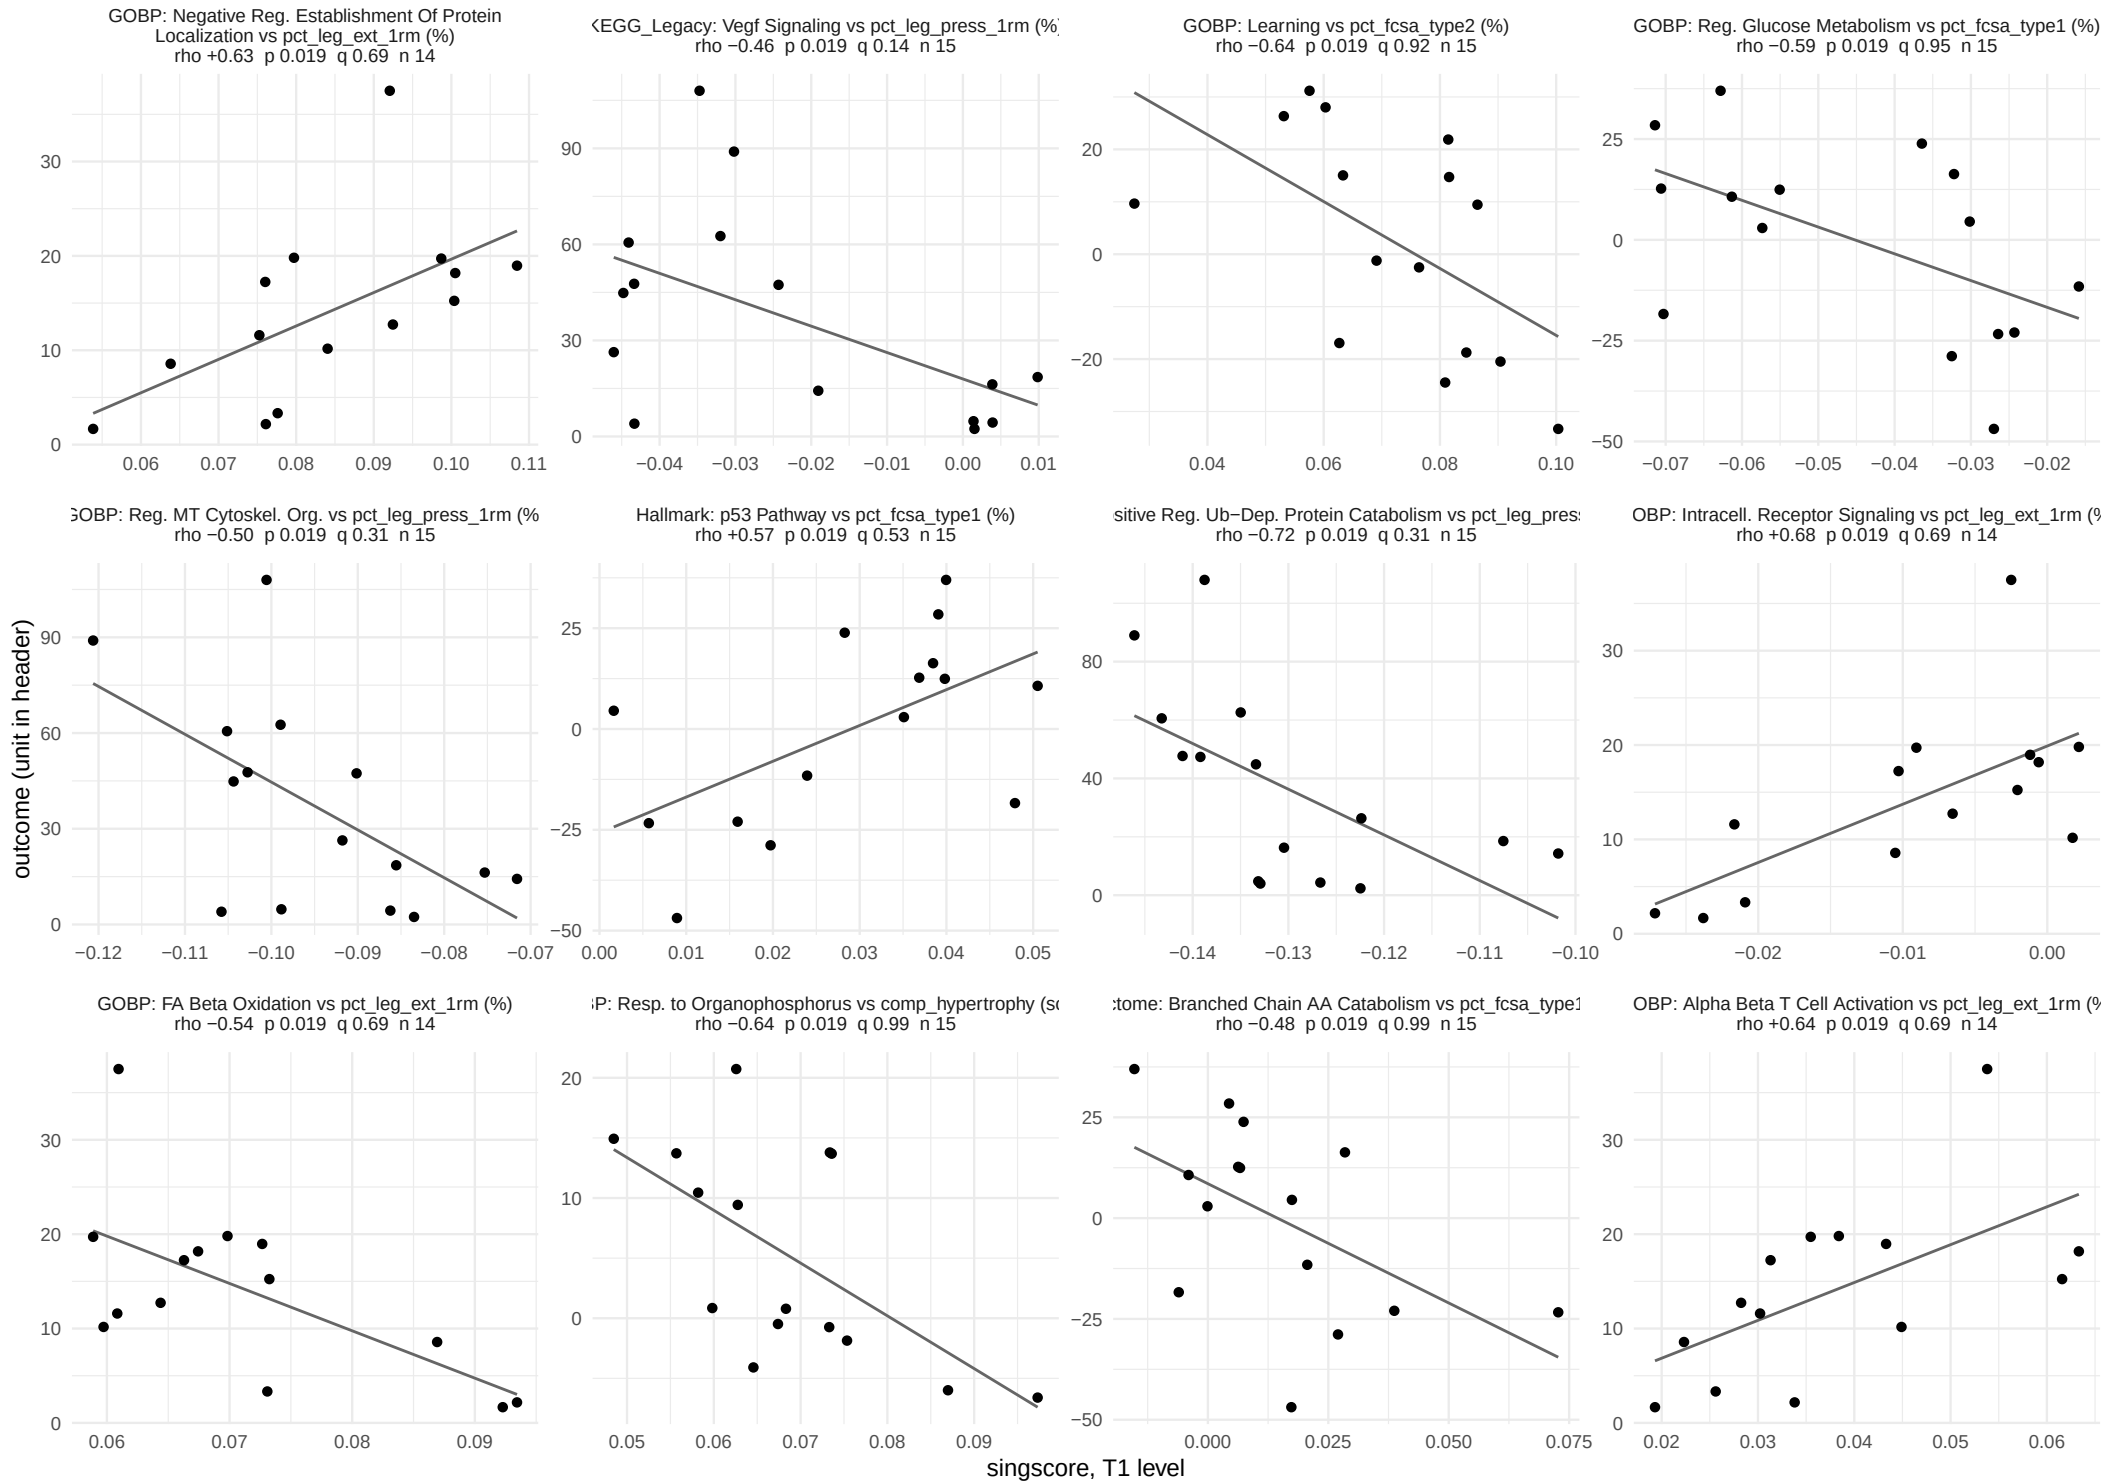

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, baseline window


439 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 14 of 37.

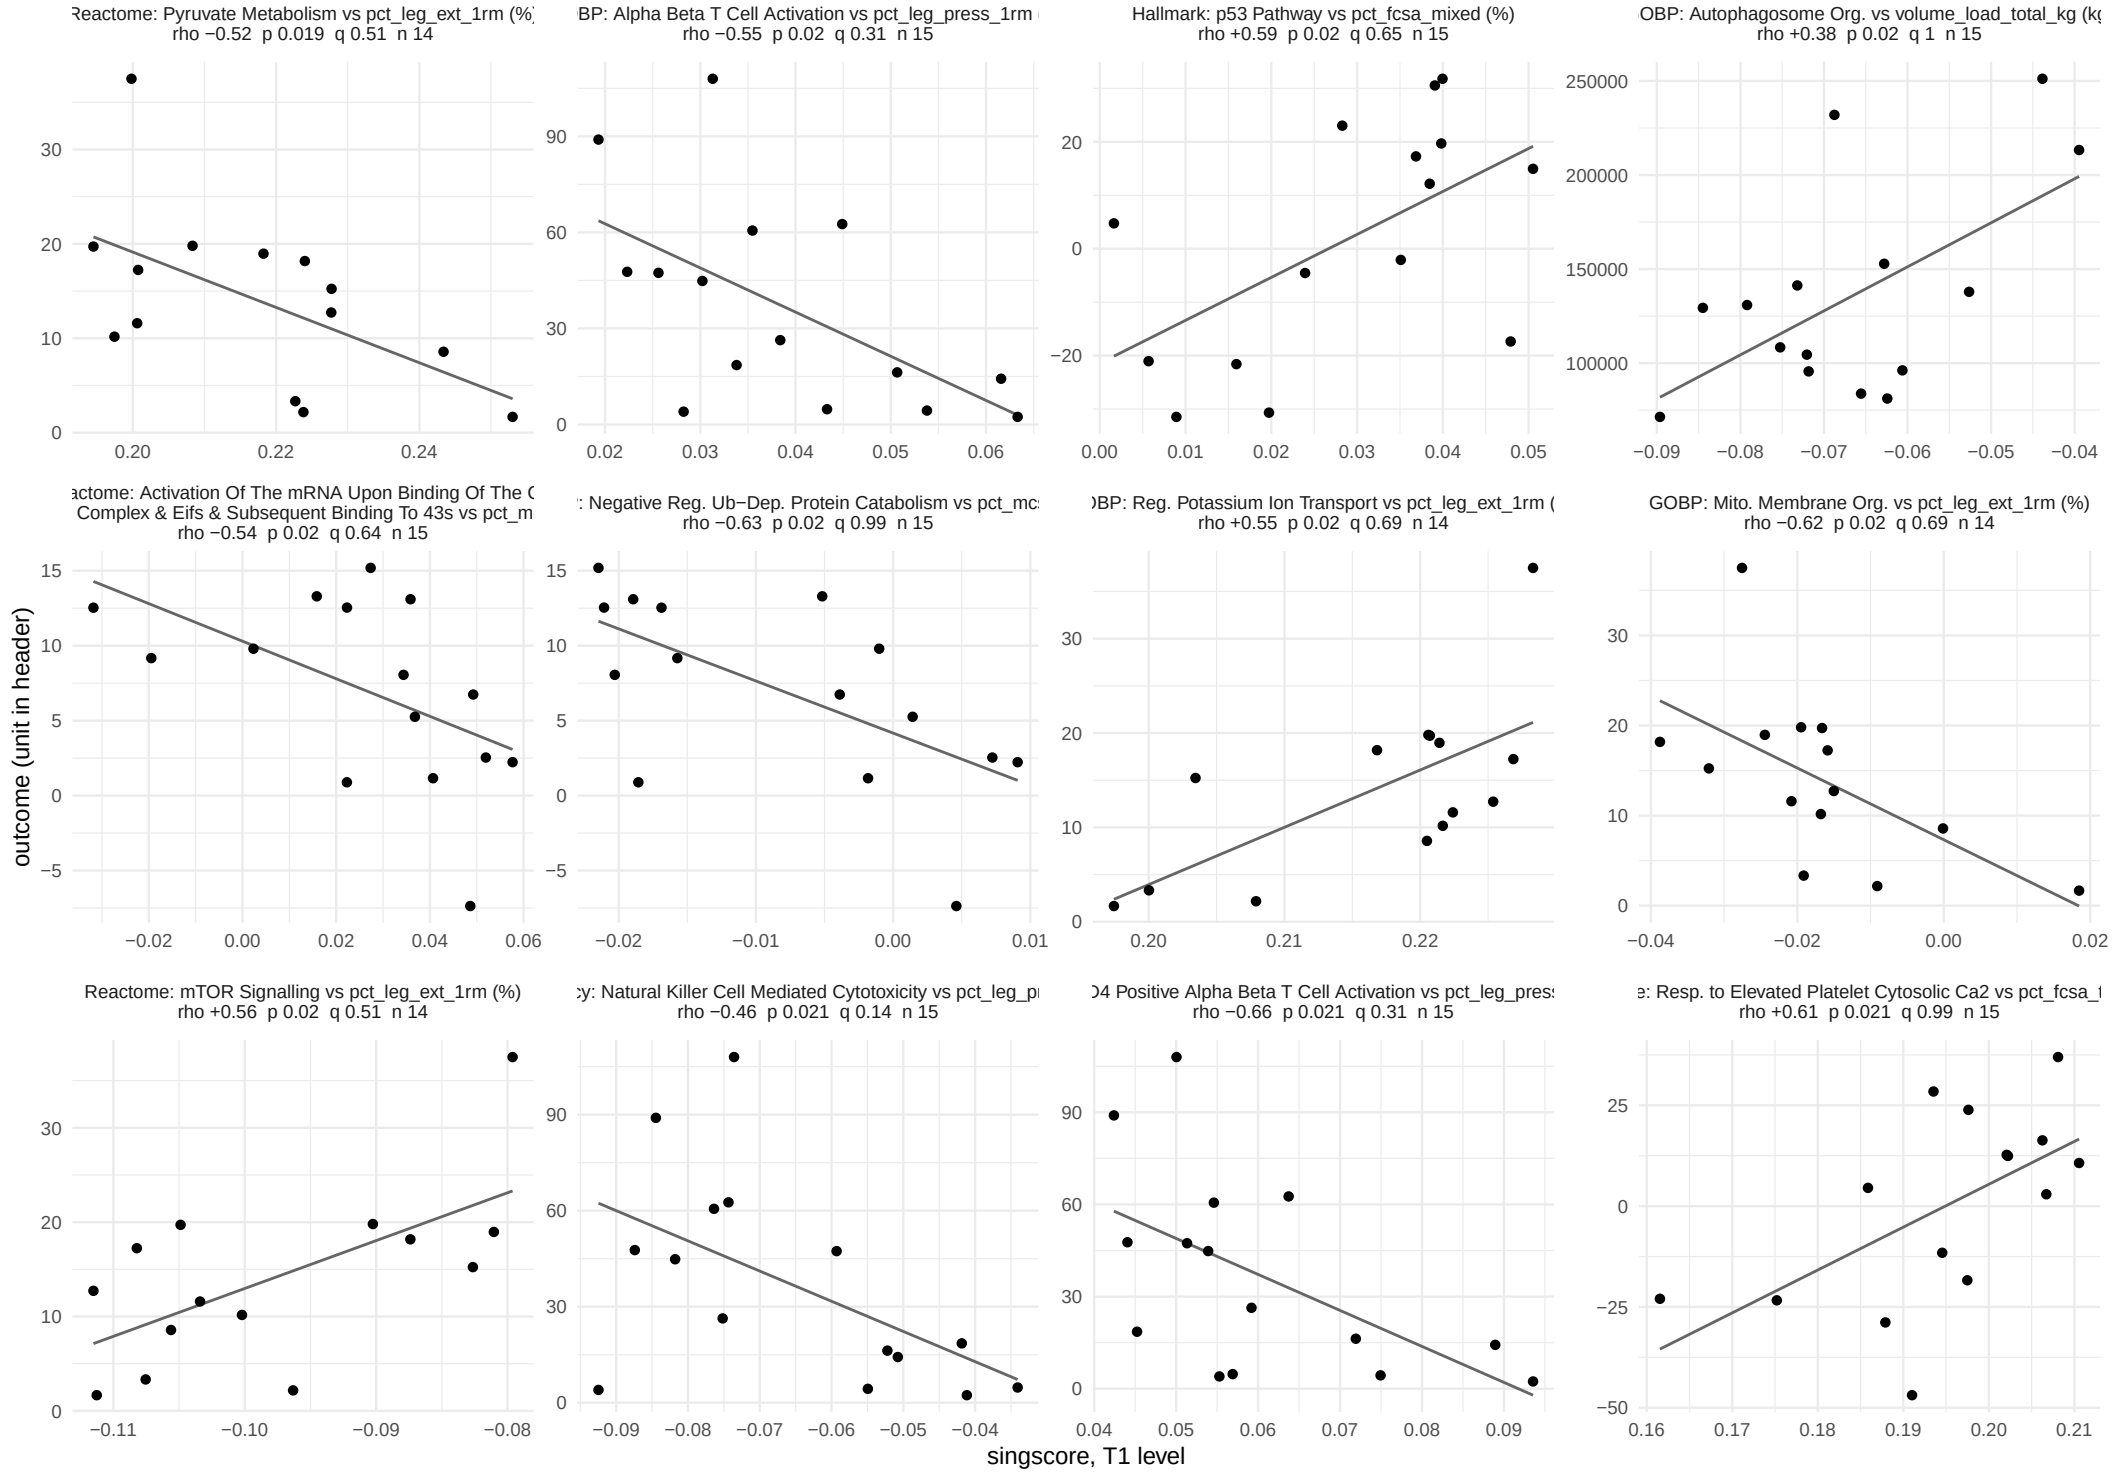

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, baseline window


439 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 15 of 37.

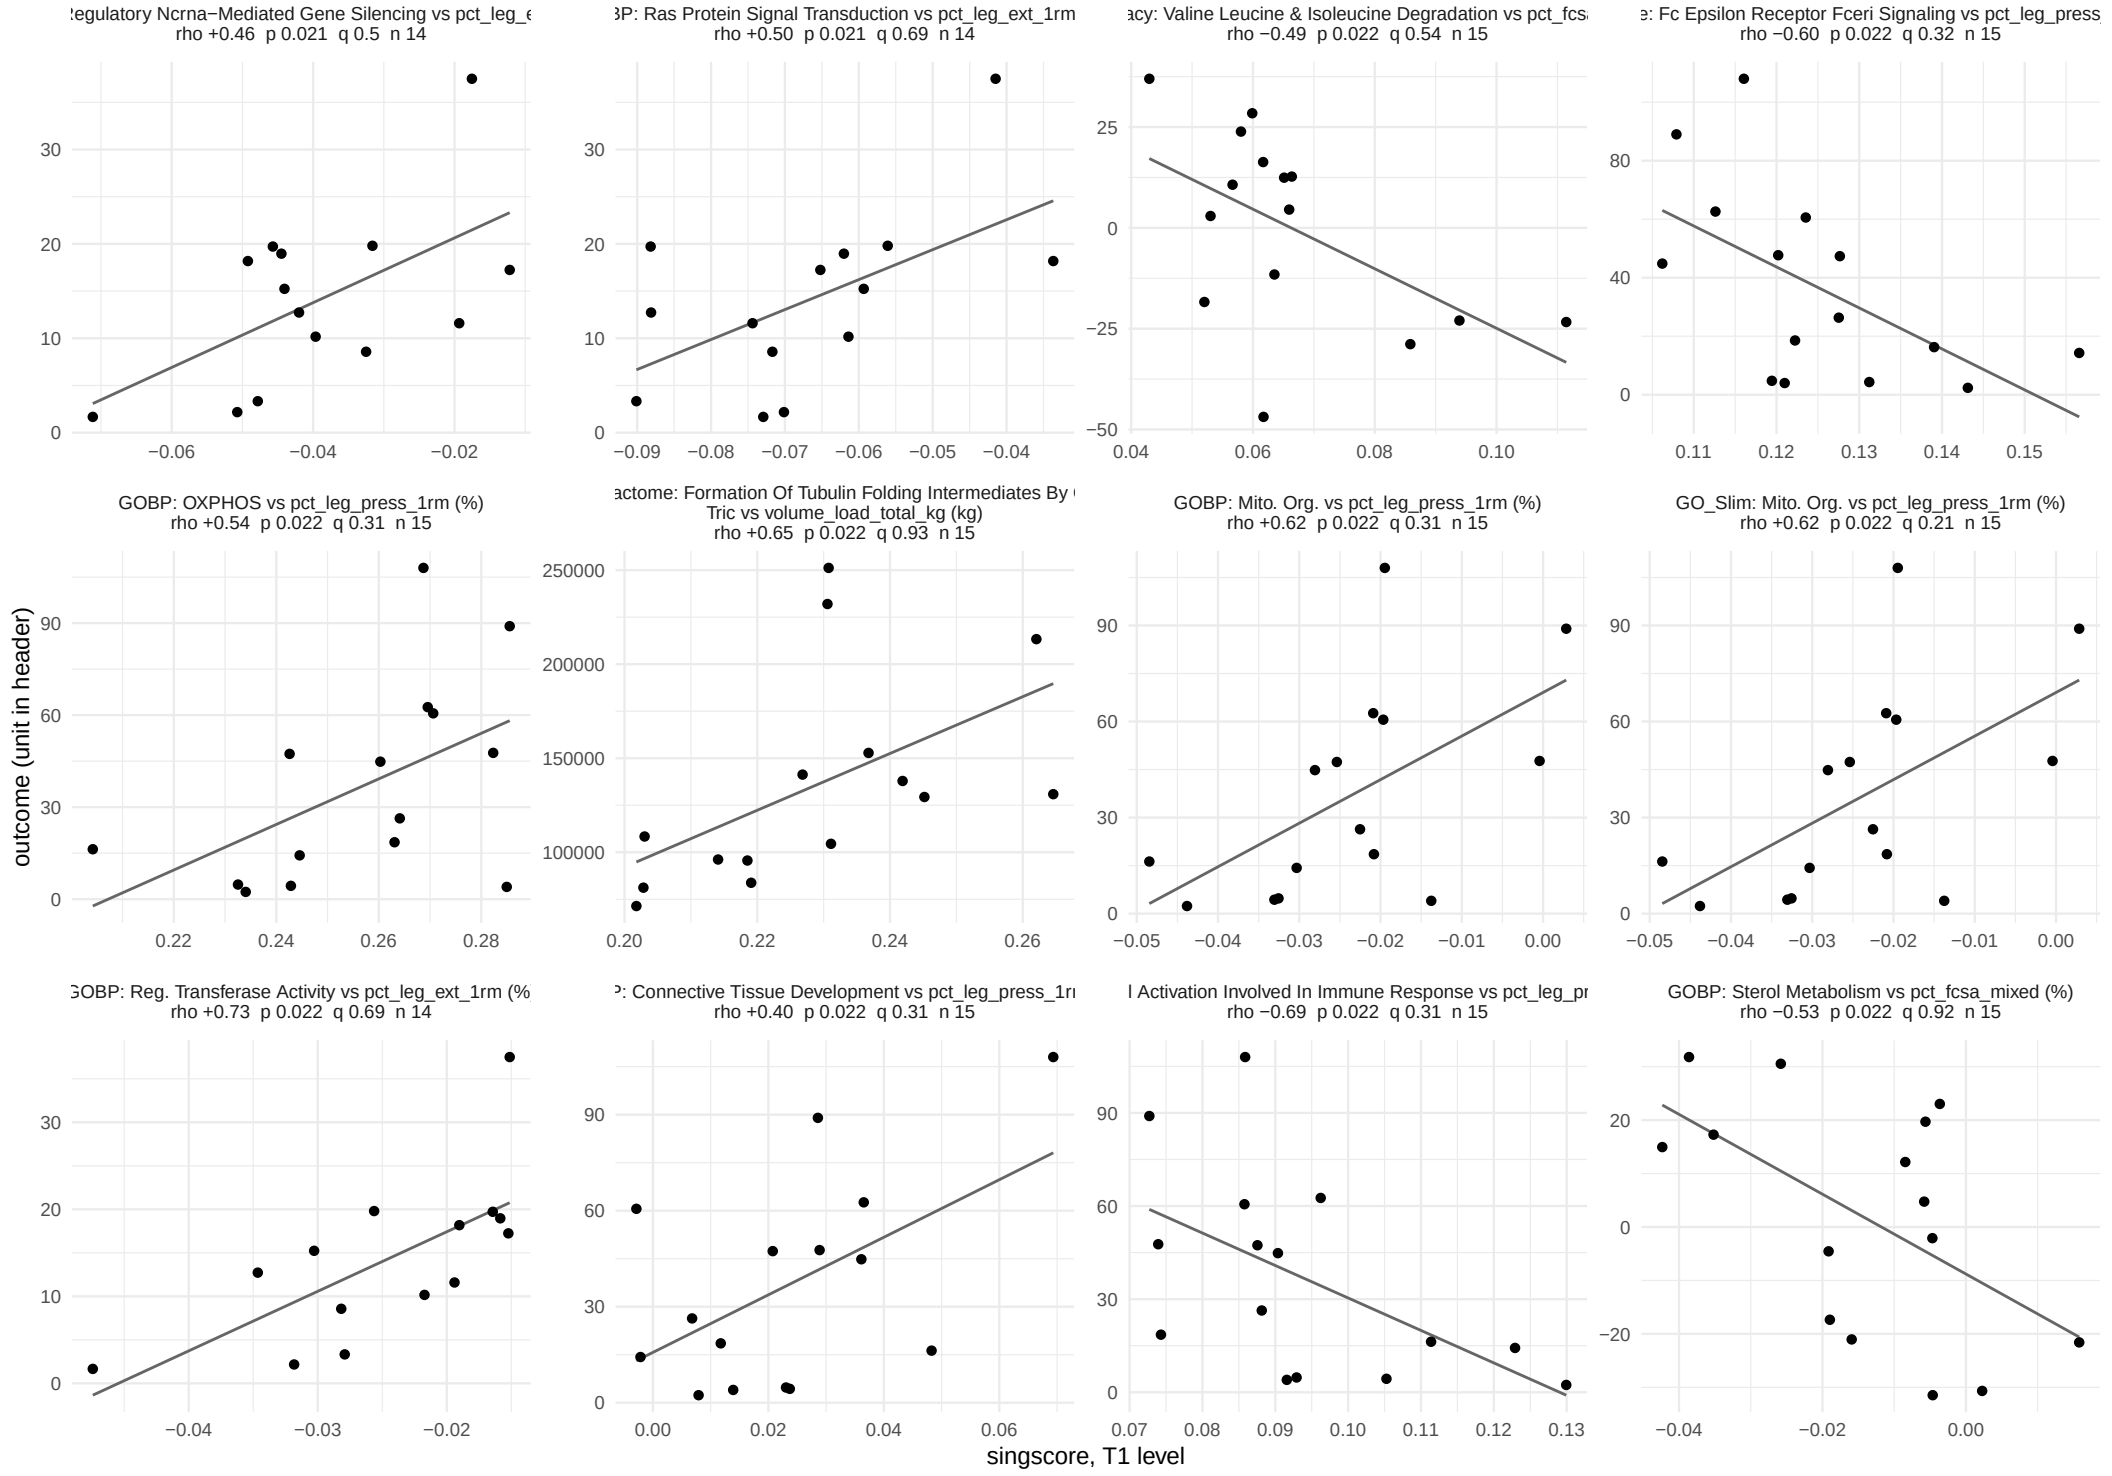

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, baseline window


439 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 16 of 37.

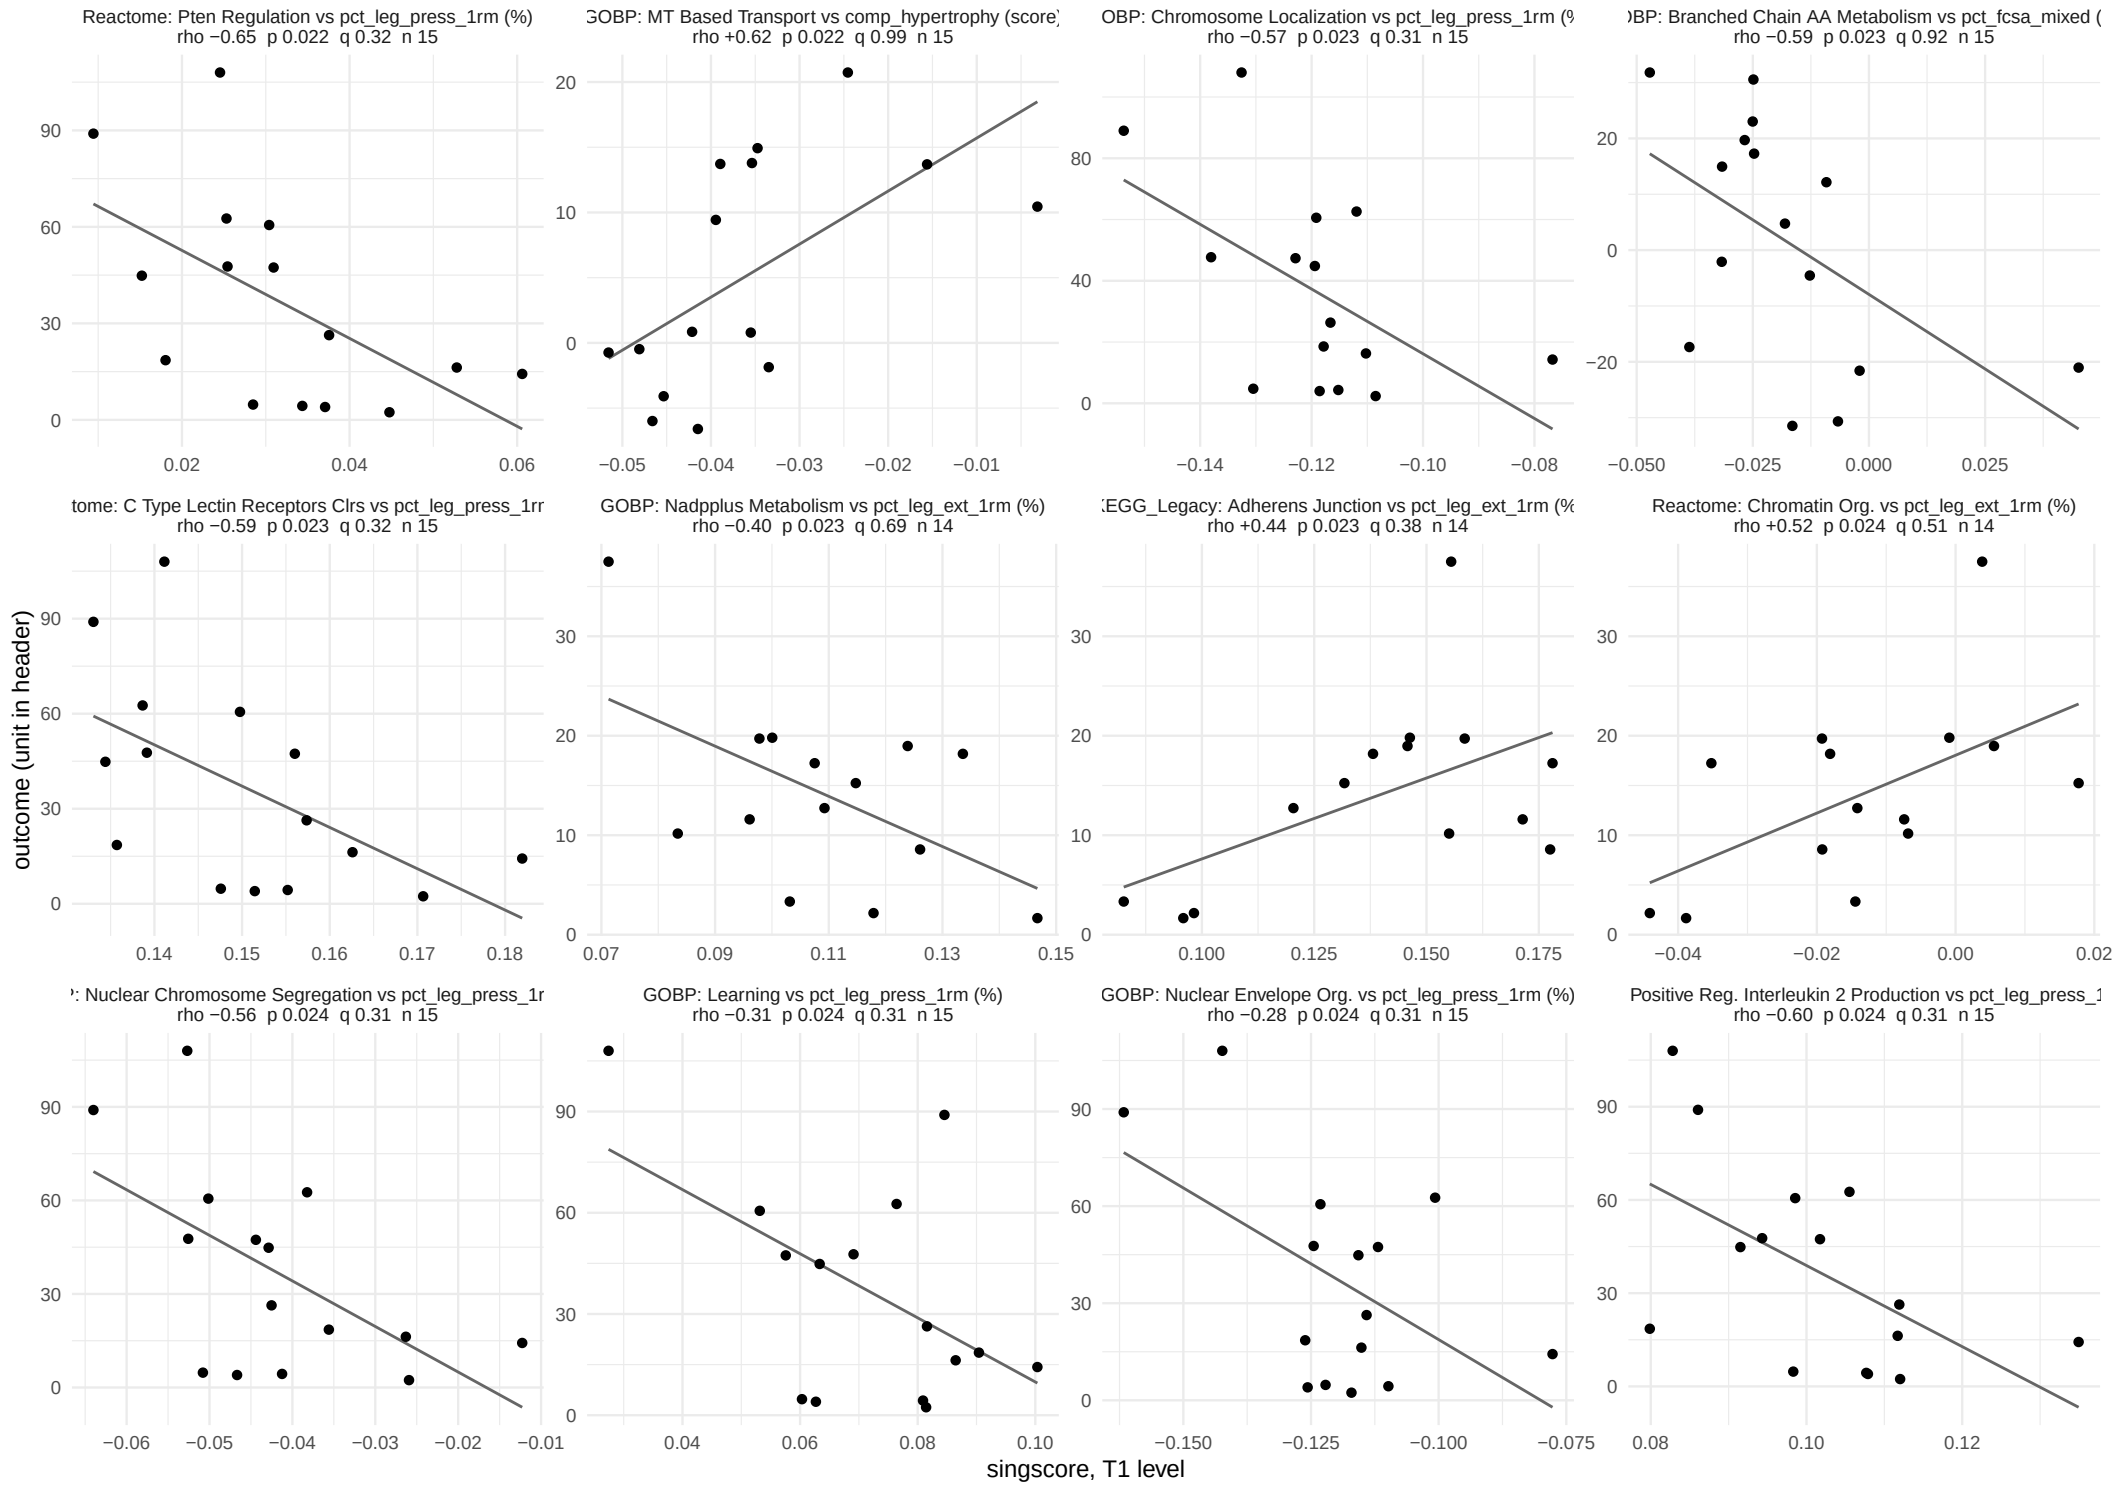

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, baseline window


439 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 17 of 37.

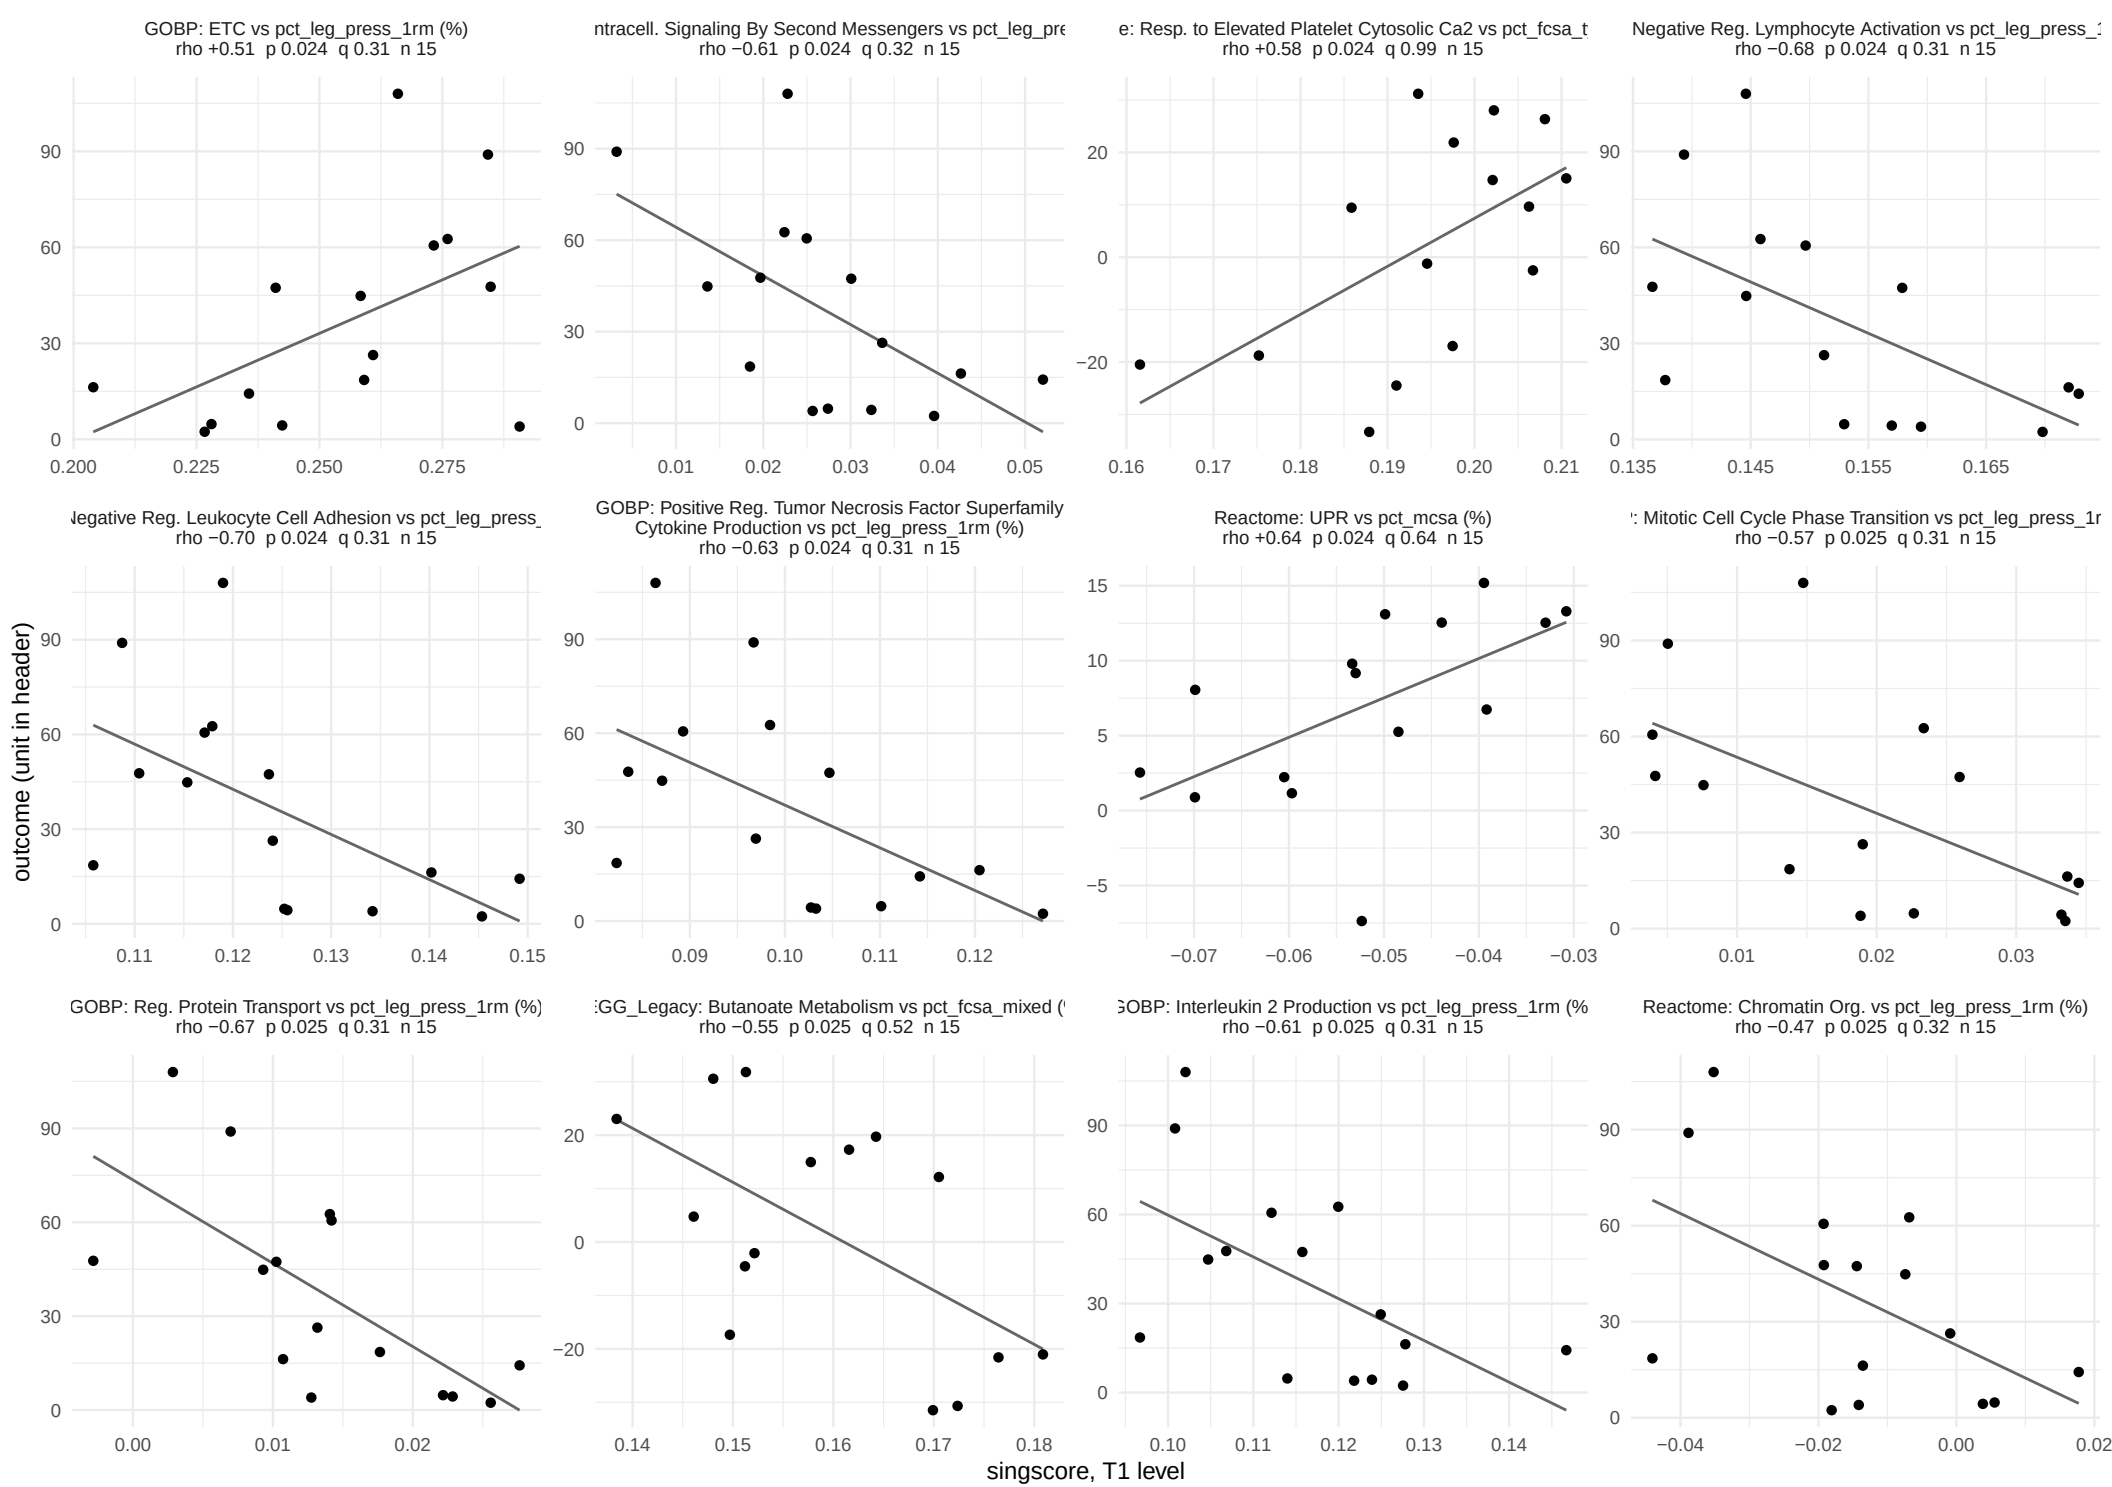

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, baseline window


439 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 18 of 37.

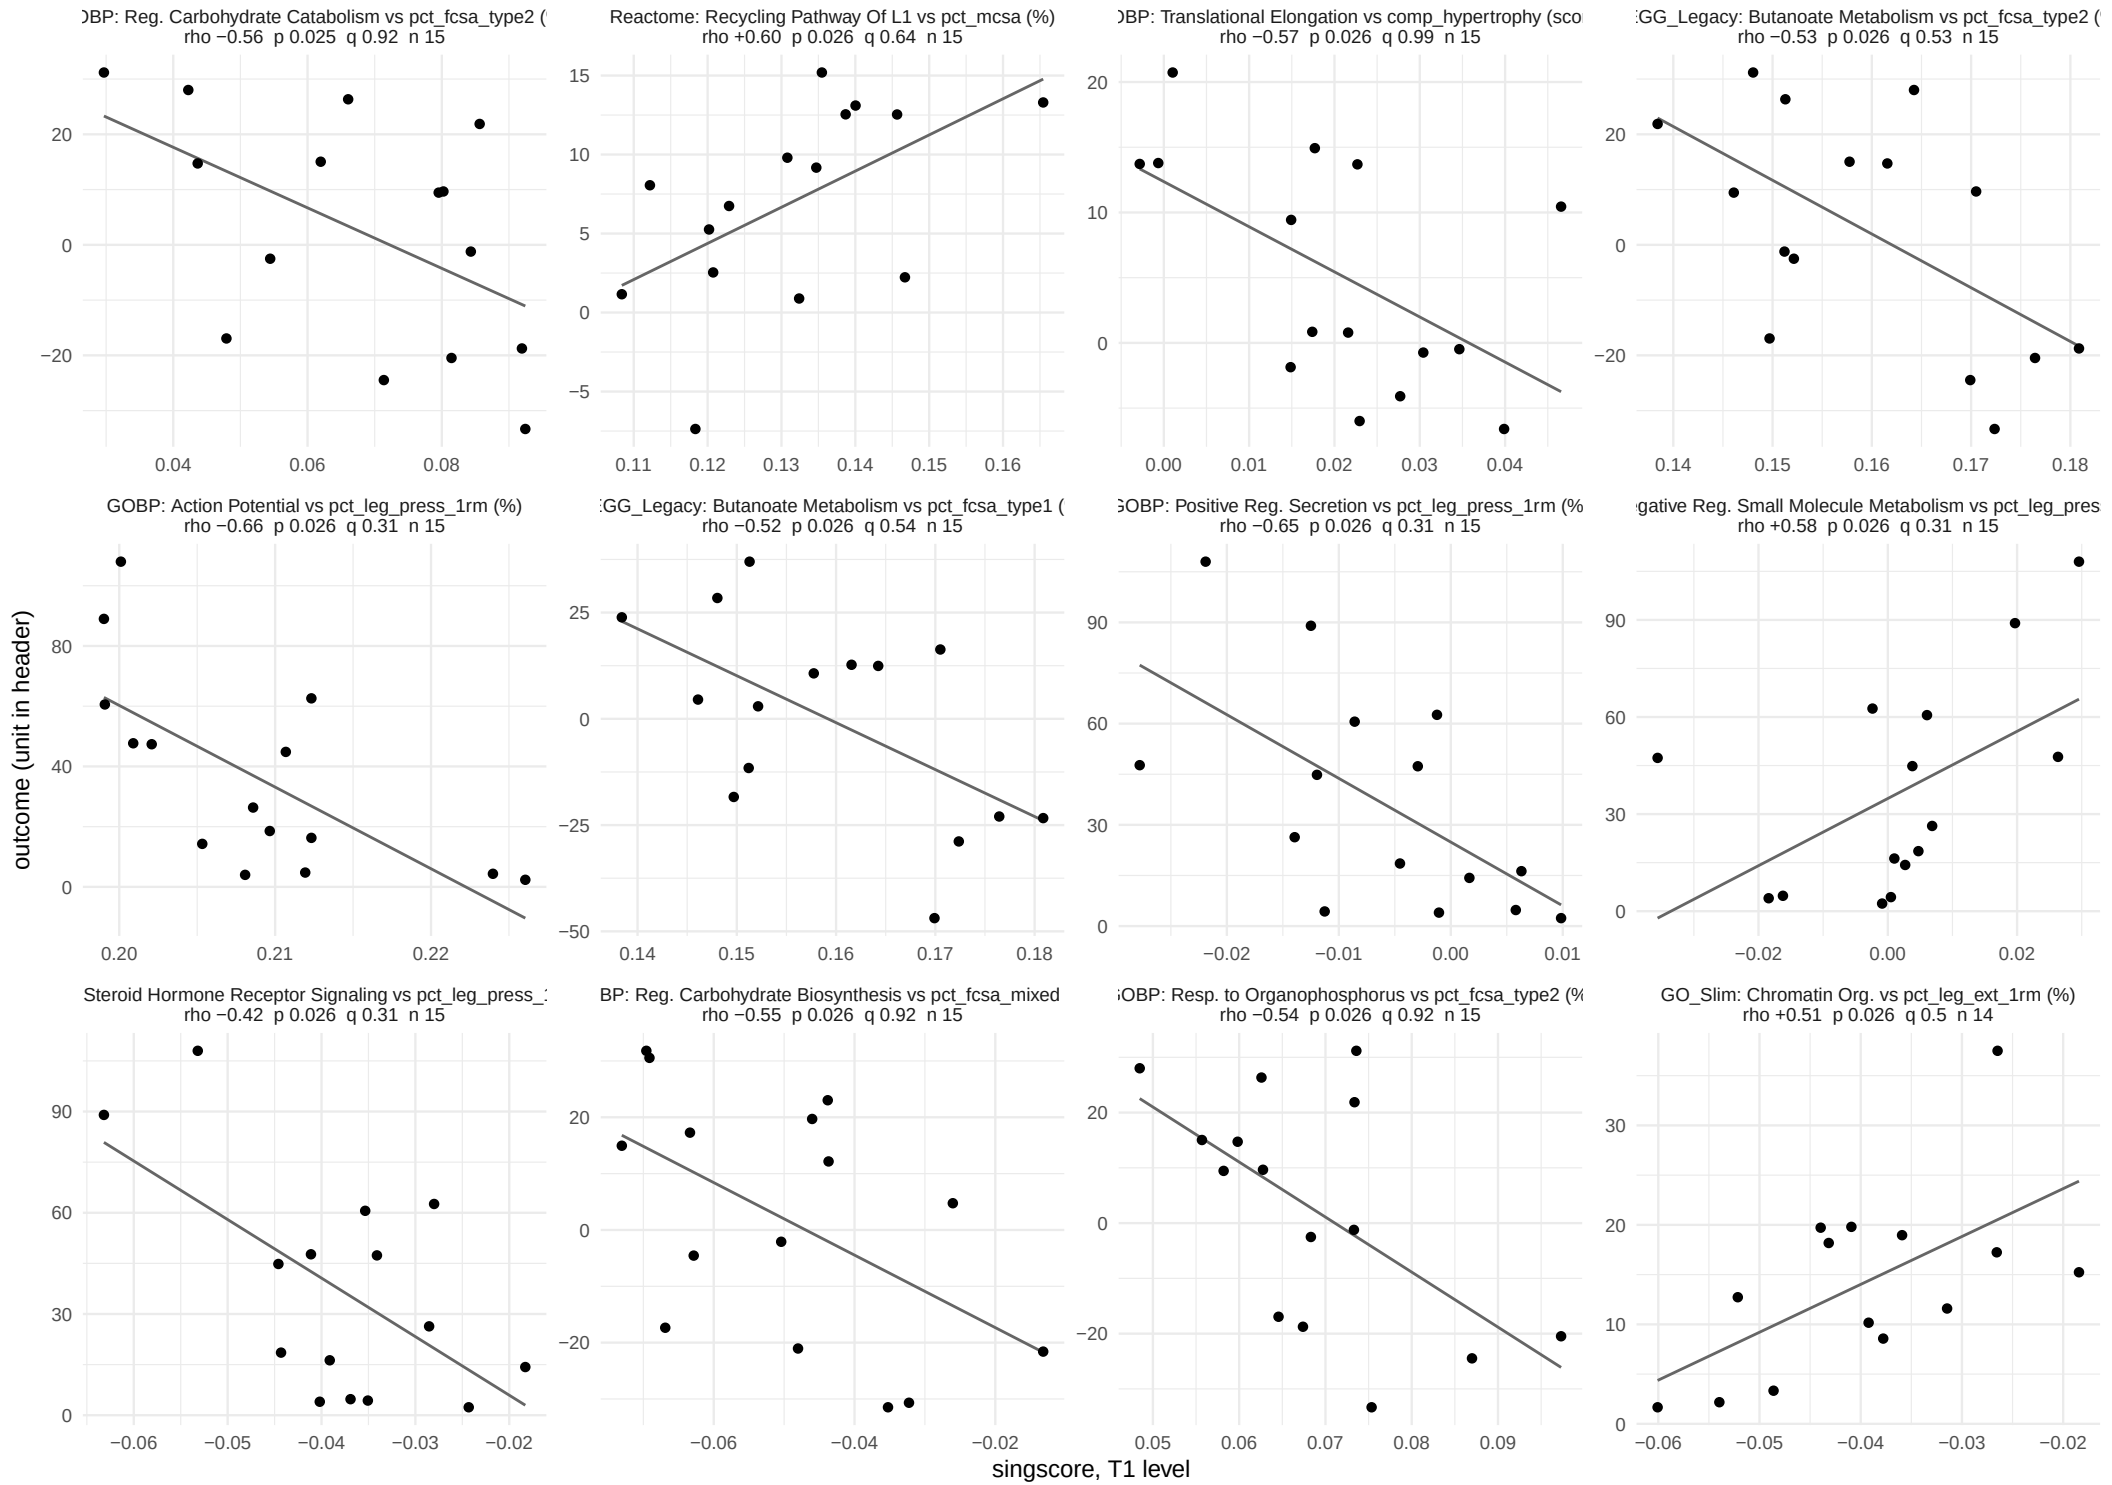

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, baseline window


439 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 19 of 37.

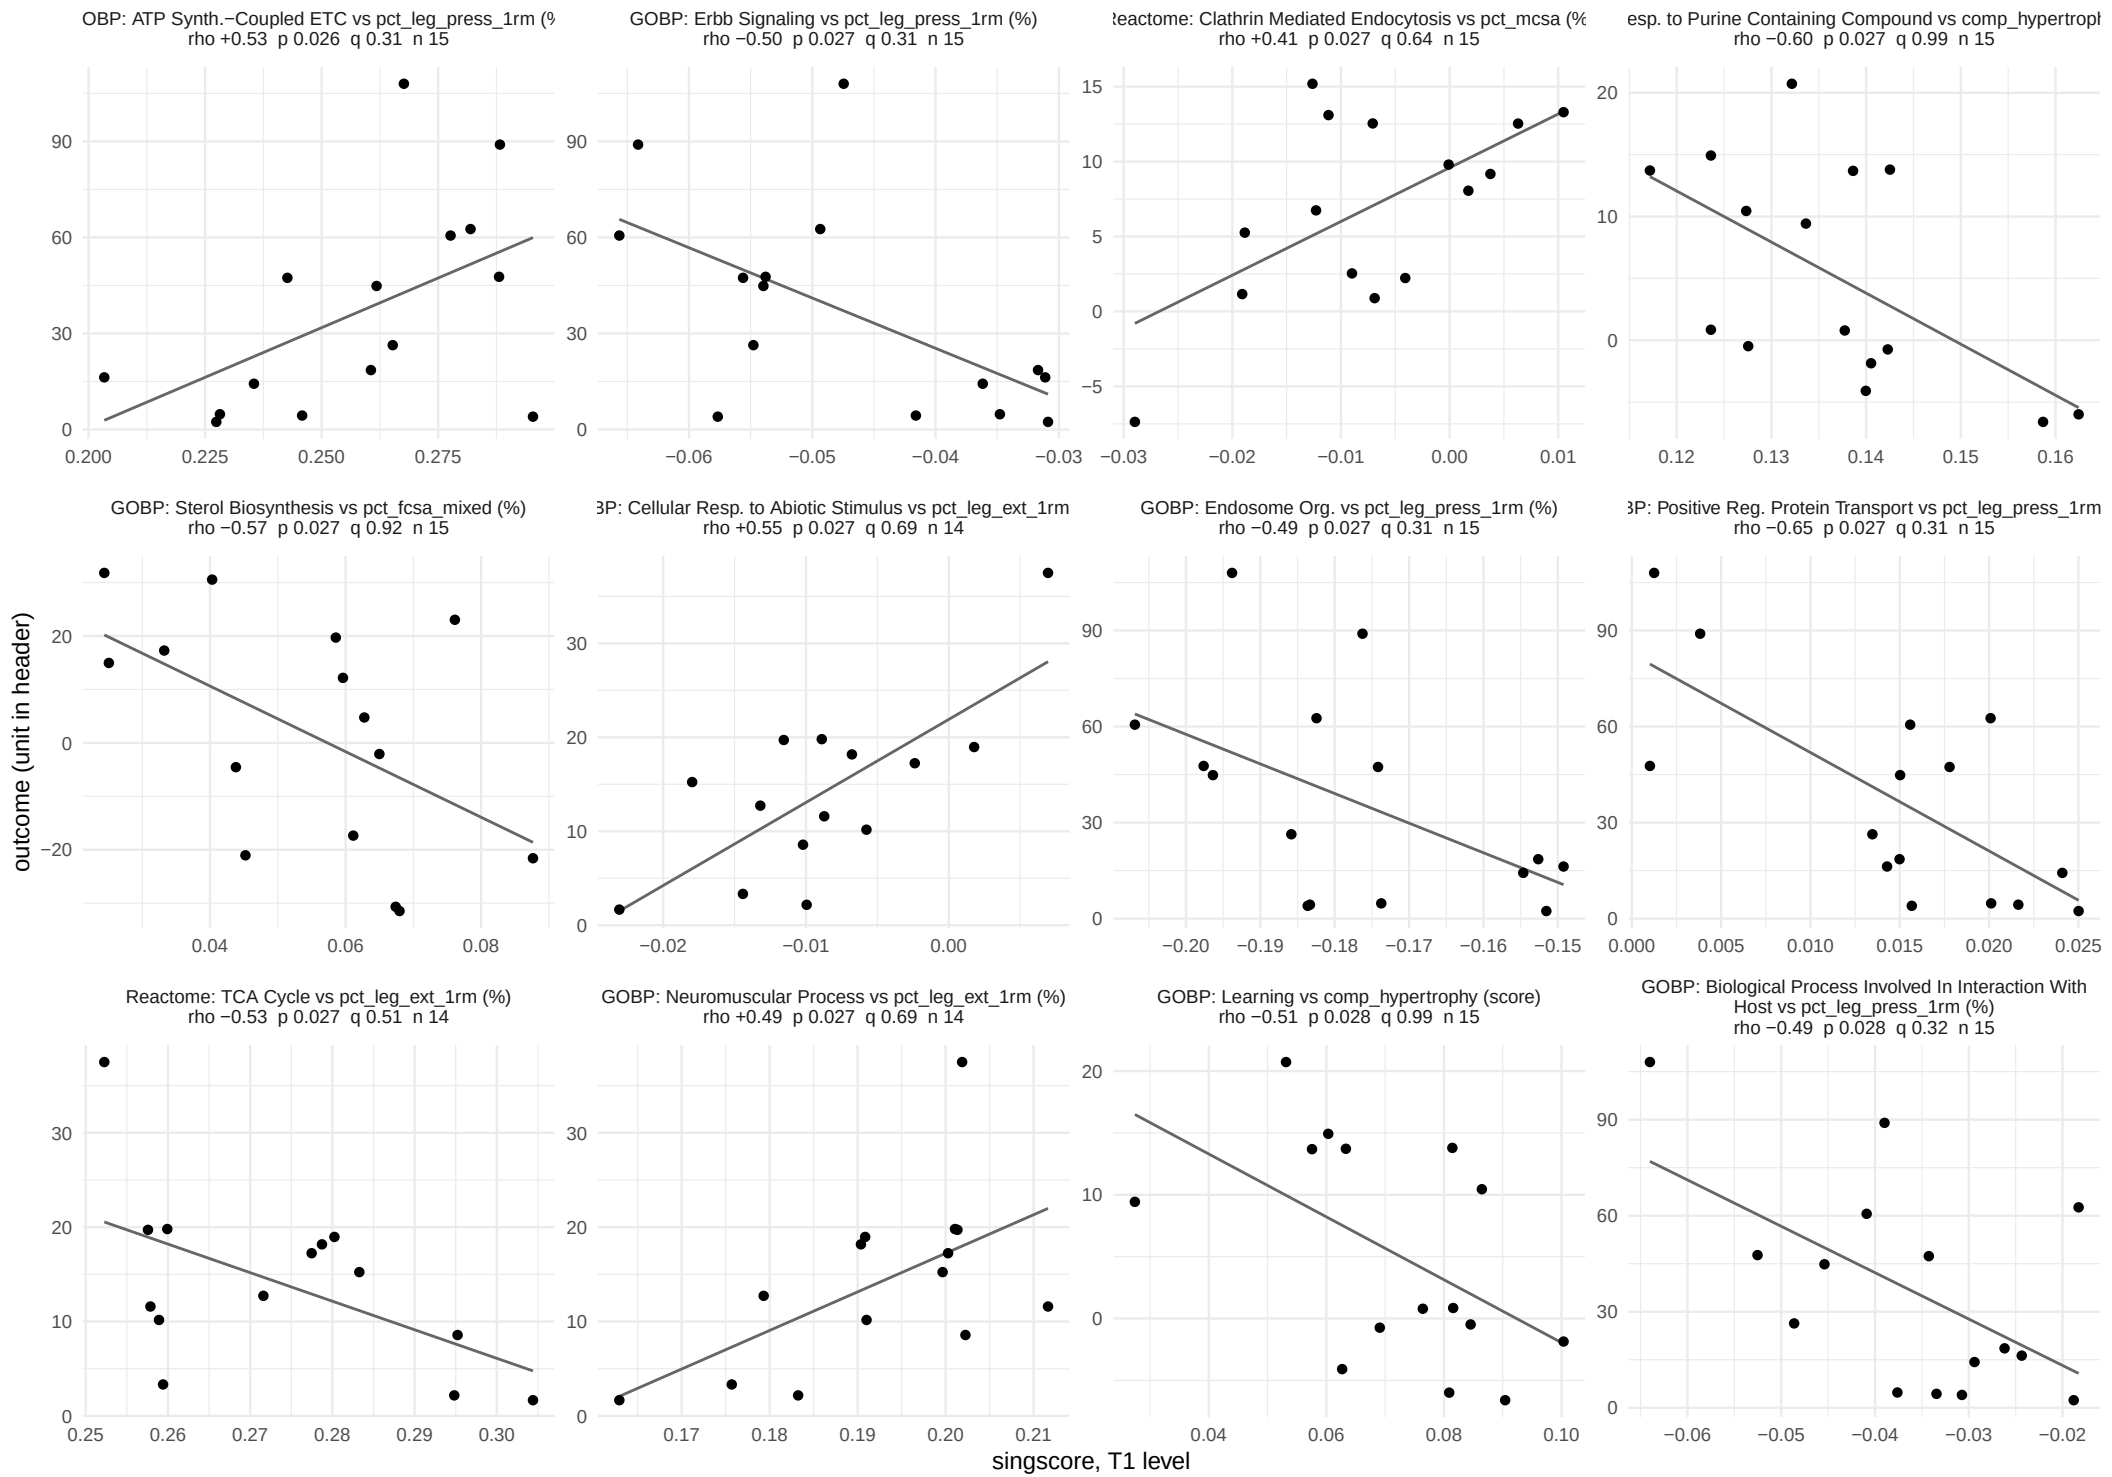

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, baseline window


439 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 20 of 37.

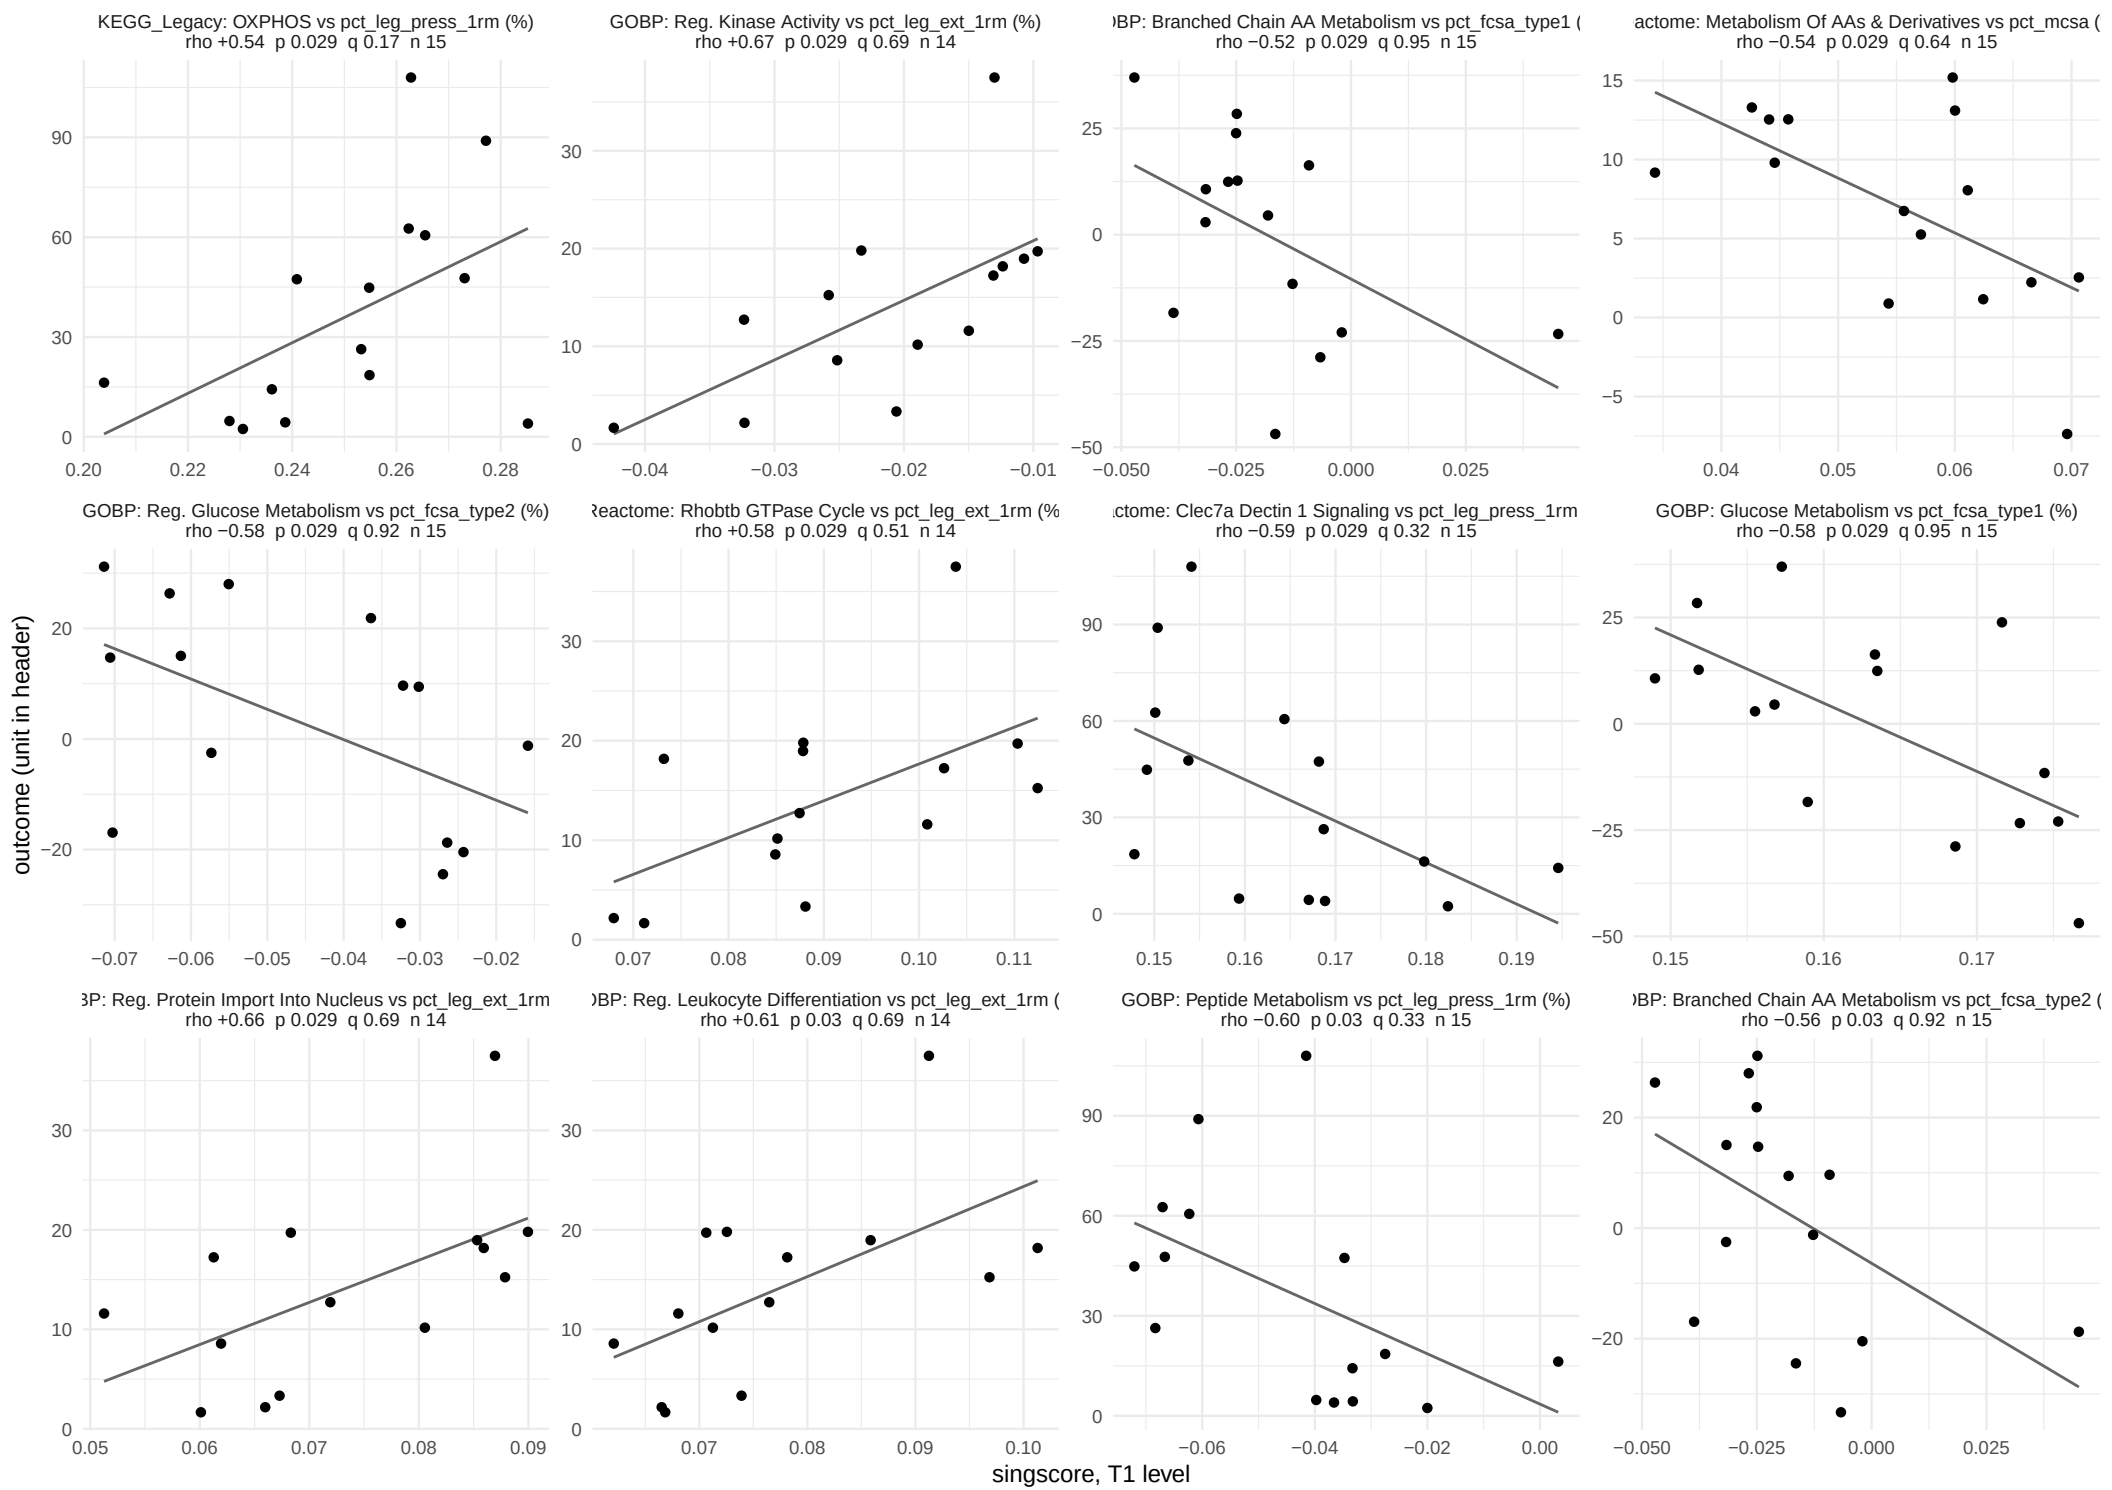

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, baseline window


439 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 21 of 37.

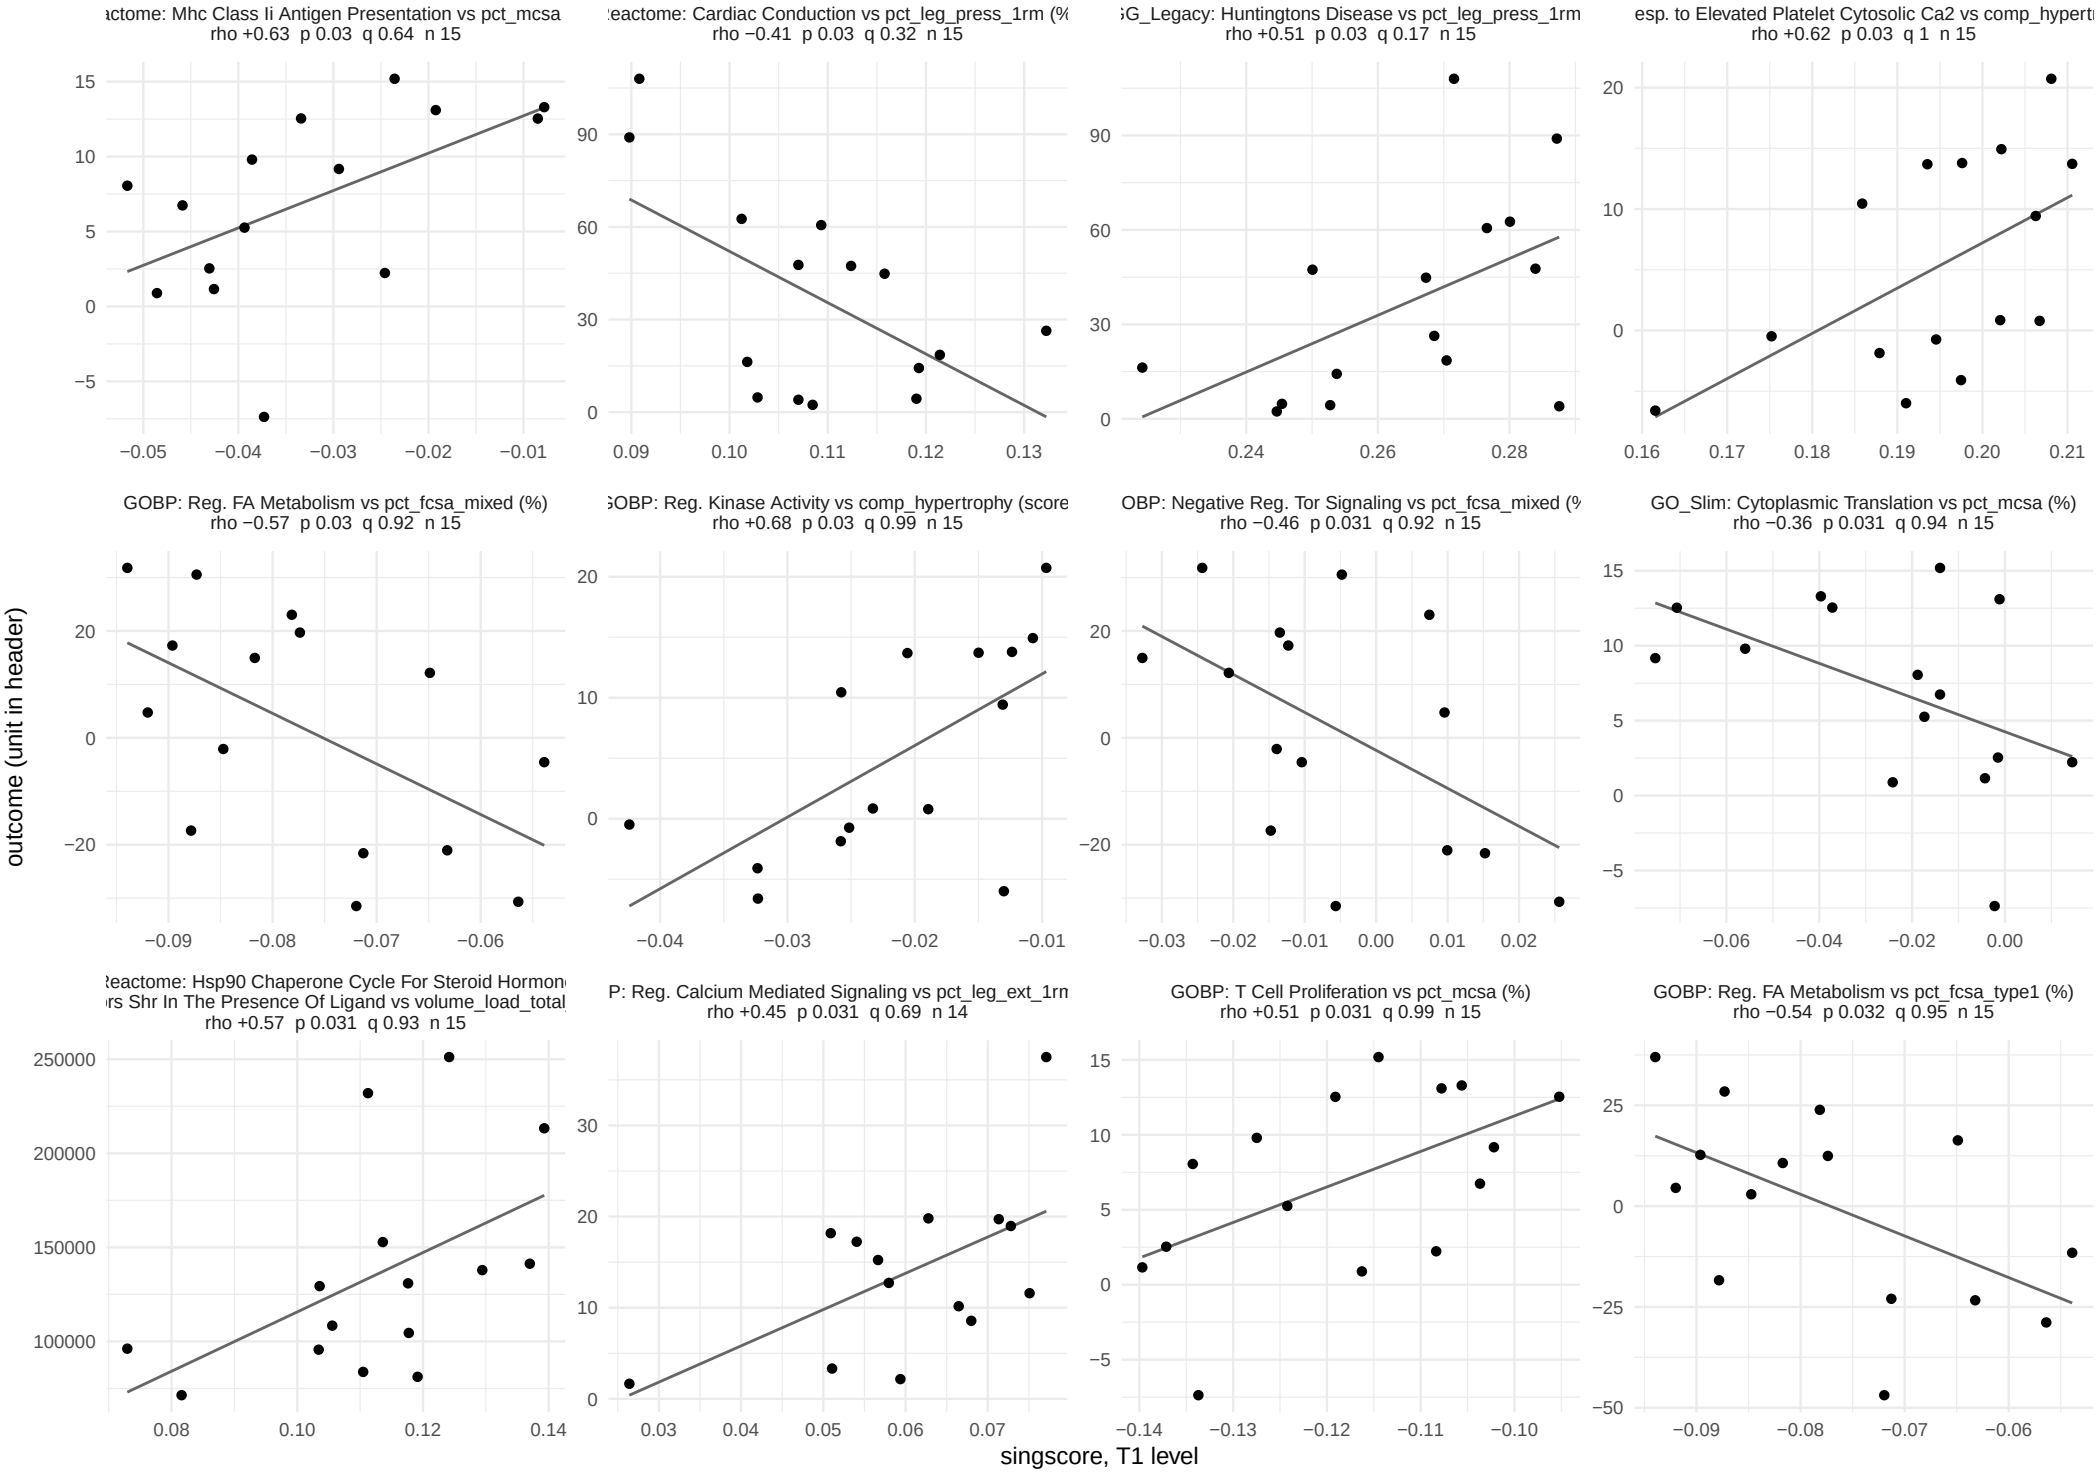

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, baseline window


439 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 22 of 37.

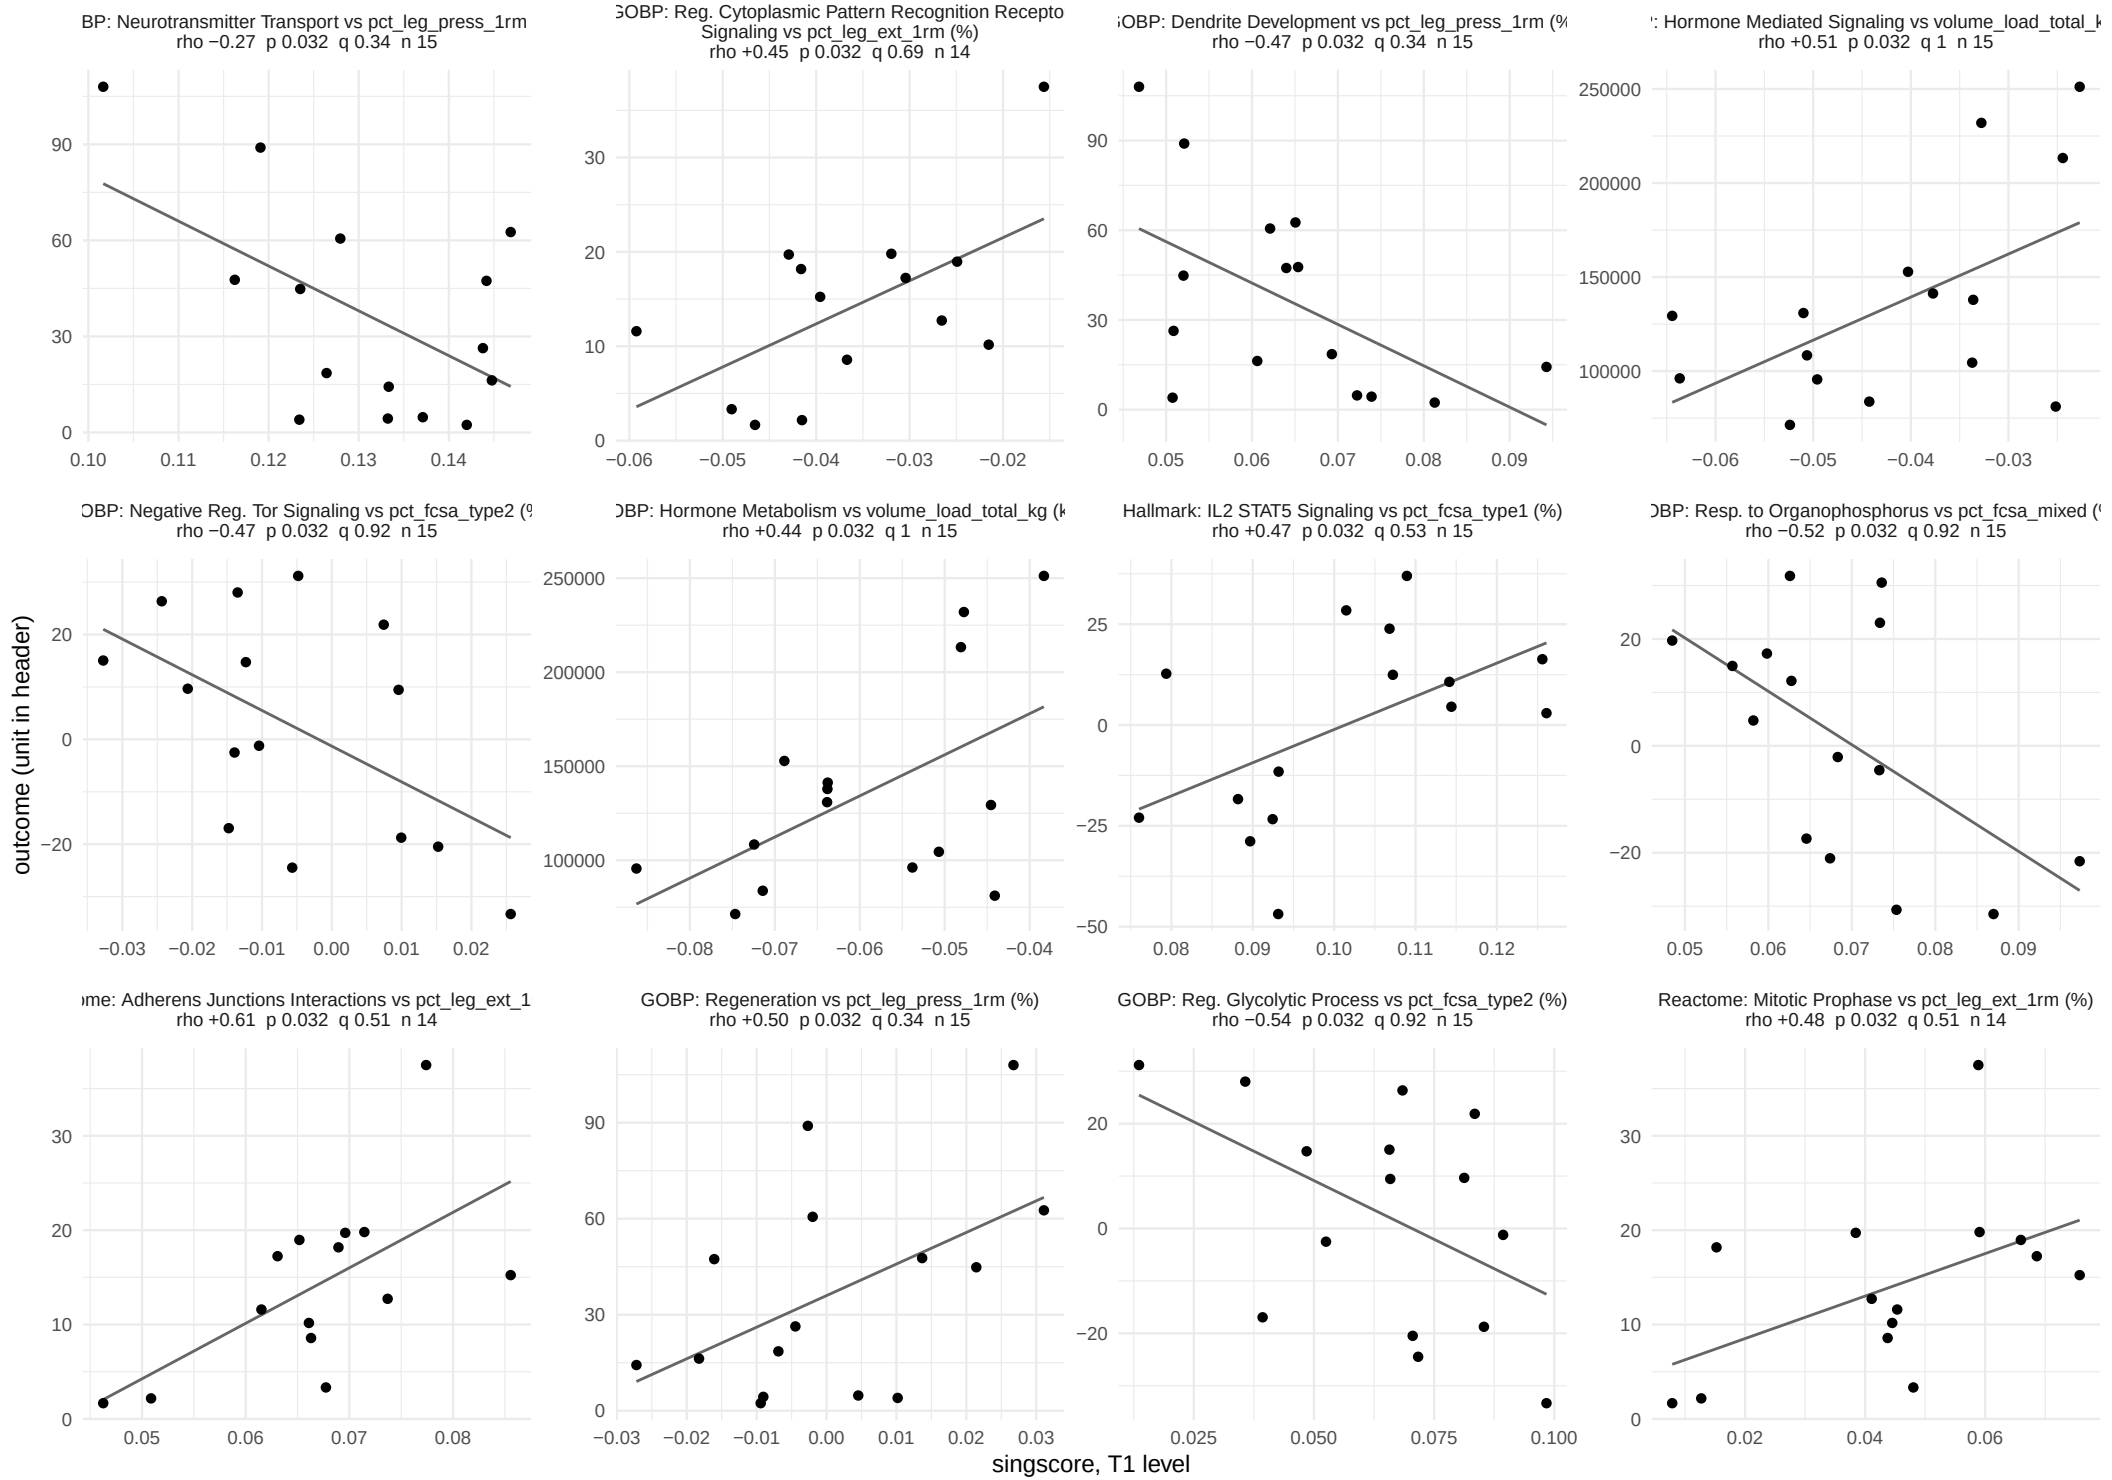

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, baseline window


439 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 23 of 37.

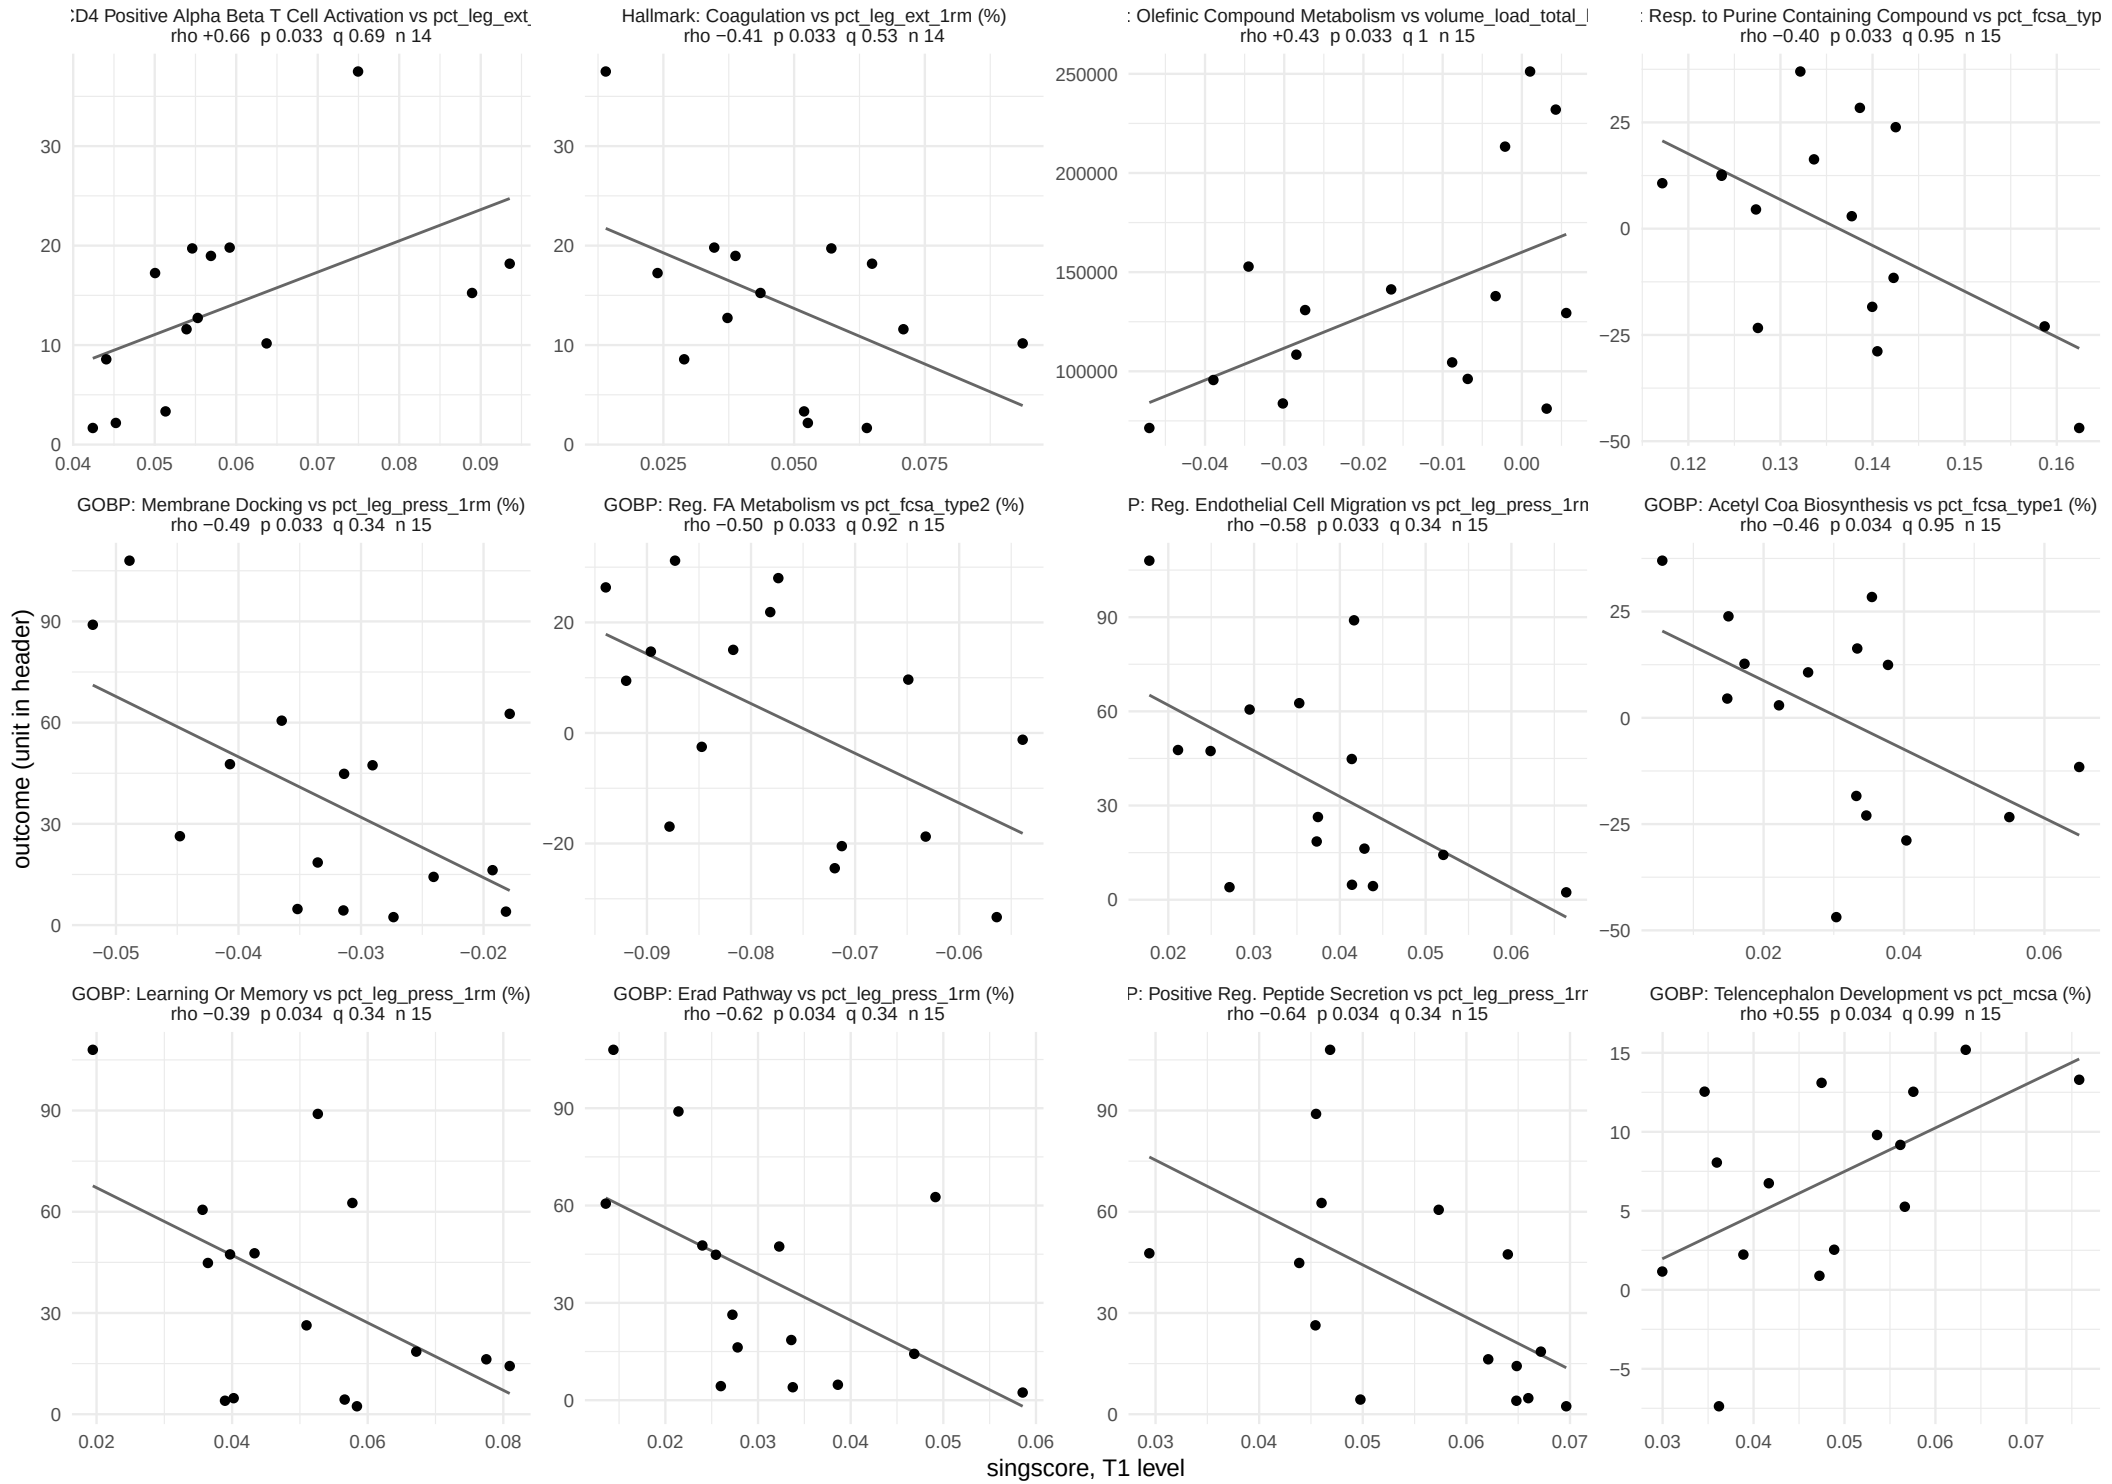

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, baseline window


439 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 24 of 37.

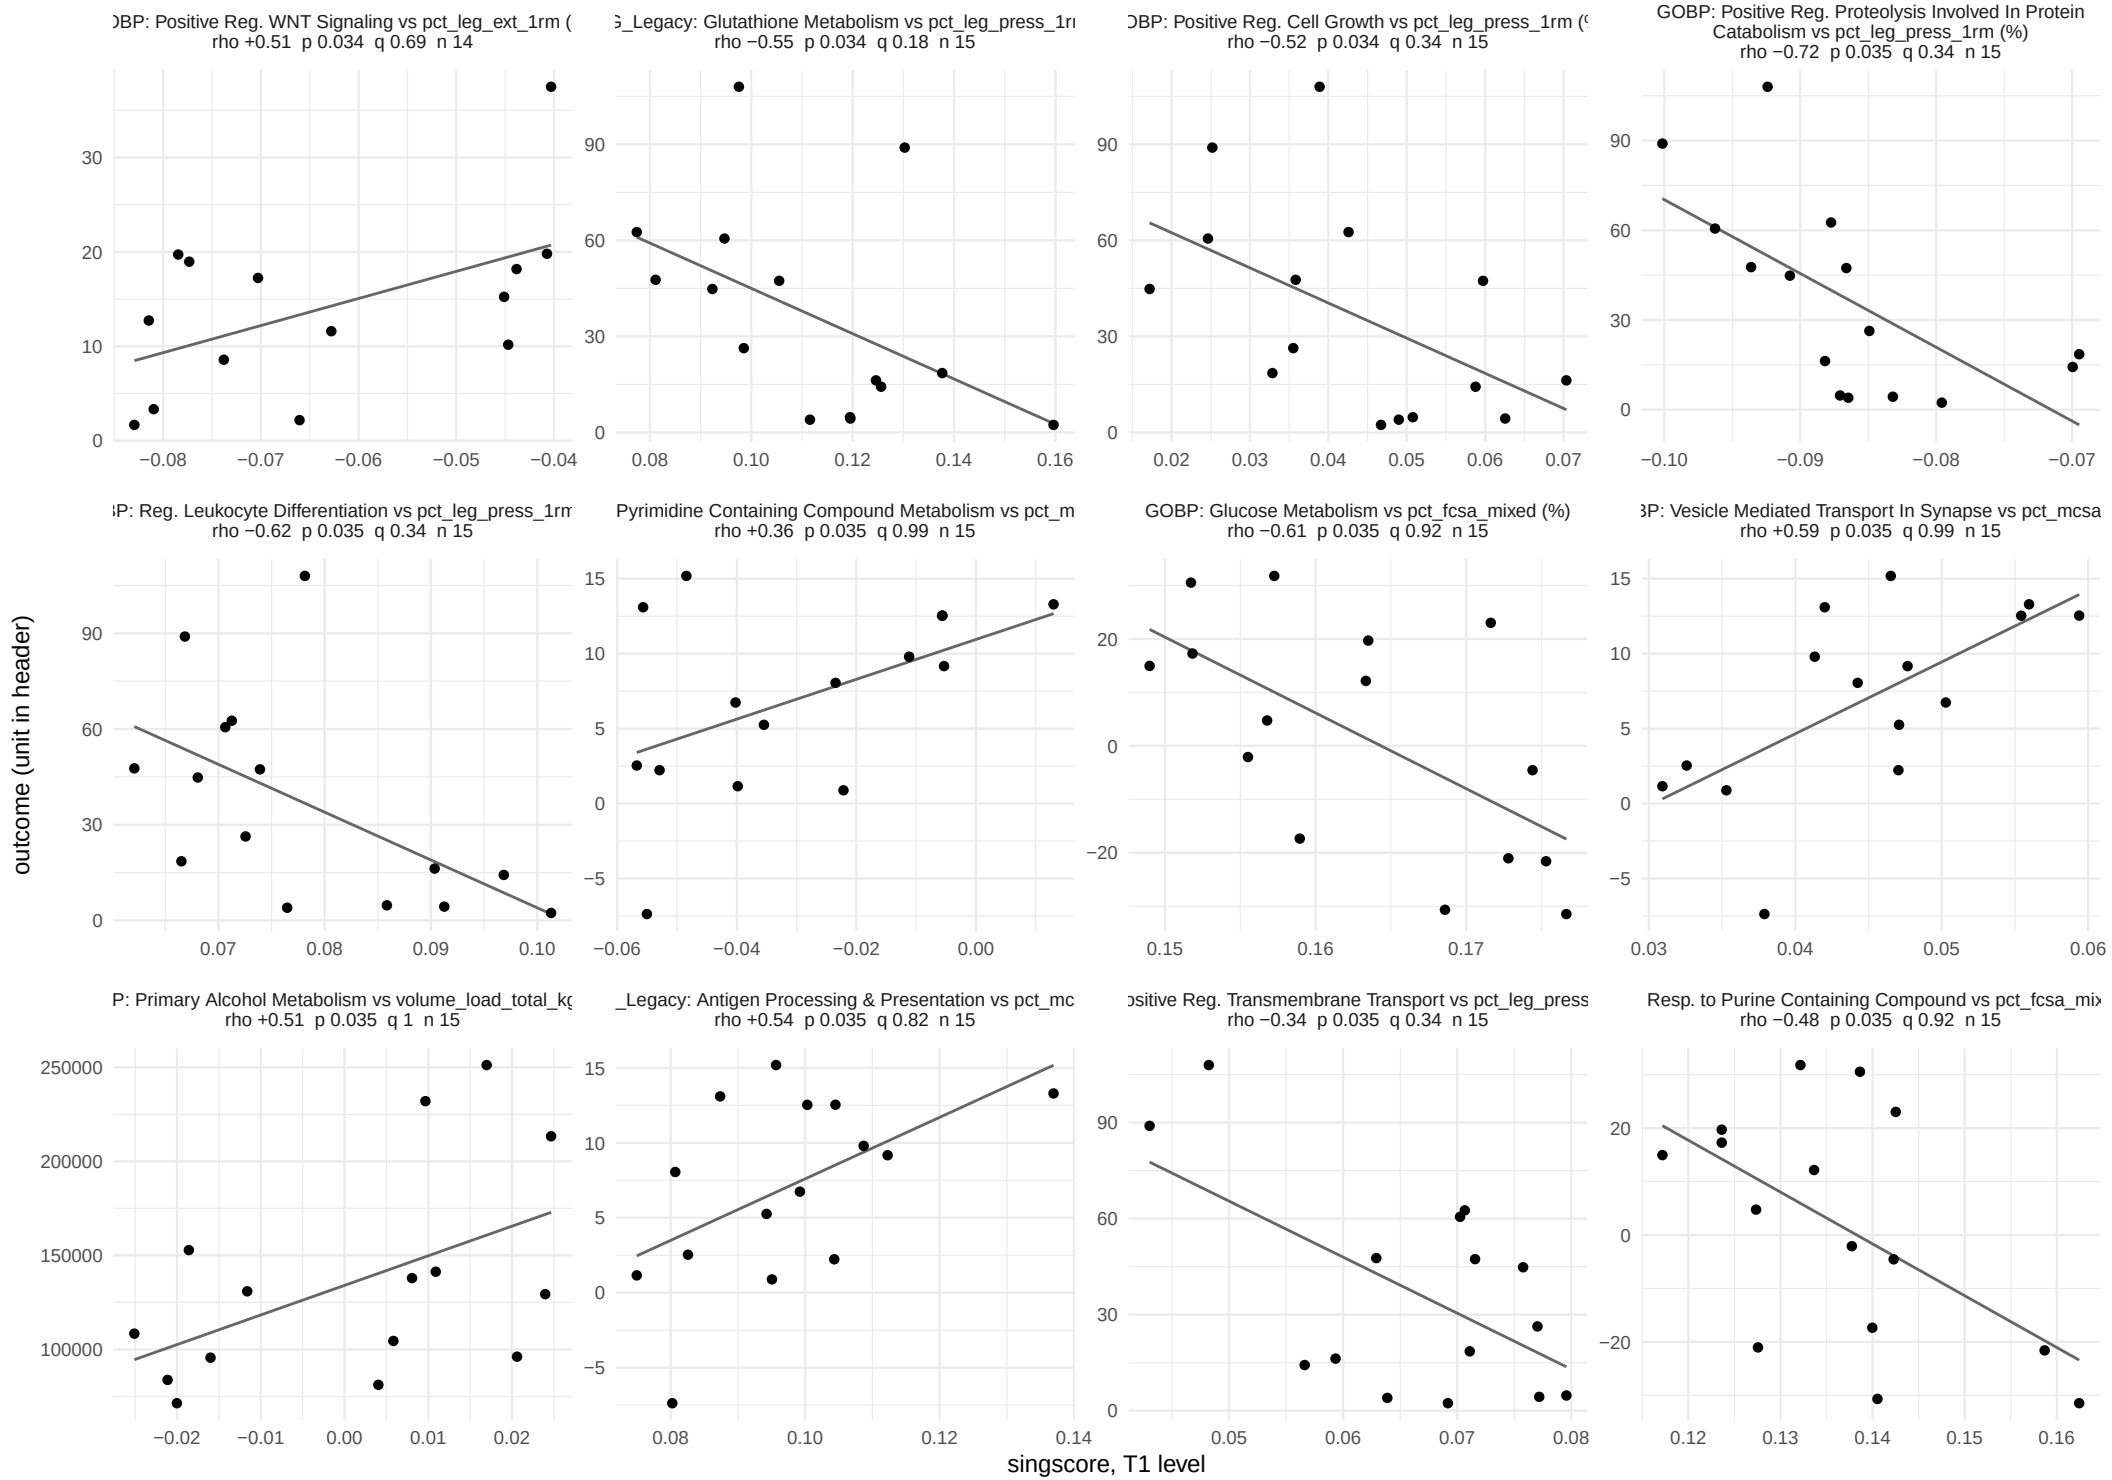

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, baseline window


439 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 25 of 37.

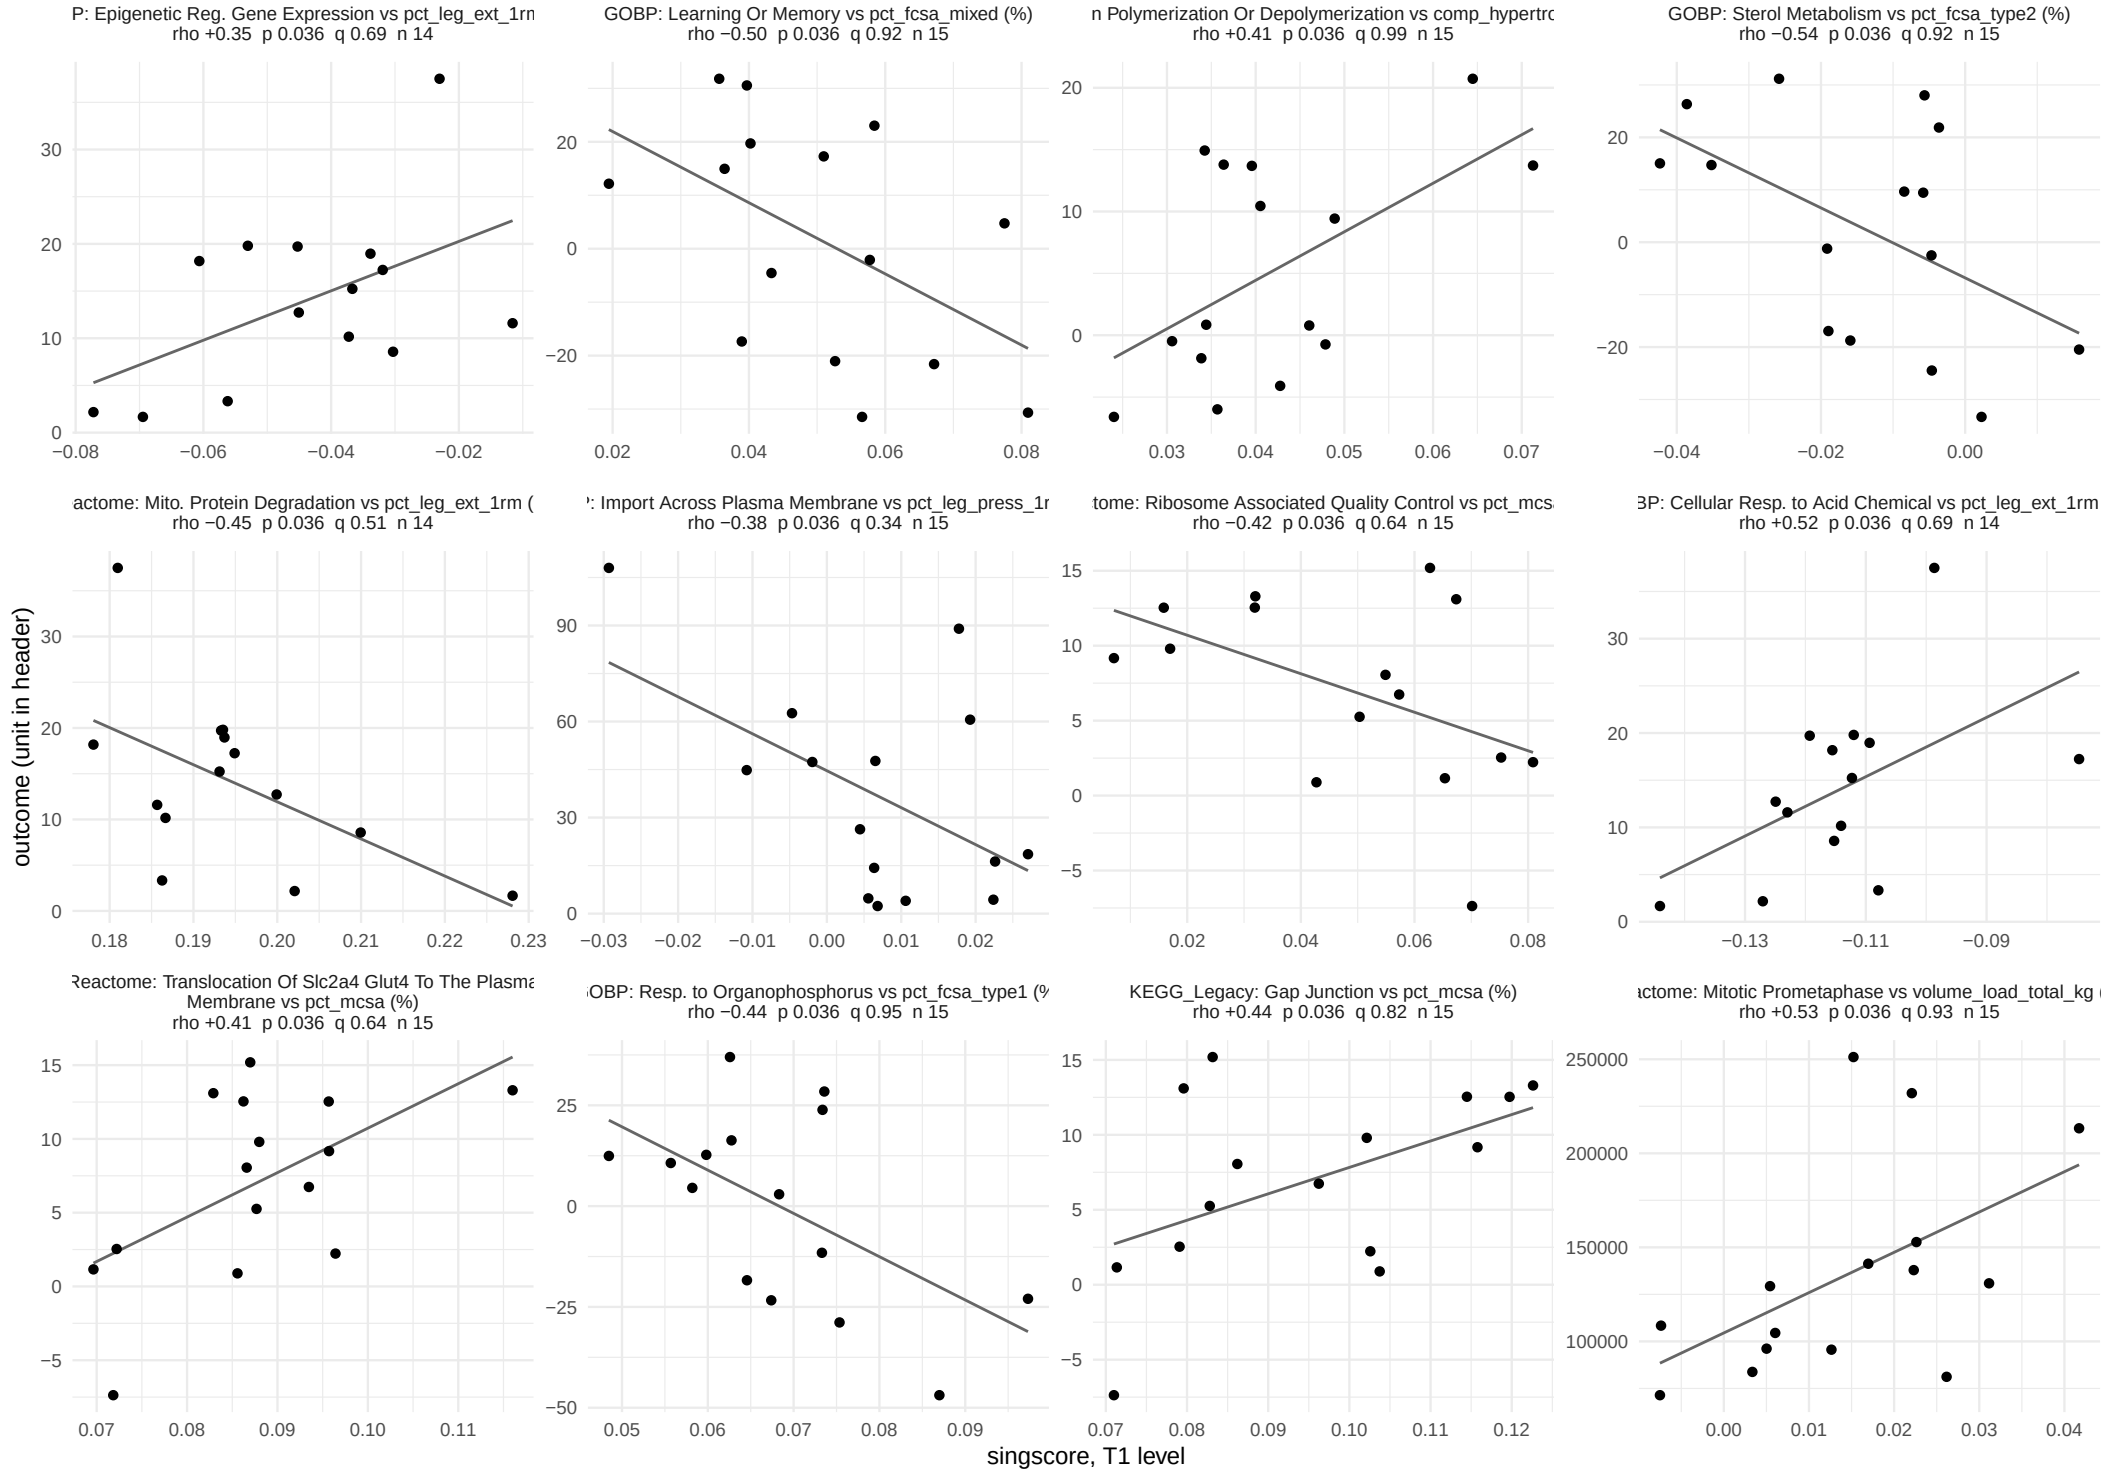

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, baseline window


439 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 26 of 37.

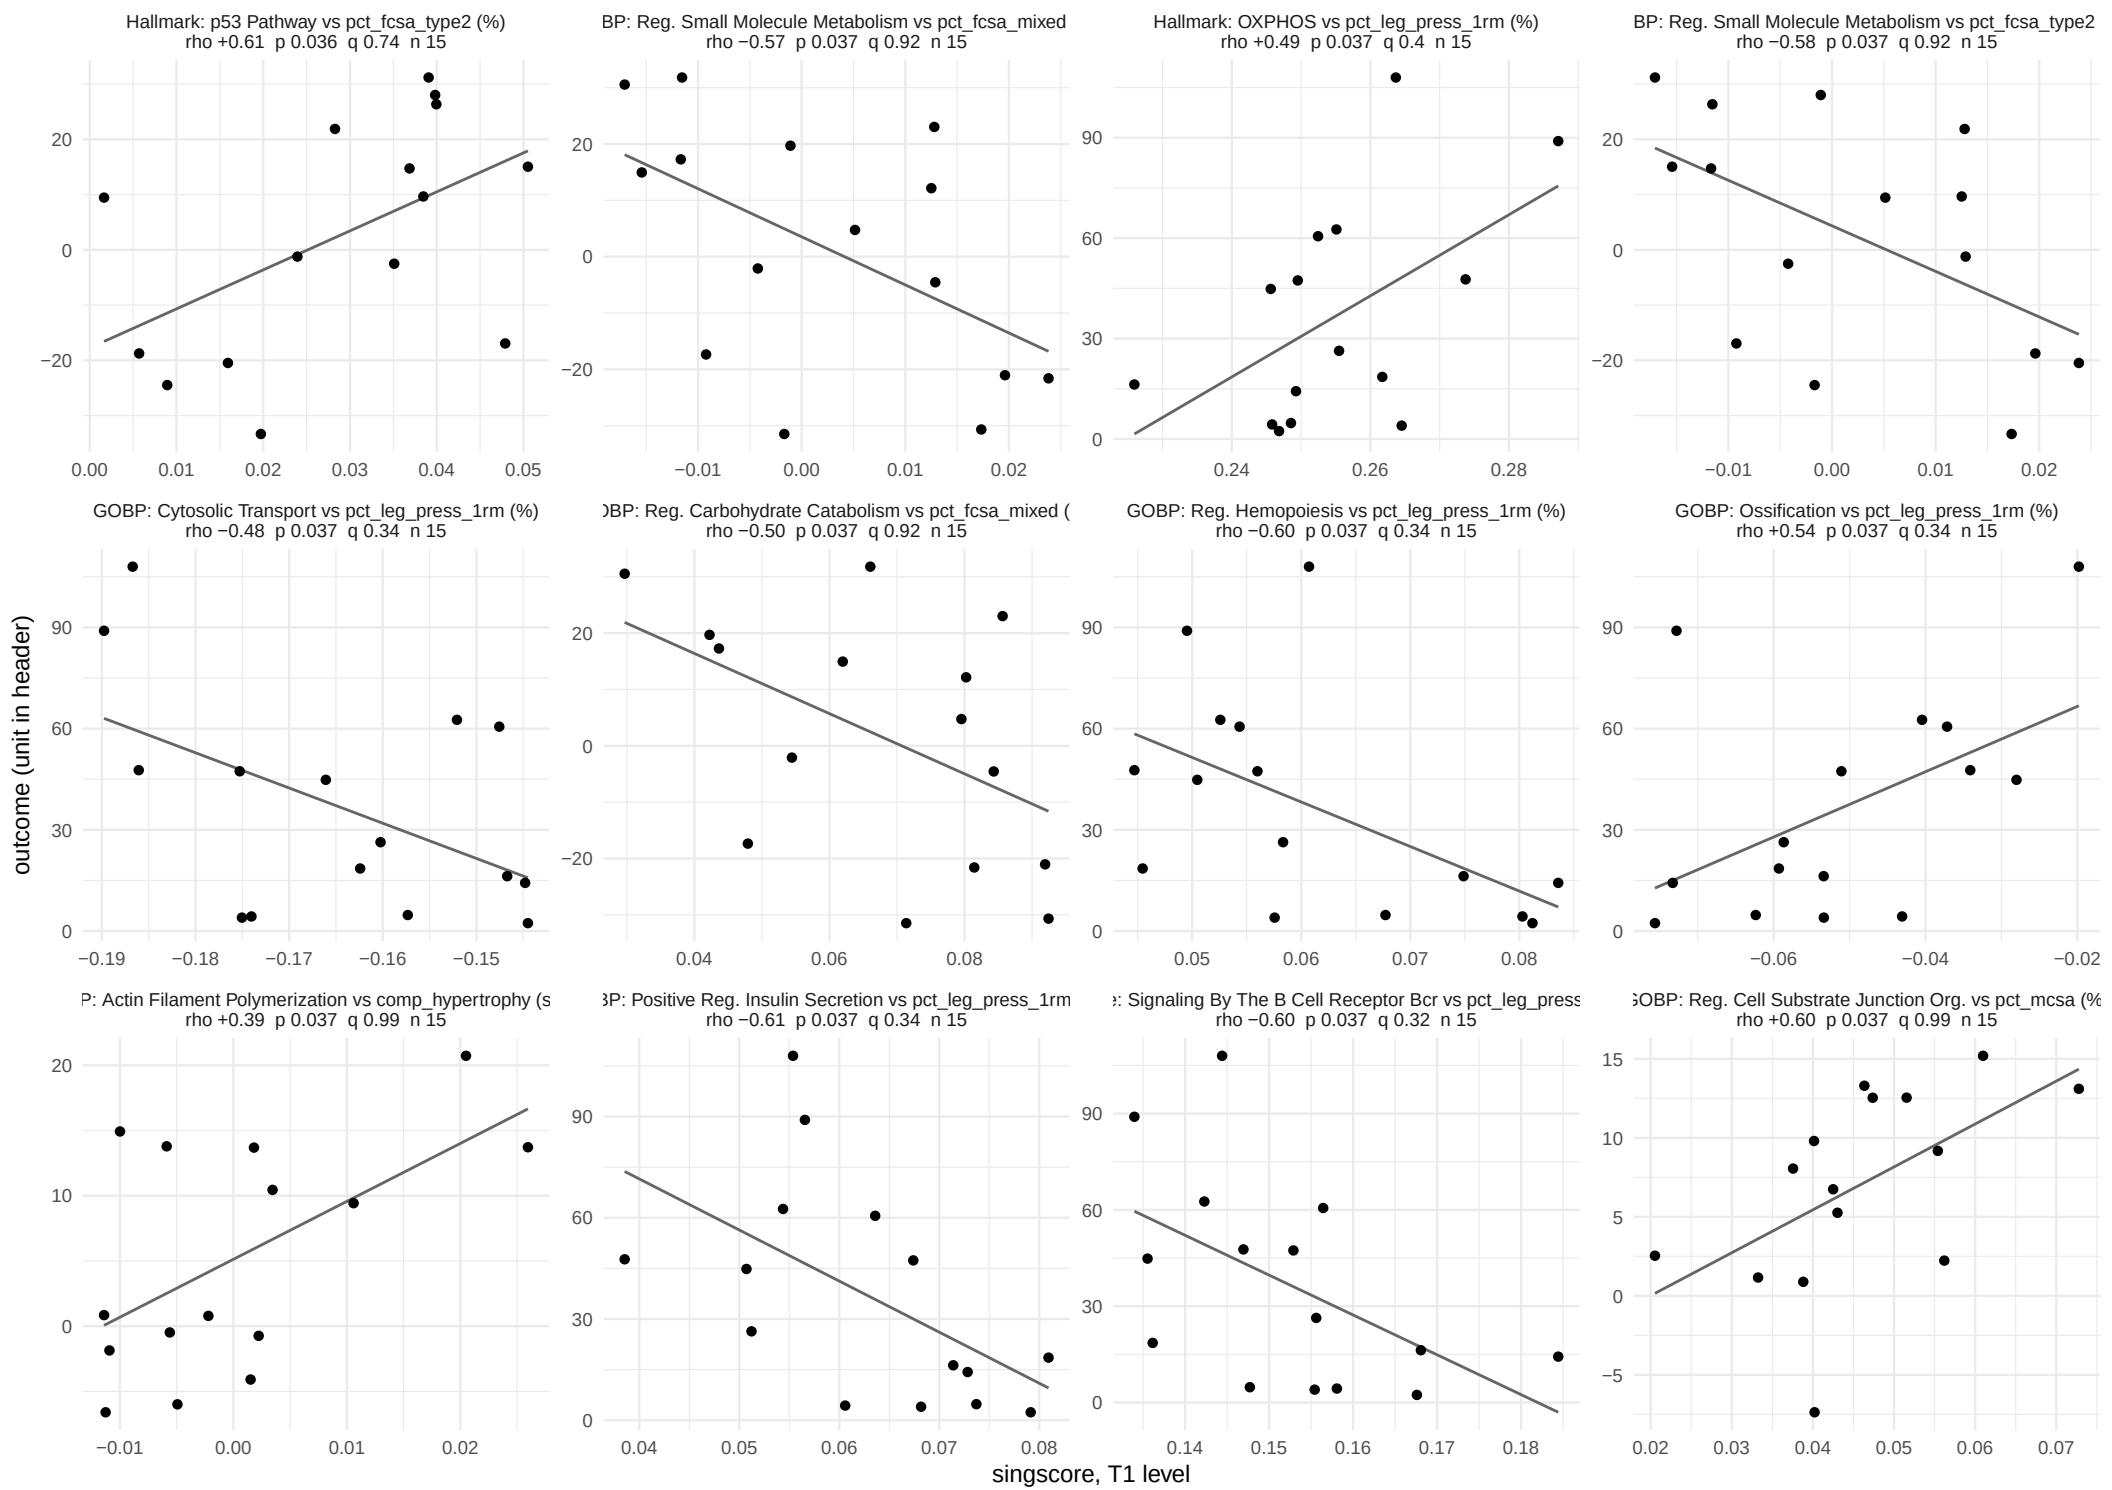

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, baseline window


439 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 27 of 37.

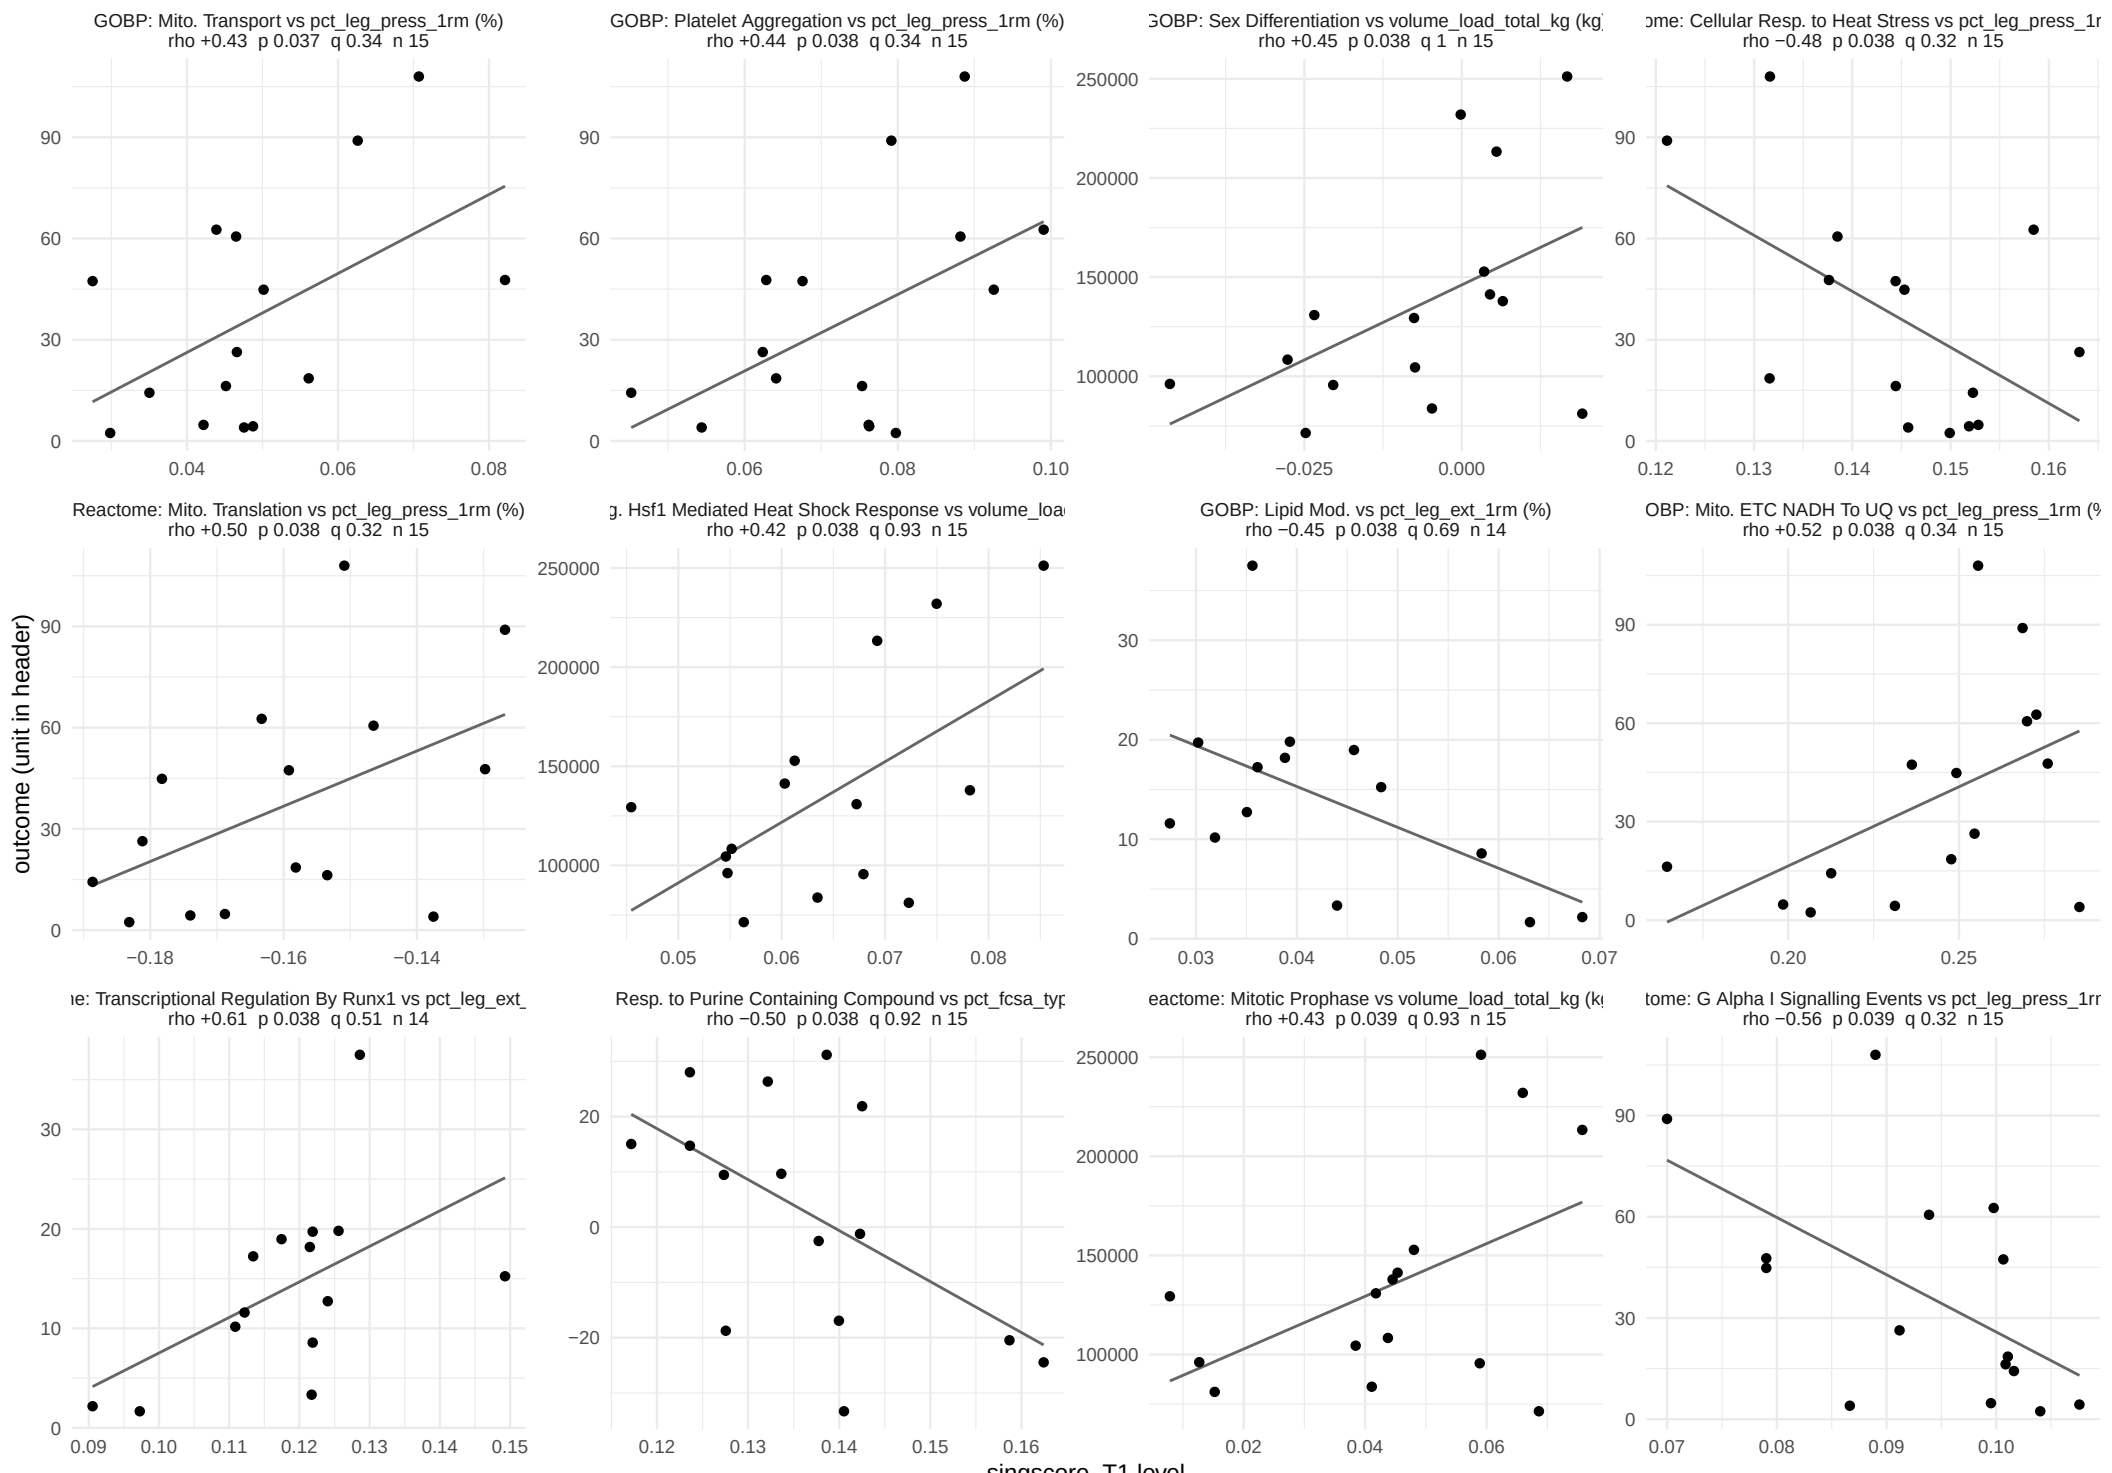

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, baseline window


439 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 28 of 37.

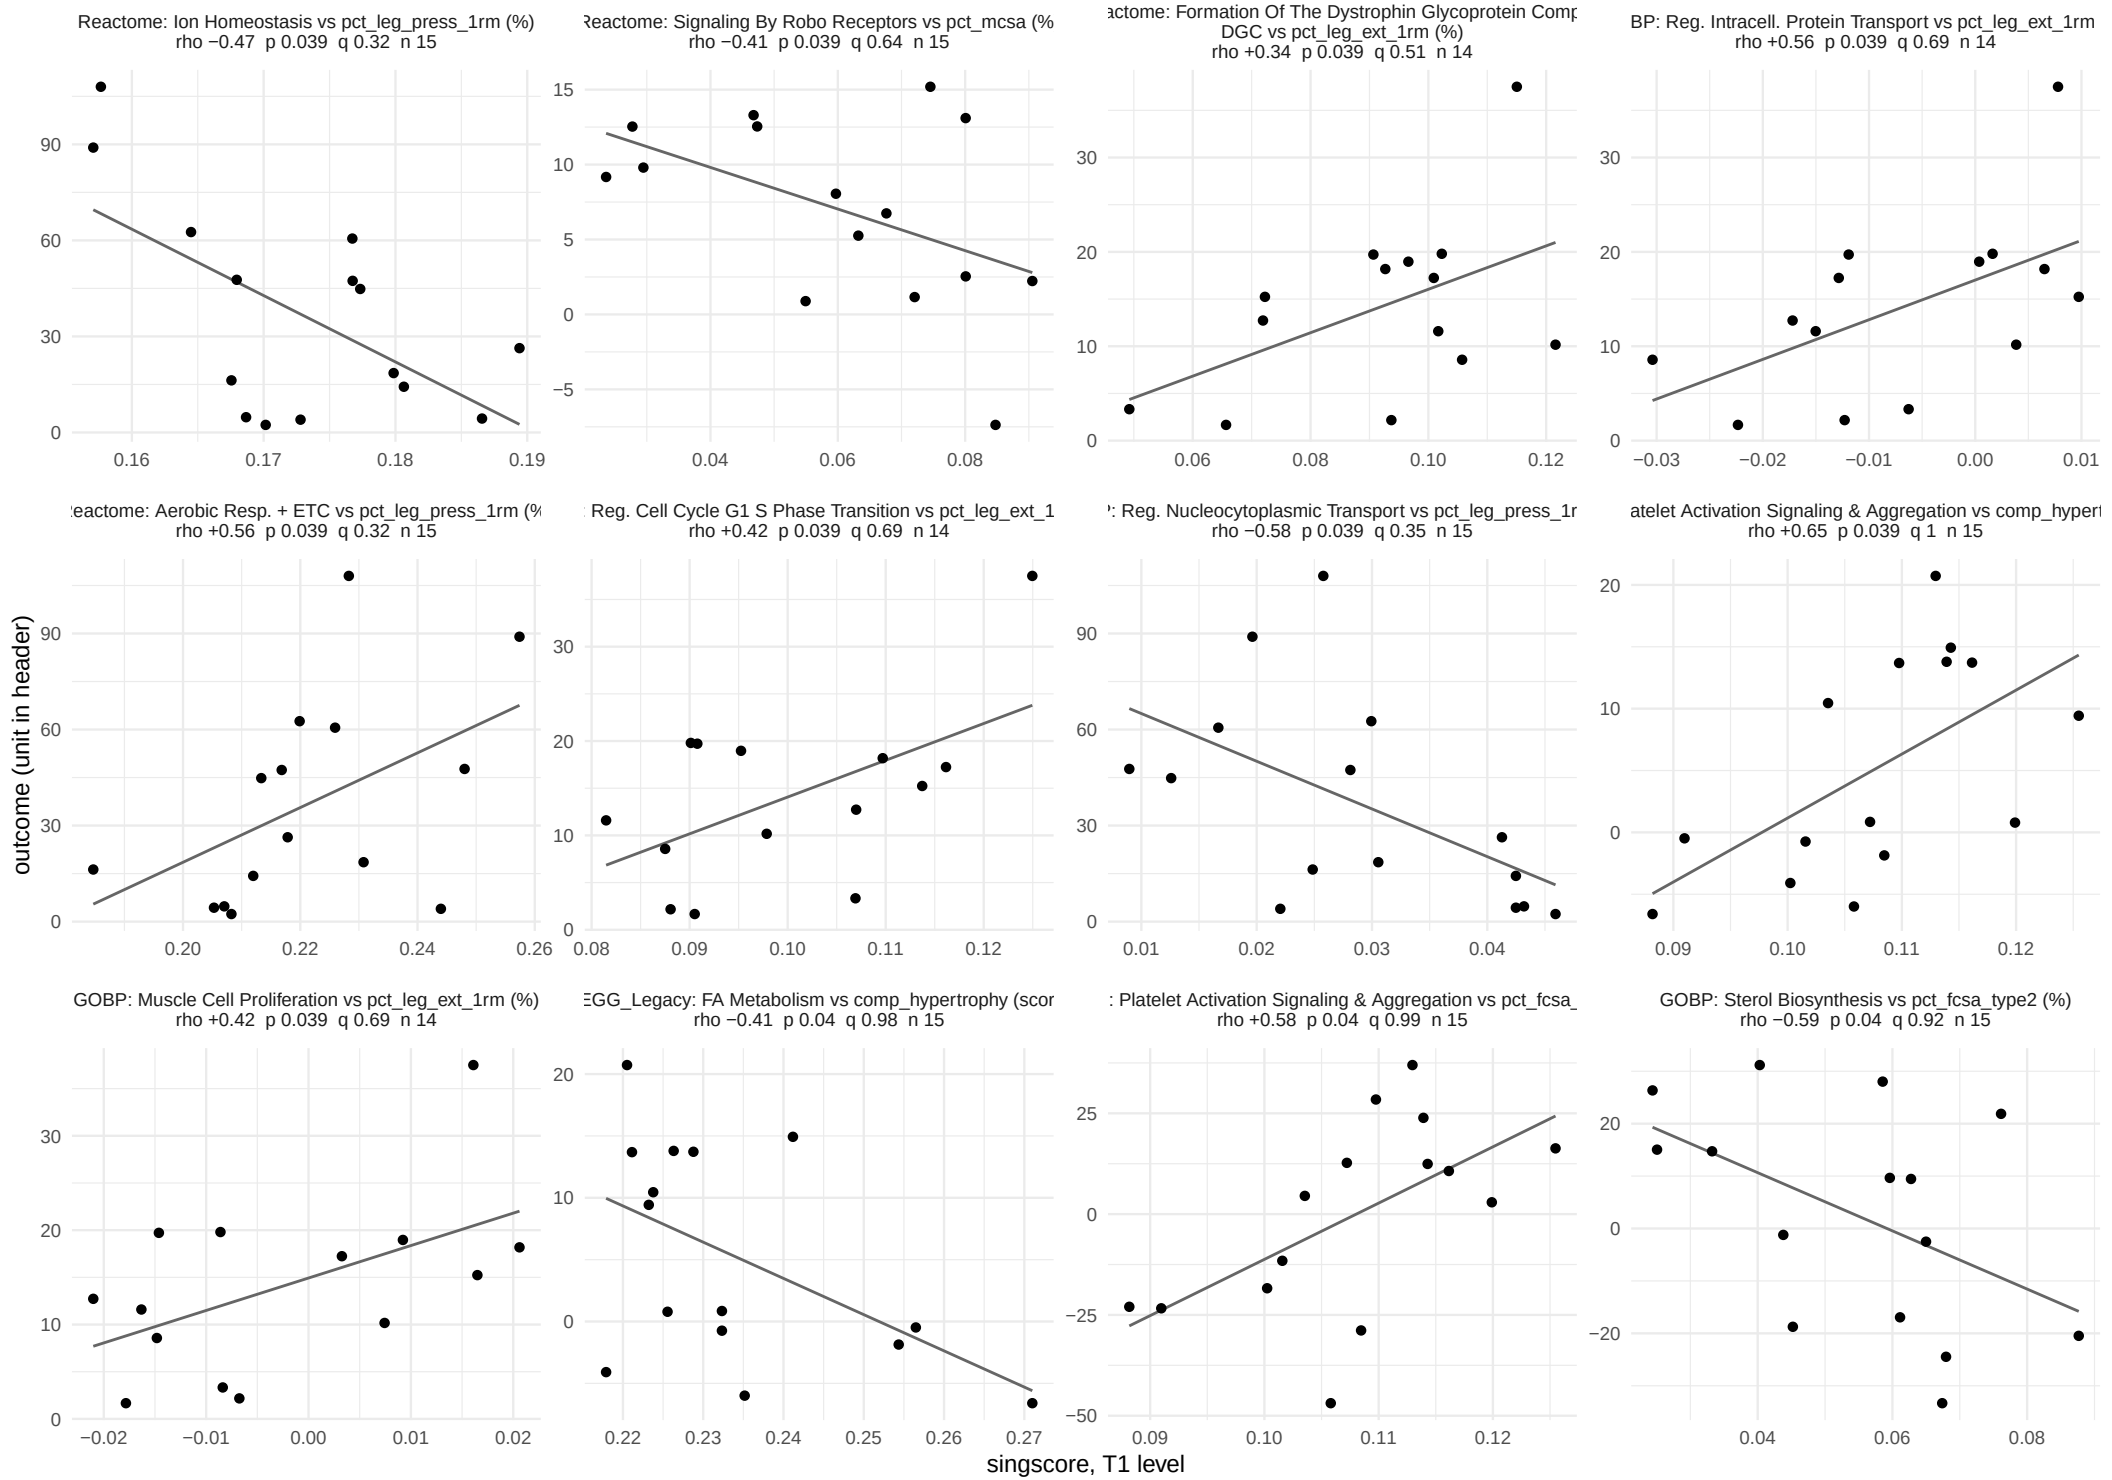

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, baseline window


439 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 29 of 37.

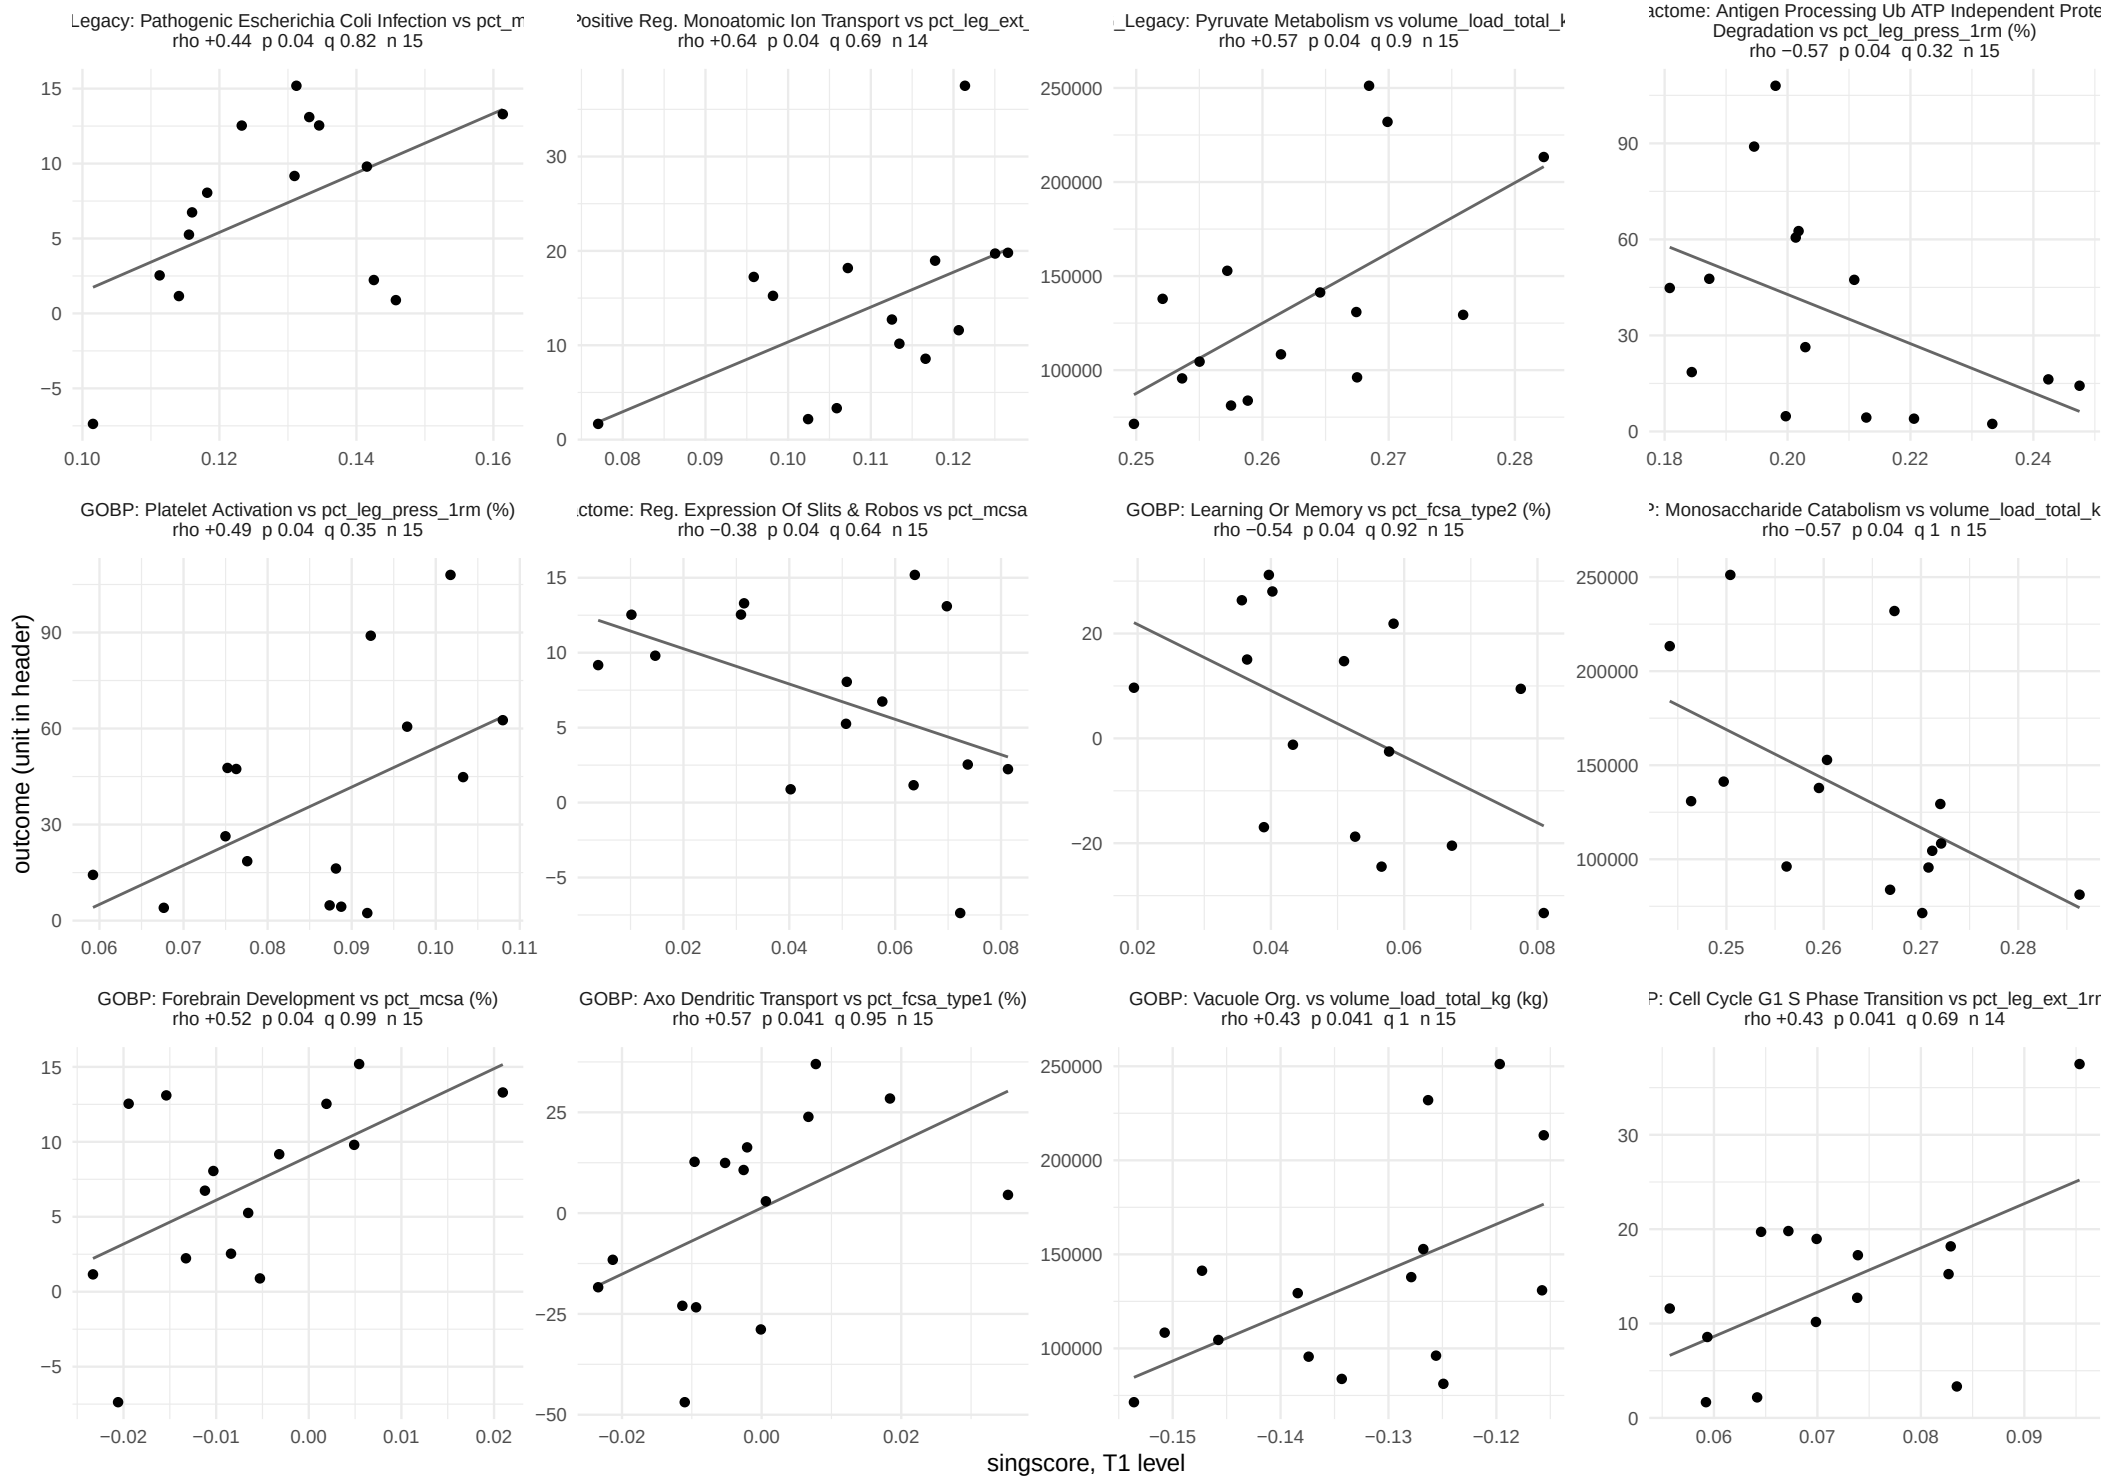

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, baseline window


439 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 30 of 37.

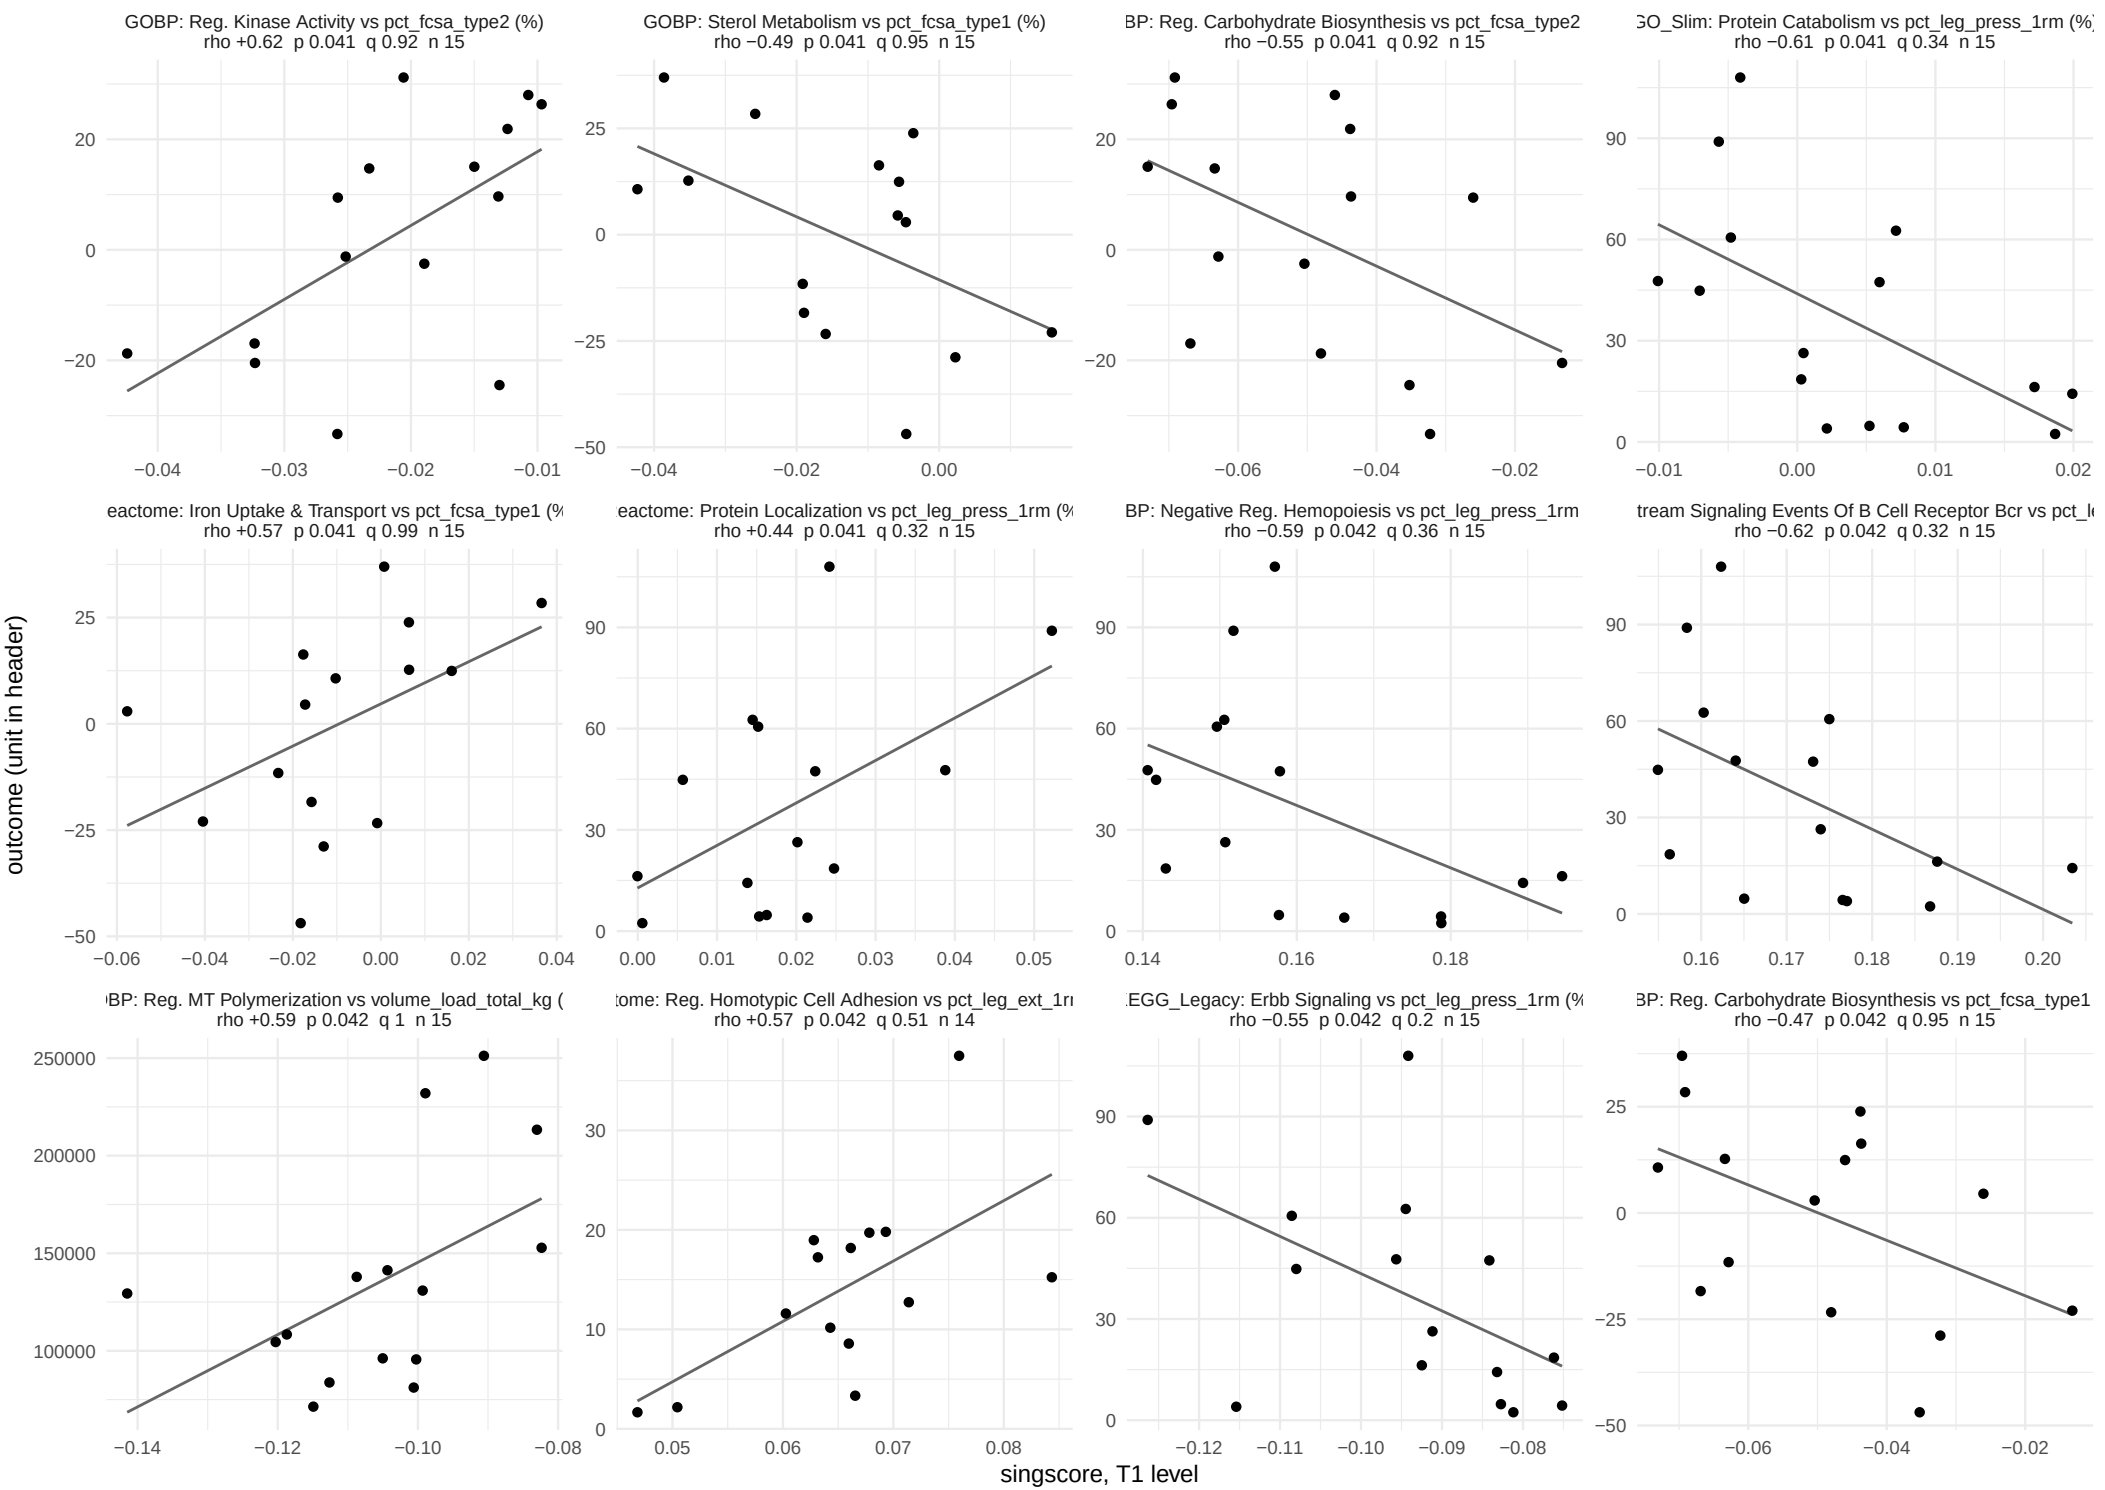

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, baseline window


439 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 31 of 37.

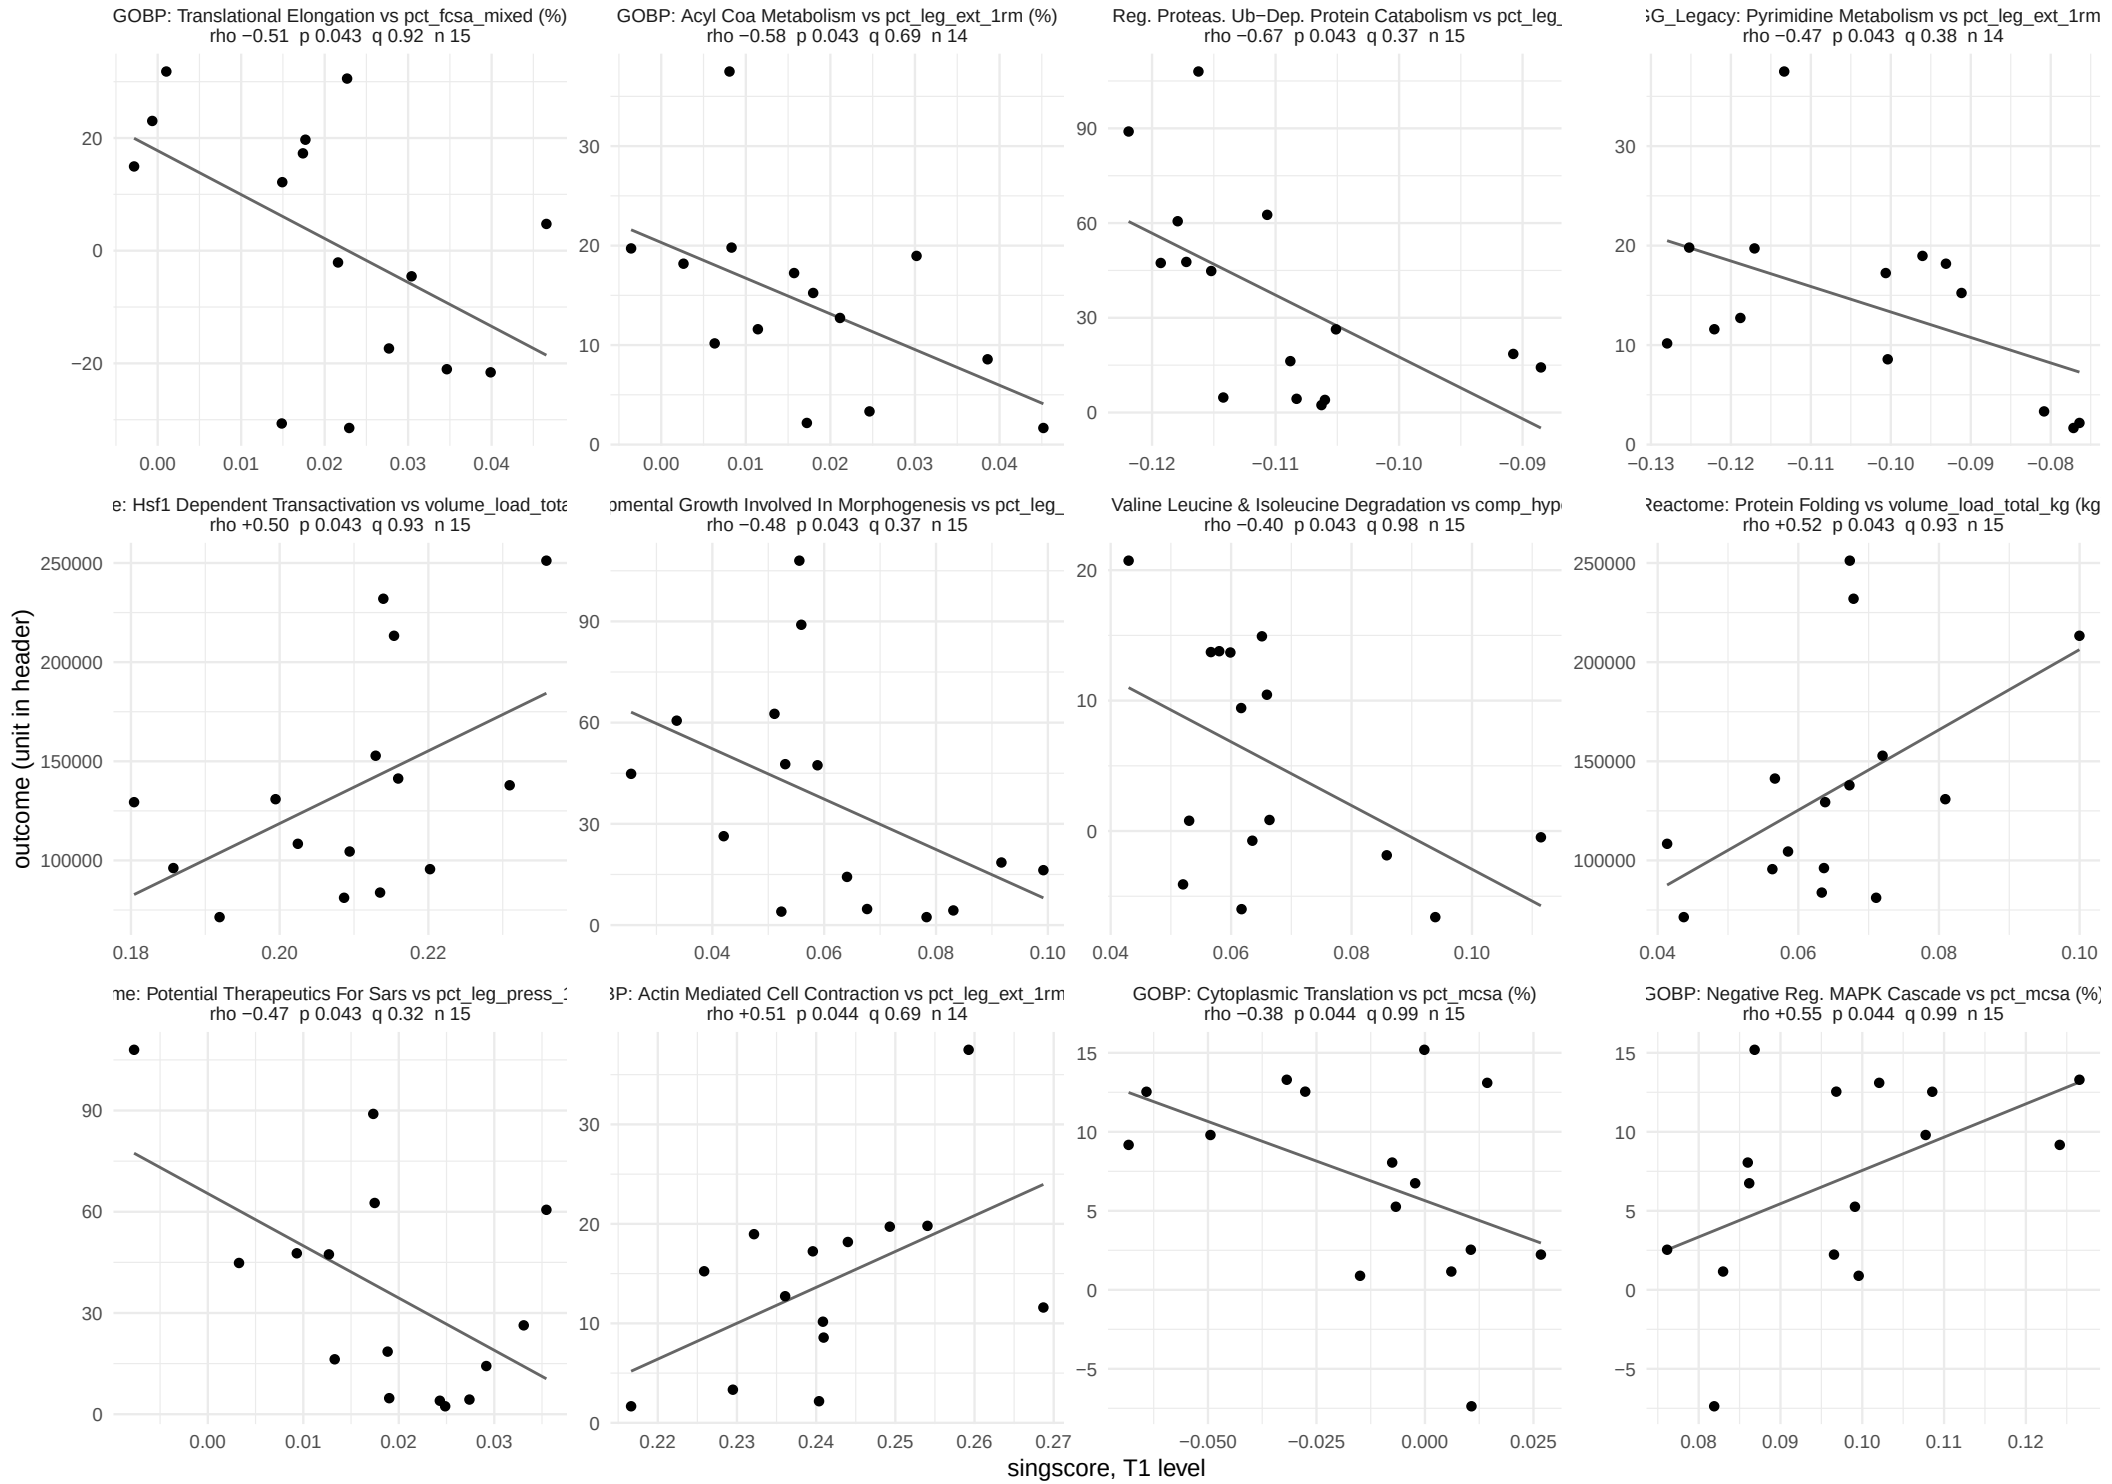

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, baseline window


439 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 32 of 37.

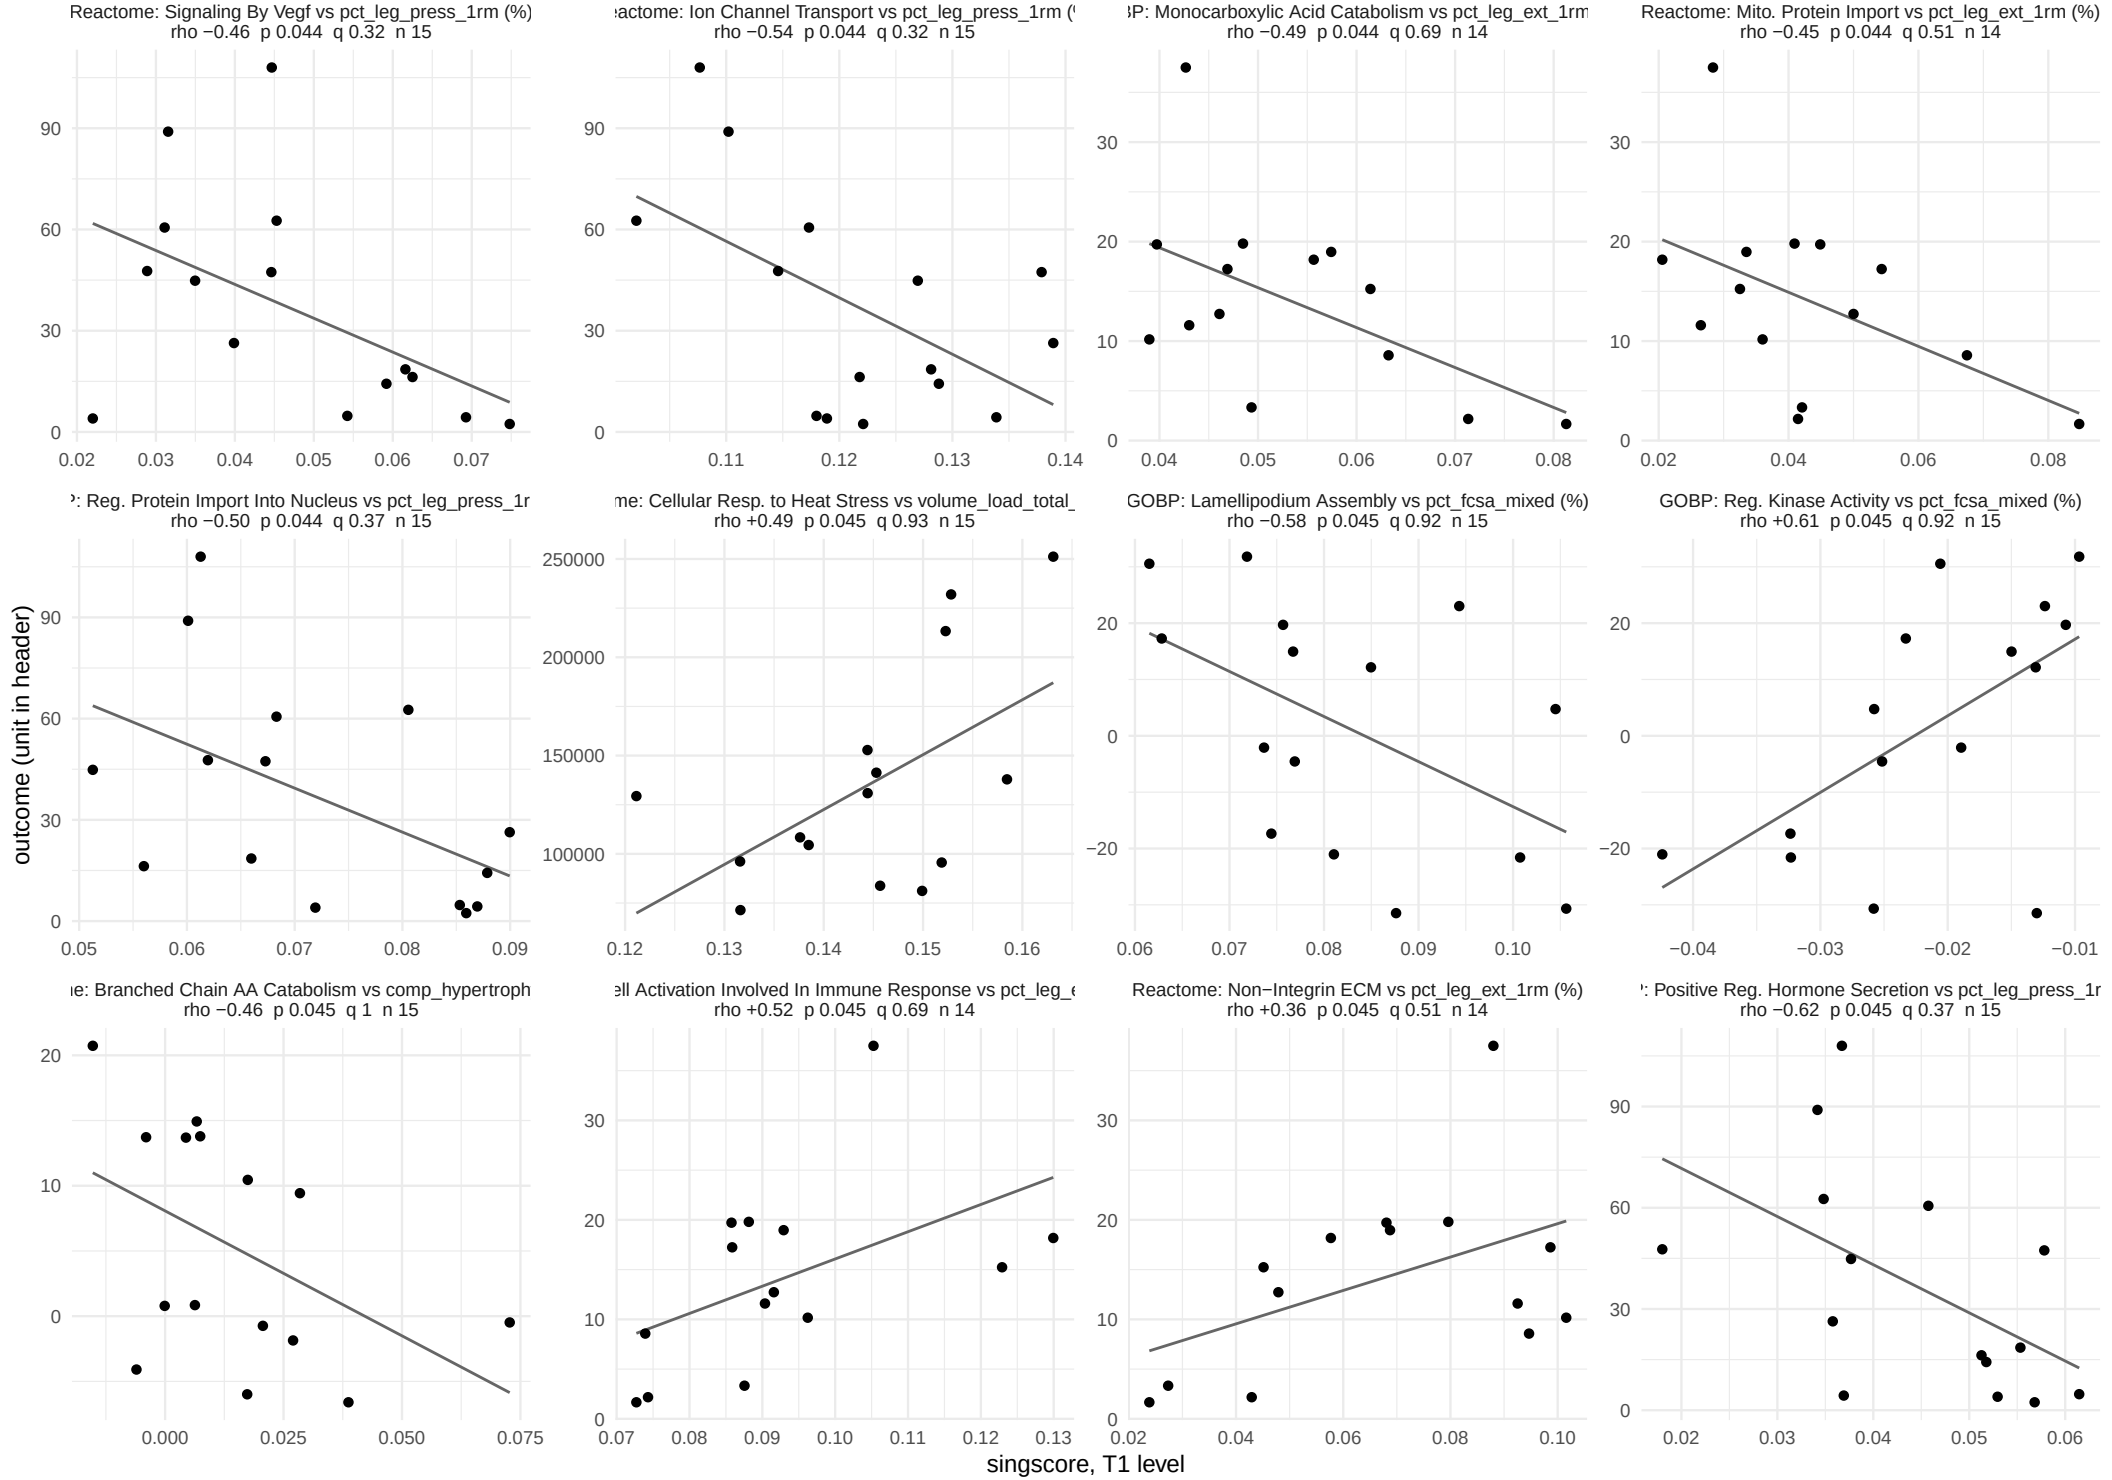

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, baseline window


439 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 33 of 37.

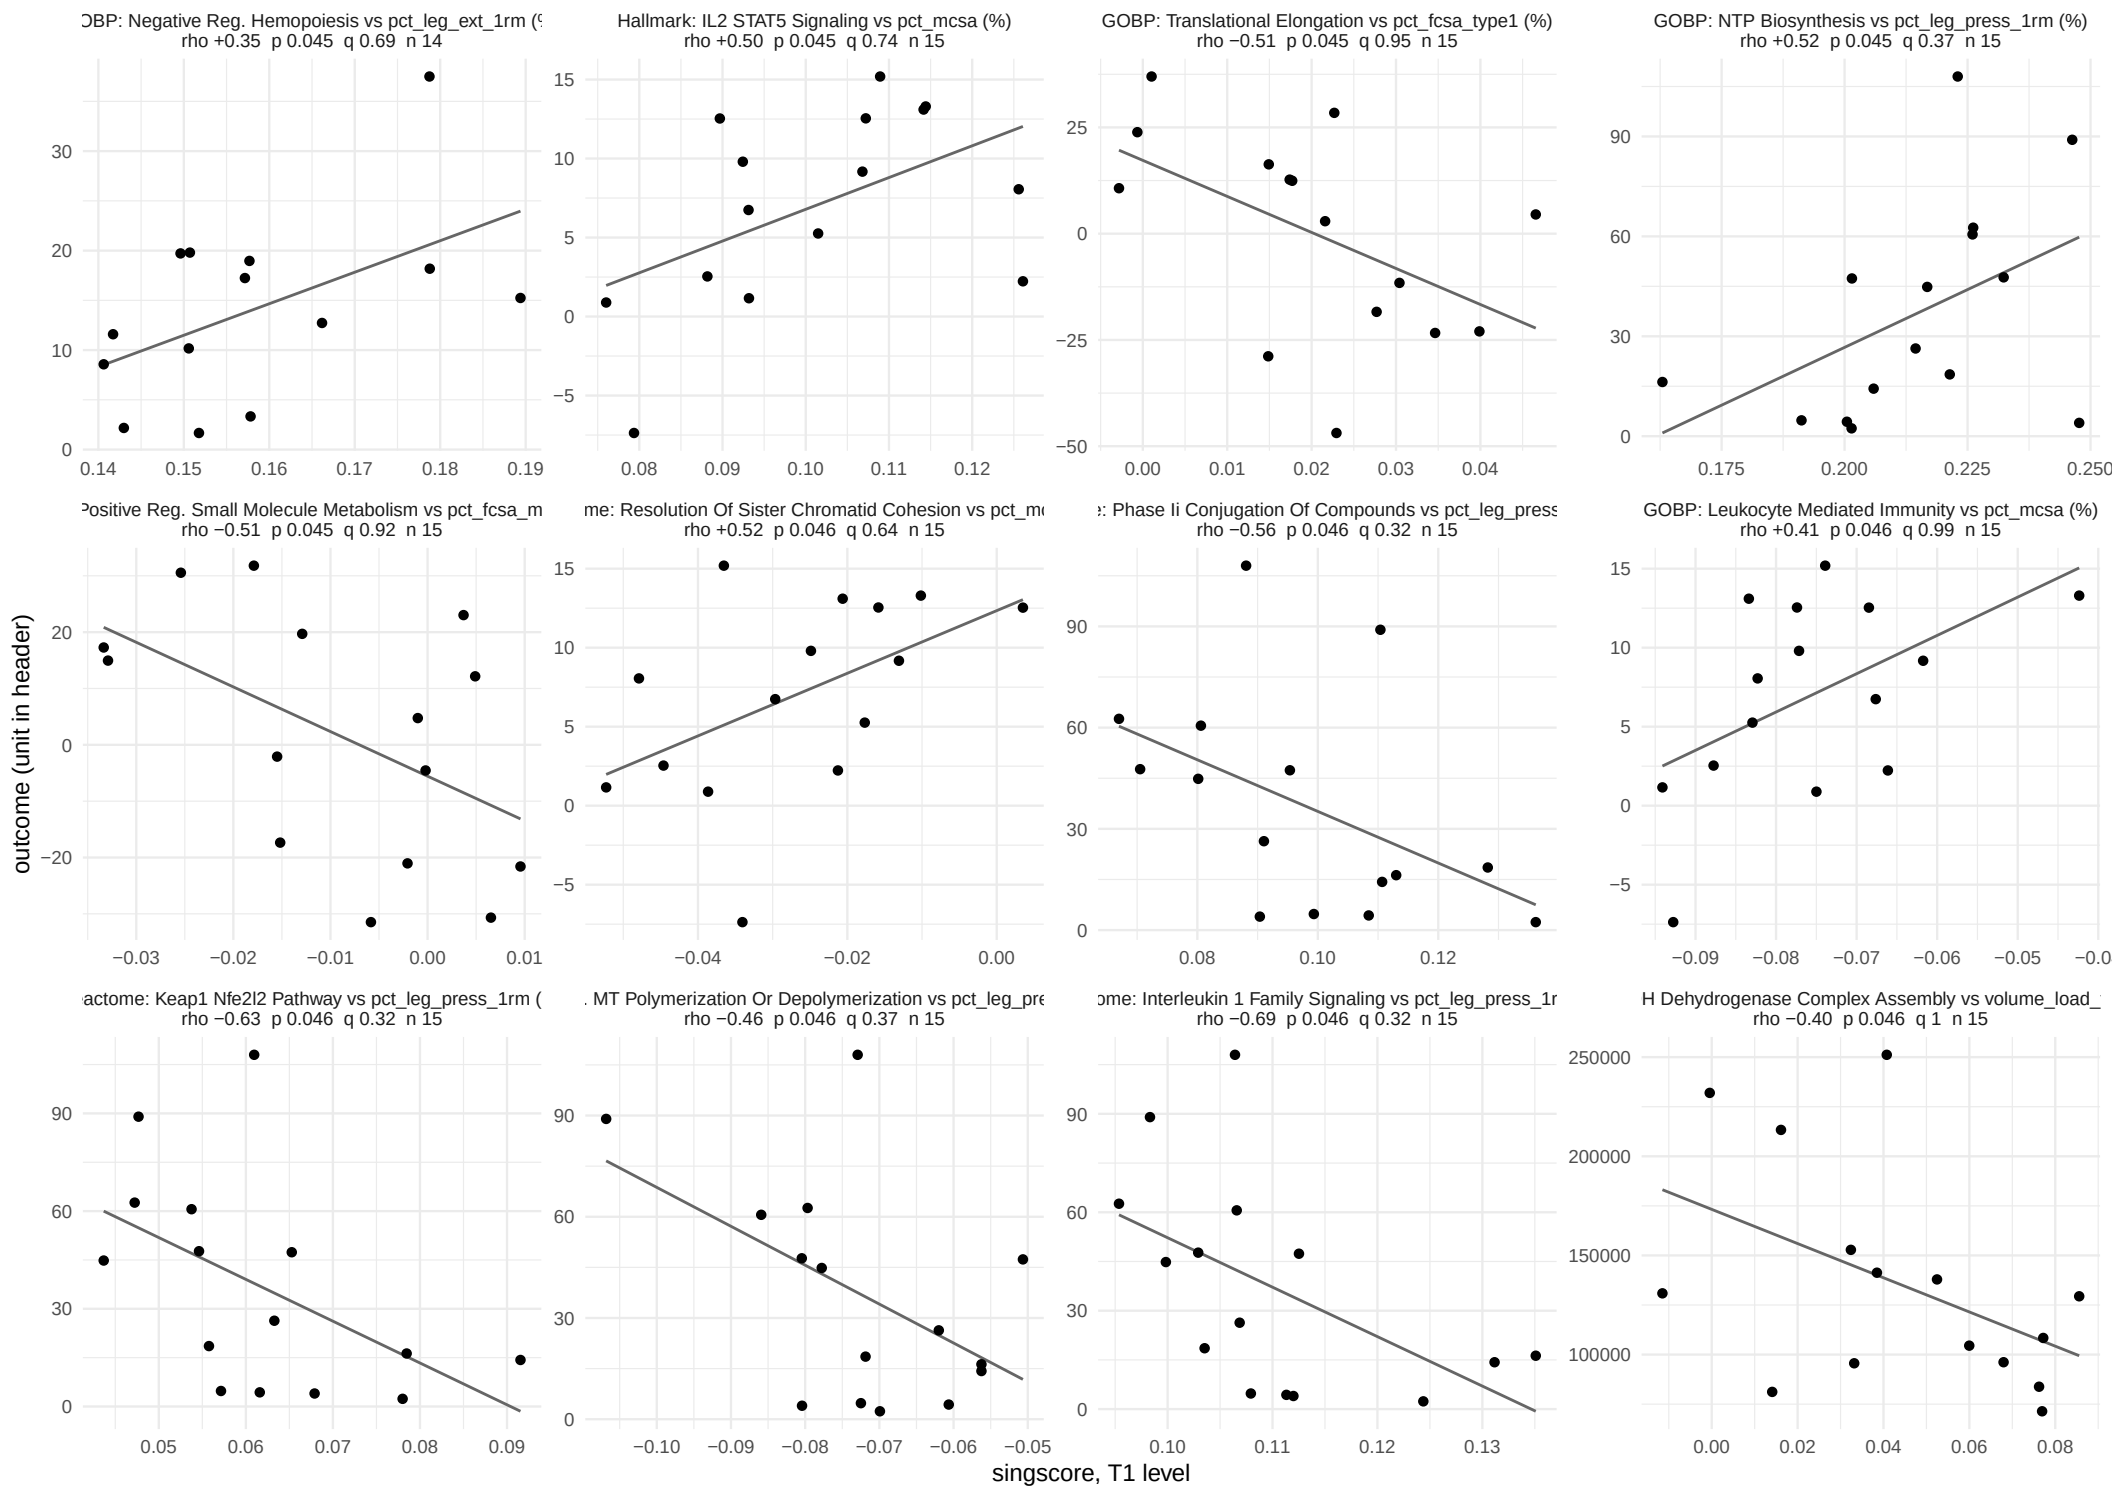

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, baseline window


439 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 34 of 37.

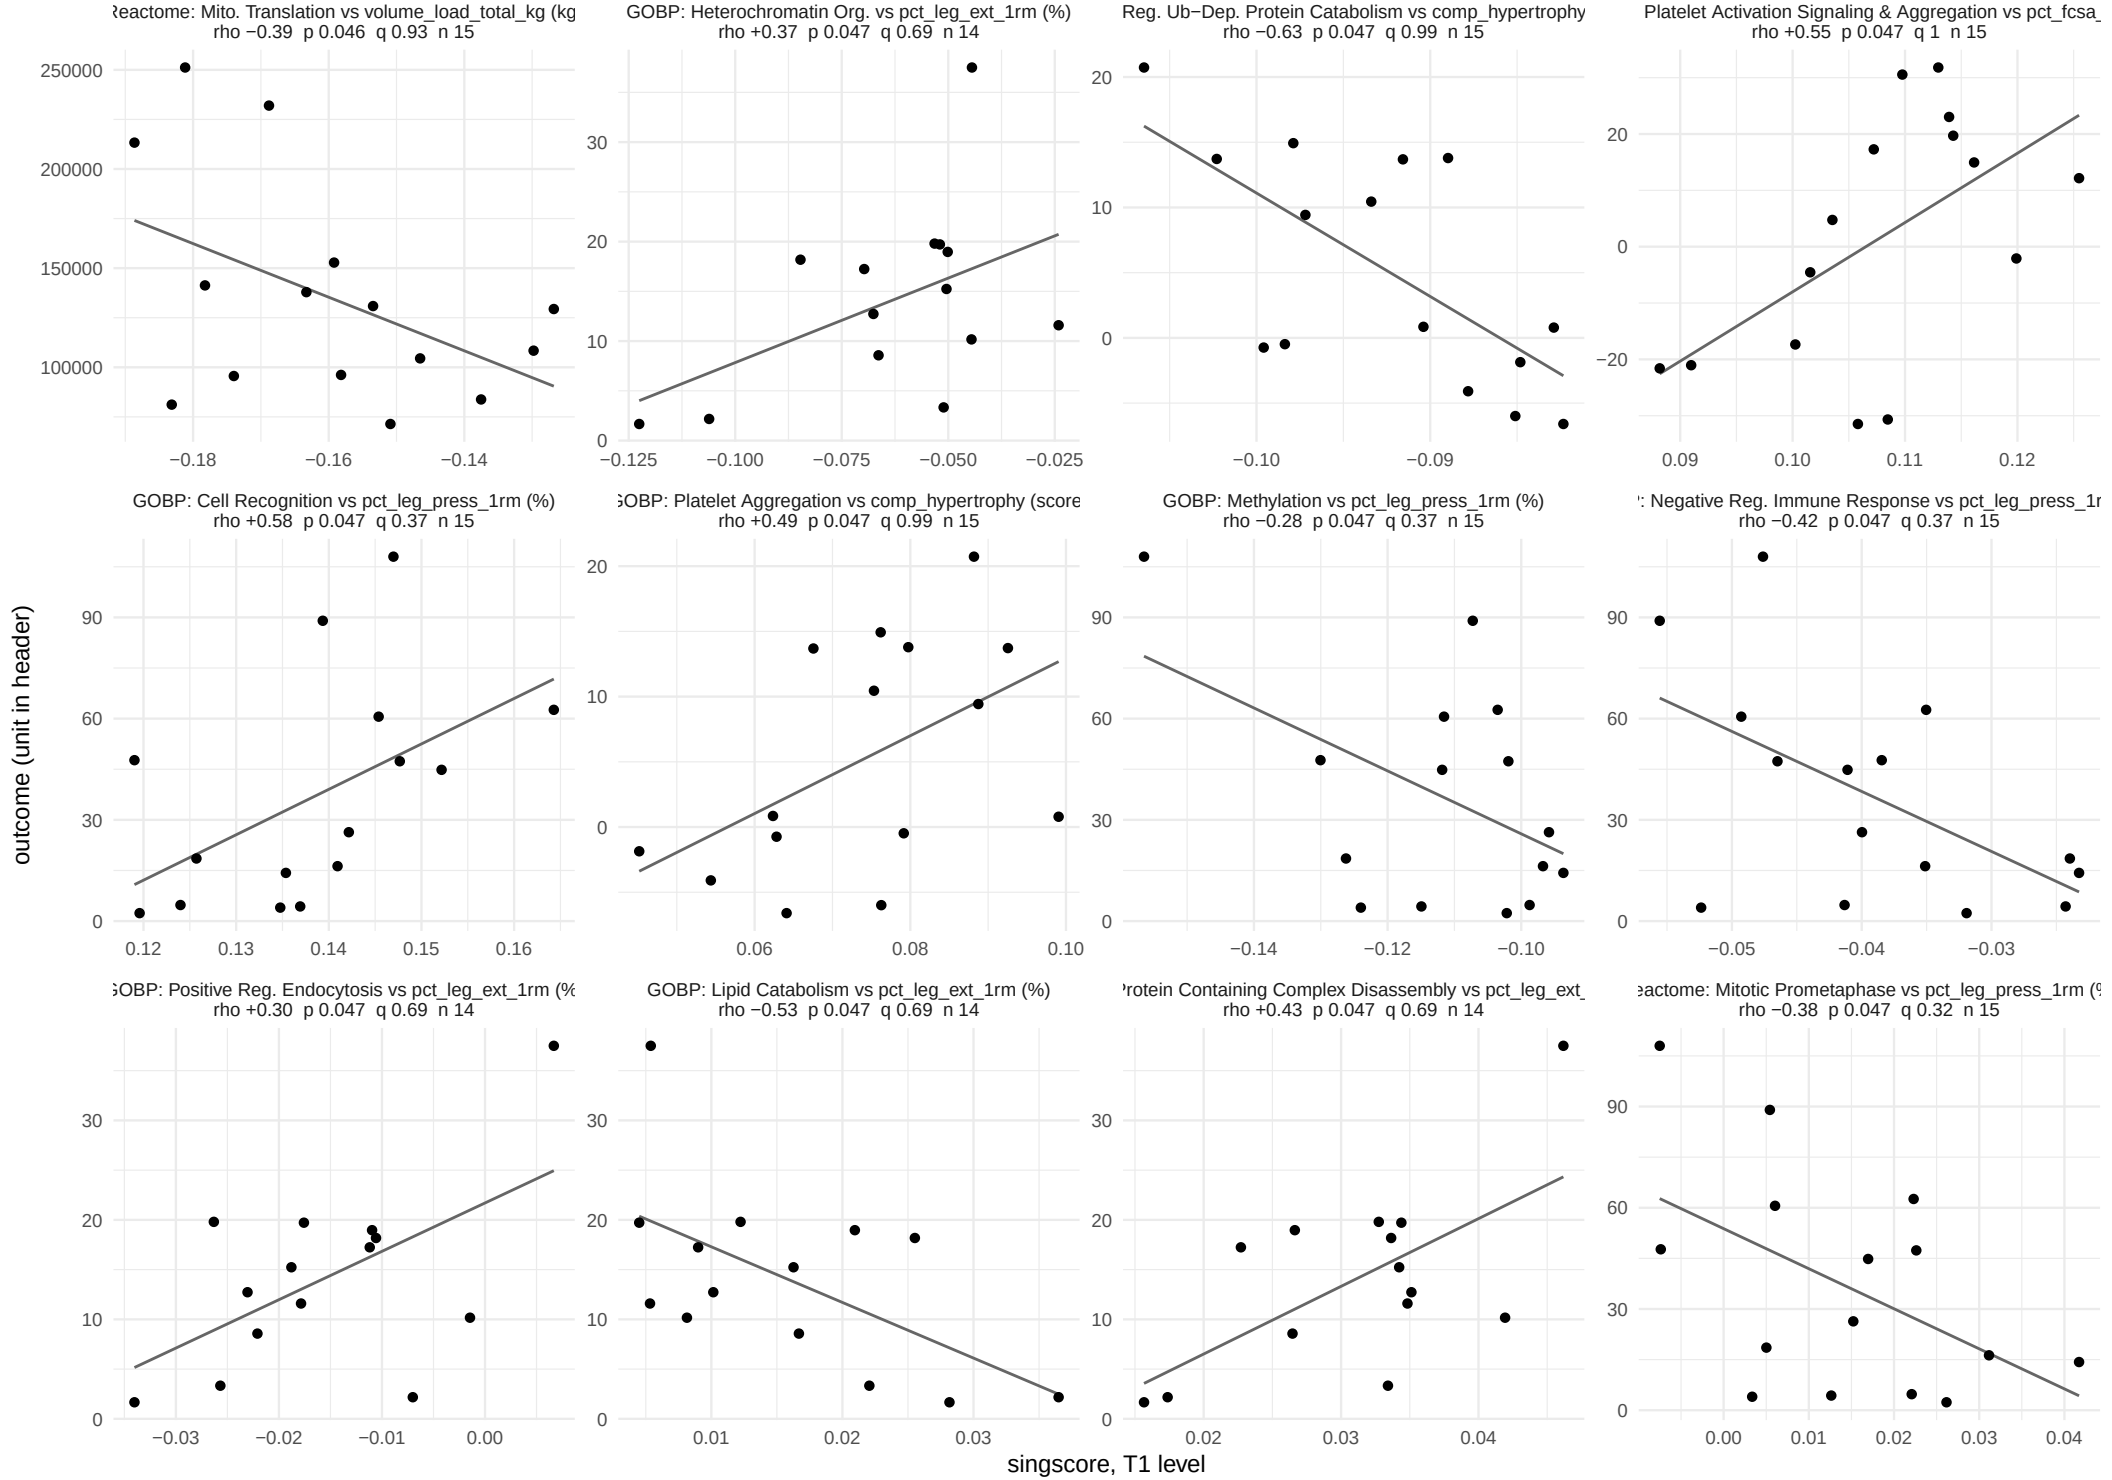

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, baseline window


439 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 35 of 37.

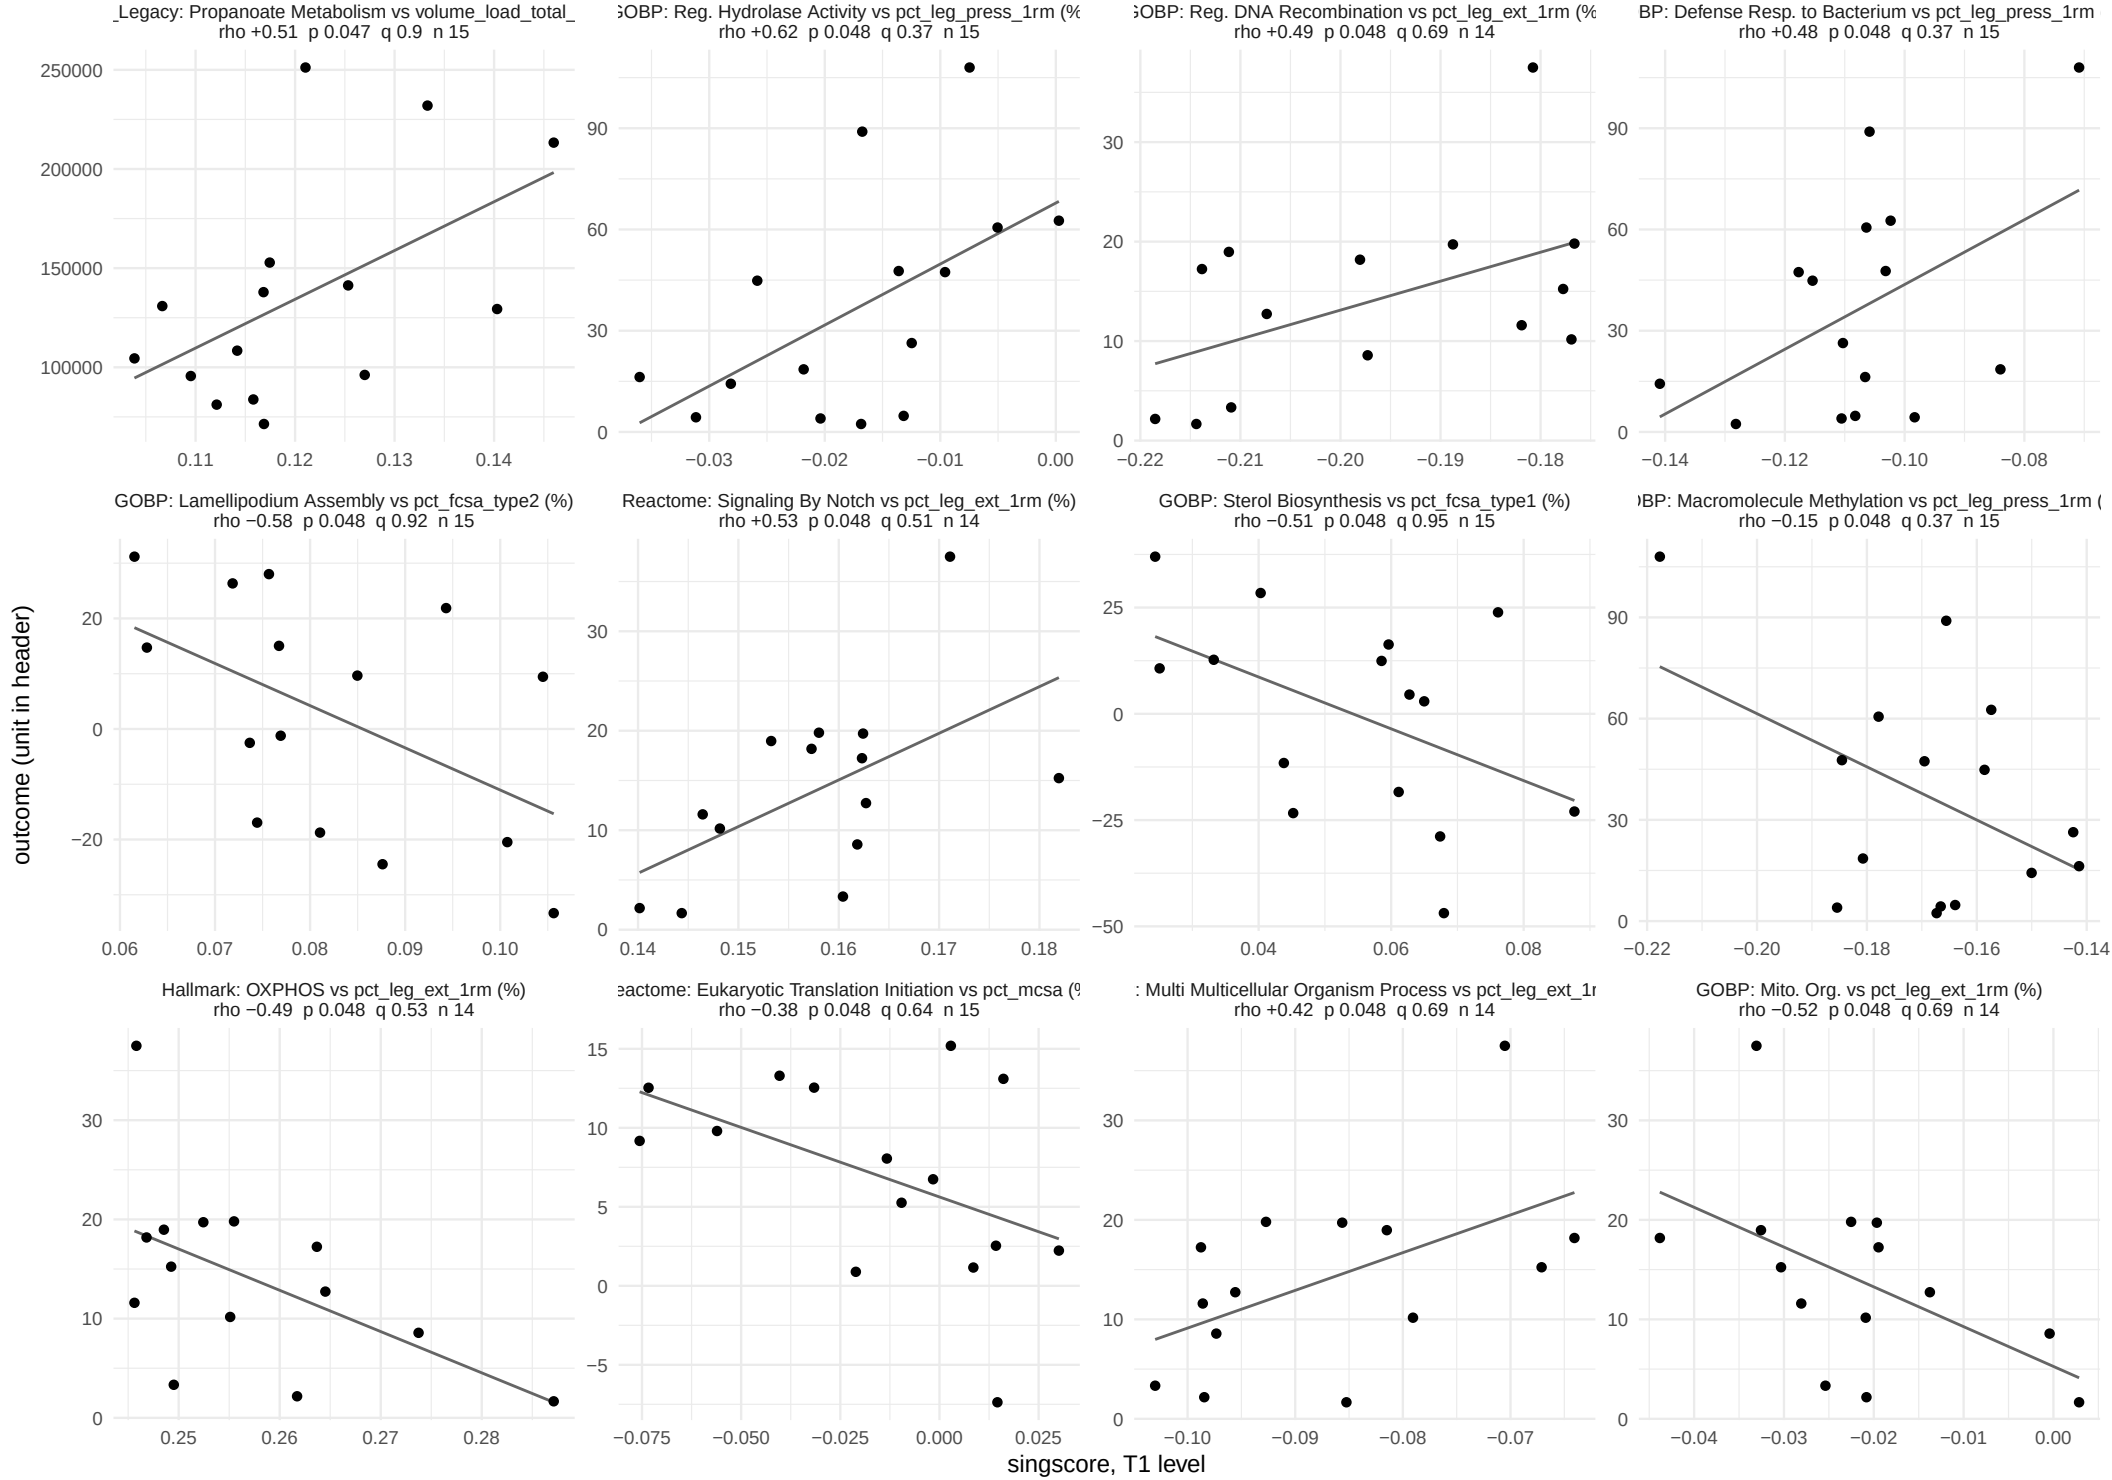

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, baseline window


439 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 36 of 37.

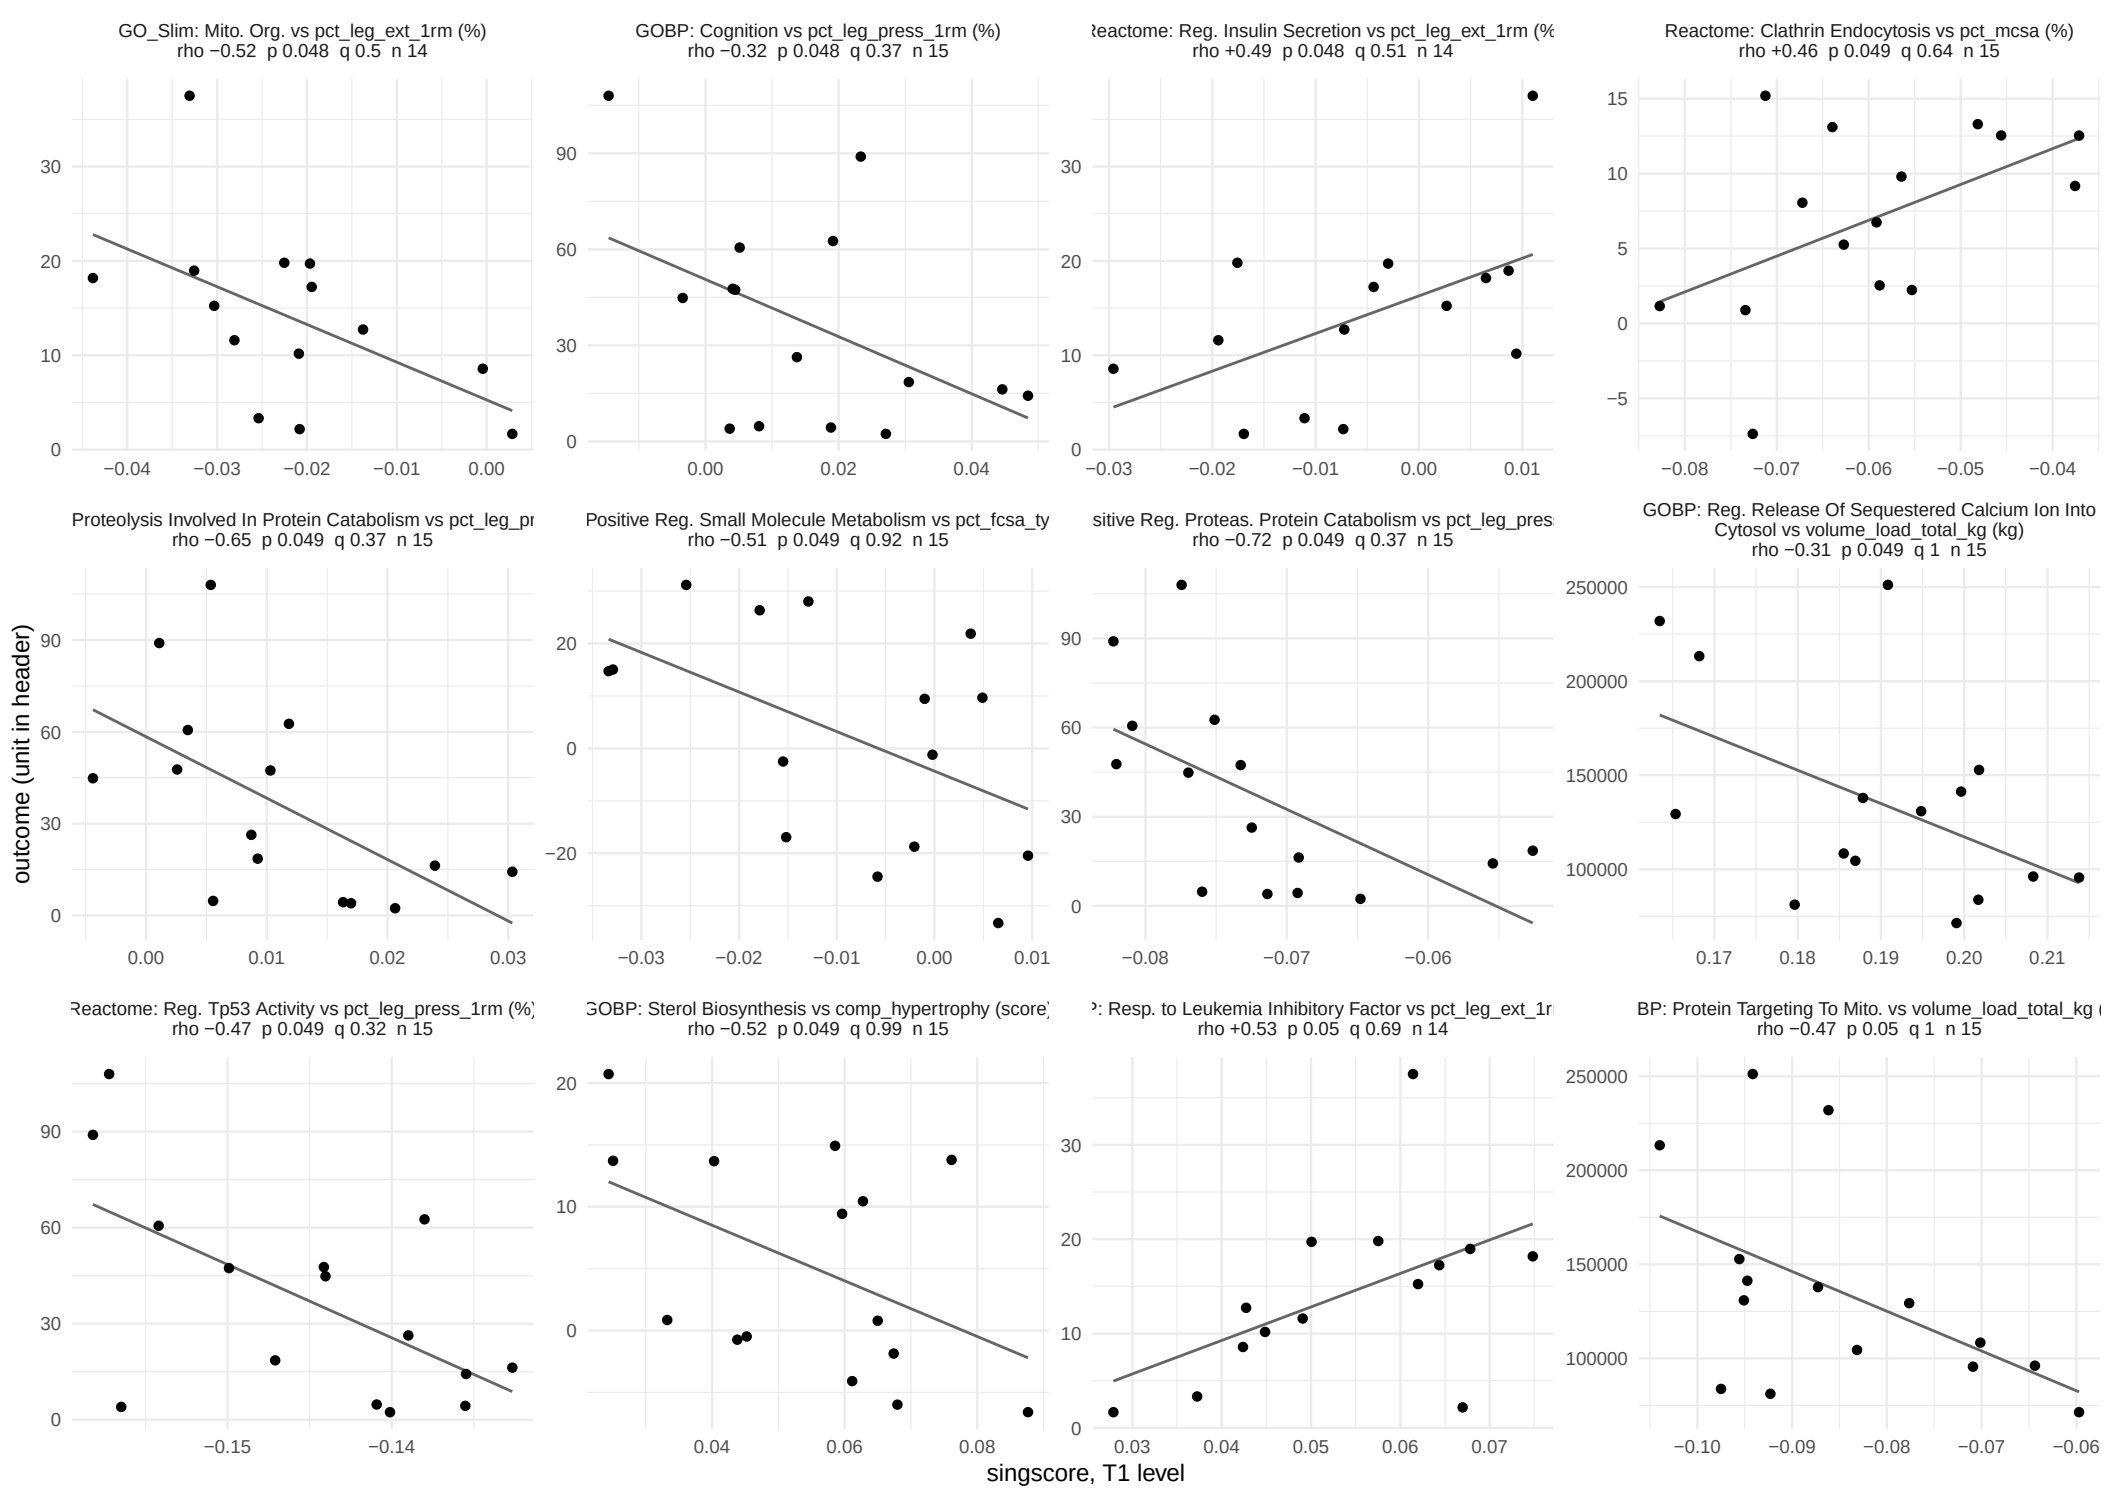

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, baseline window


439 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 37 of 37.

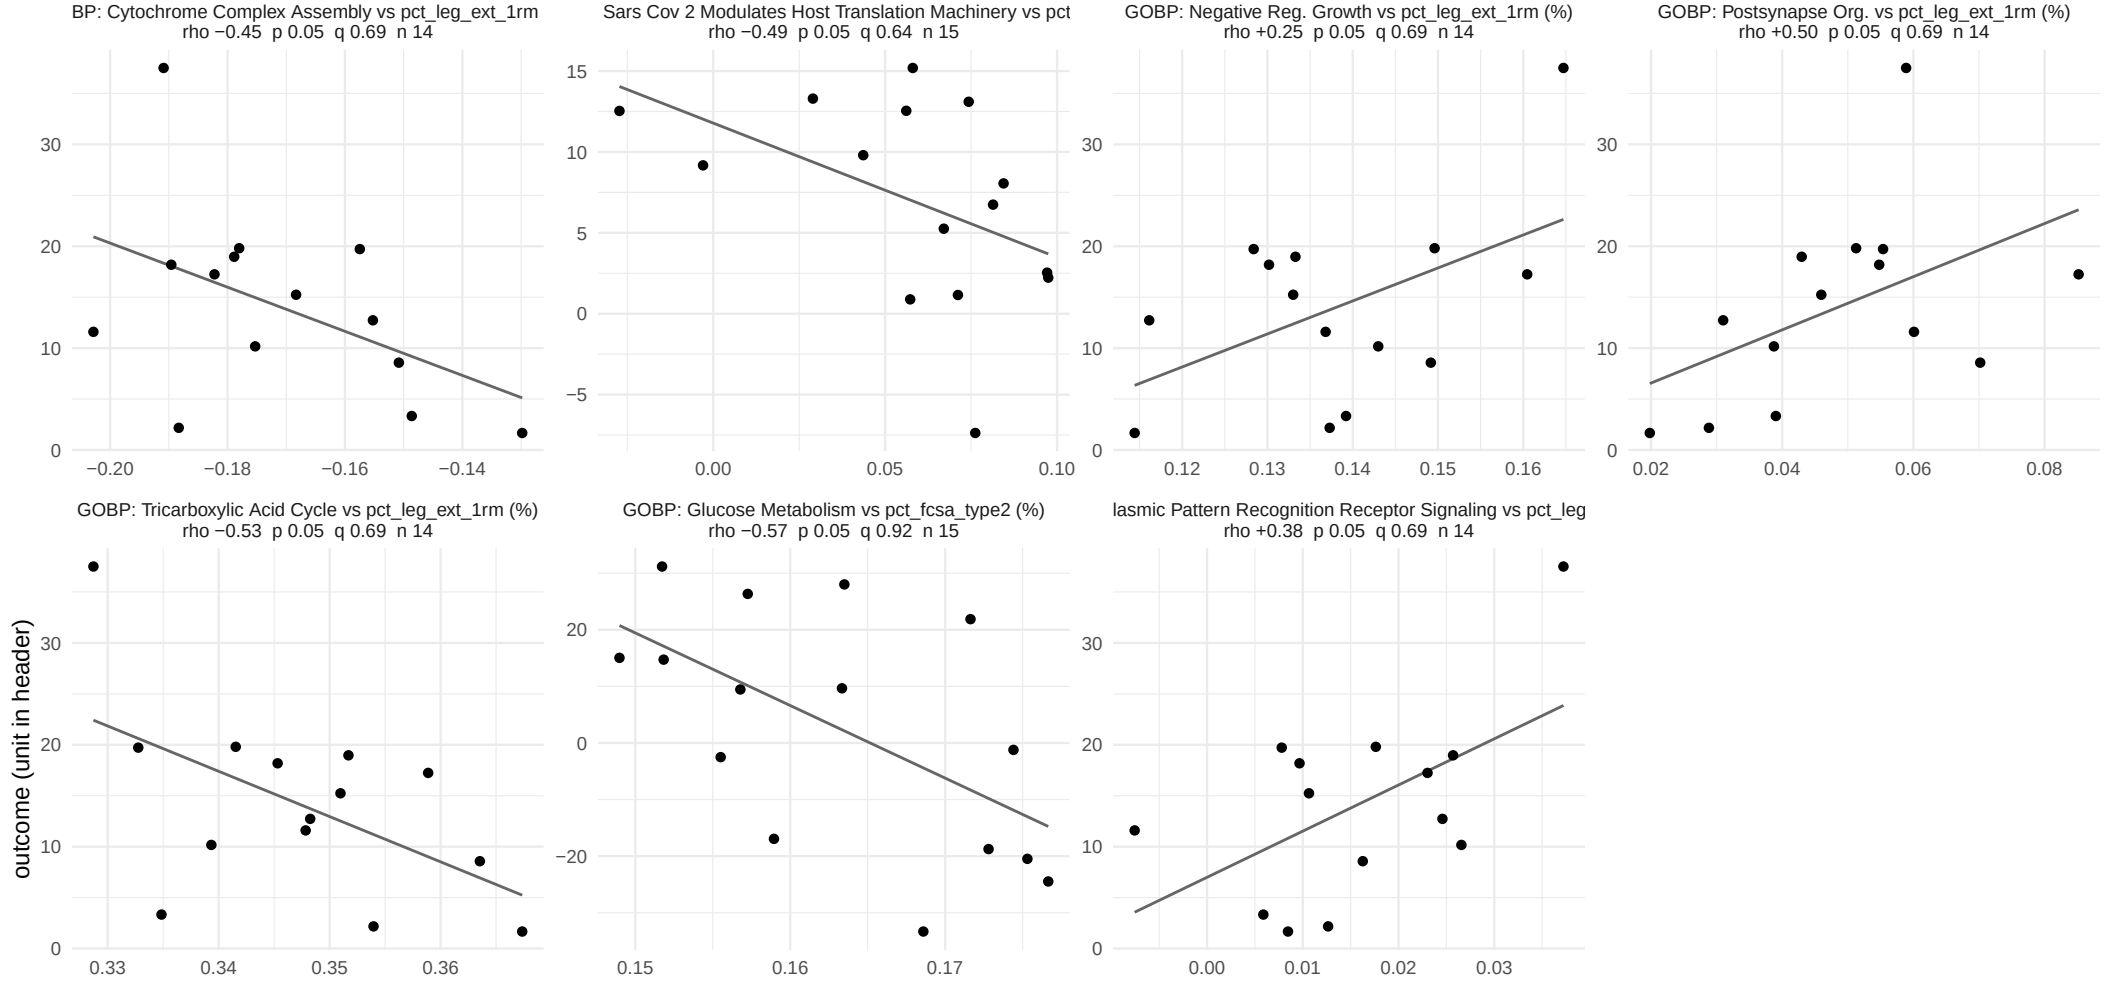

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, acute window


407 of 11024 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 1 of 34.

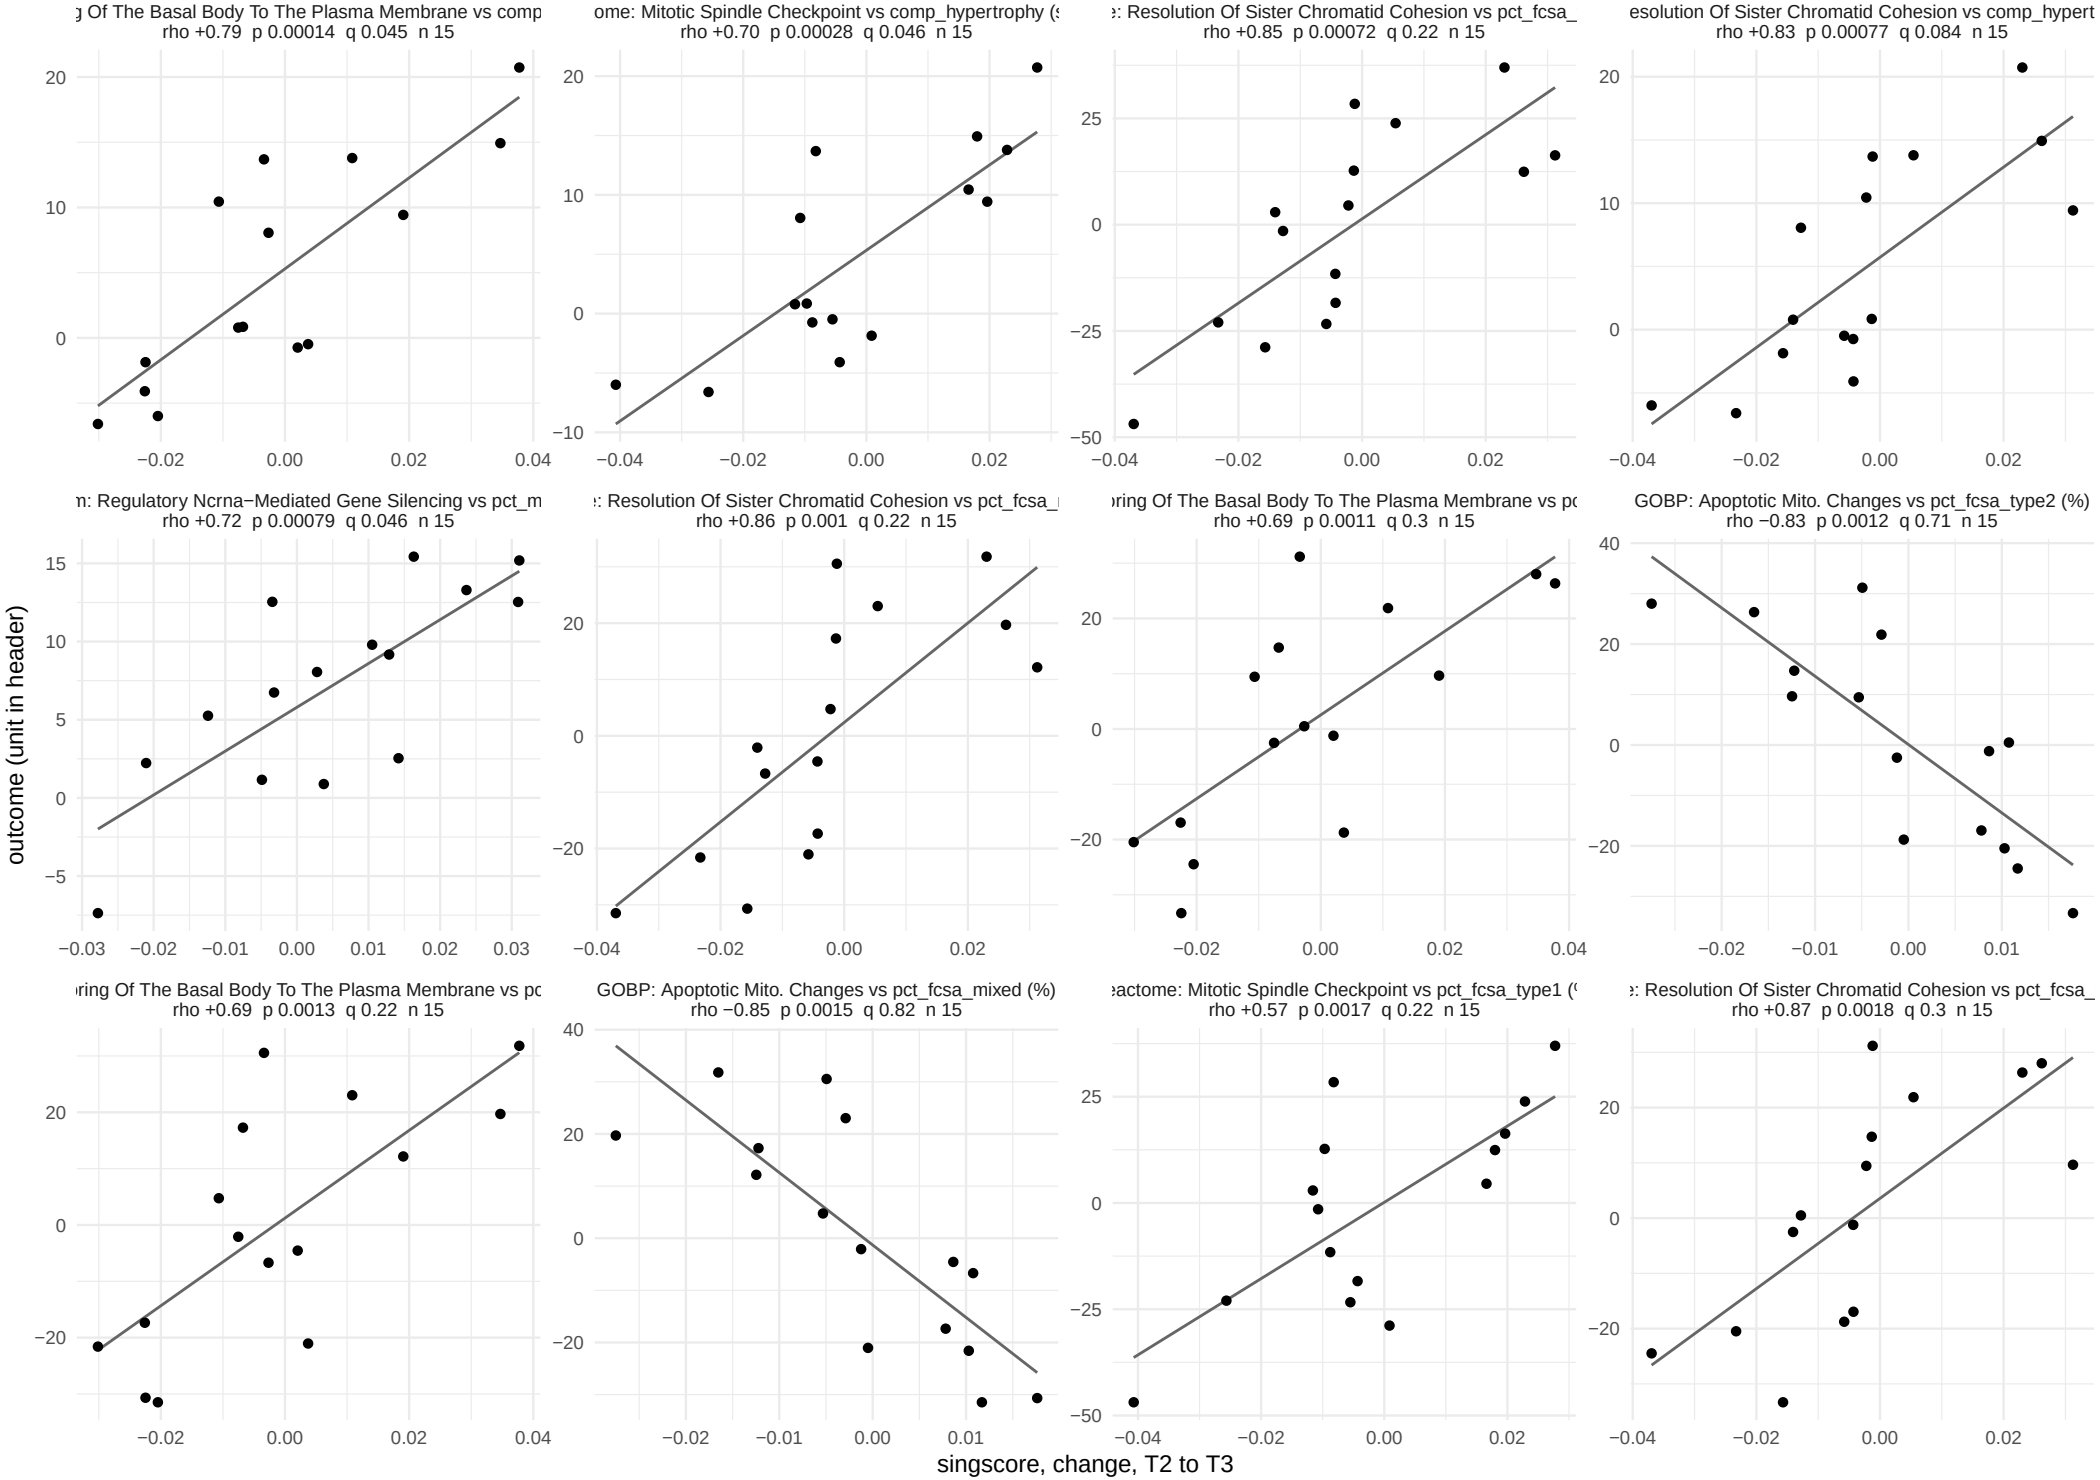

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, acute window


407 of 11024 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 2 of 34.

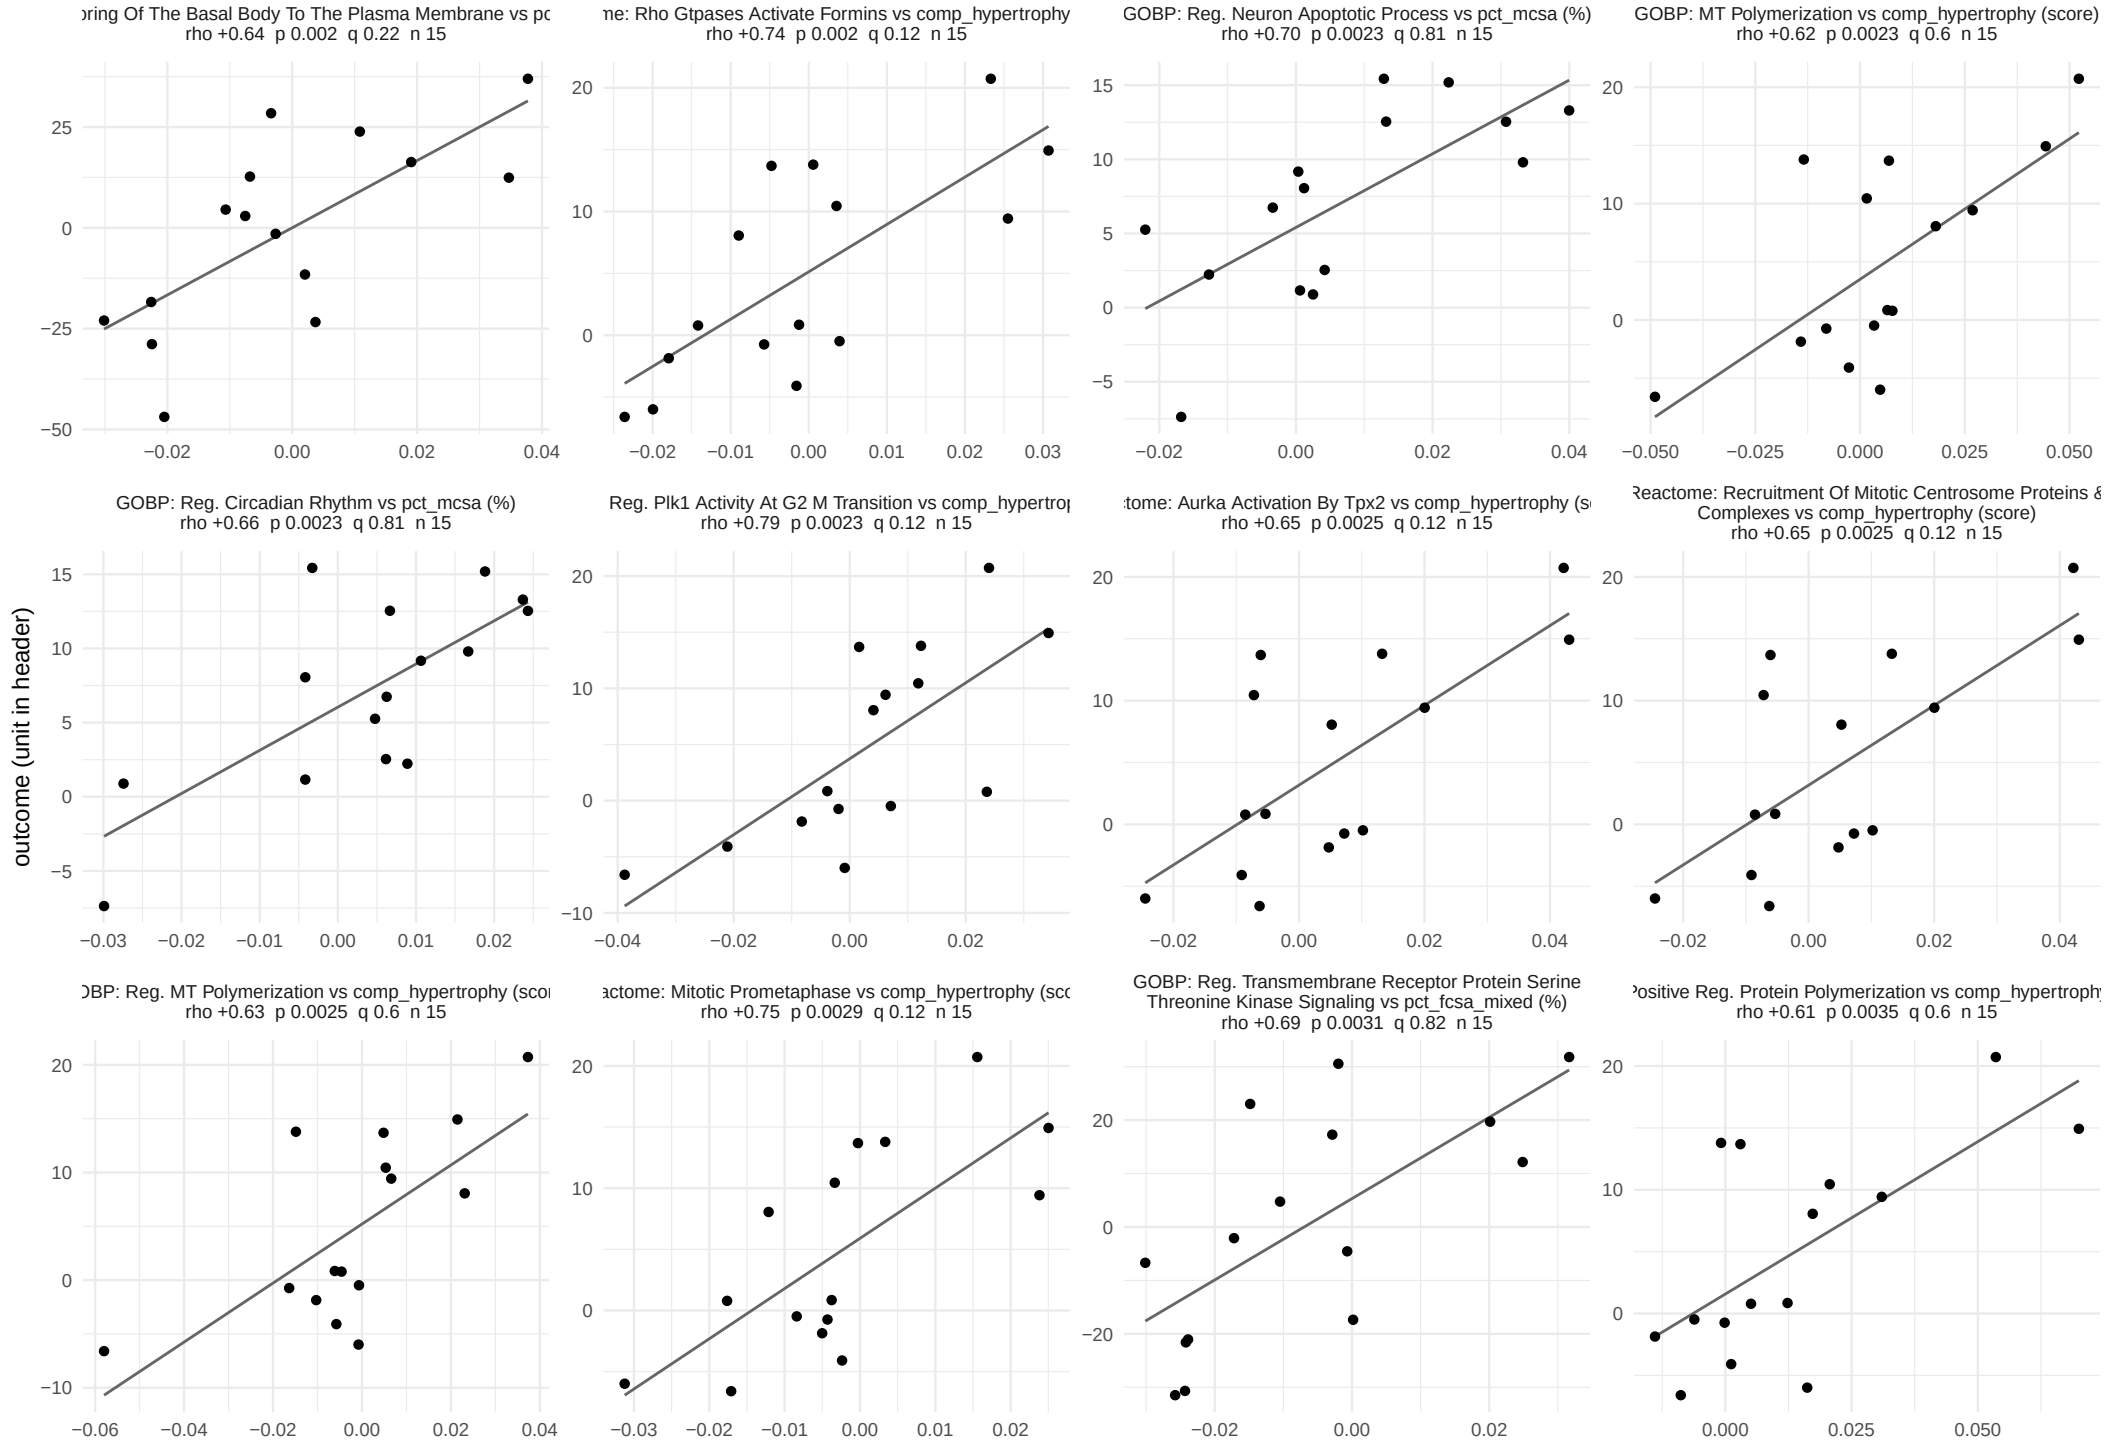

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, acute window


407 of 11024 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 3 of 34.

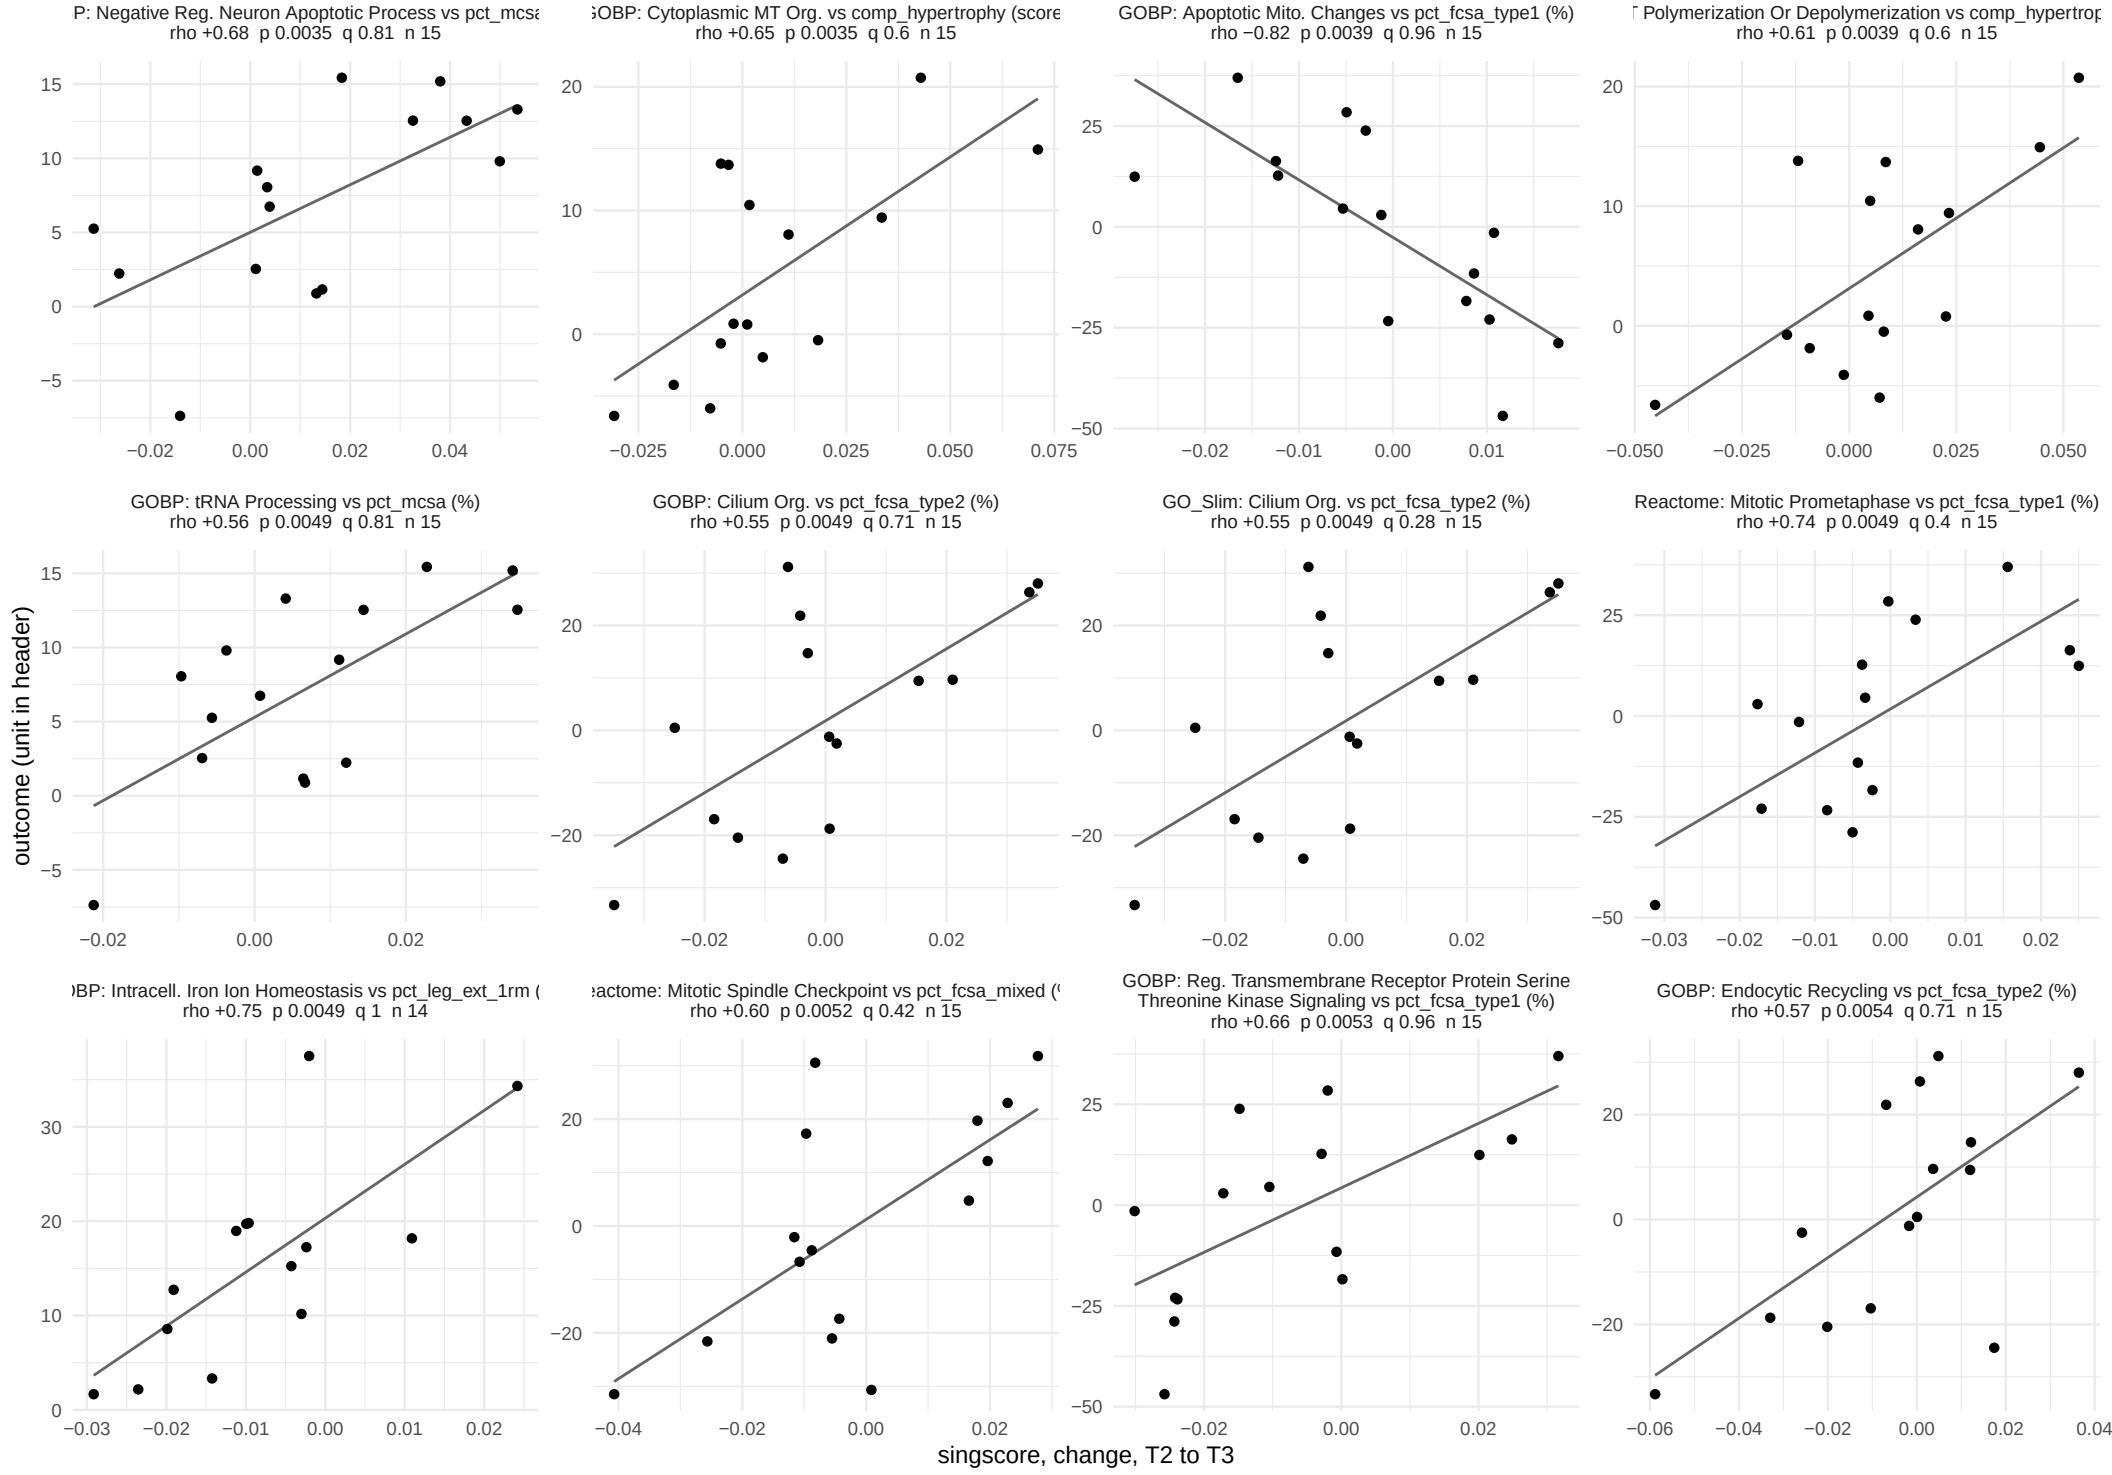

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, acute window


407 of 11024 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 4 of 34.

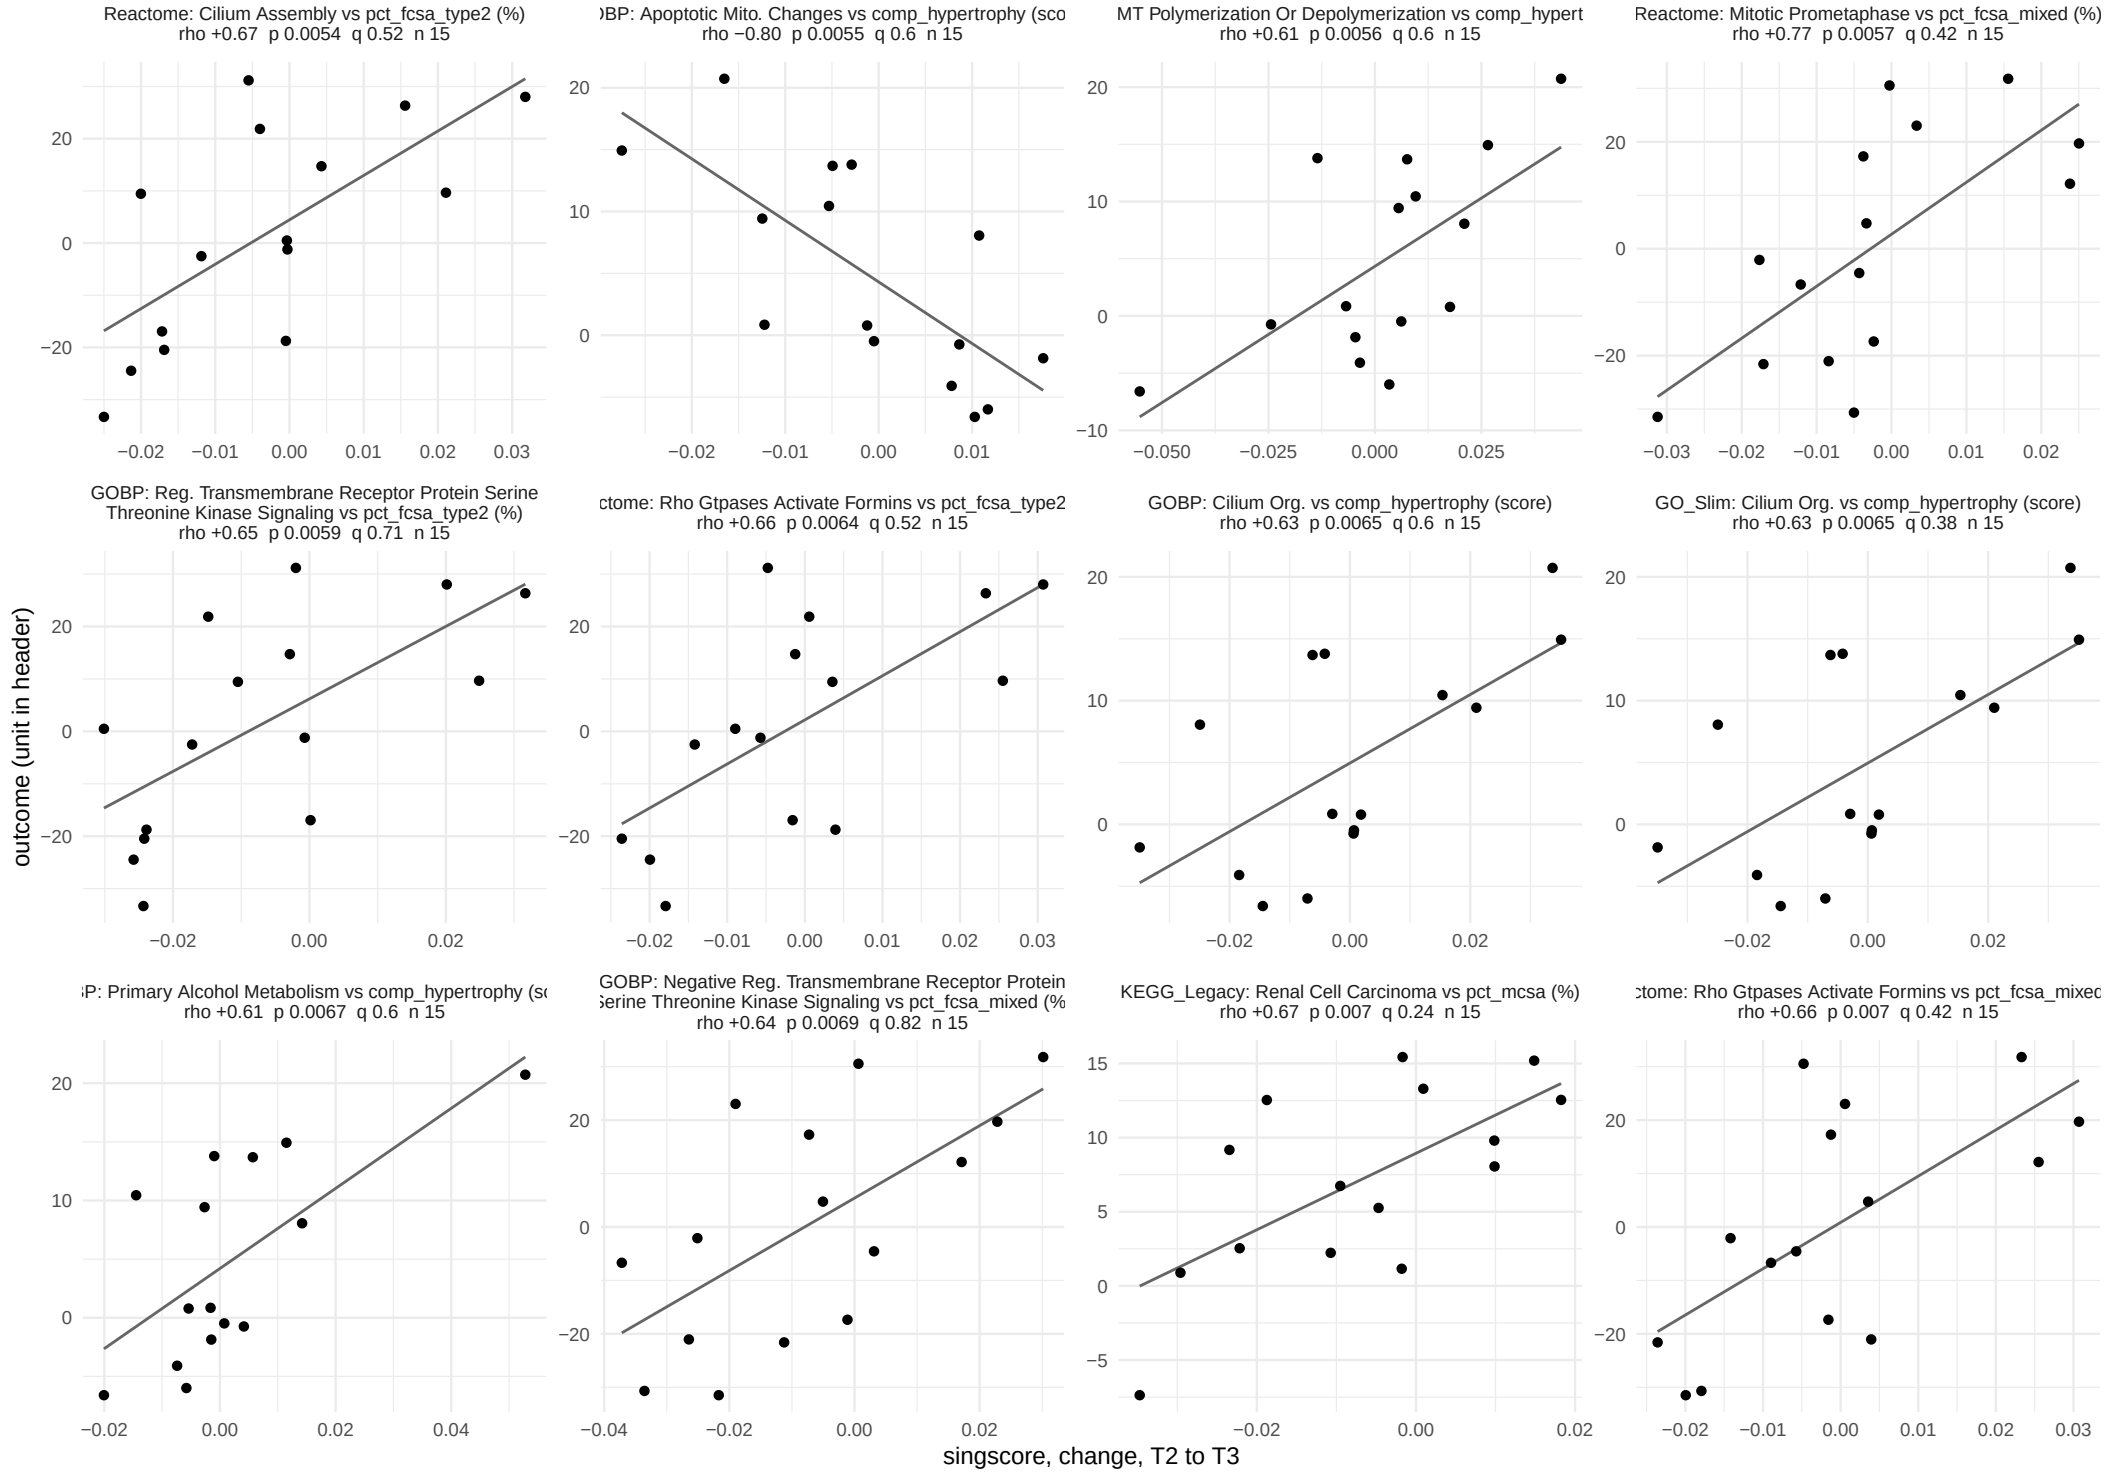

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, acute window


407 of 11024 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 5 of 34.

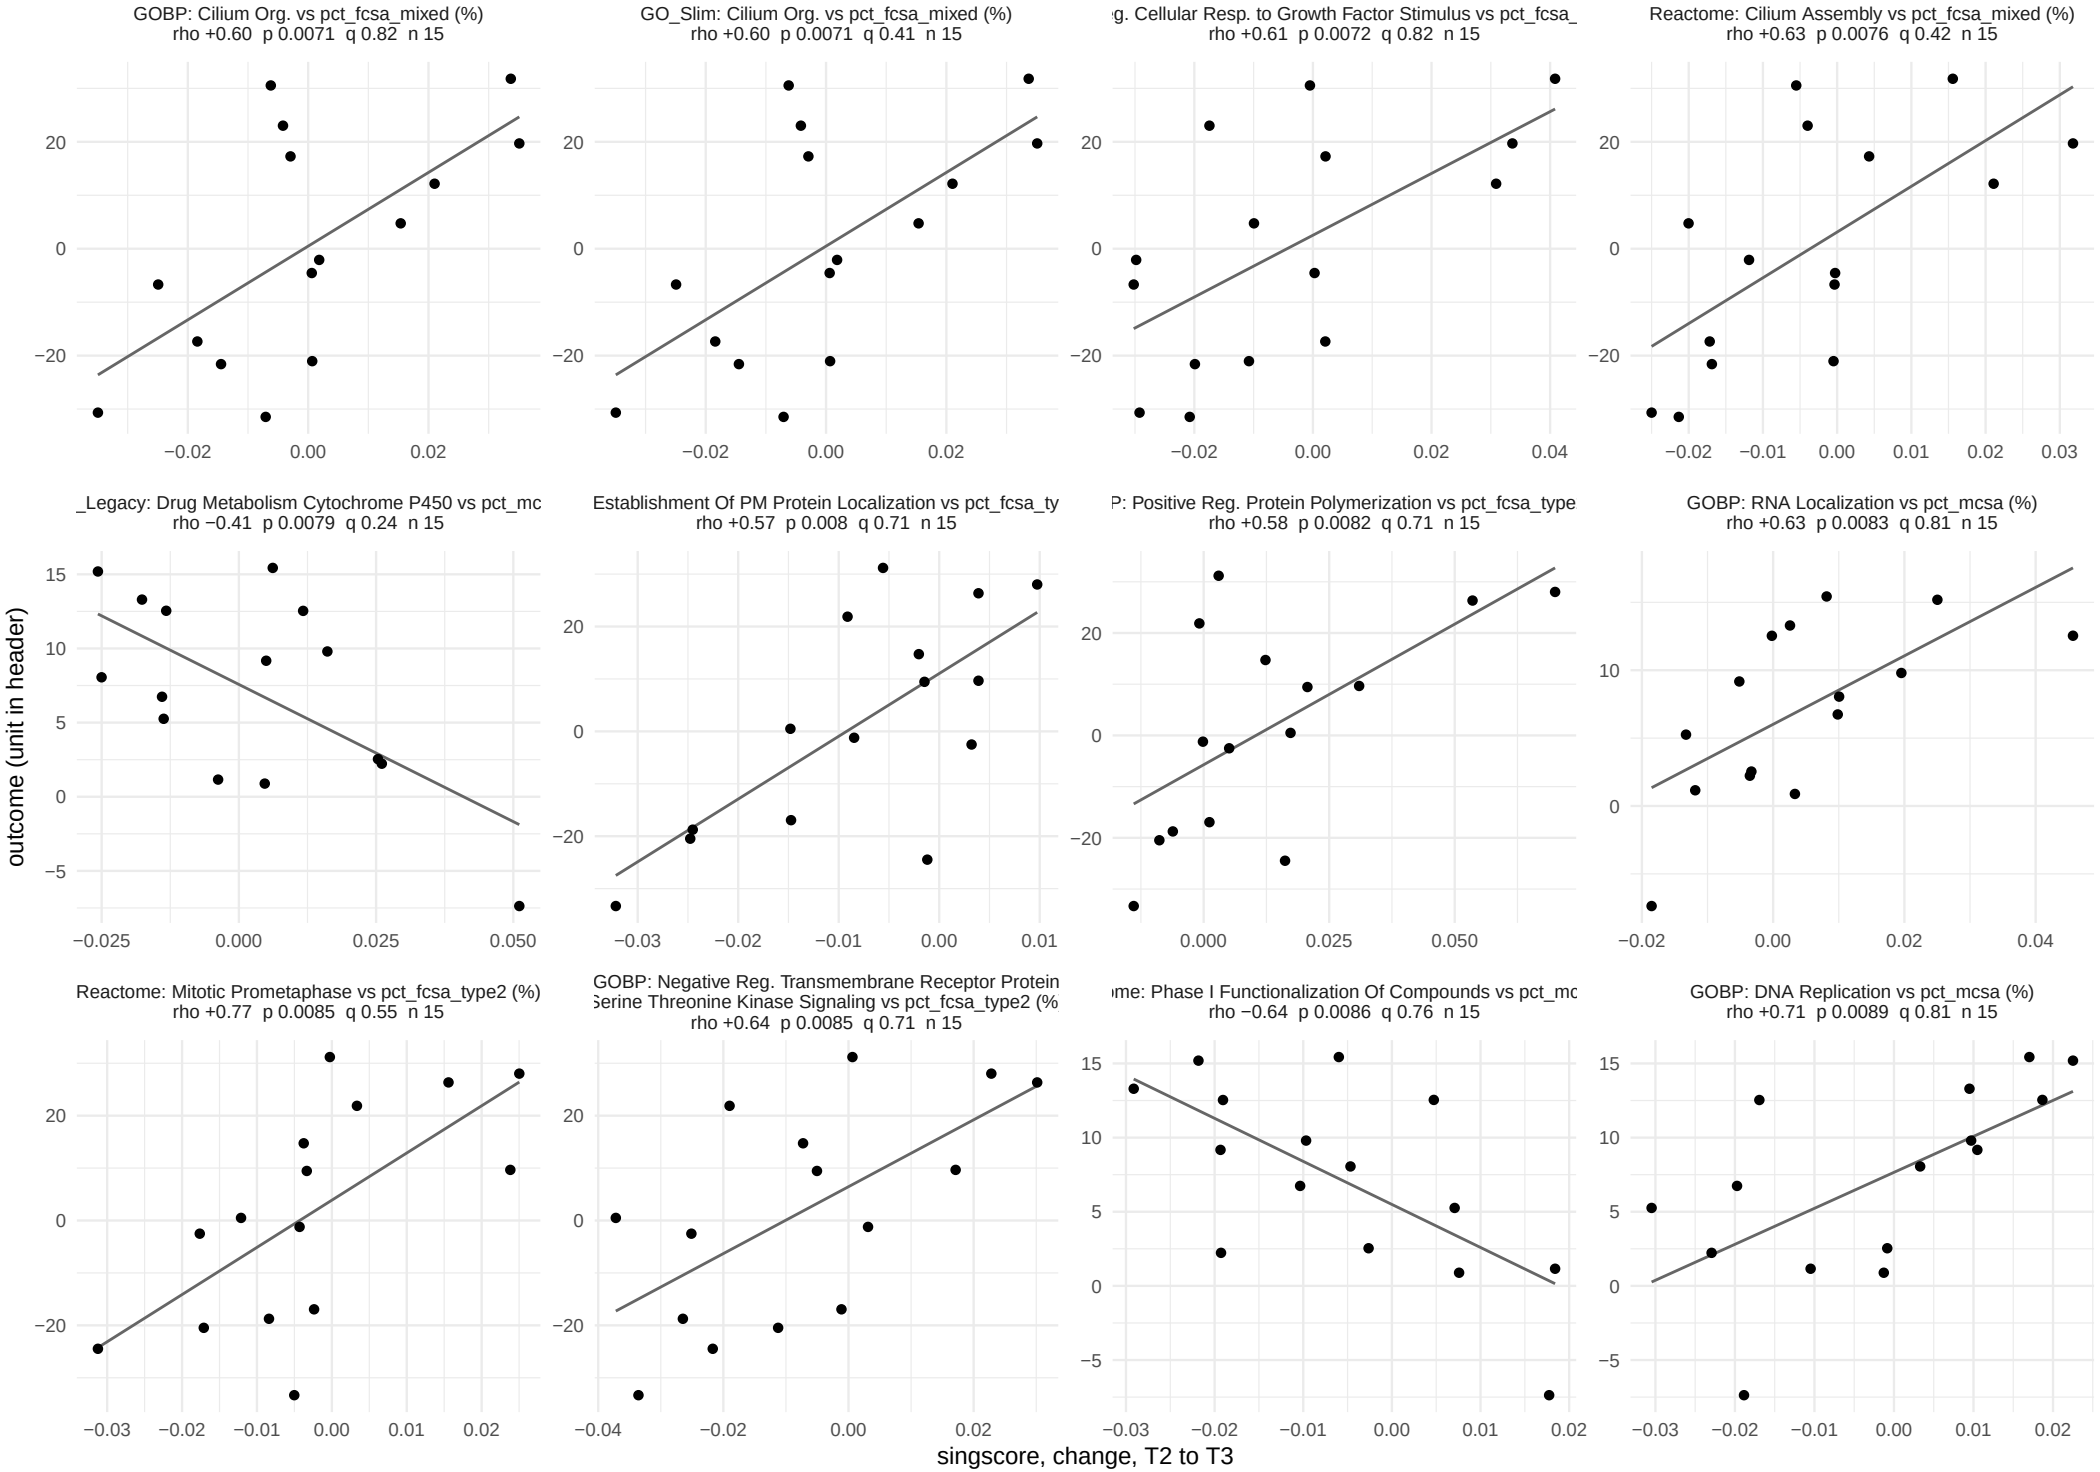

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, acute window


407 of 11024 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 6 of 34.

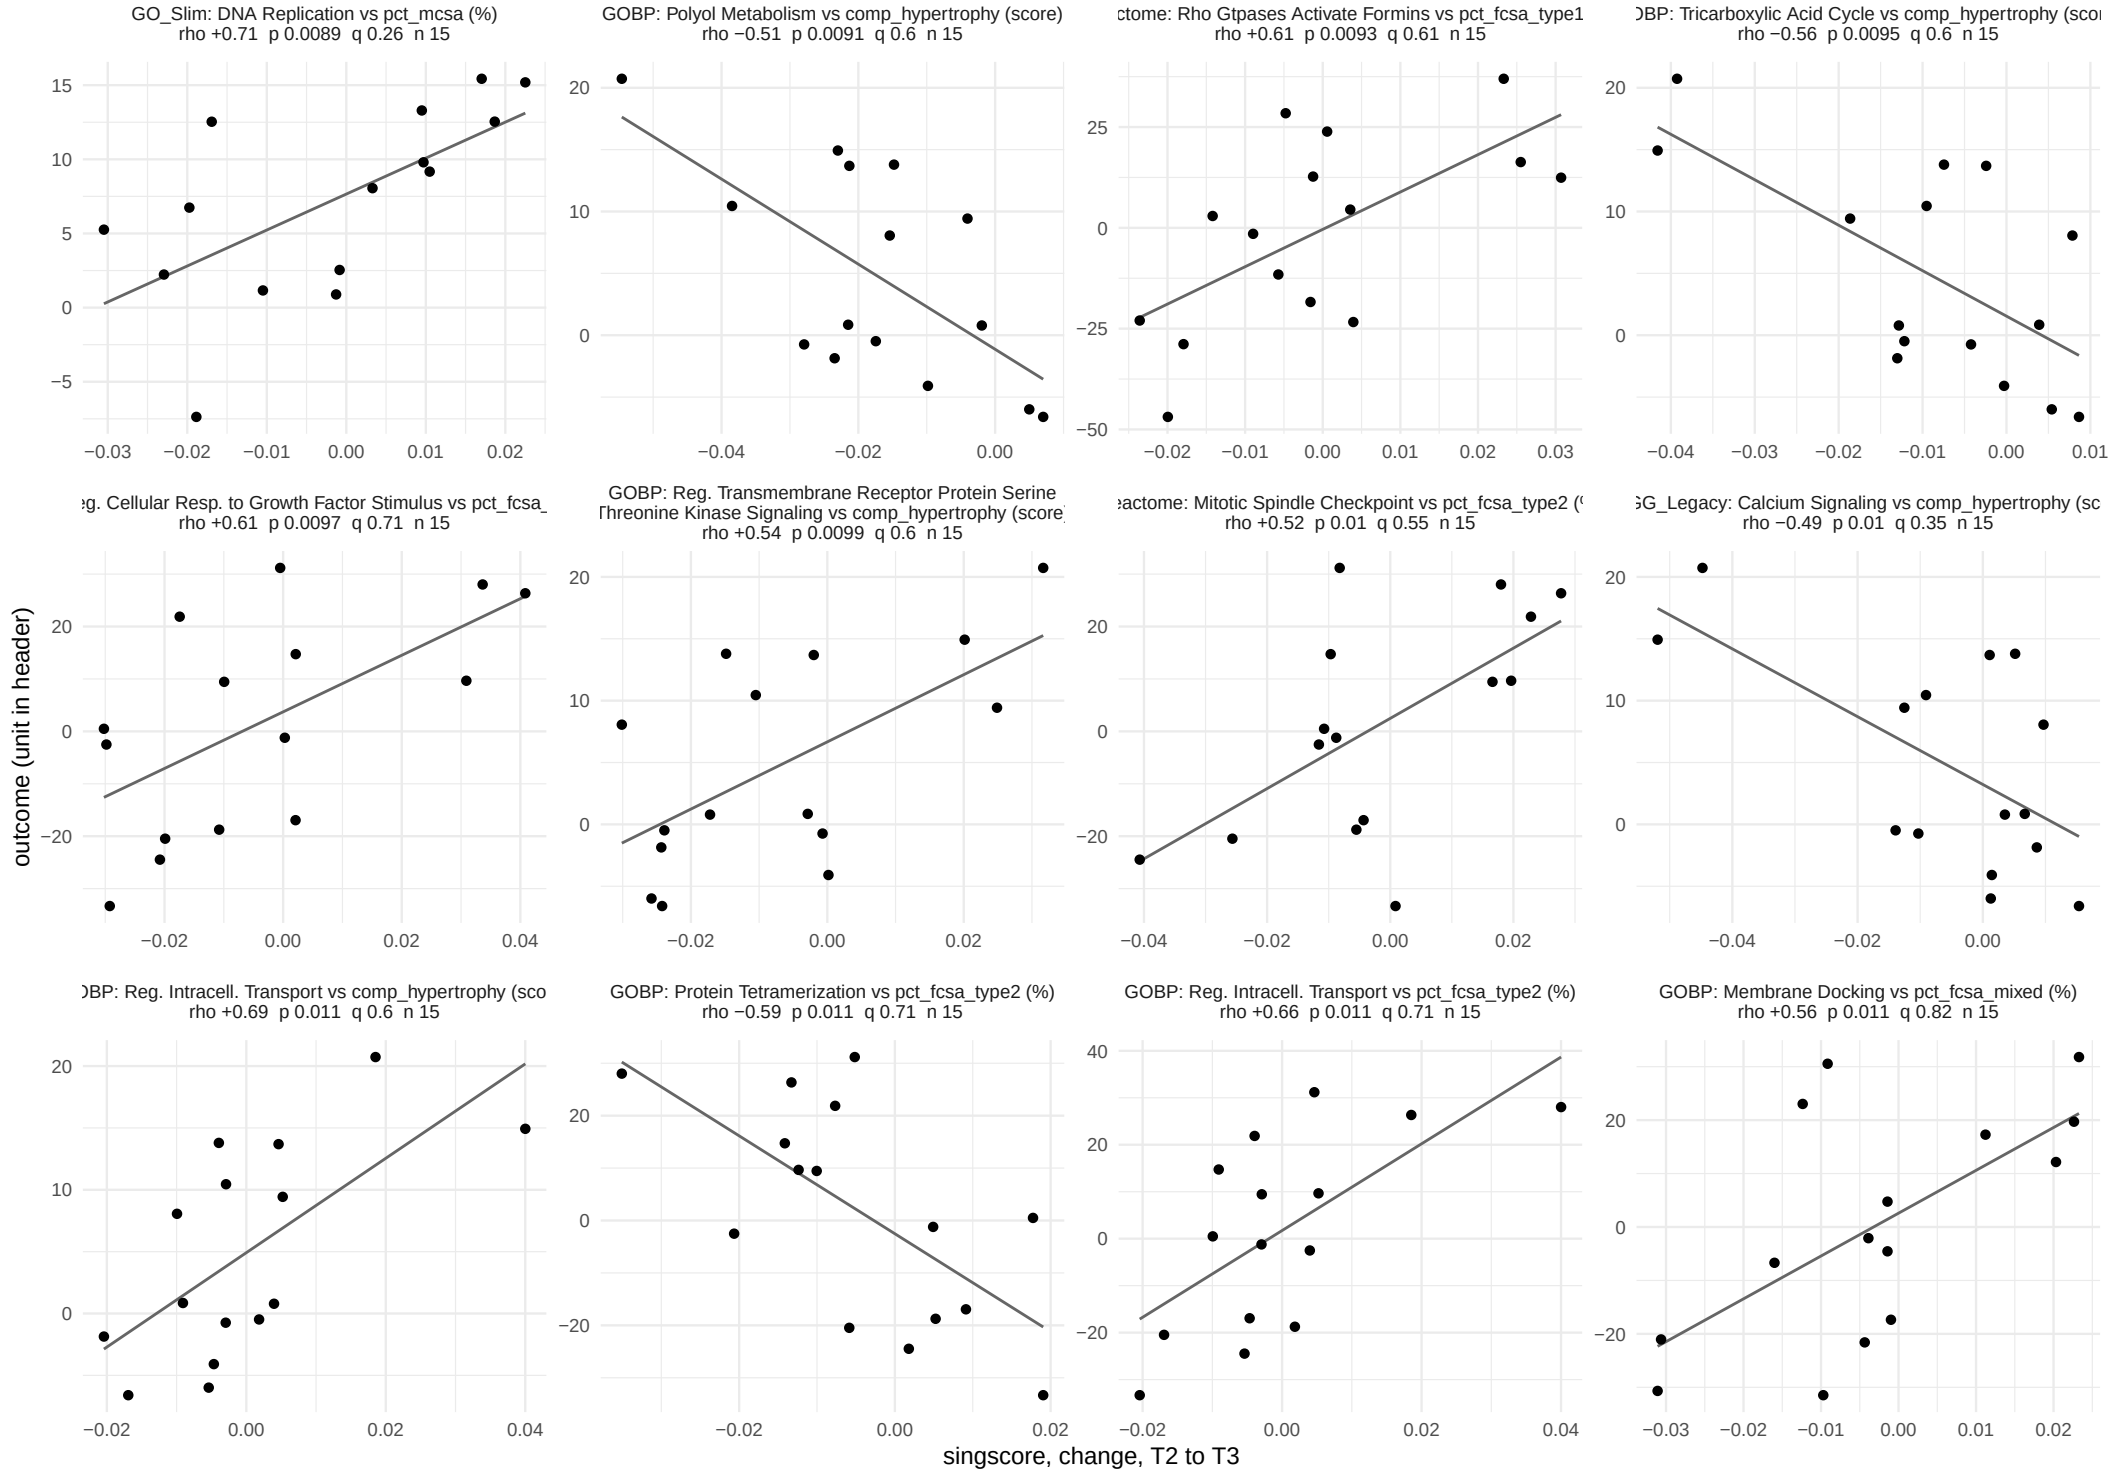

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, acute window


407 of 11024 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 7 of 34.

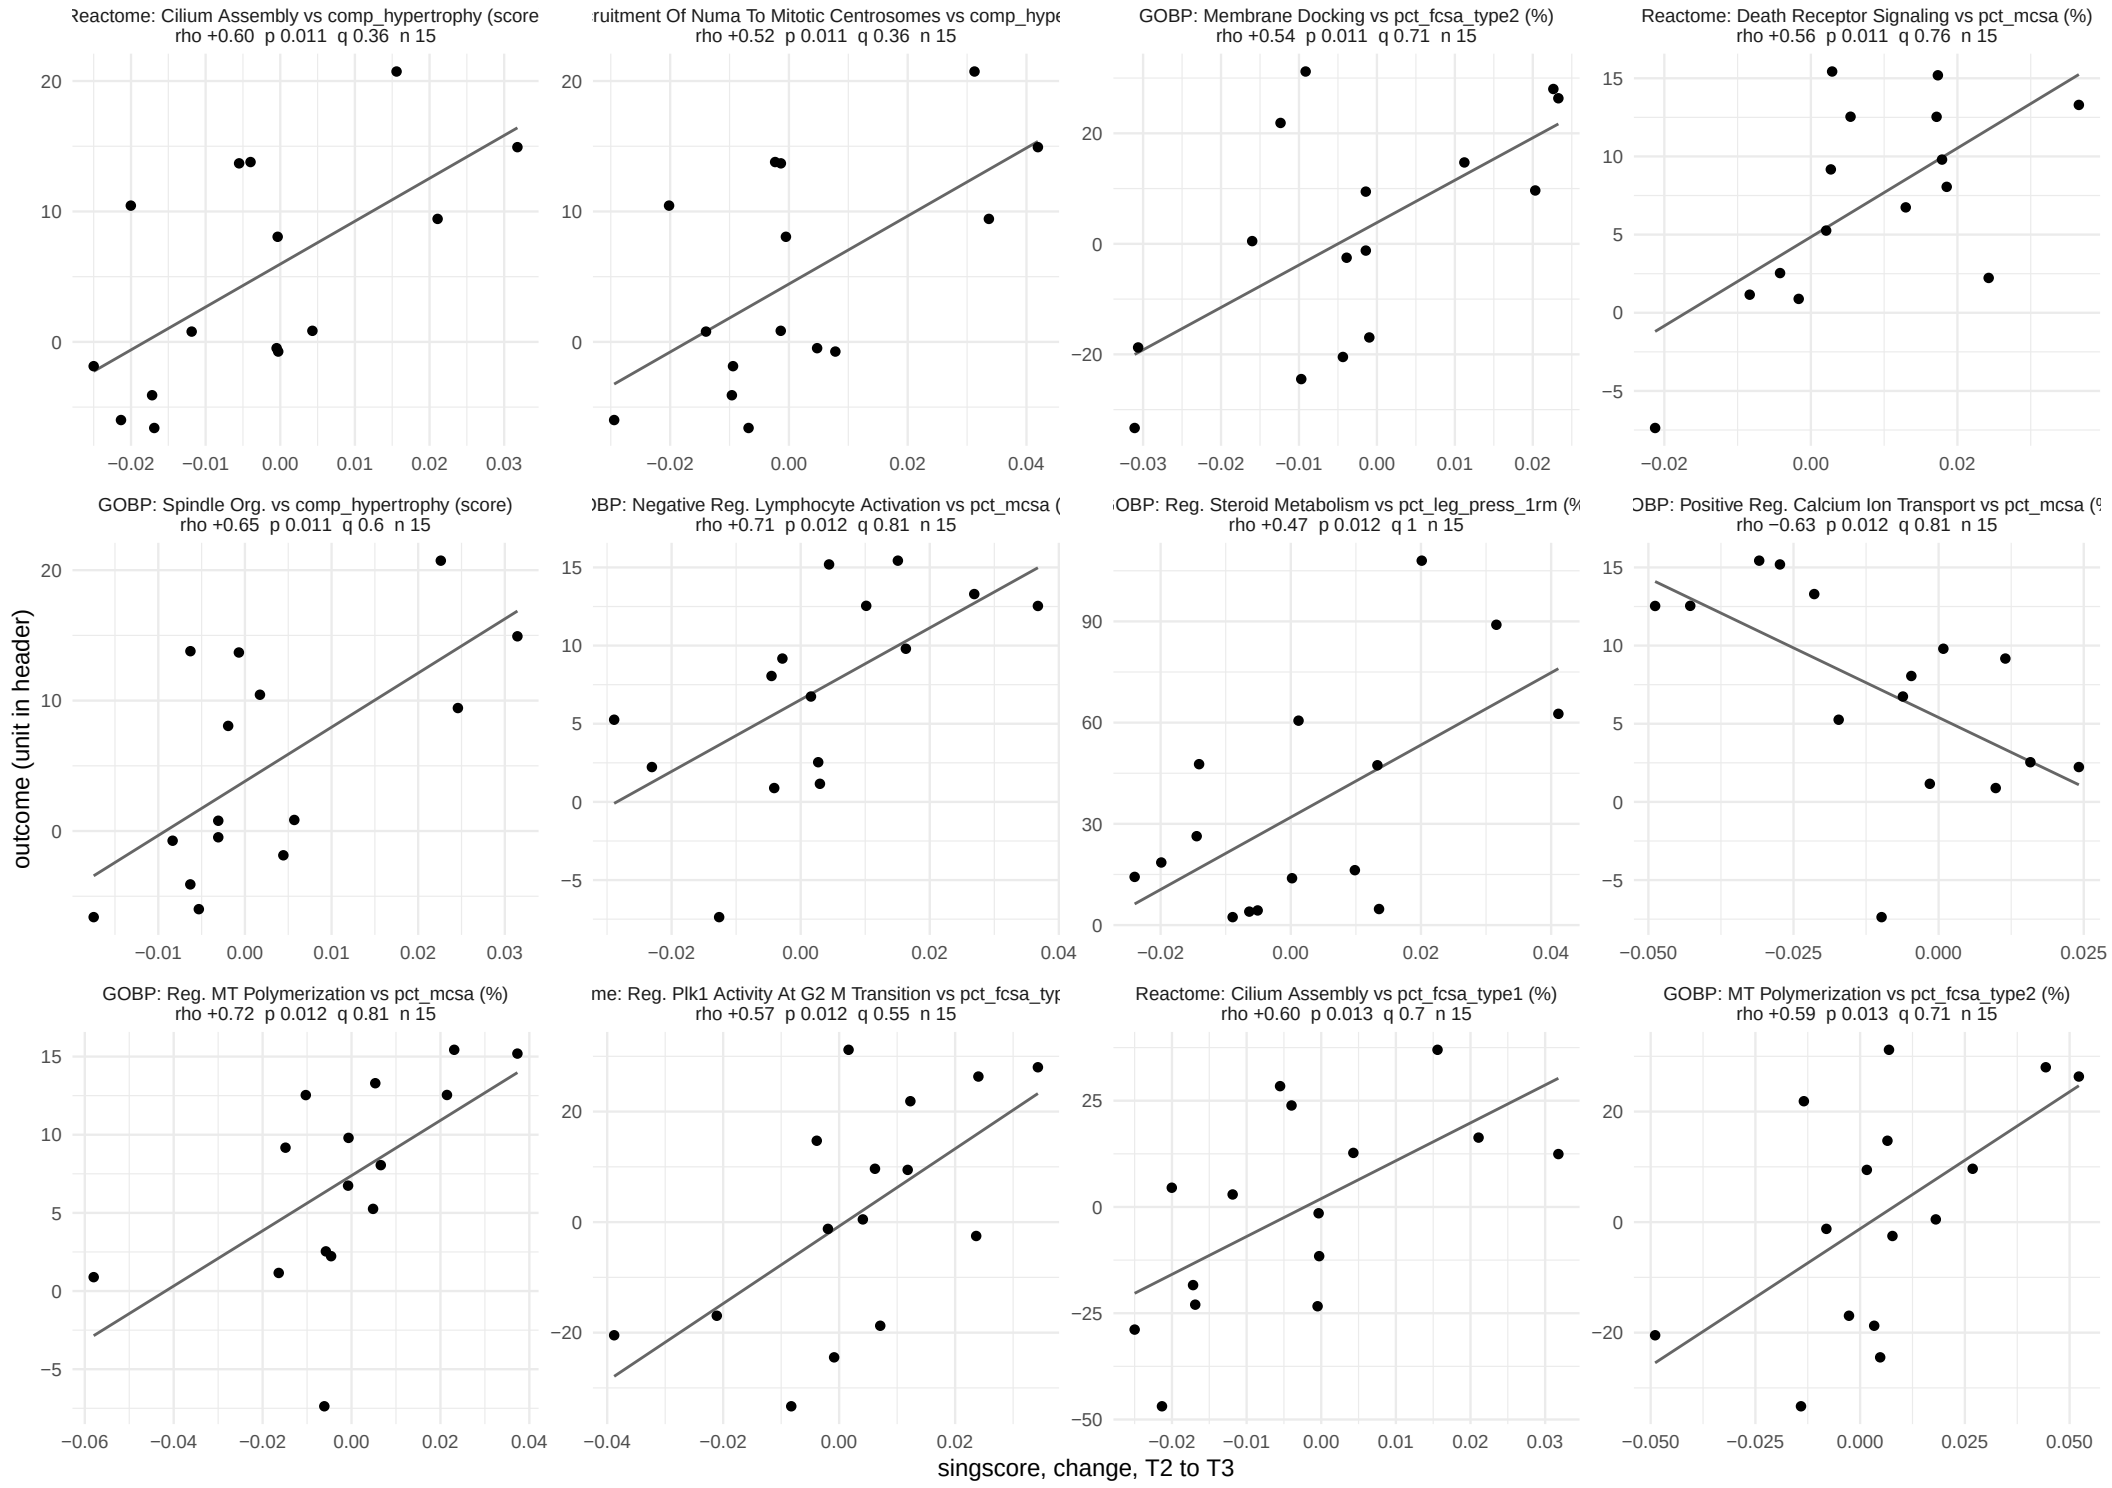

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, acute window


407 of 11024 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 8 of 34.

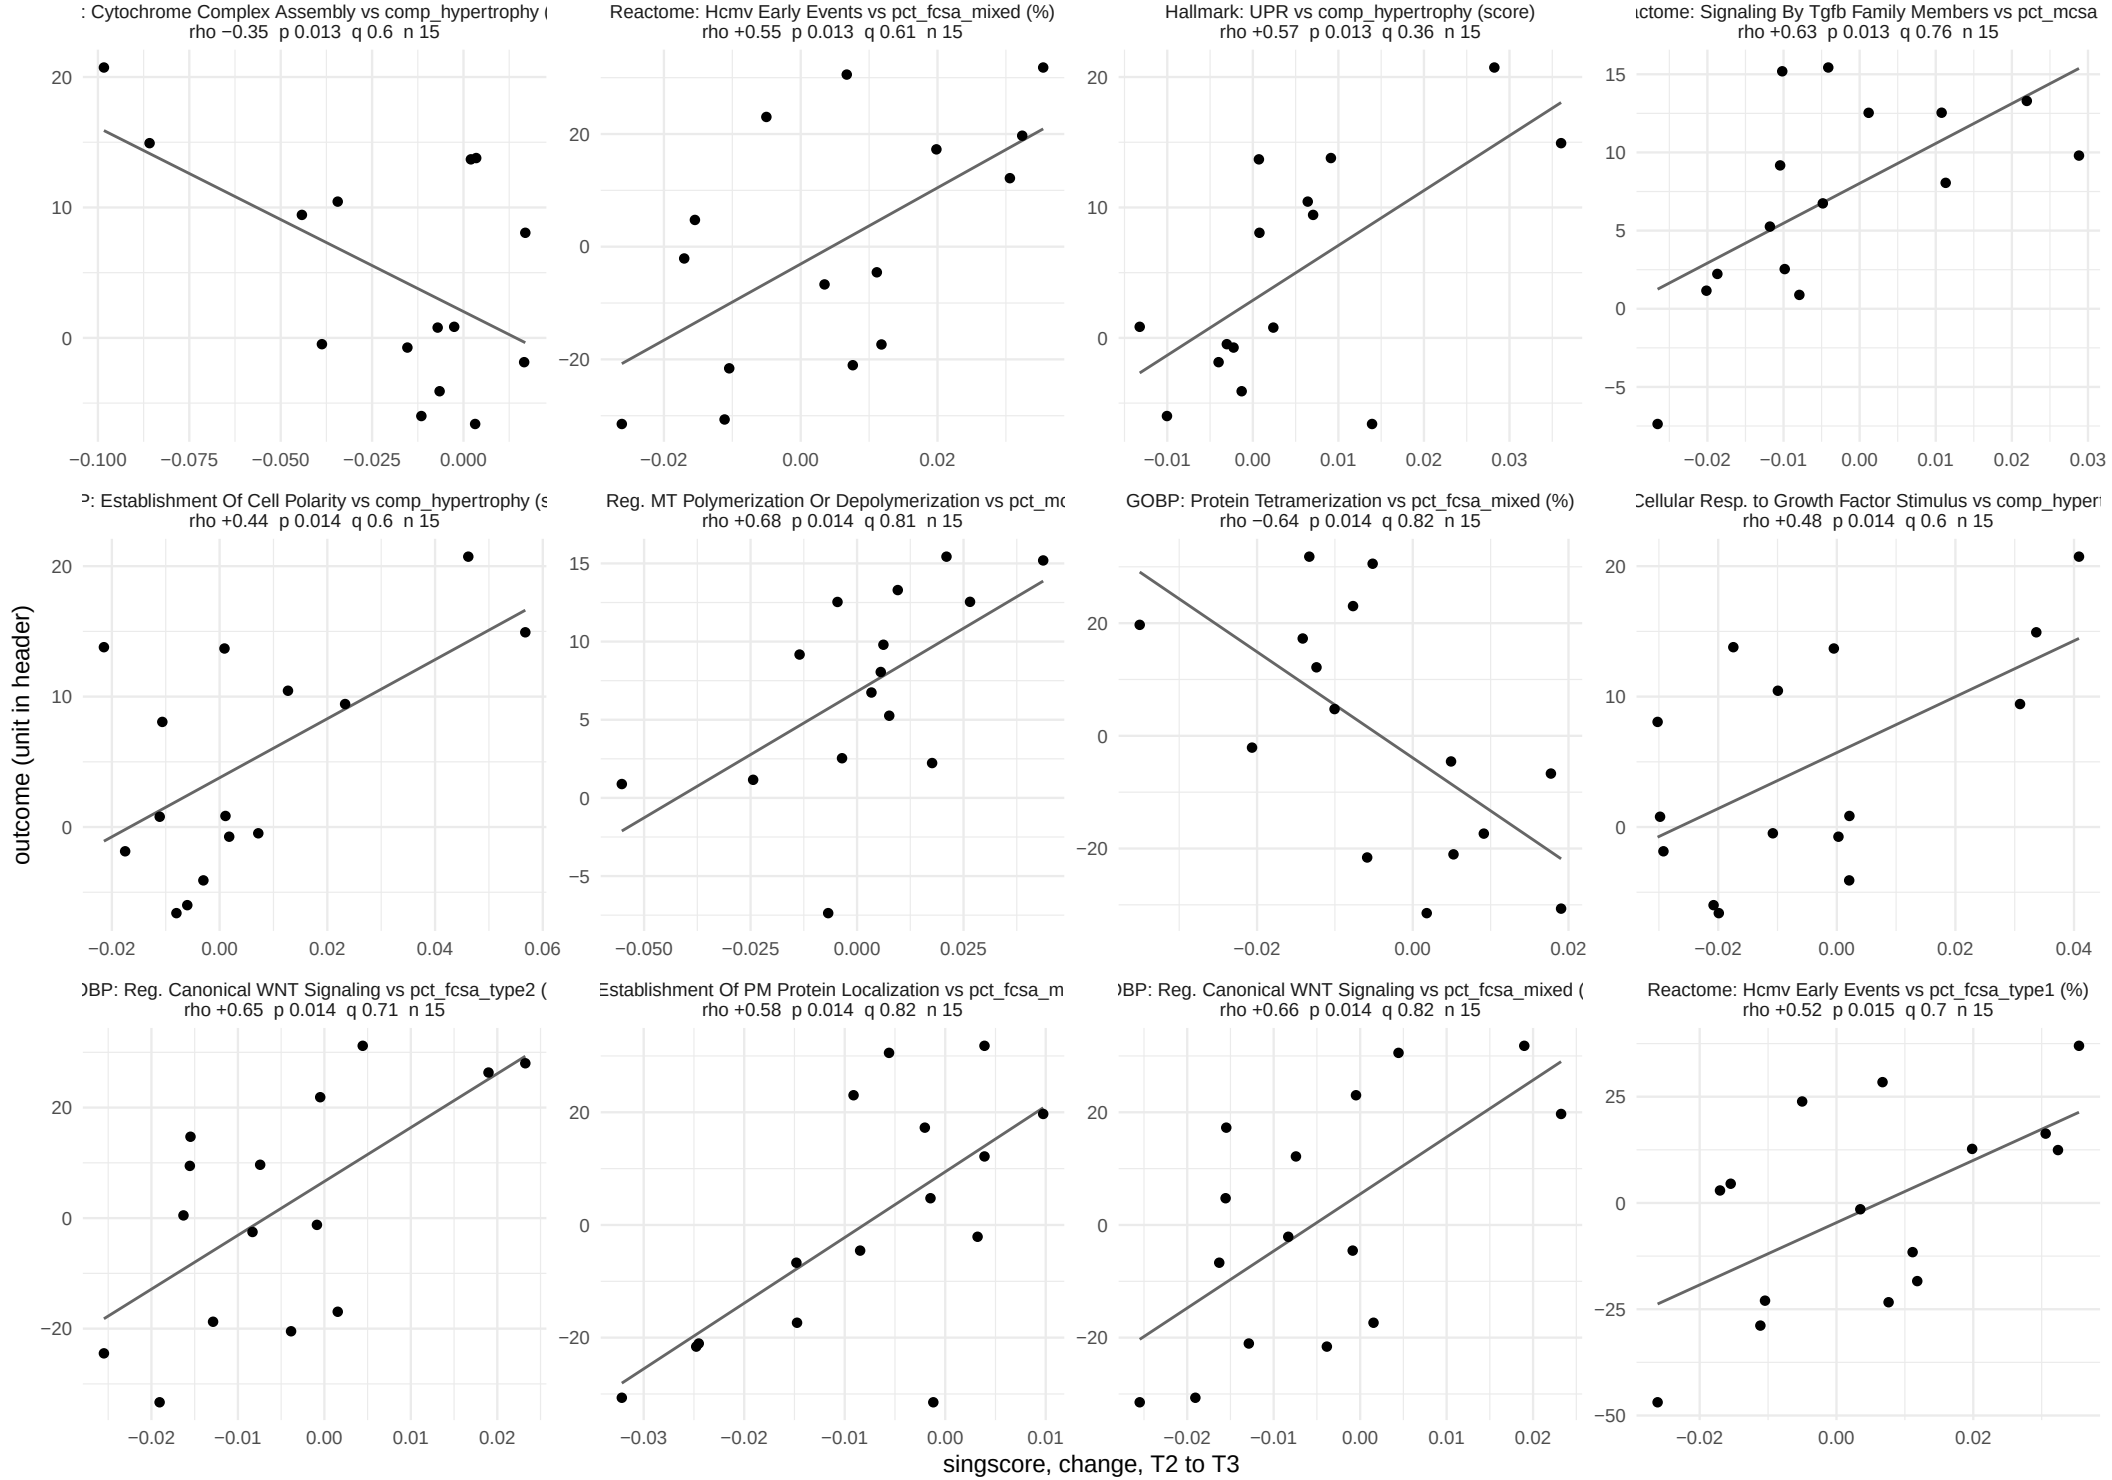

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, acute window


407 of 11024 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 9 of 34.

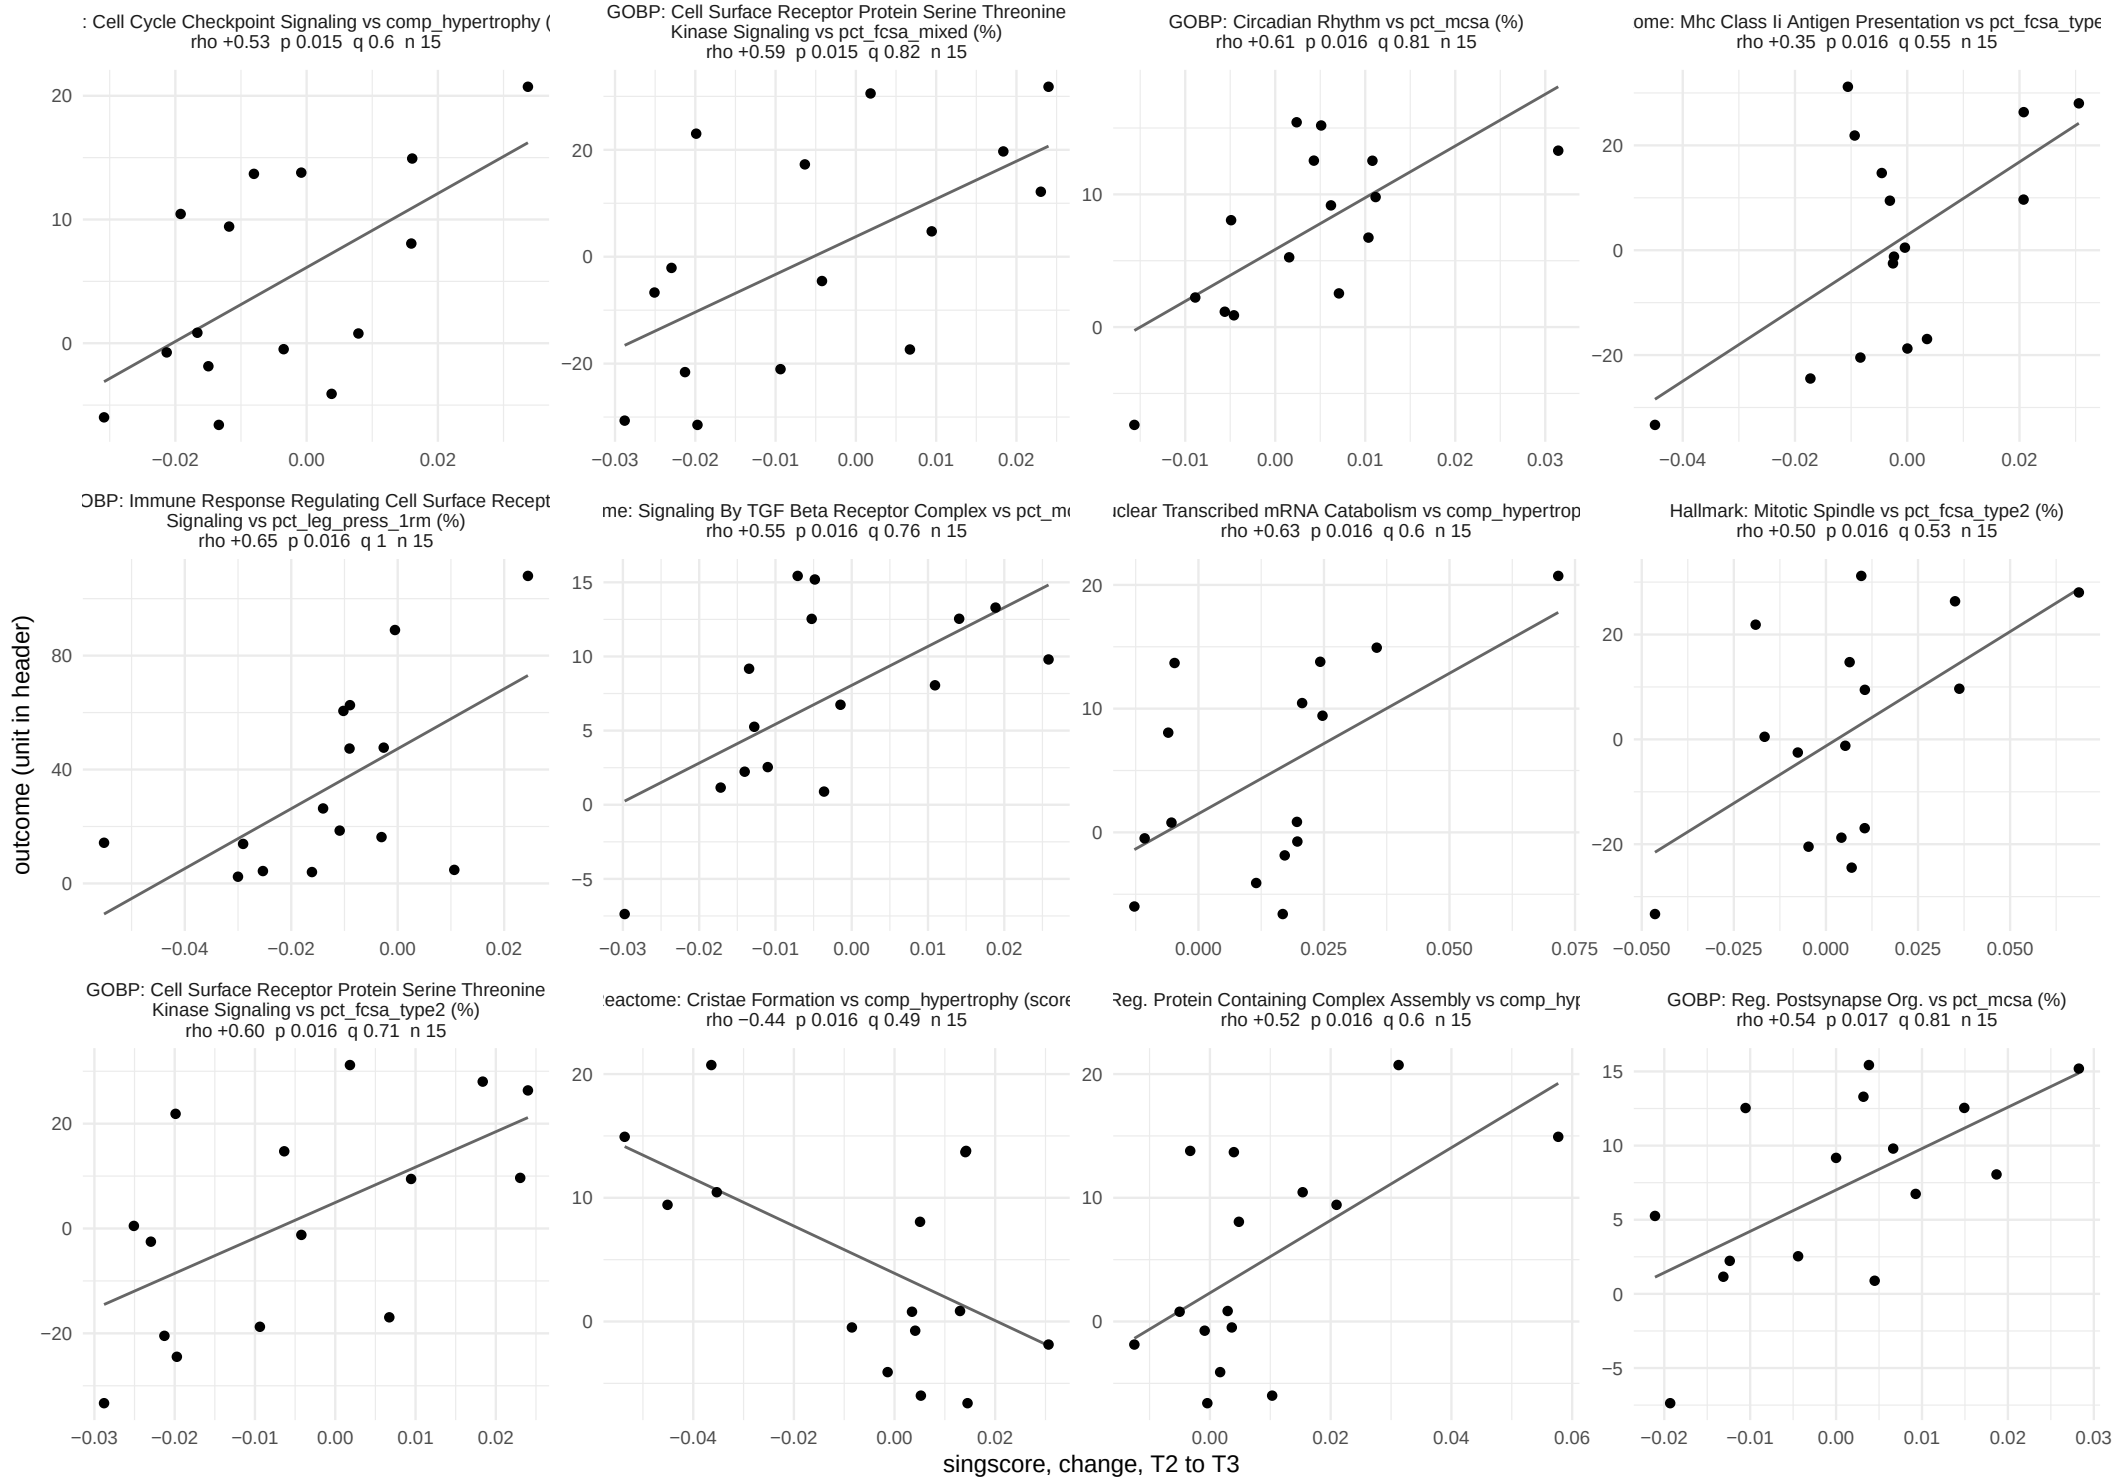

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, acute window


407 of 11024 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 10 of 34.

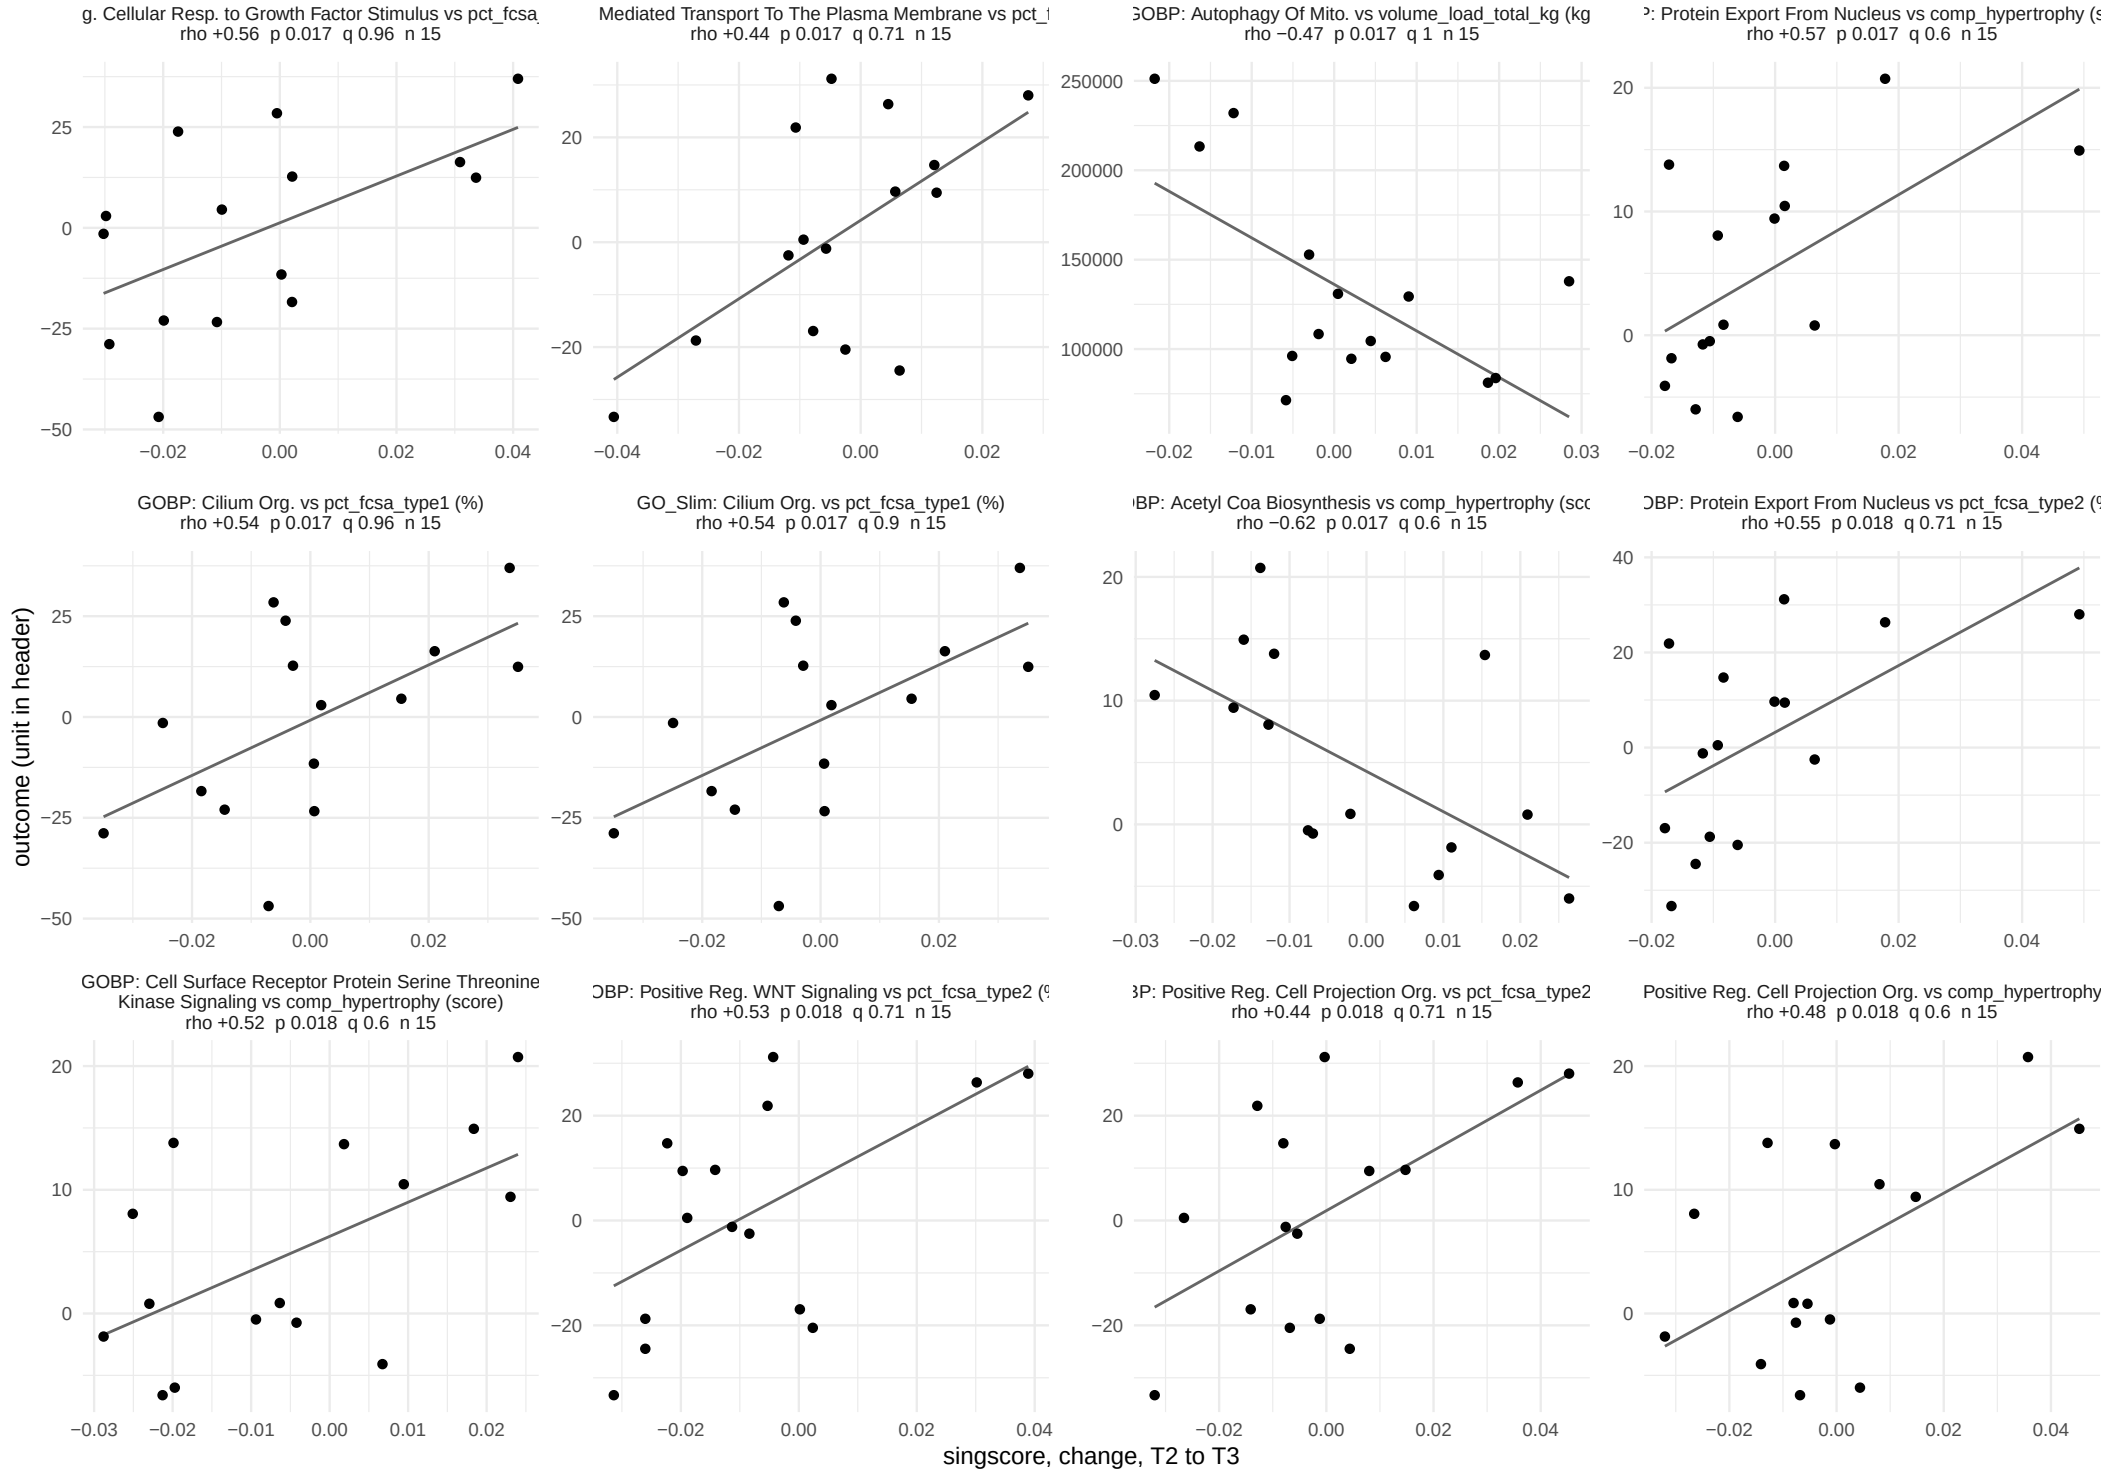

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, acute window


407 of 11024 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 11 of 34.

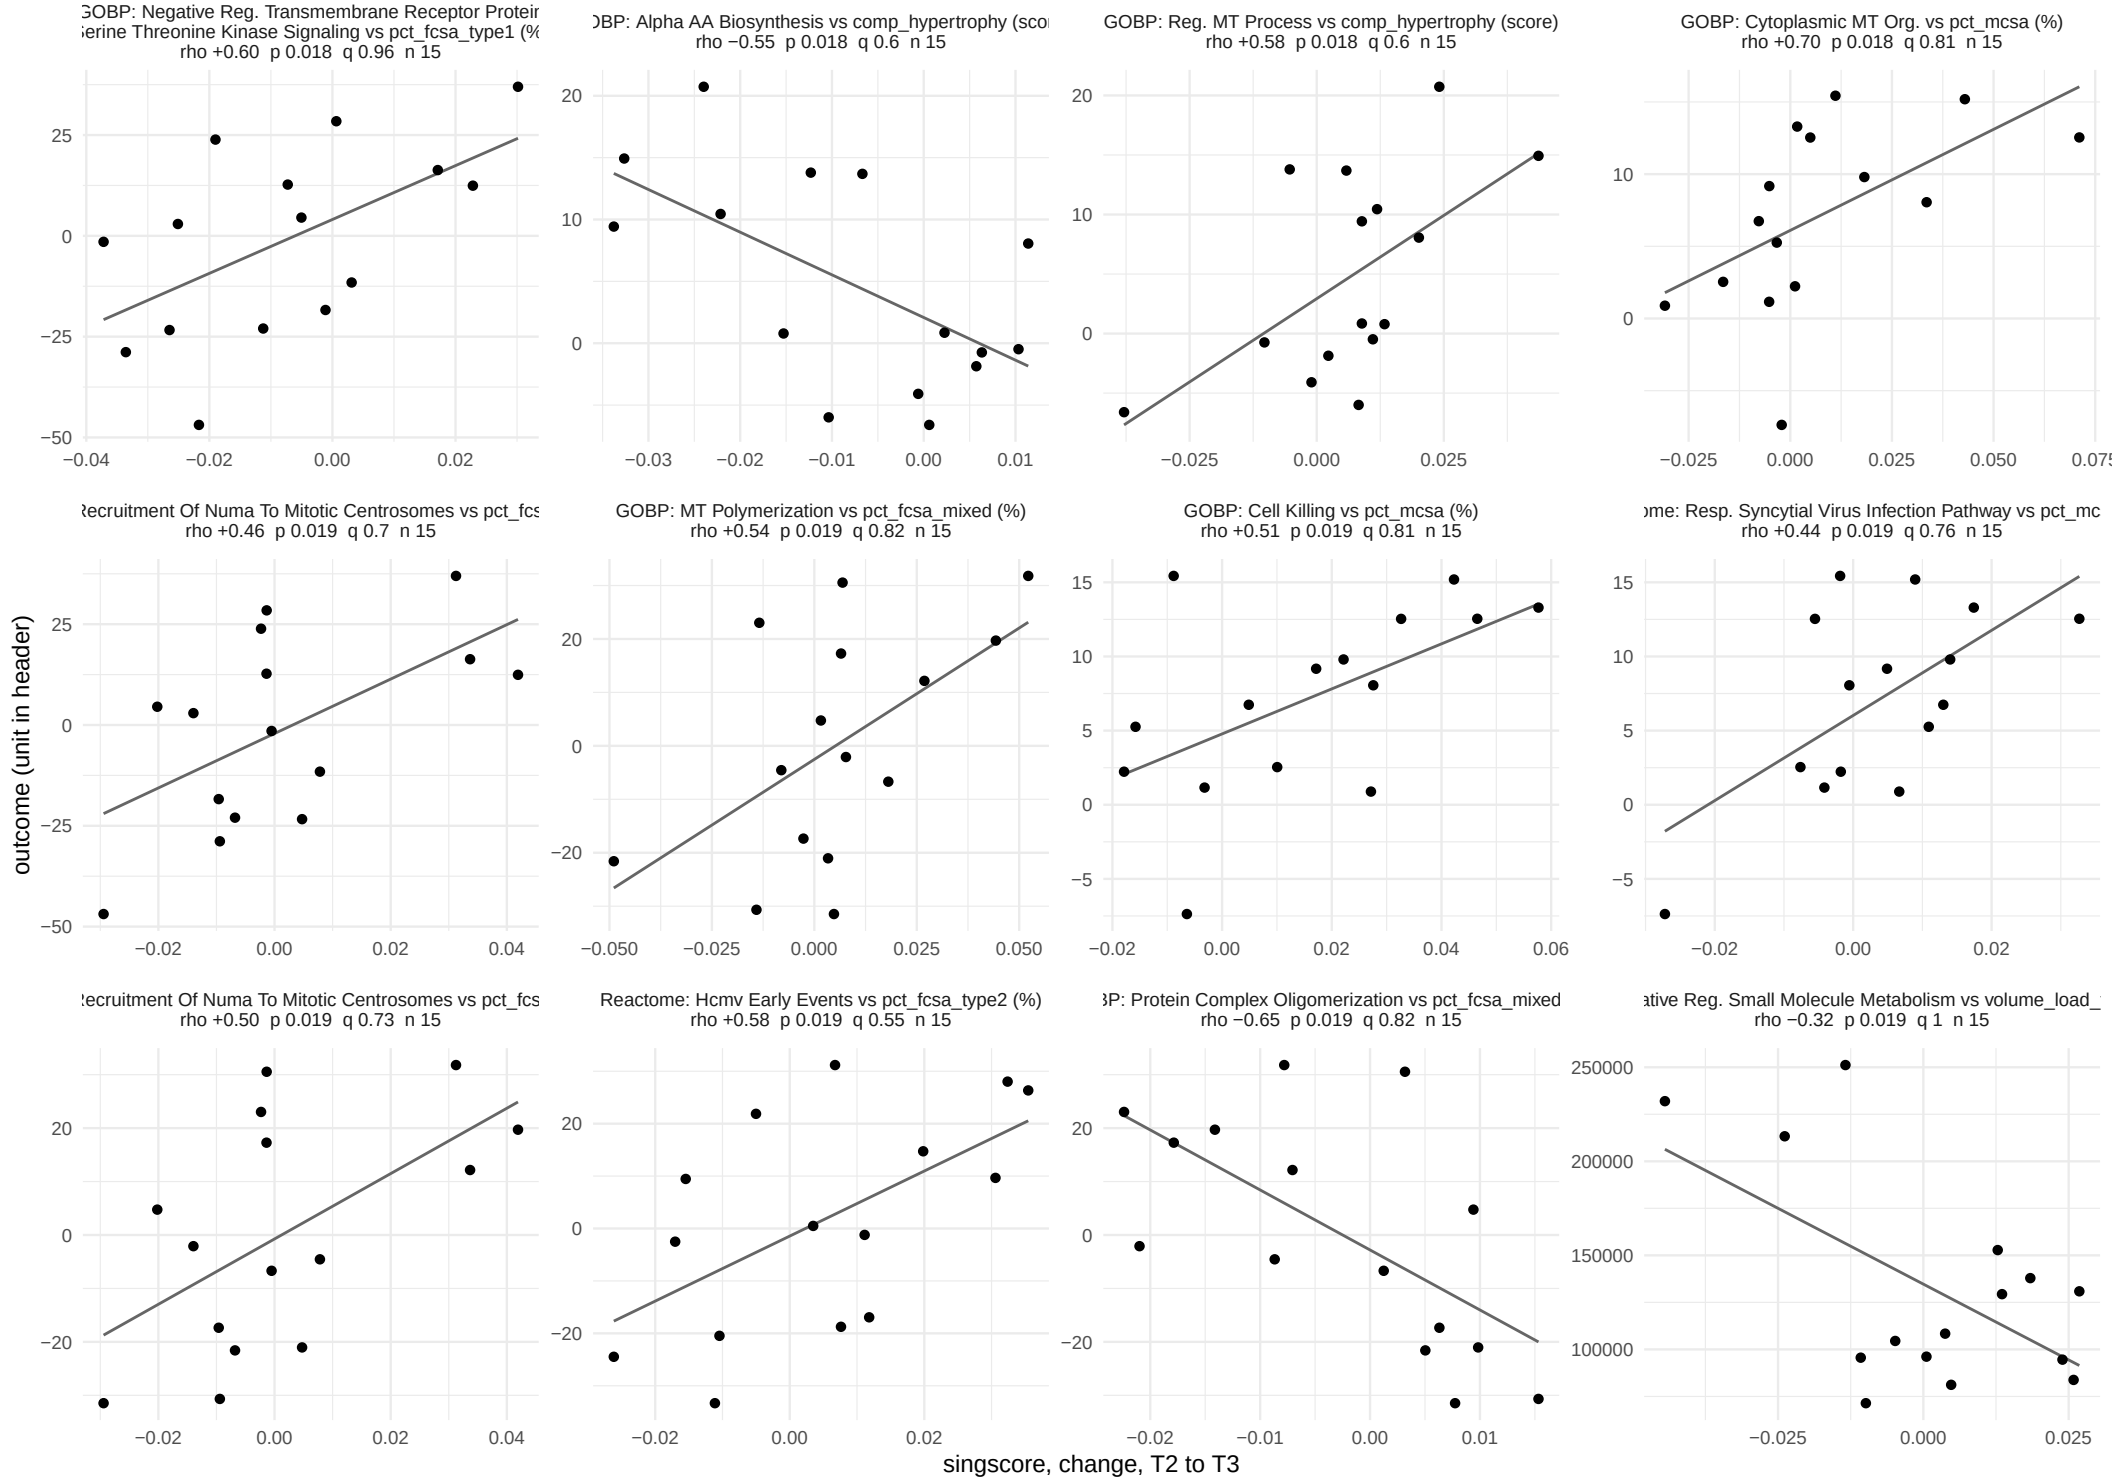

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, acute window


407 of 11024 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 12 of 34.

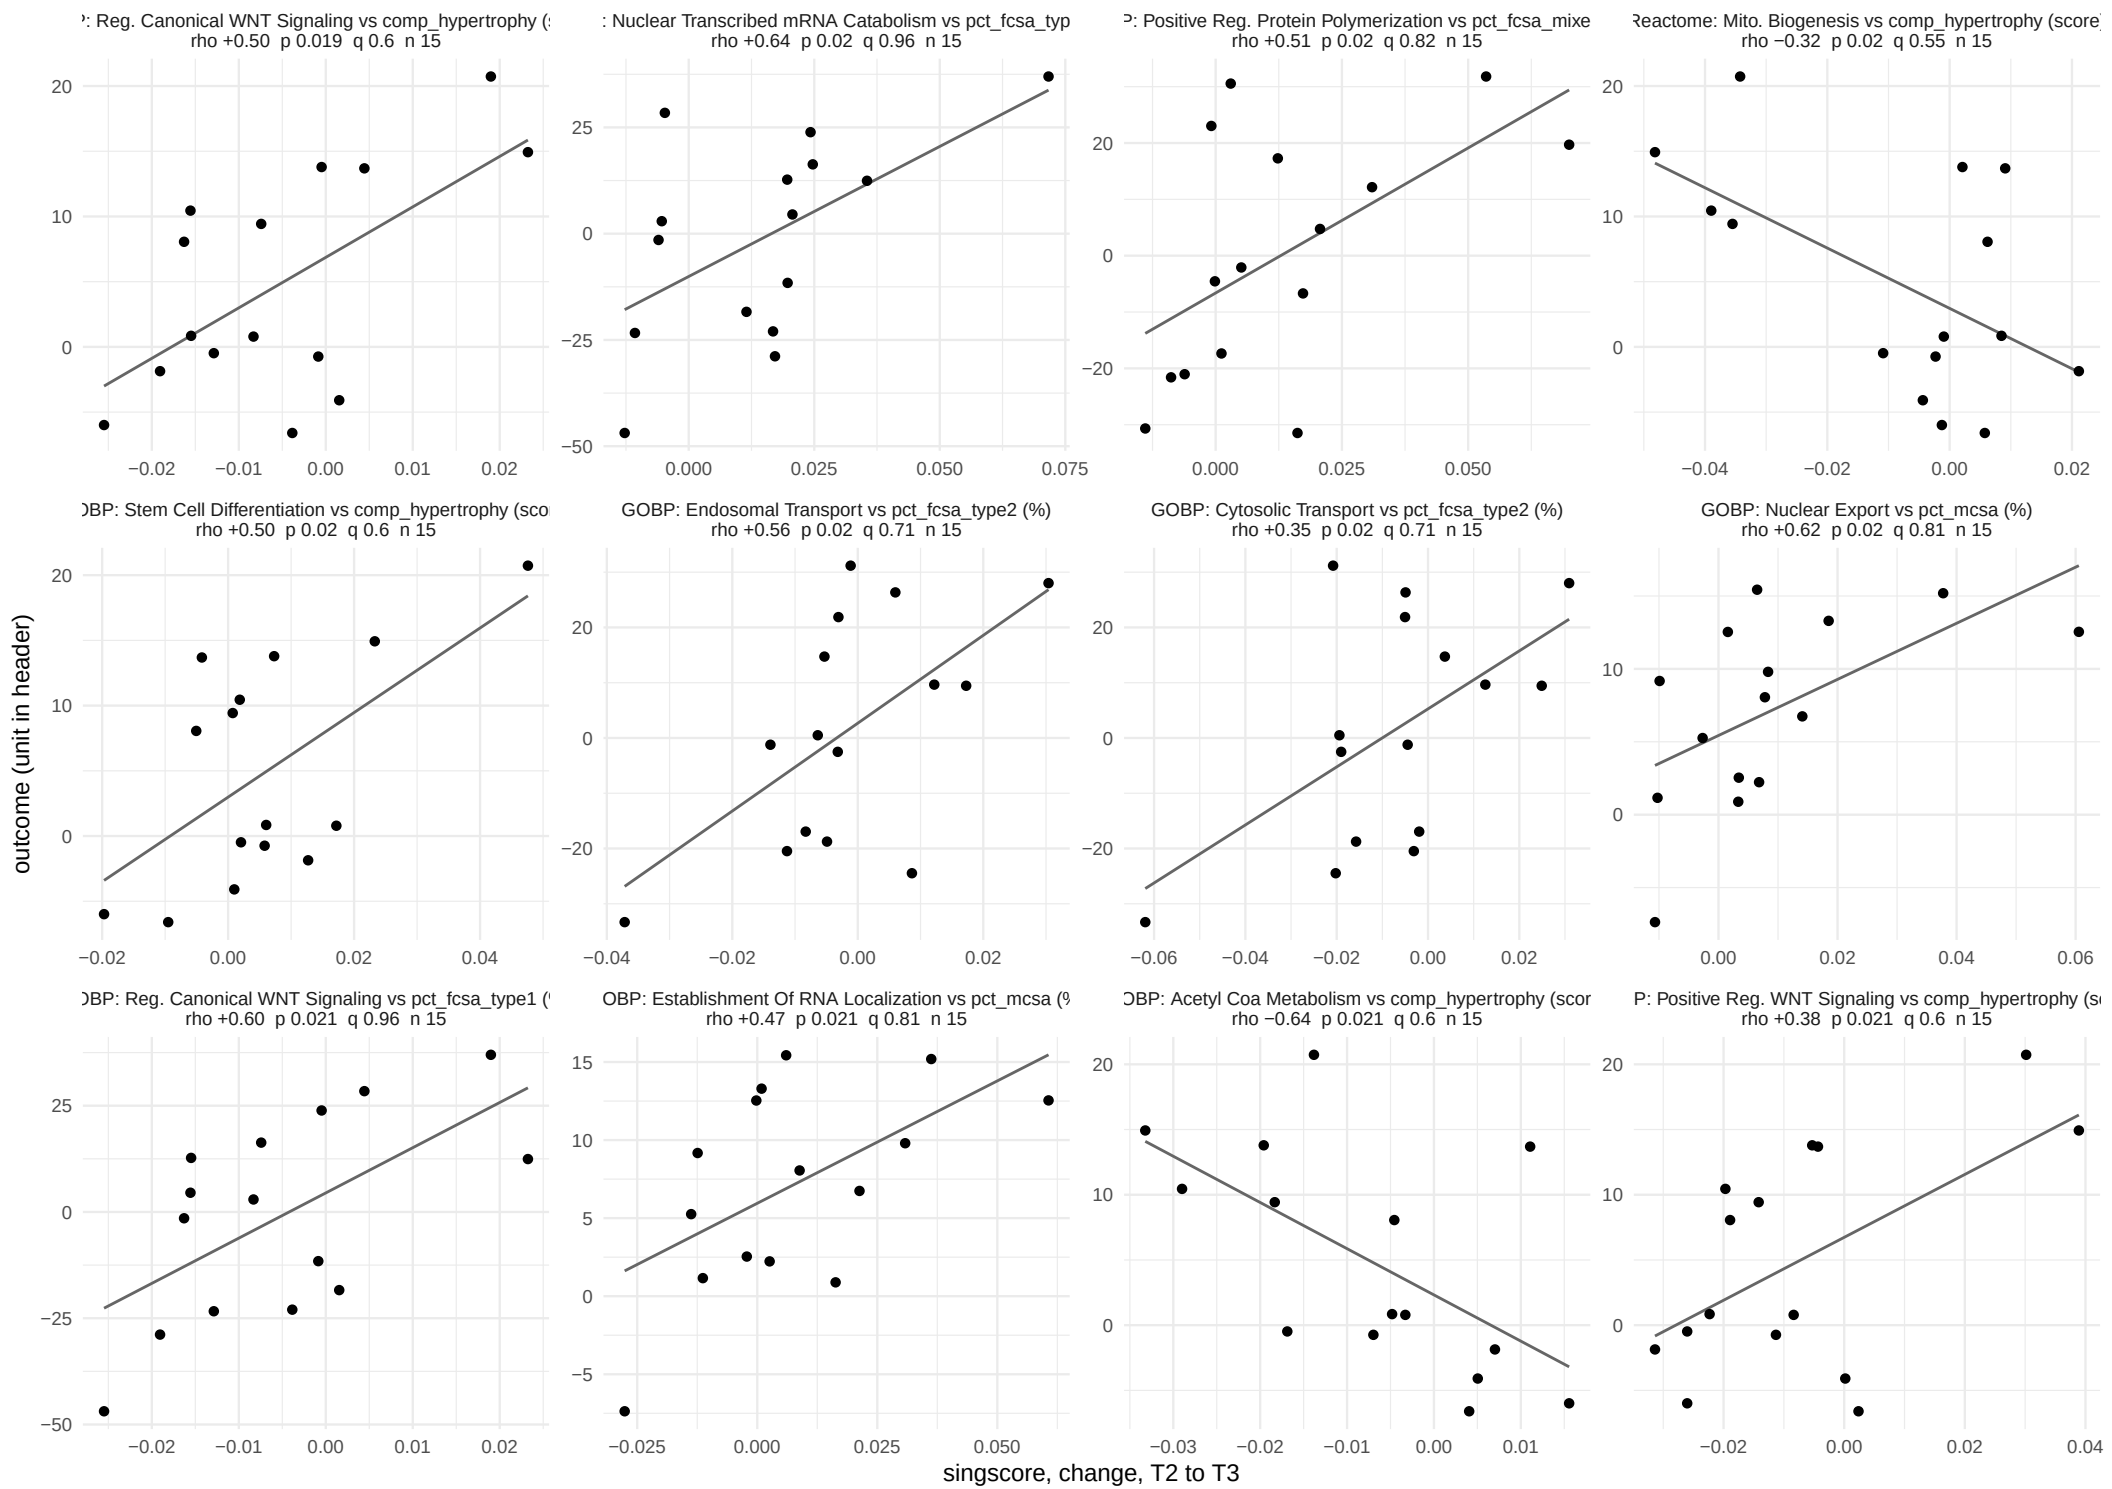

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, acute window


407 of 11024 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 13 of 34.

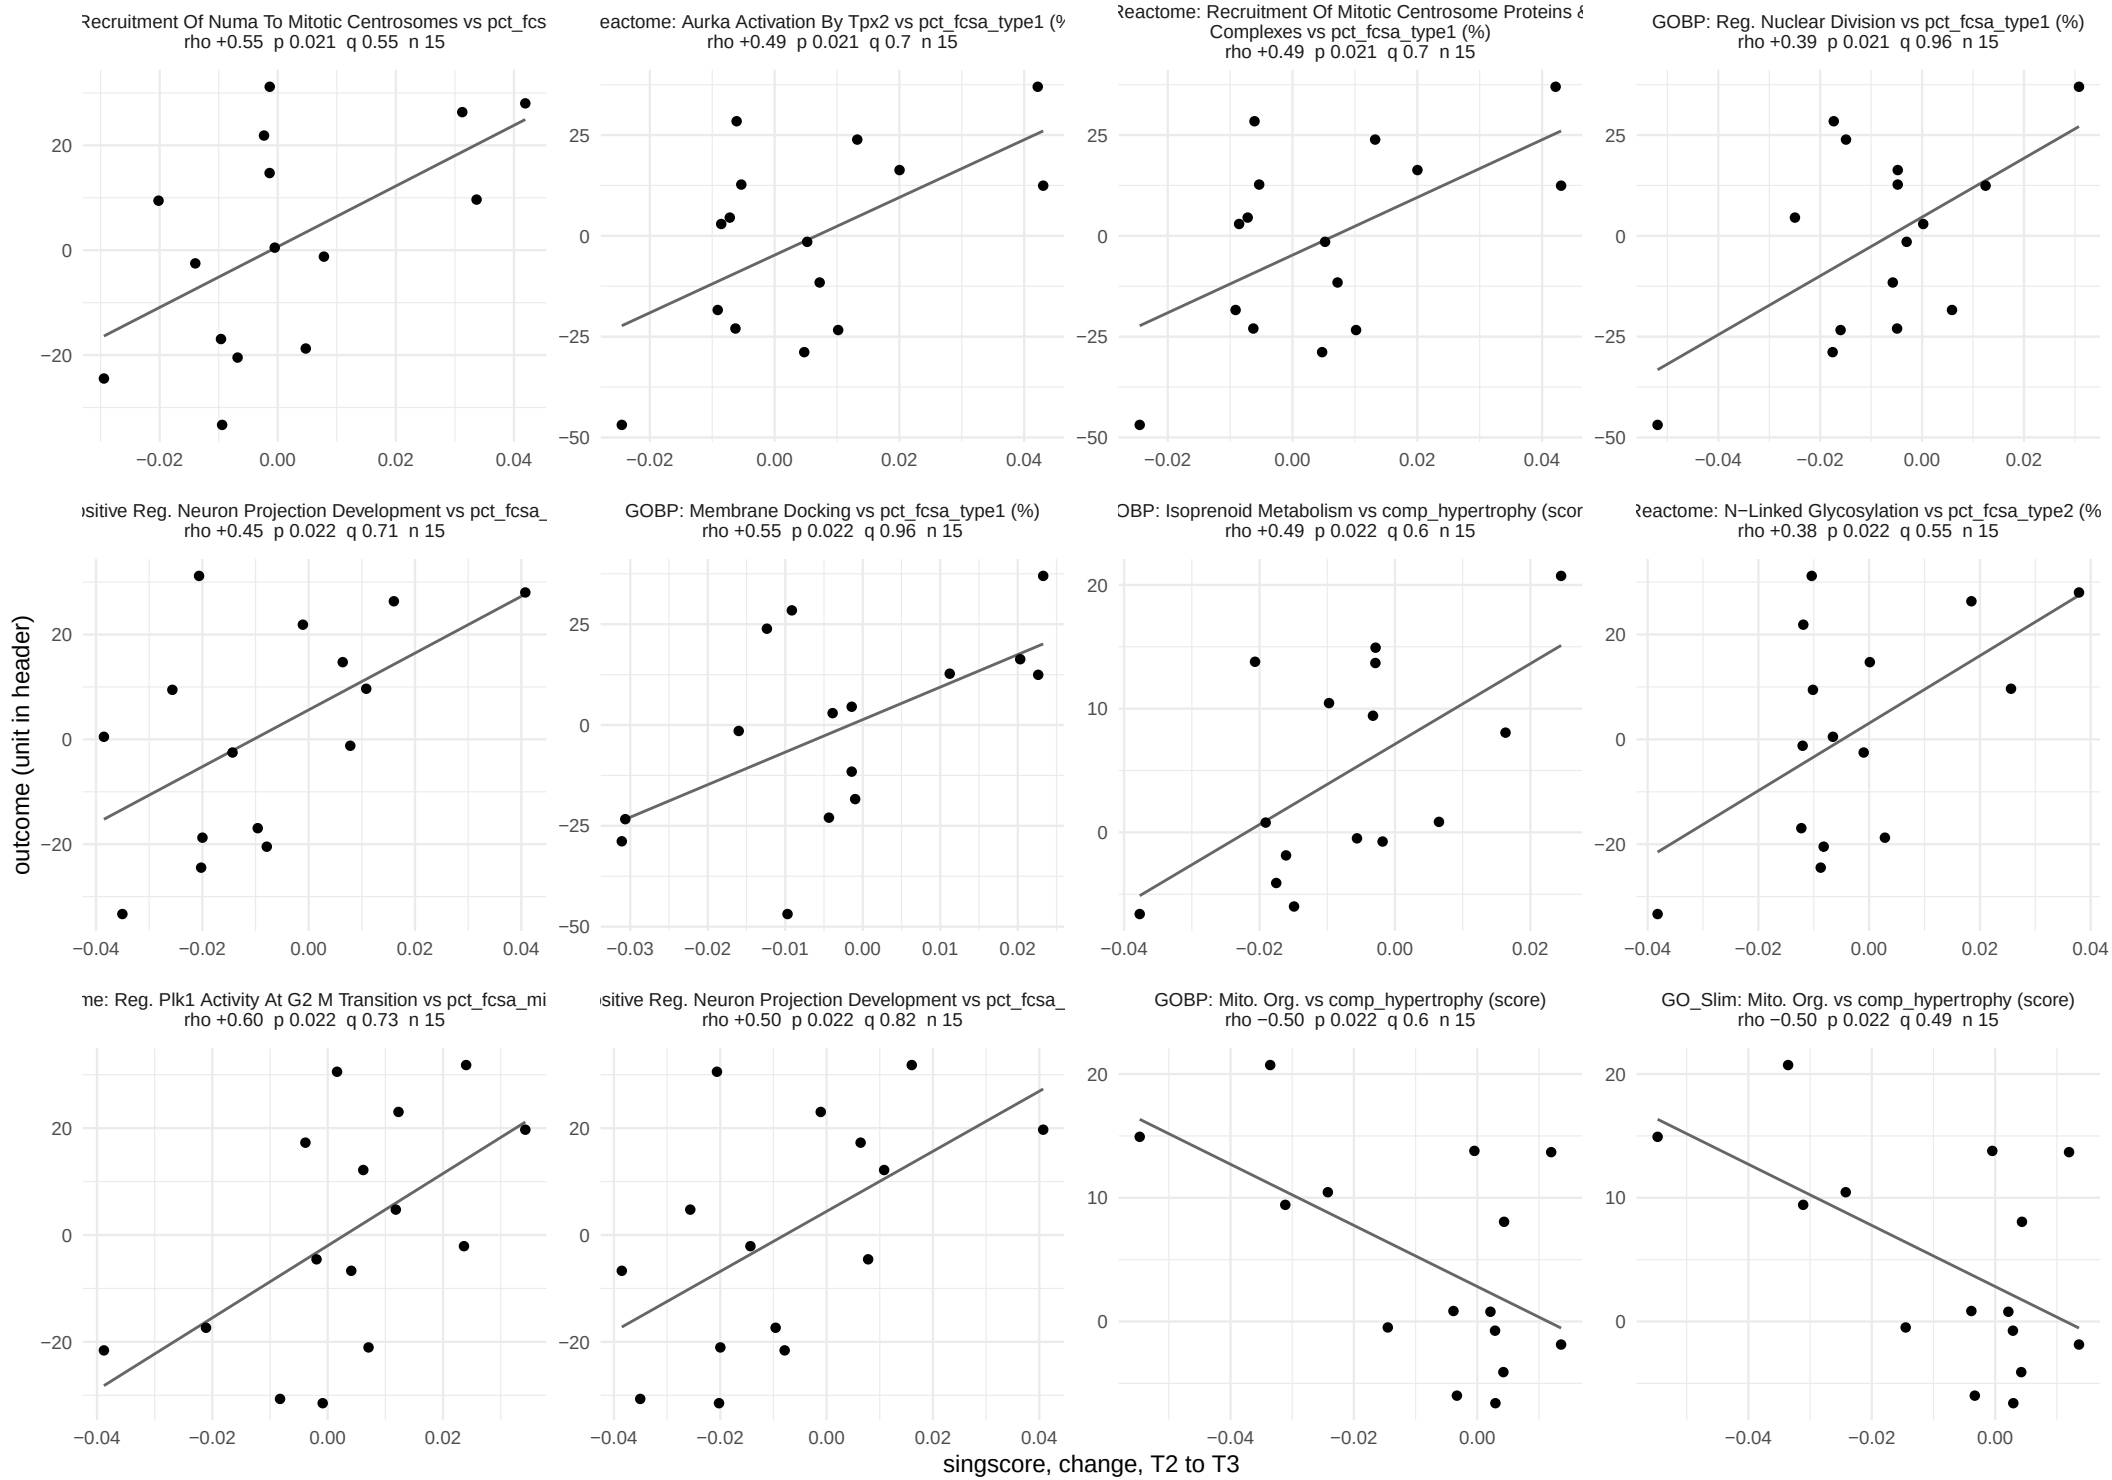

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, acute window


407 of 11024 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 14 of 34.

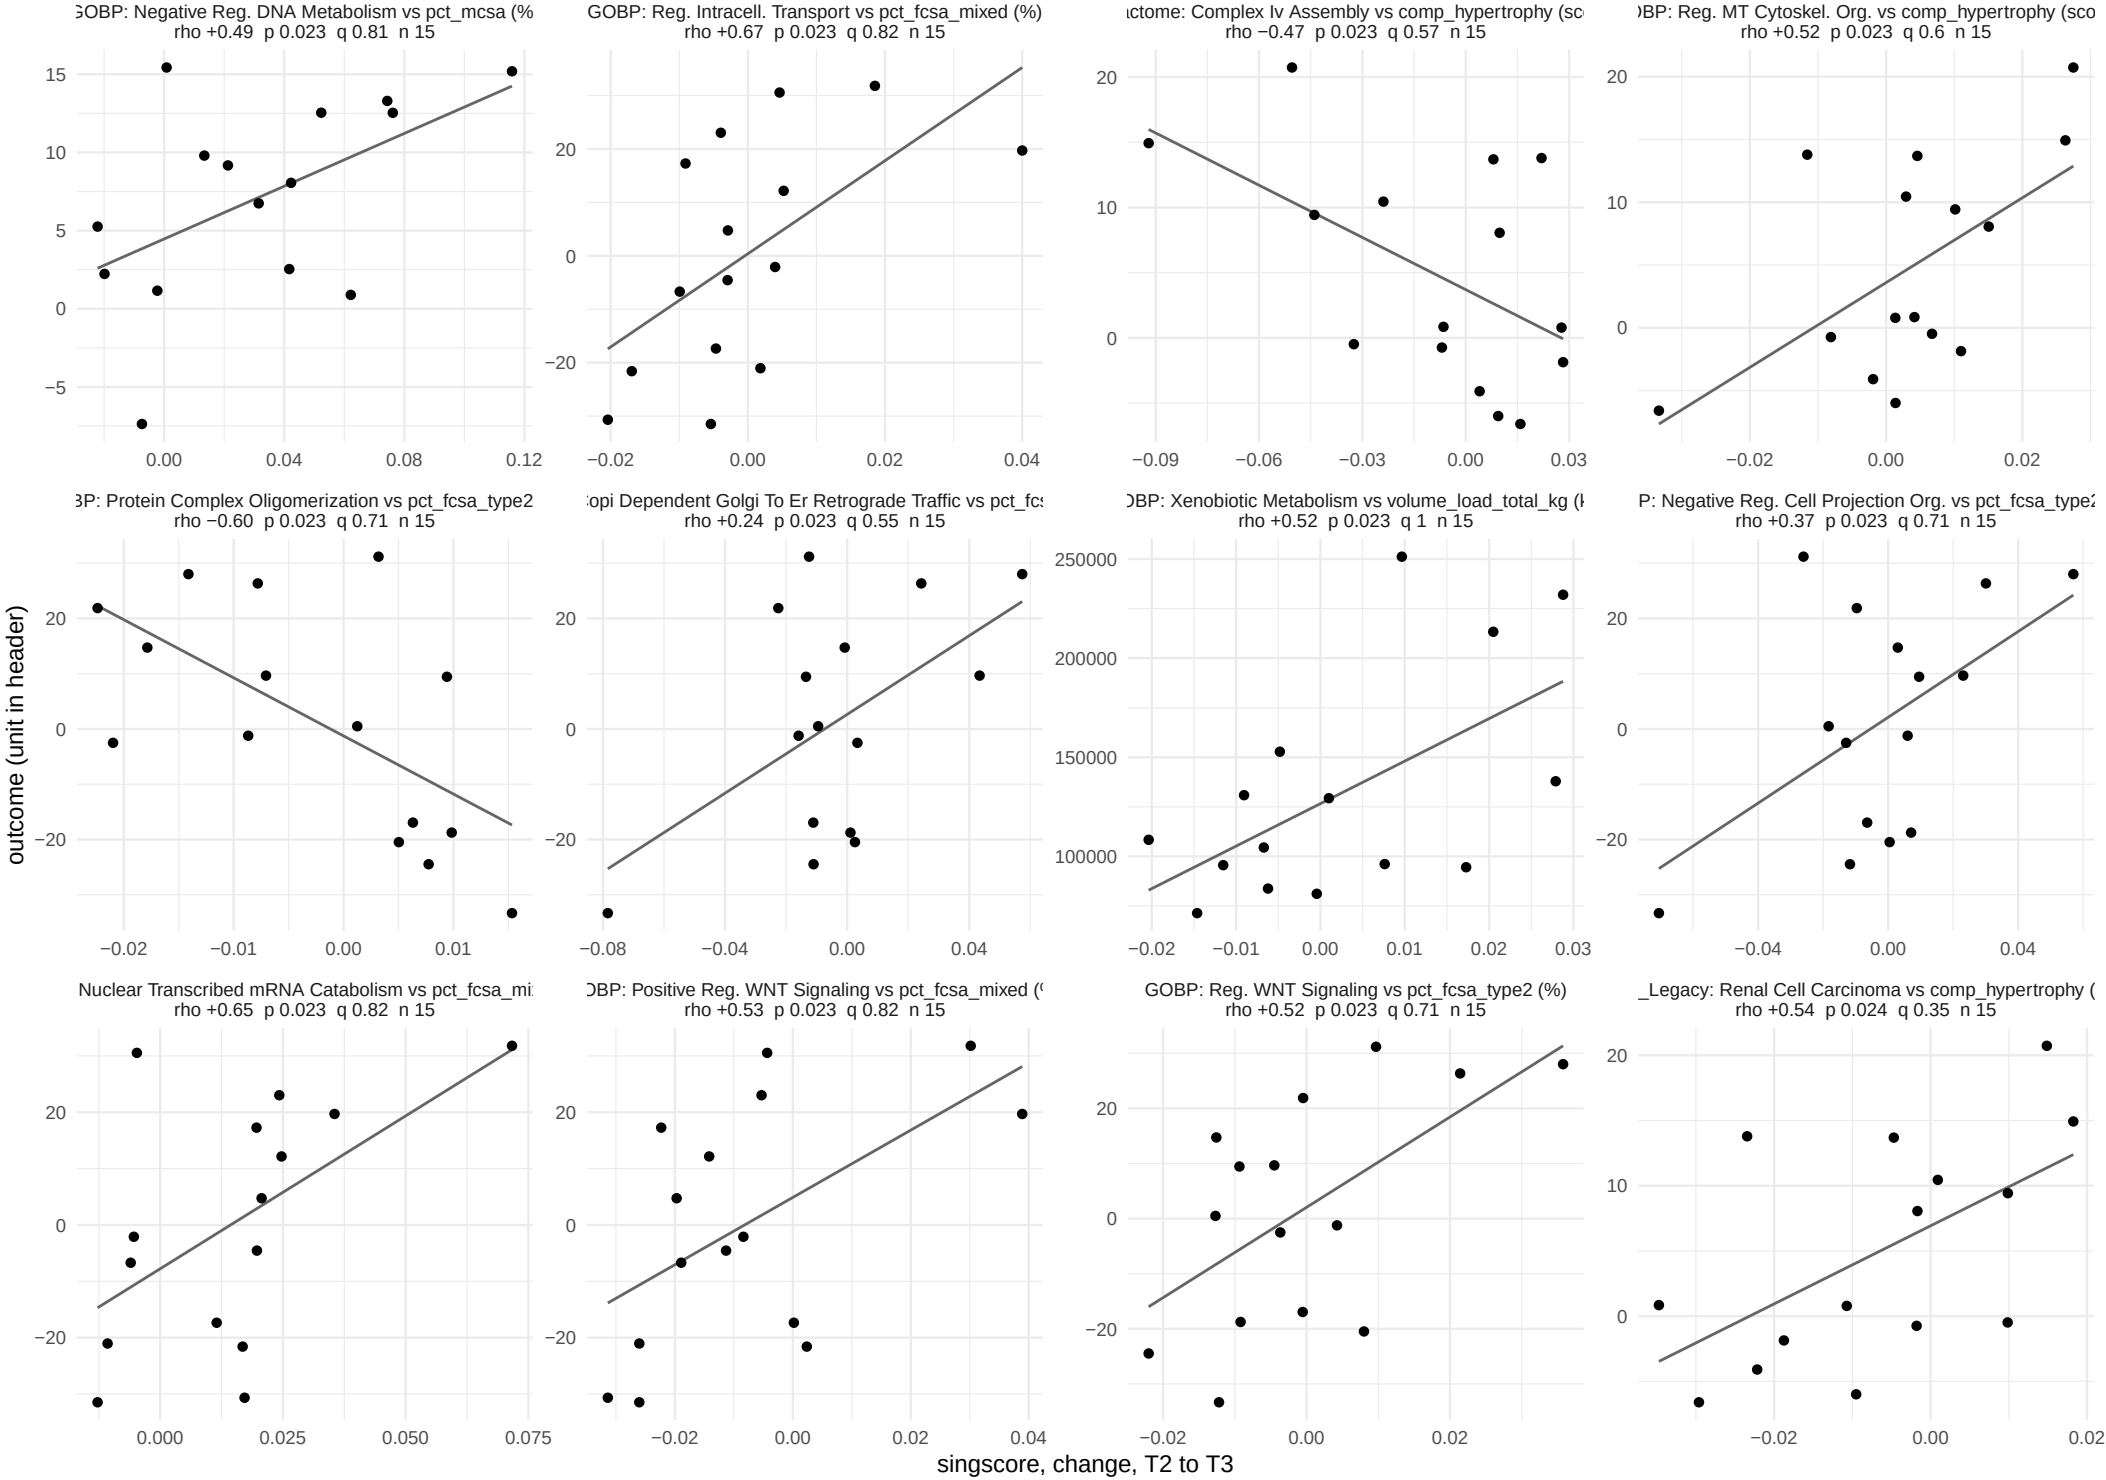

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, acute window


407 of 11024 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 15 of 34.

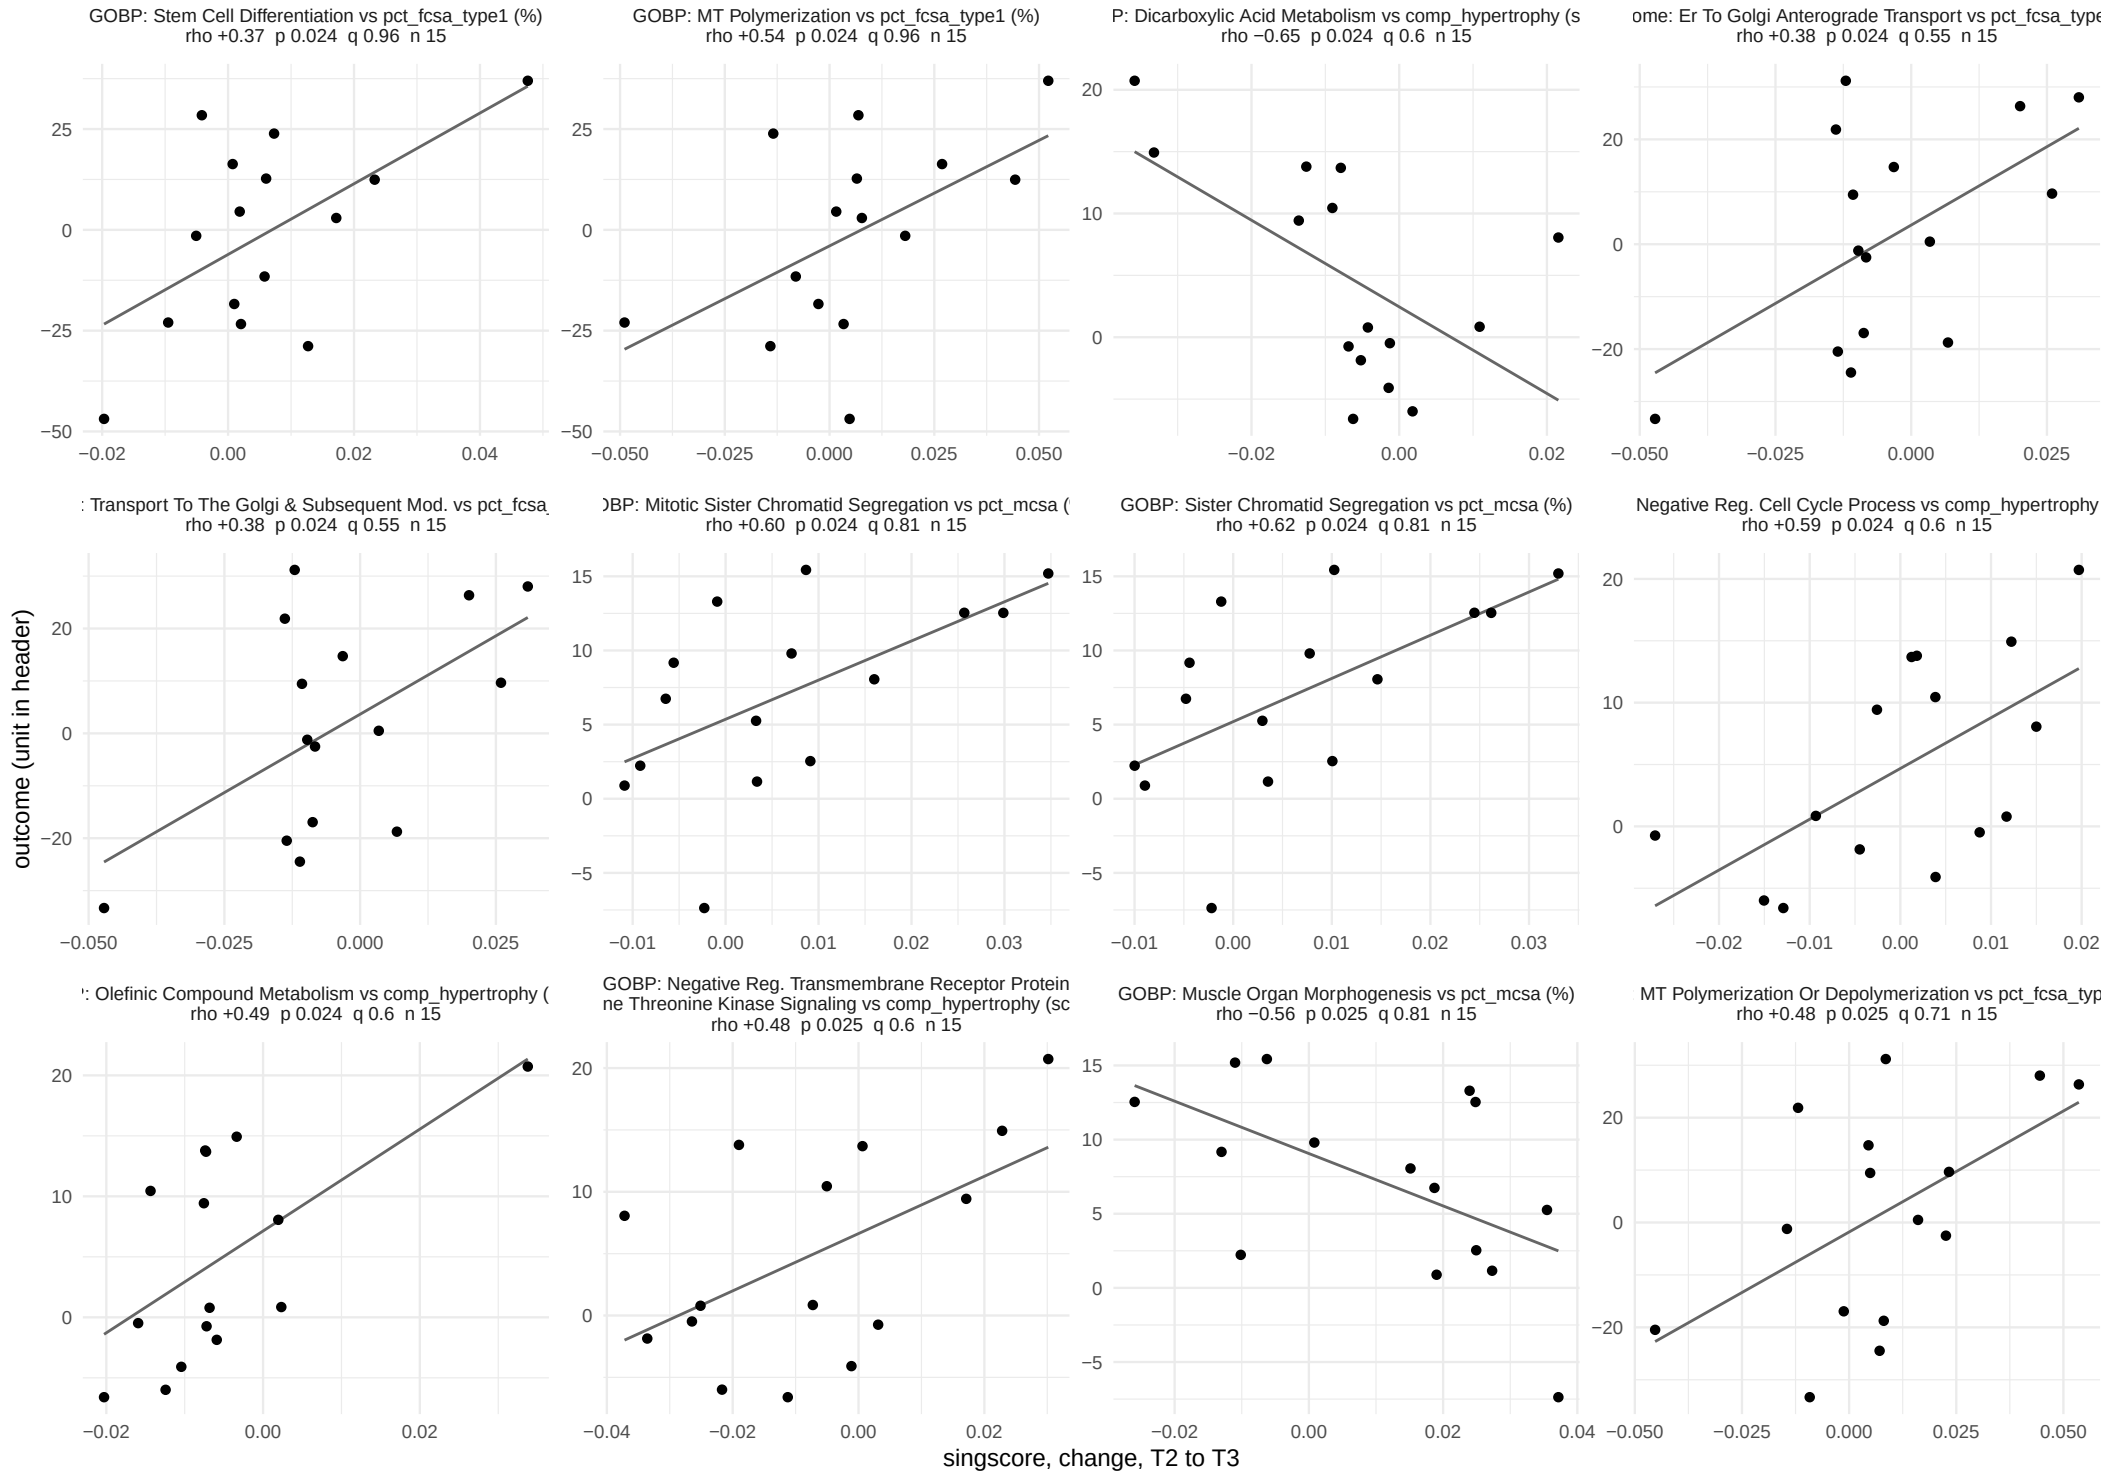

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, acute window


407 of 11024 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 16 of 34.

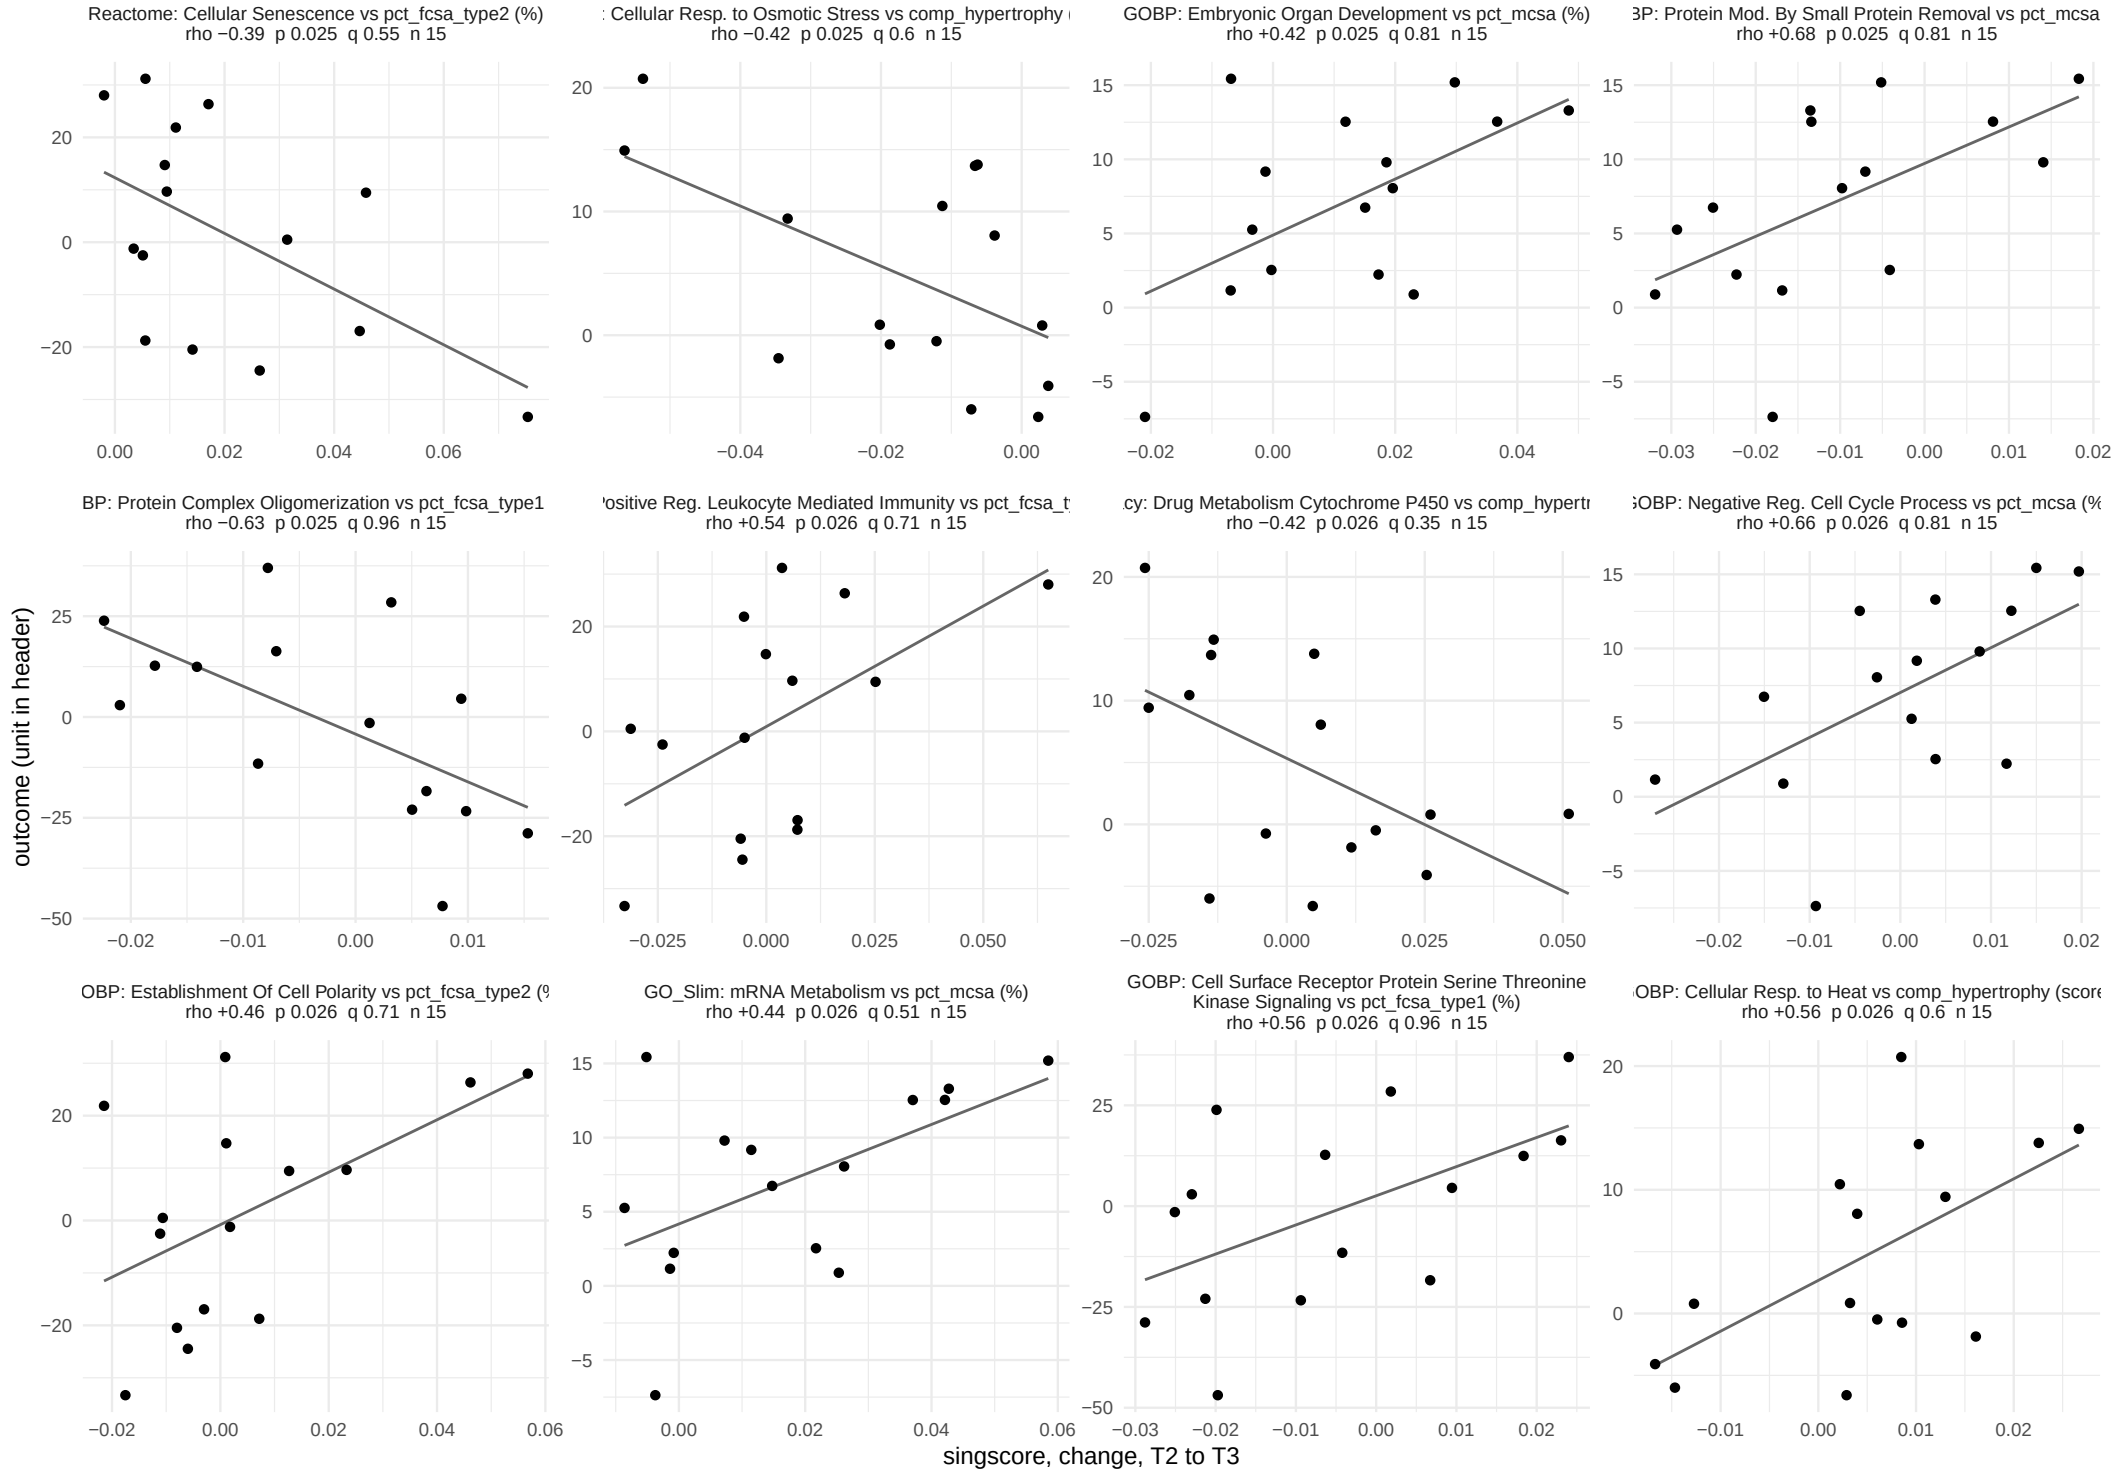

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, acute window


407 of 11024 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 17 of 34.

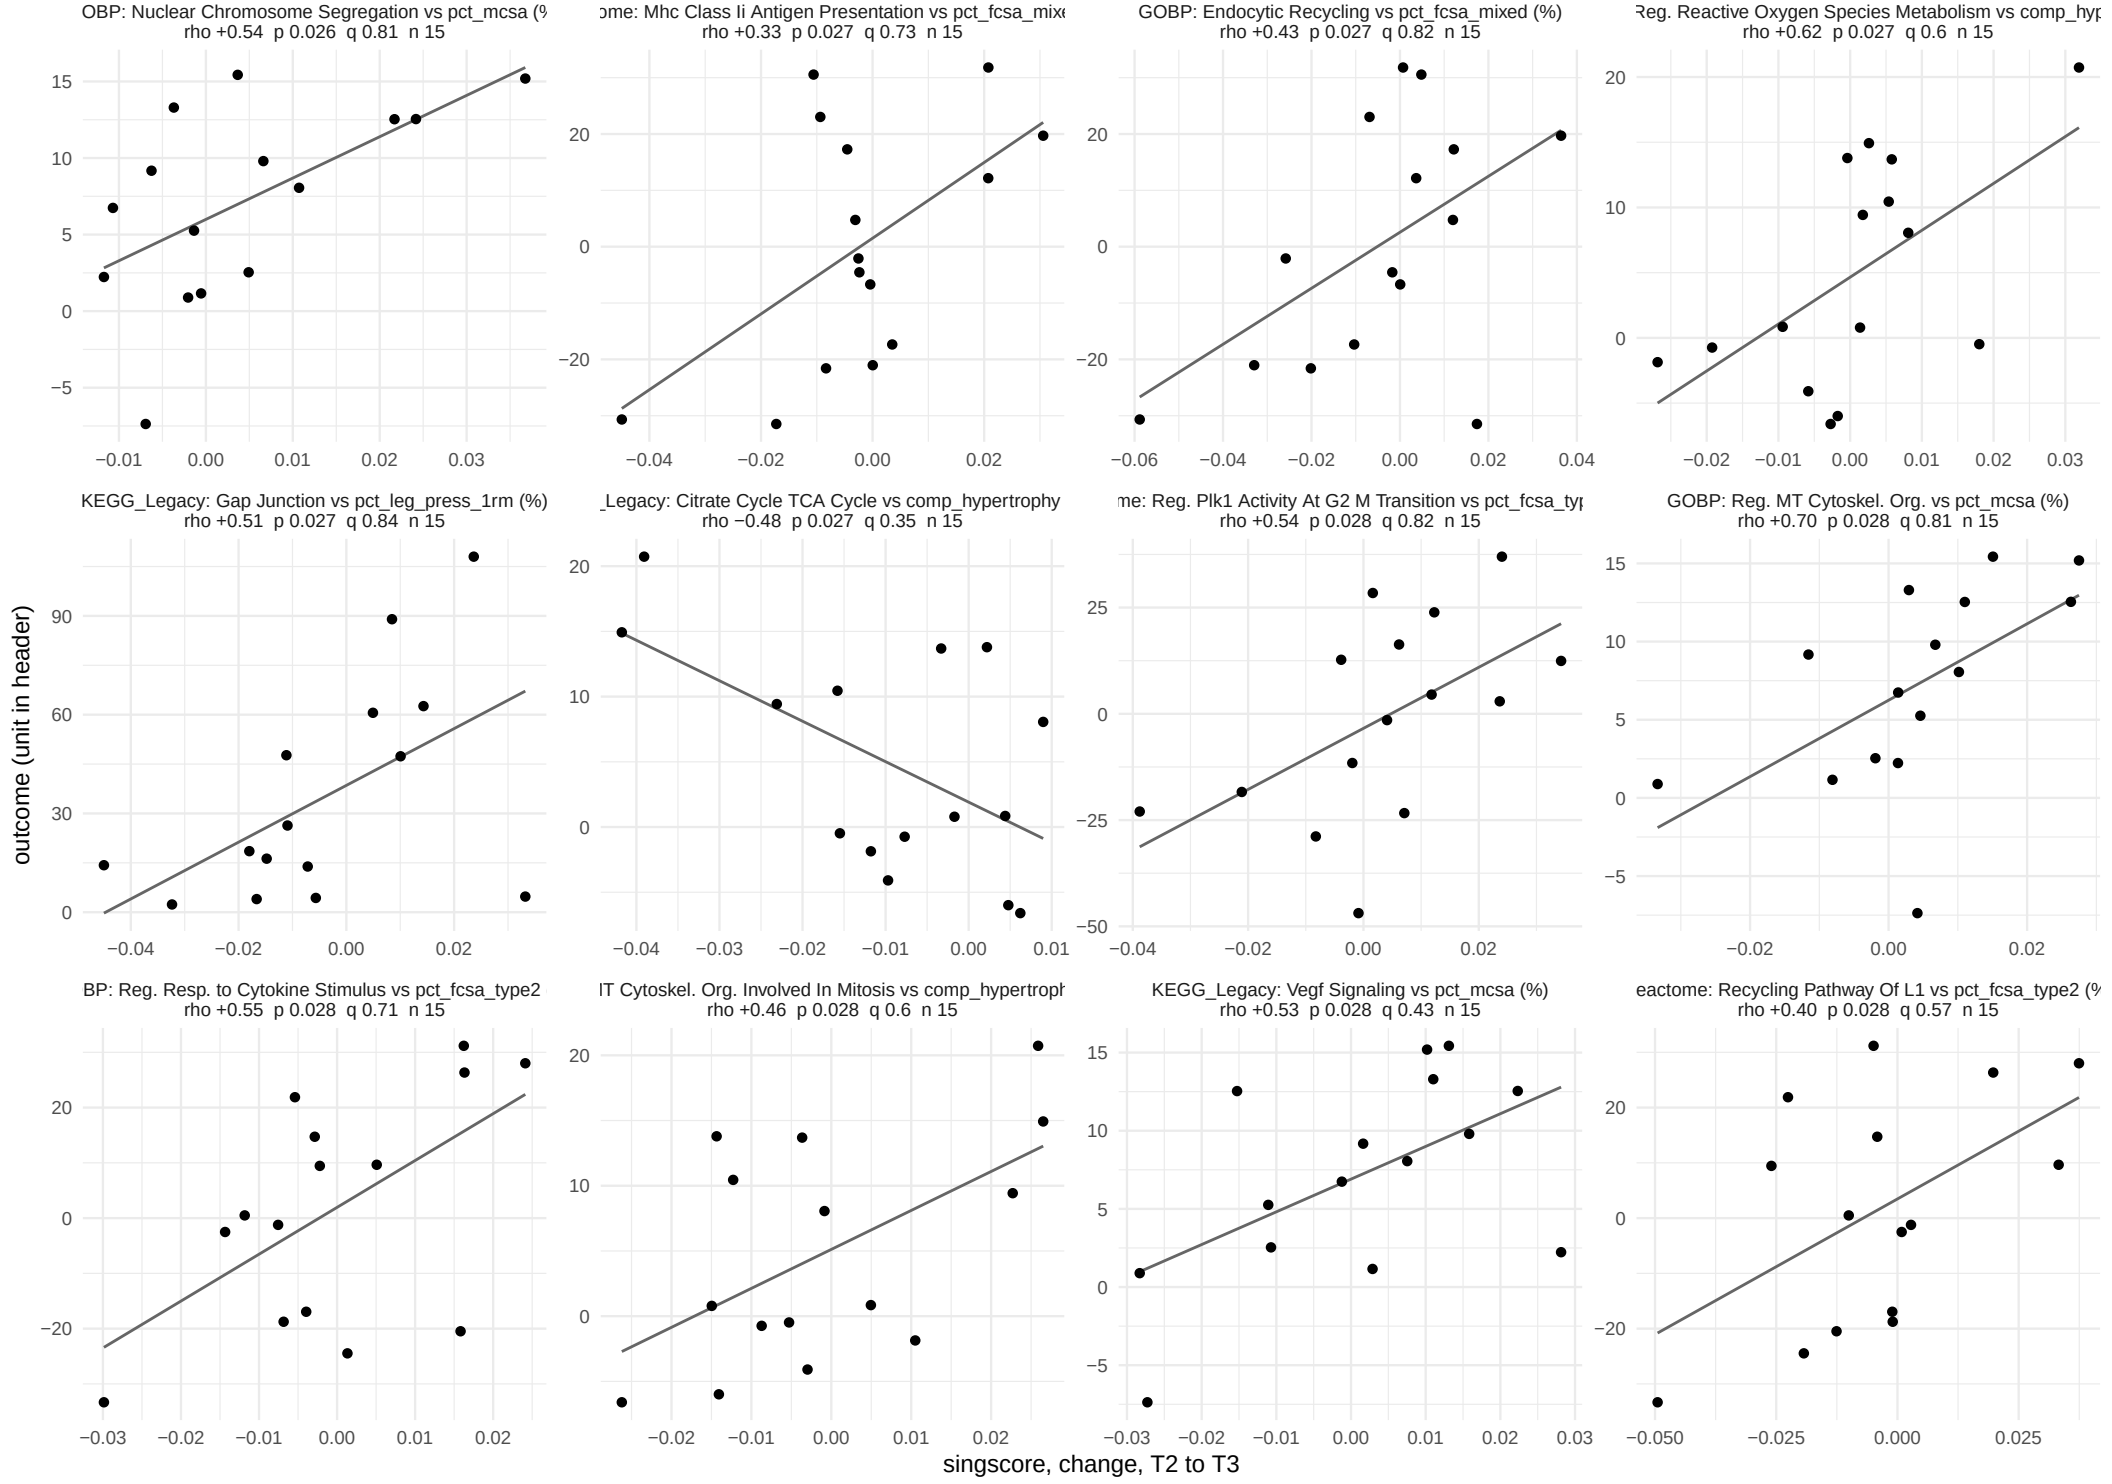

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, acute window


407 of 11024 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 18 of 34.

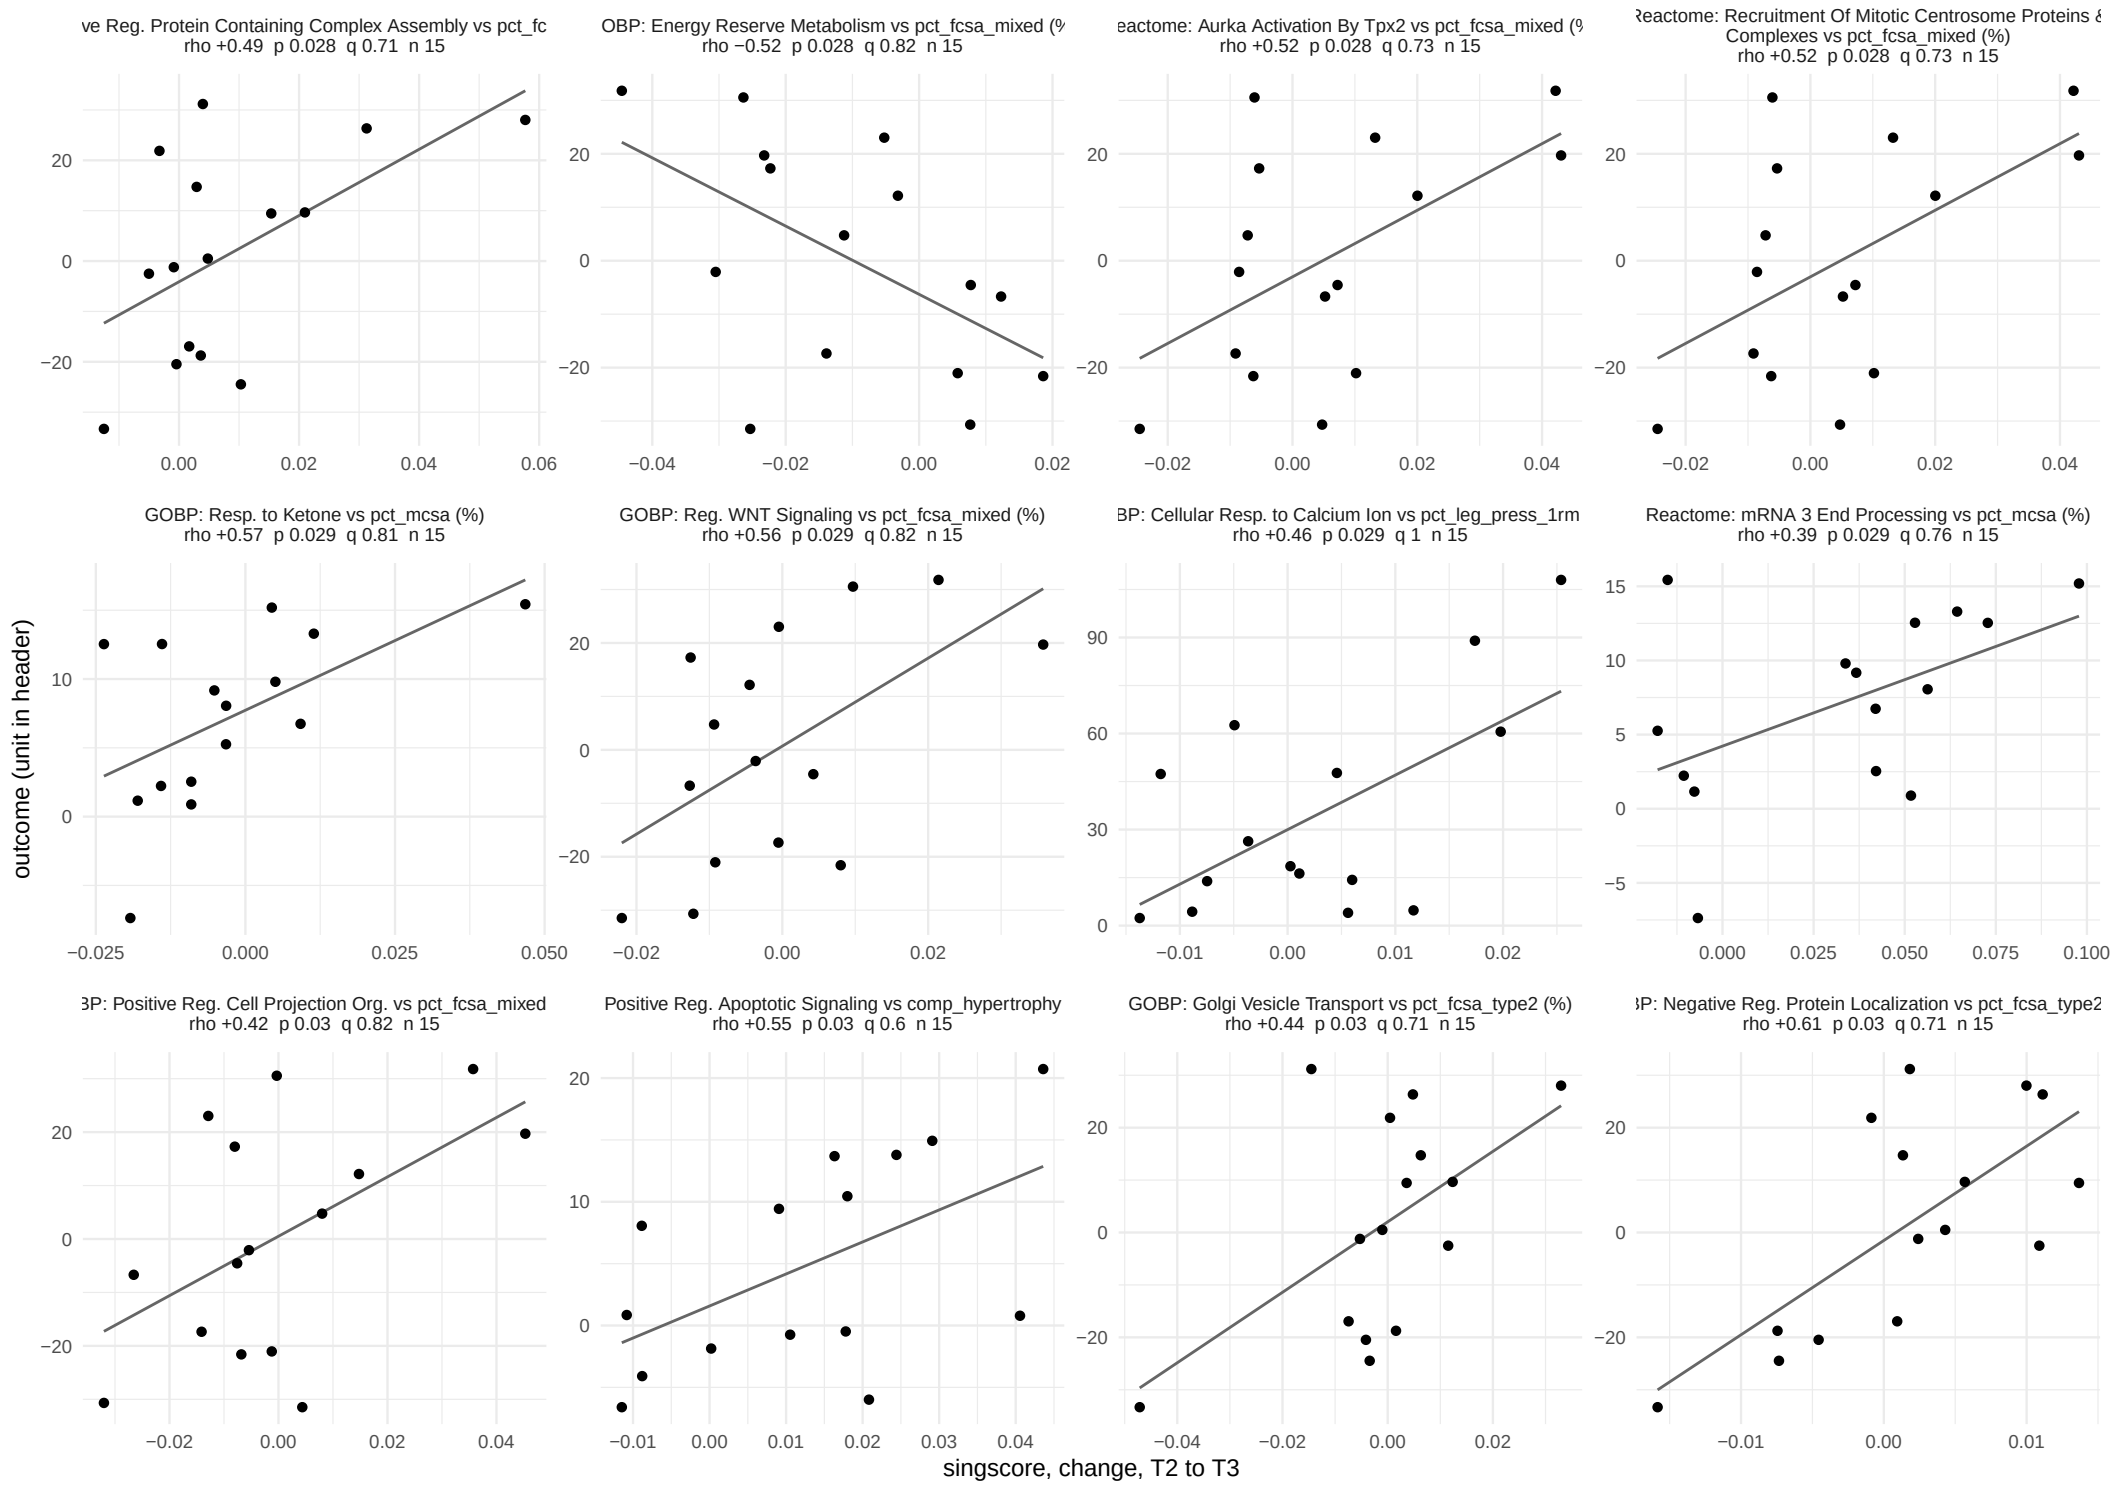

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, acute window


407 of 11024 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 19 of 34.

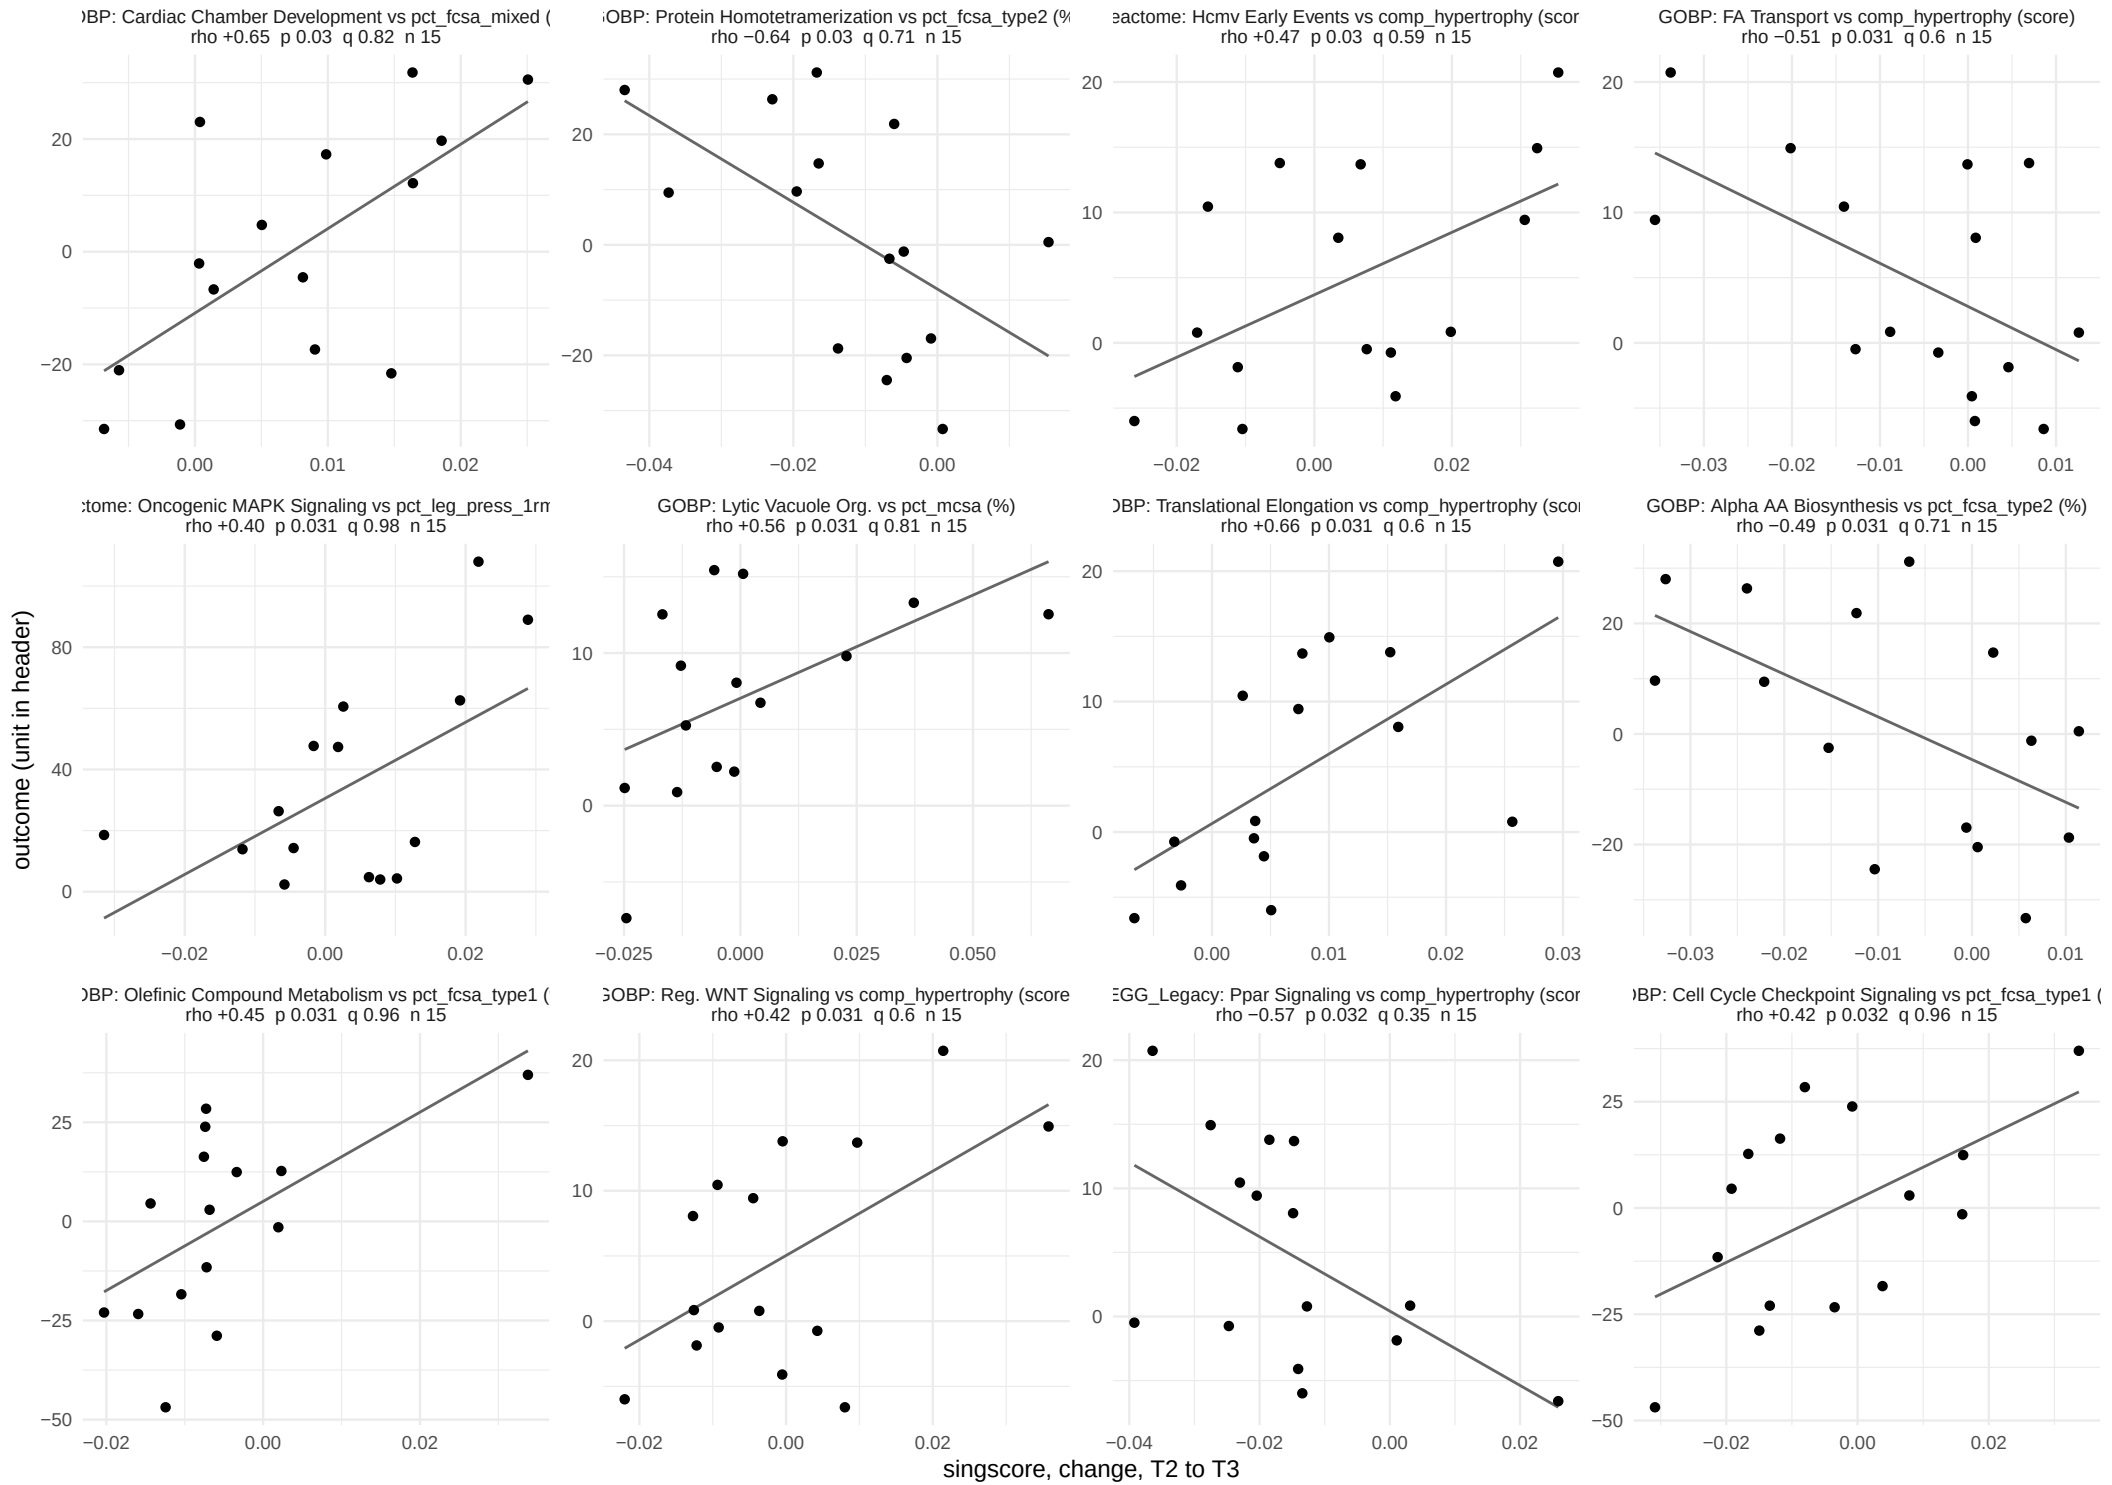

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, acute window


407 of 11024 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 20 of 34.

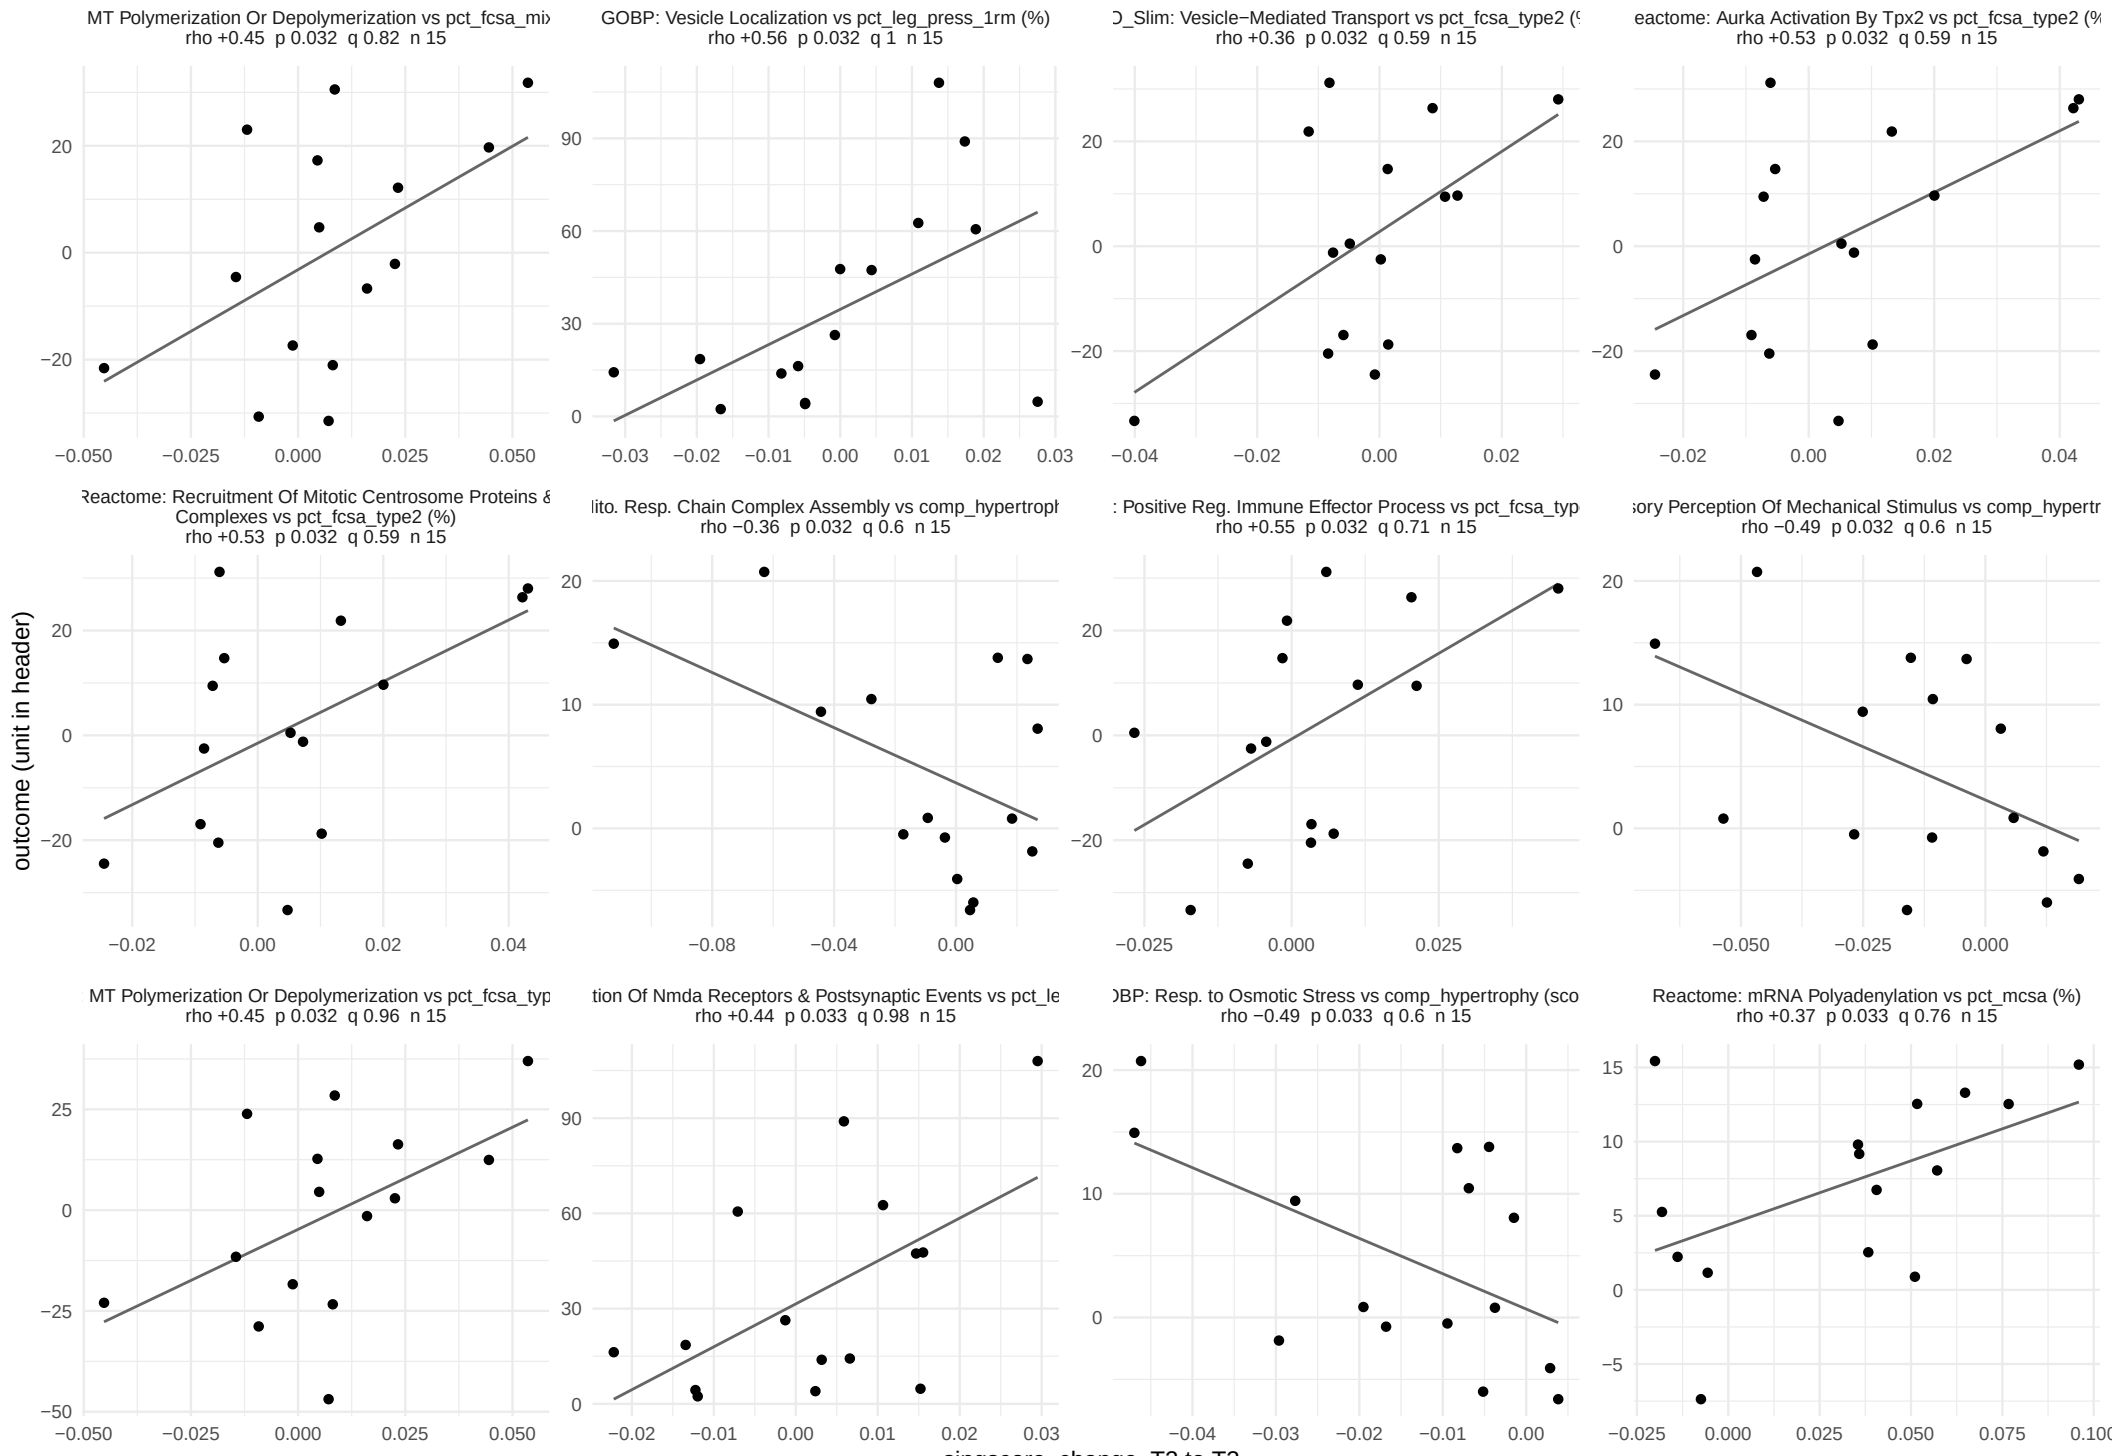

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, acute window


407 of 11024 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 21 of 34.

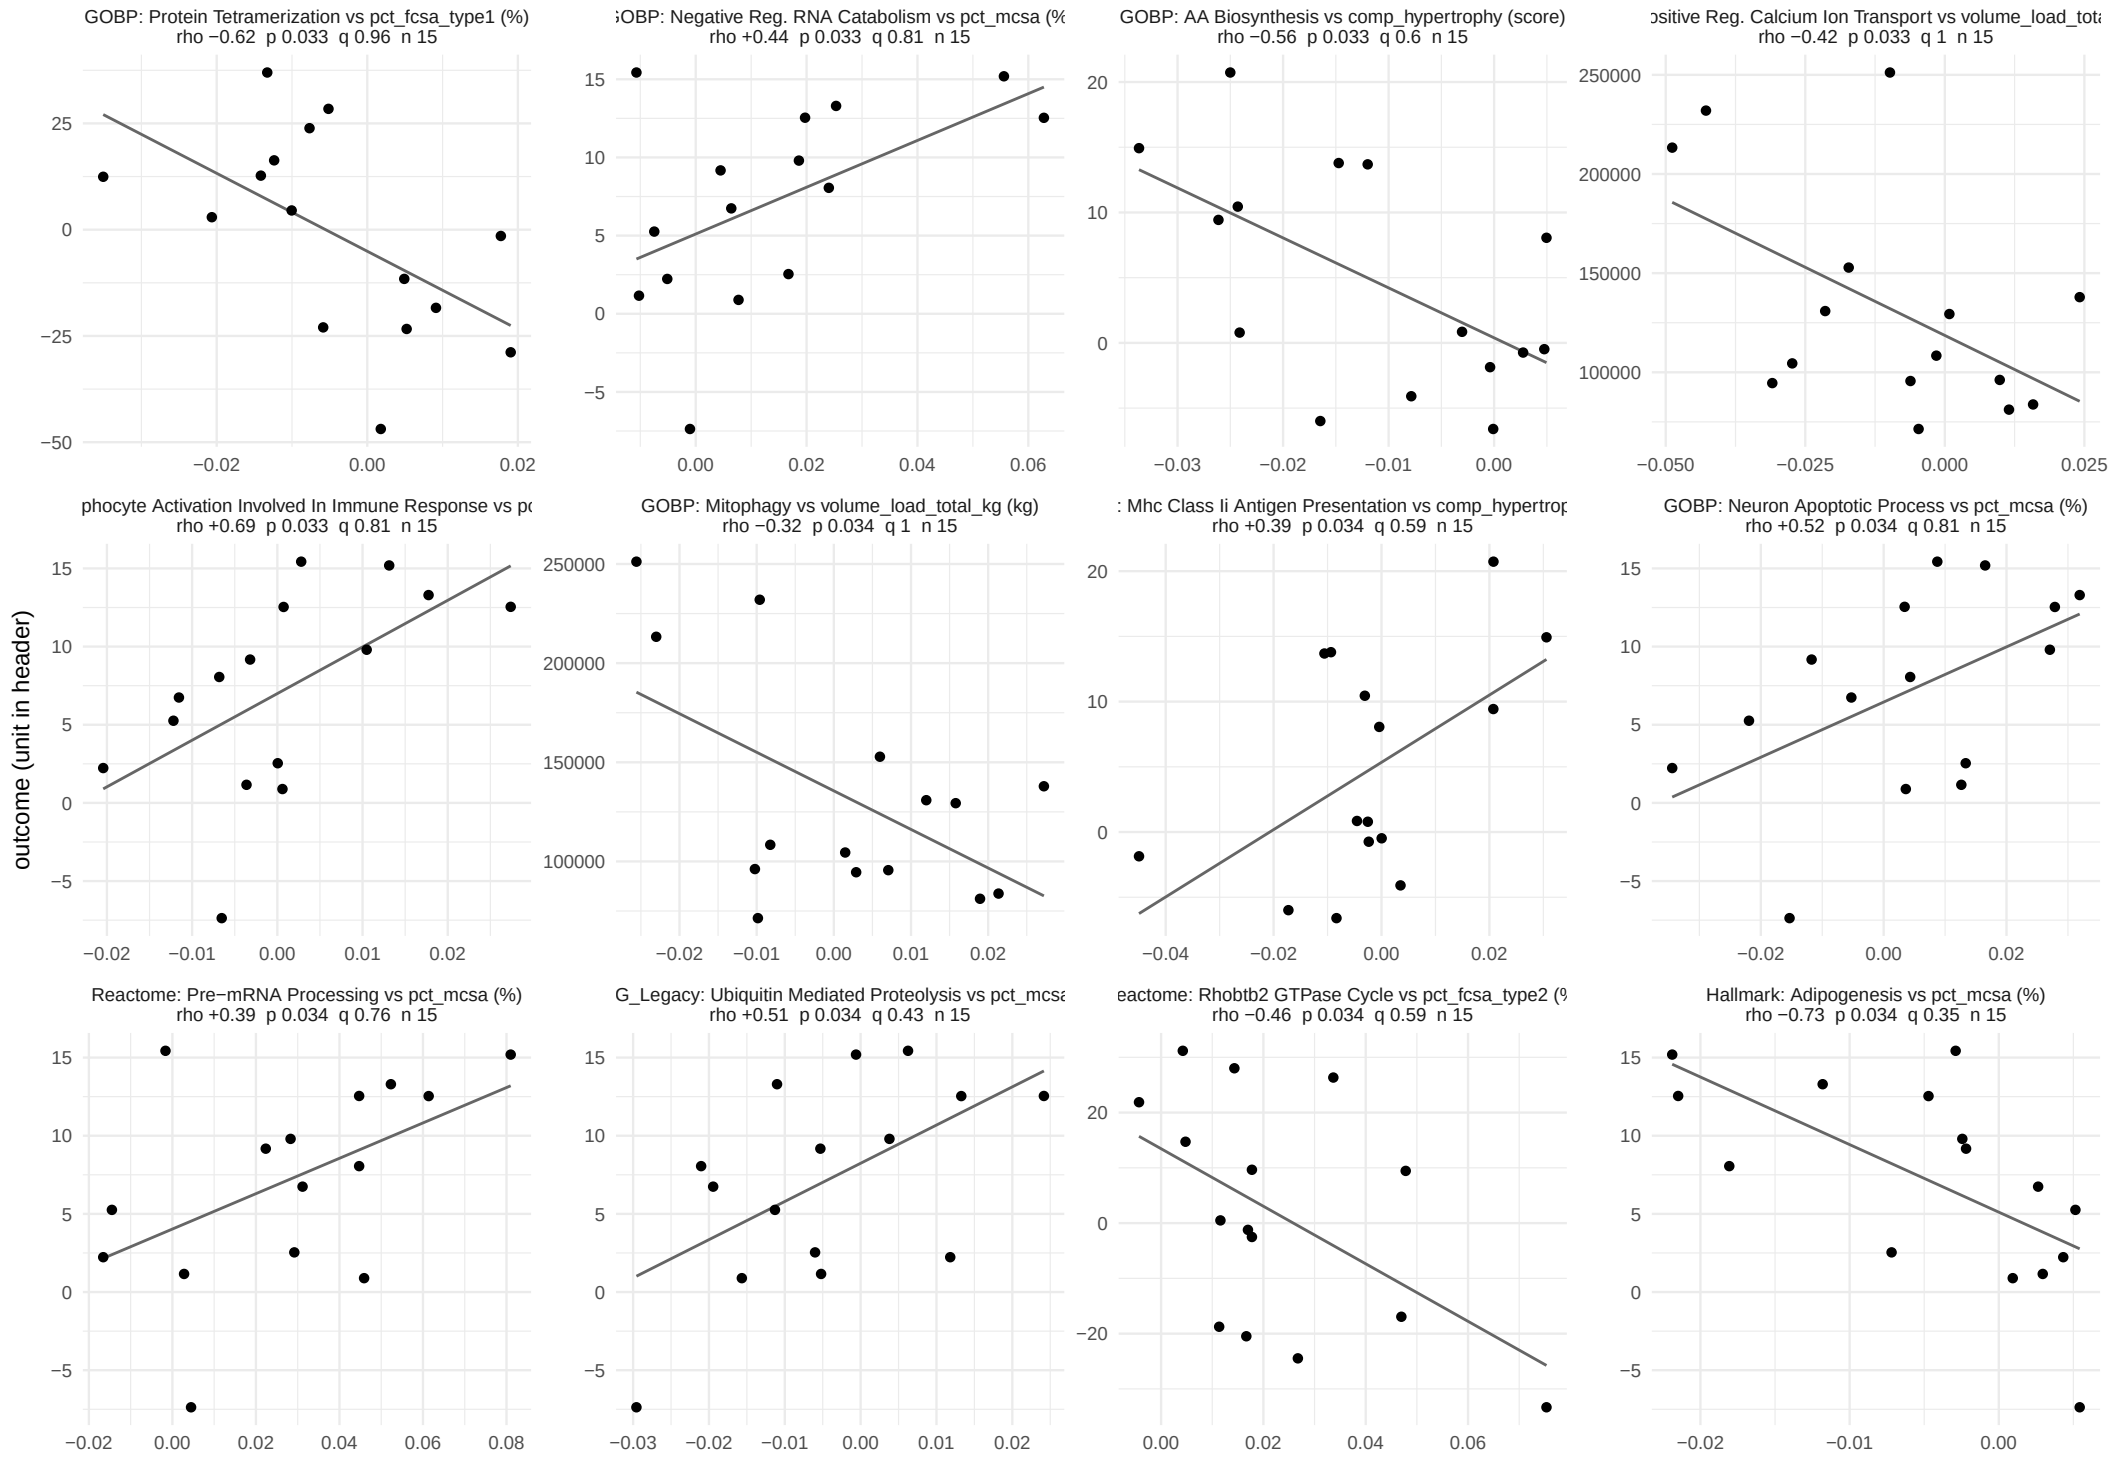

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, acute window


407 of 11024 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 22 of 34.

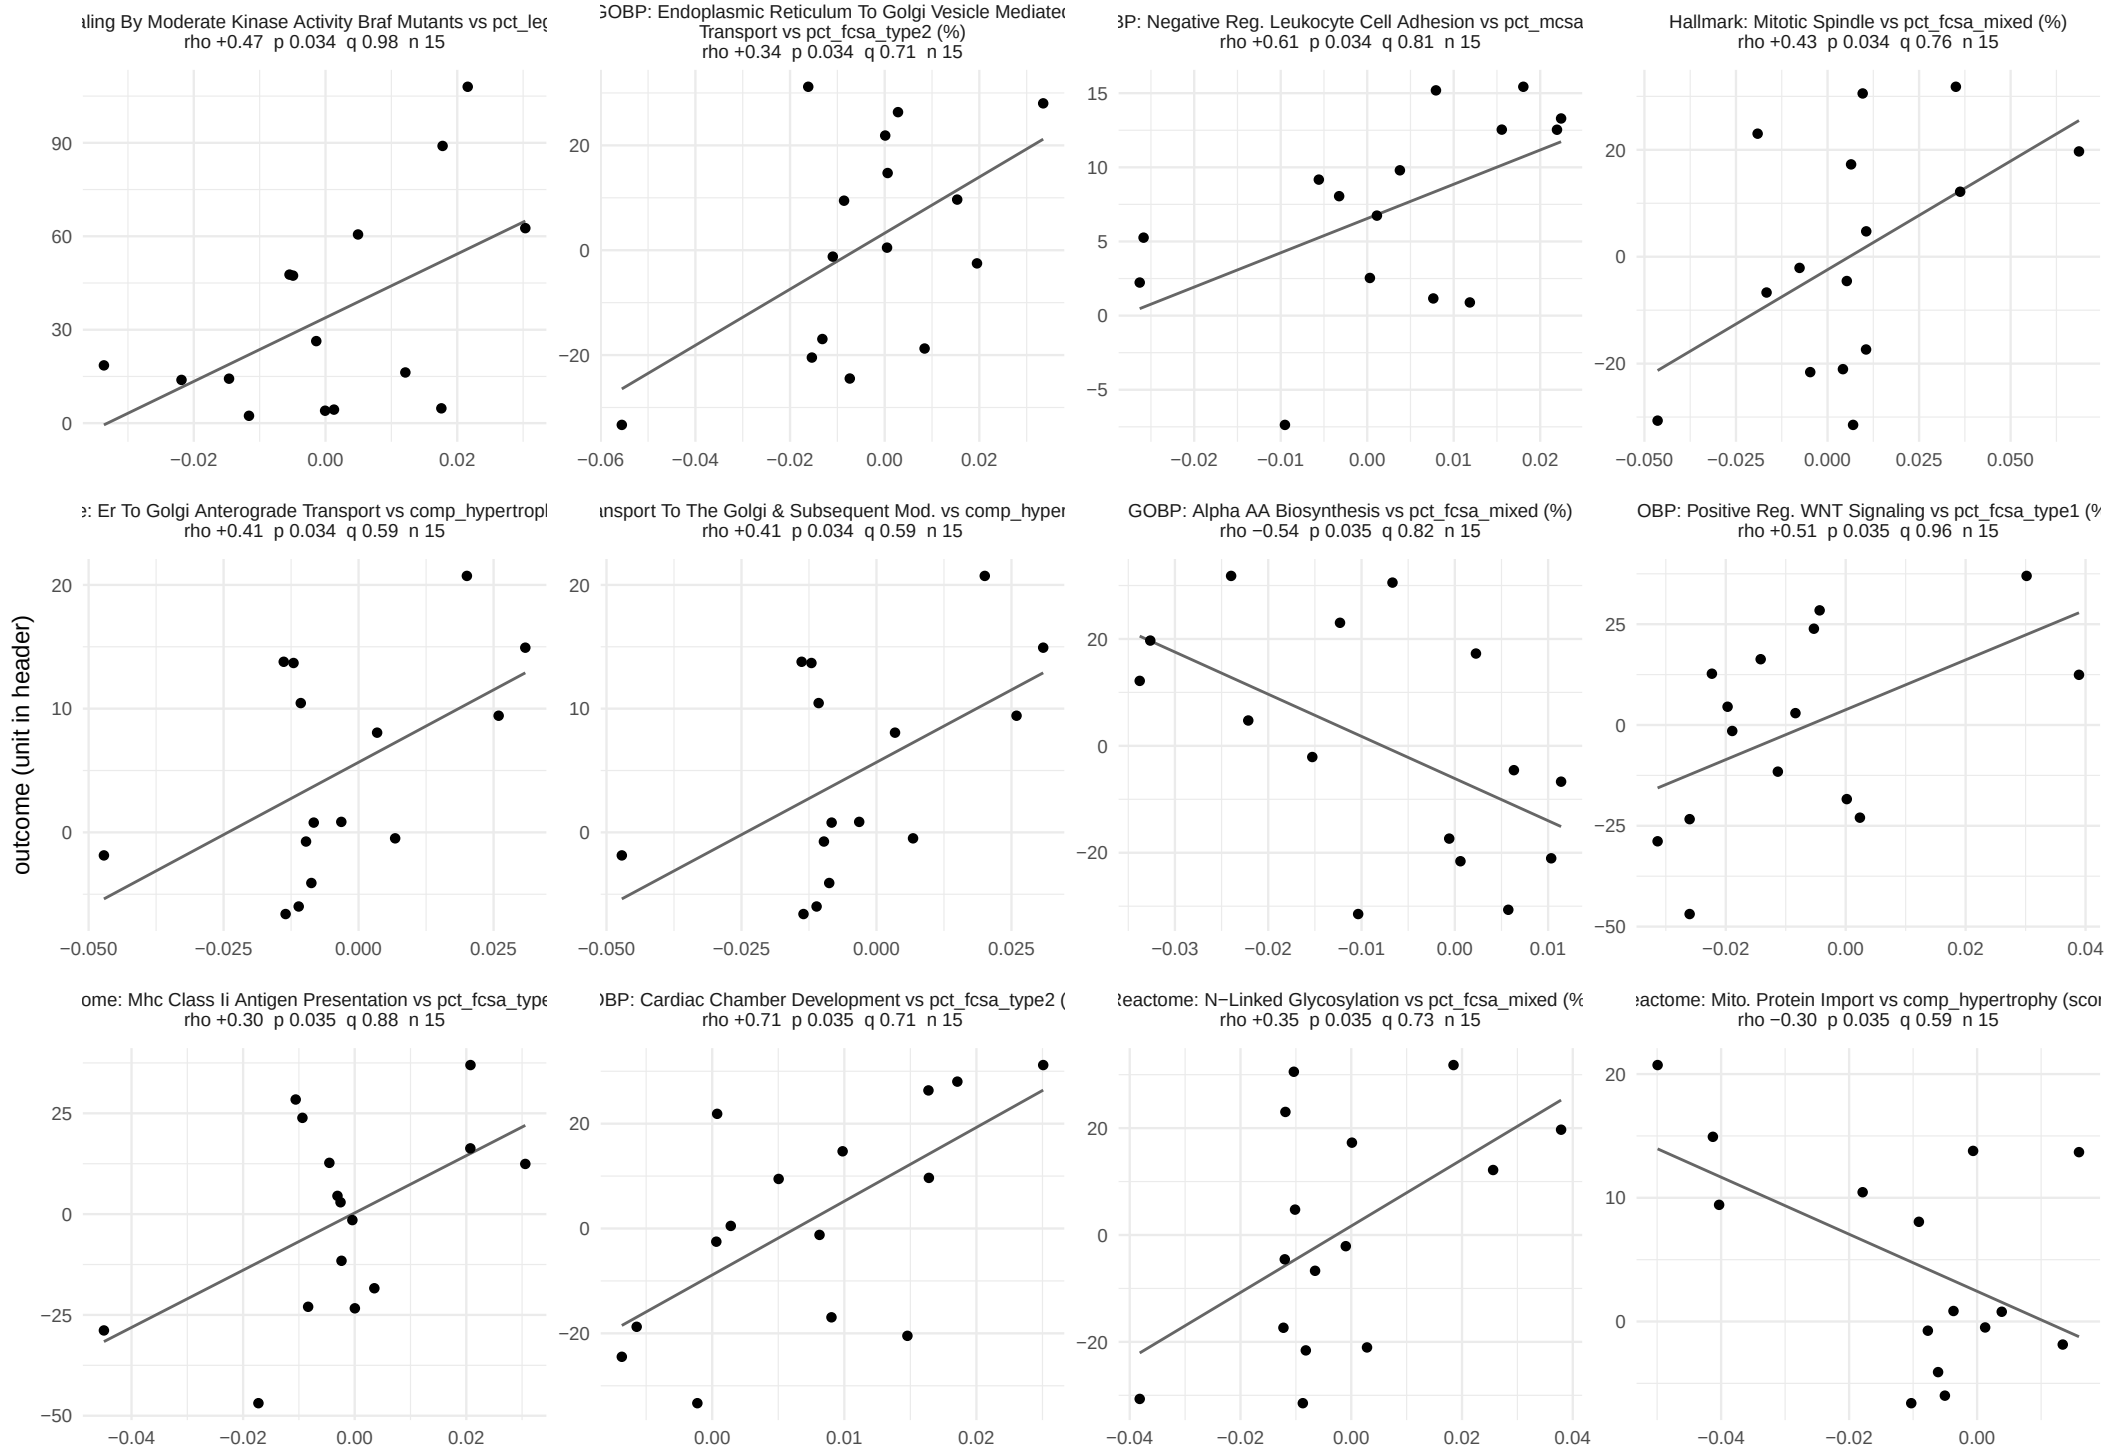

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, acute window


407 of 11024 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 23 of 34.

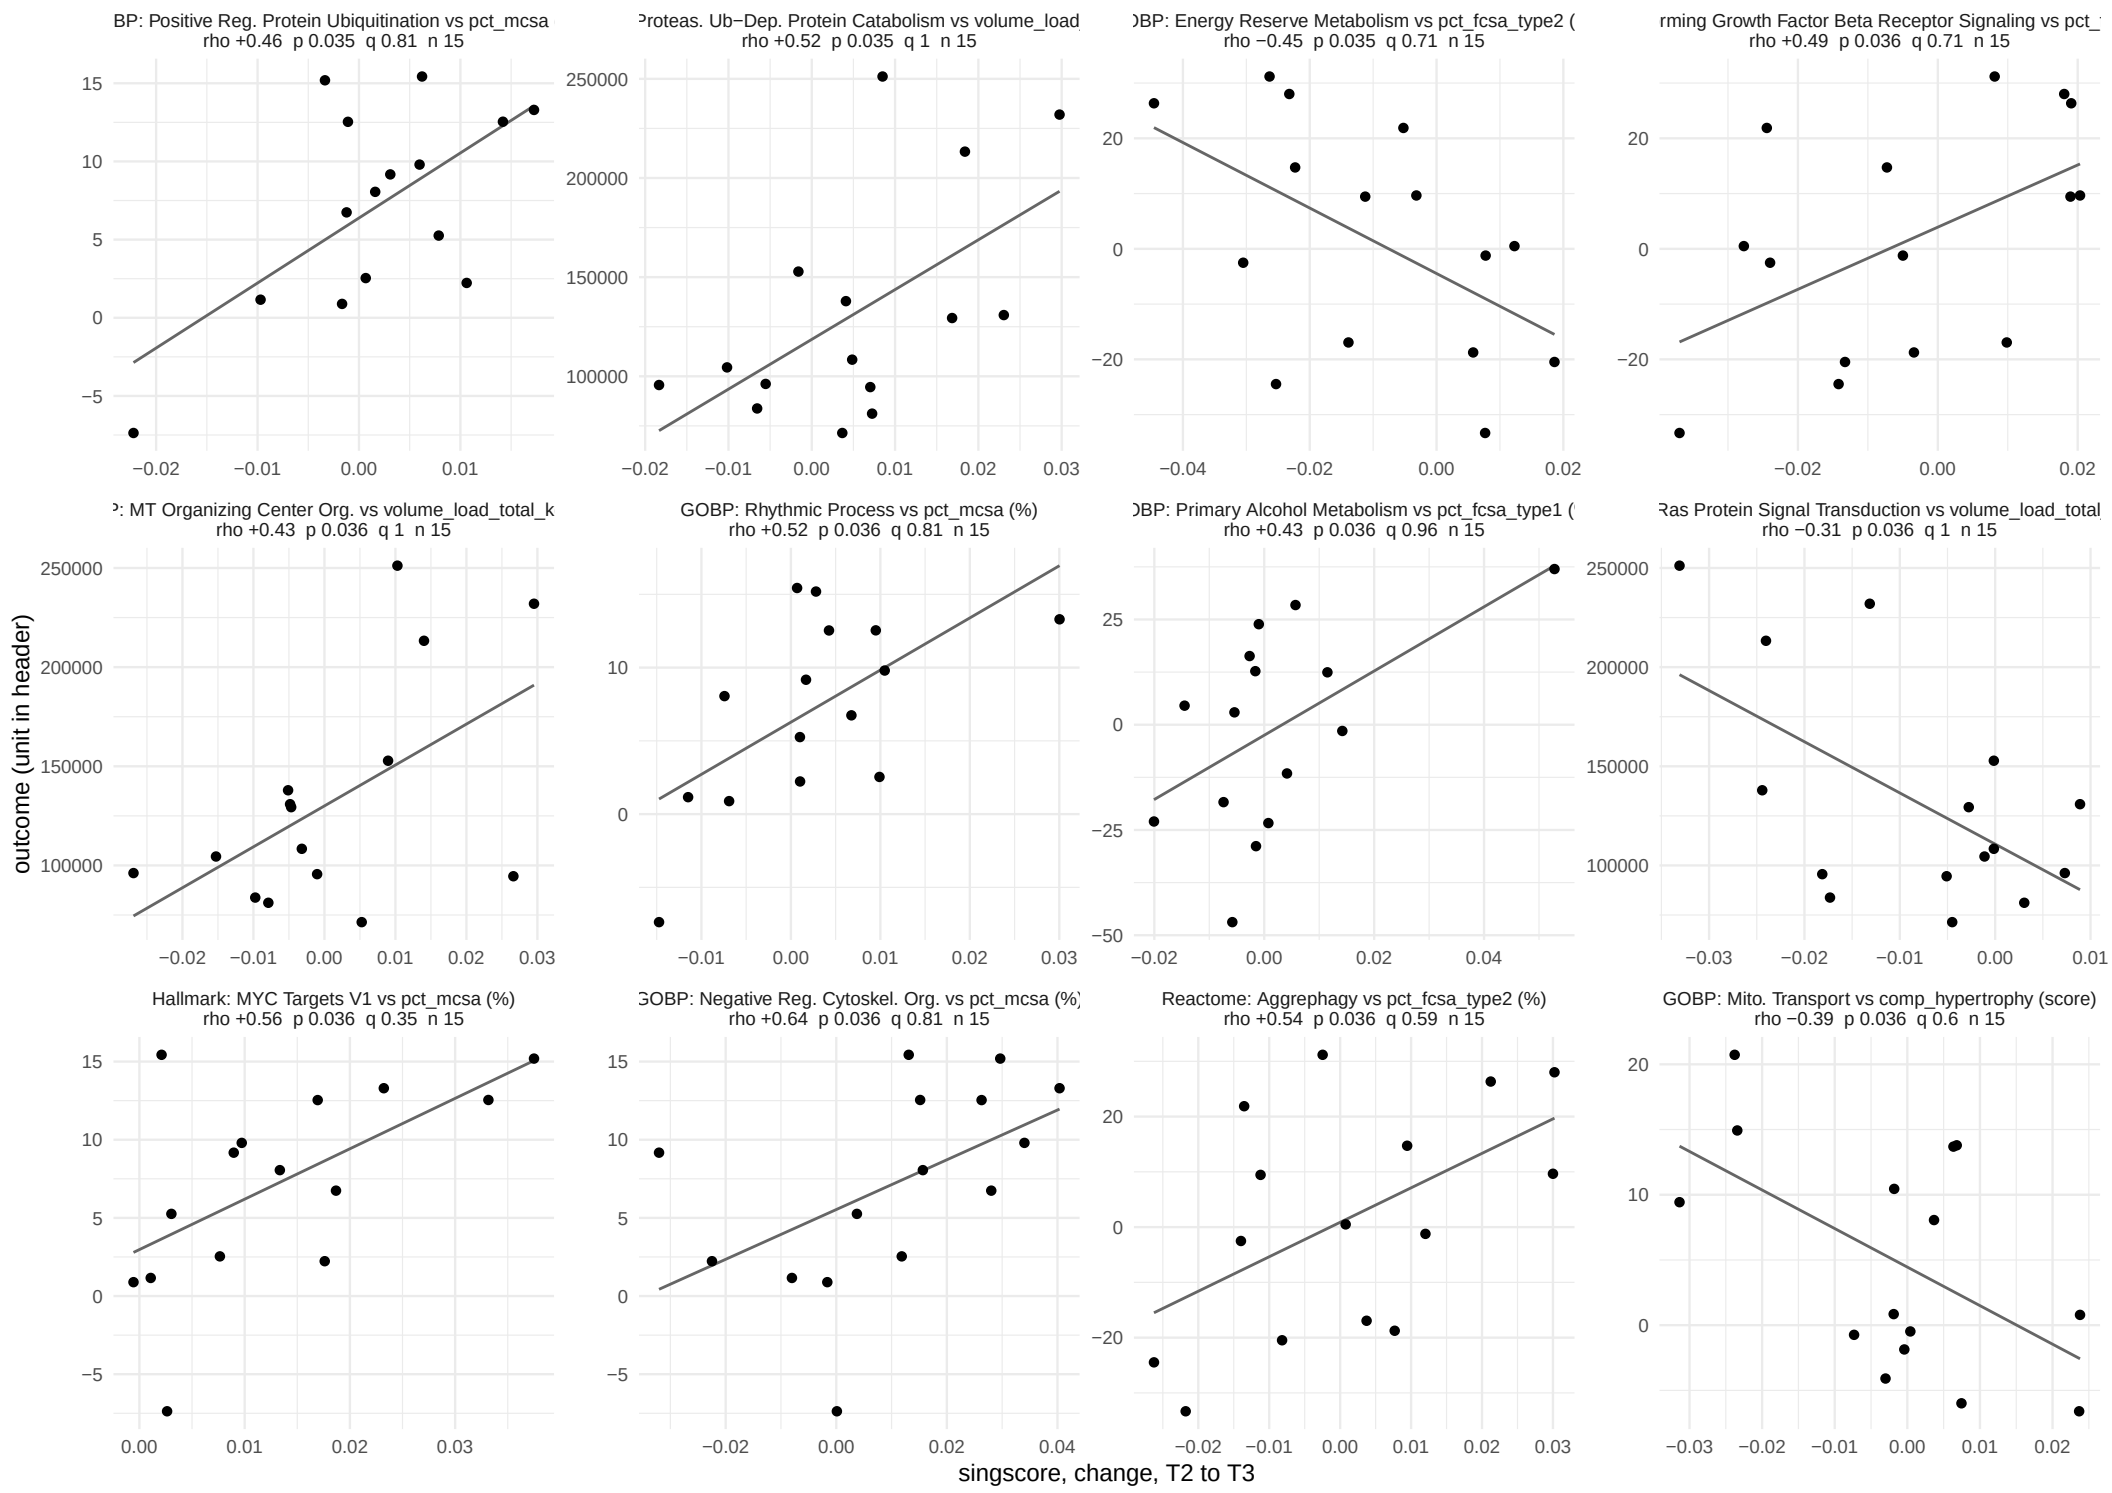

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, acute window


407 of 11024 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 24 of 34.

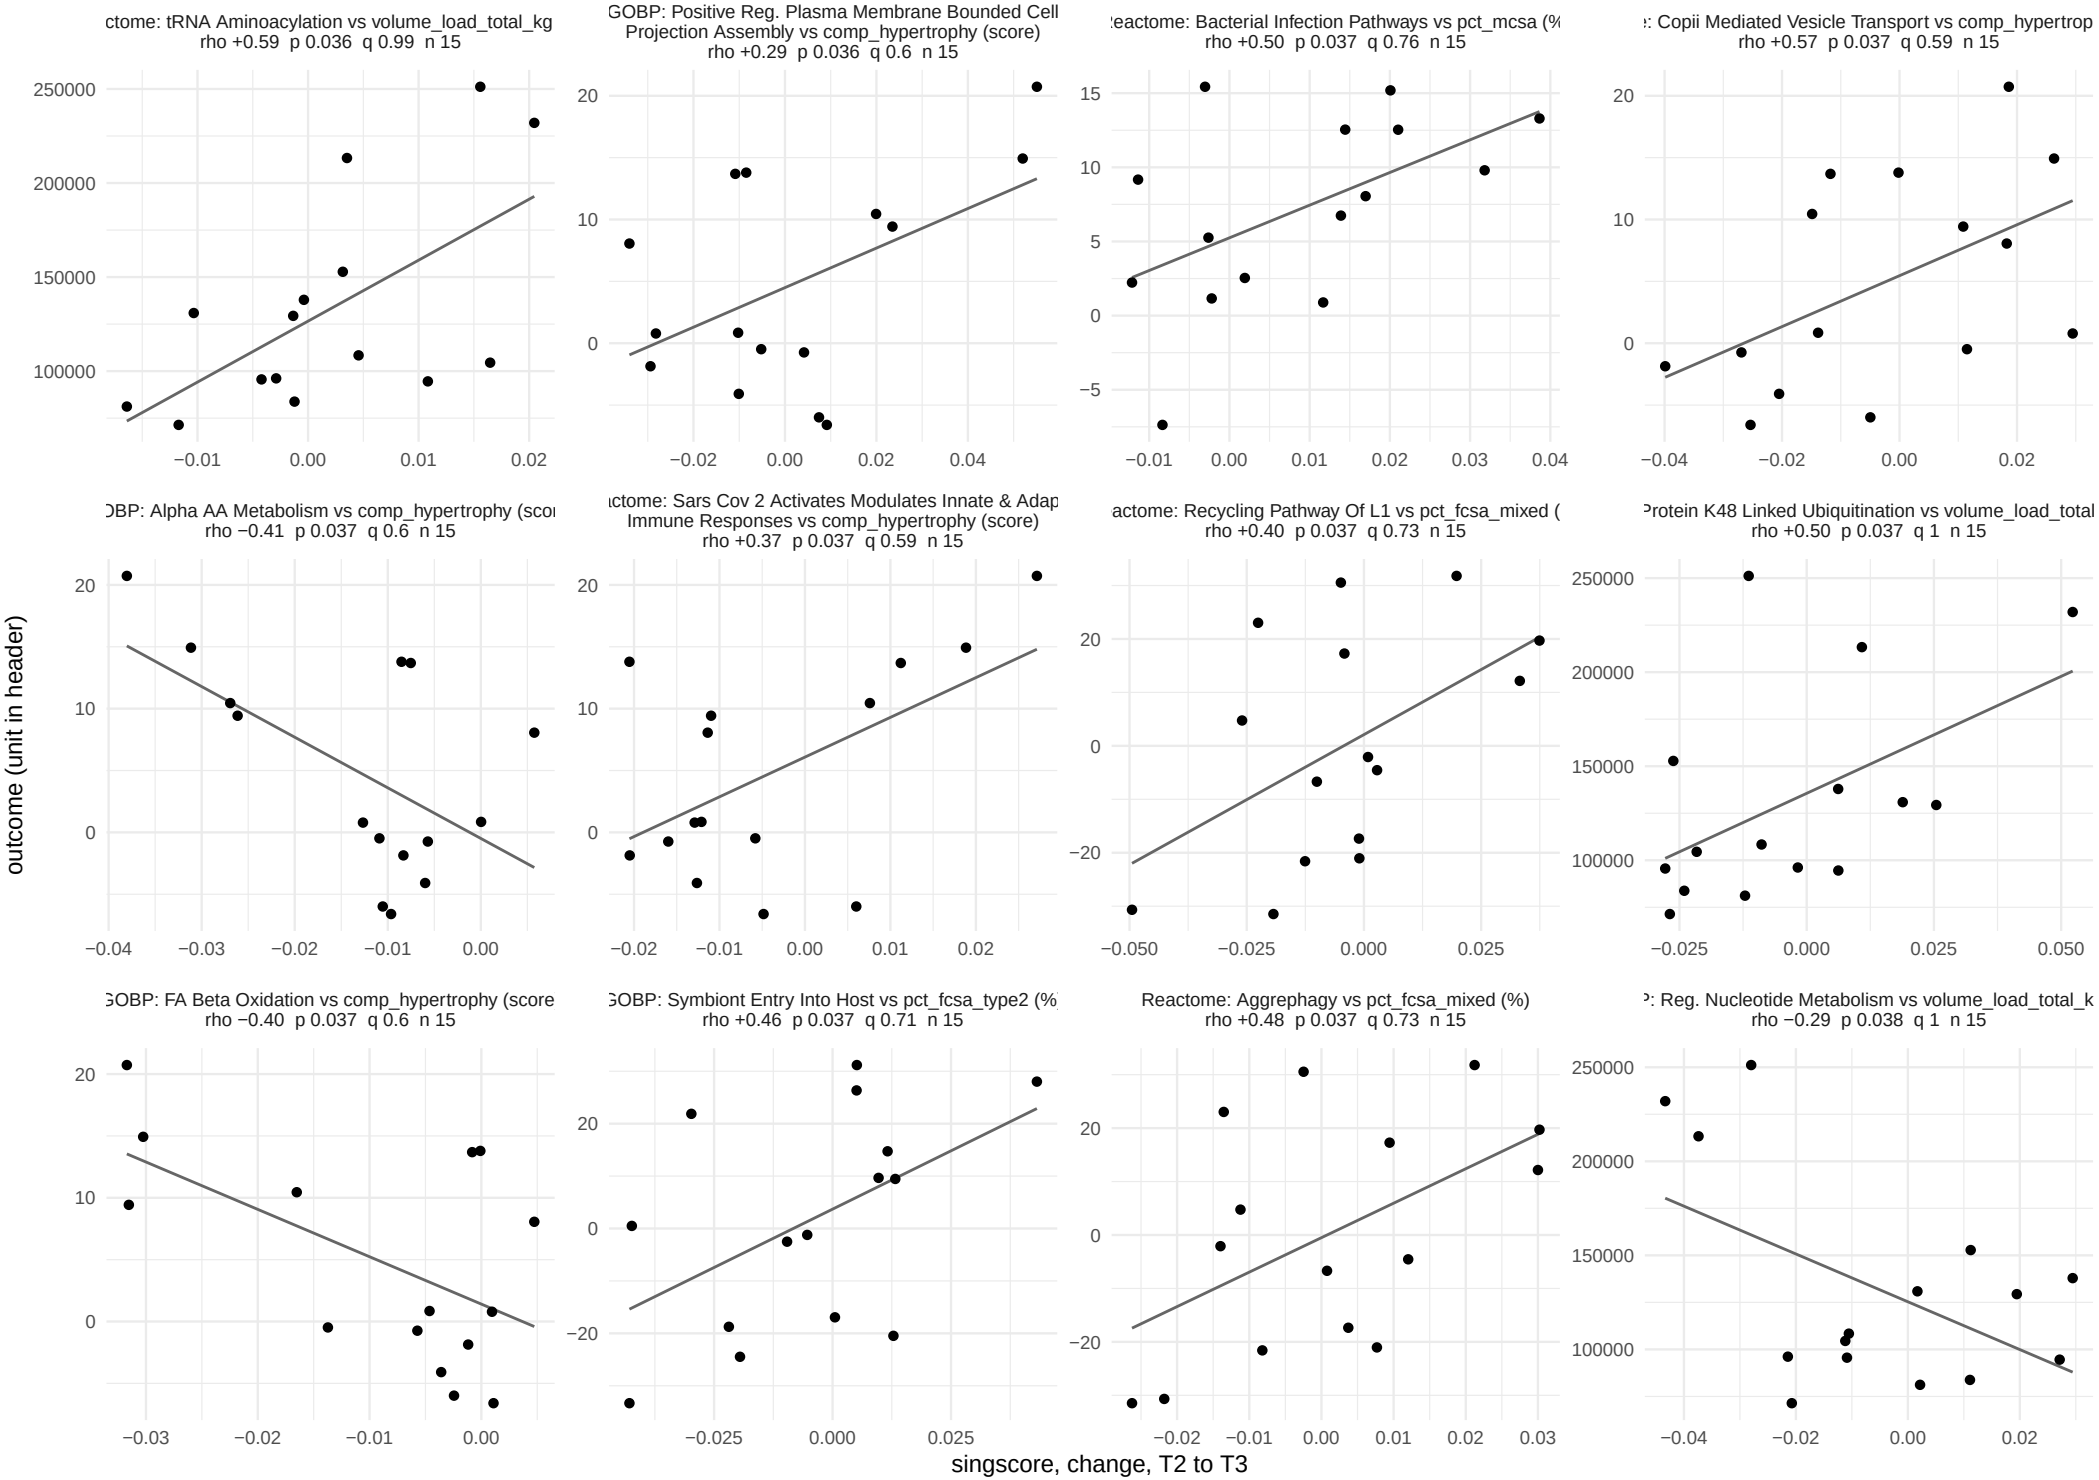

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, acute window


407 of 11024 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 25 of 34.

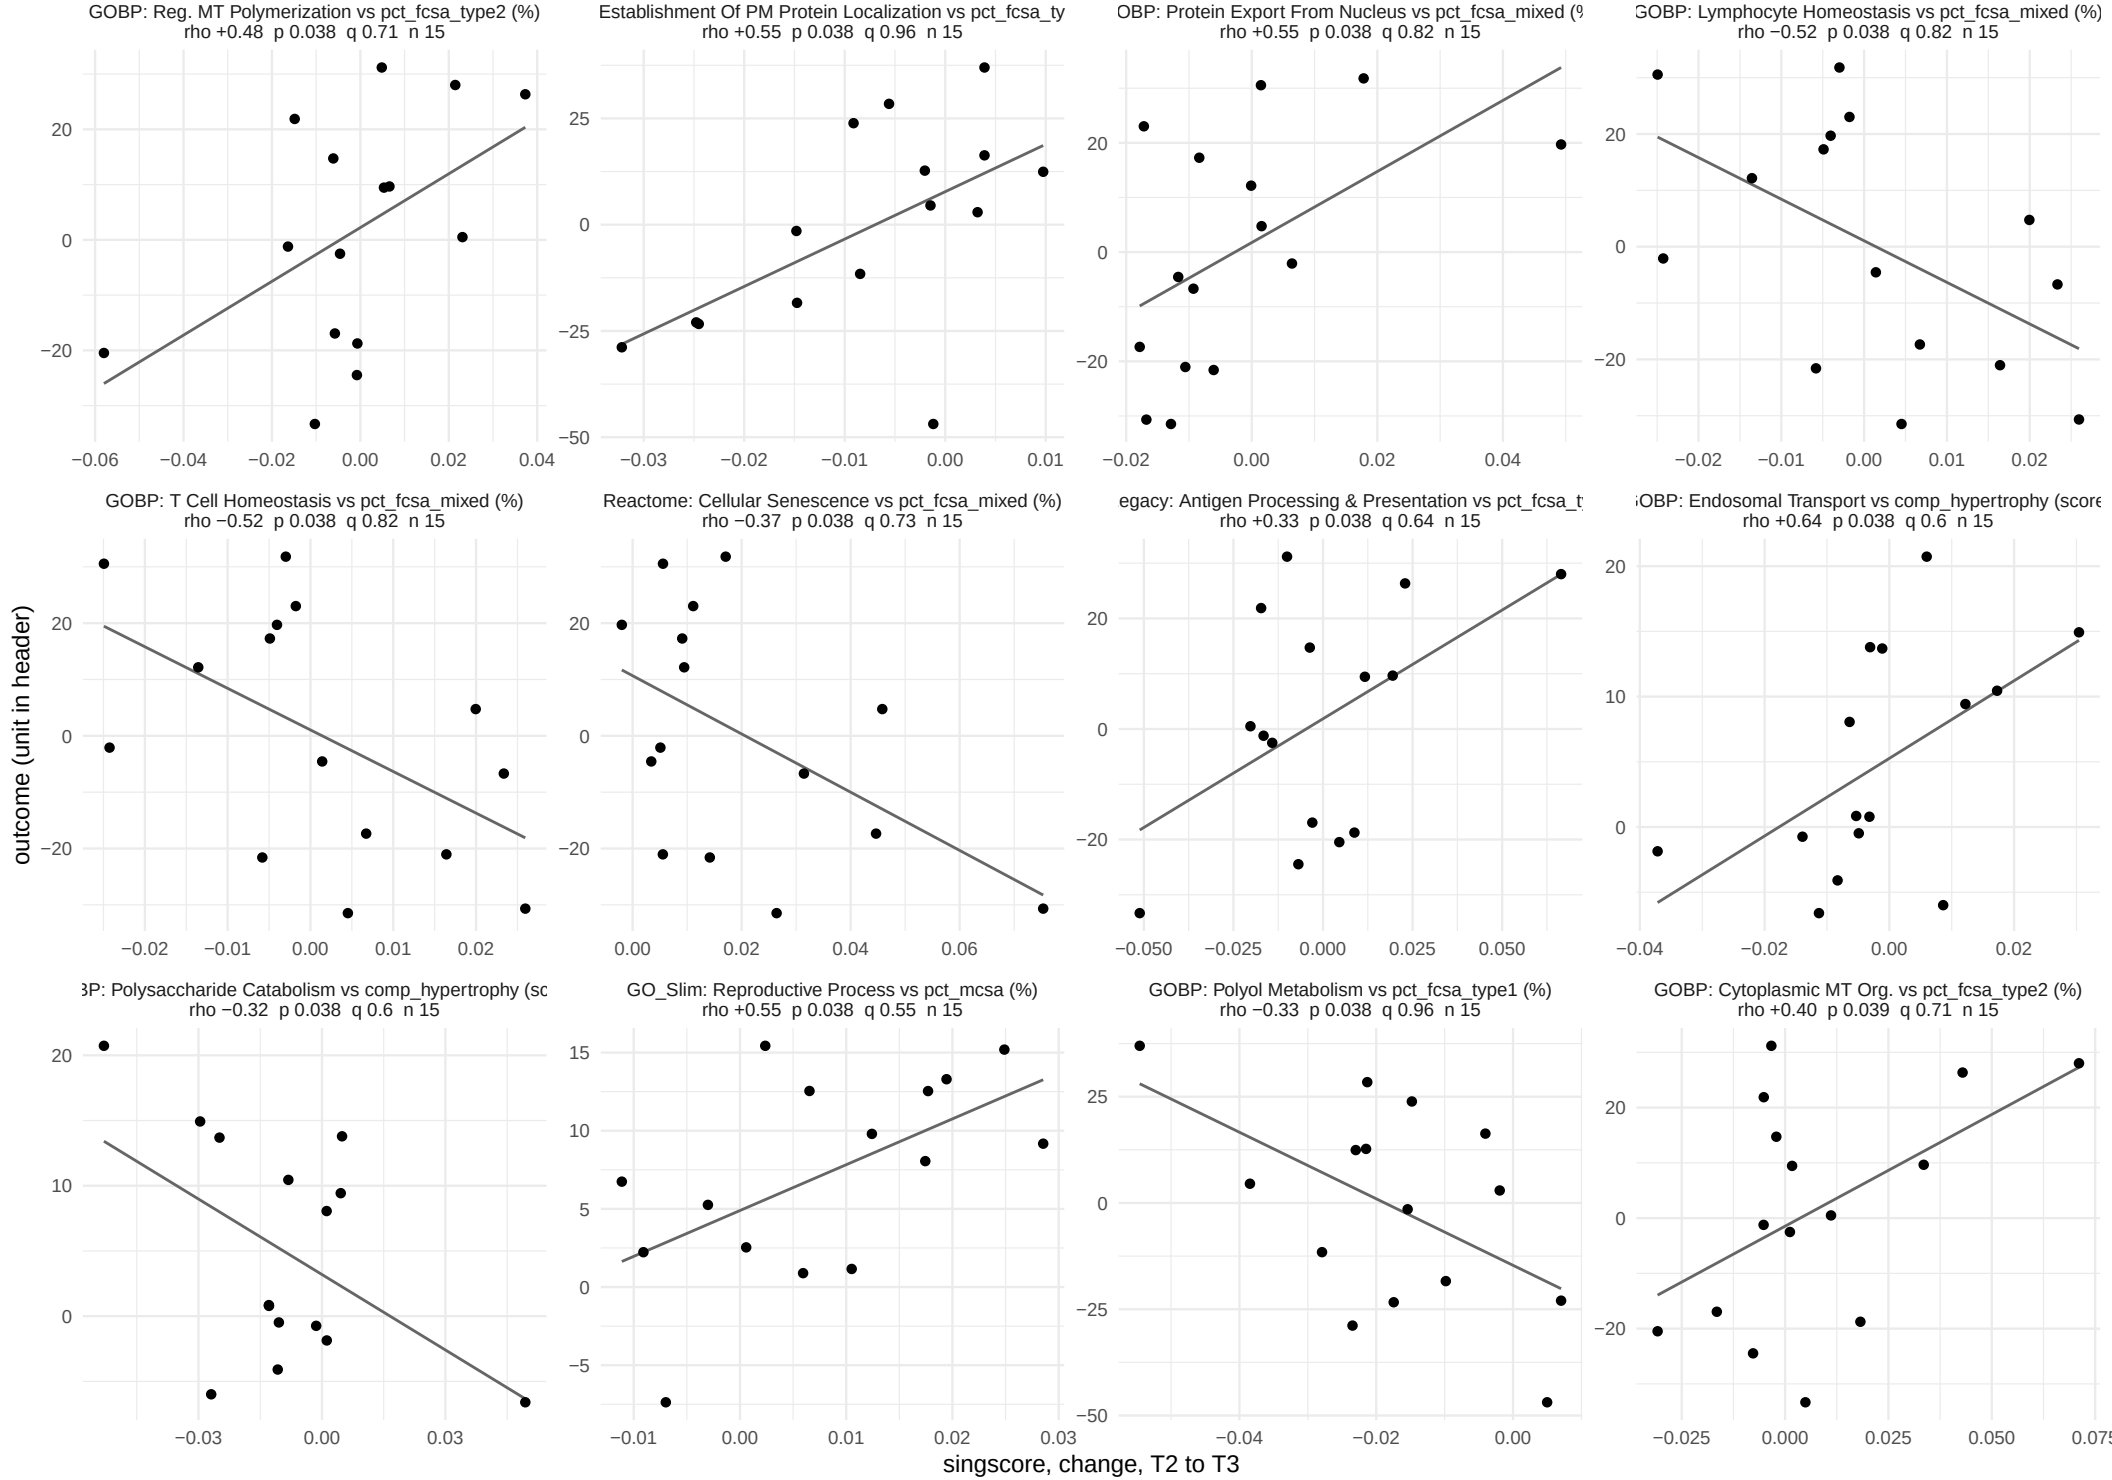

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, acute window


407 of 11024 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 26 of 34.

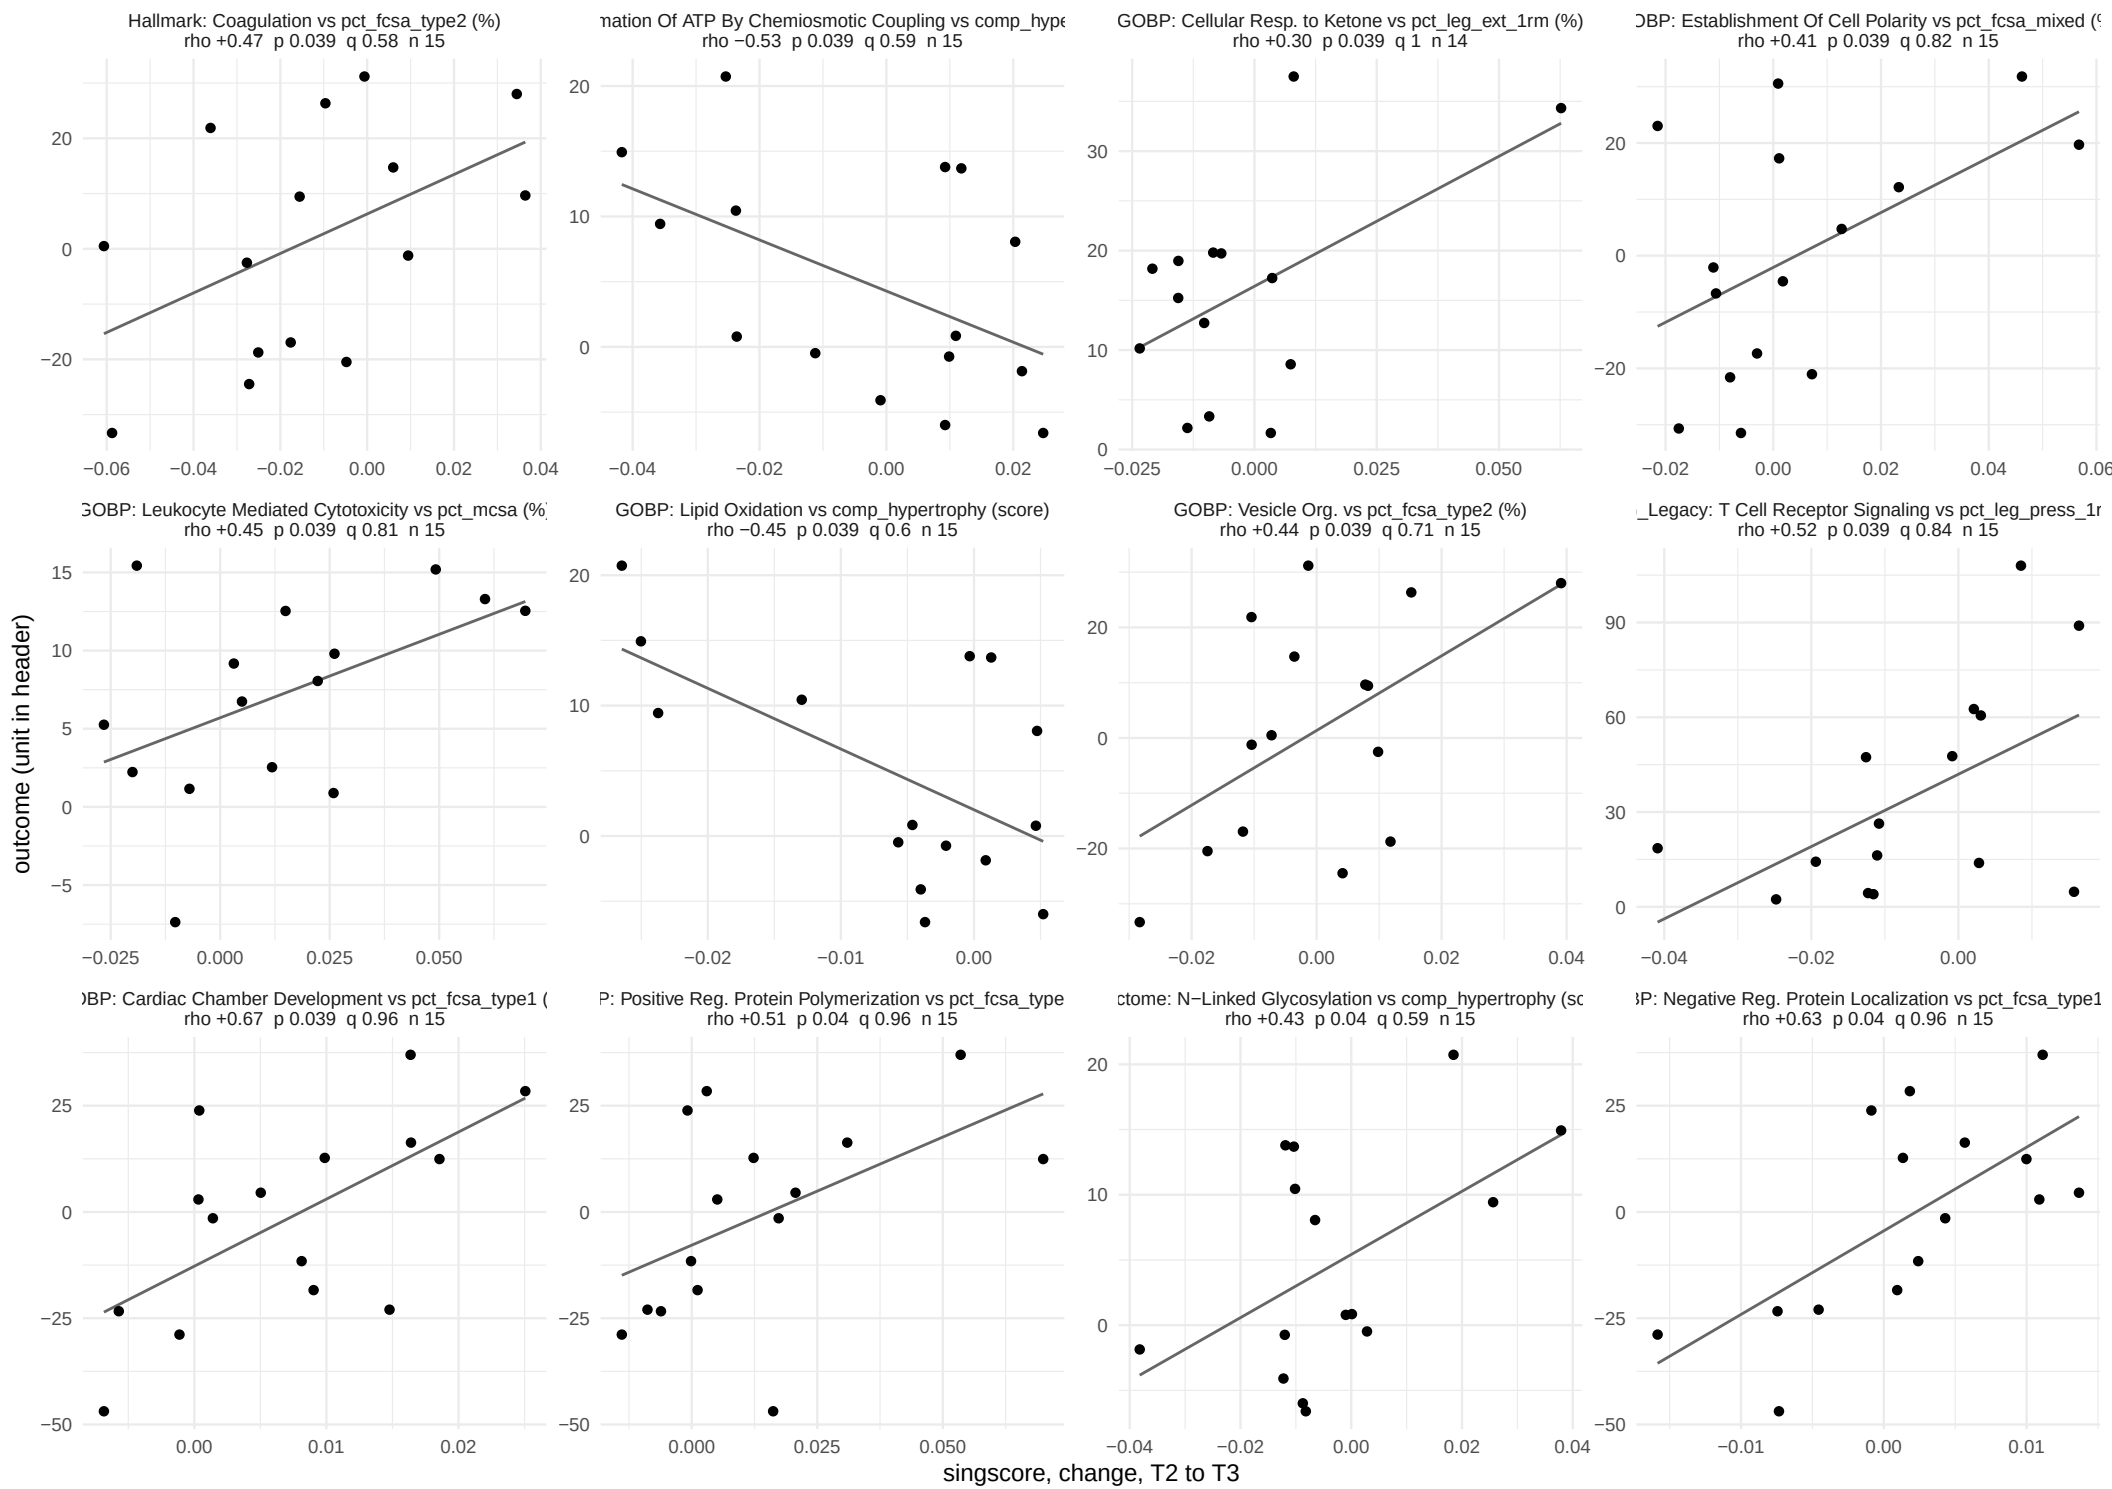

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, acute window


407 of 11024 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 27 of 34.

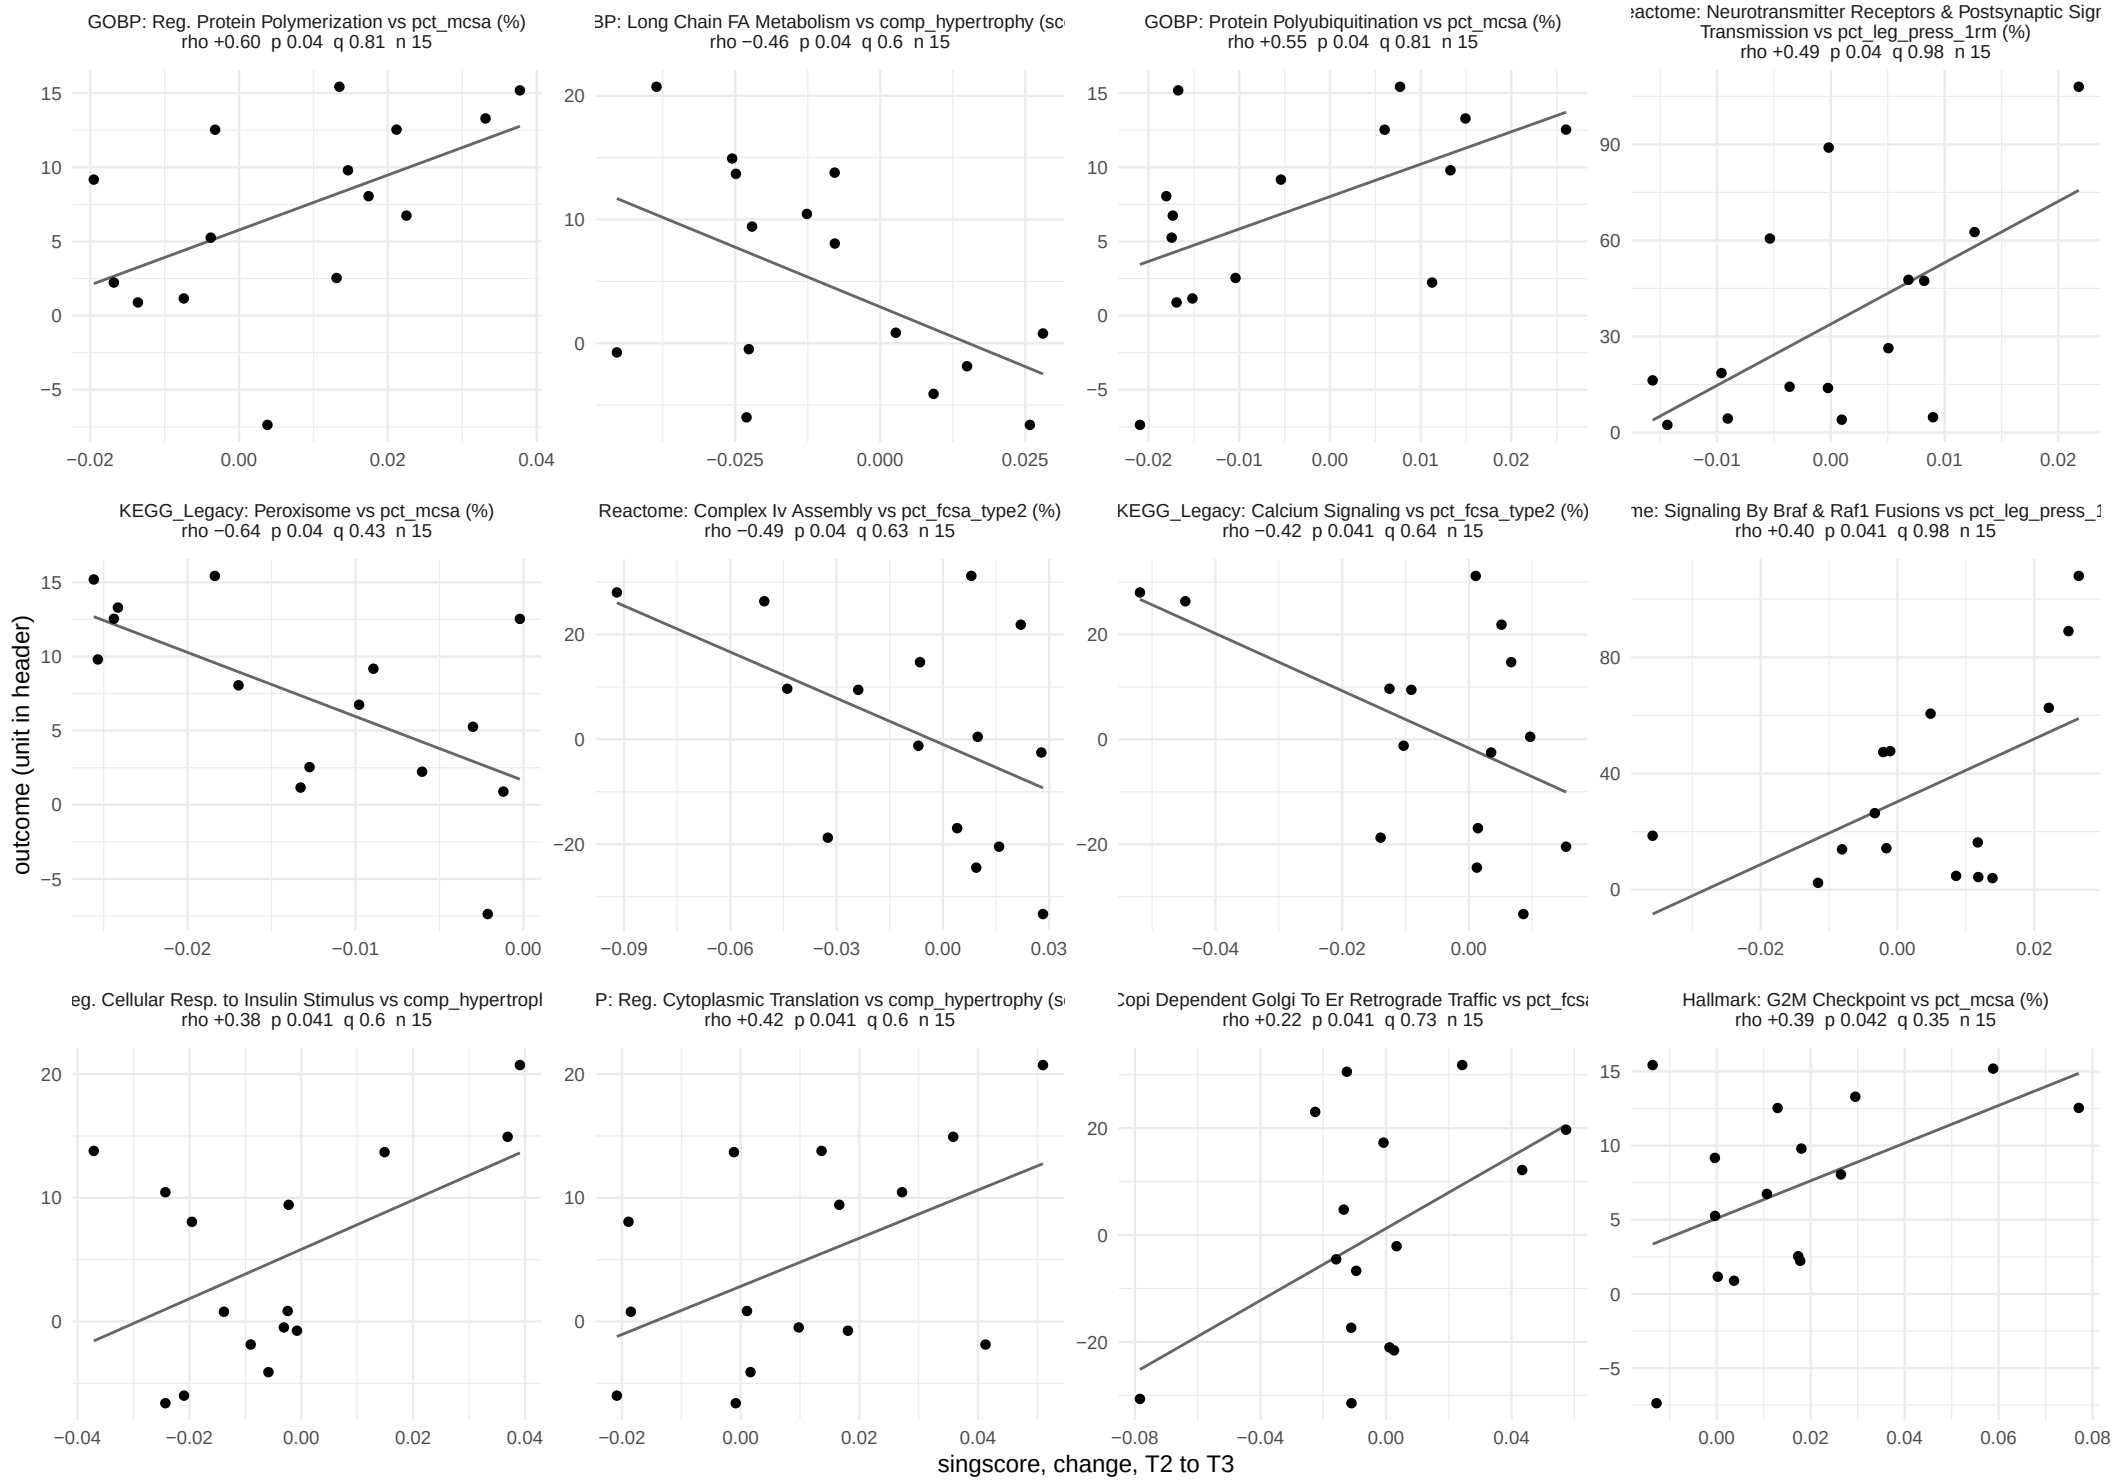

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, acute window


407 of 11024 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 28 of 34.

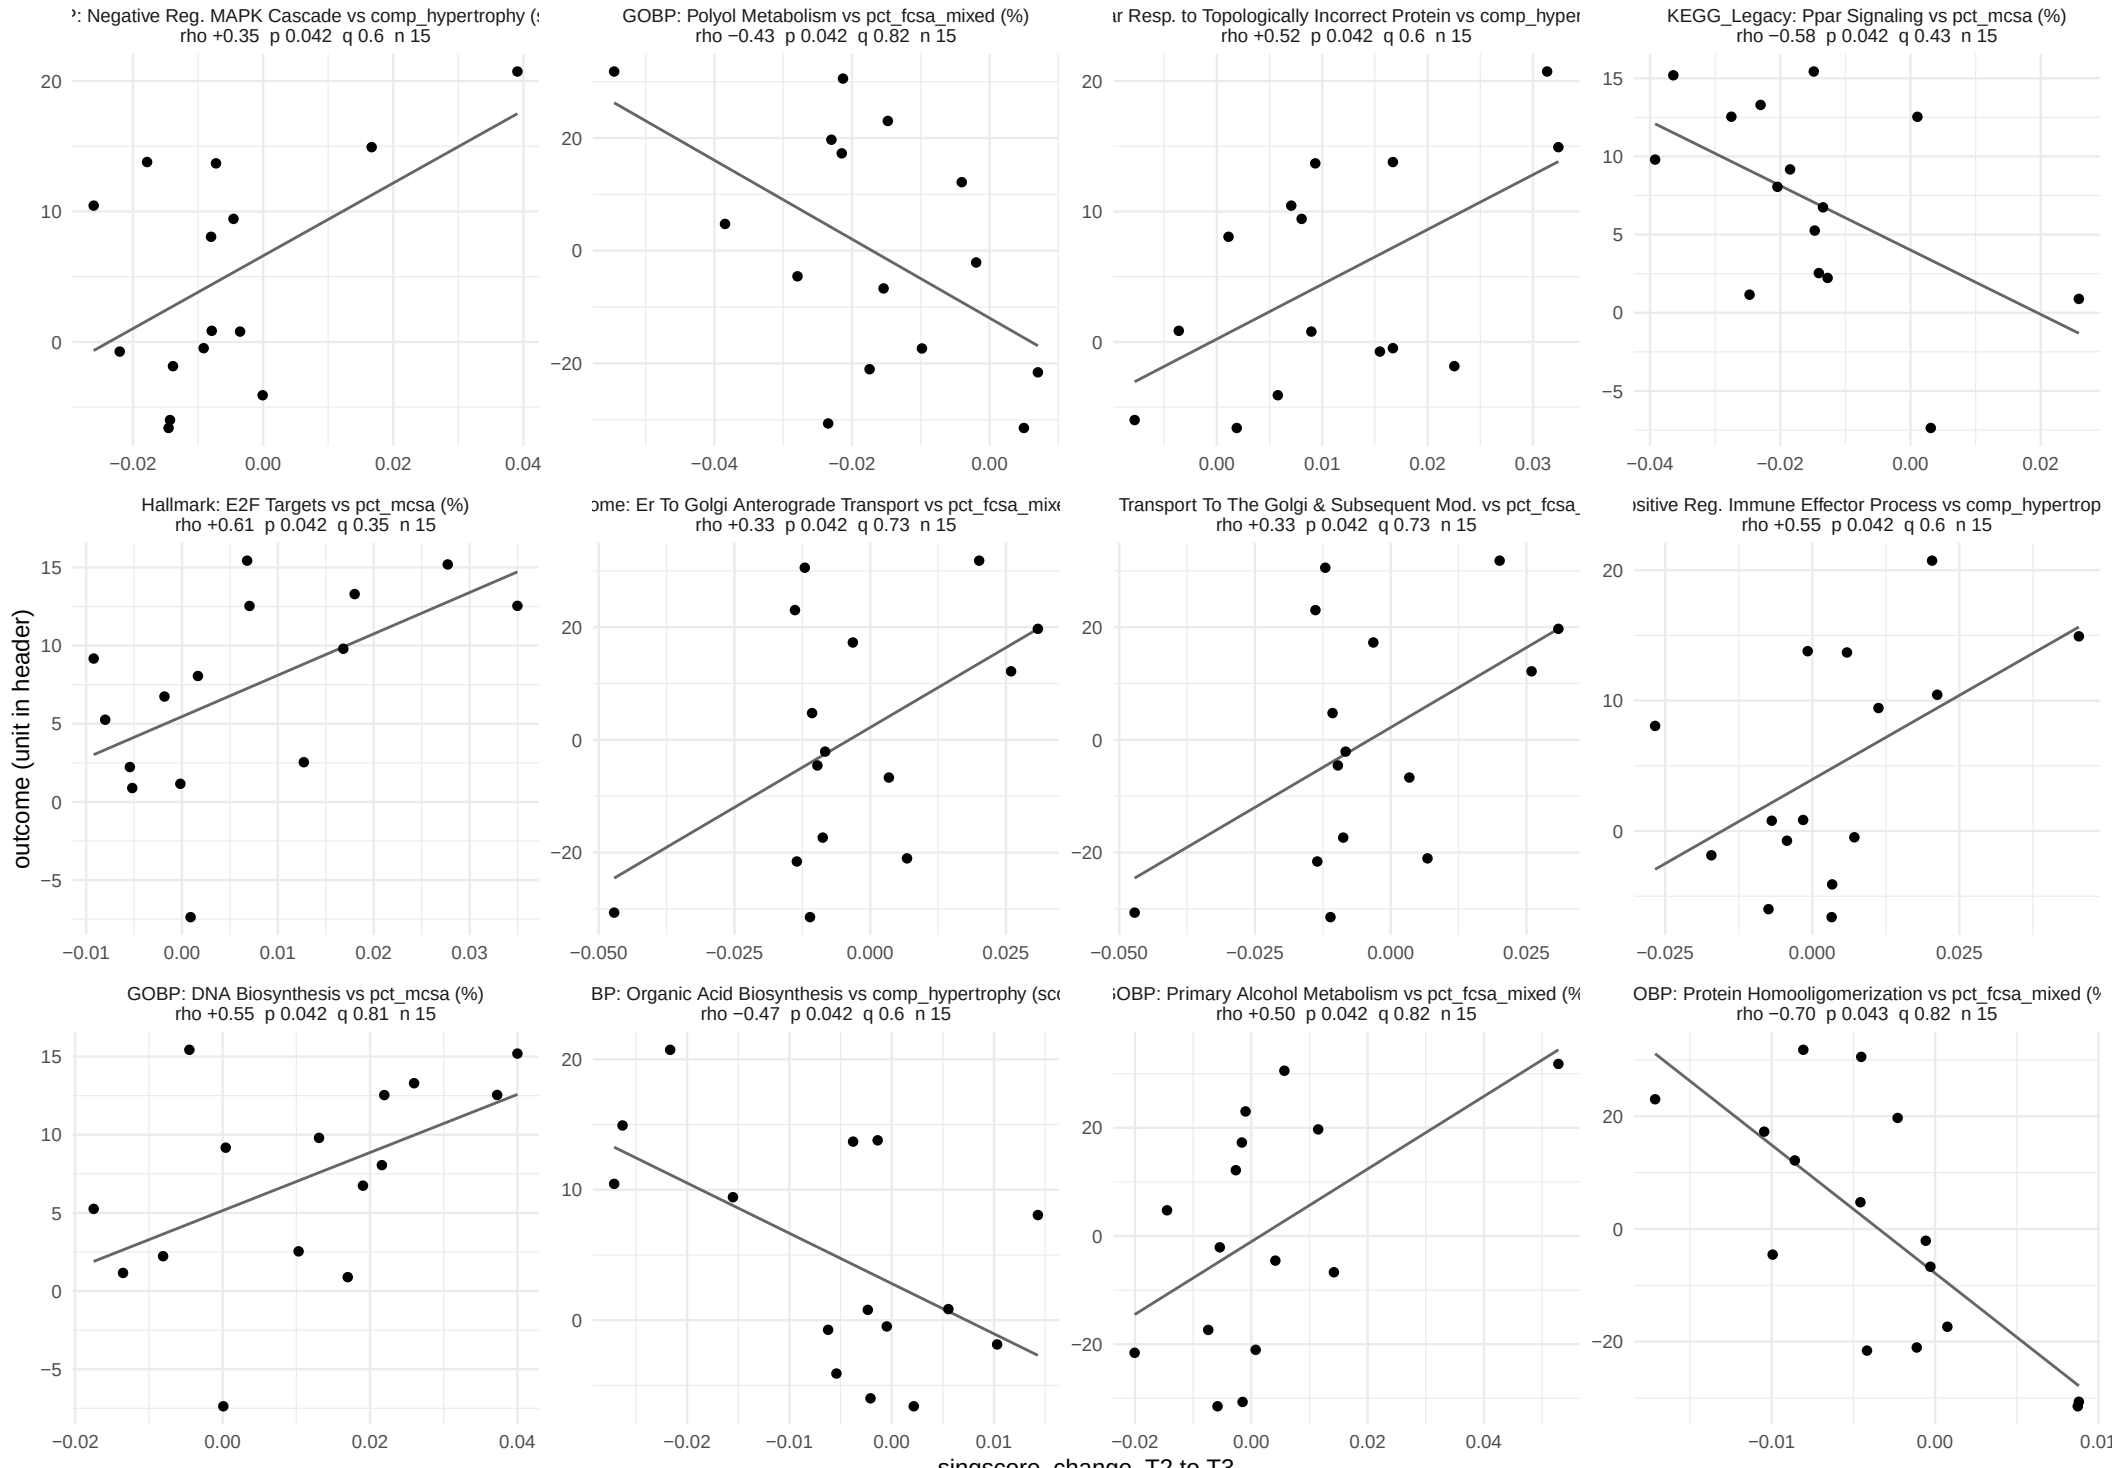

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, acute window


407 of 11024 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 29 of 34.

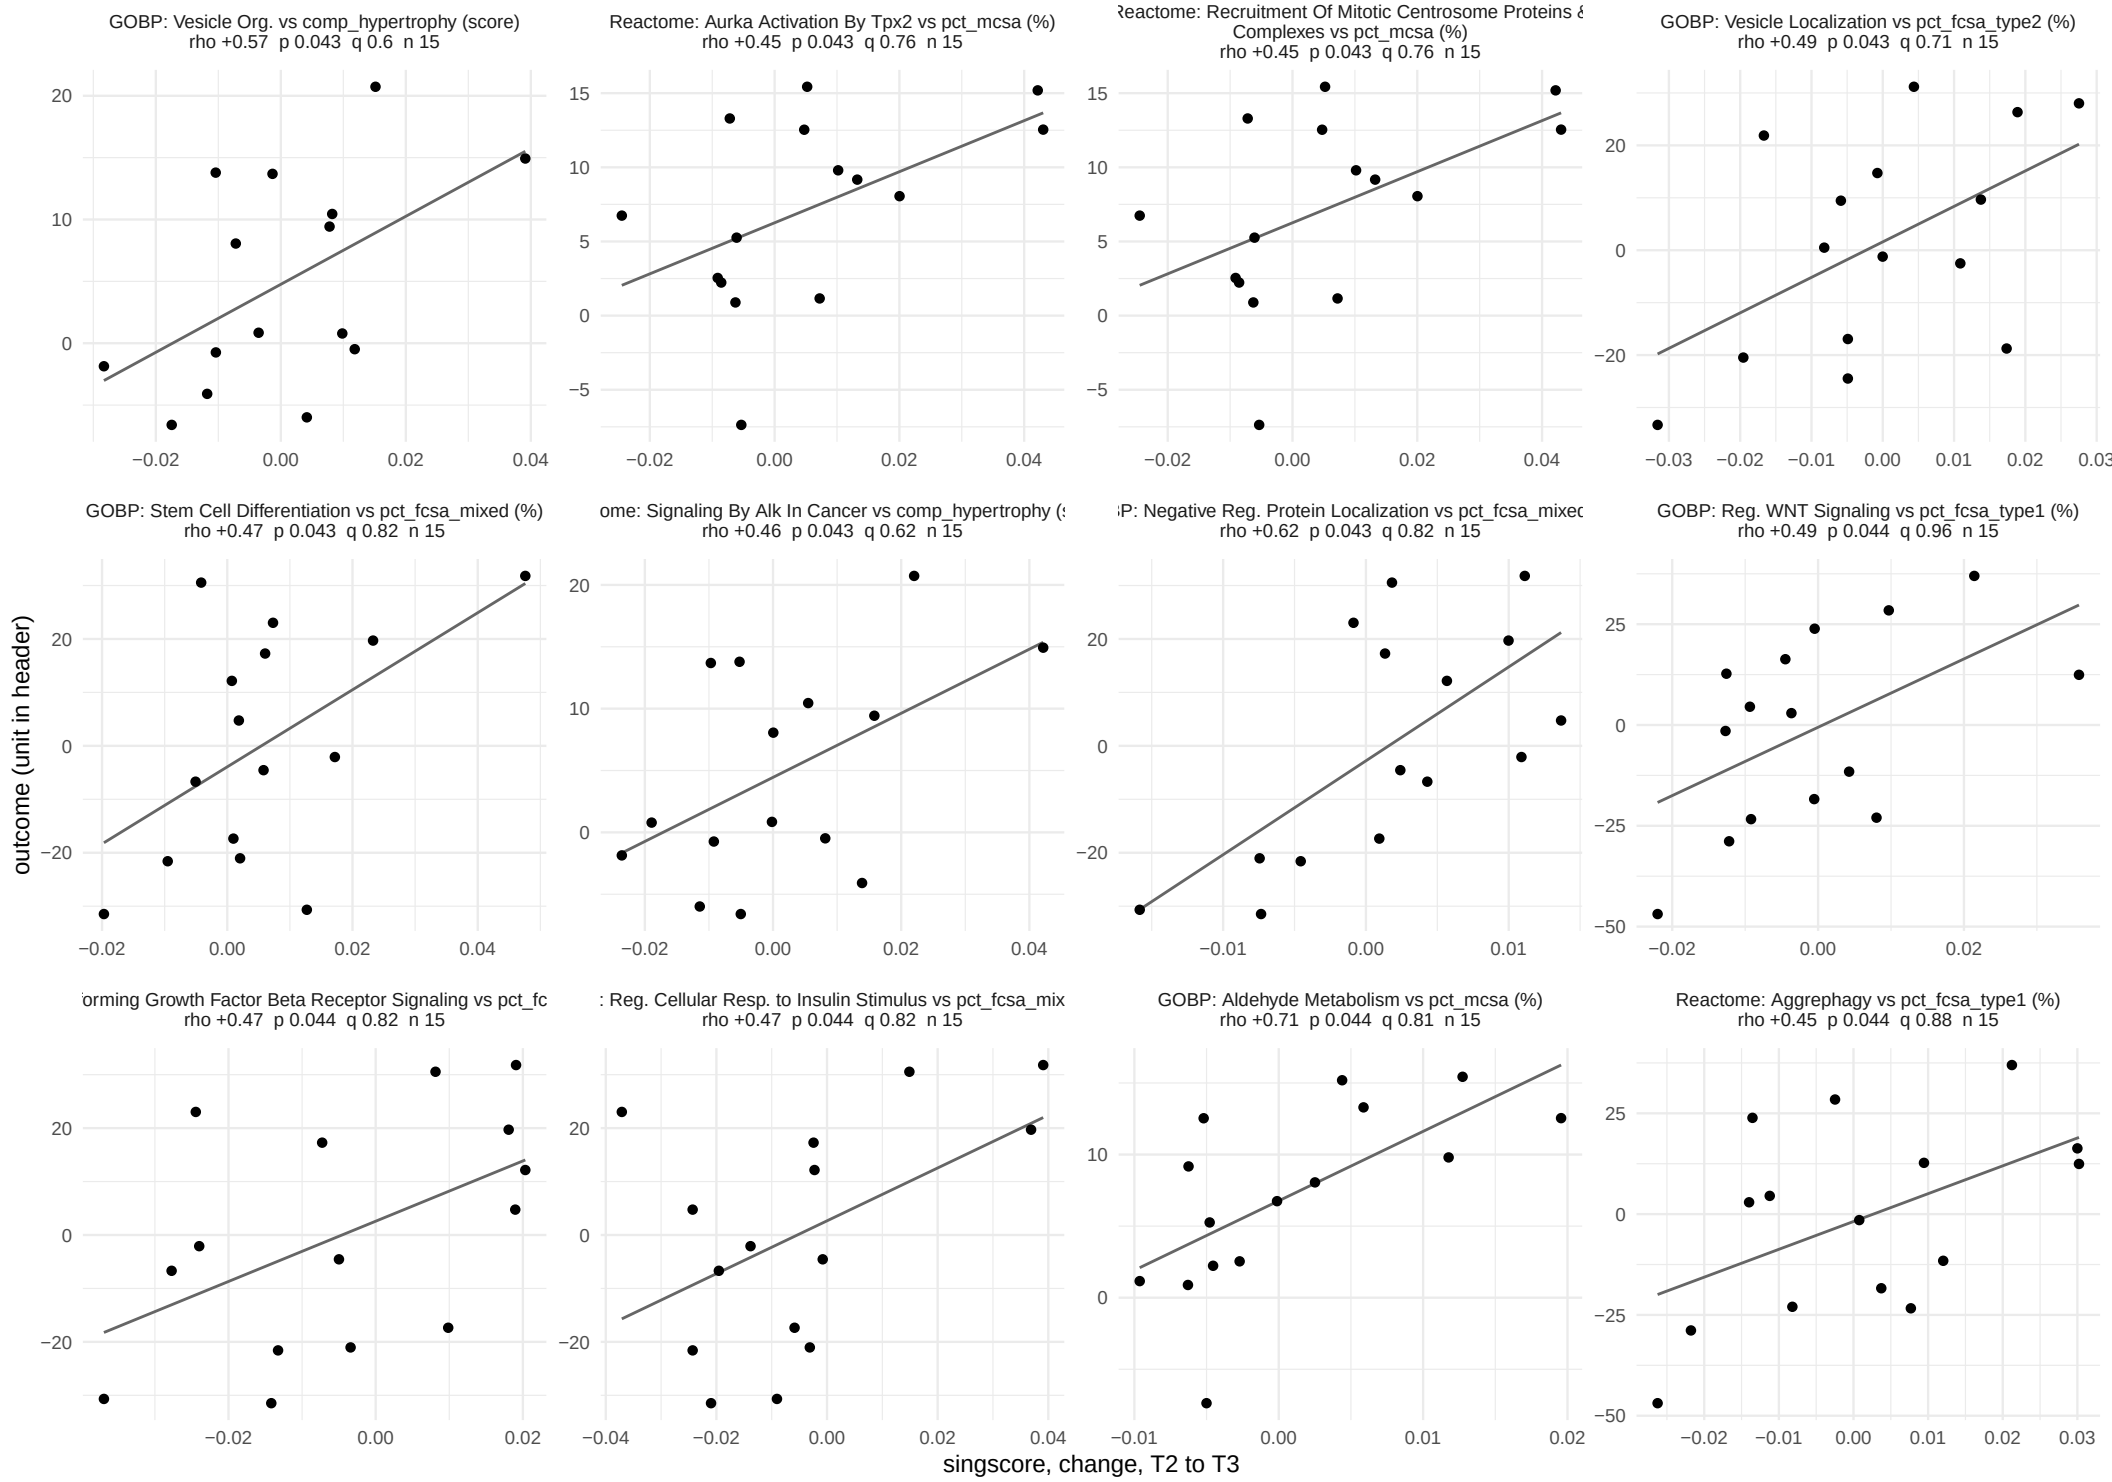

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, acute window


407 of 11024 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 30 of 34.

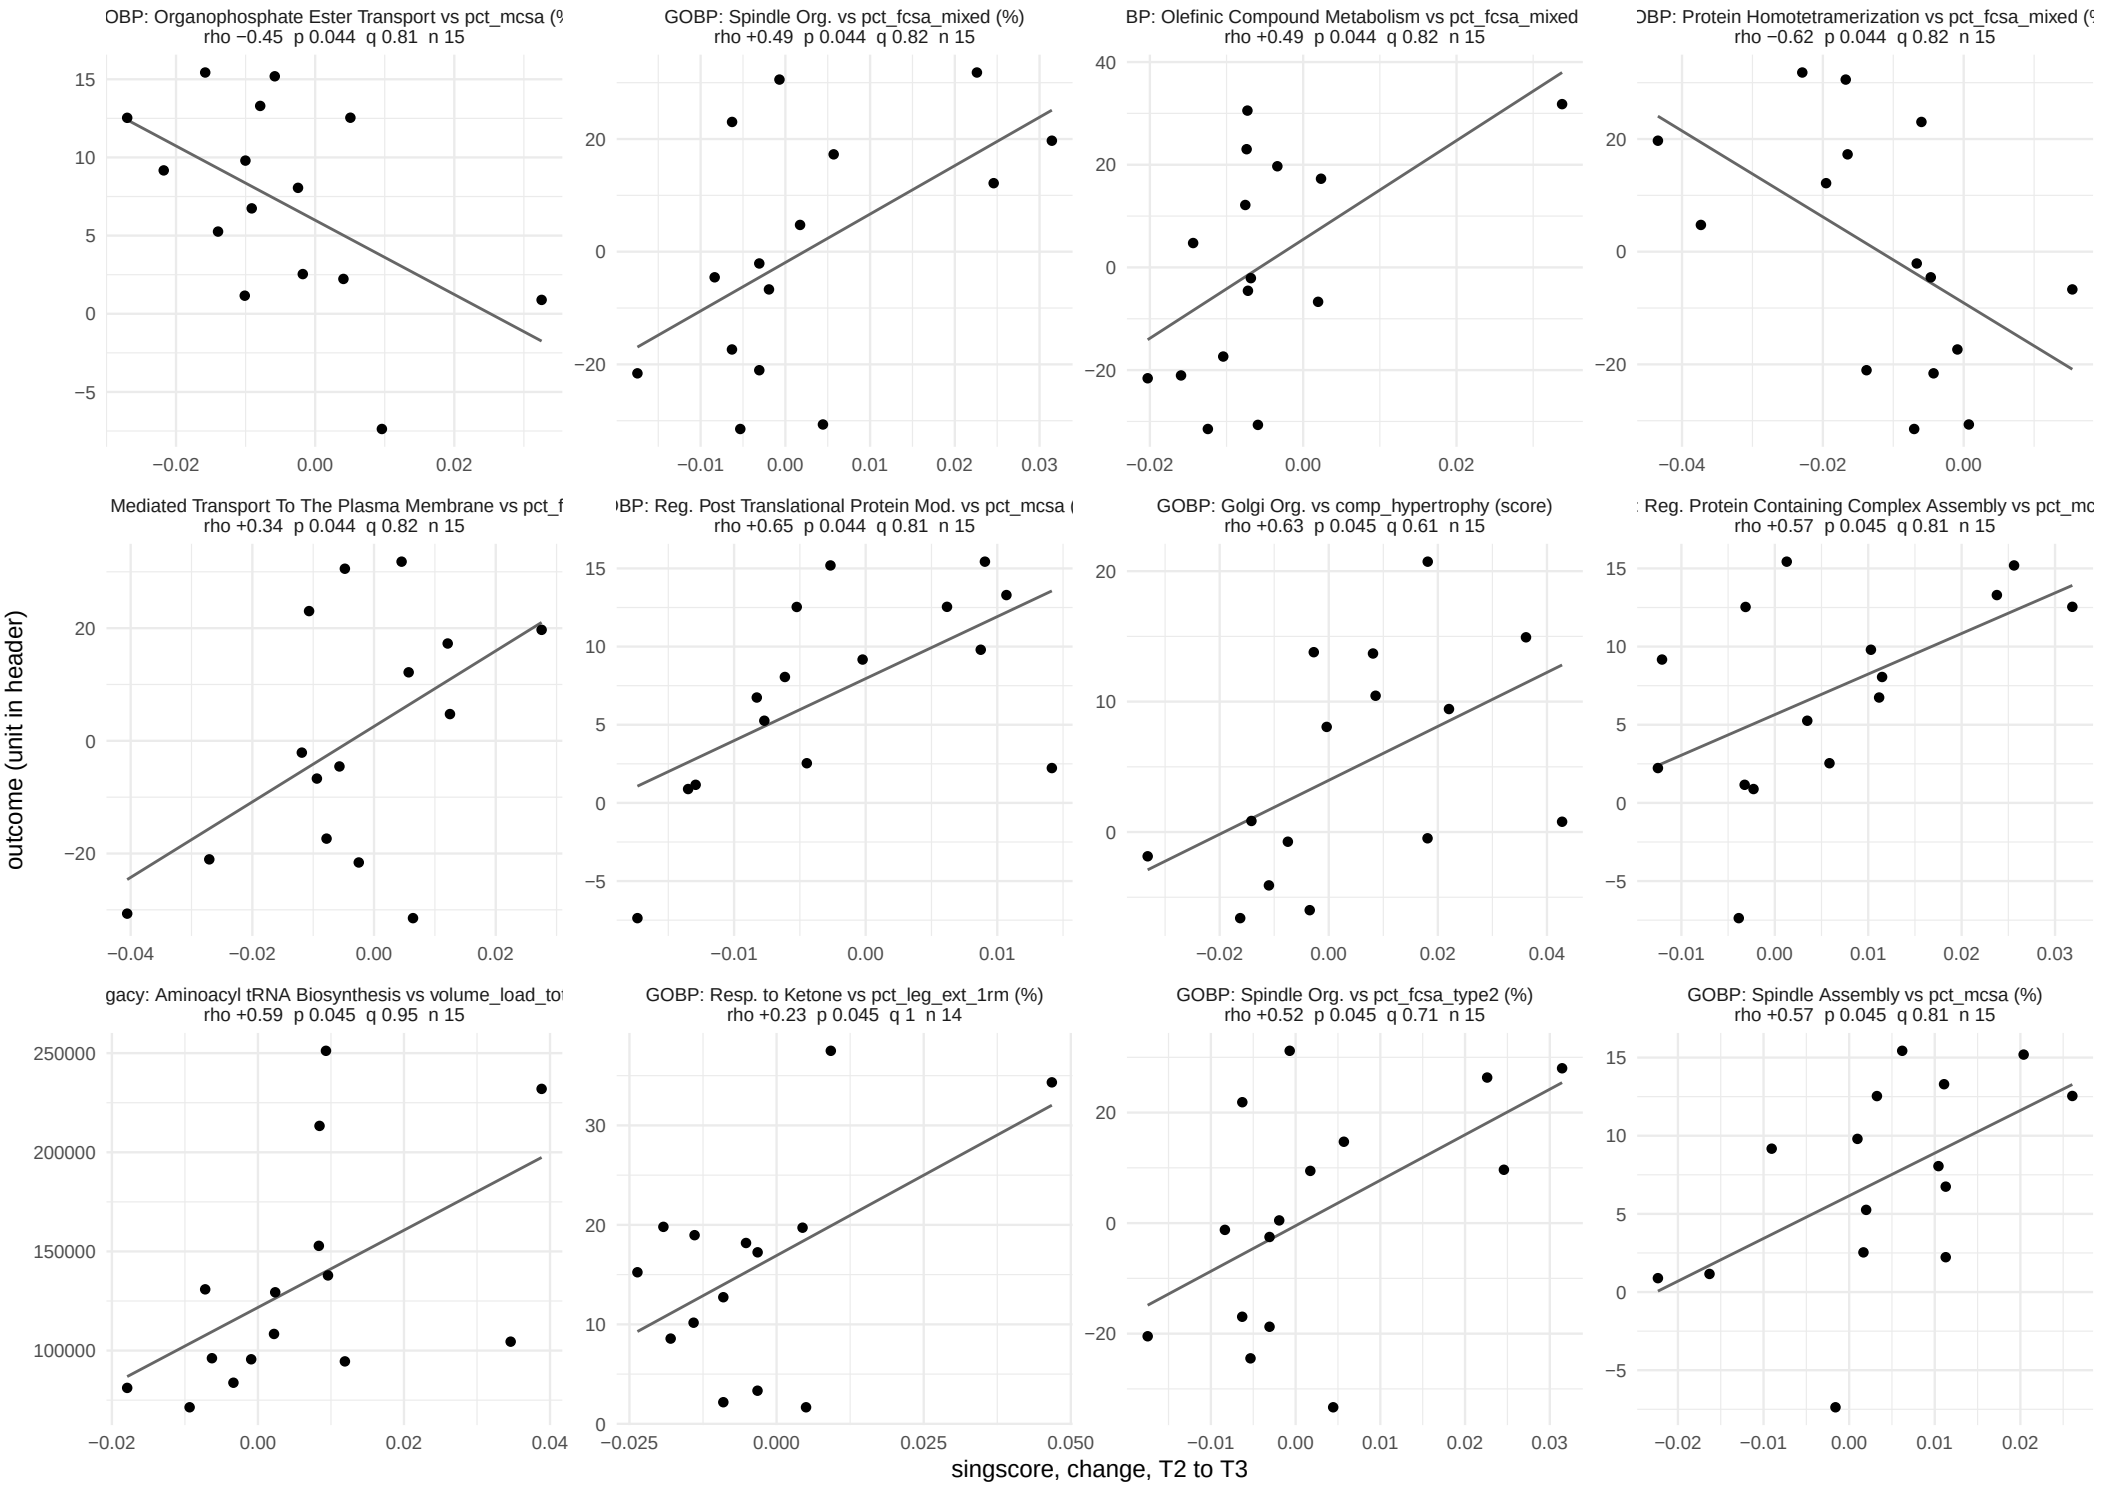

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, acute window


407 of 11024 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 31 of 34.

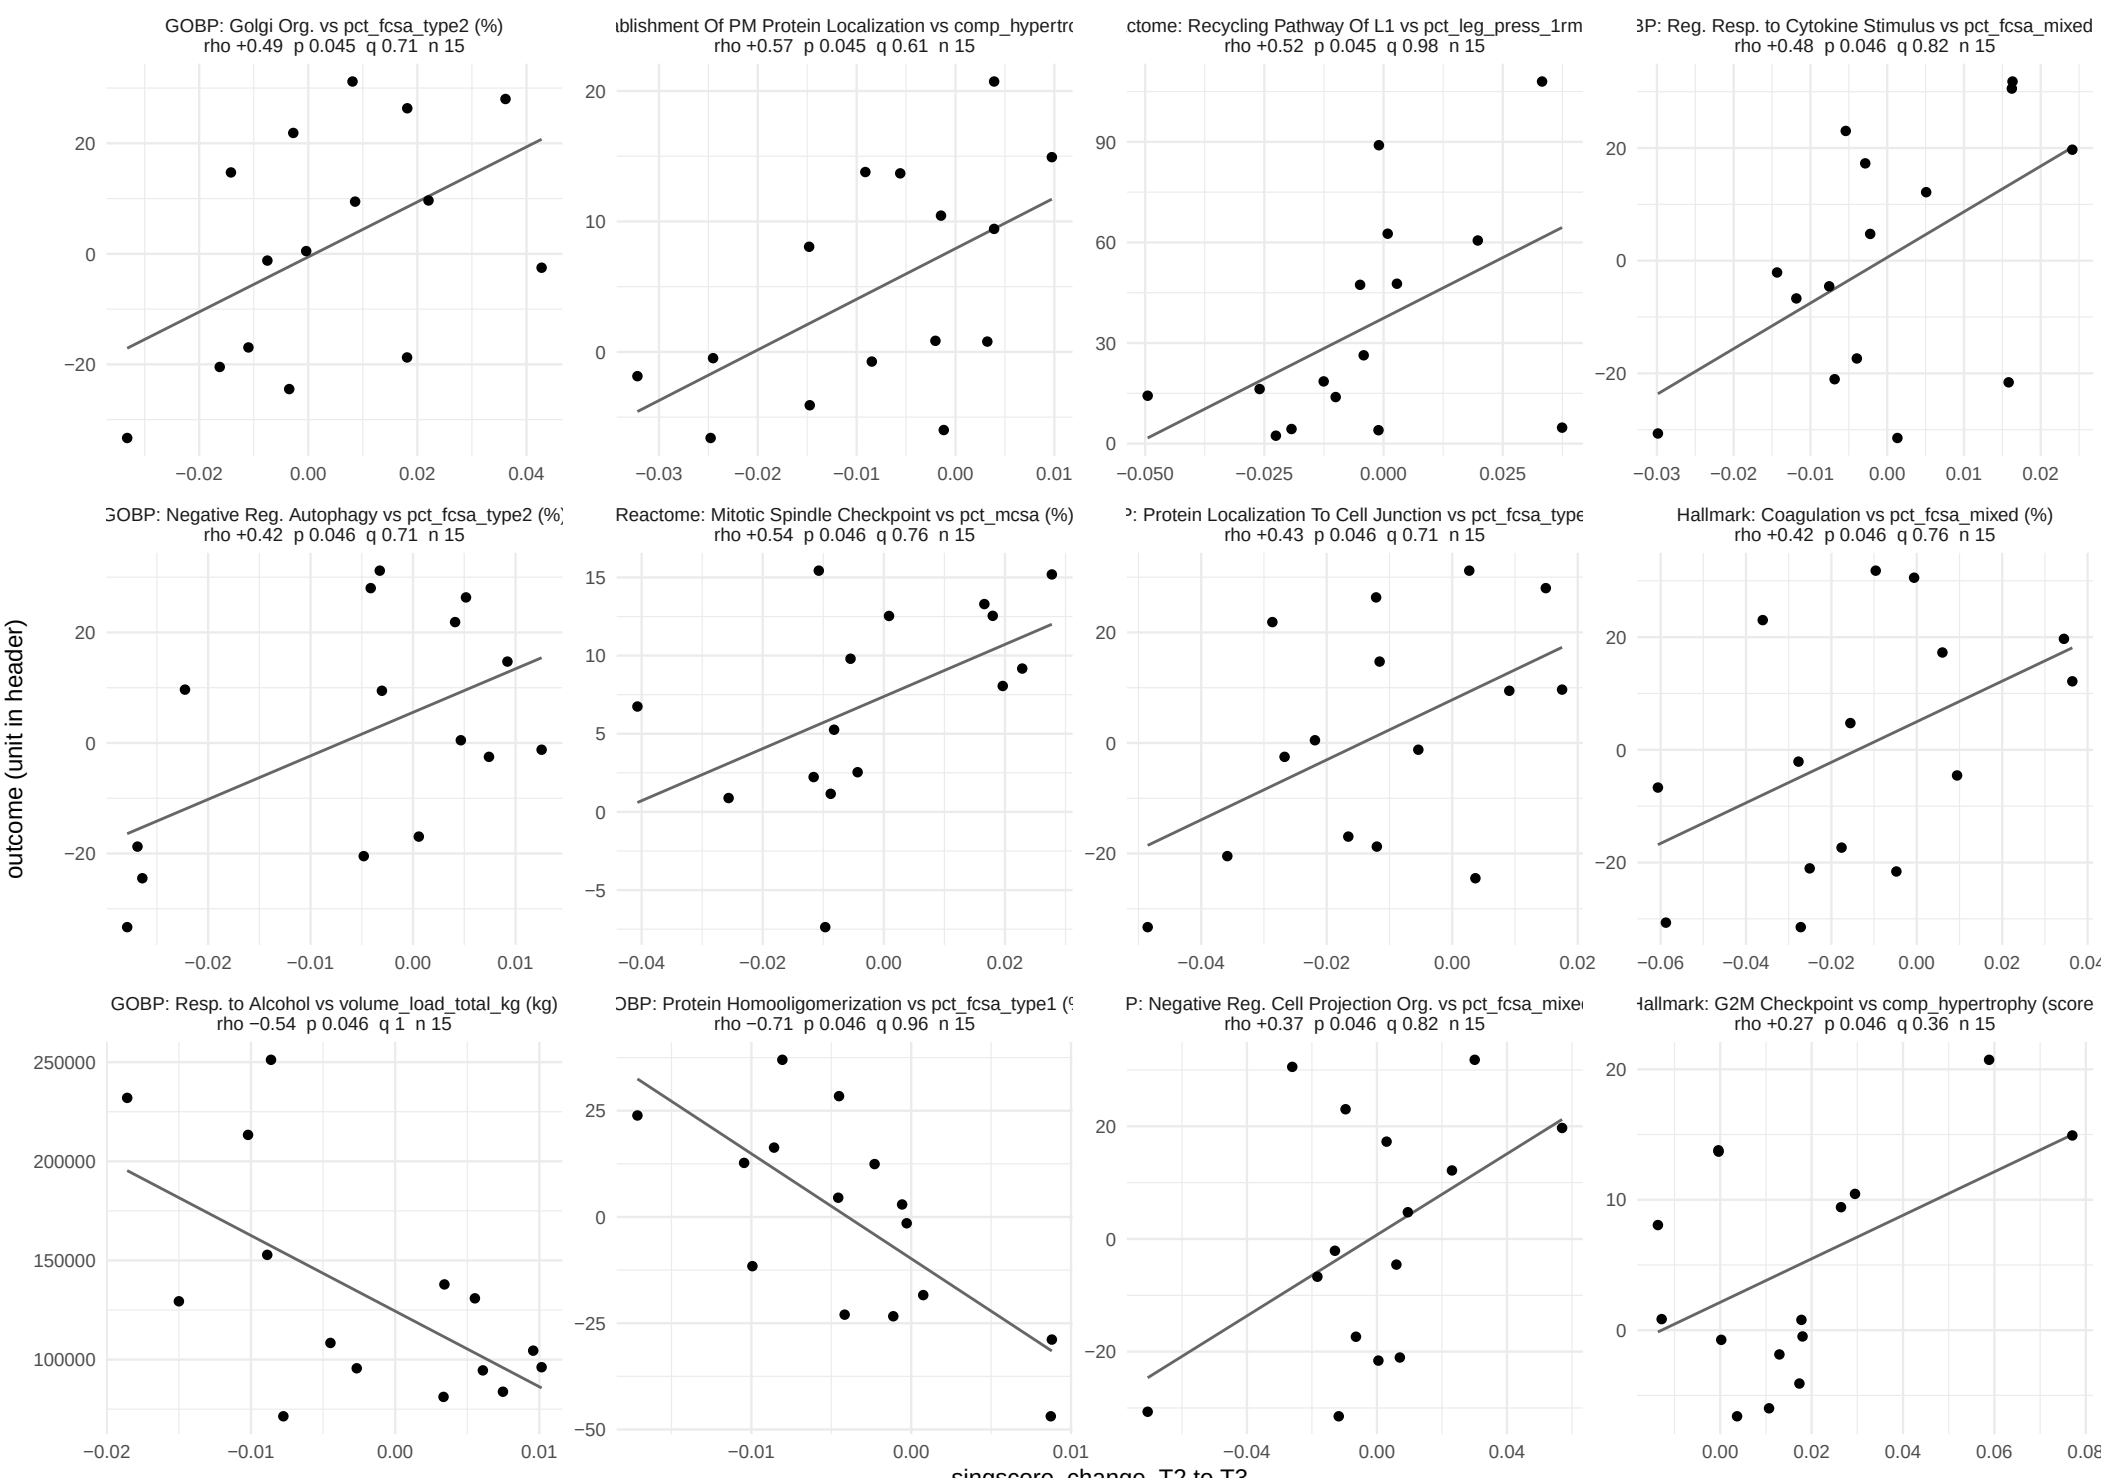

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, acute window


407 of 11024 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 32 of 34.

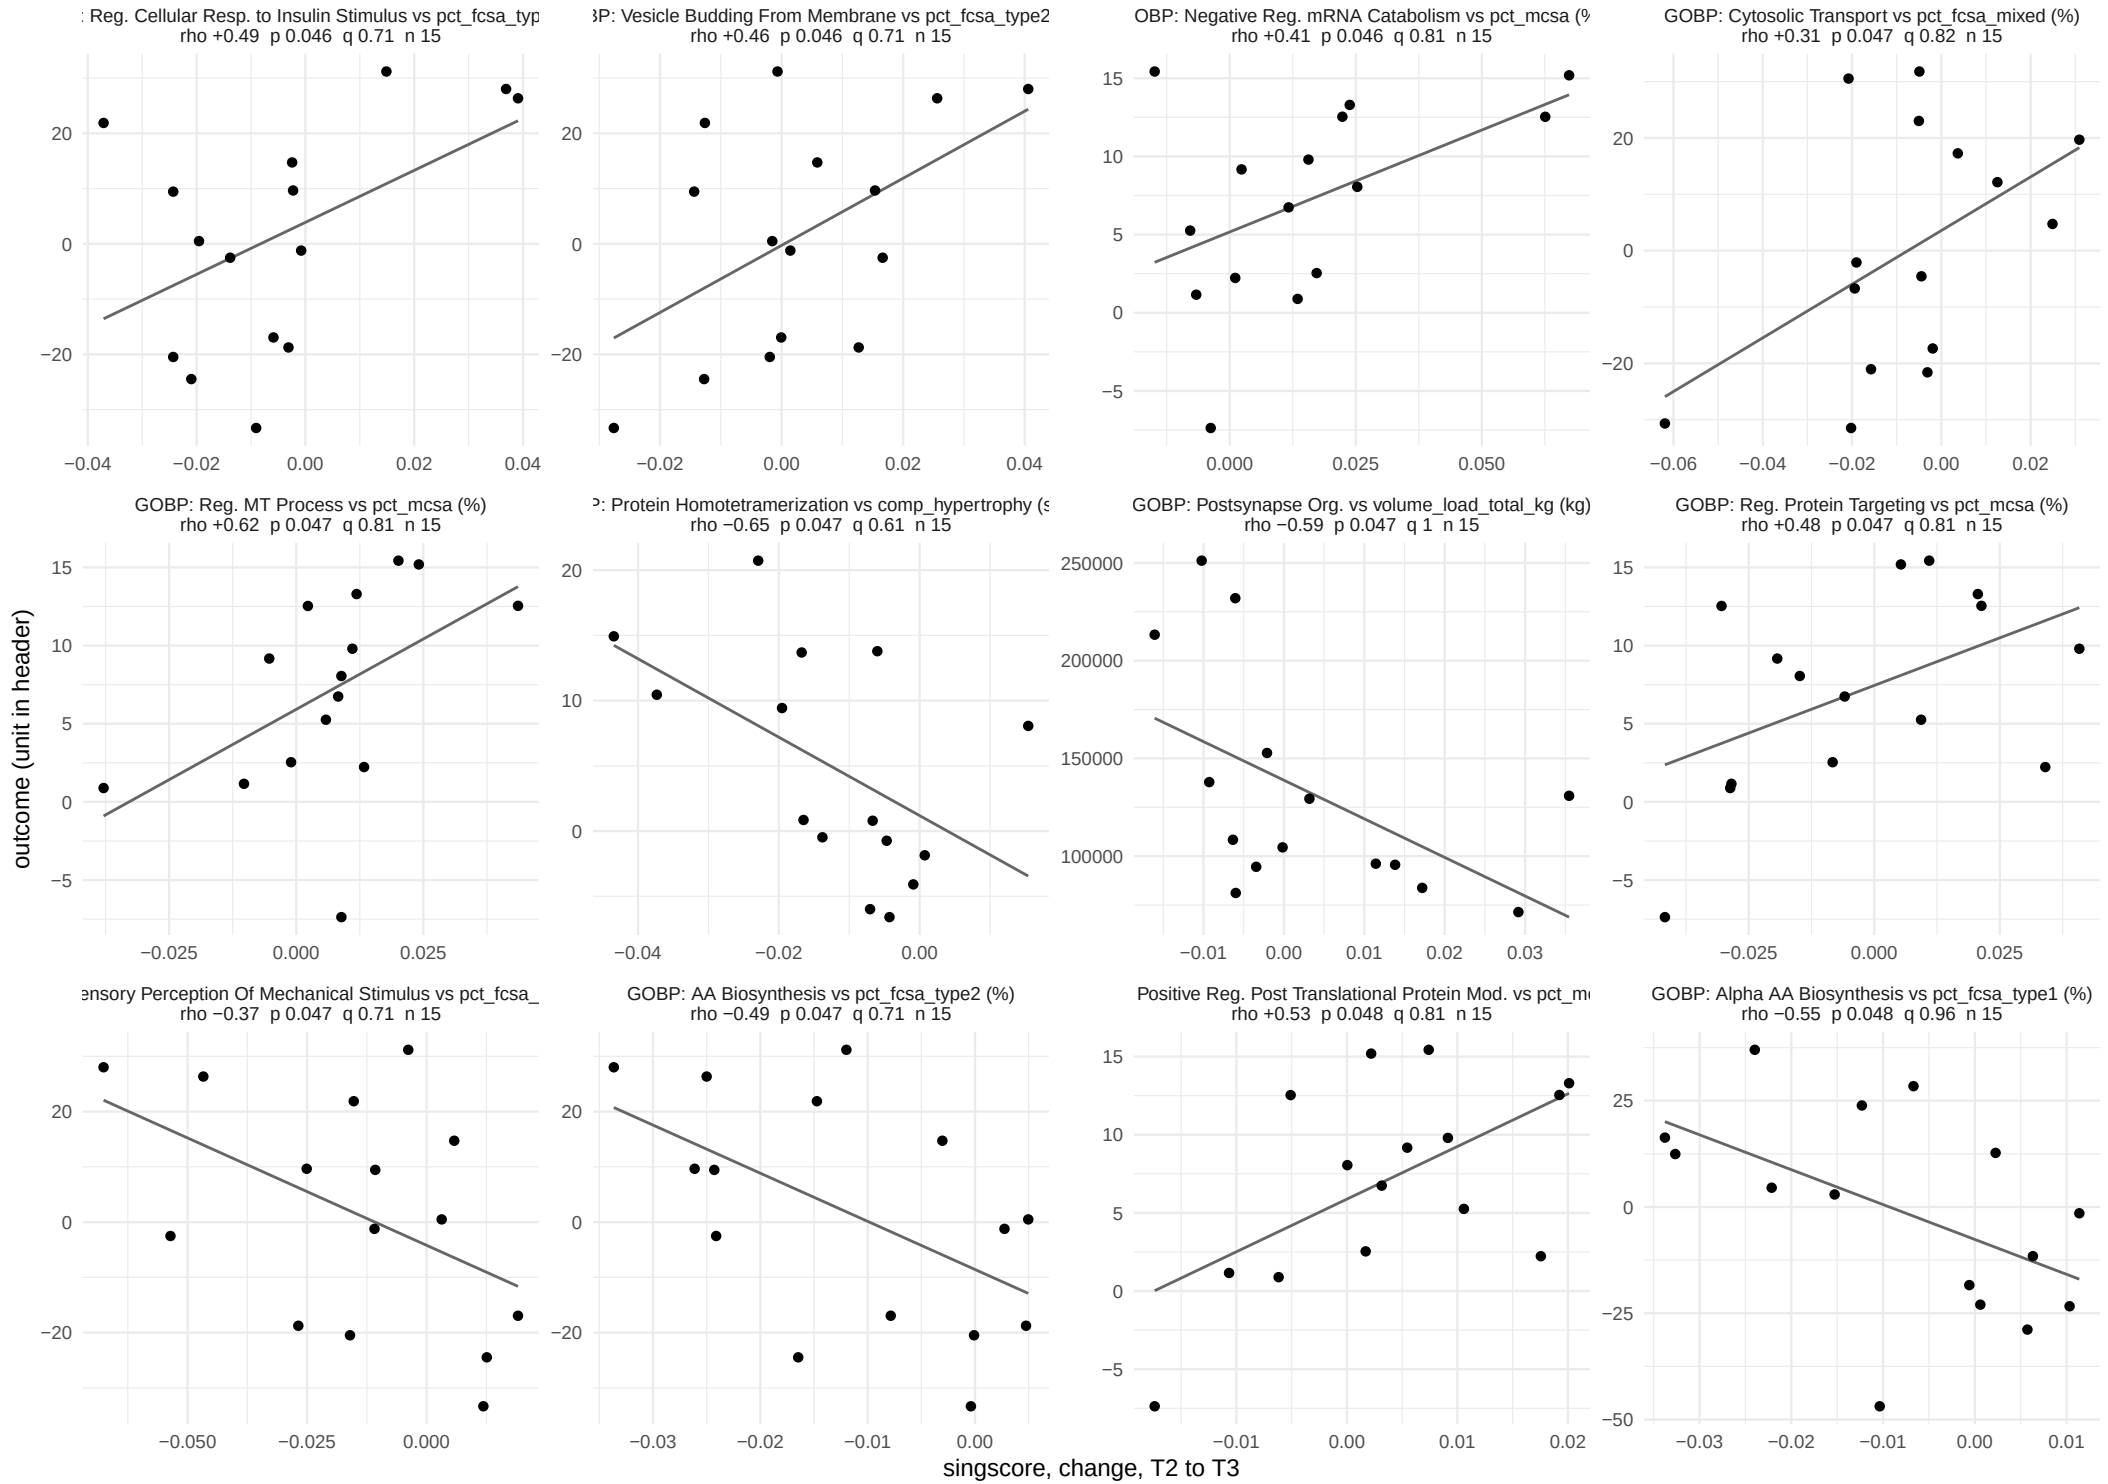

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, acute window


407 of 11024 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 33 of 34.

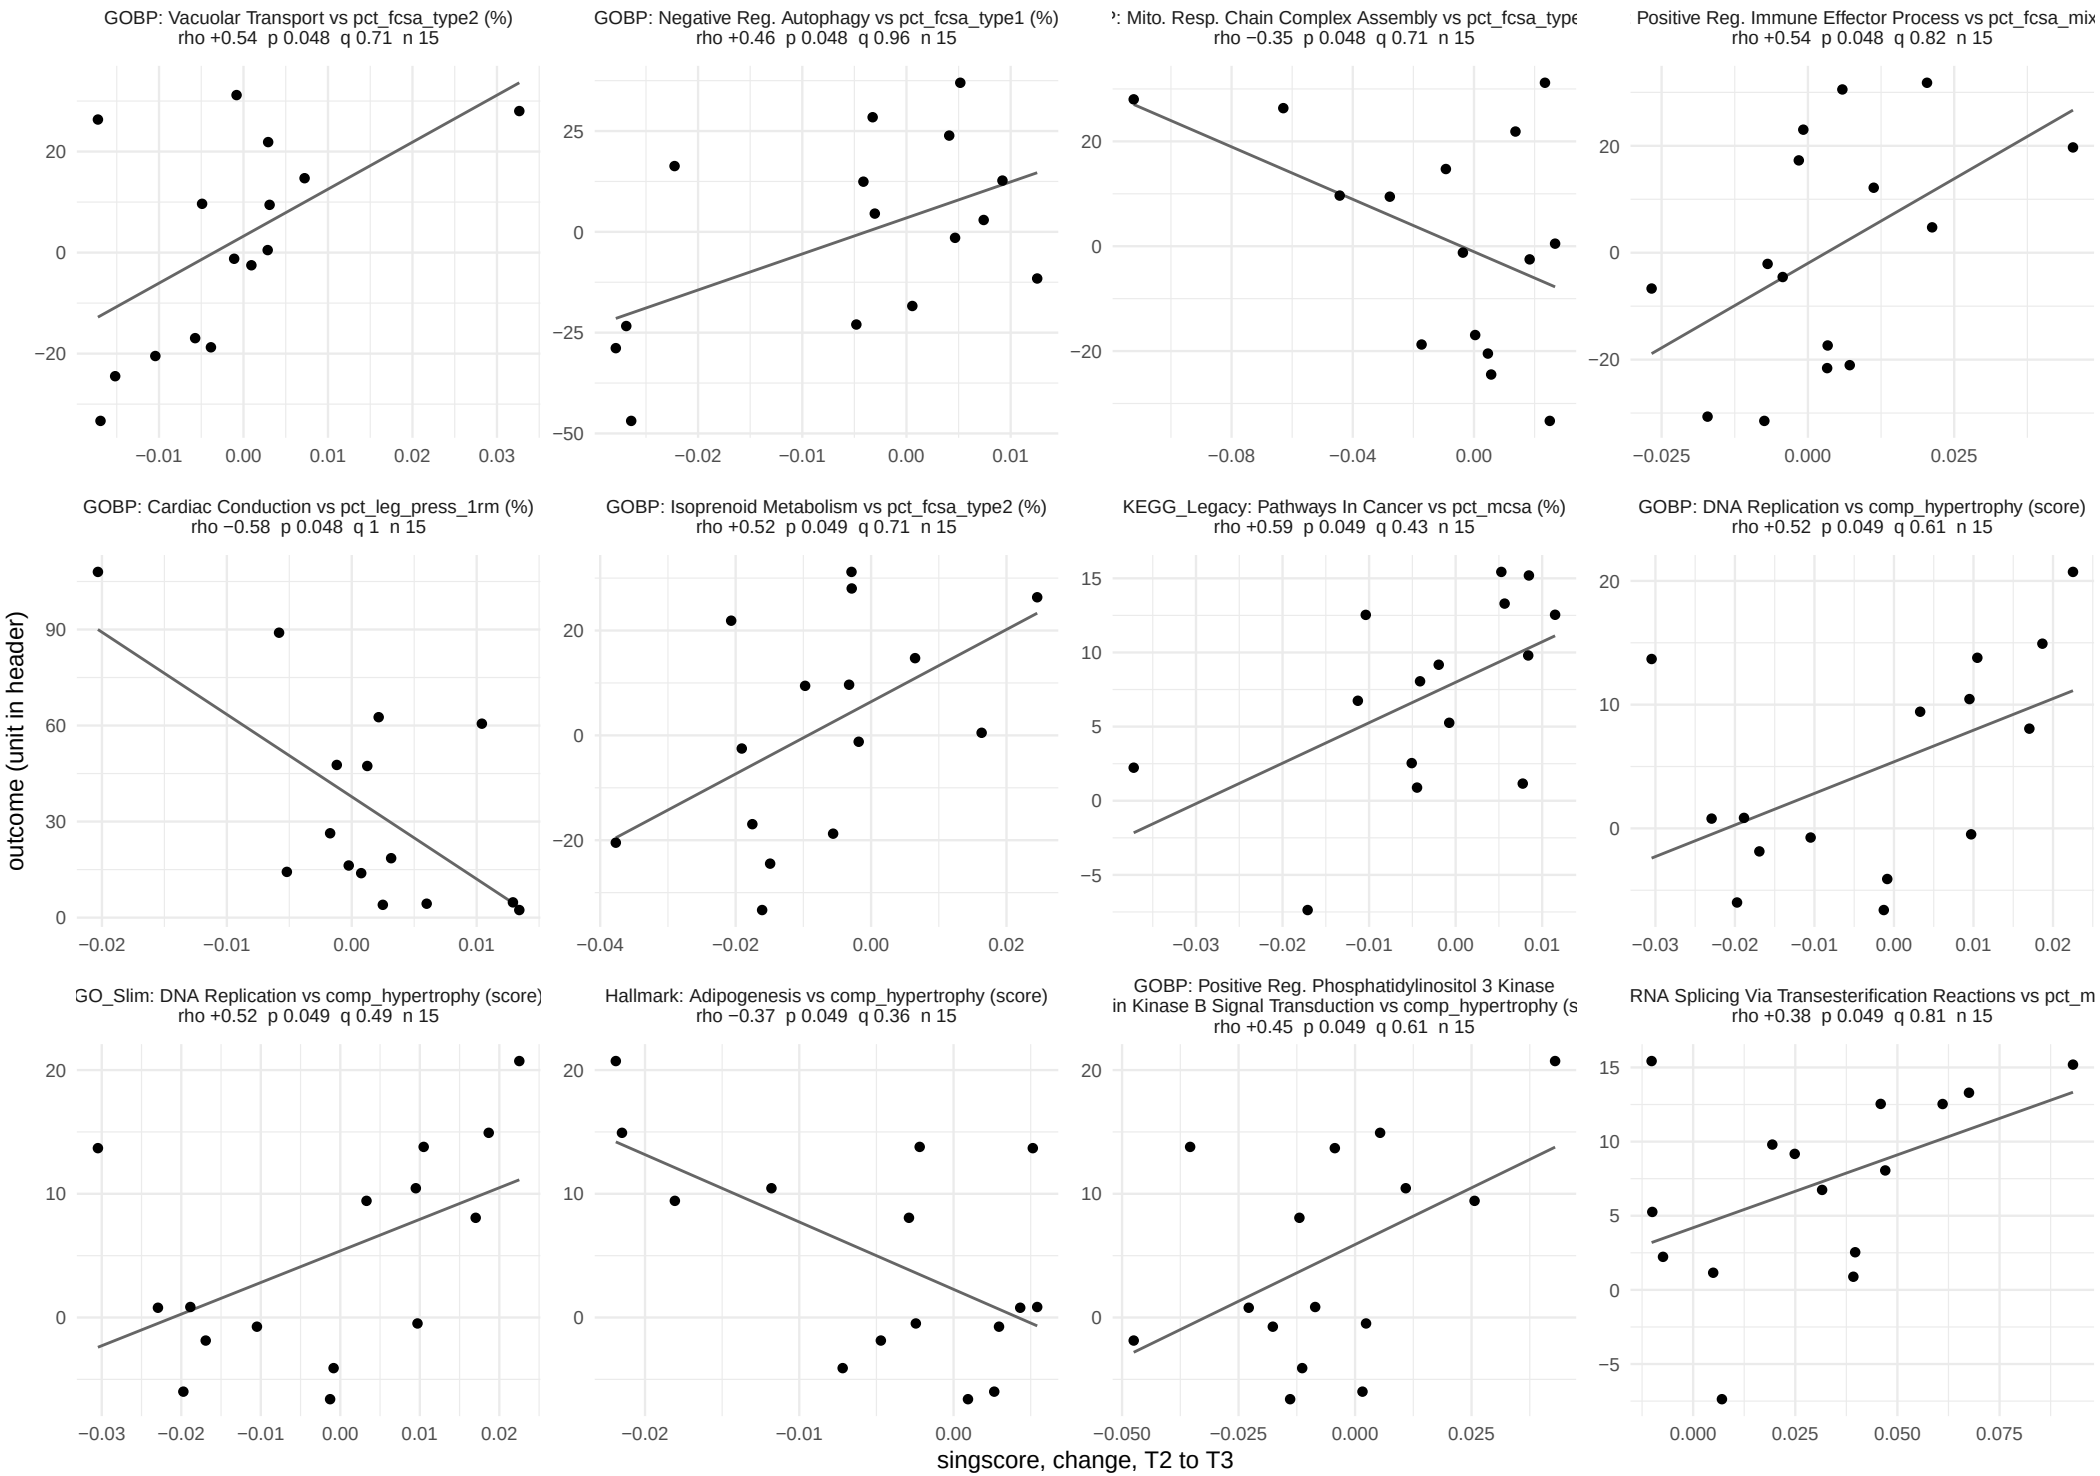

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, acute window


407 of 11024 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 34 of 34.

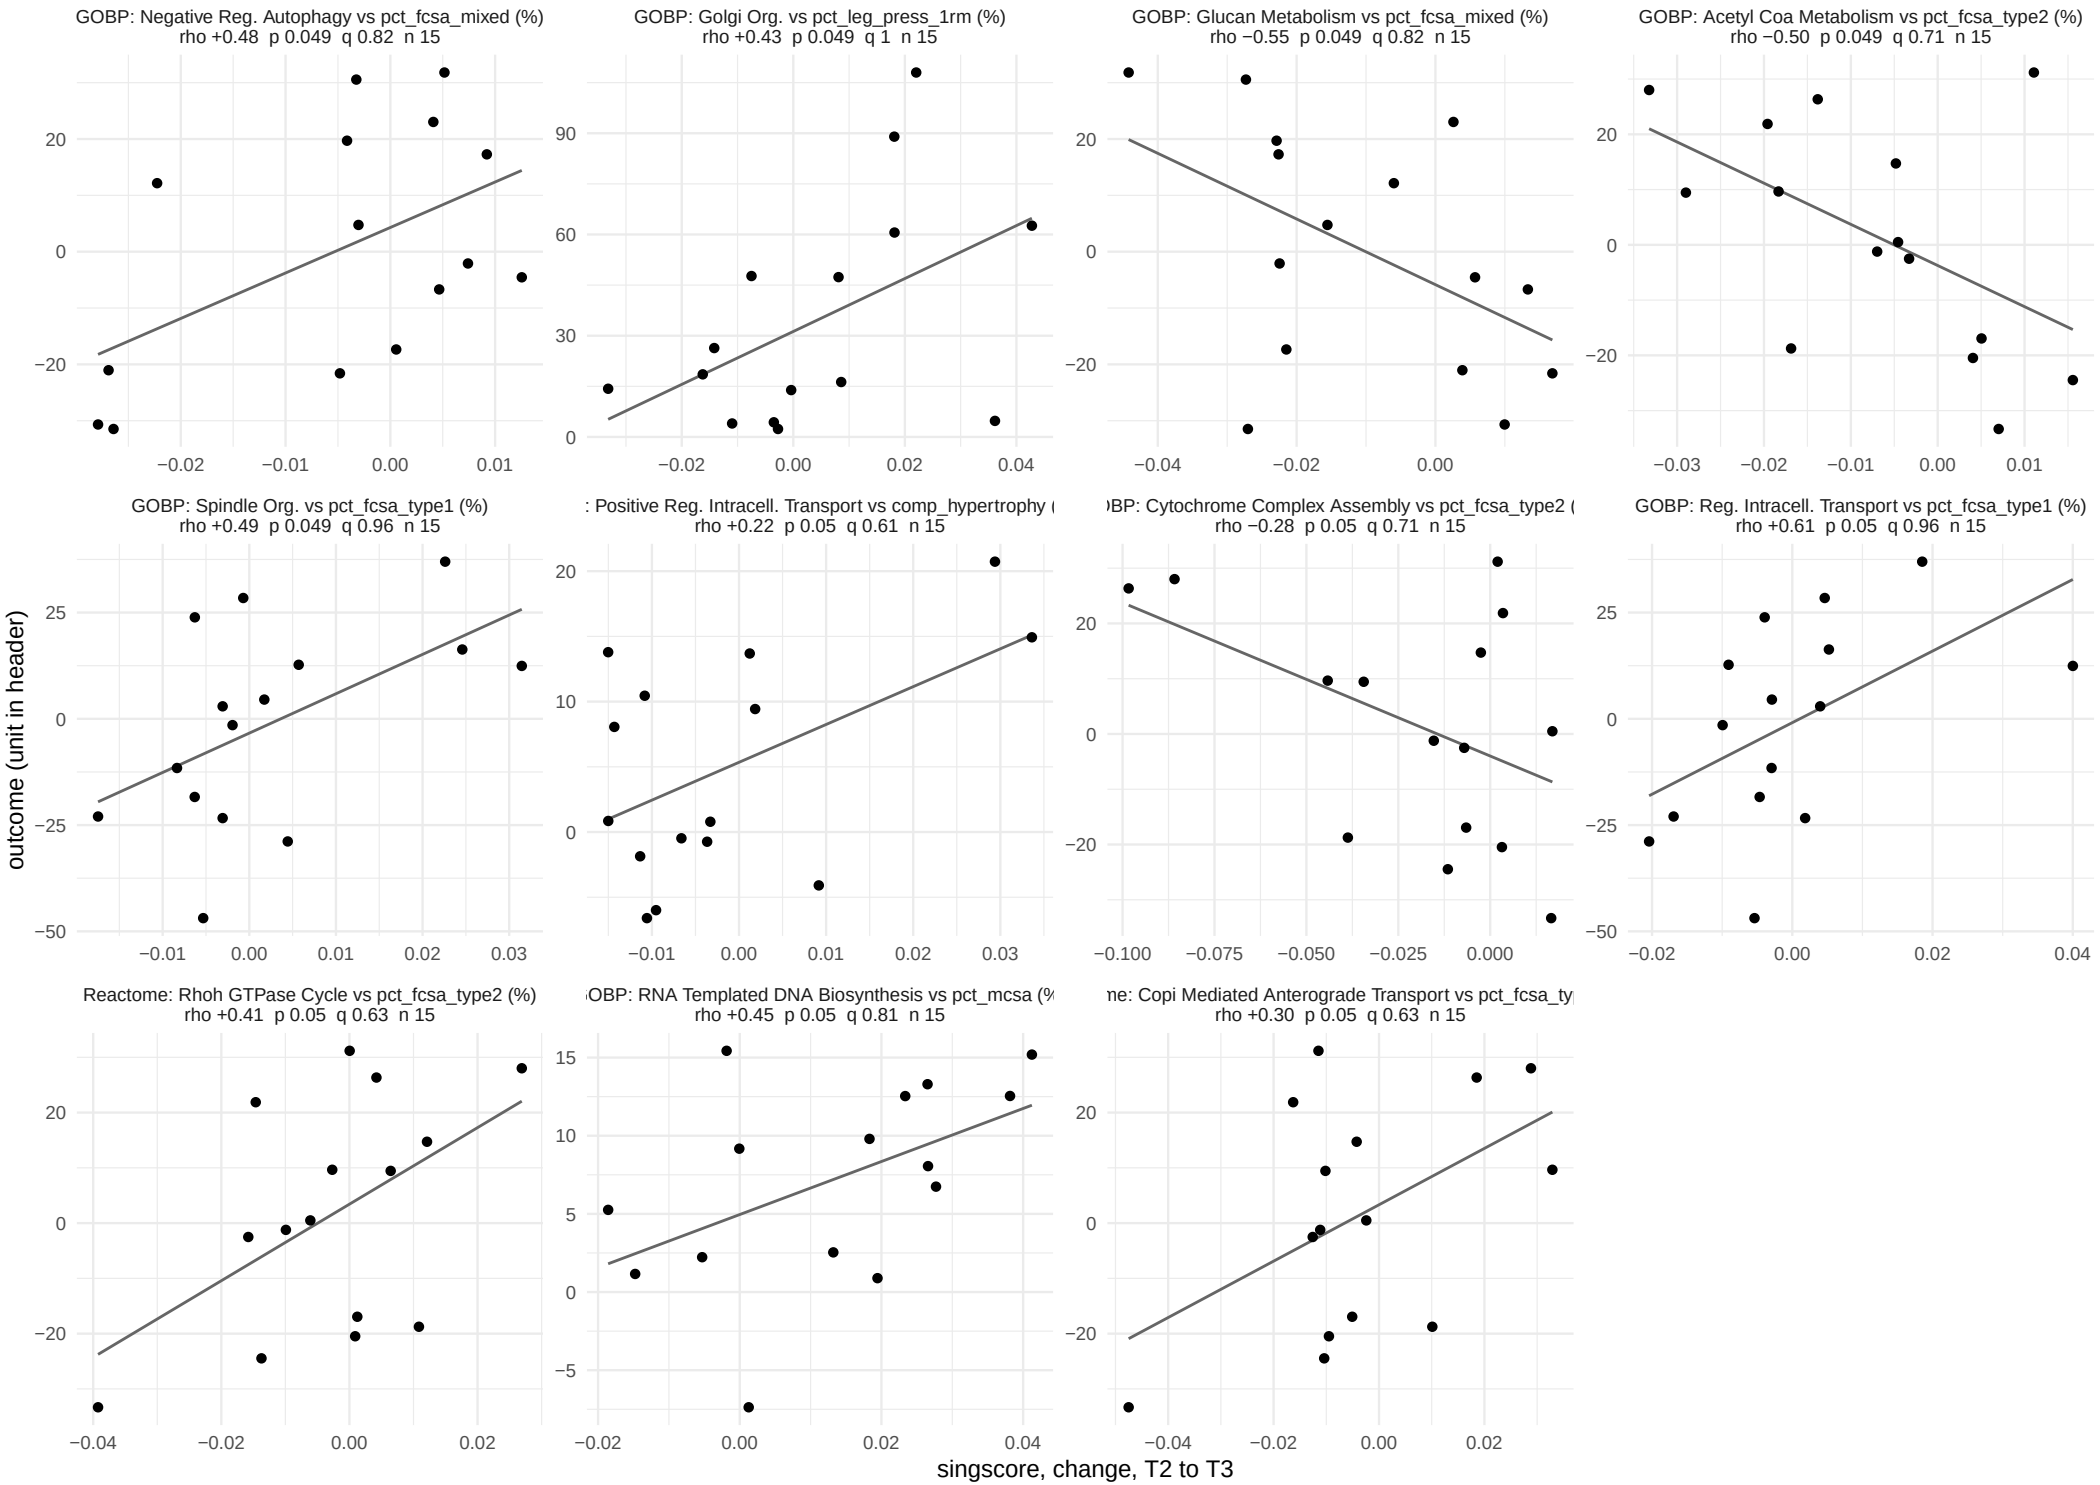

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, baseline_level window


673 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 1 of 57.

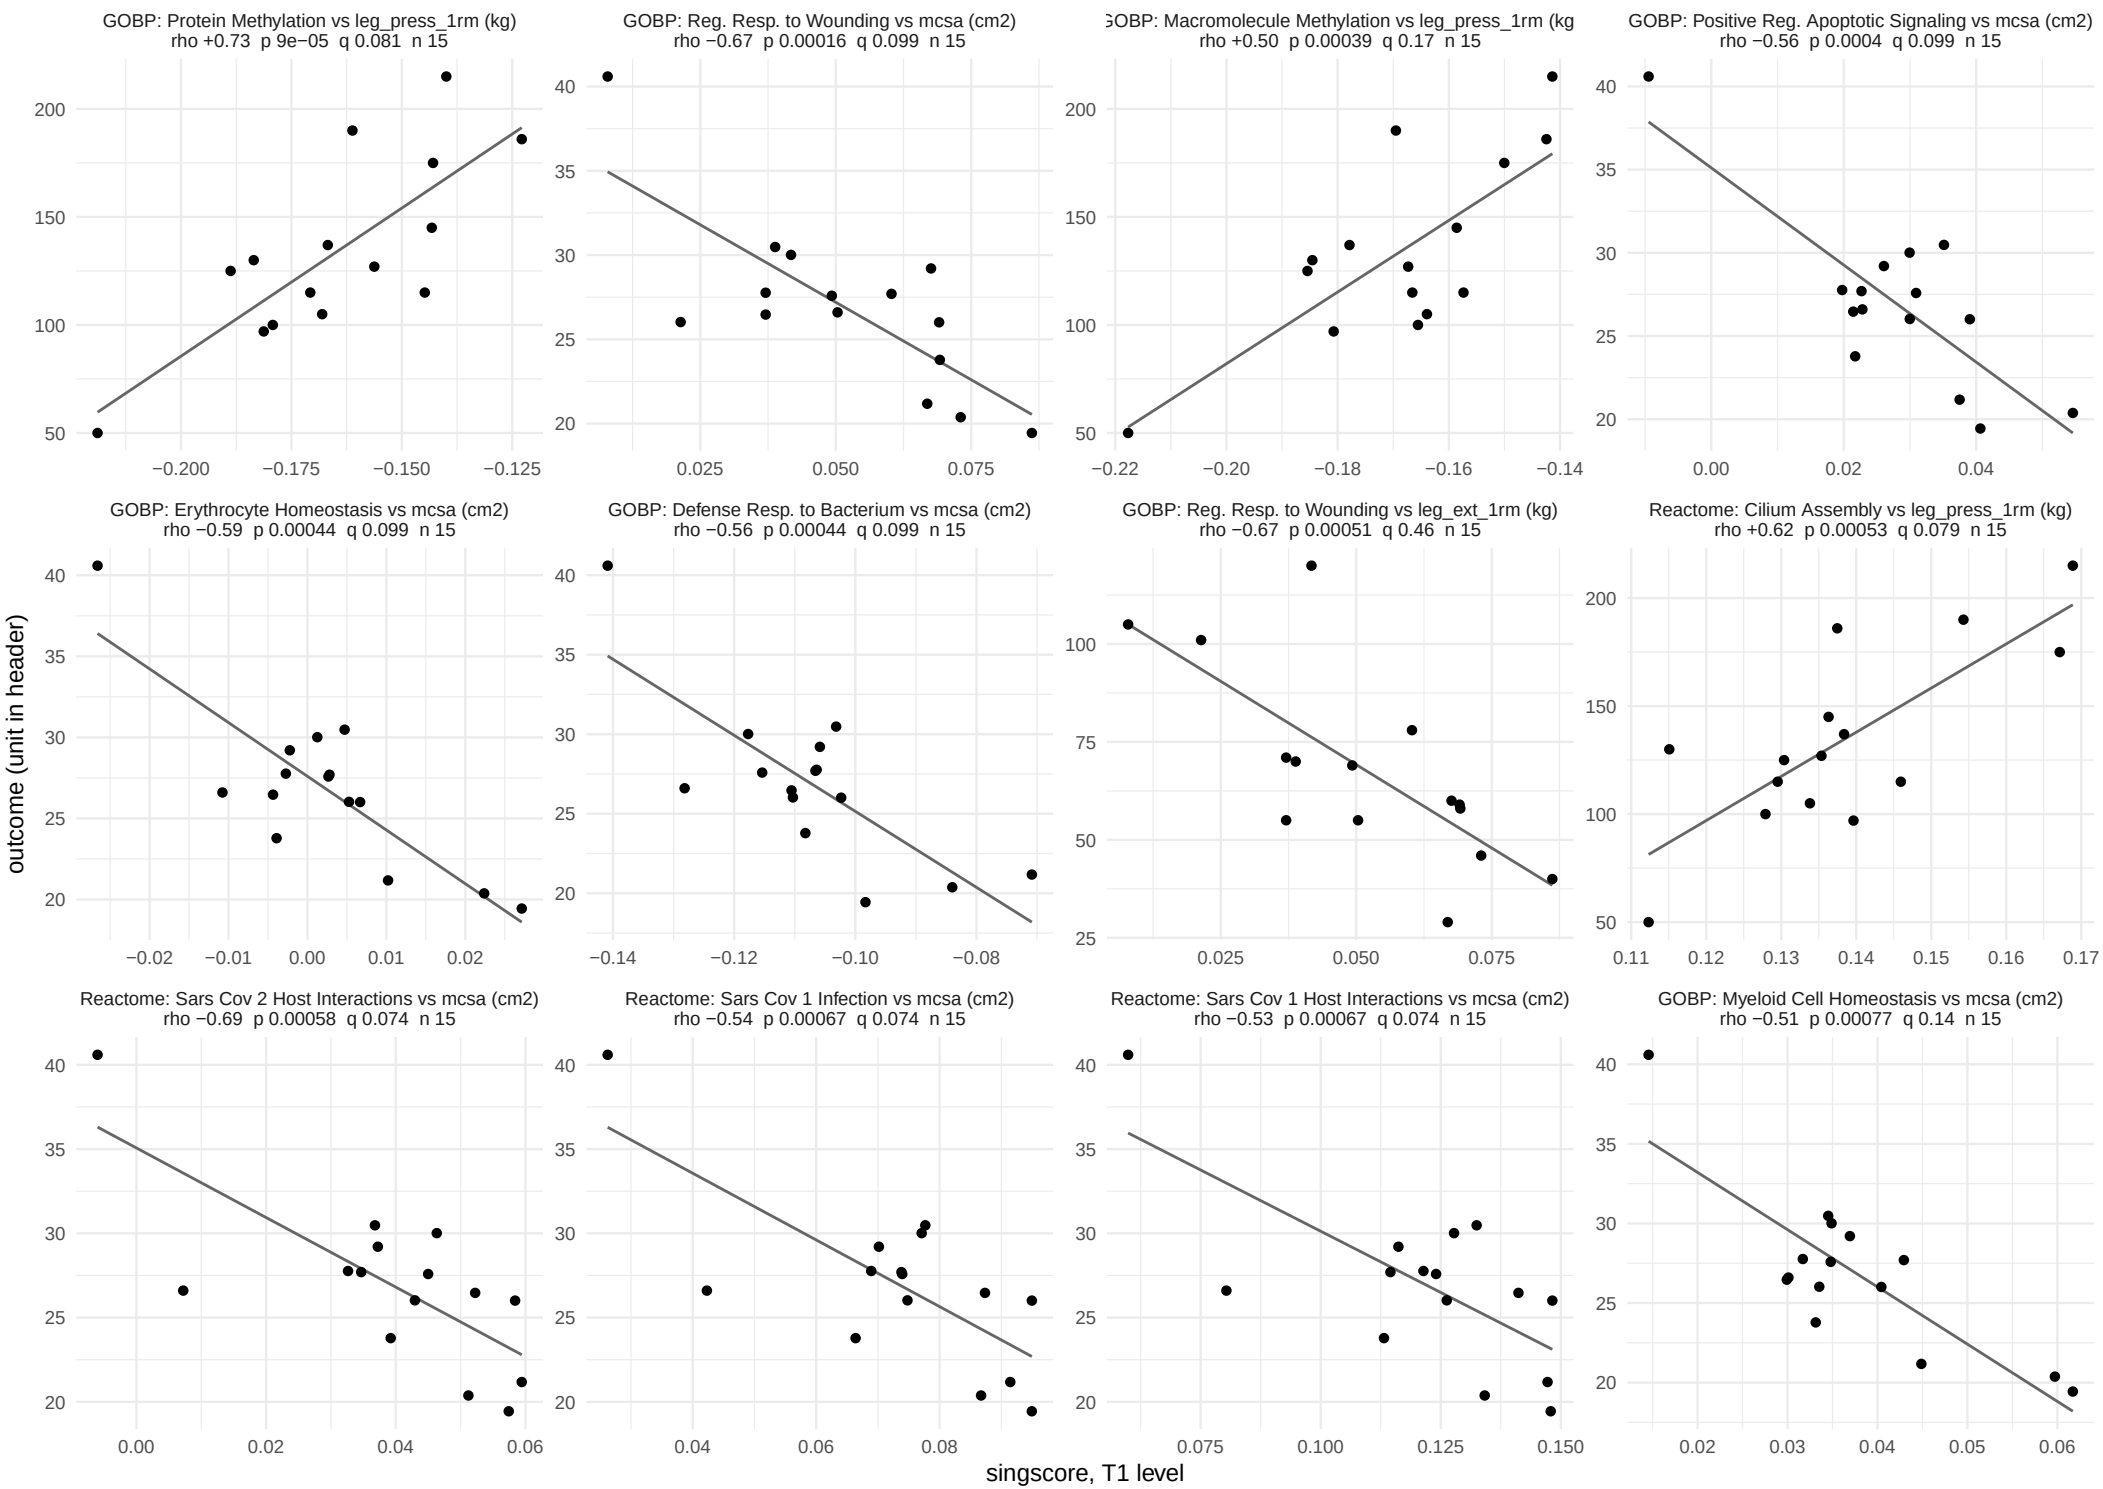

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, baseline_level window


673 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 2 of 57.

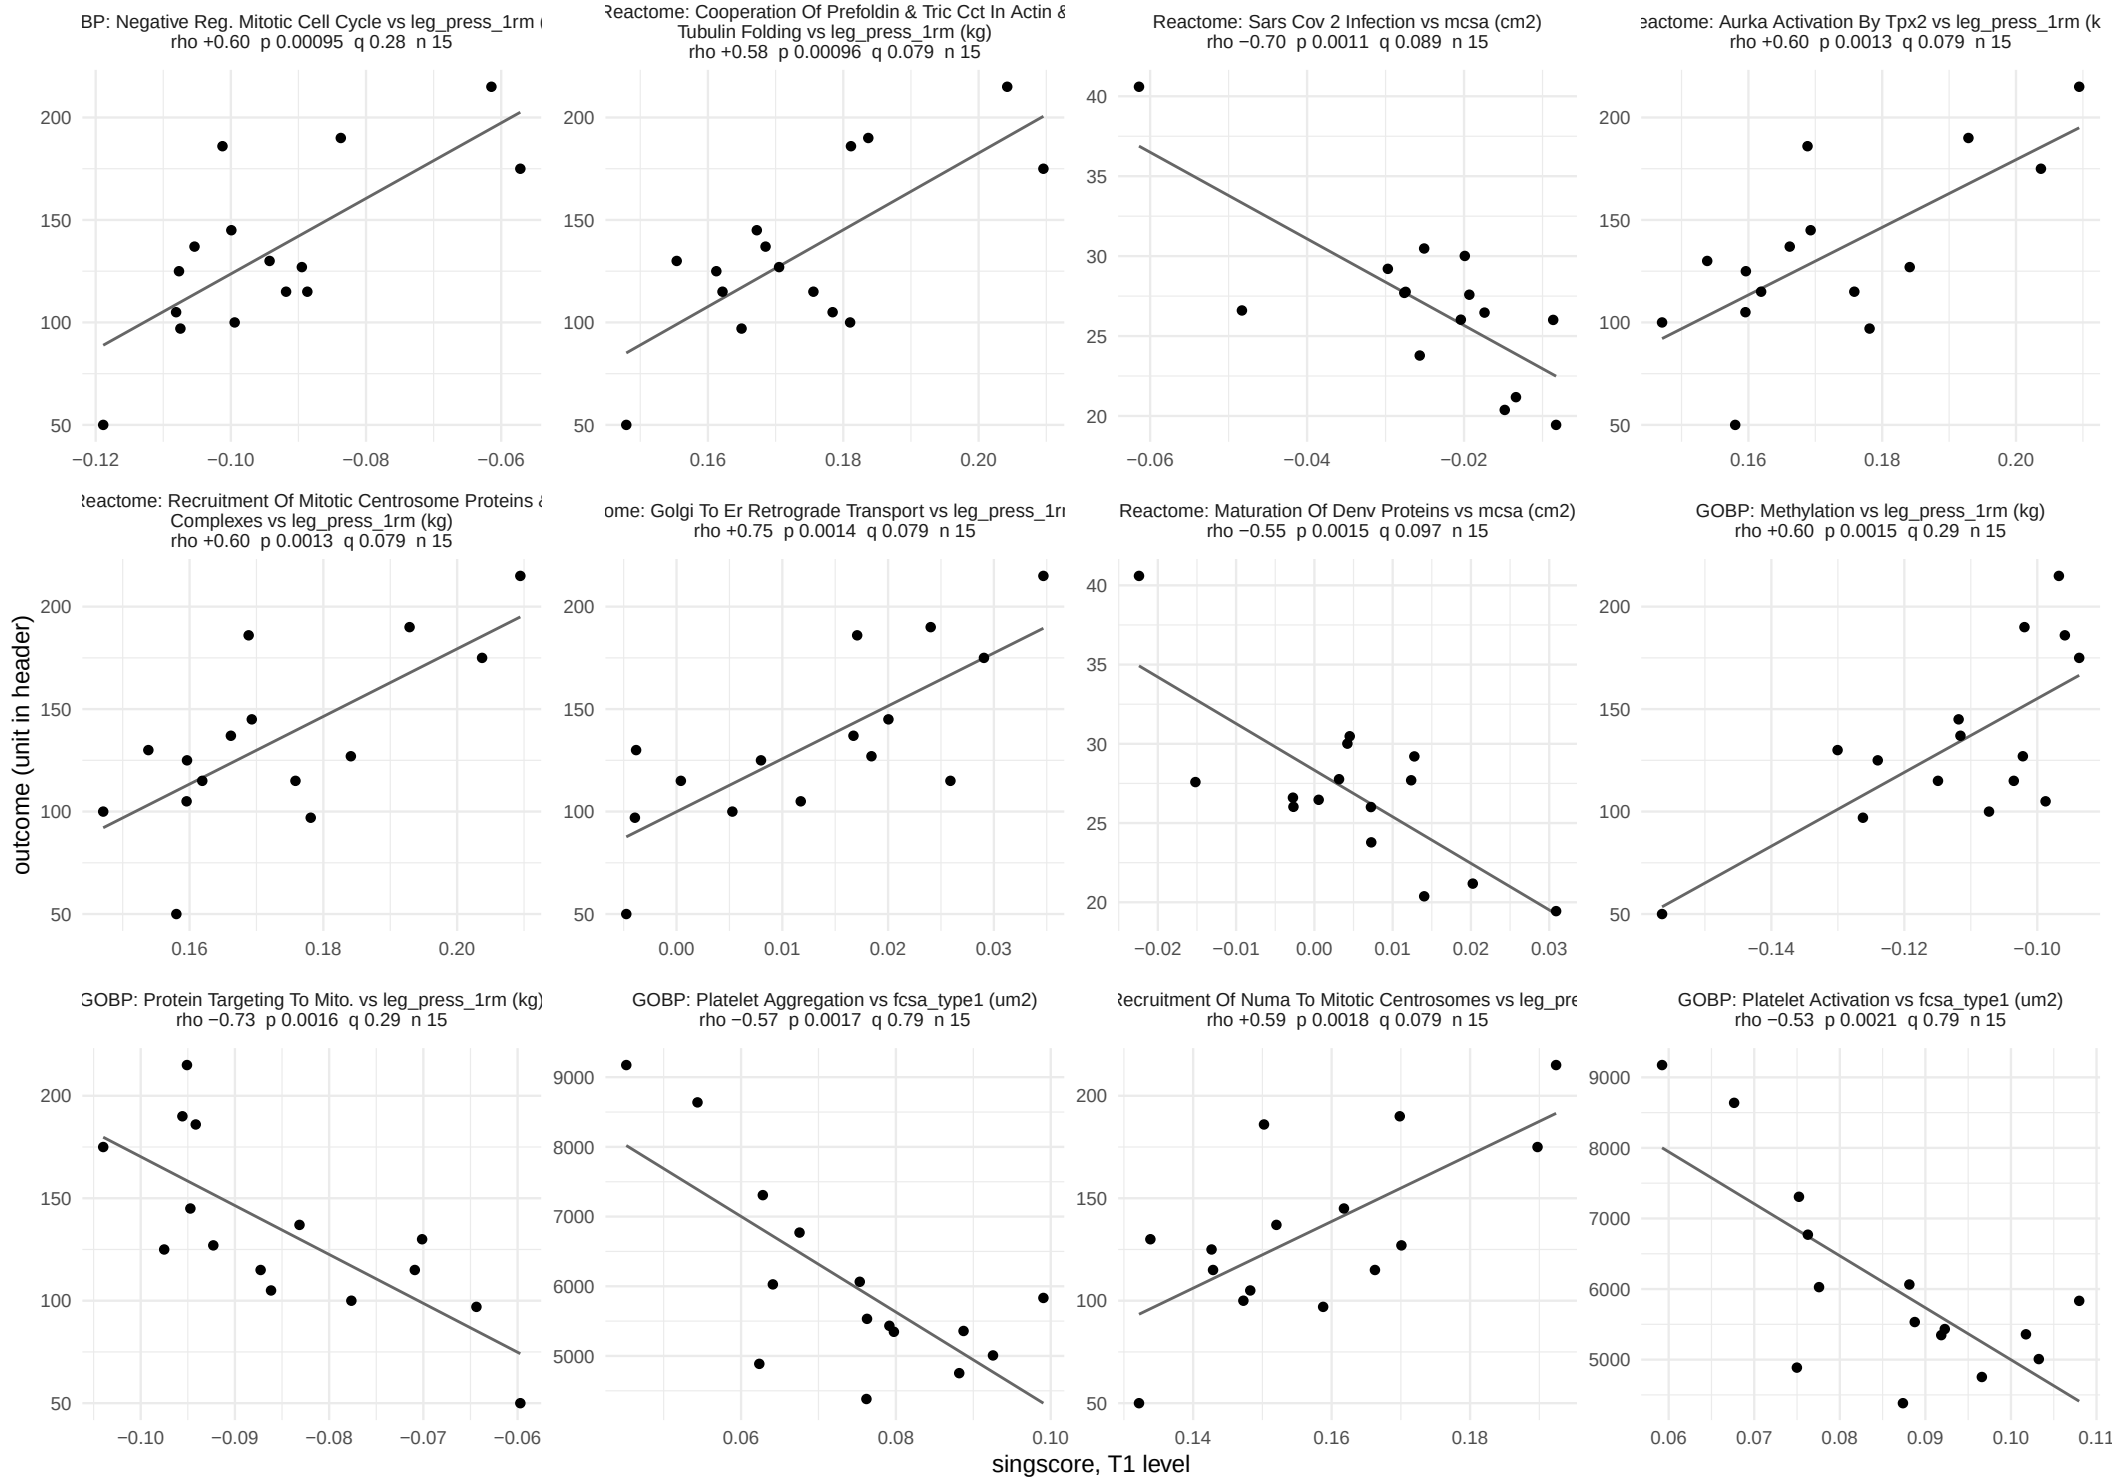

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, baseline_level window


673 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 3 of 57.

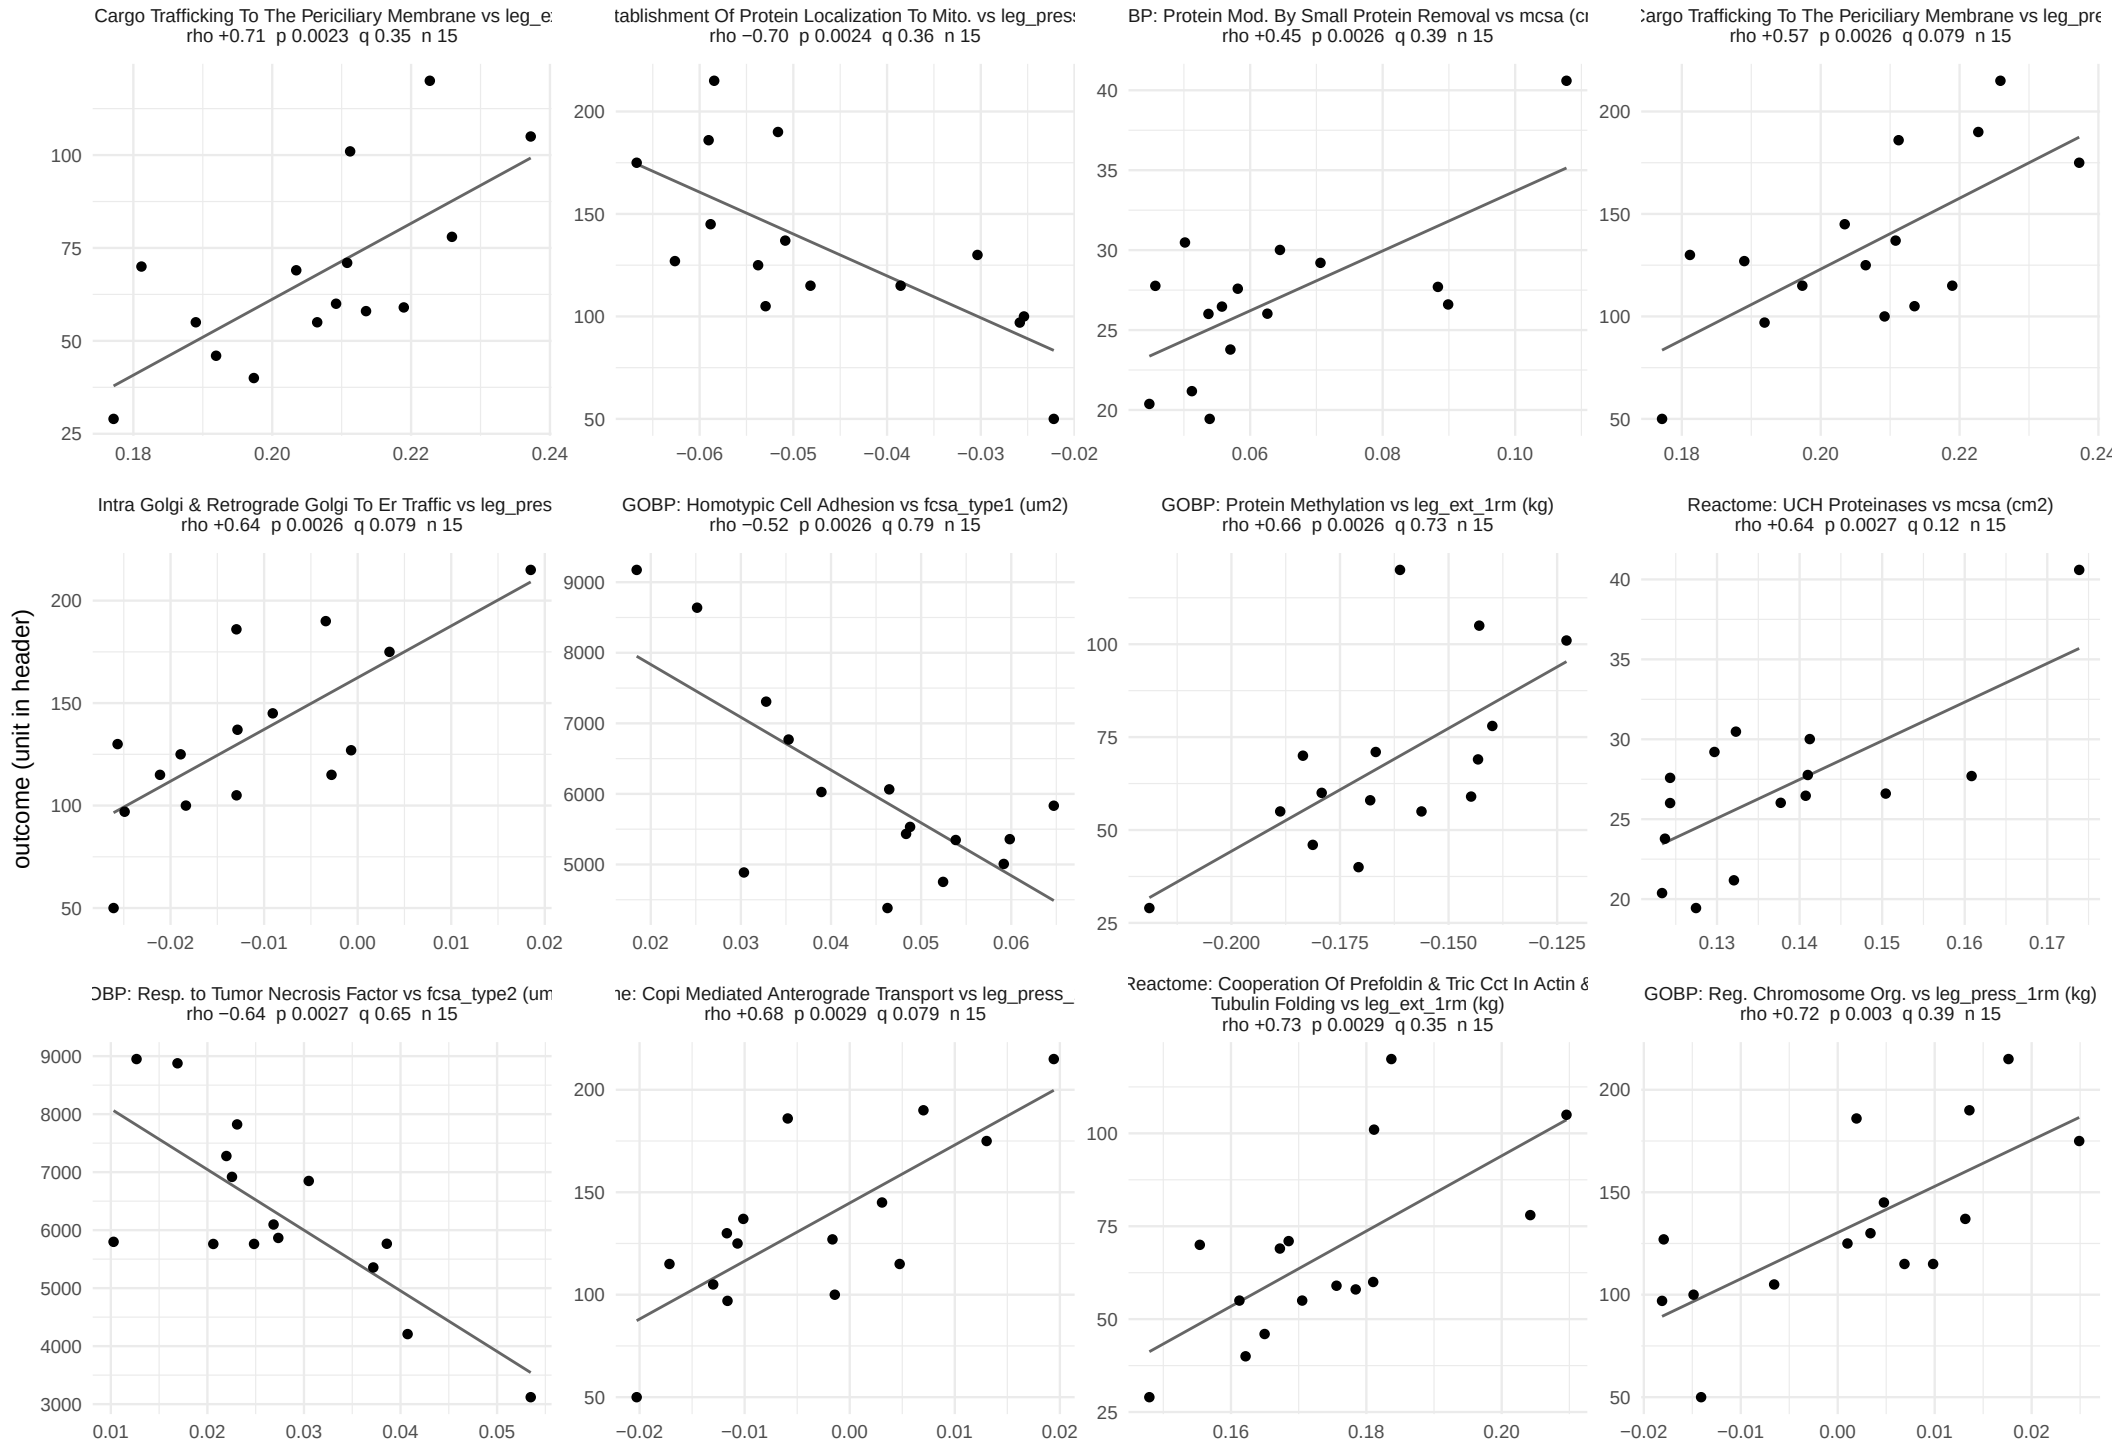

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, baseline_level window


673 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 4 of 57.

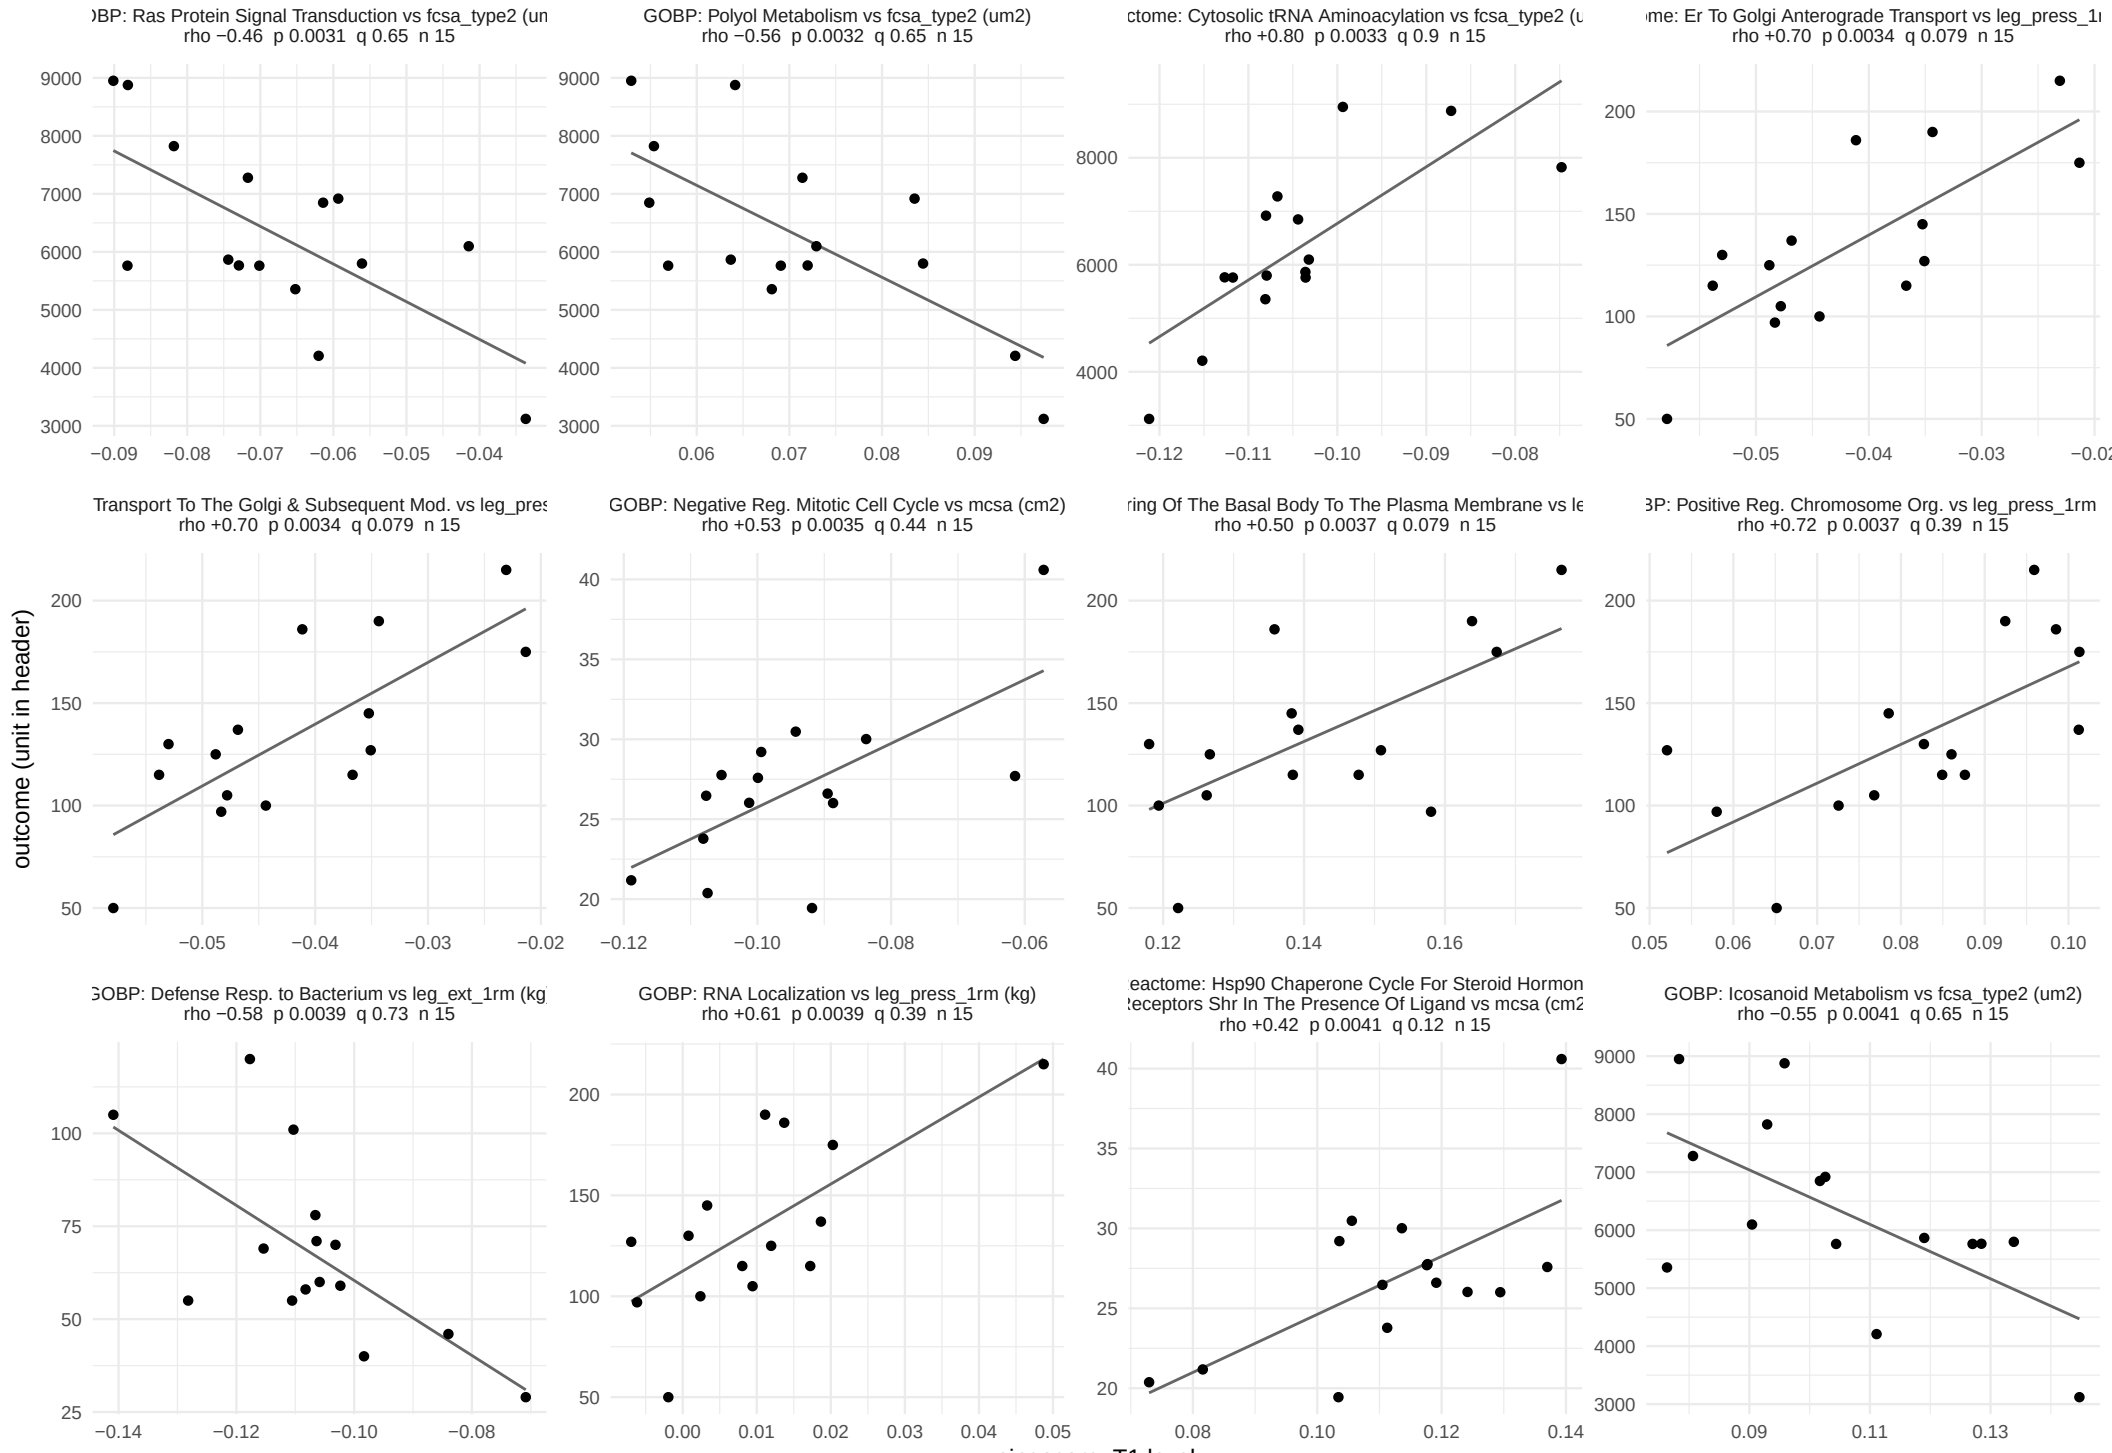

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, baseline_level window


673 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 5 of 57.

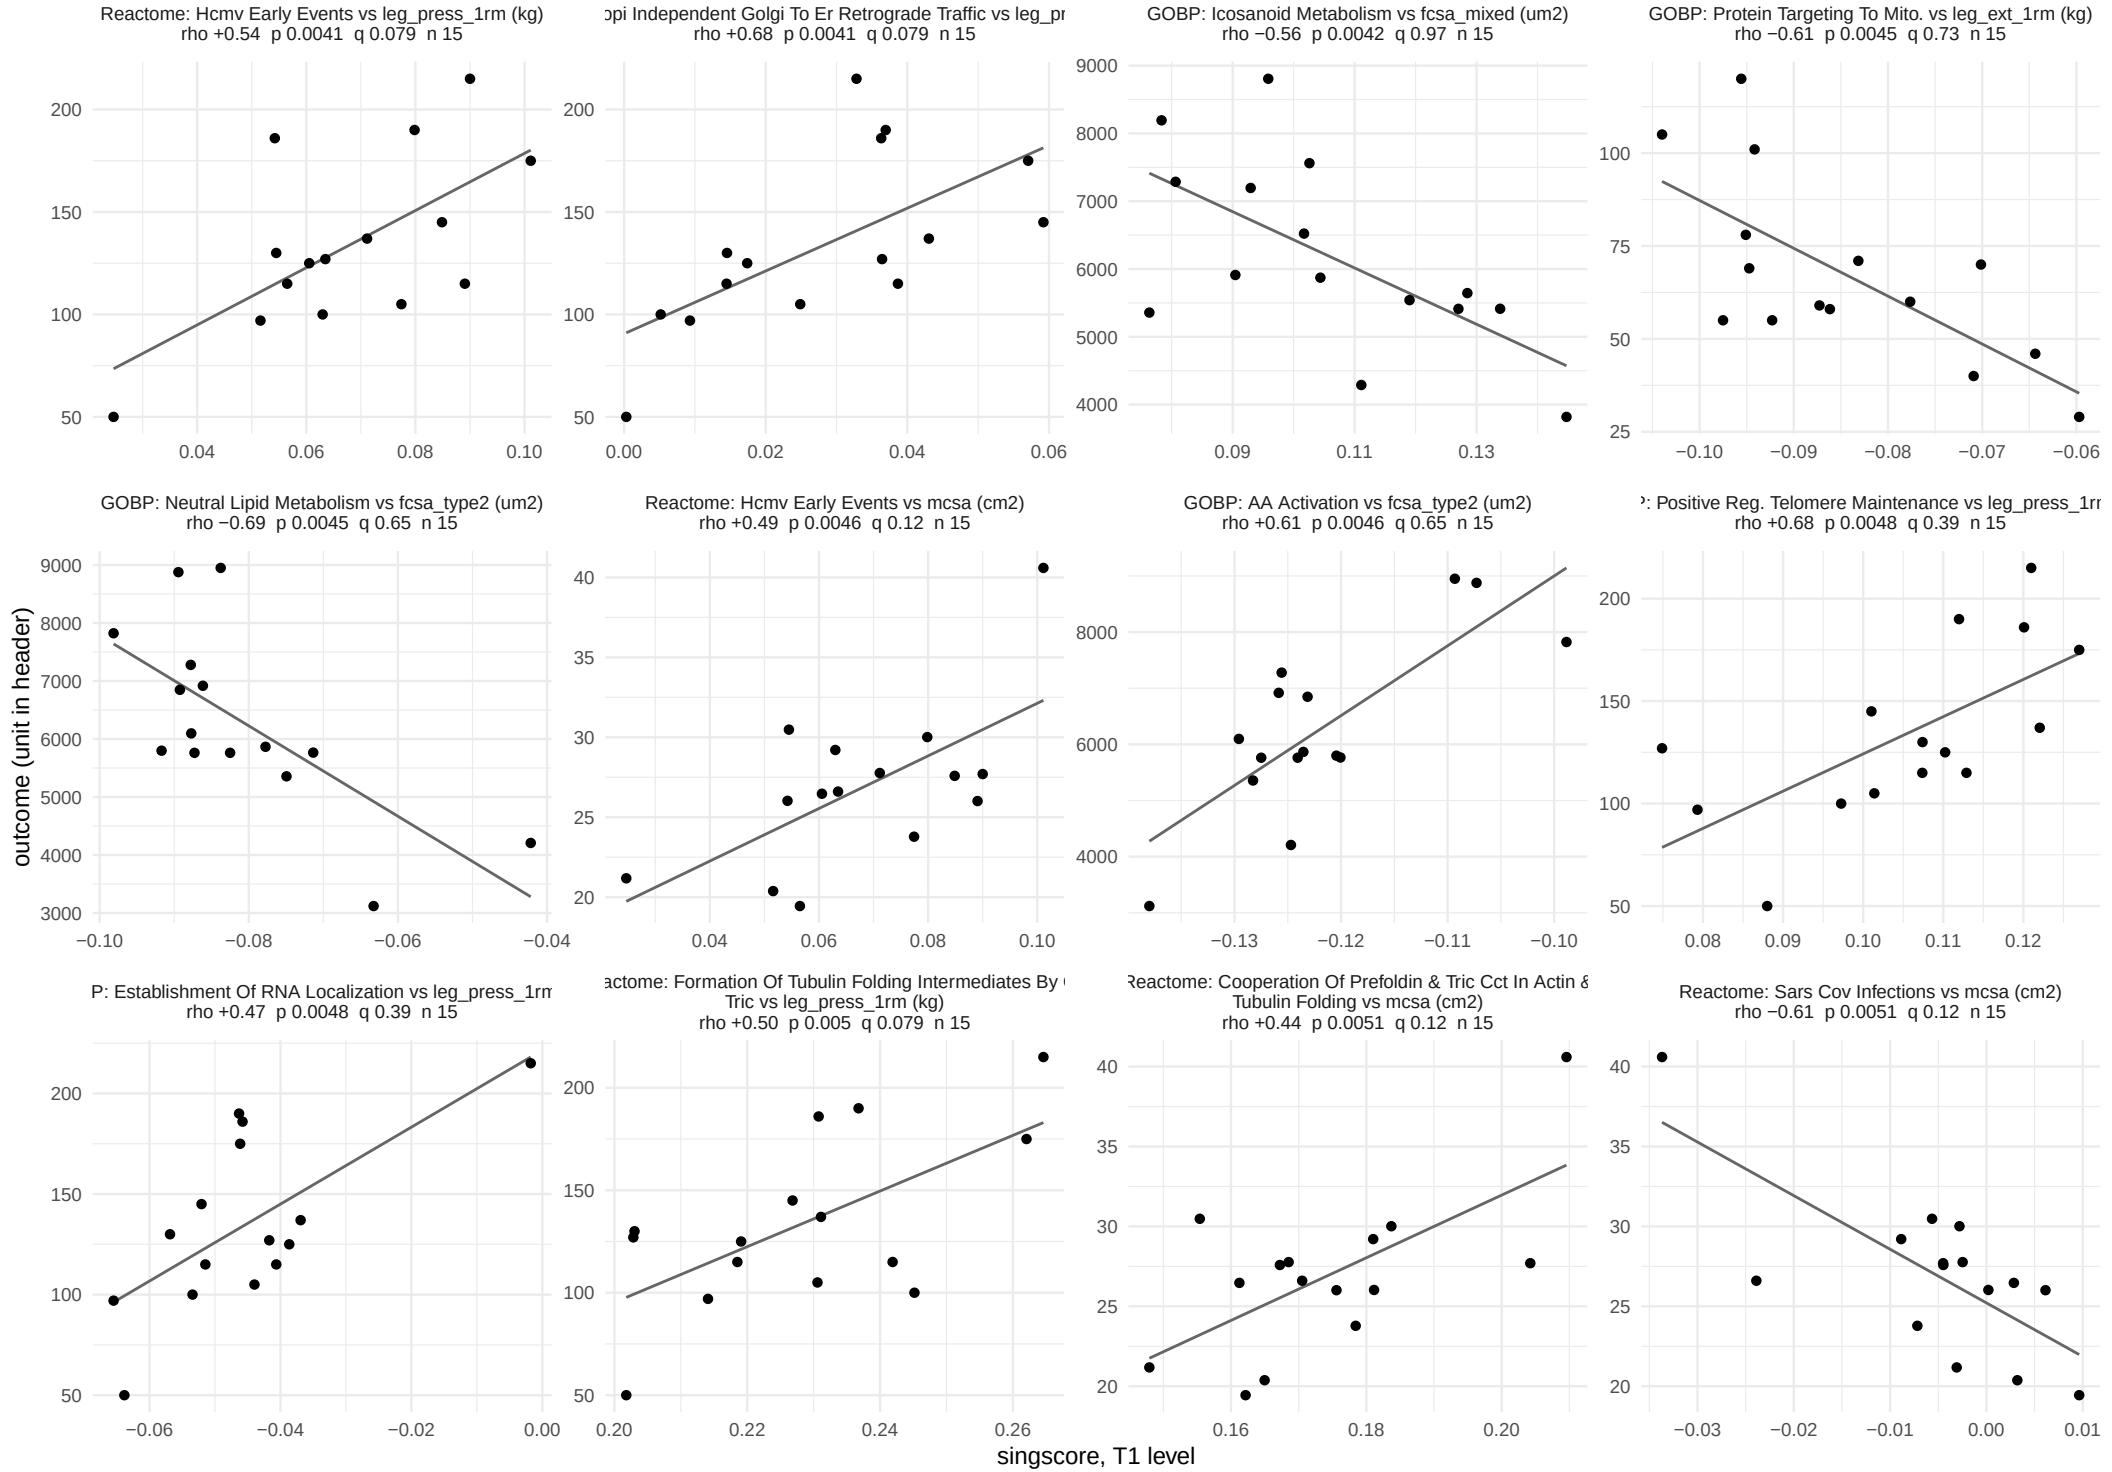

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, baseline_level window


673 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 6 of 57.

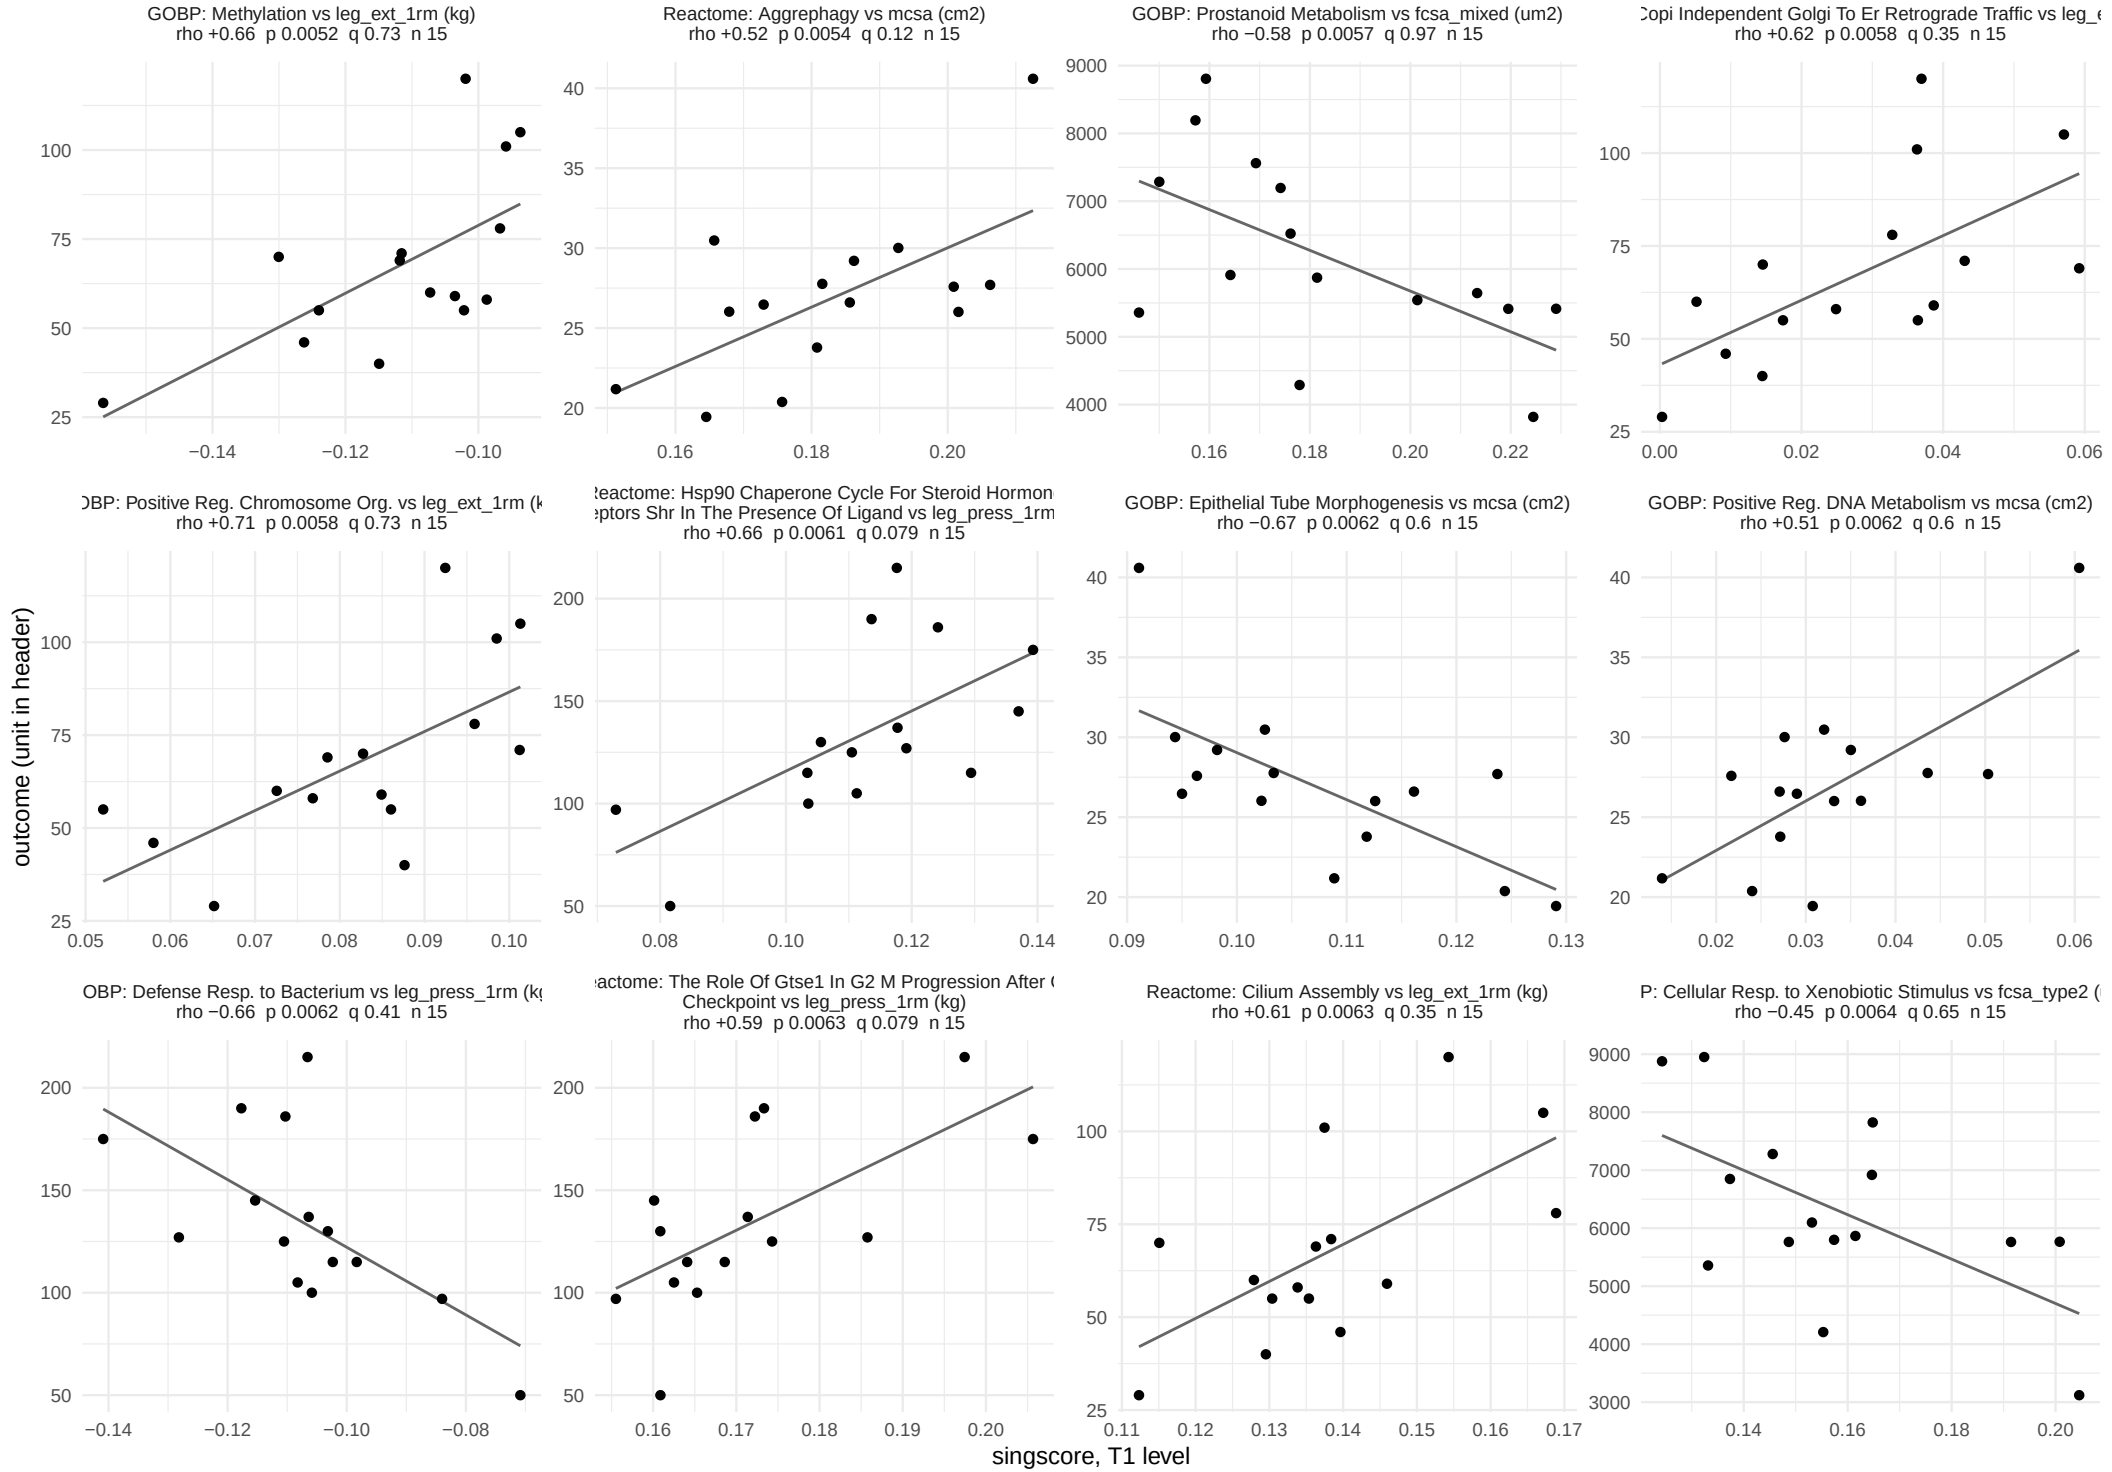

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, baseline_level window


673 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 7 of 57.

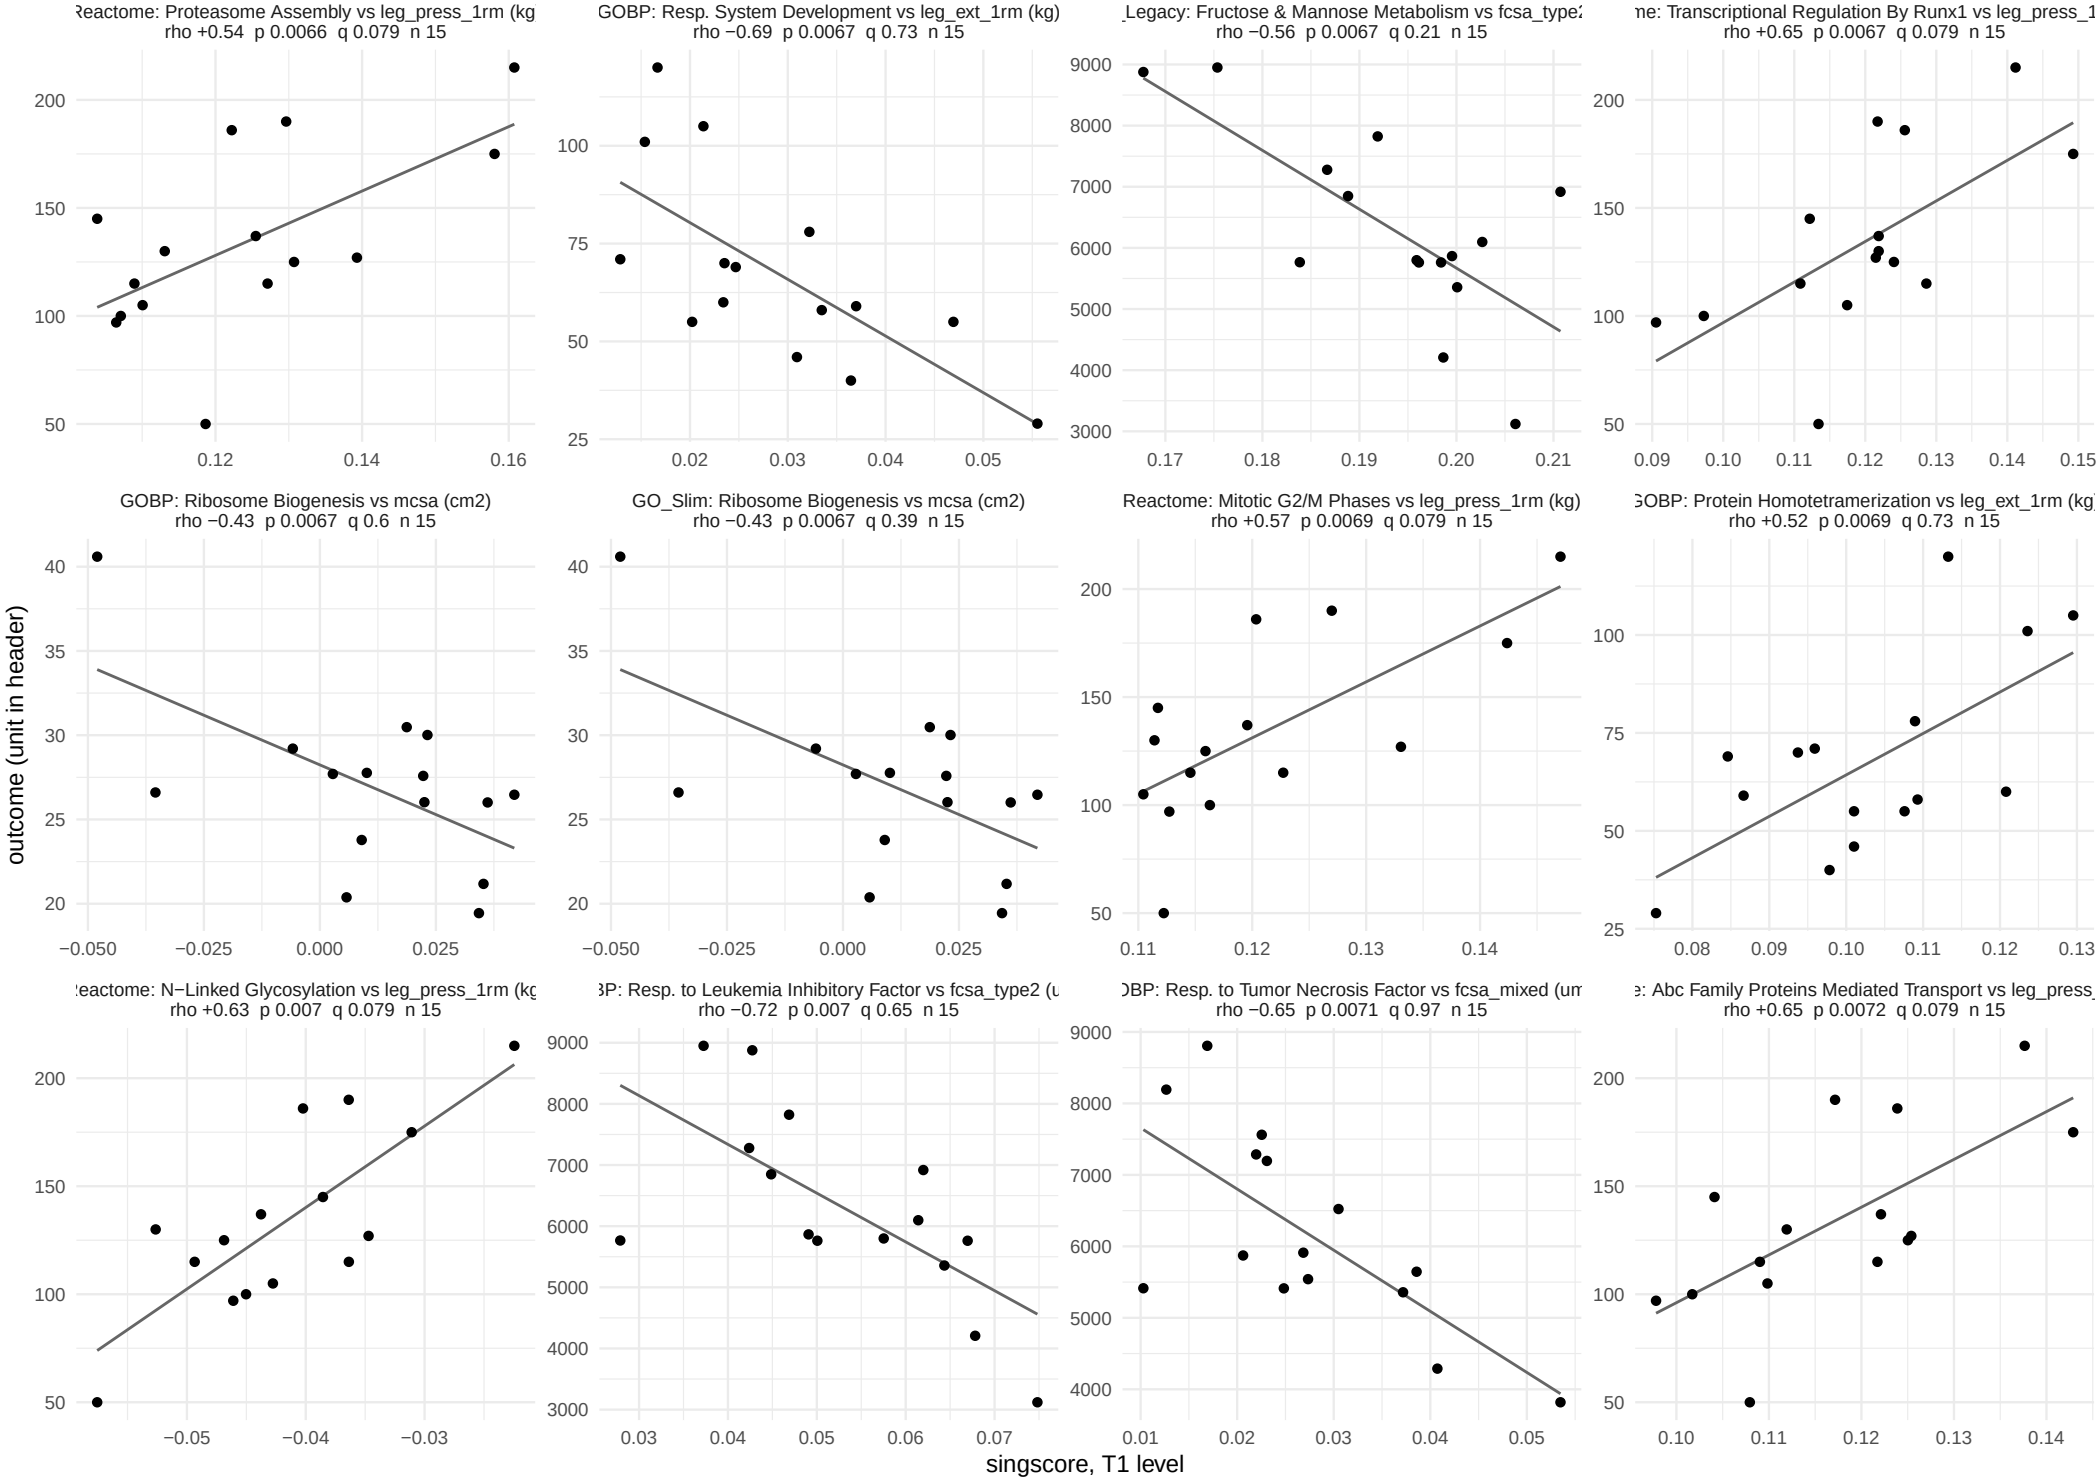

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, baseline_level window


673 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 8 of 57.

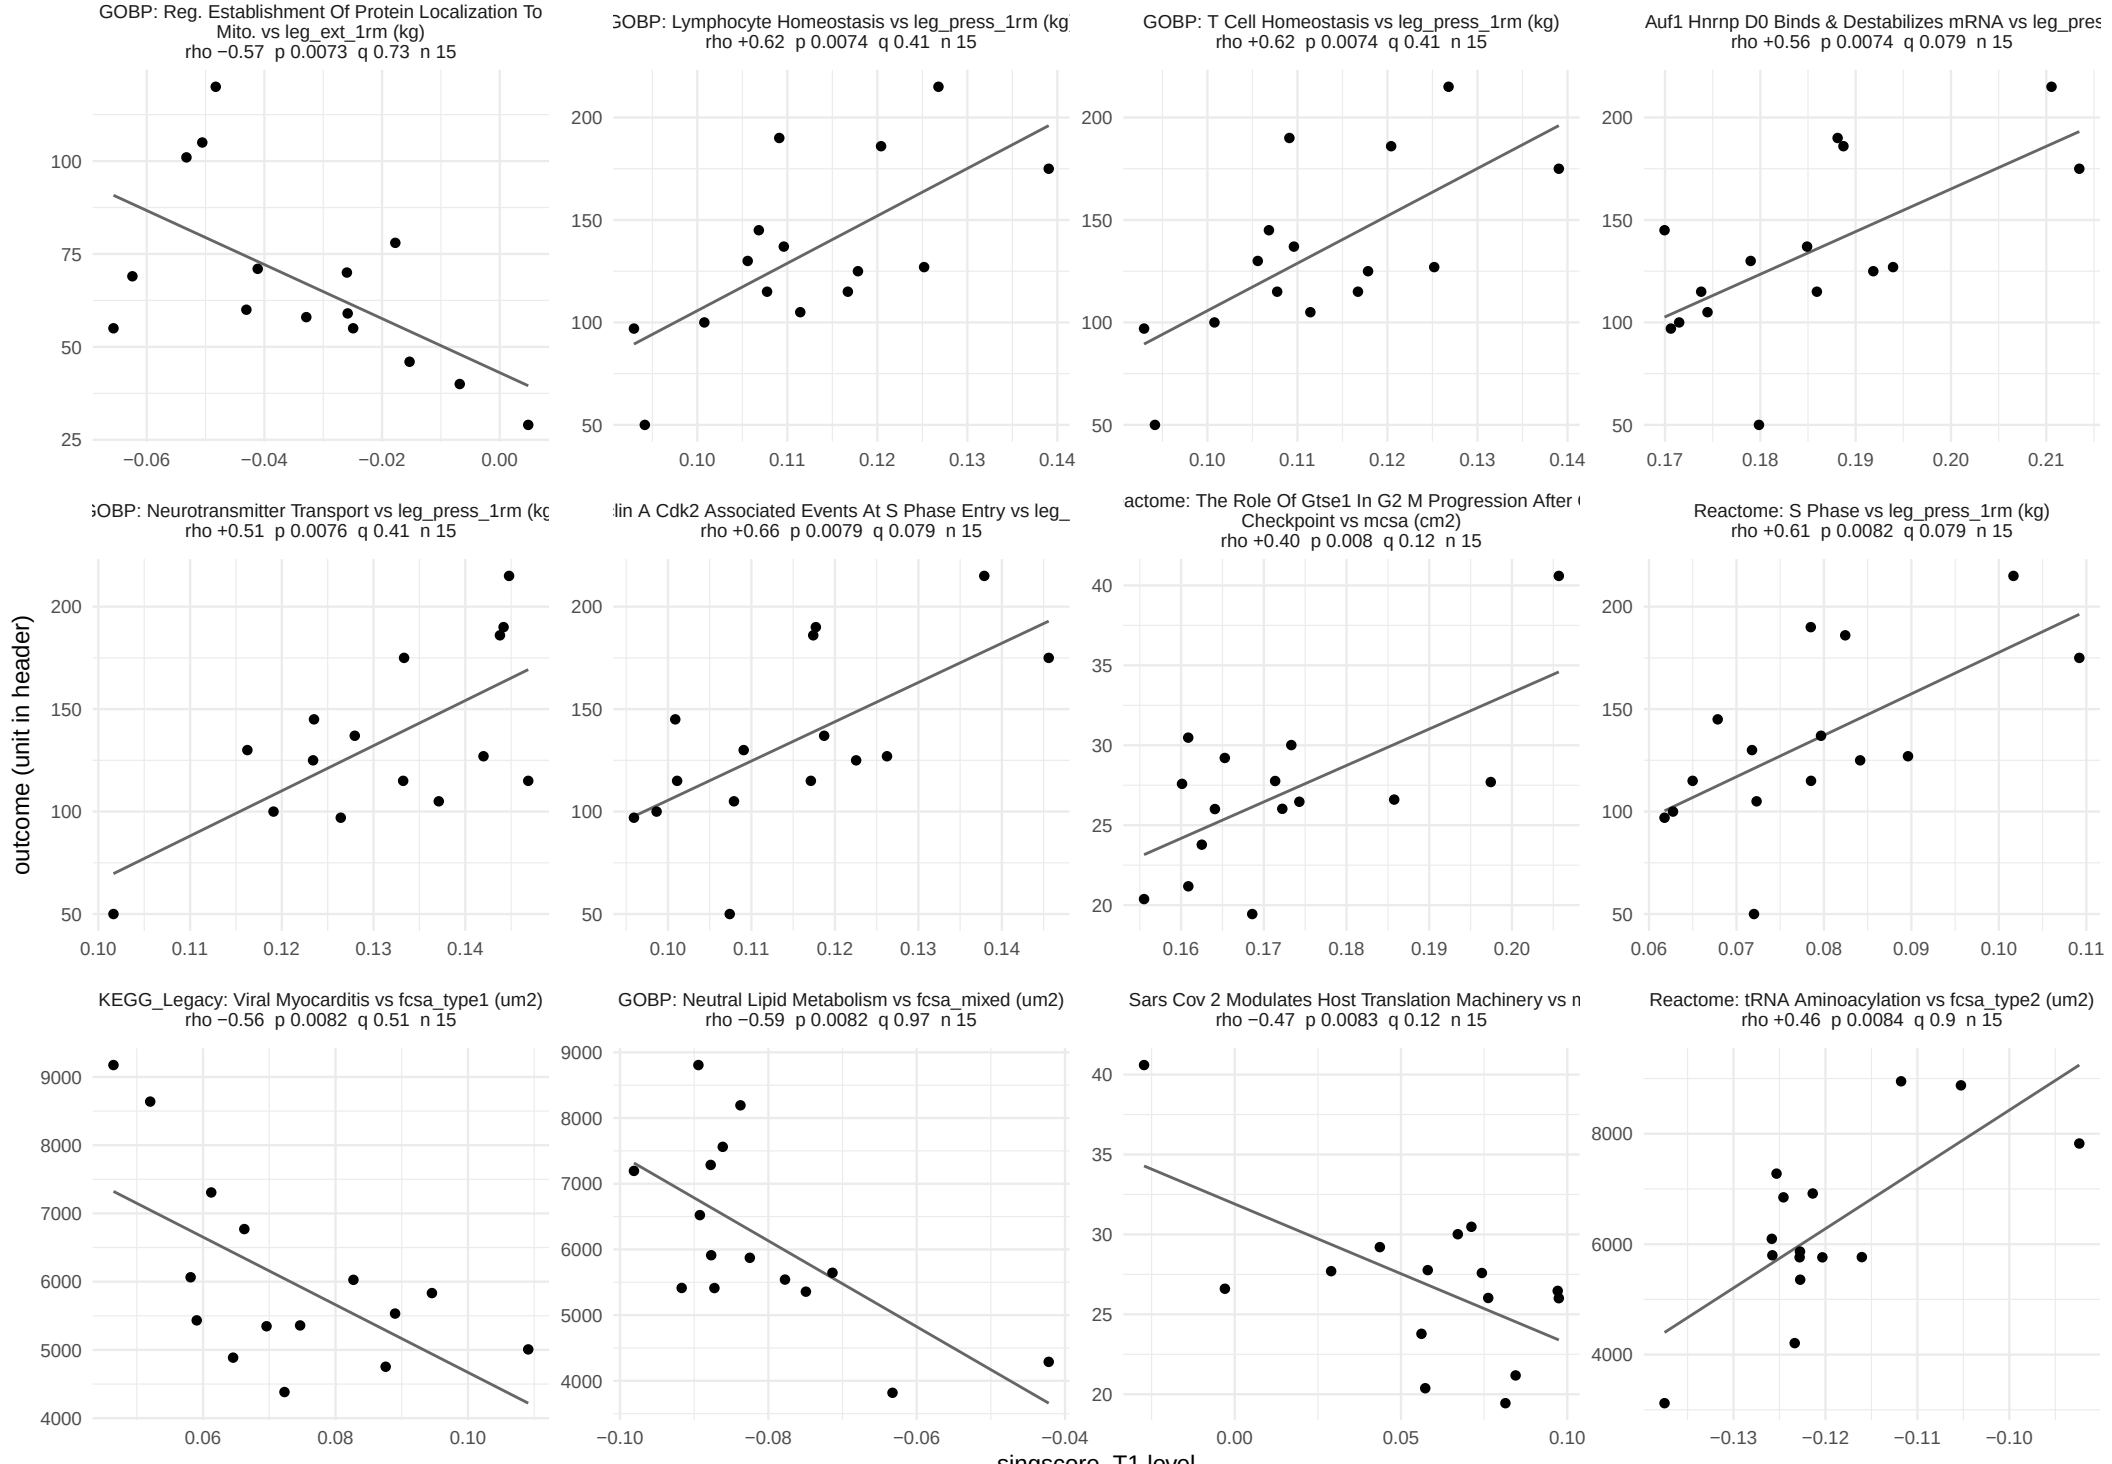

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, baseline_level window


673 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 9 of 57.

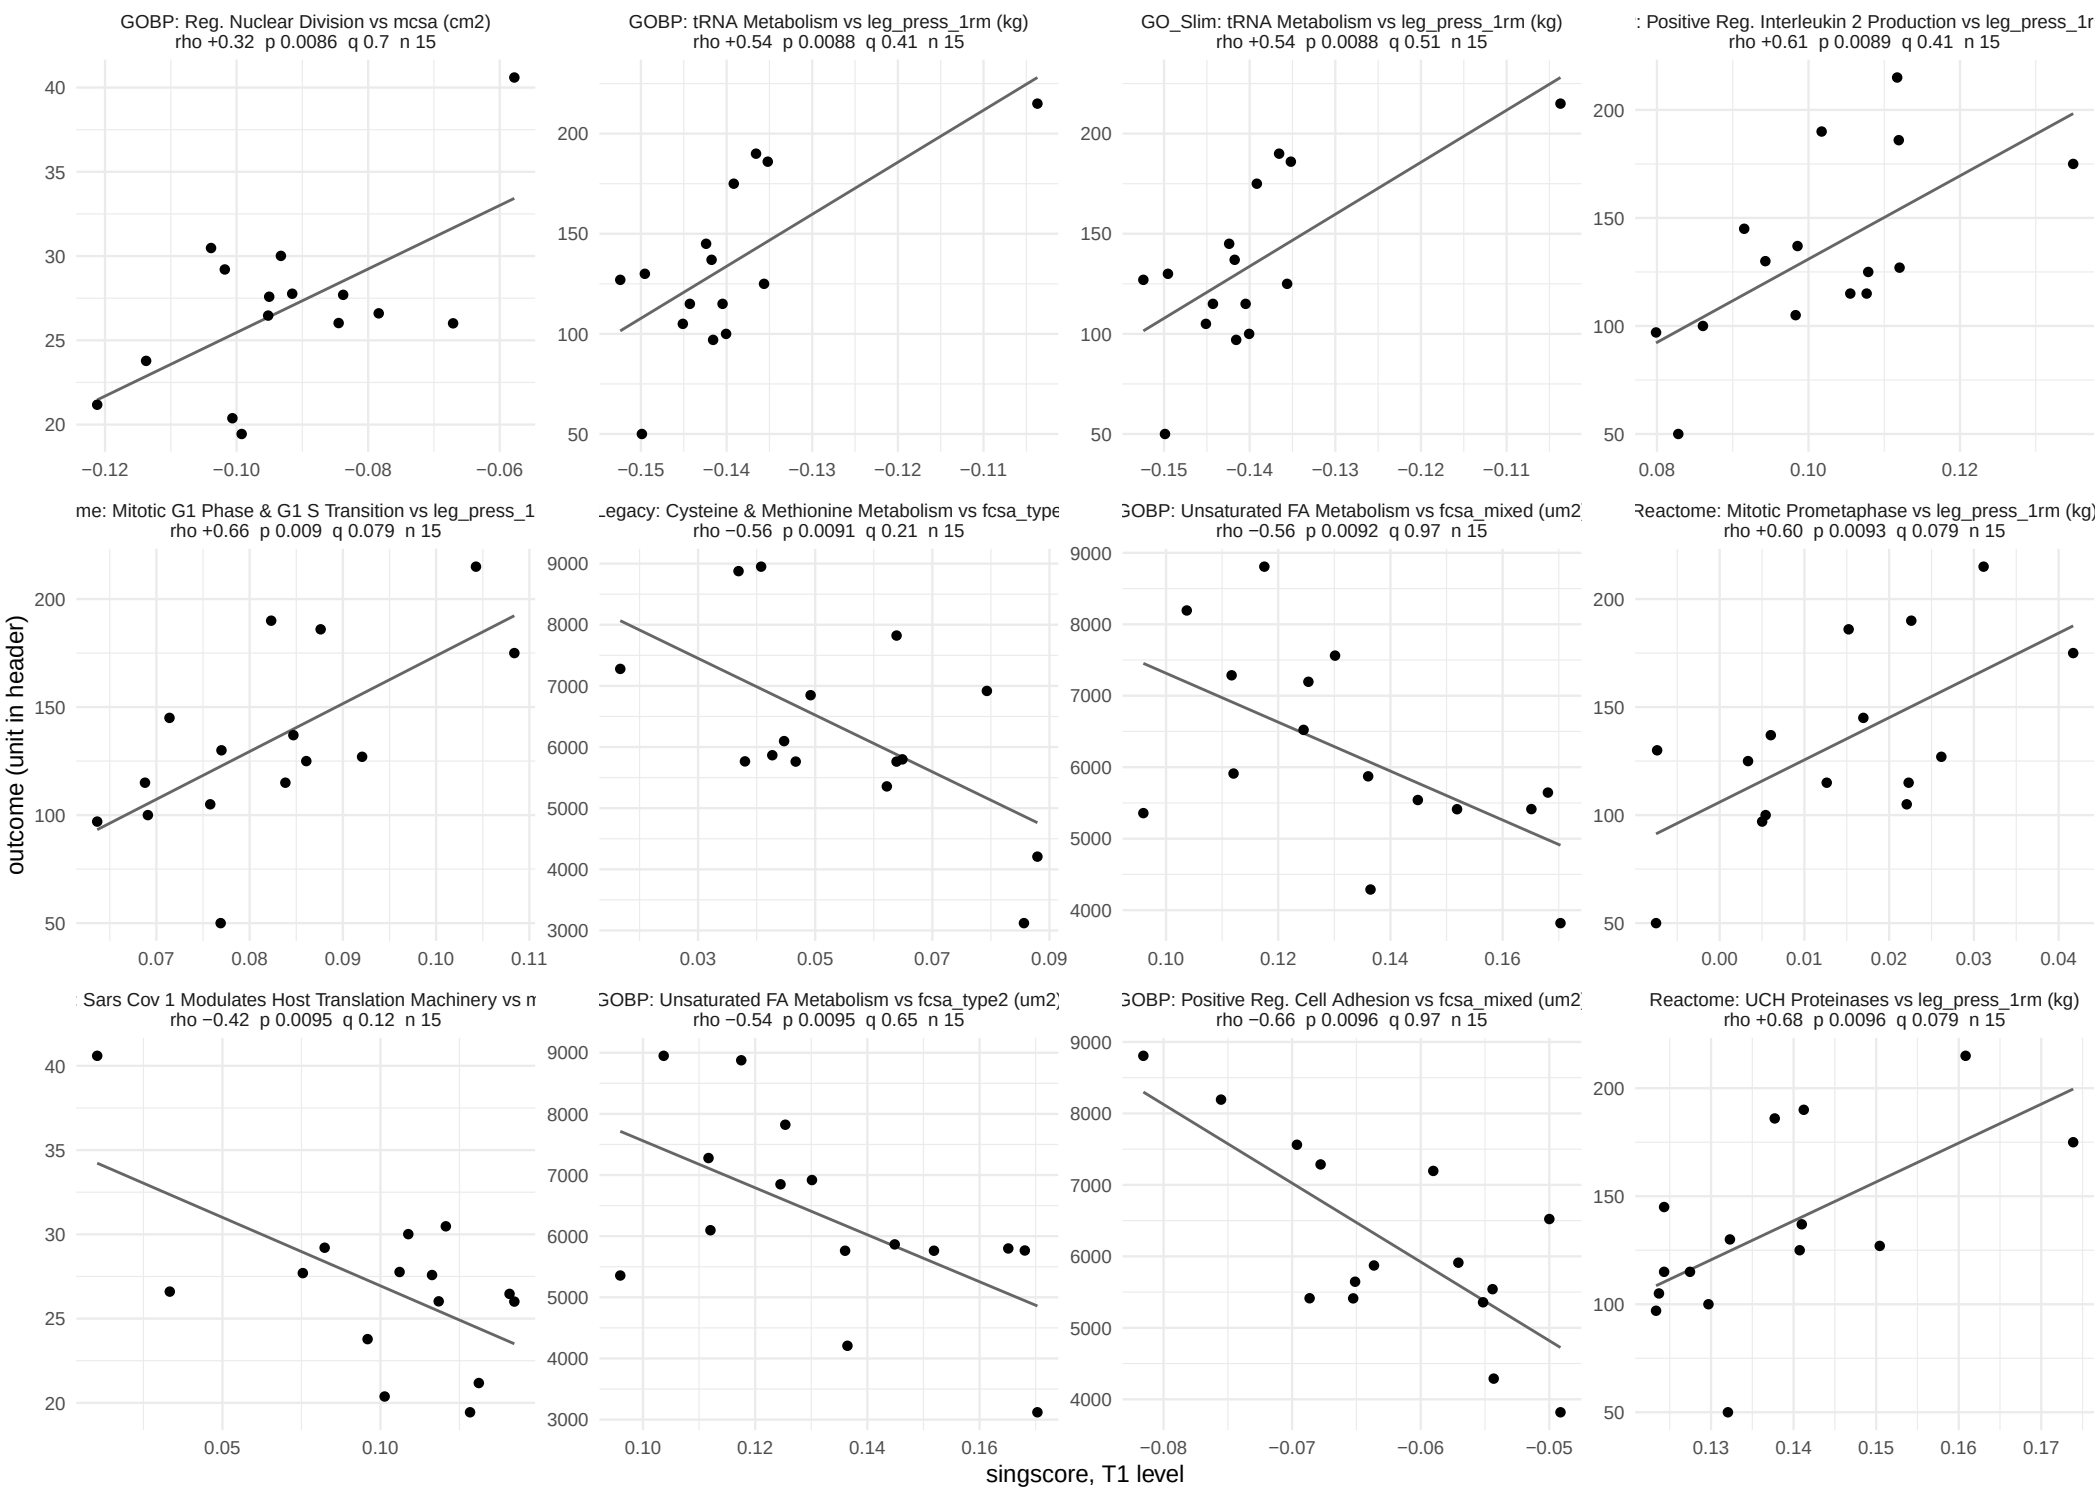

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, baseline_level window


673 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 10 of 57.

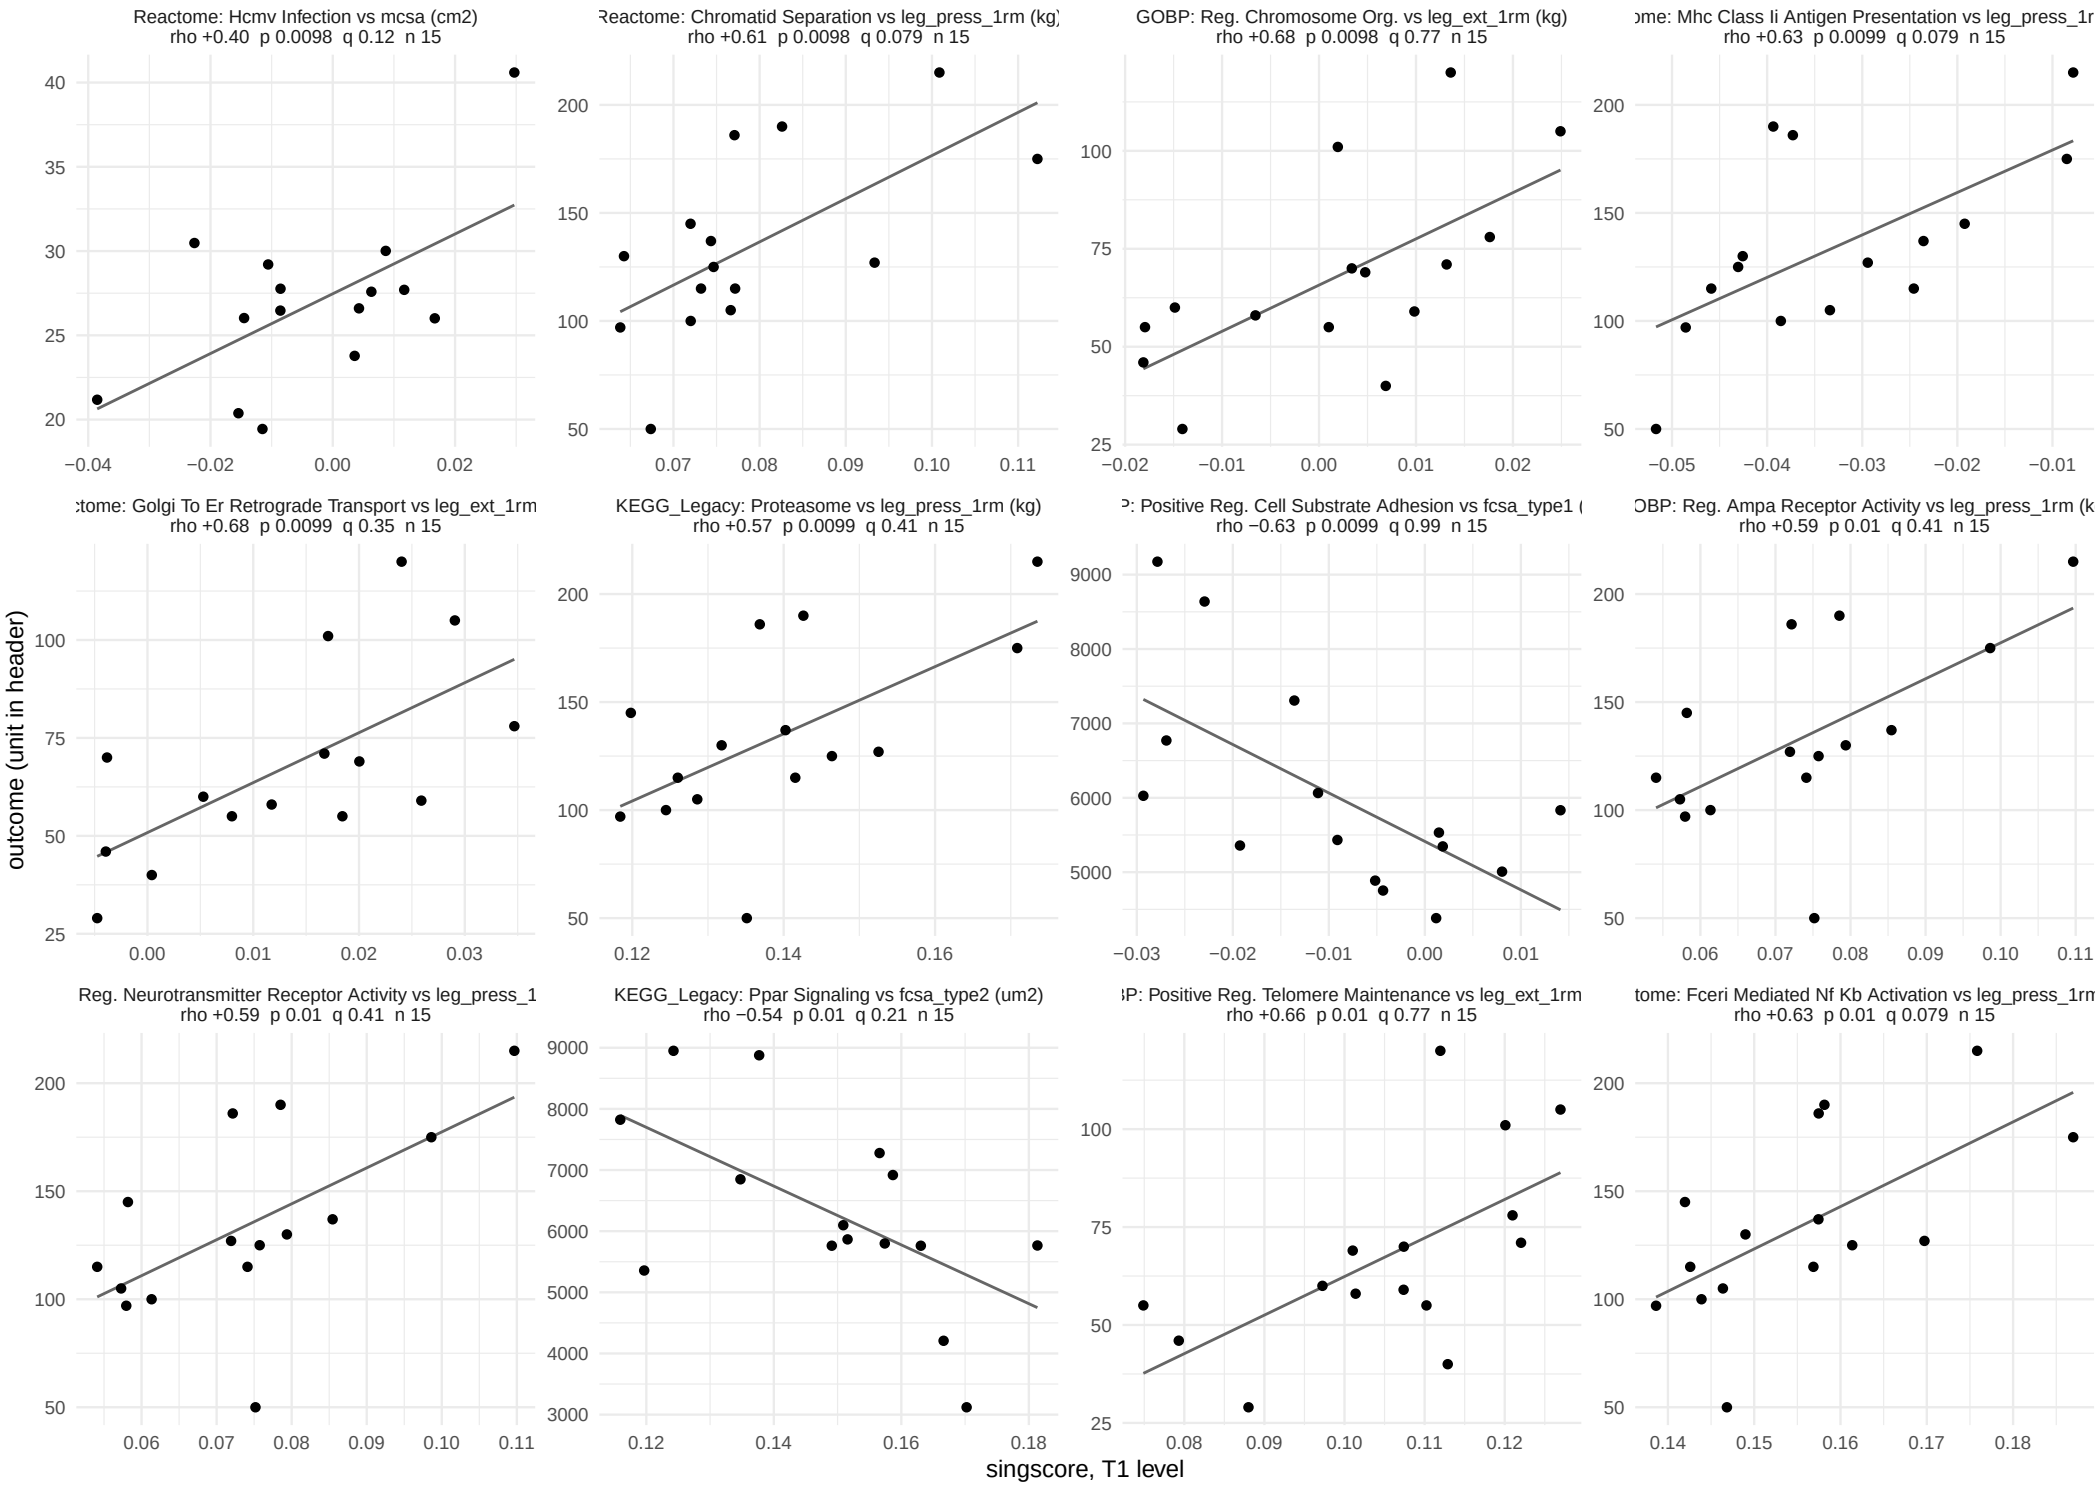

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, baseline_level window


673 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 11 of 57.

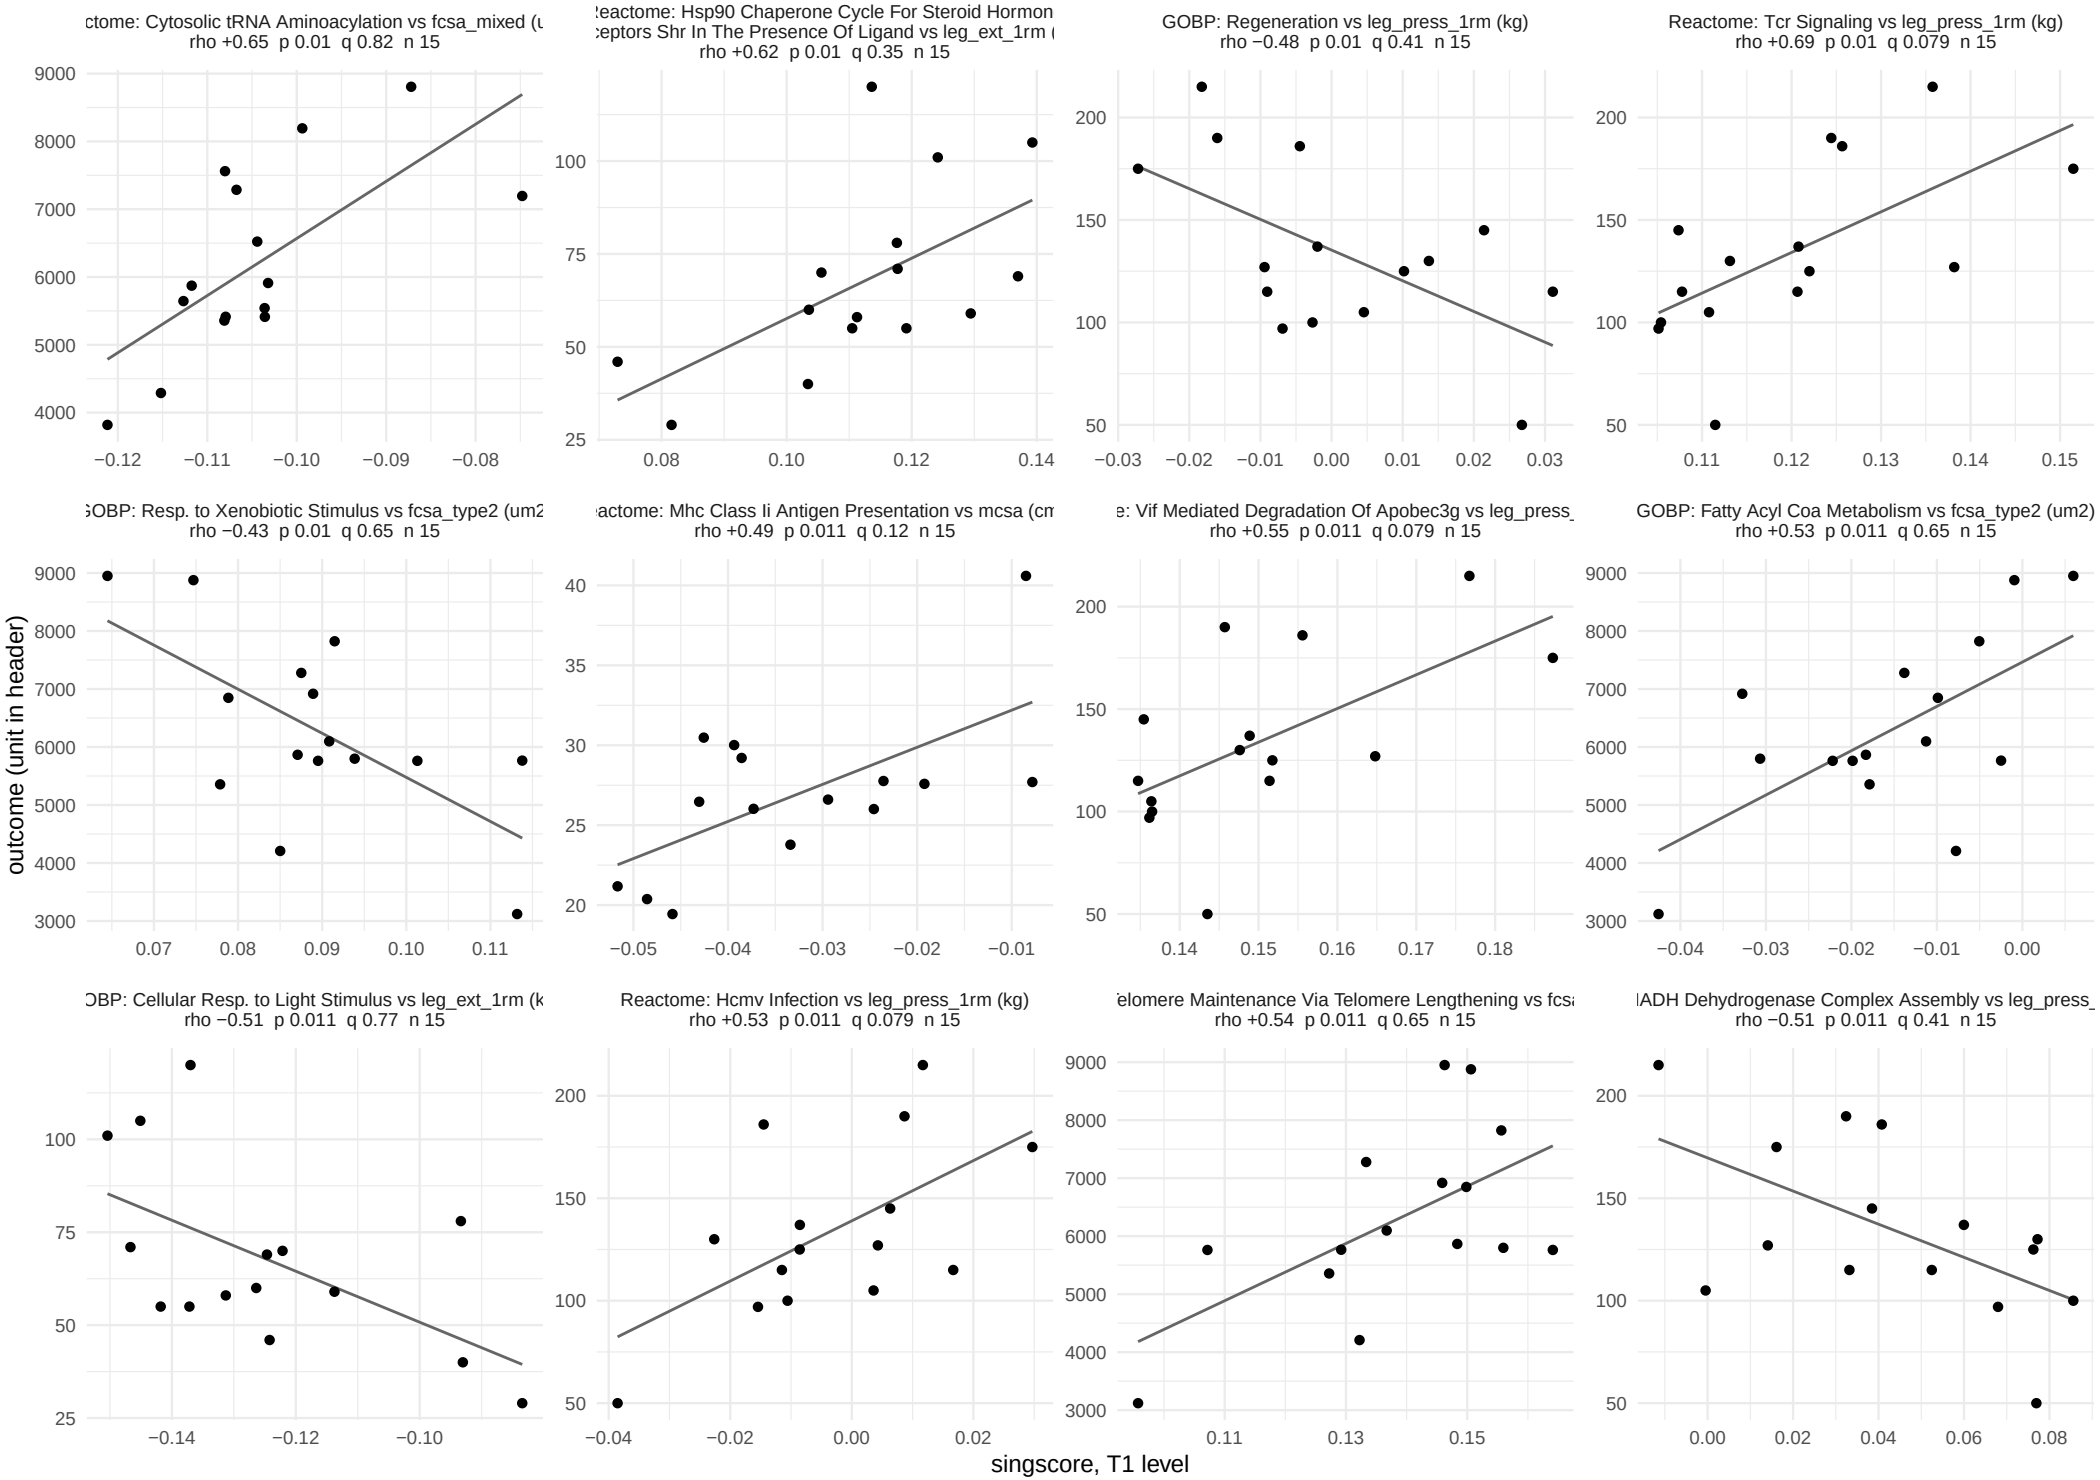

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, baseline_level window


673 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 12 of 57.

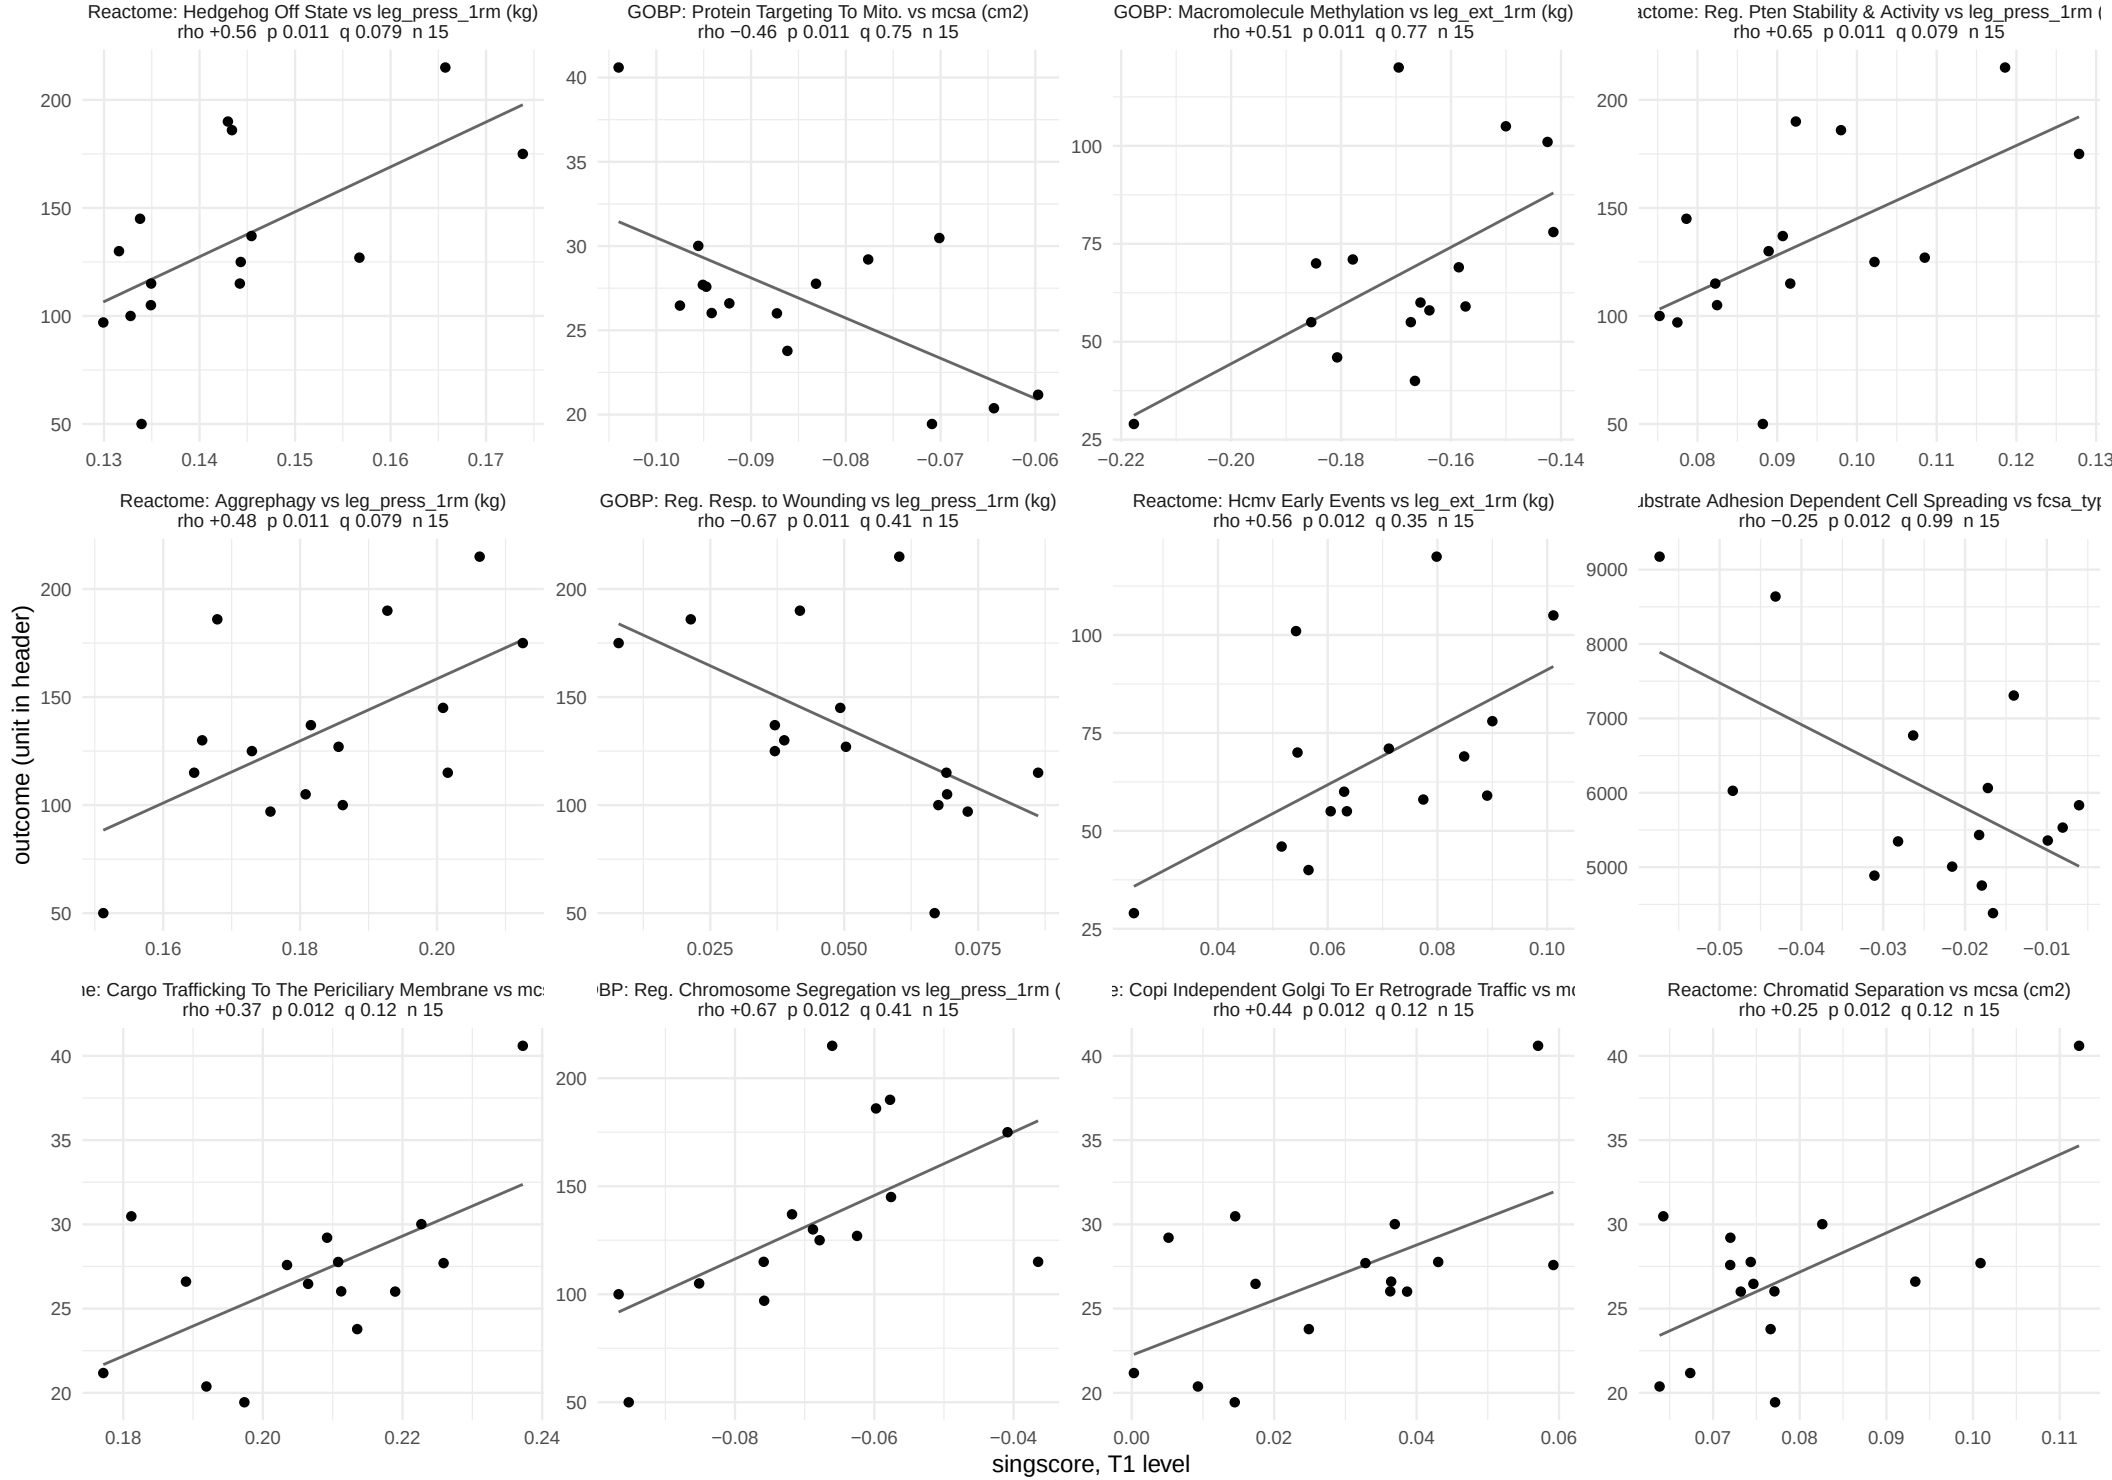

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, baseline_level window


673 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 13 of 57.

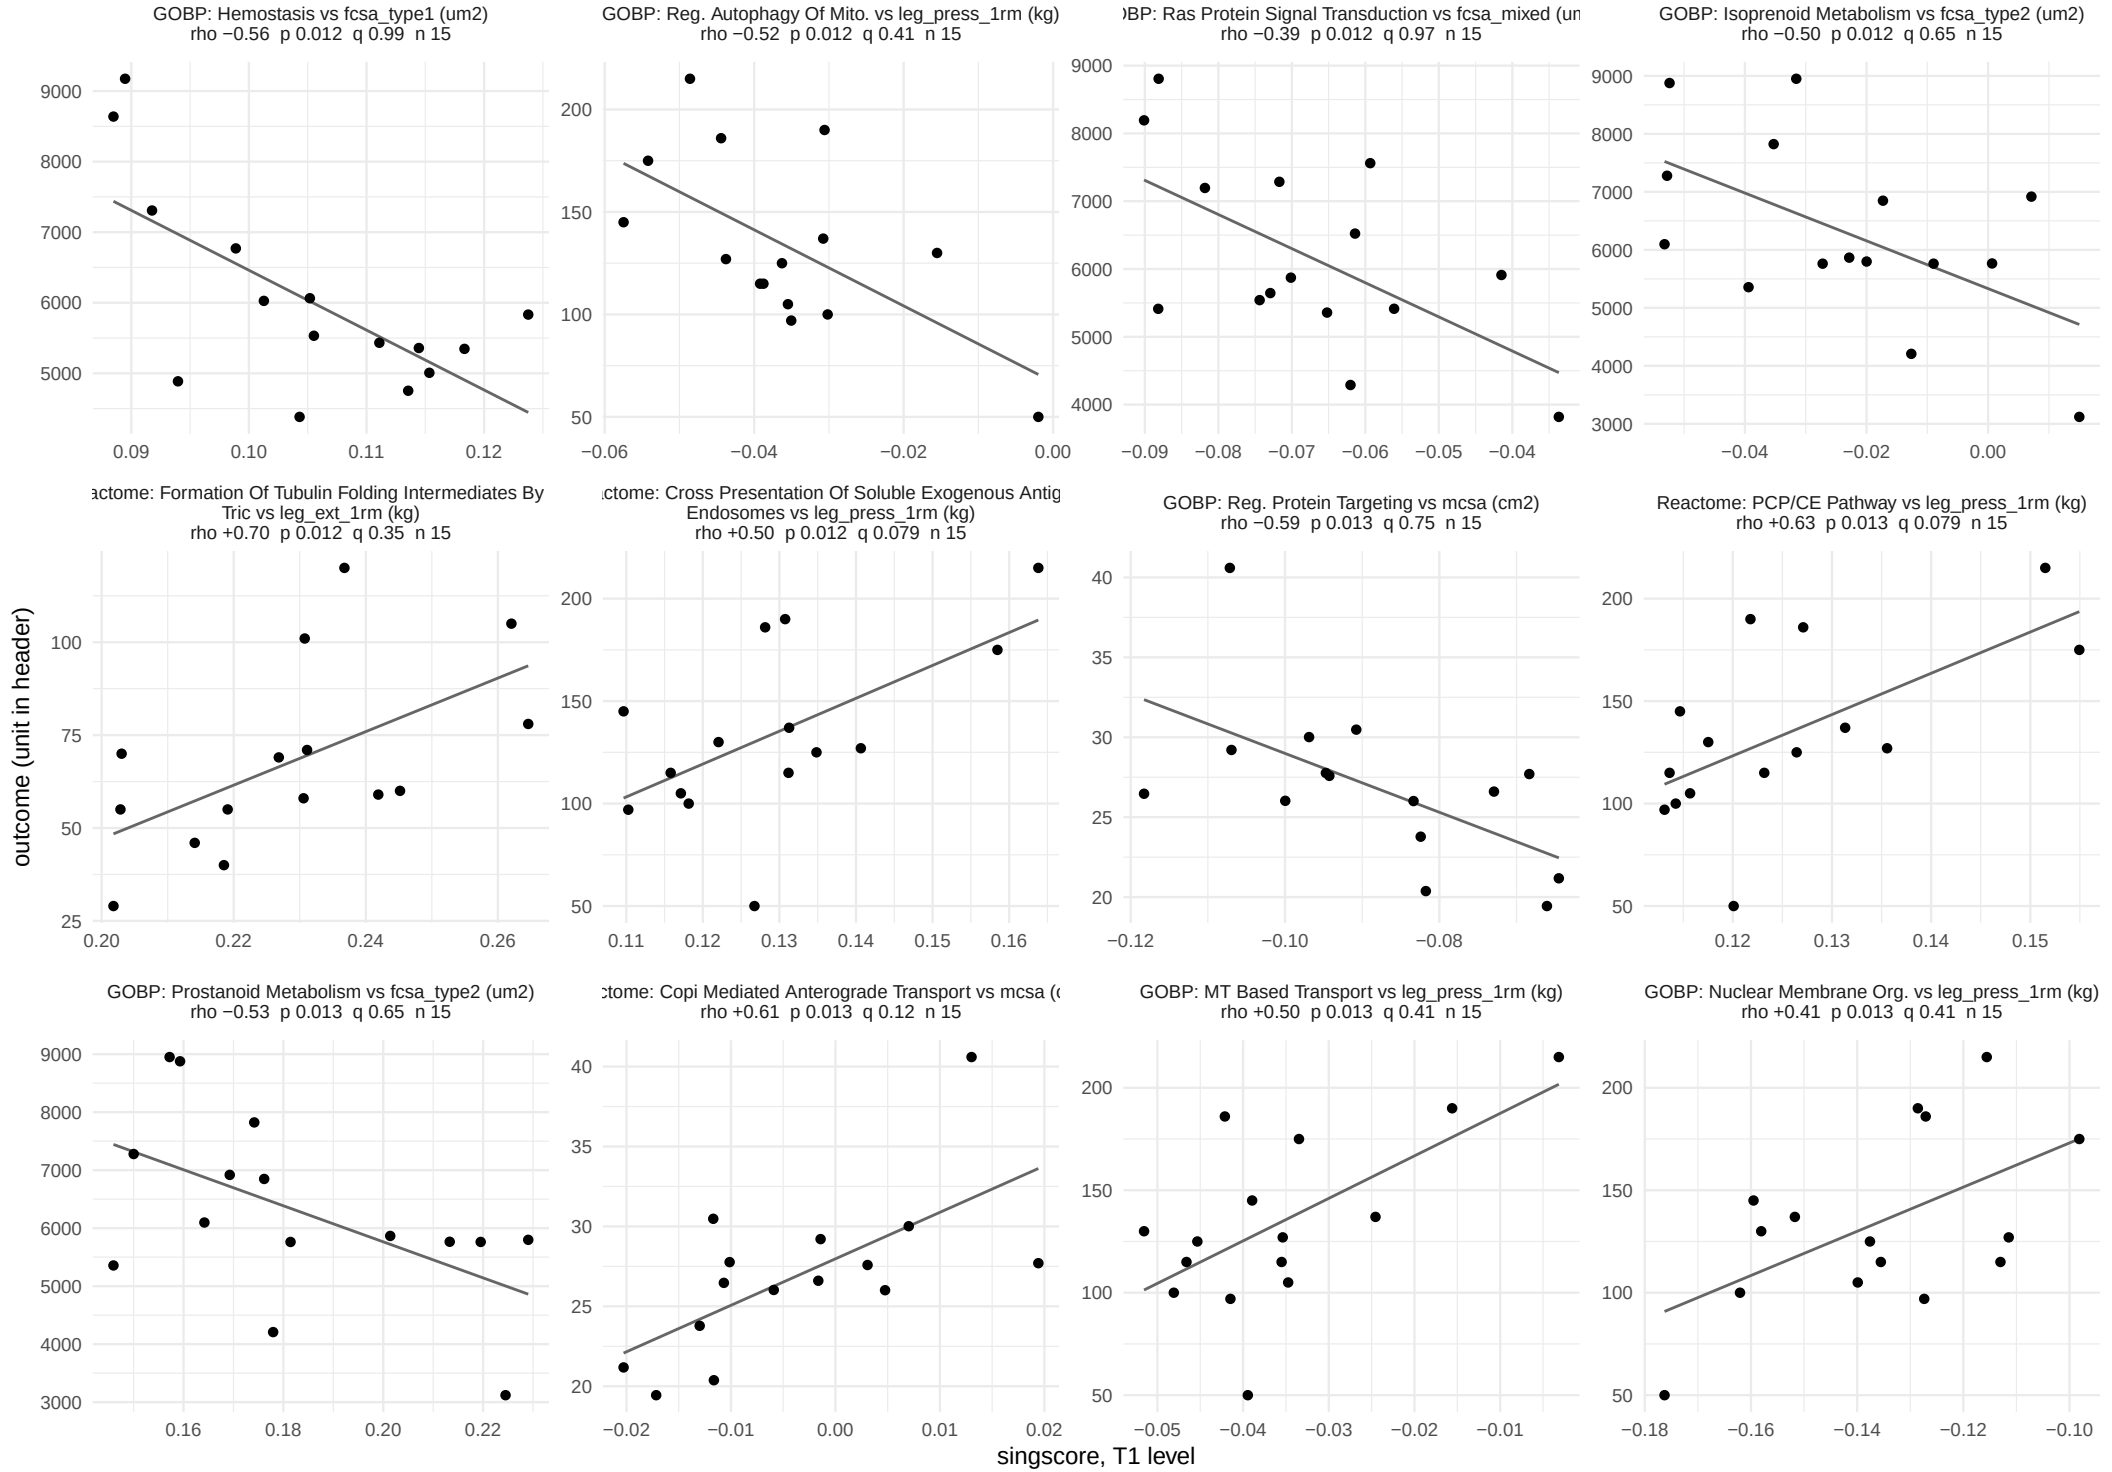

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, baseline_level window


673 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 14 of 57.

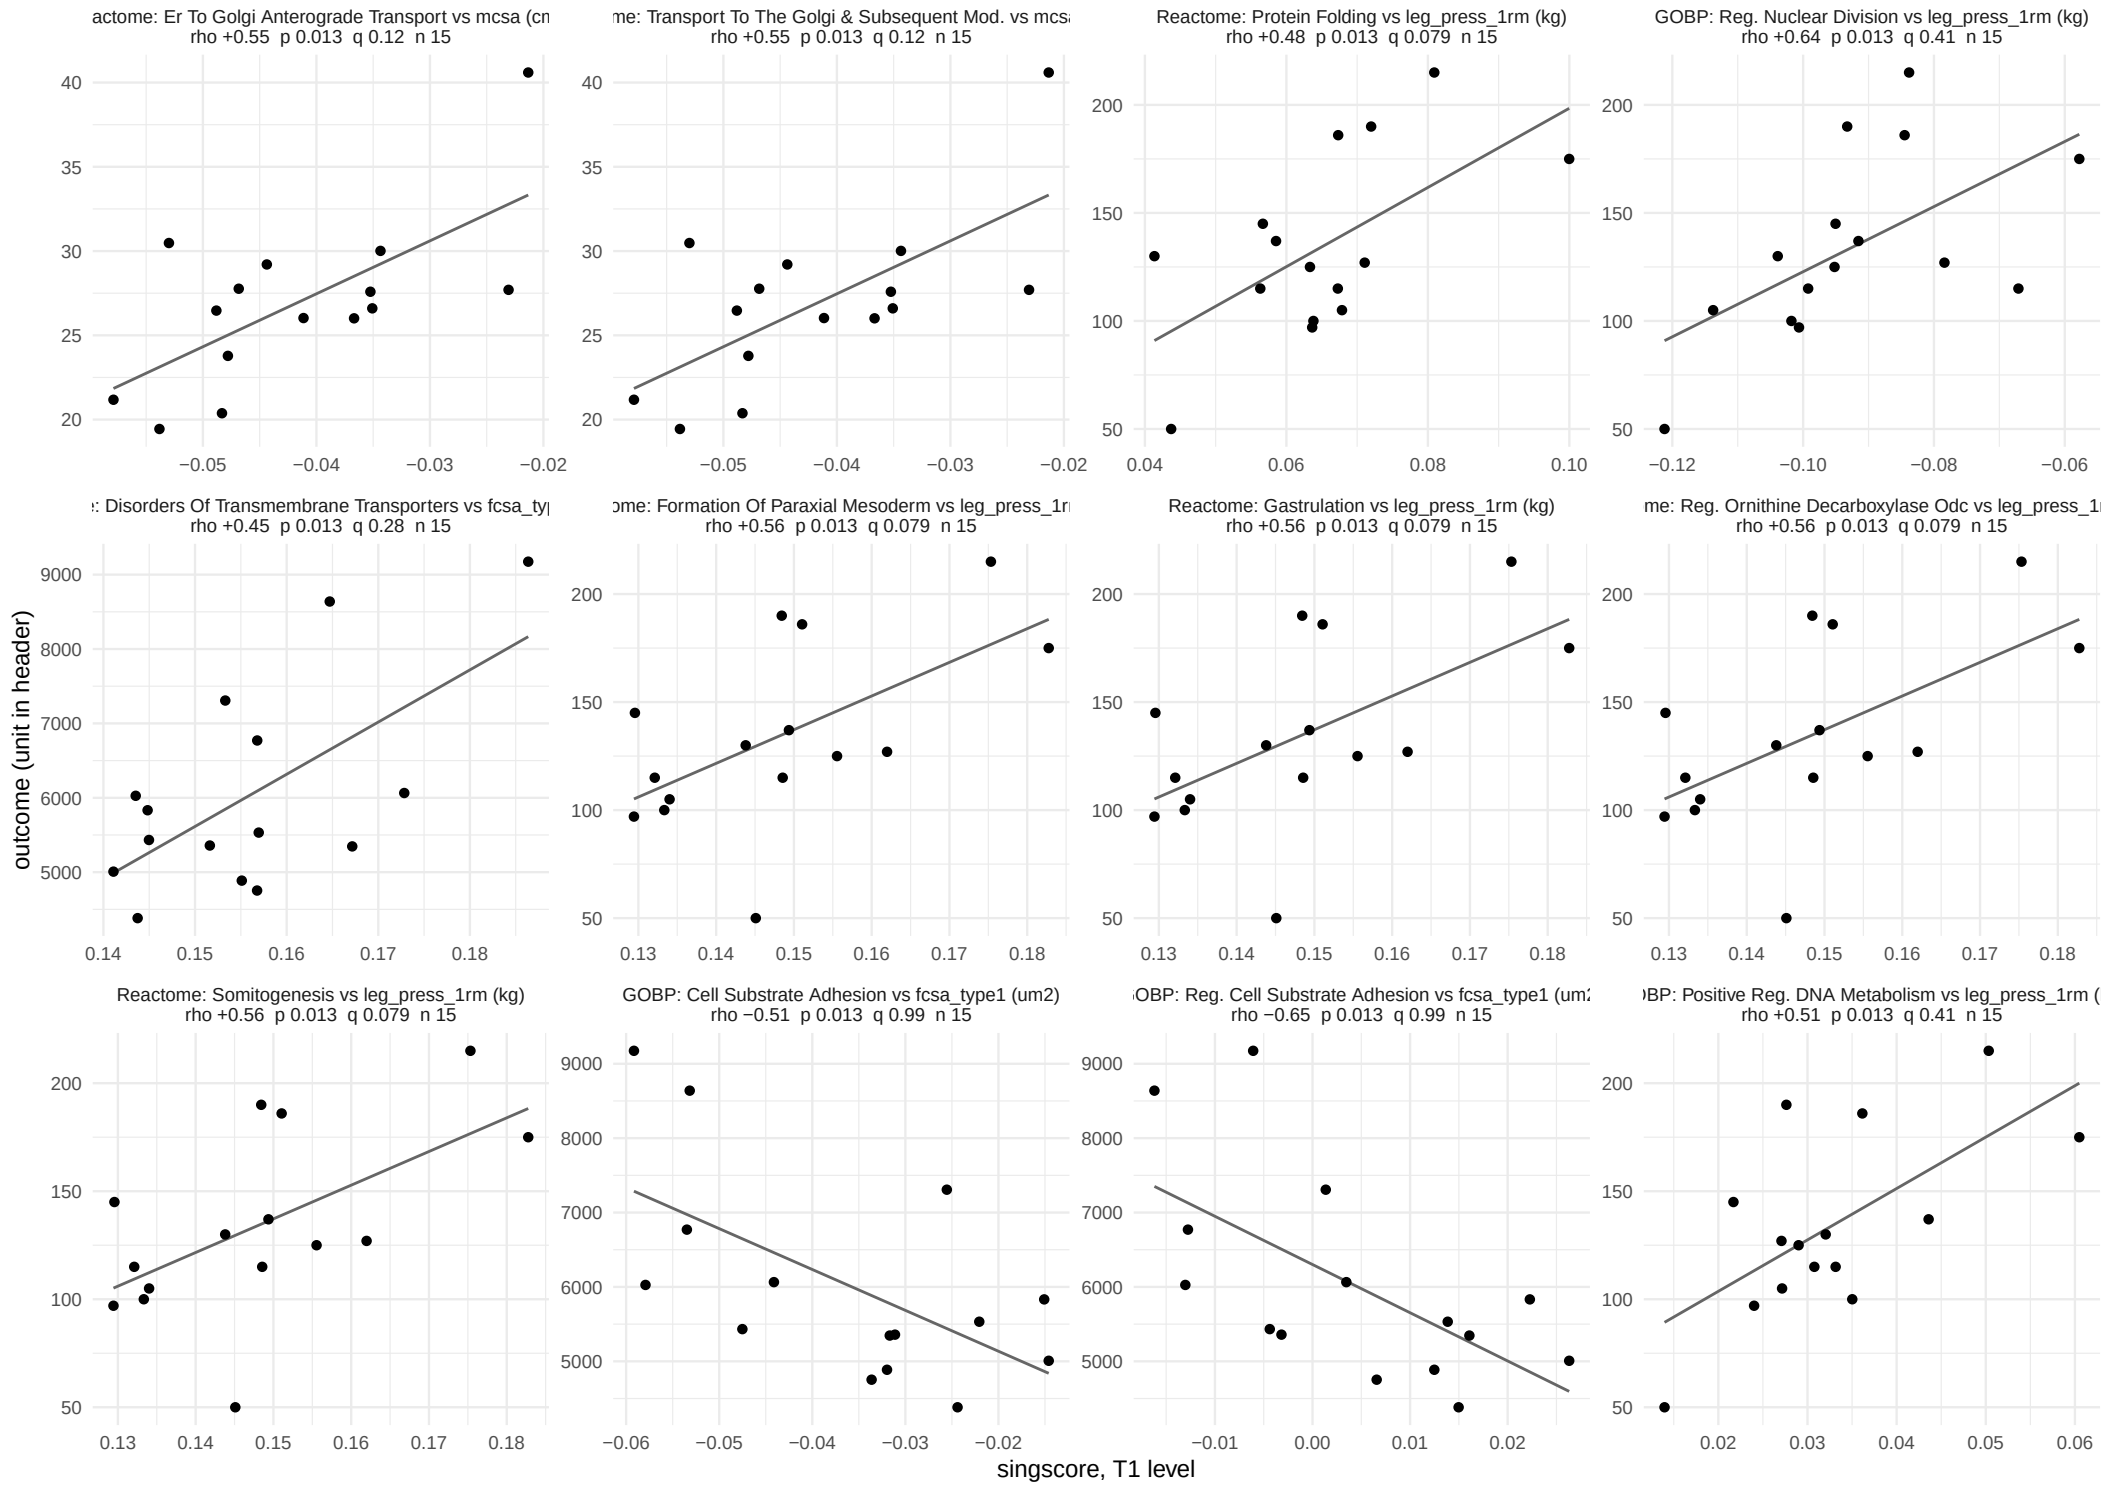

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, baseline_level window


673 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 15 of 57.

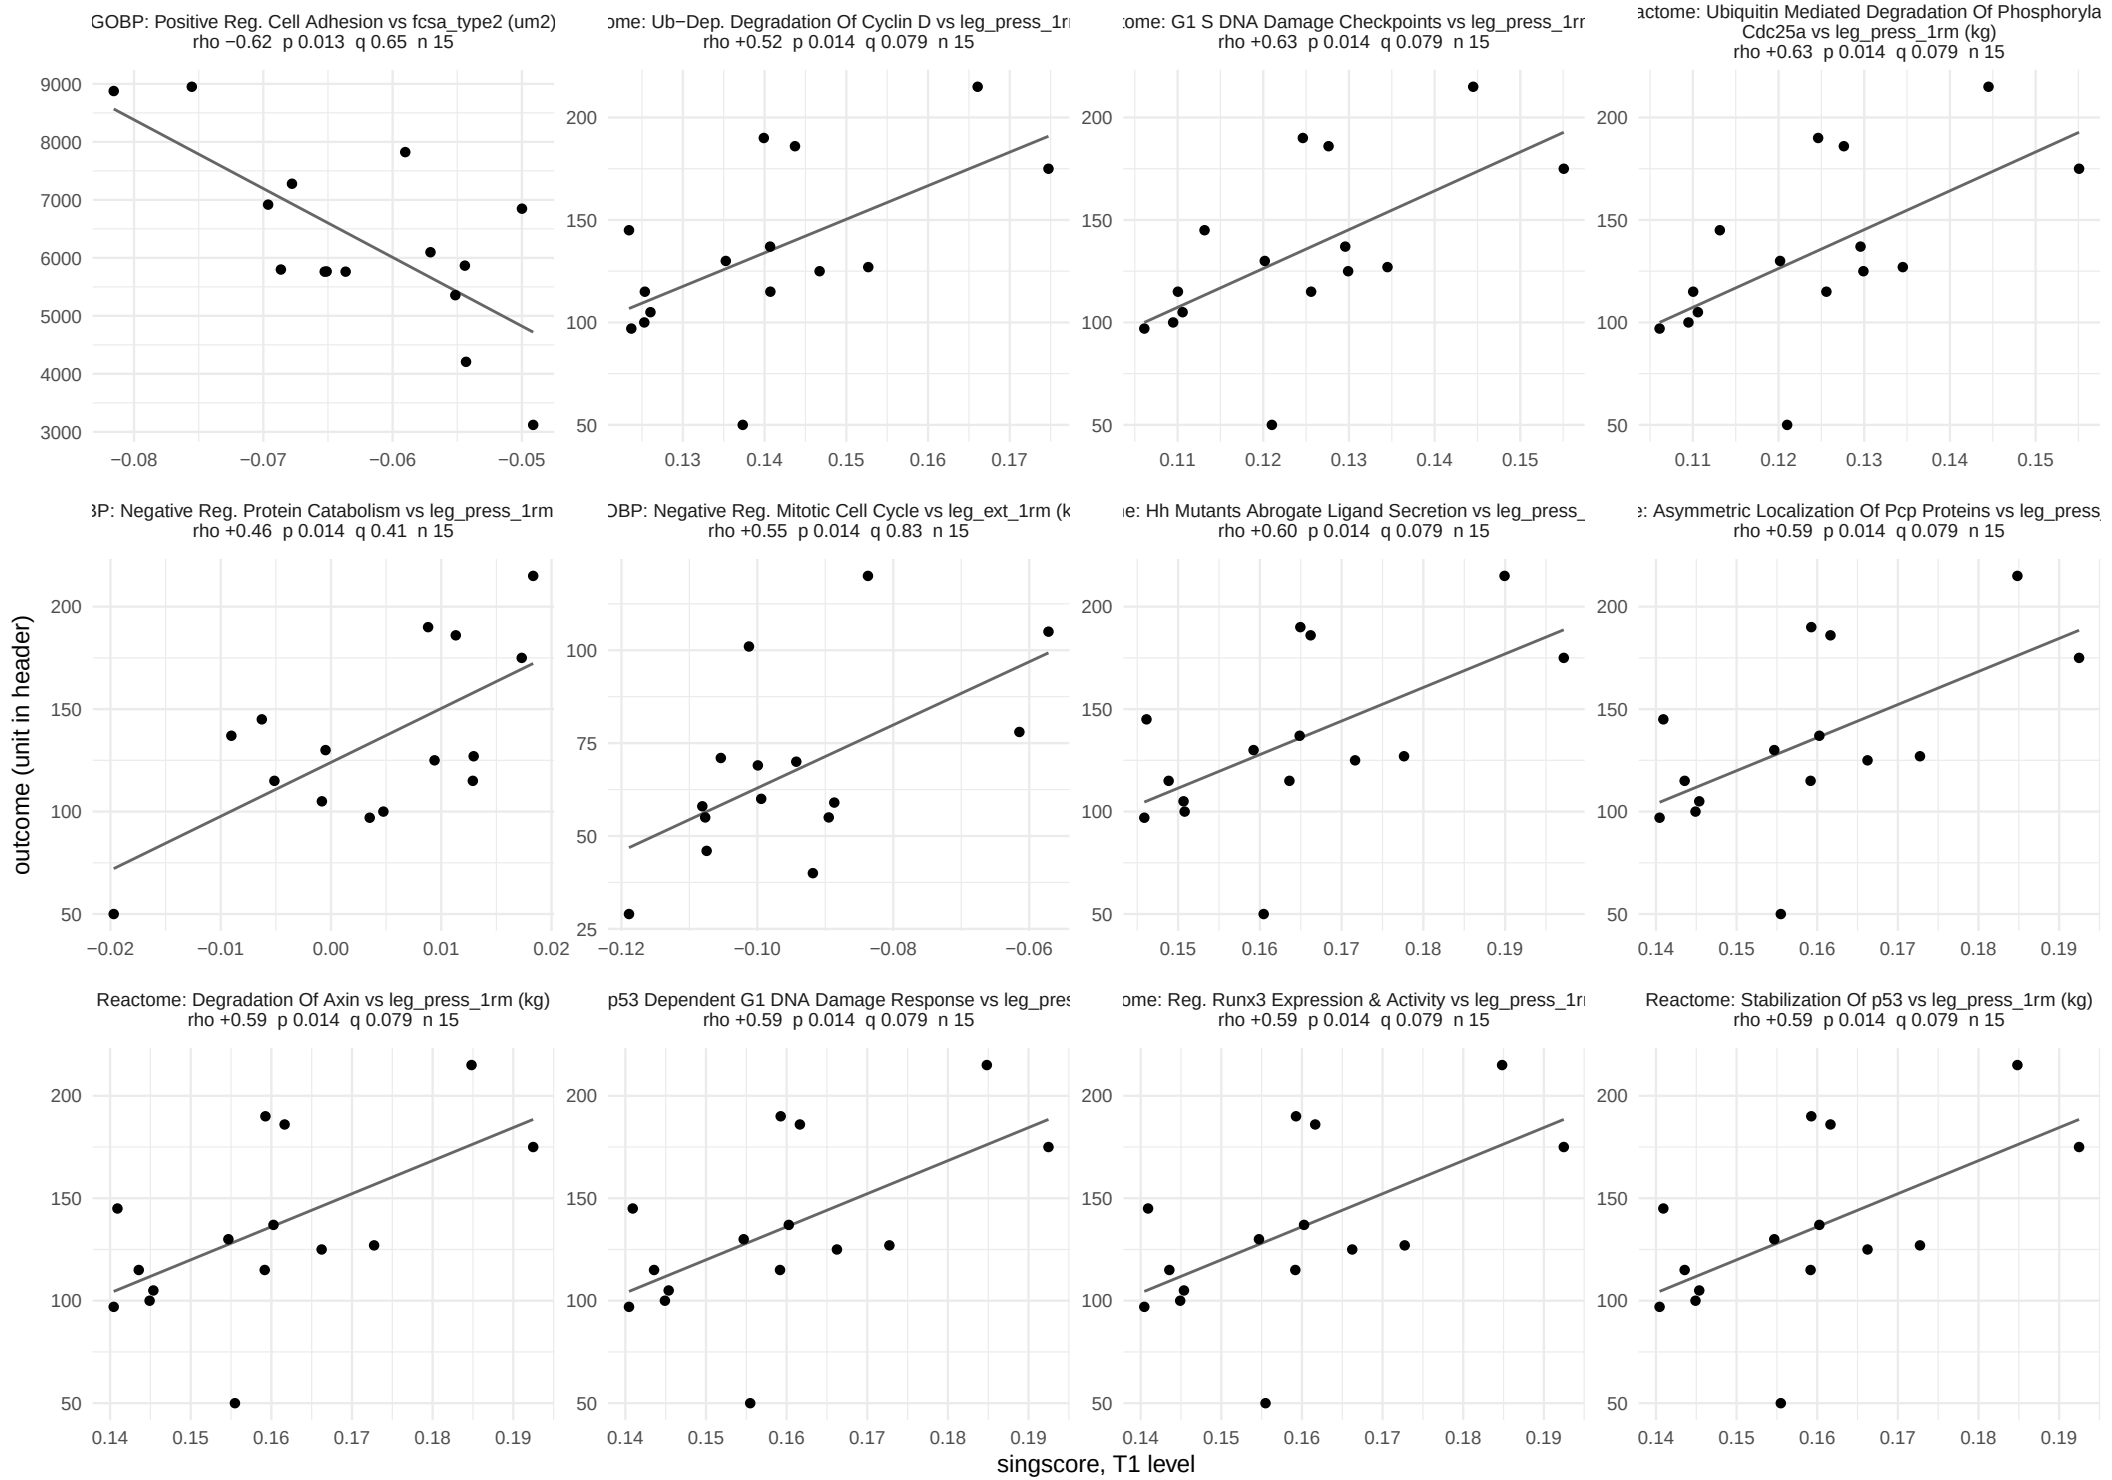

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, baseline_level window


673 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 16 of 57.

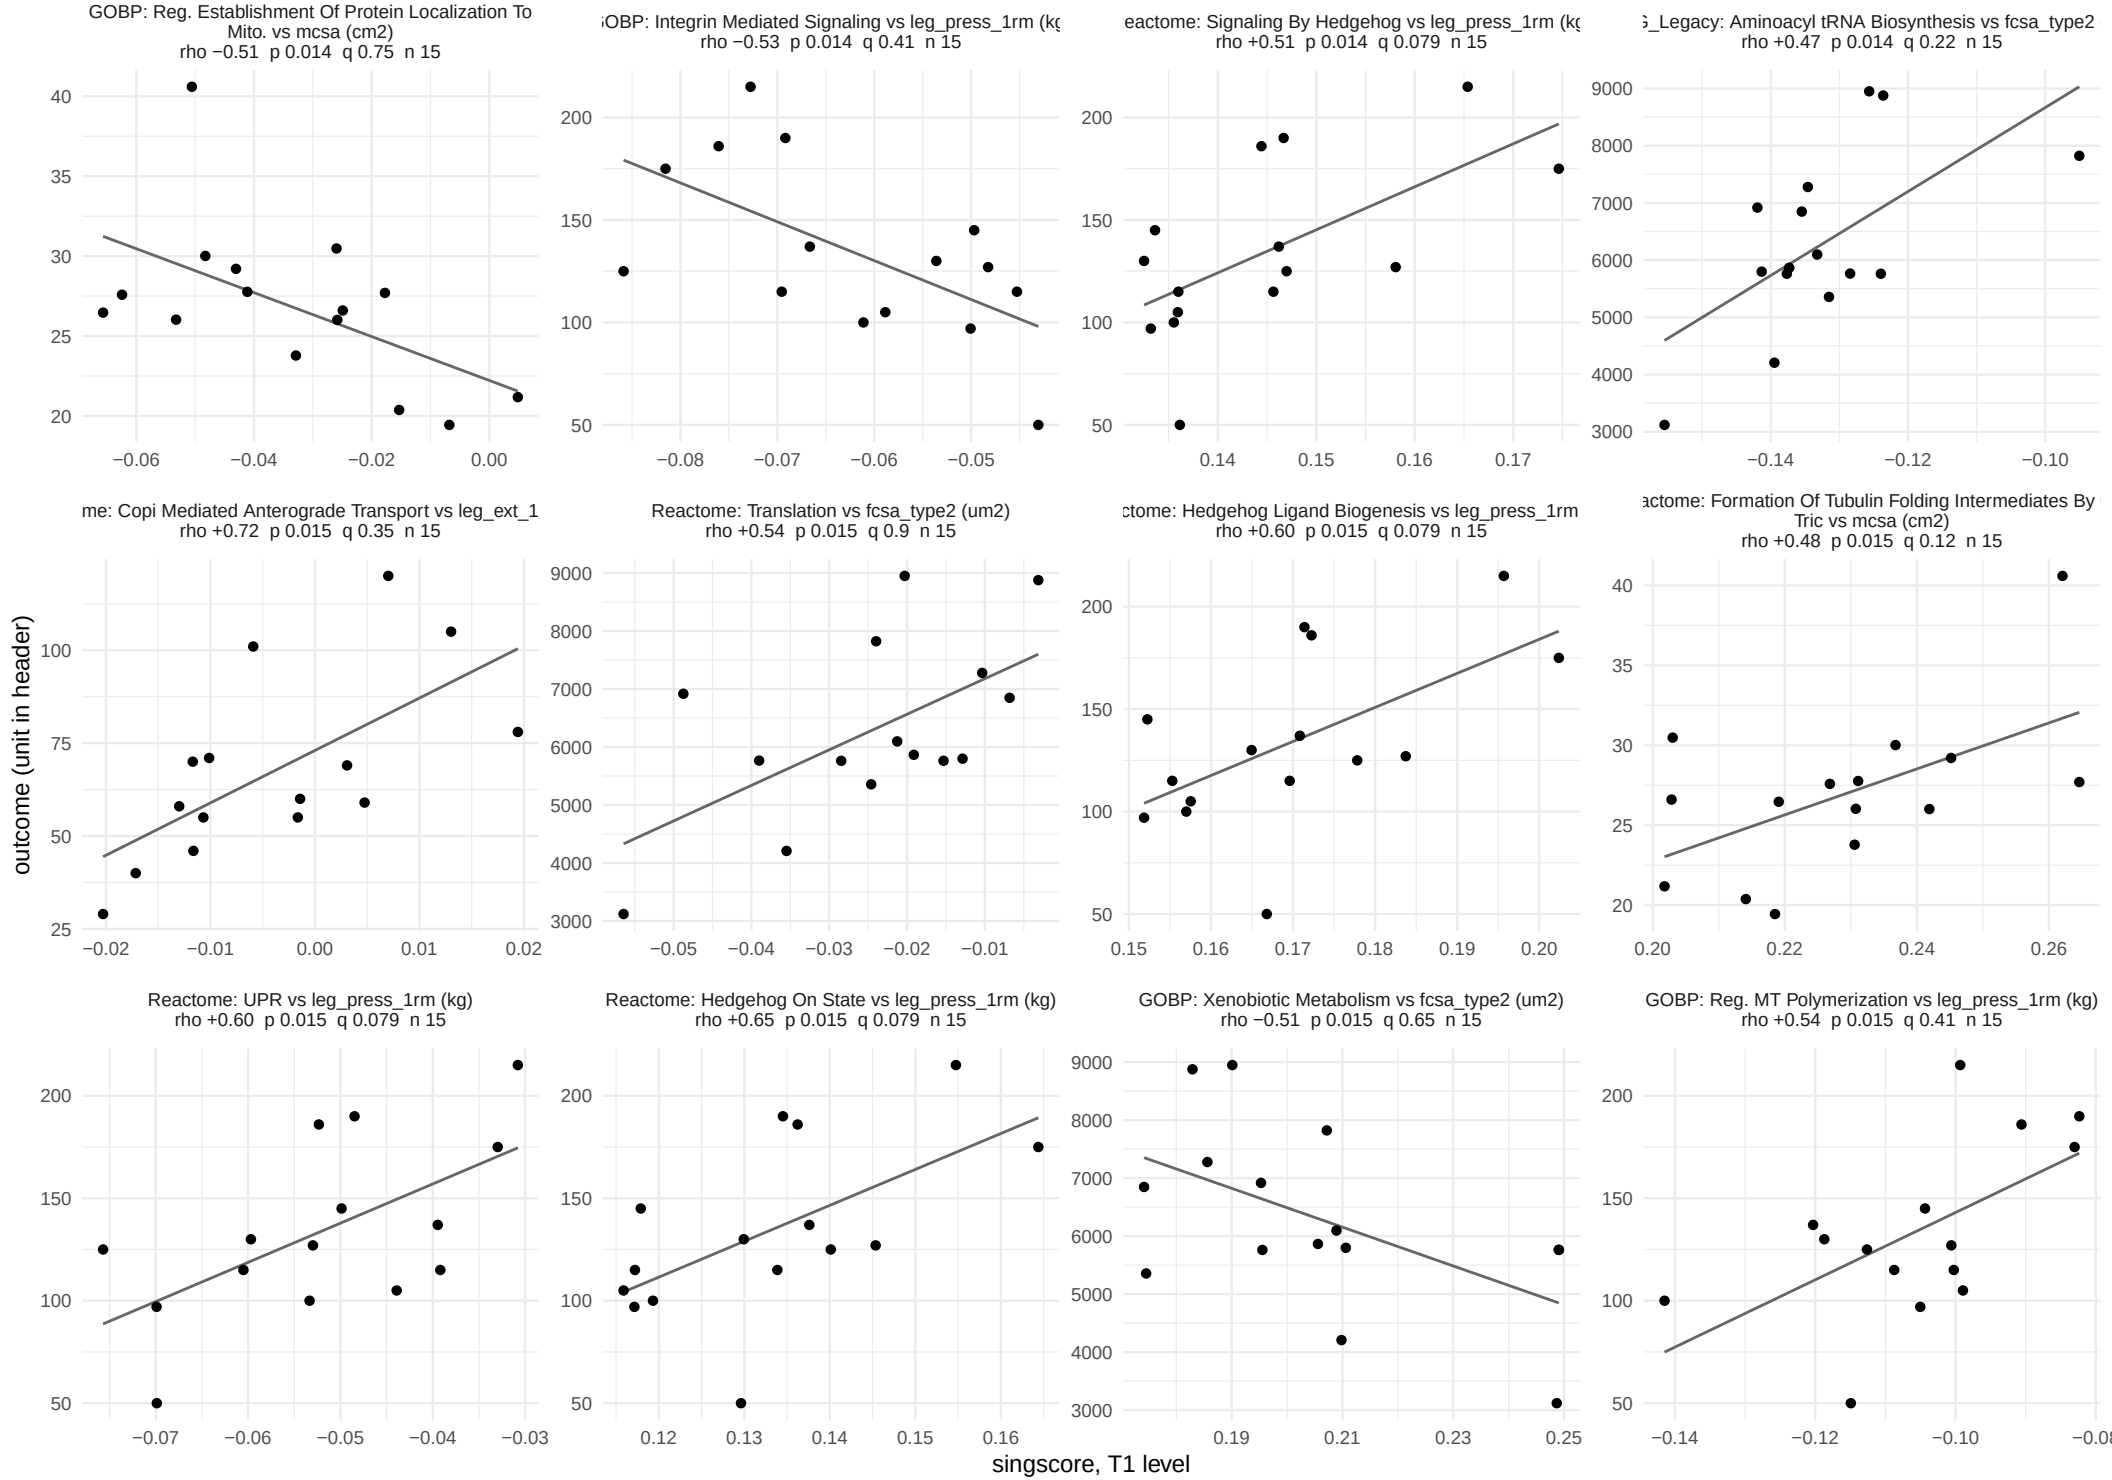

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, baseline_level window


673 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 17 of 57.

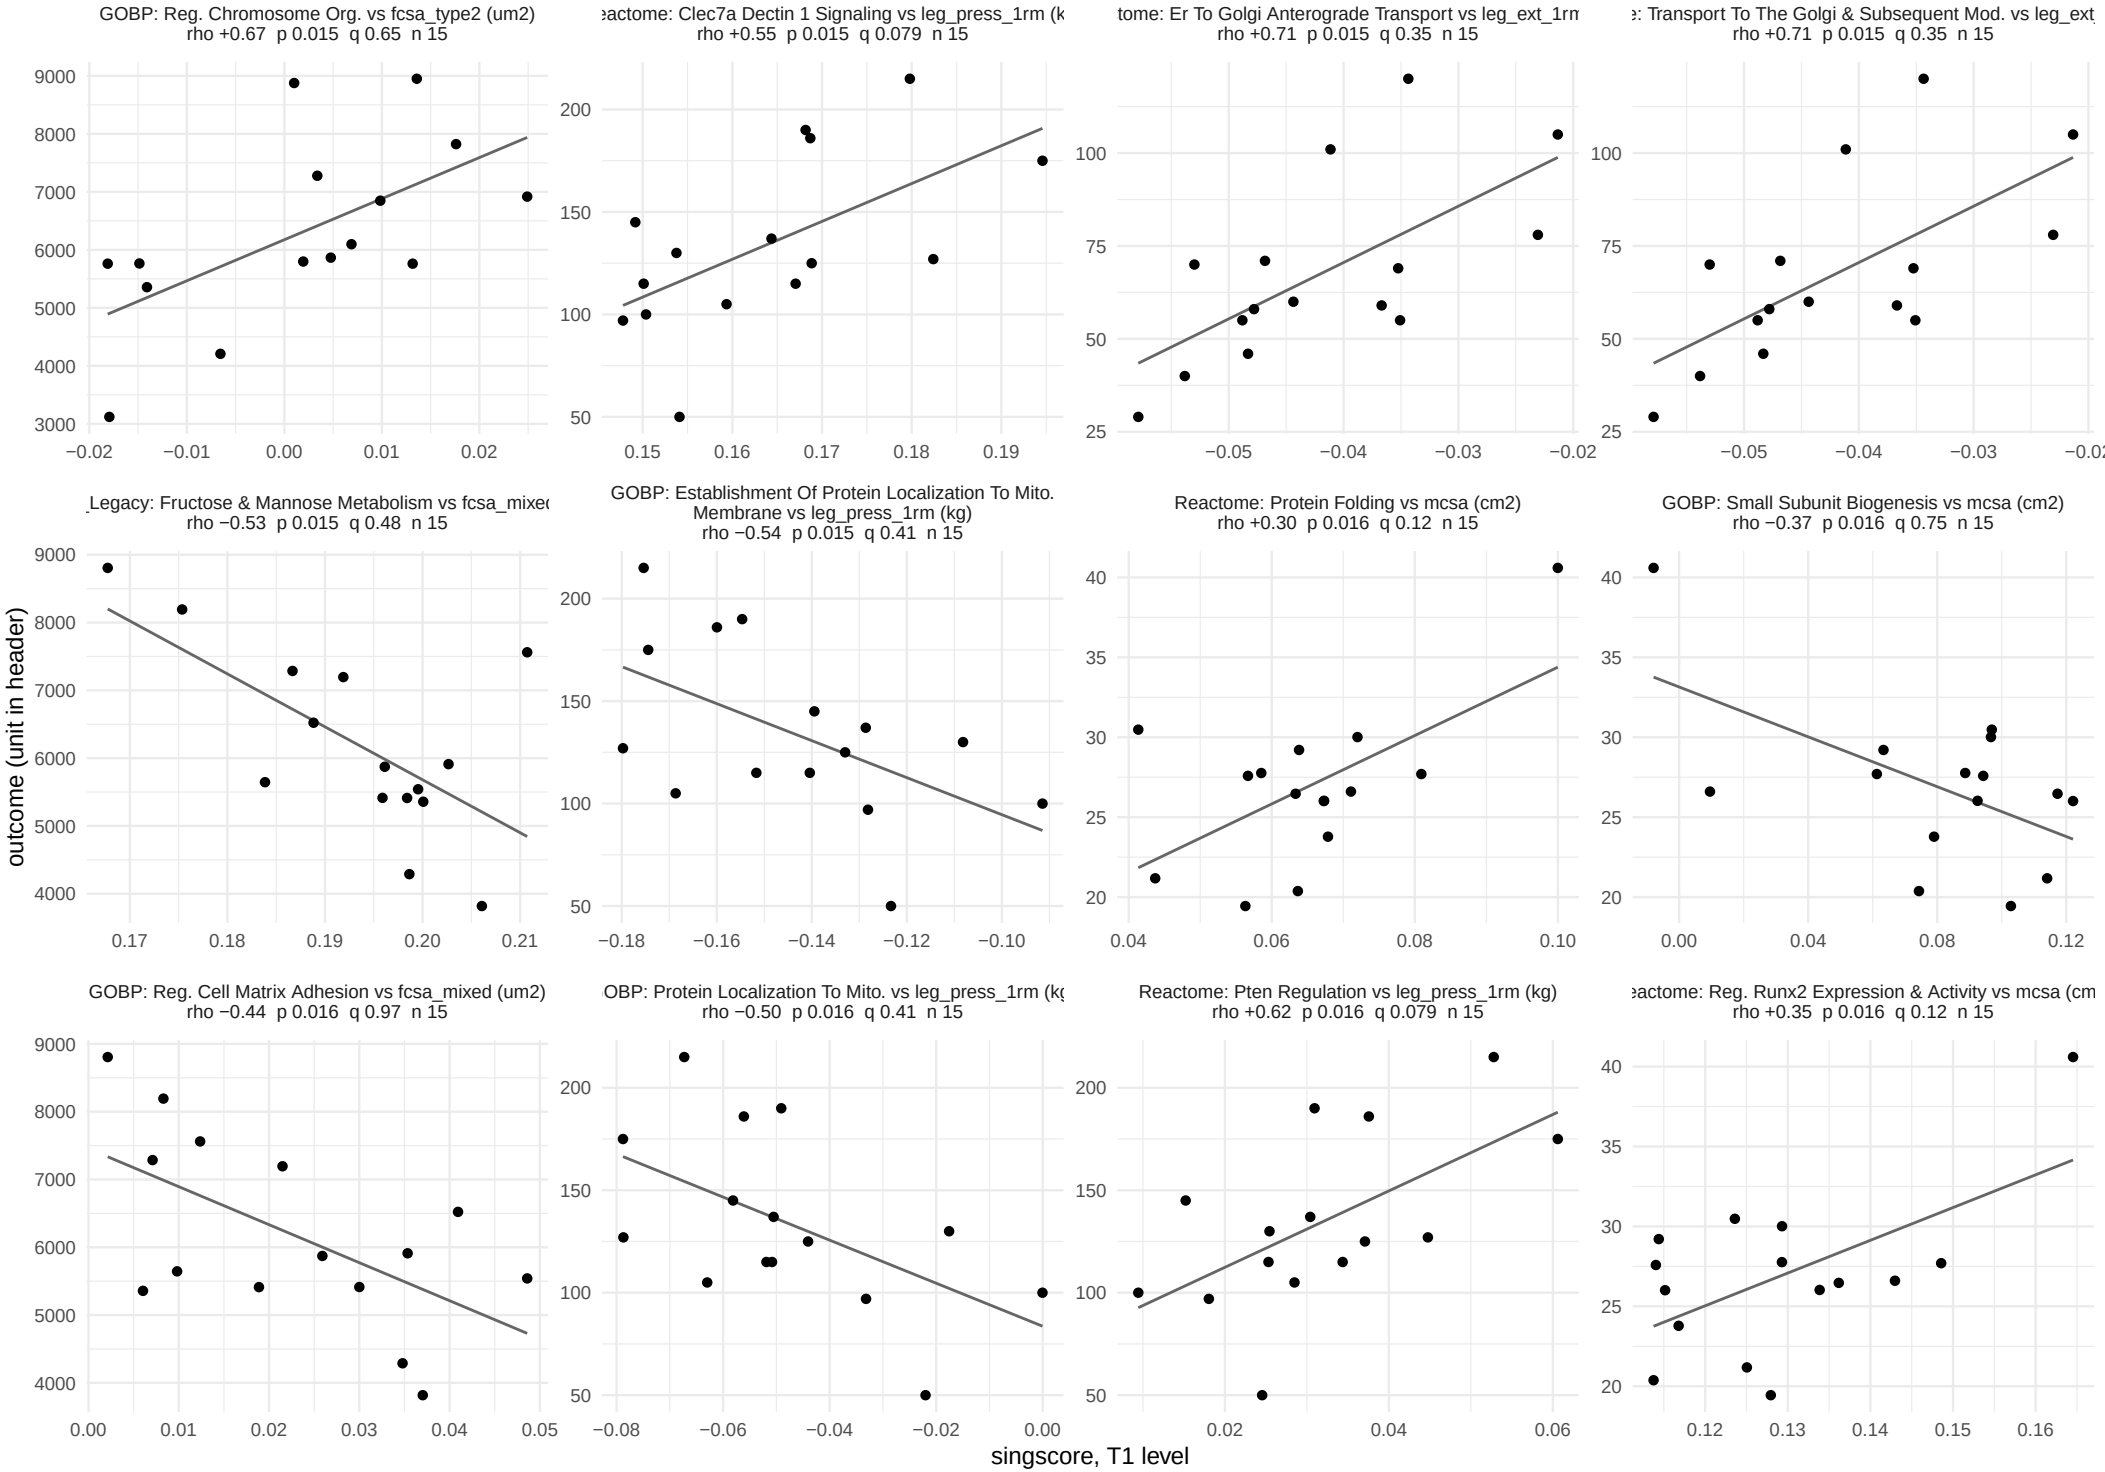

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, baseline_level window


673 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 18 of 57.

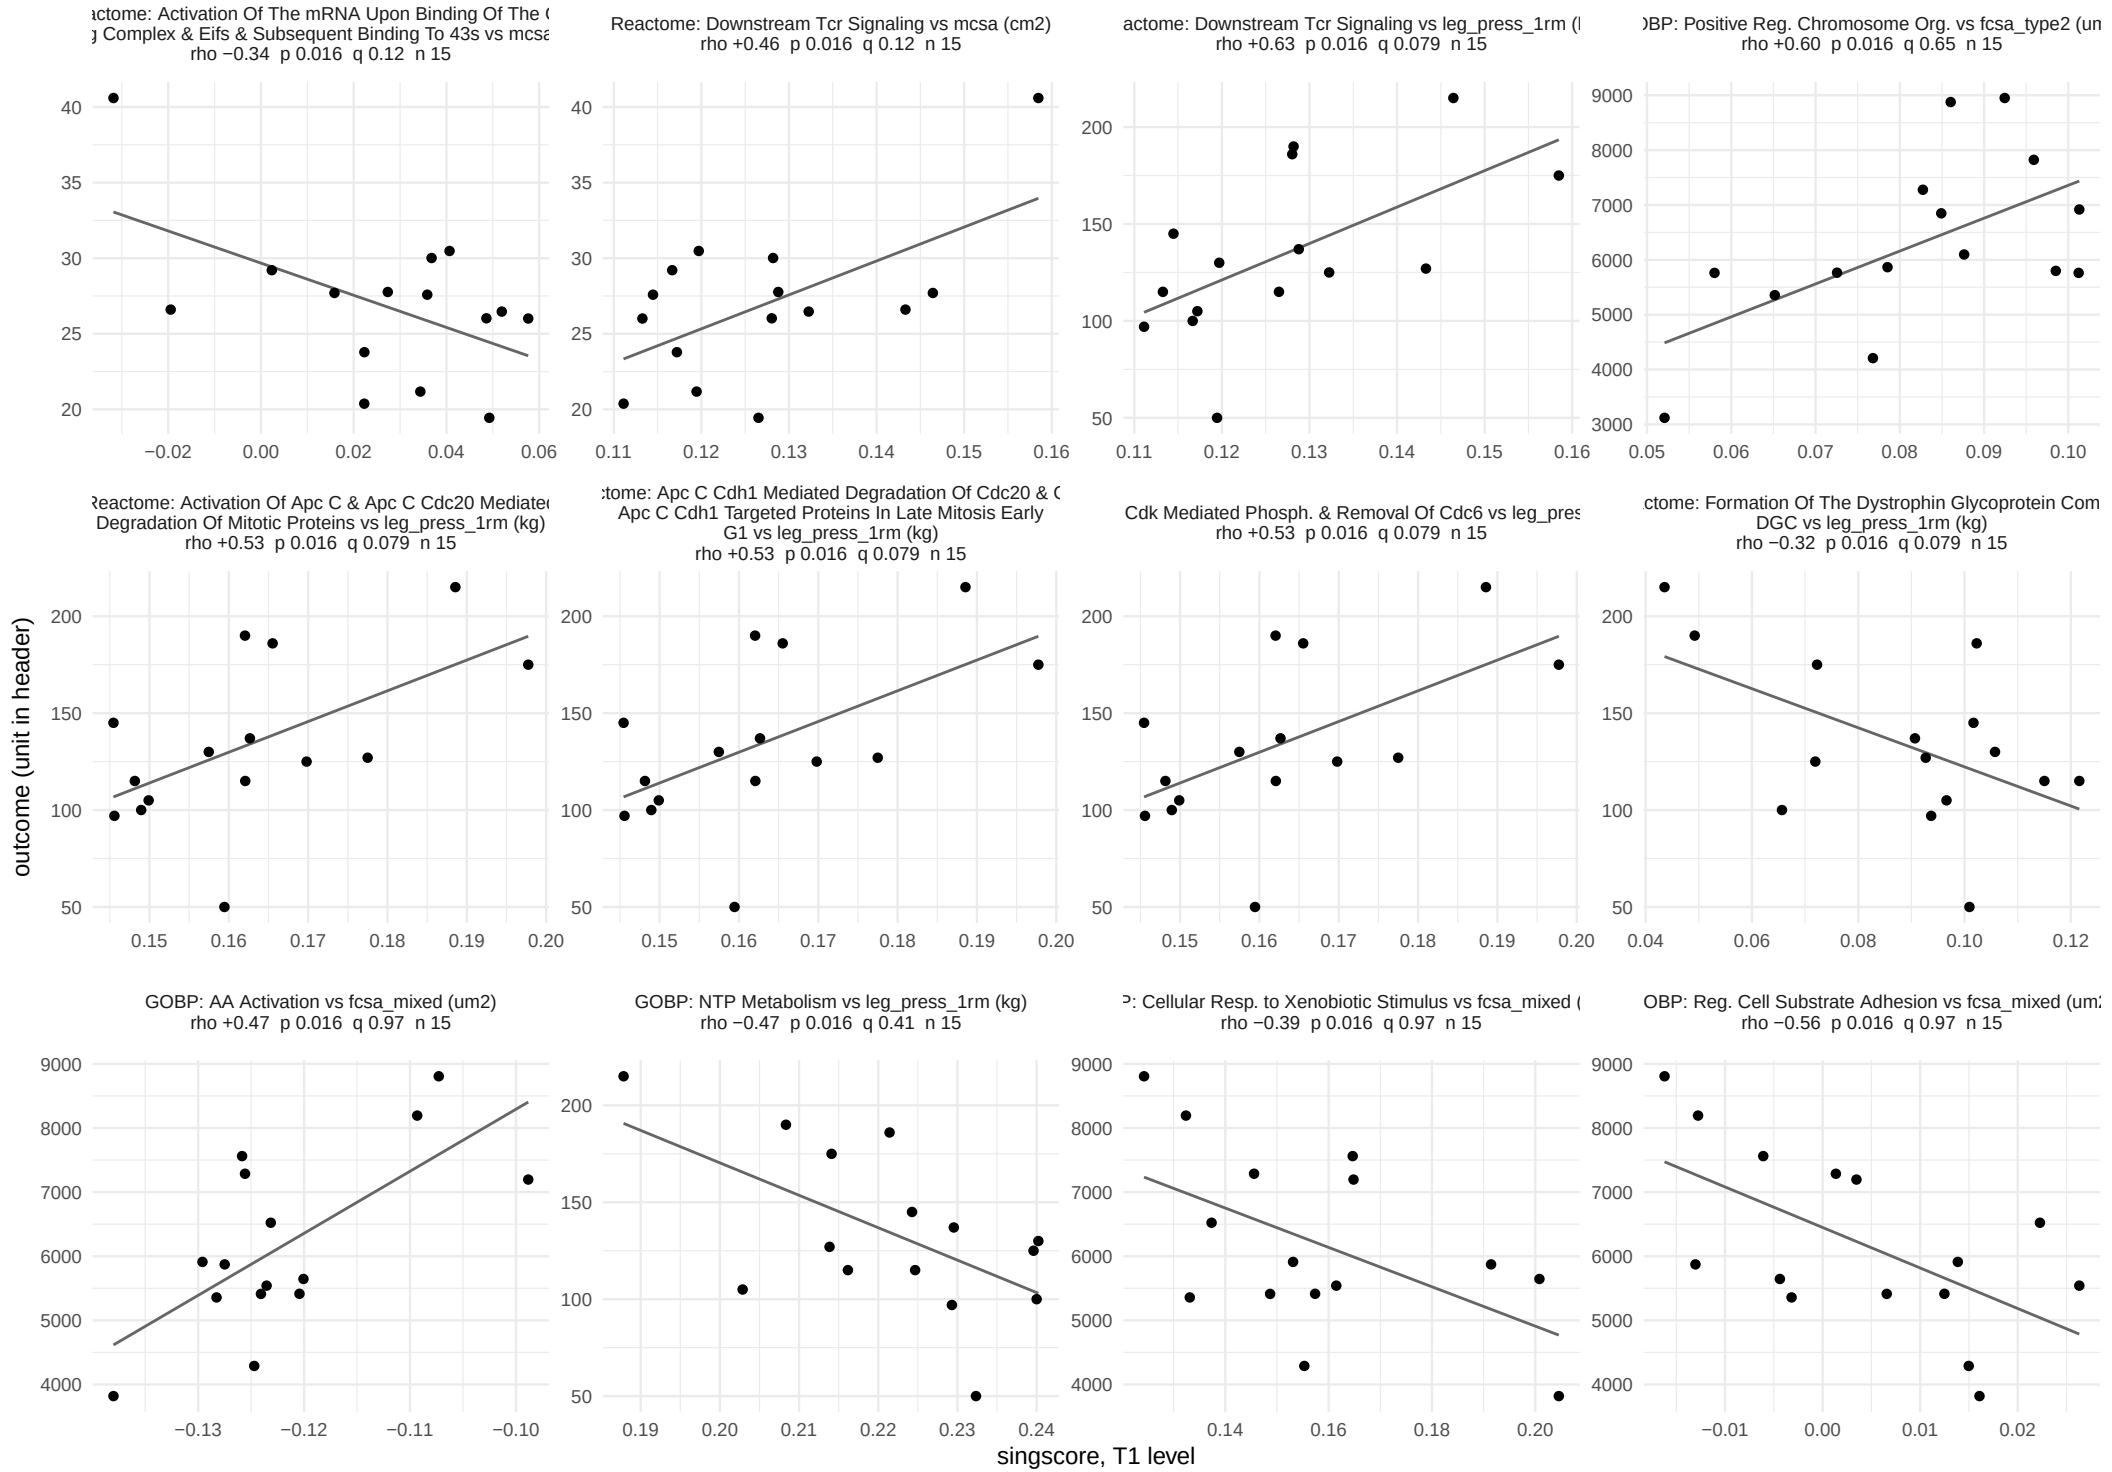

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, baseline_level window


673 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 19 of 57.

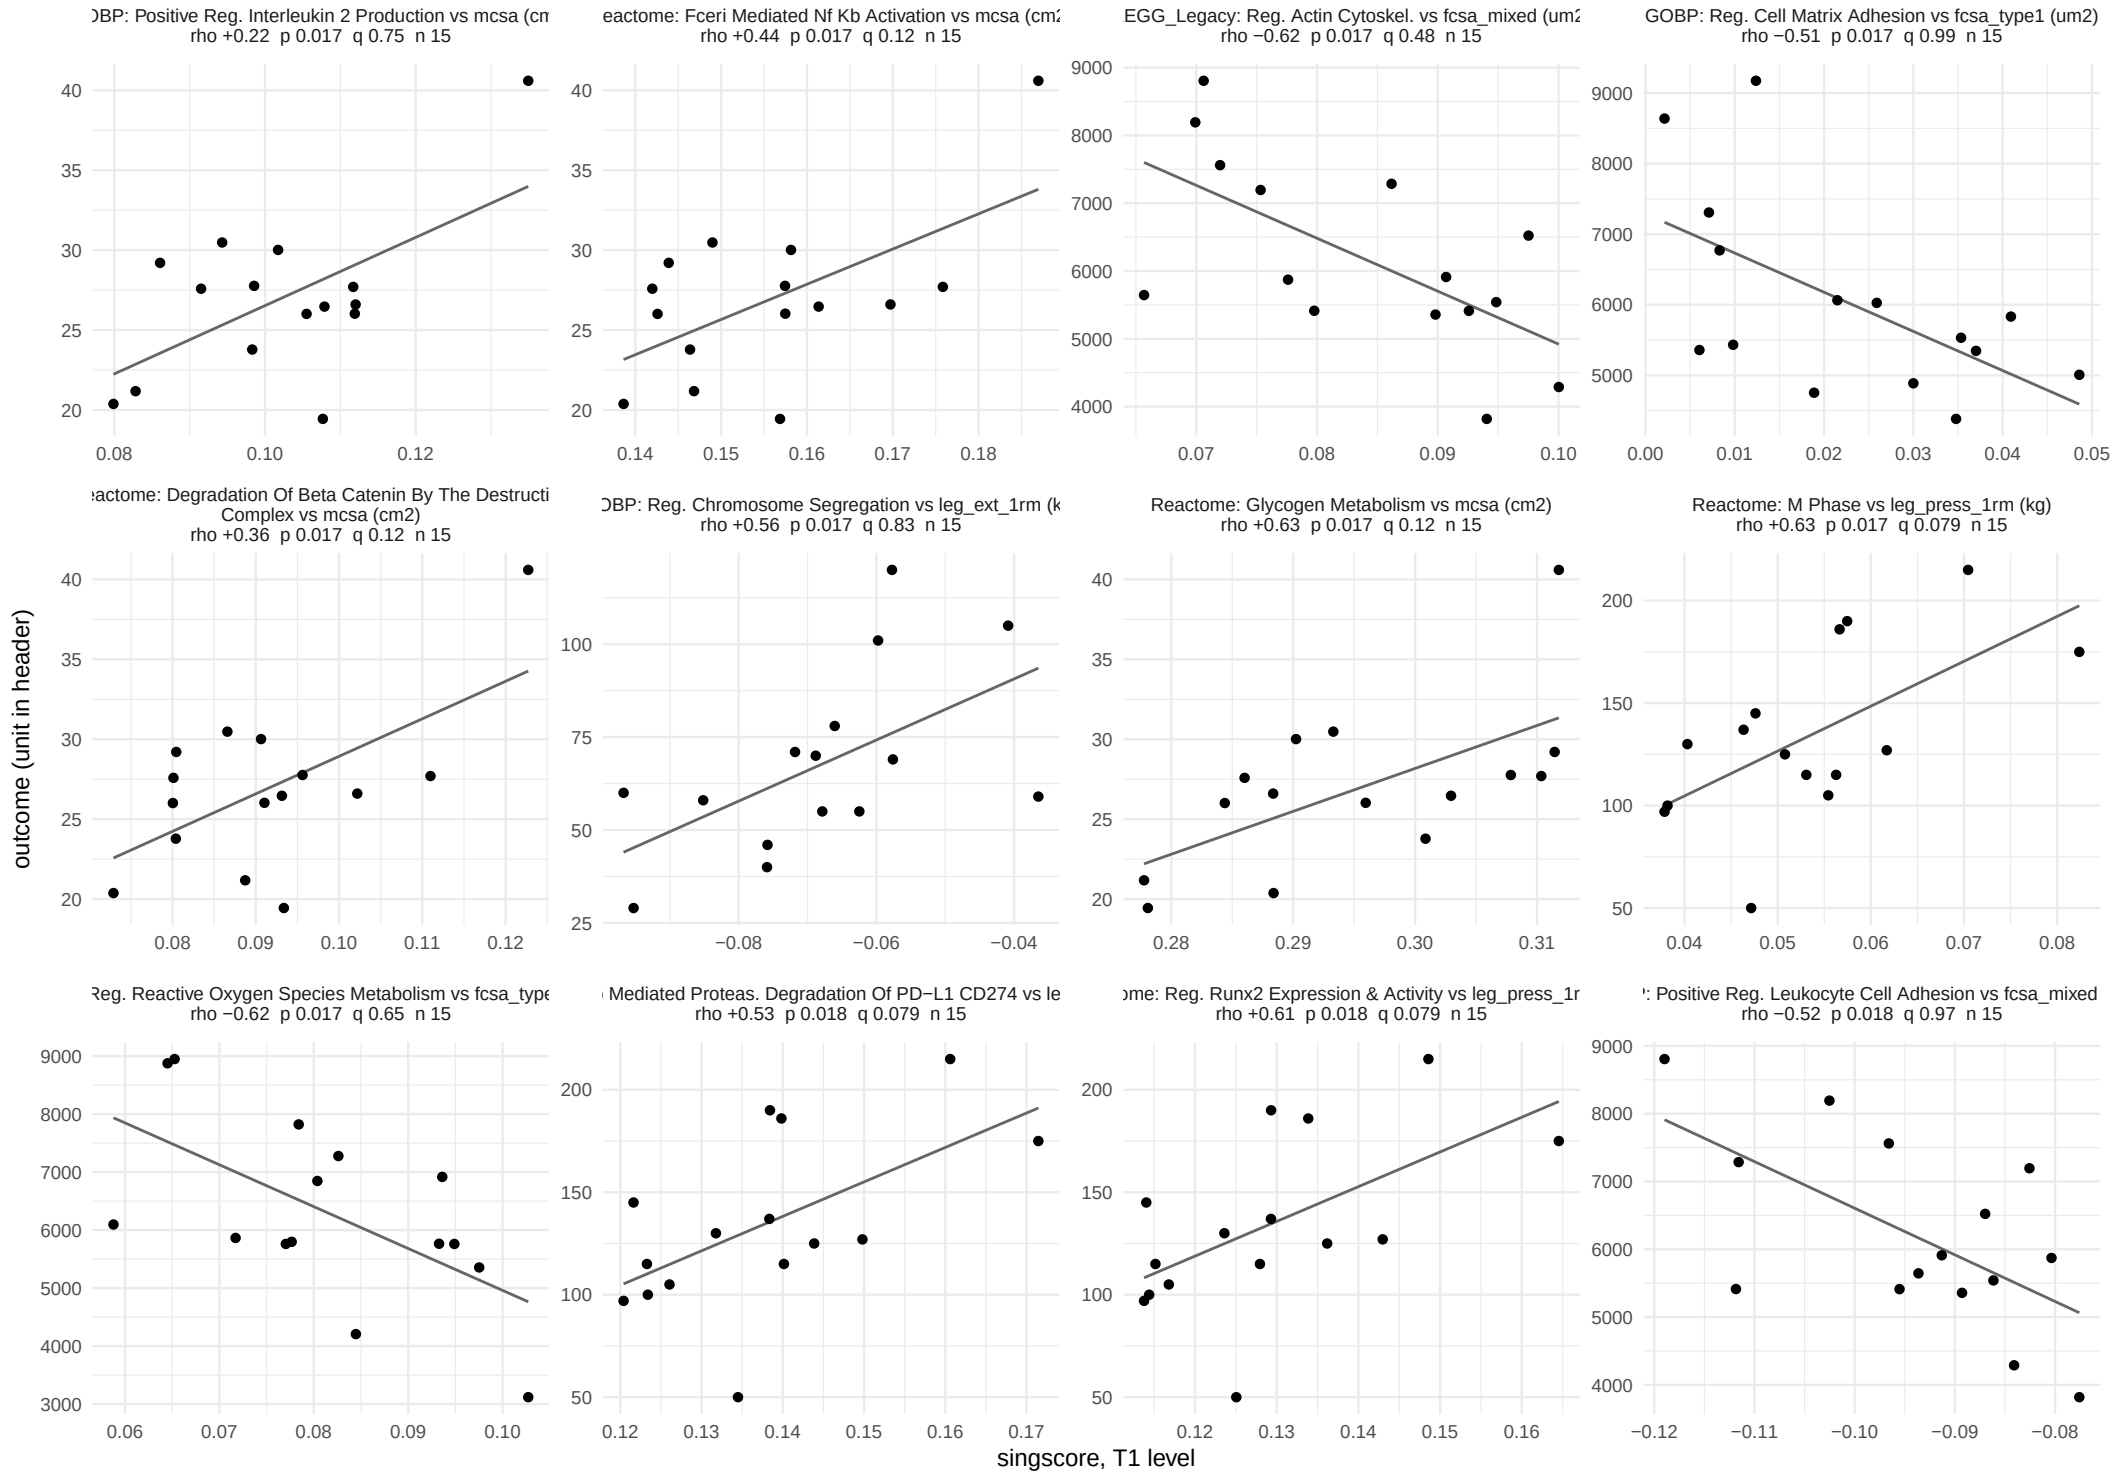

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, baseline_level window


673 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 20 of 57.

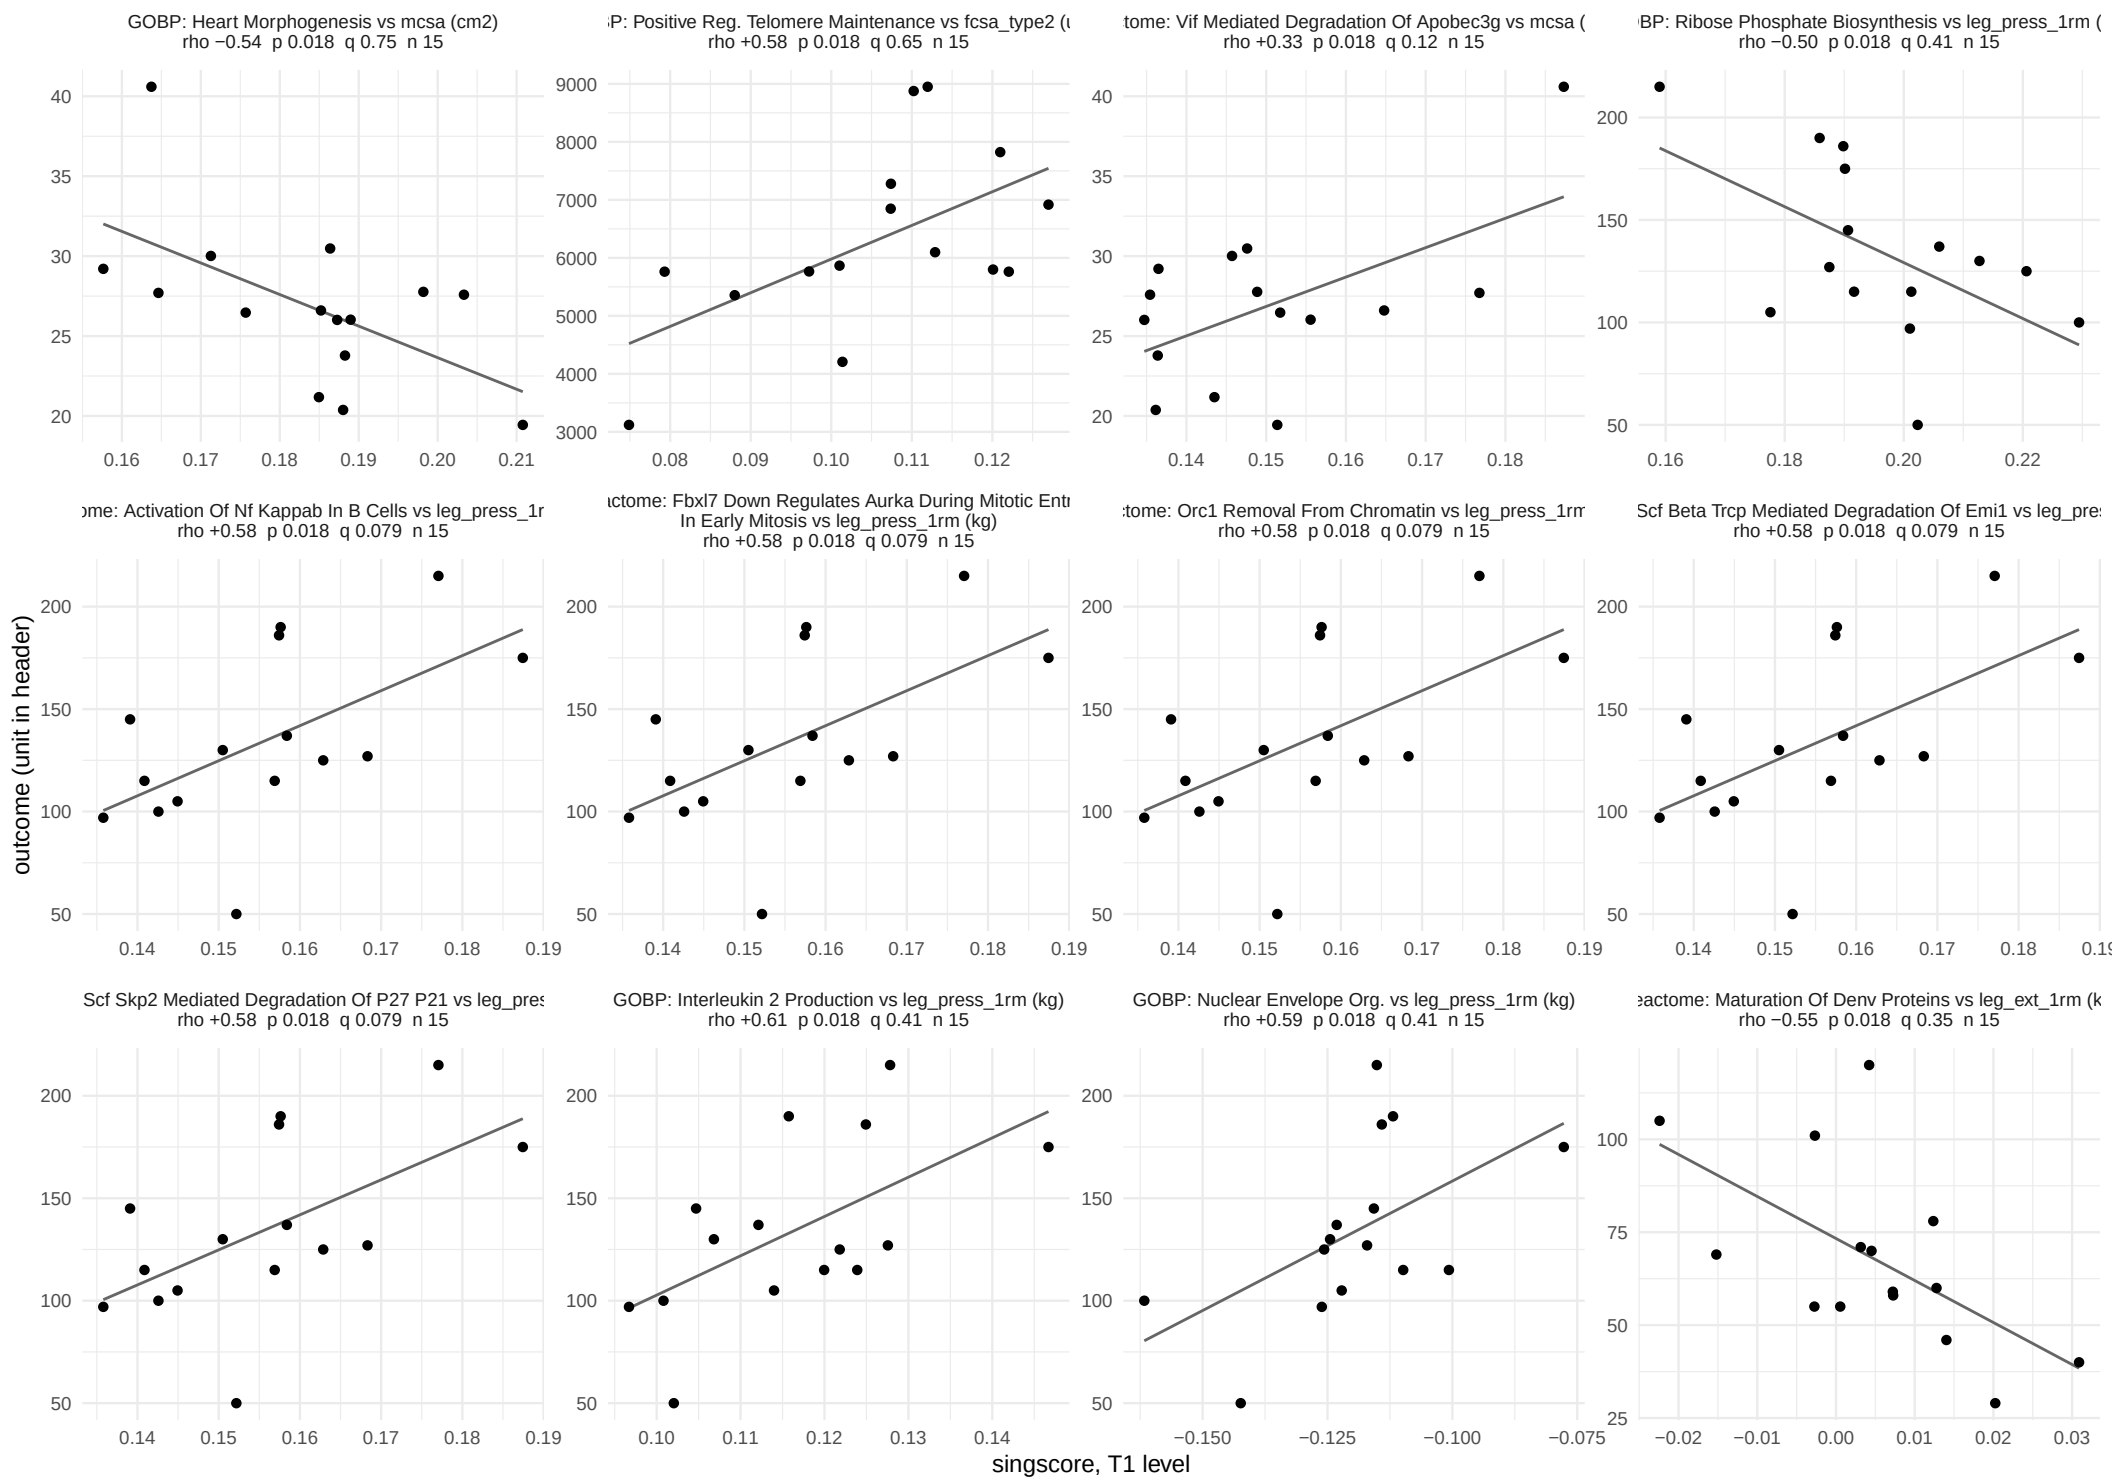

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, baseline_level window


673 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 21 of 57.

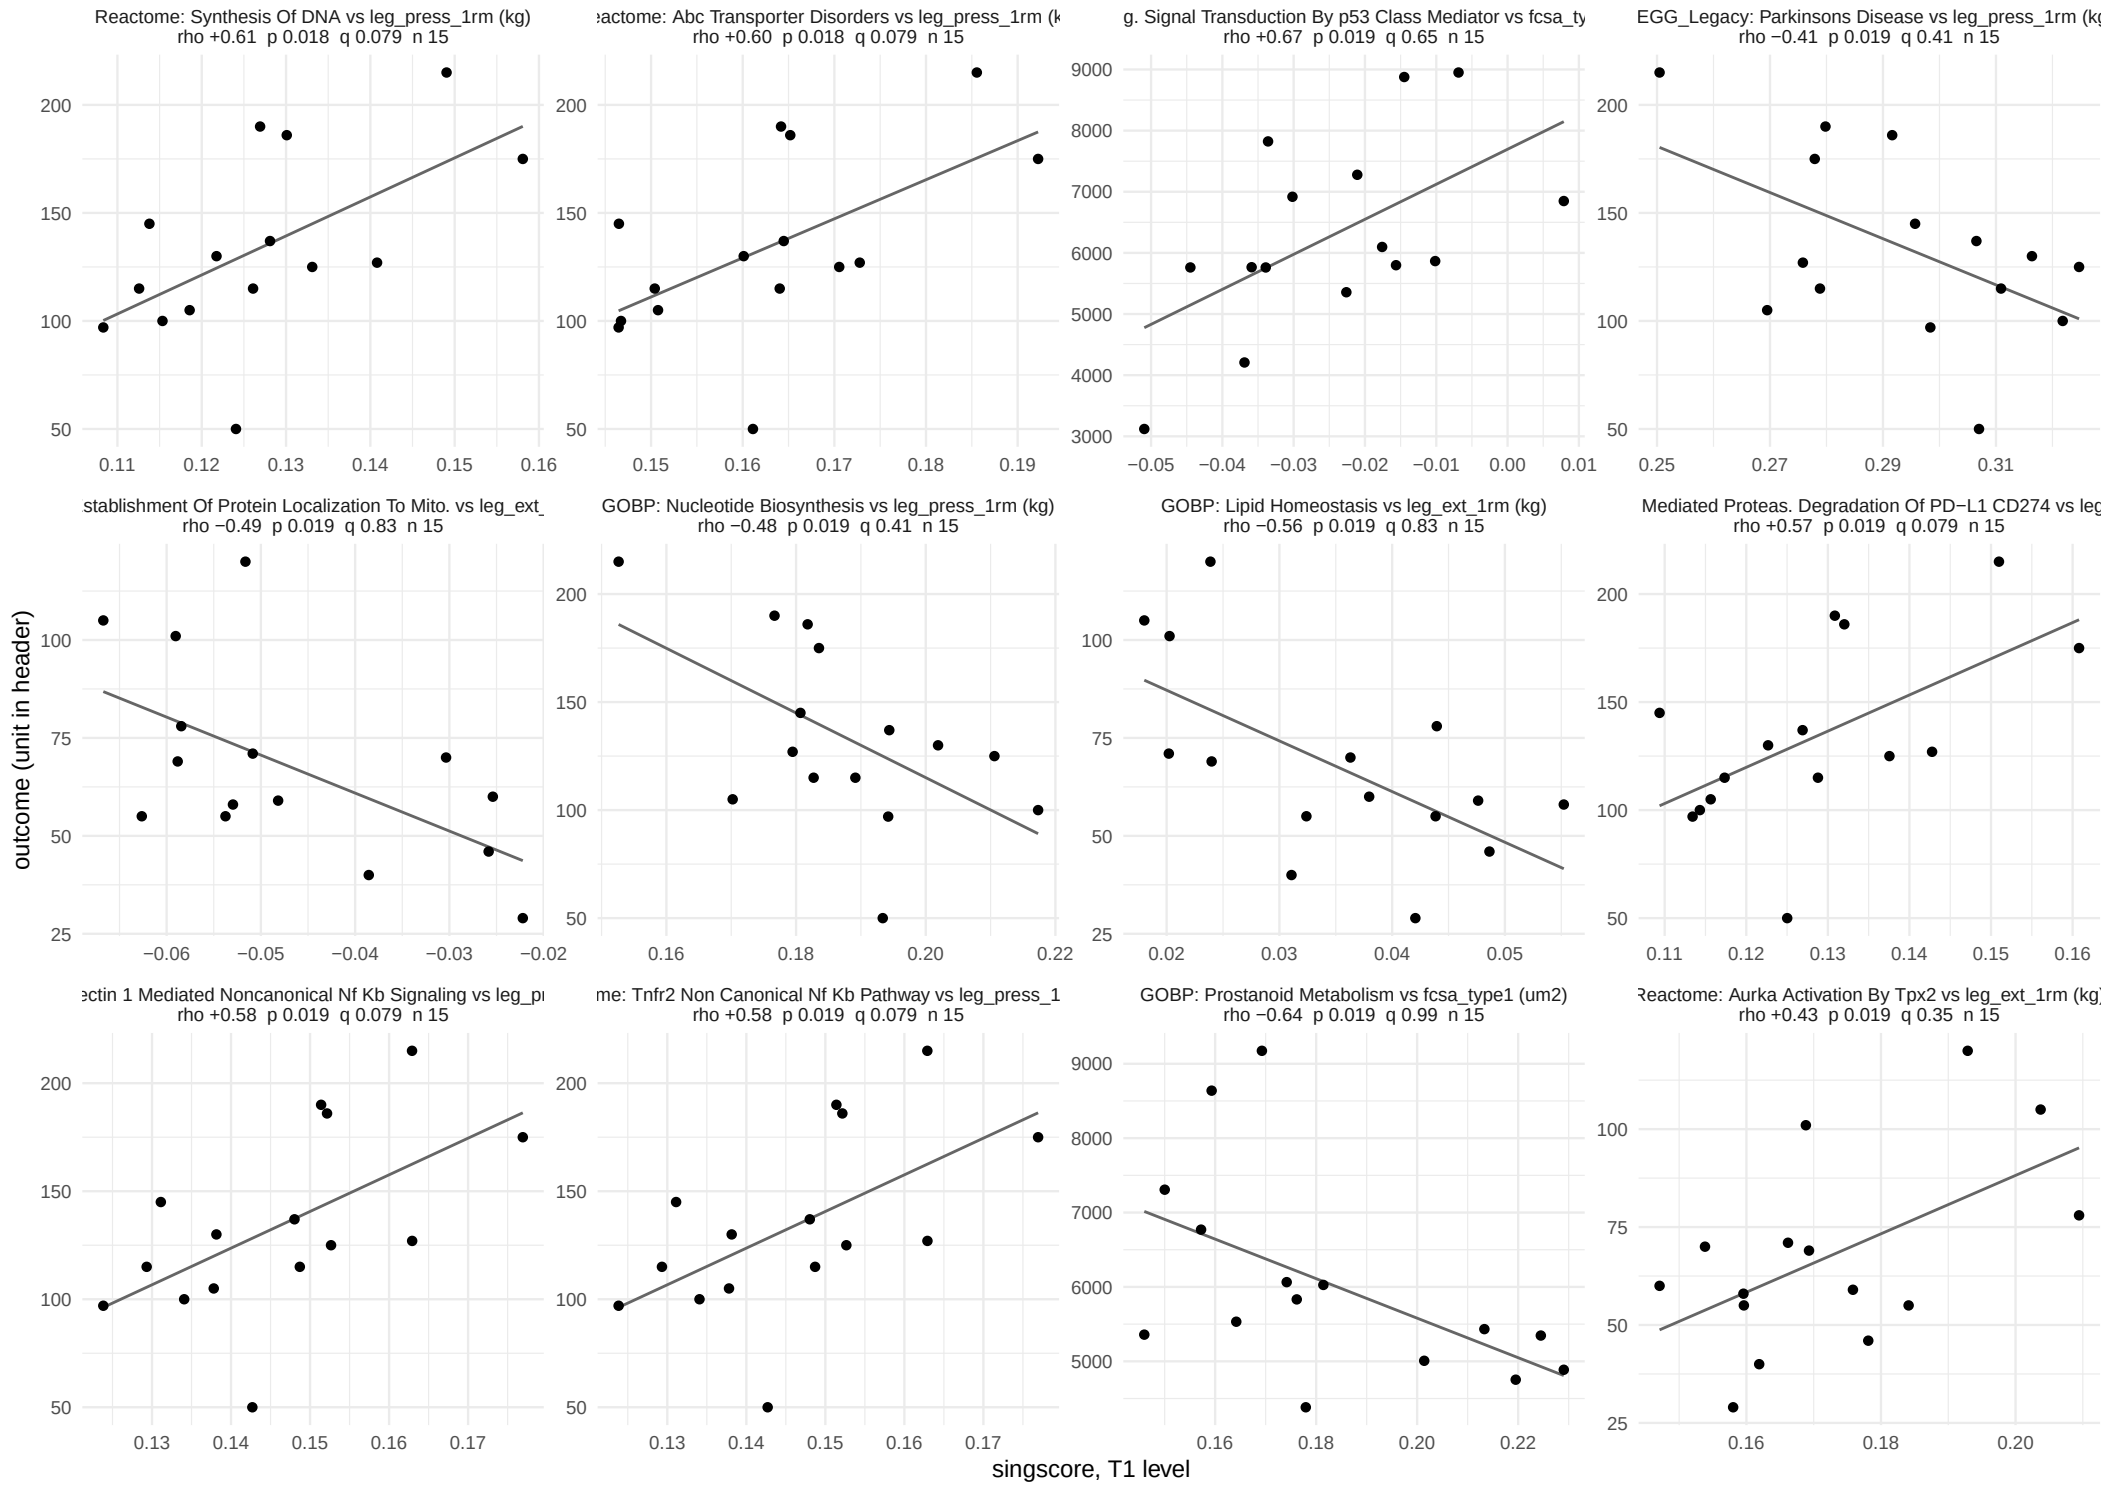

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, baseline_level window


673 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 22 of 57.

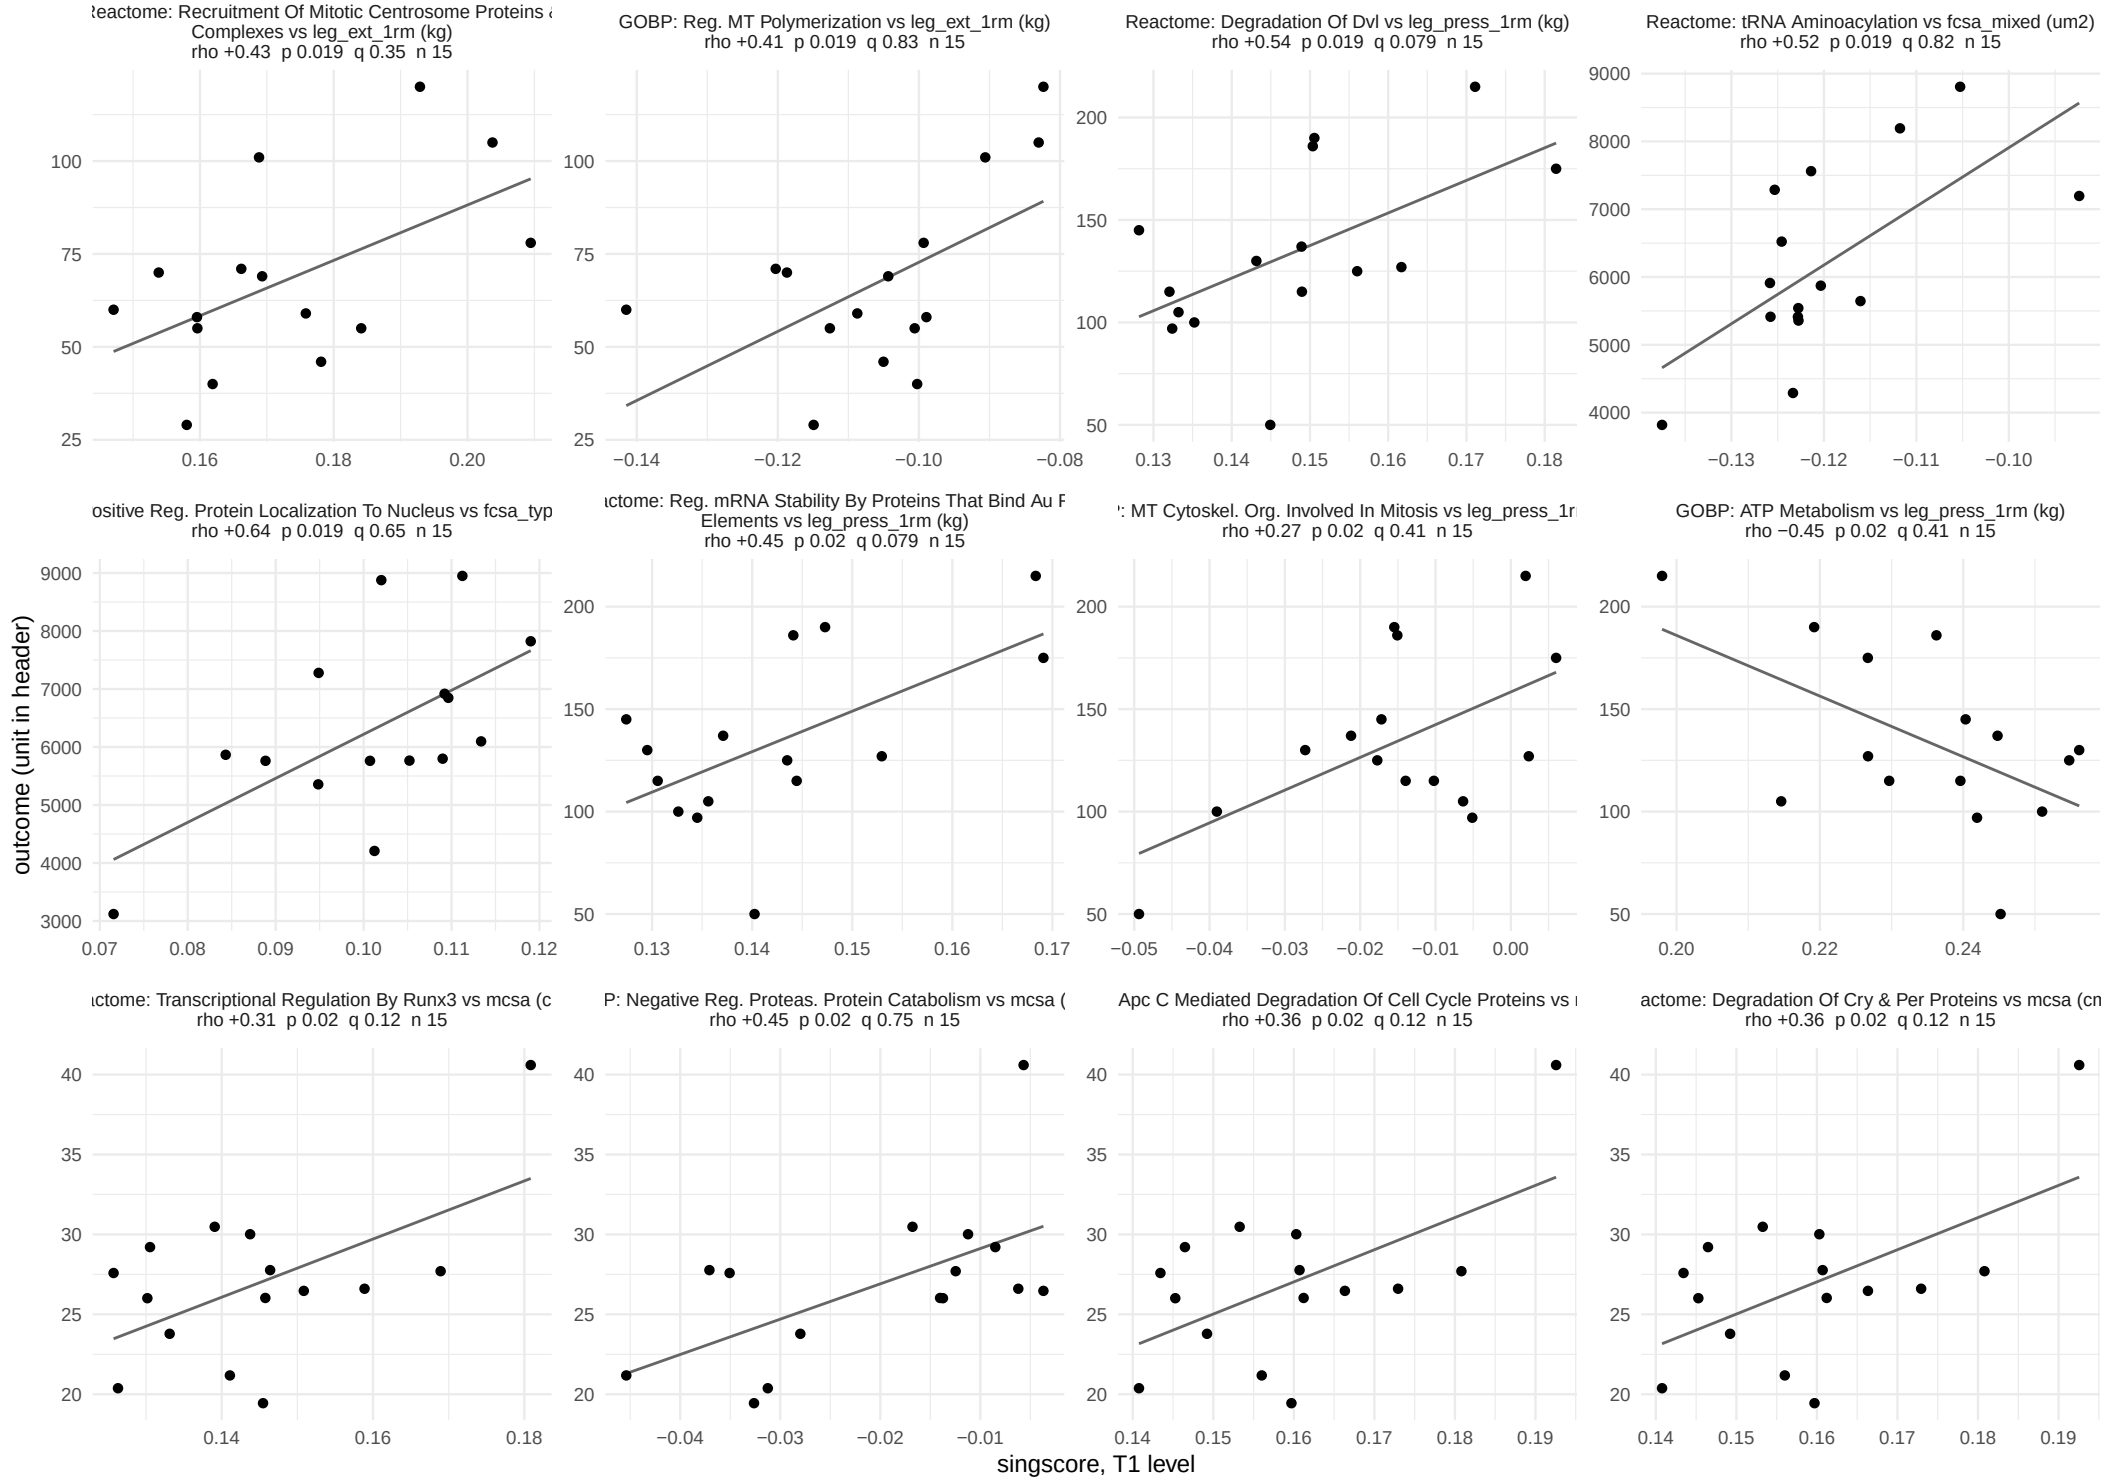

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, baseline_level window


673 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 23 of 57.

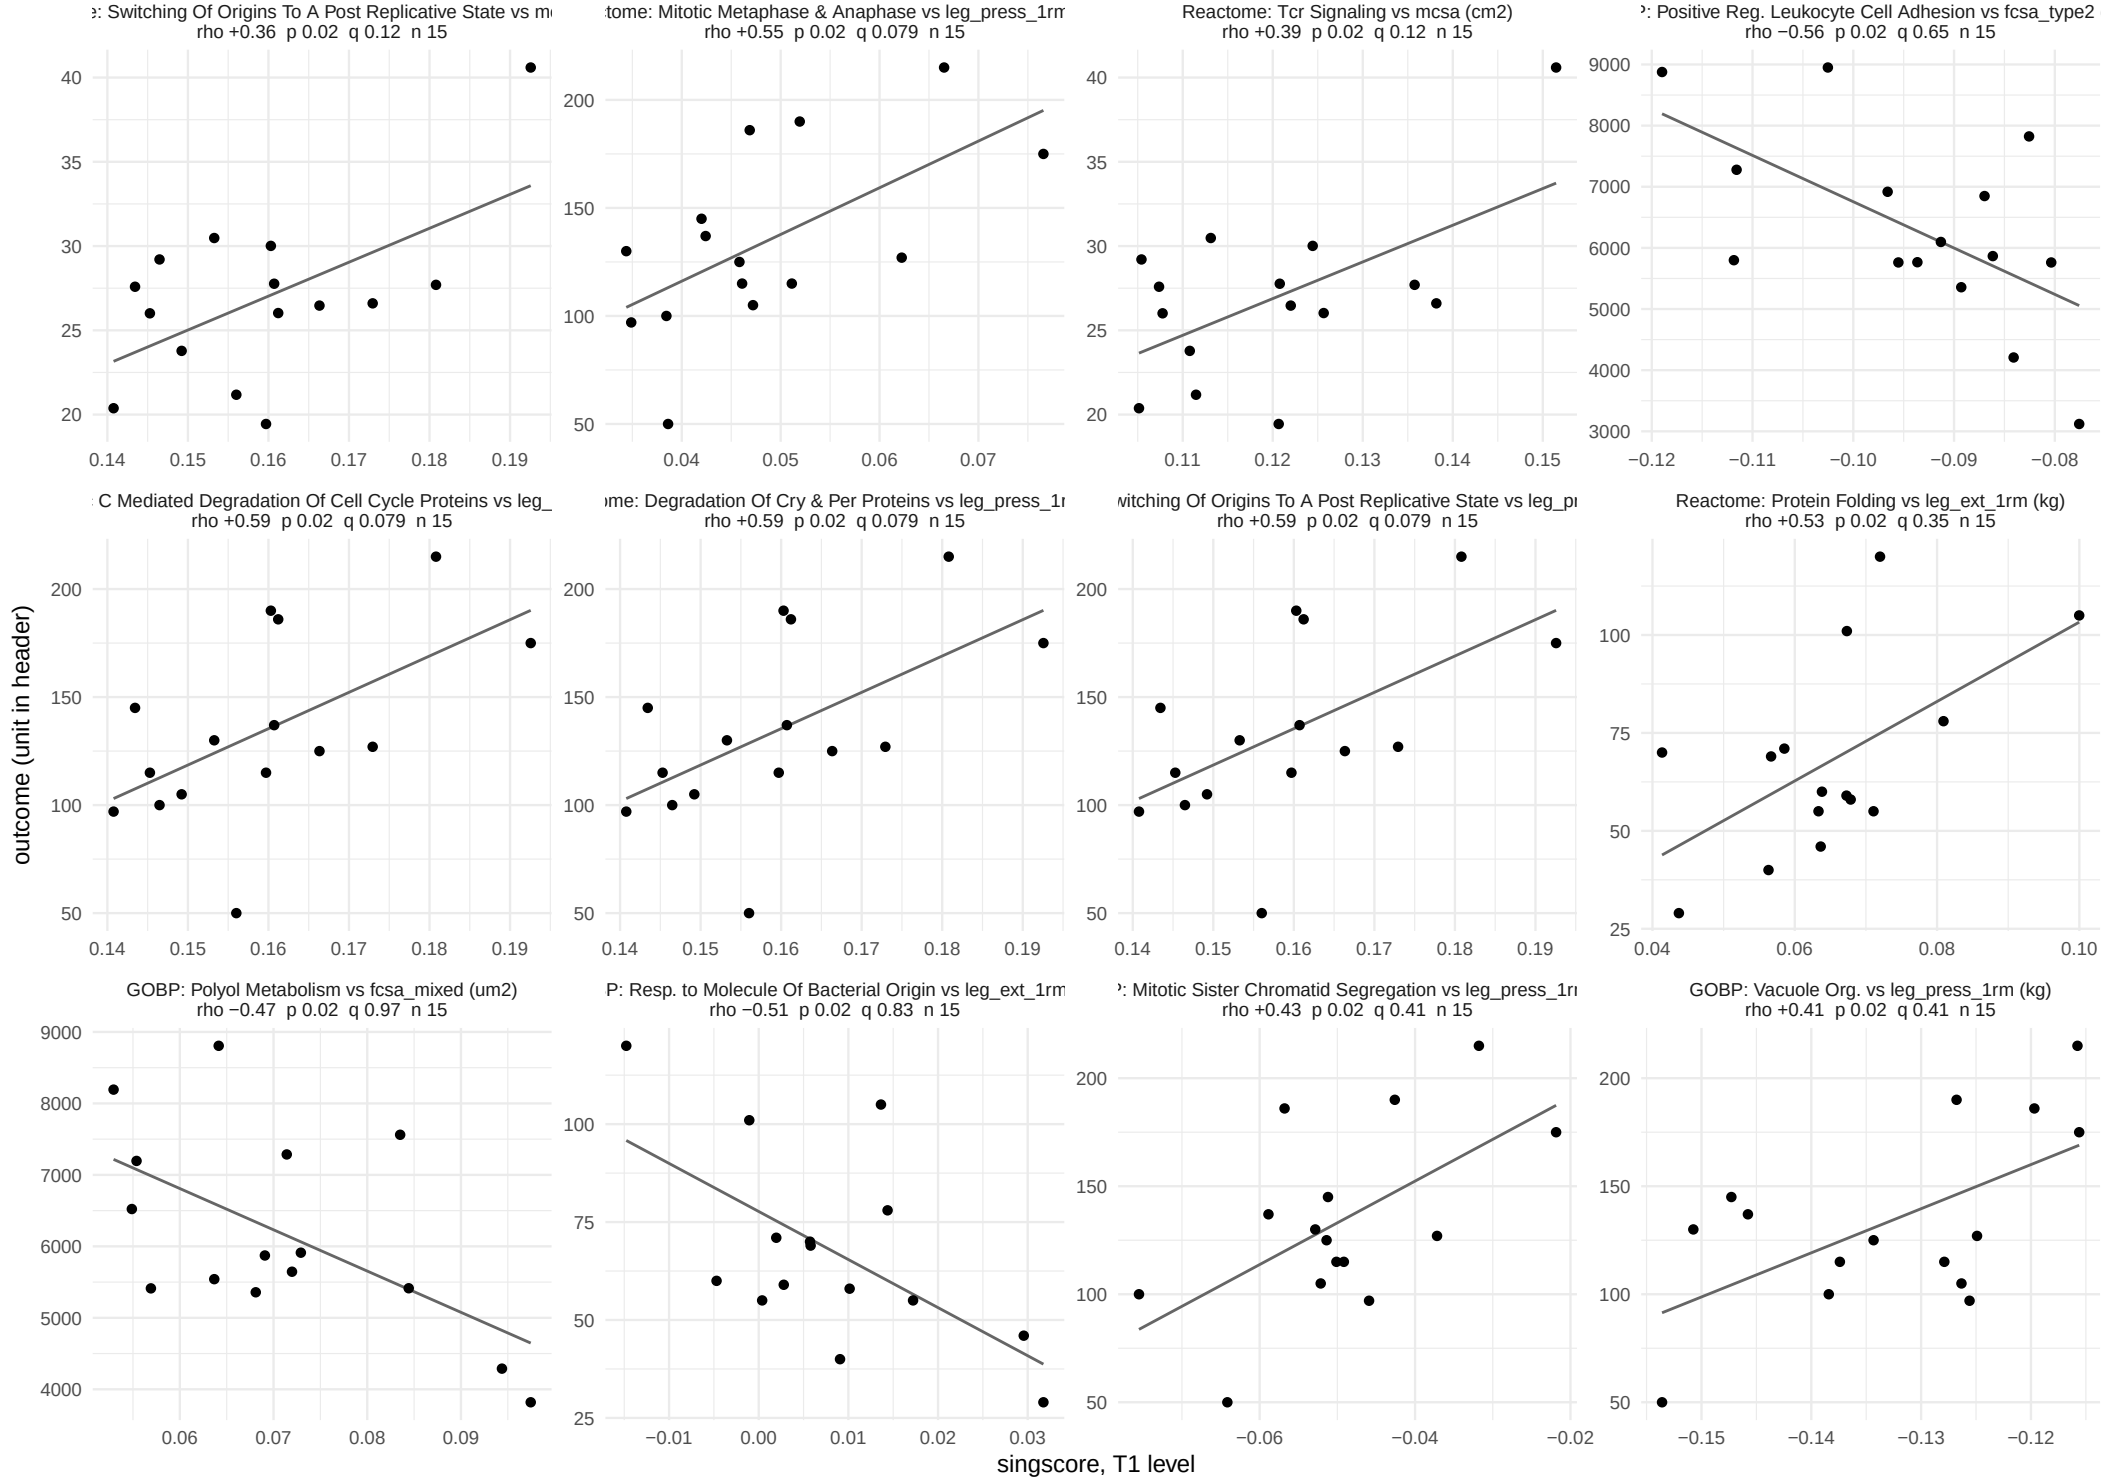

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, baseline_level window


673 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 24 of 57.

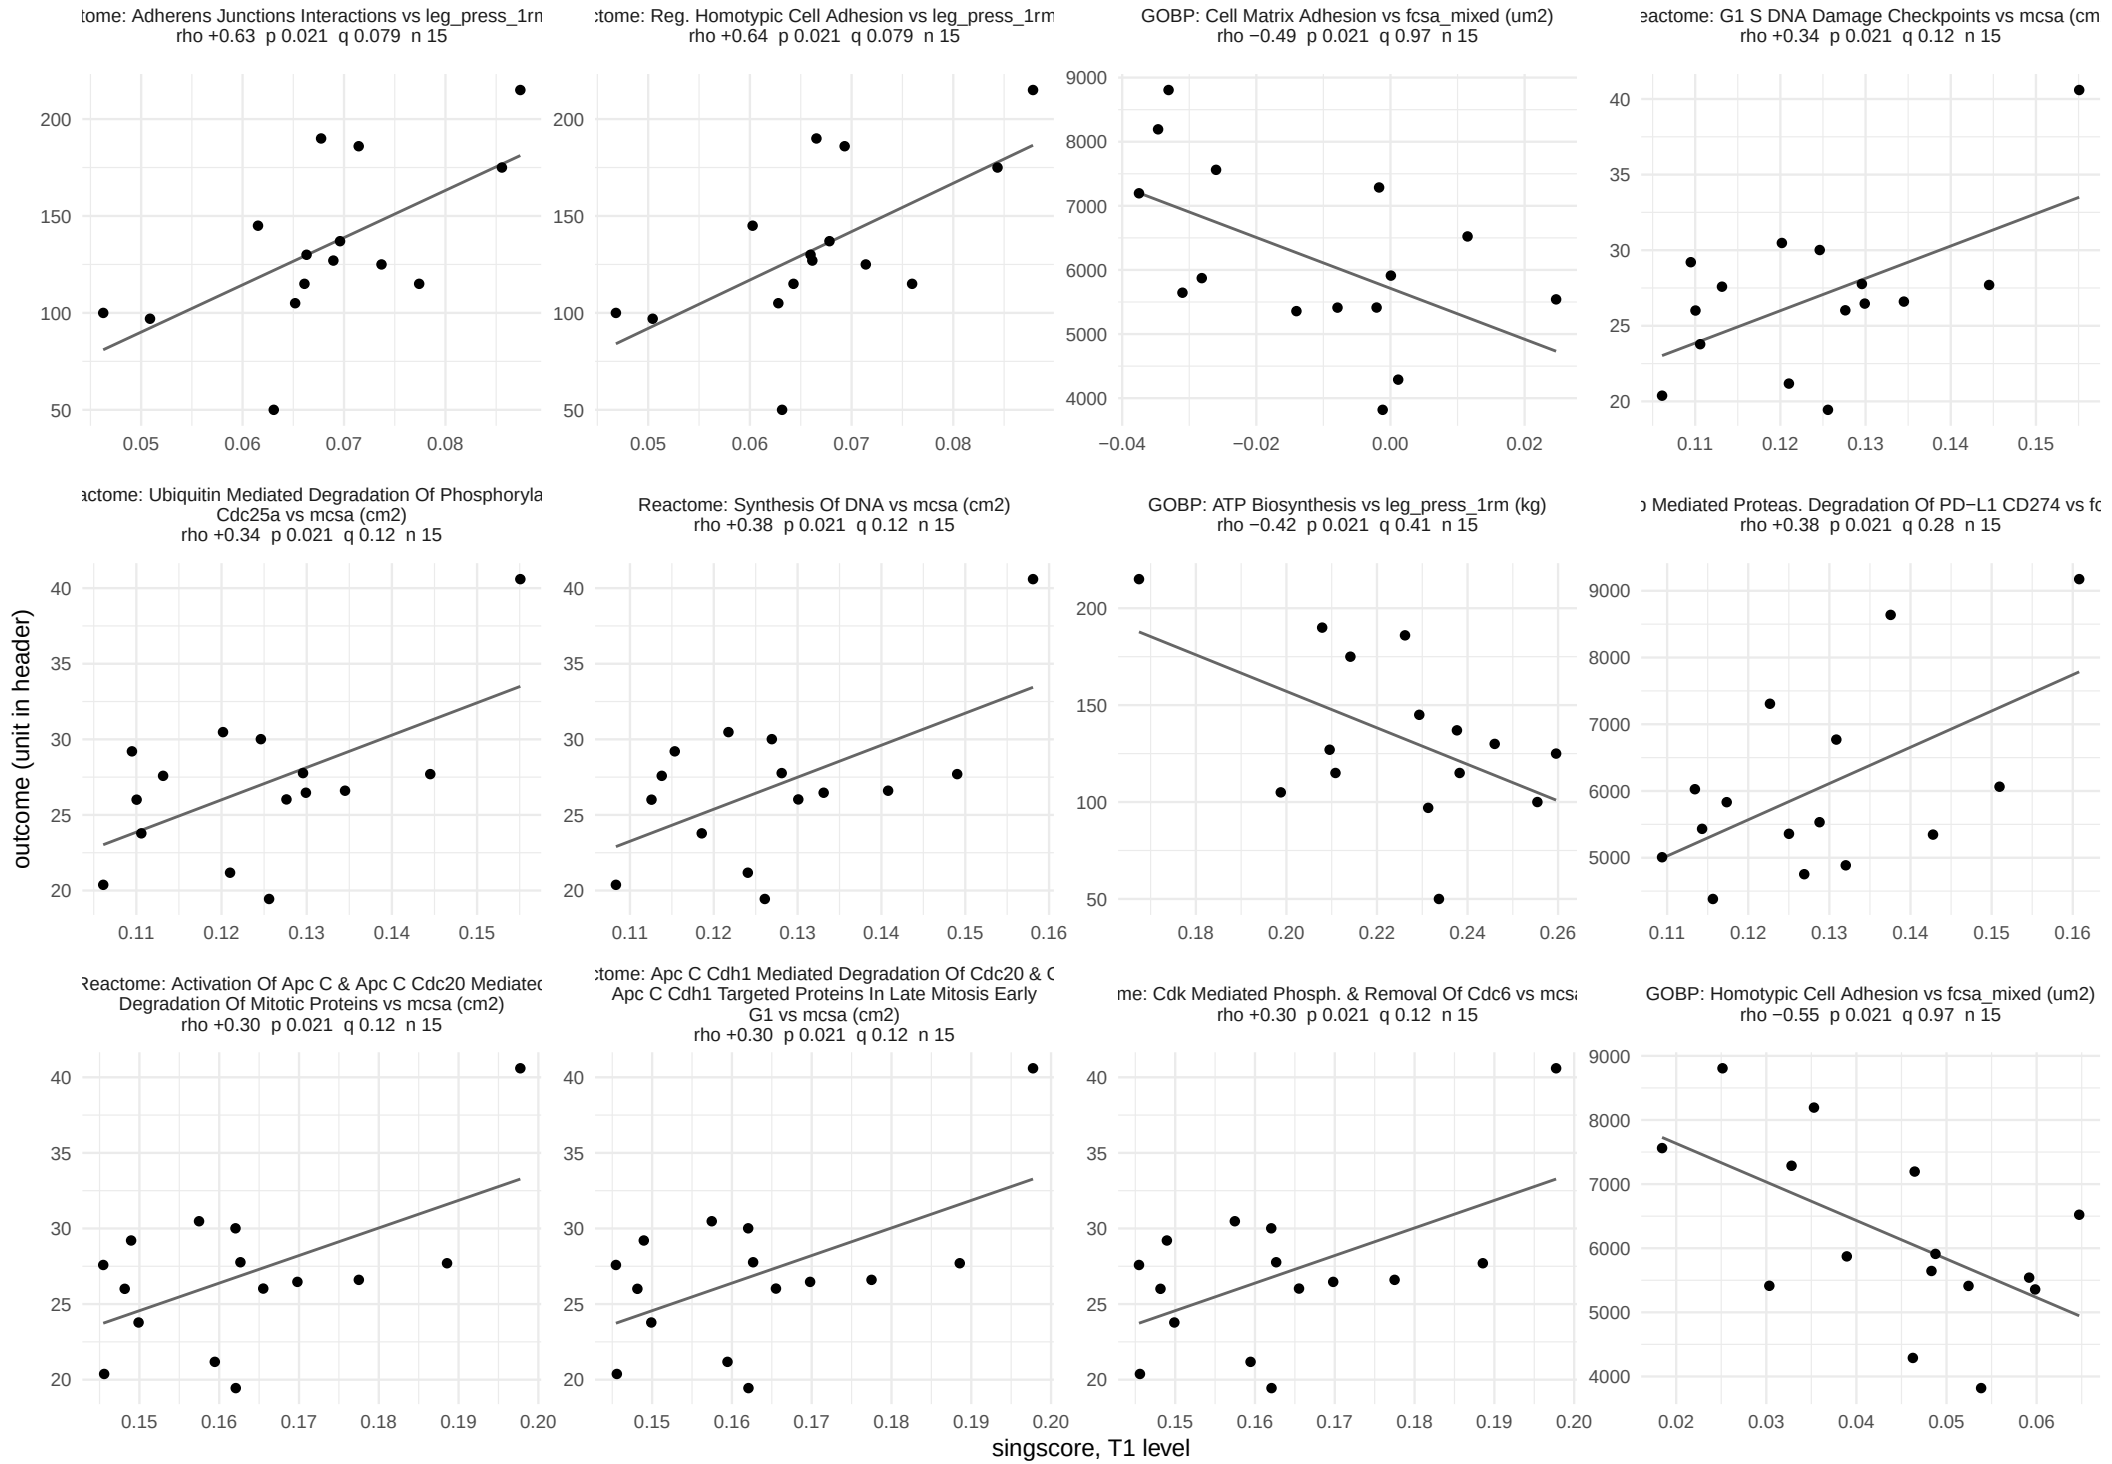

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, baseline_level window


673 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 25 of 57.

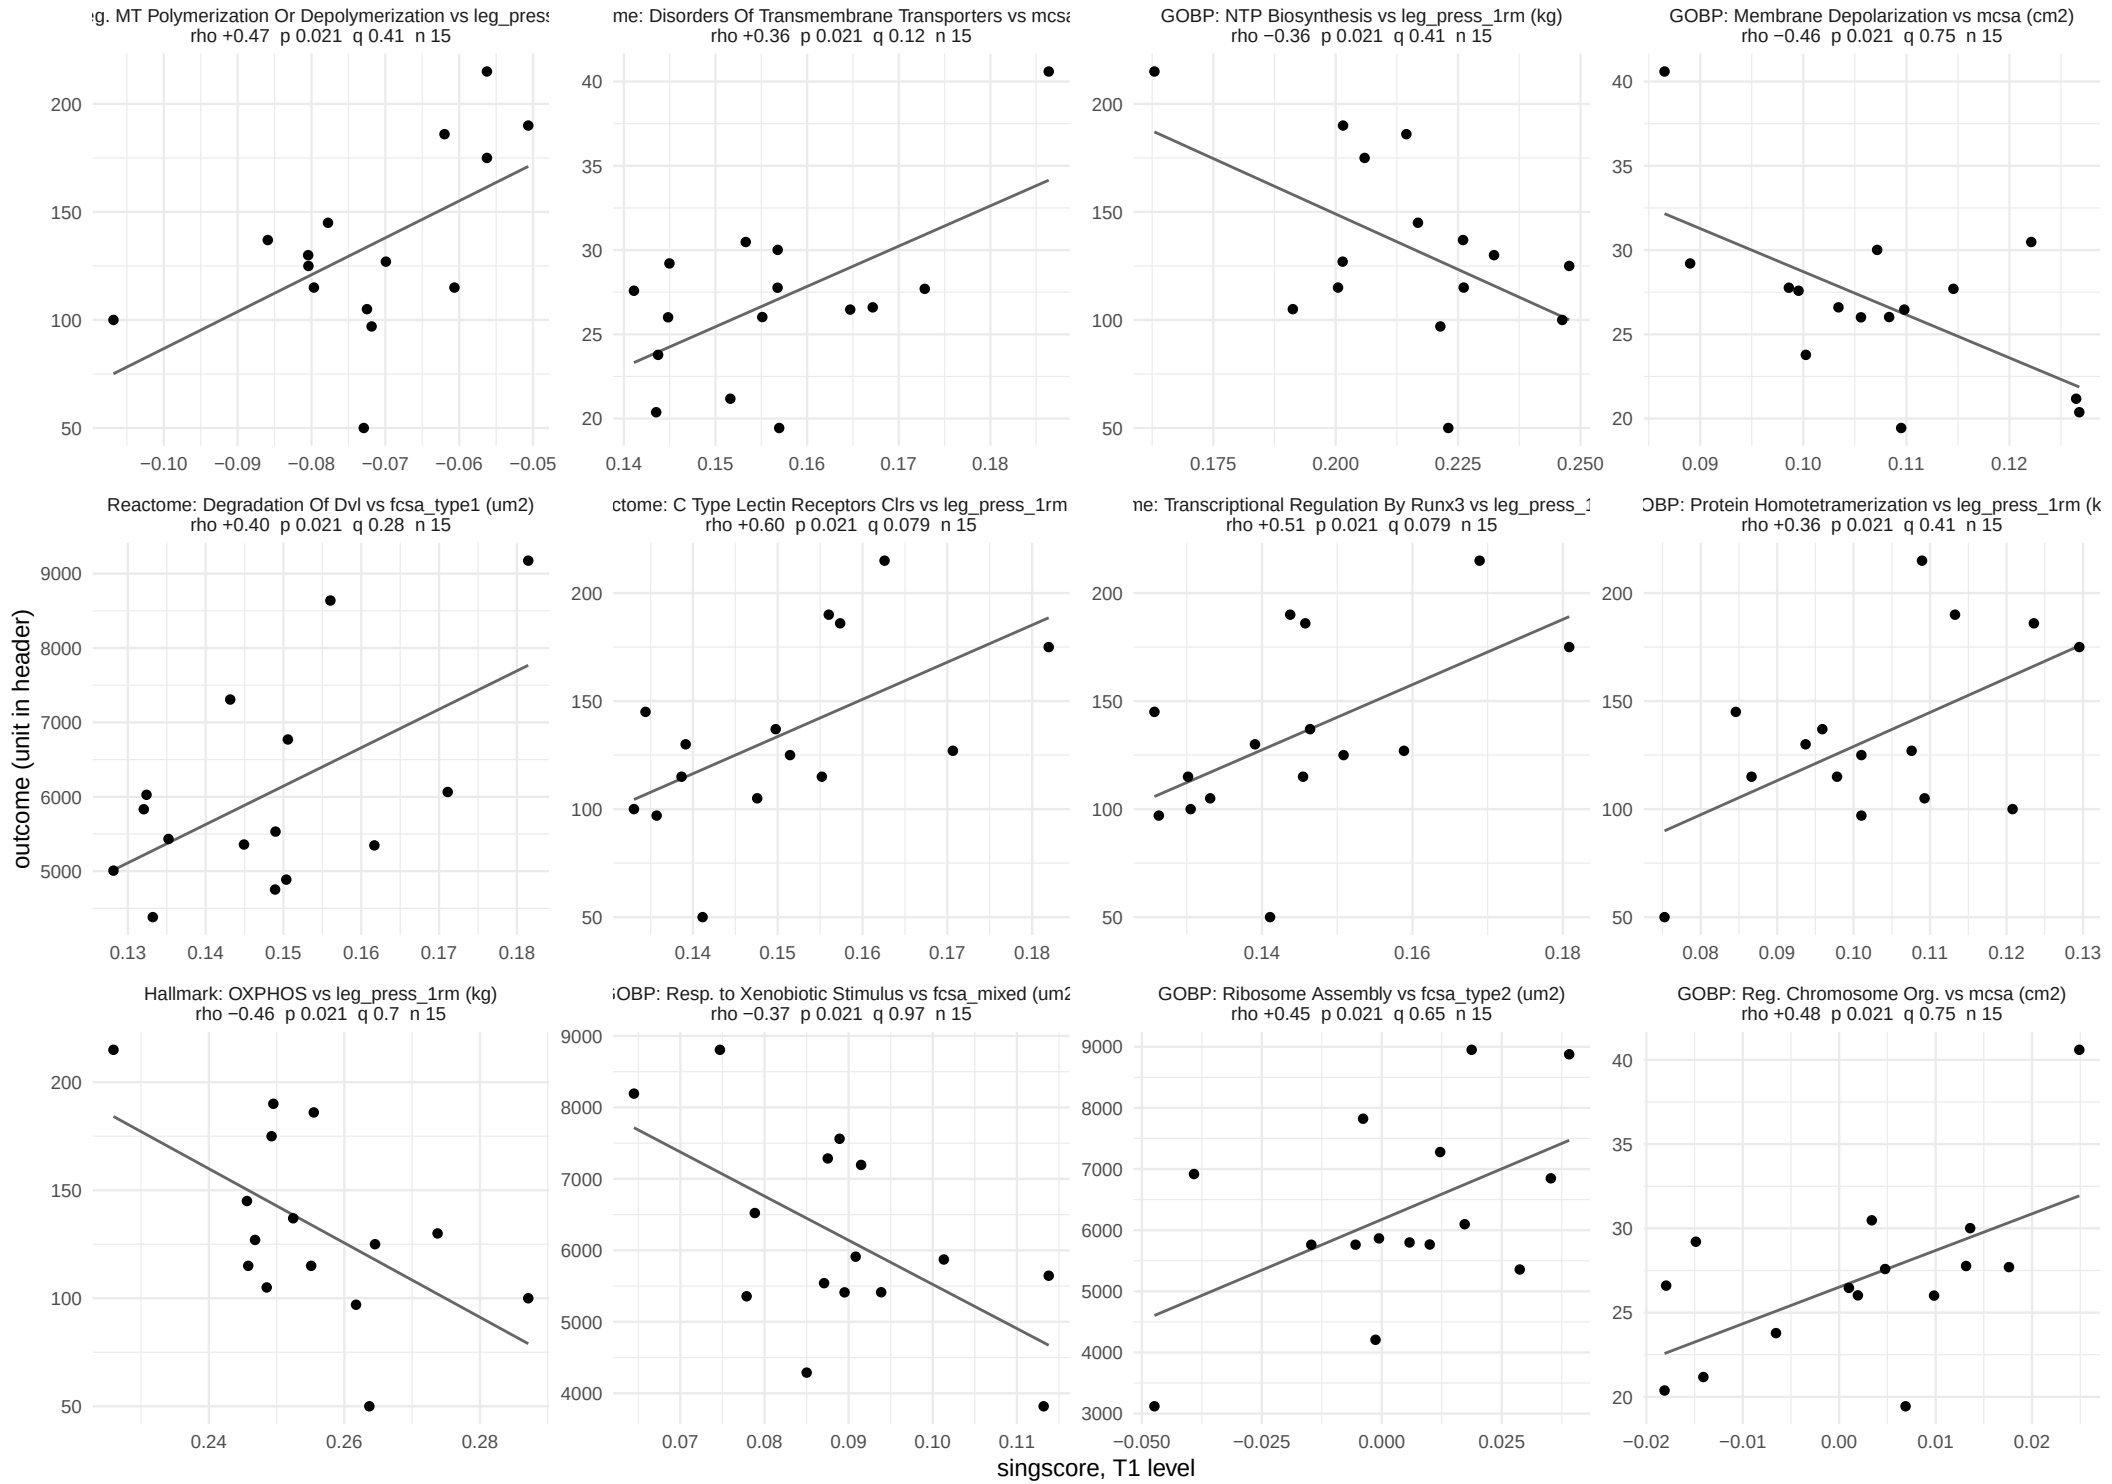

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, baseline_level window


673 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 26 of 57.

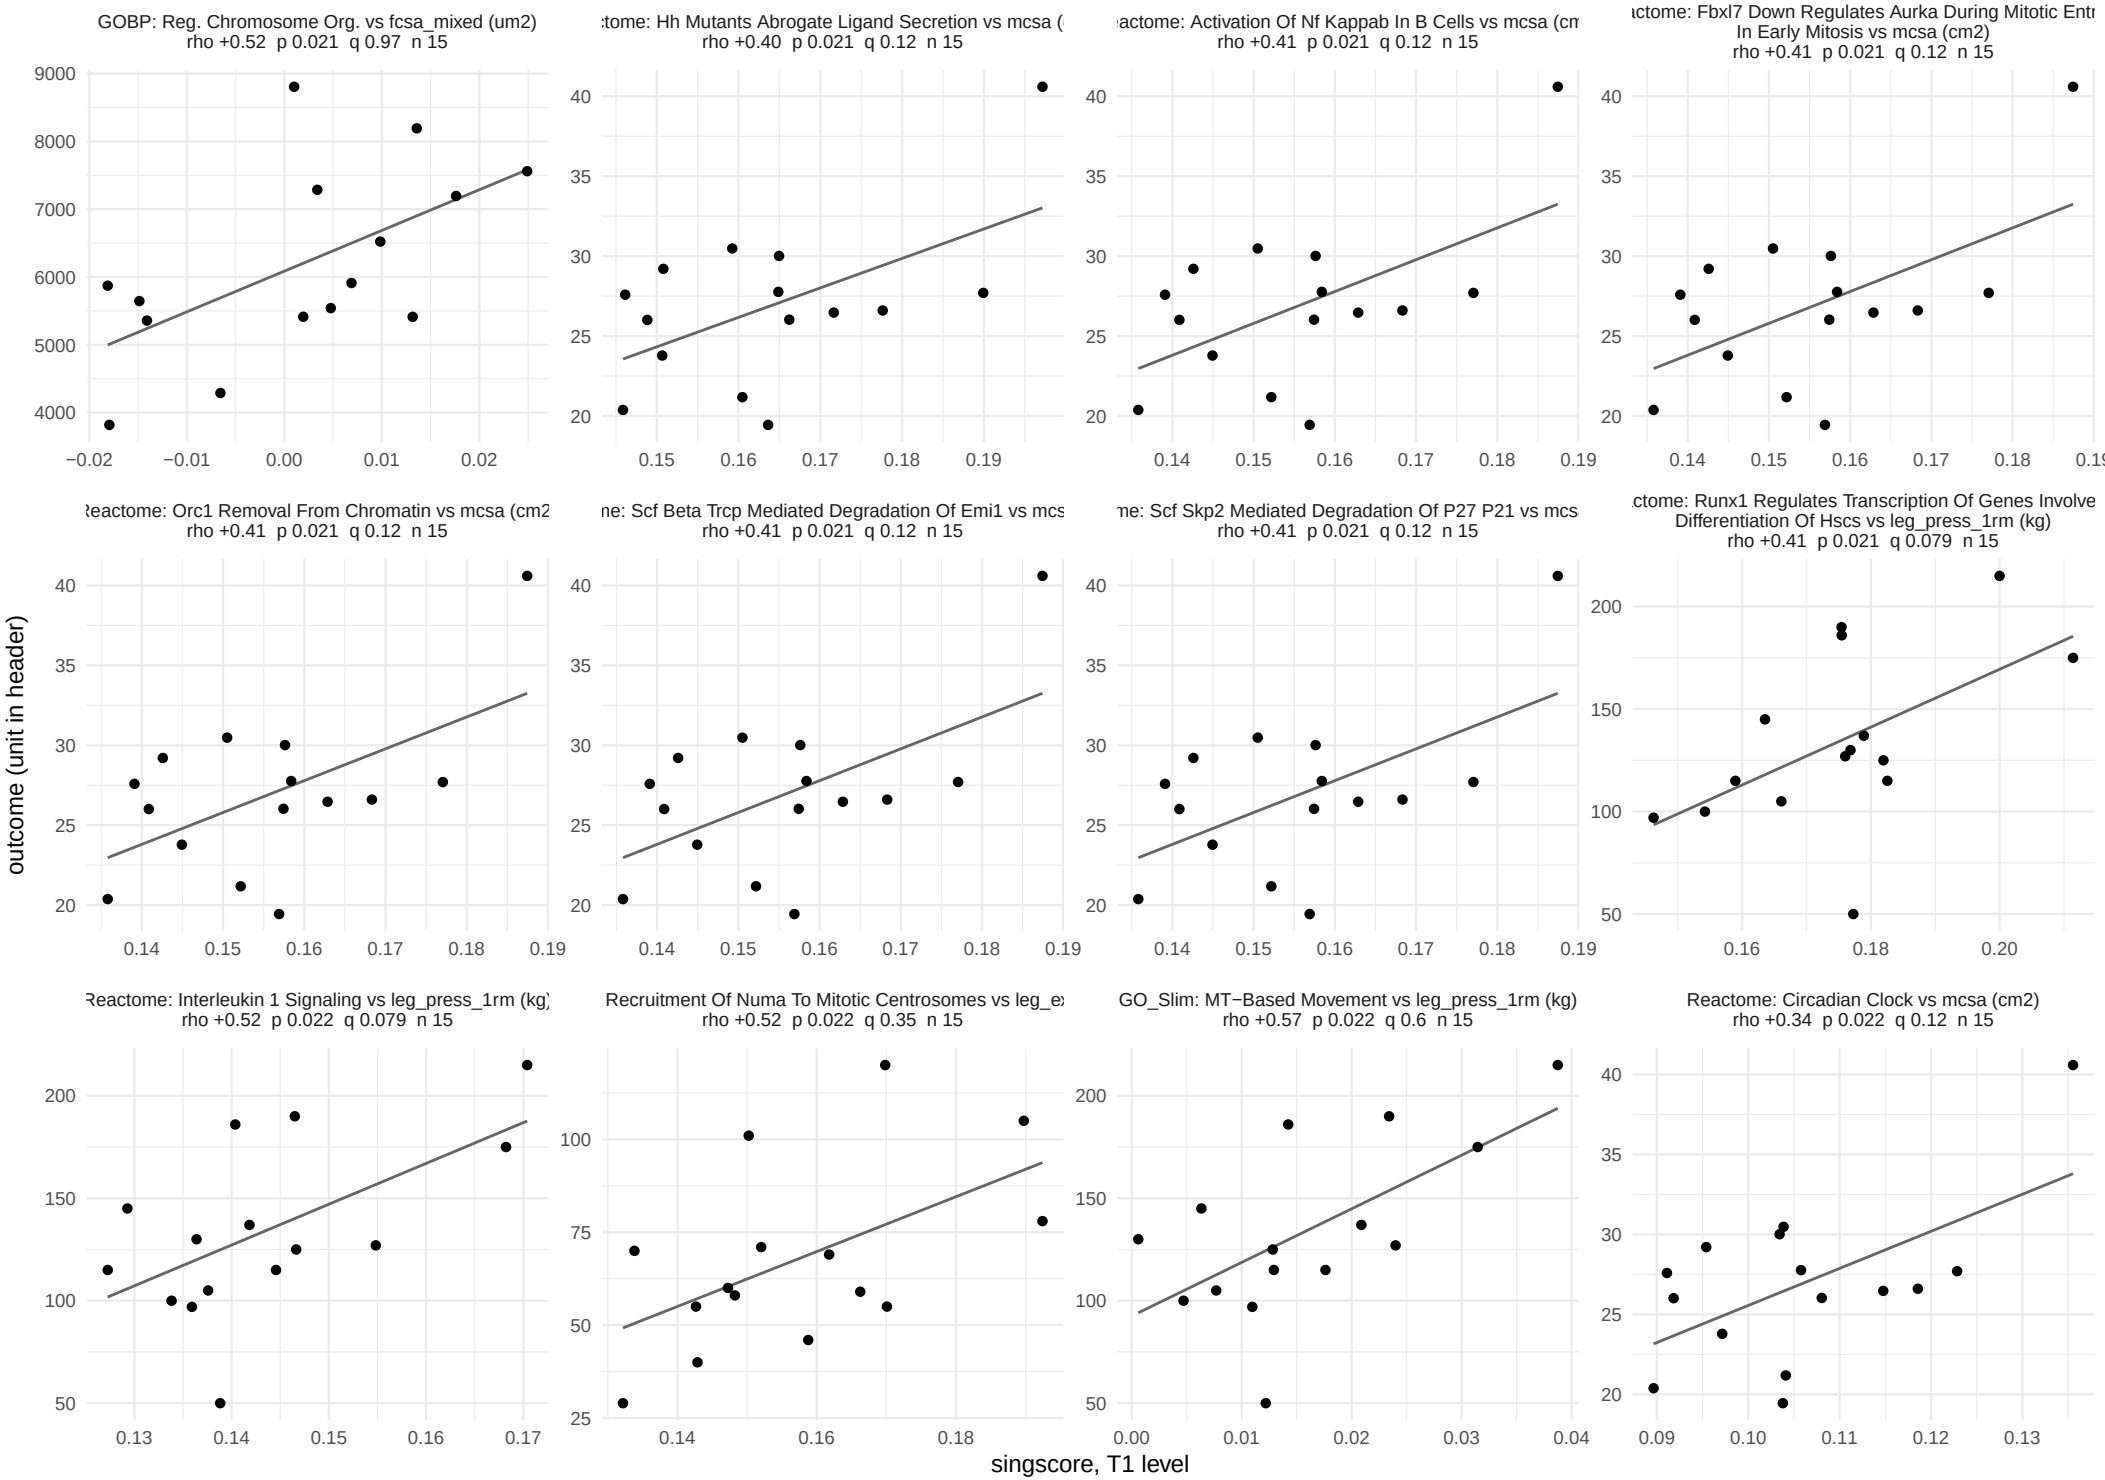

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, baseline_level window


673 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 27 of 57.

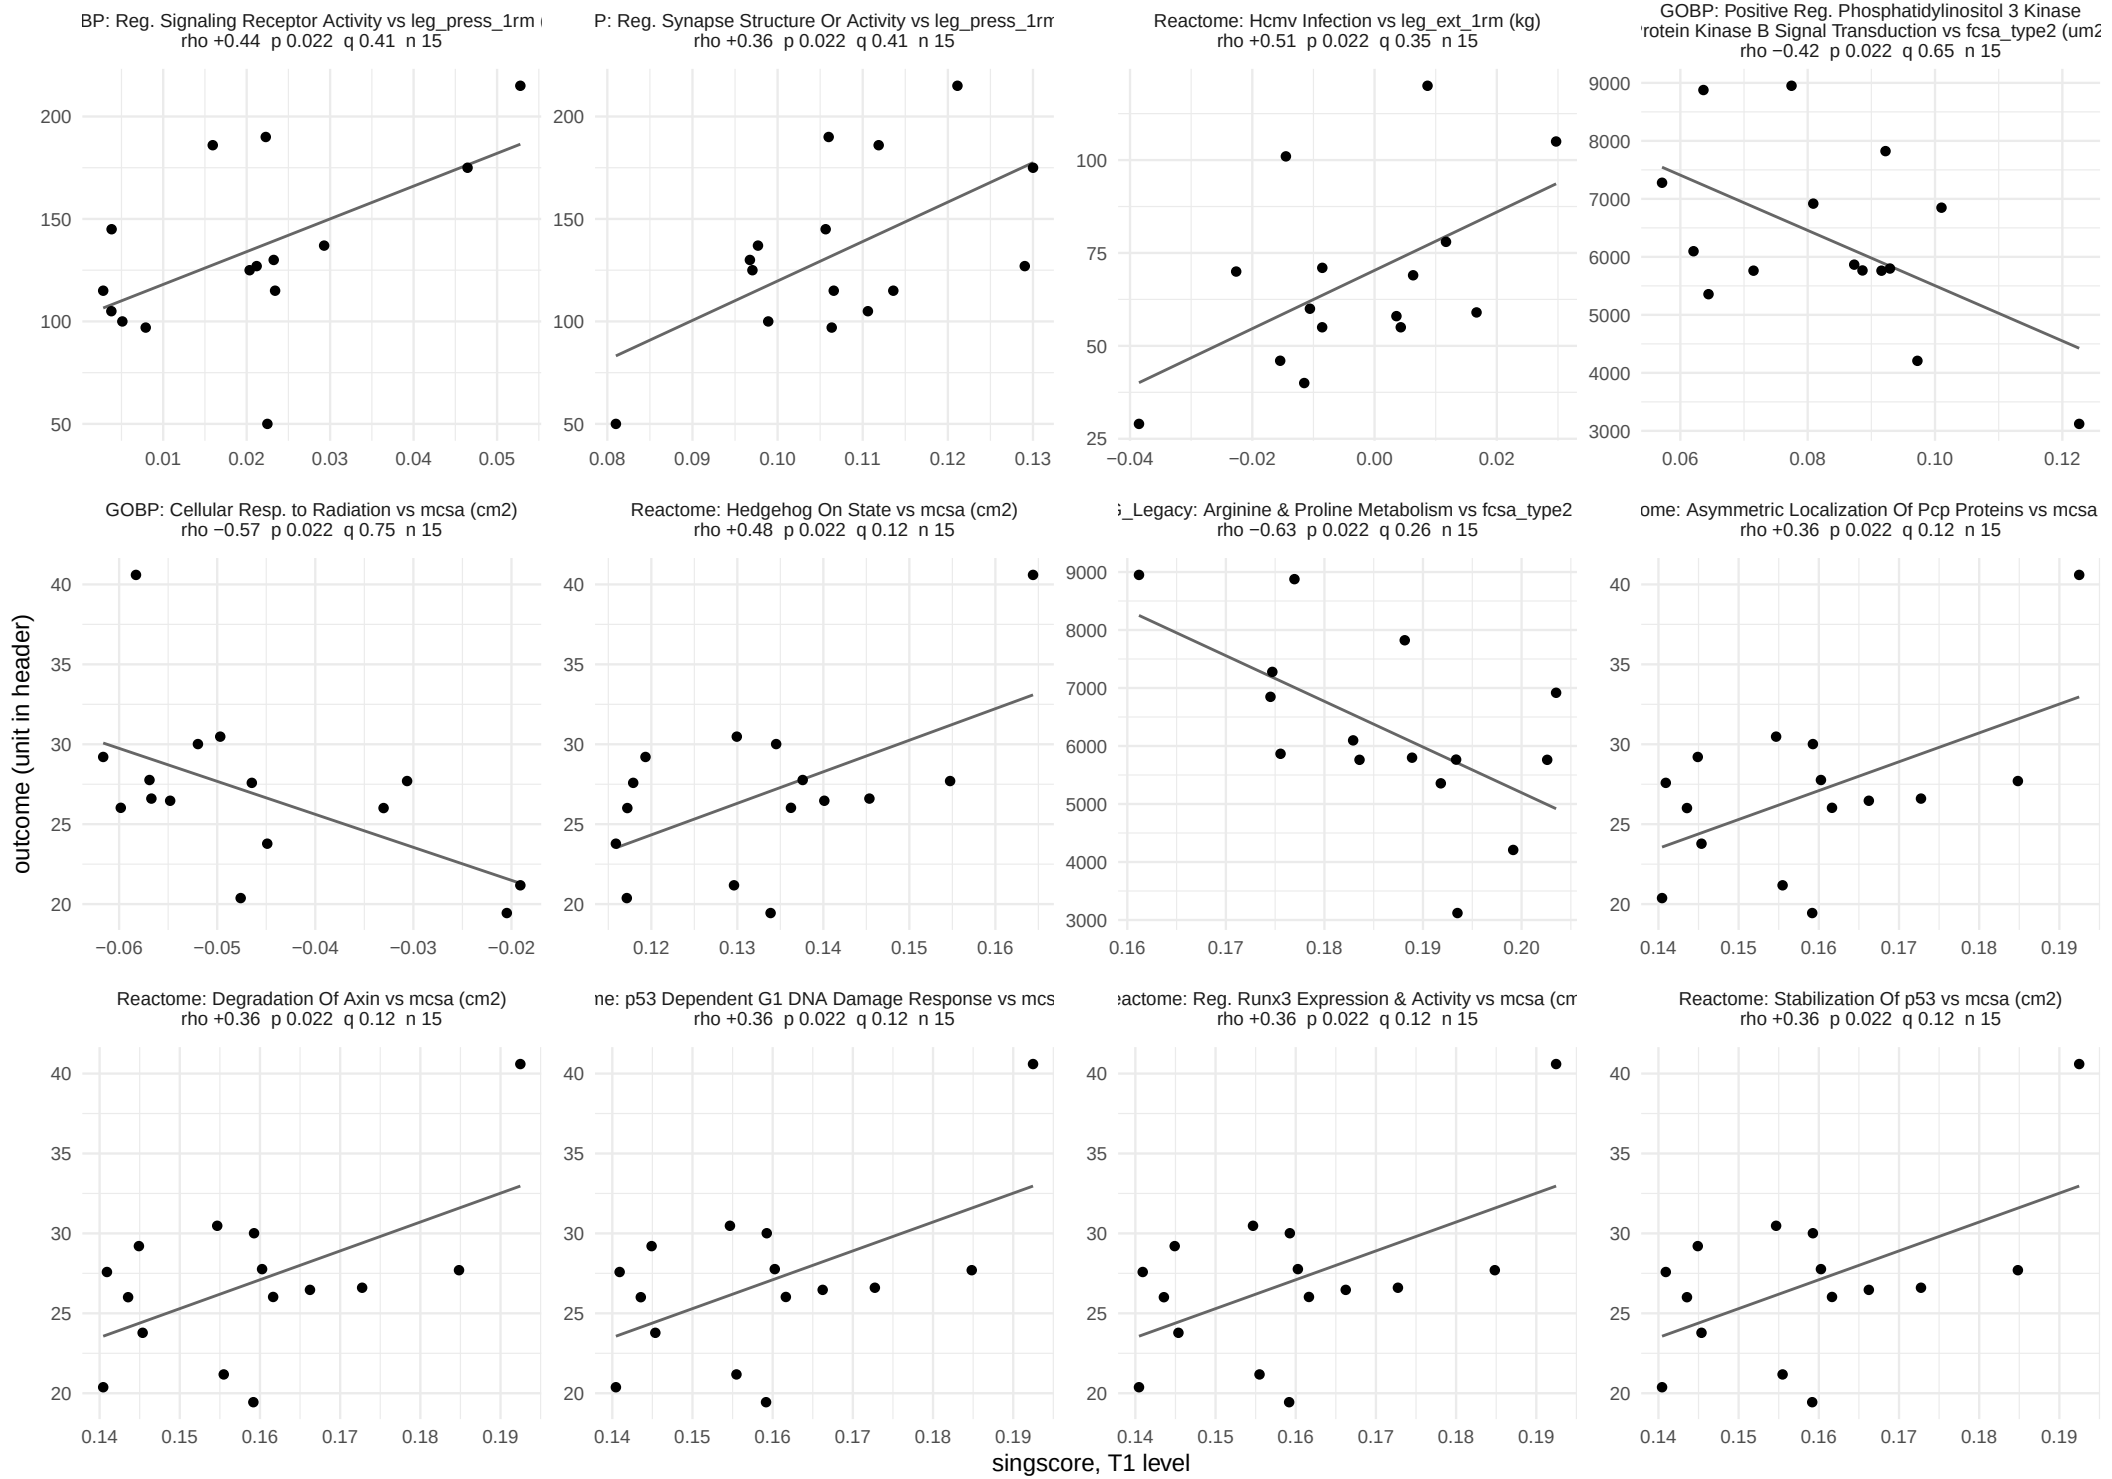

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, baseline_level window


673 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 28 of 57.

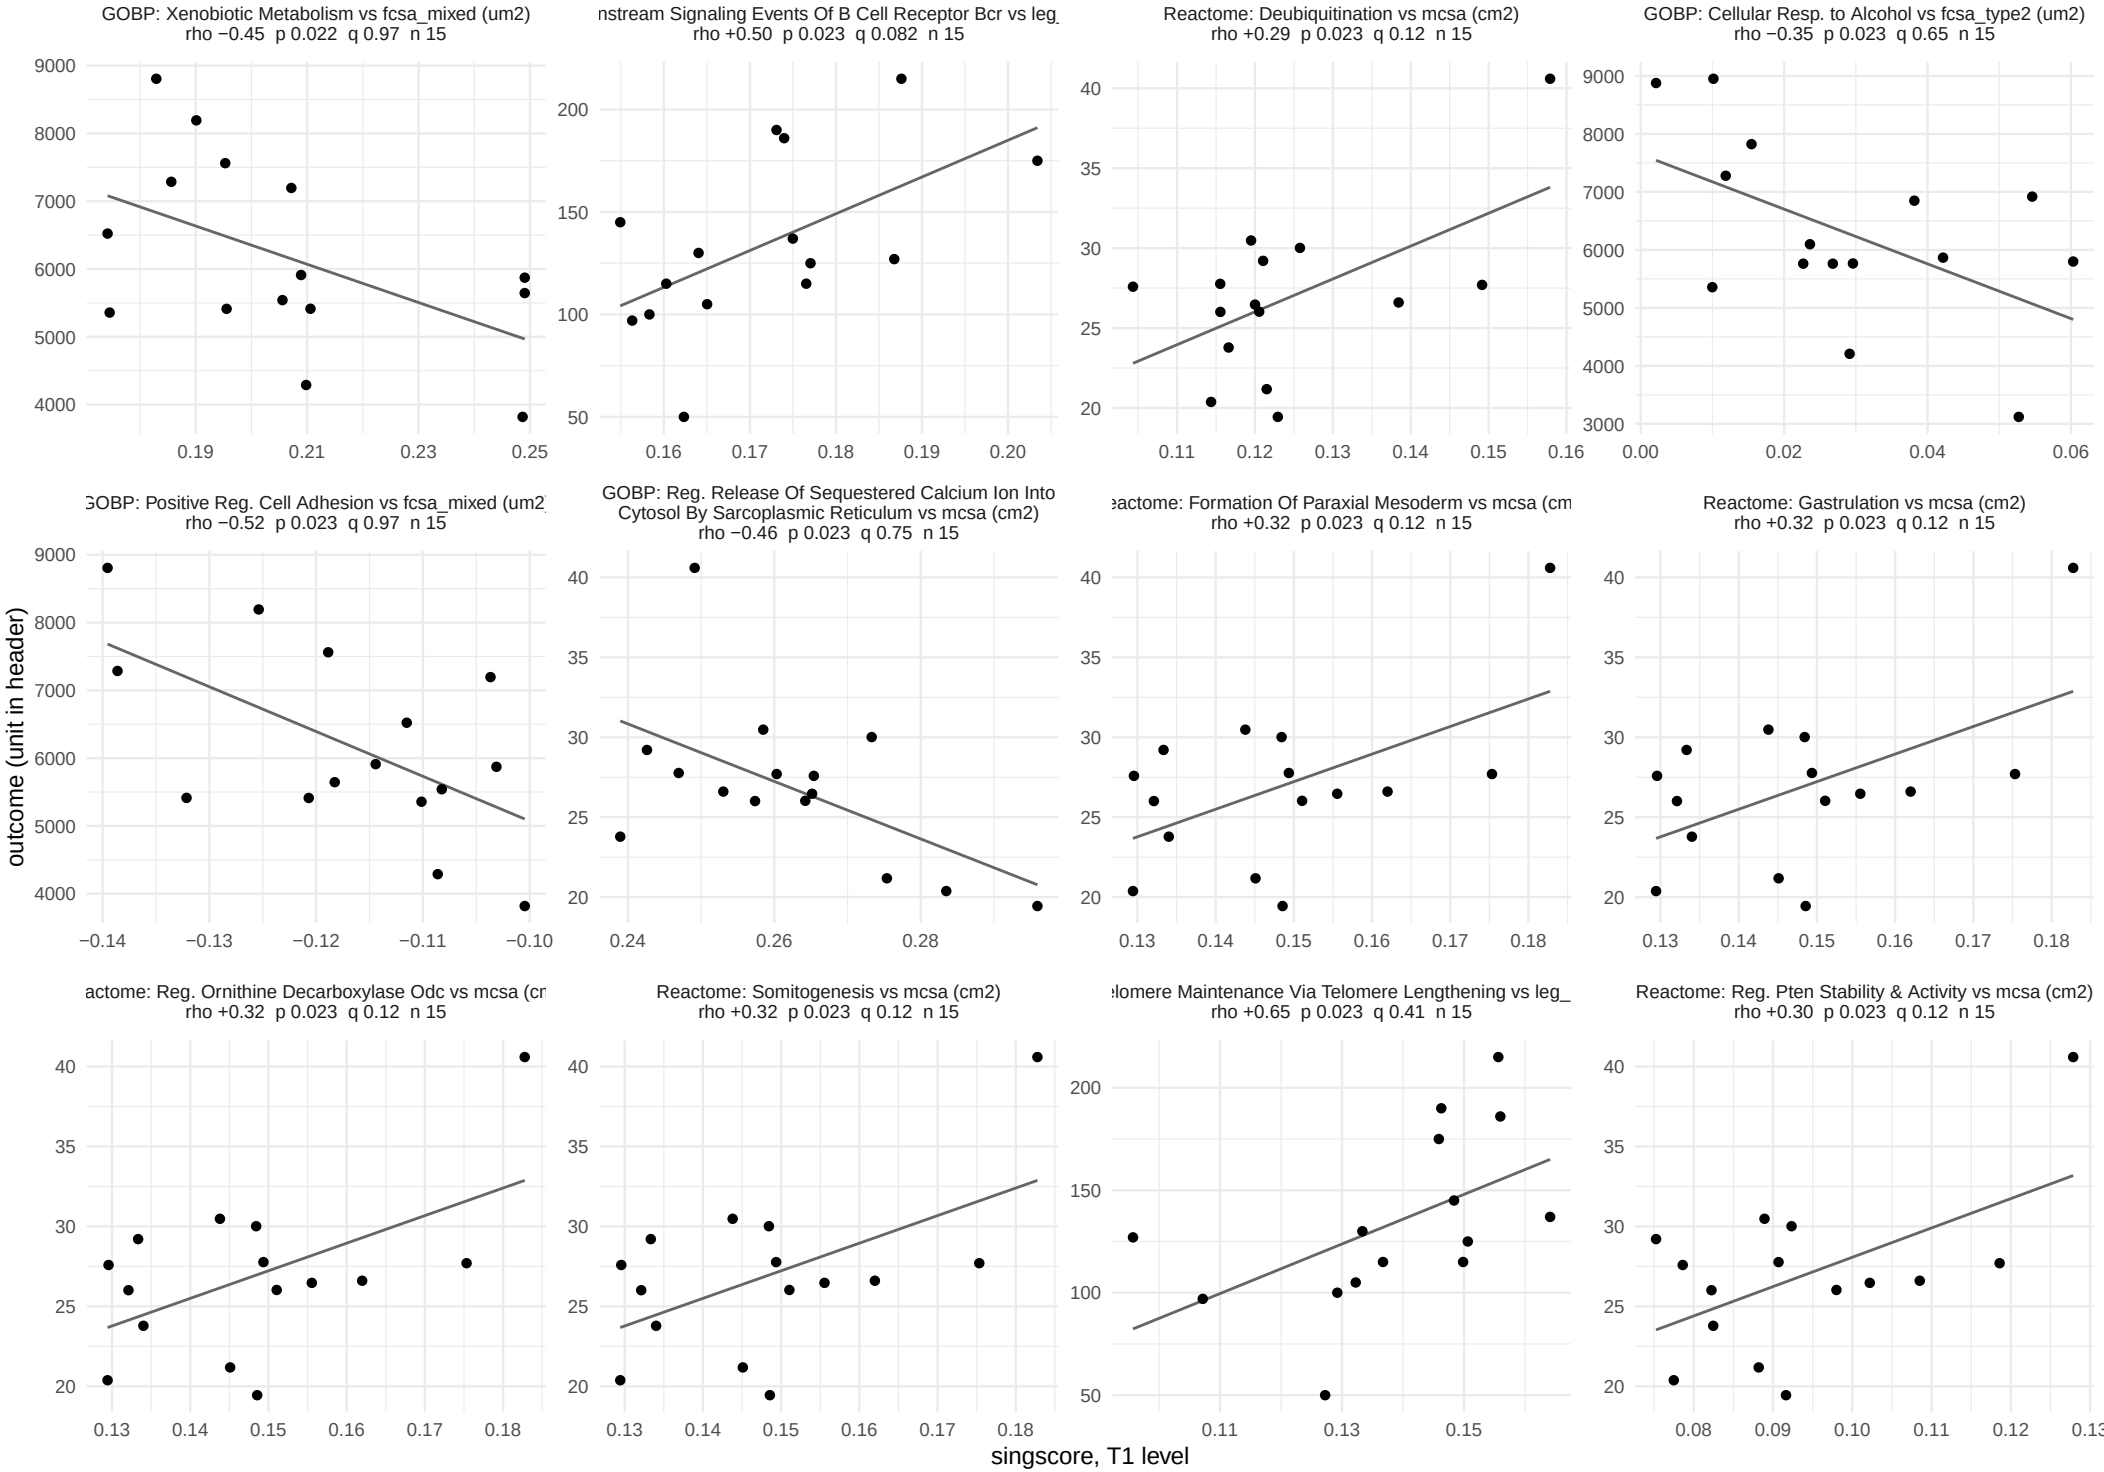

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, baseline_level window


673 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 29 of 57.

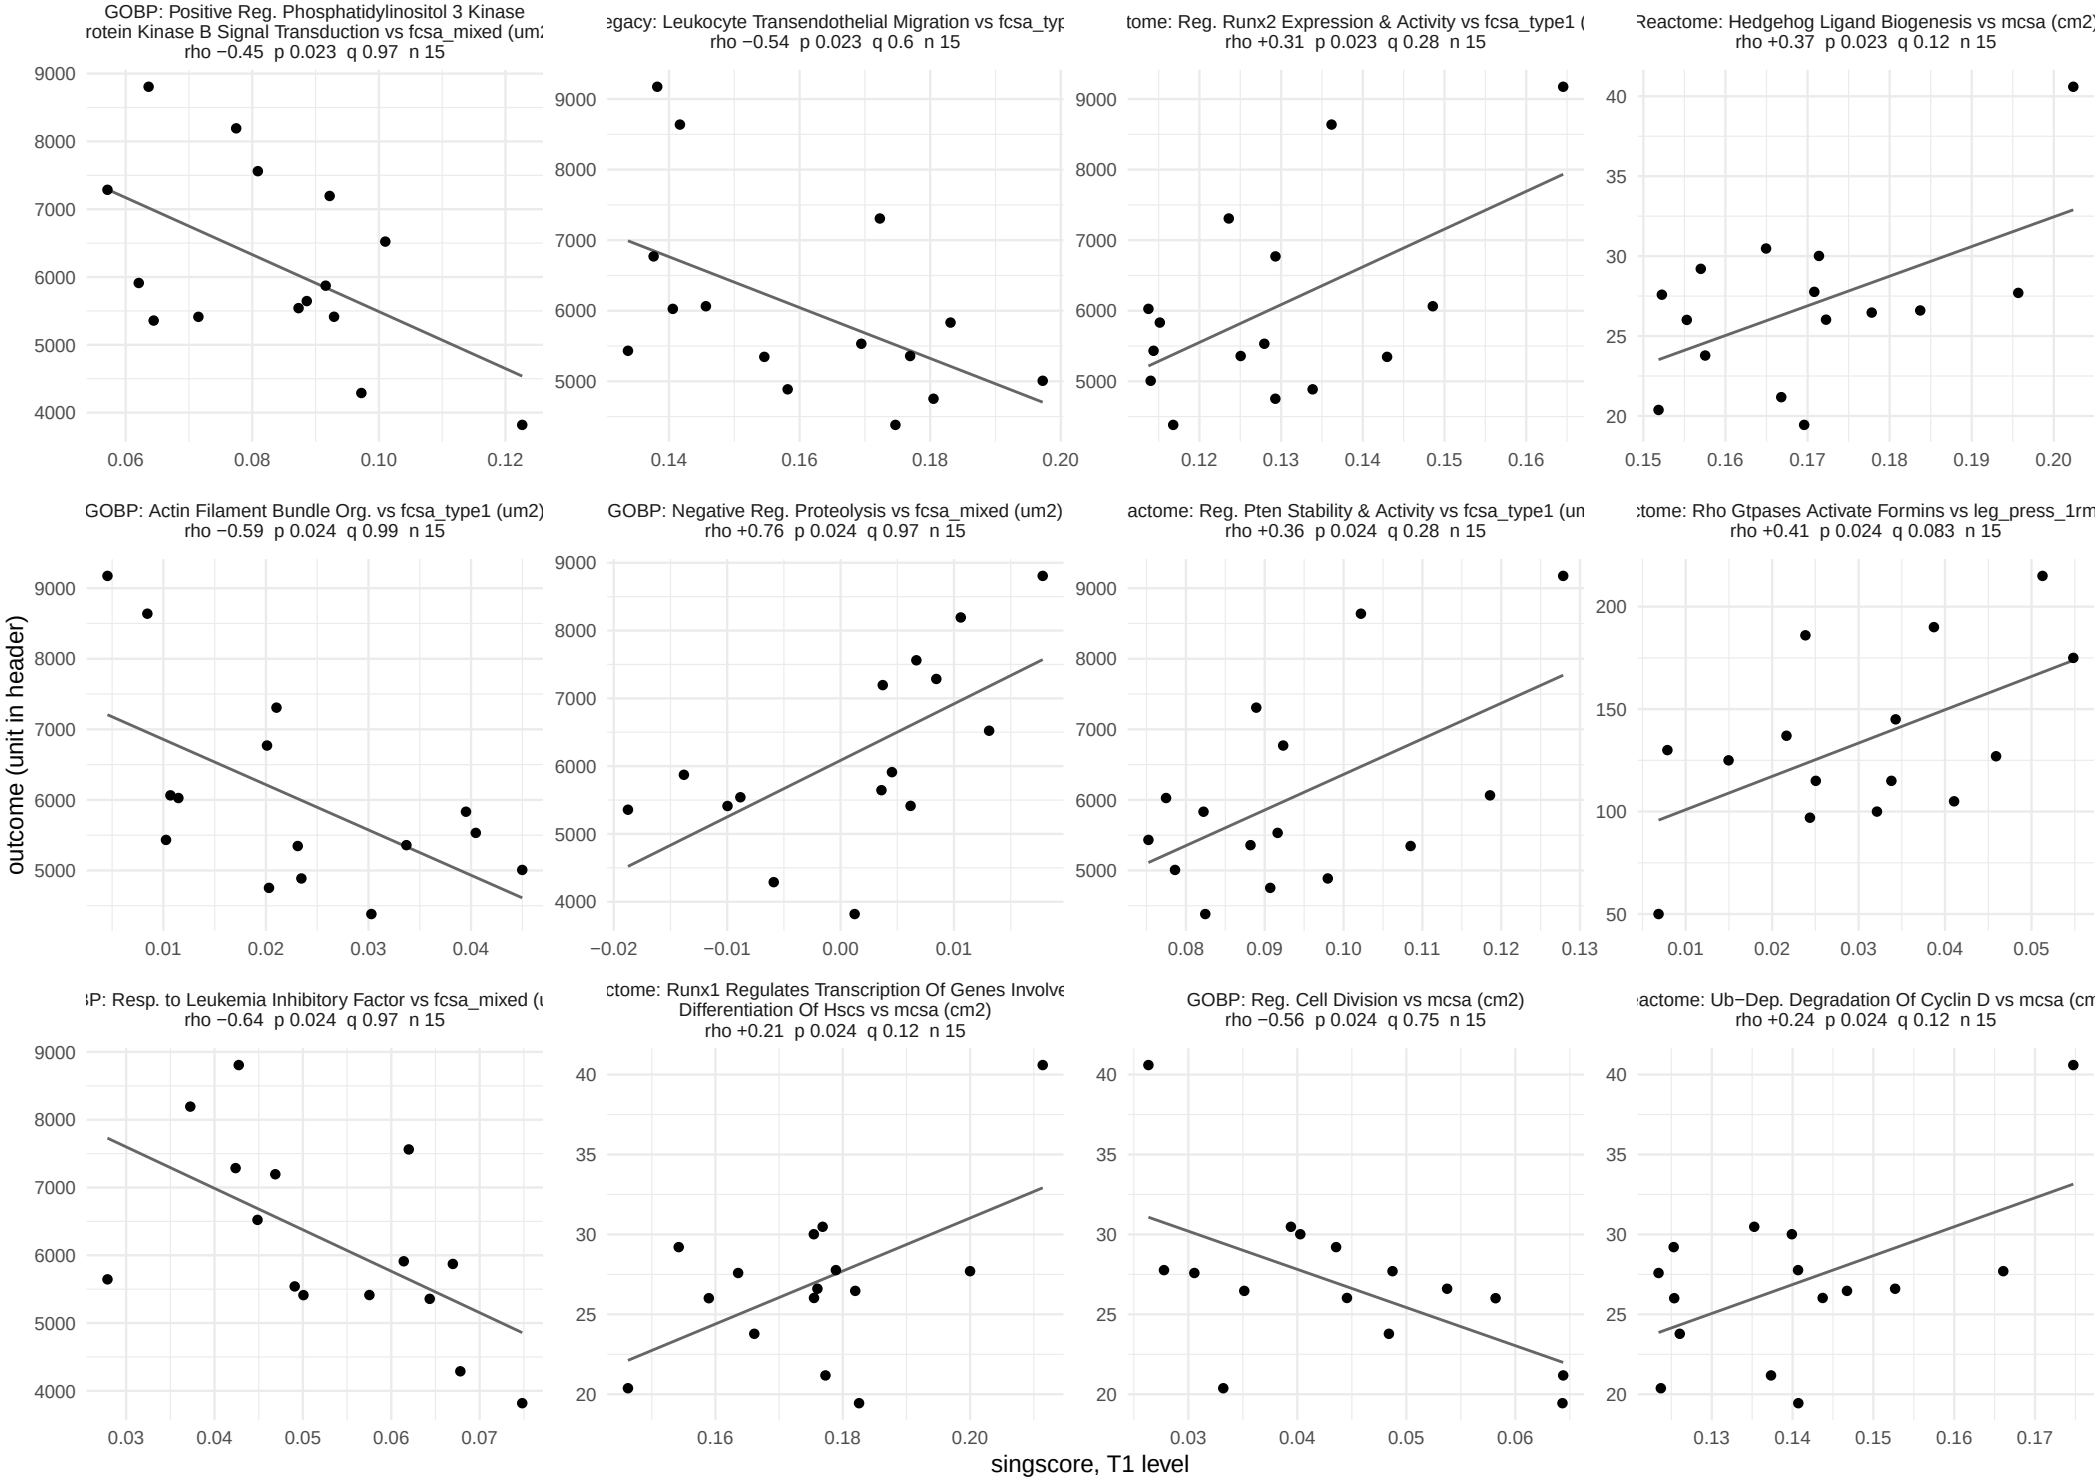

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, baseline_level window


673 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 30 of 57.

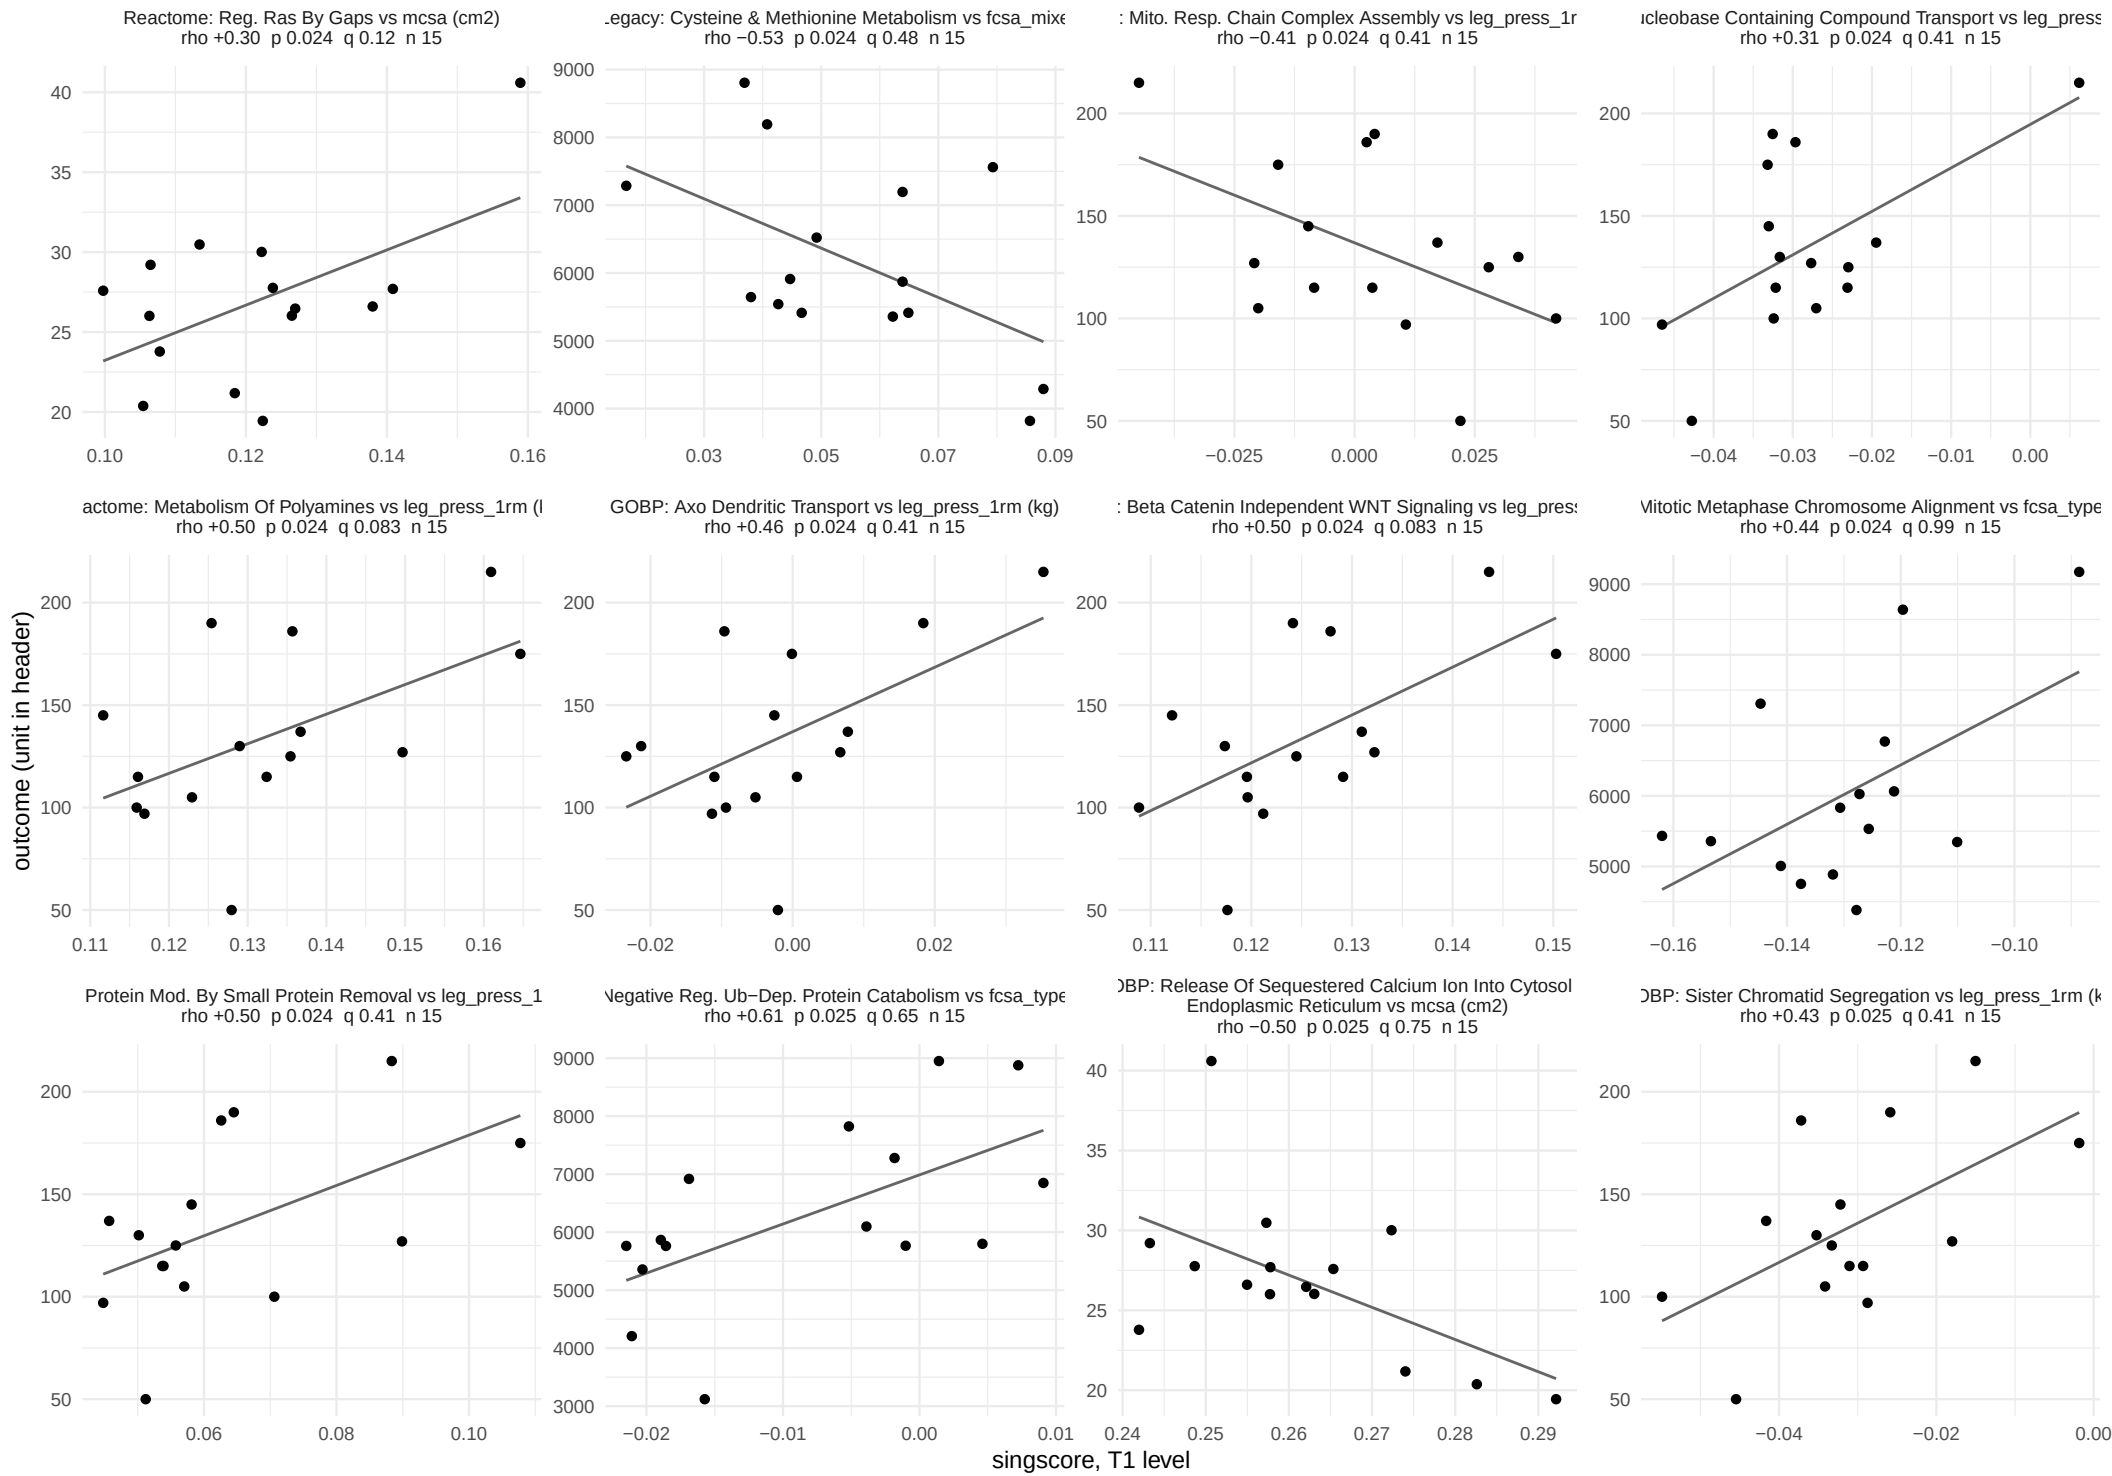

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, baseline_level window


673 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 31 of 57.

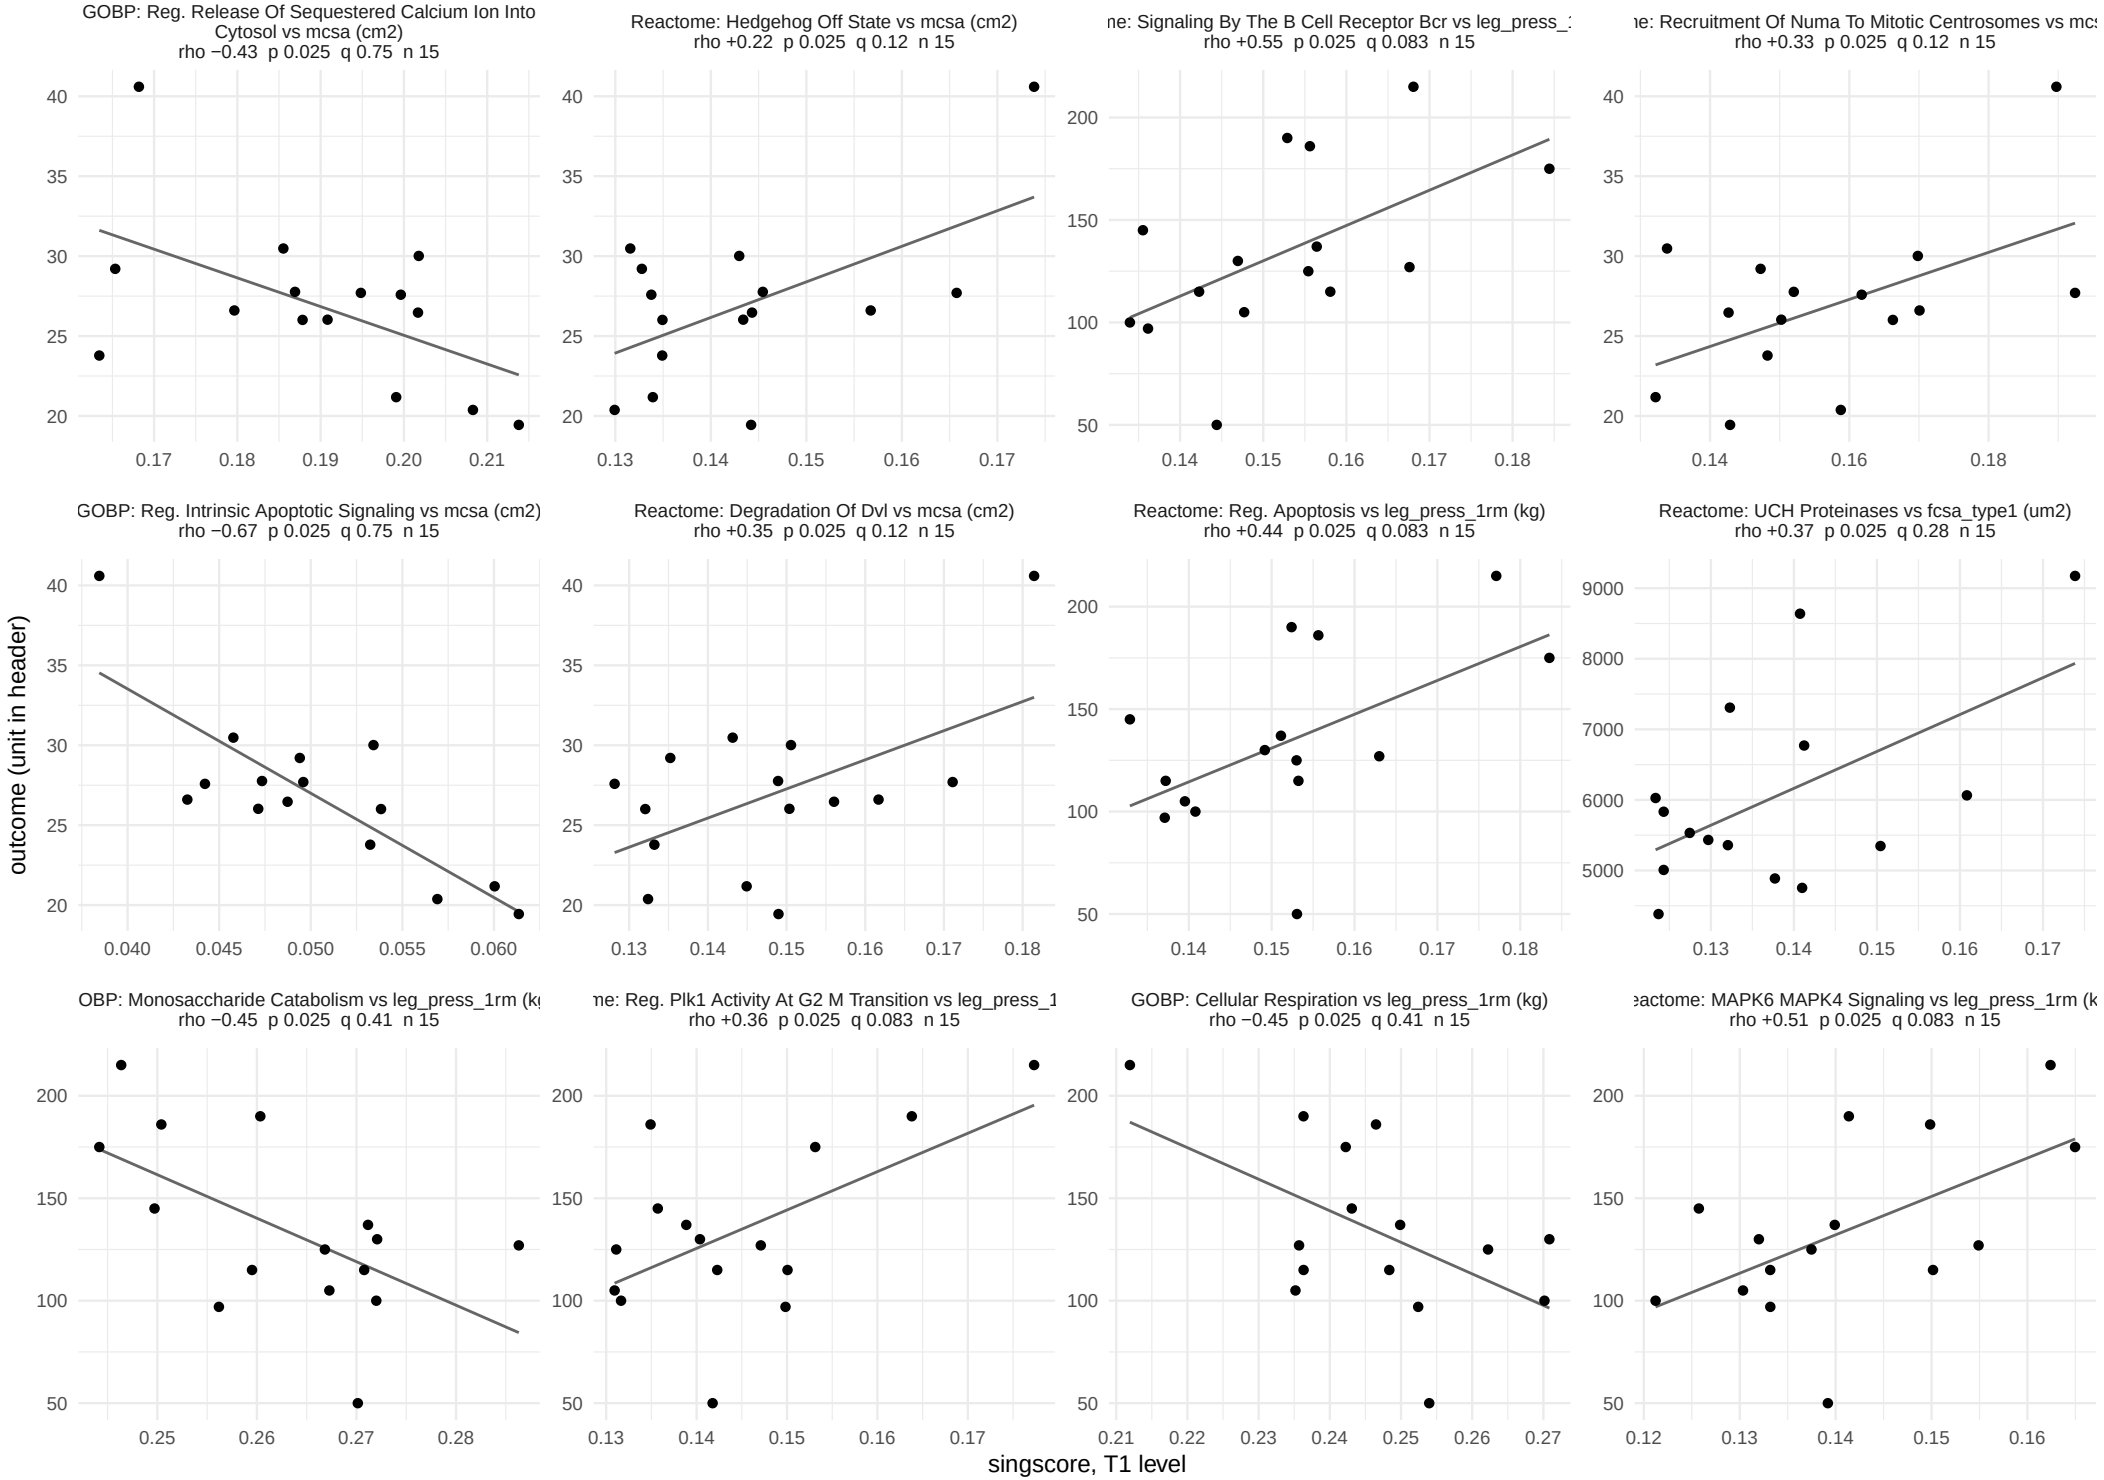

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, baseline_level window


673 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 32 of 57.

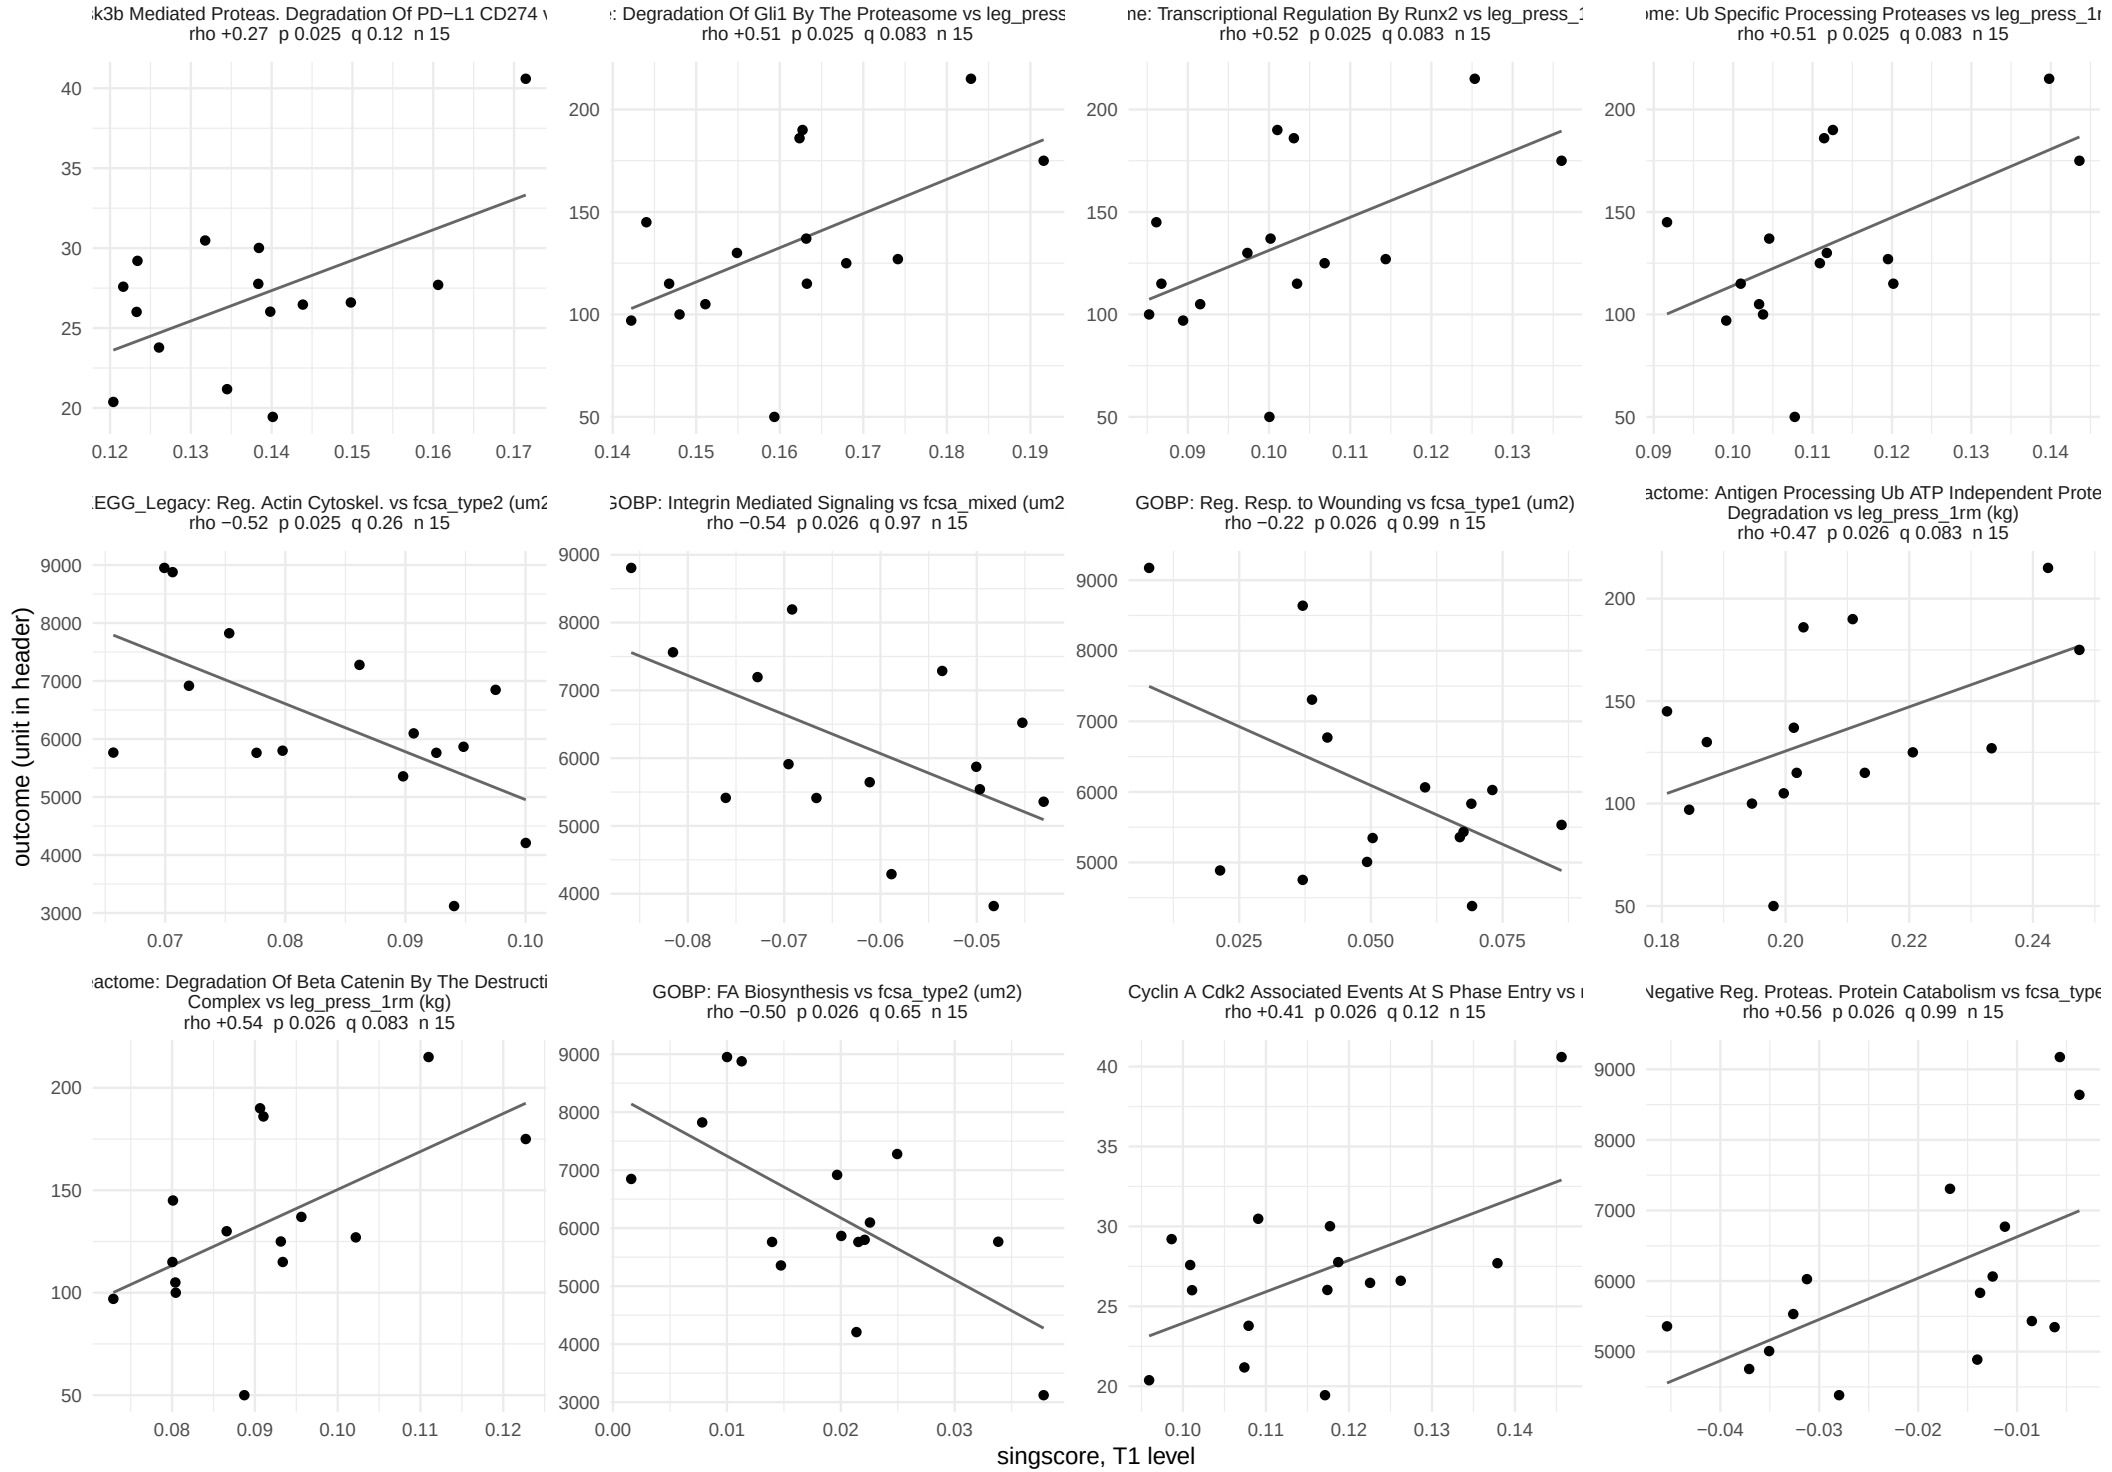

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, baseline_level window


673 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 33 of 57.

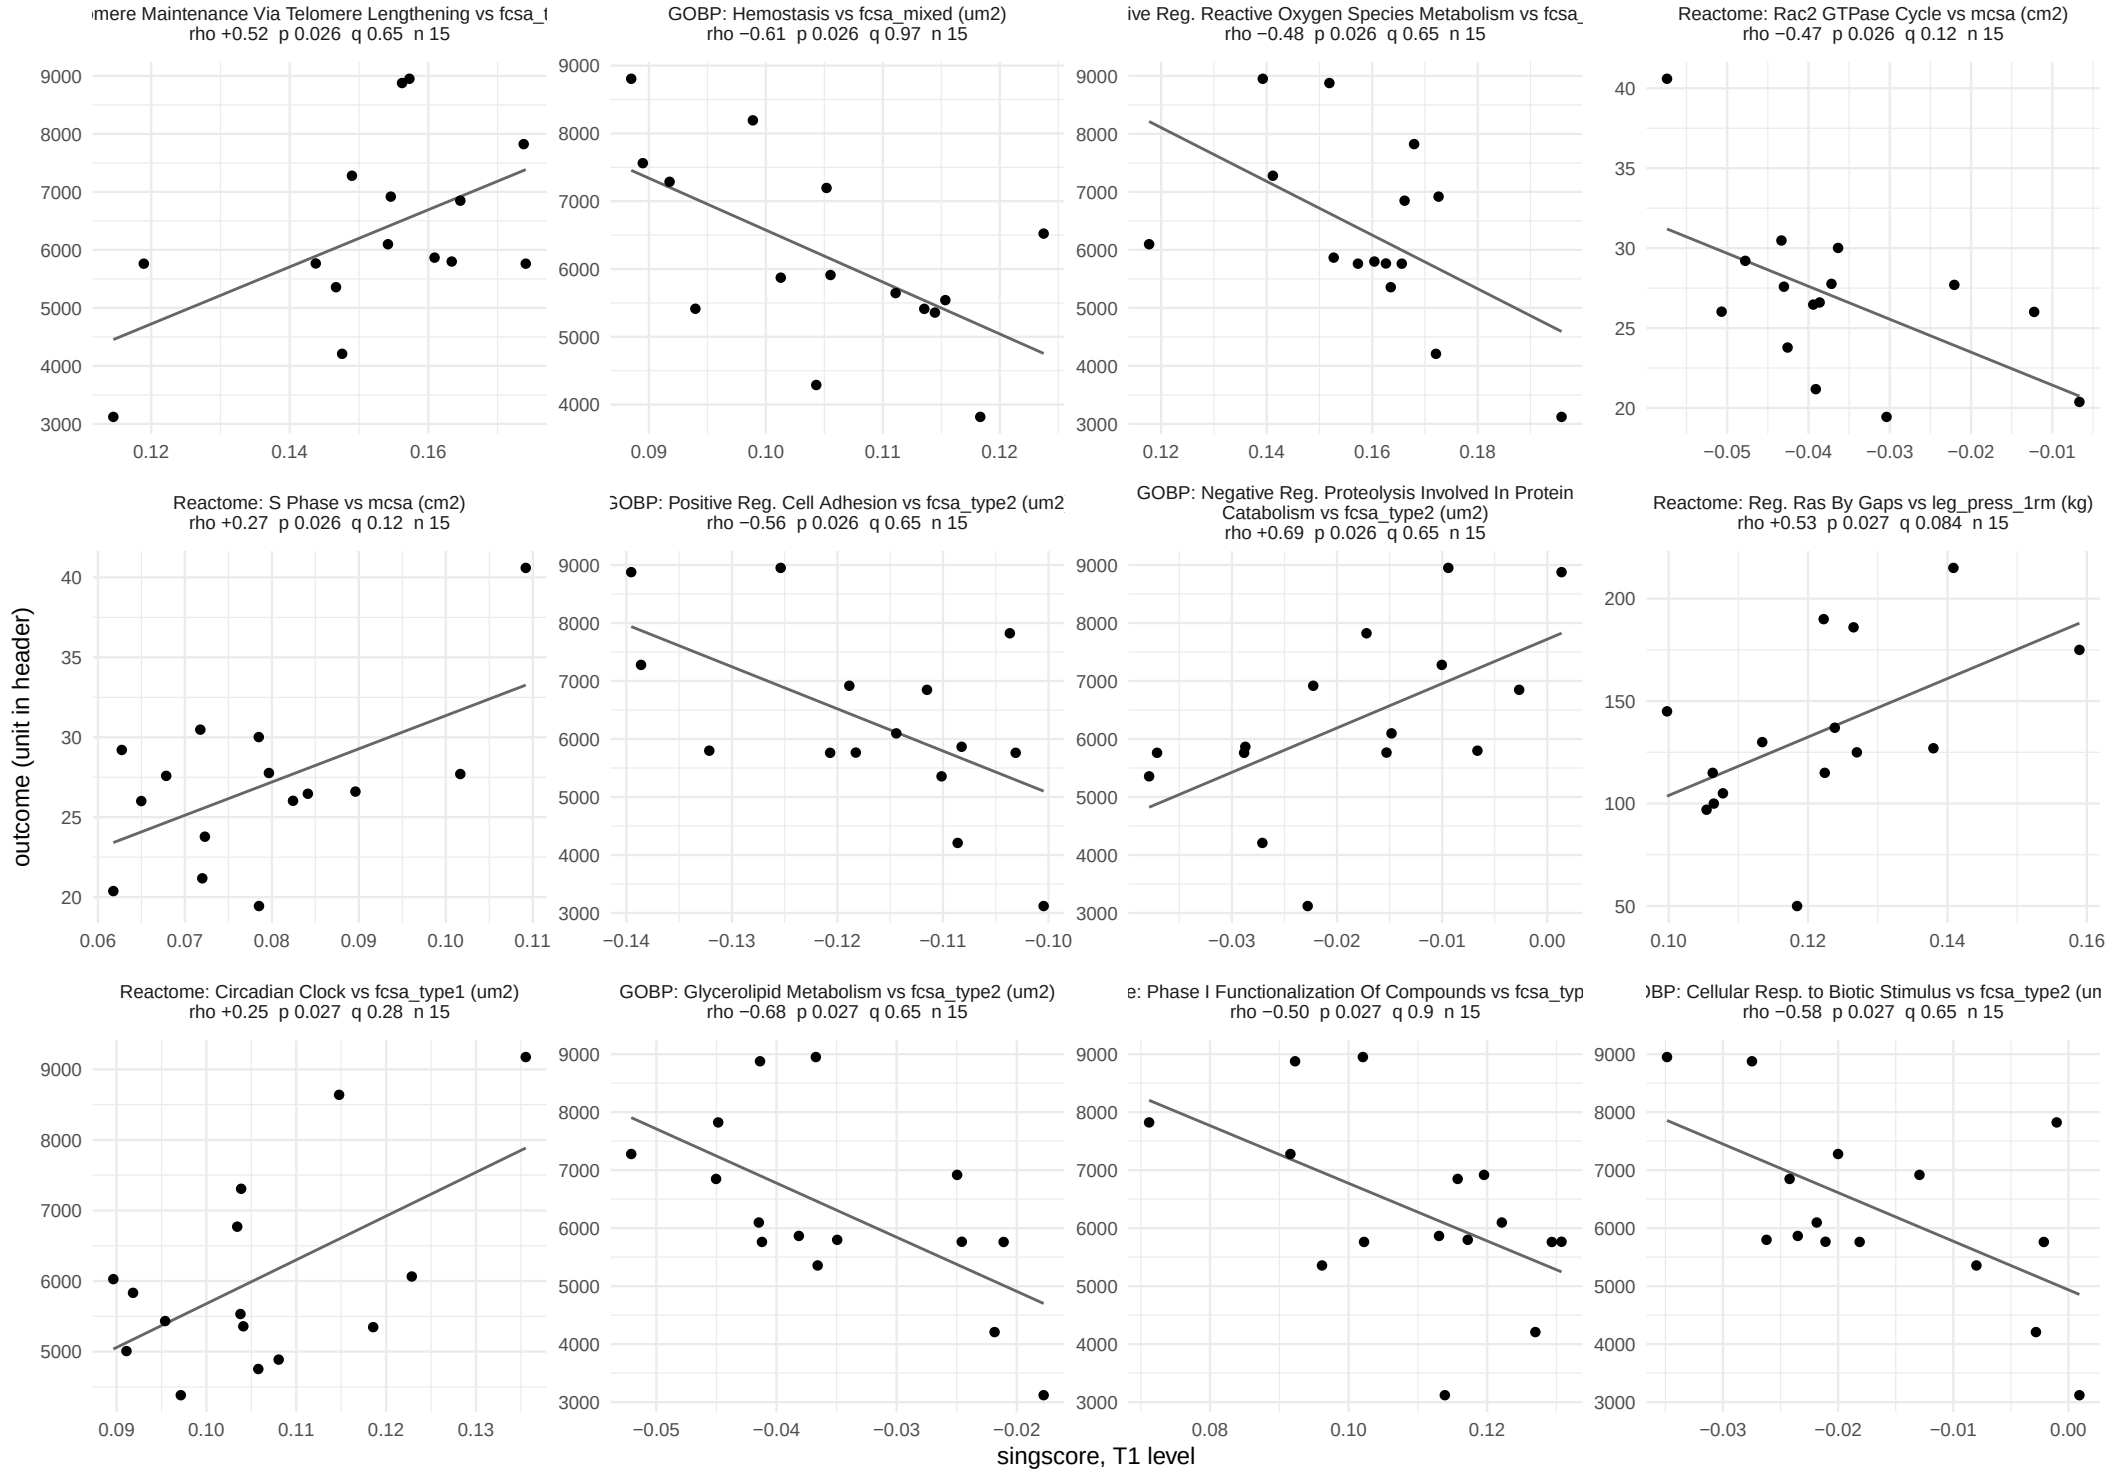

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, baseline_level window


673 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 34 of 57.

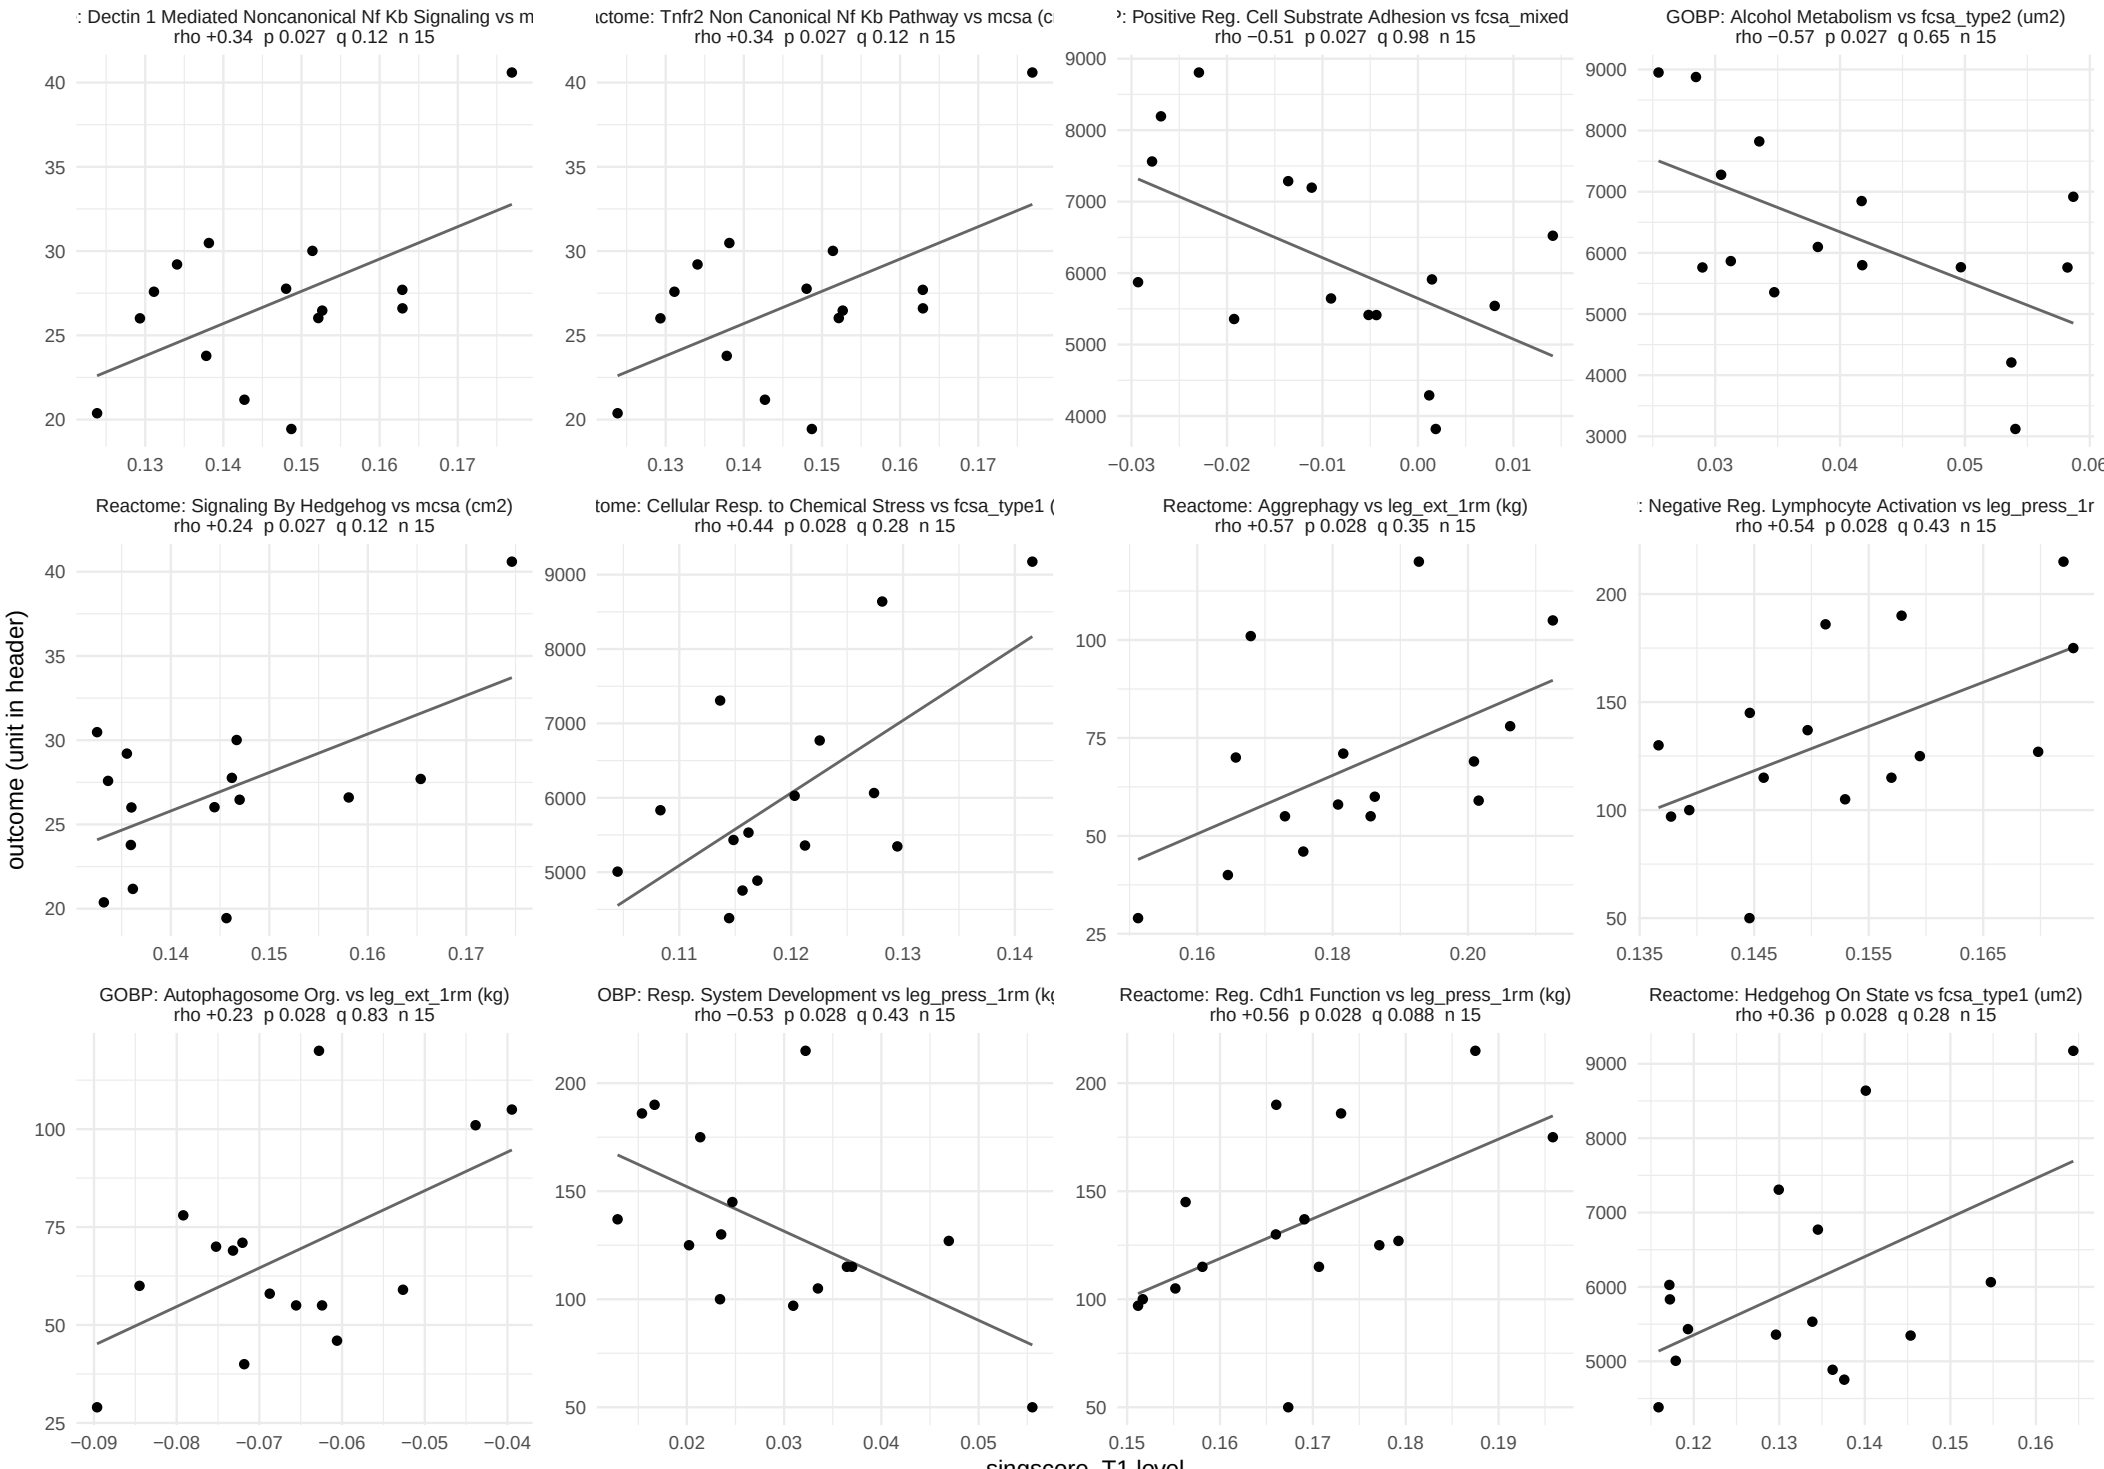

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, baseline_level window


673 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 35 of 57.

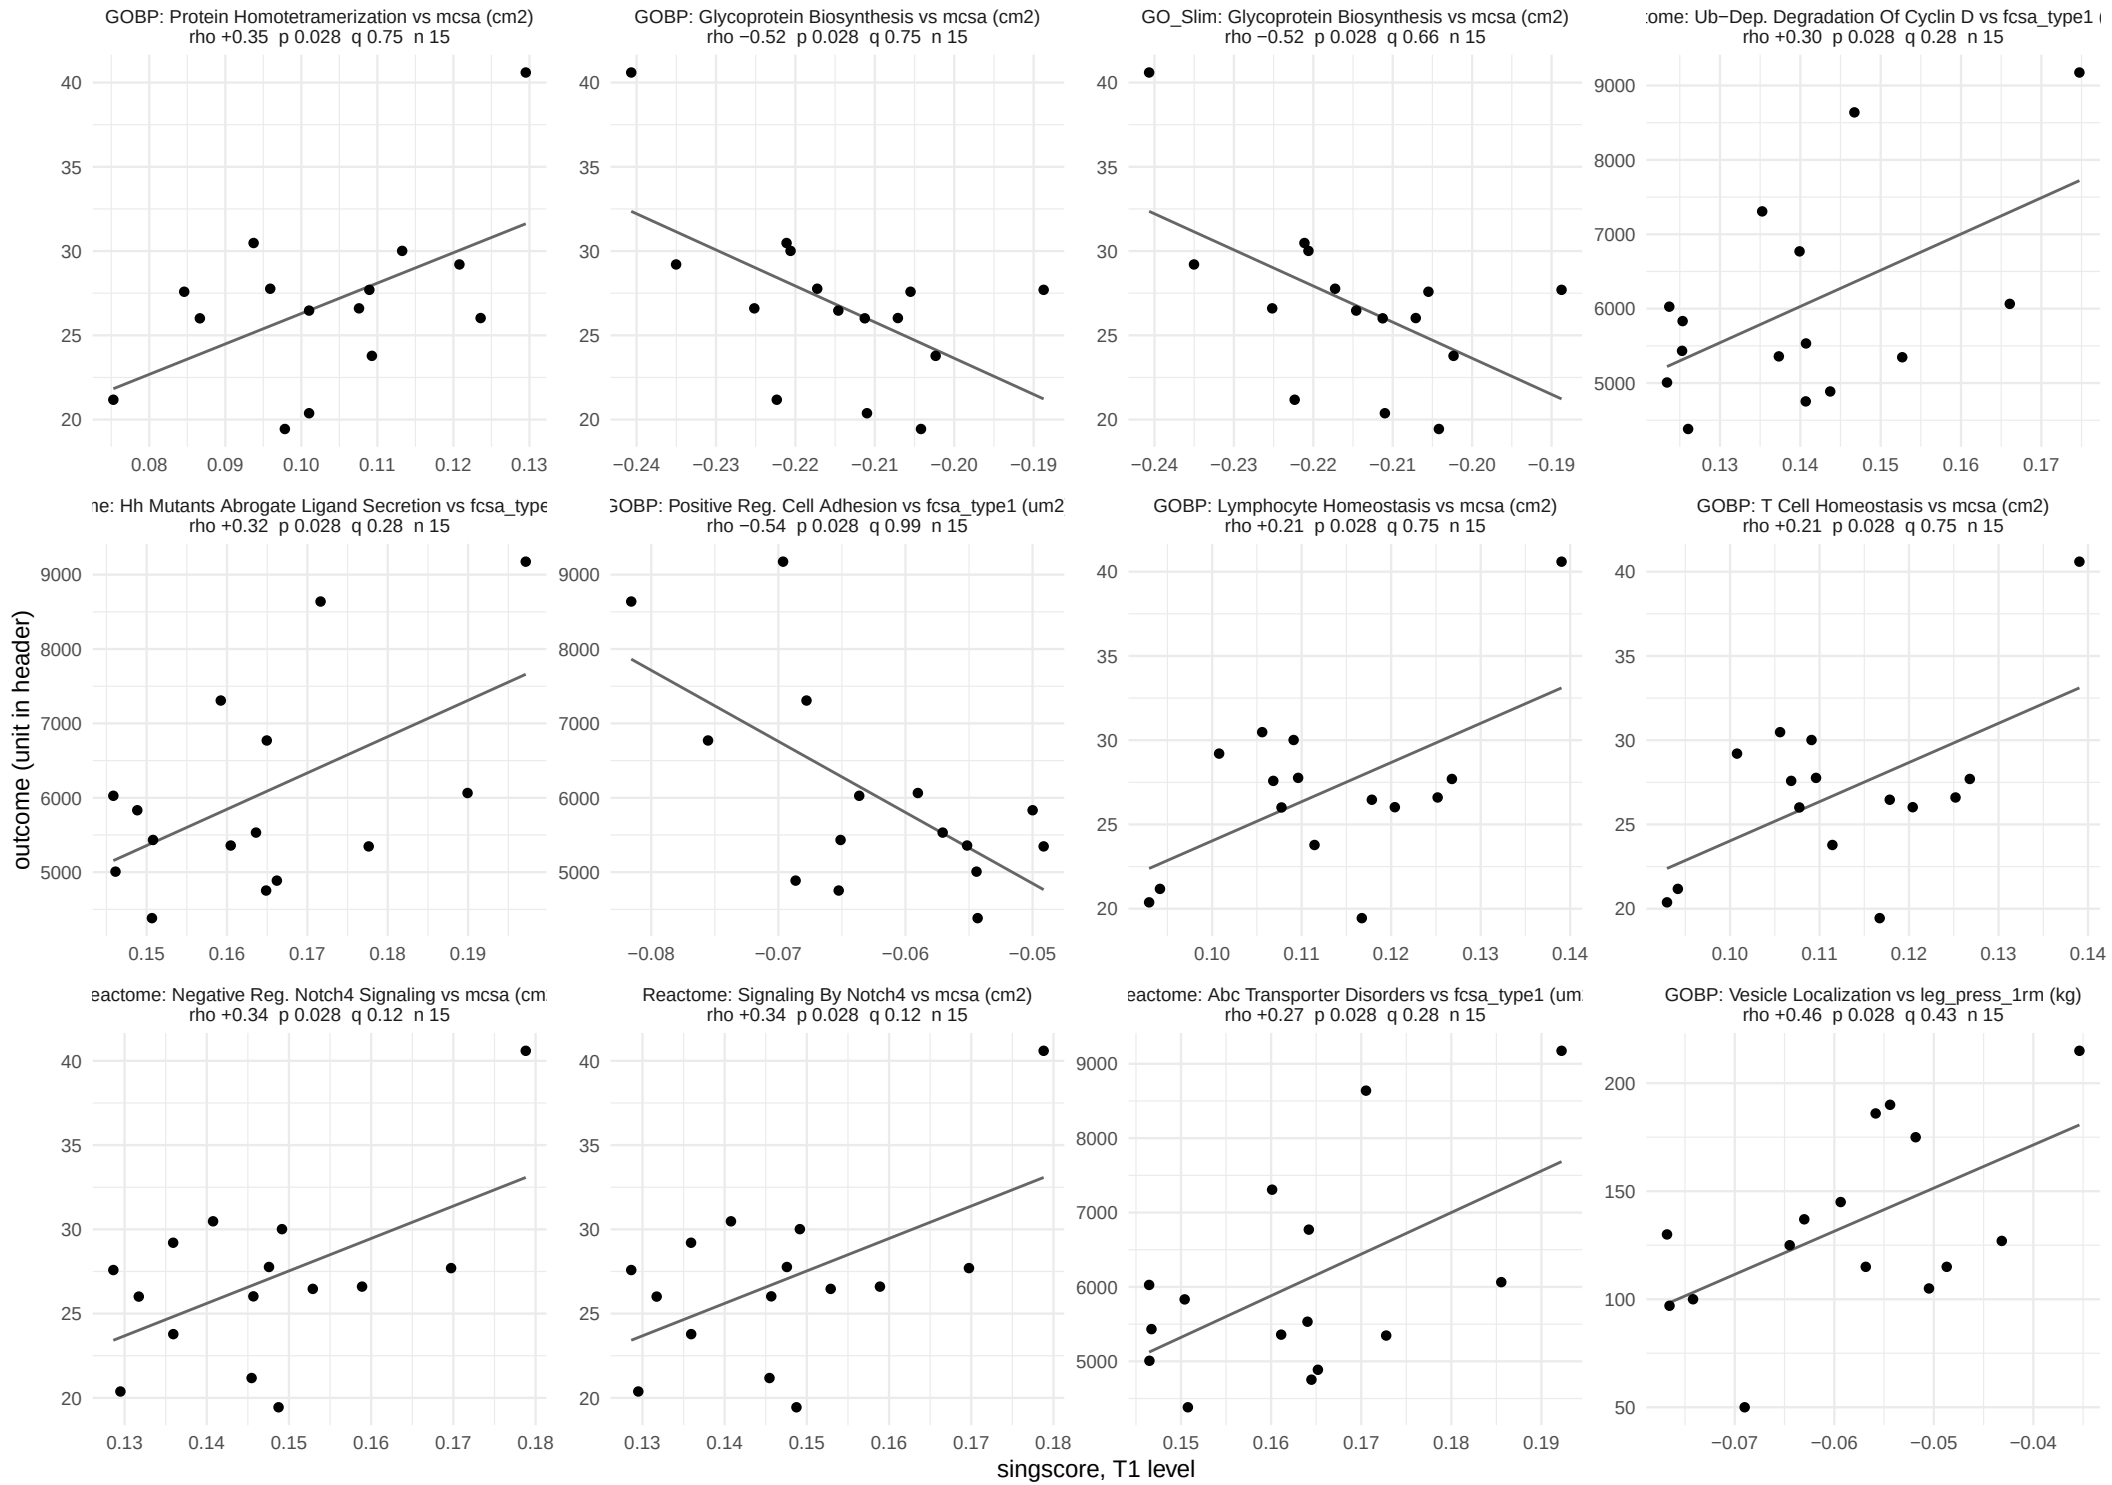

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, baseline_level window


673 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 36 of 57.

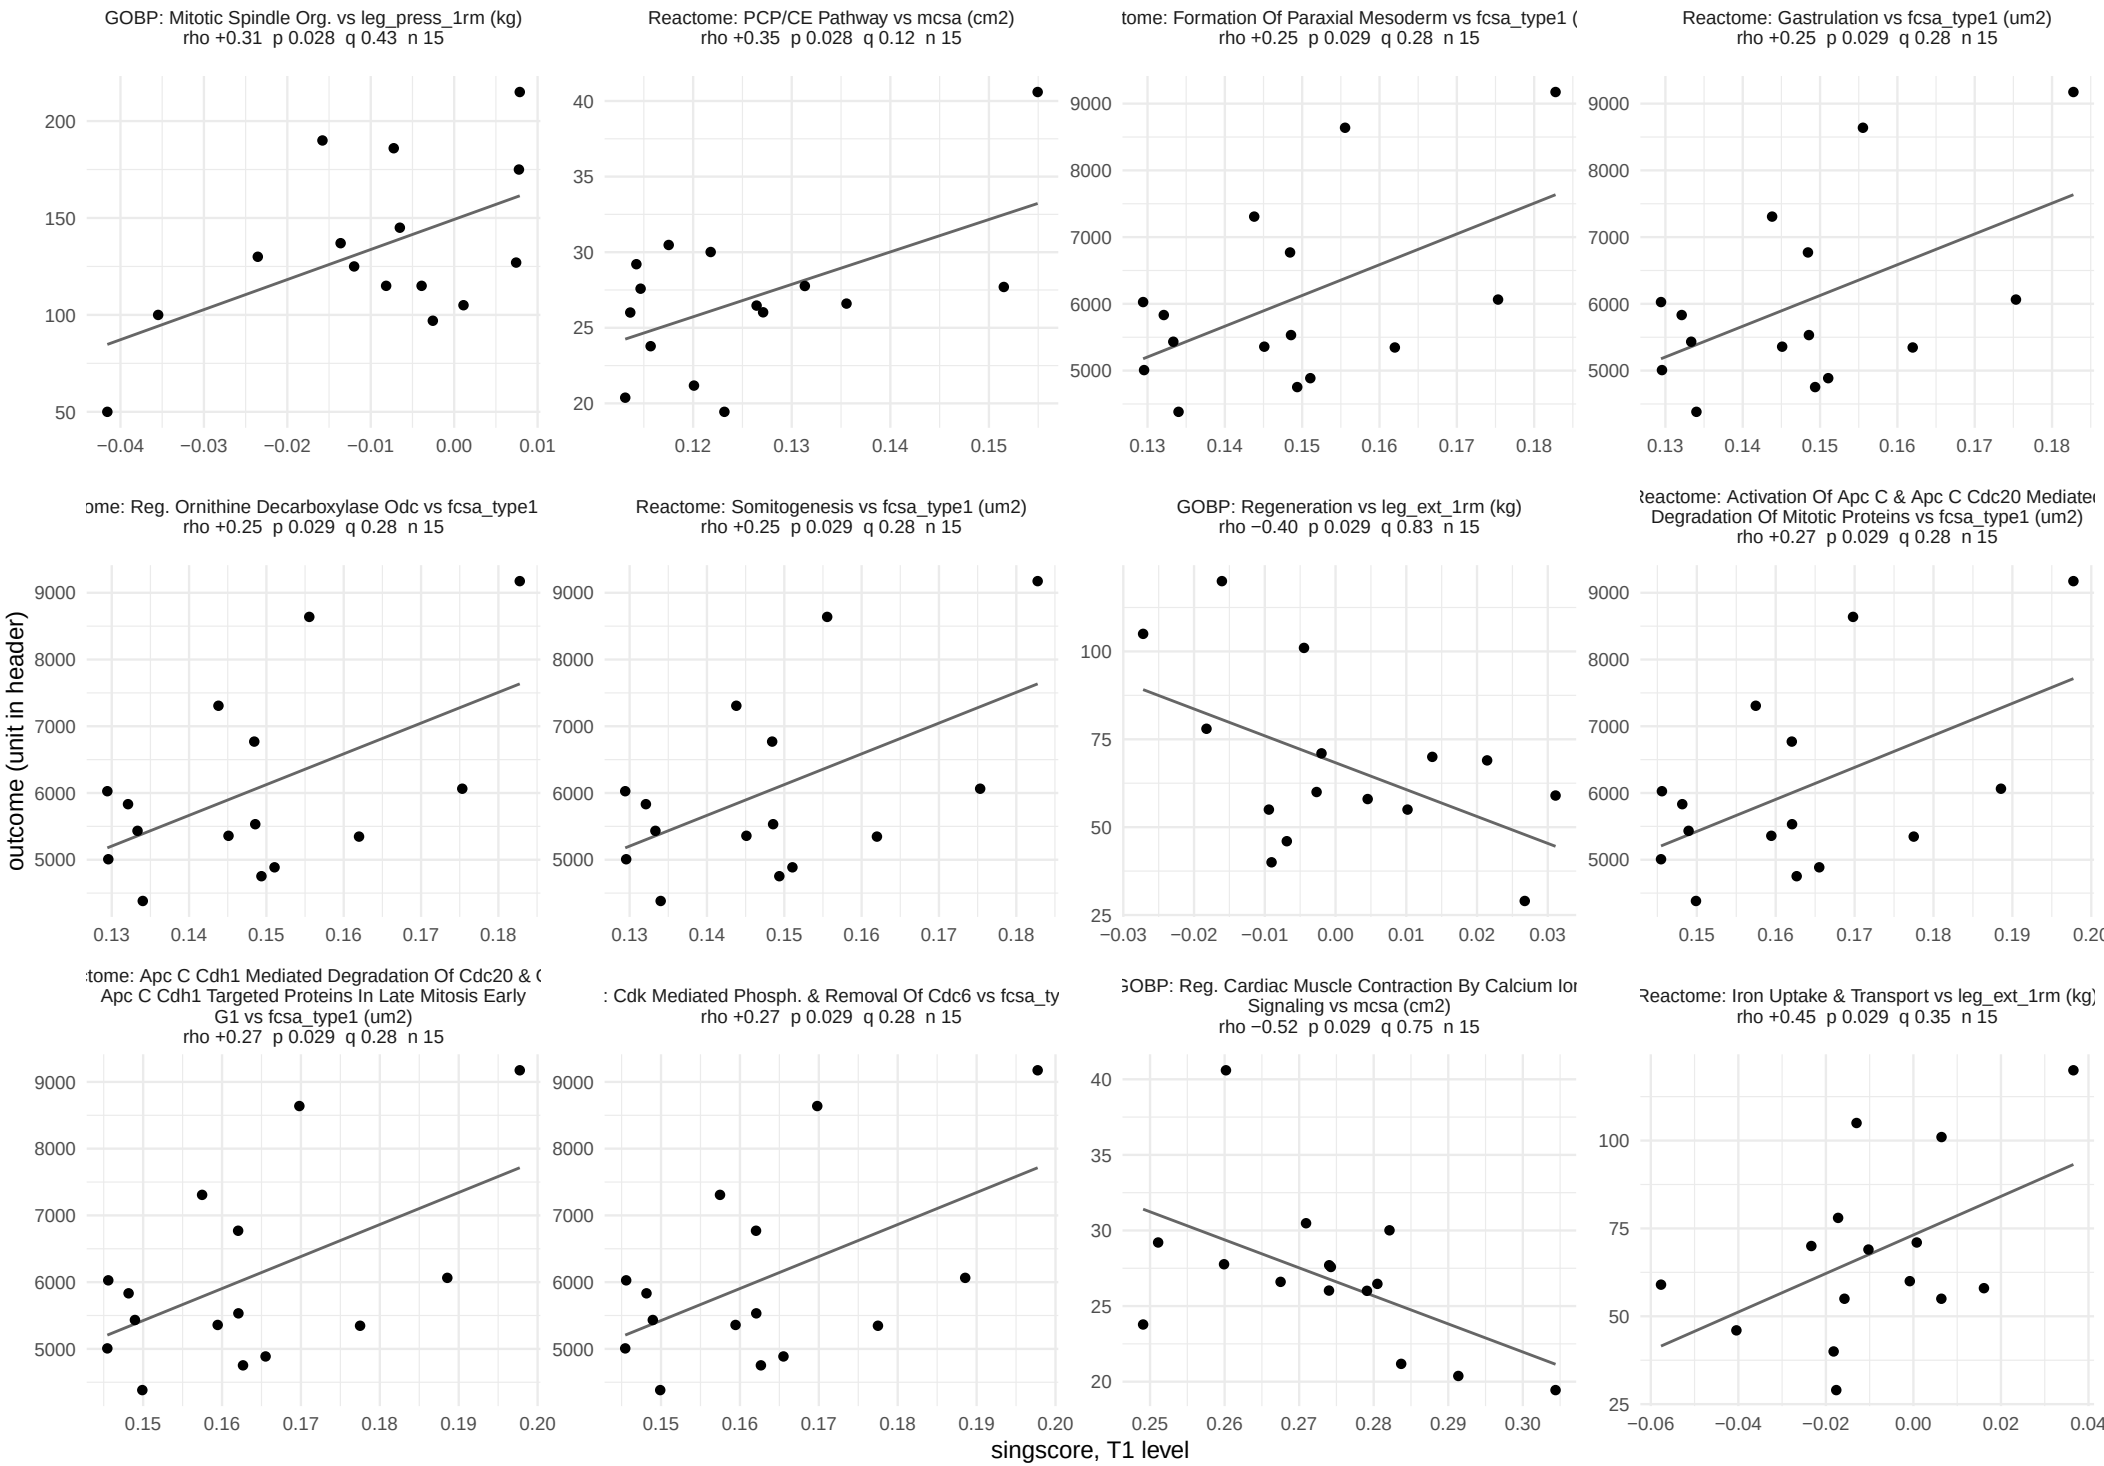

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, baseline_level window


673 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 37 of 57.

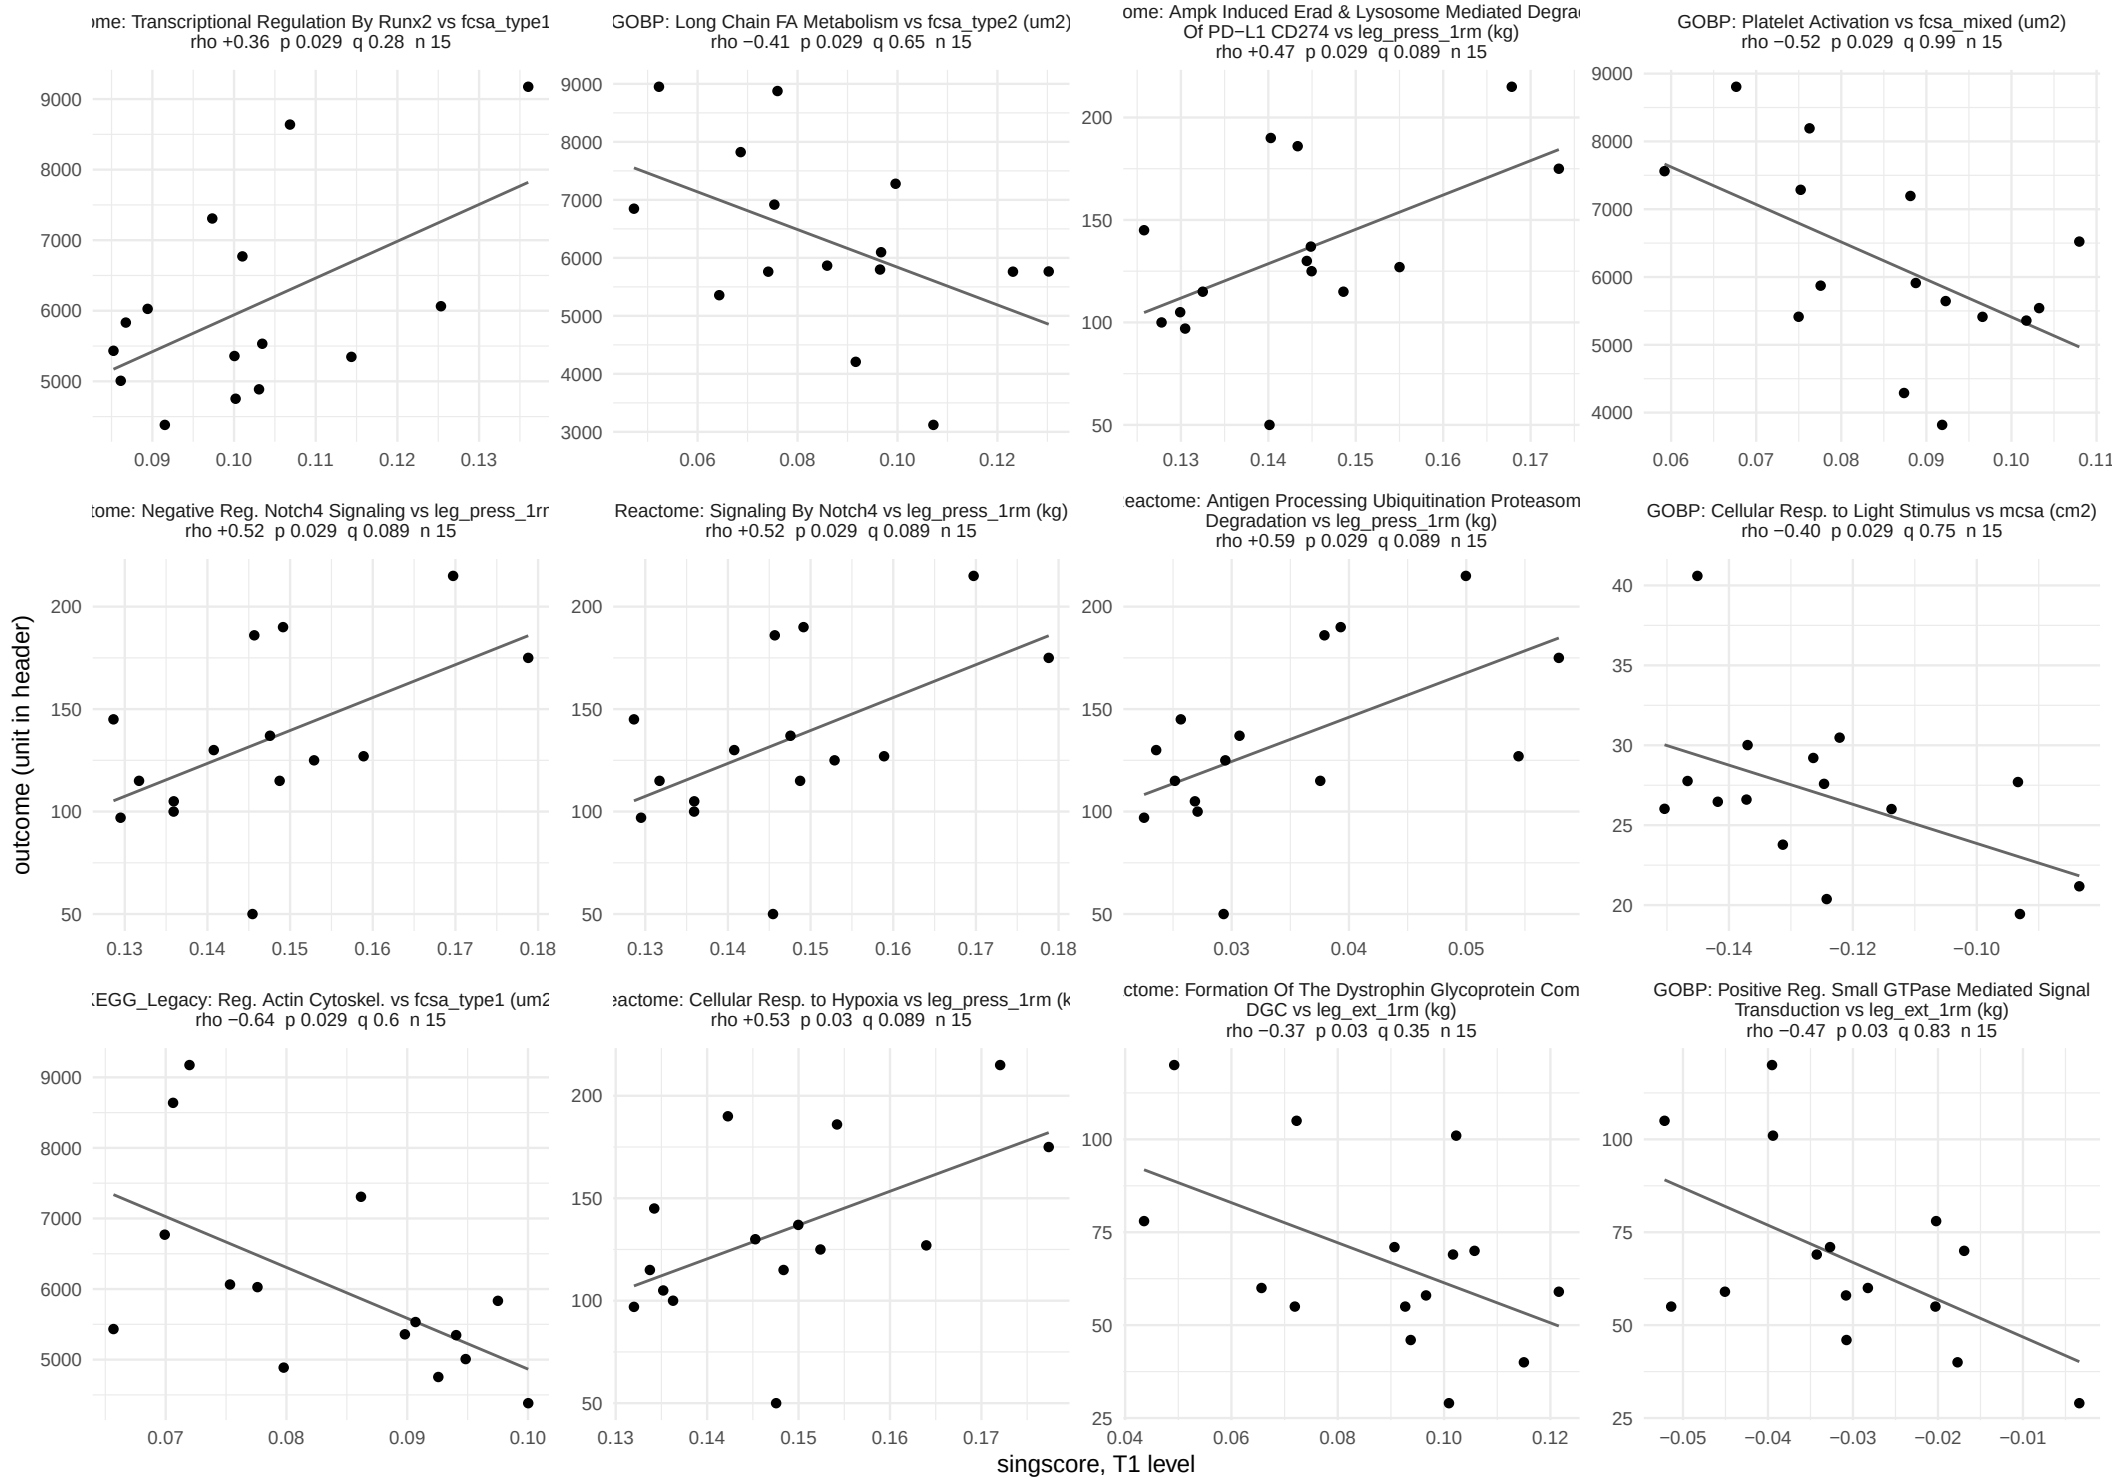

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, baseline_level window


673 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 38 of 57.

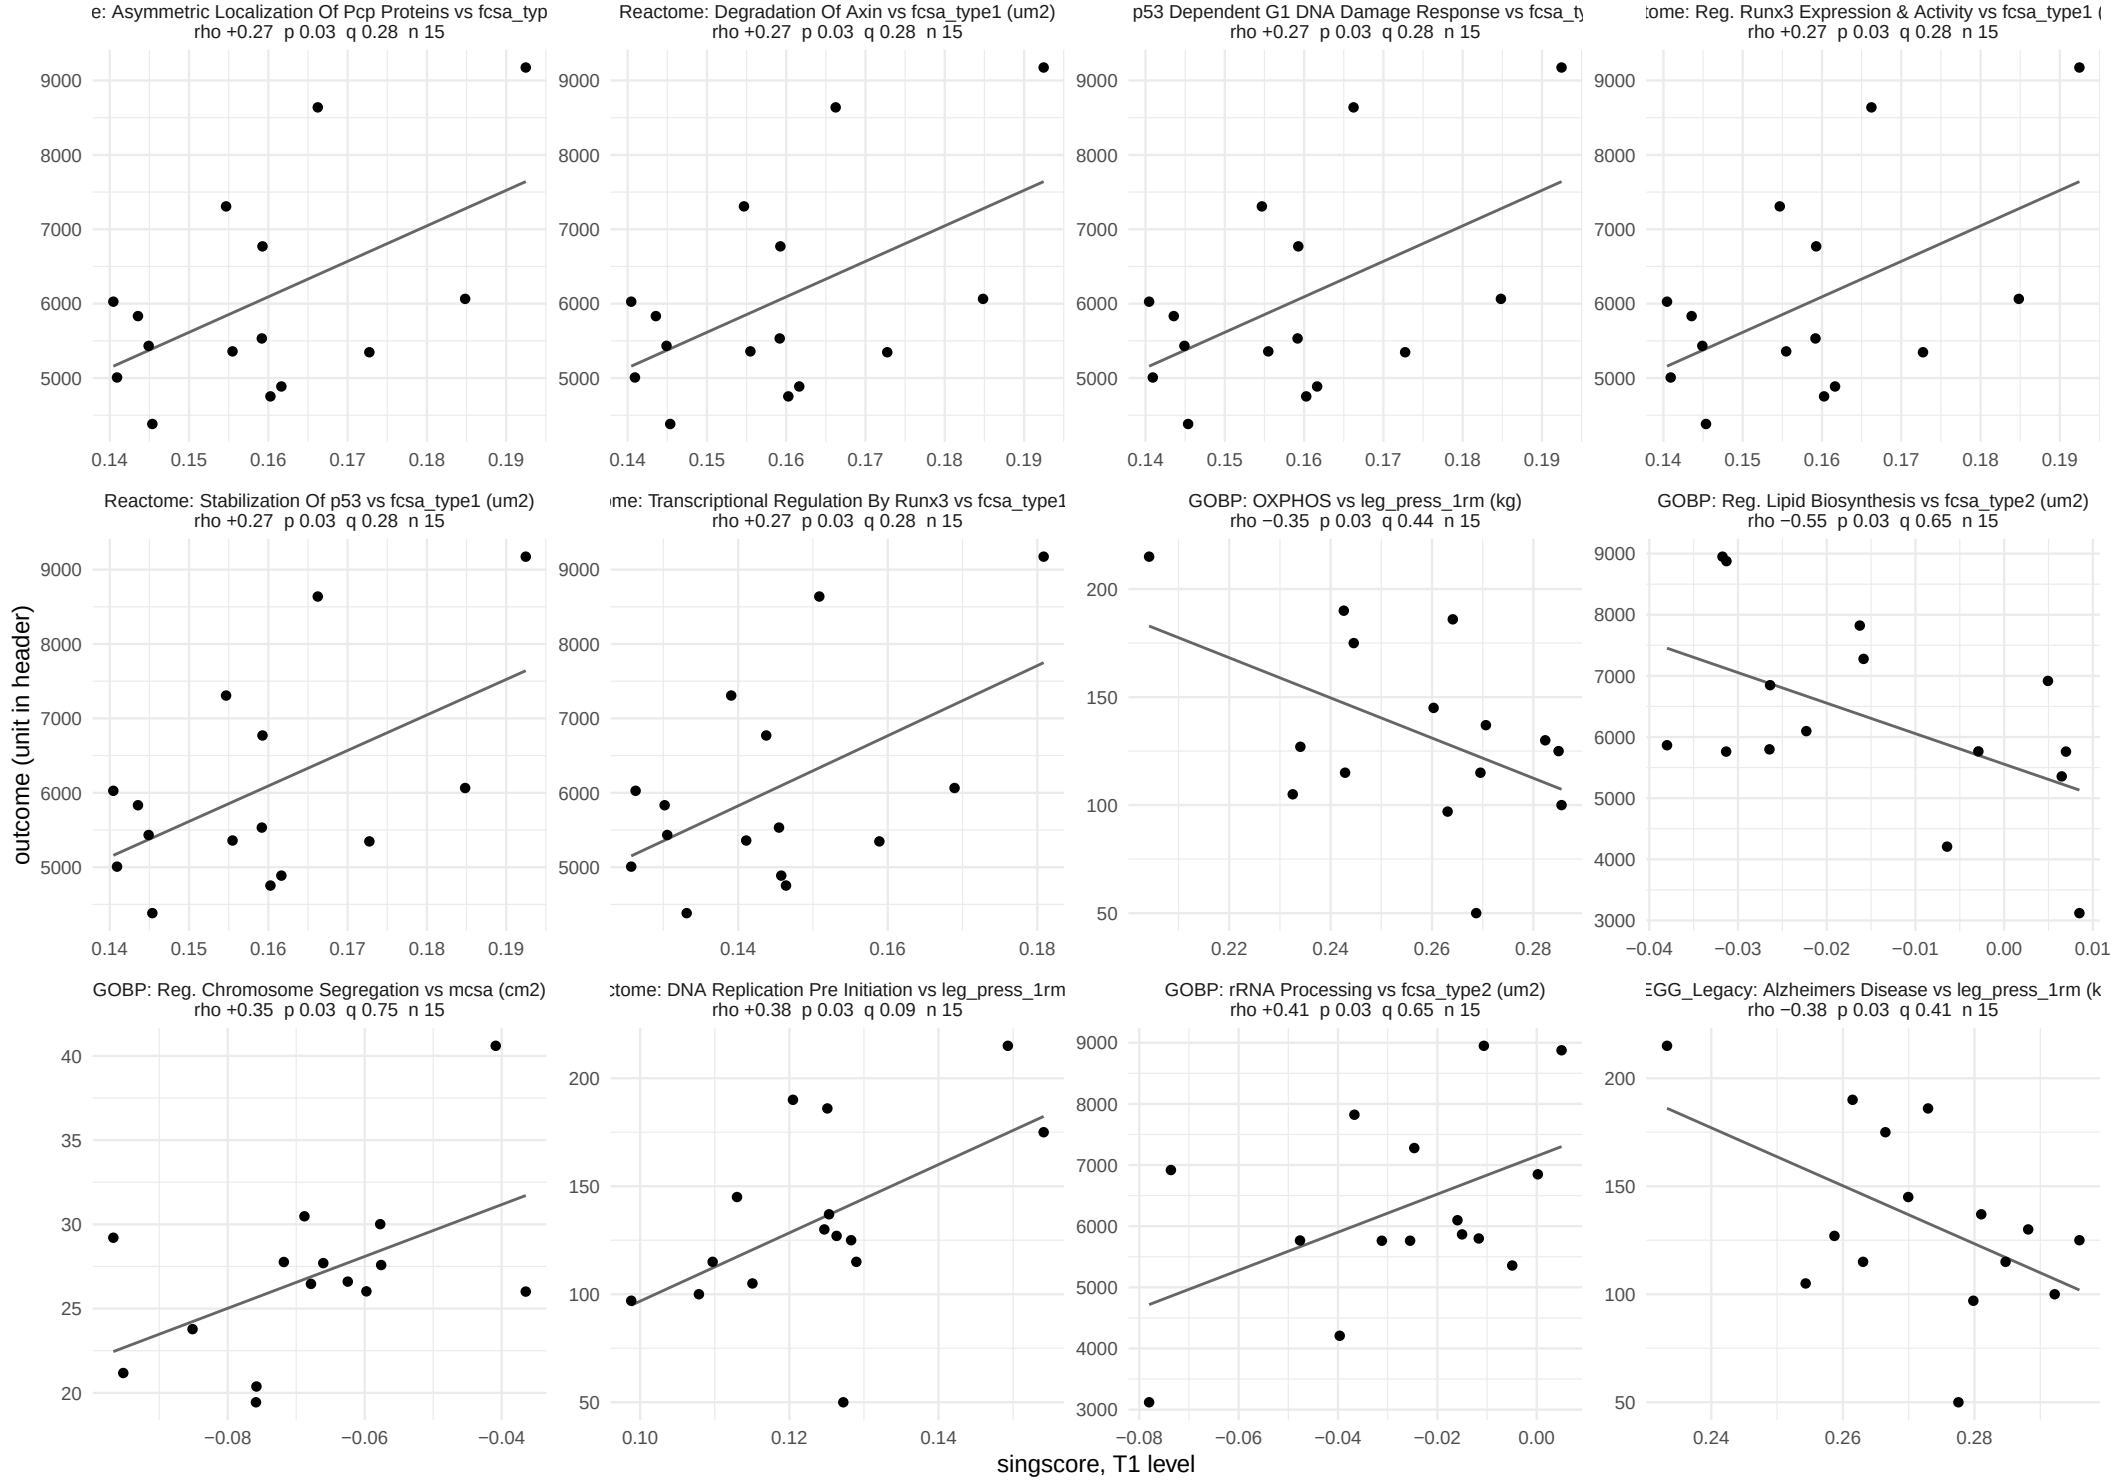

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, baseline_level window


673 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 39 of 57.

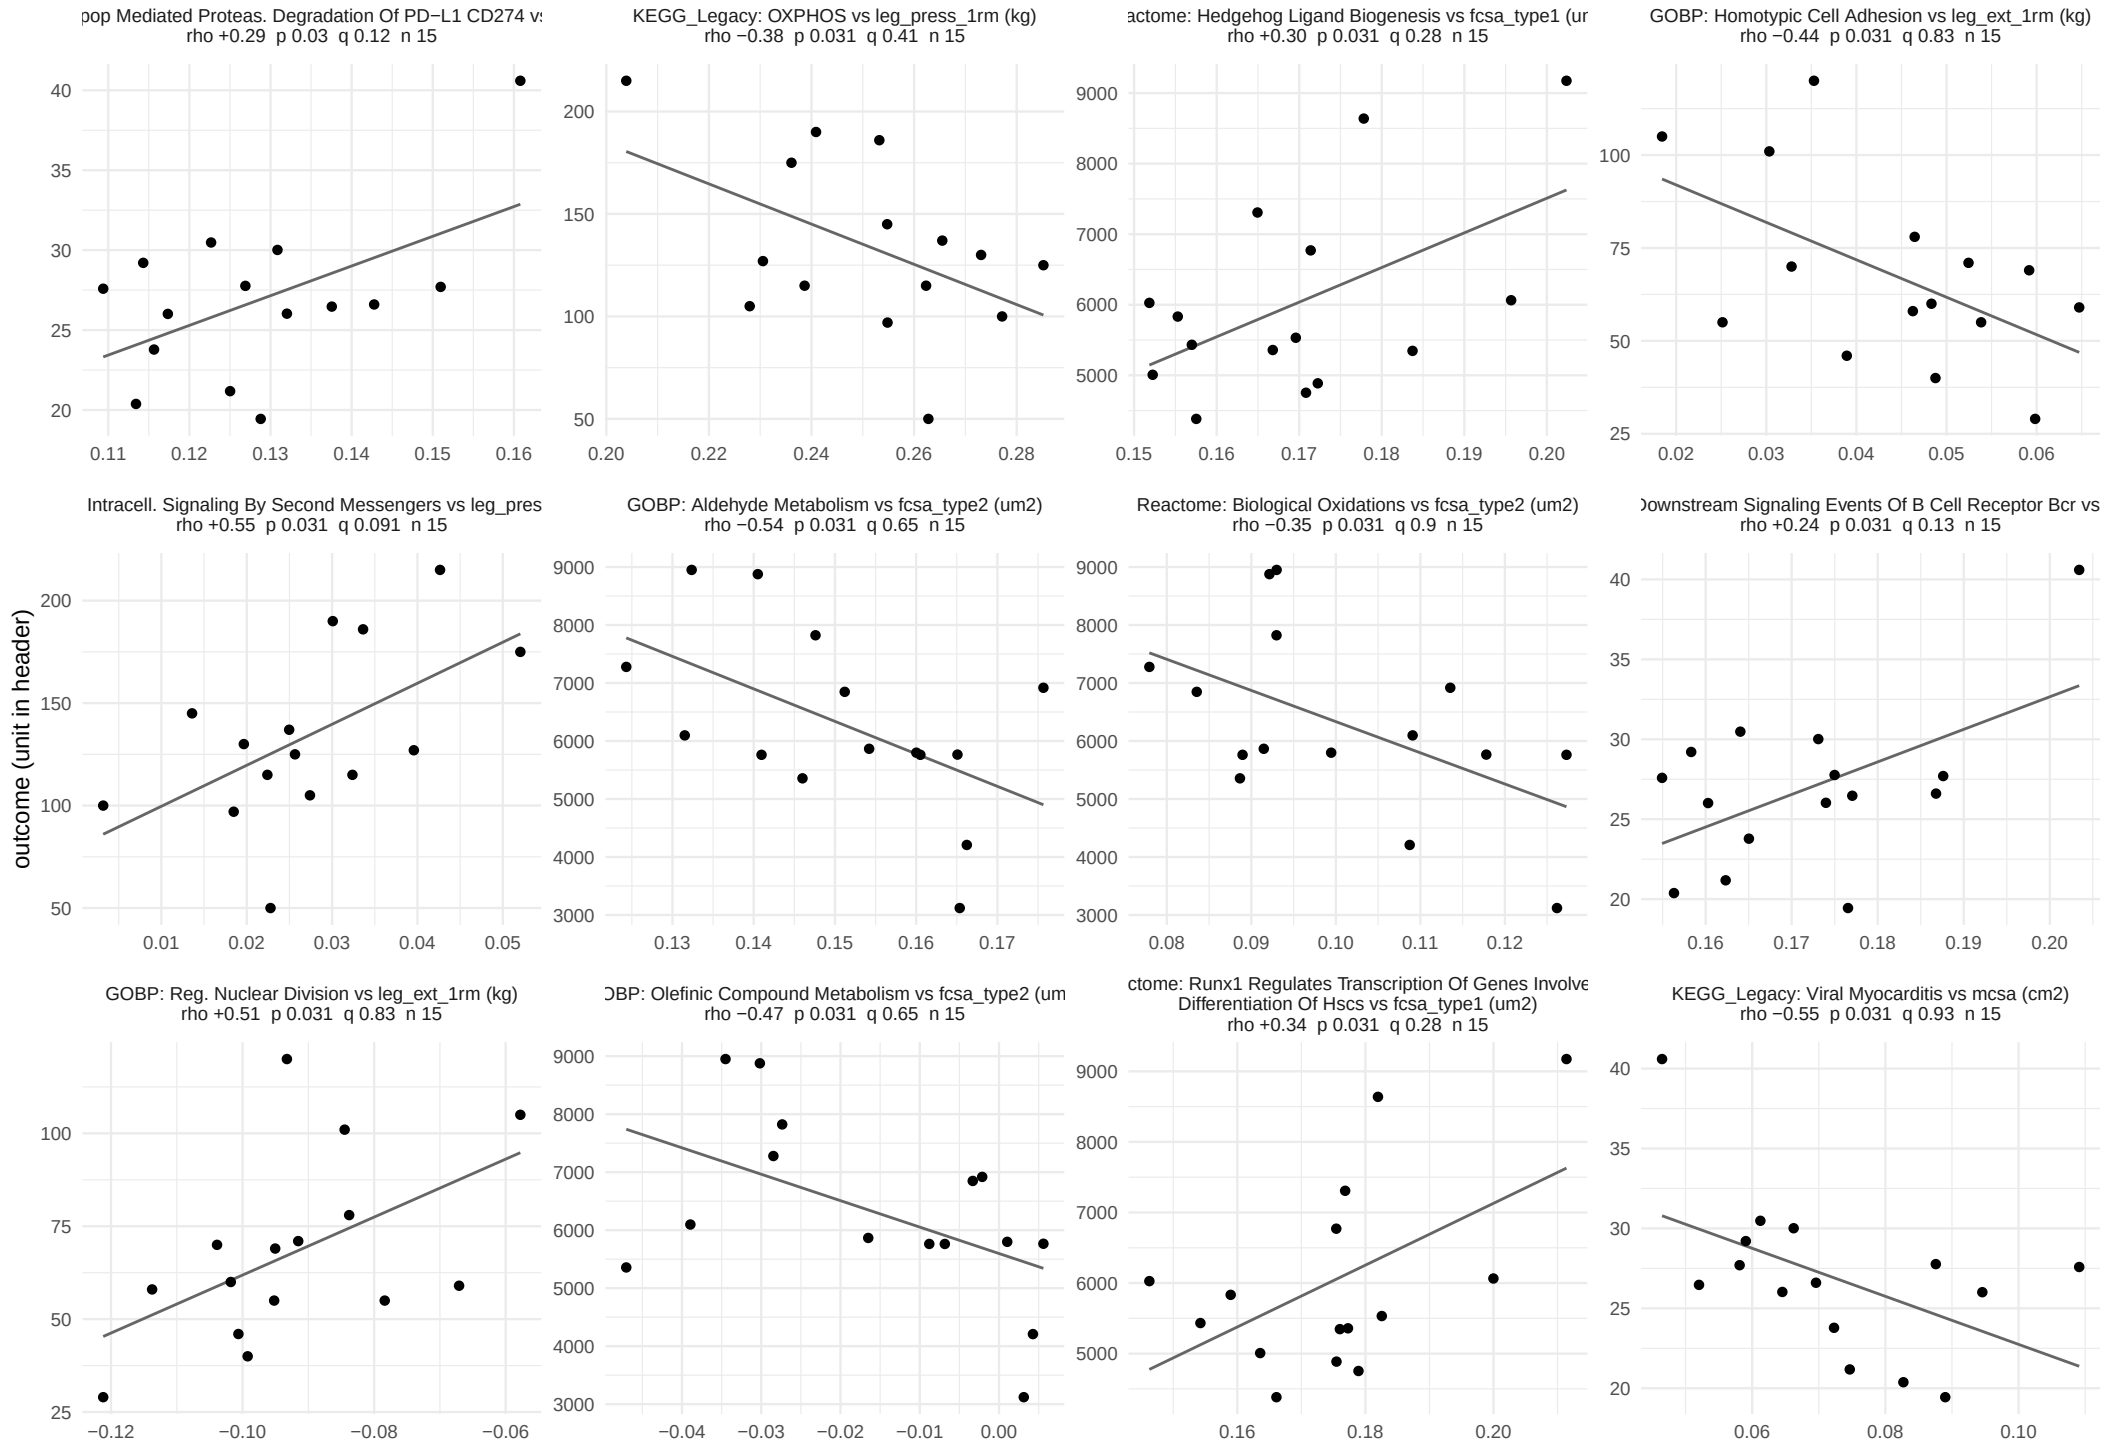

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, baseline_level window


673 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 40 of 57.

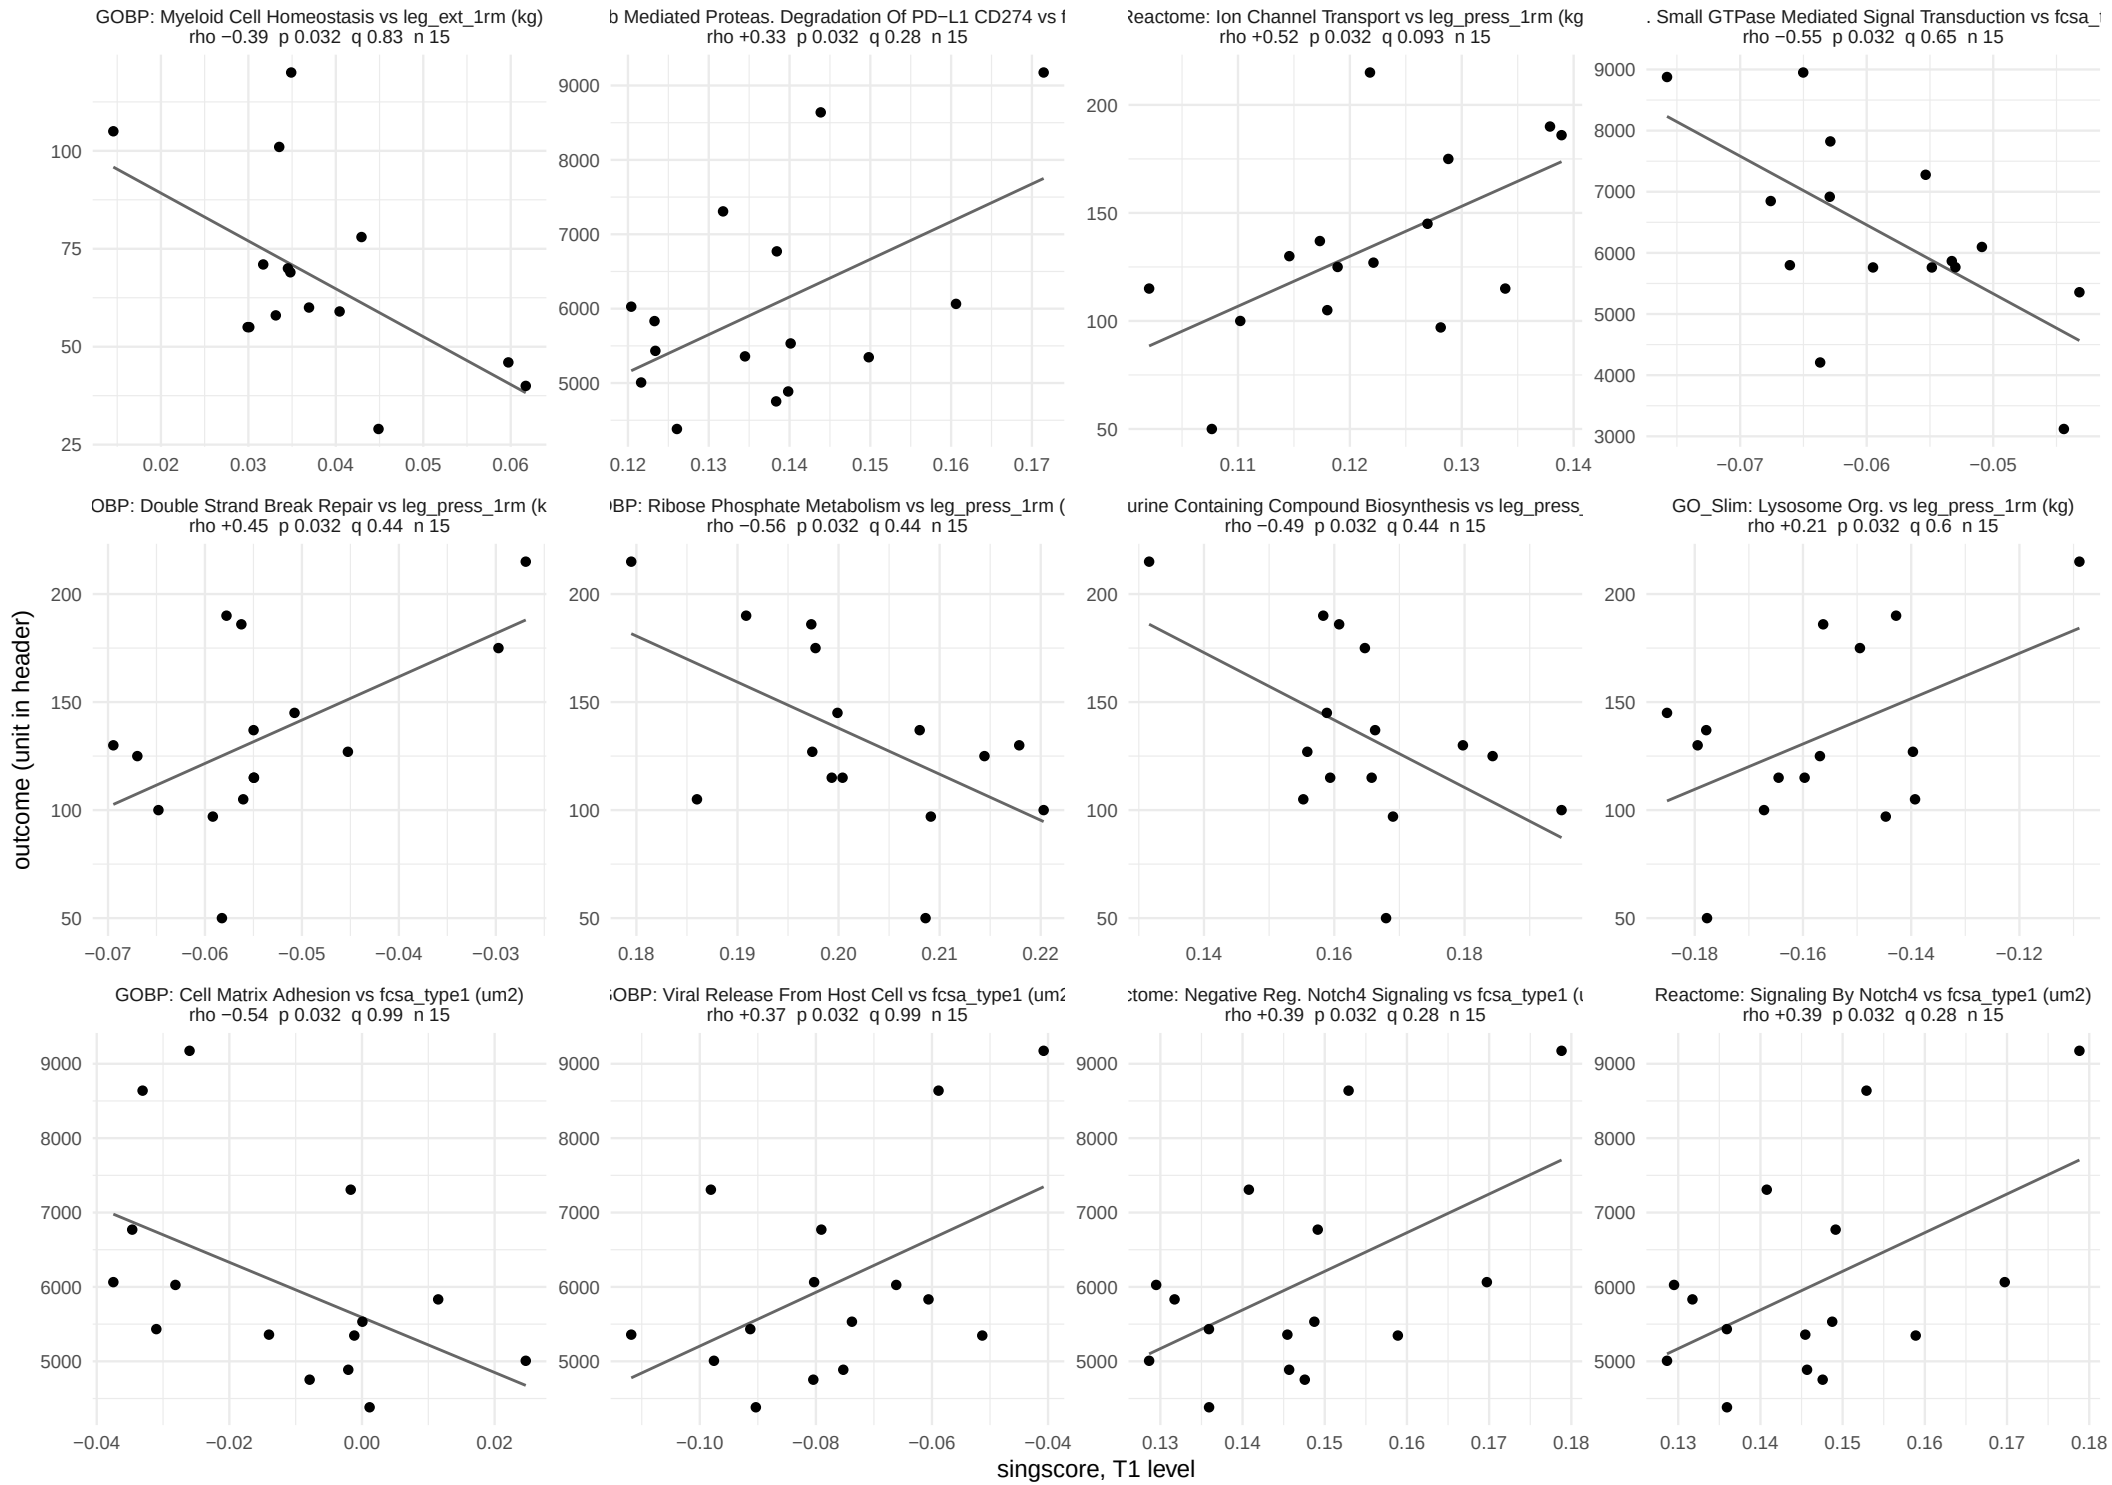

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, baseline_level window


673 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 41 of 57.

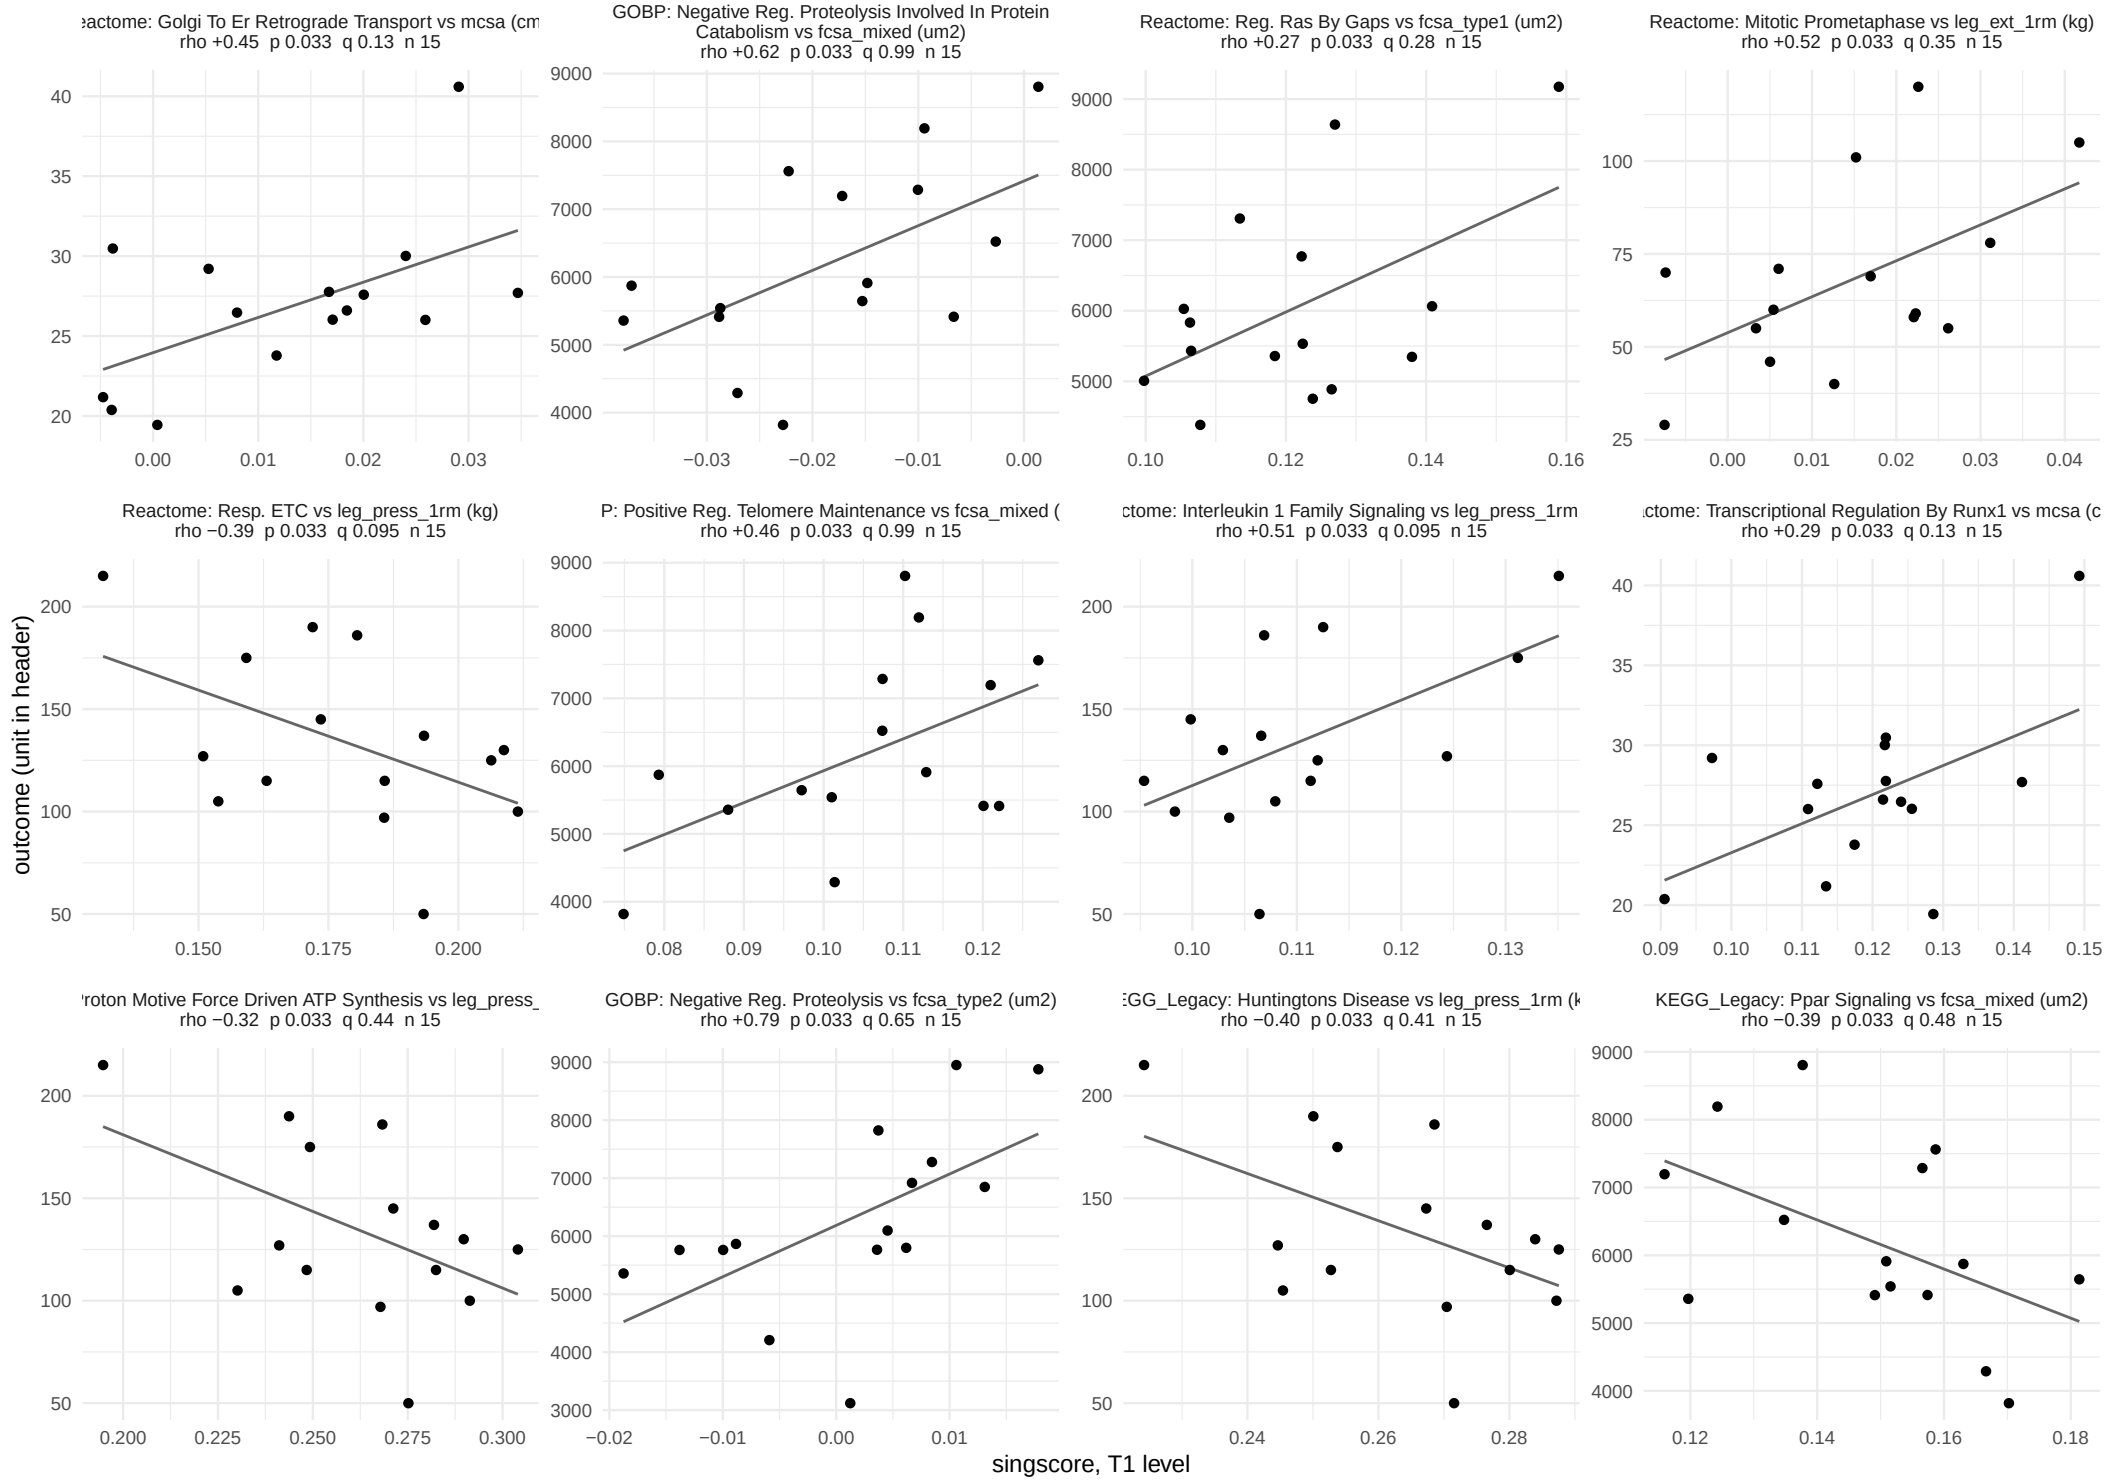

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, baseline_level window


673 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 42 of 57.

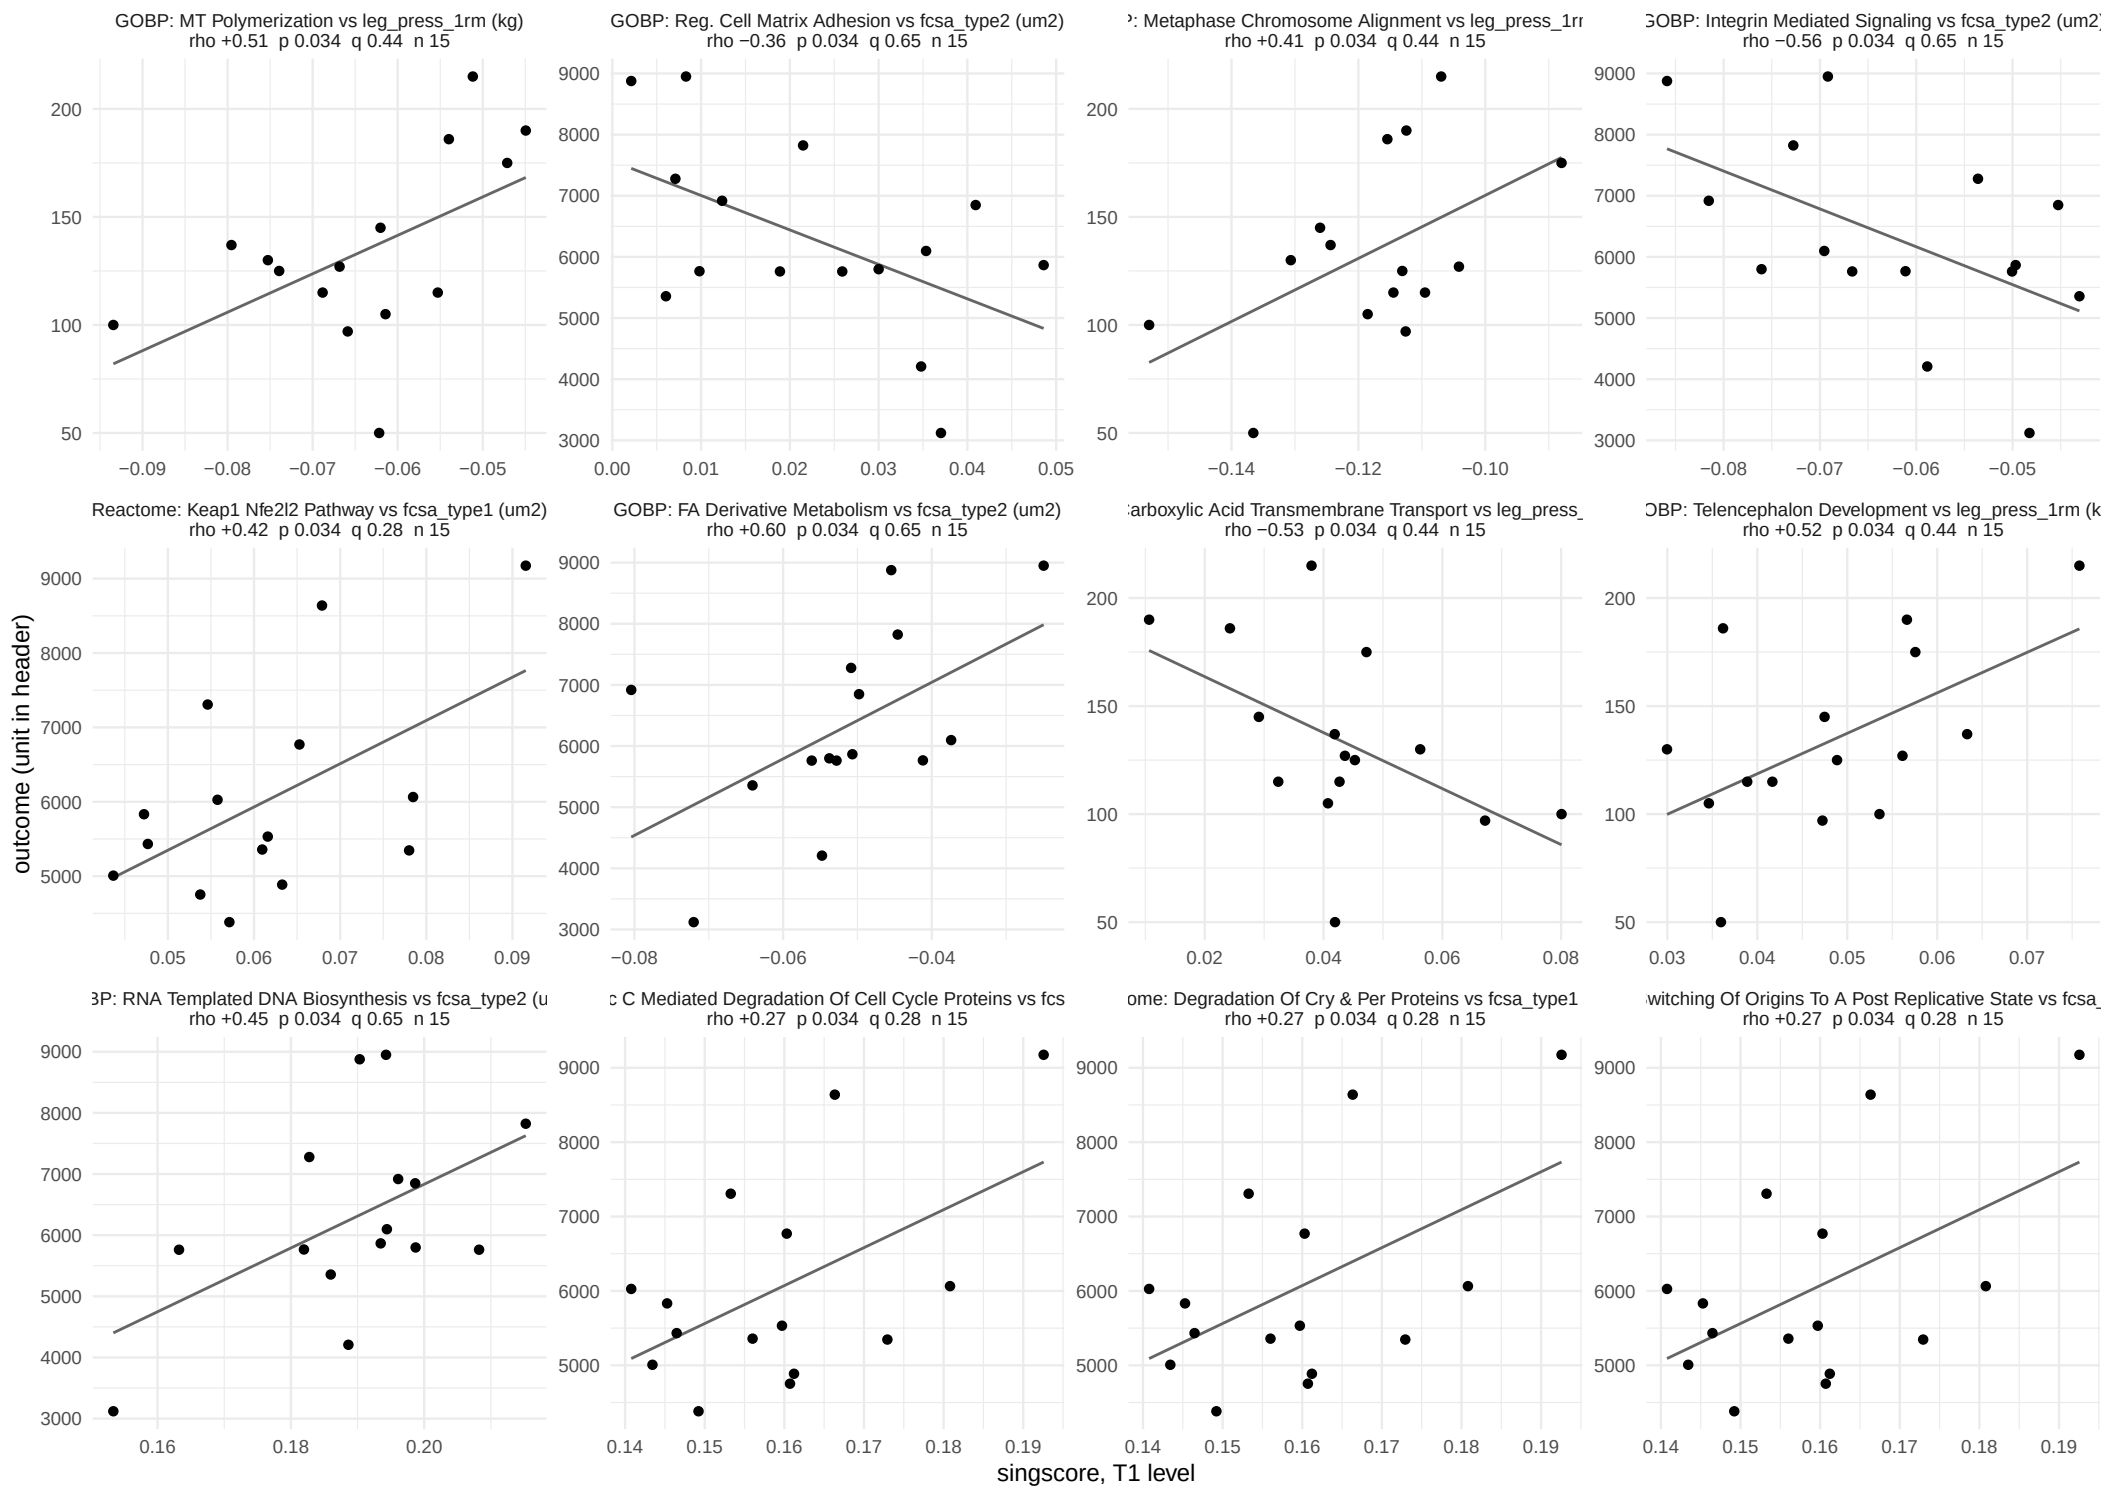

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, baseline_level window


673 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 43 of 57.

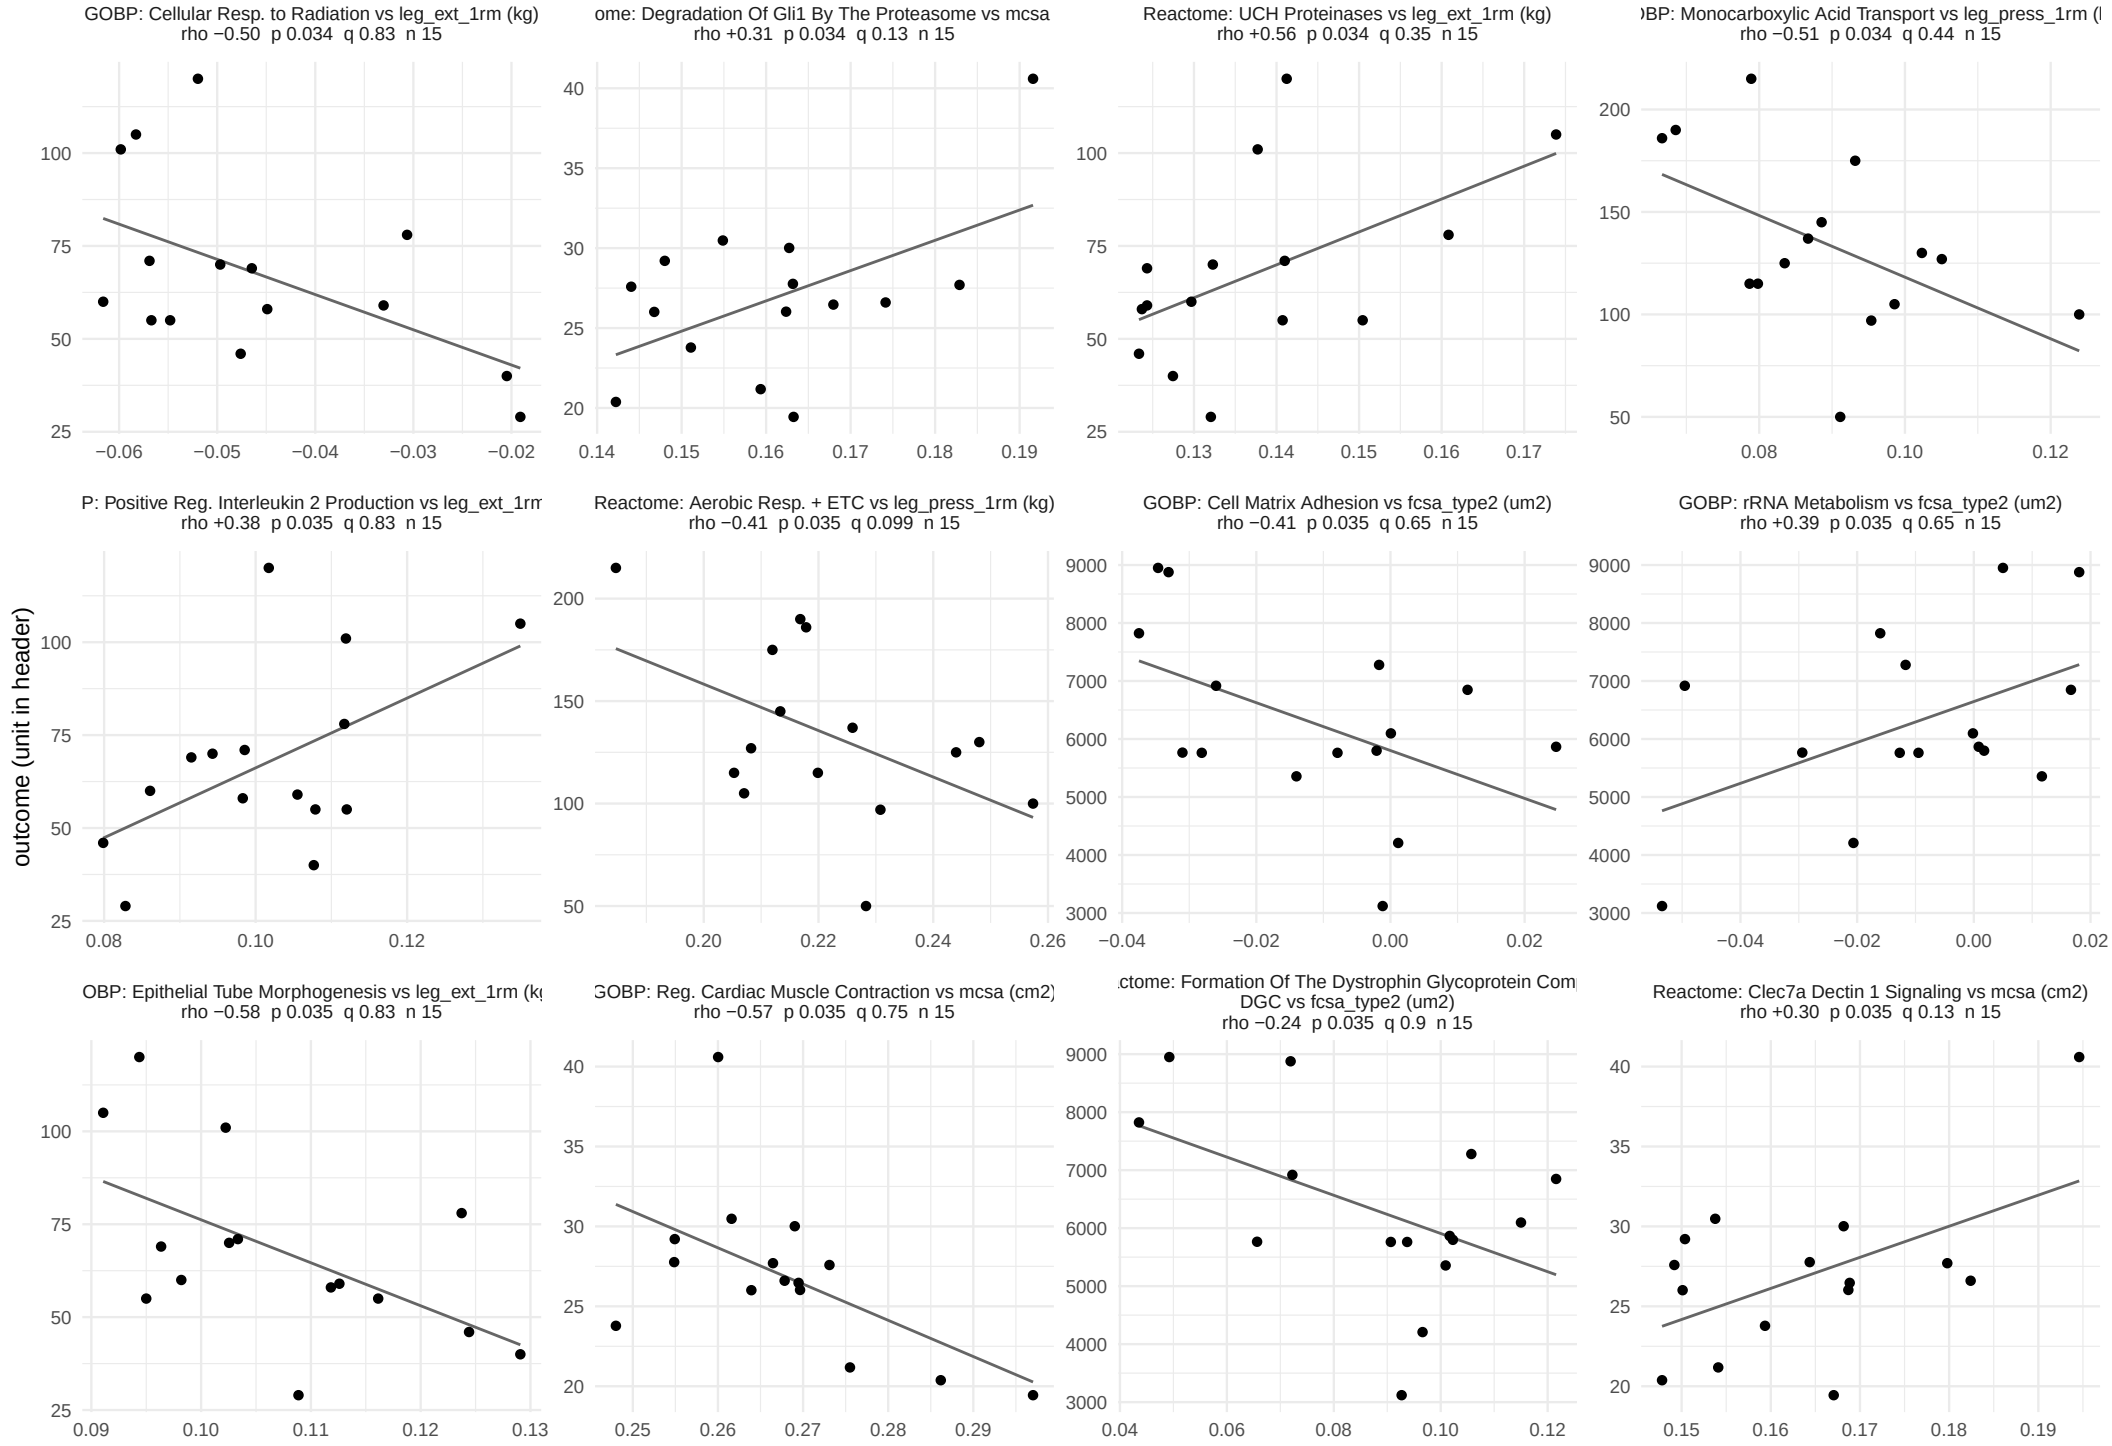

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, baseline_level window


673 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 44 of 57.

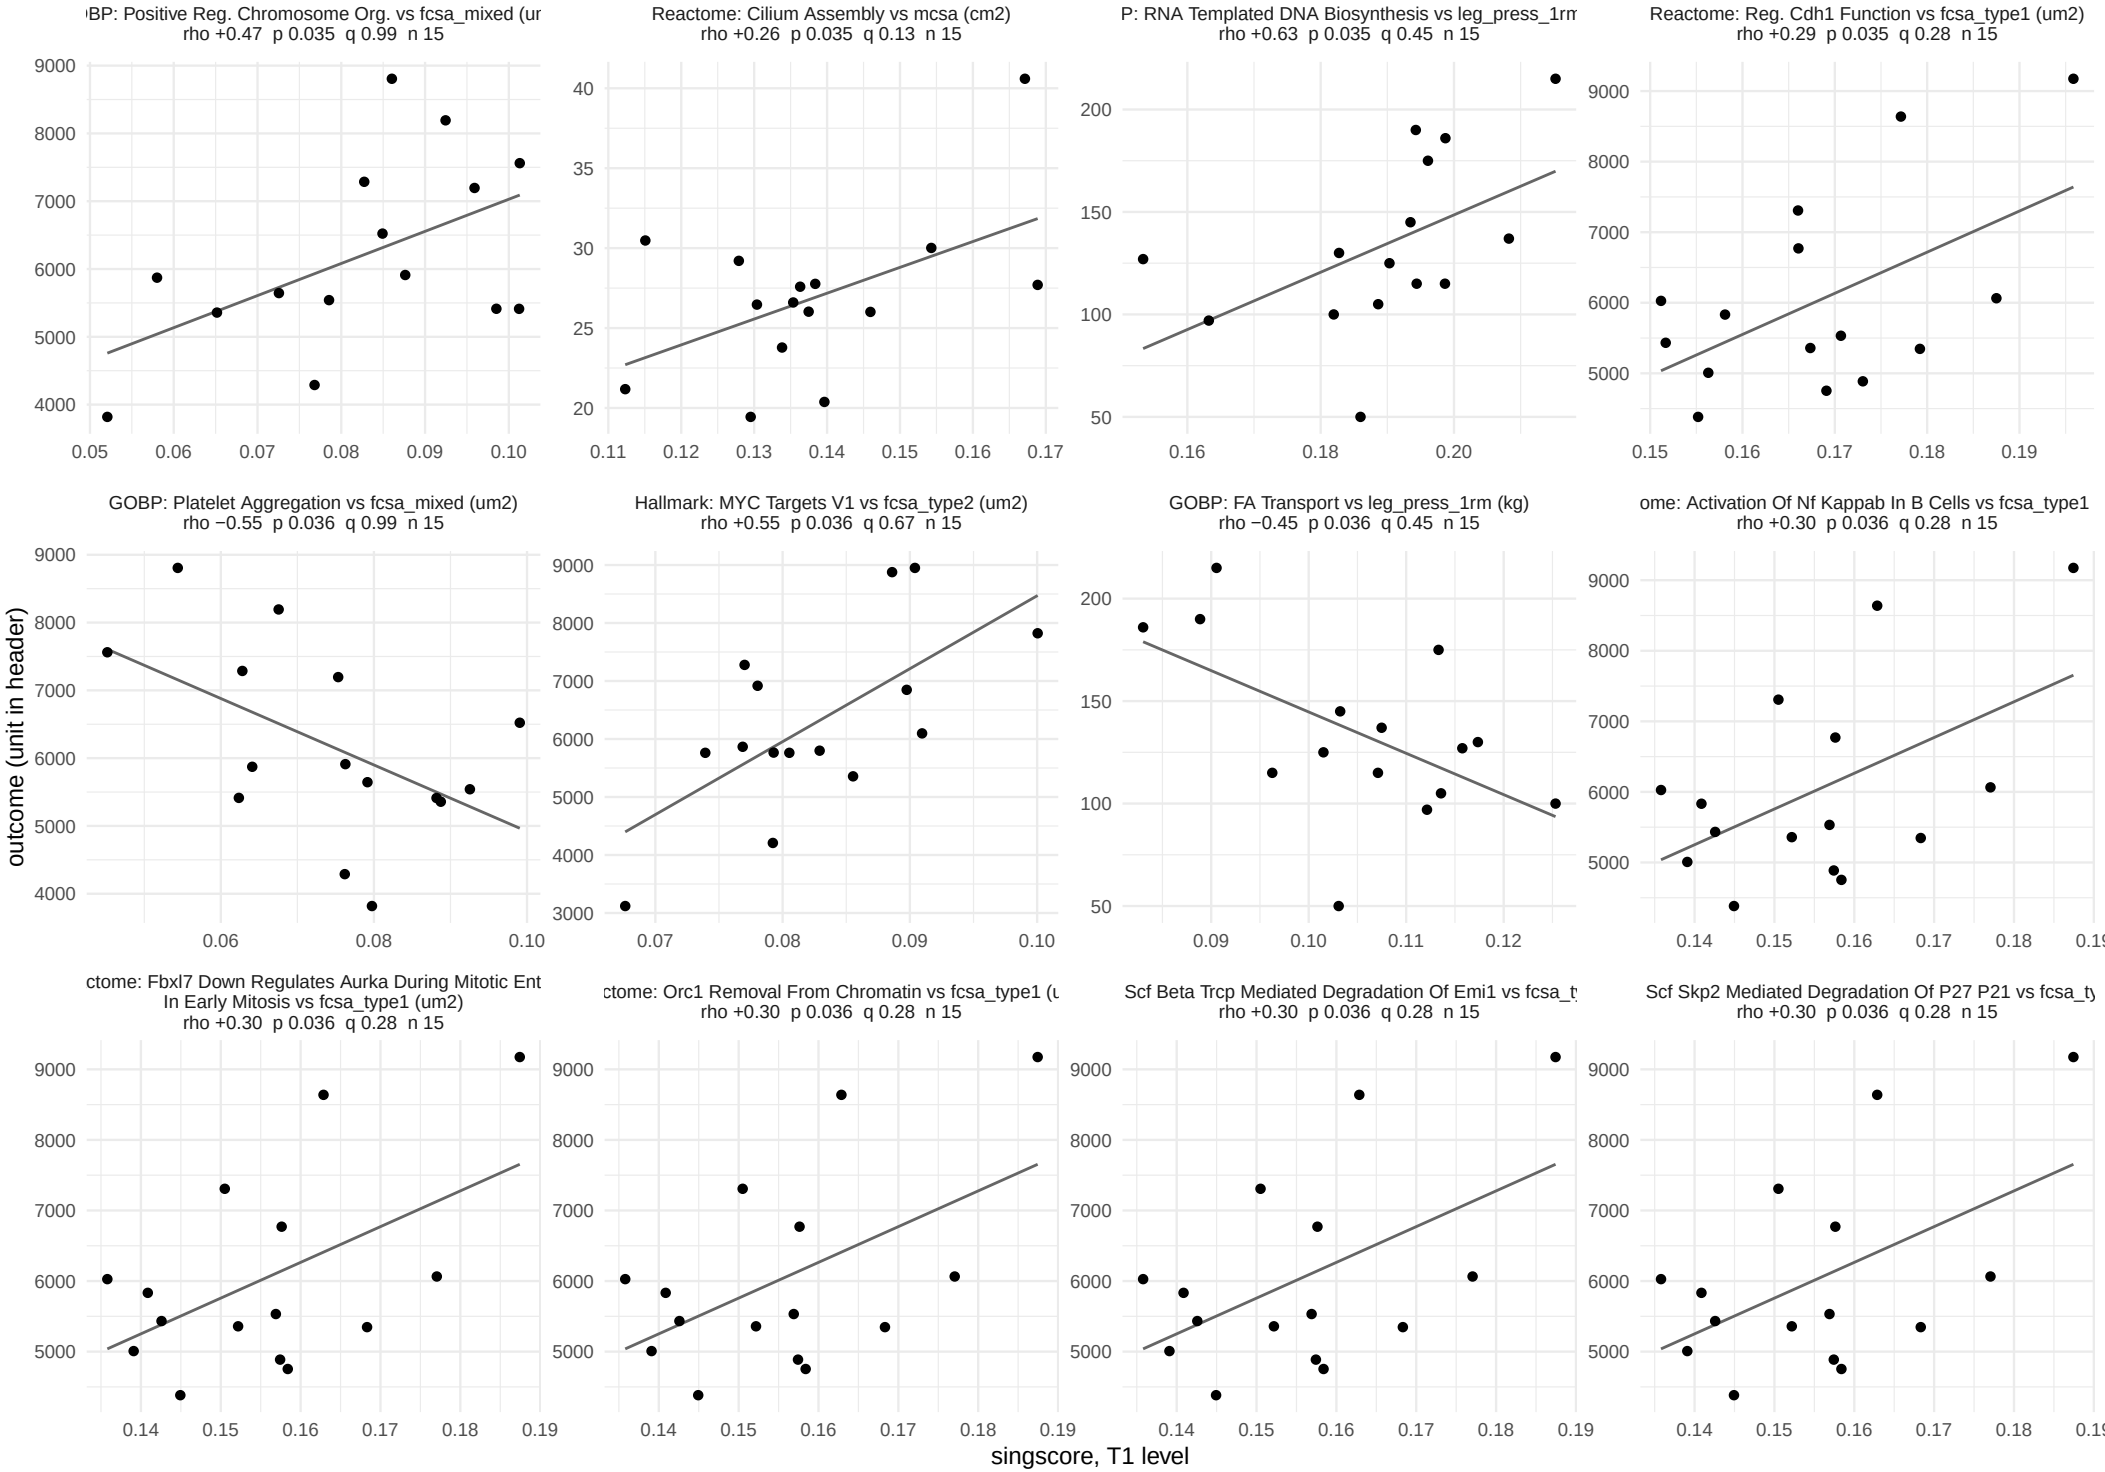

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, baseline_level window


673 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 45 of 57.

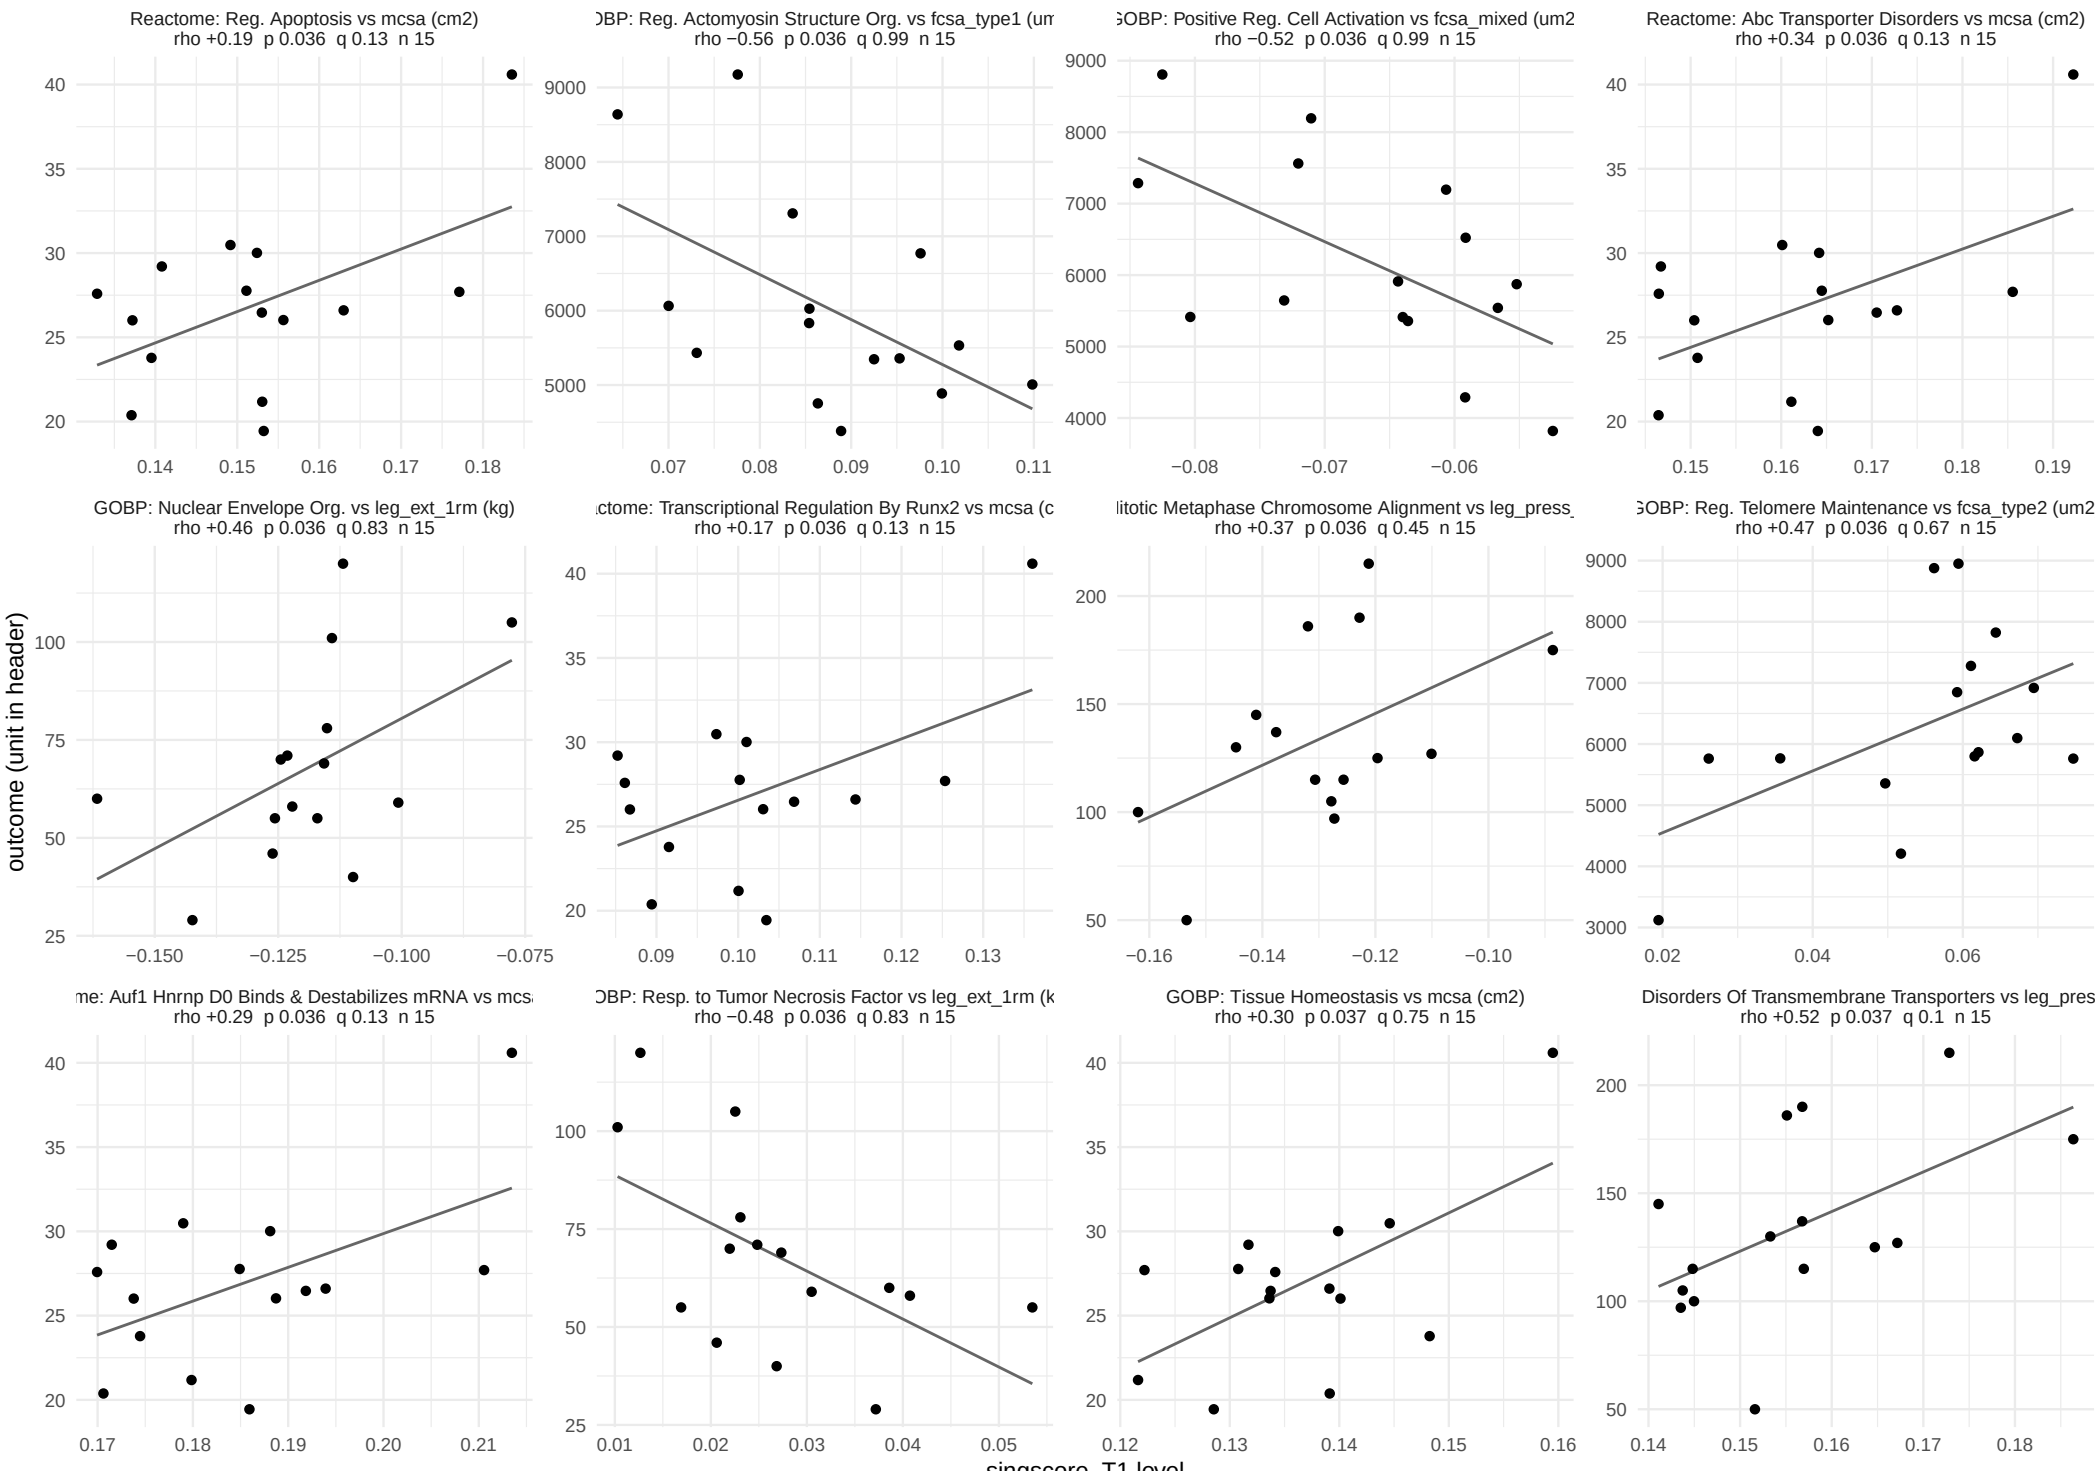

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, baseline_level window


673 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 46 of 57.

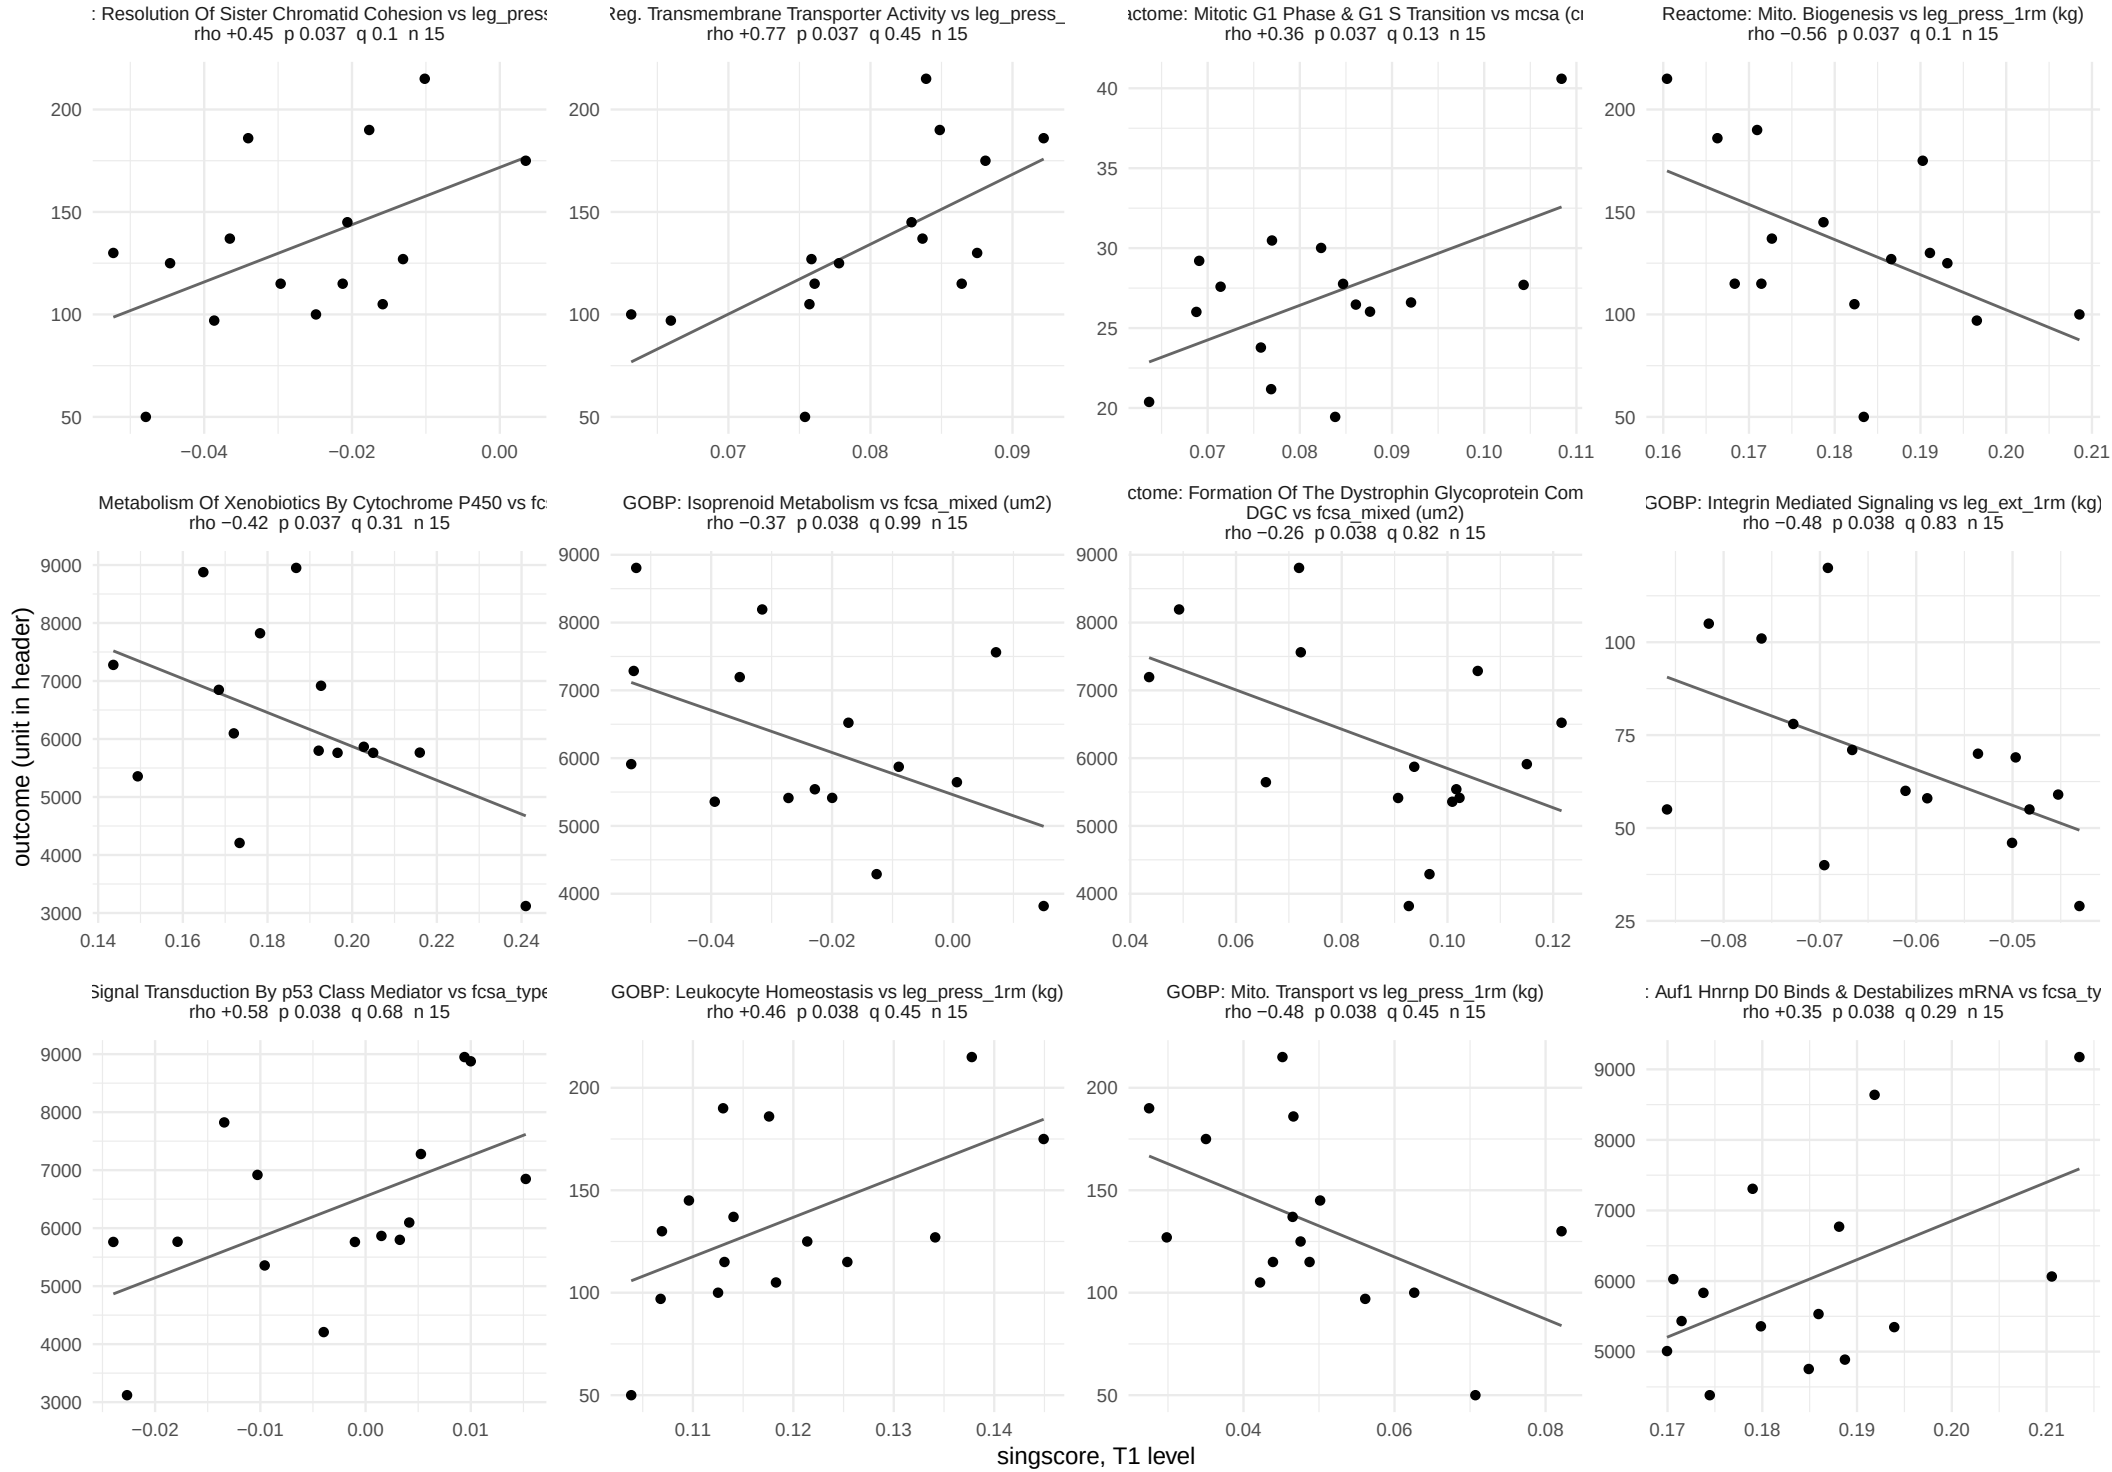

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, baseline_level window


673 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 47 of 57.

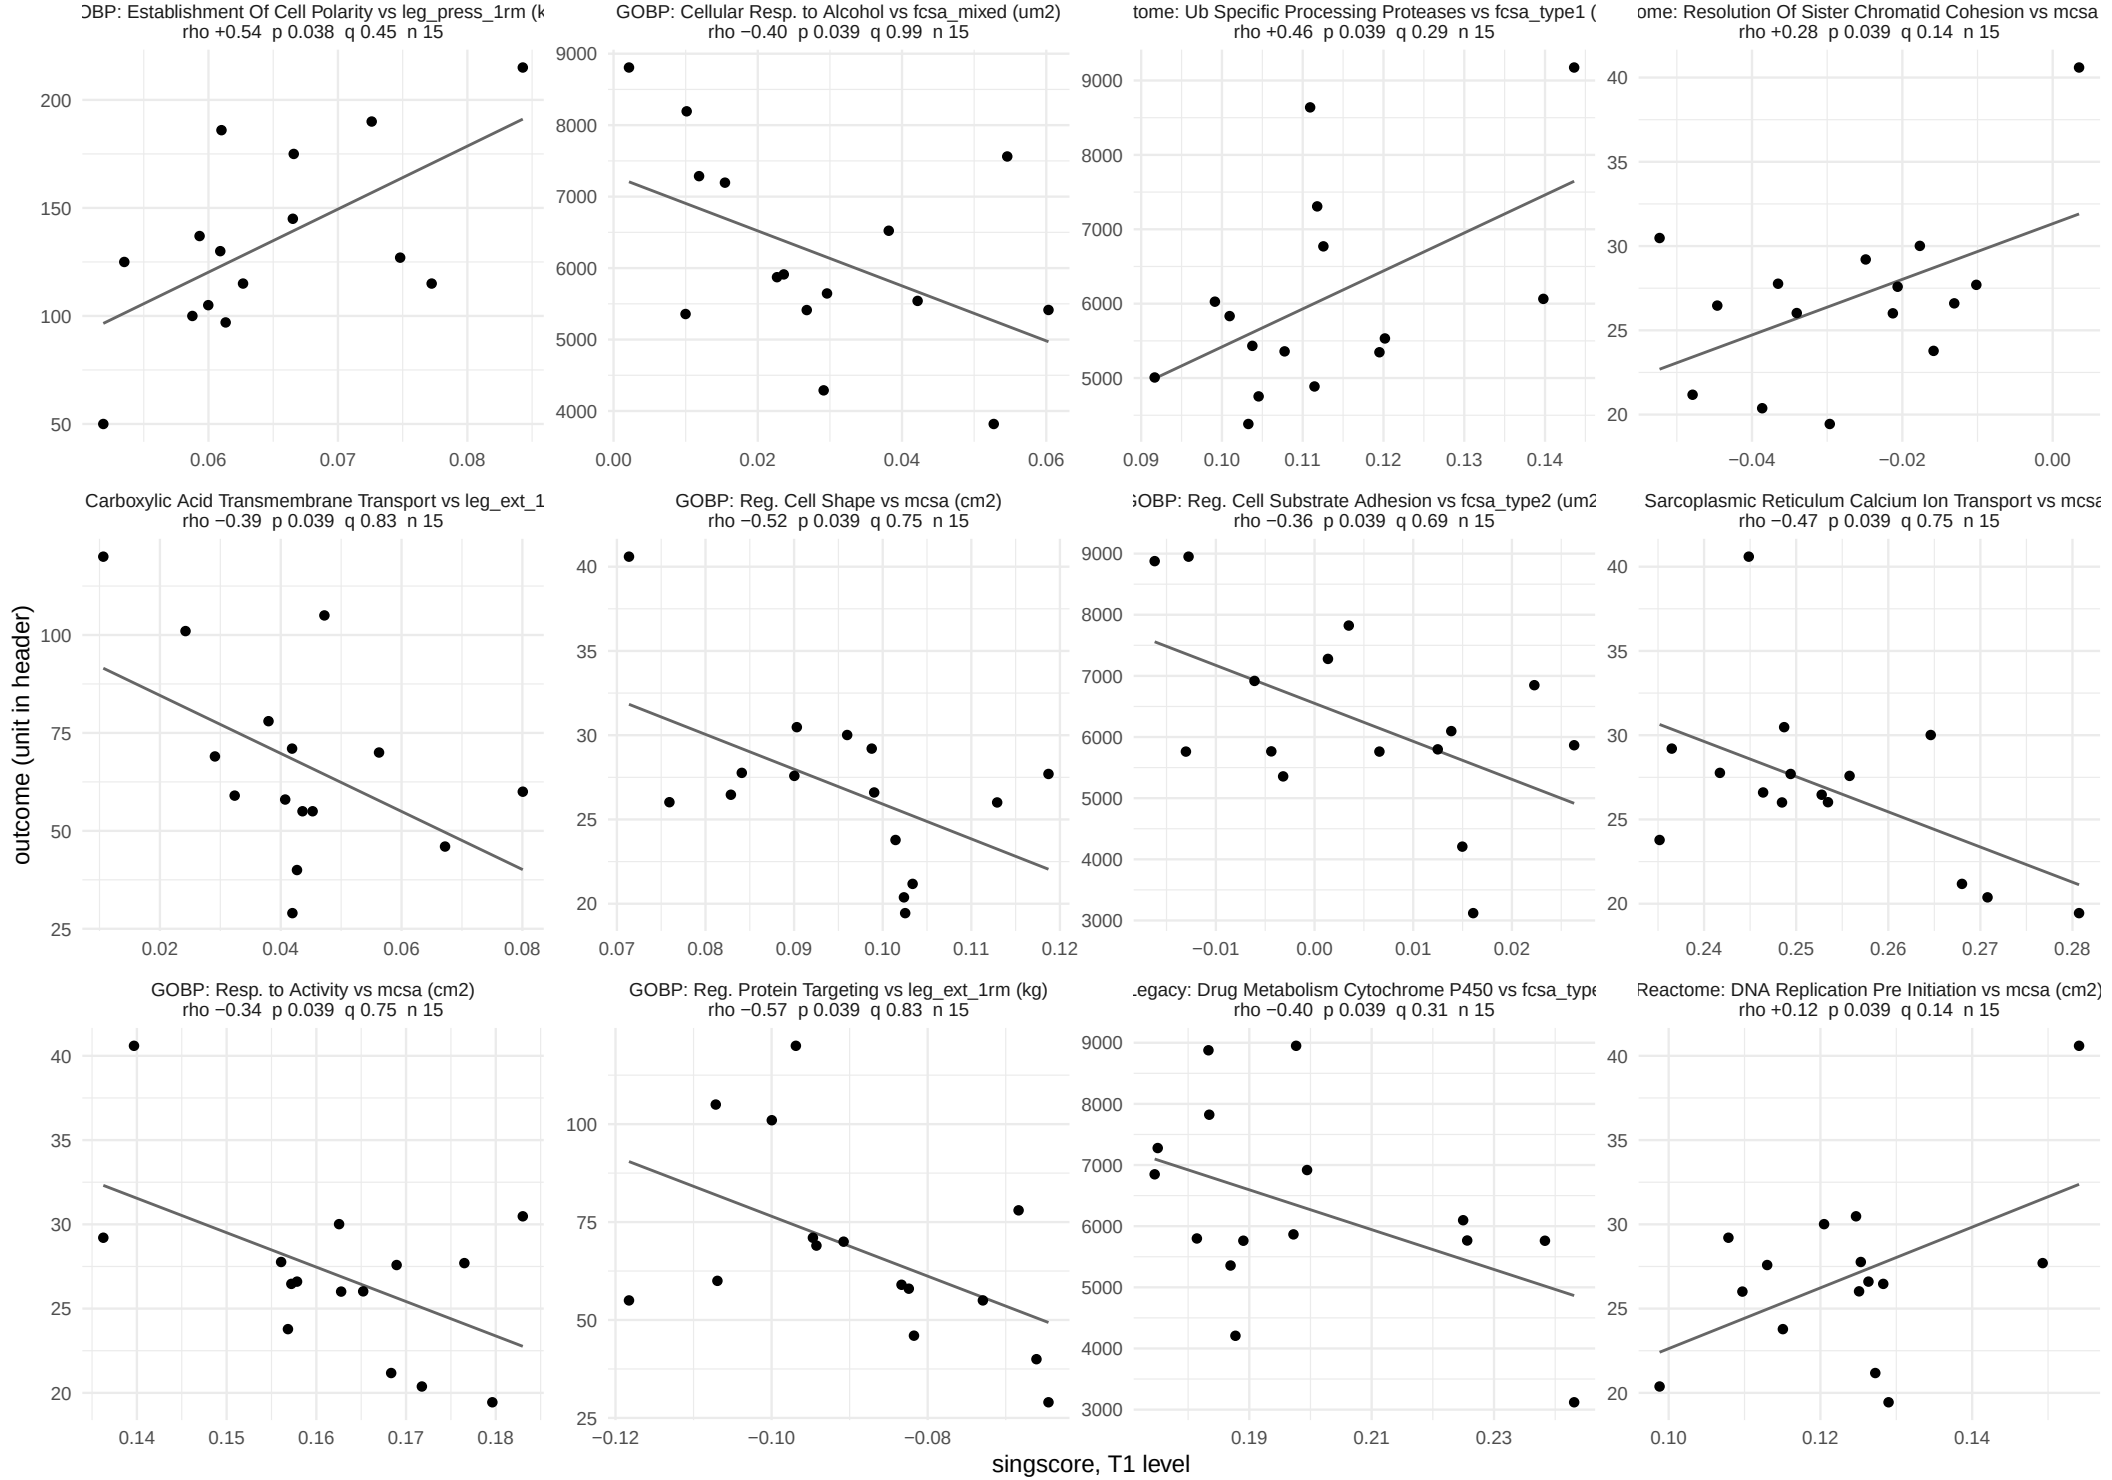

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, baseline_level window


673 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 48 of 57.

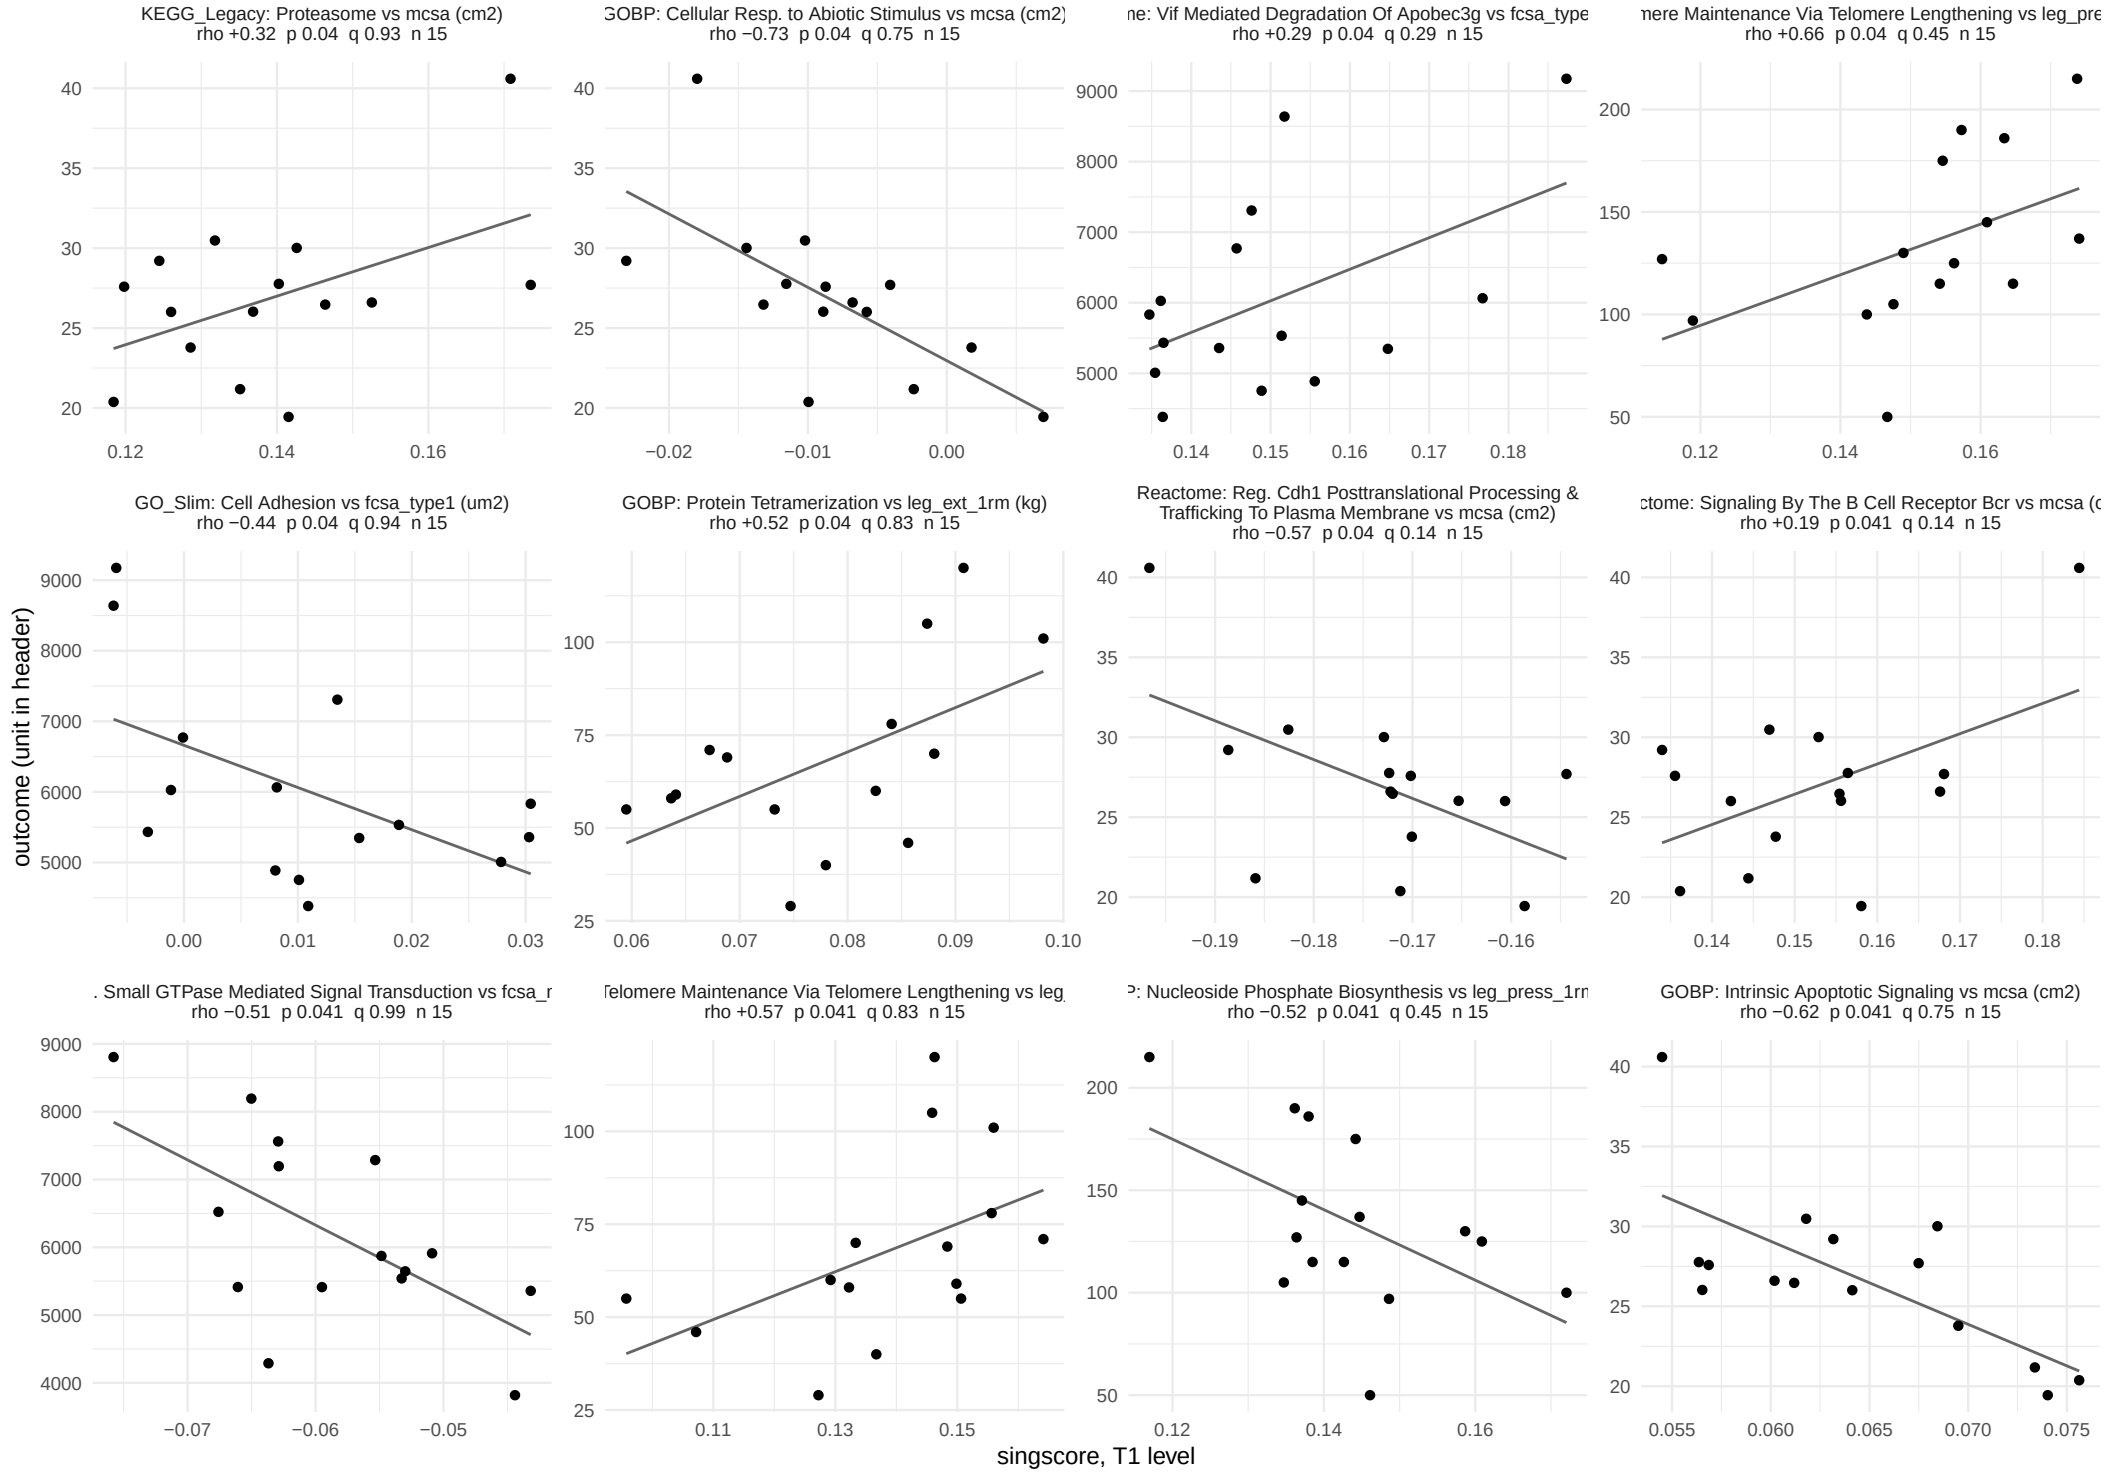

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, baseline_level window


673 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 49 of 57.

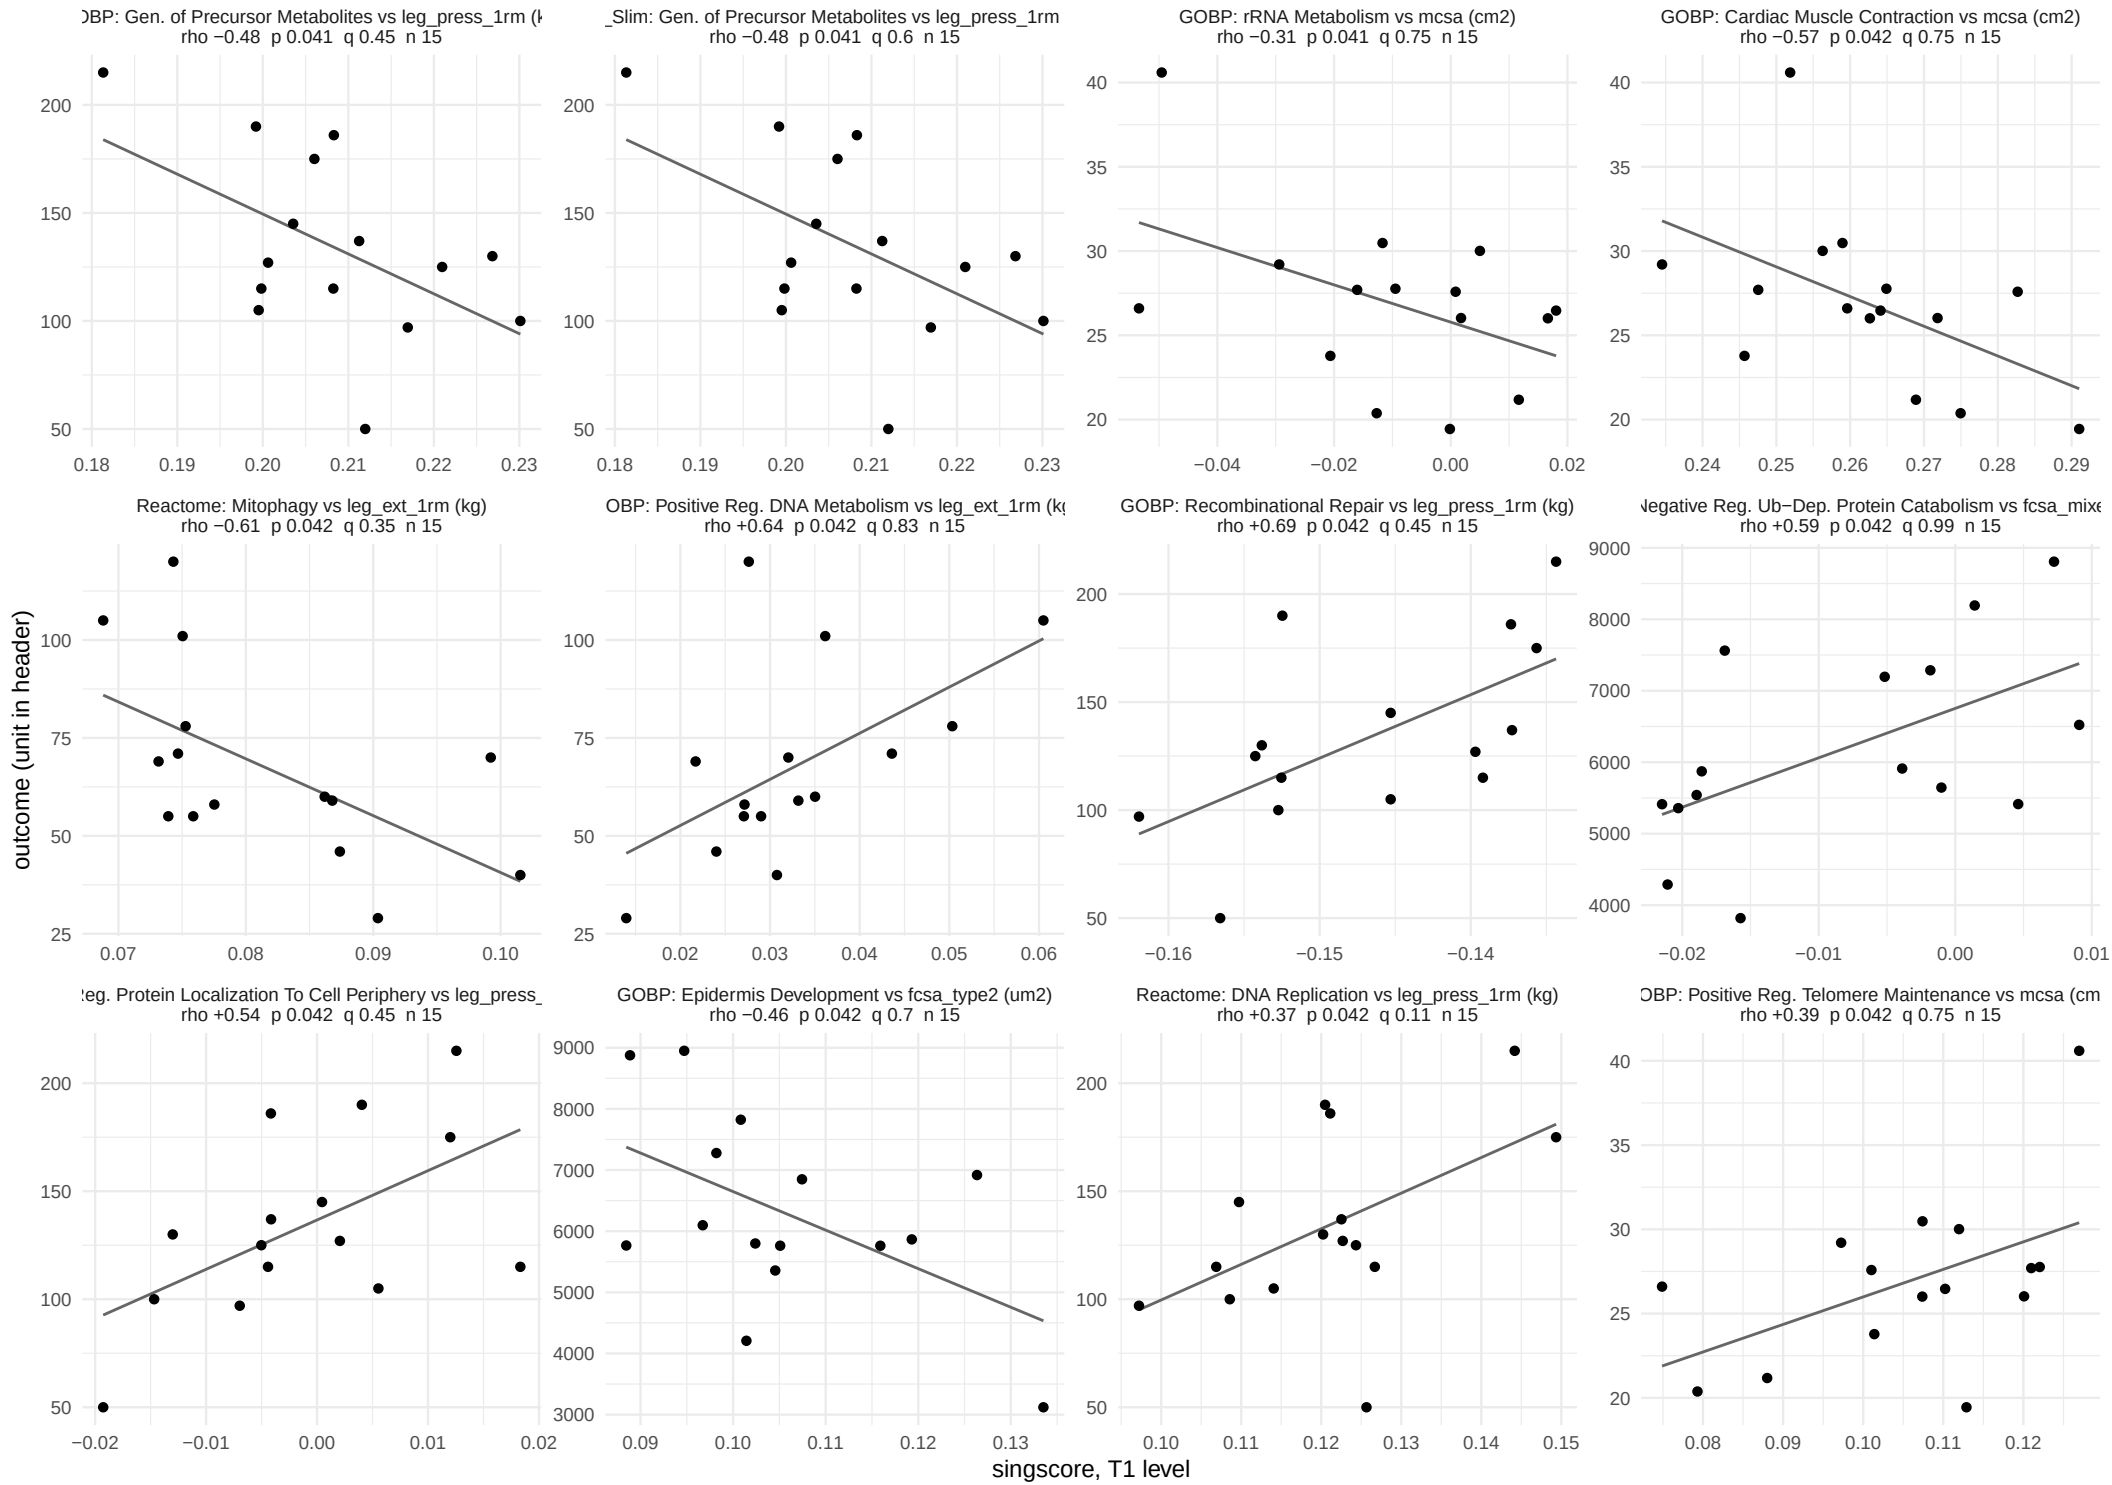

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, baseline_level window


673 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 50 of 57.

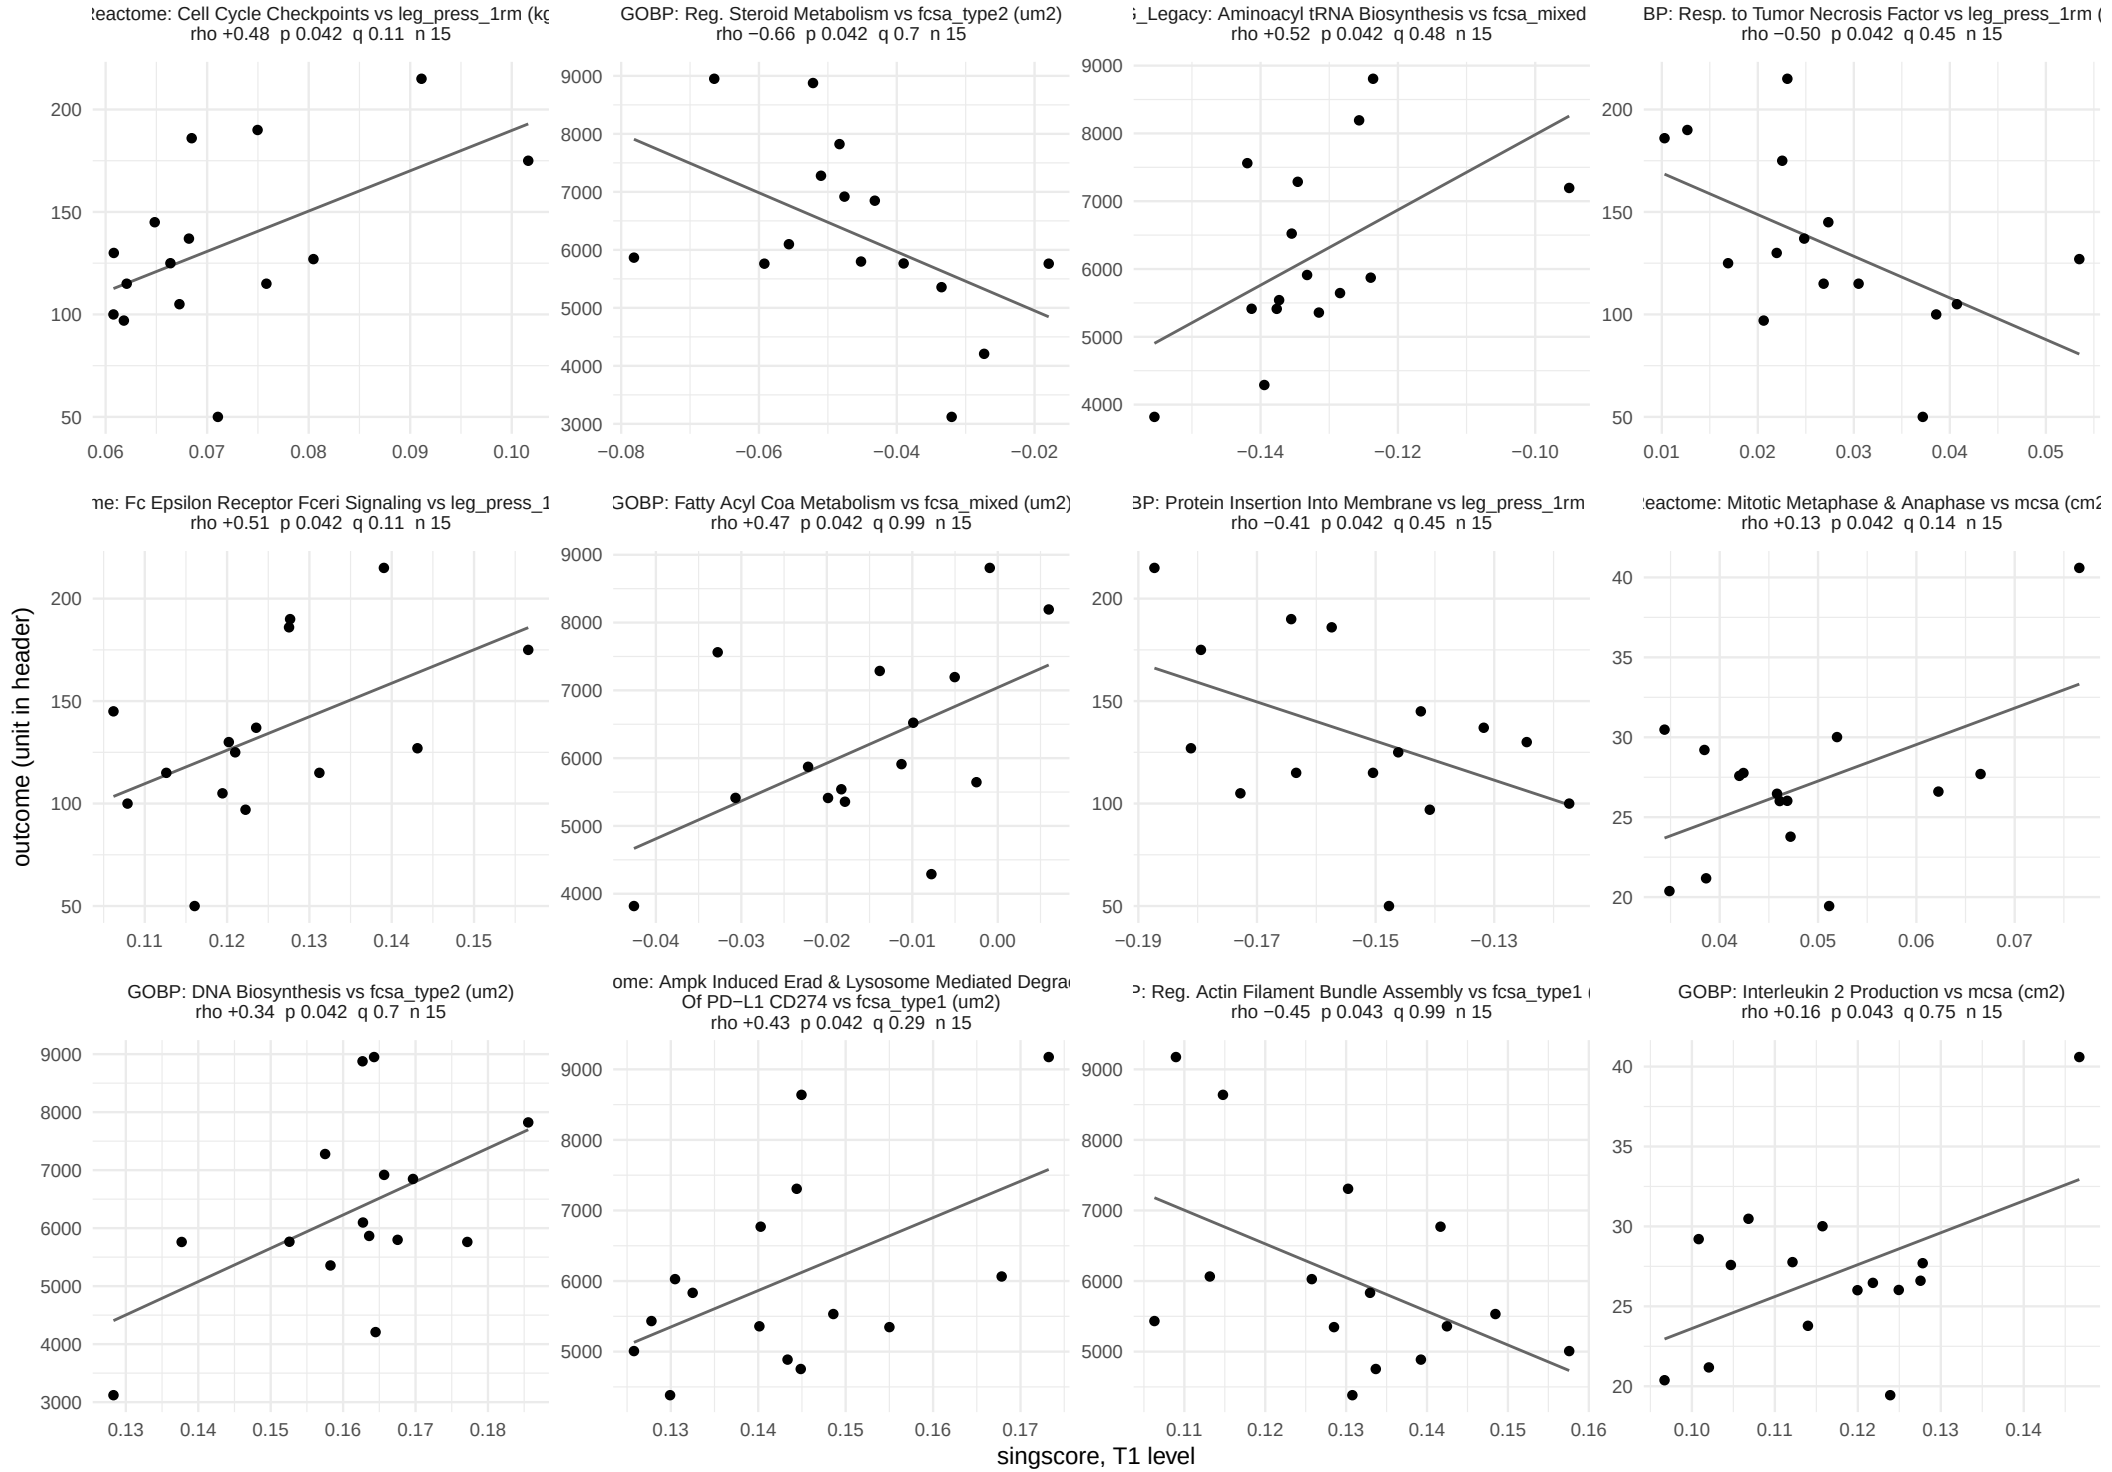

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, baseline_level window


673 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 51 of 57.

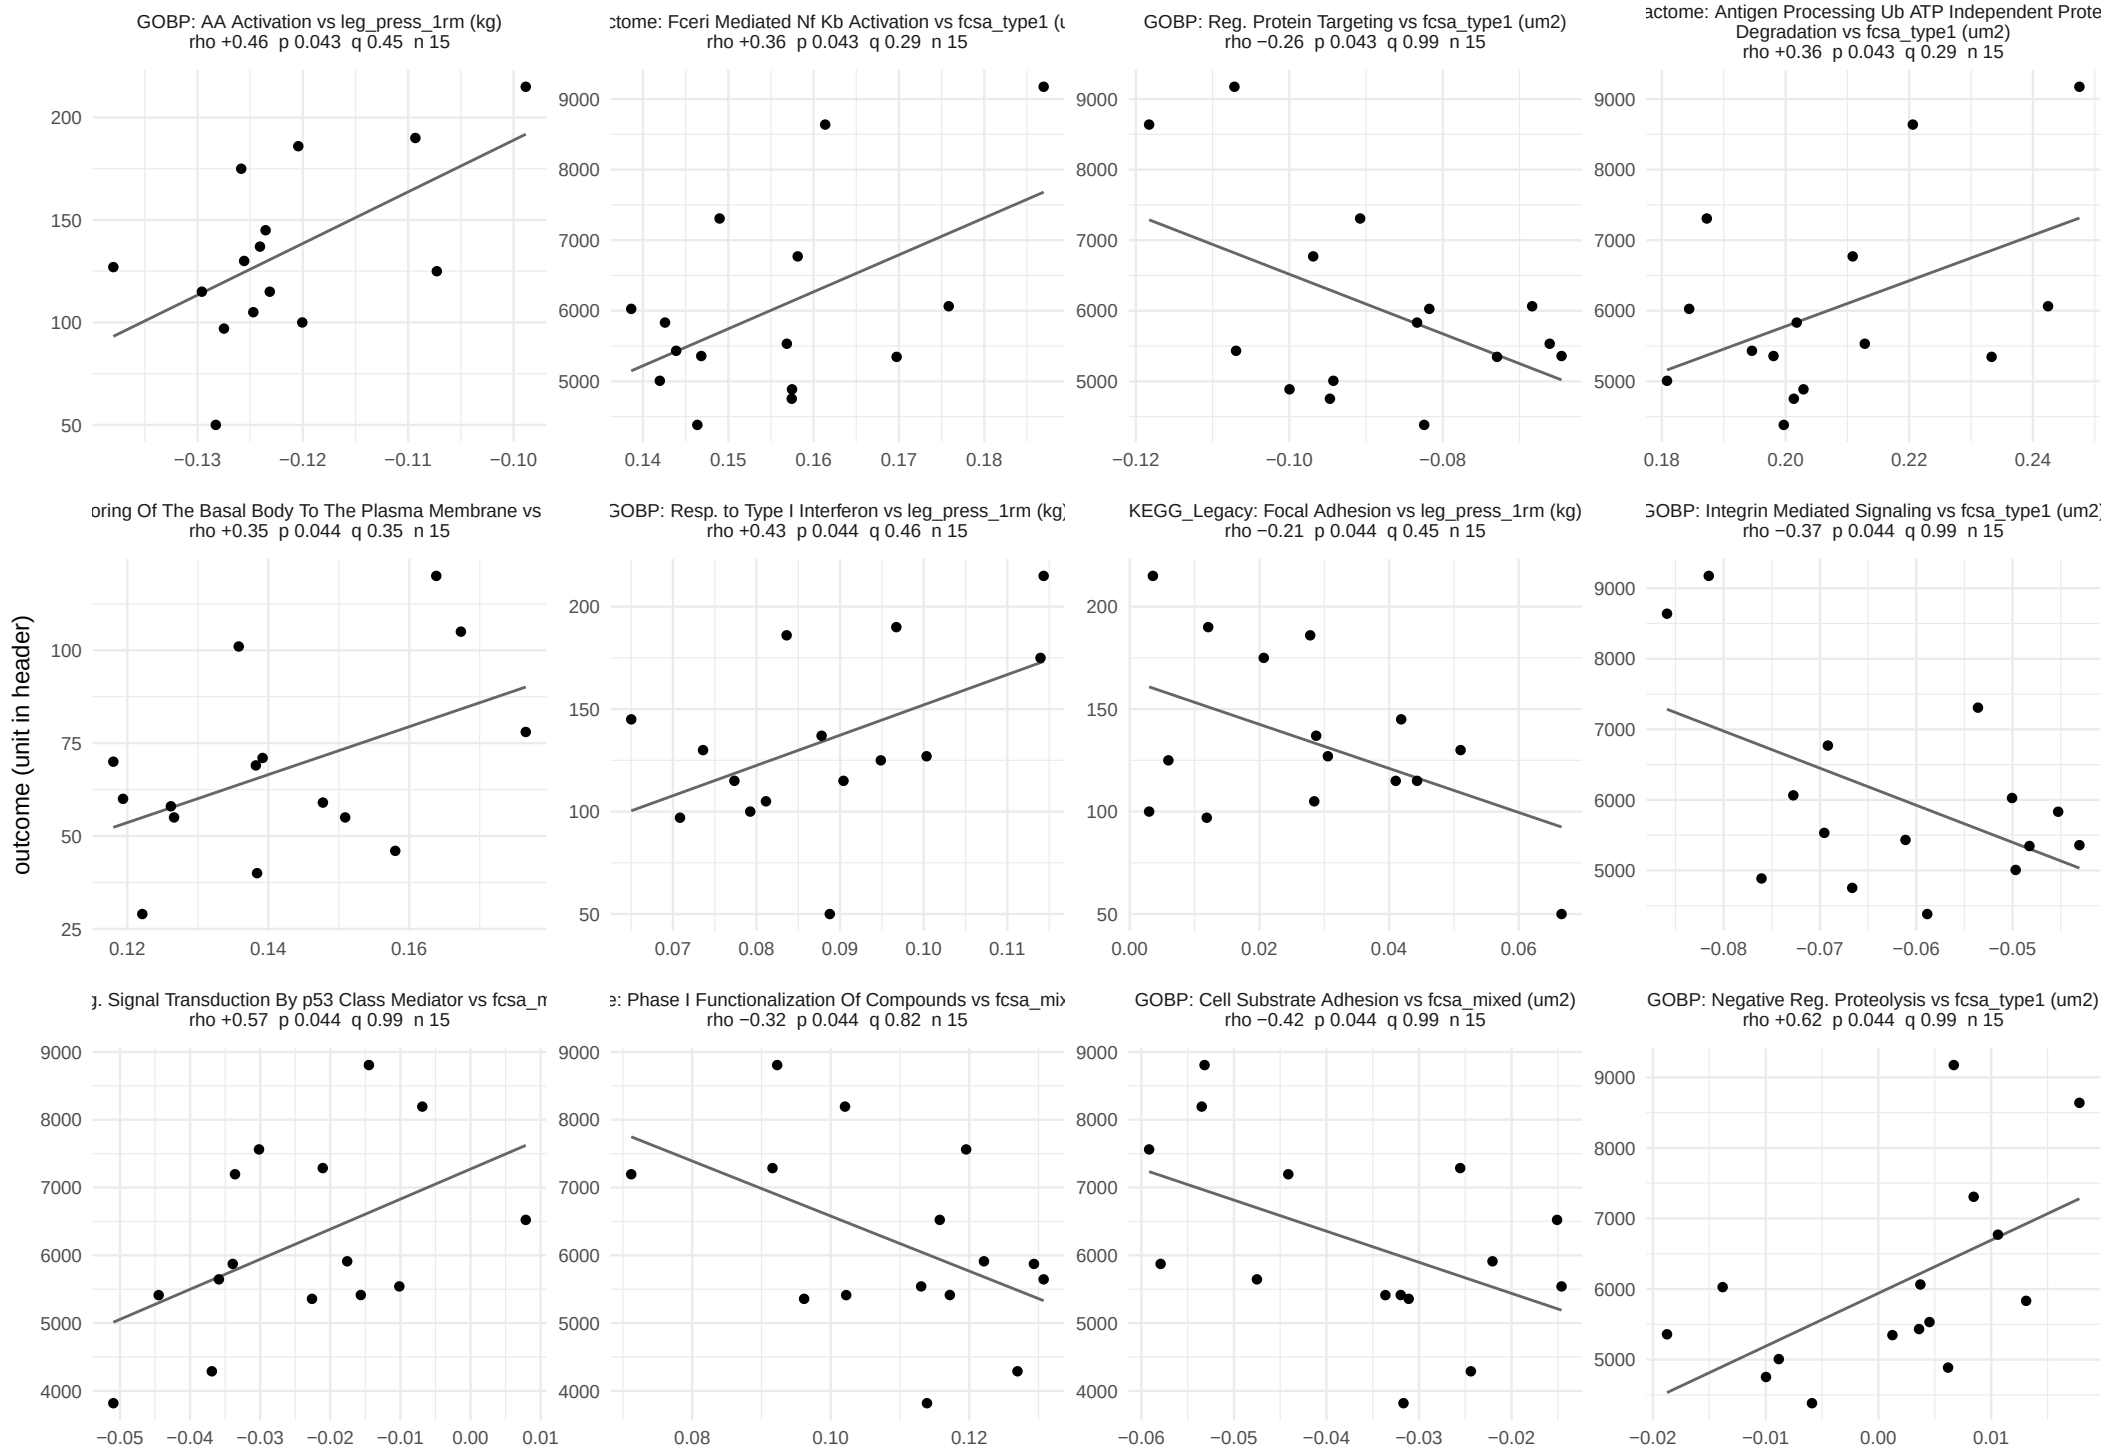

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, baseline_level window


673 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 52 of 57.

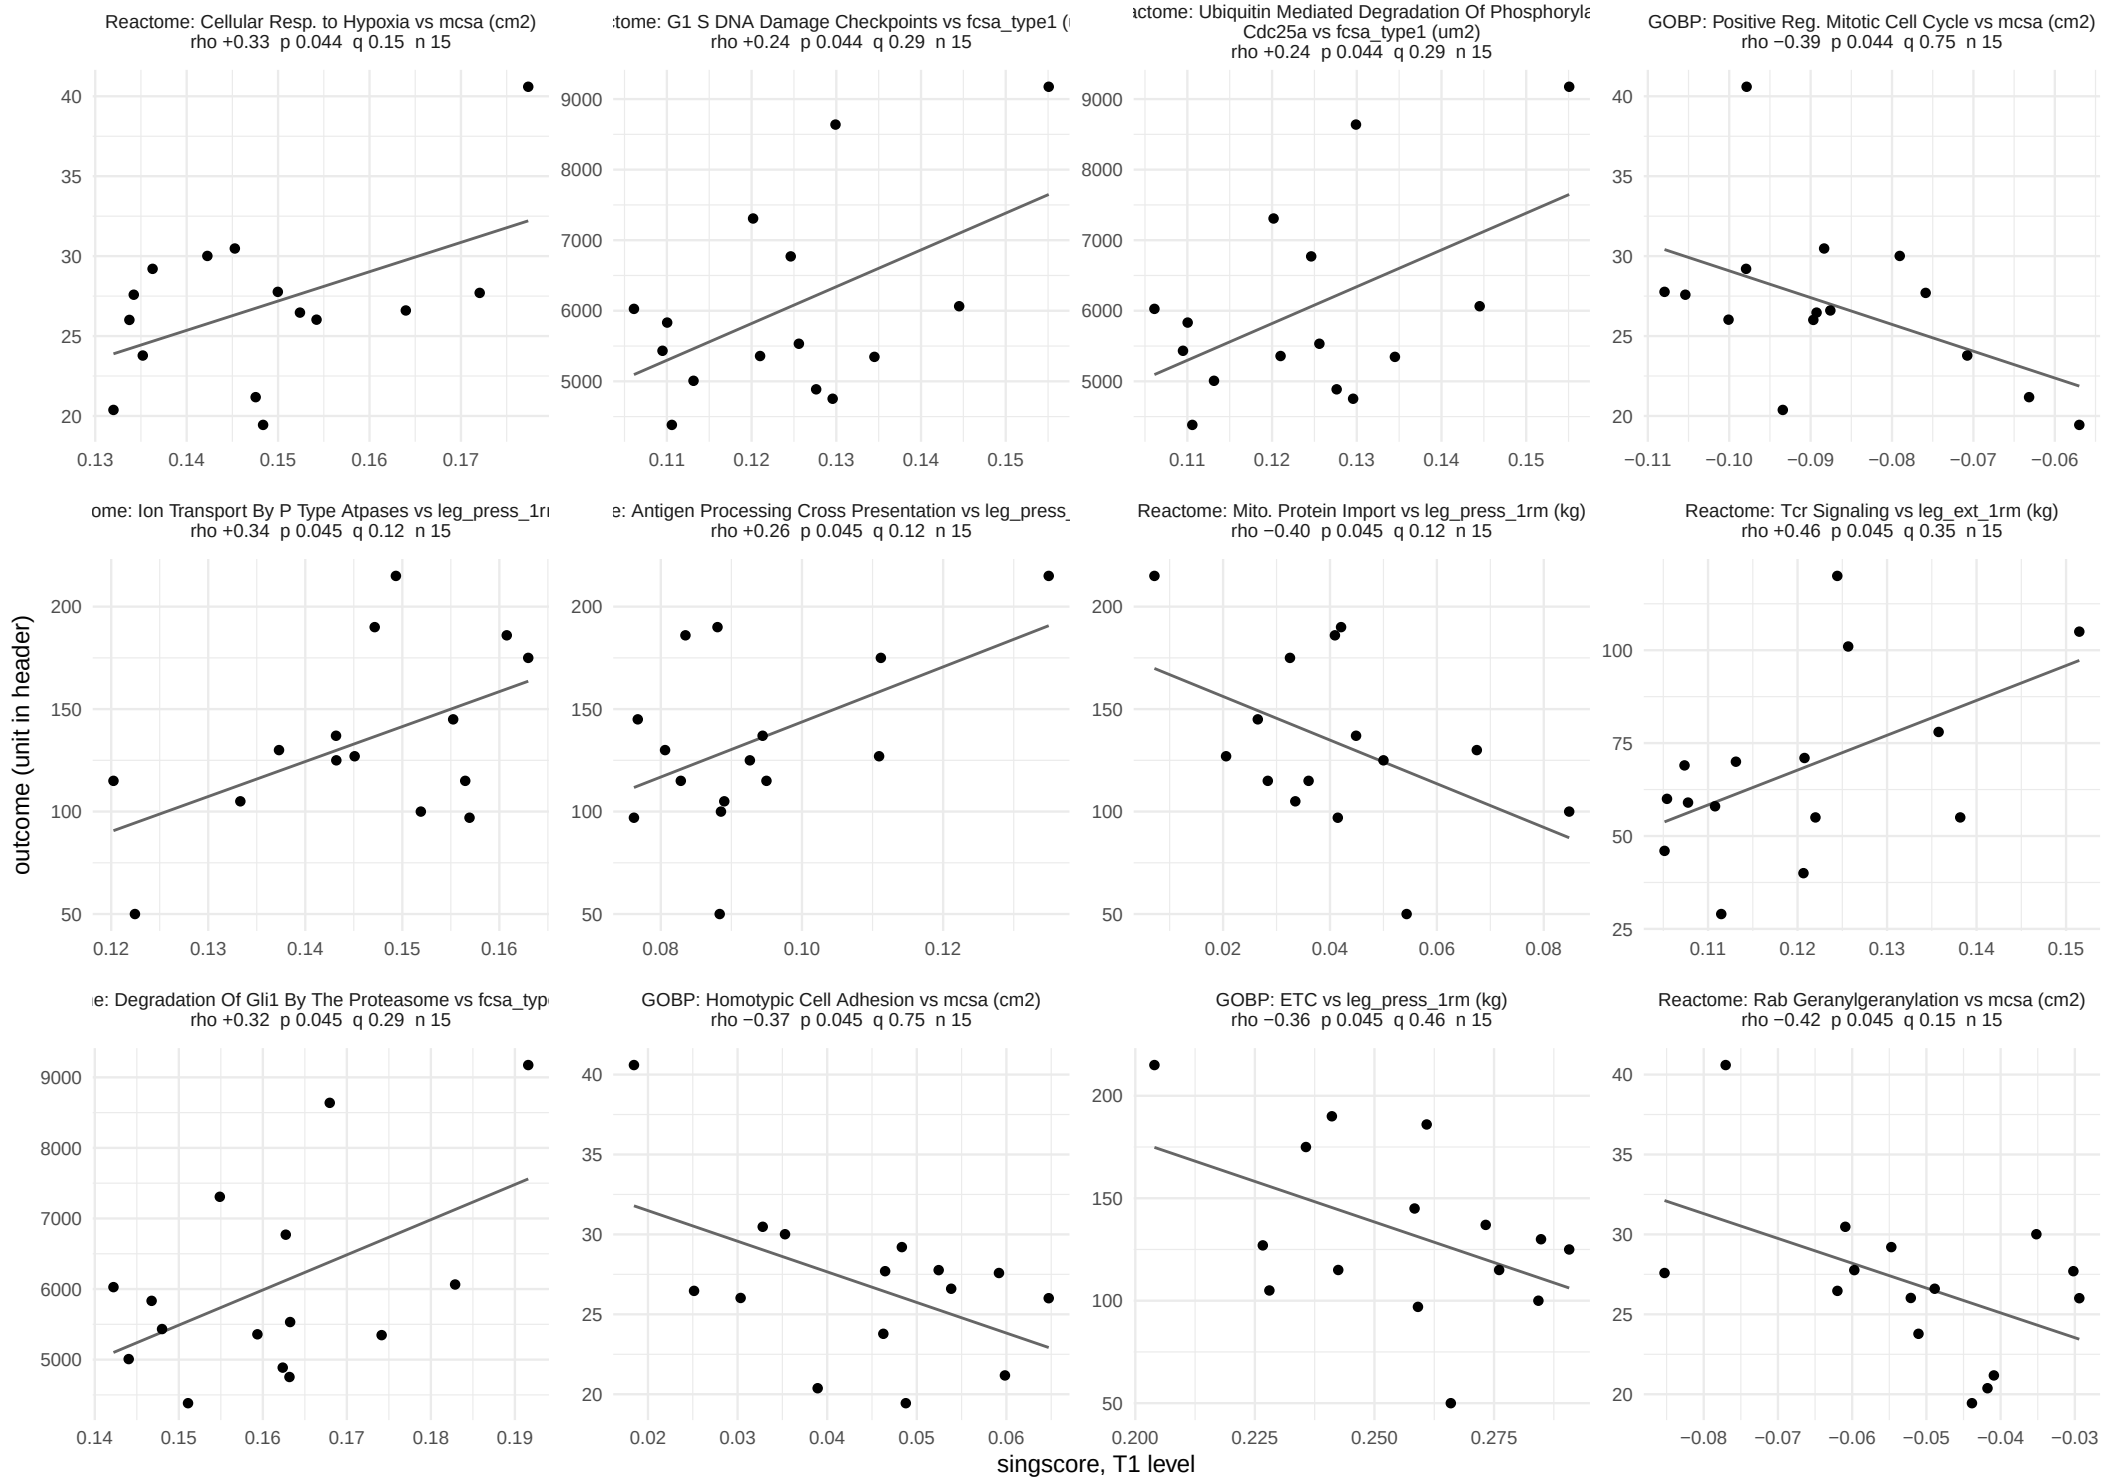

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, baseline_level window


673 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 53 of 57.

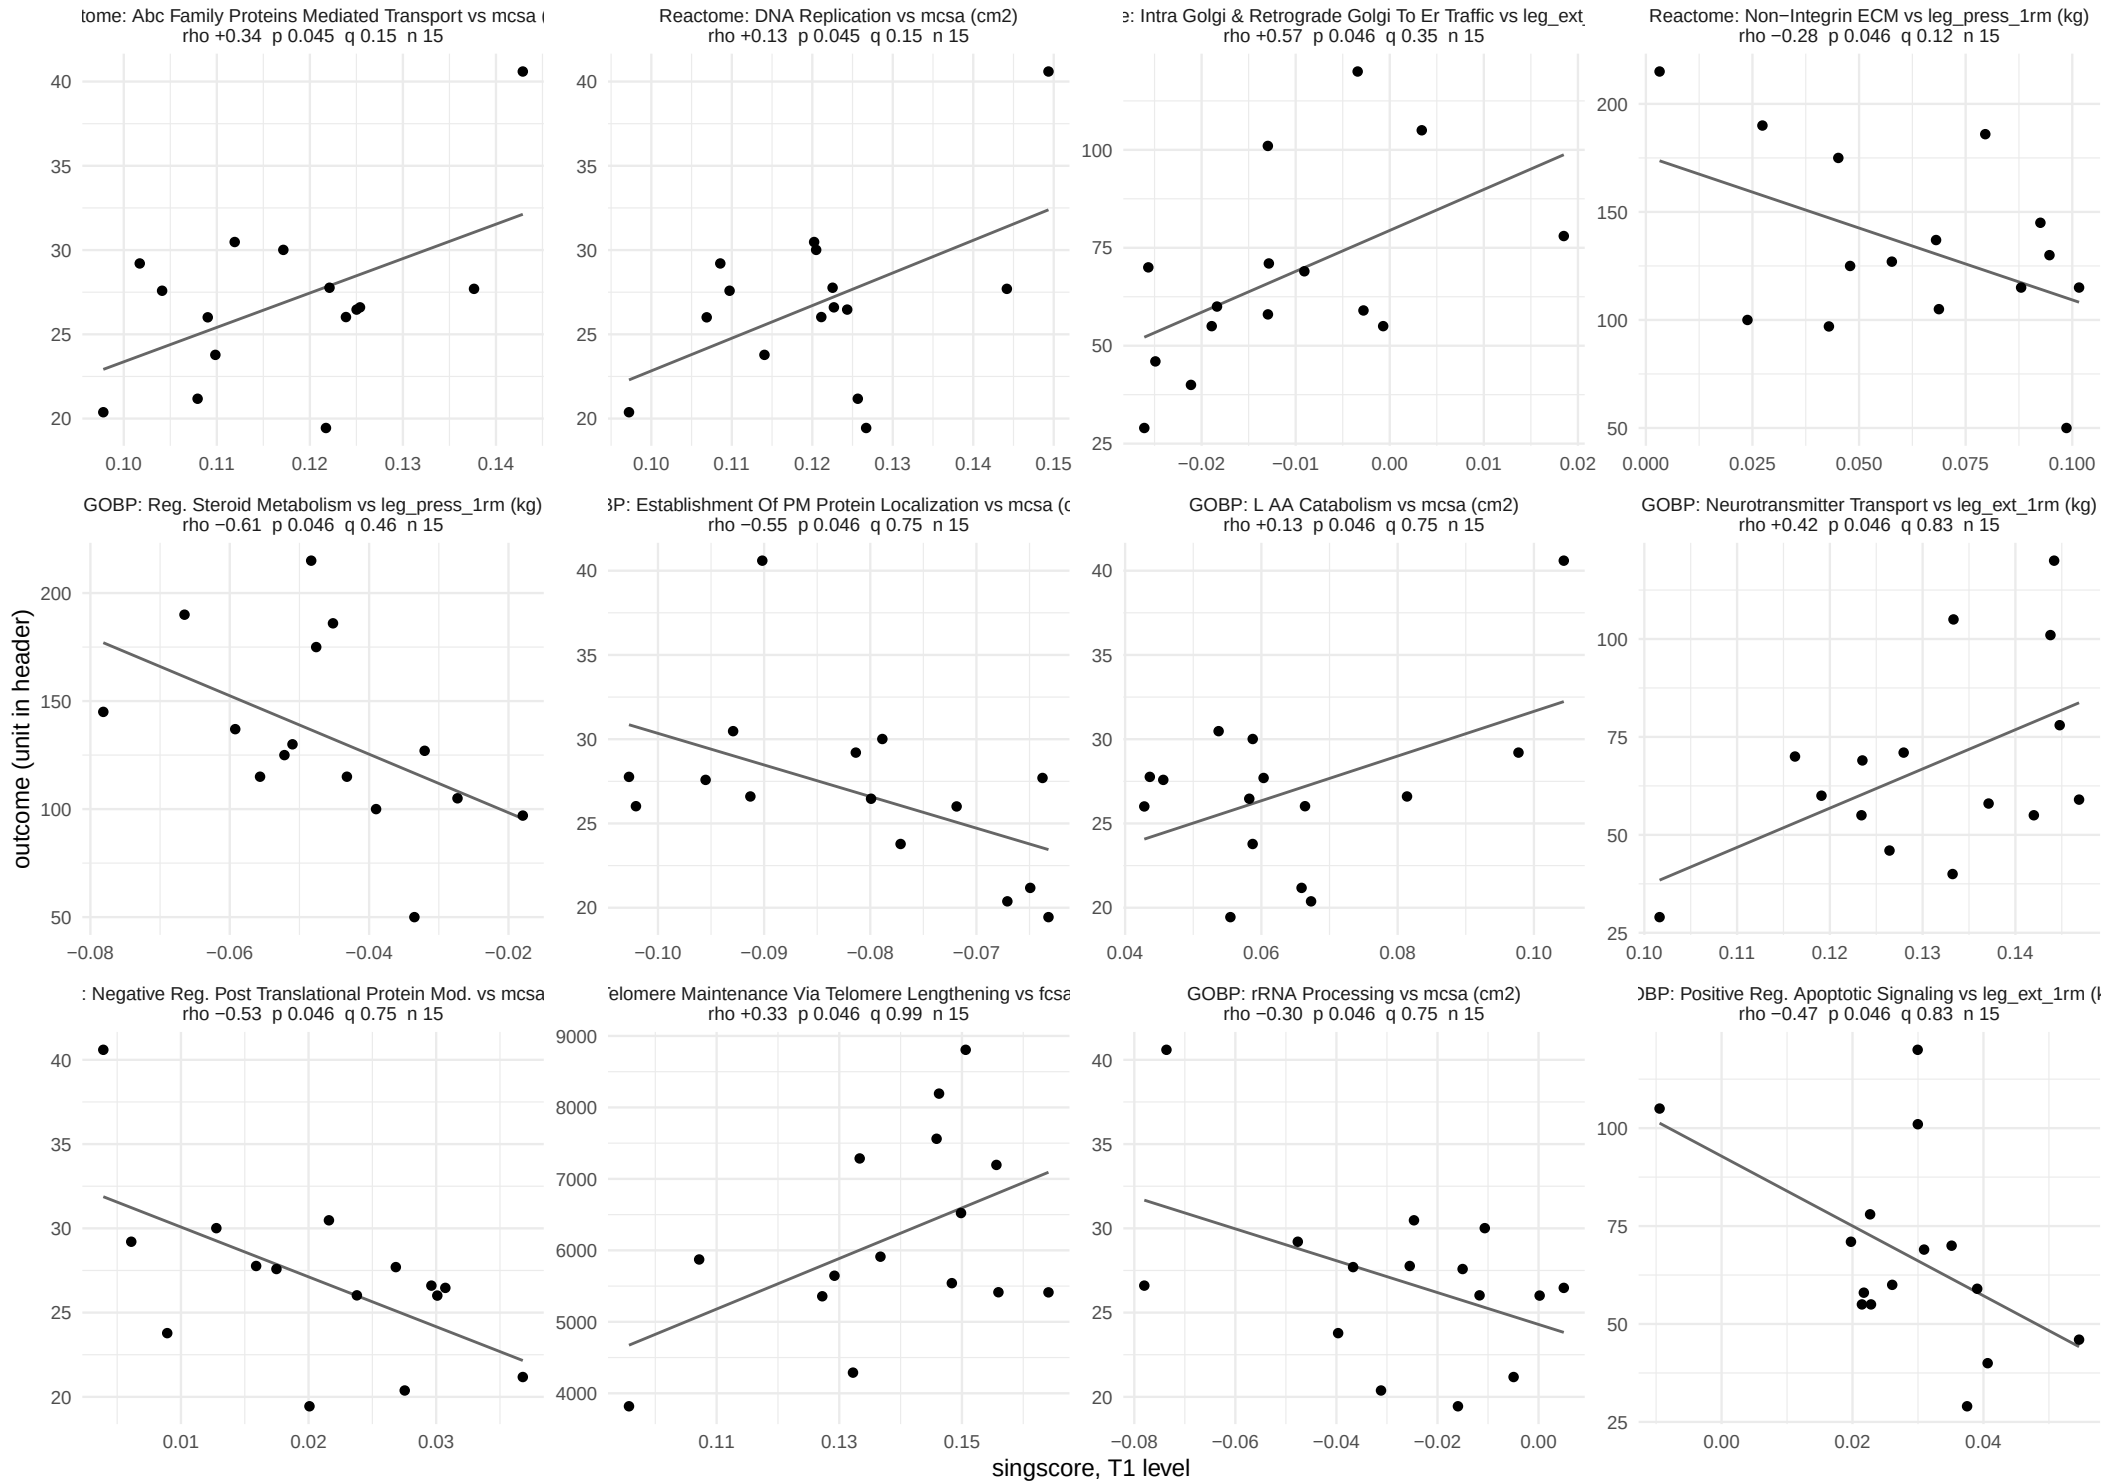

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, baseline_level window


673 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 54 of 57.

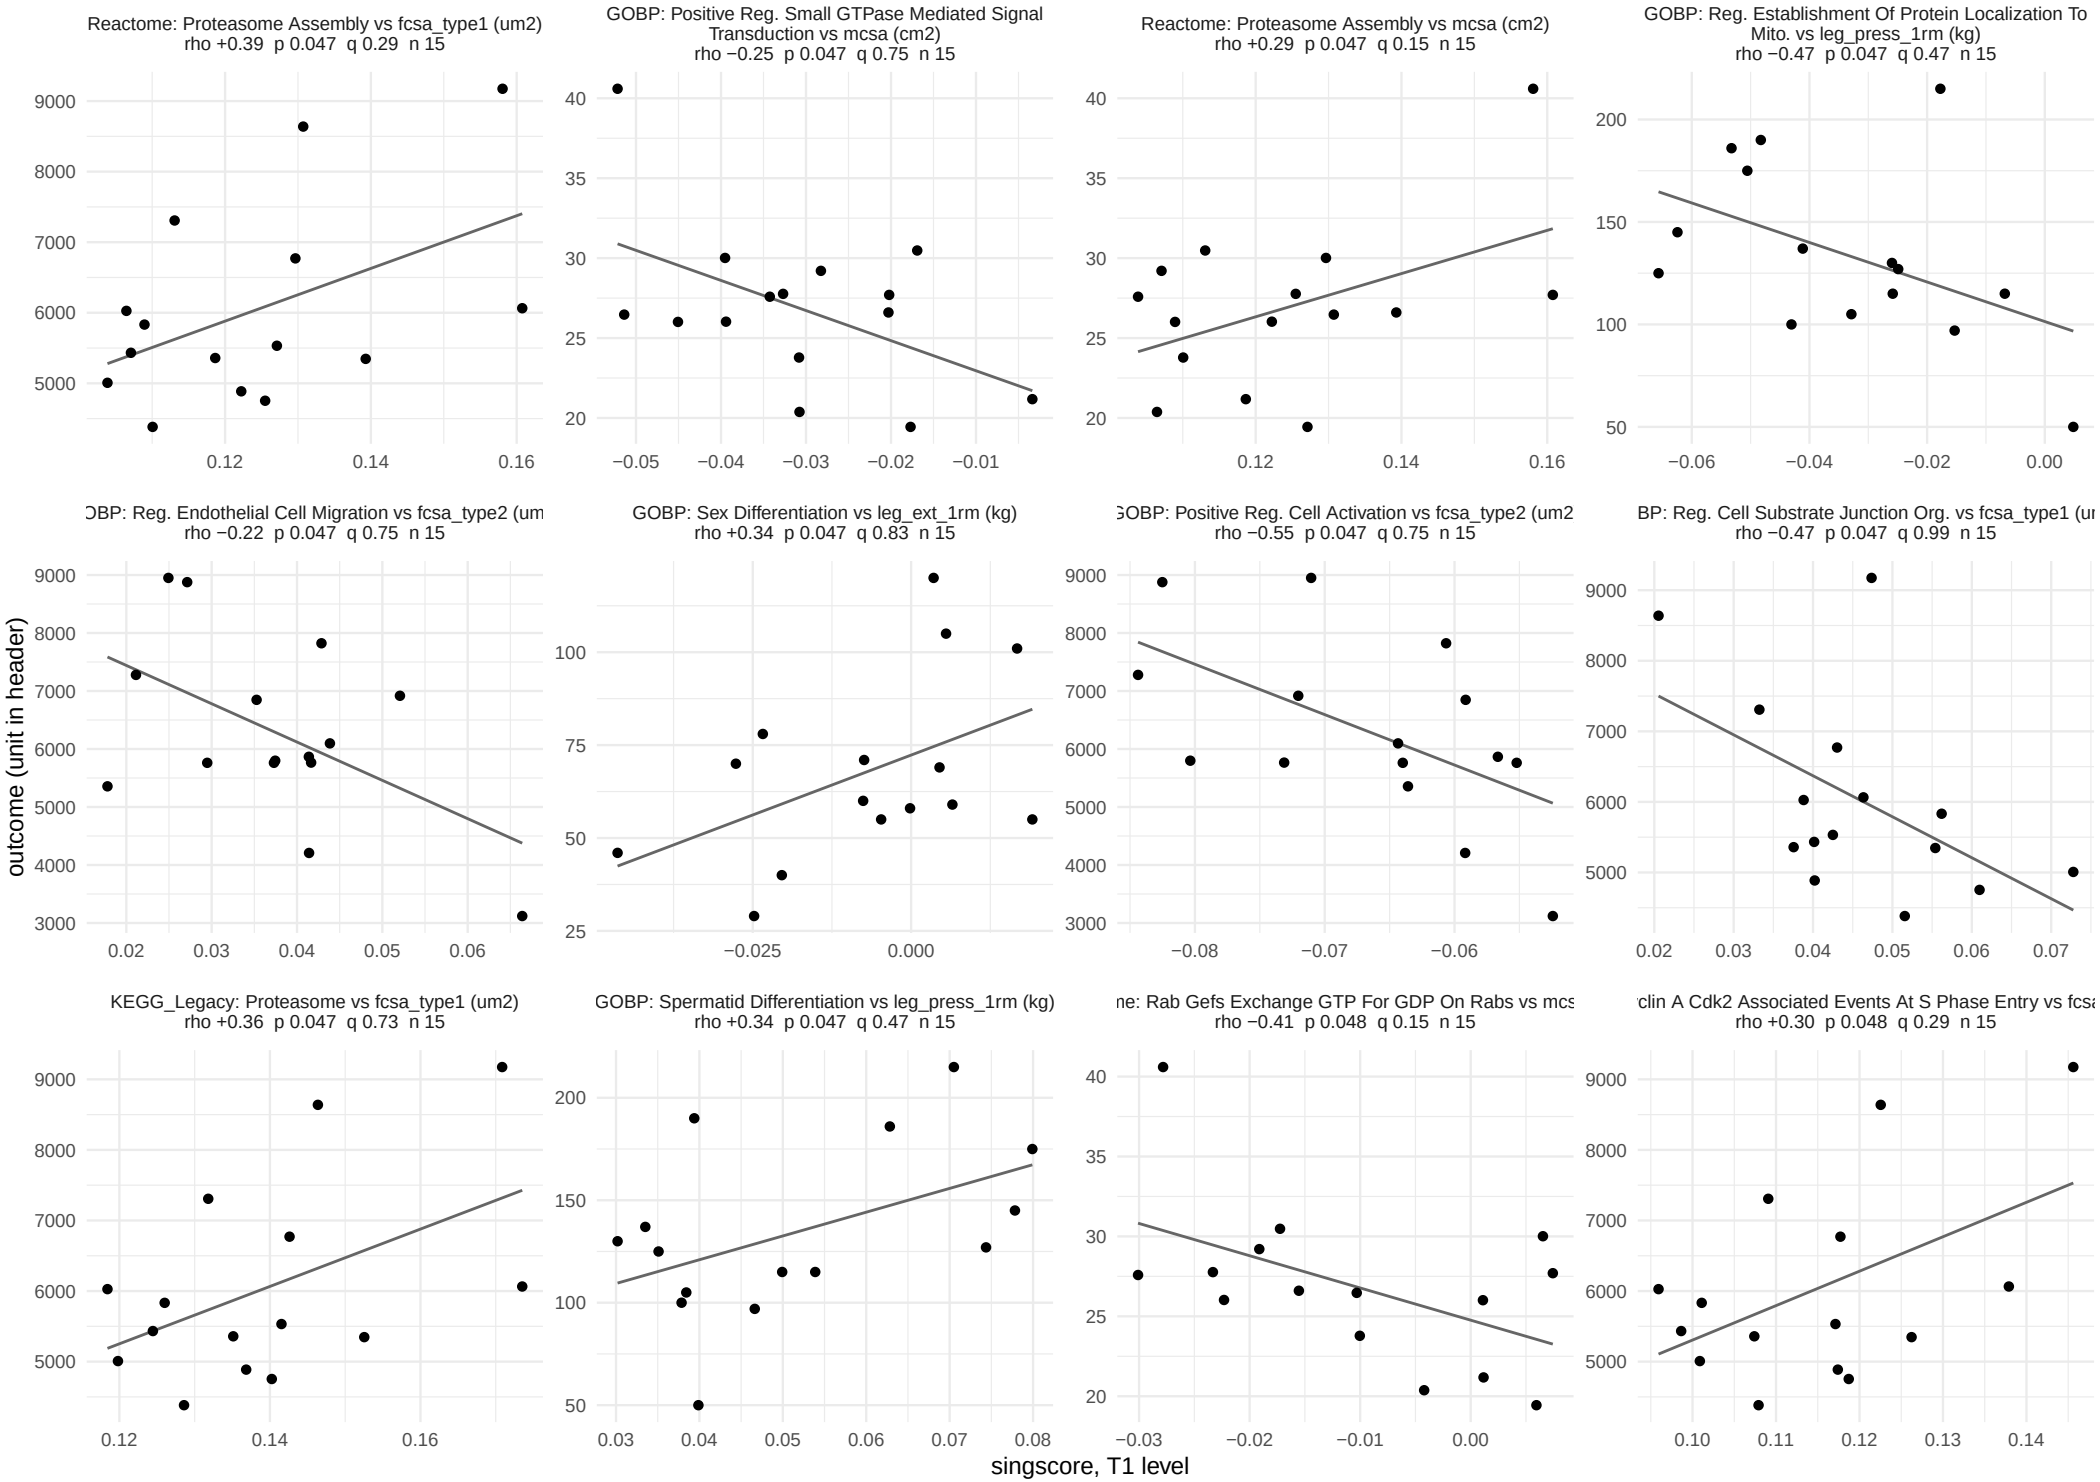

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, baseline_level window


673 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 55 of 57.

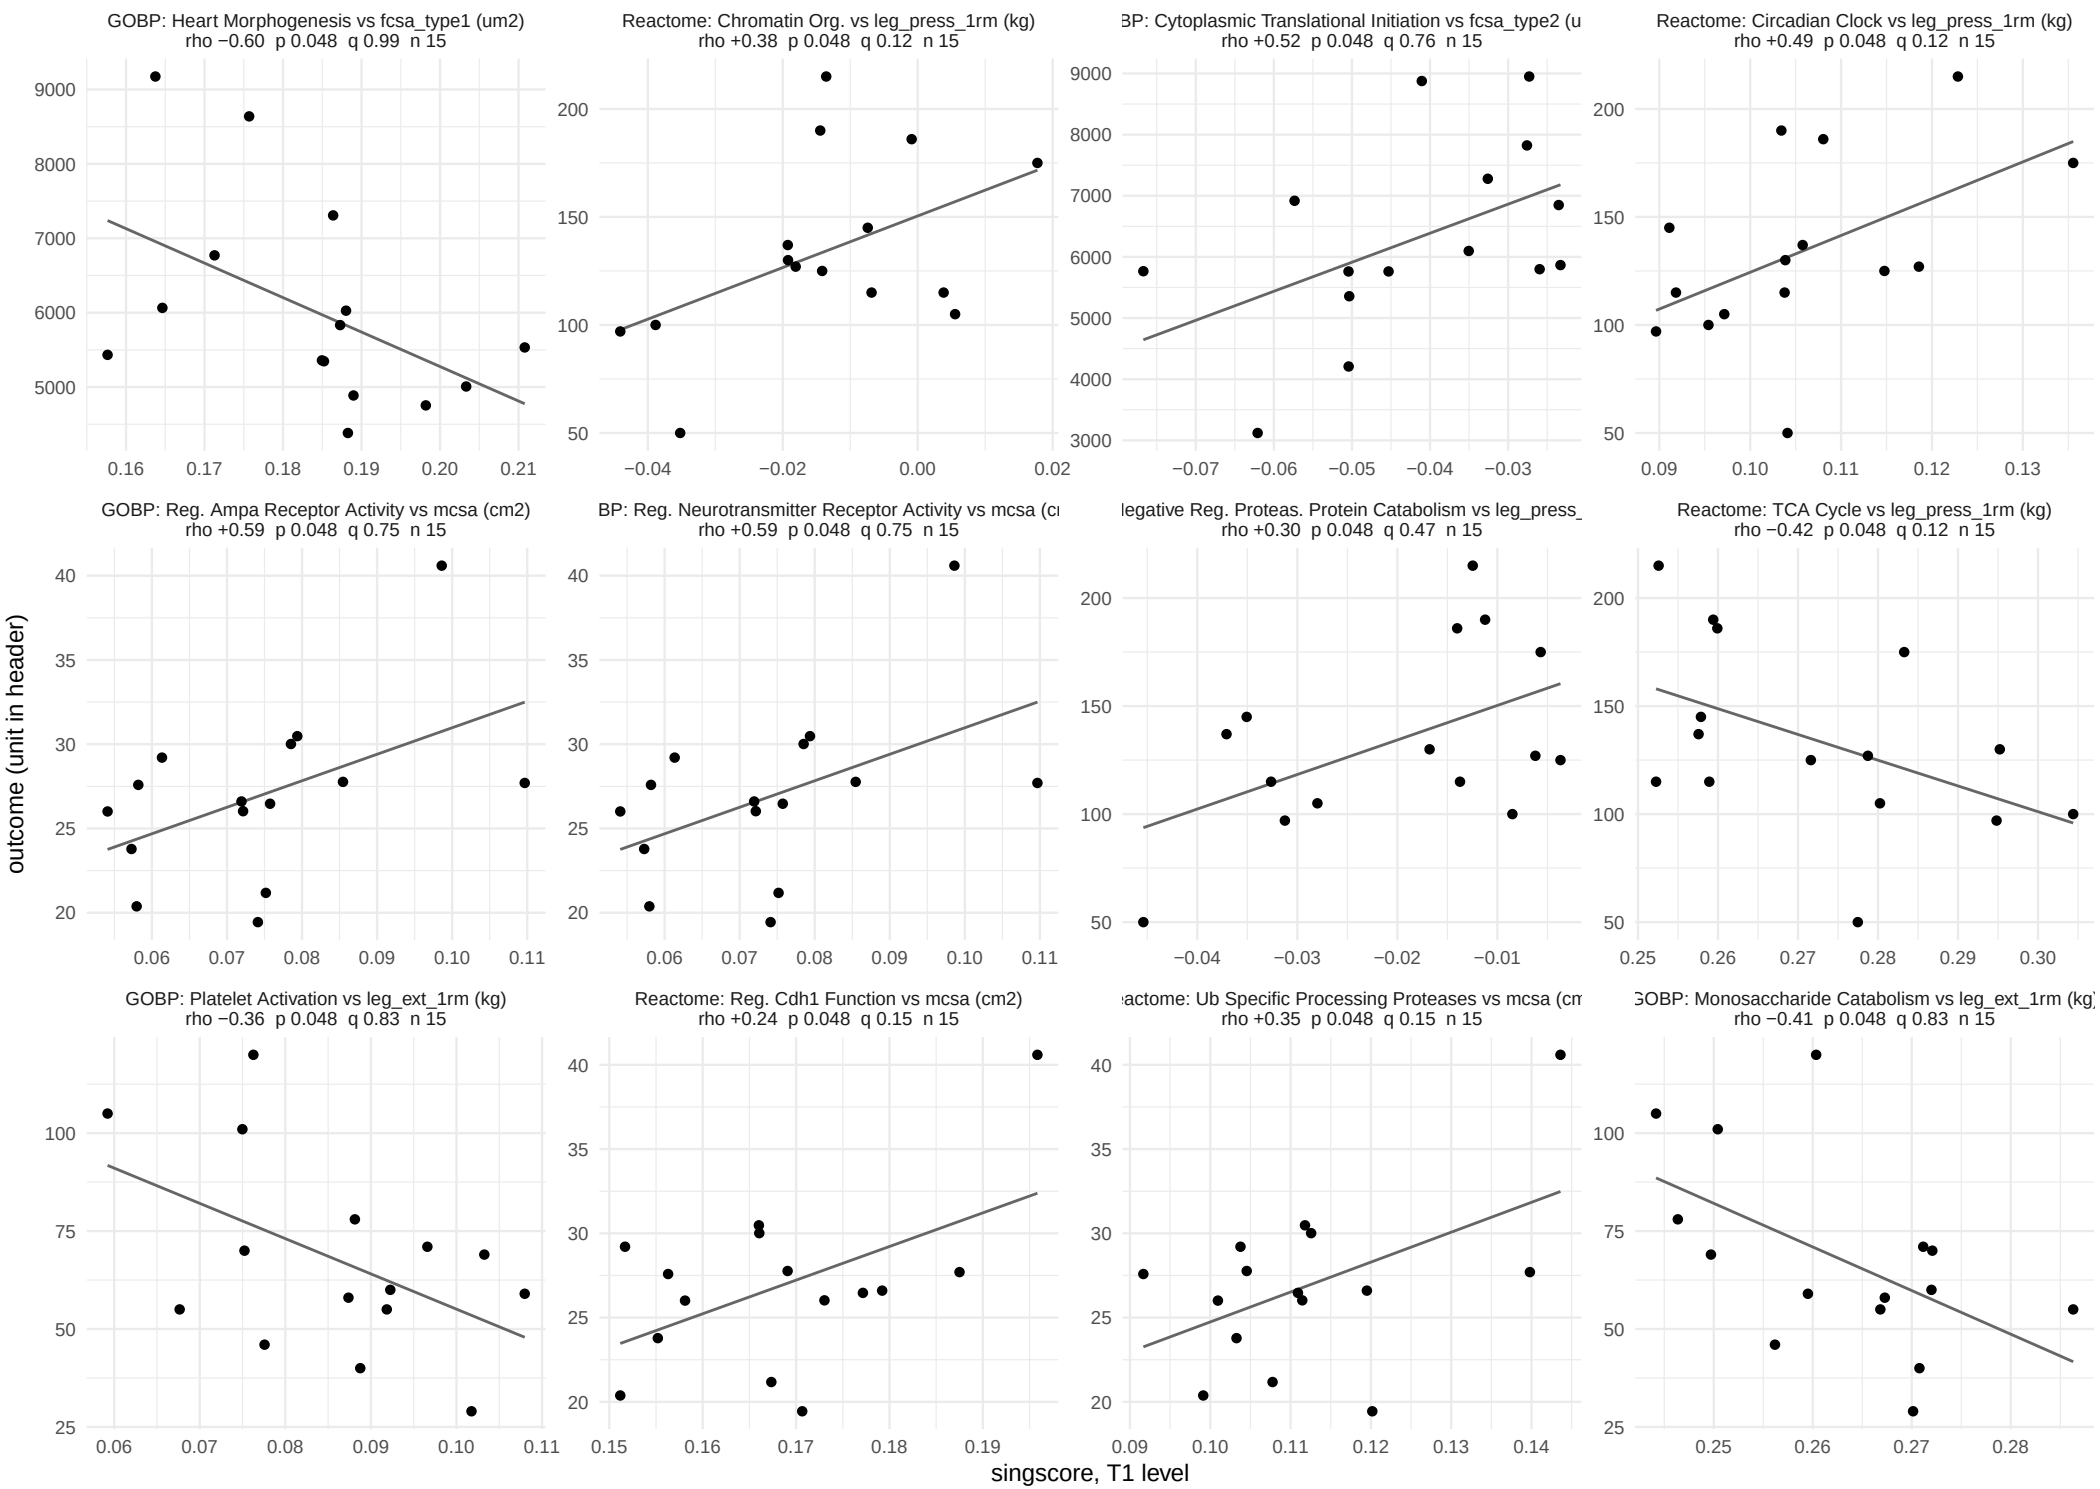

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, baseline_level window


673 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 56 of 57.

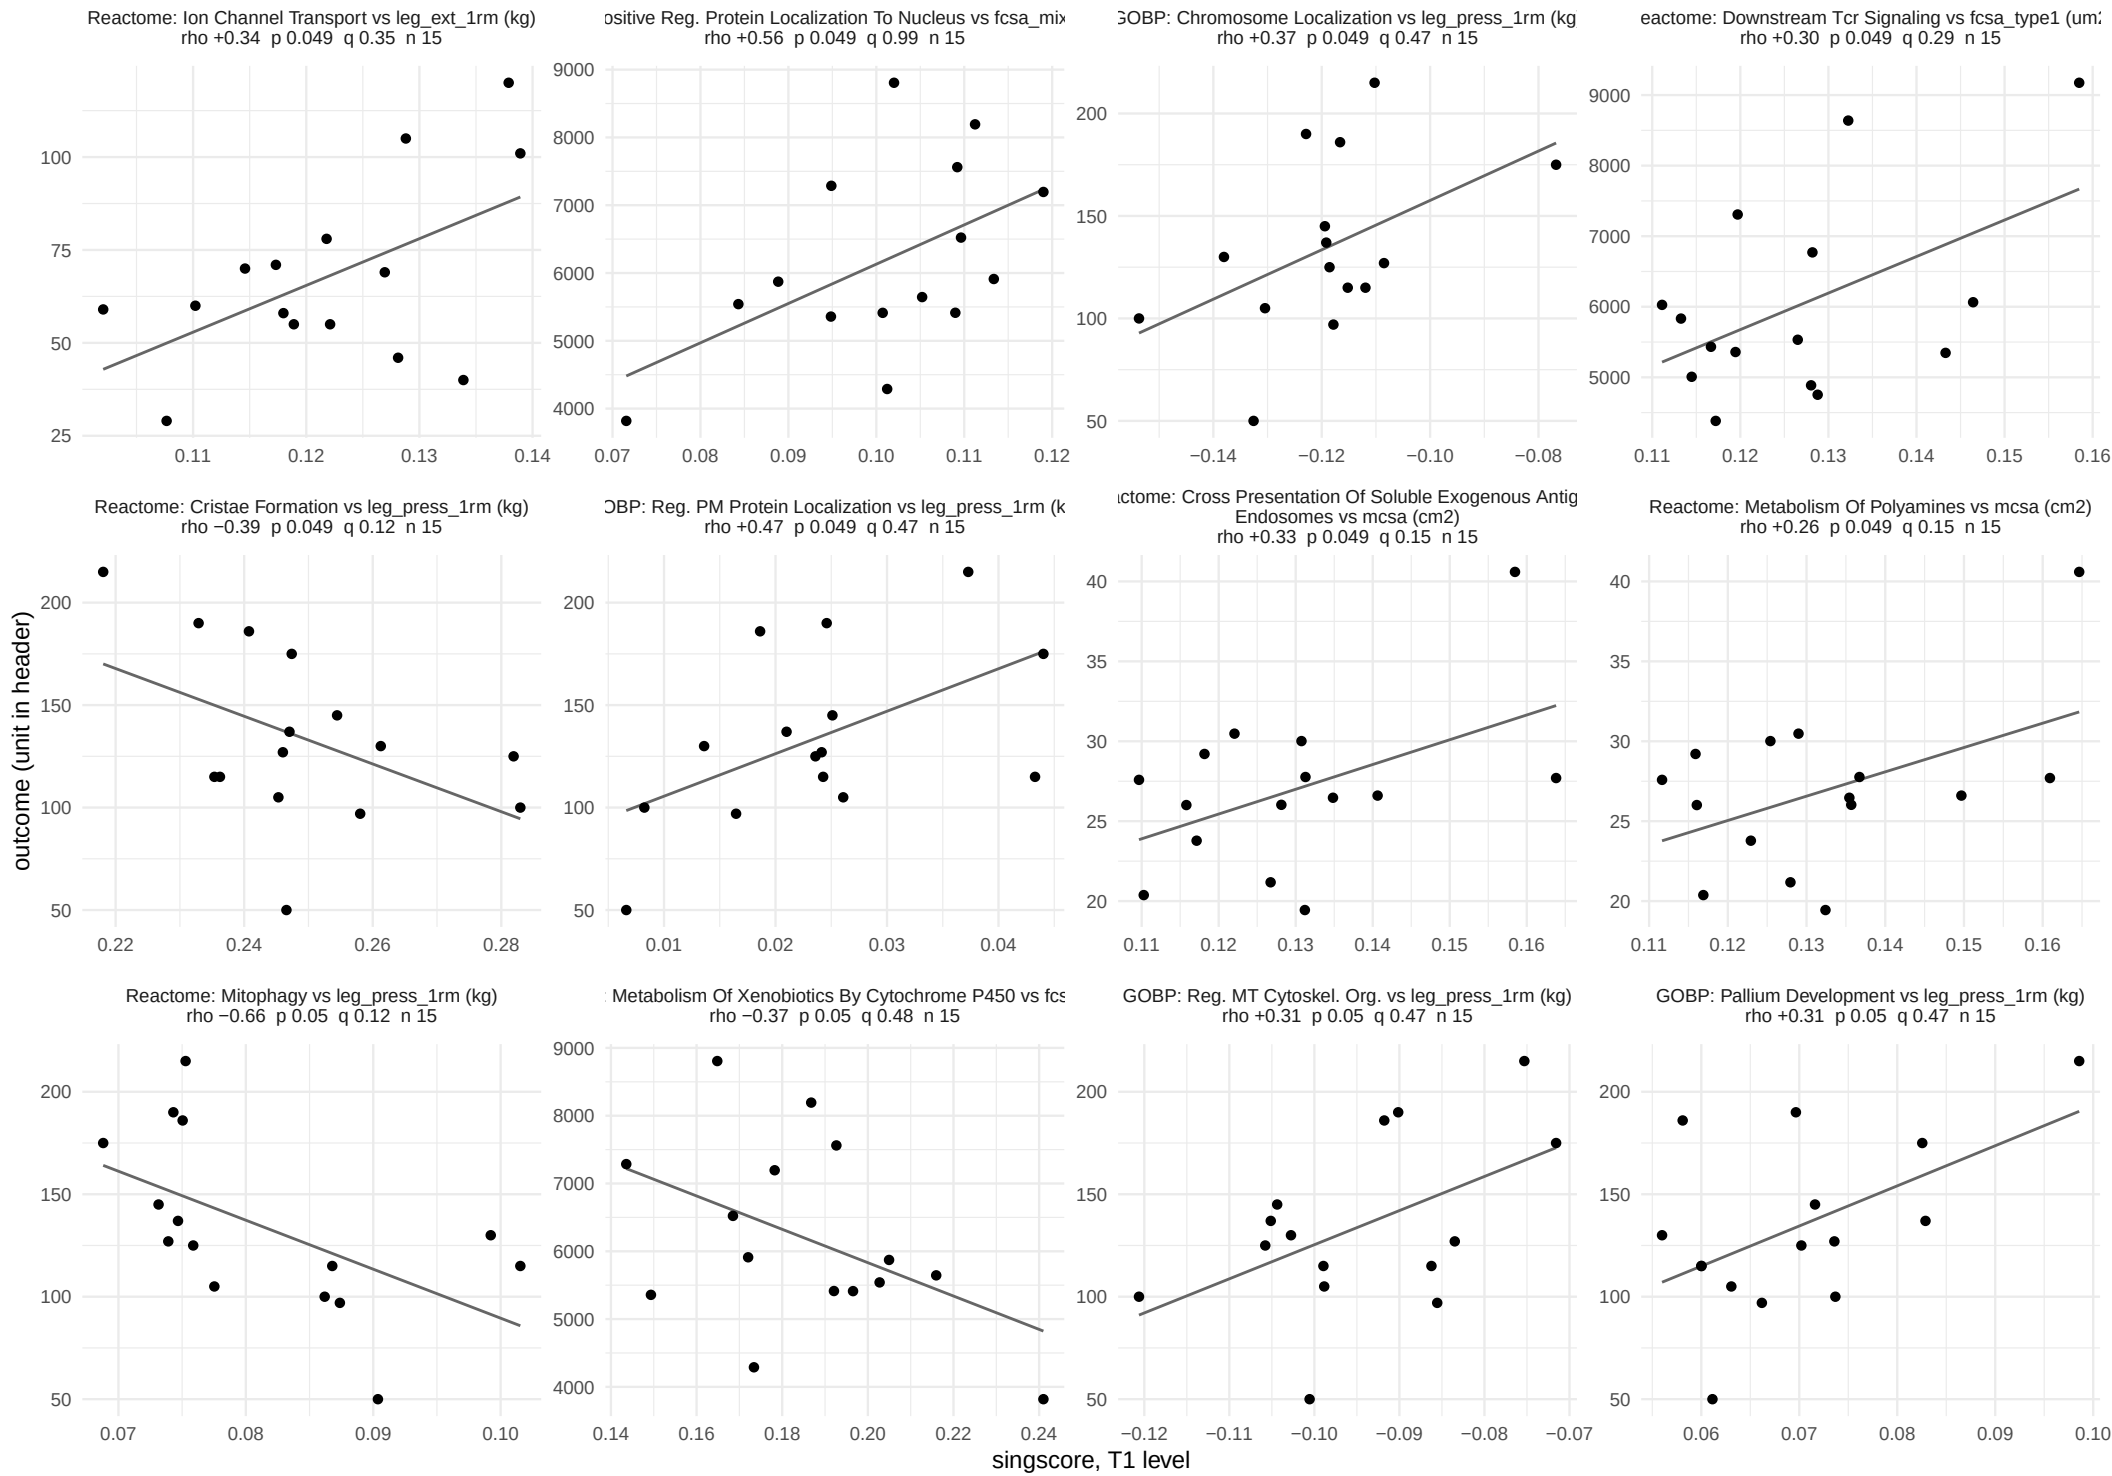

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, baseline_level window


673 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 57 of 57.

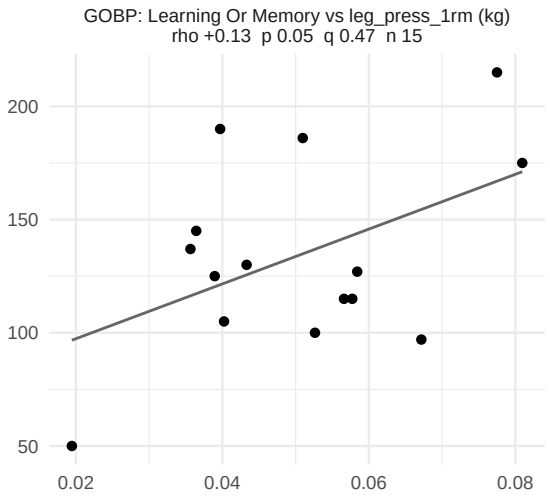

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, post_level window


380 of 8268 feature−outcome pairs at p < 0.05, 5 at BH < 0.05. Page 1 of 32.

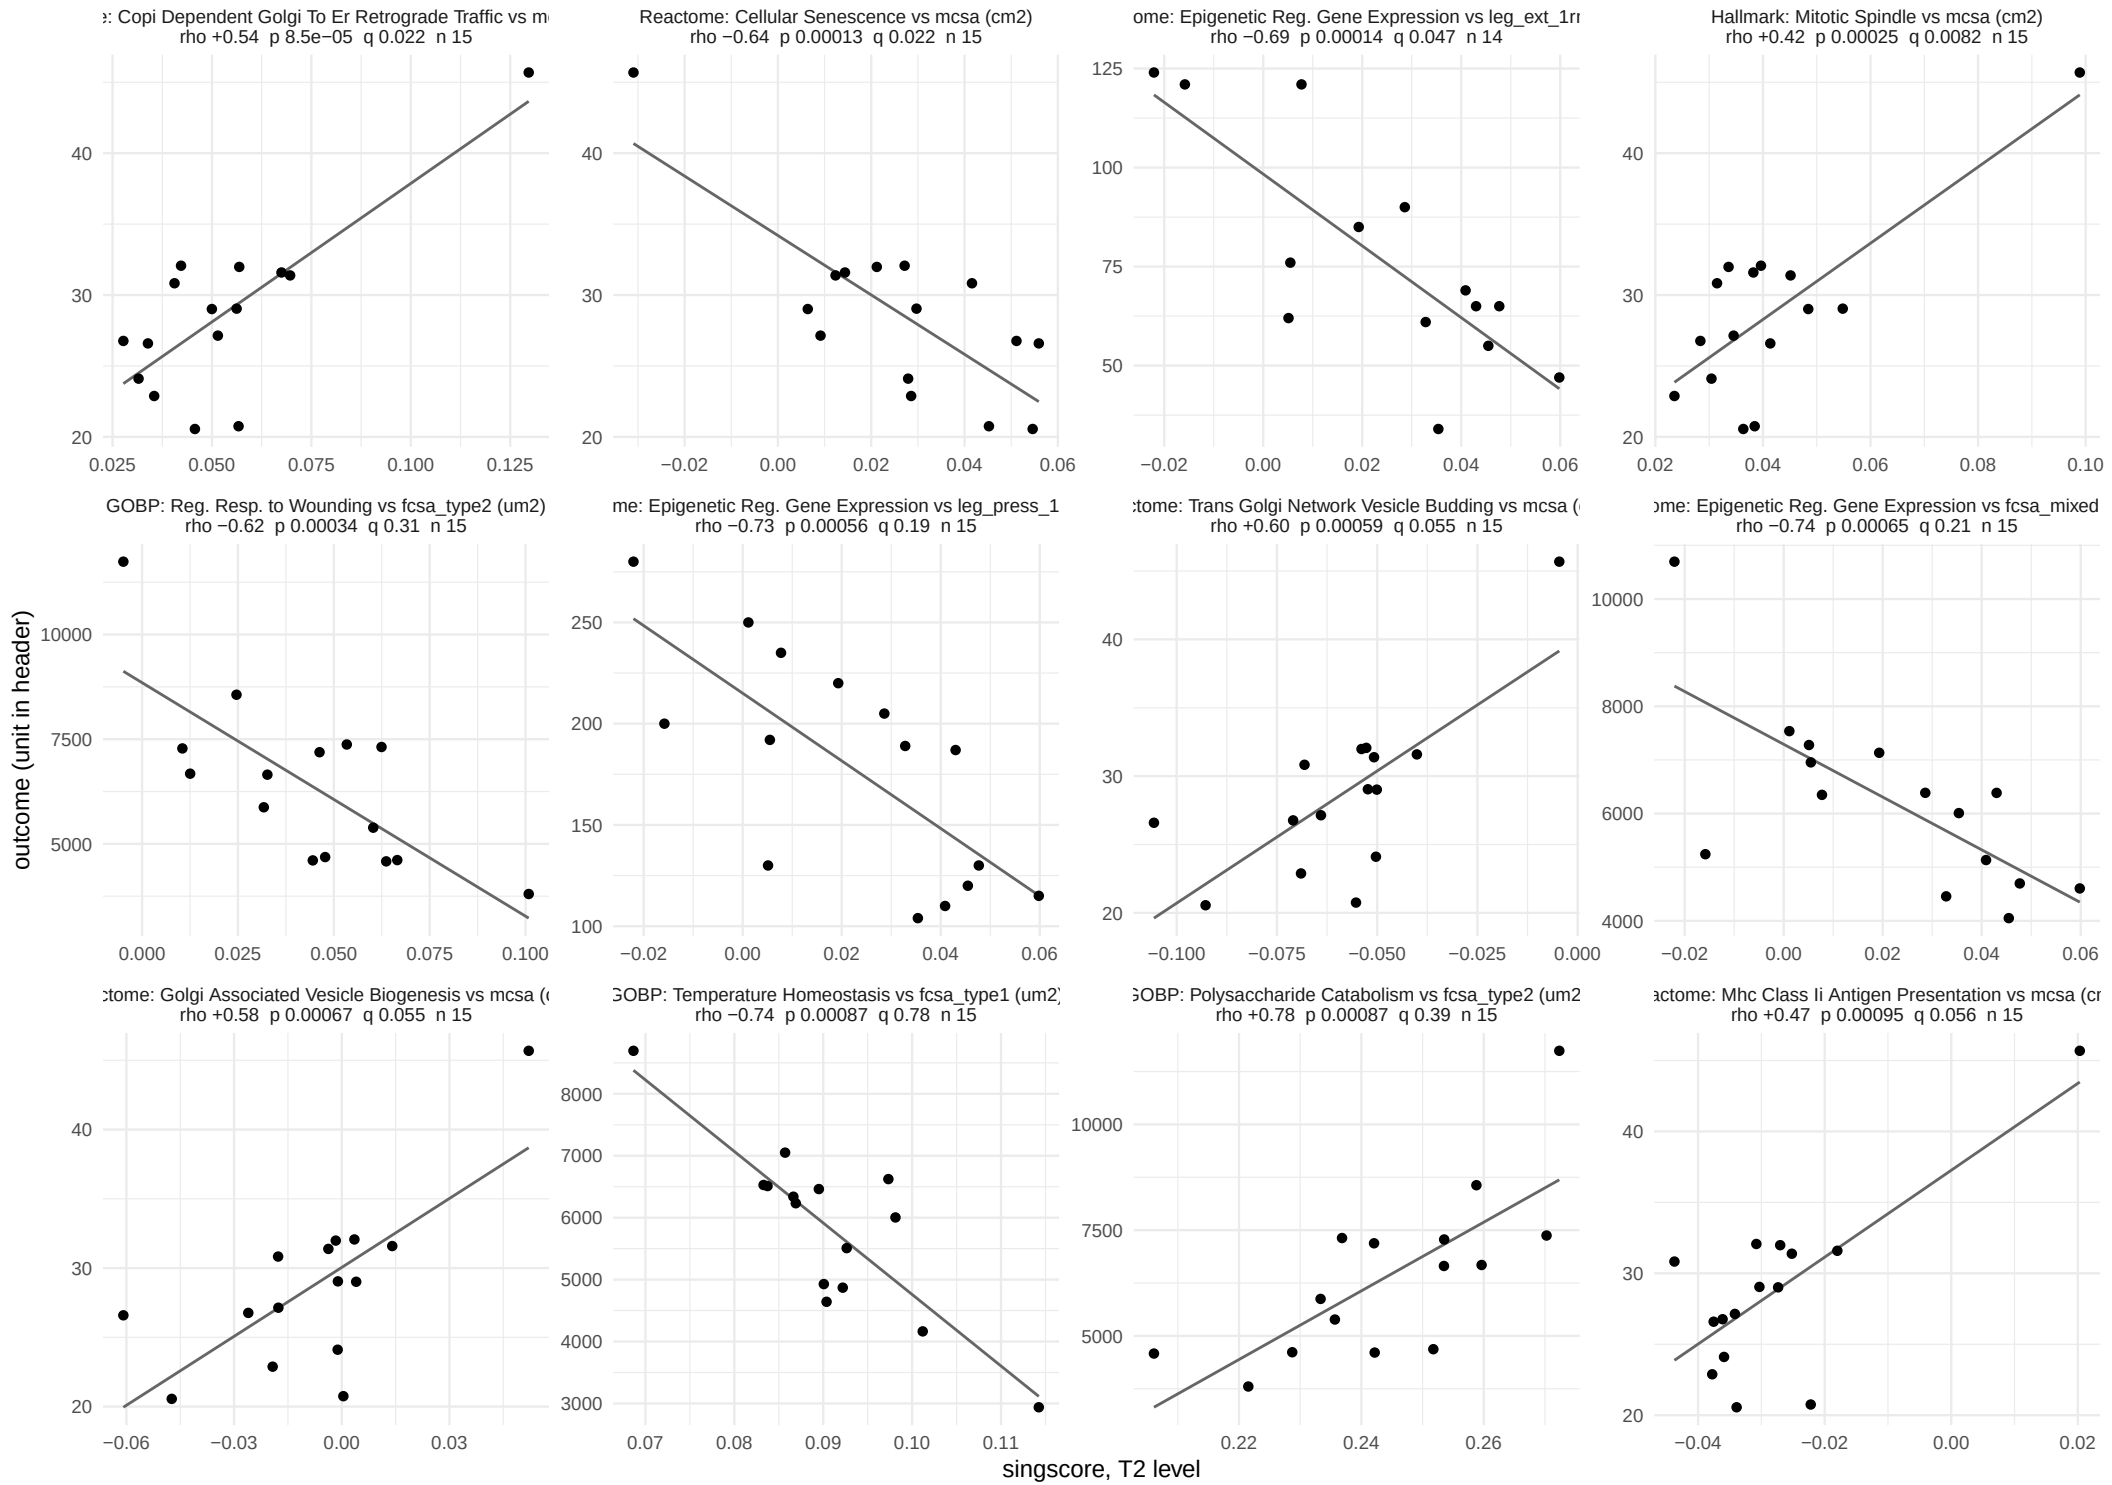

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, post_level window


380 of 8268 feature−outcome pairs at p < 0.05, 5 at BH < 0.05. Page 2 of 32.

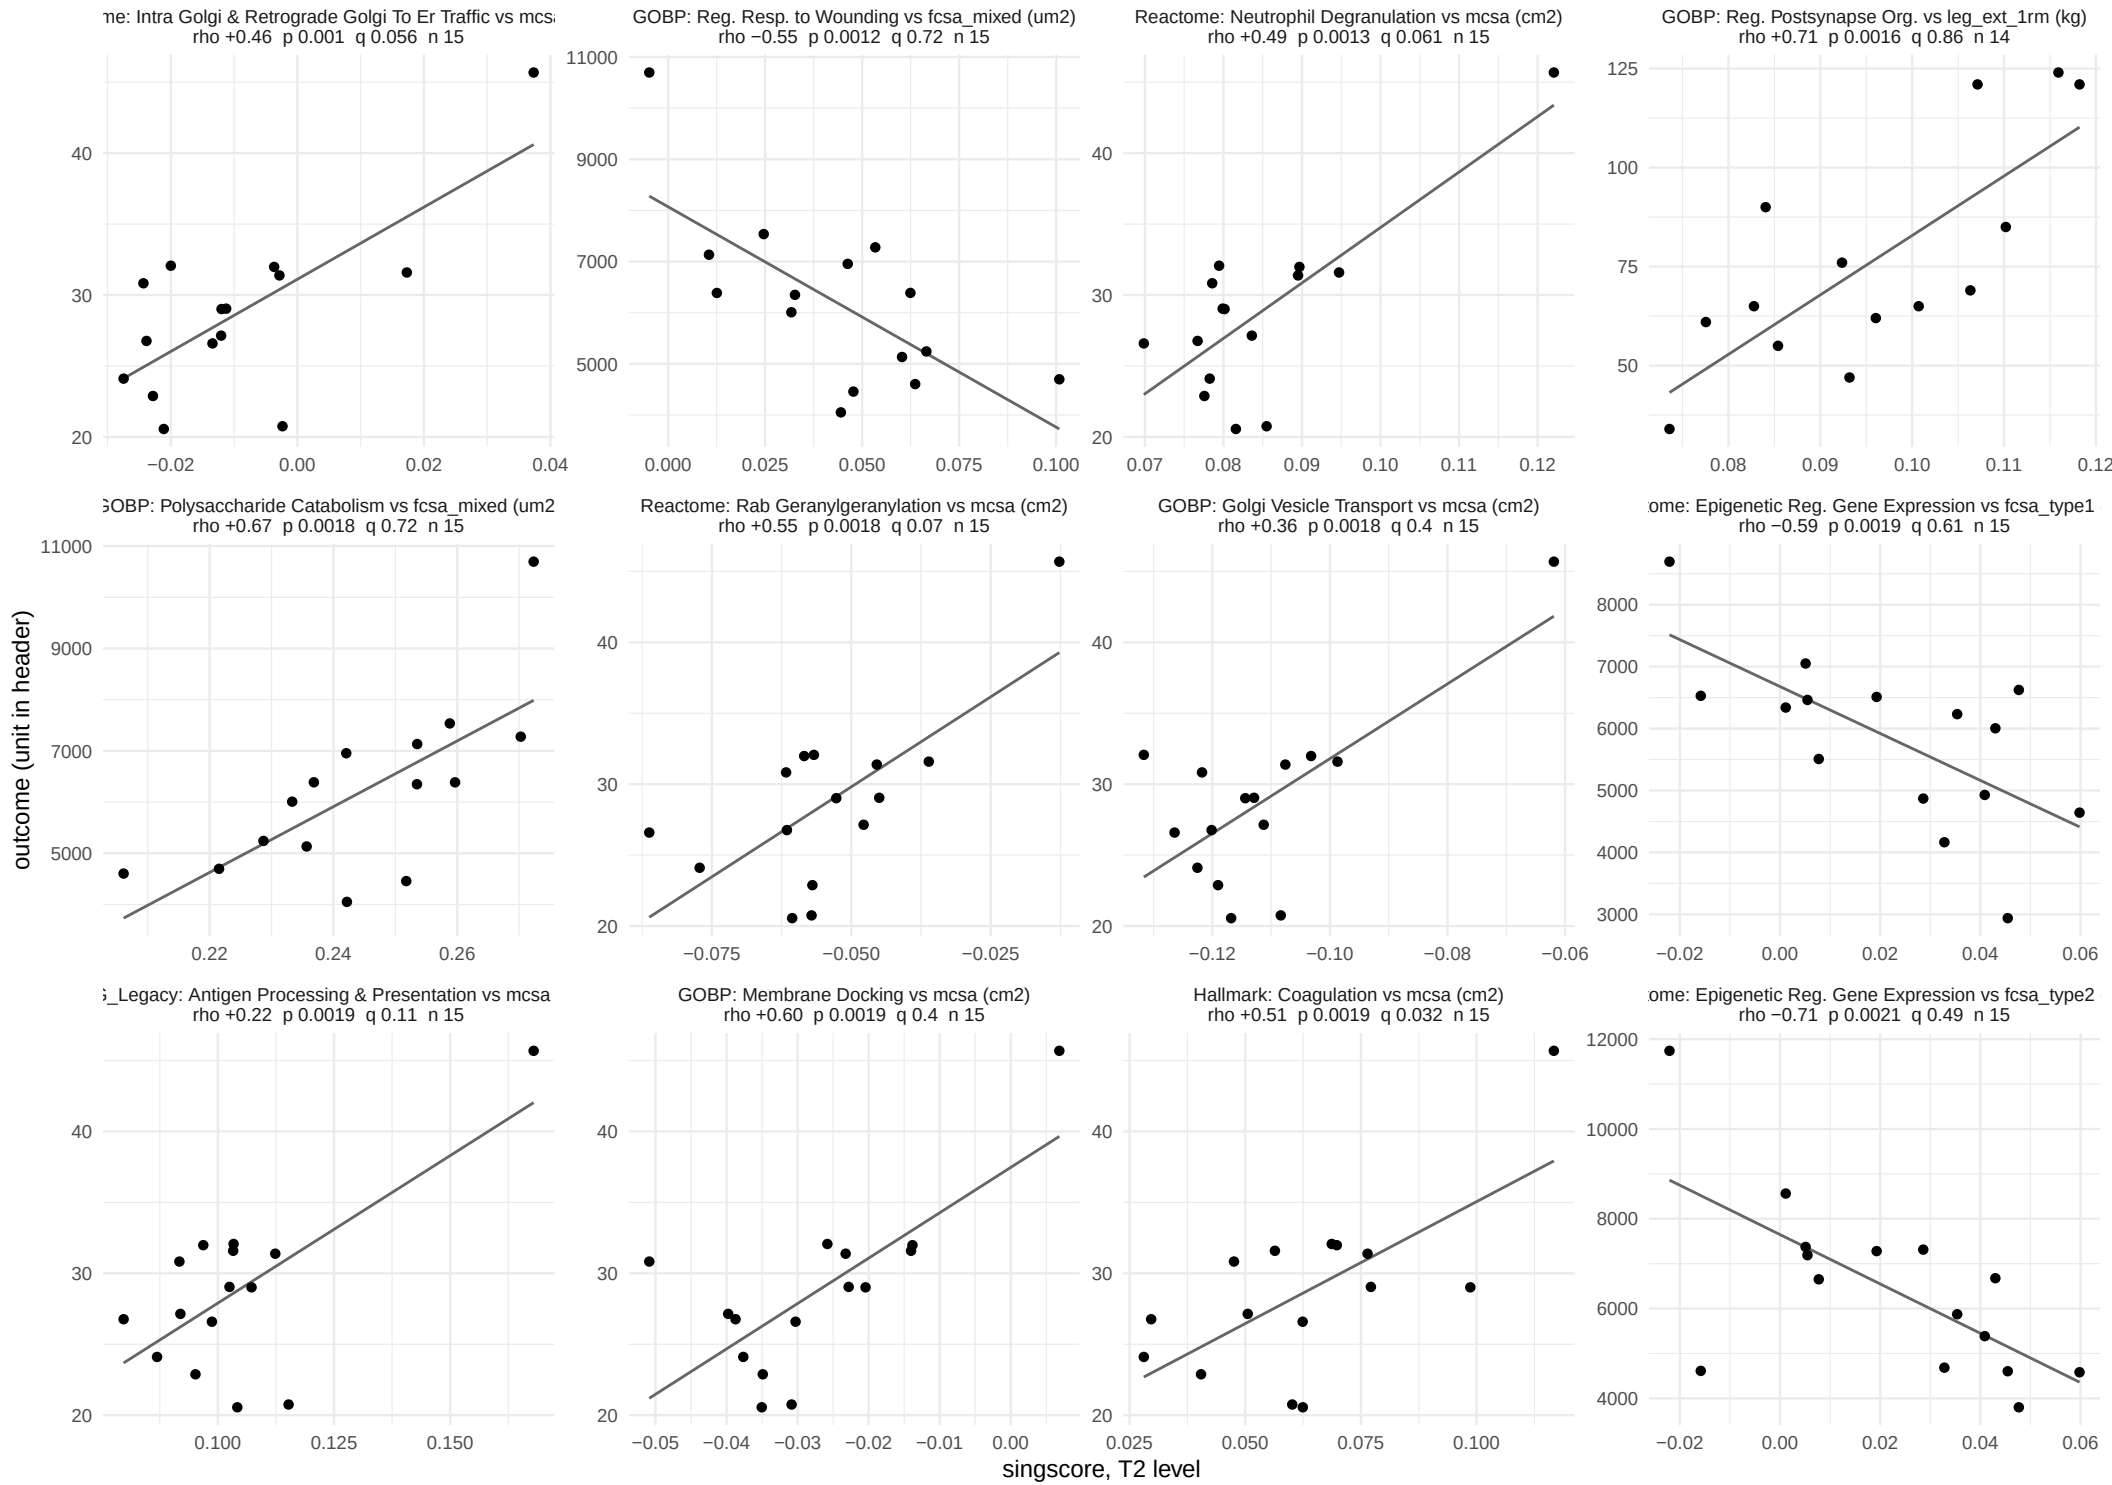

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, post_level window


380 of 8268 feature−outcome pairs at p < 0.05, 5 at BH < 0.05. Page 3 of 32.

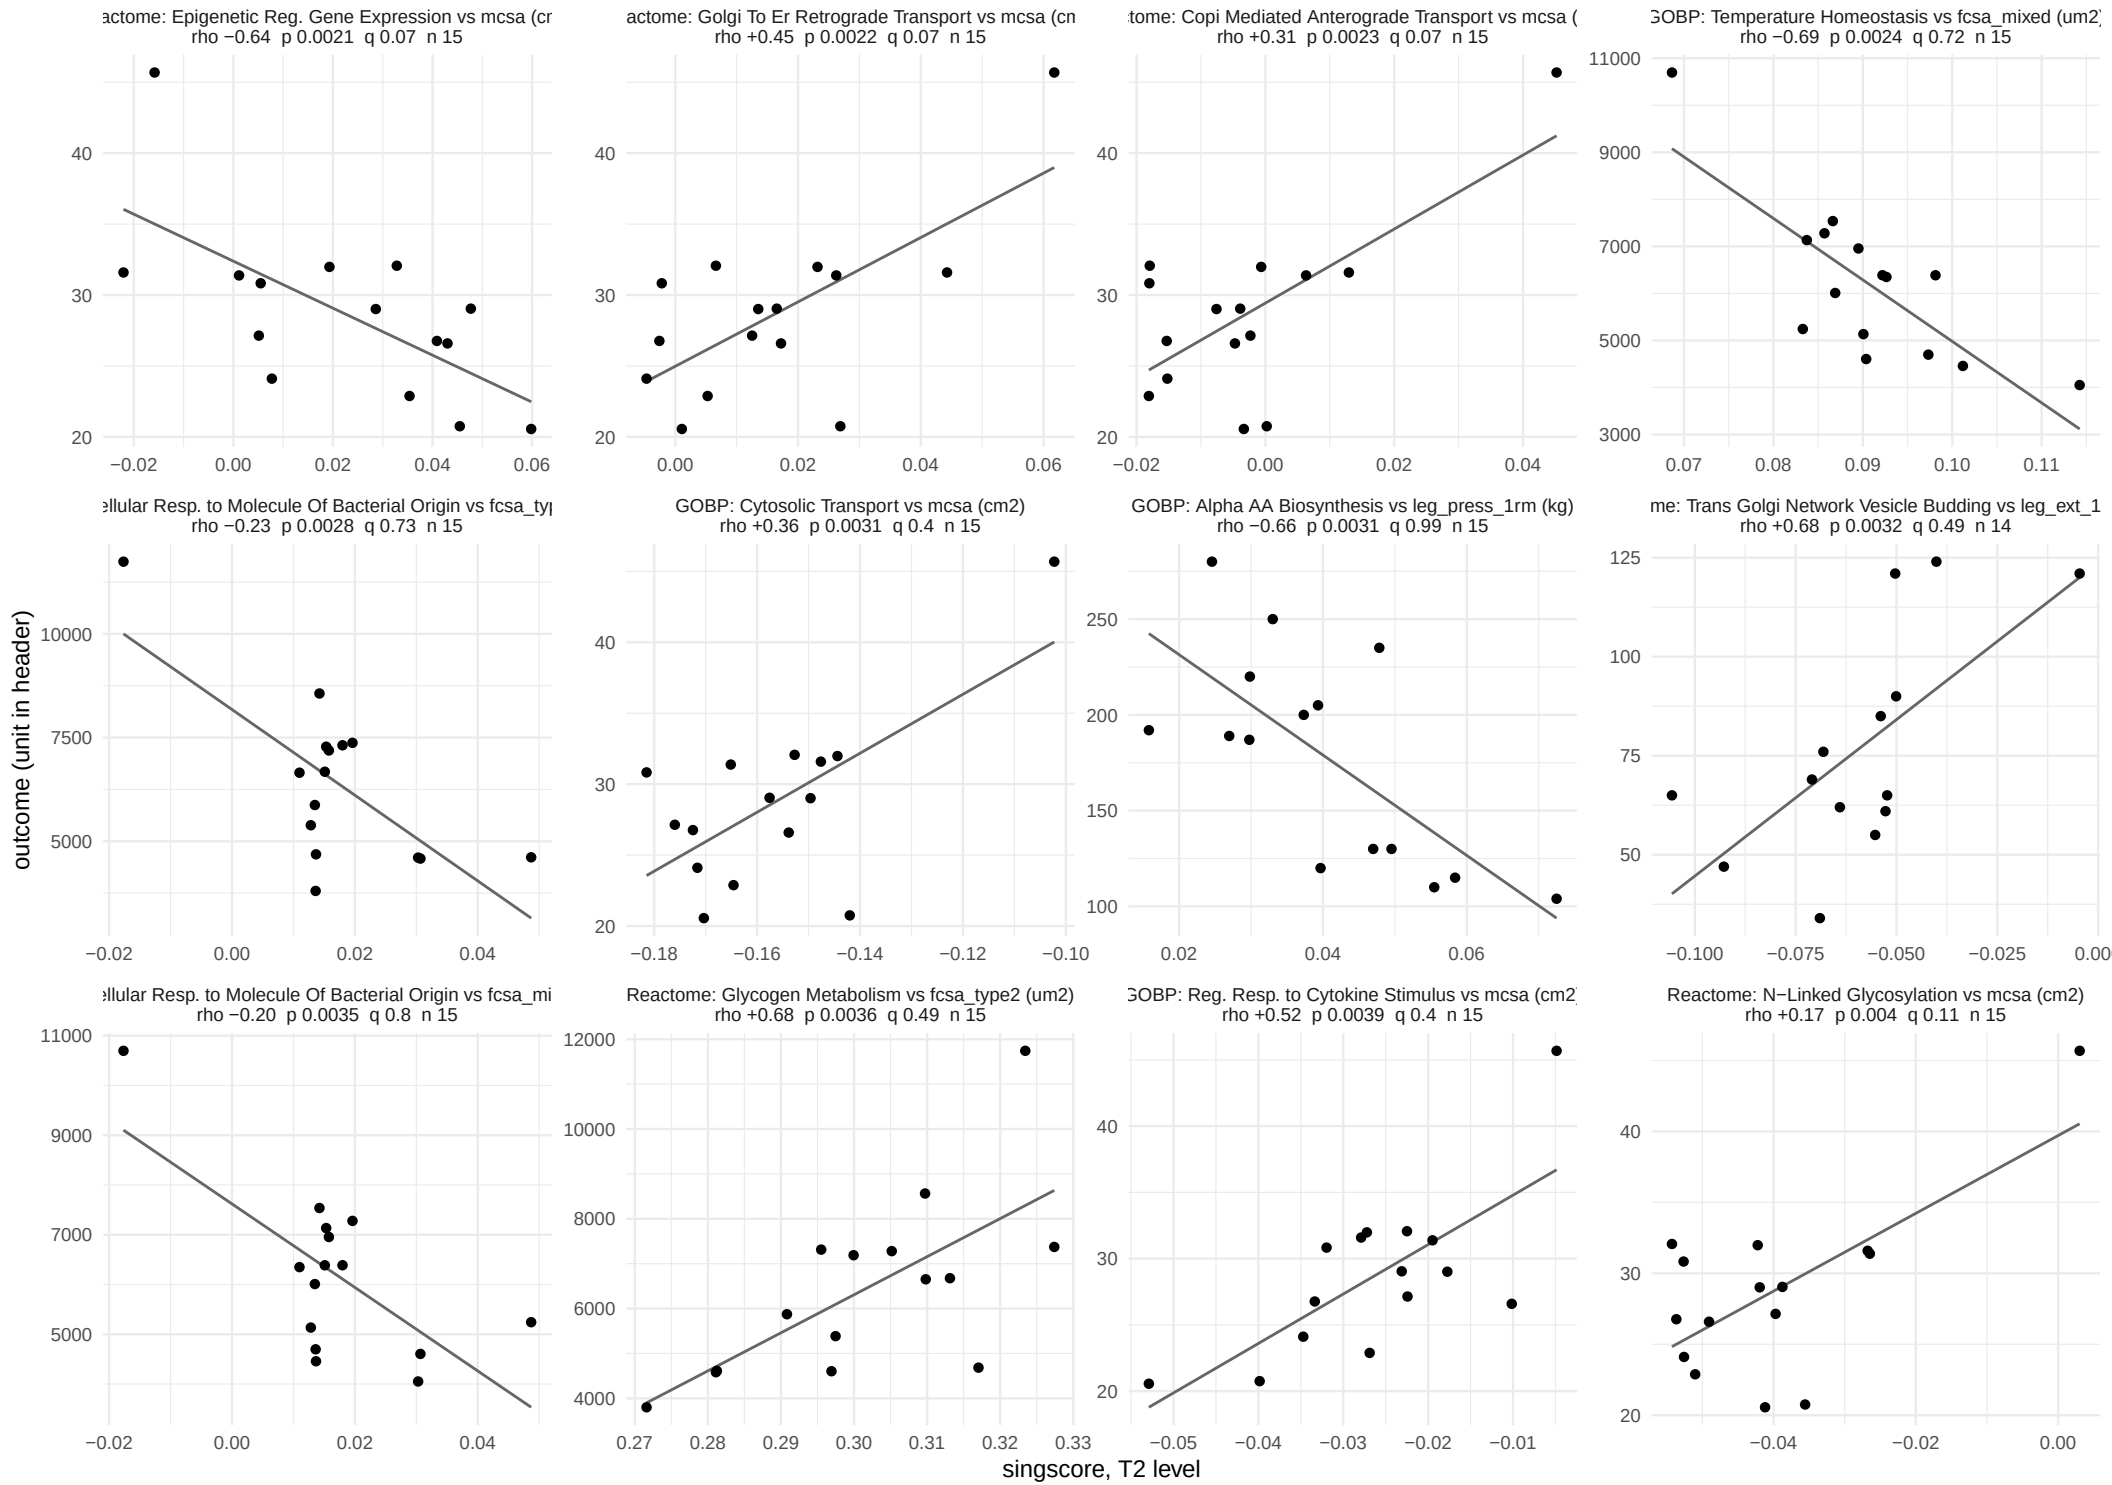

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, post_level window


380 of 8268 feature−outcome pairs at p < 0.05, 5 at BH < 0.05. Page 4 of 32.

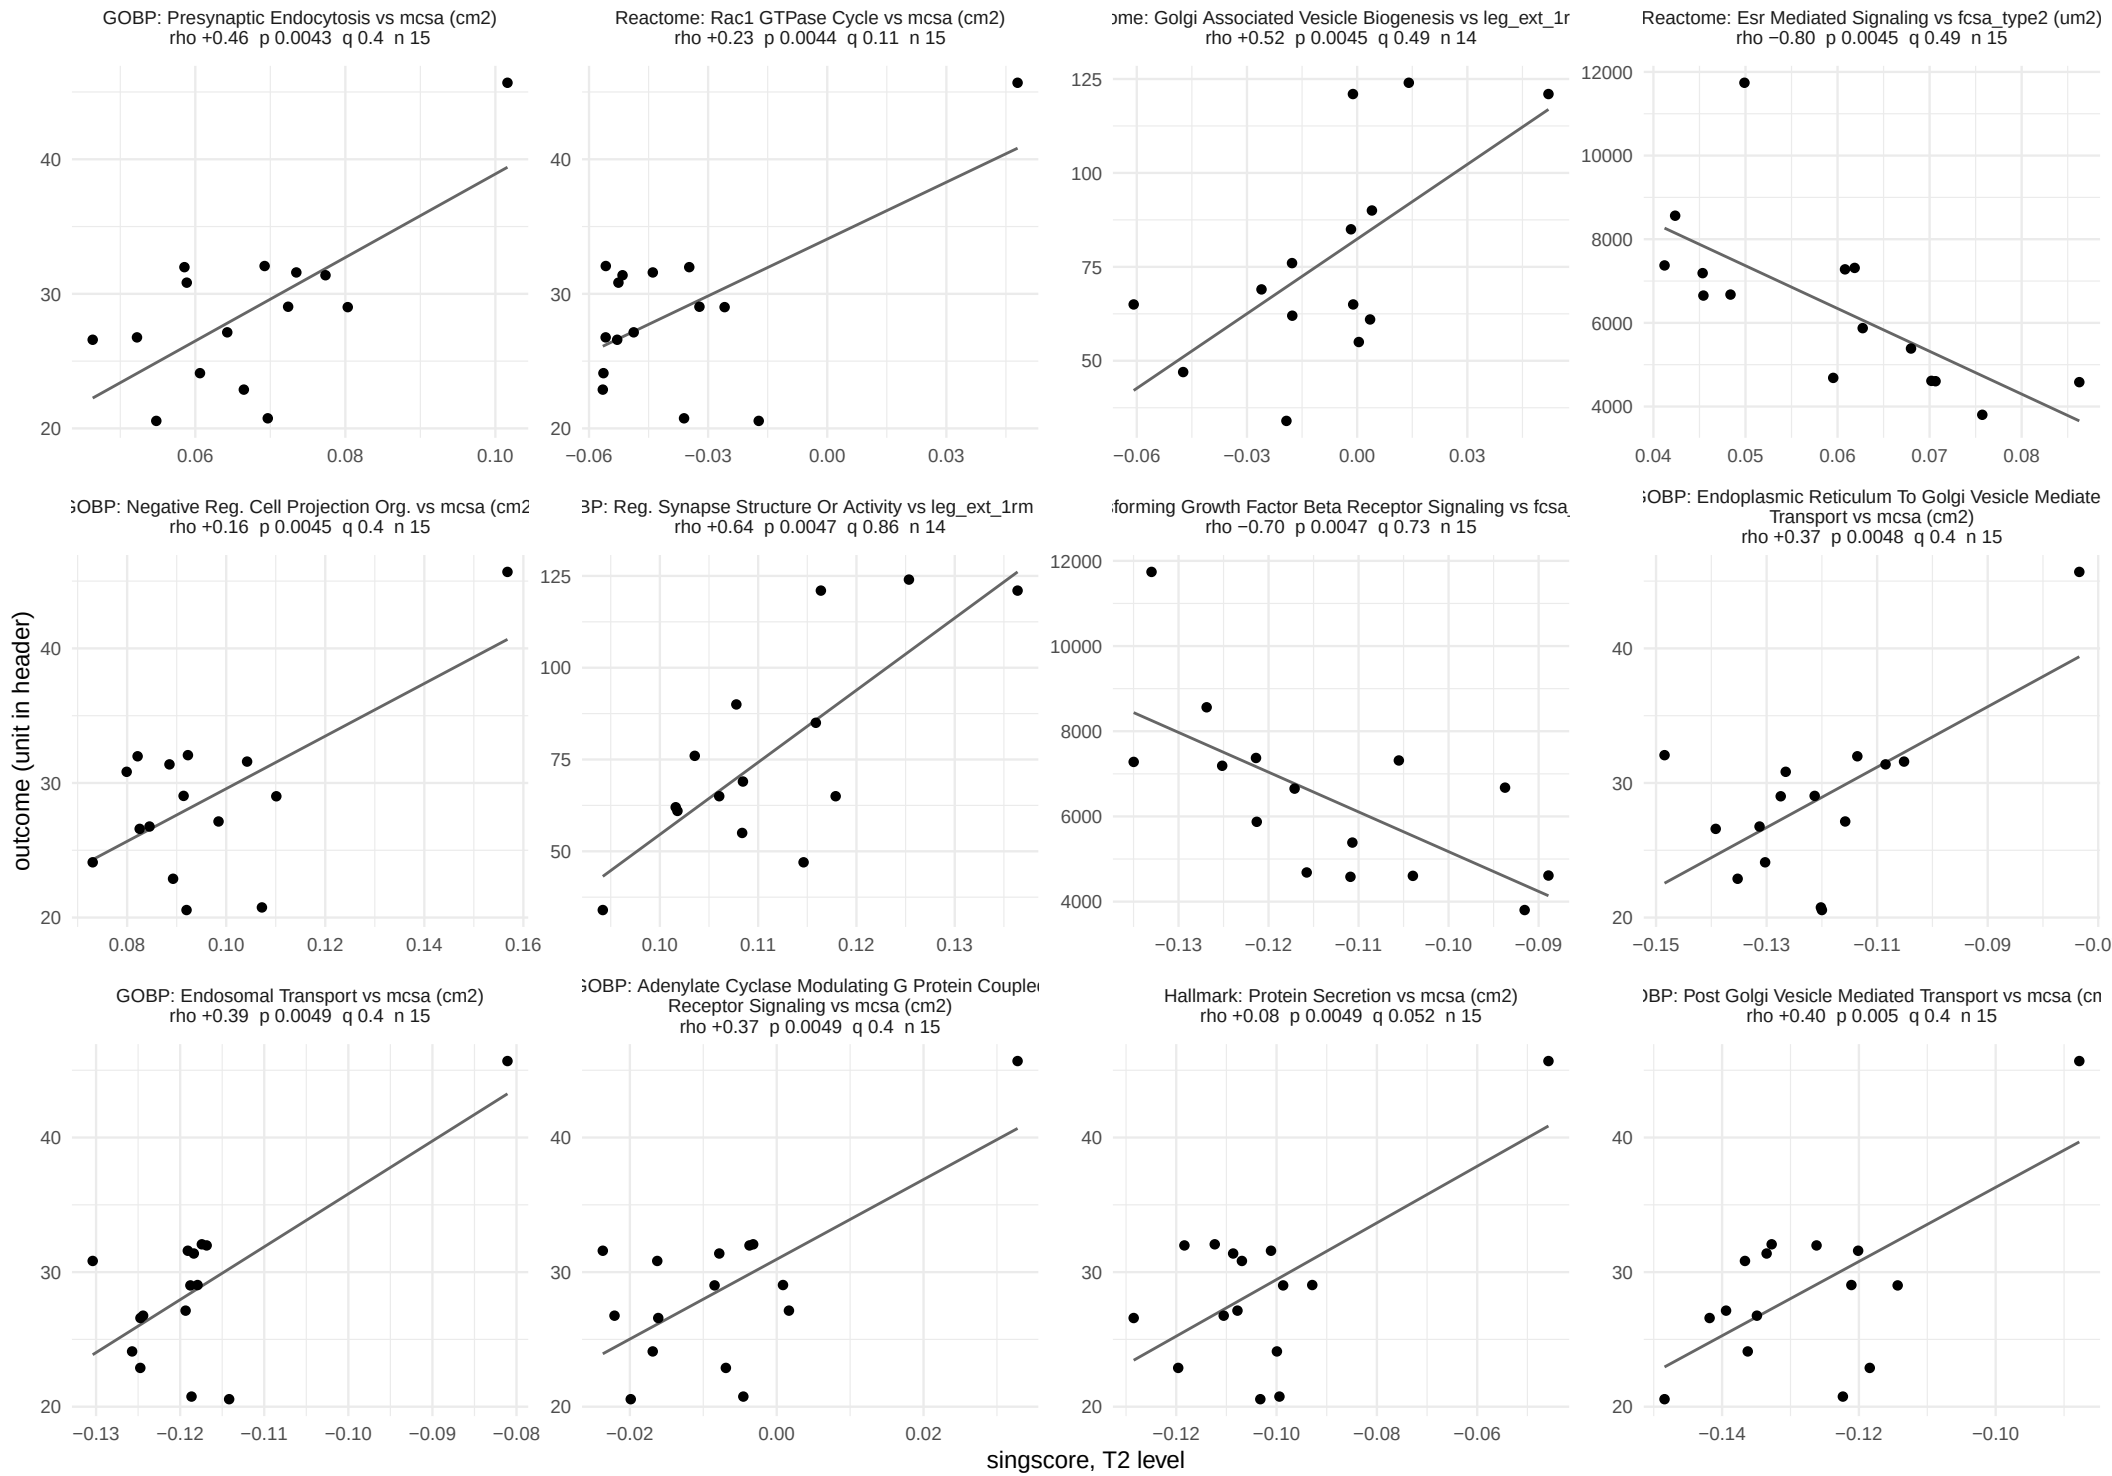

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, post_level window


380 of 8268 feature−outcome pairs at p < 0.05, 5 at BH < 0.05. Page 5 of 32.

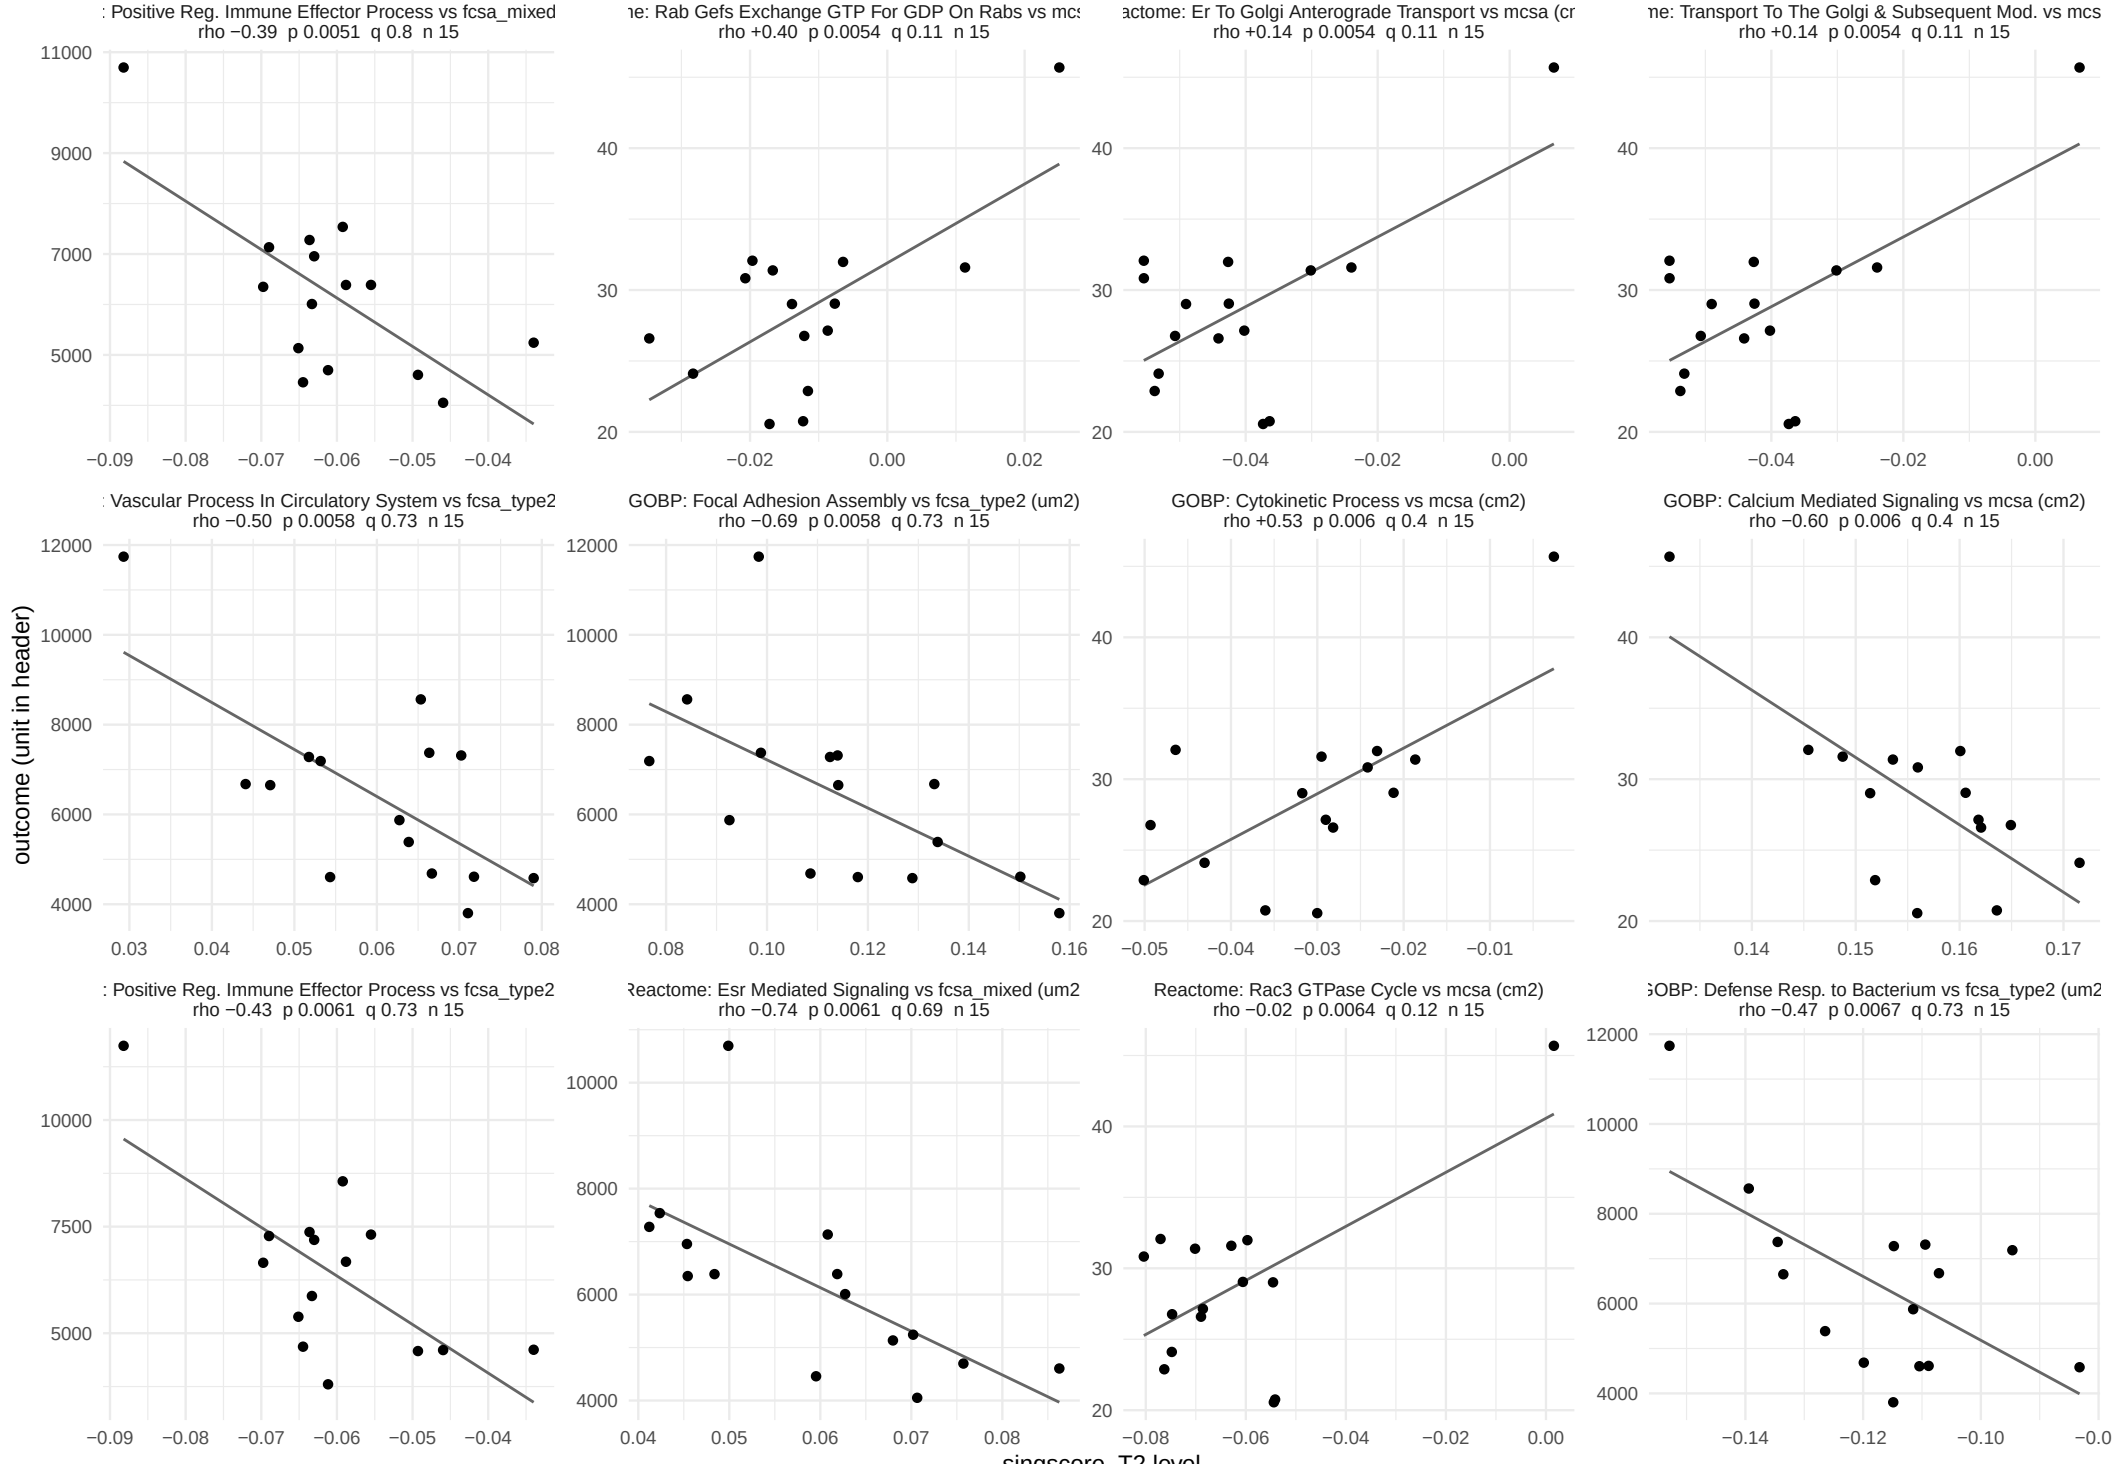

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, post_level window


380 of 8268 feature−outcome pairs at p < 0.05, 5 at BH < 0.05. Page 6 of 32.

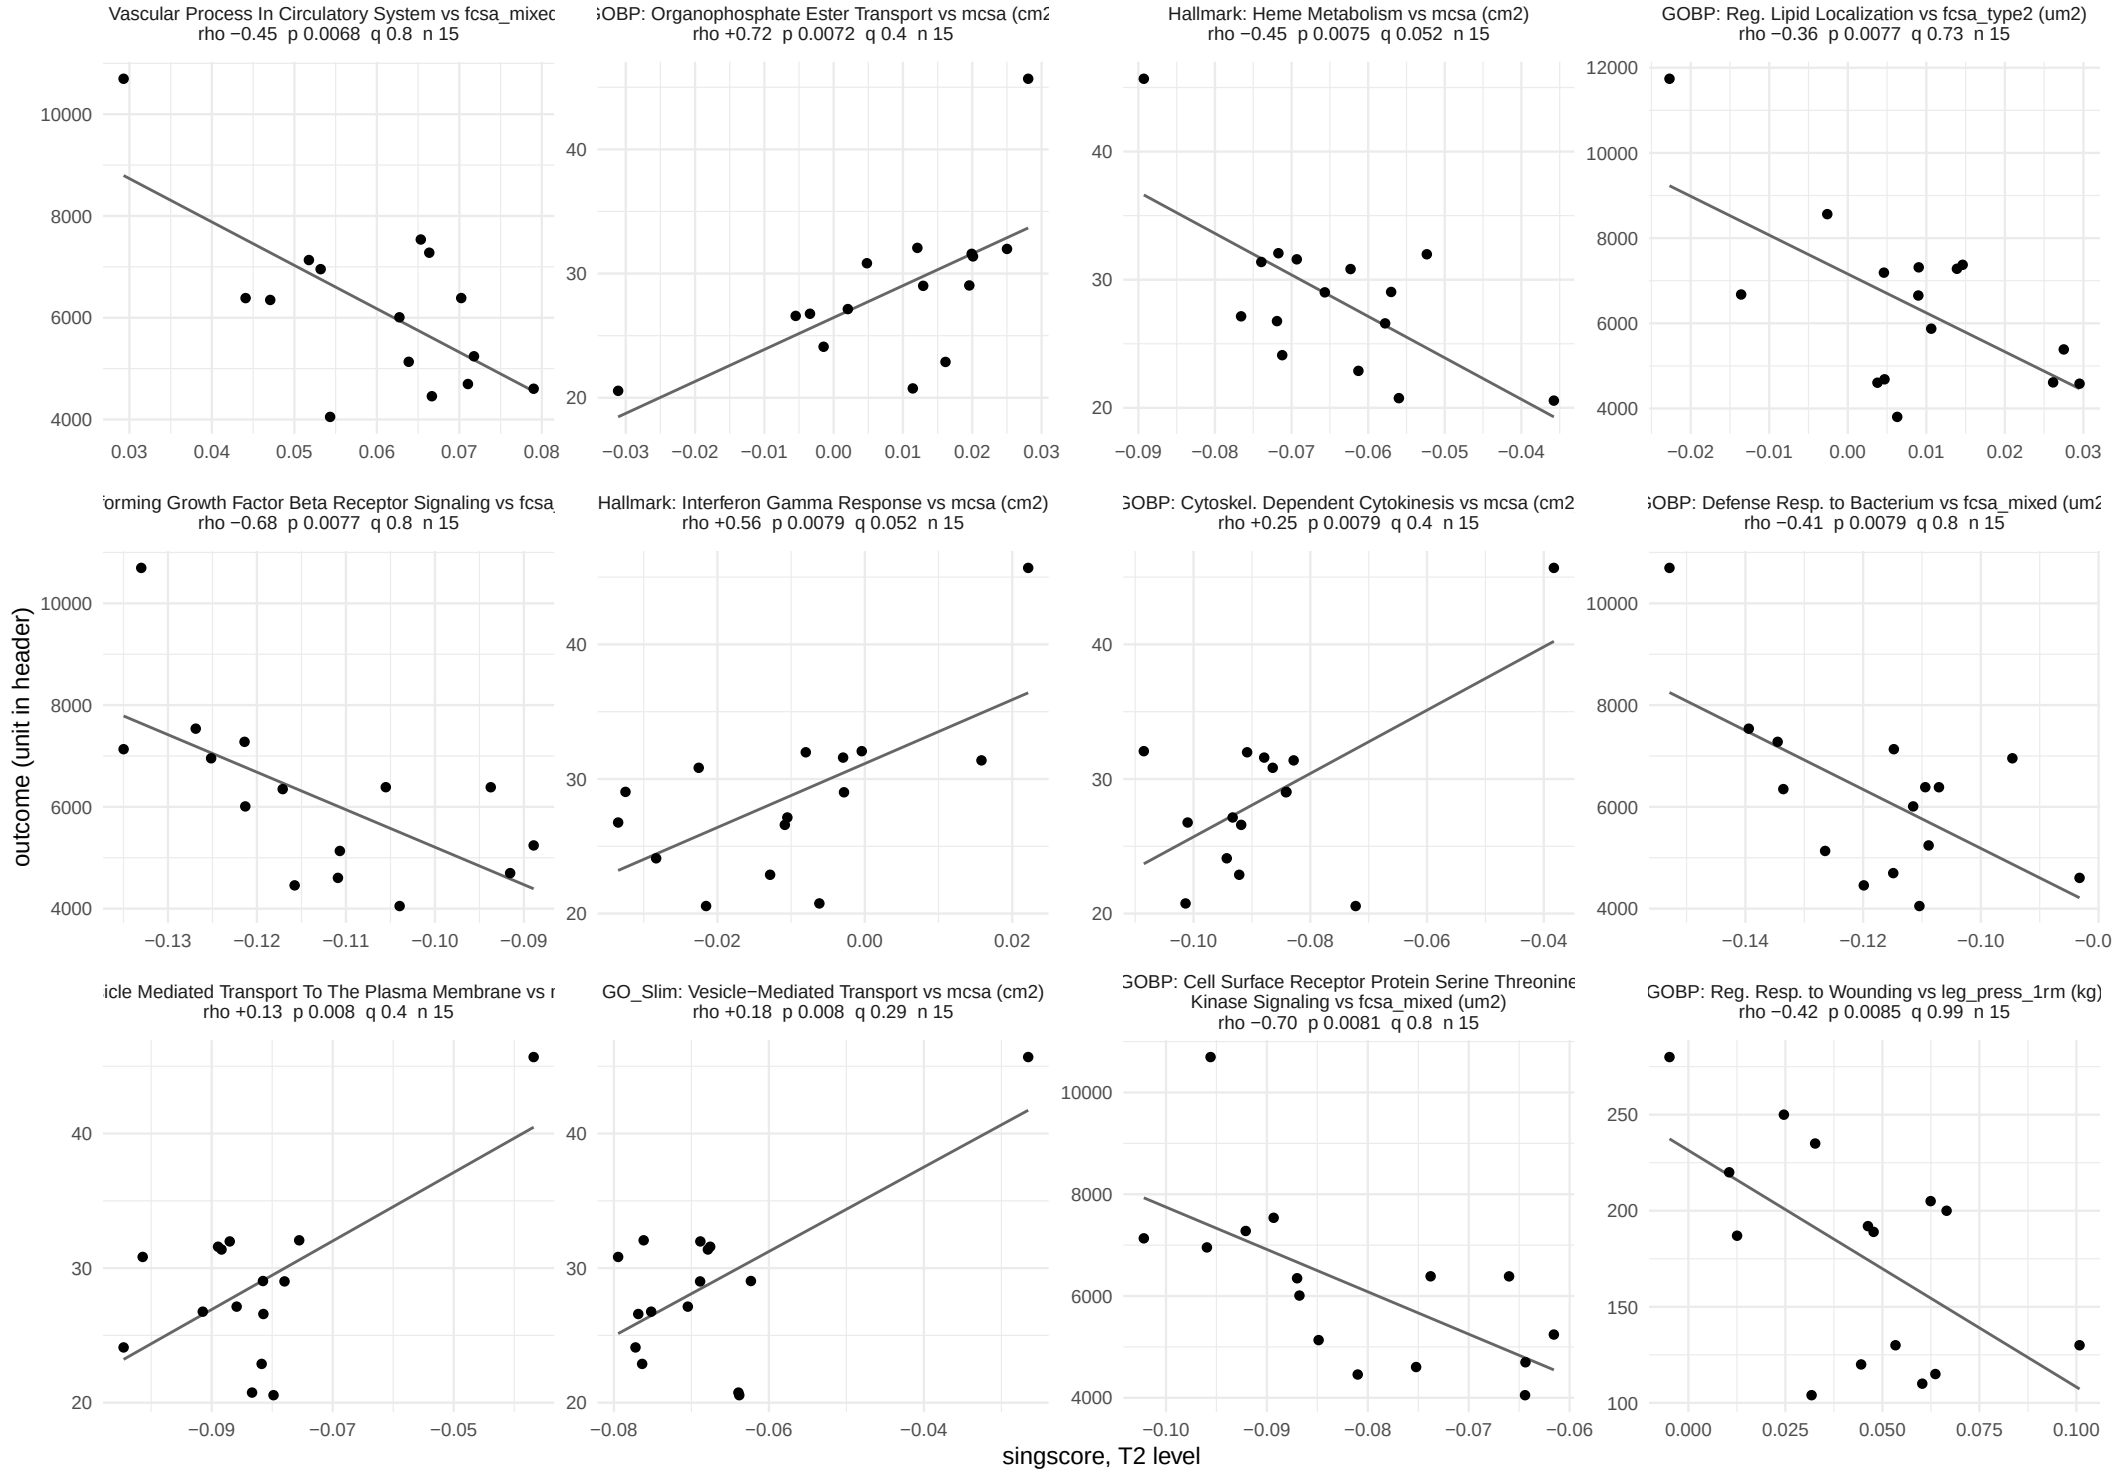

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, post_level window


380 of 8268 feature−outcome pairs at p < 0.05, 5 at BH < 0.05. Page 7 of 32.

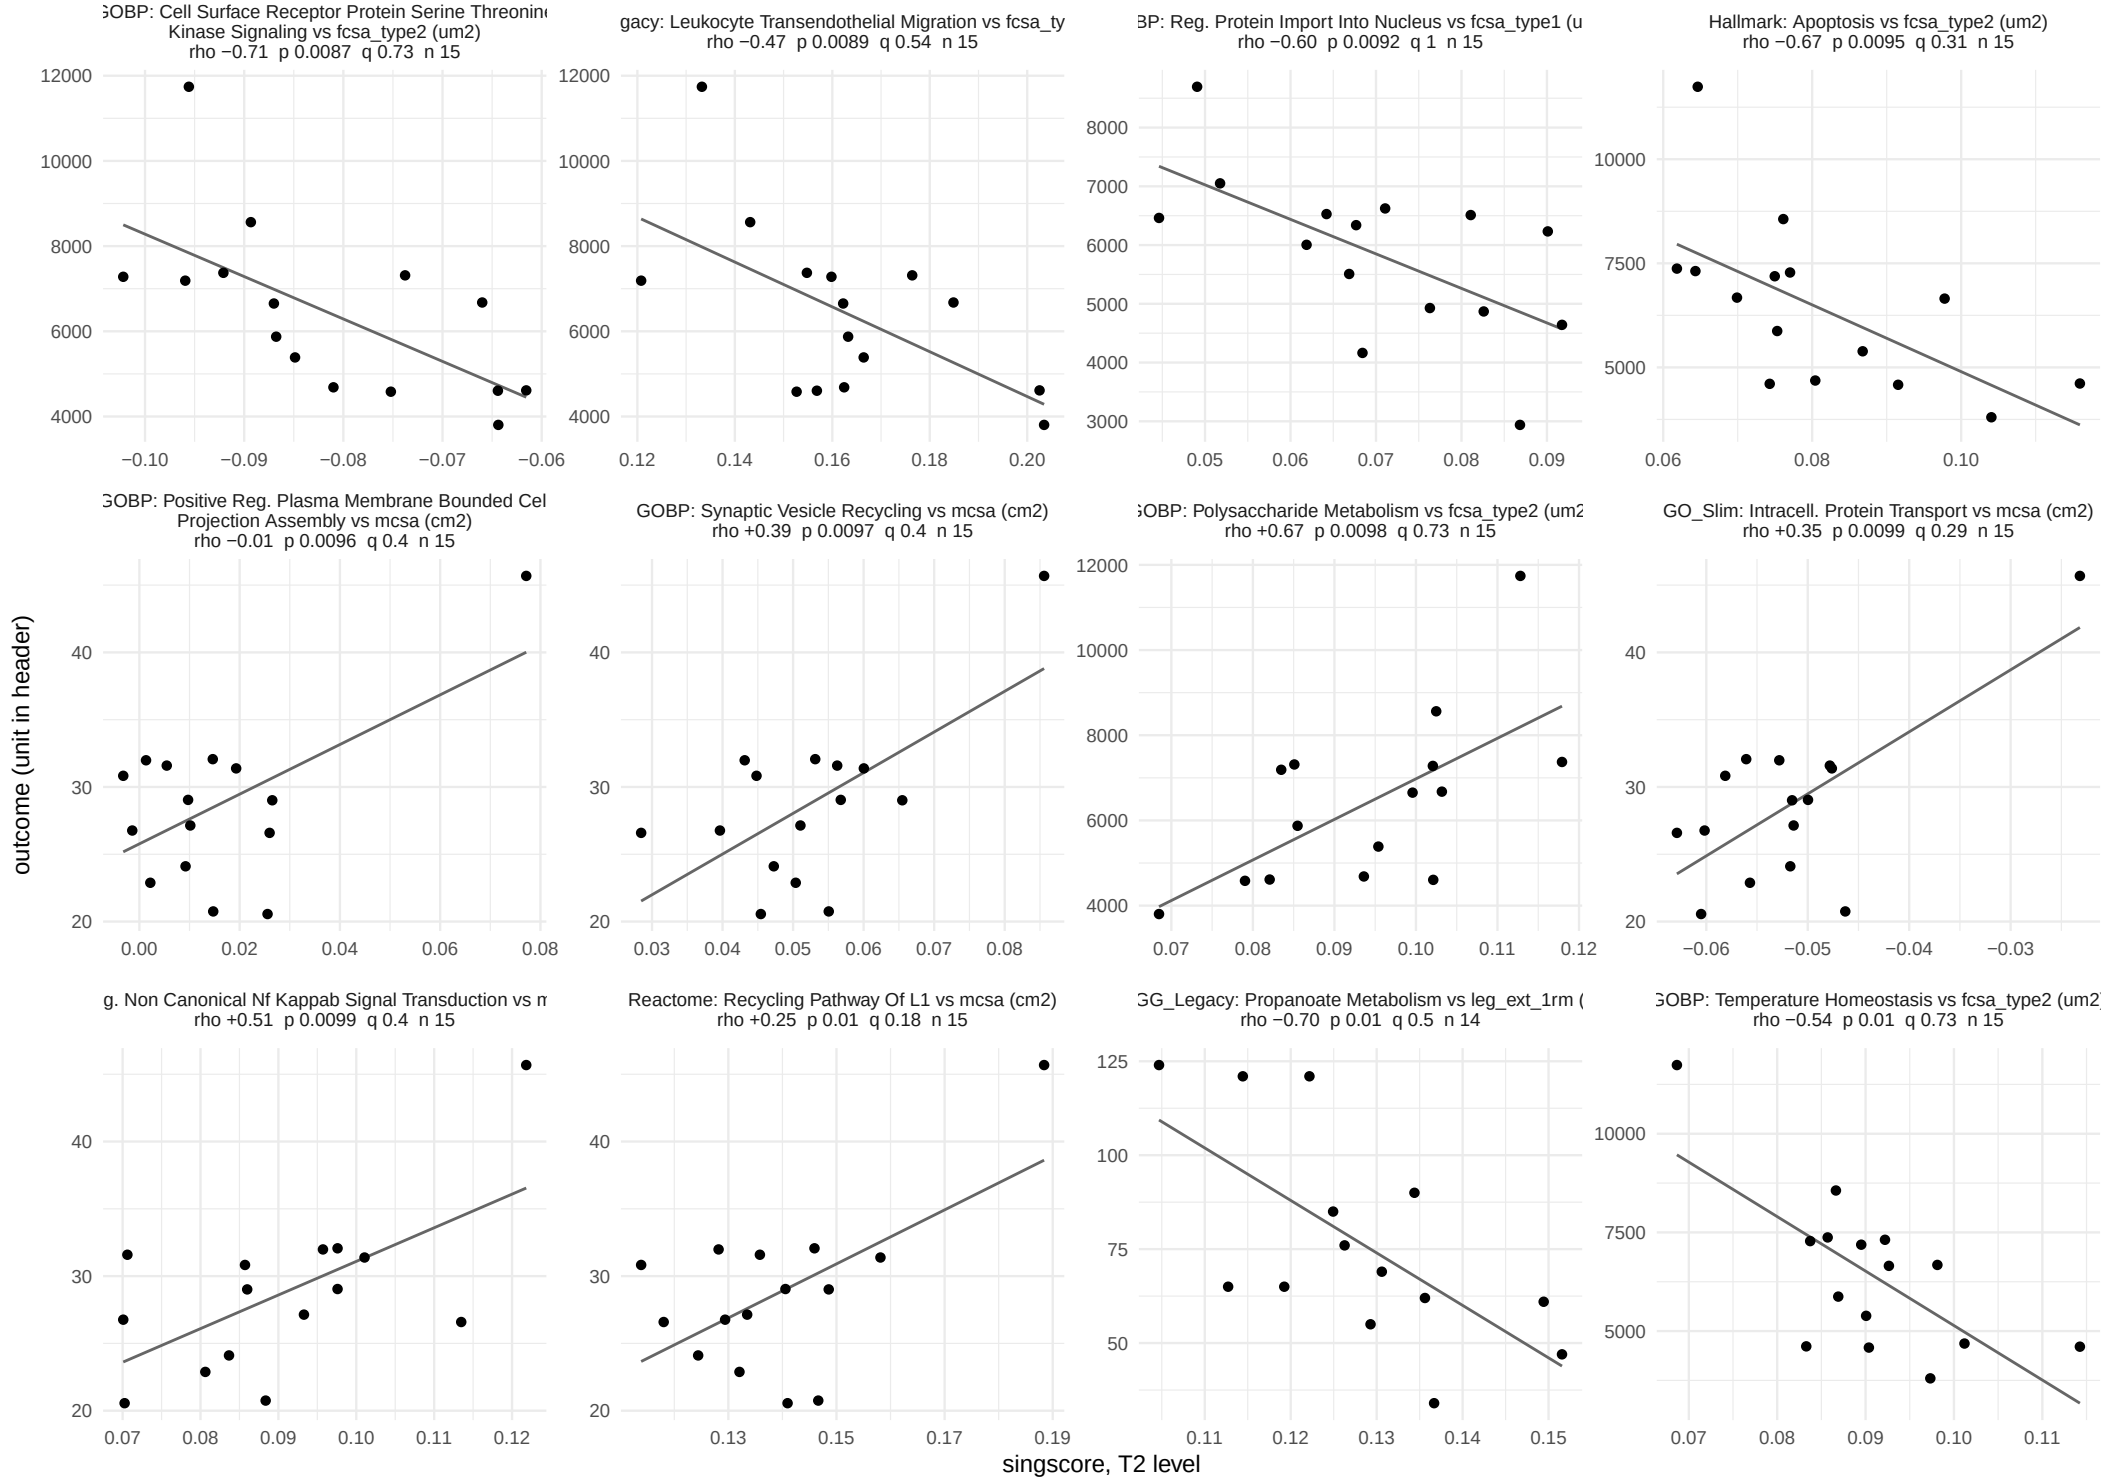

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, post_level window


380 of 8268 feature−outcome pairs at p < 0.05, 5 at BH < 0.05. Page 8 of 32.

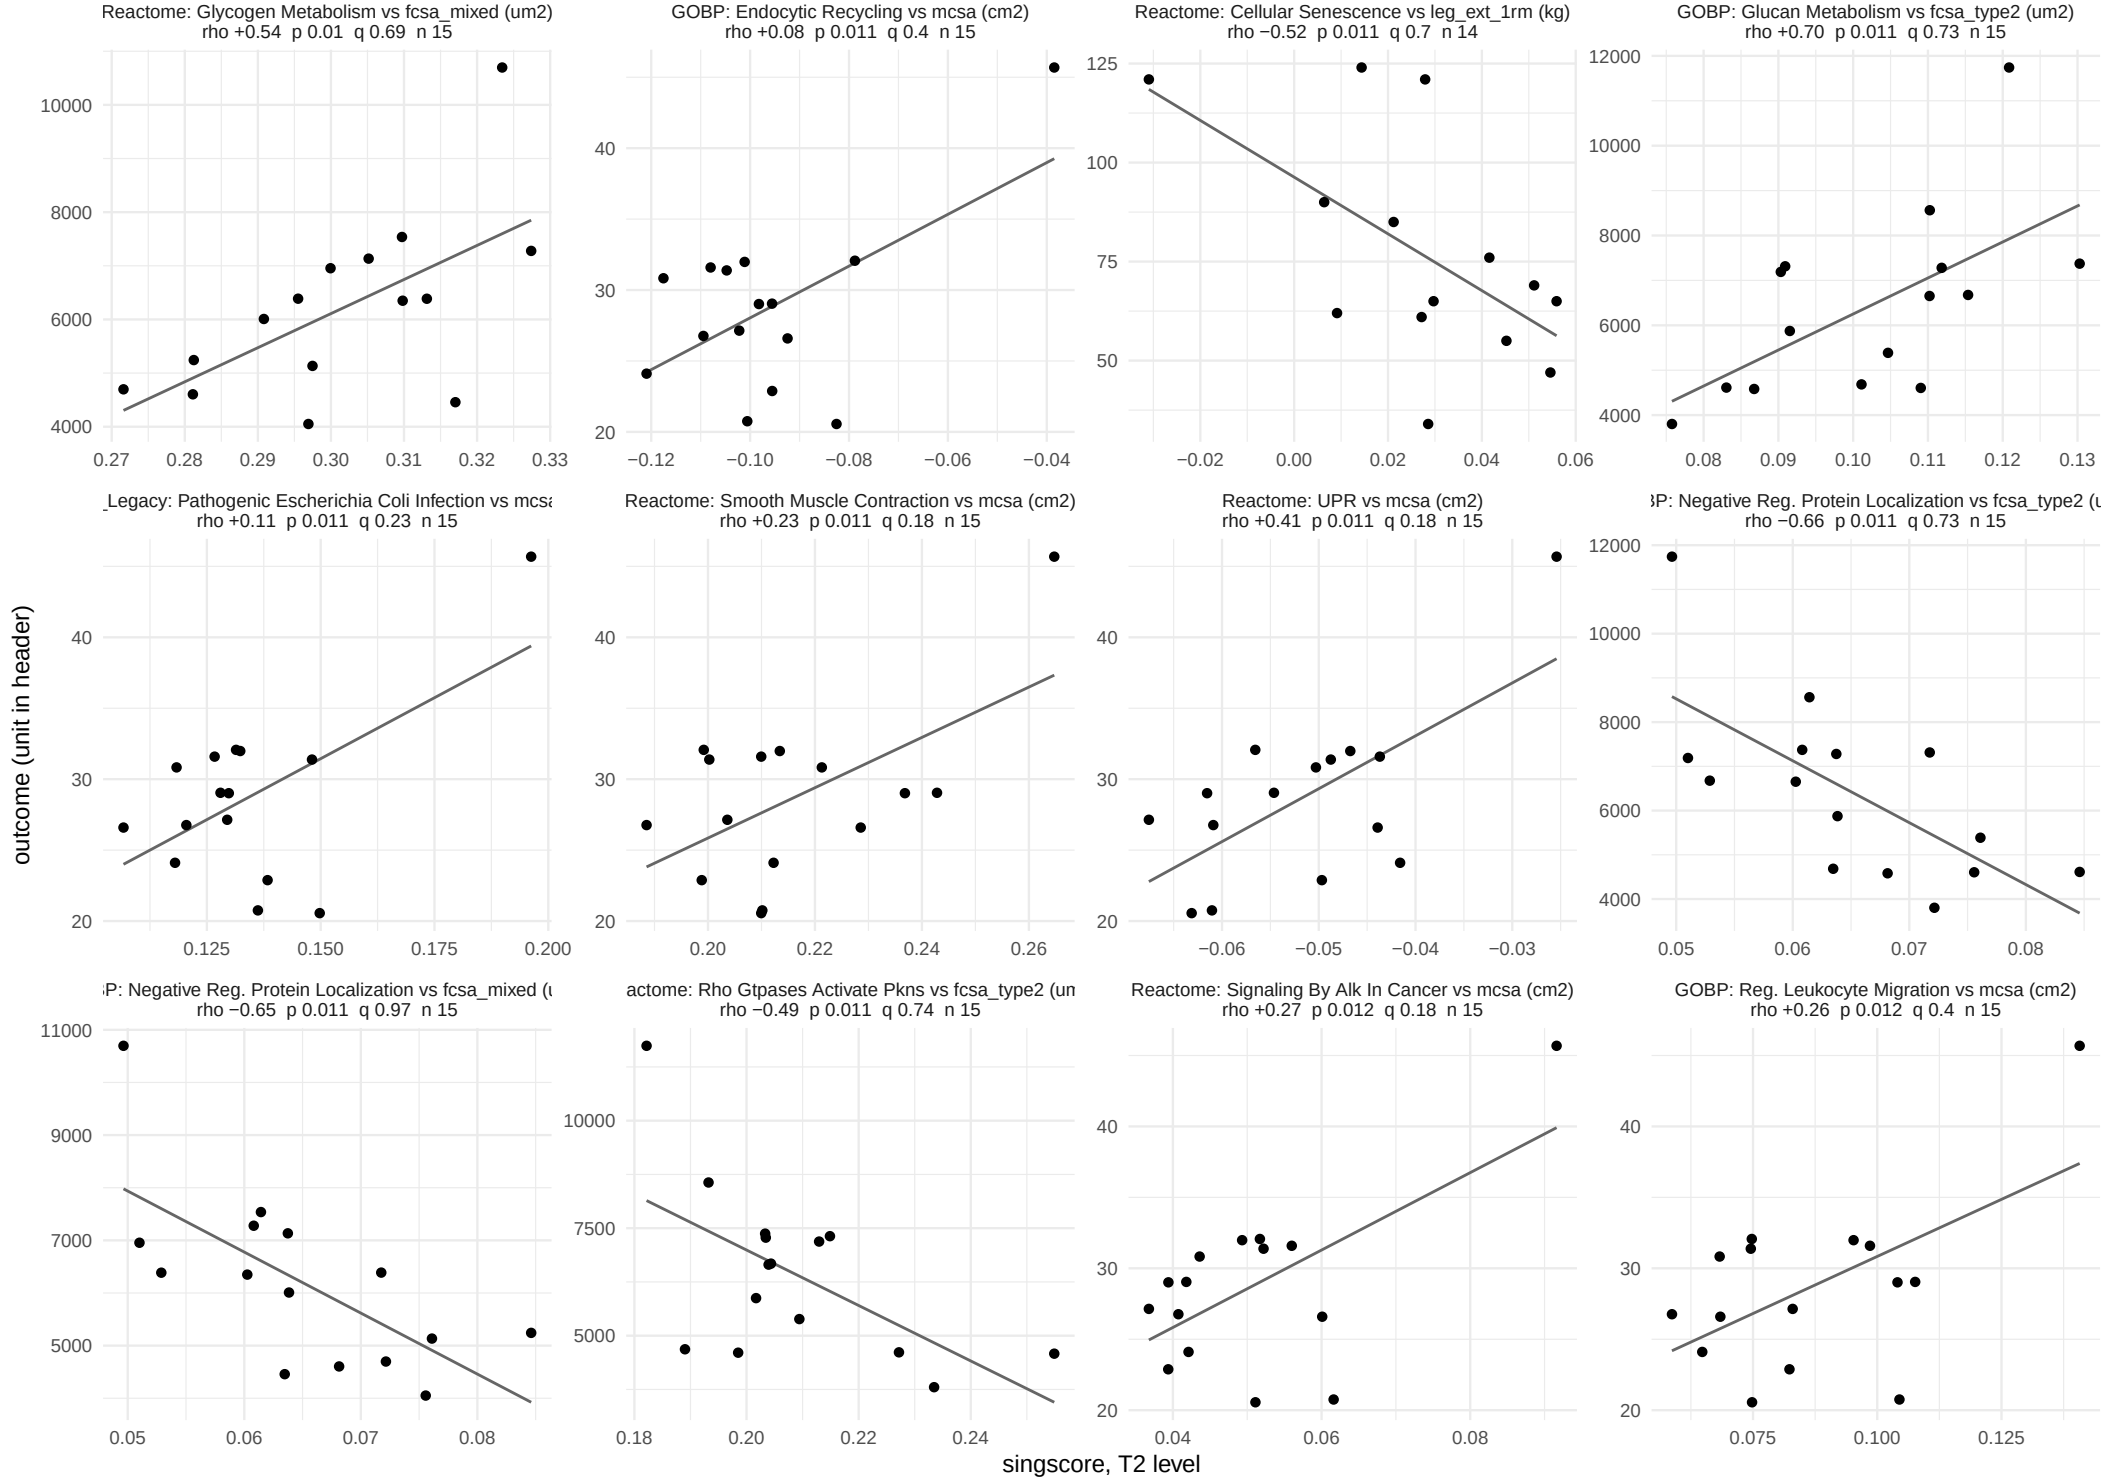

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, post_level window


380 of 8268 feature−outcome pairs at p < 0.05, 5 at BH < 0.05. Page 9 of 32.

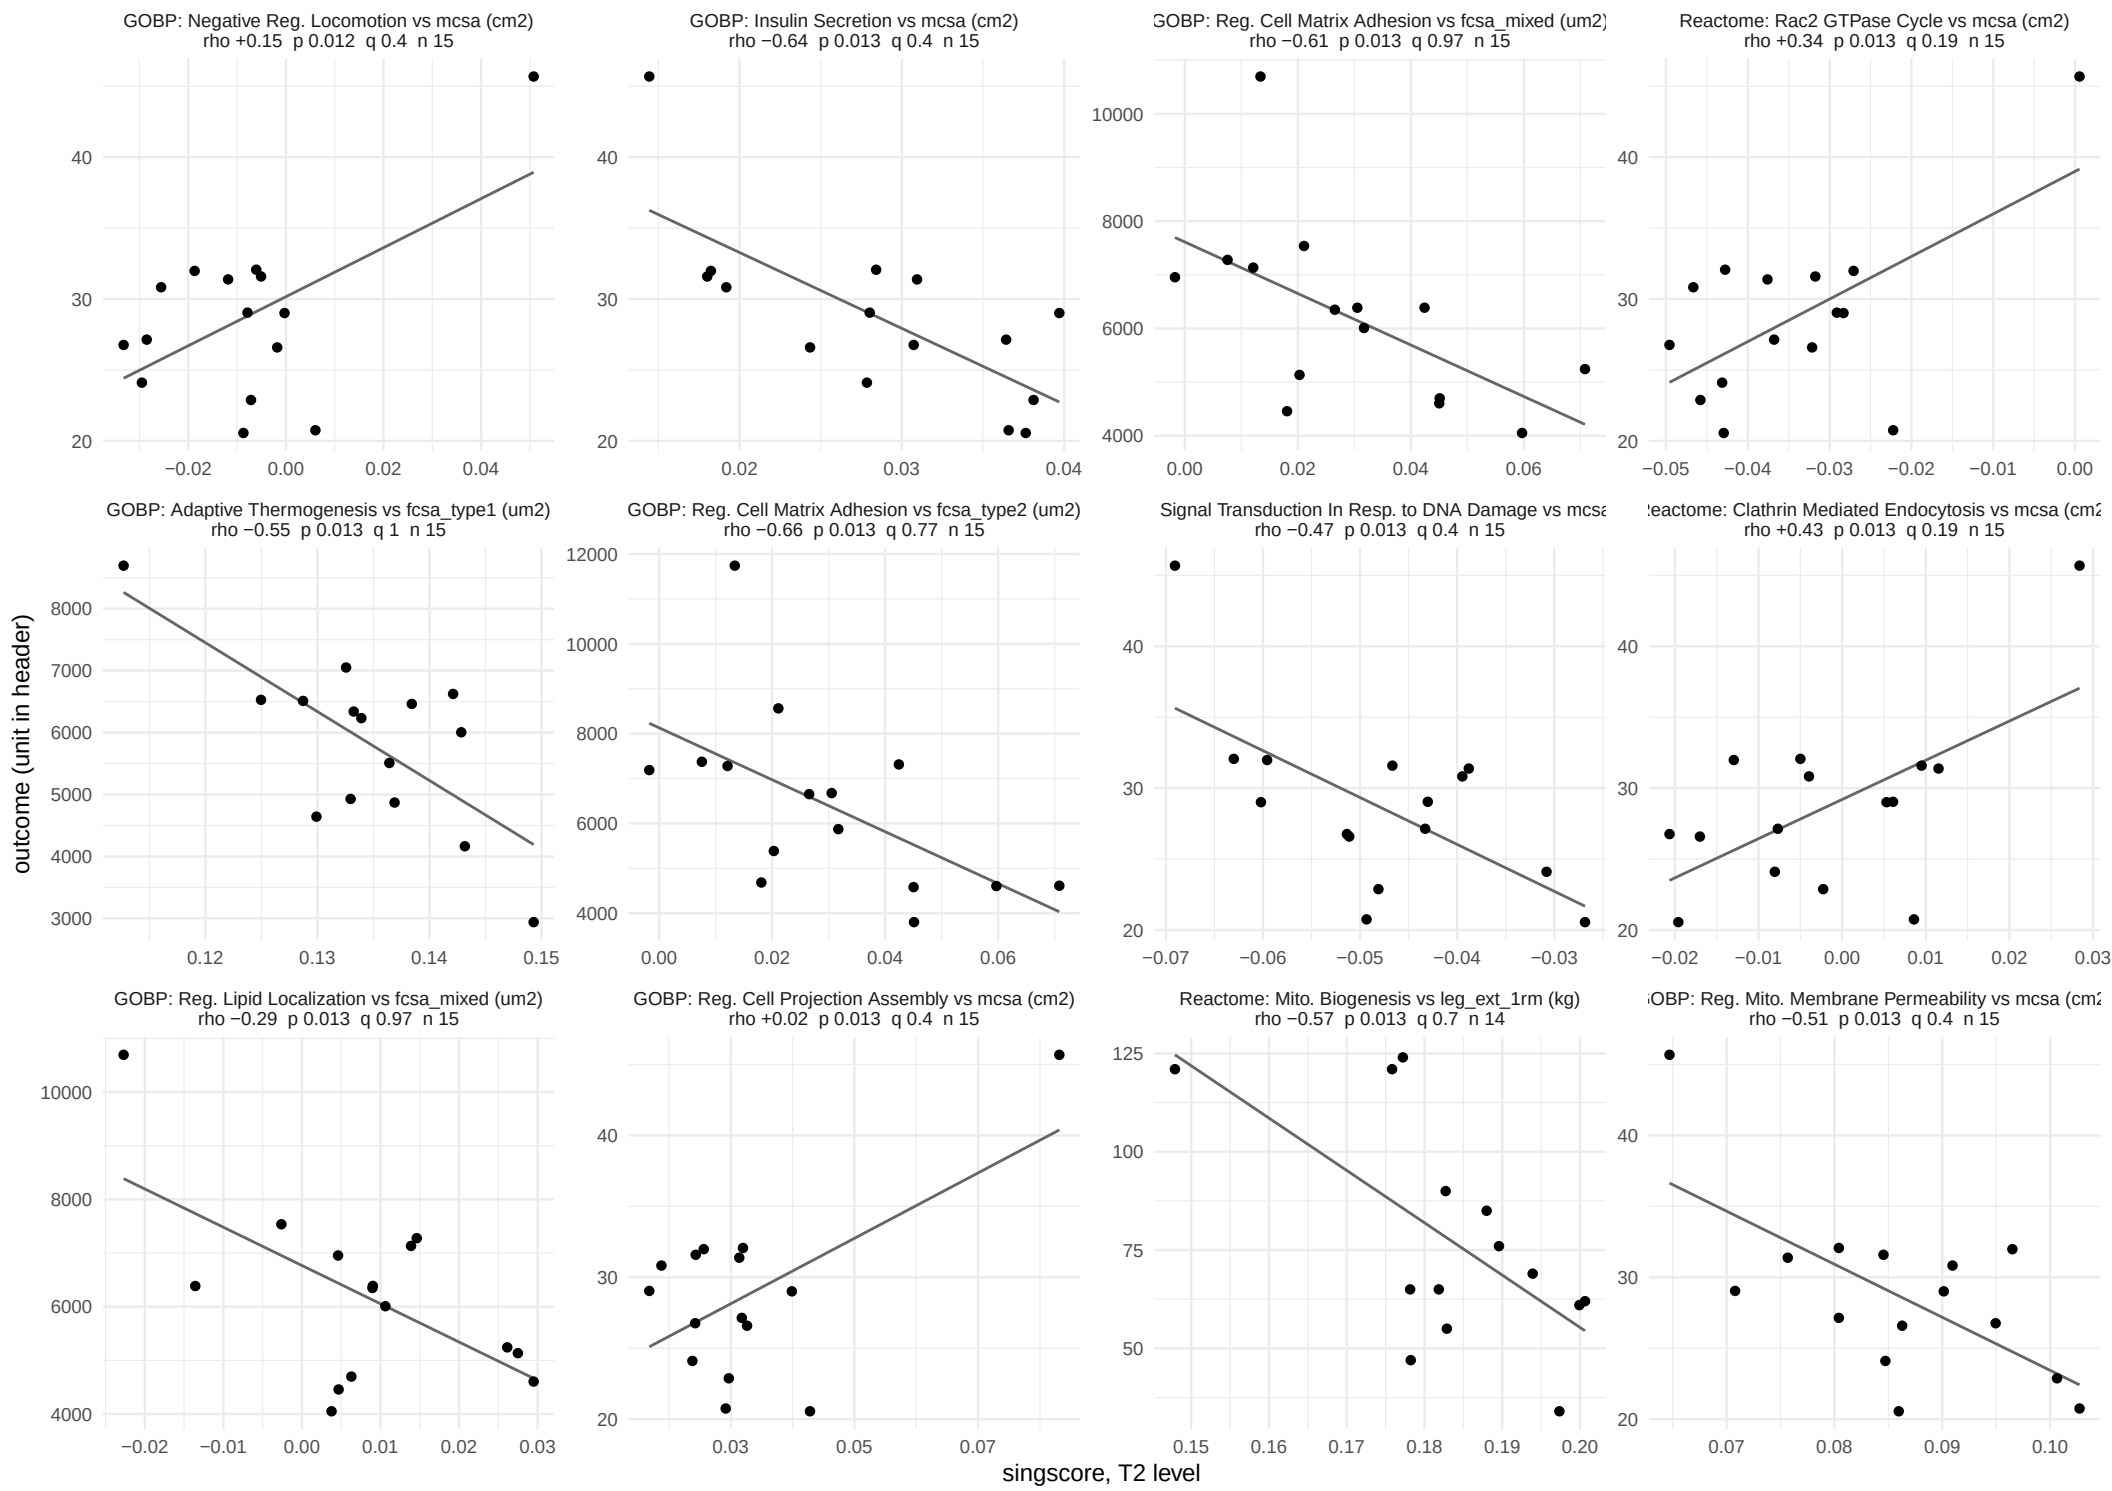

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, post_level window


380 of 8268 feature−outcome pairs at p < 0.05, 5 at BH < 0.05. Page 10 of 32.

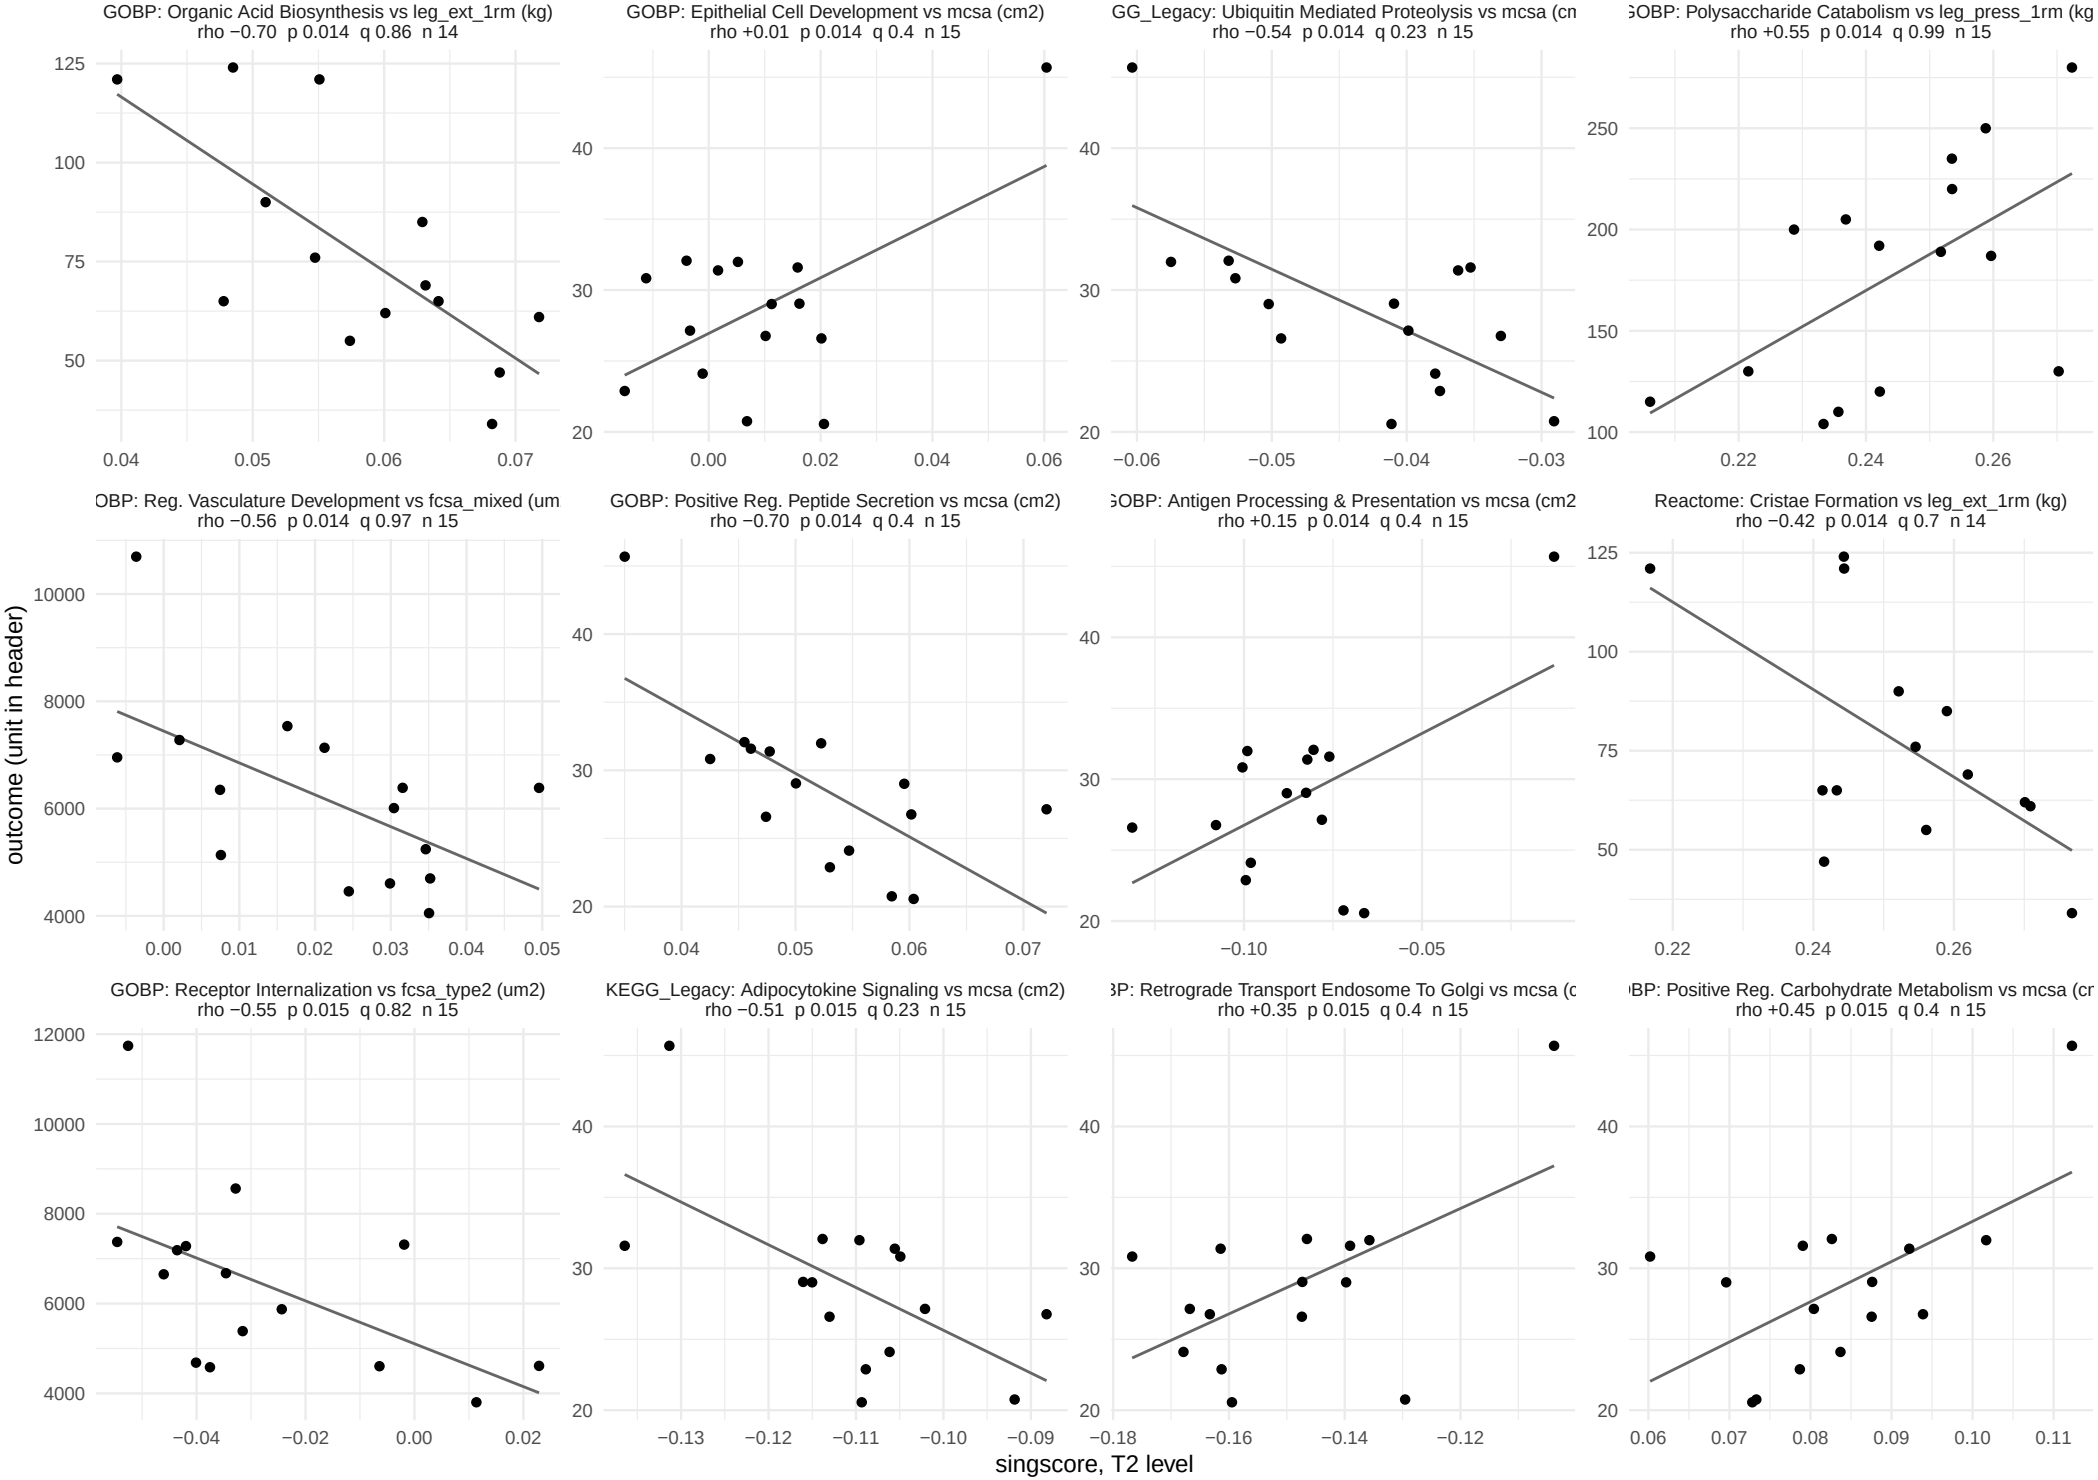

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, post_level window


380 of 8268 feature−outcome pairs at p < 0.05, 5 at BH < 0.05. Page 11 of 32.

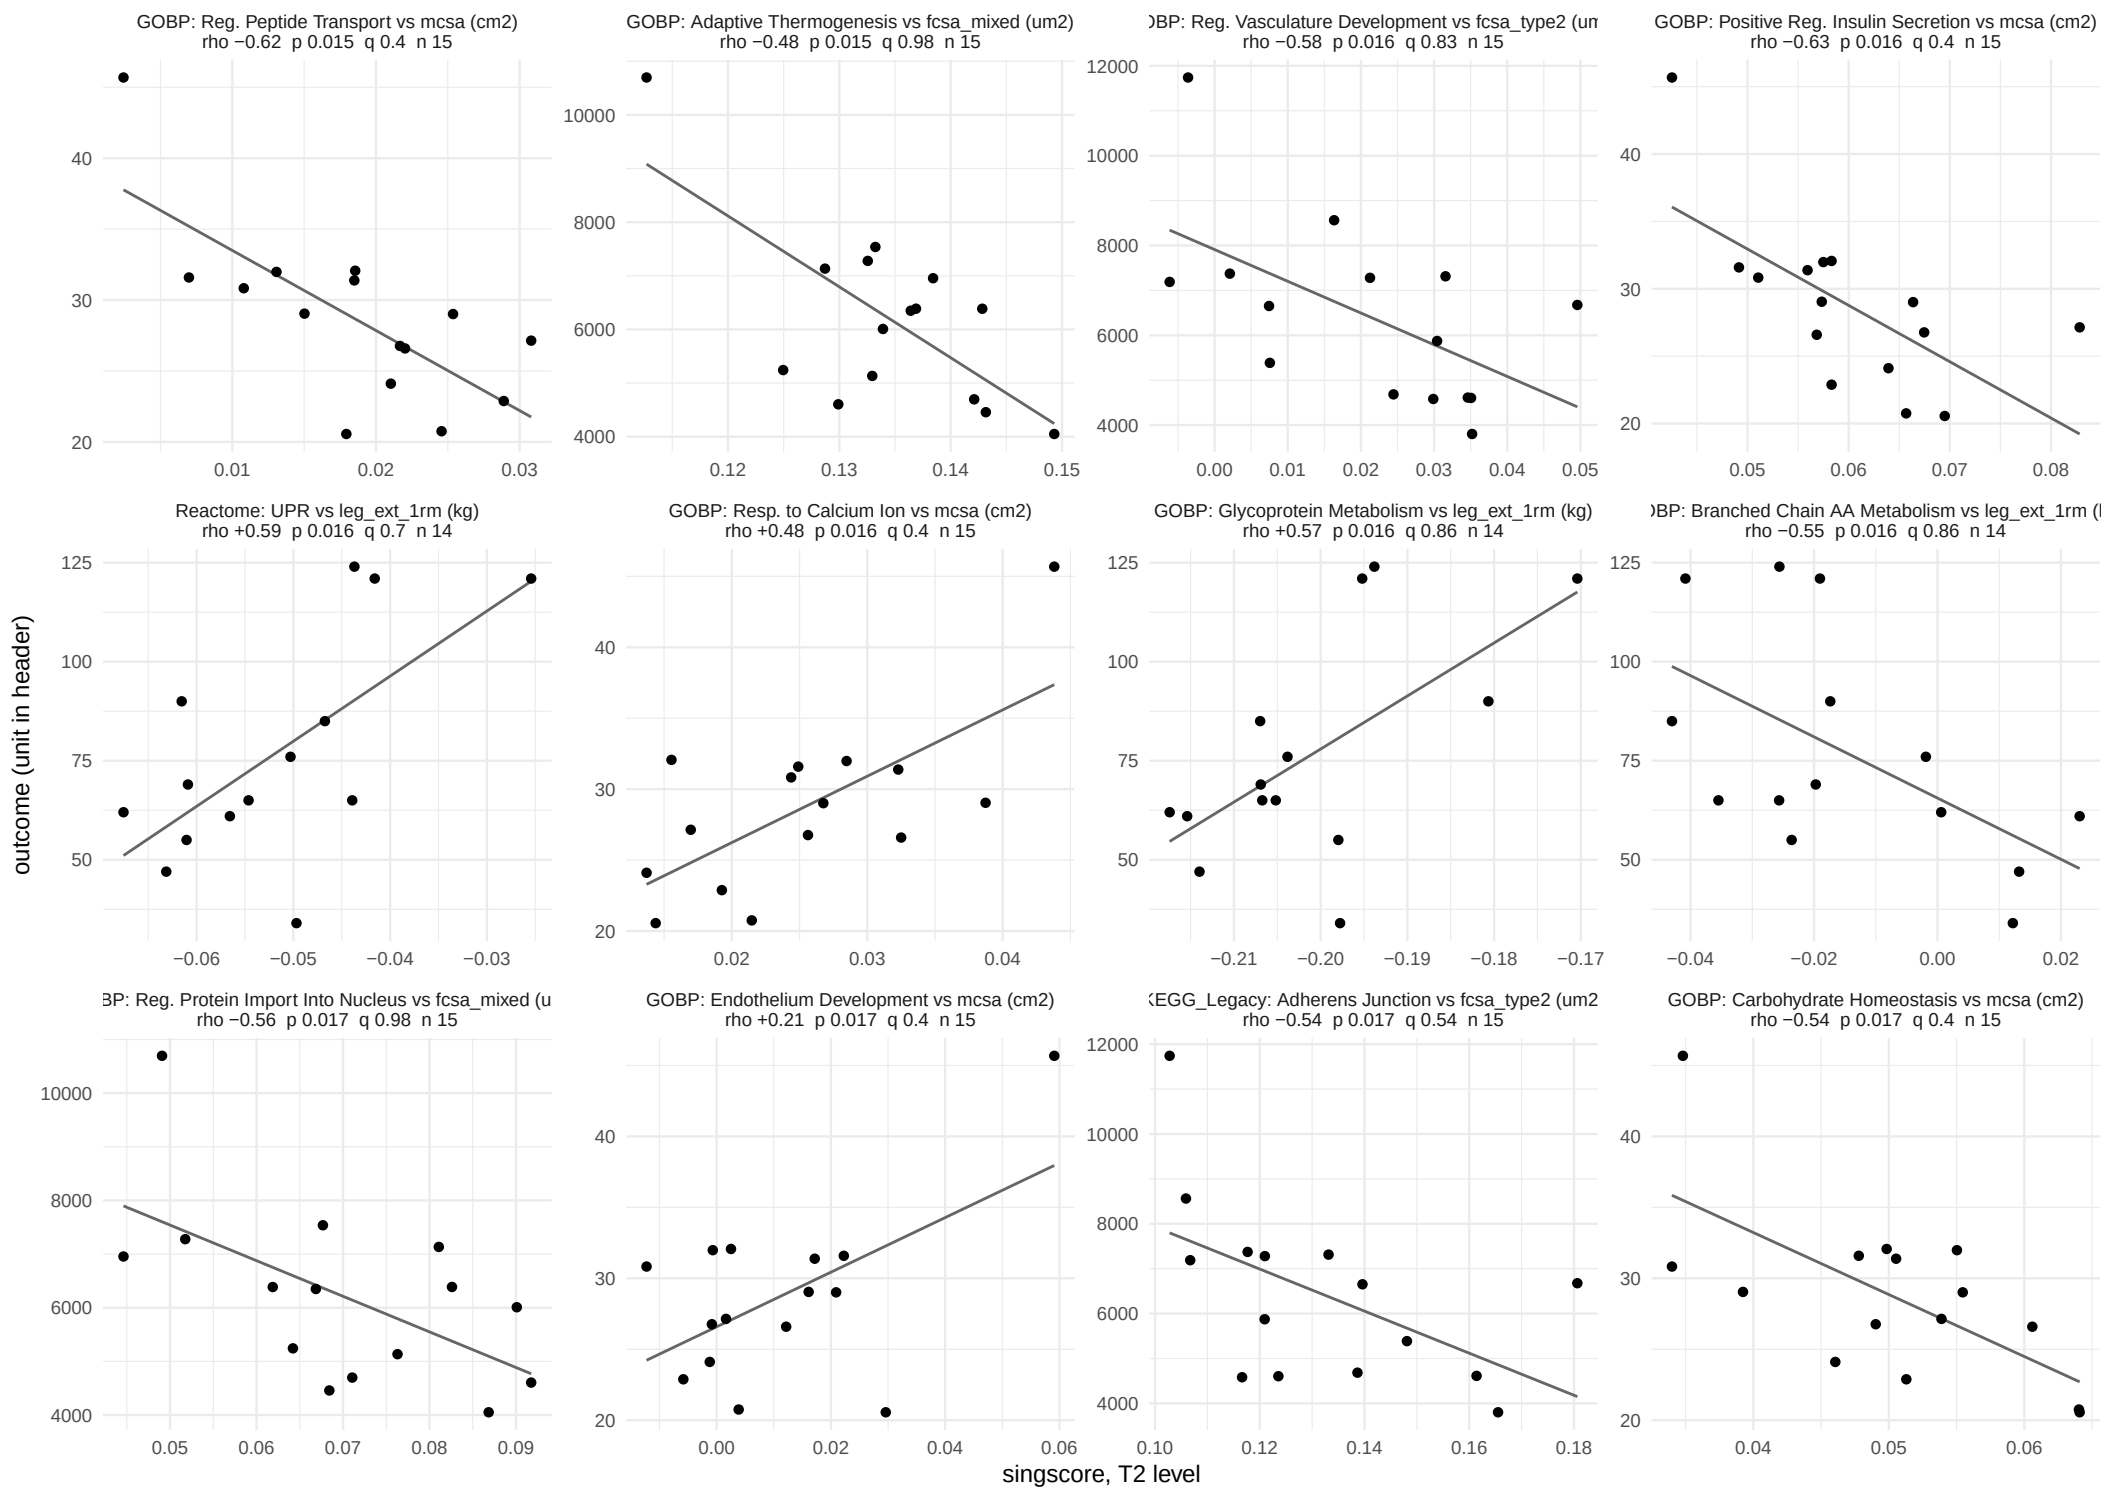

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, post_level window


380 of 8268 feature−outcome pairs at p < 0.05, 5 at BH < 0.05. Page 12 of 32.

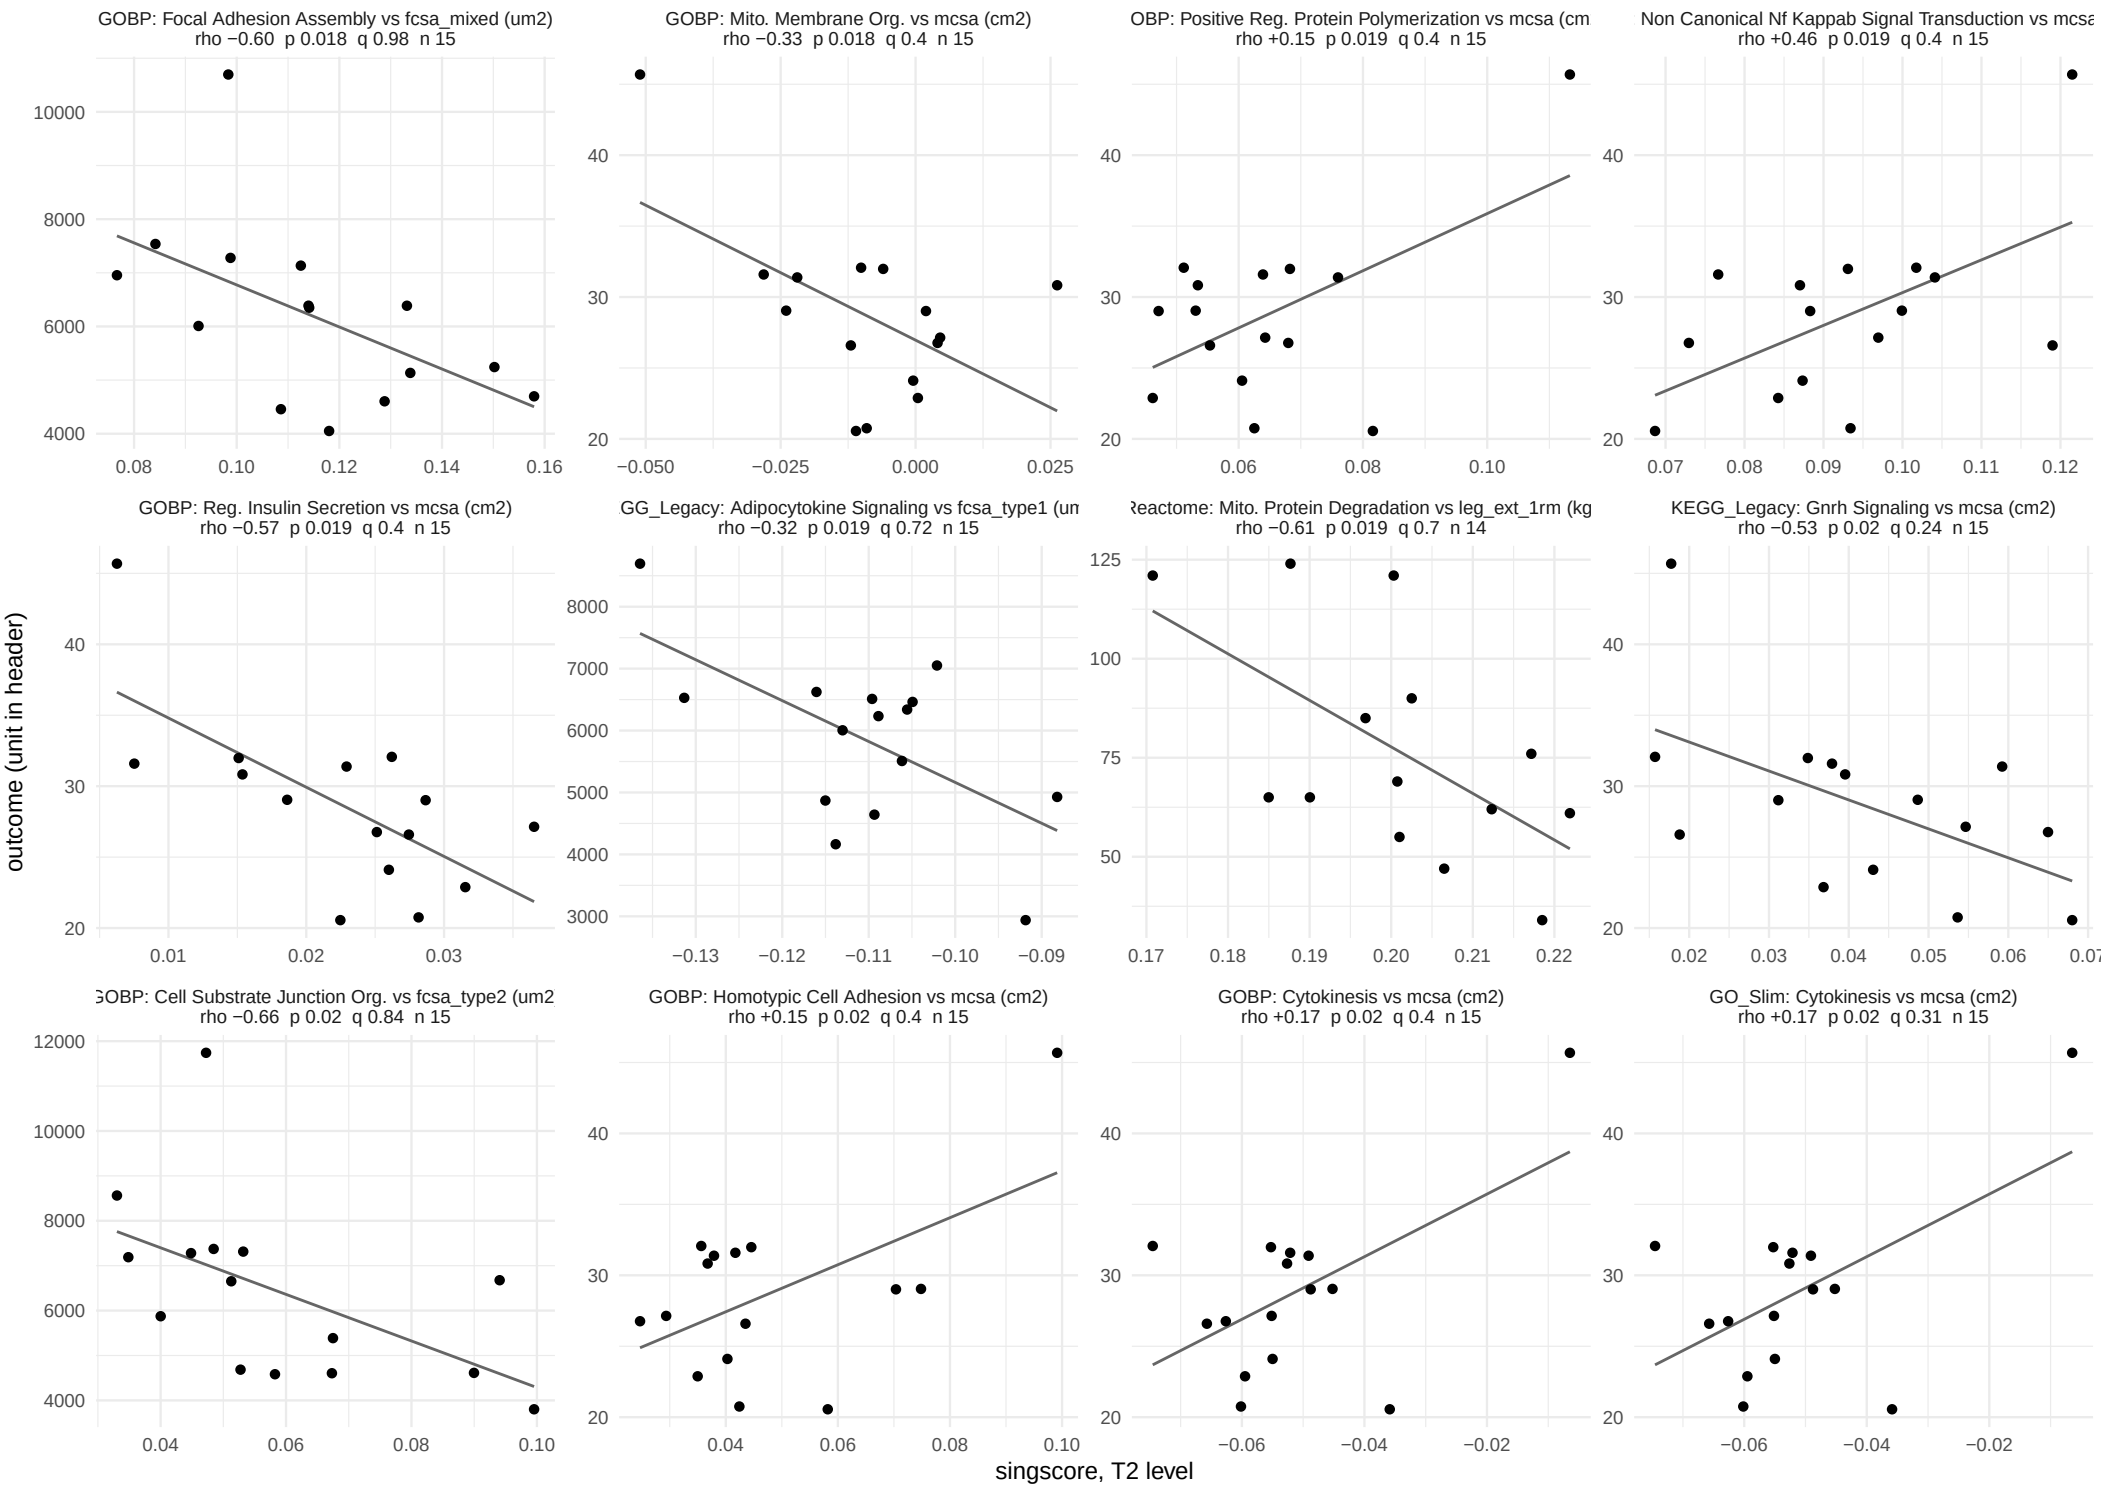

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, post_level window


380 of 8268 feature−outcome pairs at p < 0.05, 5 at BH < 0.05. Page 13 of 32.

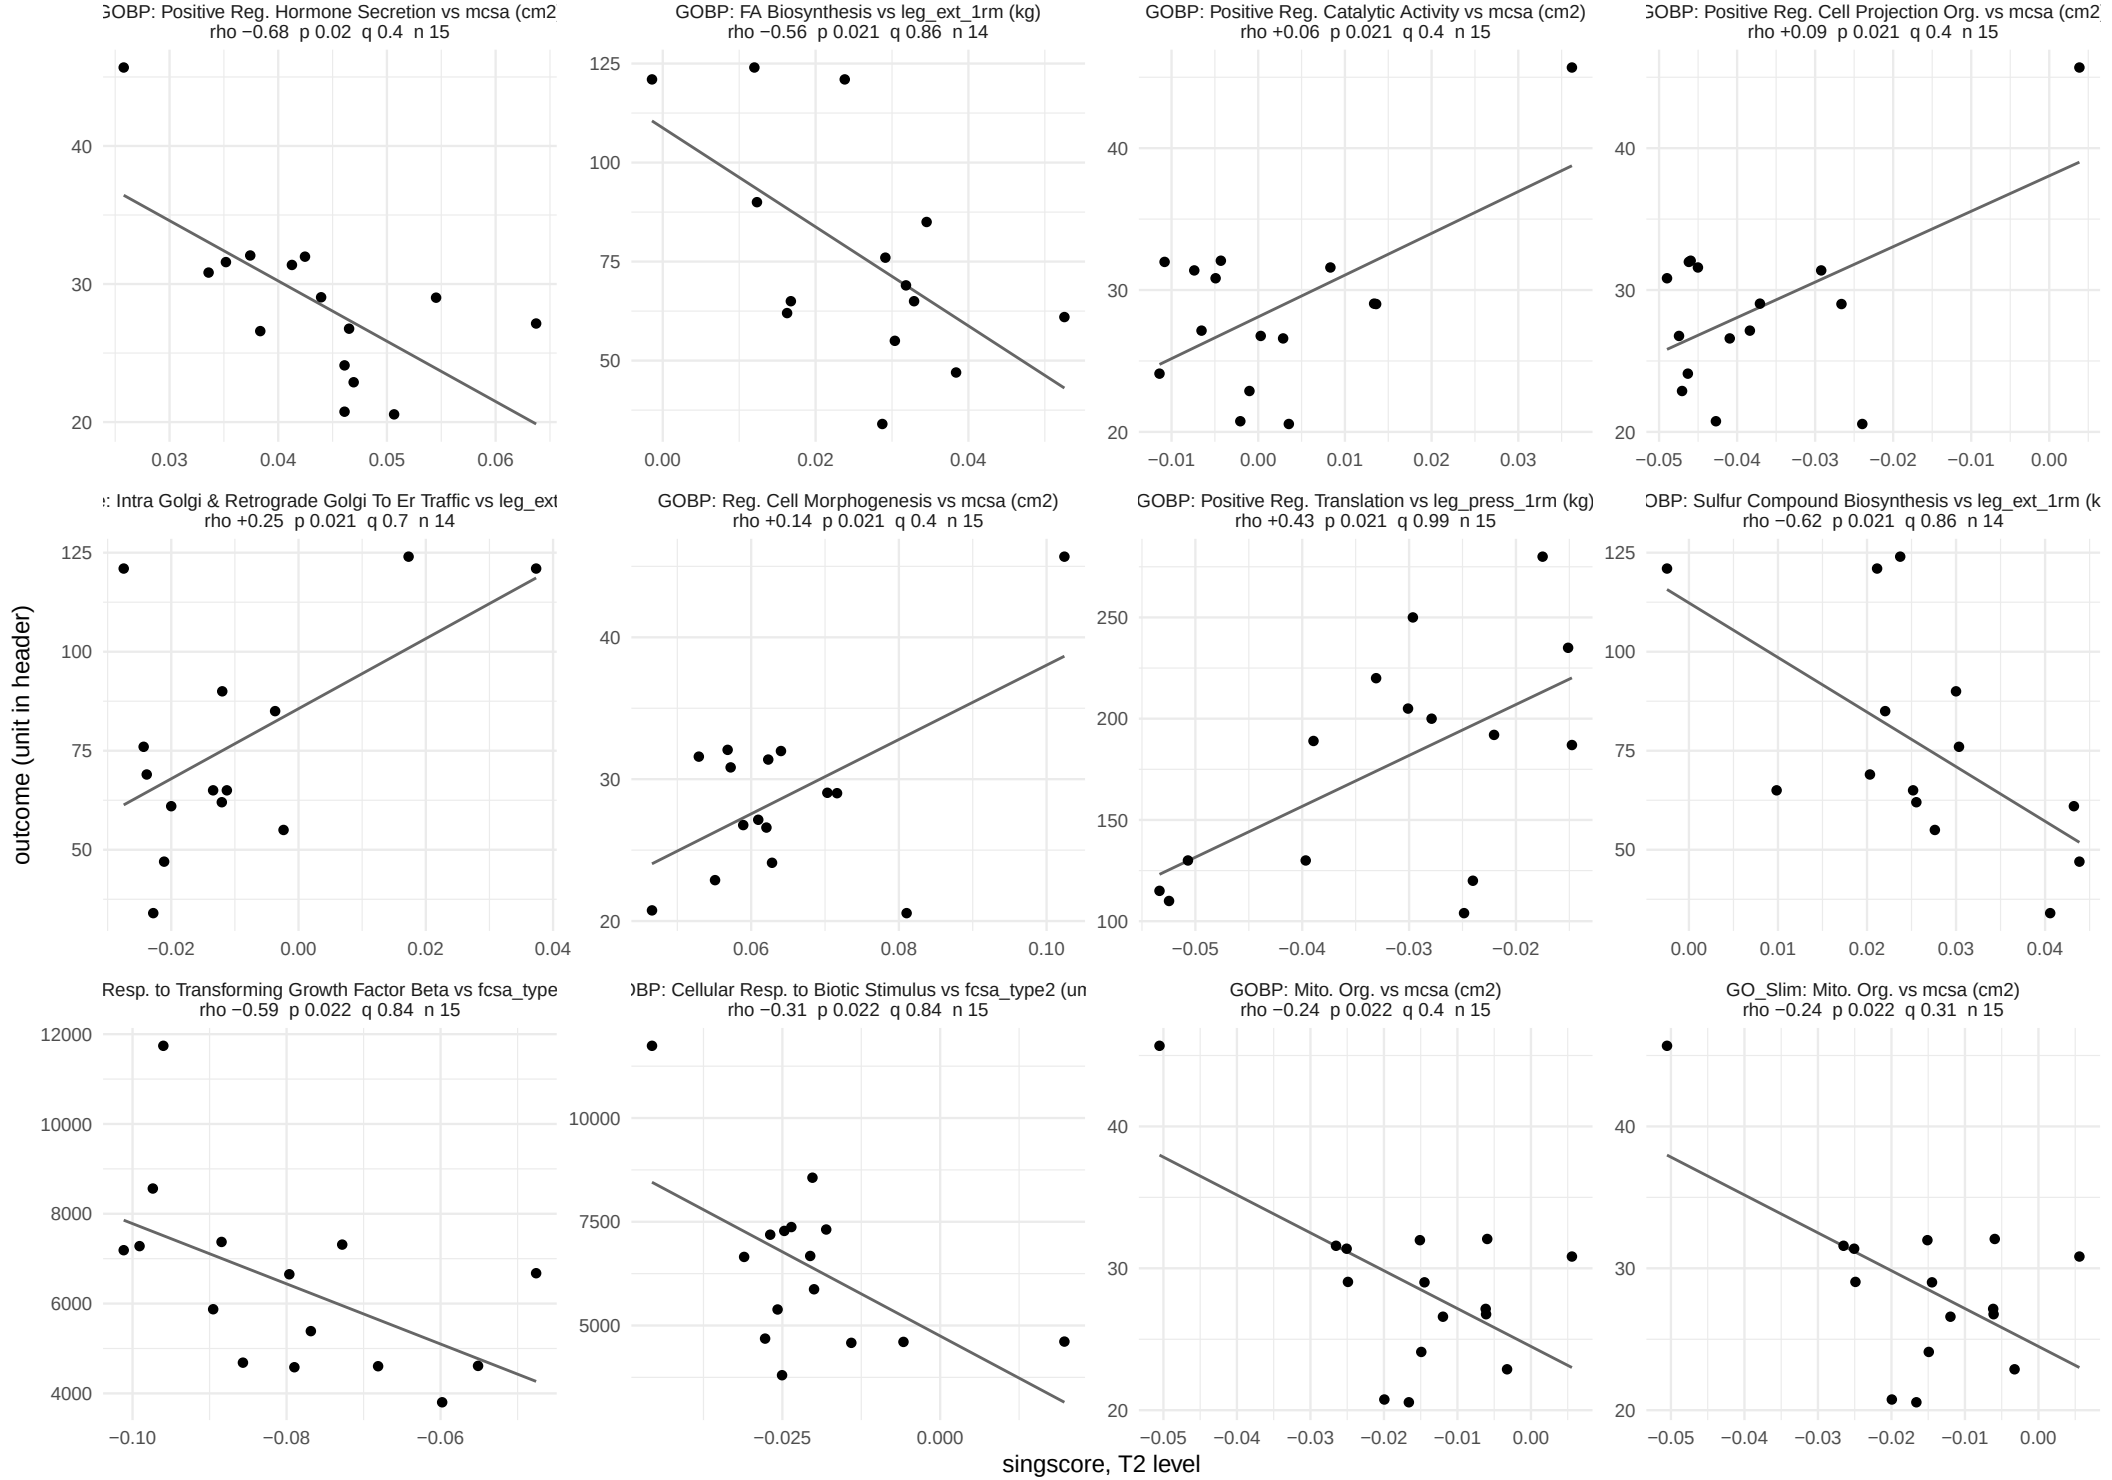

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, post_level window


380 of 8268 feature−outcome pairs at p < 0.05, 5 at BH < 0.05. Page 14 of 32.

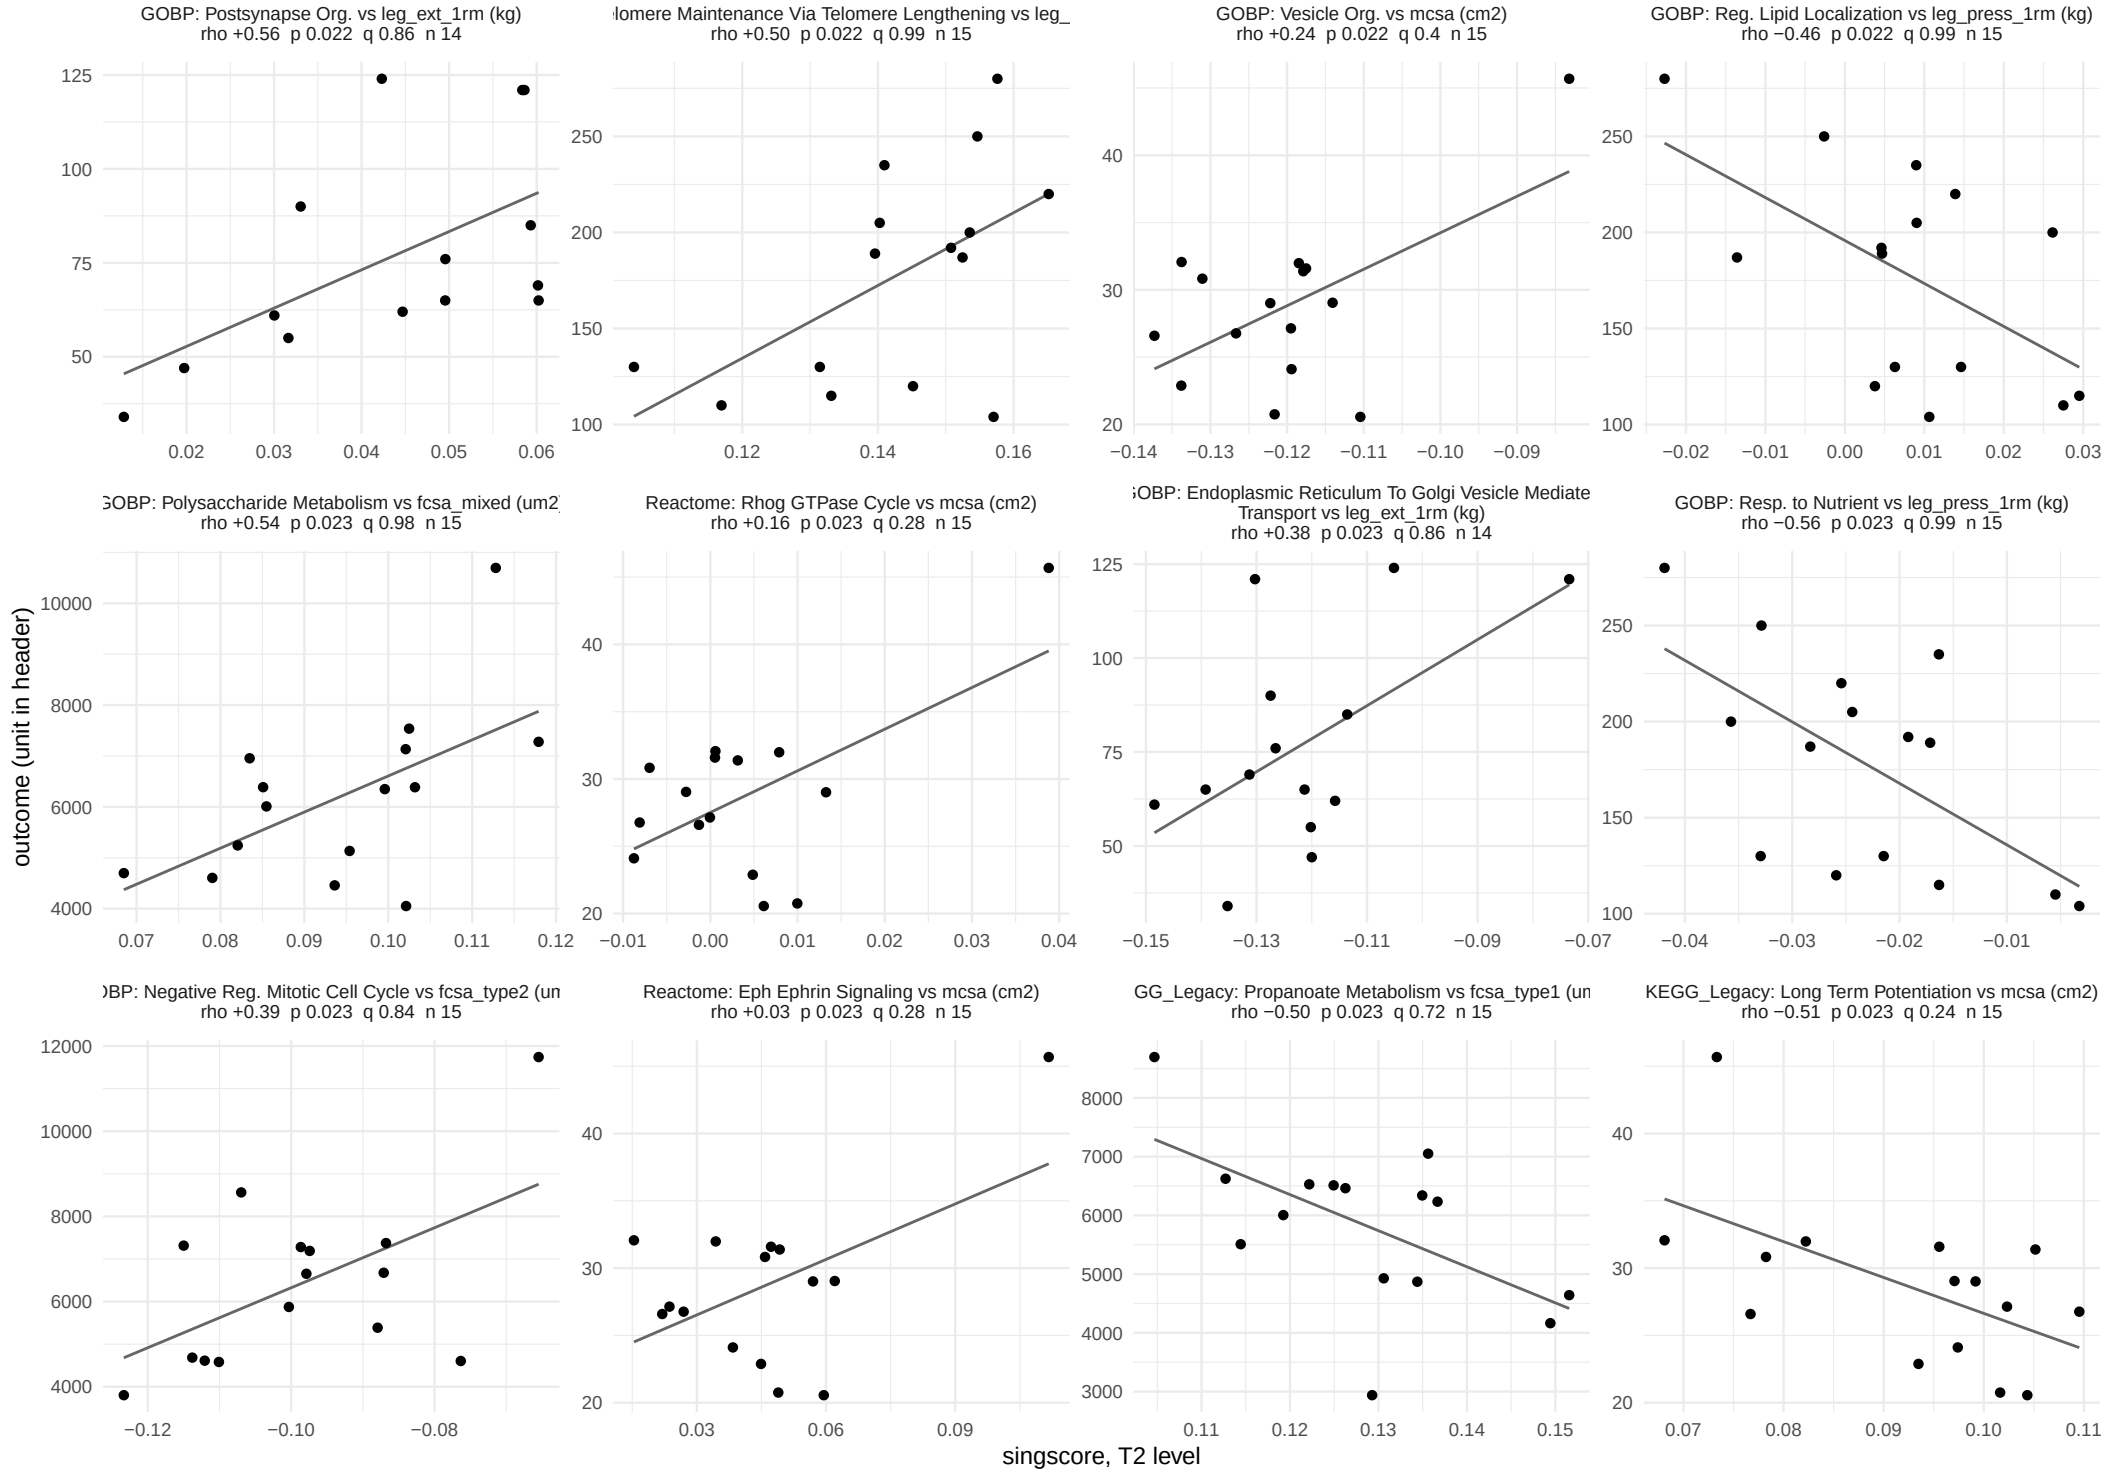

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, post_level window


380 of 8268 feature−outcome pairs at p < 0.05, 5 at BH < 0.05. Page 15 of 32.

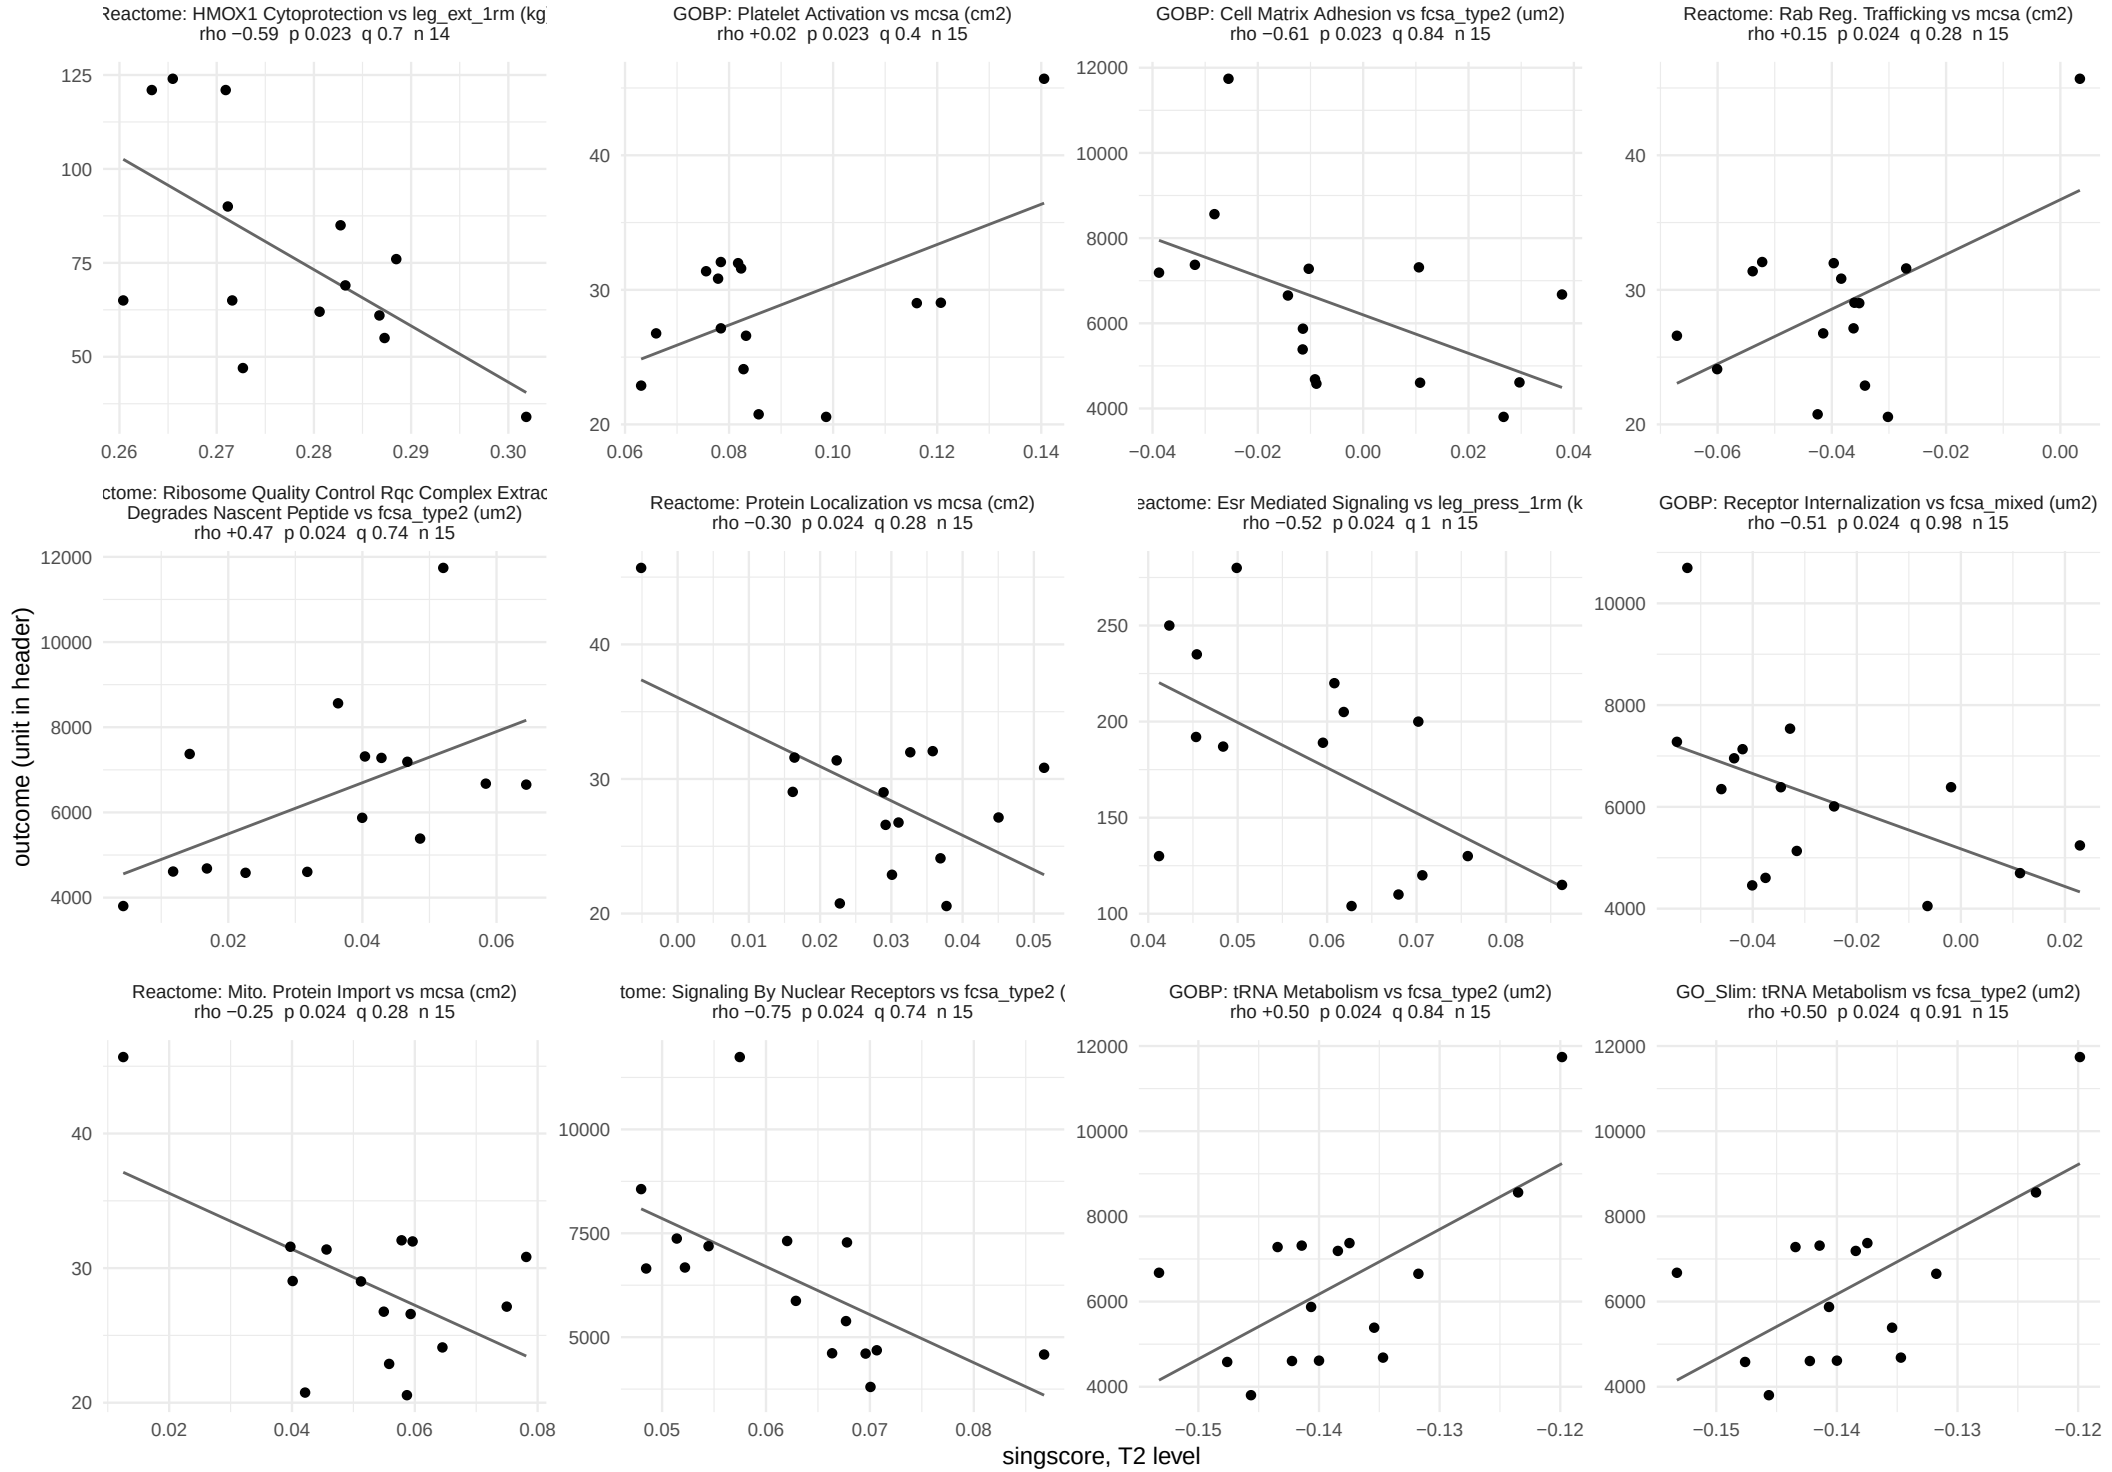

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, post_level window


380 of 8268 feature−outcome pairs at p < 0.05, 5 at BH < 0.05. Page 16 of 32.

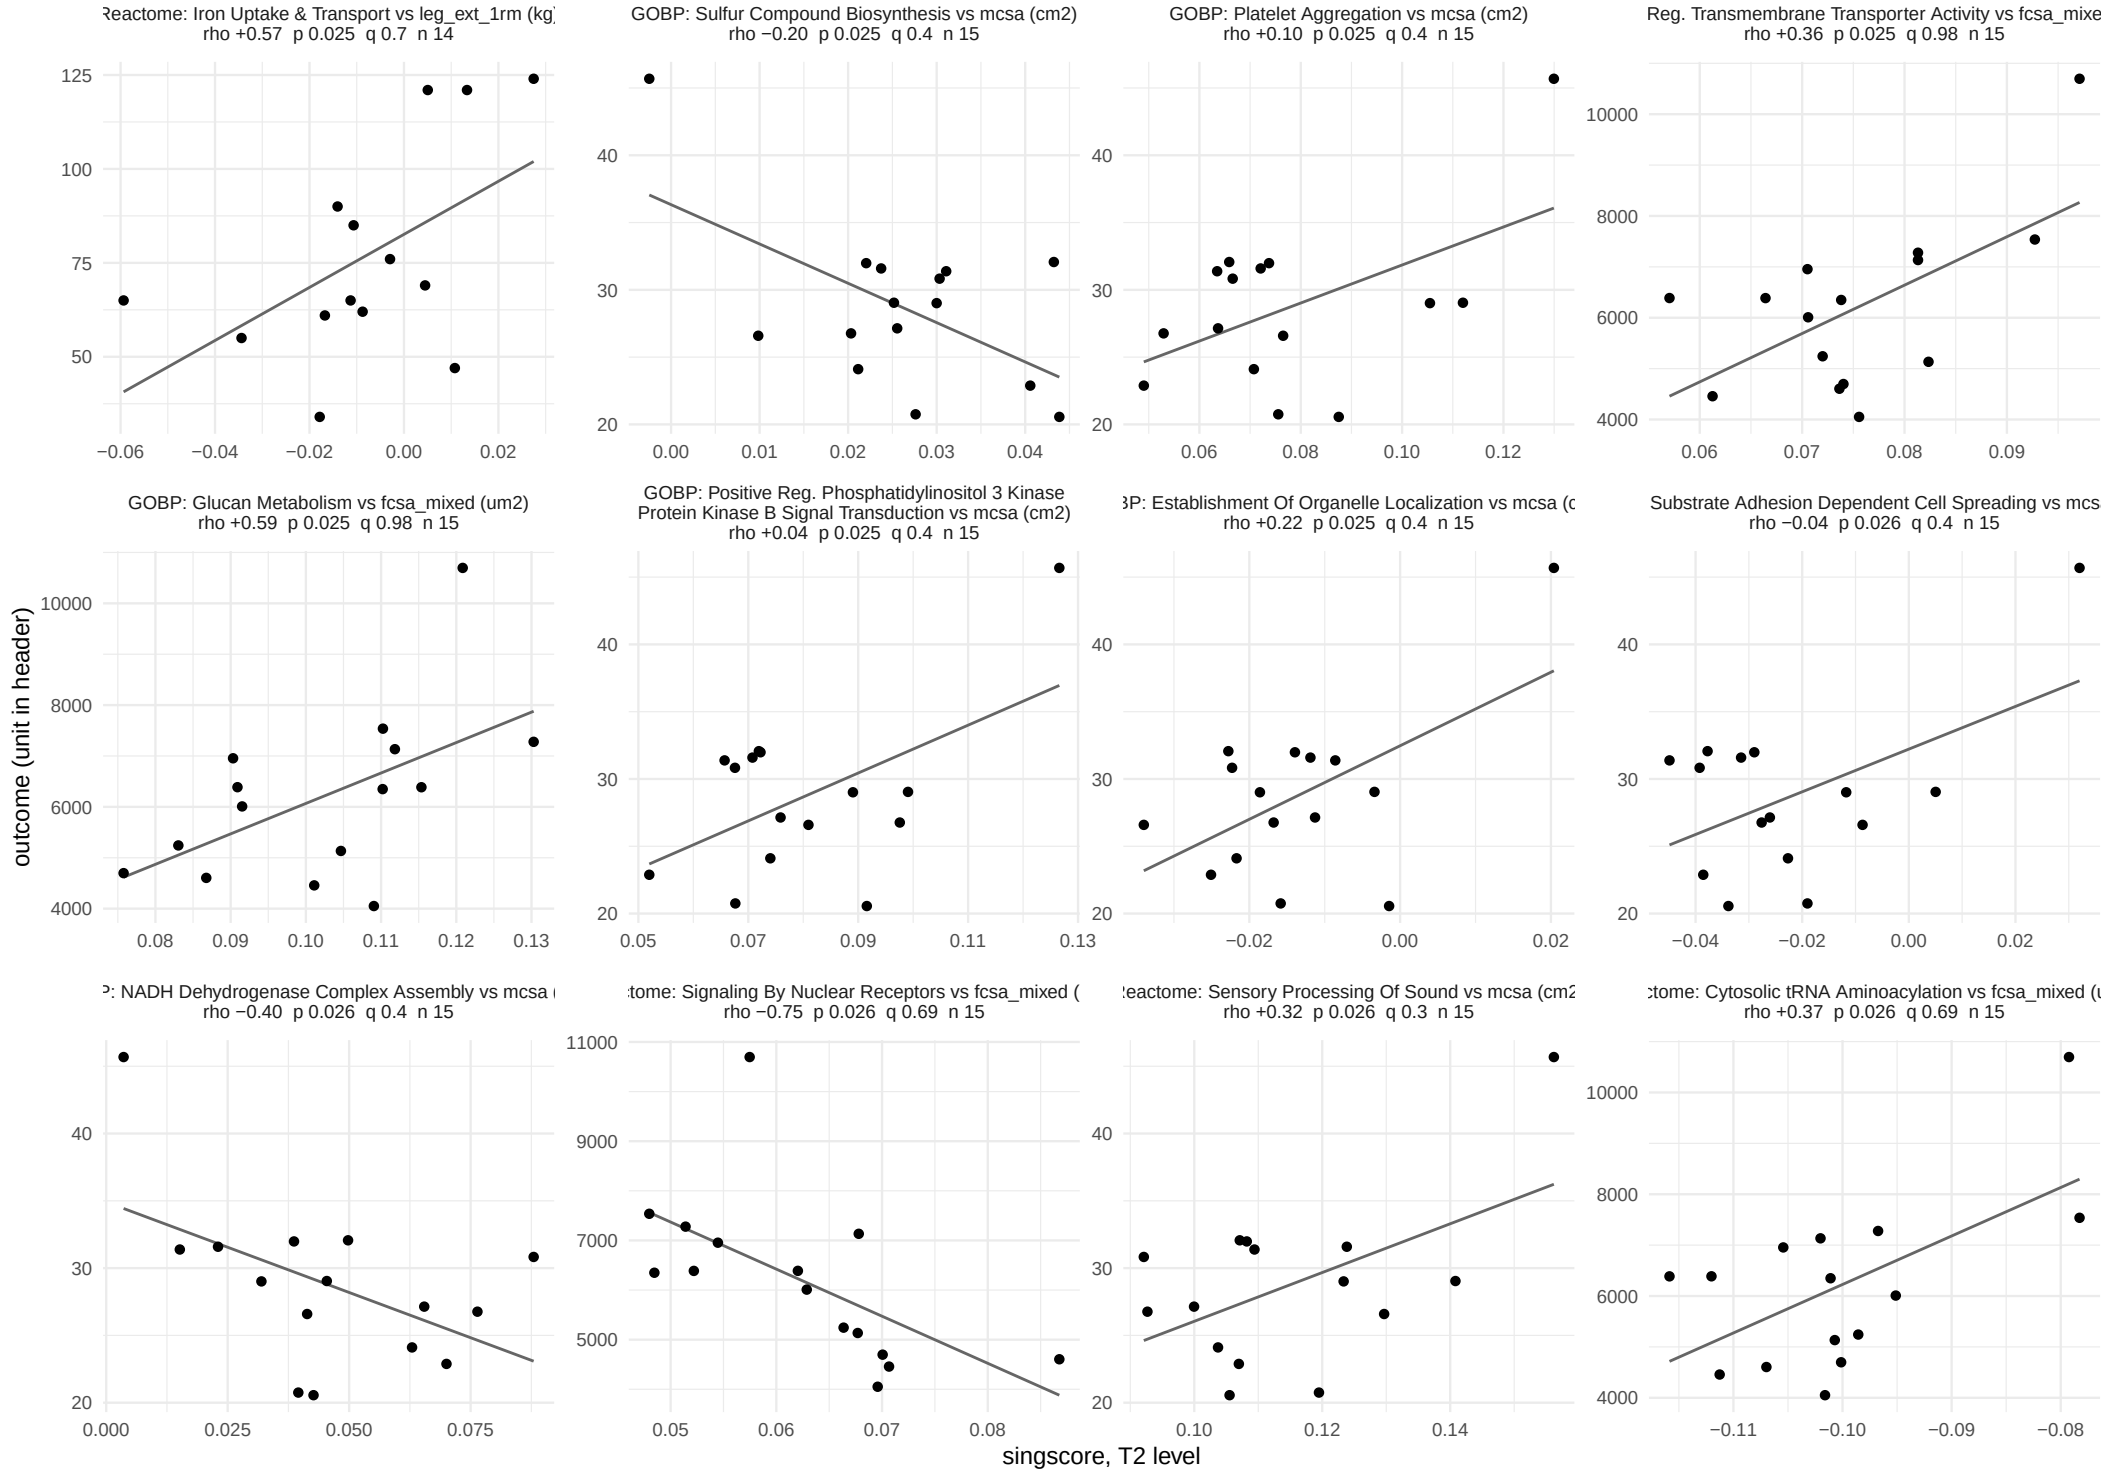

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, post_level window


380 of 8268 feature−outcome pairs at p < 0.05, 5 at BH < 0.05. Page 17 of 32.

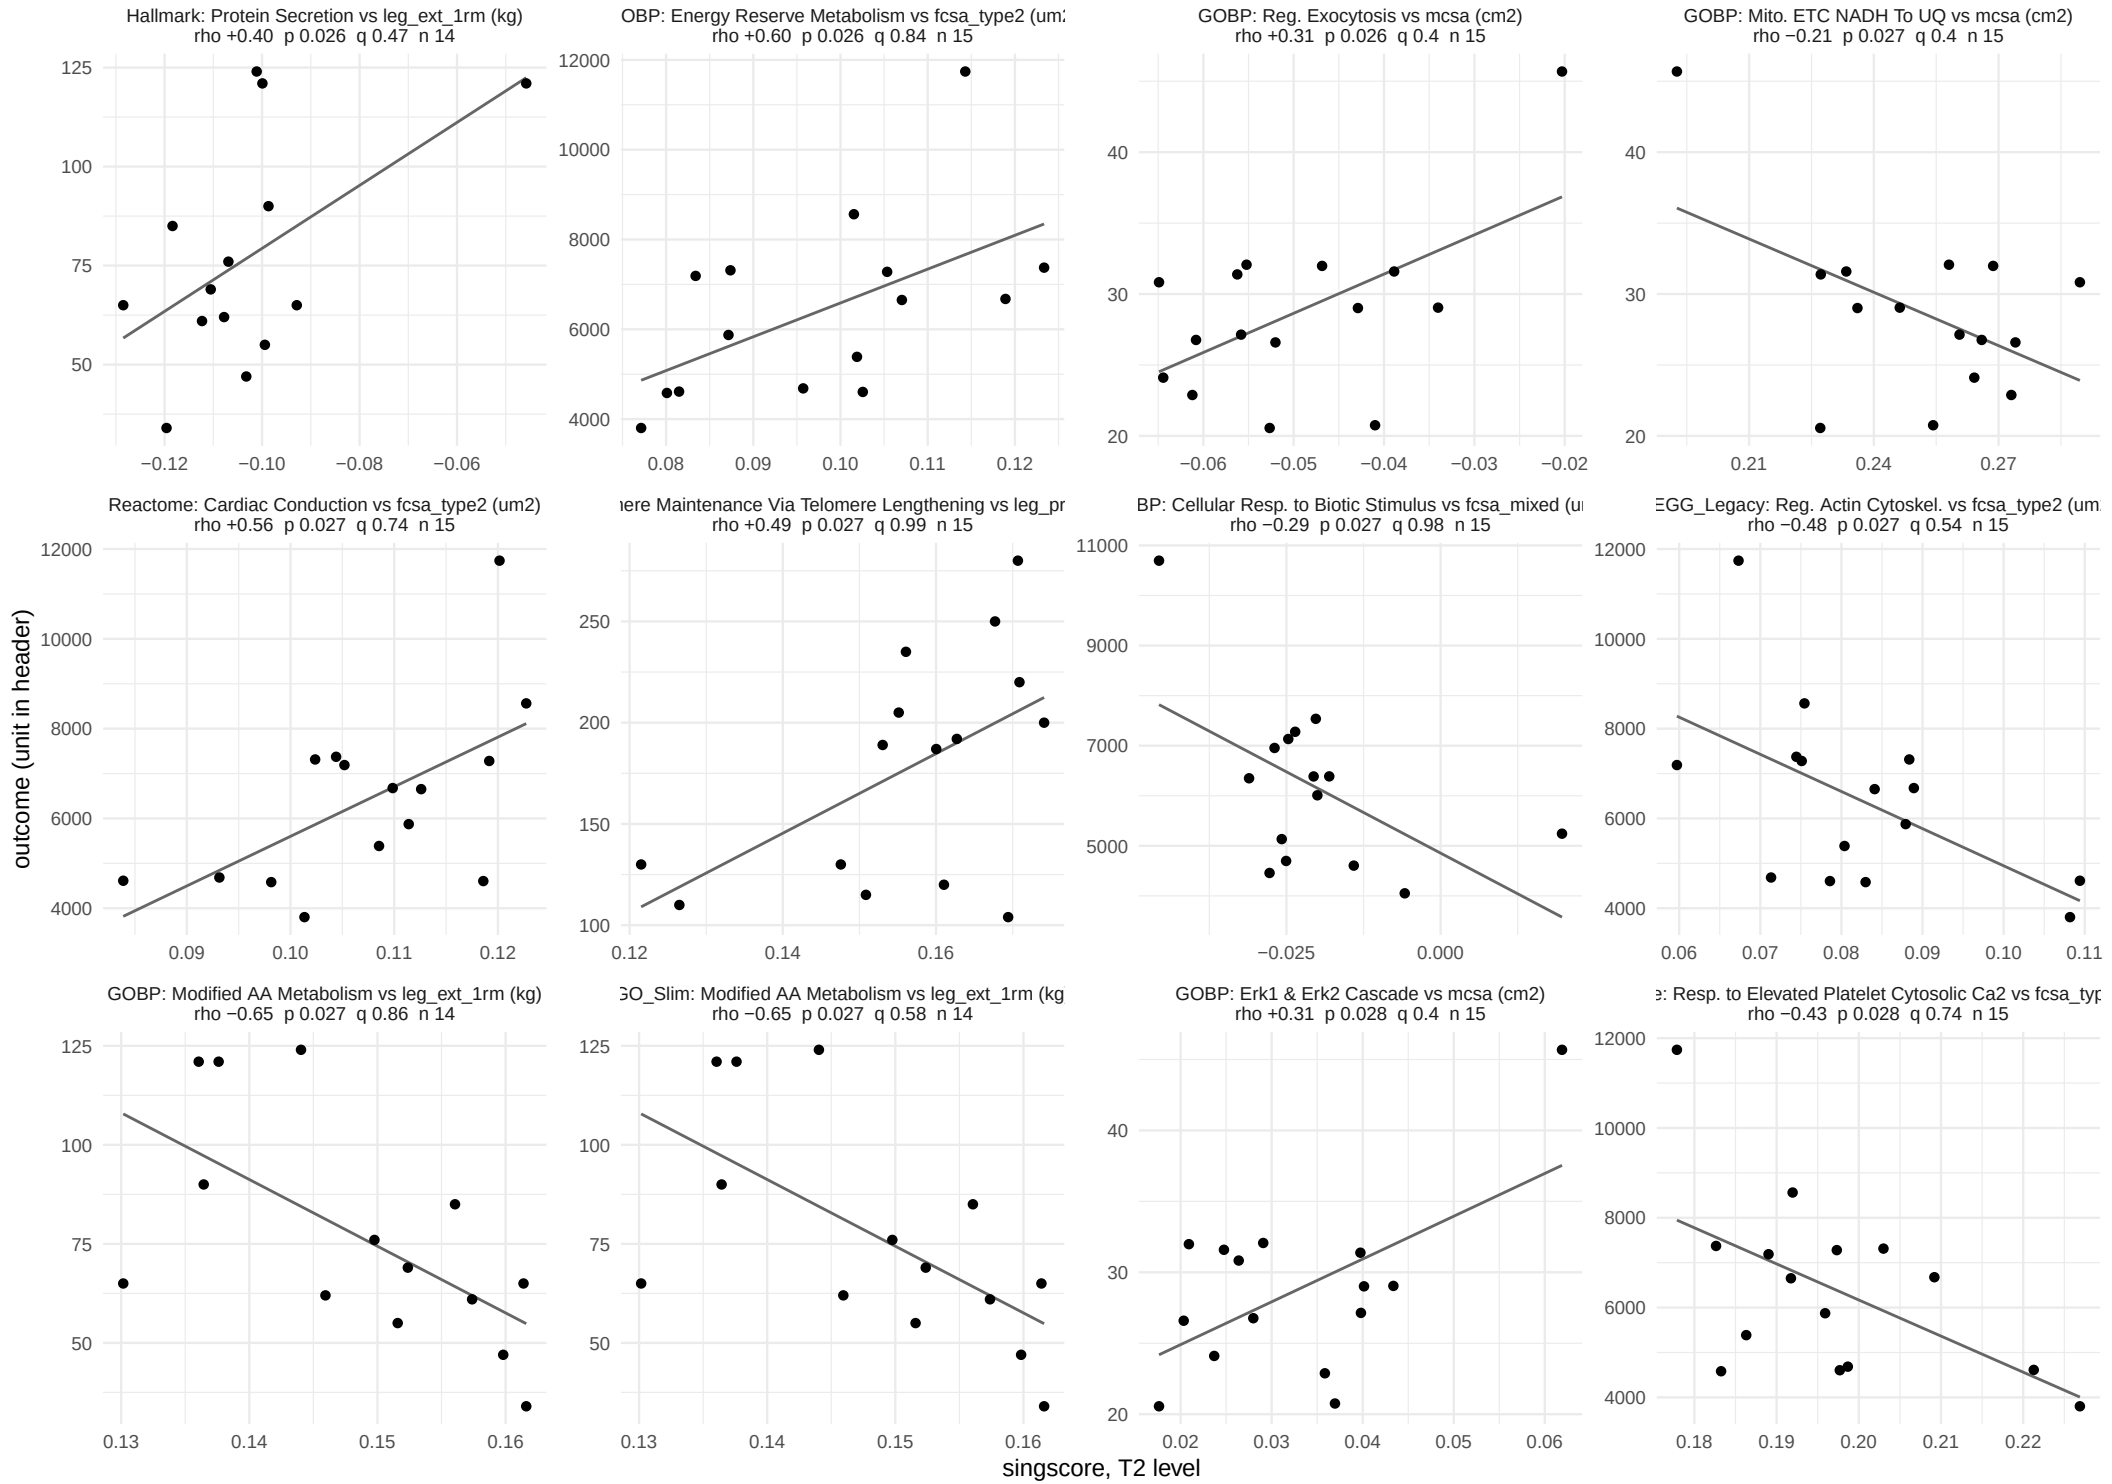

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, post_level window


380 of 8268 feature−outcome pairs at p < 0.05, 5 at BH < 0.05. Page 18 of 32.

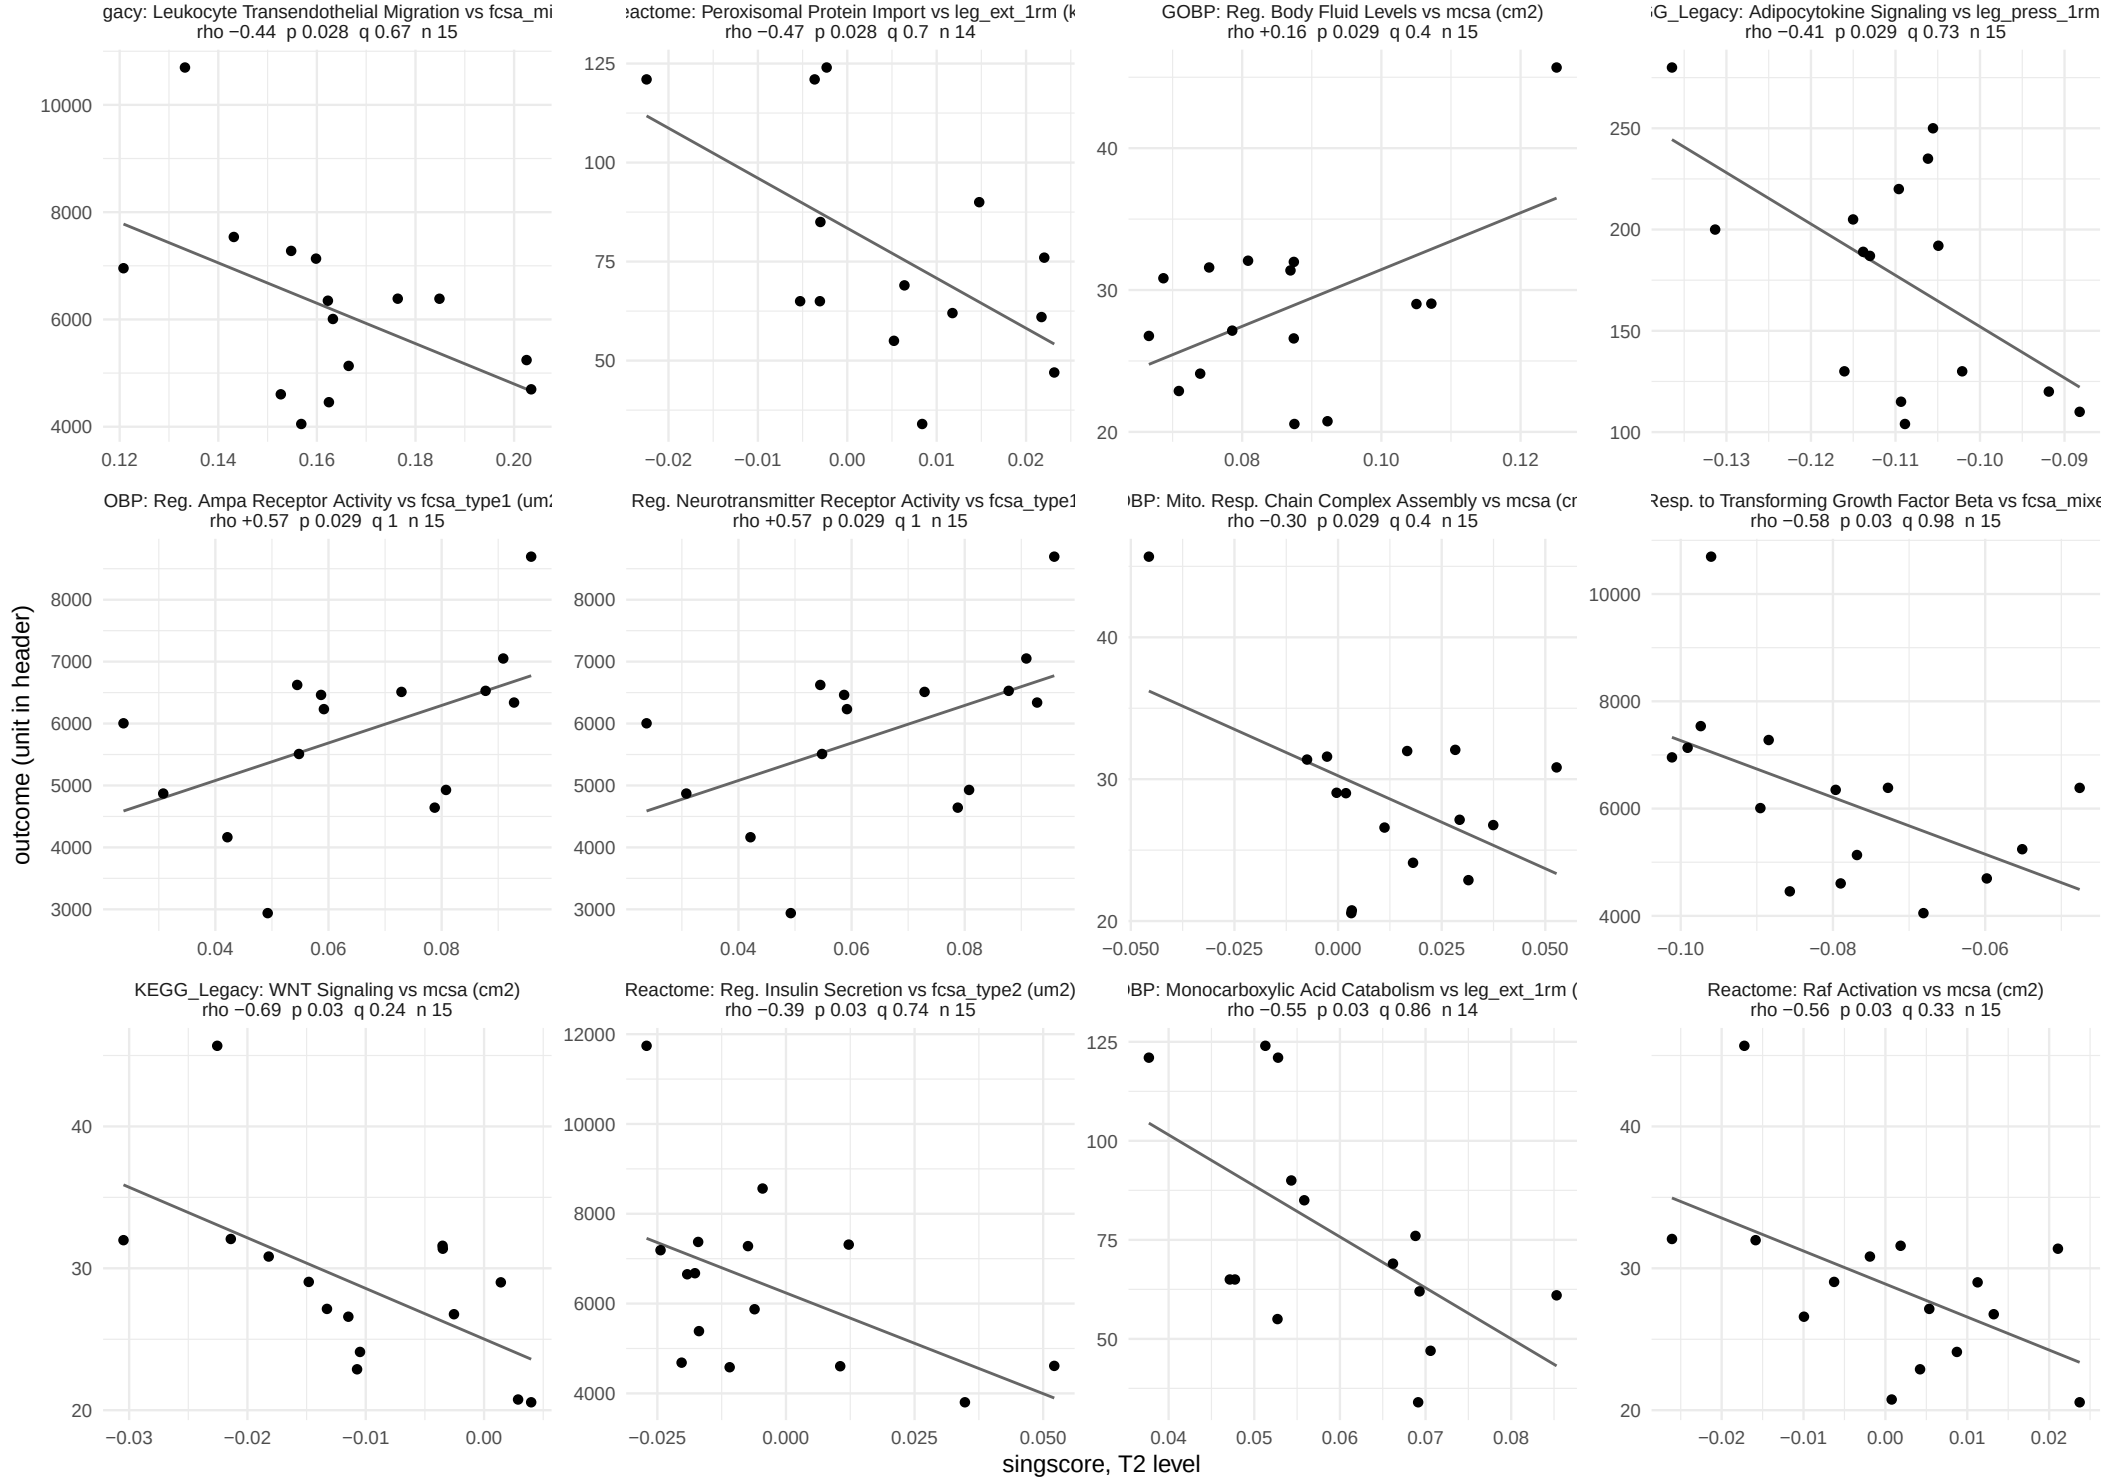

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, post_level window


380 of 8268 feature−outcome pairs at p < 0.05, 5 at BH < 0.05. Page 19 of 32.

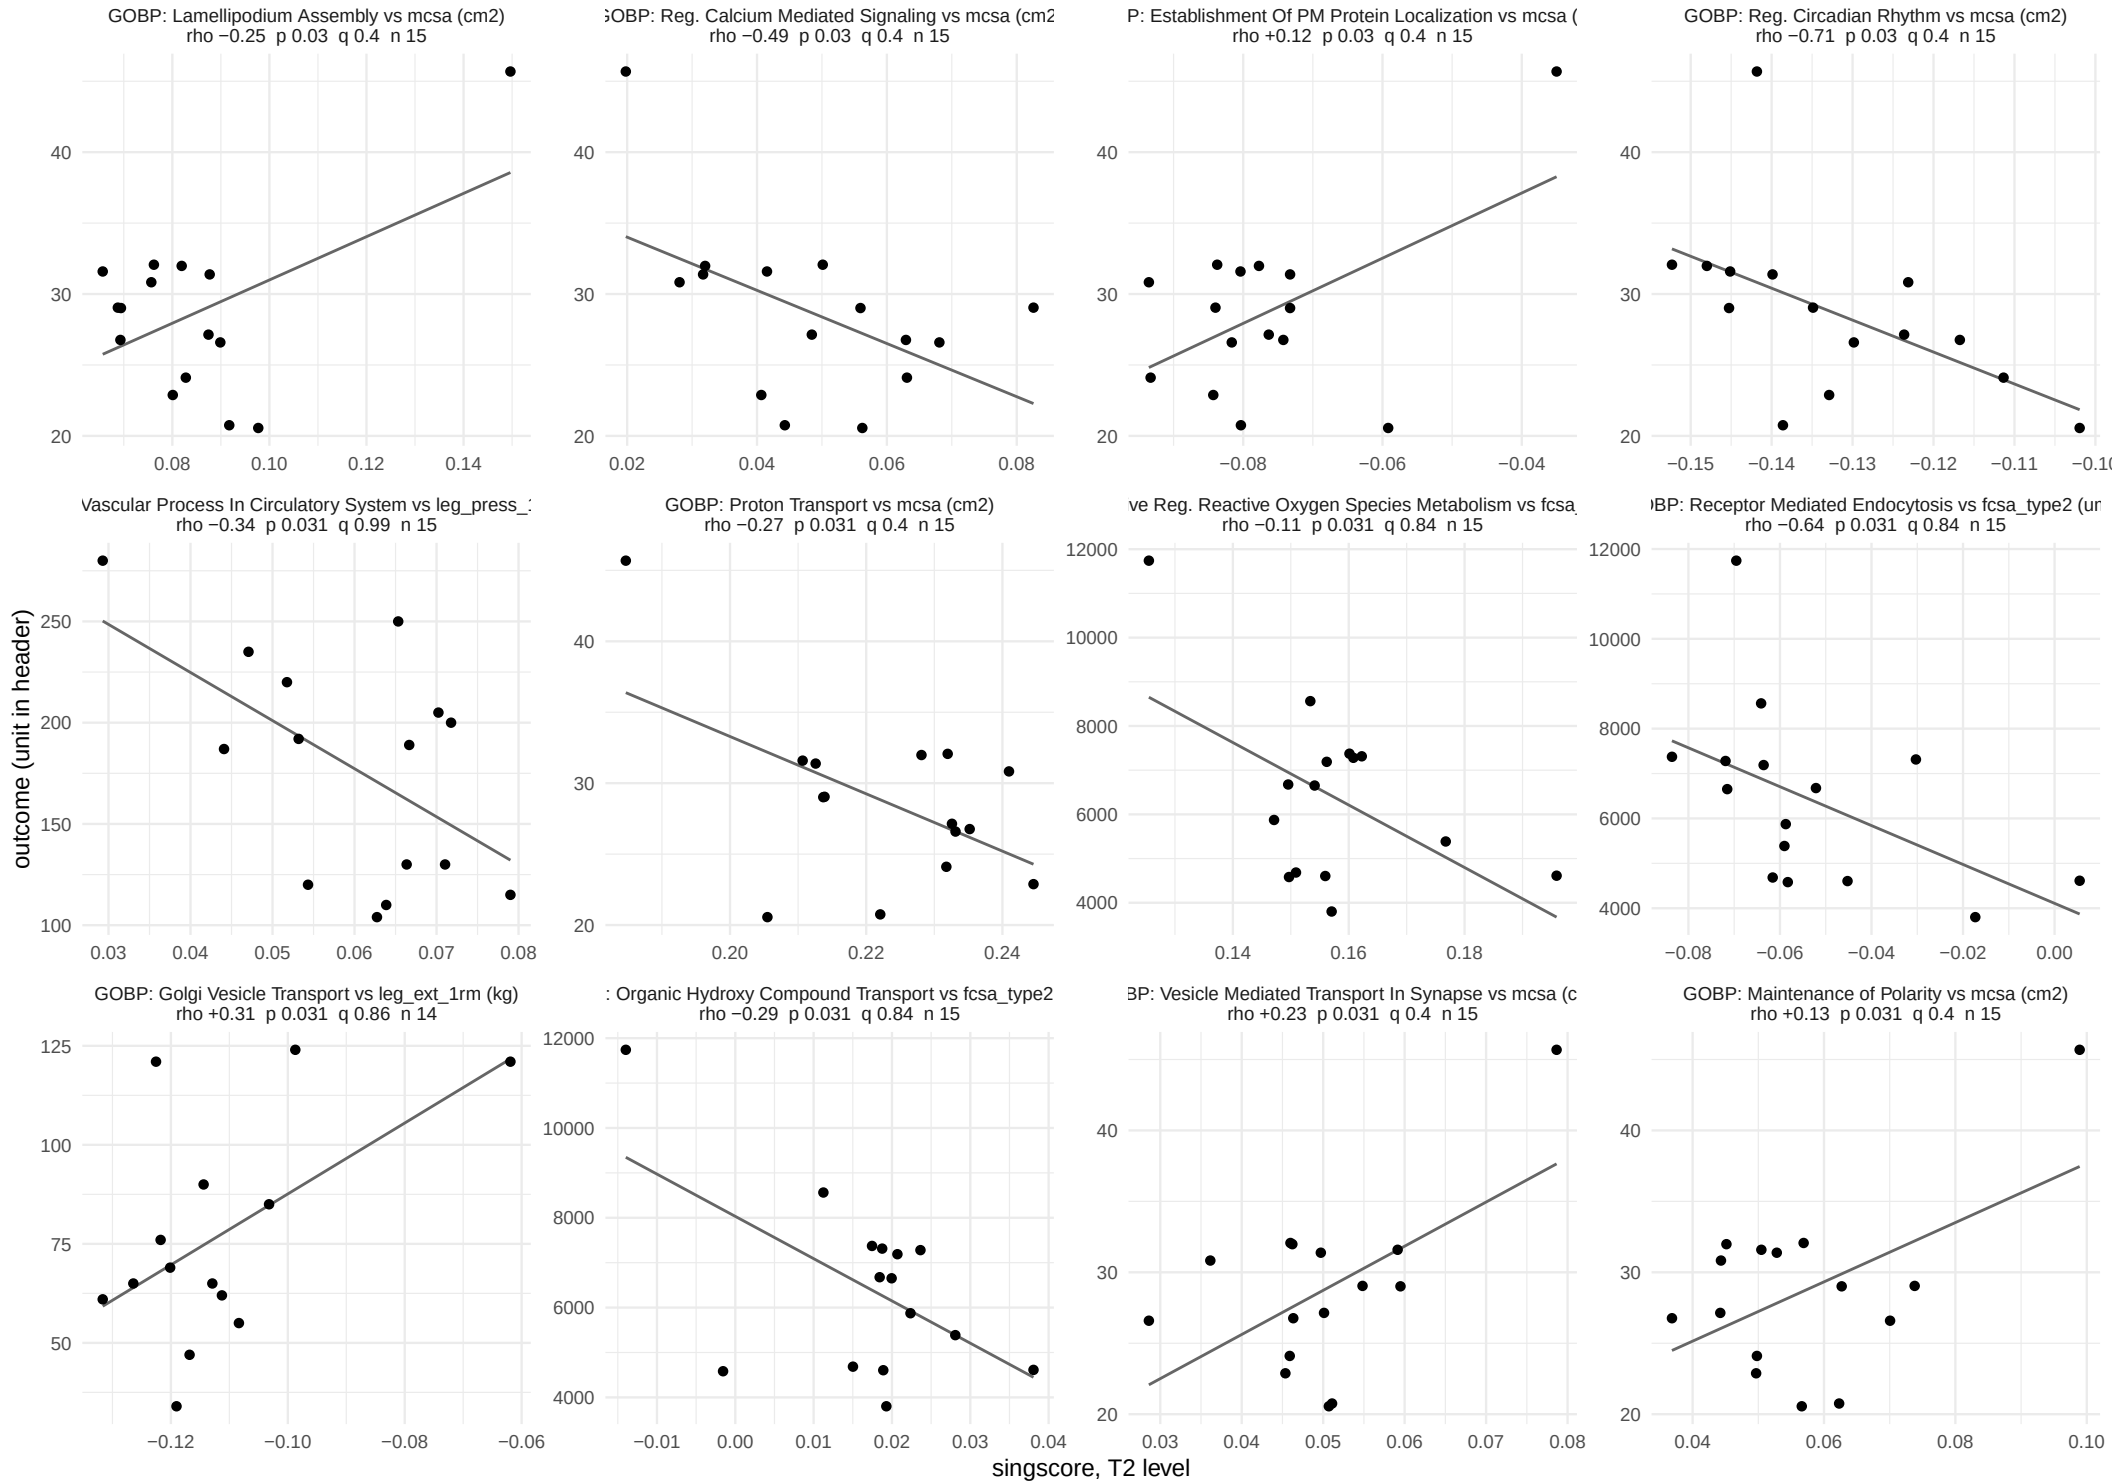

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, post_level window


380 of 8268 feature−outcome pairs at p < 0.05, 5 at BH < 0.05. Page 20 of 32.

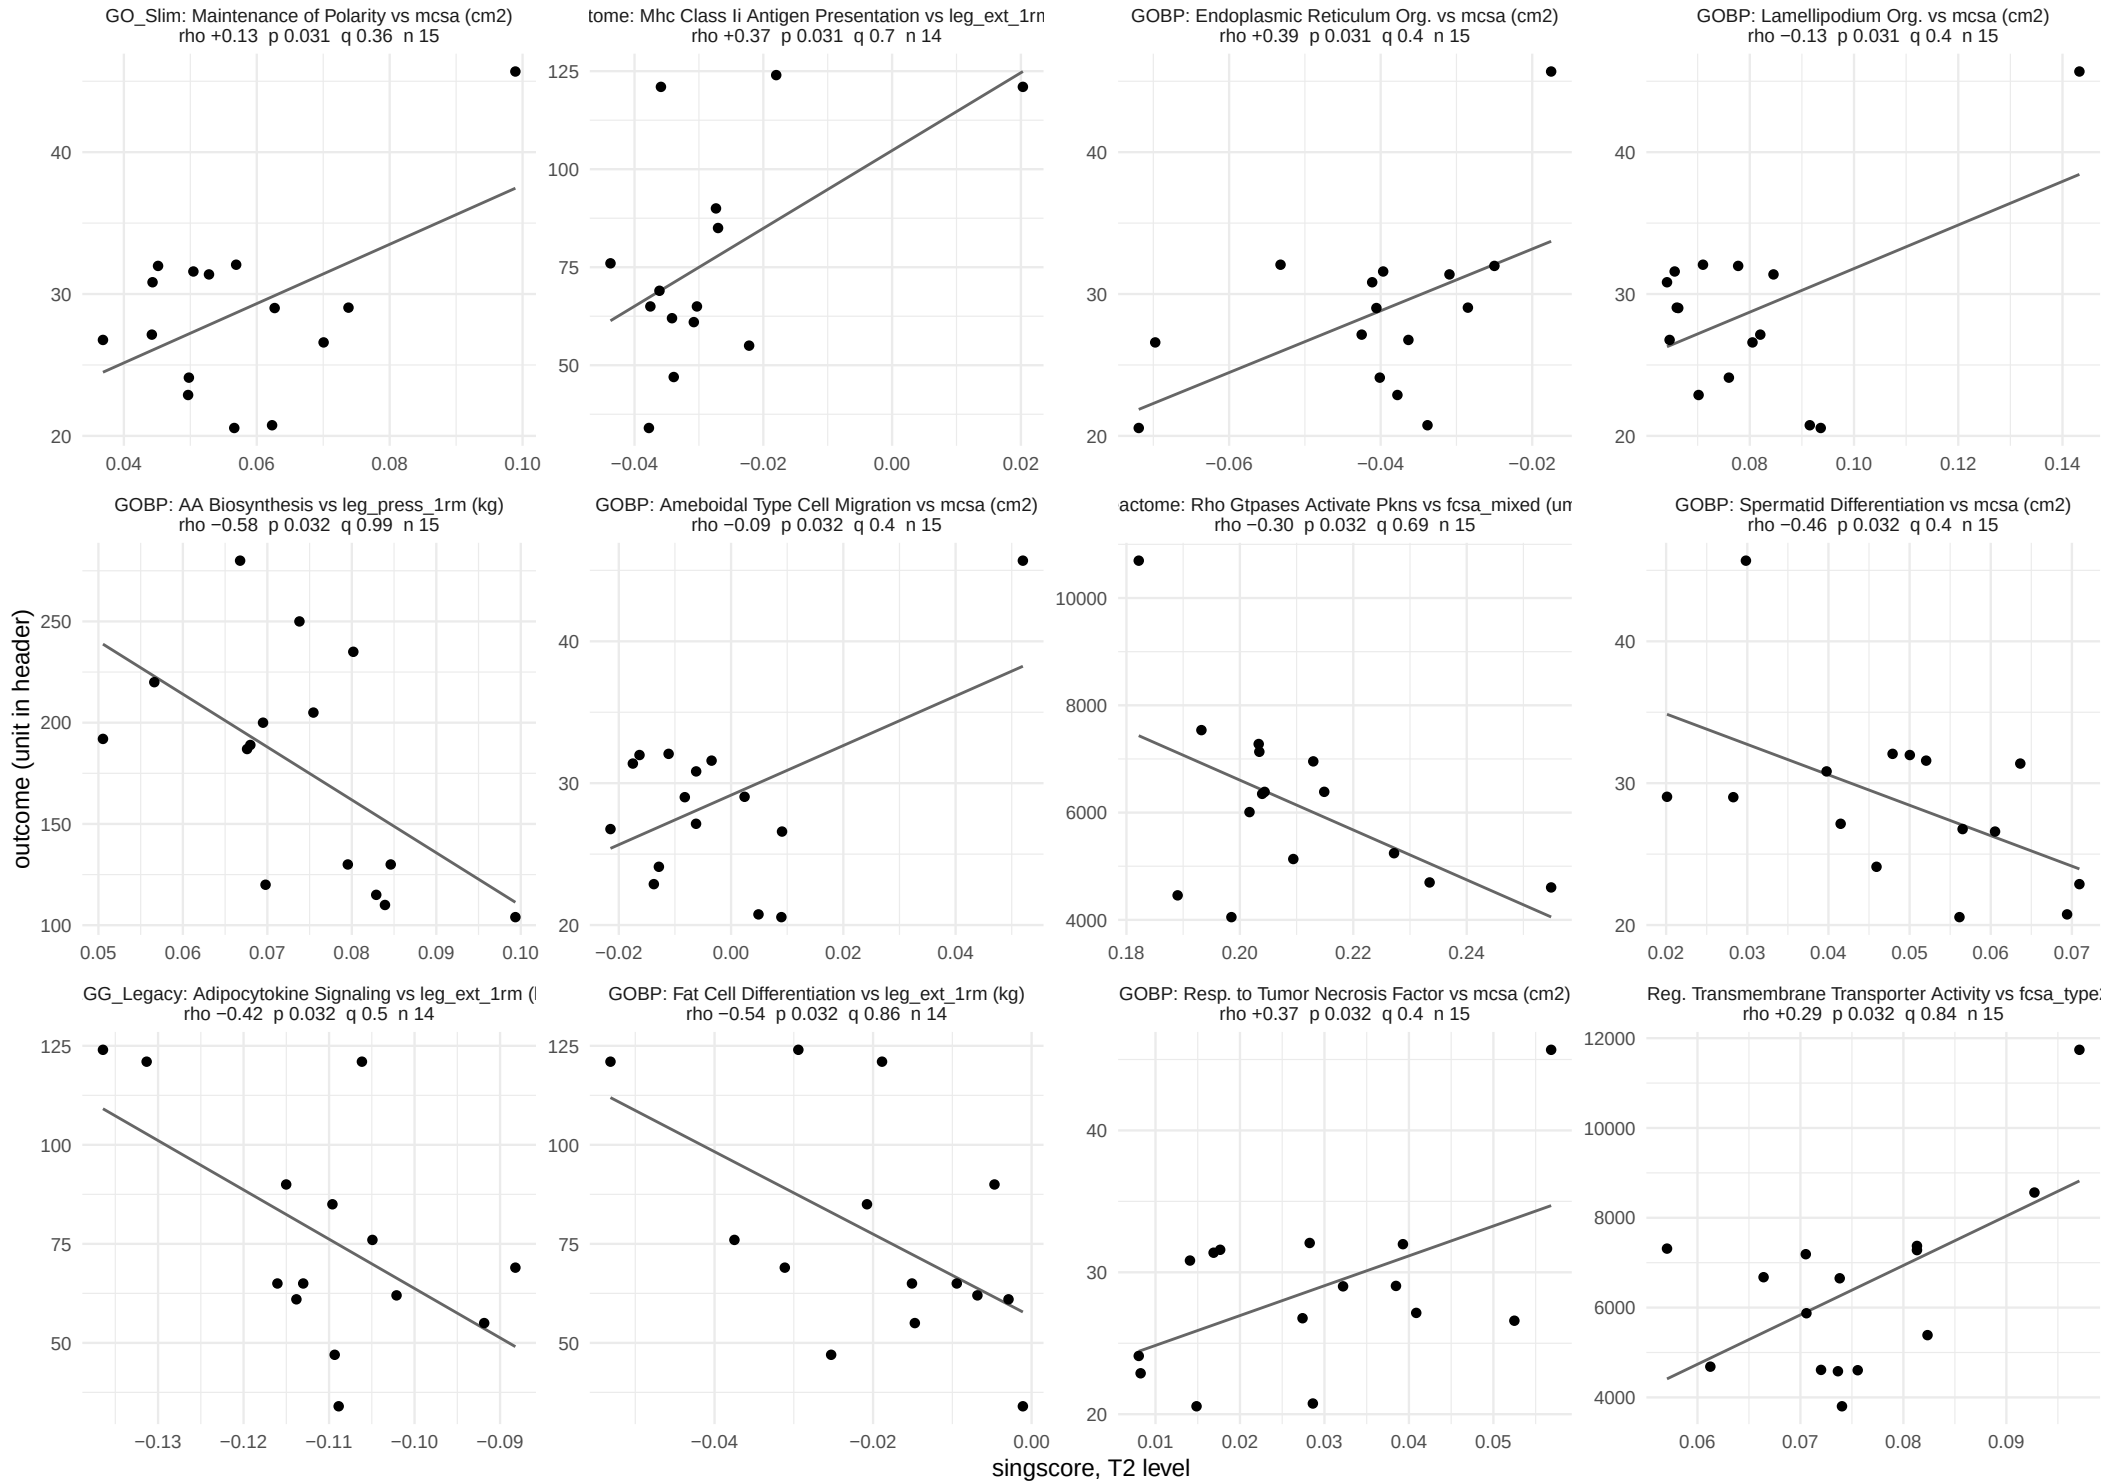

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, post_level window


380 of 8268 feature−outcome pairs at p < 0.05, 5 at BH < 0.05. Page 21 of 32.

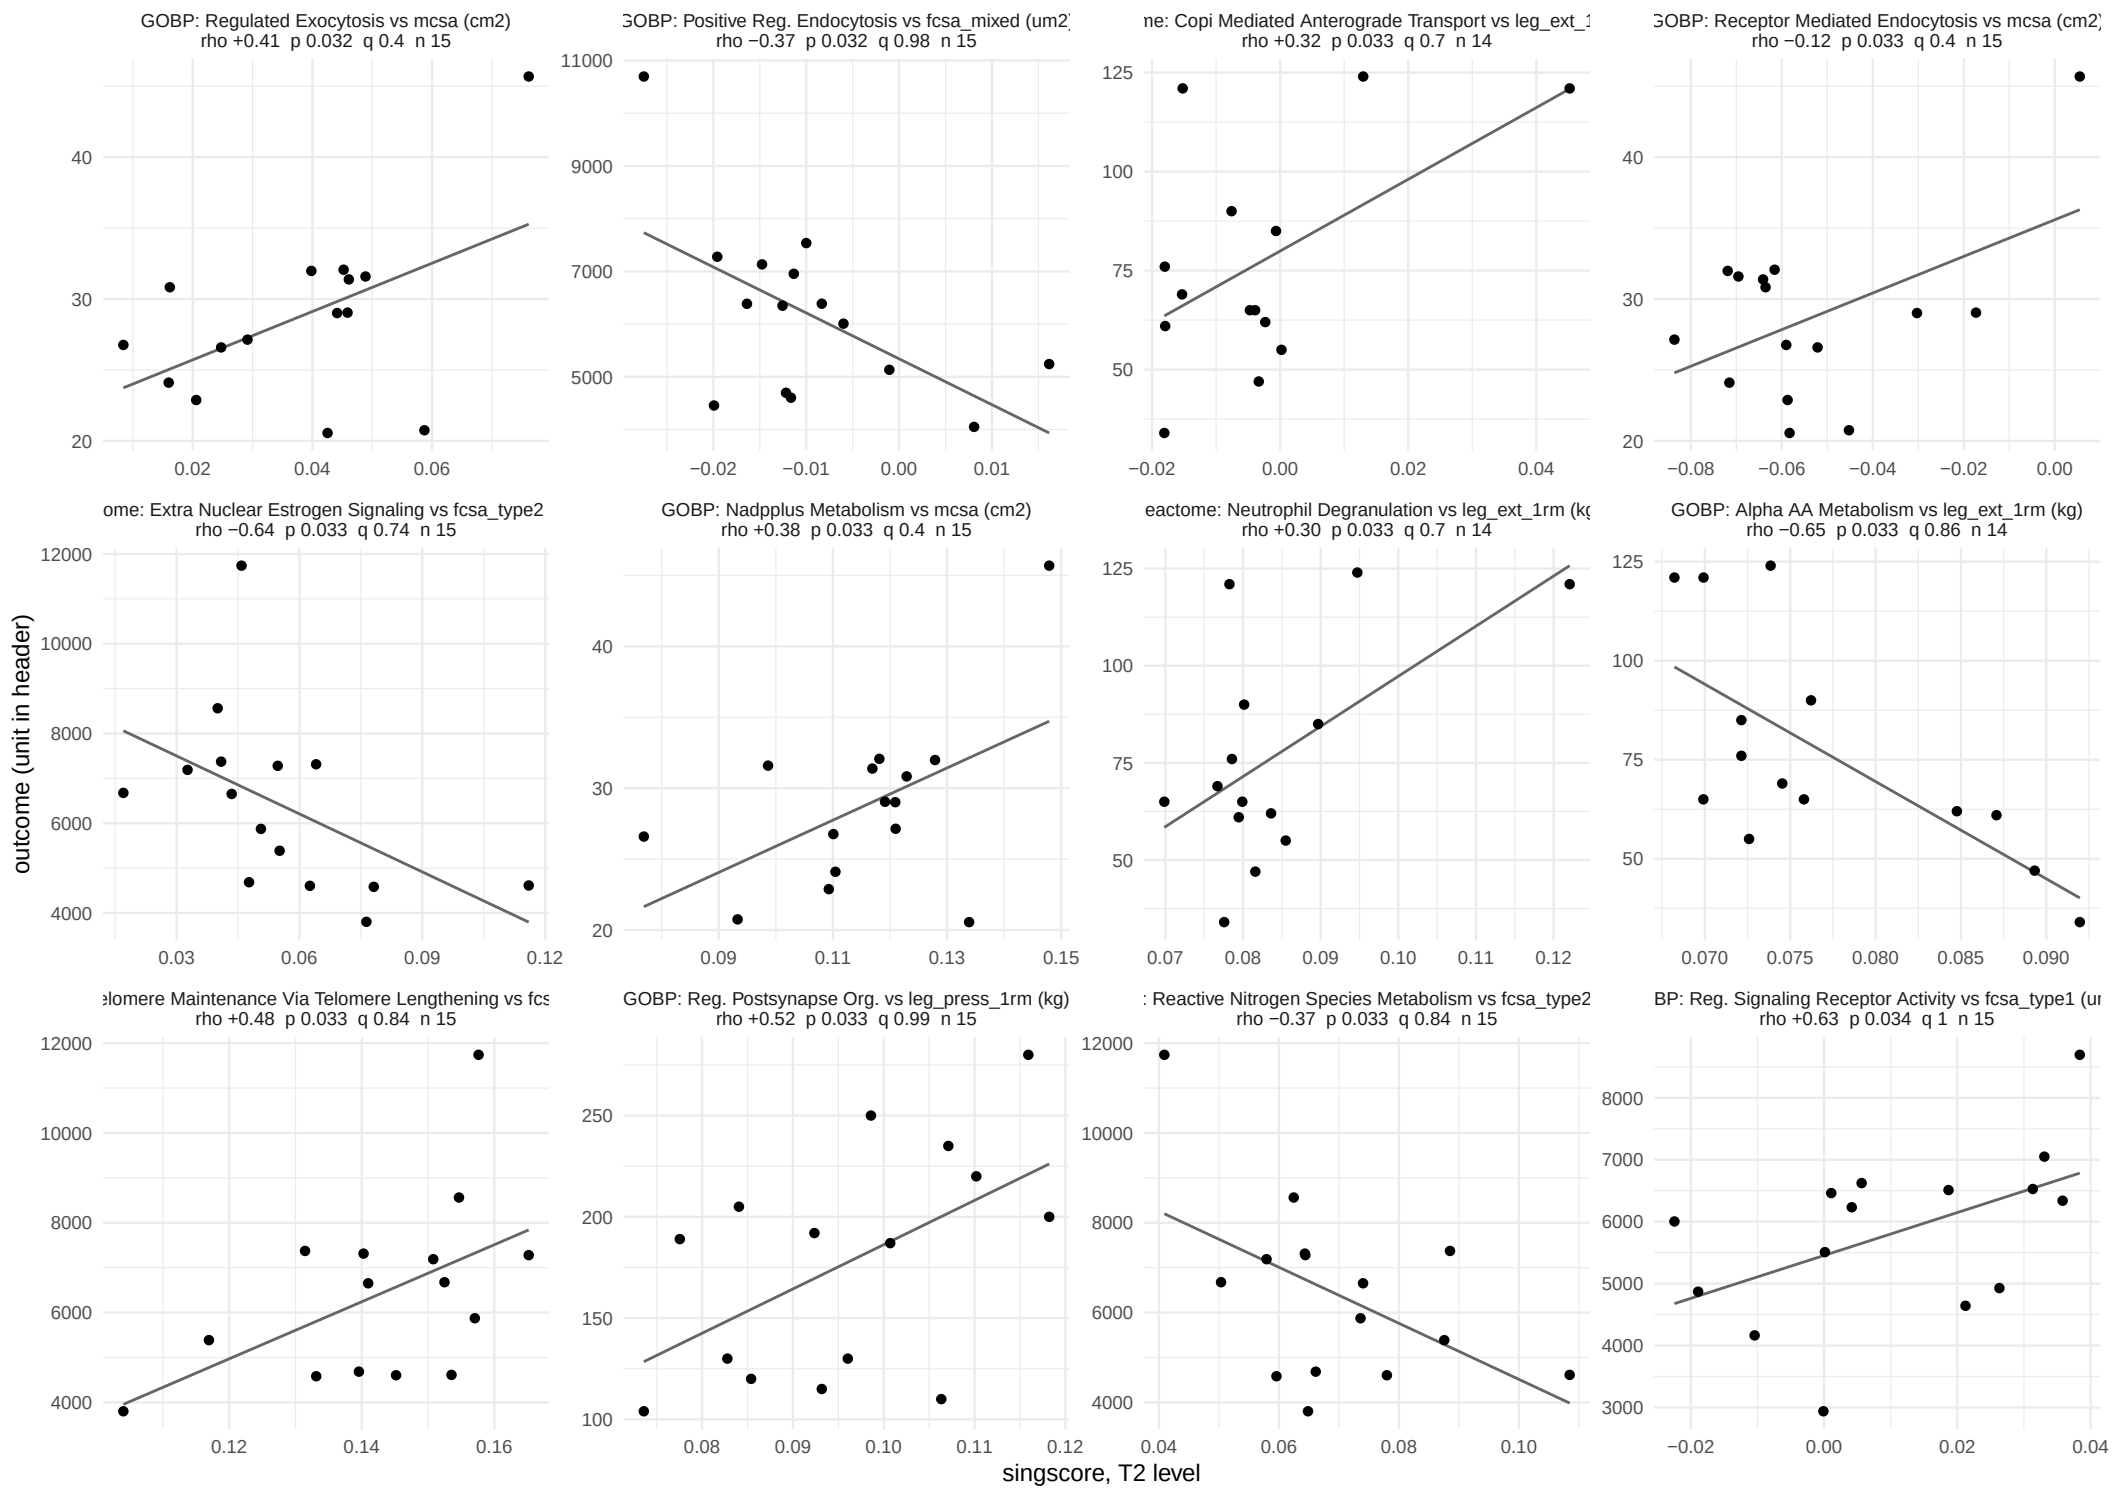

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, post_level window


380 of 8268 feature−outcome pairs at p < 0.05, 5 at BH < 0.05. Page 22 of 32.

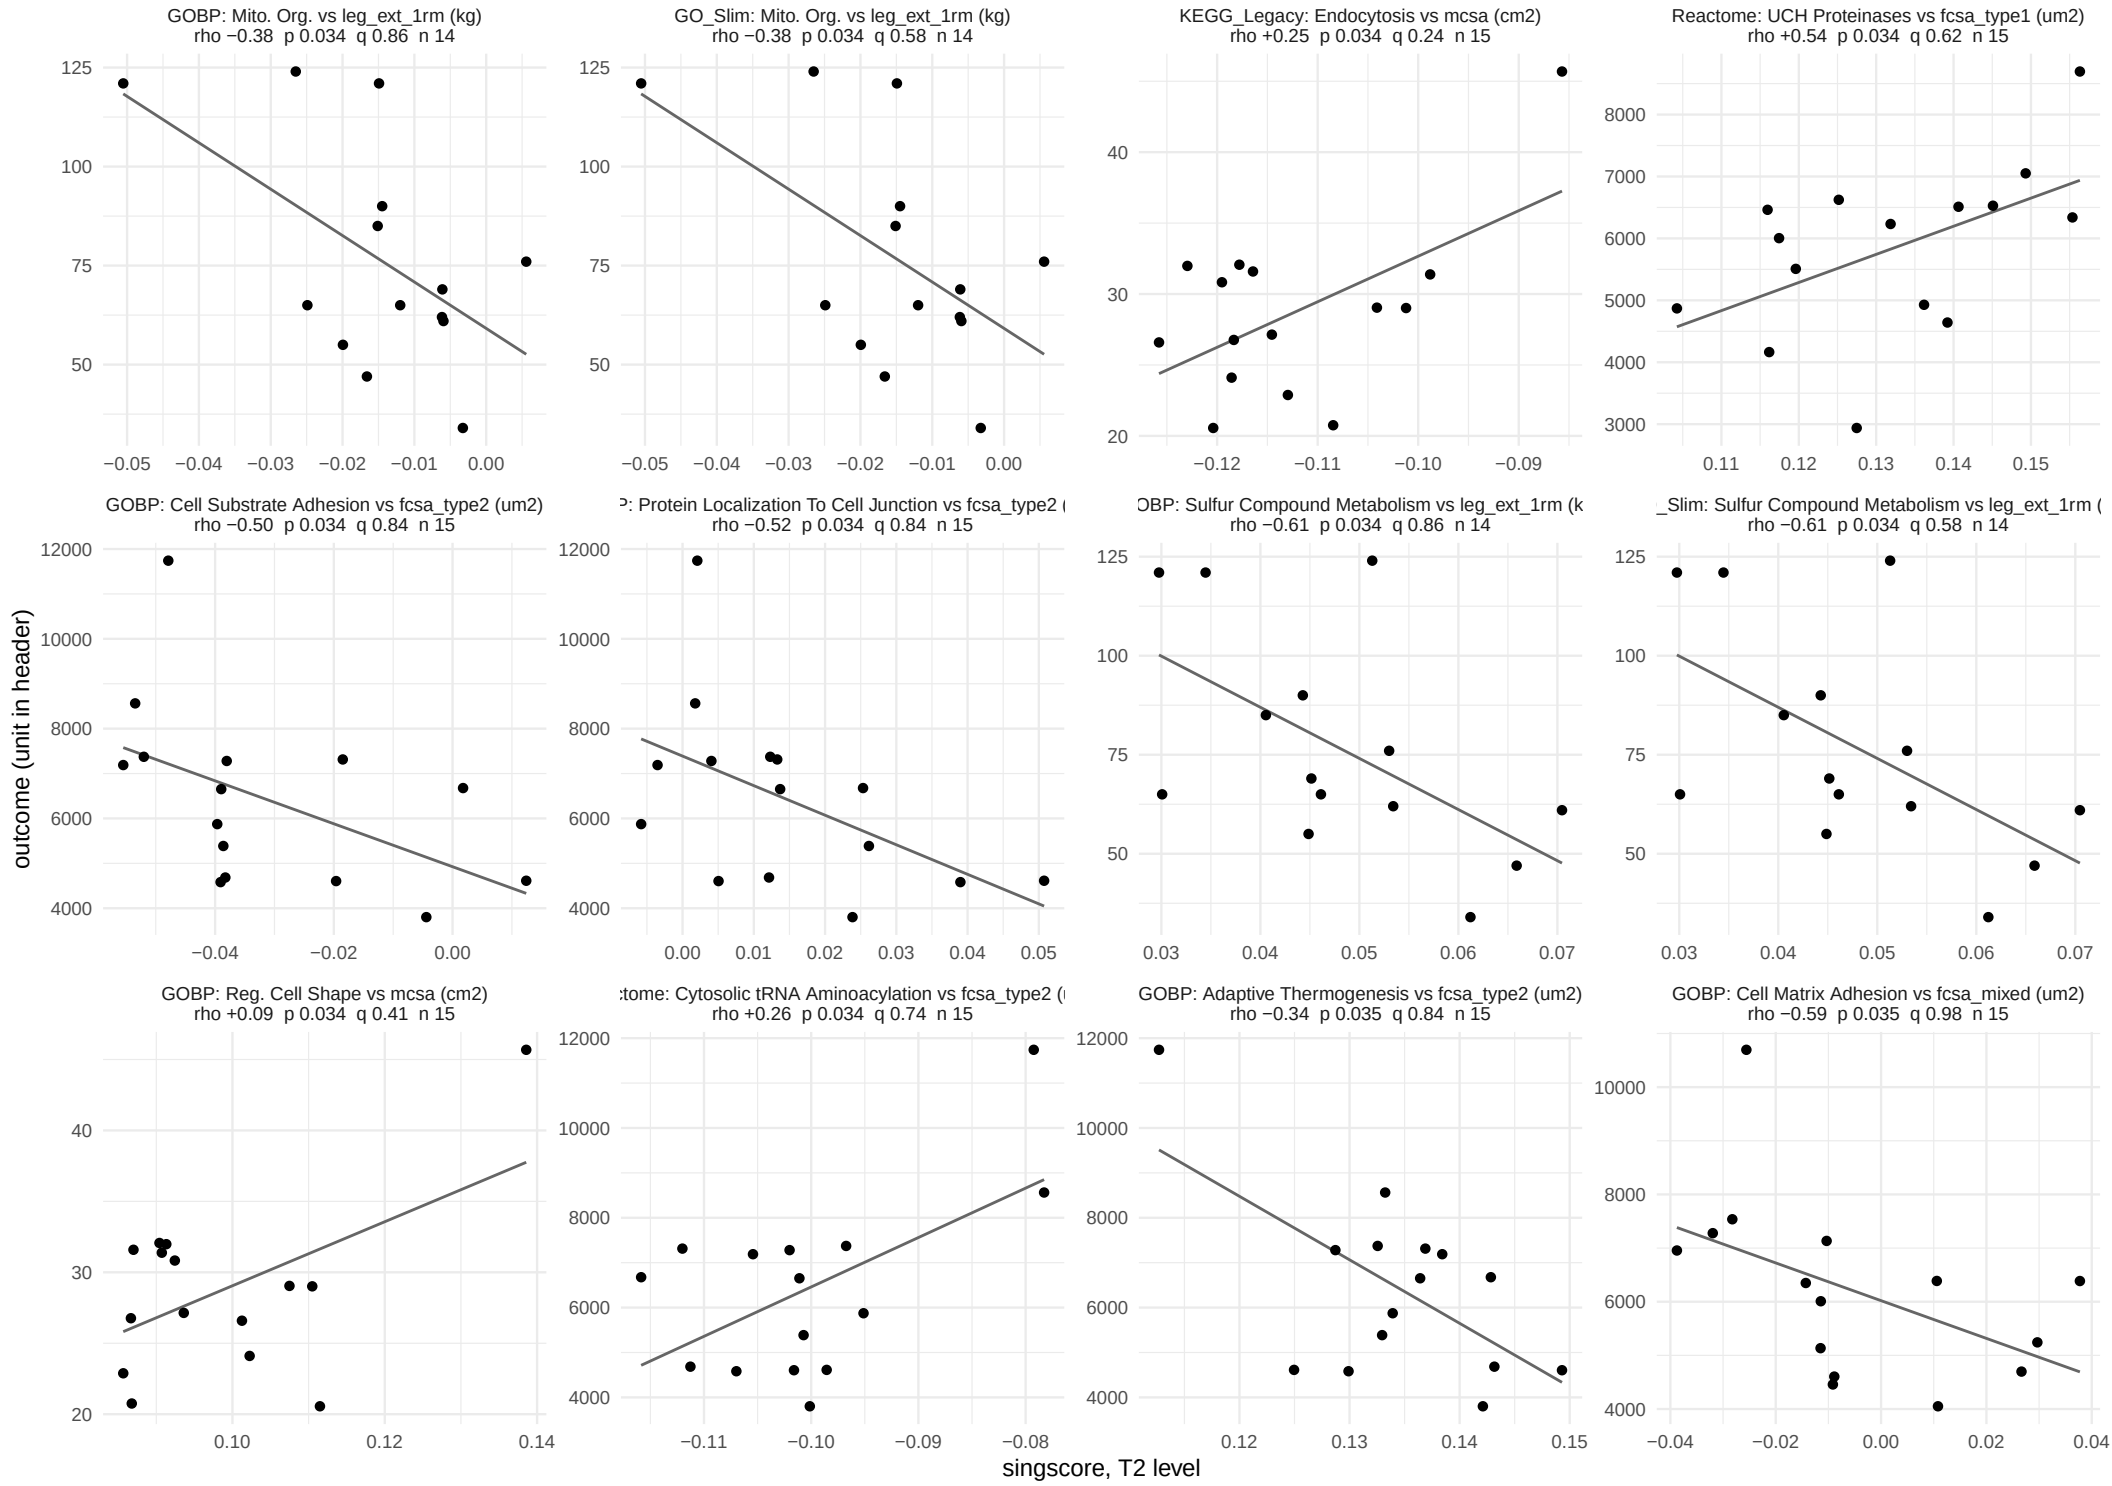

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, post_level window


380 of 8268 feature−outcome pairs at p < 0.05, 5 at BH < 0.05. Page 23 of 32.

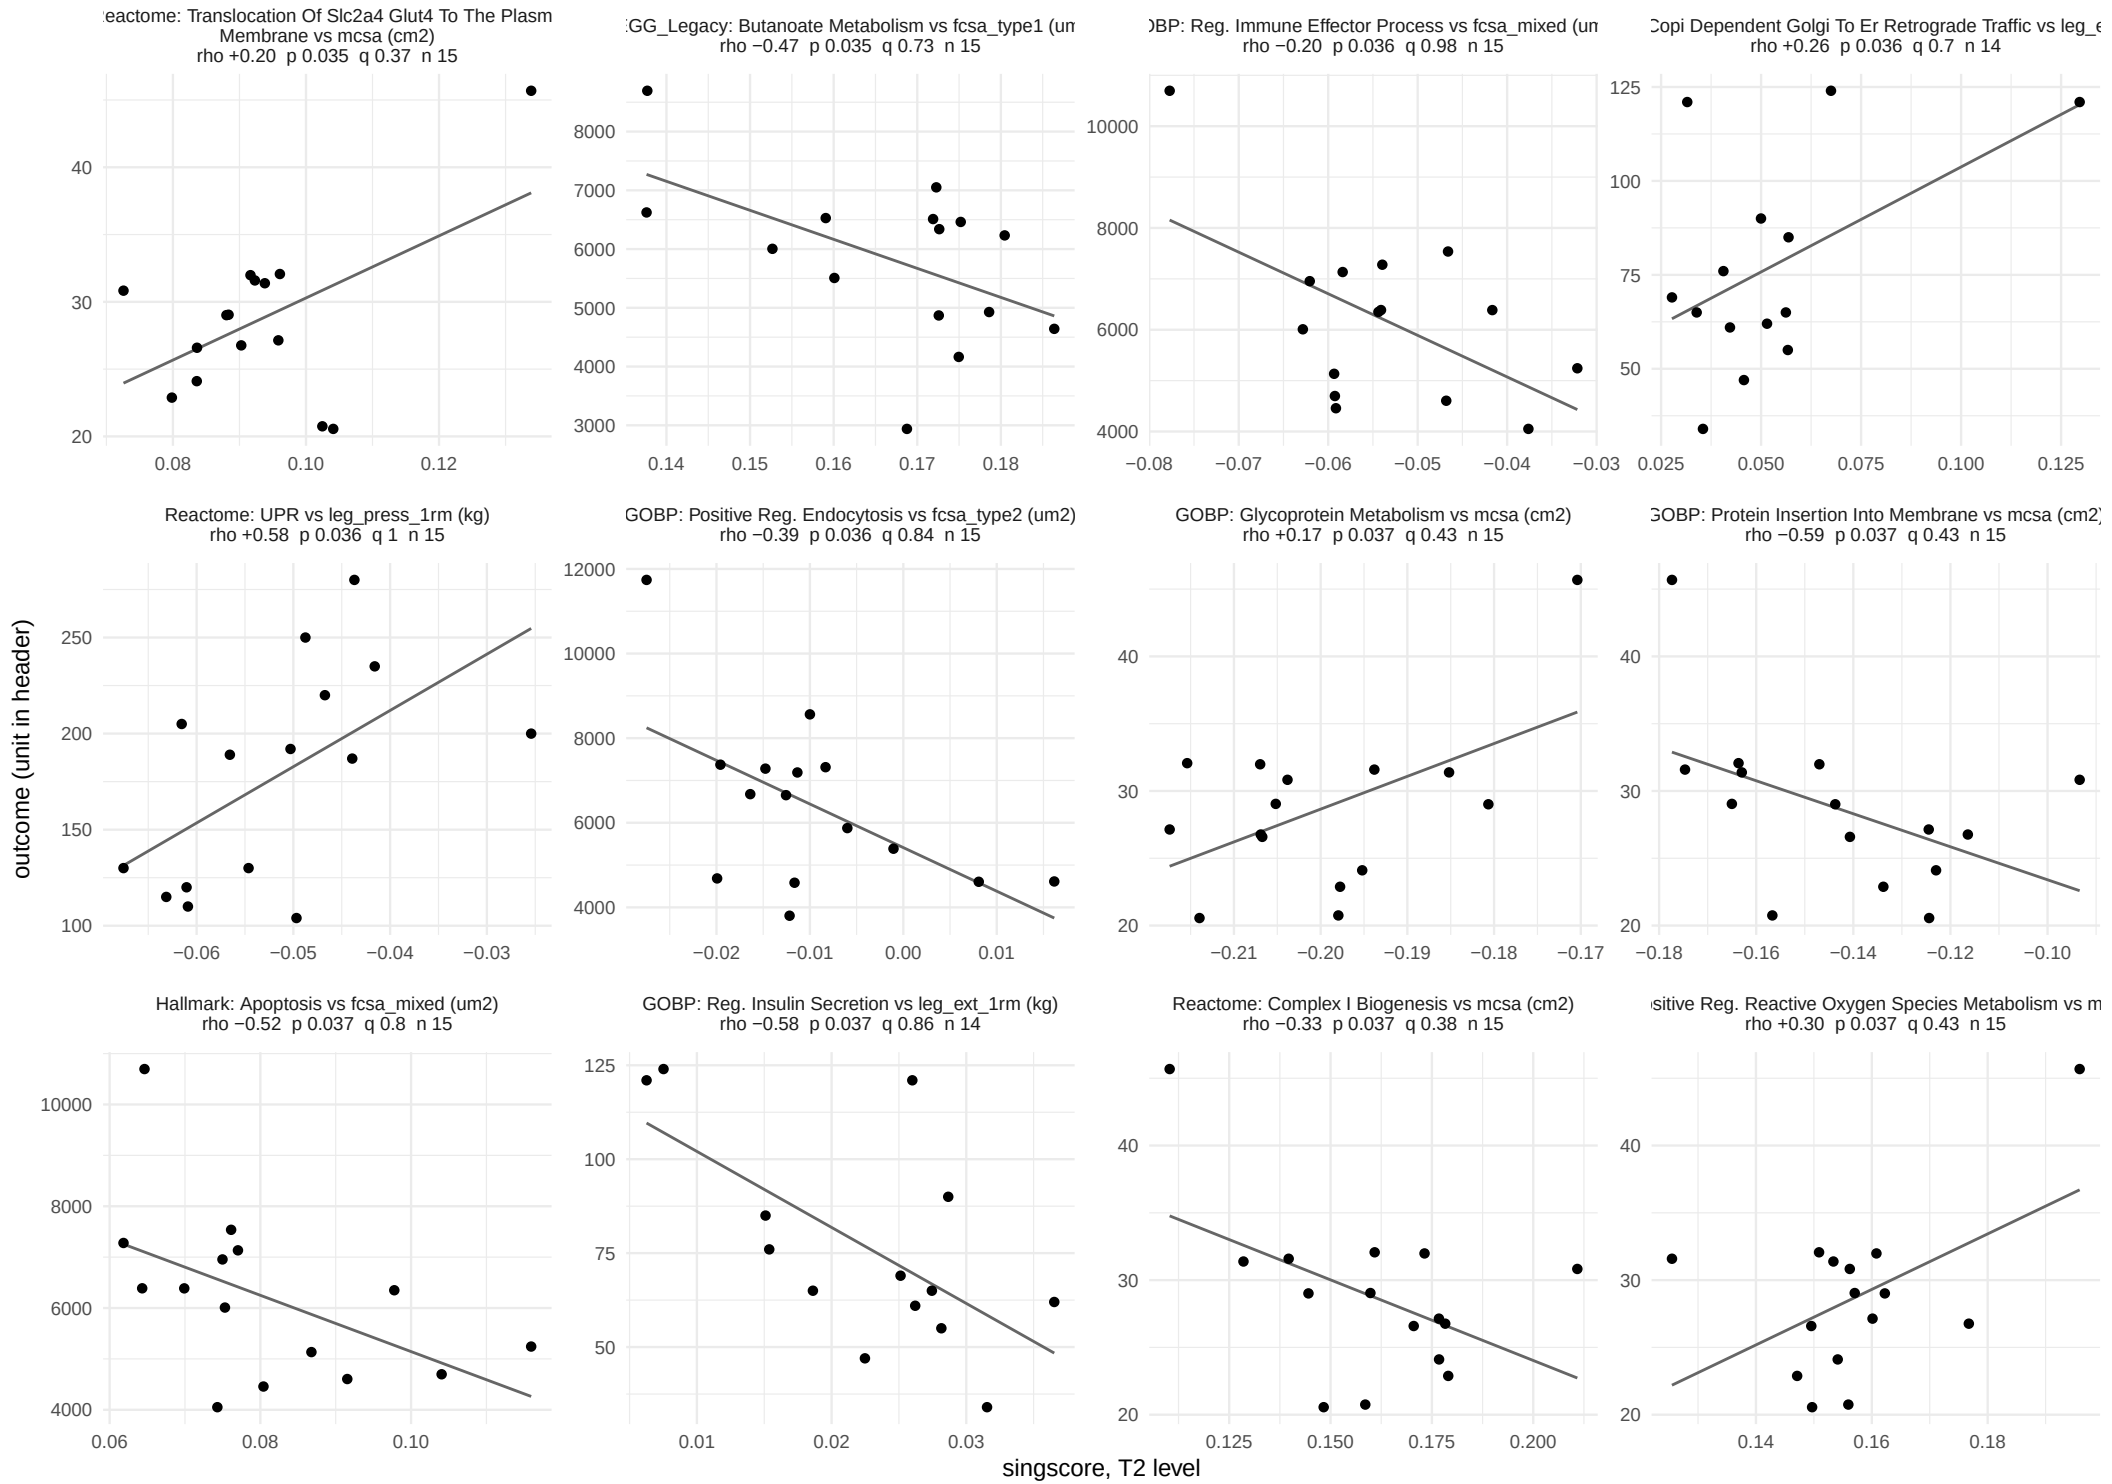

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, post_level window


380 of 8268 feature−outcome pairs at p < 0.05, 5 at BH < 0.05. Page 24 of 32.

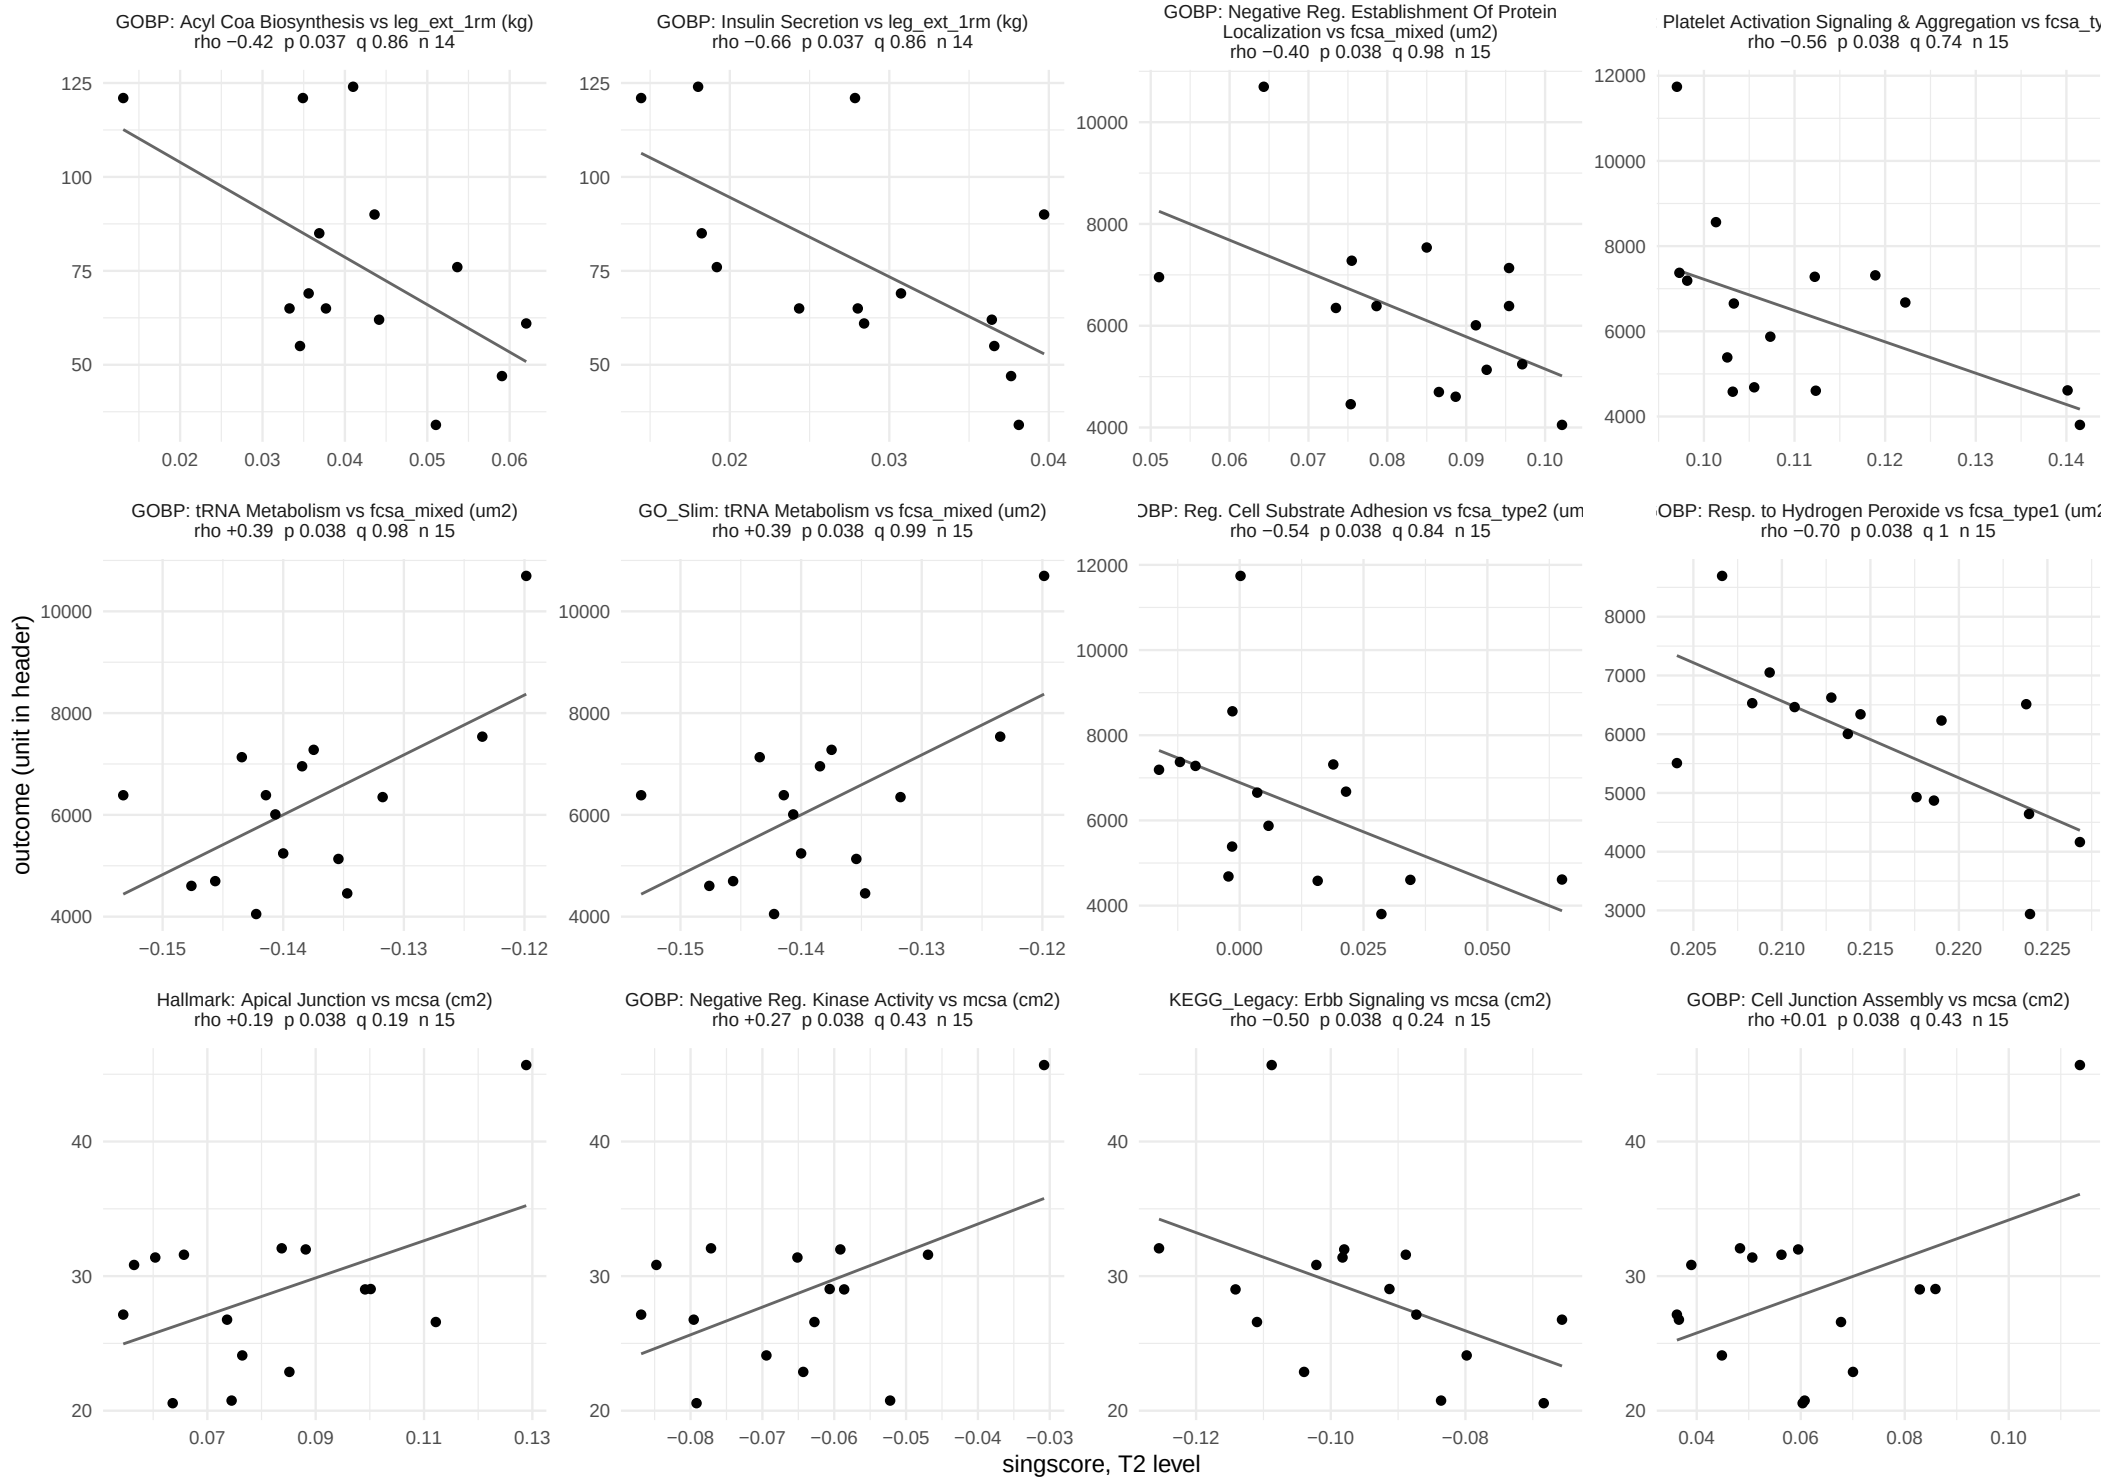

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, post_level window


380 of 8268 feature−outcome pairs at p < 0.05, 5 at BH < 0.05. Page 25 of 32.

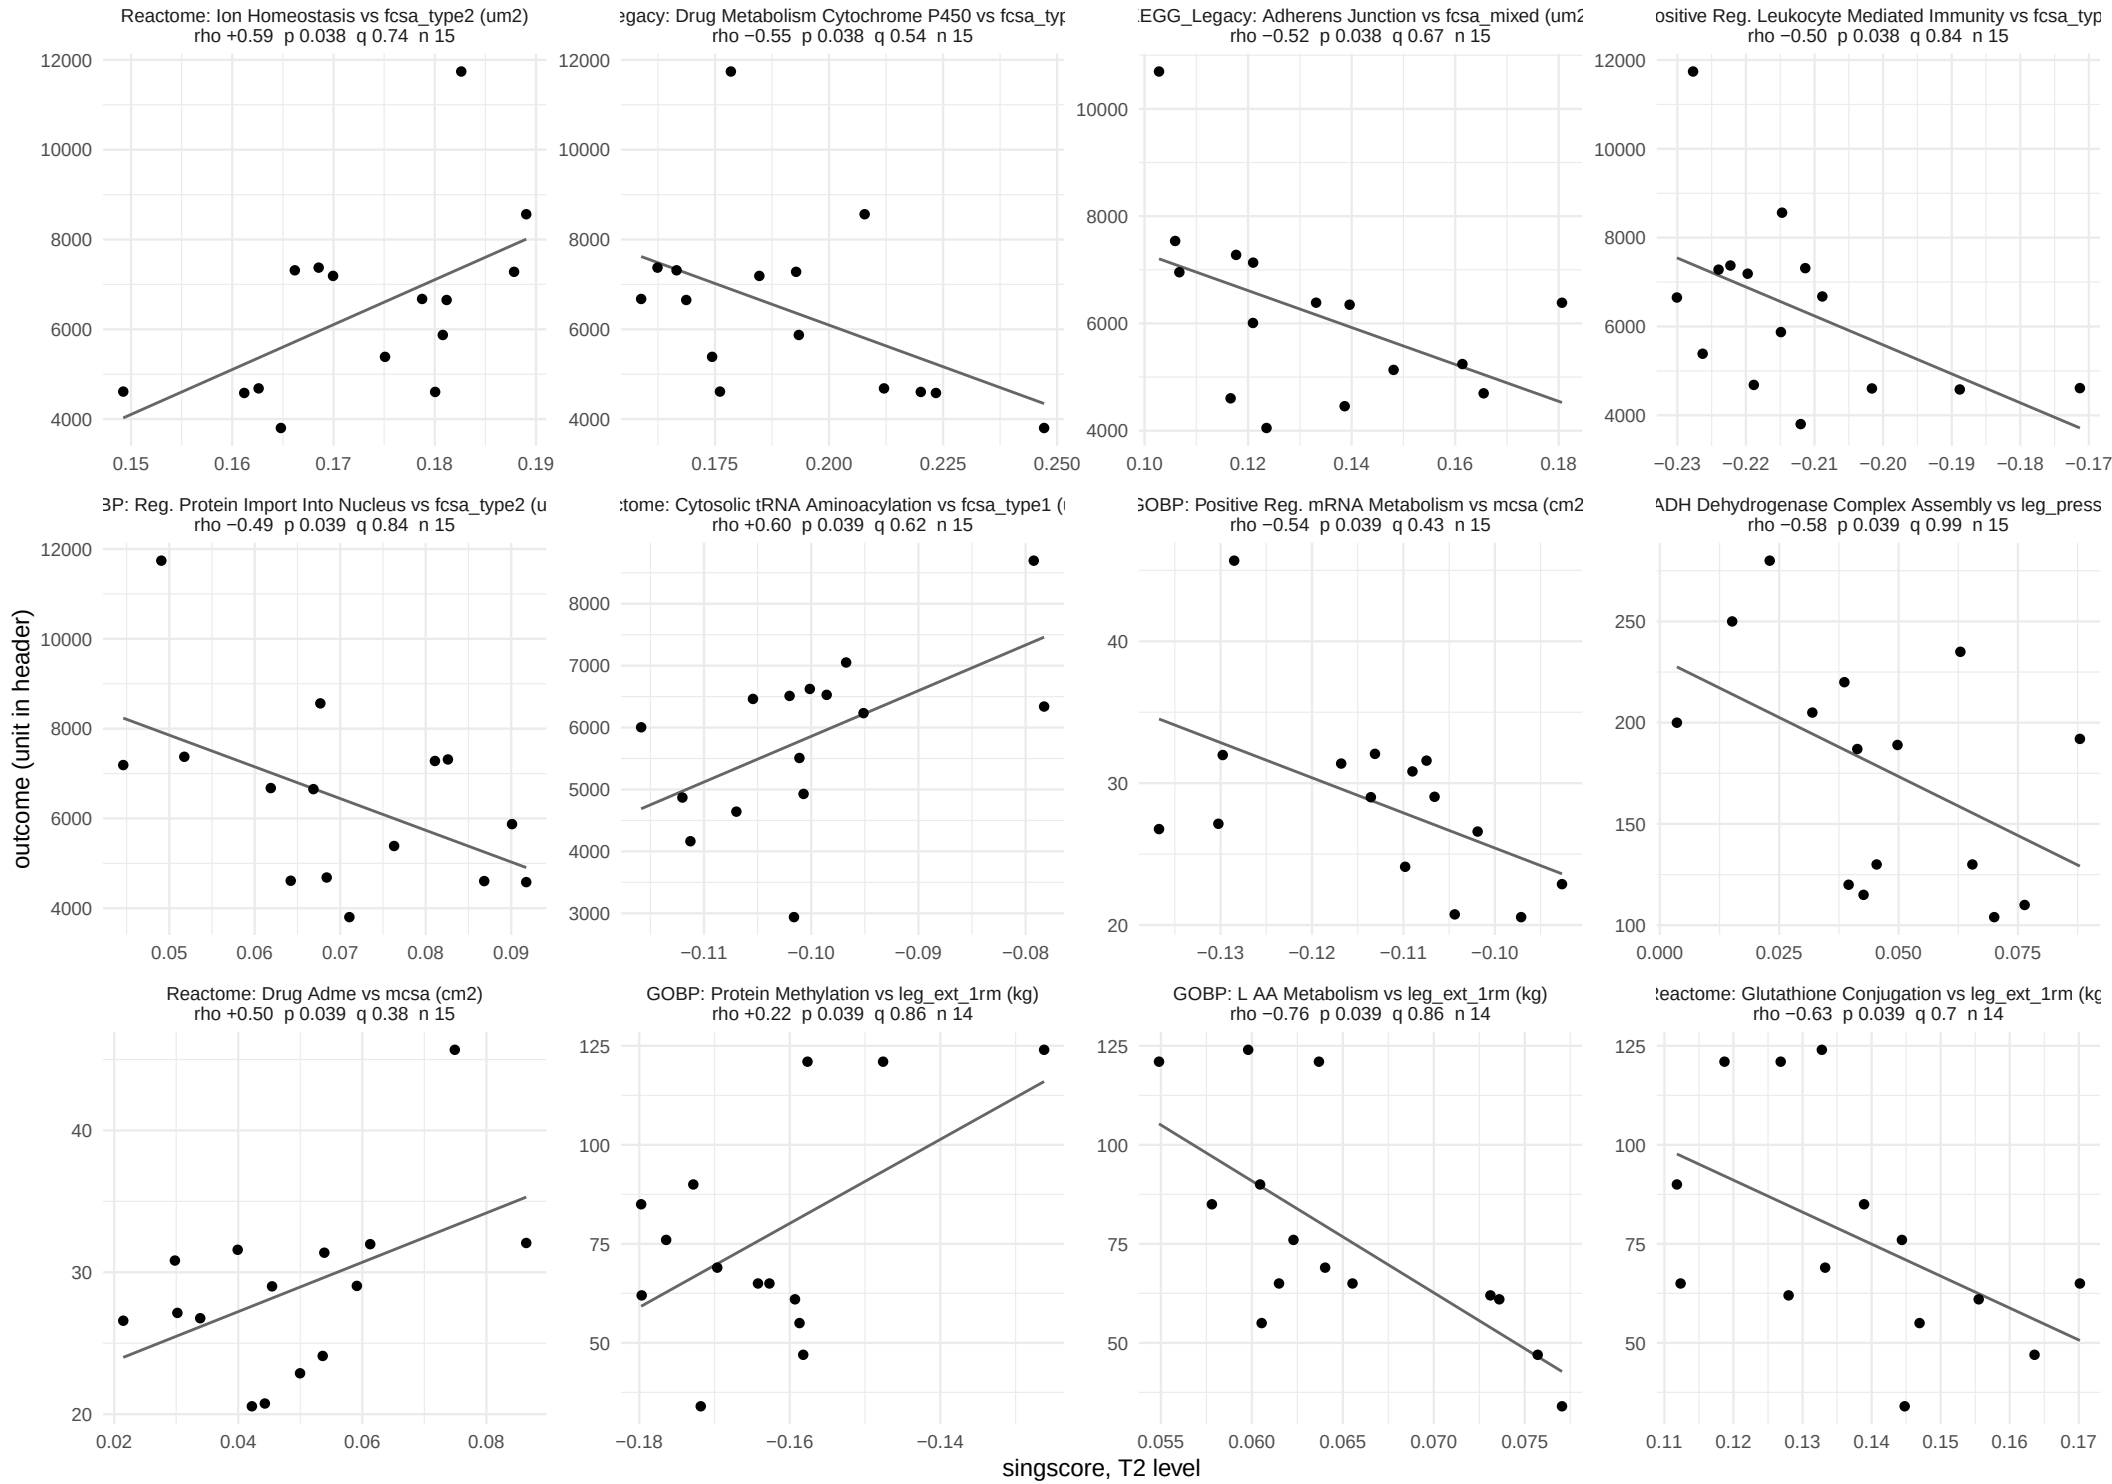

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, post_level window


380 of 8268 feature−outcome pairs at p < 0.05, 5 at BH < 0.05. Page 26 of 32.

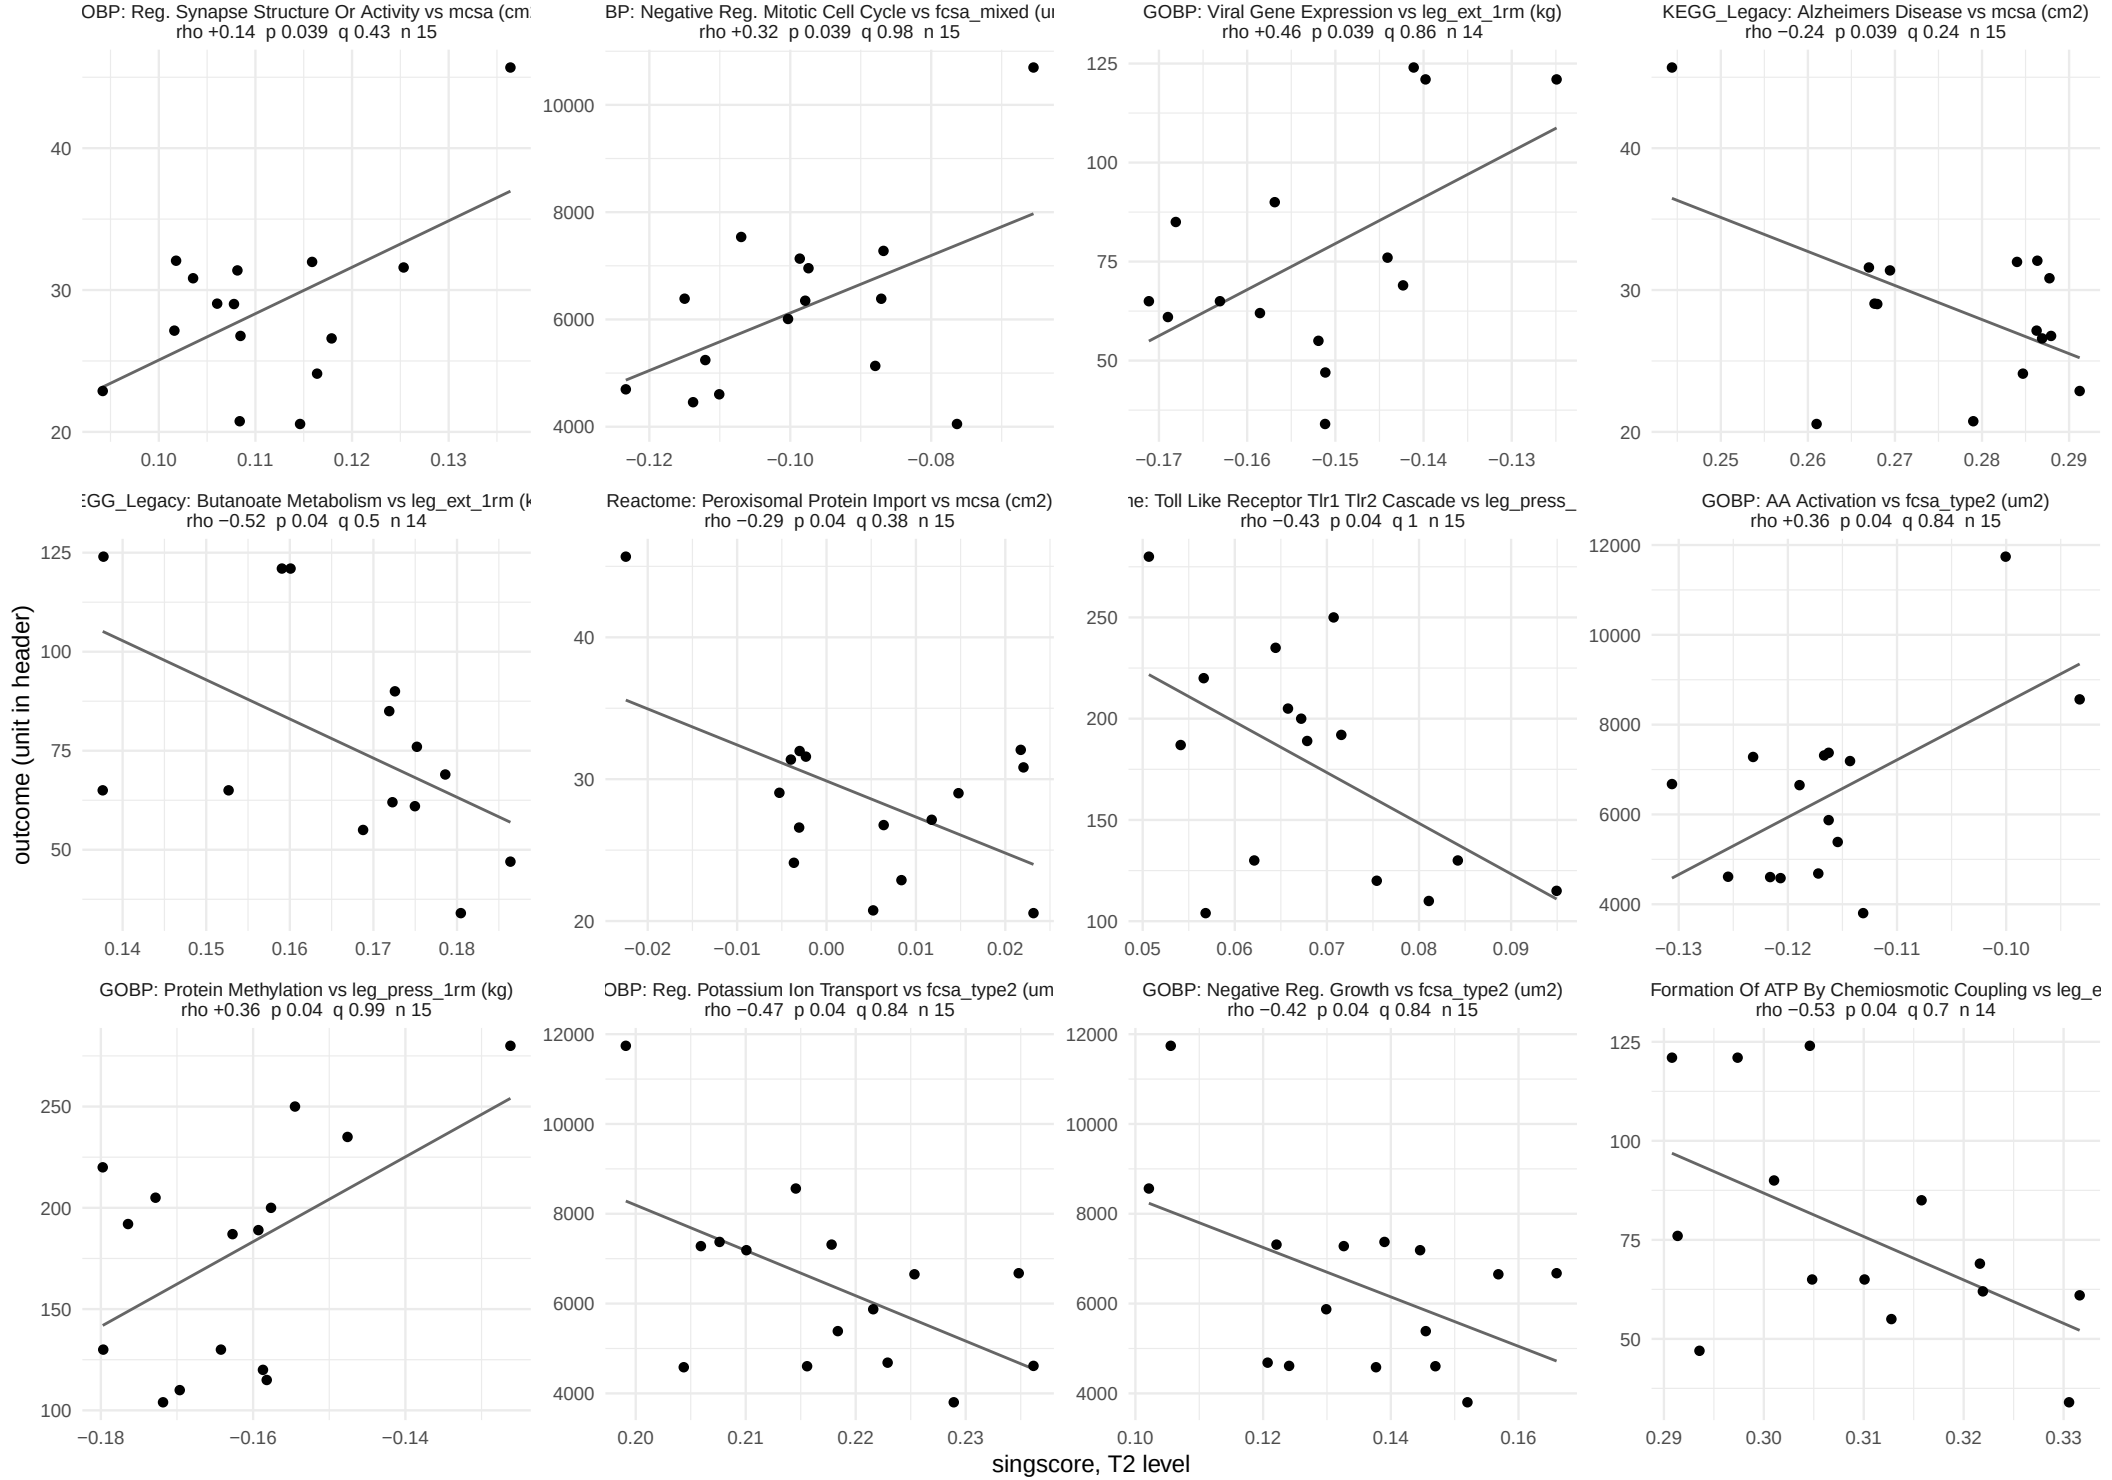

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, post_level window


380 of 8268 feature−outcome pairs at p < 0.05, 5 at BH < 0.05. Page 27 of 32.

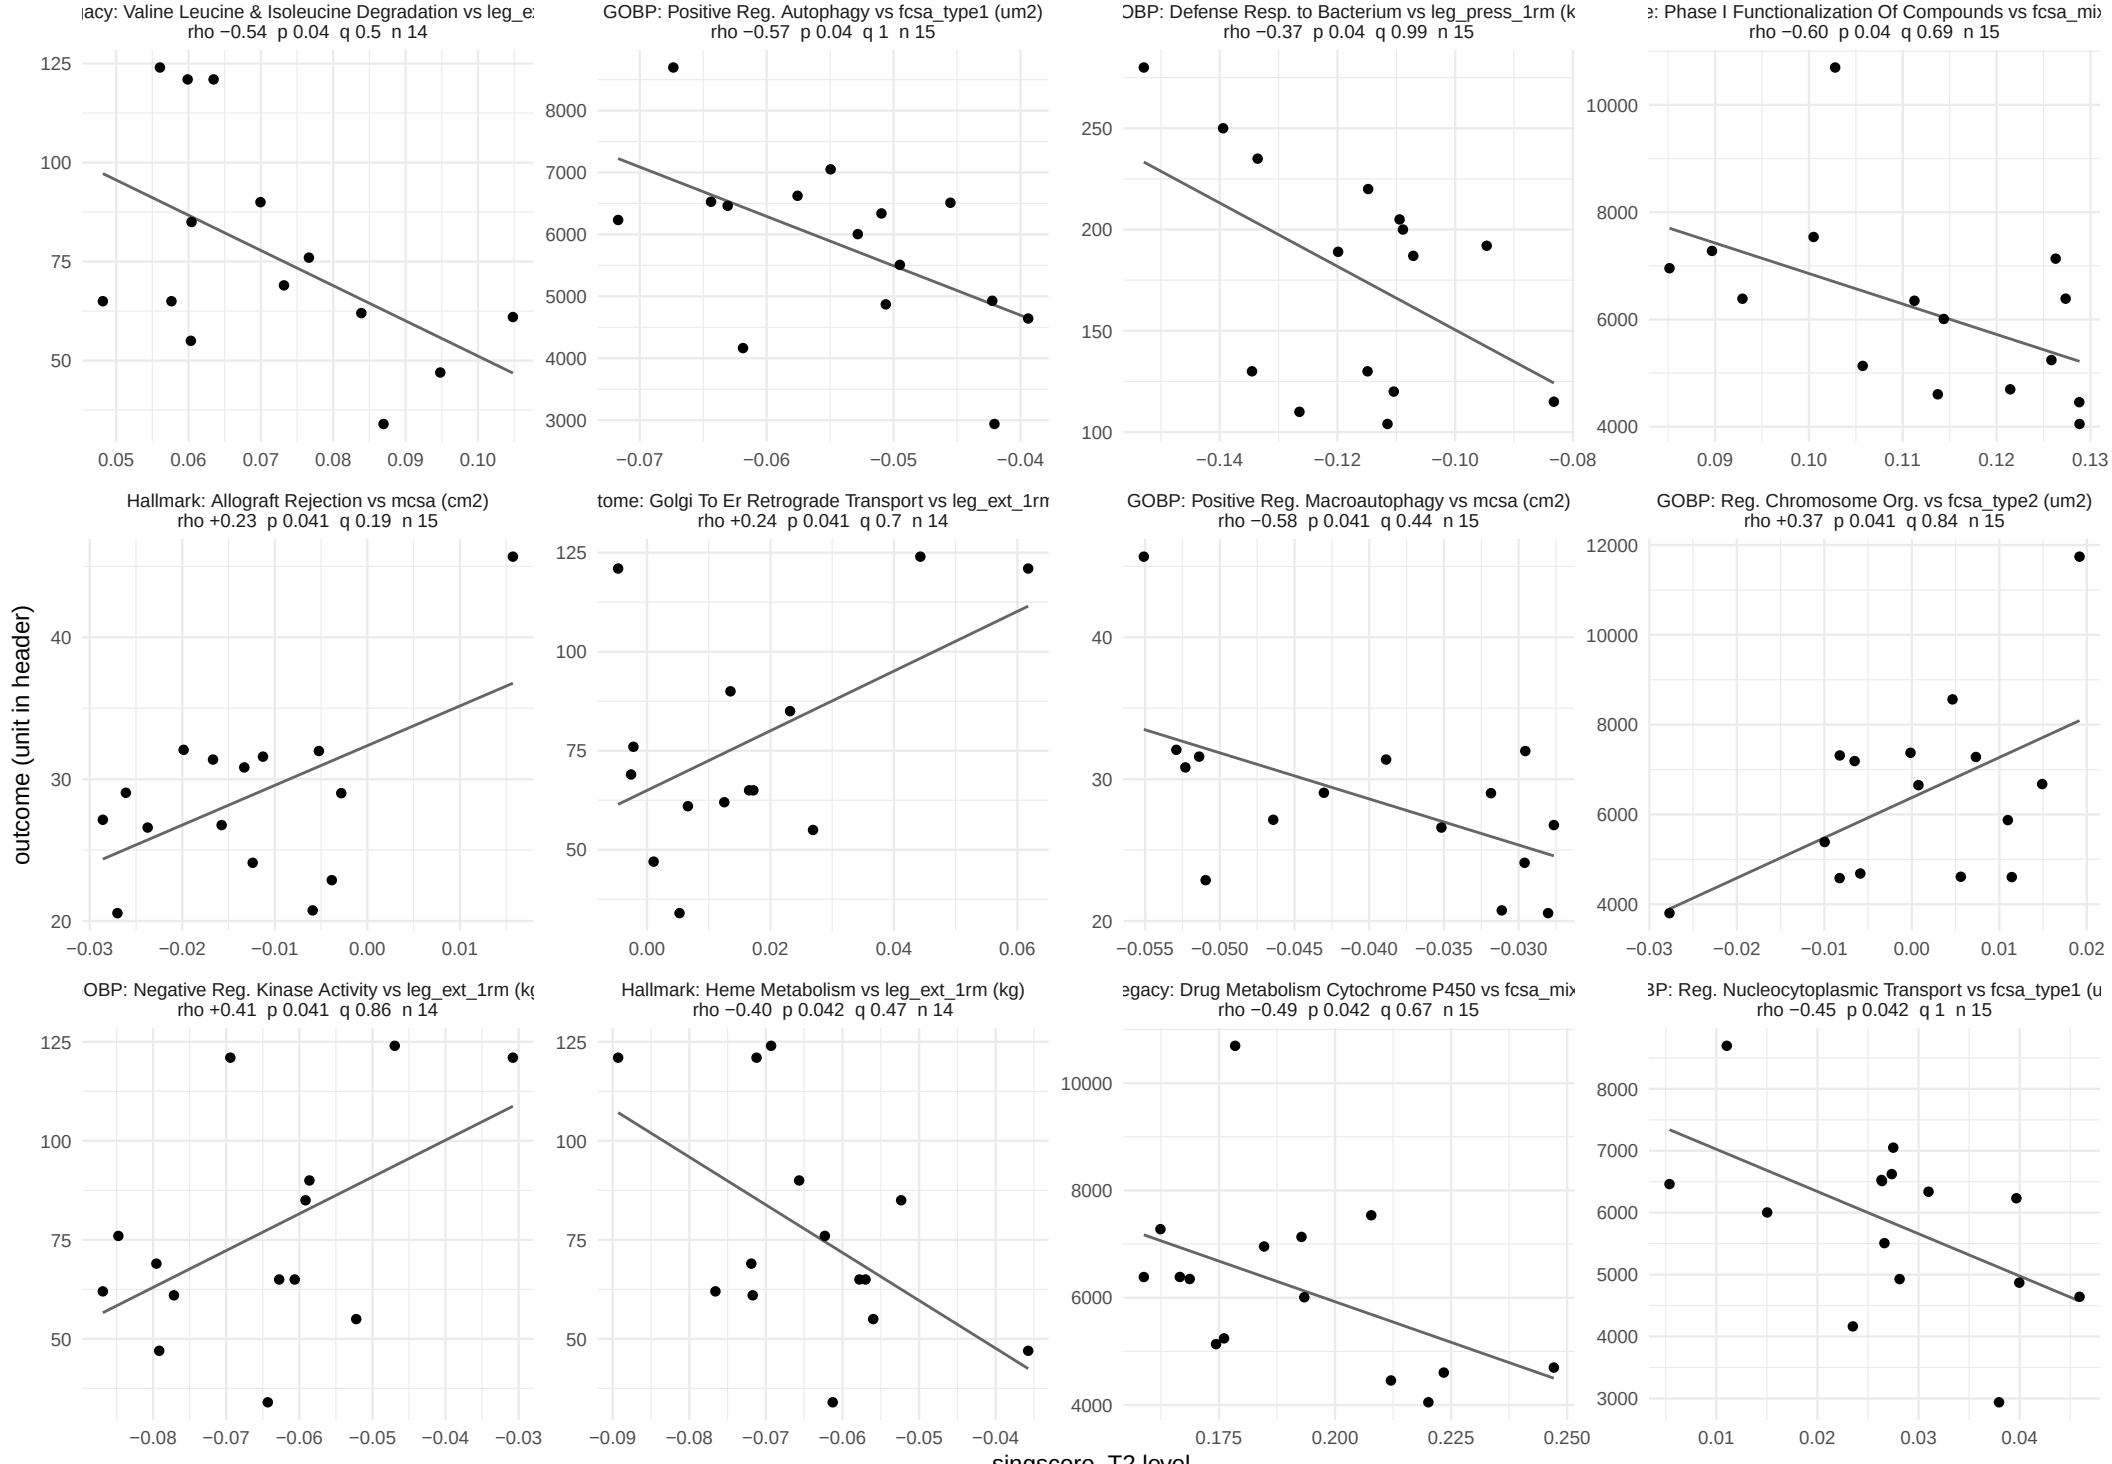

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, post_level window


380 of 8268 feature−outcome pairs at p < 0.05, 5 at BH < 0.05. Page 28 of 32.

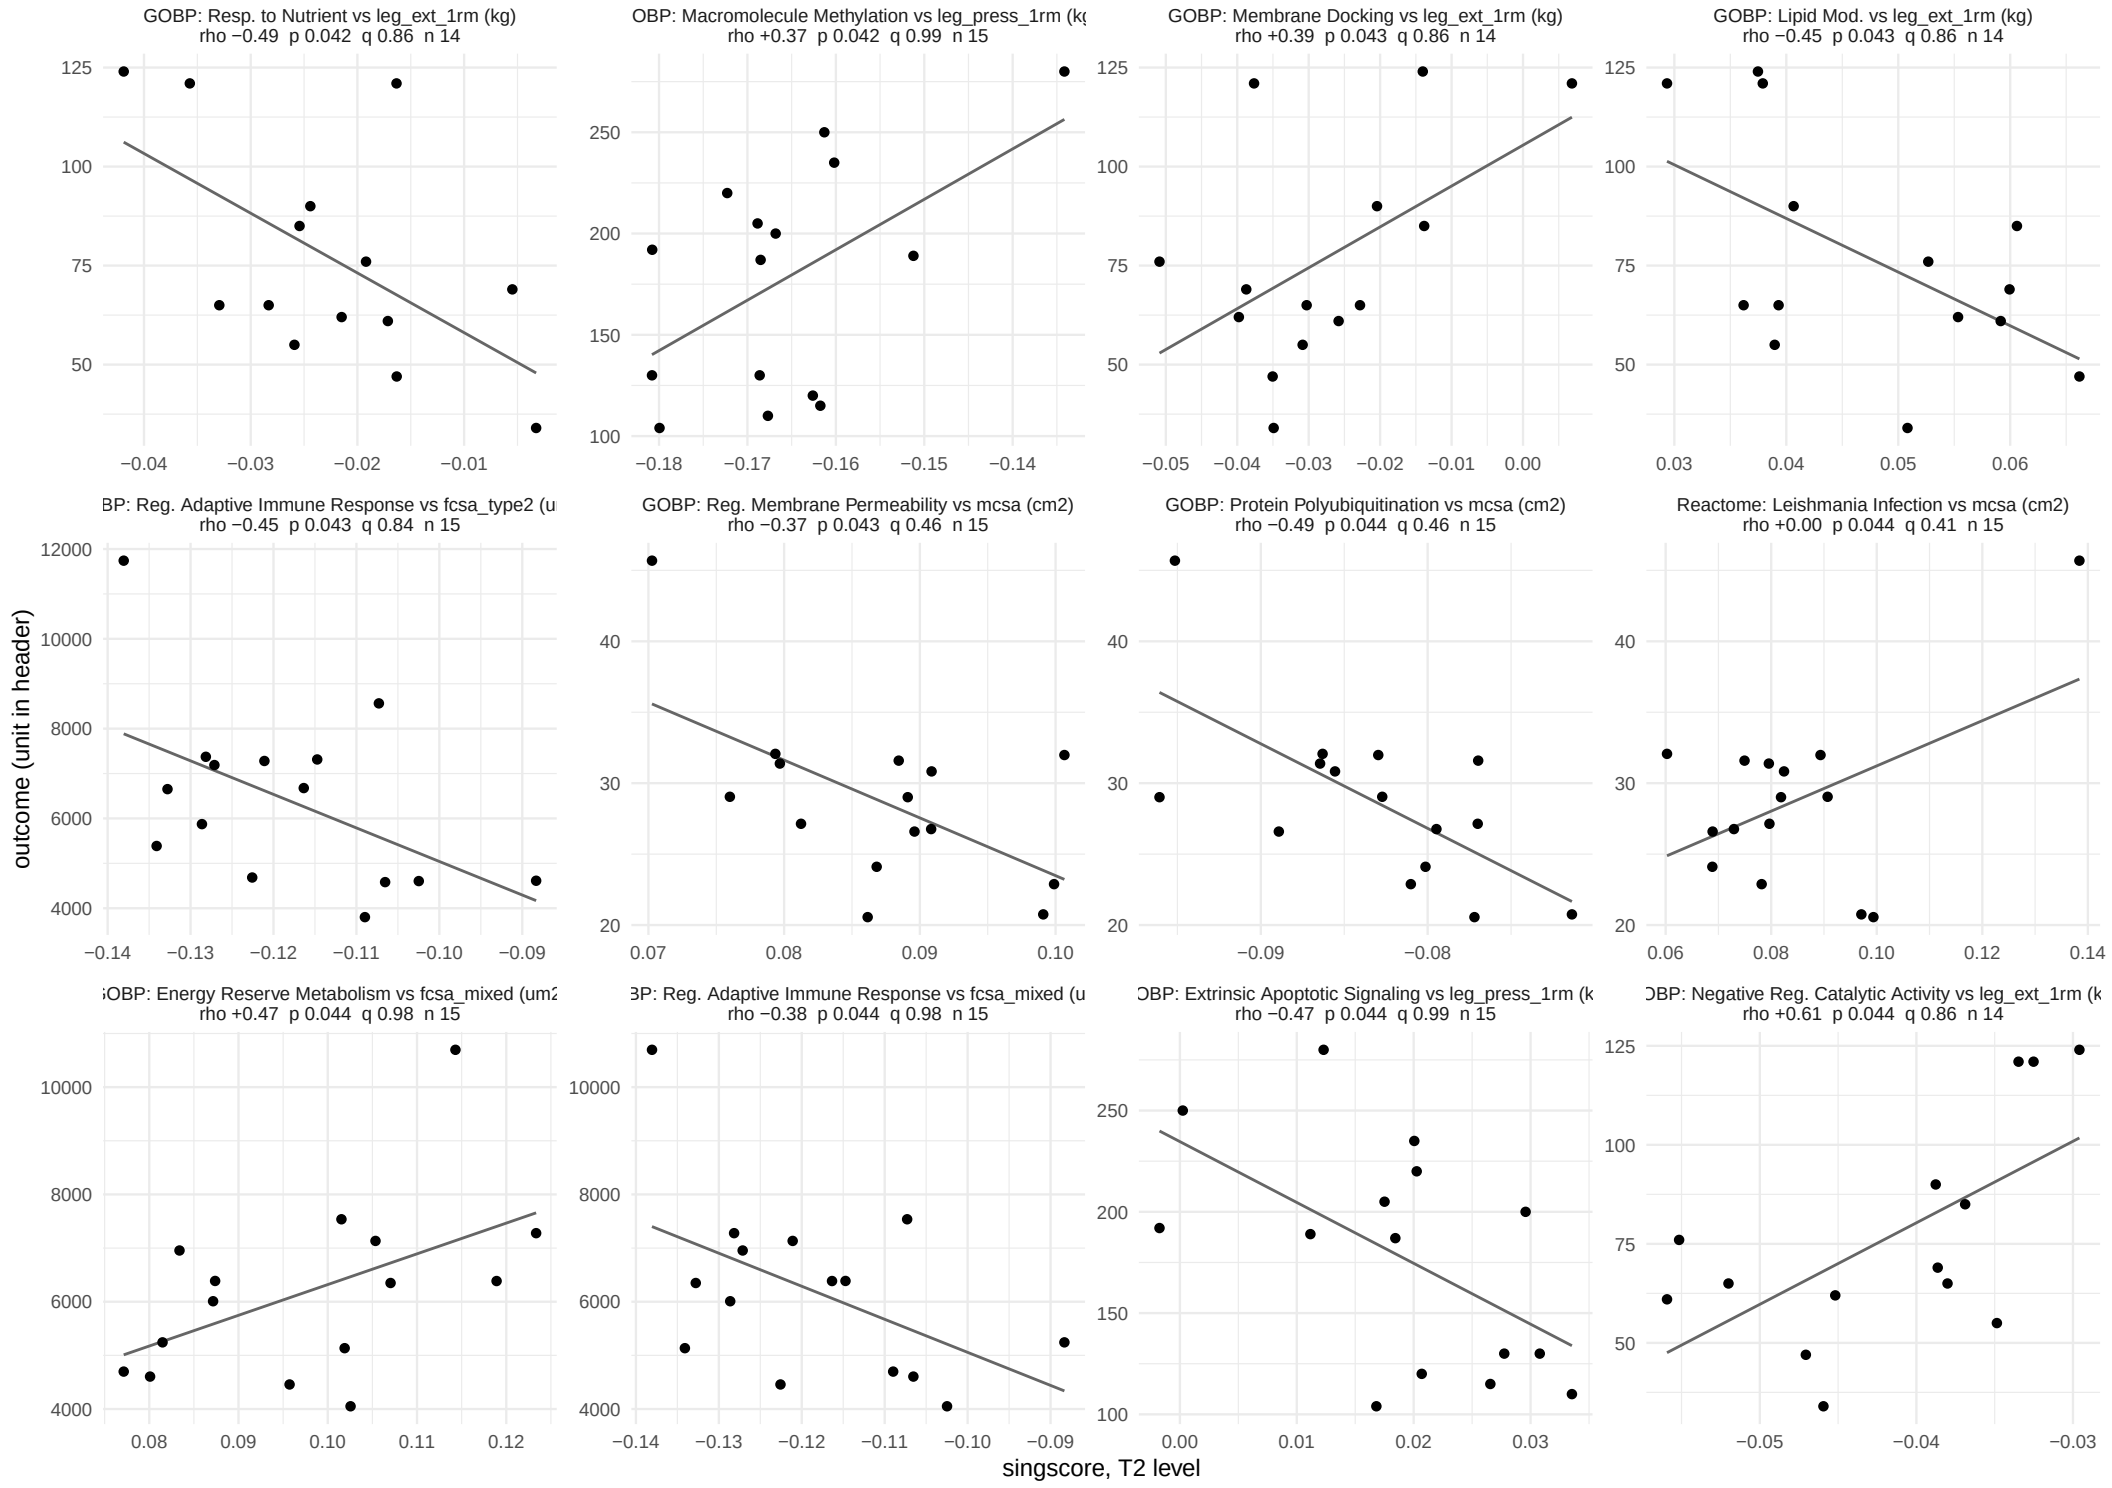

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, post_level window


380 of 8268 feature−outcome pairs at p < 0.05, 5 at BH < 0.05. Page 29 of 32.

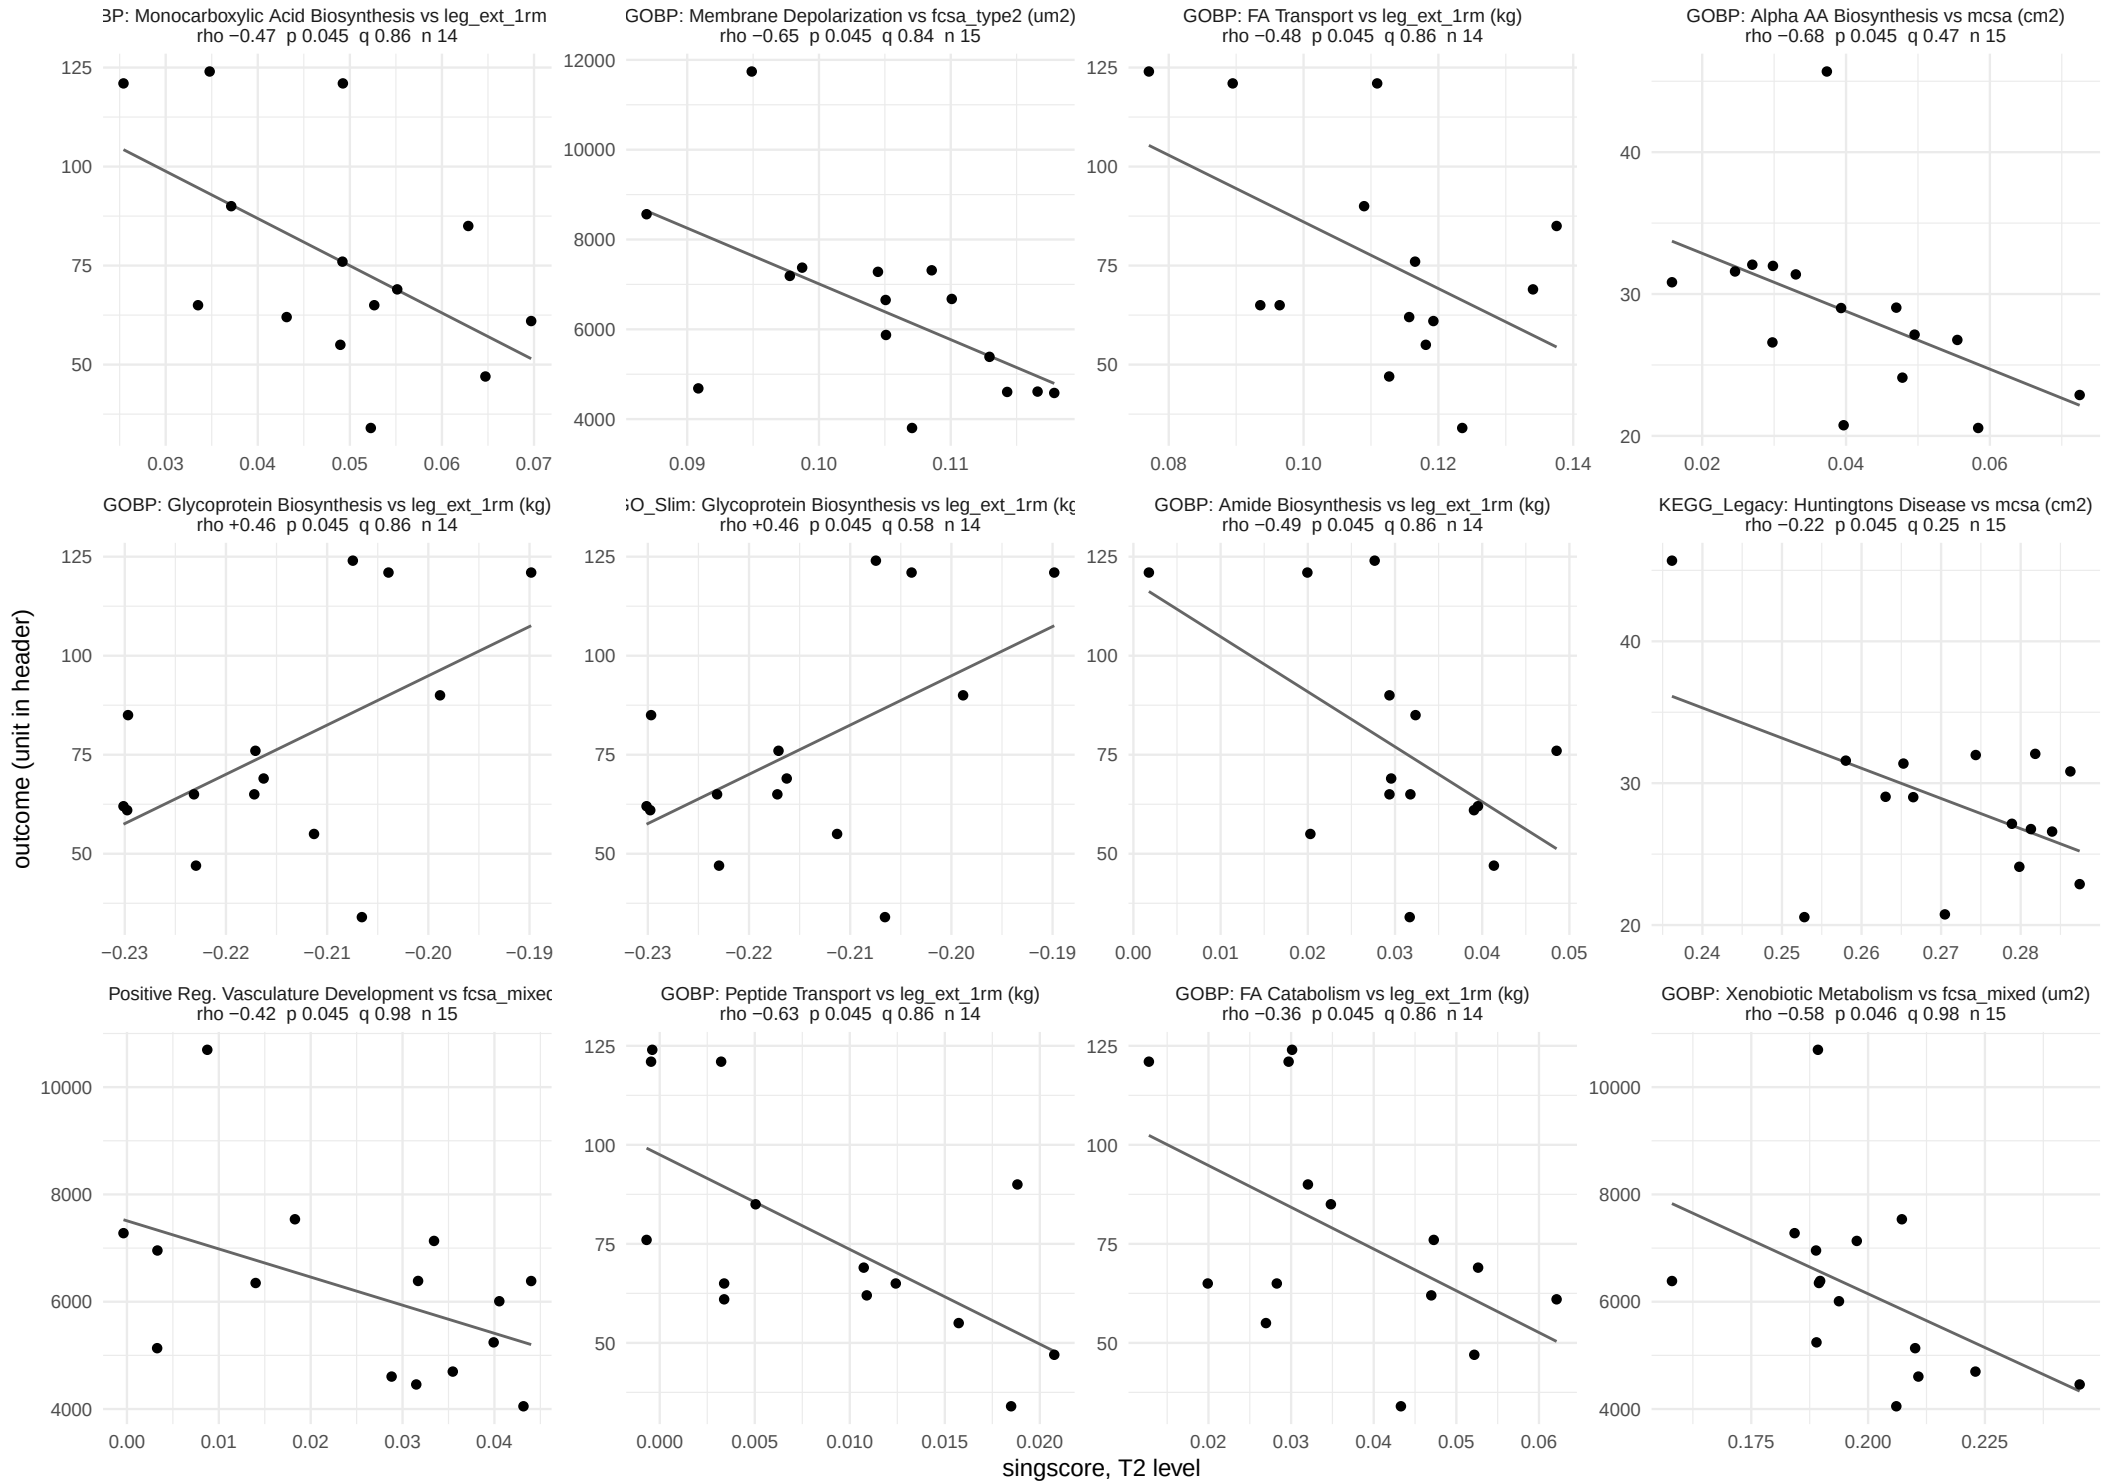

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, post_level window


380 of 8268 feature−outcome pairs at p < 0.05, 5 at BH < 0.05. Page 30 of 32.

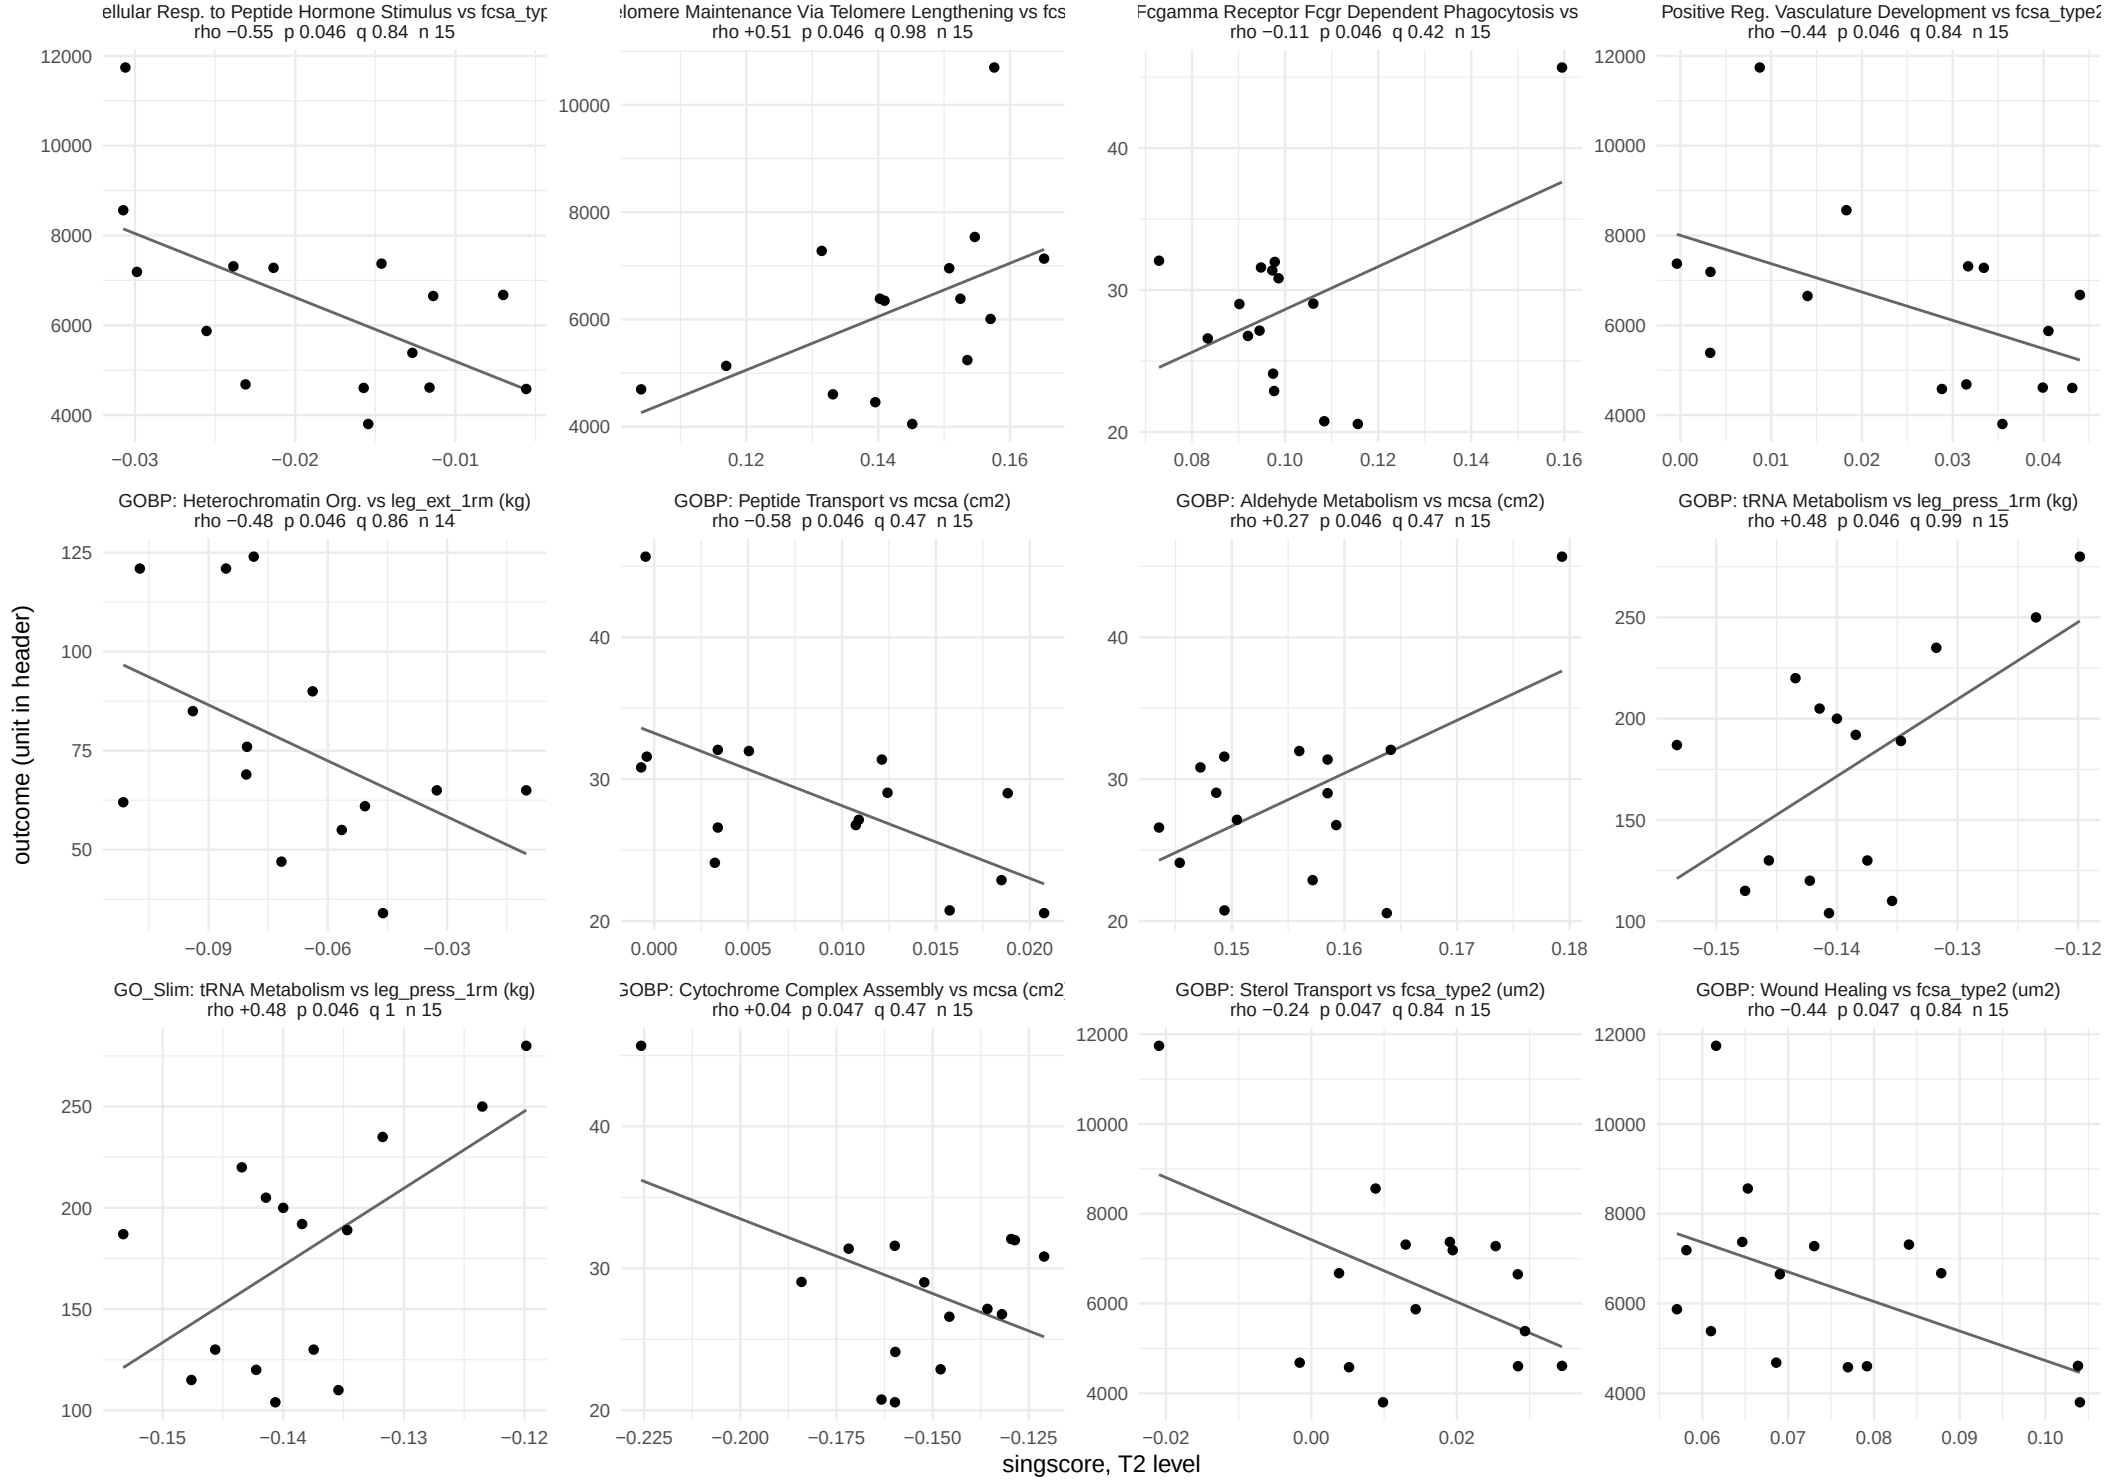

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, post_level window


380 of 8268 feature−outcome pairs at p < 0.05, 5 at BH < 0.05. Page 31 of 32.

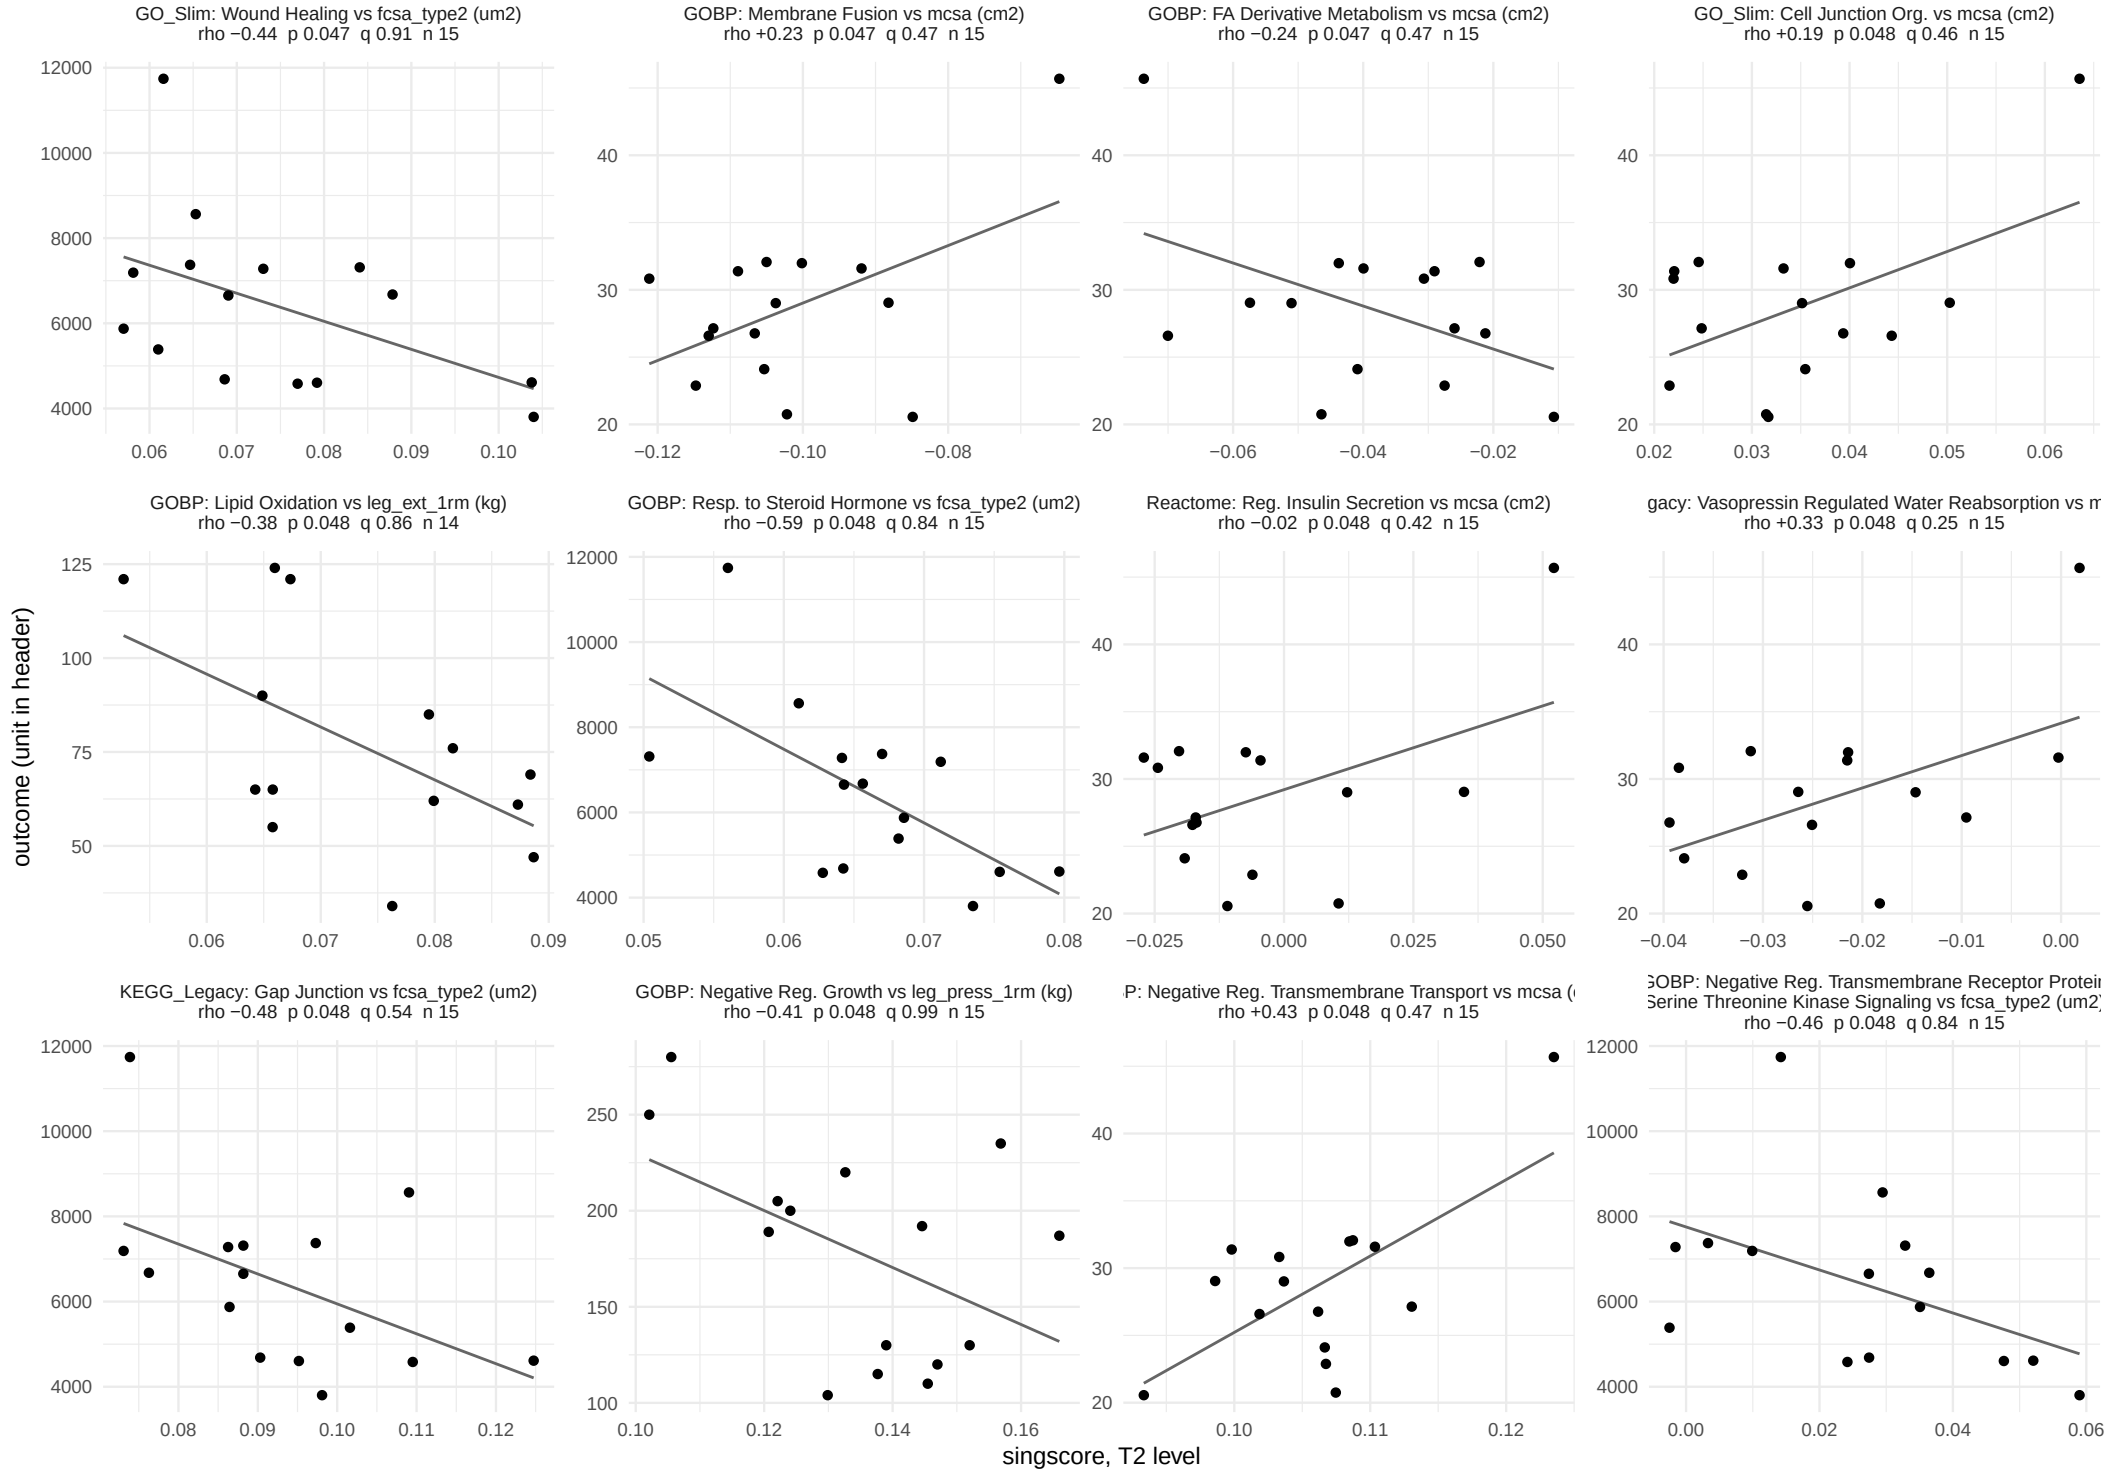

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, post_level window


380 of 8268 feature−outcome pairs at p < 0.05, 5 at BH < 0.05. Page 32 of 32.

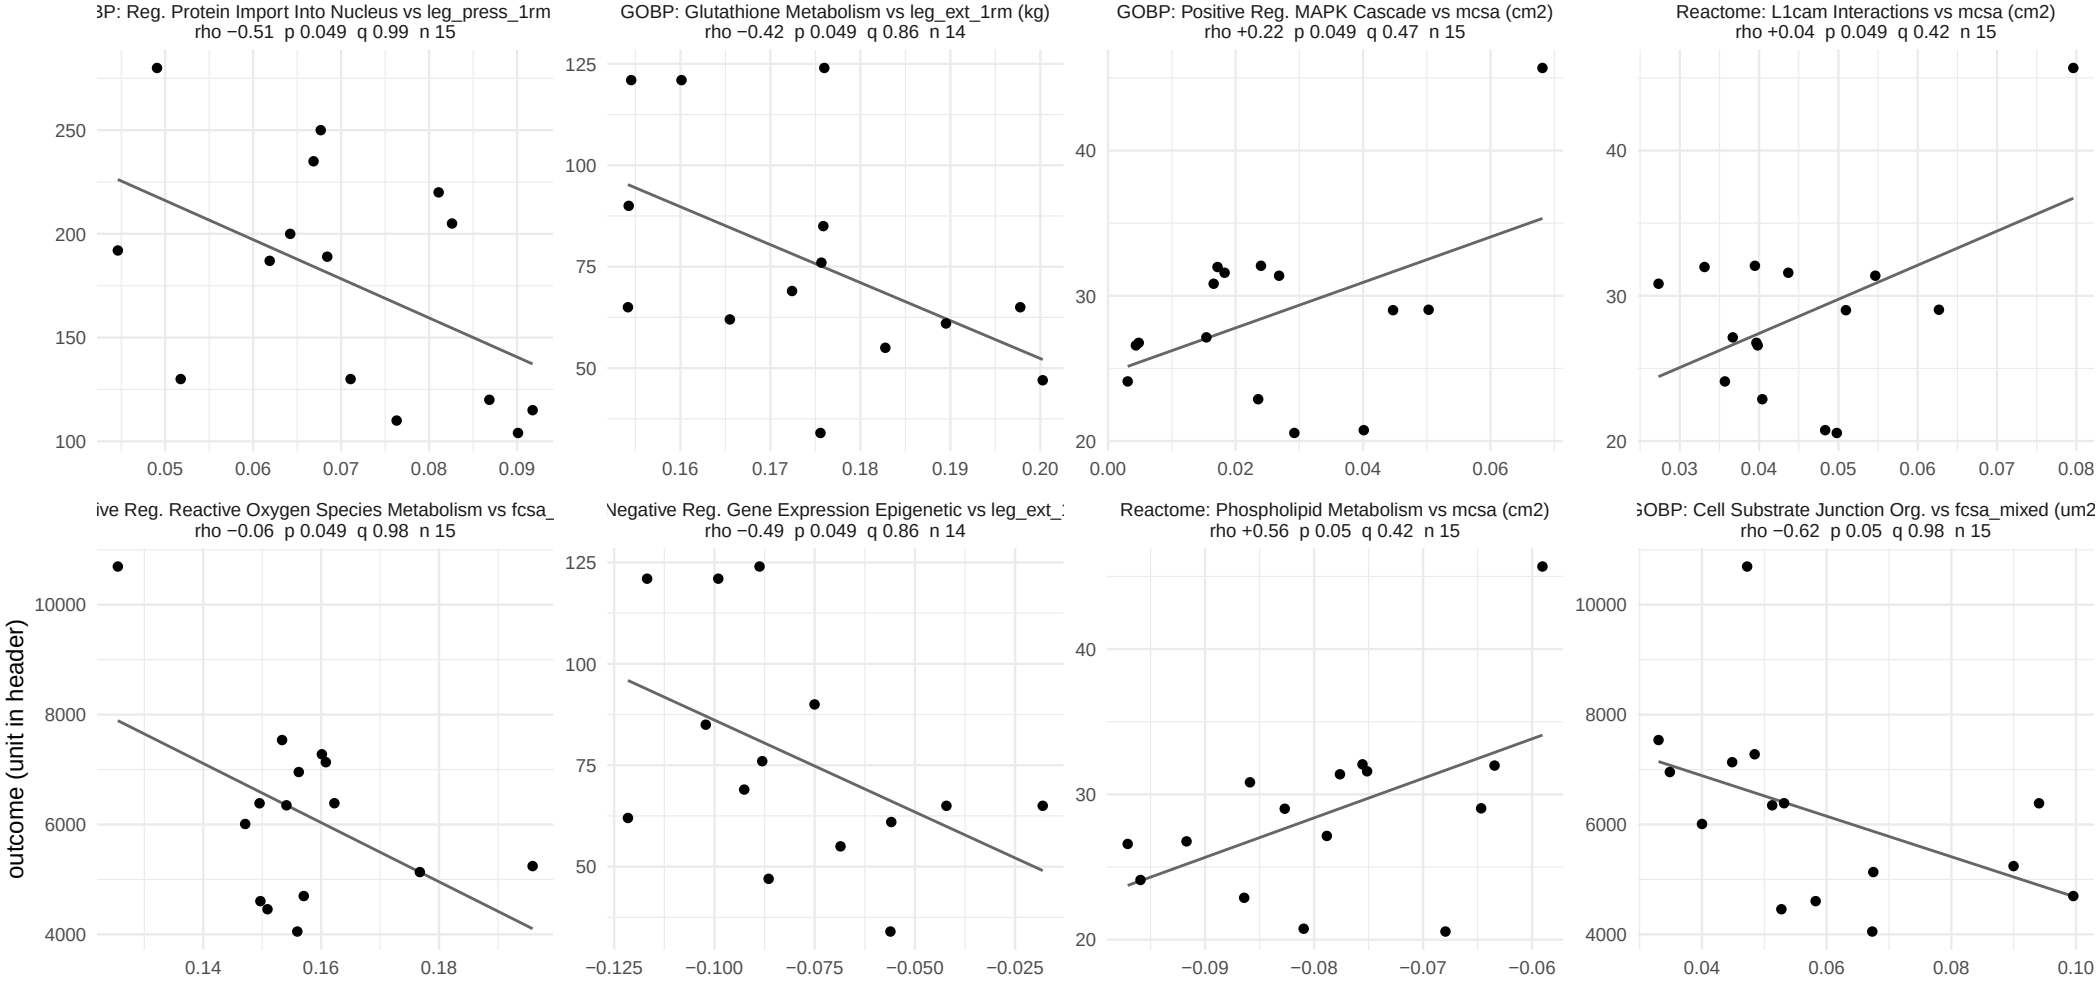

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, post_bout_level window


249 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 1 of 21.

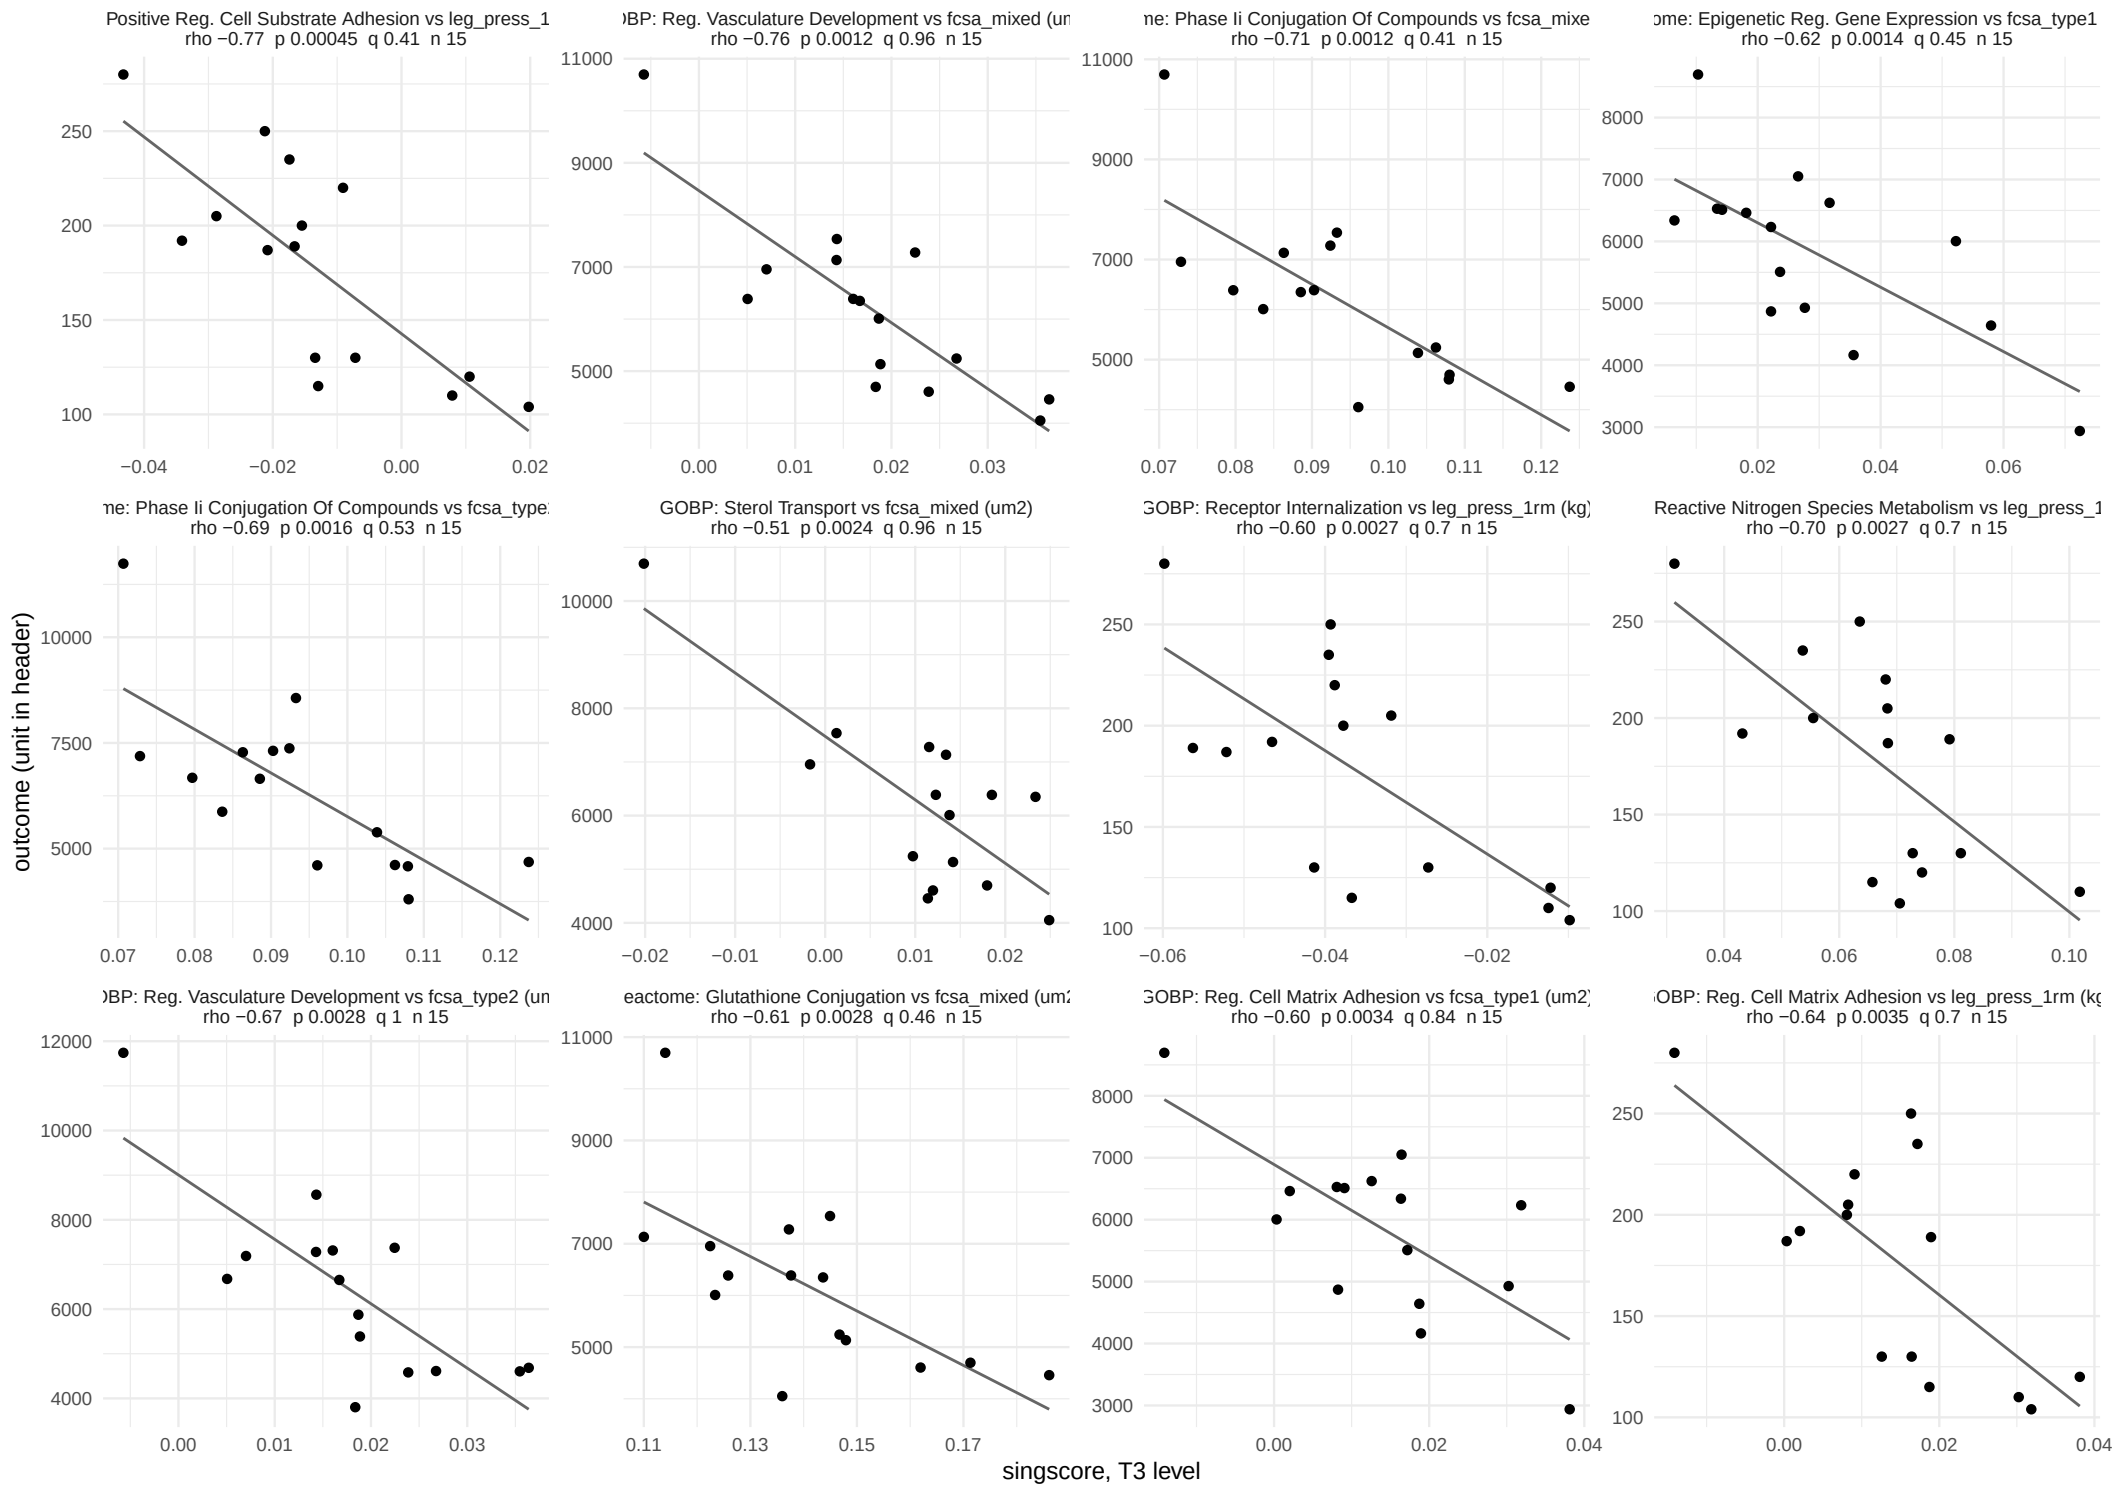

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, post_bout_level window


249 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 2 of 21.

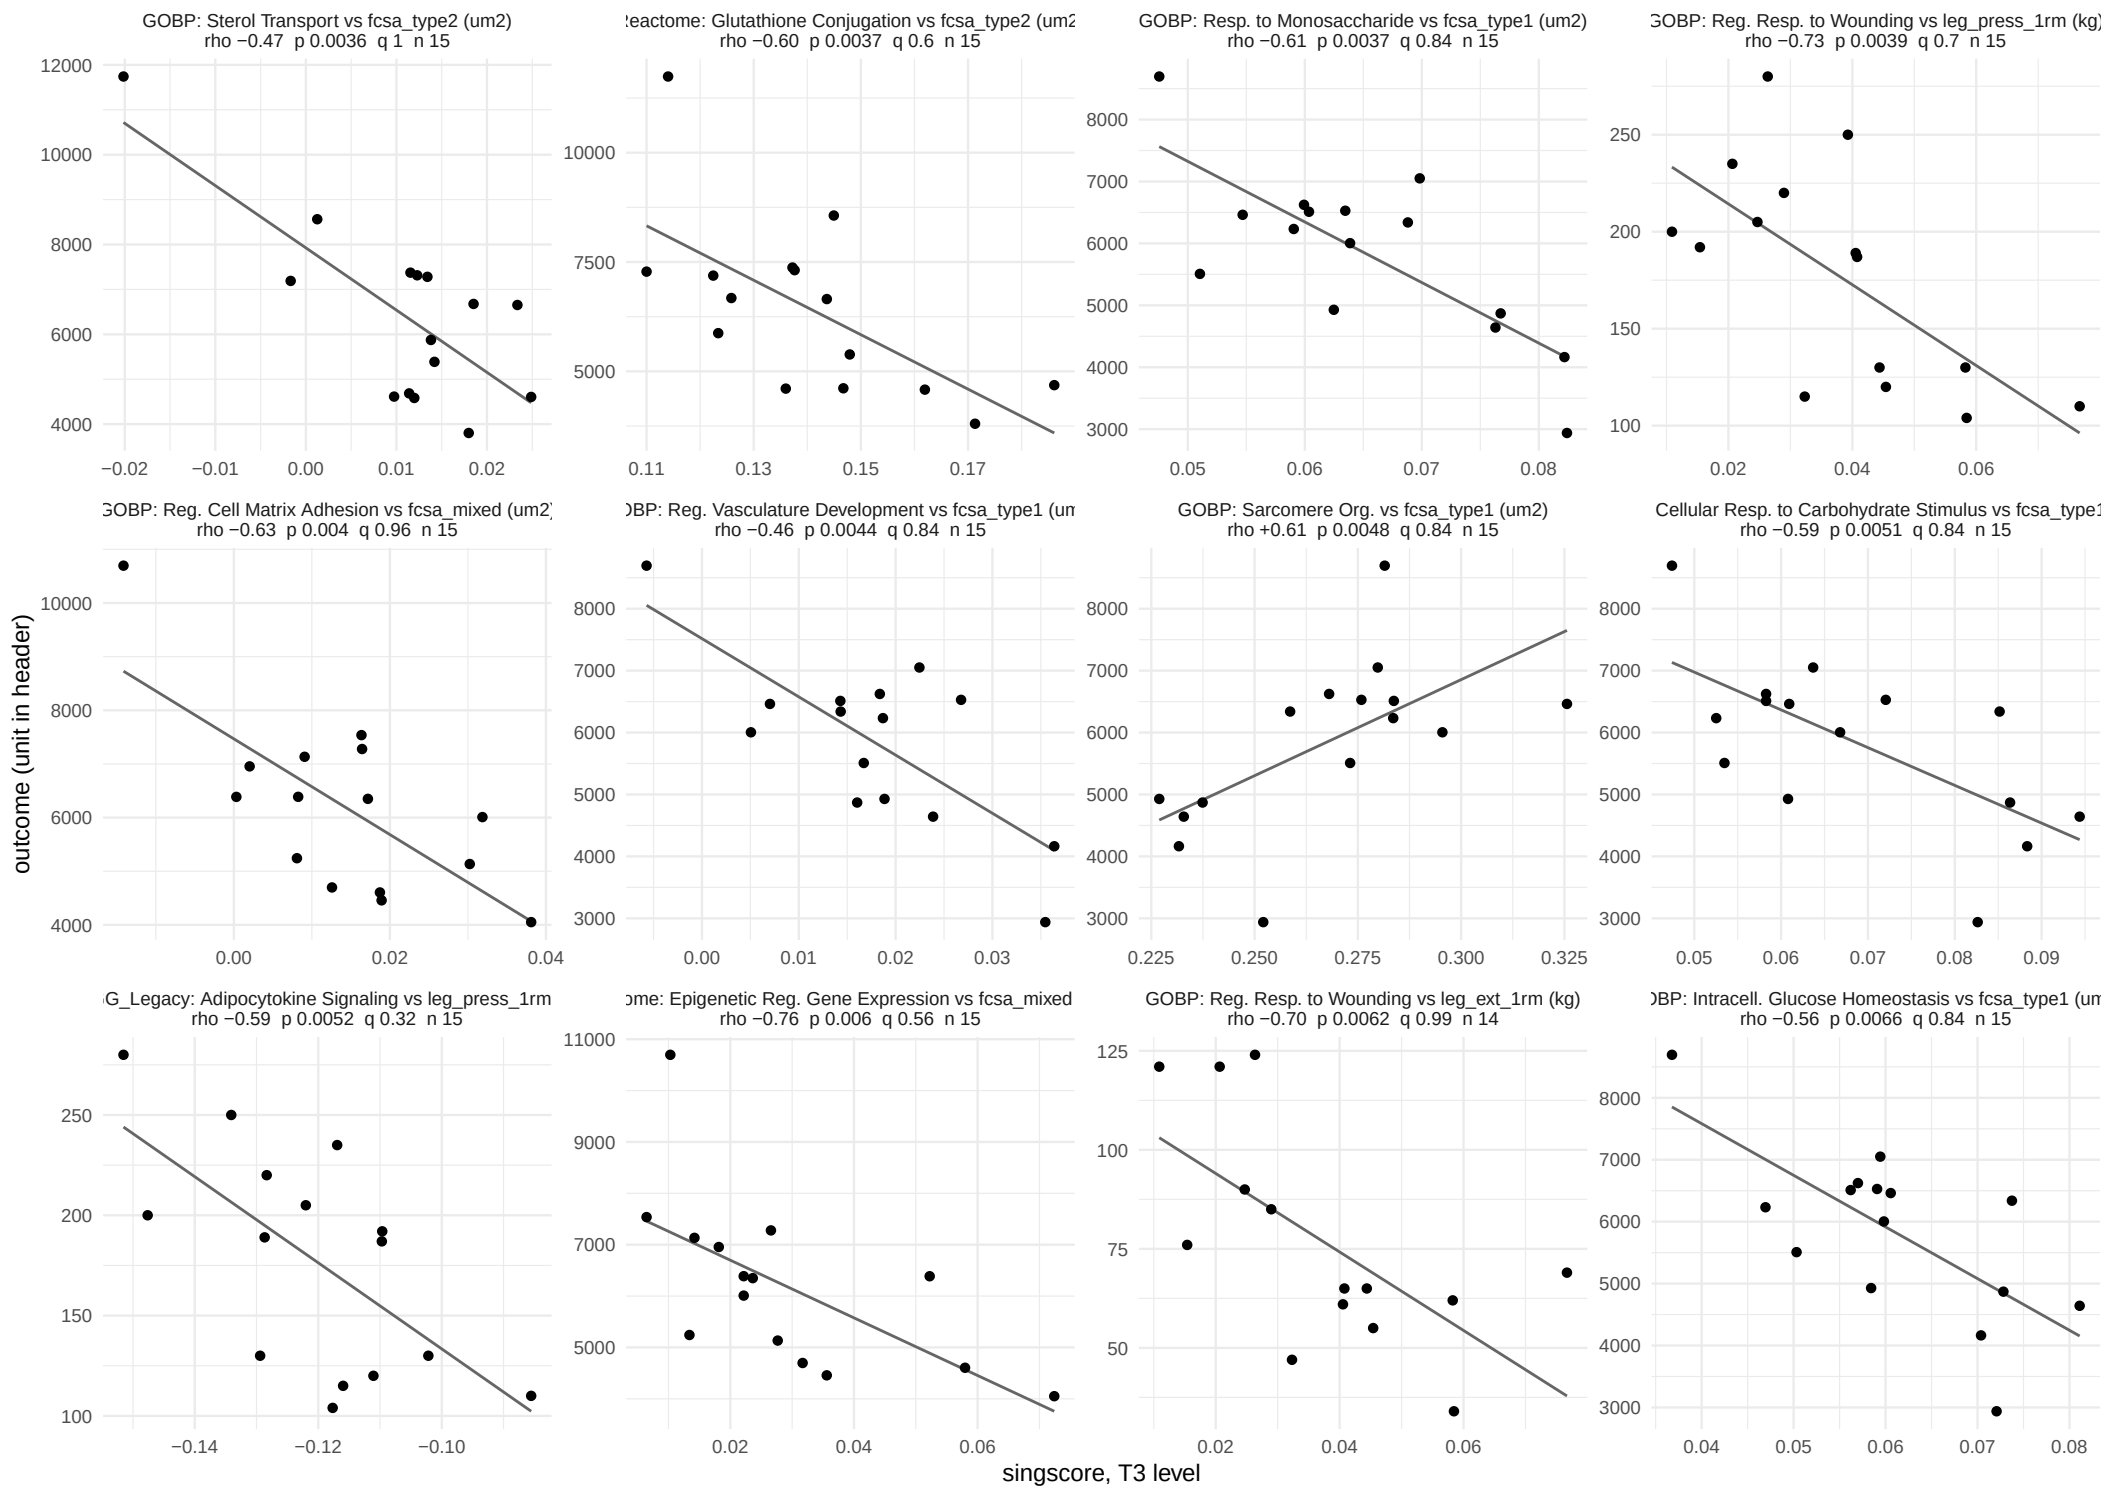

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, post_bout_level window


249 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 3 of 21.

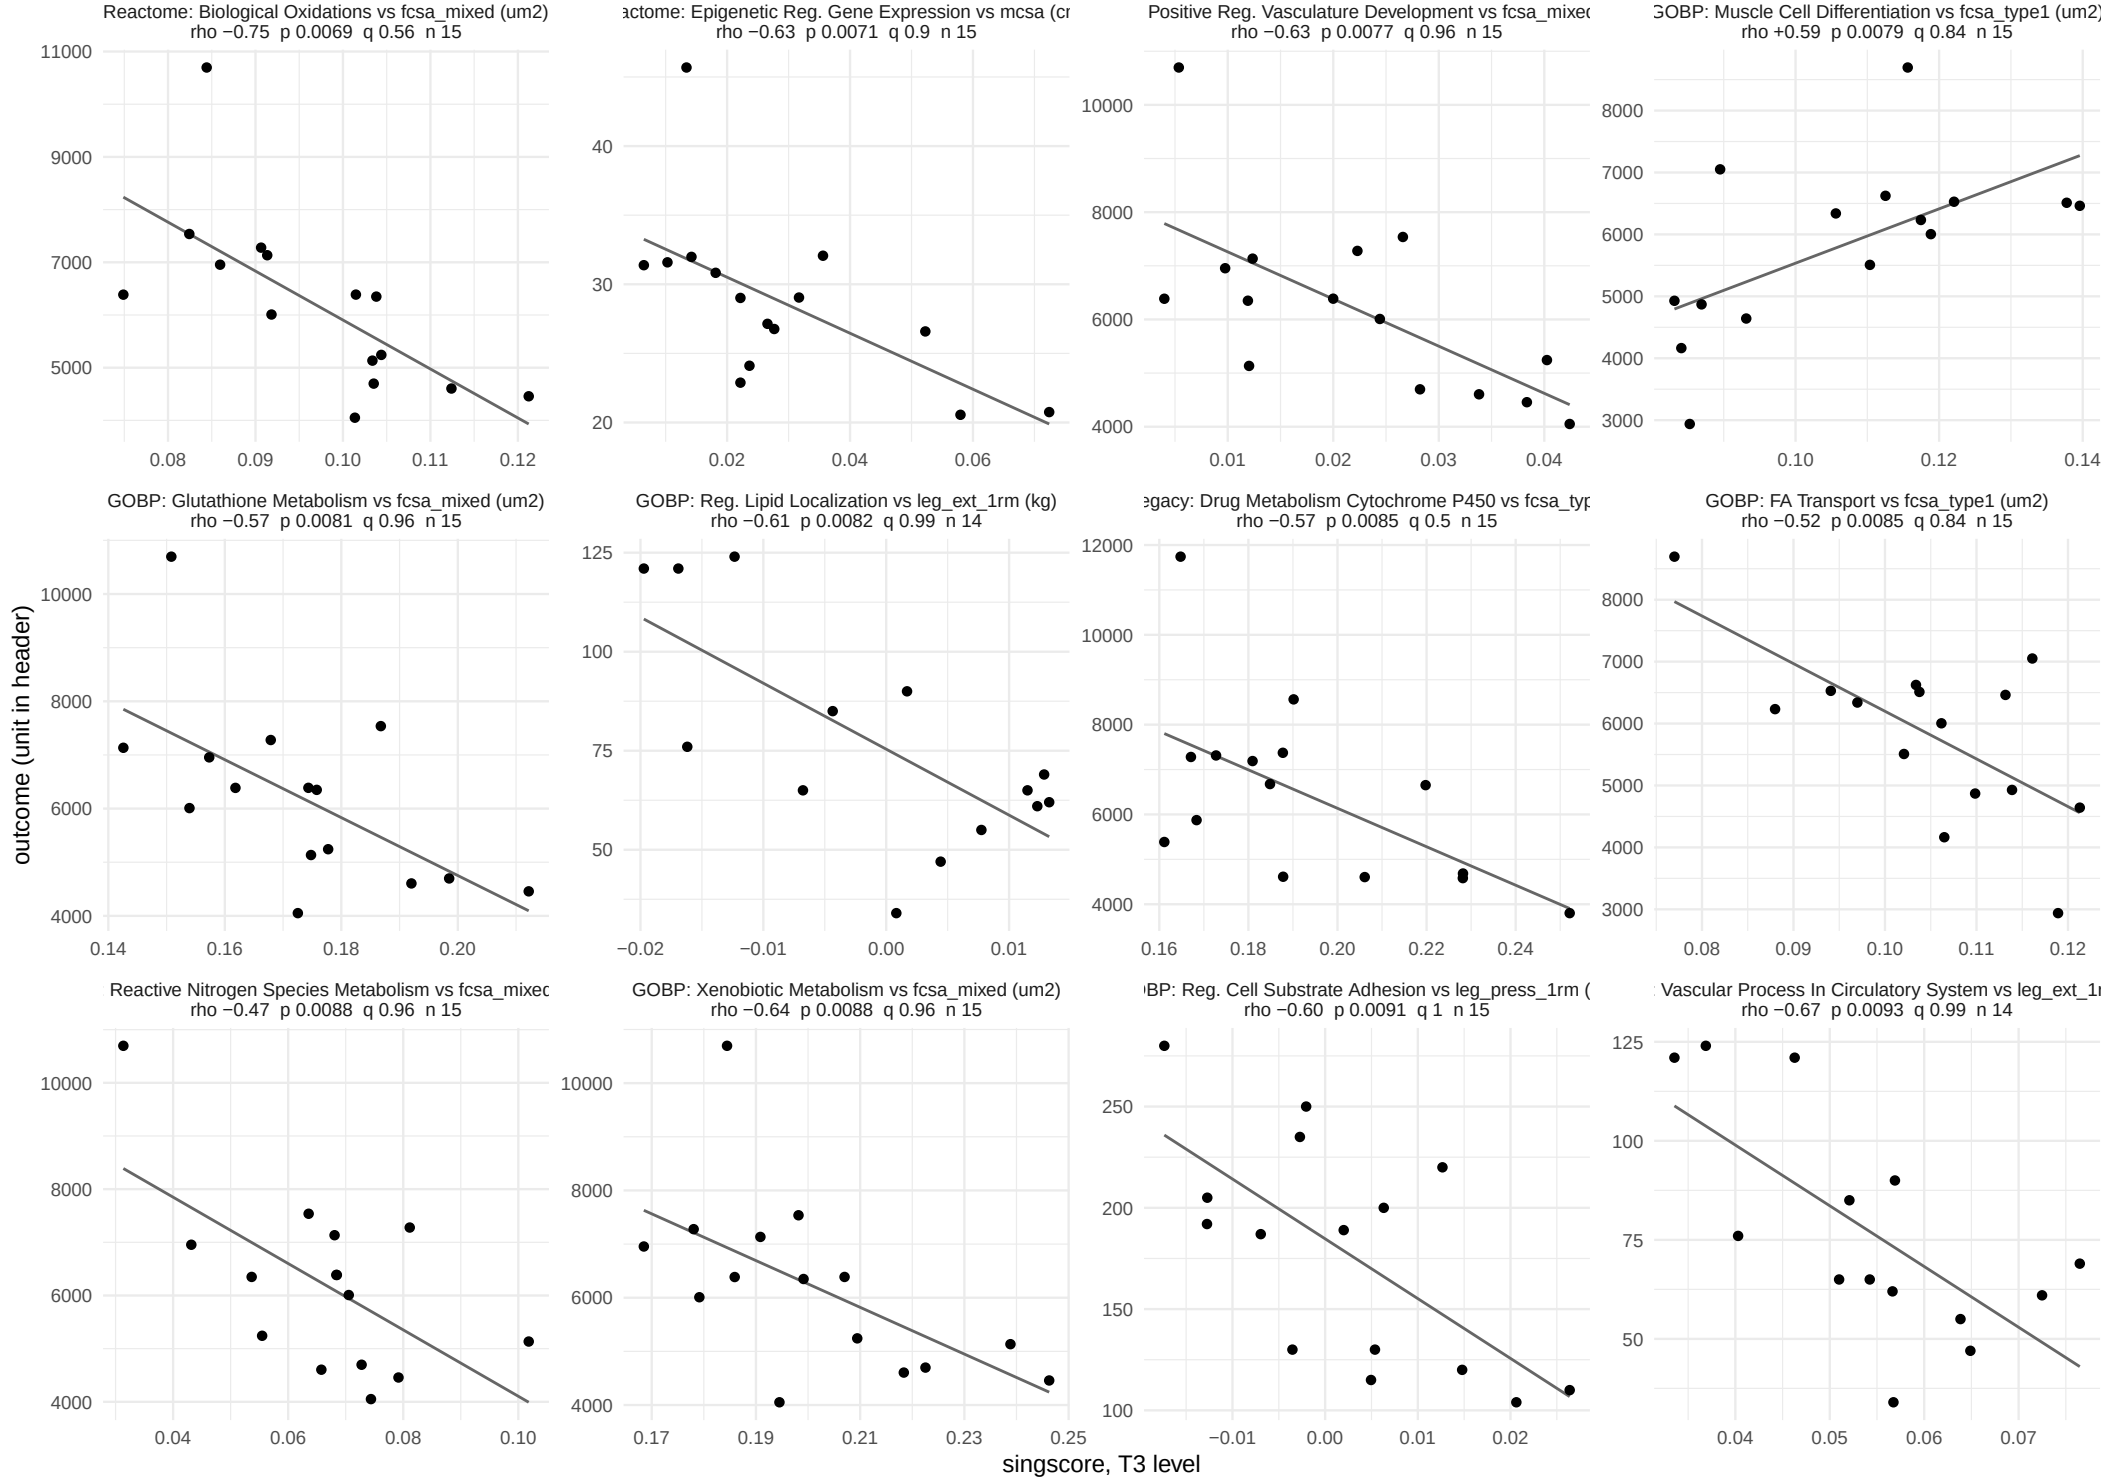

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, post_bout_level window


249 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 4 of 21.

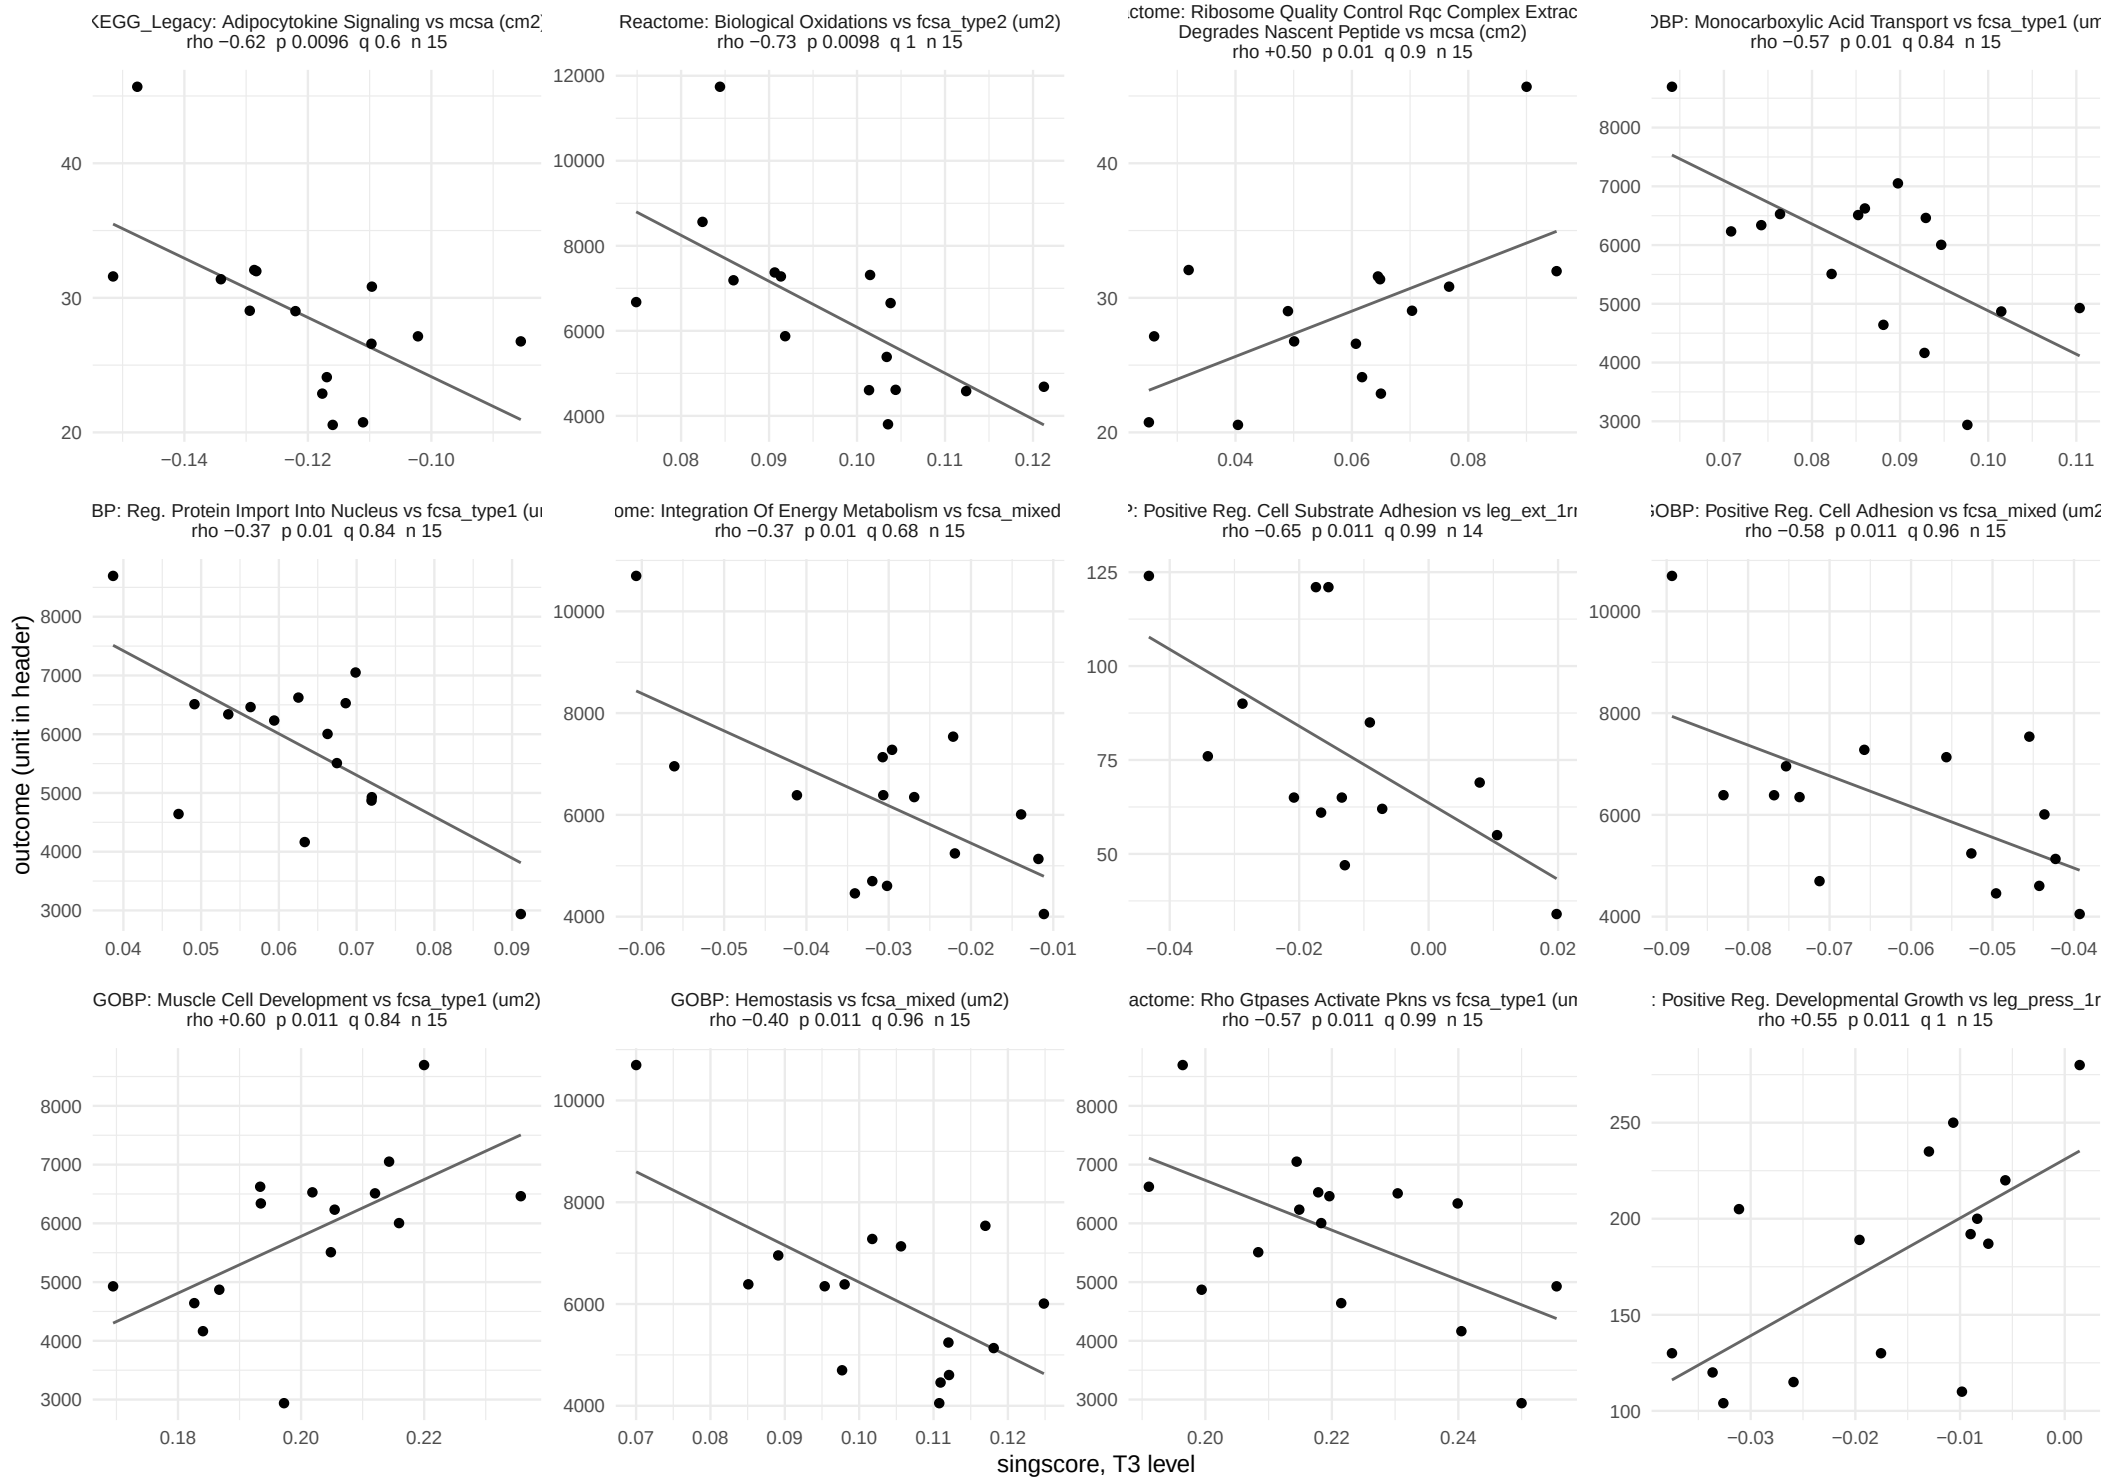

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, post_bout_level window


249 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 5 of 21.

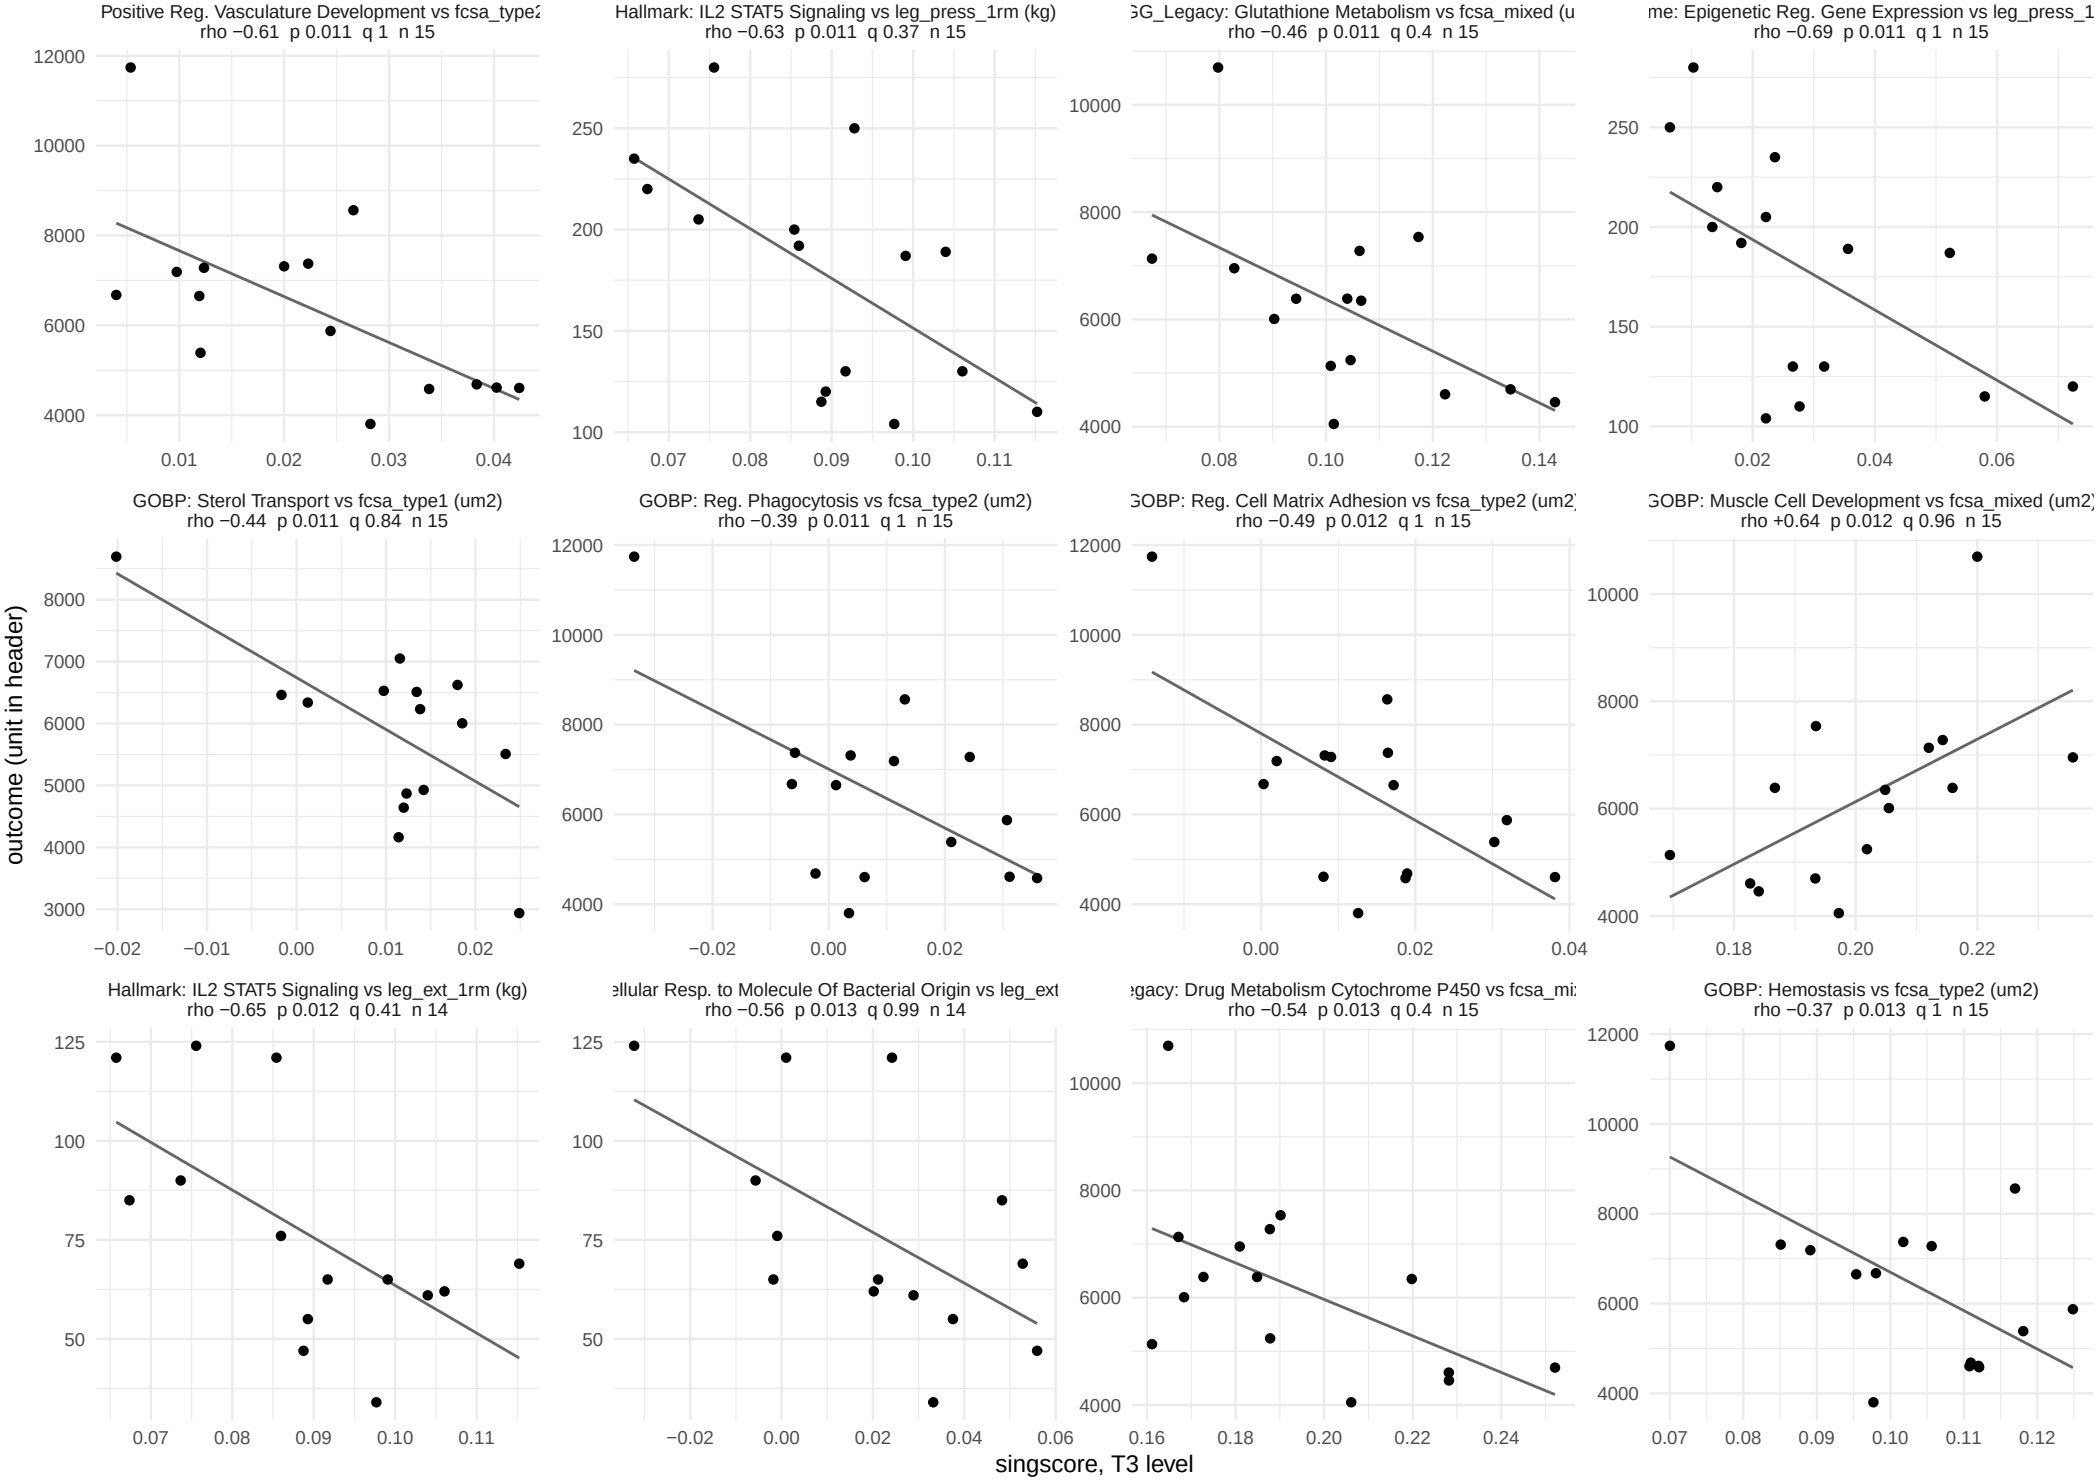

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, post_bout_level window


249 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 6 of 21.

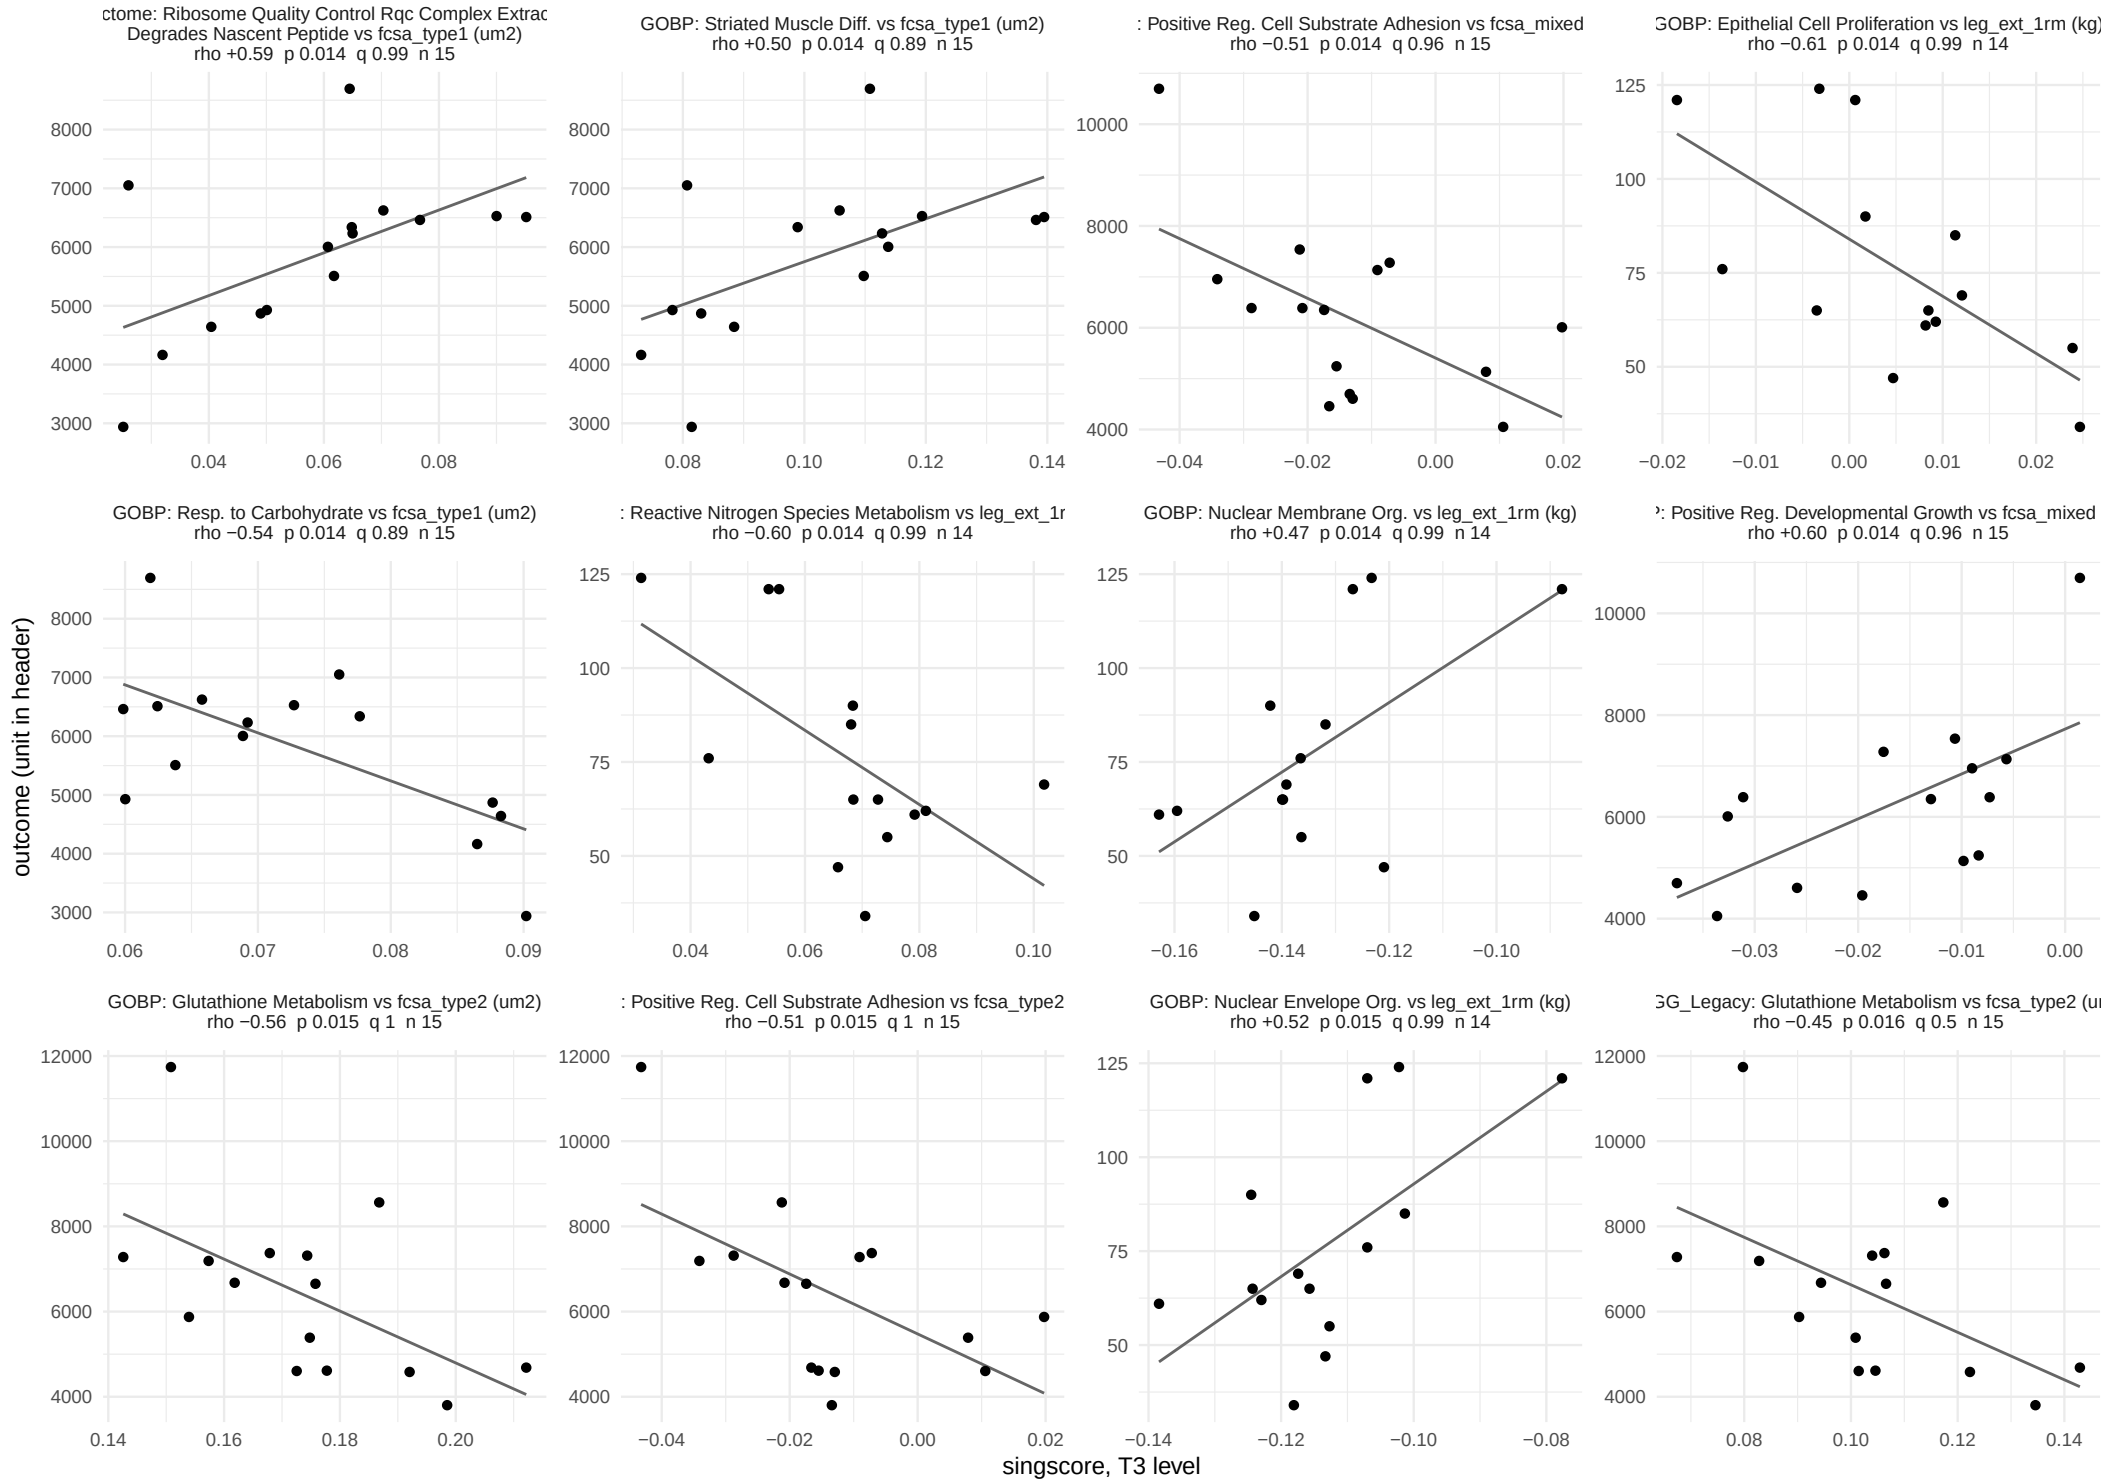

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, post_bout_level window


249 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 7 of 21.

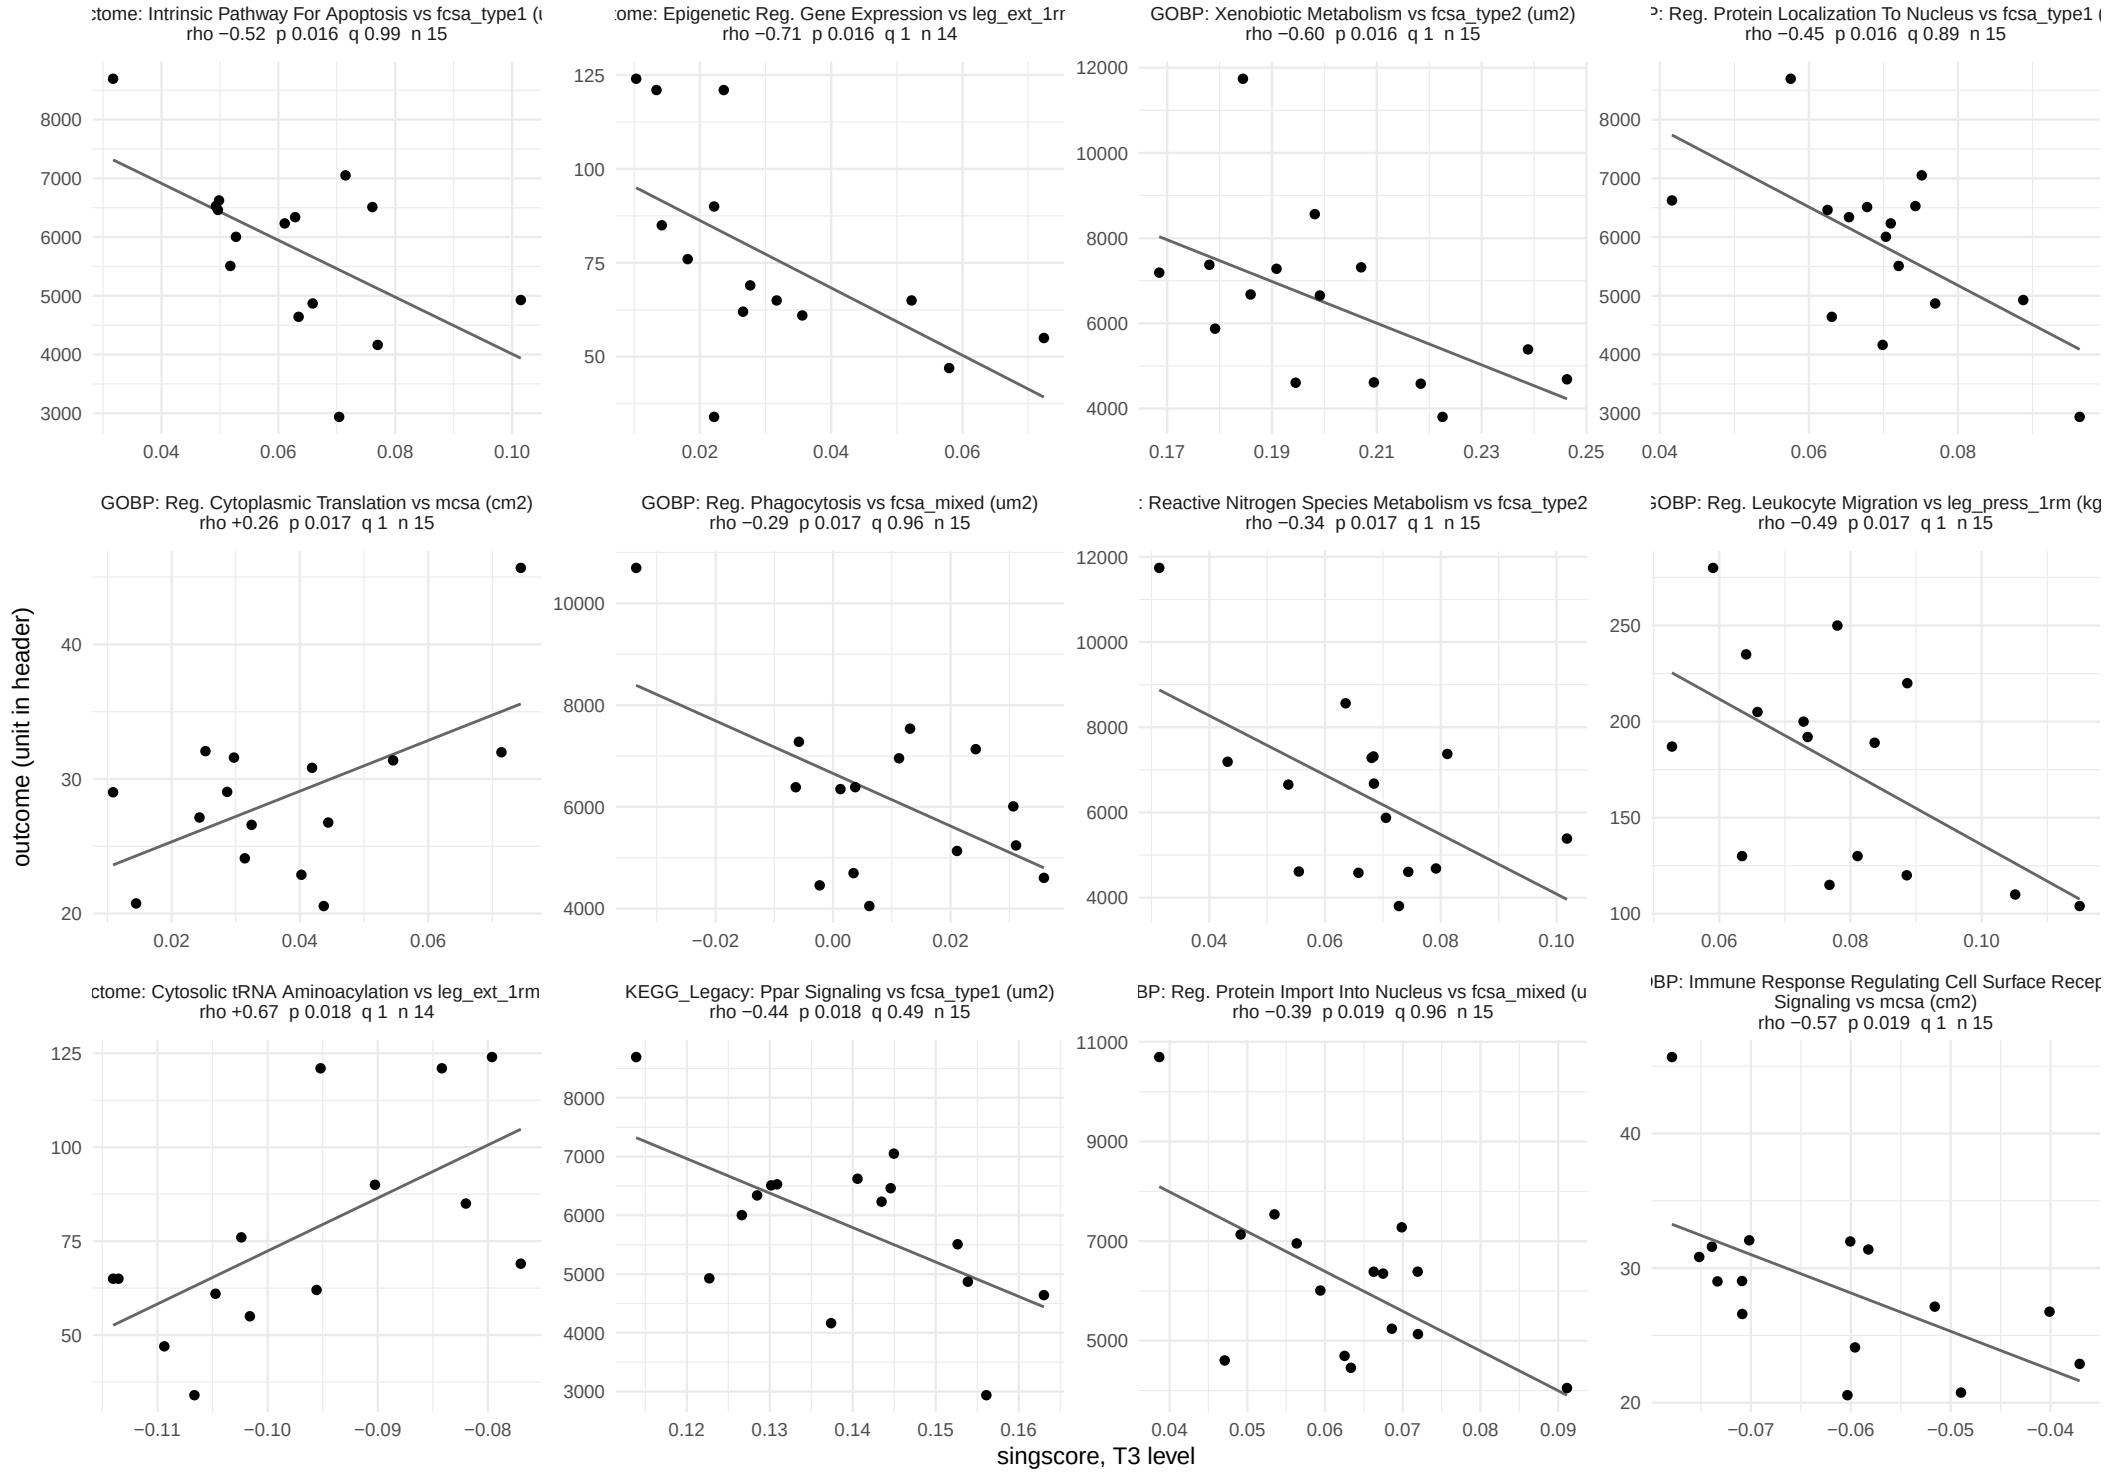

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, post_bout_level window


249 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 8 of 21.

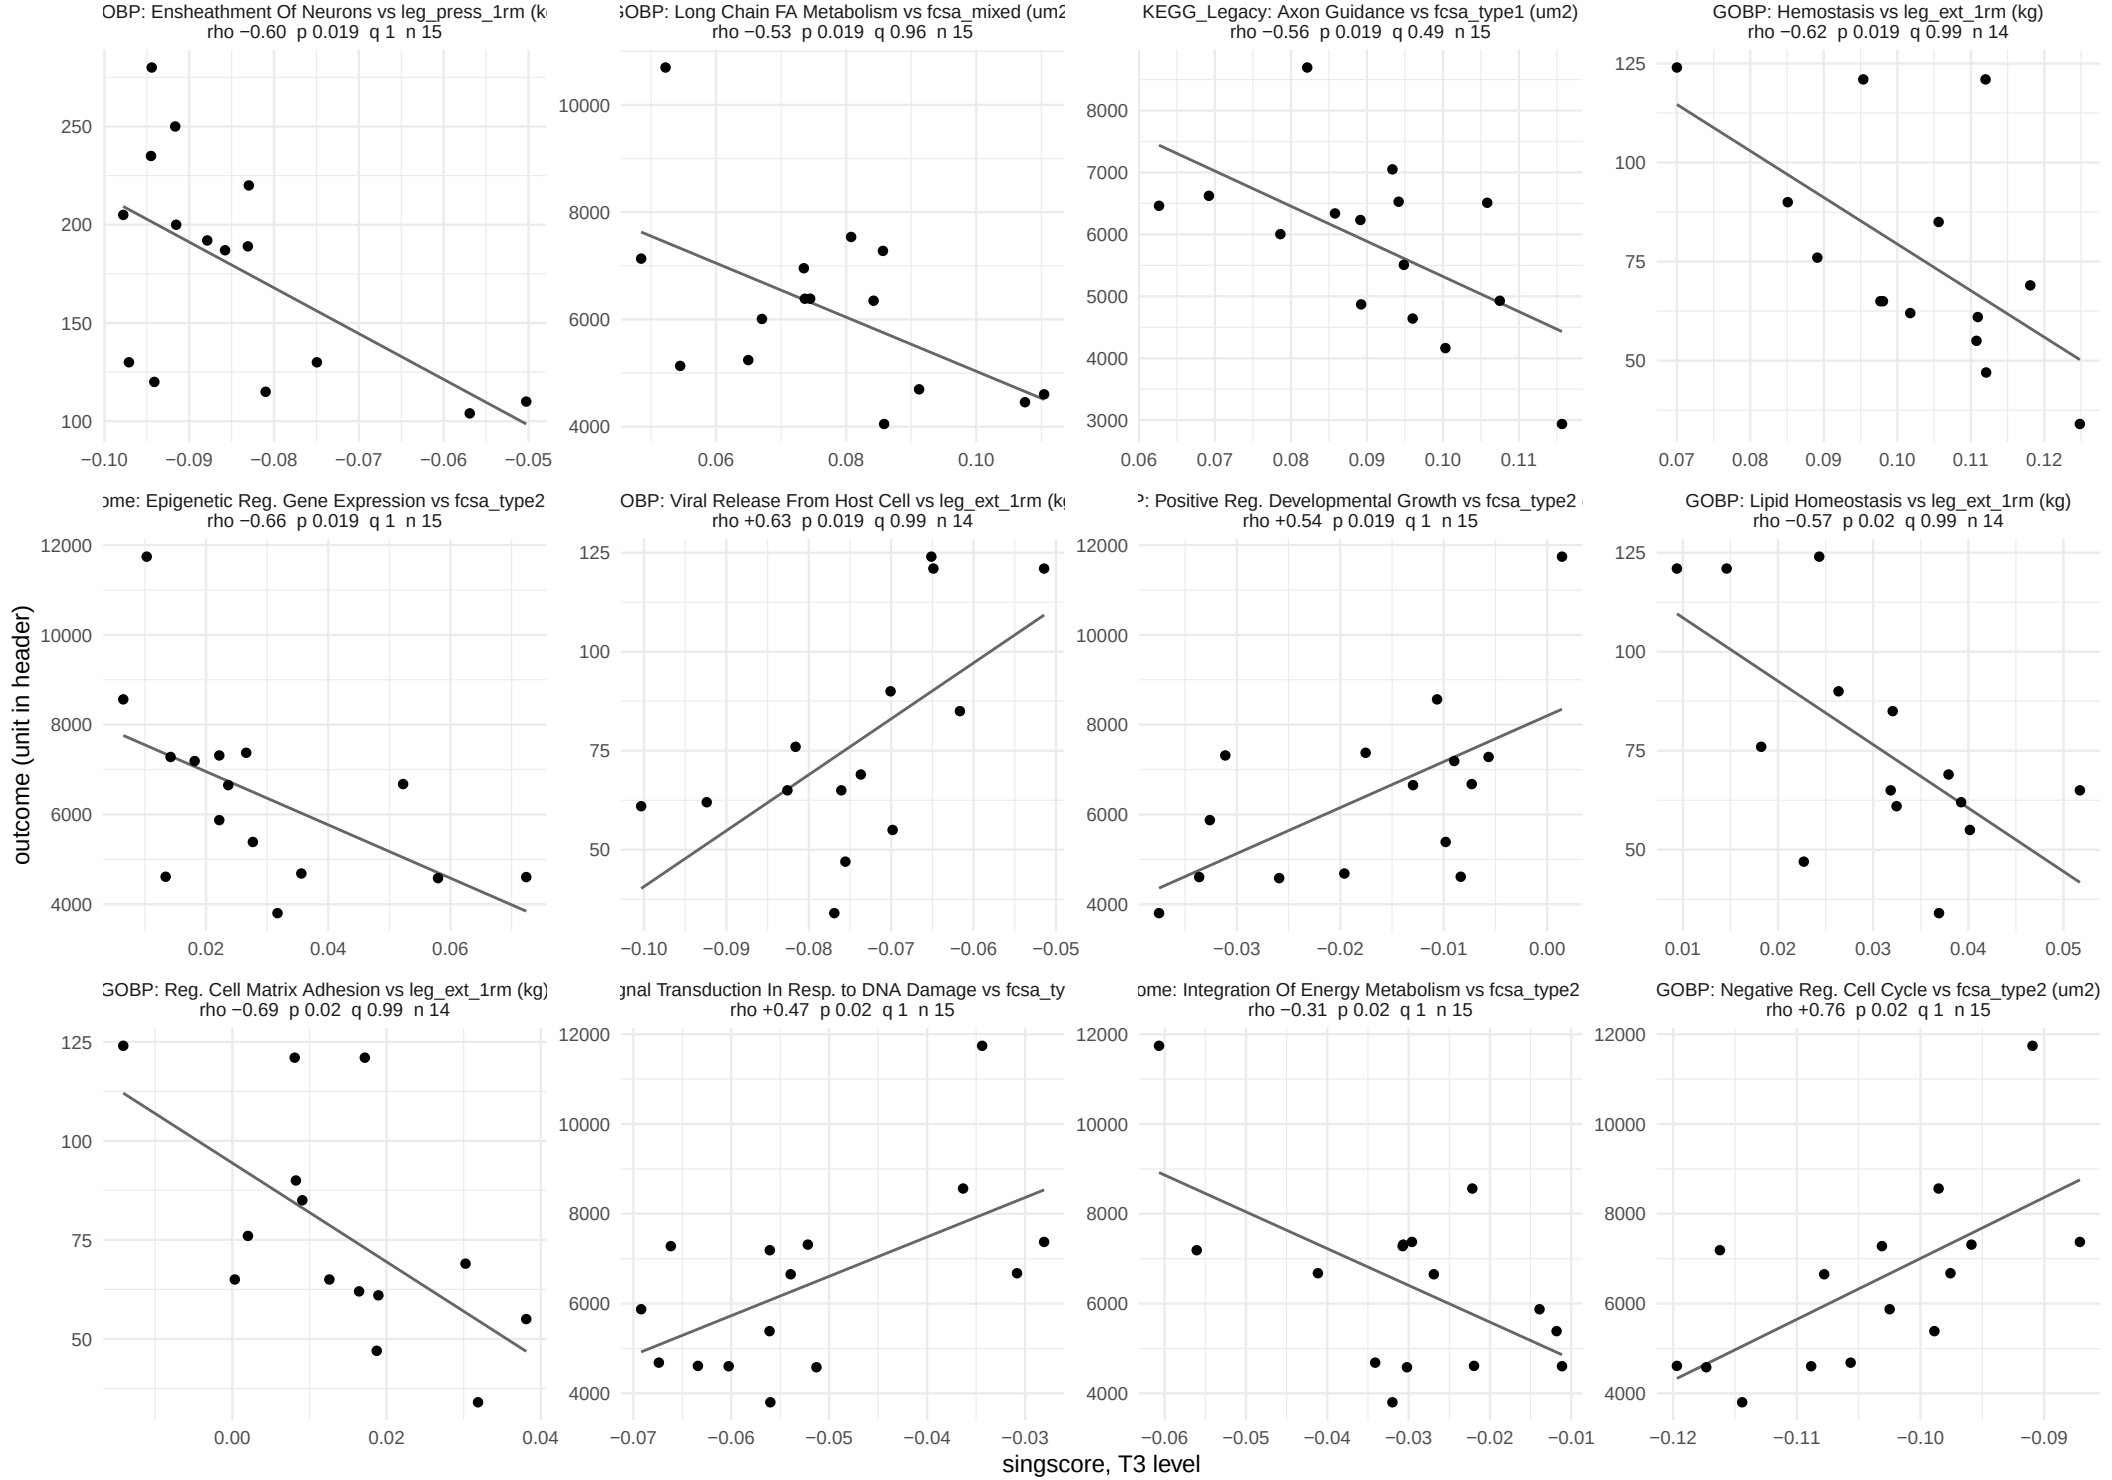

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, post_bout_level window


249 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 9 of 21.

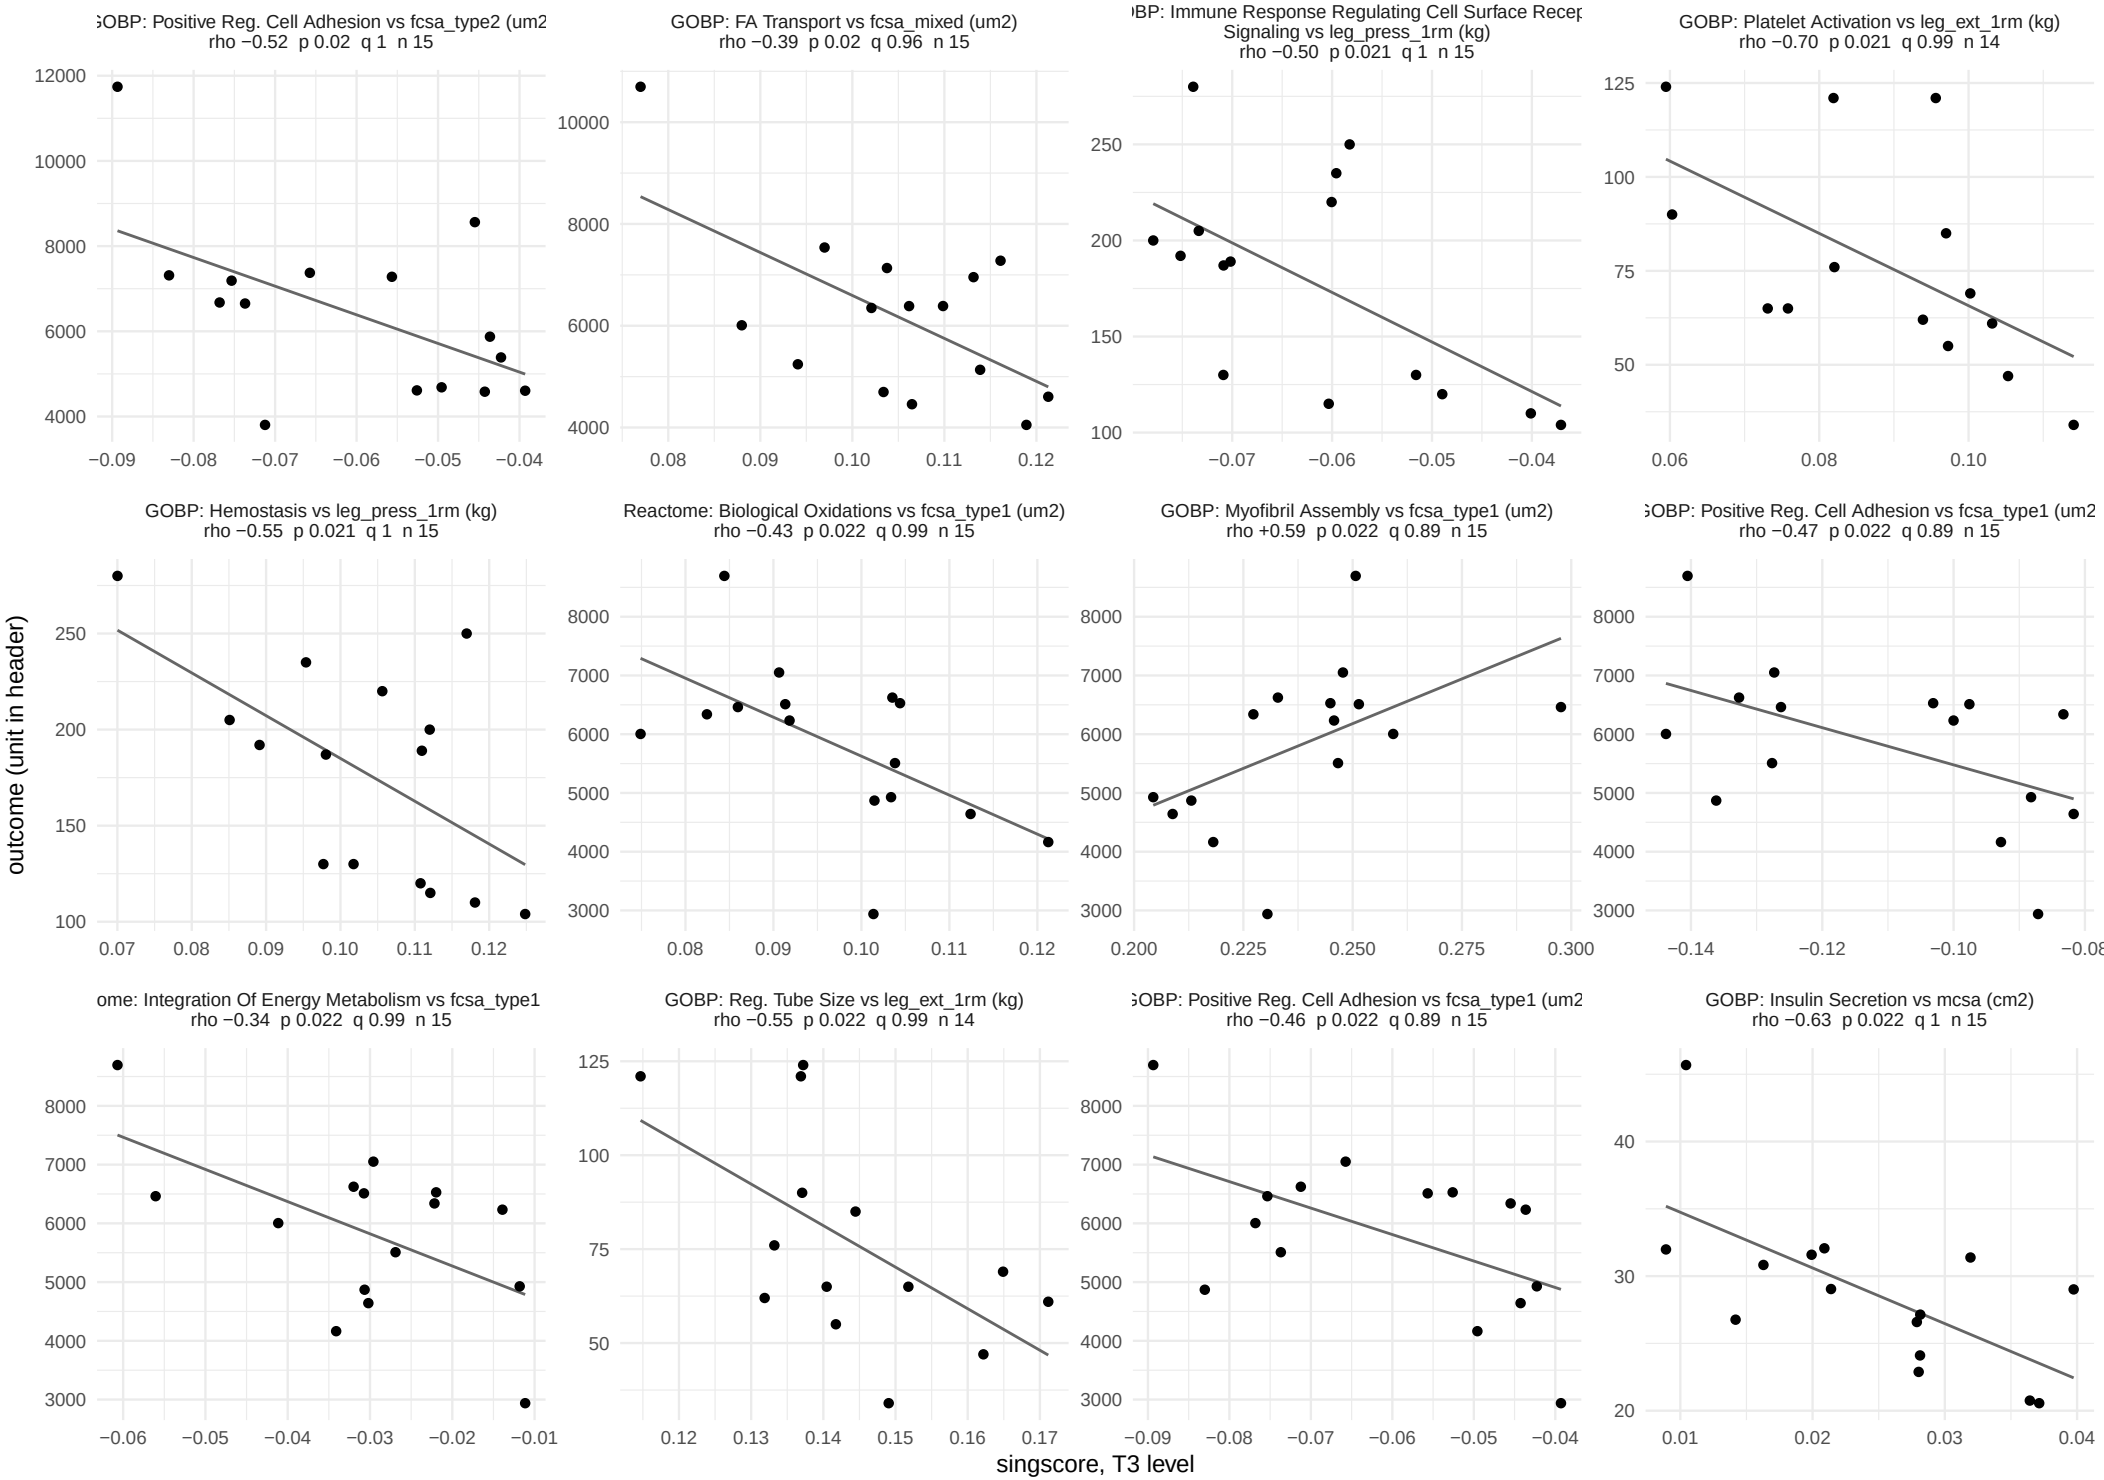

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, post_bout_level window


249 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 10 of 21.

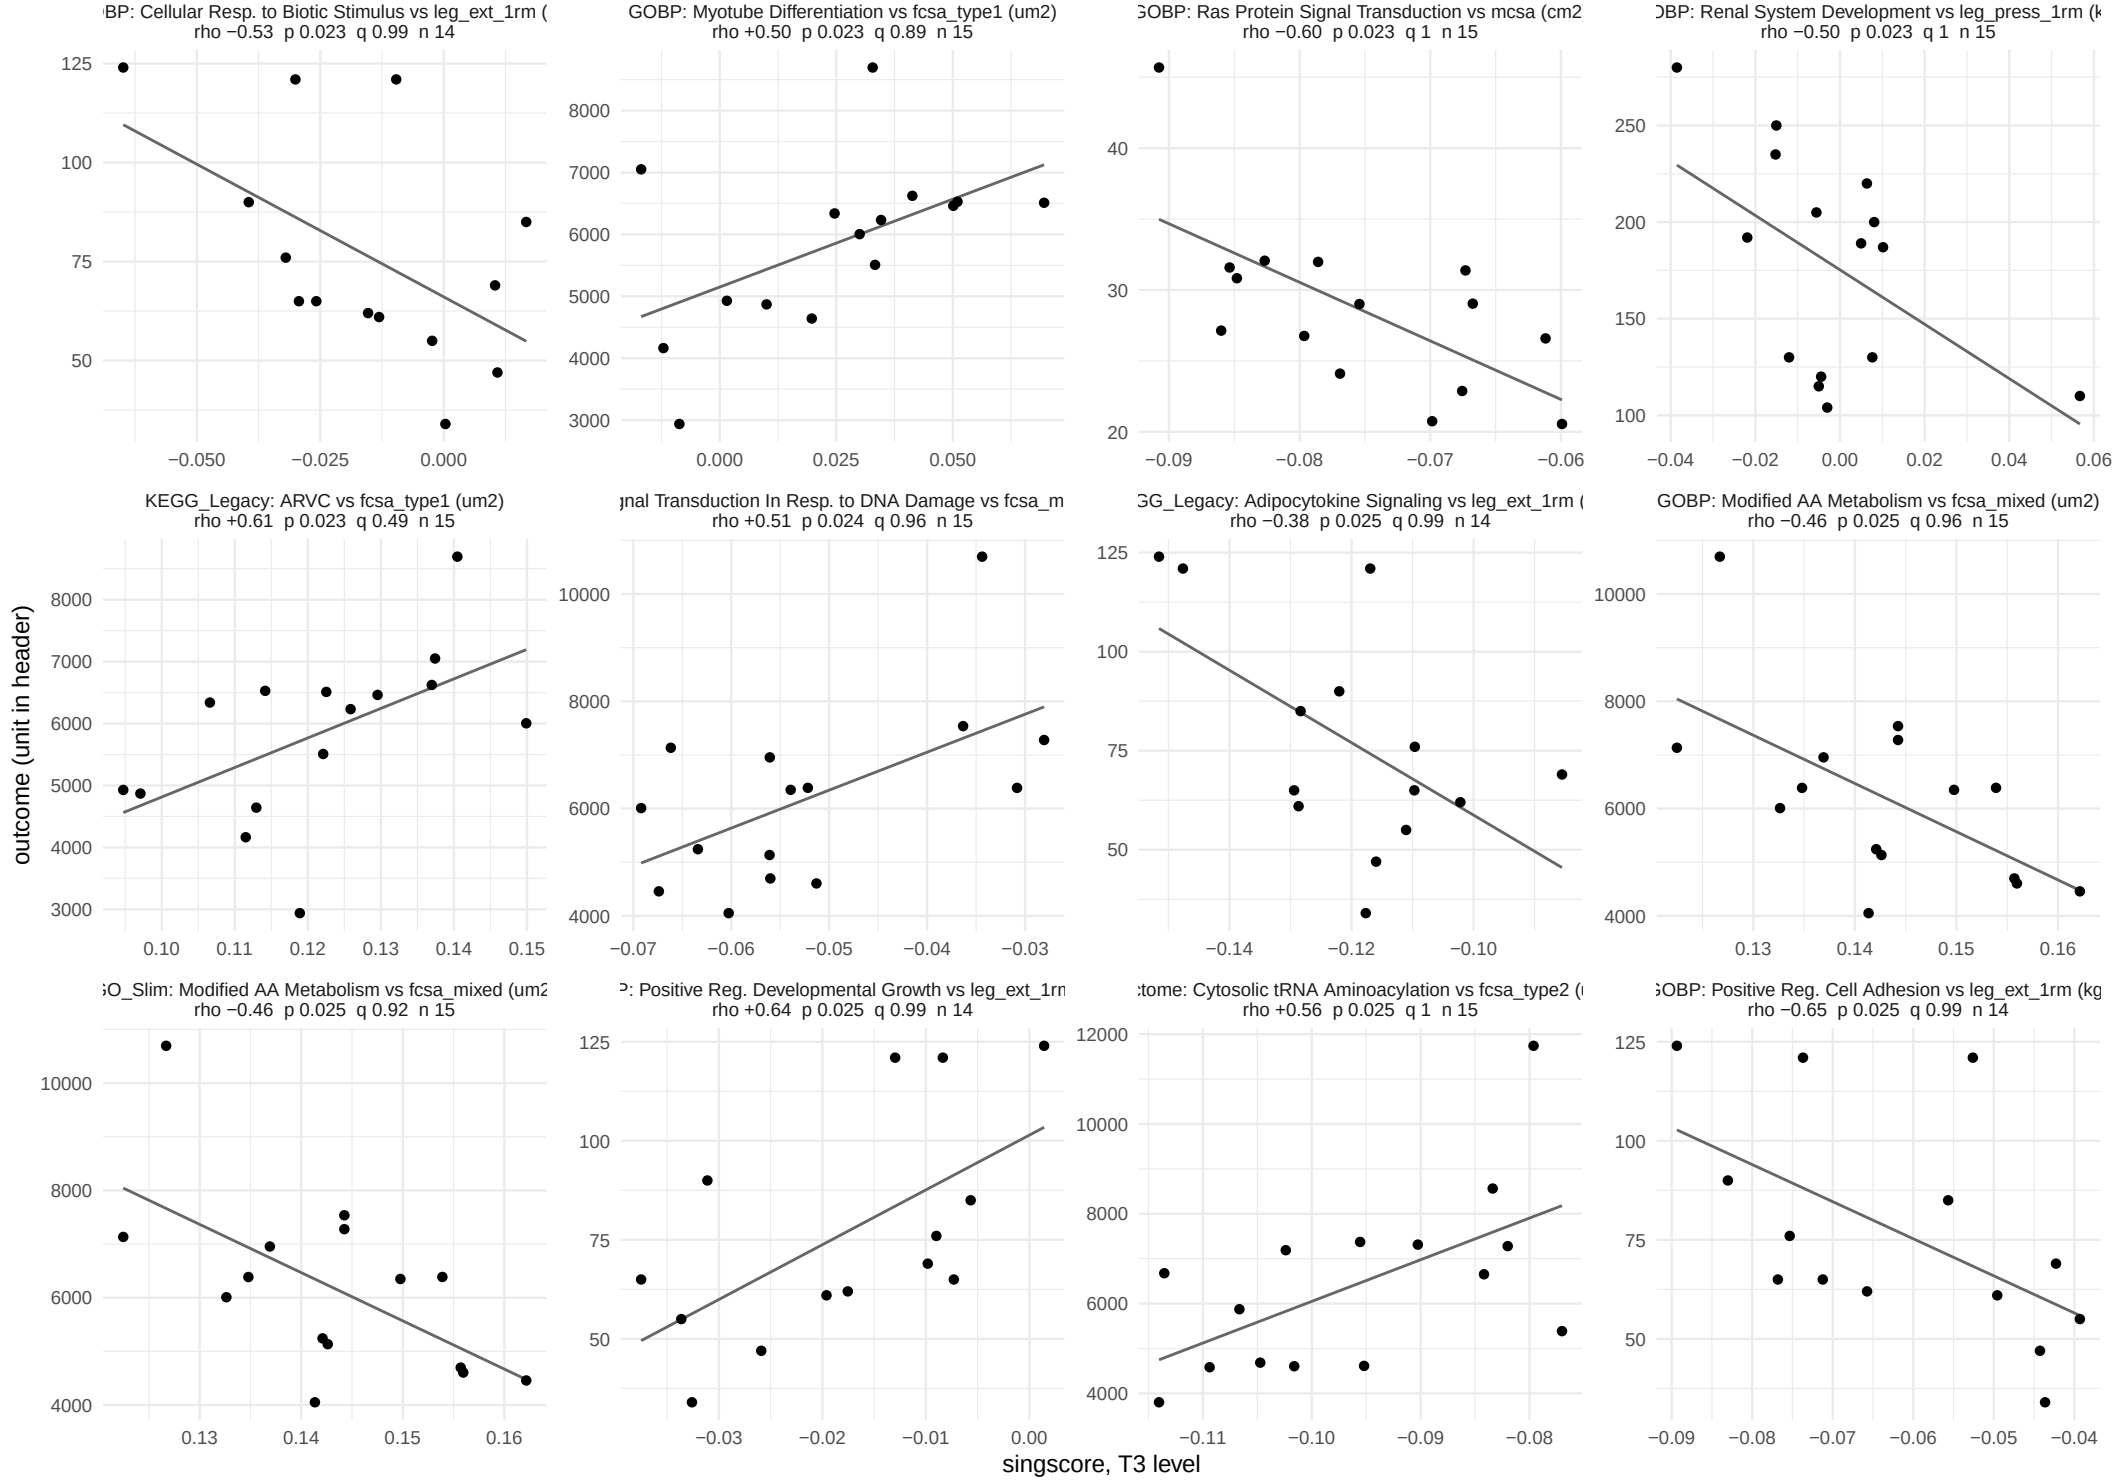

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, post_bout_level window


249 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 11 of 21.

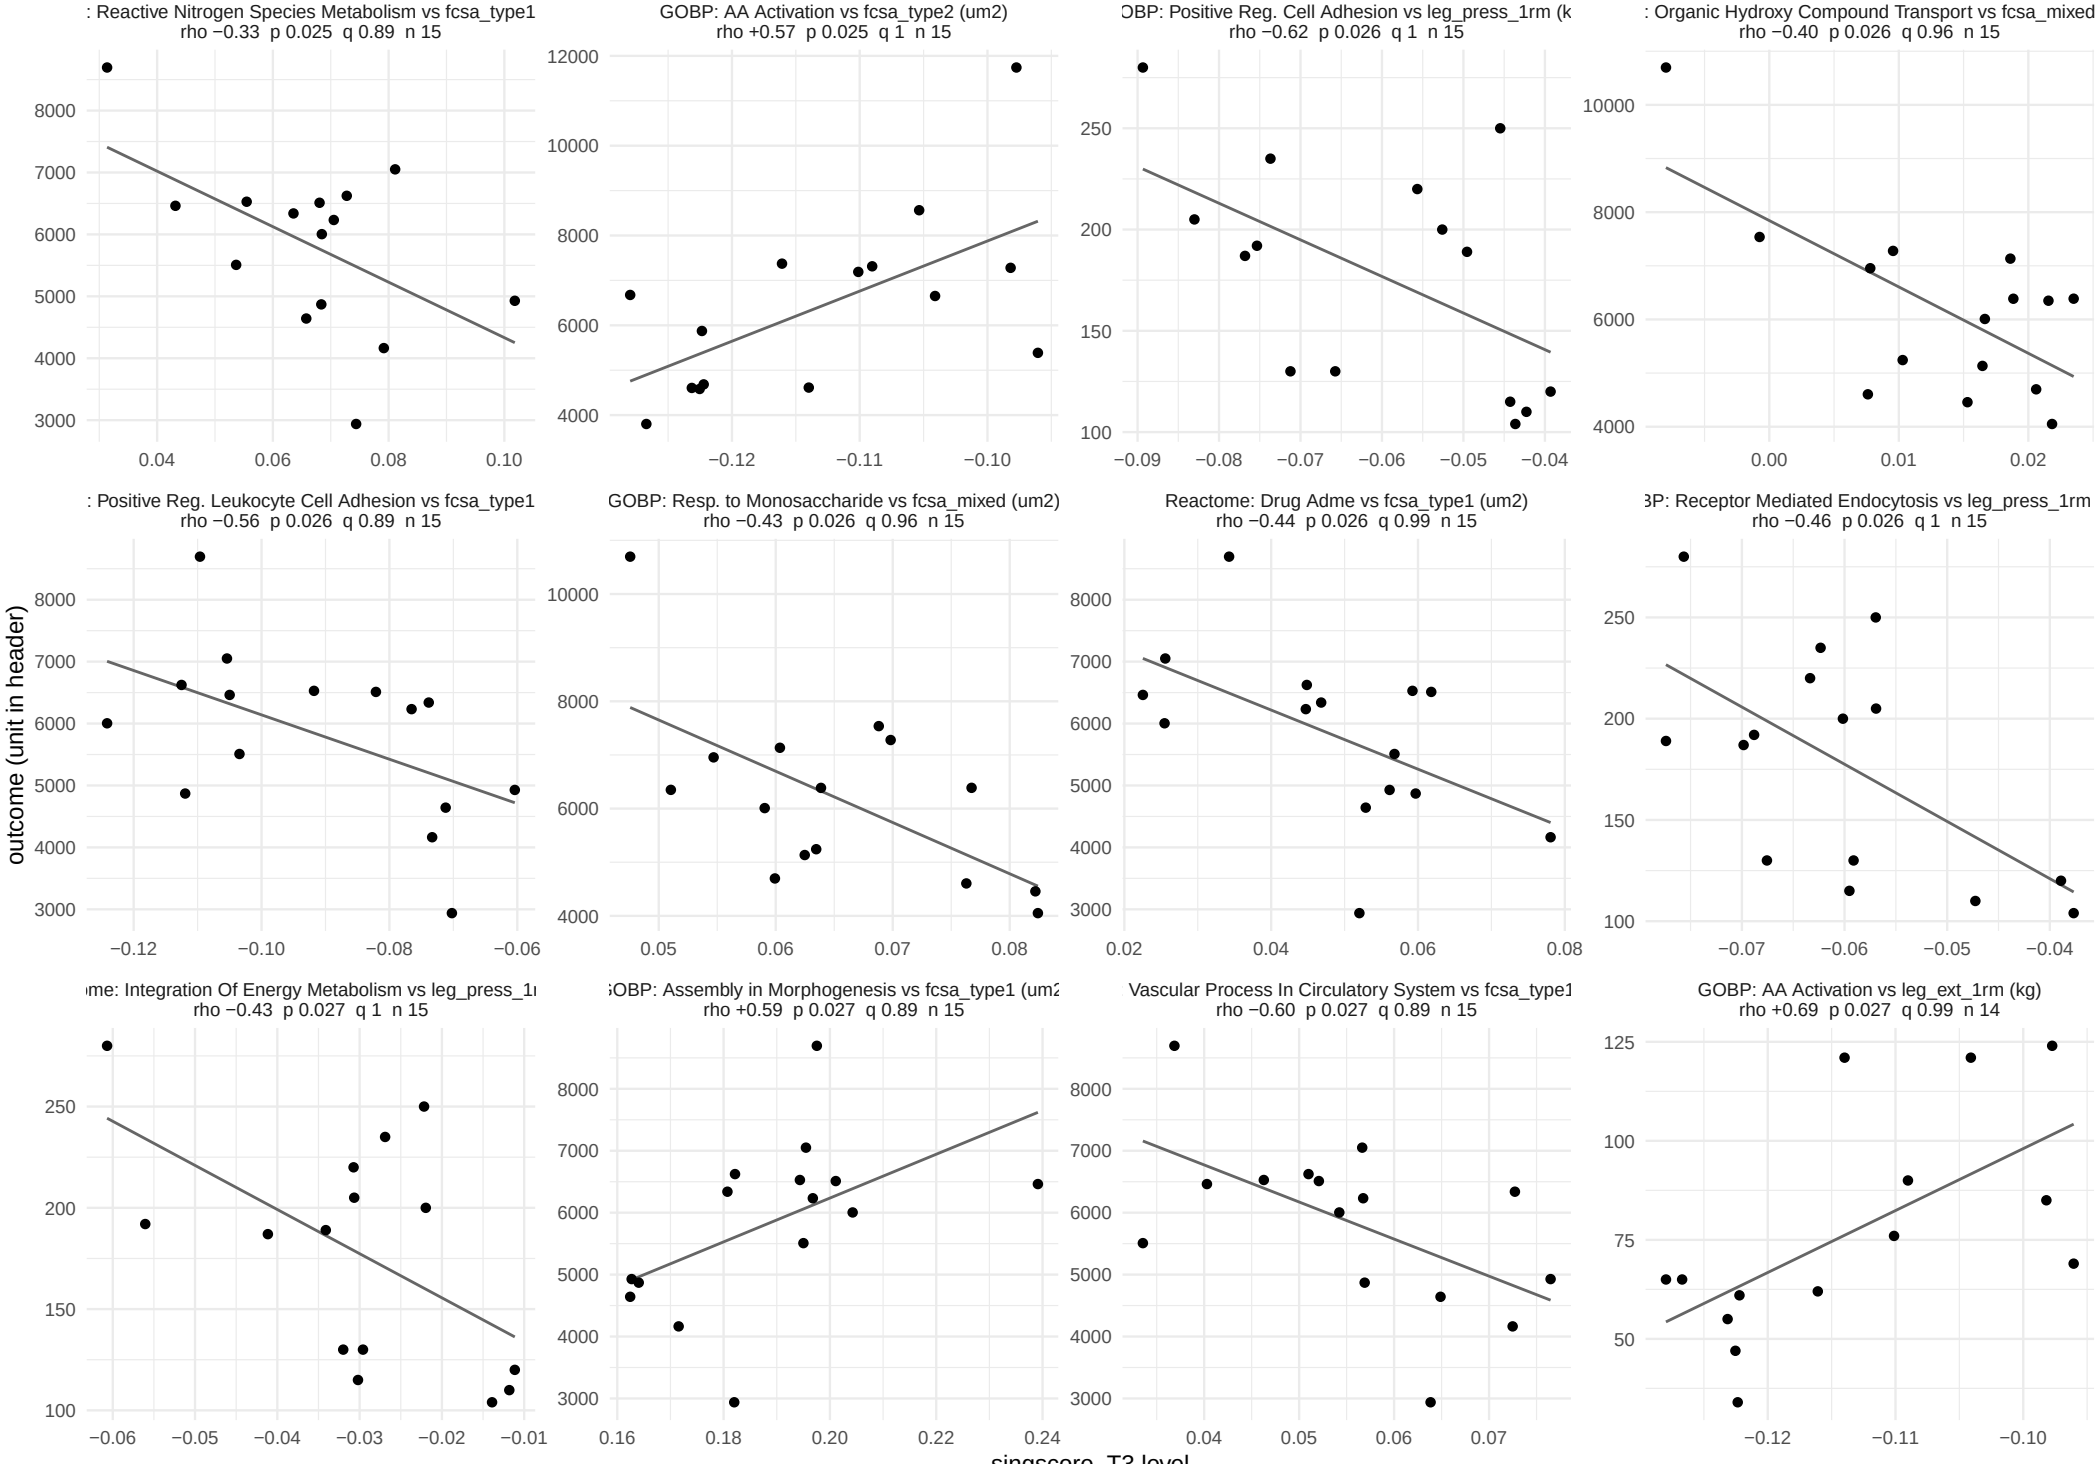

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, post_bout_level window


249 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 12 of 21.

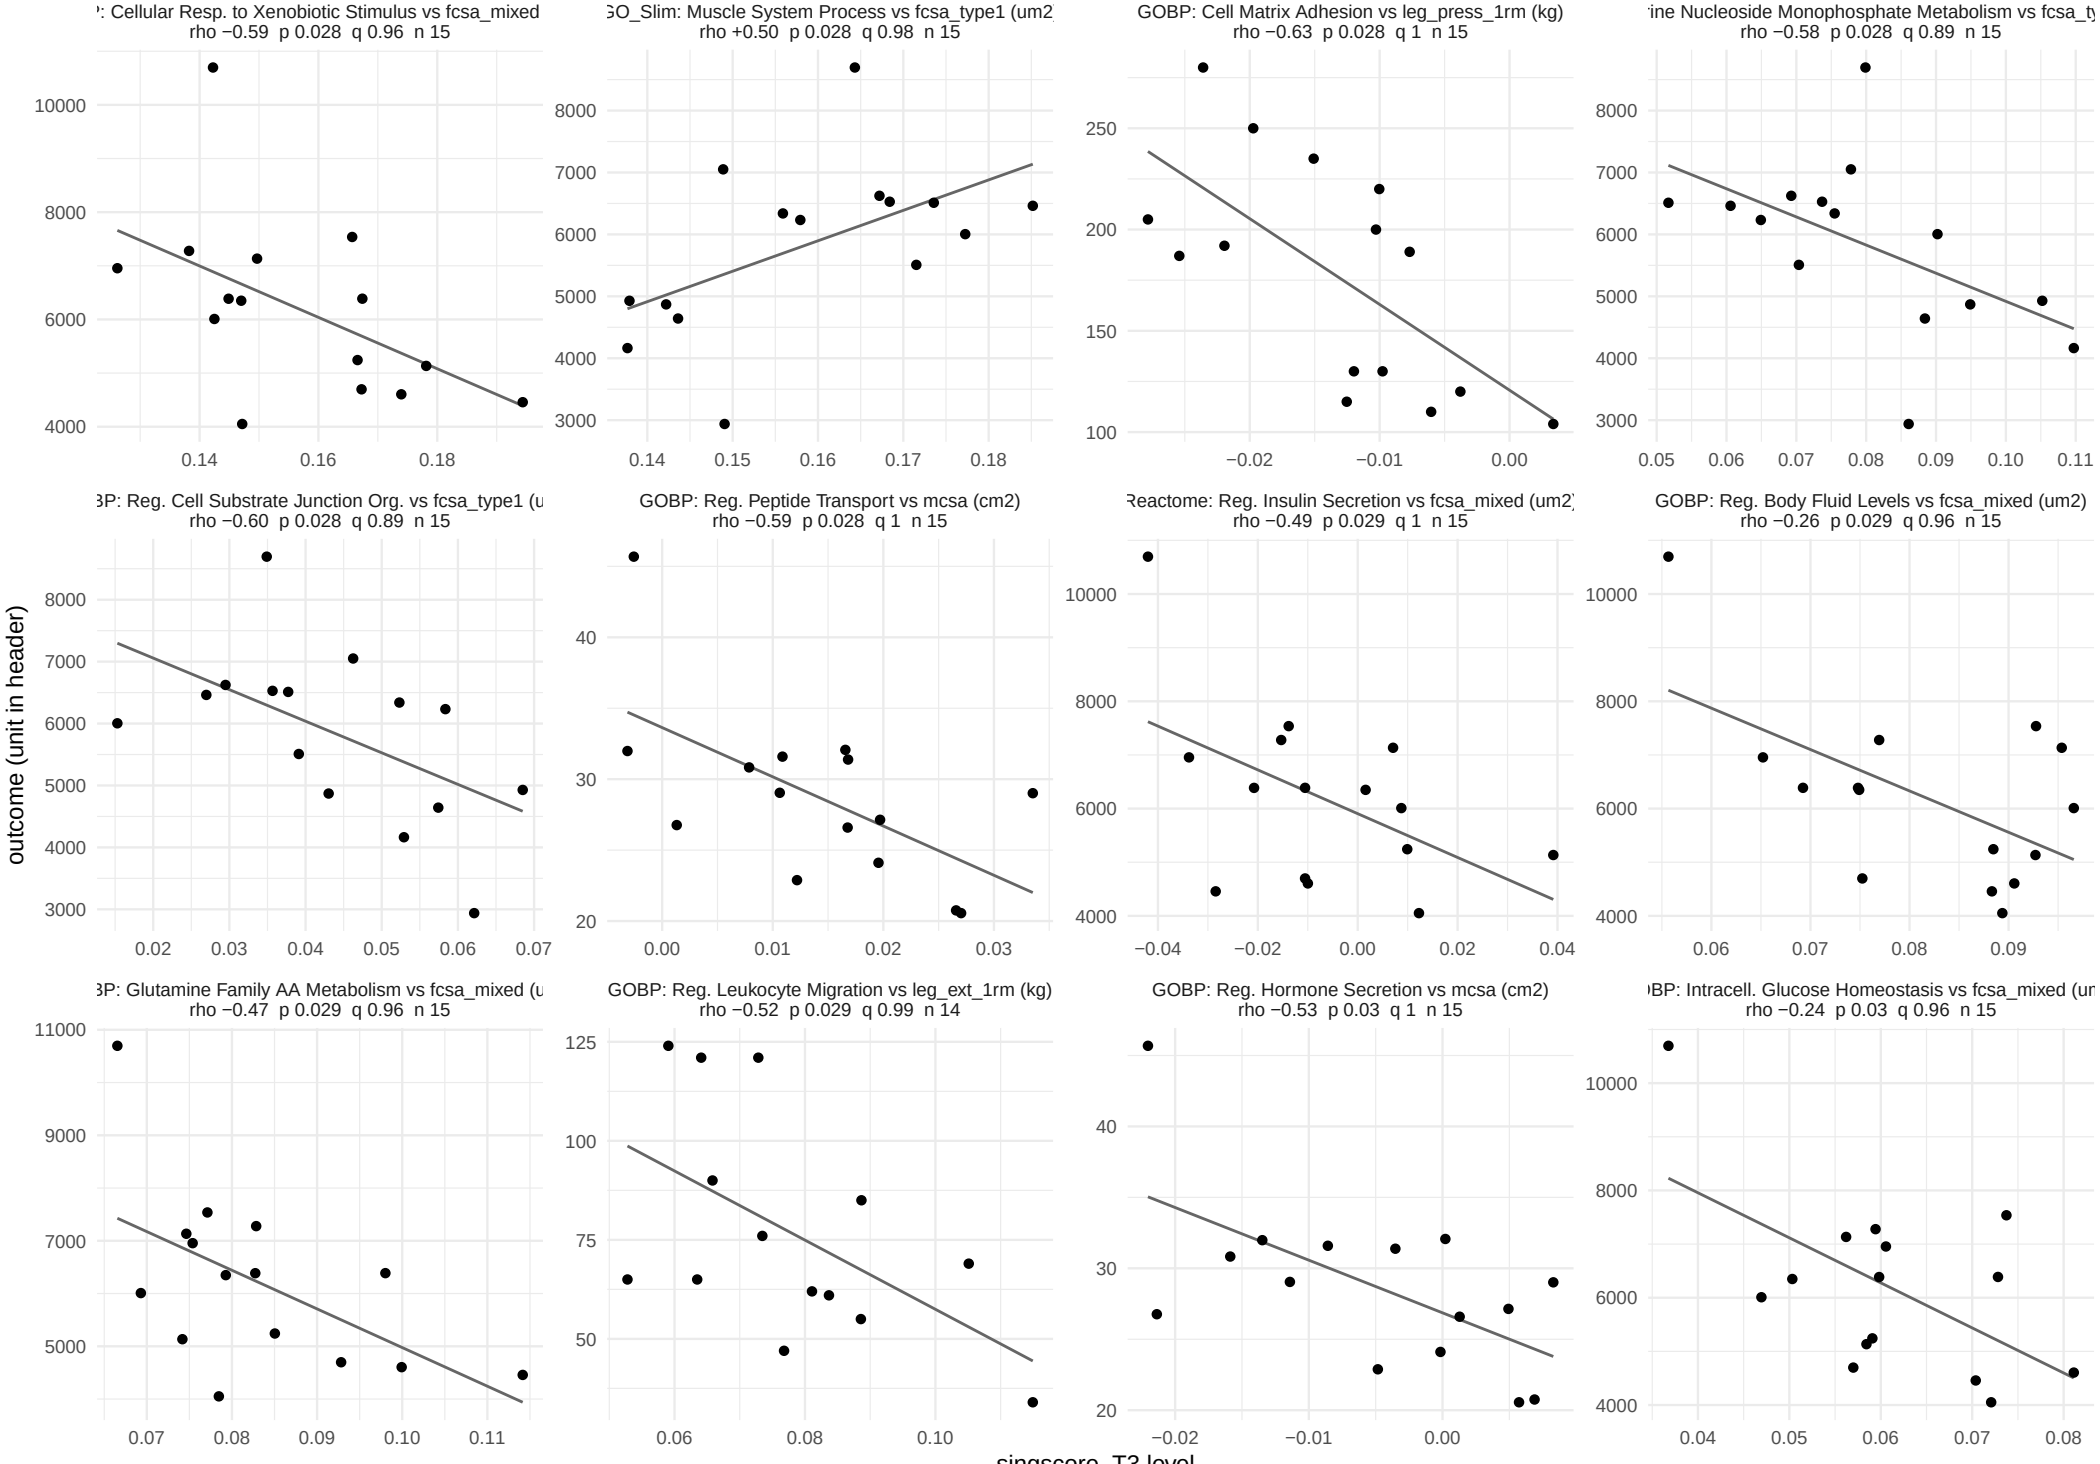

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, post_bout_level window


249 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 13 of 21.

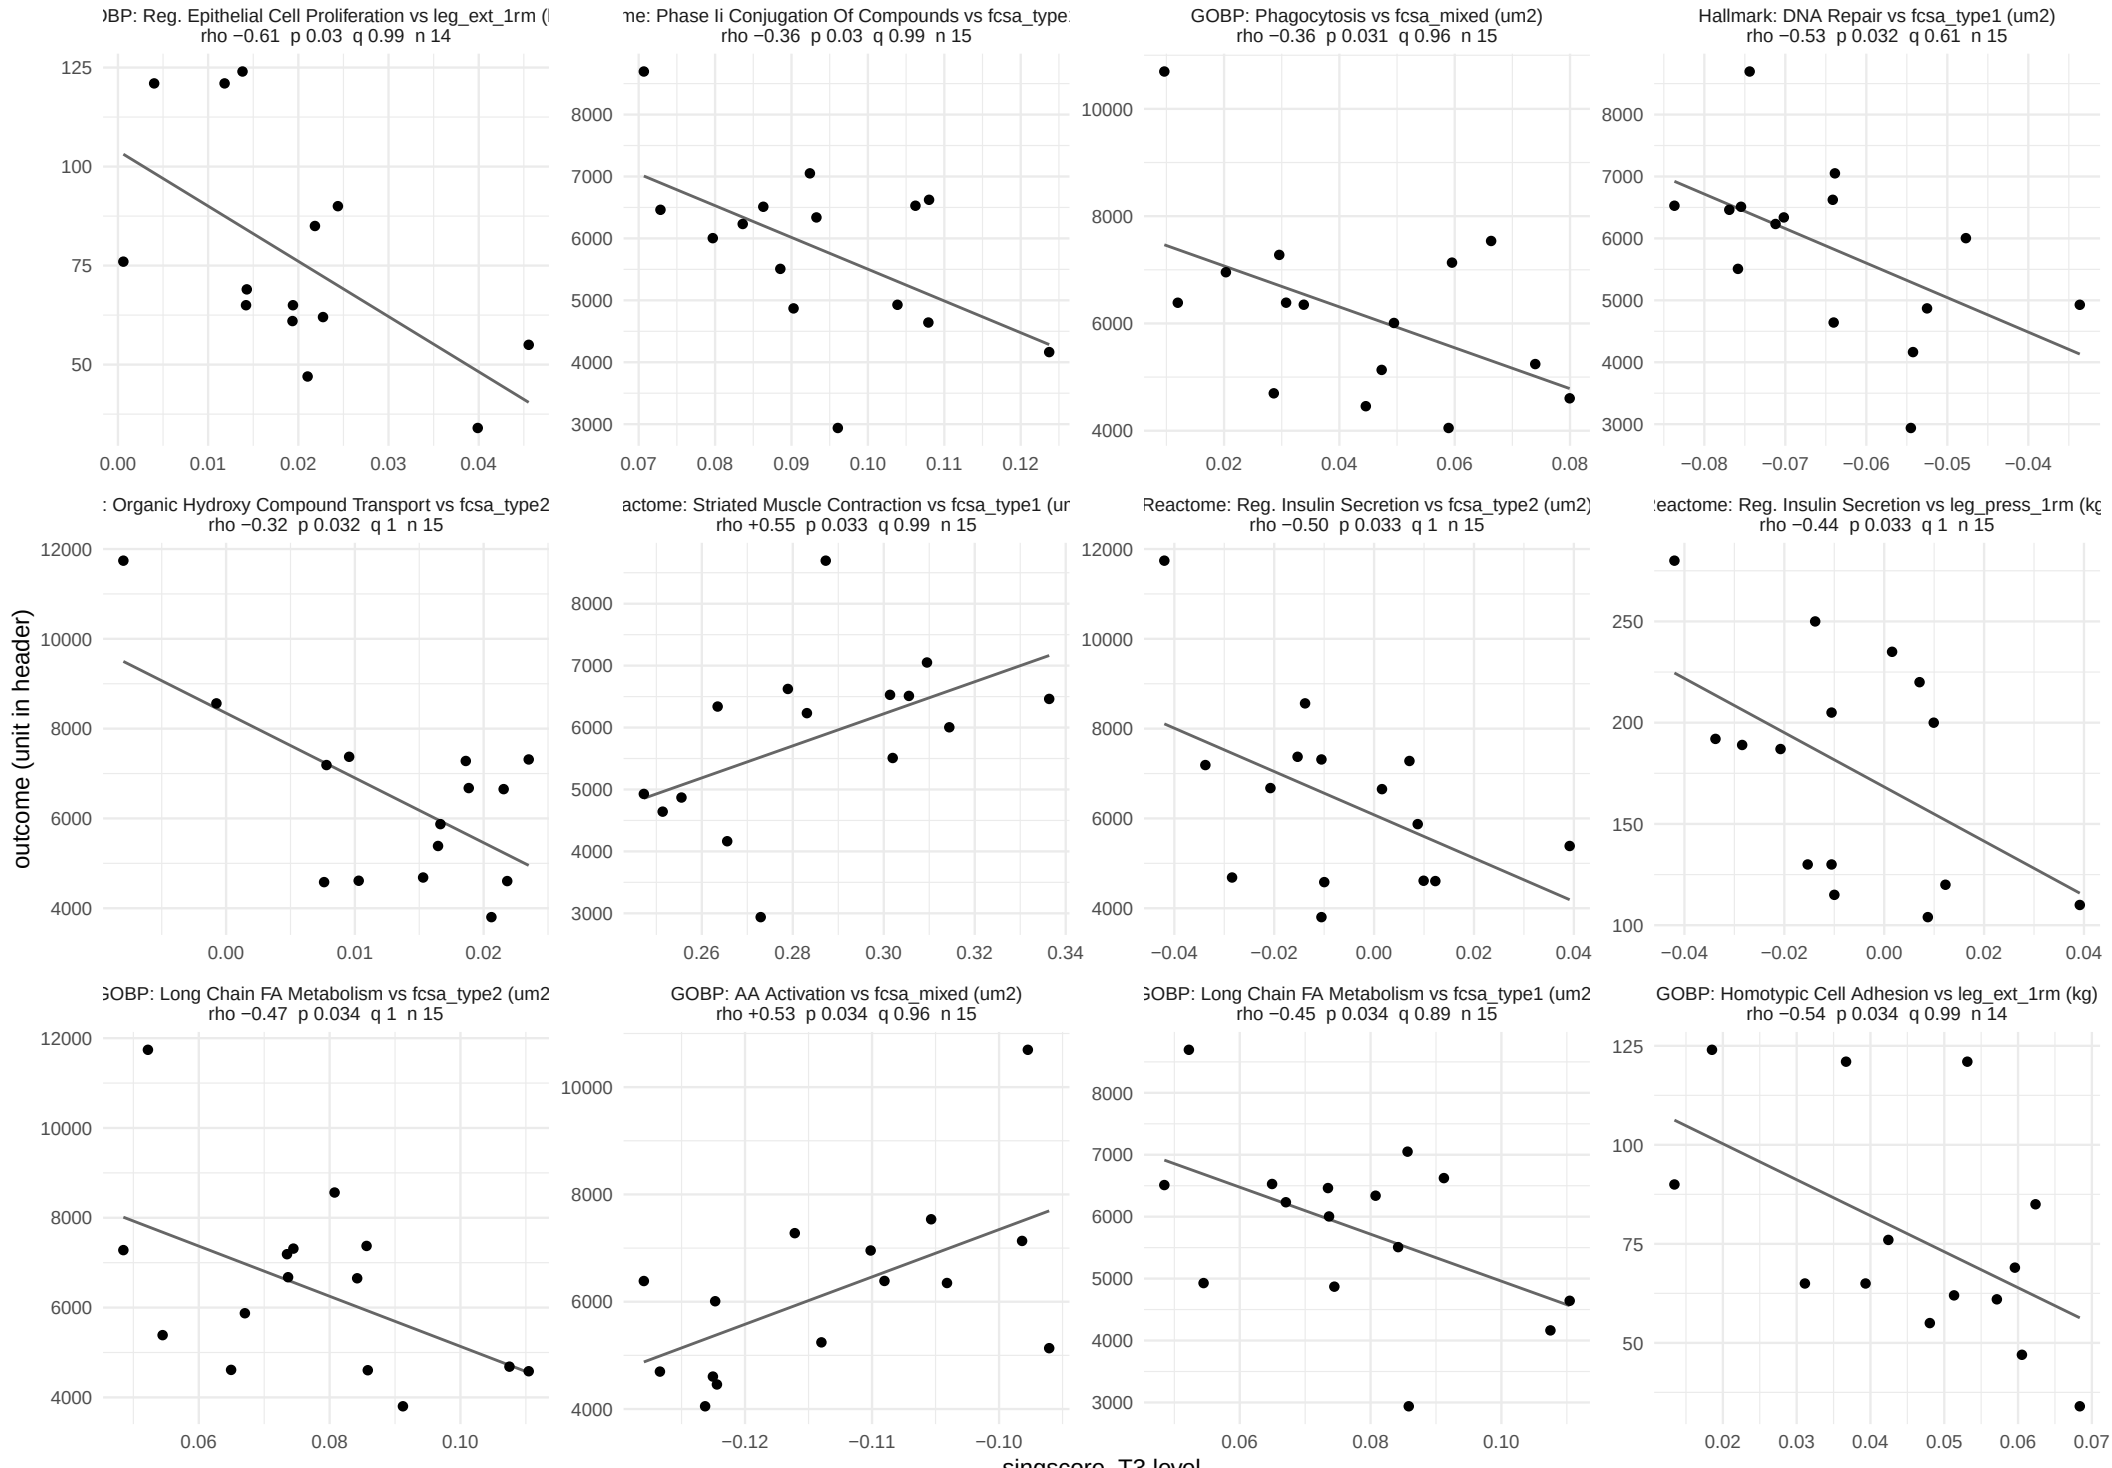

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, post_bout_level window


249 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 14 of 21.

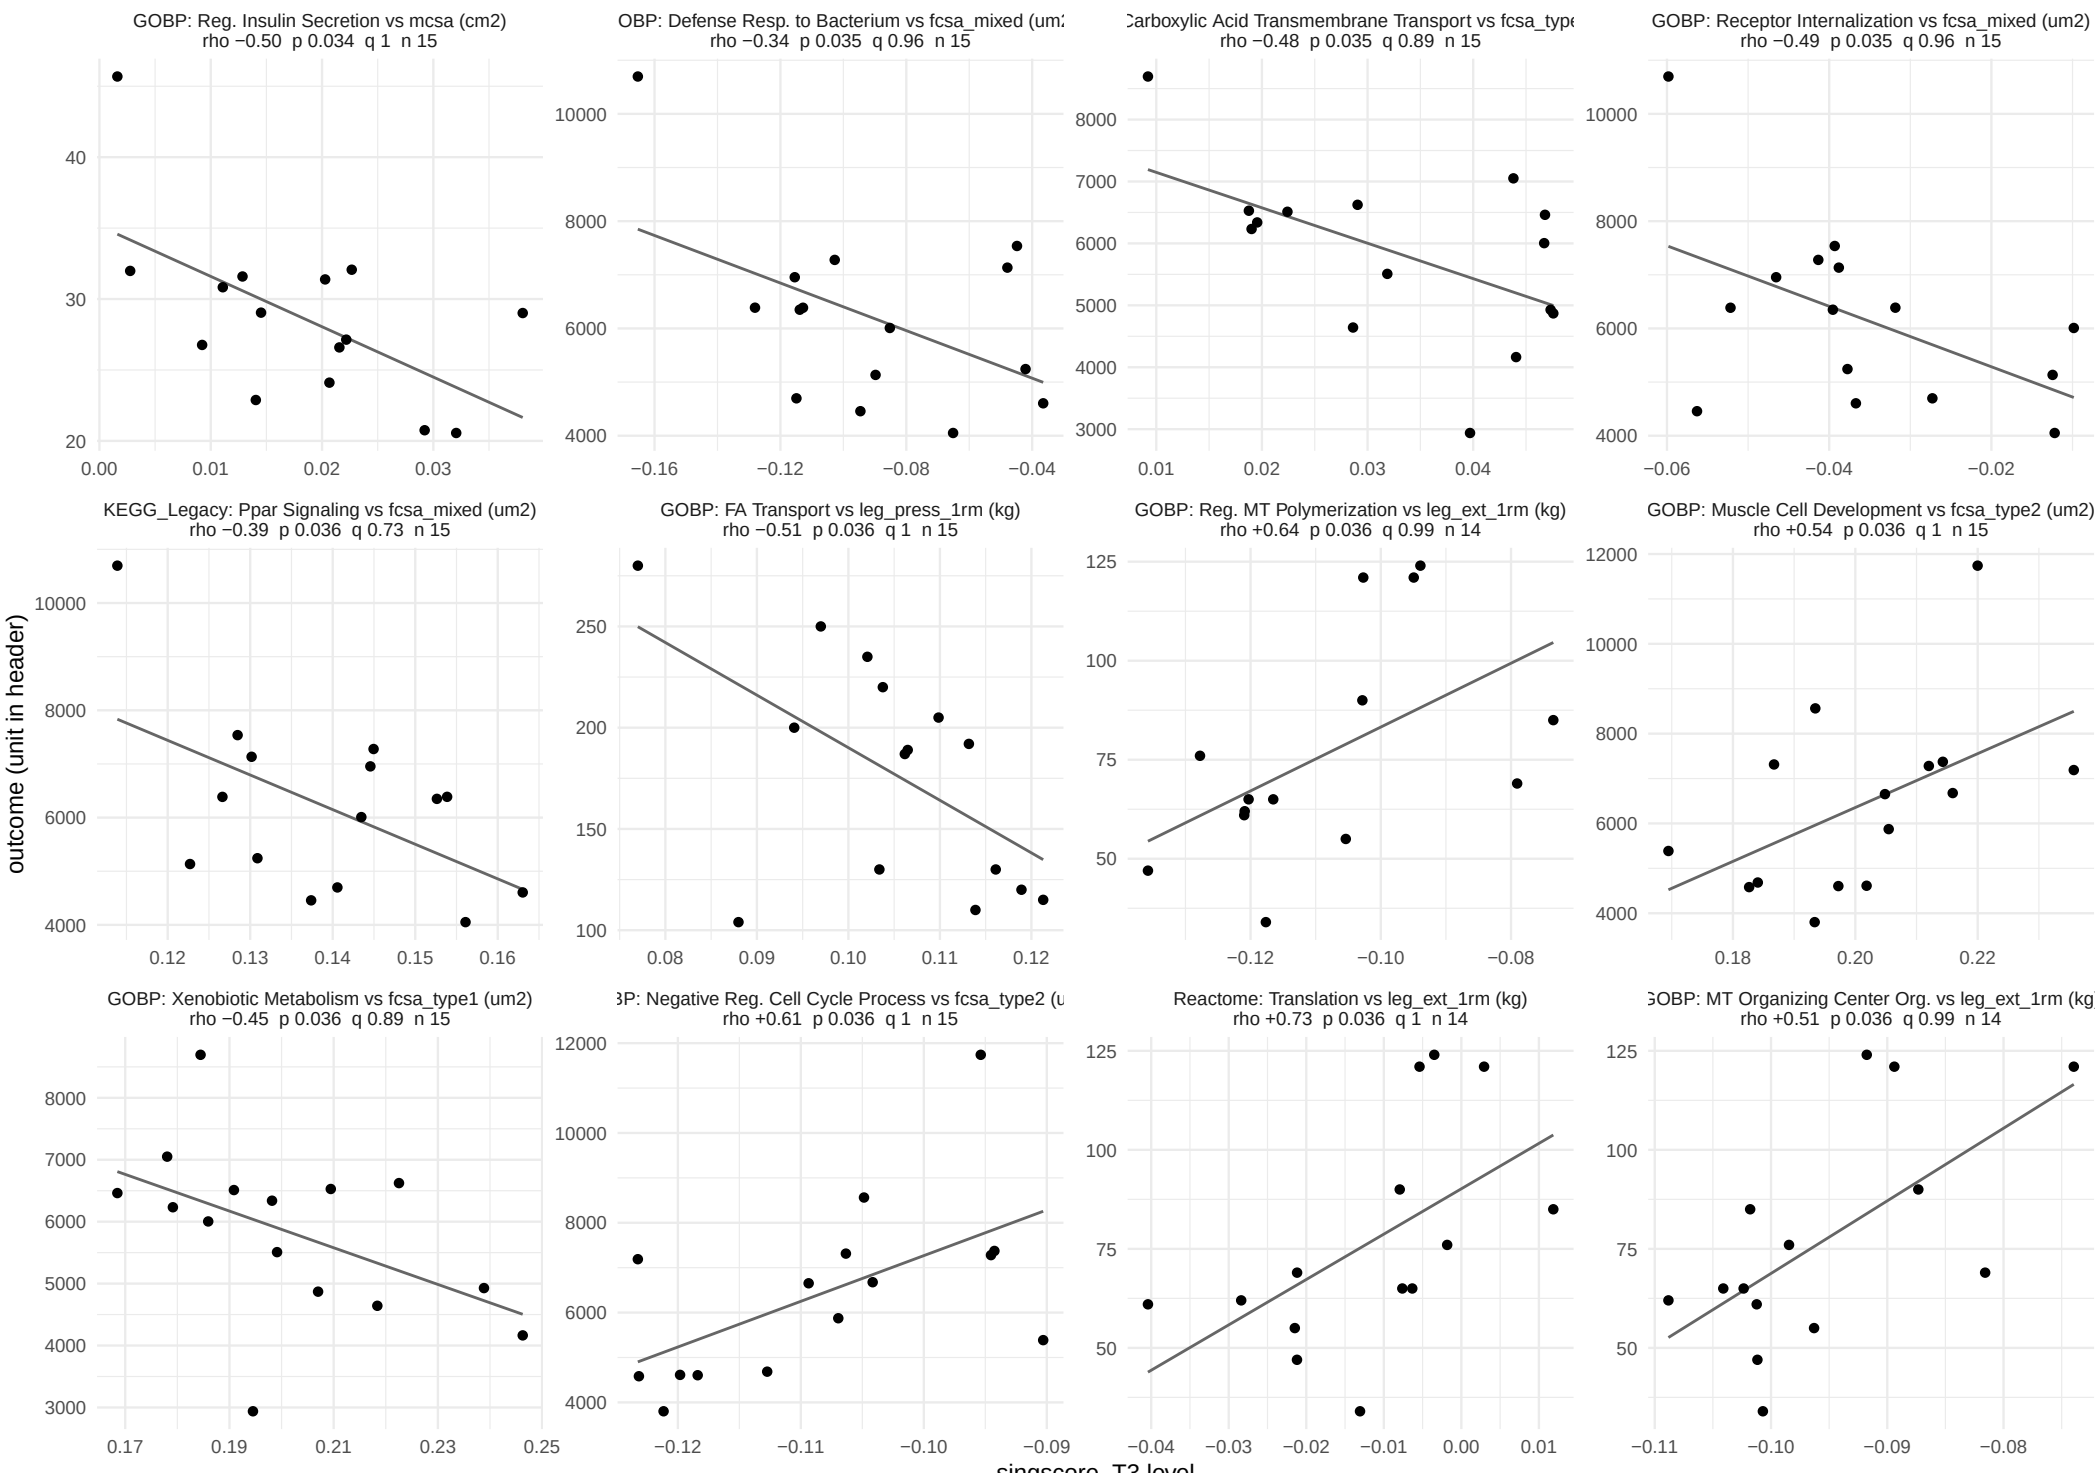

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, post_bout_level window


249 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 15 of 21.

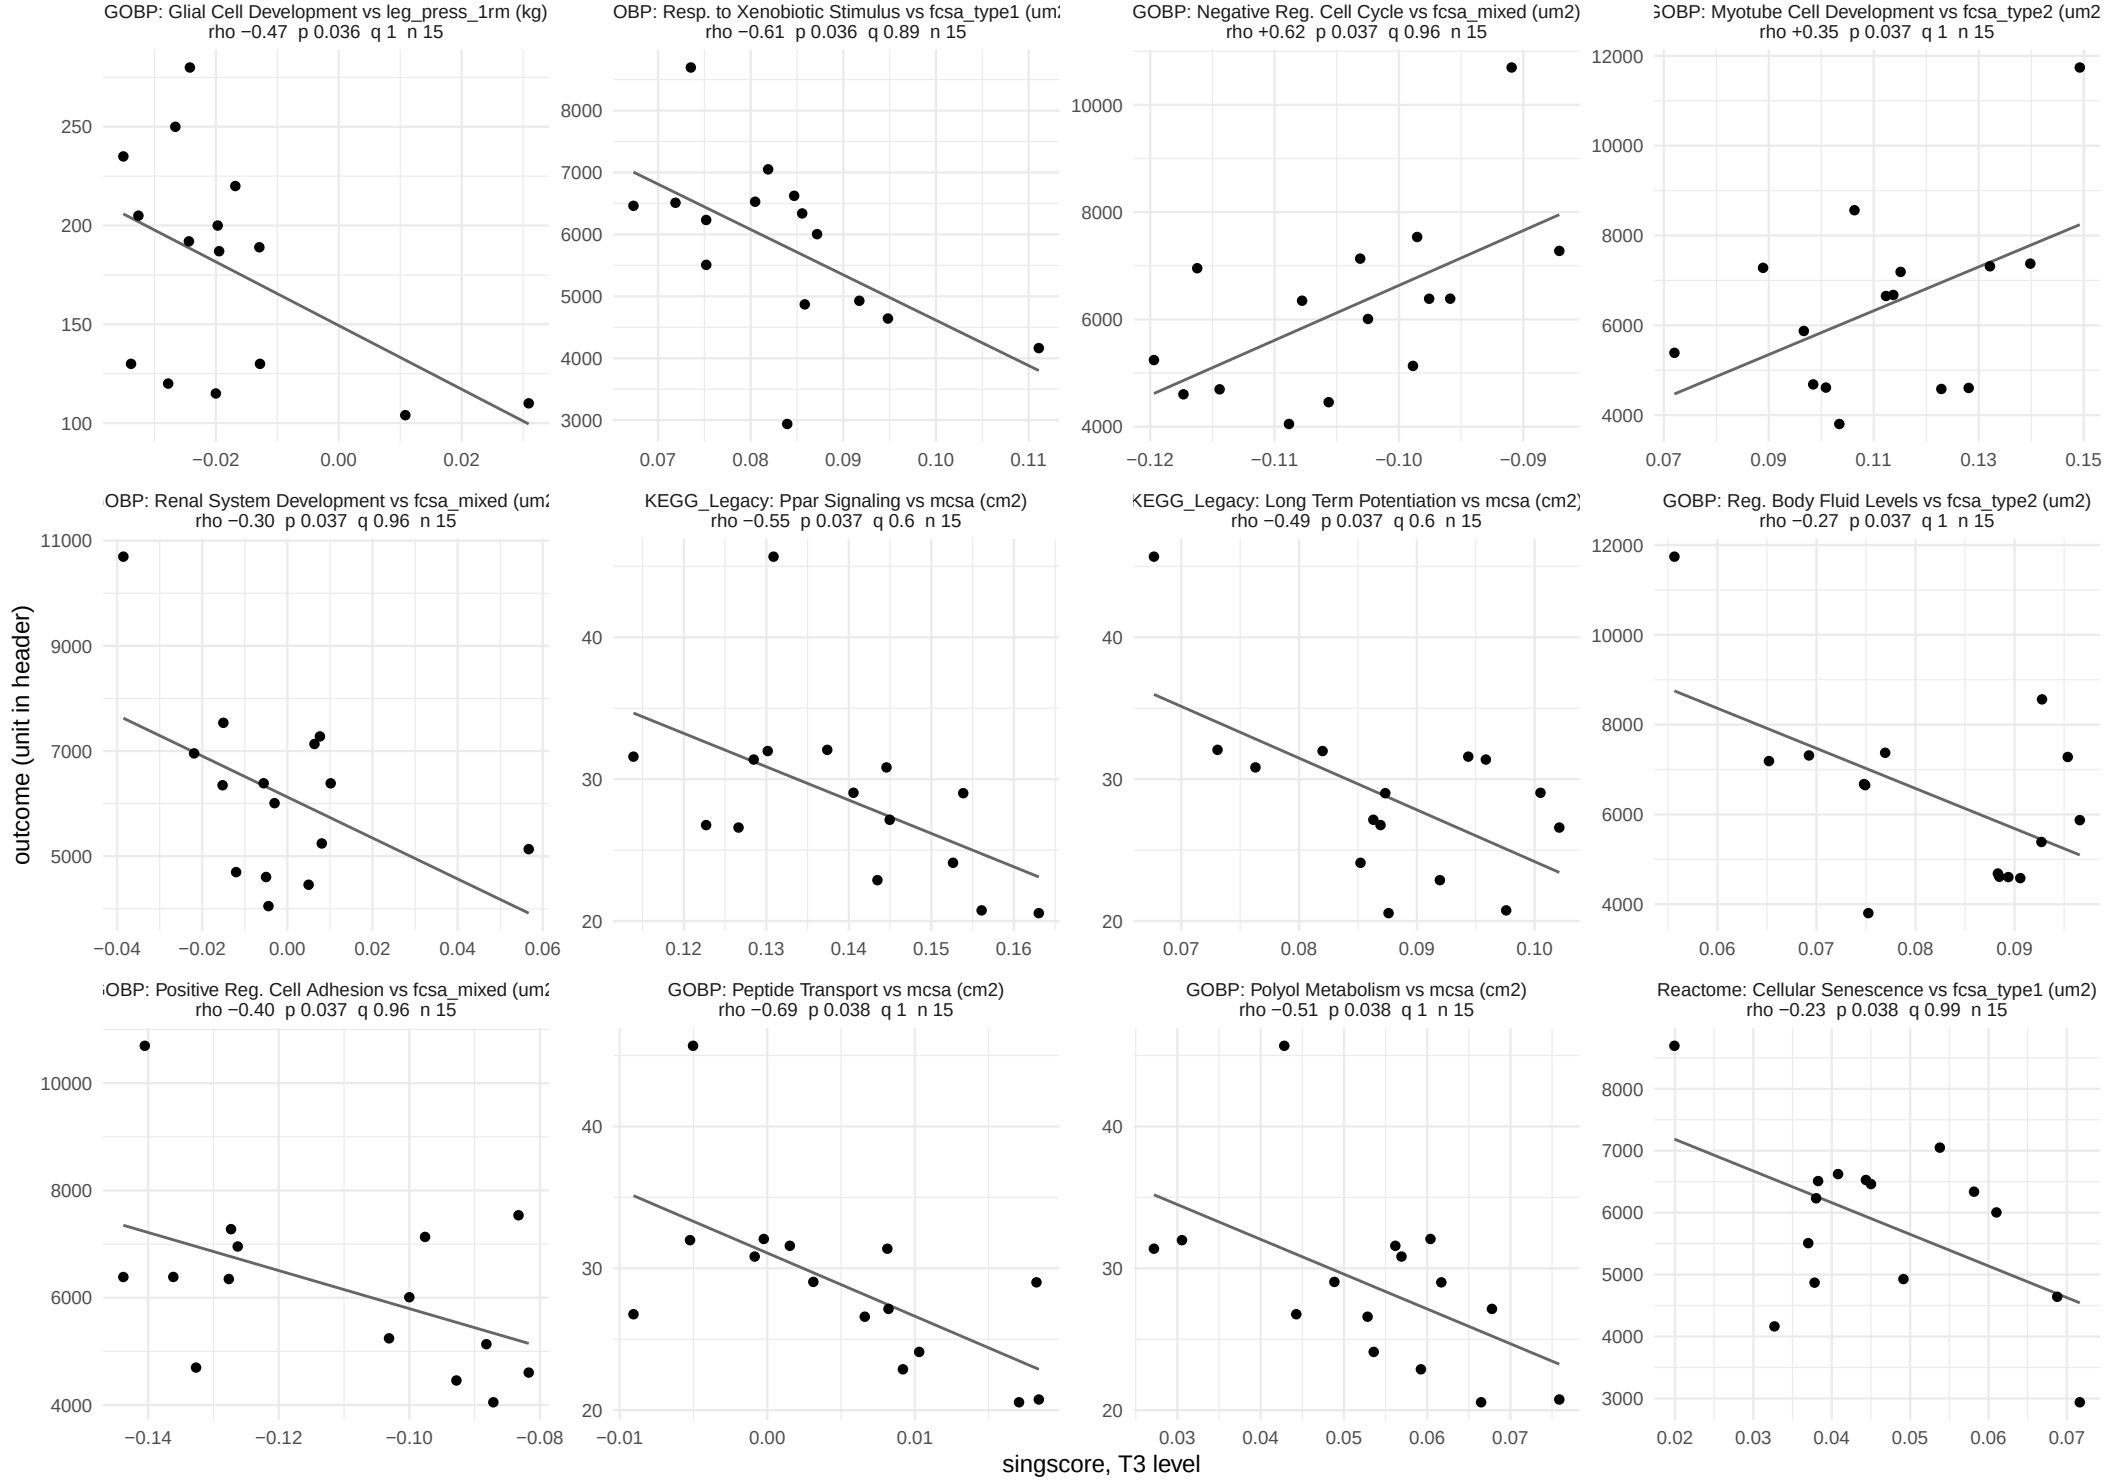

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, post_bout_level window


249 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 16 of 21.

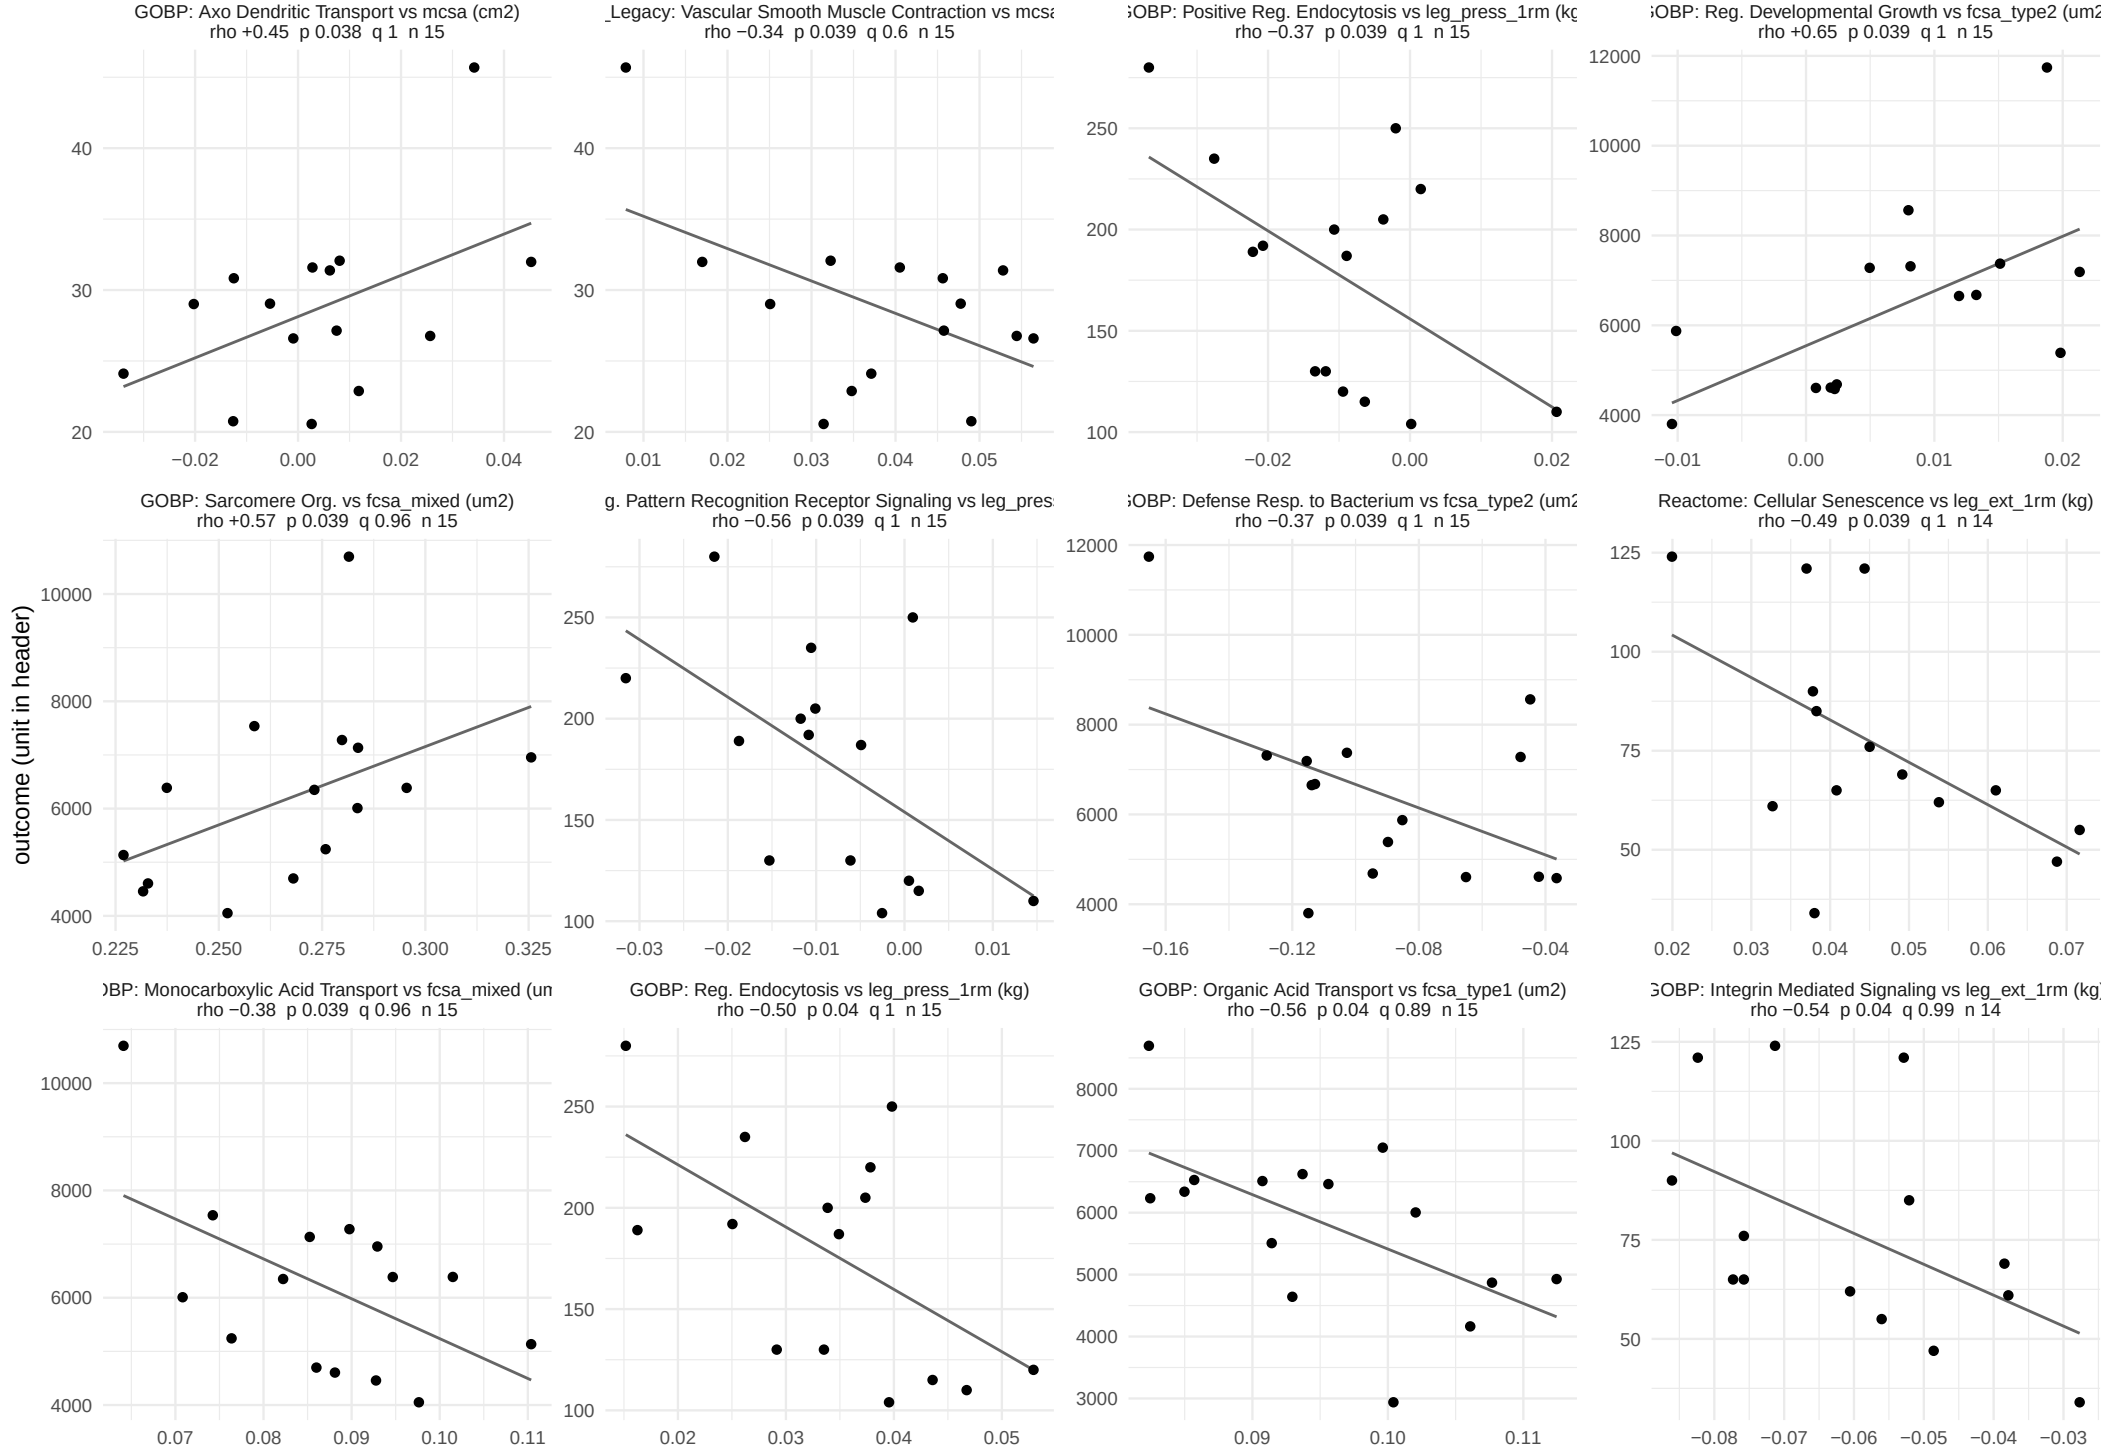

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, post_bout_level window


249 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 17 of 21.

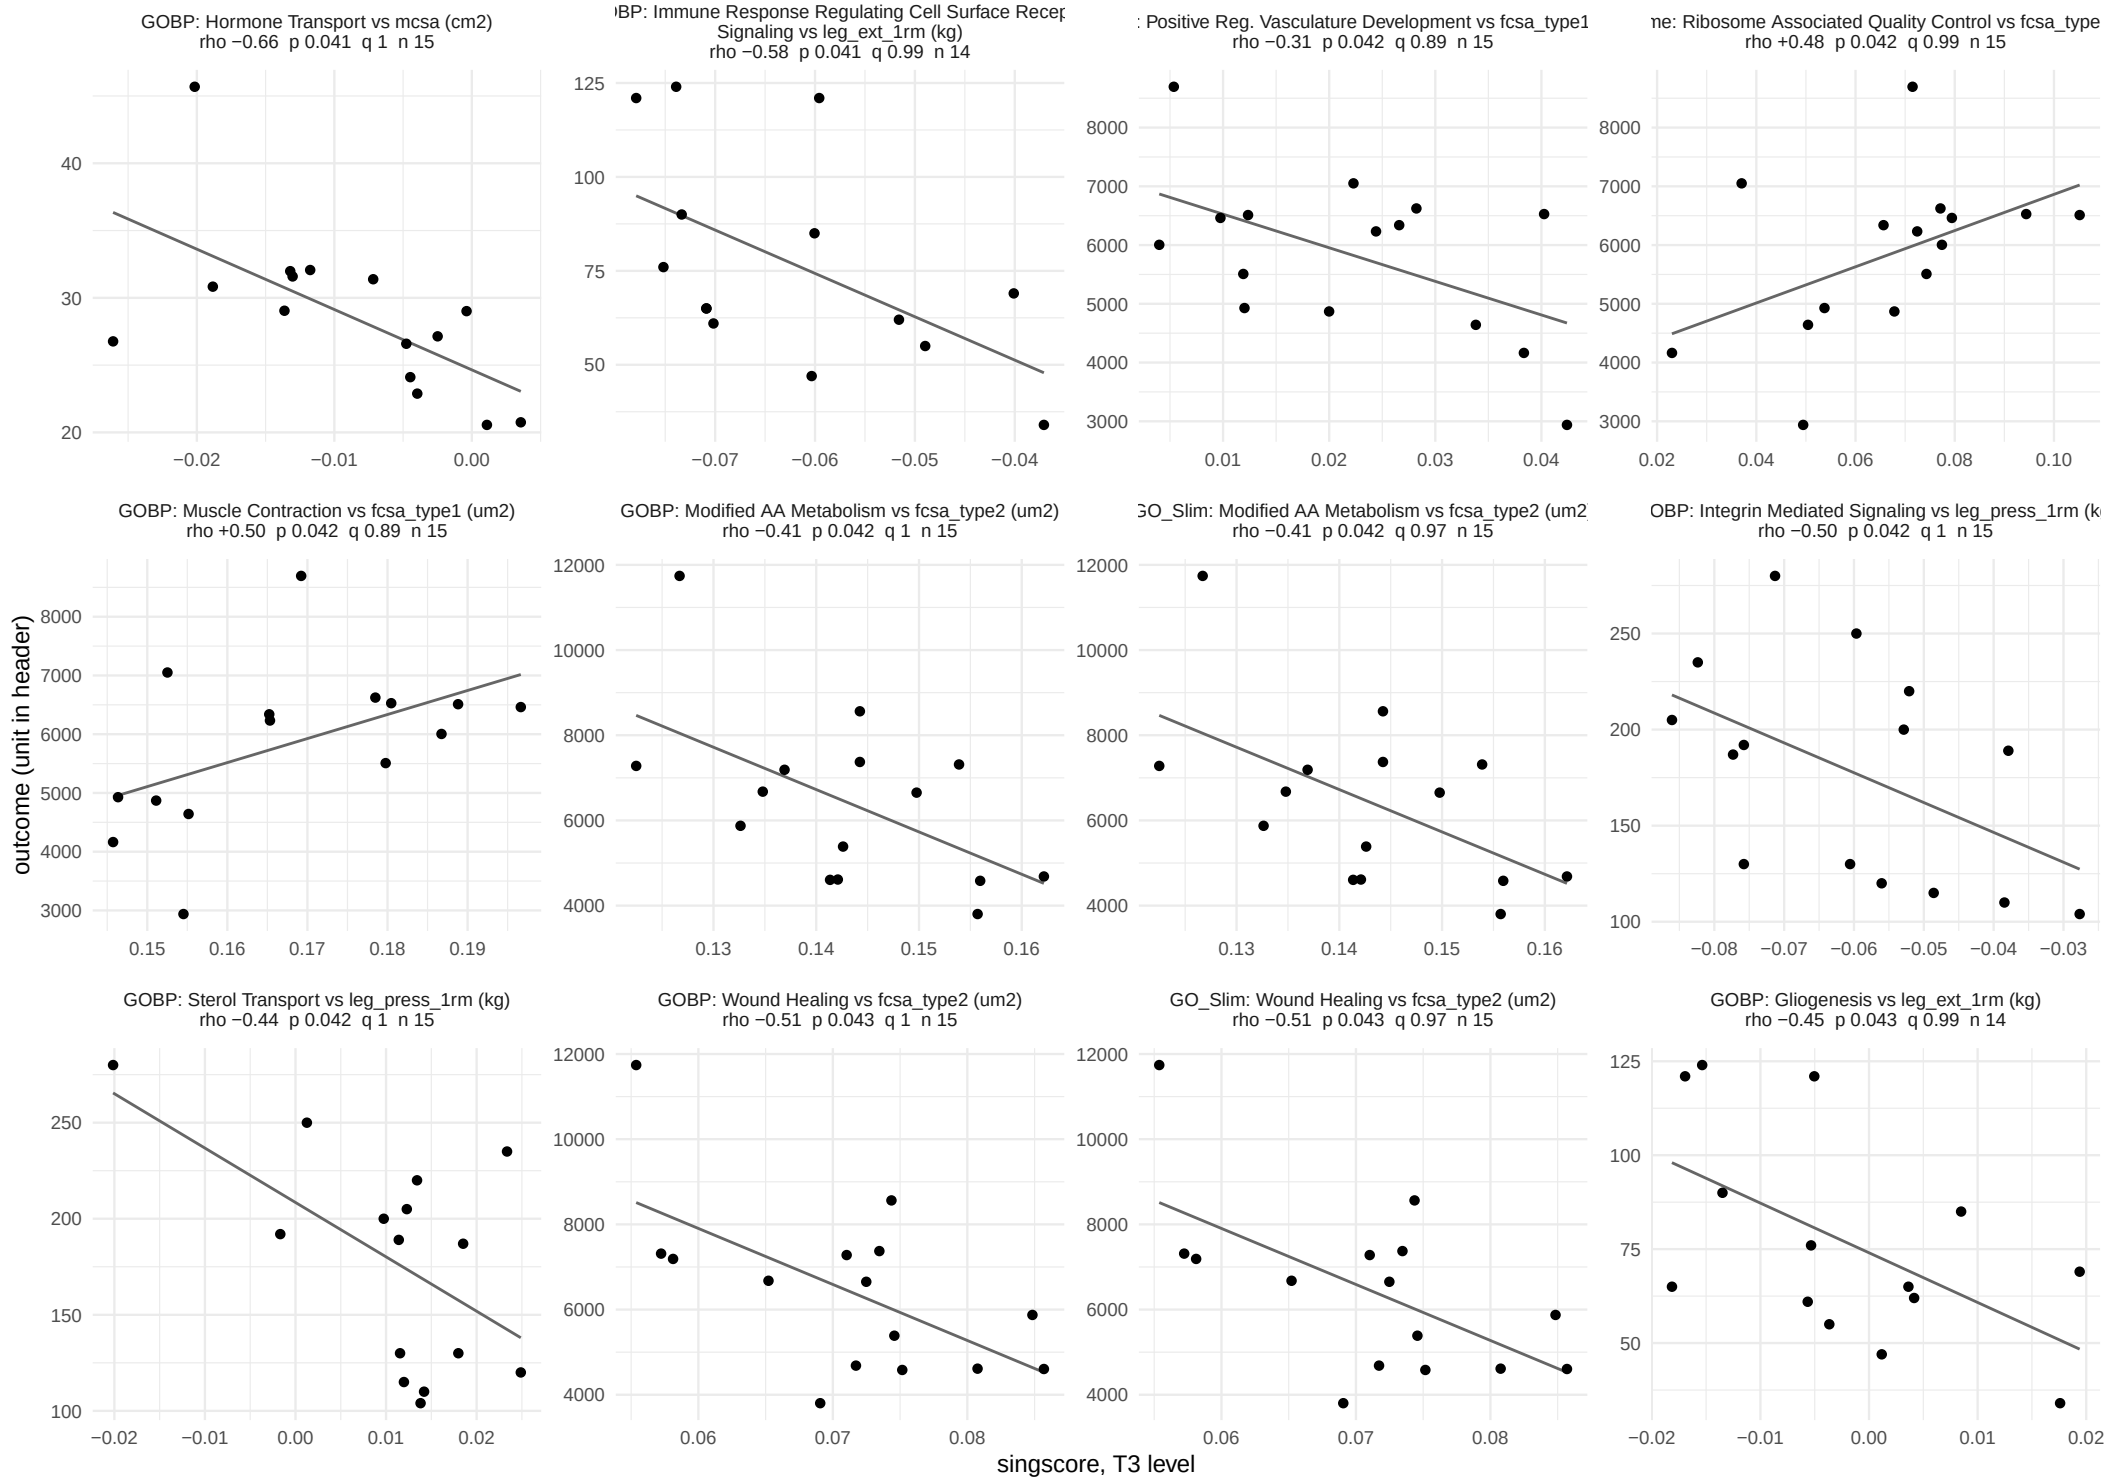

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, post_bout_level window


249 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 18 of 21.

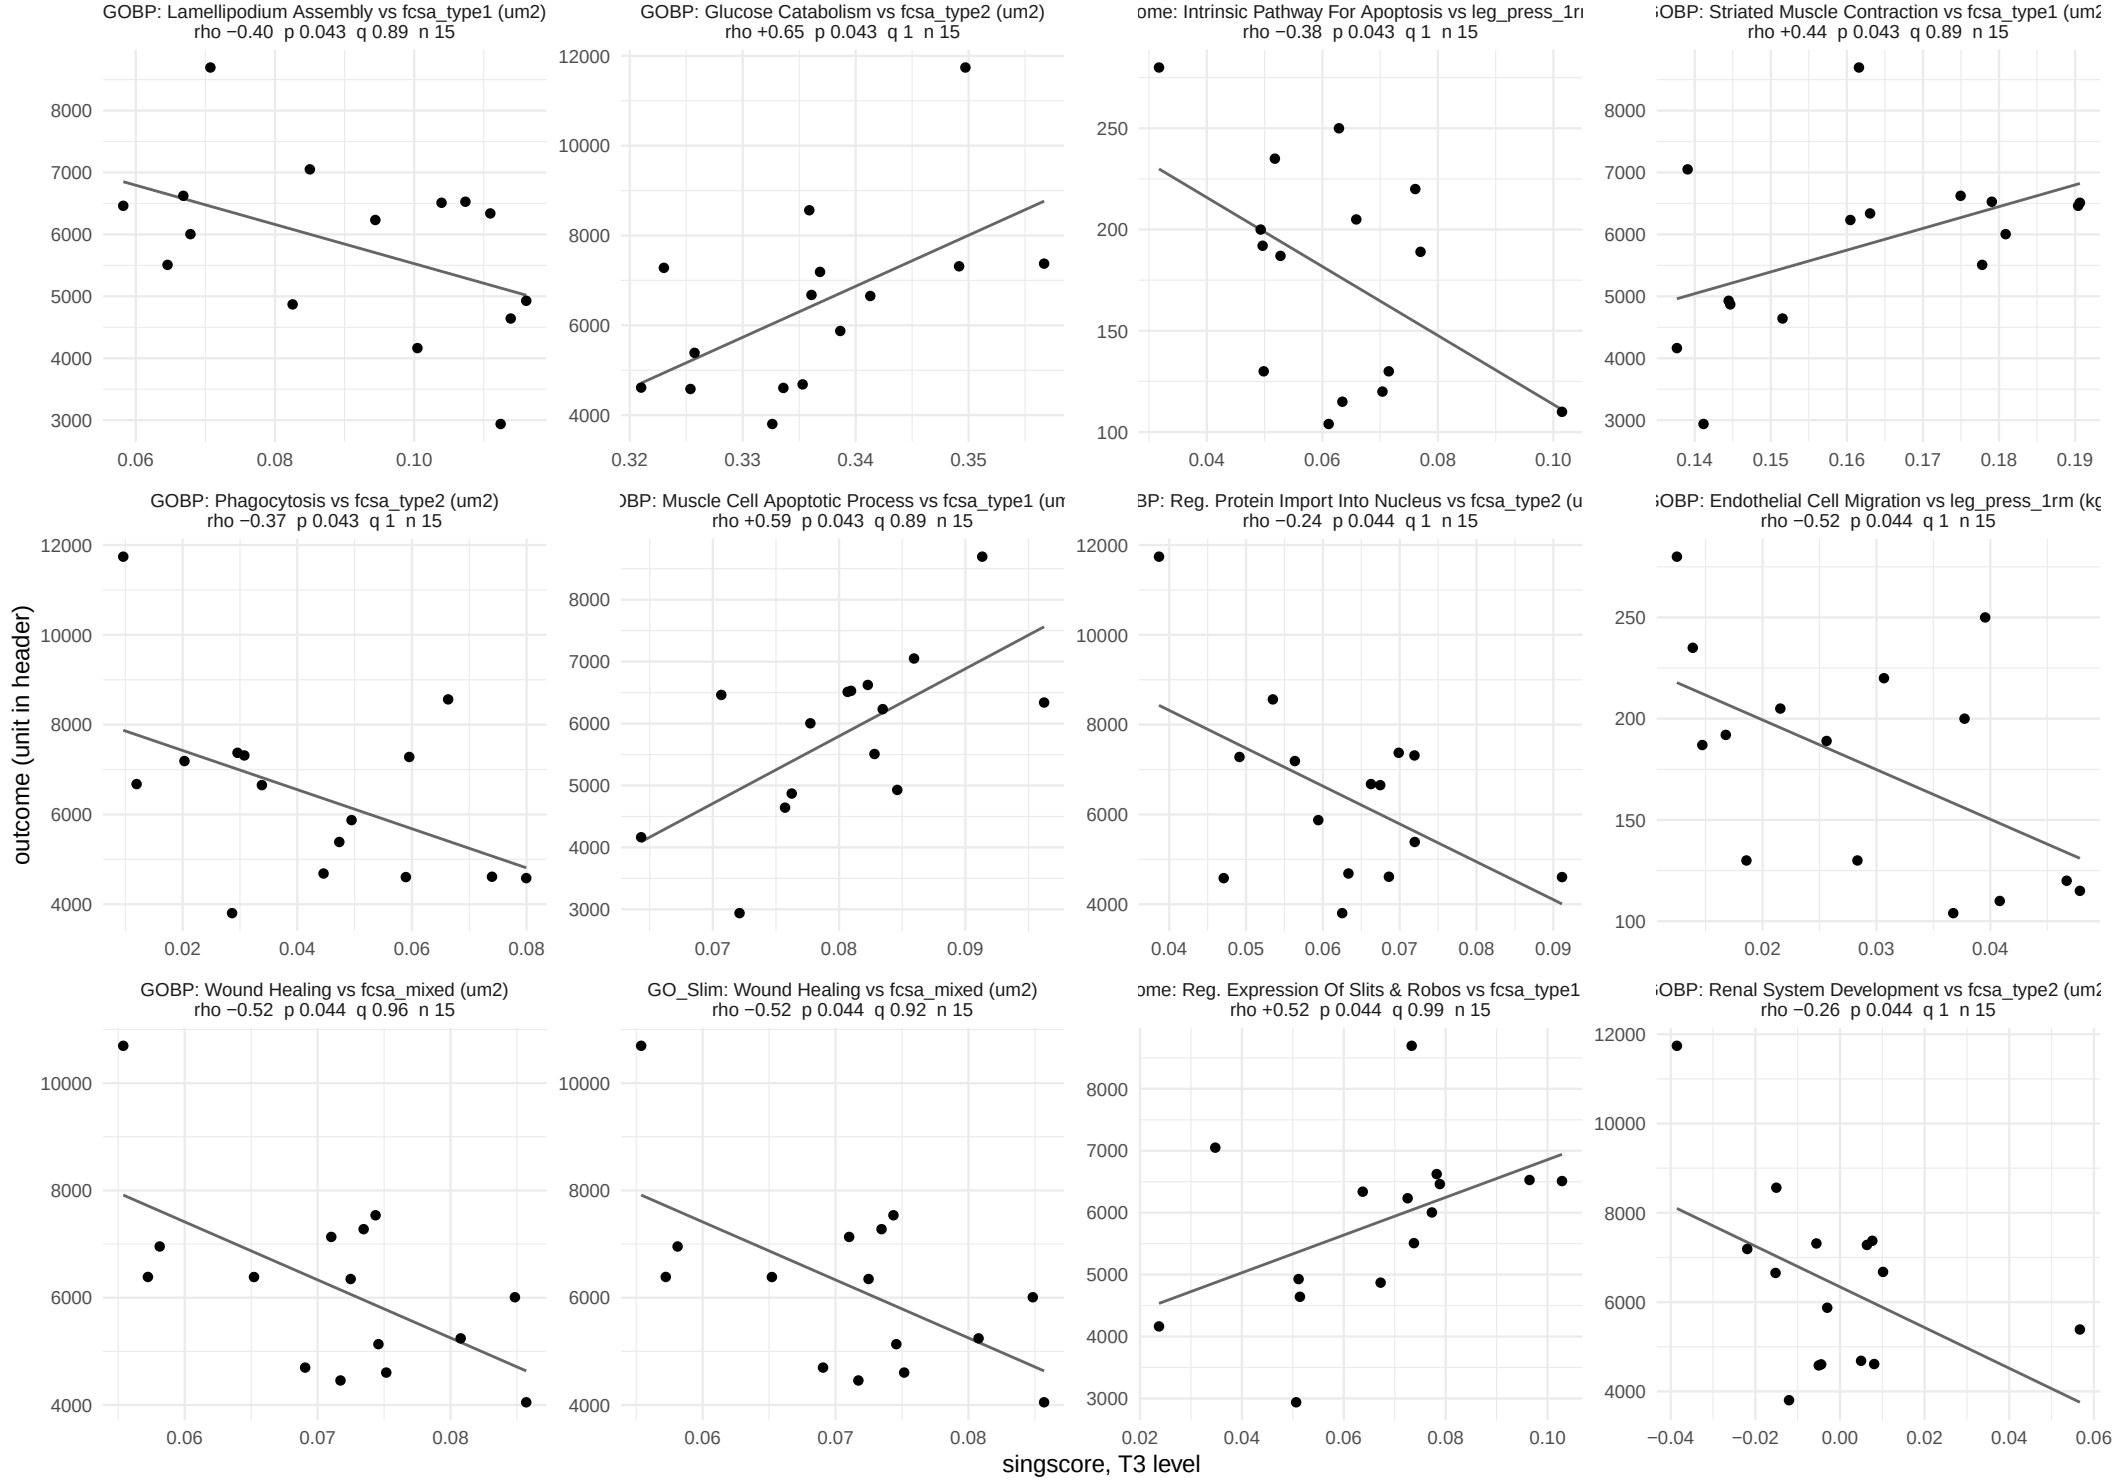

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, post_bout_level window


249 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 19 of 21.

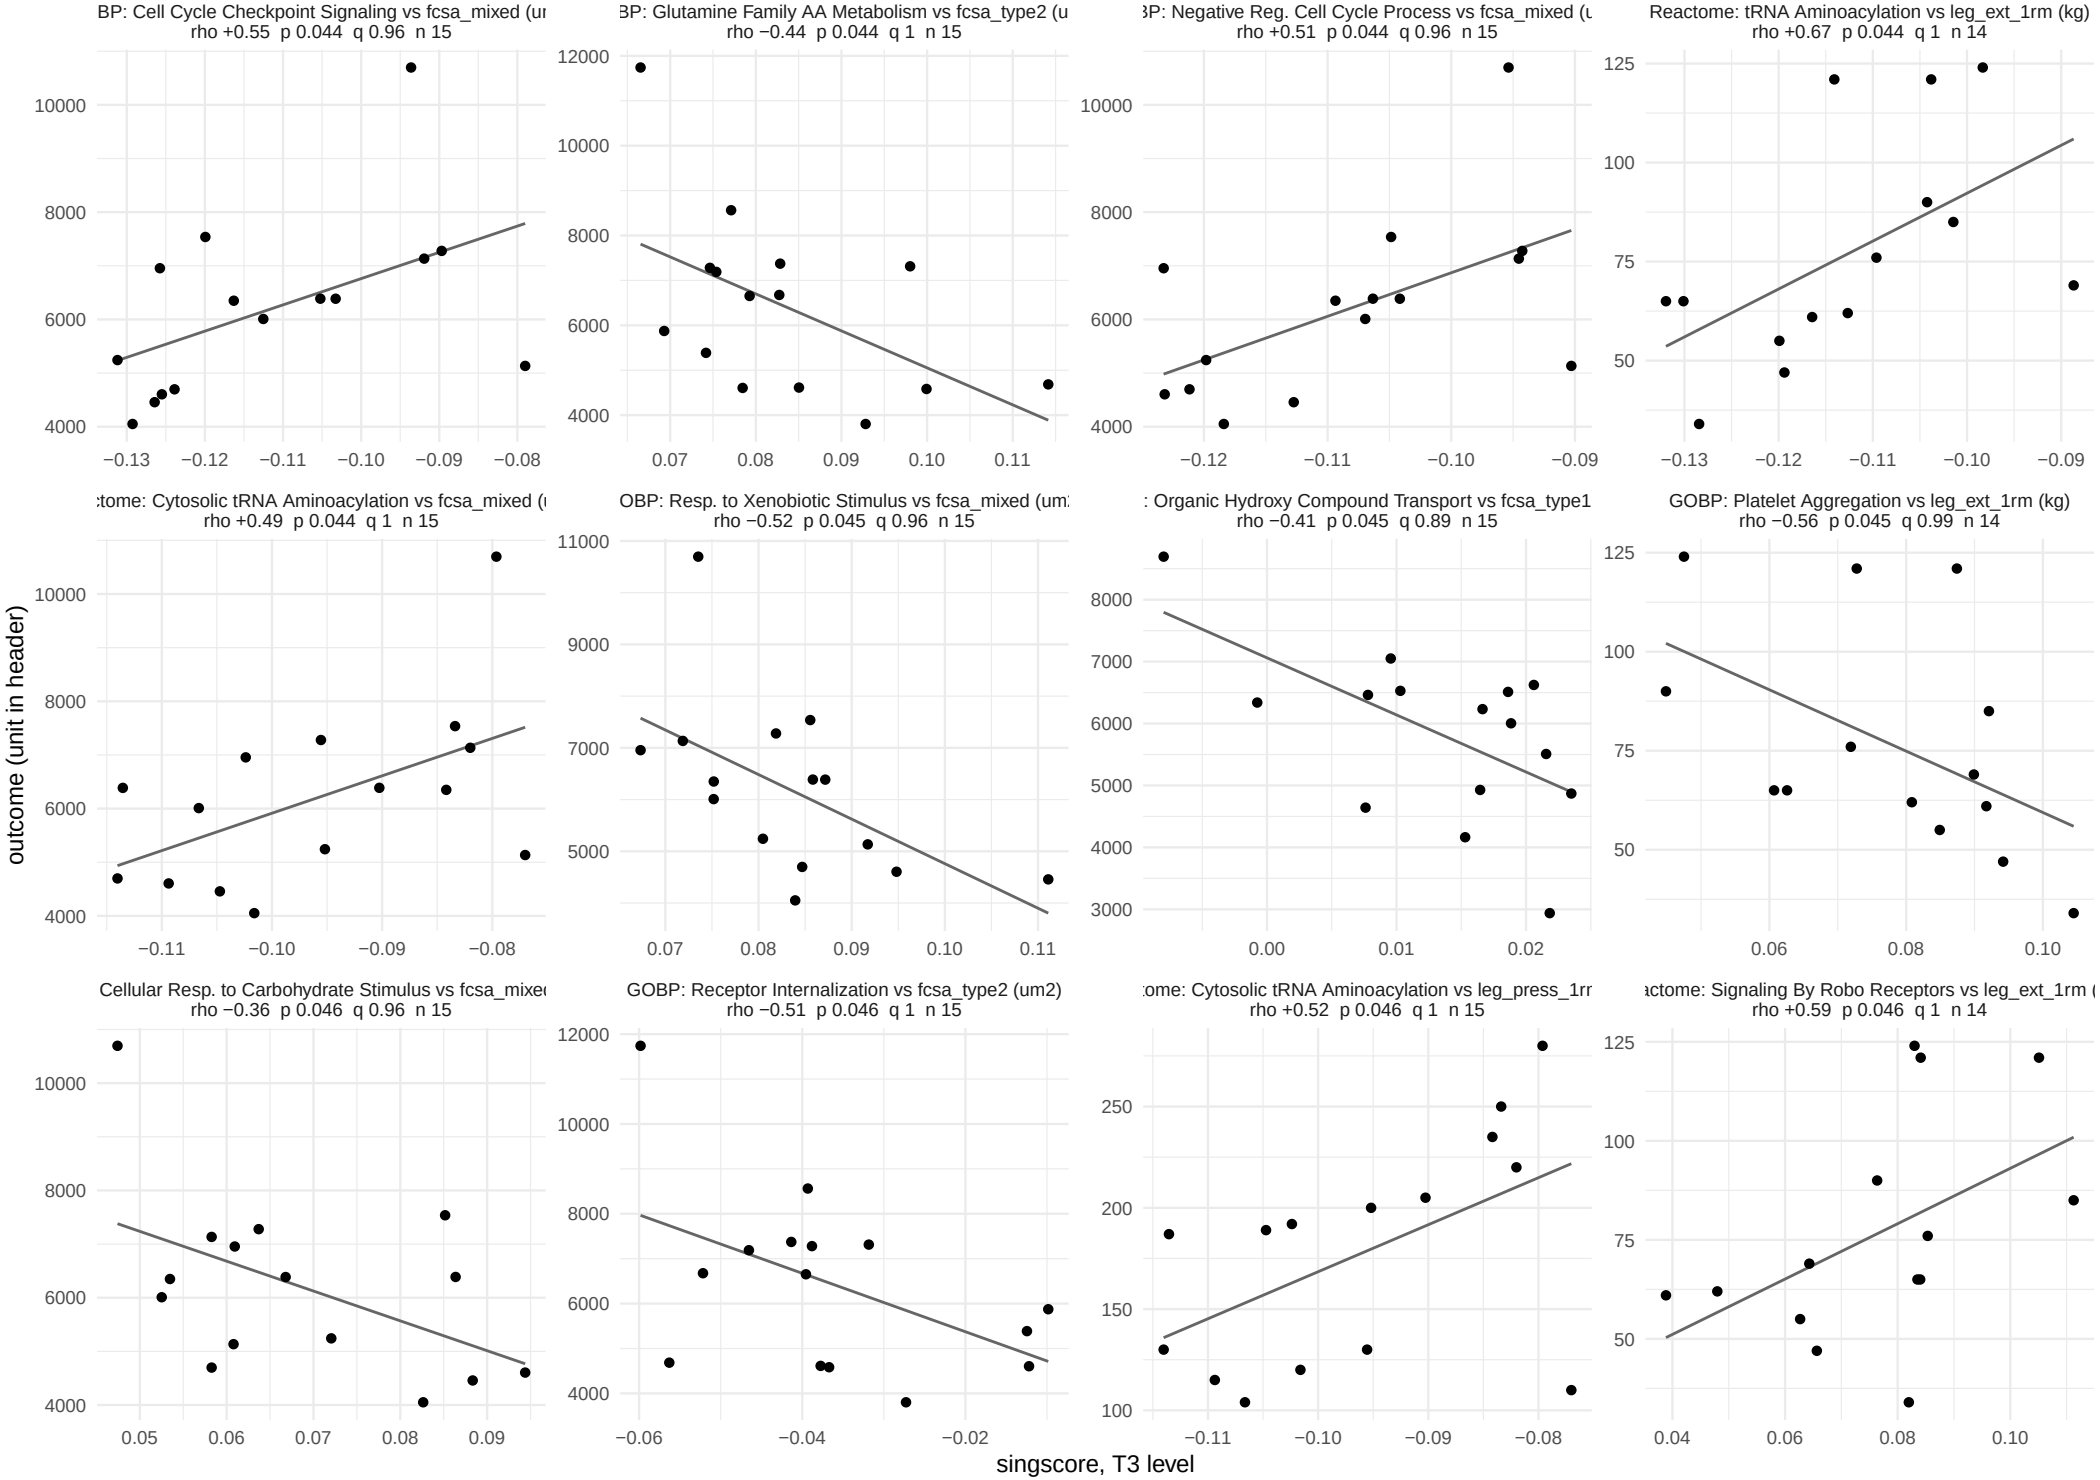

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, post_bout_level window


249 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 20 of 21.

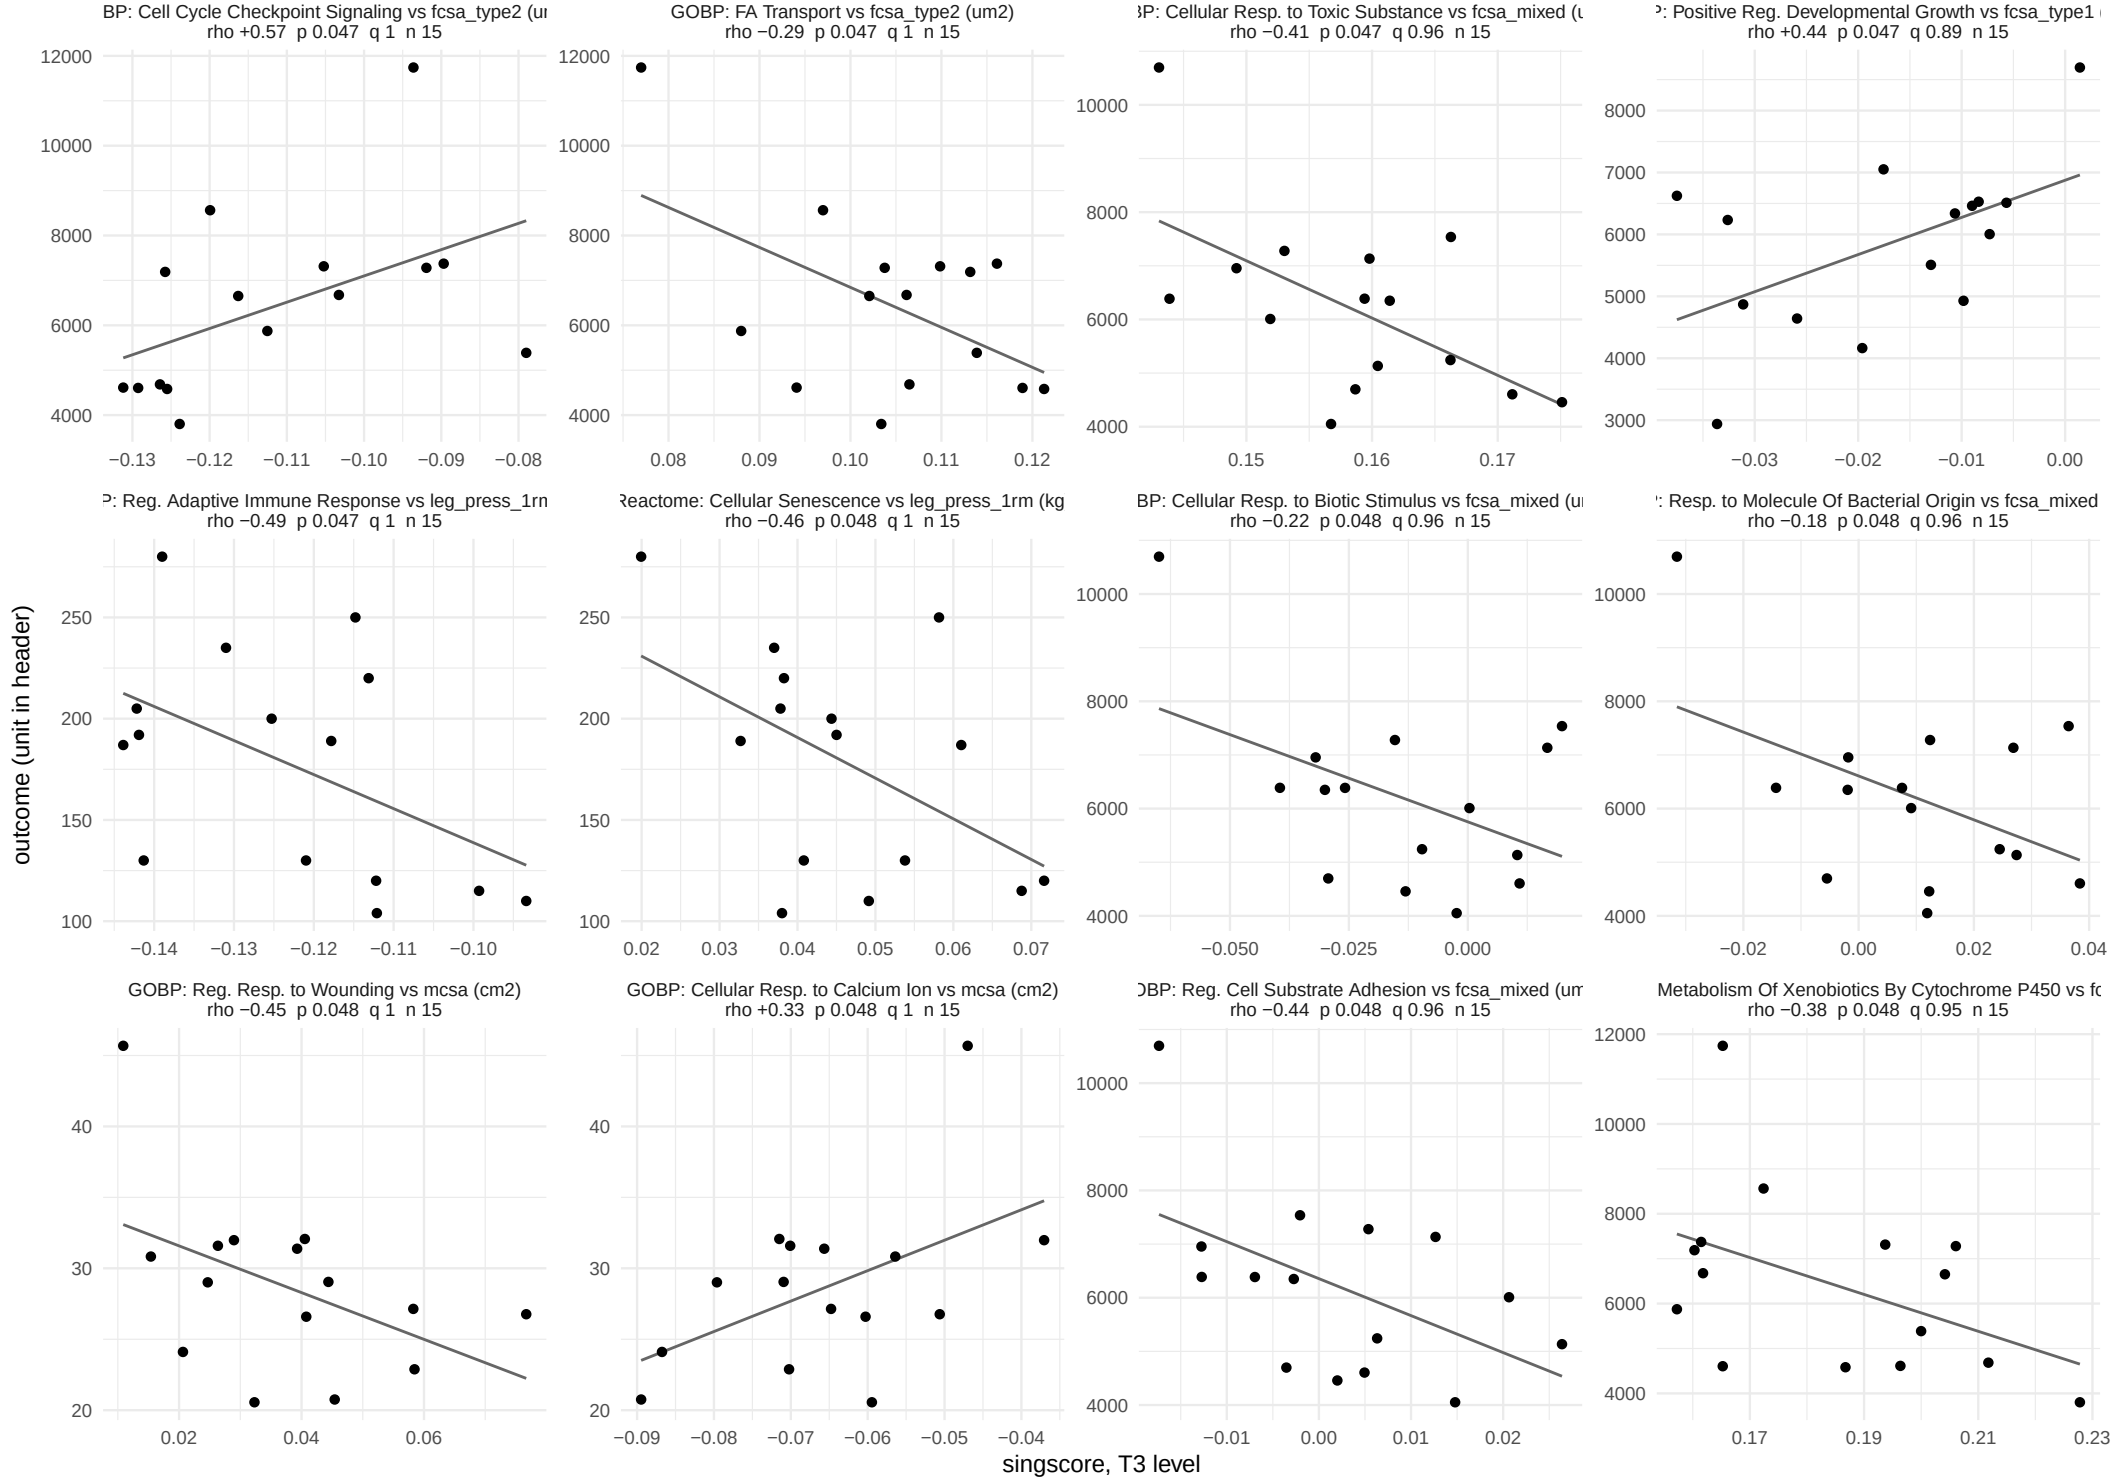

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Change score, post_bout_level window


249 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 21 of 21.

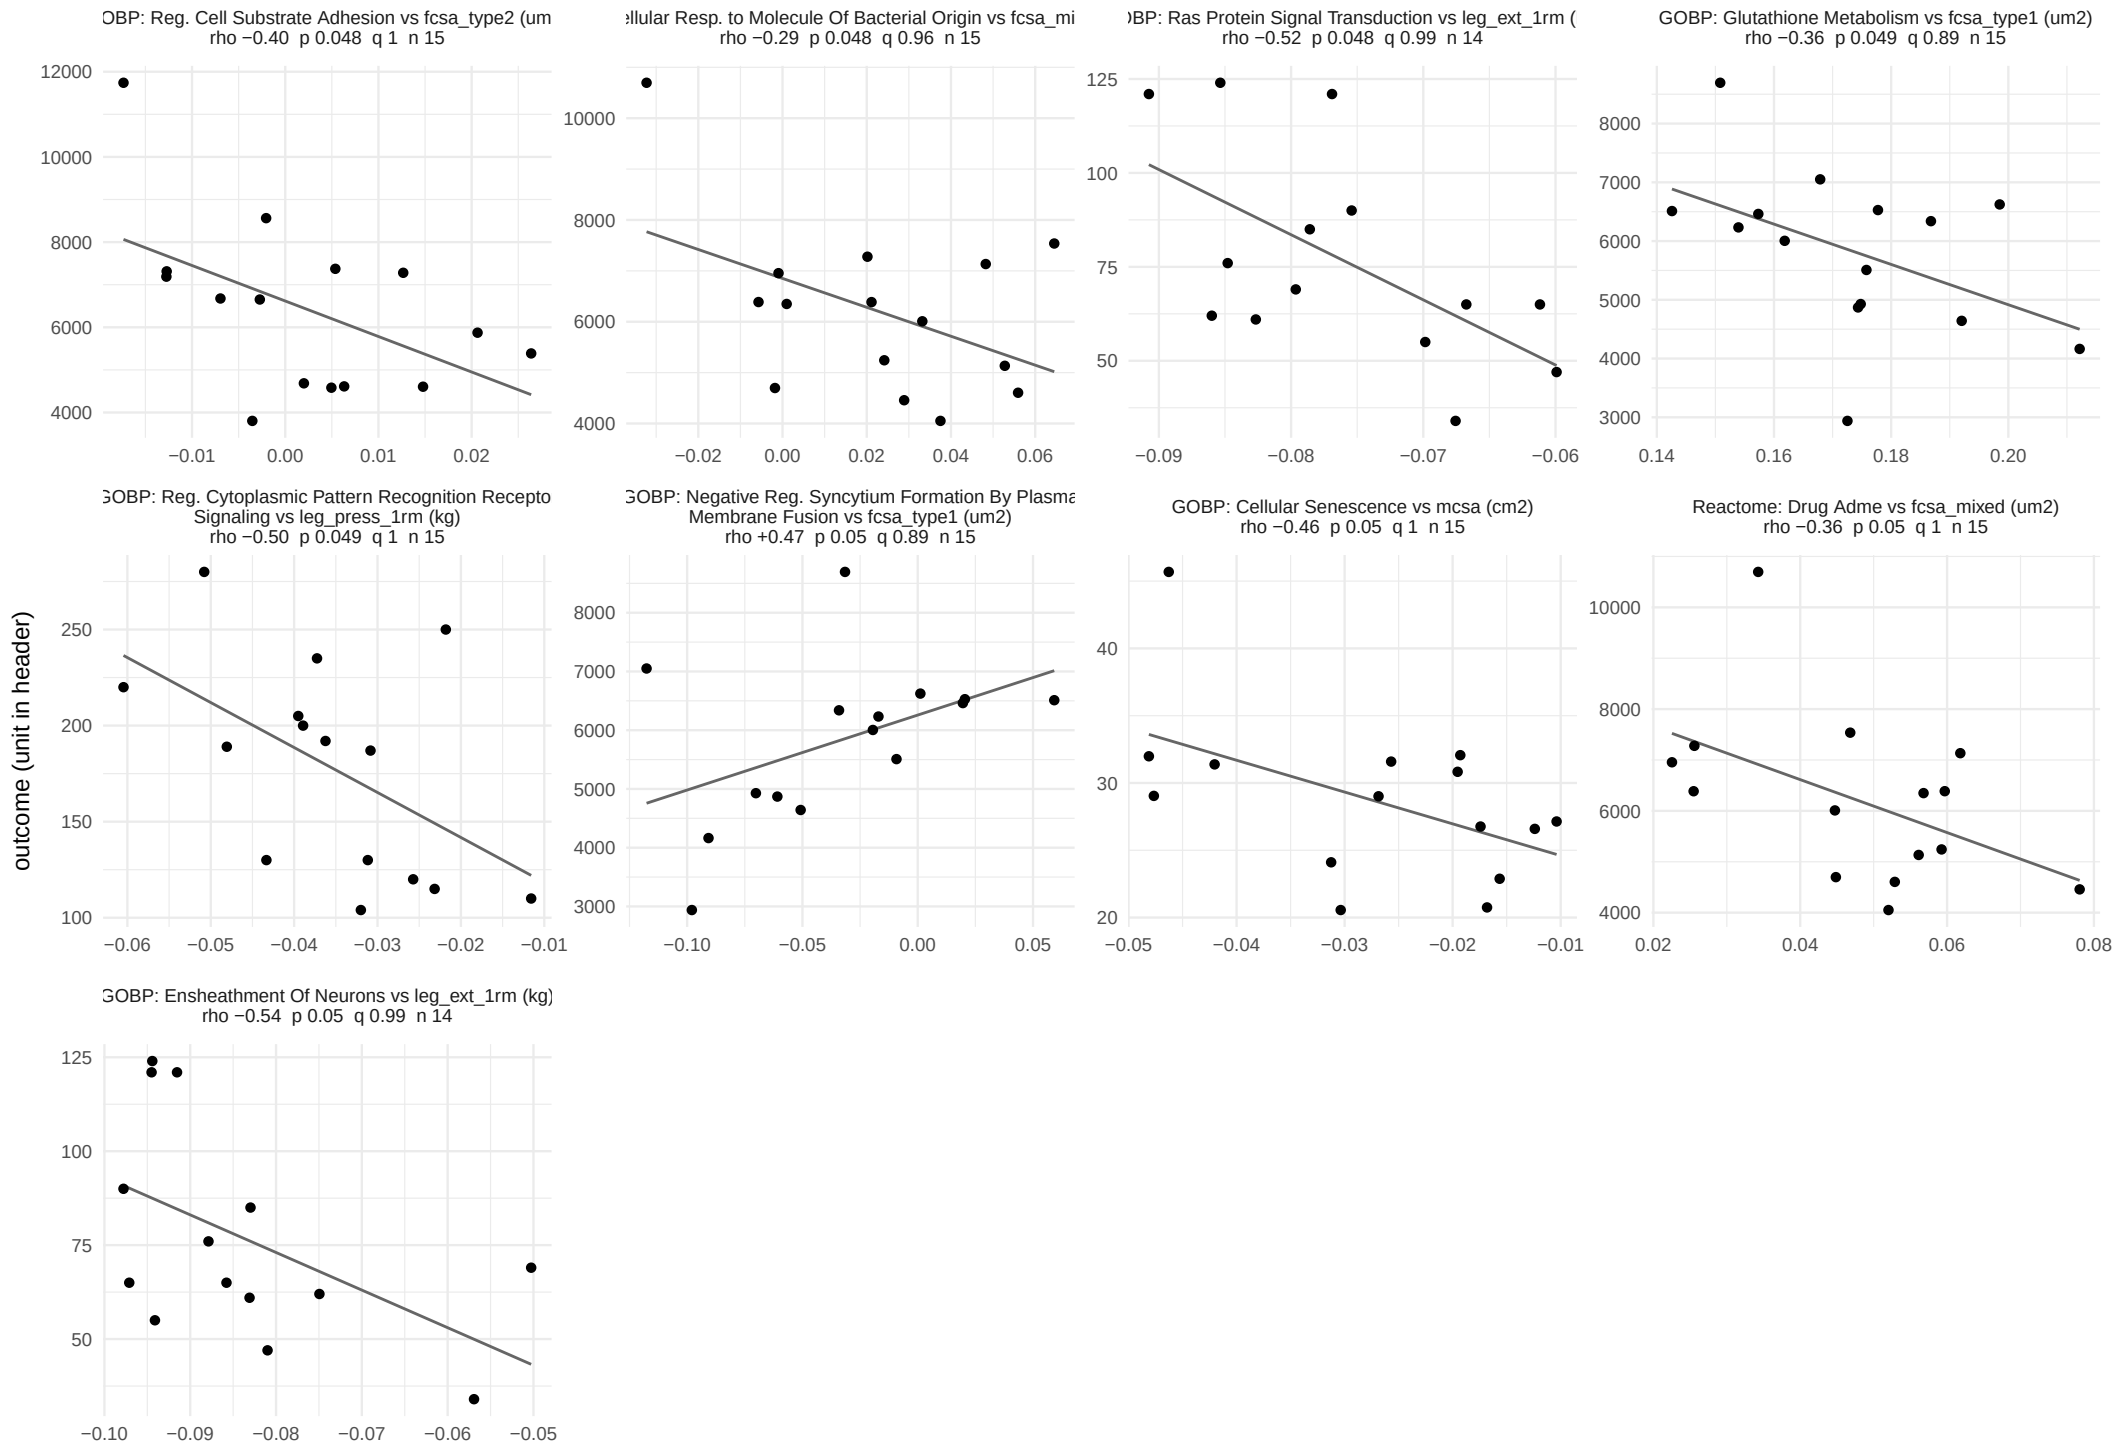

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, outcome and collection, with the subjects used. Table: c_data/02_sets.xlsx, change_score.

Two predictor, training window


149 of 5512 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 1 of 13.

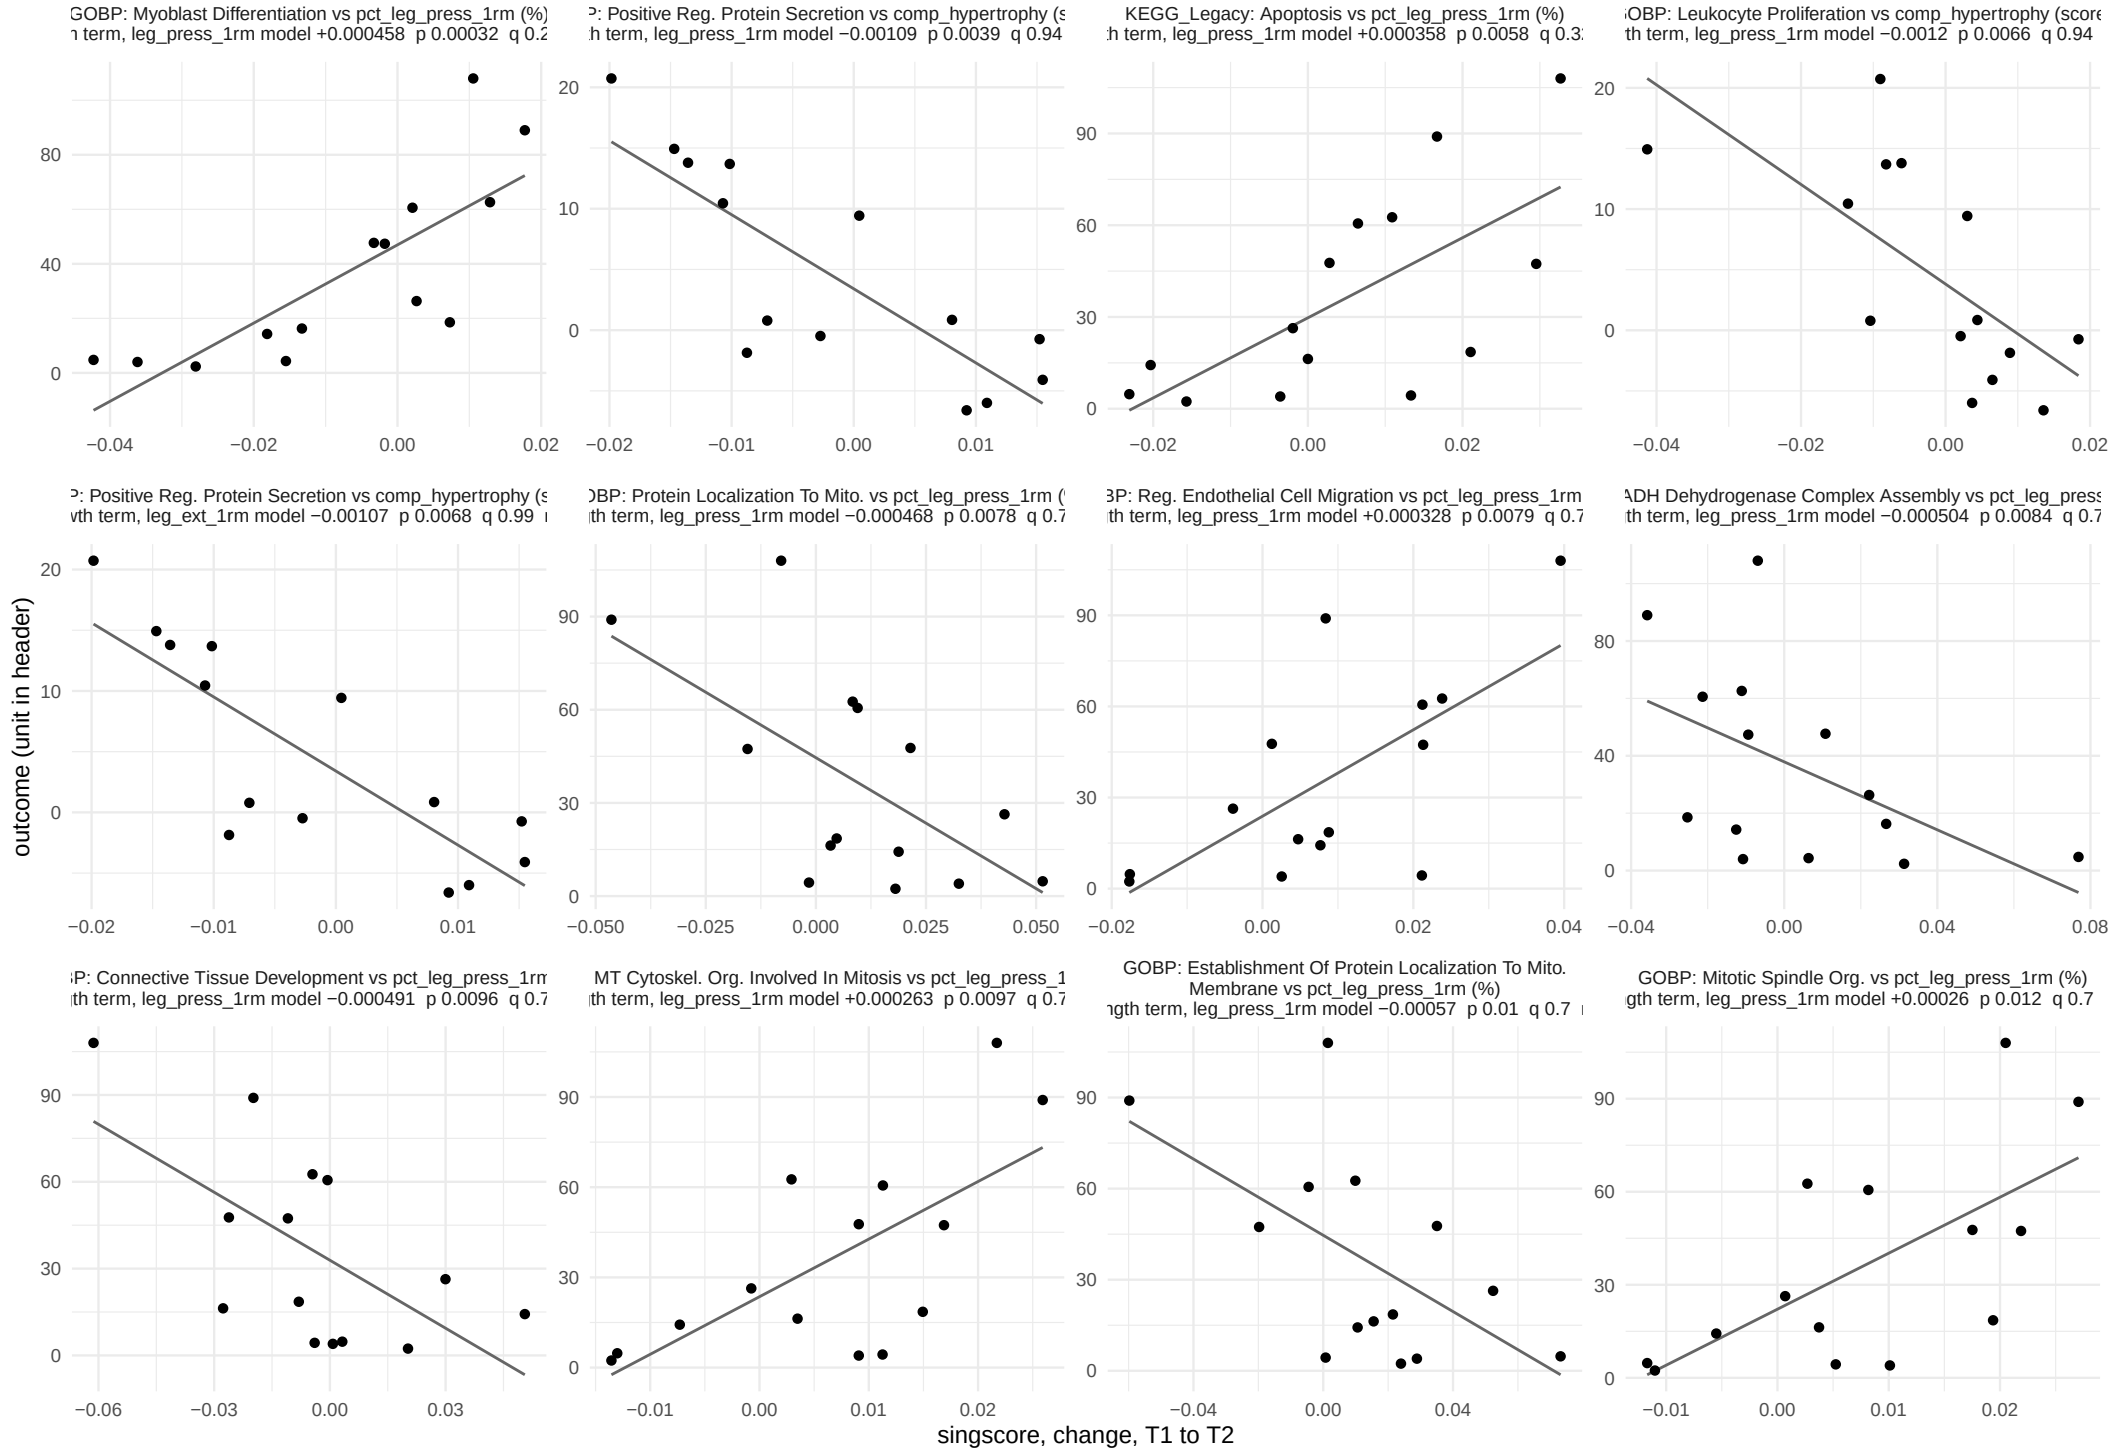

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/02_sets.xlsx, two_predictor.

Two predictor, training window


149 of 5512 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 2 of 13.

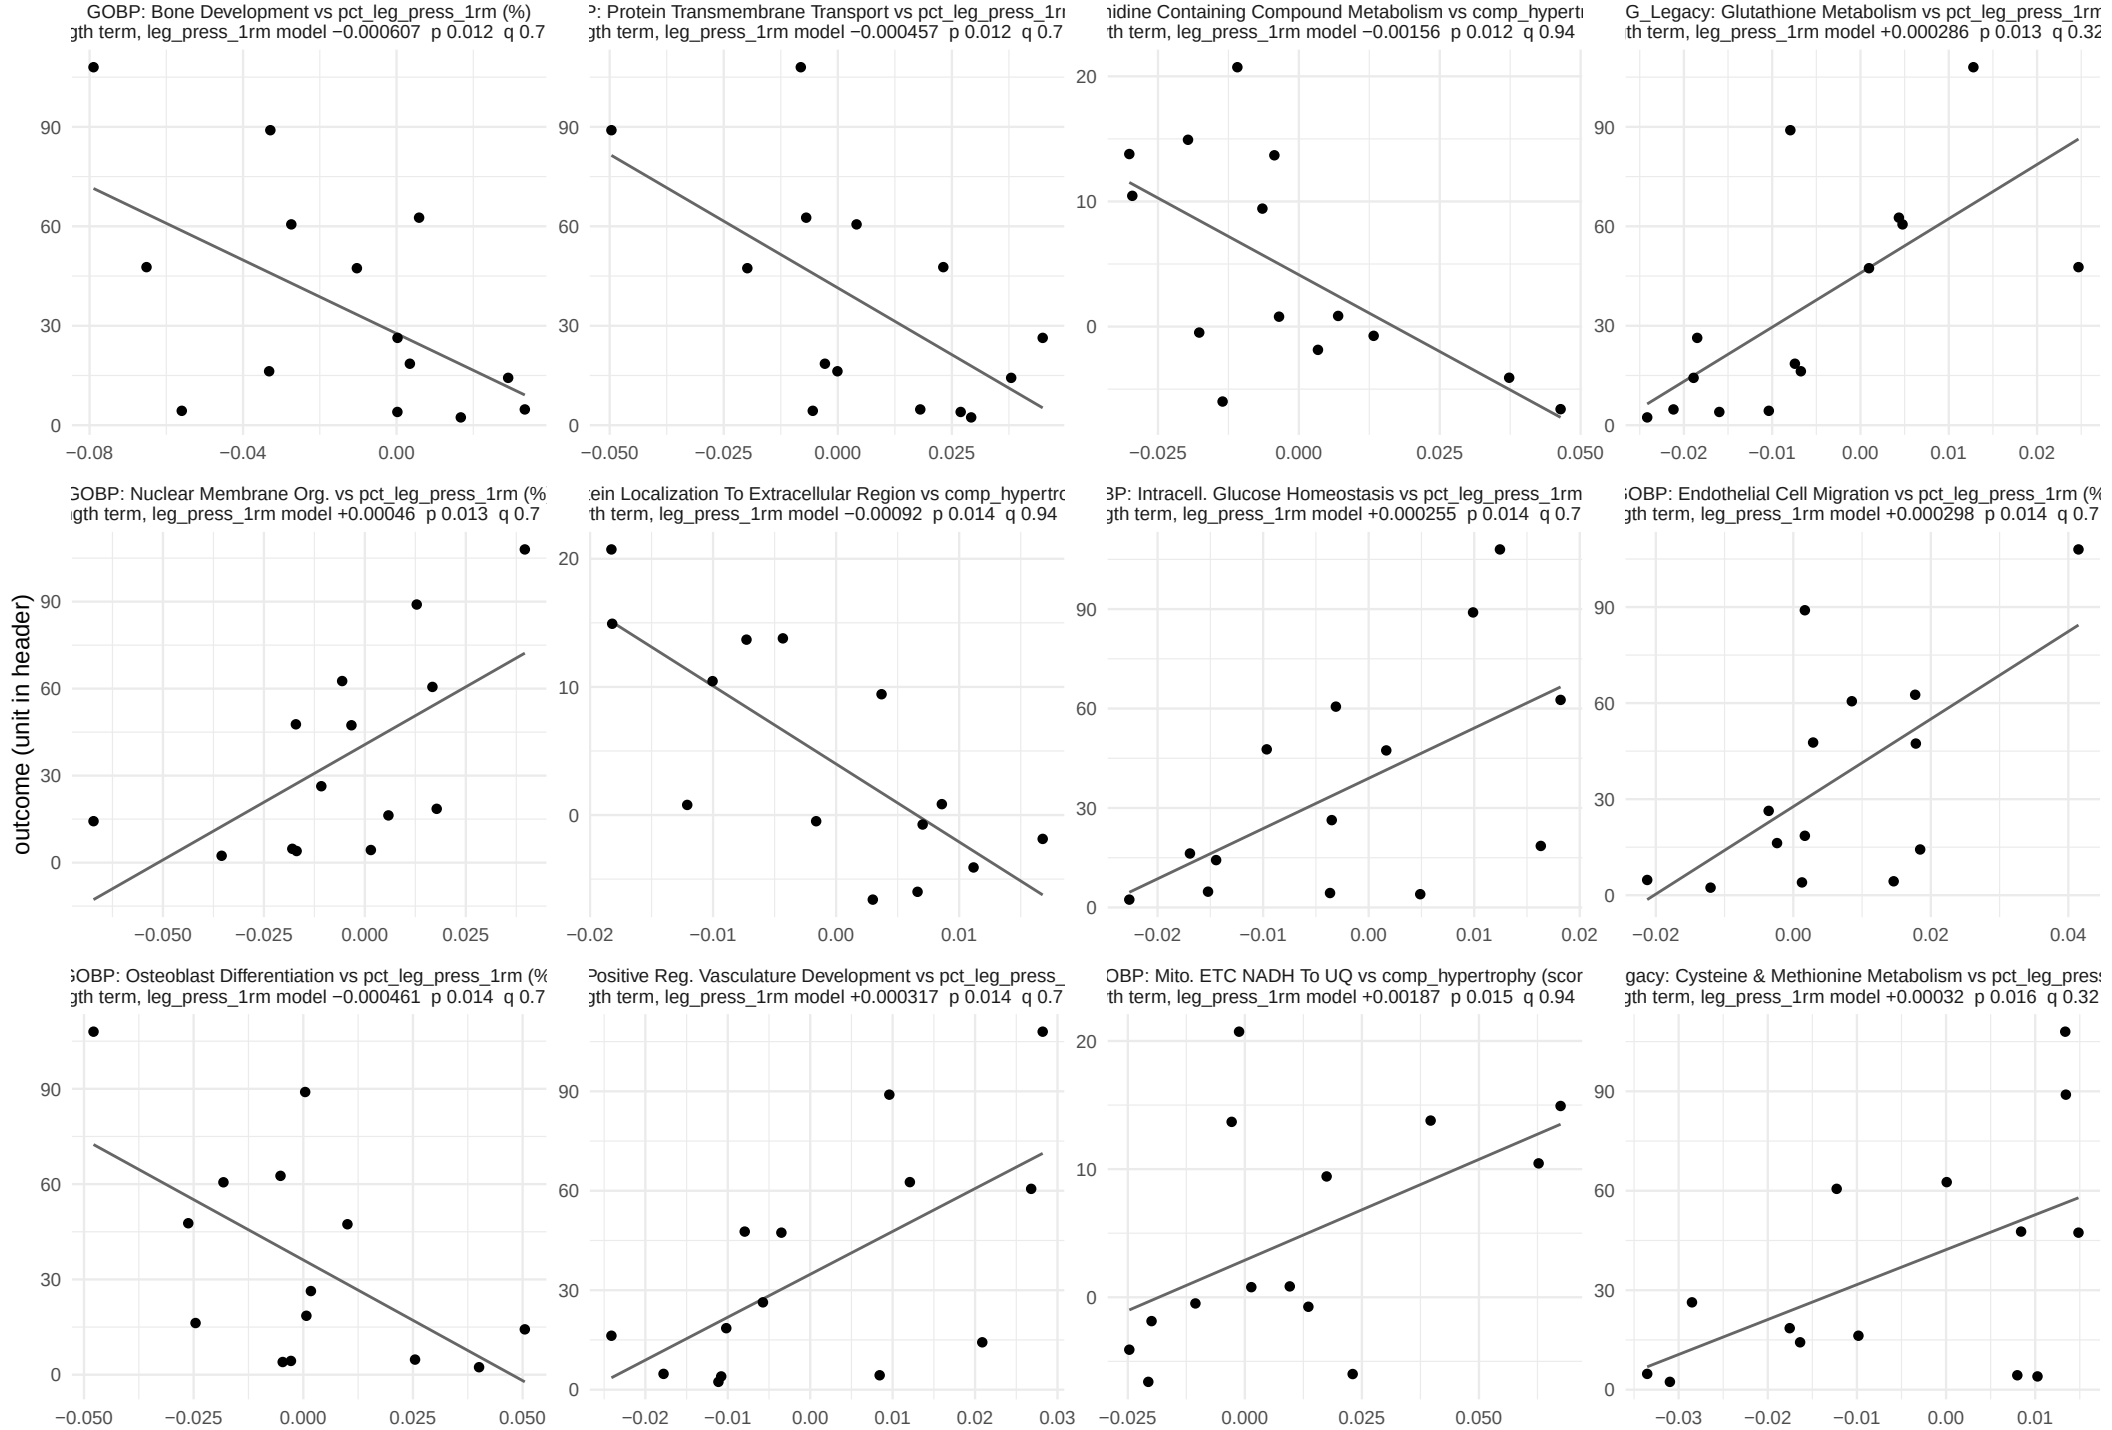

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/02_sets.xlsx, two_predictor.

Two predictor, training window


149 of 5512 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 3 of 13.

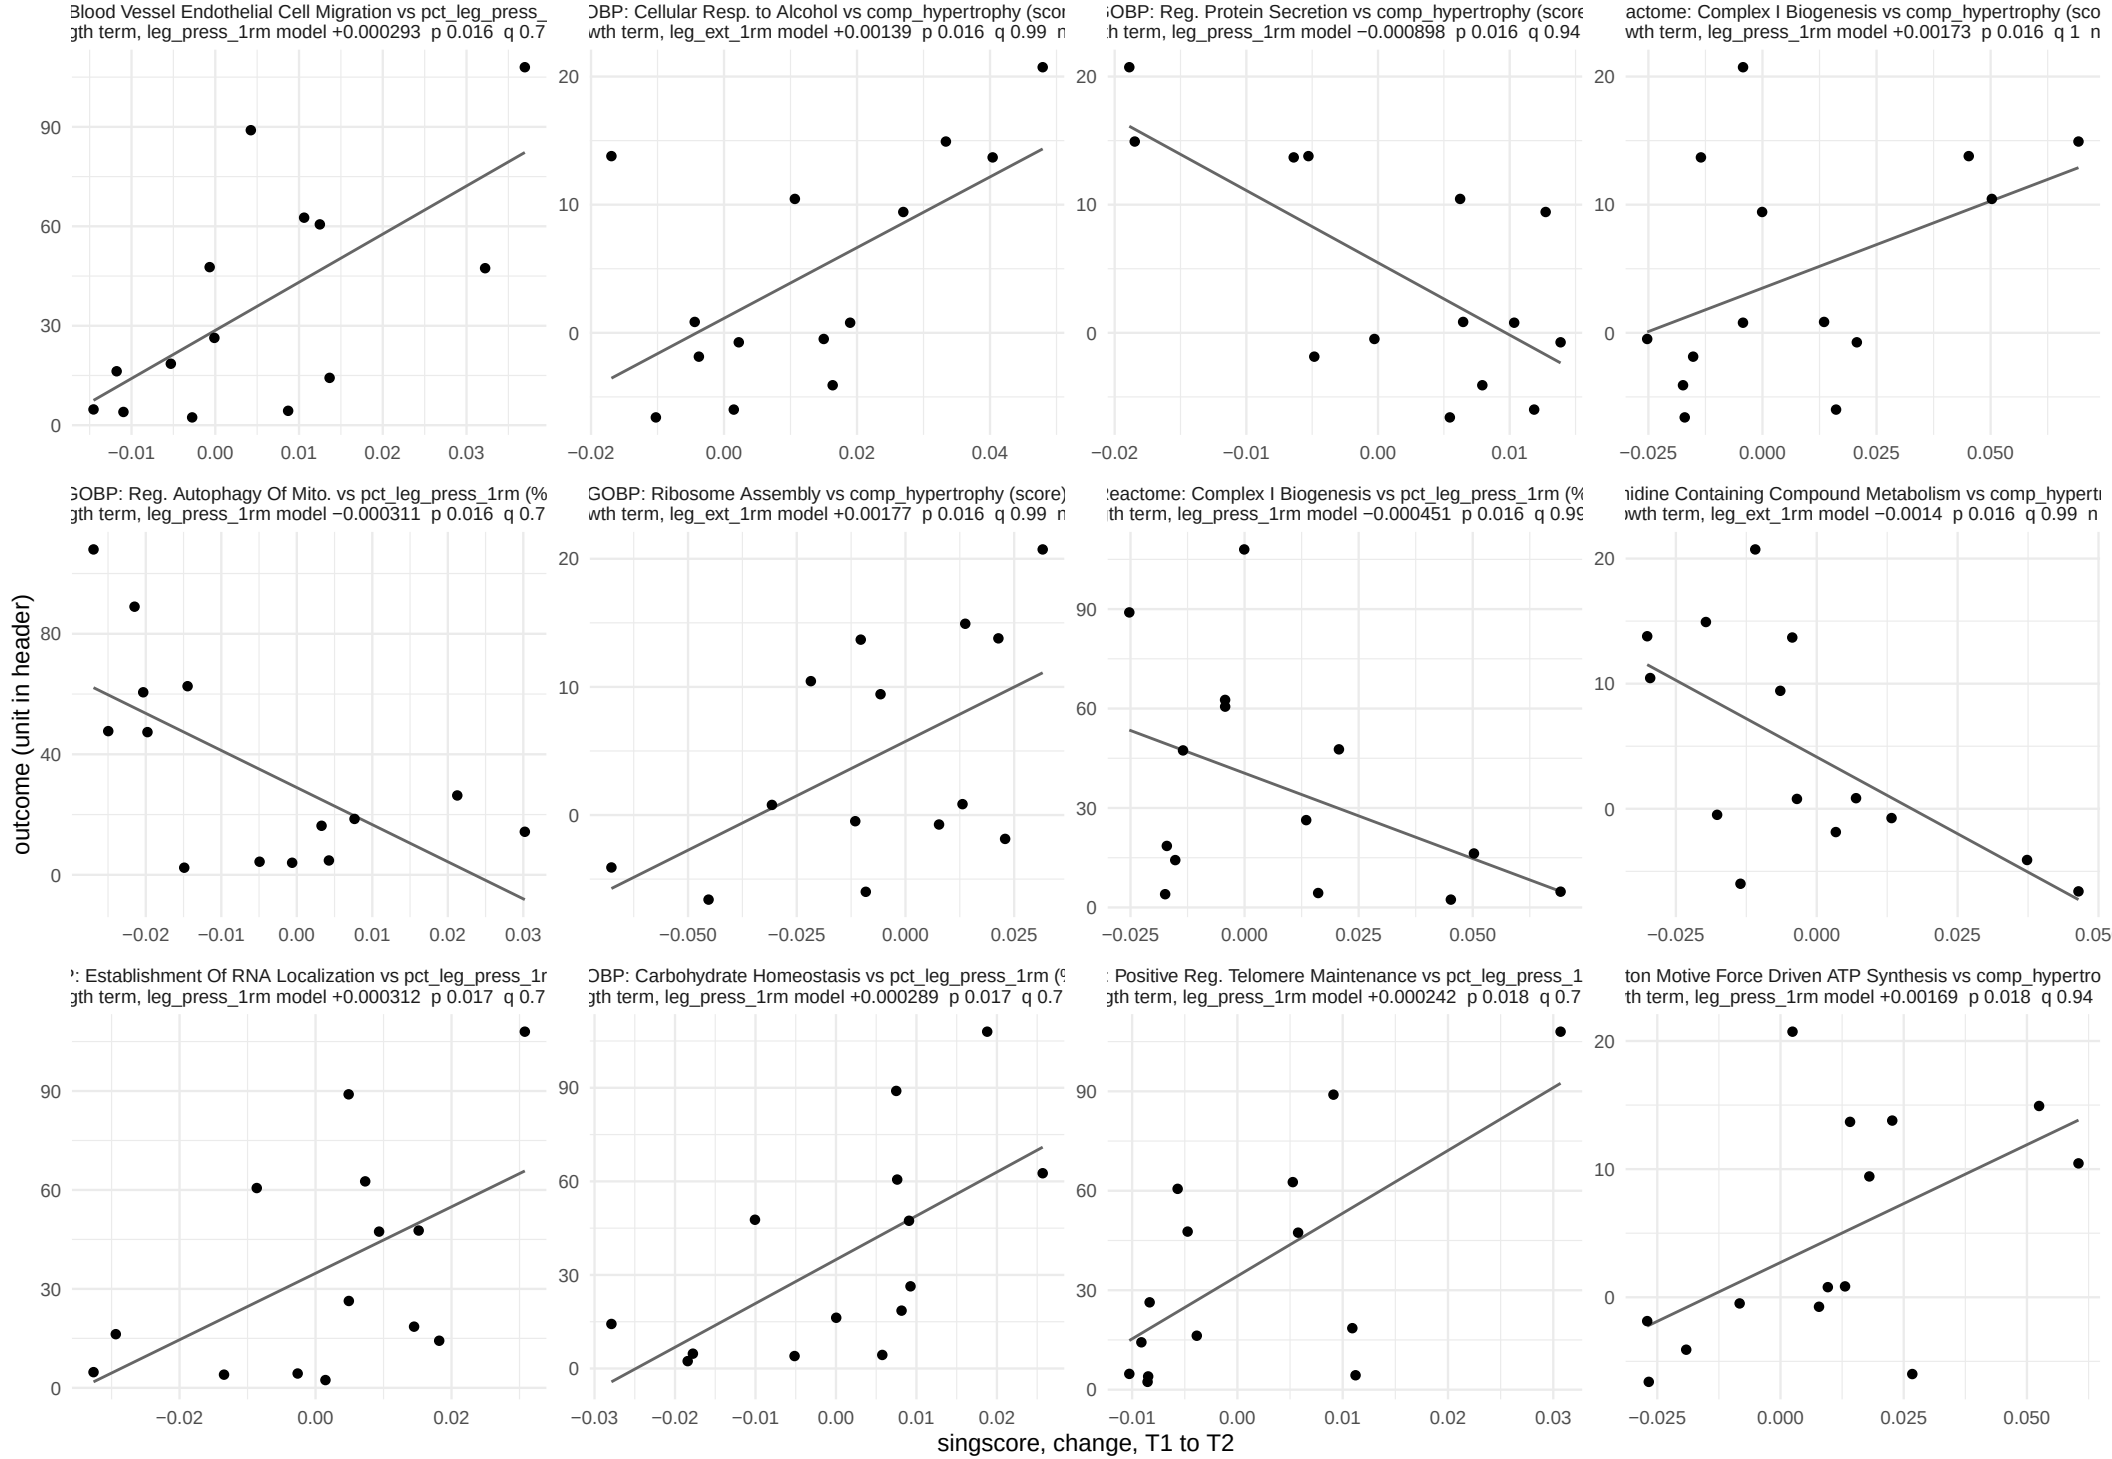

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/02_sets.xlsx, two_predictor.

Two predictor, training window


149 of 5512 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 4 of 13.

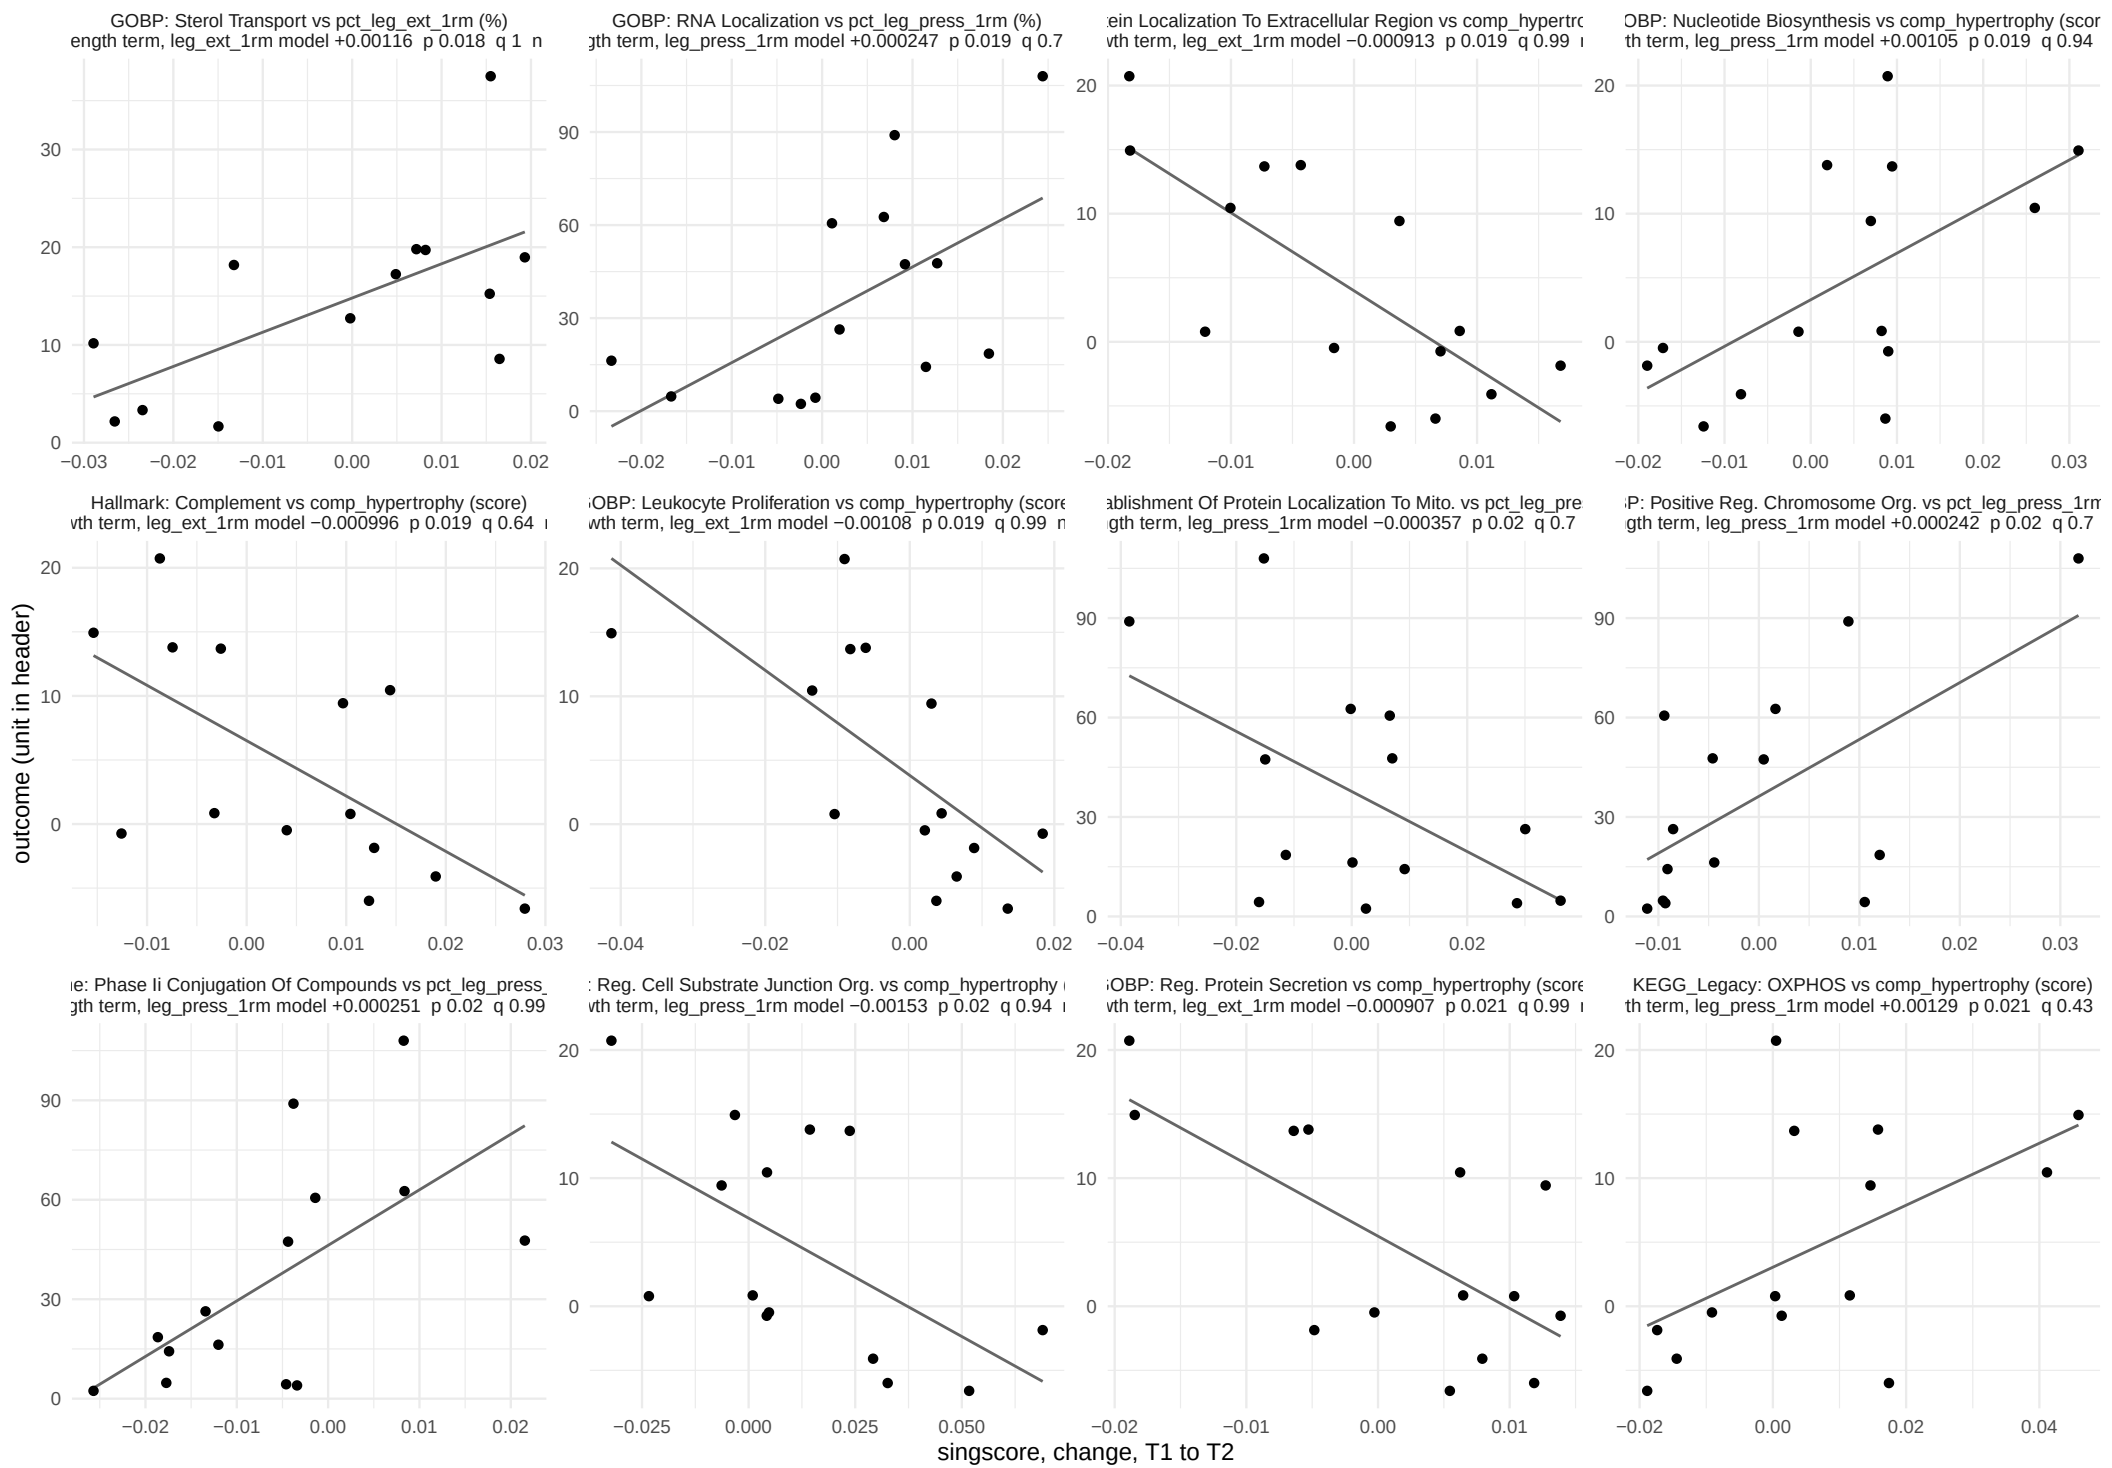

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/02_sets.xlsx, two_predictor.

Two predictor, training window


149 of 5512 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 5 of 13.

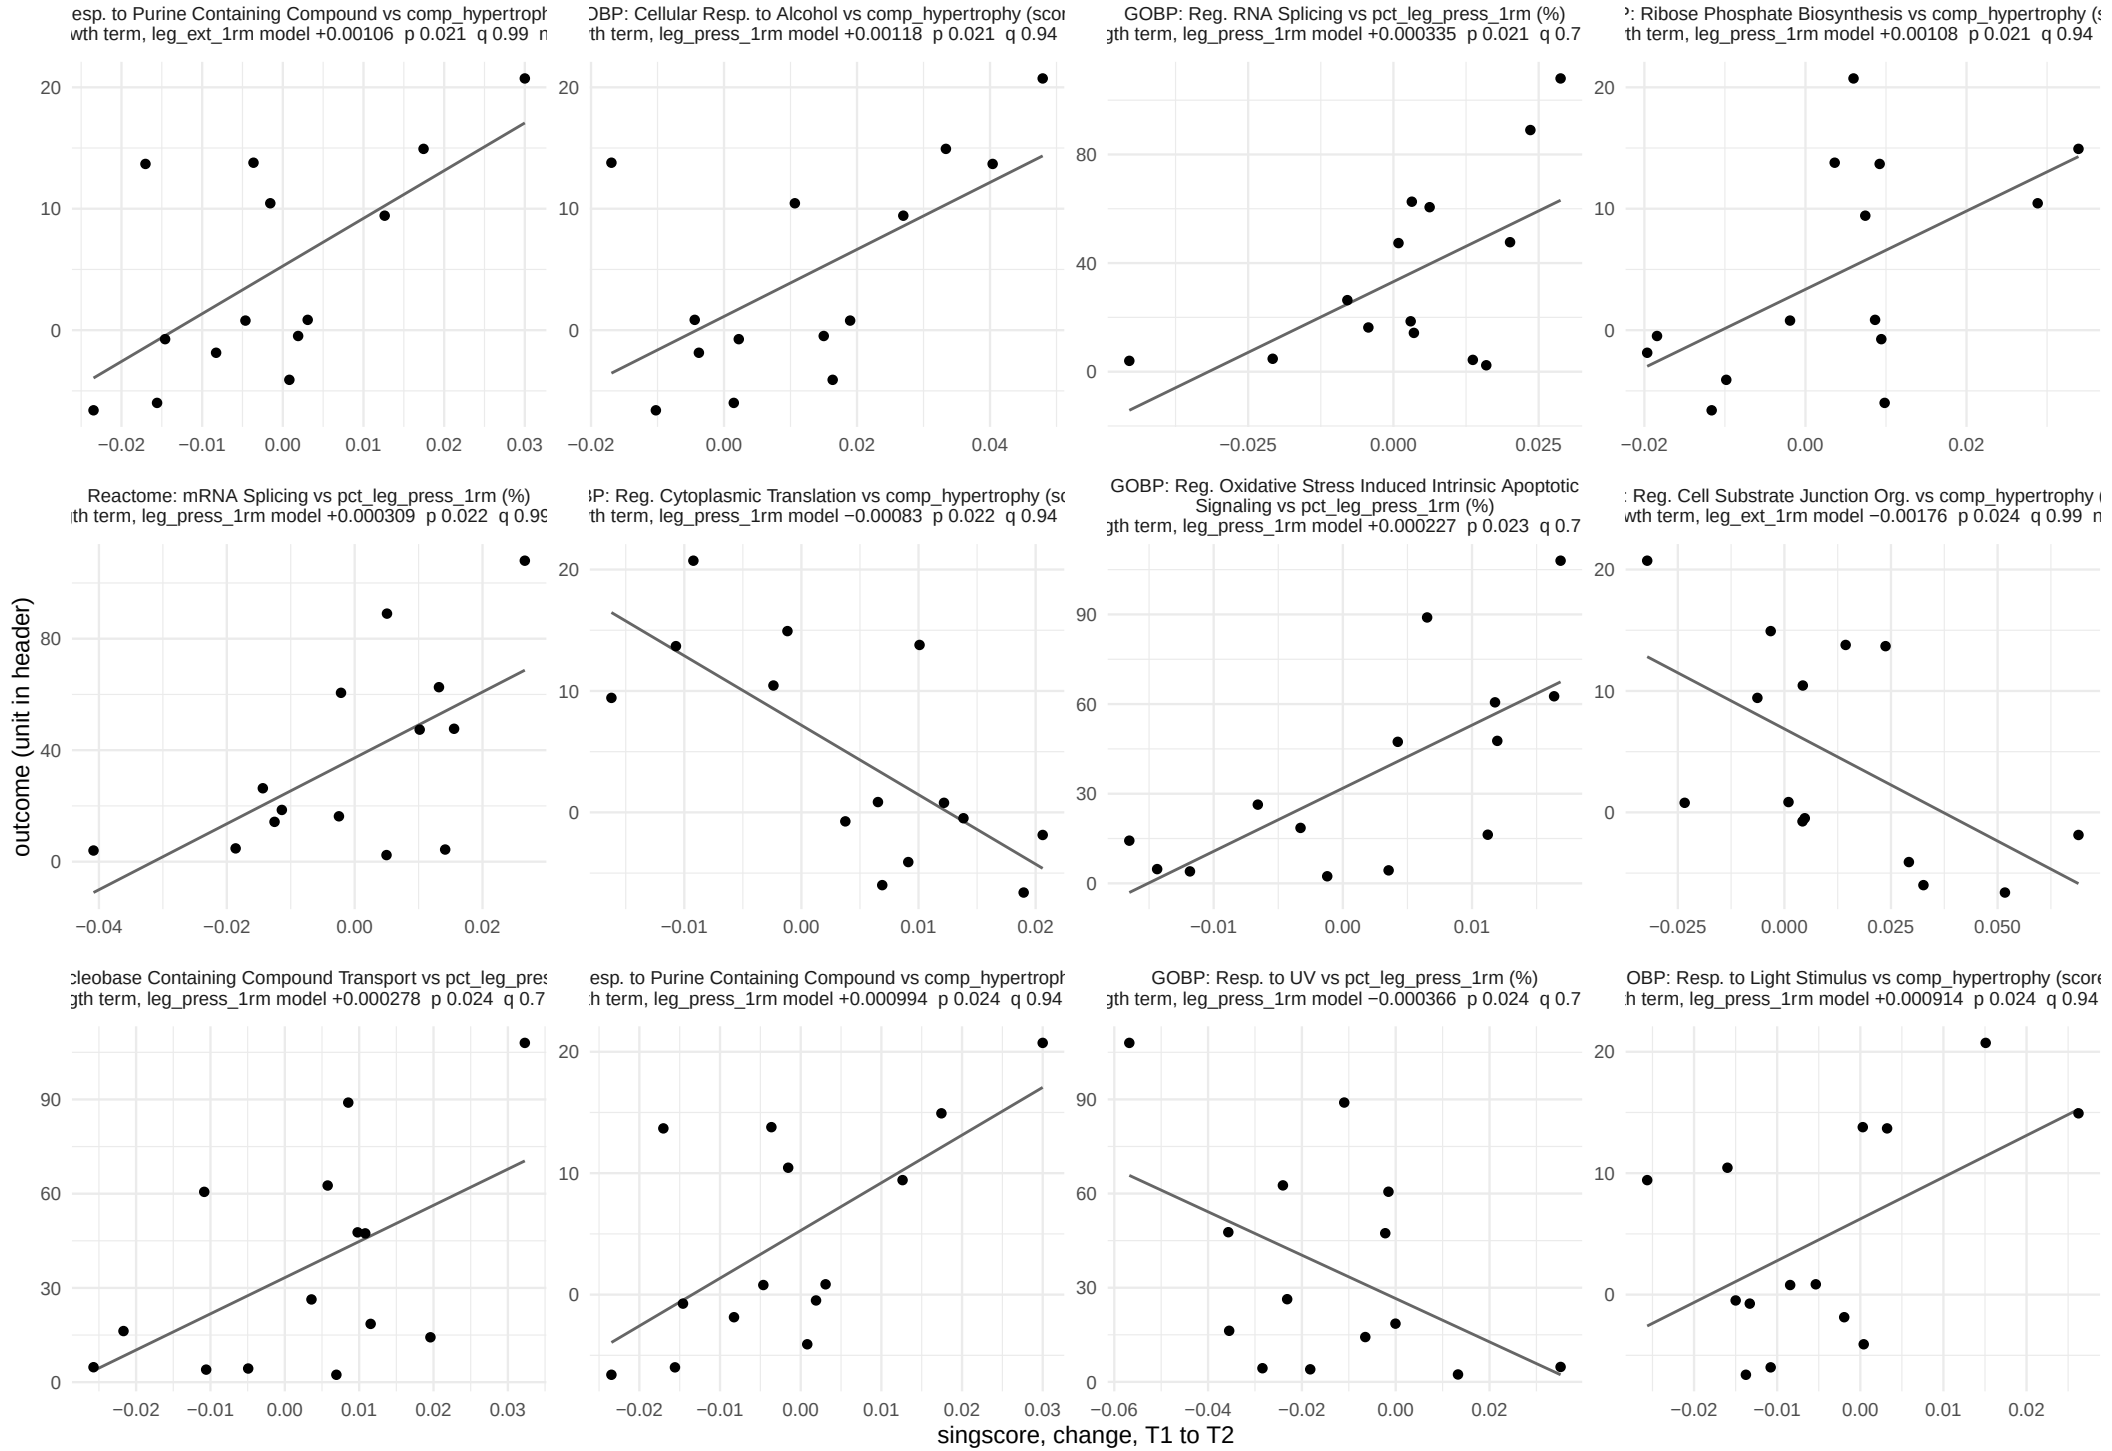

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/02_sets.xlsx, two_predictor.

Two predictor, training window


149 of 5512 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 6 of 13.

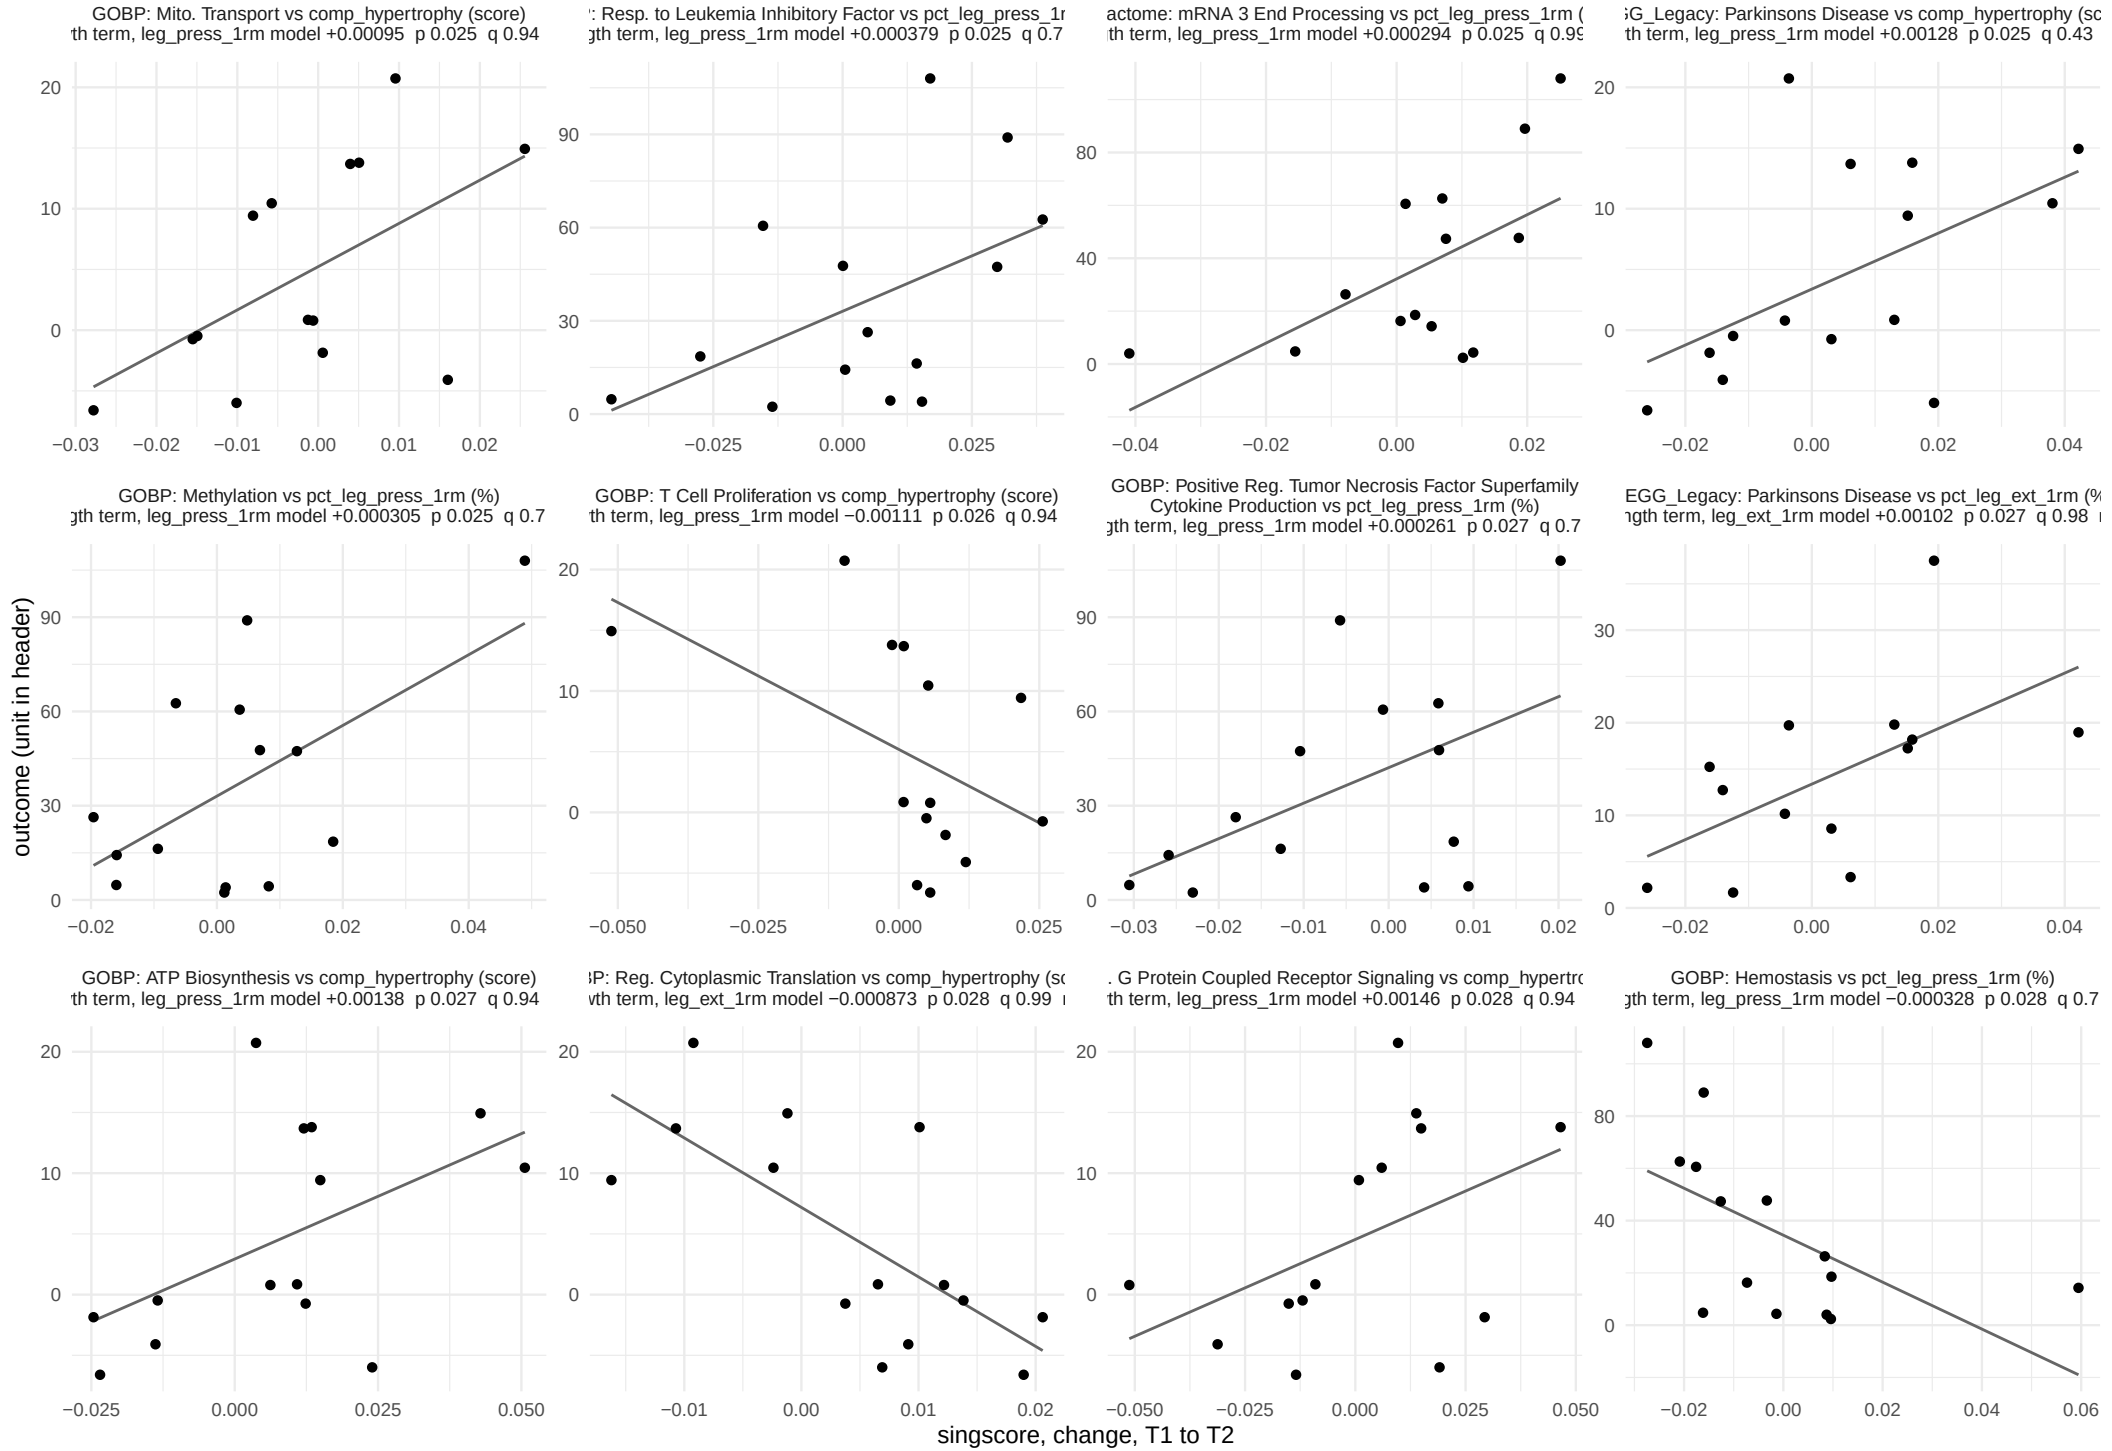

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/02_sets.xlsx, two_predictor.

Two predictor, training window


149 of 5512 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 7 of 13.

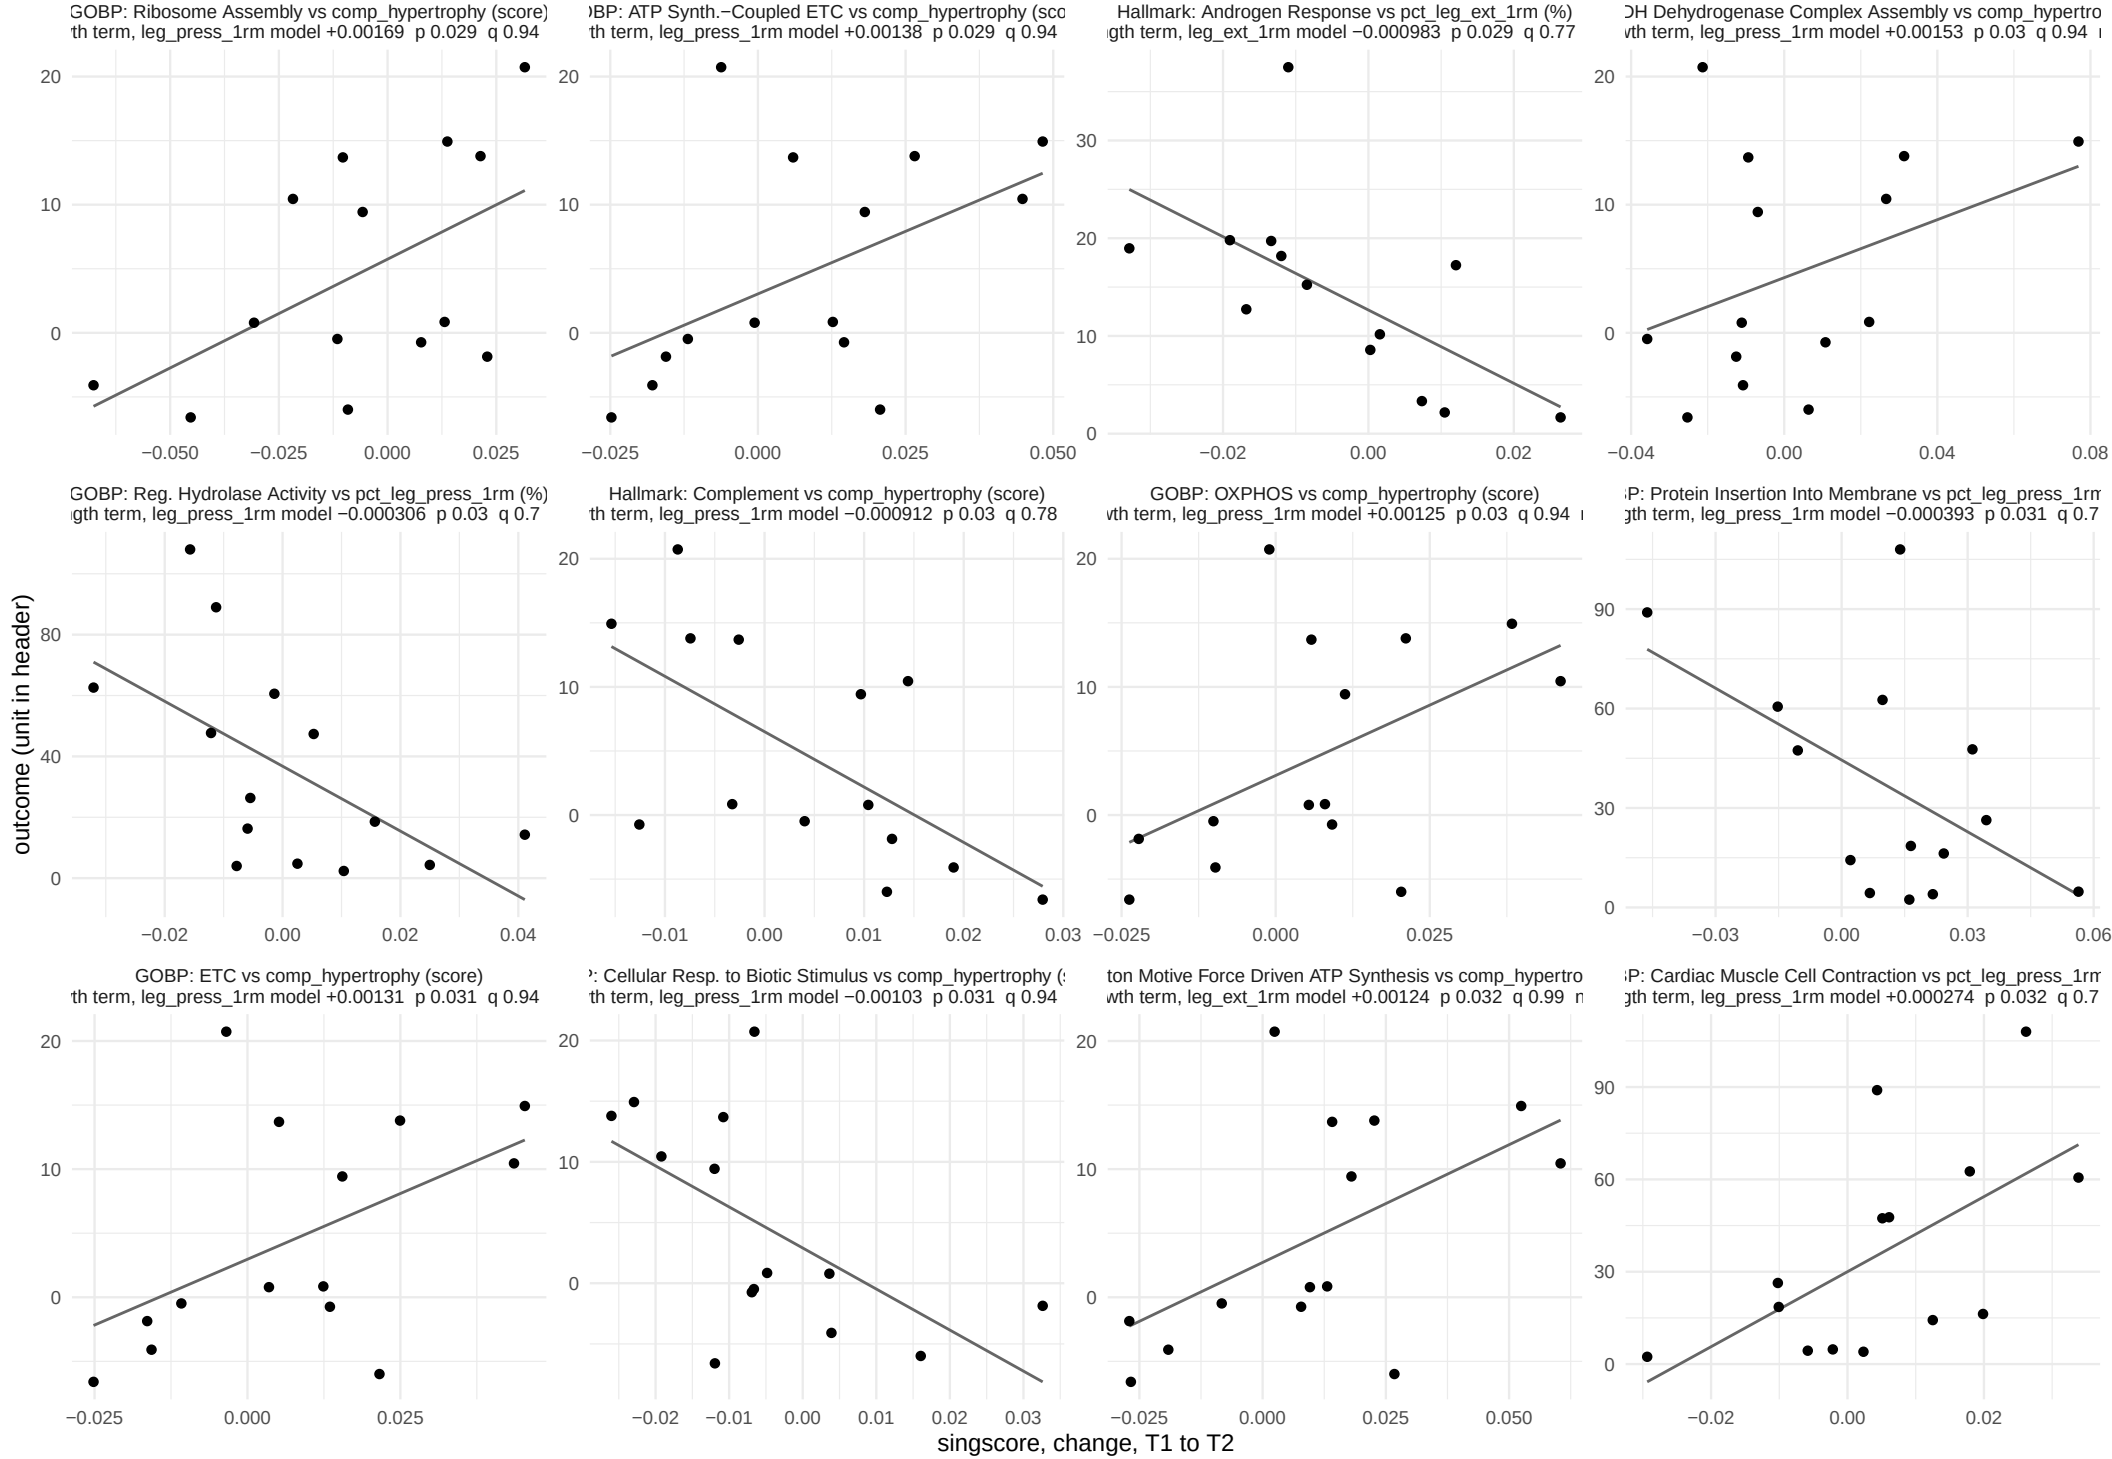

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/02_sets.xlsx, two_predictor.

Two predictor, training window


149 of 5512 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 8 of 13.

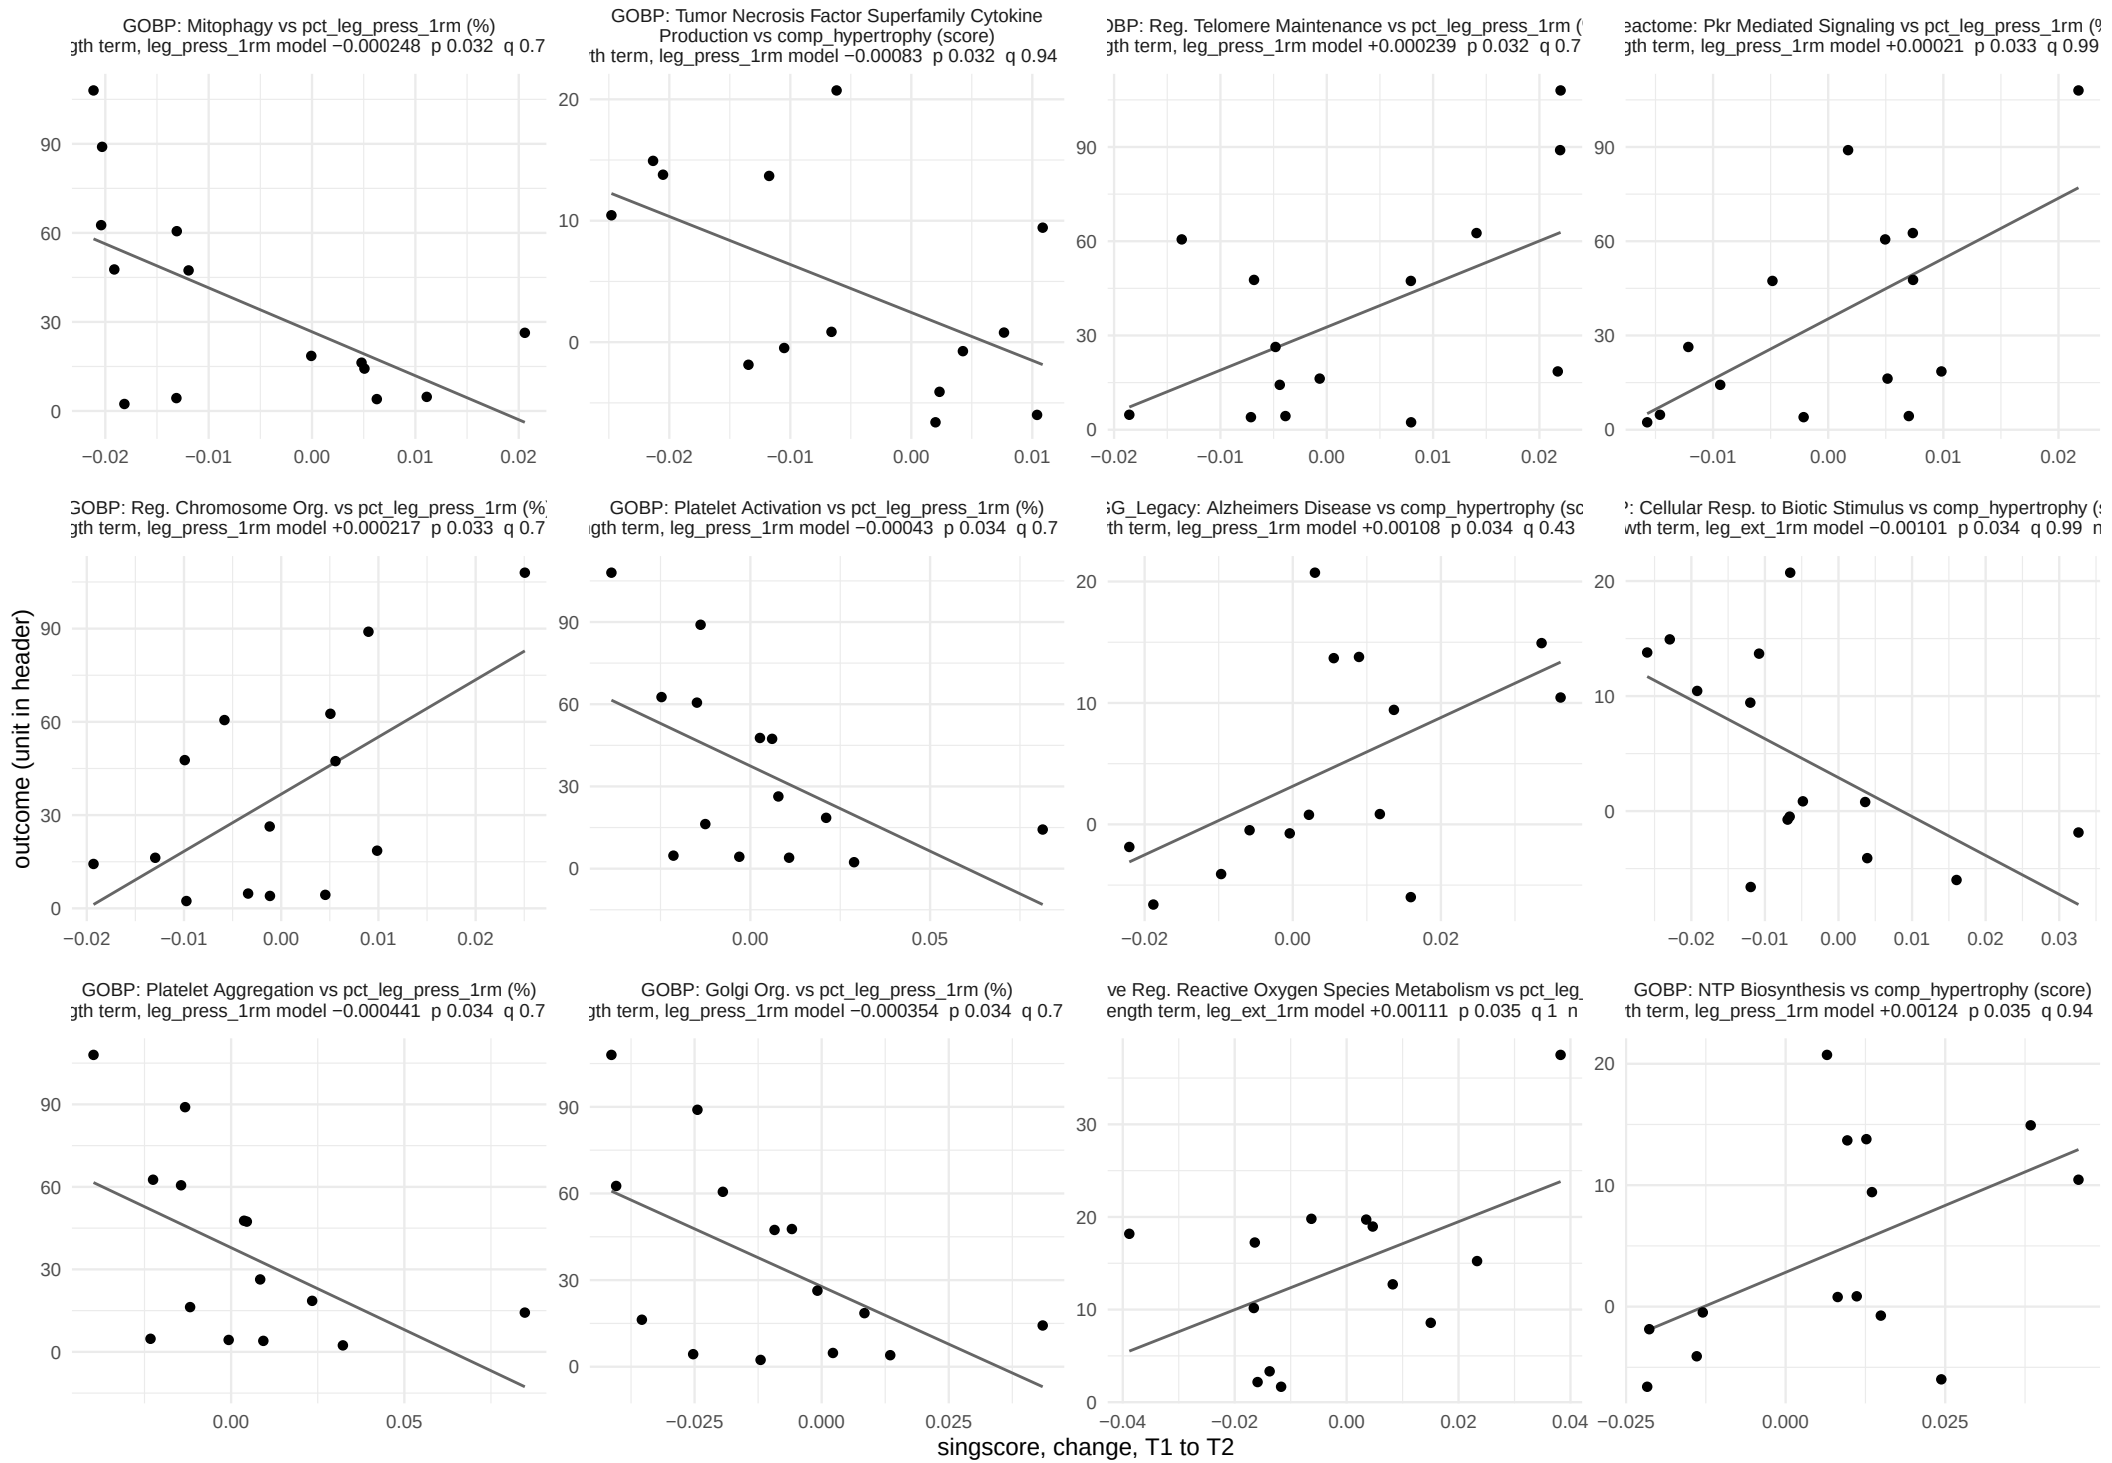

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/02_sets.xlsx, two_predictor.

Two predictor, training window


149 of 5512 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 9 of 13.

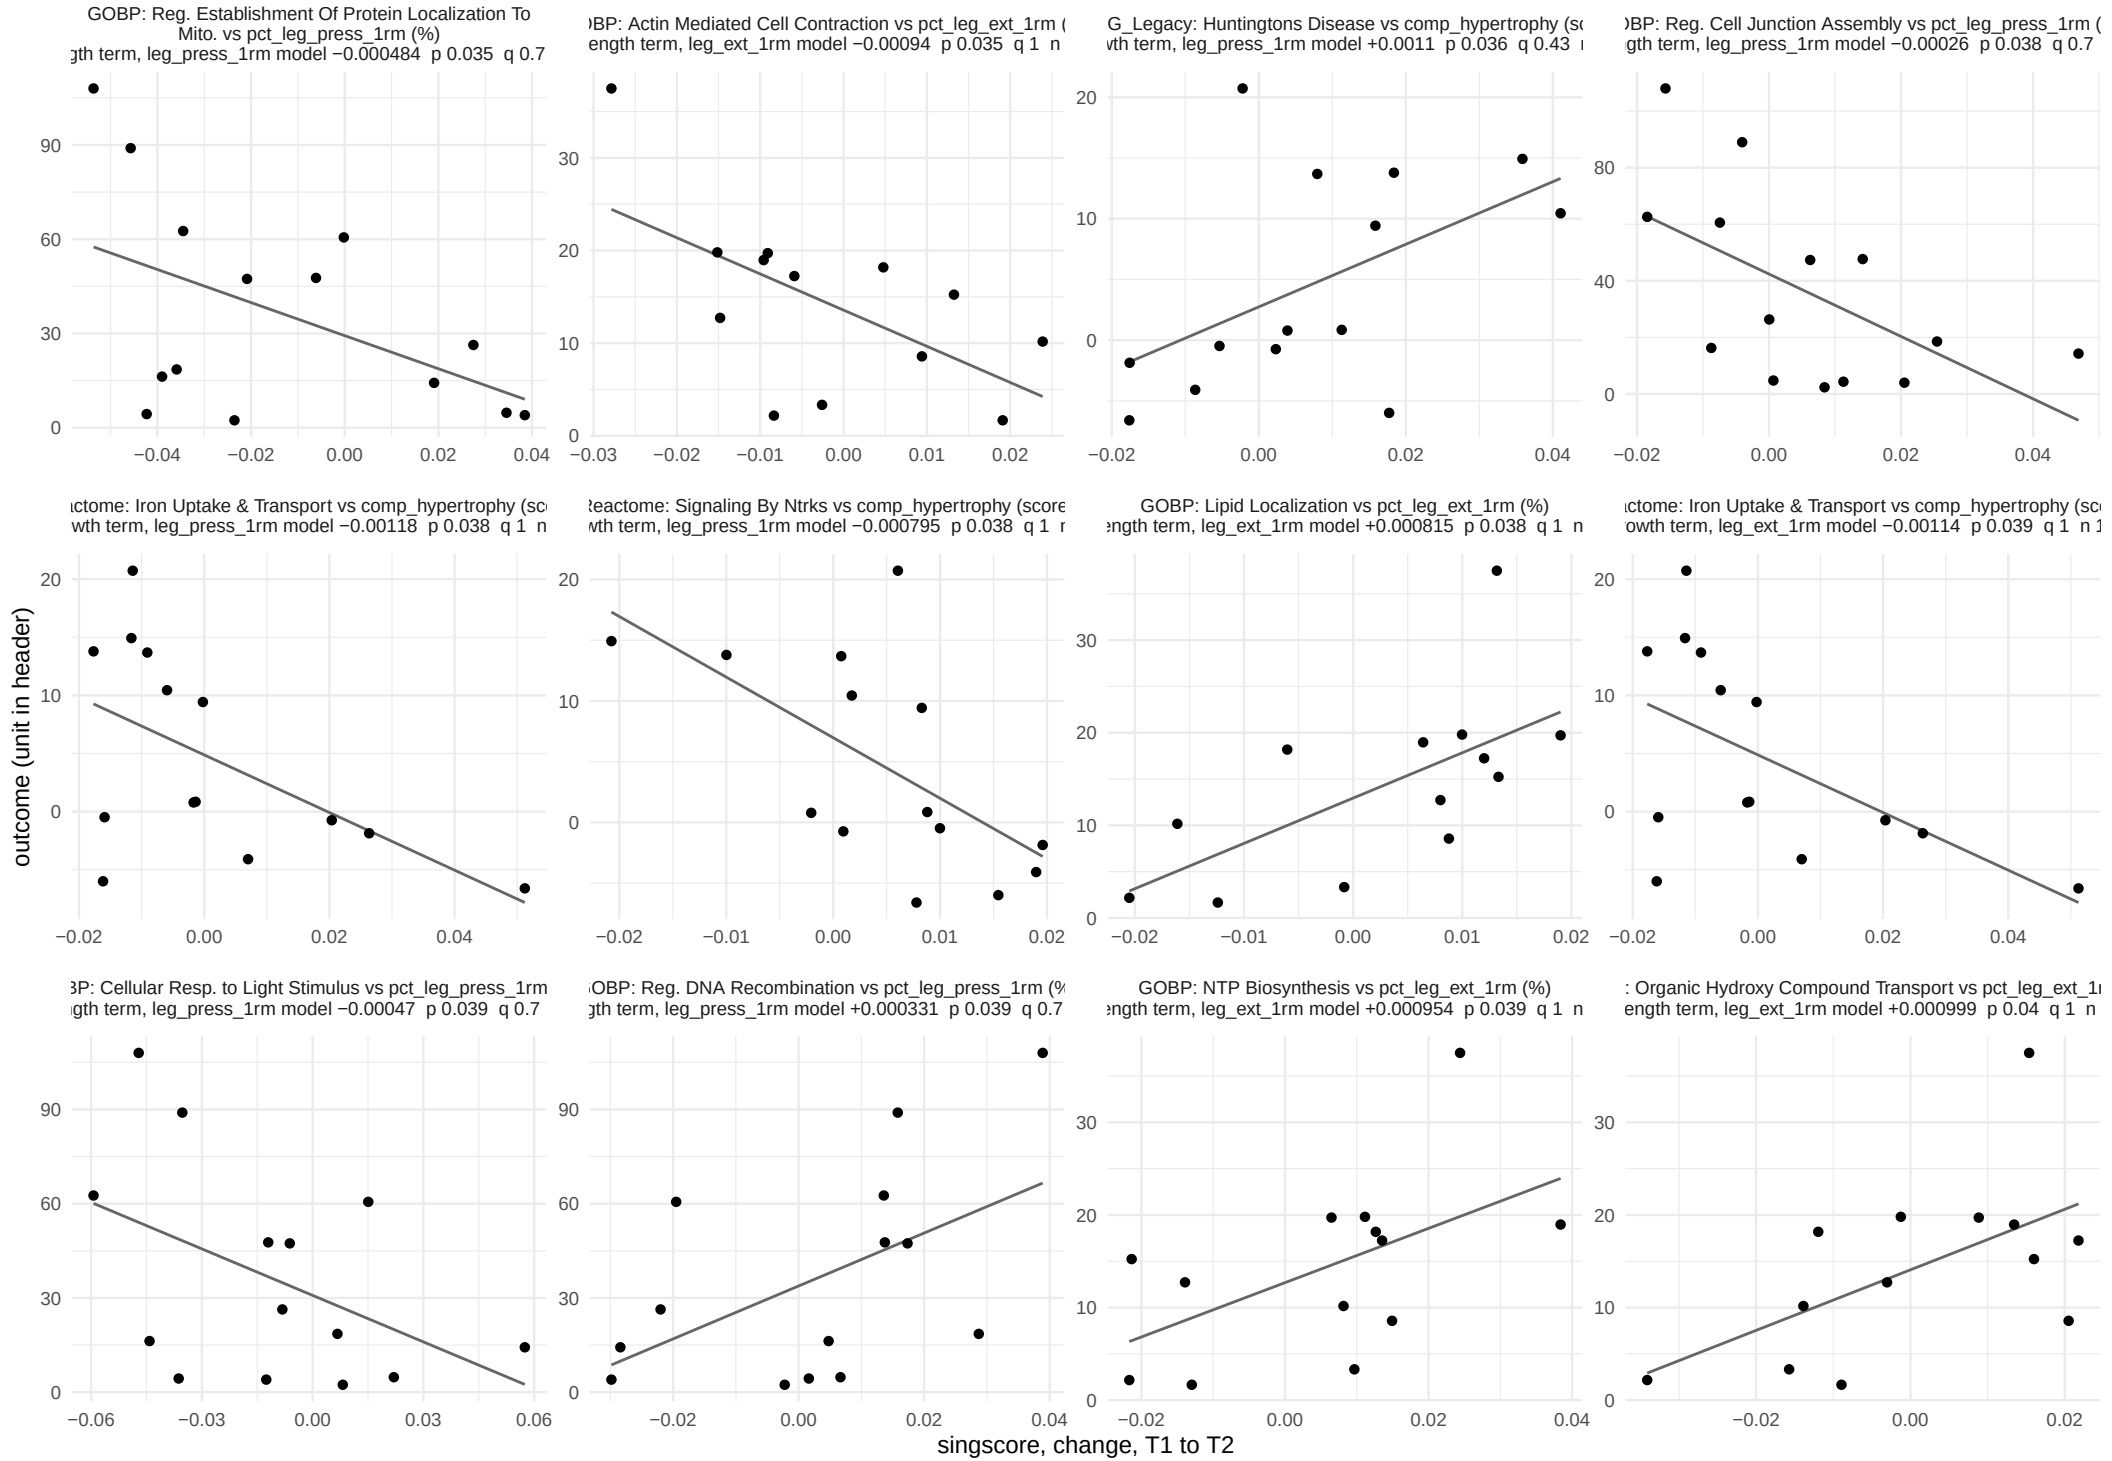

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/02_sets.xlsx, two_predictor.

Two predictor, training window


149 of 5512 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 10 of 13.

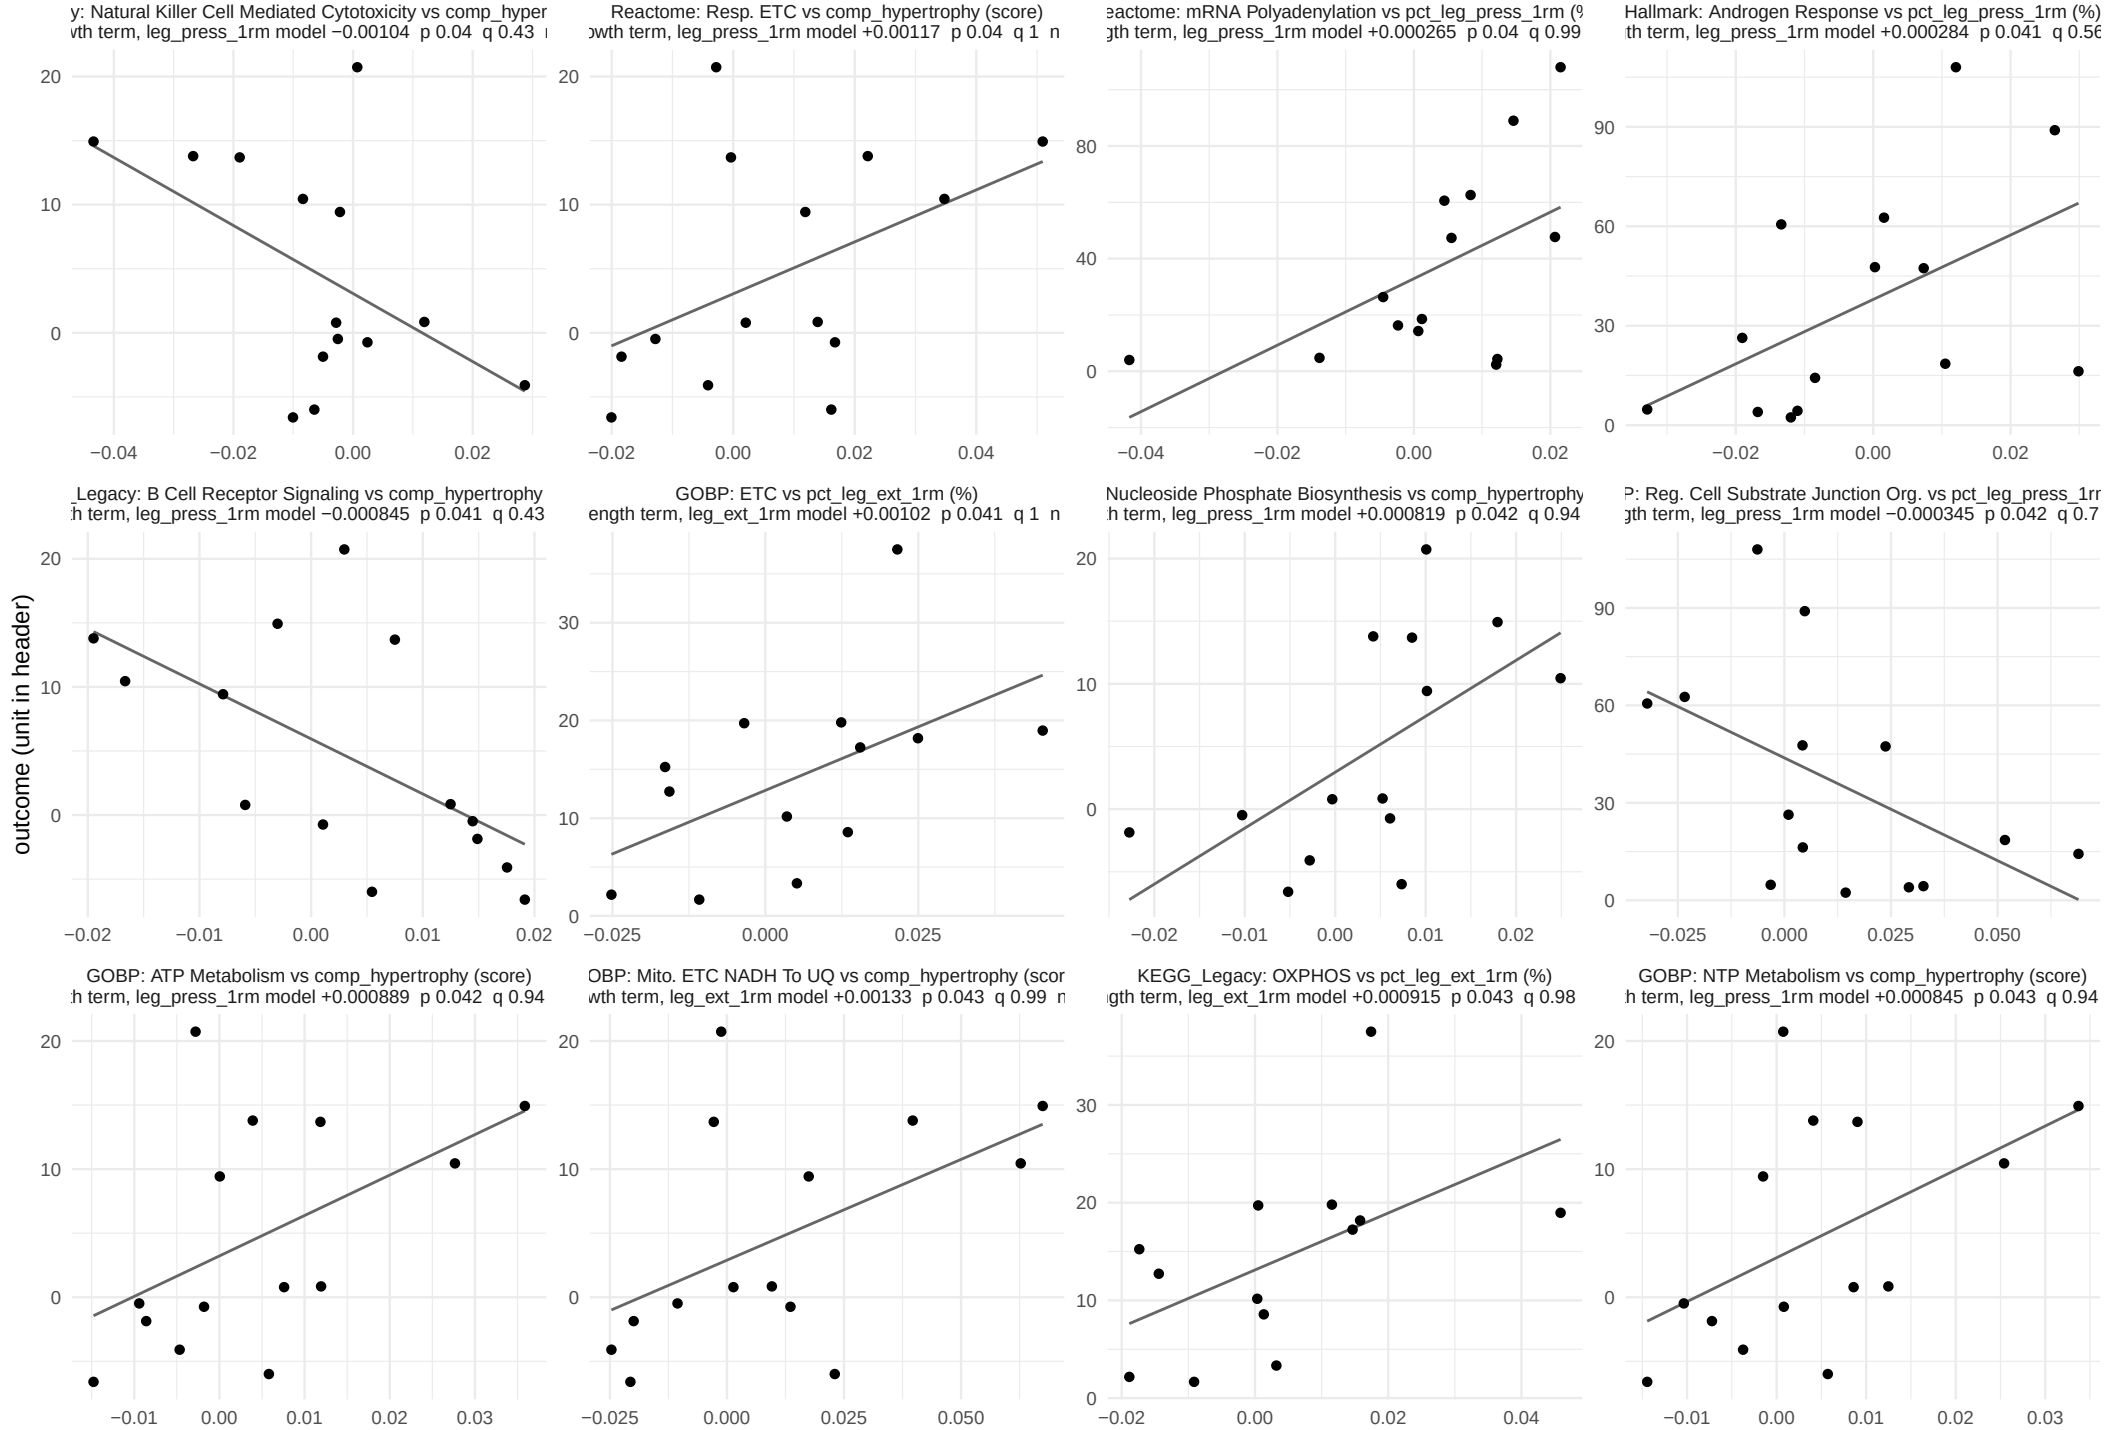

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/02_sets.xlsx, two_predictor.

Two predictor, training window


149 of 5512 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 11 of 13.

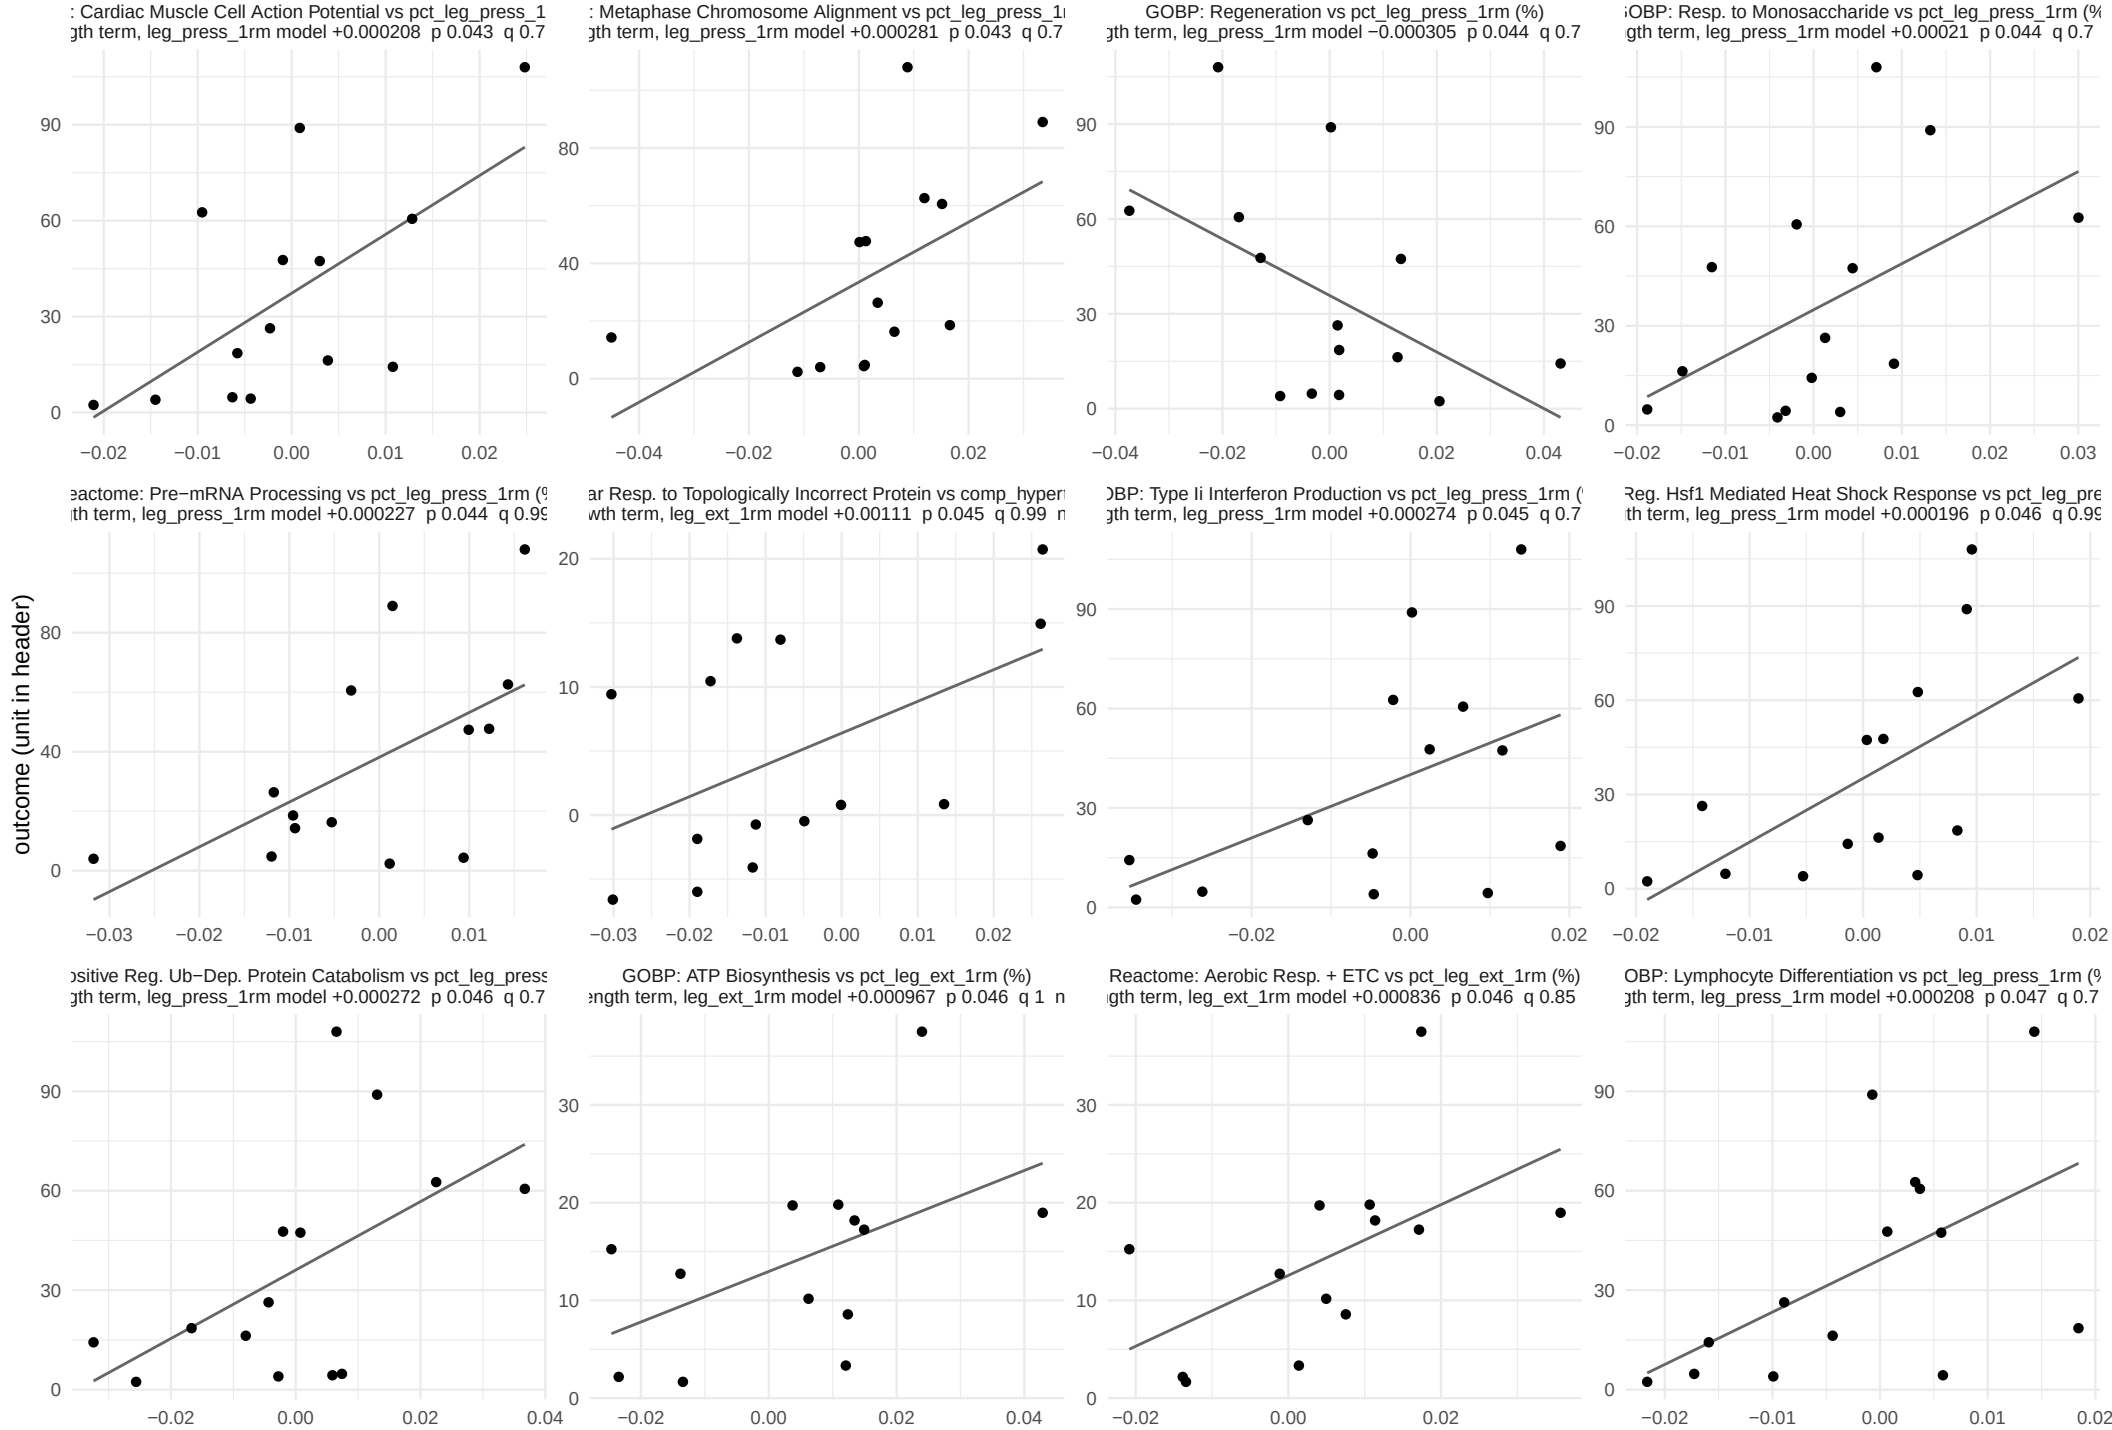

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/02_sets.xlsx, two_predictor.

Two predictor, training window


149 of 5512 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 12 of 13.

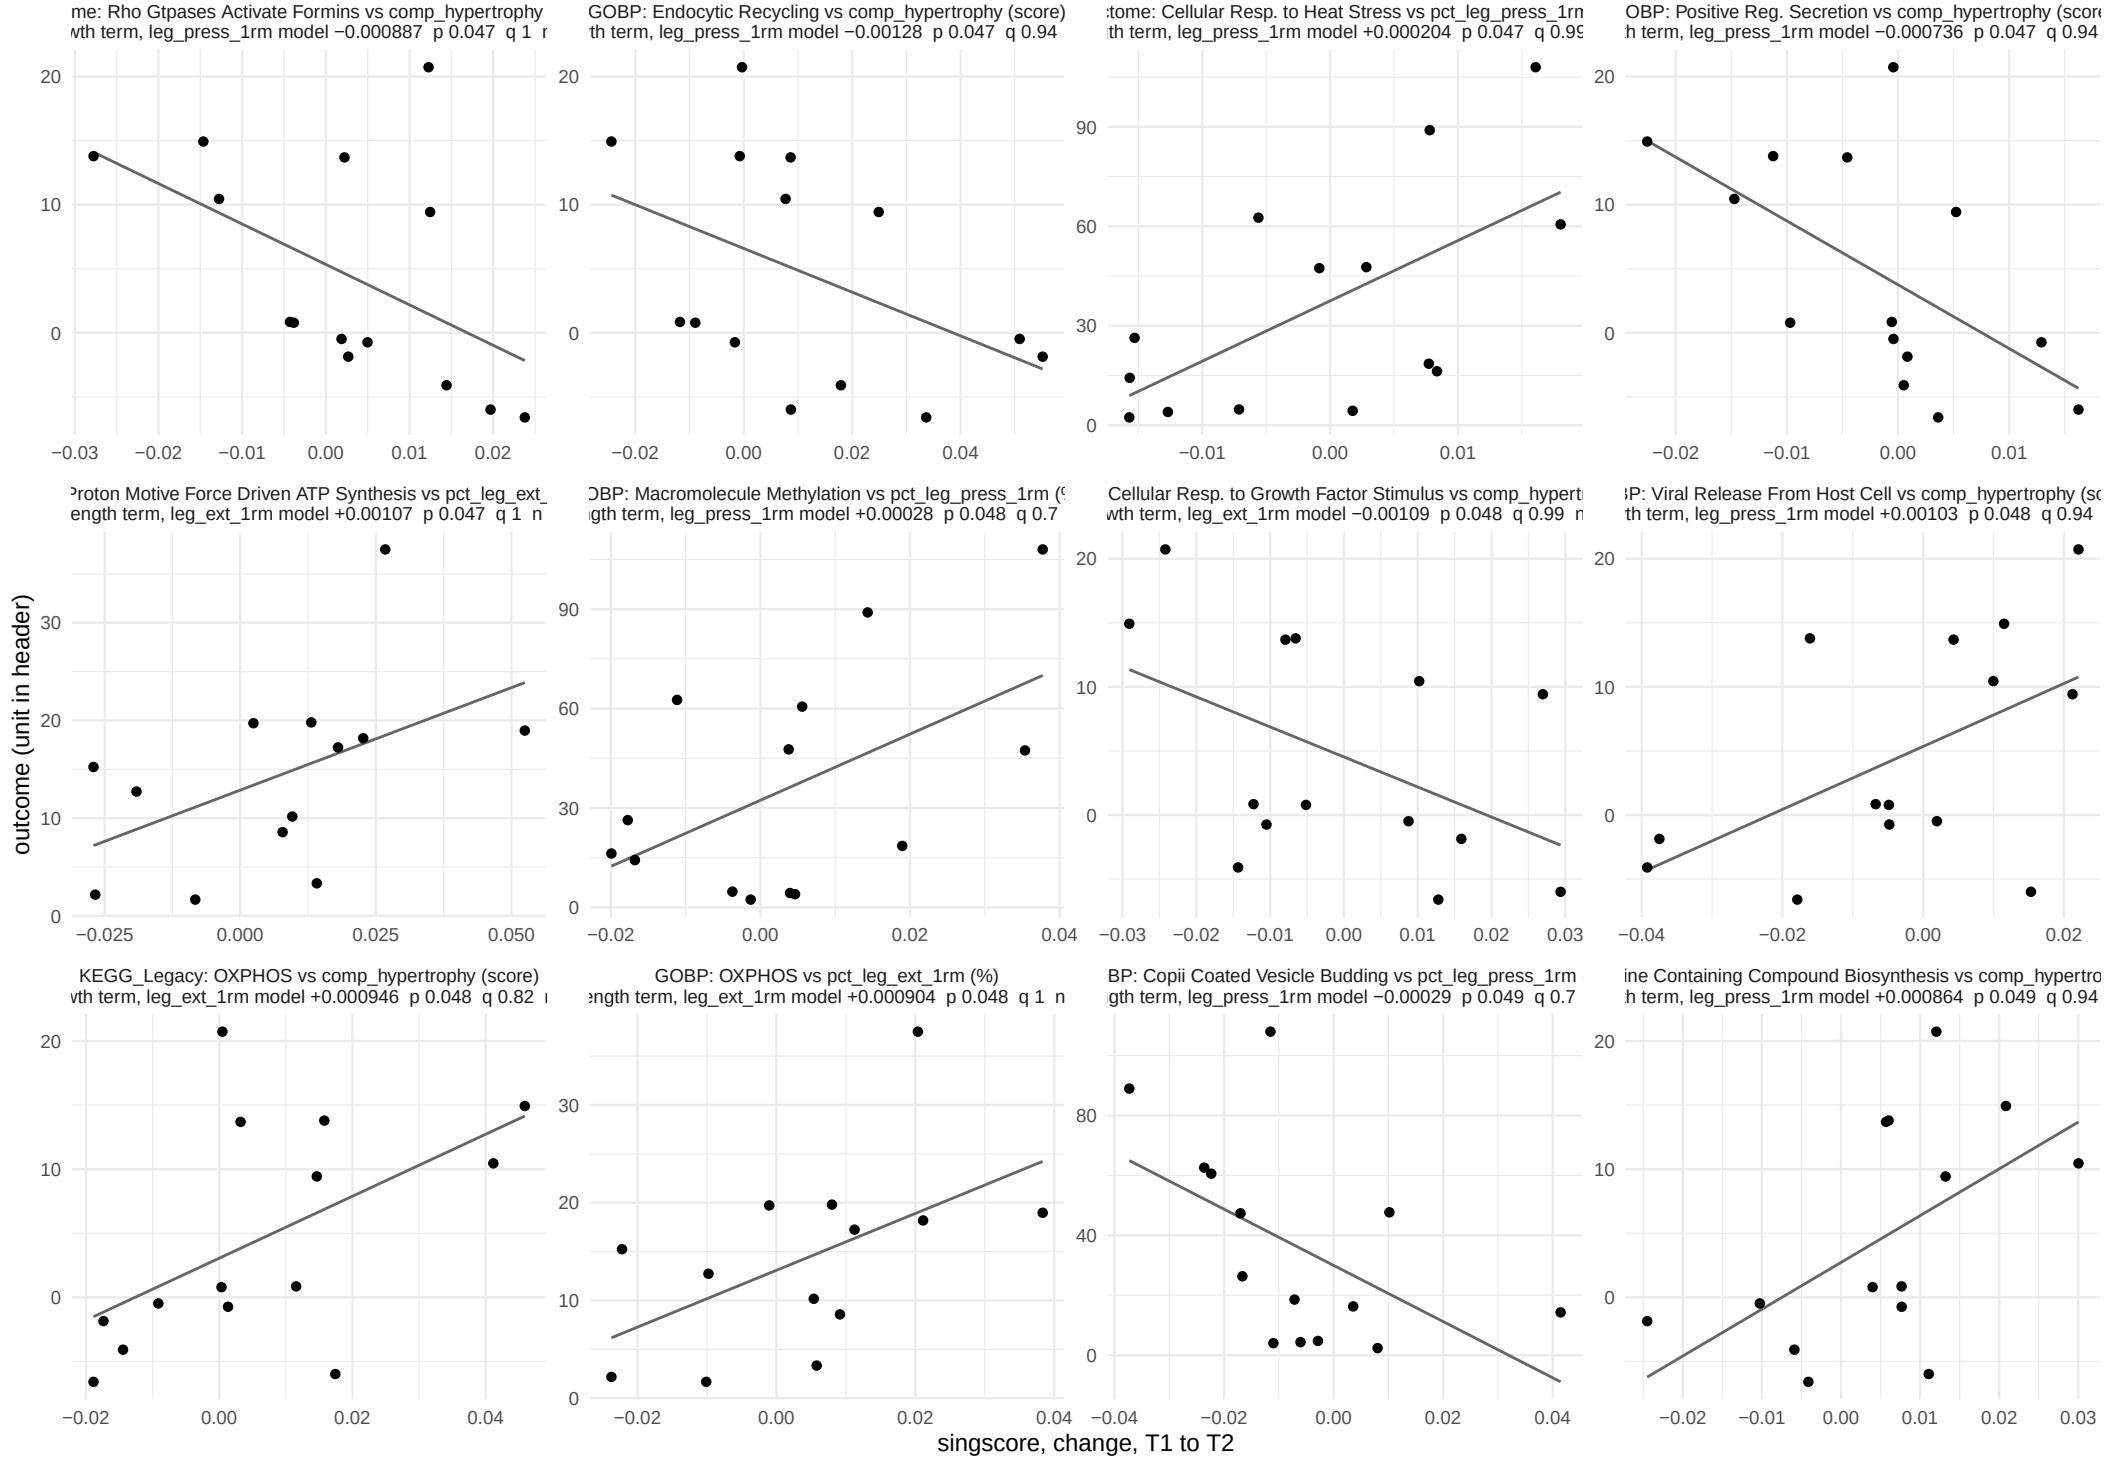

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/02_sets.xlsx, two_predictor.

Two predictor, training window


149 of 5512 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 13 of 13.

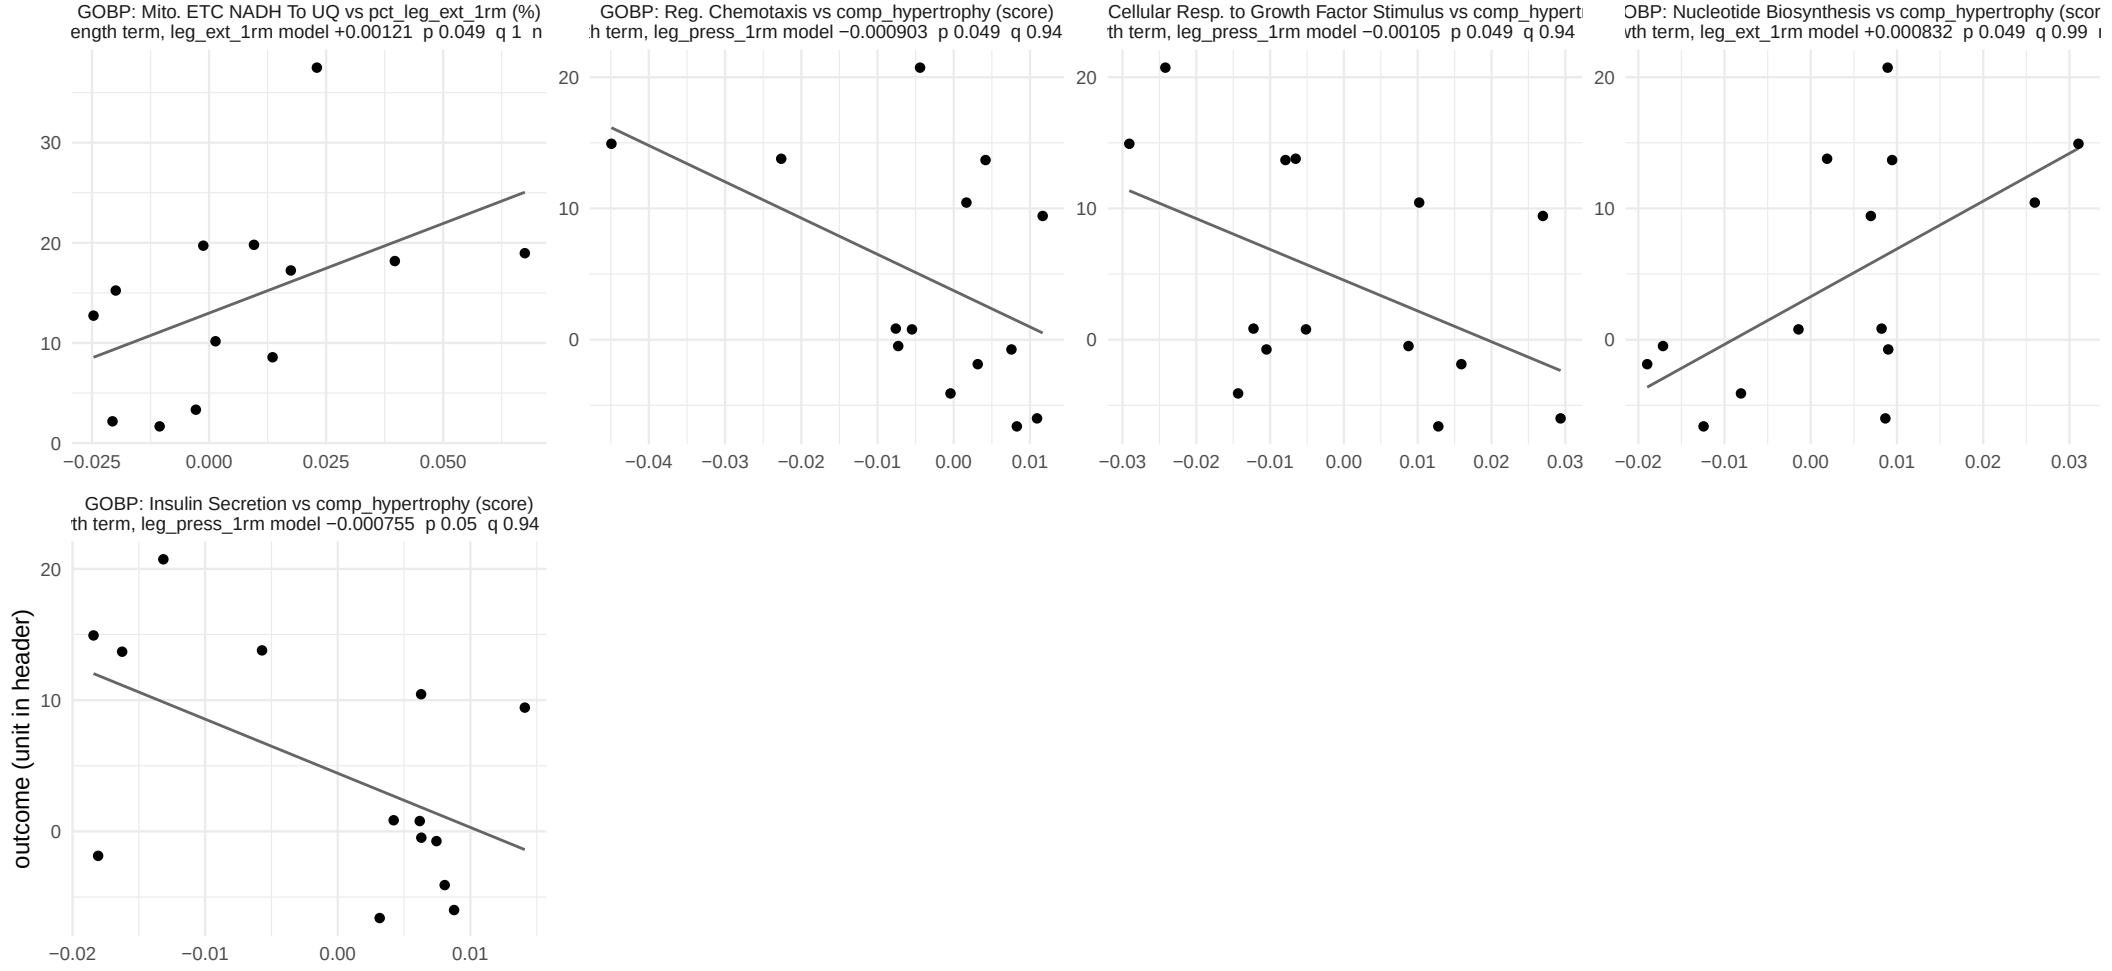

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/02_sets.xlsx, two_predictor.

Two predictor, baseline window


334 of 5512 feature−outcome pairs at p < 0.05, 7 at BH < 0.05. Page 1 of 28.

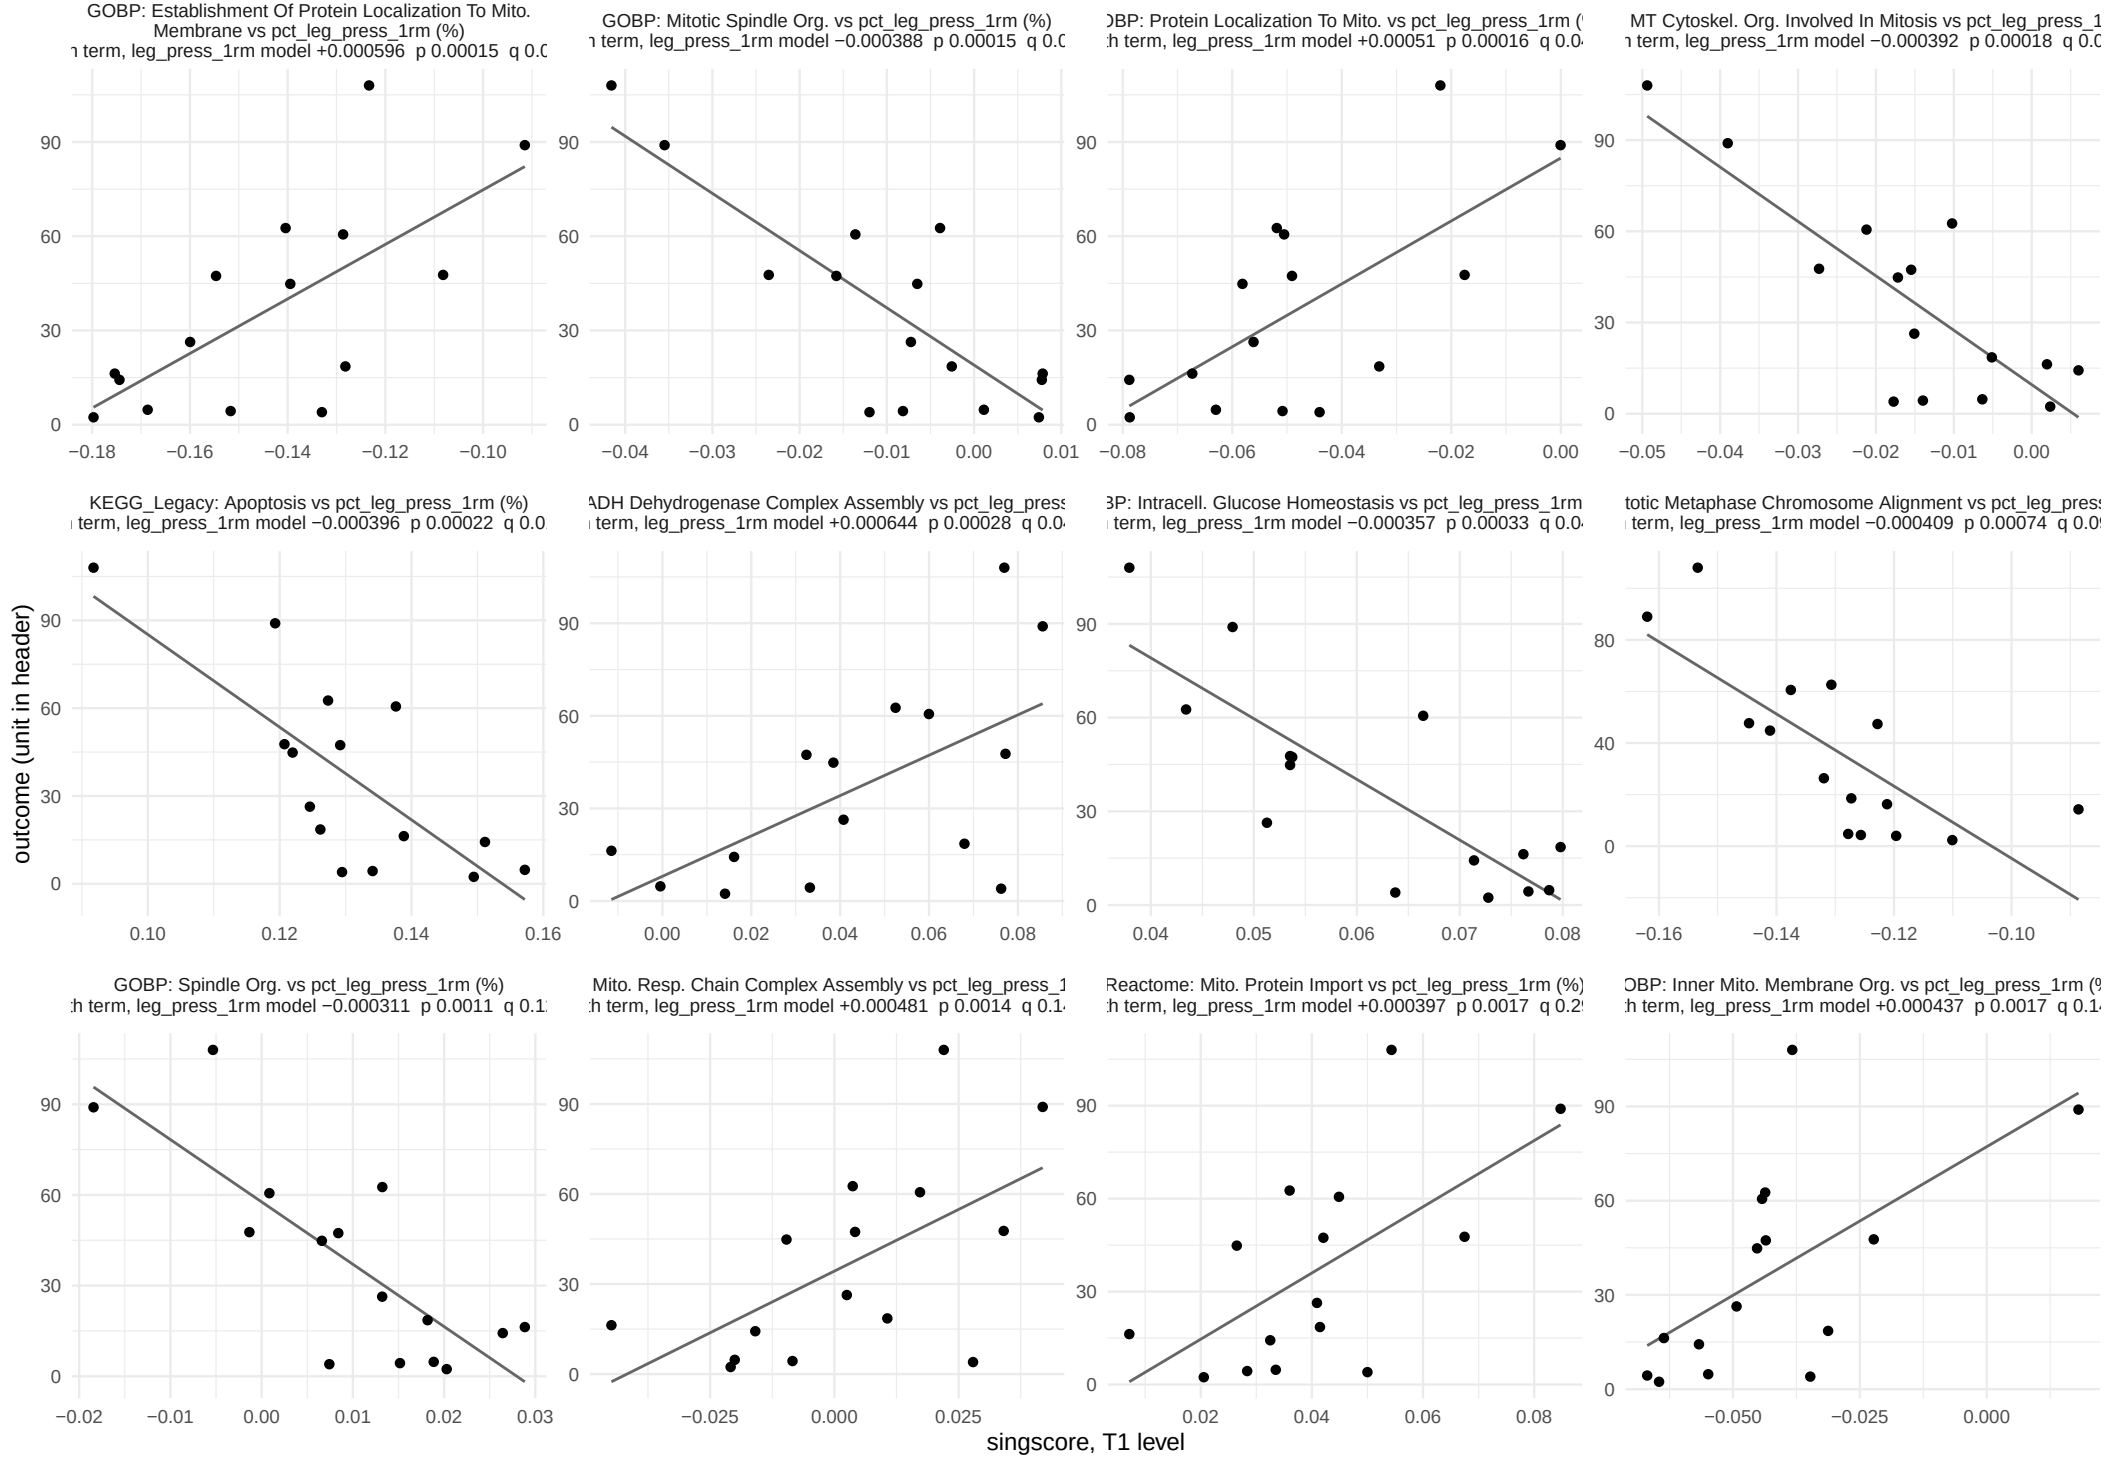

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/02_sets.xlsx, two_predictor.

Two predictor, baseline window


334 of 5512 feature−outcome pairs at p < 0.05, 7 at BH < 0.05. Page 2 of 28.

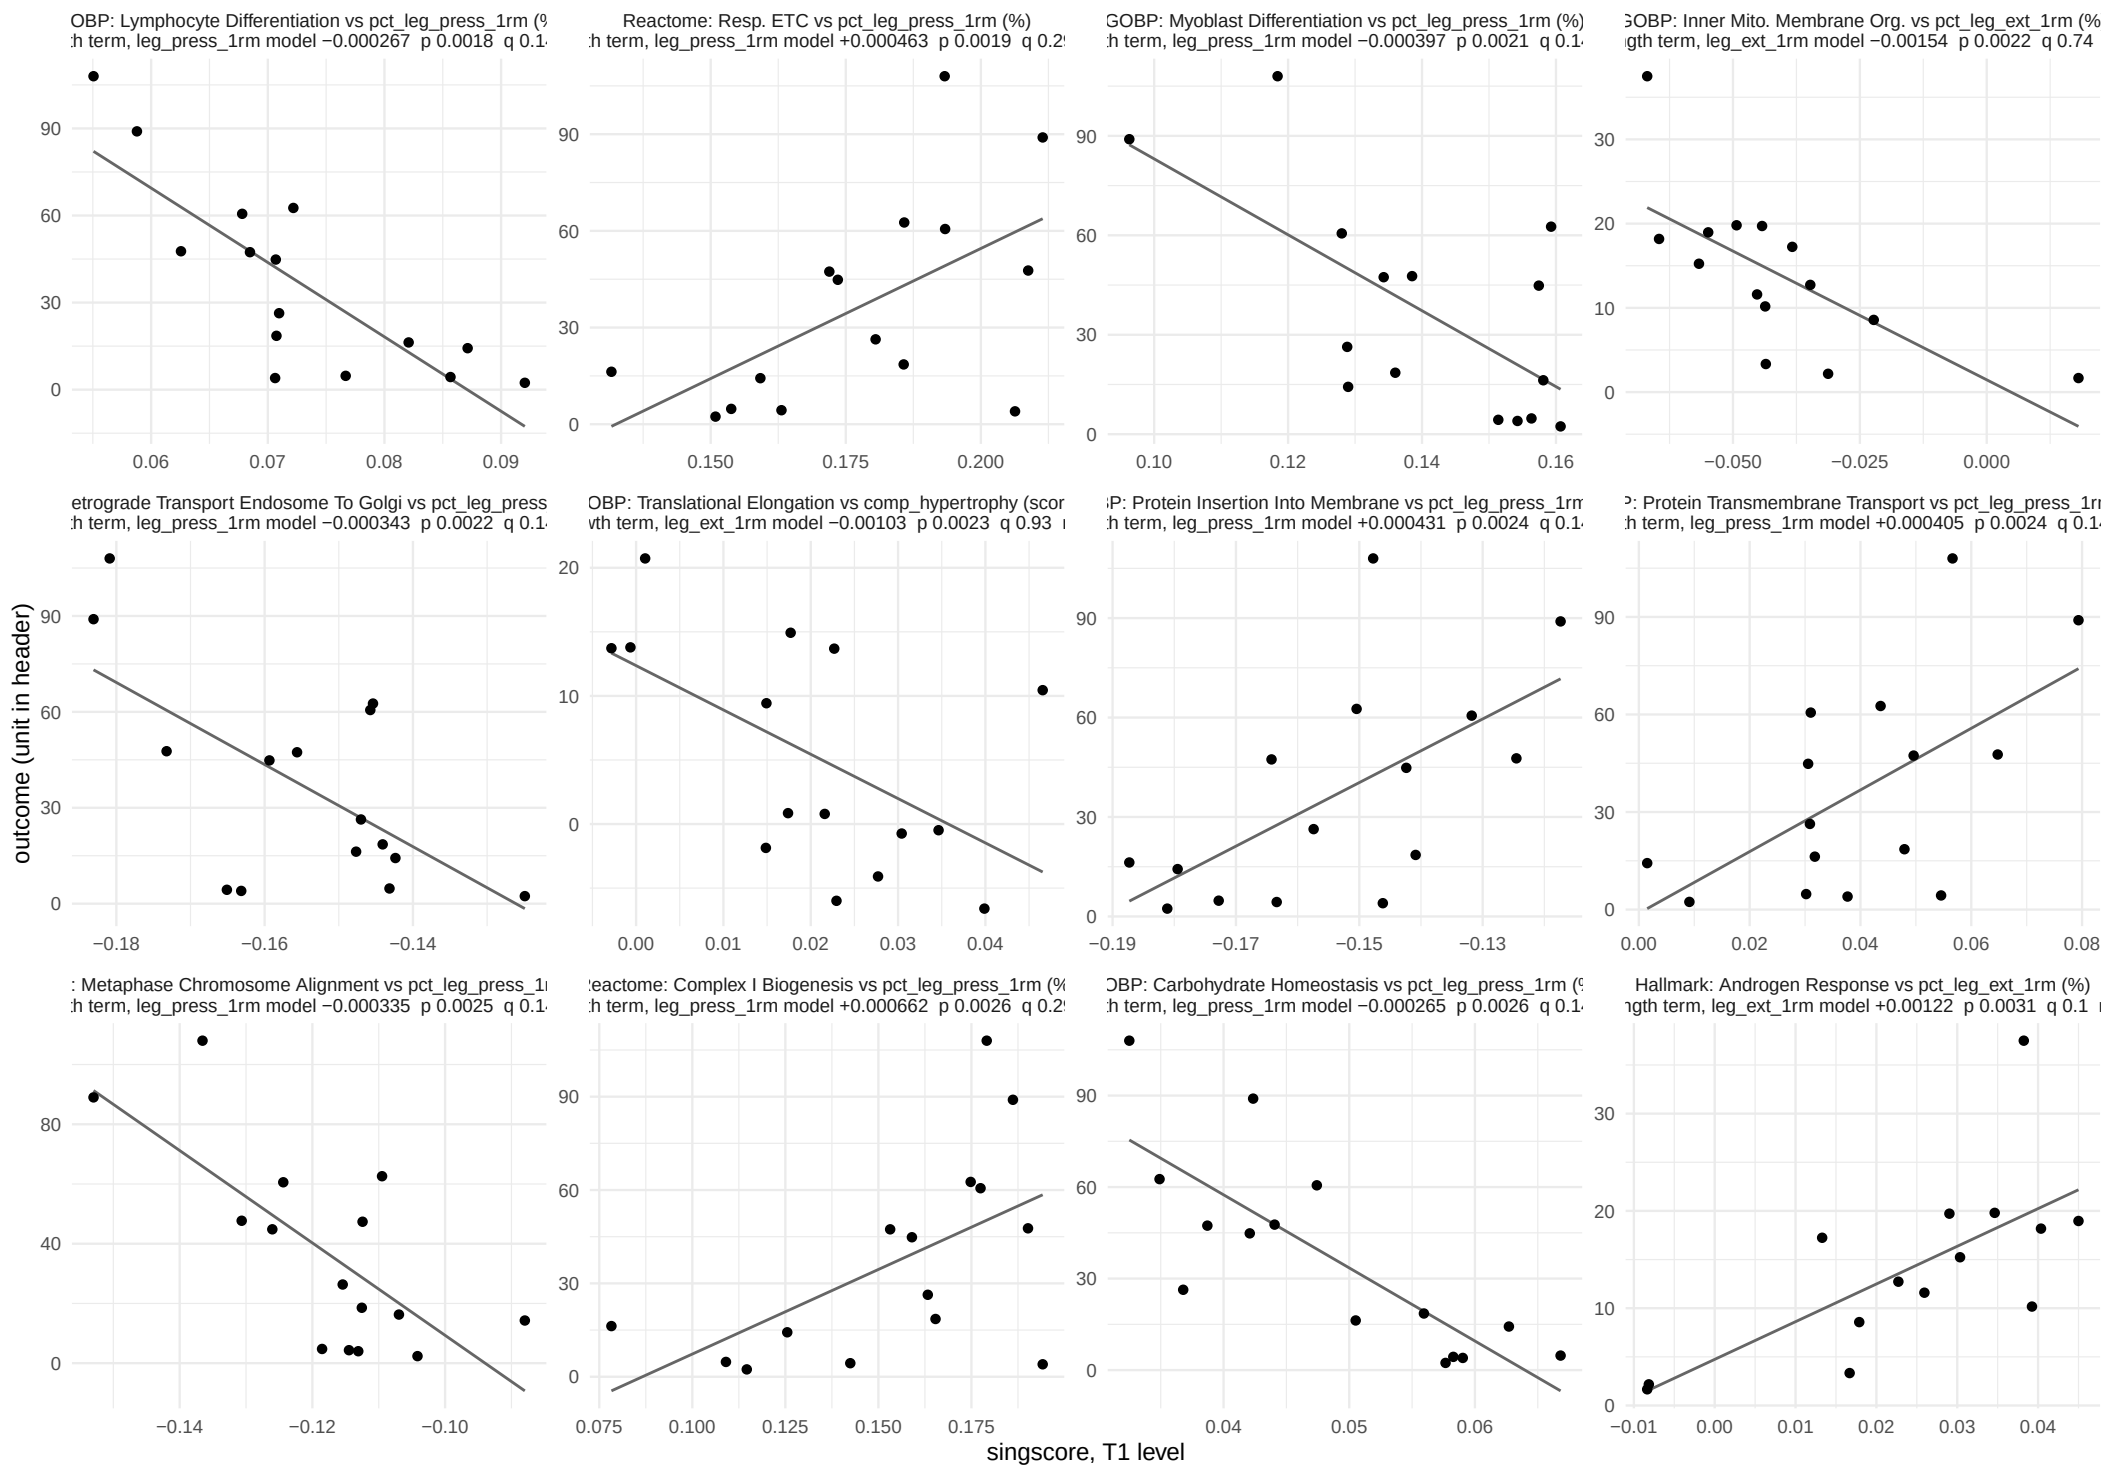

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/02_sets.xlsx, two_predictor.

Two predictor, baseline window


334 of 5512 feature−outcome pairs at p < 0.05, 7 at BH < 0.05. Page 3 of 28.

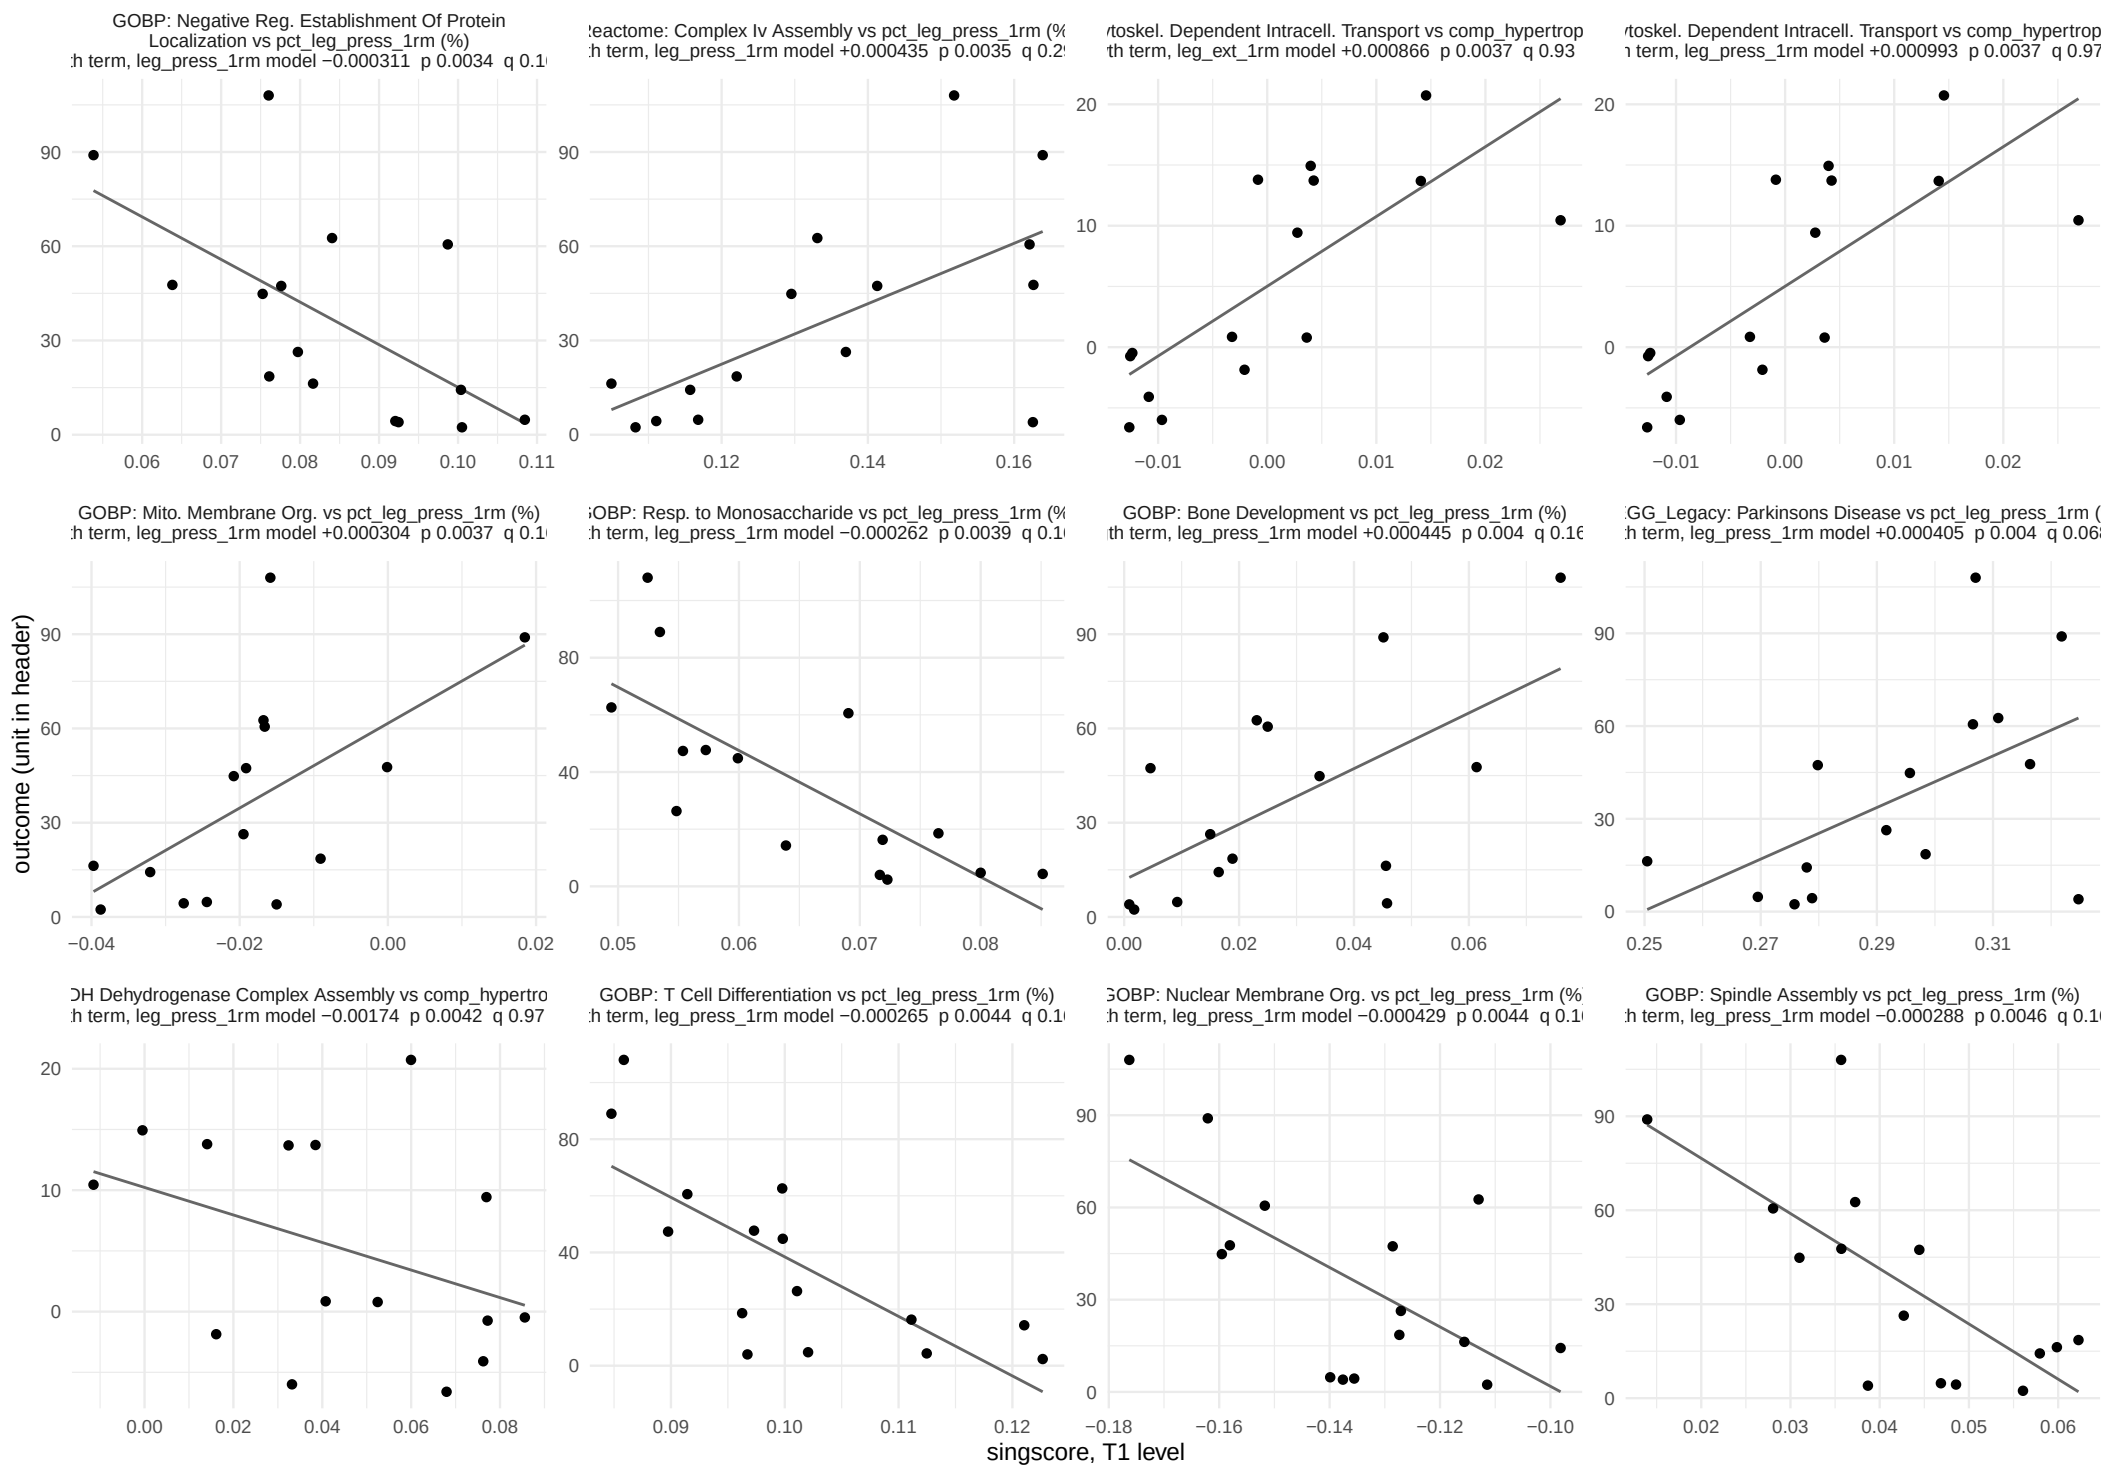

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/02_sets.xlsx, two_predictor.

Two predictor, baseline window


334 of 5512 feature−outcome pairs at p < 0.05, 7 at BH < 0.05. Page 4 of 28.

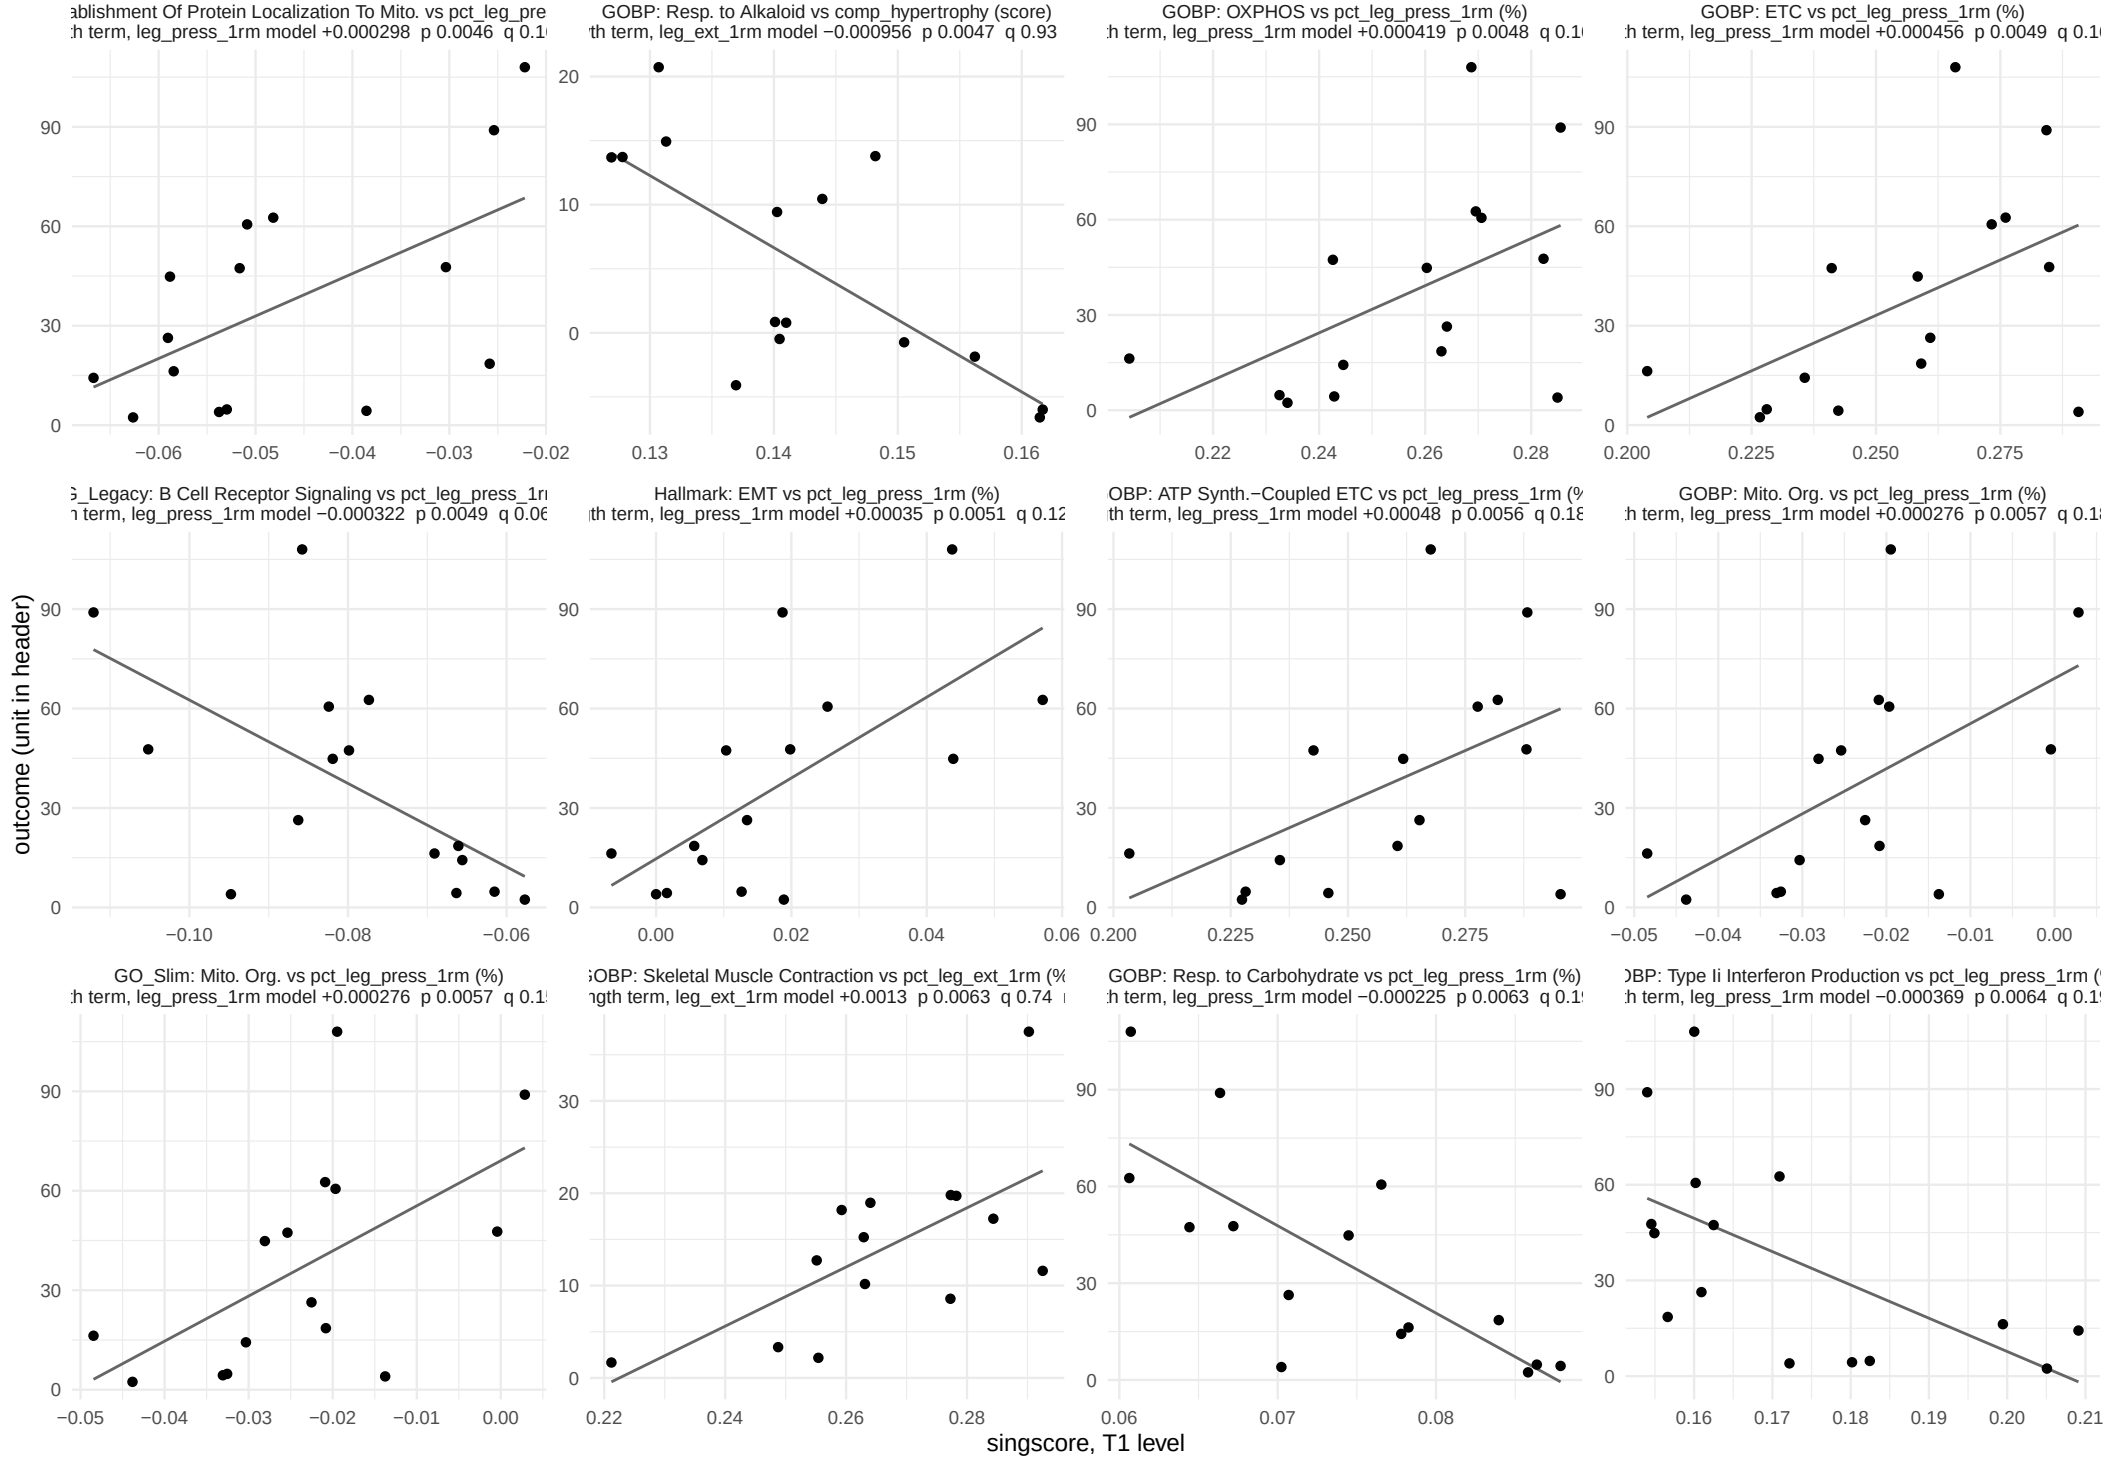

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/02_sets.xlsx, two_predictor.

Two predictor, baseline window


334 of 5512 feature−outcome pairs at p < 0.05, 7 at BH < 0.05. Page 5 of 28.

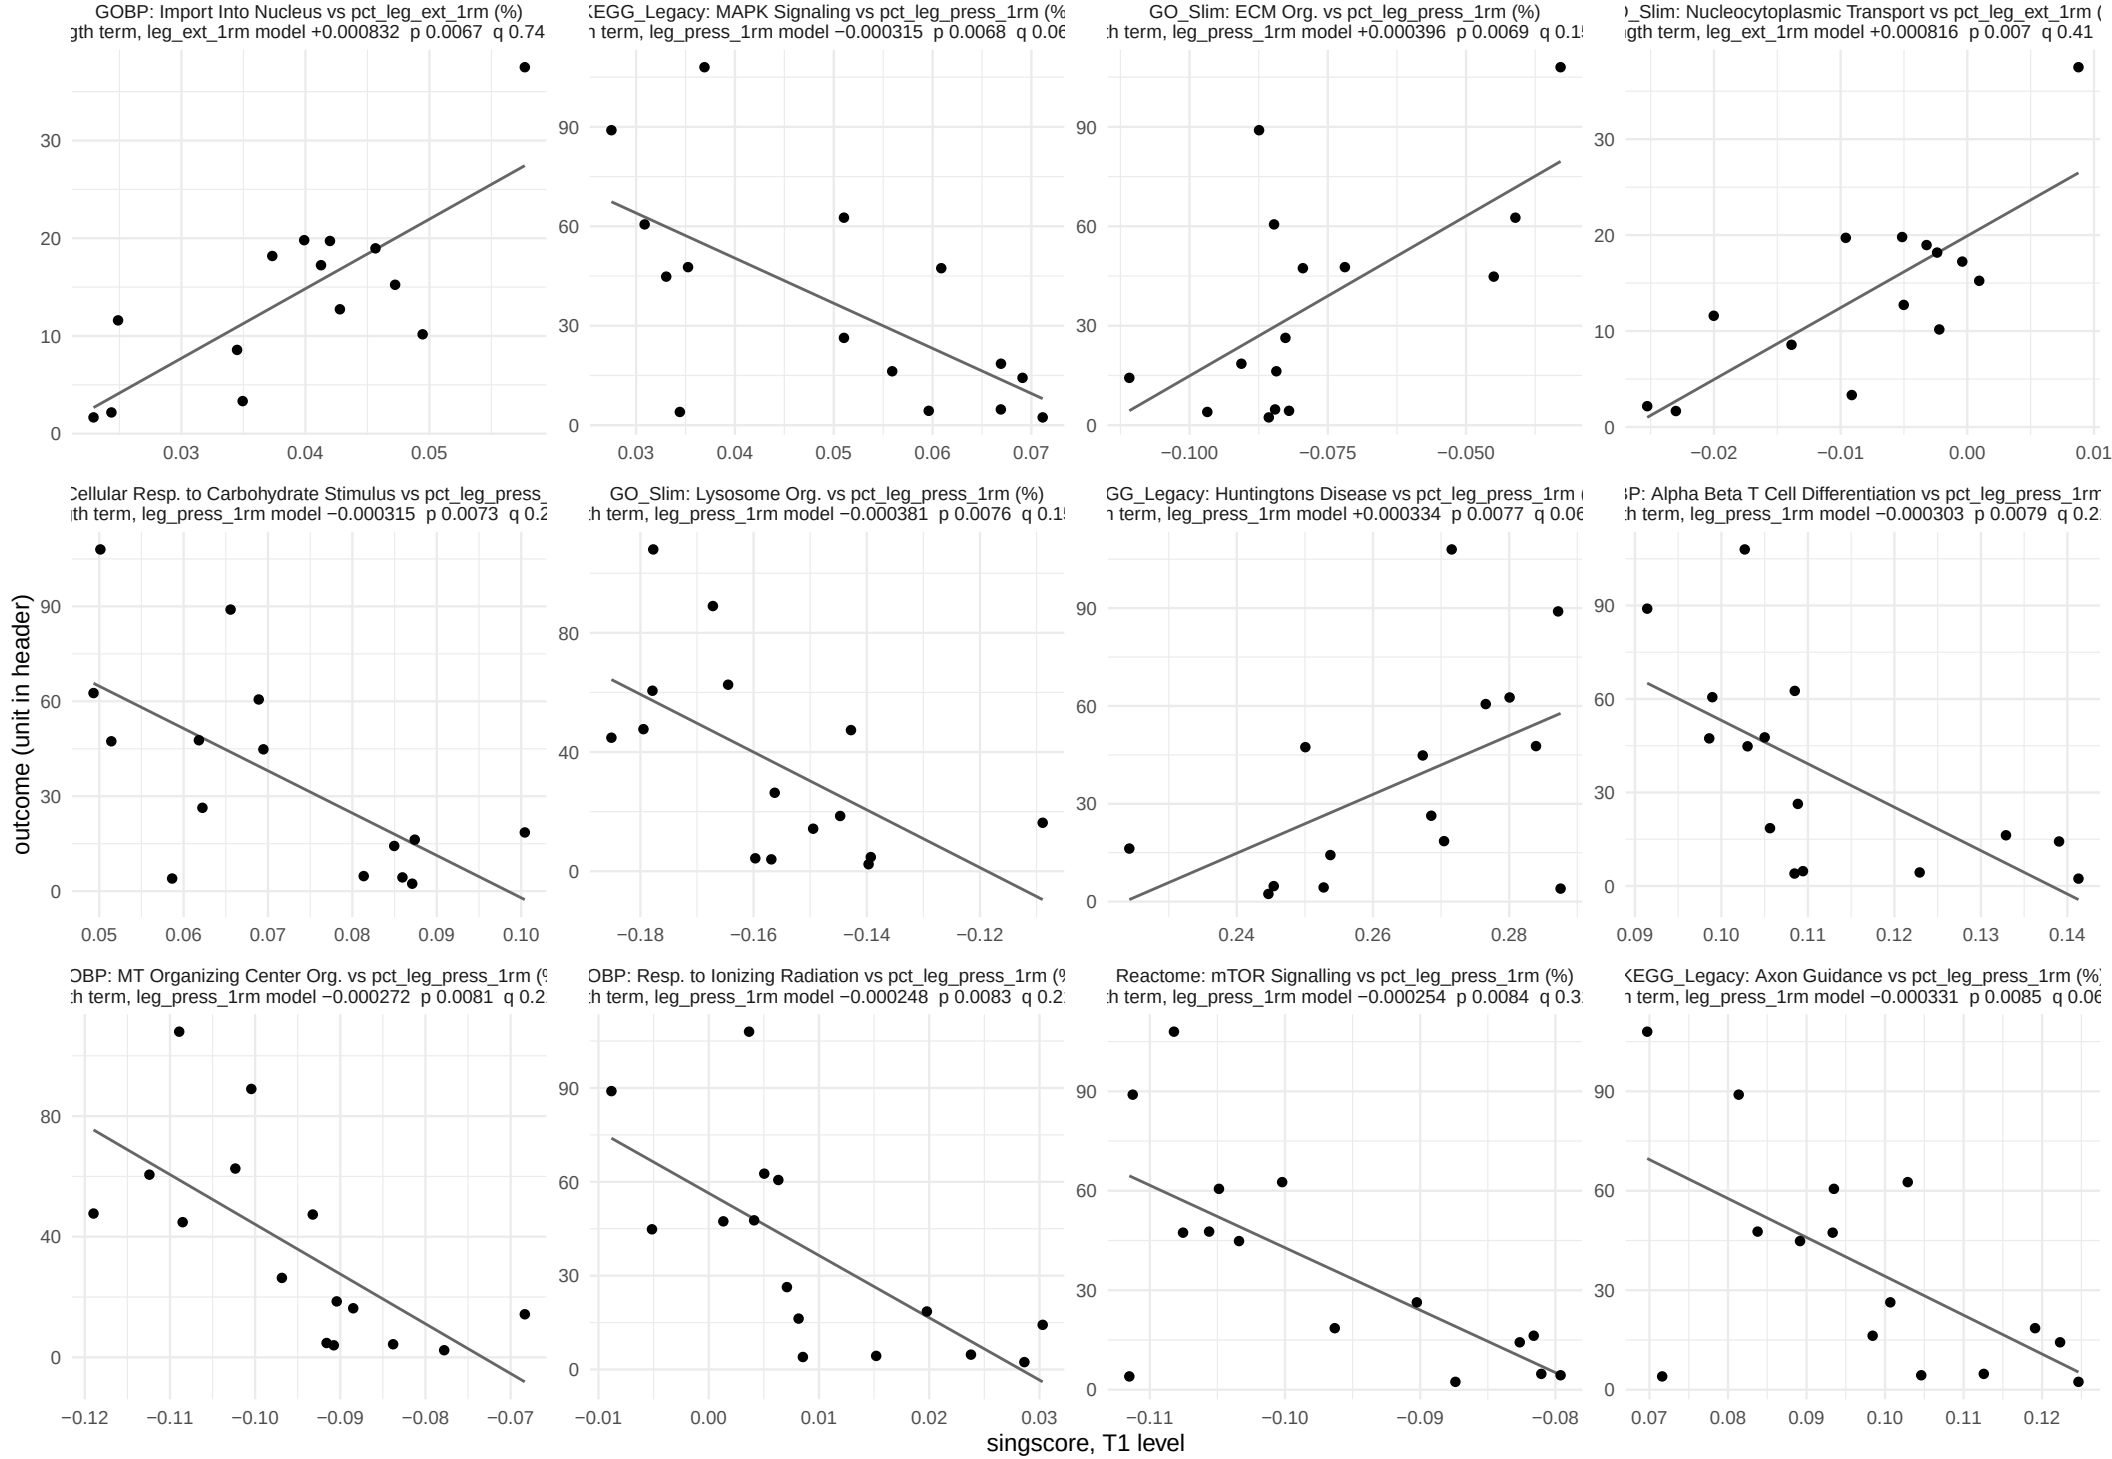

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/02_sets.xlsx, two_predictor.

Two predictor, baseline window


334 of 5512 feature−outcome pairs at p < 0.05, 7 at BH < 0.05. Page 6 of 28.

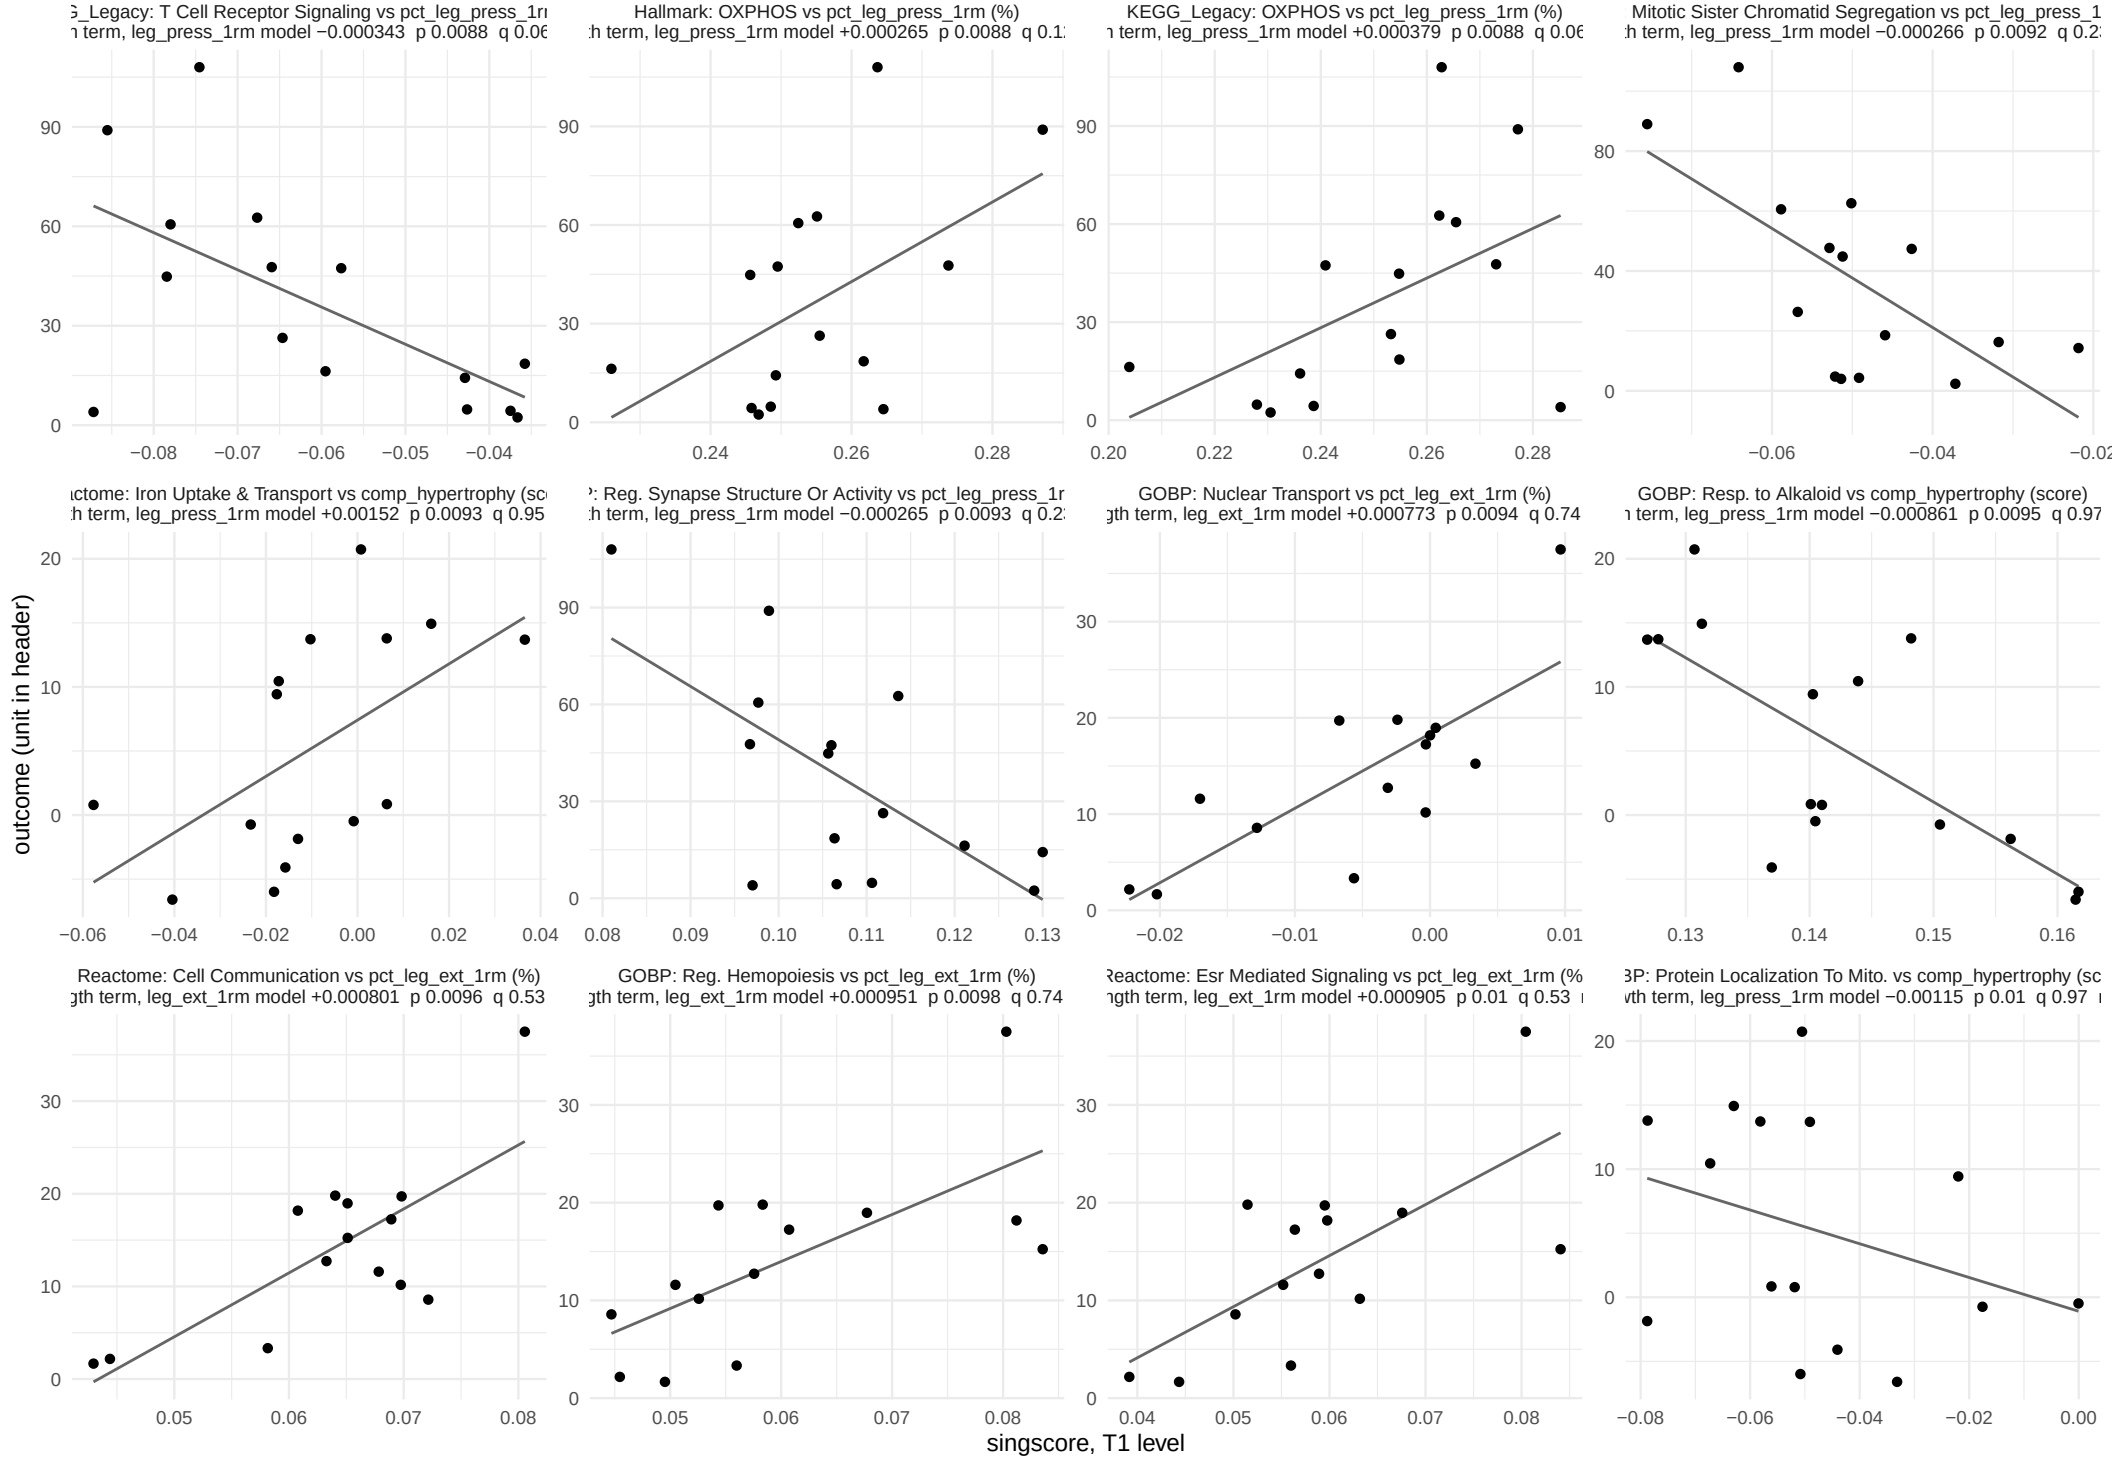

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/02_sets.xlsx, two_predictor.

Two predictor, baseline window


334 of 5512 feature−outcome pairs at p < 0.05, 7 at BH < 0.05. Page 7 of 28.

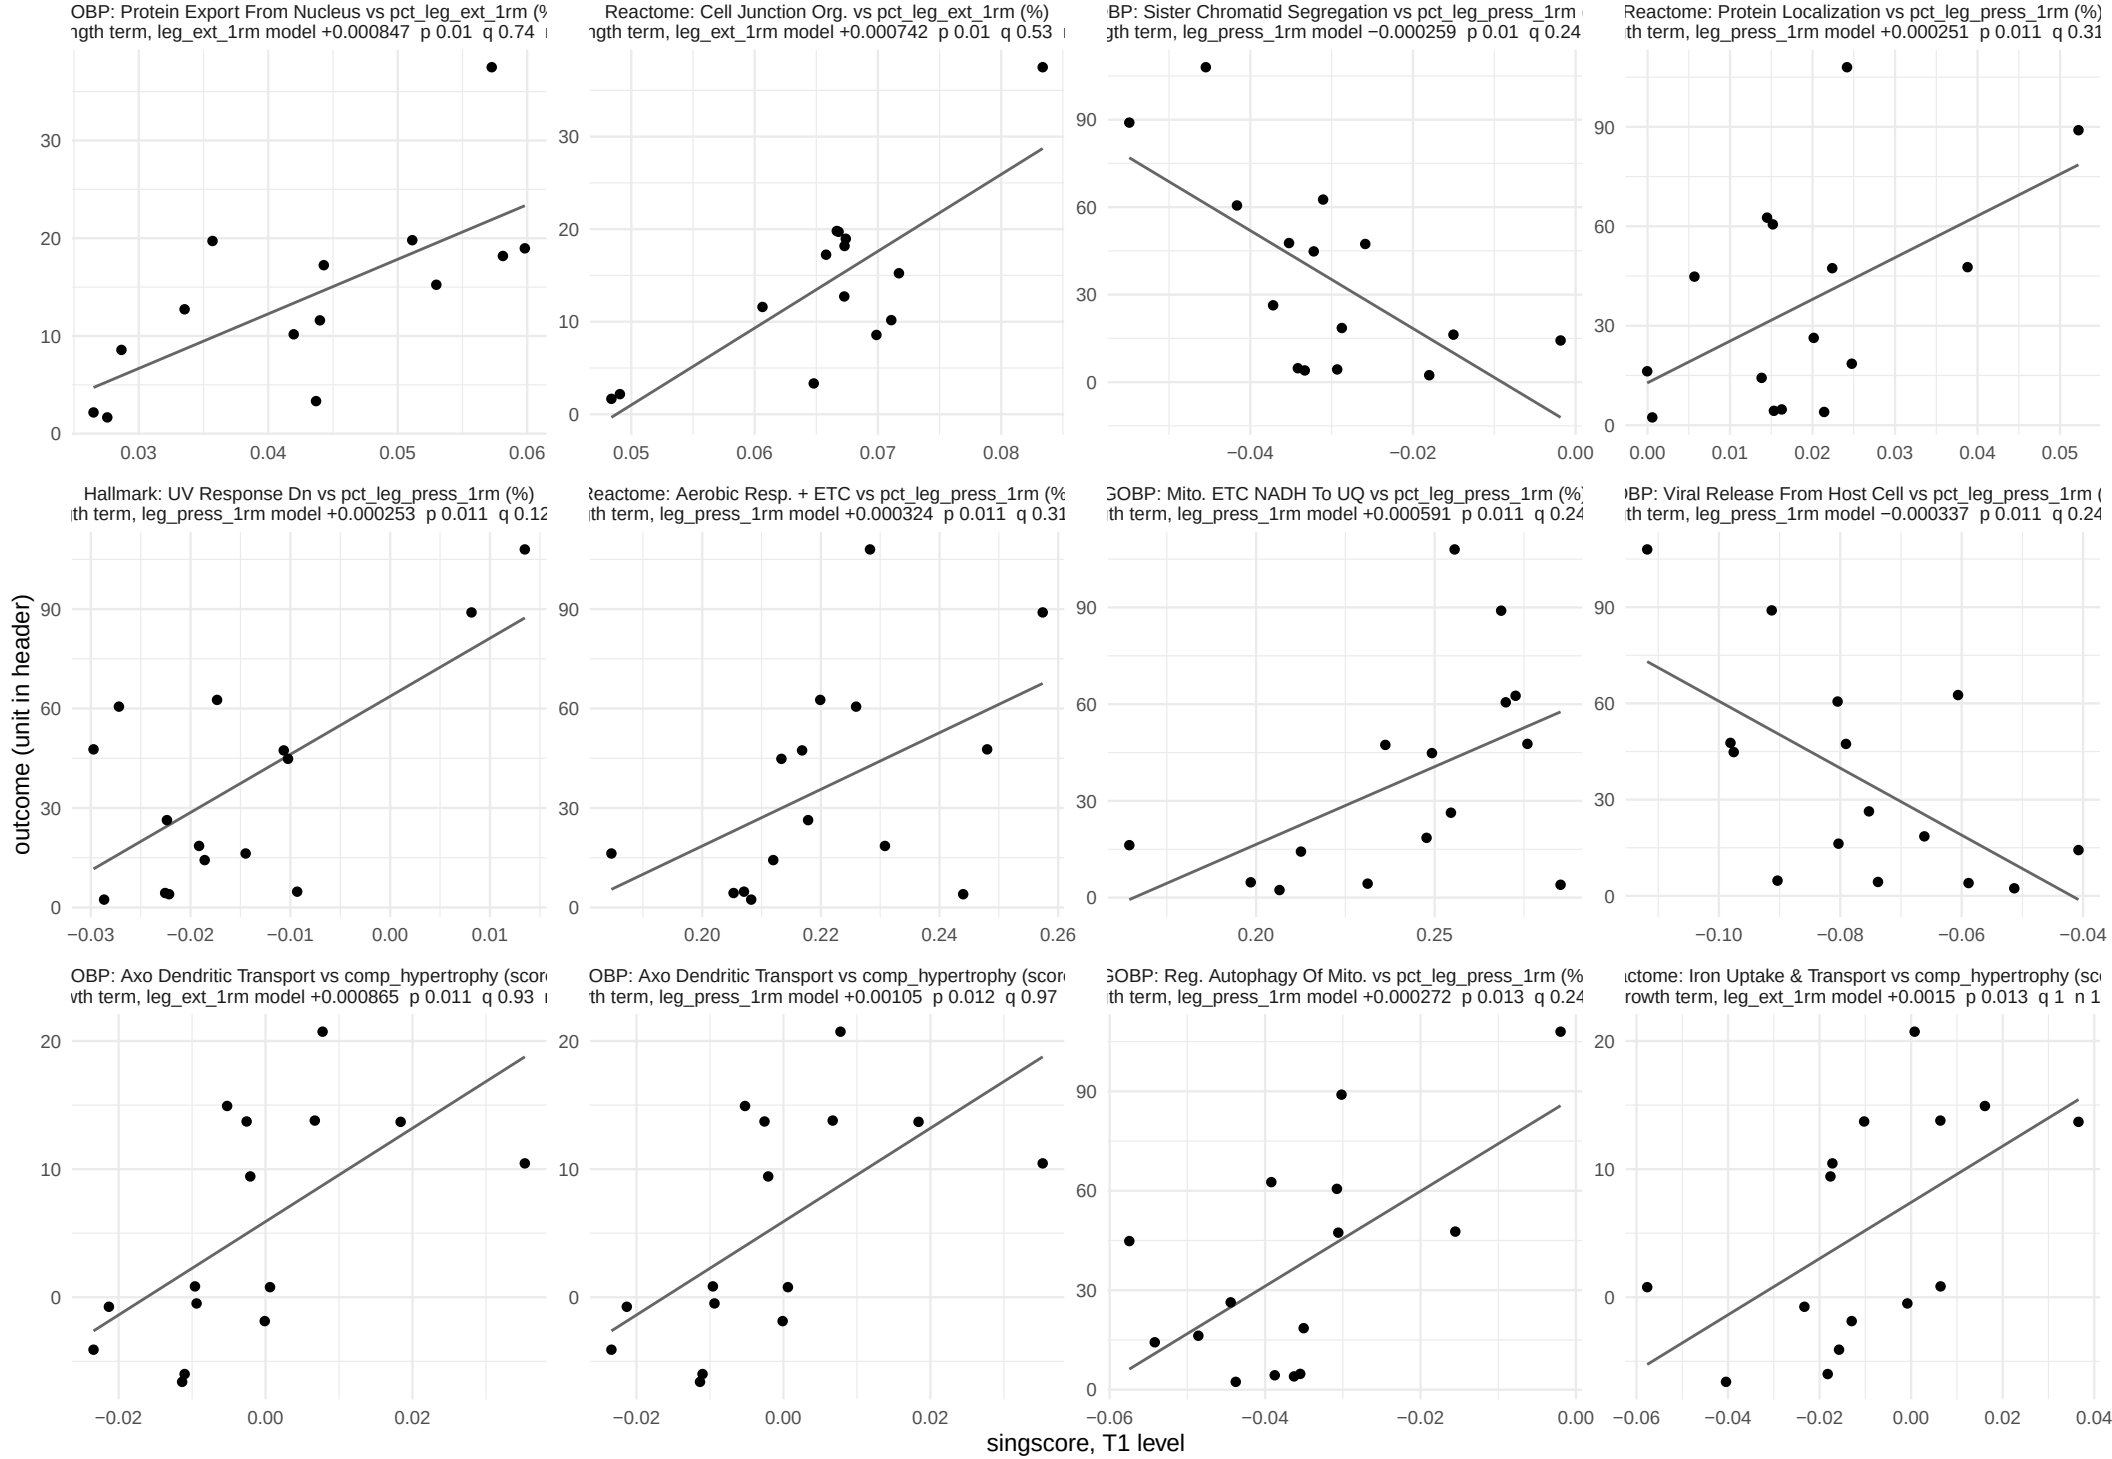

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/02_sets.xlsx, two_predictor.

Two predictor, baseline window


334 of 5512 feature−outcome pairs at p < 0.05, 7 at BH < 0.05. Page 8 of 28.

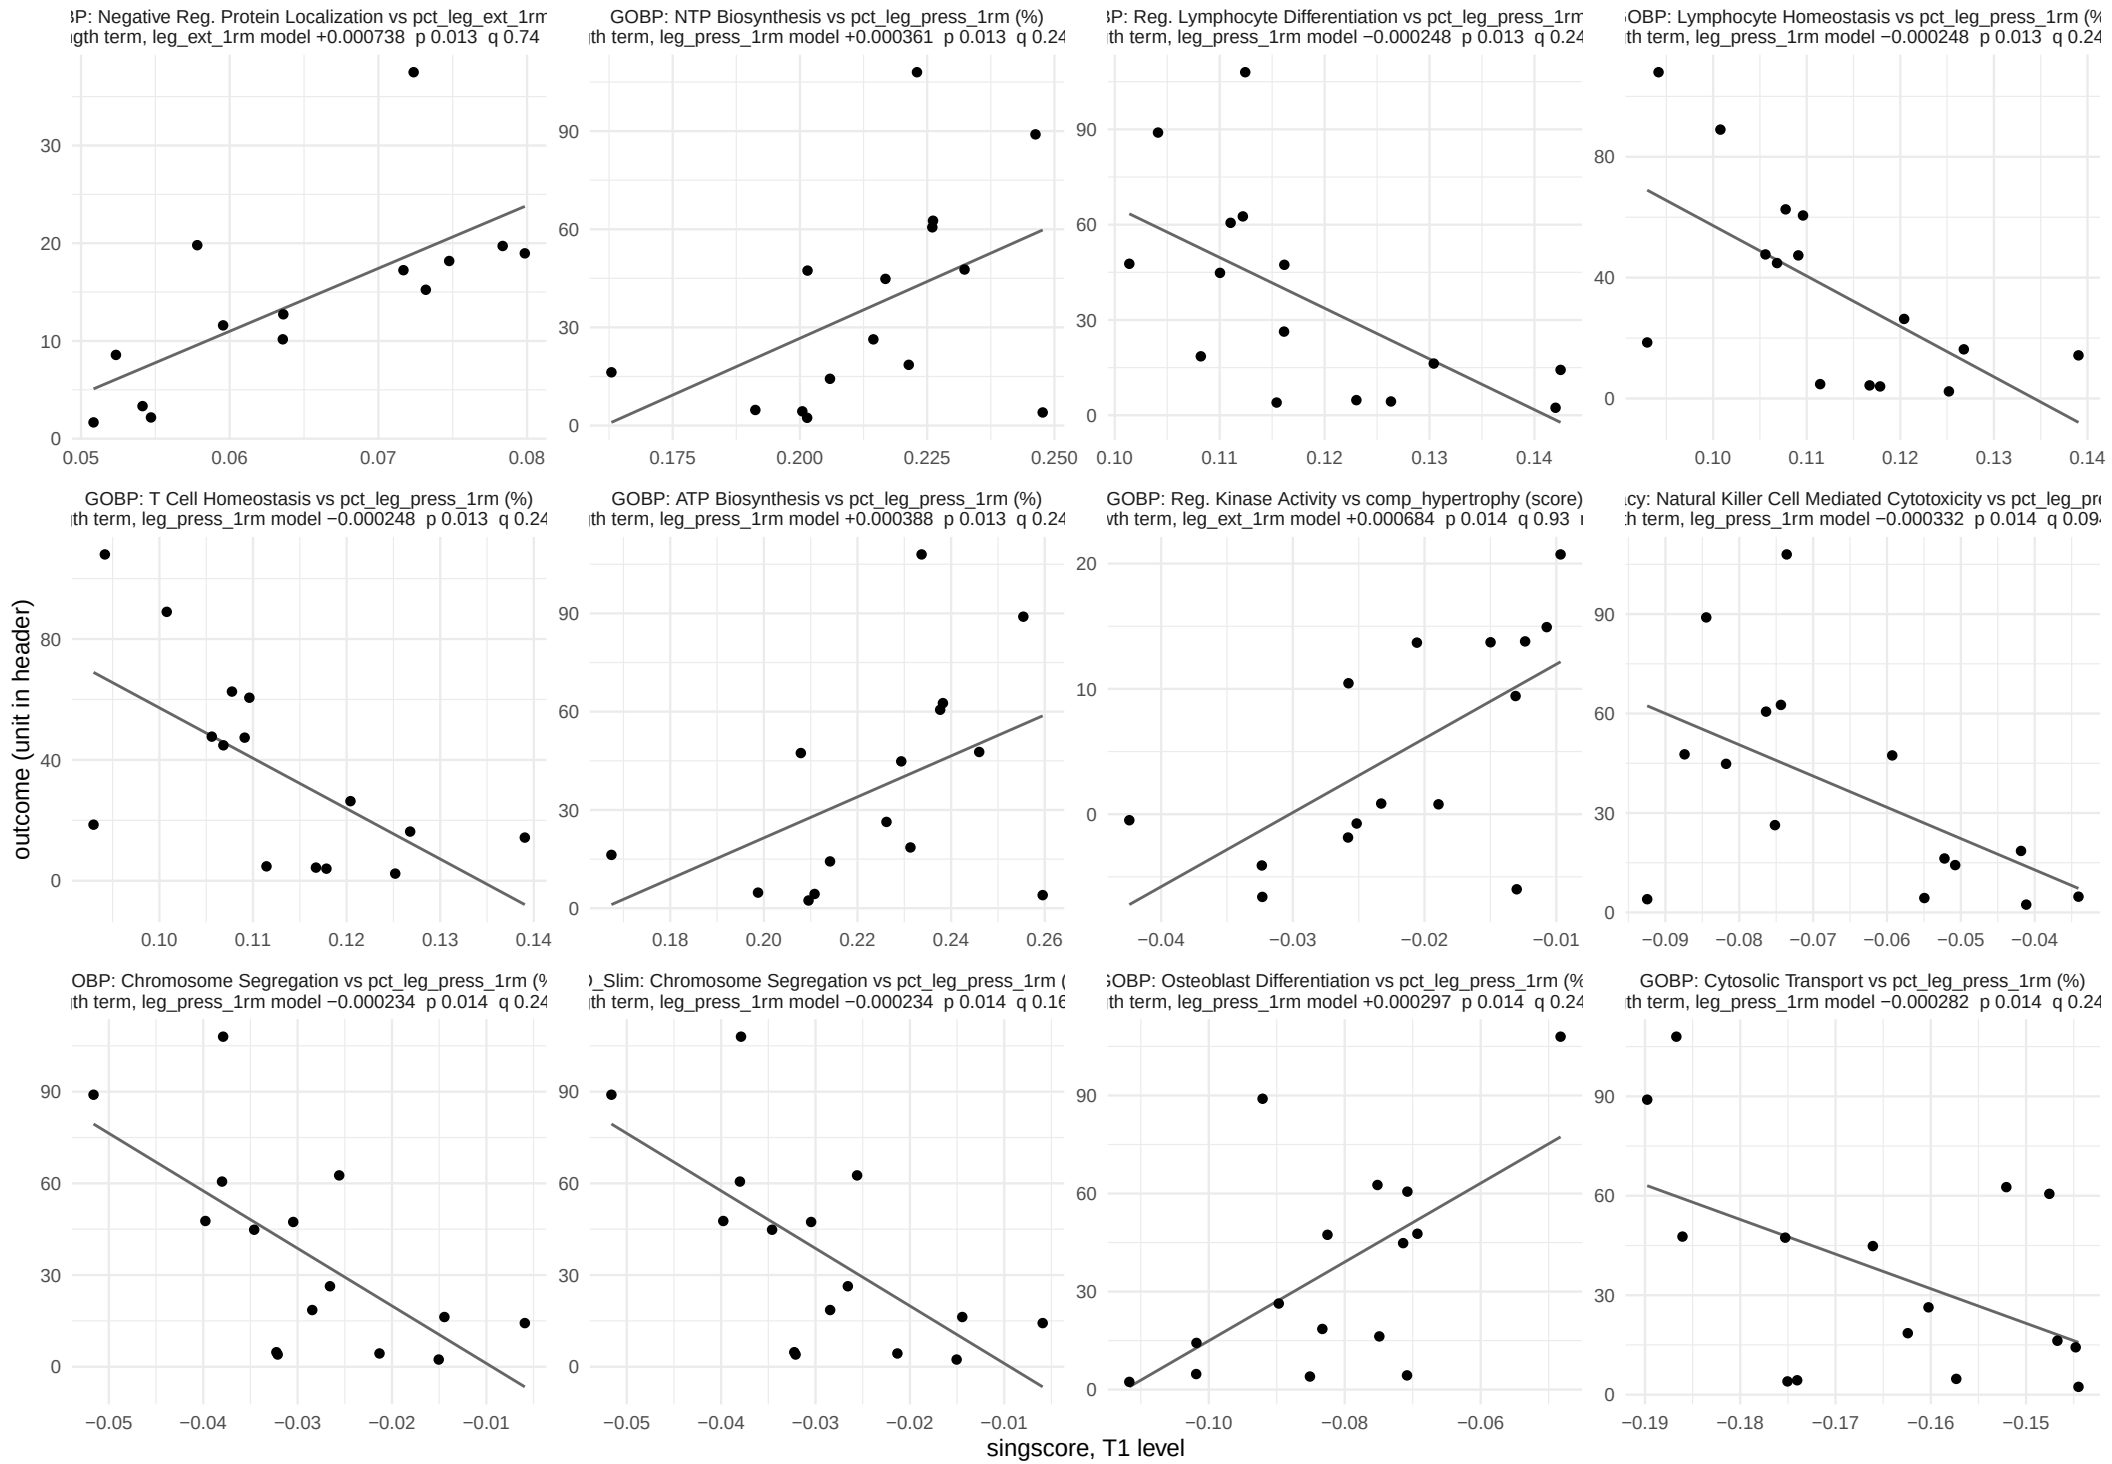

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/02_sets.xlsx, two_predictor.

Two predictor, baseline window


334 of 5512 feature−outcome pairs at p < 0.05, 7 at BH < 0.05. Page 9 of 28.

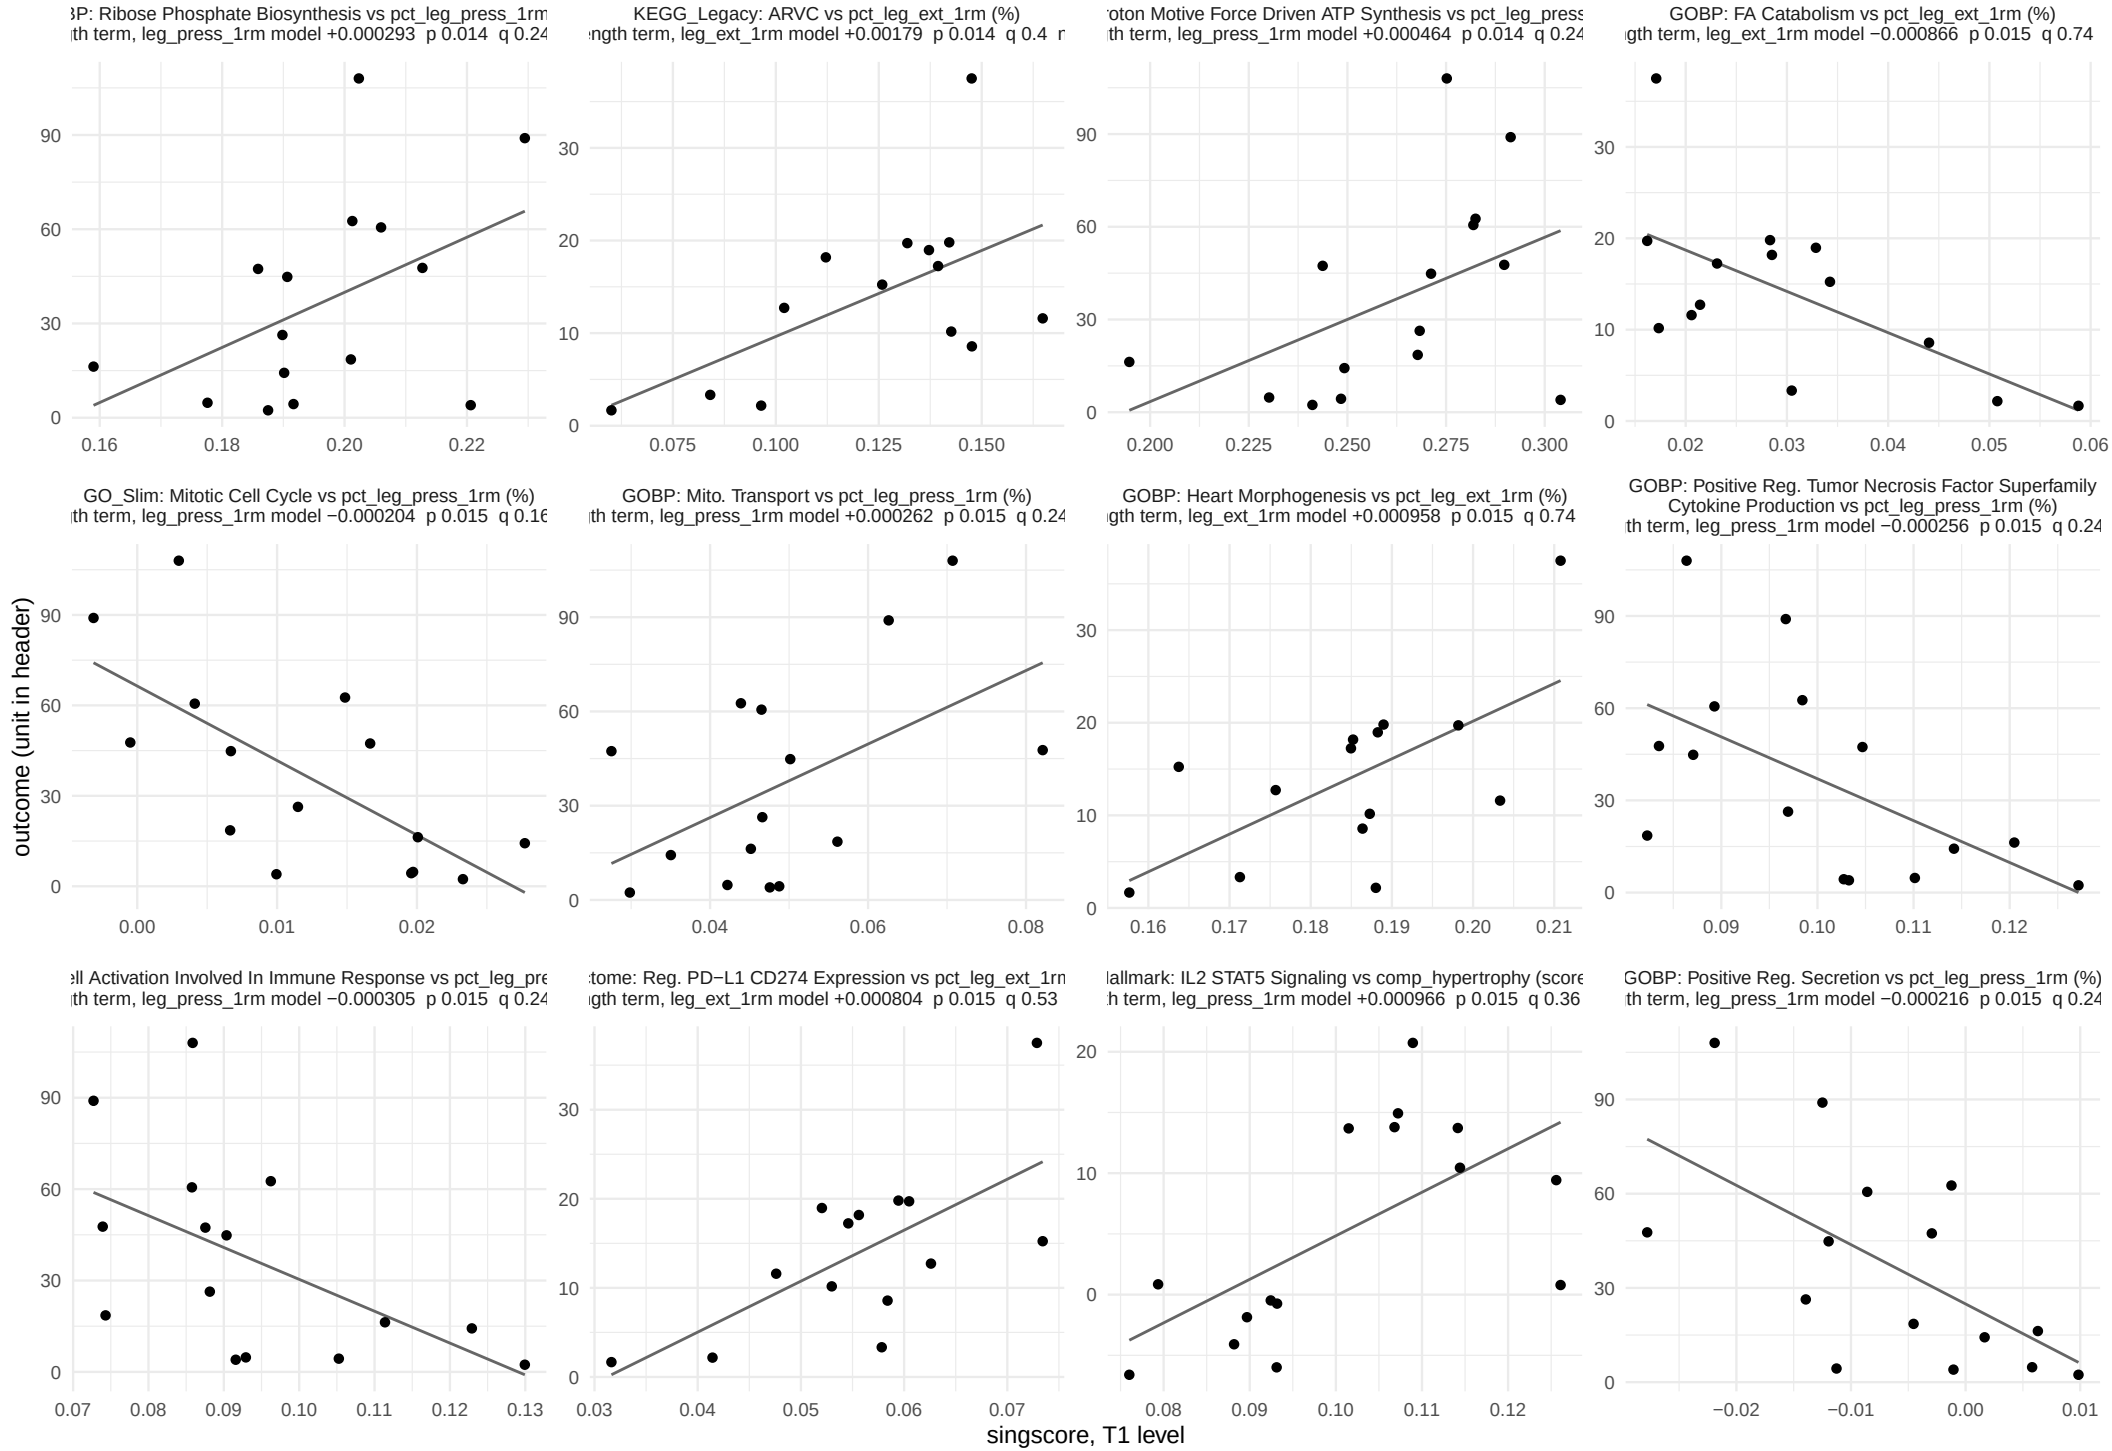

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/02_sets.xlsx, two_predictor.

Two predictor, baseline window


334 of 5512 feature−outcome pairs at p < 0.05, 7 at BH < 0.05. Page 10 of 28.

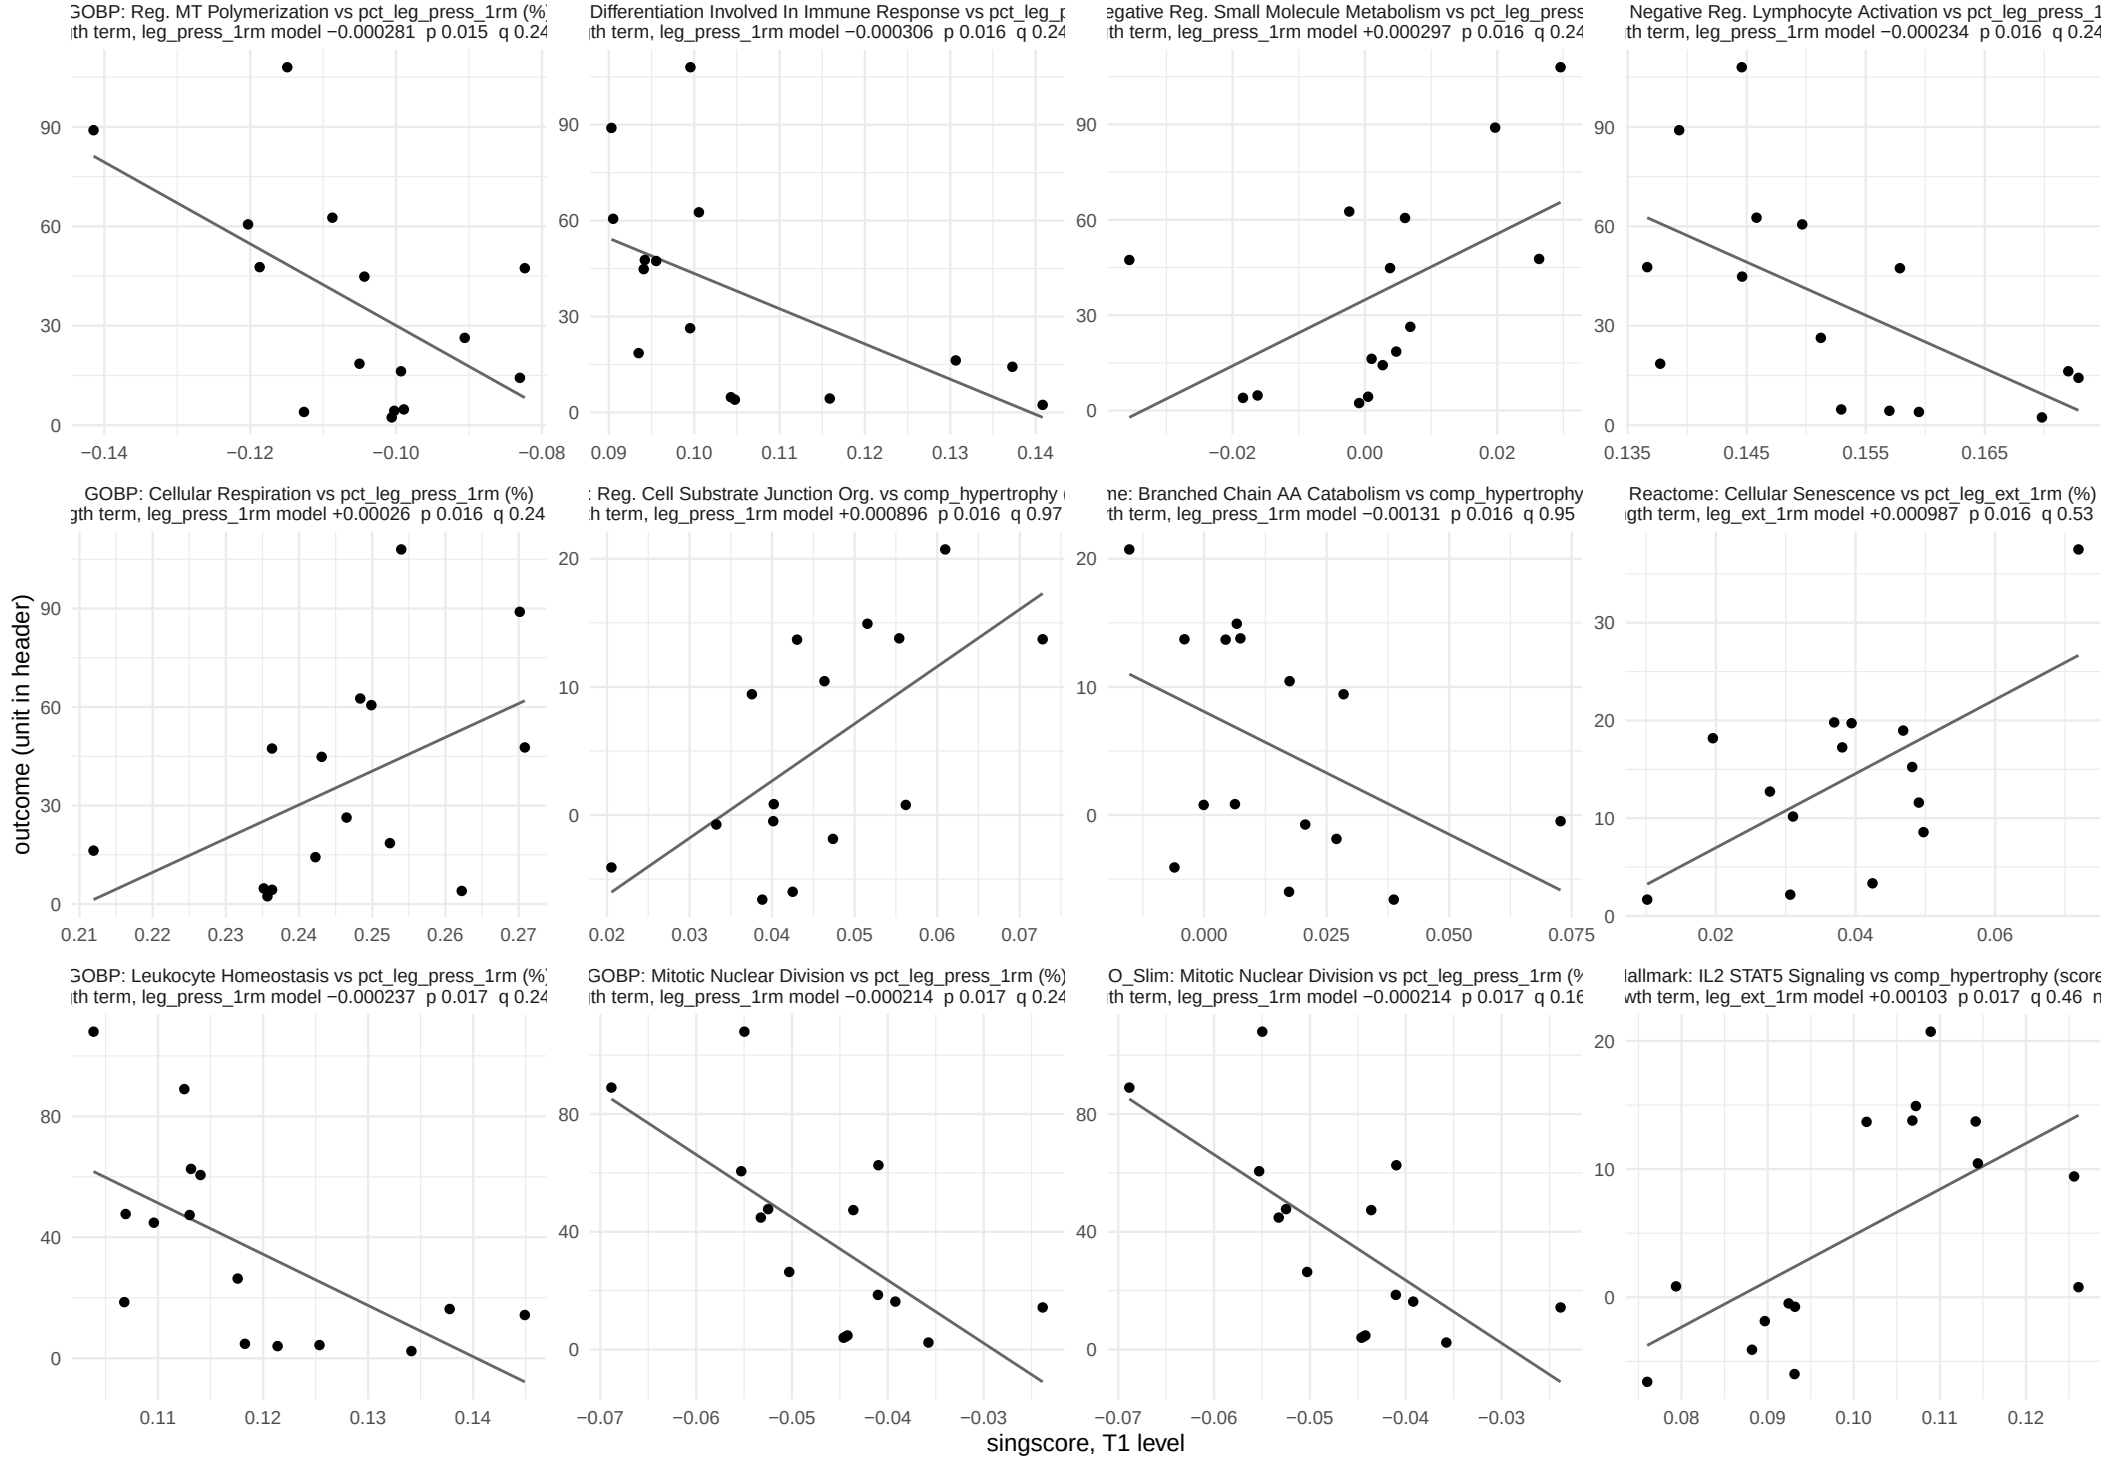

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/02_sets.xlsx, two_predictor.

Two predictor, baseline window


334 of 5512 feature−outcome pairs at p < 0.05, 7 at BH < 0.05. Page 11 of 28.

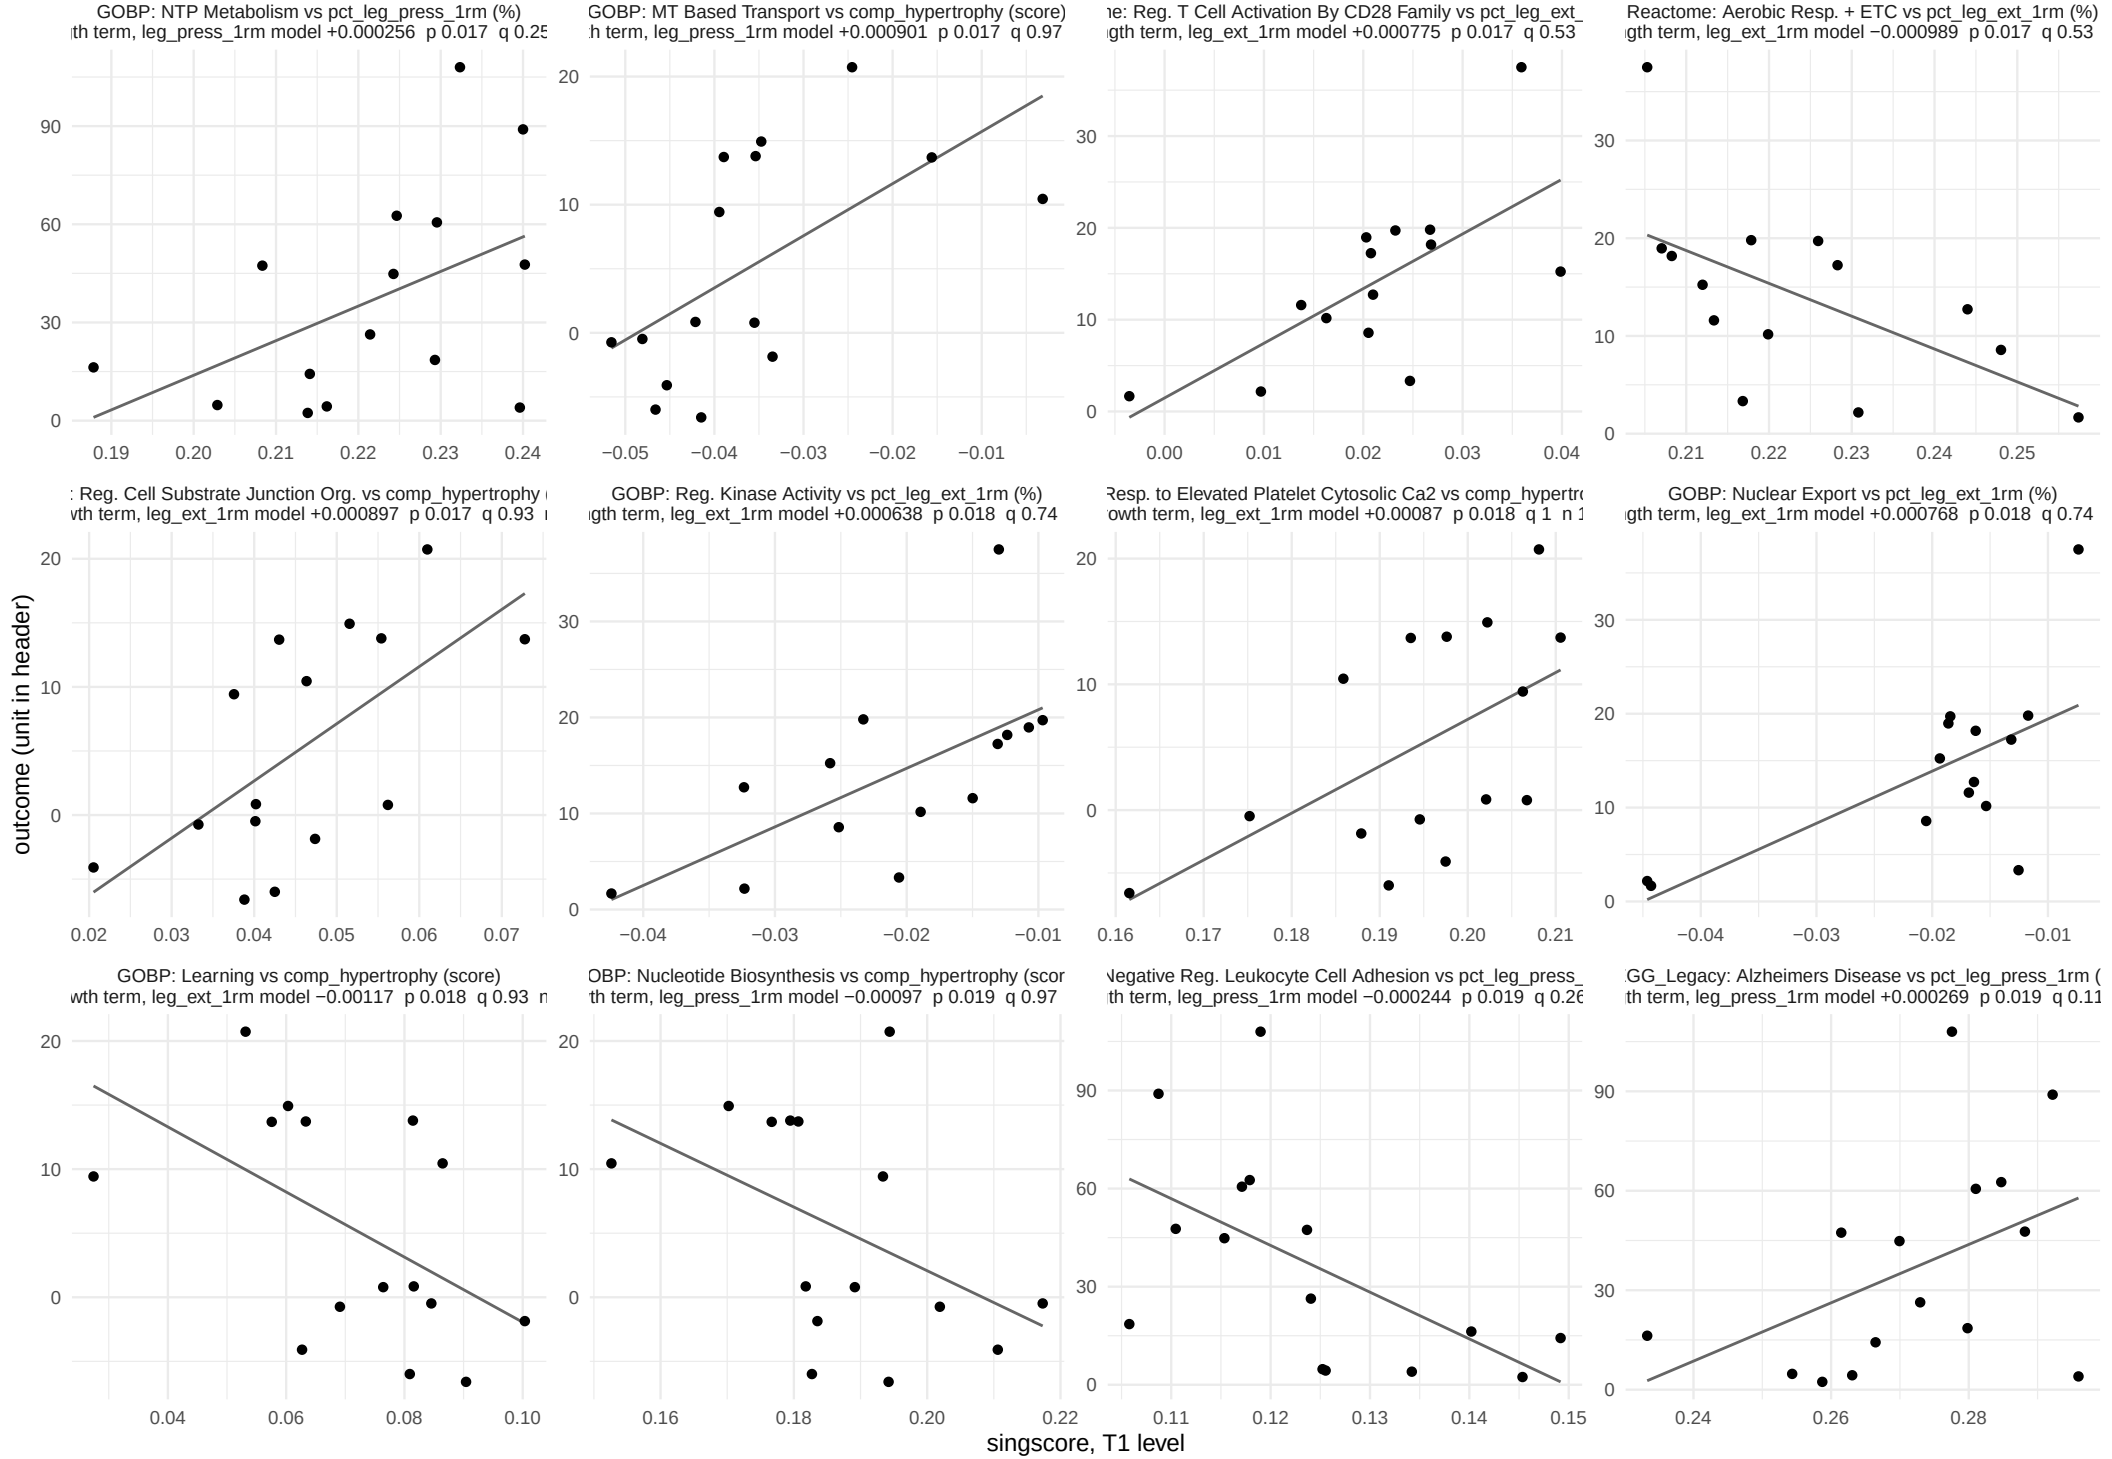

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/02_sets.xlsx, two_predictor.

Two predictor, baseline window


334 of 5512 feature−outcome pairs at p < 0.05, 7 at BH < 0.05. Page 12 of 28.

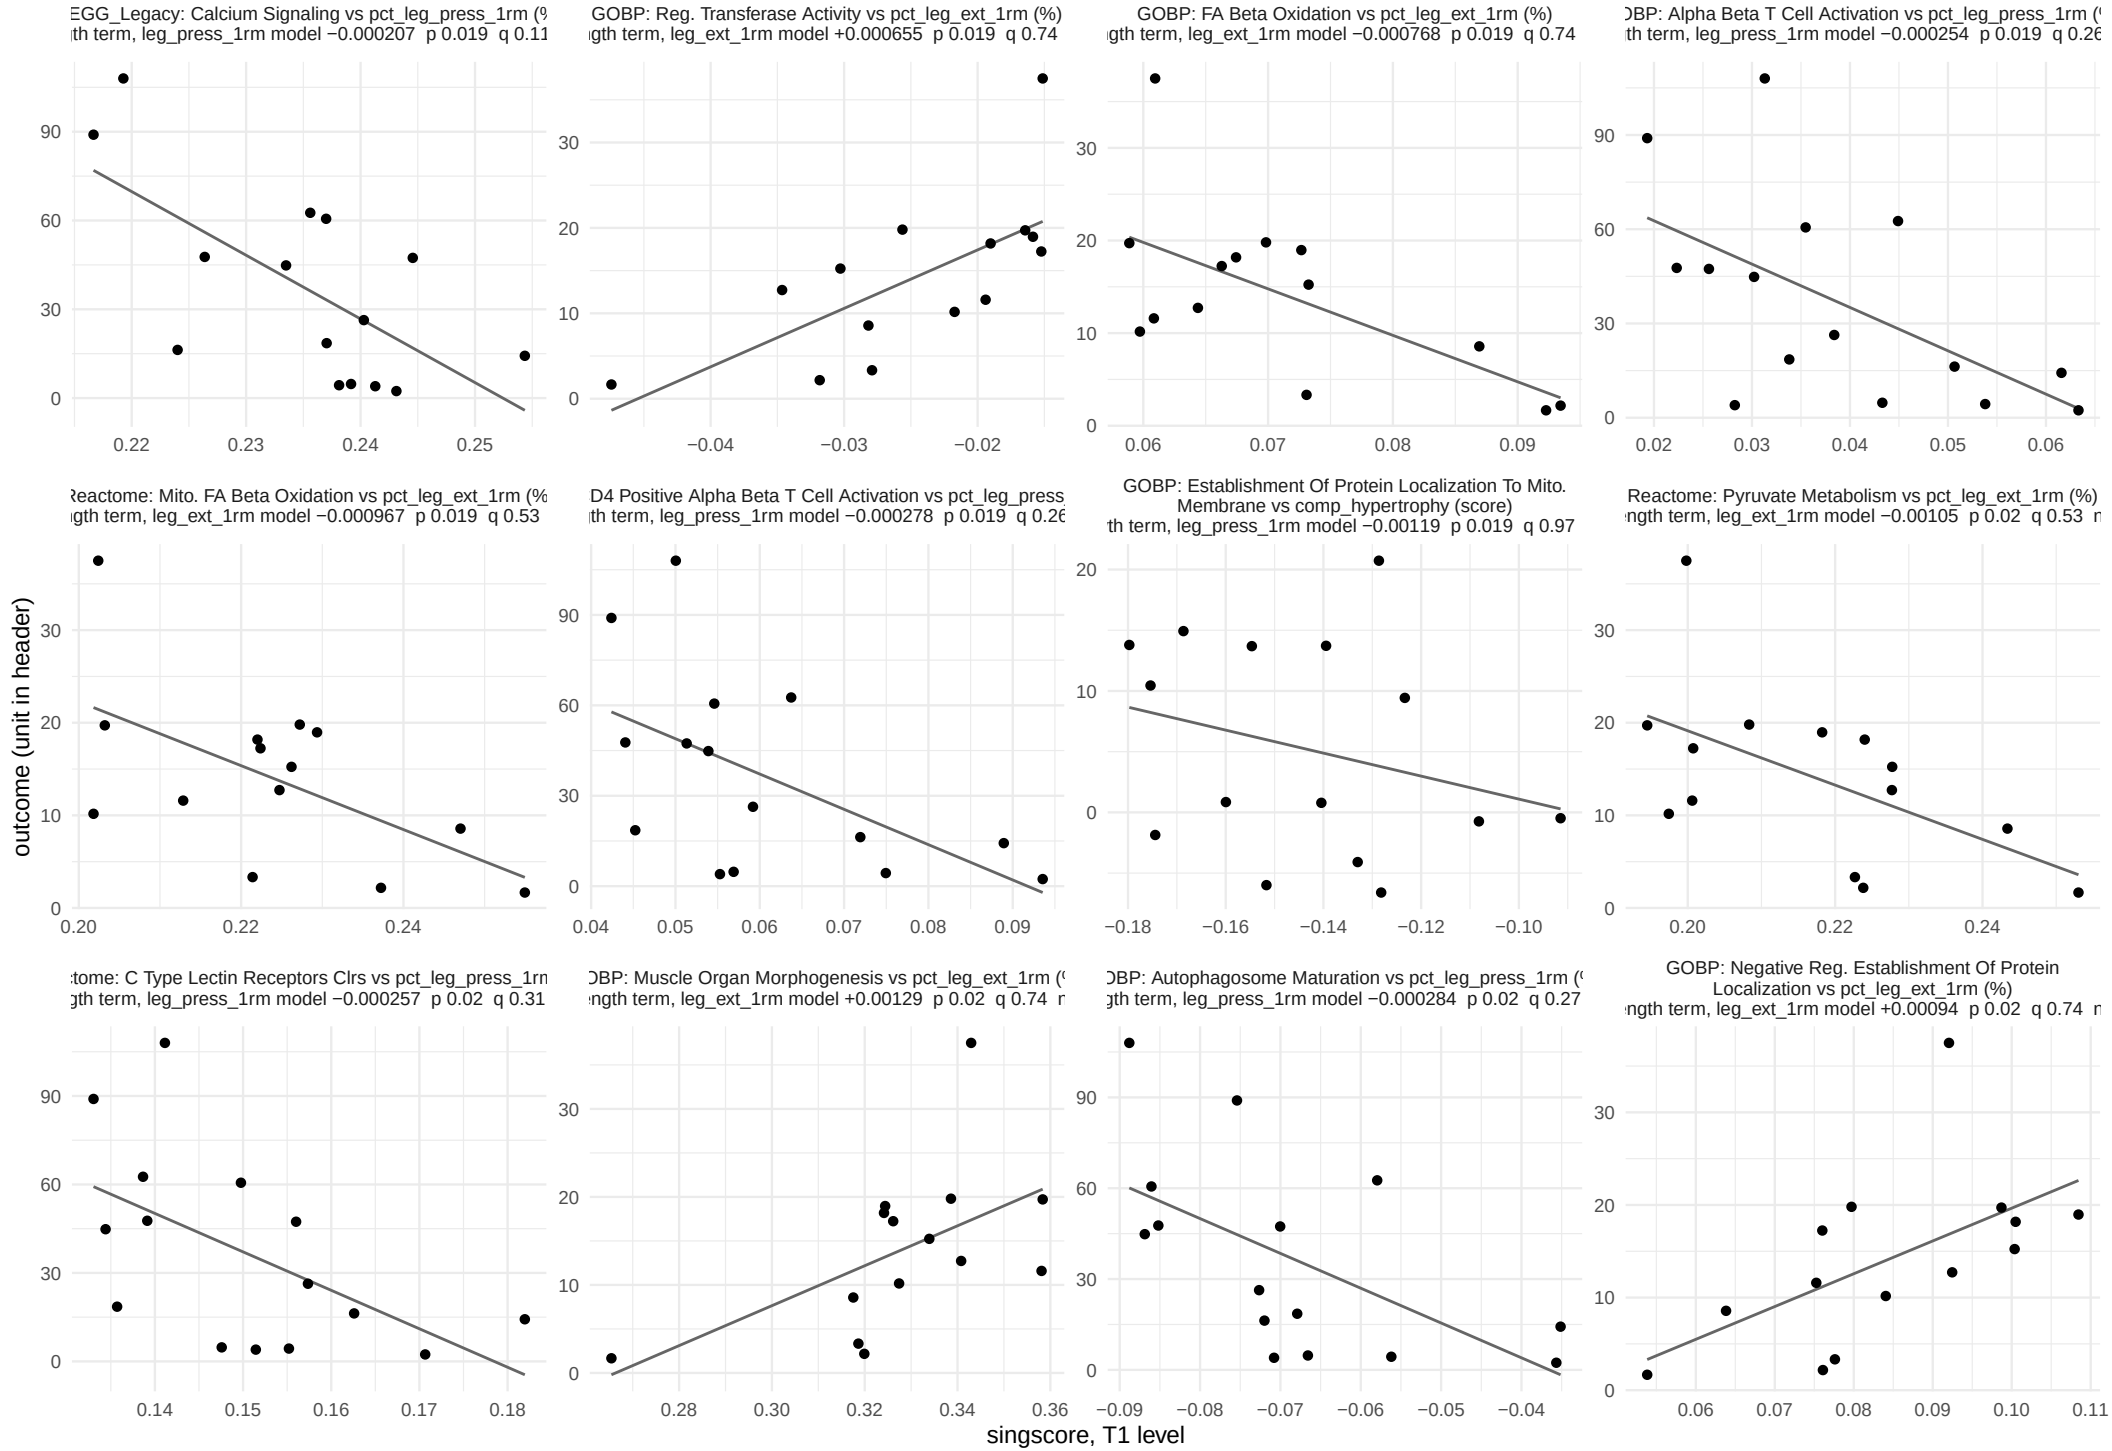

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/02_sets.xlsx, two_predictor.

Two predictor, baseline window


334 of 5512 feature−outcome pairs at p < 0.05, 7 at BH < 0.05. Page 13 of 28.

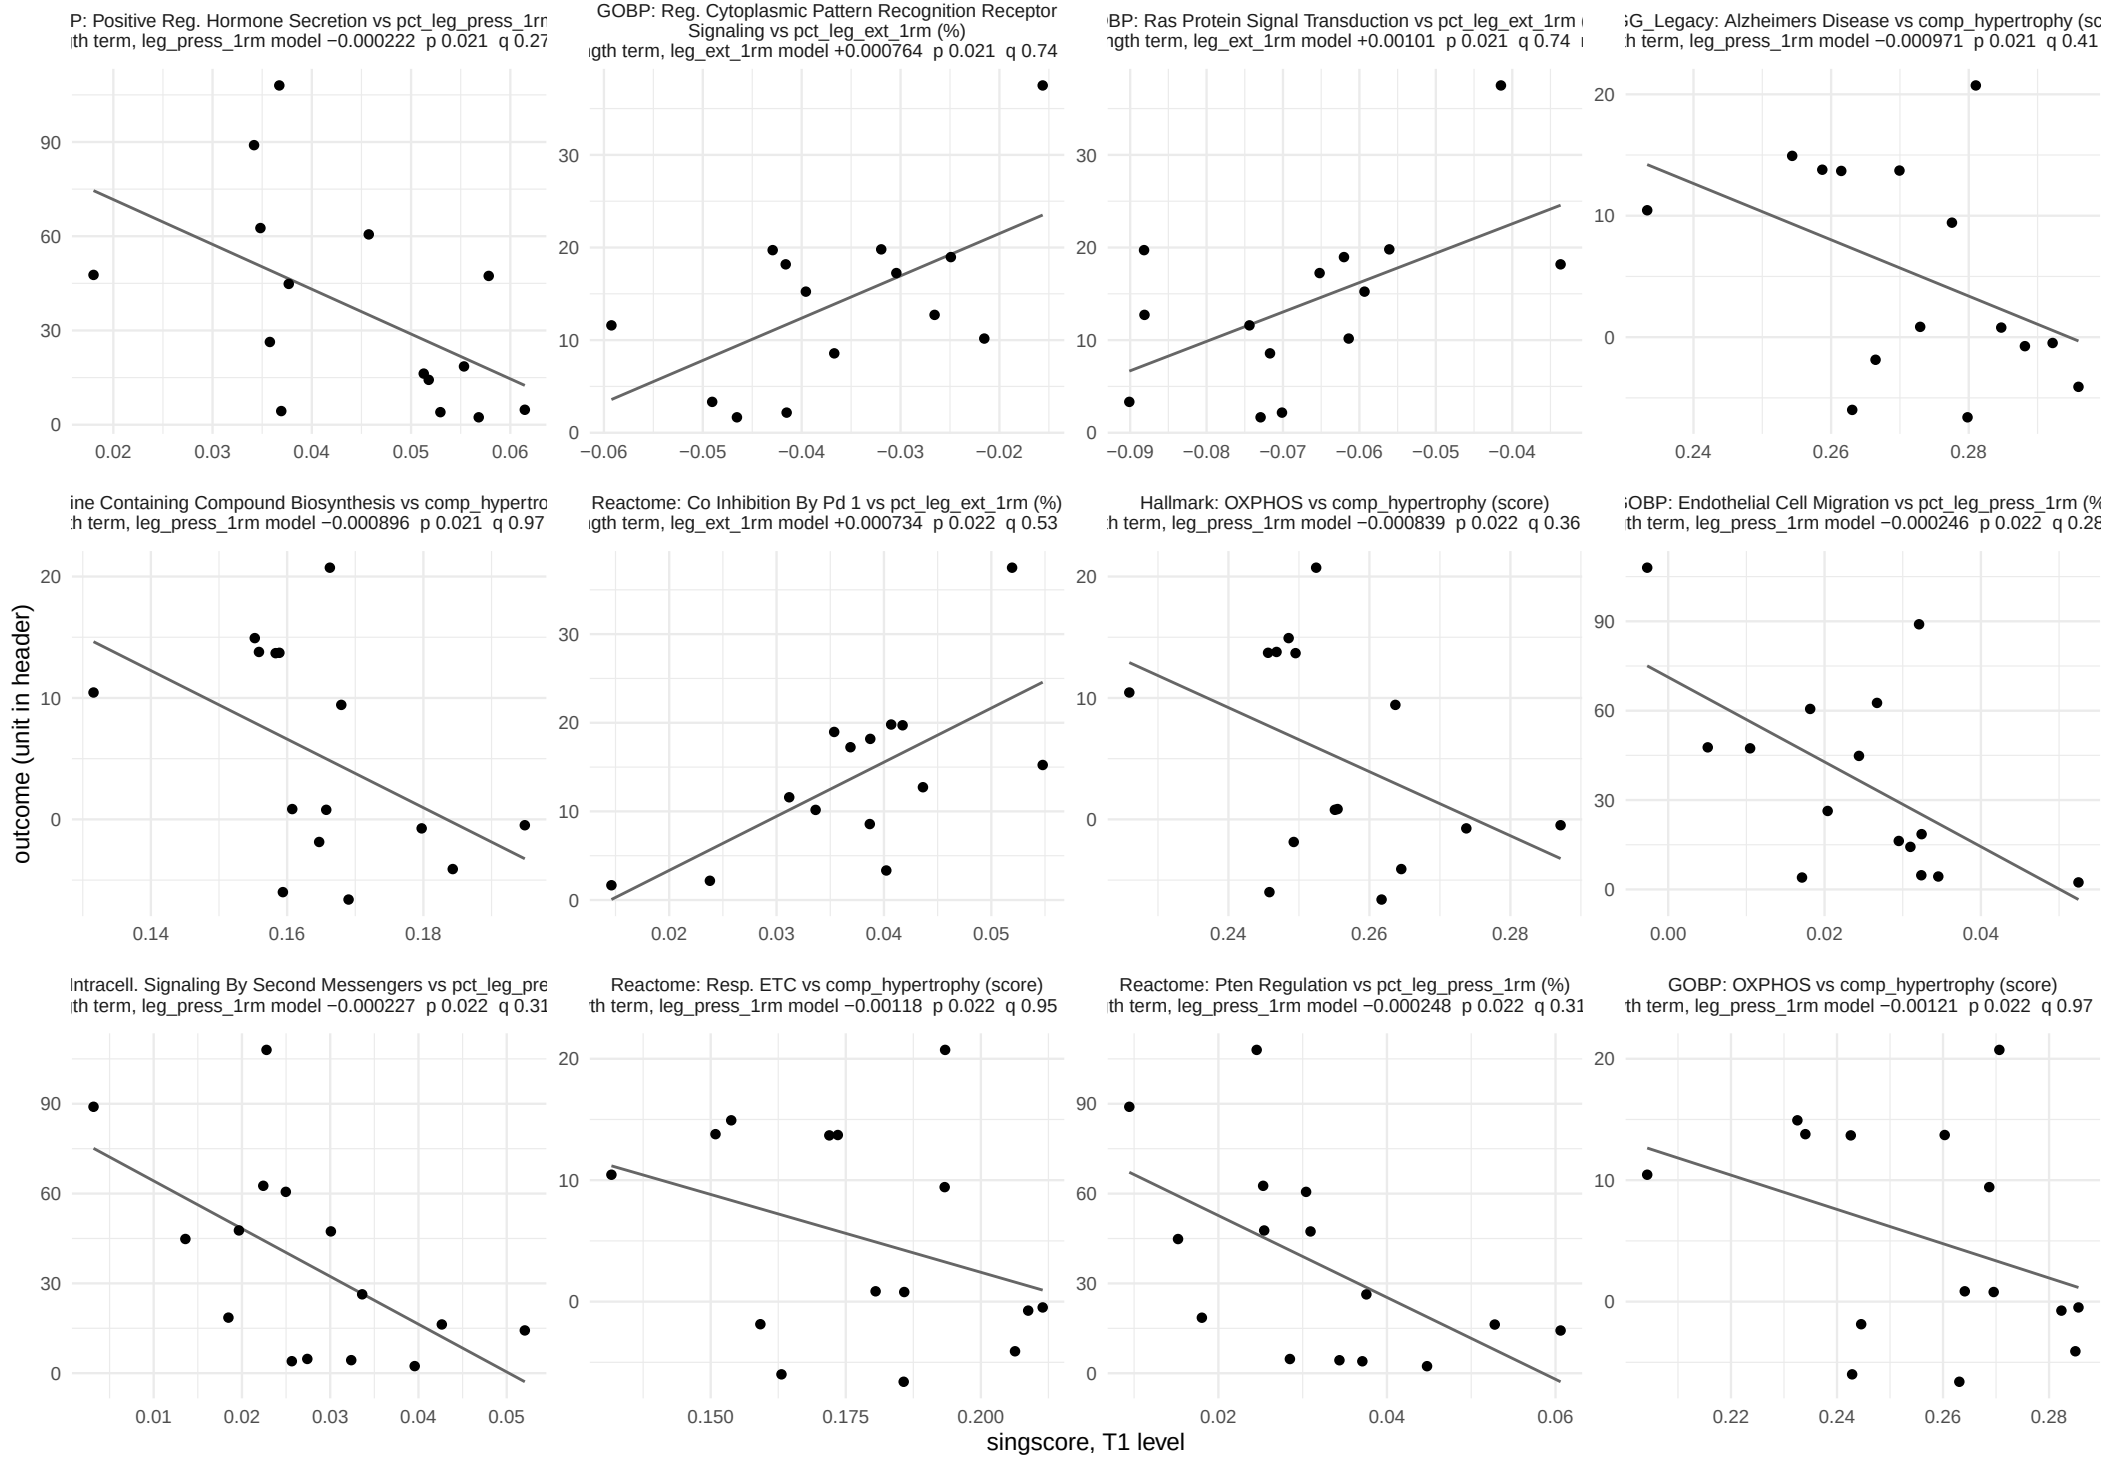

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/02_sets.xlsx, two_predictor.

Two predictor, baseline window


334 of 5512 feature−outcome pairs at p < 0.05, 7 at BH < 0.05. Page 14 of 28.

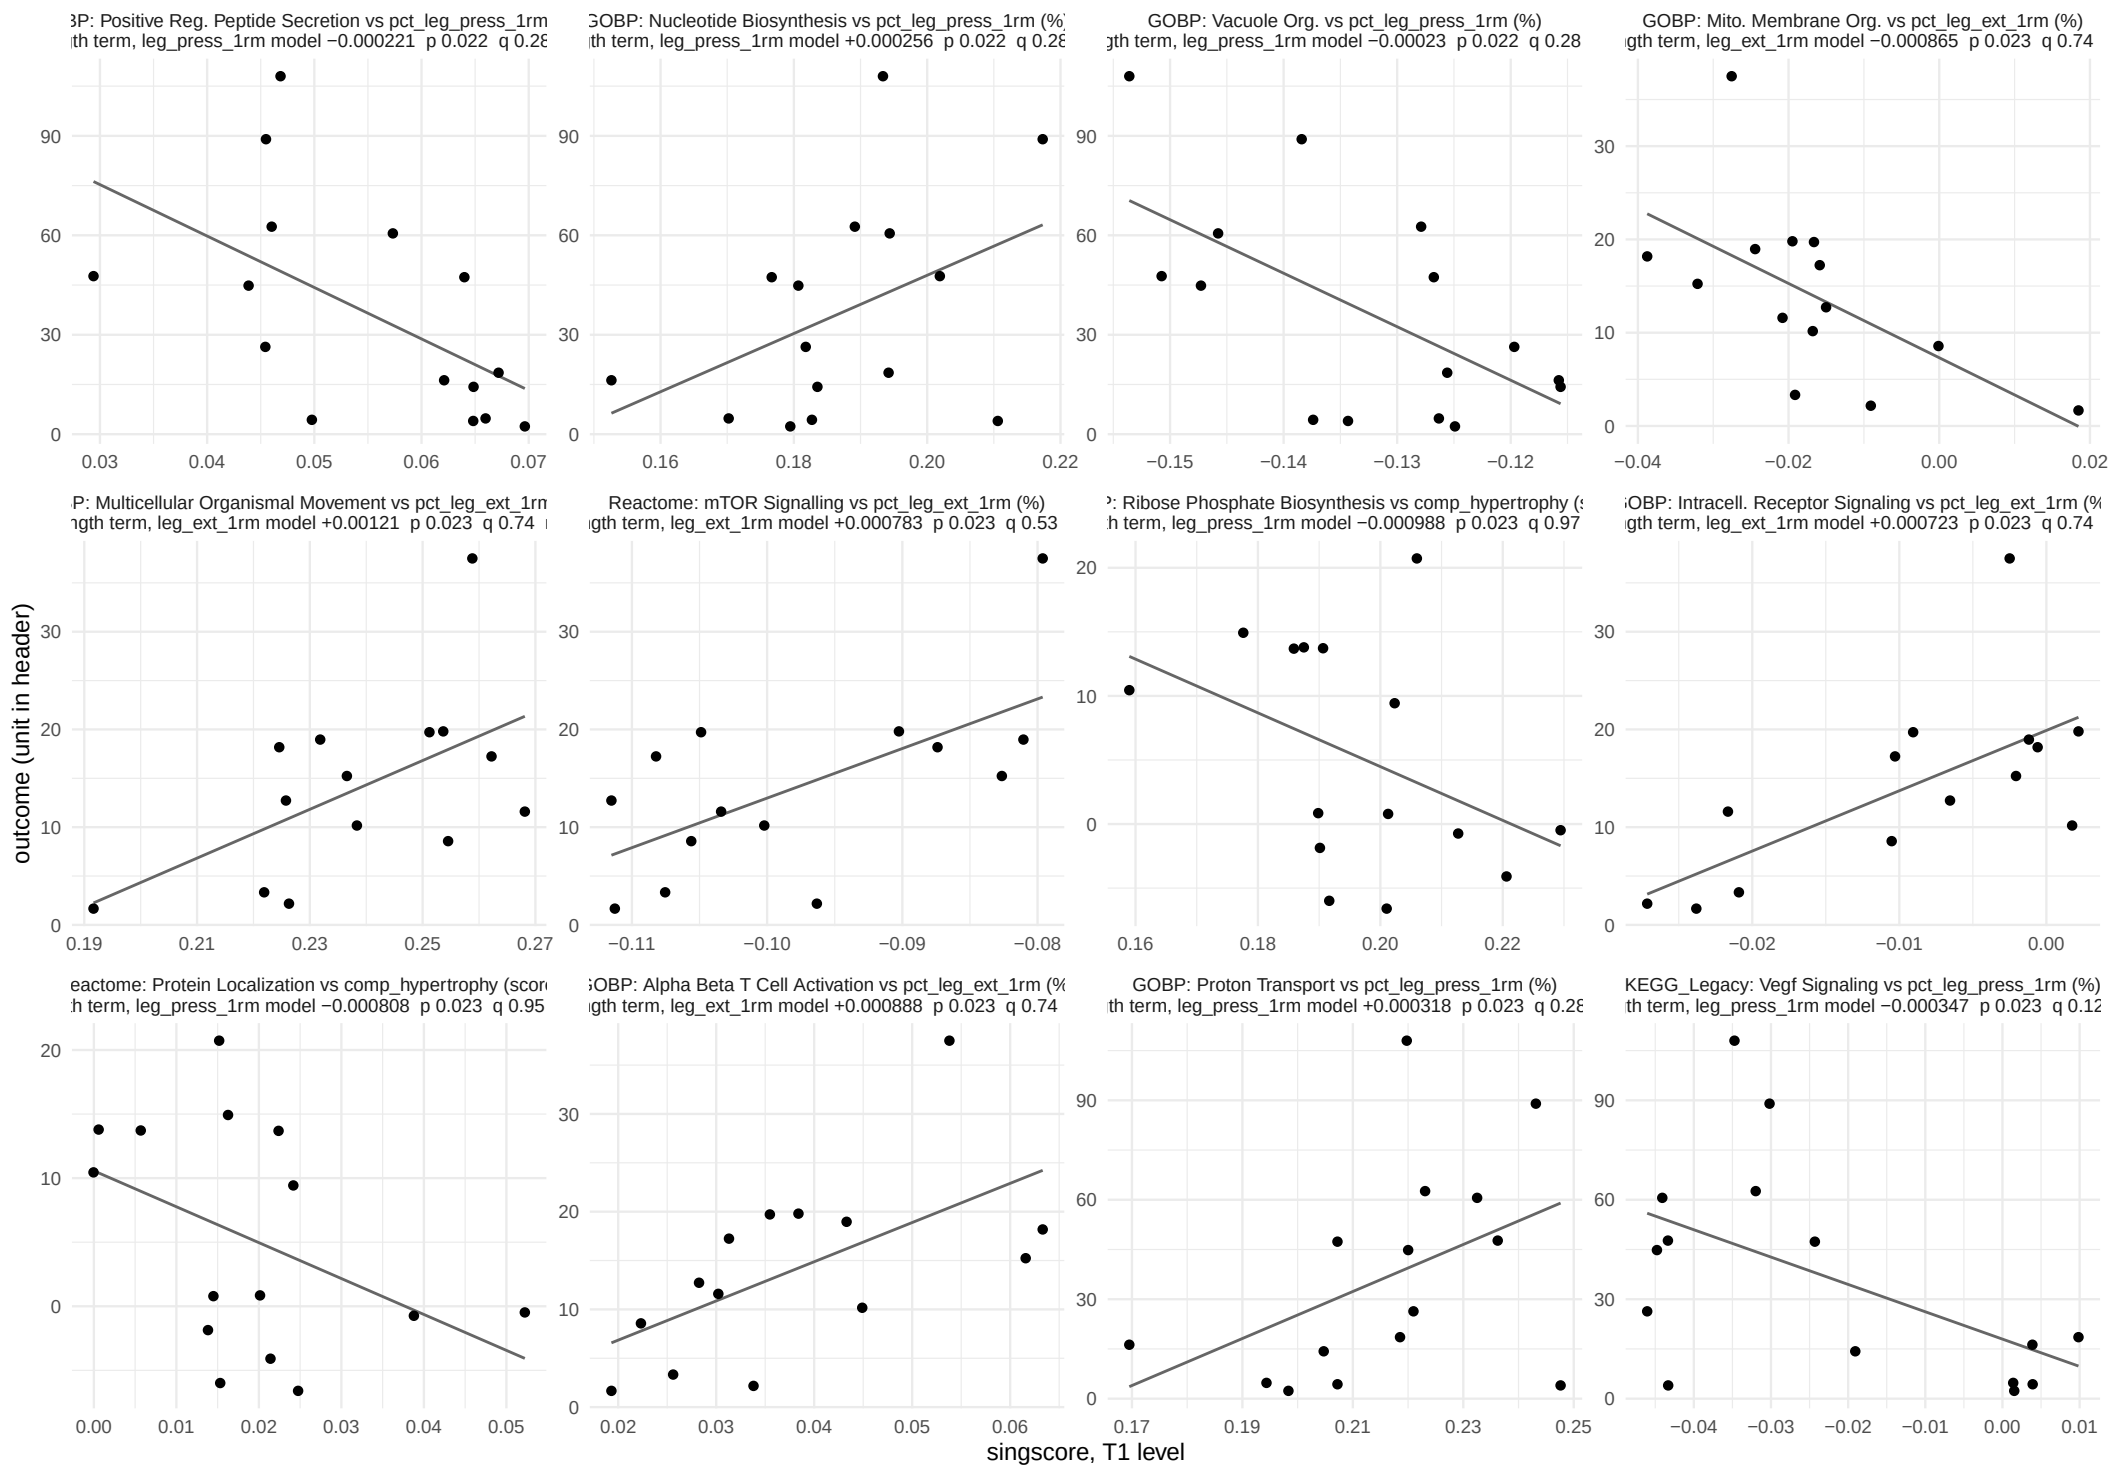

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/02_sets.xlsx, two_predictor.

Two predictor, baseline window


334 of 5512 feature−outcome pairs at p < 0.05, 7 at BH < 0.05. Page 15 of 28.

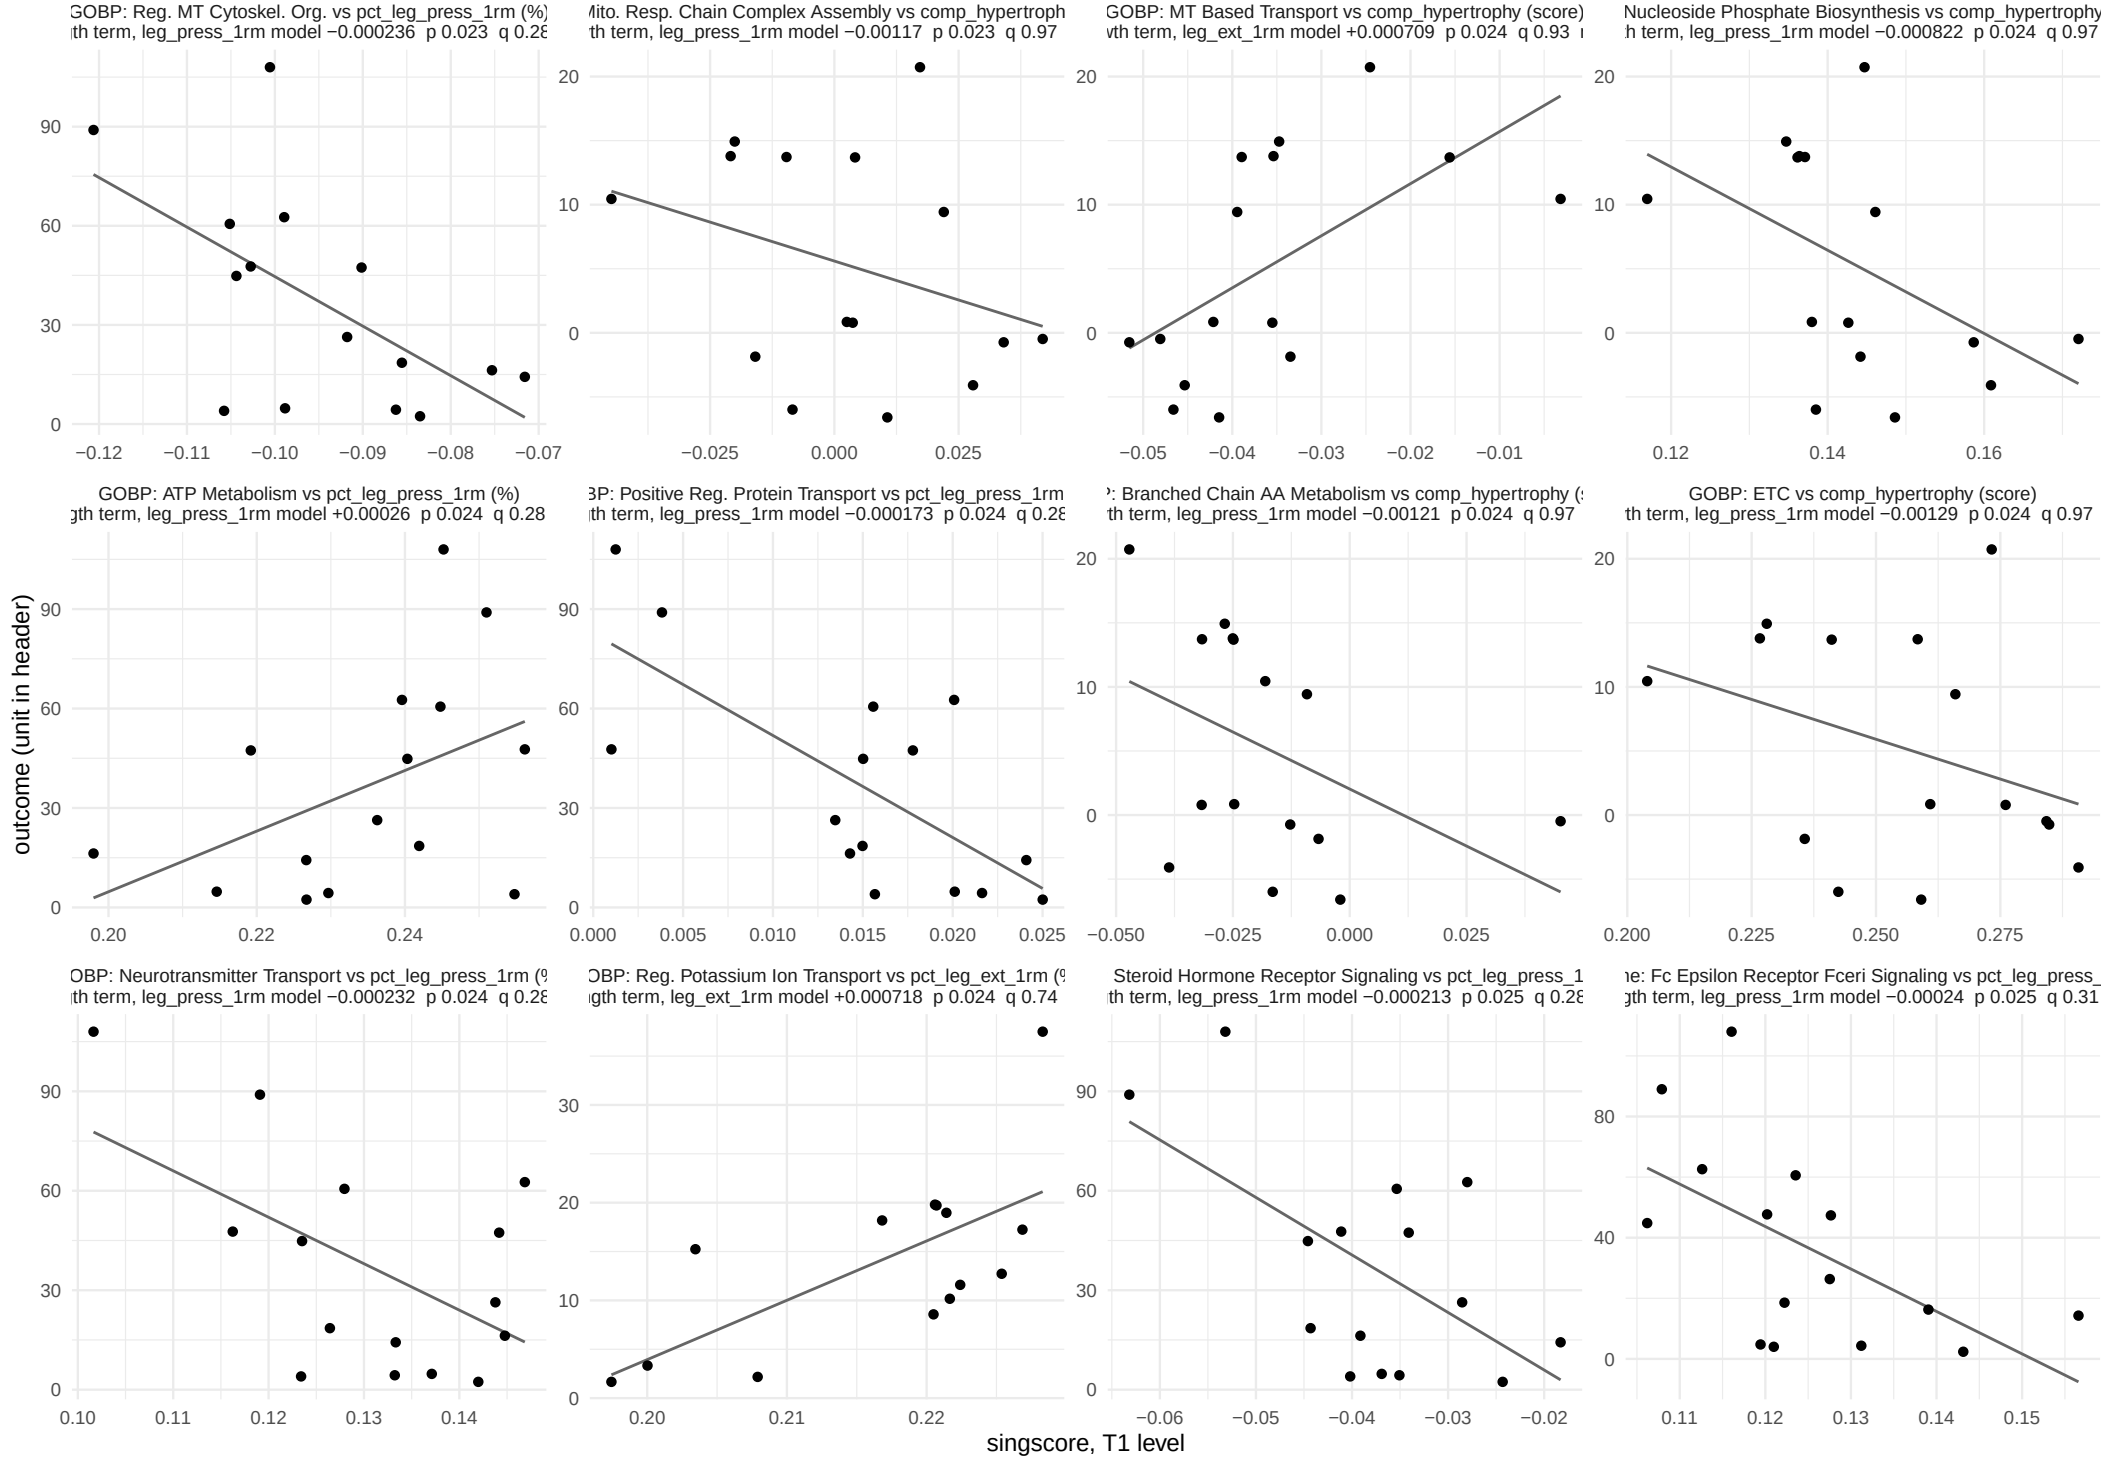

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/02_sets.xlsx, two_predictor.

Two predictor, baseline window


334 of 5512 feature−outcome pairs at p < 0.05, 7 at BH < 0.05. Page 16 of 28.

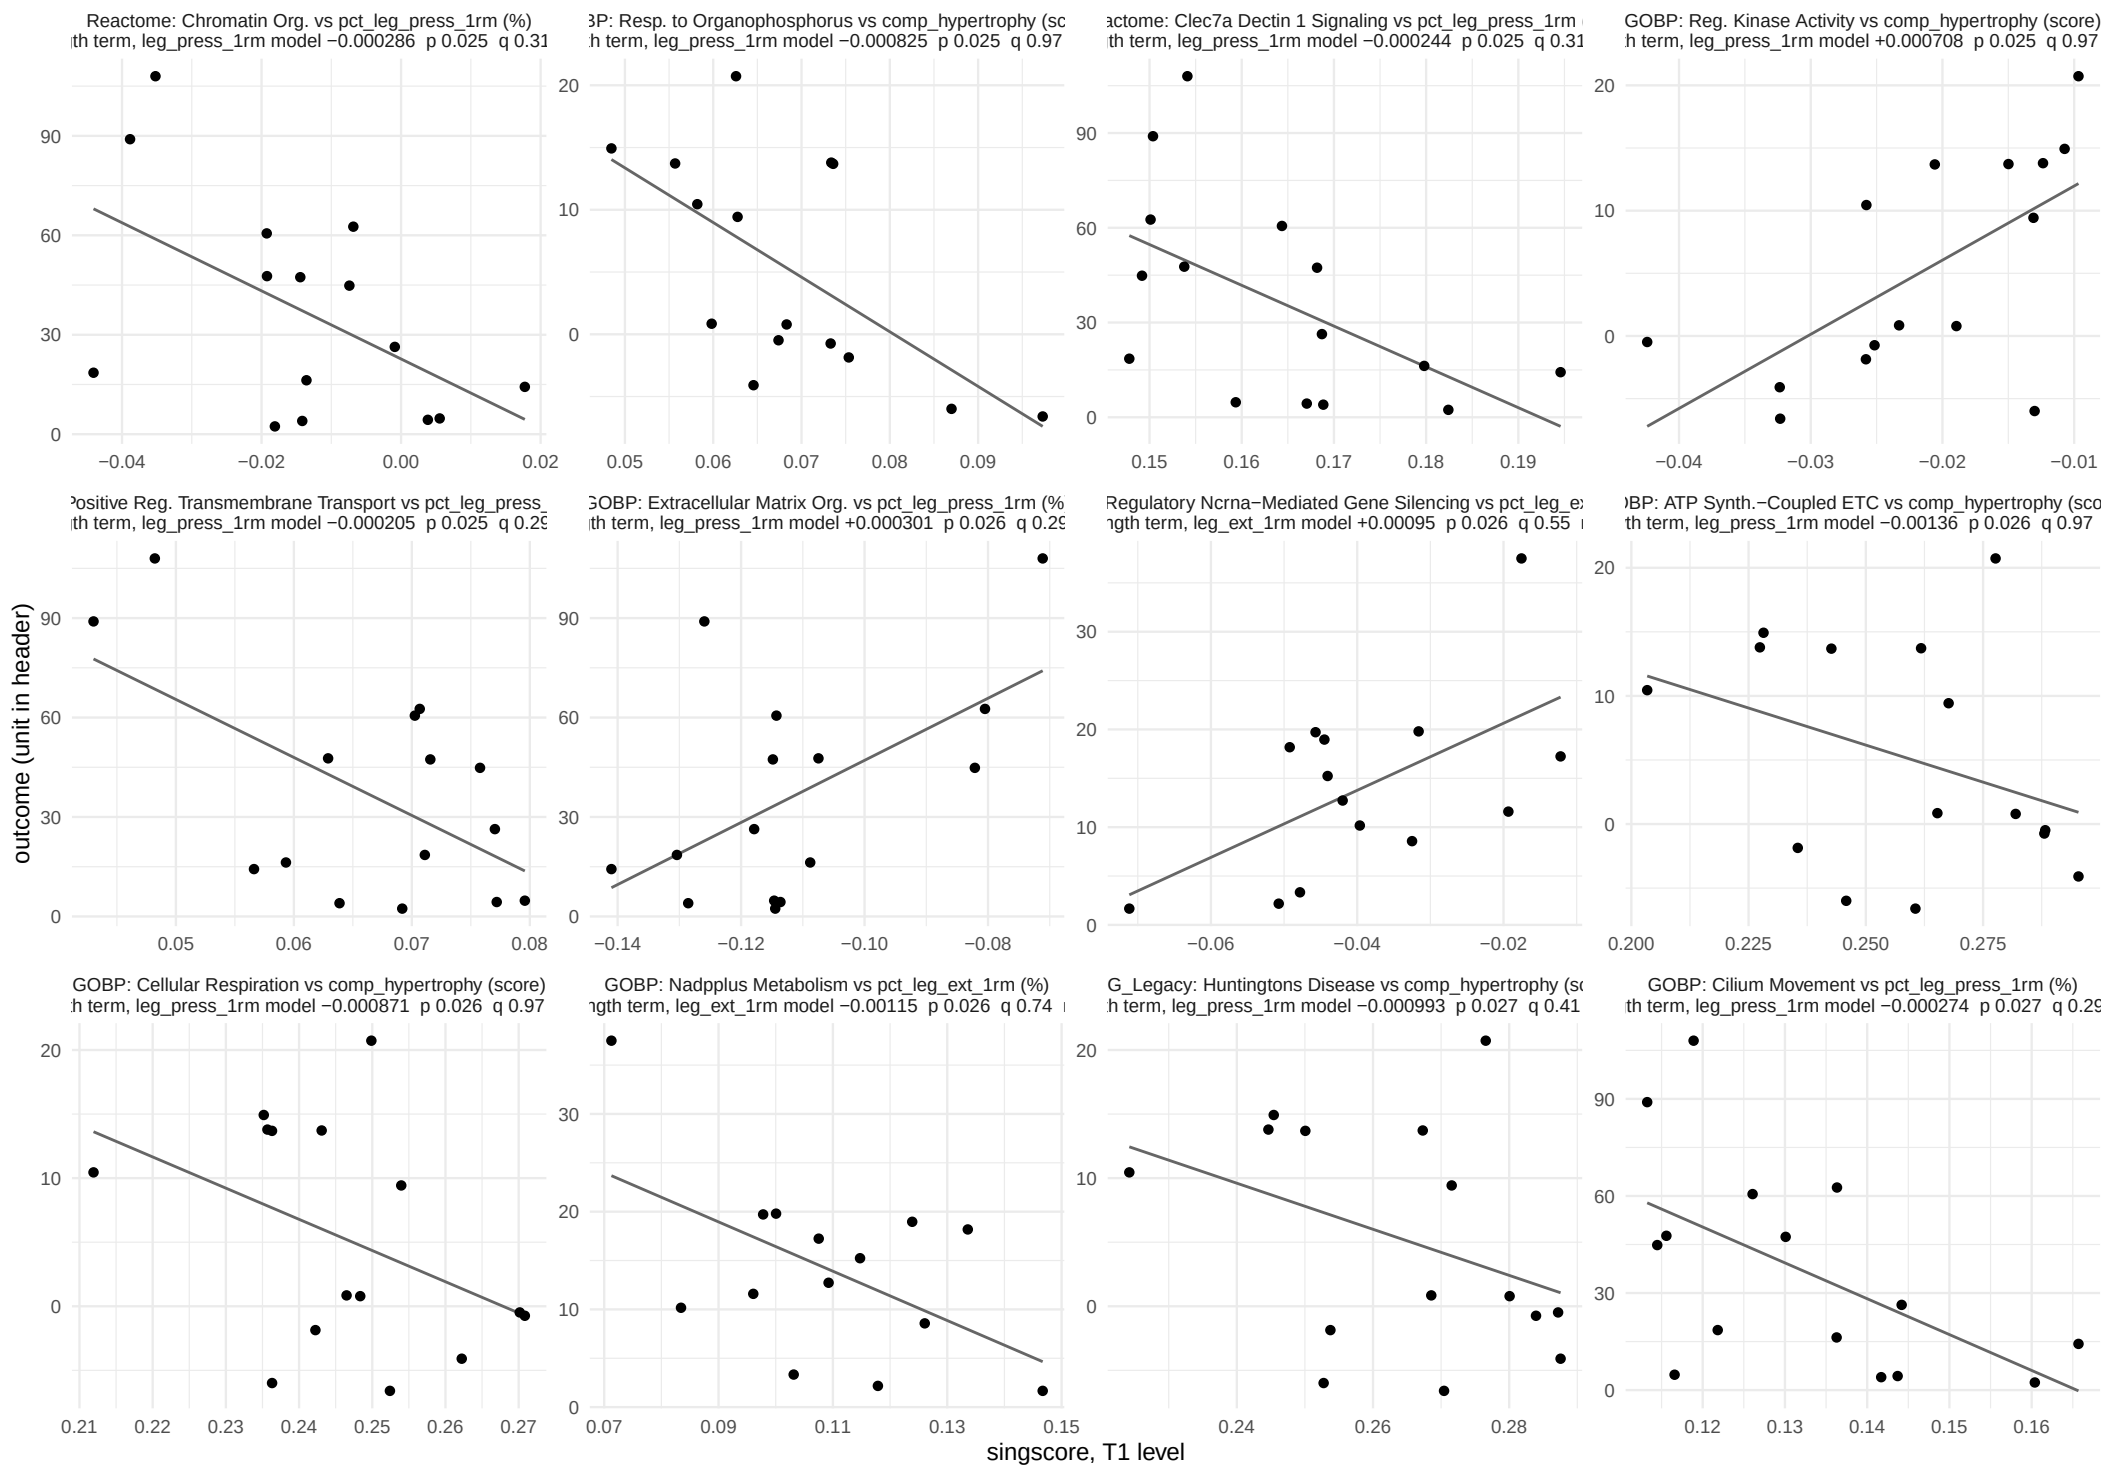

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/02_sets.xlsx, two_predictor.

Two predictor, baseline window


334 of 5512 feature−outcome pairs at p < 0.05, 7 at BH < 0.05. Page 17 of 28.

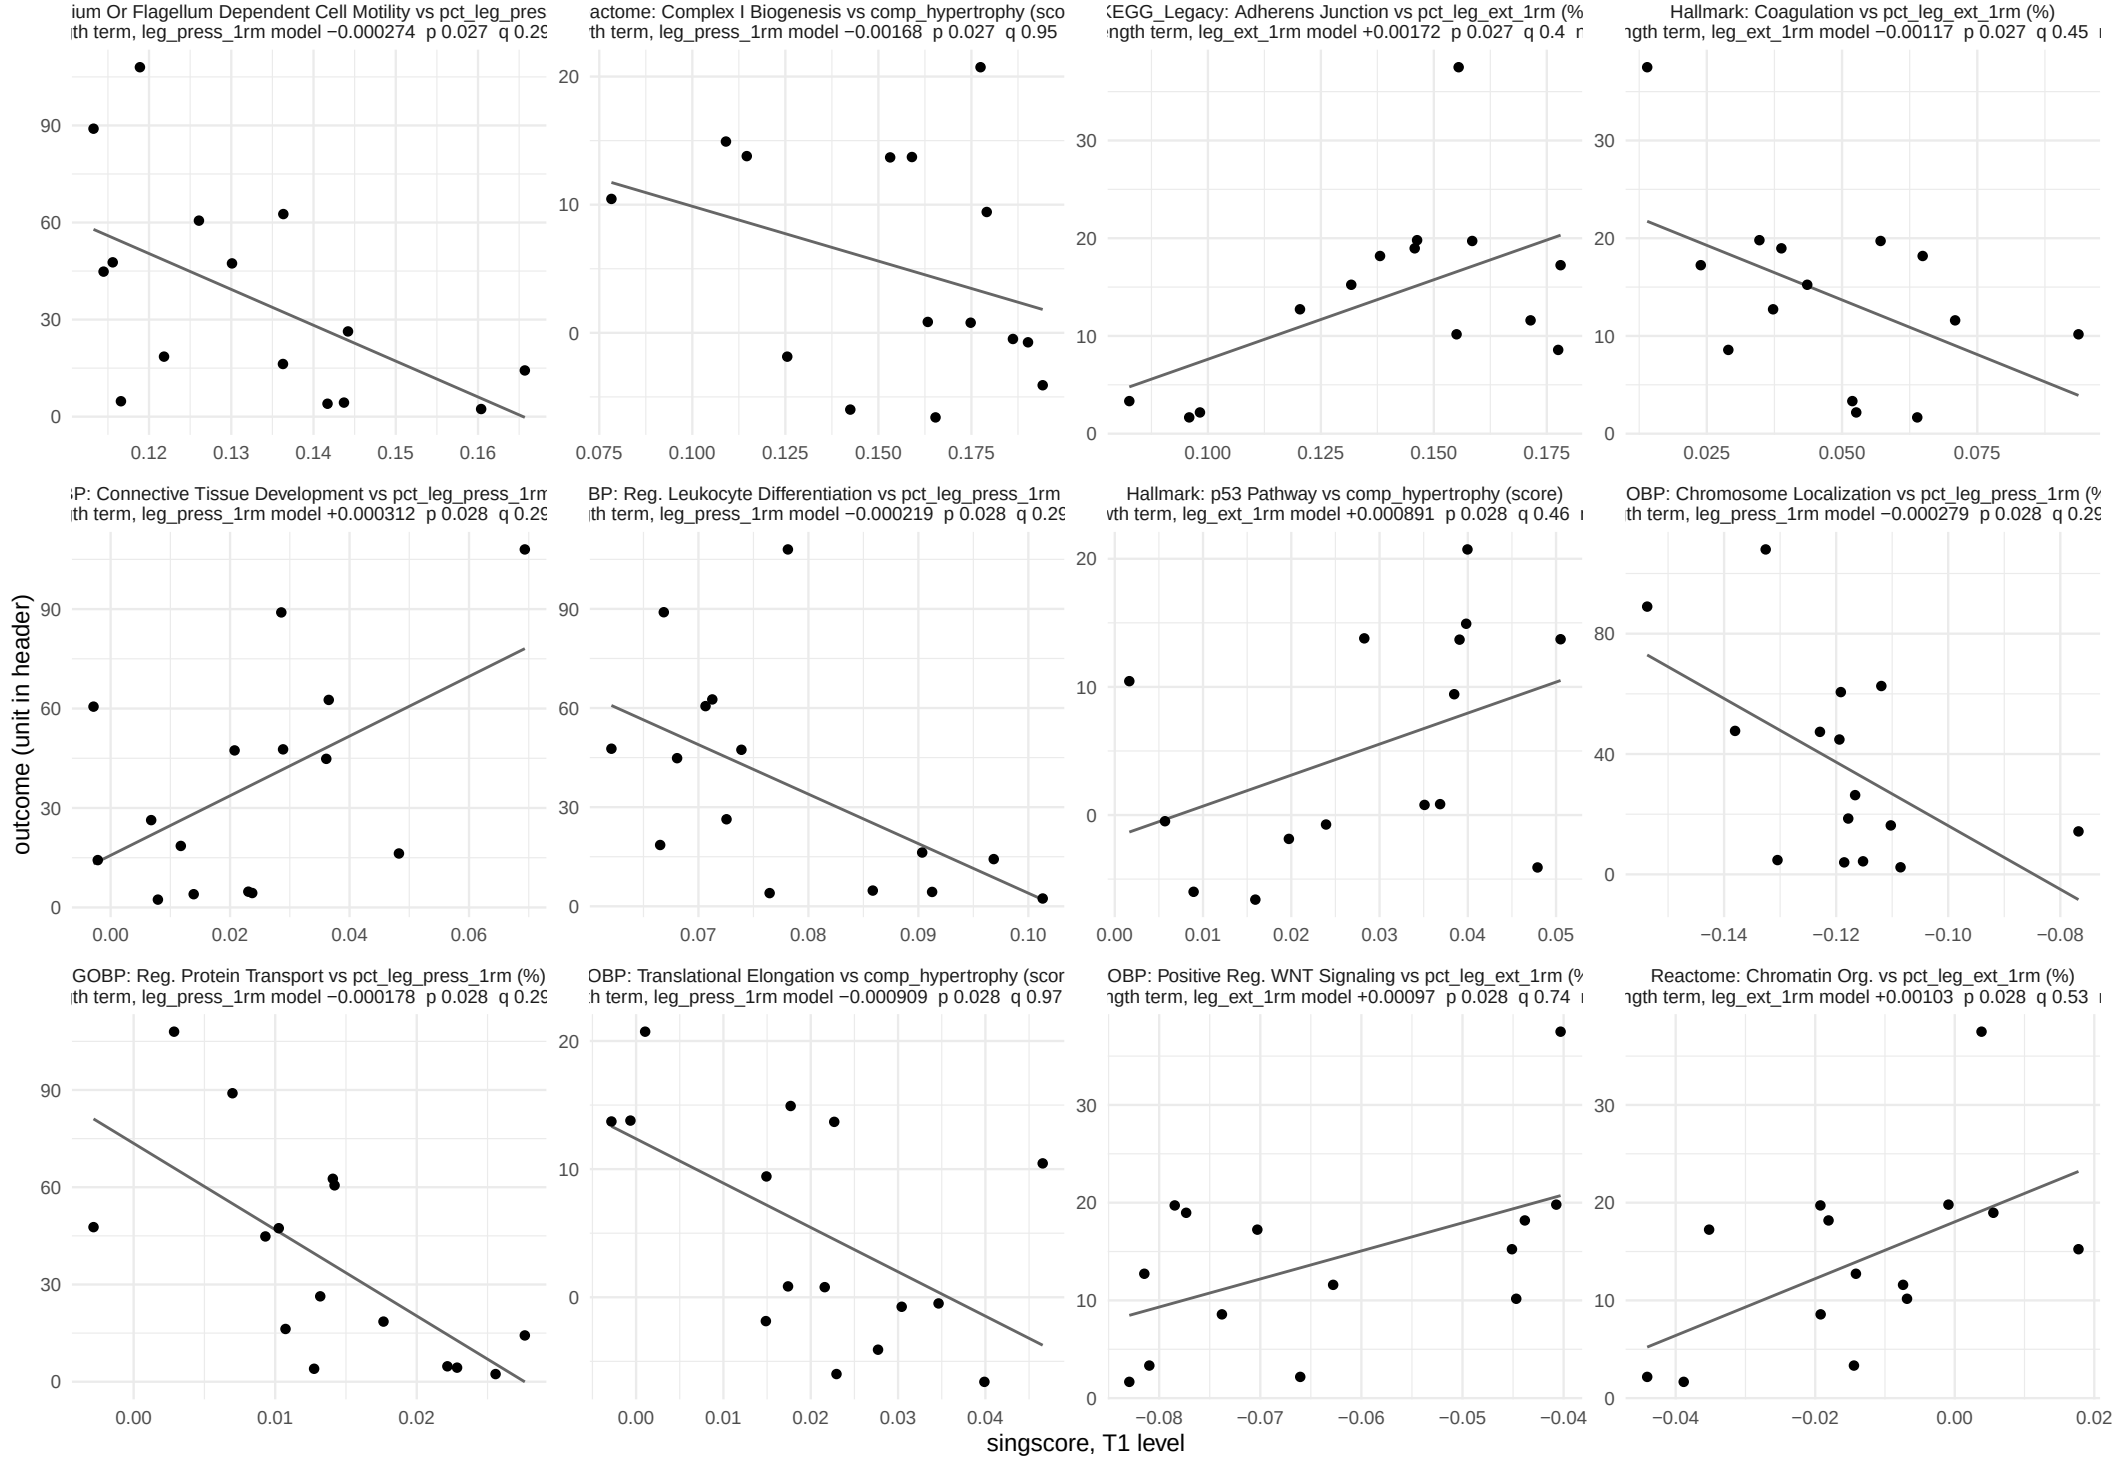

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/02_sets.xlsx, two_predictor.

Two predictor, baseline window


334 of 5512 feature−outcome pairs at p < 0.05, 7 at BH < 0.05. Page 18 of 28.

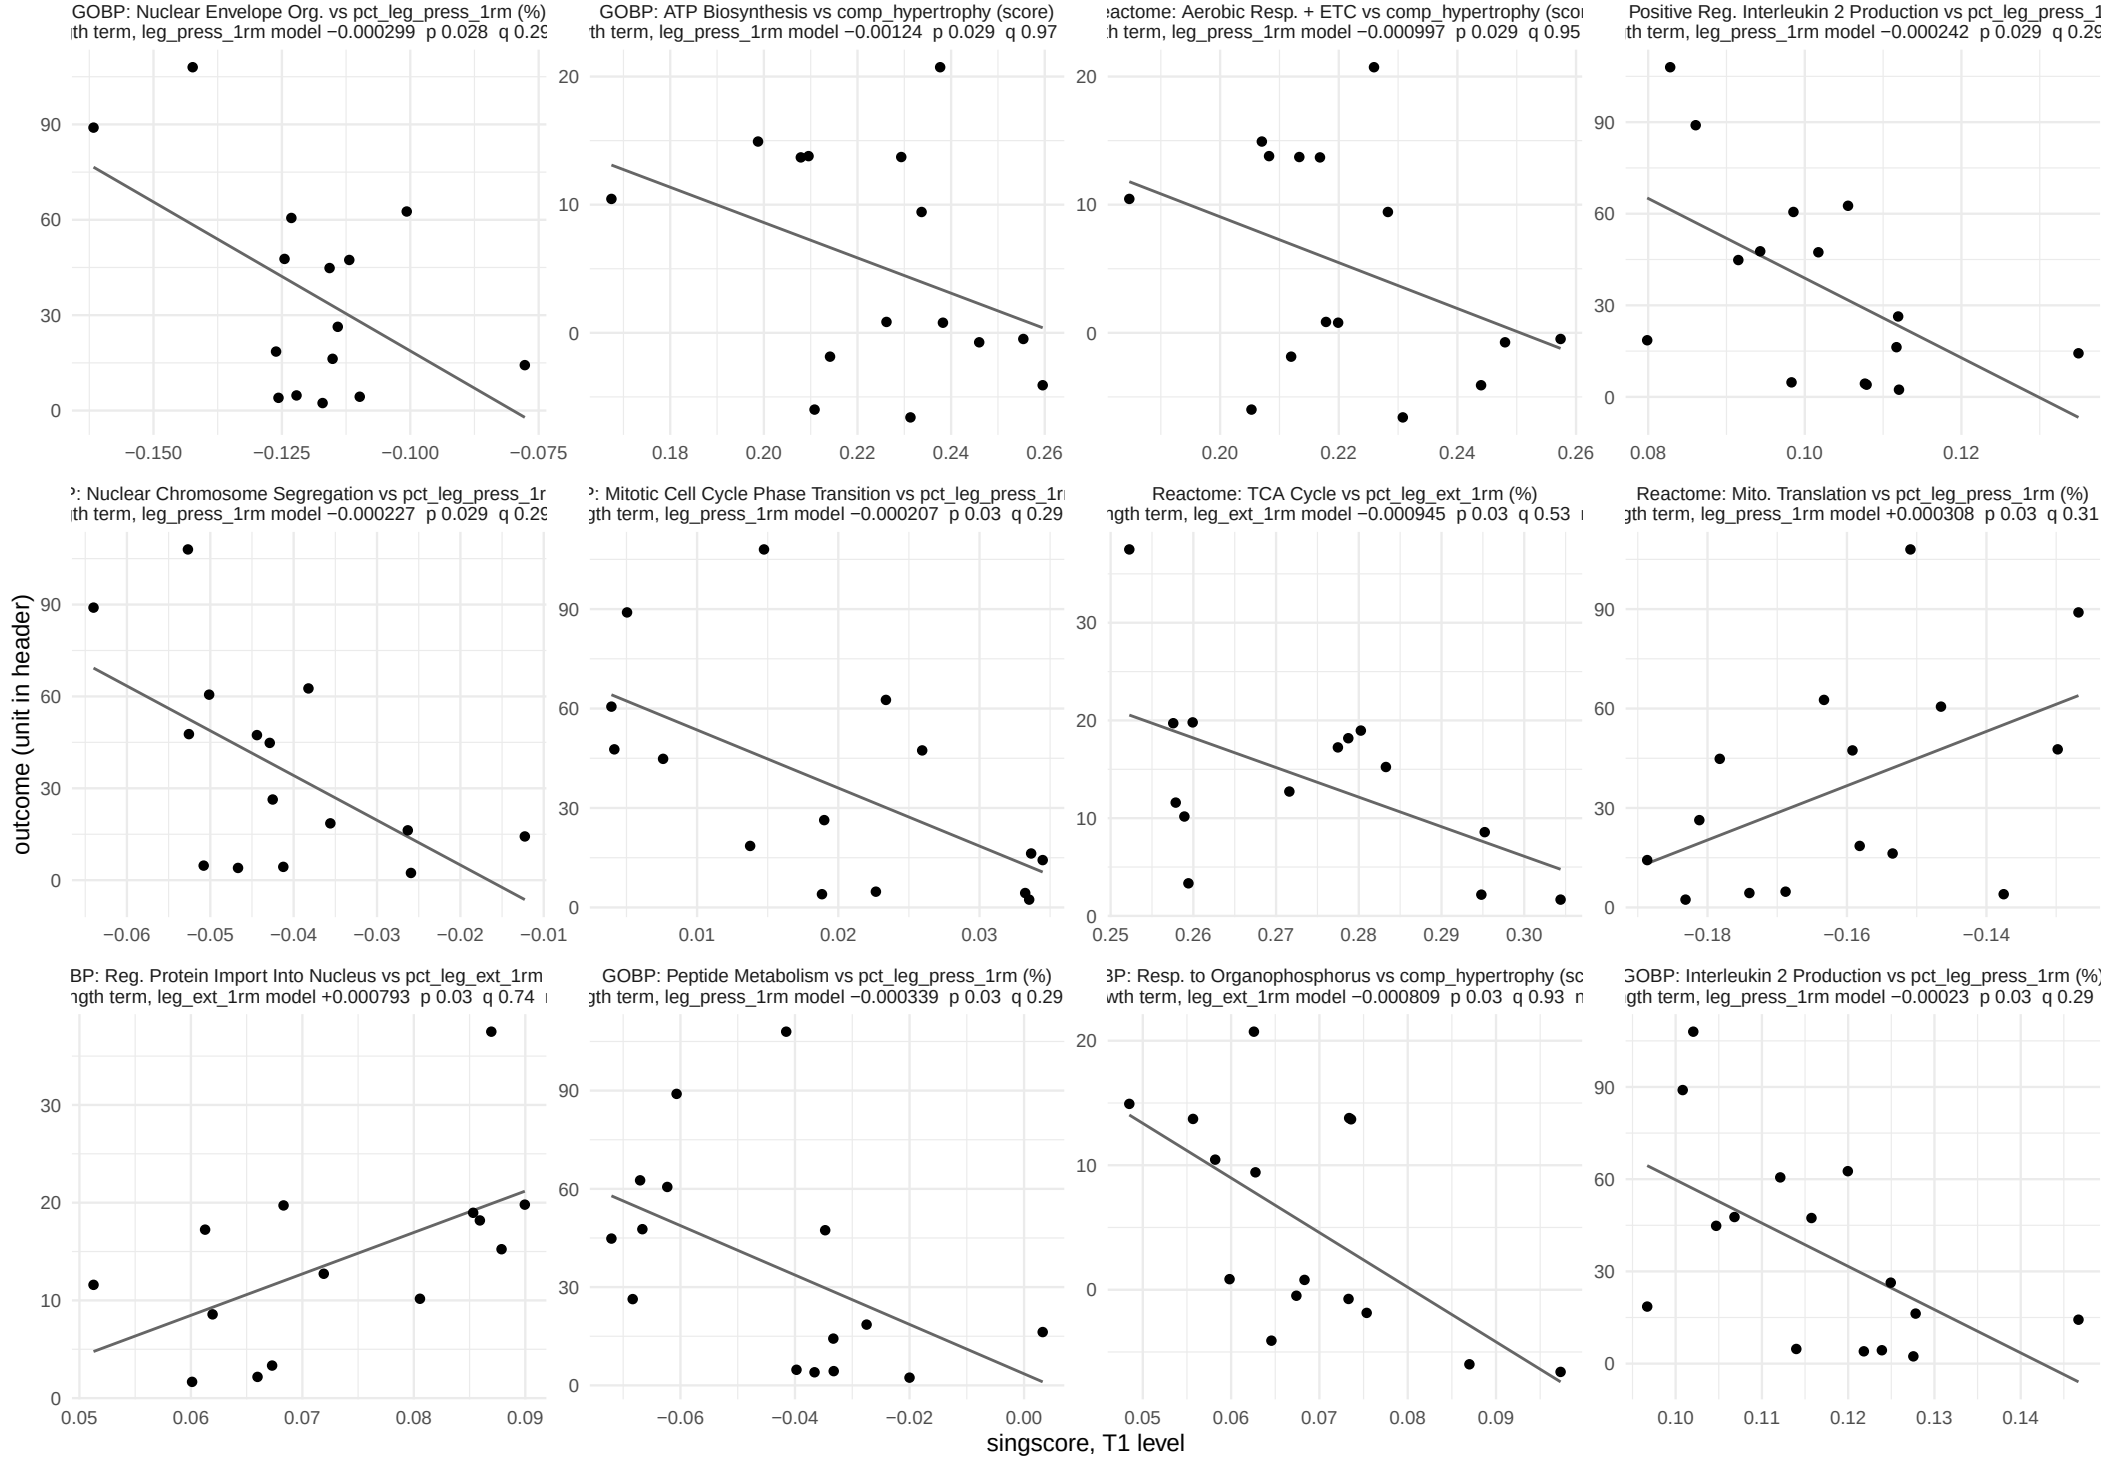

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/02_sets.xlsx, two_predictor.

Two predictor, baseline window


334 of 5512 feature−outcome pairs at p < 0.05, 7 at BH < 0.05. Page 19 of 28.

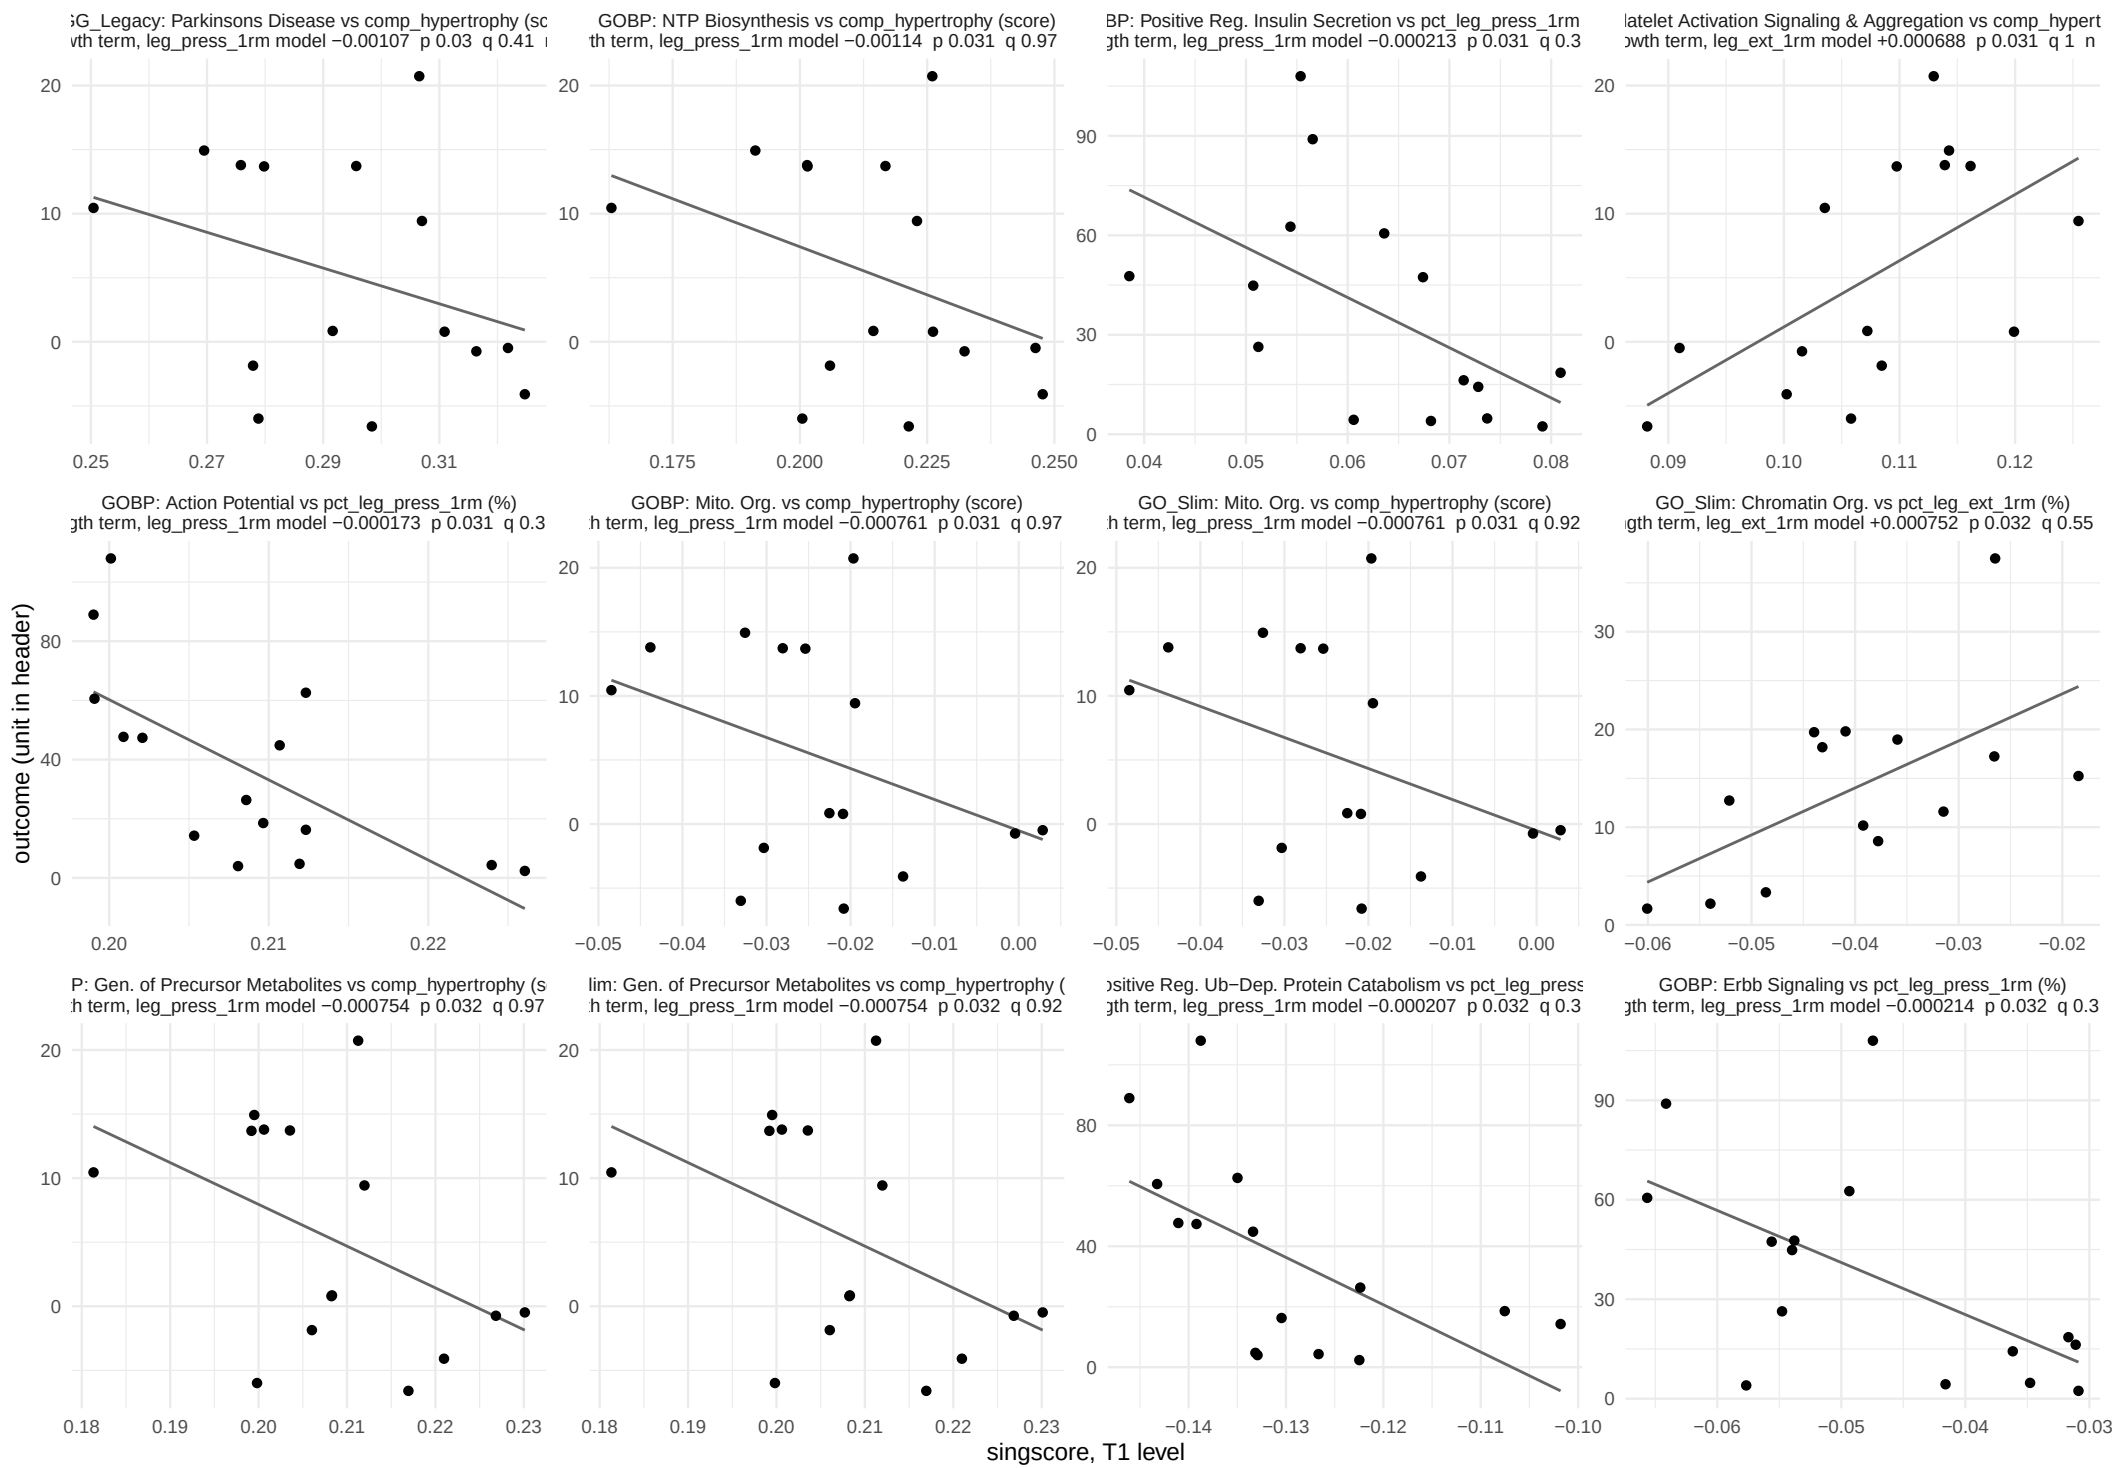

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/02_sets.xlsx, two_predictor.

Two predictor, baseline window


334 of 5512 feature−outcome pairs at p < 0.05, 7 at BH < 0.05. Page 20 of 28.

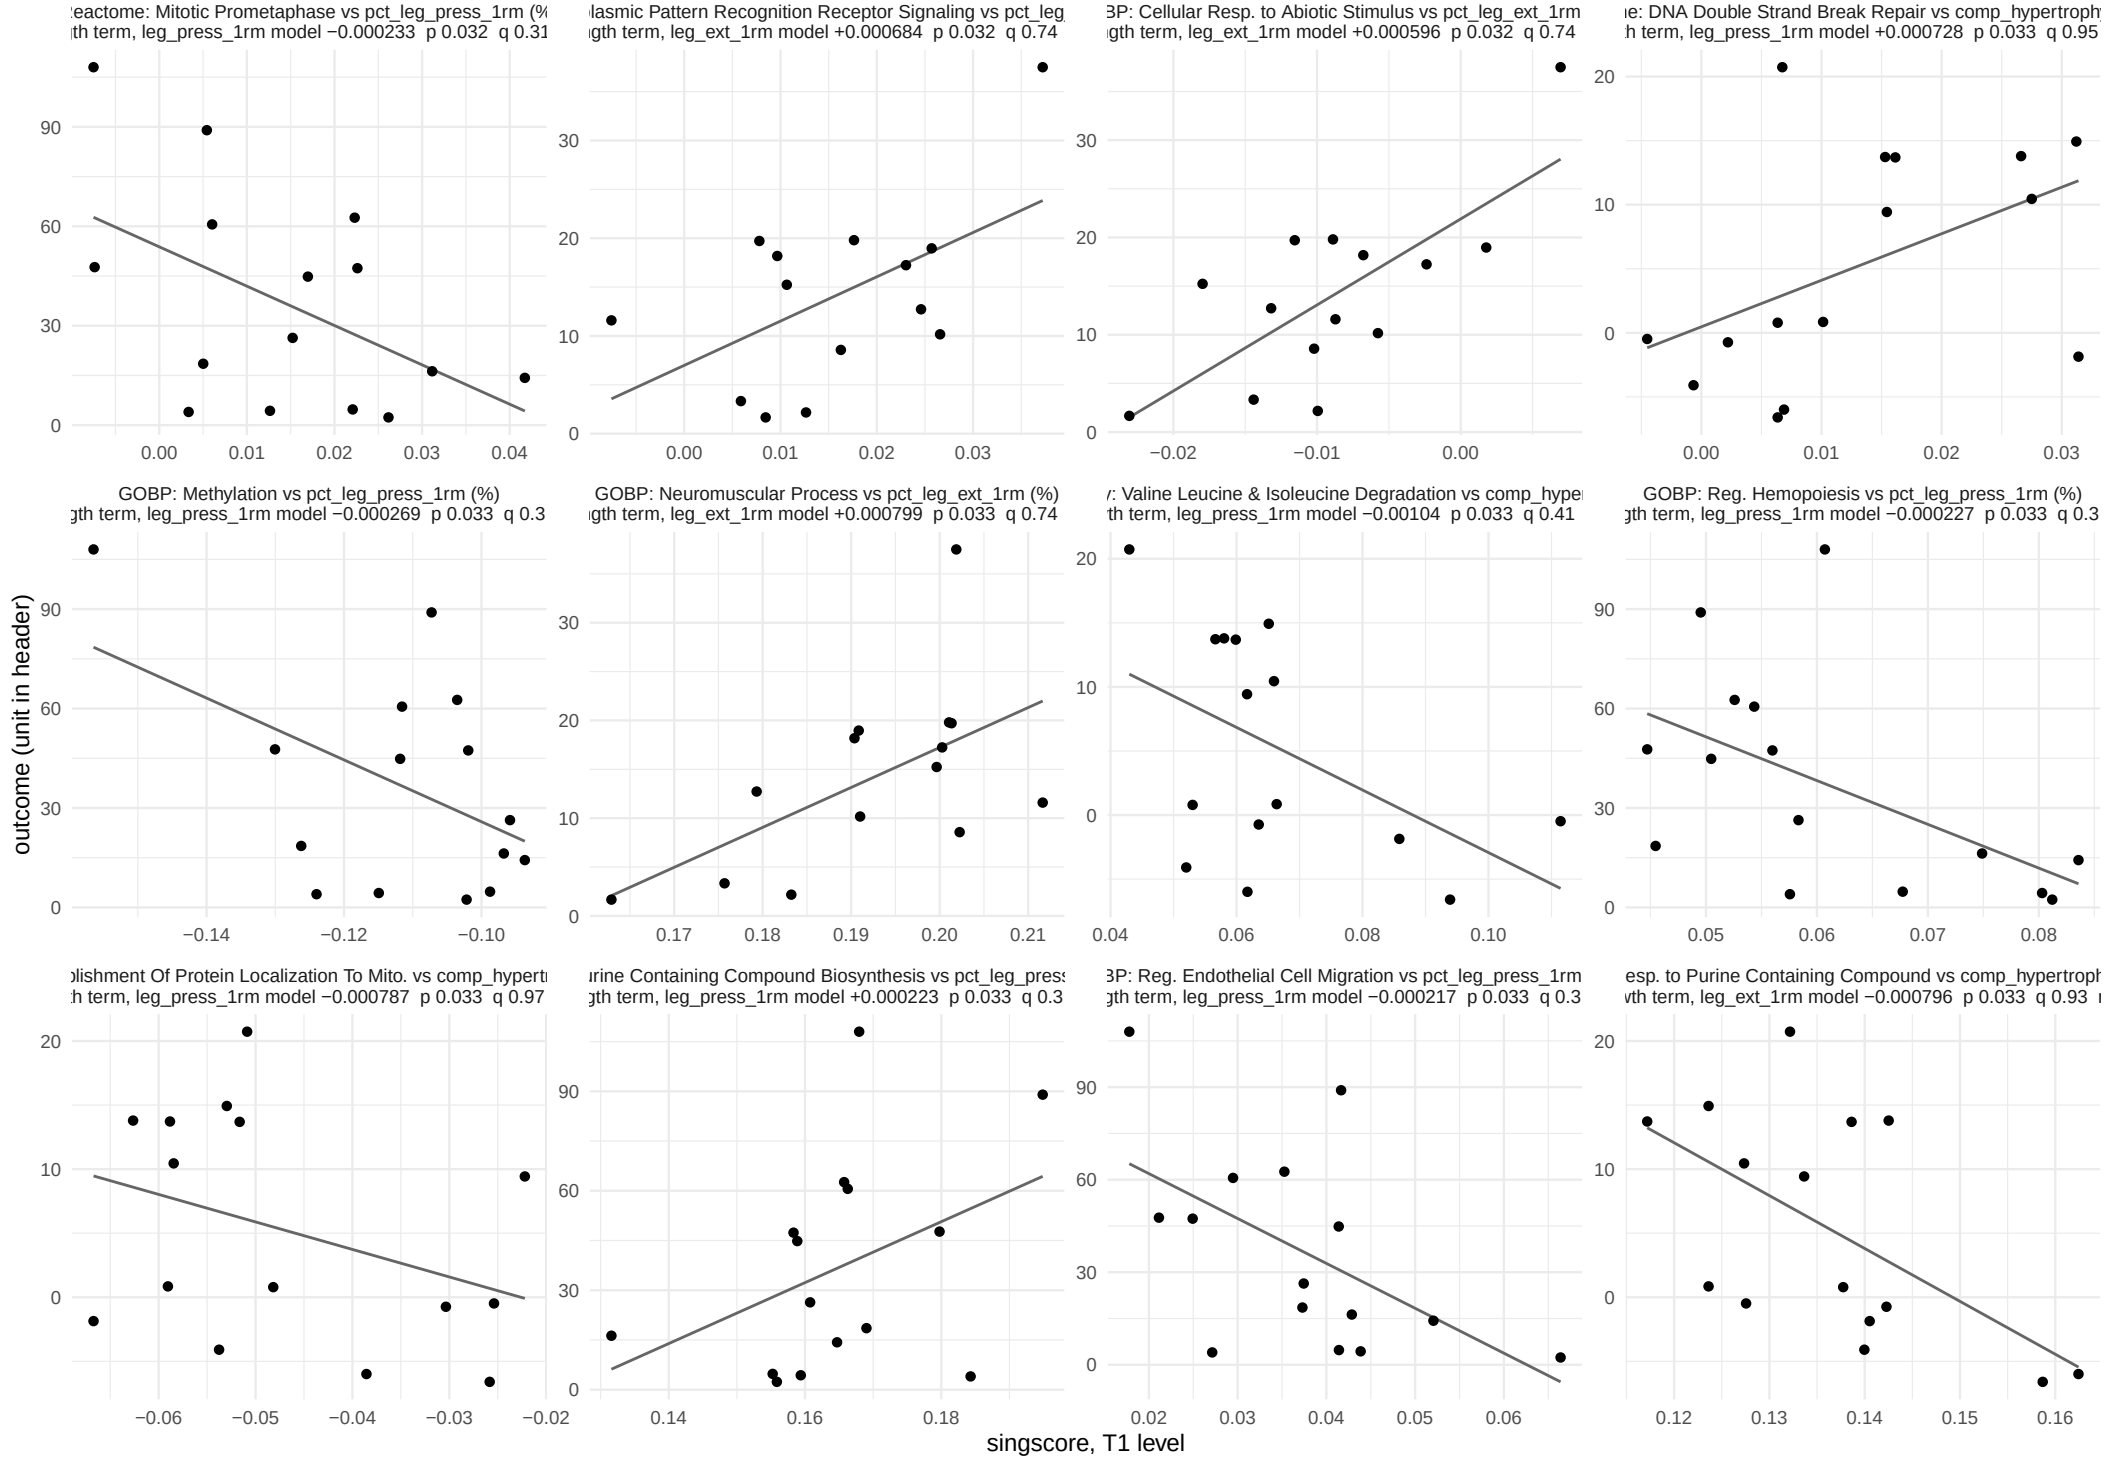

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/02_sets.xlsx, two_predictor.

Two predictor, baseline window


334 of 5512 feature−outcome pairs at p < 0.05, 7 at BH < 0.05. Page 21 of 28.

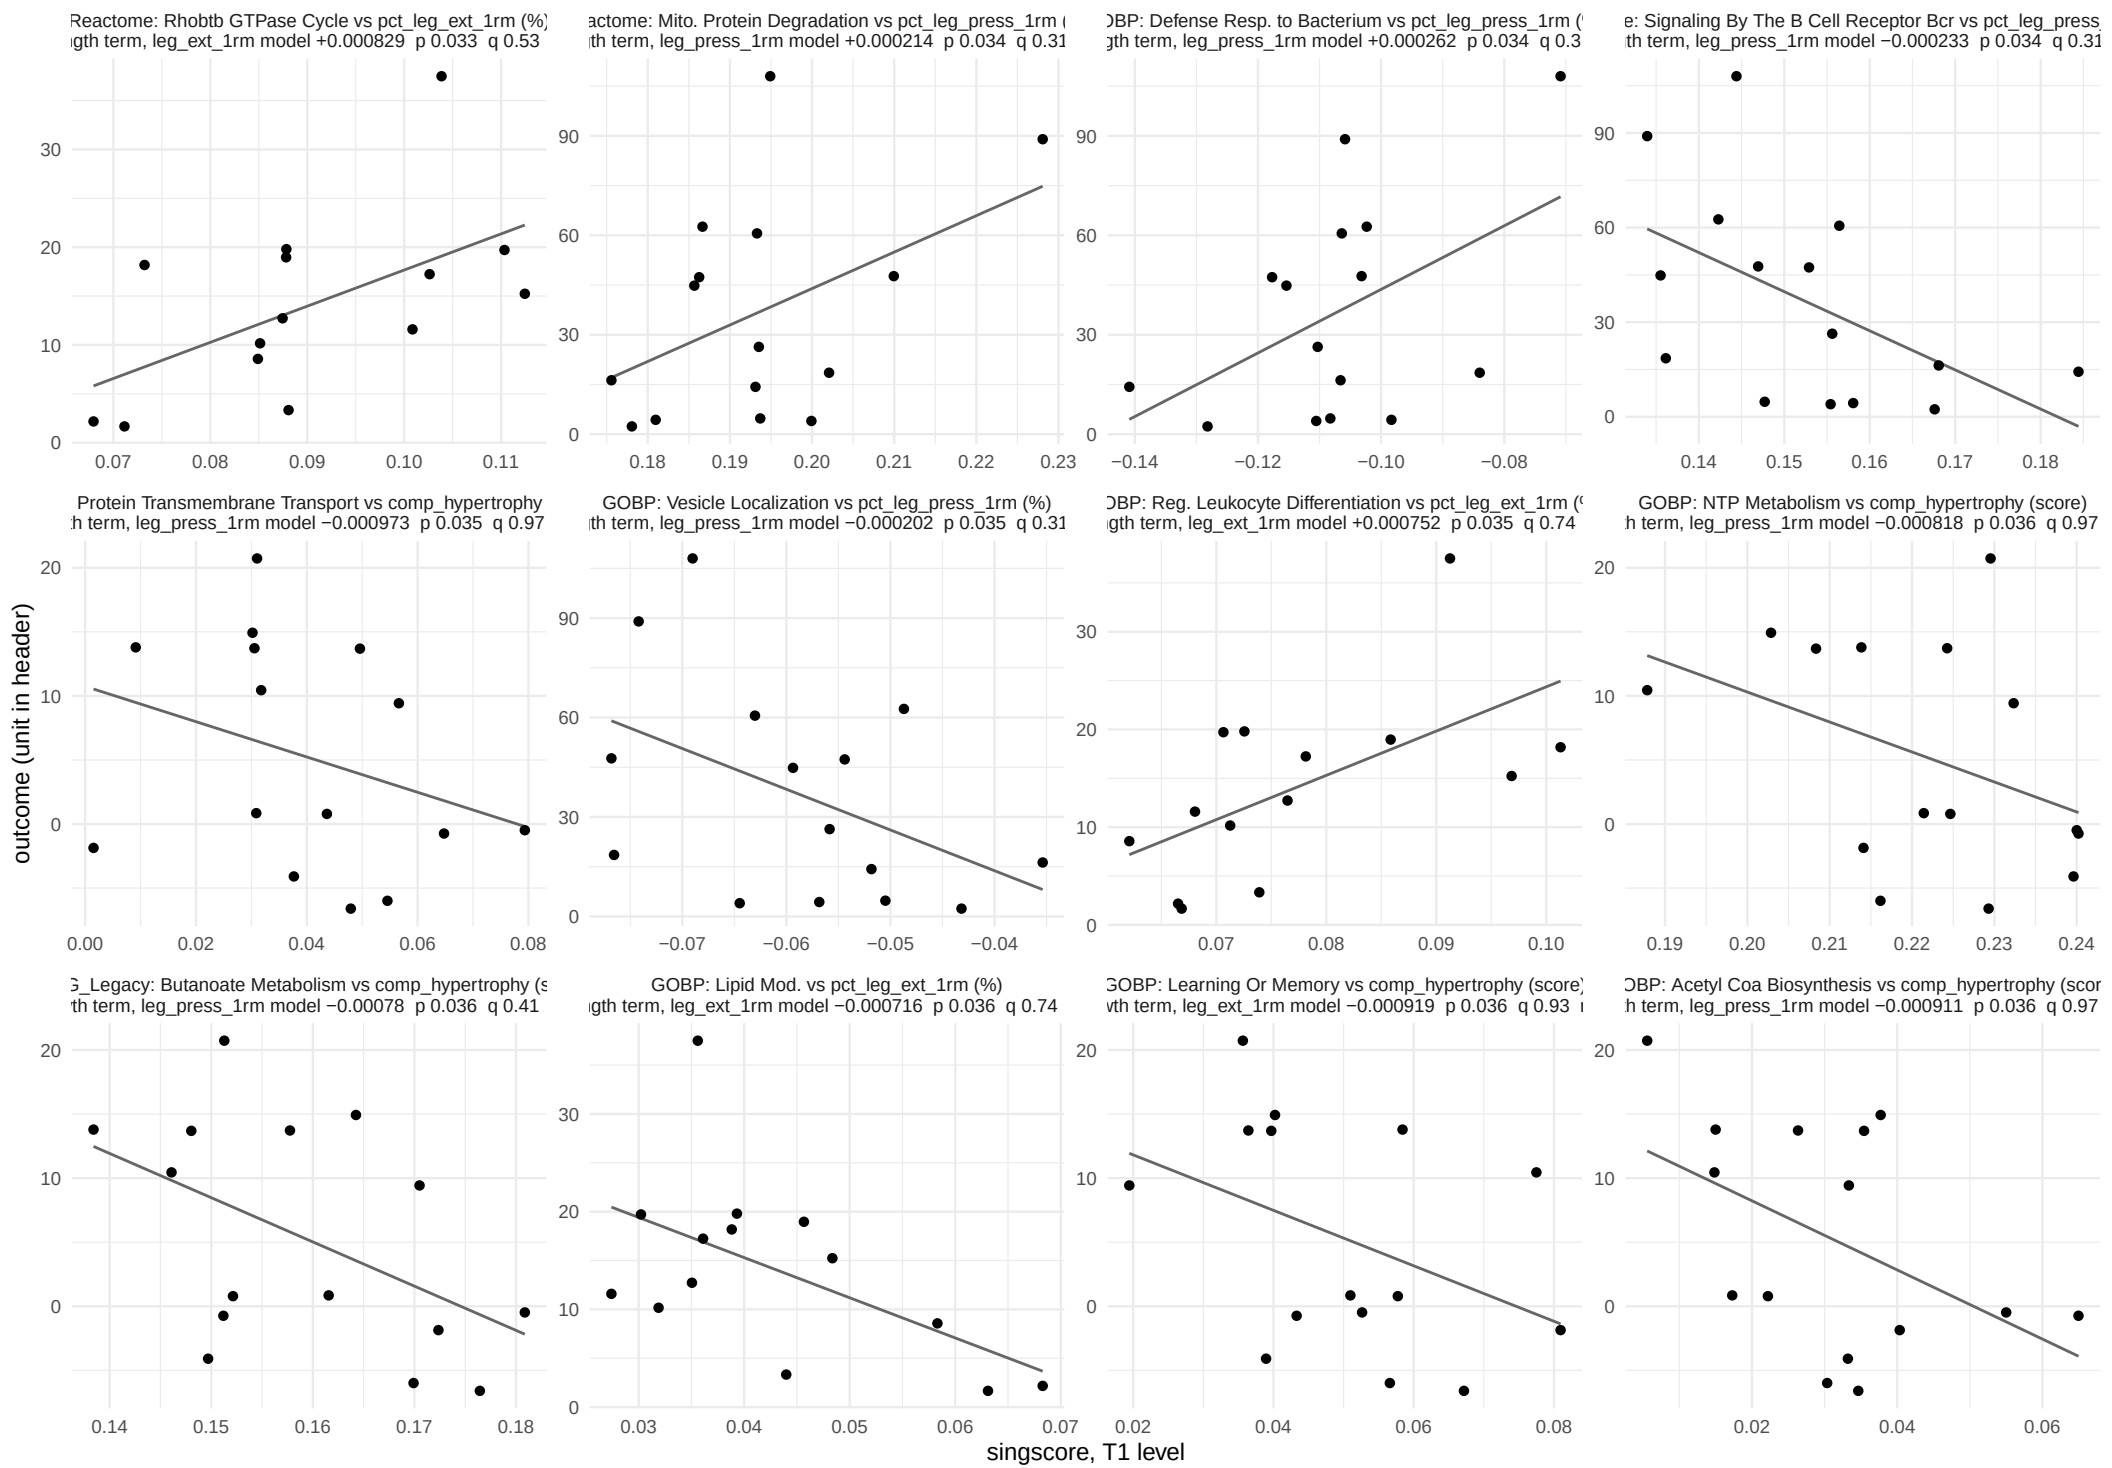

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/02_sets.xlsx, two_predictor.

Two predictor, baseline window


334 of 5512 feature−outcome pairs at p < 0.05, 7 at BH < 0.05. Page 22 of 28.

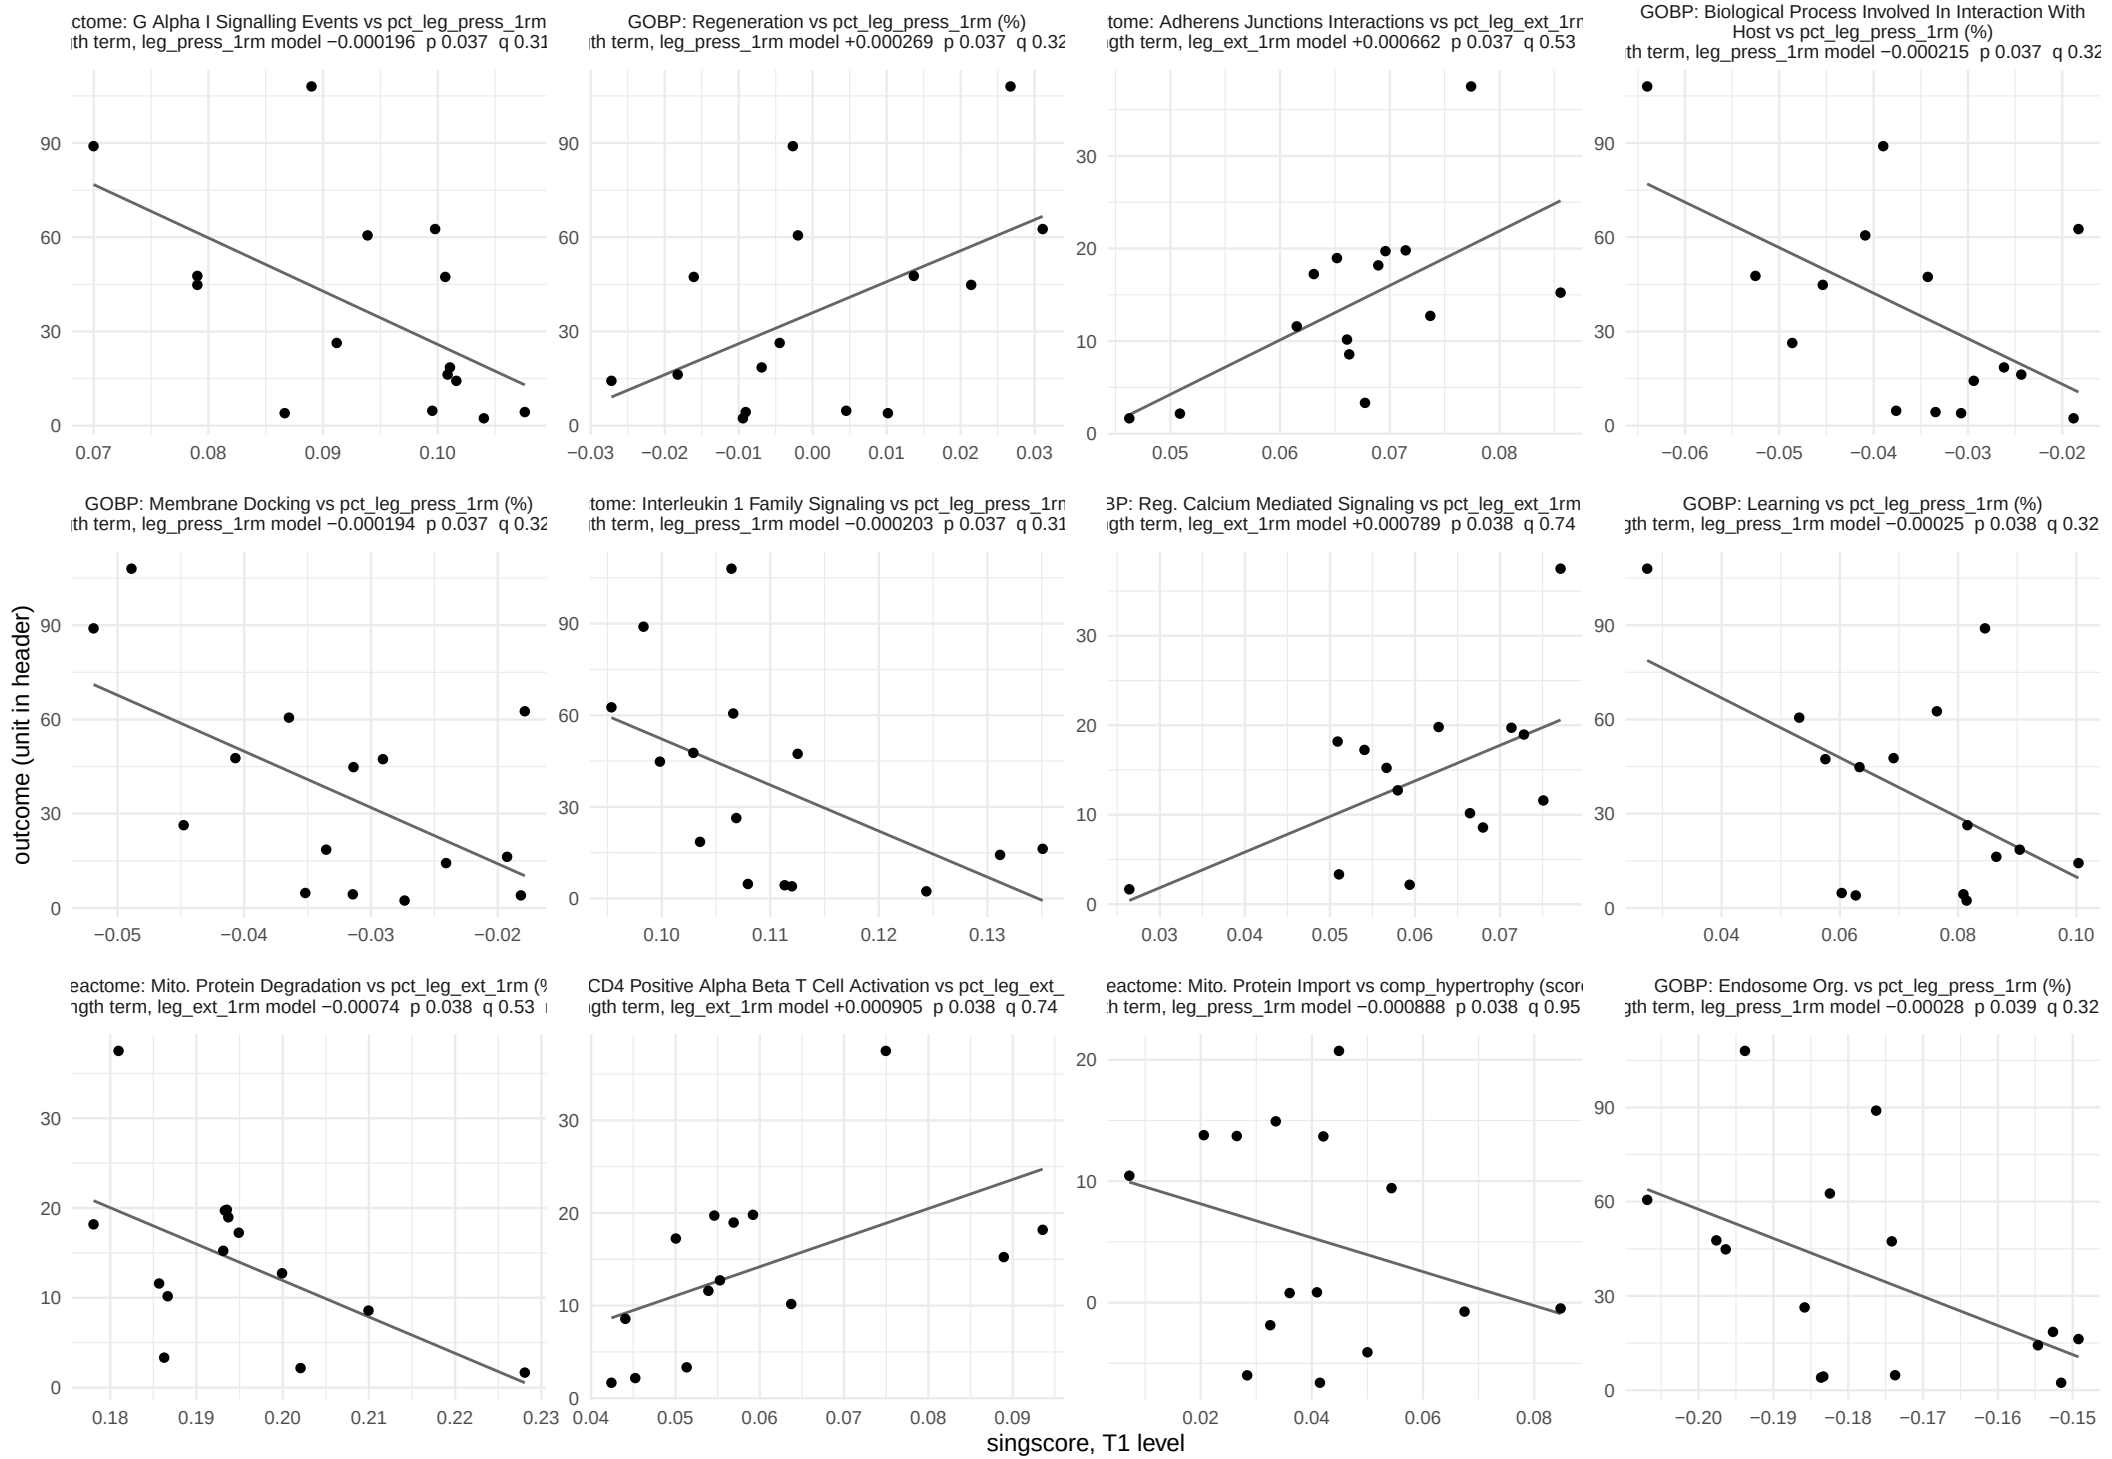

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/02_sets.xlsx, two_predictor.

Two predictor, baseline window


334 of 5512 feature−outcome pairs at p < 0.05, 7 at BH < 0.05. Page 23 of 28.

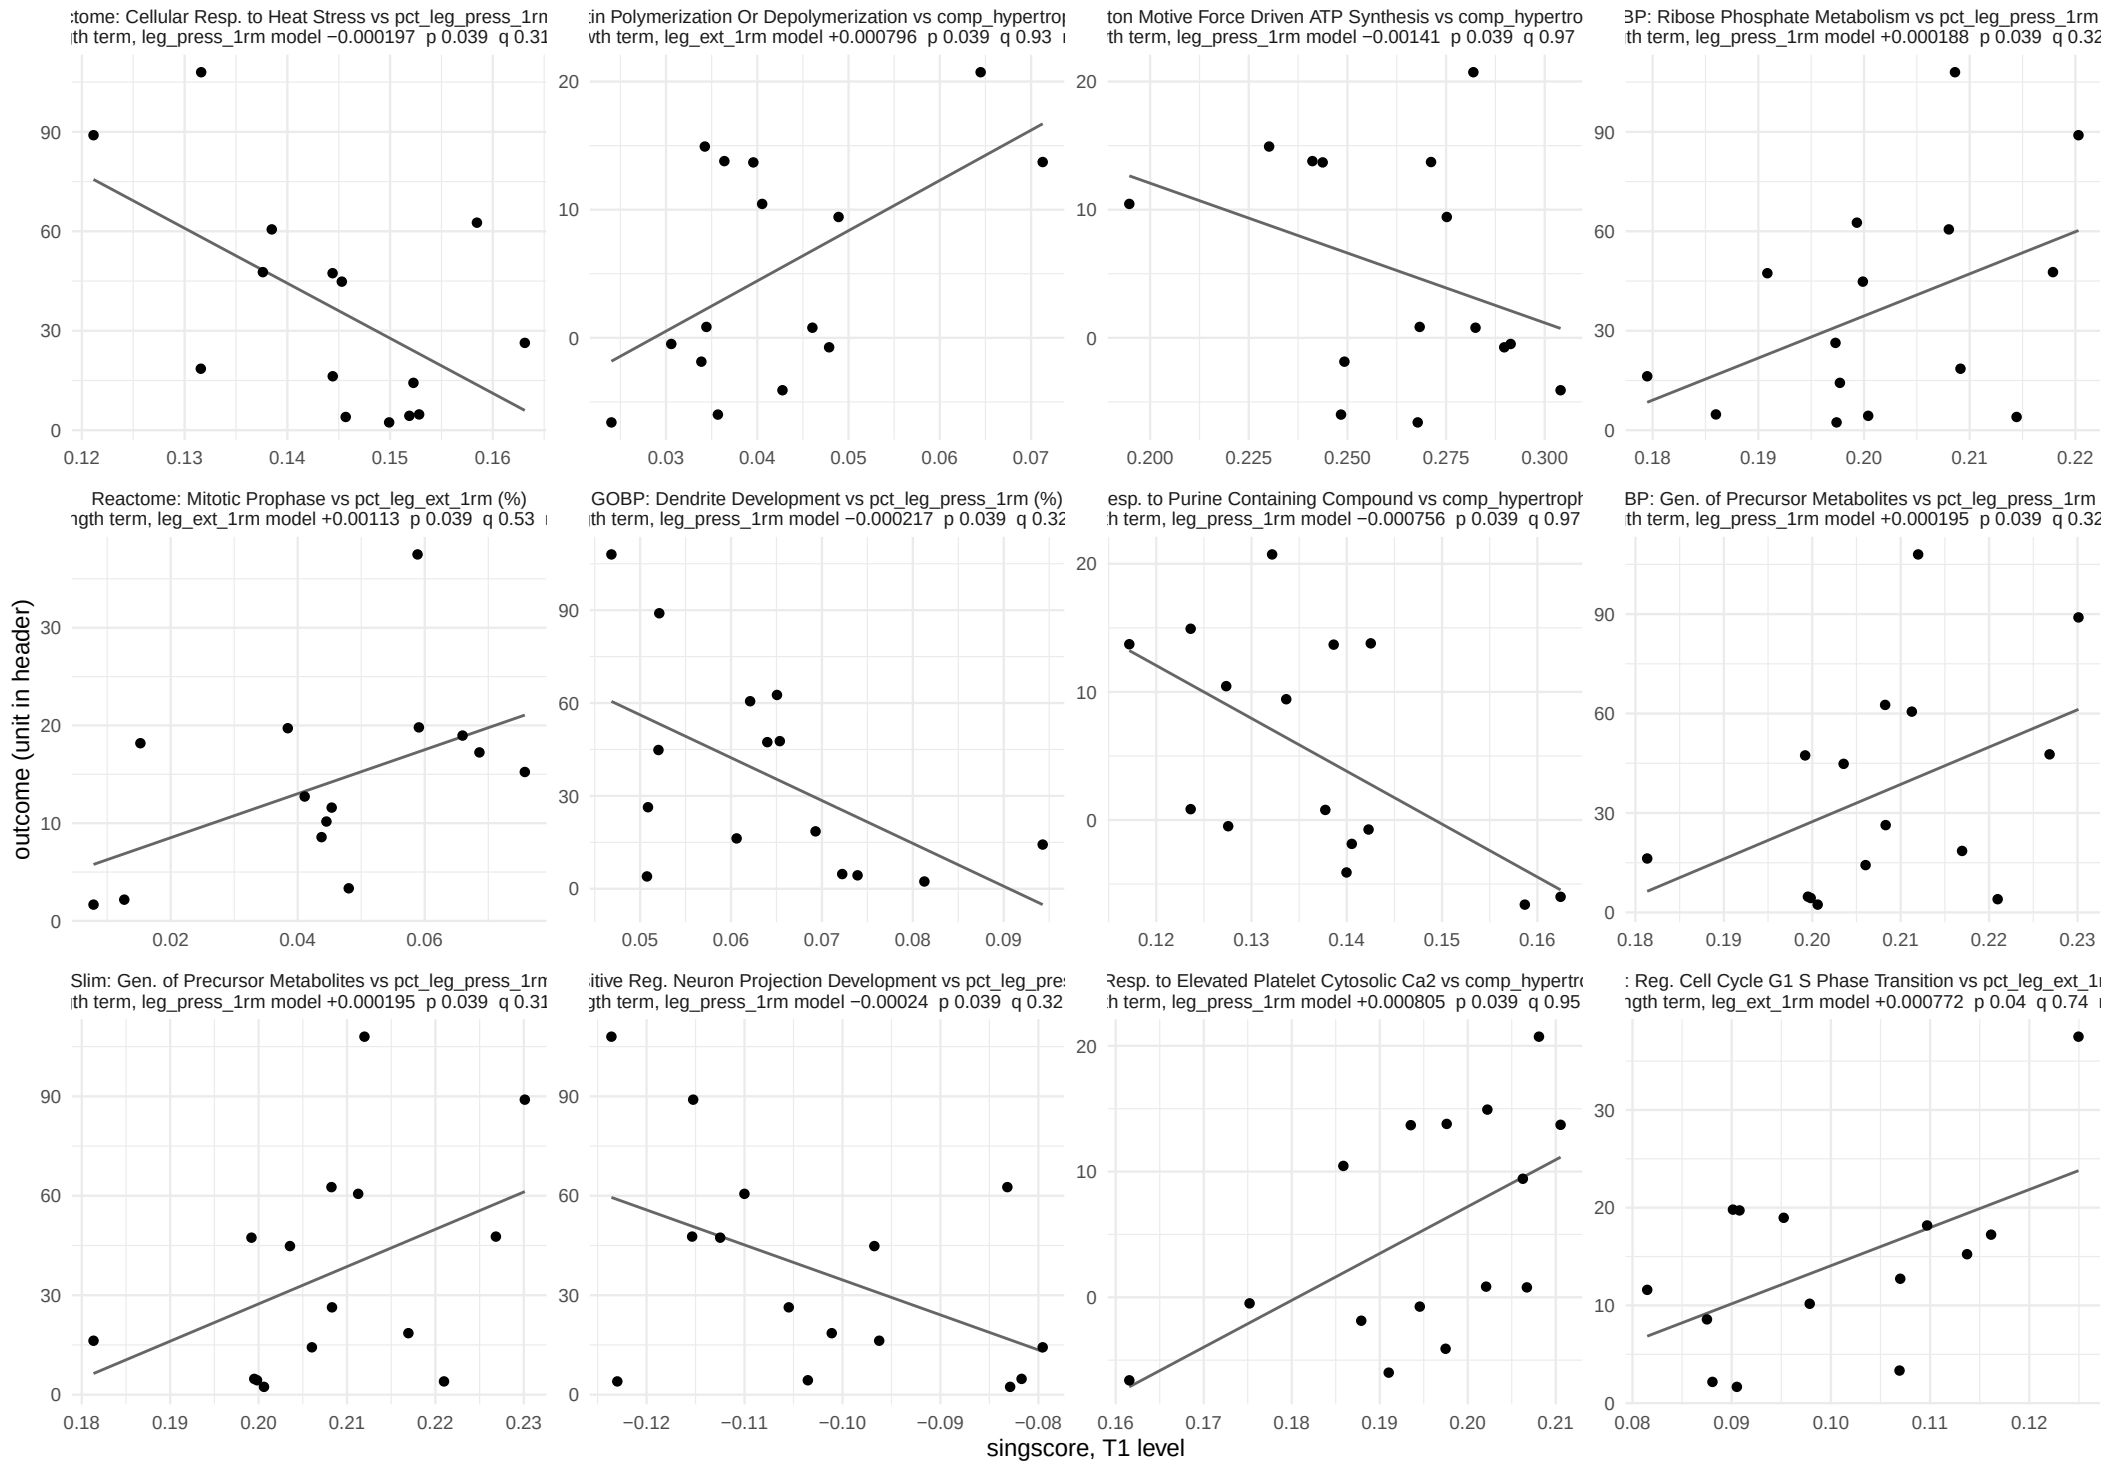

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/02_sets.xlsx, two_predictor.

Two predictor, baseline window


334 of 5512 feature−outcome pairs at p < 0.05, 7 at BH < 0.05. Page 24 of 28.

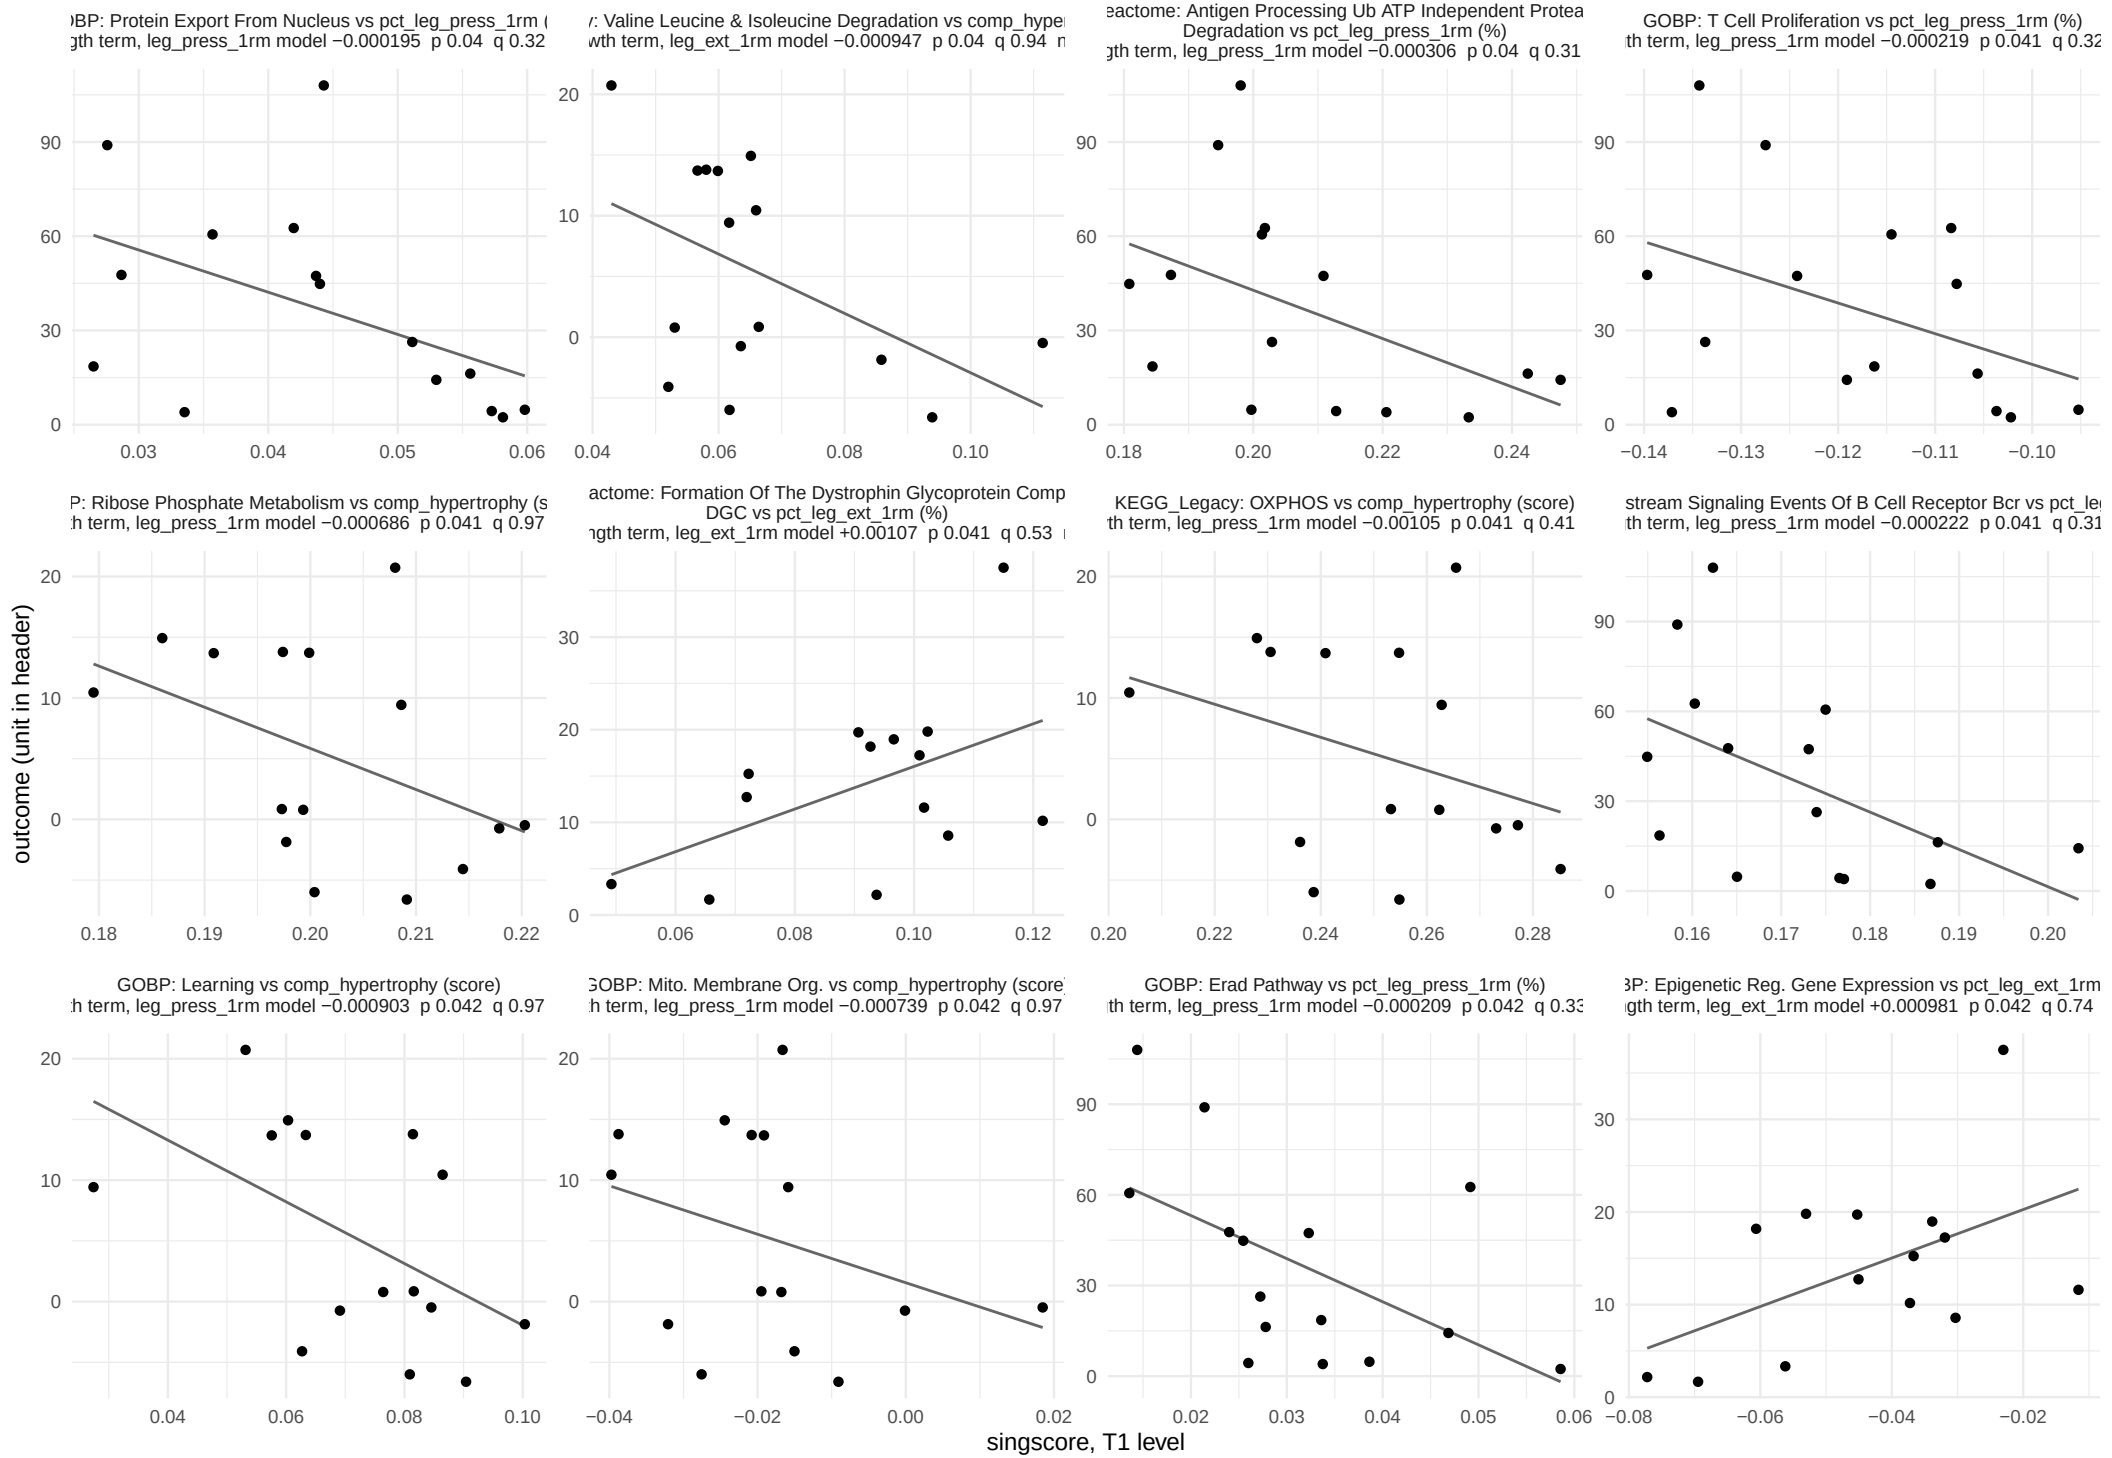

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/02_sets.xlsx, two_predictor.

Two predictor, baseline window


334 of 5512 feature−outcome pairs at p < 0.05, 7 at BH < 0.05. Page 25 of 28.

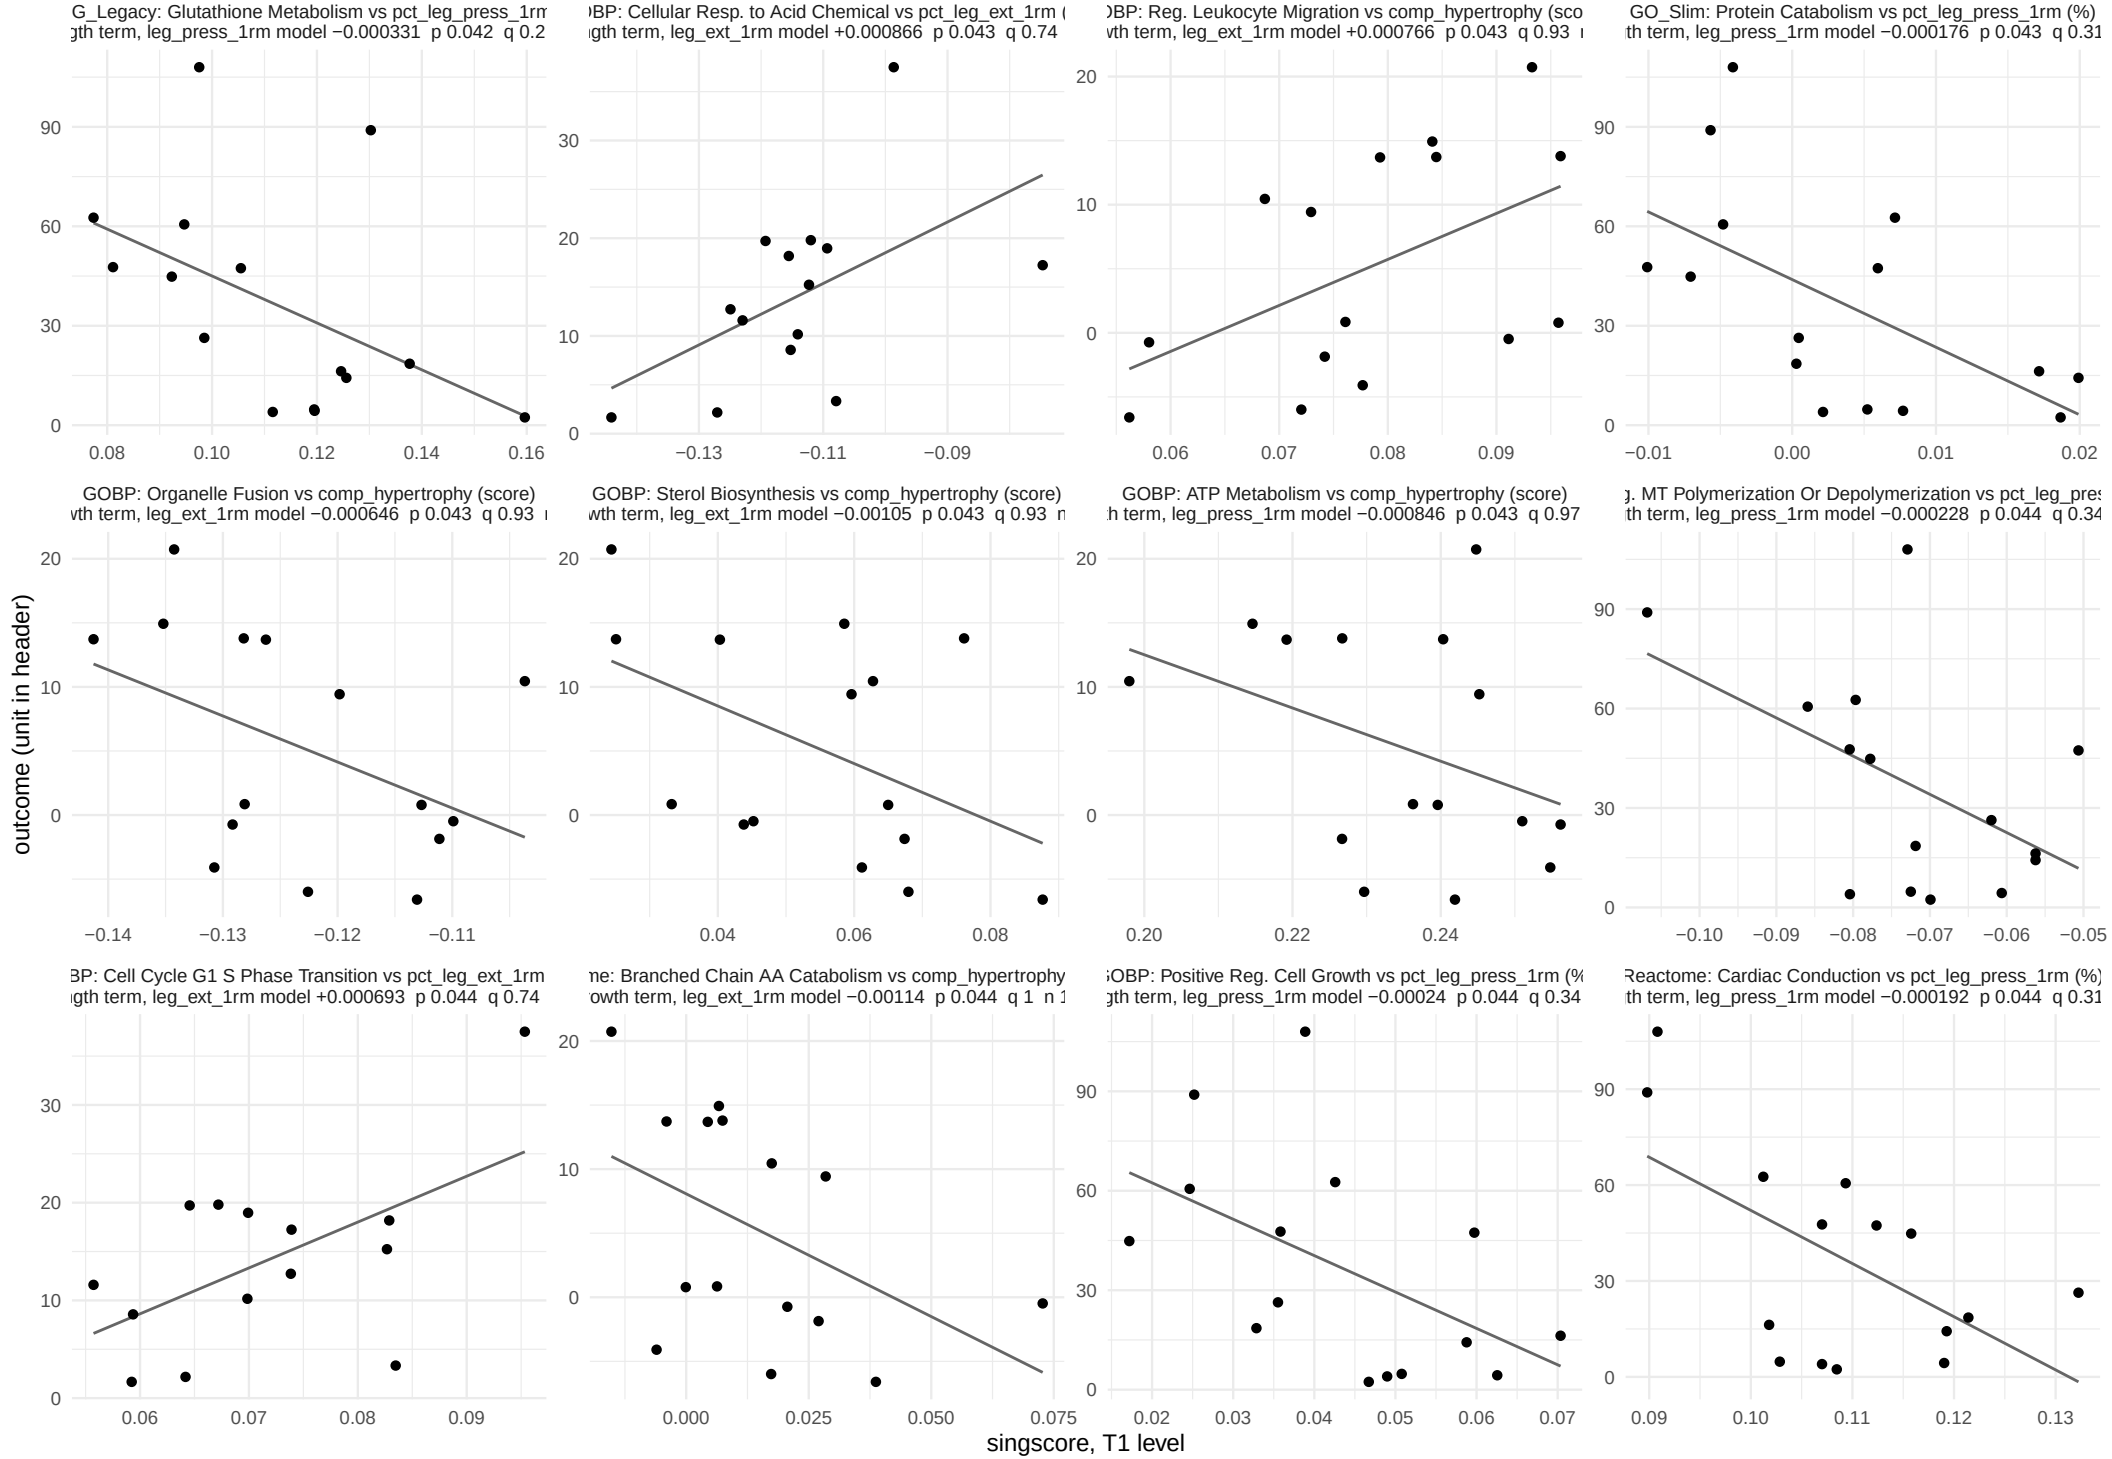

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/02_sets.xlsx, two_predictor.

Two predictor, baseline window


334 of 5512 feature−outcome pairs at p < 0.05, 7 at BH < 0.05. Page 26 of 28.

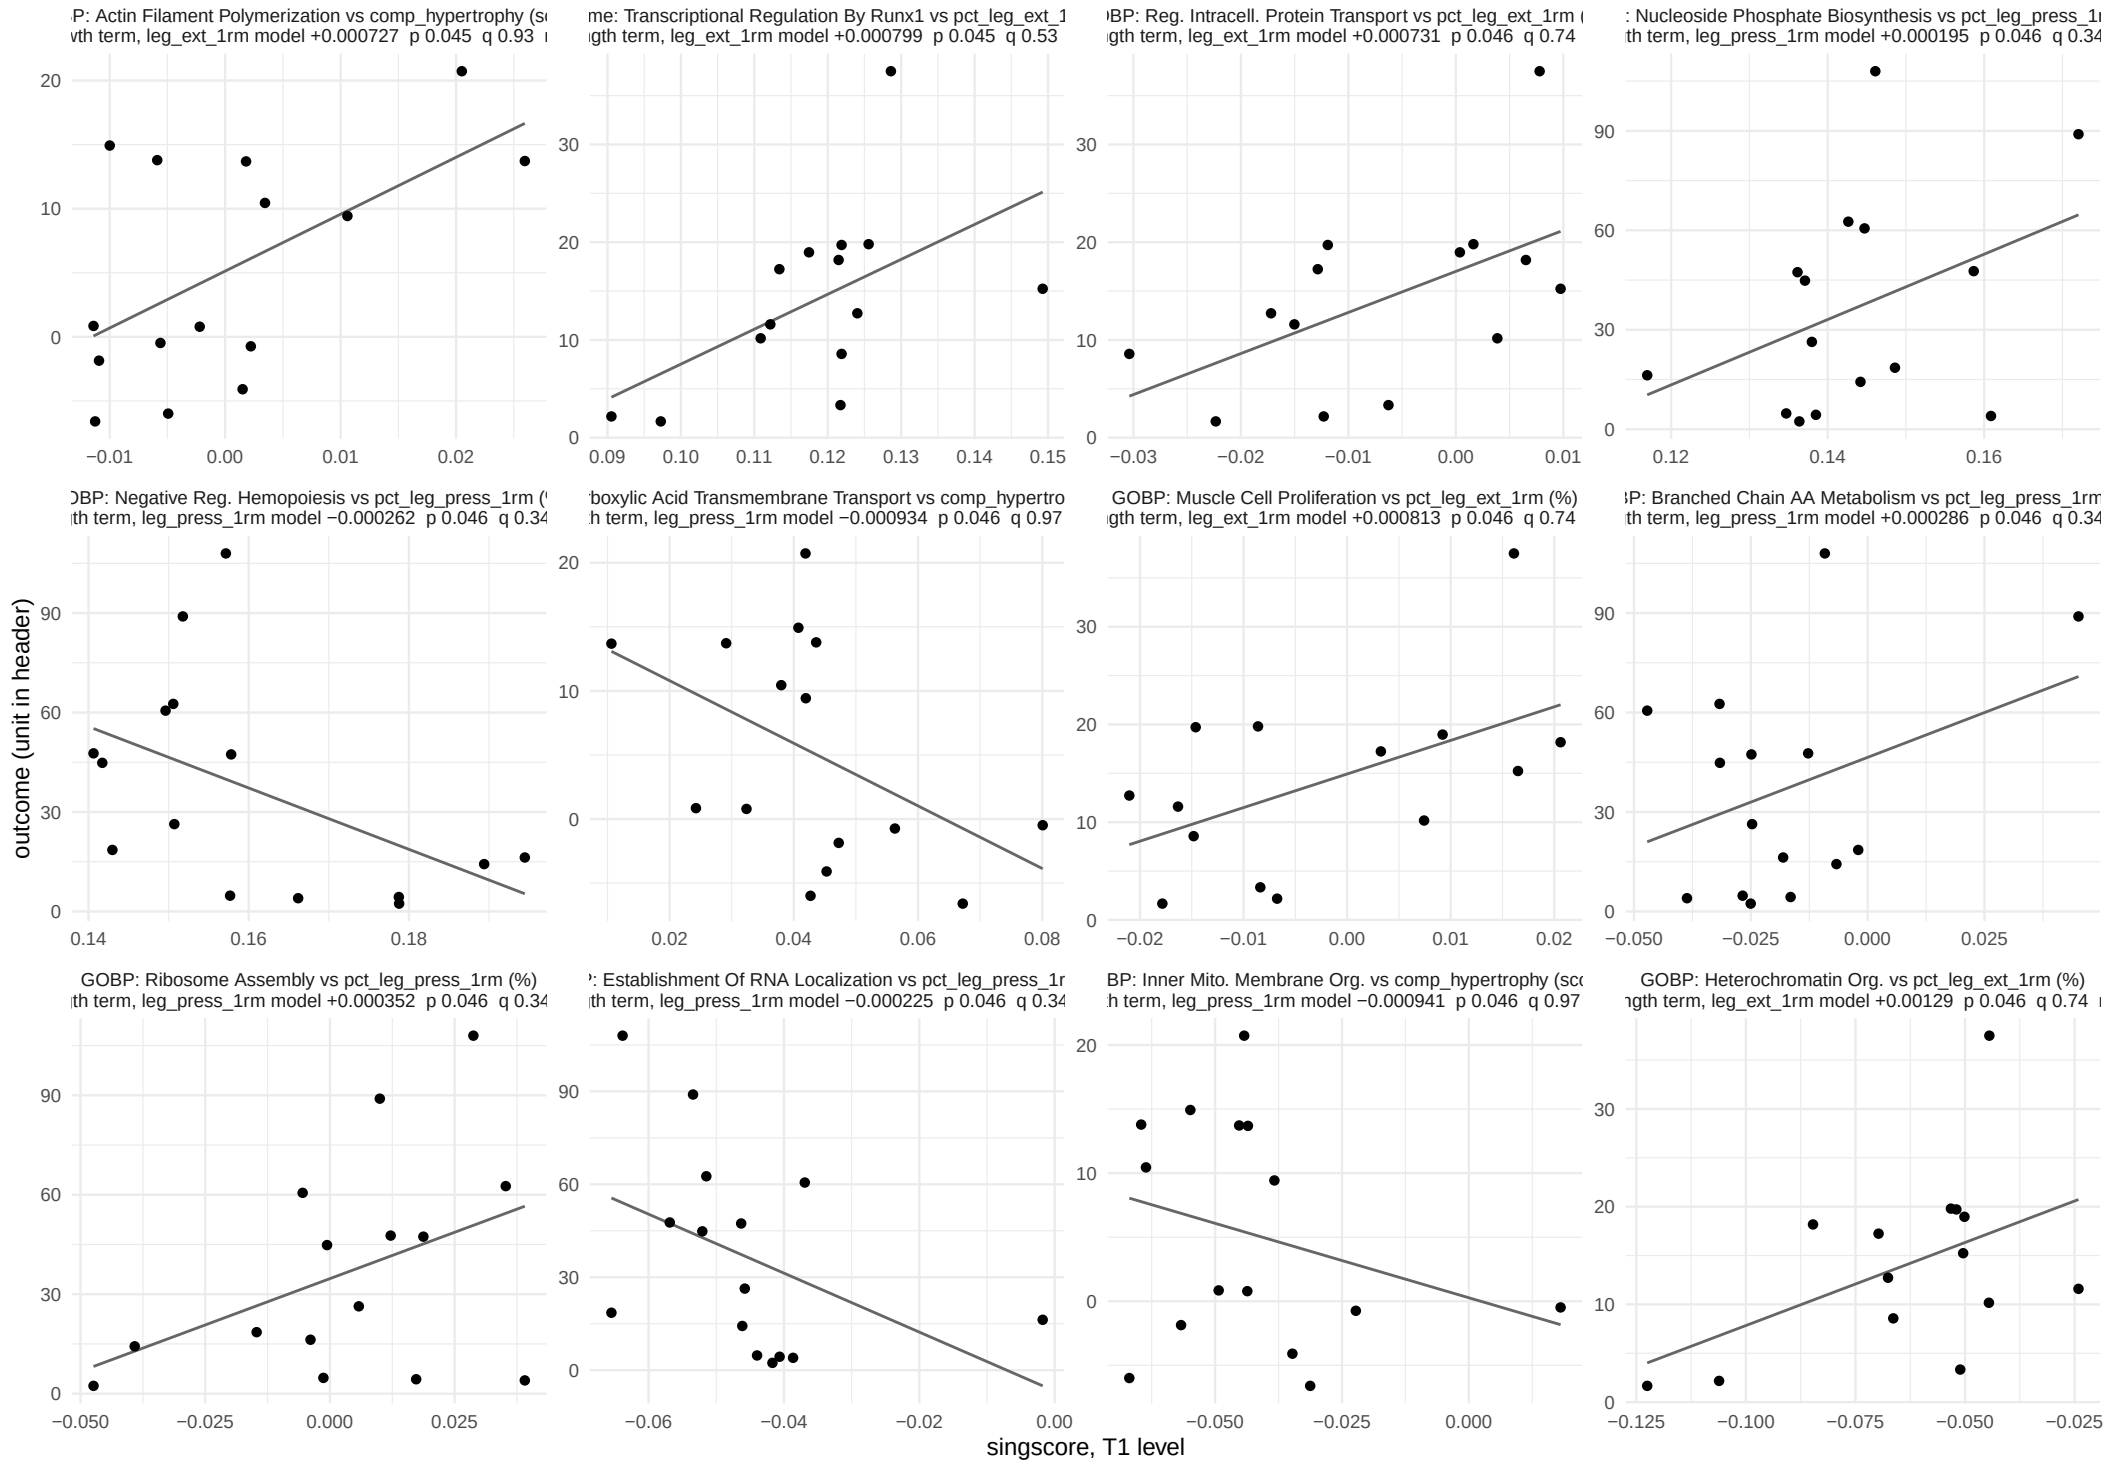

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/02_sets.xlsx, two_predictor.

Two predictor, baseline window


334 of 5512 feature−outcome pairs at p < 0.05, 7 at BH < 0.05. Page 27 of 28.

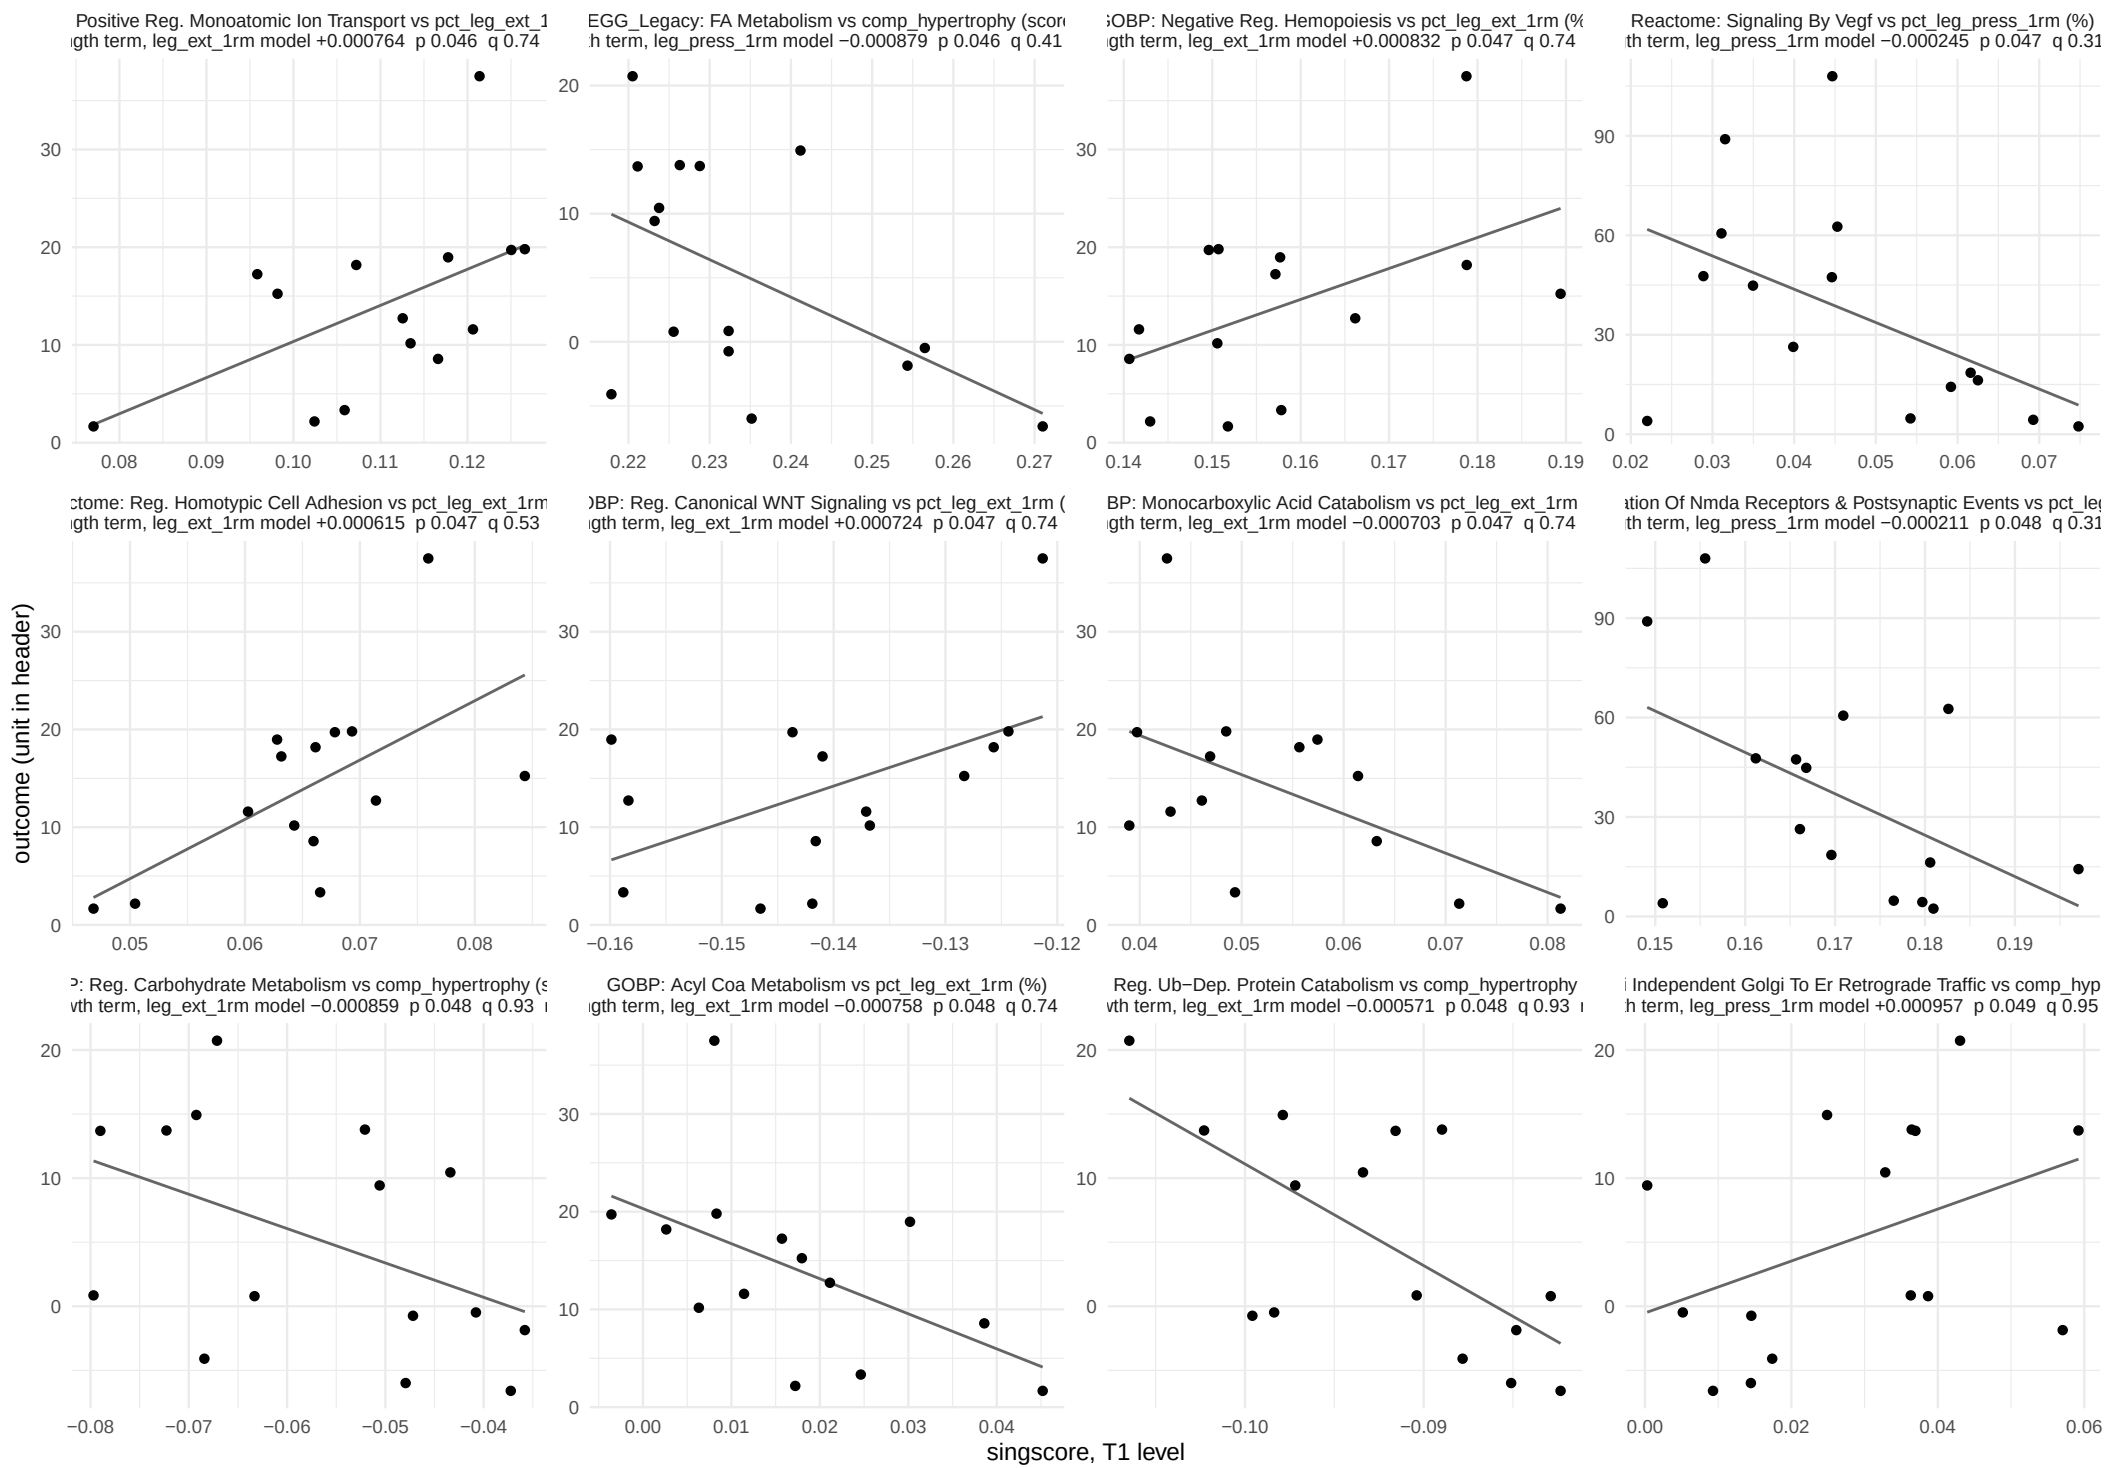

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/02_sets.xlsx, two_predictor.

Two predictor, baseline window


334 of 5512 feature−outcome pairs at p < 0.05, 7 at BH < 0.05. Page 28 of 28.

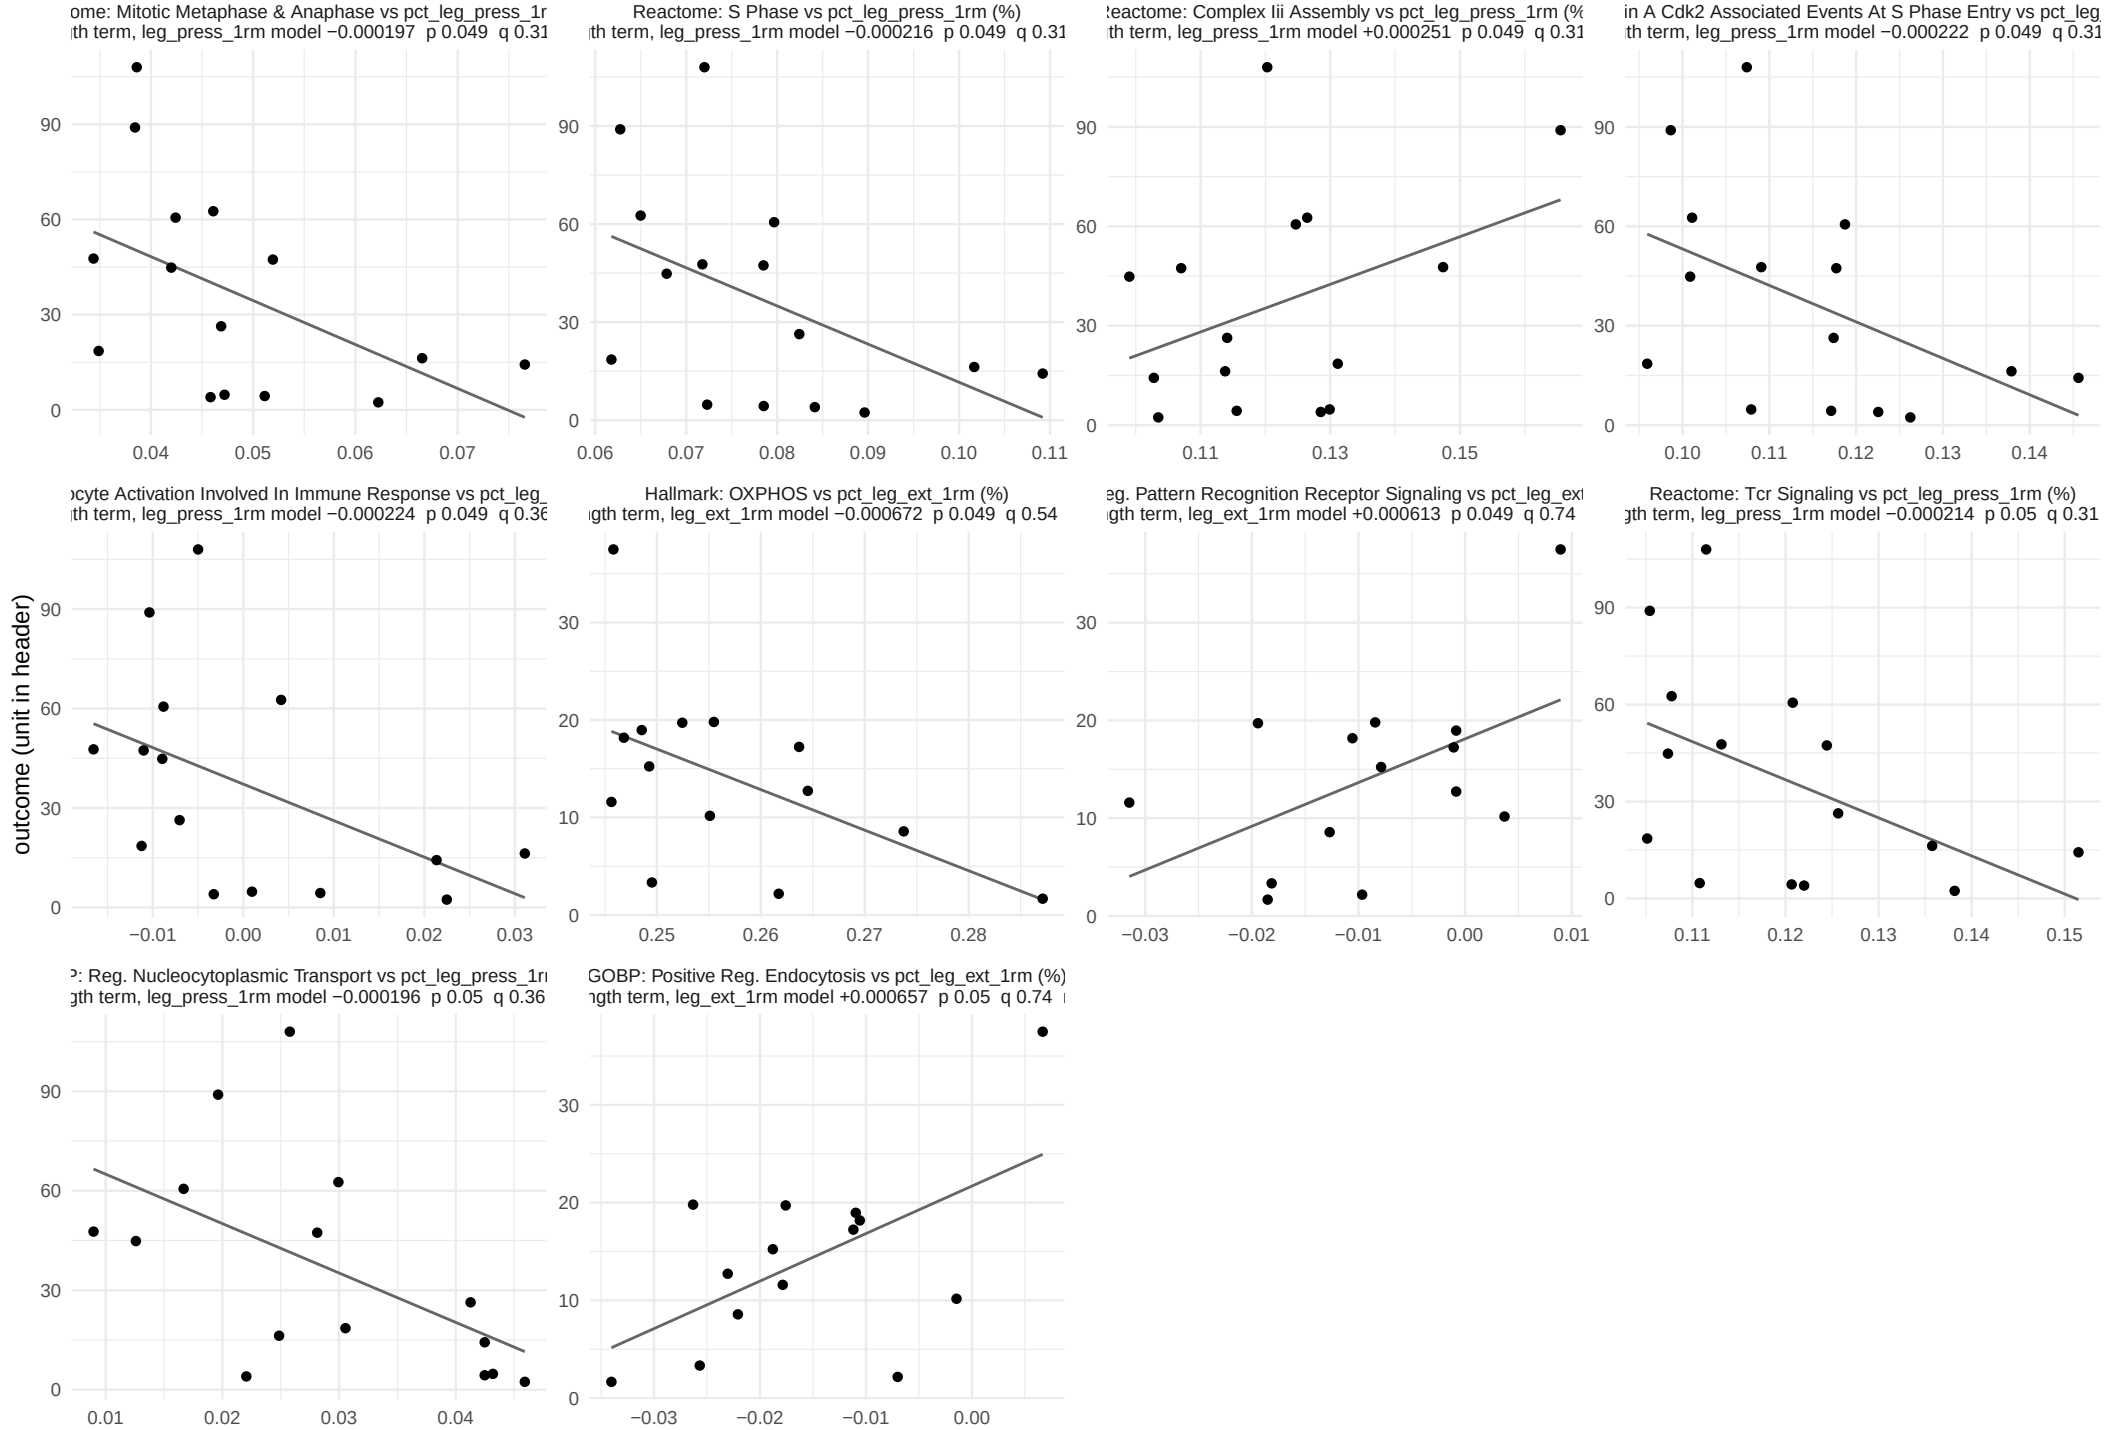

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/02_sets.xlsx, two_predictor.

Two predictor, acute window


178 of 5512 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 1 of 15.

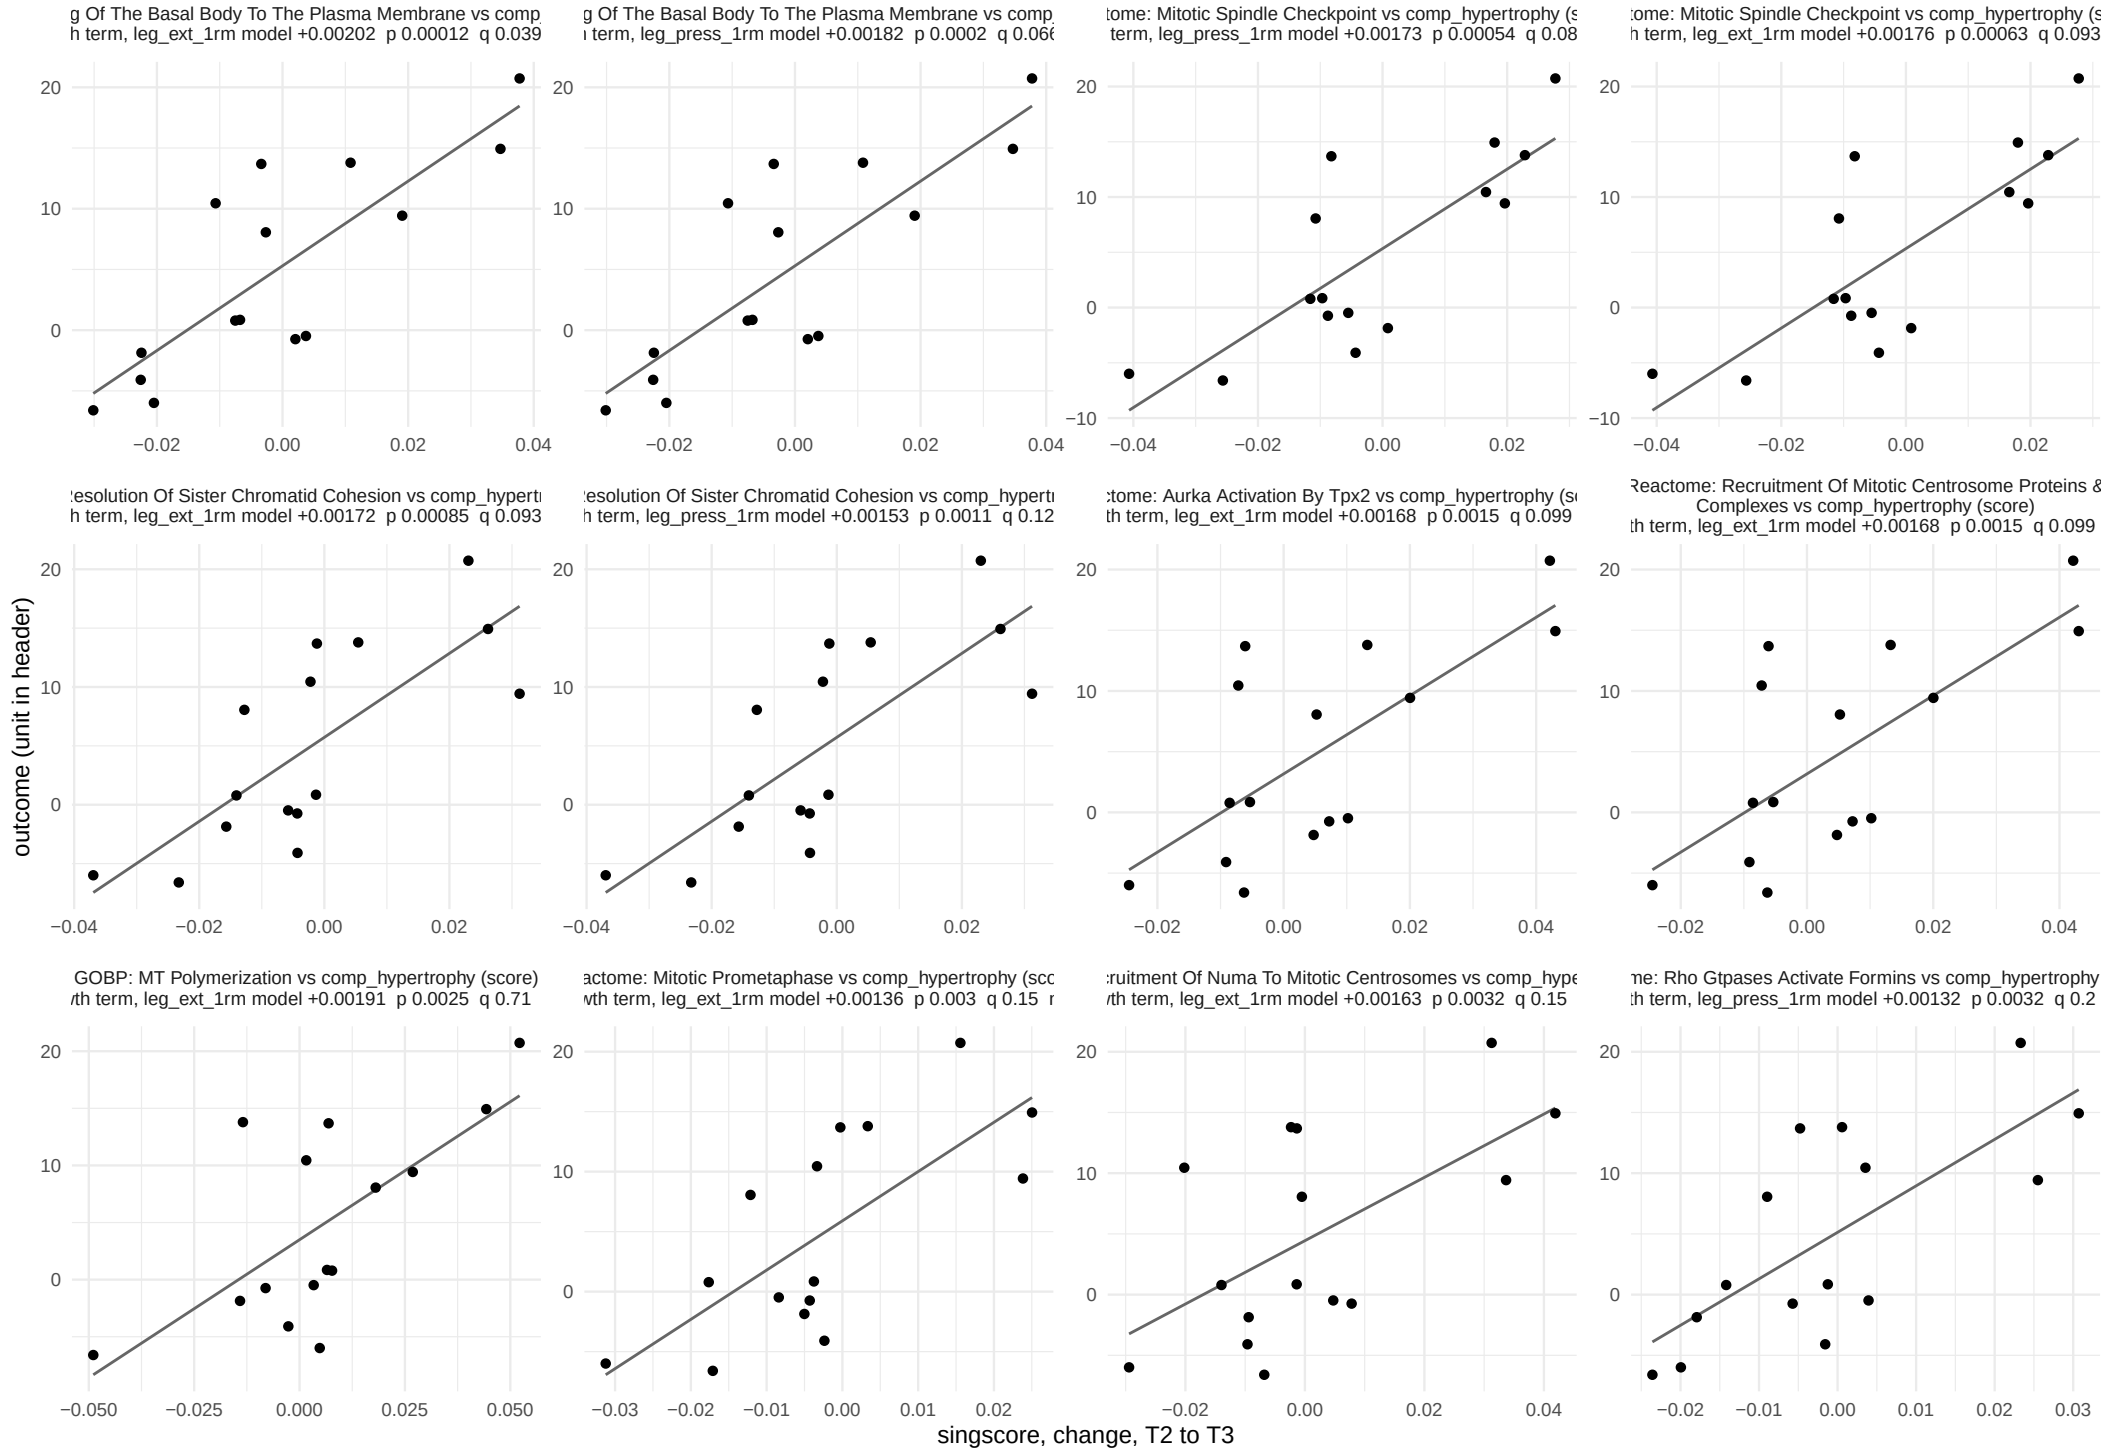

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/02_sets.xlsx, two_predictor.

Two predictor, acute window


178 of 5512 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 2 of 15.

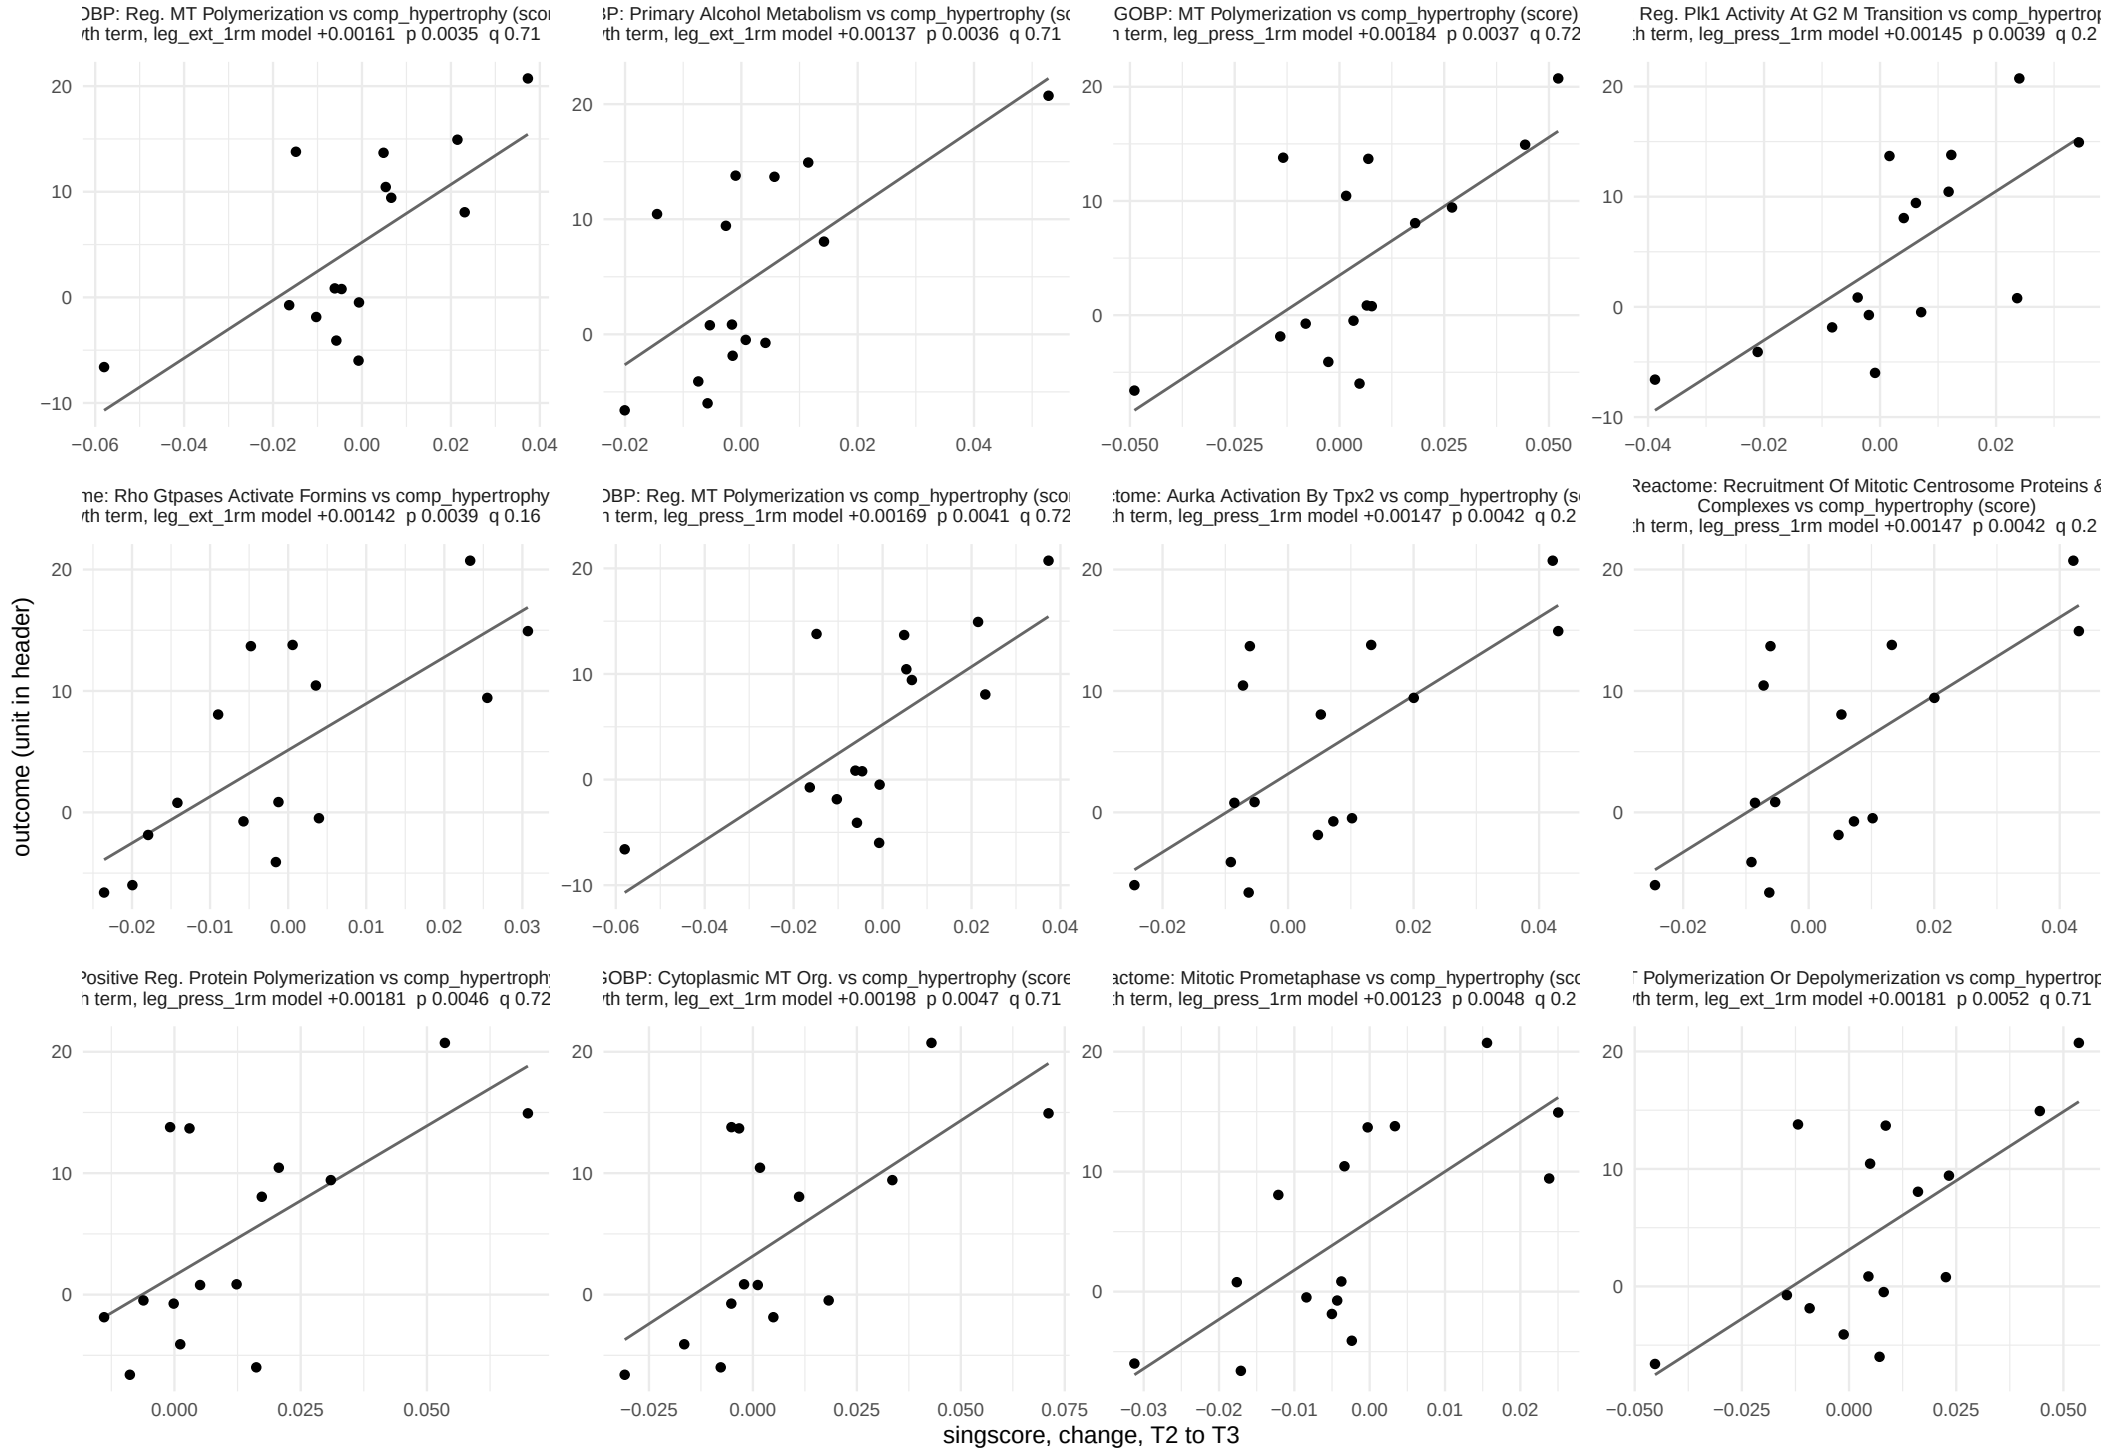

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/02_sets.xlsx, two_predictor.

Two predictor, acute window


178 of 5512 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 3 of 15.

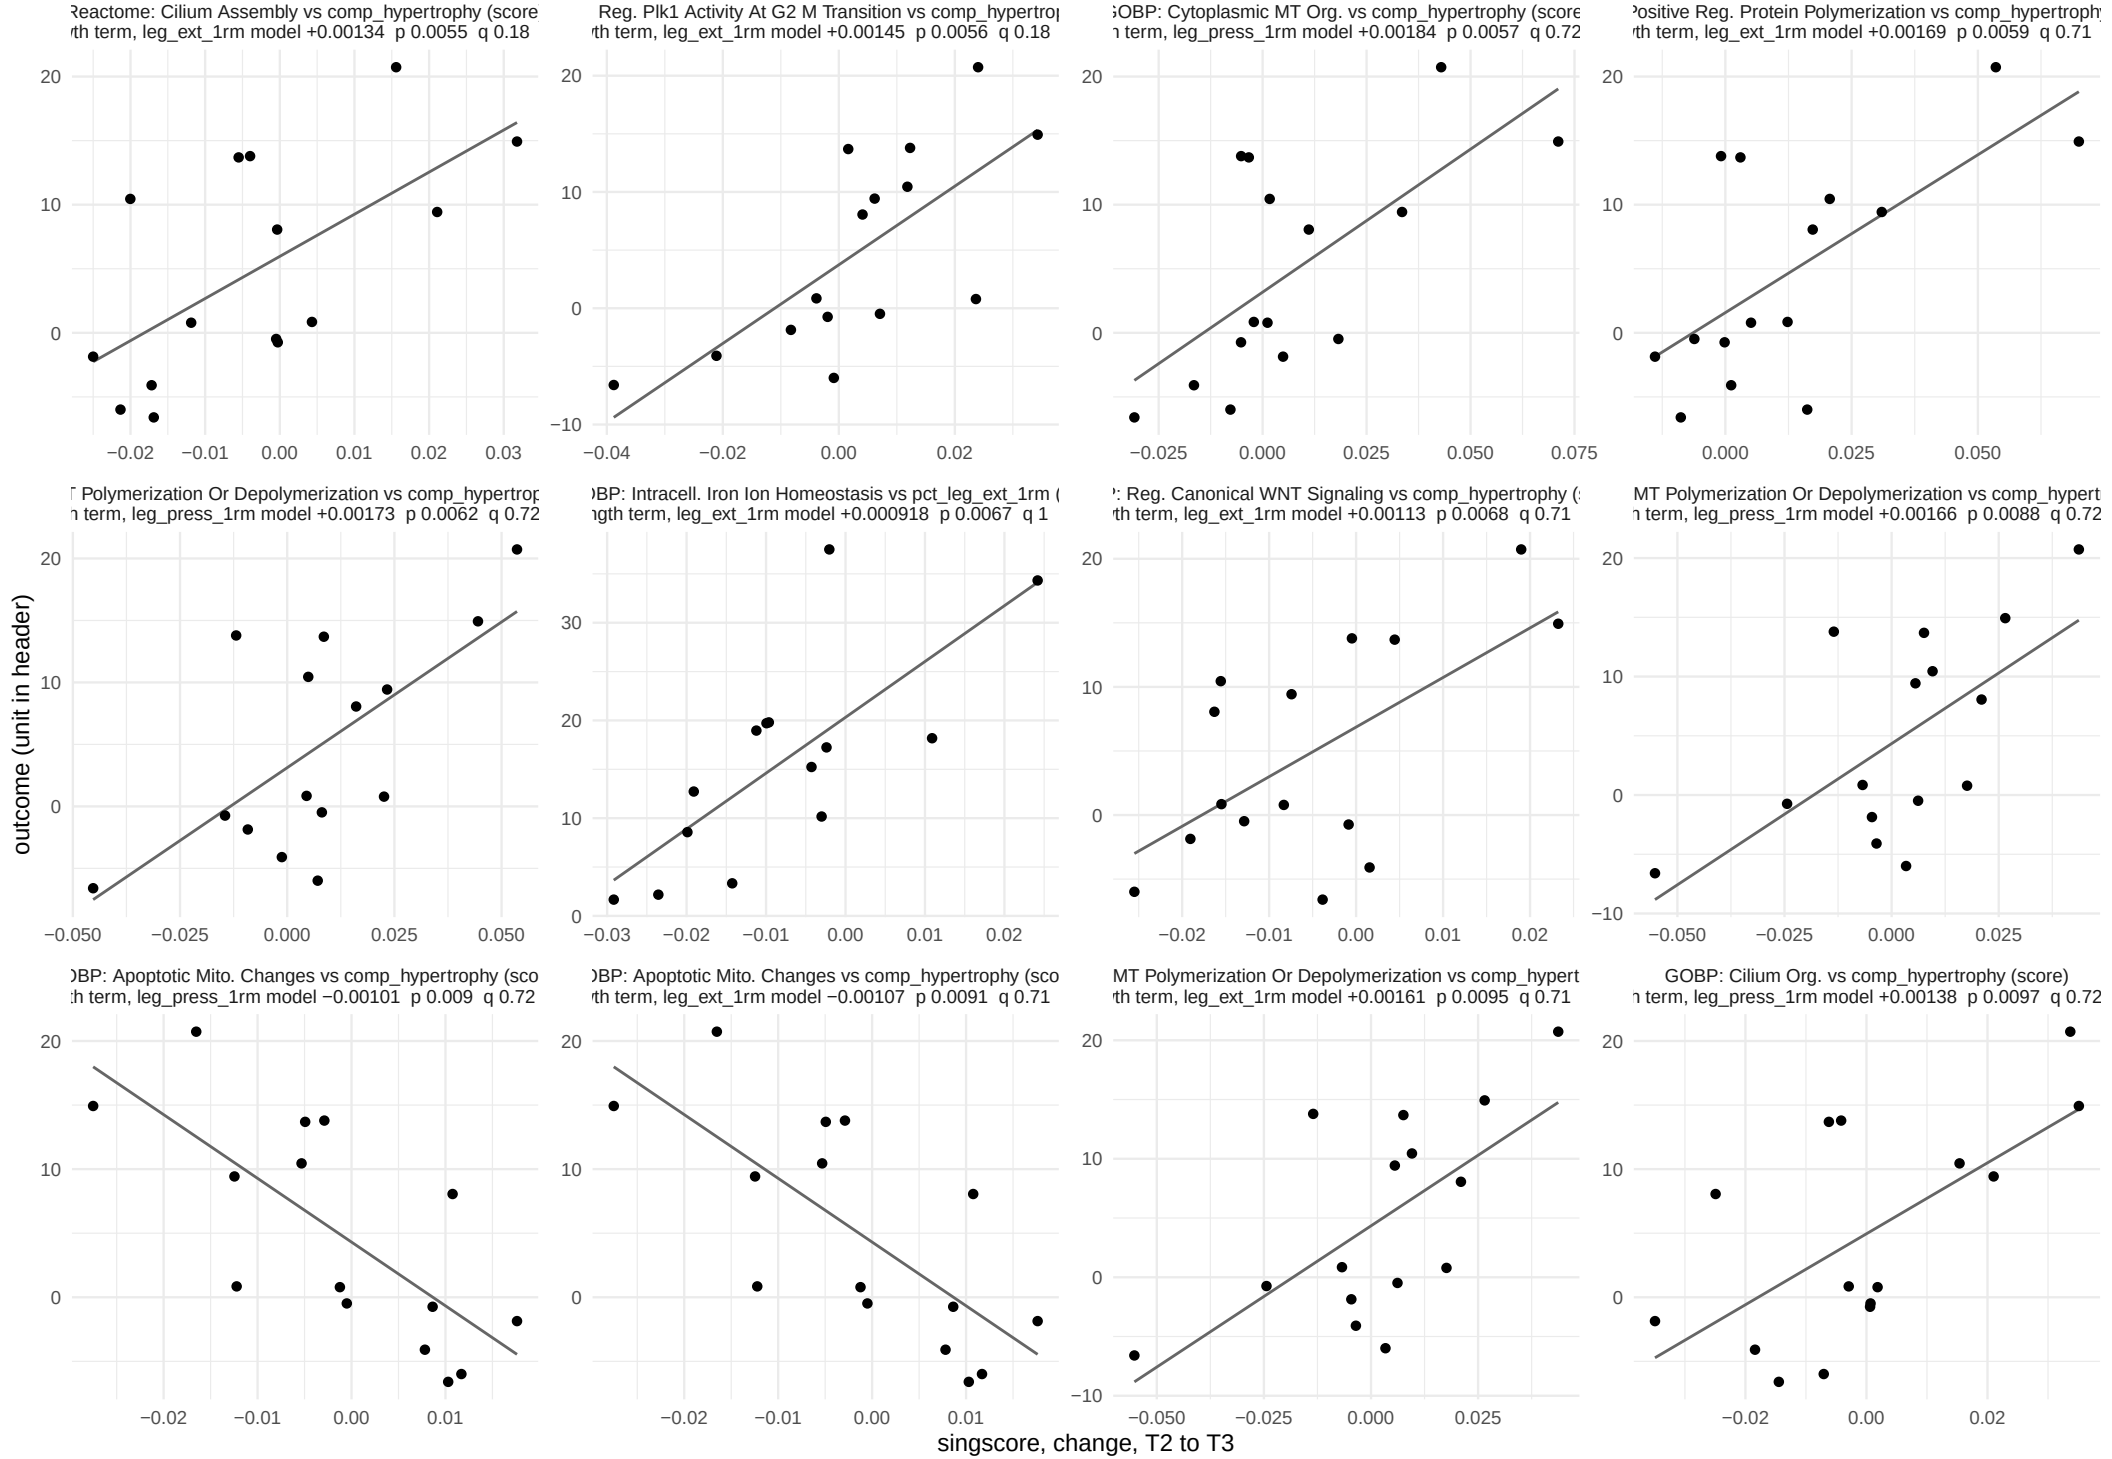

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/02_sets.xlsx, two_predictor.

Two predictor, acute window


178 of 5512 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 4 of 15.

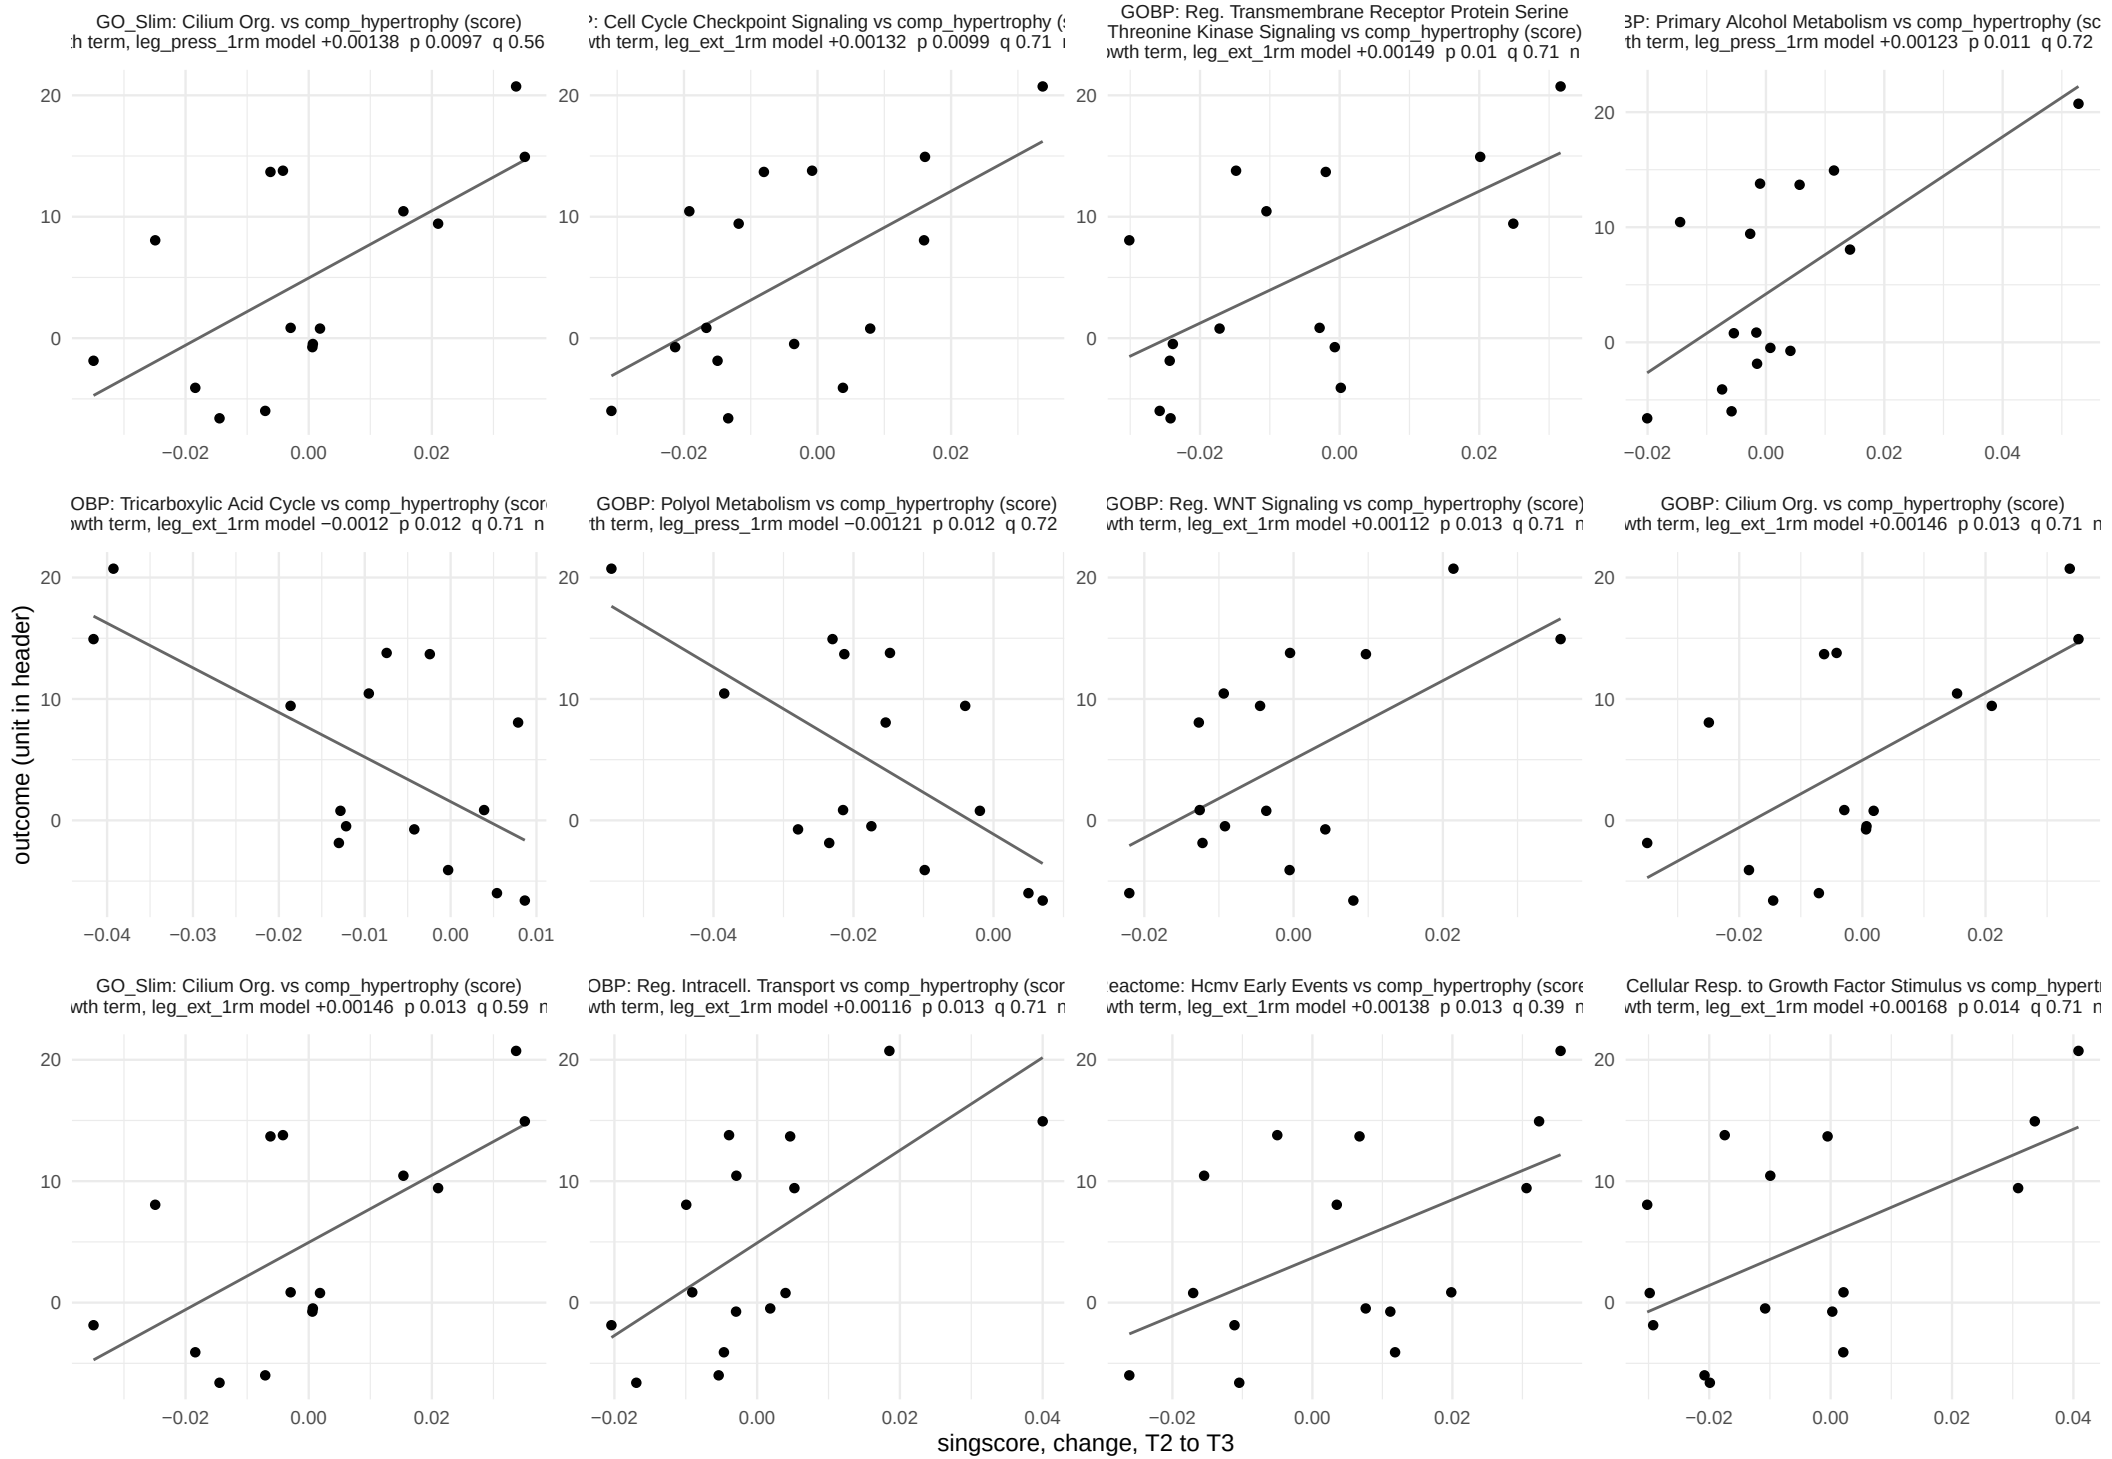

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/02_sets.xlsx, two_predictor.

Two predictor, acute window


178 of 5512 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 5 of 15.

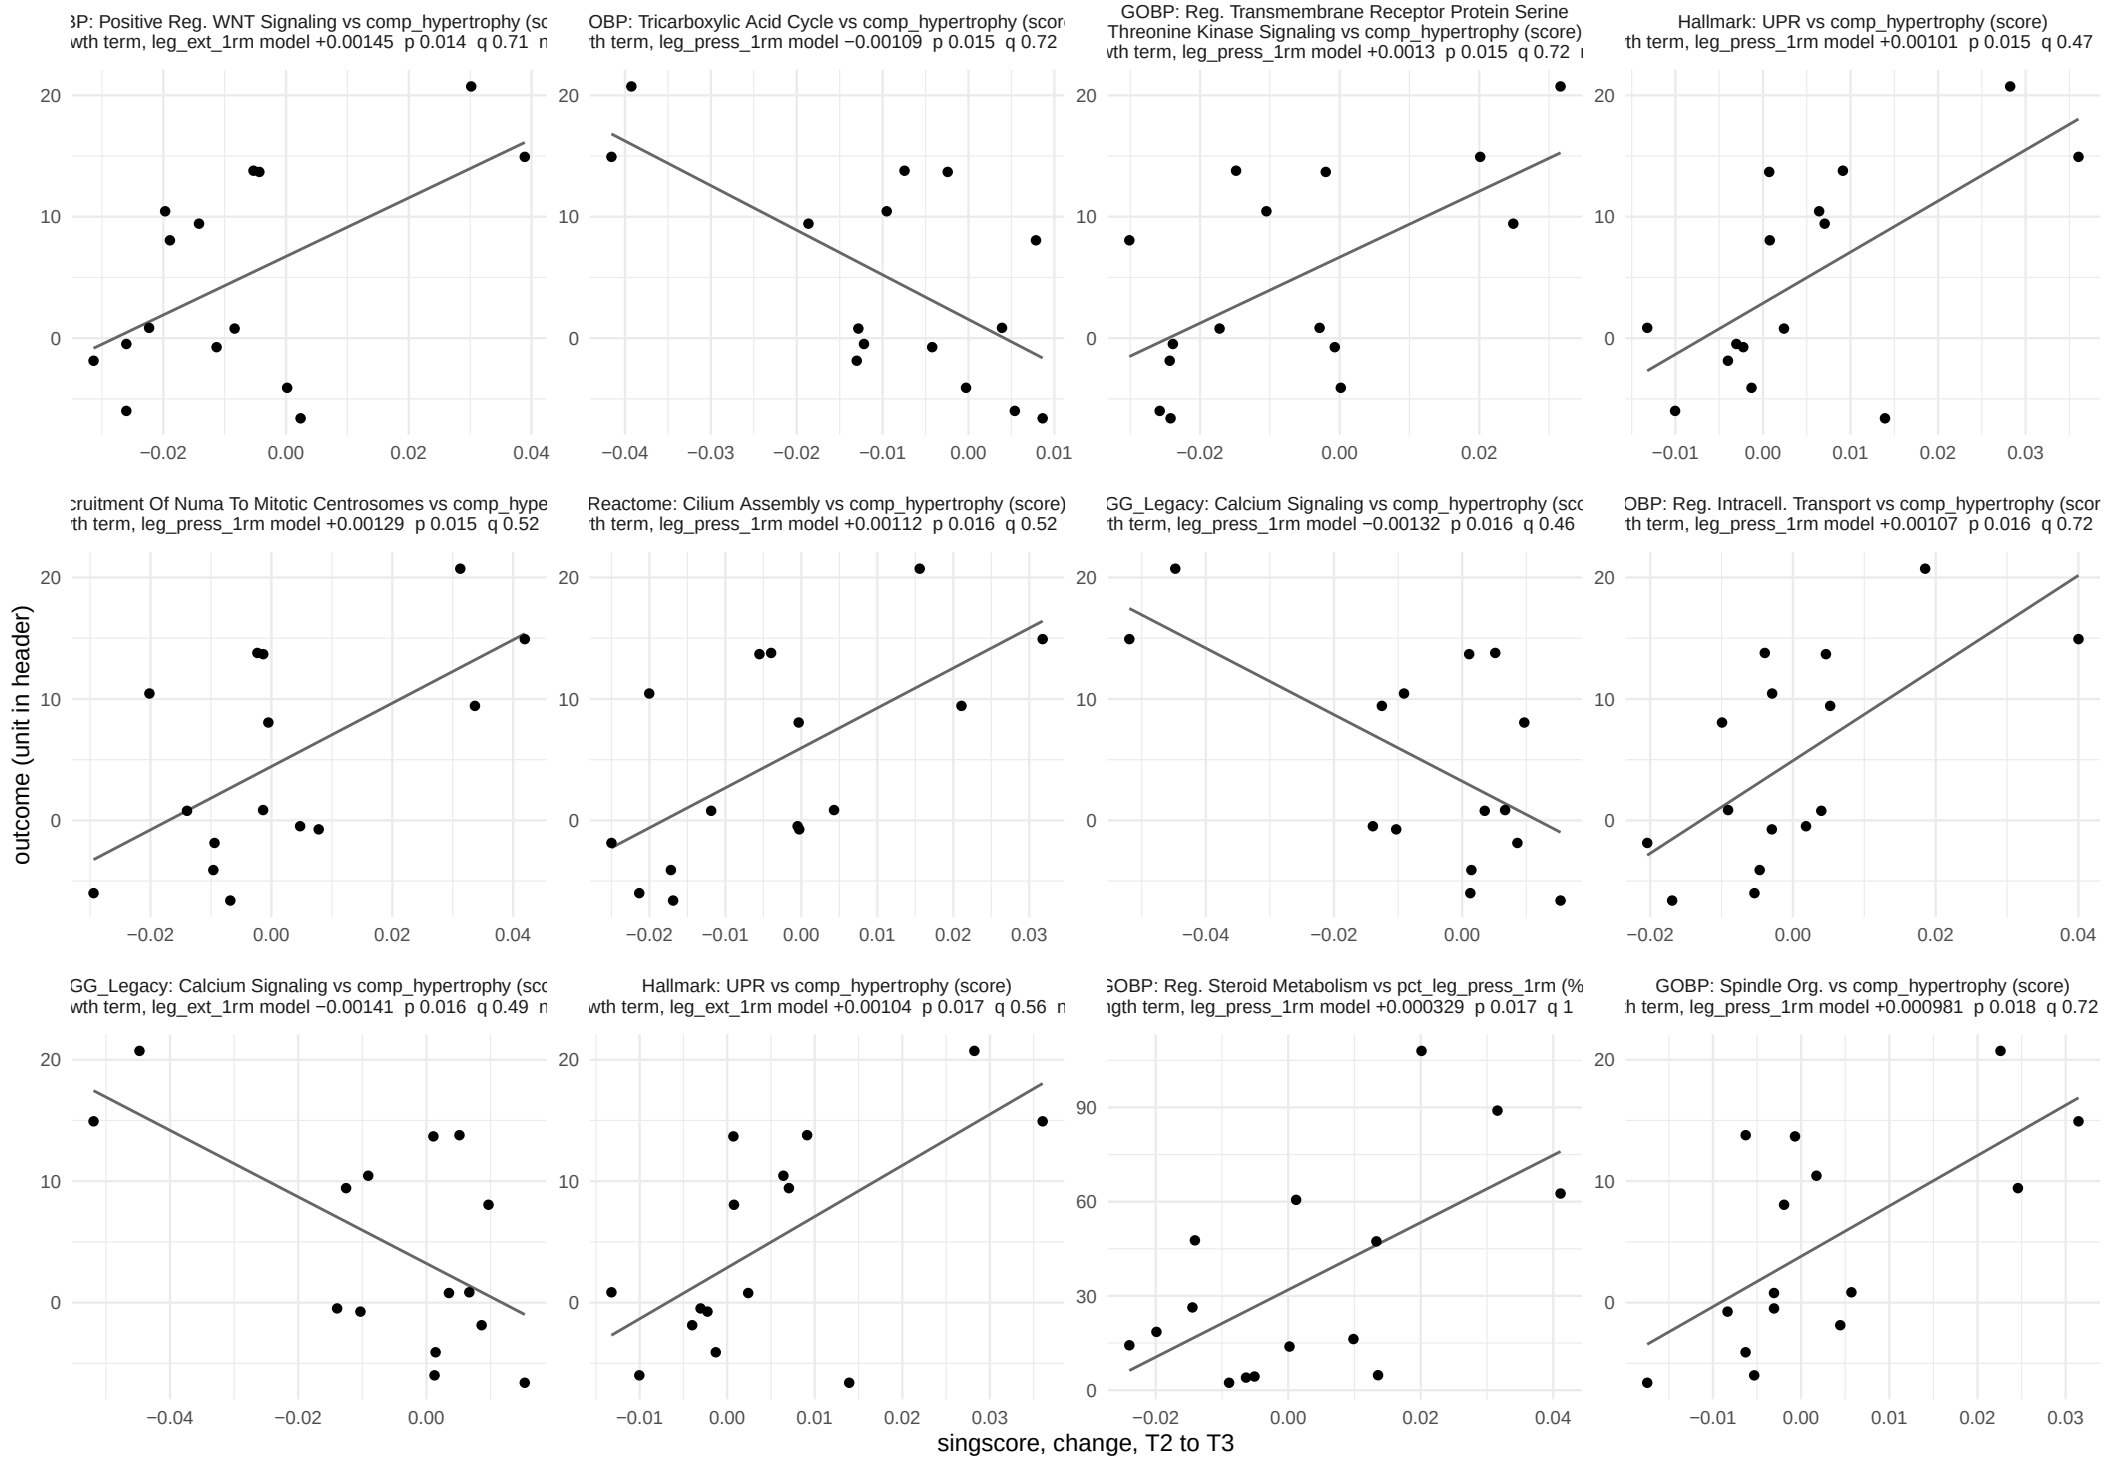

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/02_sets.xlsx, two_predictor.

Two predictor, acute window


178 of 5512 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 6 of 15.

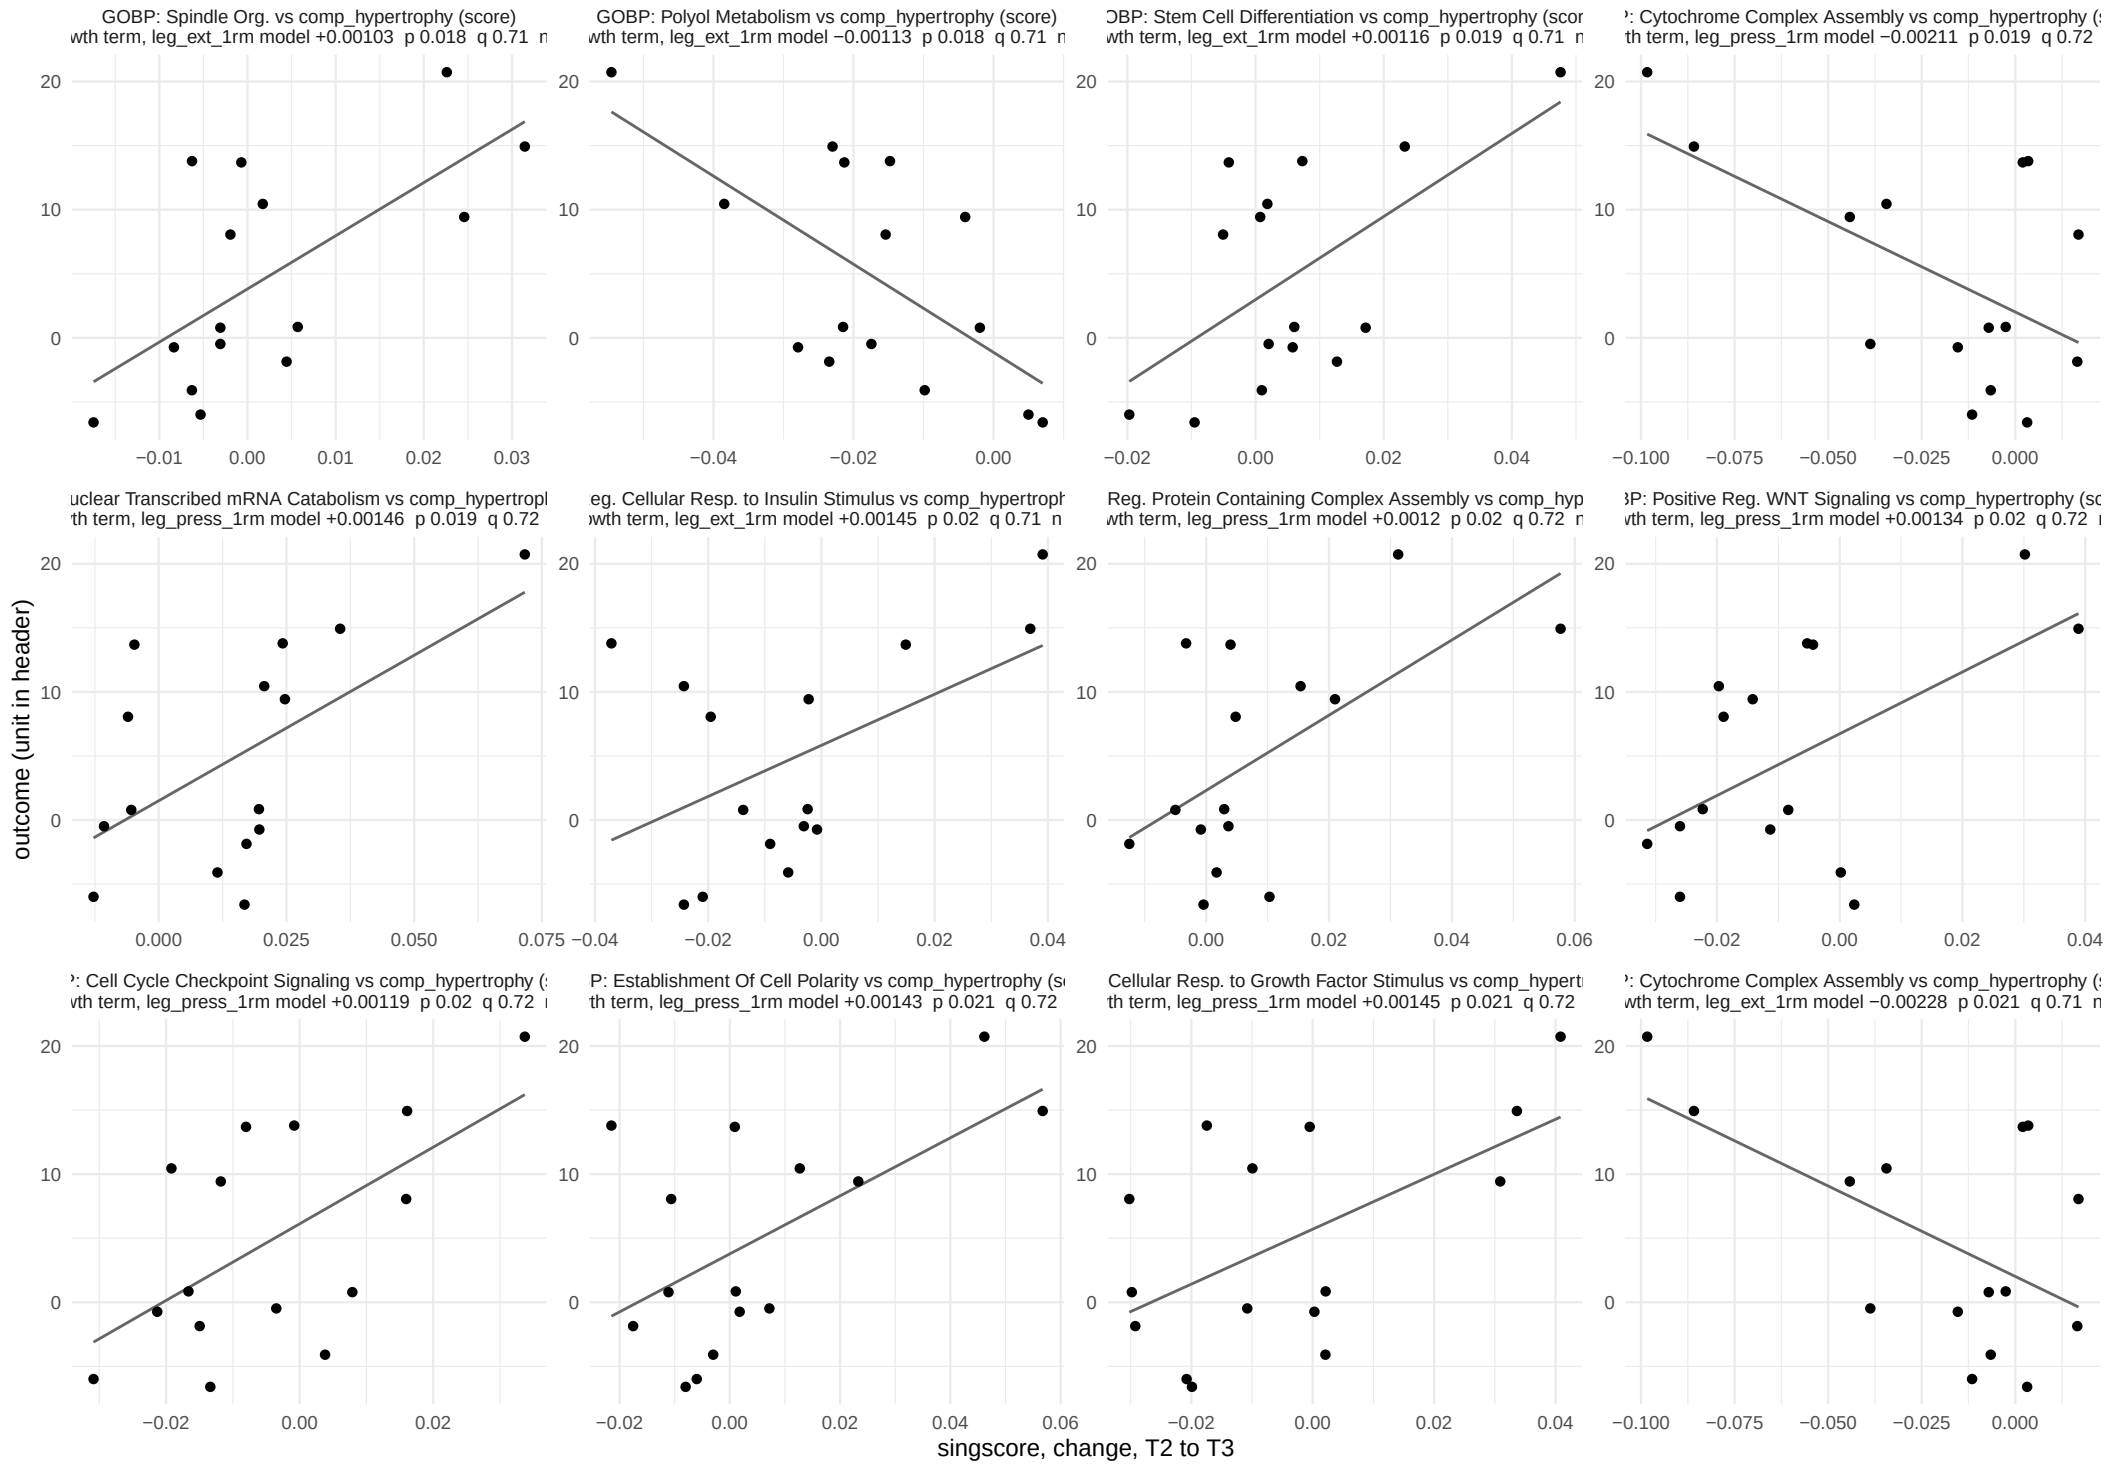

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/02_sets.xlsx, two_predictor.

Two predictor, acute window


178 of 5512 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 7 of 15.

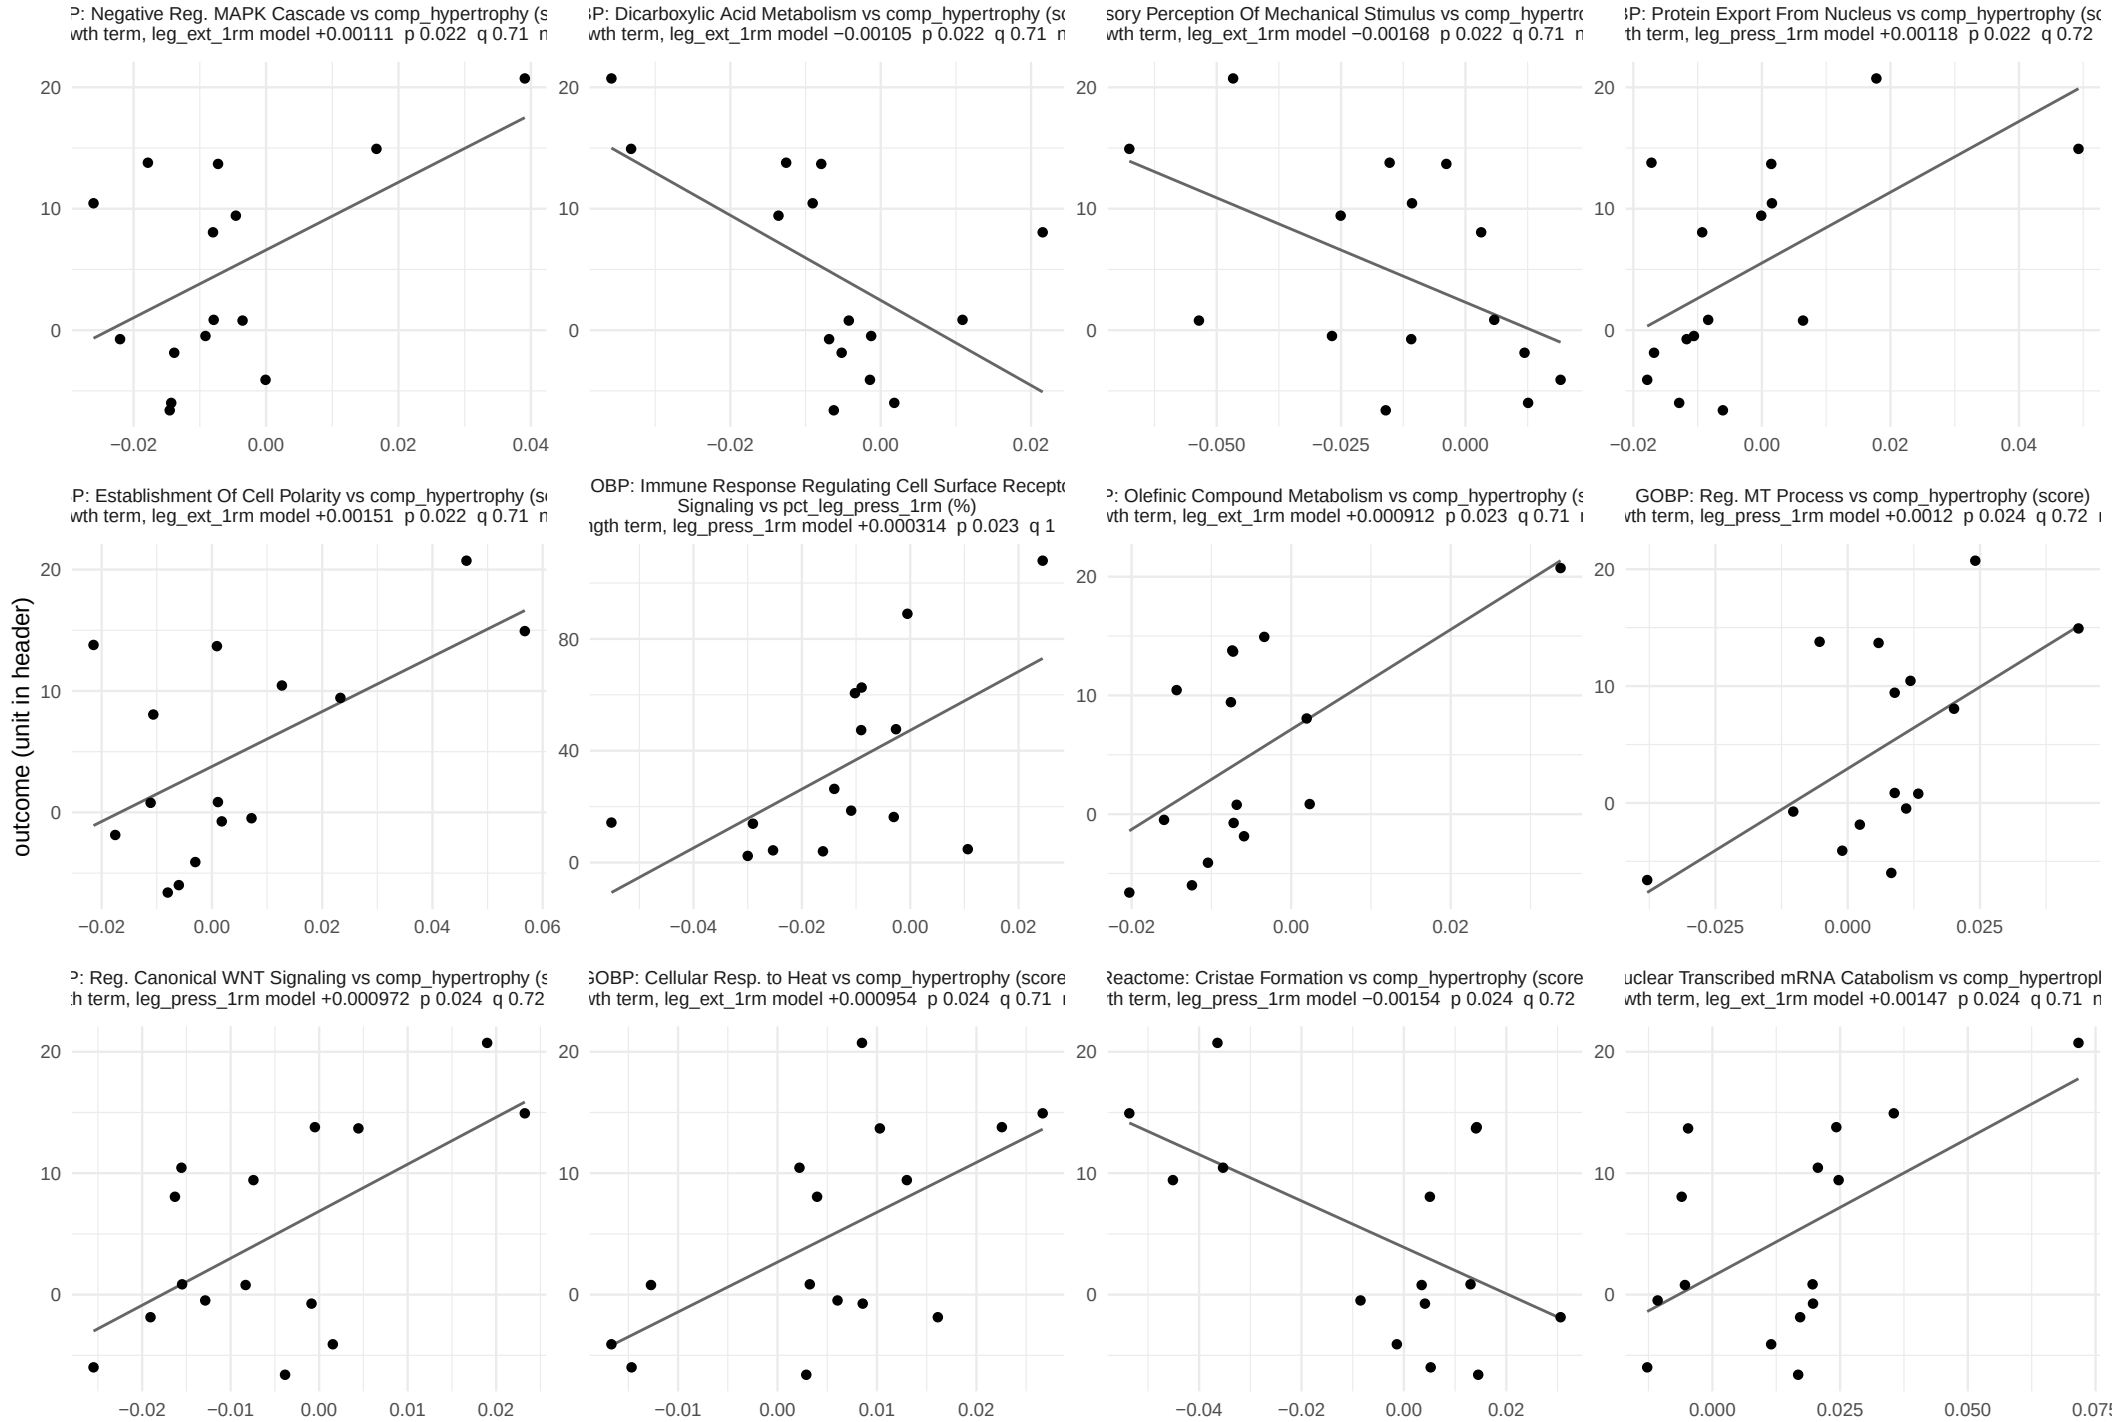

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/02_sets.xlsx, two_predictor.

Two predictor, acute window


178 of 5512 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 8 of 15.

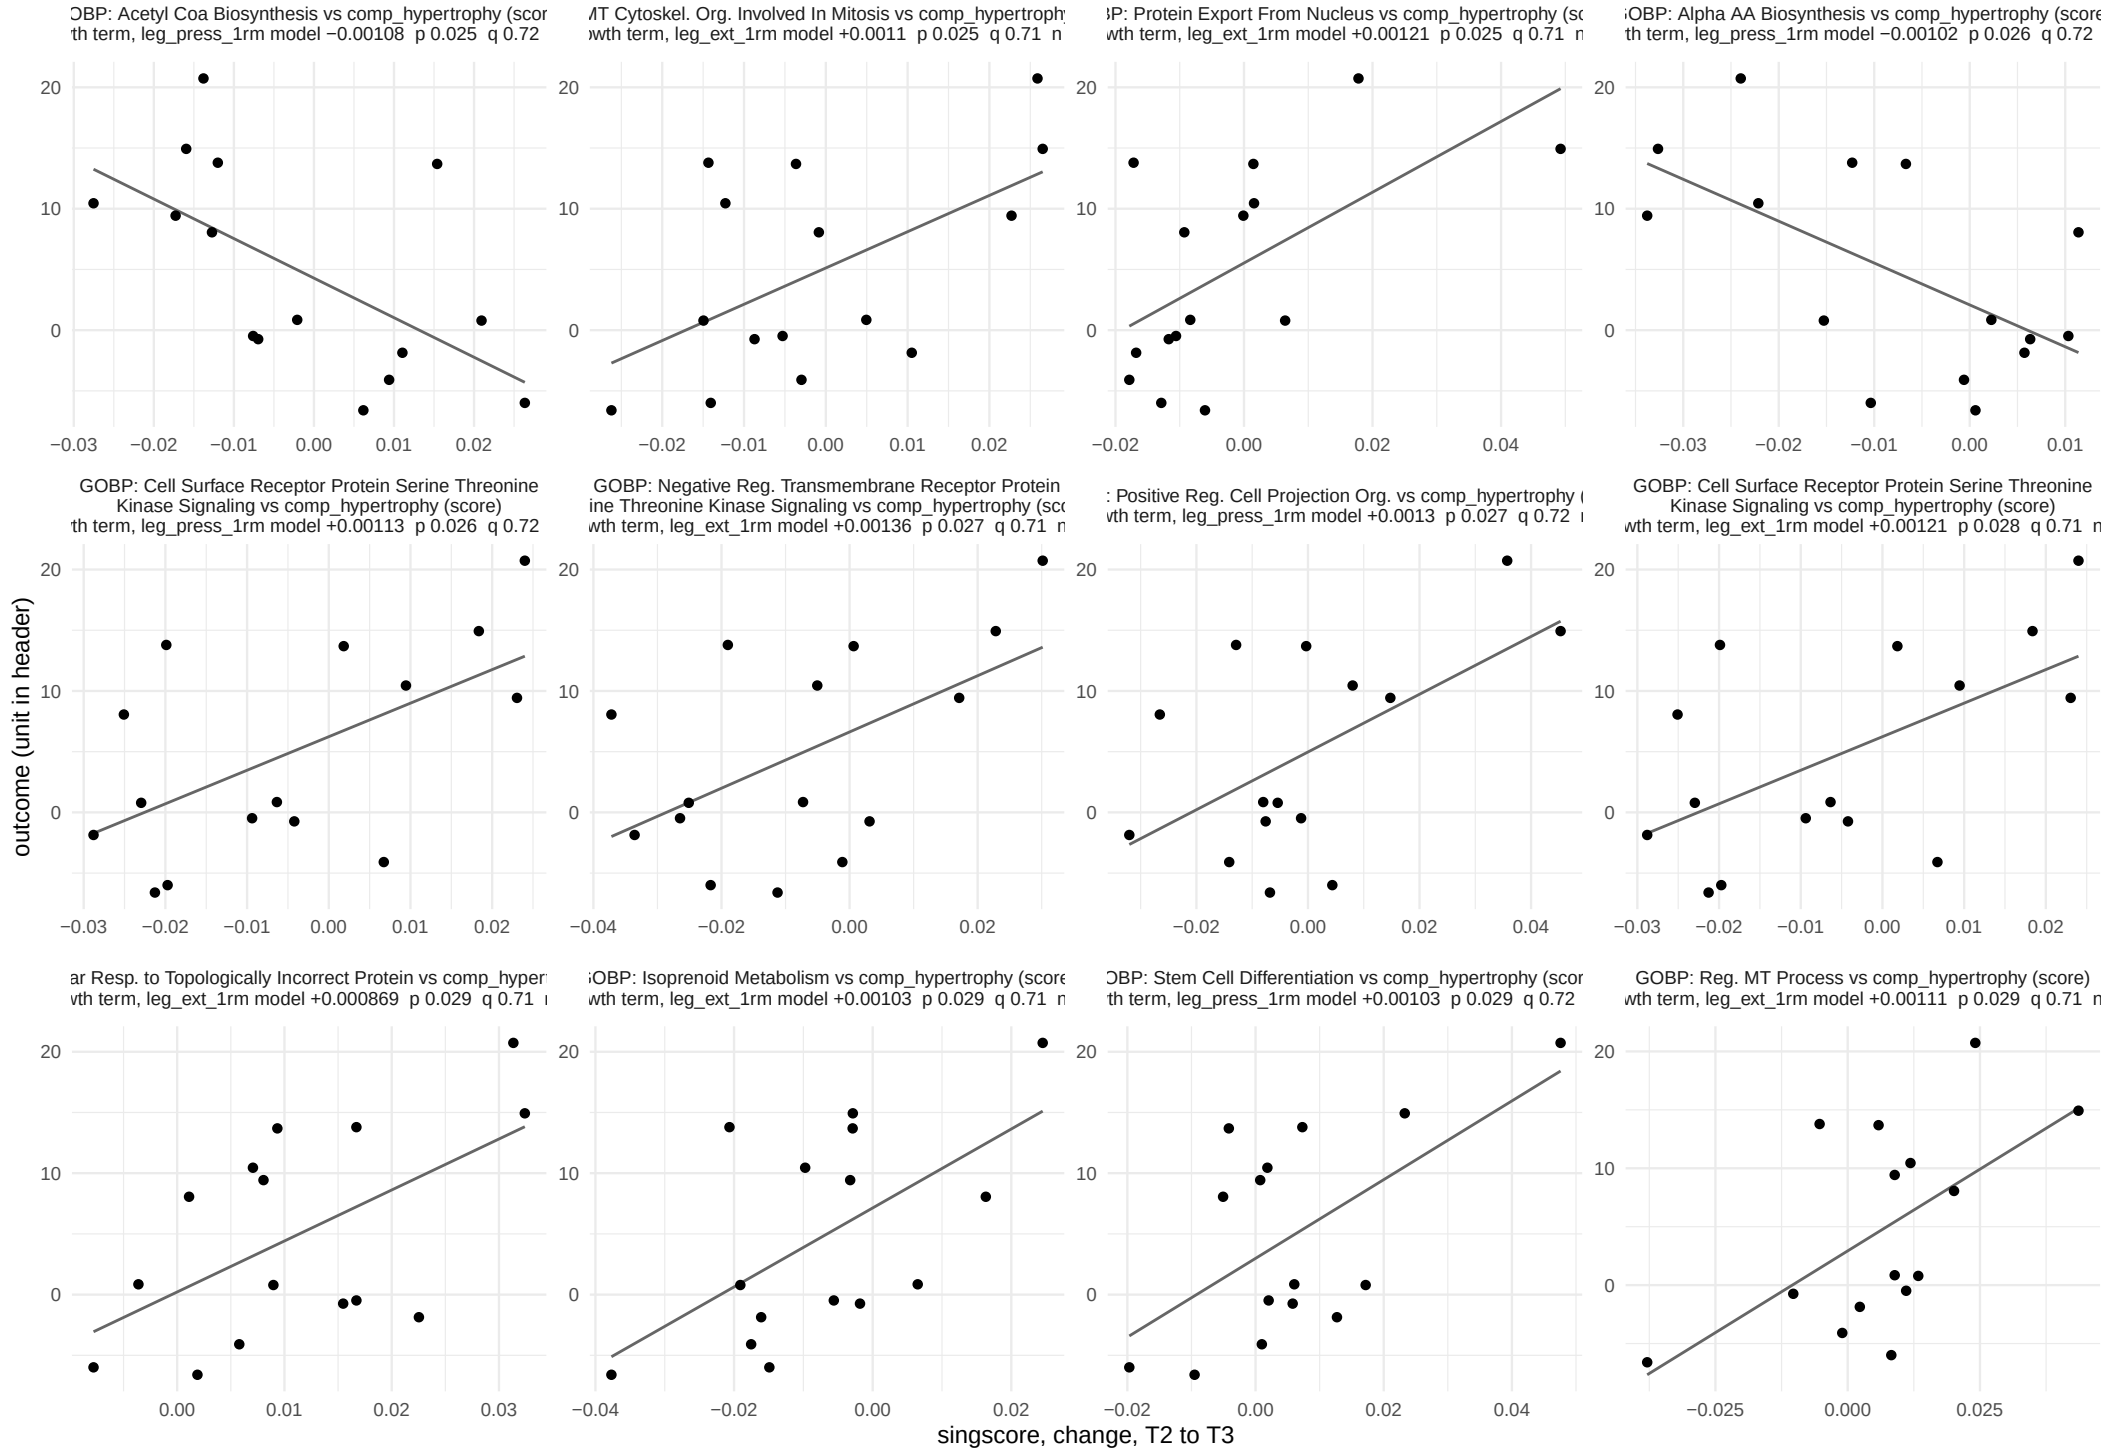

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/02_sets.xlsx, two_predictor.

Two predictor, acute window


178 of 5512 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 9 of 15.

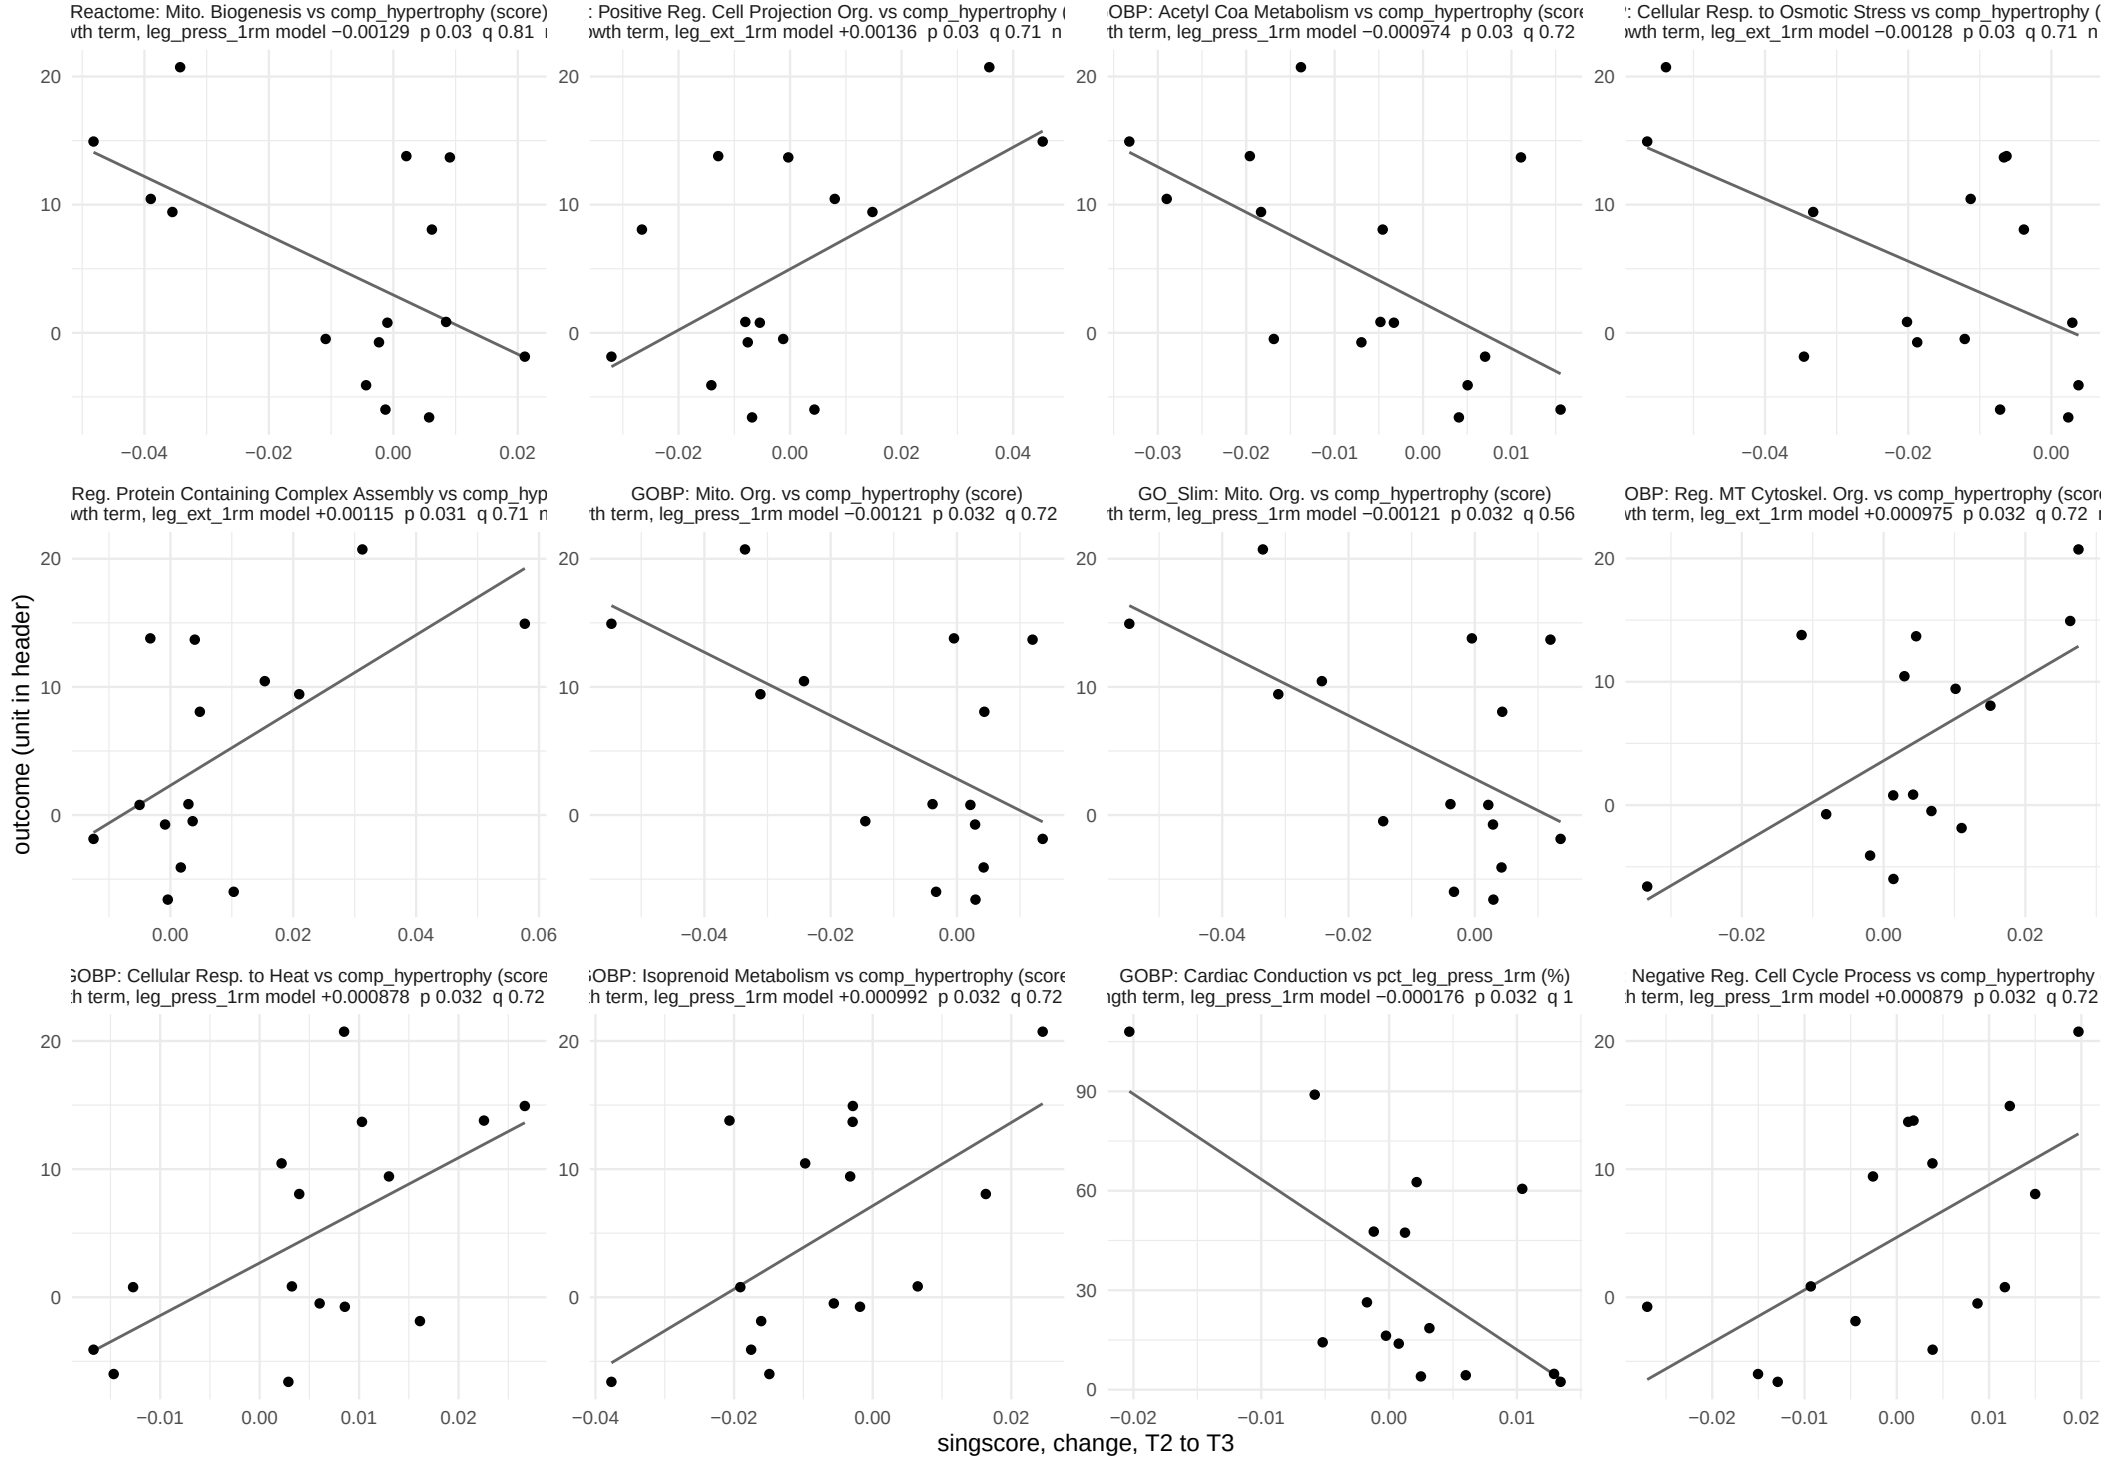

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/02_sets.xlsx, two_predictor.

Two predictor, acute window


178 of 5512 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 10 of 15.

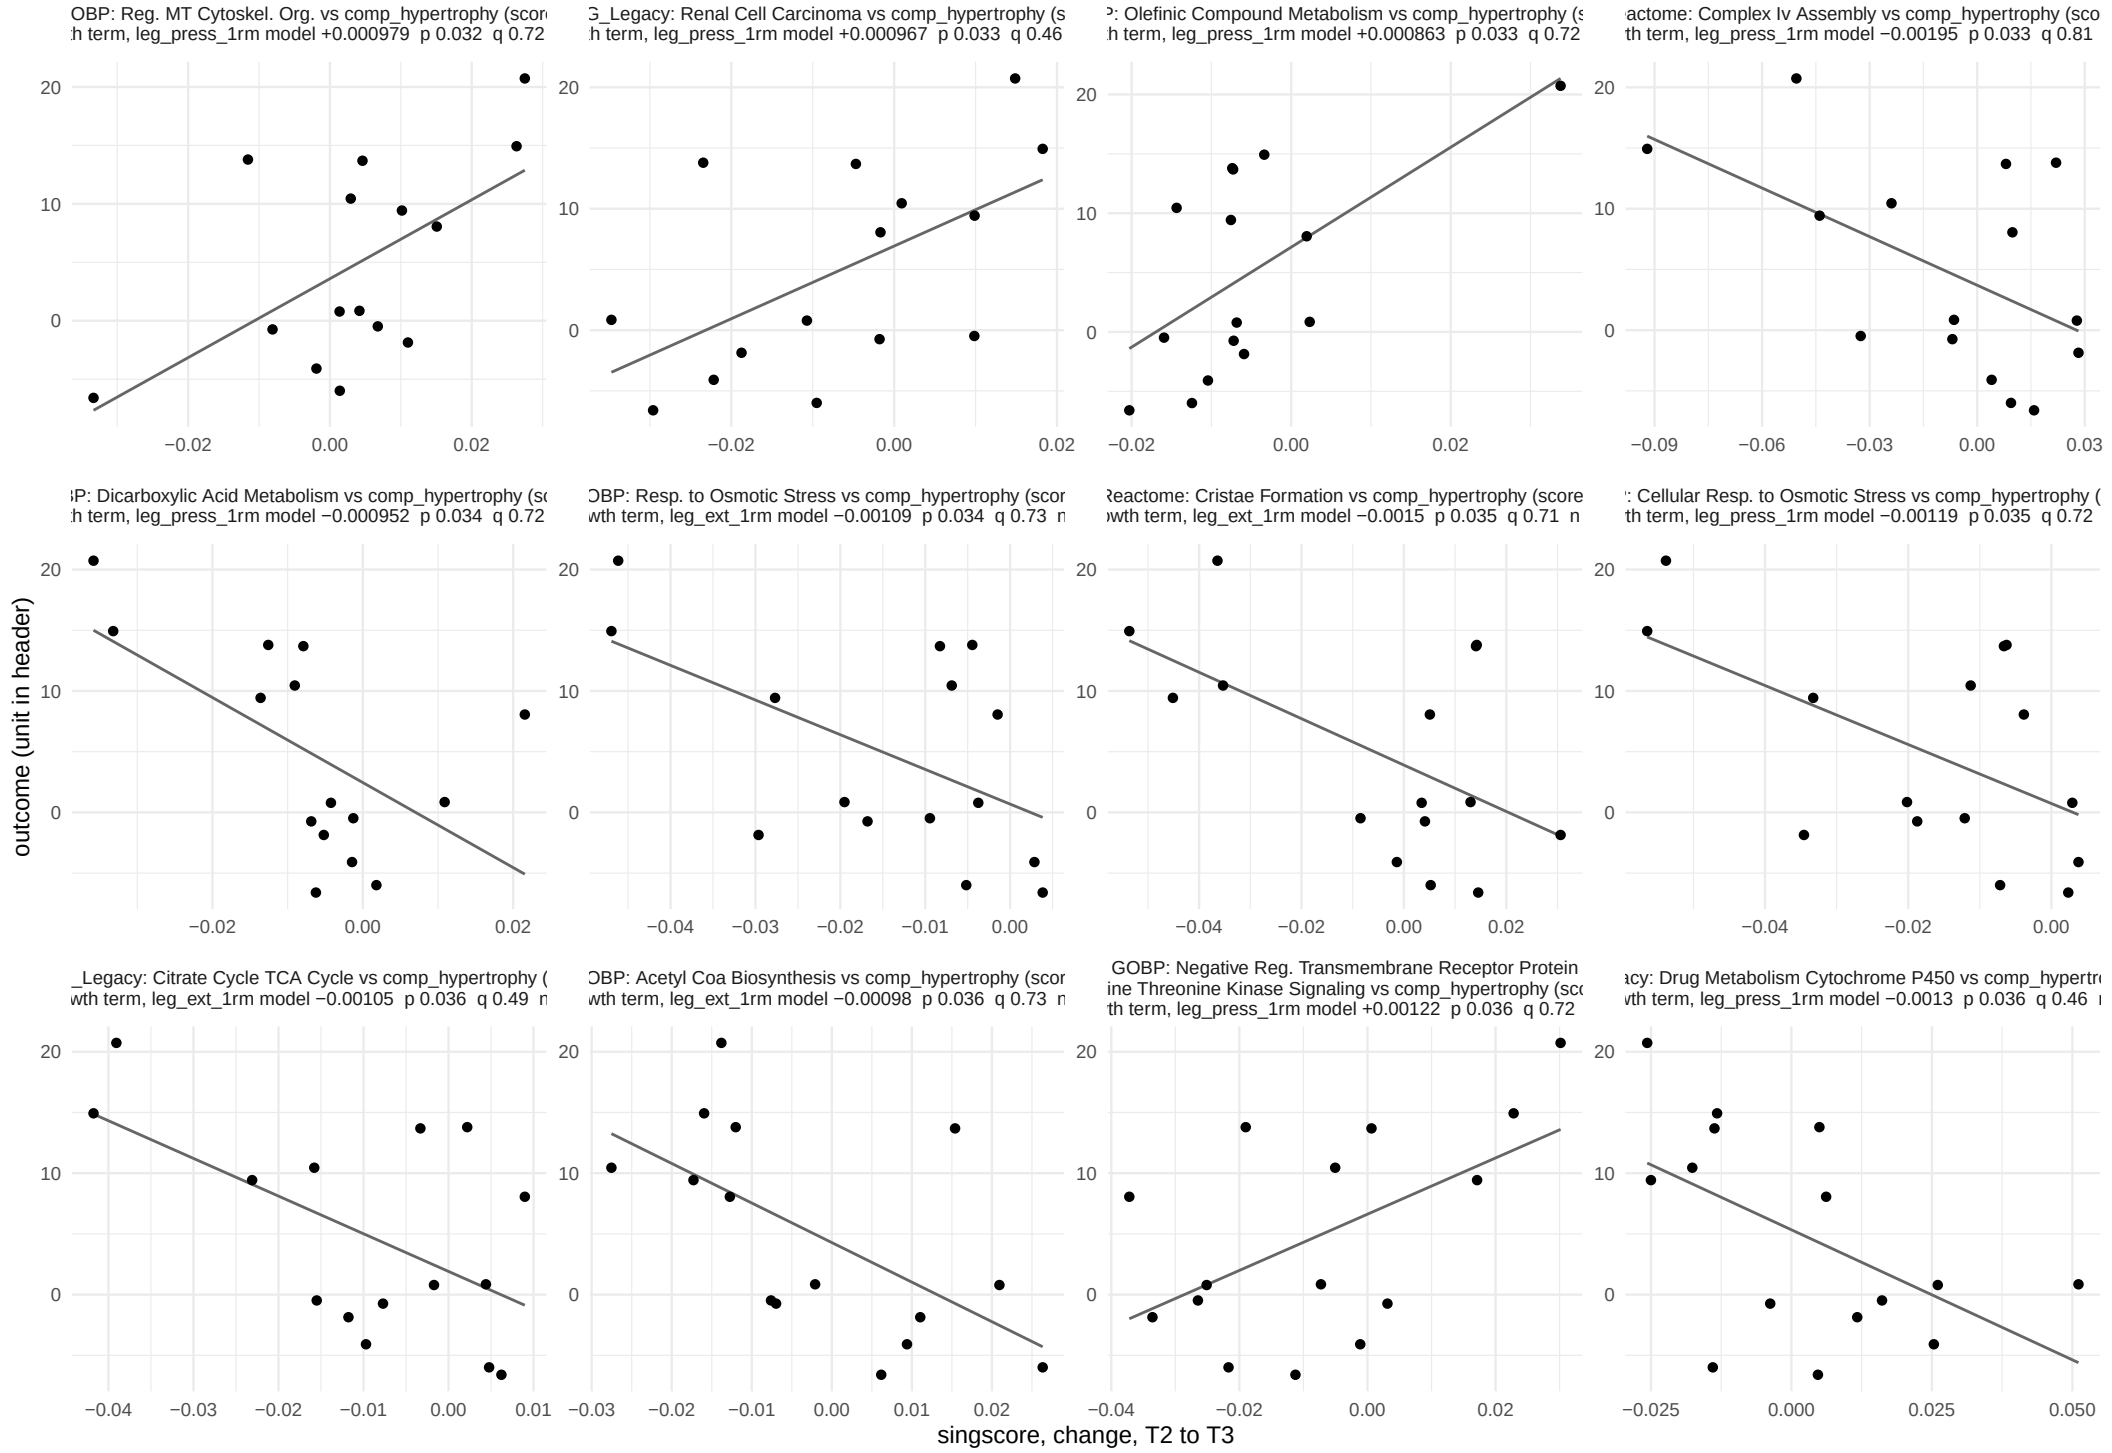

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/02_sets.xlsx, two_predictor.

Two predictor, acute window


178 of 5512 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 11 of 15.

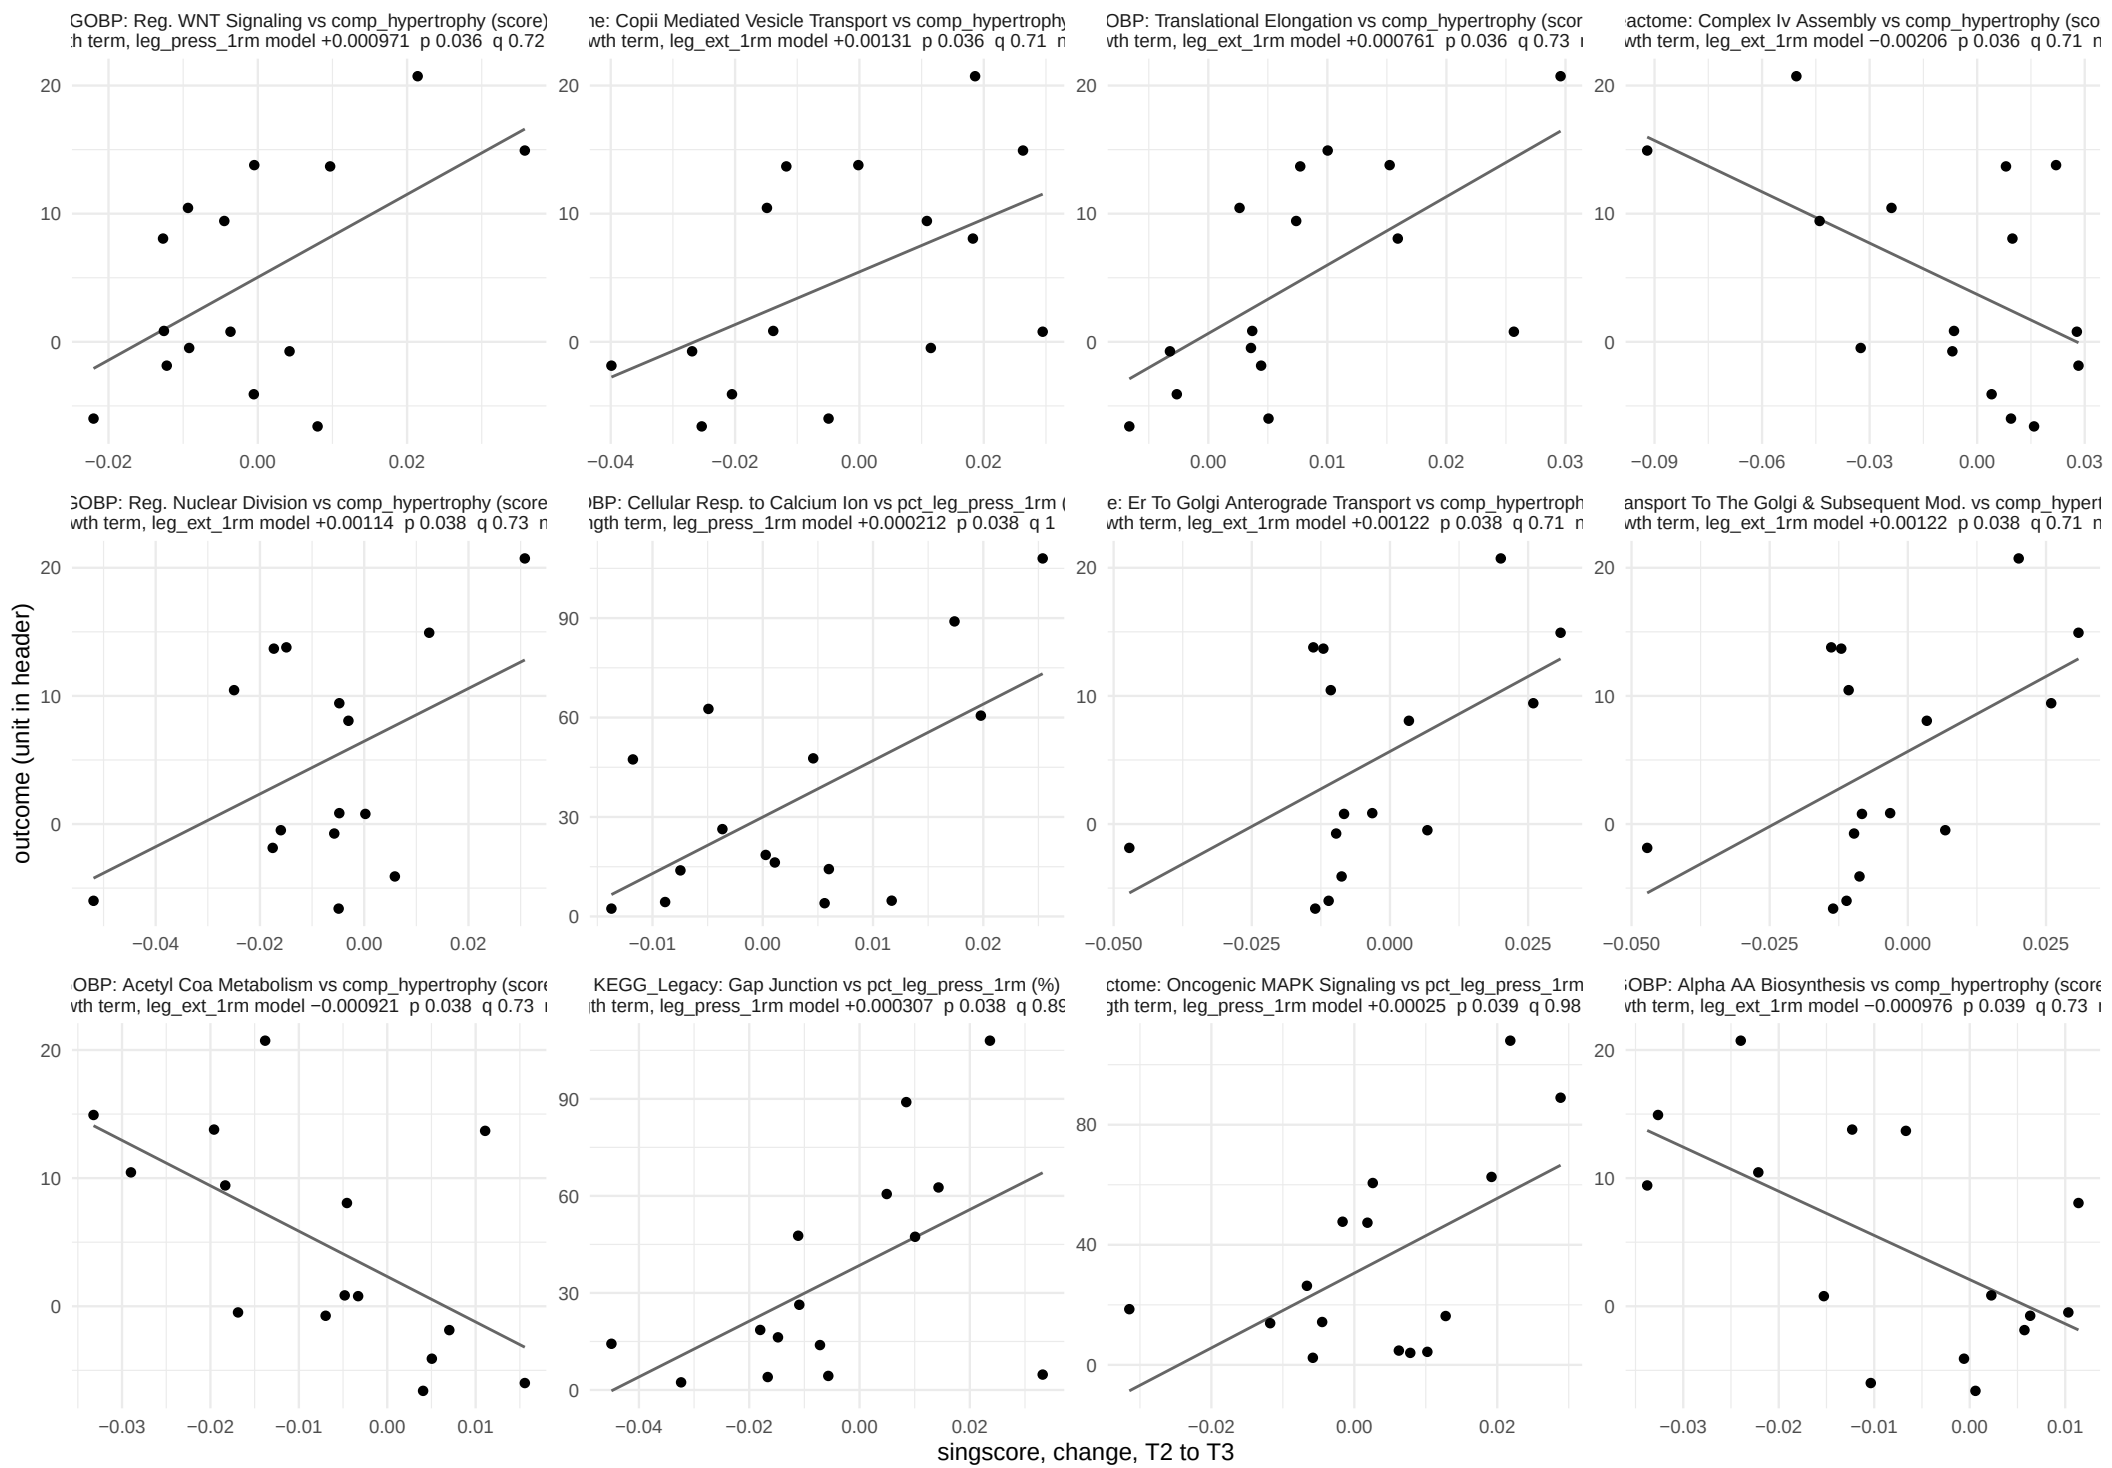

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/02_sets.xlsx, two_predictor.

Two predictor, acute window


178 of 5512 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 12 of 15.

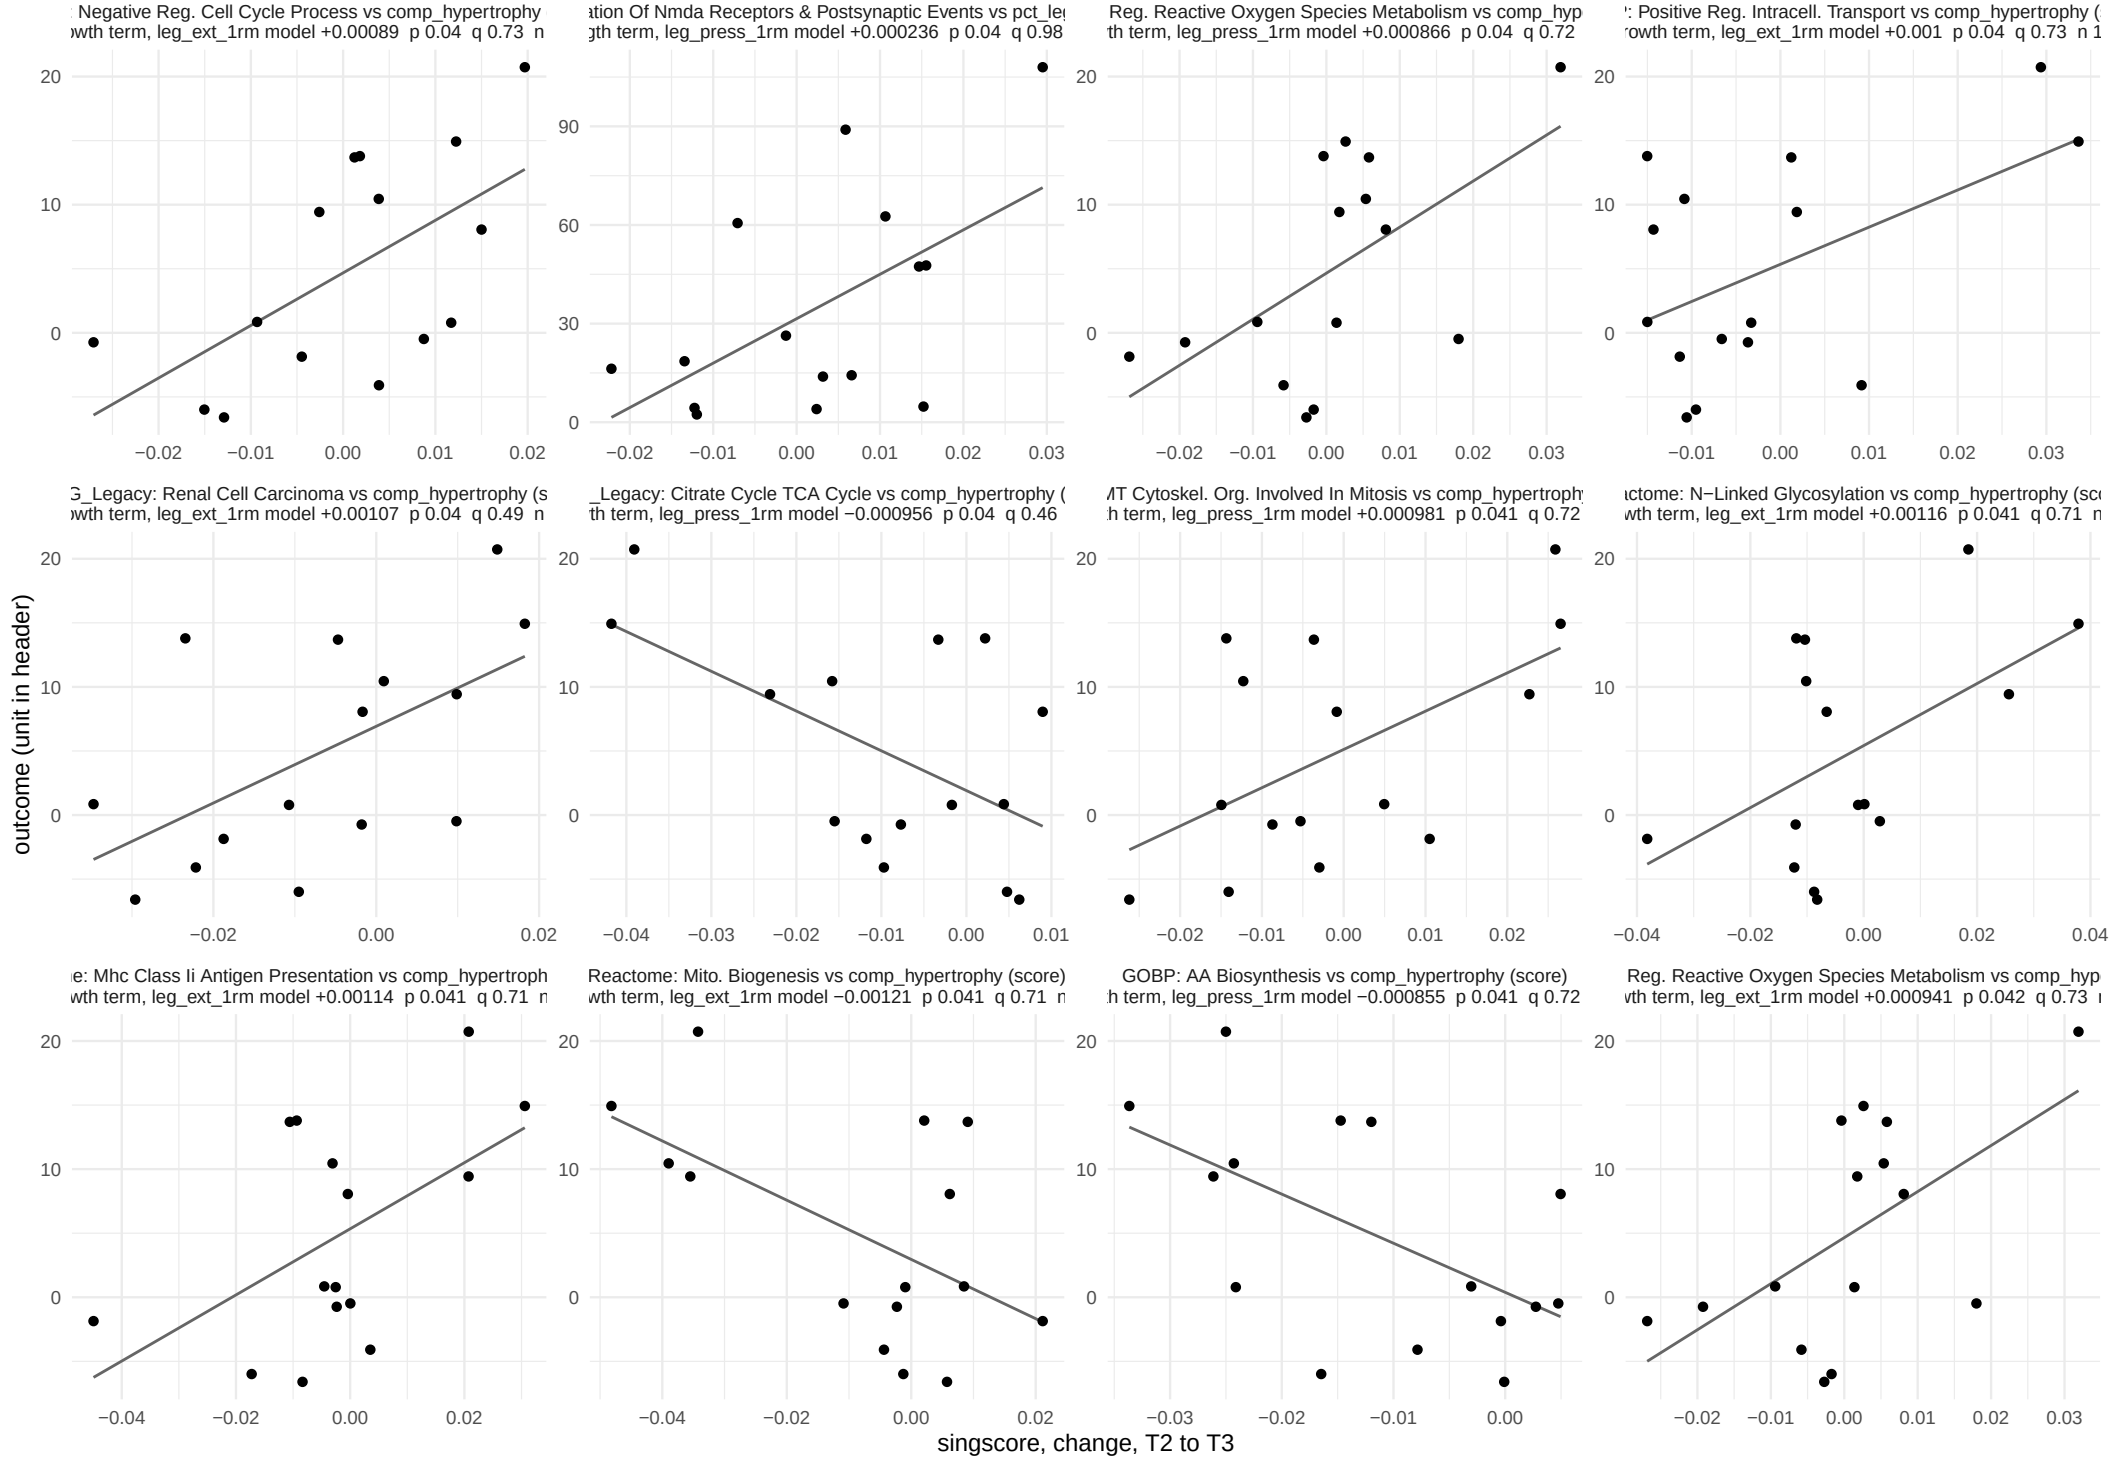

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/02_sets.xlsx, two_predictor.

Two predictor, acute window


178 of 5512 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 13 of 15.

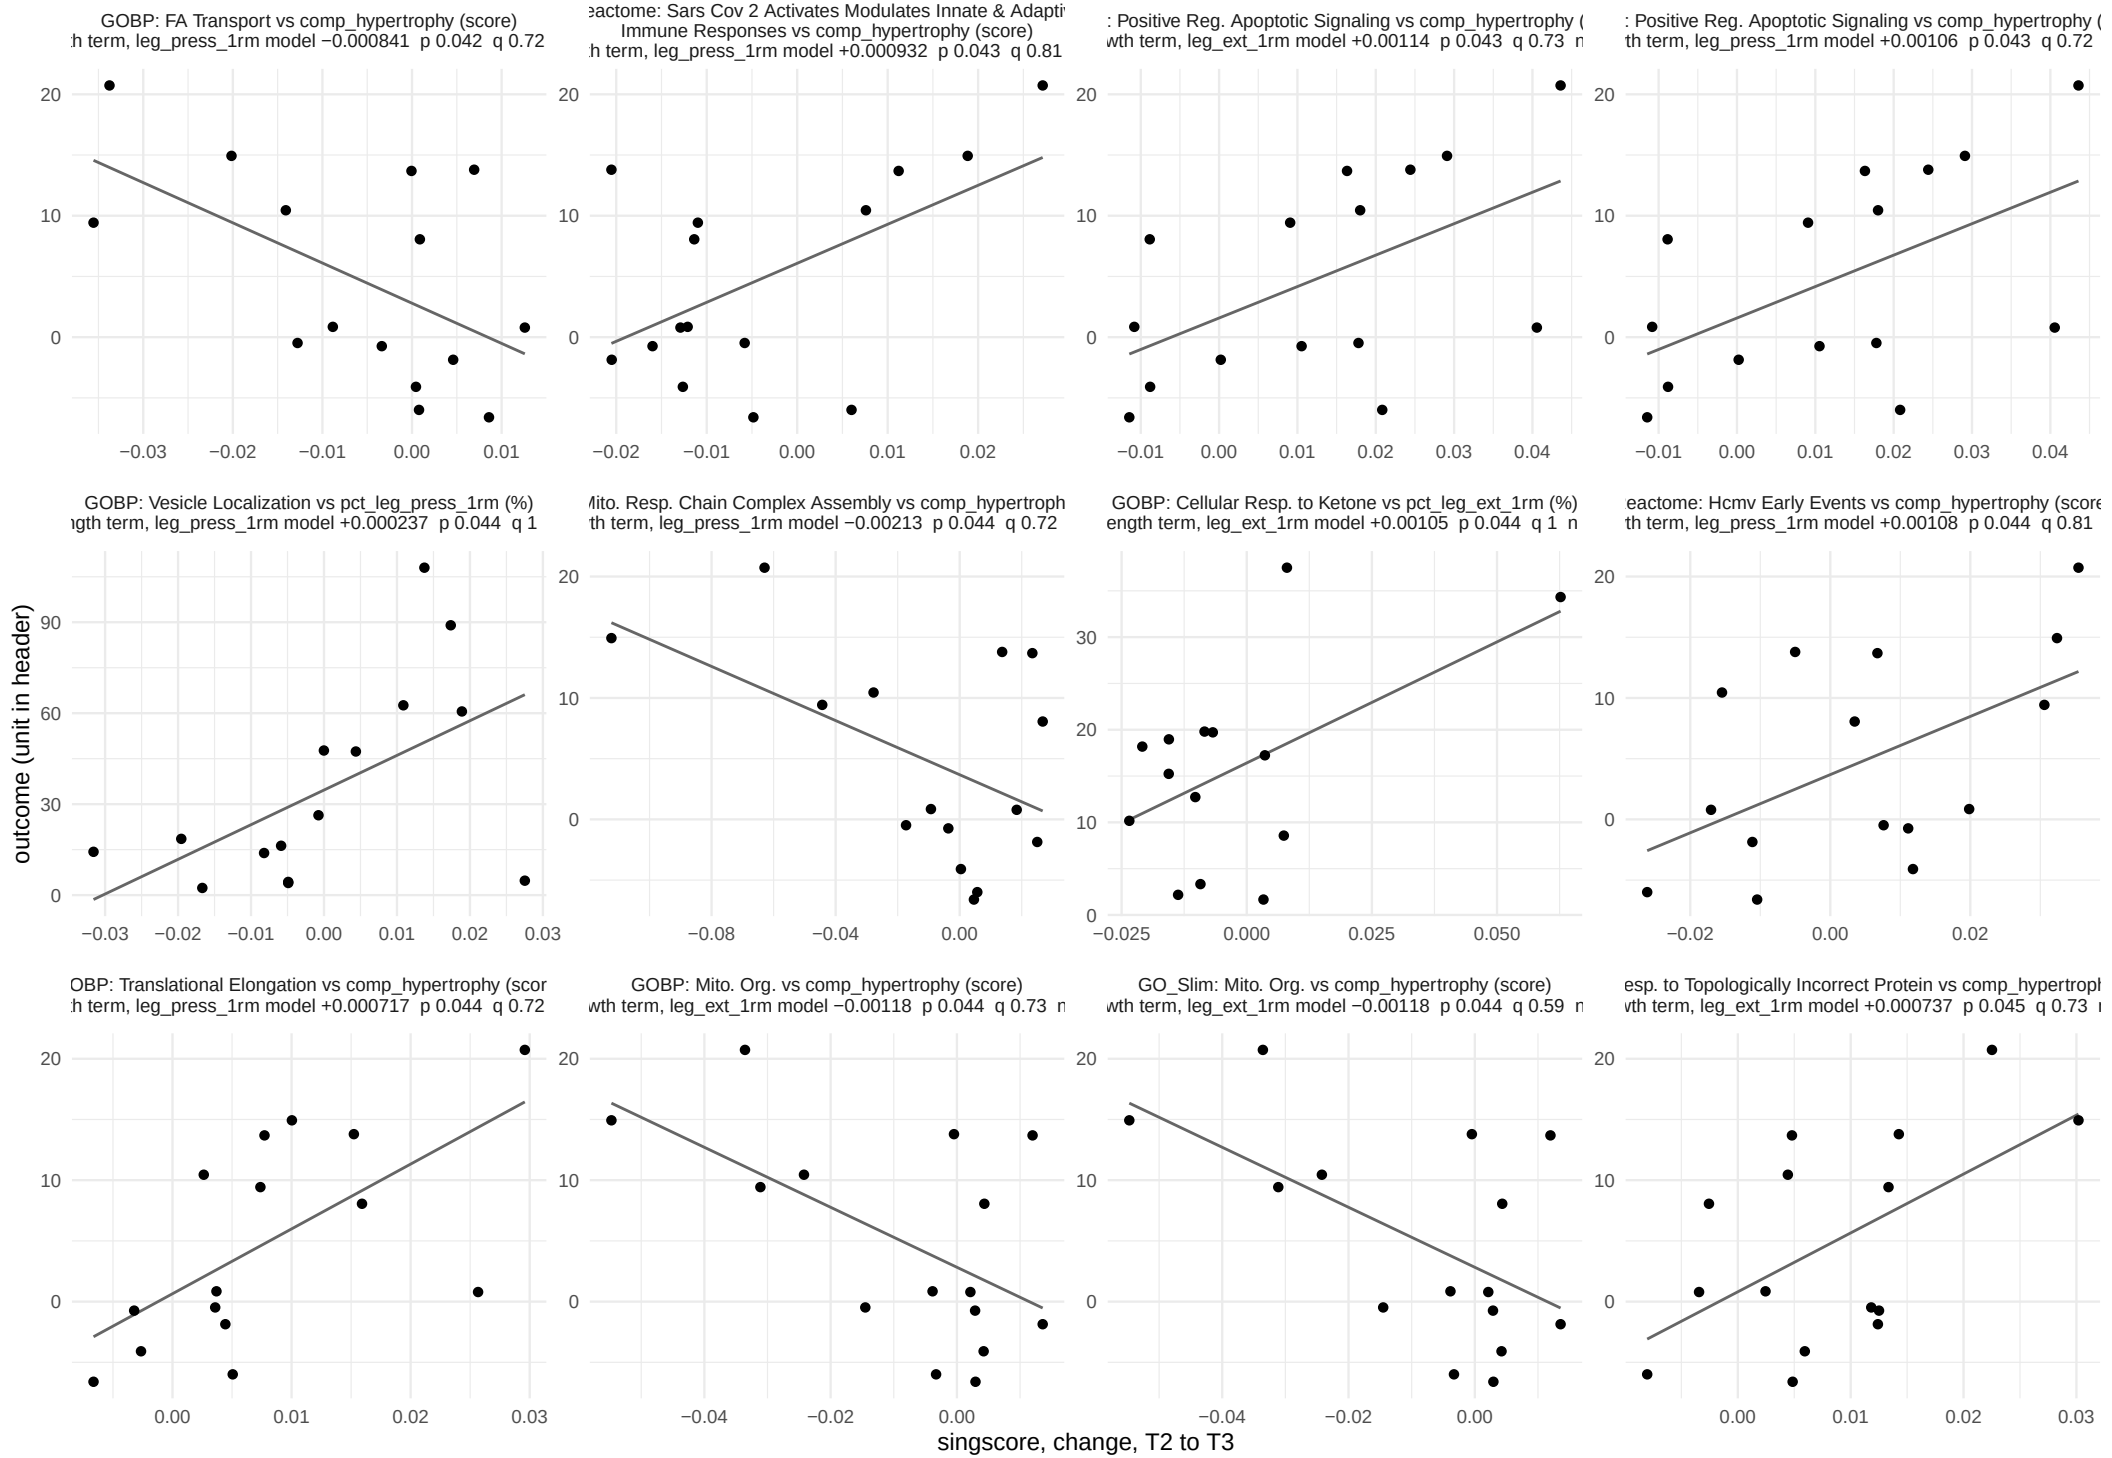

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/02_sets.xlsx, two_predictor.

Two predictor, acute window


178 of 5512 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 14 of 15.

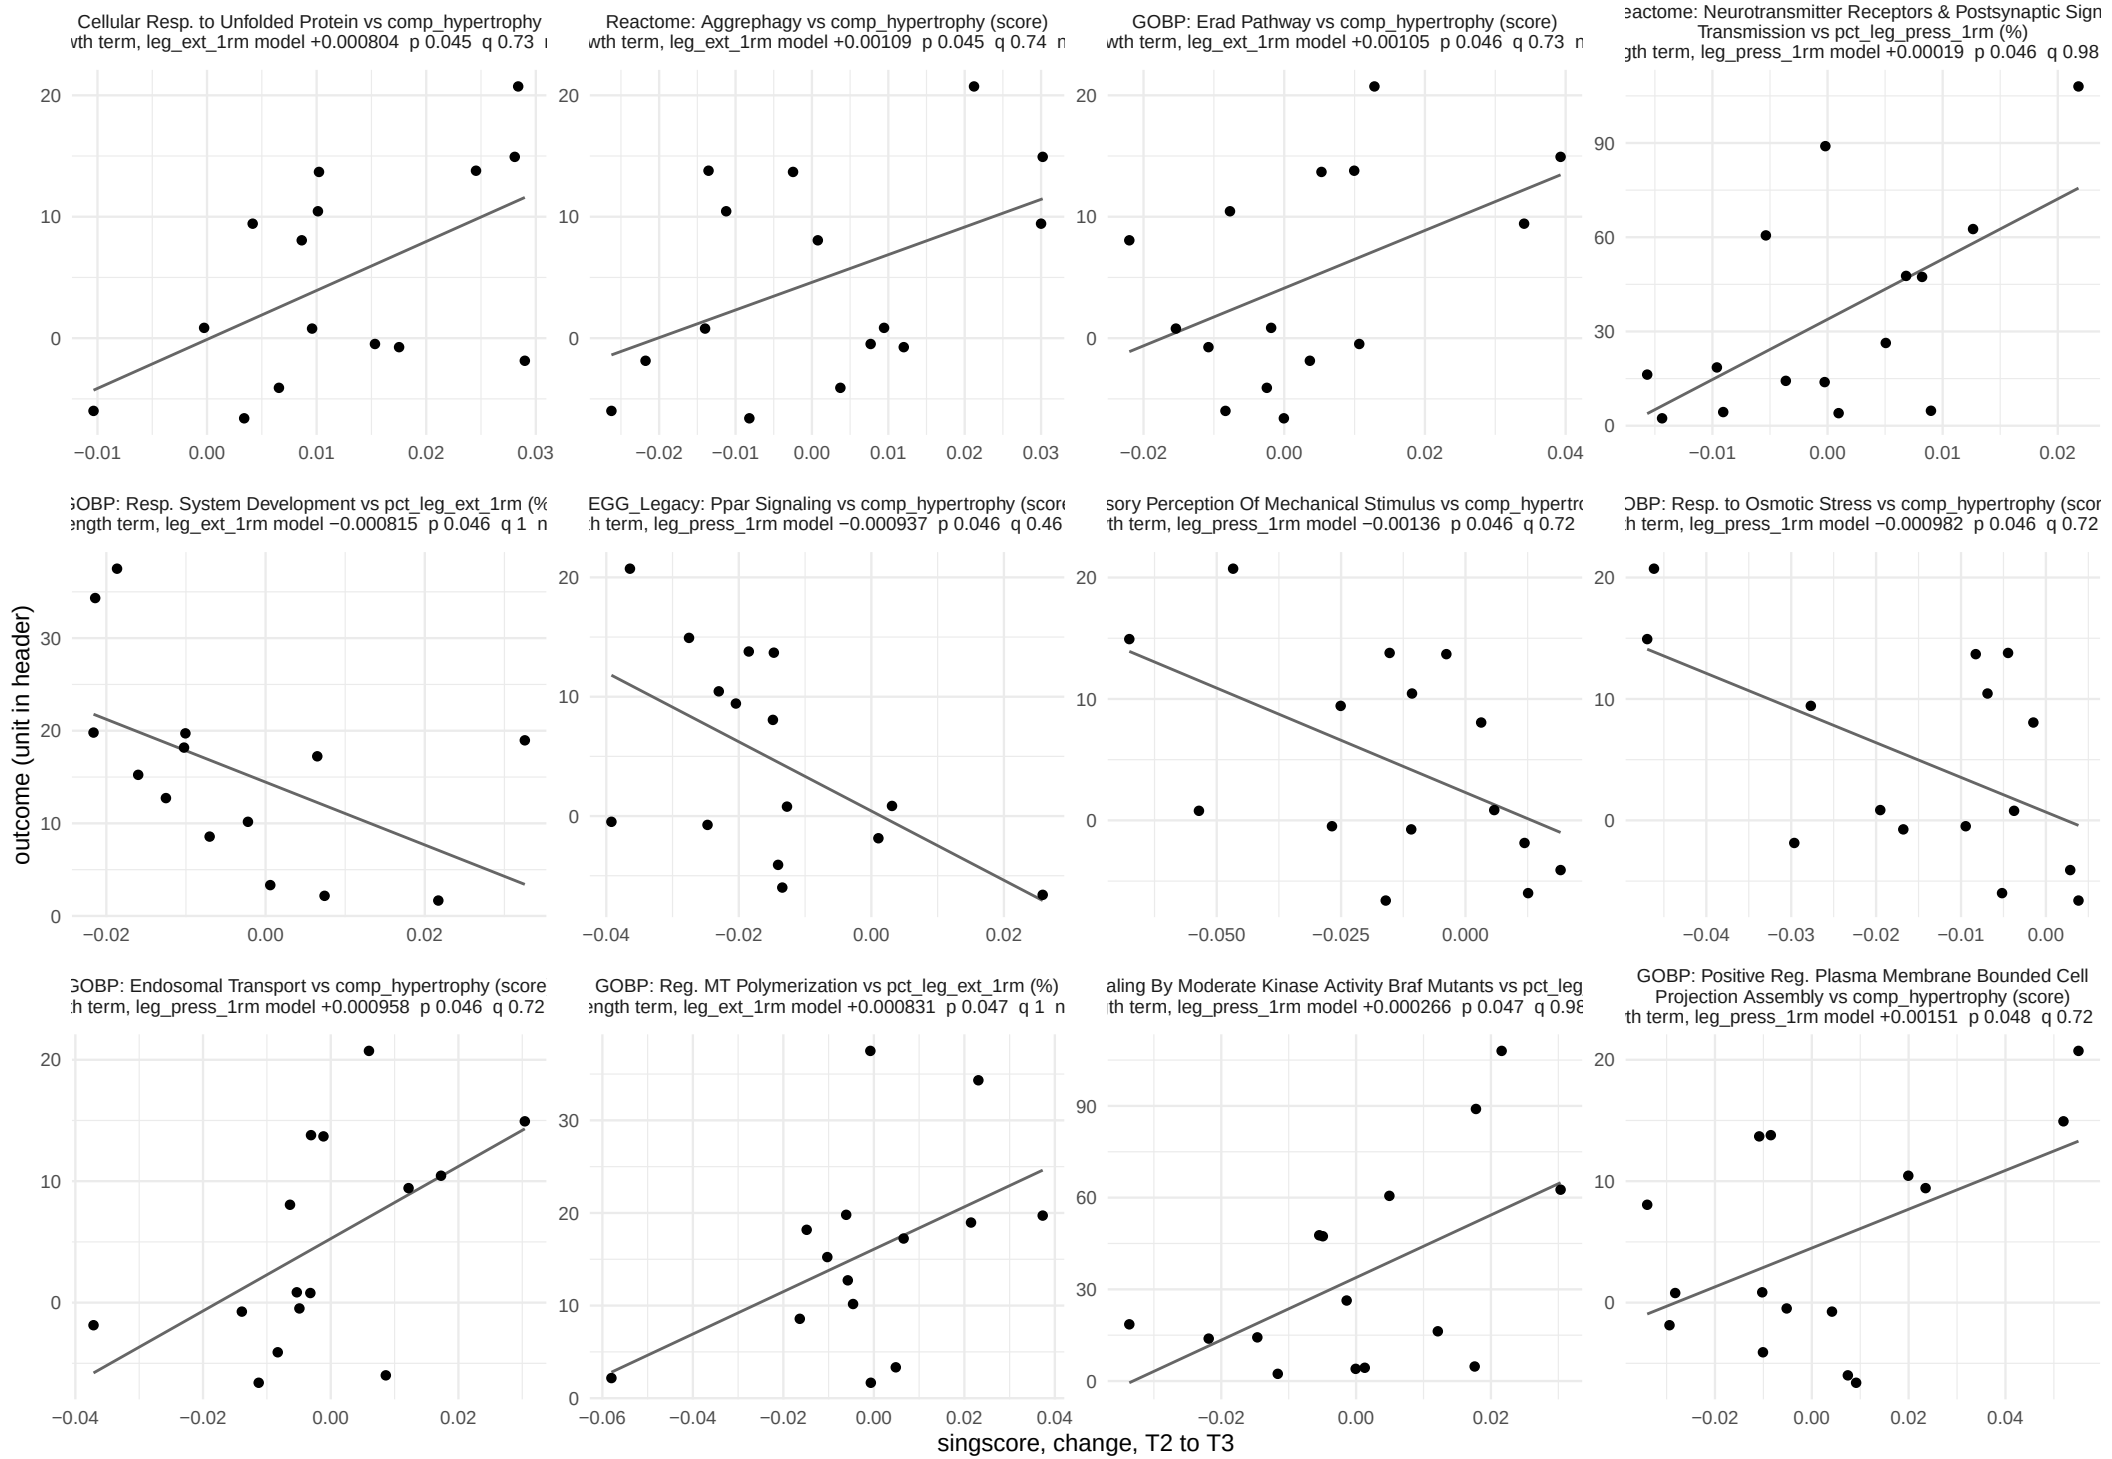

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/02_sets.xlsx, two_predictor.

Two predictor, acute window

178 of 5512 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 15 of 15.

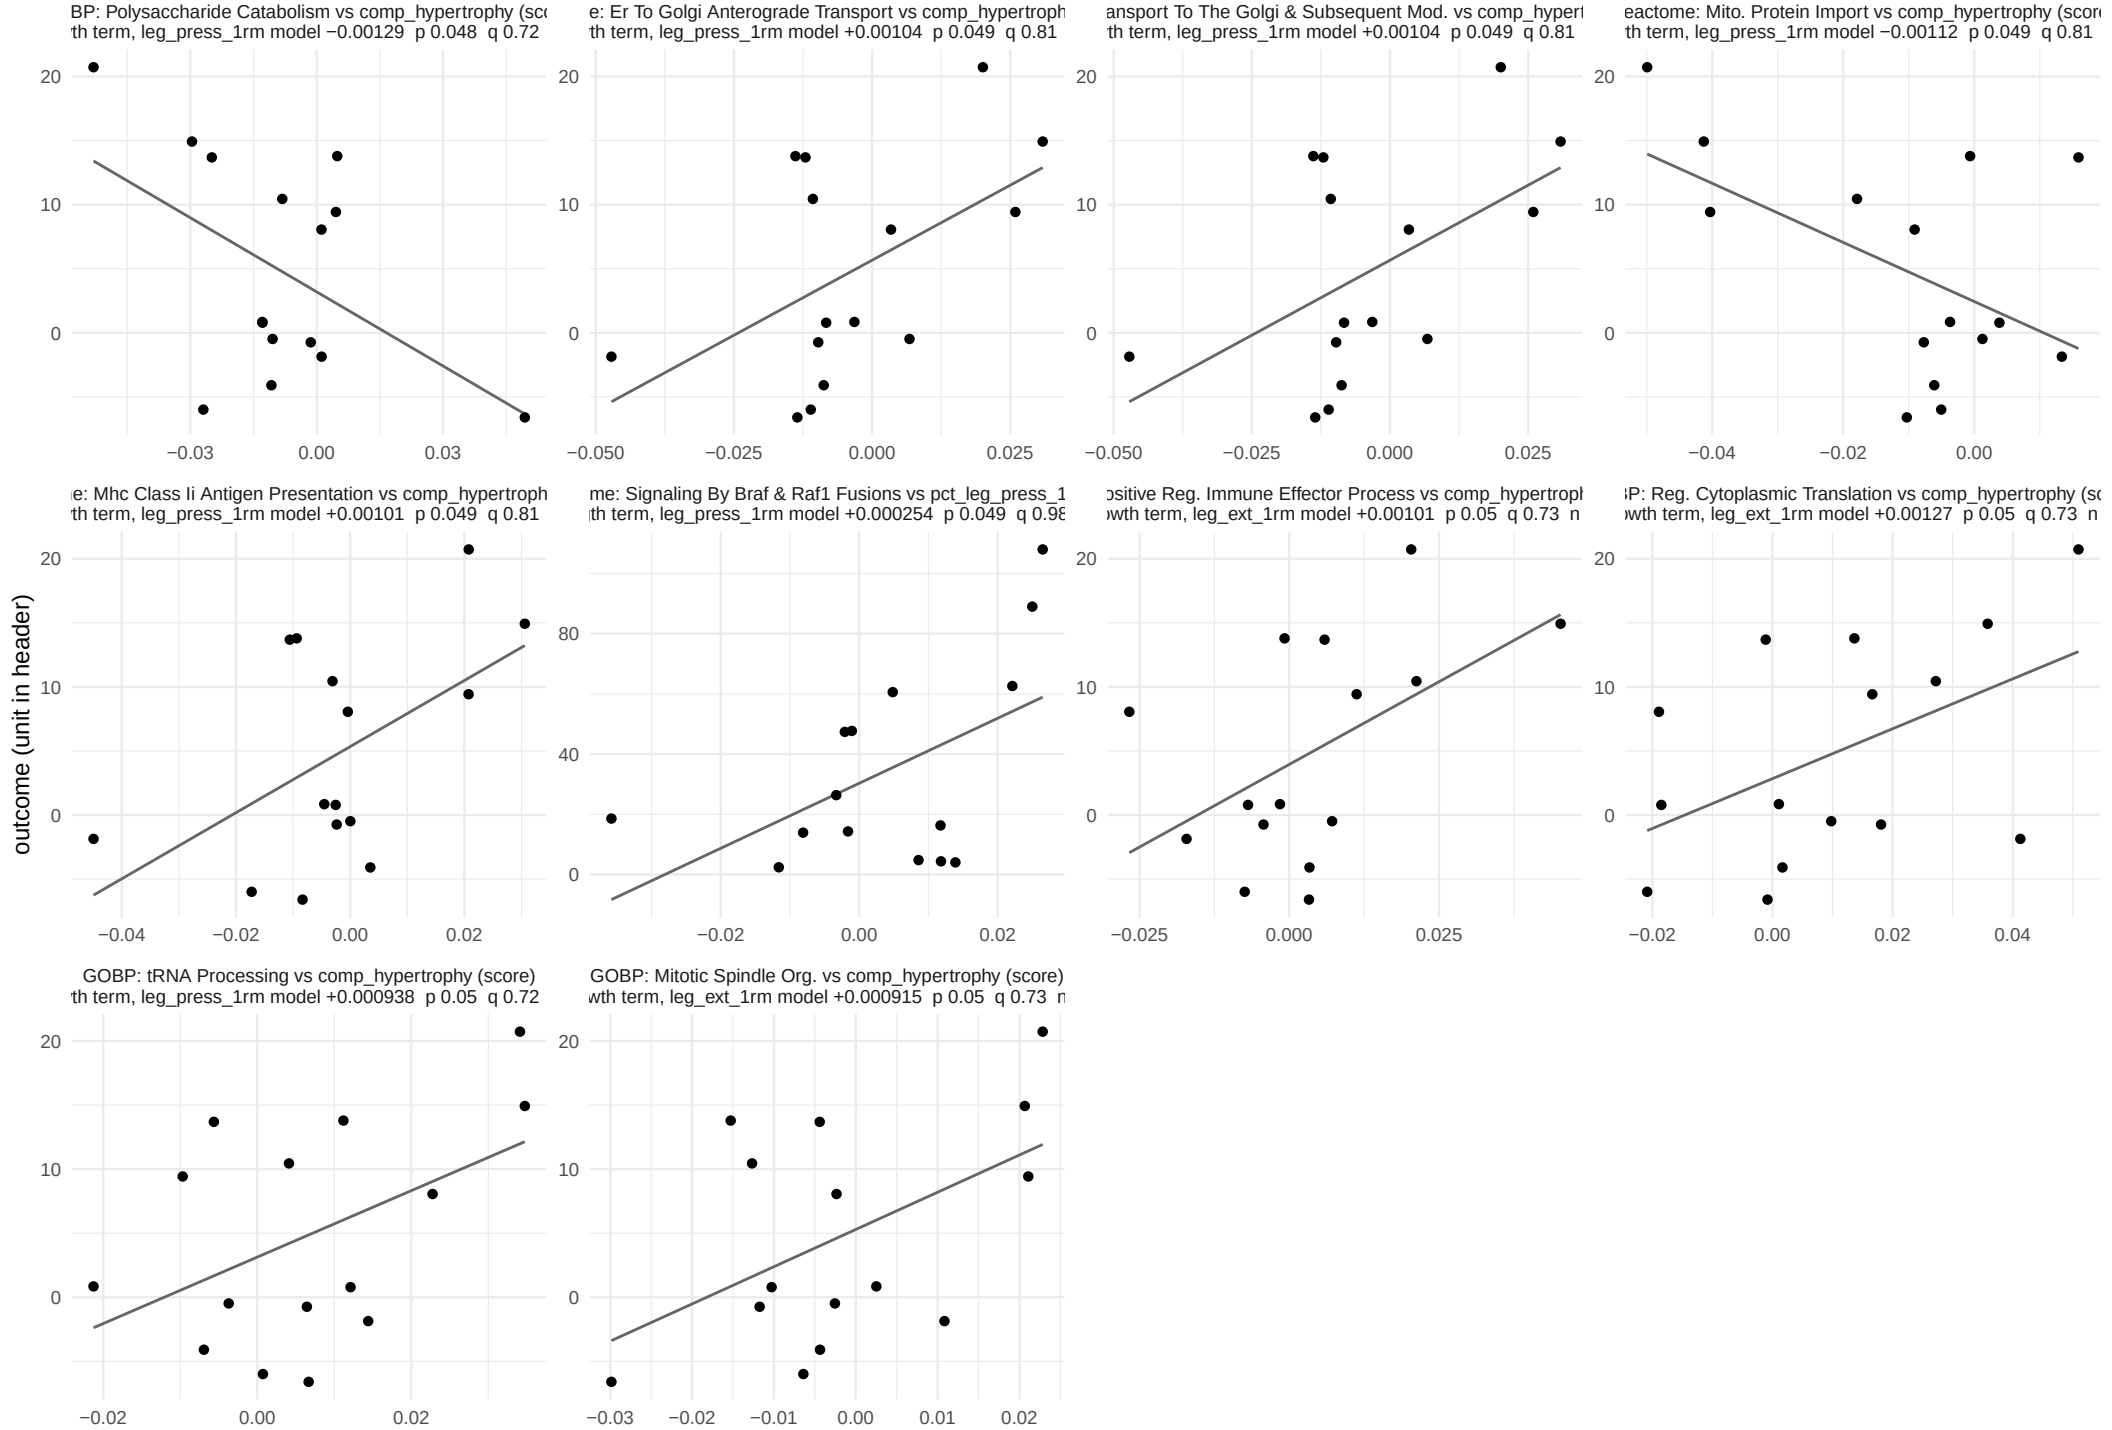

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Table: c_data/02_sets.xlsx, two_predictor.