

Sample model overview: proteins

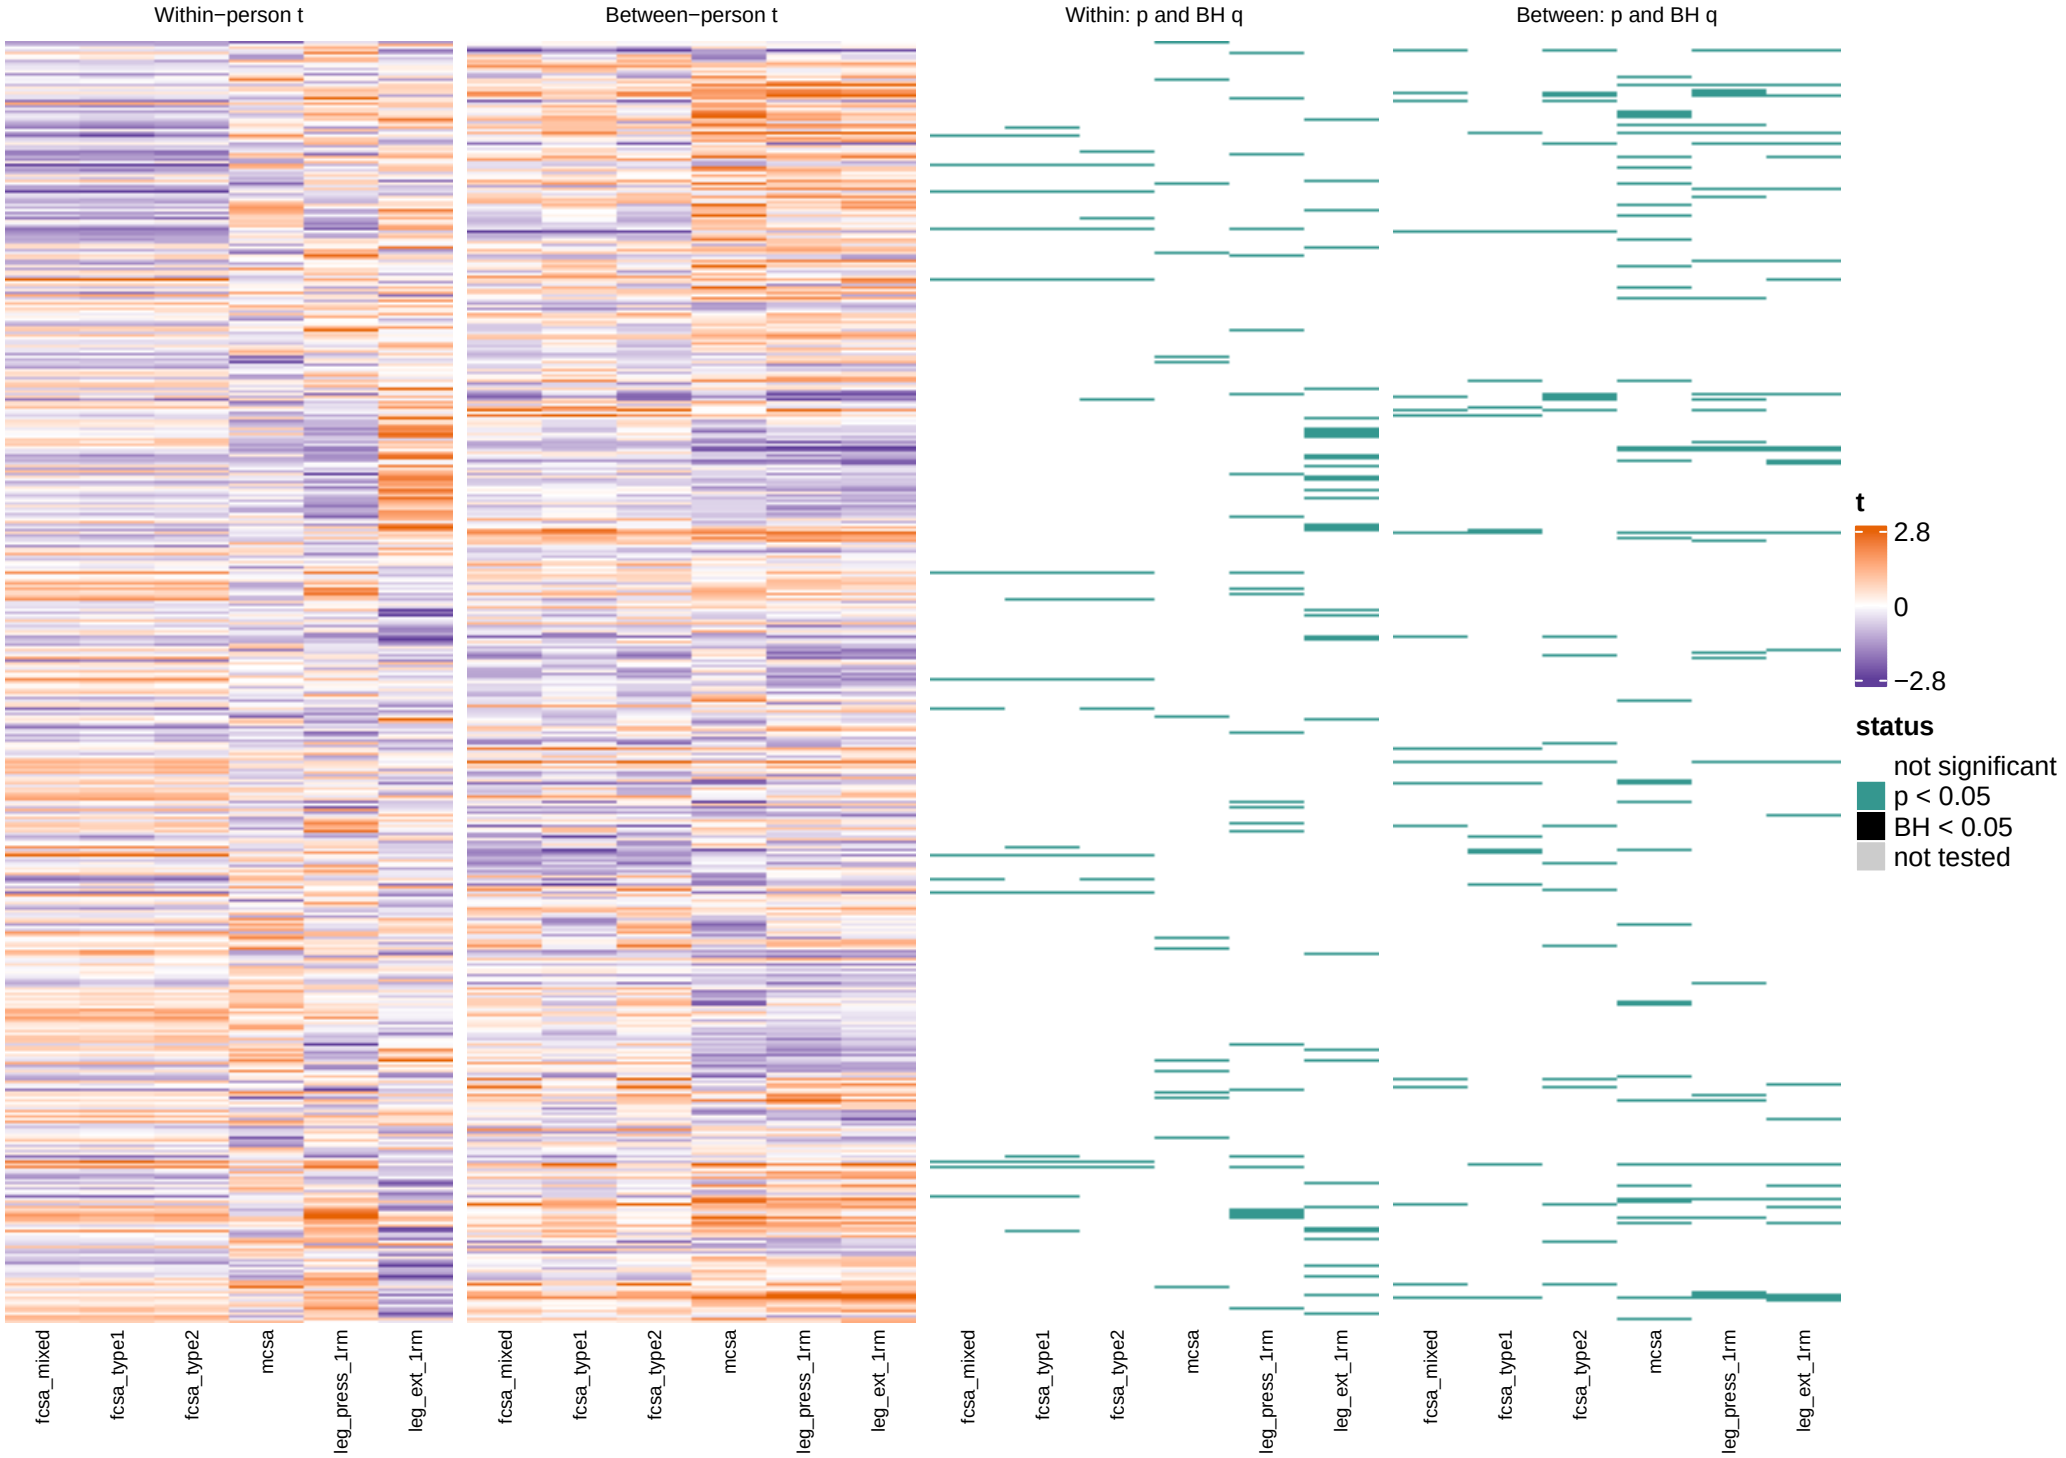


All 1,900 proteins, one row each. Moderated t of the within and between terms, abundance ~ timepoint + between + within, subject blocked. Colours stop at the 99th percentile of |t|, 2.8.
Rows are ordered by average−linkage clustering (1 − Pearson r) of limpa's matrix, for display only. Grey: not tested. Table: c_data/04_associate.xlsx, model.

Change score overview, training window: proteins

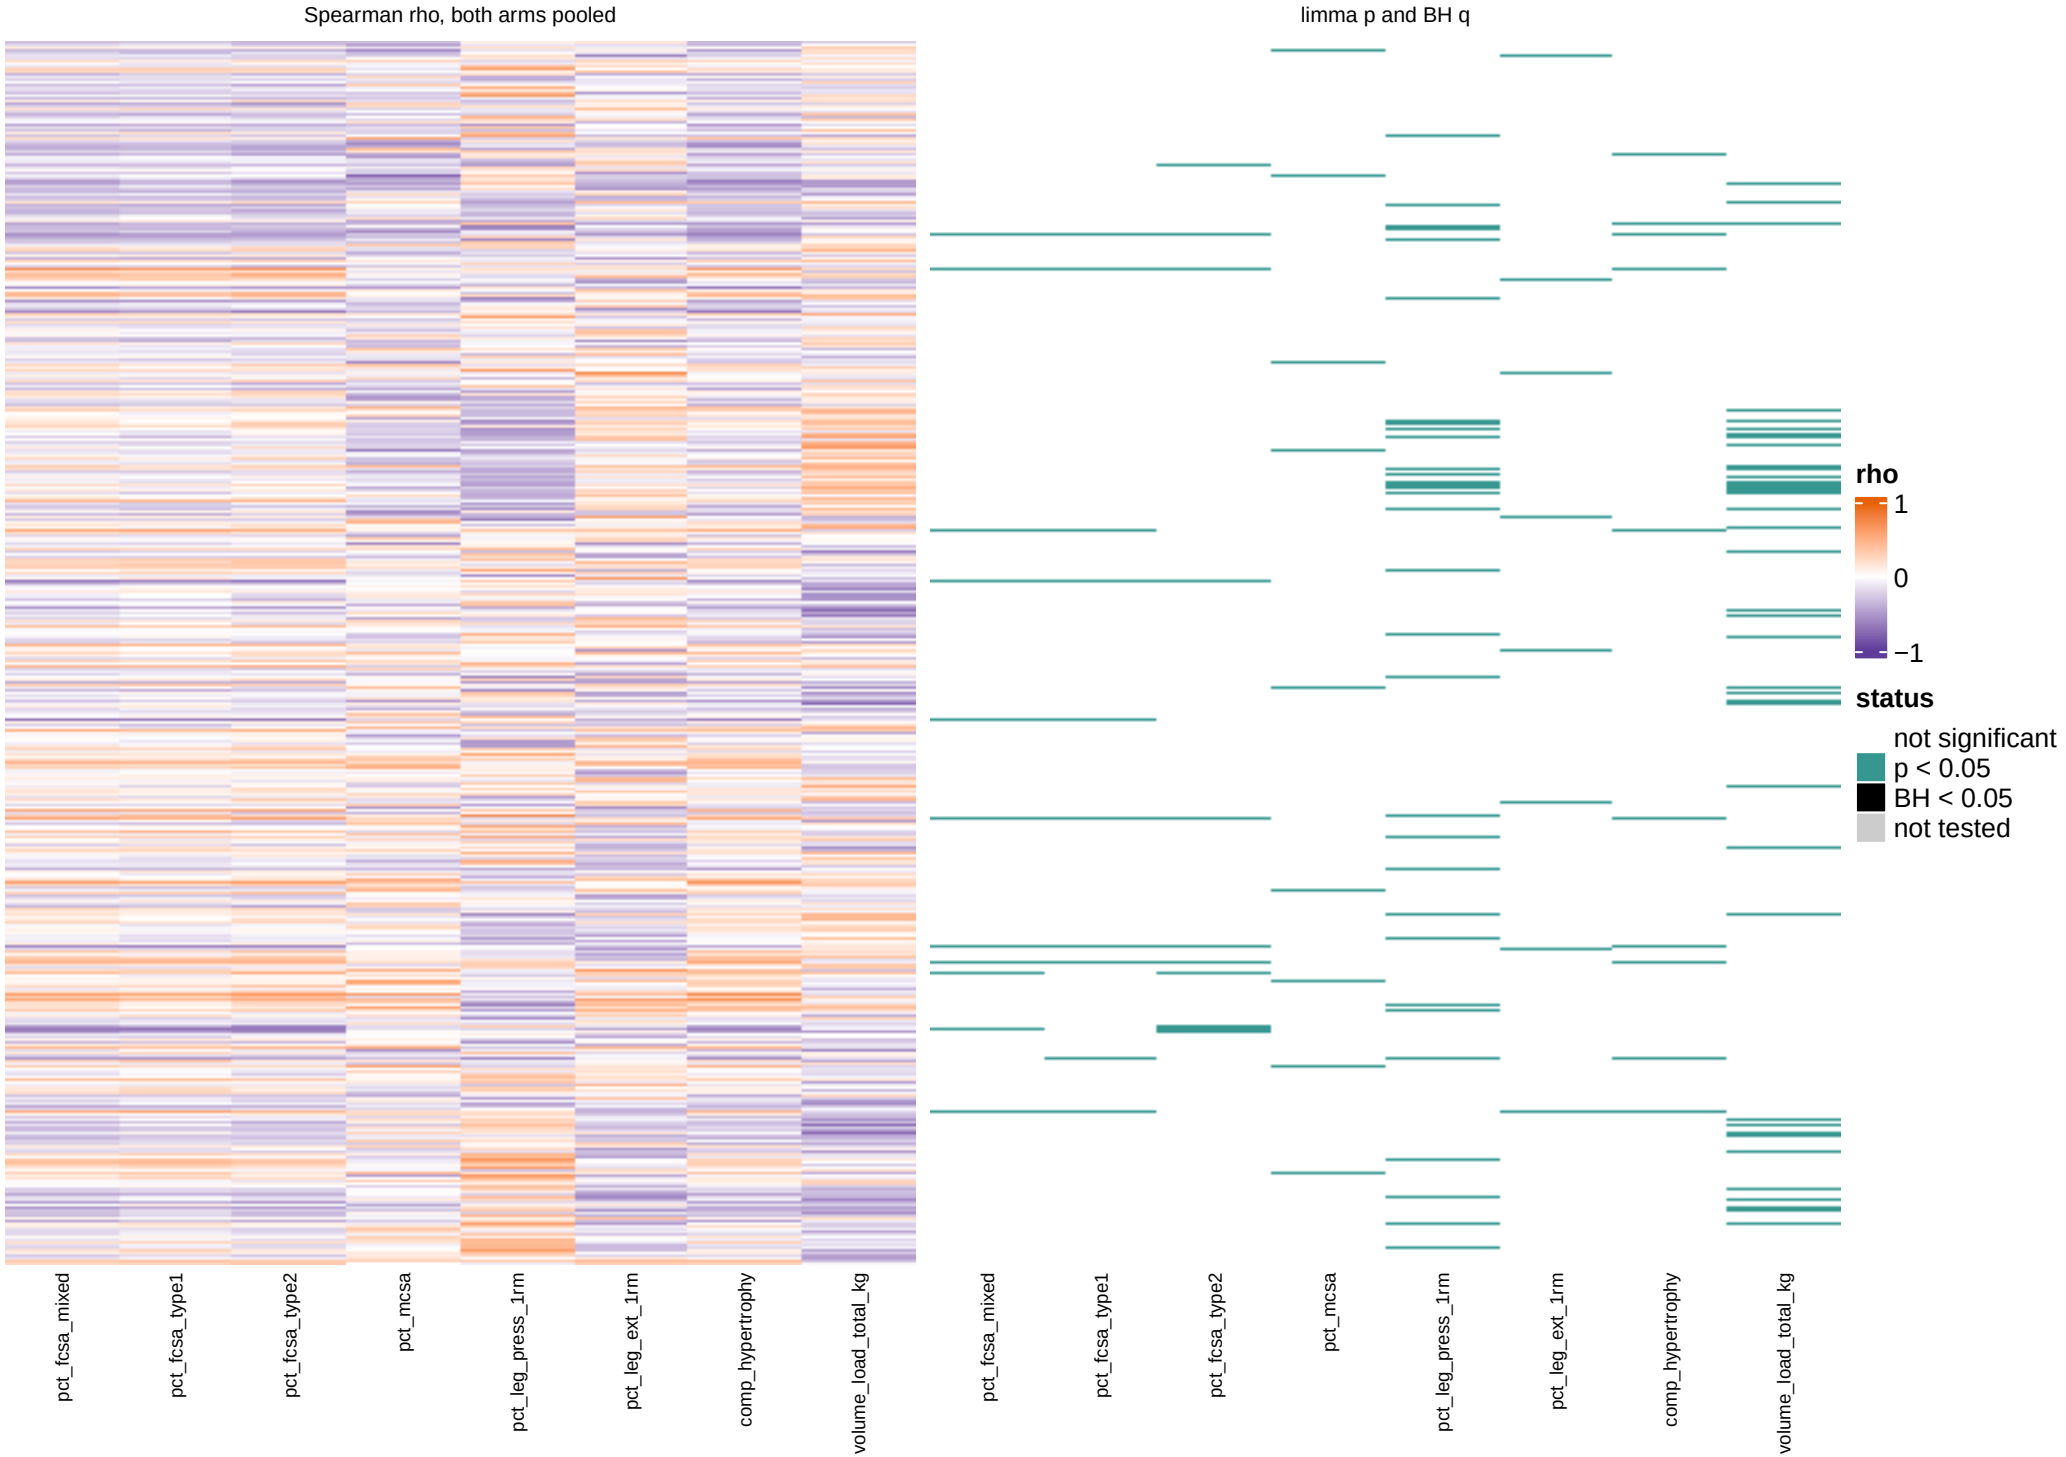


All 1,900 proteins, one row each. Spearman rho between the log2 abundance (change, T1 to T2) and each outcome; status from limma. Rows are ordered by average−linkage clustering (1 − Pearson r) of limpa's matrix, for display only. Grey: not tested. Table: c_data/04_associate.xlsx, change_score.

Change score overview, baseline window: proteins

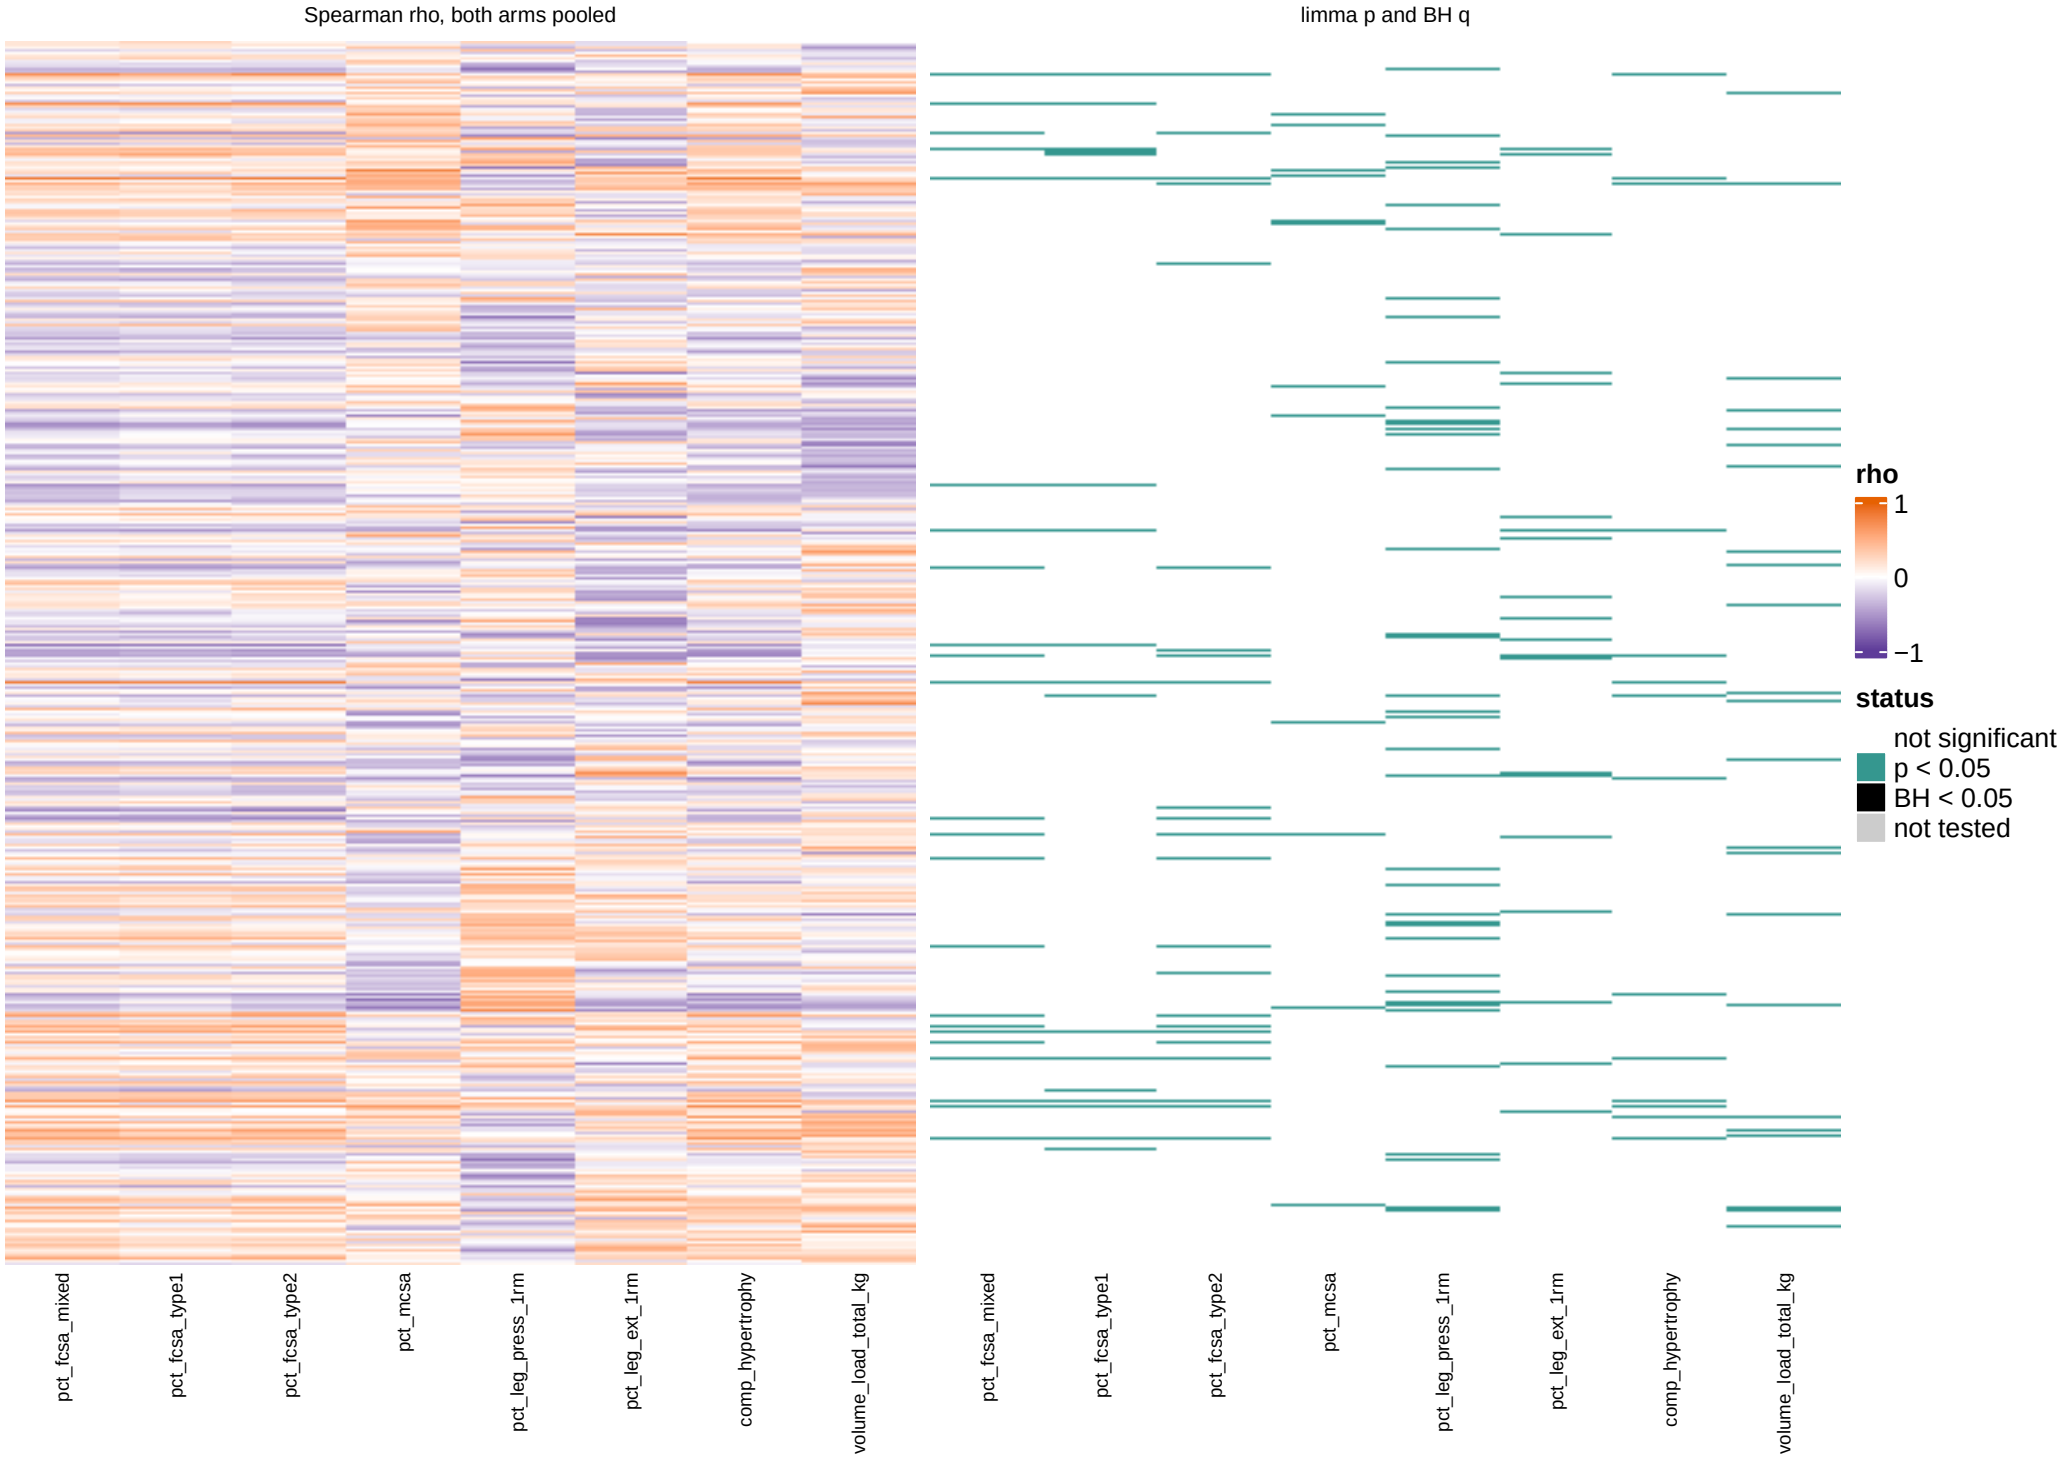


All 1,900 proteins, one row each. Spearman rho between the log2 abundance (T1 level) and each outcome; status from limma. Rows are ordered by average−linkage clustering (1 − Pearson r) of limpa's matrix, for display only. Grey: not tested. Table: c_data/04_associate.xlsx, change_score.

Change score overview, acute window: proteins

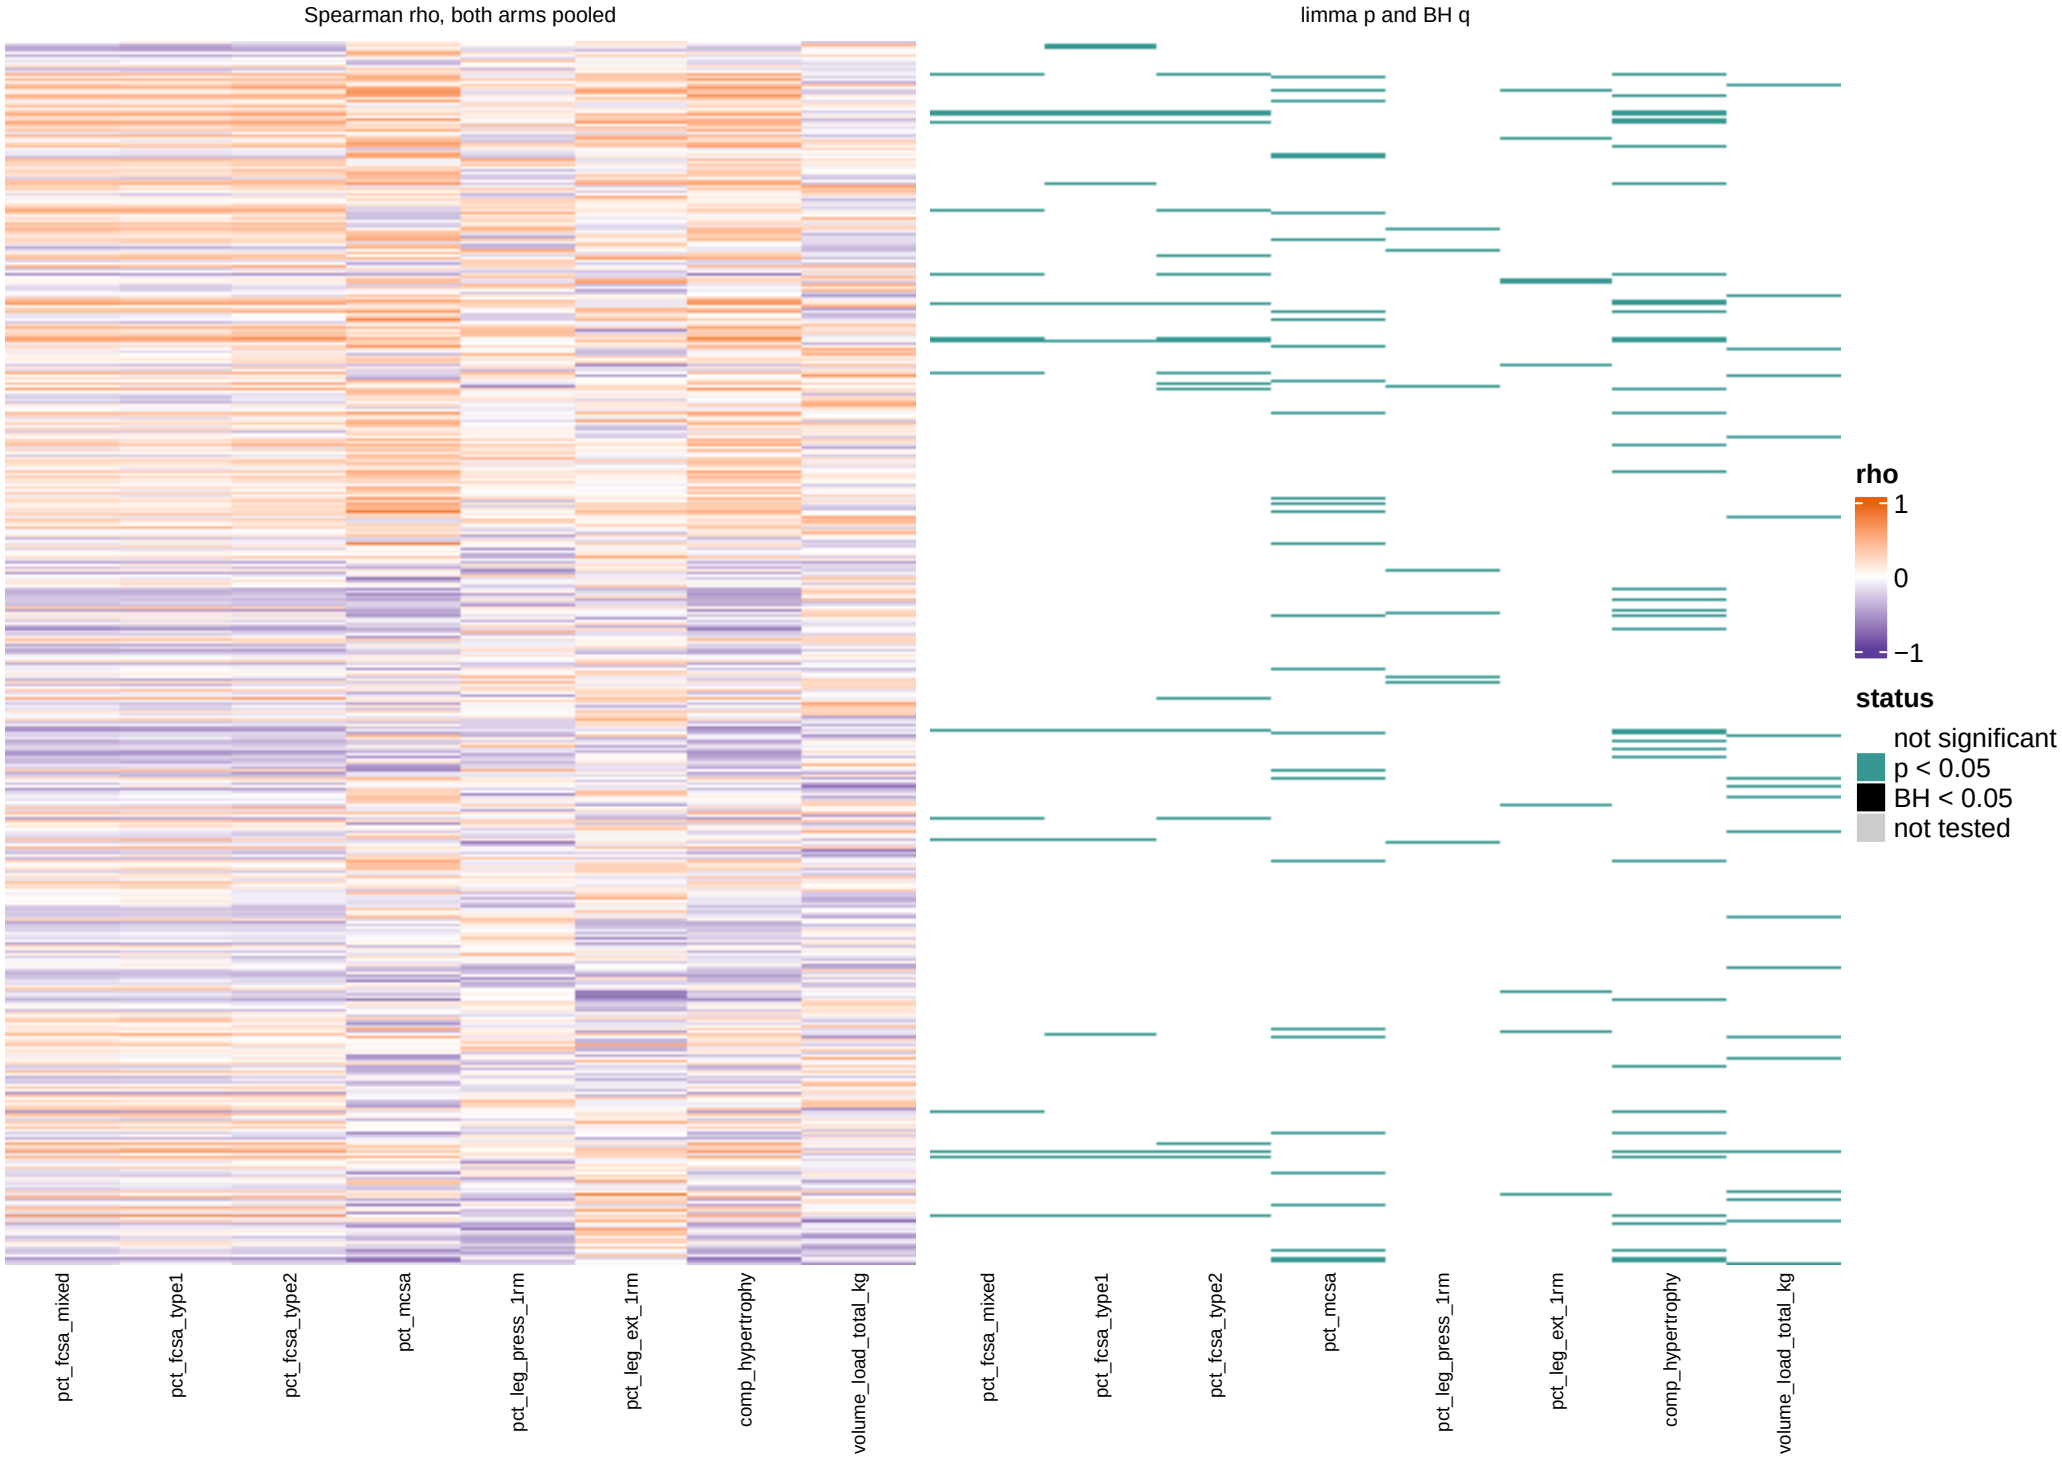


All 1,900 proteins, one row each. Spearman rho between the log2 abundance (change, T2 to T3) and each outcome; status from limma. Rows are ordered by average−linkage clustering (1 − Pearson r) of limpa's matrix, for display only. Grey: not tested. Table: c_data/04_associate.xlsx, change_score.

Change score overview, baseline_level window: proteins

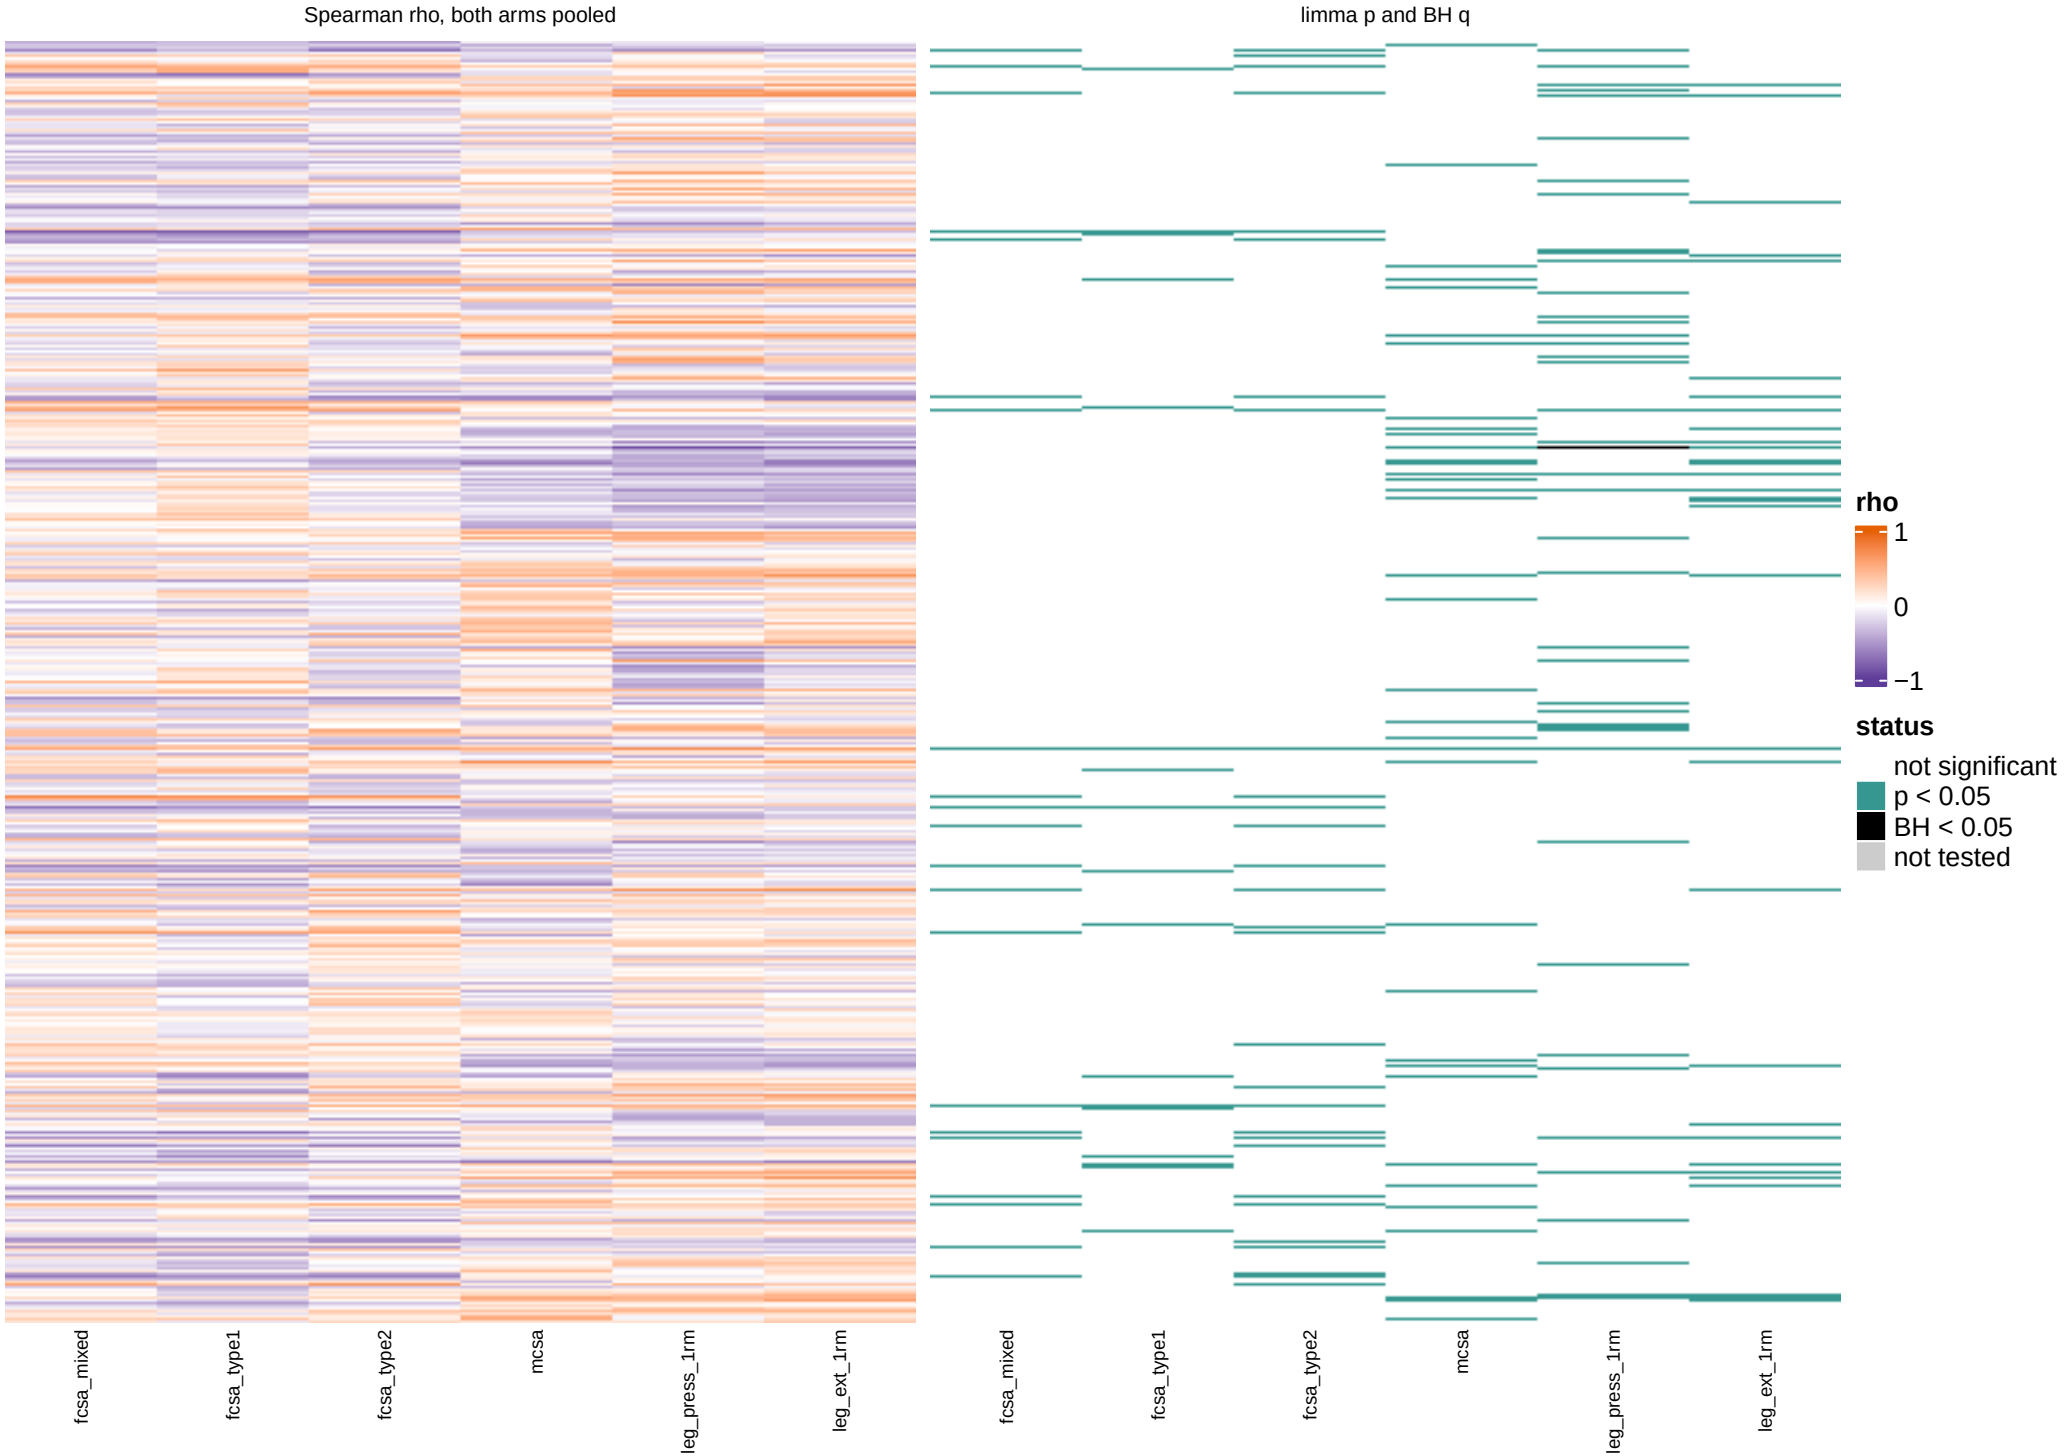

All 1,900 proteins, one row each. Spearman rho between the log2 abundance (T1 level) and each outcome; status from limma. Rows are ordered by average−linkage clustering (1 − Pearson r) of limpa's matrix, for display only. Grey: not tested. Table: c_data/04_associate.xlsx, change_score.


Change score overview, post_level window: proteins

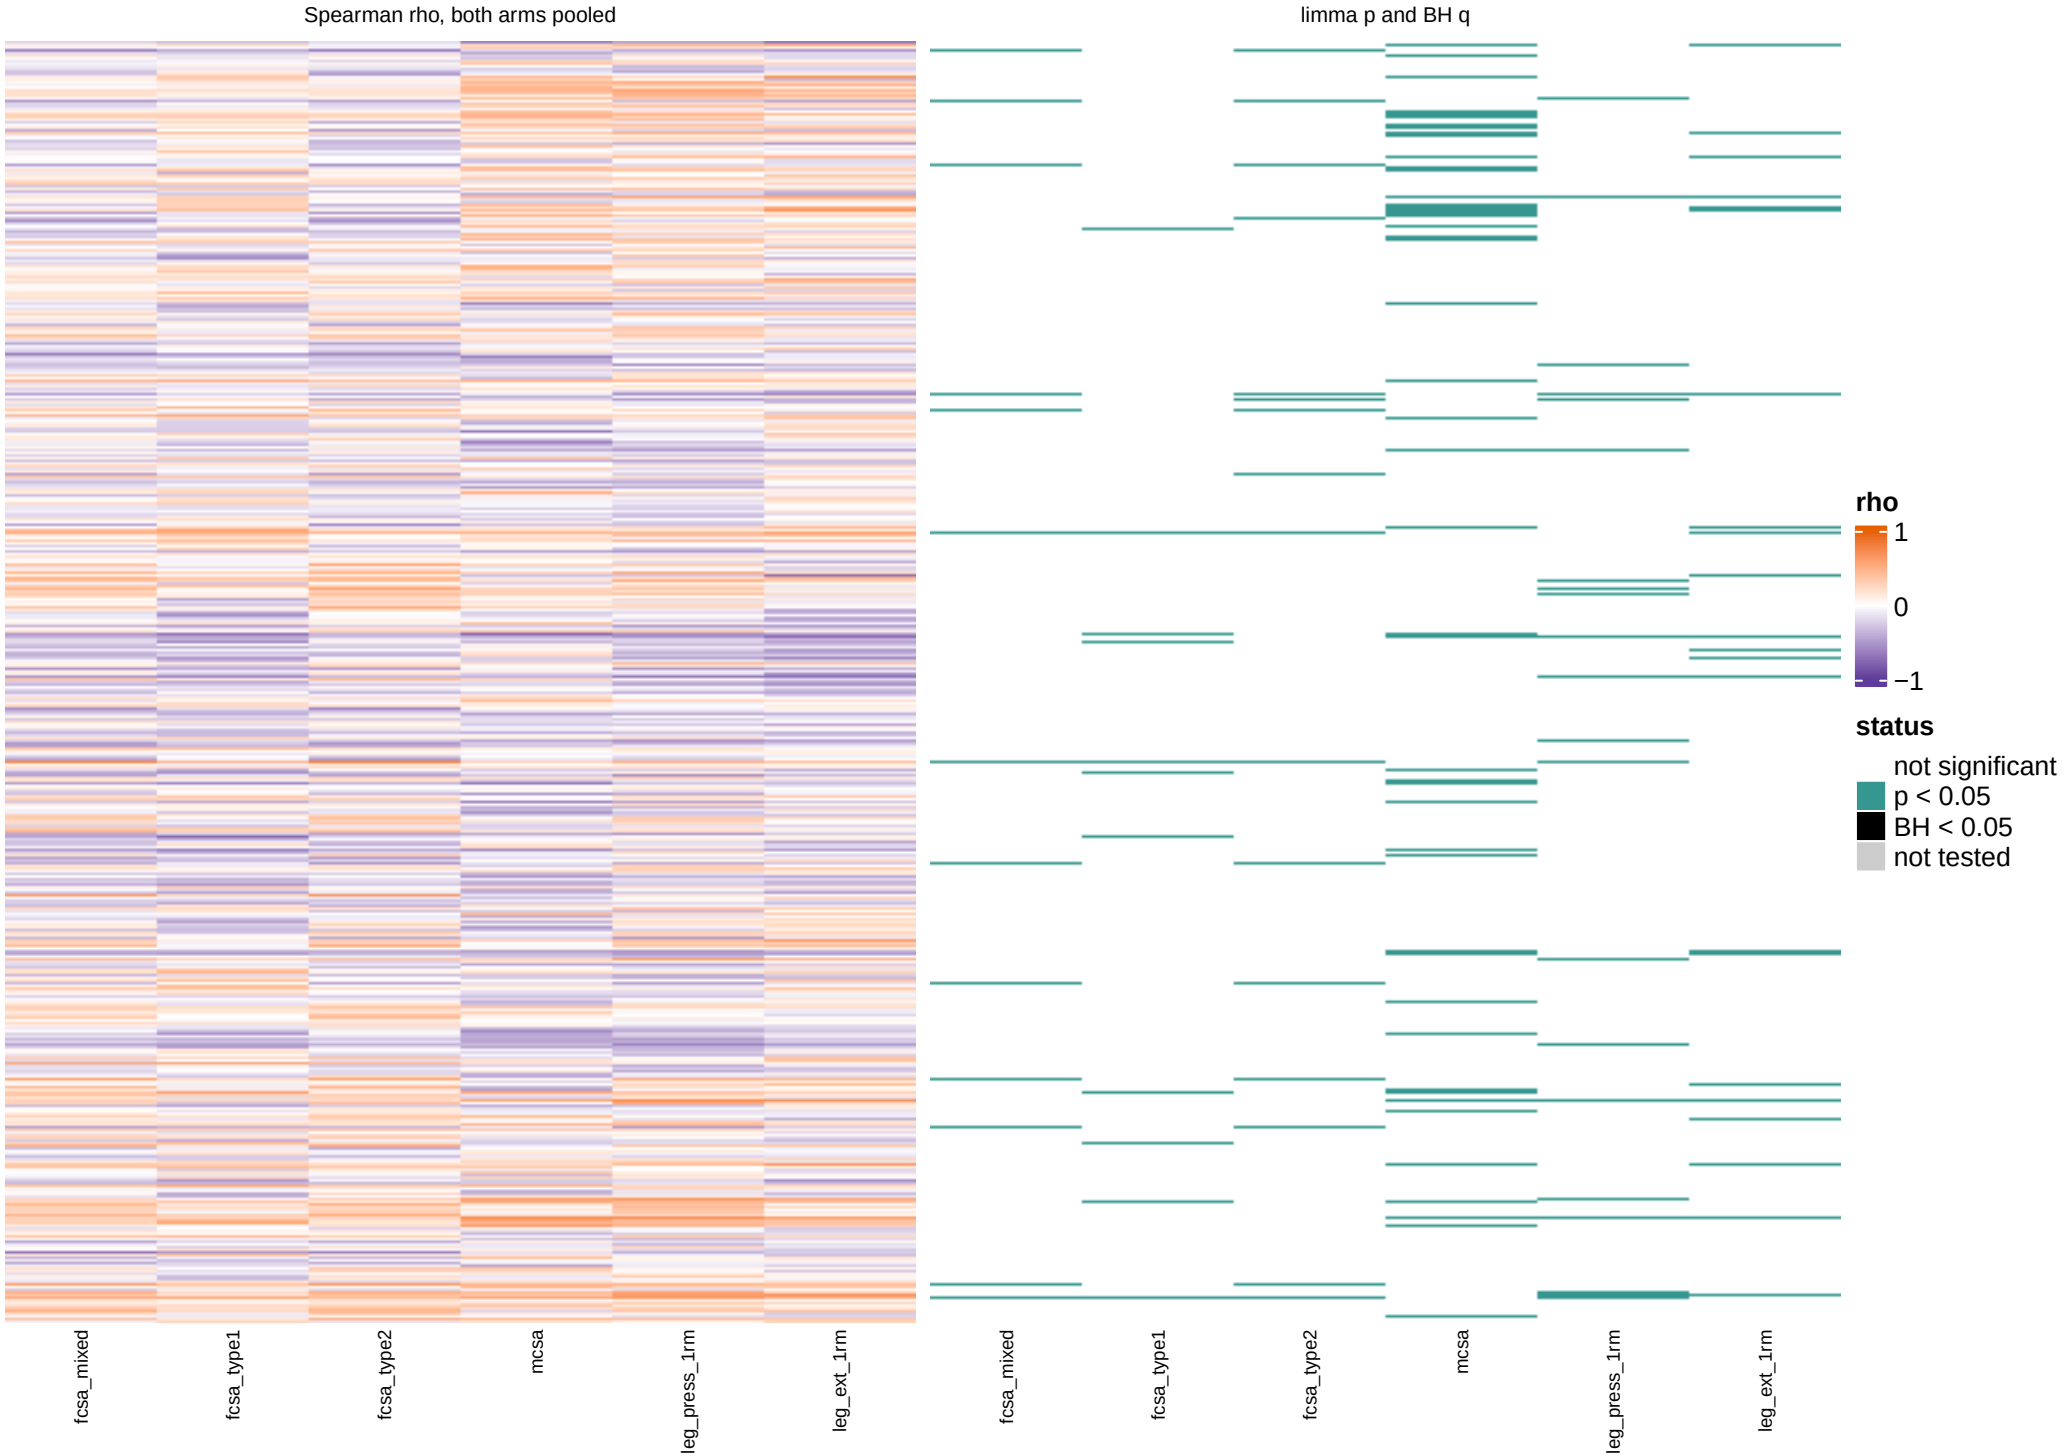

All 1,900 proteins, one row each. Spearman rho between the log2 abundance (T2 level) and each outcome; status from limma. Rows are ordered by average−linkage clustering (1 − Pearson r) of limpa's matrix, for display only. Grey: not tested. Table: c_data/04_associate.xlsx, change_score.

fcsa_mixed, within−person term


59 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 1 of 5.

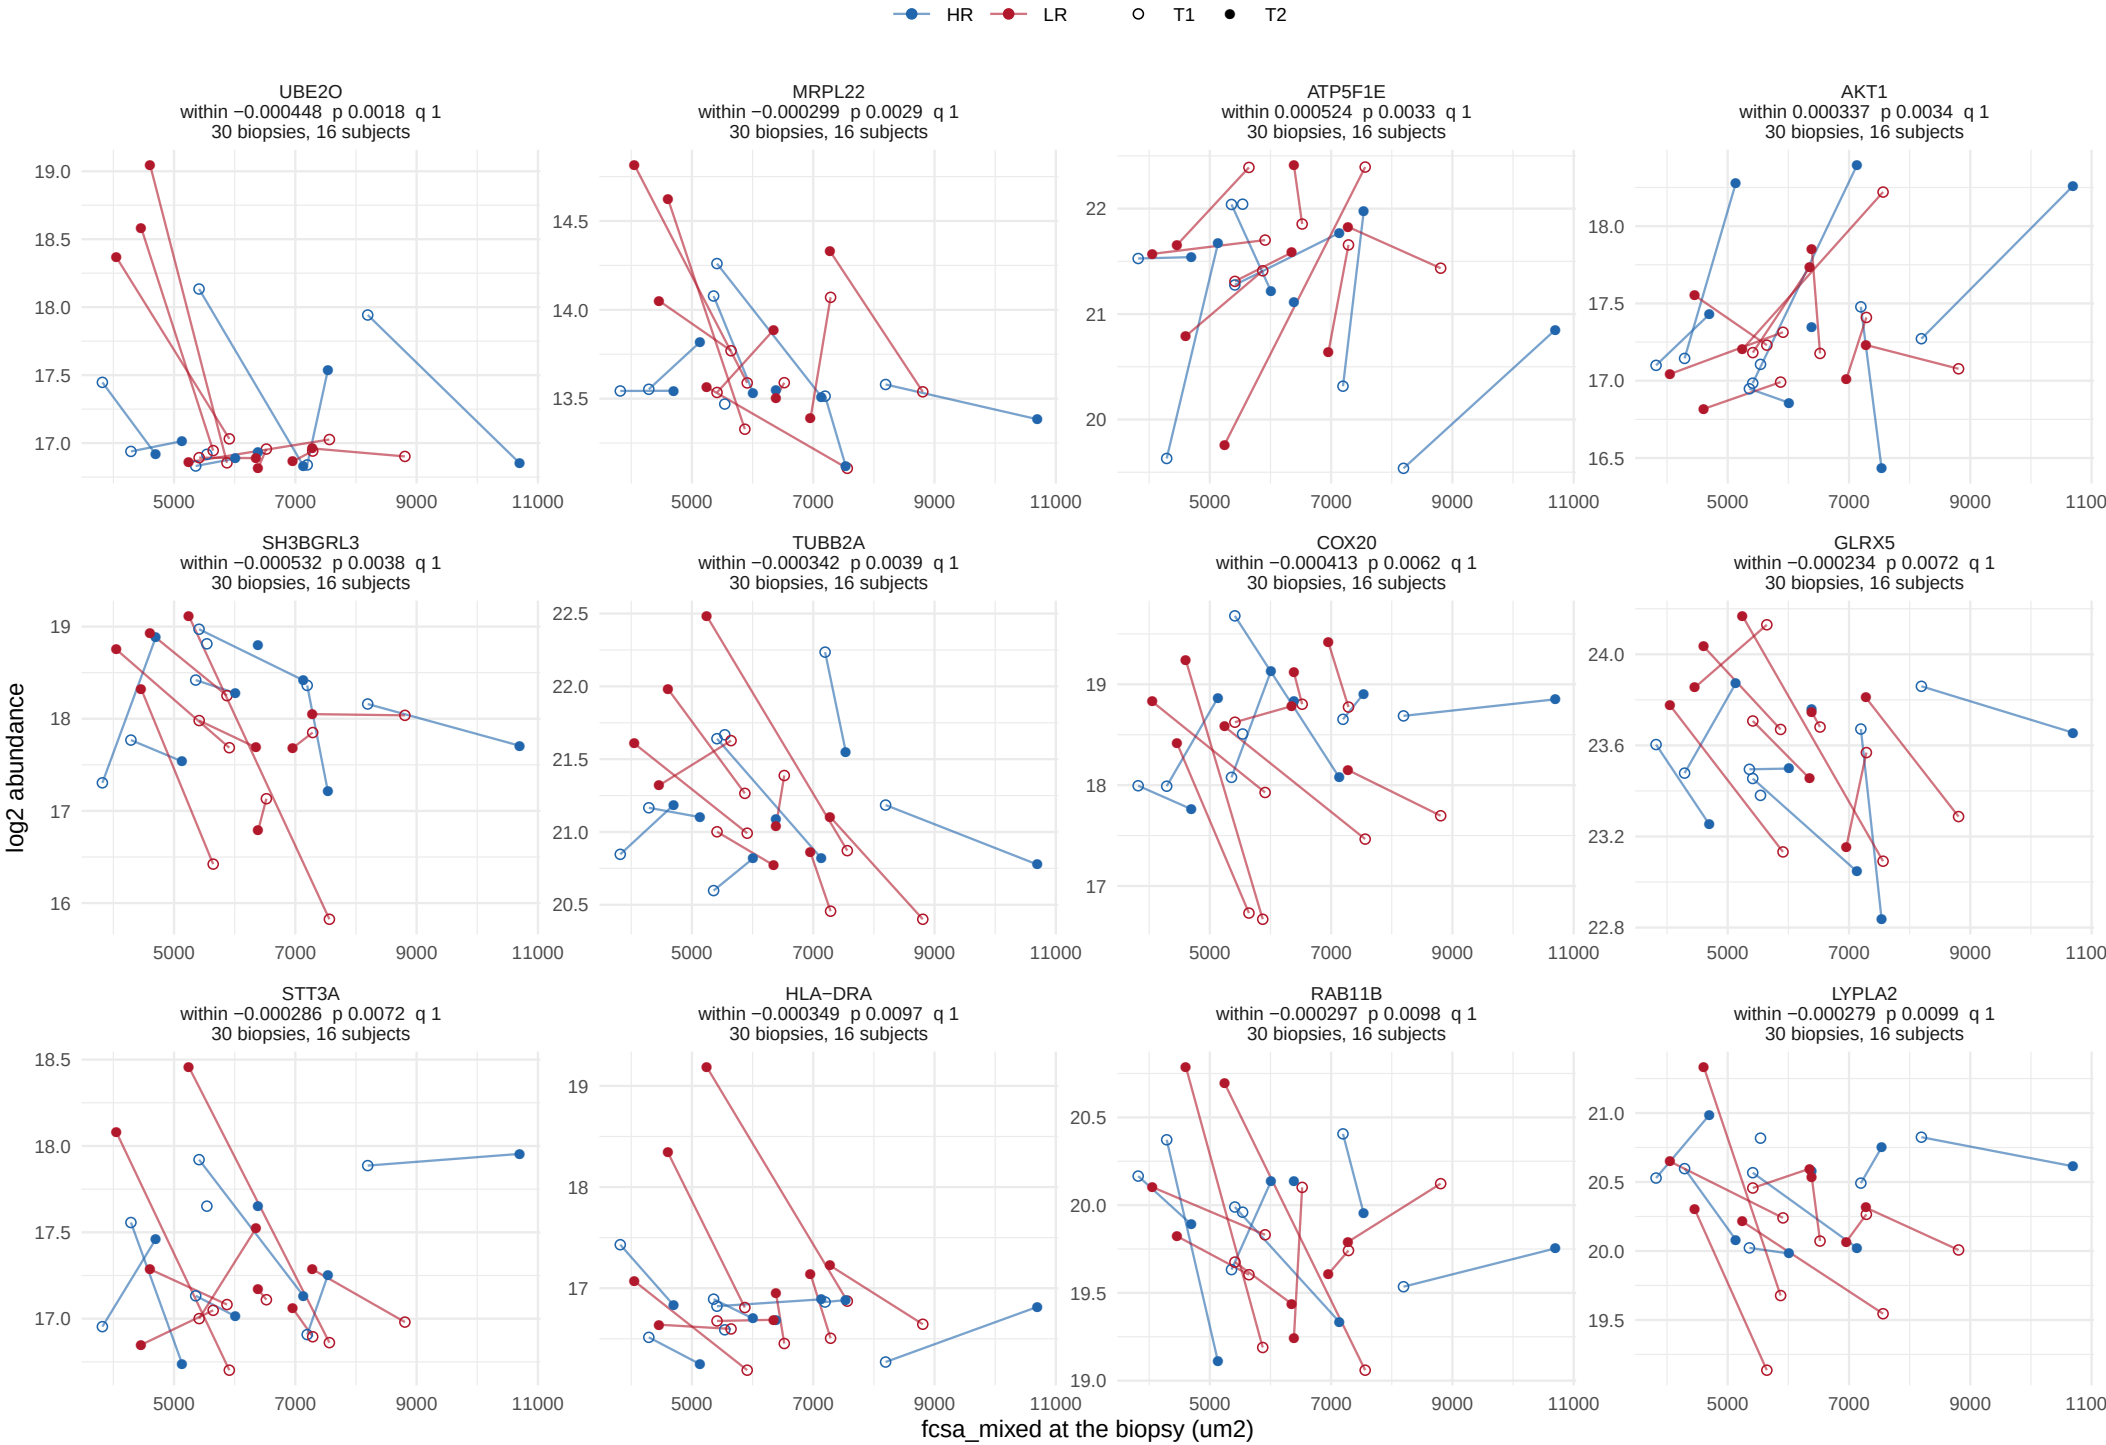

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_mixed, within−person term


59 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 2 of 5.

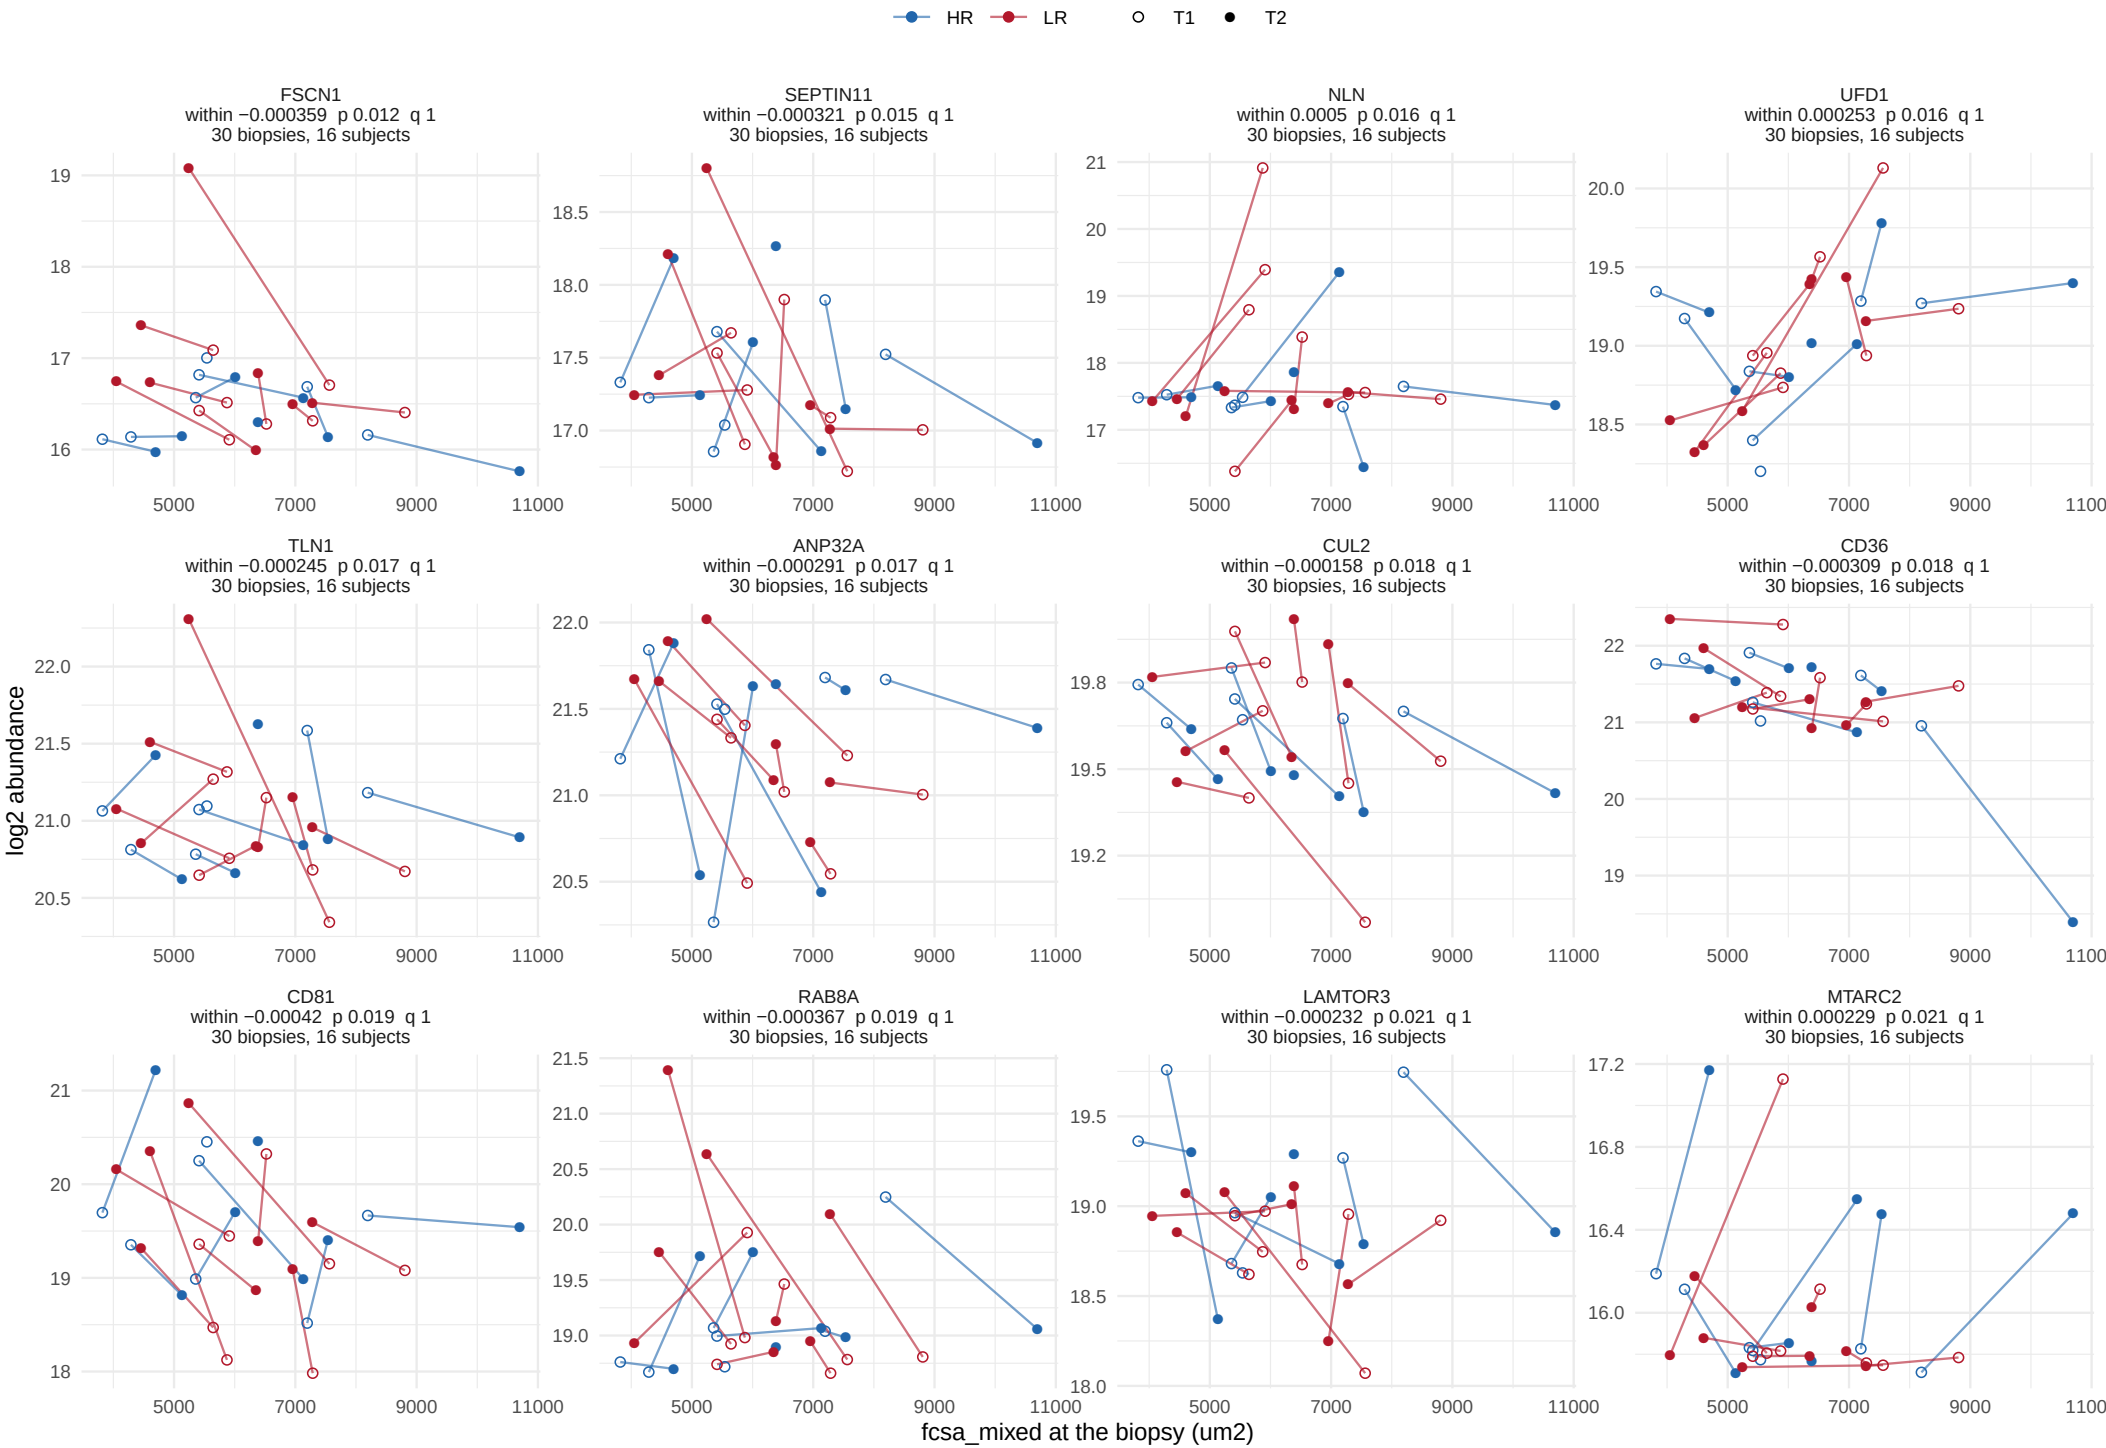

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_mixed, within−person term


59 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 3 of 5.

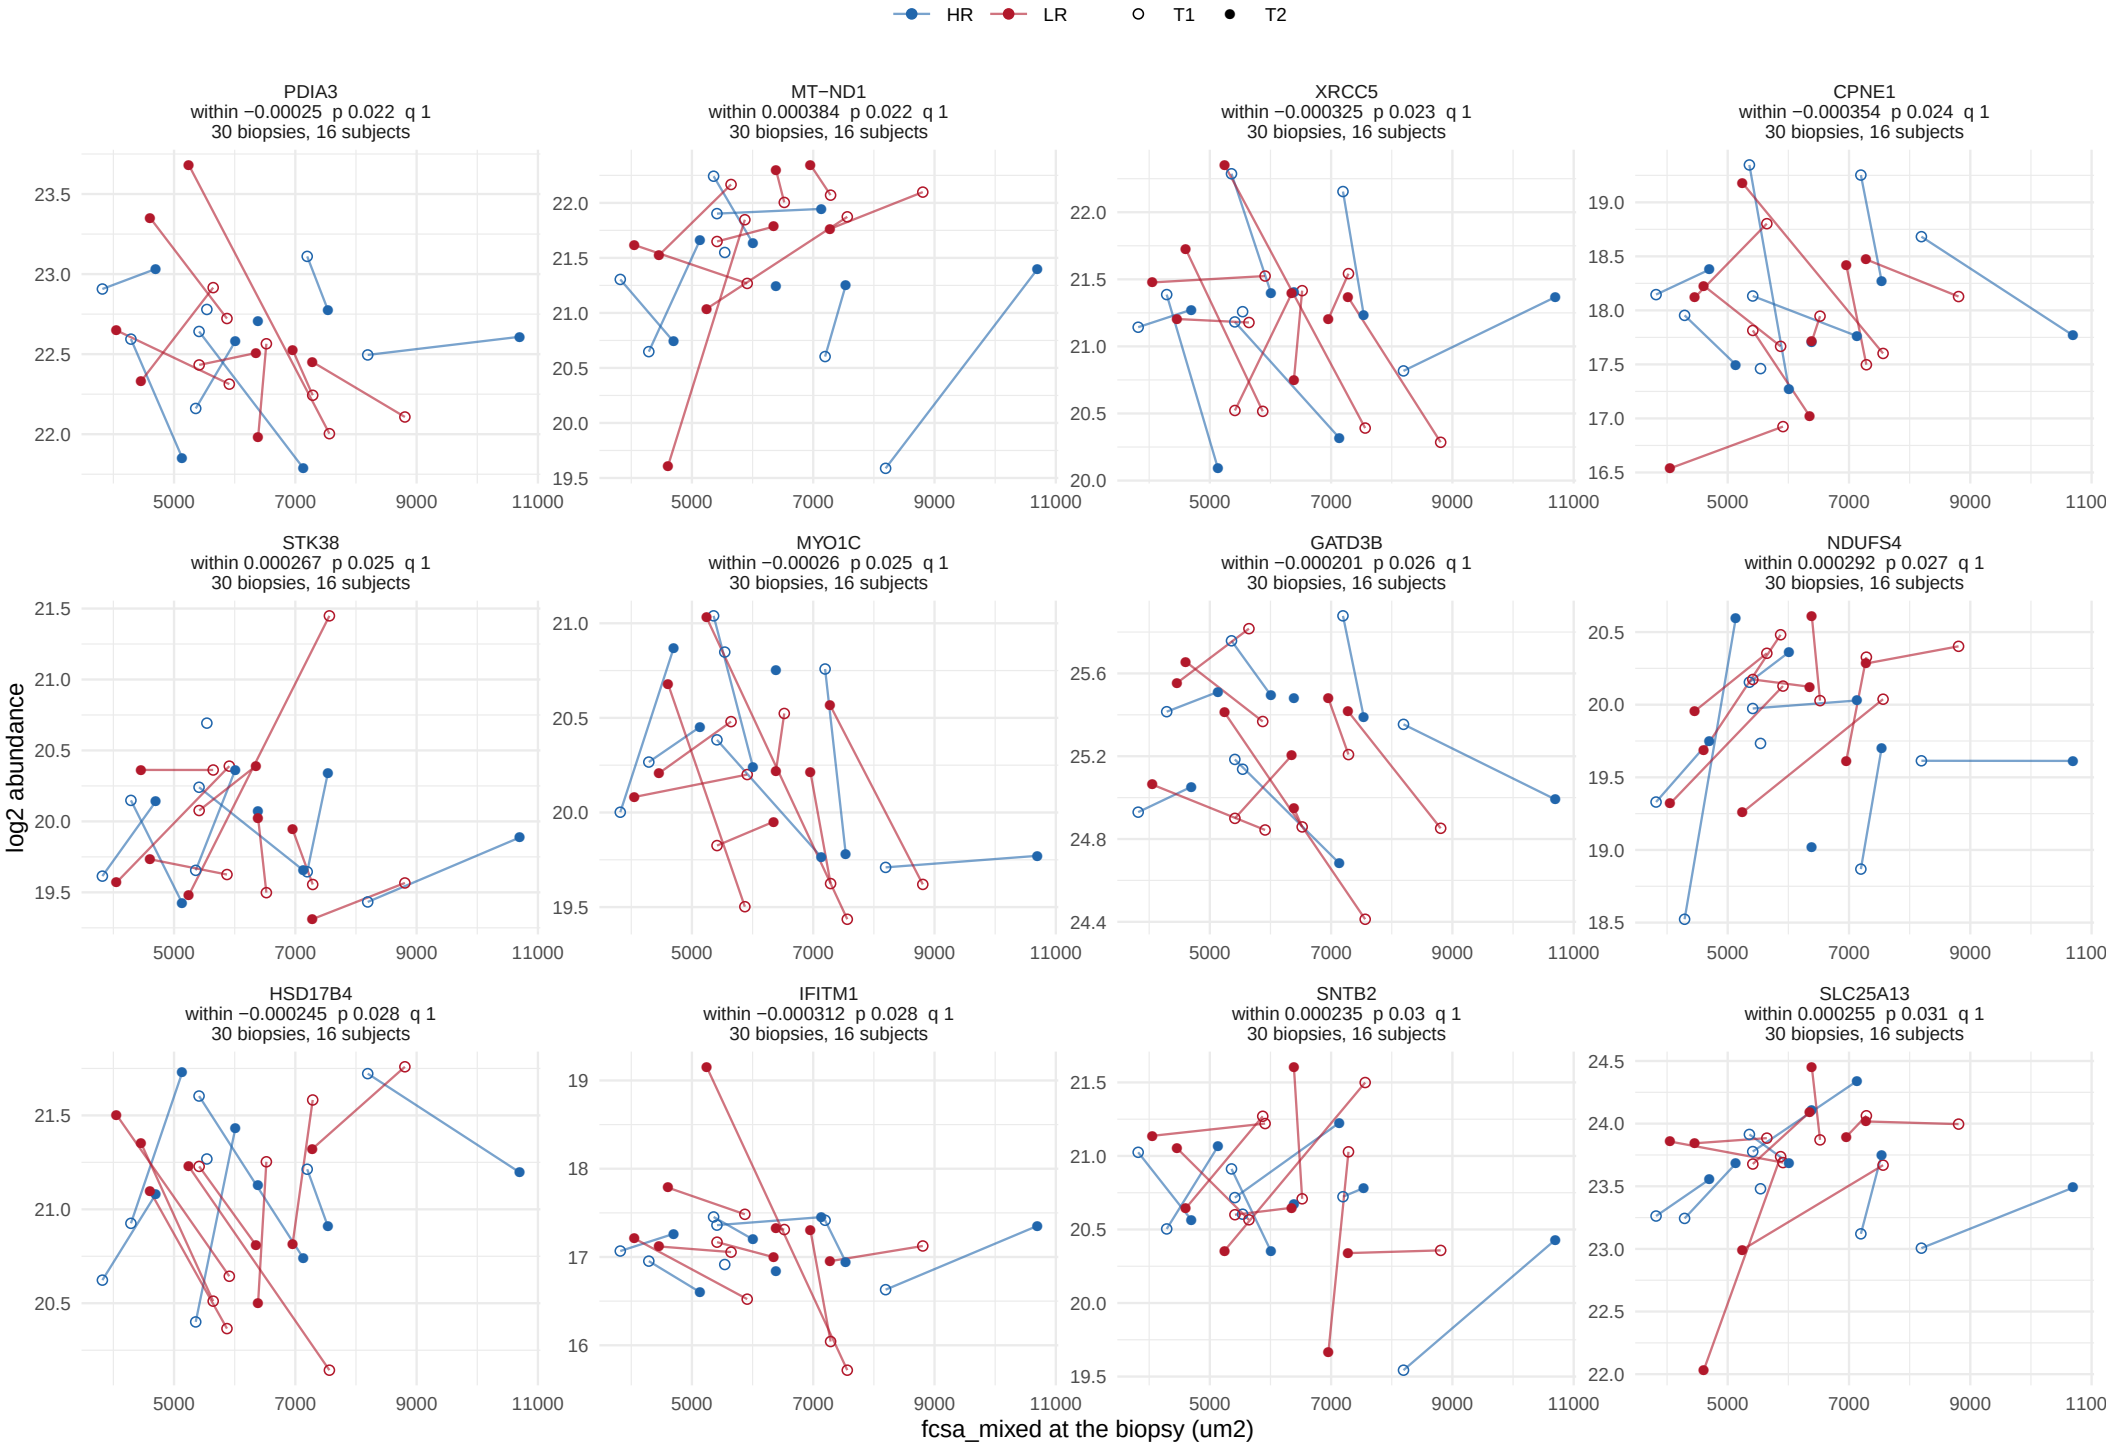

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_mixed, within−person term


59 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 4 of 5.

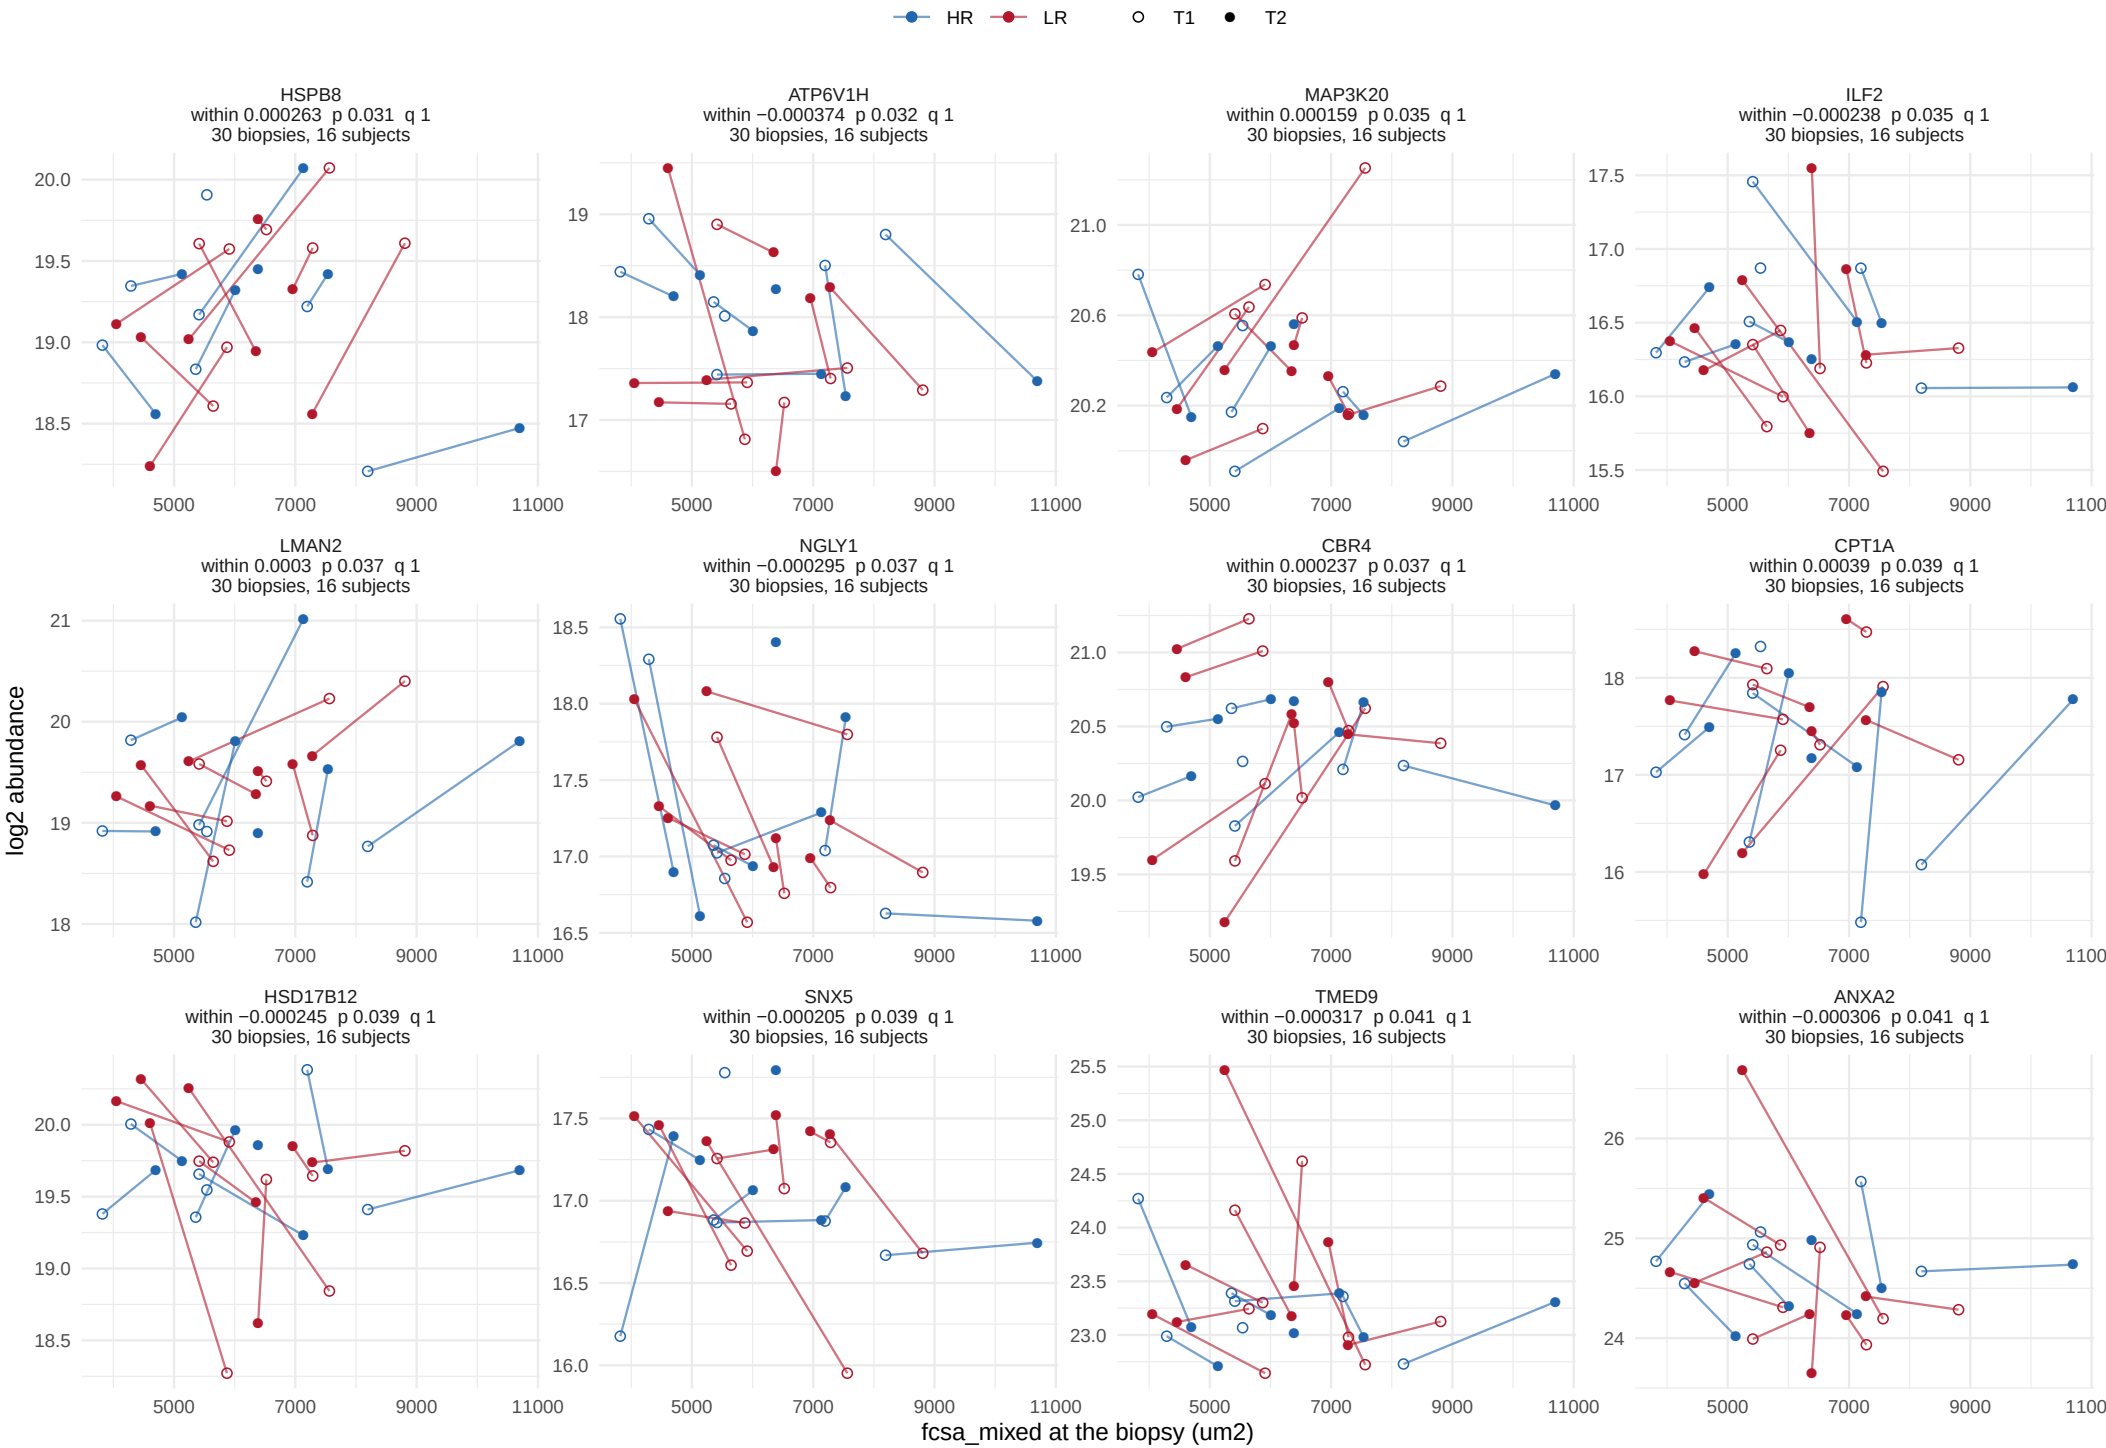

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_mixed, within−person term


59 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 5 of 5.

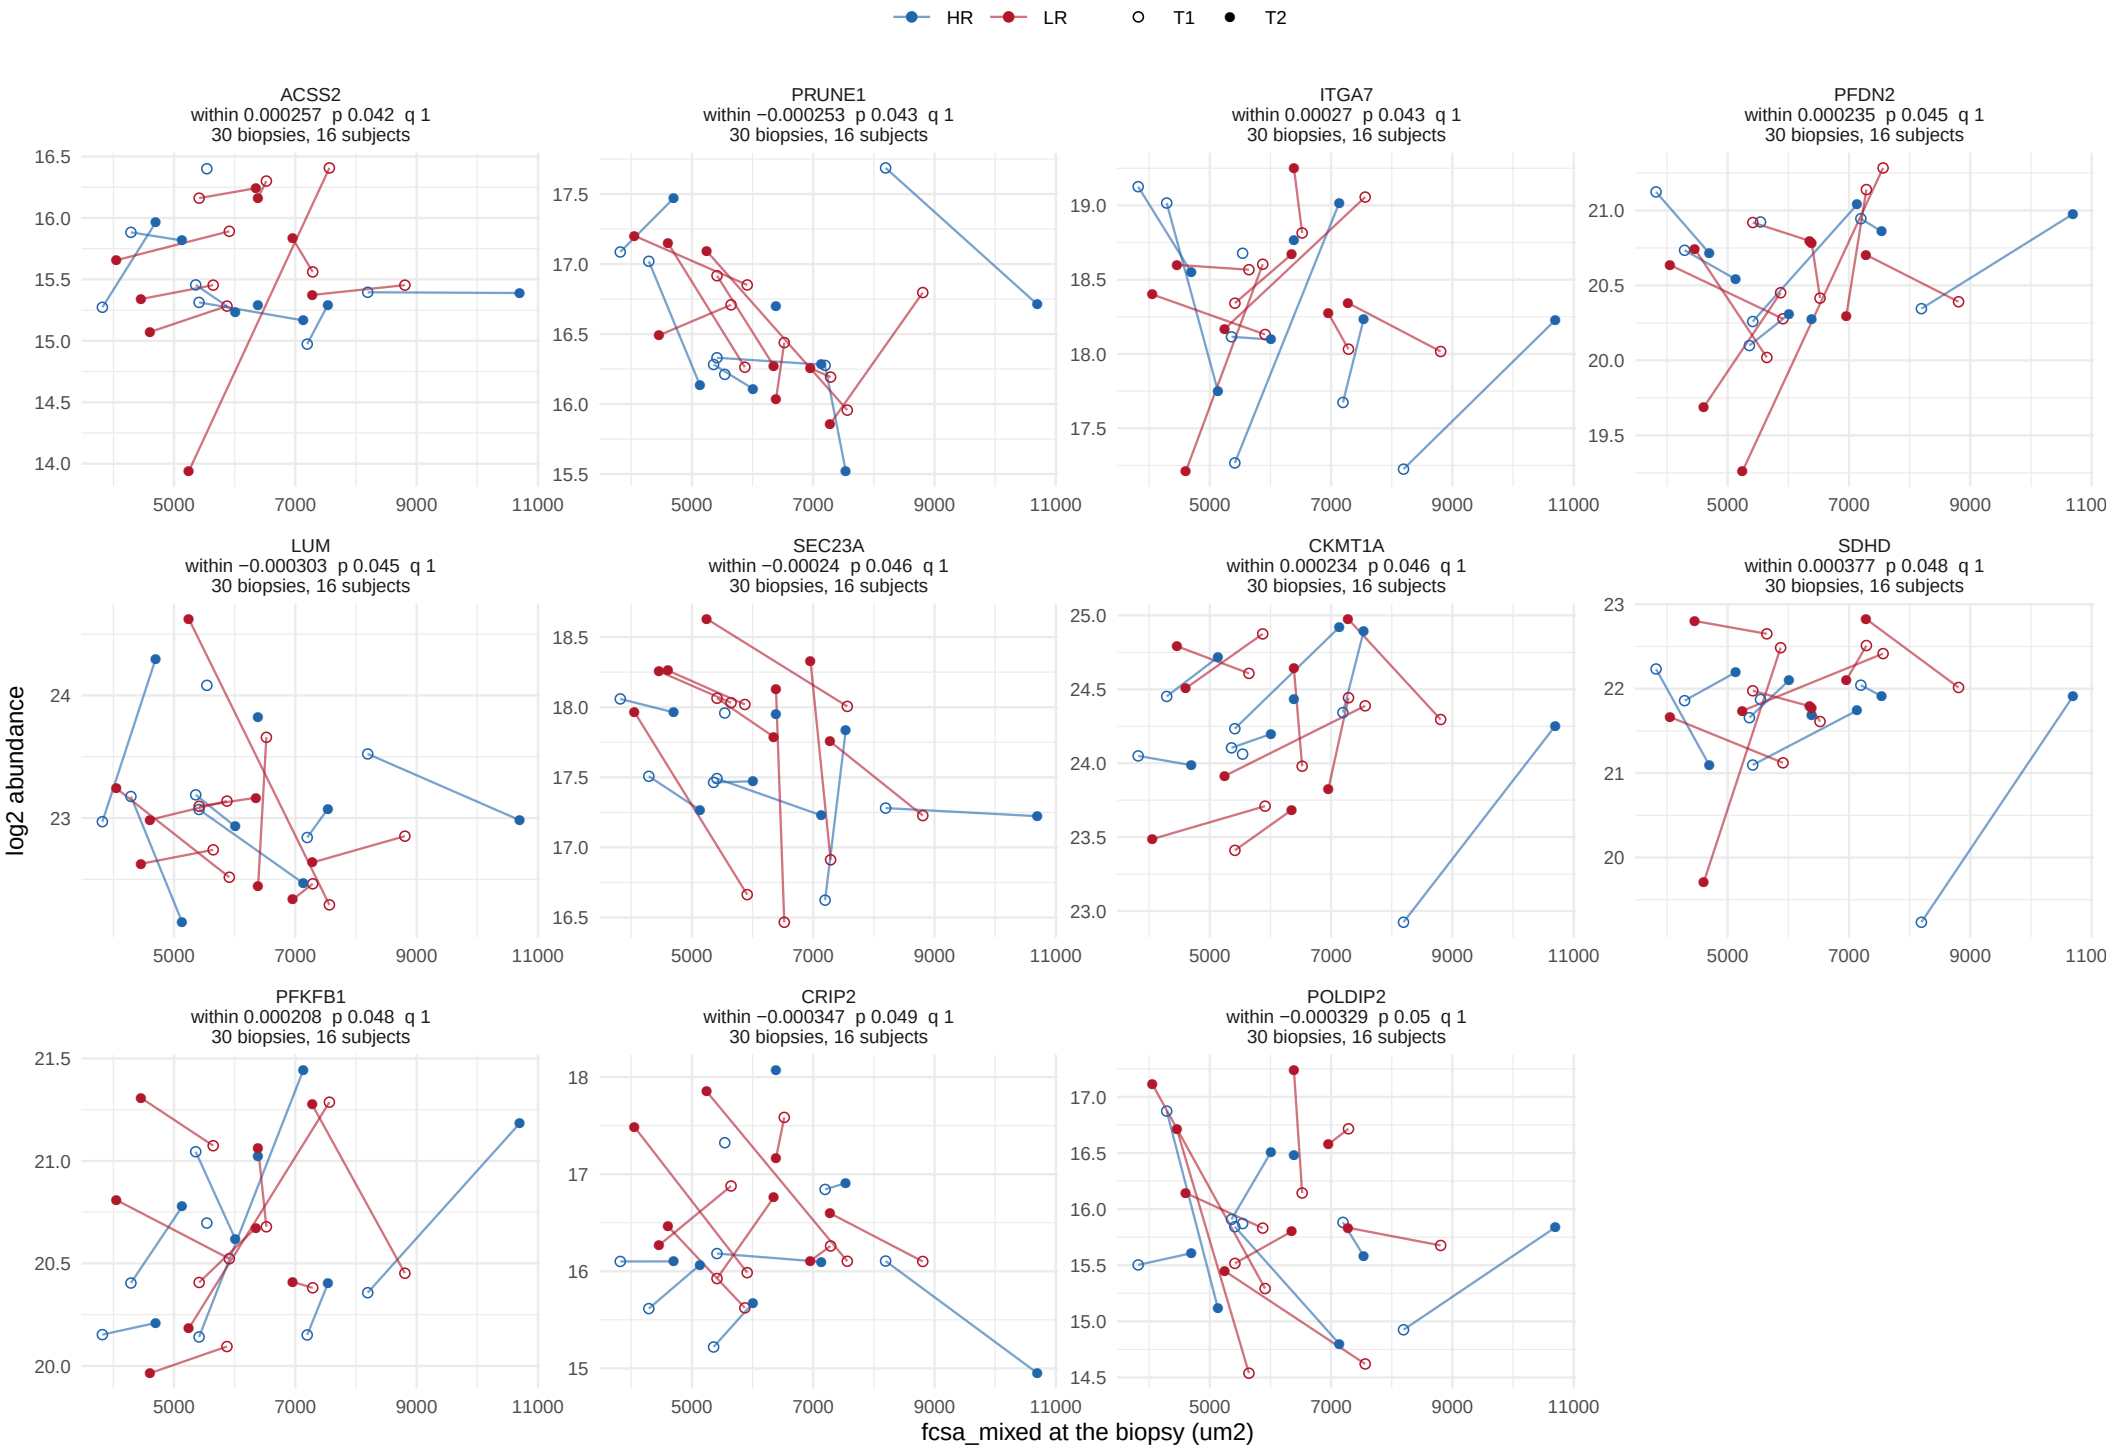

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_mixed, between−person term


76 of 1900 proteins at p < 0.05, 1 at BH < 0.05. Page 1 of 7.

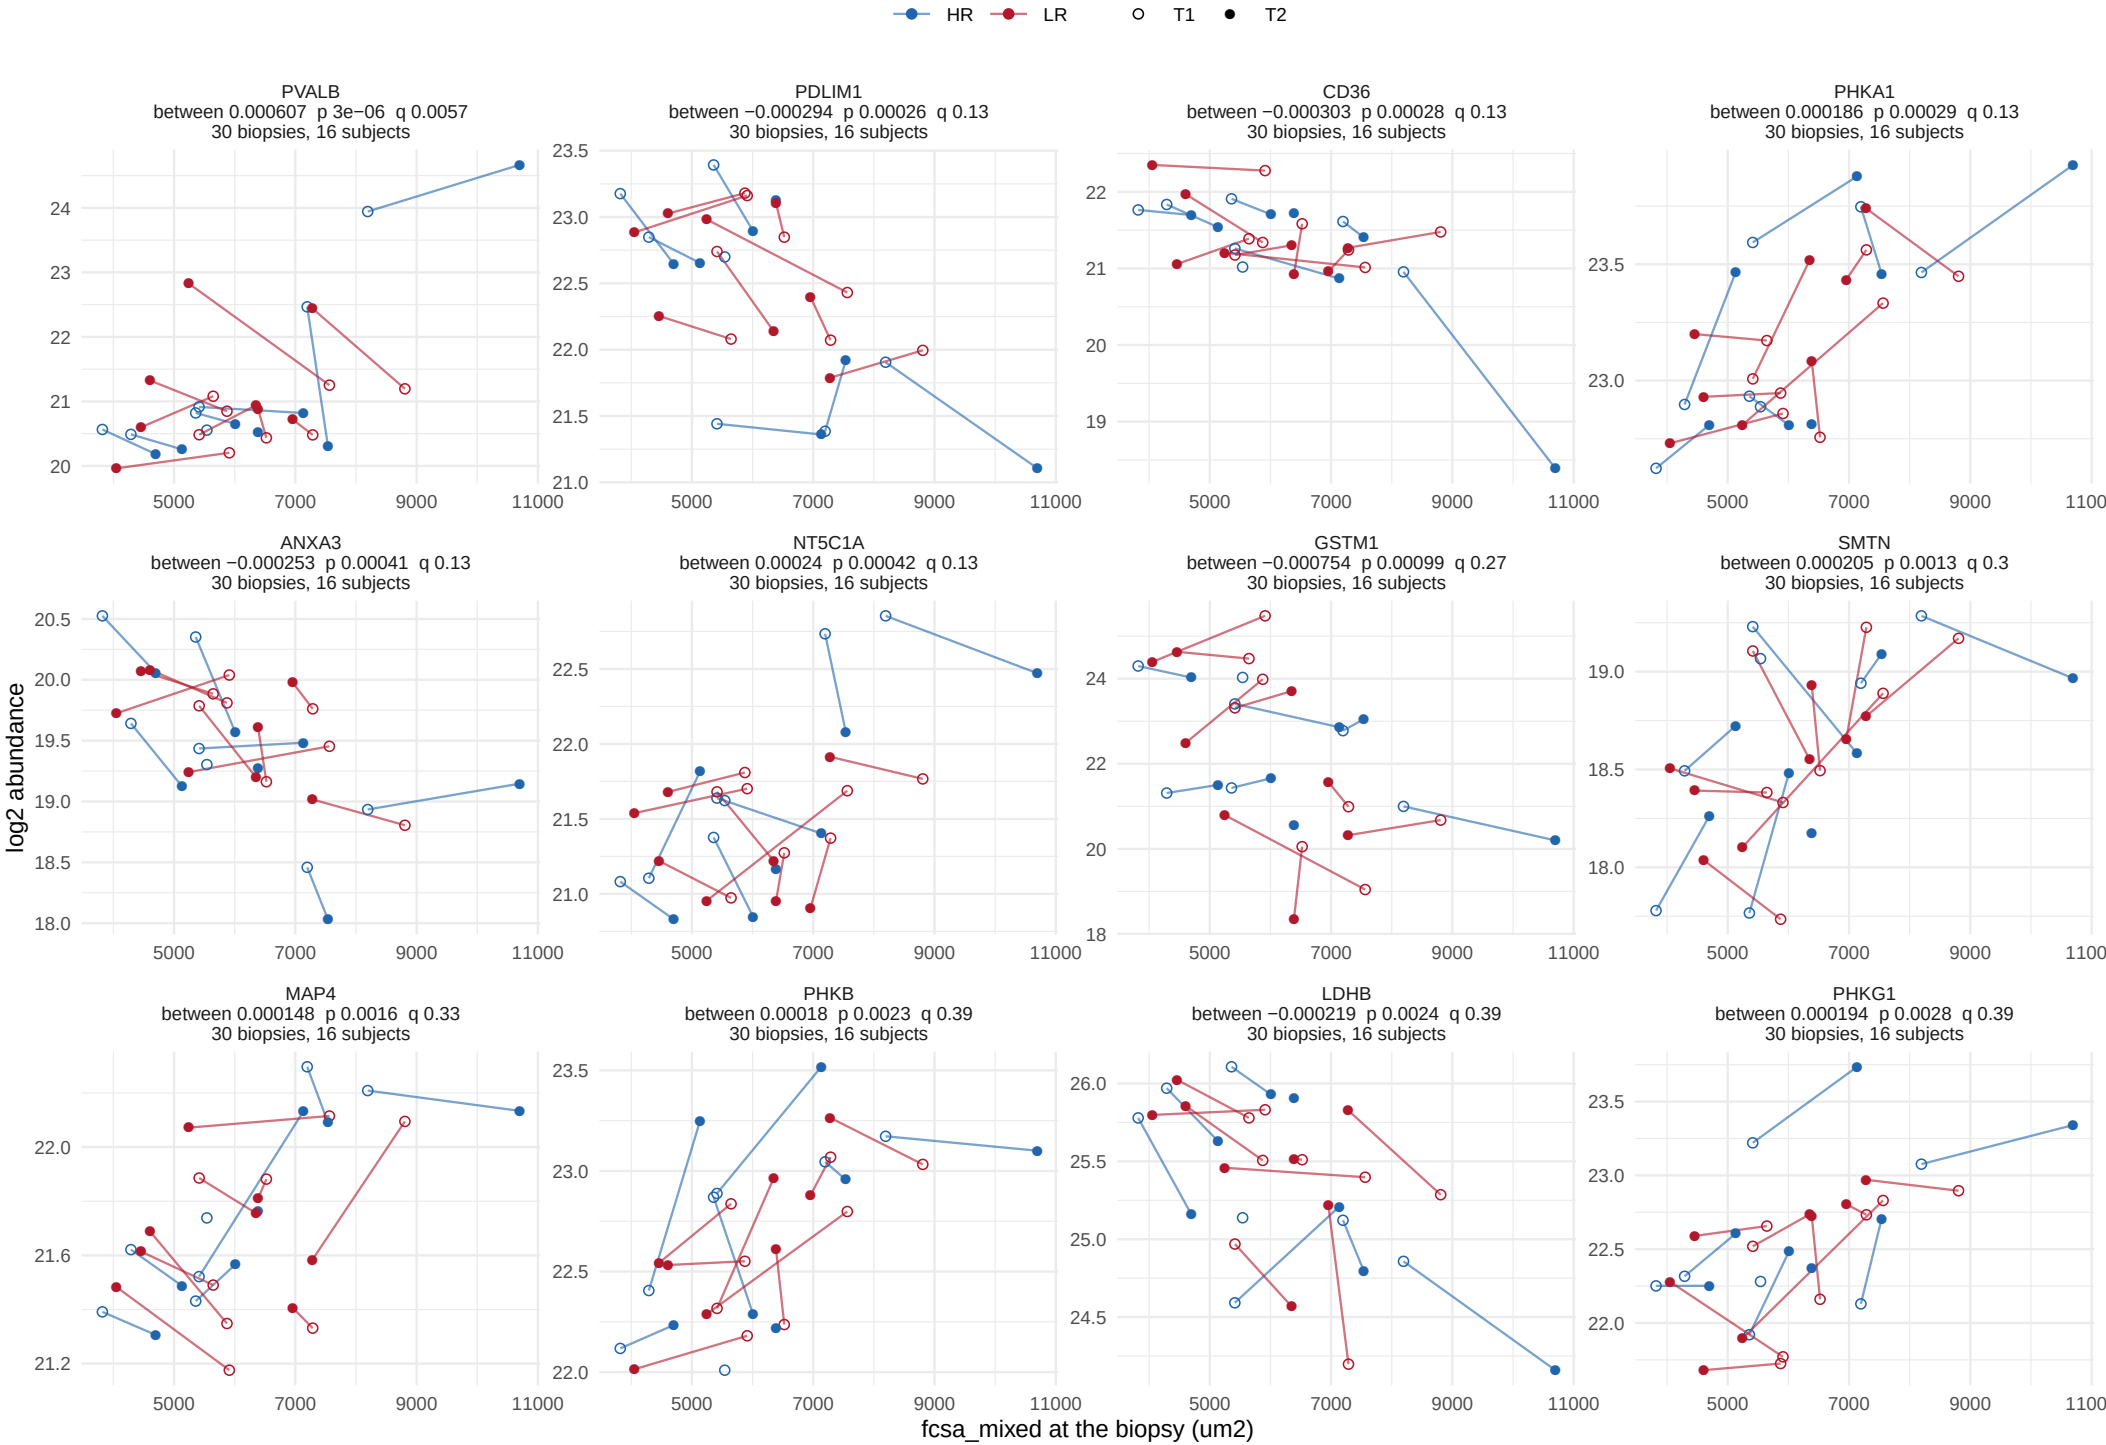

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_mixed, between−person term


76 of 1900 proteins at p < 0.05, 1 at BH < 0.05. Page 2 of 7.

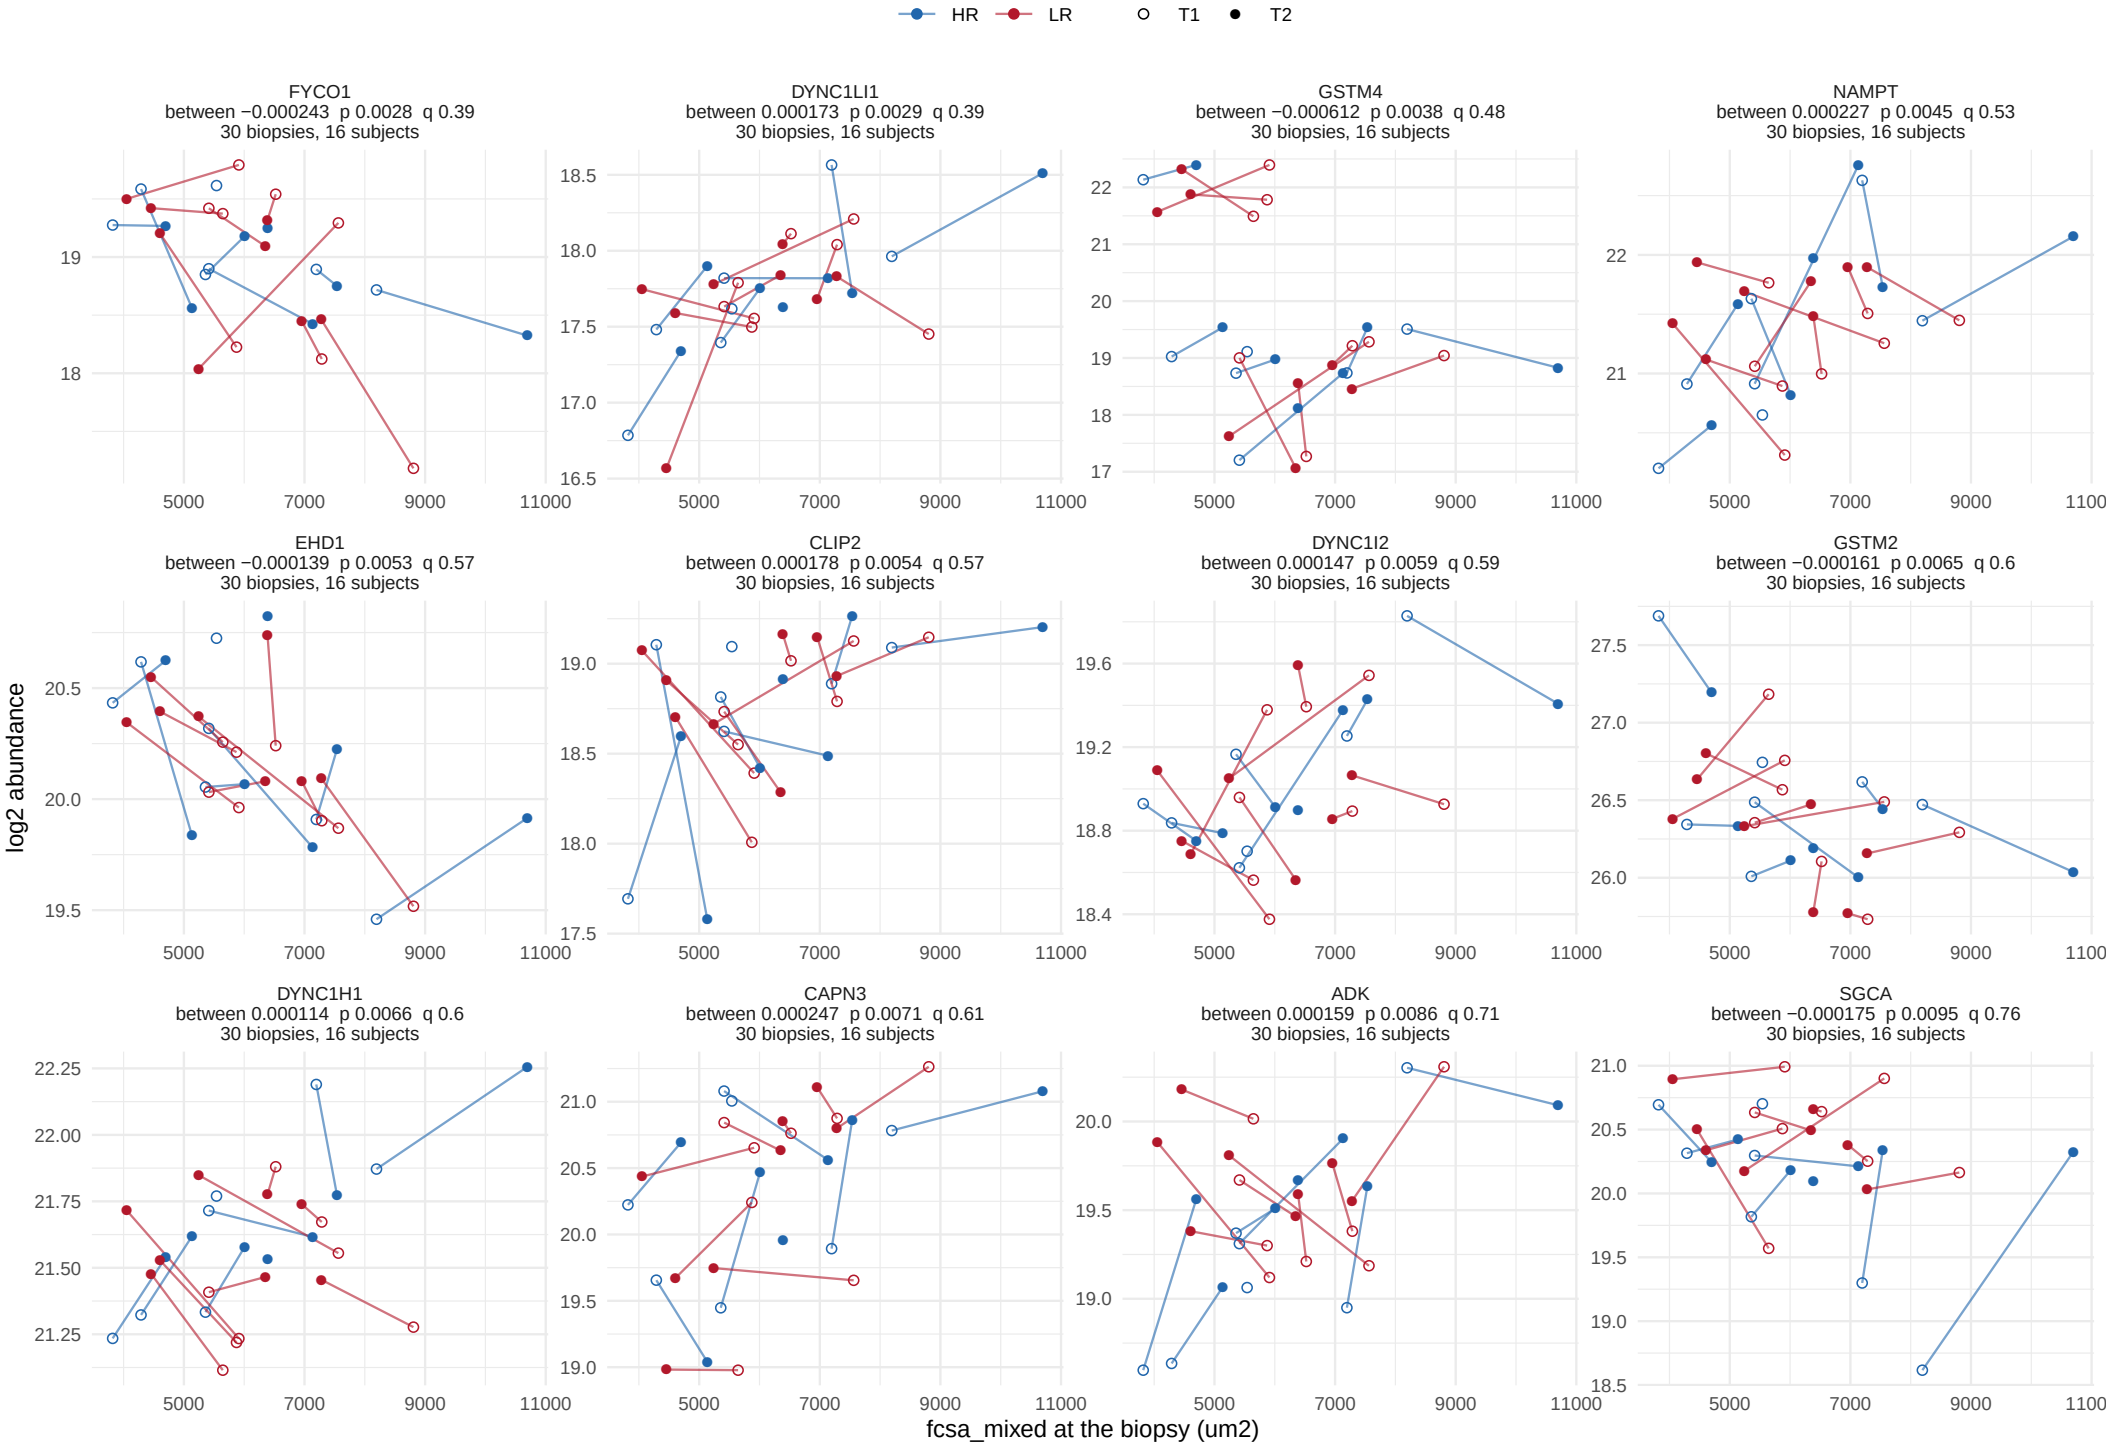

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_mixed, between−person term


76 of 1900 proteins at p < 0.05, 1 at BH < 0.05. Page 3 of 7.

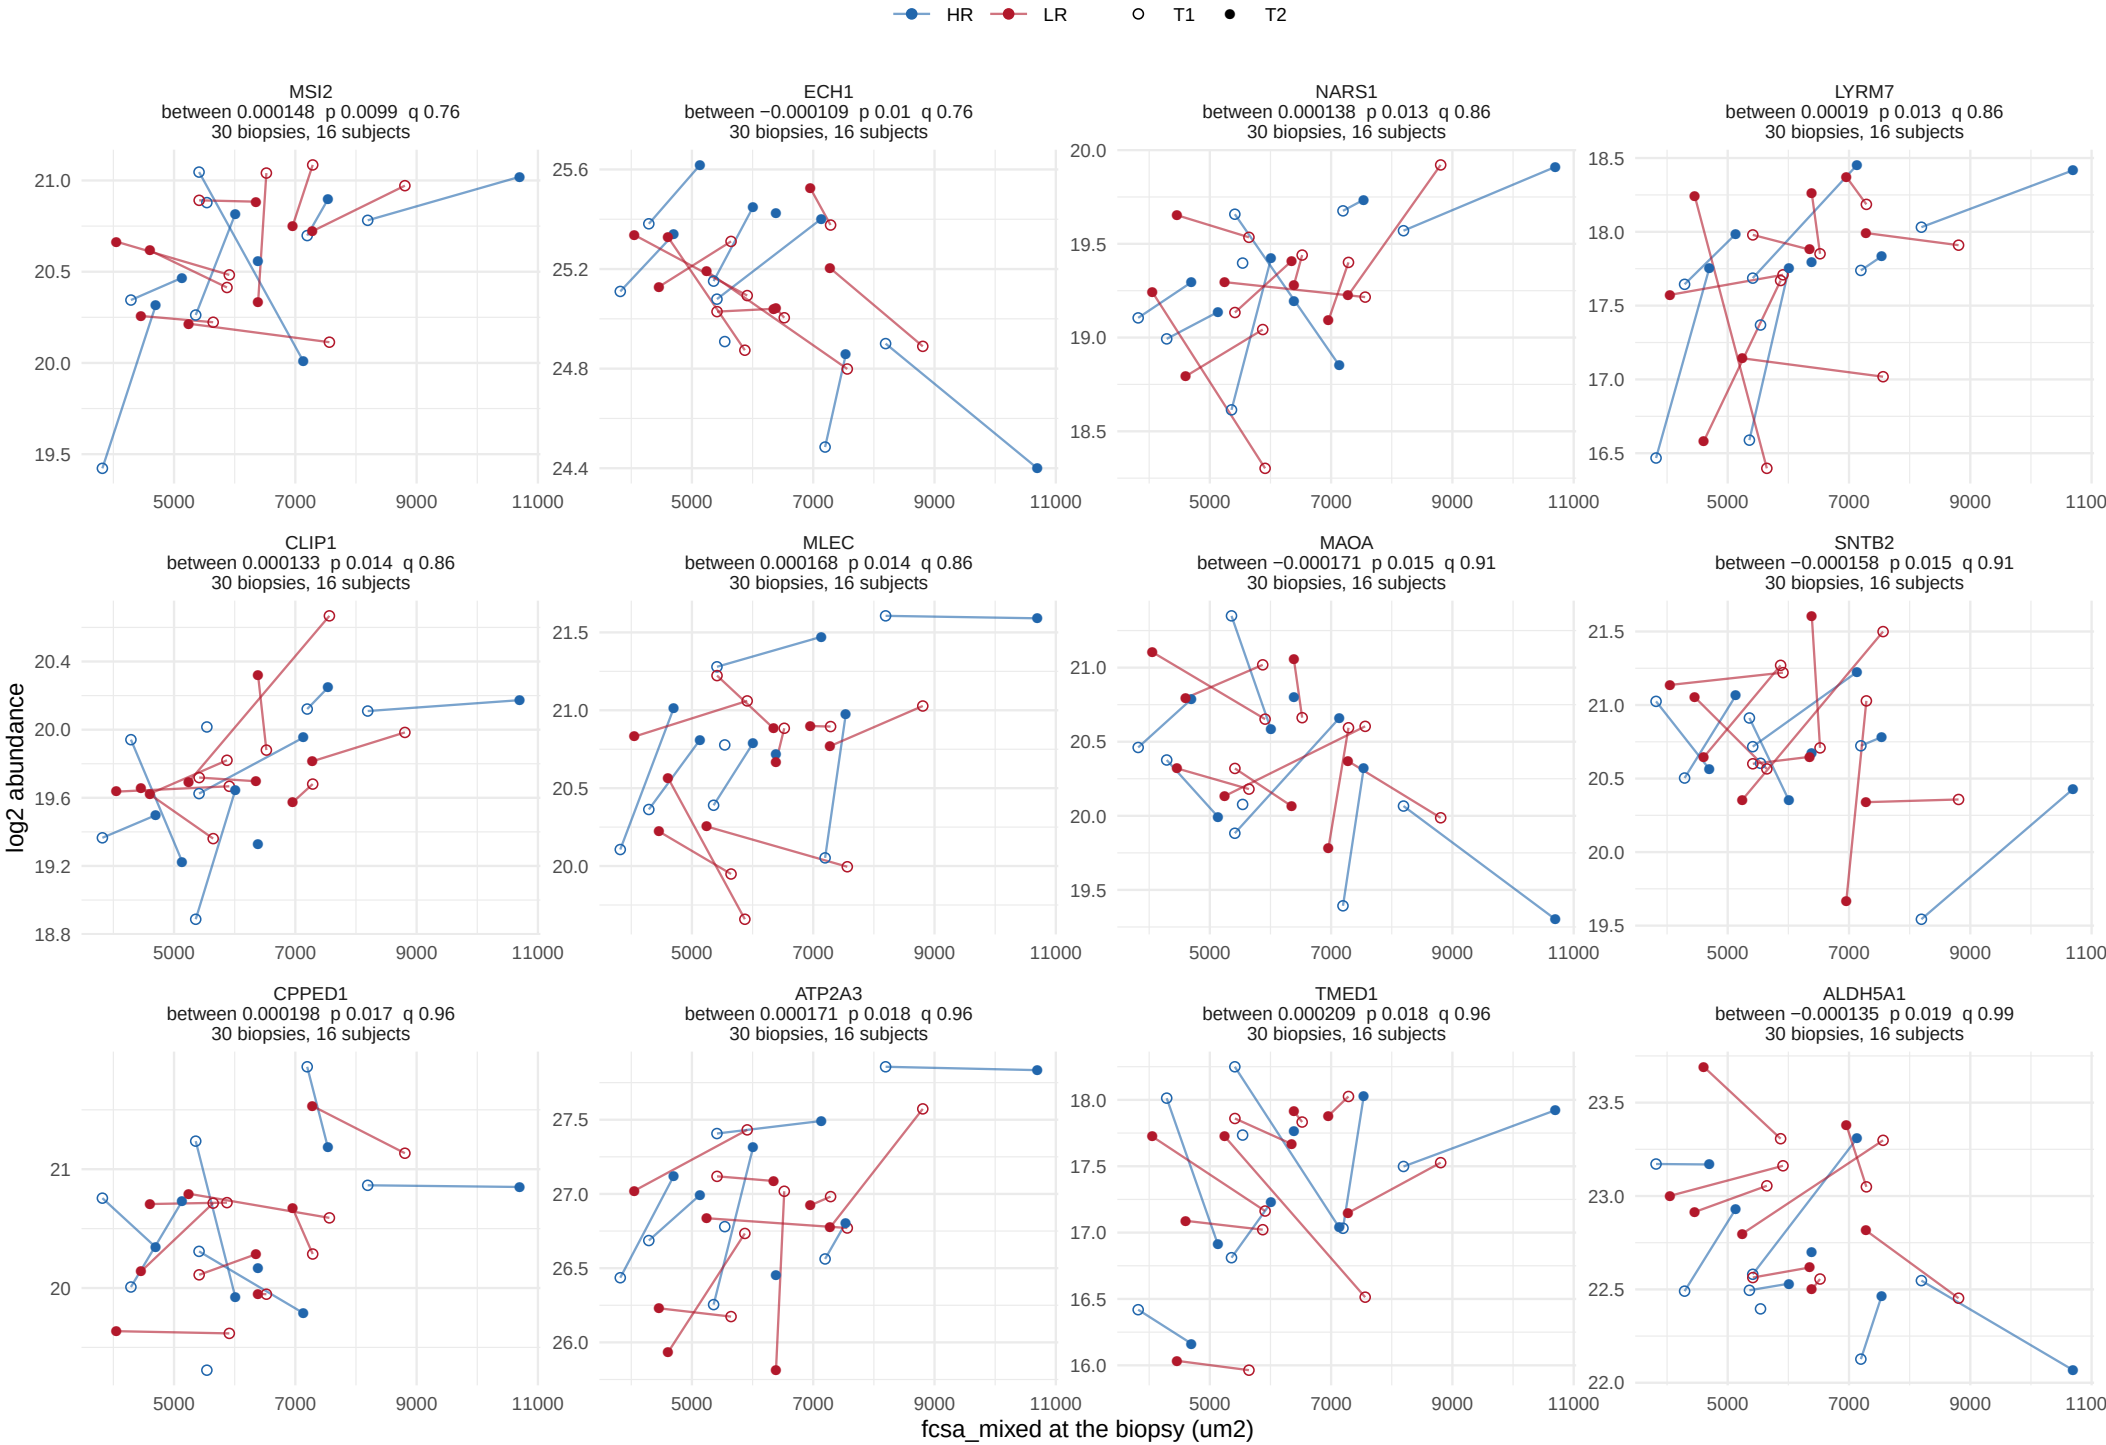

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_mixed, between−person term


76 of 1900 proteins at p < 0.05, 1 at BH < 0.05. Page 4 of 7.

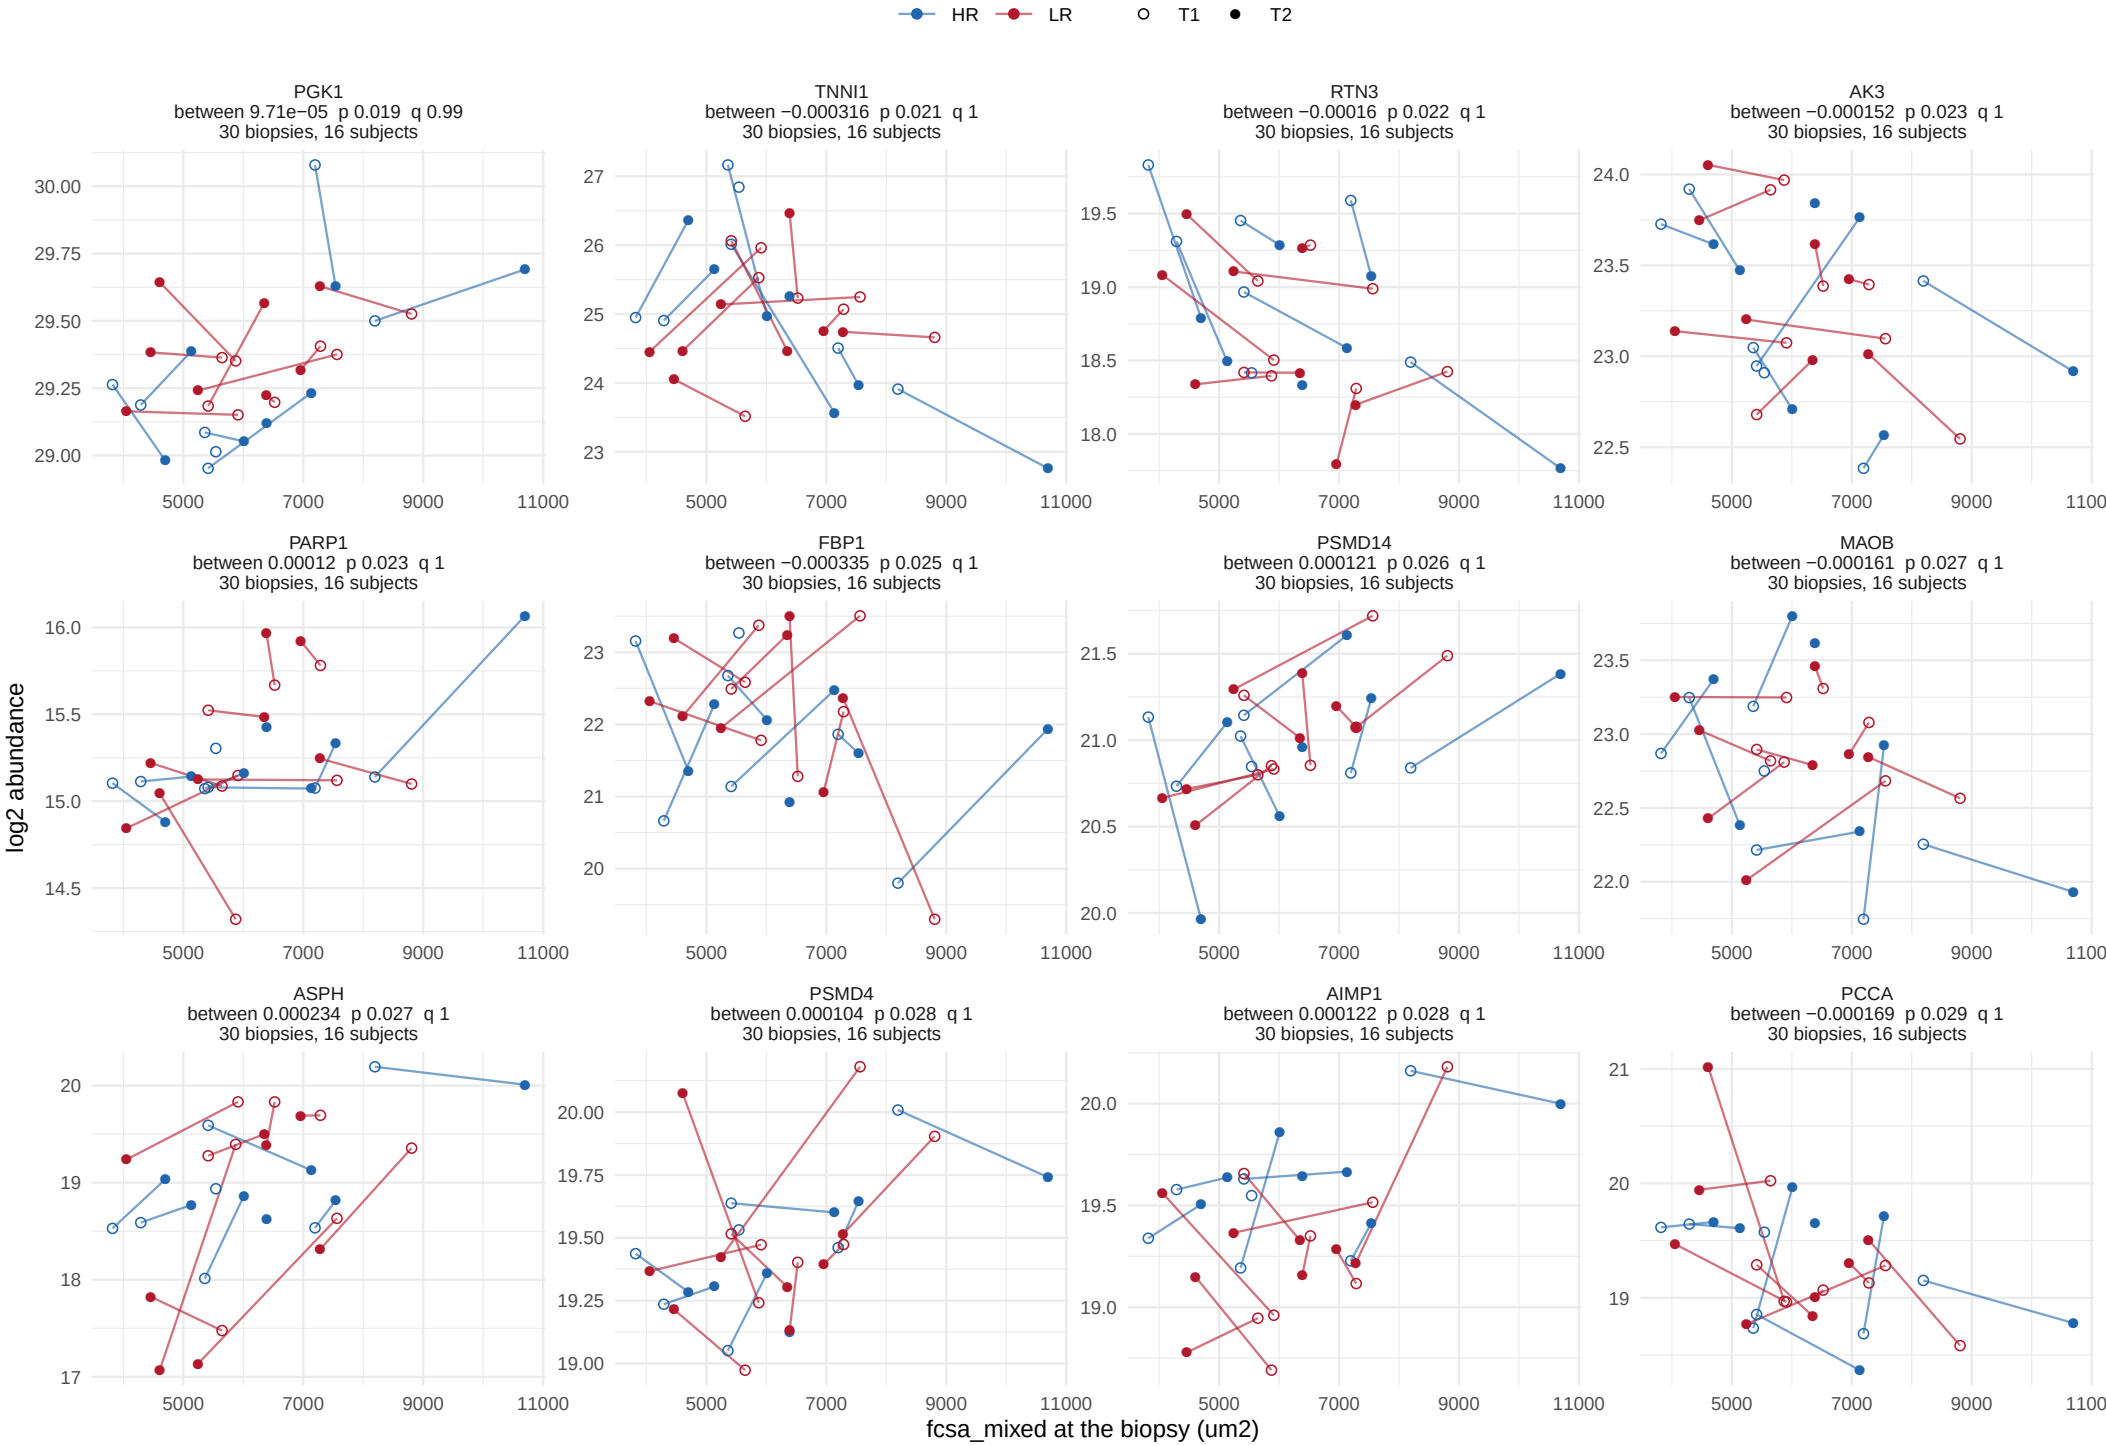

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_mixed, between−person term


76 of 1900 proteins at p < 0.05, 1 at BH < 0.05. Page 5 of 7.

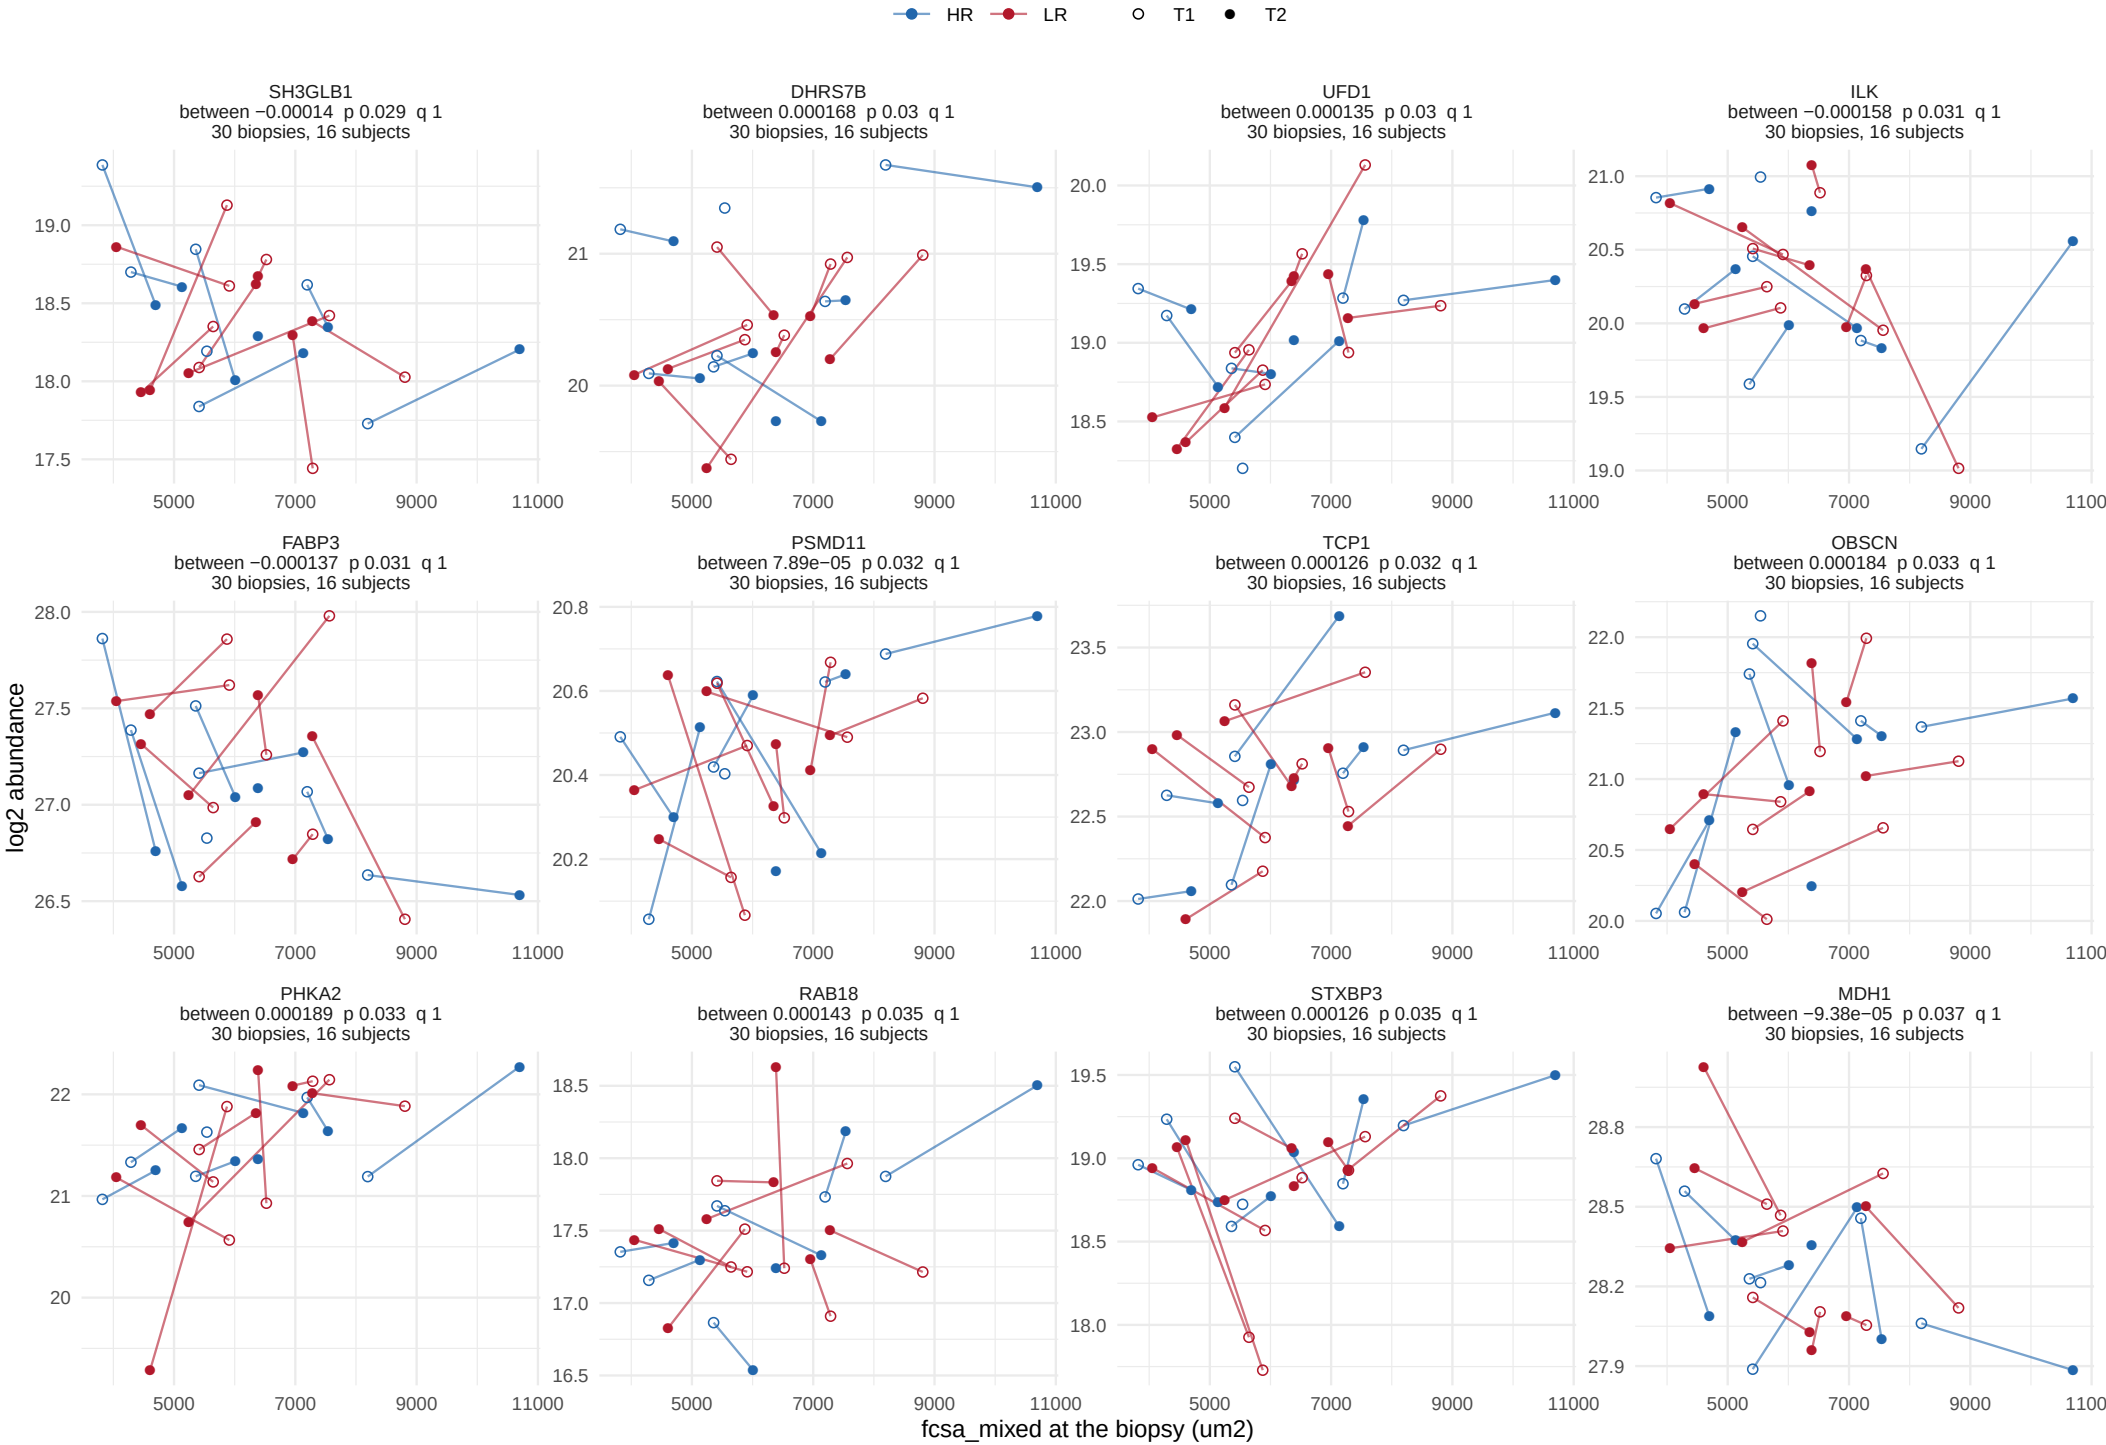

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_mixed, between−person term


76 of 1900 proteins at p < 0.05, 1 at BH < 0.05. Page 6 of 7.

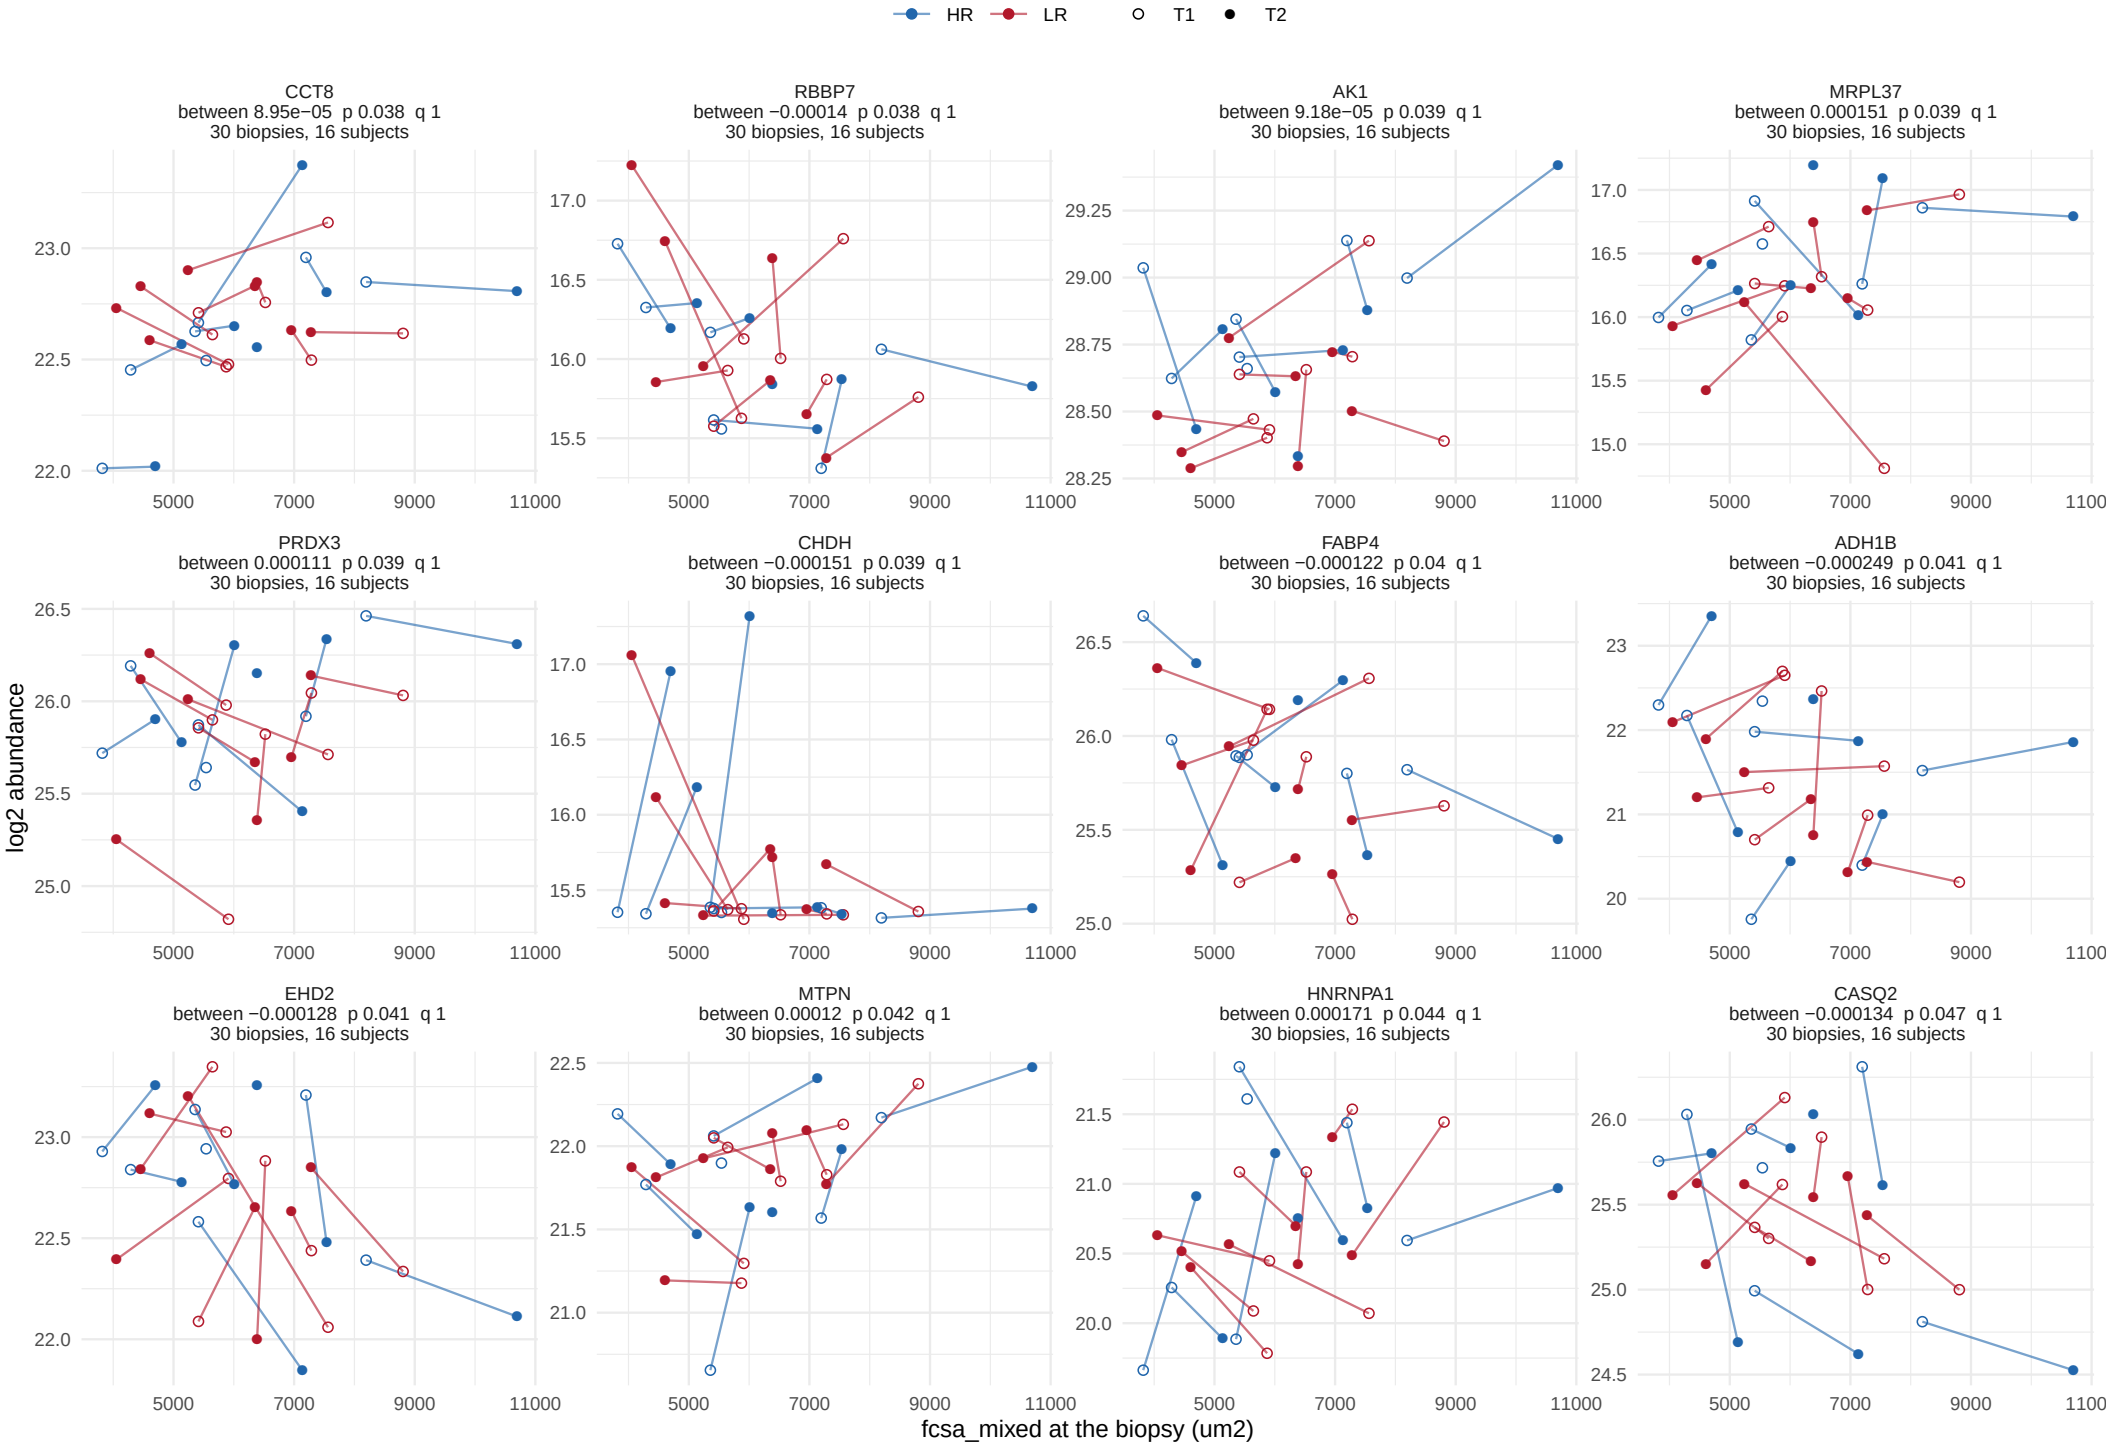

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_mixed, between−person term


76 of 1900 proteins at p < 0.05, 1 at BH < 0.05. Page 7 of 7.

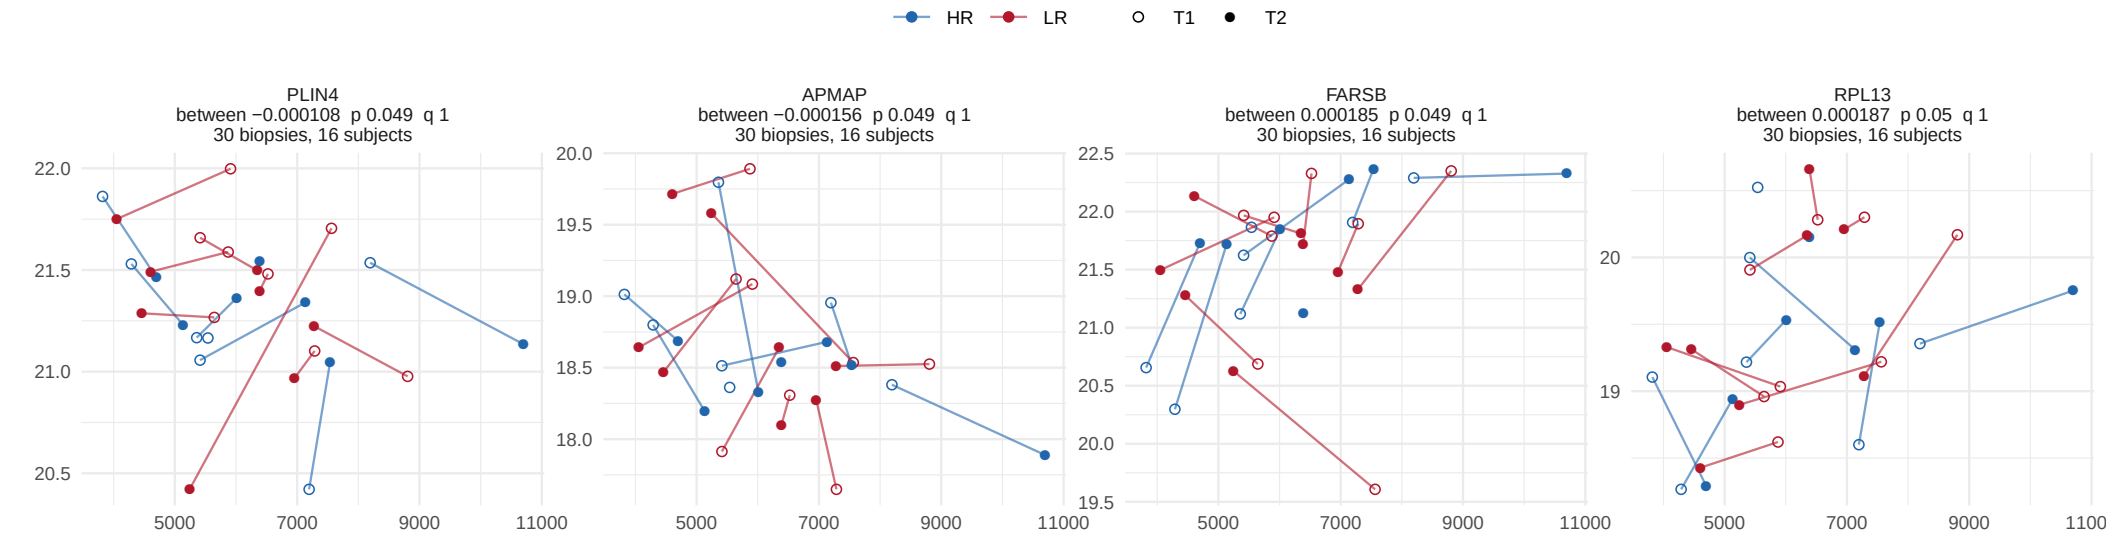

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_type1, within−person term


69 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 1 of 6.

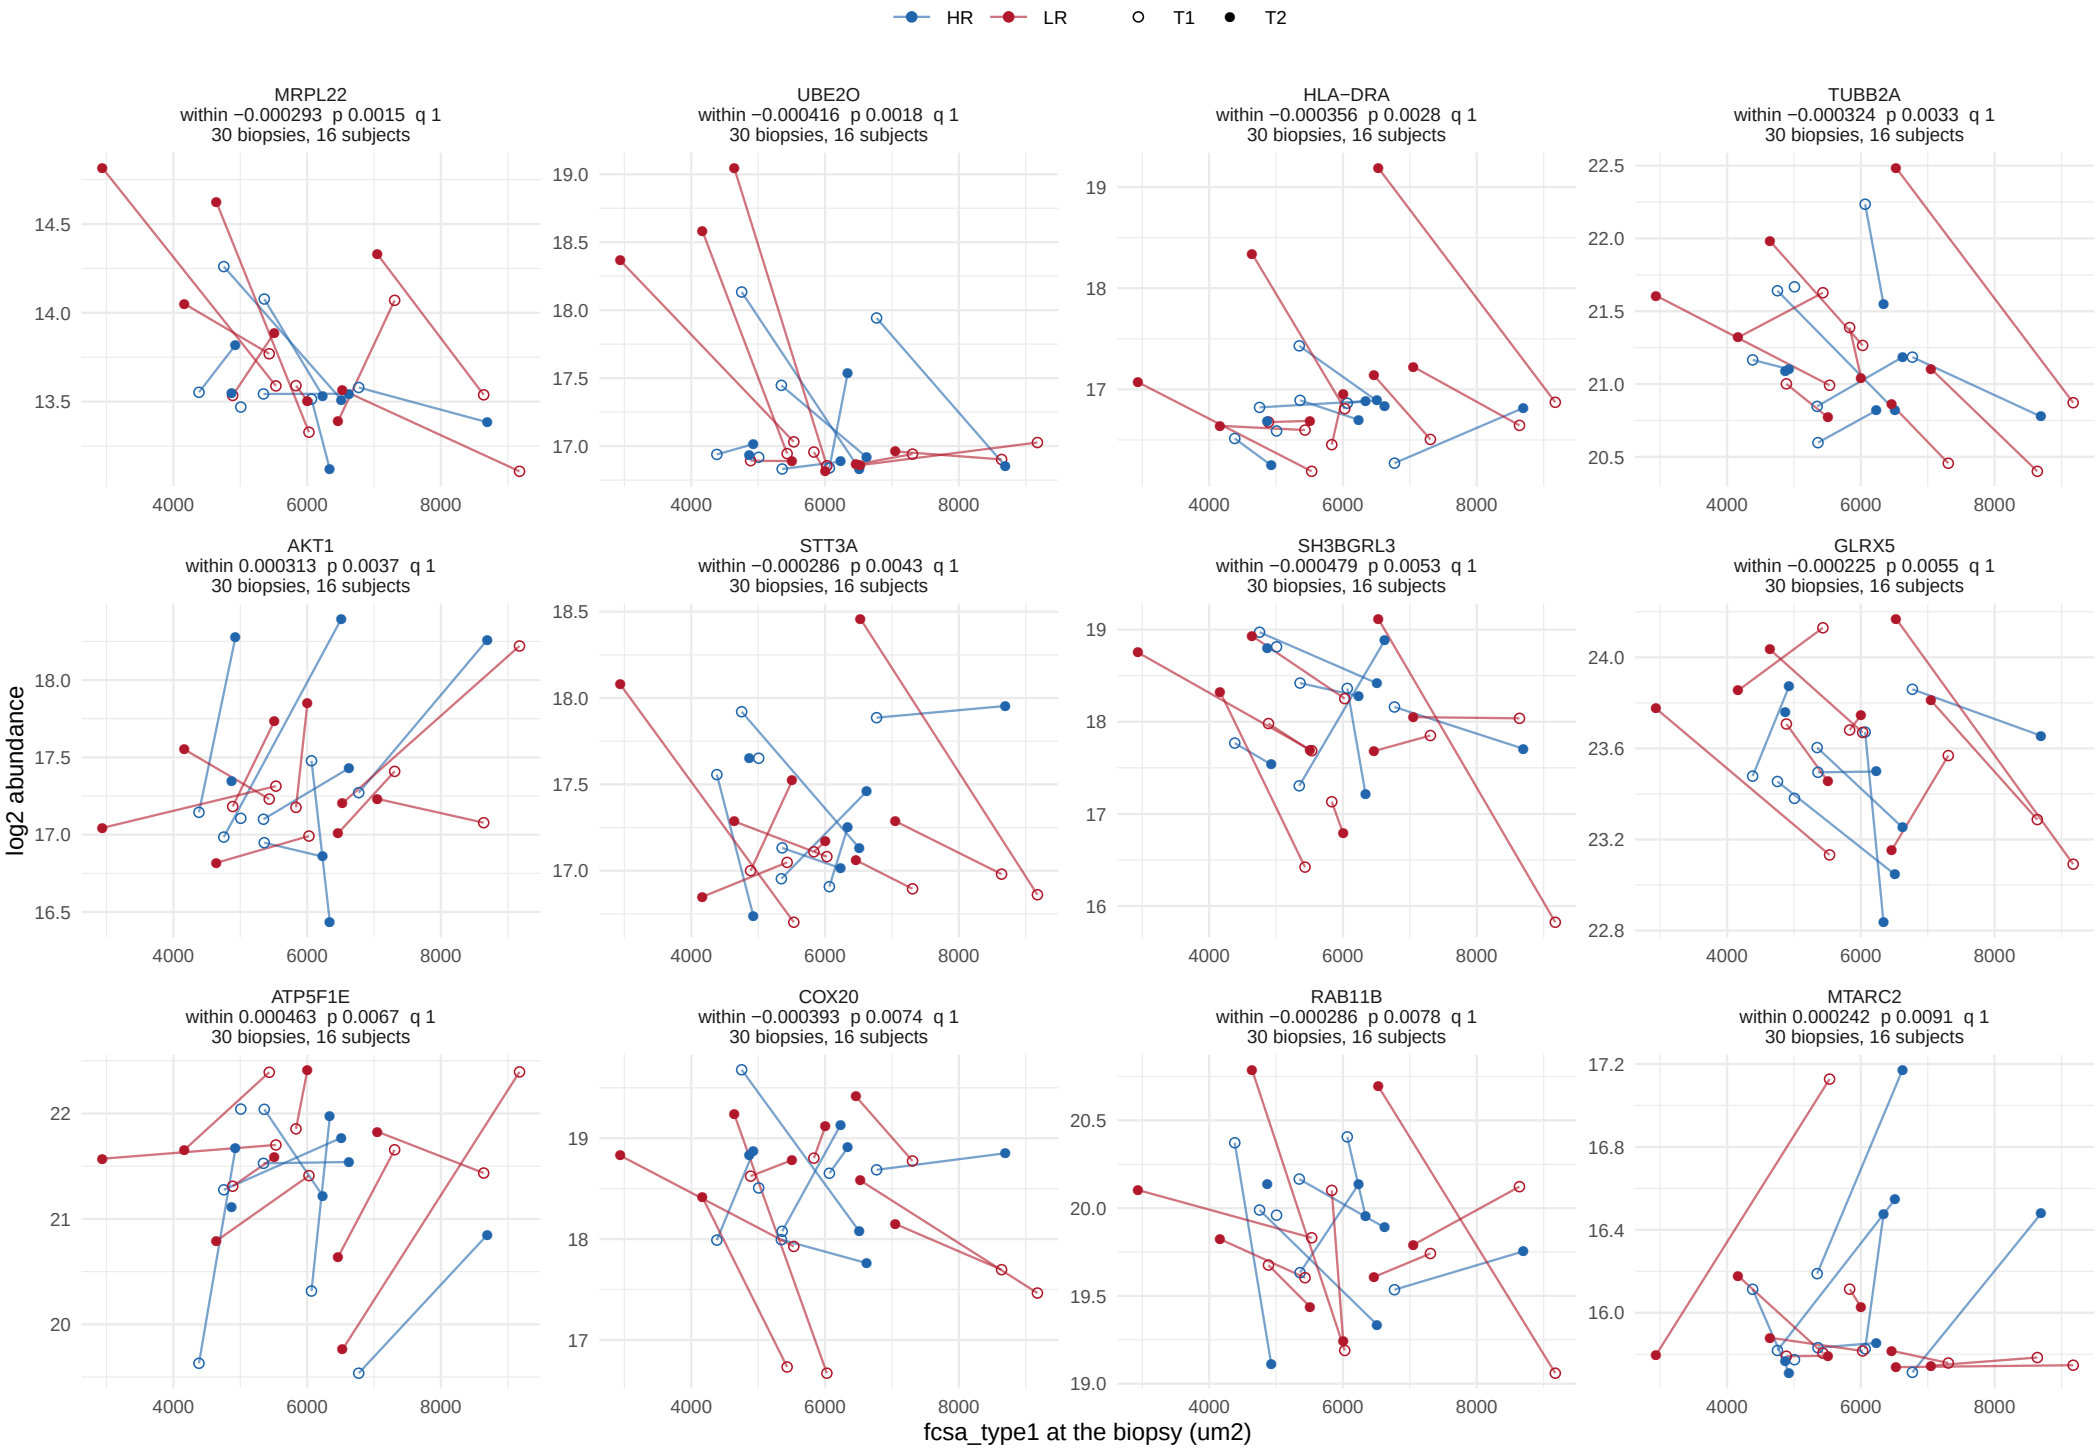

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_type1, within−person term


69 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 2 of 6.

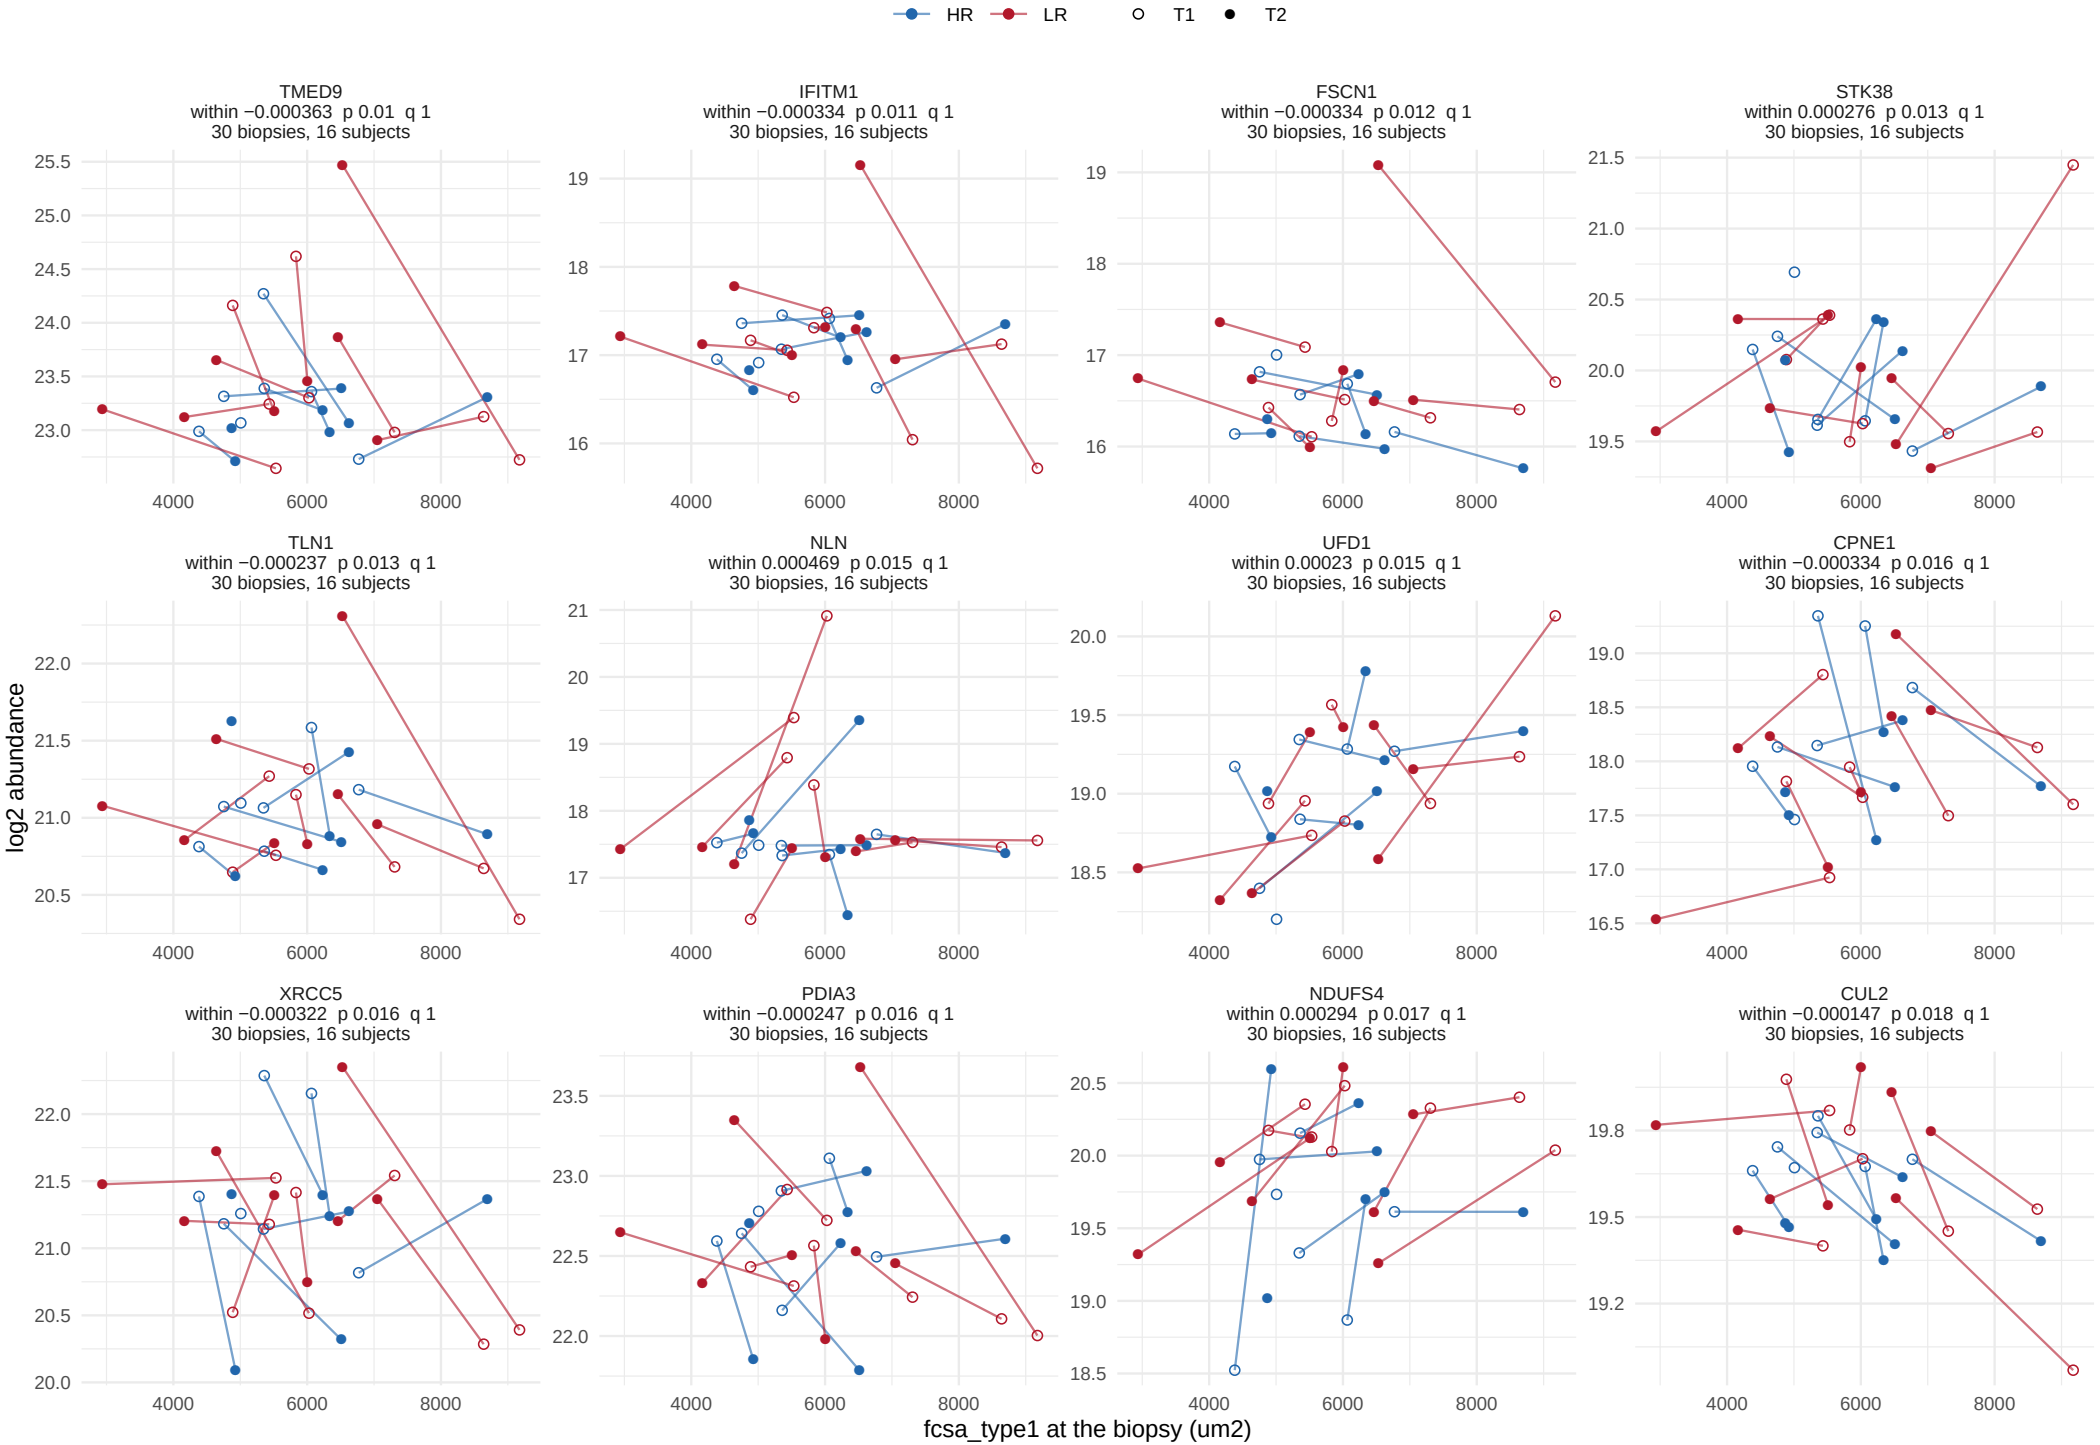

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_type1, within−person term


69 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 3 of 6.

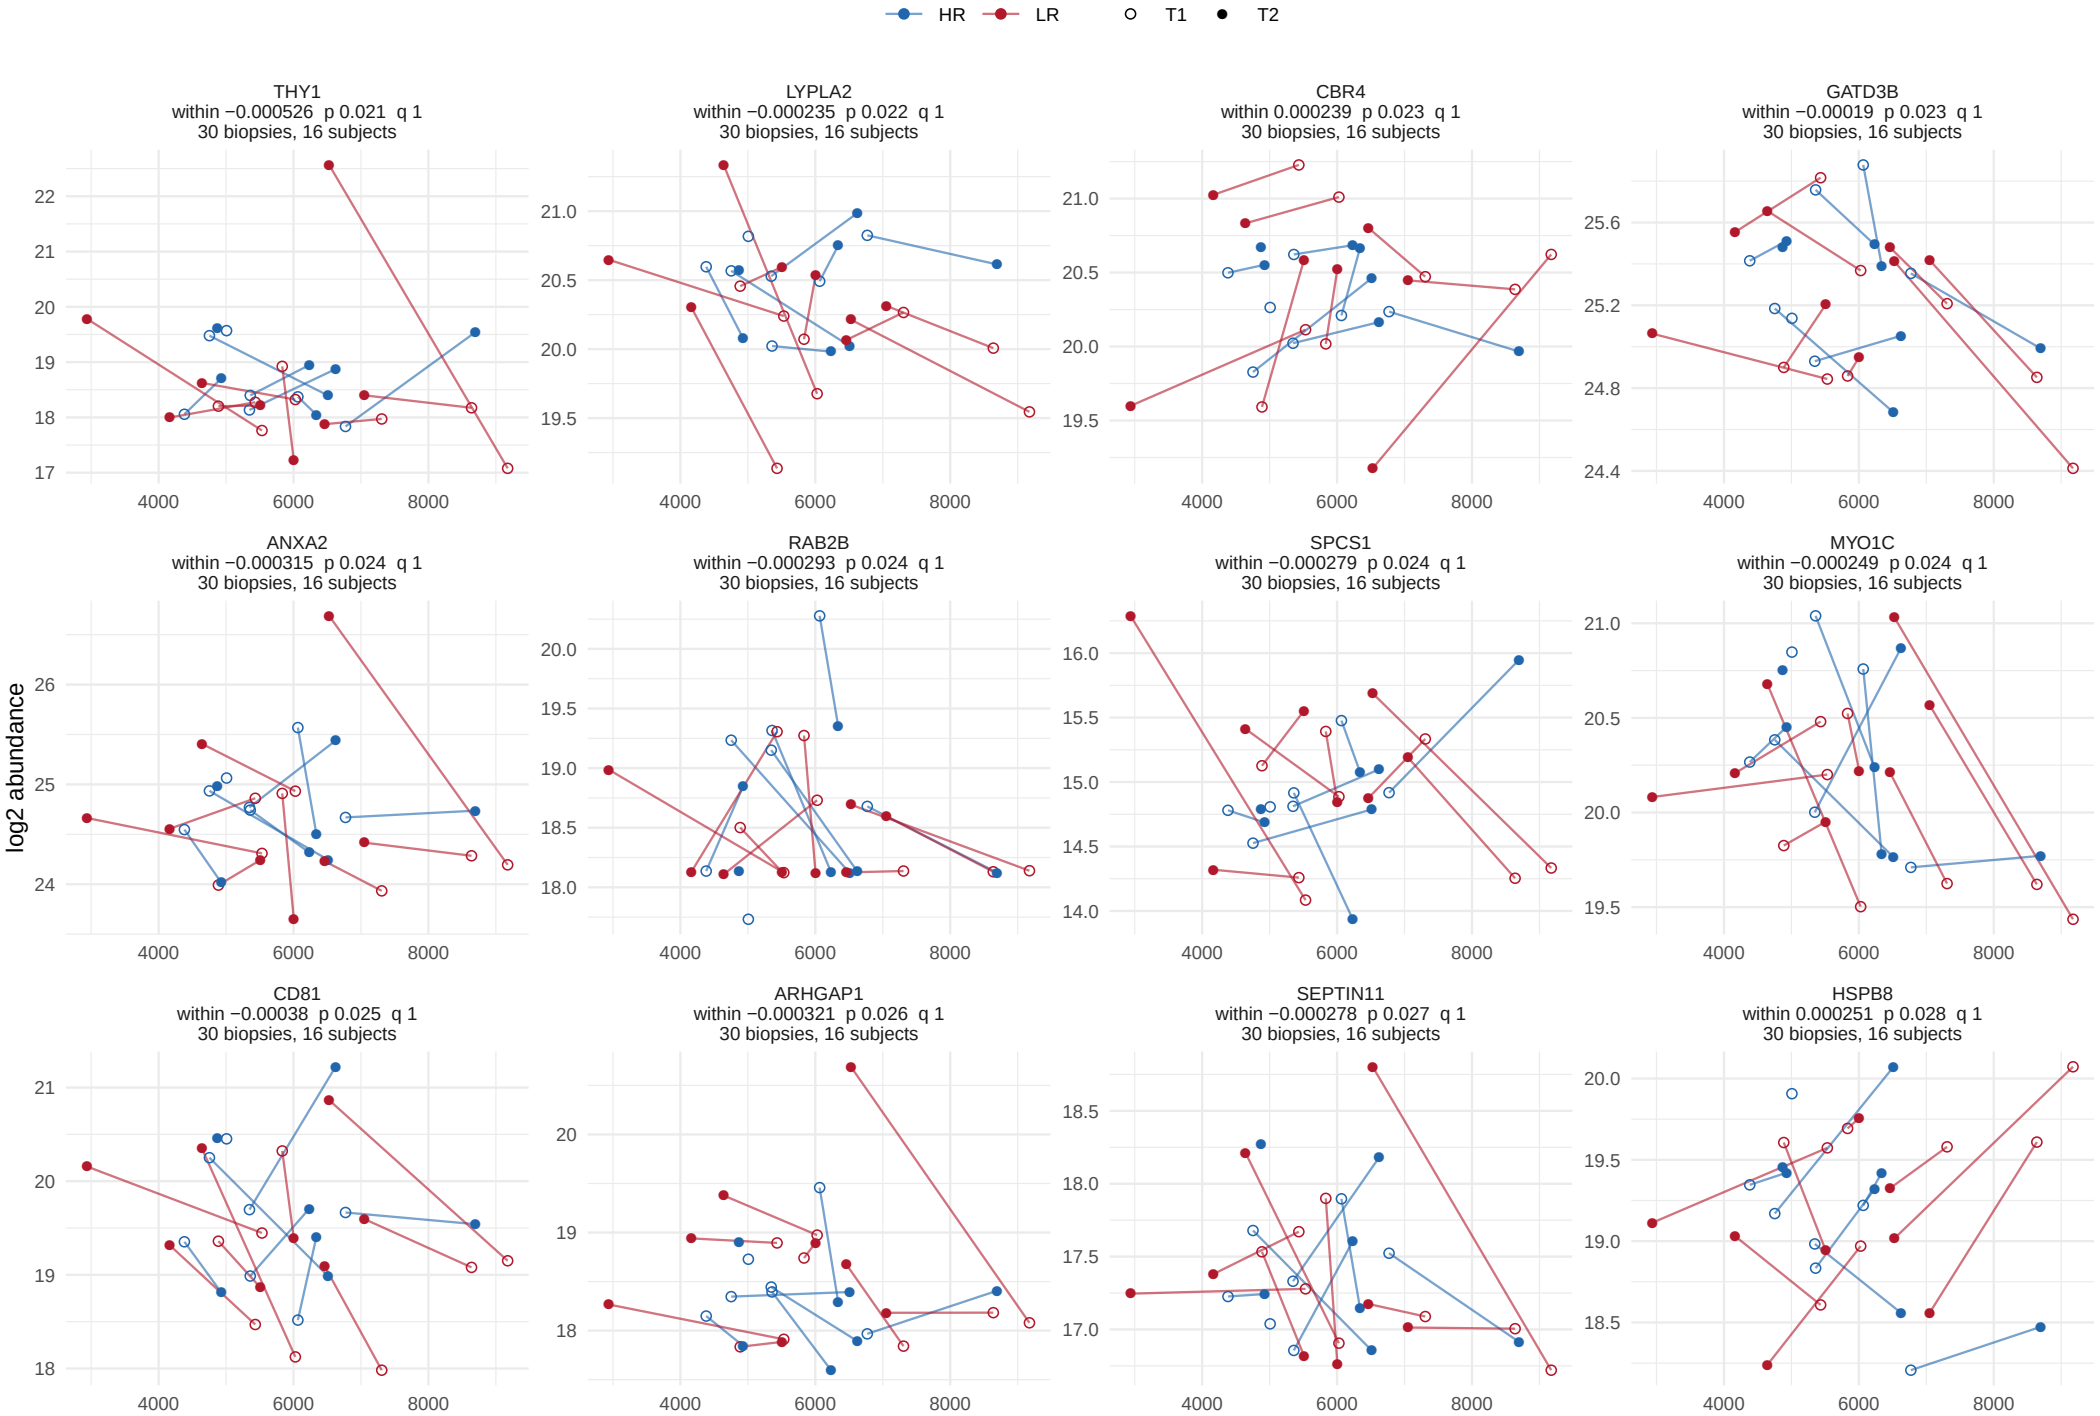

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_type1, within−person term


69 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 4 of 6.

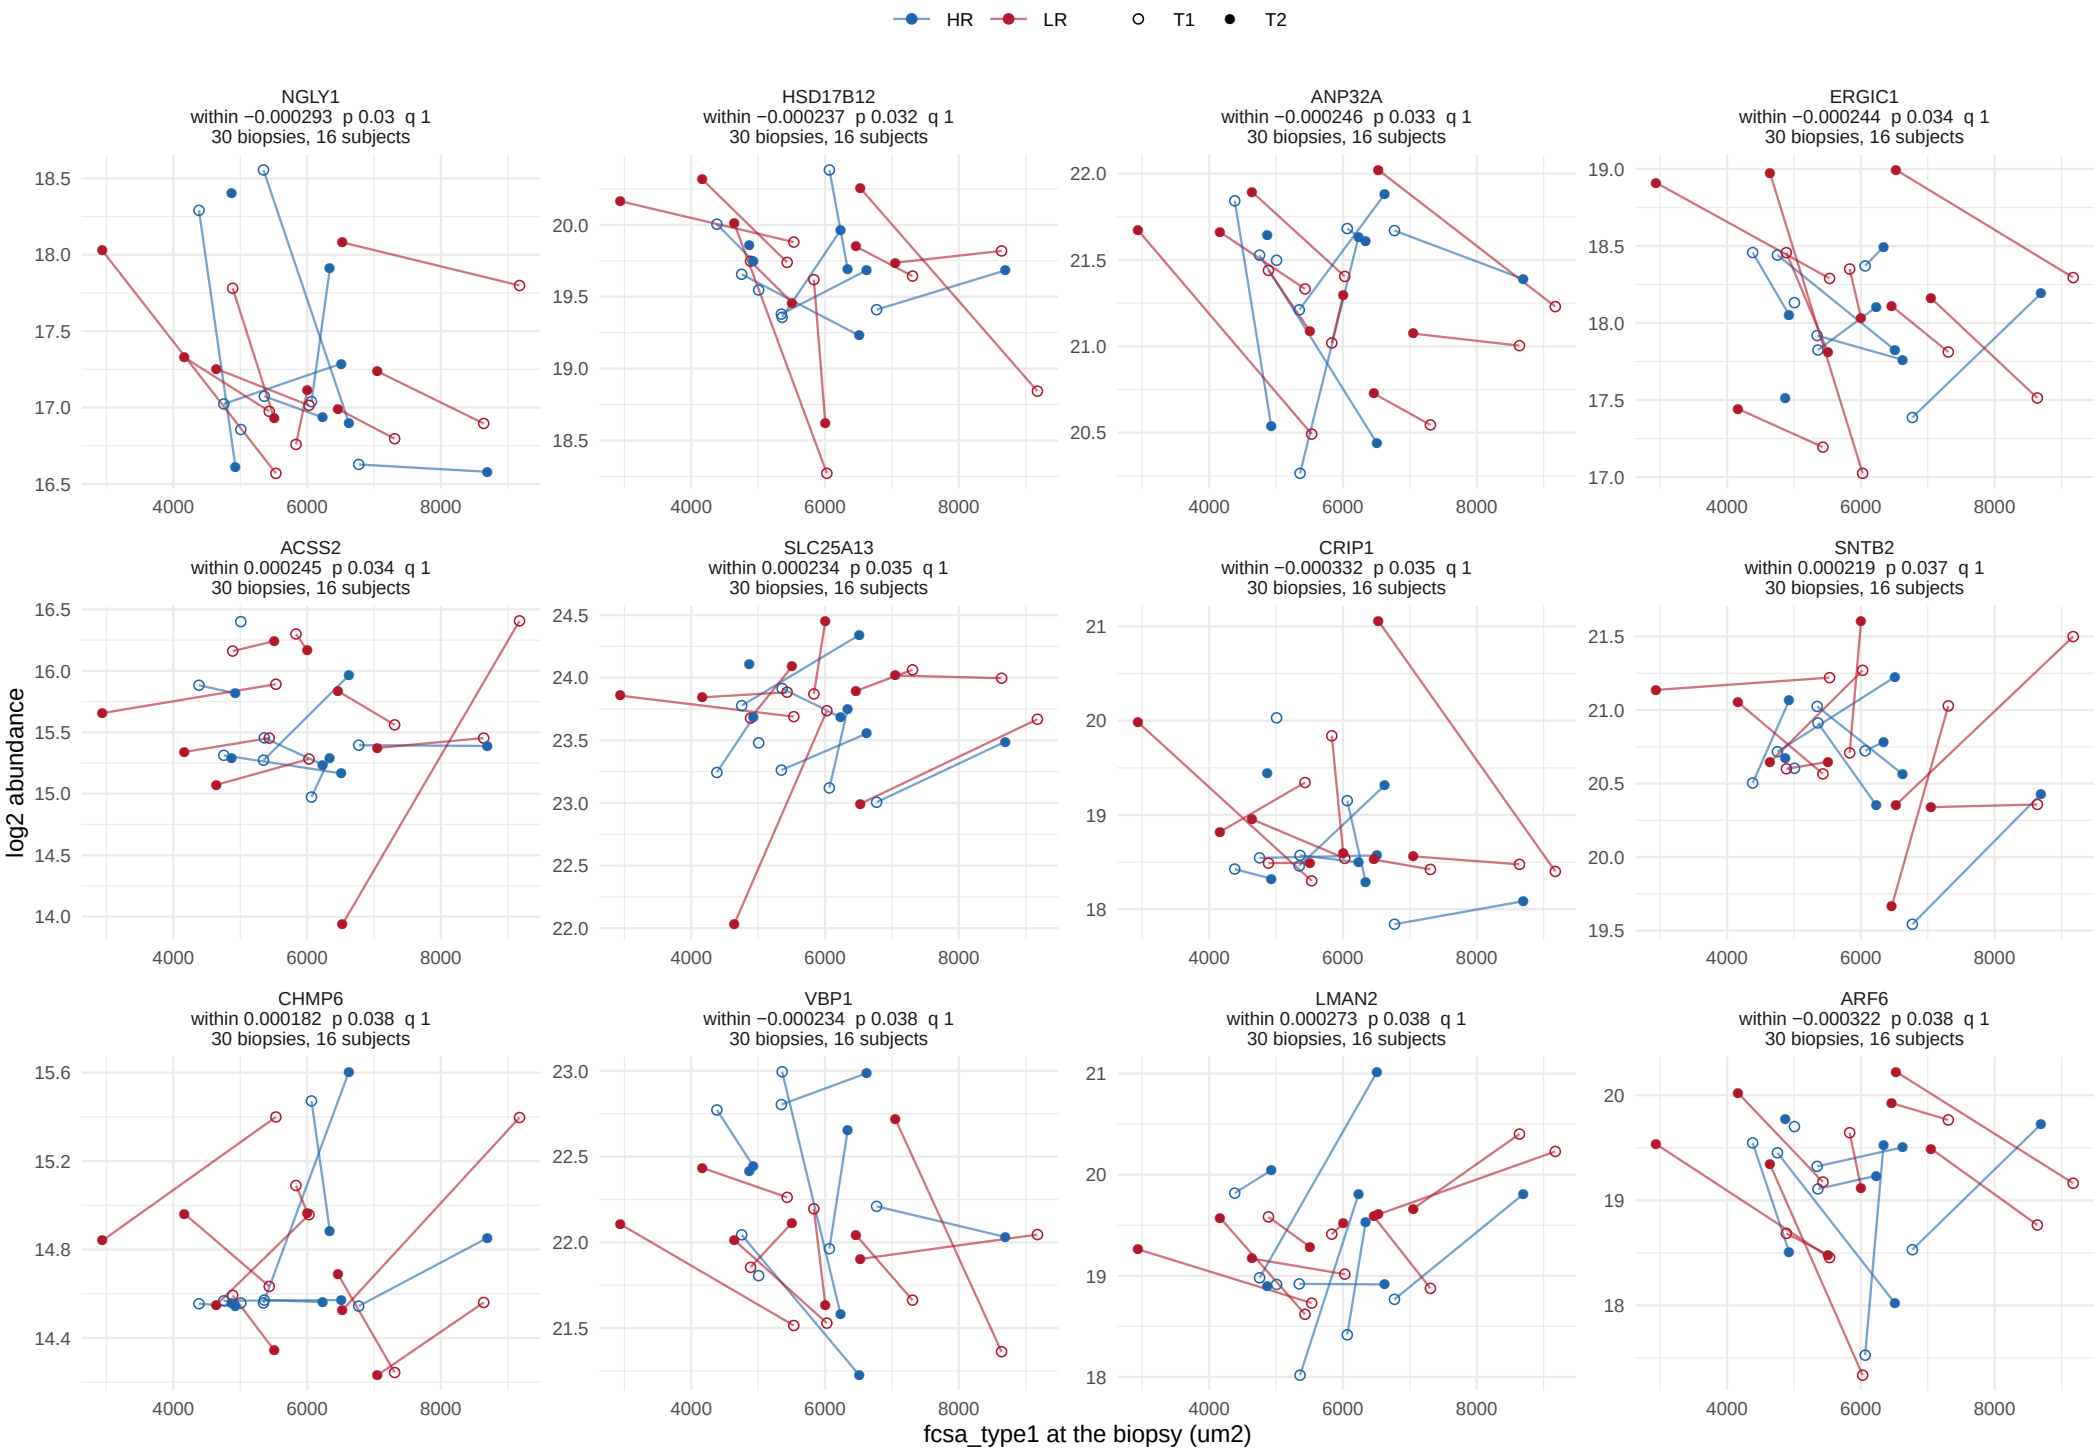

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_type1, within−person term


69 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 5 of 6.

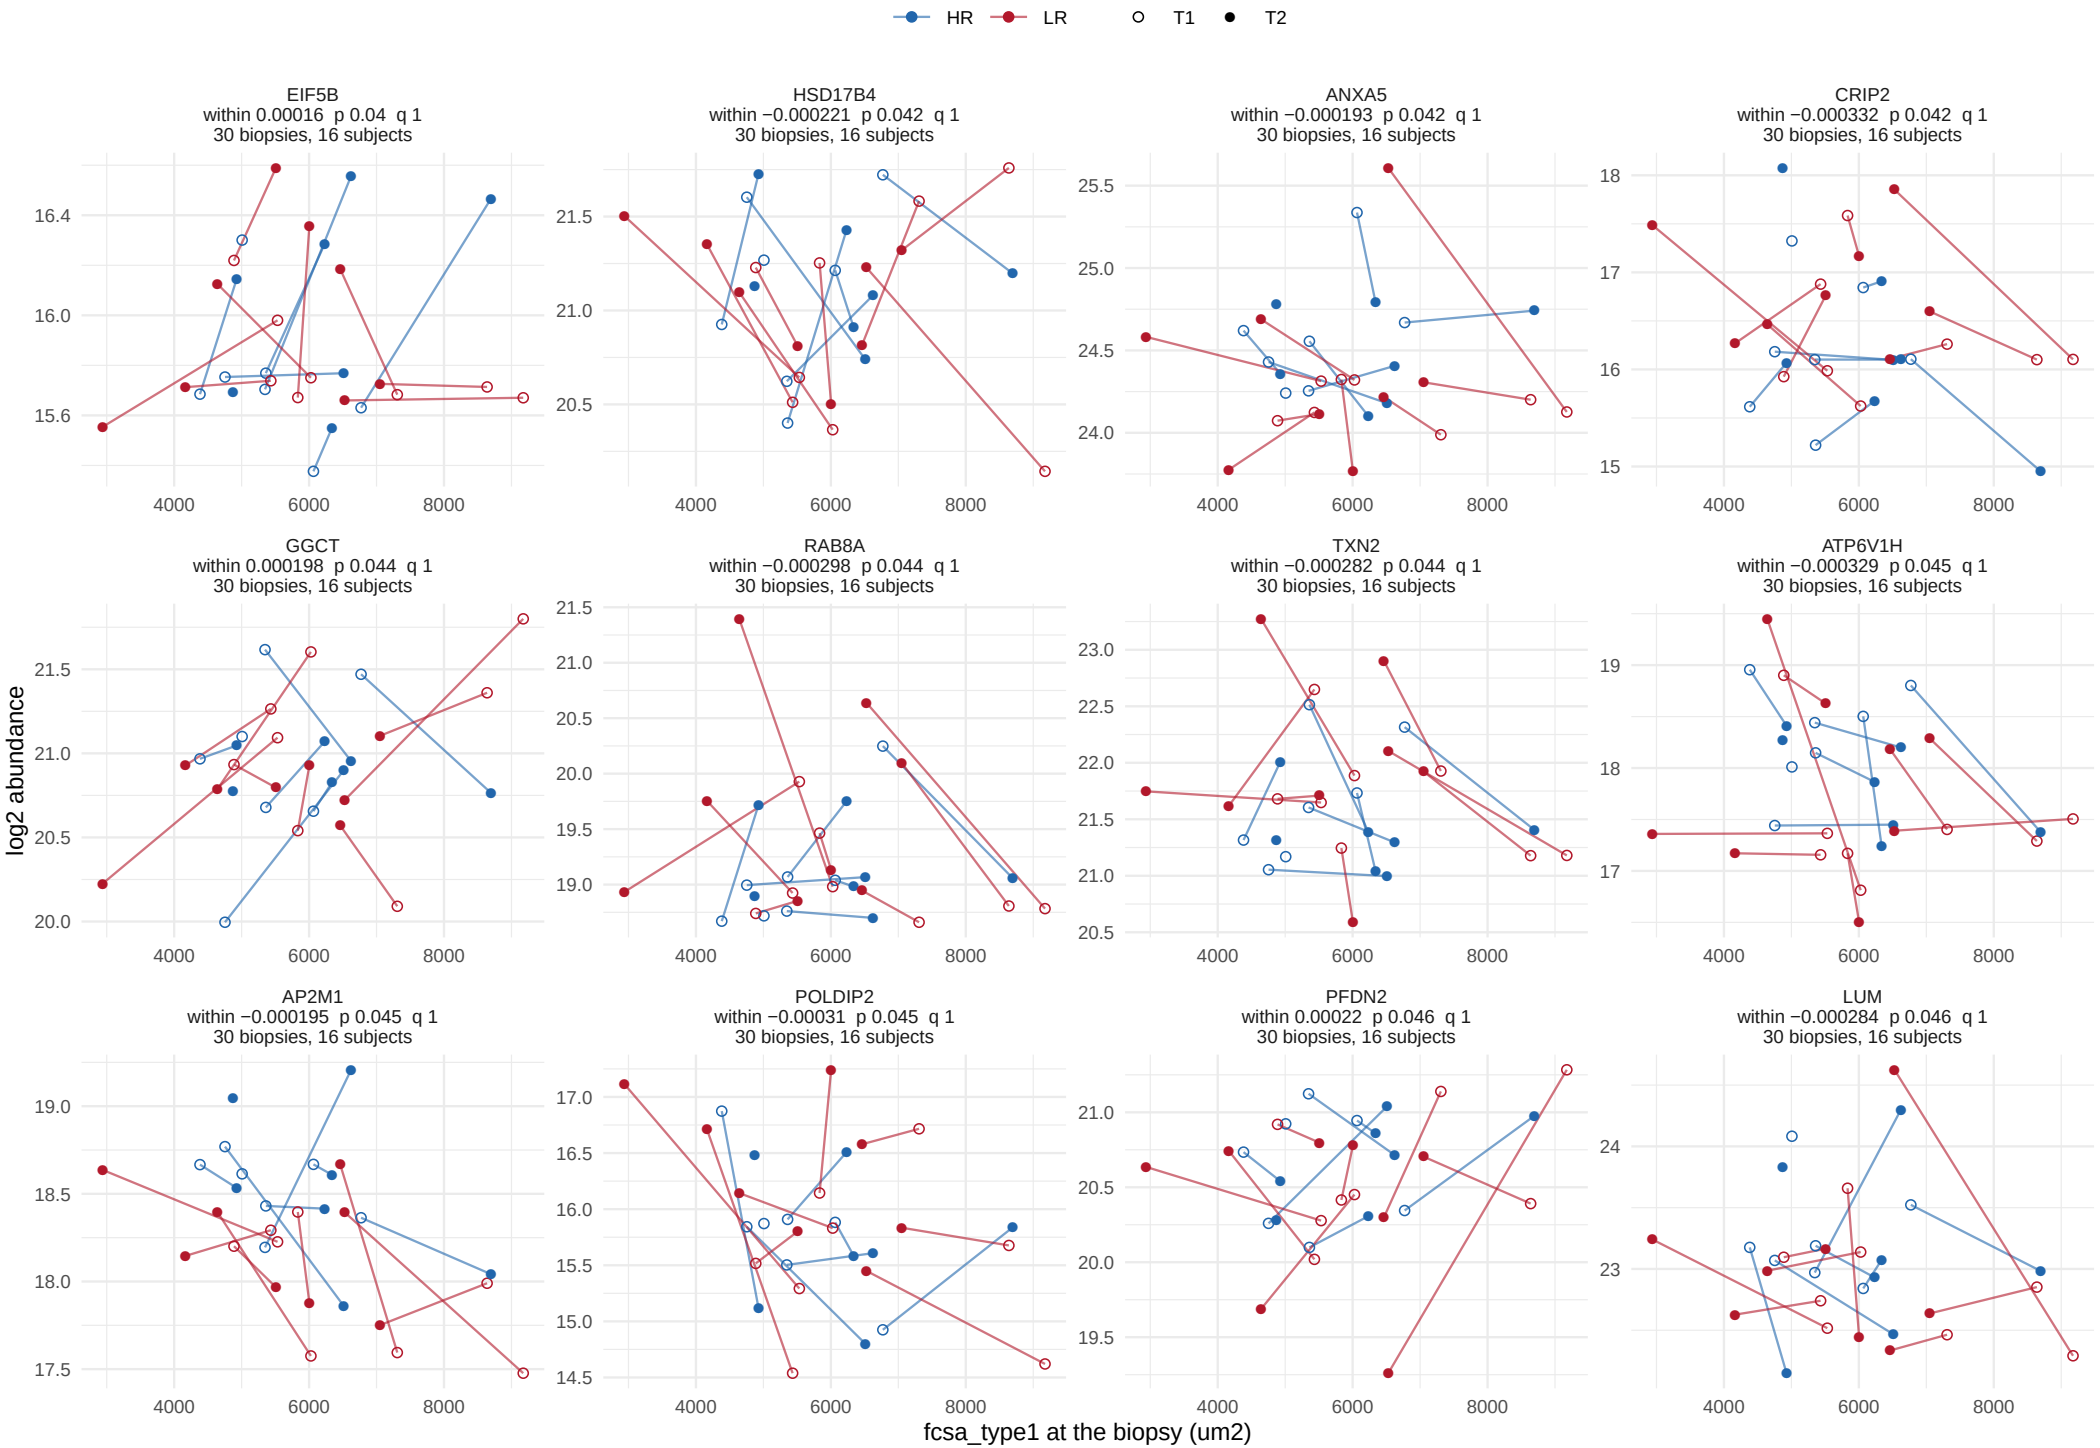

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_type1, within−person term


69 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 6 of 6.

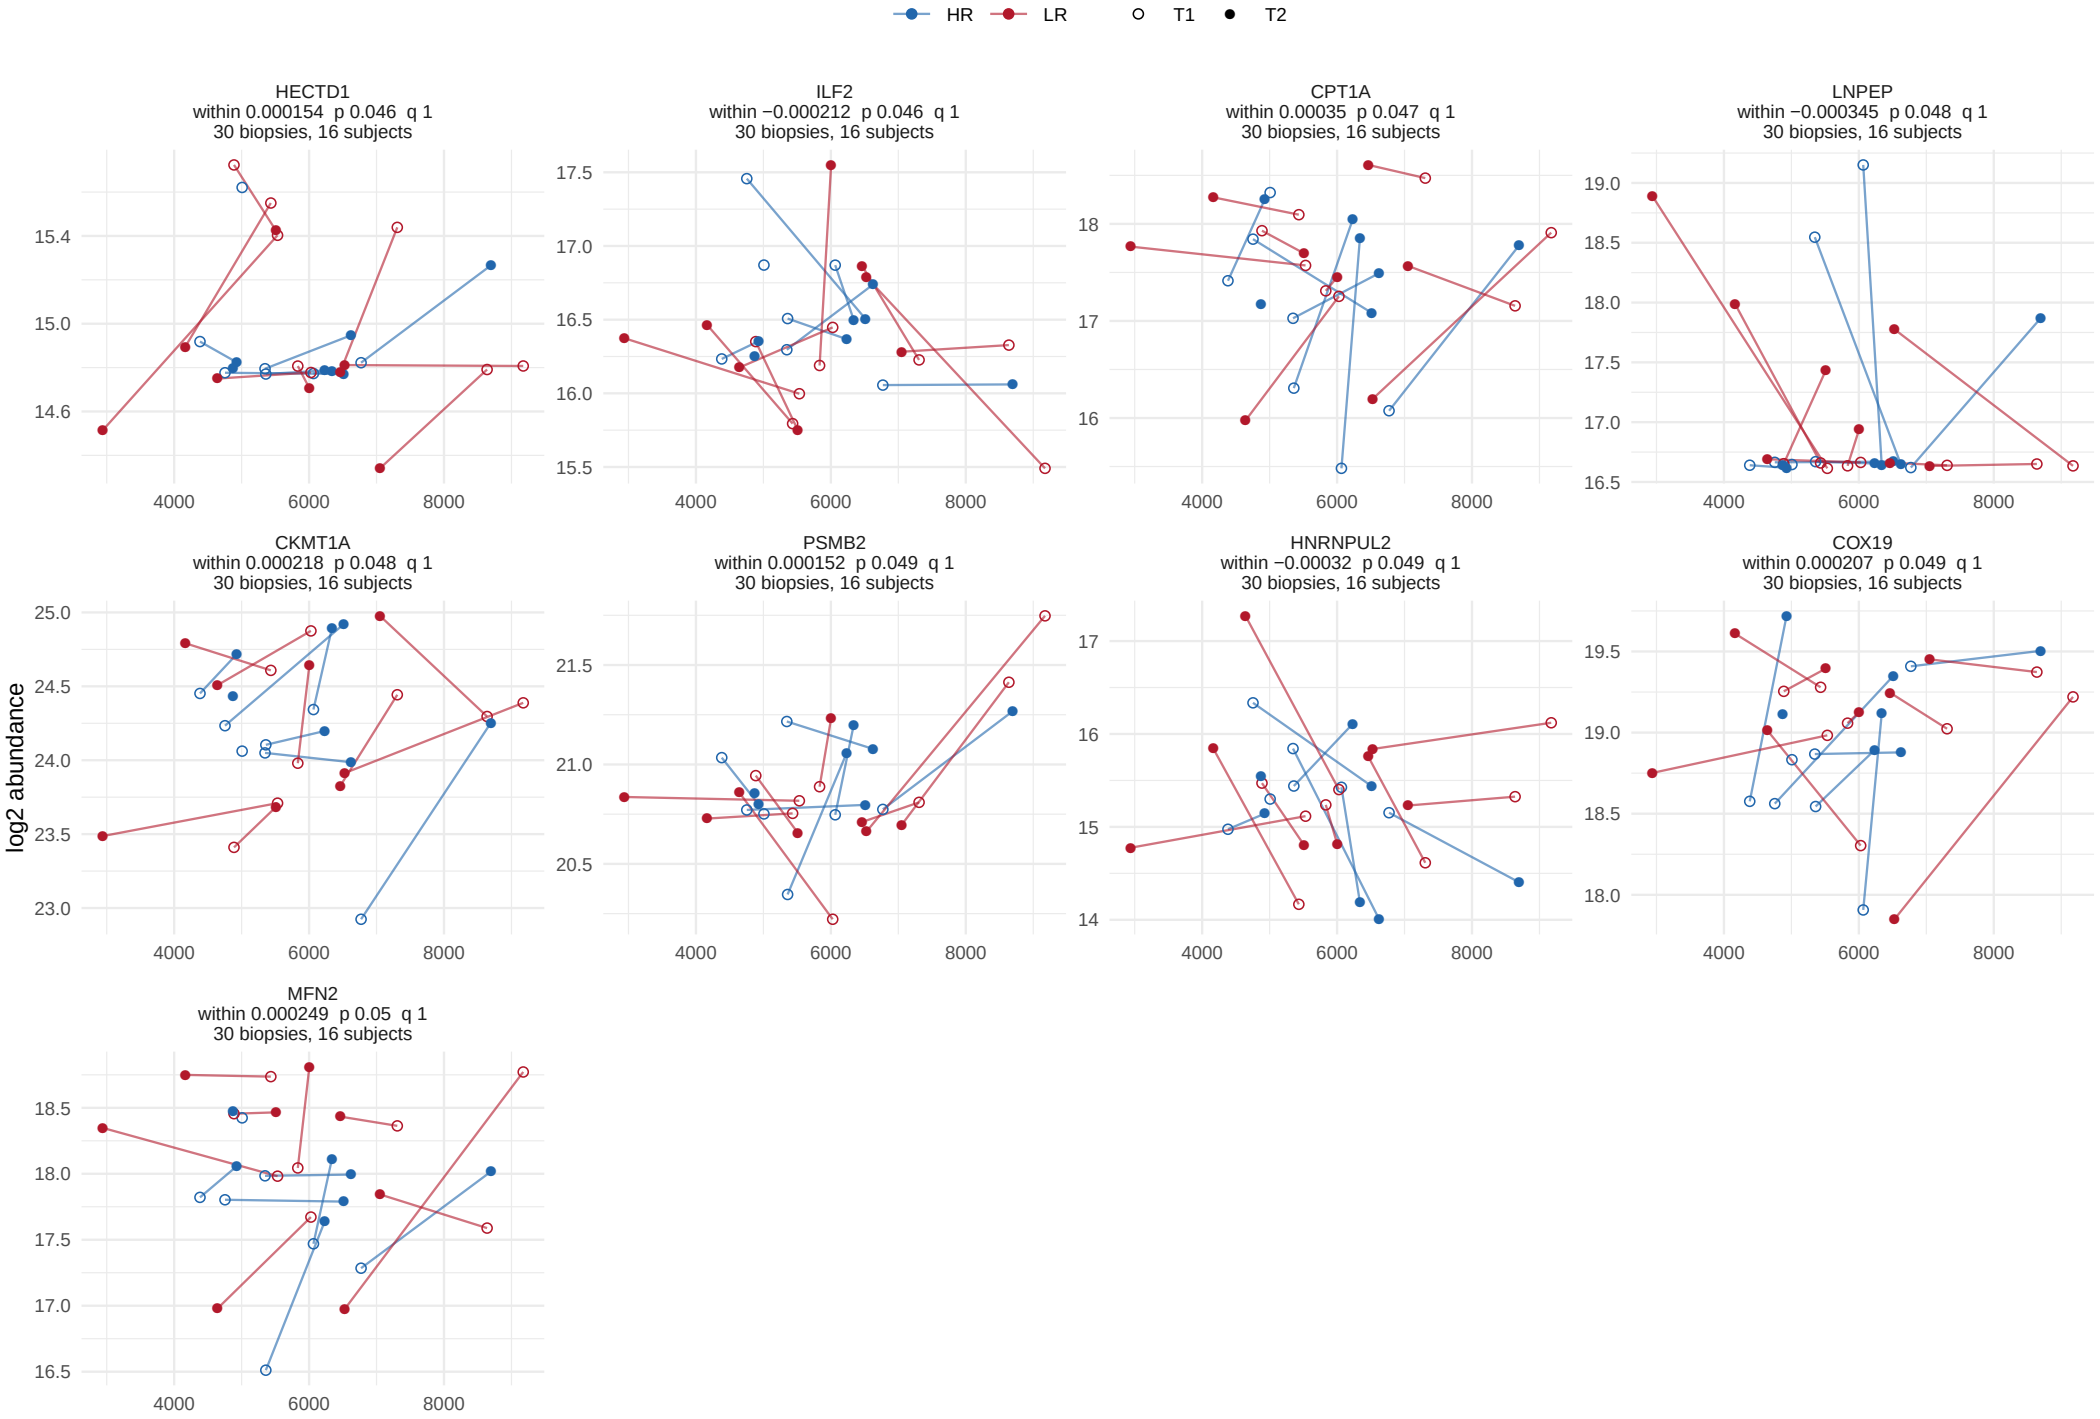

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_type1, between−person term


71 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 1 of 6.

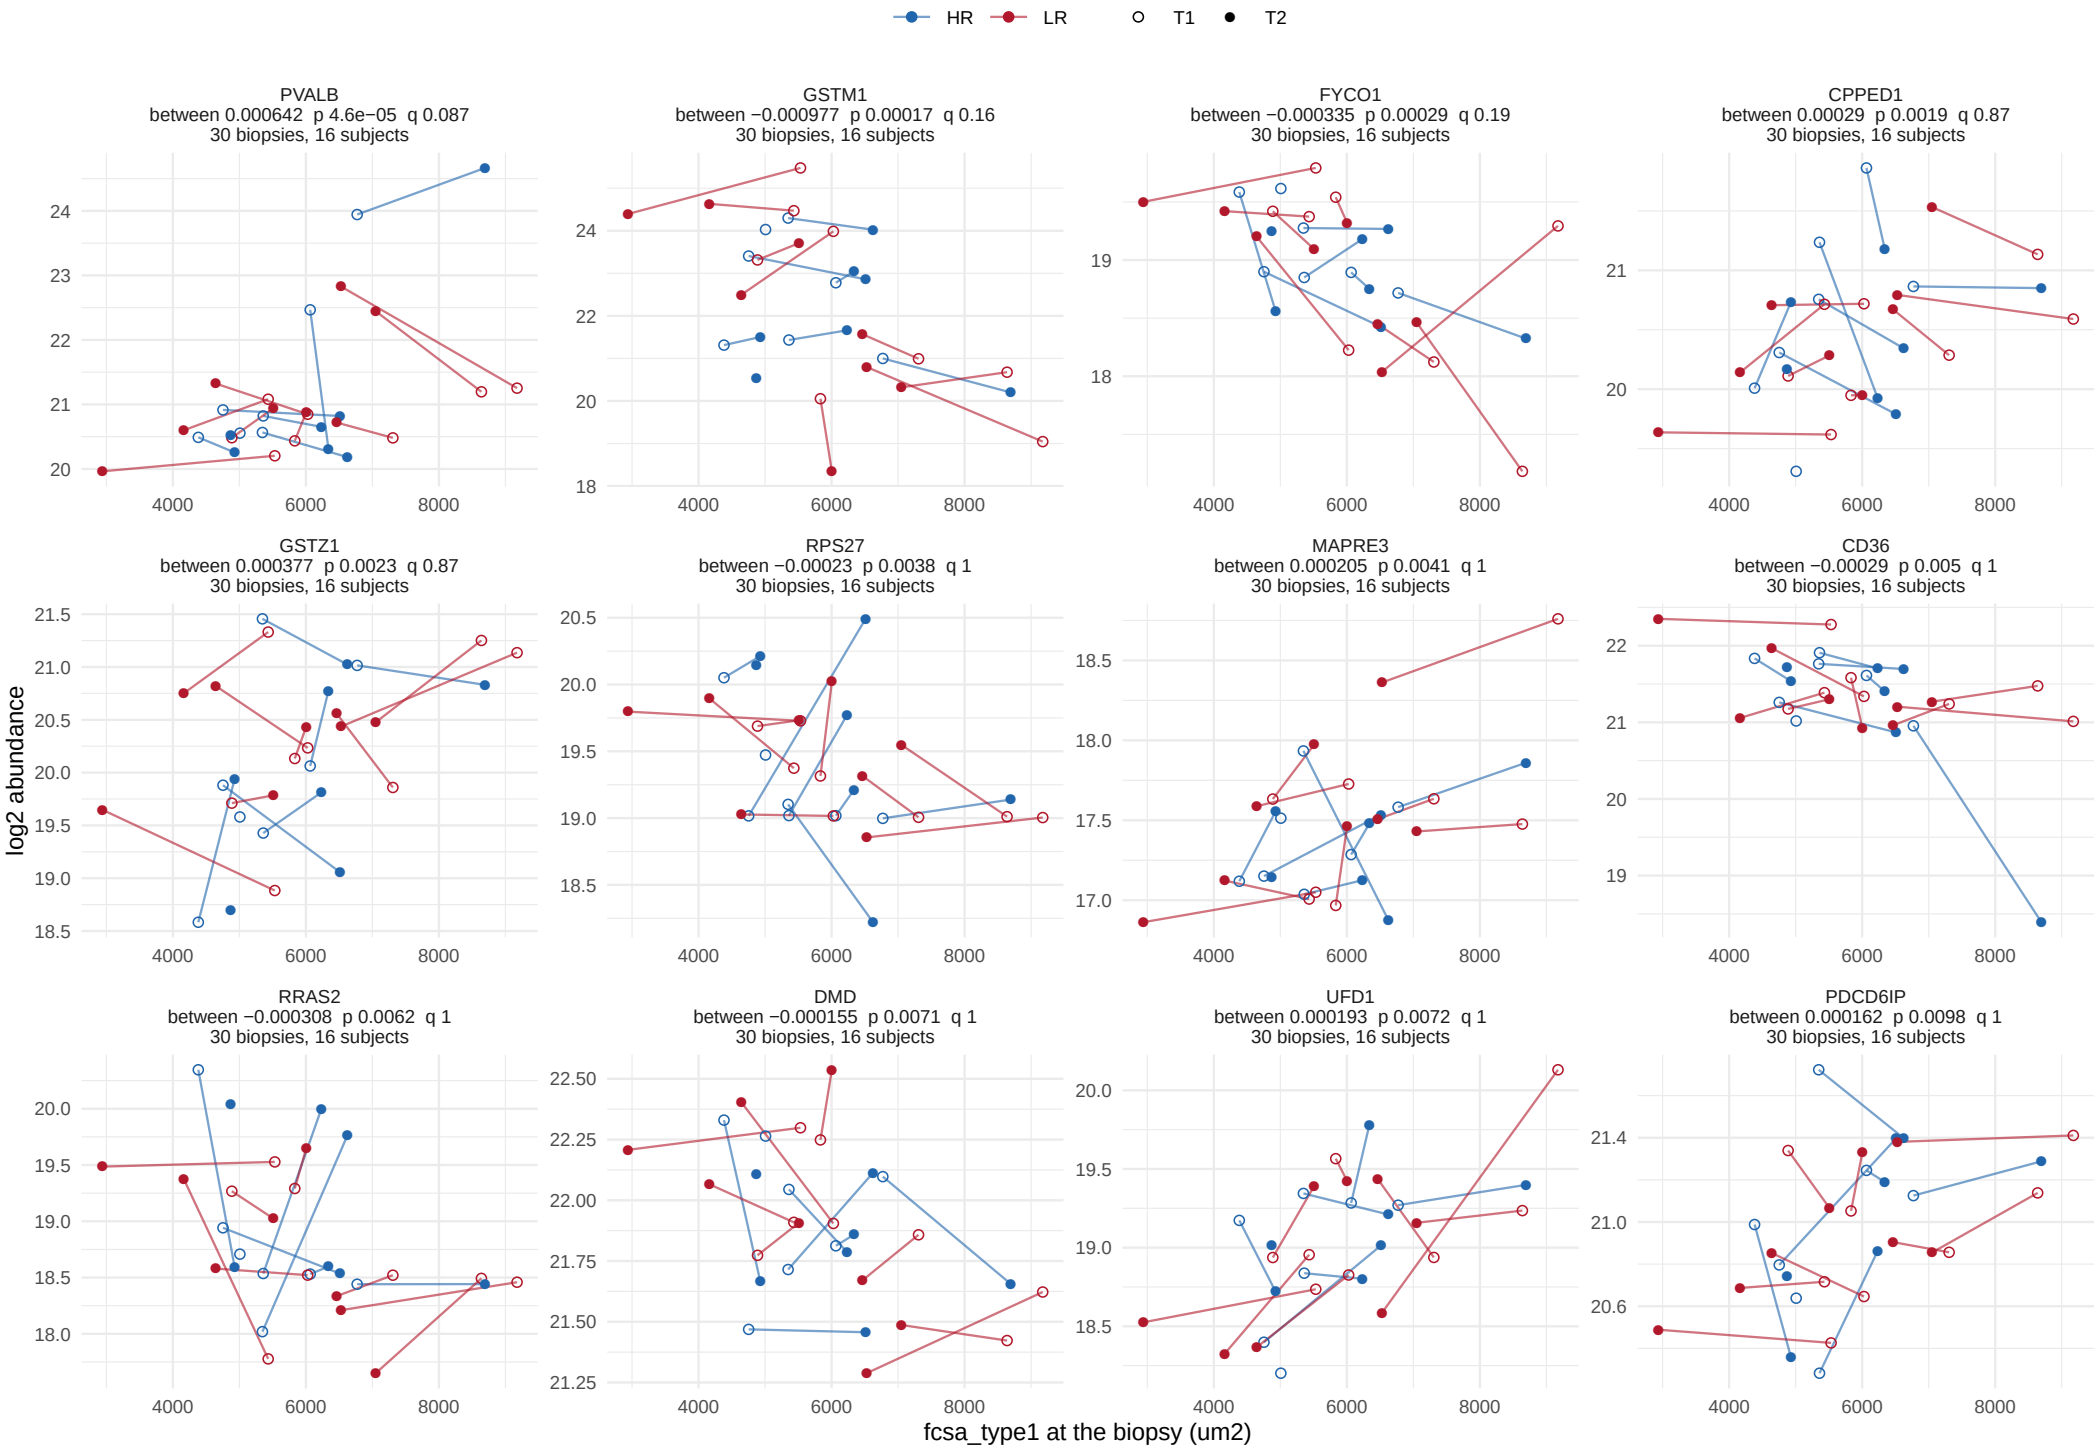

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_type1, between−person term


71 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 2 of 6.

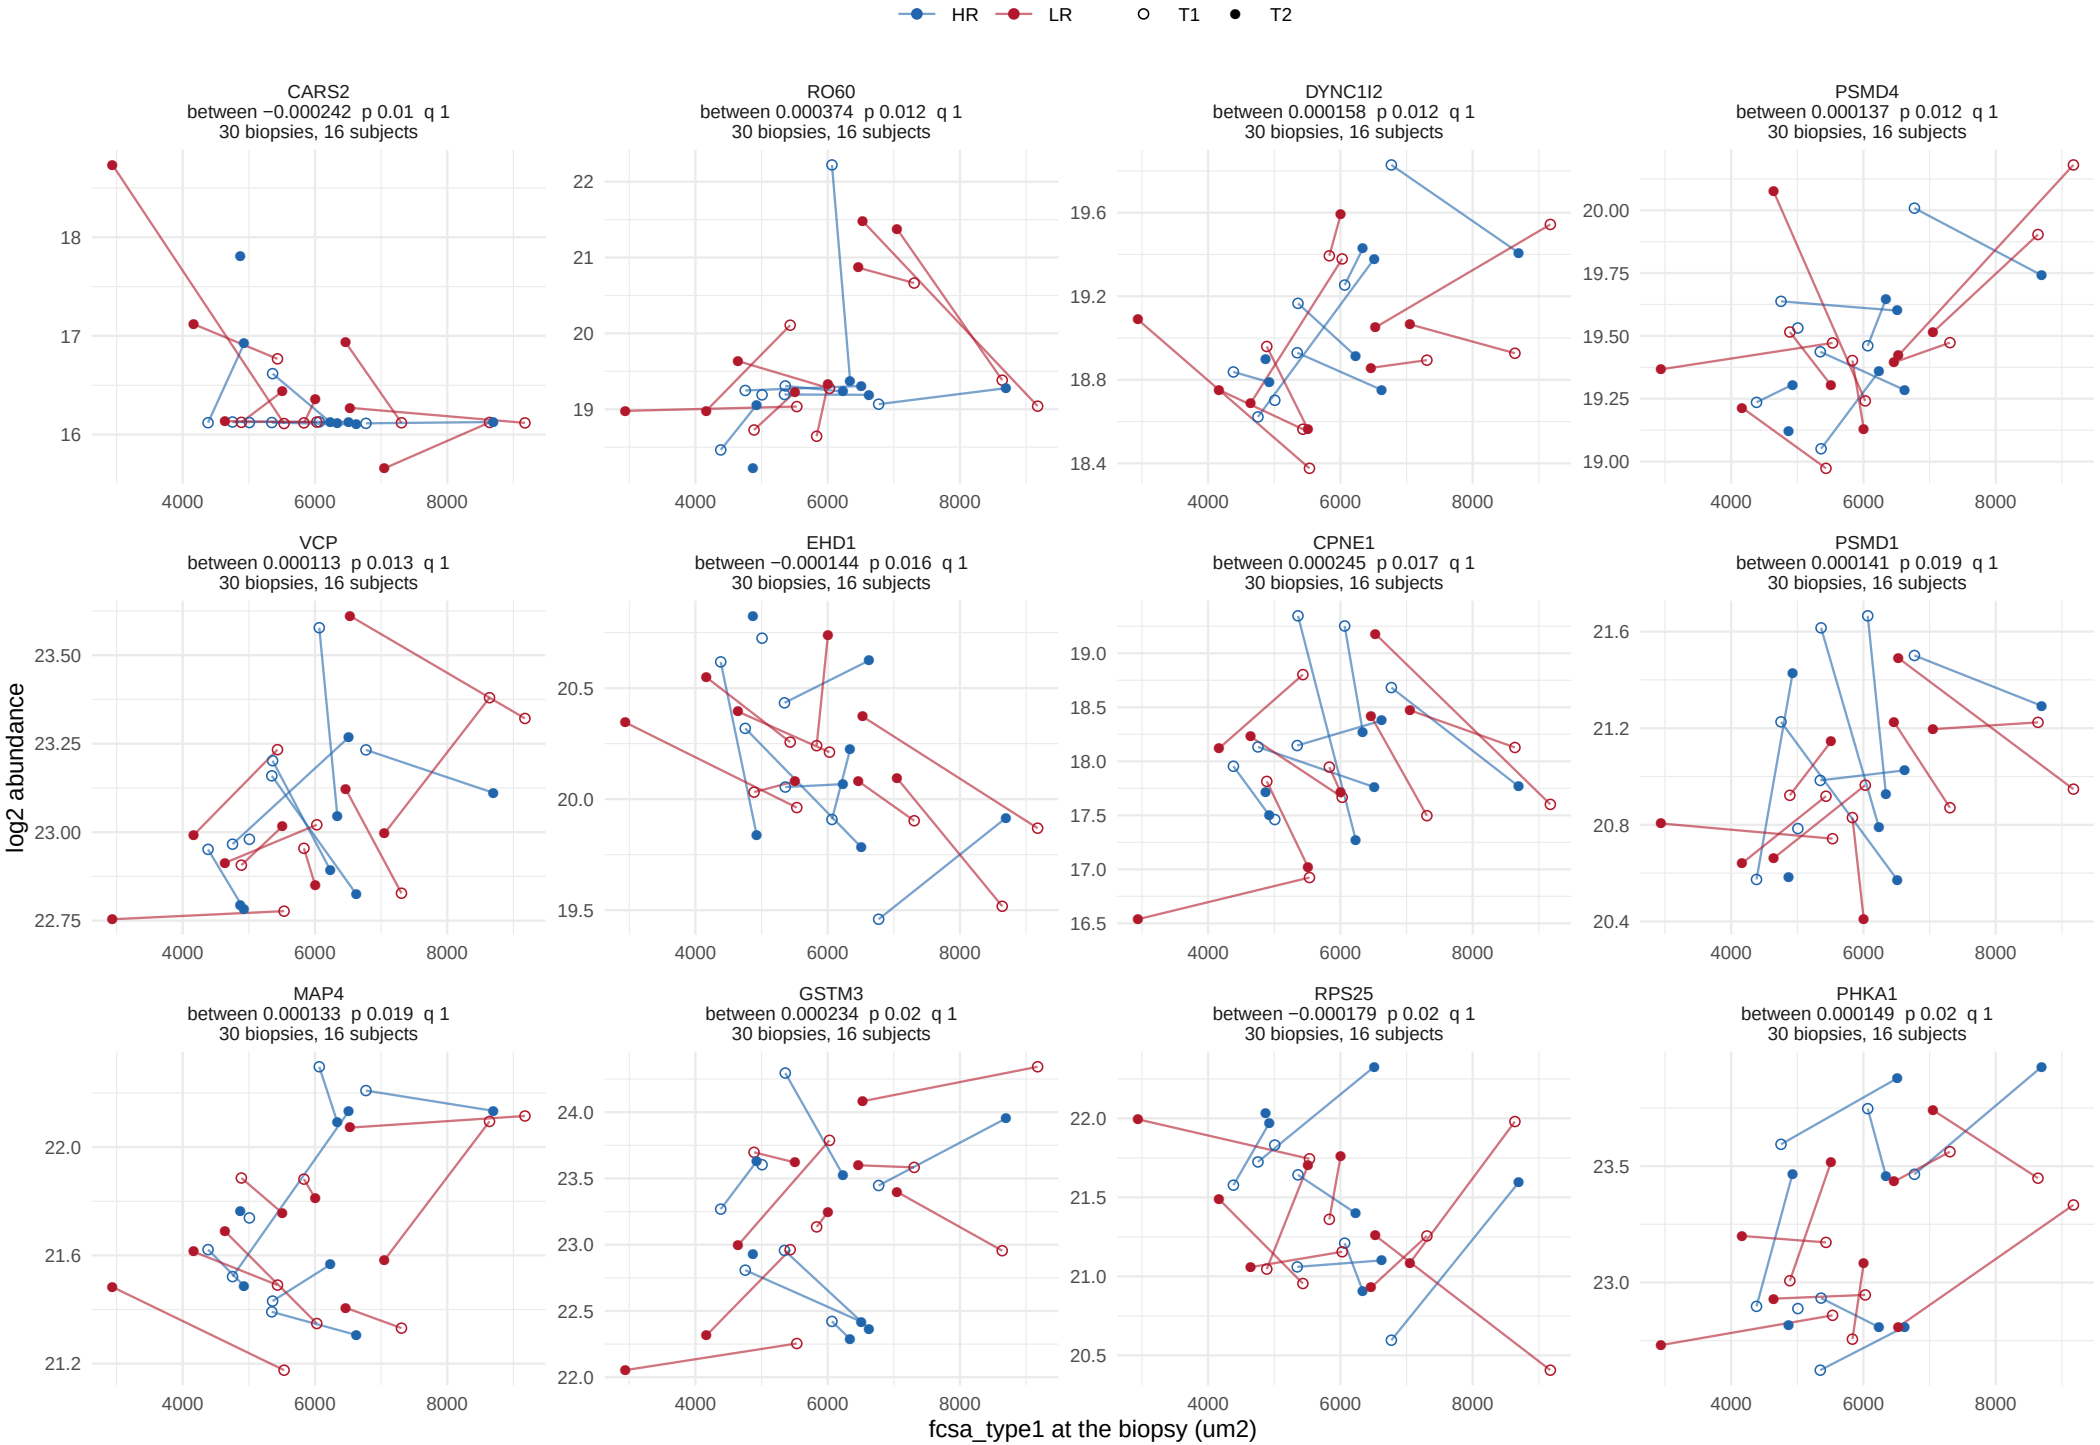

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_type1, between−person term


71 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 3 of 6.

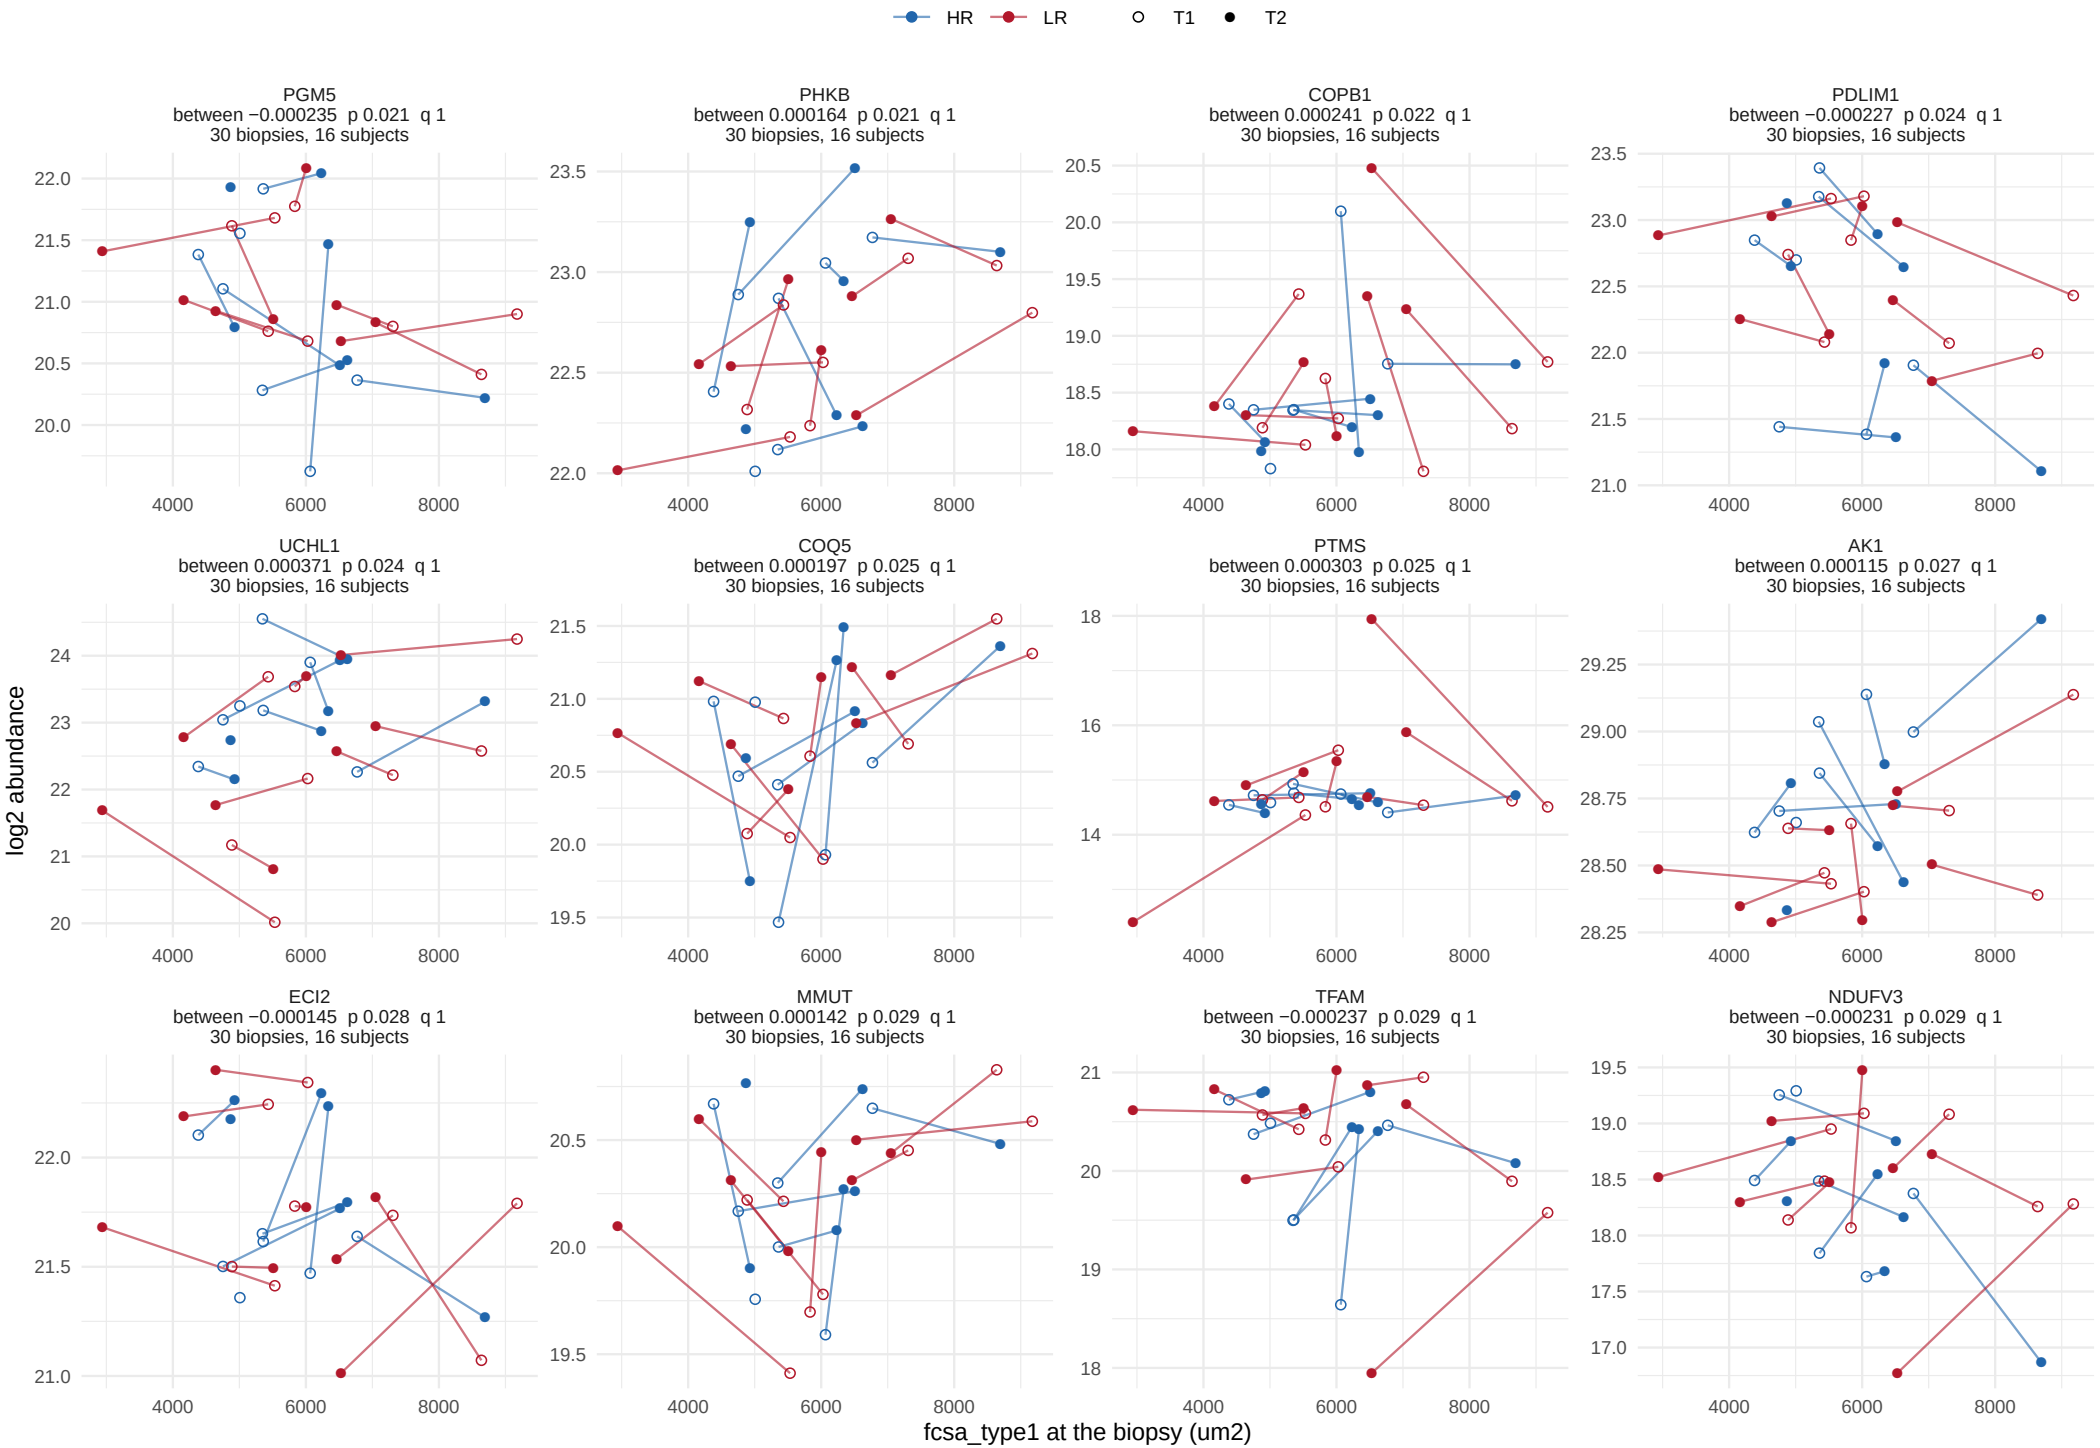

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_type1, between−person term


71 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 4 of 6.

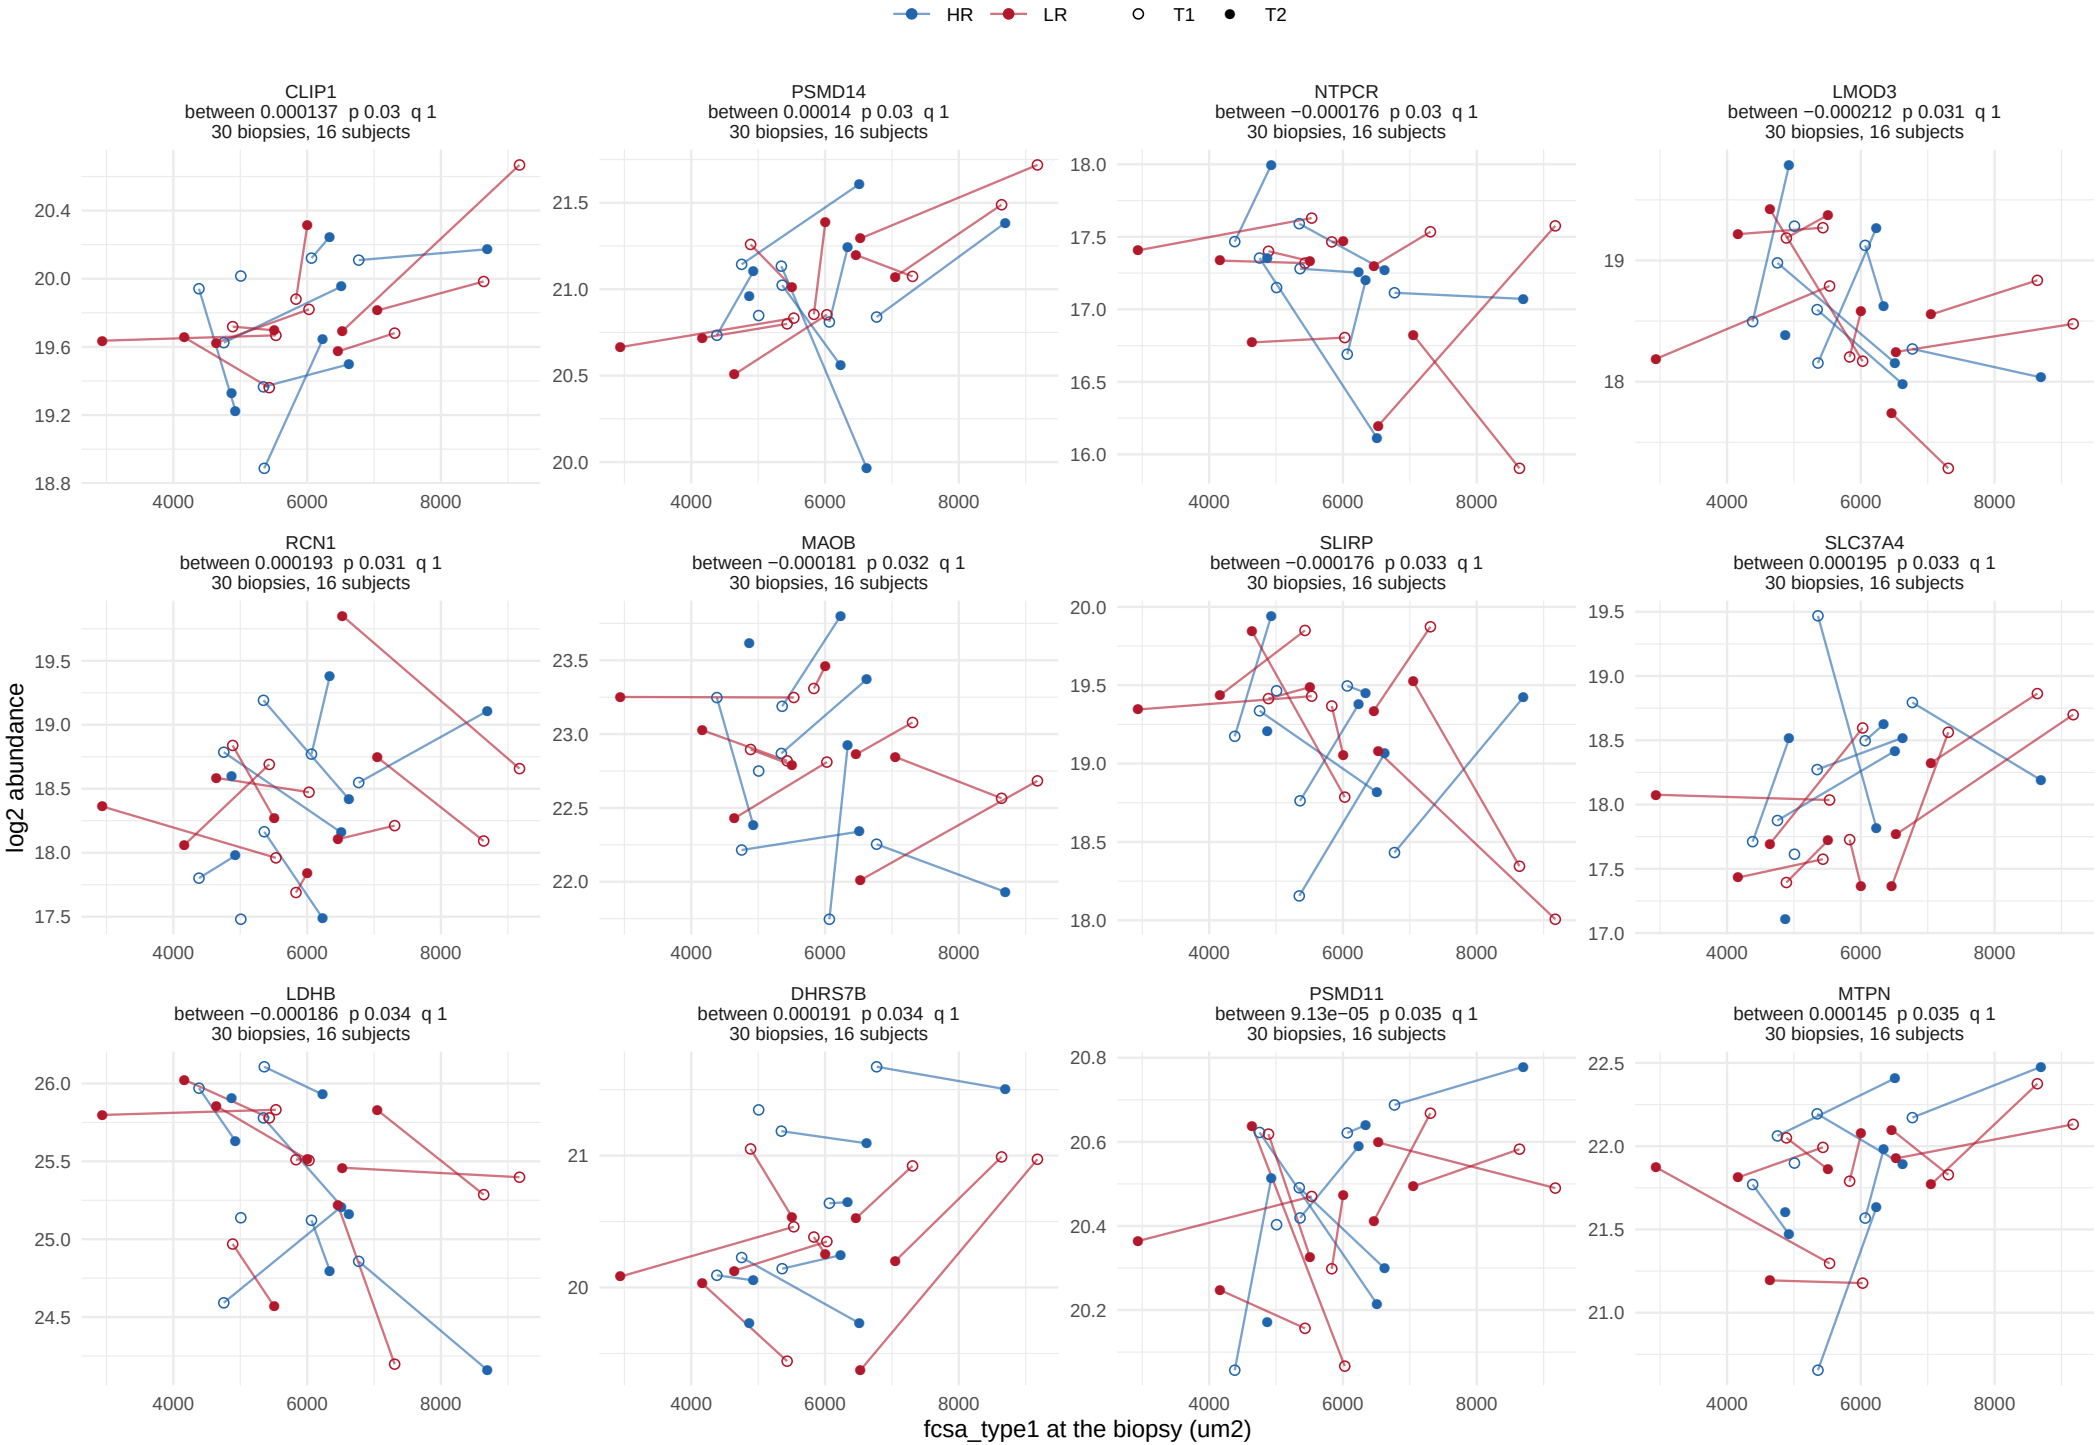

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_type1, between−person term


71 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 5 of 6.

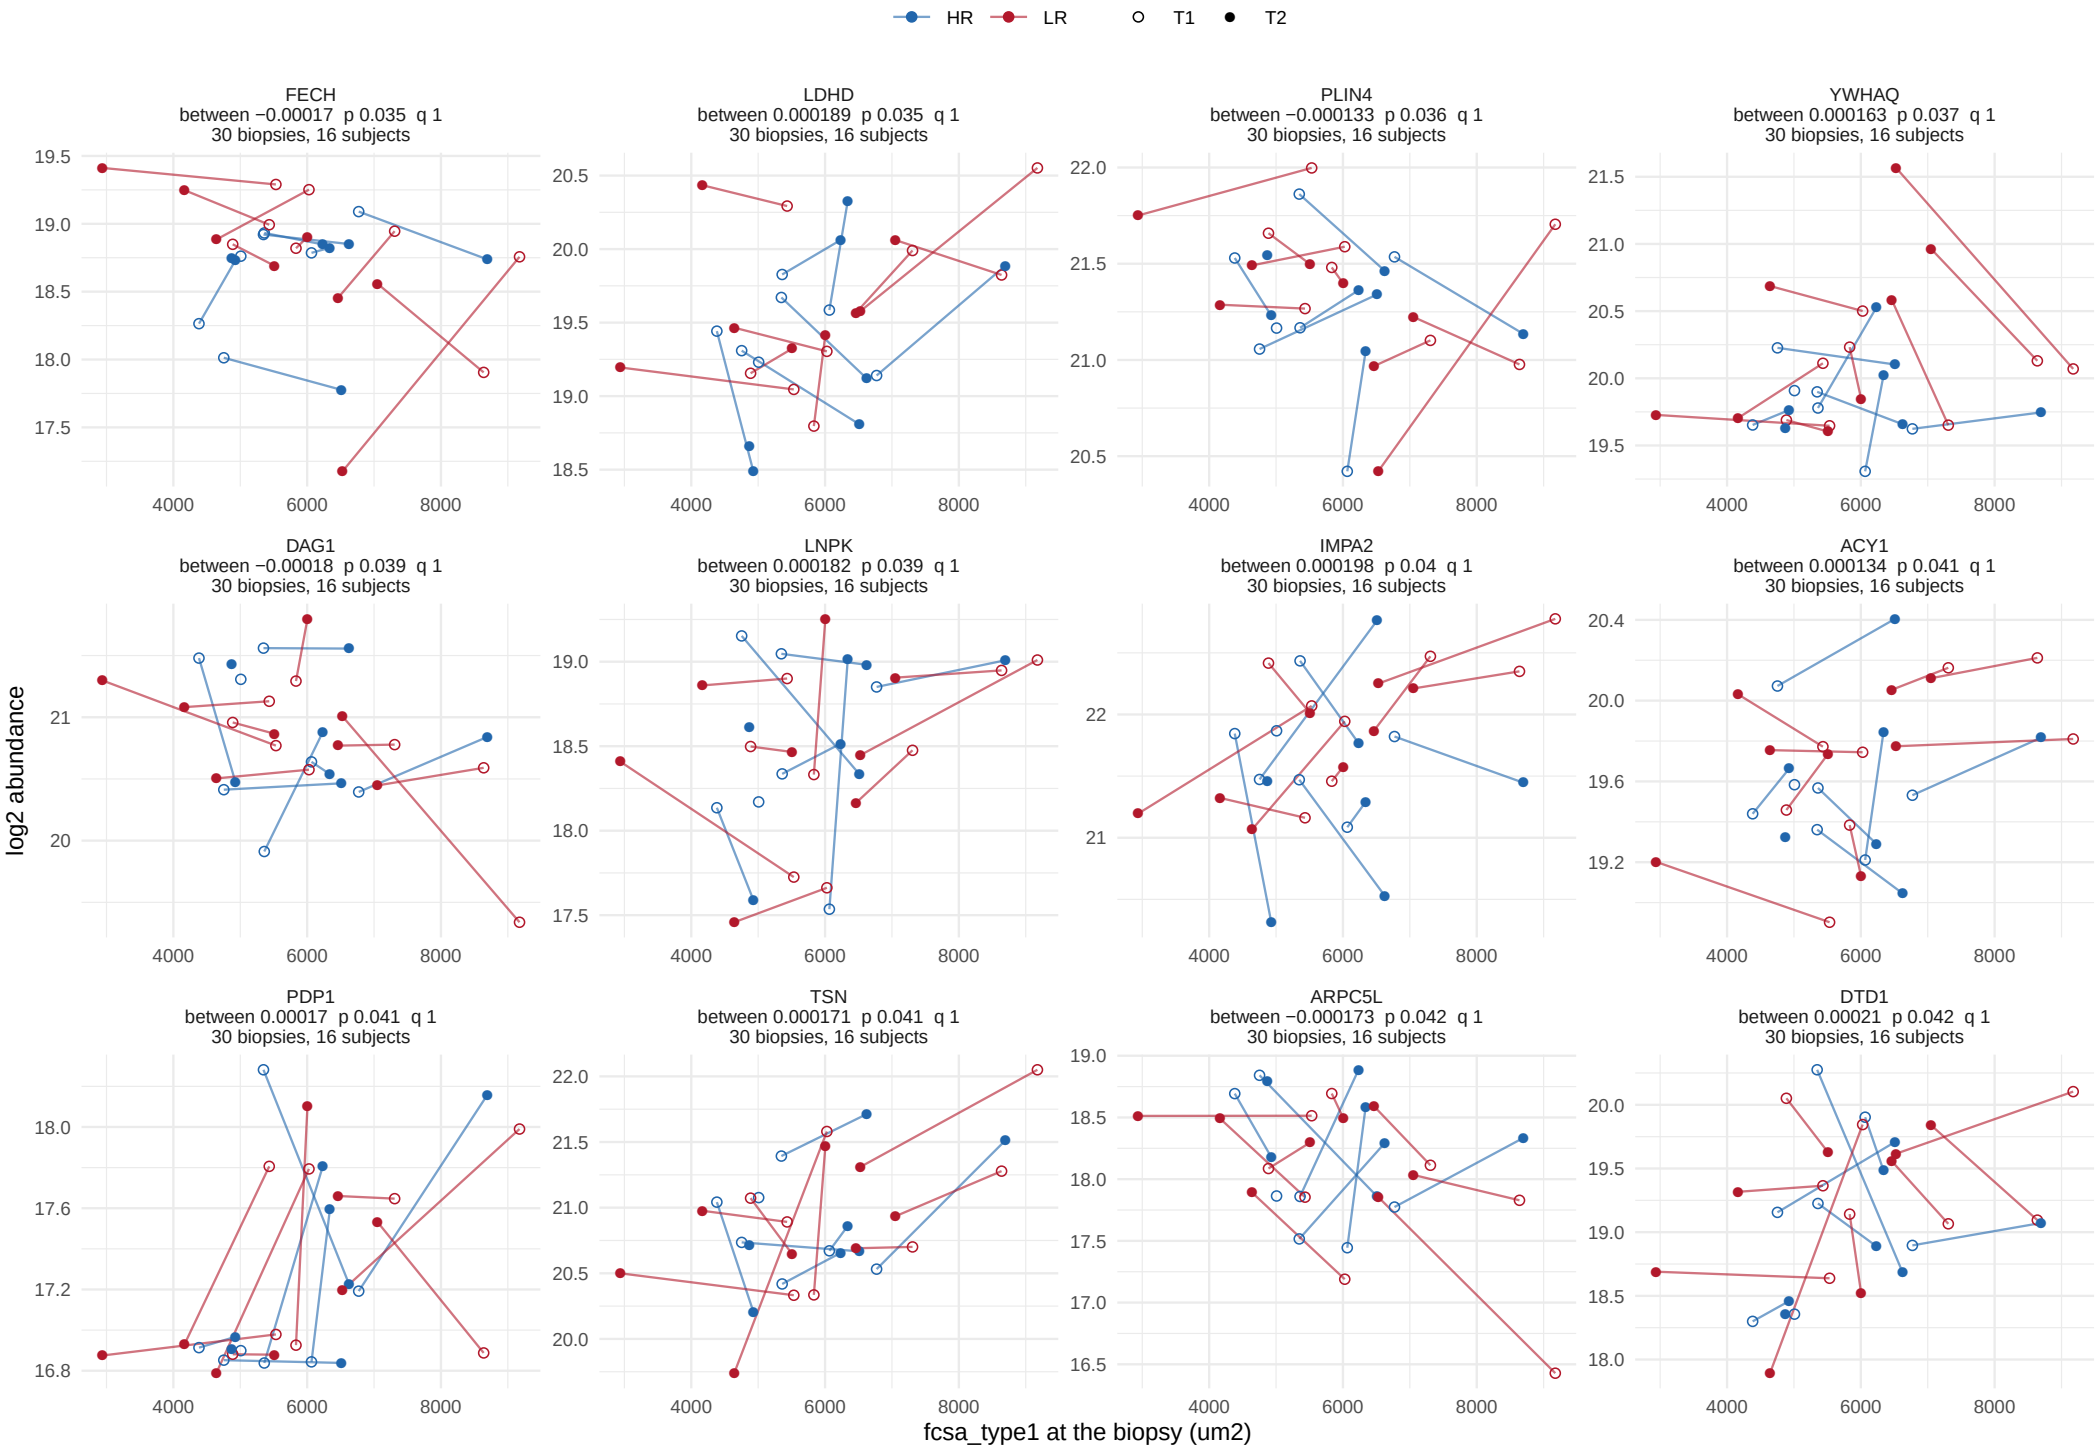

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_type1, between−person term


71 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 6 of 6.

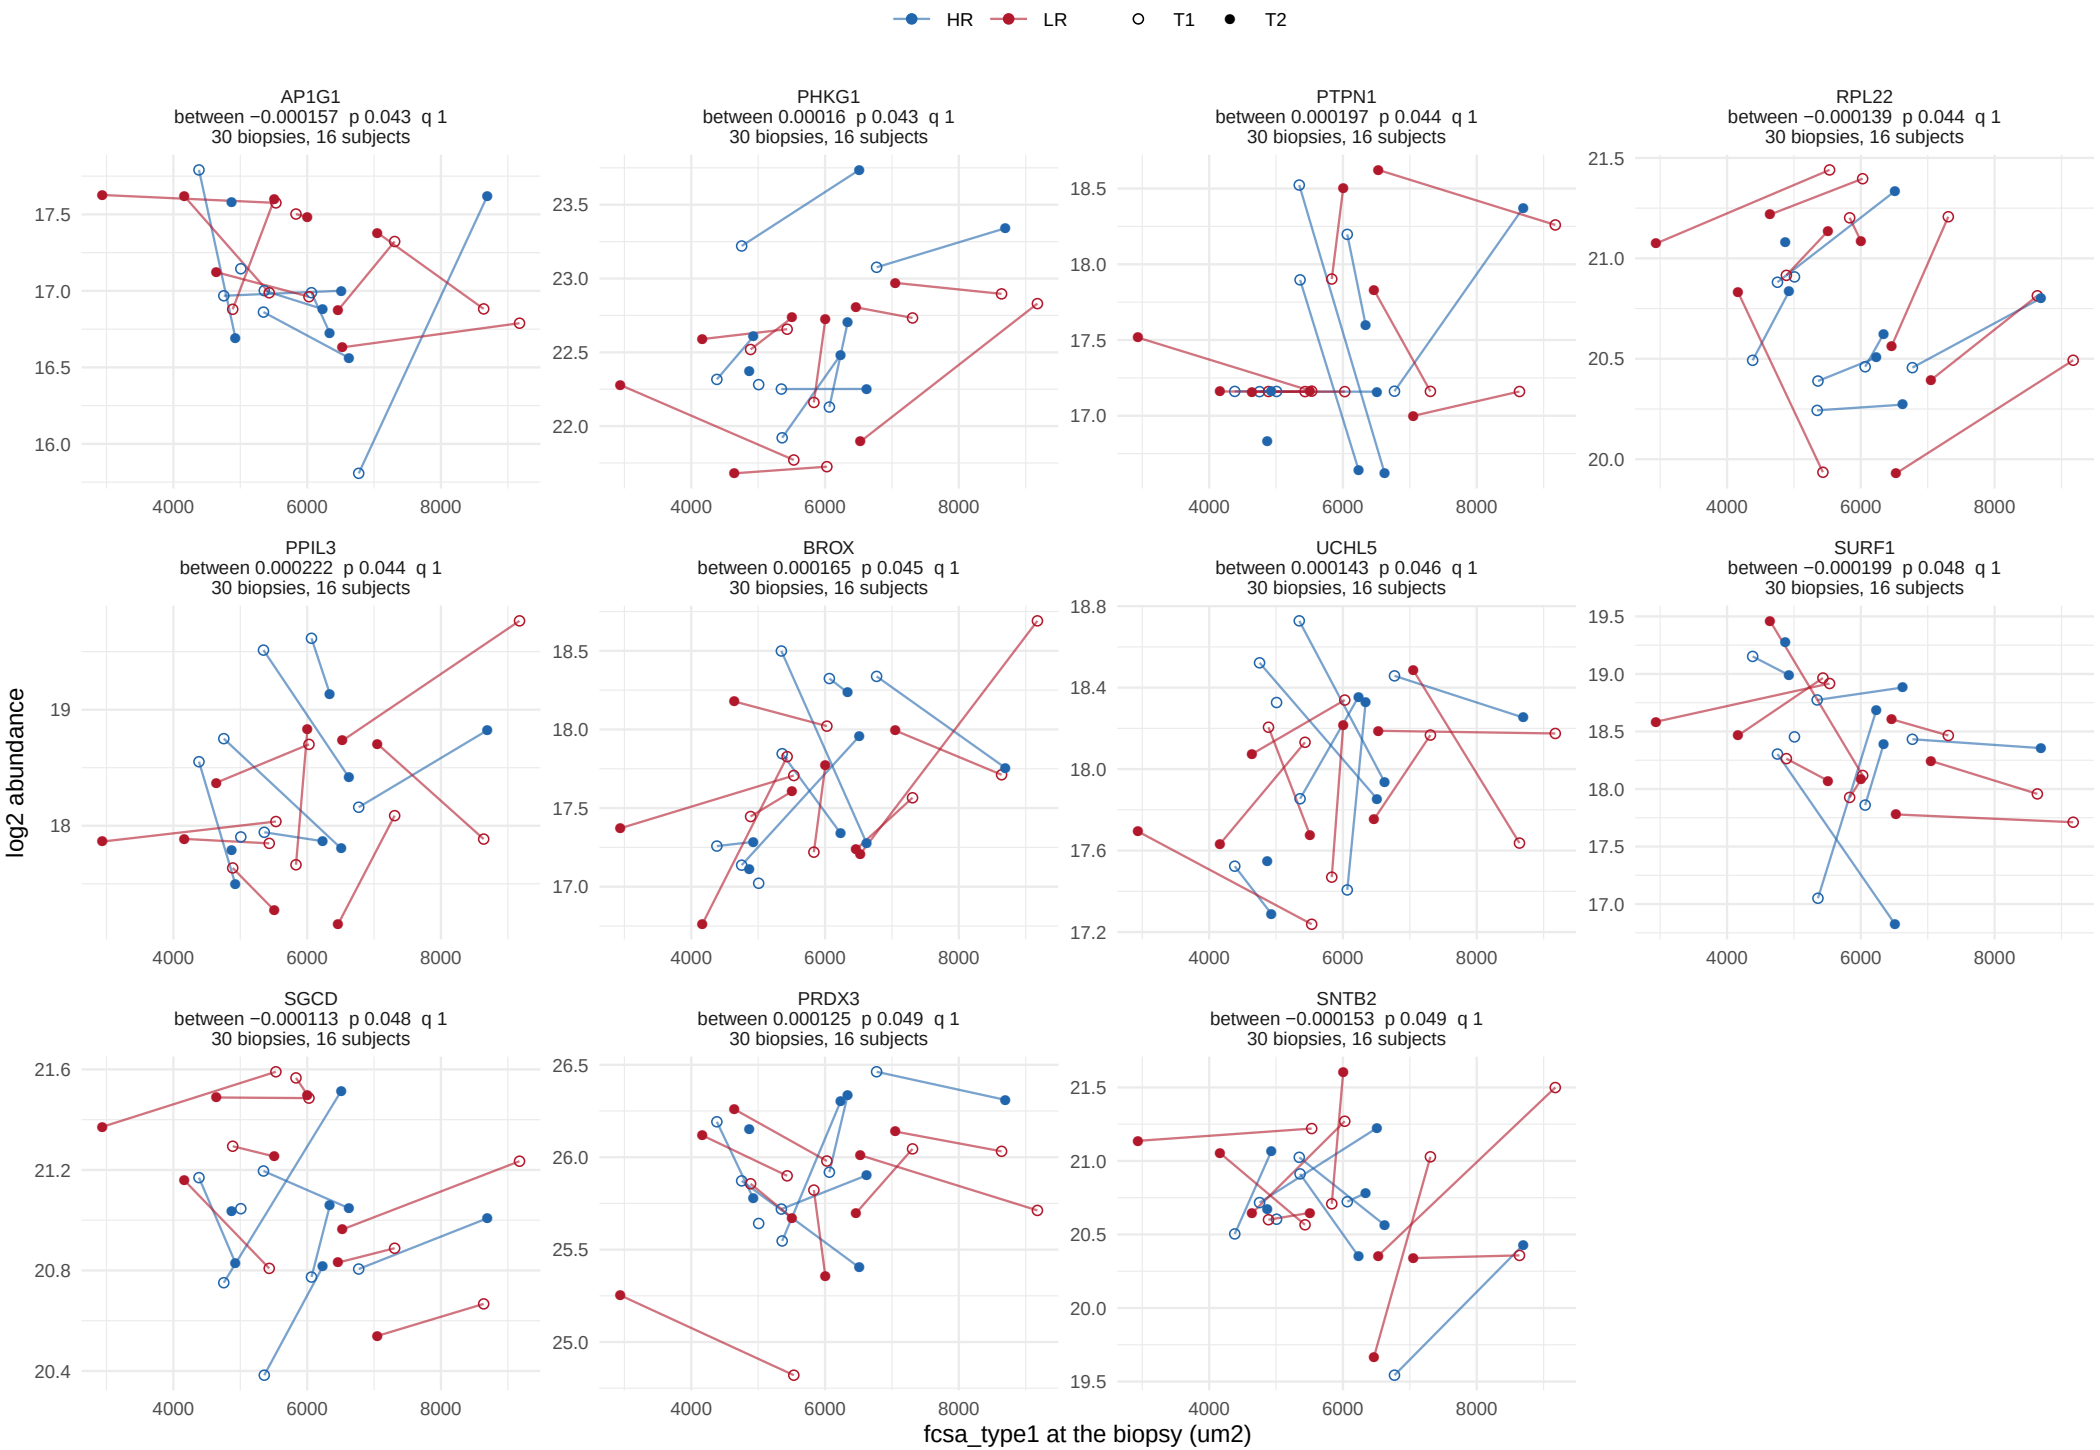

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_type2, within−person term


74 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 1 of 7.

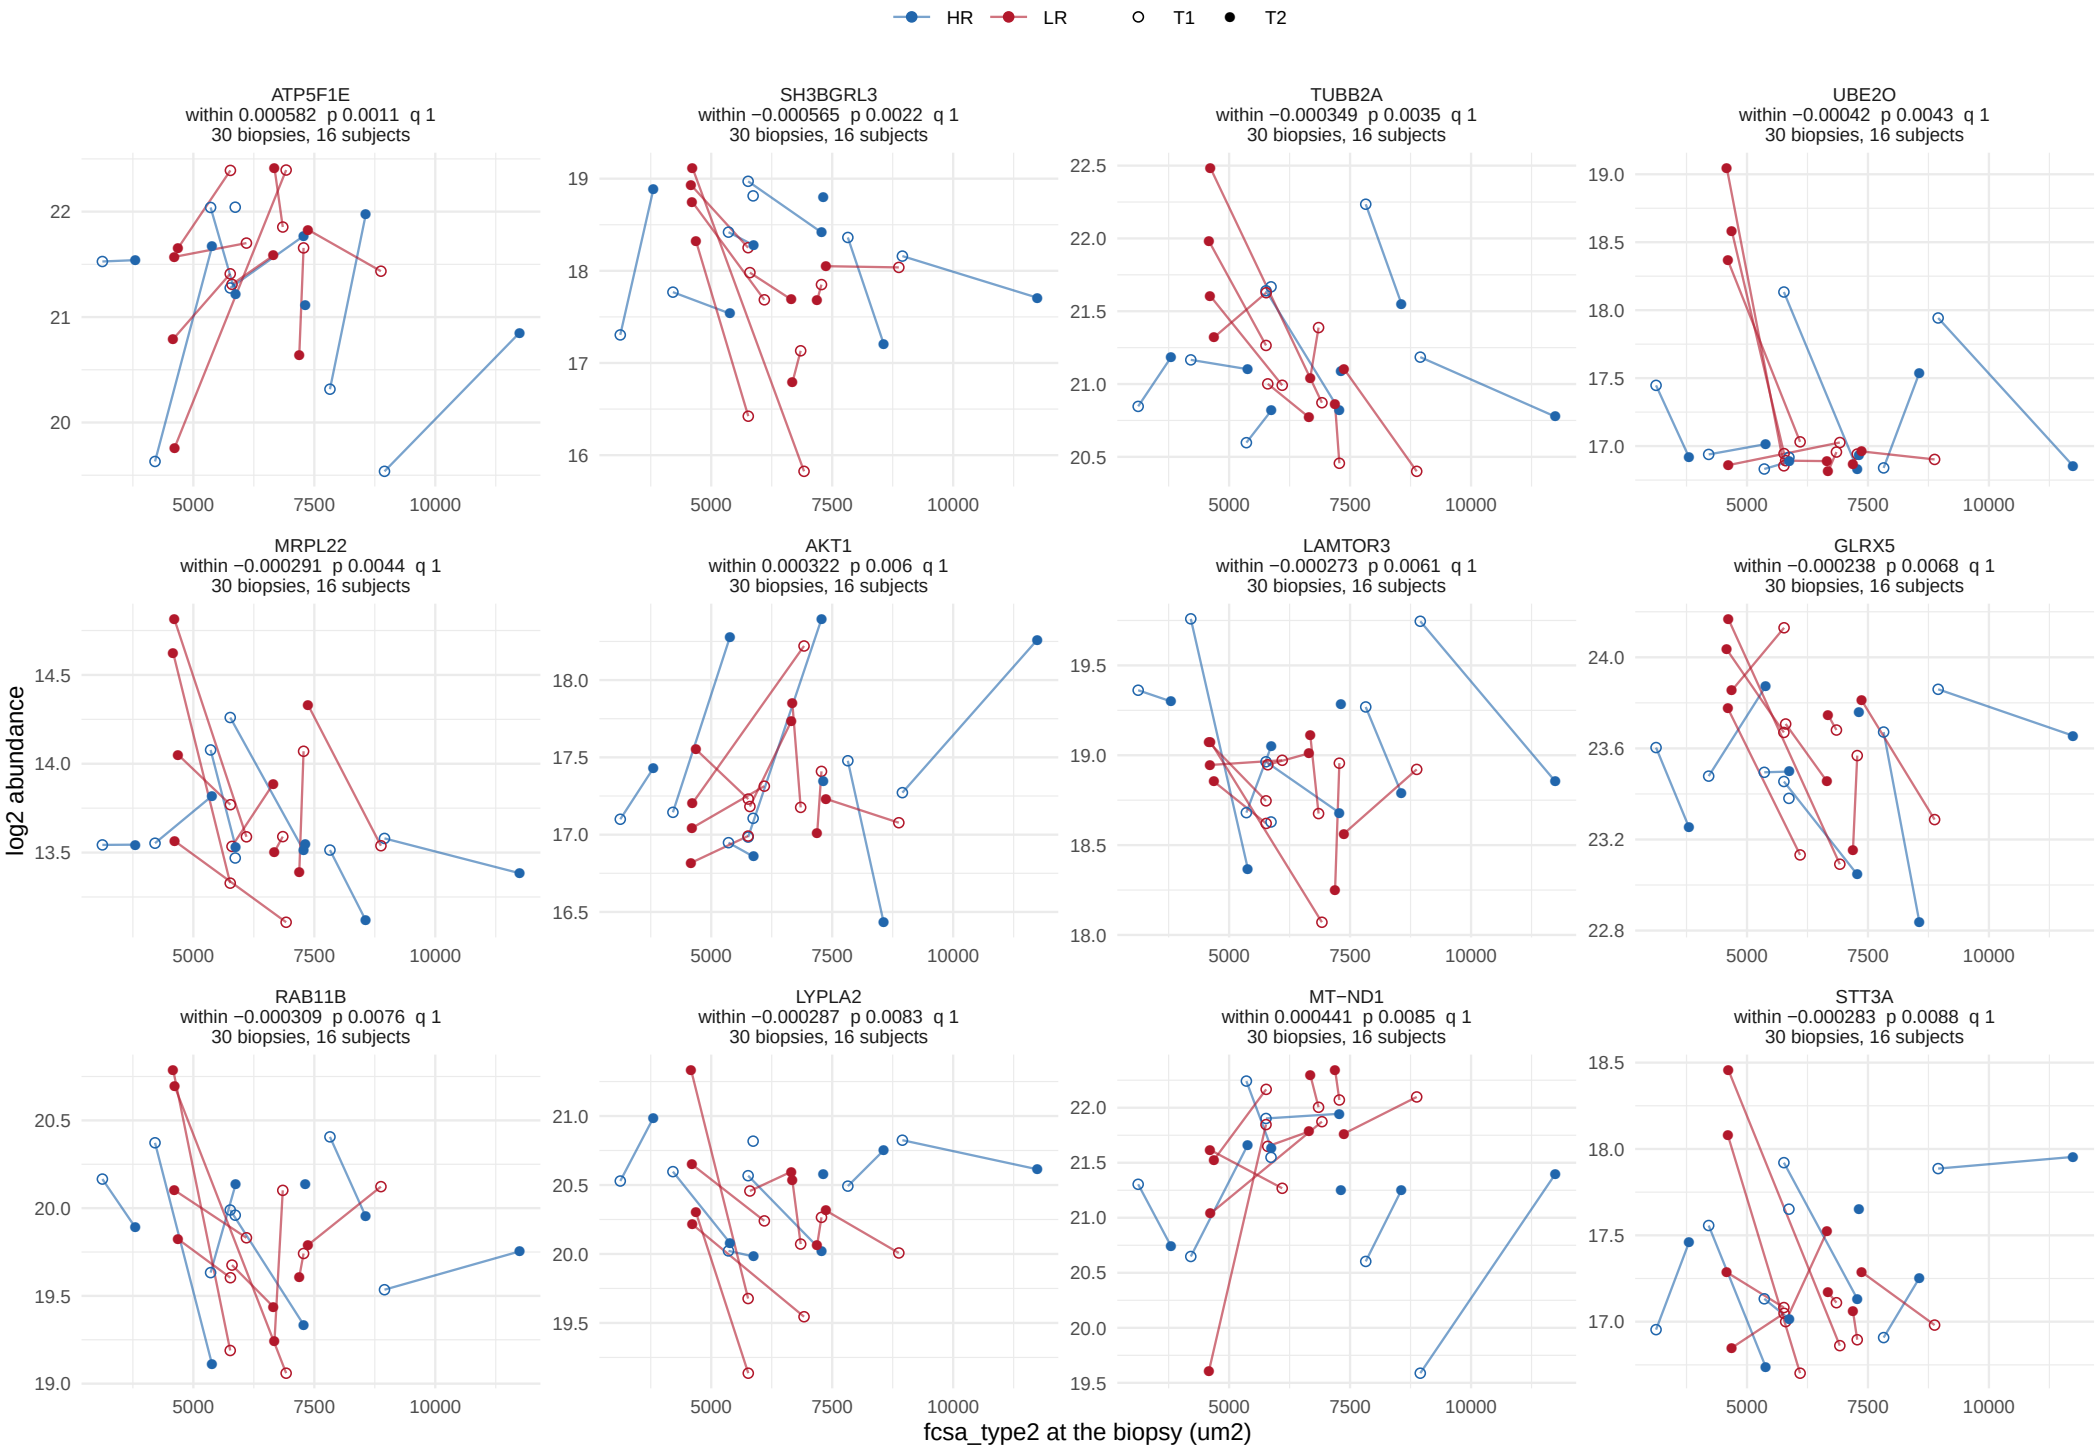

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_type2, within−person term


74 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 2 of 7.

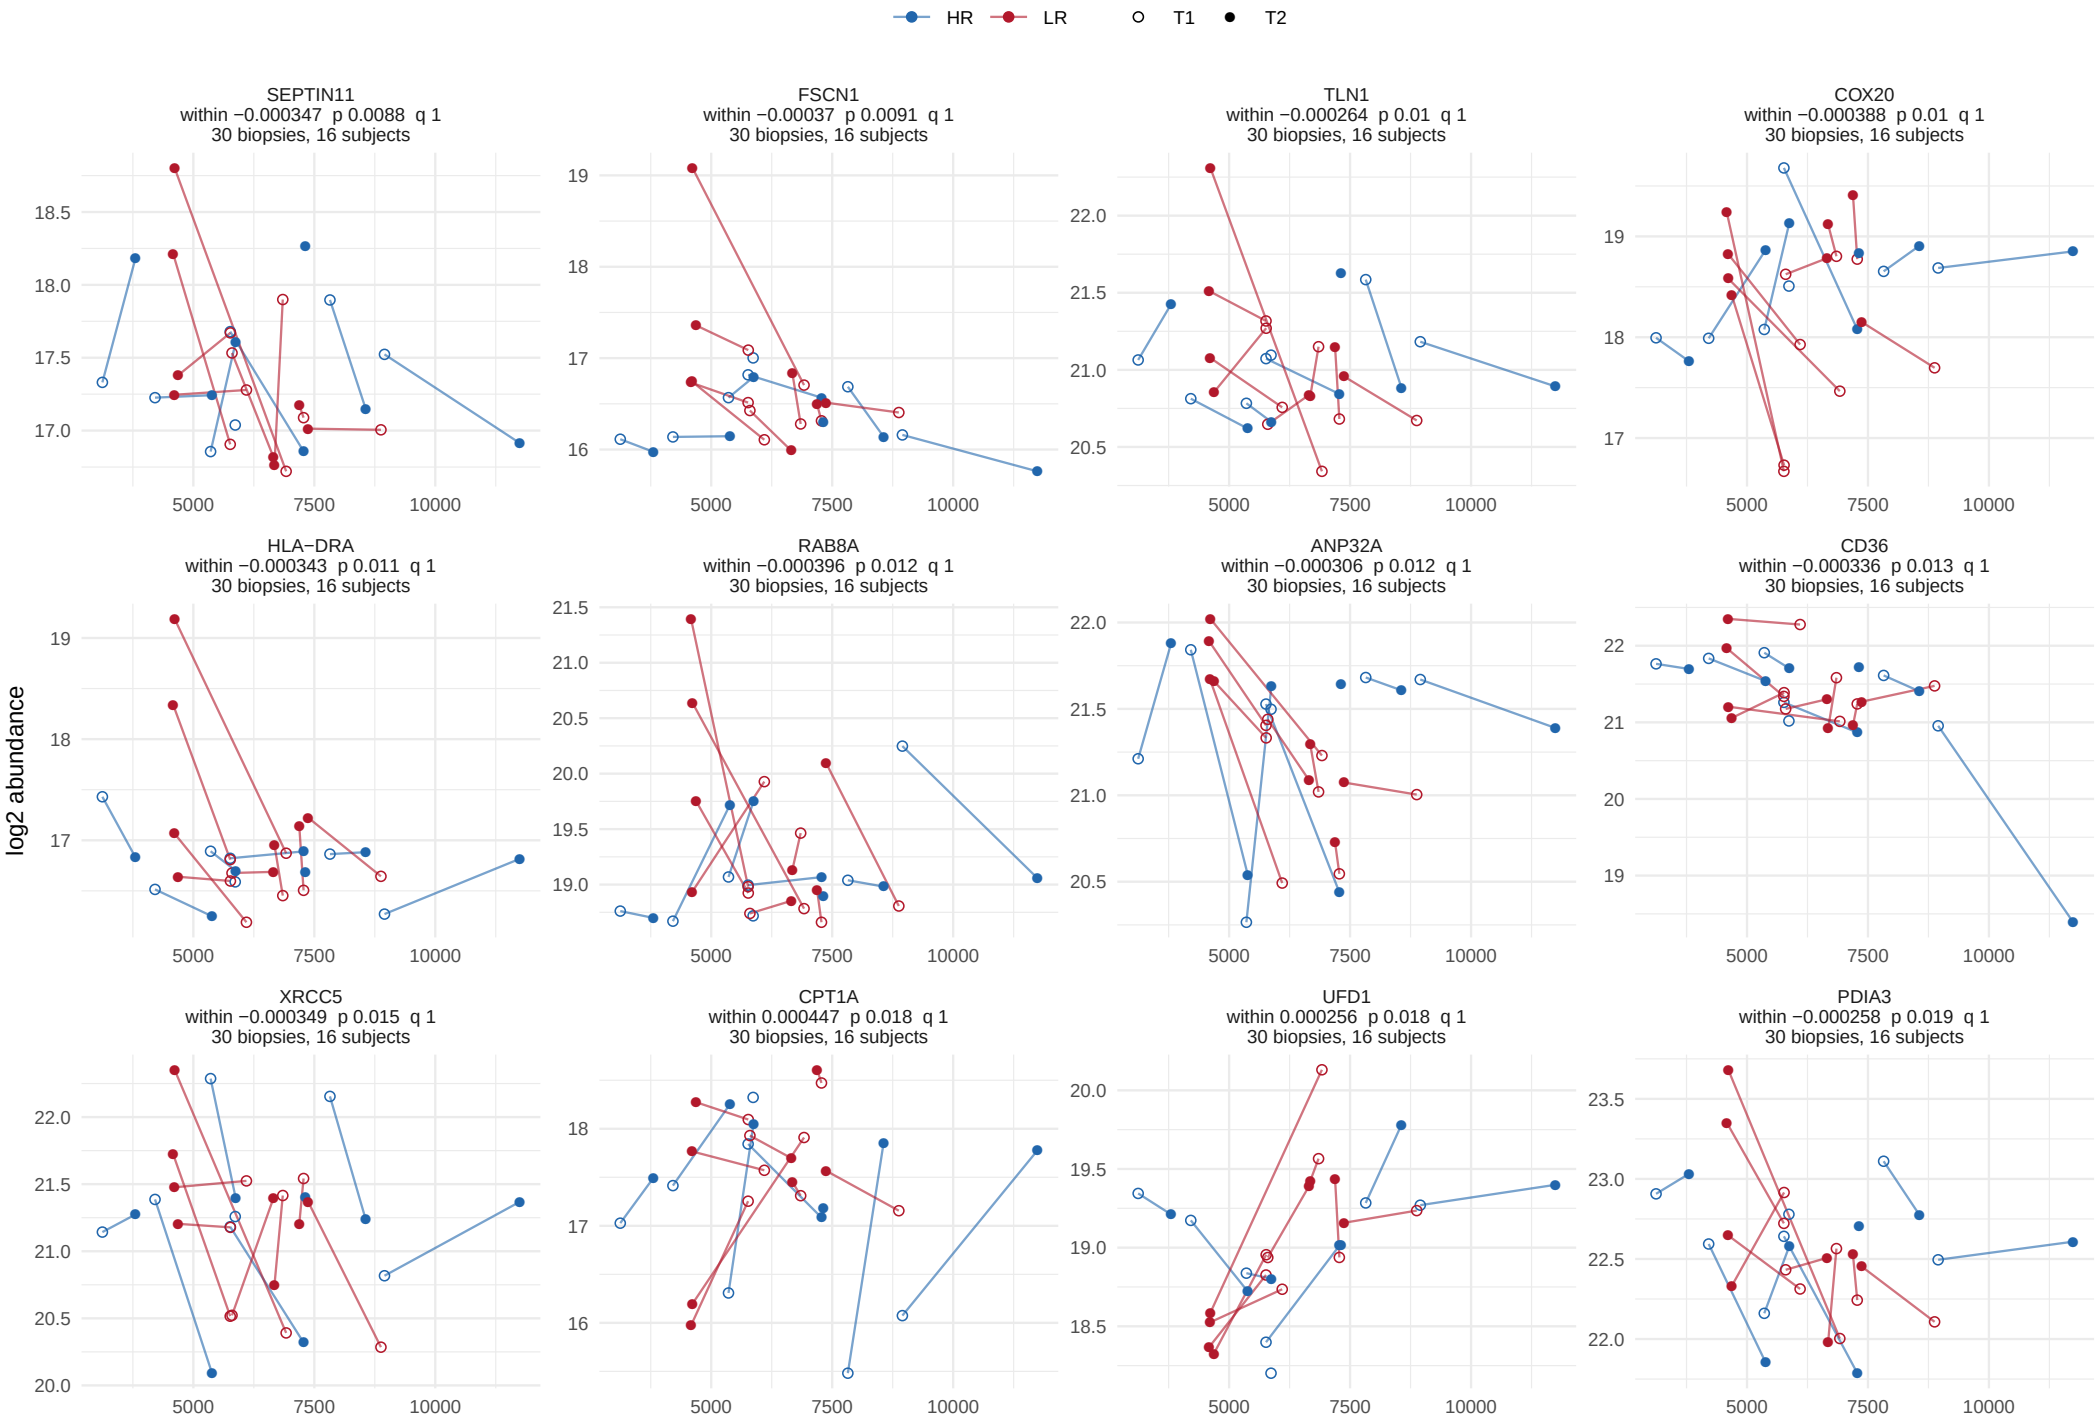

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_type2, within−person term


74 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 3 of 7.

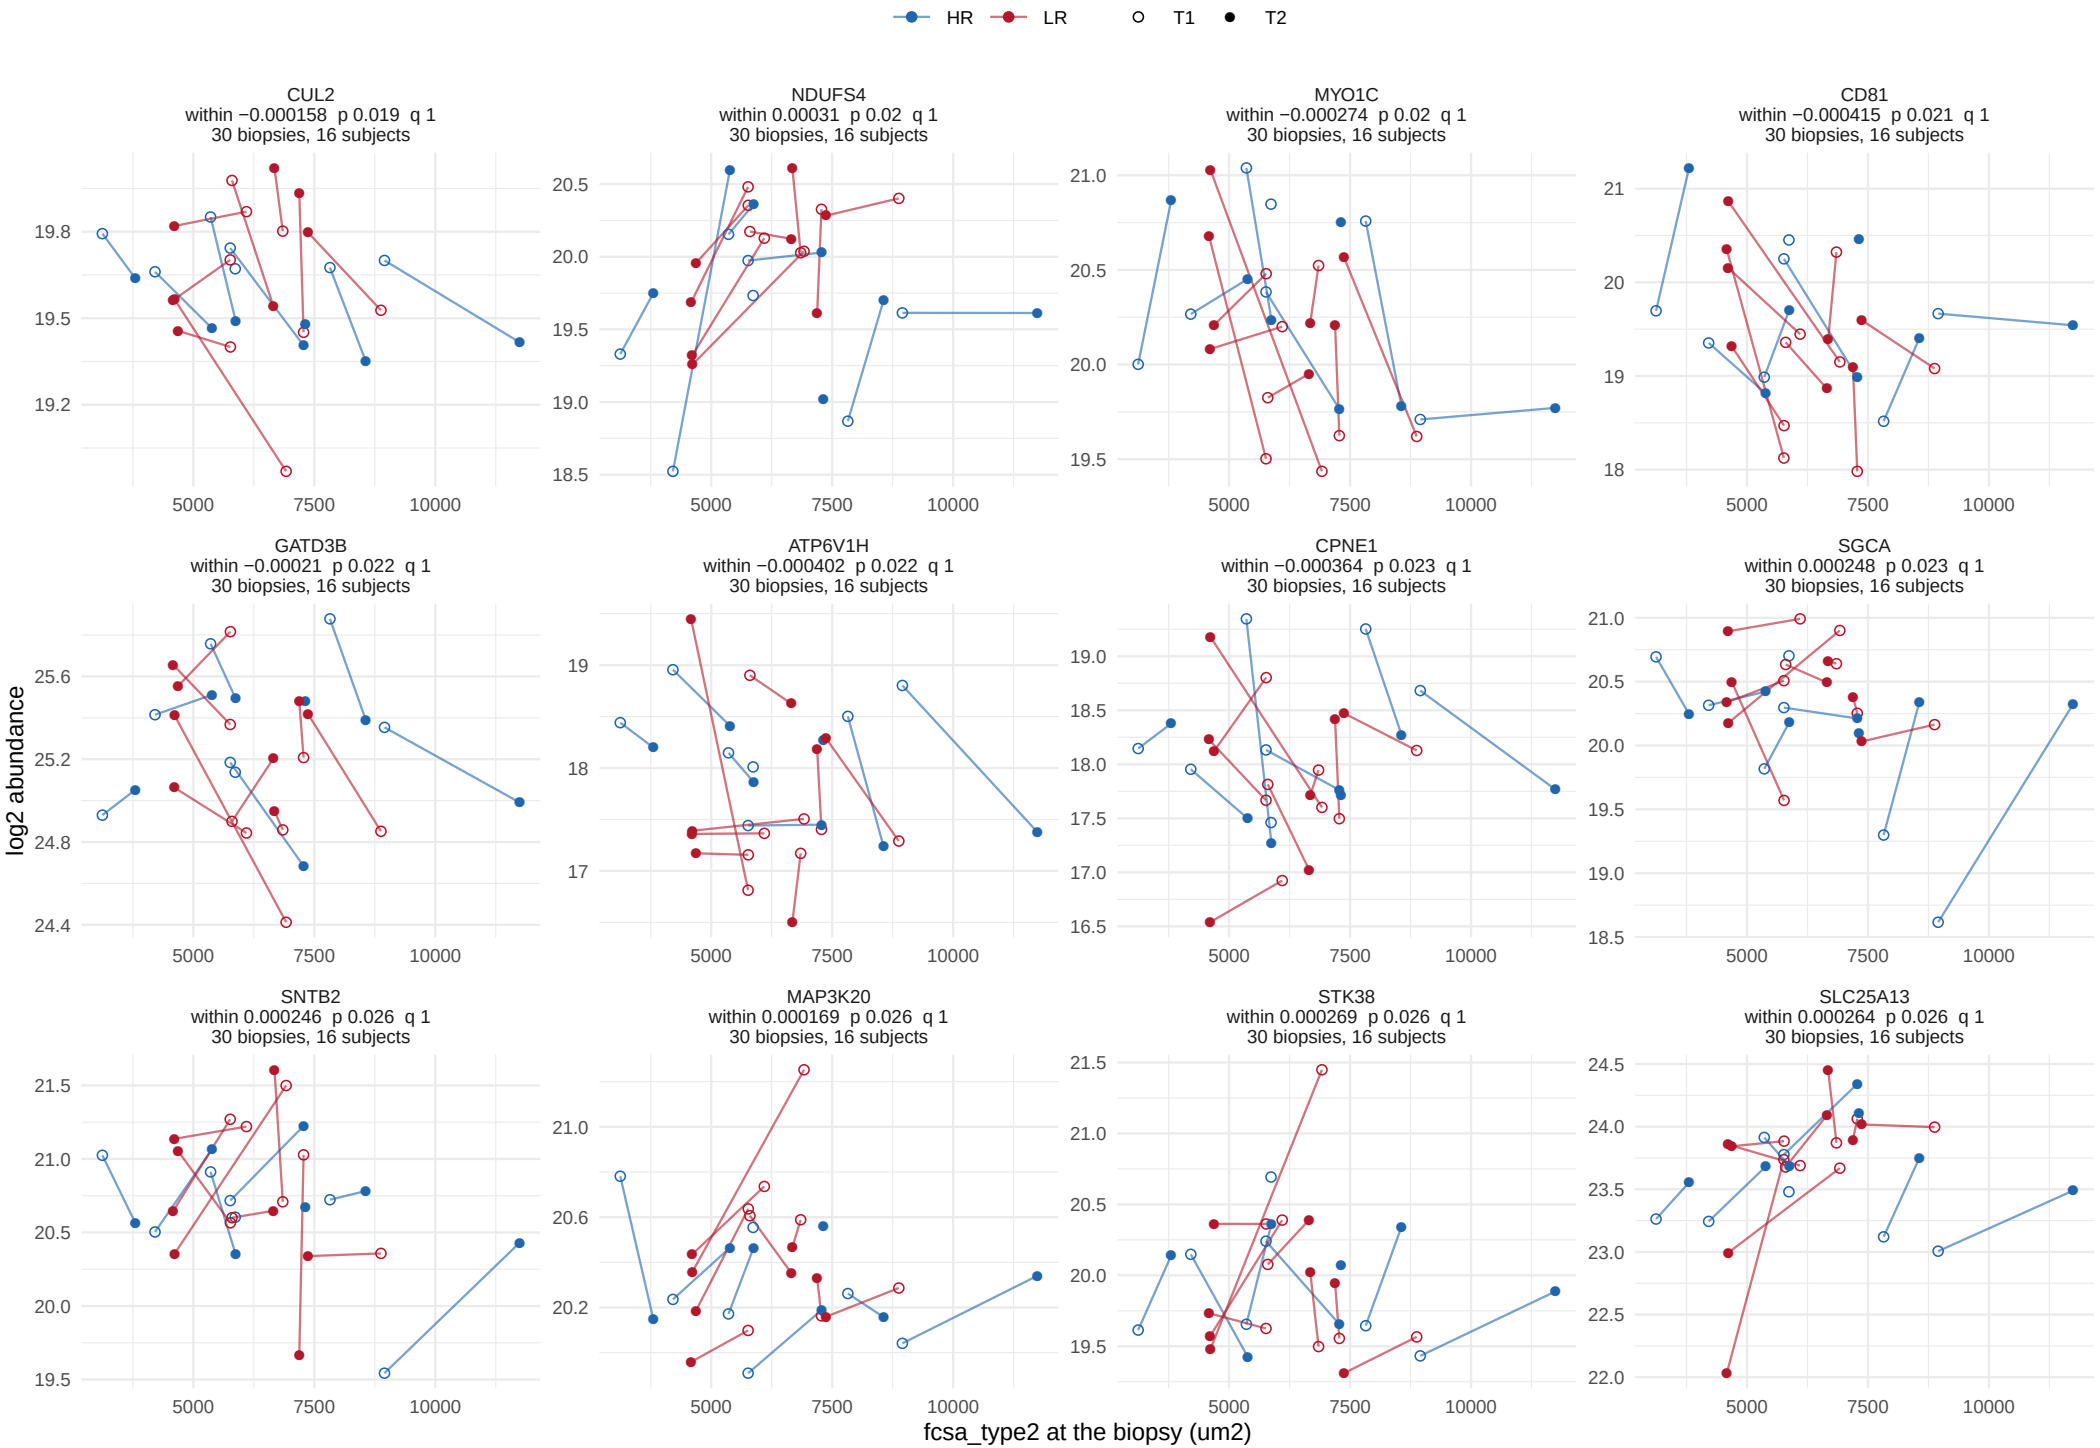

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_type2, within−person term


74 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 4 of 7.

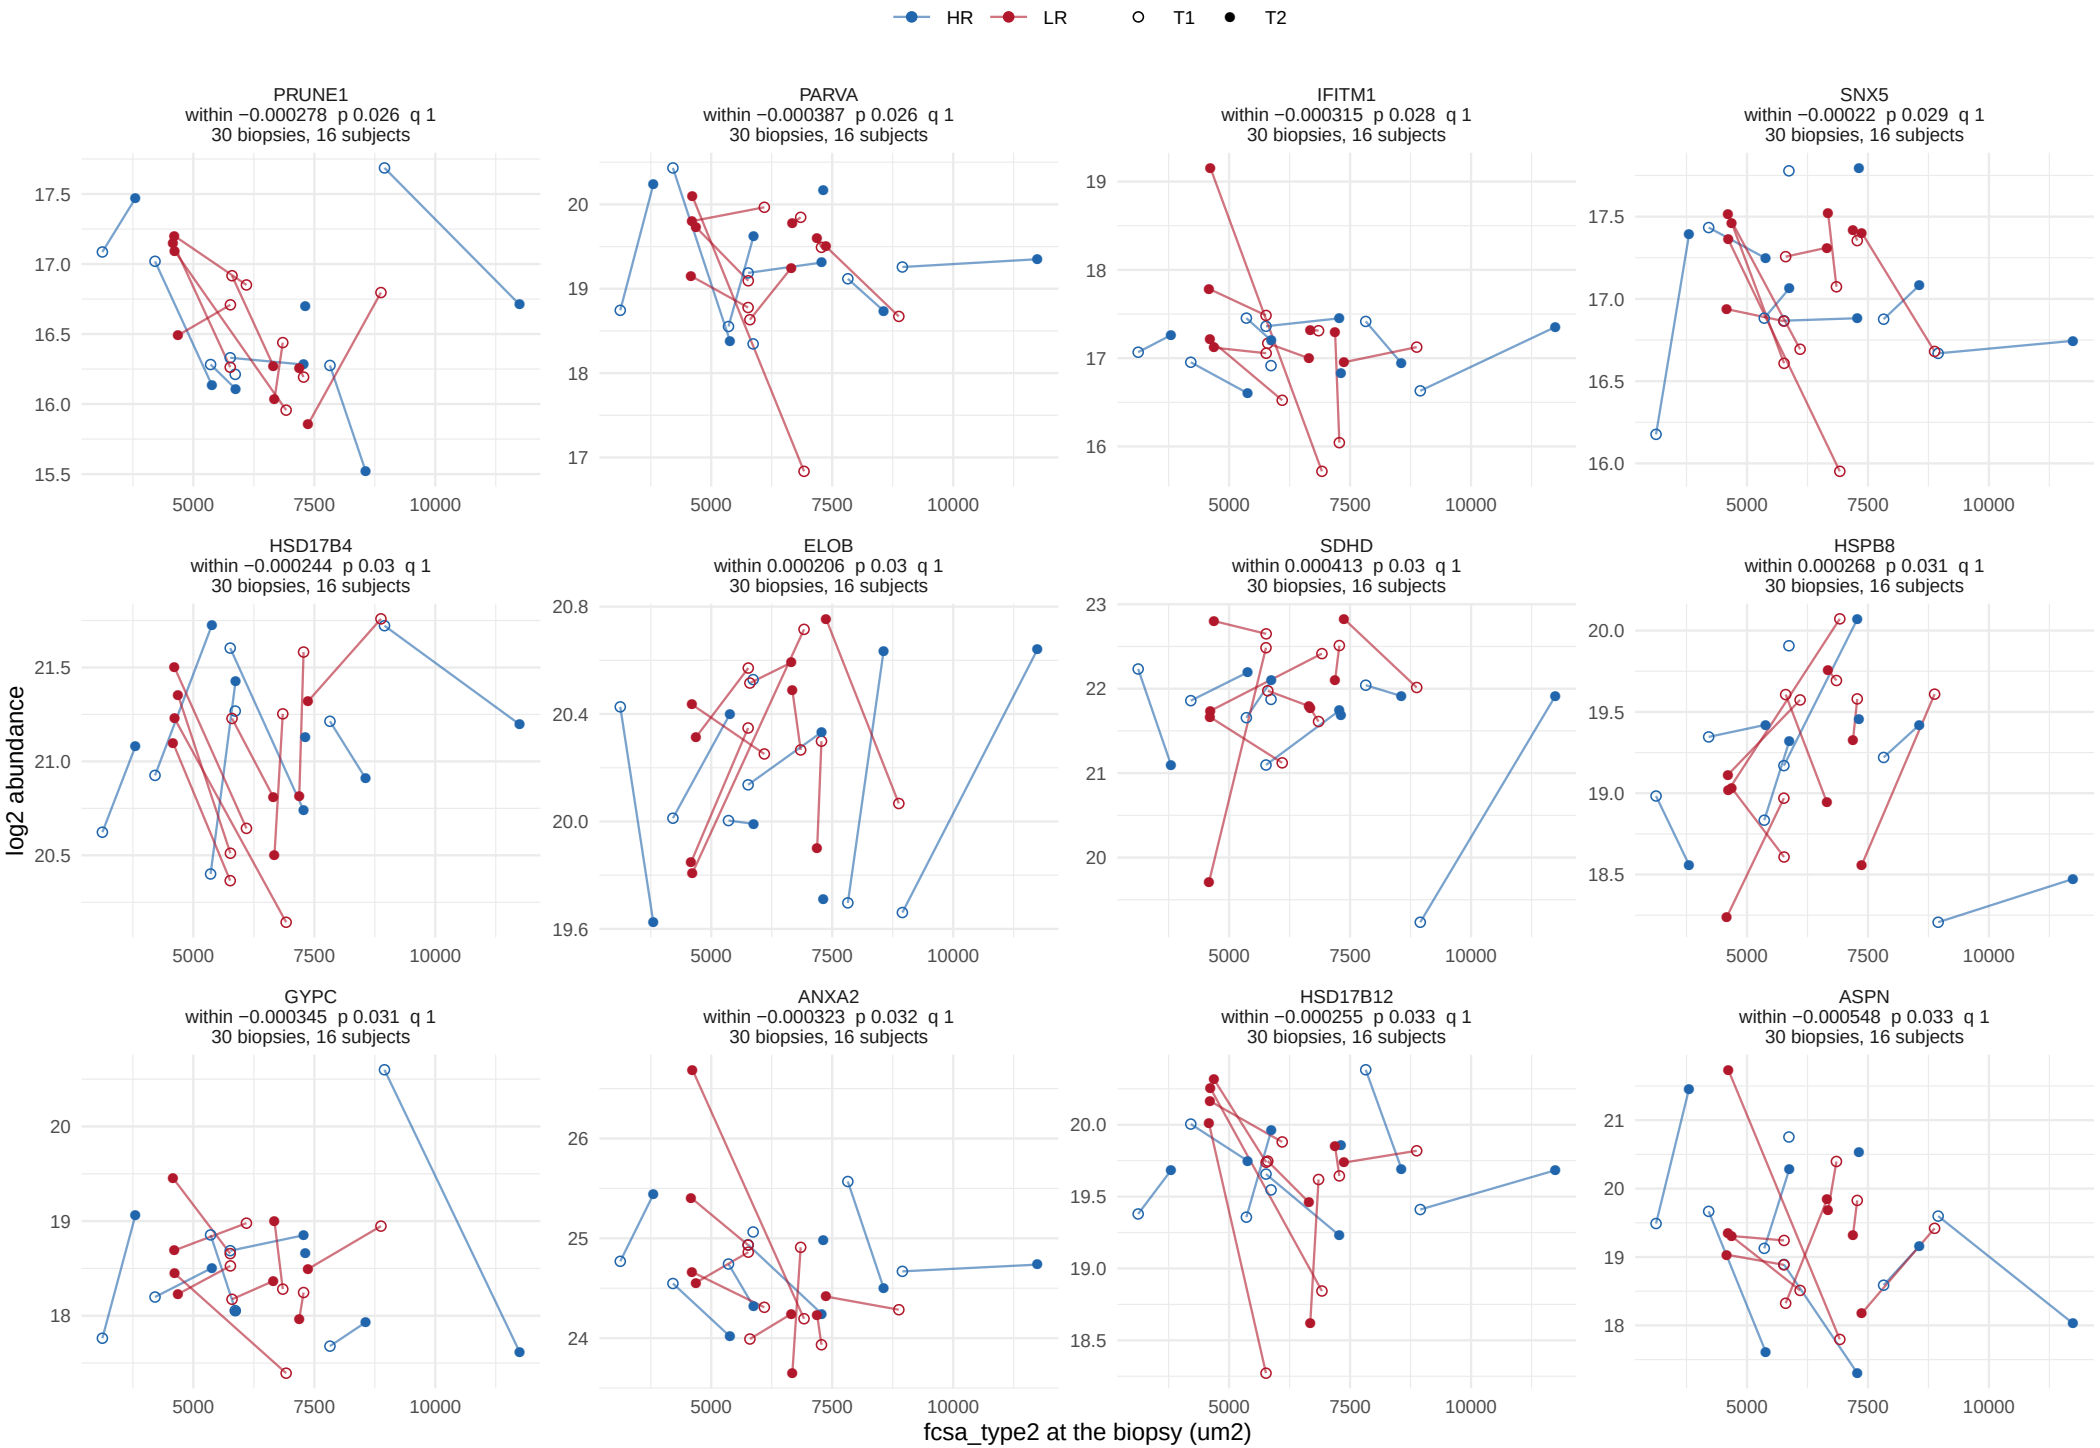

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_type2, within−person term


74 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 5 of 7.

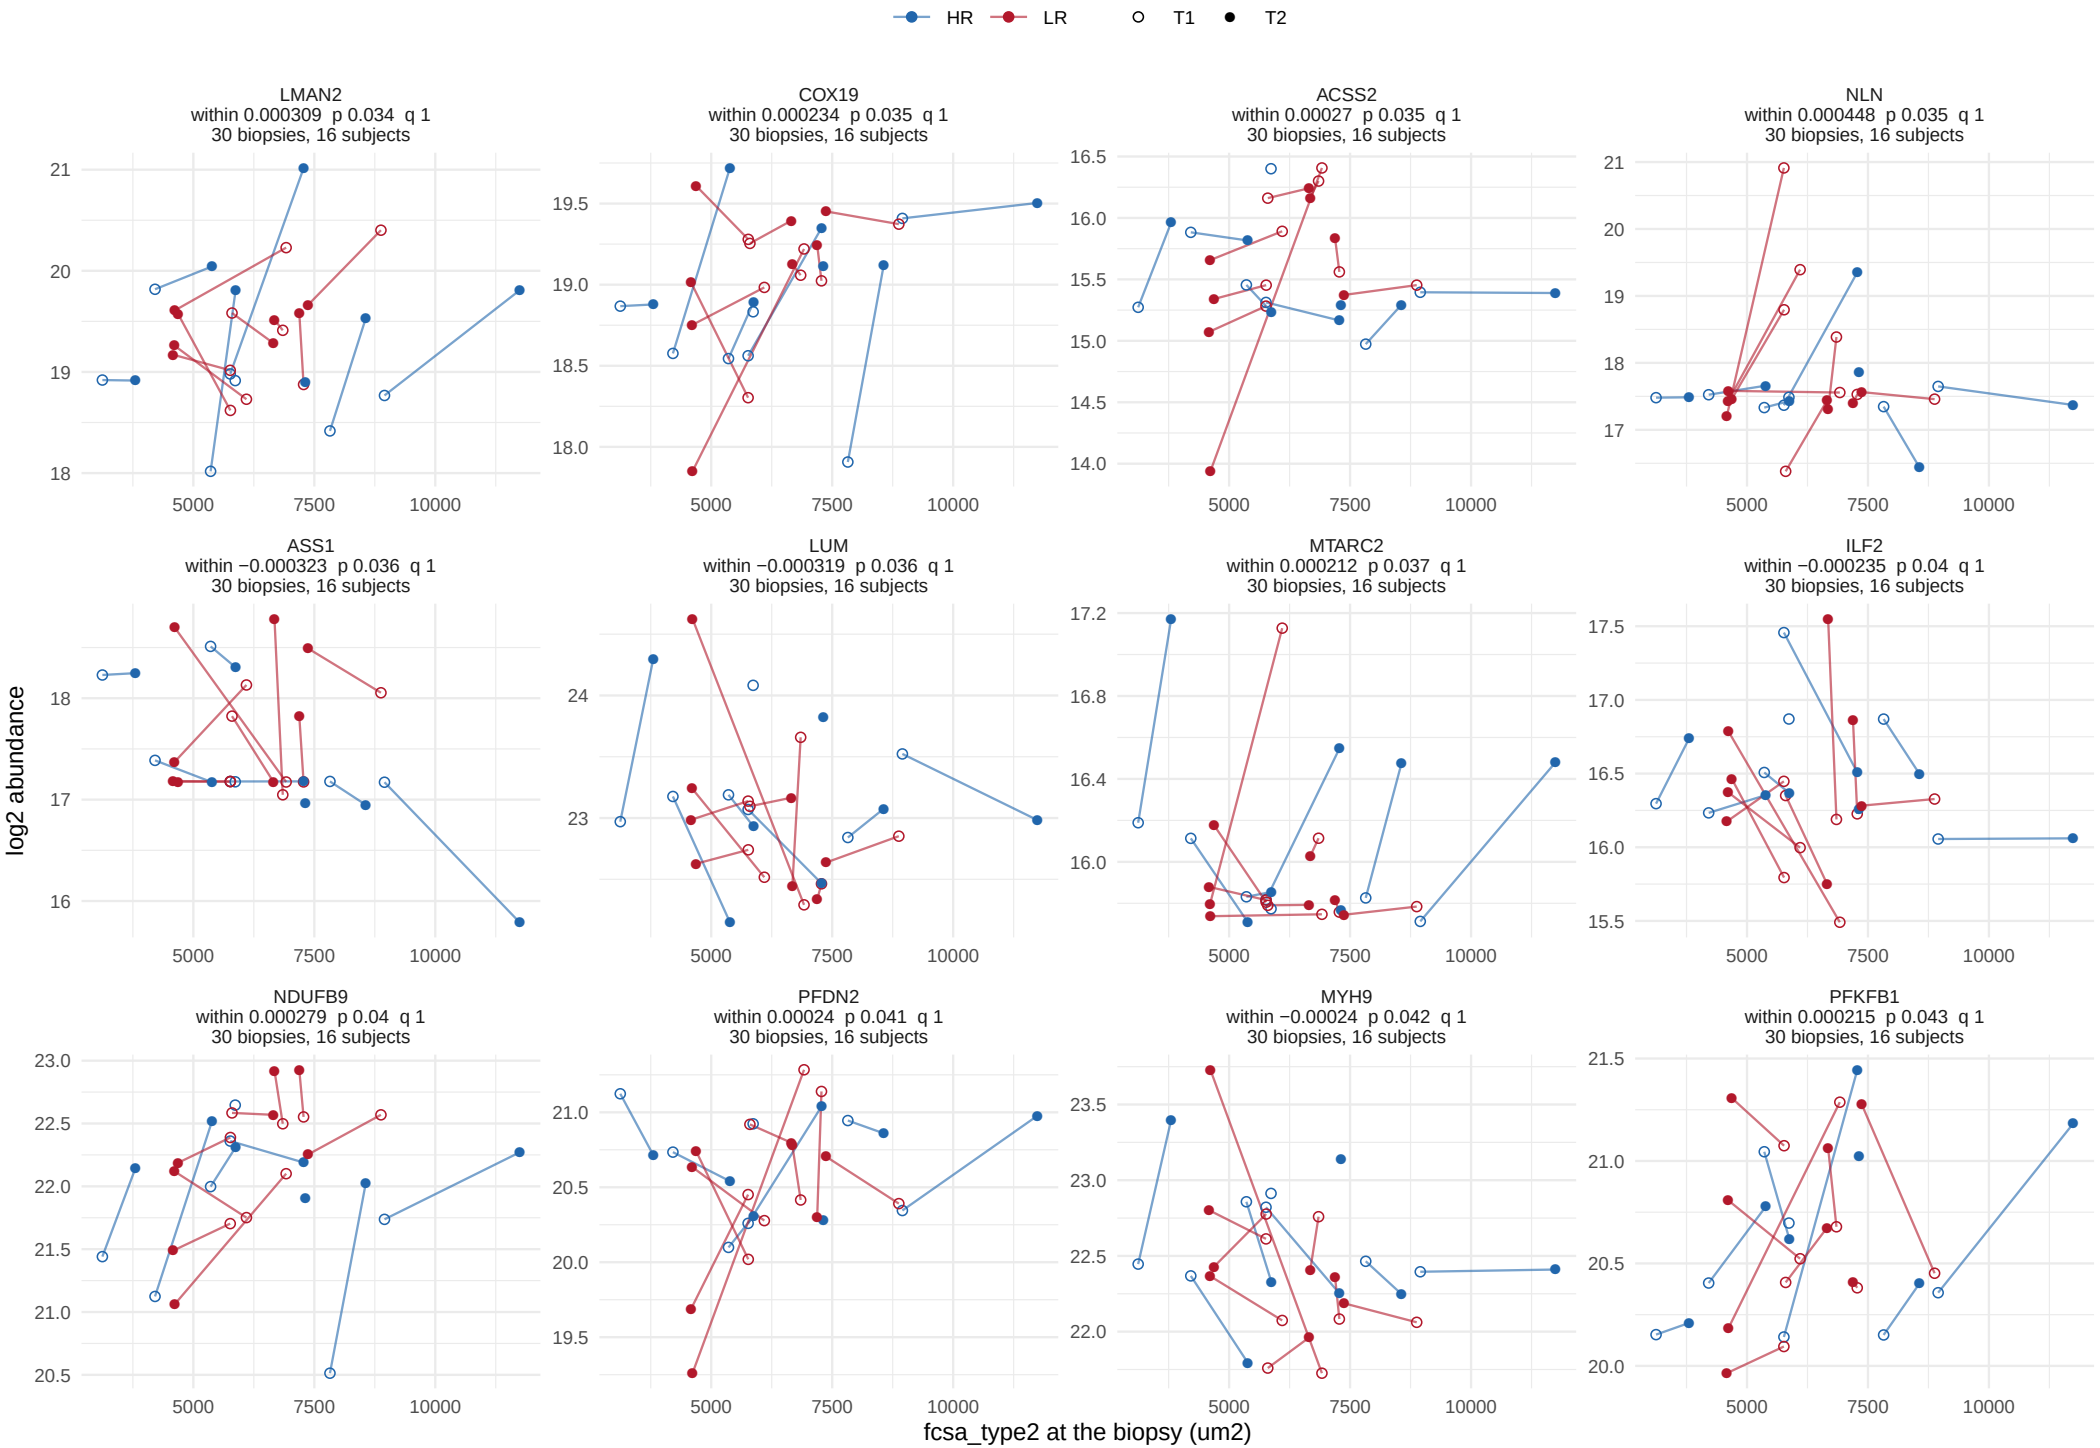

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_type2, within−person term


74 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 6 of 7.

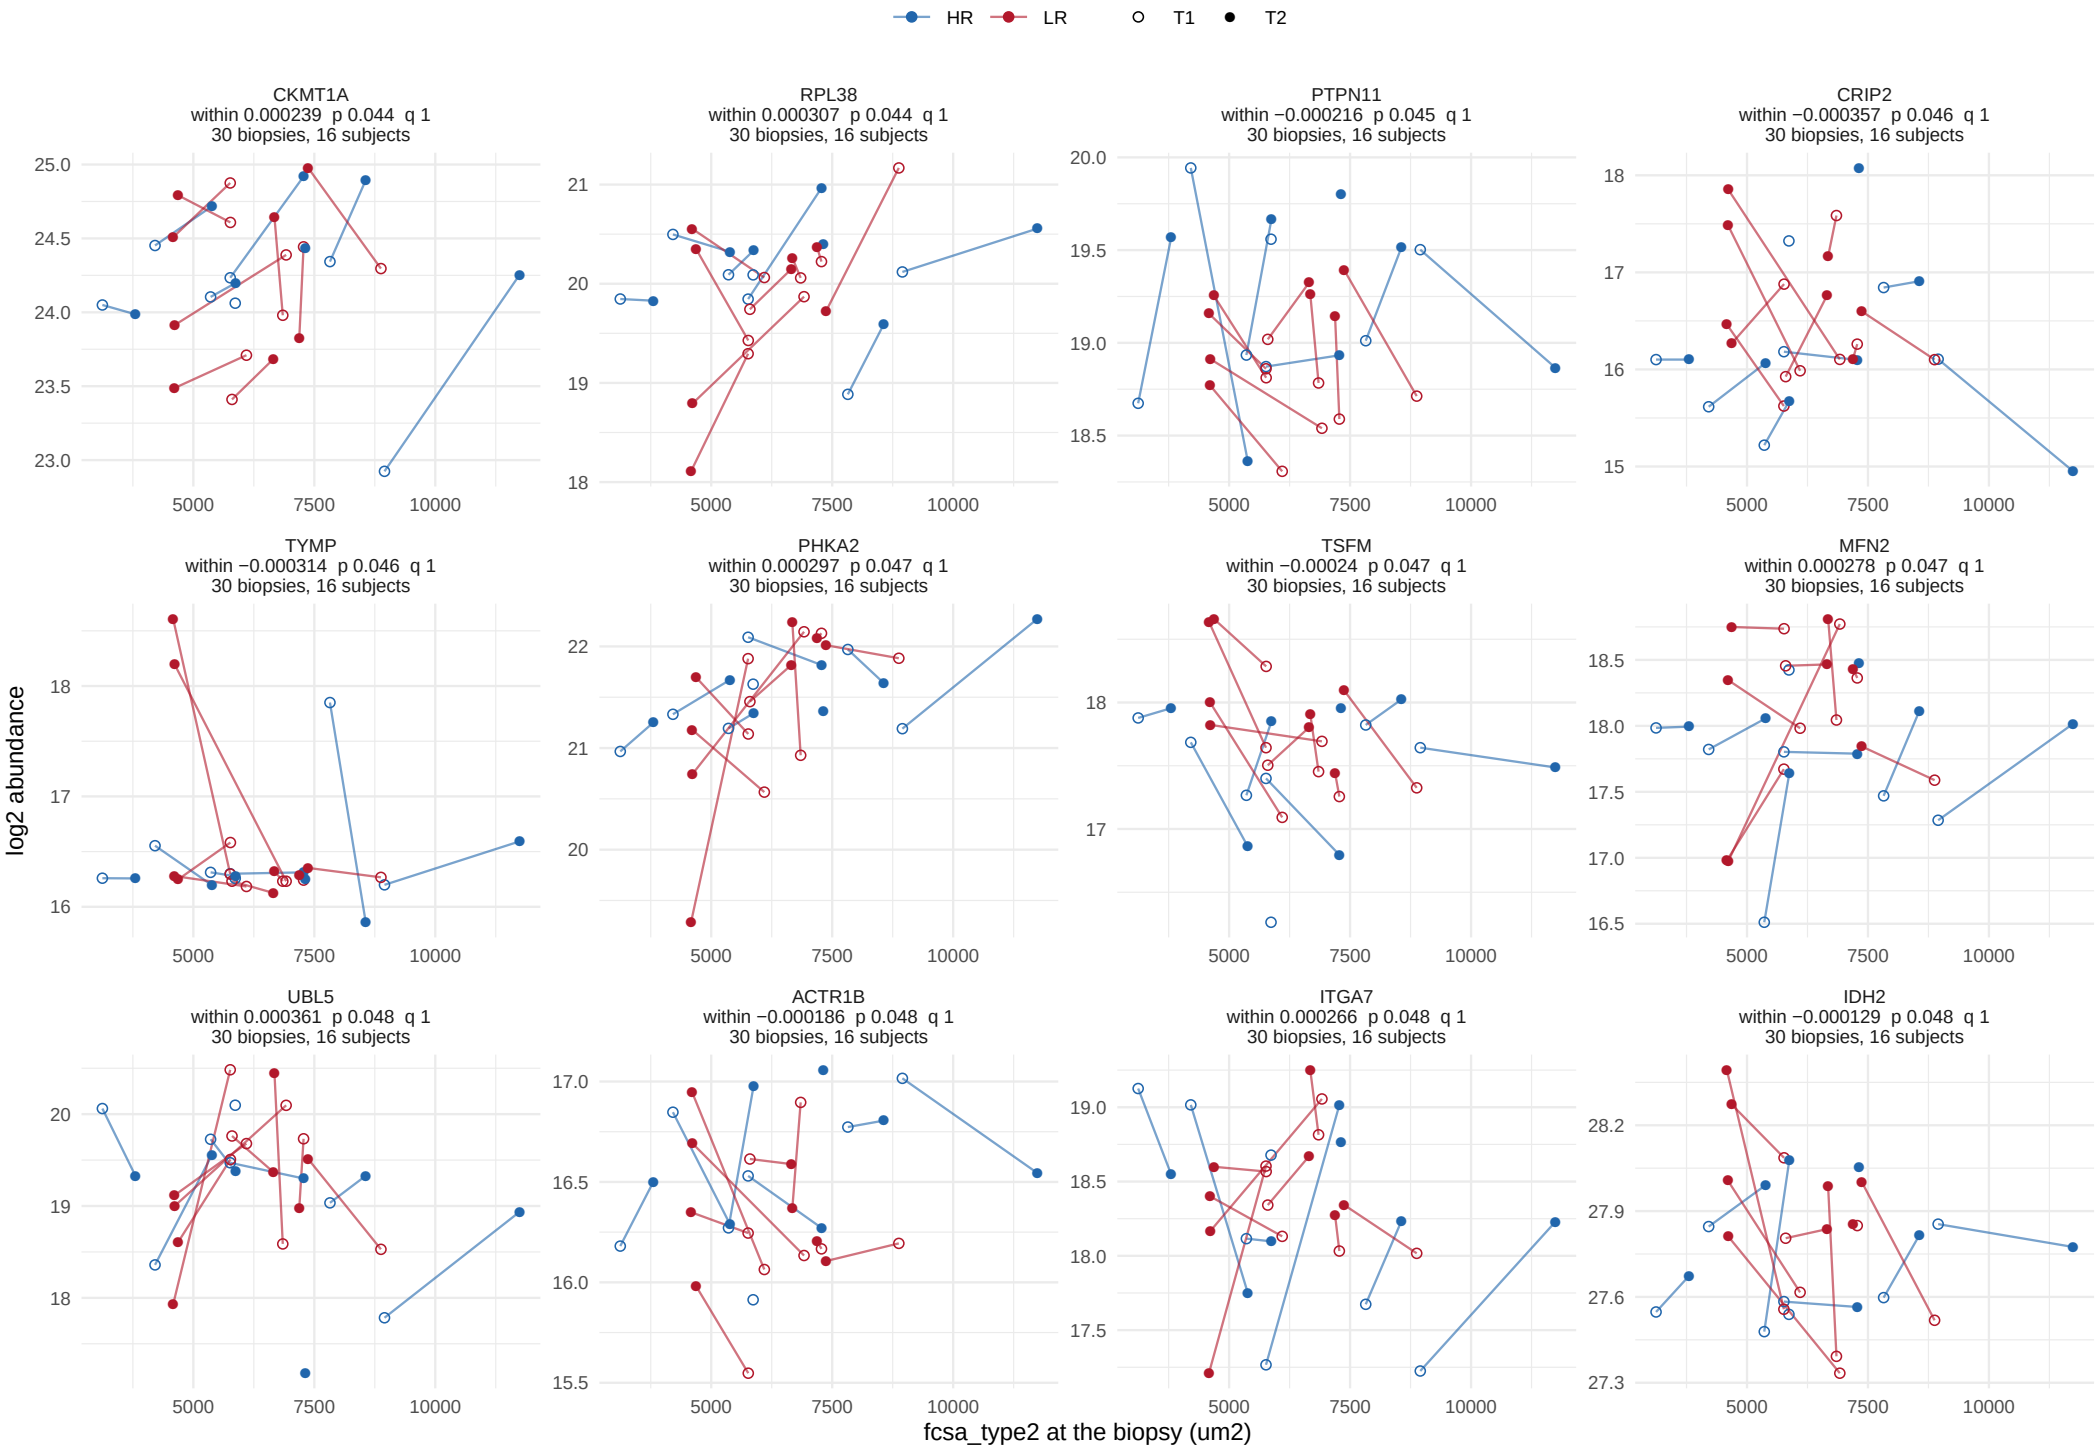

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_type2, within−person term


74 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 7 of 7.

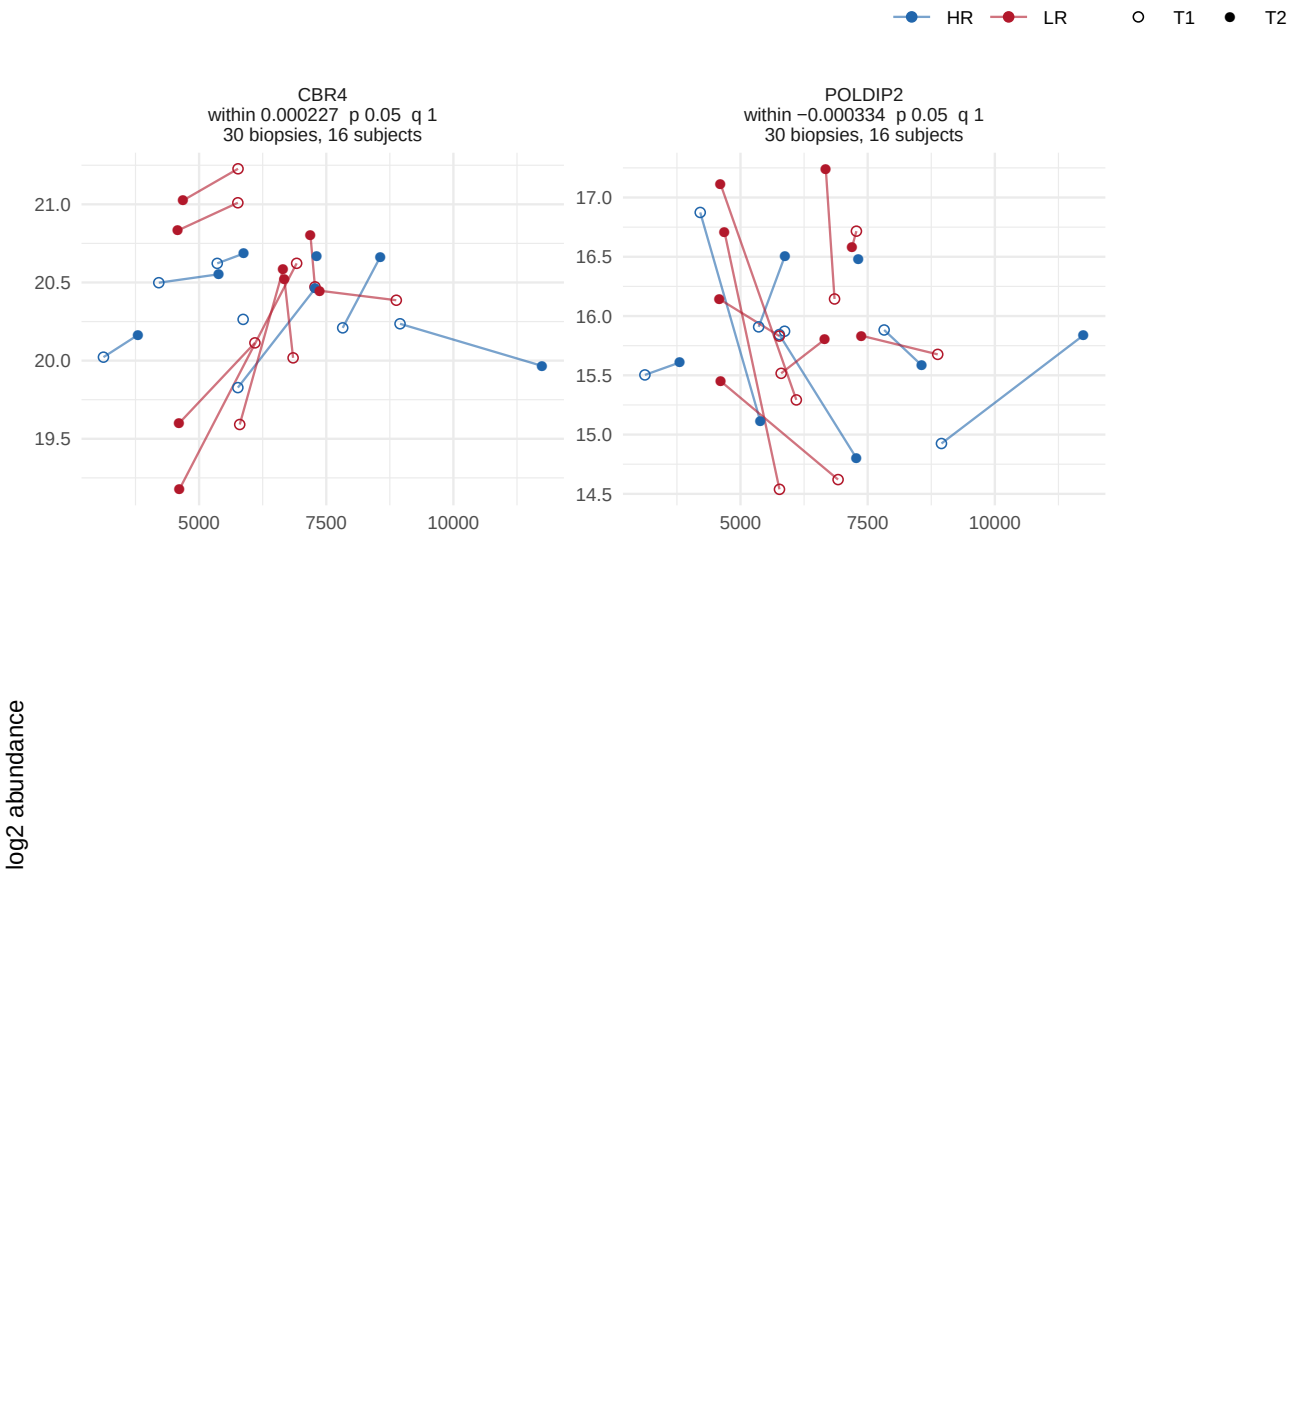

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_type2, between−person term


89 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 1 of 8.

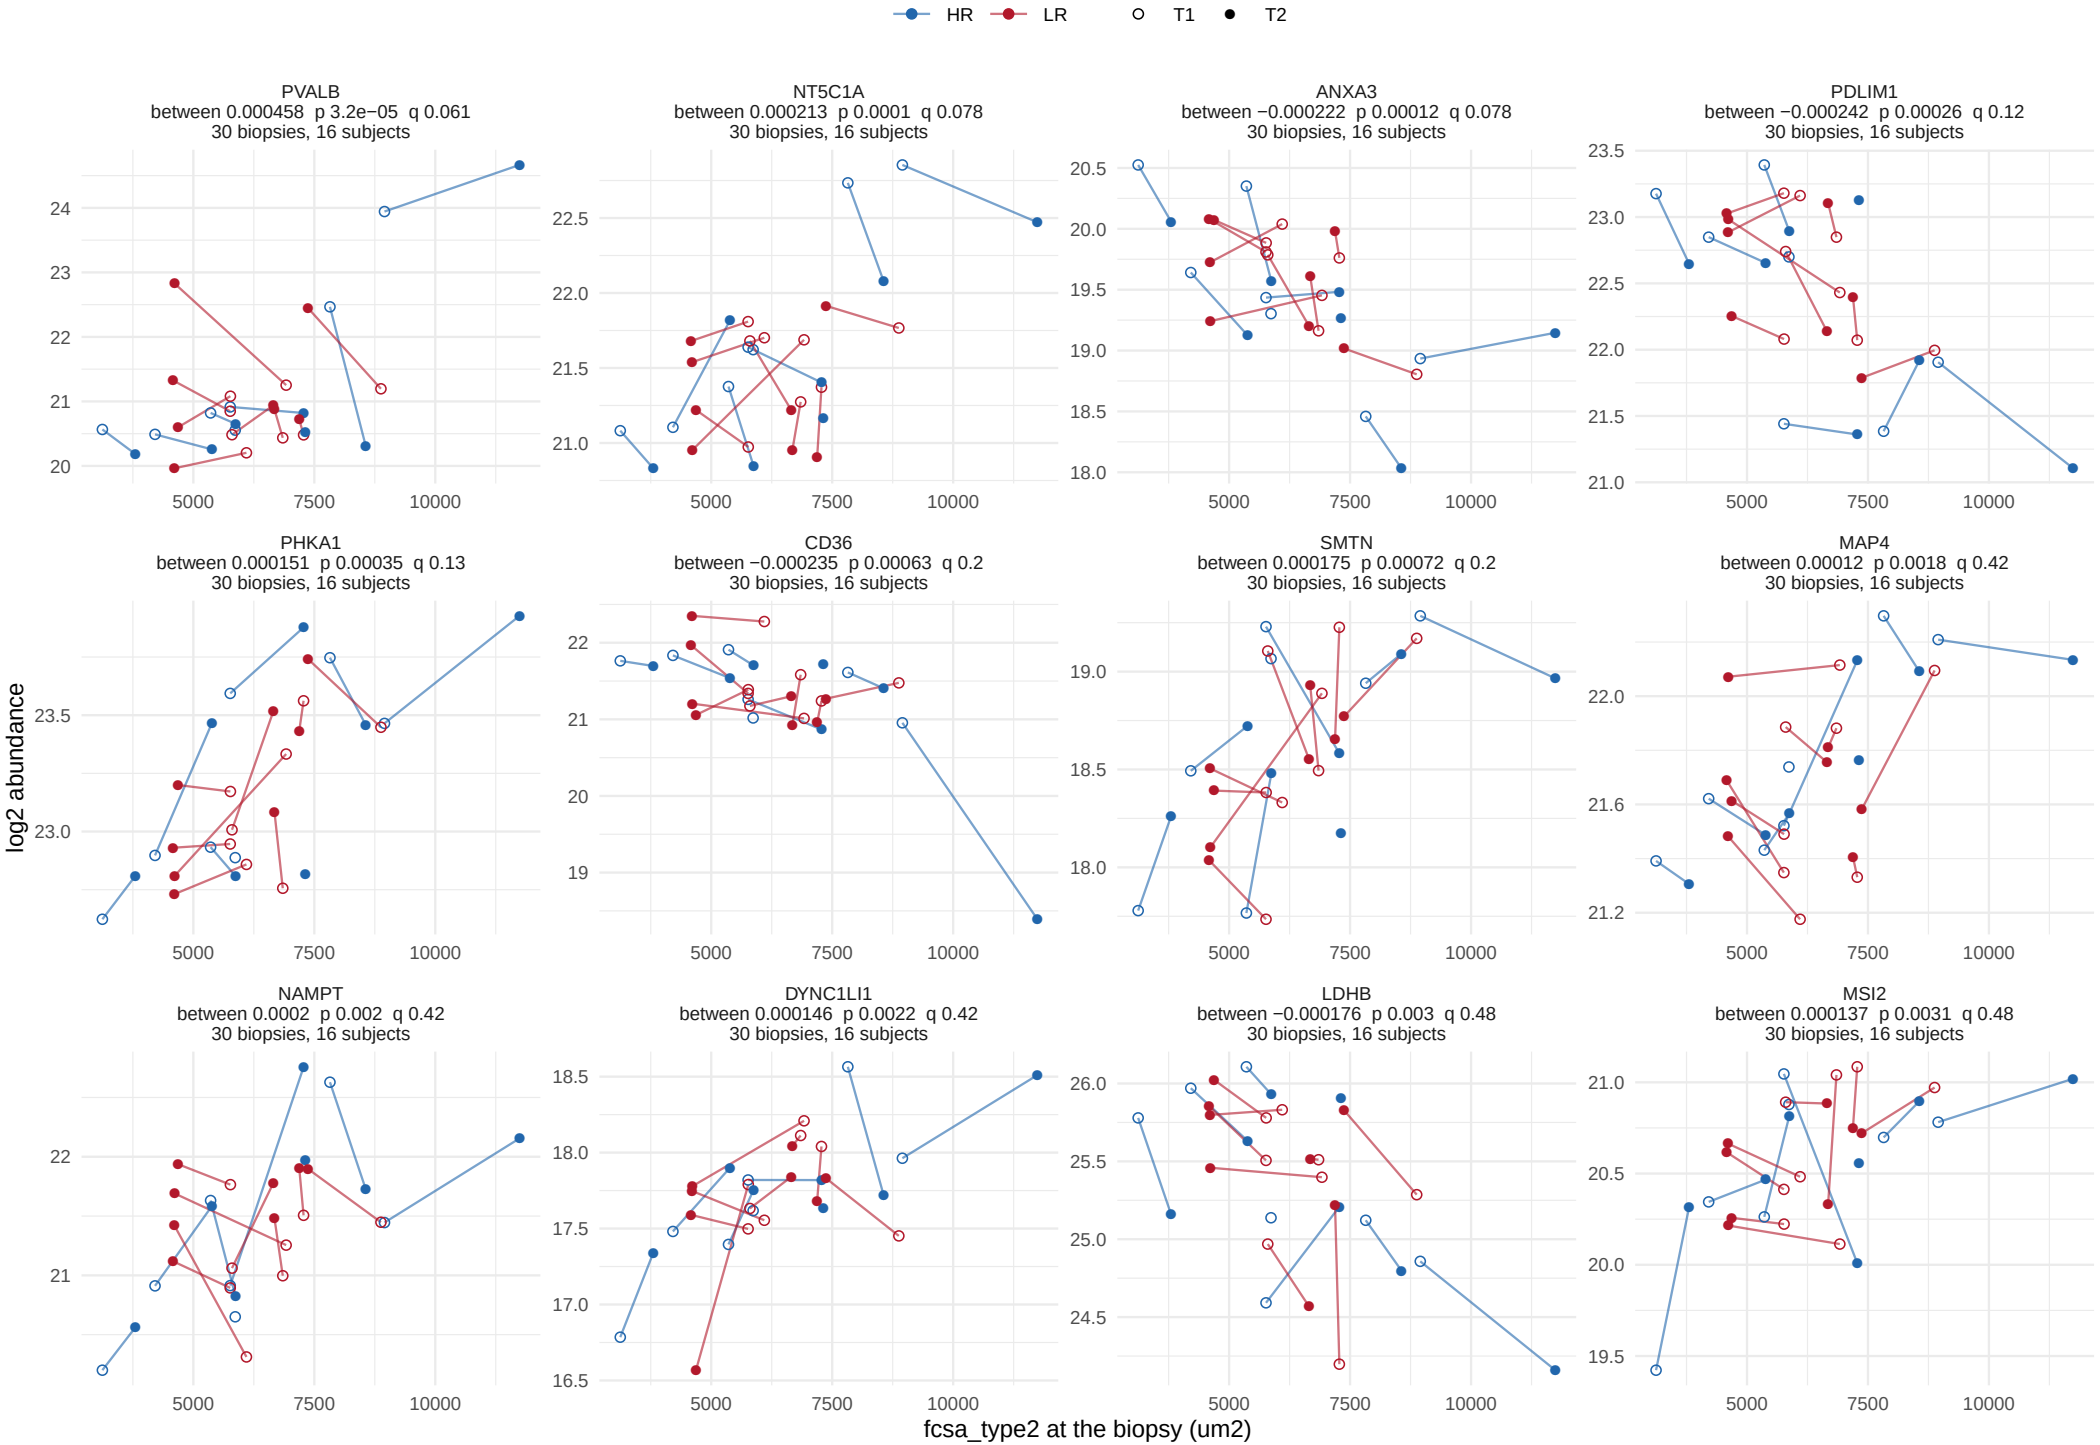

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_type2, between−person term


89 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 2 of 8.

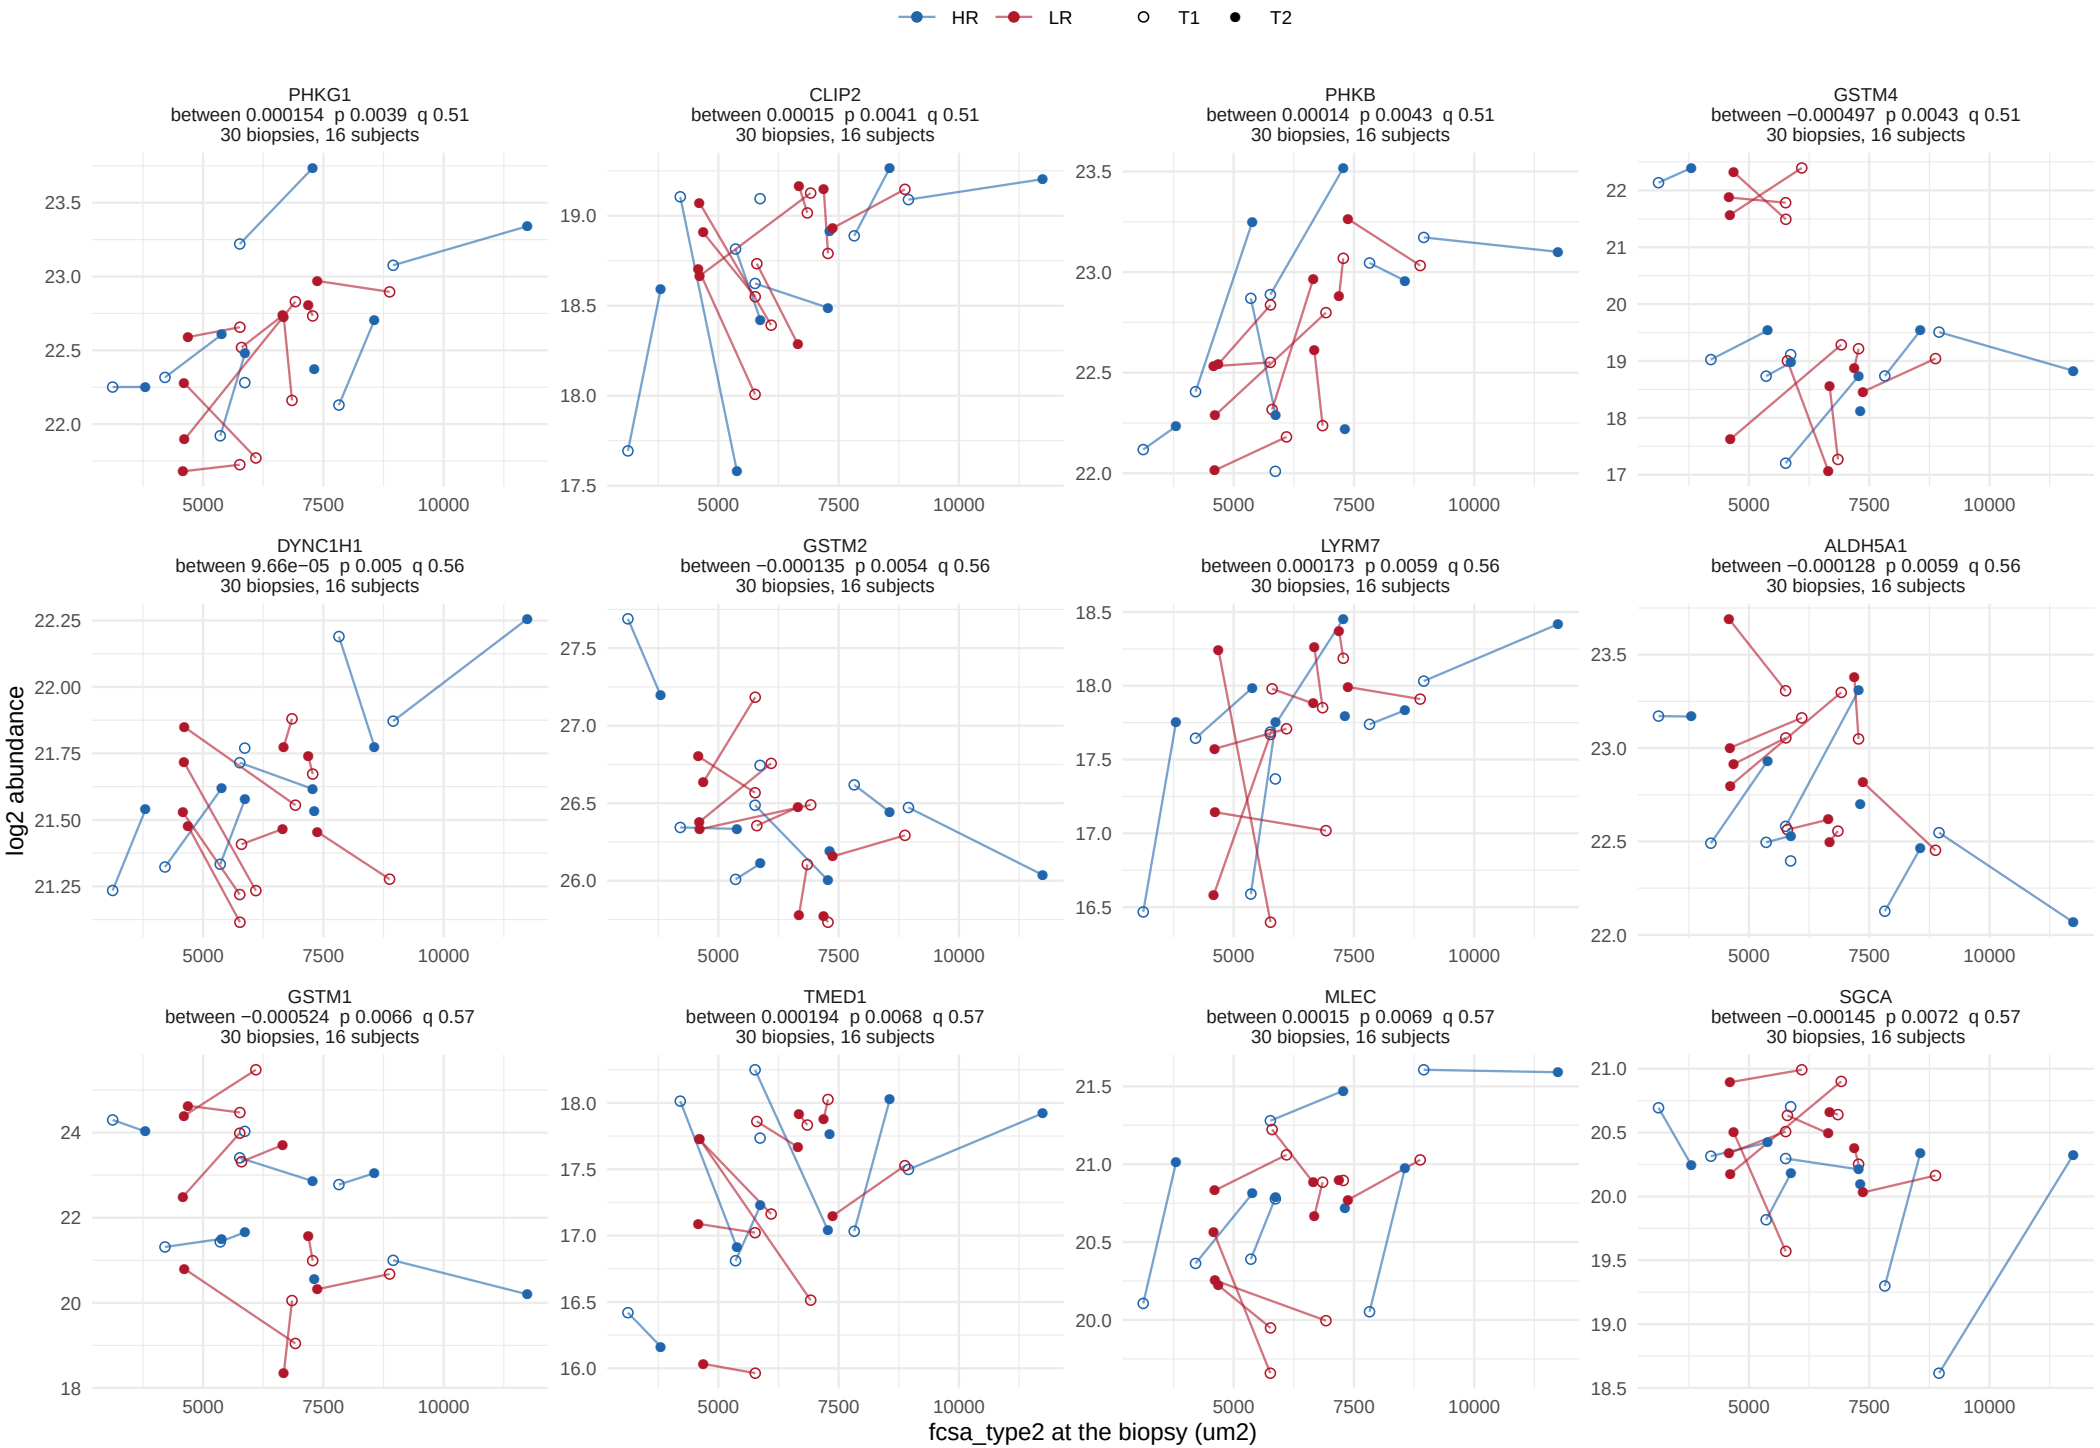

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_type2, between−person term


89 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 3 of 8.

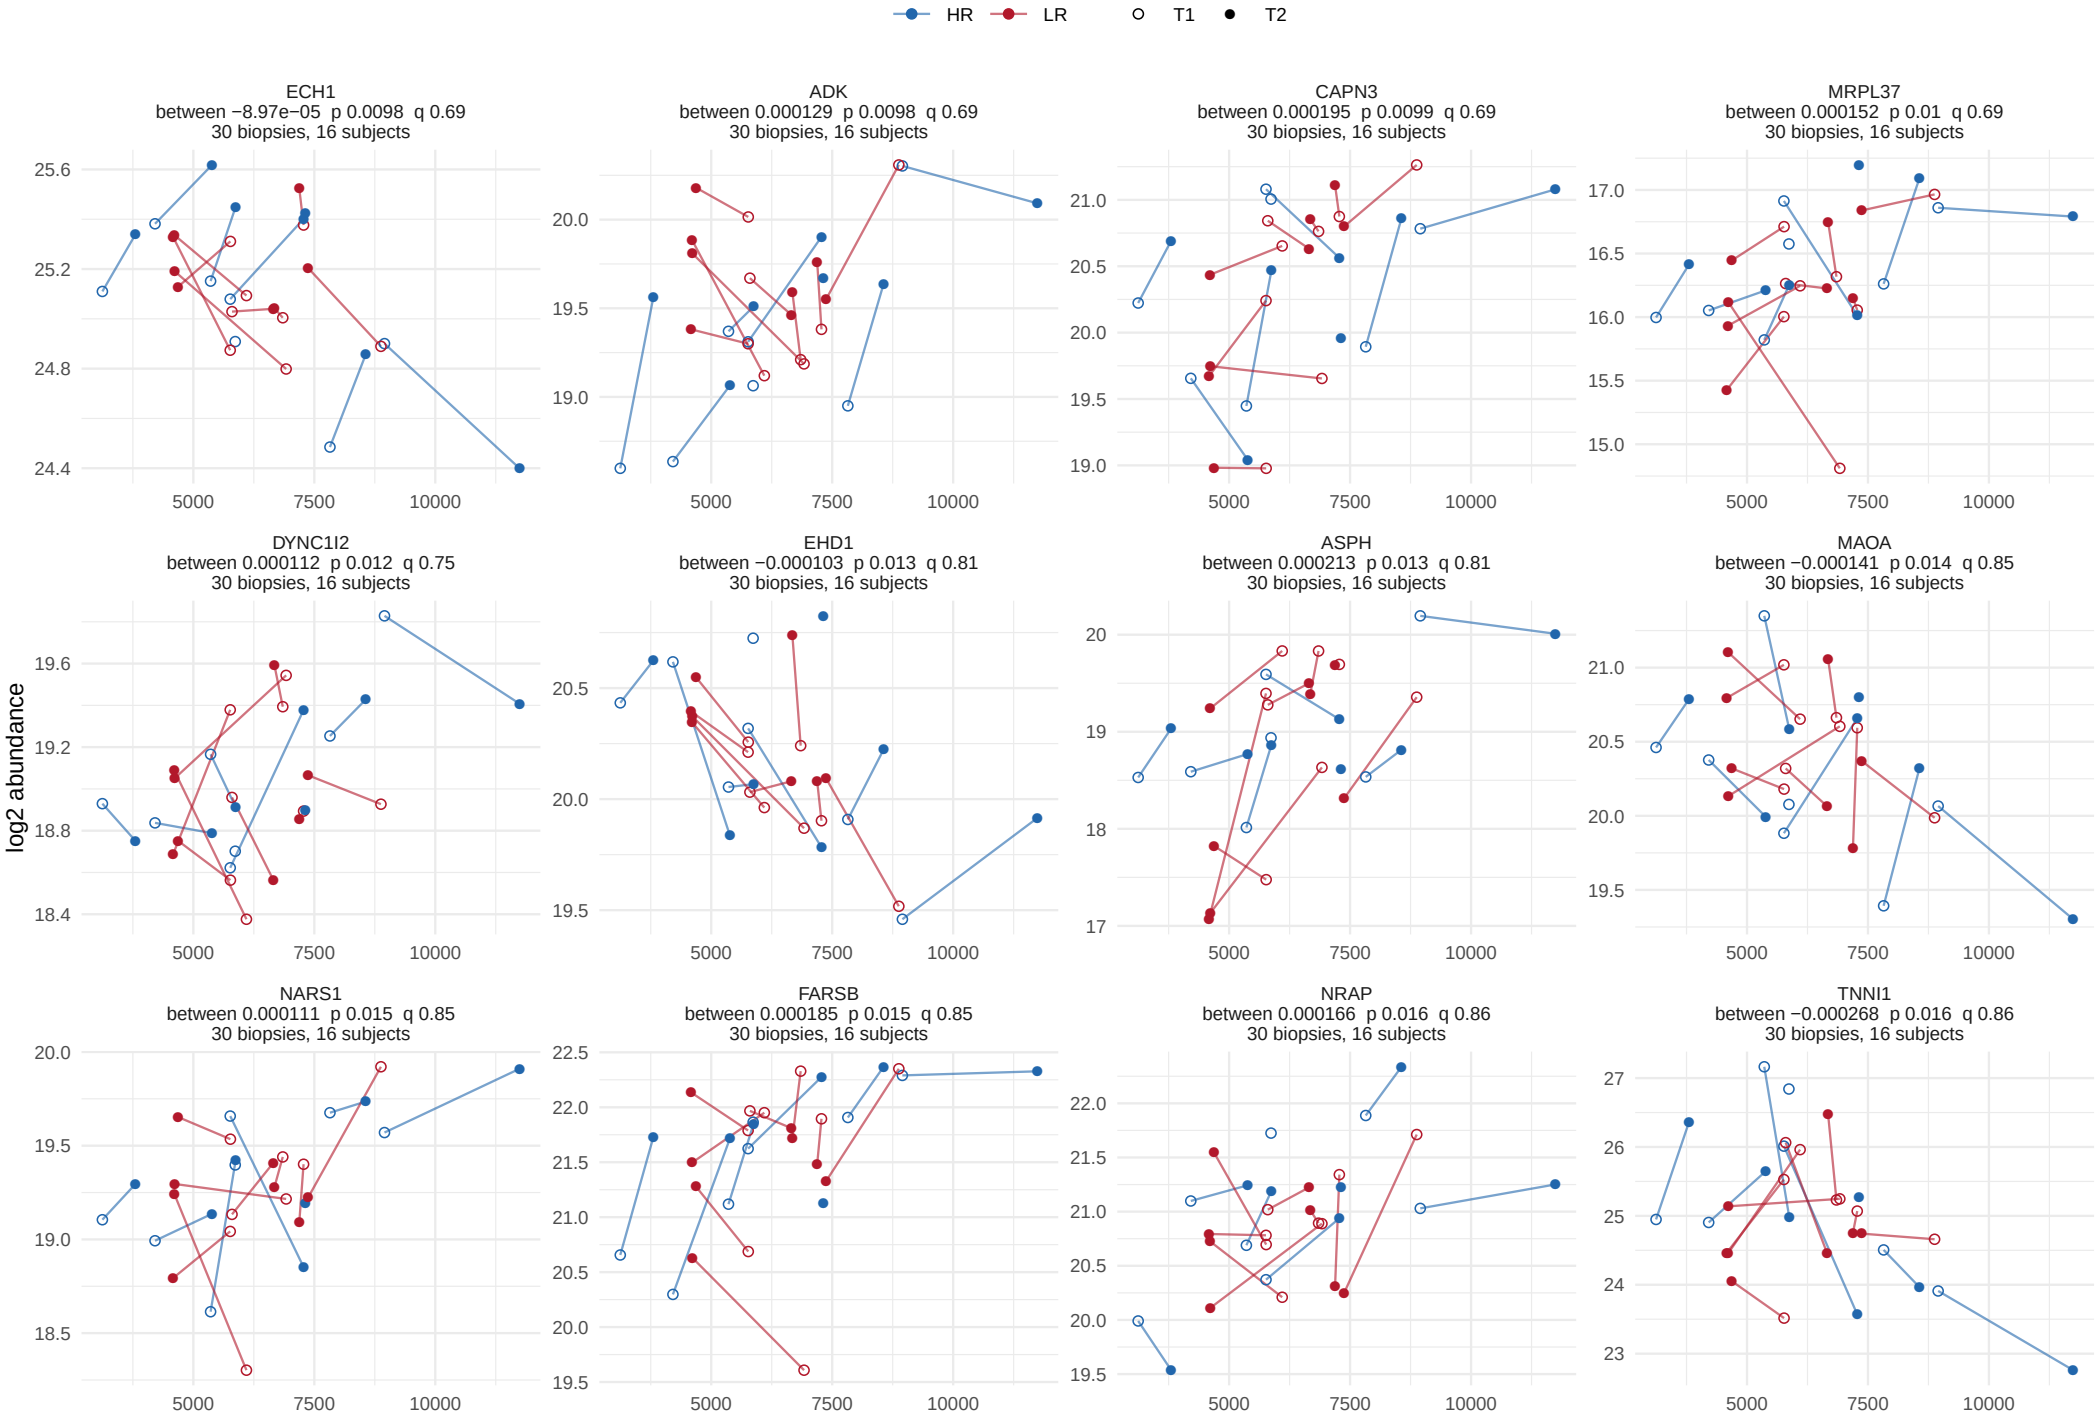

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_type2, between−person term


89 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 4 of 8.

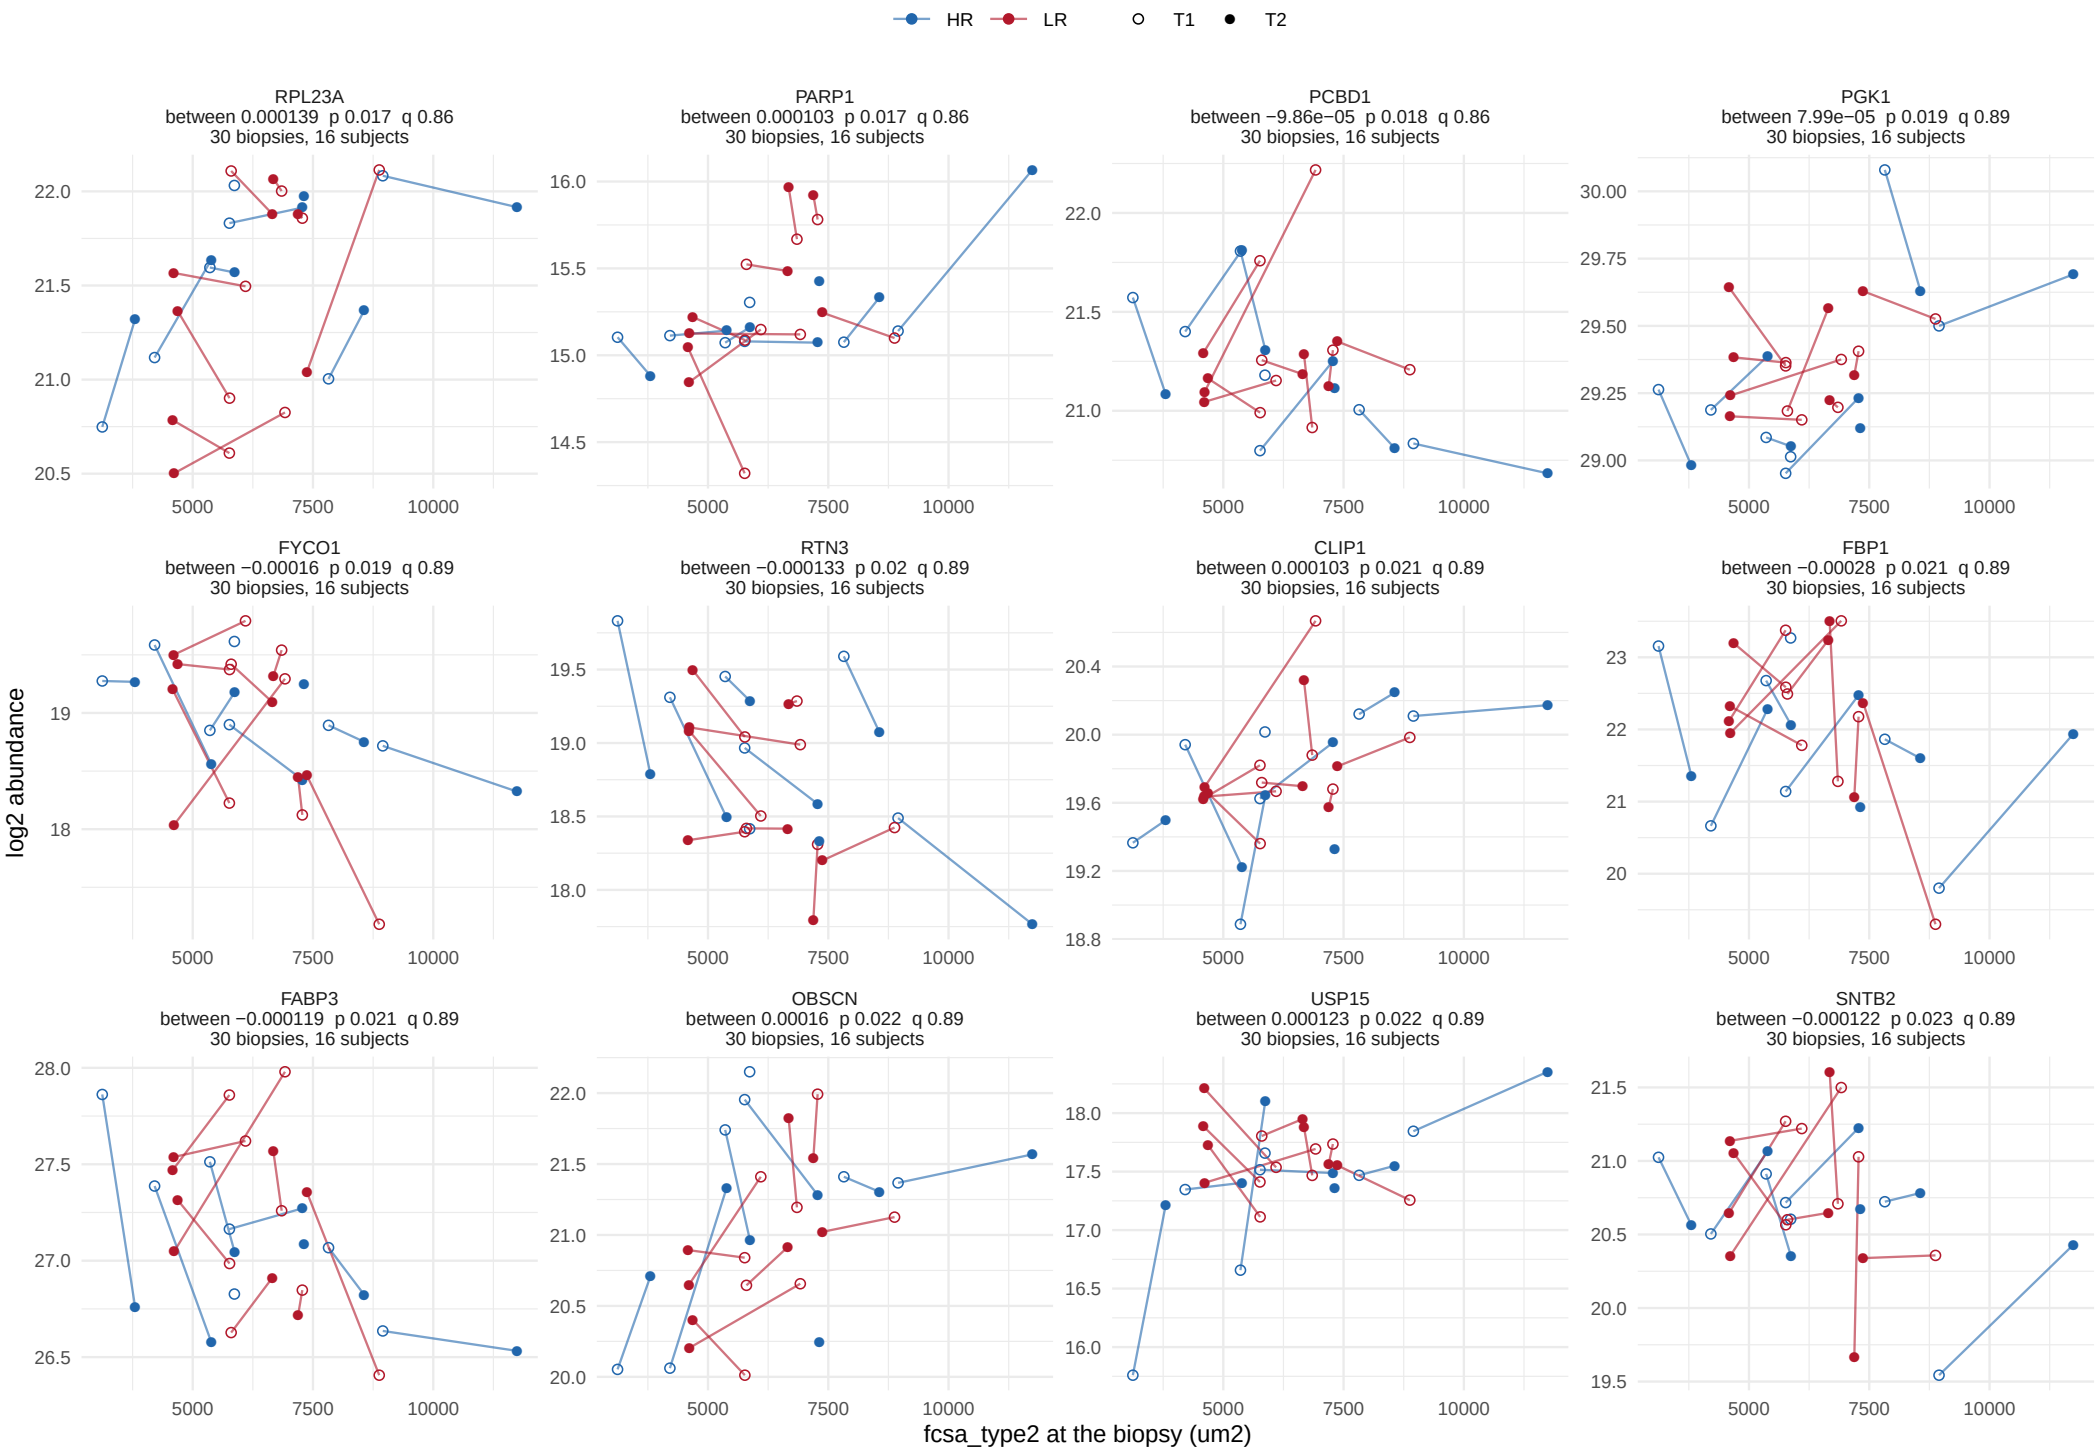

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_type2, between−person term


89 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 5 of 8.

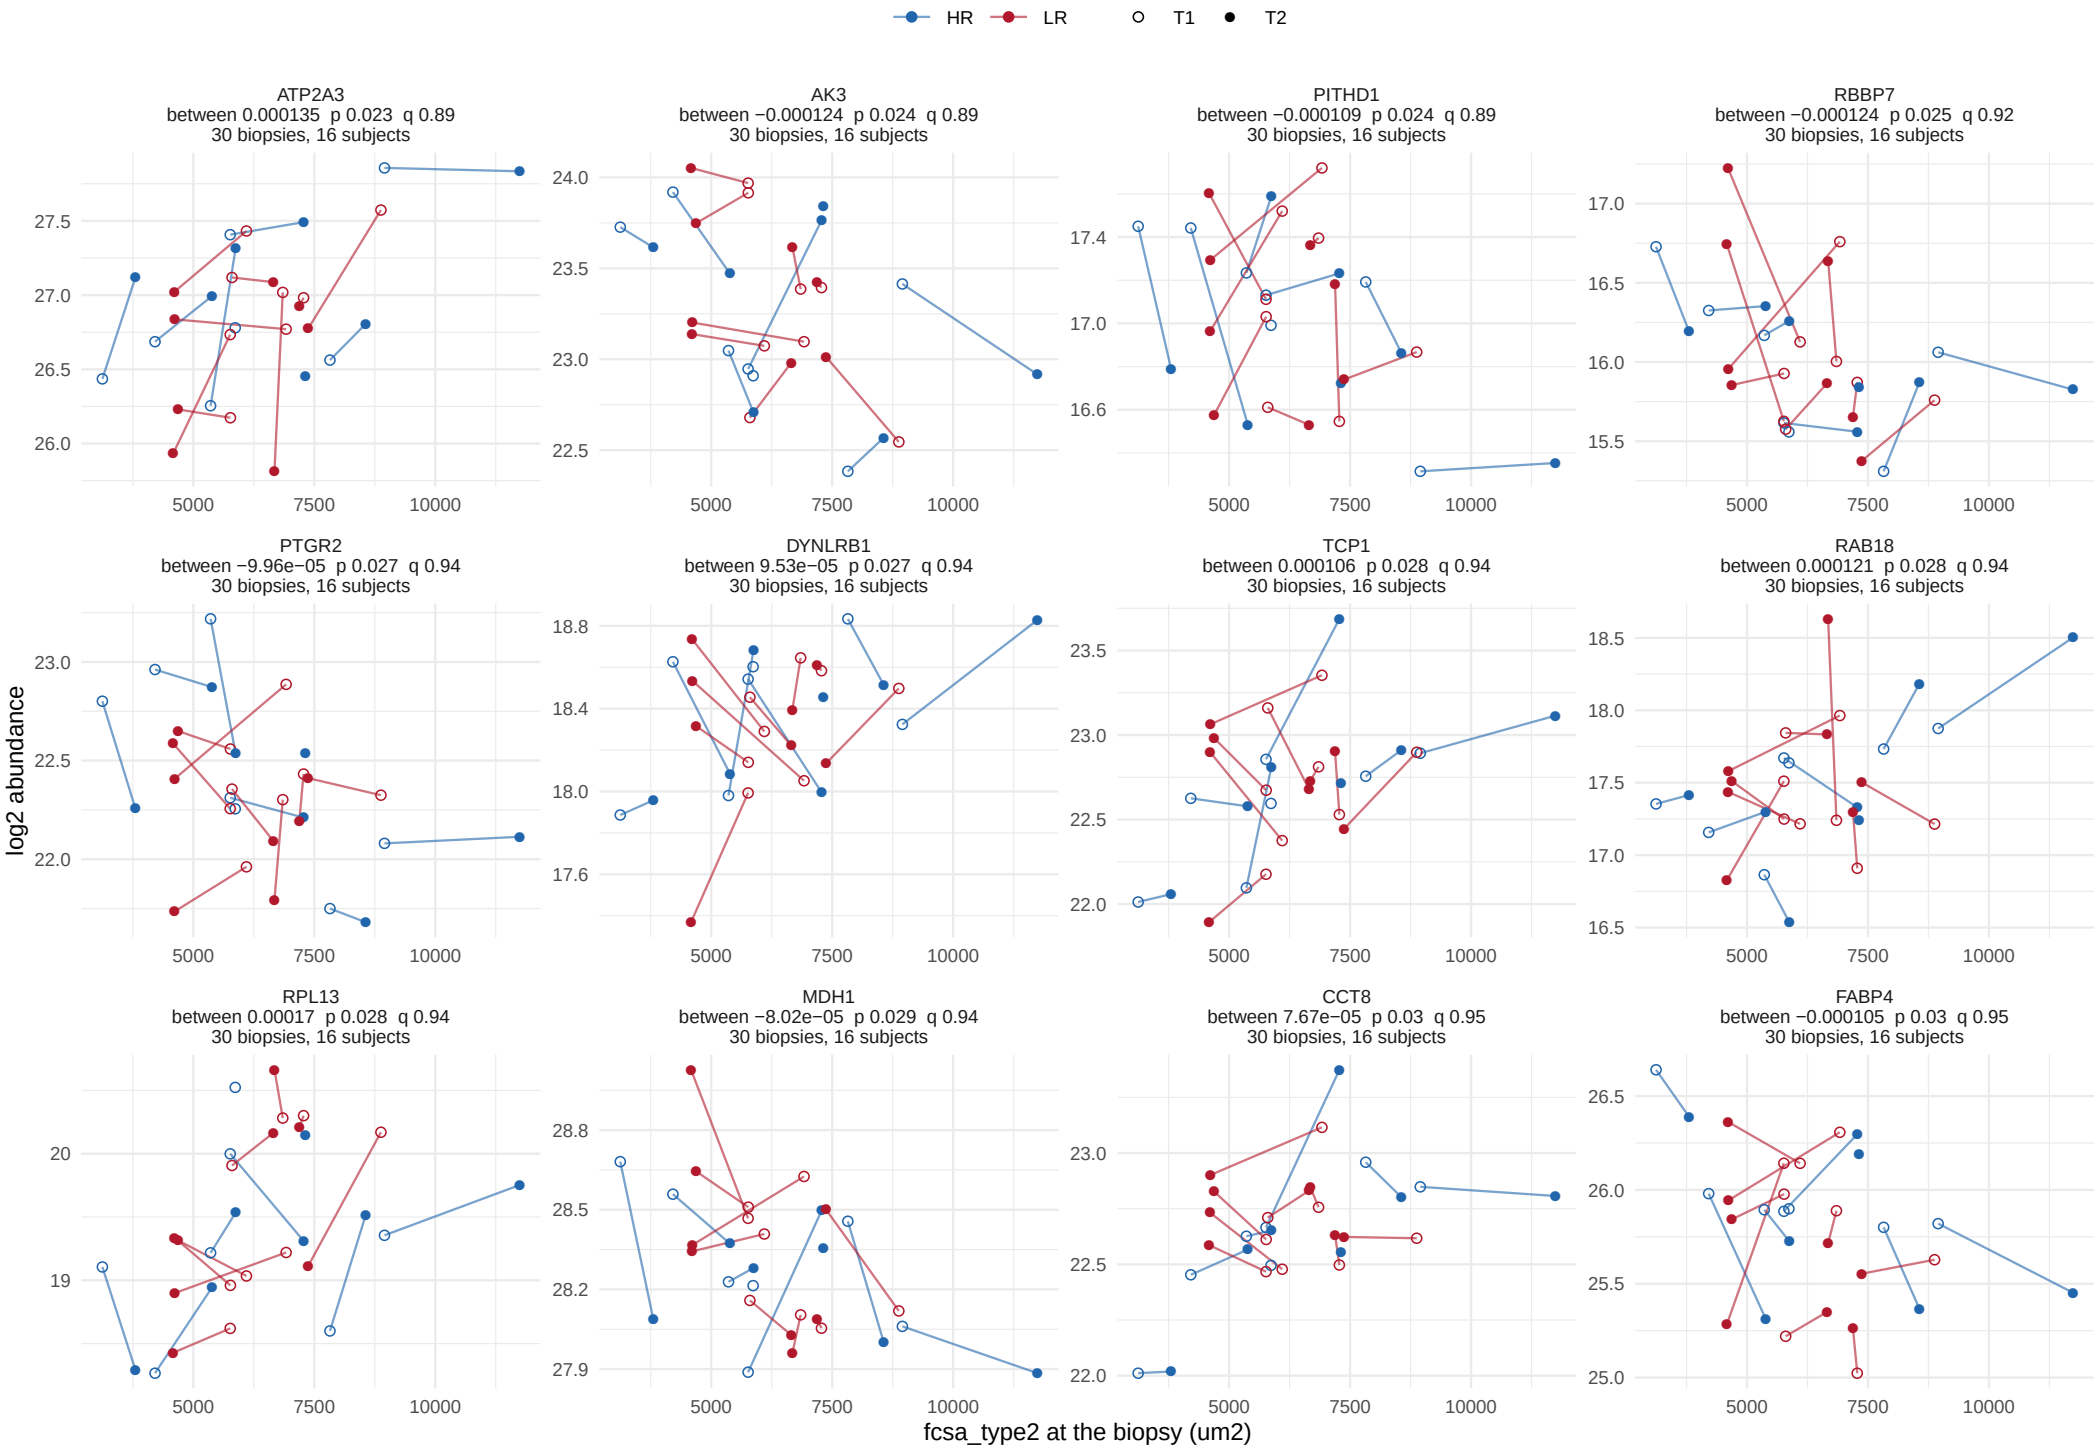

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_type2, between−person term


89 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 6 of 8.

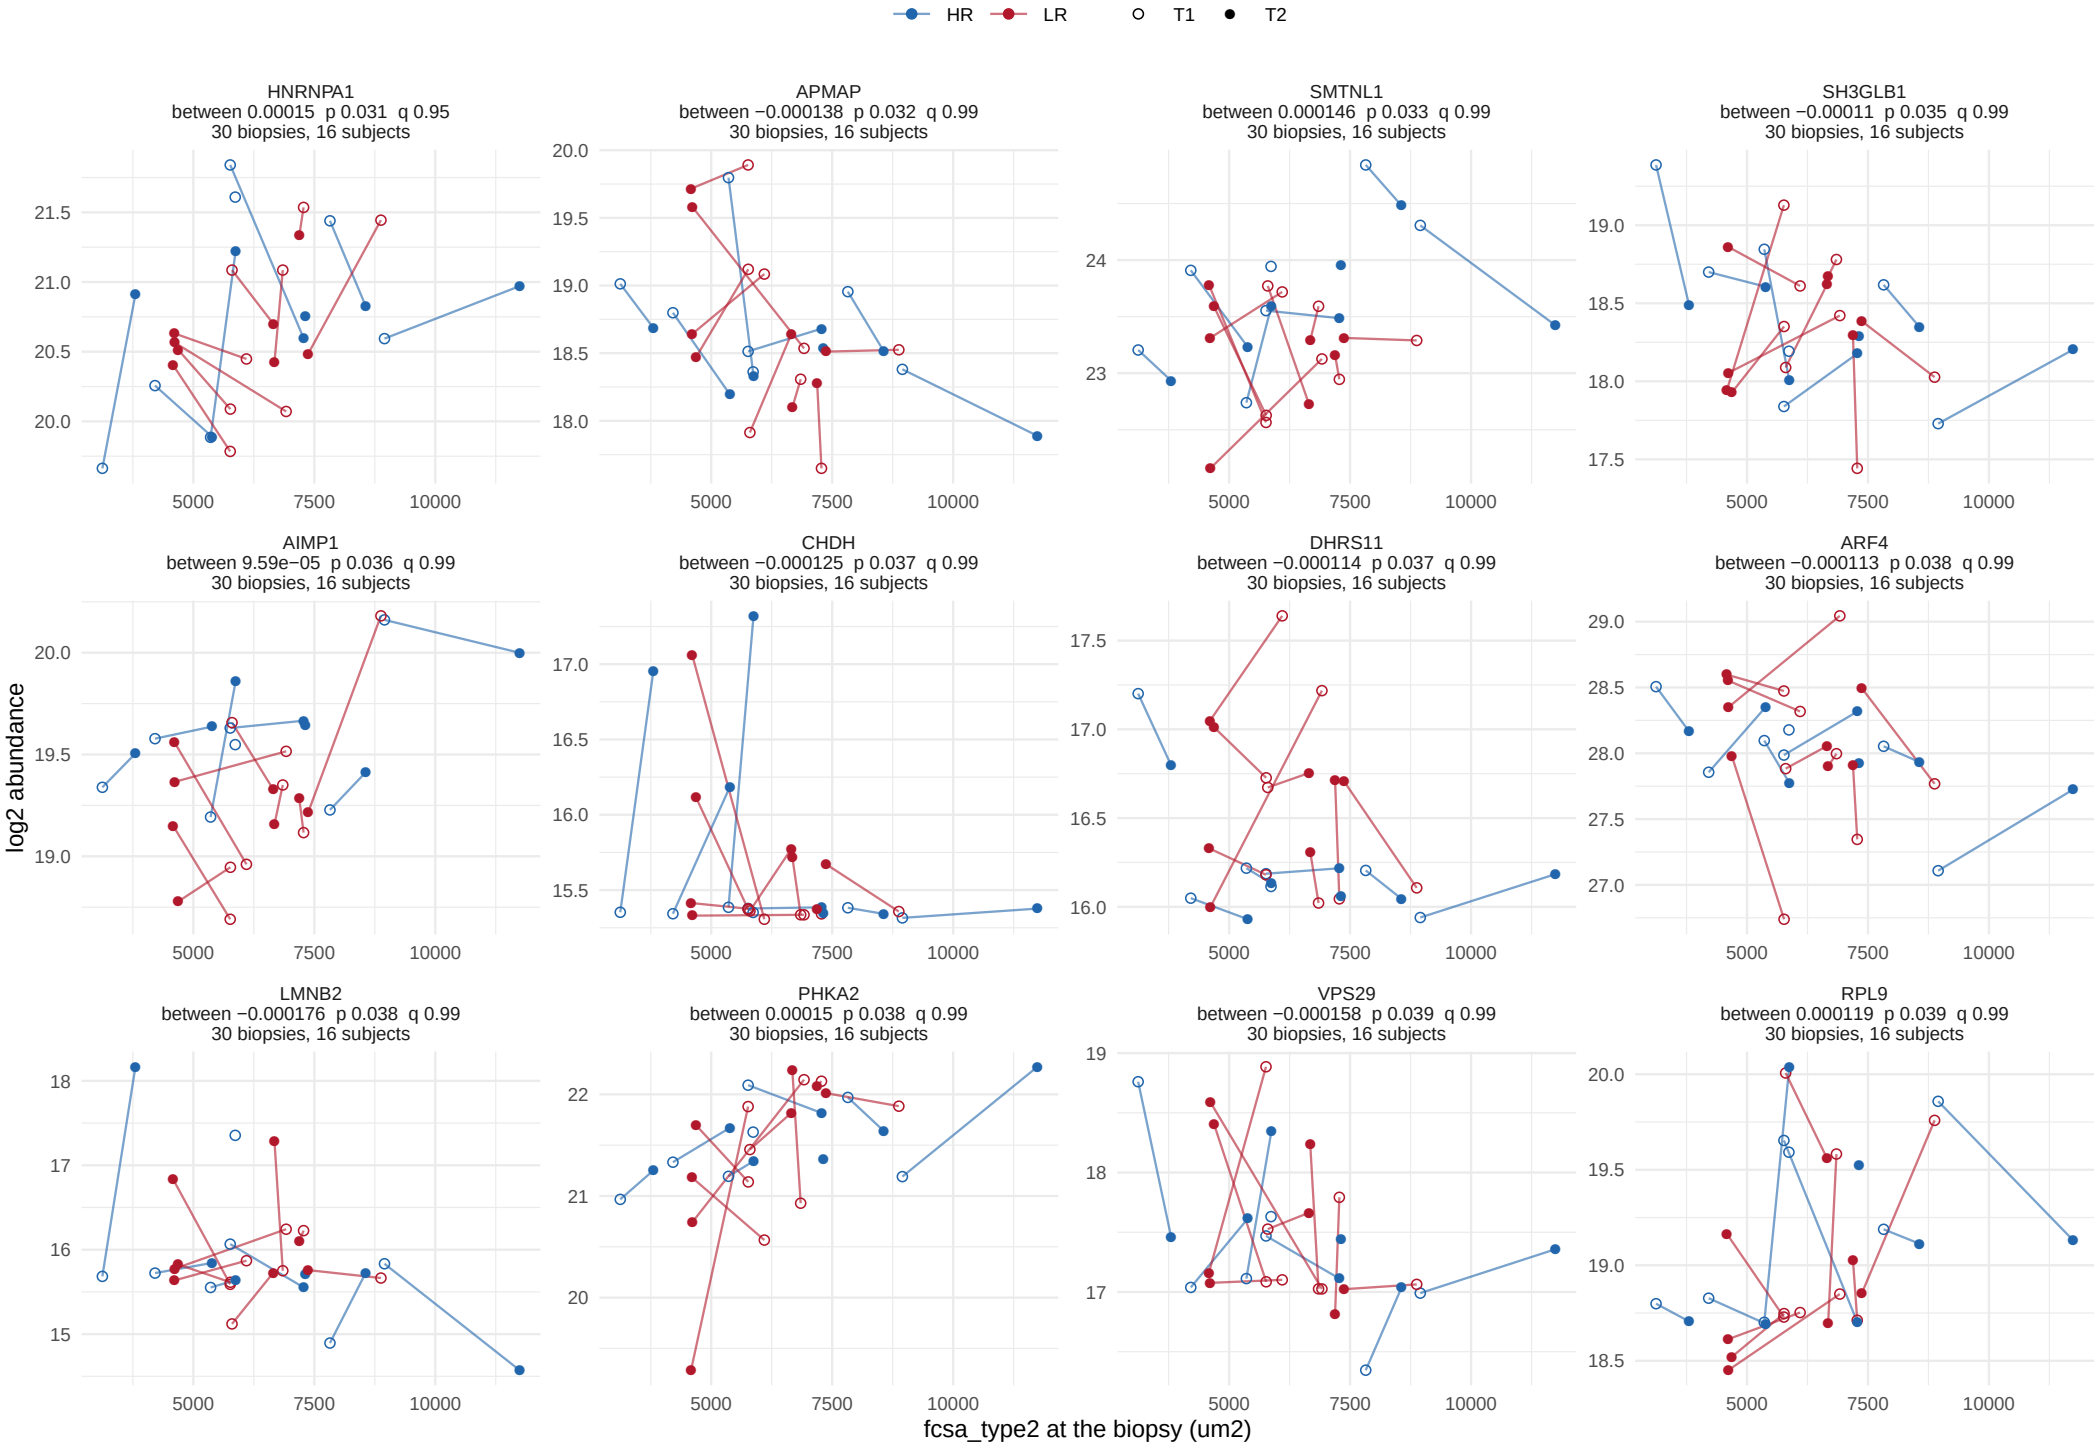

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_type2, between−person term

89 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 7 of 8.

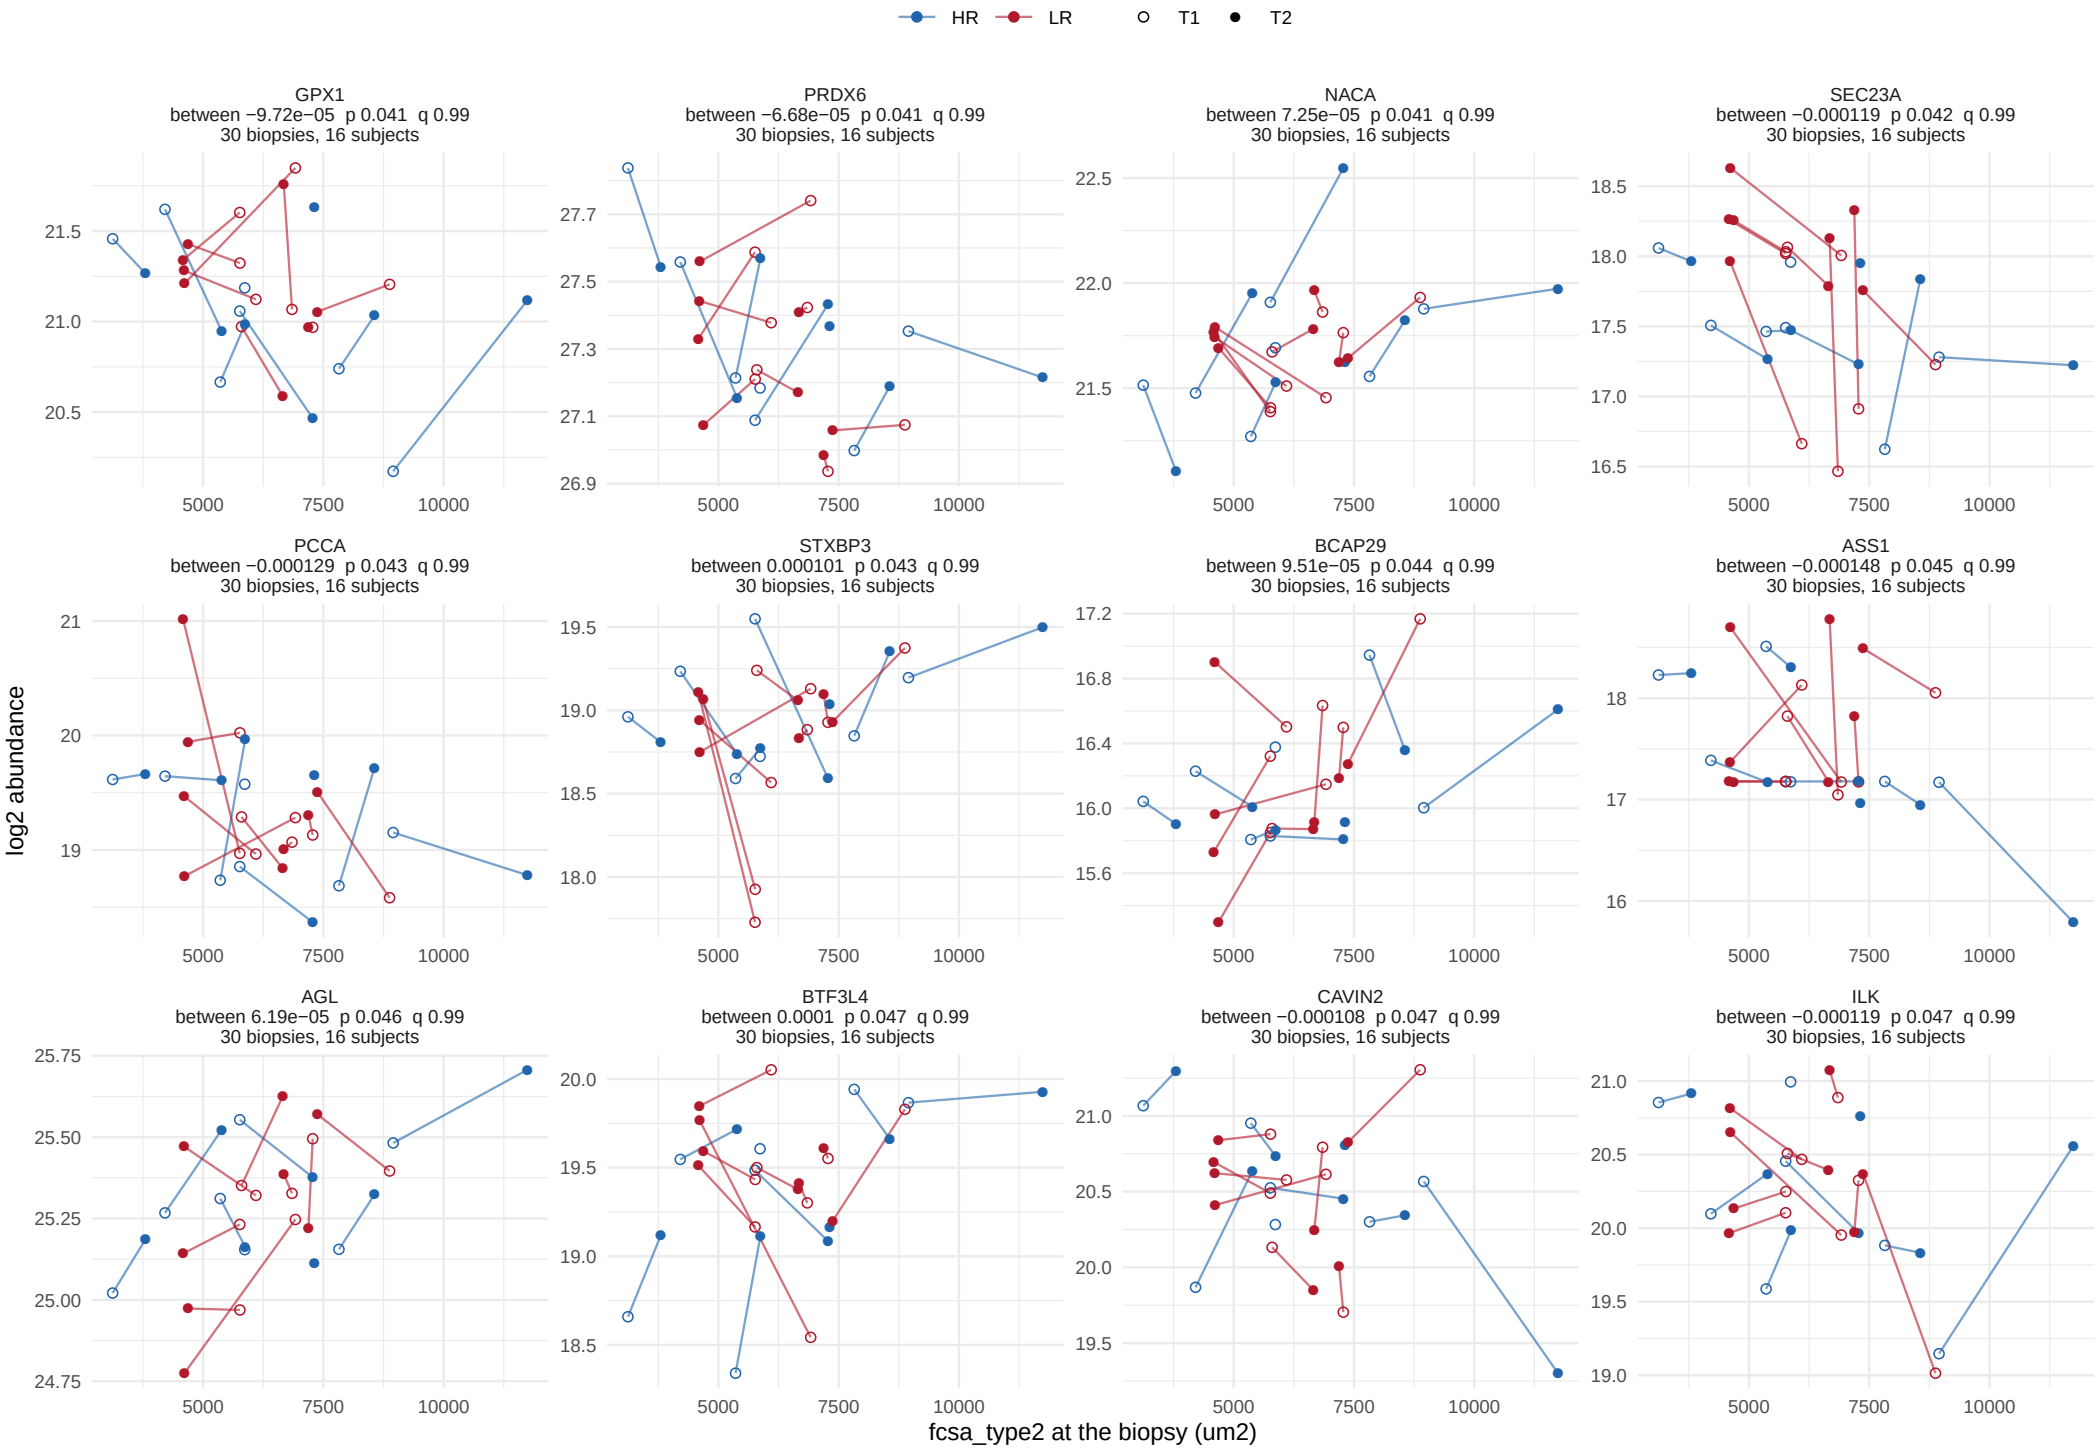

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_type2, between−person term


89 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 8 of 8.



limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

mcsa, within−person term


58 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 1 of 5.

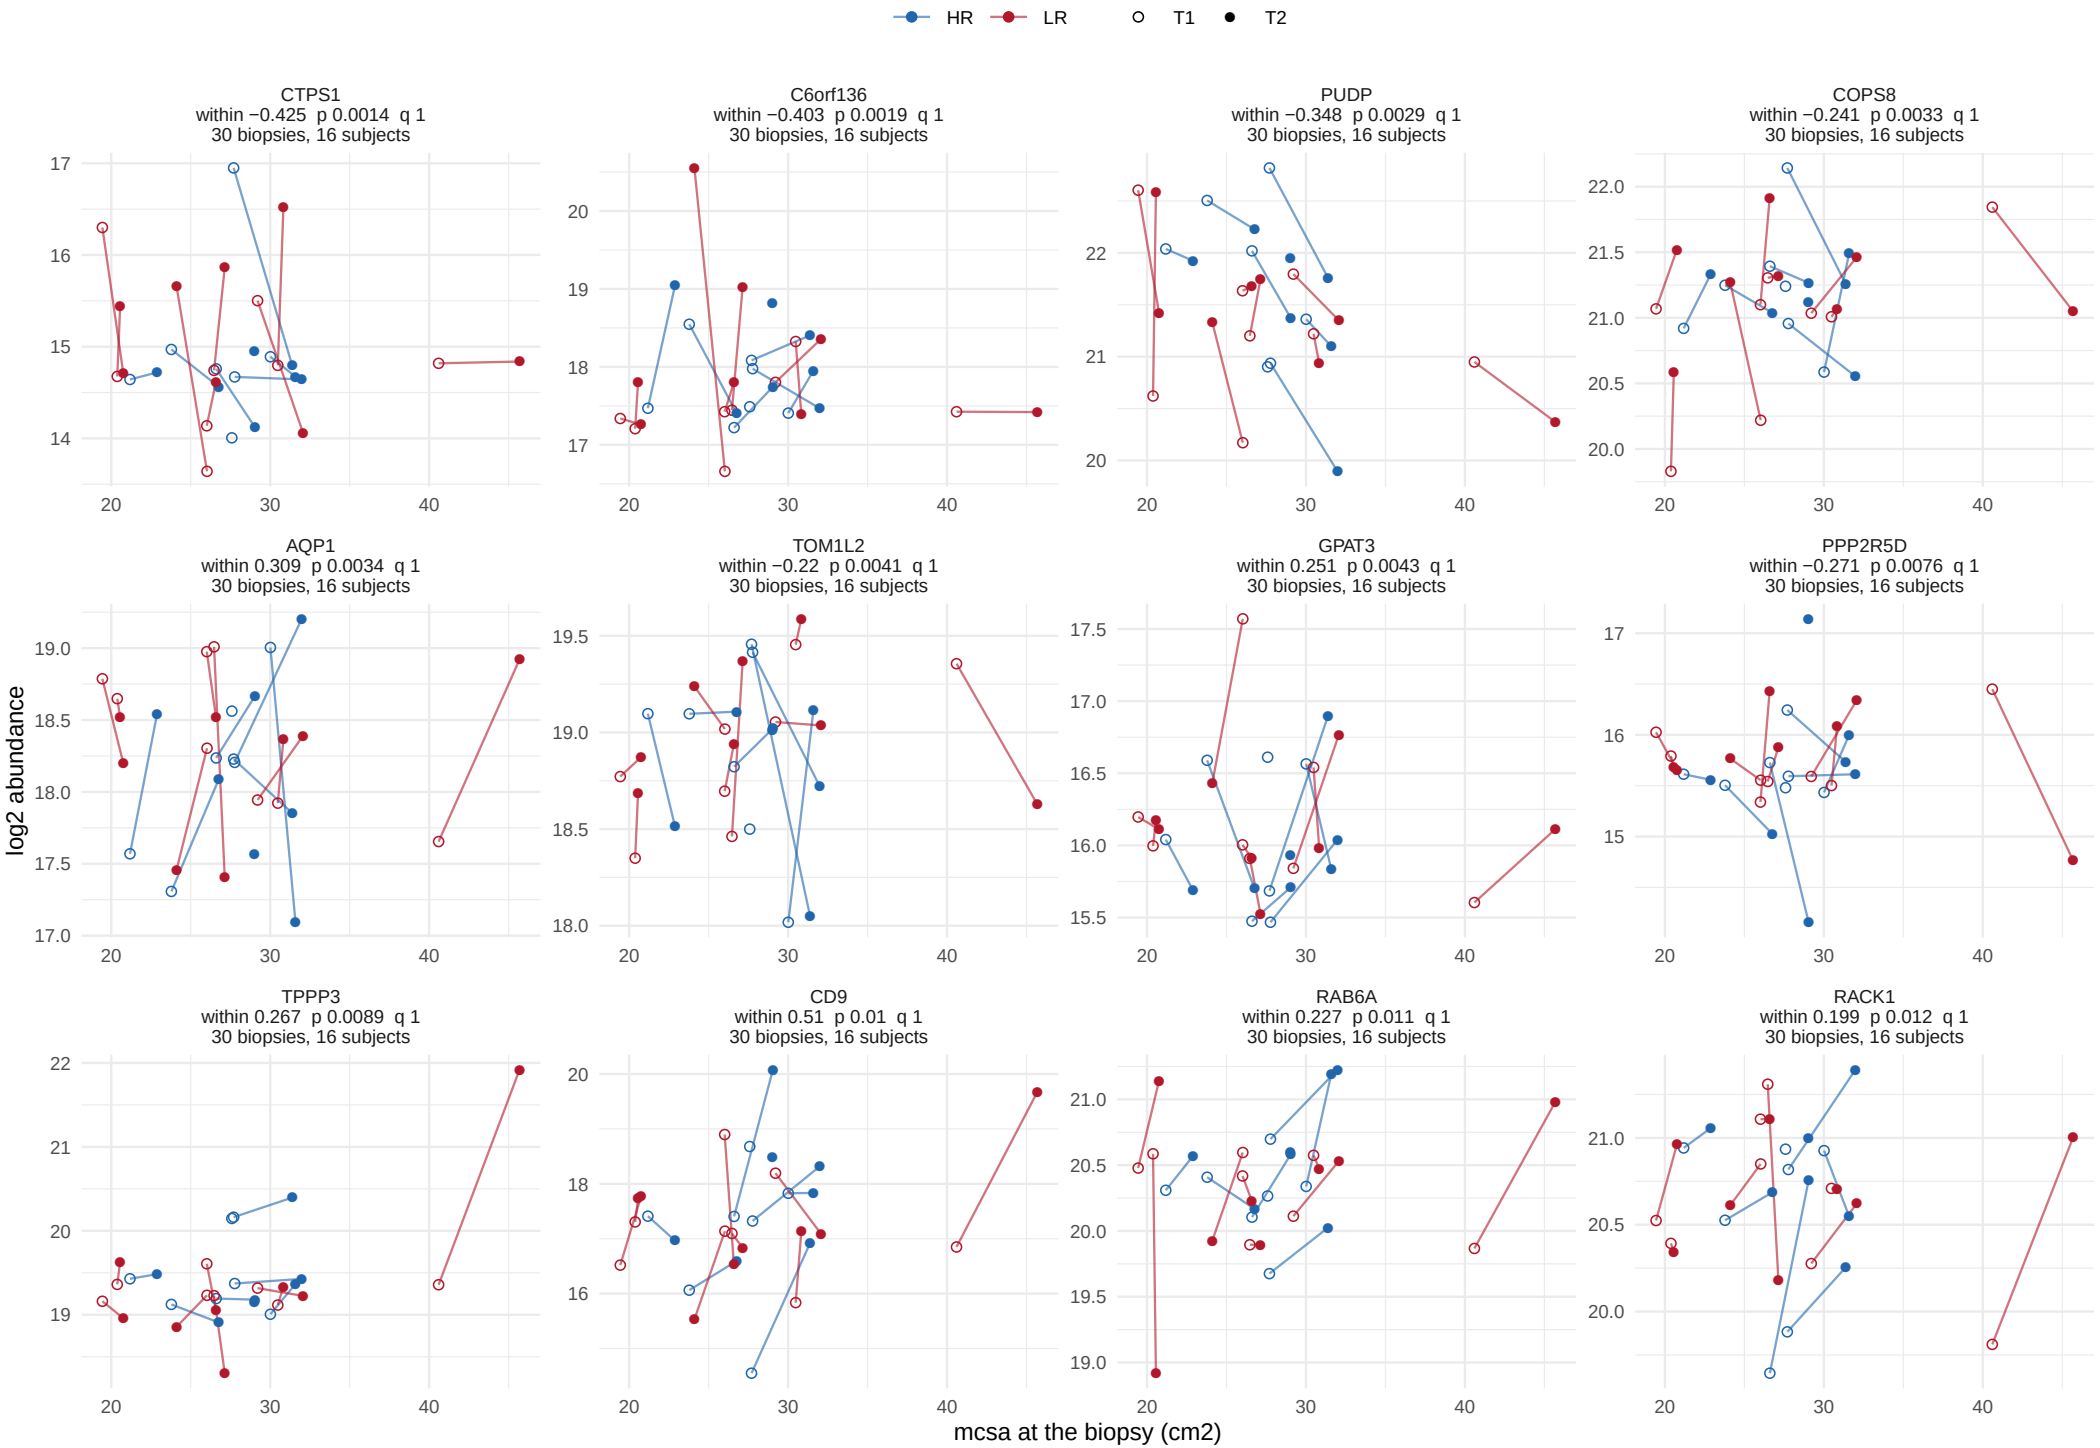

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

mcsa, within−person term


58 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 2 of 5.

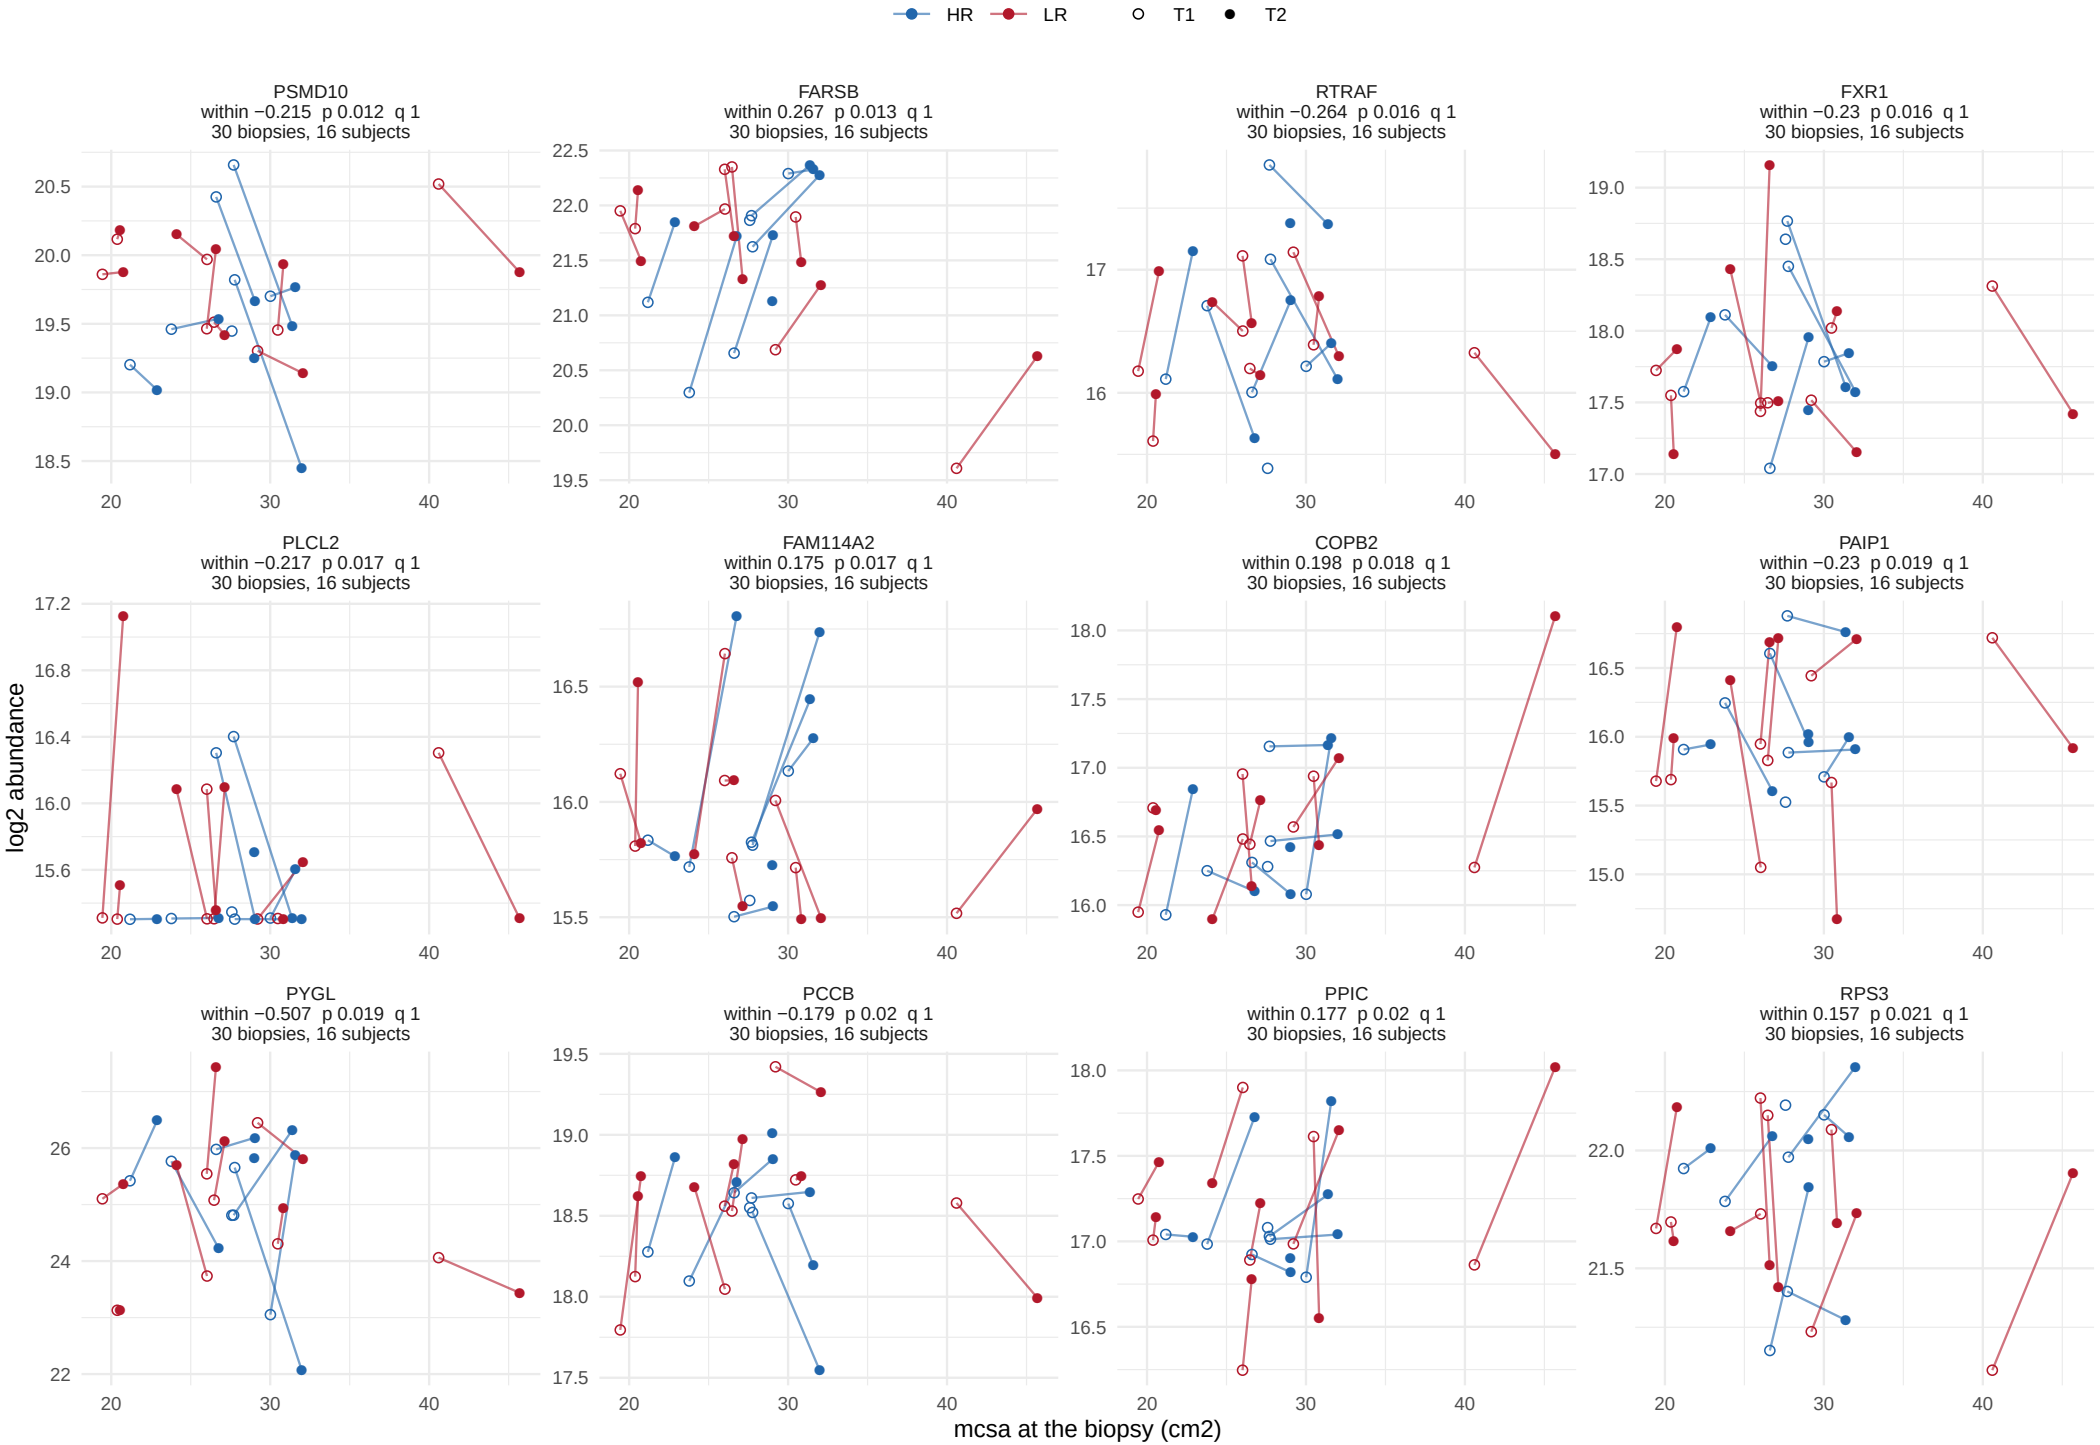

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

mcsa, within−person term


58 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 3 of 5.

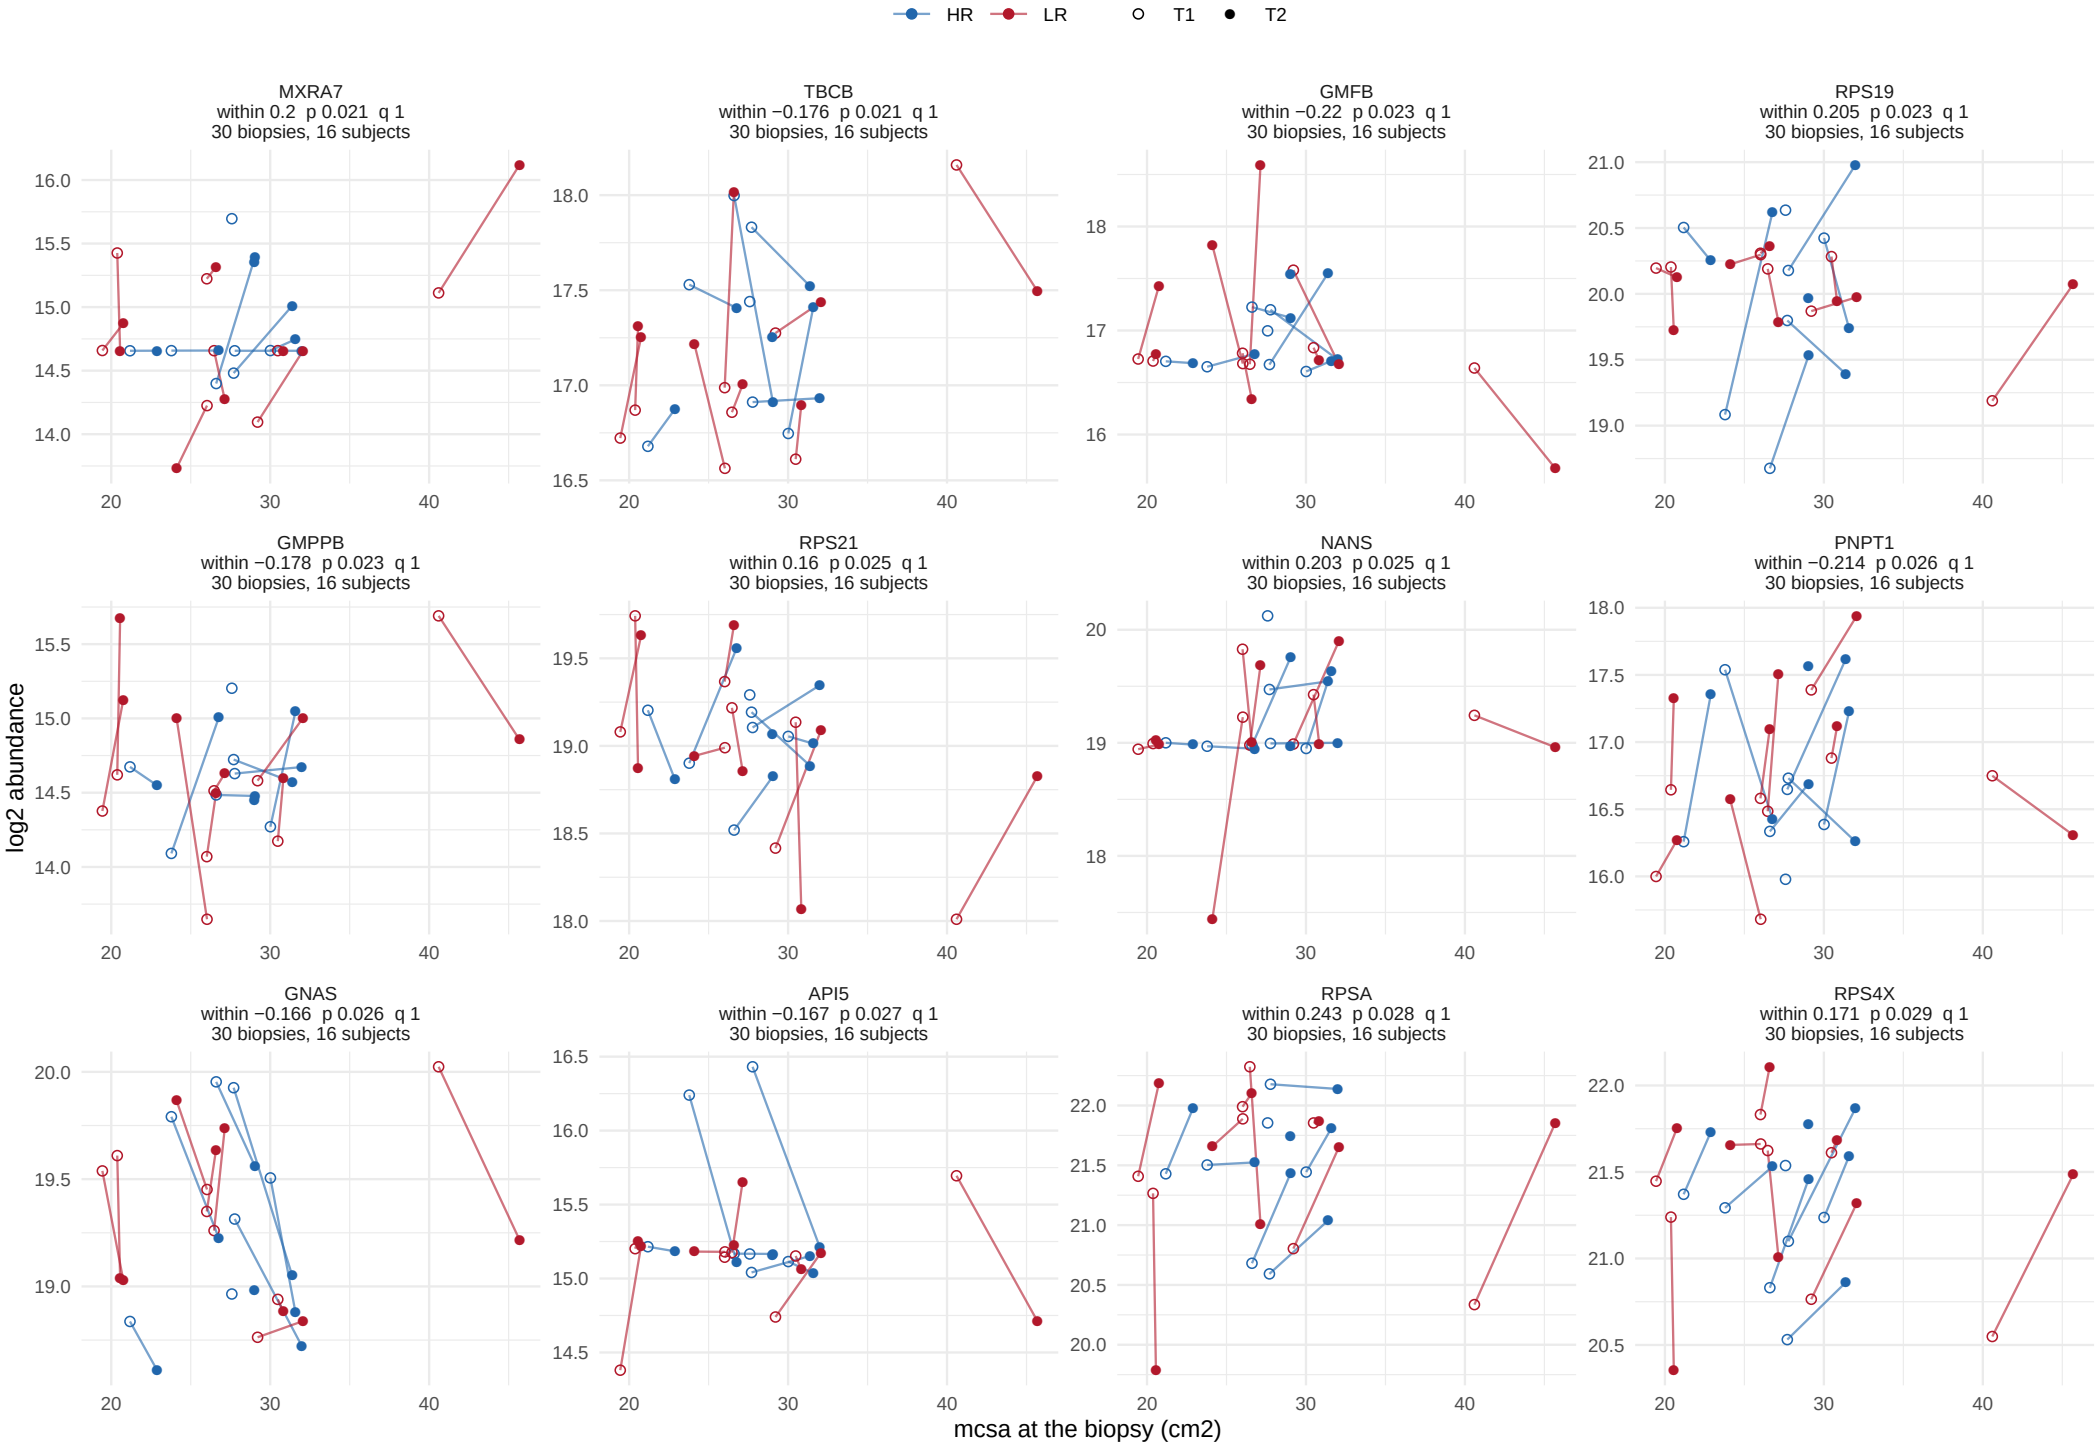

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

mcsa, within−person term


58 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 4 of 5.

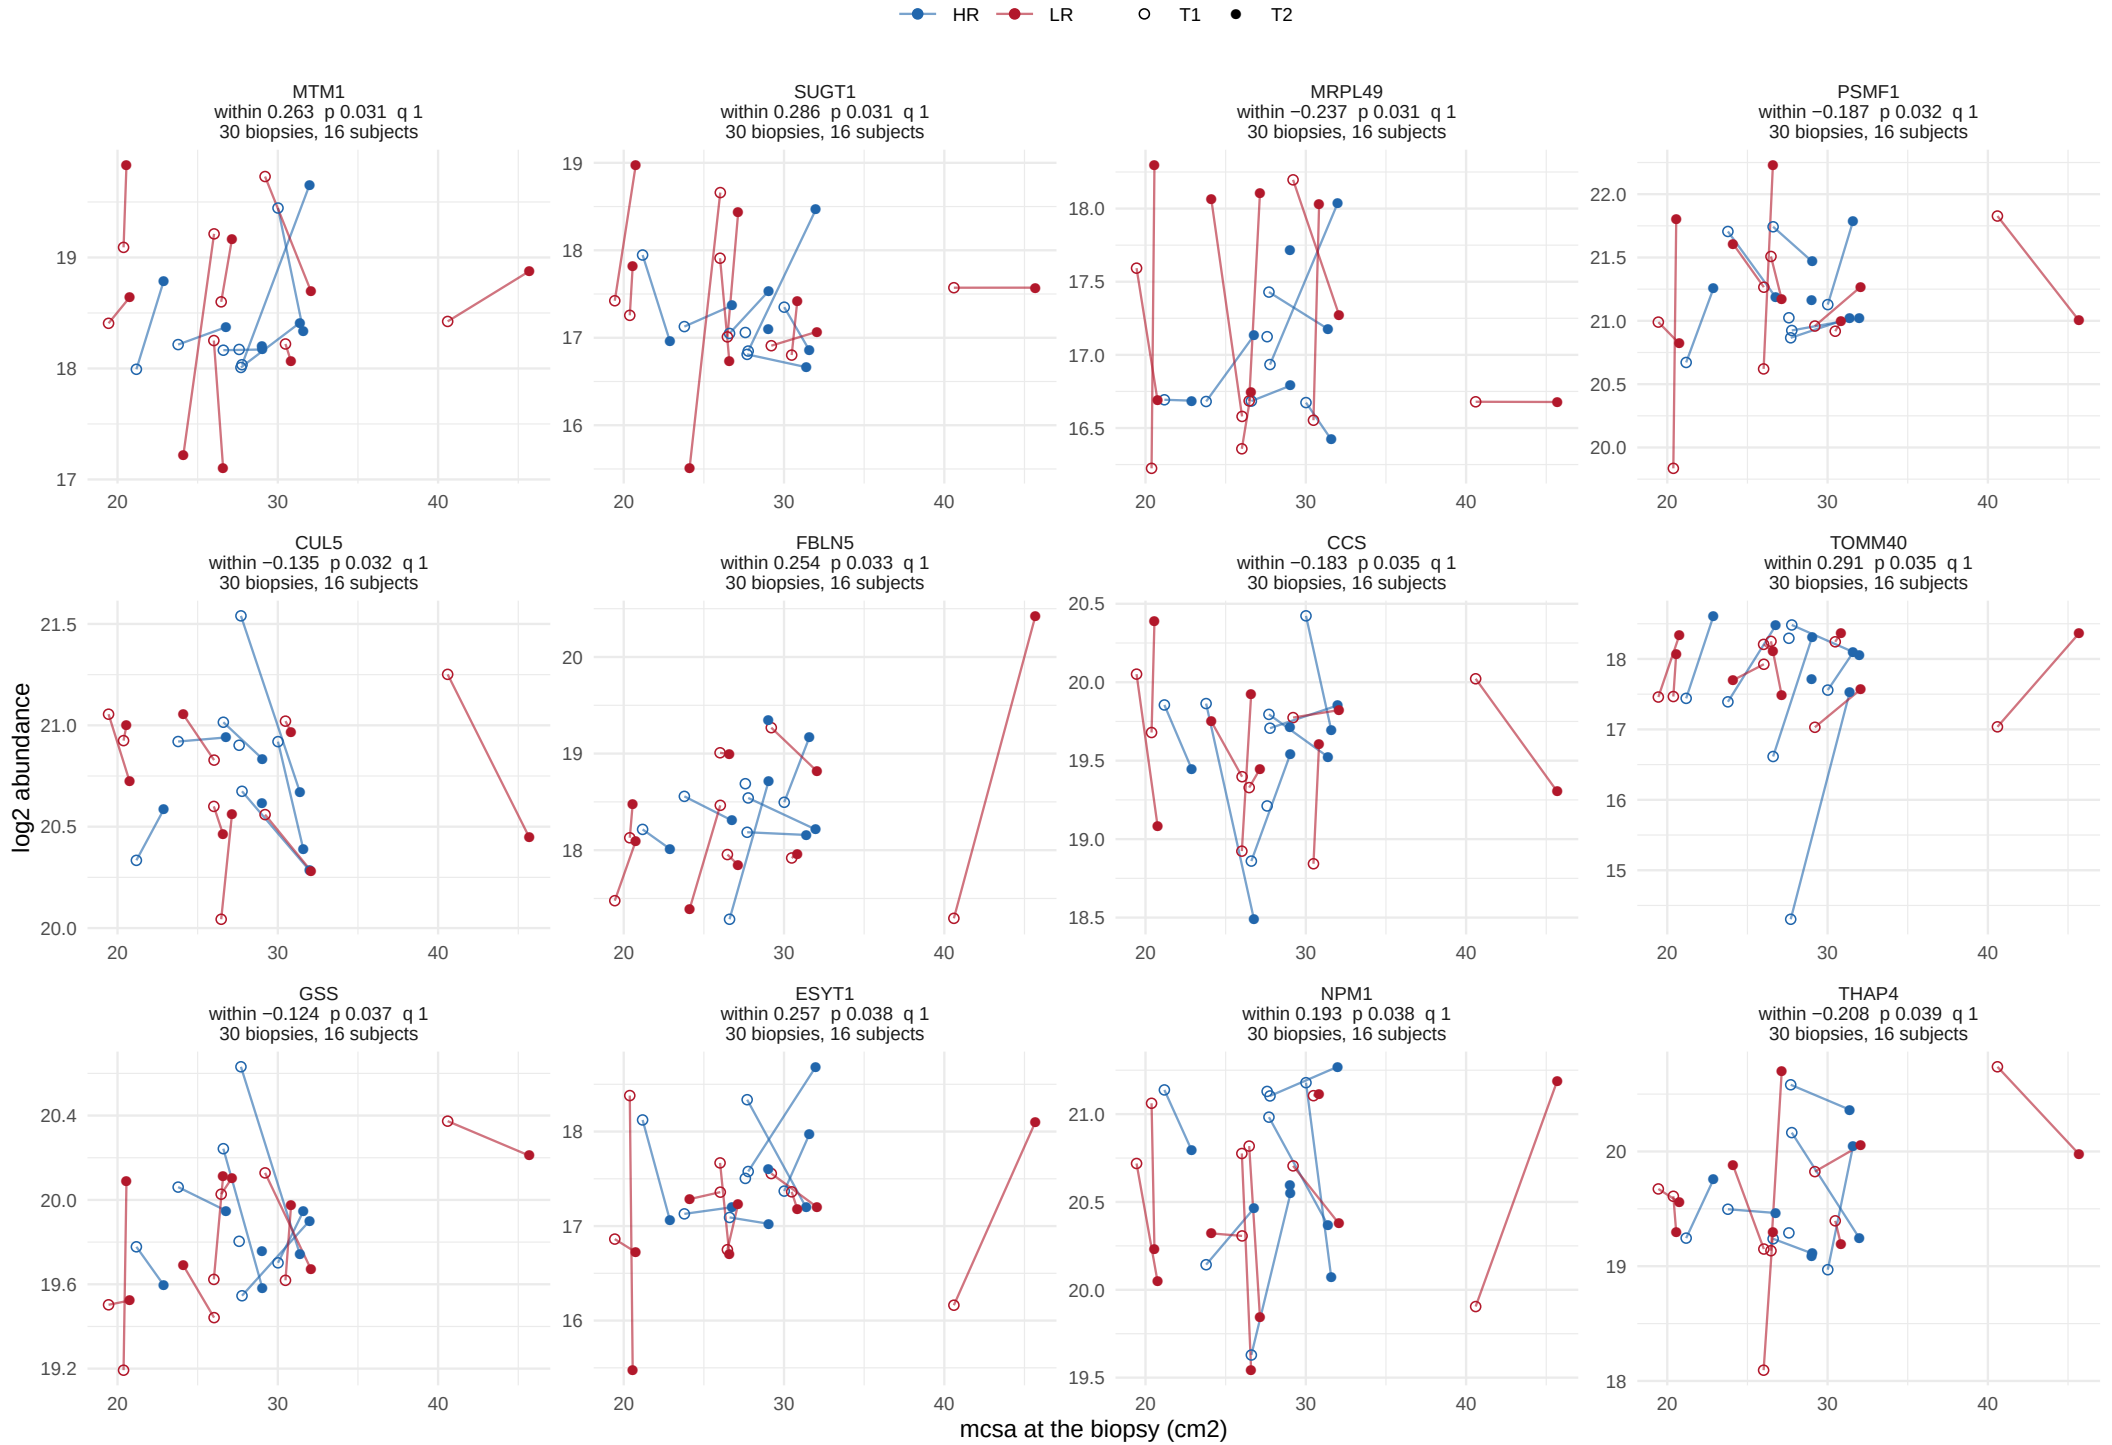

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

mcsa, within−person term

58 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 5 of 5.

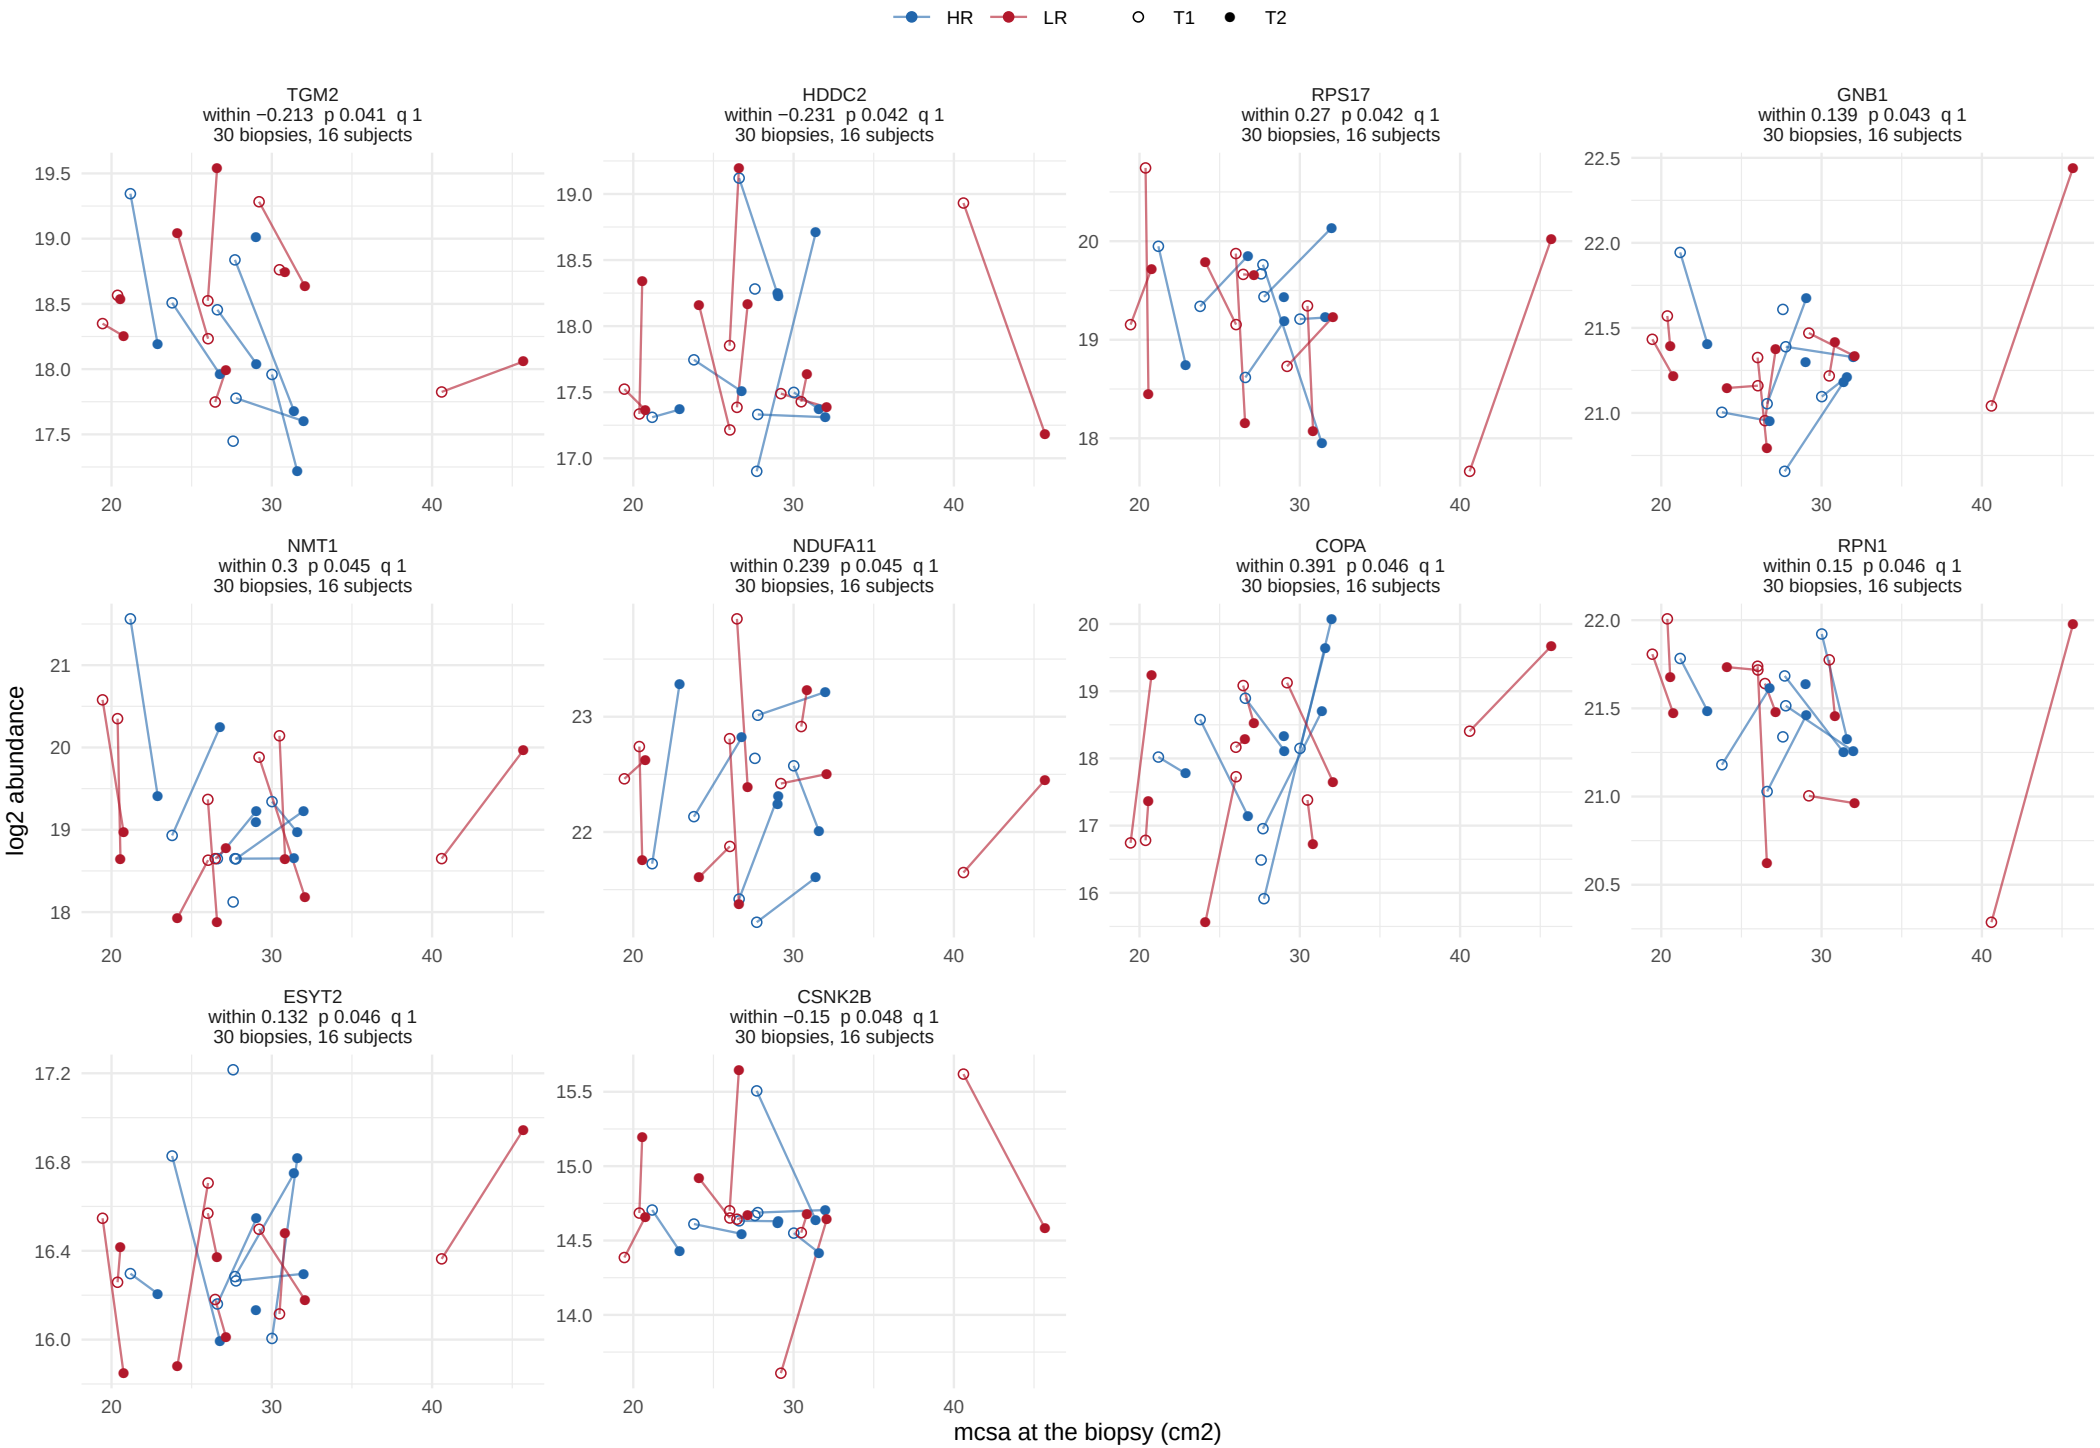

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

mcsa, between−person term


166 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 1 of 14.



limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

mcsa, between−person term


166 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 2 of 14.

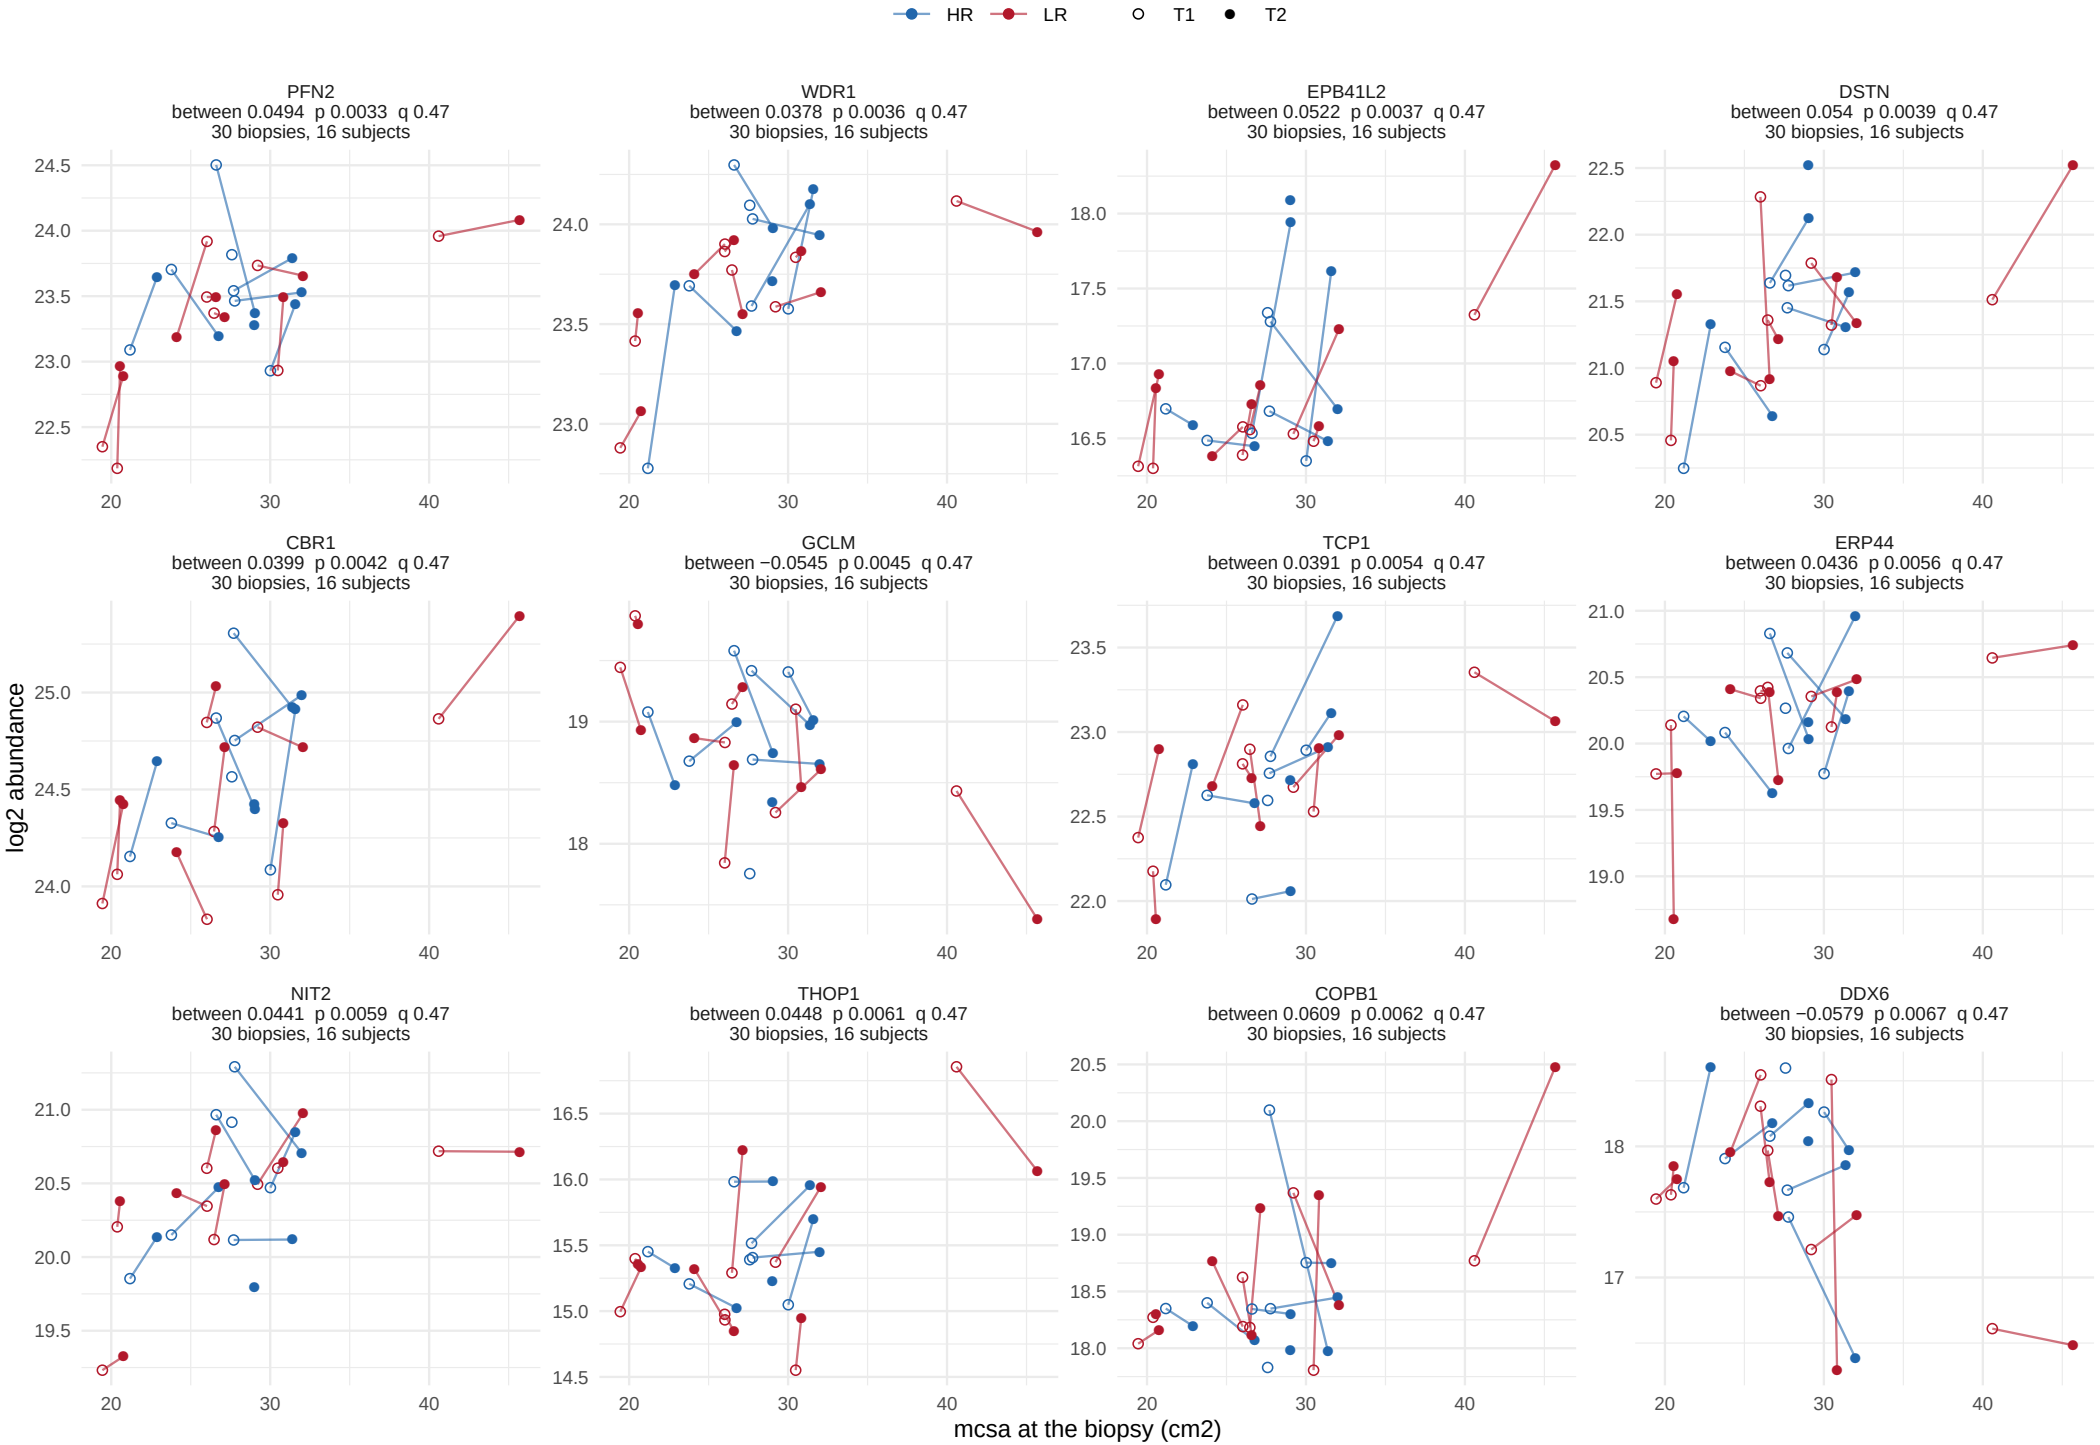

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

mcsa, between−person term


166 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 3 of 14.

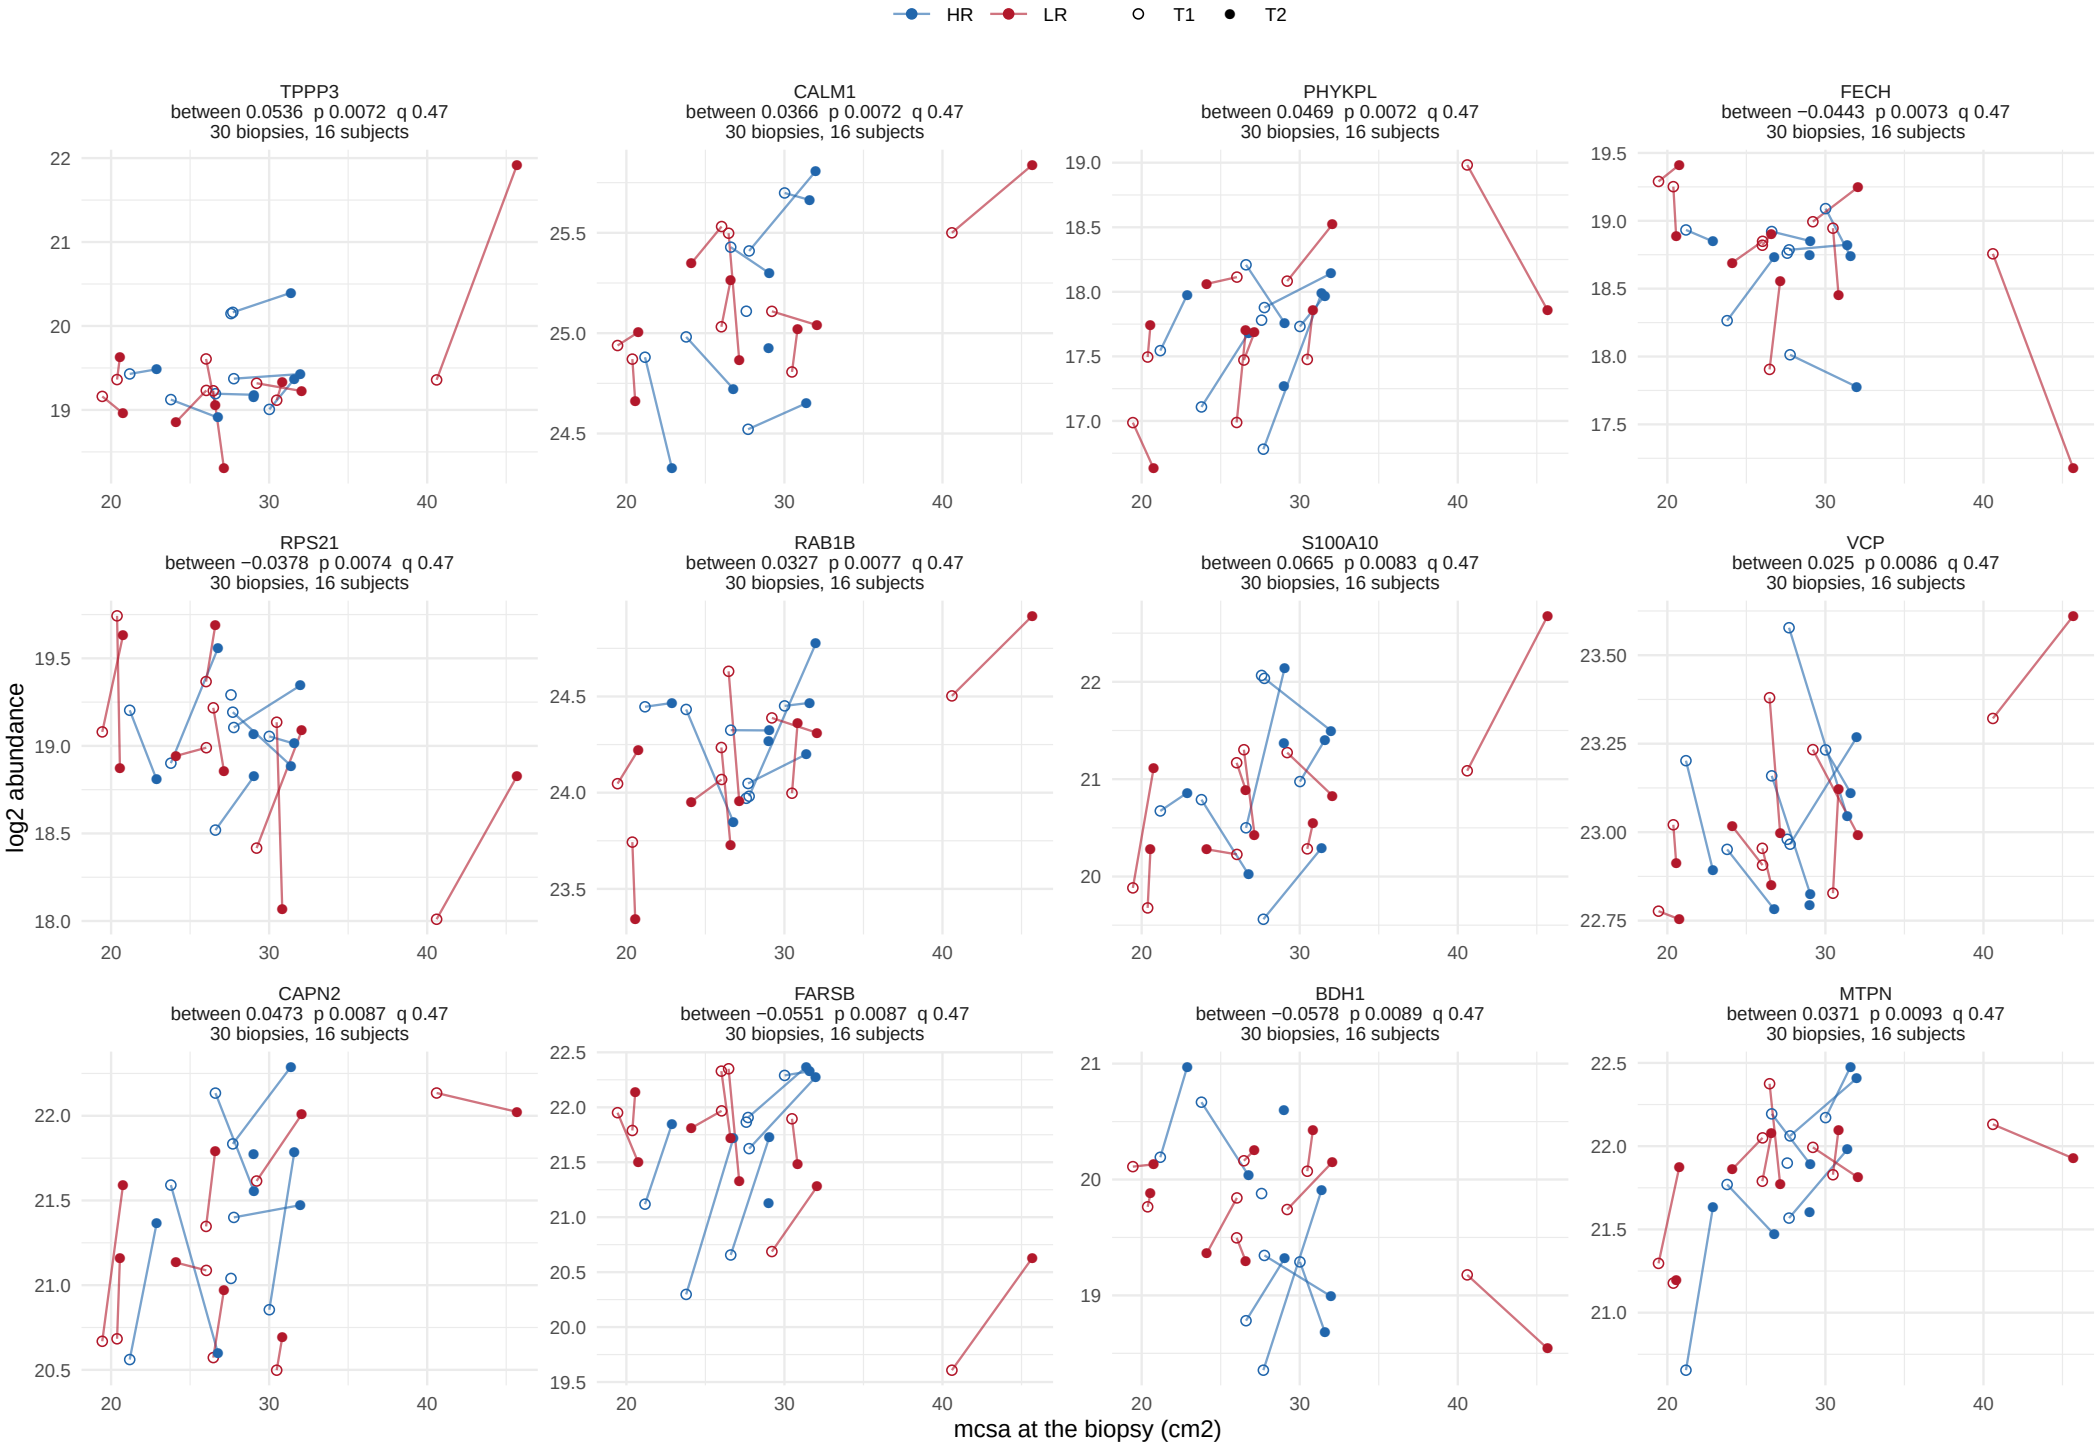

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

mcsa, between−person term


166 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 4 of 14.

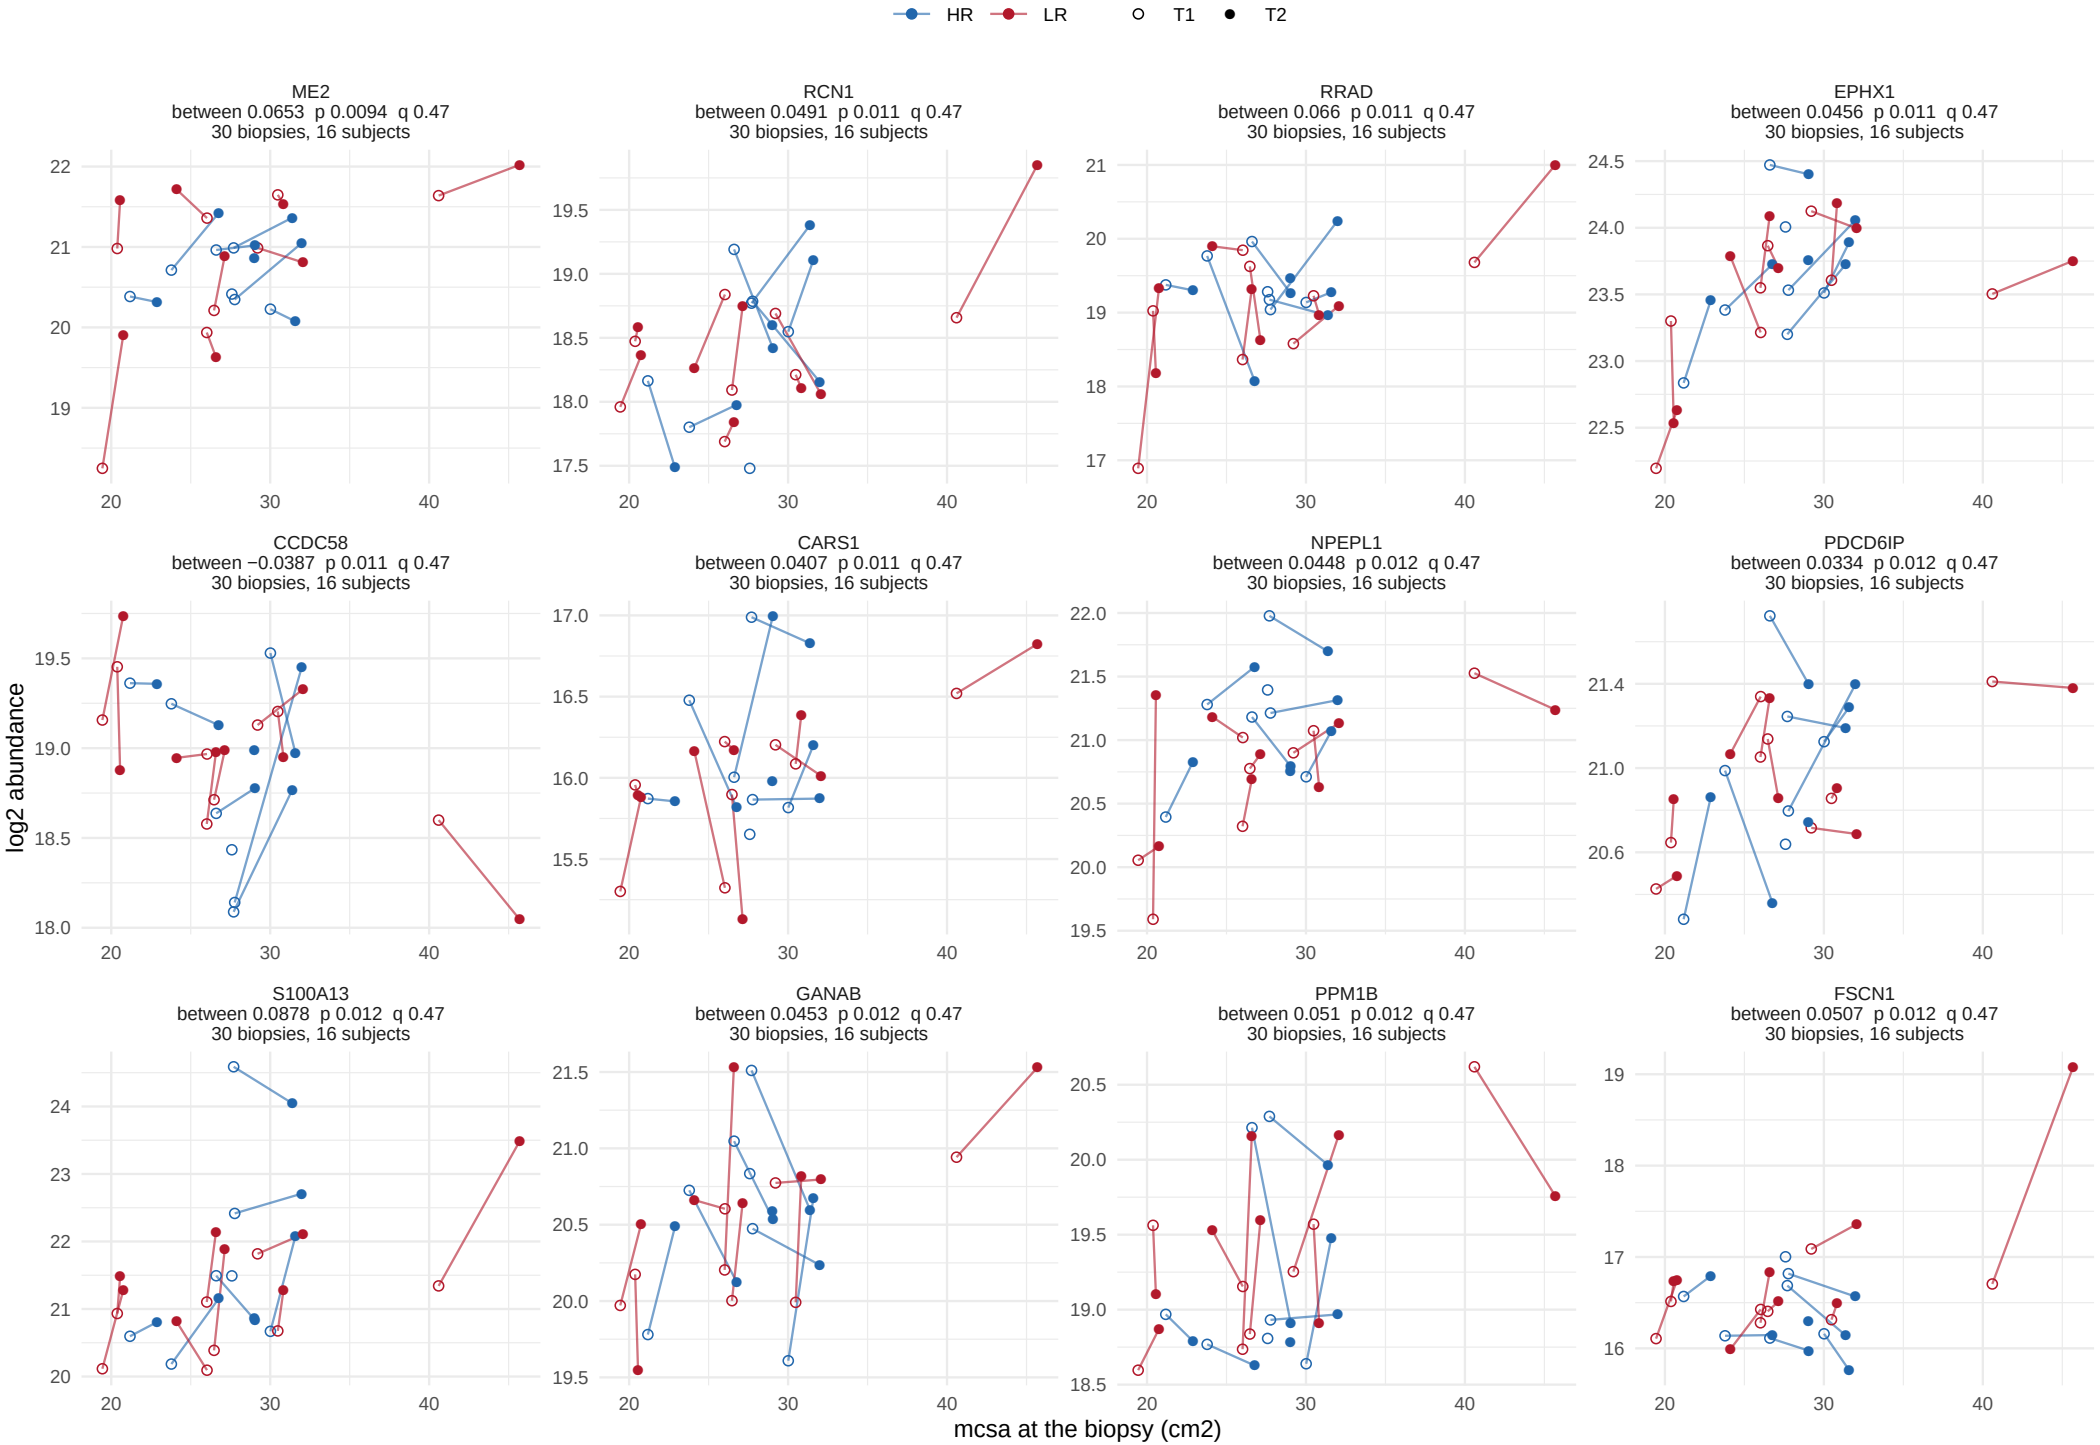

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

mcsa, between−person term


166 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 5 of 14.

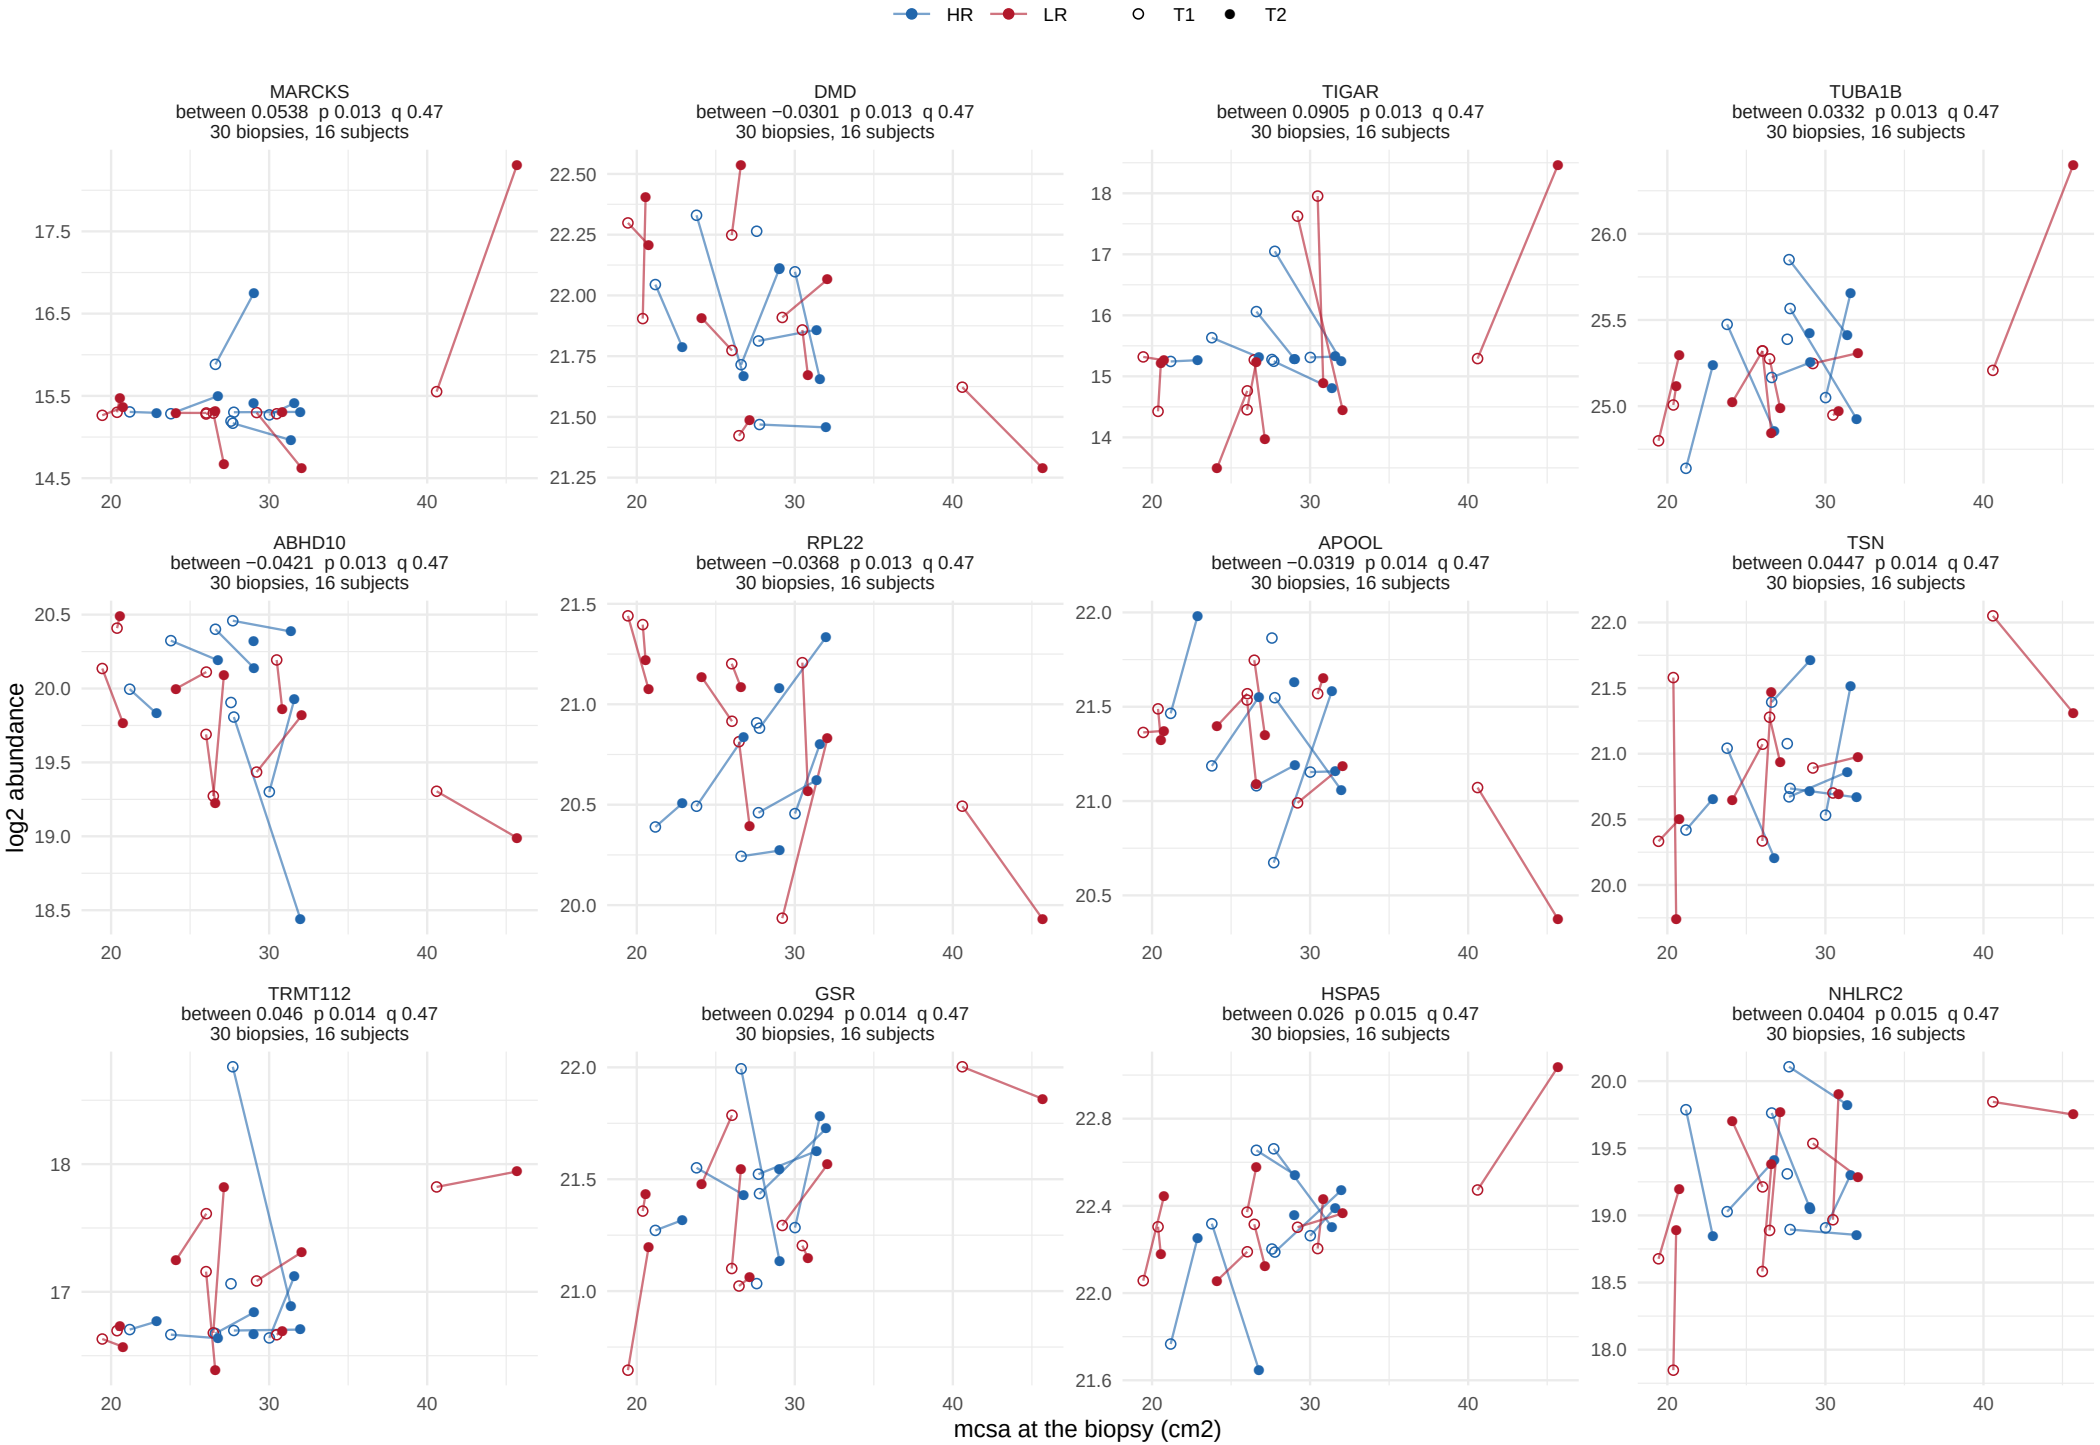

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

mcsa, between−person term


166 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 6 of 14.

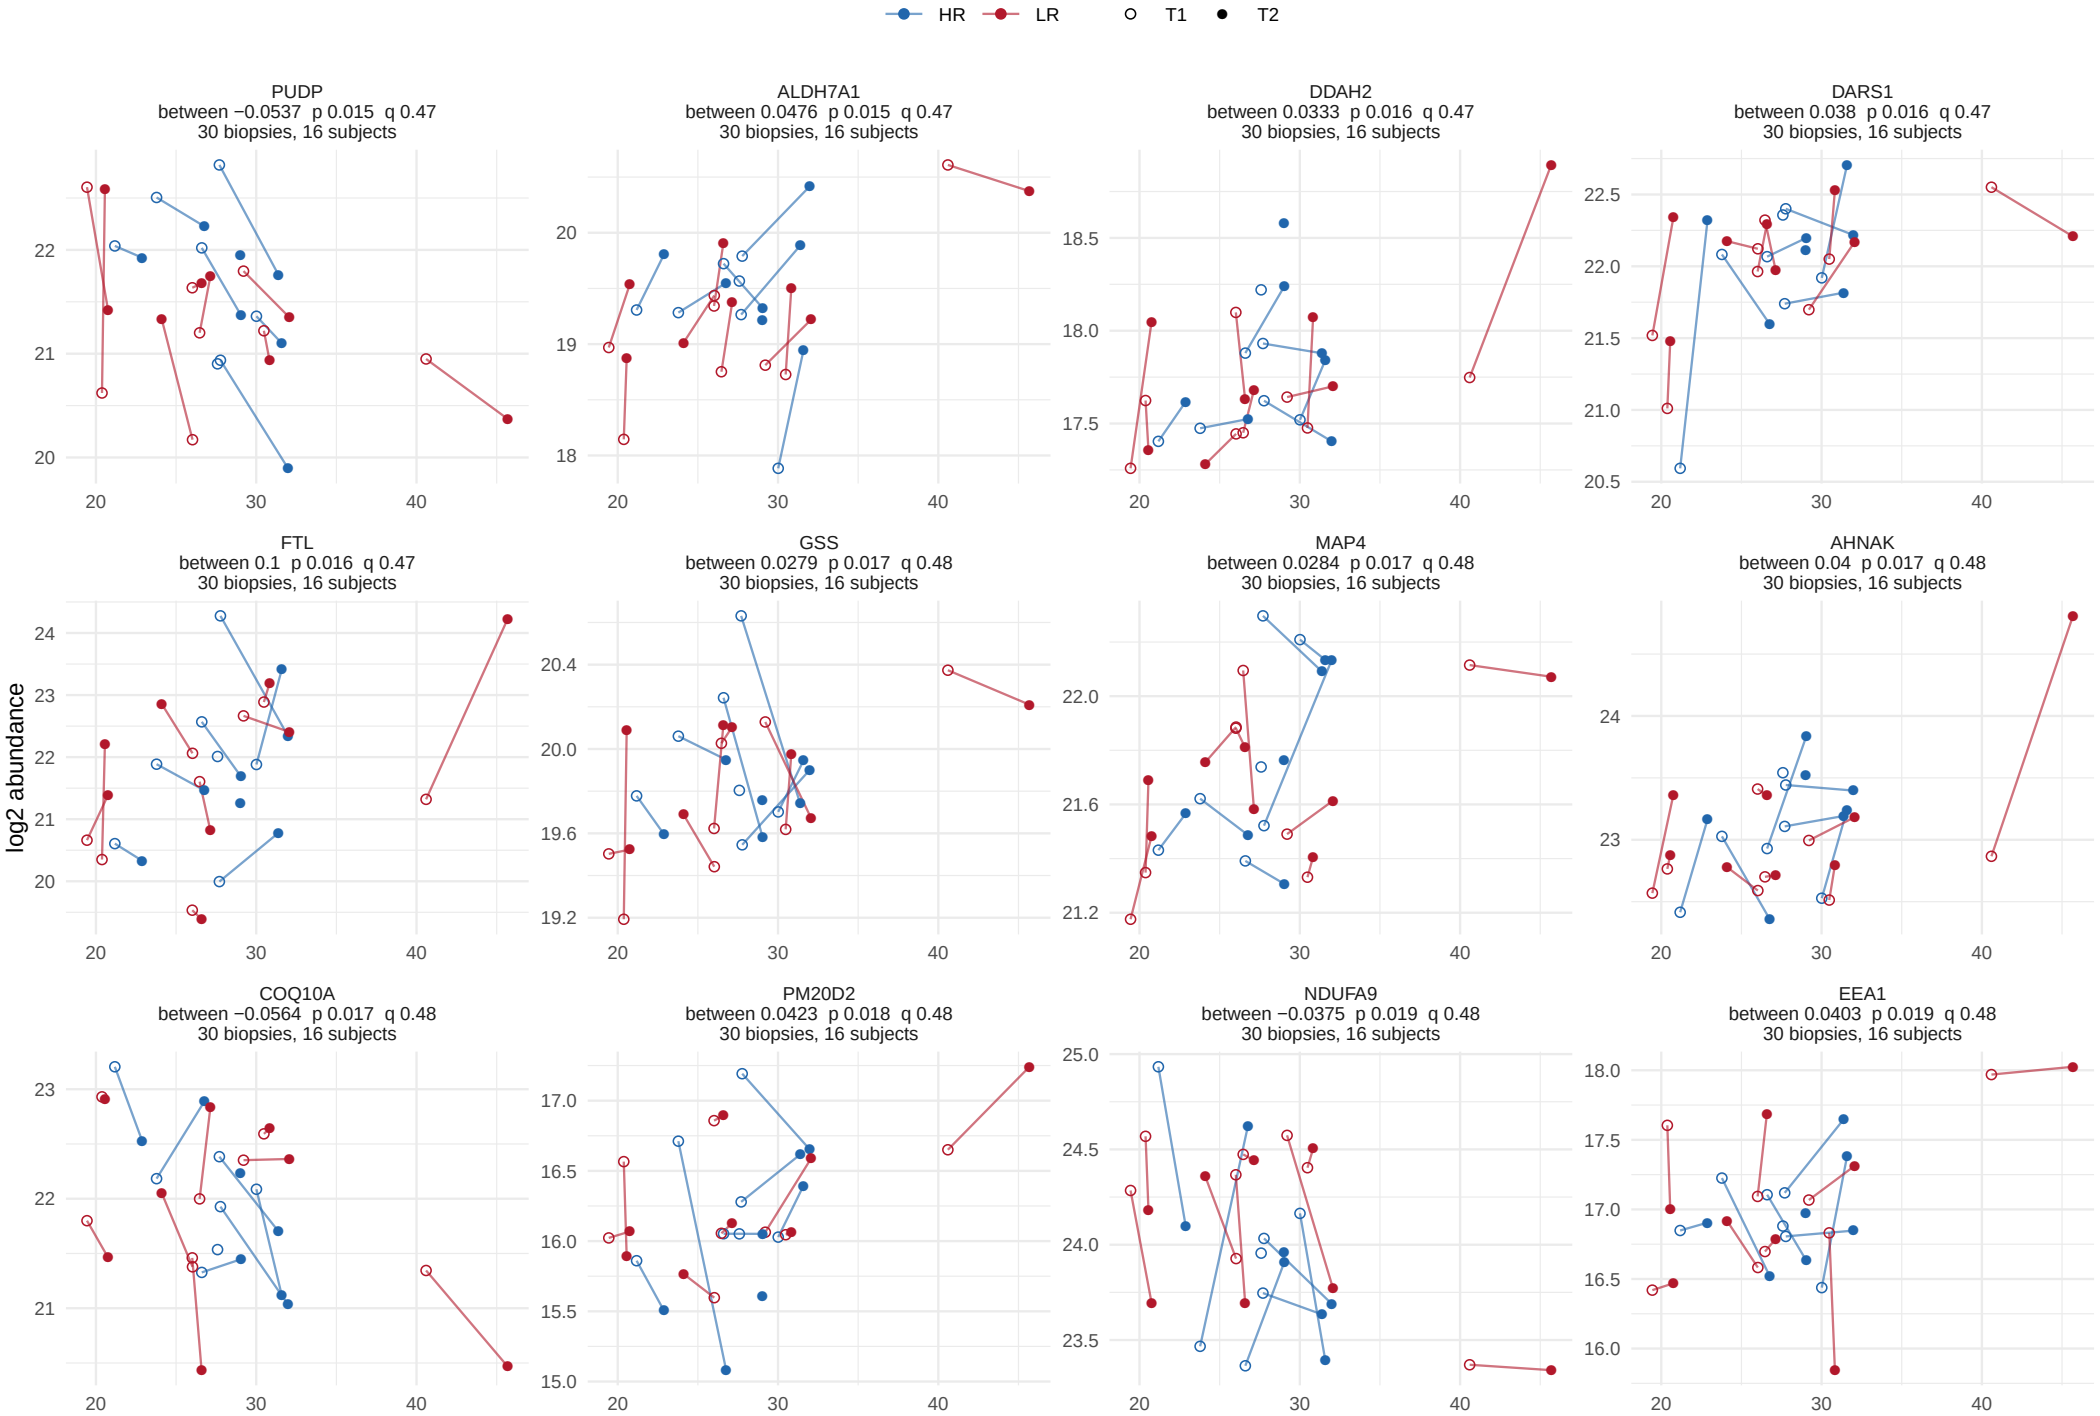

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

mcsa, between−person term

166 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 7 of 14.

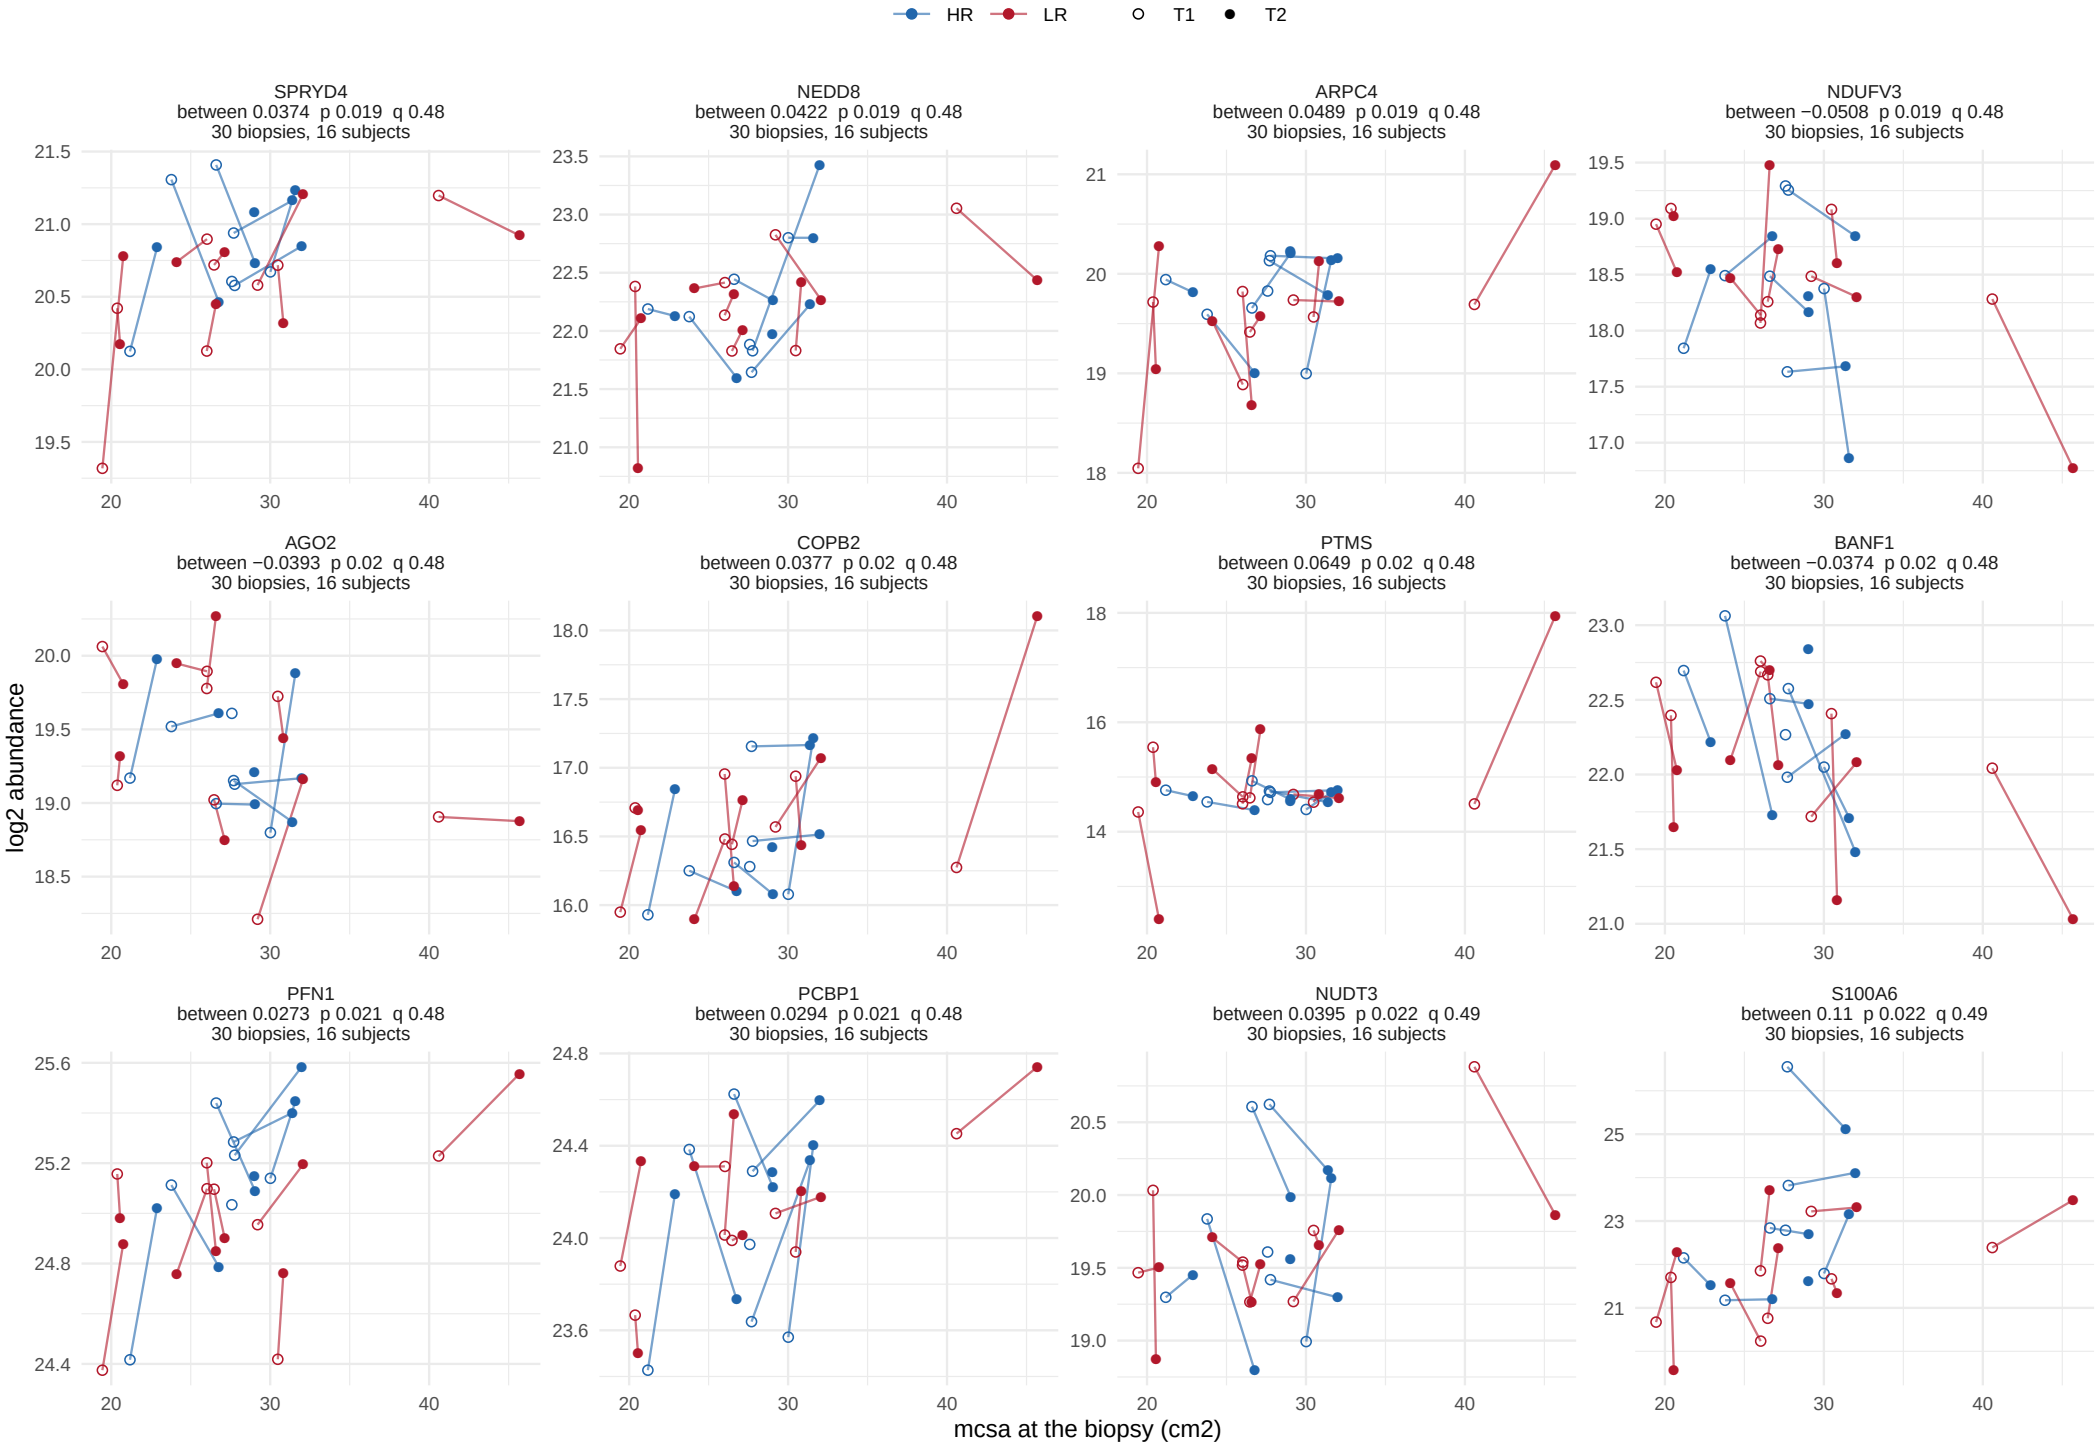

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

mcsa, between−person term


166 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 8 of 14.



limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

mcsa, between−person term


166 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 9 of 14.

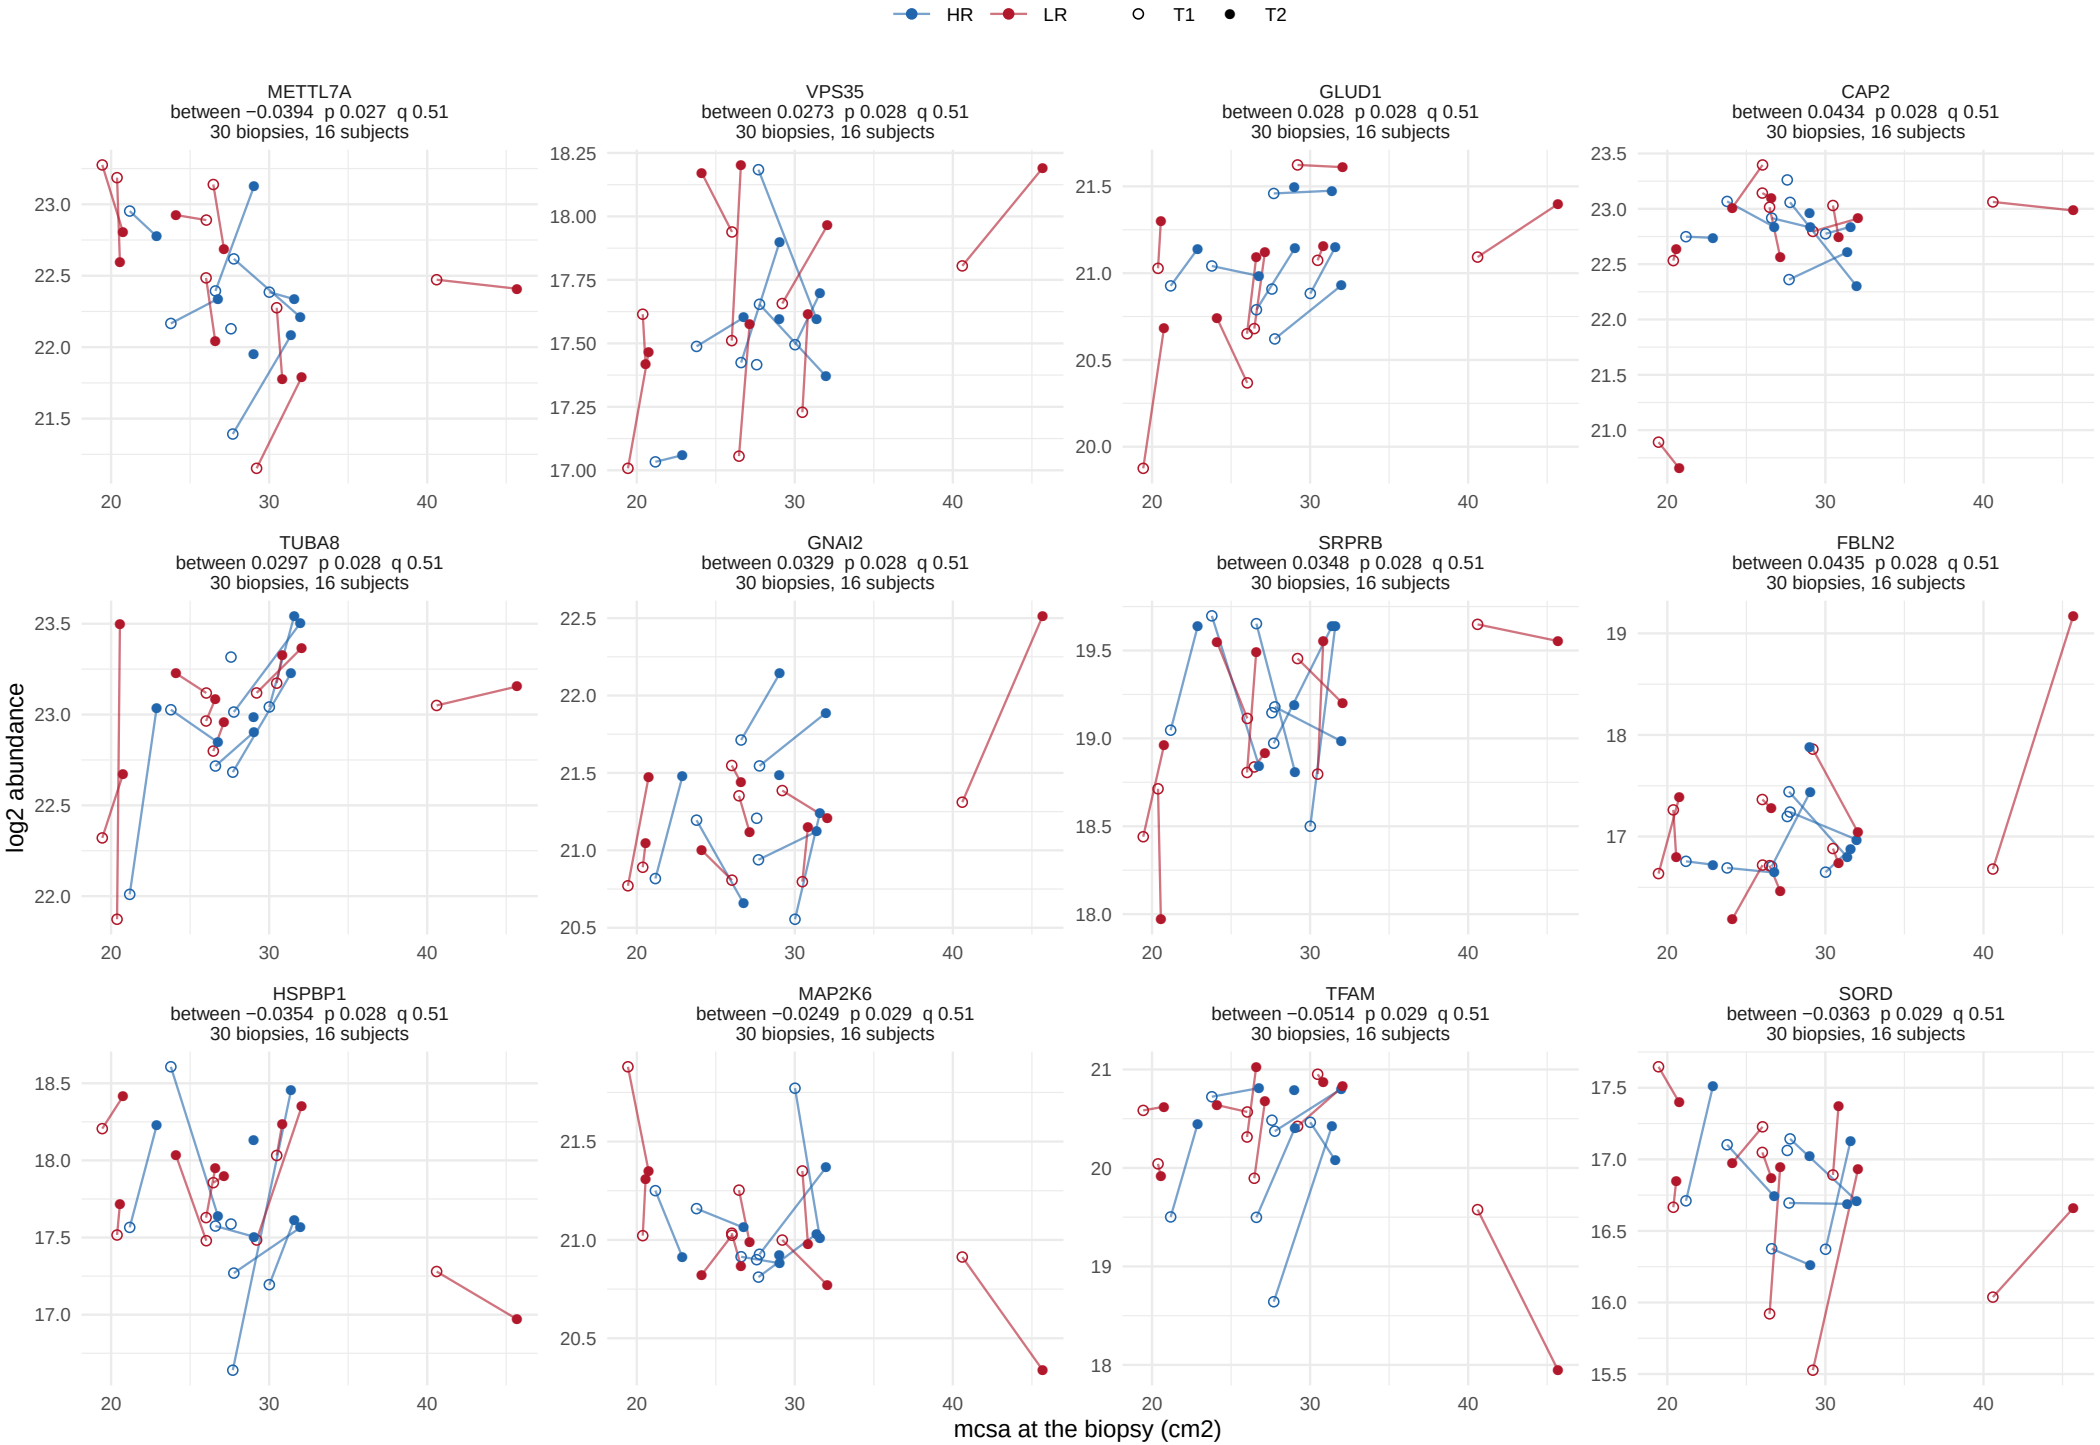

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

mcsa, between−person term


166 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 10 of 14.

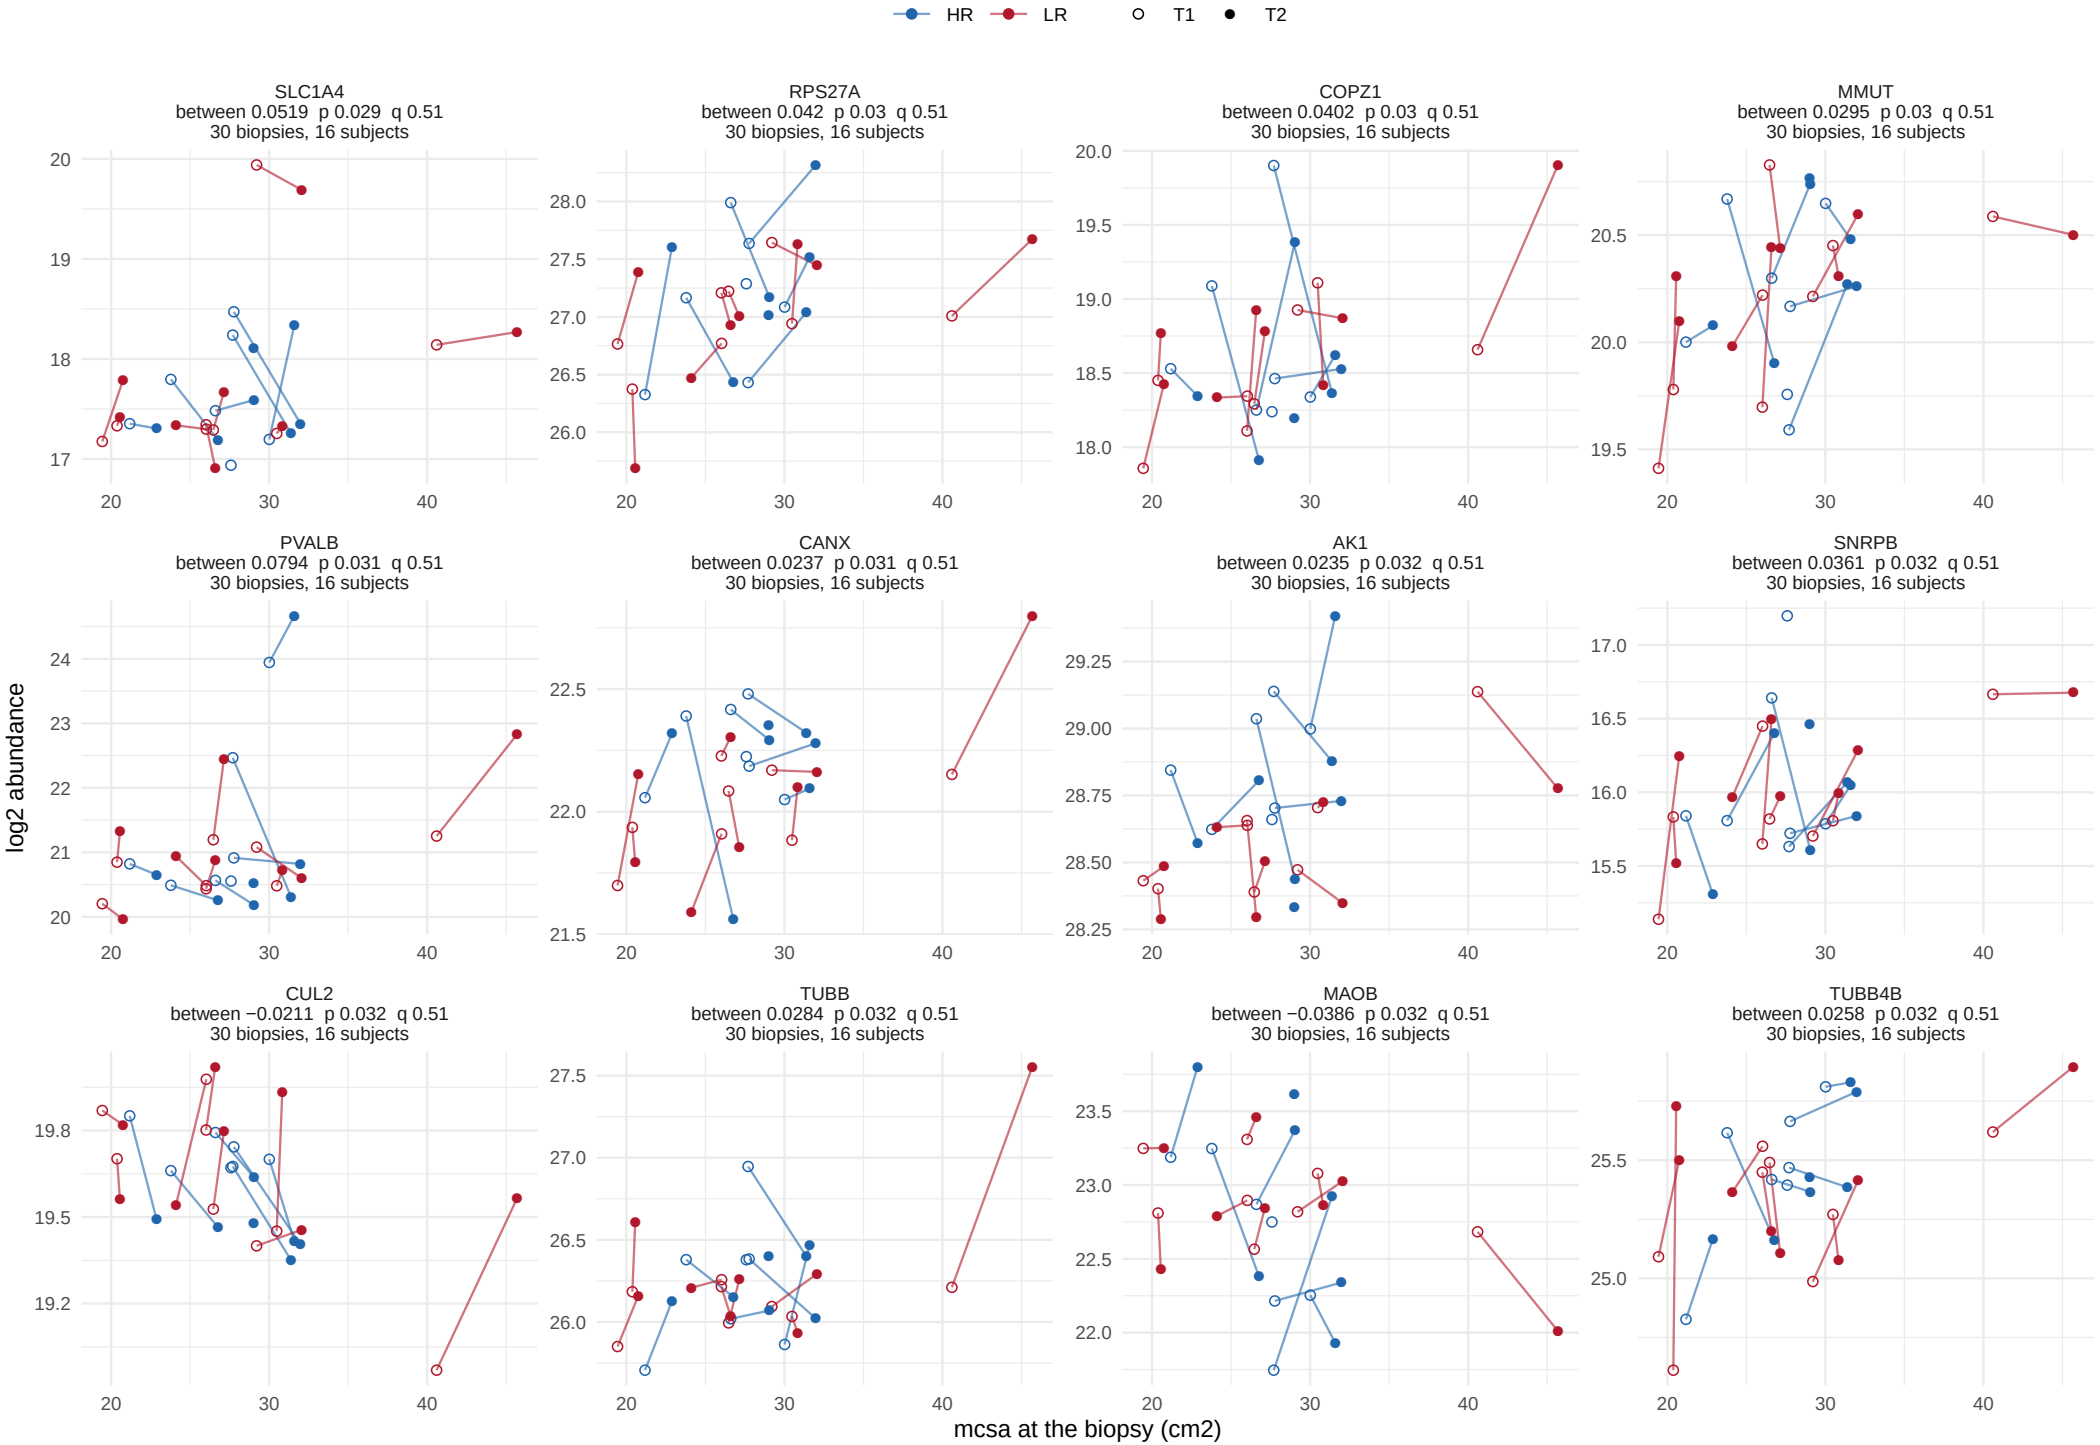

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

mcsa, between−person term


166 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 11 of 14.

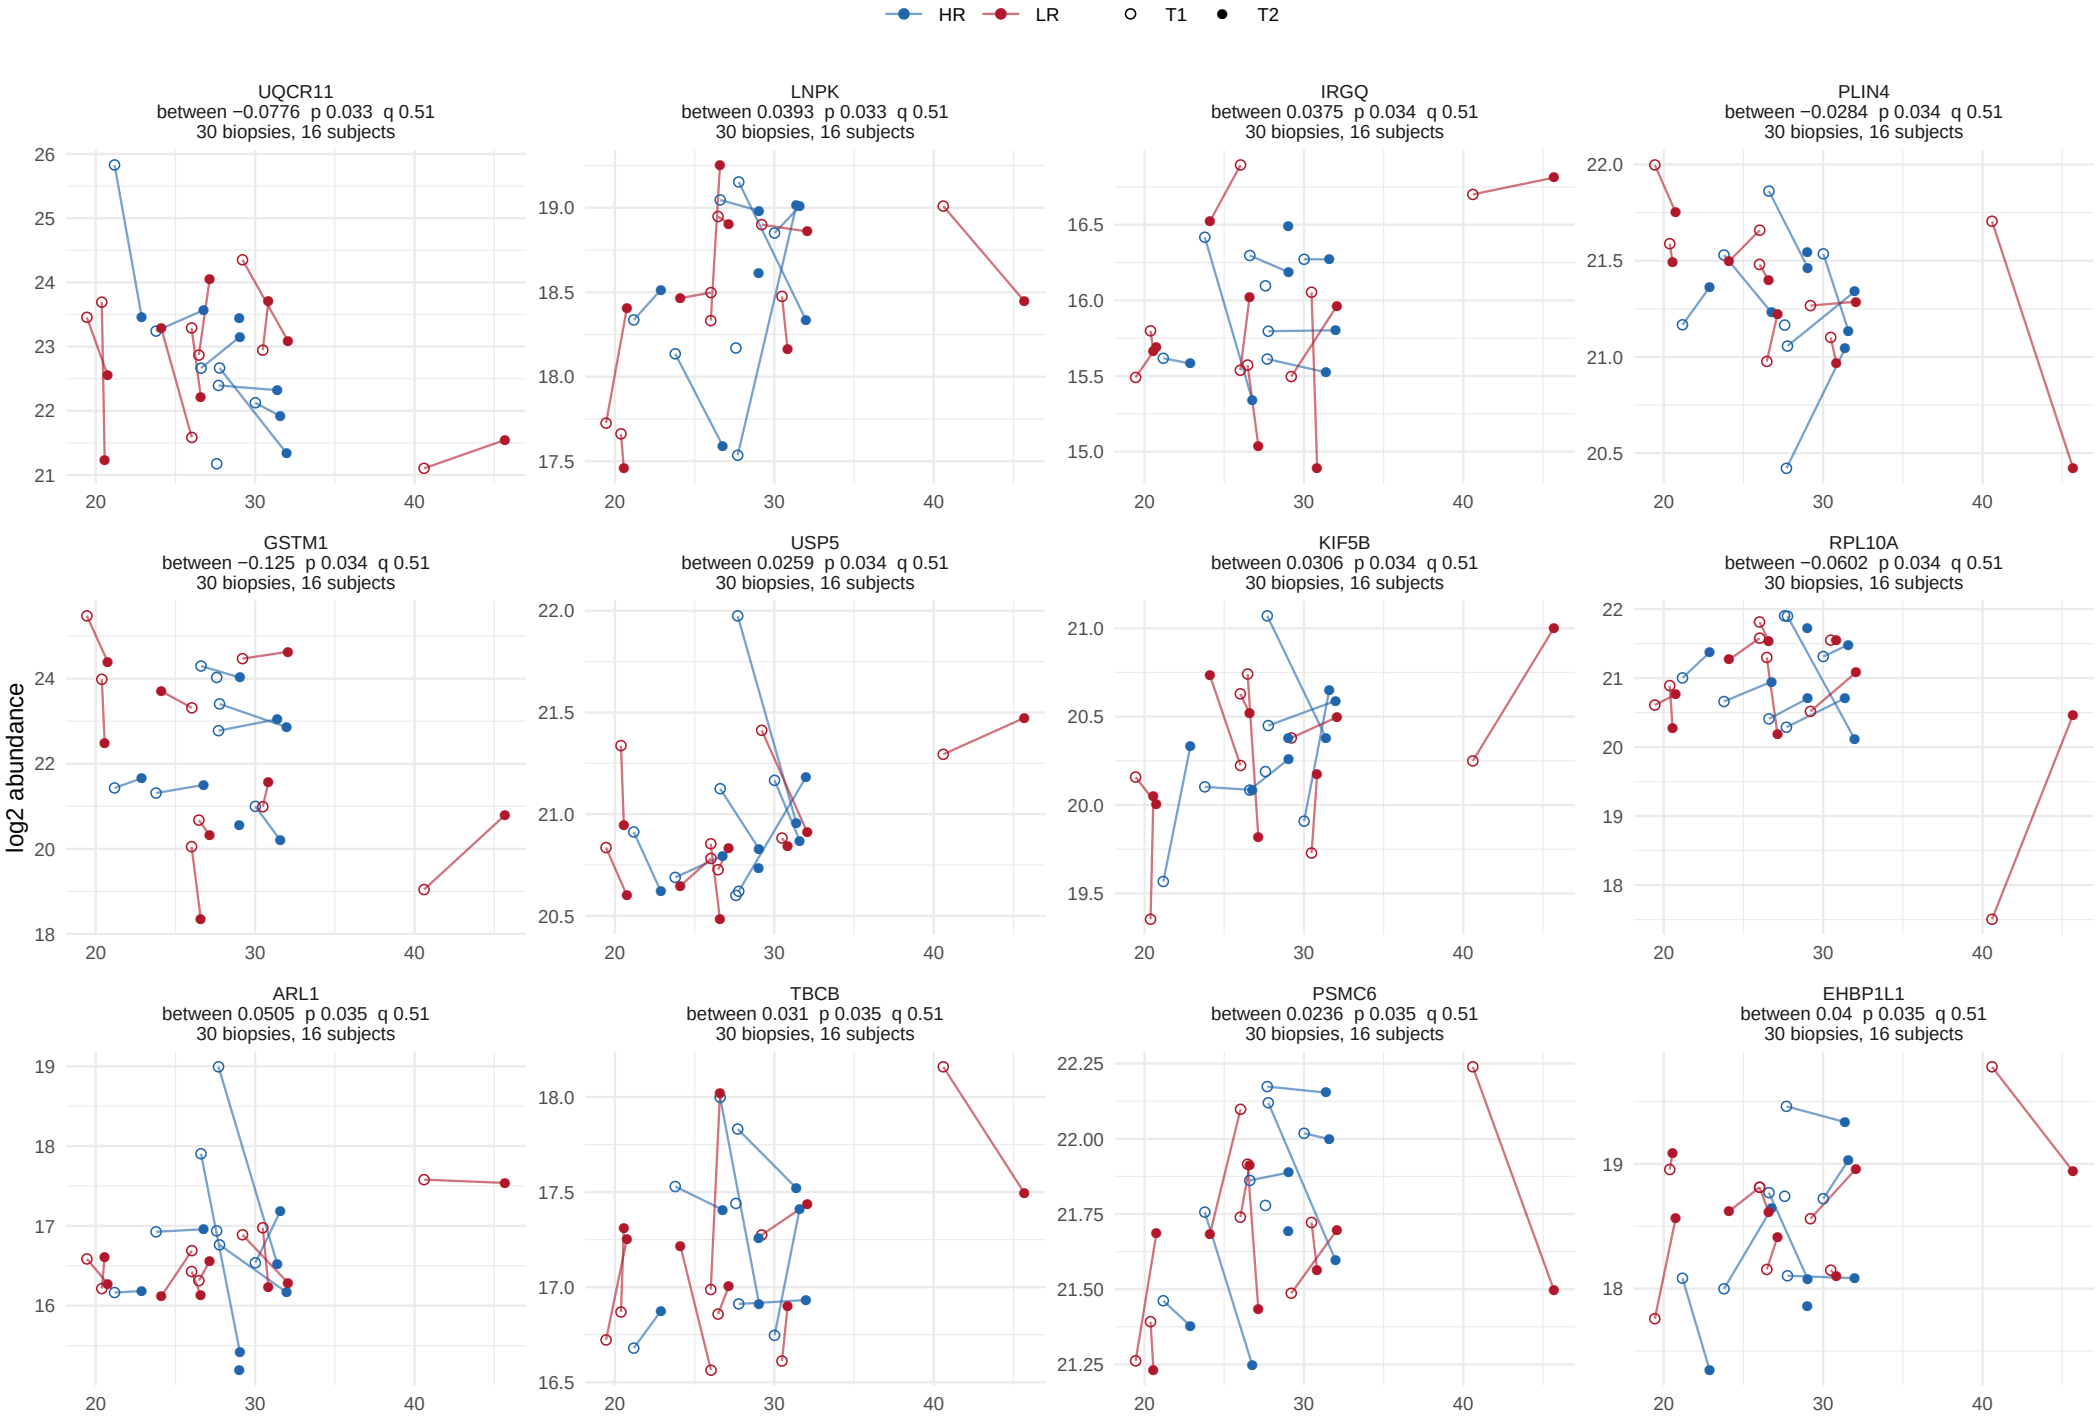

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

mcsa, between−person term


166 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 12 of 14.

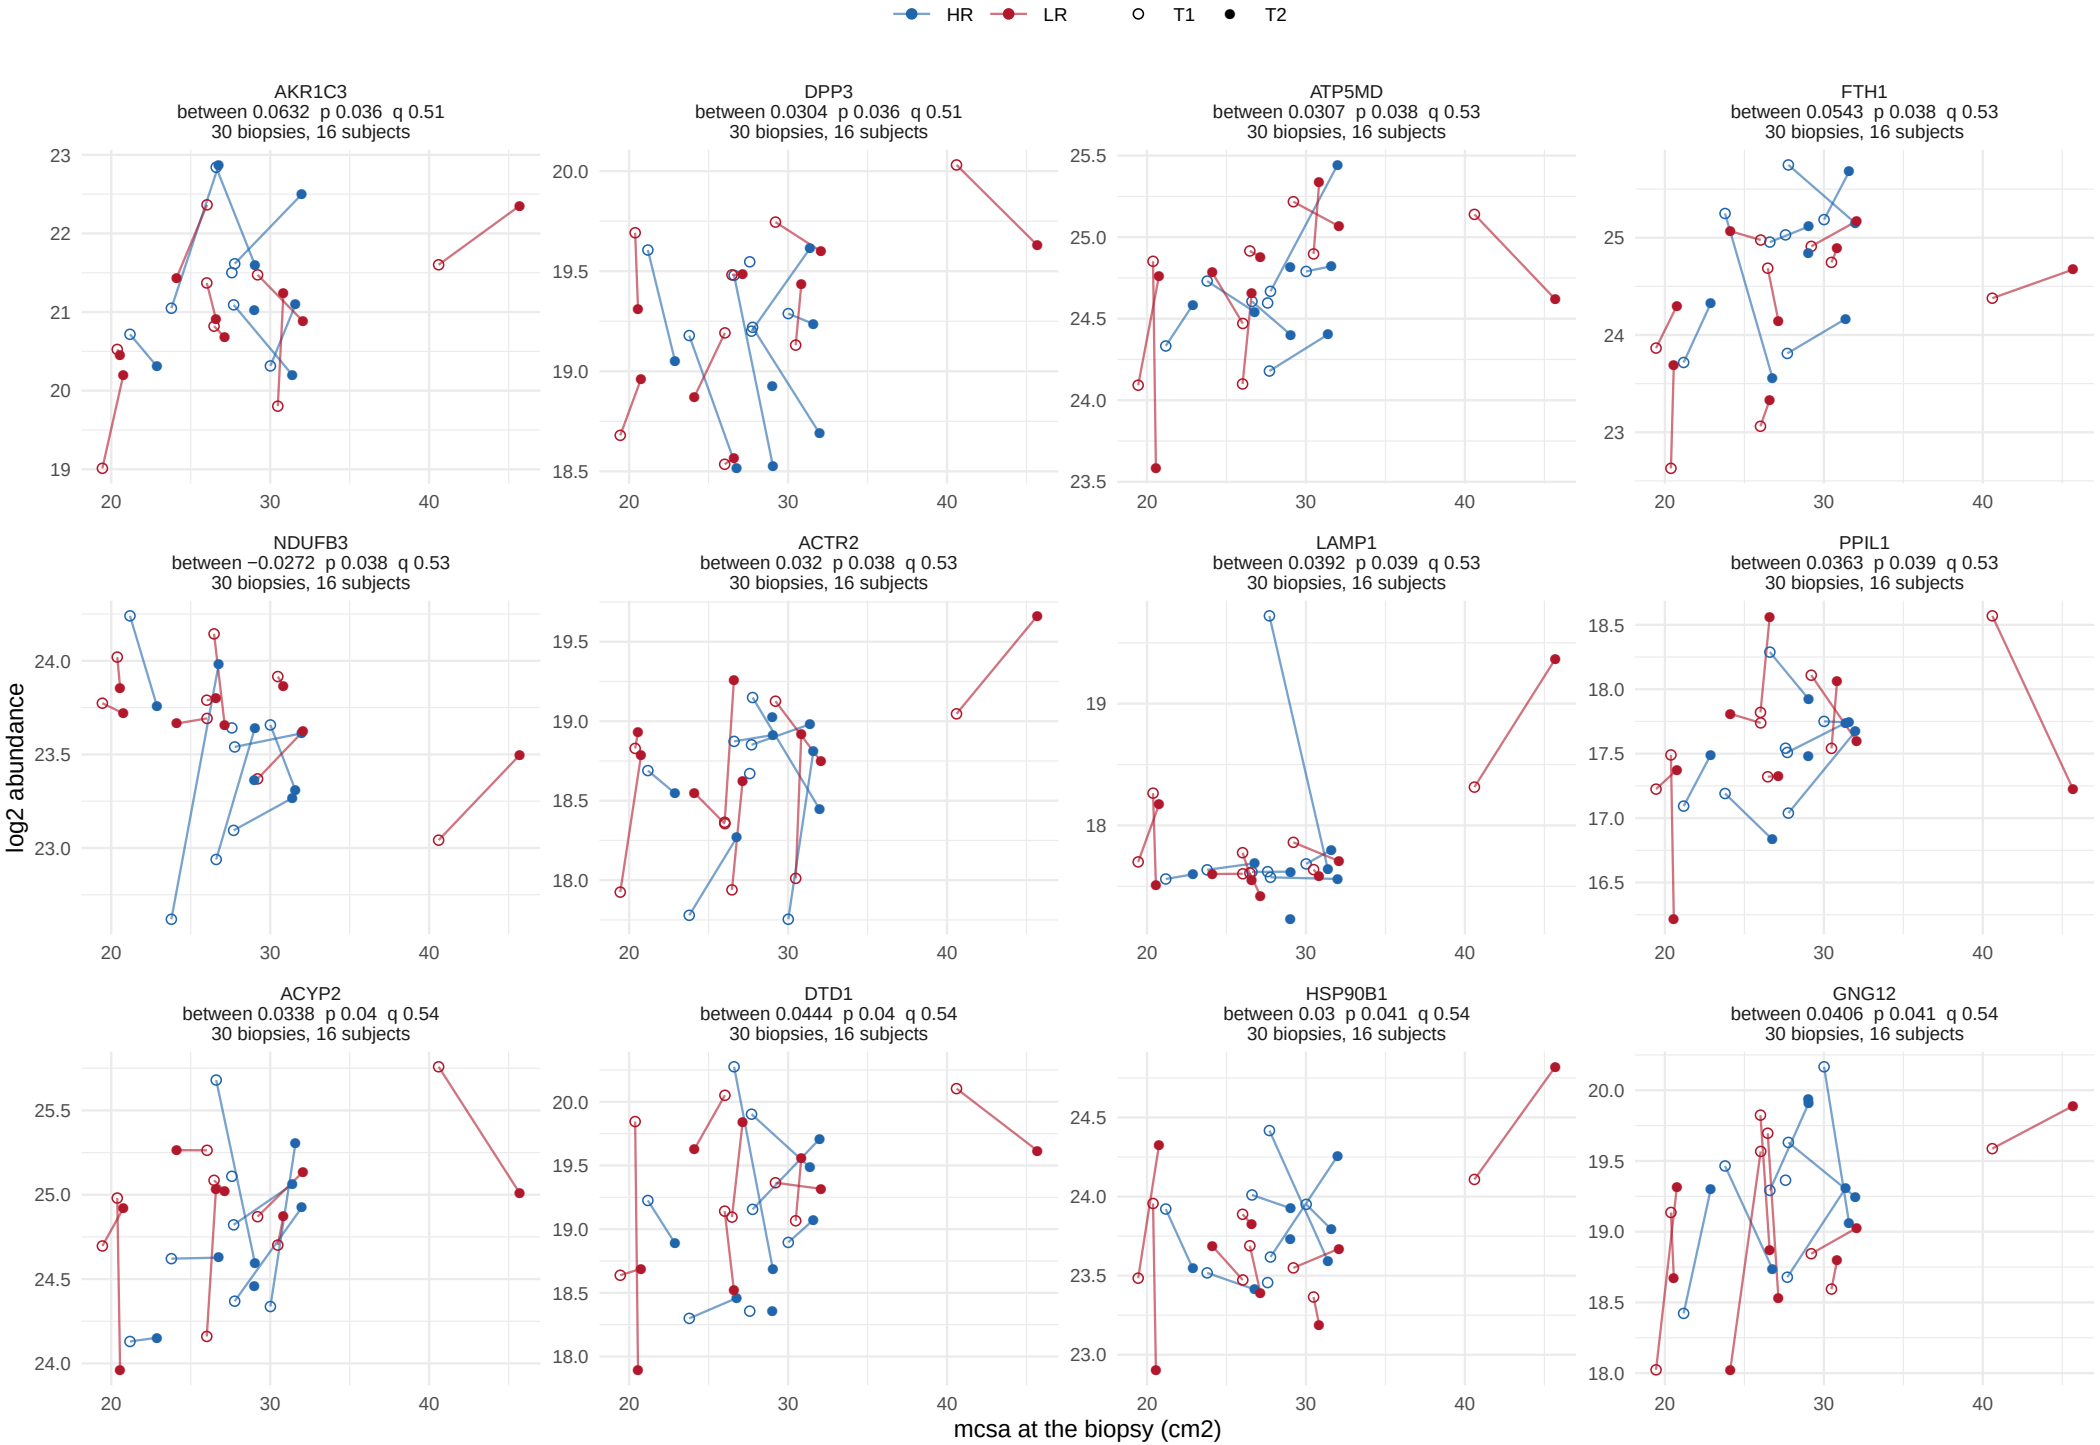

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

mcsa, between−person term


166 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 13 of 14.

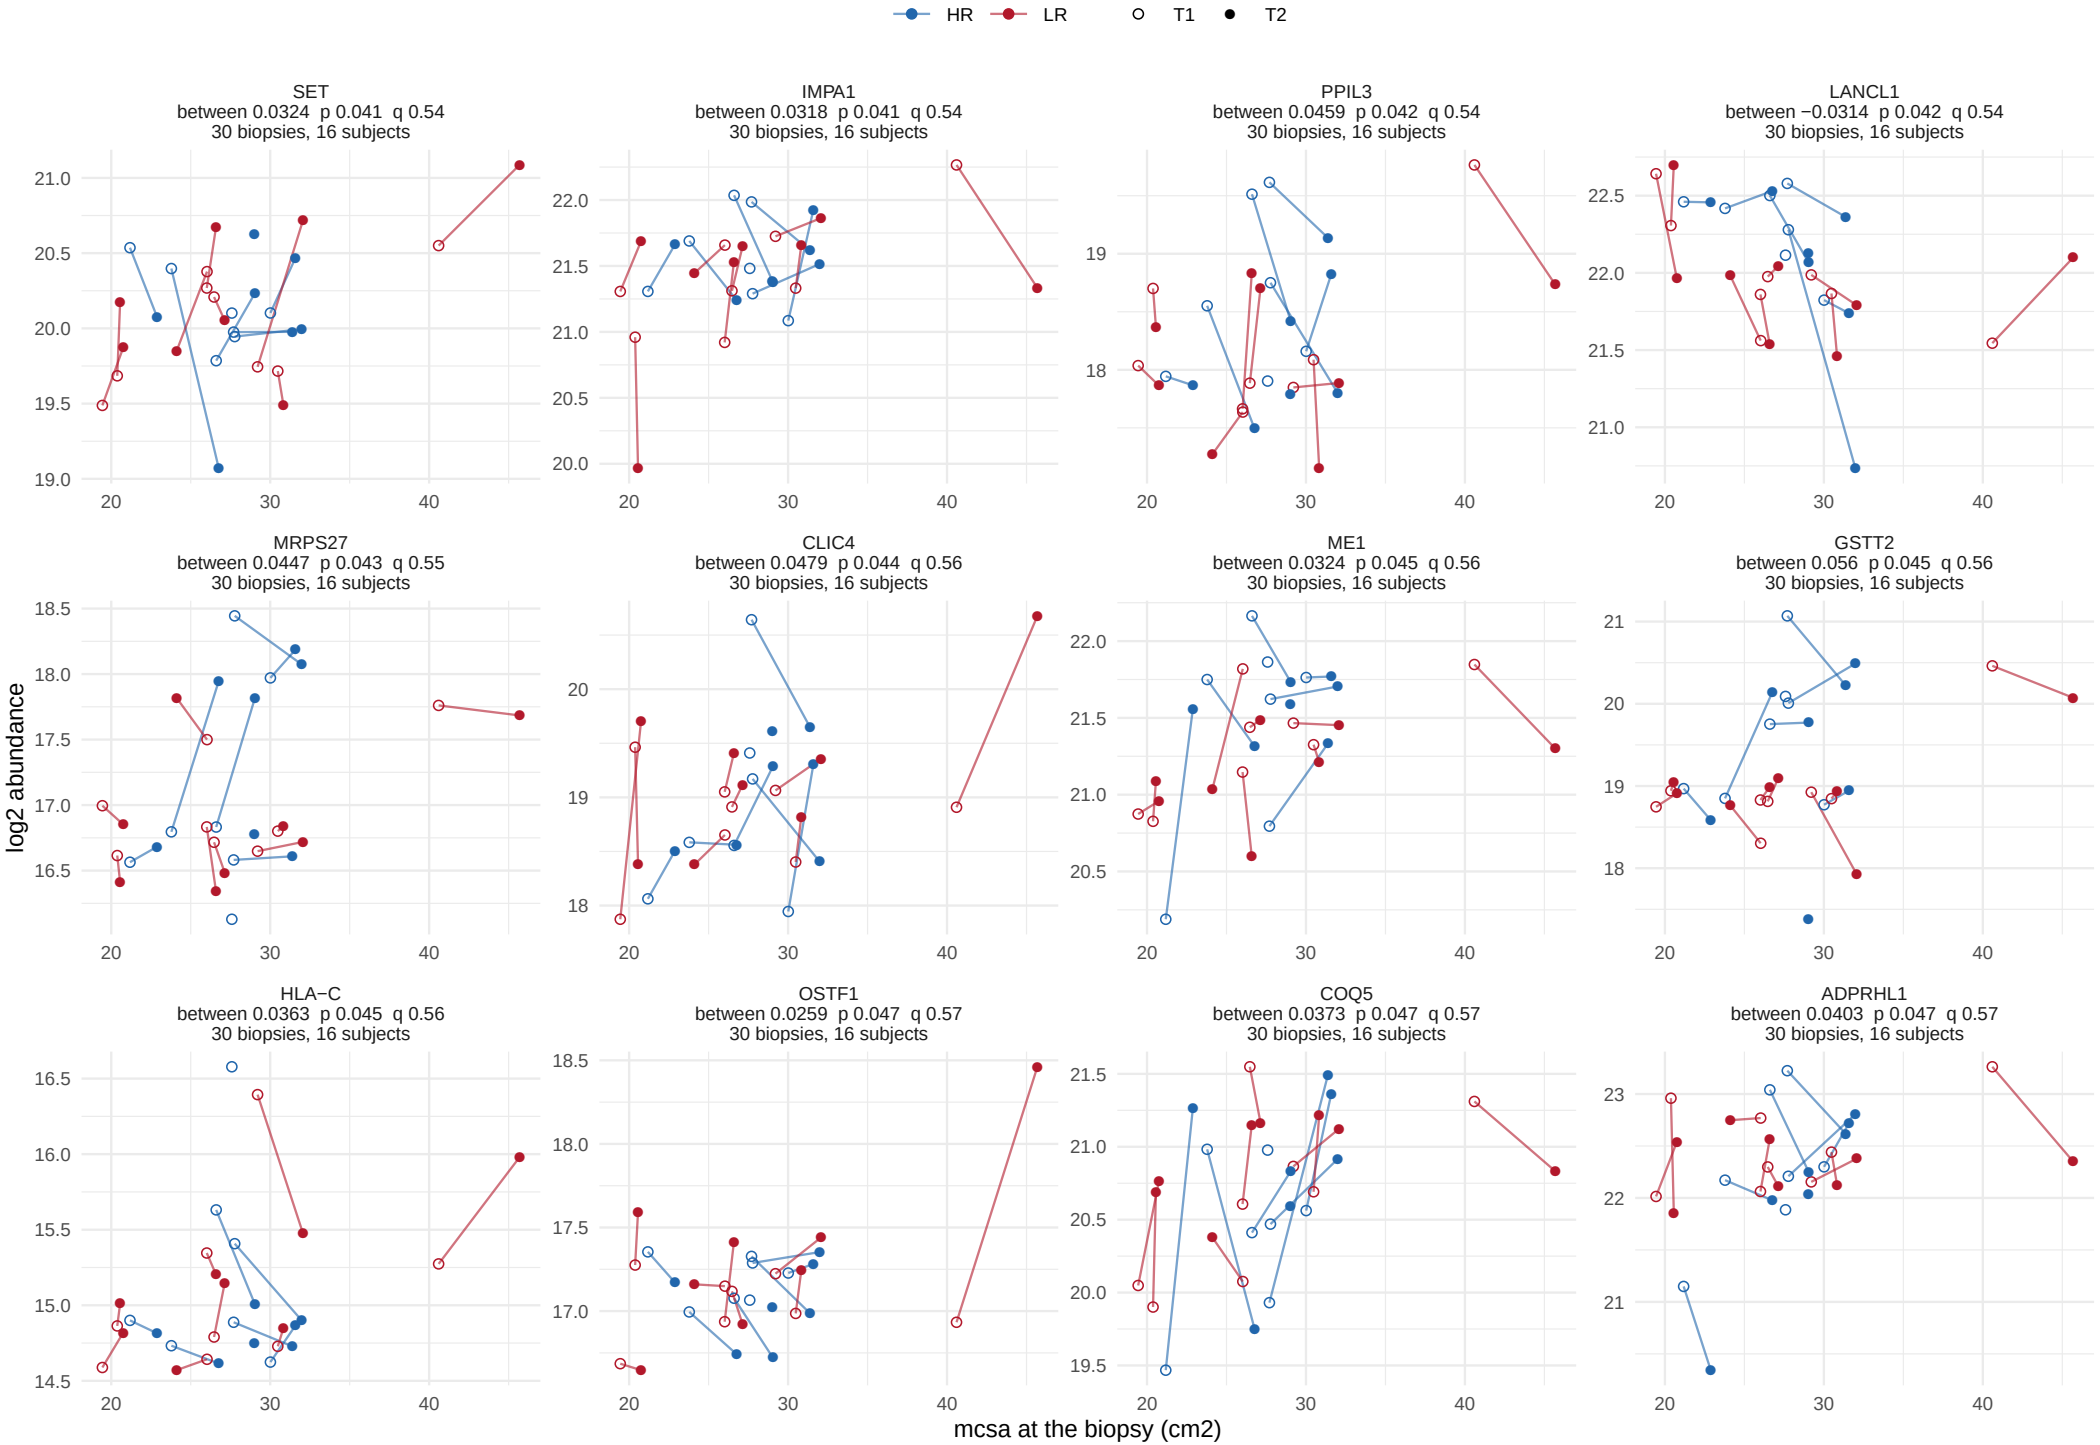

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

mcsa, between−person term


166 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 14 of 14.

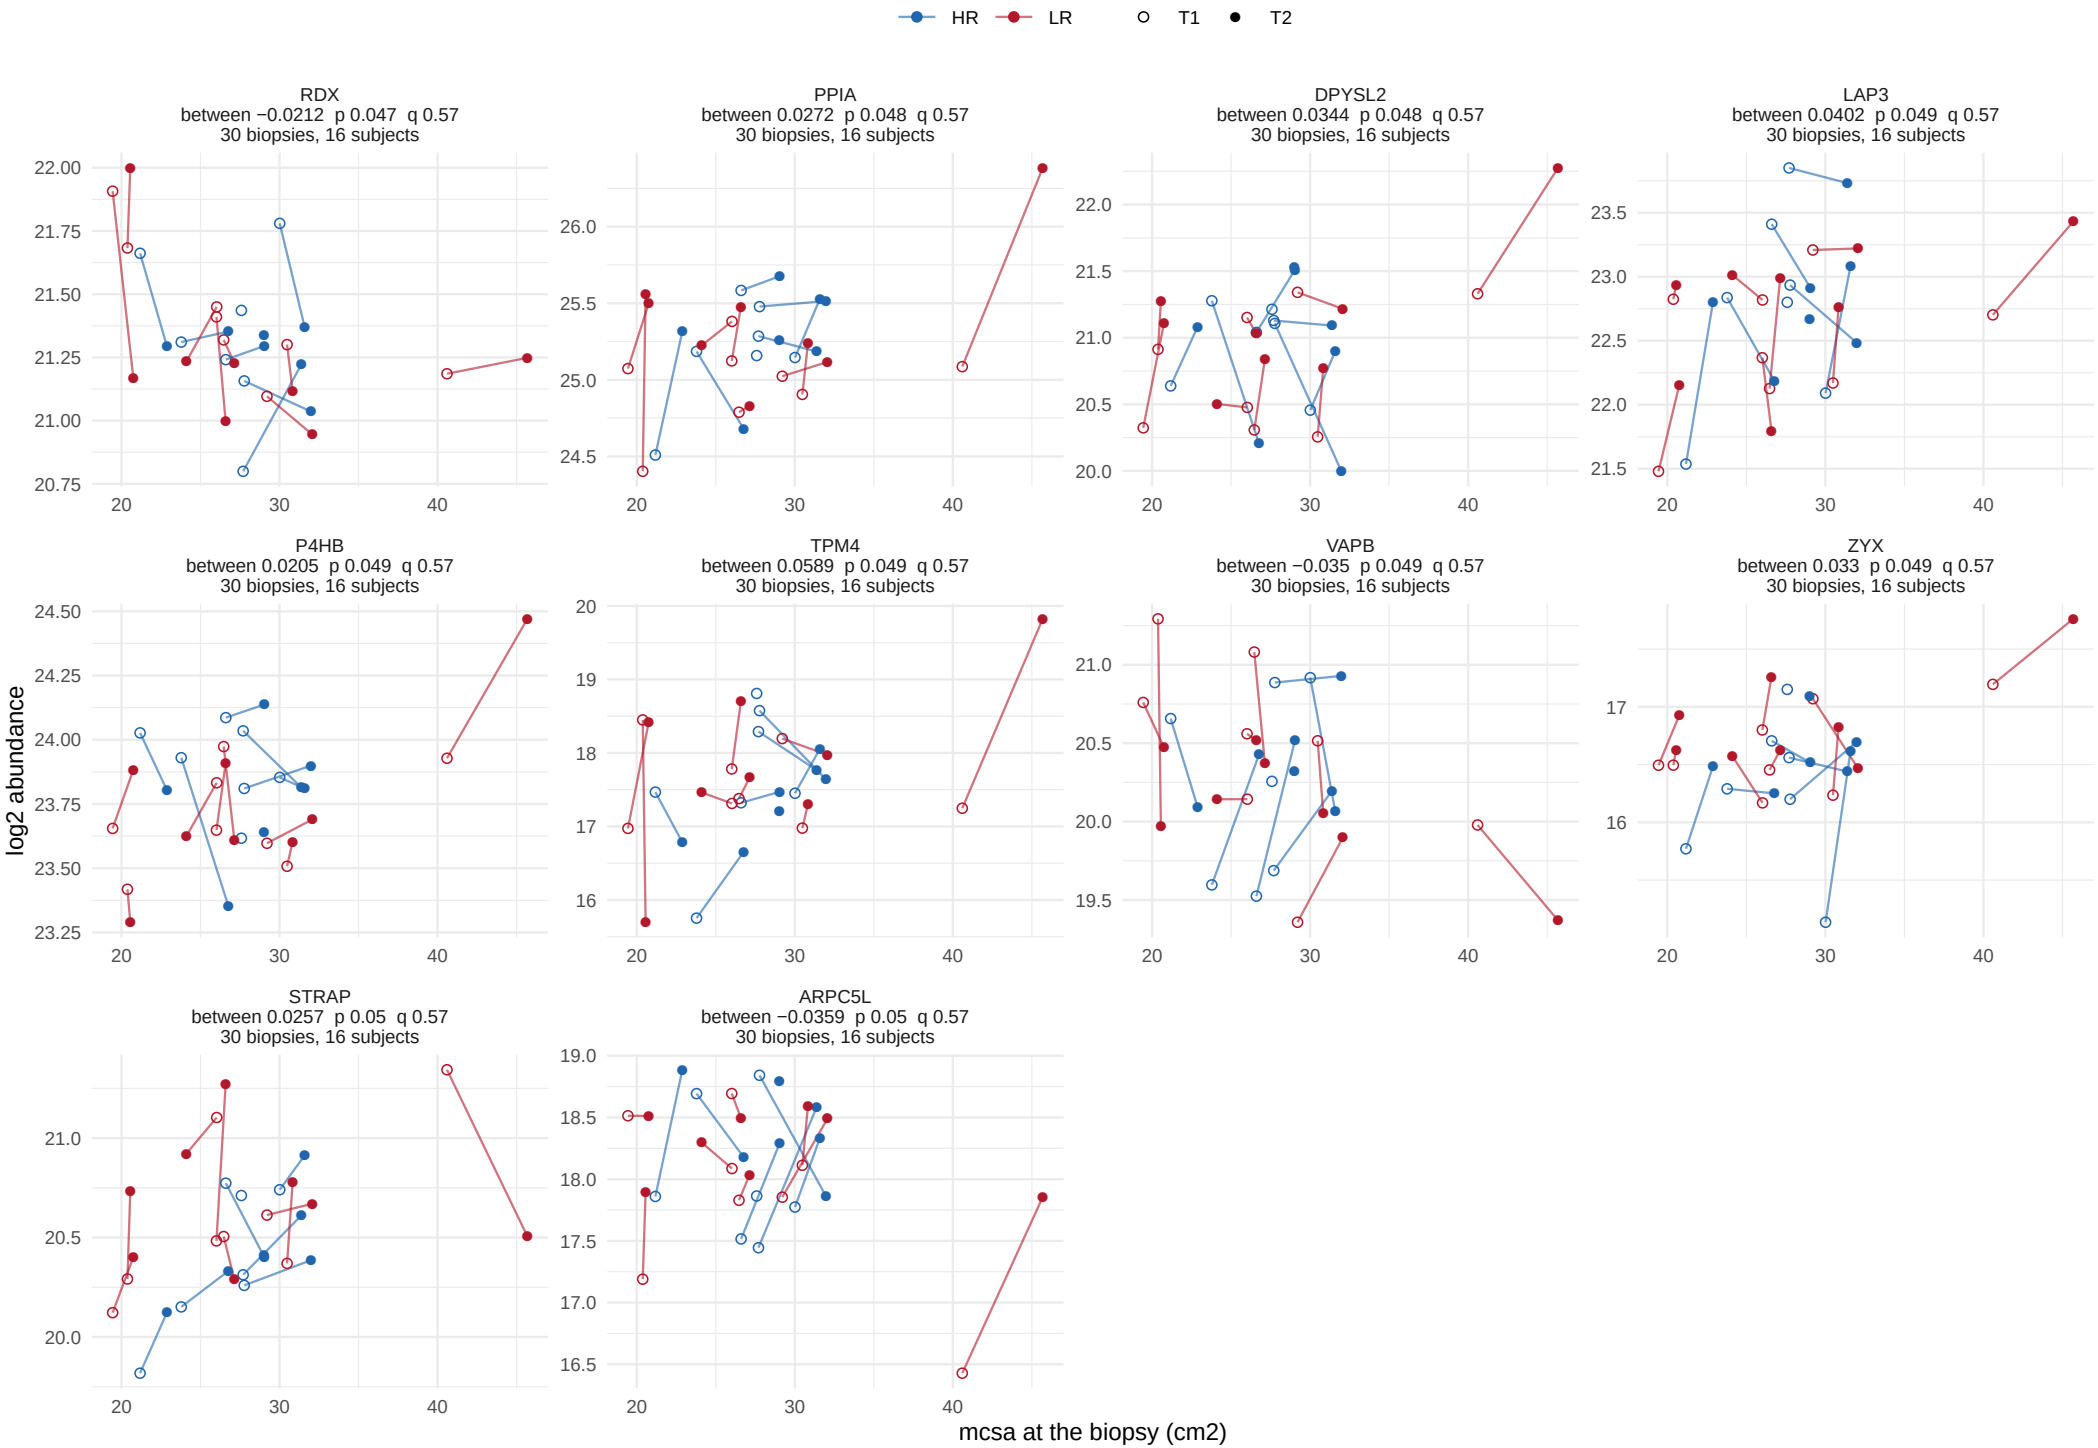

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_press_1rm, within−person term


100 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 1 of 9.

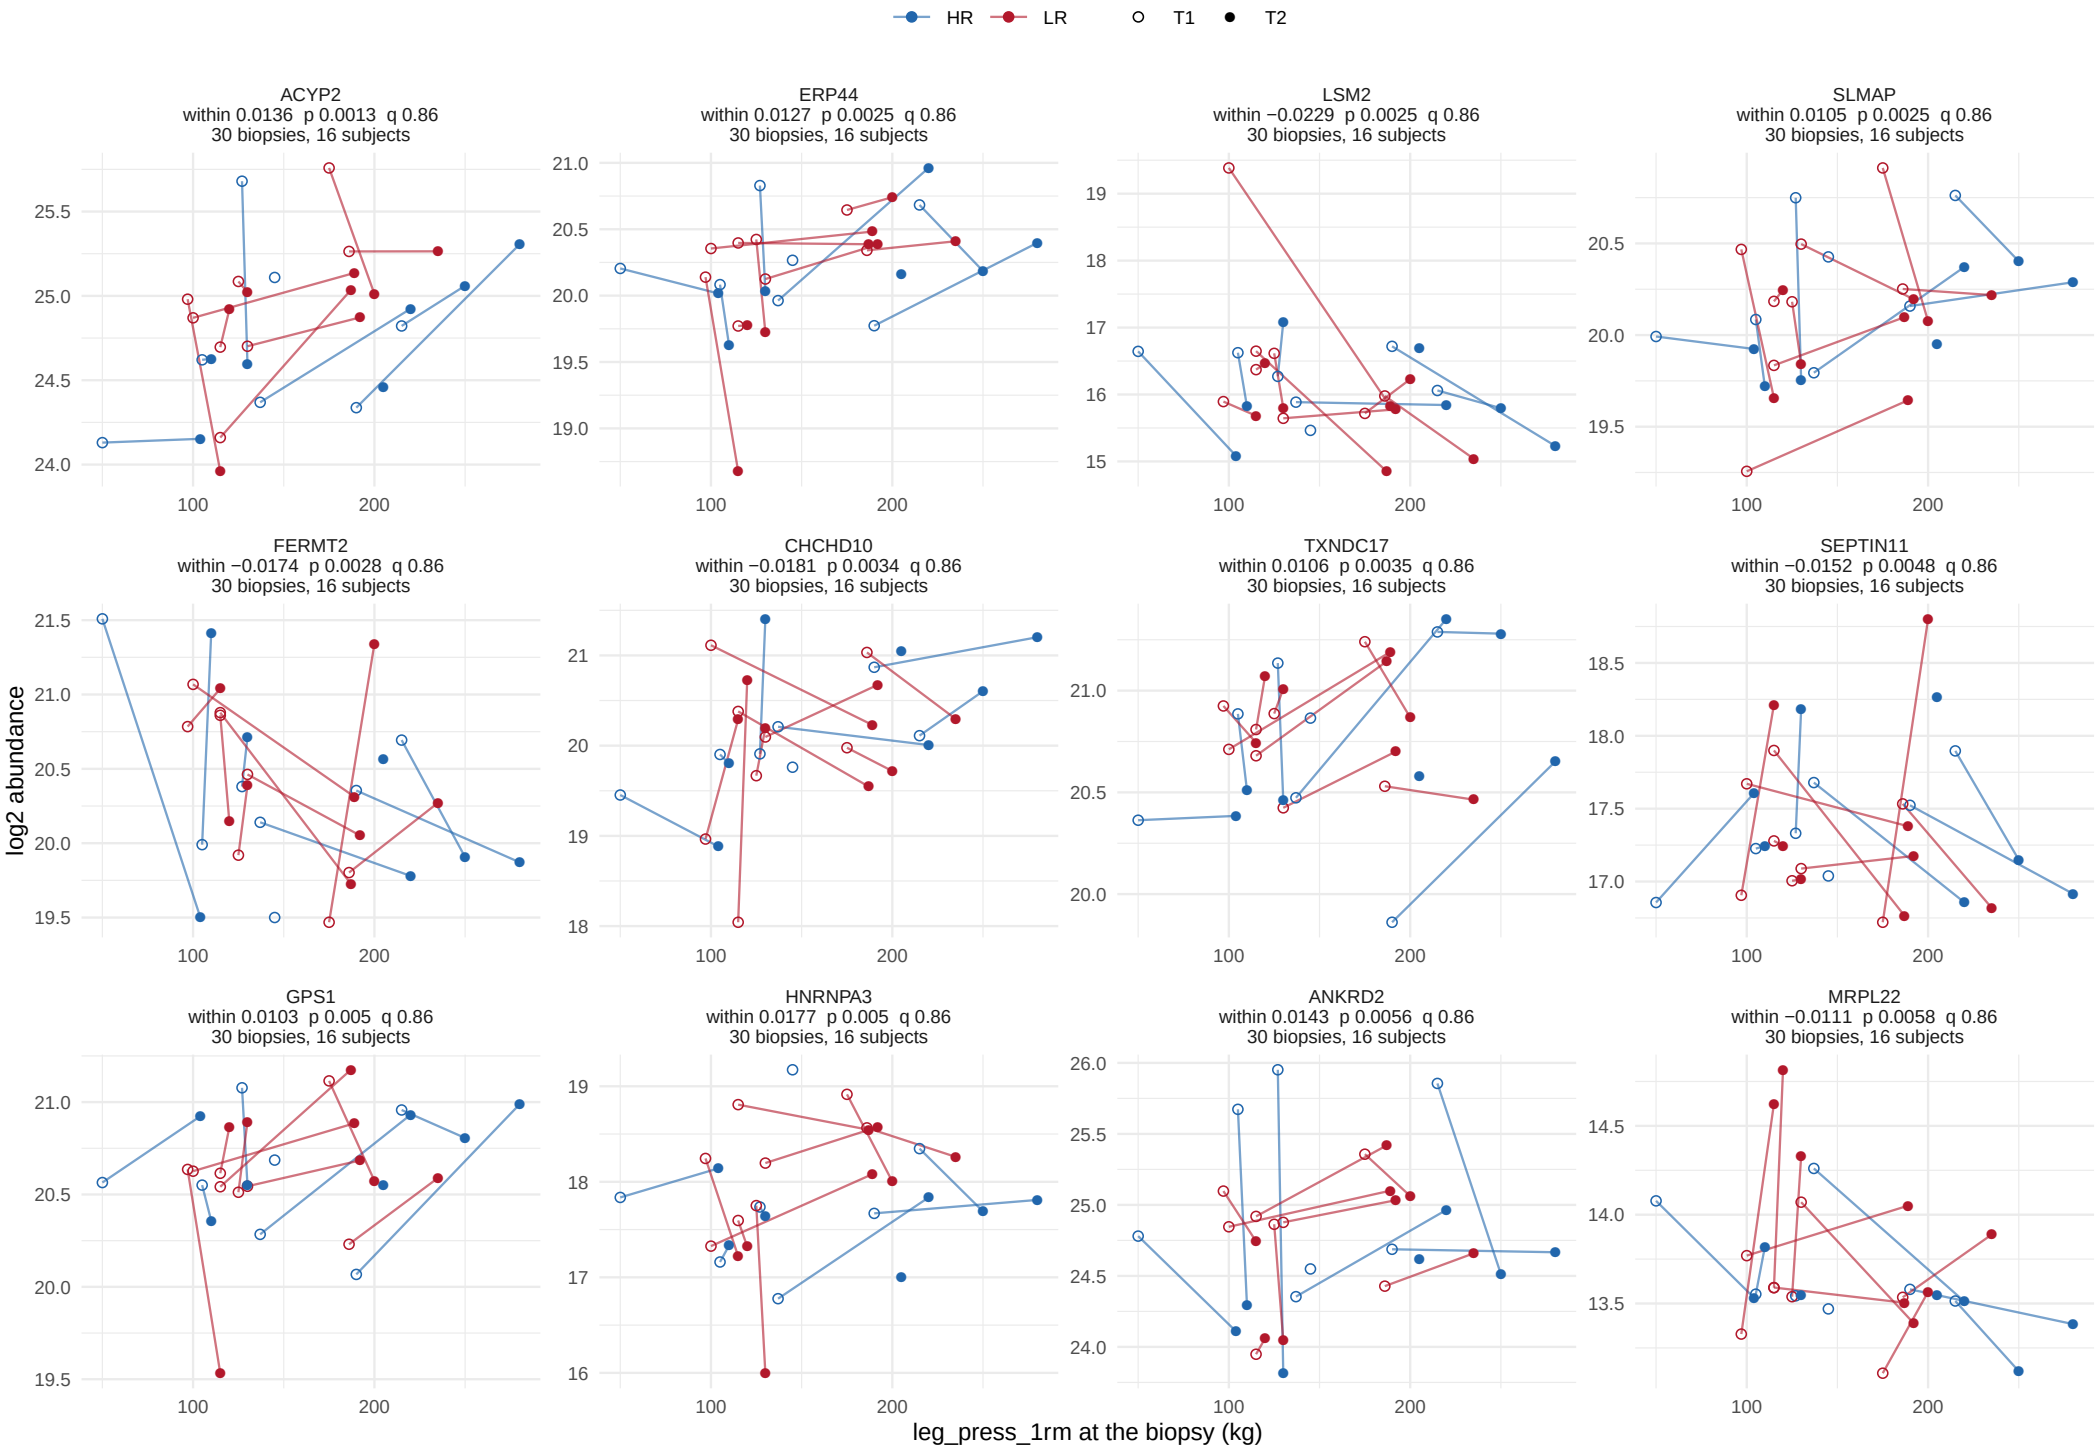

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_press_1rm, within−person term


100 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 2 of 9.

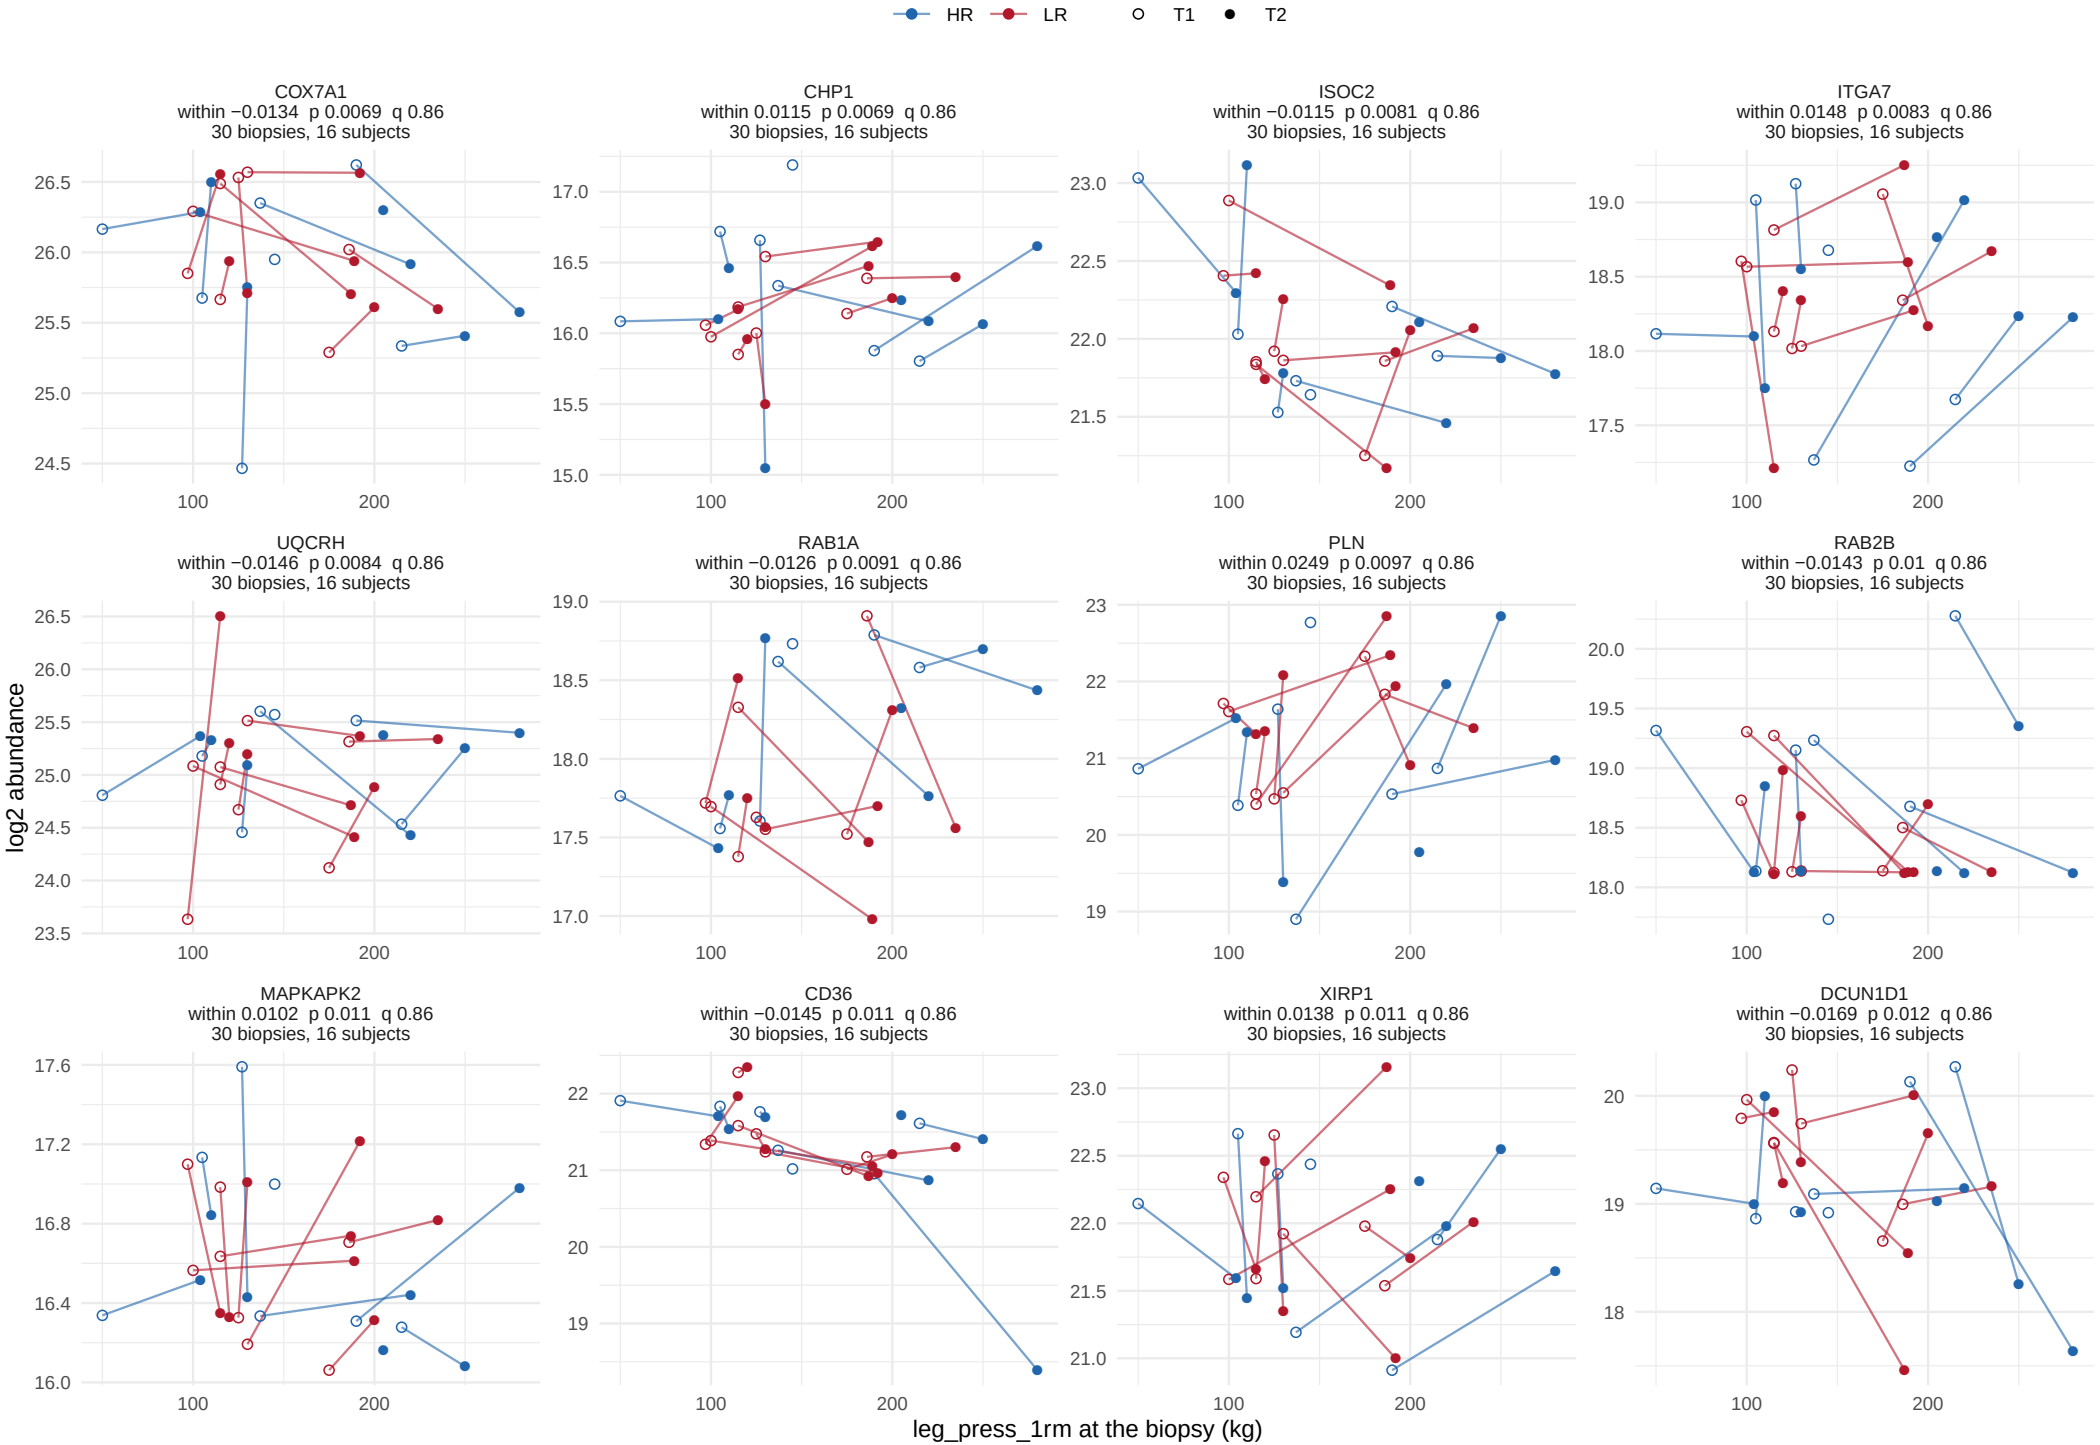

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_press_1rm, within−person term


100 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 3 of 9.

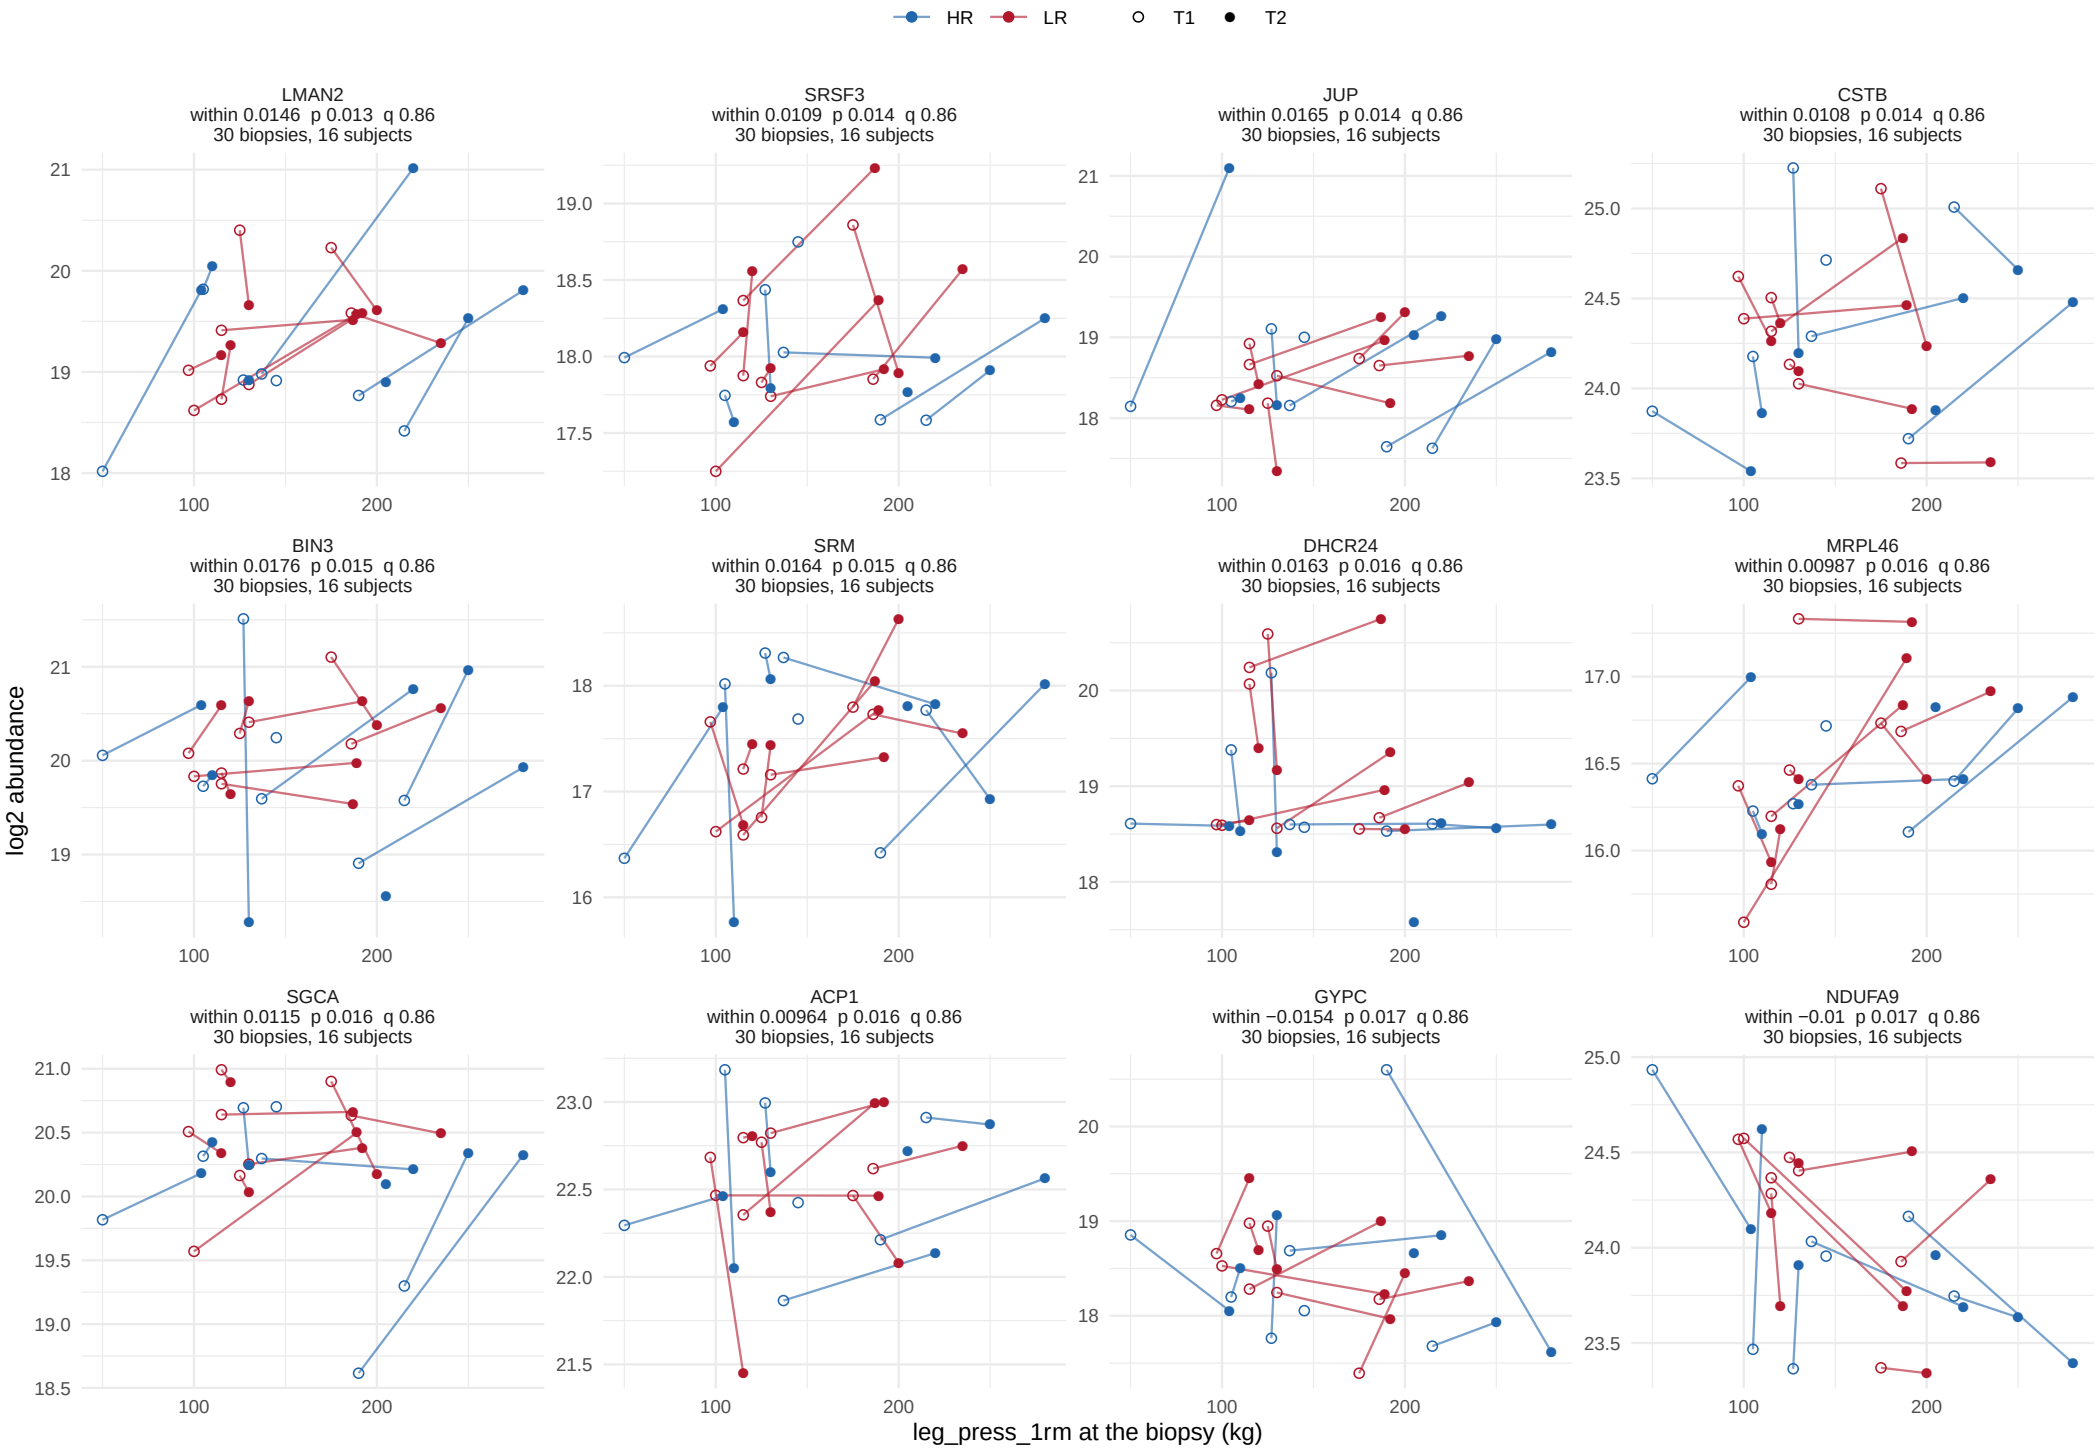

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_press_1rm, within−person term


100 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 4 of 9.

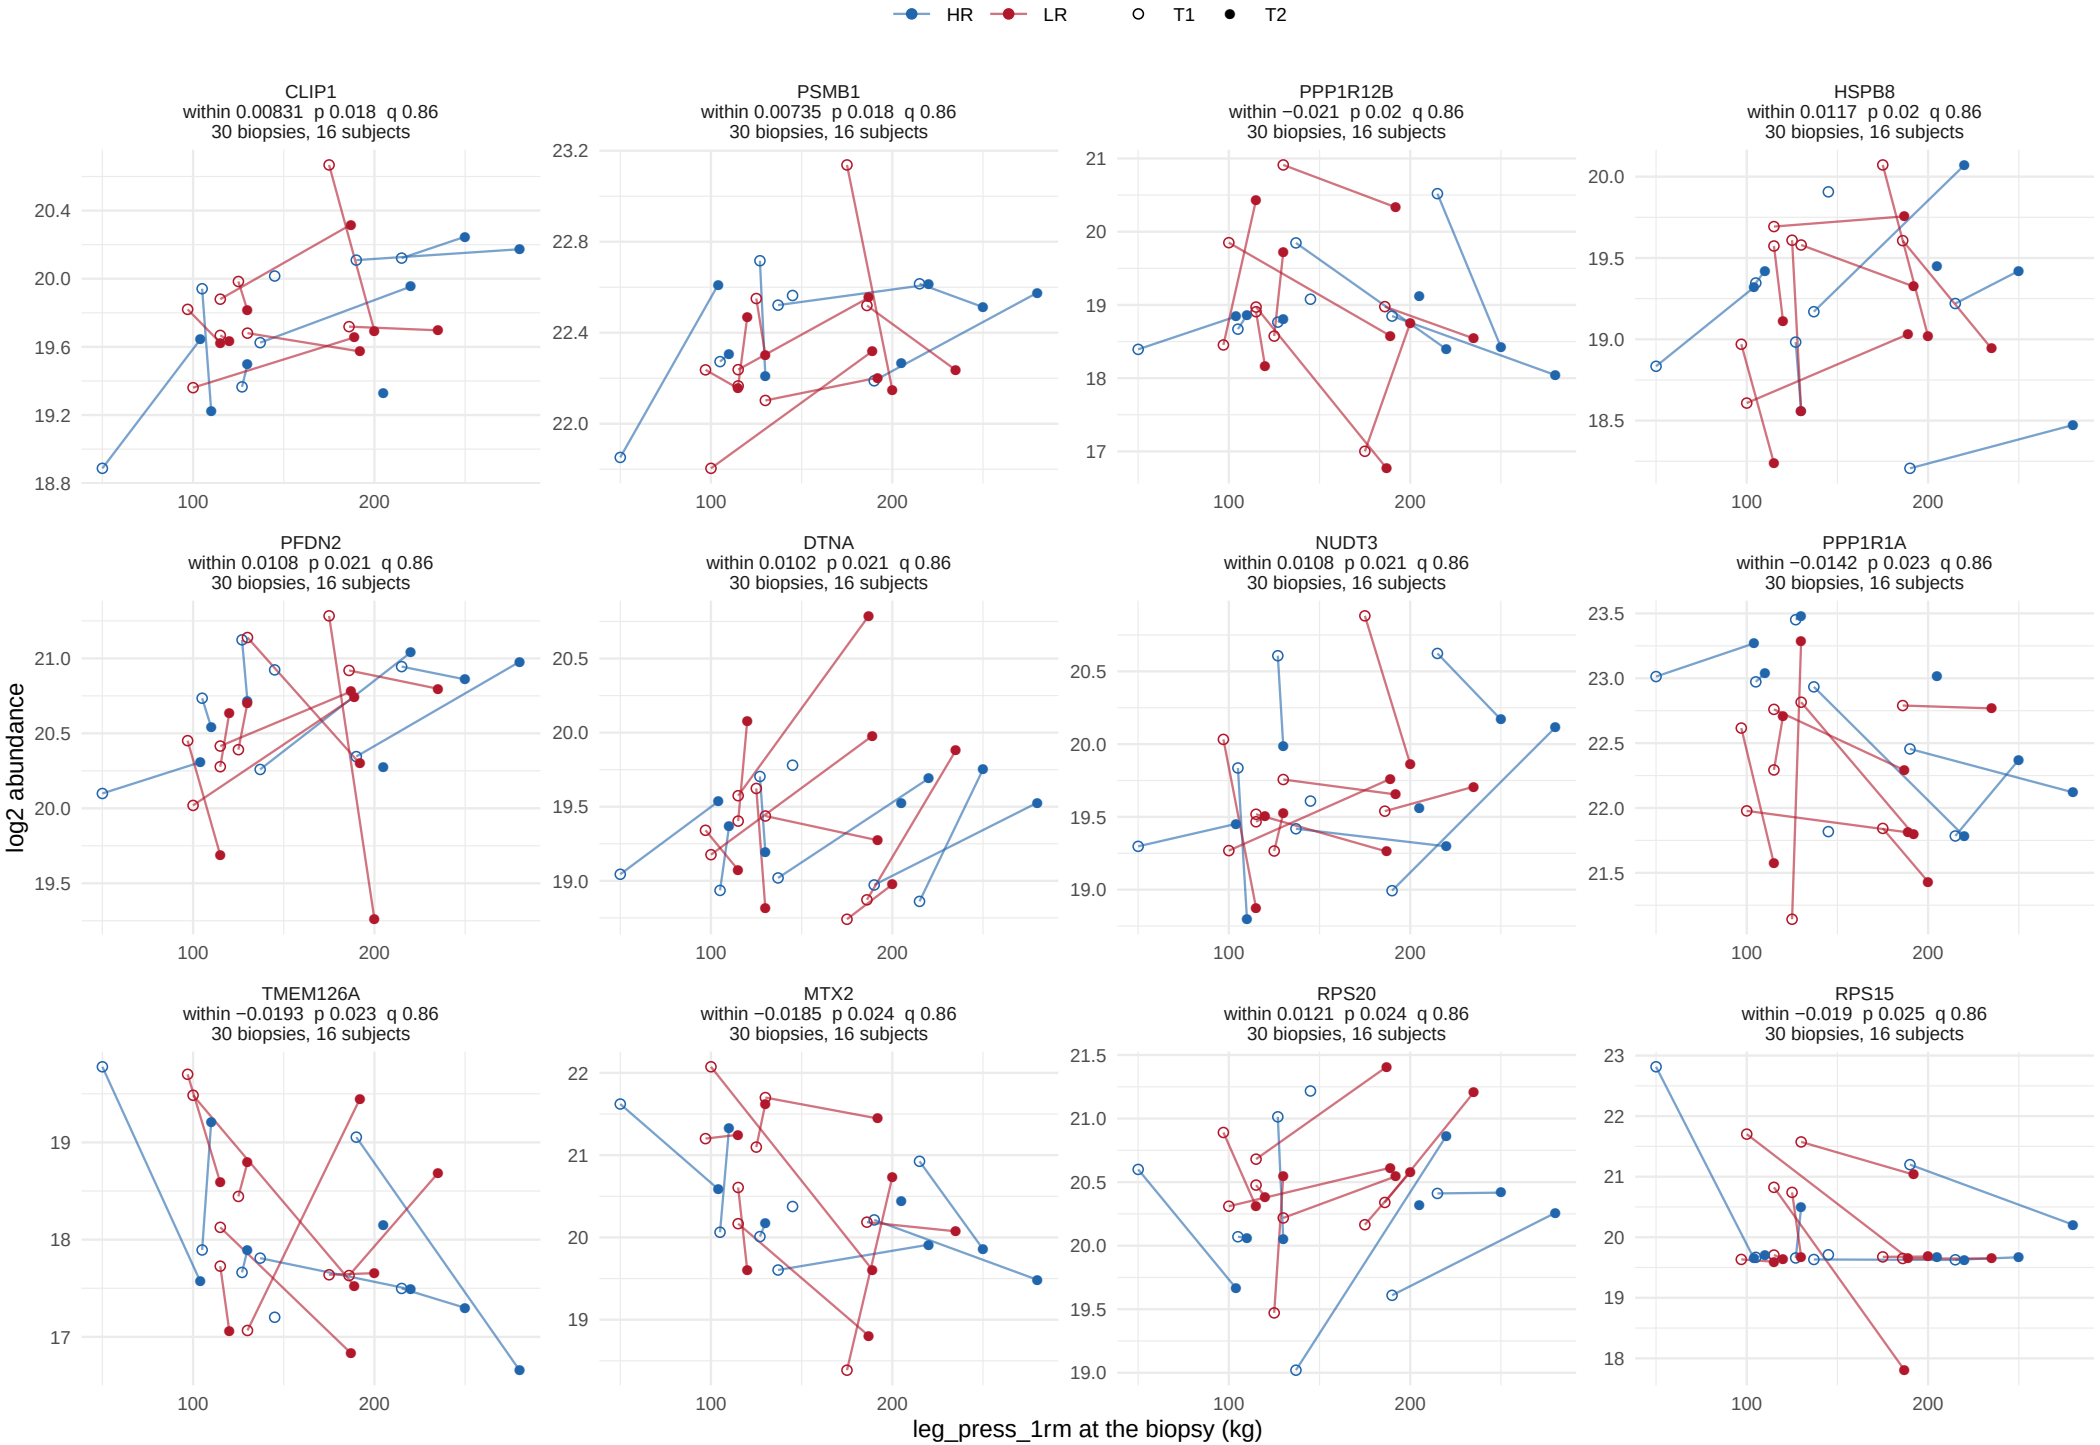

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_press_1rm, within−person term


100 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 5 of 9.

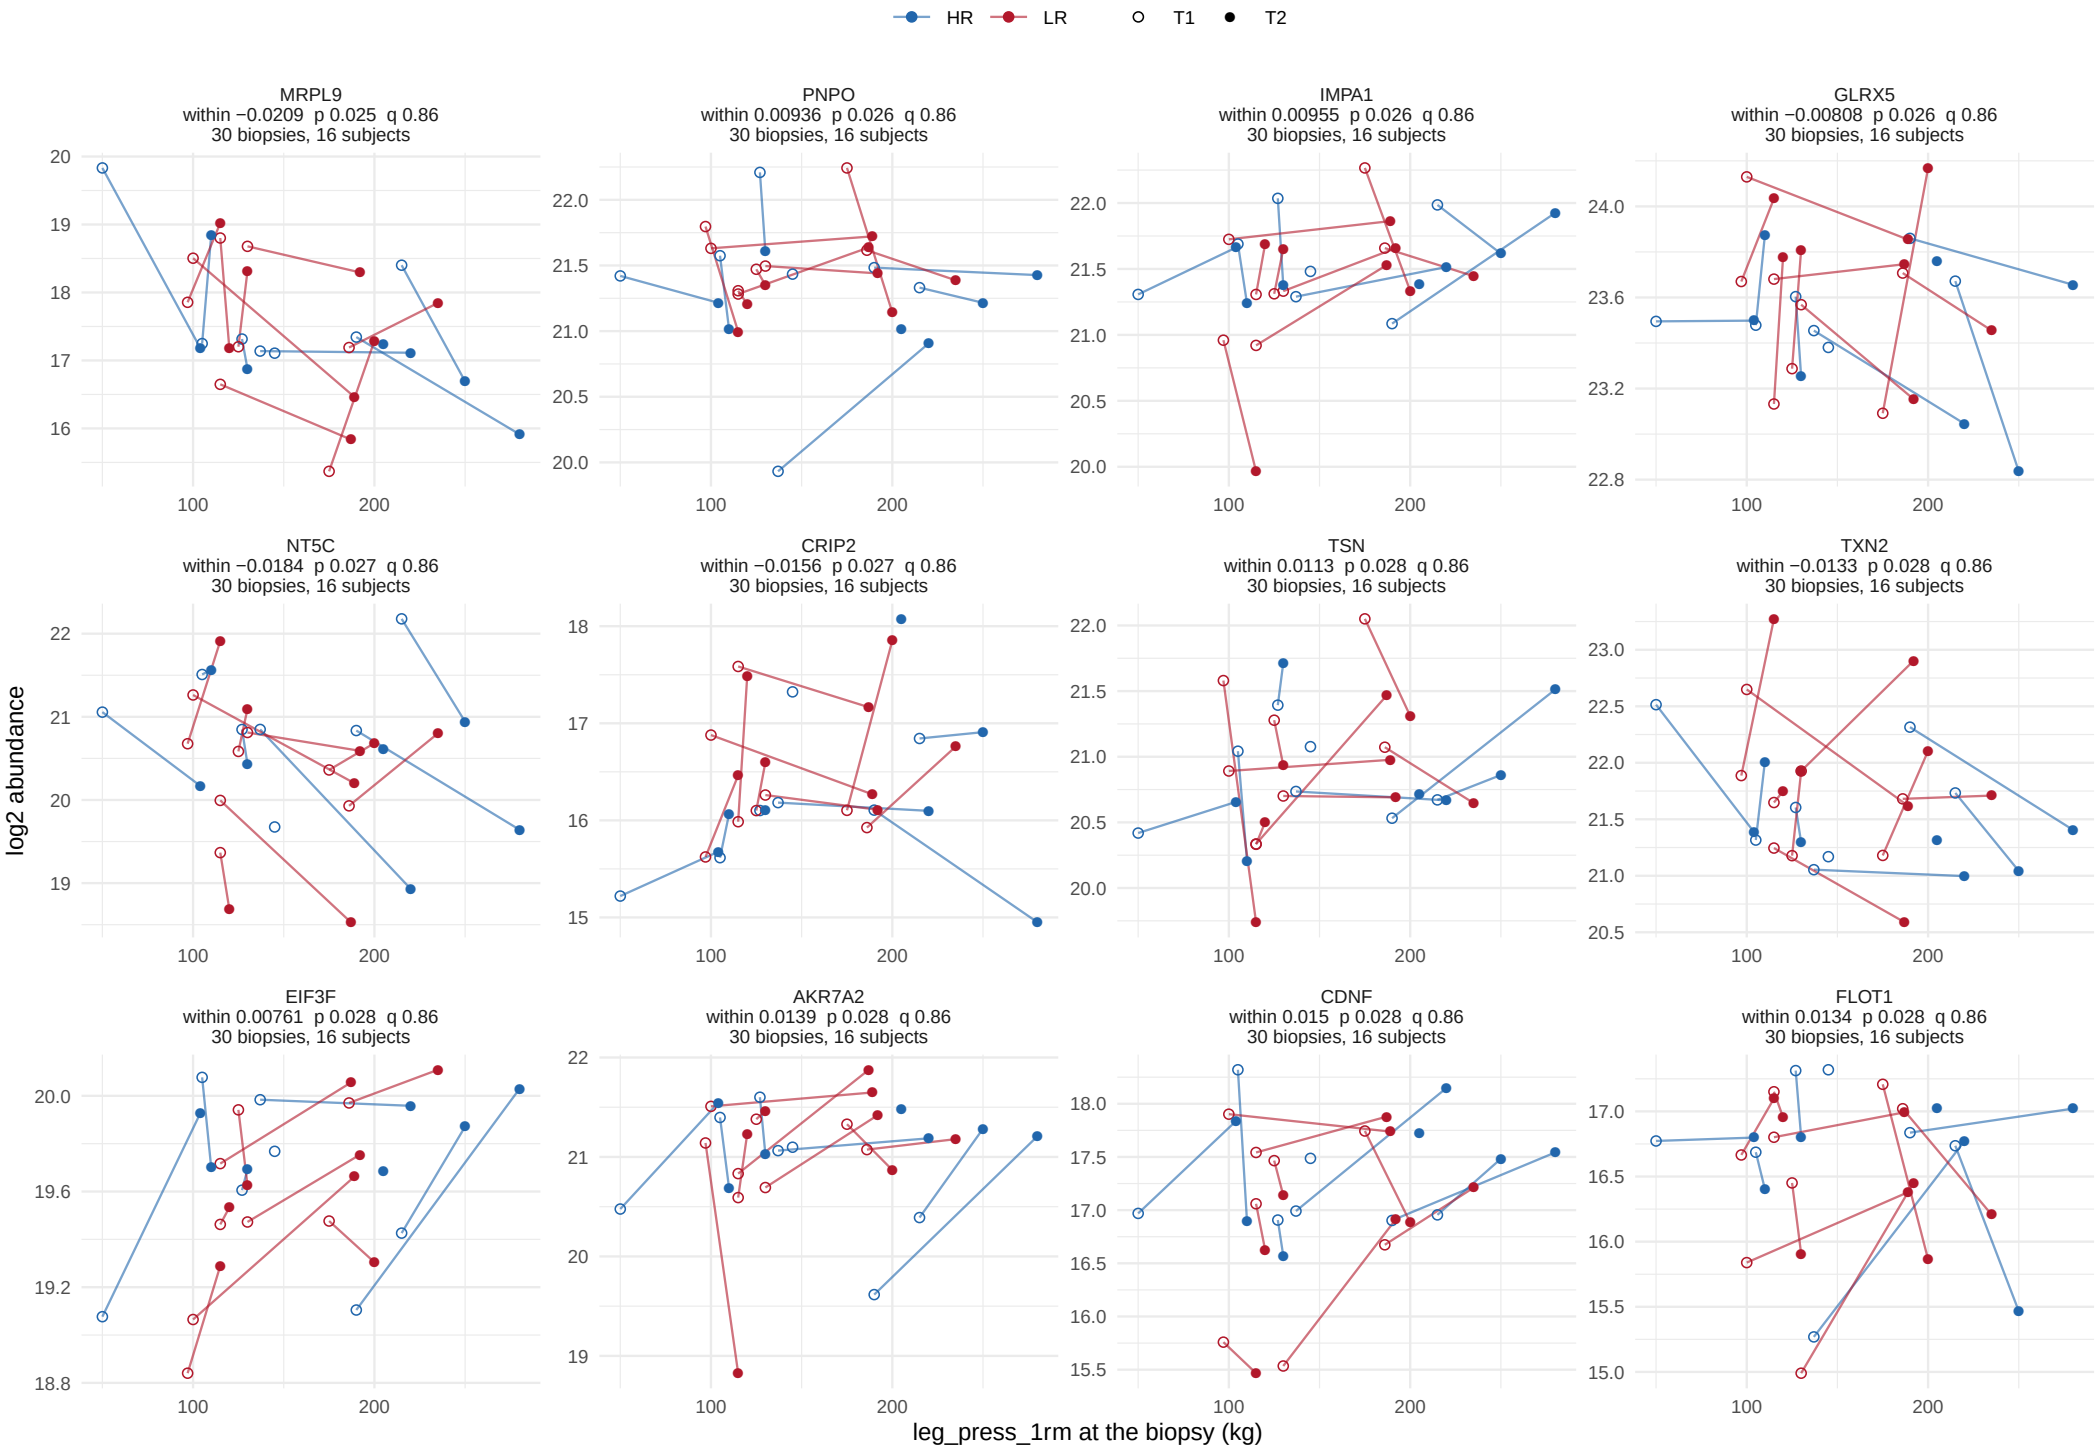

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_press_1rm, within−person term


100 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 6 of 9.

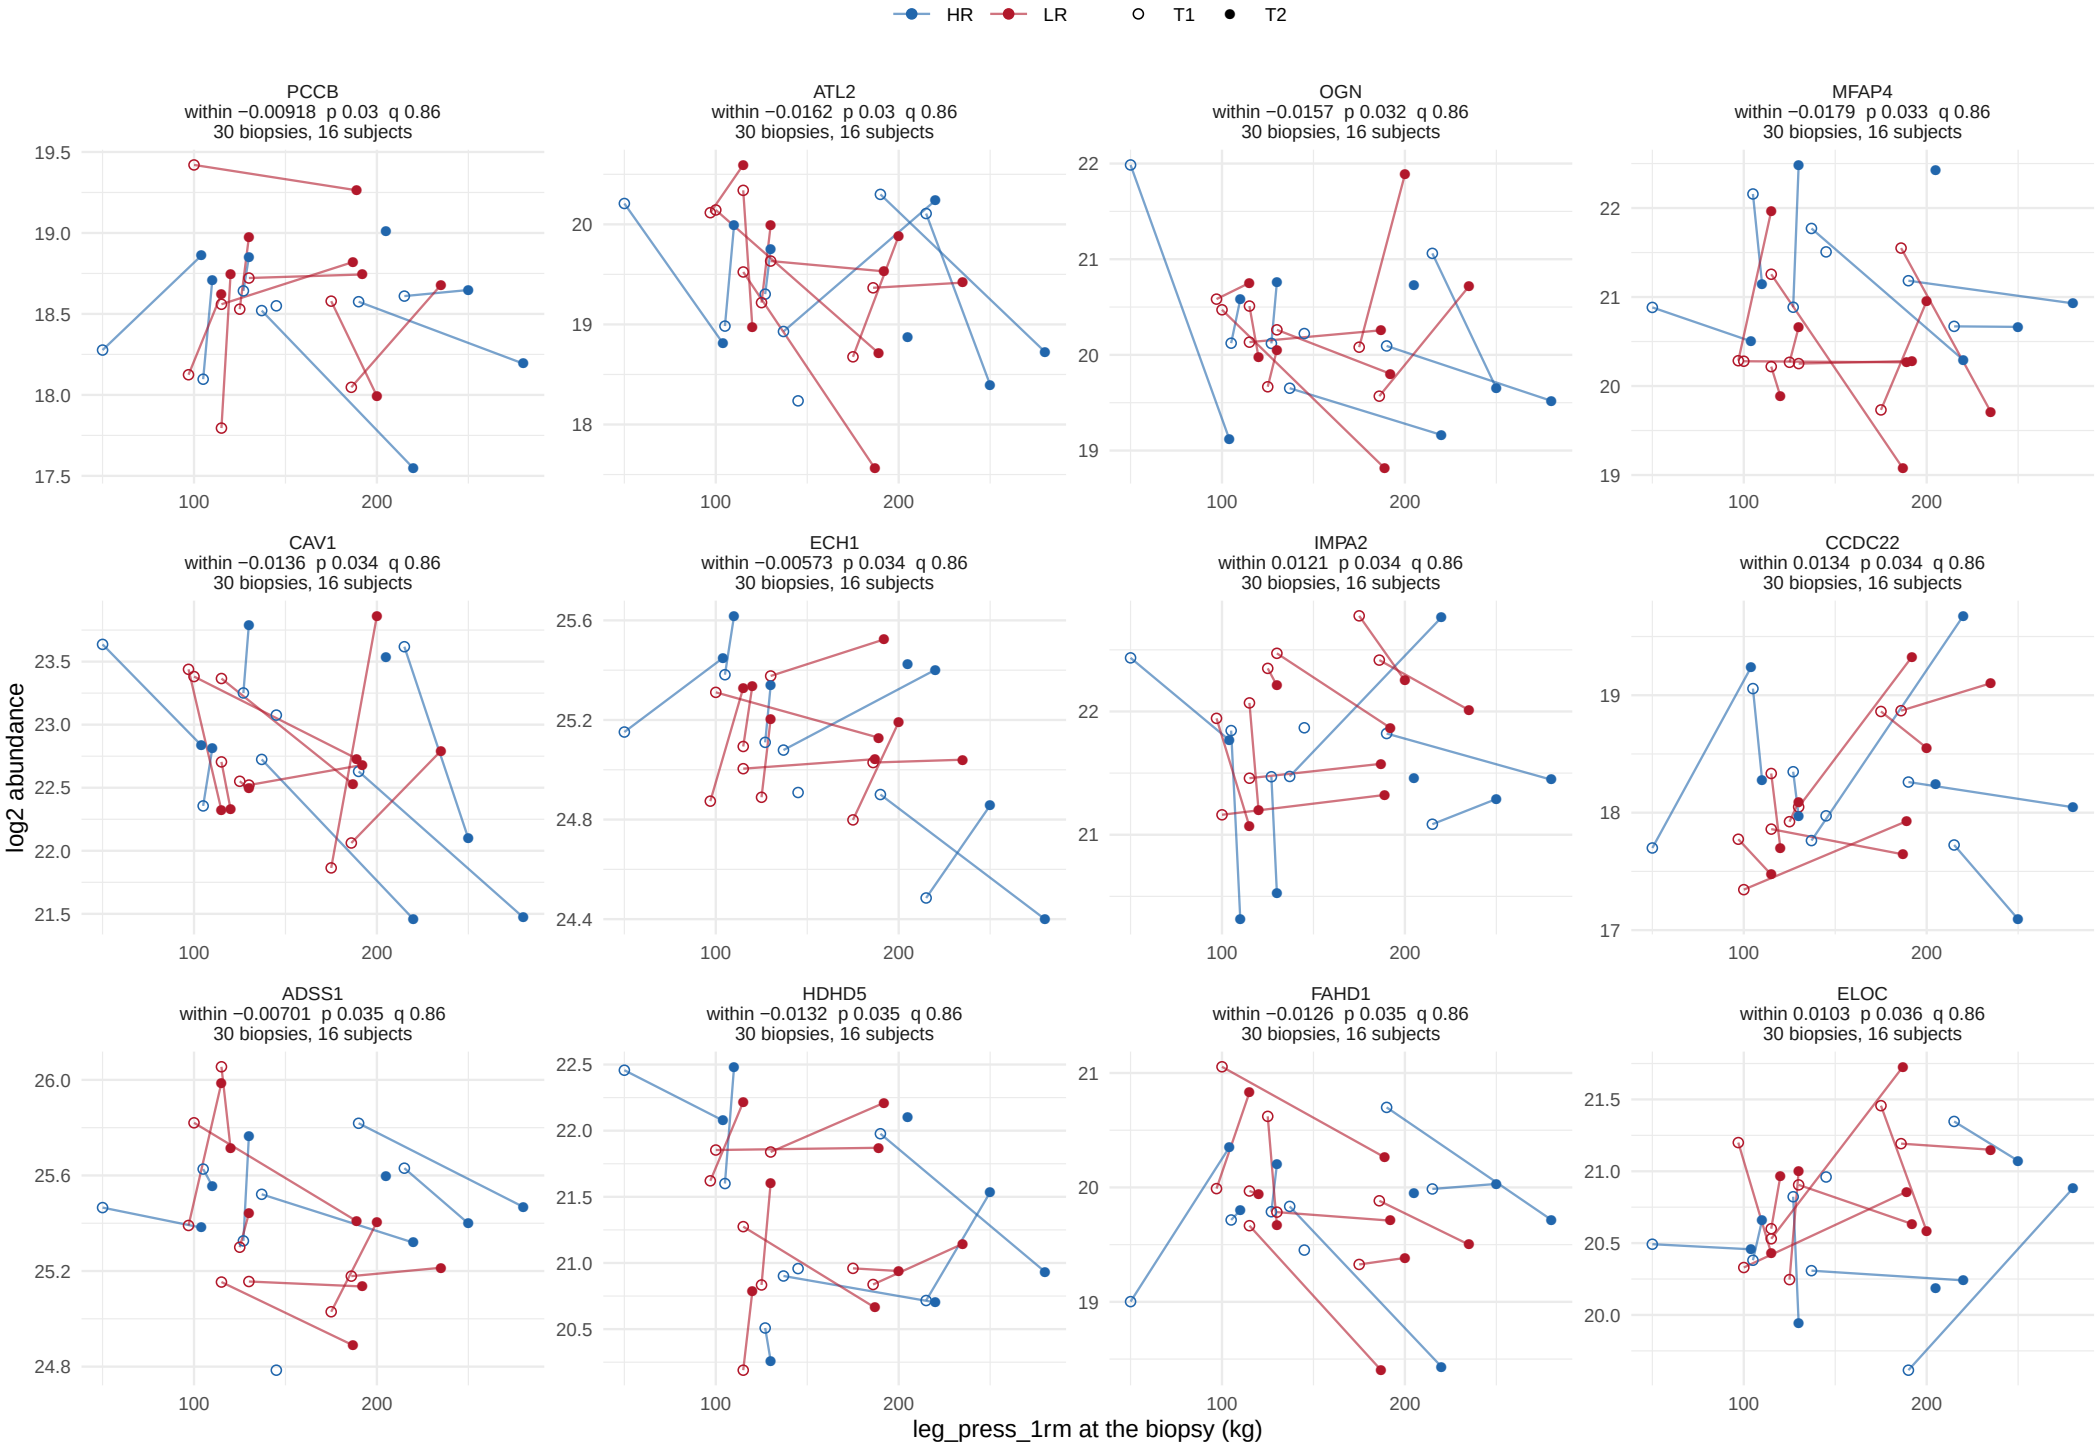

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_press_1rm, within−person term


100 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 7 of 9.

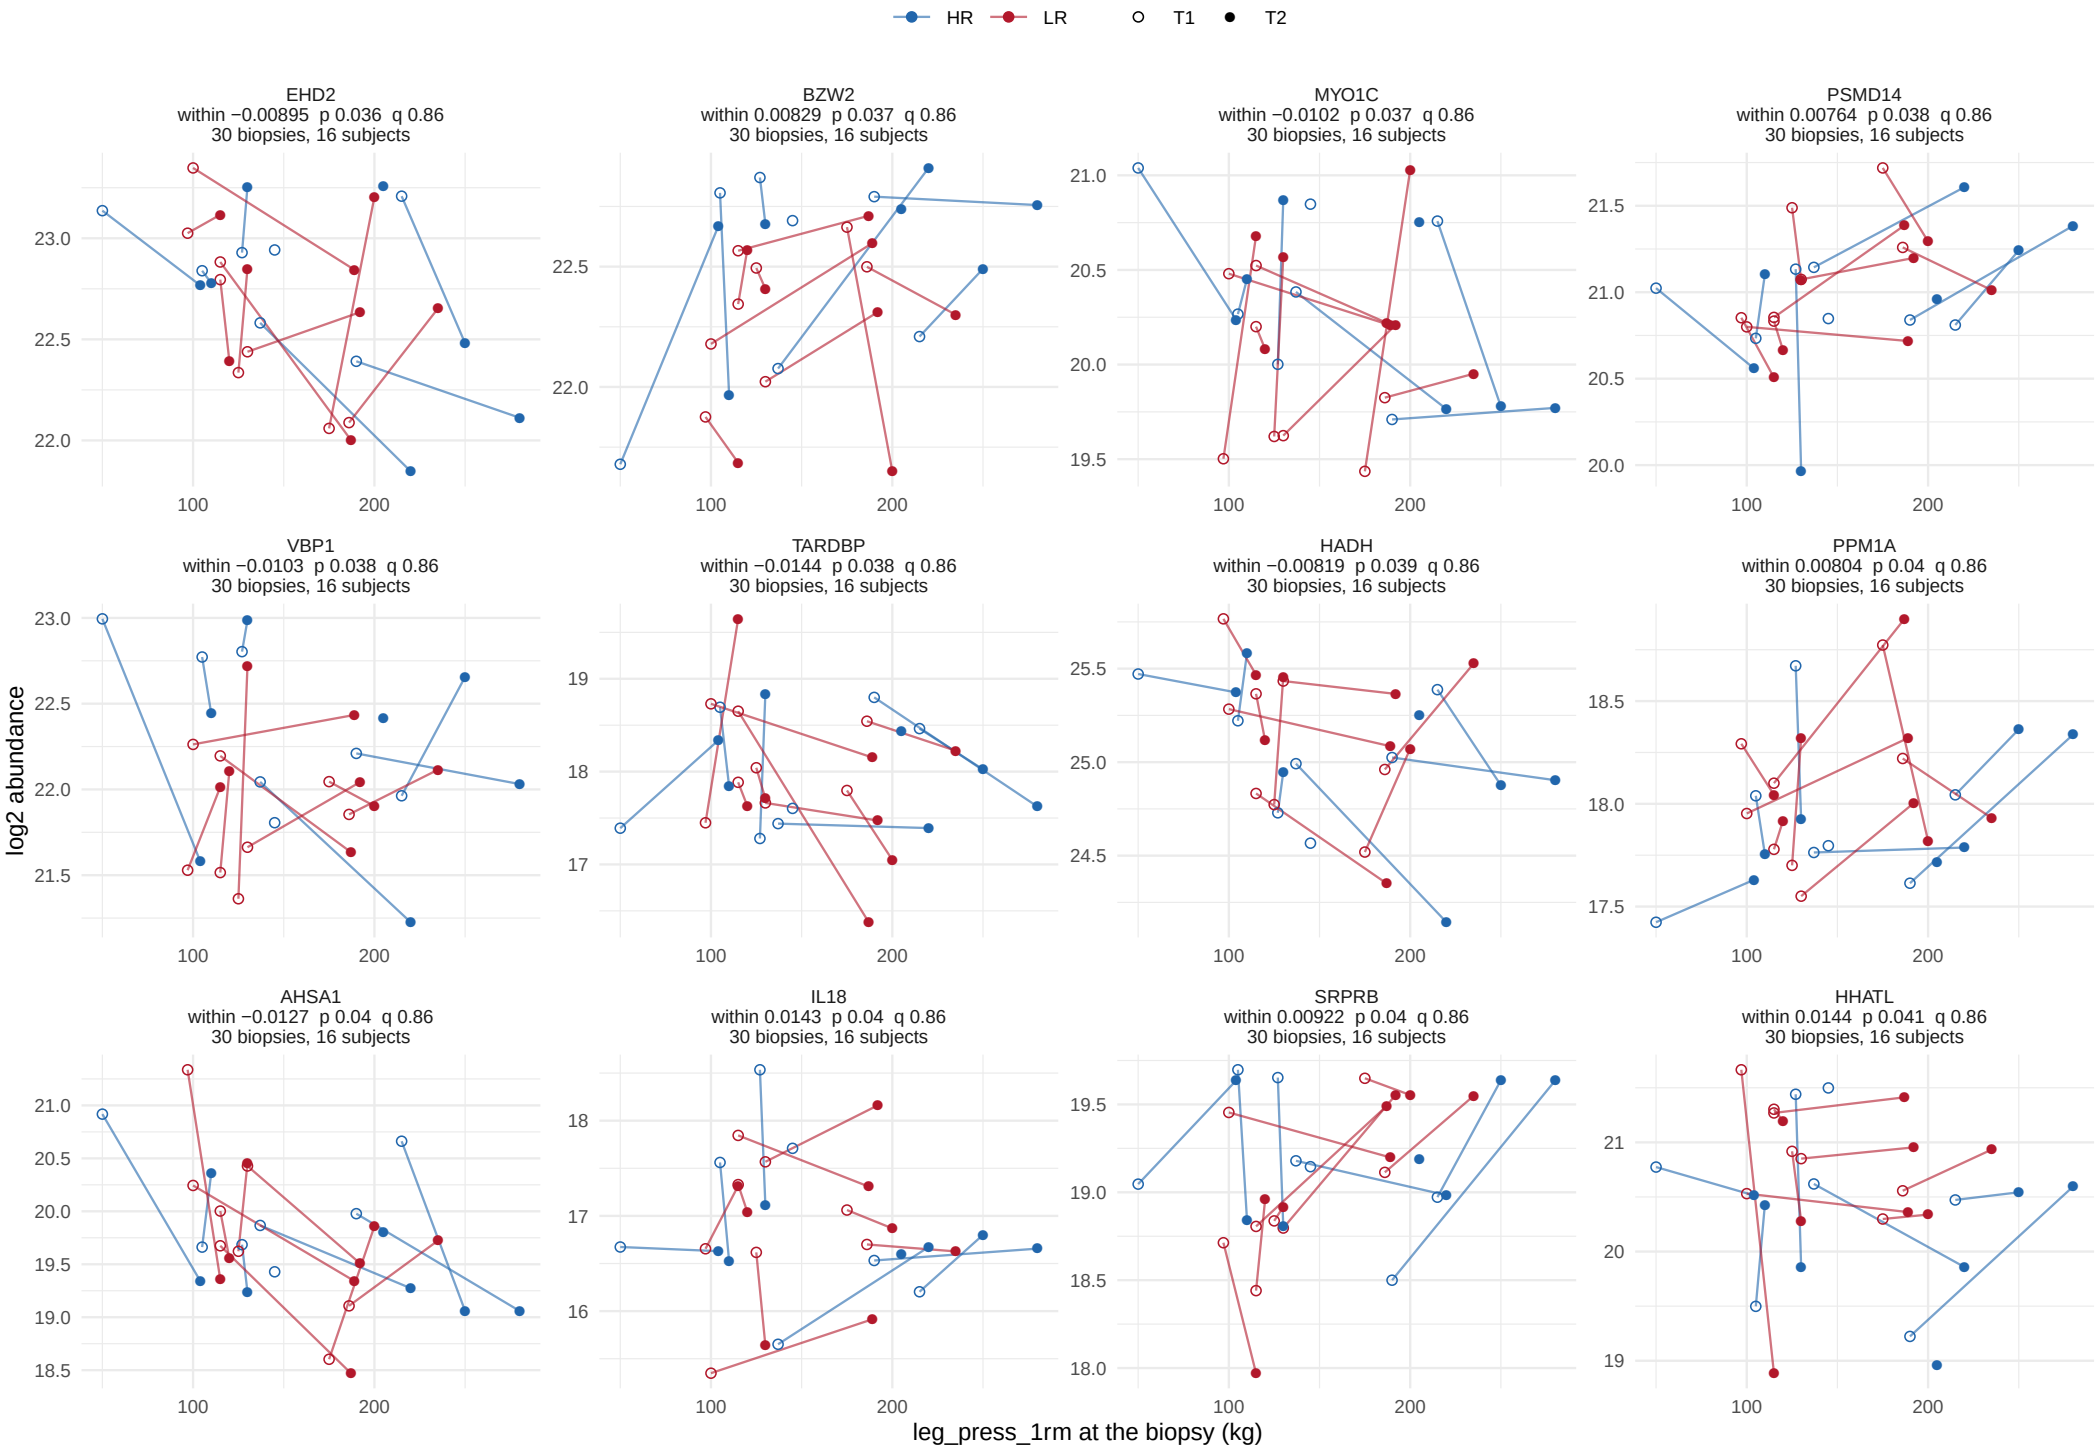

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_press_1rm, within−person term


100 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 8 of 9.

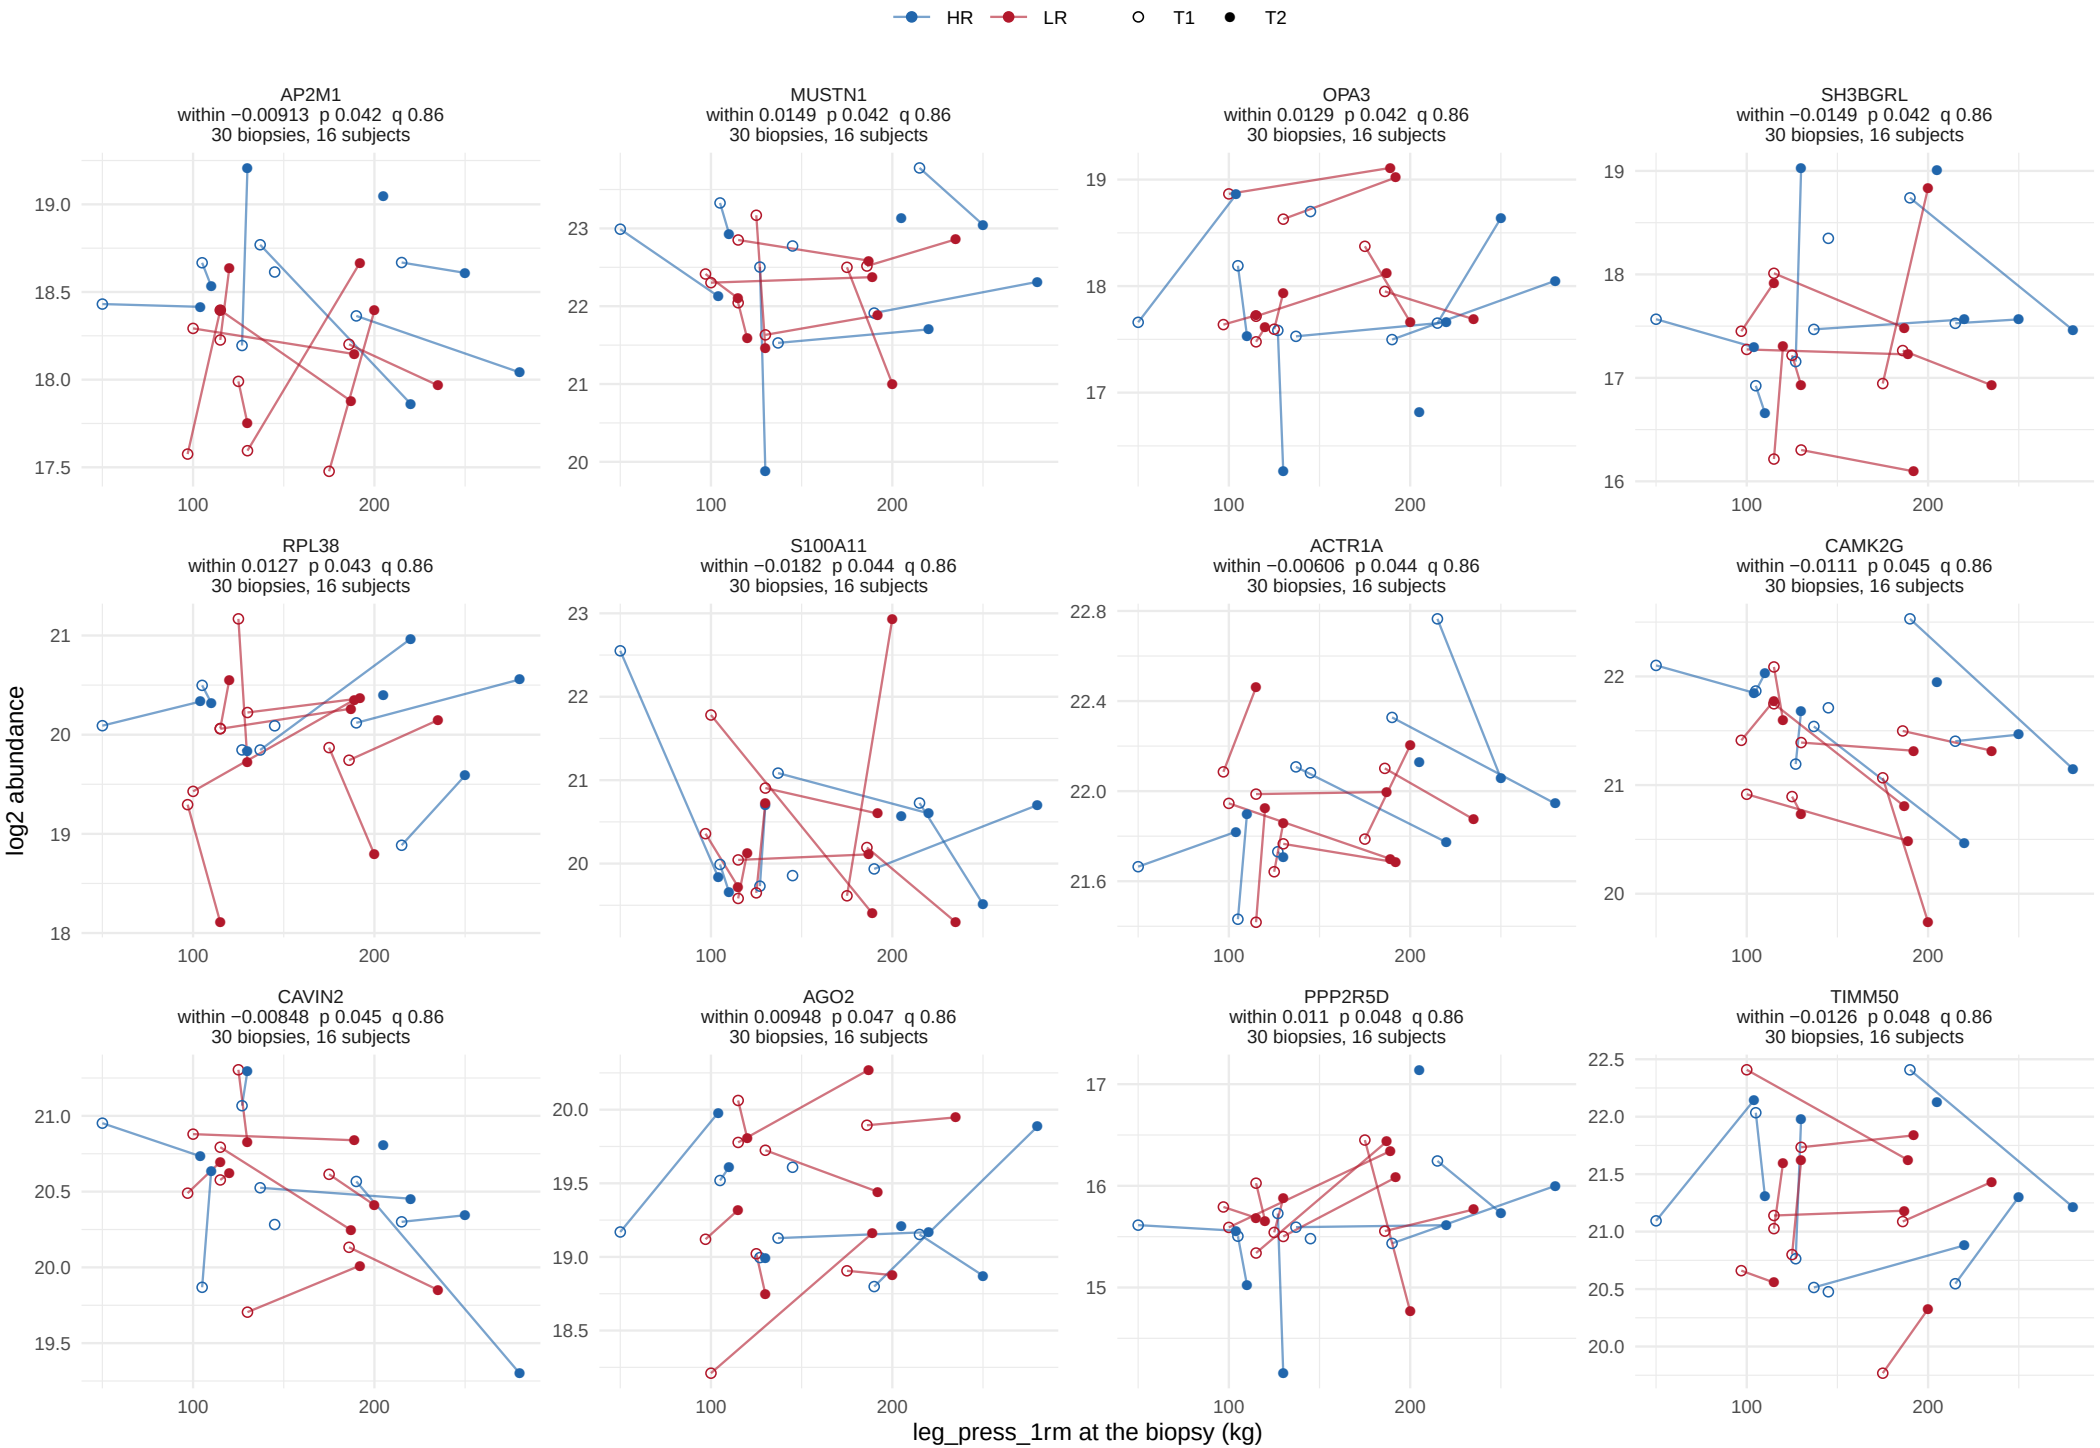

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_press_1rm, within−person term


100 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 9 of 9.

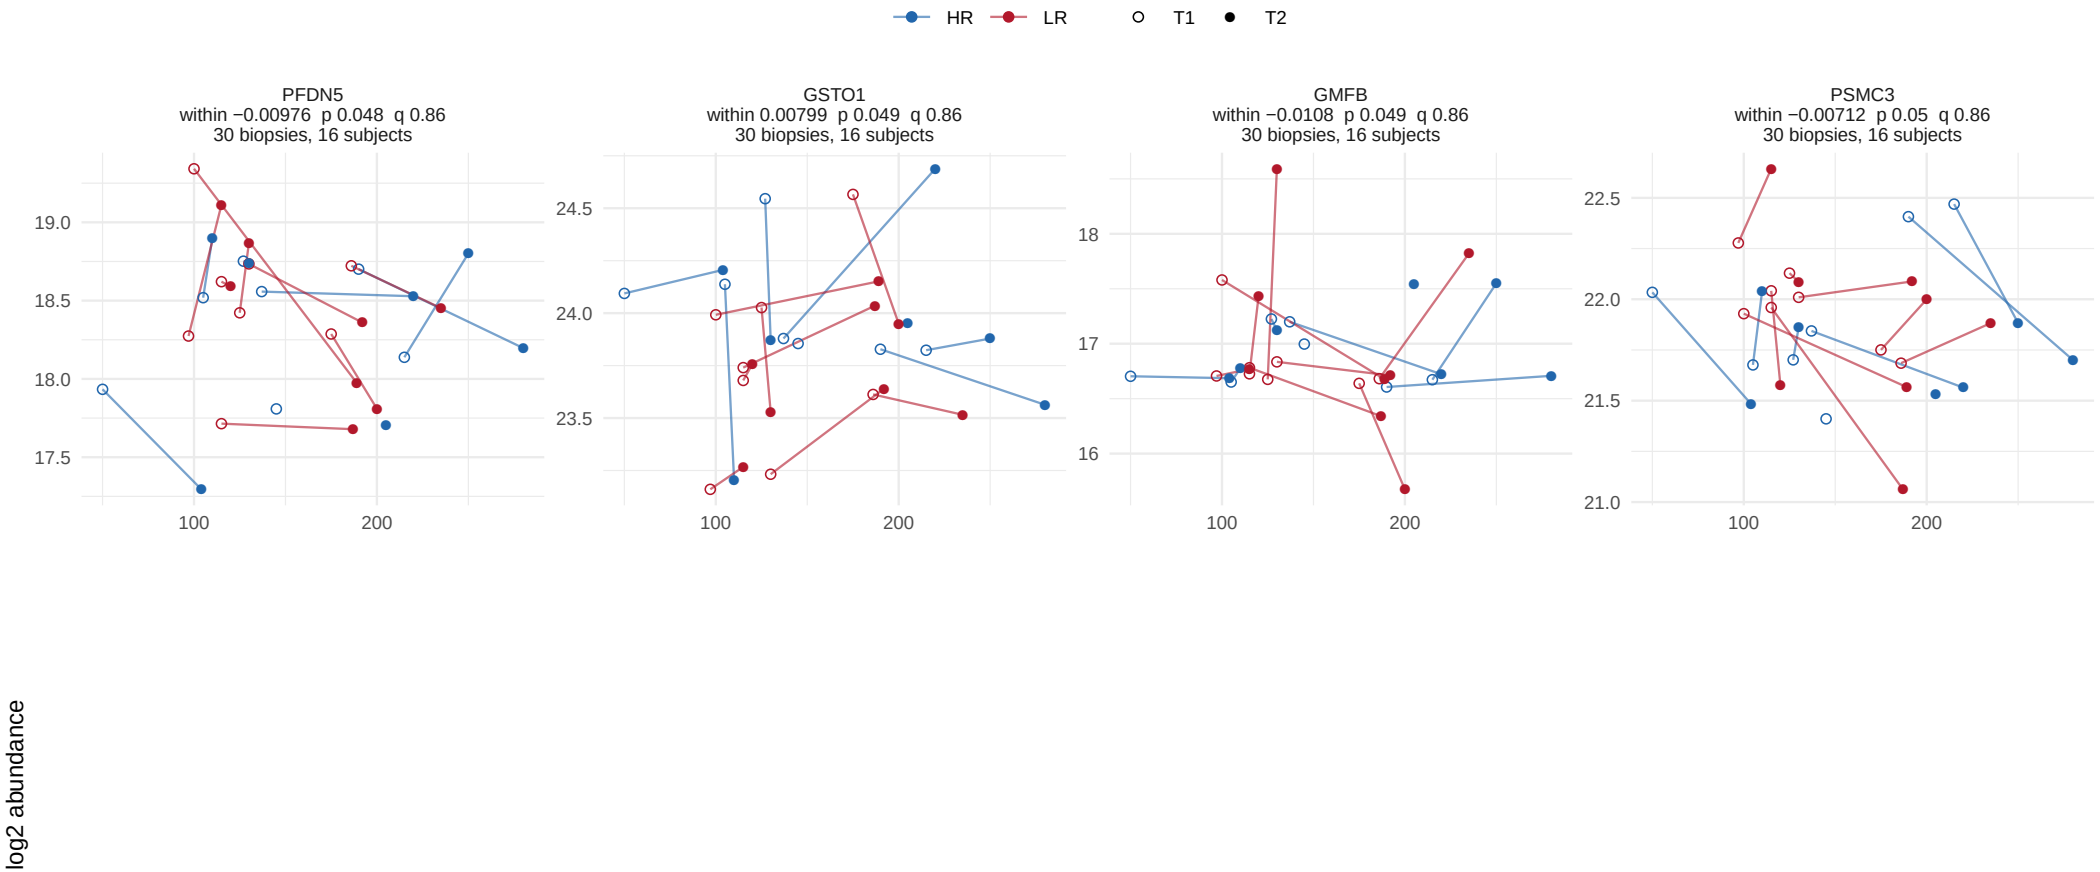

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_press_1rm, between−person term


131 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 1 of 11.

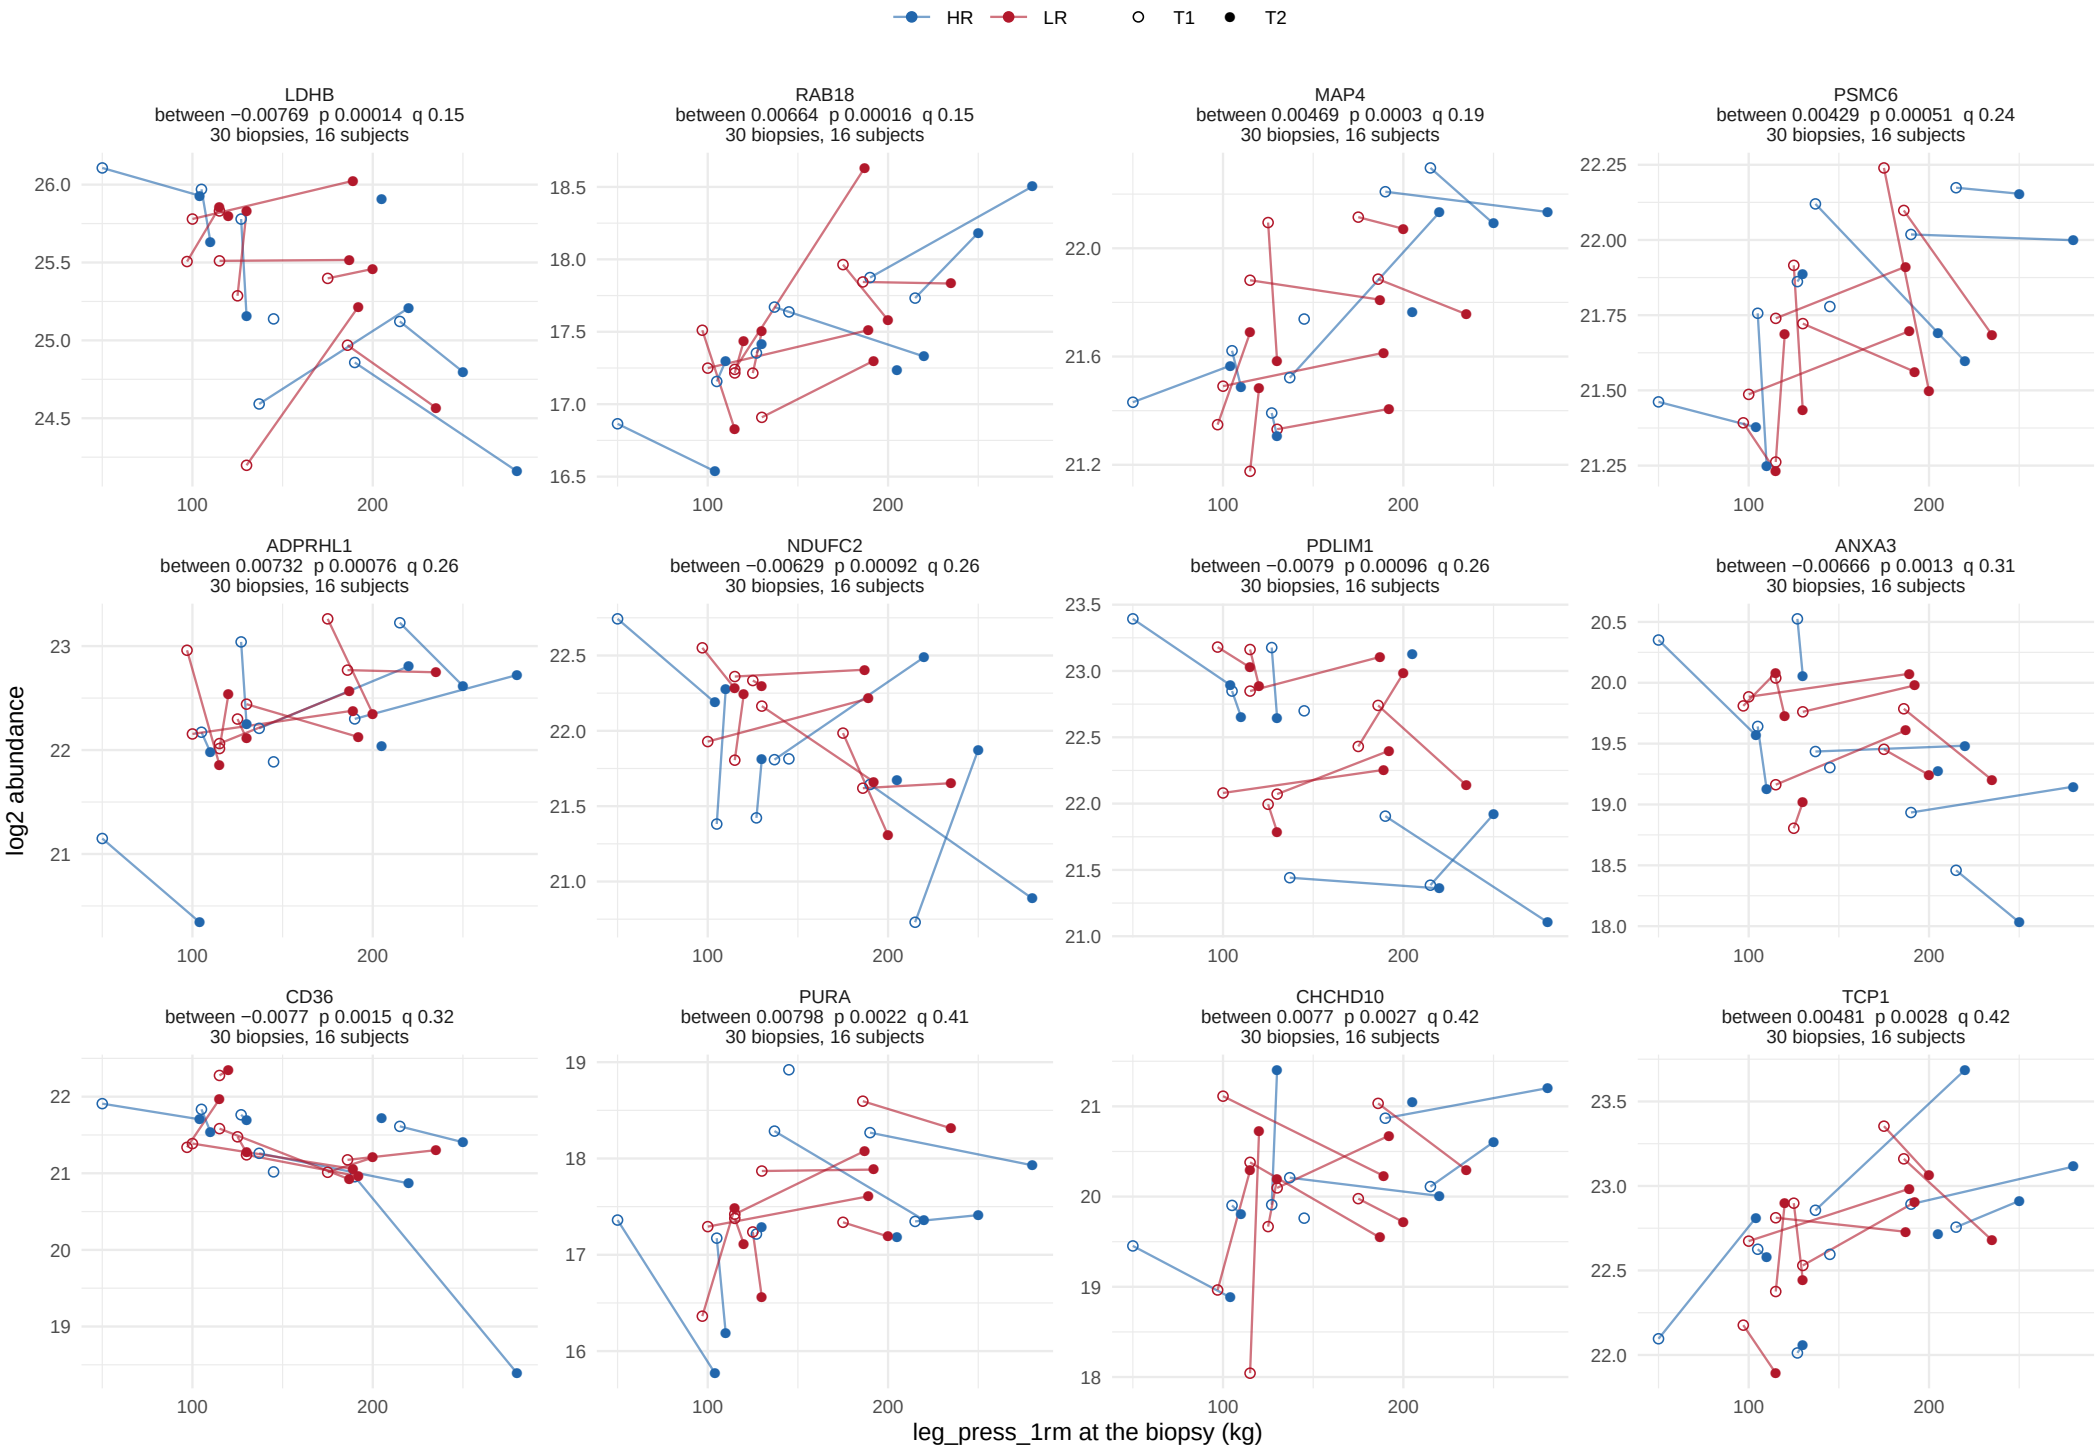

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_press_1rm, between−person term


131 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 2 of 11.

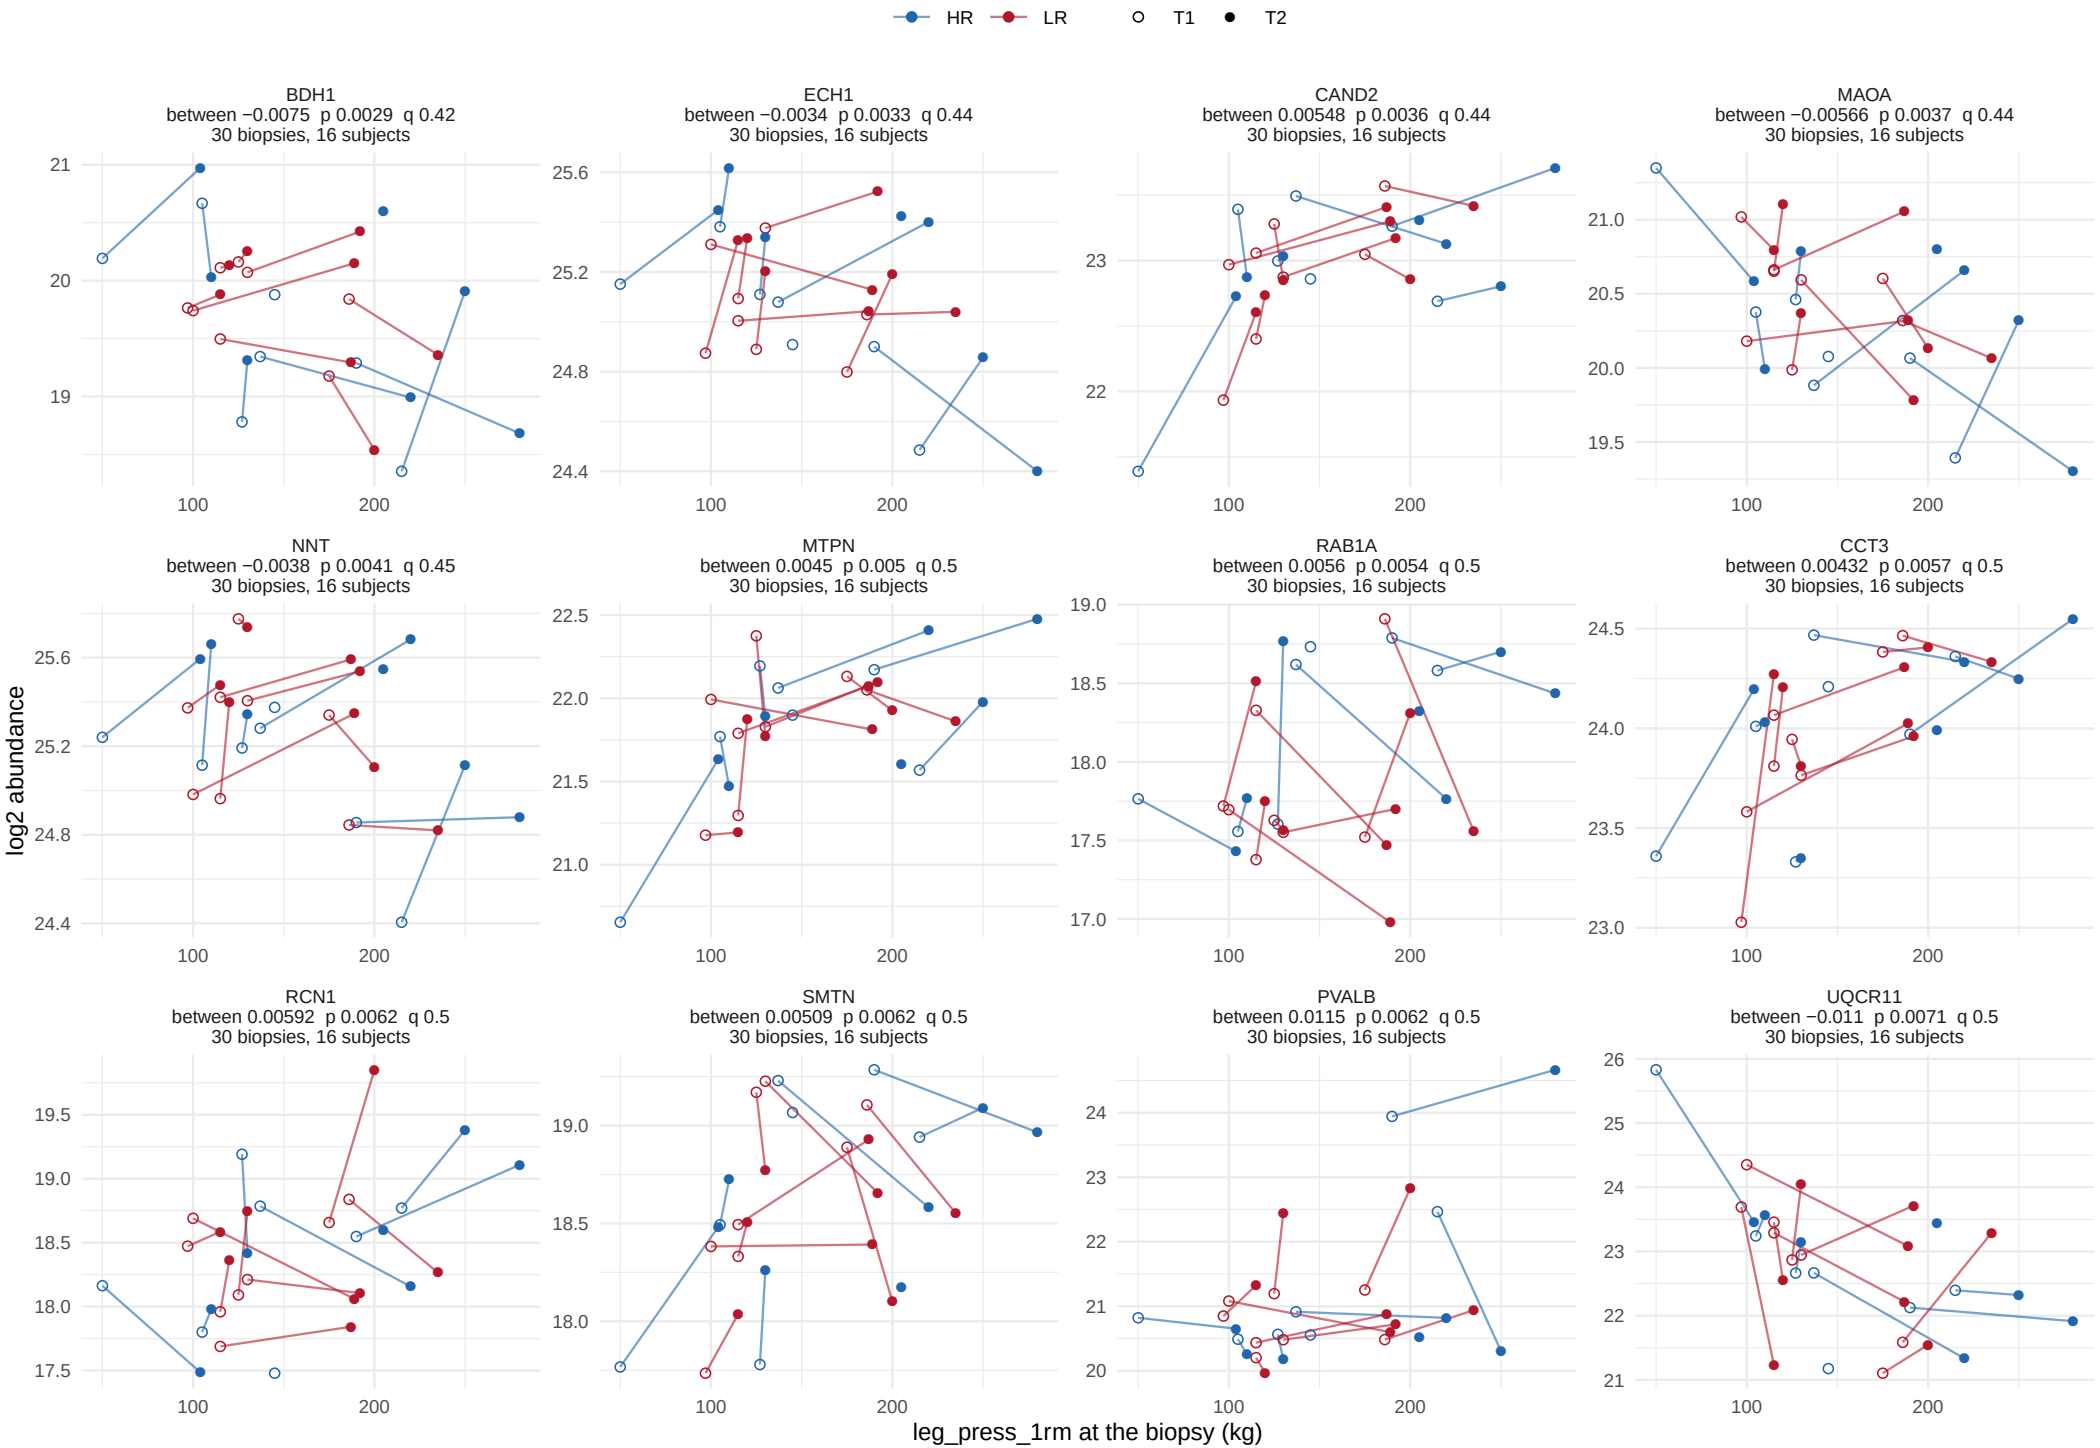

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_press_1rm, between−person term


131 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 3 of 11.

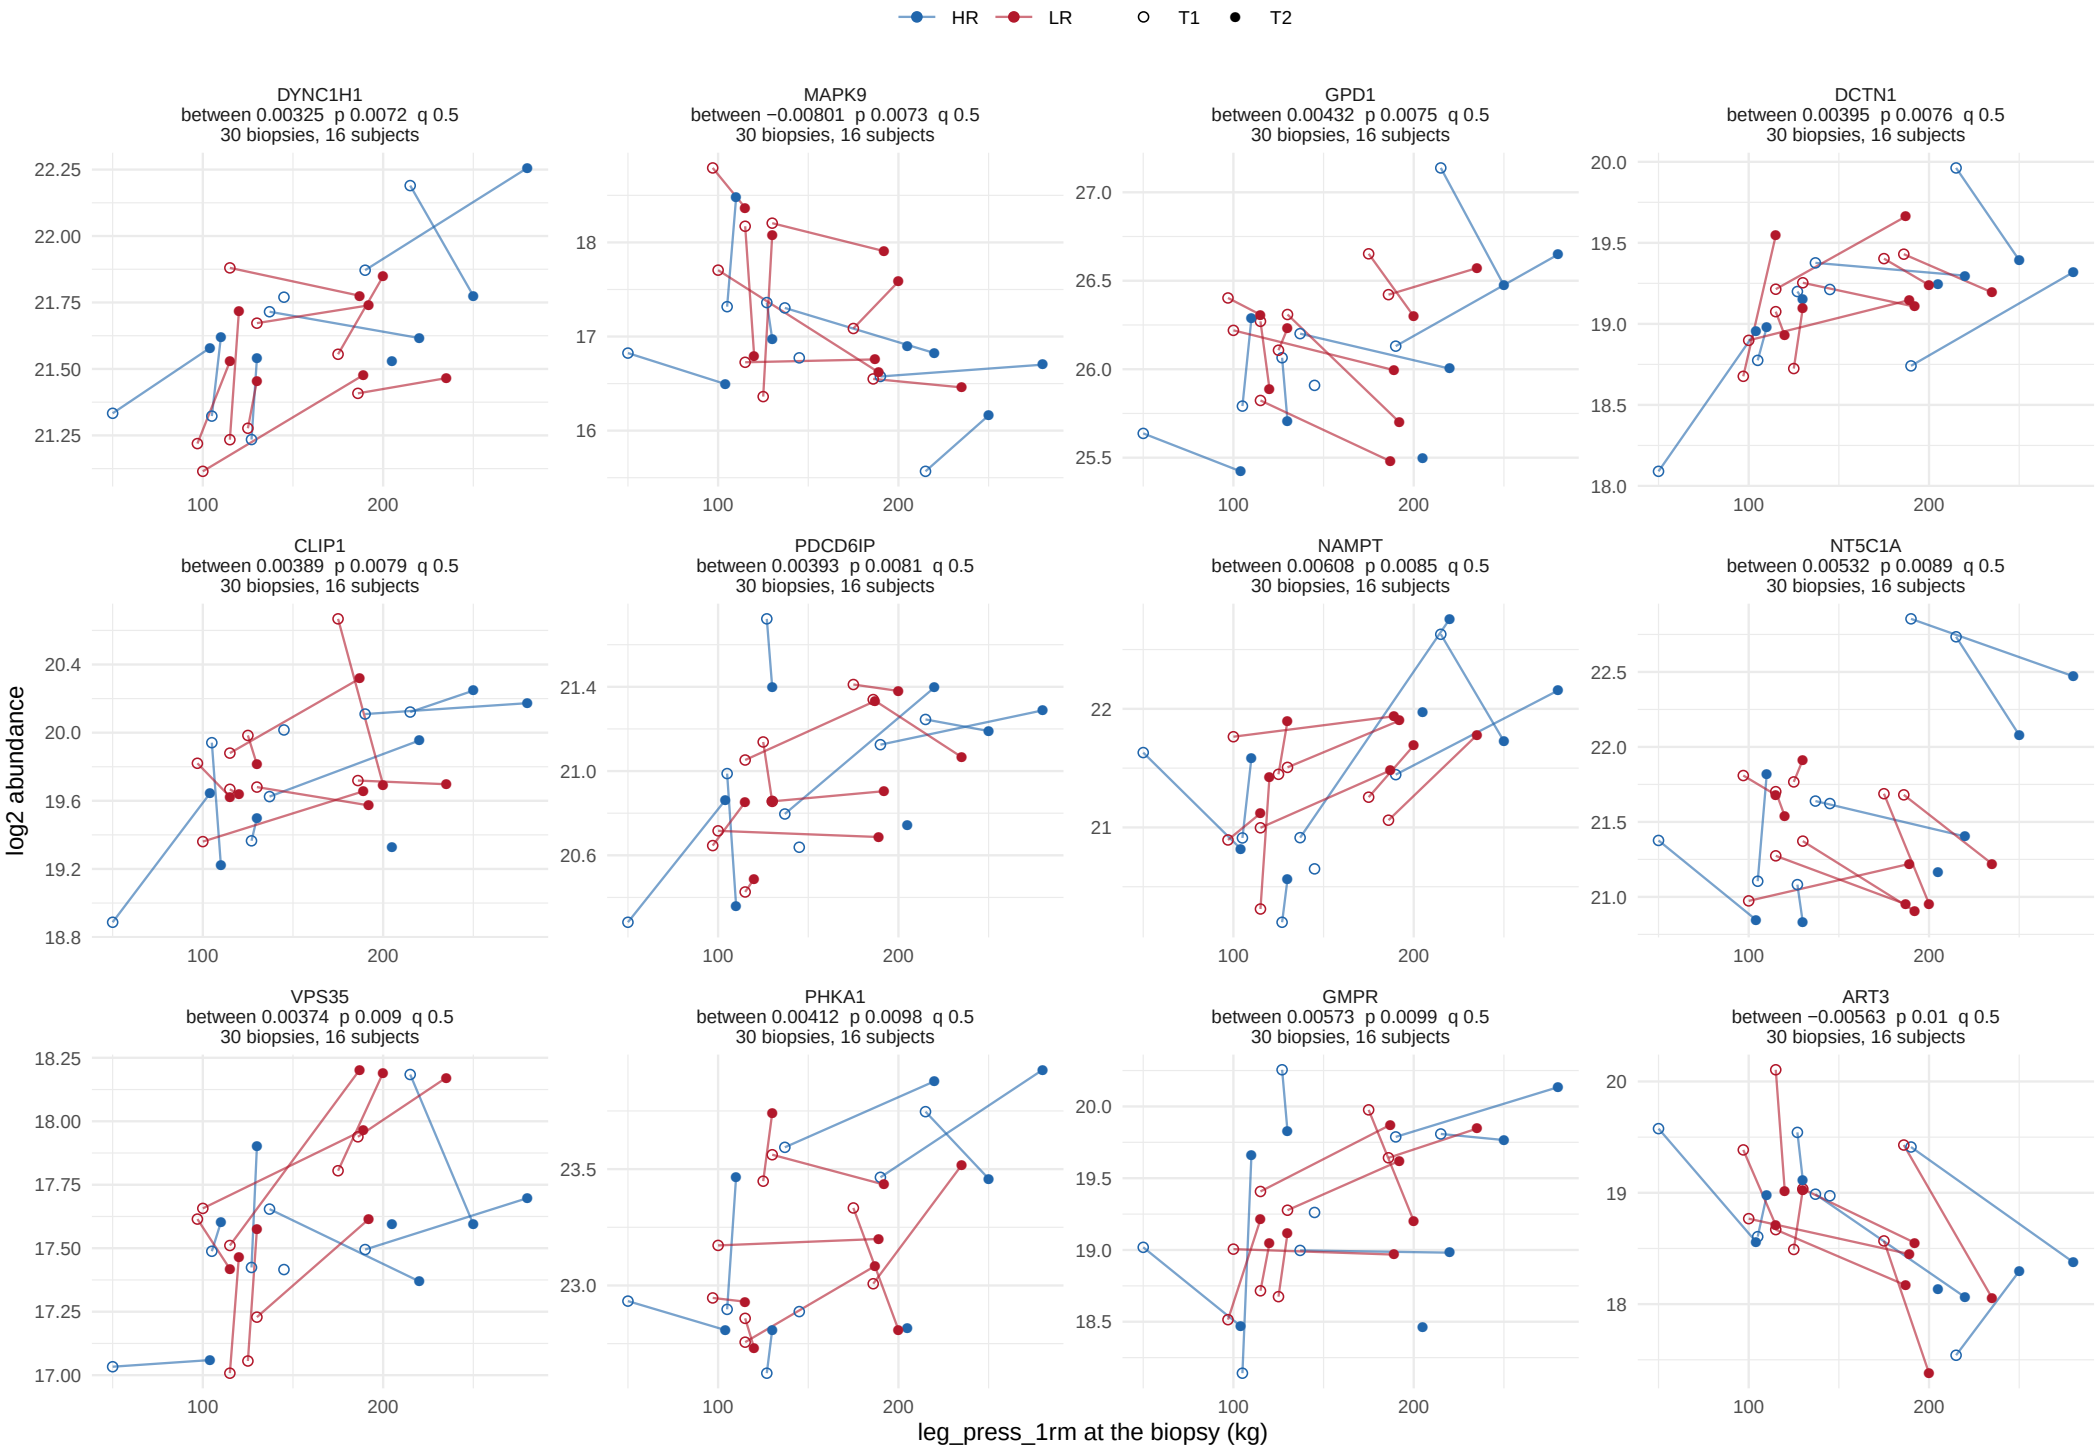

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_press_1rm, between−person term


131 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 4 of 11.

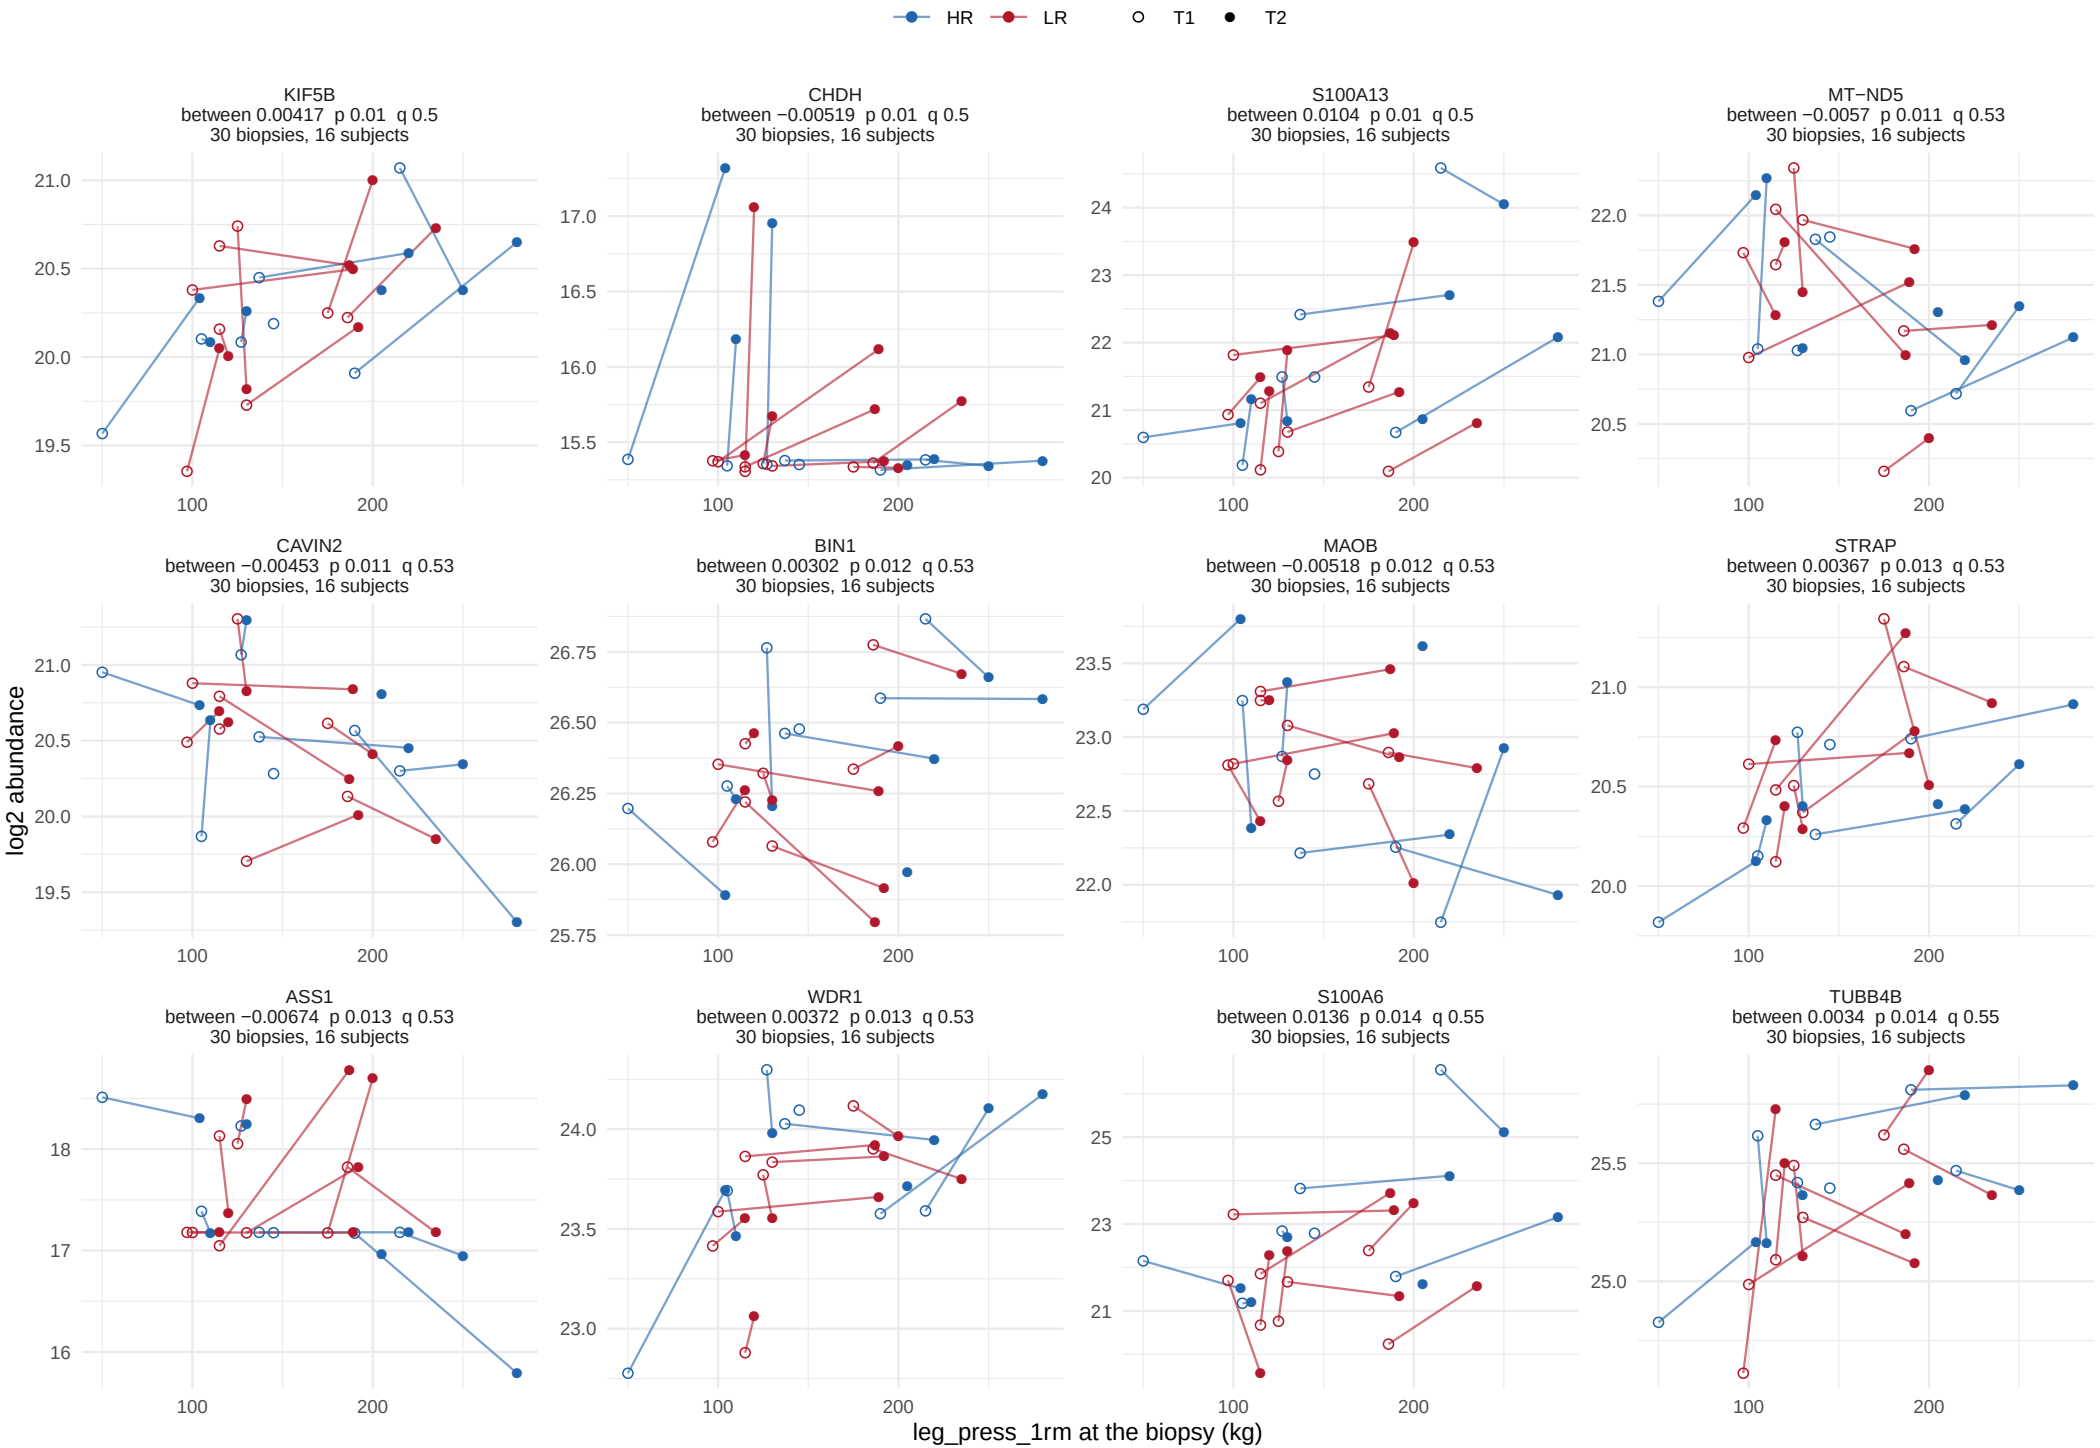

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_press_1rm, between−person term


131 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 5 of 11.

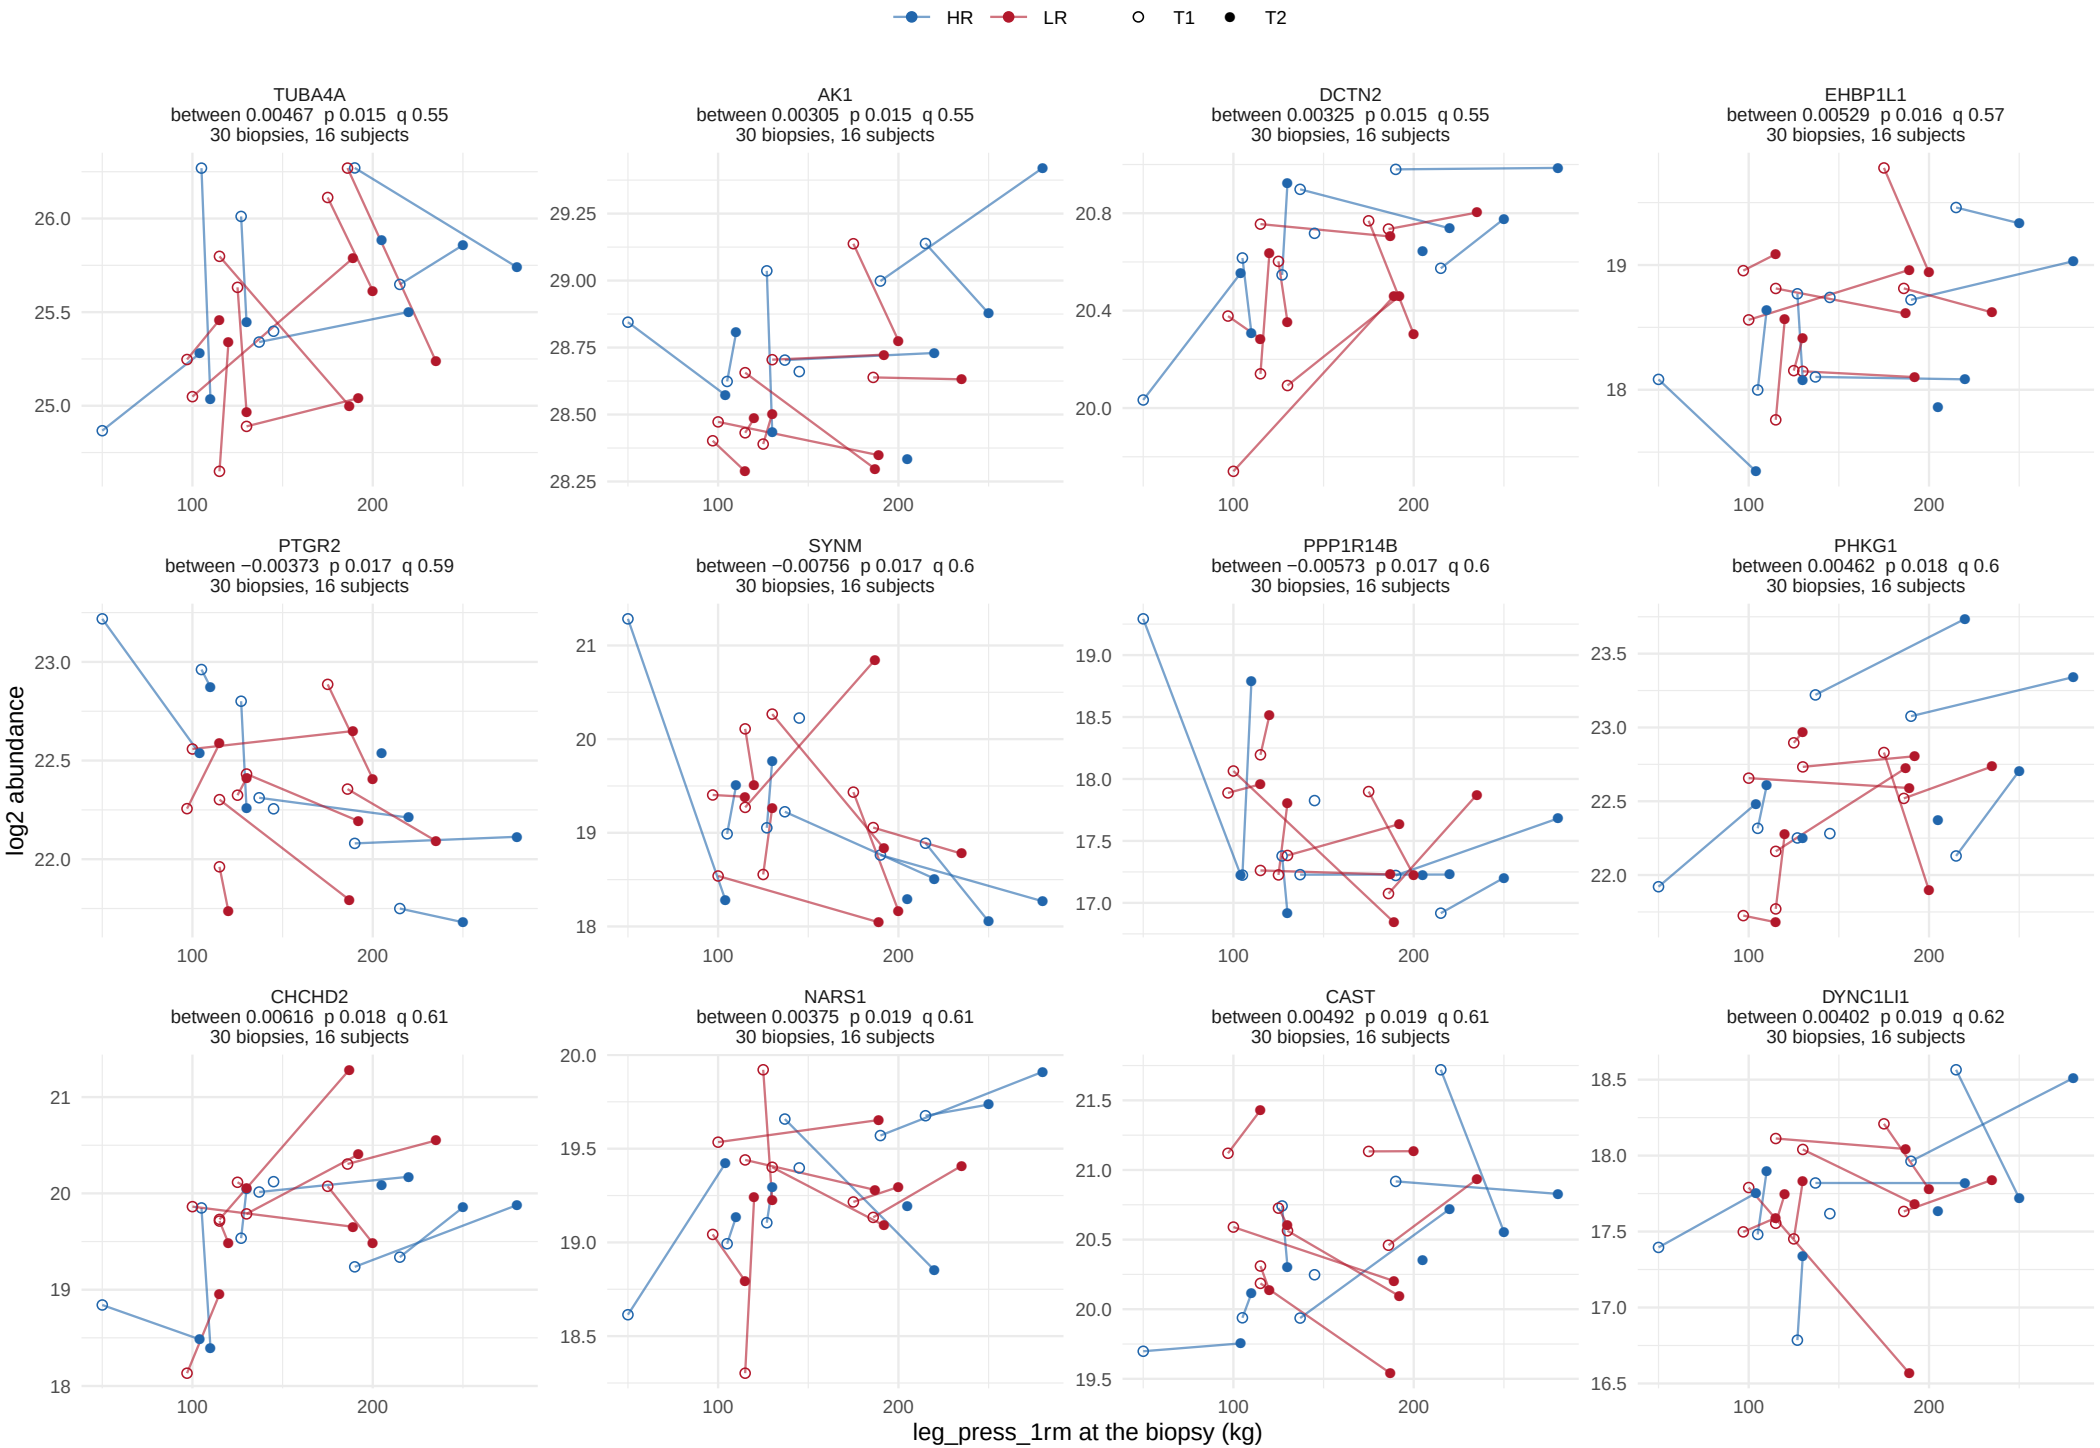

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_press_1rm, between−person term


131 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 6 of 11.

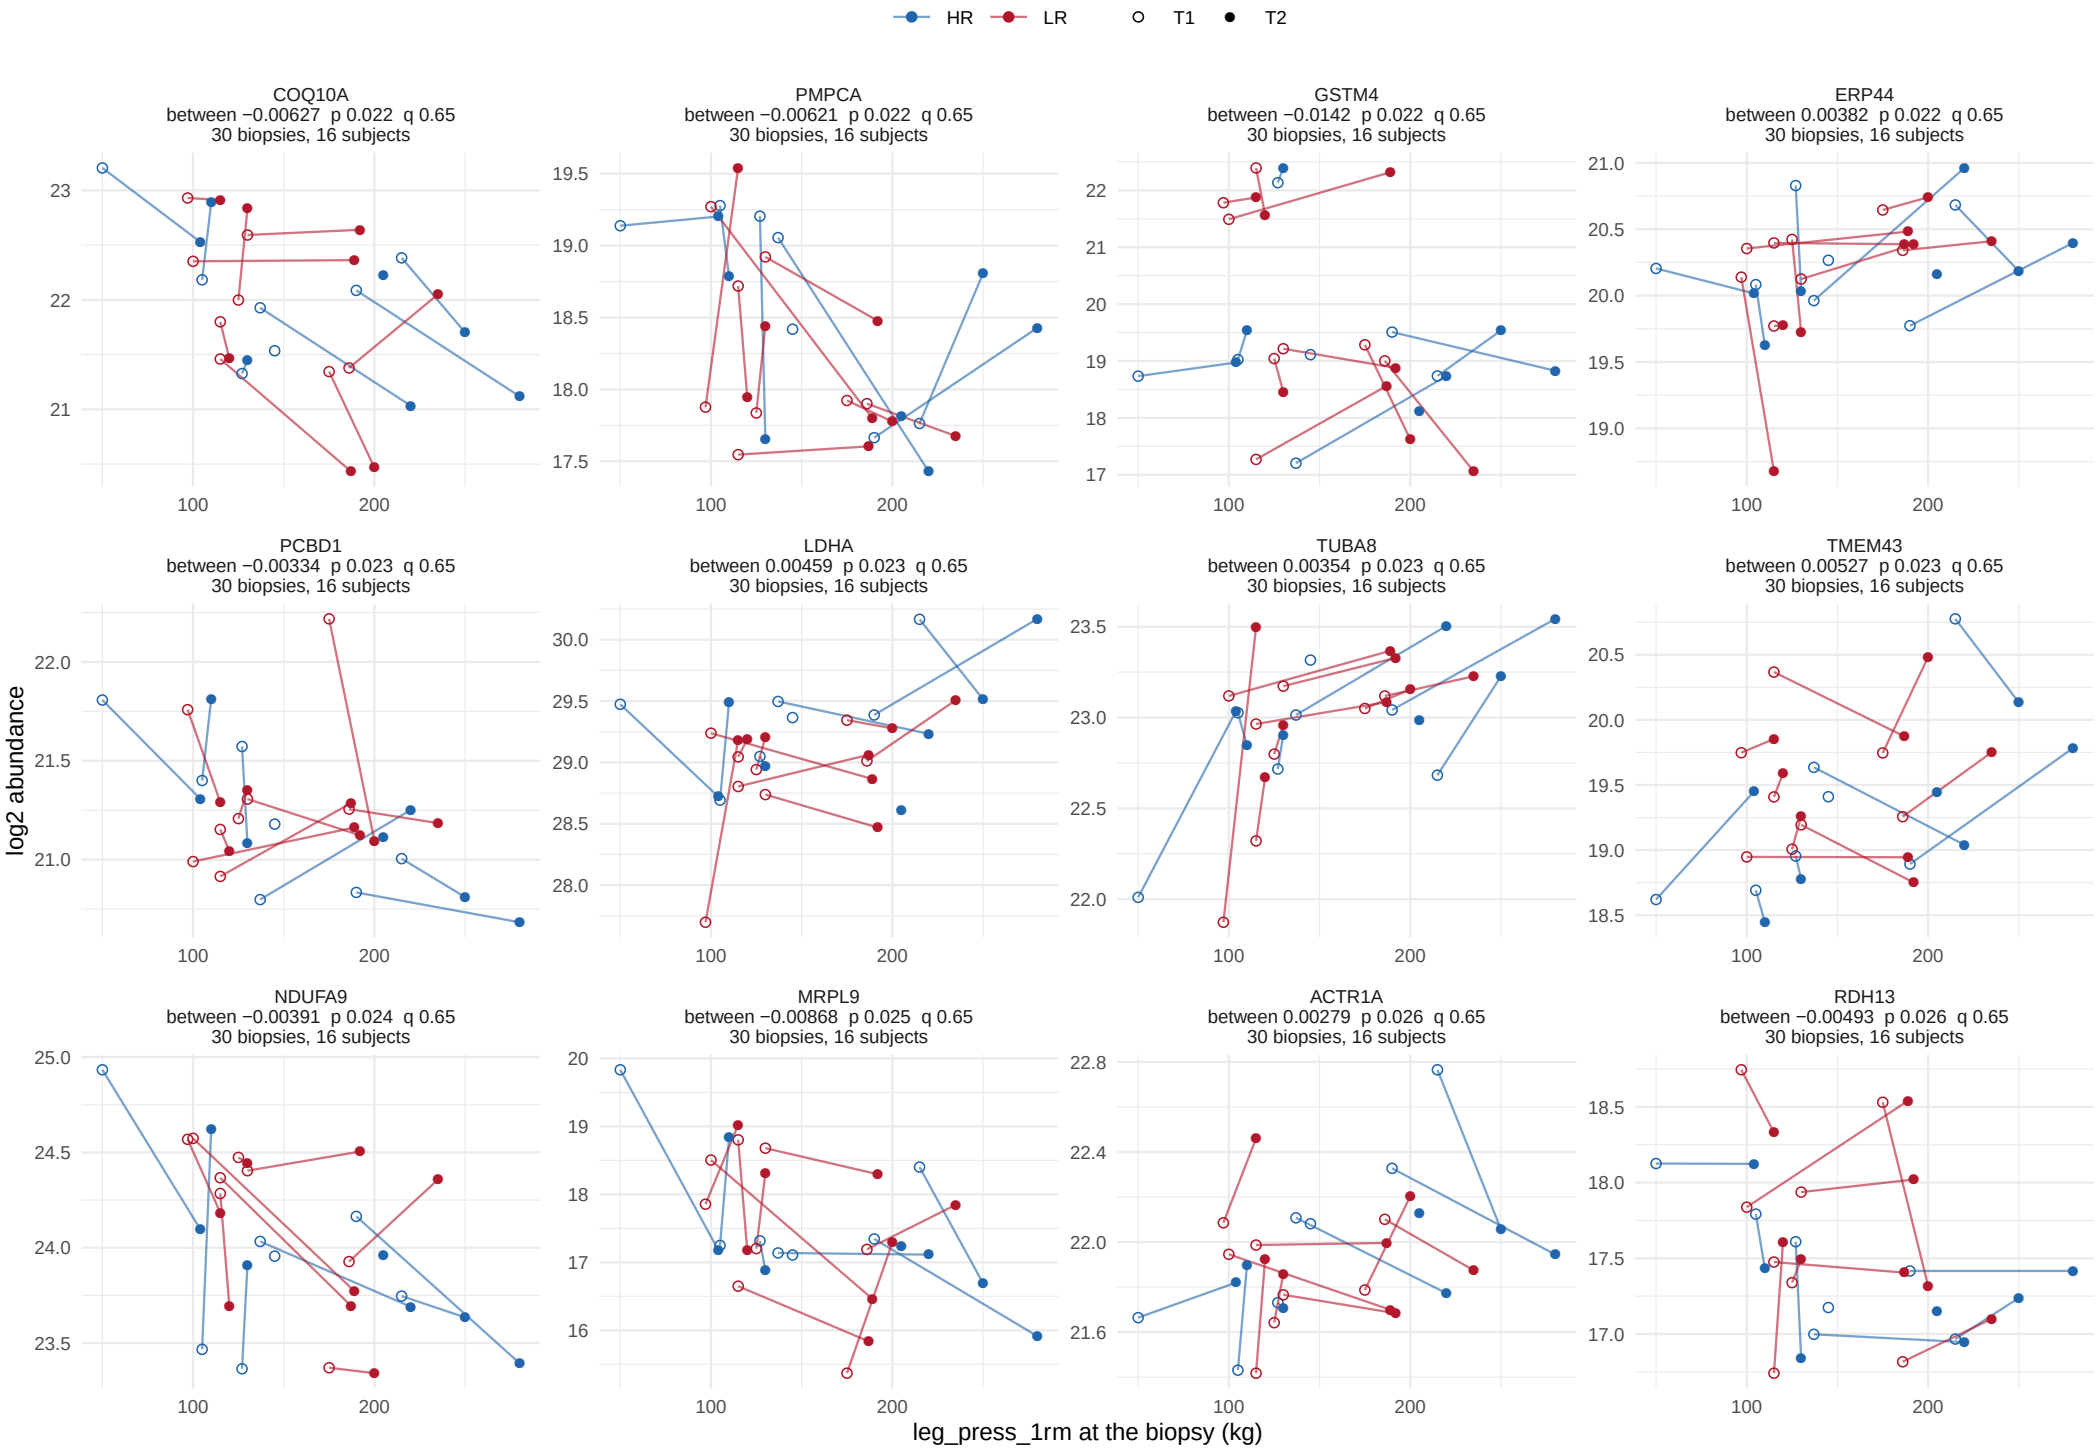

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_press_1rm, between−person term


131 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 7 of 11.

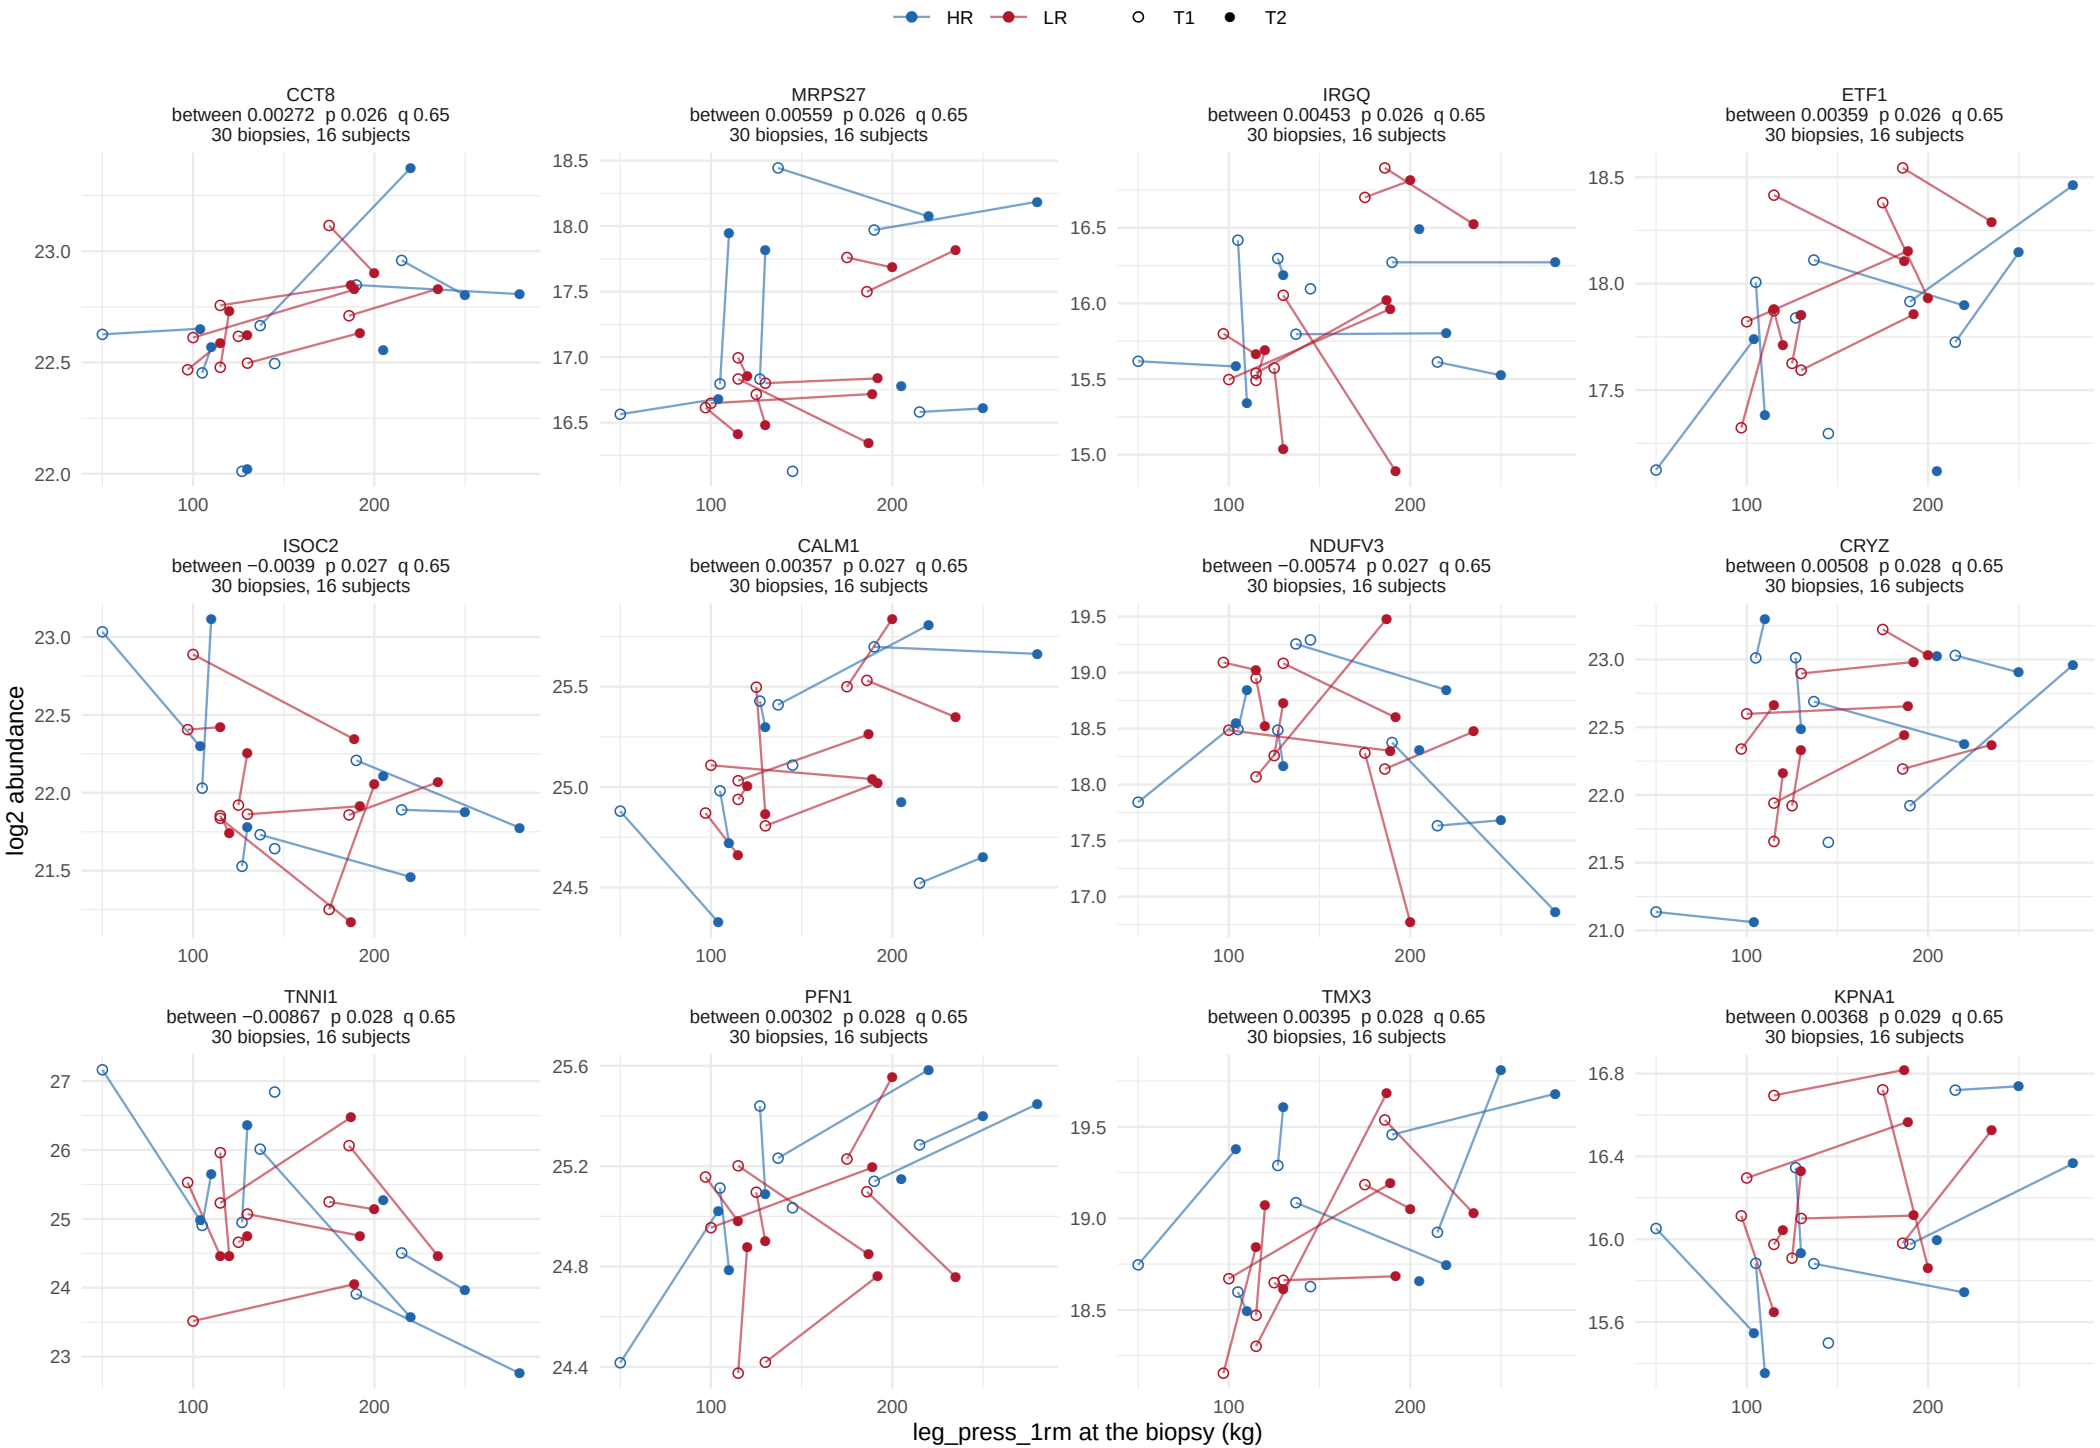

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_press_1rm, between−person term


131 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 8 of 11.

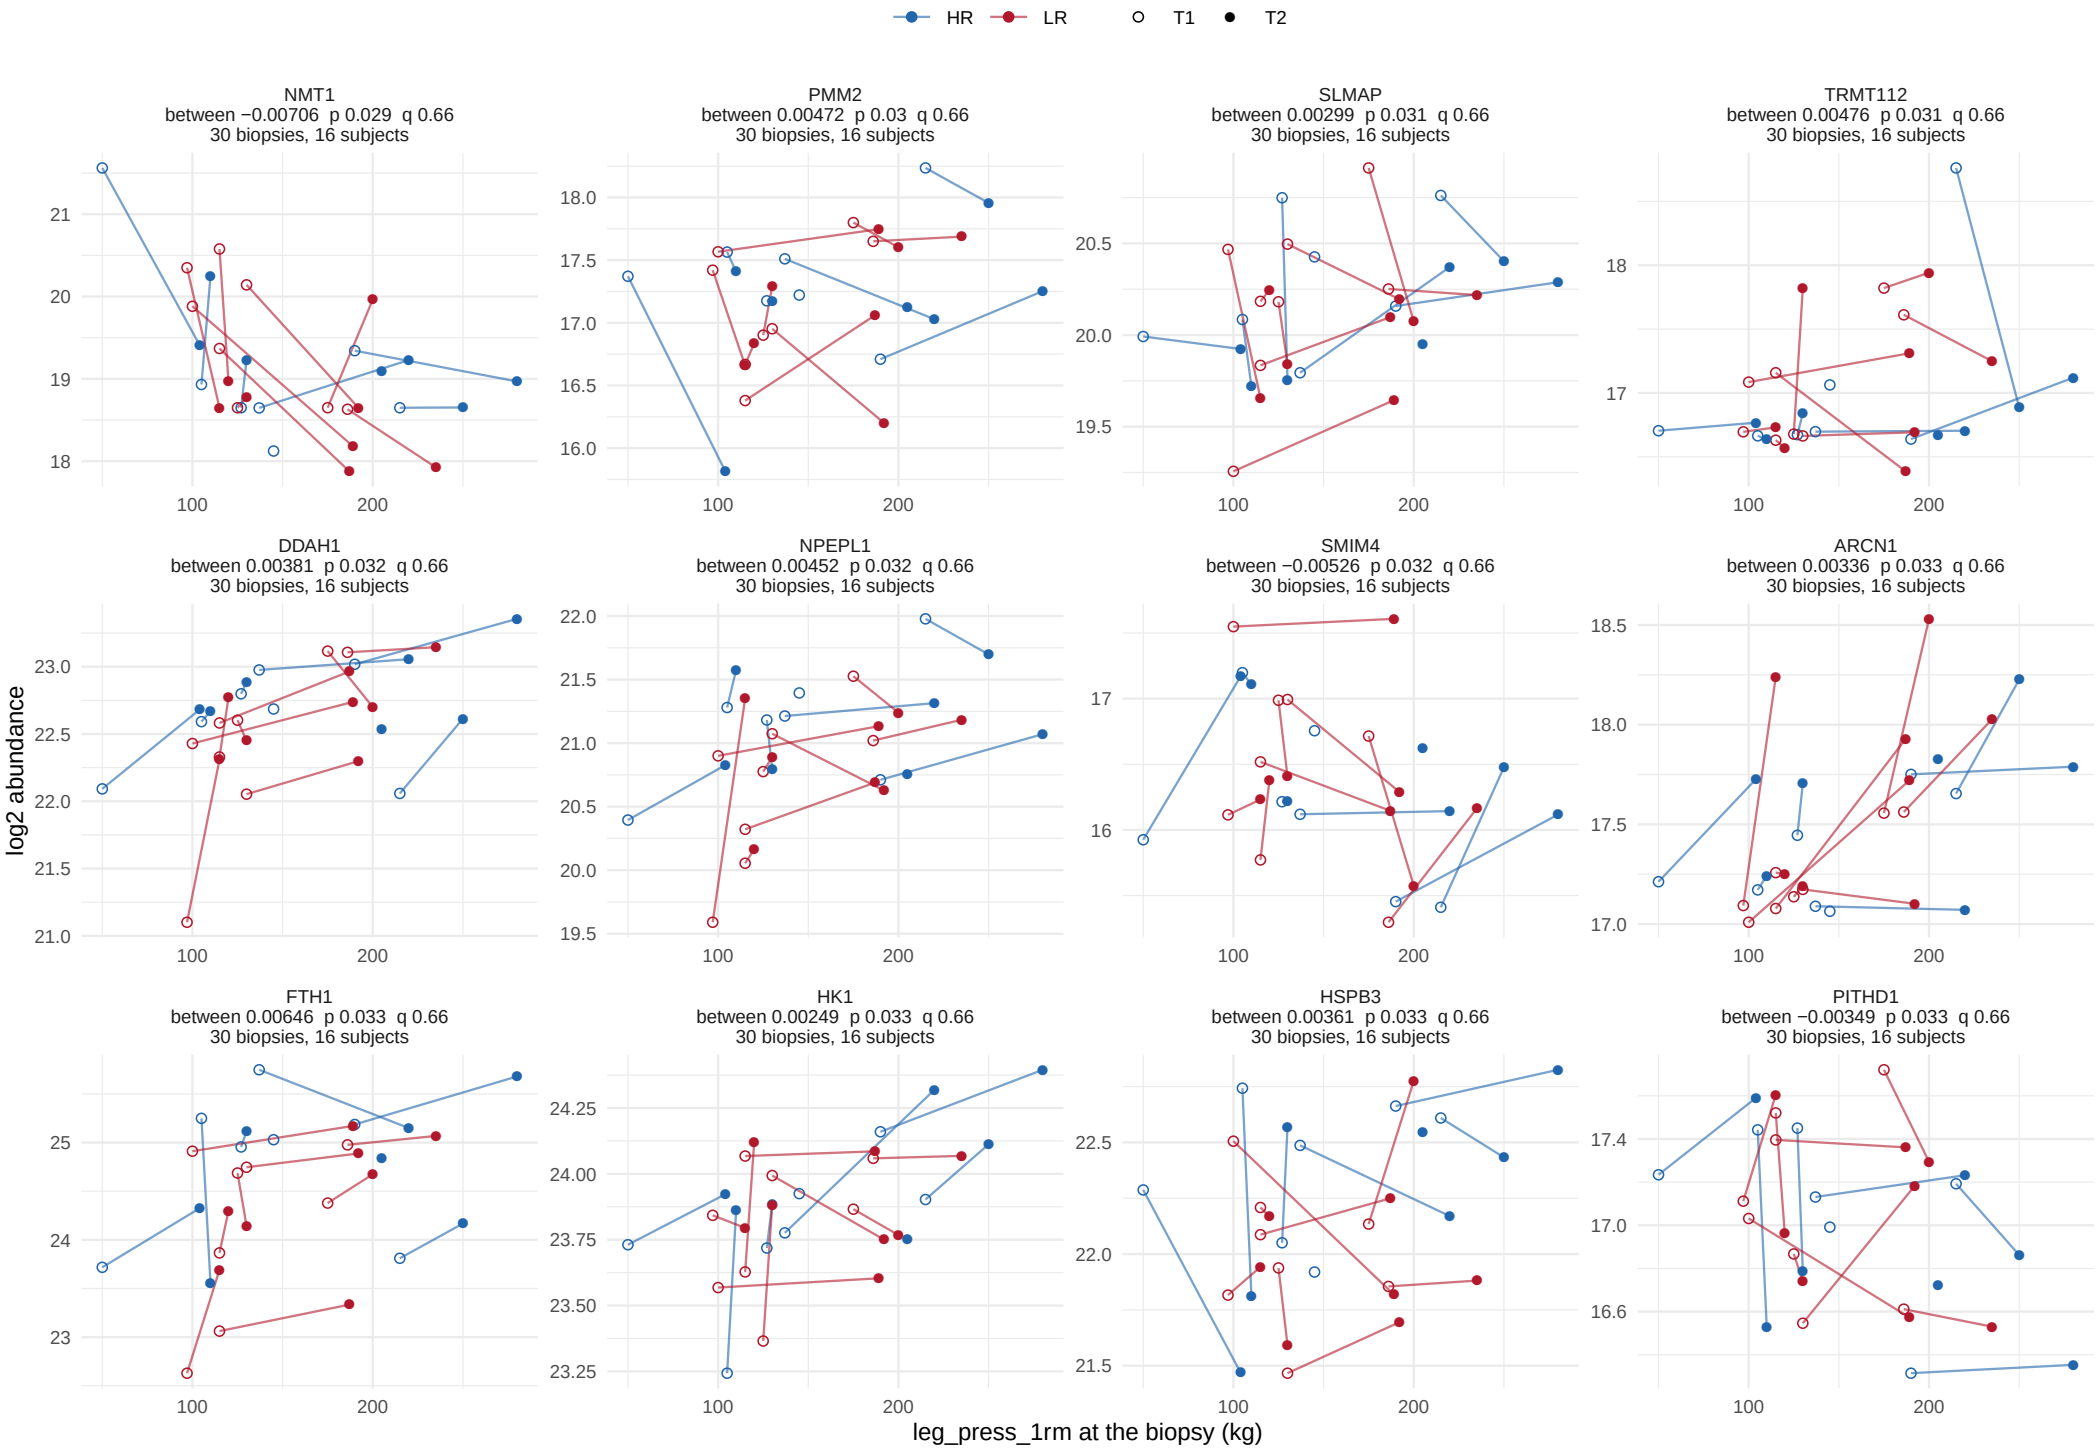

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_press_1rm, between−person term


131 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 9 of 11.

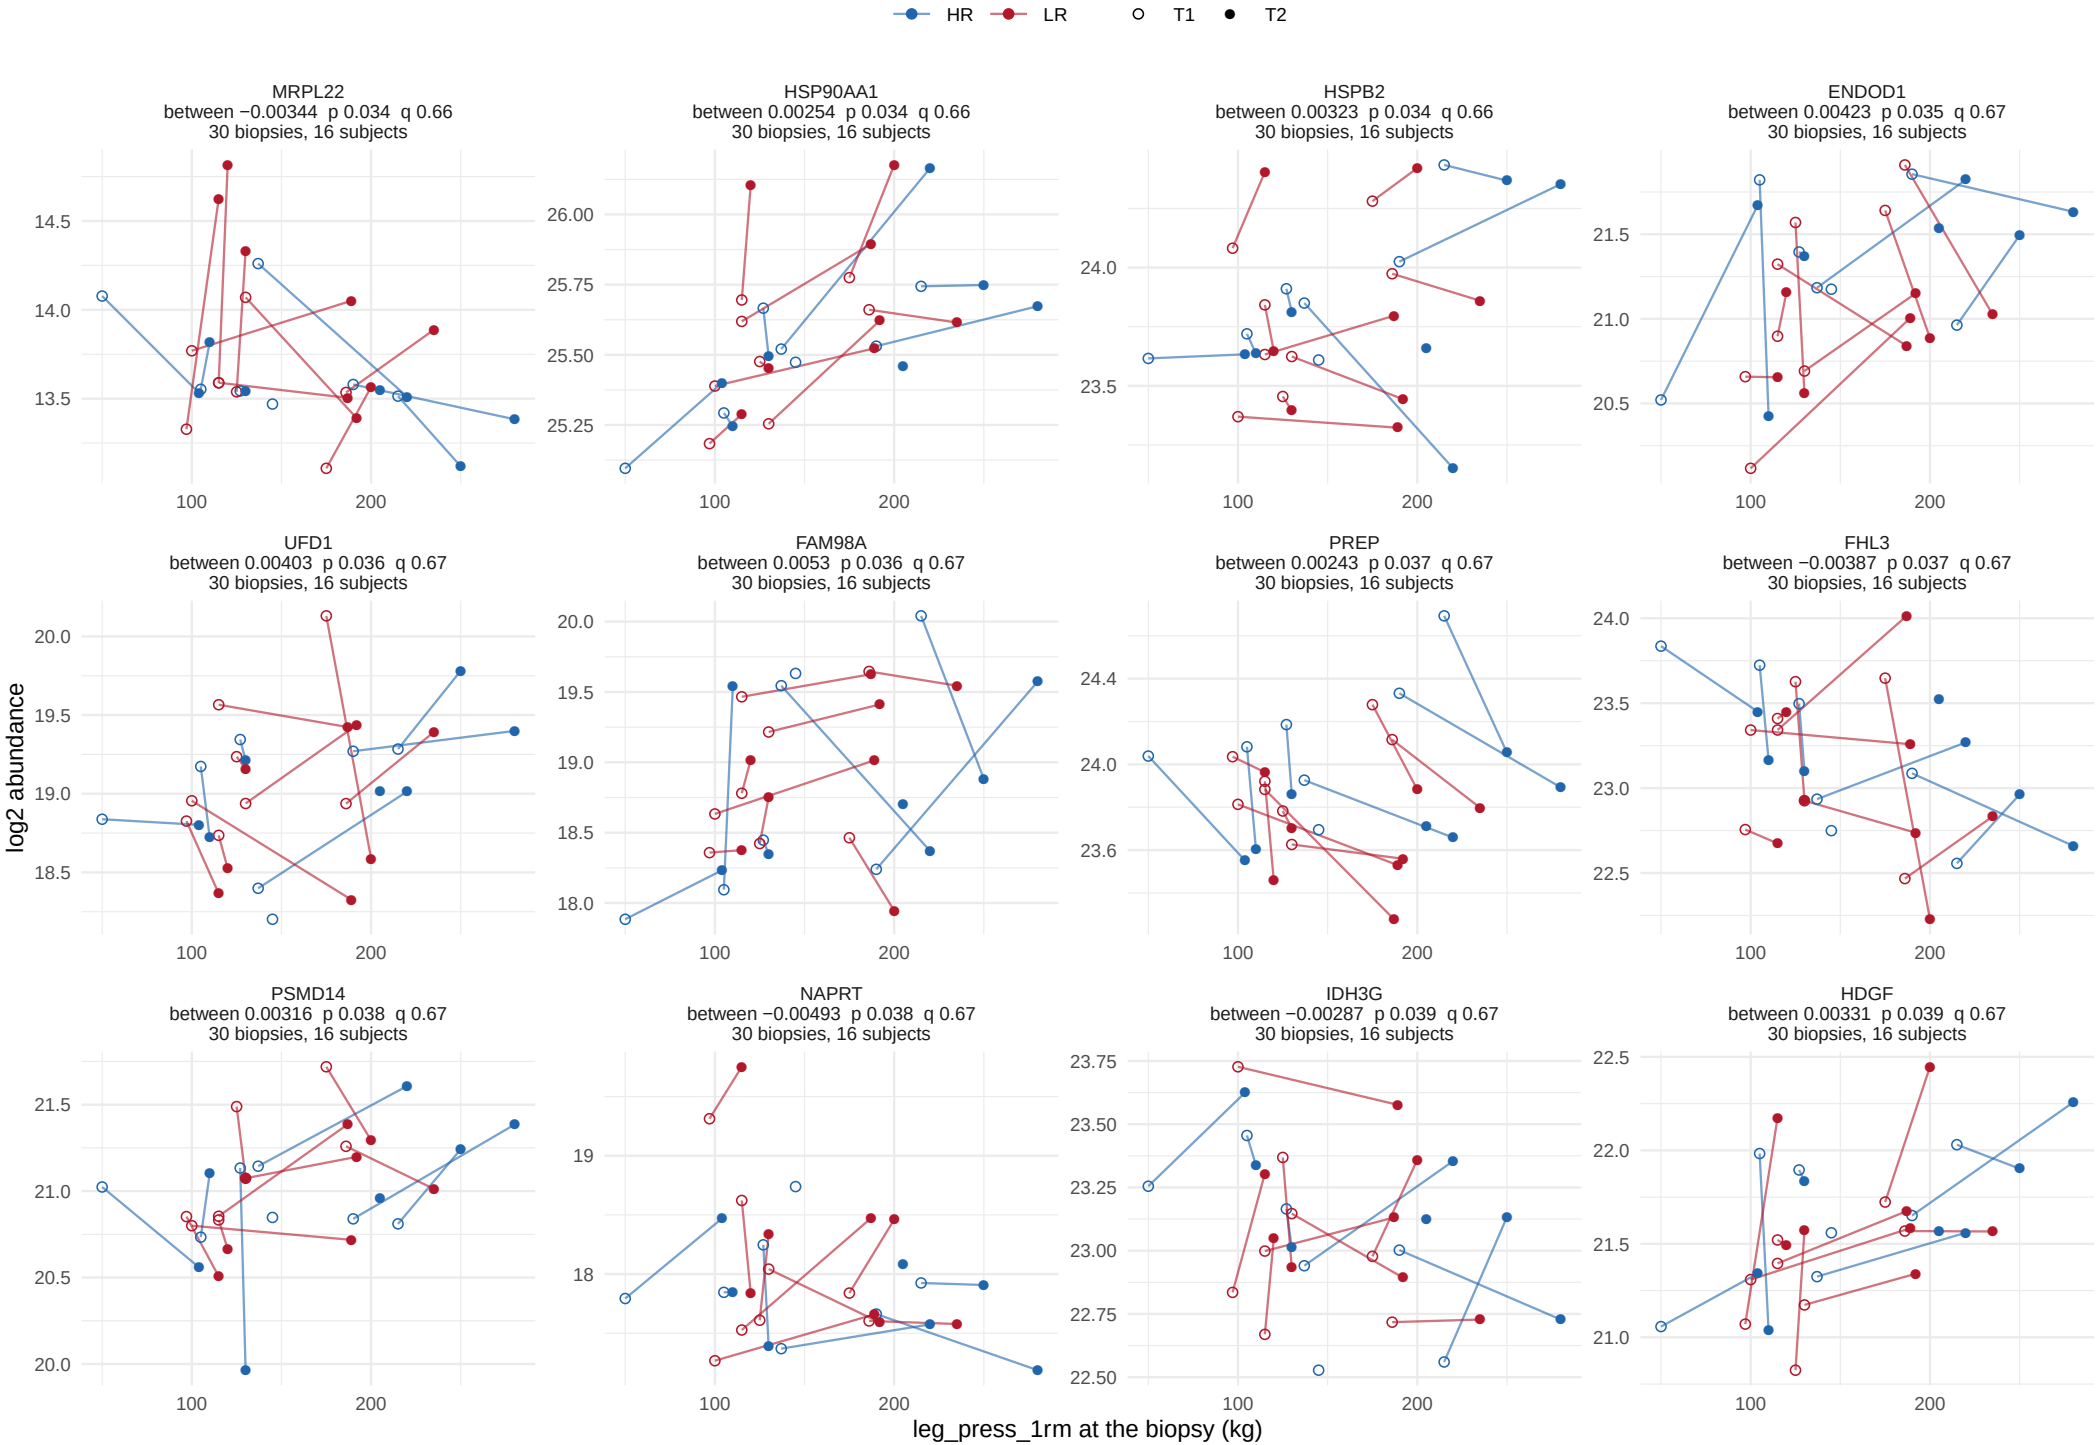

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_press_1rm, between−person term


131 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 10 of 11.

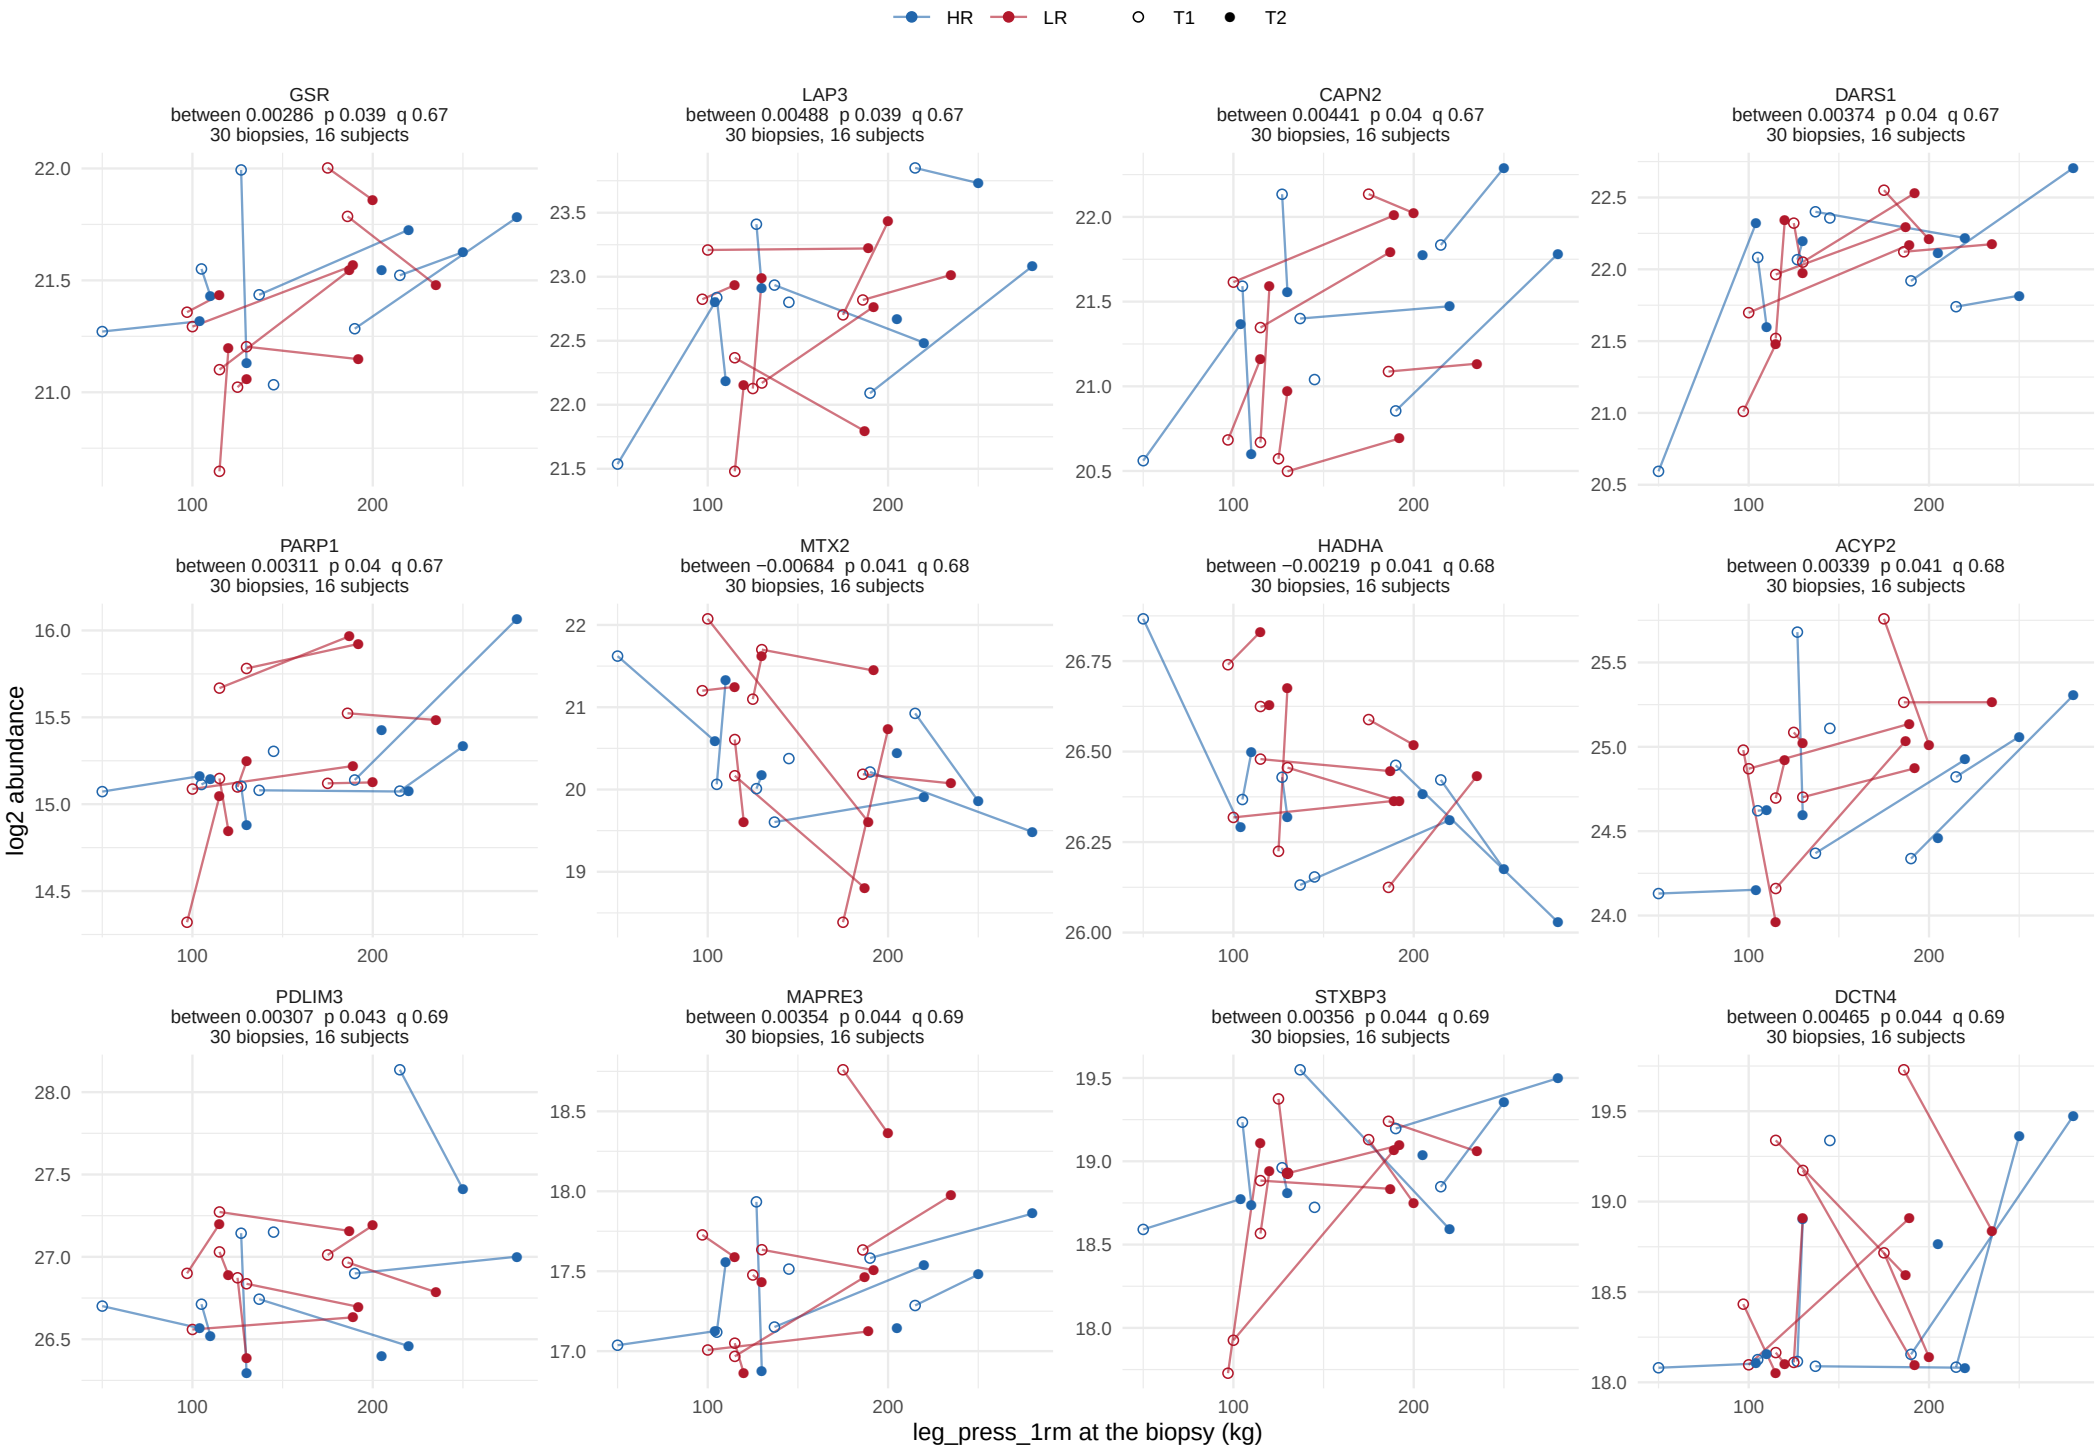

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_press_1rm, between−person term


131 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 11 of 11.

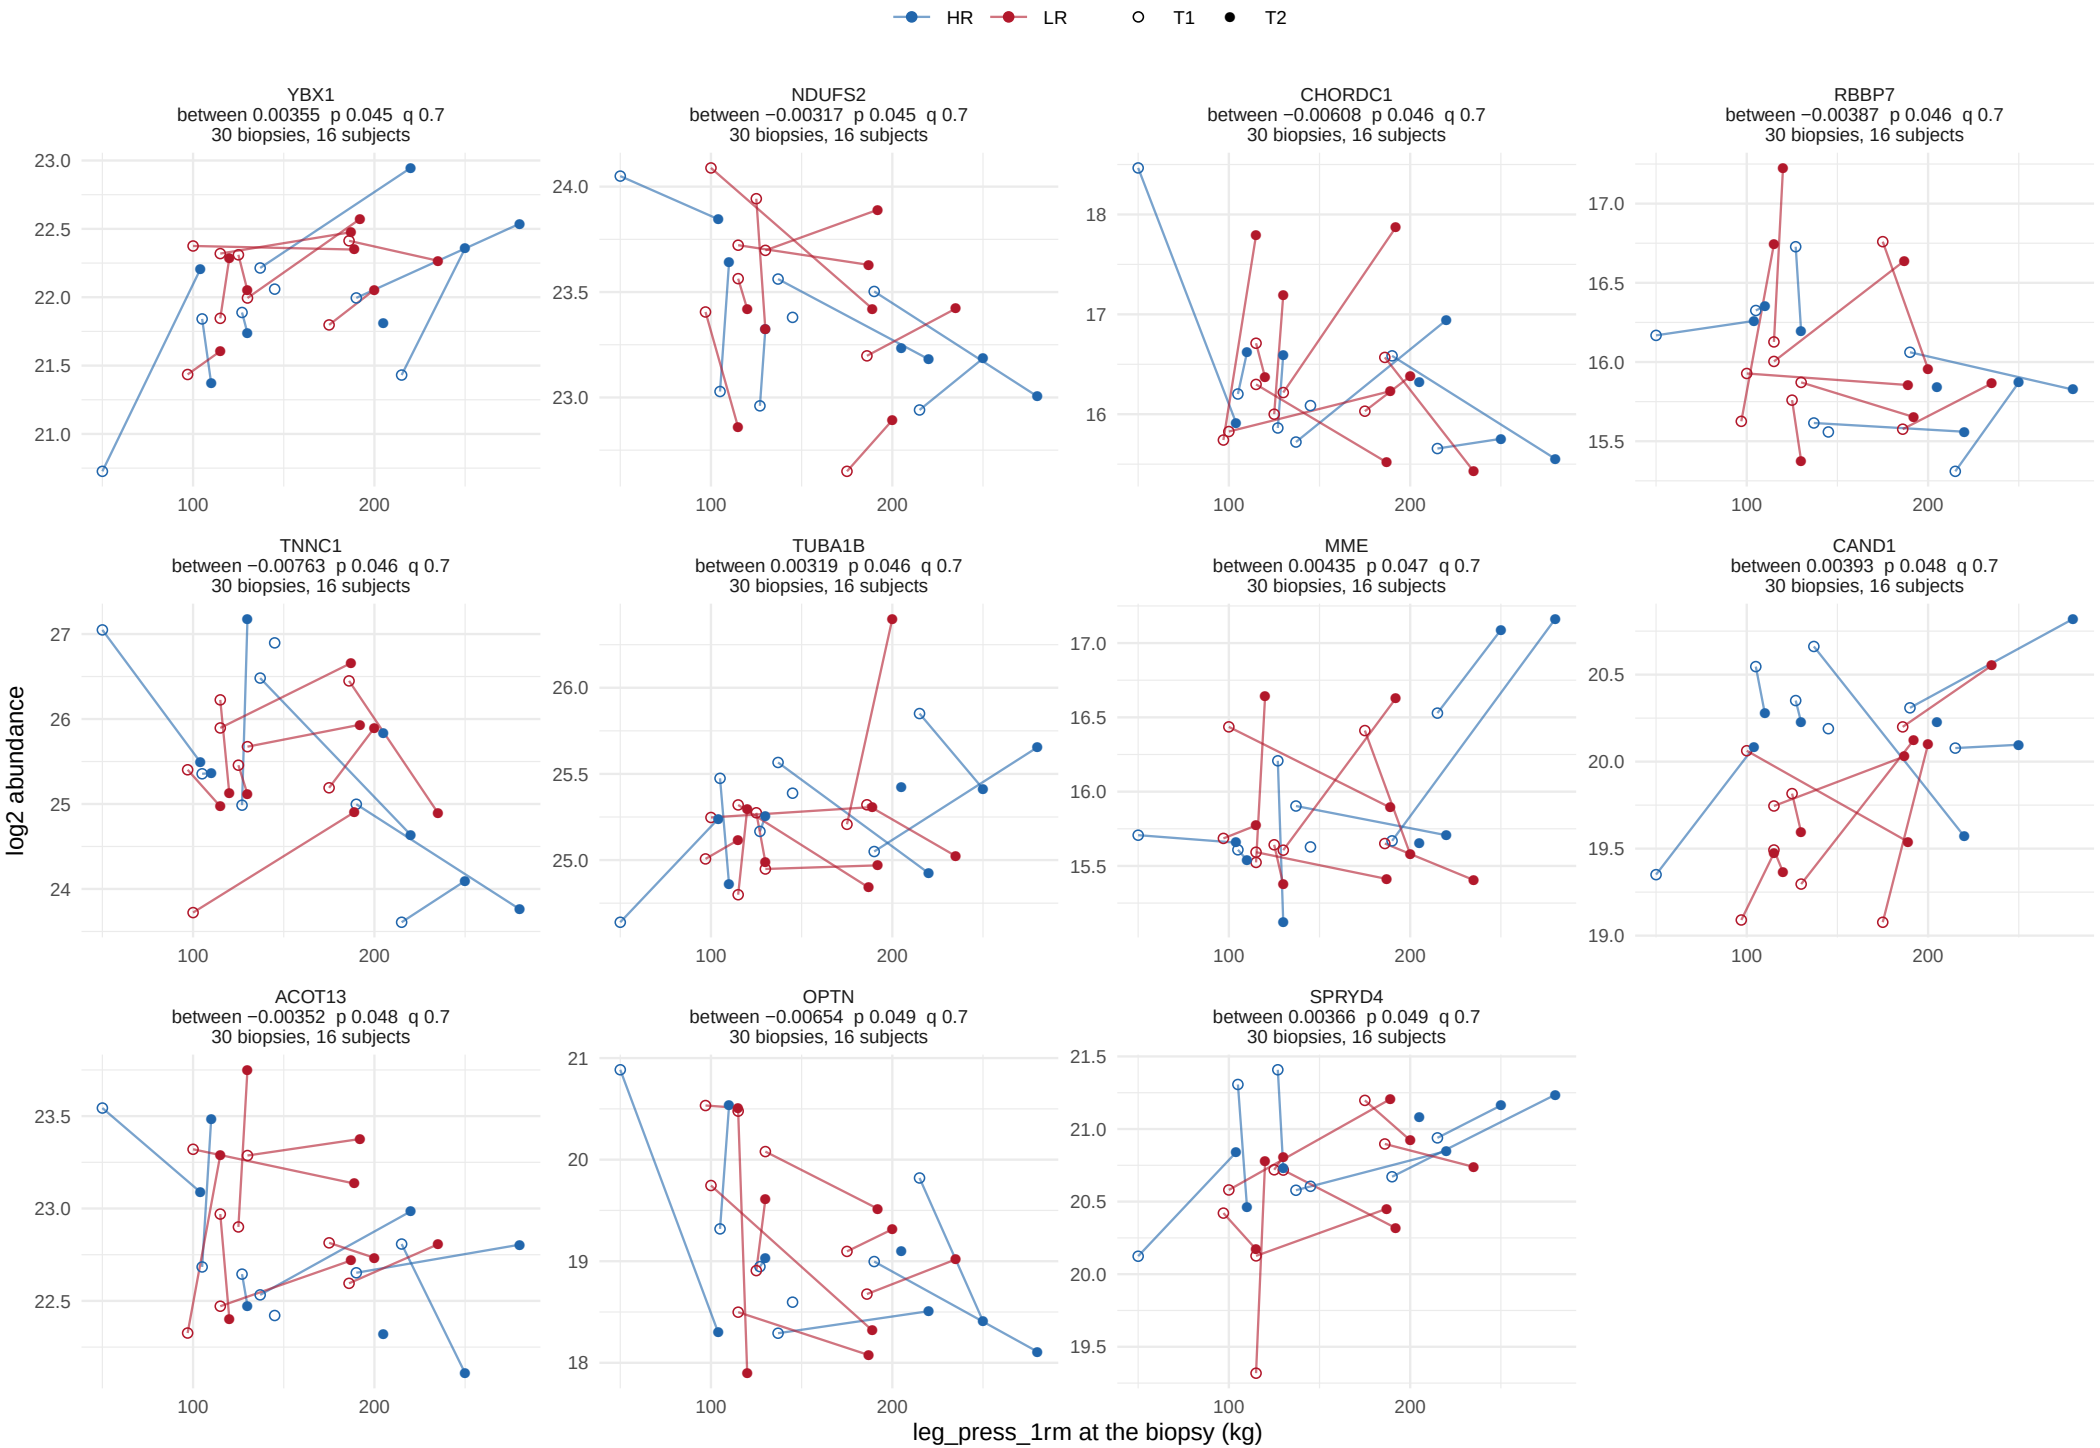

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_ext_1rm, within−person term


135 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 1 of 12.

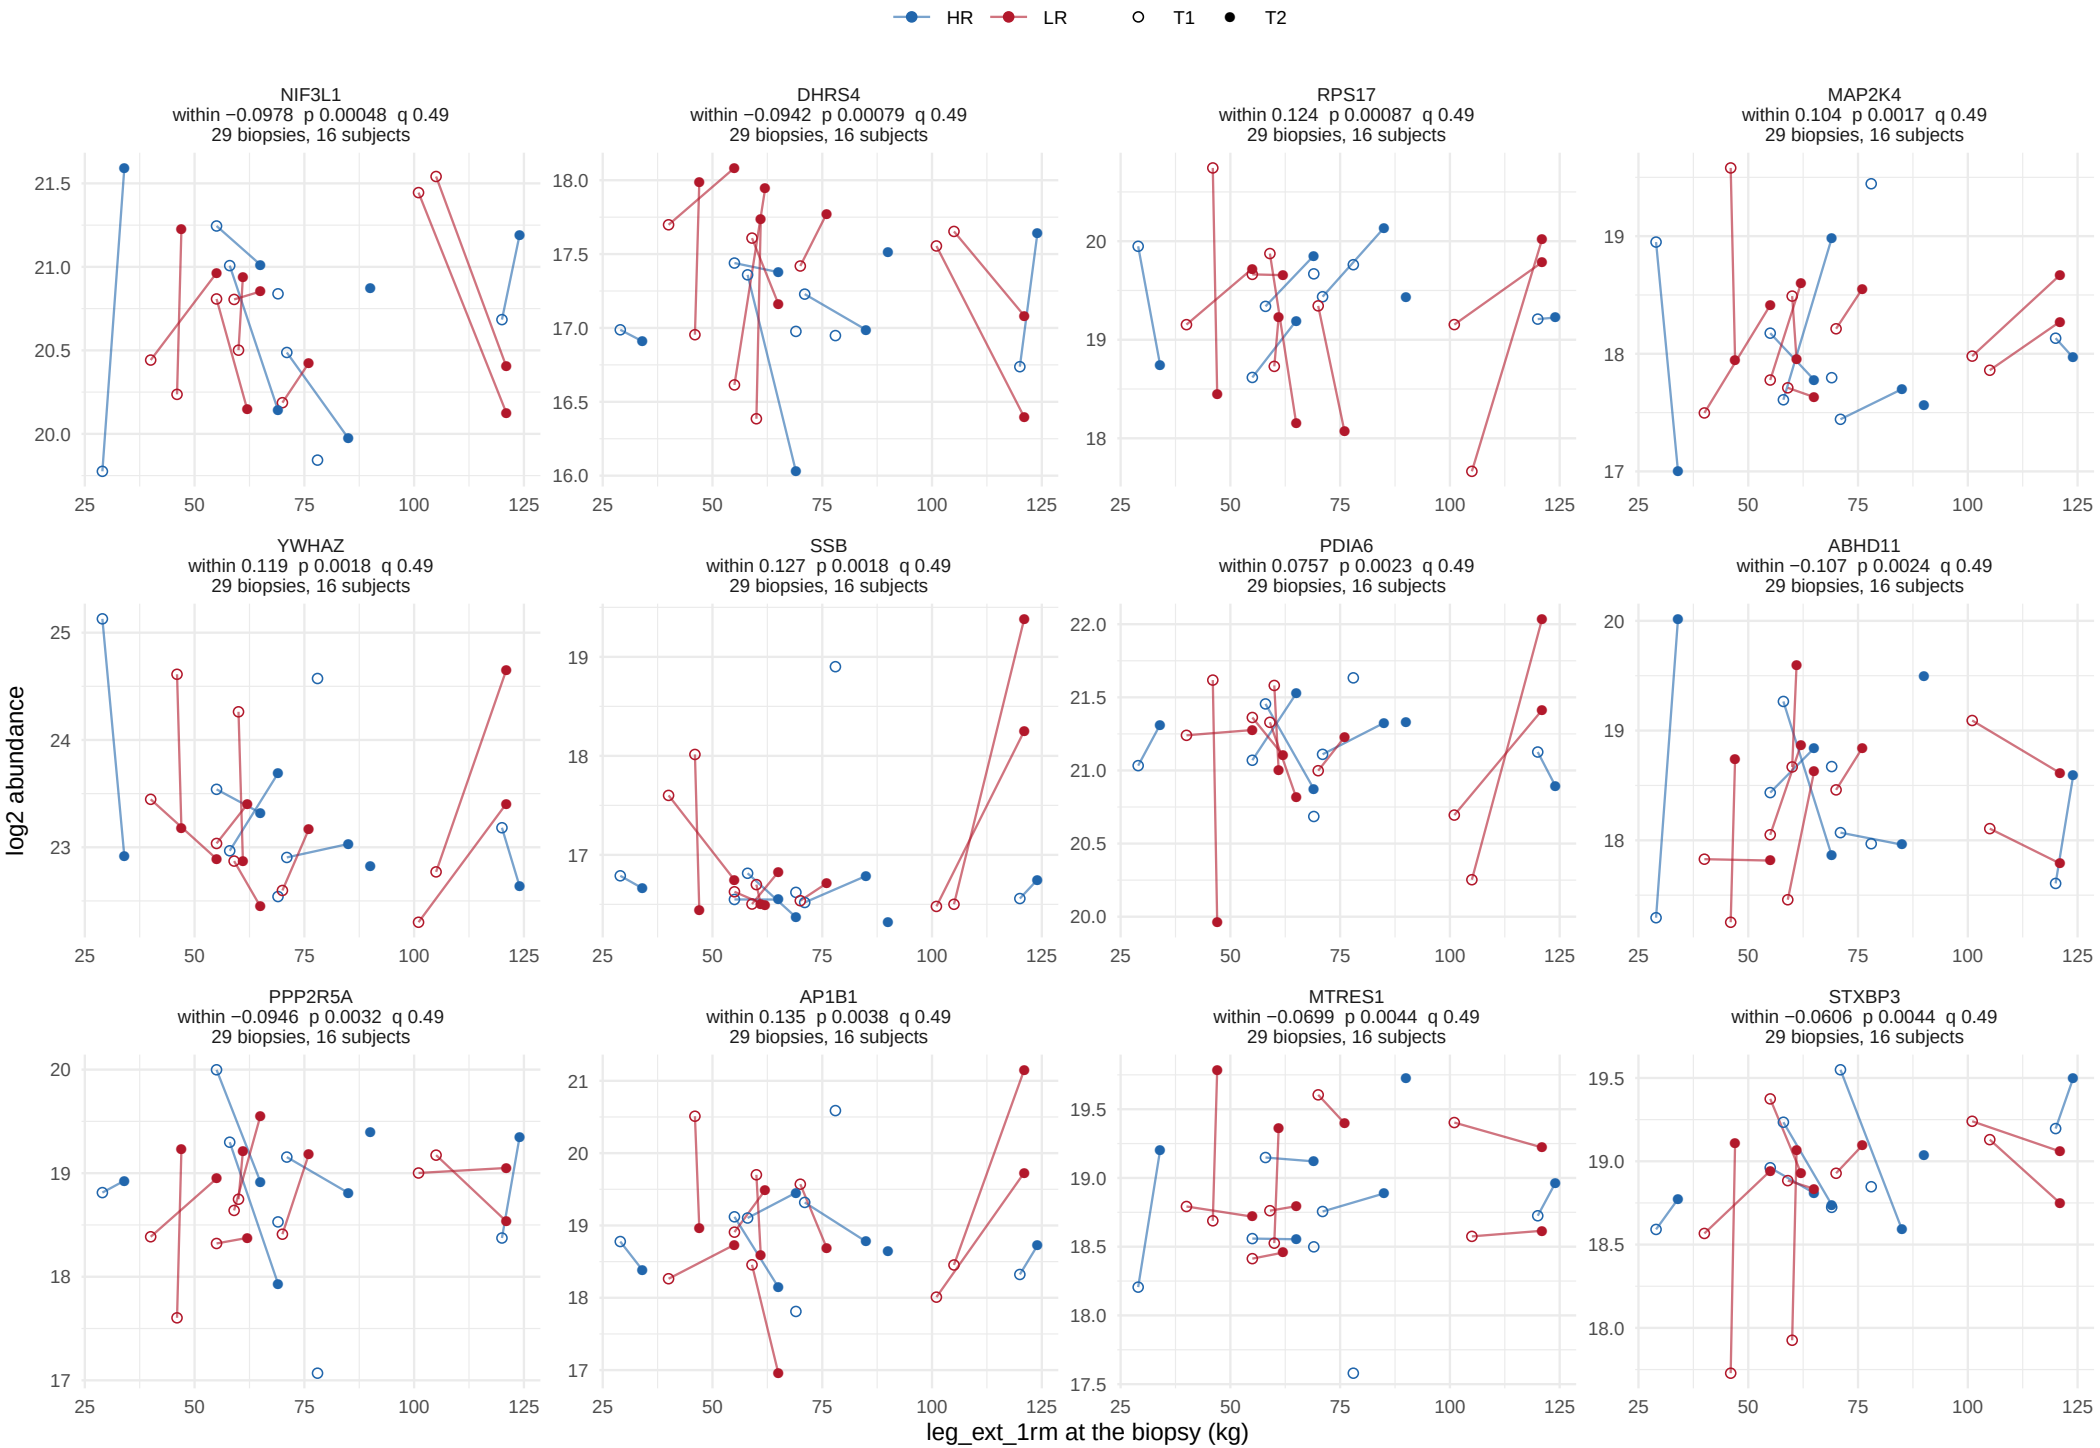

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_ext_1rm, within−person term


135 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 2 of 12.

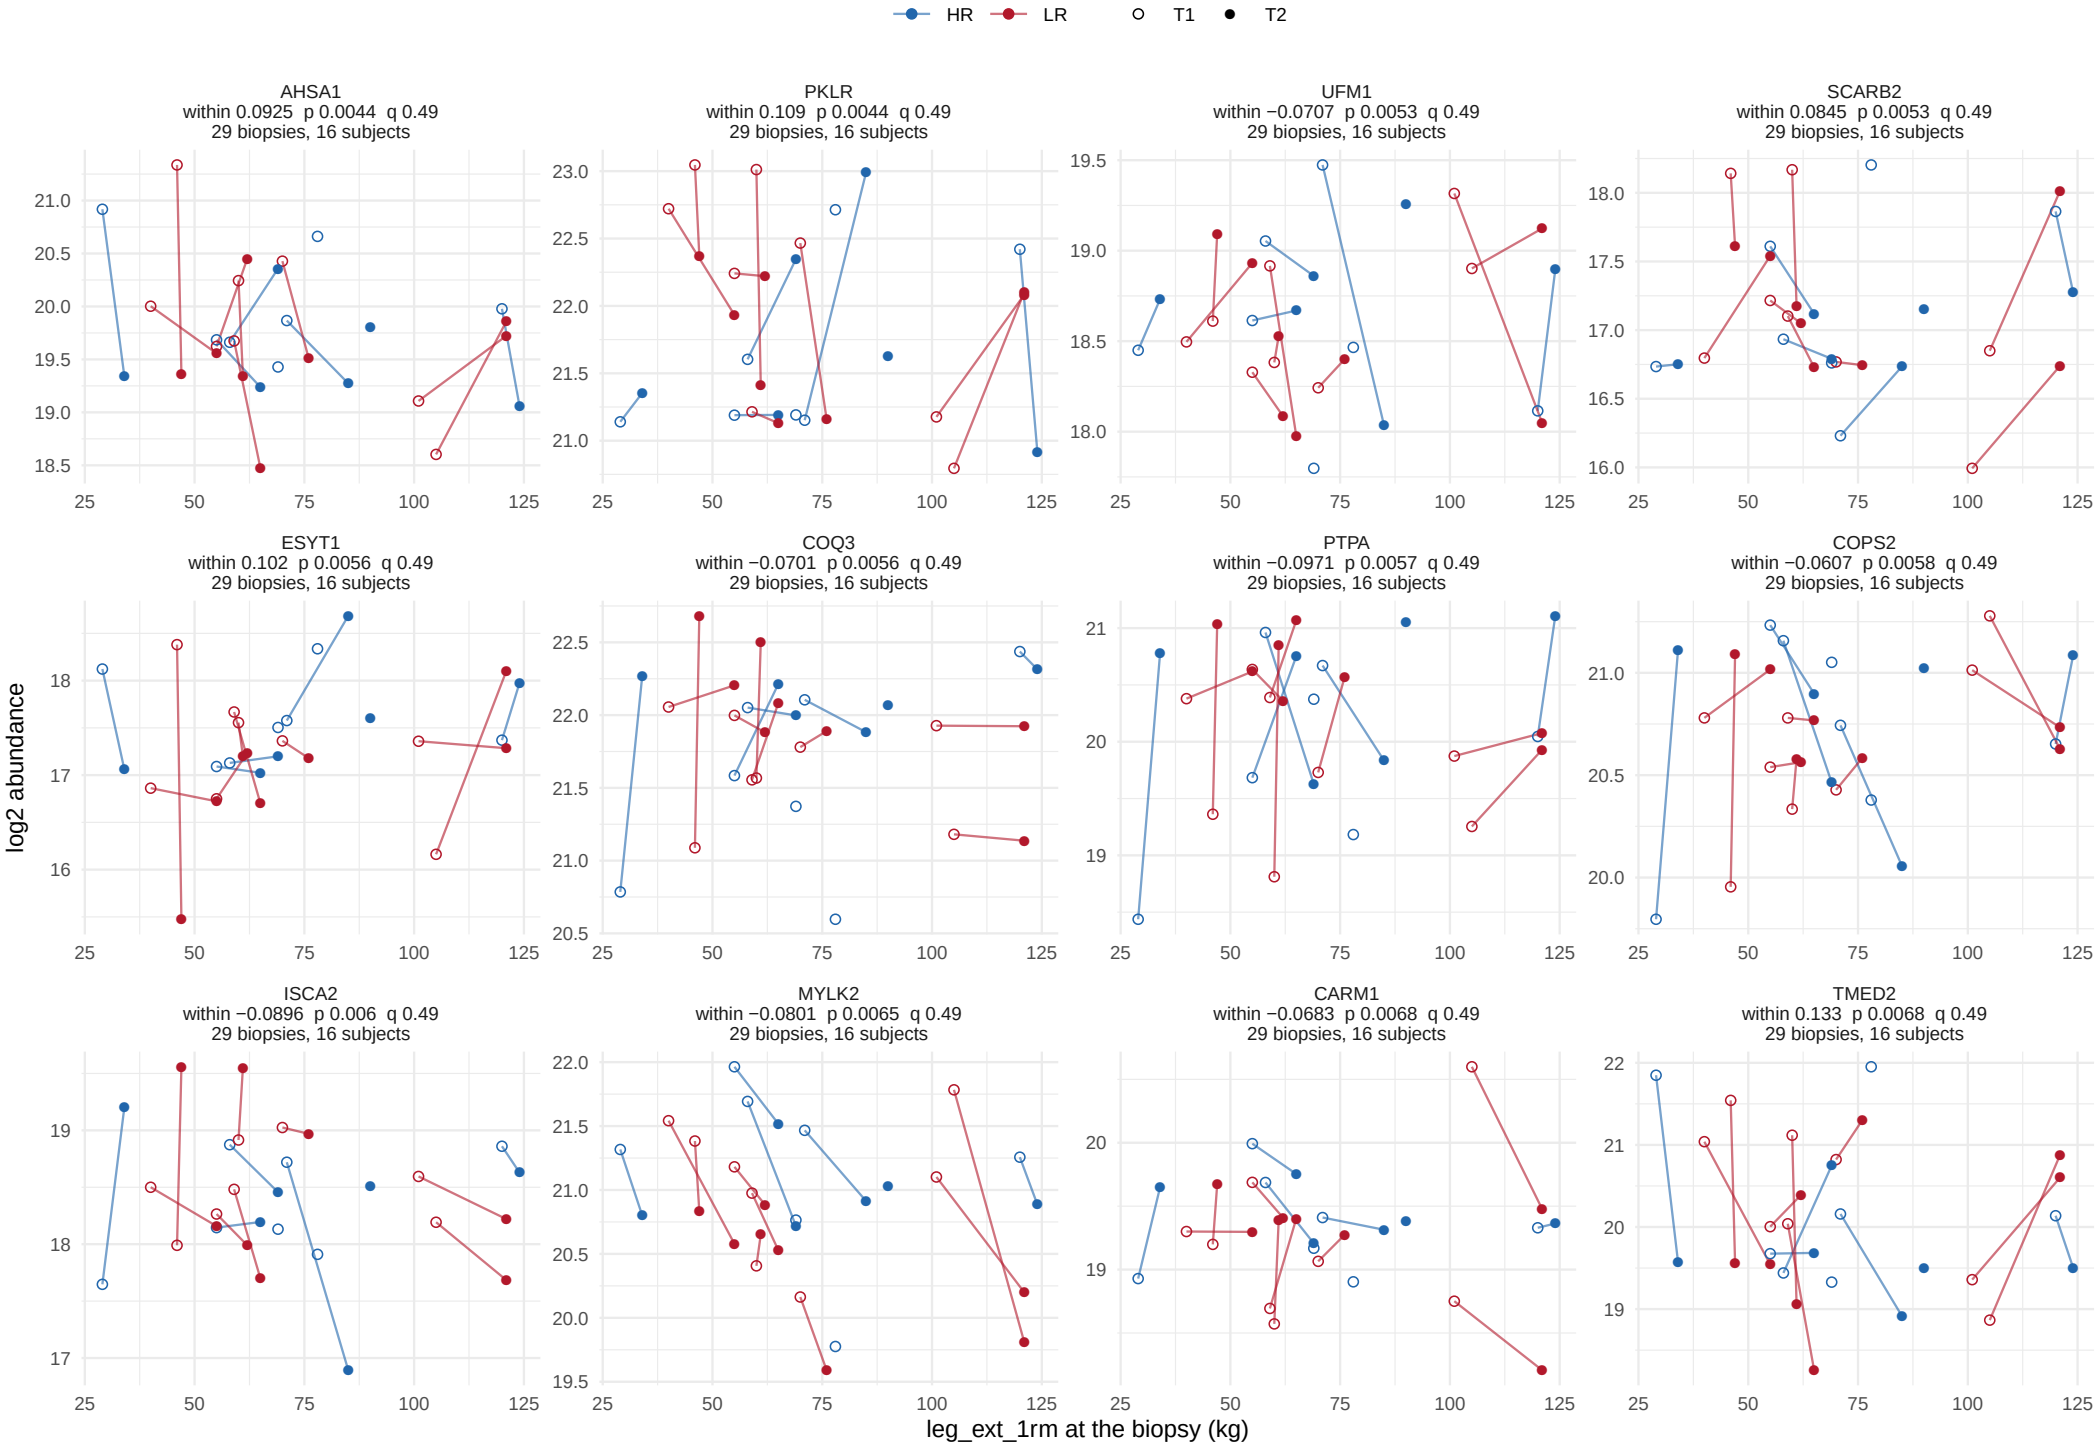

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_ext_1rm, within−person term


135 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 3 of 12.

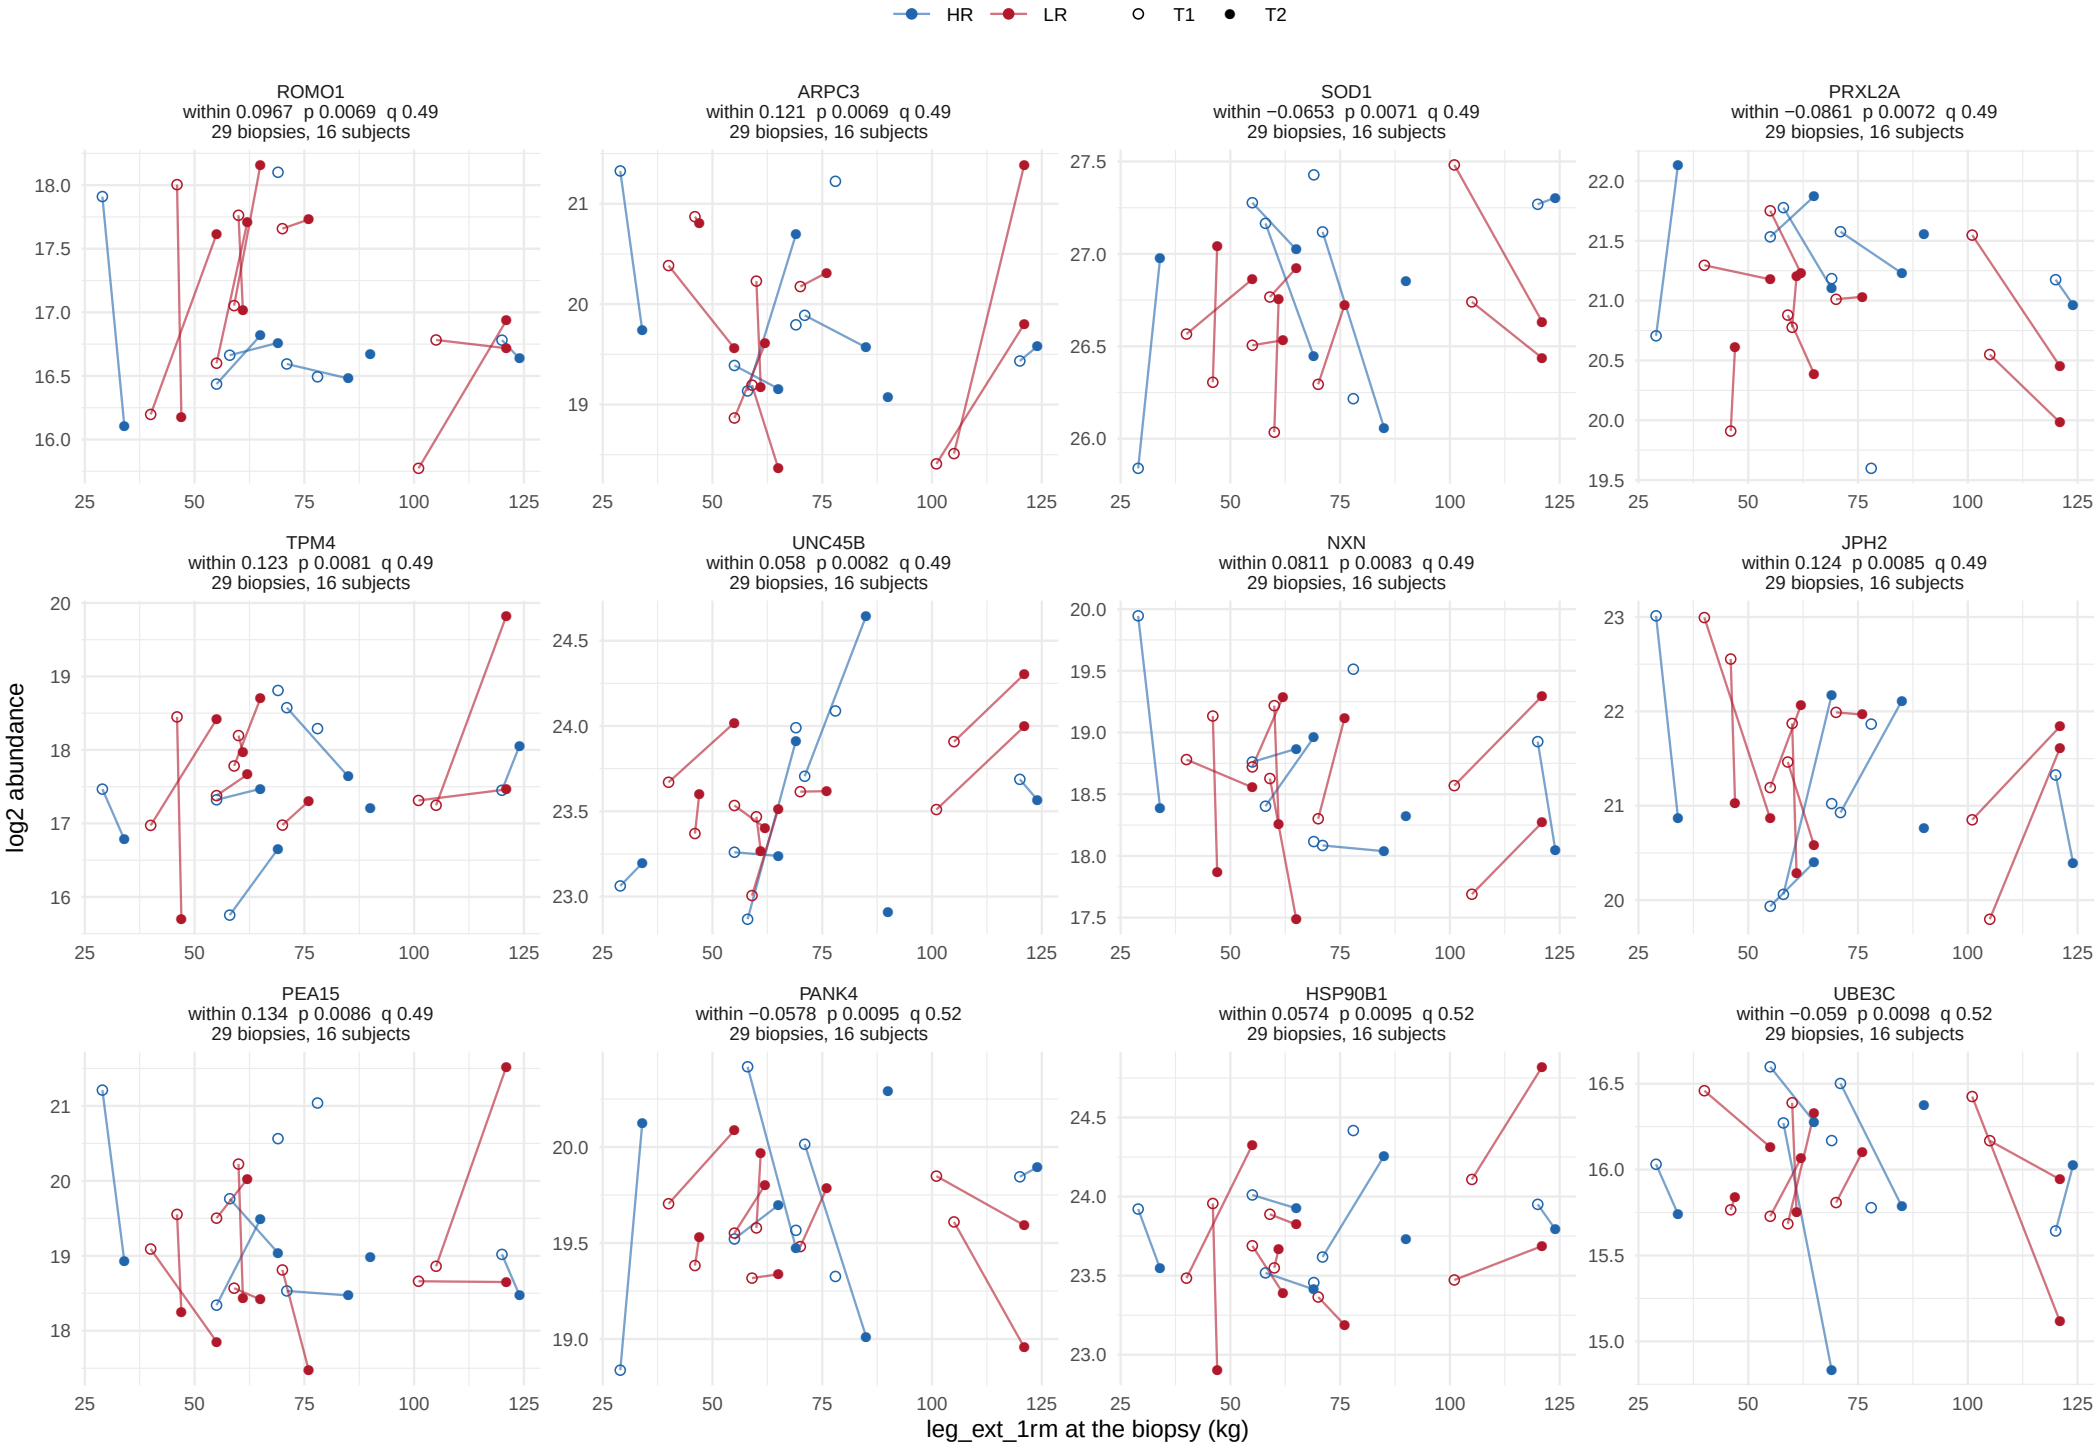

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_ext_1rm, within−person term


135 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 4 of 12.

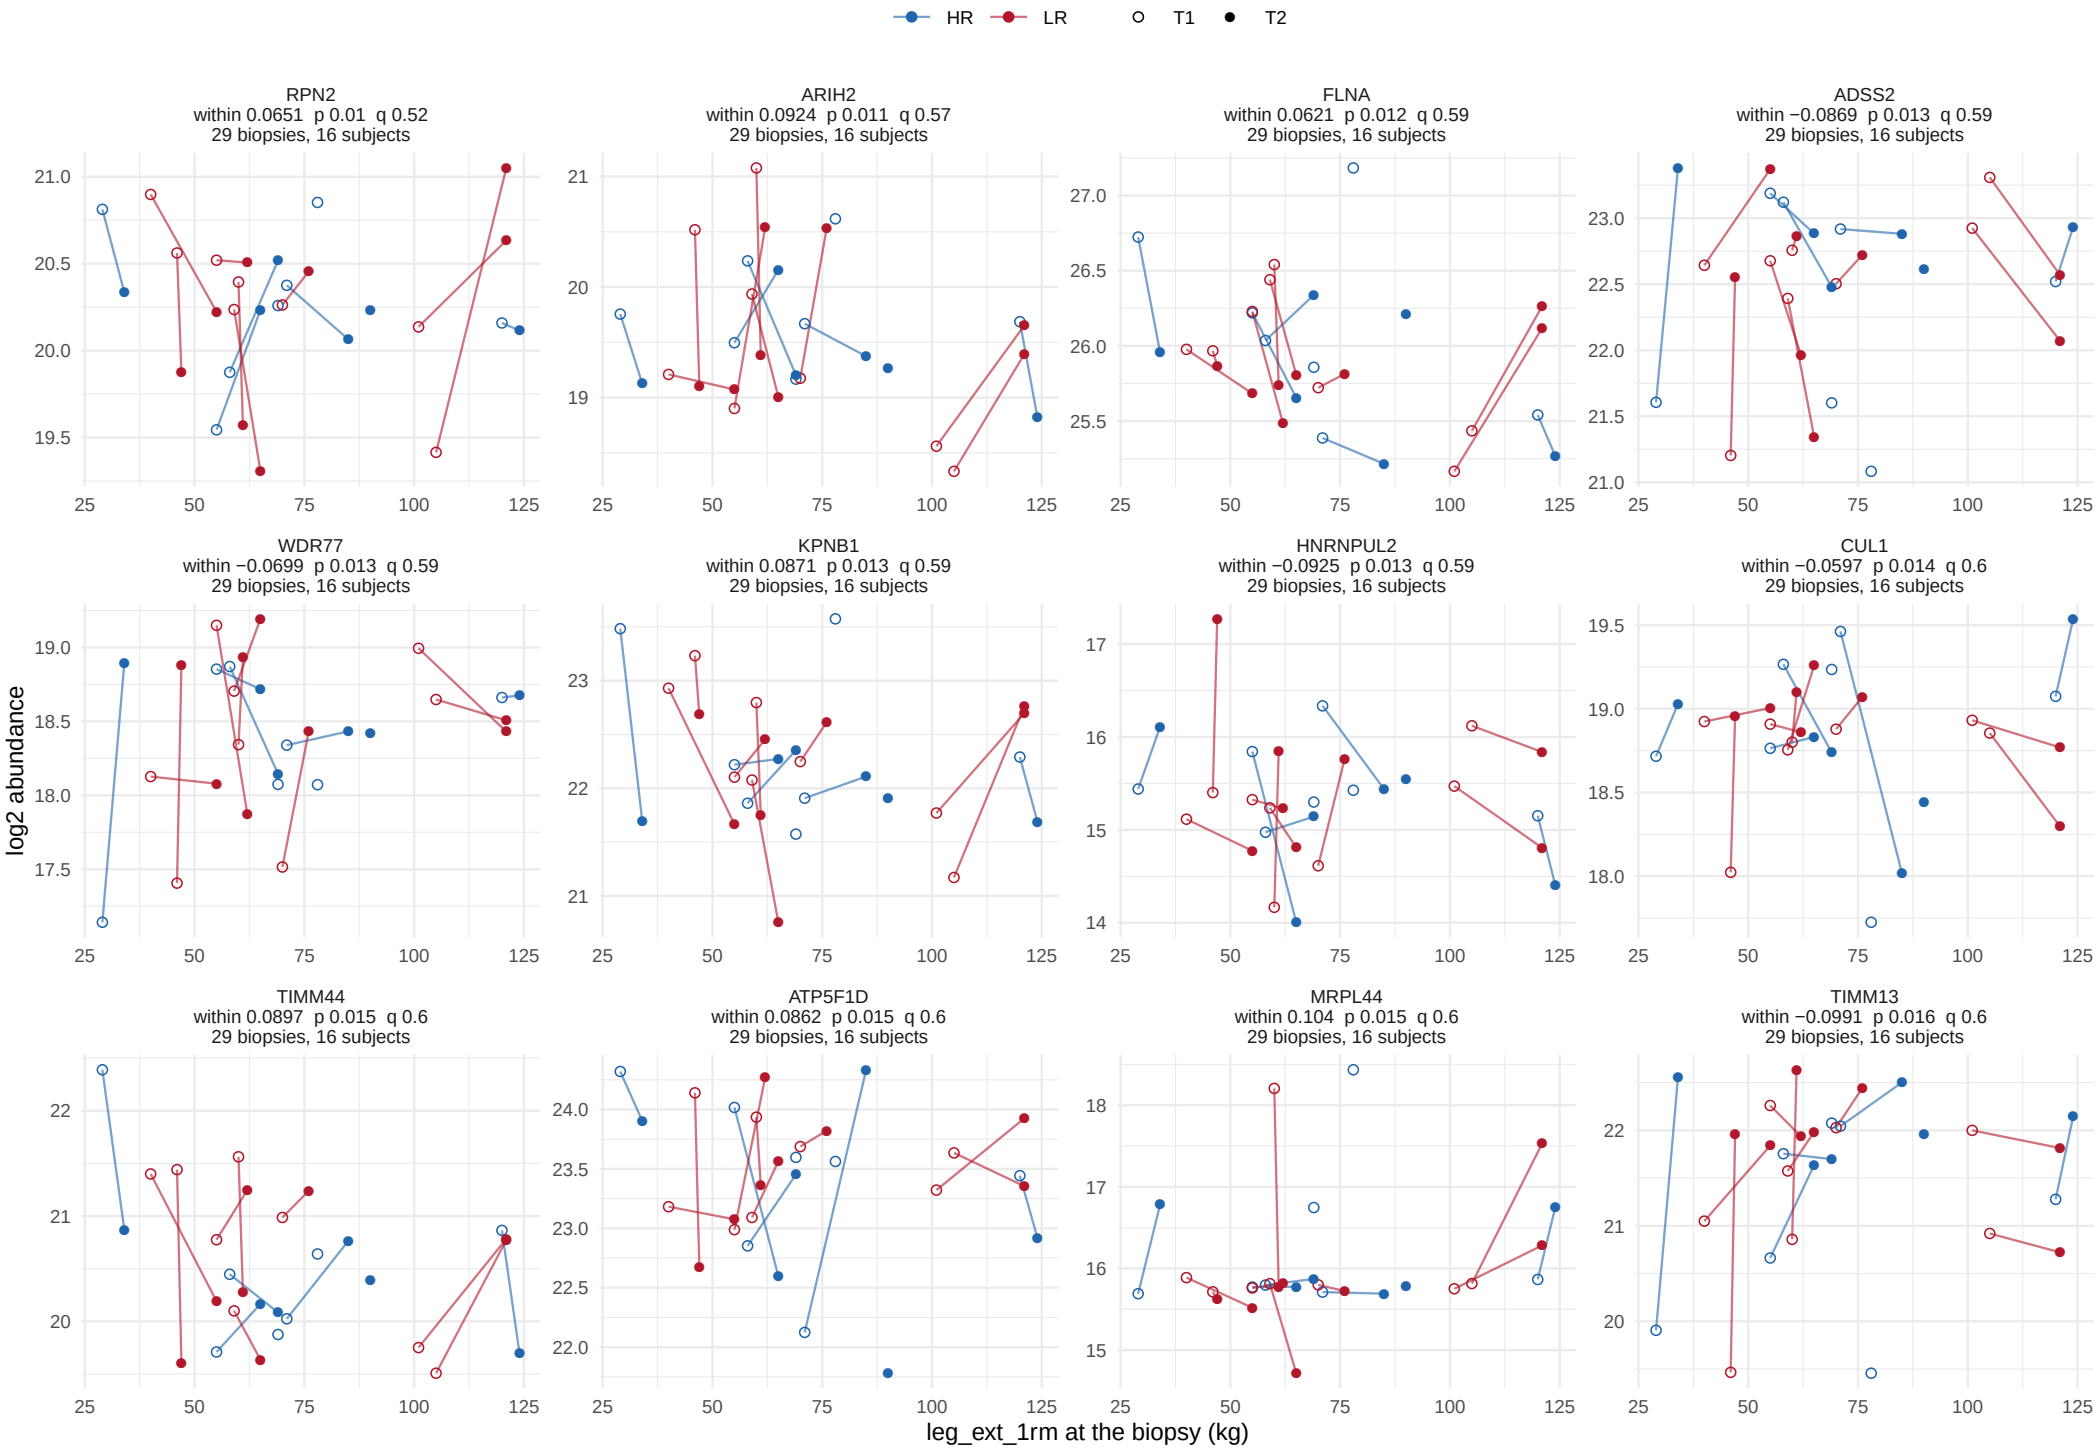

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_ext_1rm, within−person term


135 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 5 of 12.

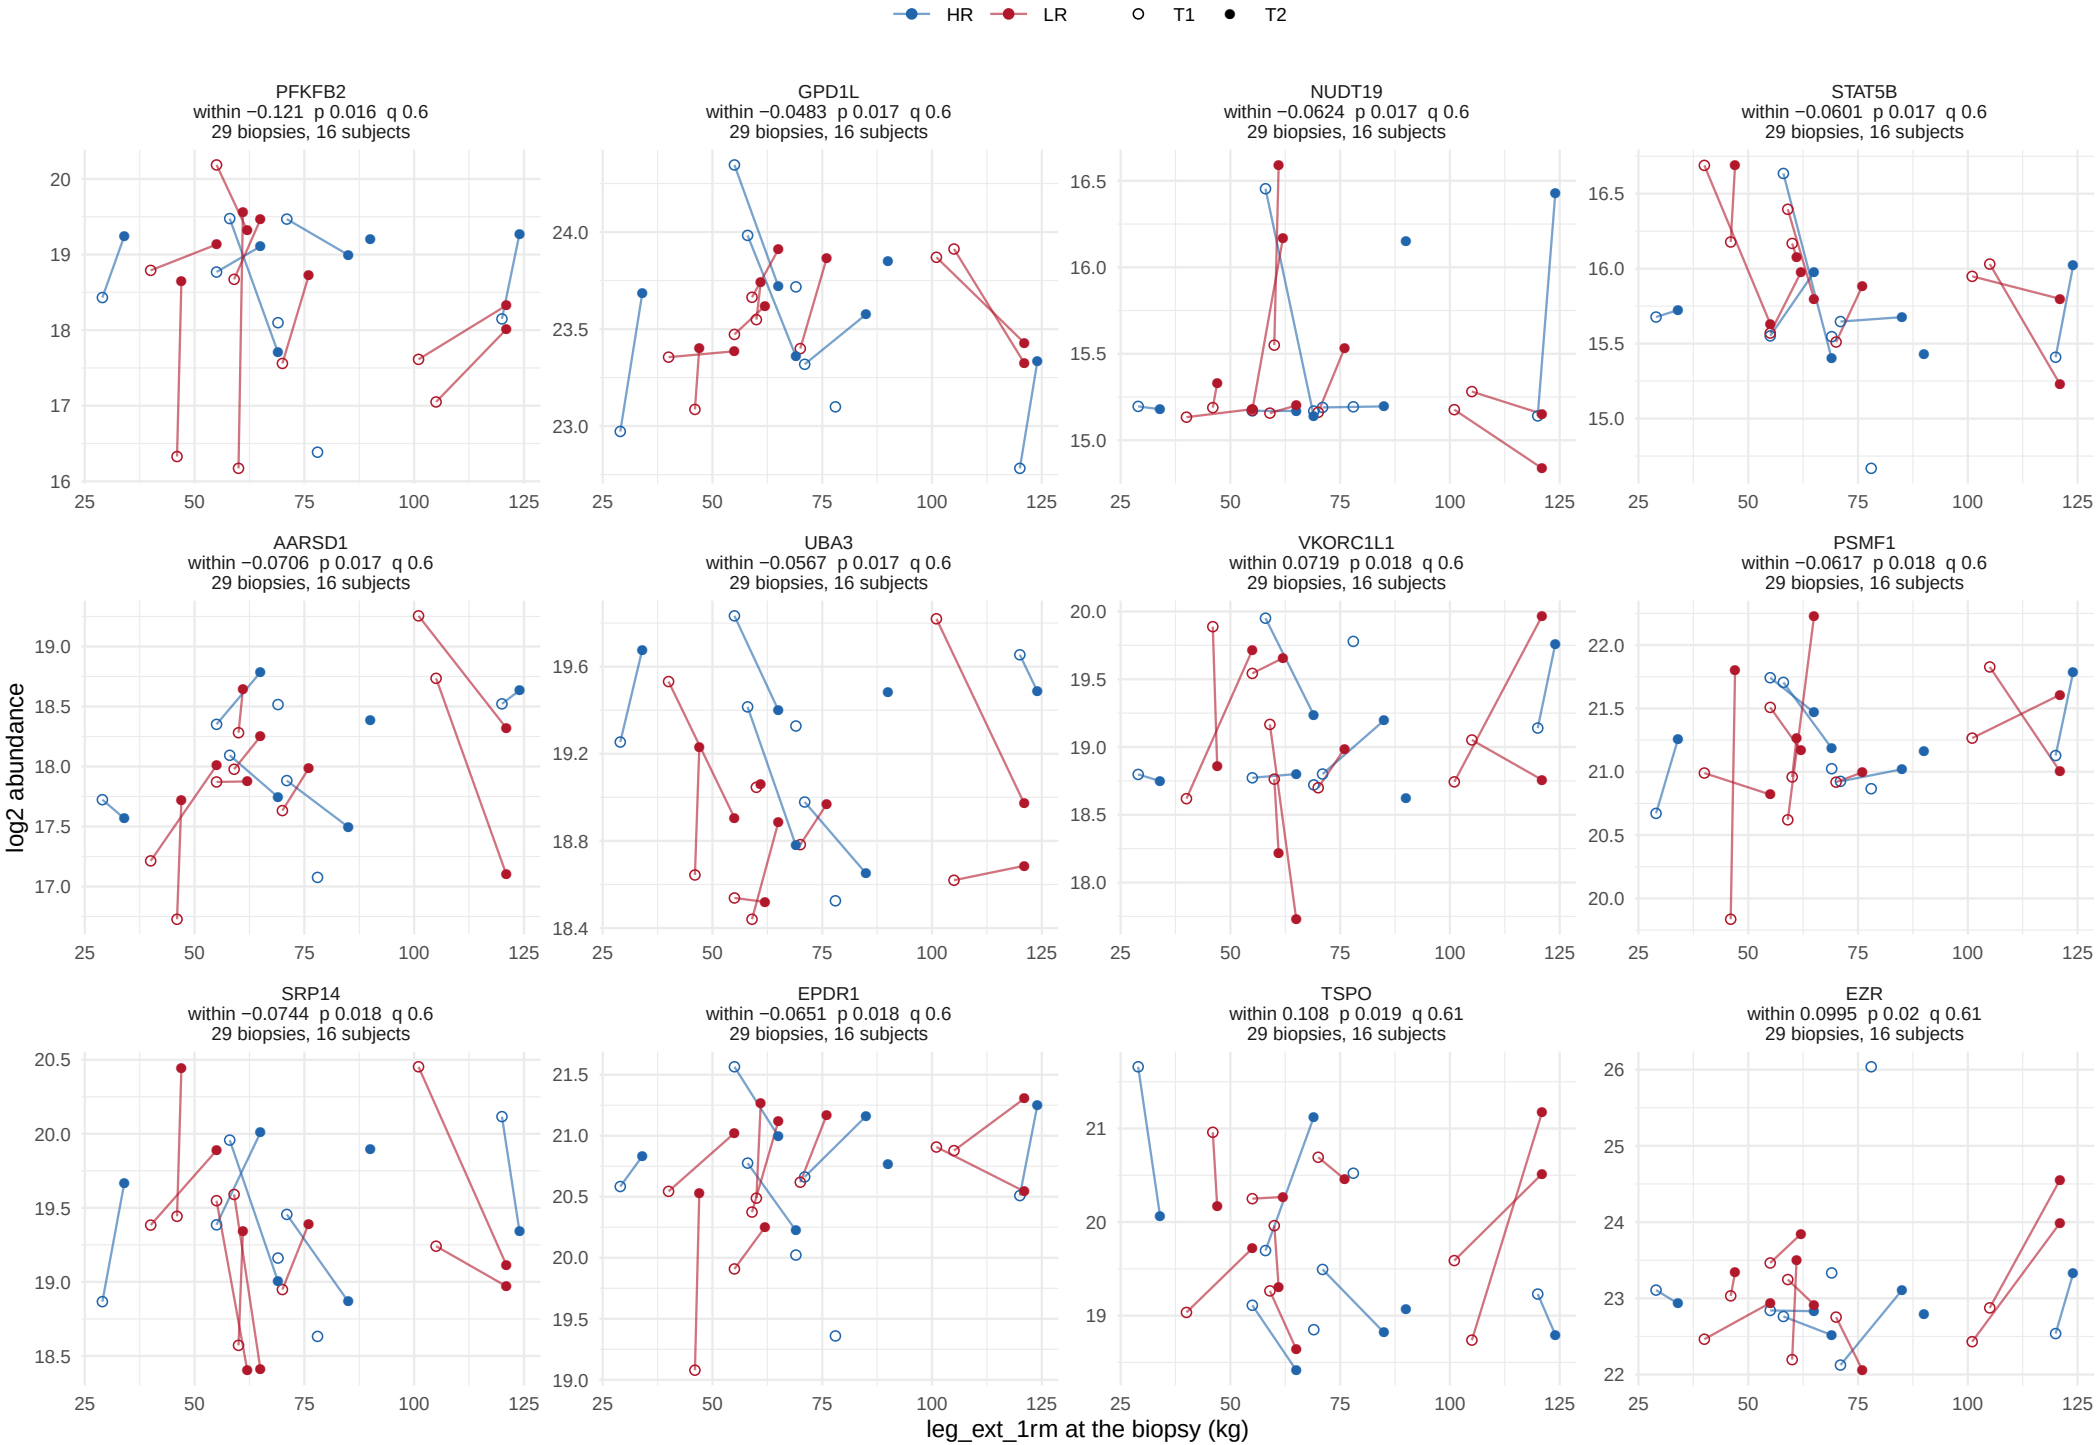

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_ext_1rm, within−person term


135 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 6 of 12.

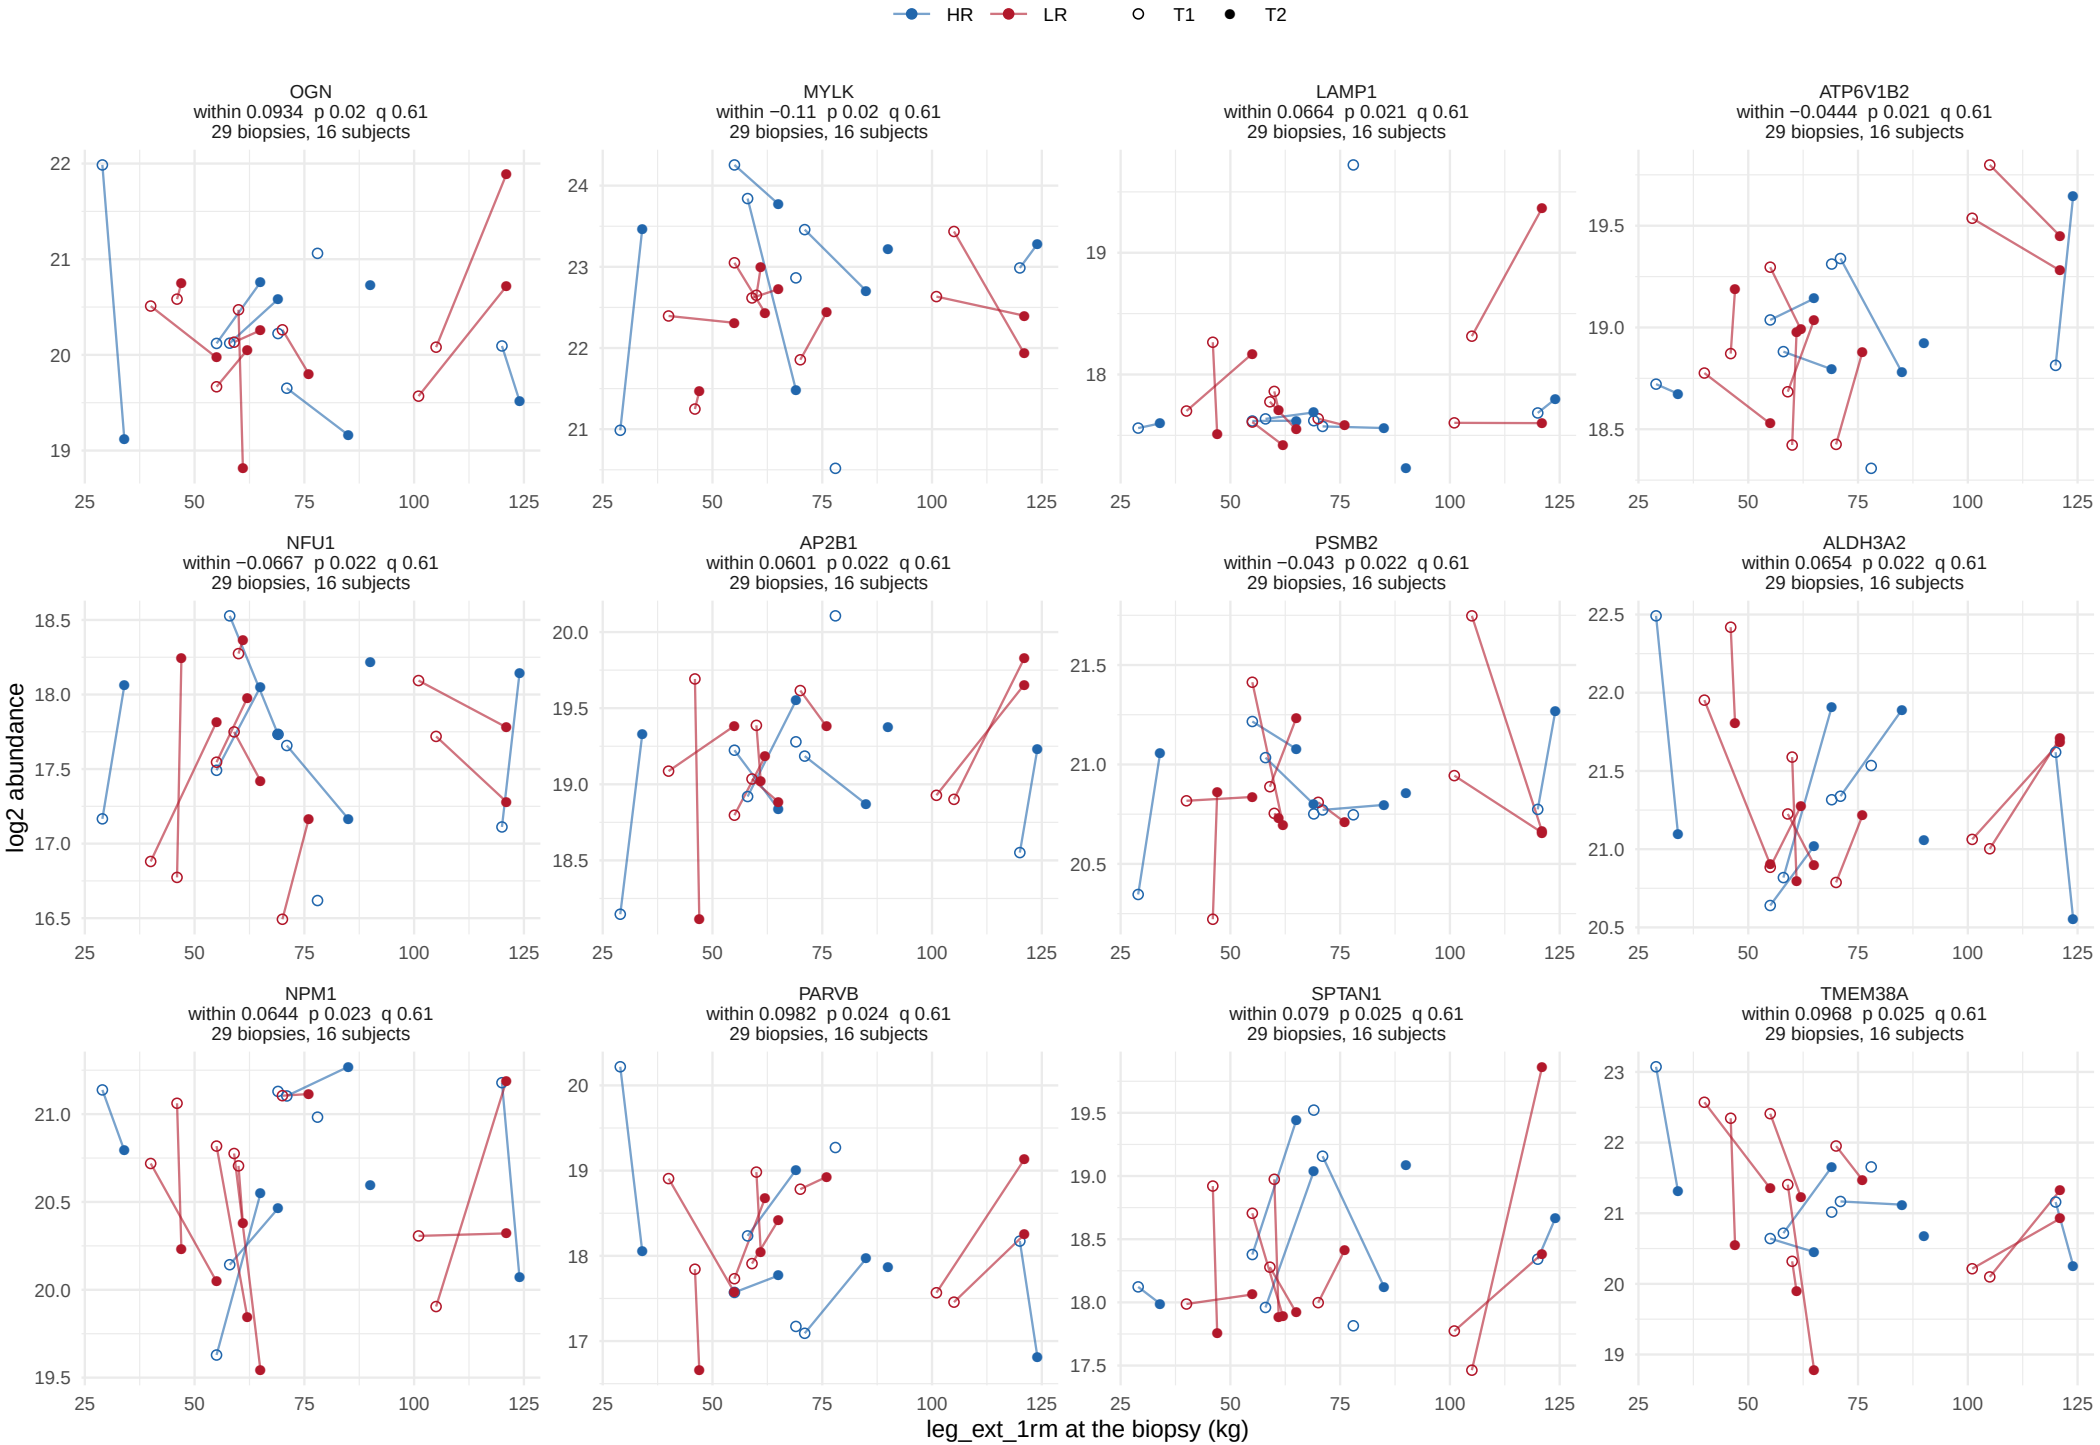

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_ext_1rm, within−person term


135 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 7 of 12.

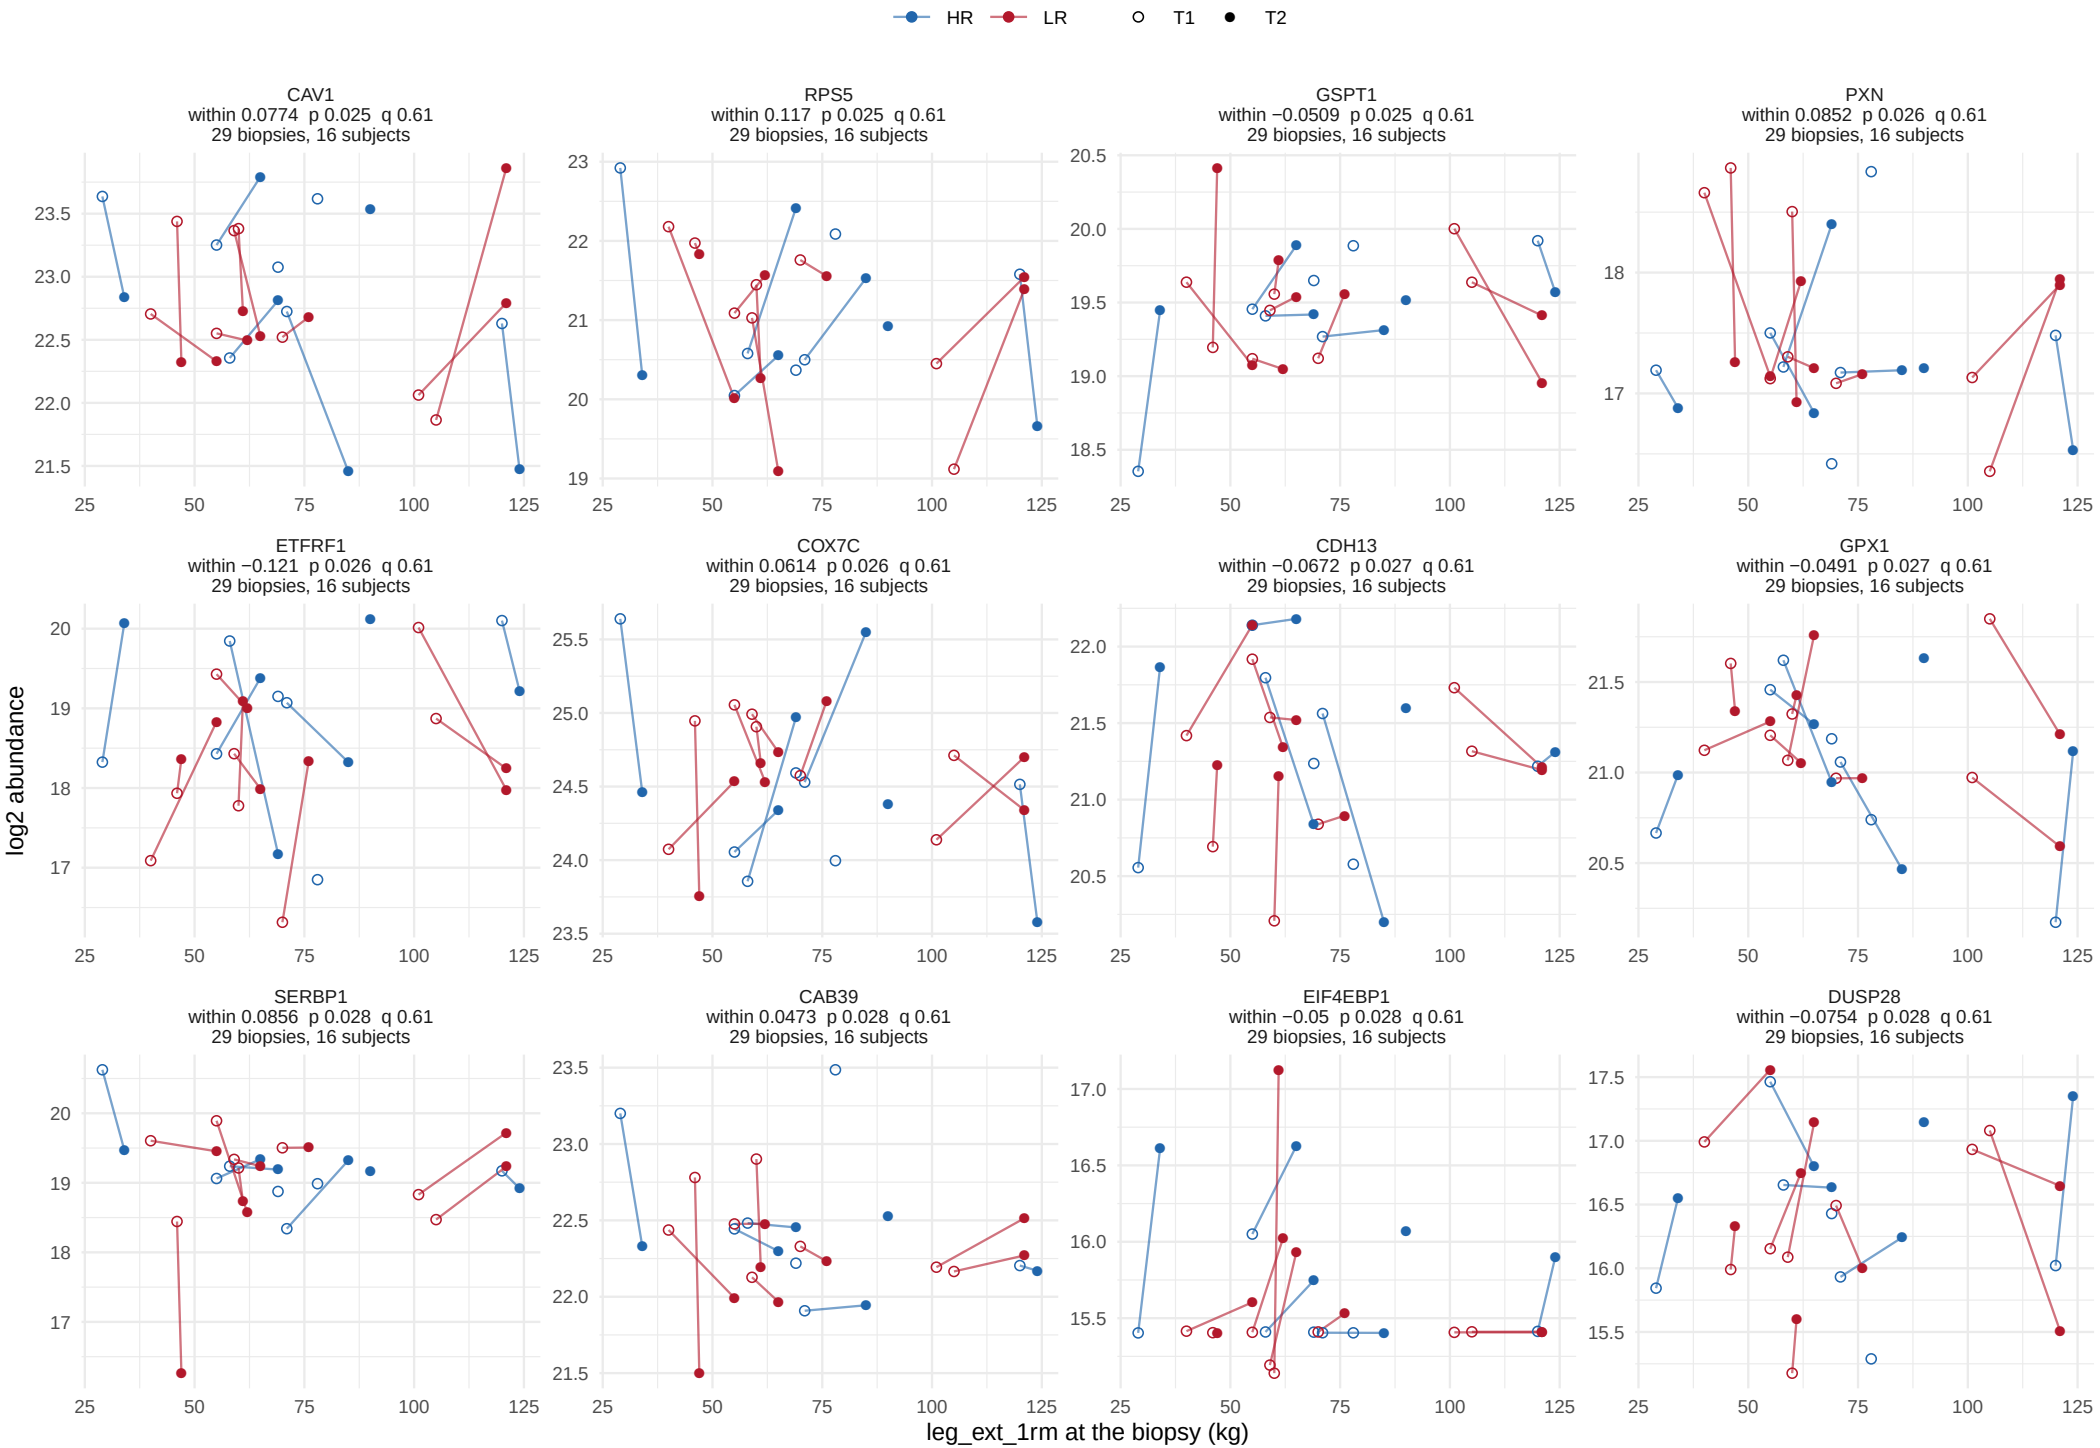

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_ext_1rm, within−person term


135 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 8 of 12.

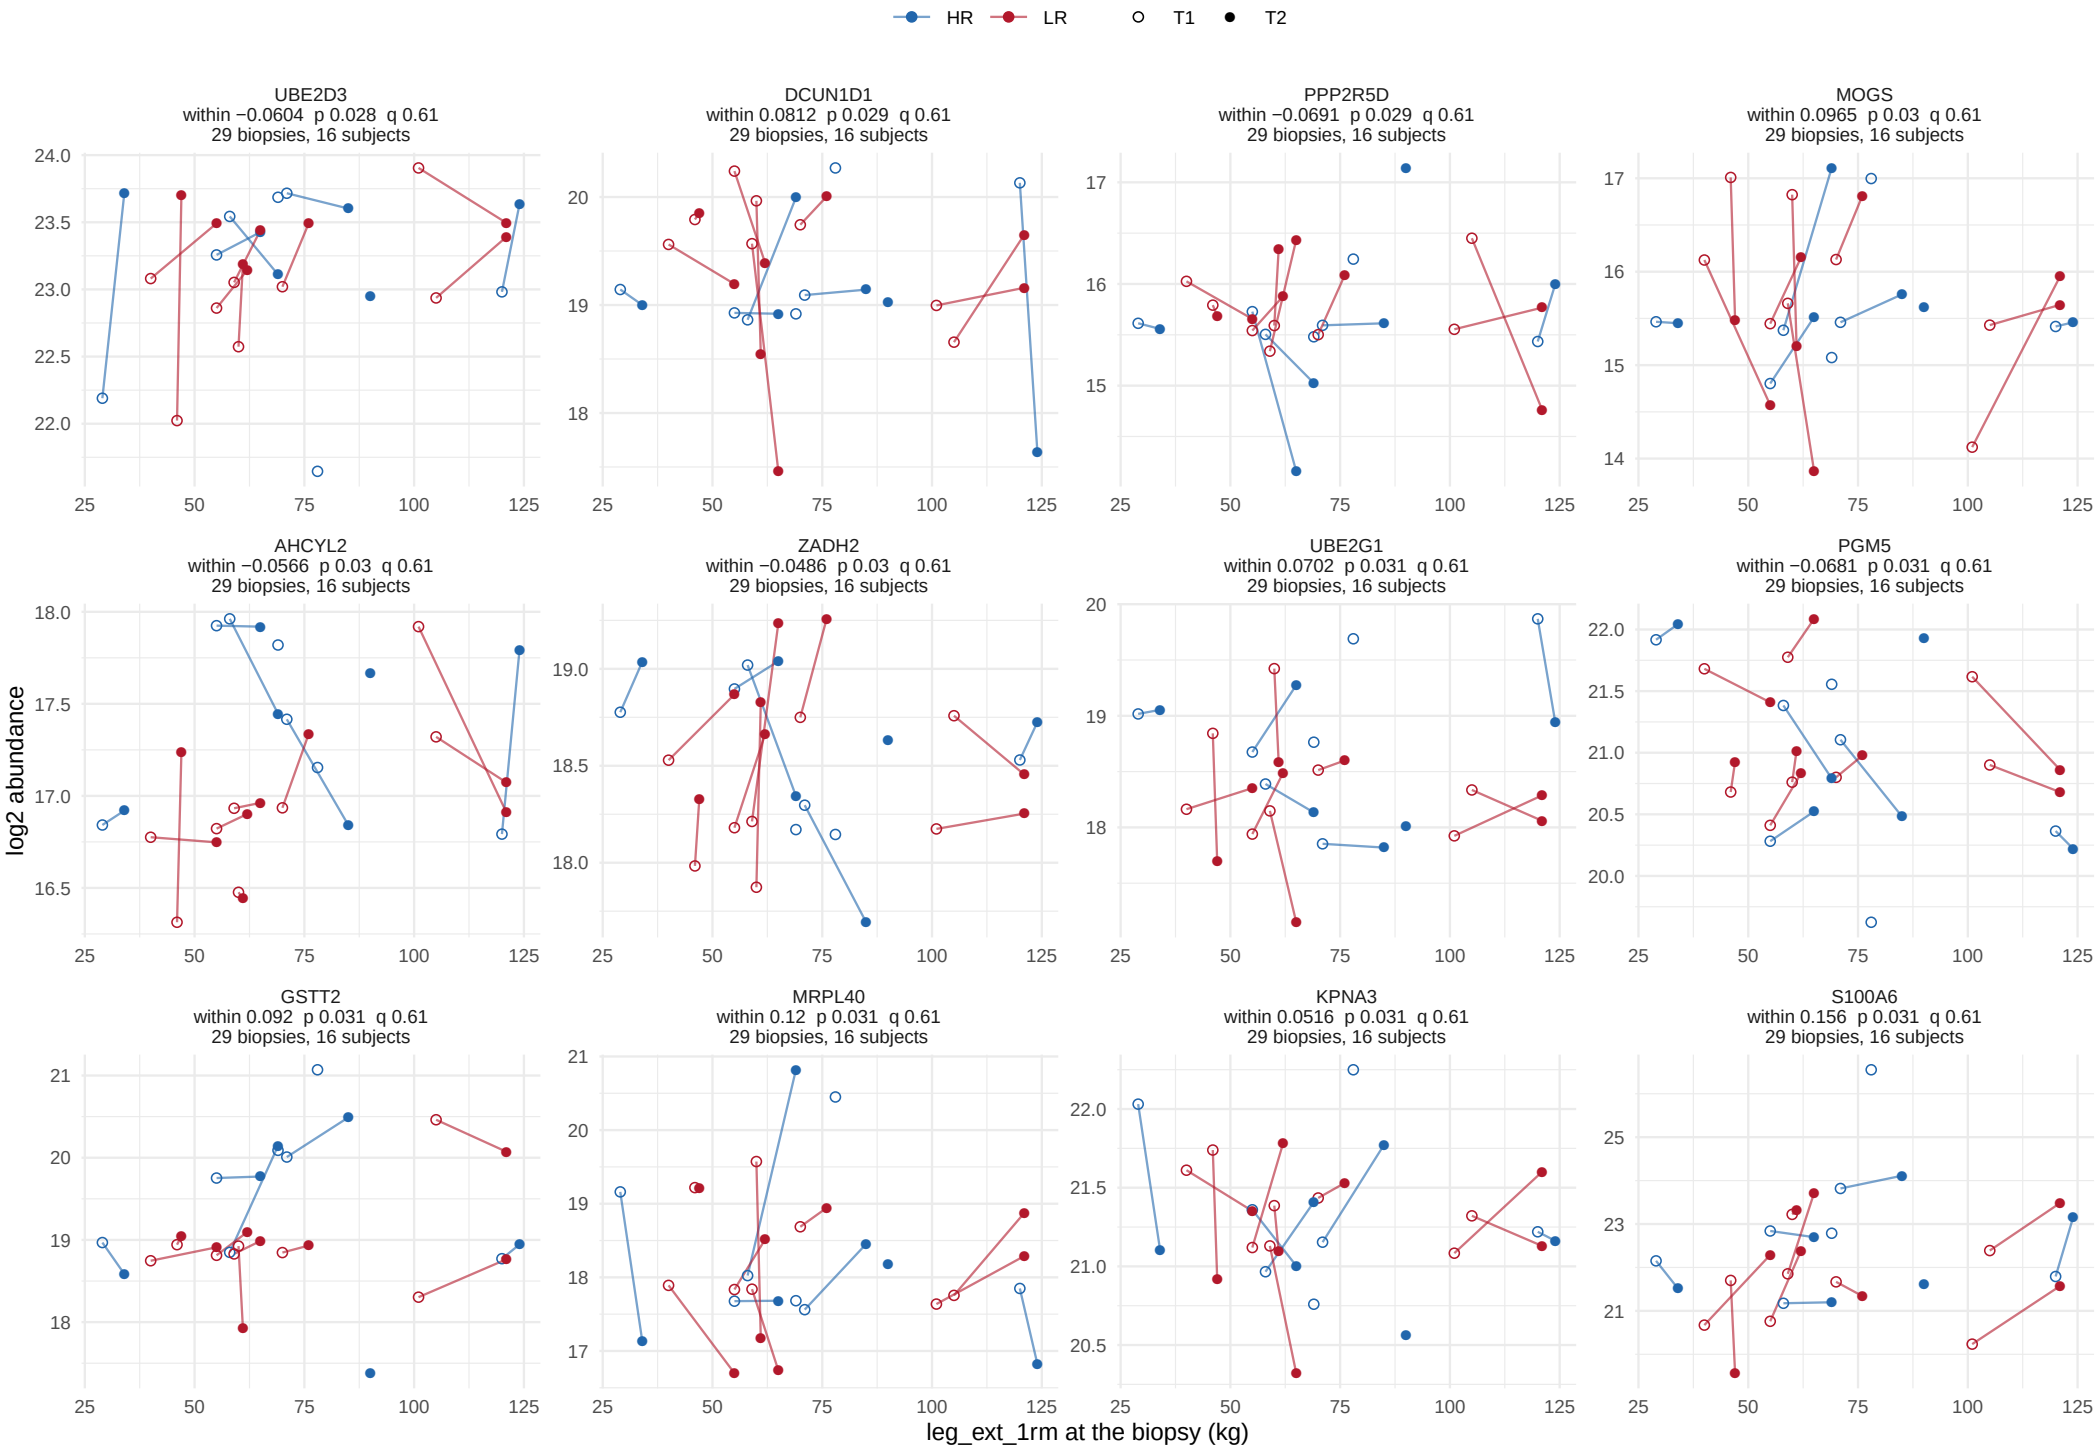

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_ext_1rm, within−person term


135 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 9 of 12.

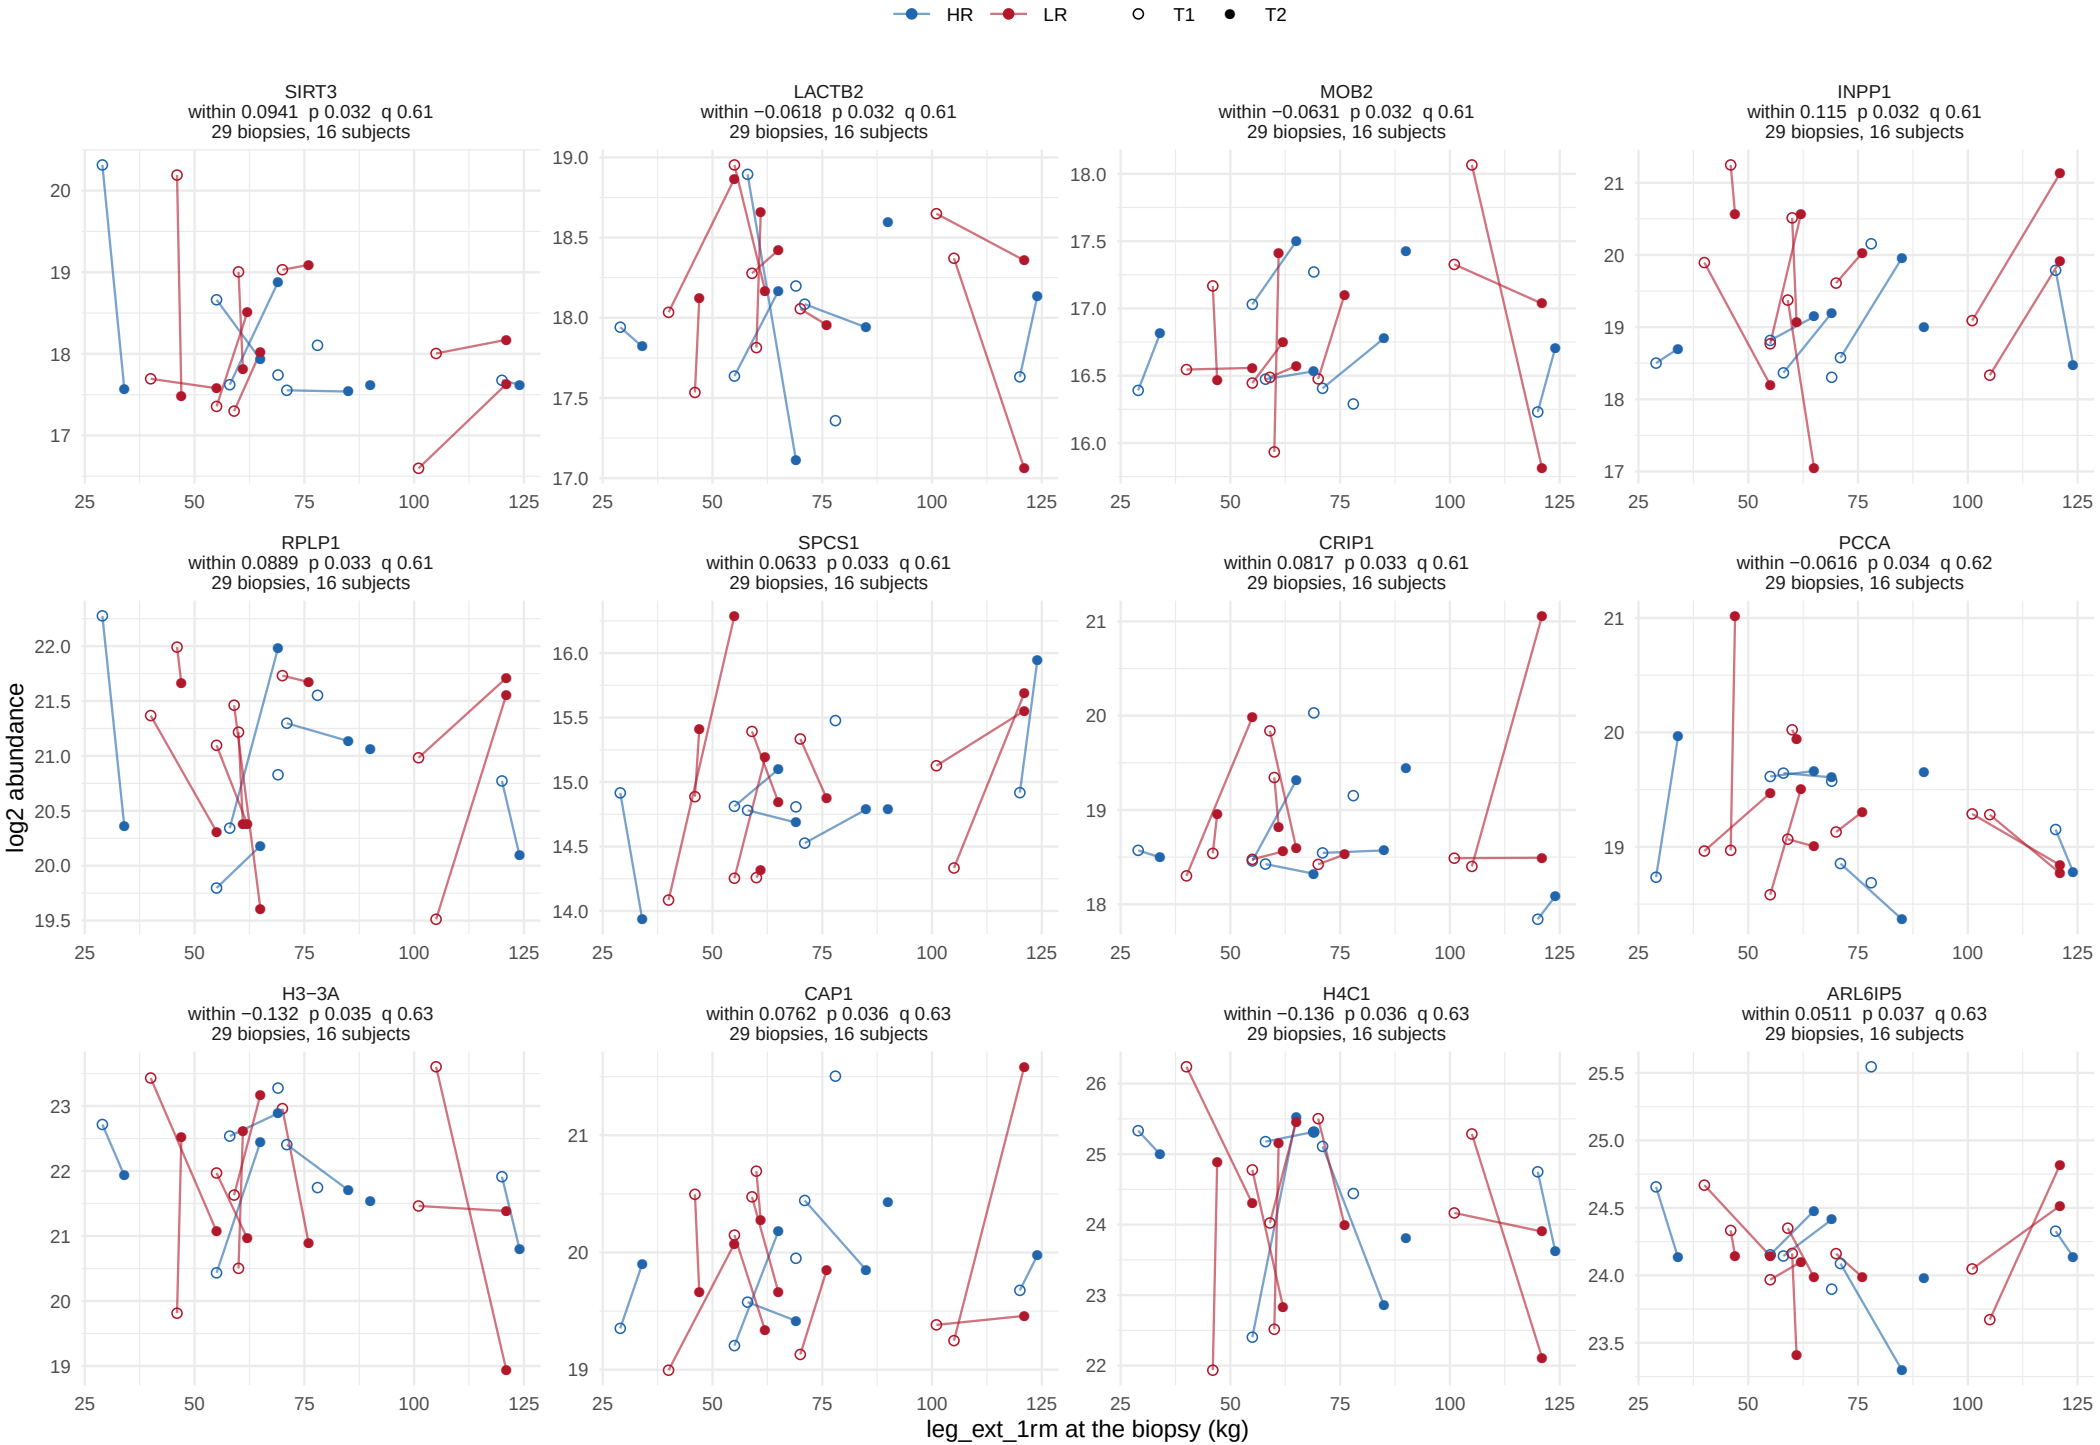

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_ext_1rm, within−person term


135 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 10 of 12.

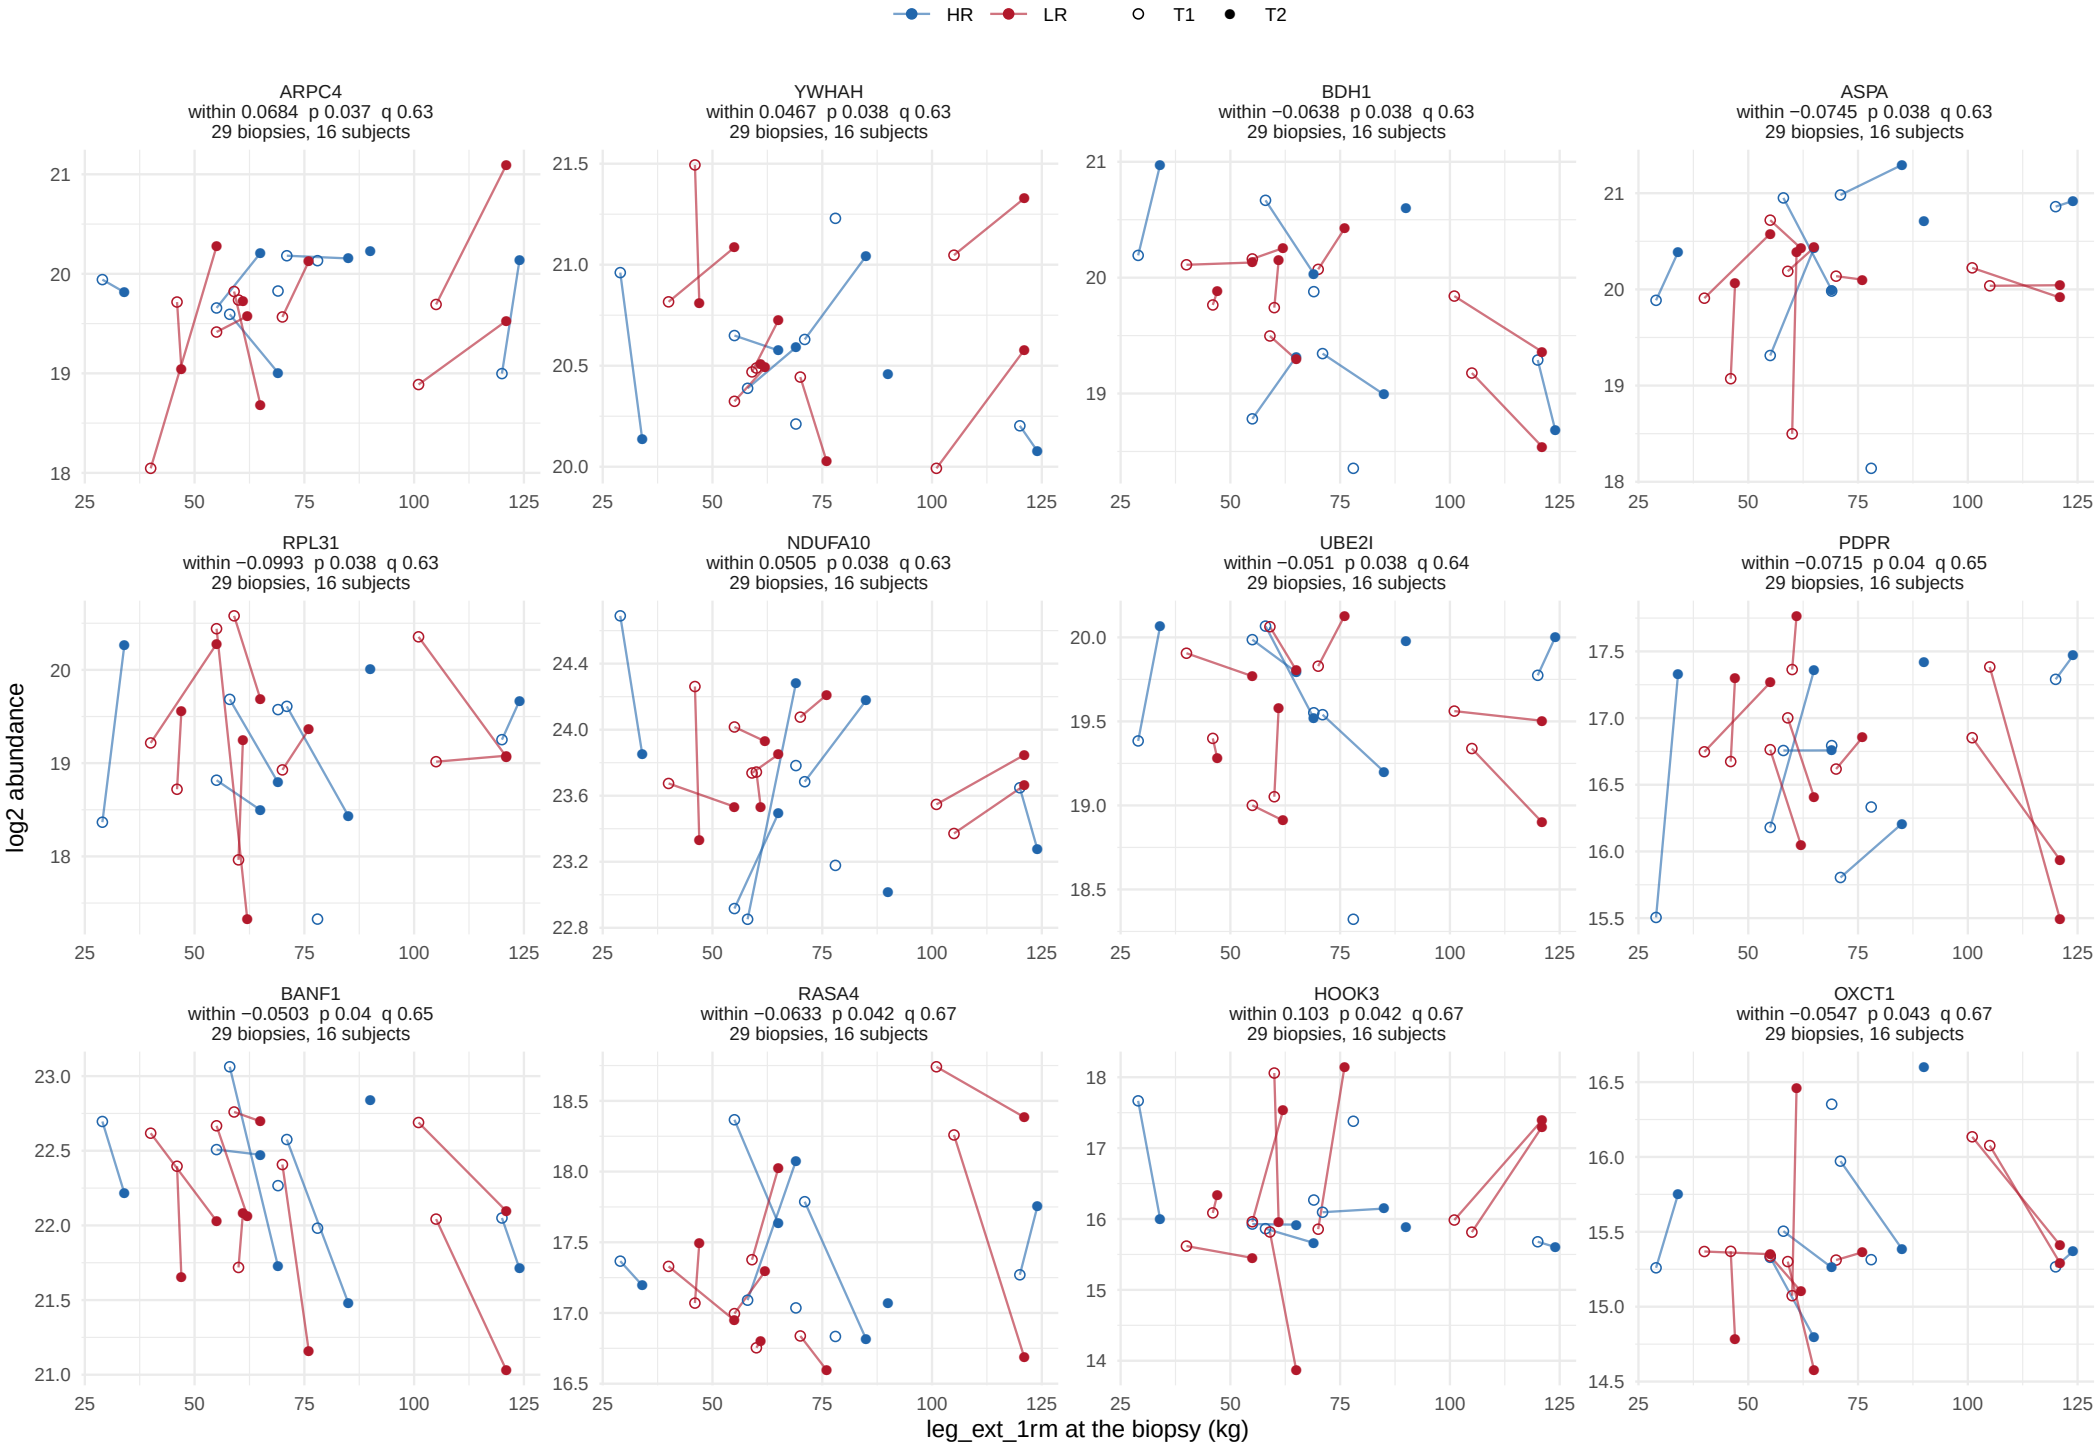

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_ext_1rm, within−person term

135 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 11 of 12.

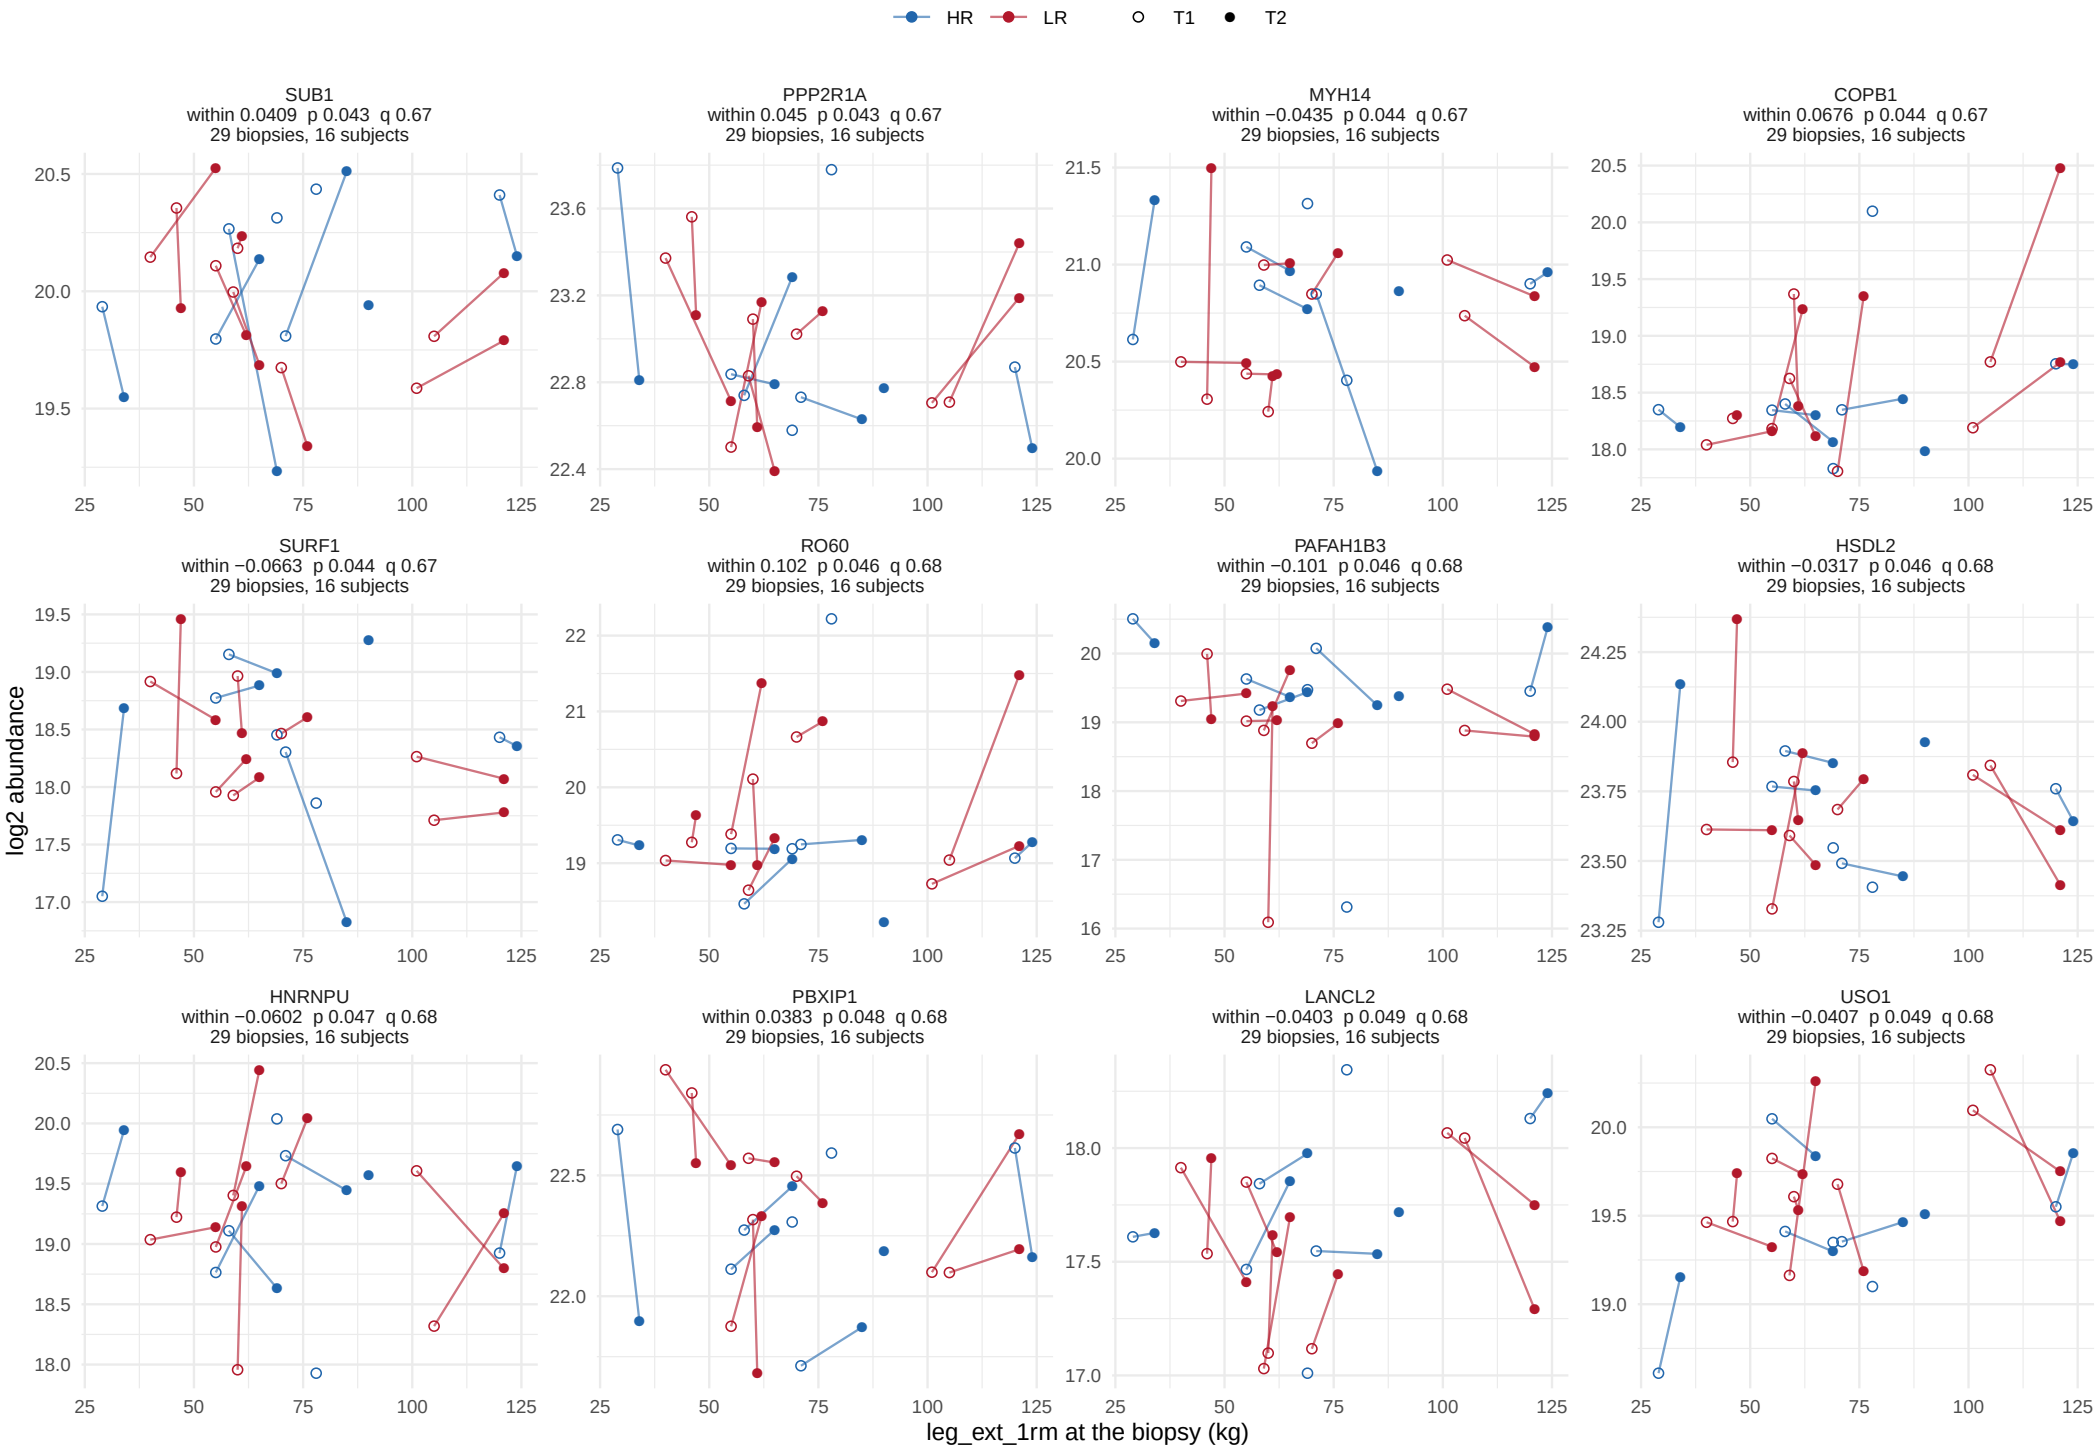

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_ext_1rm, within−person term


135 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 12 of 12.



limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_ext_1rm, between−person term


121 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 1 of 11.

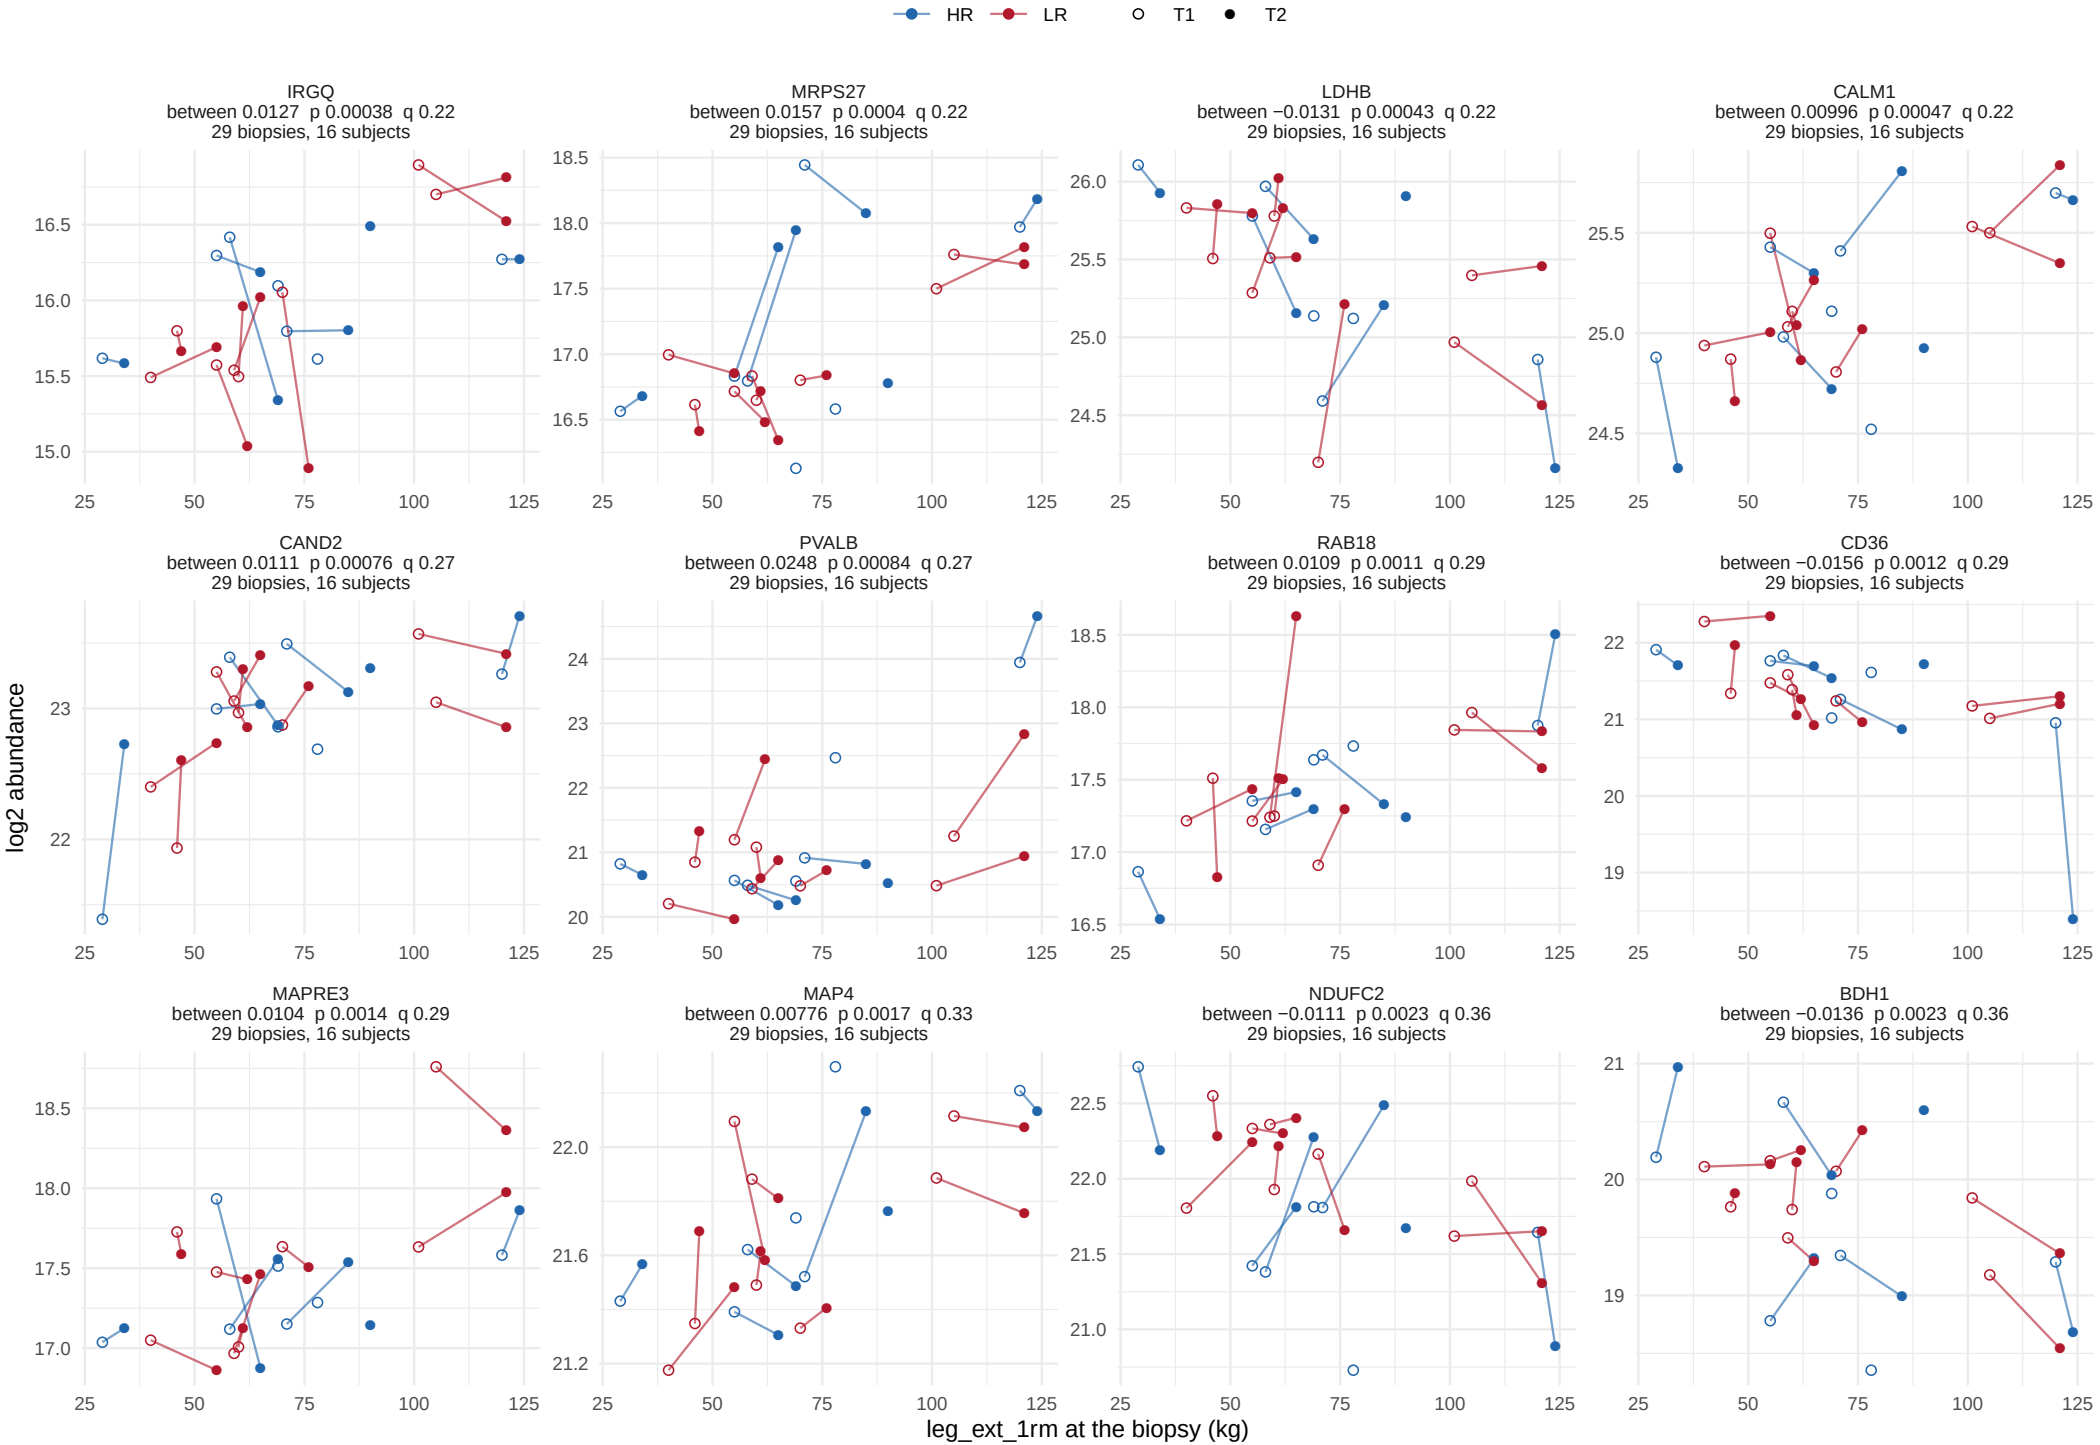

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_ext_1rm, between−person term


121 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 2 of 11.

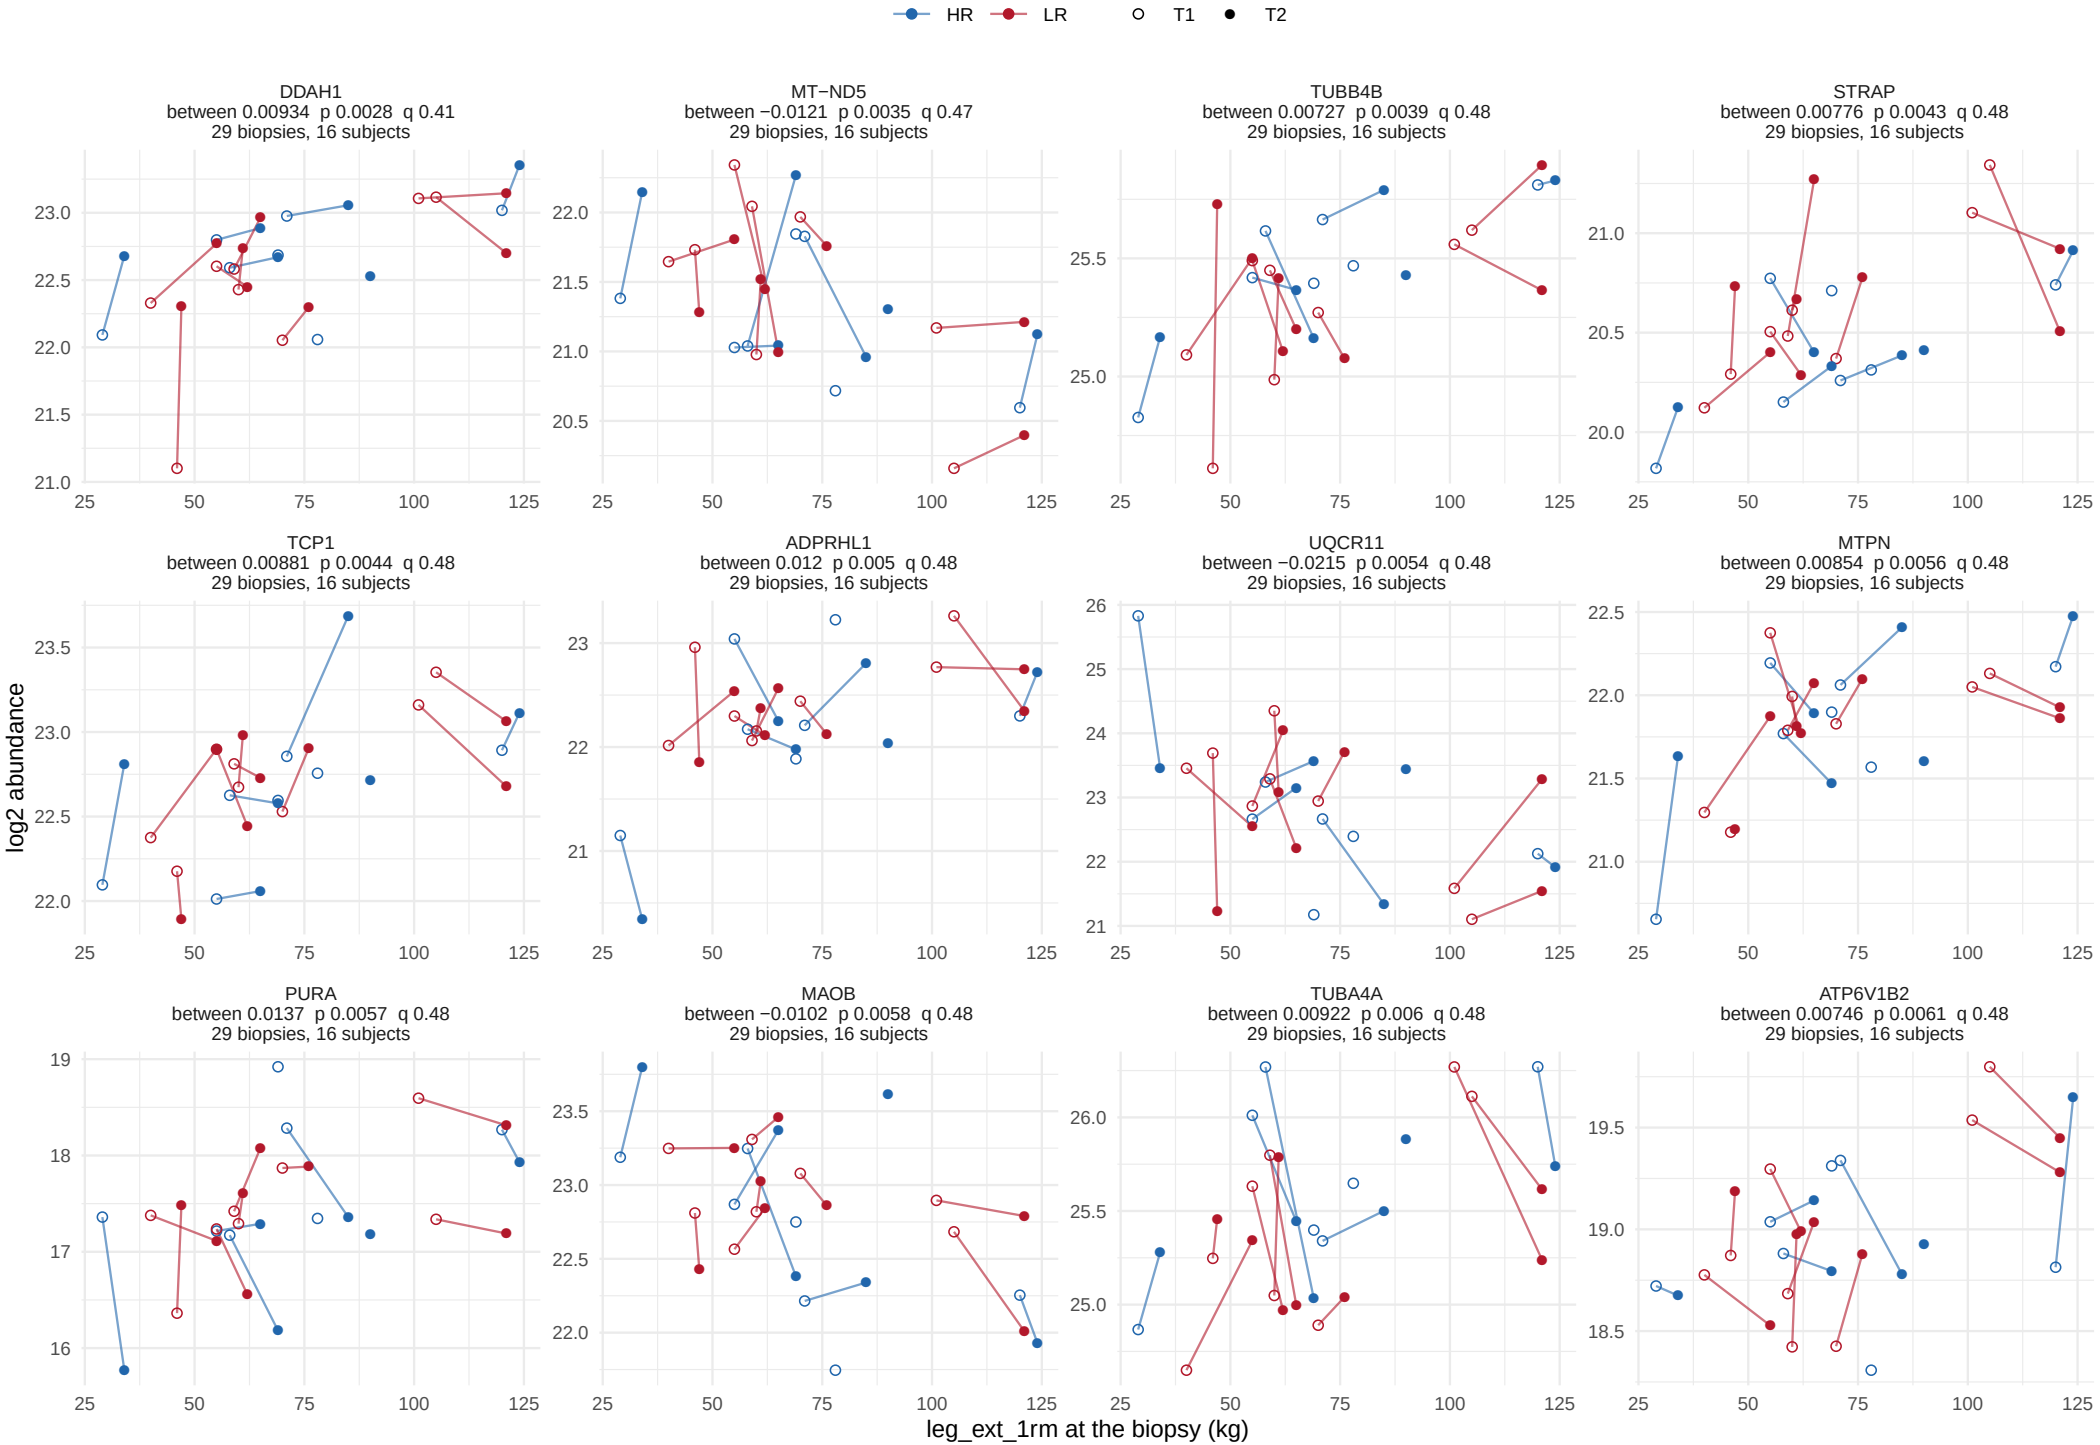

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_ext_1rm, between−person term


121 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 3 of 11.

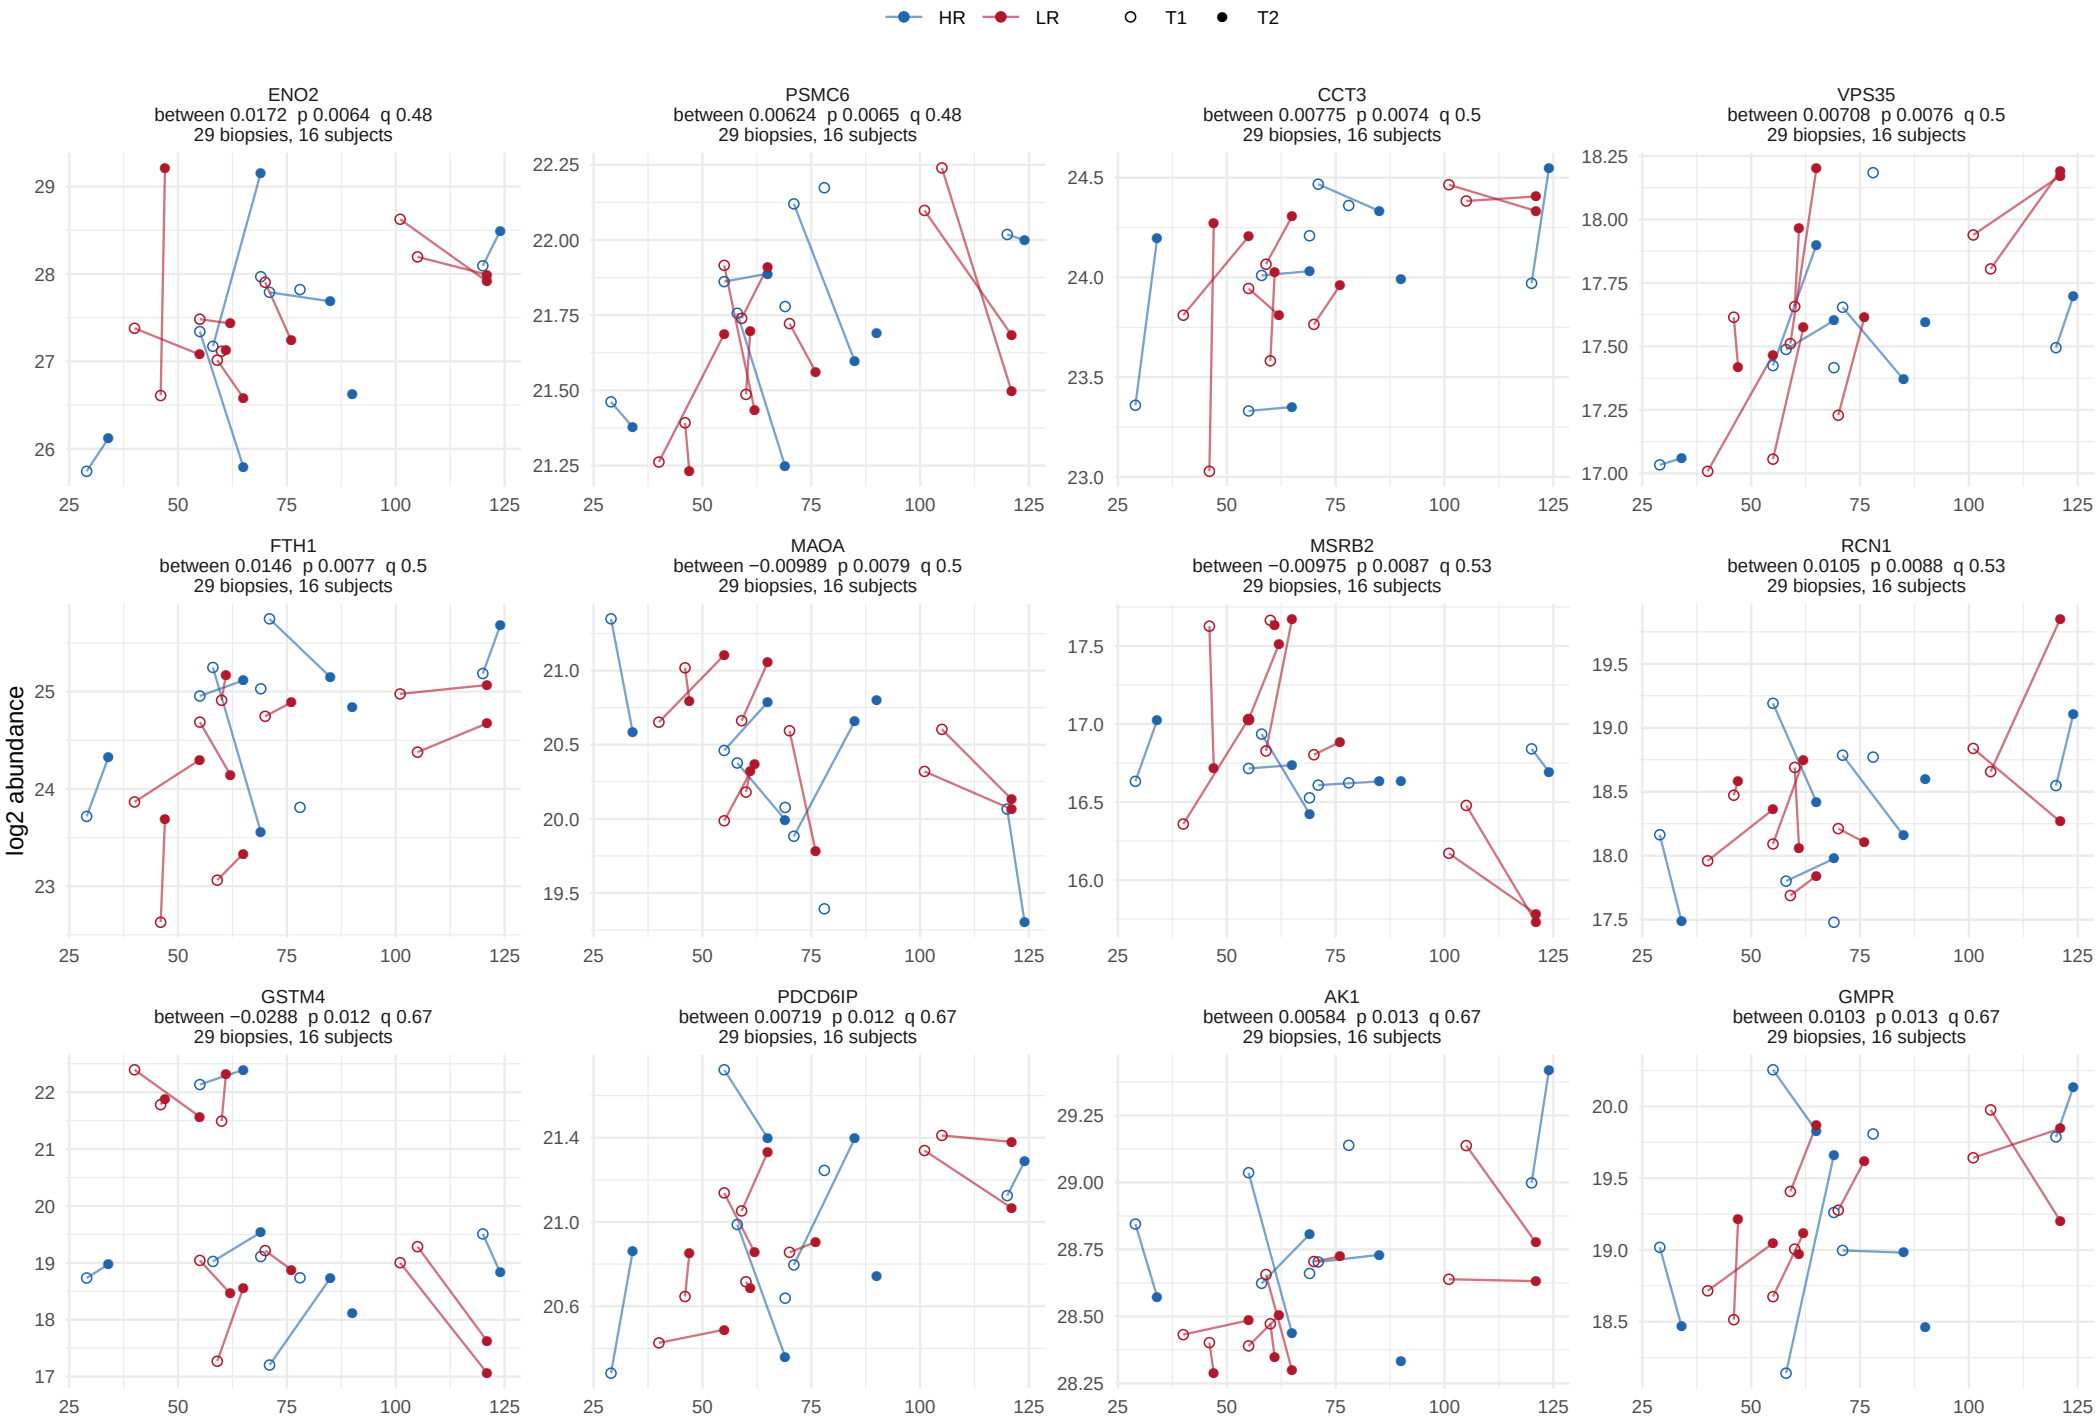

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_ext_1rm, between−person term


121 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 4 of 11.

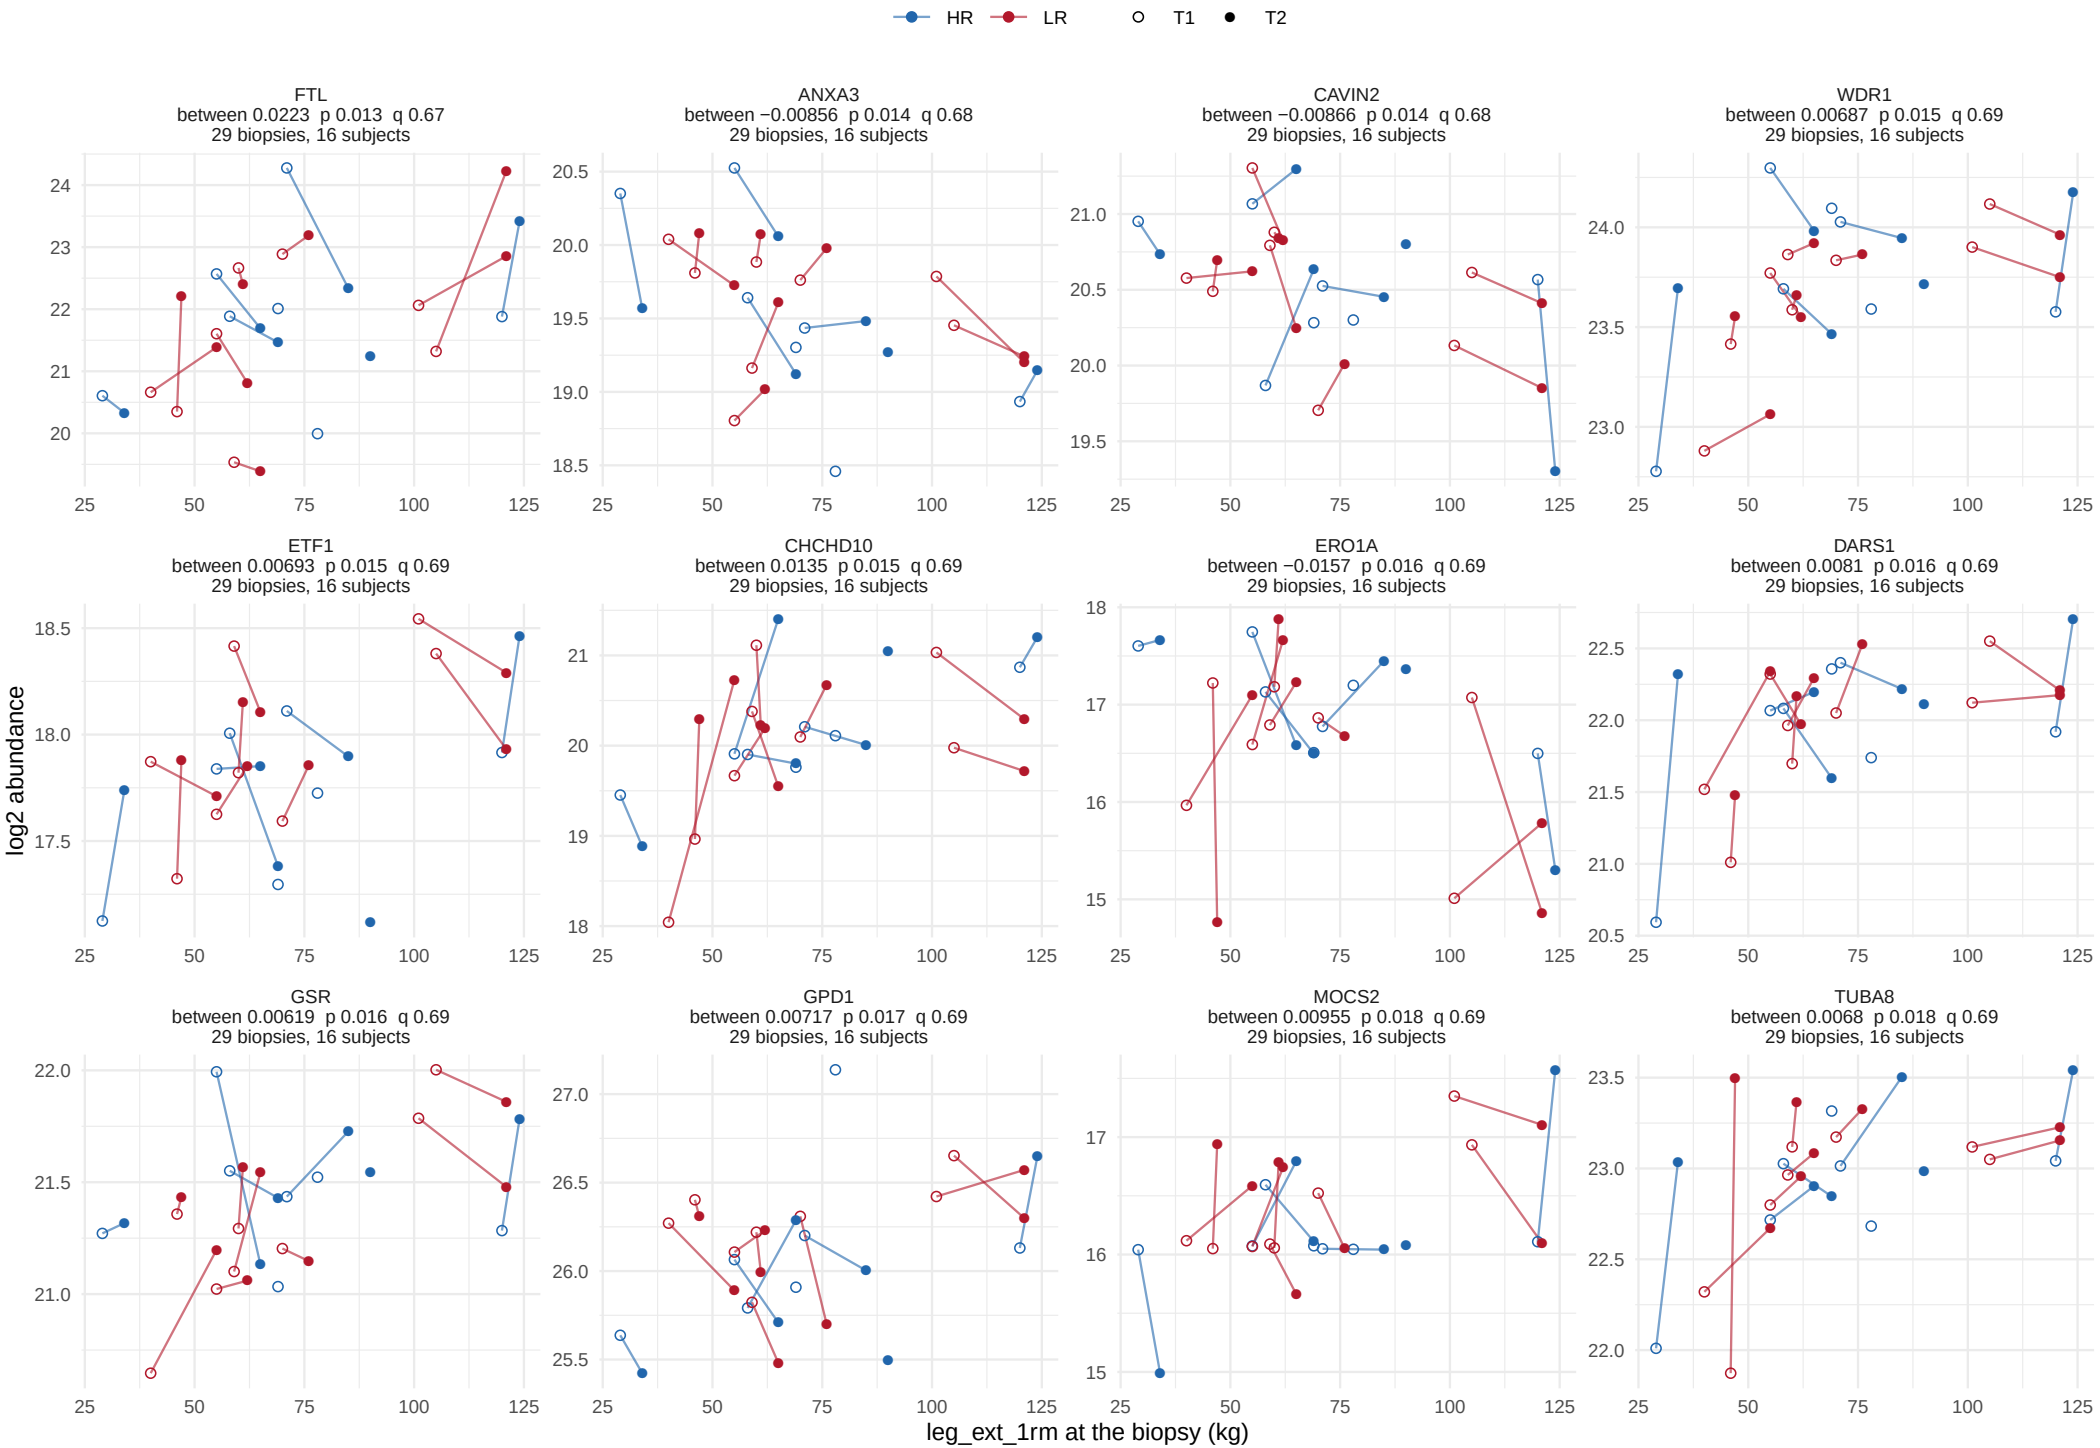

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_ext_1rm, between−person term


121 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 5 of 11.

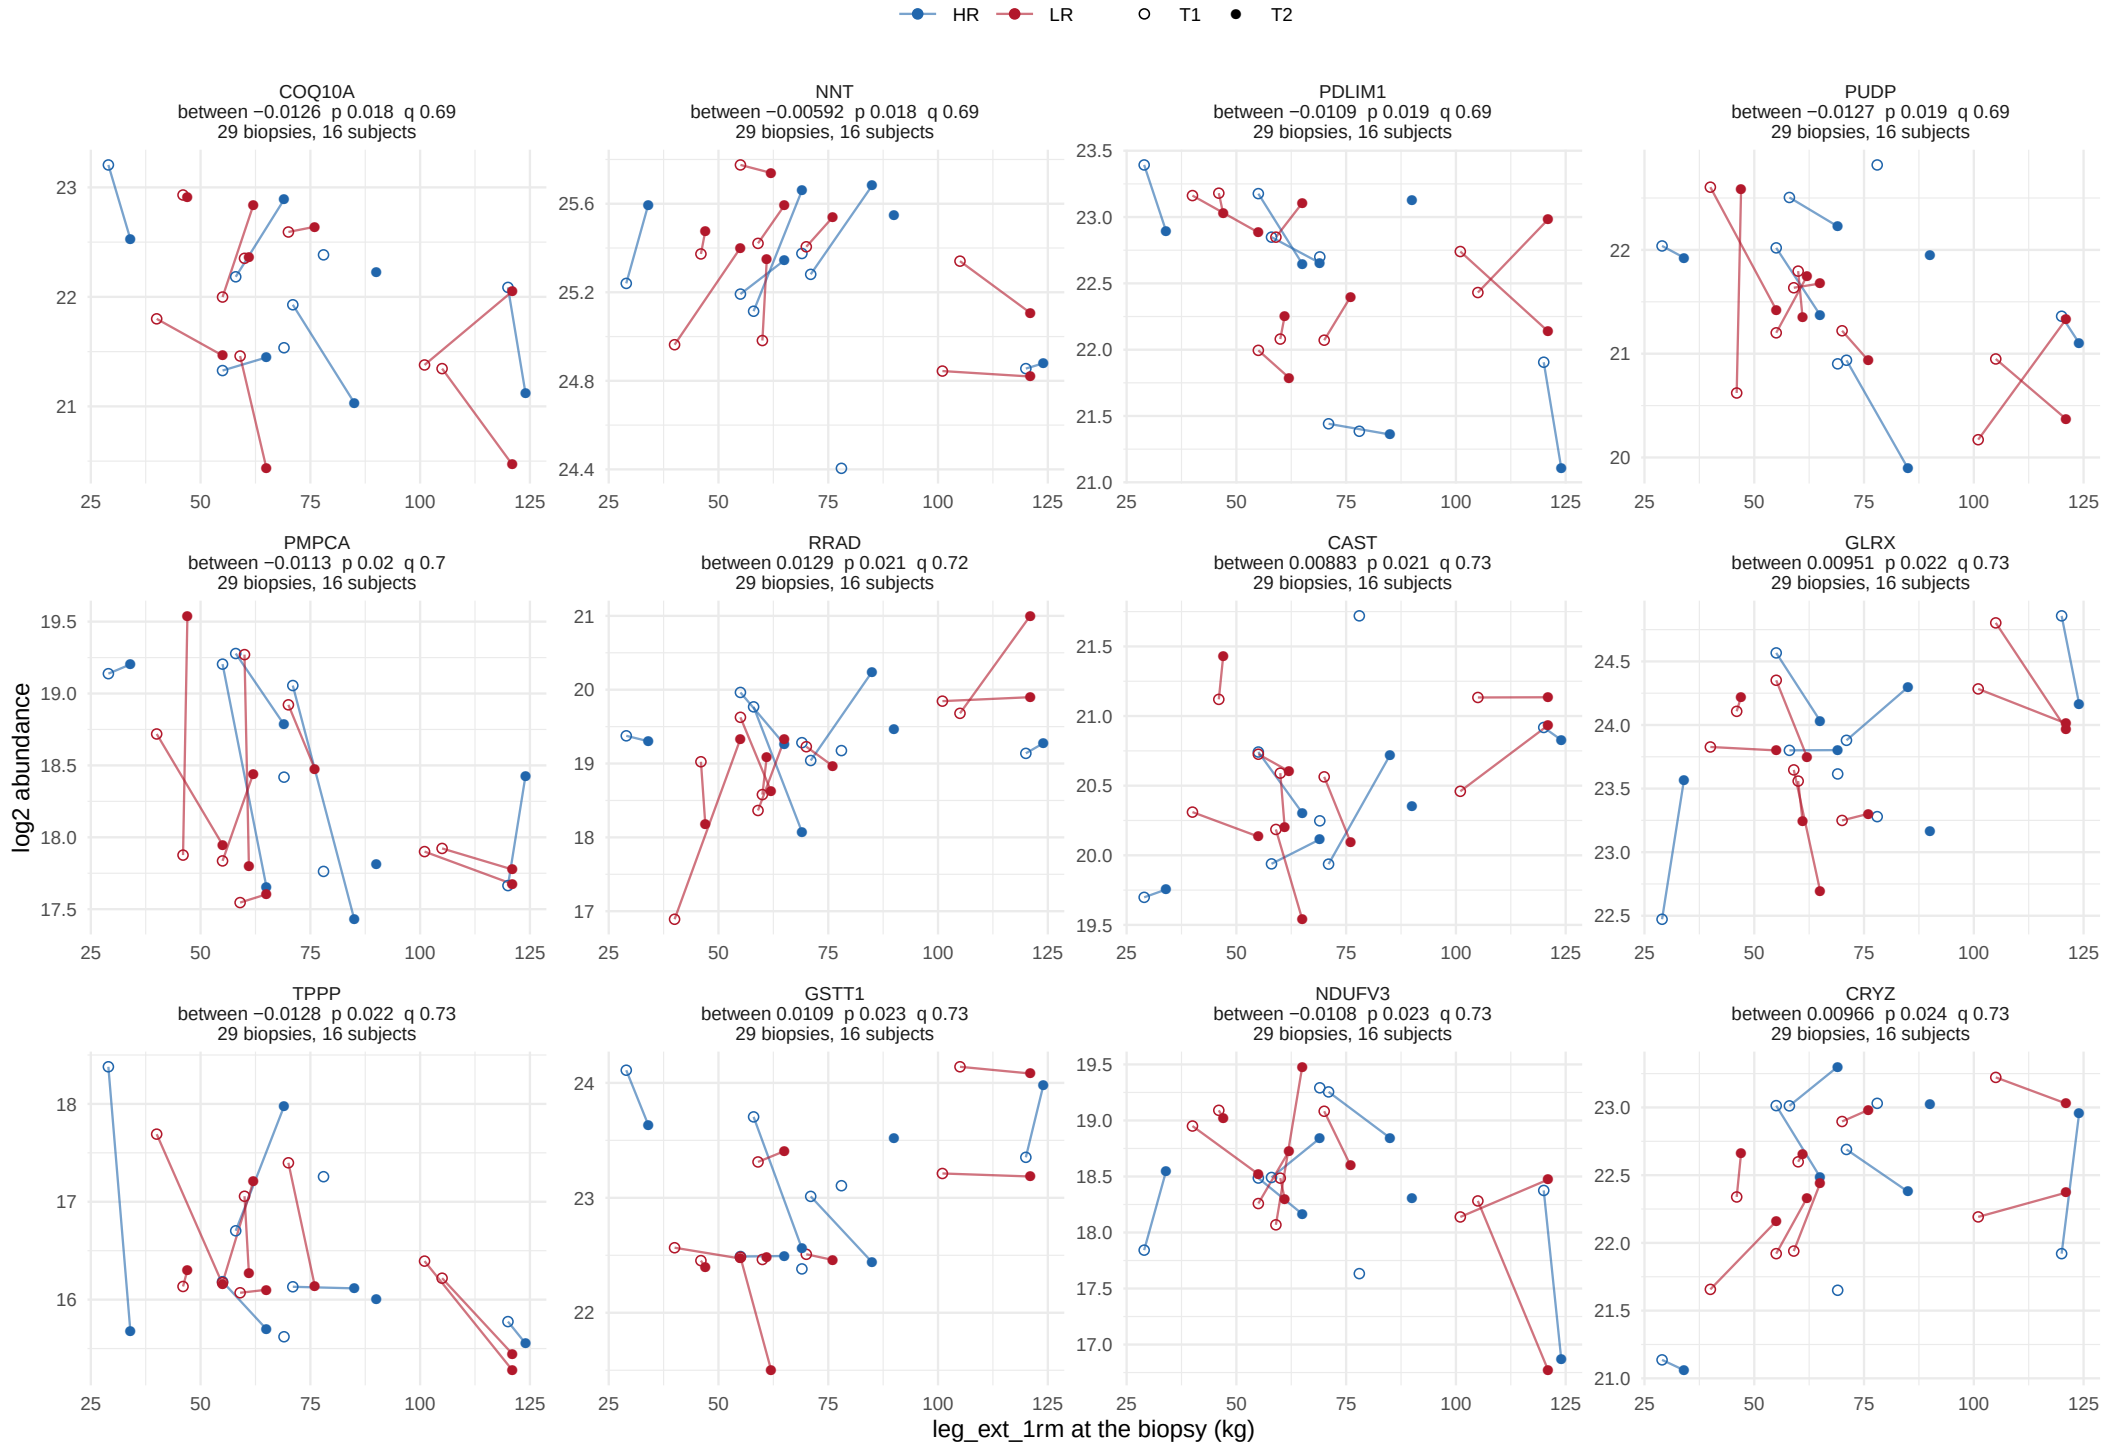

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_ext_1rm, between−person term


121 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 6 of 11.

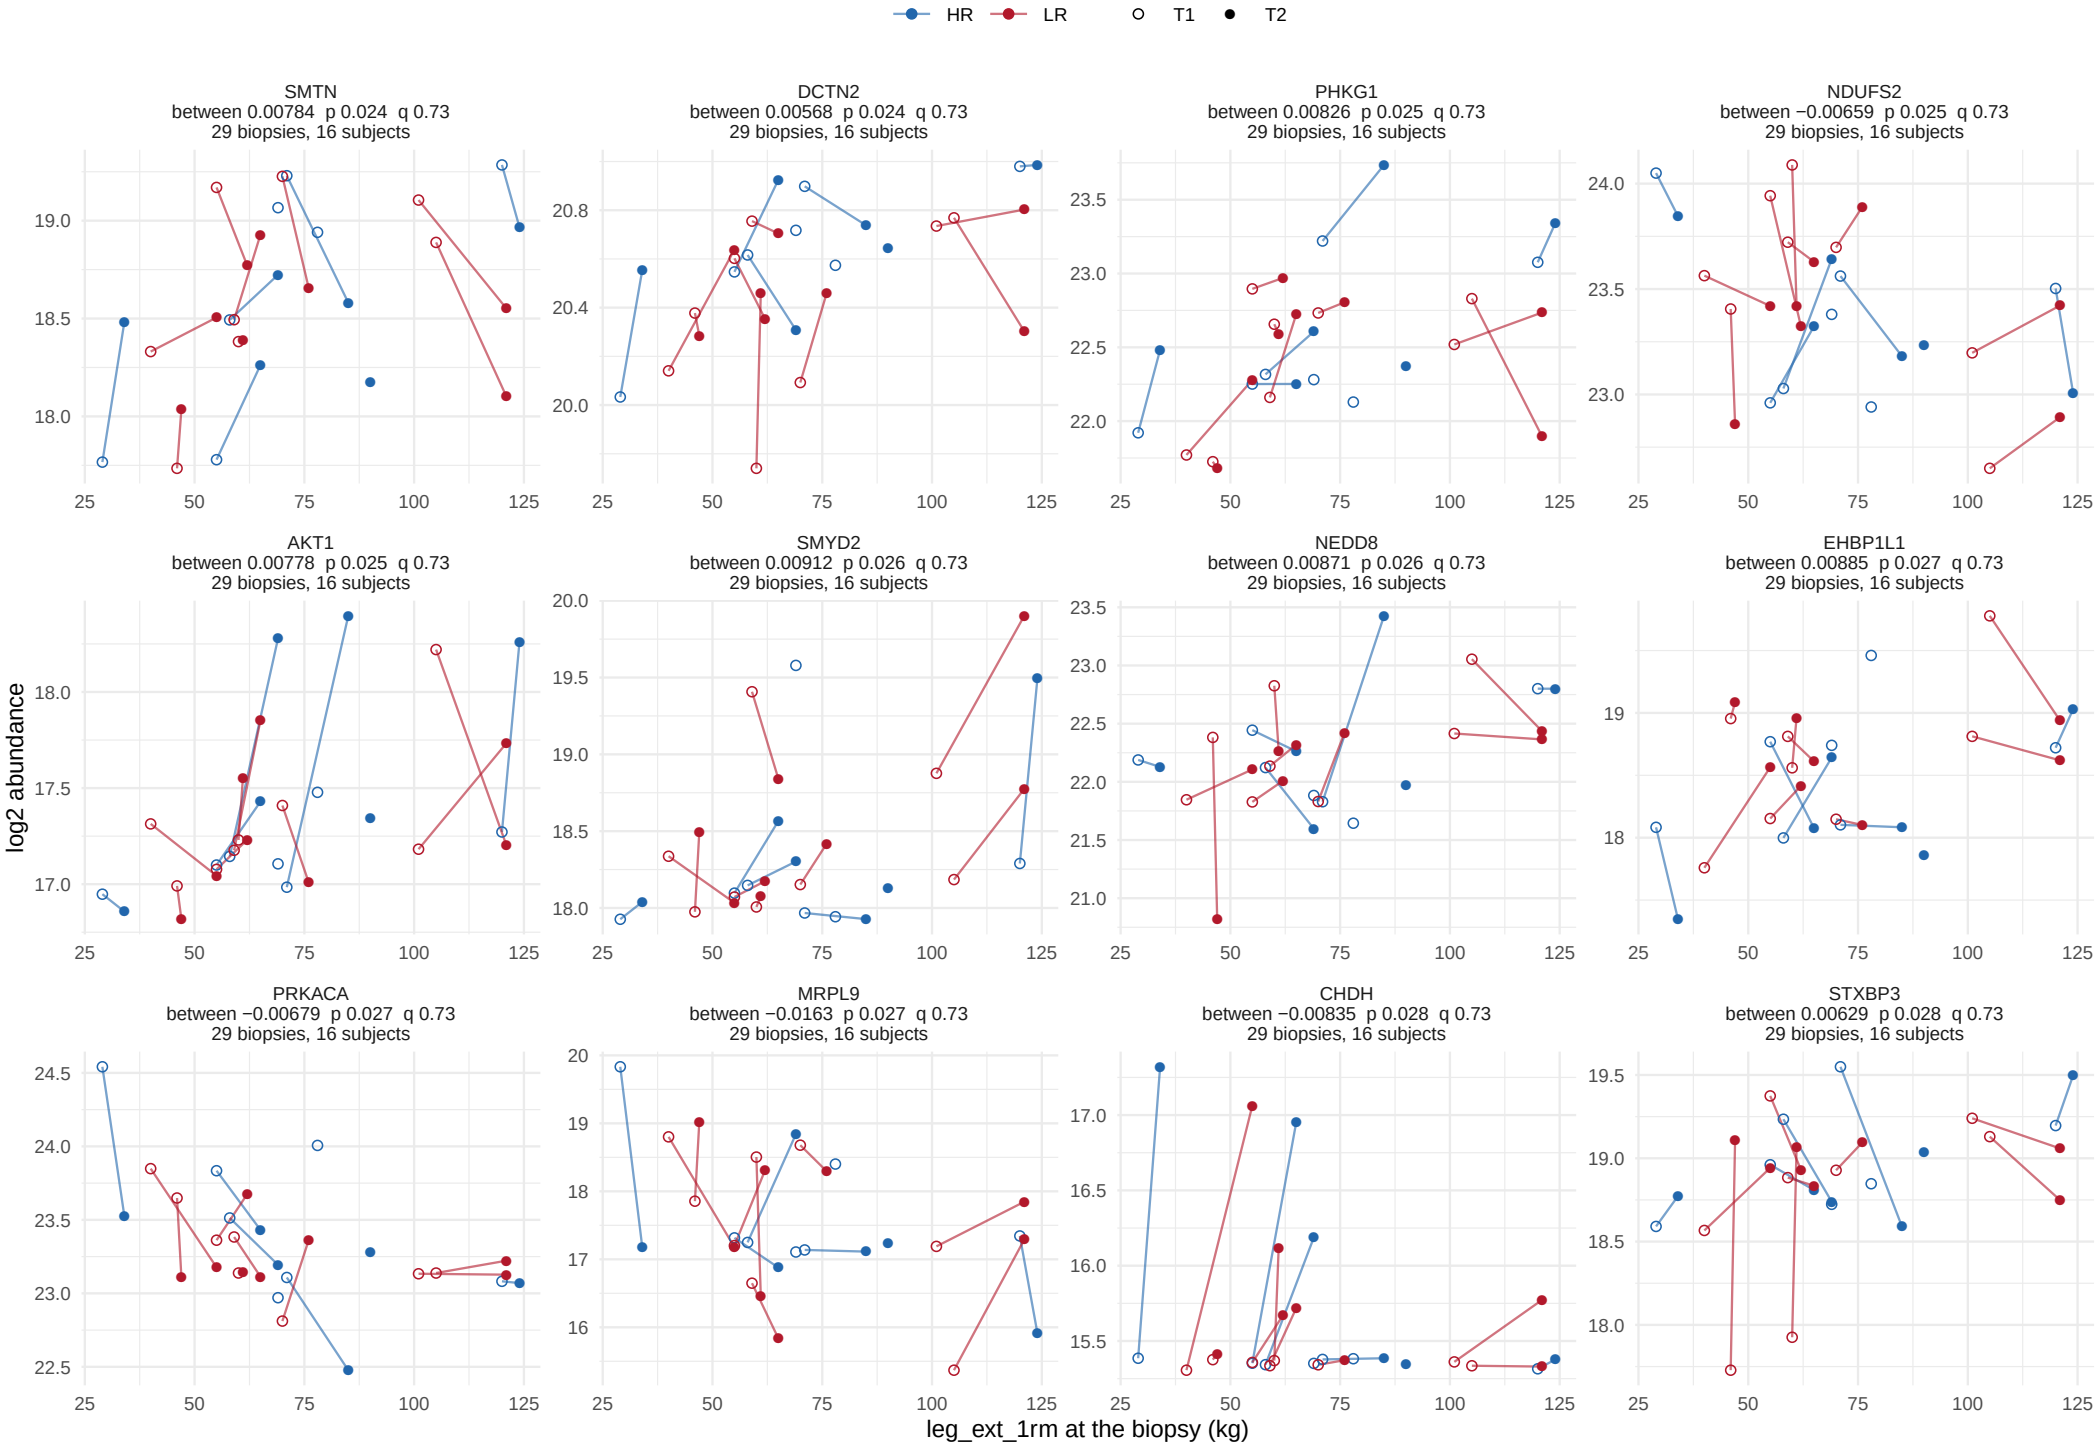

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_ext_1rm, between−person term


121 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 7 of 11.

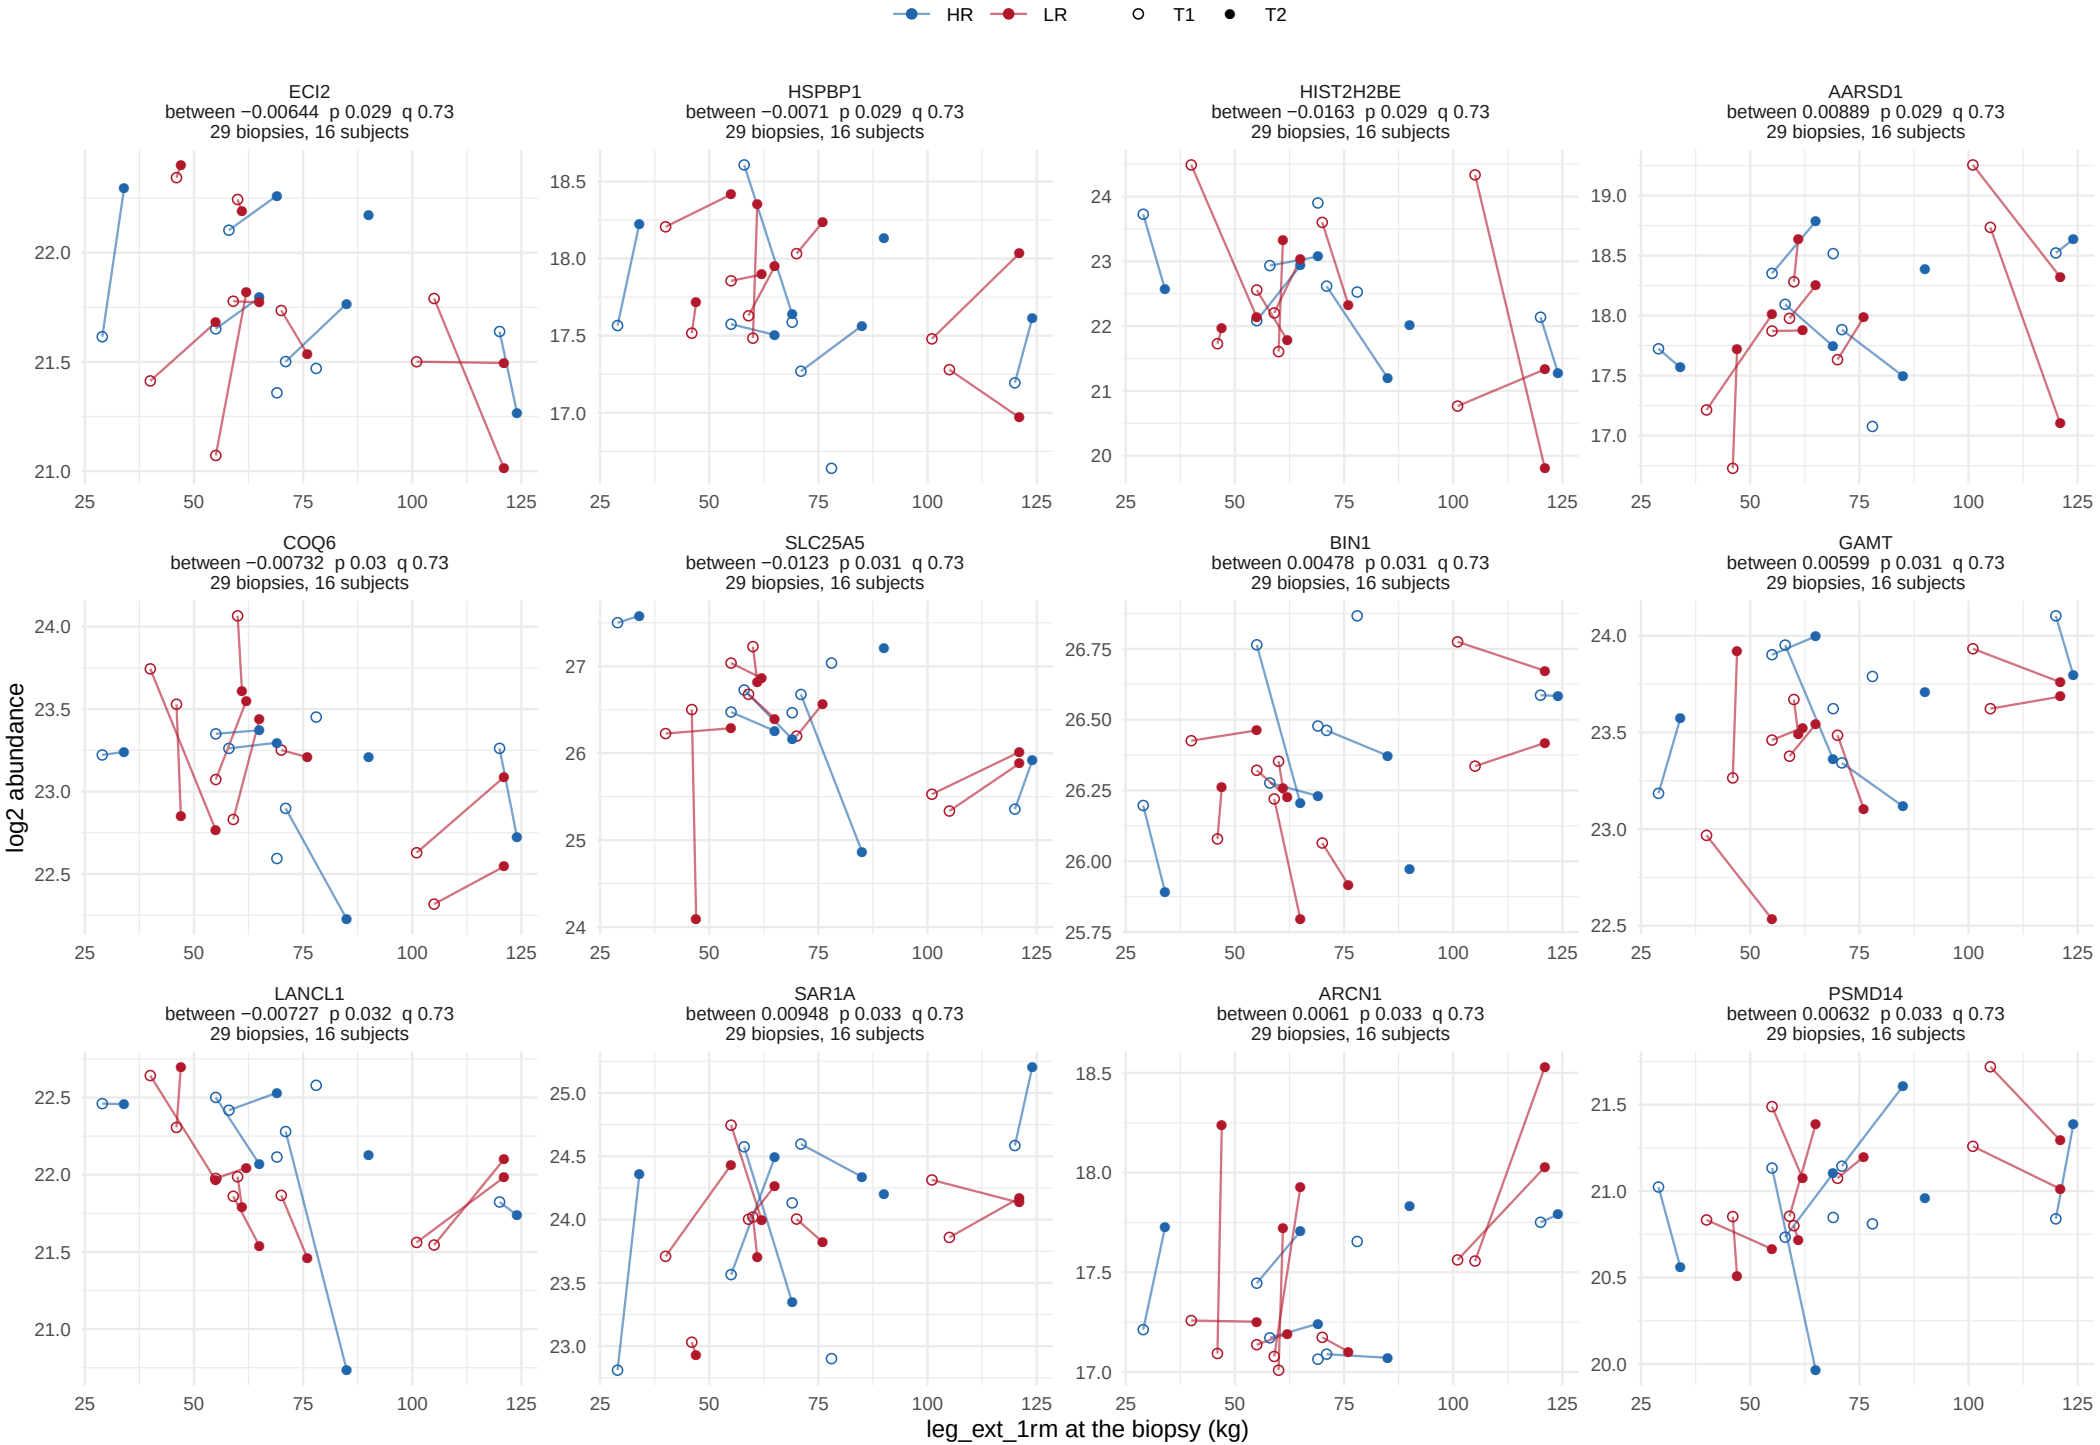

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_ext_1rm, between−person term


121 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 8 of 11.

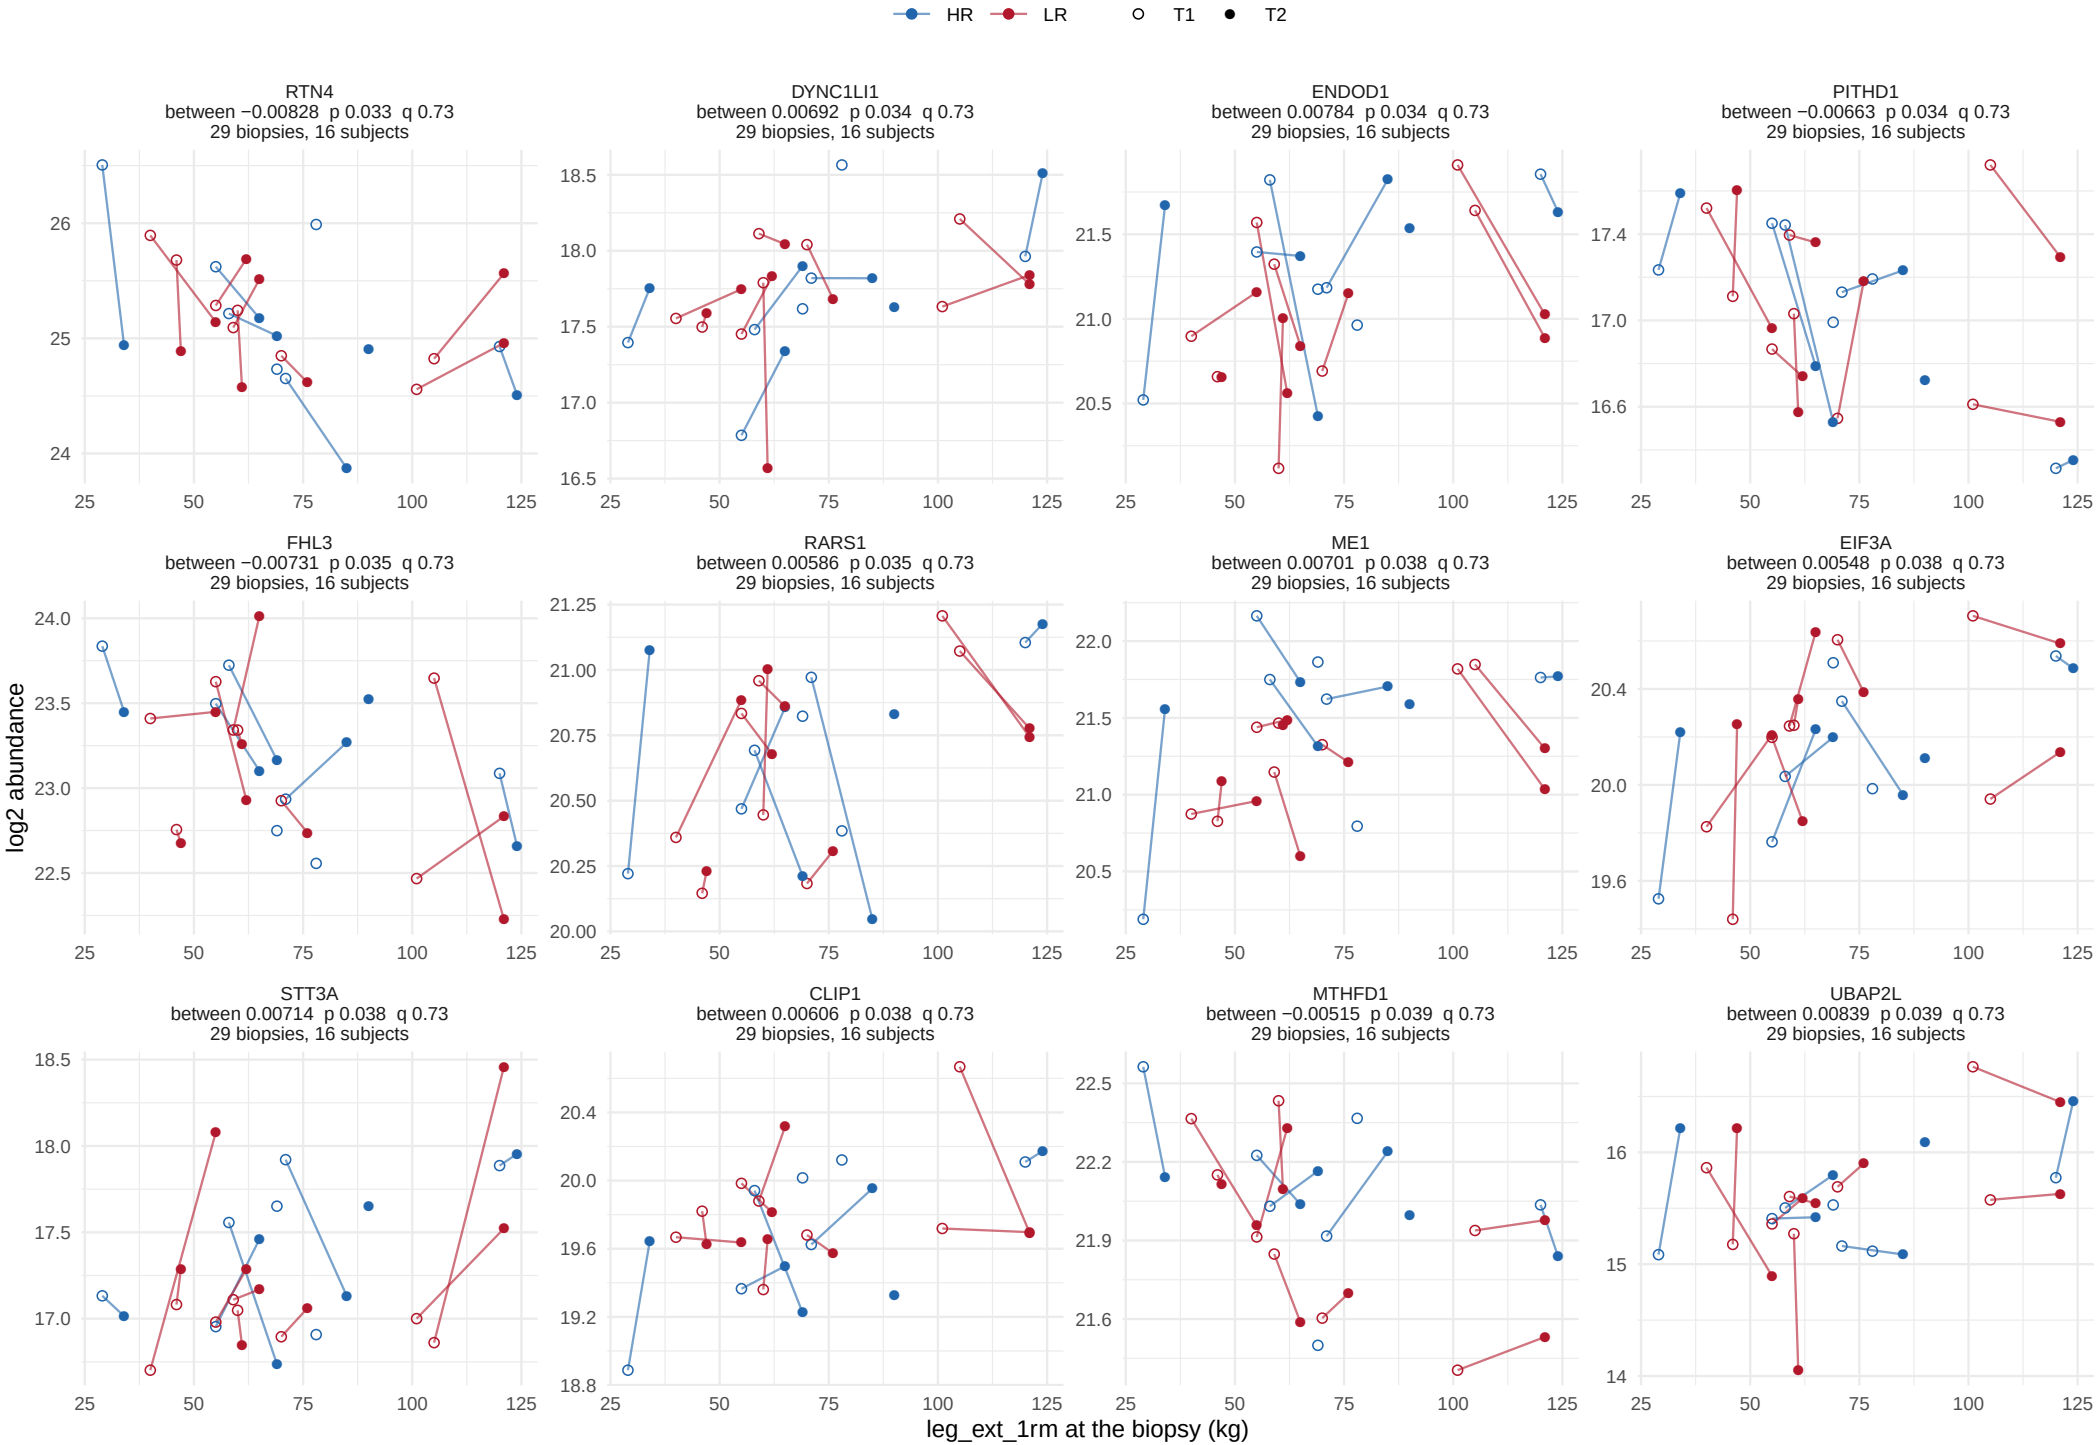

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_ext_1rm, between−person term


121 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 9 of 11.

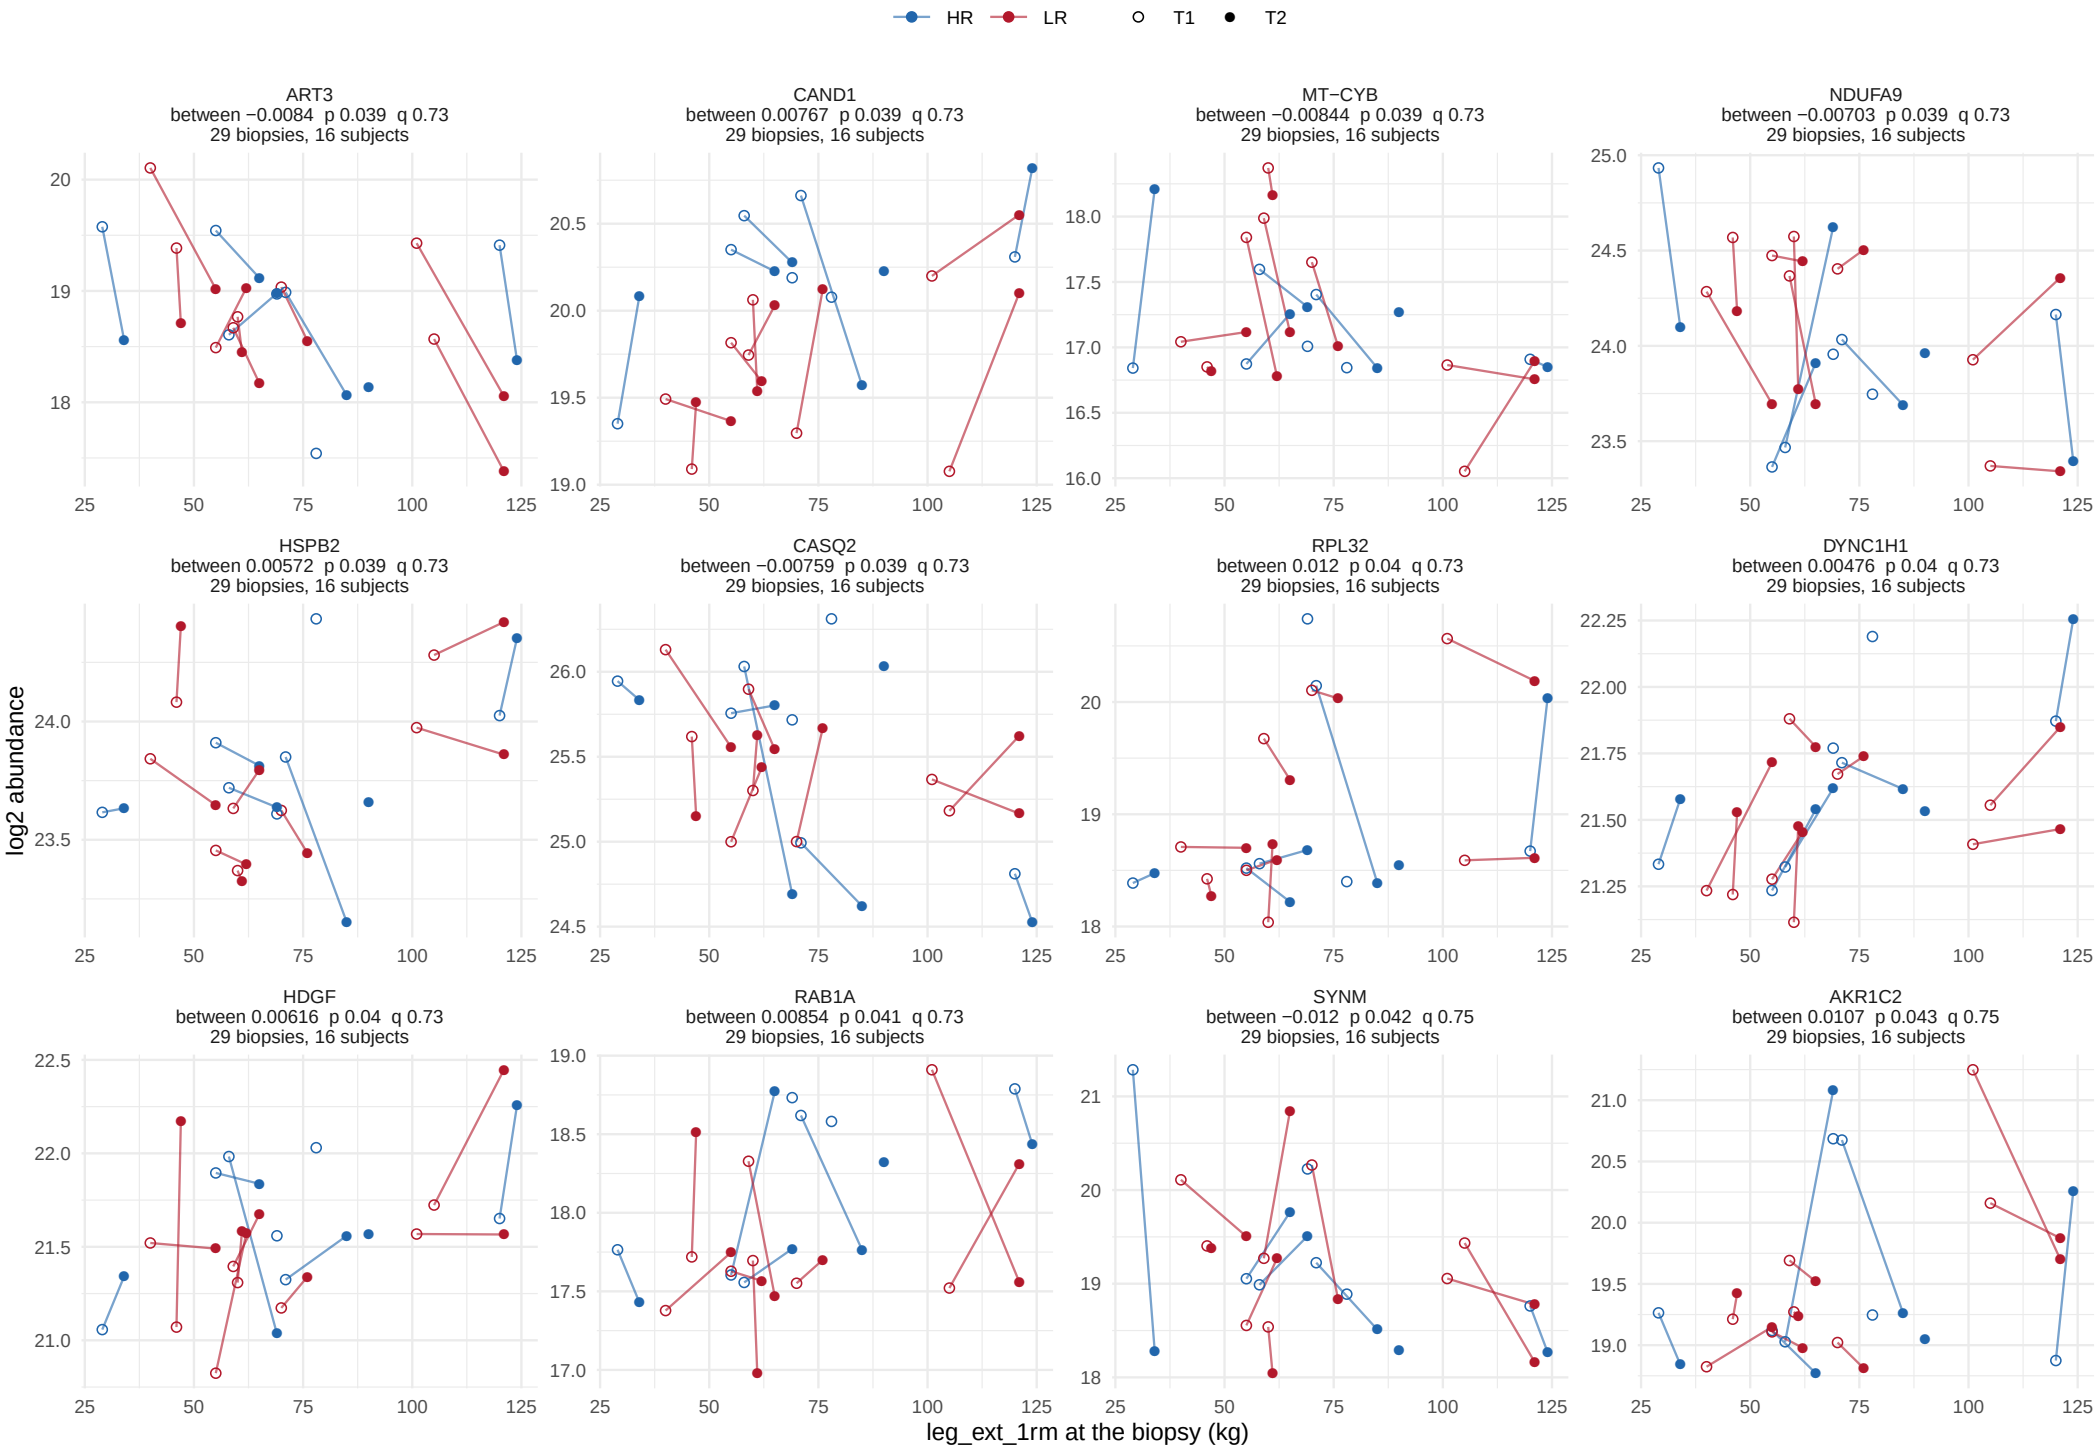

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_ext_1rm, between−person term


121 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 10 of 11.

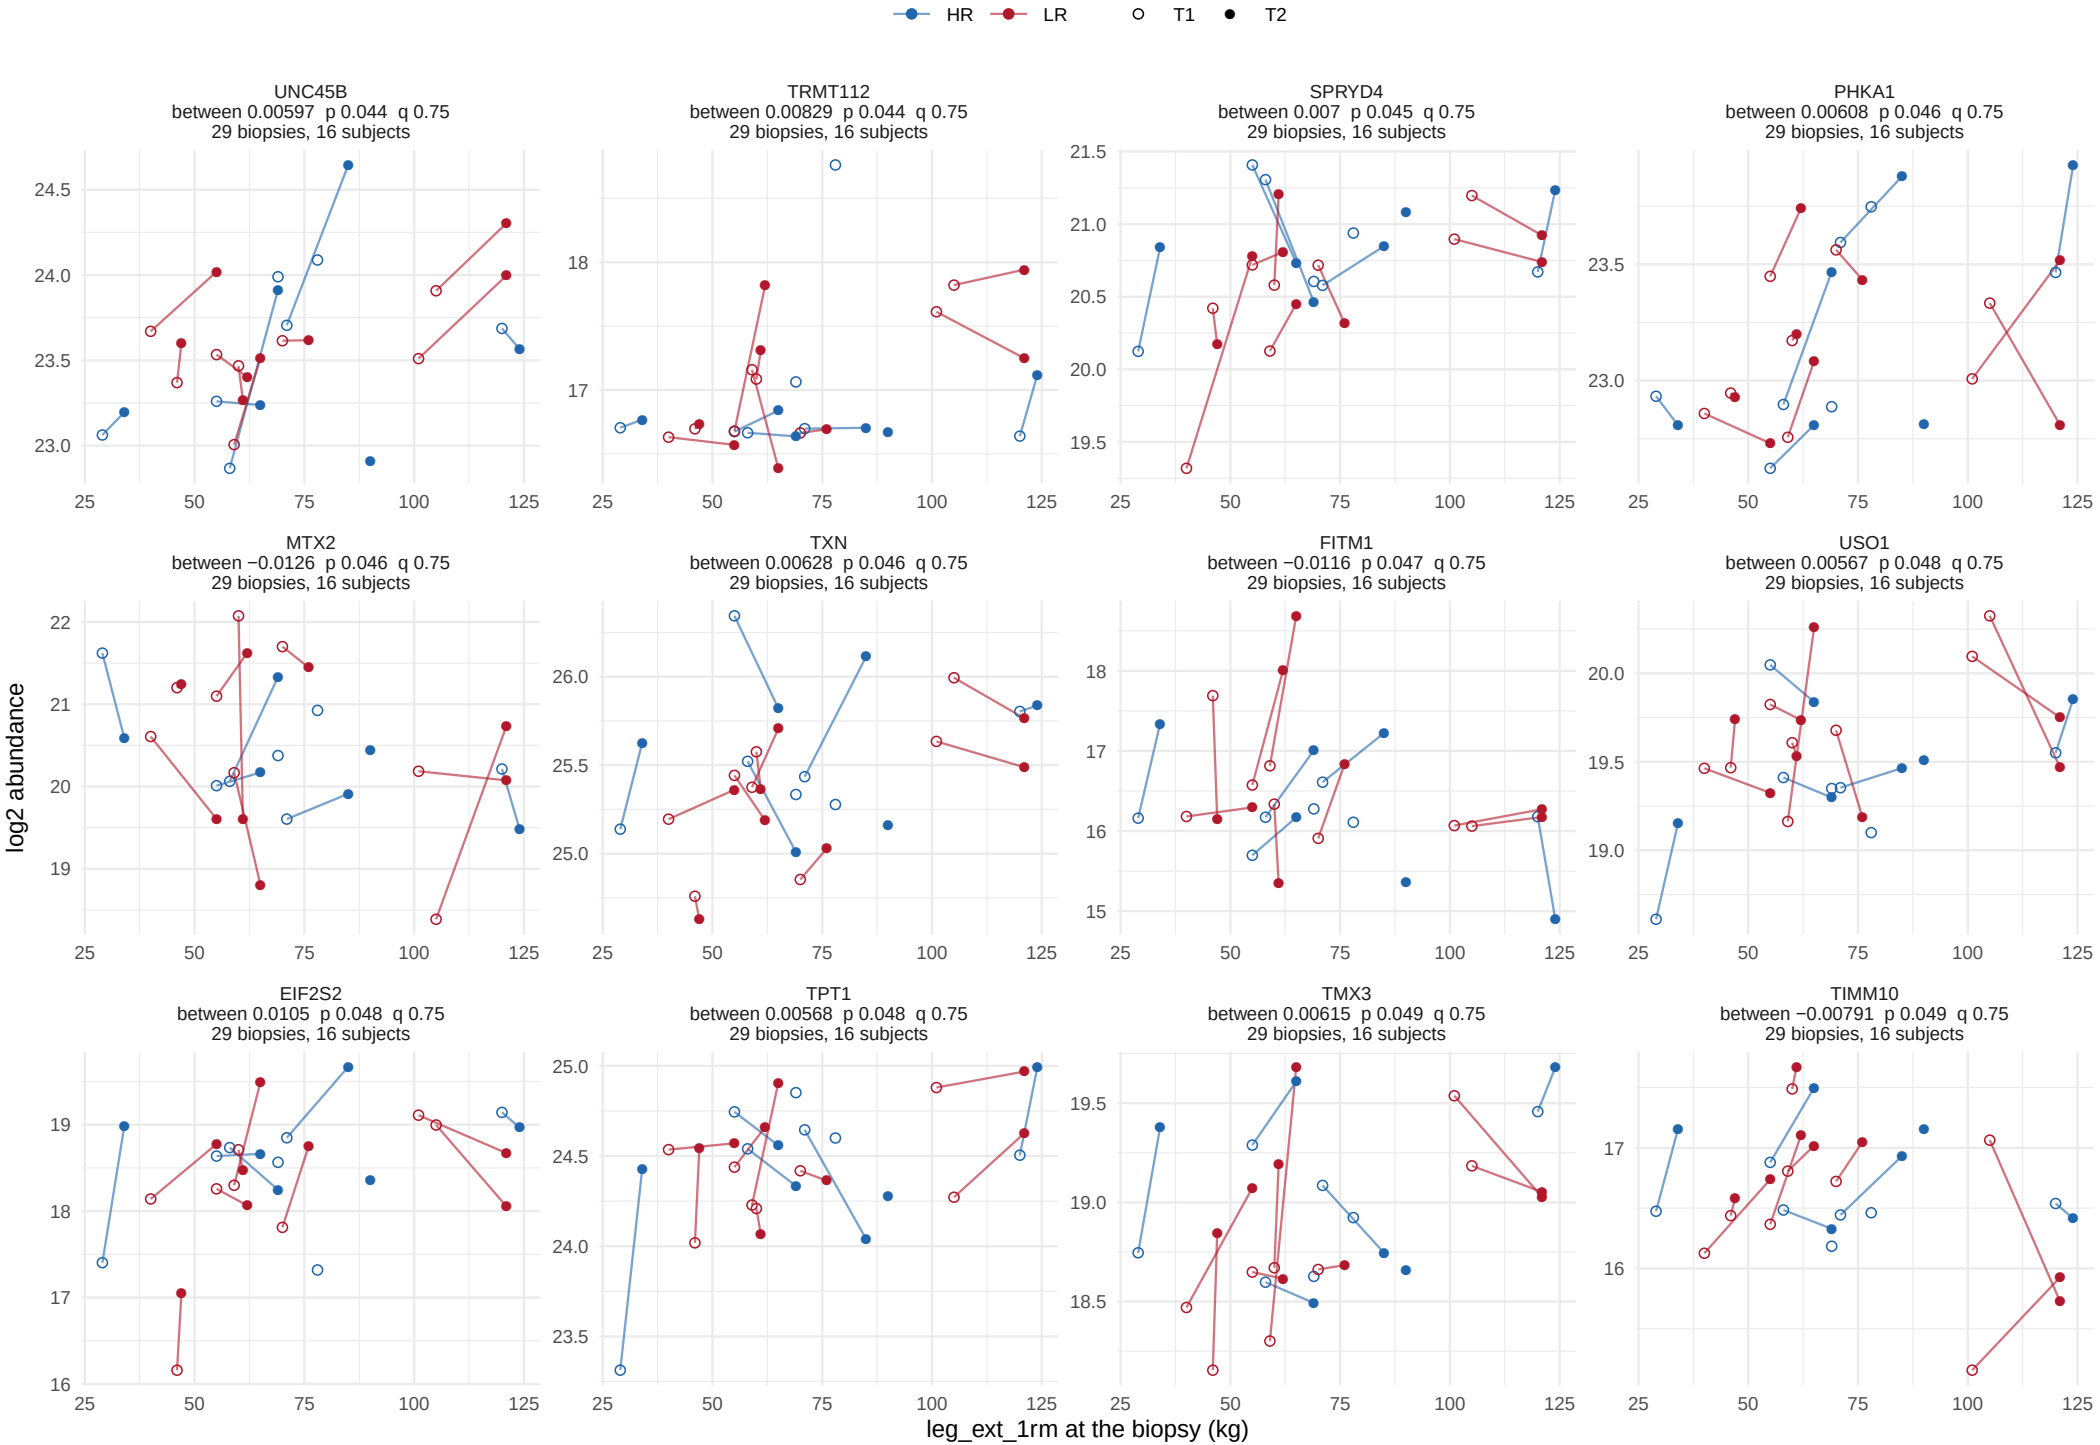

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_ext_1rm, between−person term

121 of 1900 proteins at p < 0.05, 0 at BH < 0.05. Page 11 of 11.

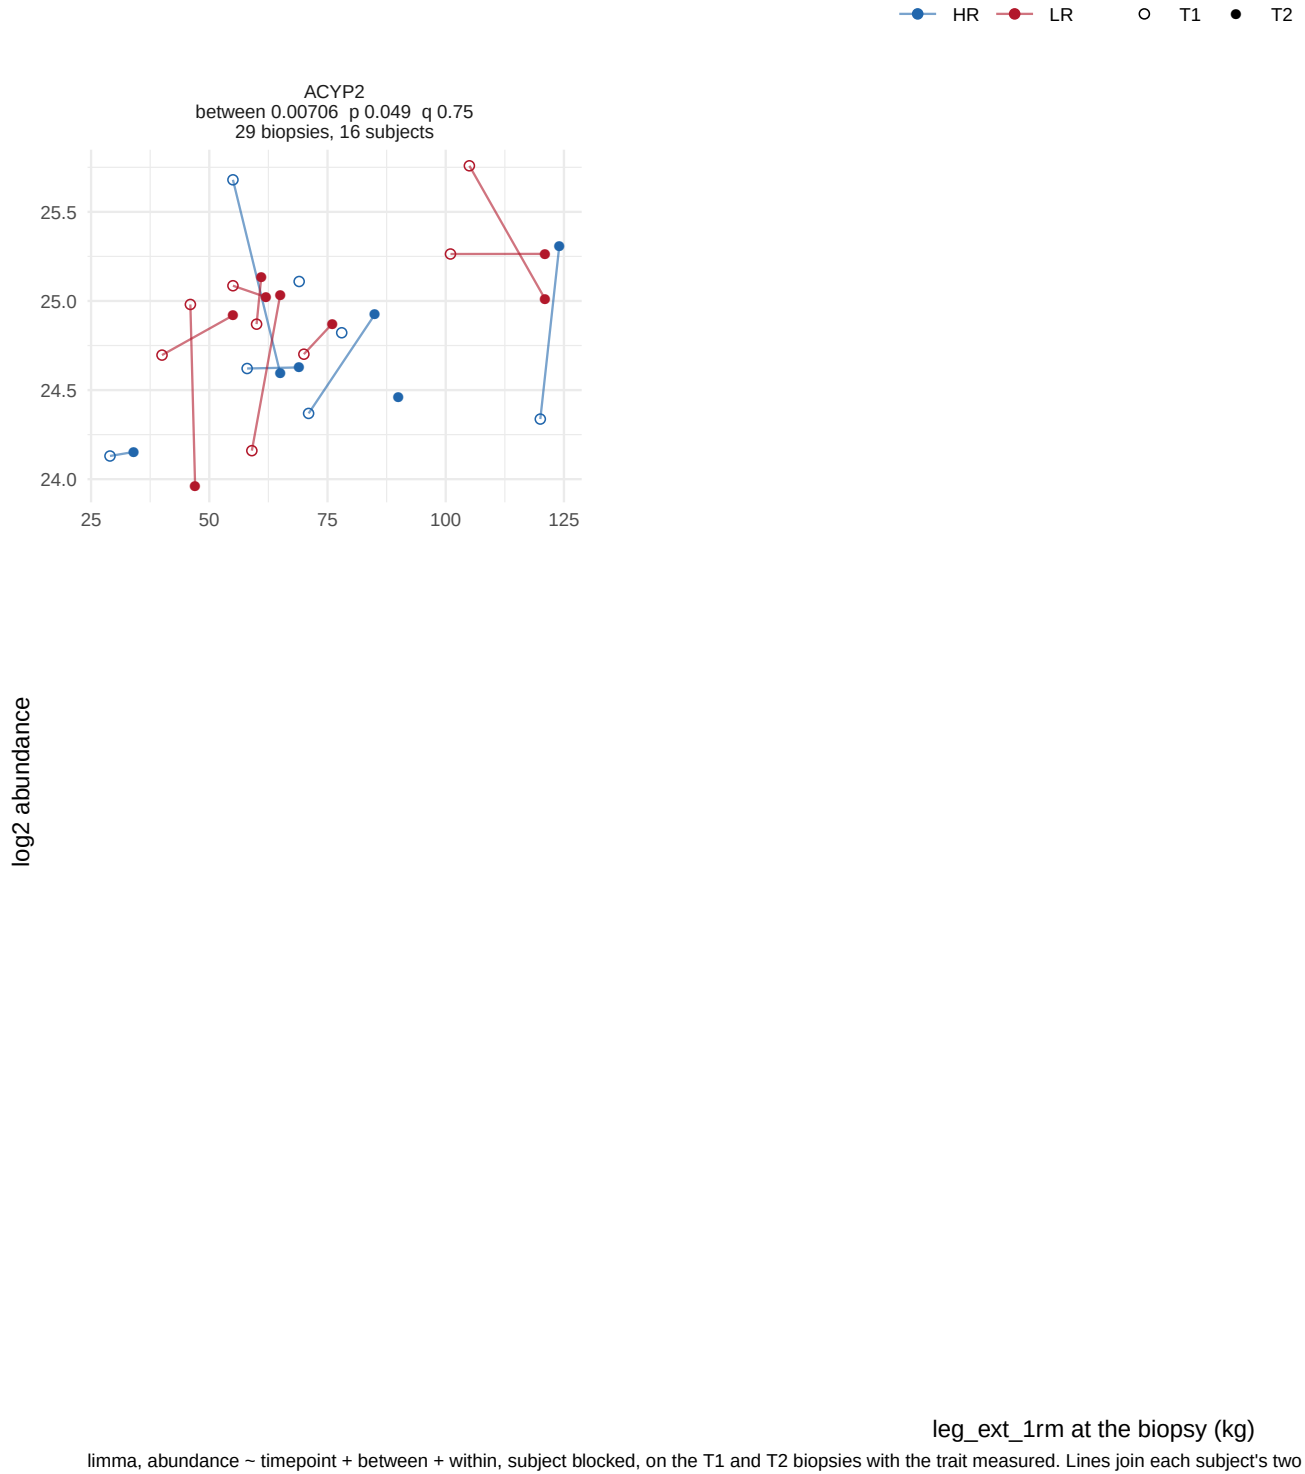

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

Change score, training window


628 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 1 of 53.



One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


628 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 2 of 53.

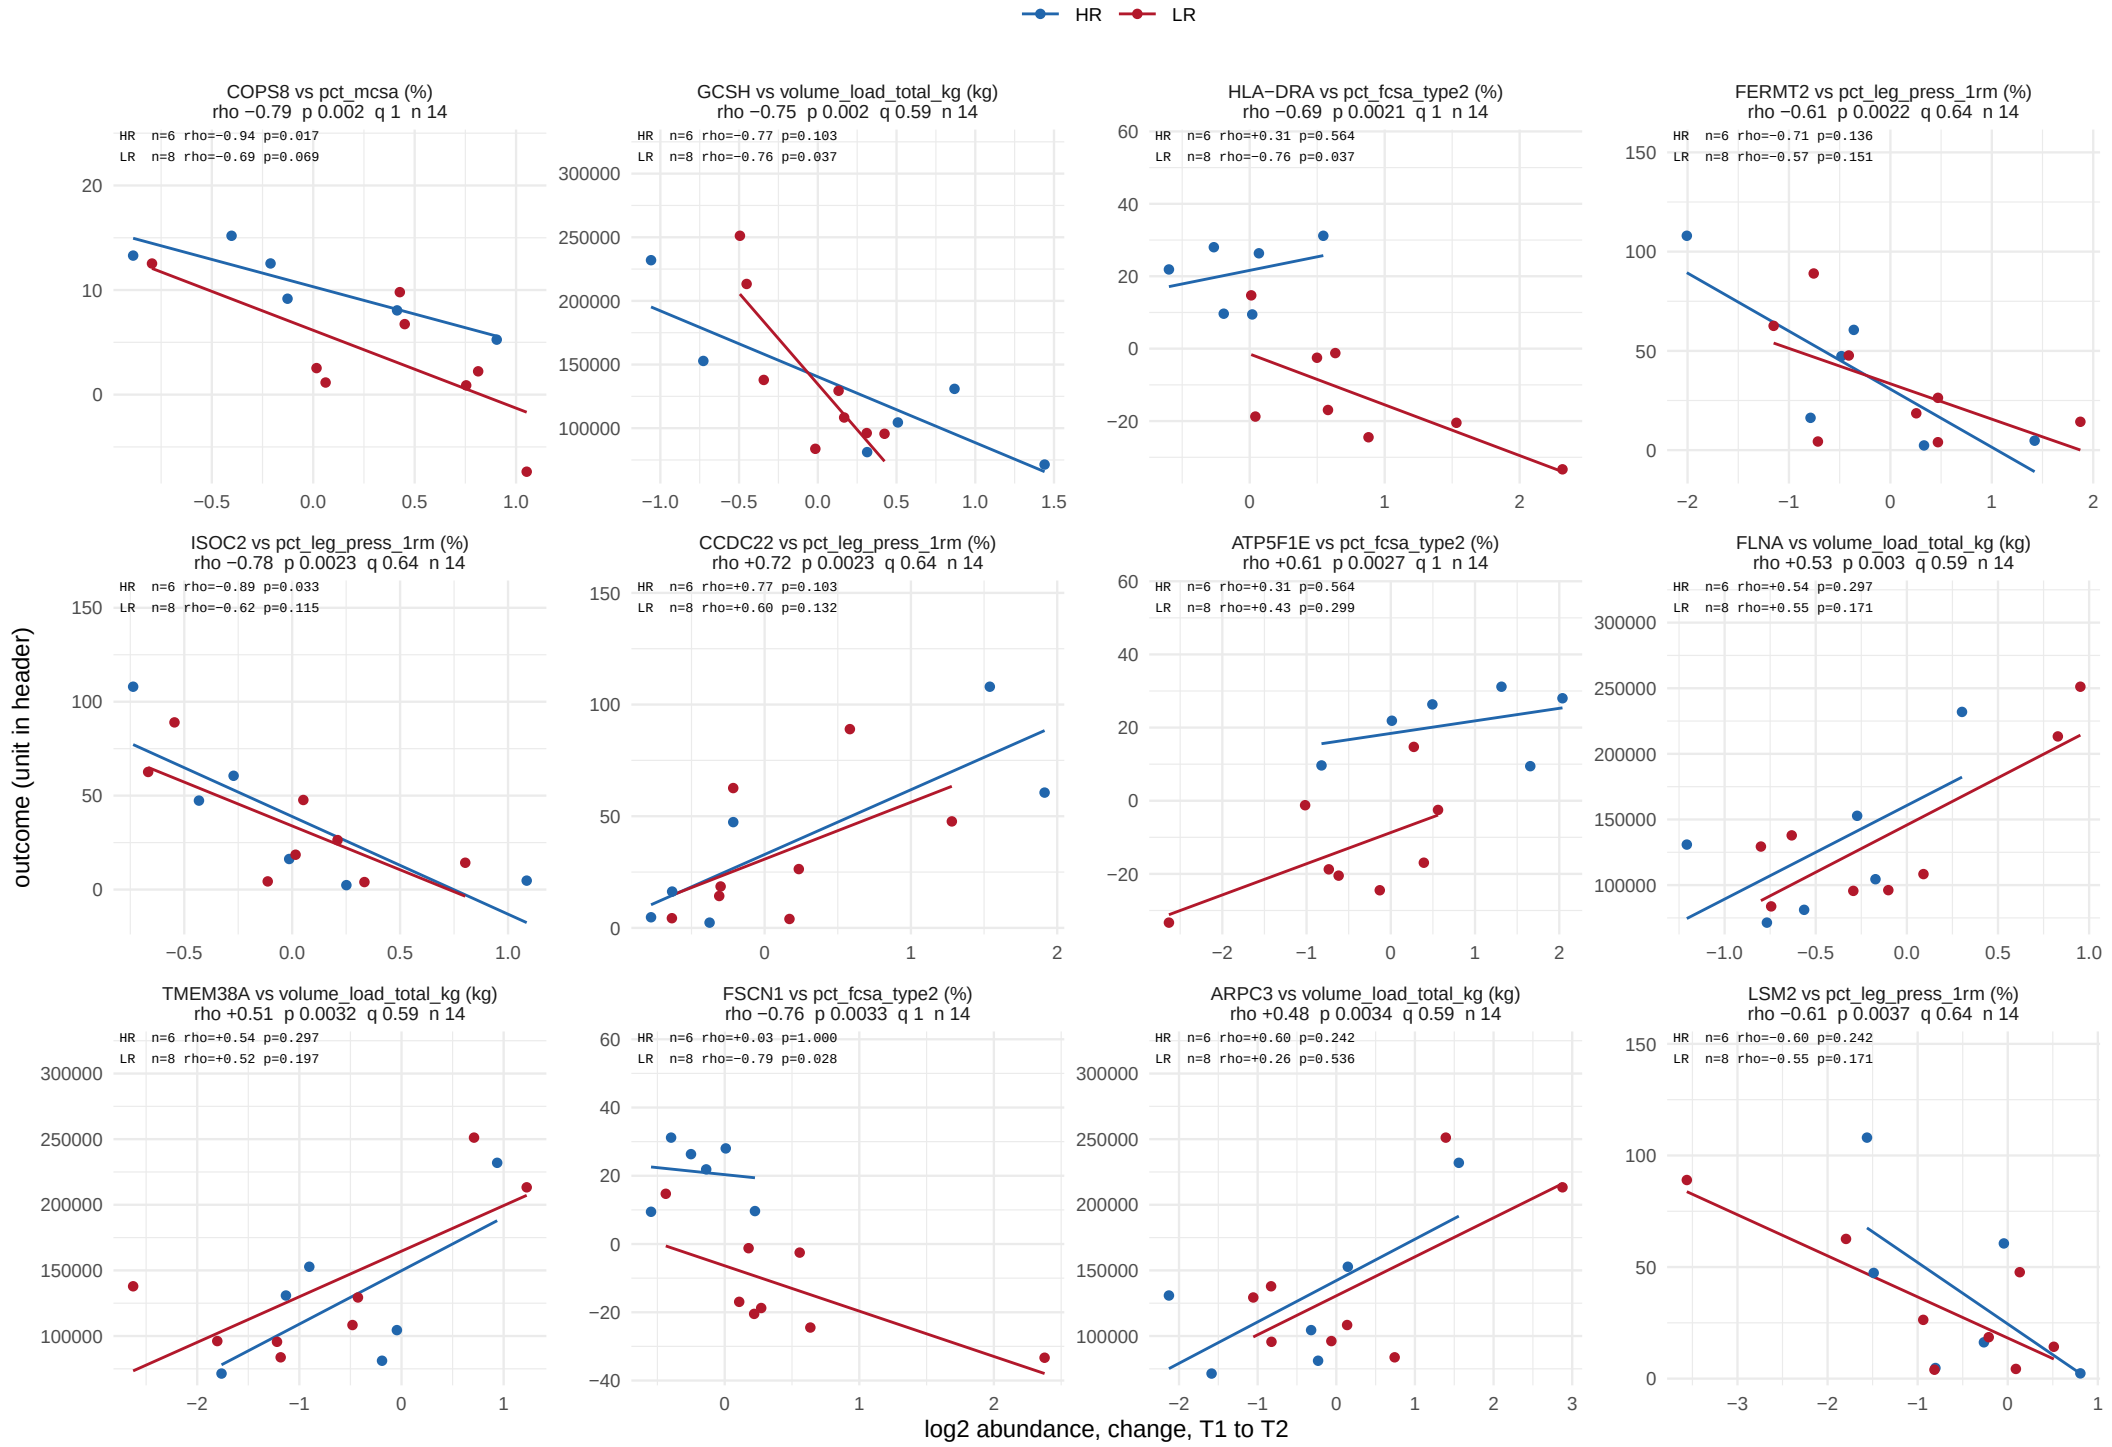

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


628 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 3 of 53.

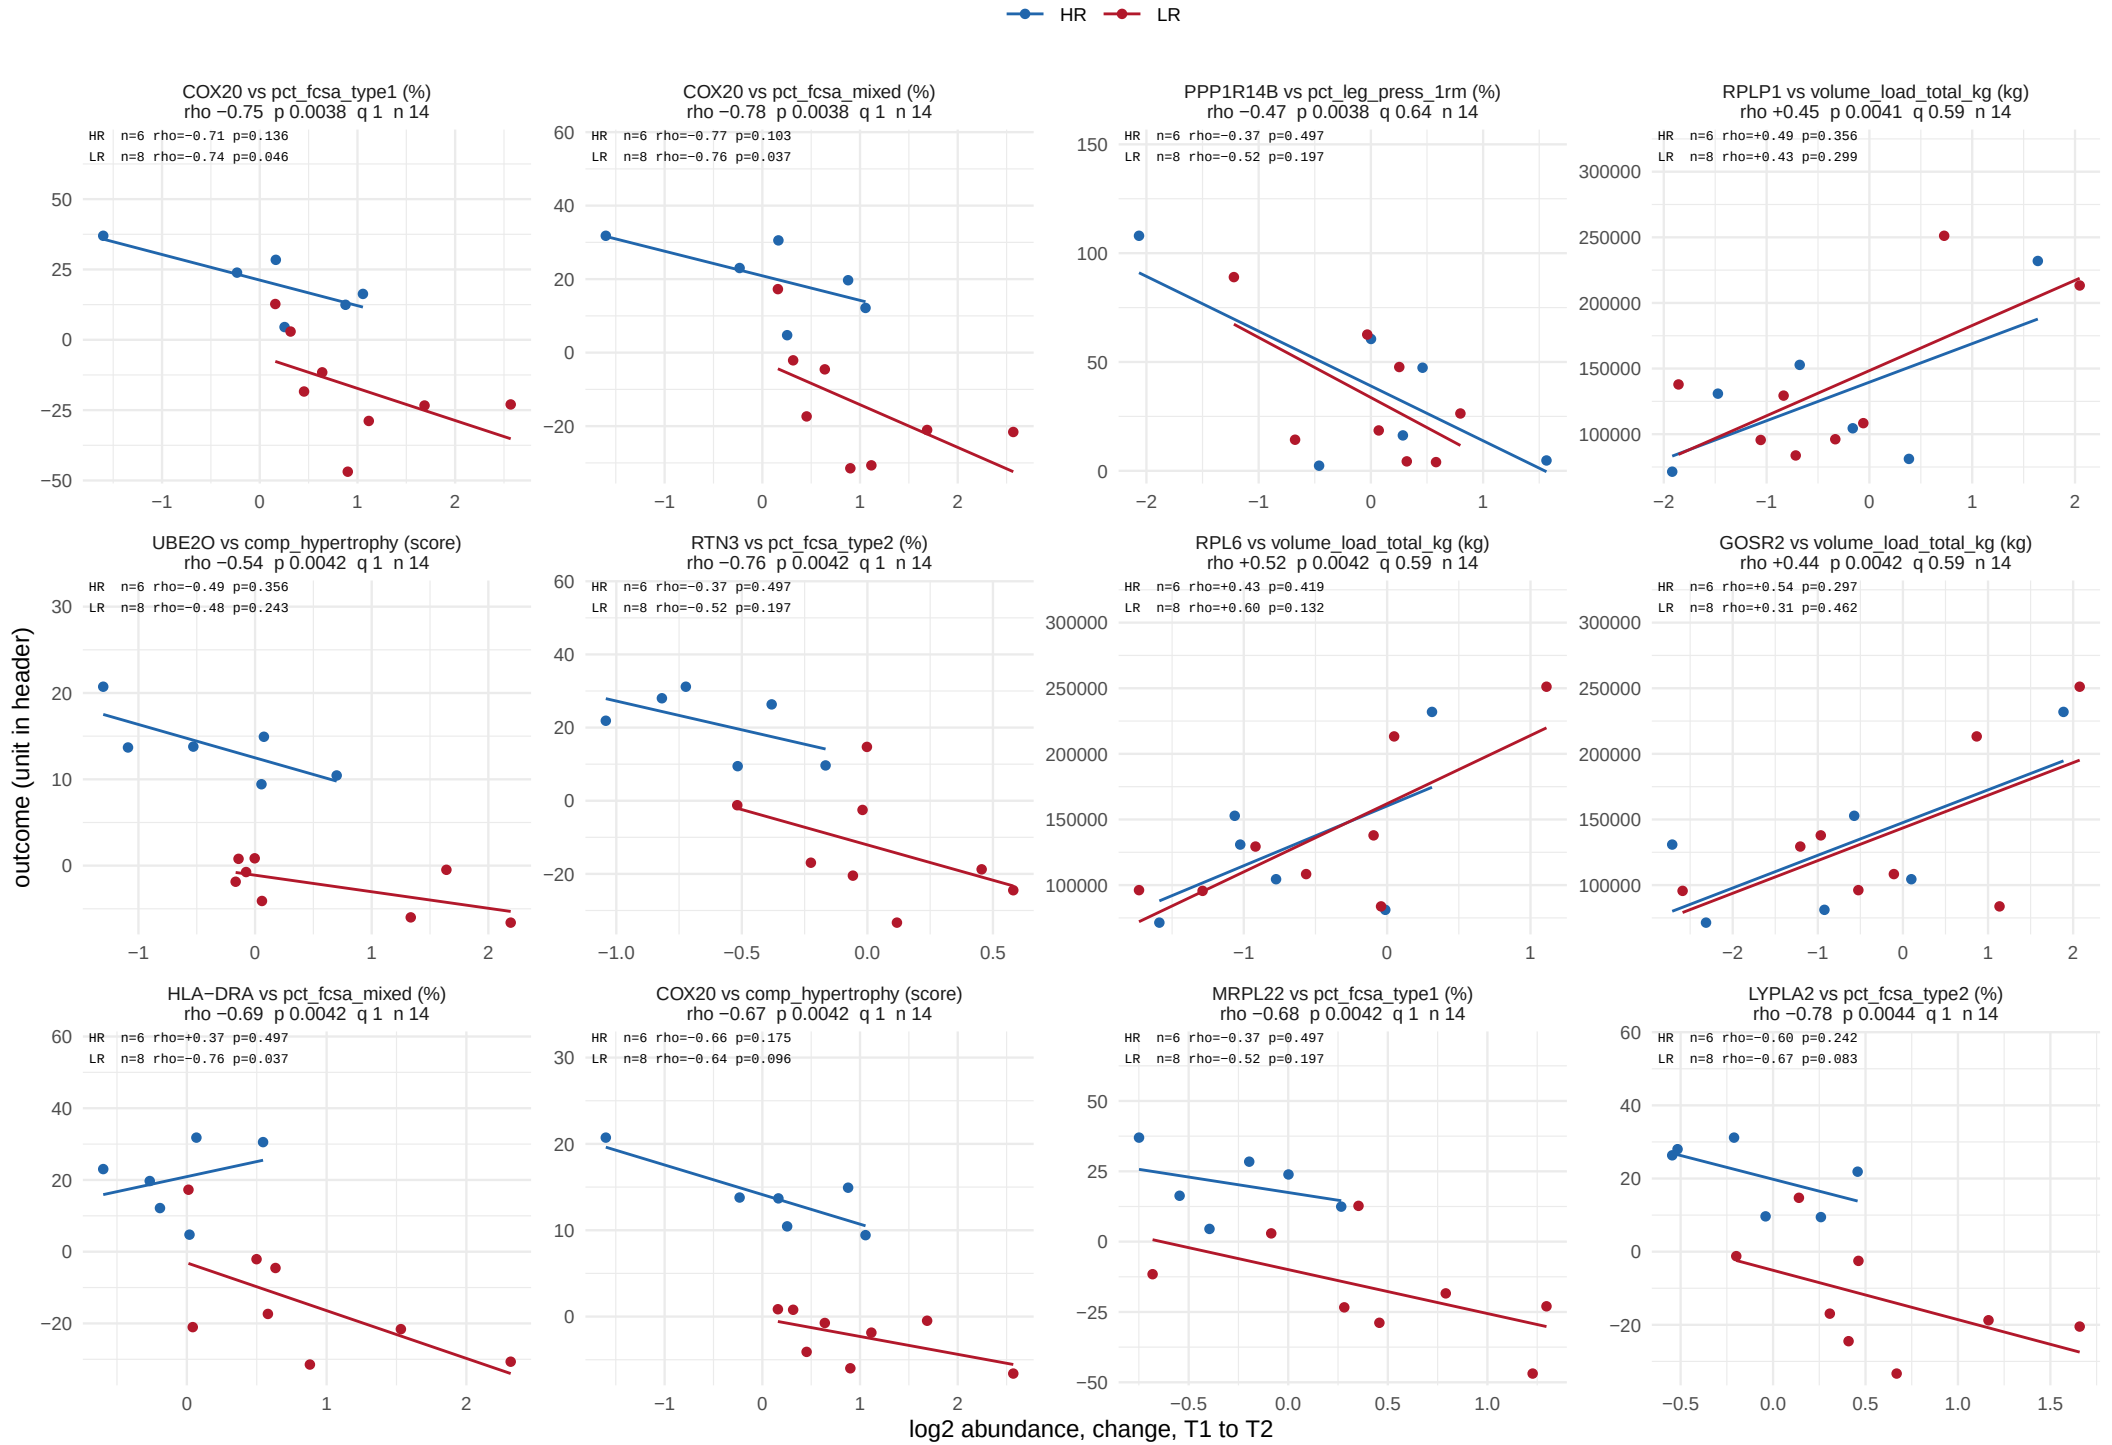

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


628 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 4 of 53.

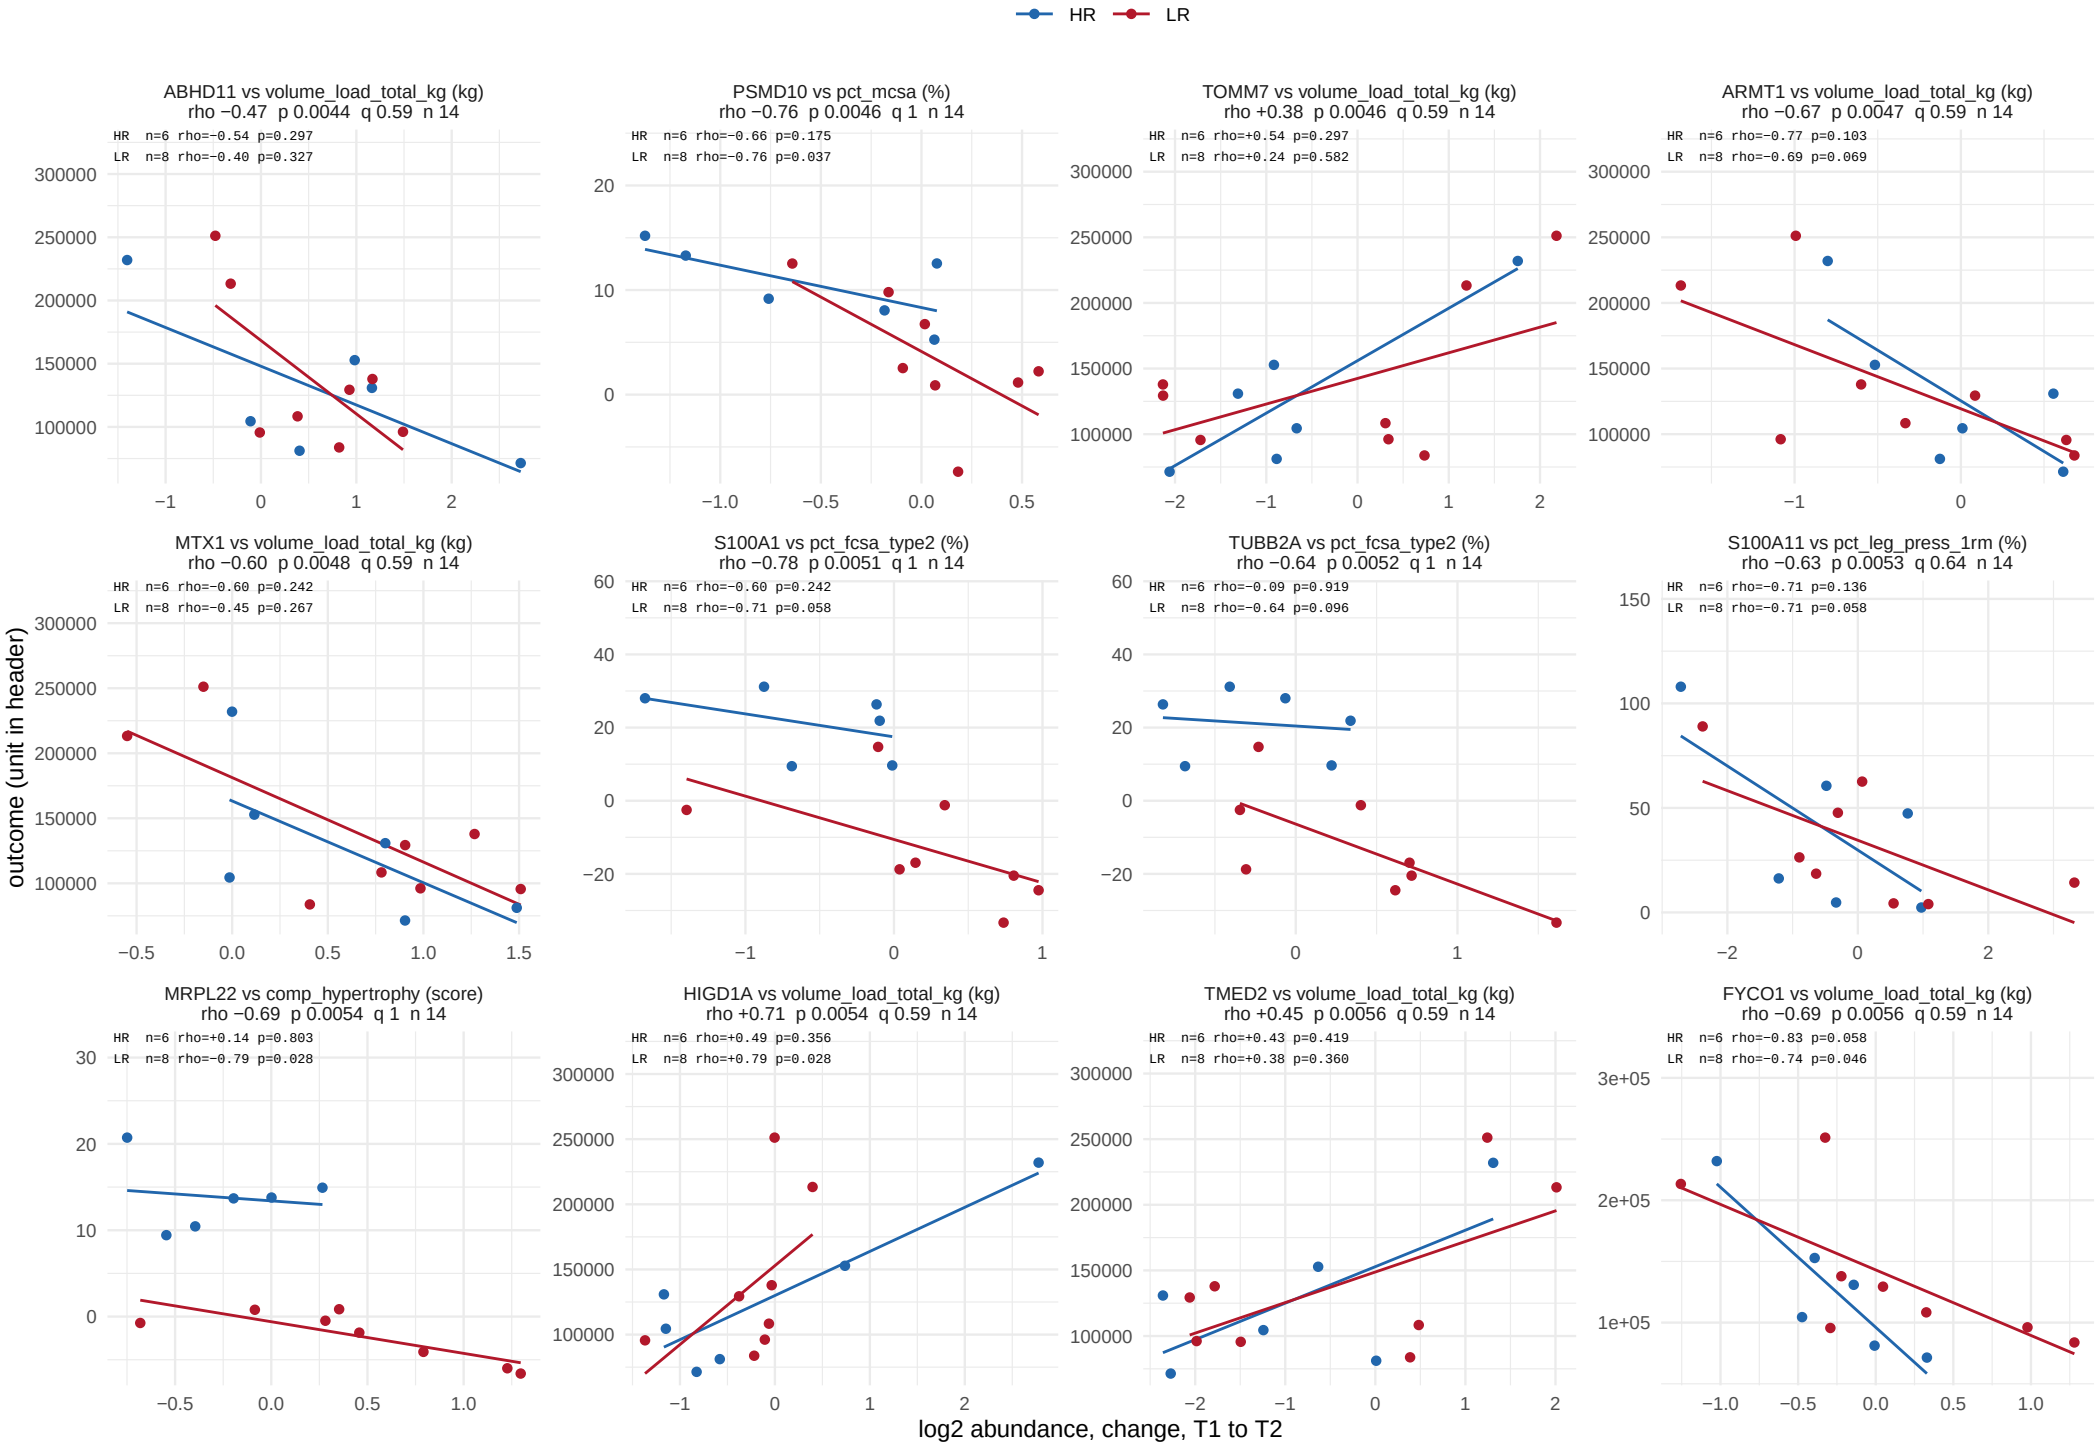

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


628 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 5 of 53.

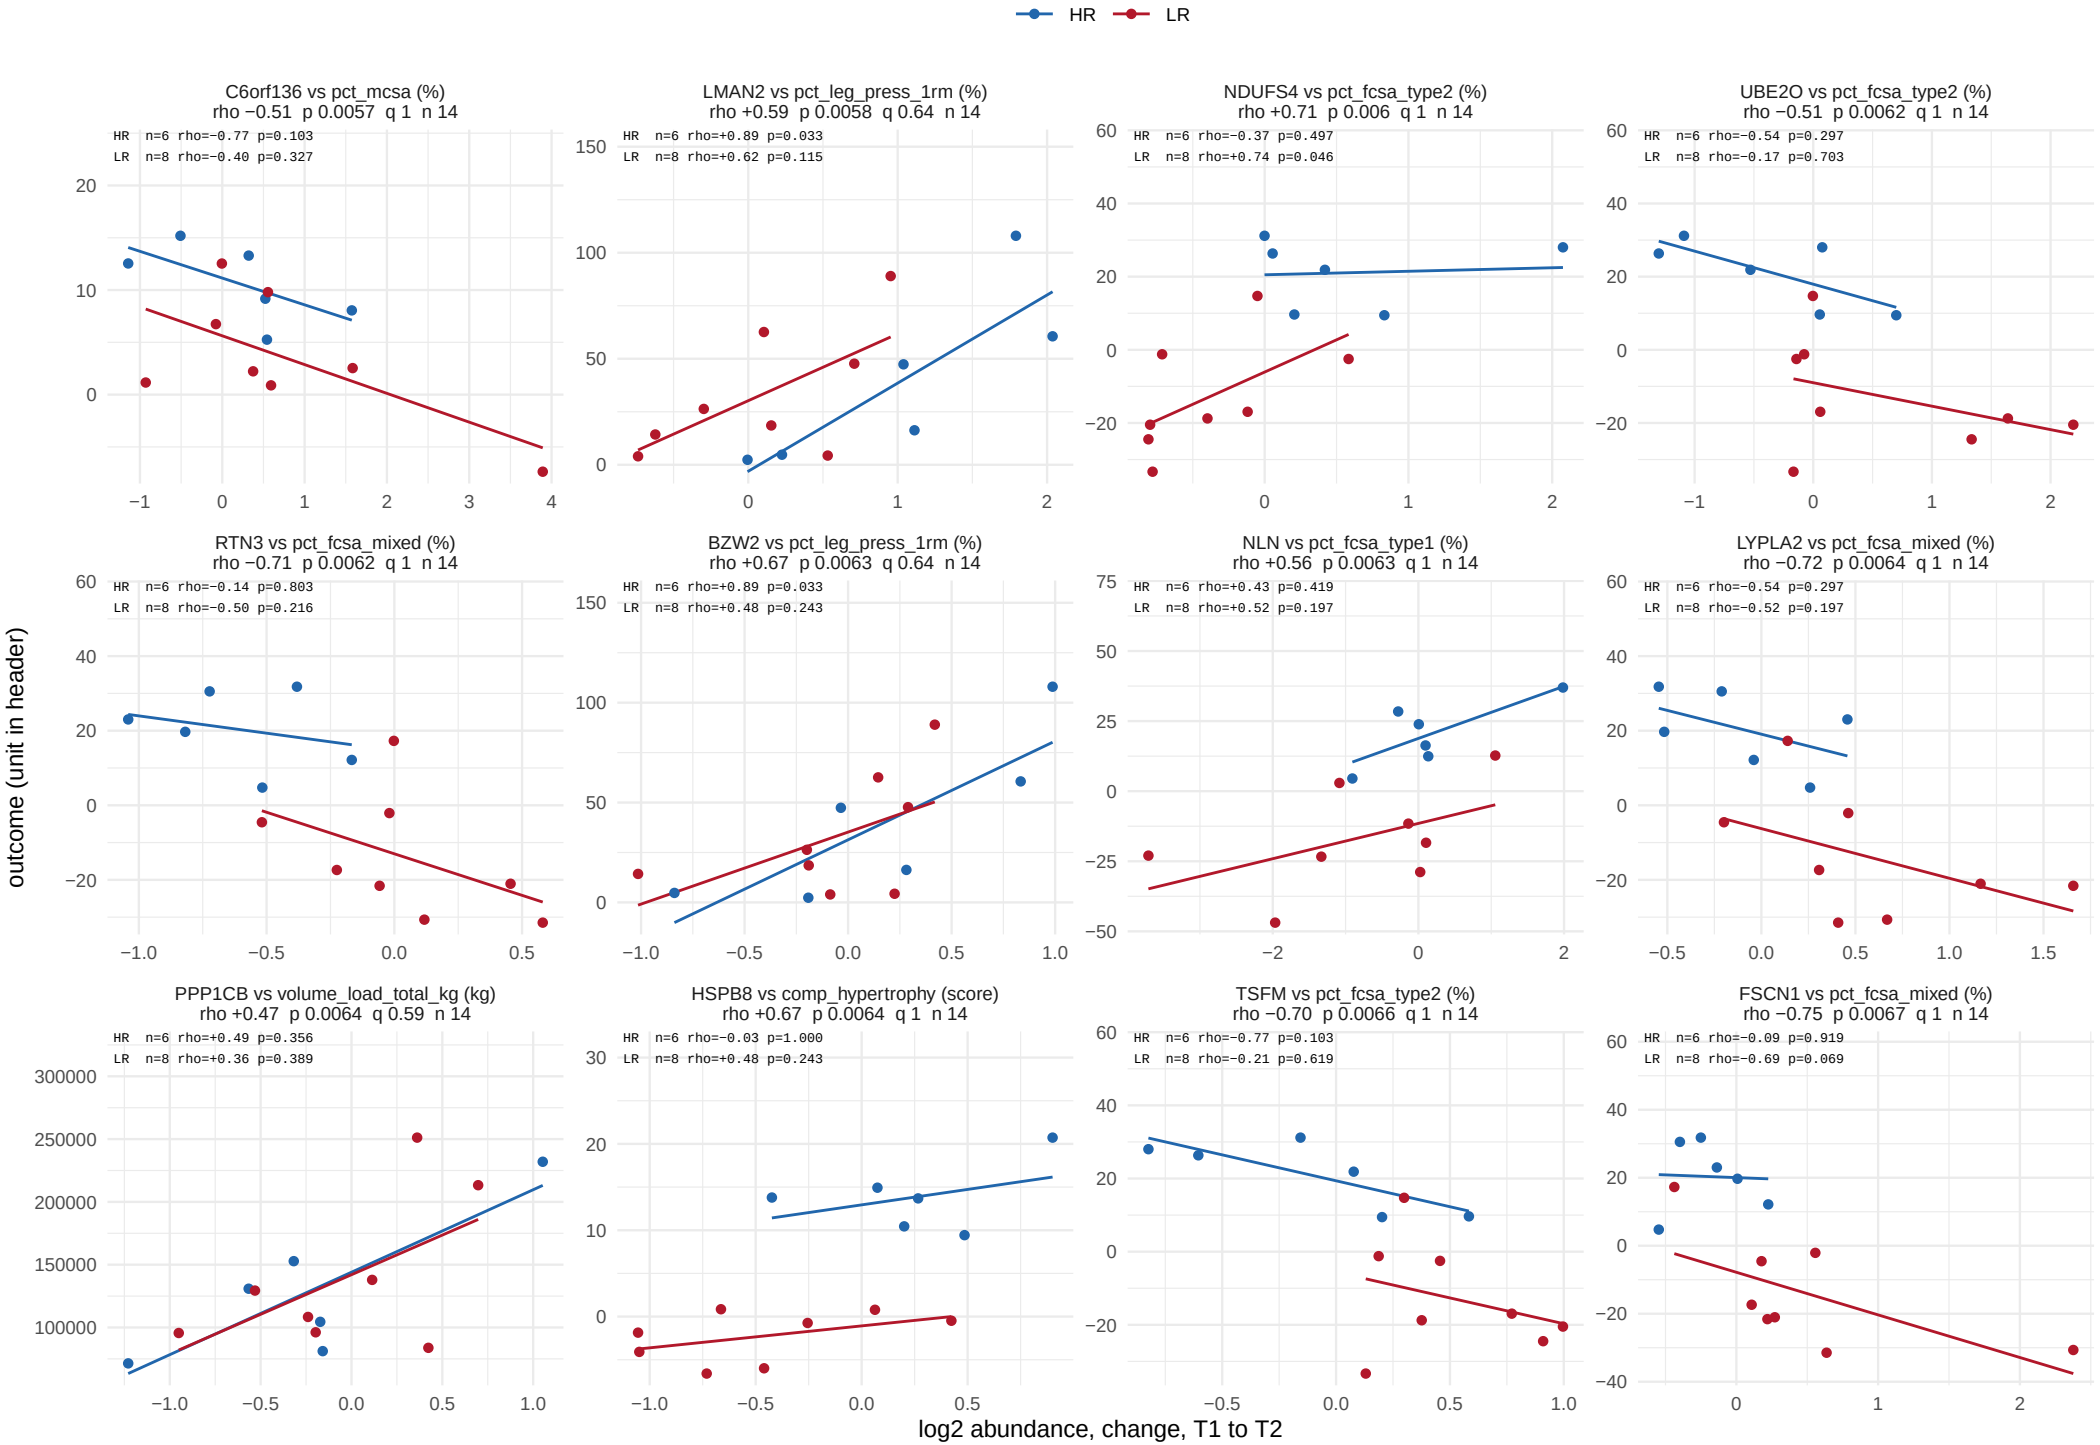

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


628 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 6 of 53.

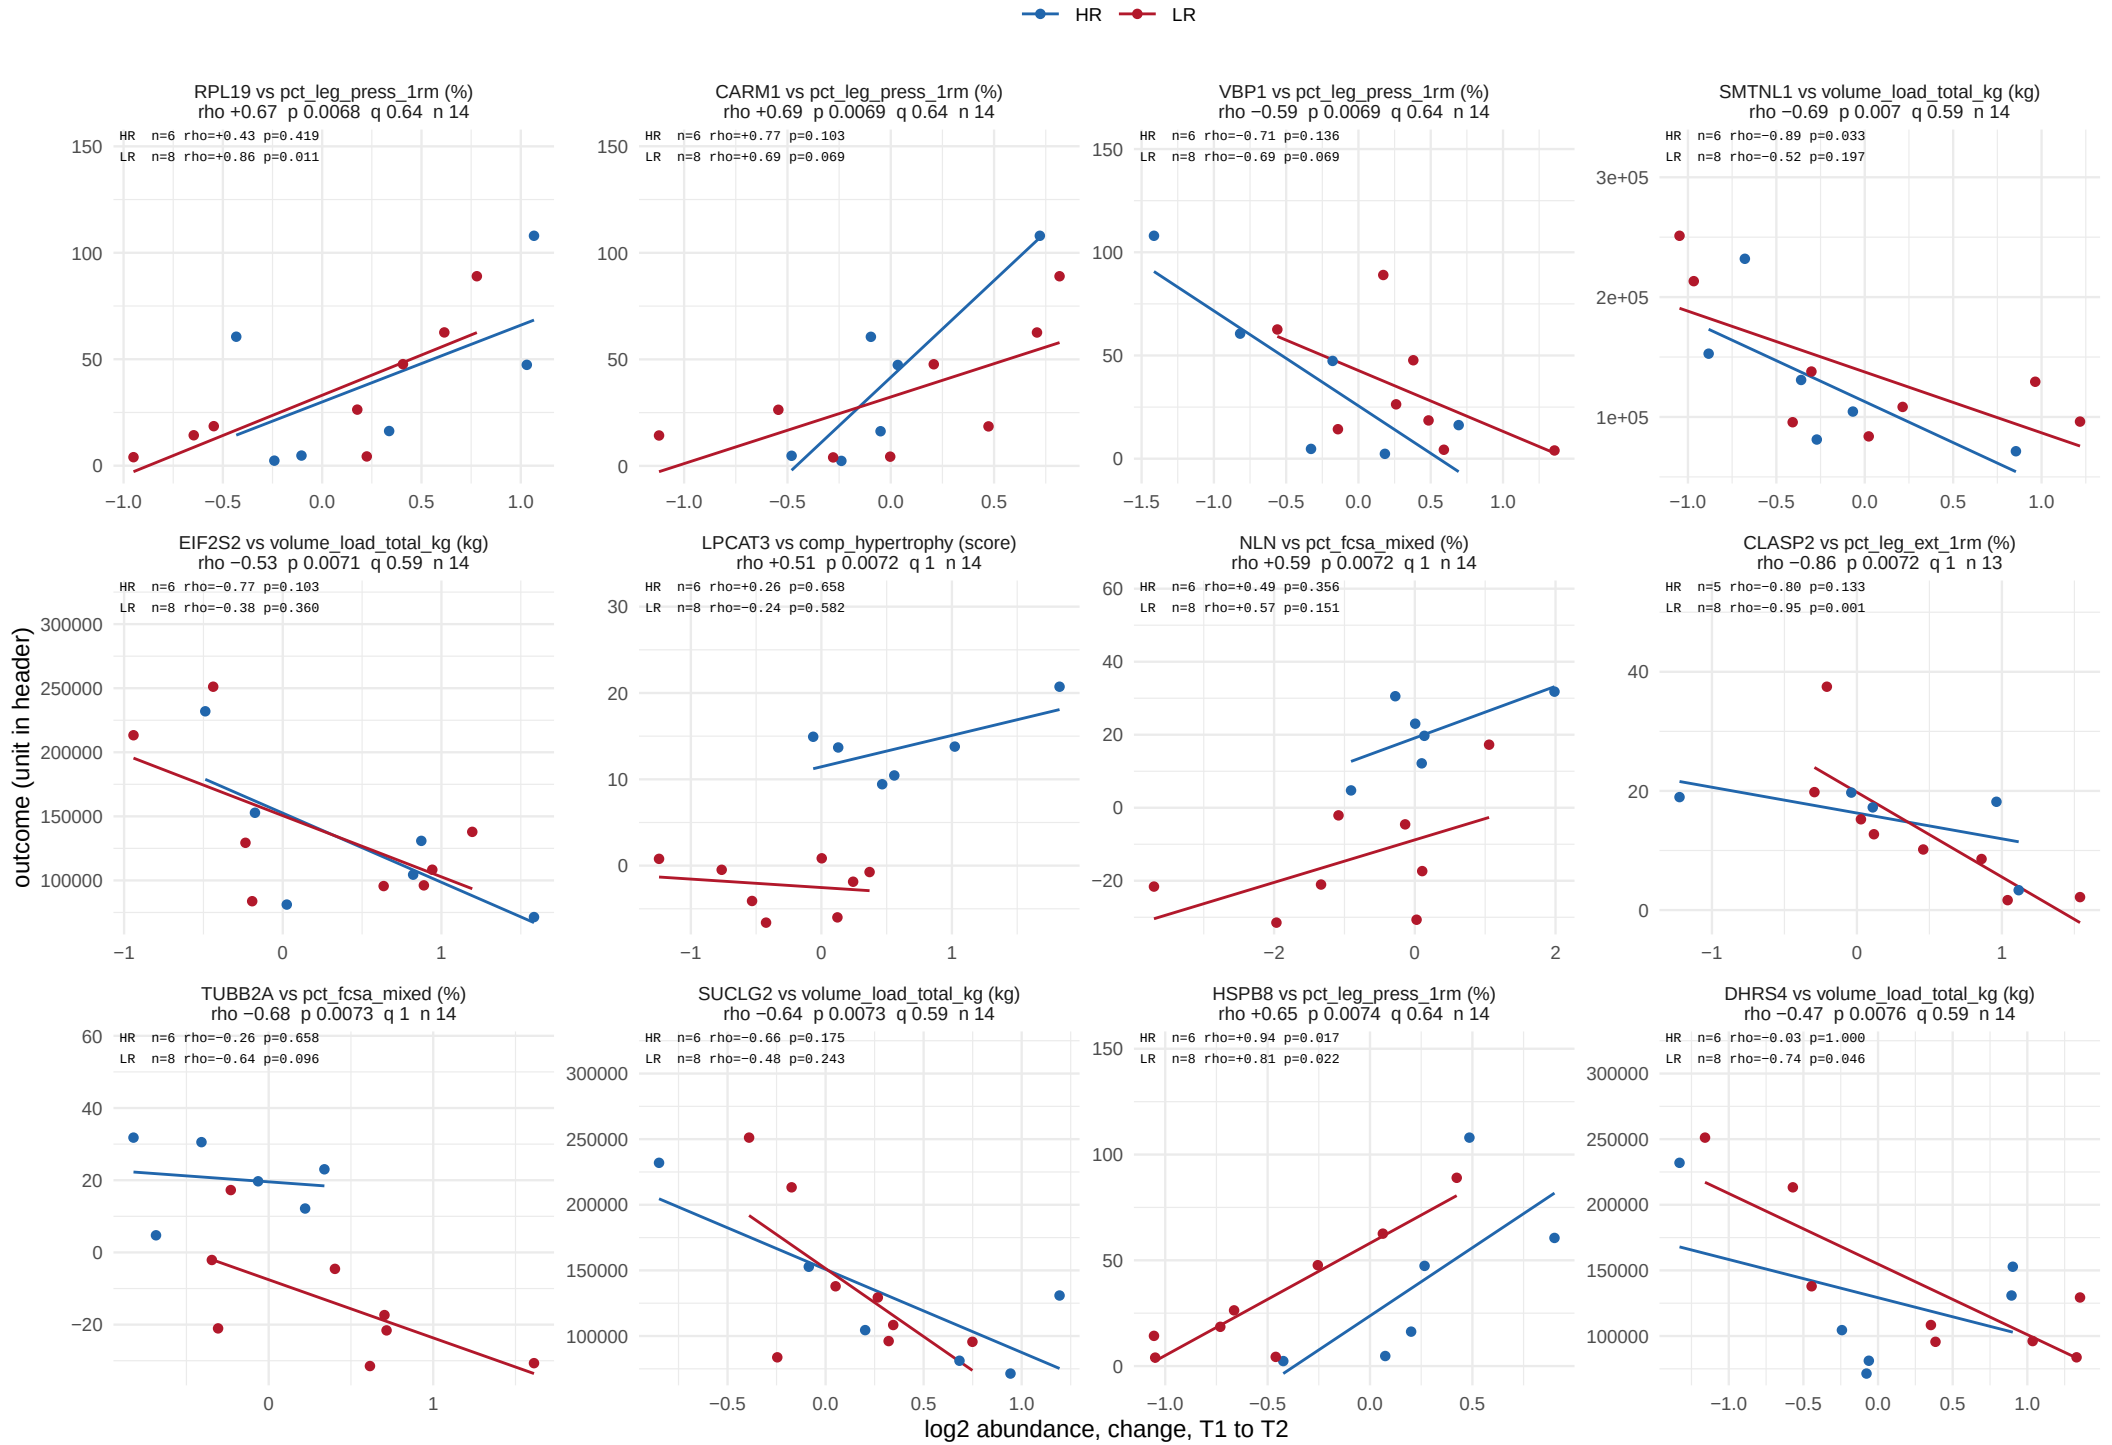

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


628 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 7 of 53.

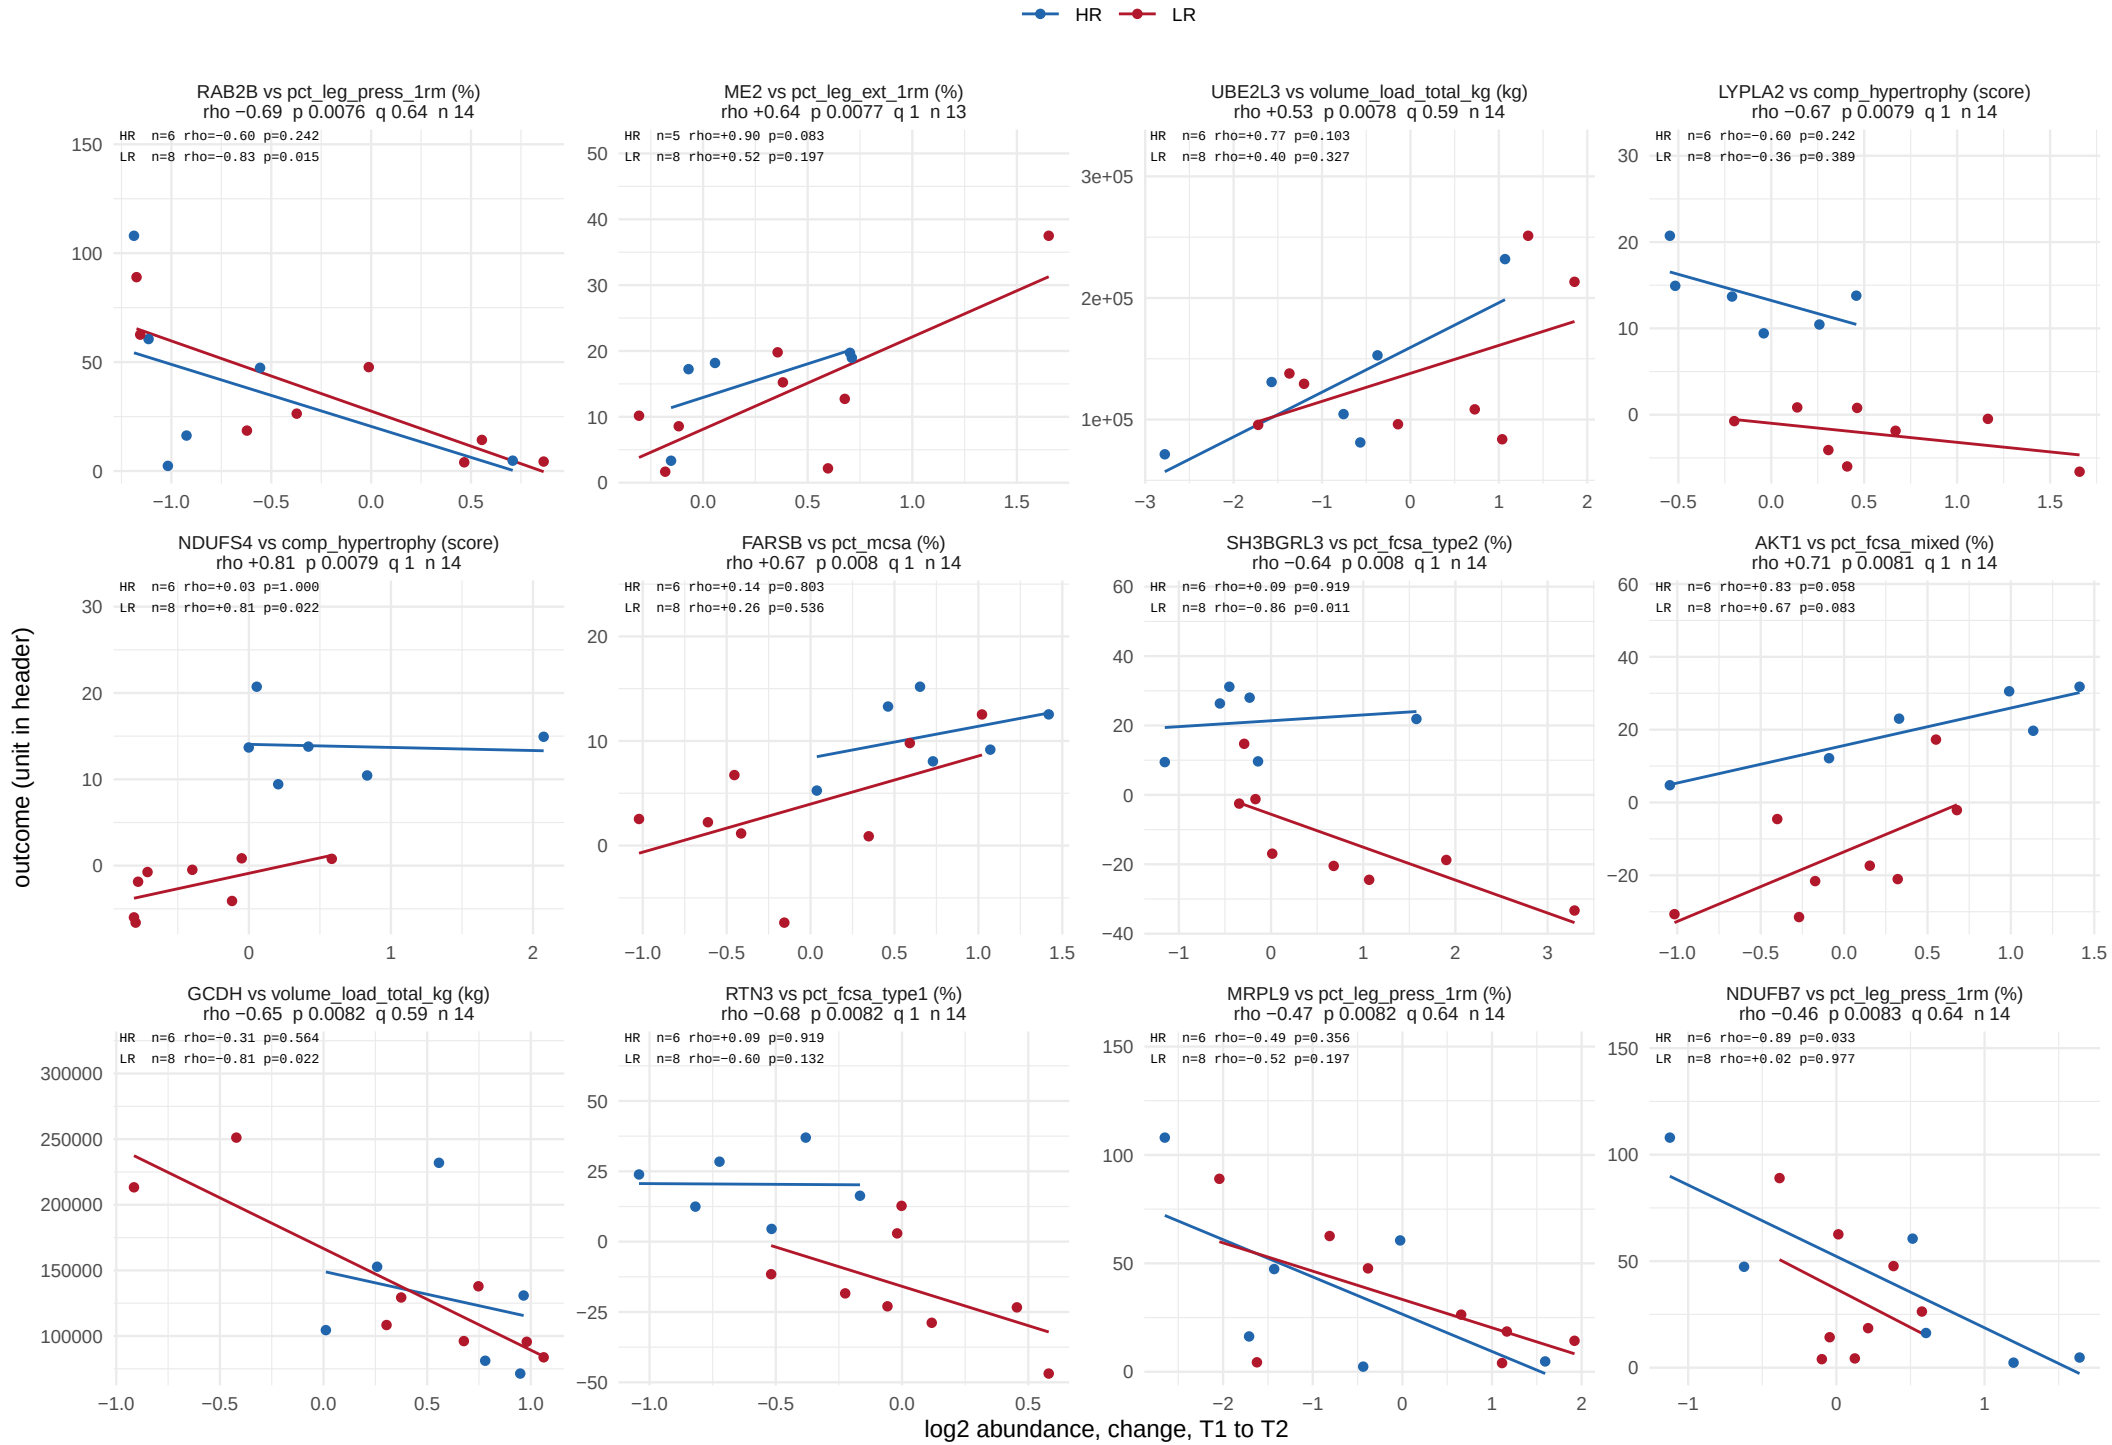

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


628 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 8 of 53.

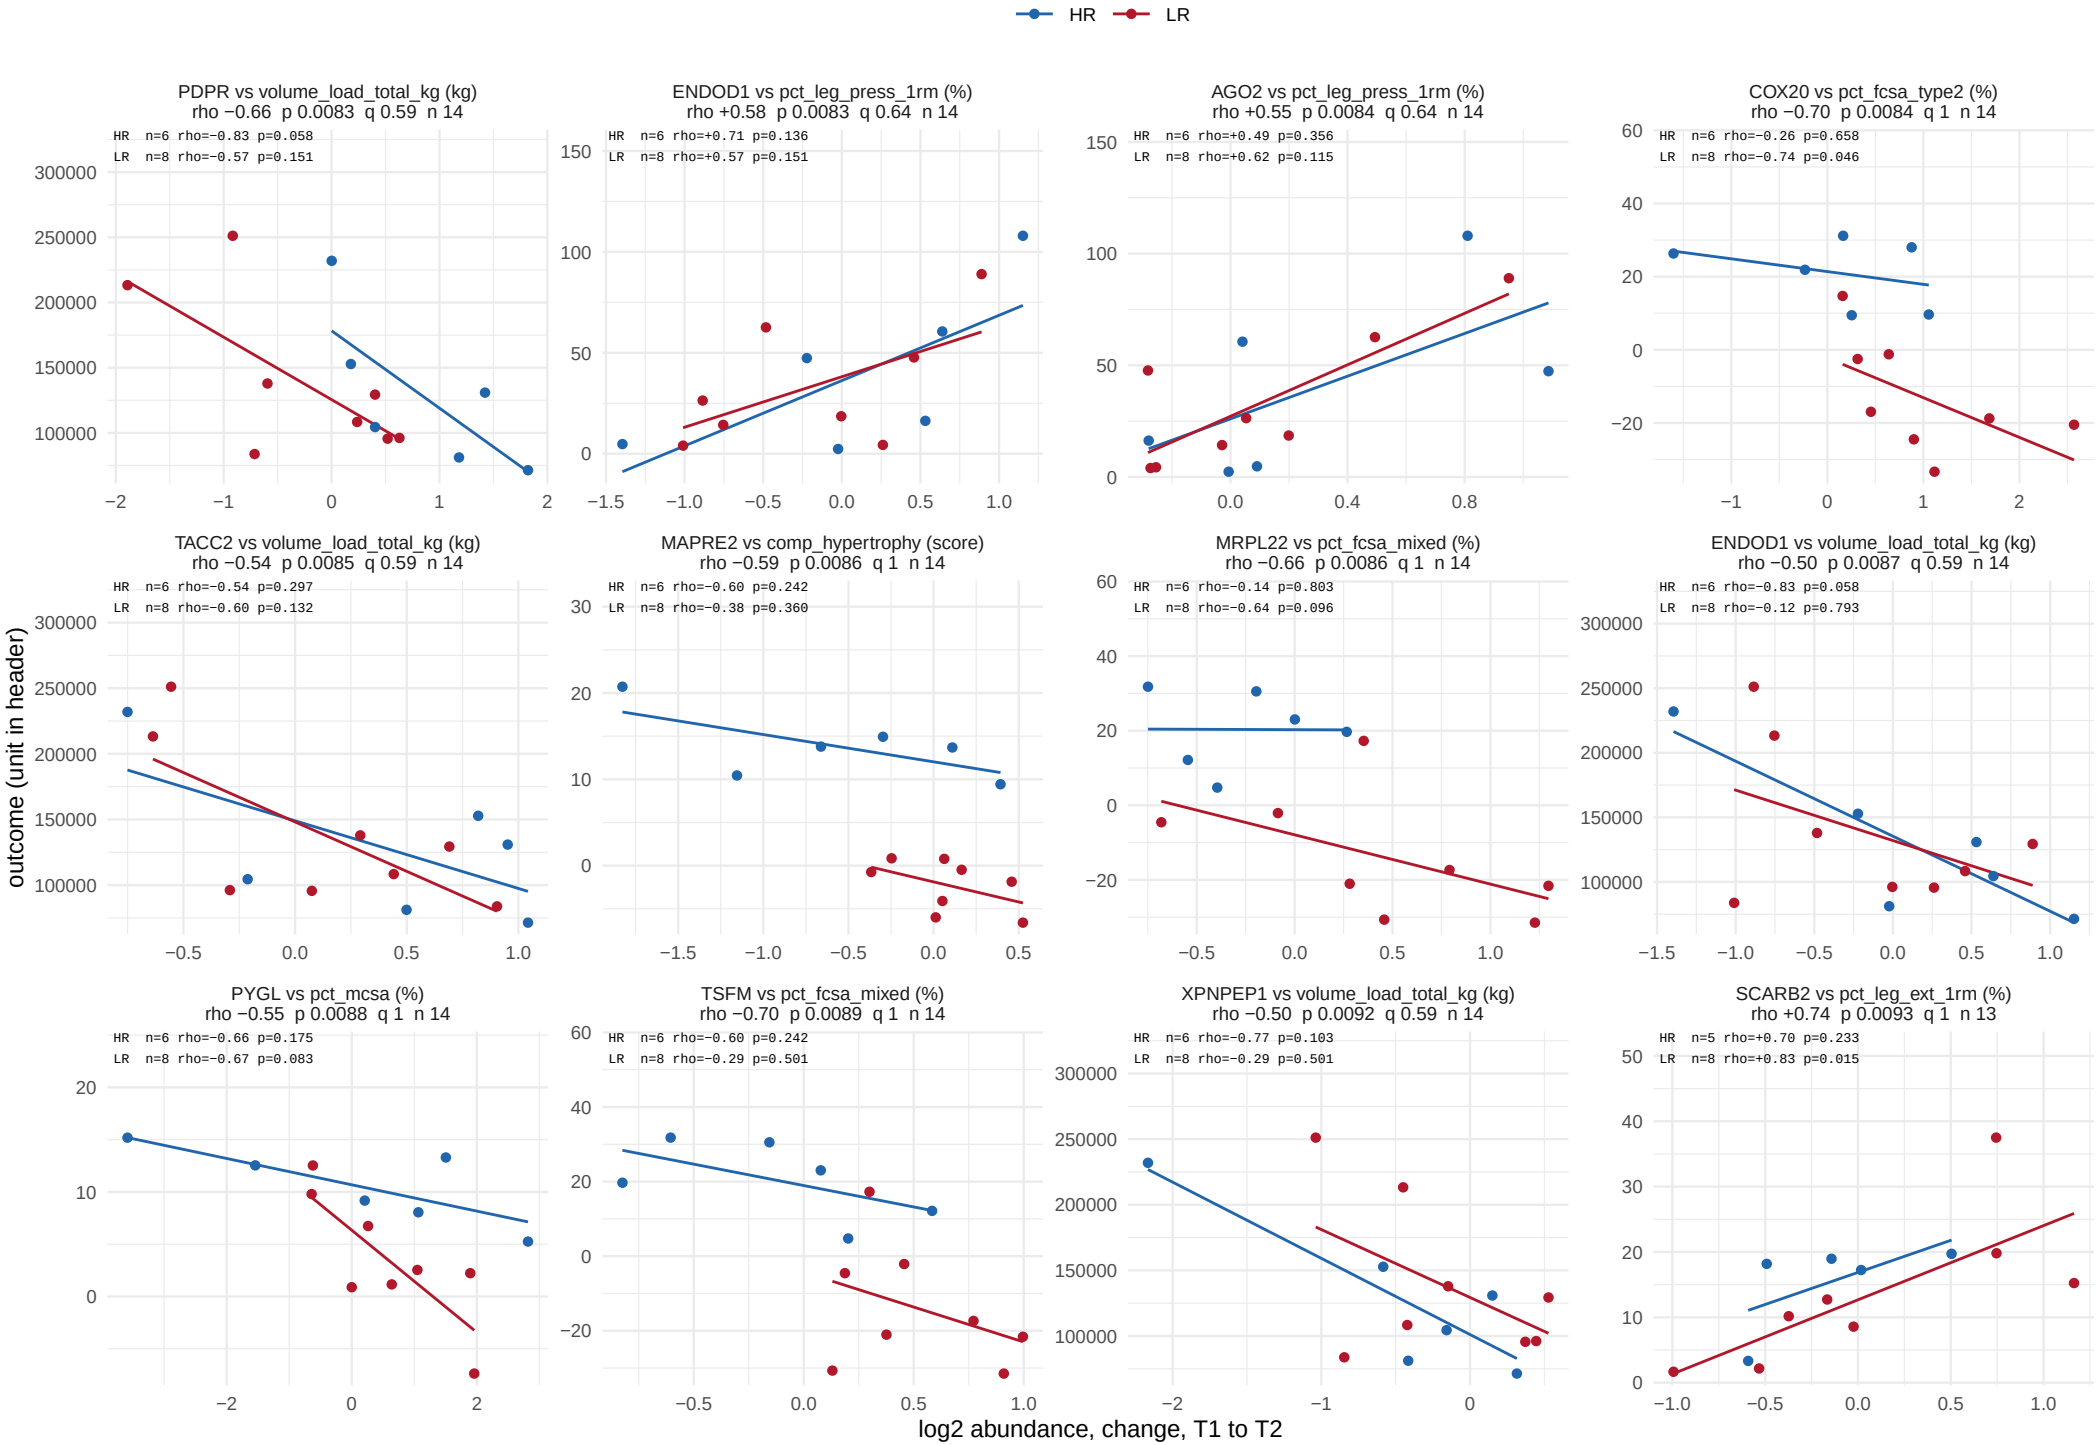

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


628 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 9 of 53.

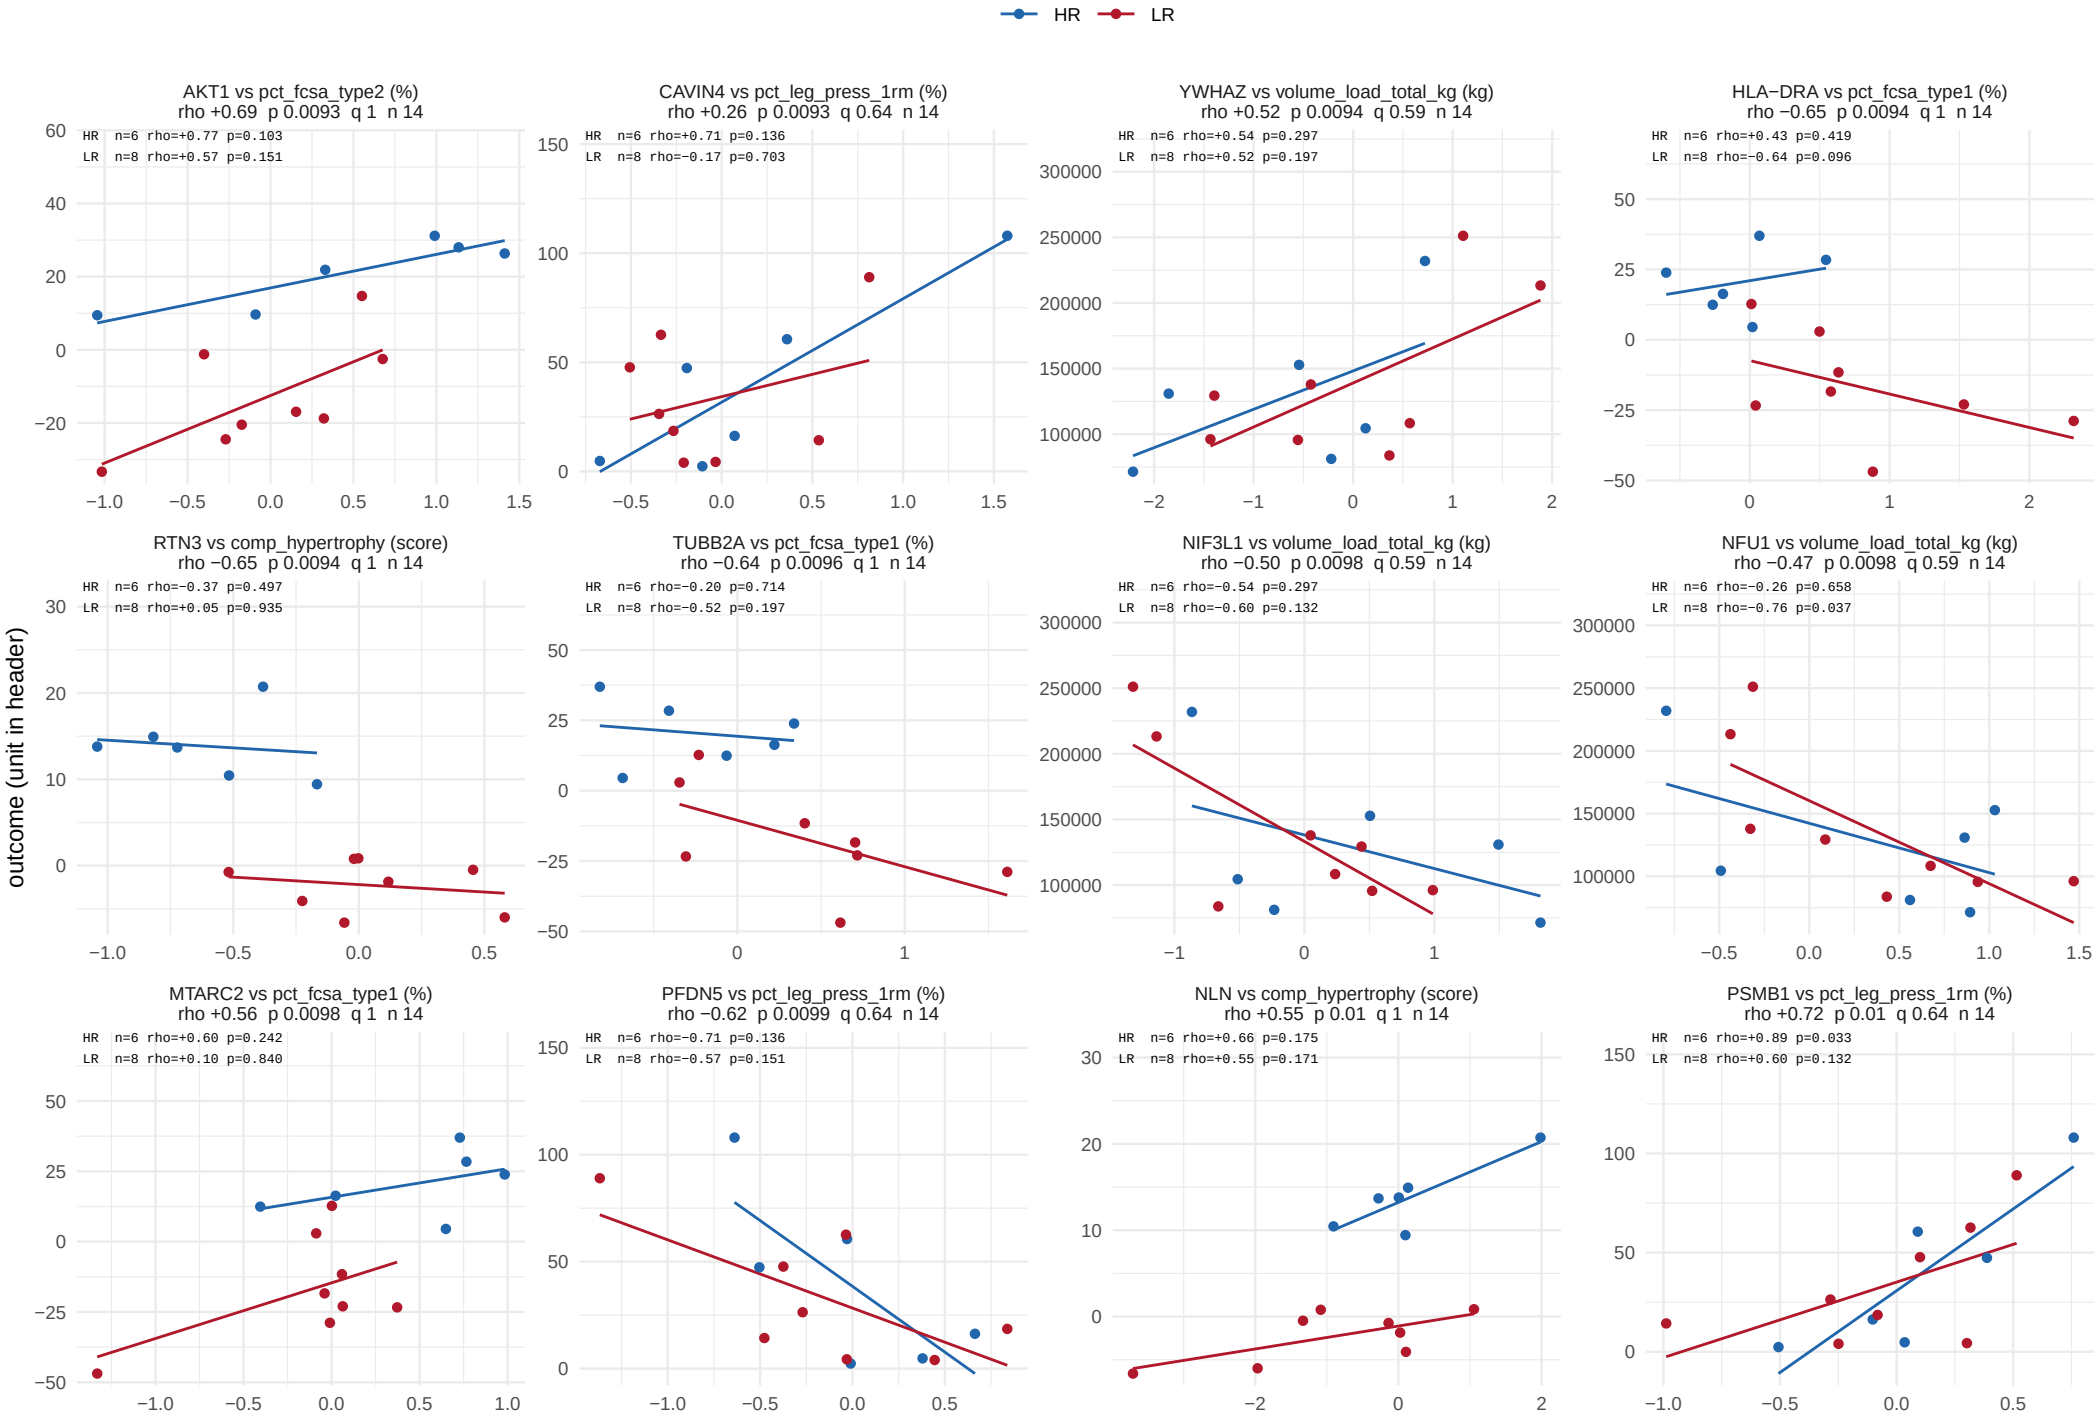

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


628 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 10 of 53.

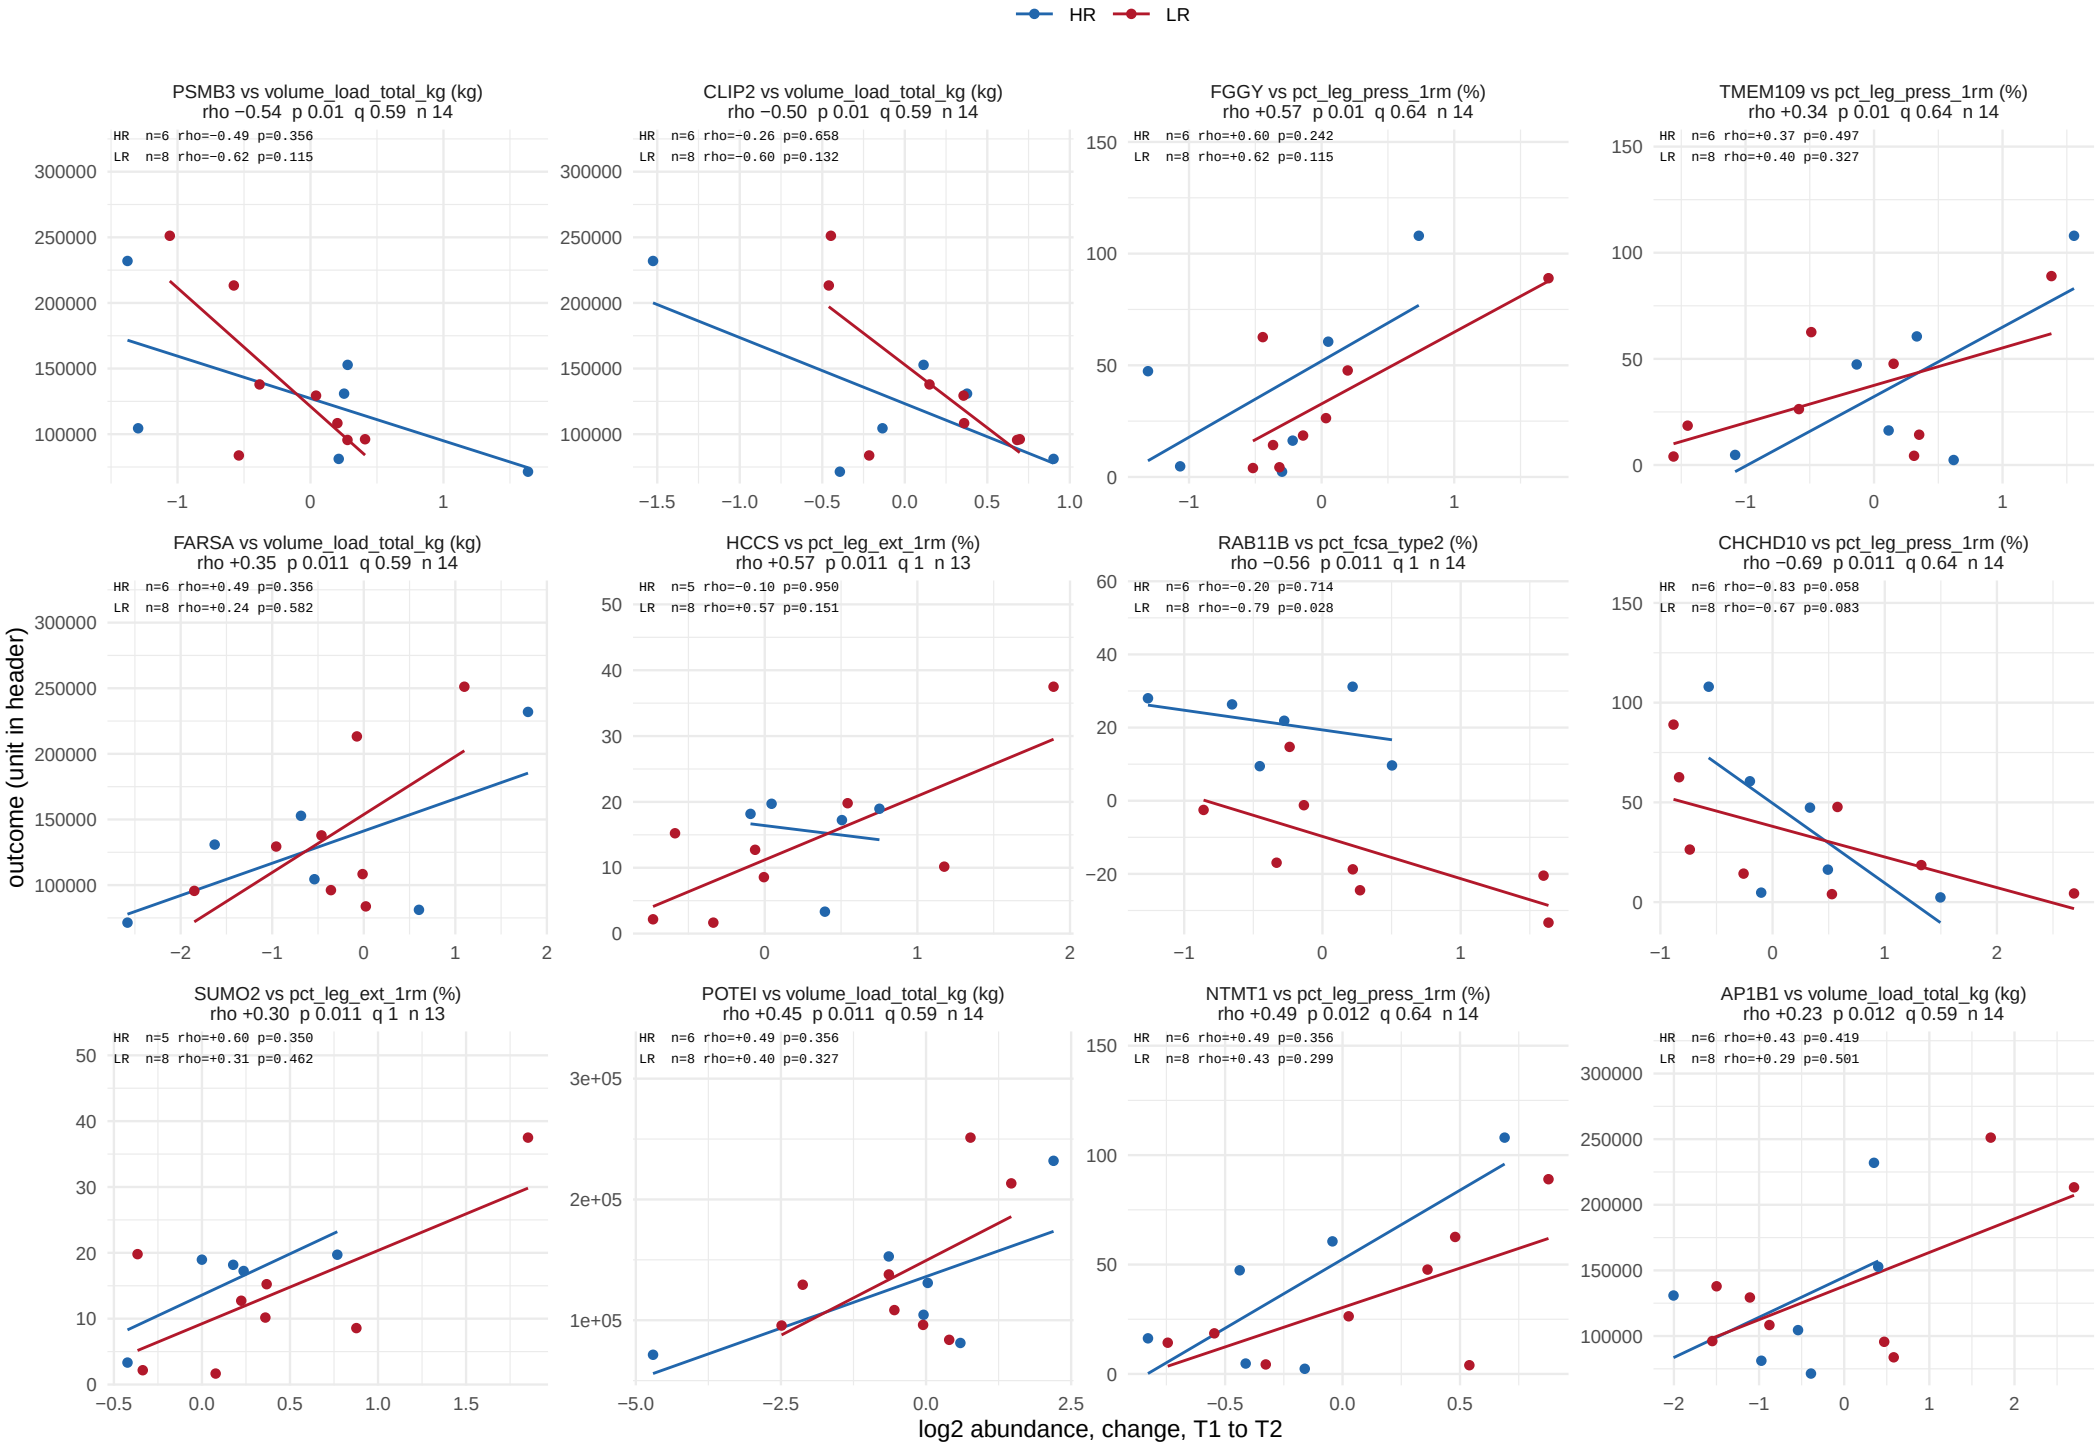

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


628 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 11 of 53.

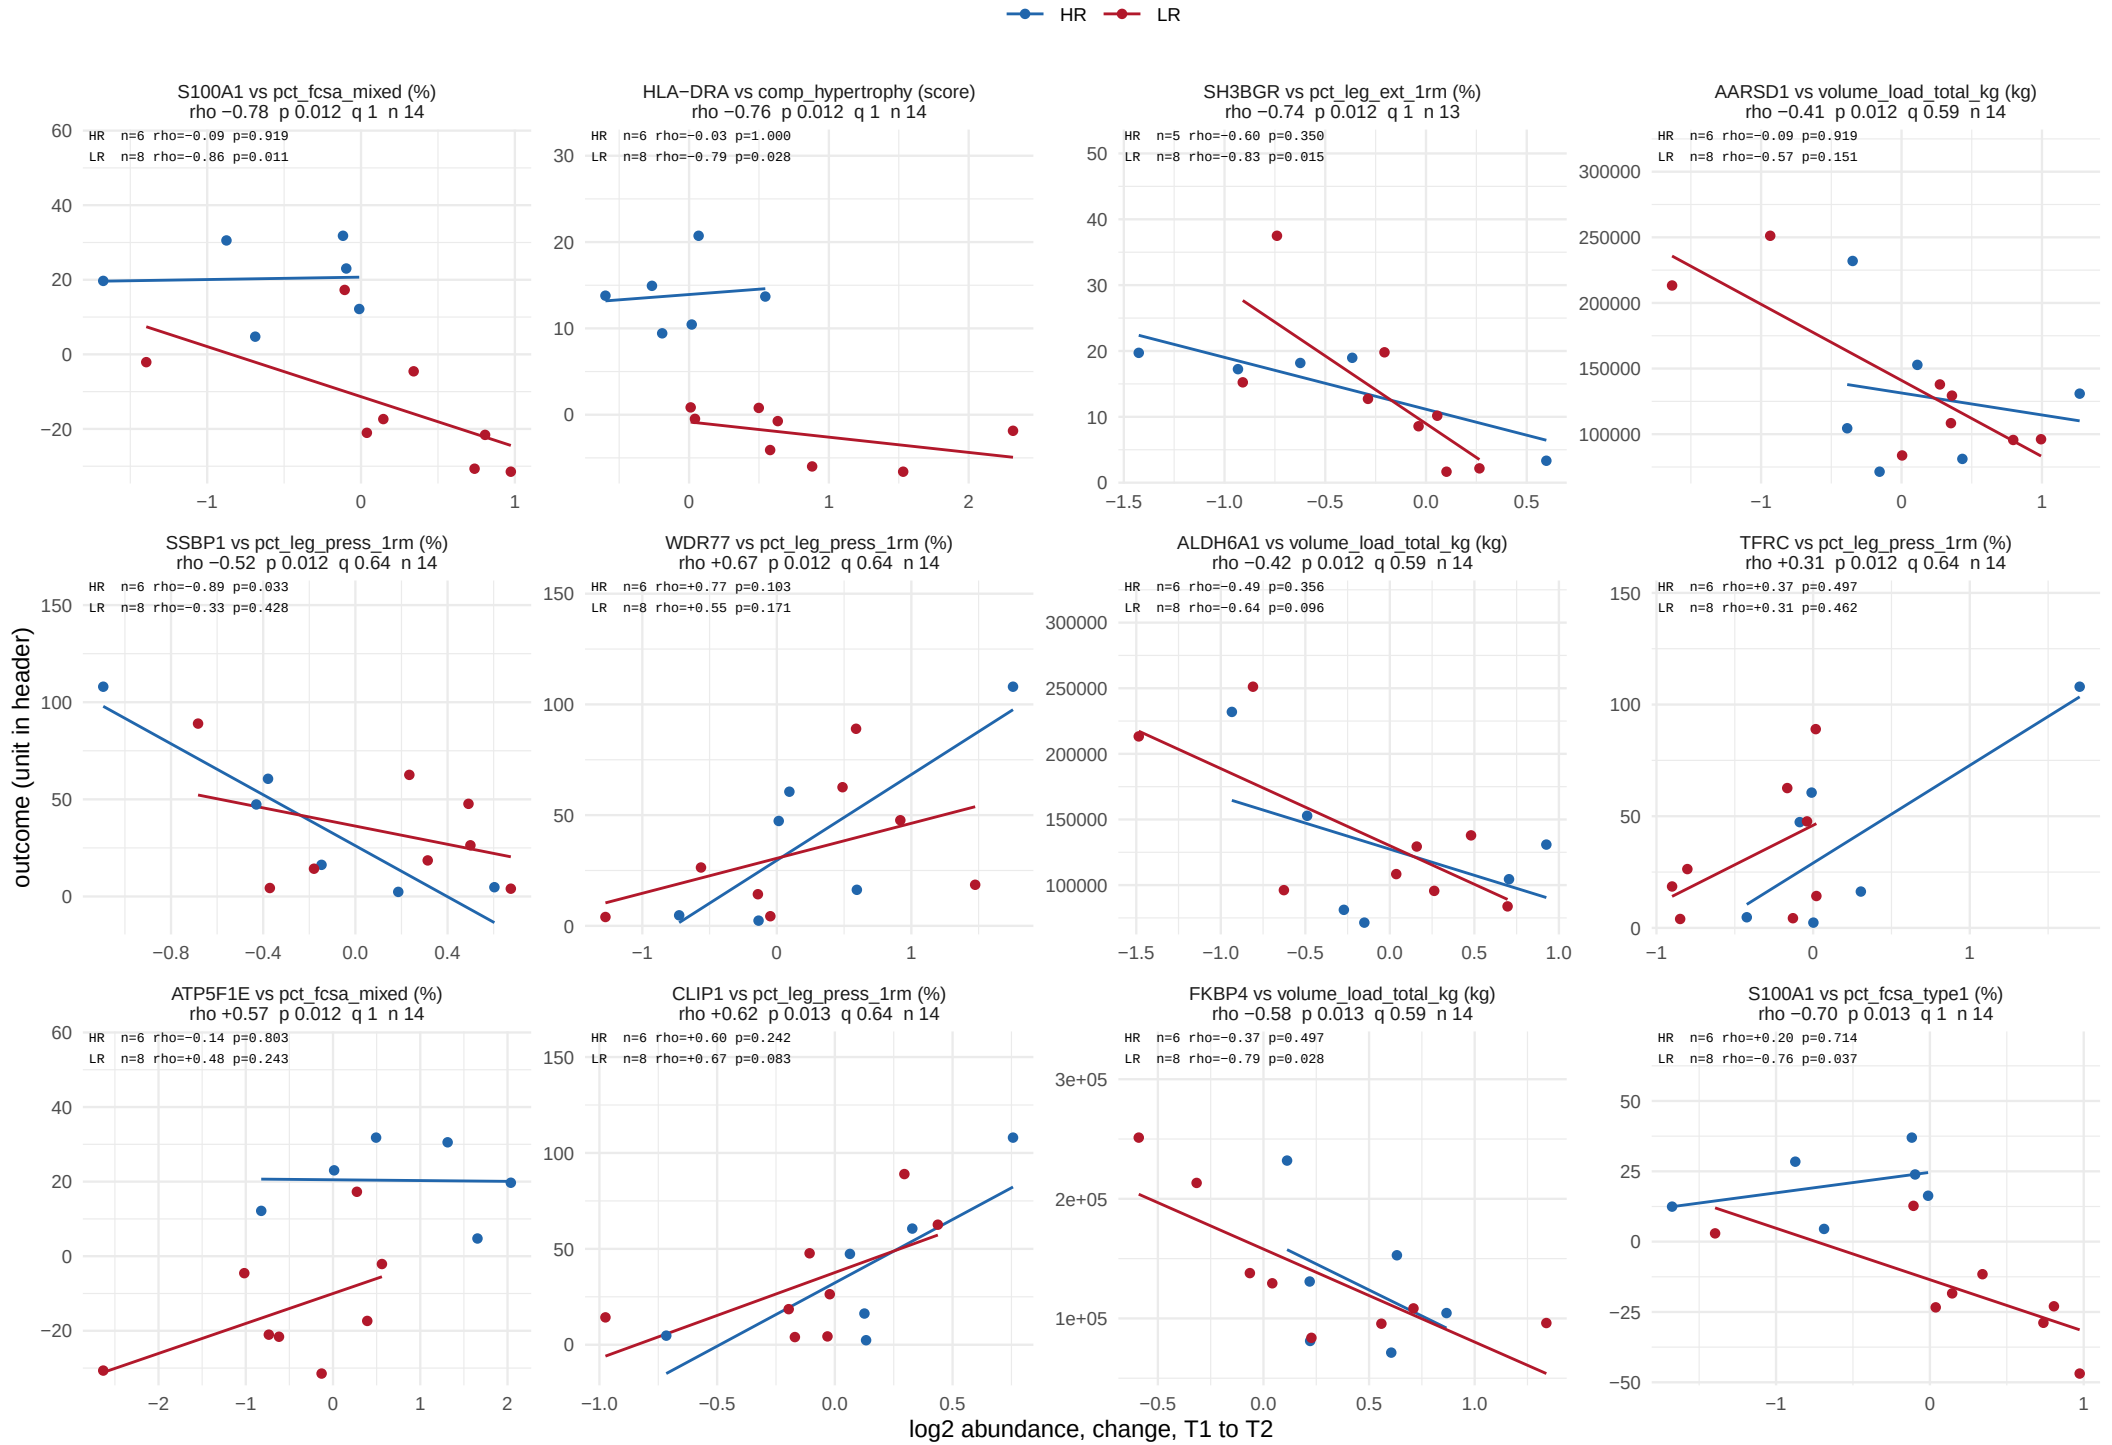

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


628 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 12 of 53.

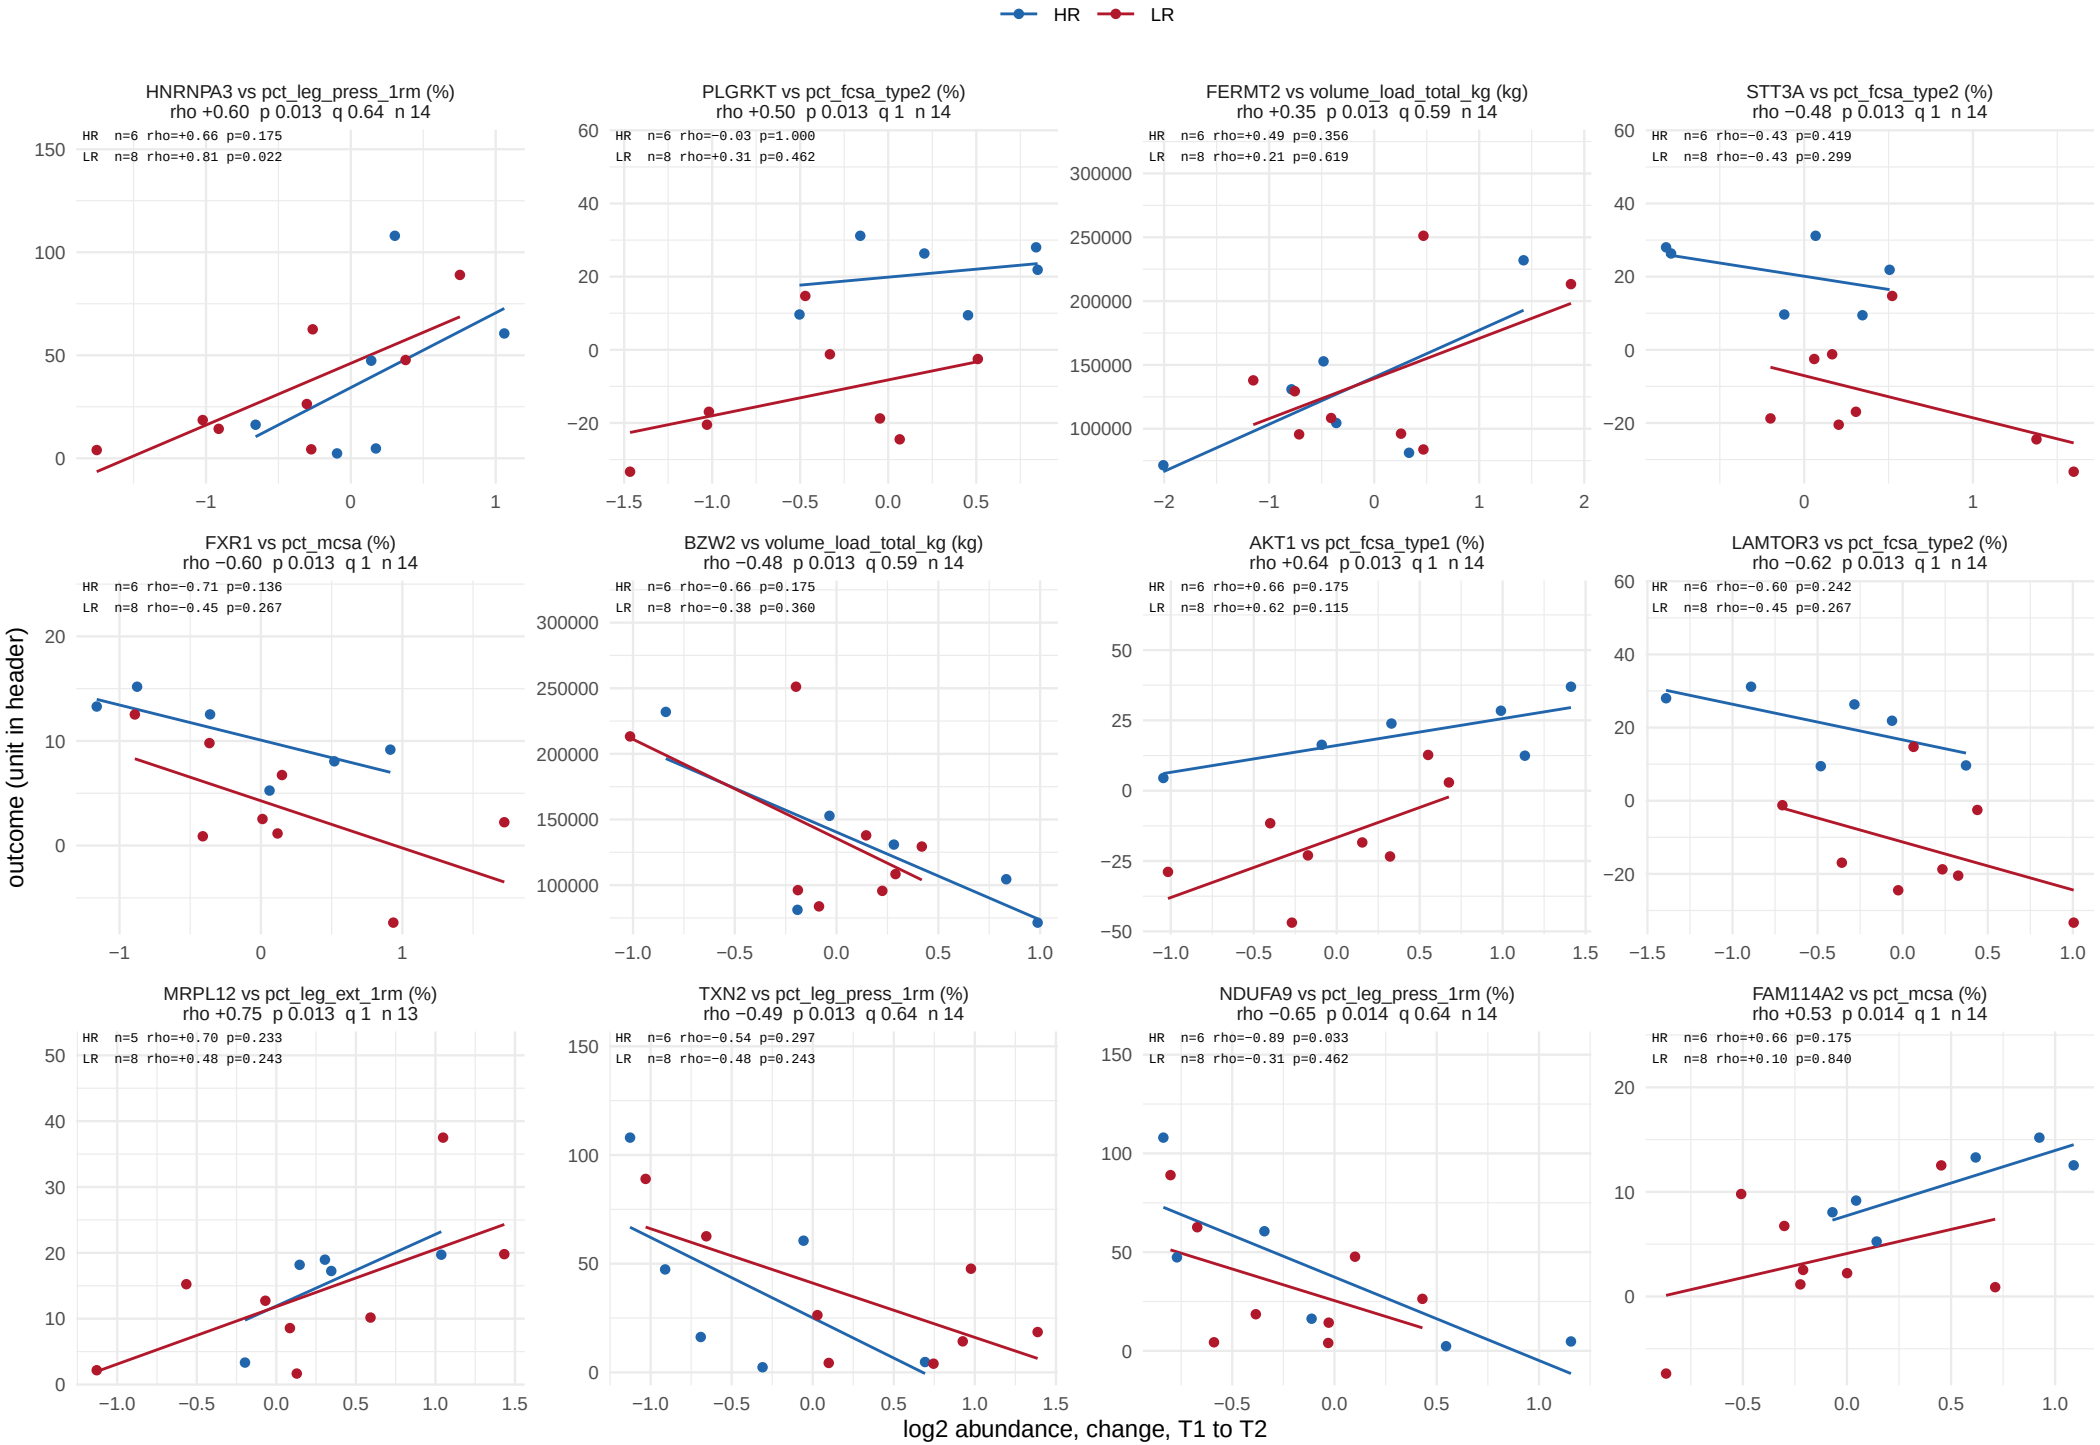

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


628 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 13 of 53.

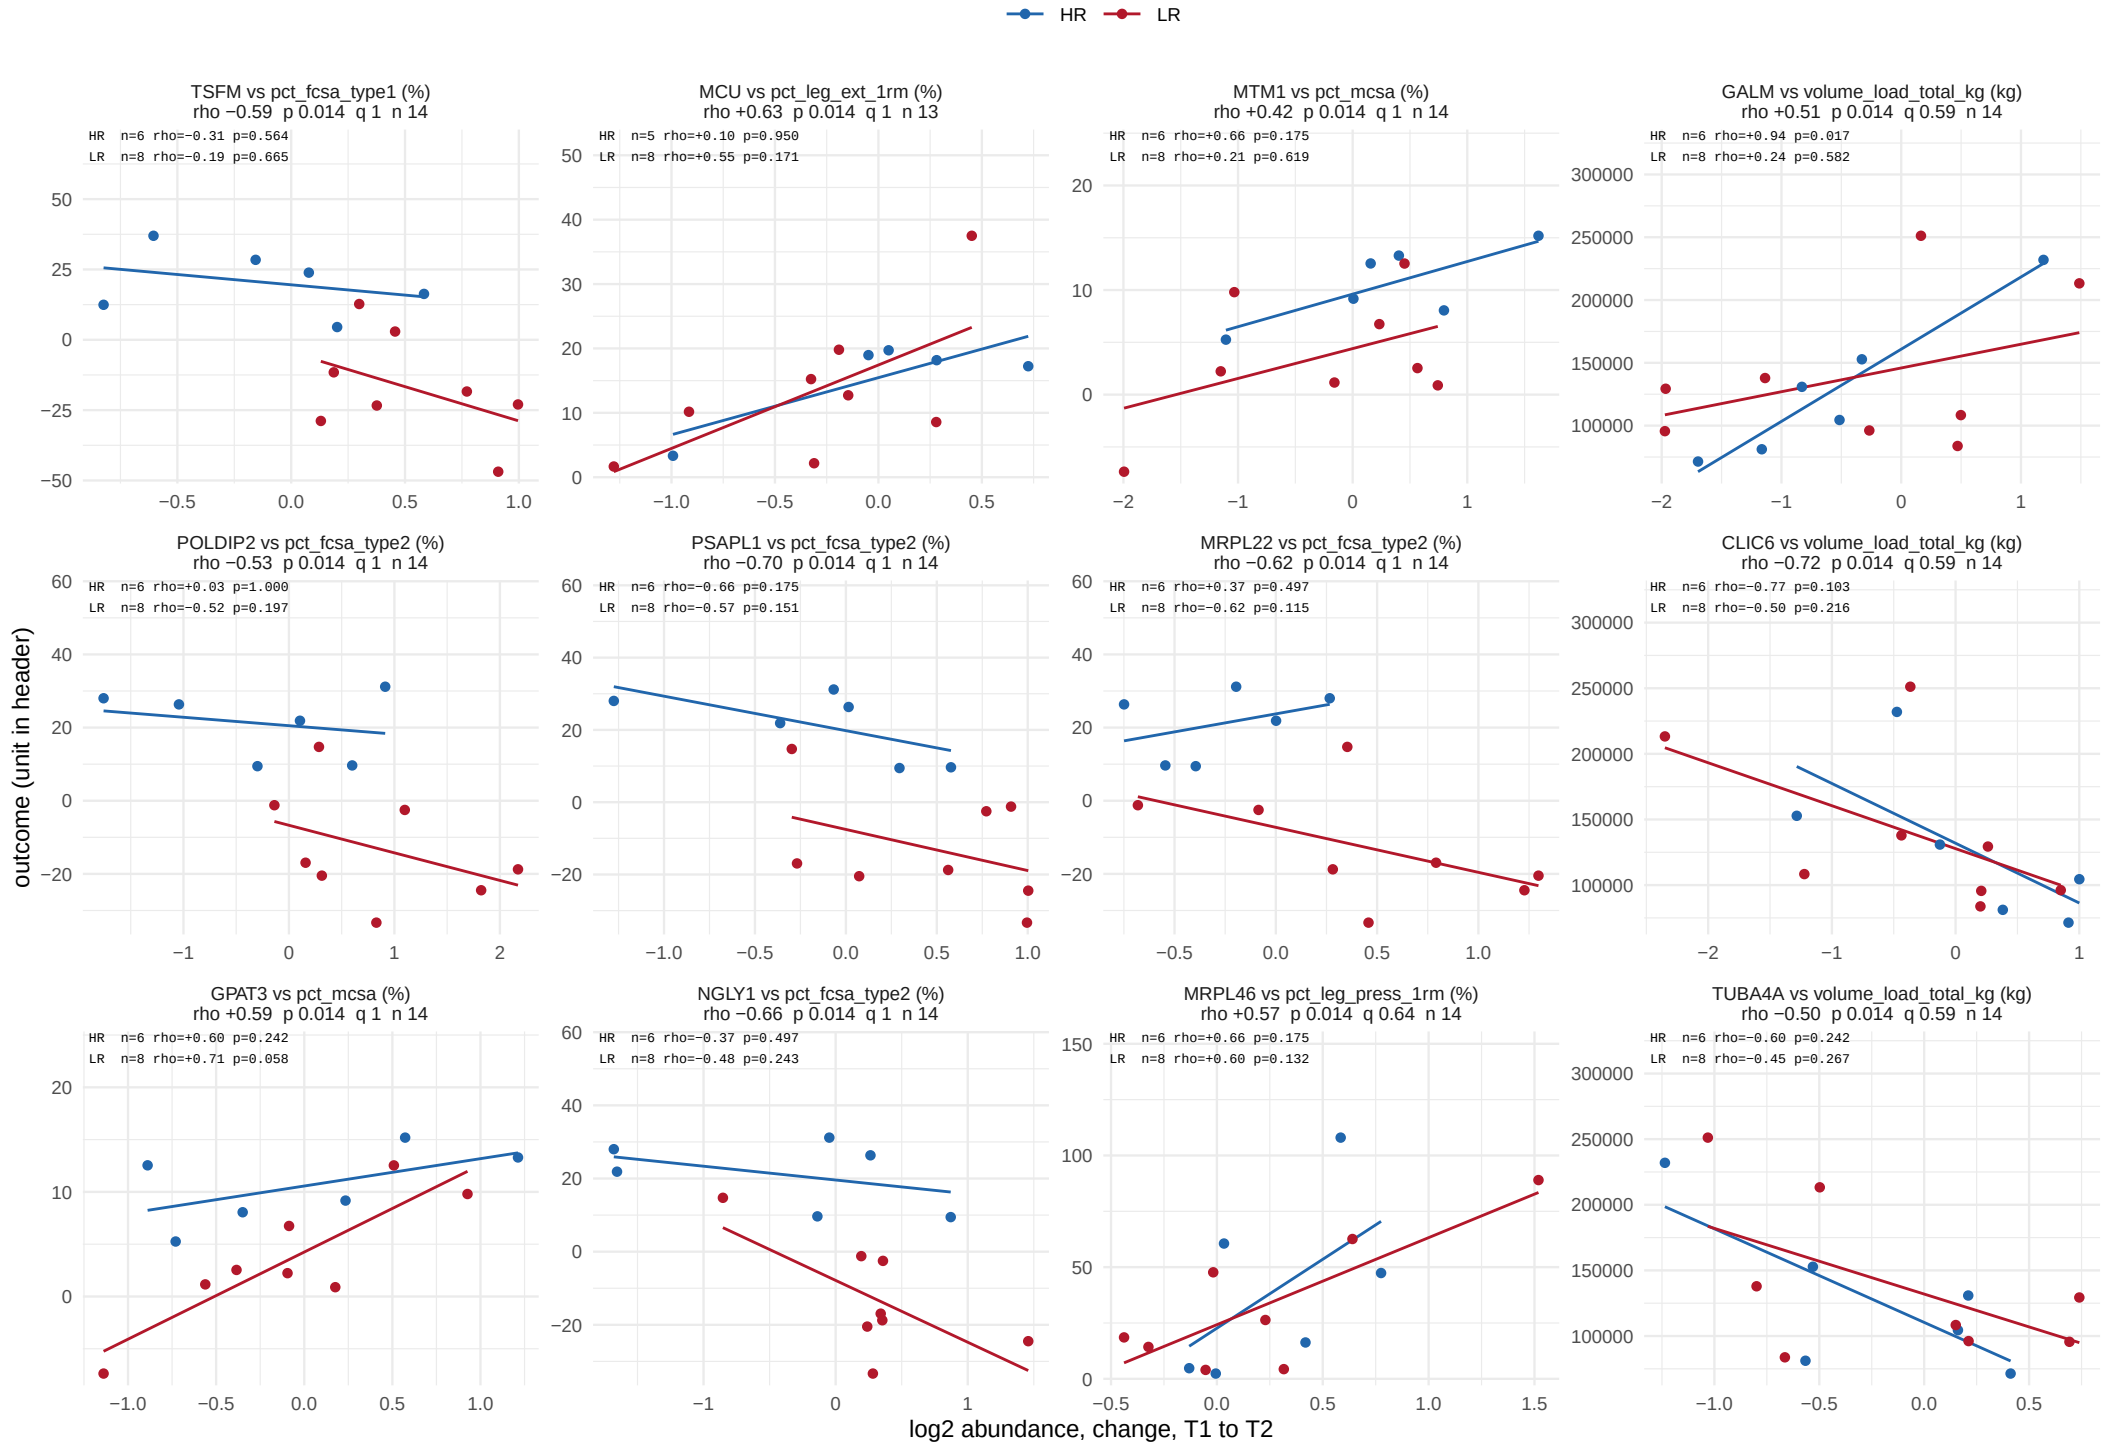

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


628 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 14 of 53.

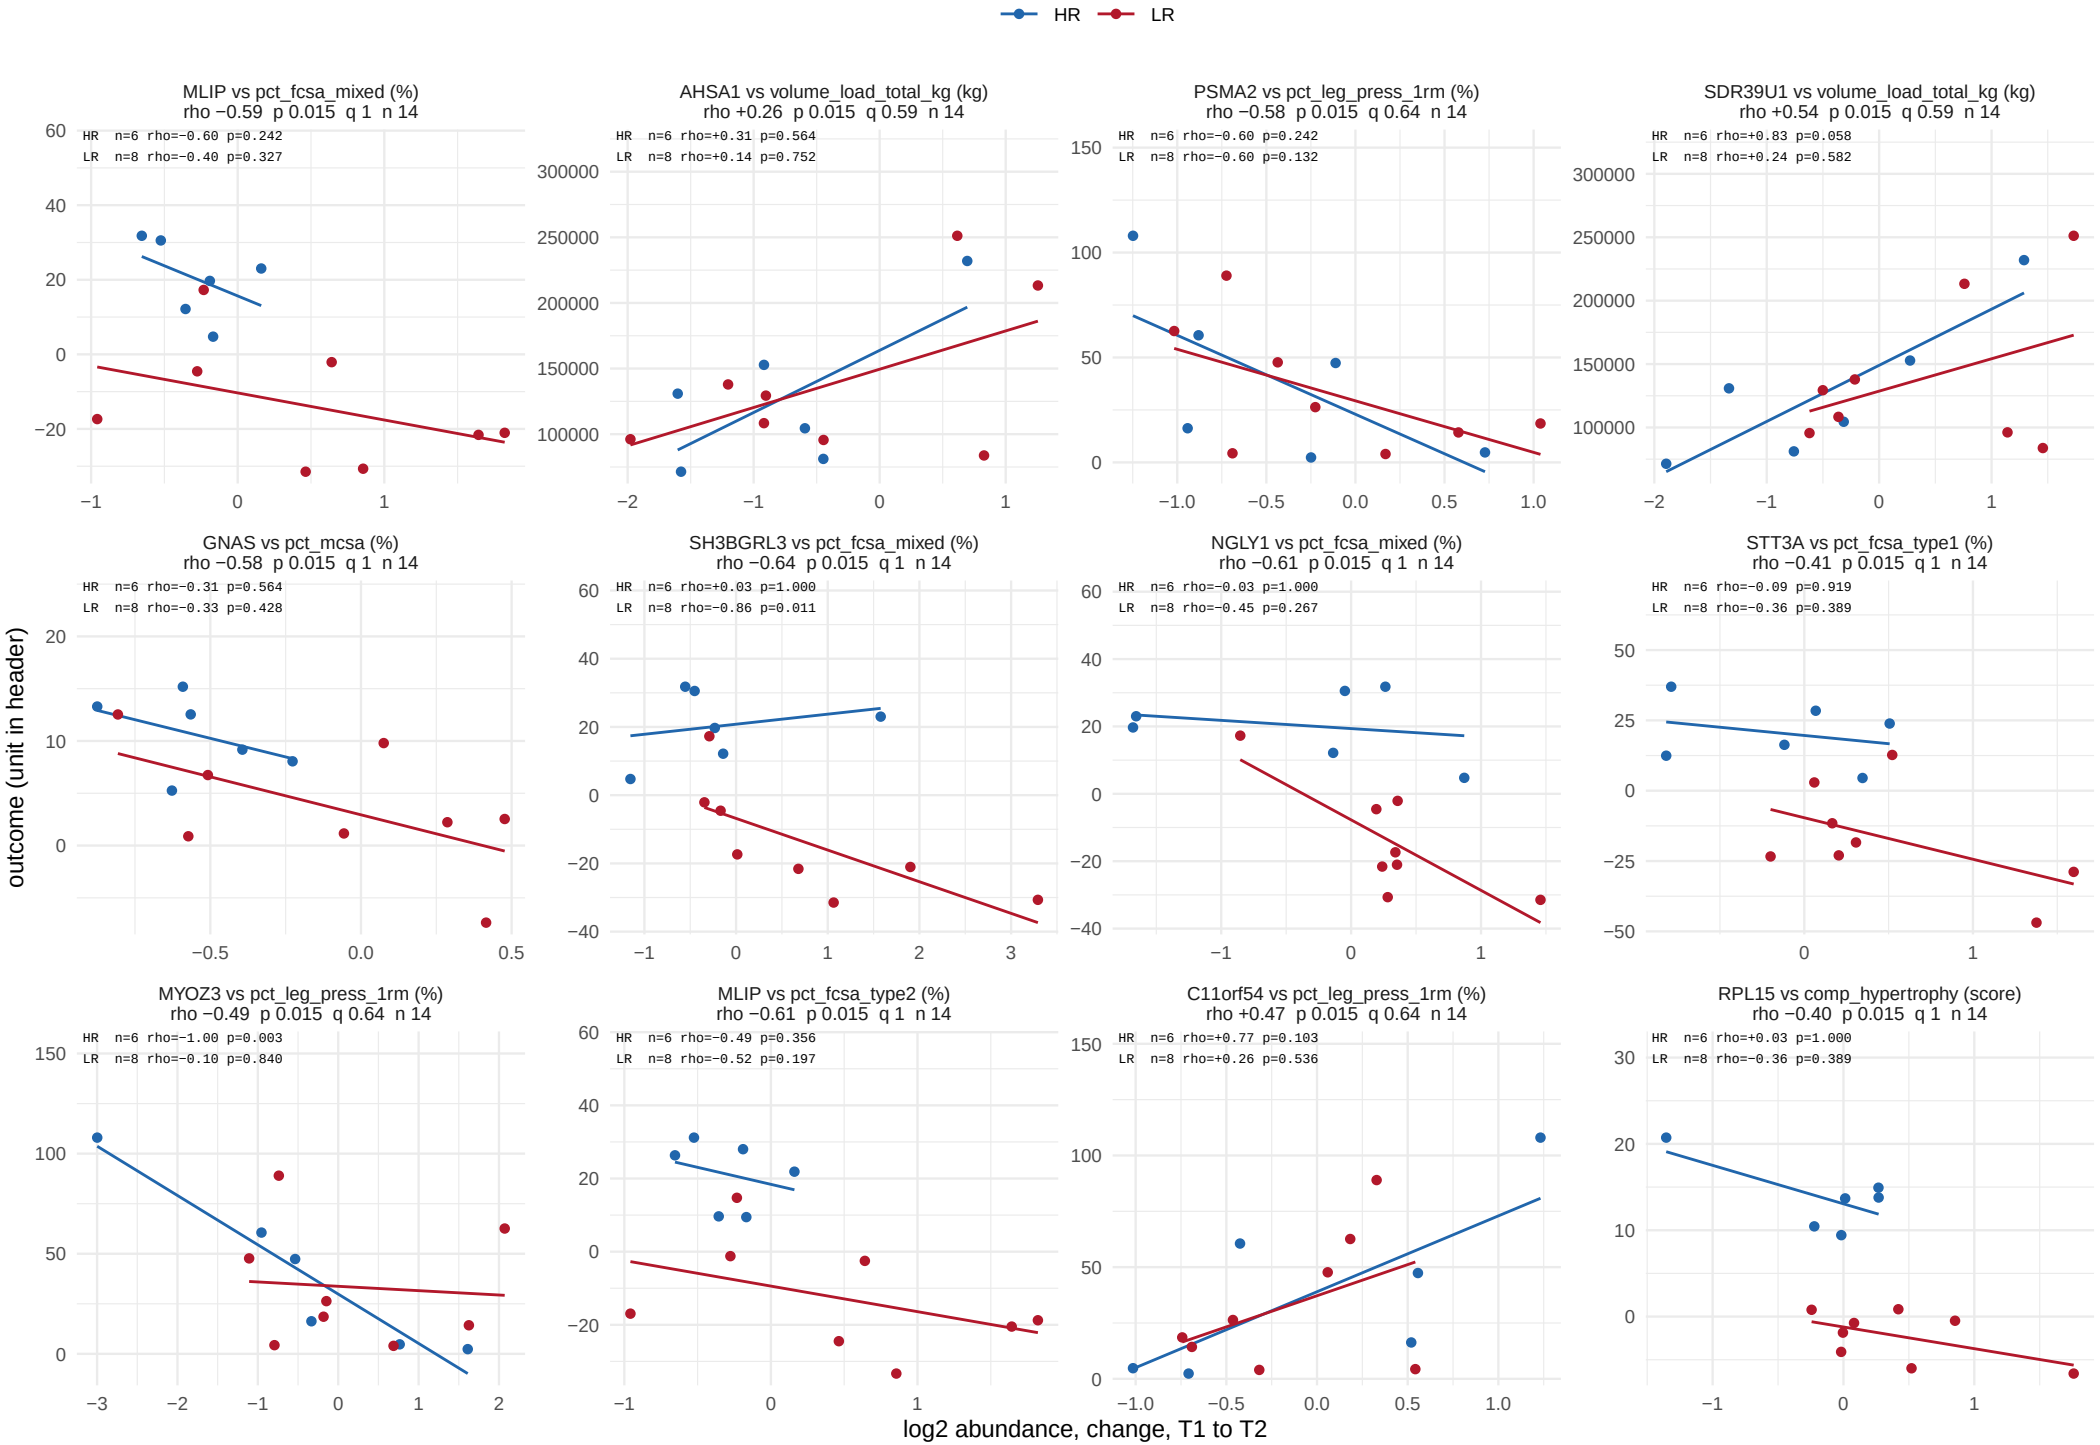

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


628 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 15 of 53.

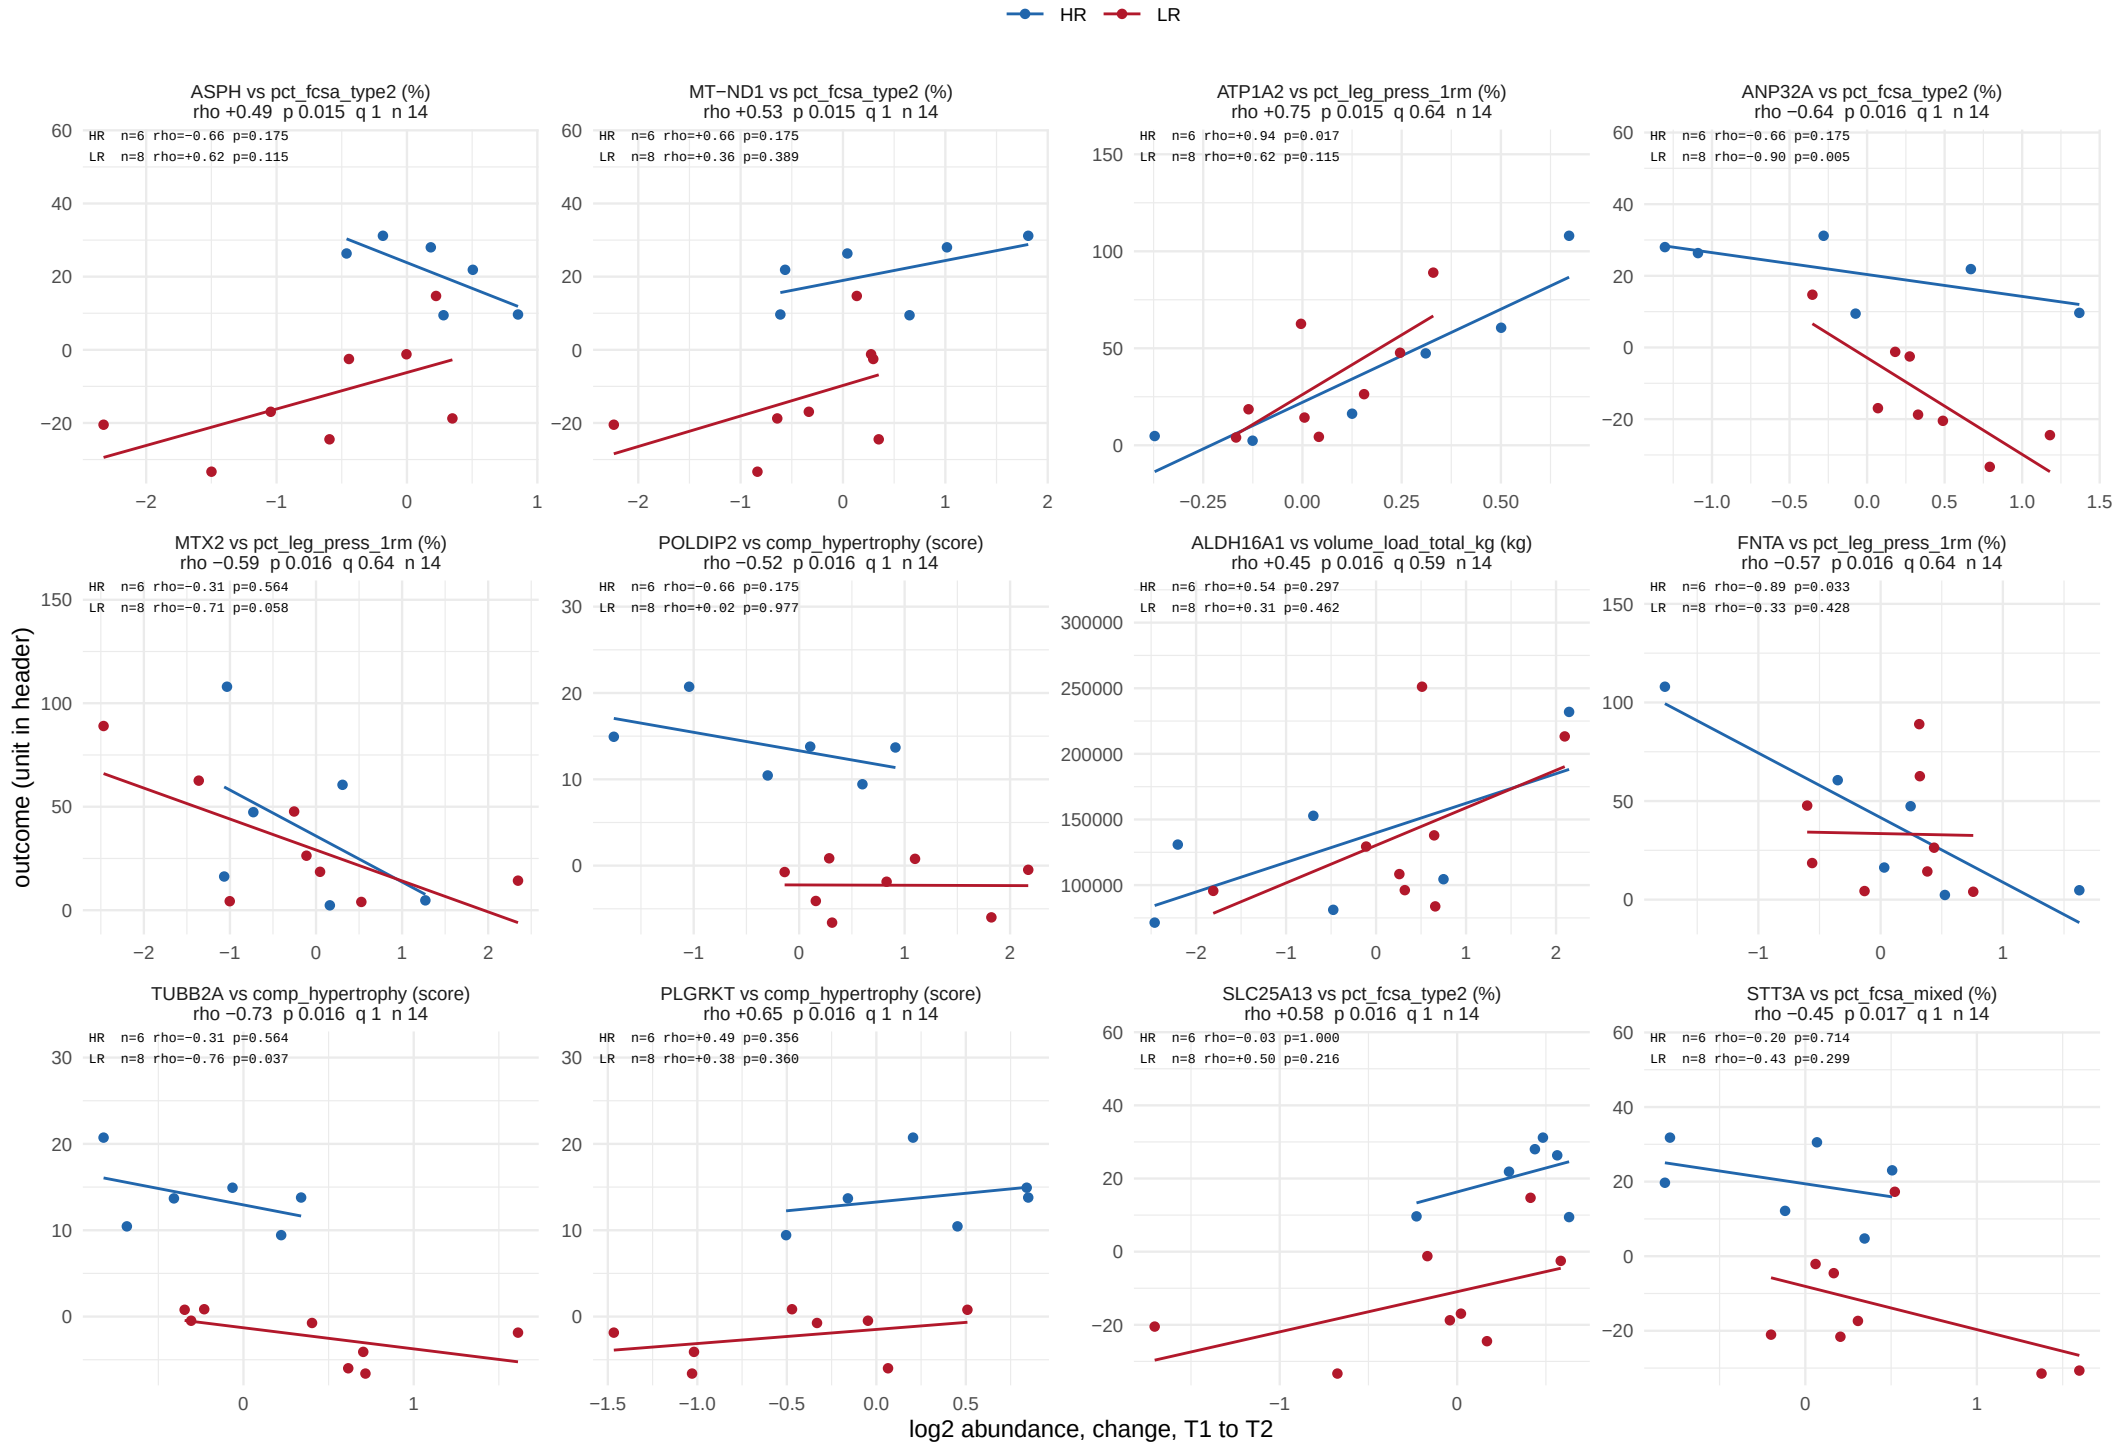

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


628 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 16 of 53.

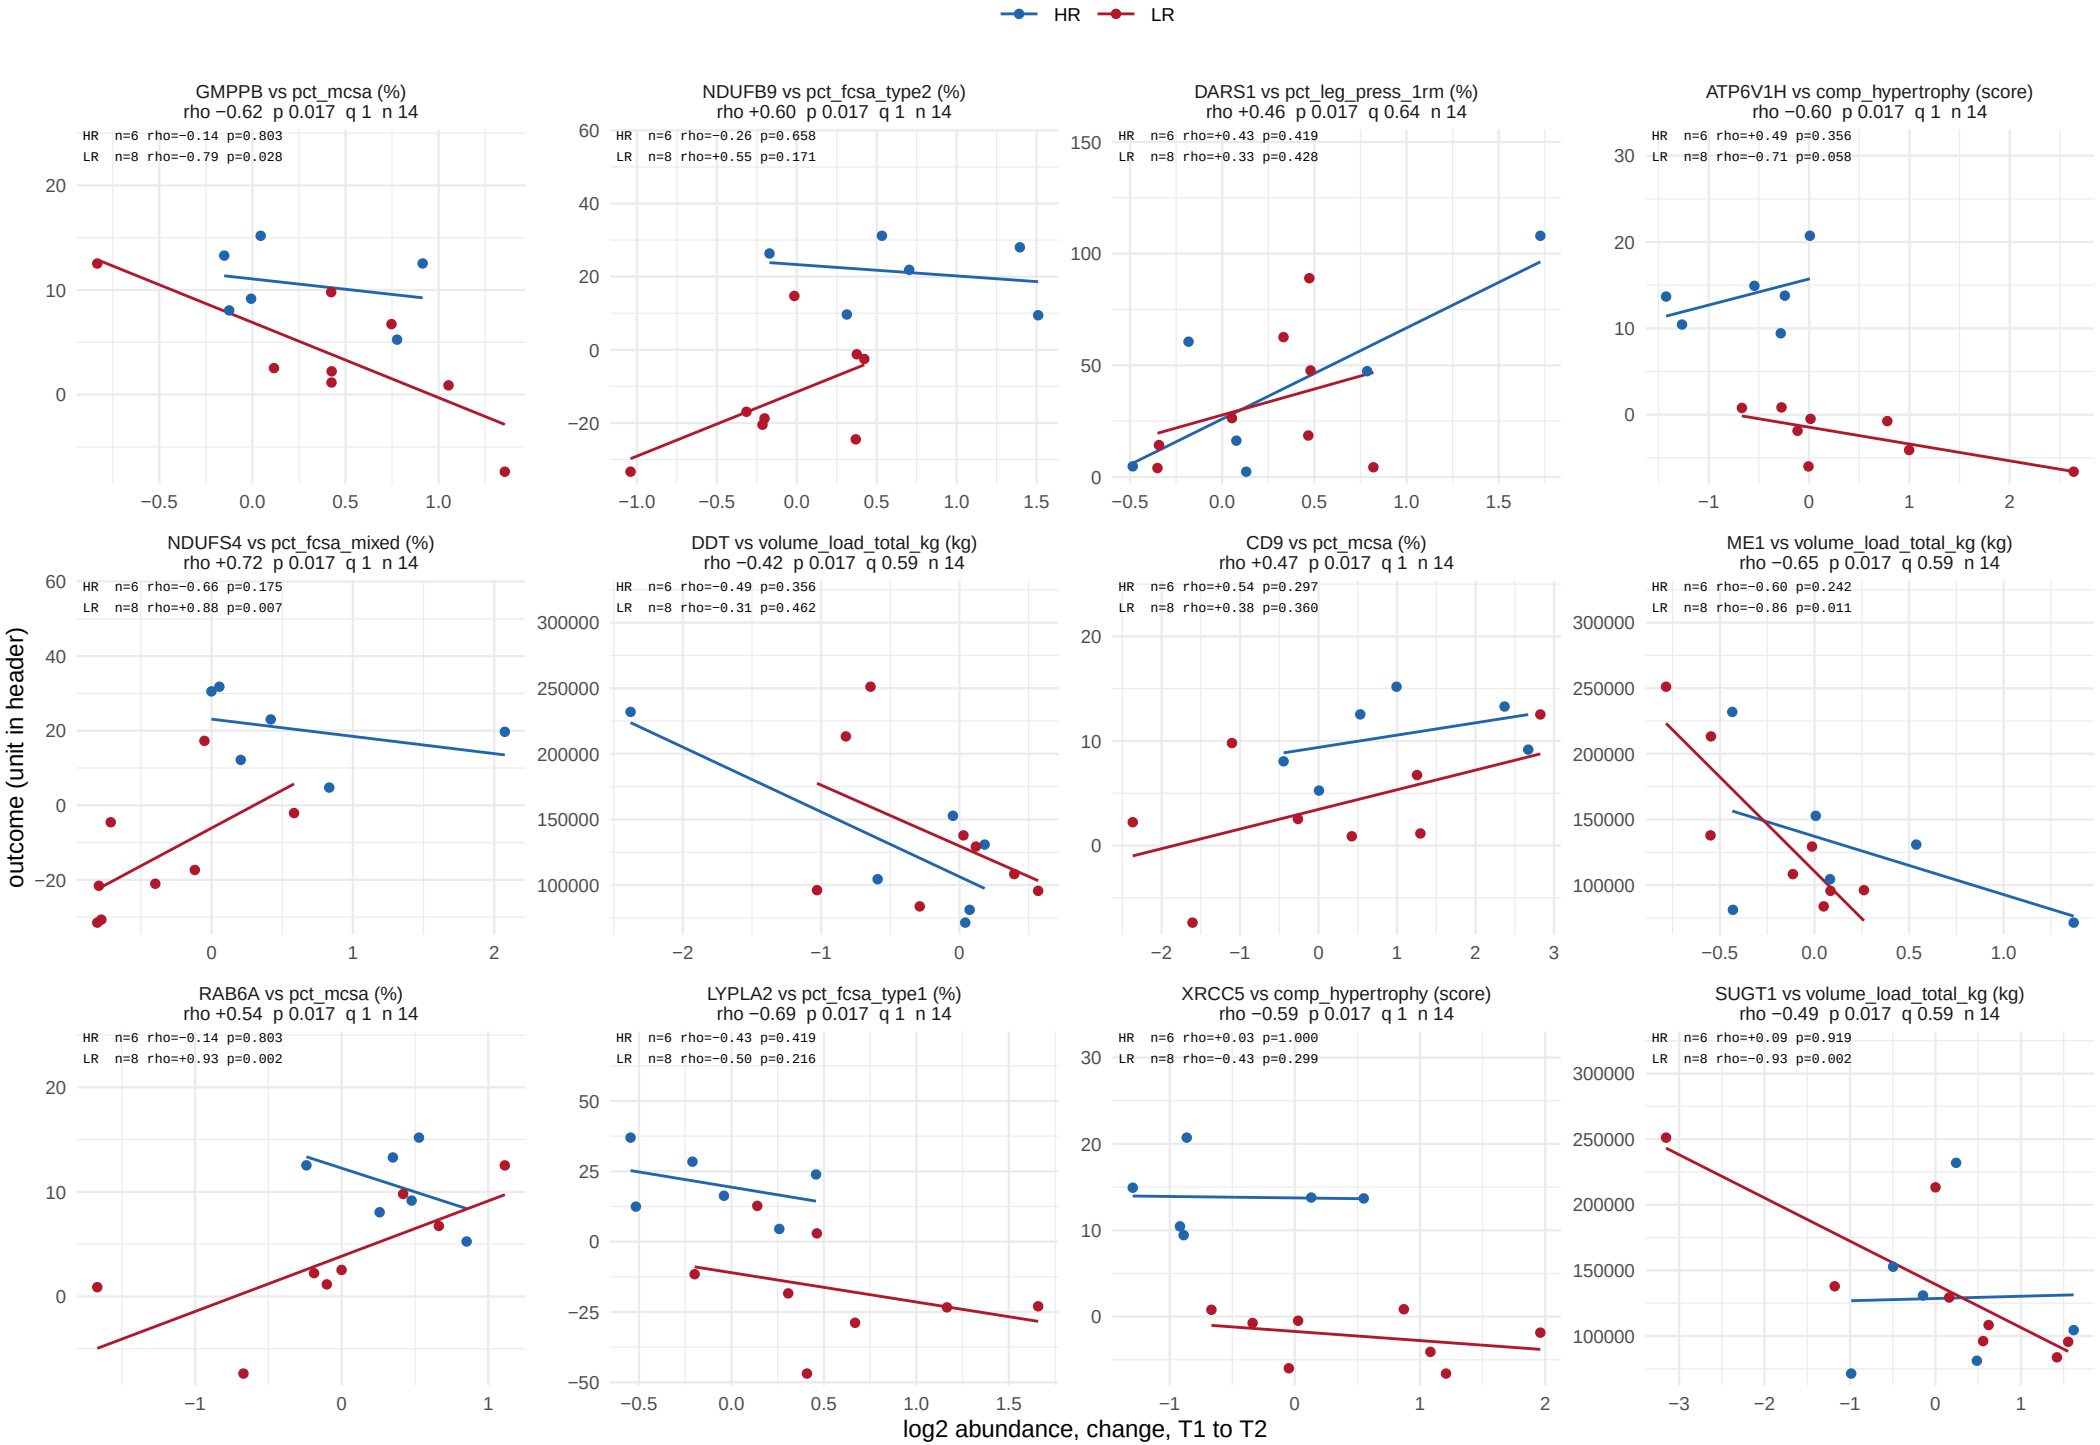

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


628 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 17 of 53.

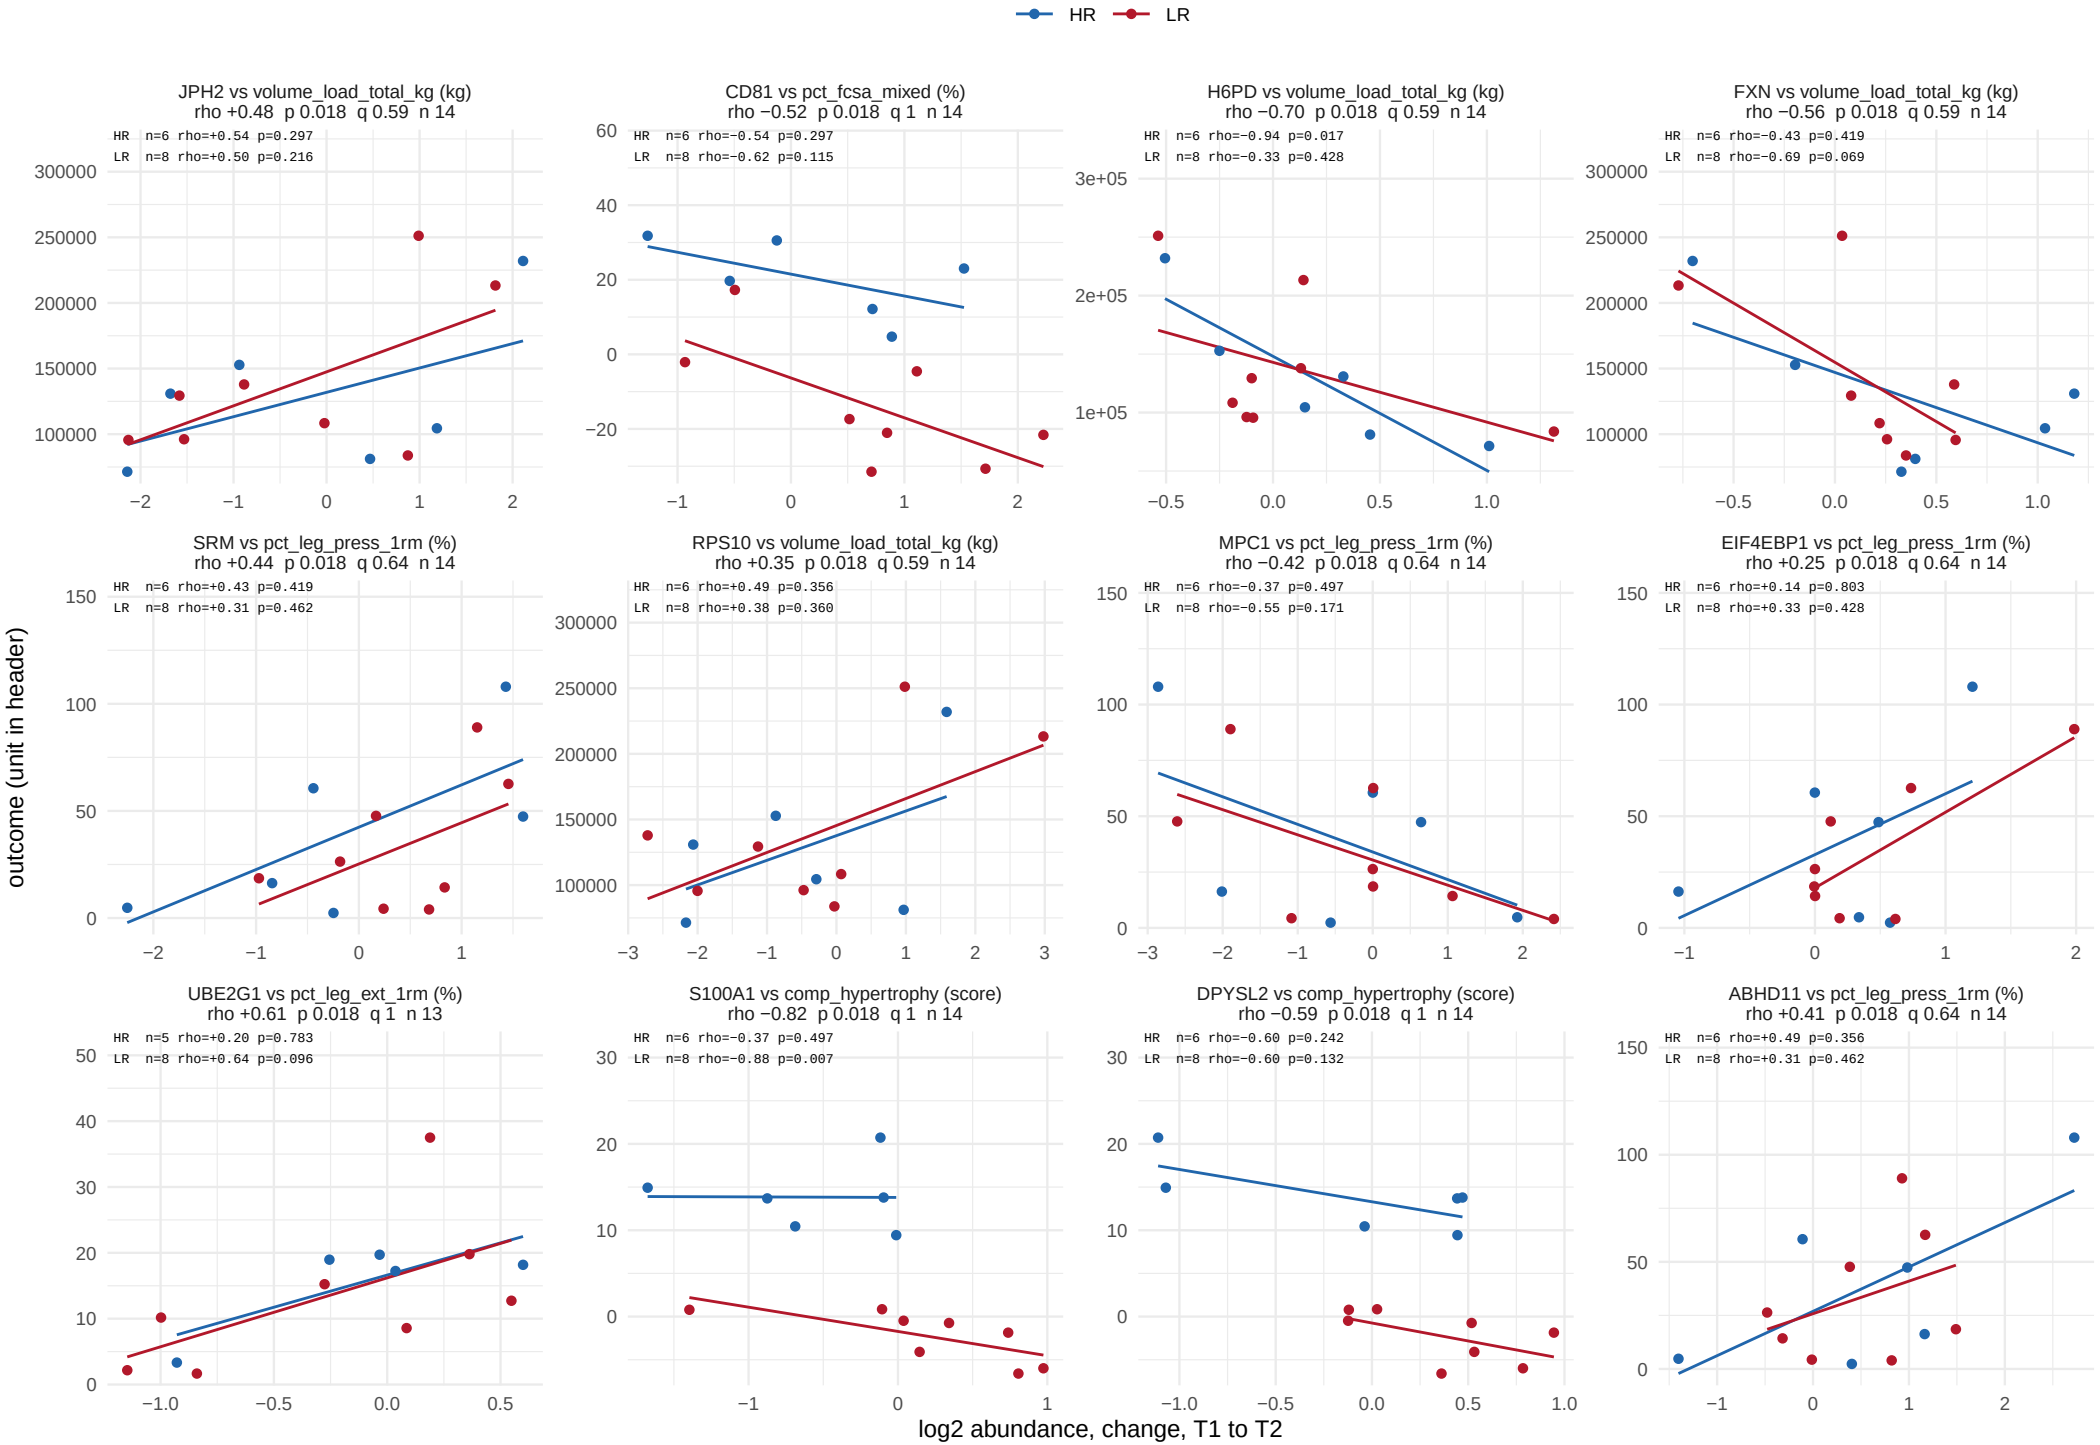

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


628 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 18 of 53.

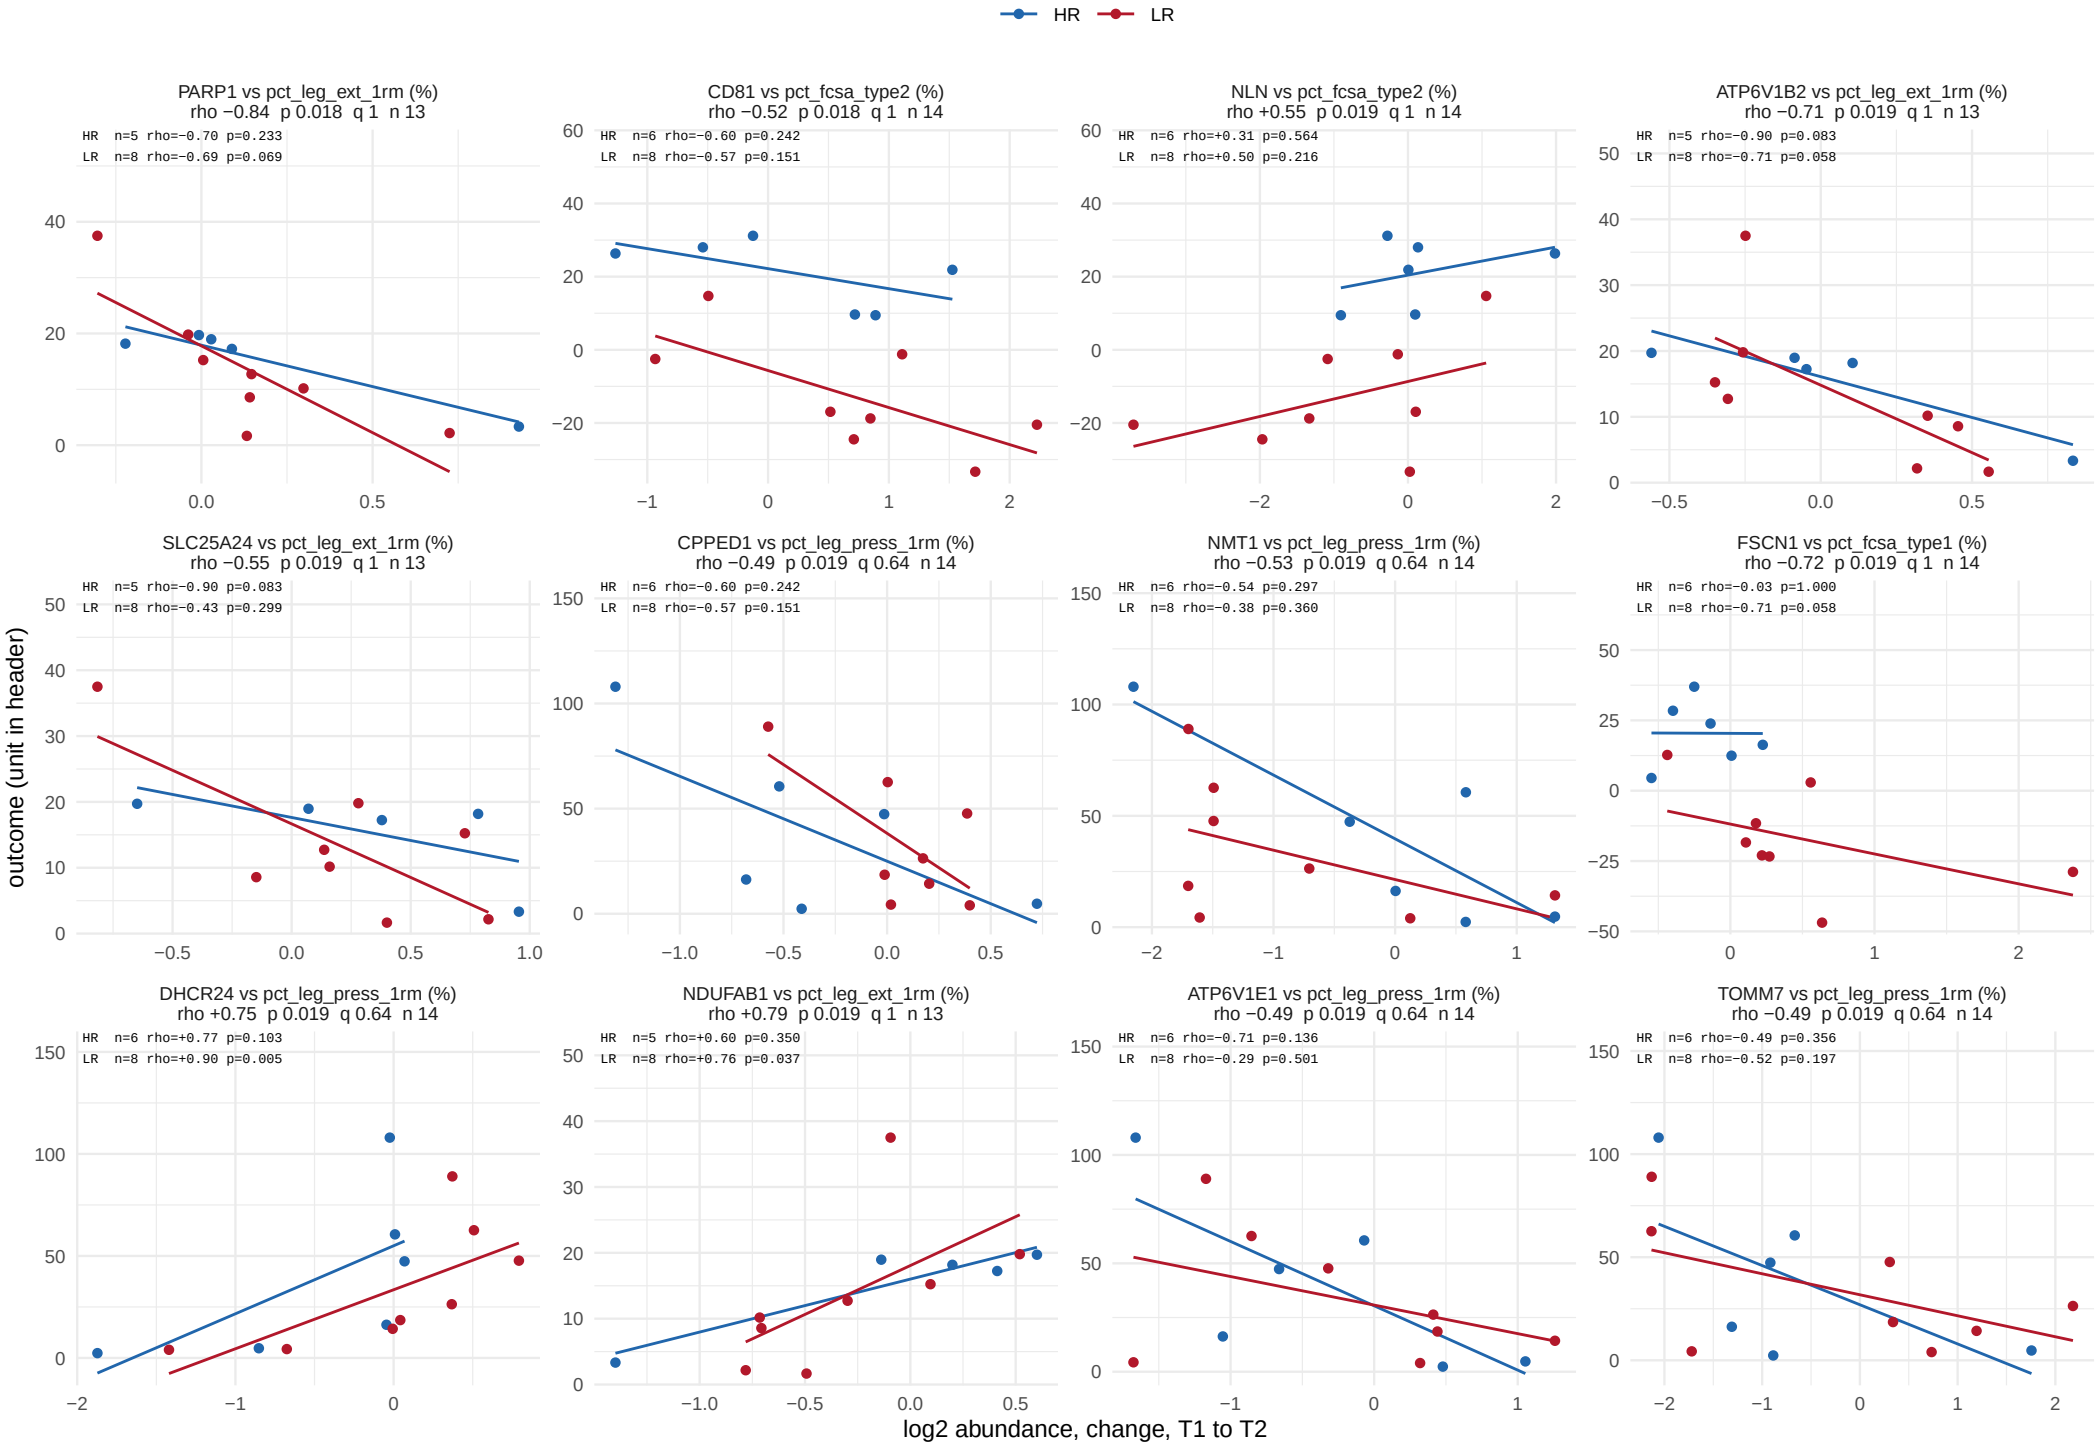

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


628 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 19 of 53.

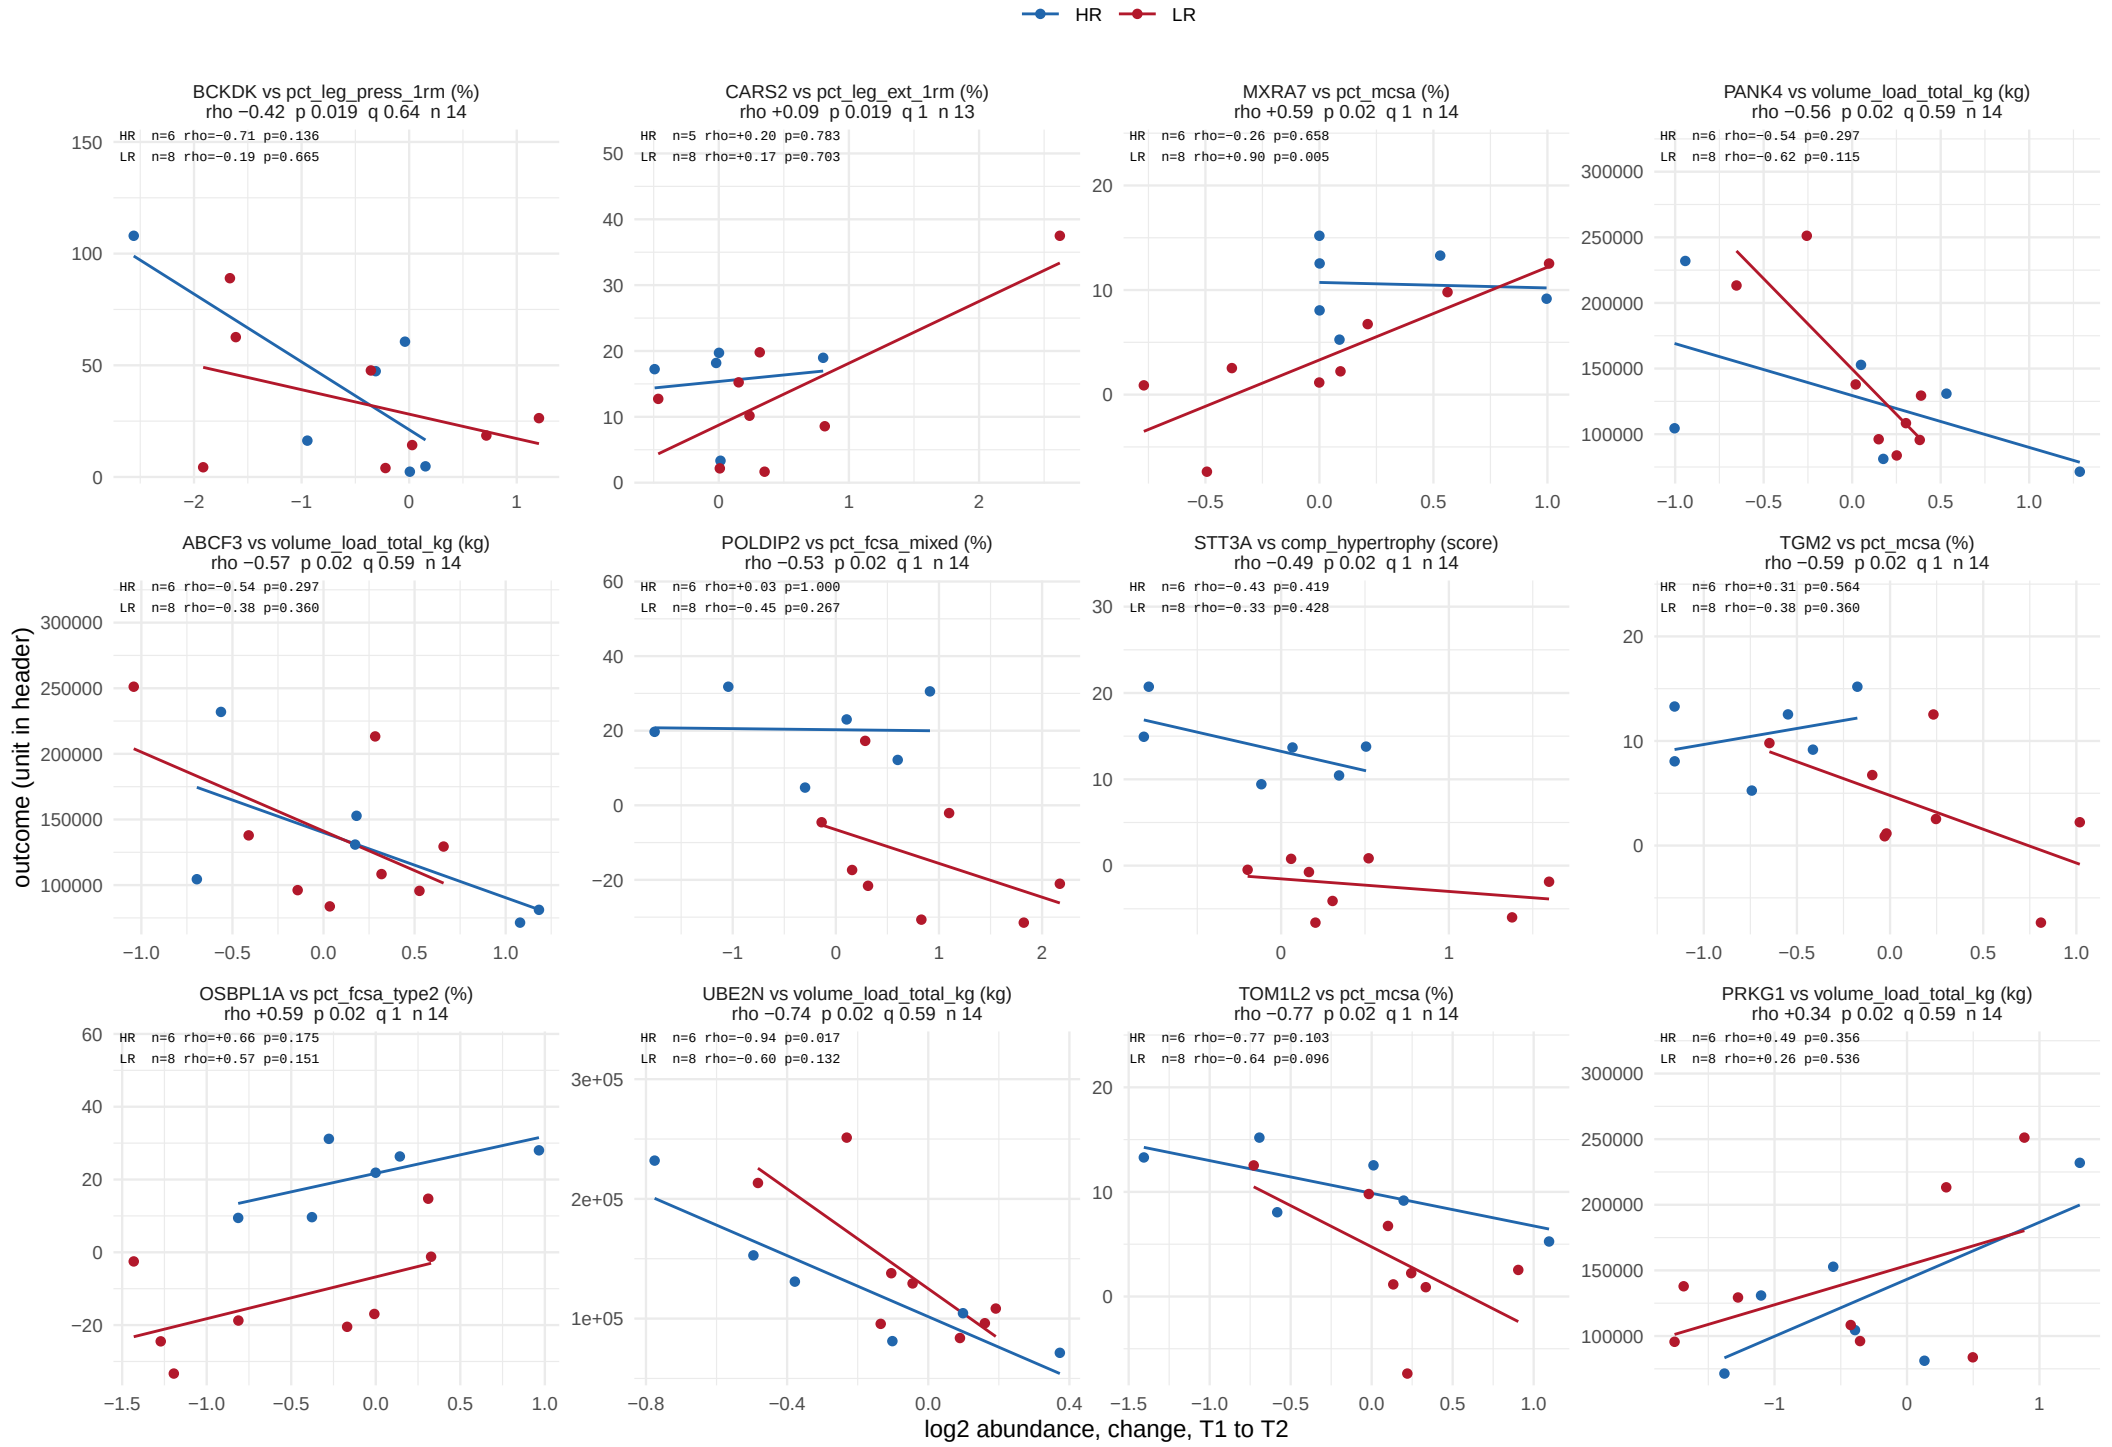

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


628 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 20 of 53.

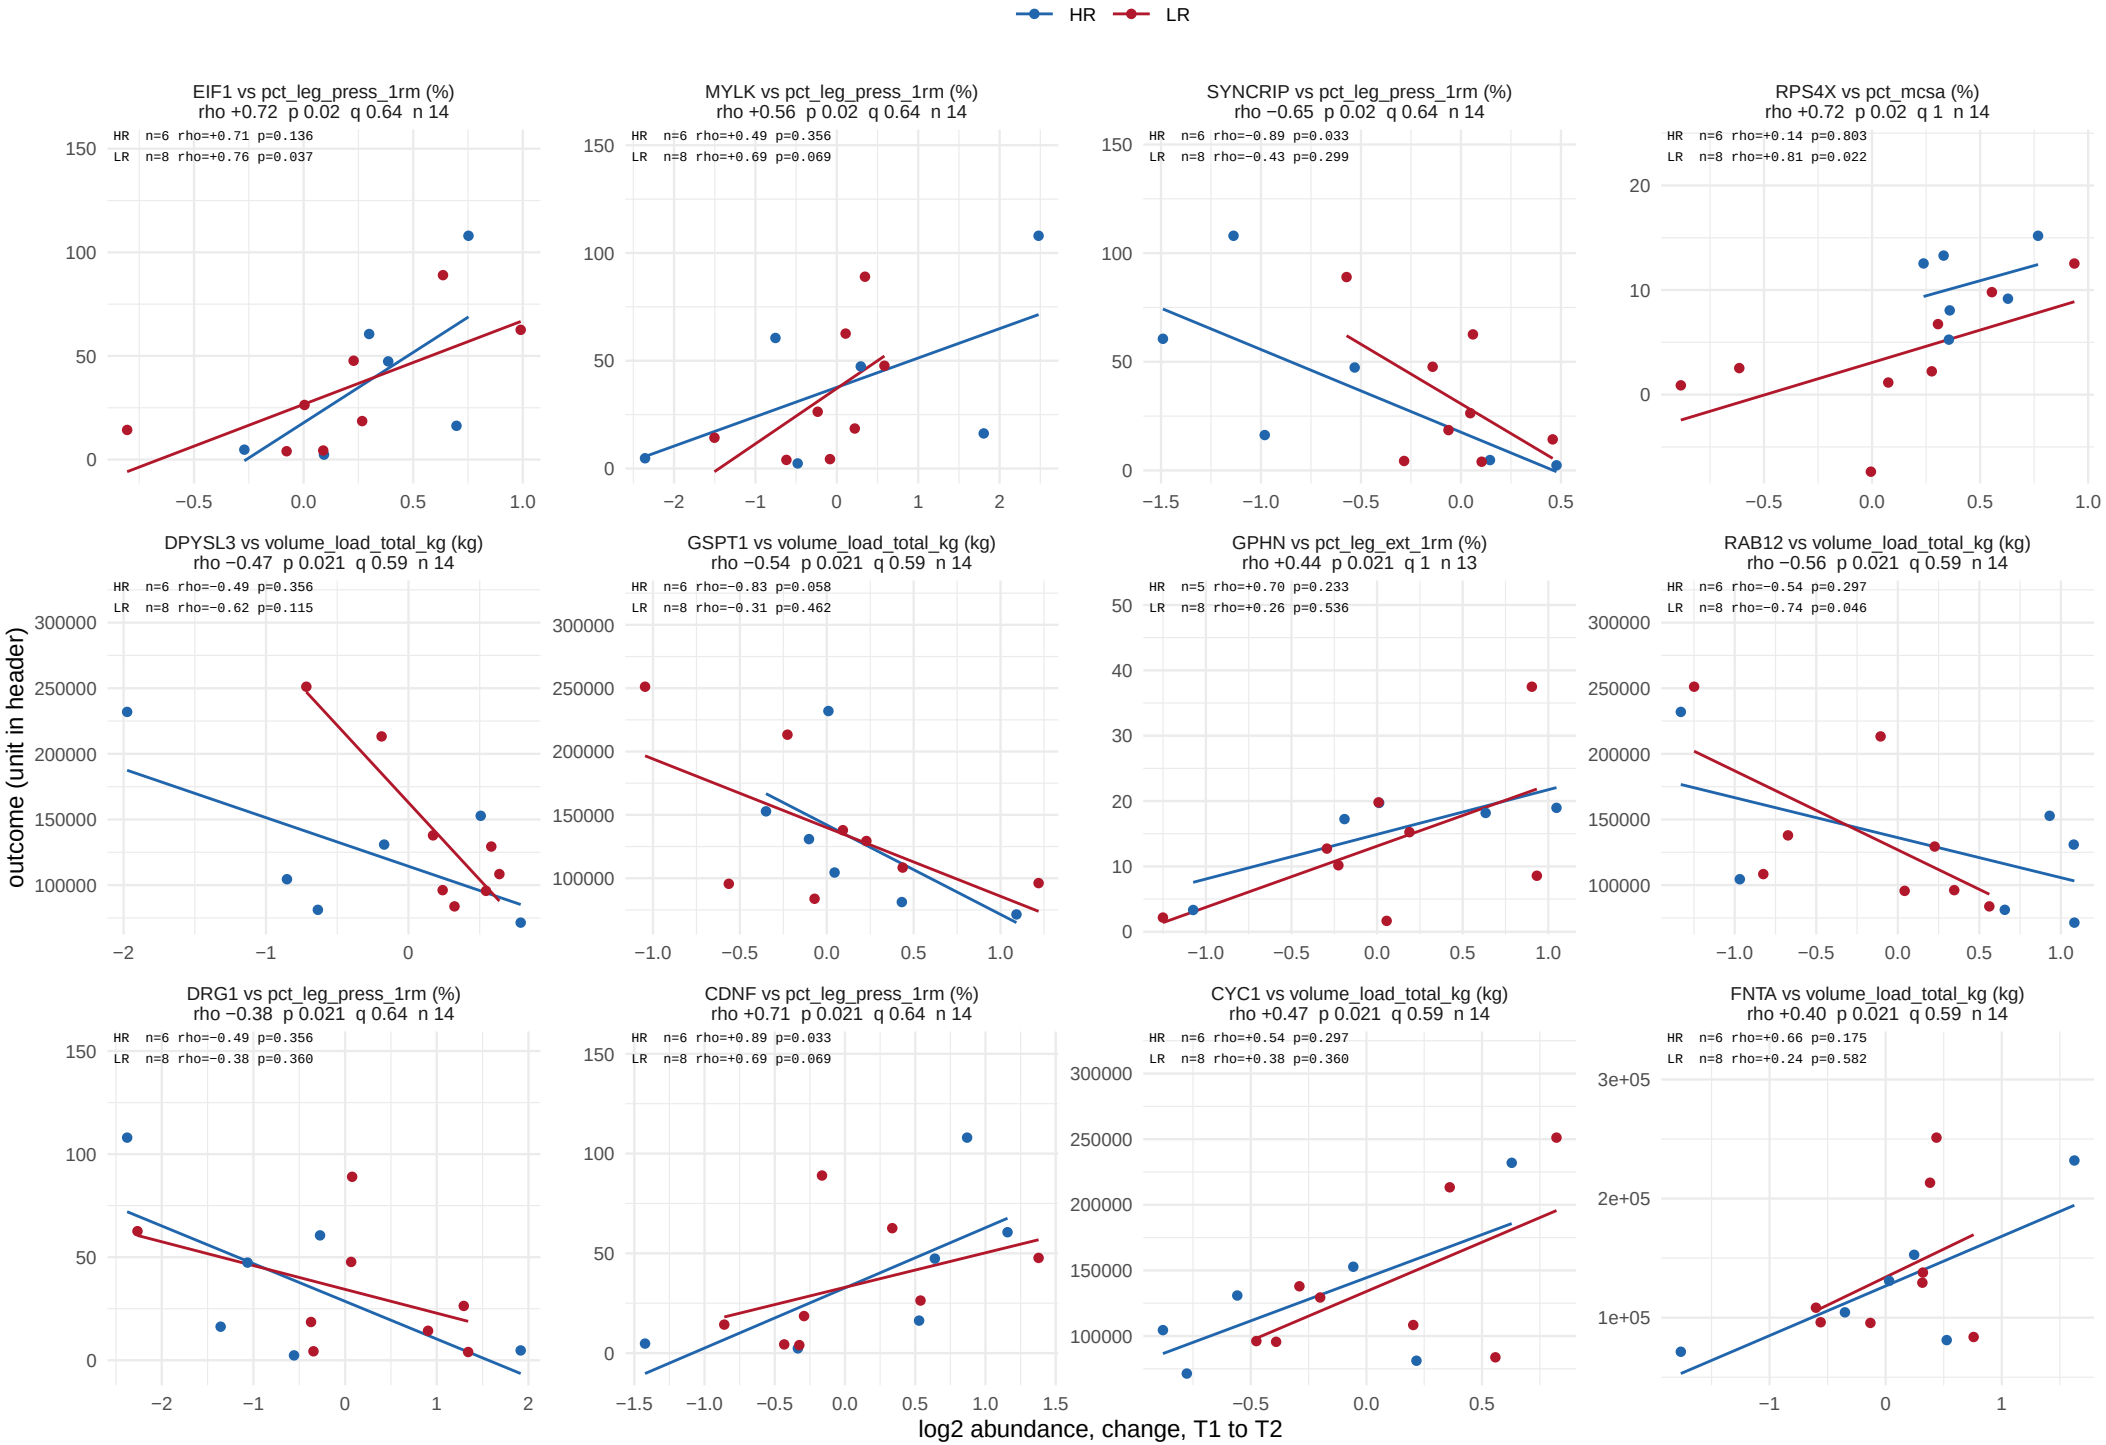

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


628 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 21 of 53.

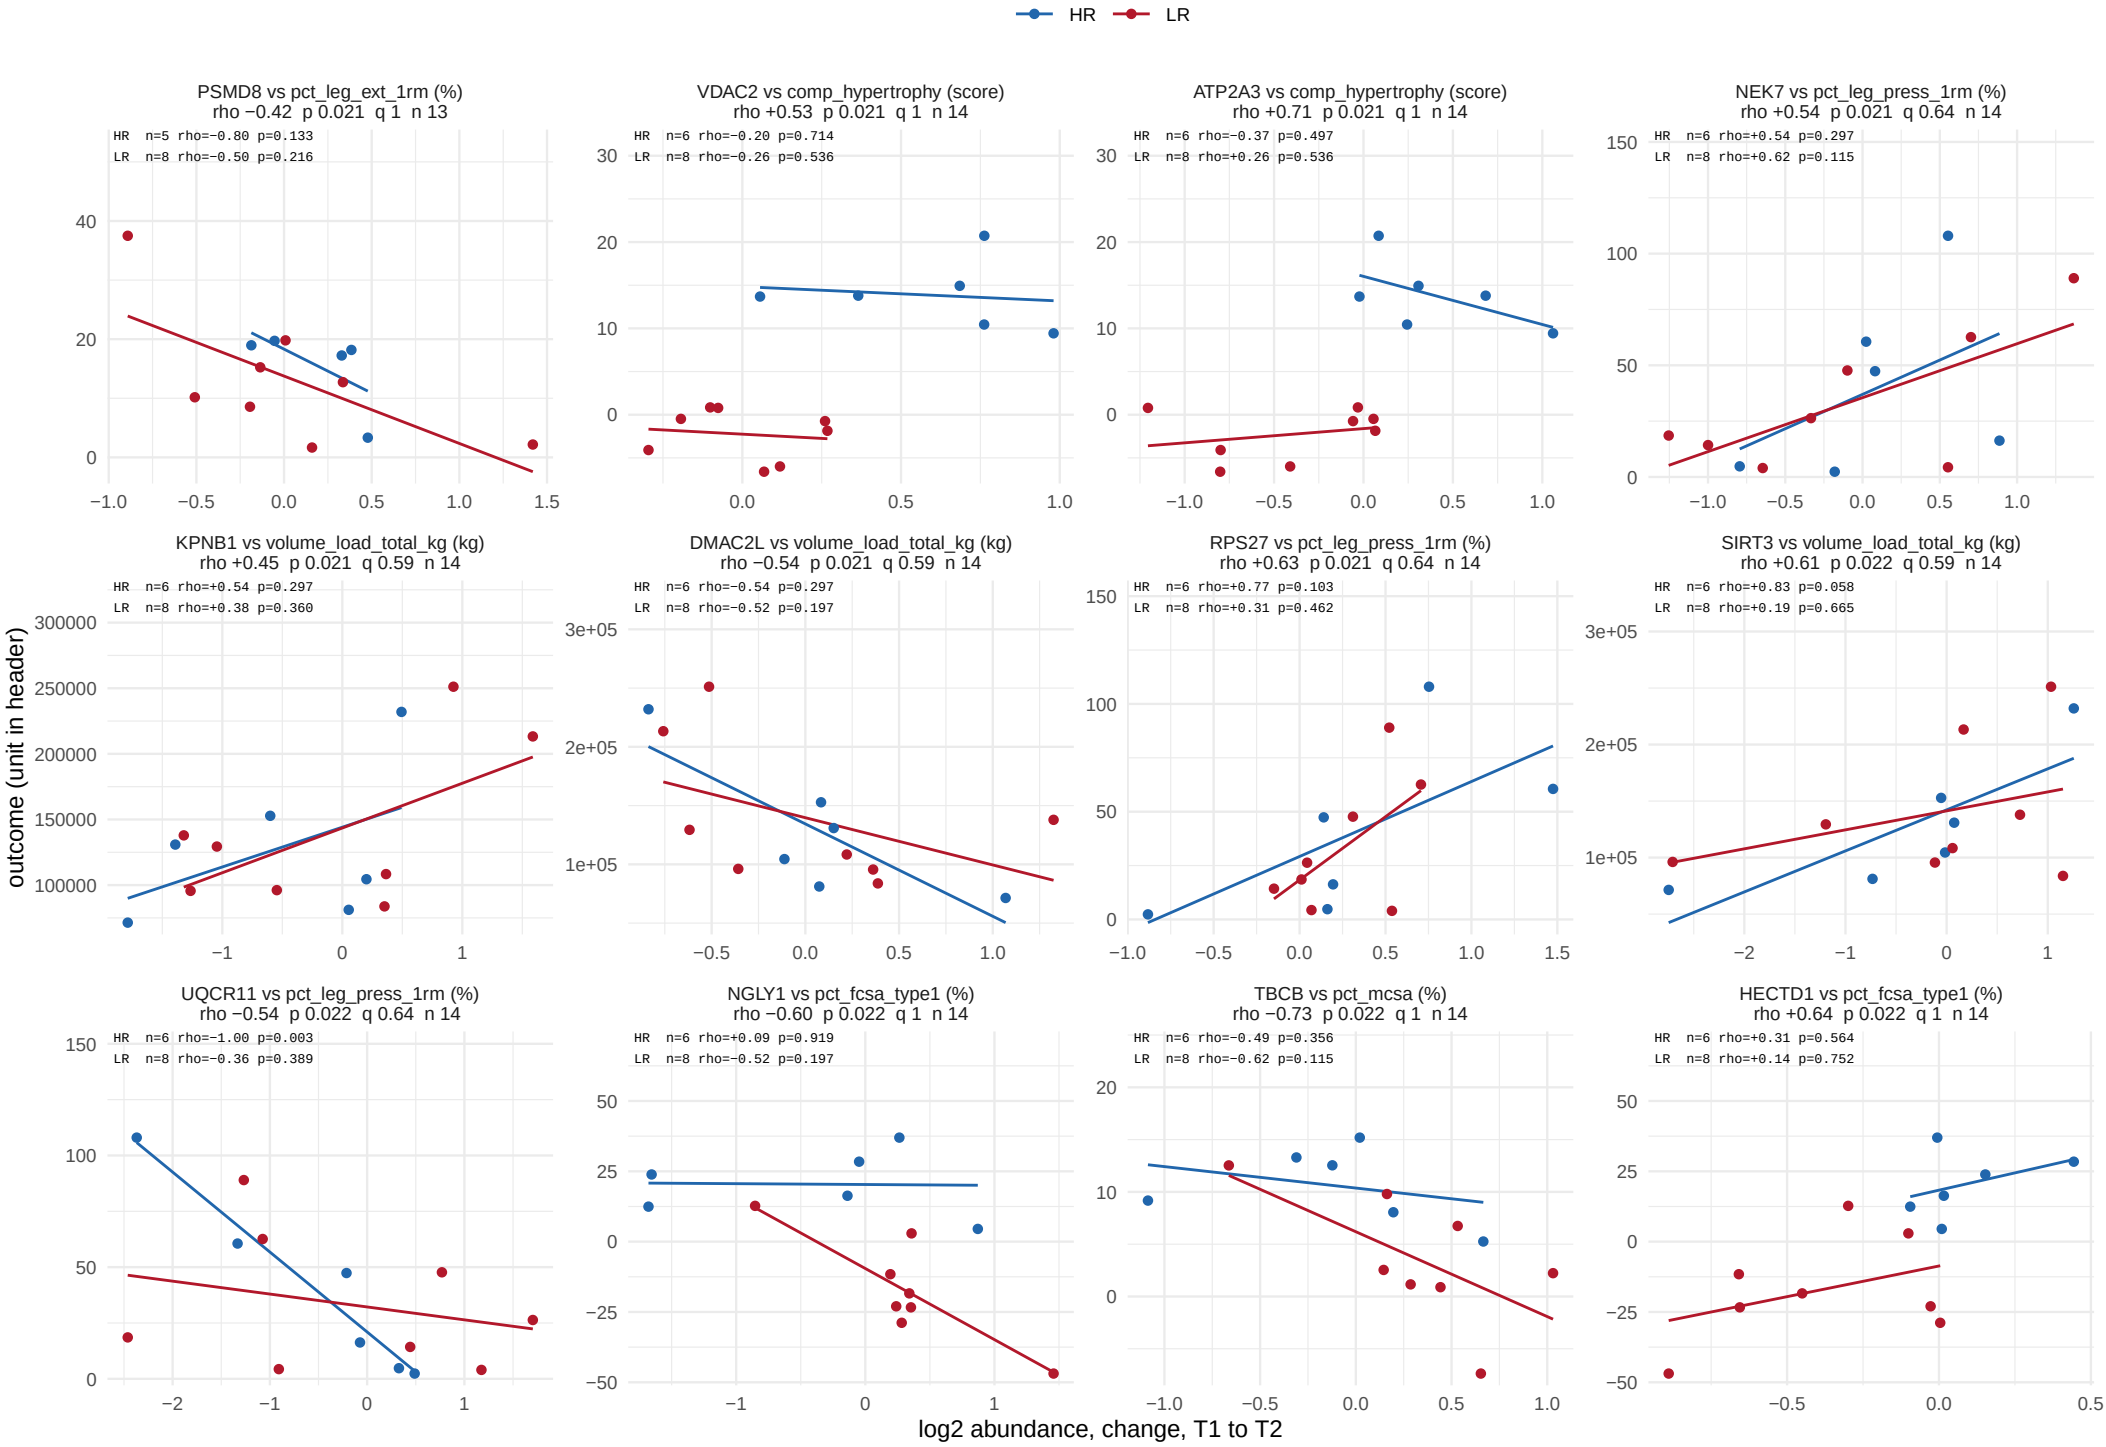

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


628 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 22 of 53.

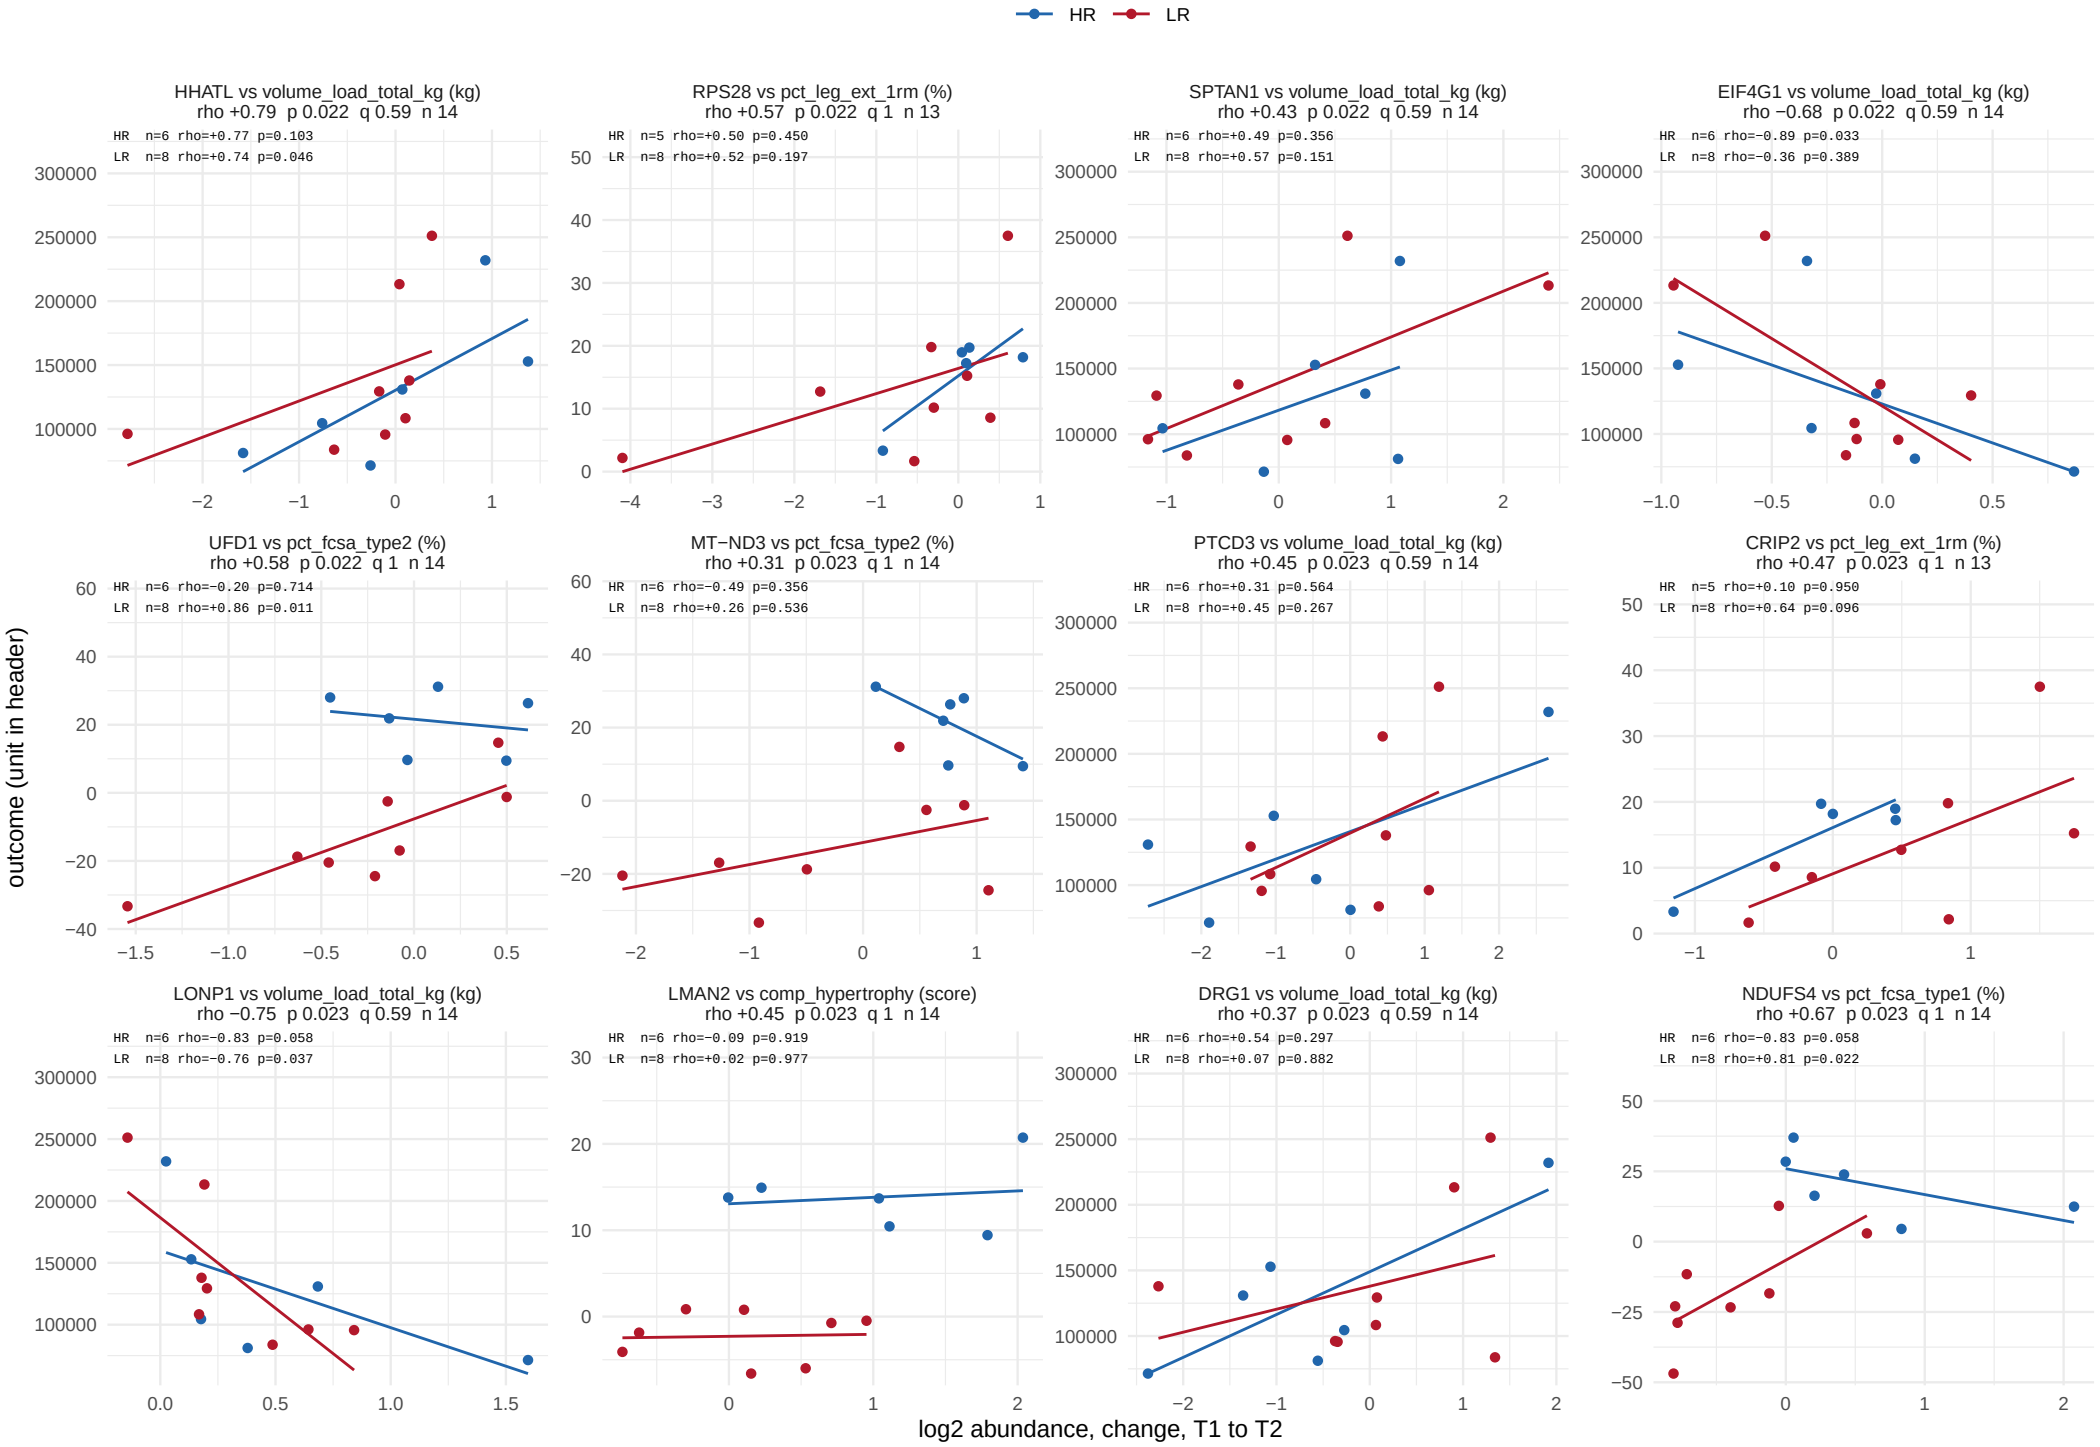

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


628 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 23 of 53.

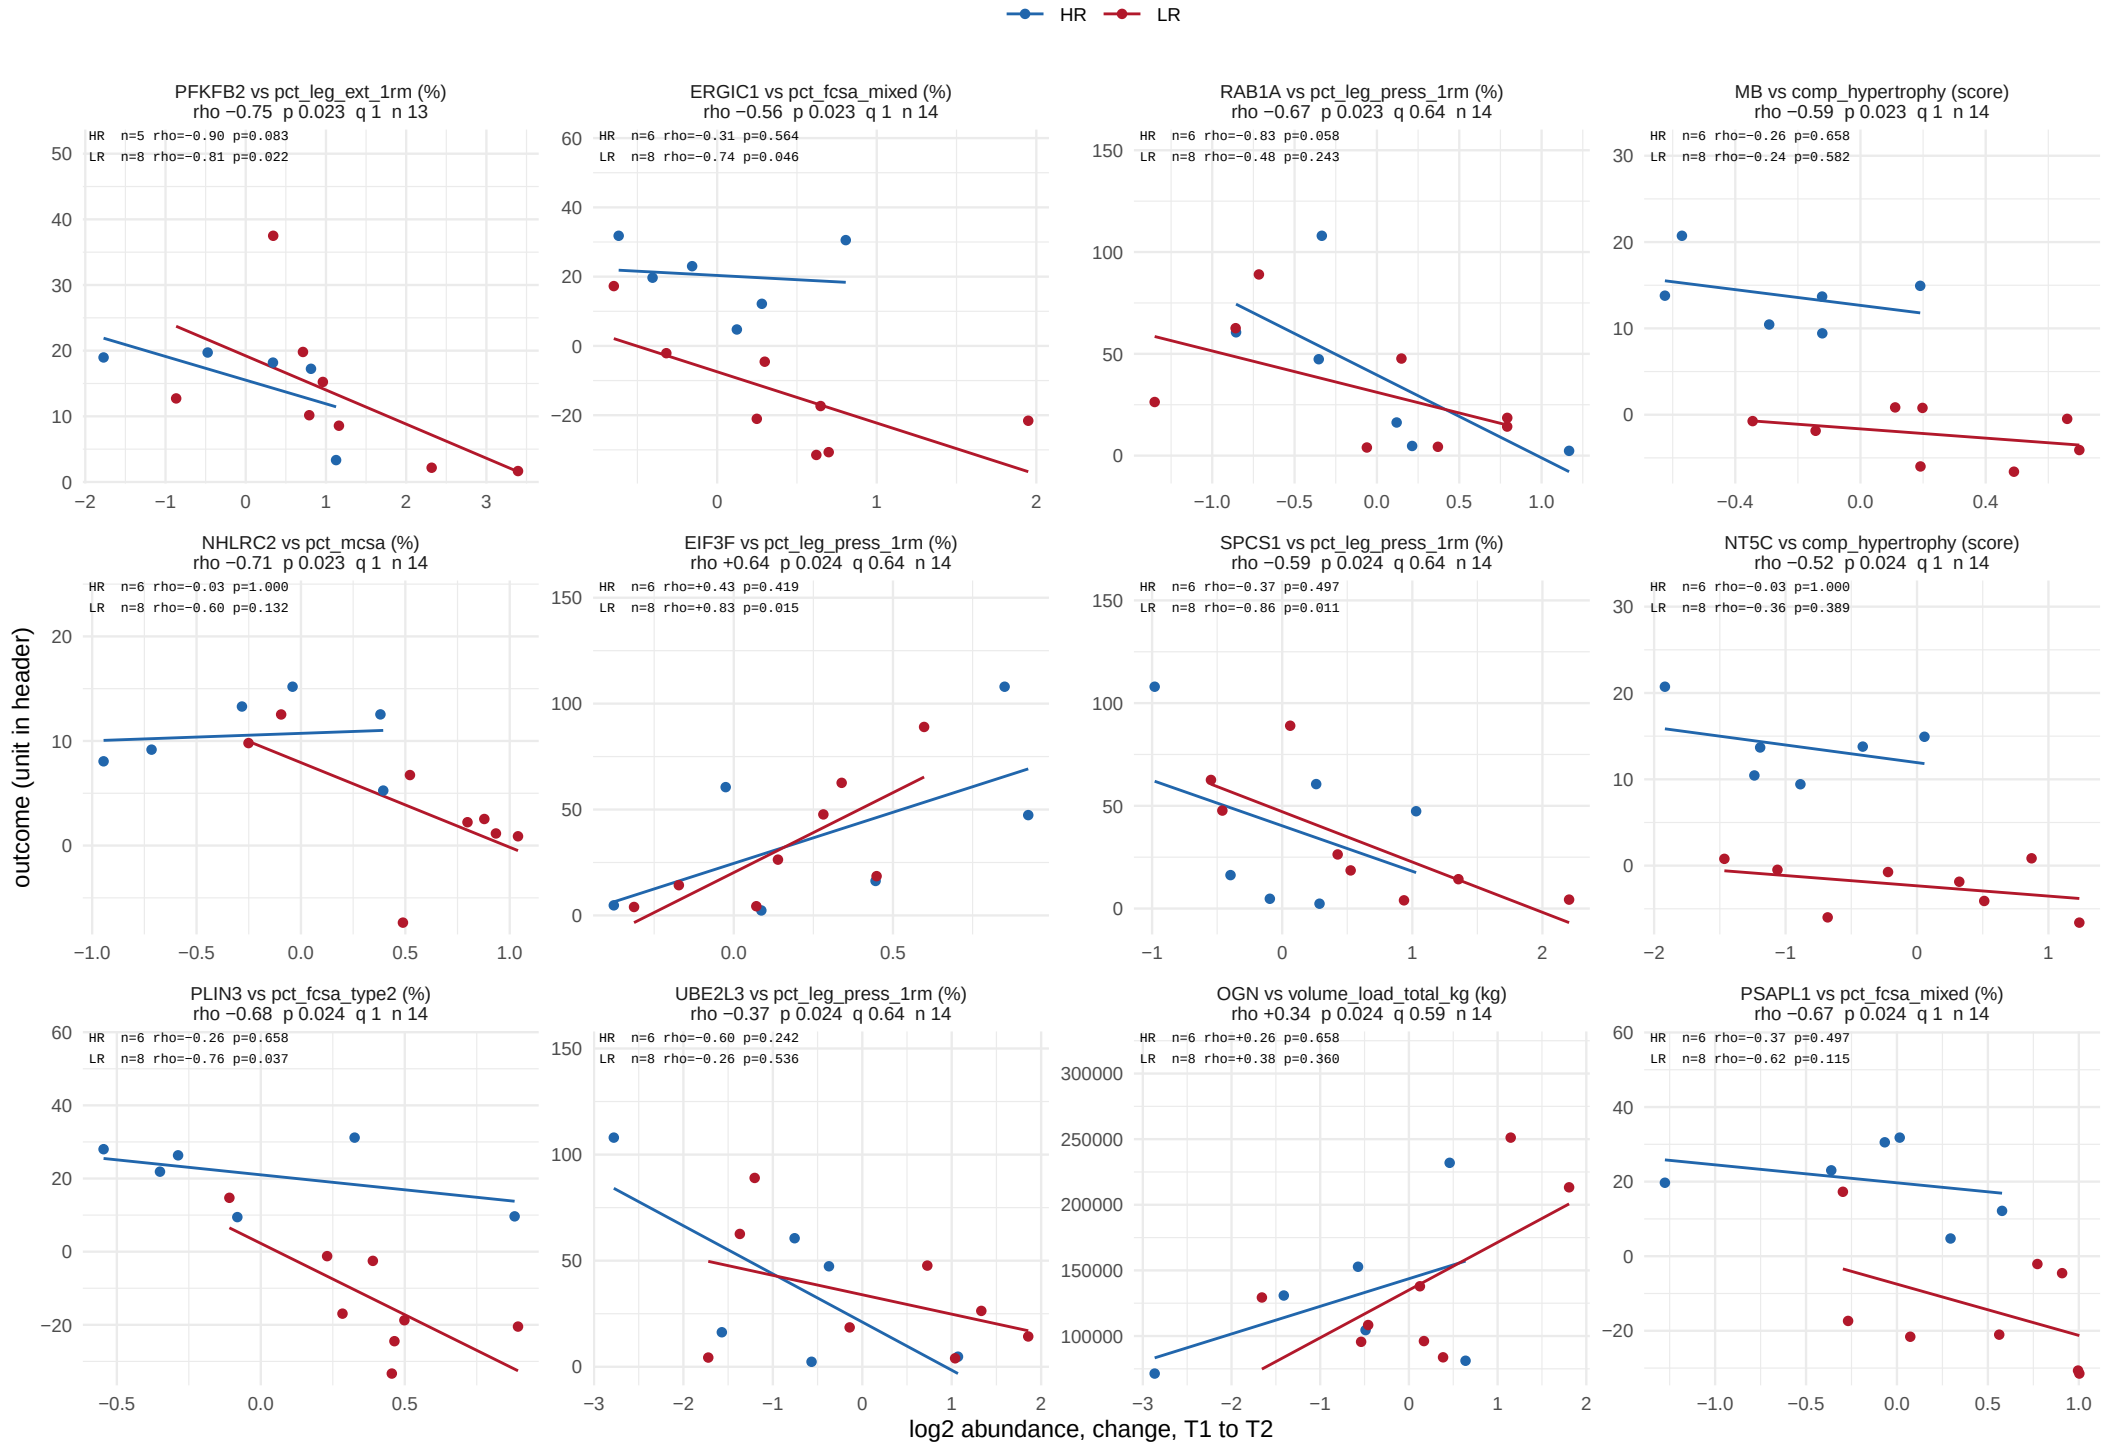

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


628 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 24 of 53.

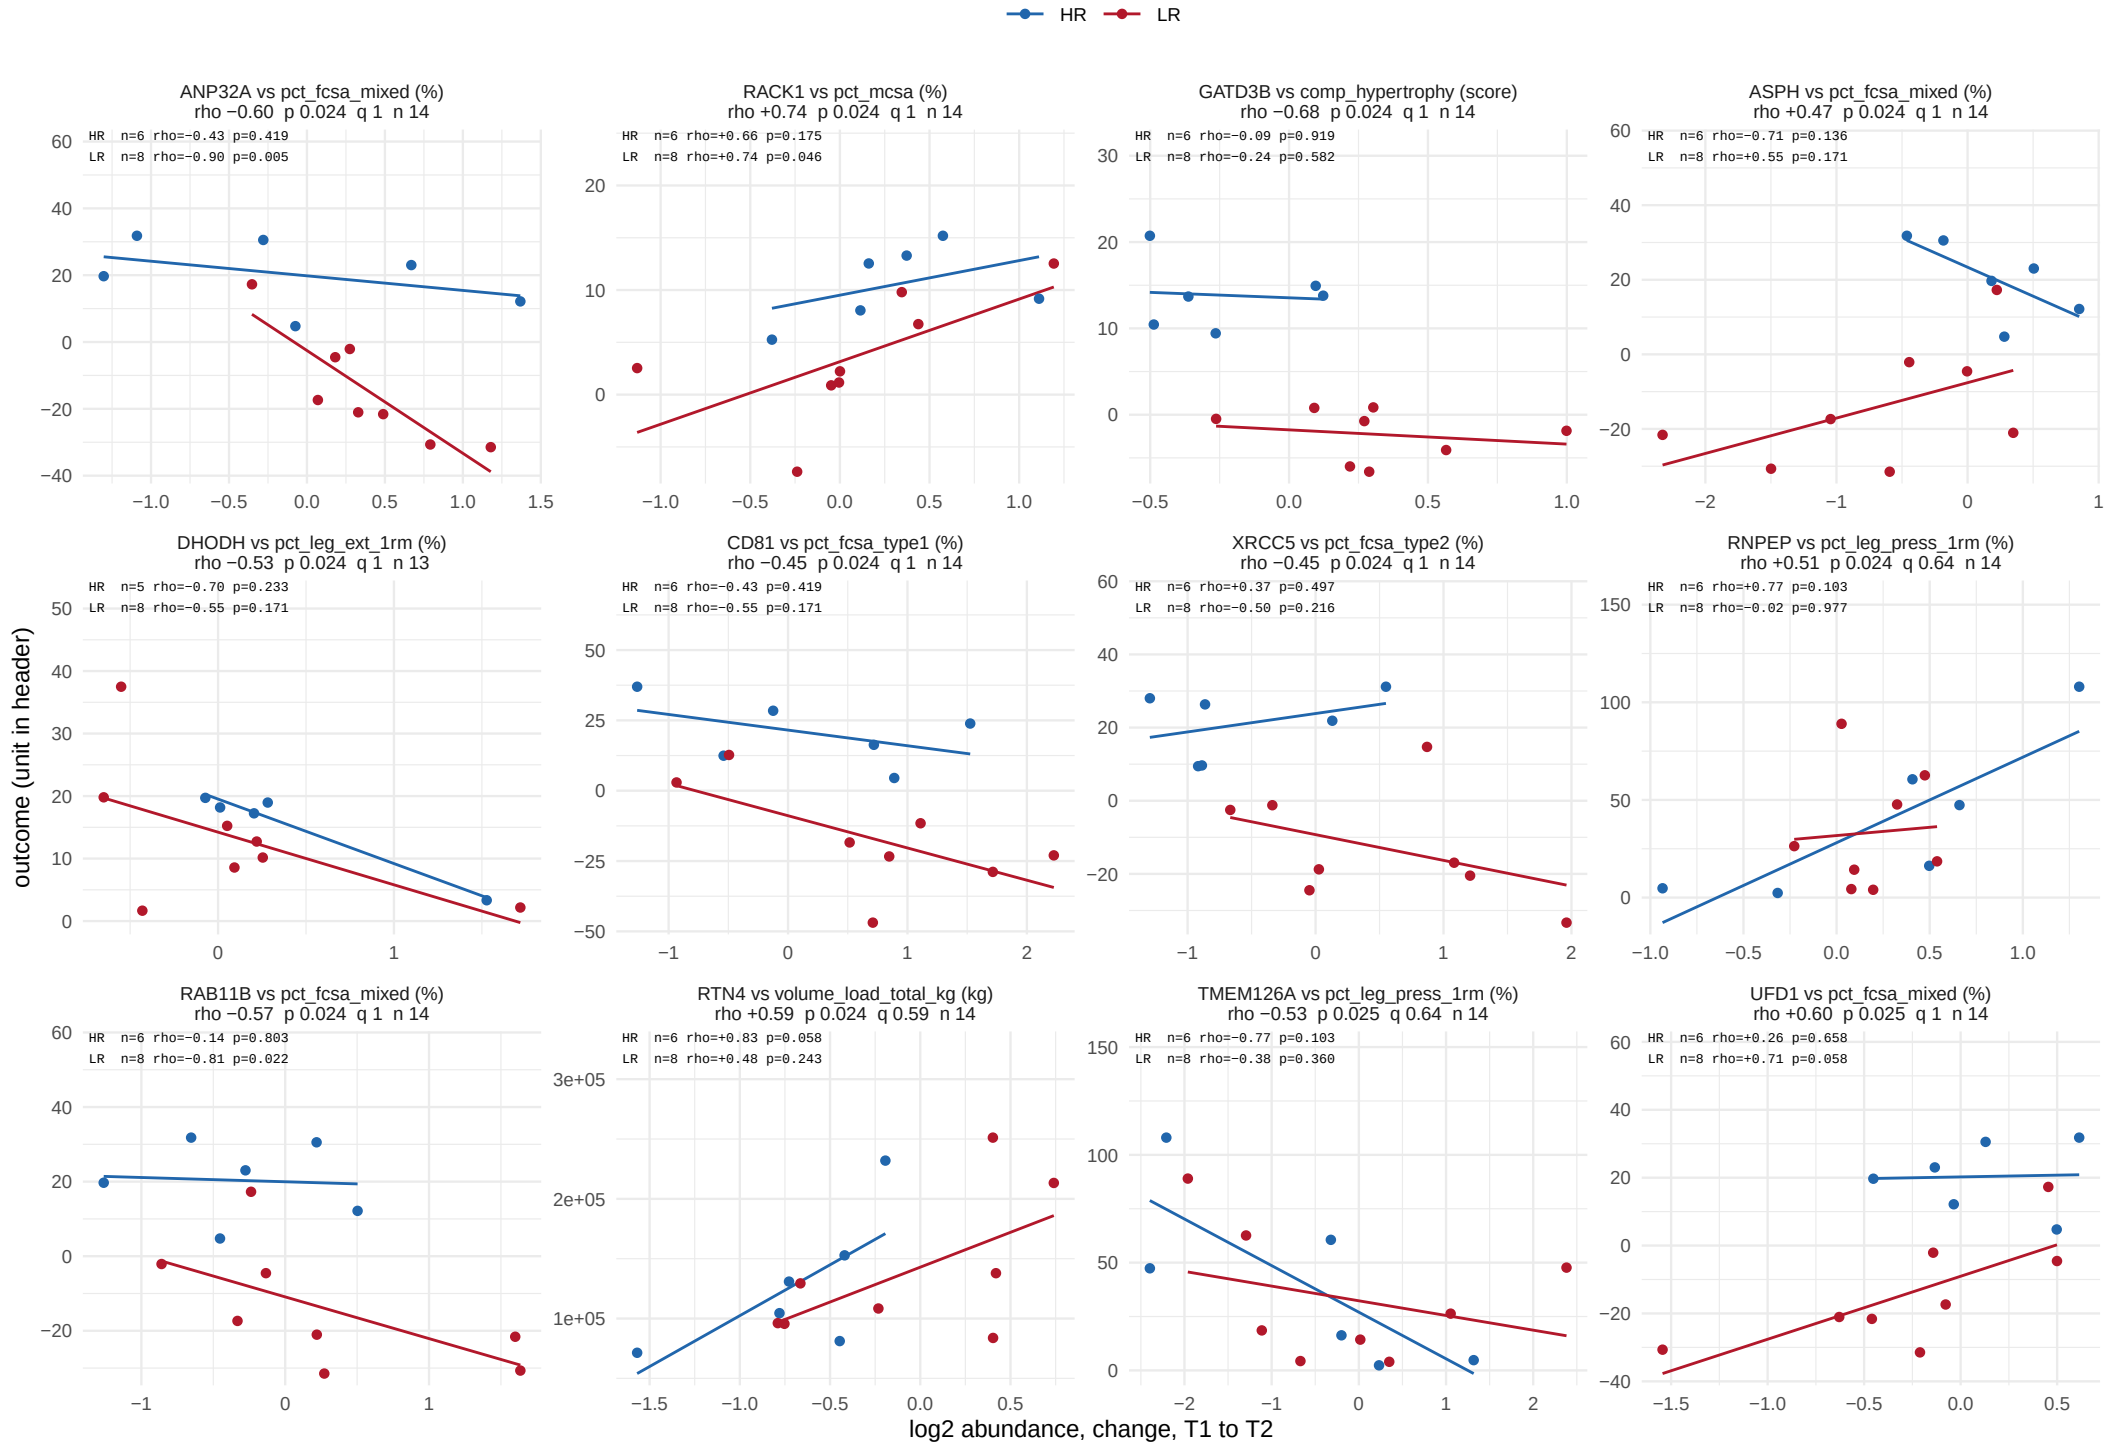

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


628 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 25 of 53.

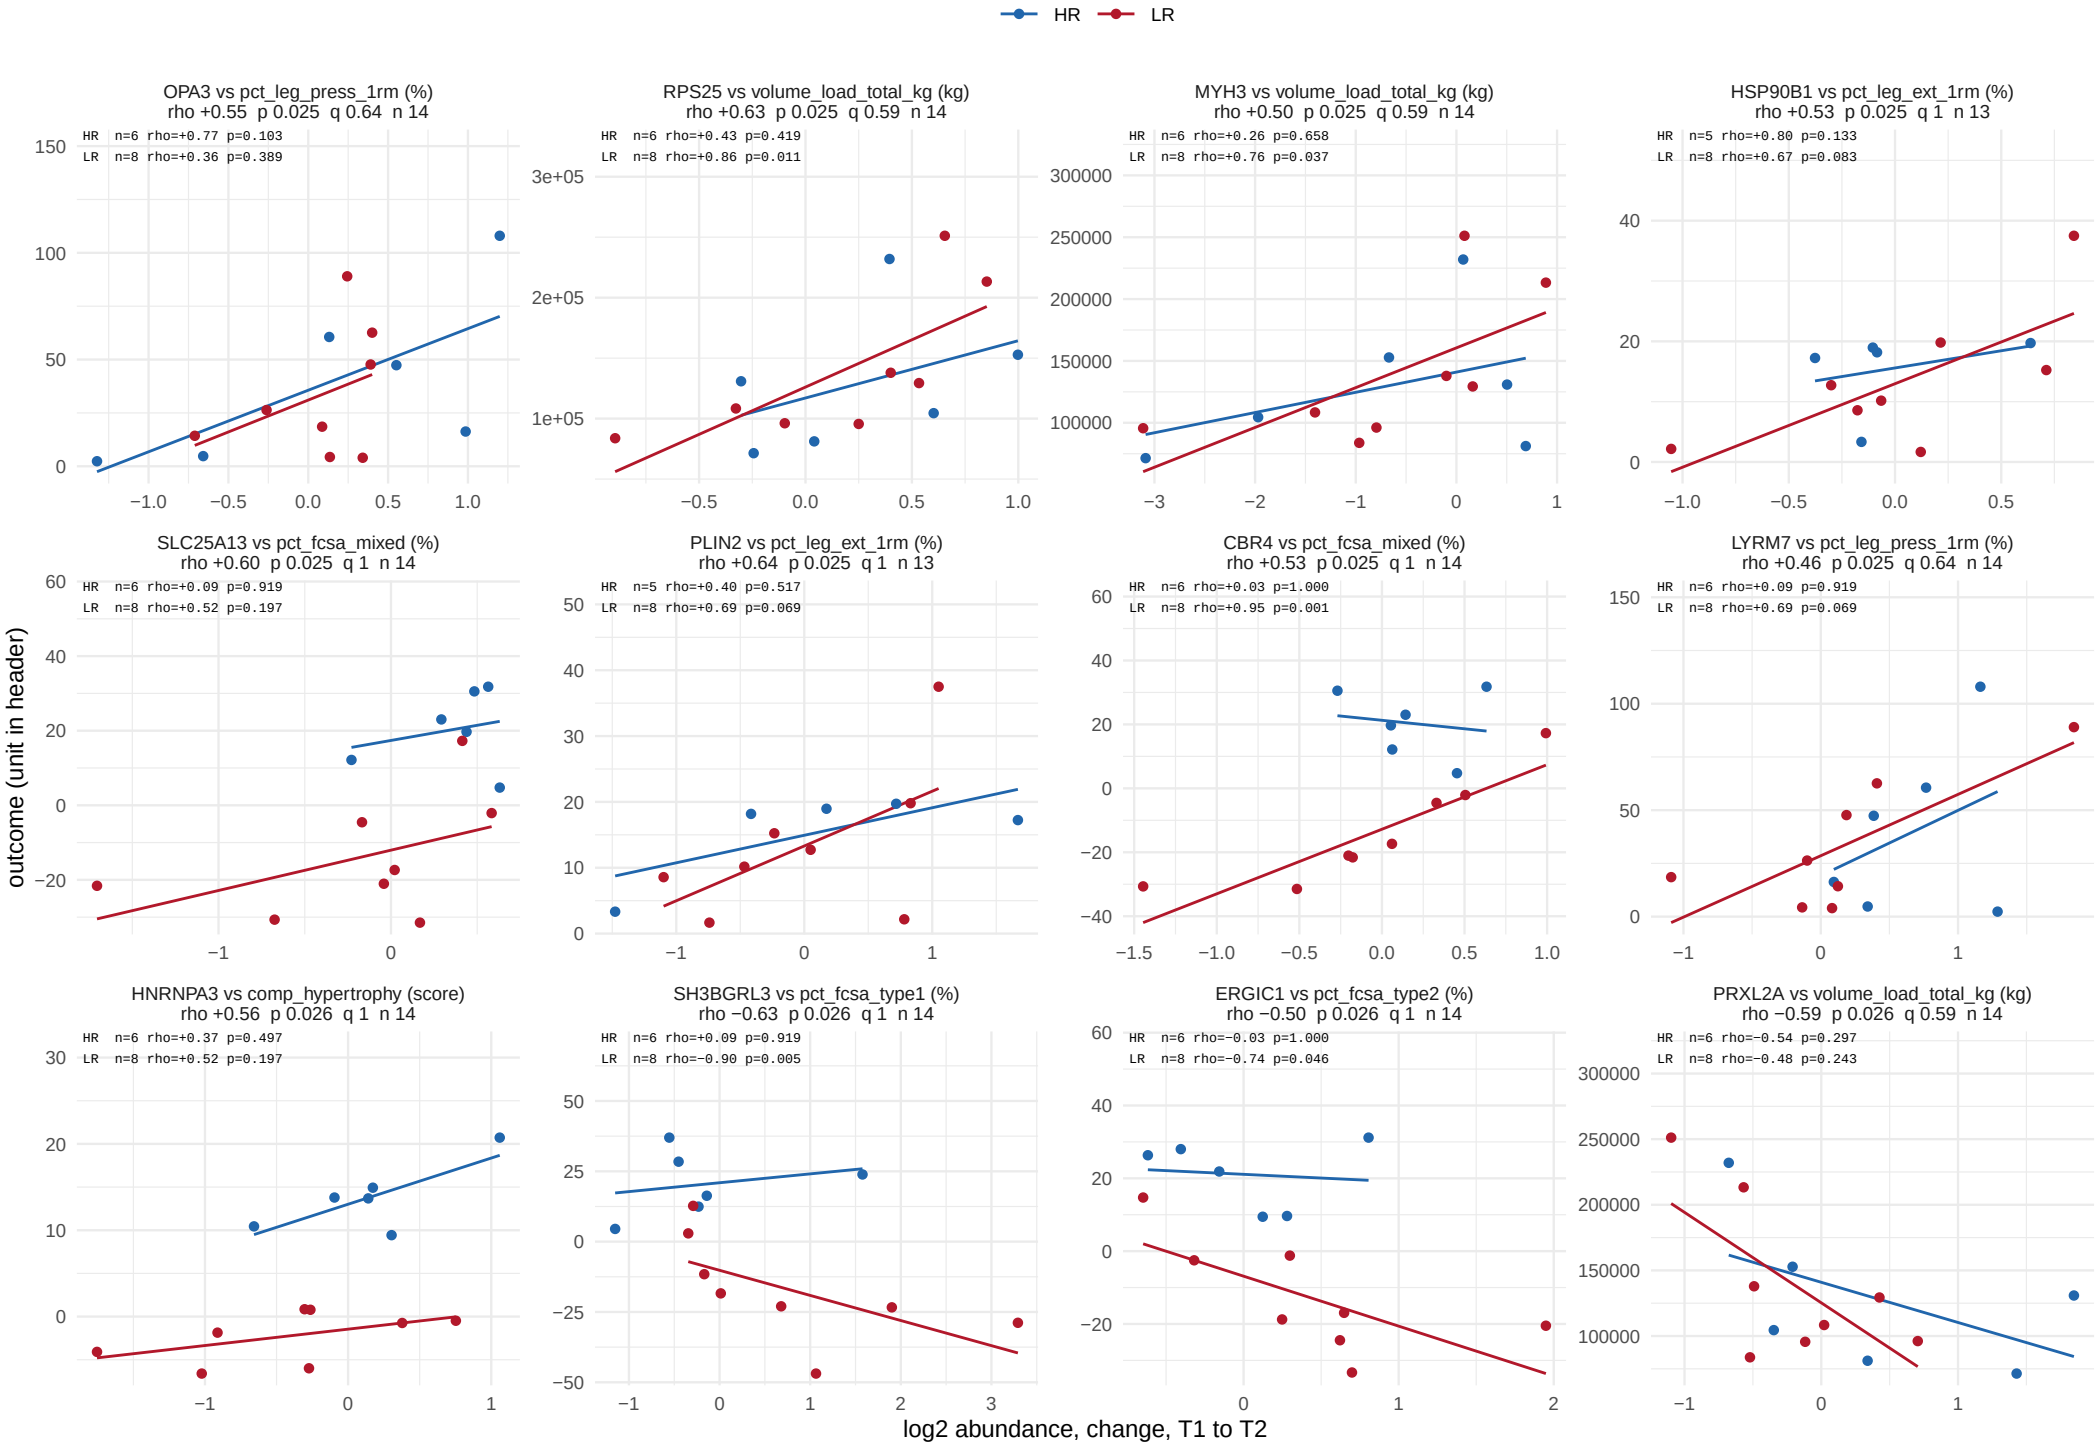

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


628 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 26 of 53.

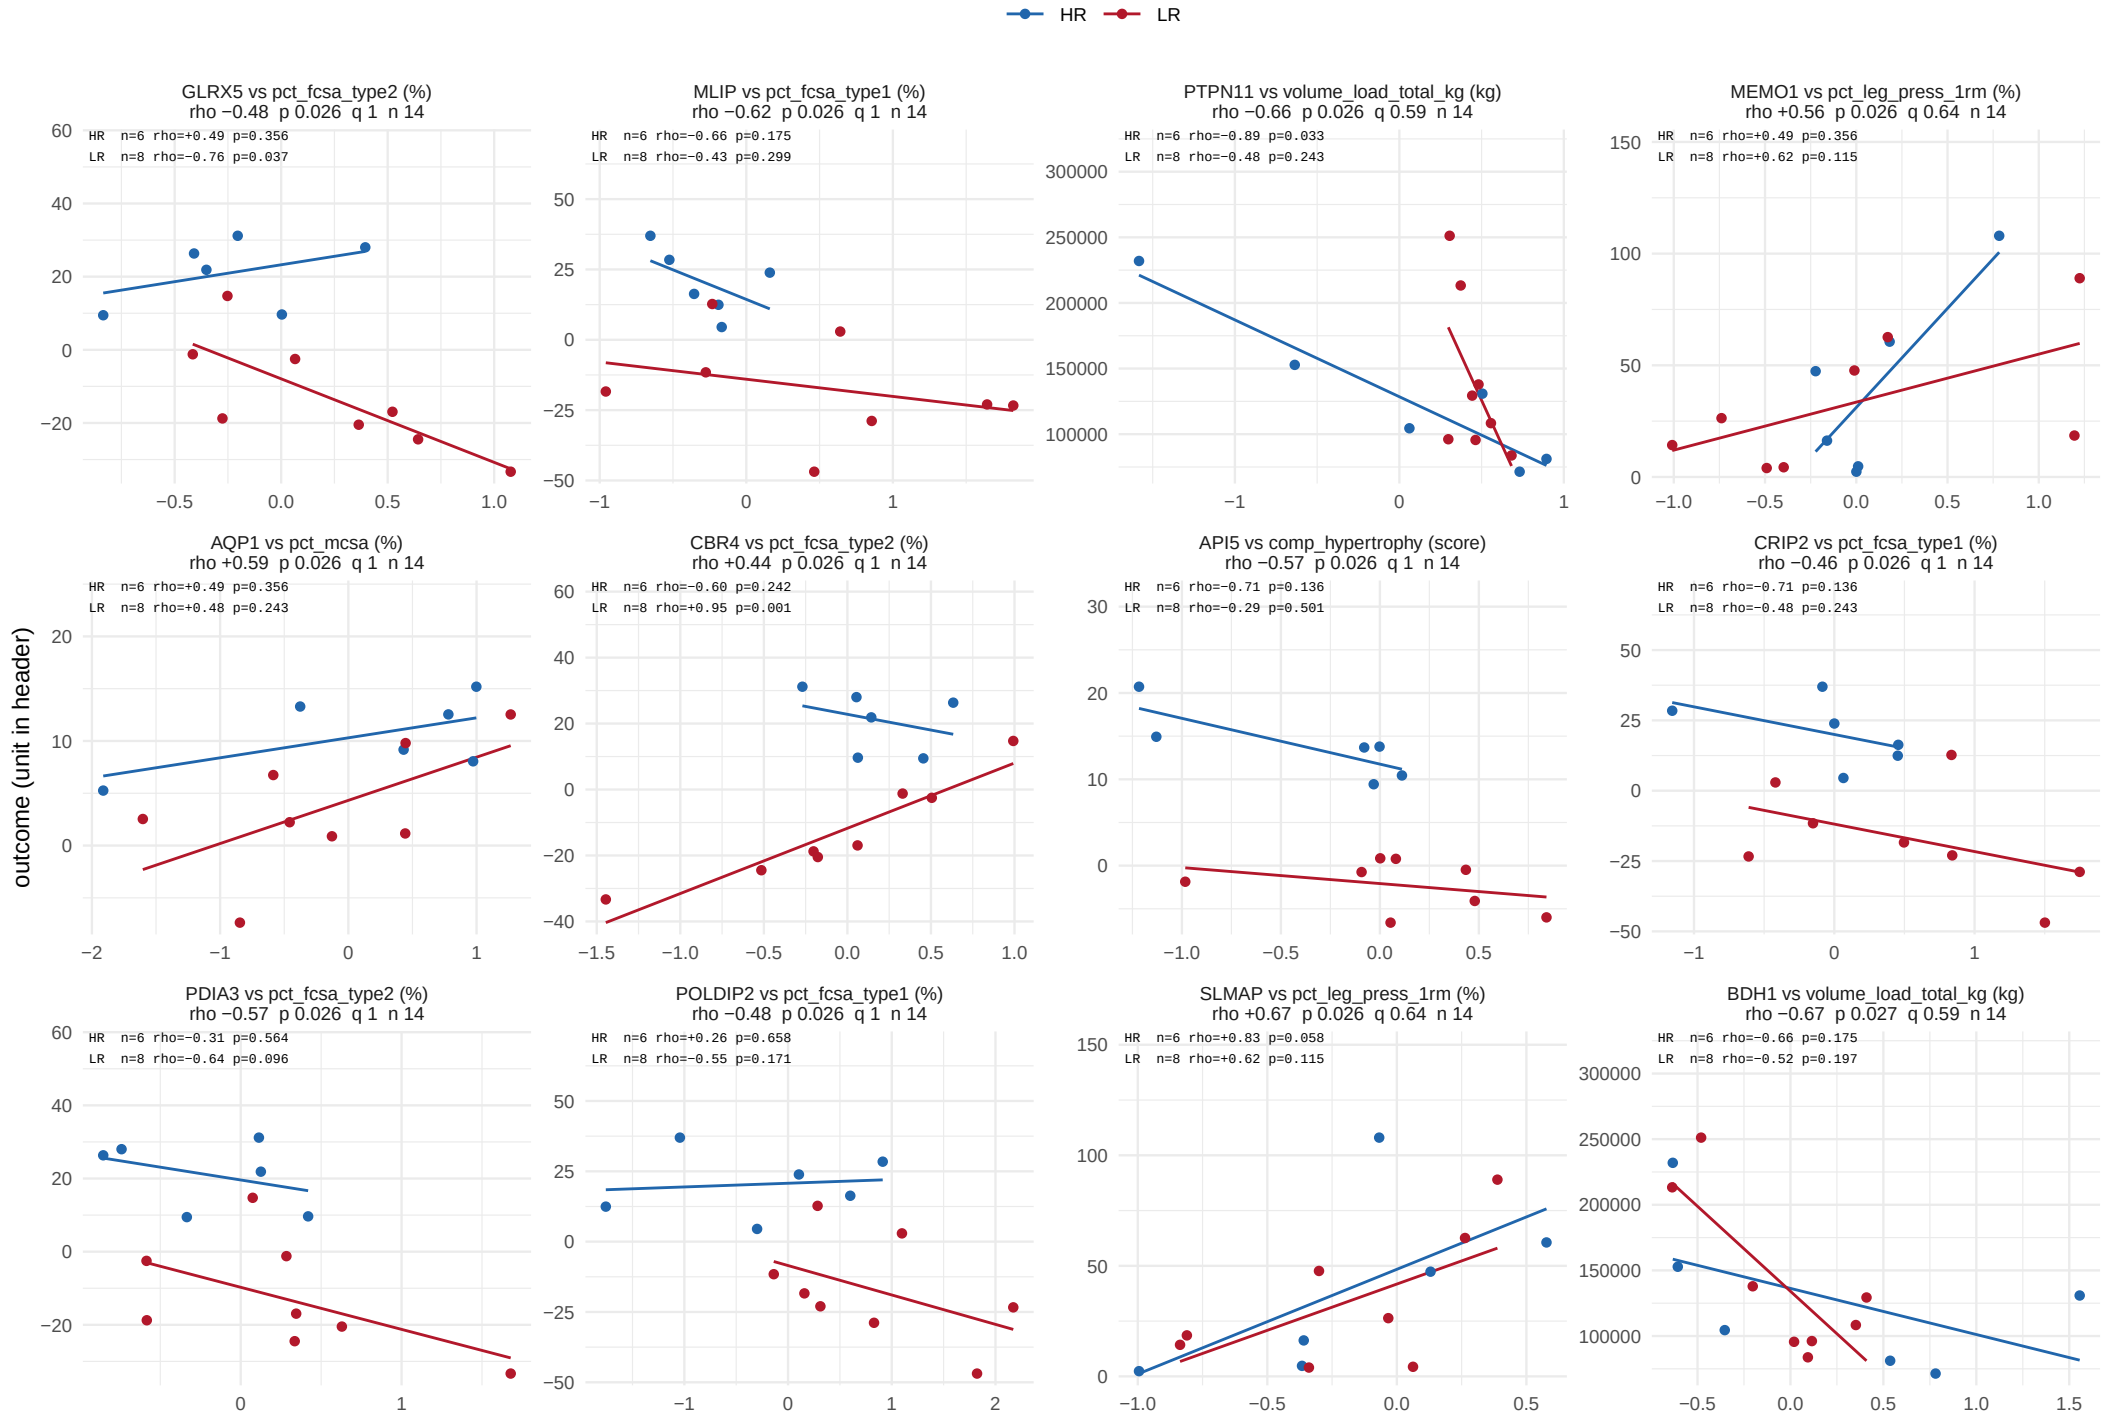

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window

628 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 27 of 53.

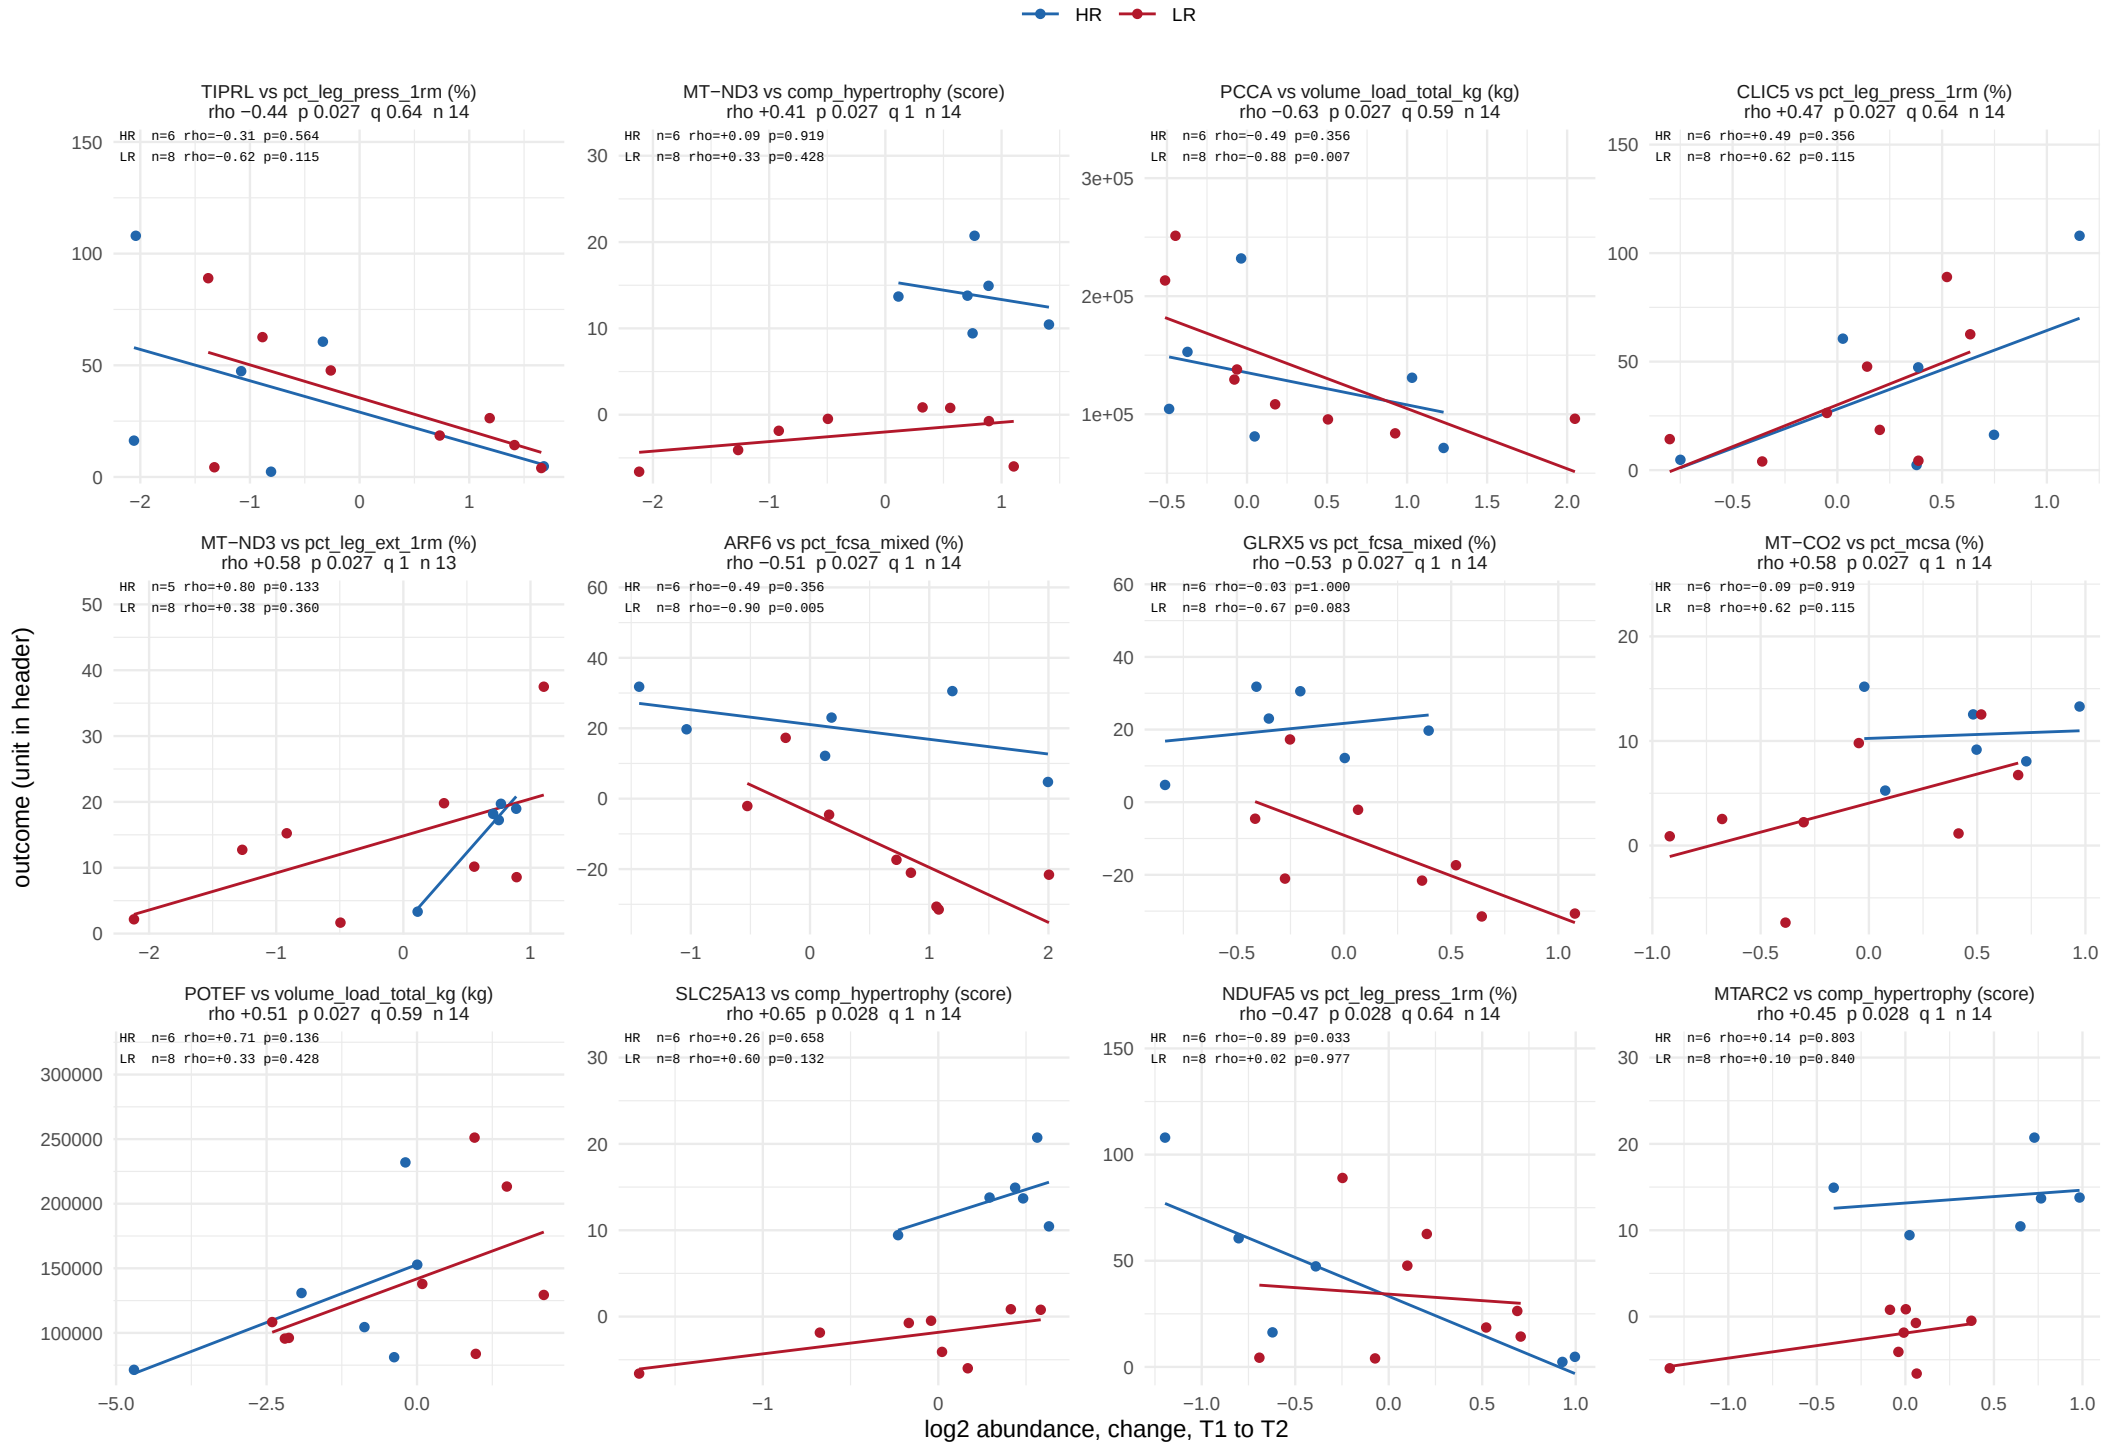

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


628 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 28 of 53.



One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


628 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 29 of 53.

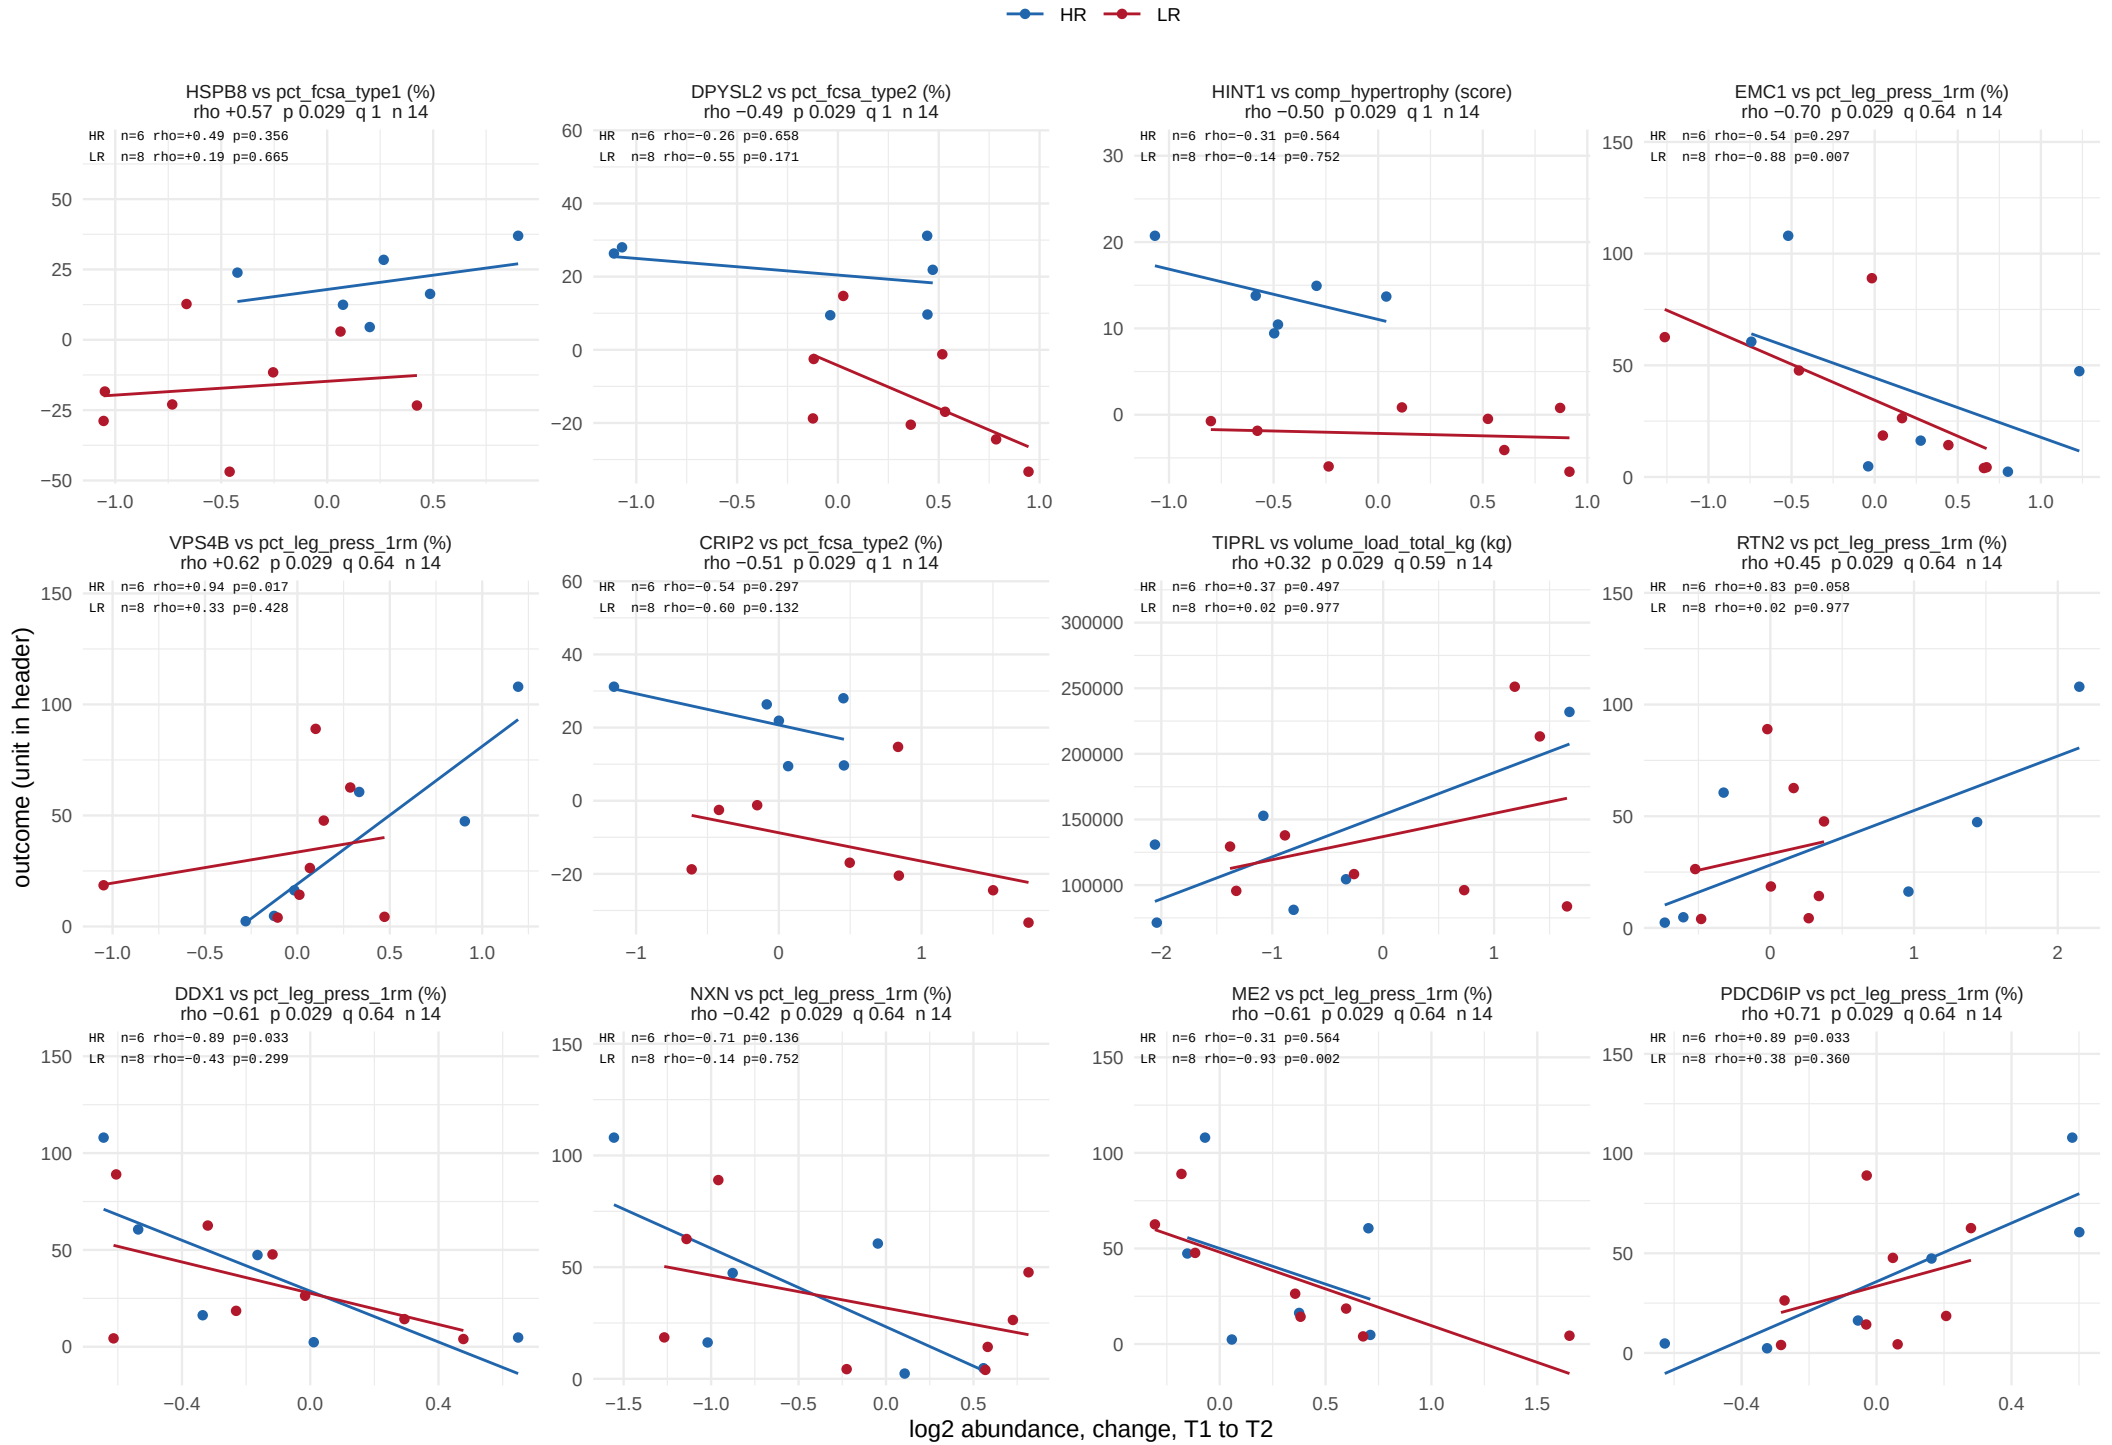

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


628 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 30 of 53.

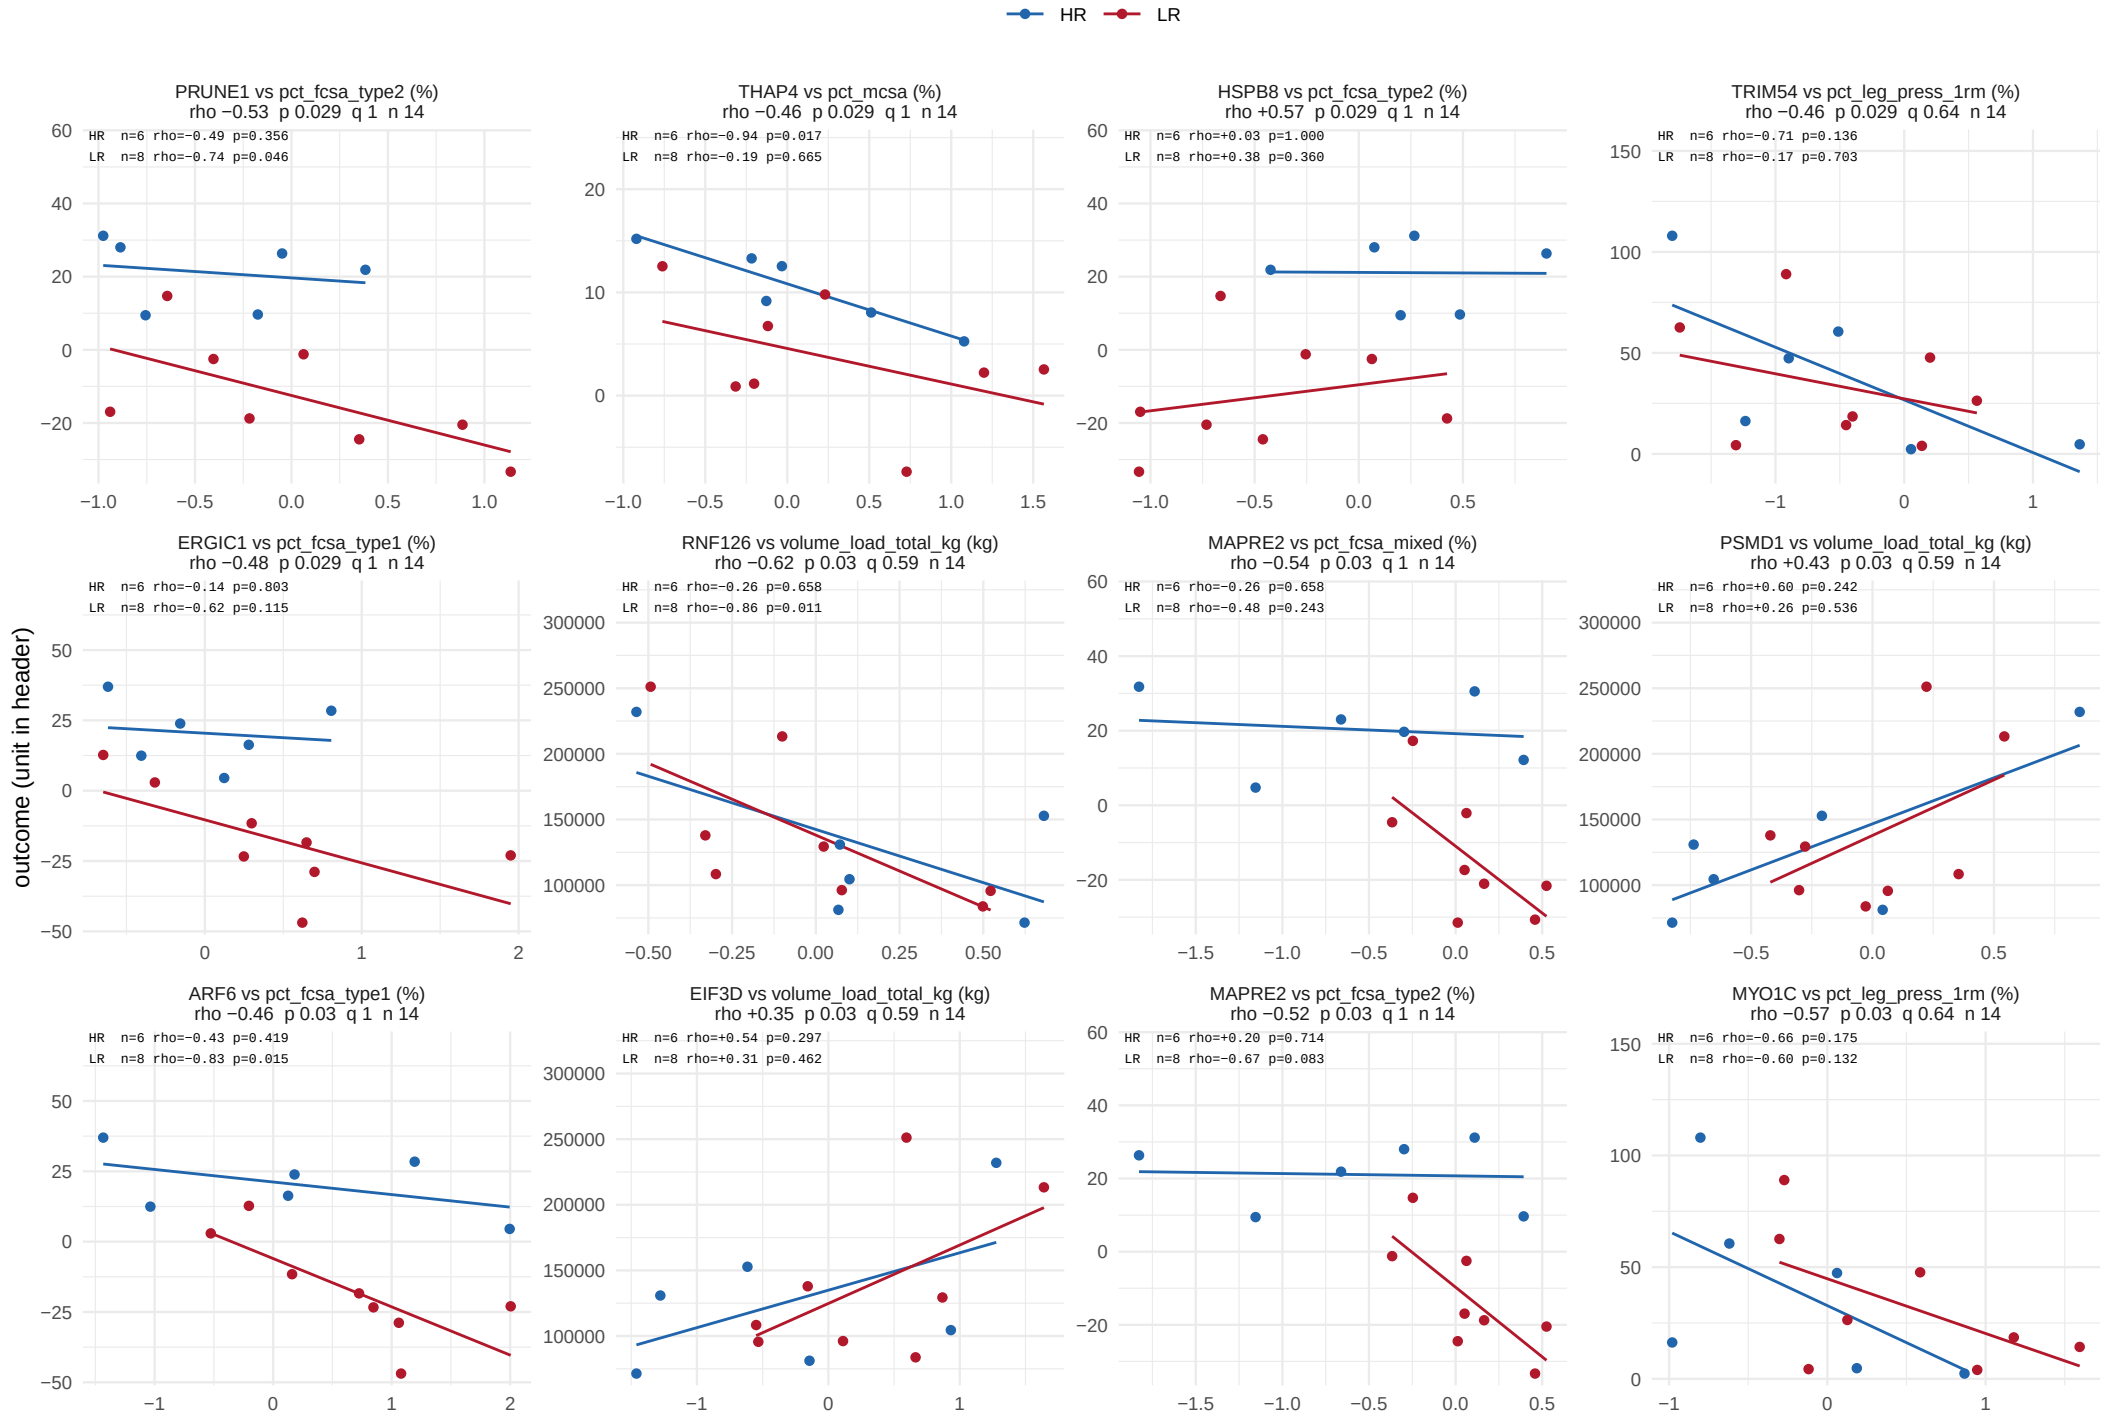

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


628 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 31 of 53.

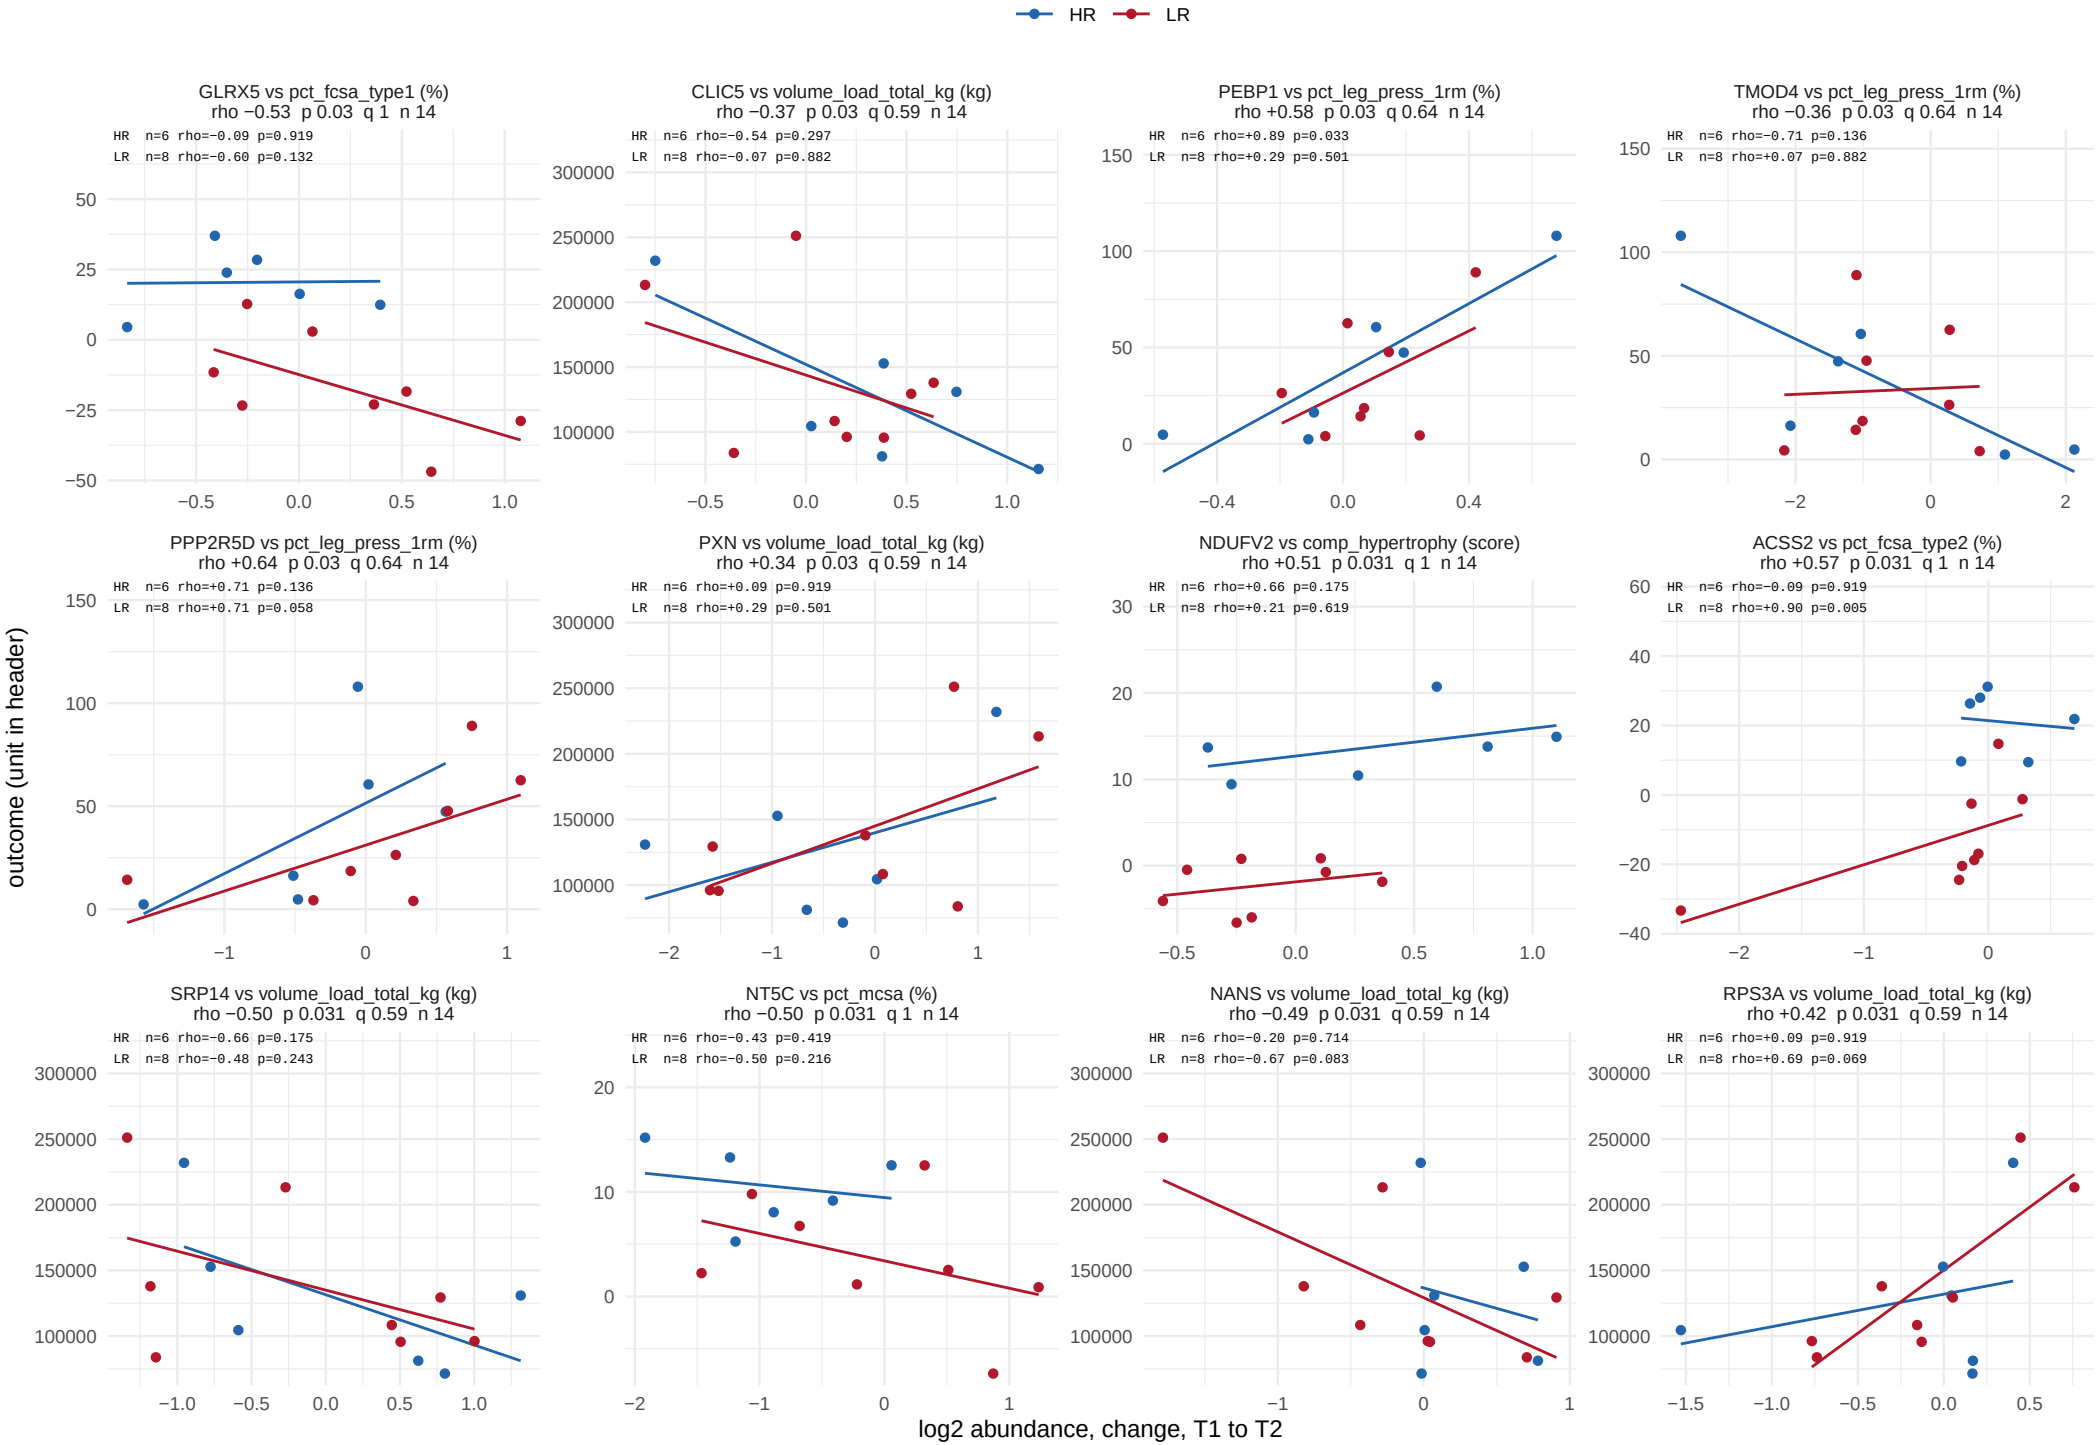

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


628 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 32 of 53.

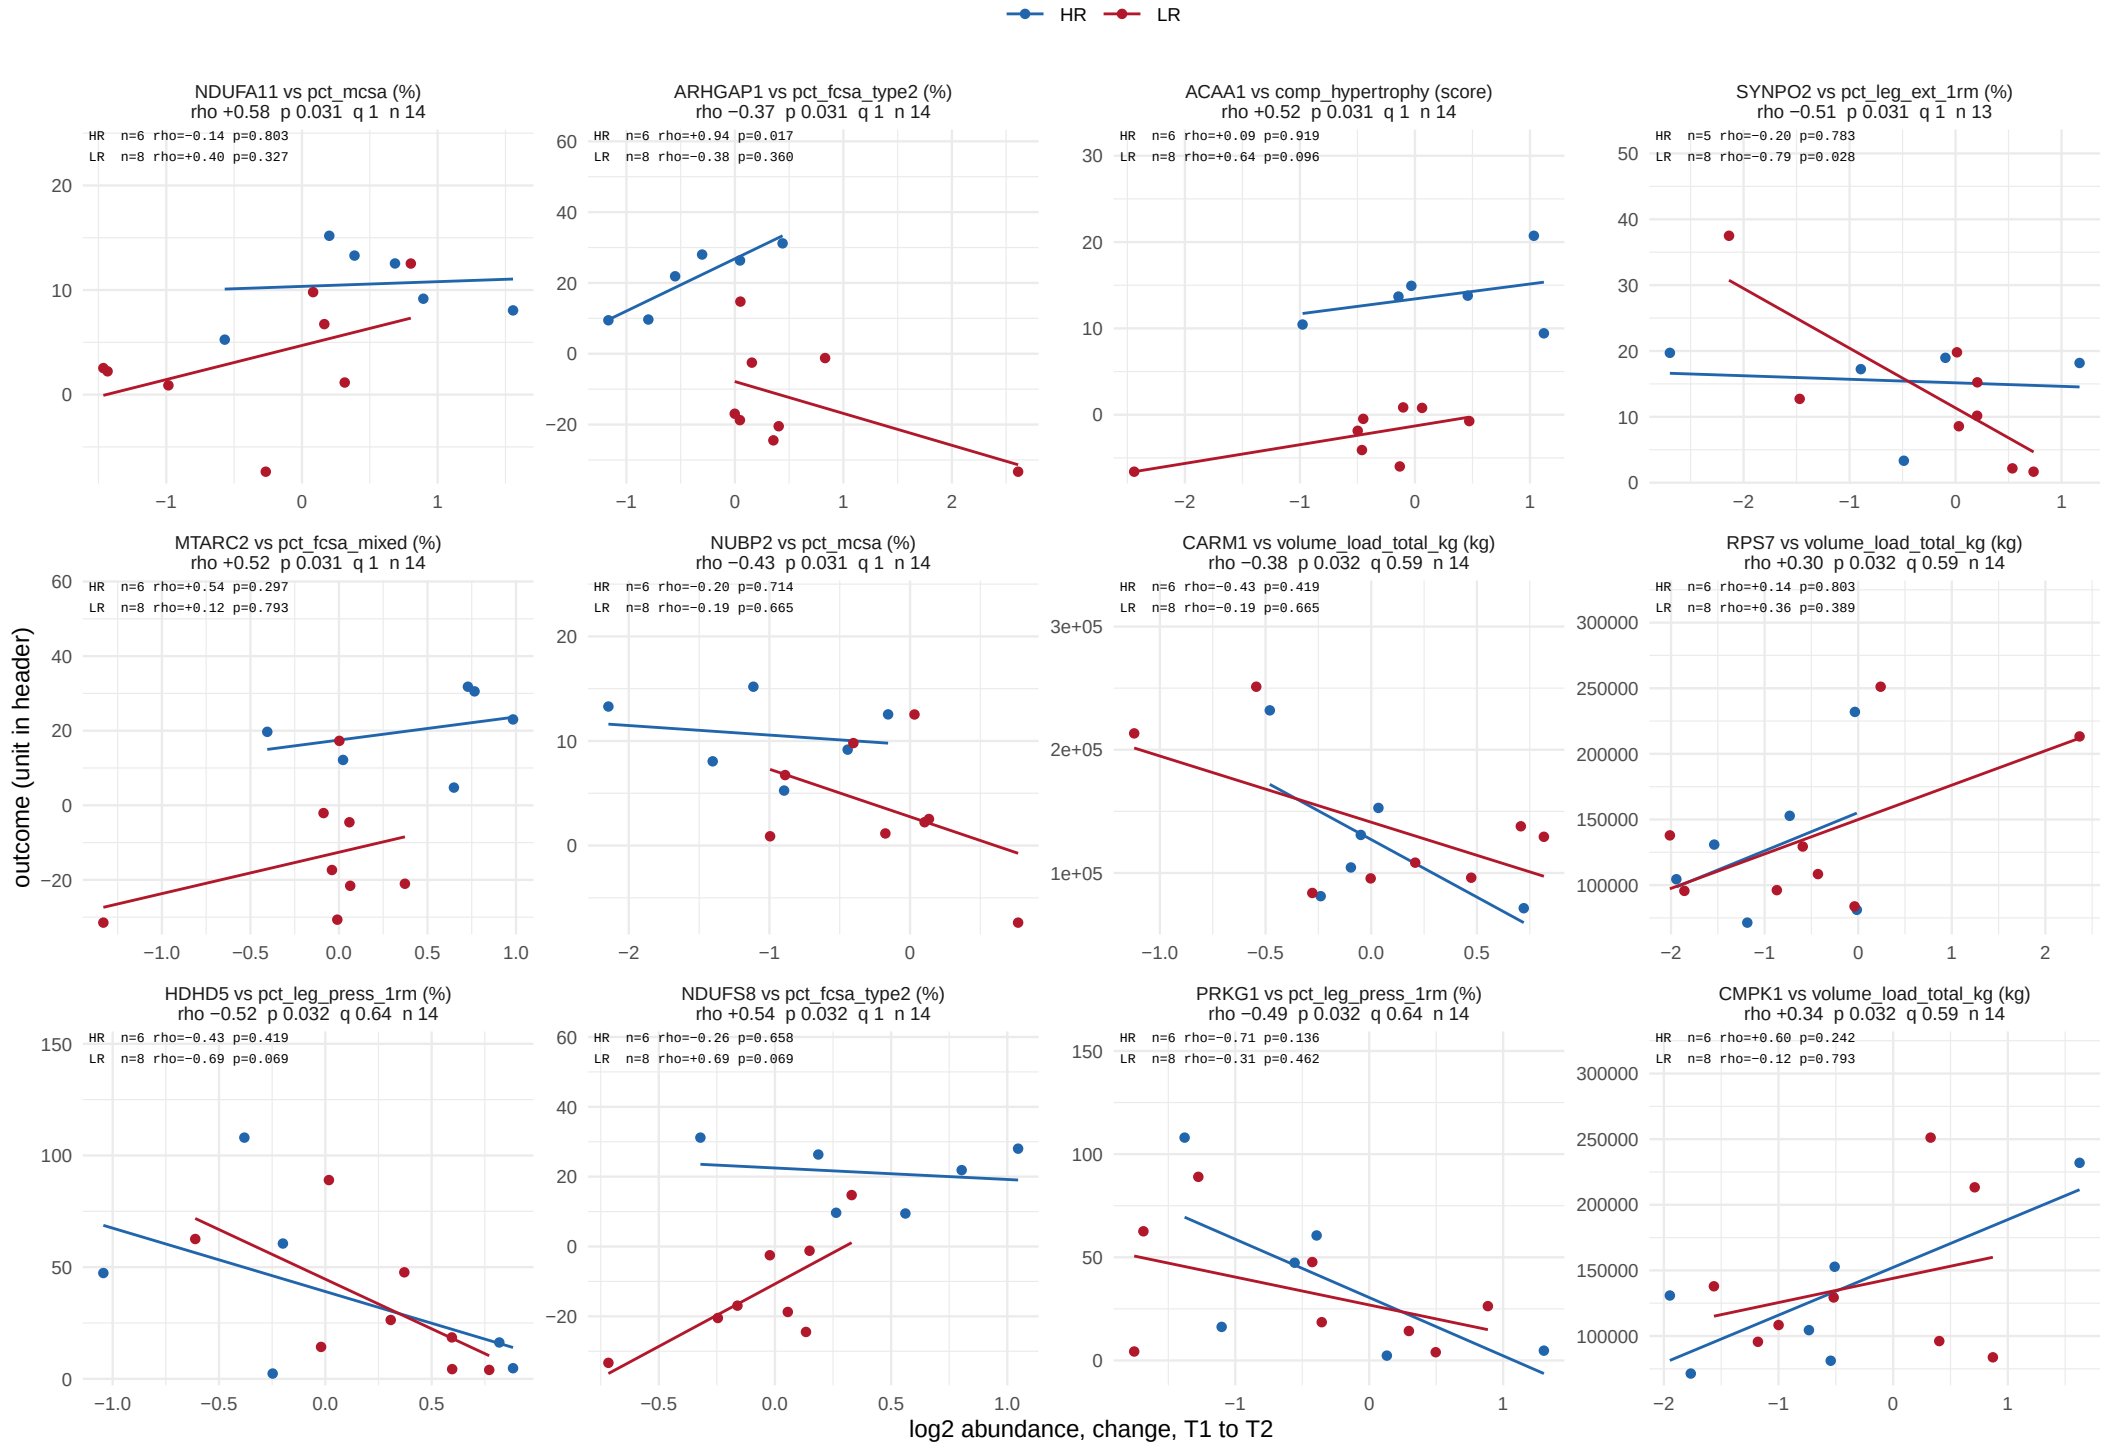

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


628 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 33 of 53.

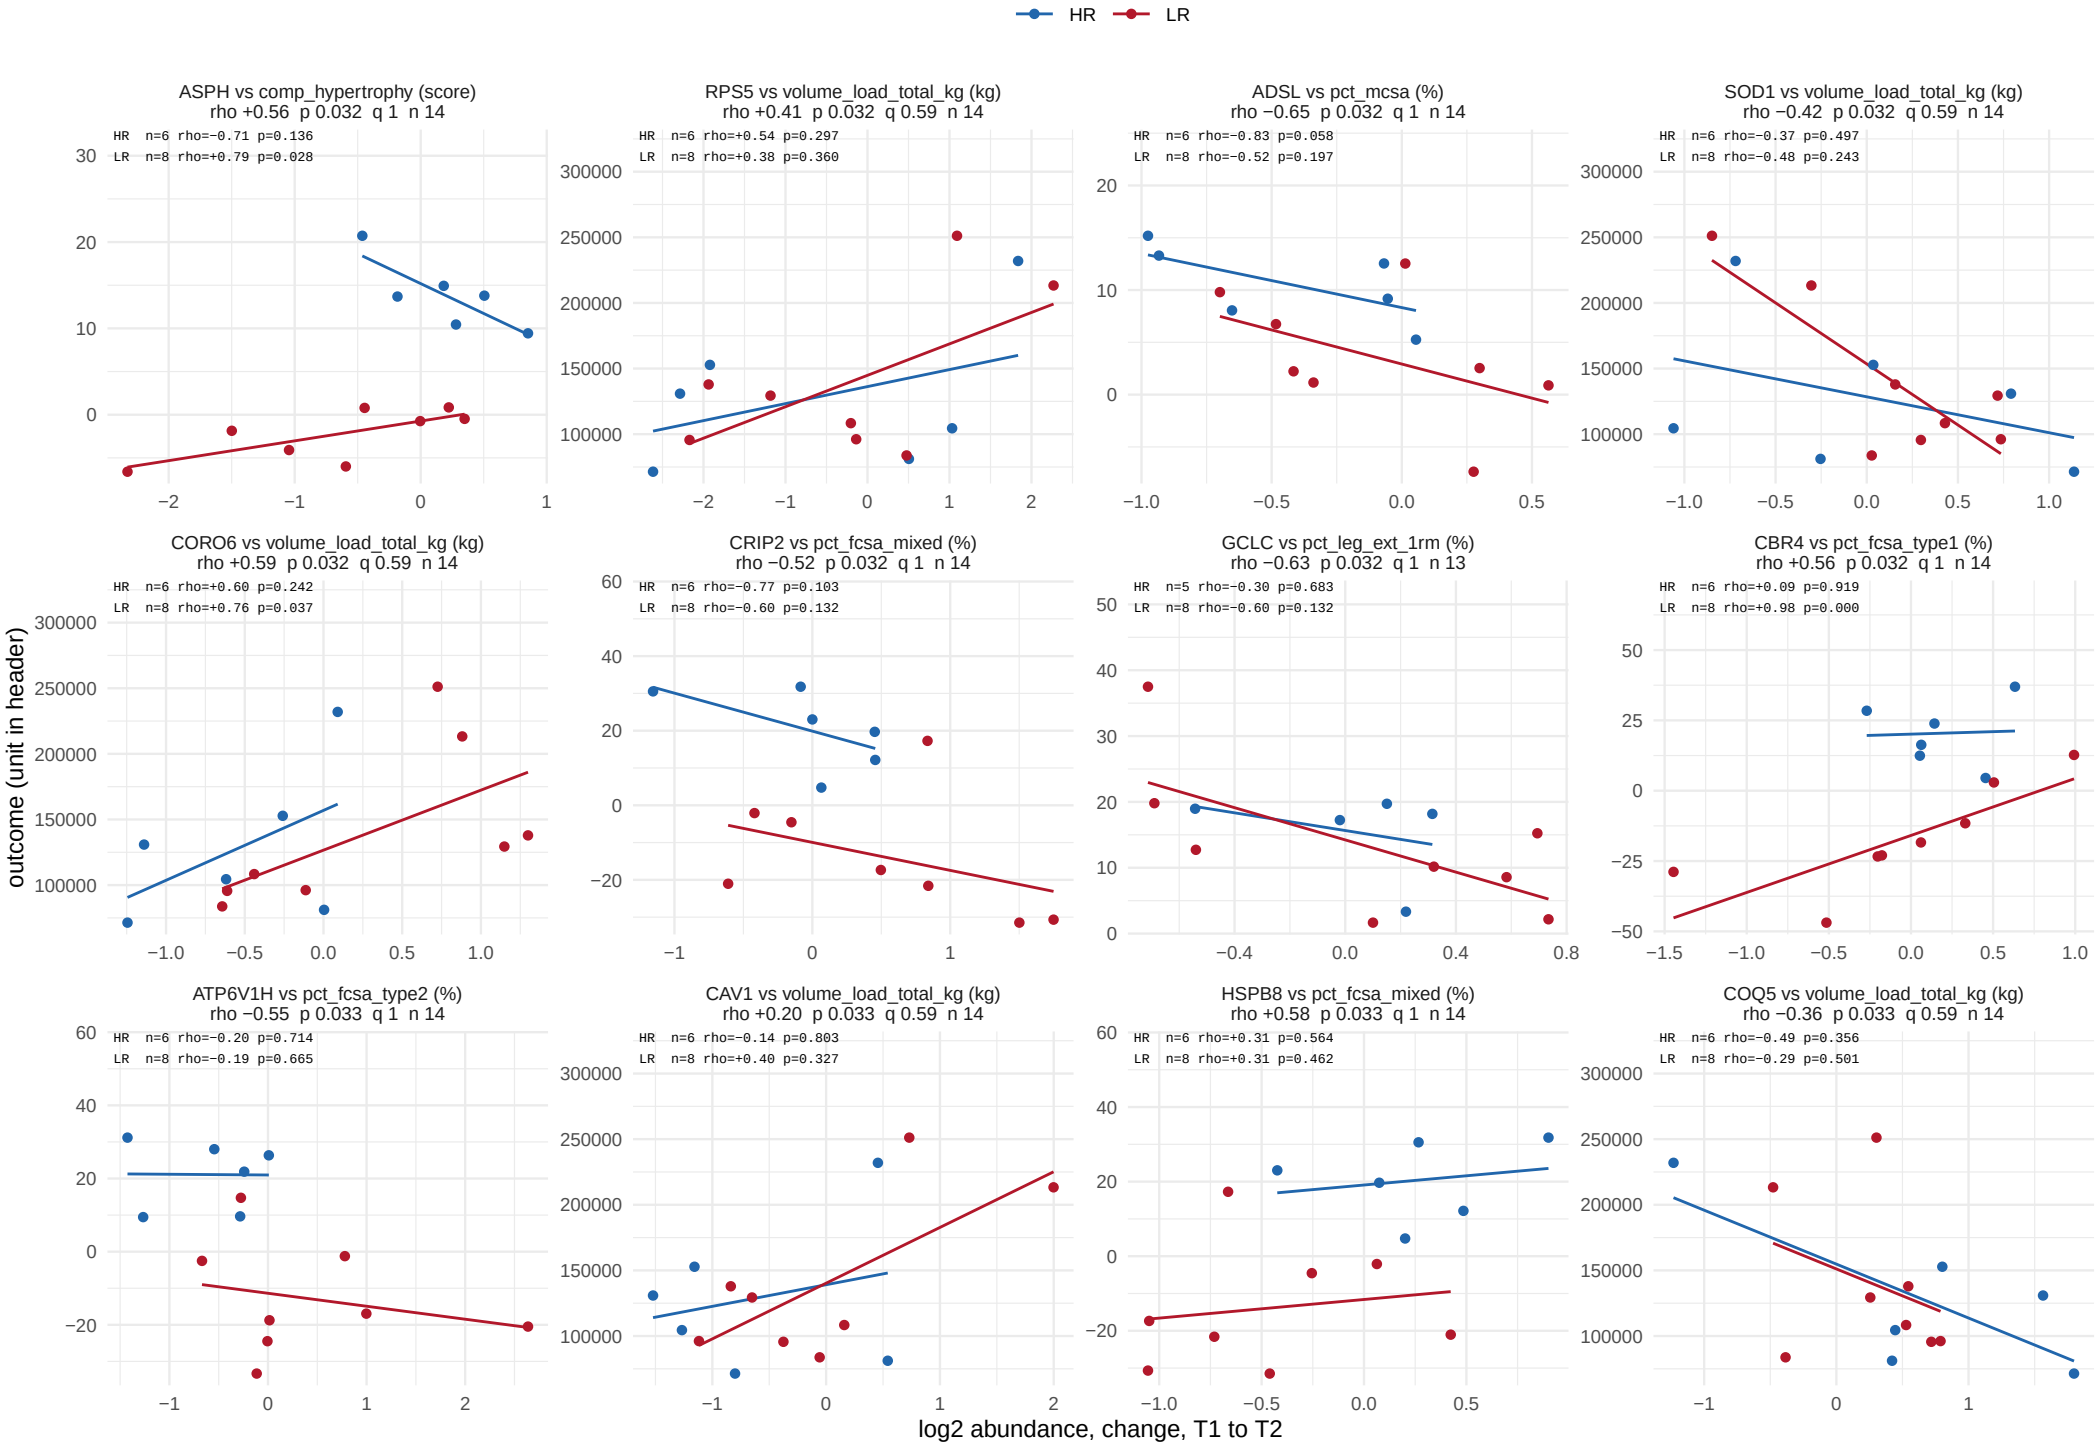

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


628 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 34 of 53.

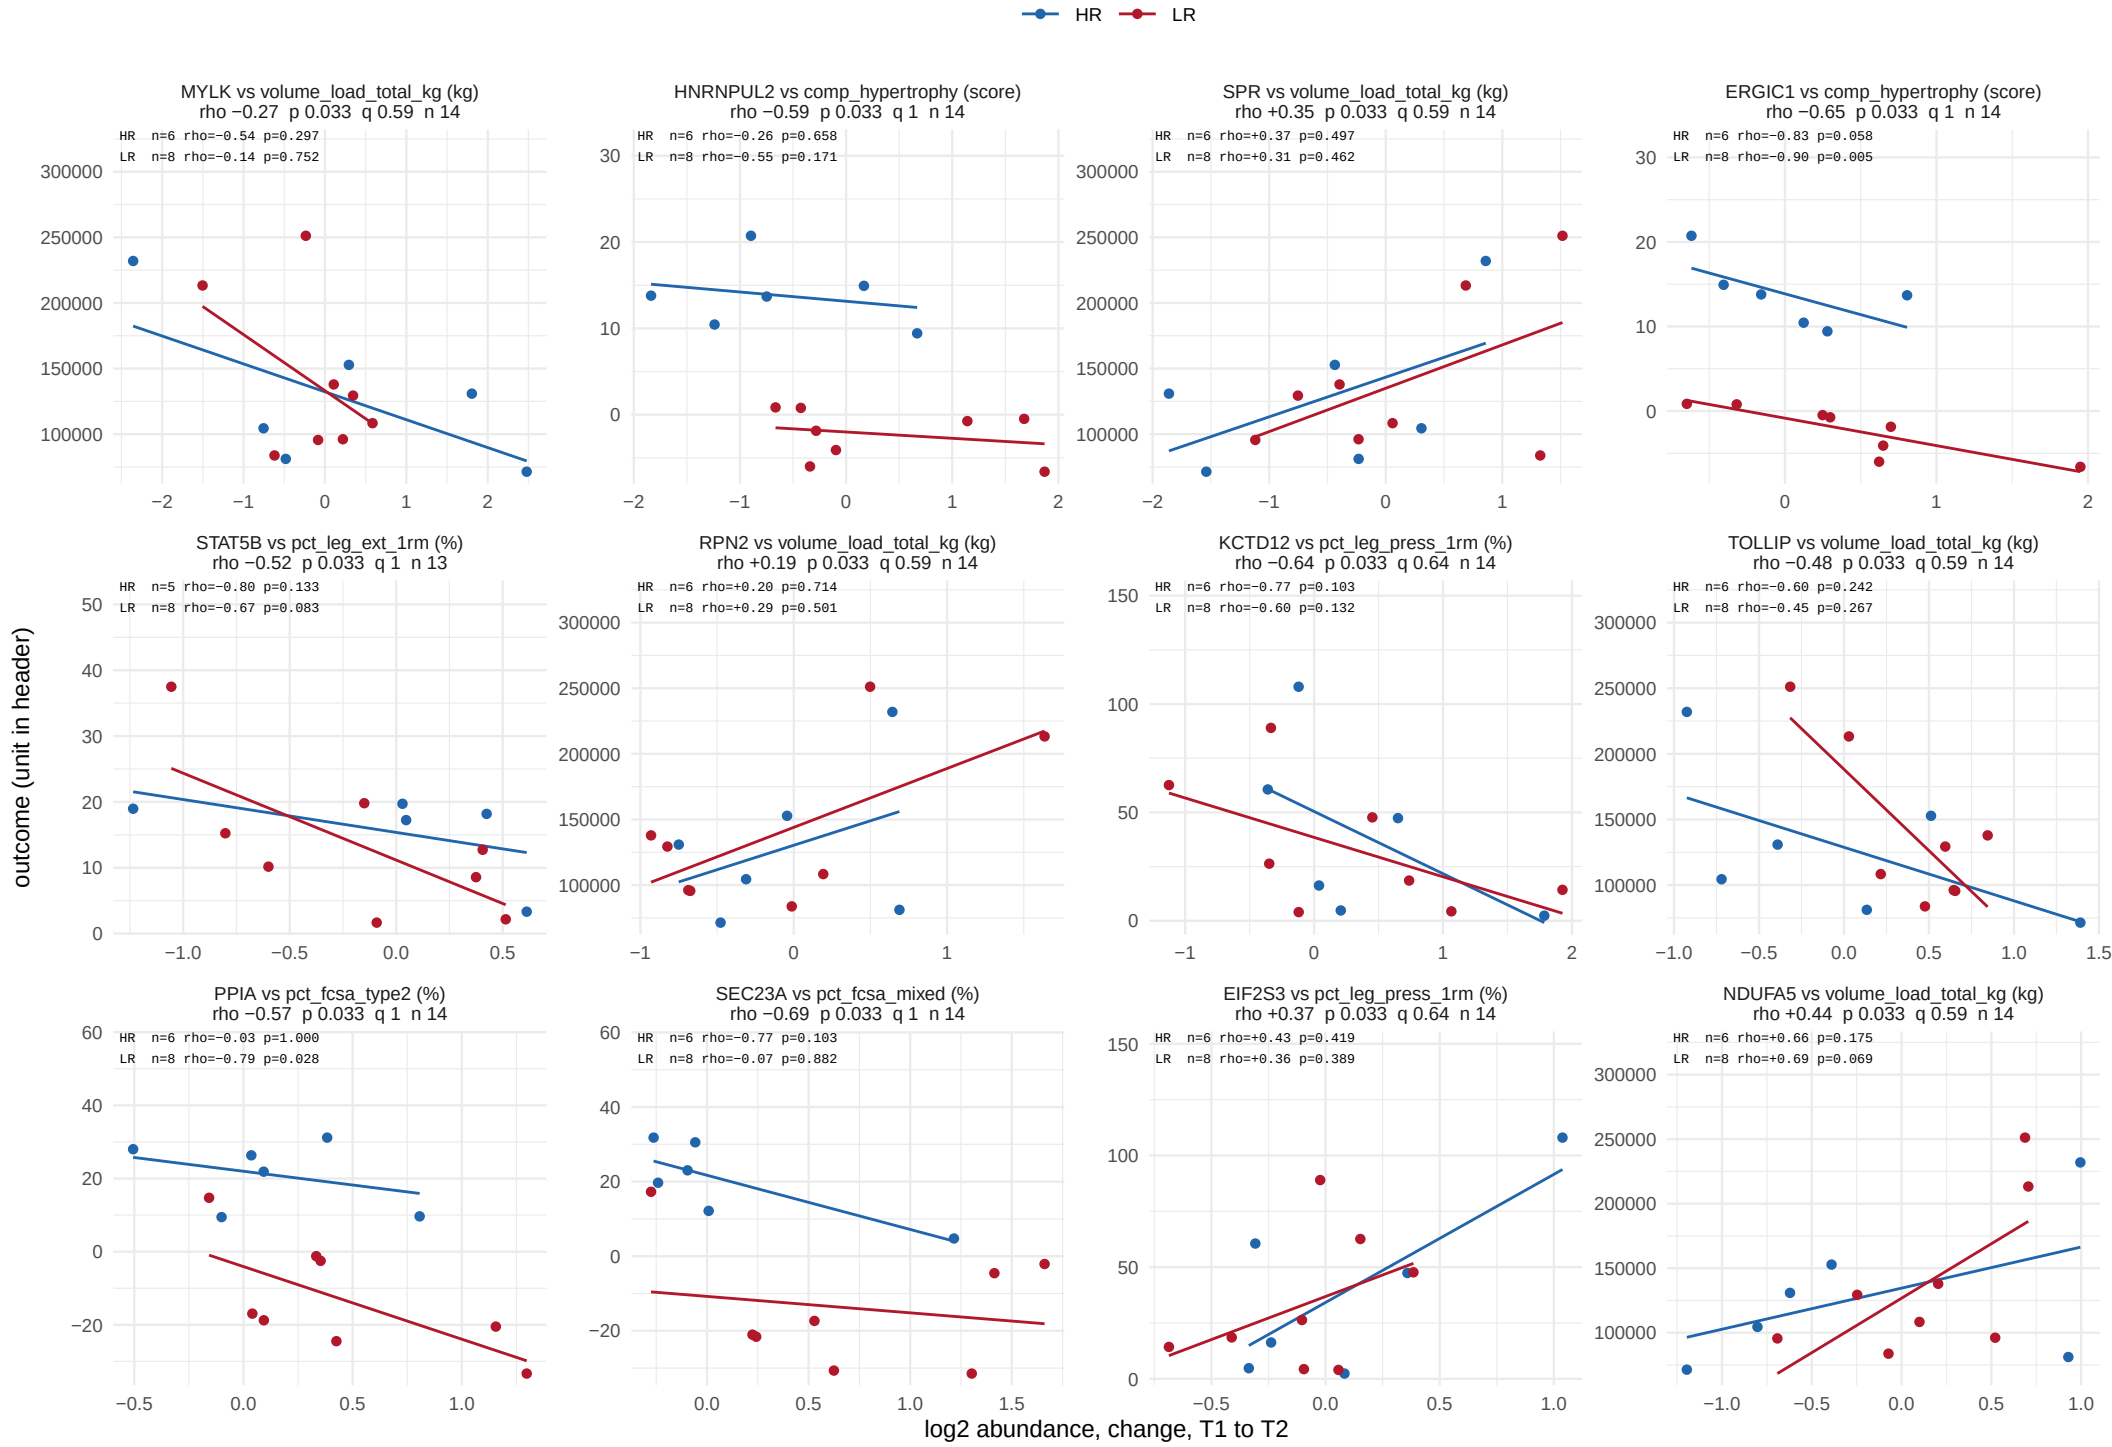

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


628 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 35 of 53.

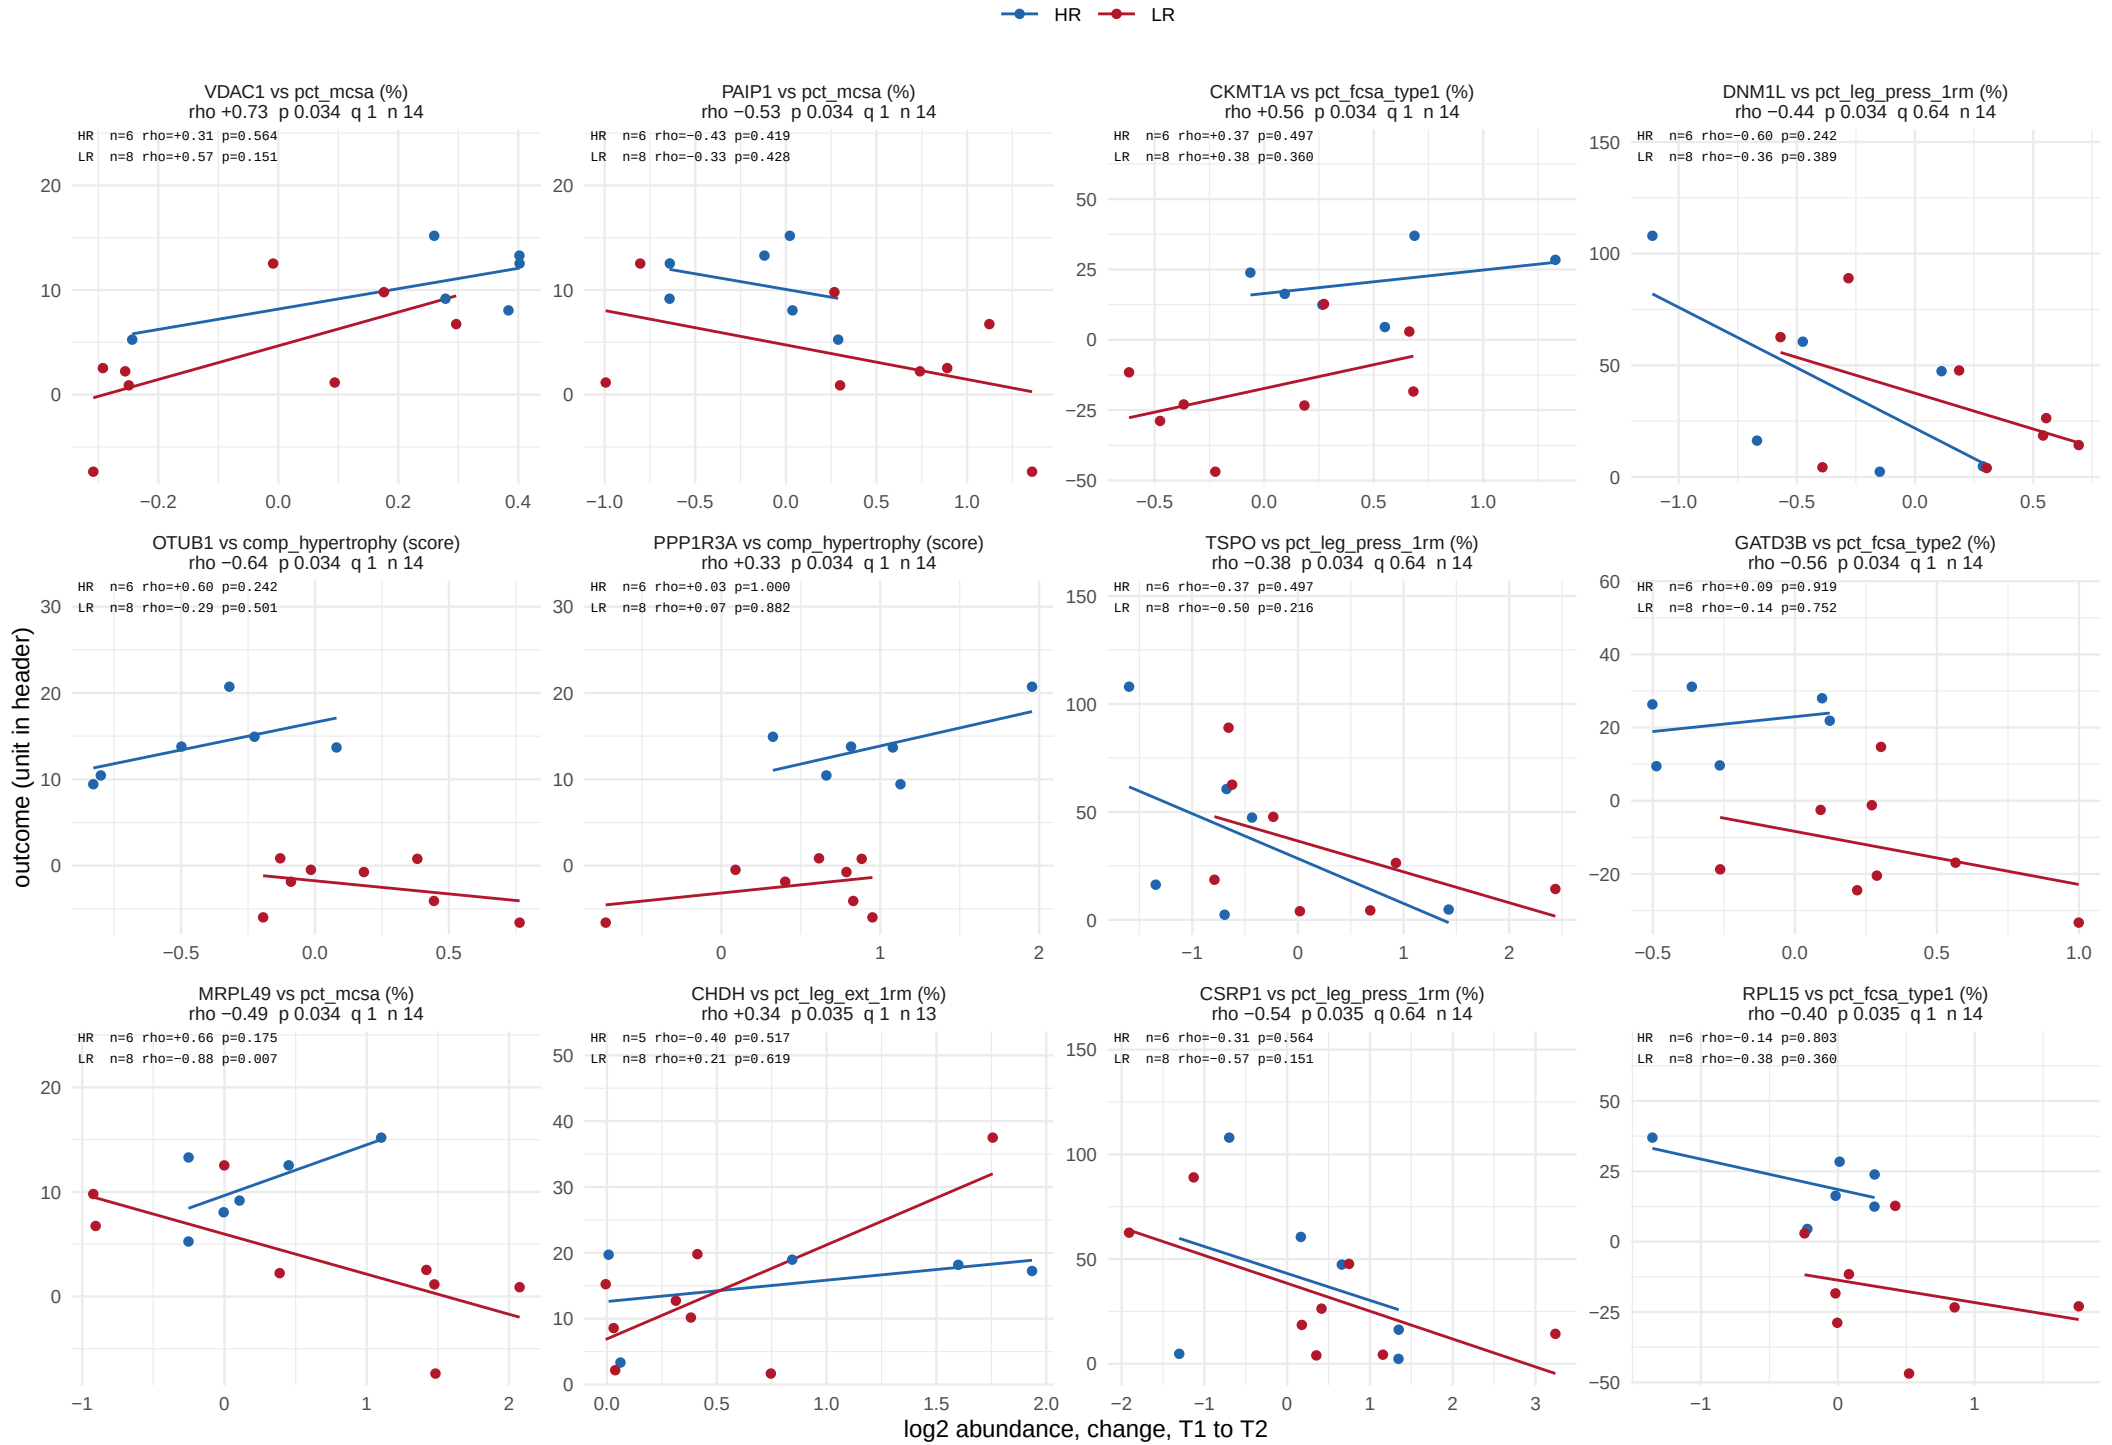

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


628 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 36 of 53.

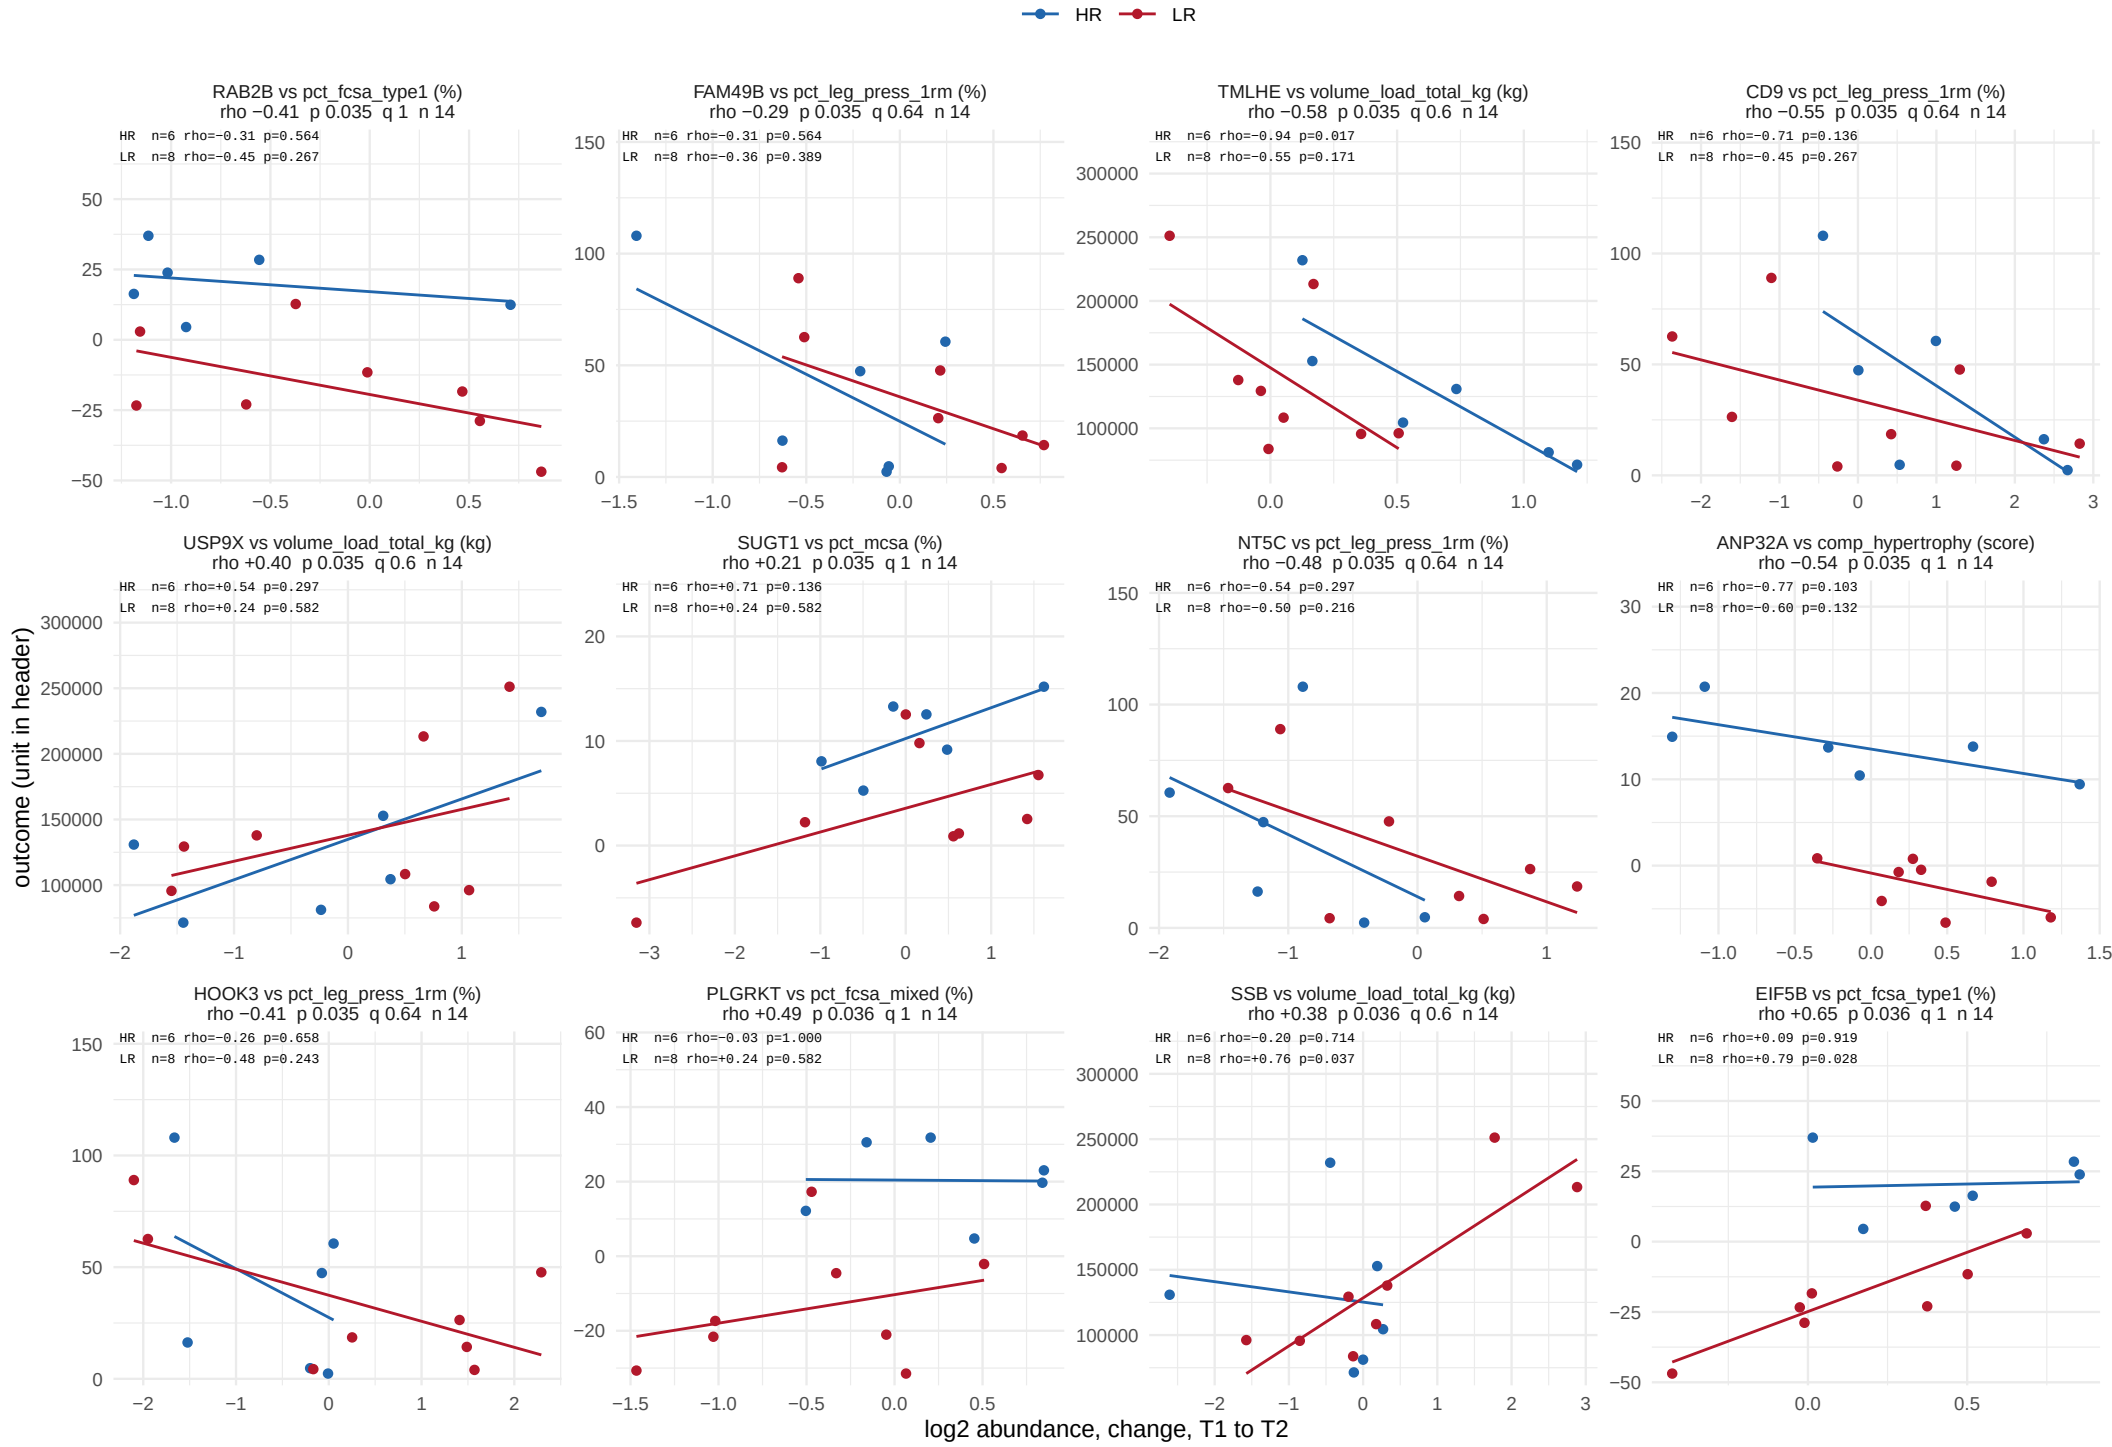

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


628 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 37 of 53.

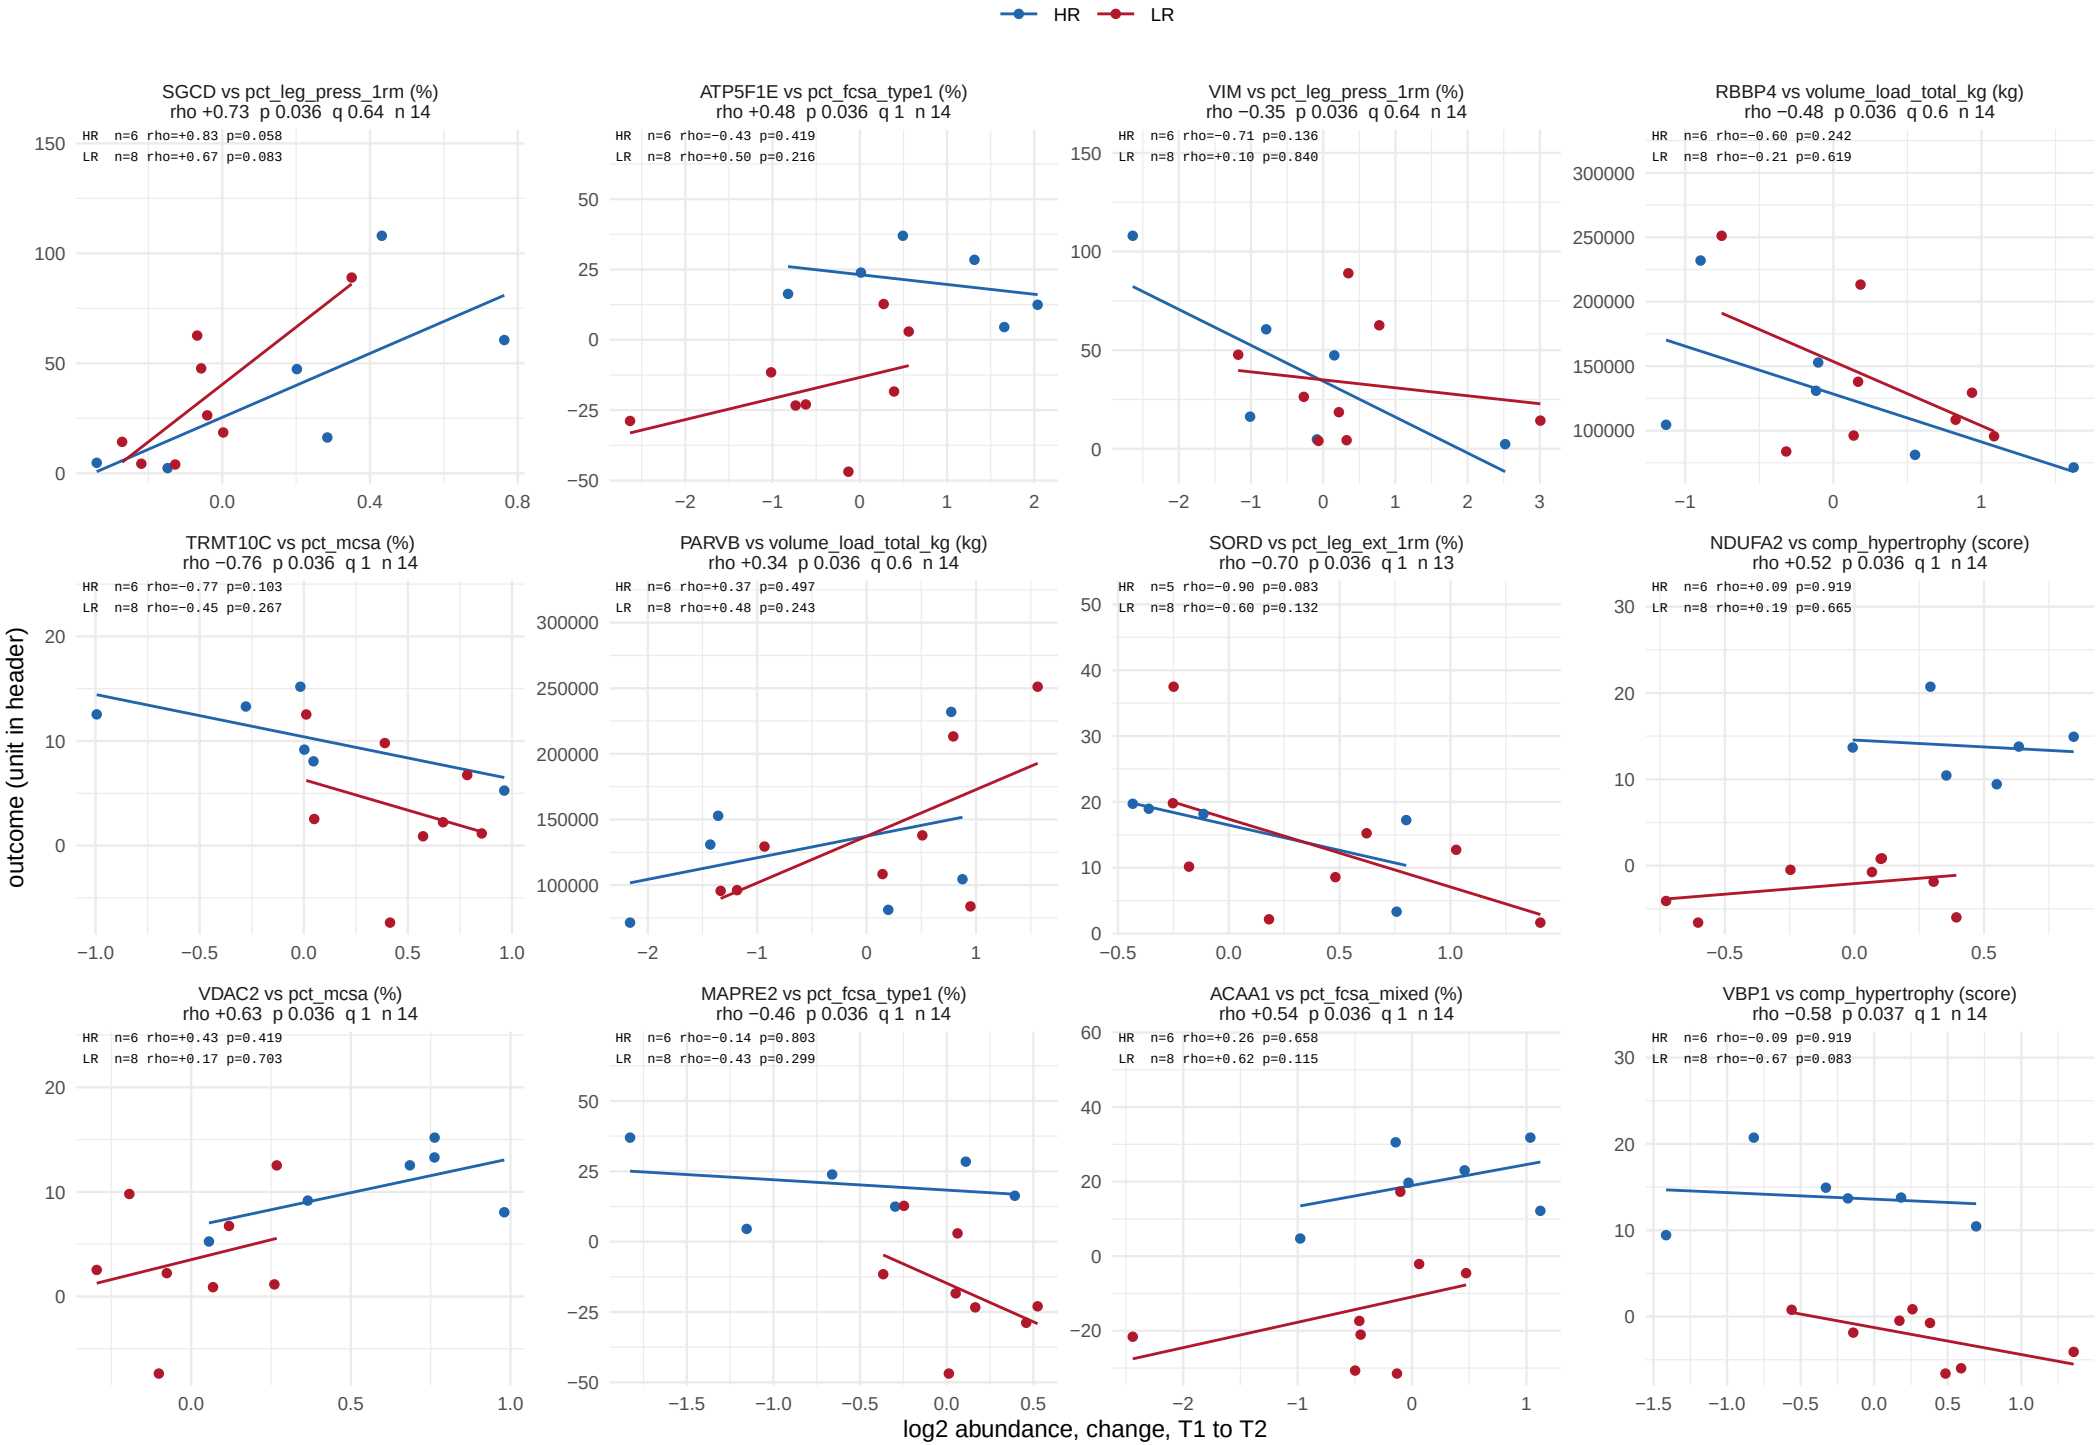

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


628 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 38 of 53.

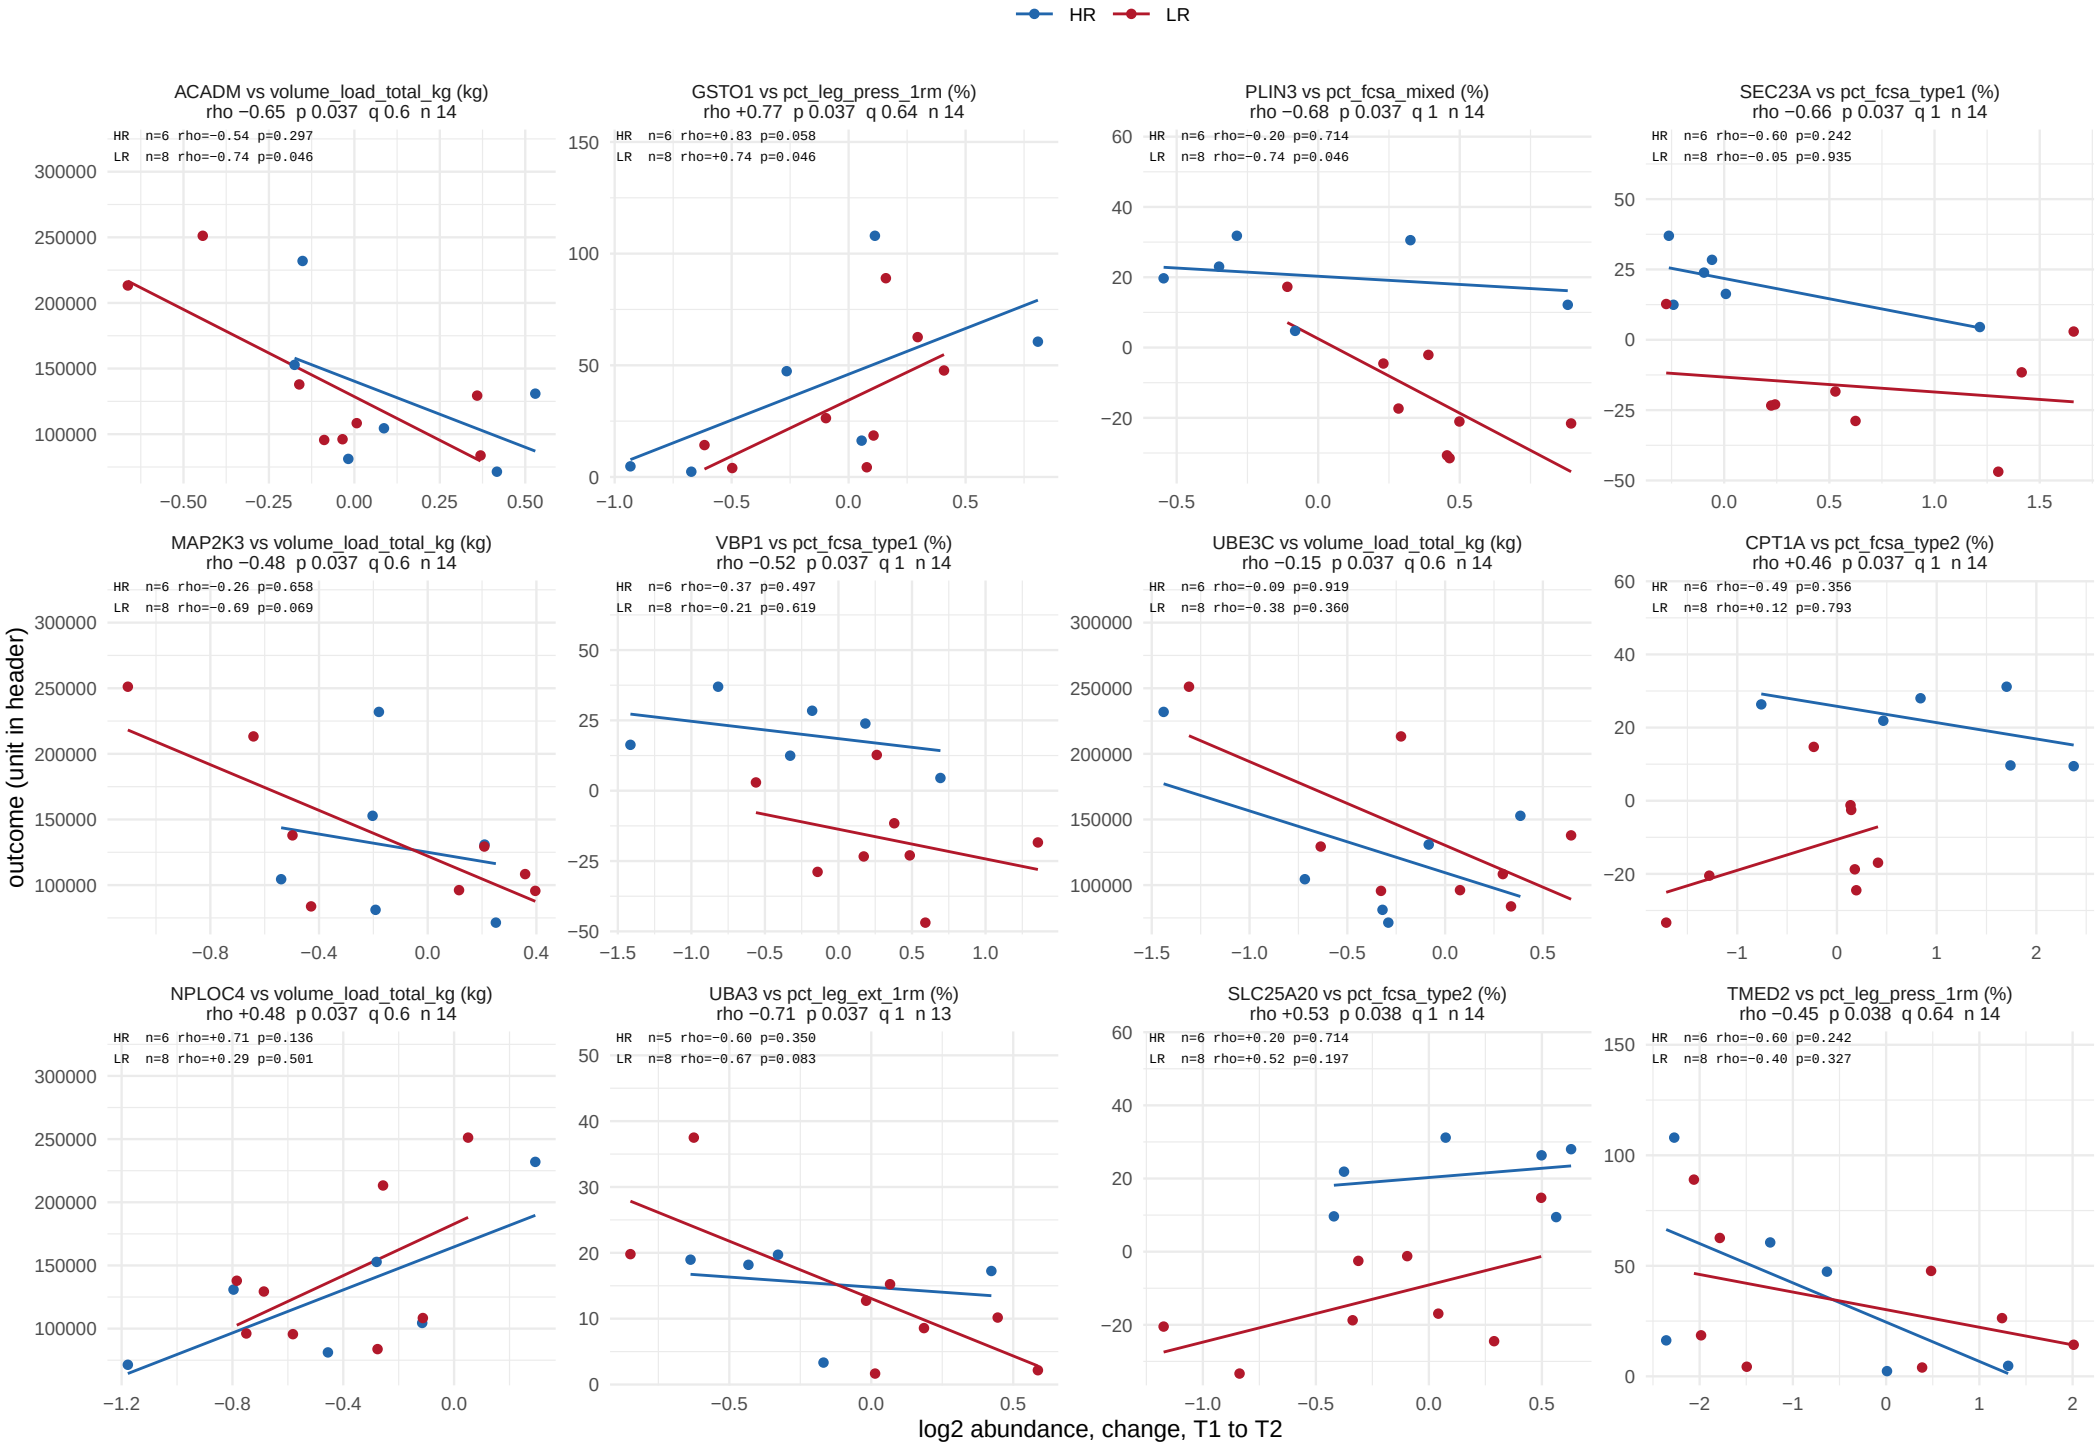

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


628 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 39 of 53.

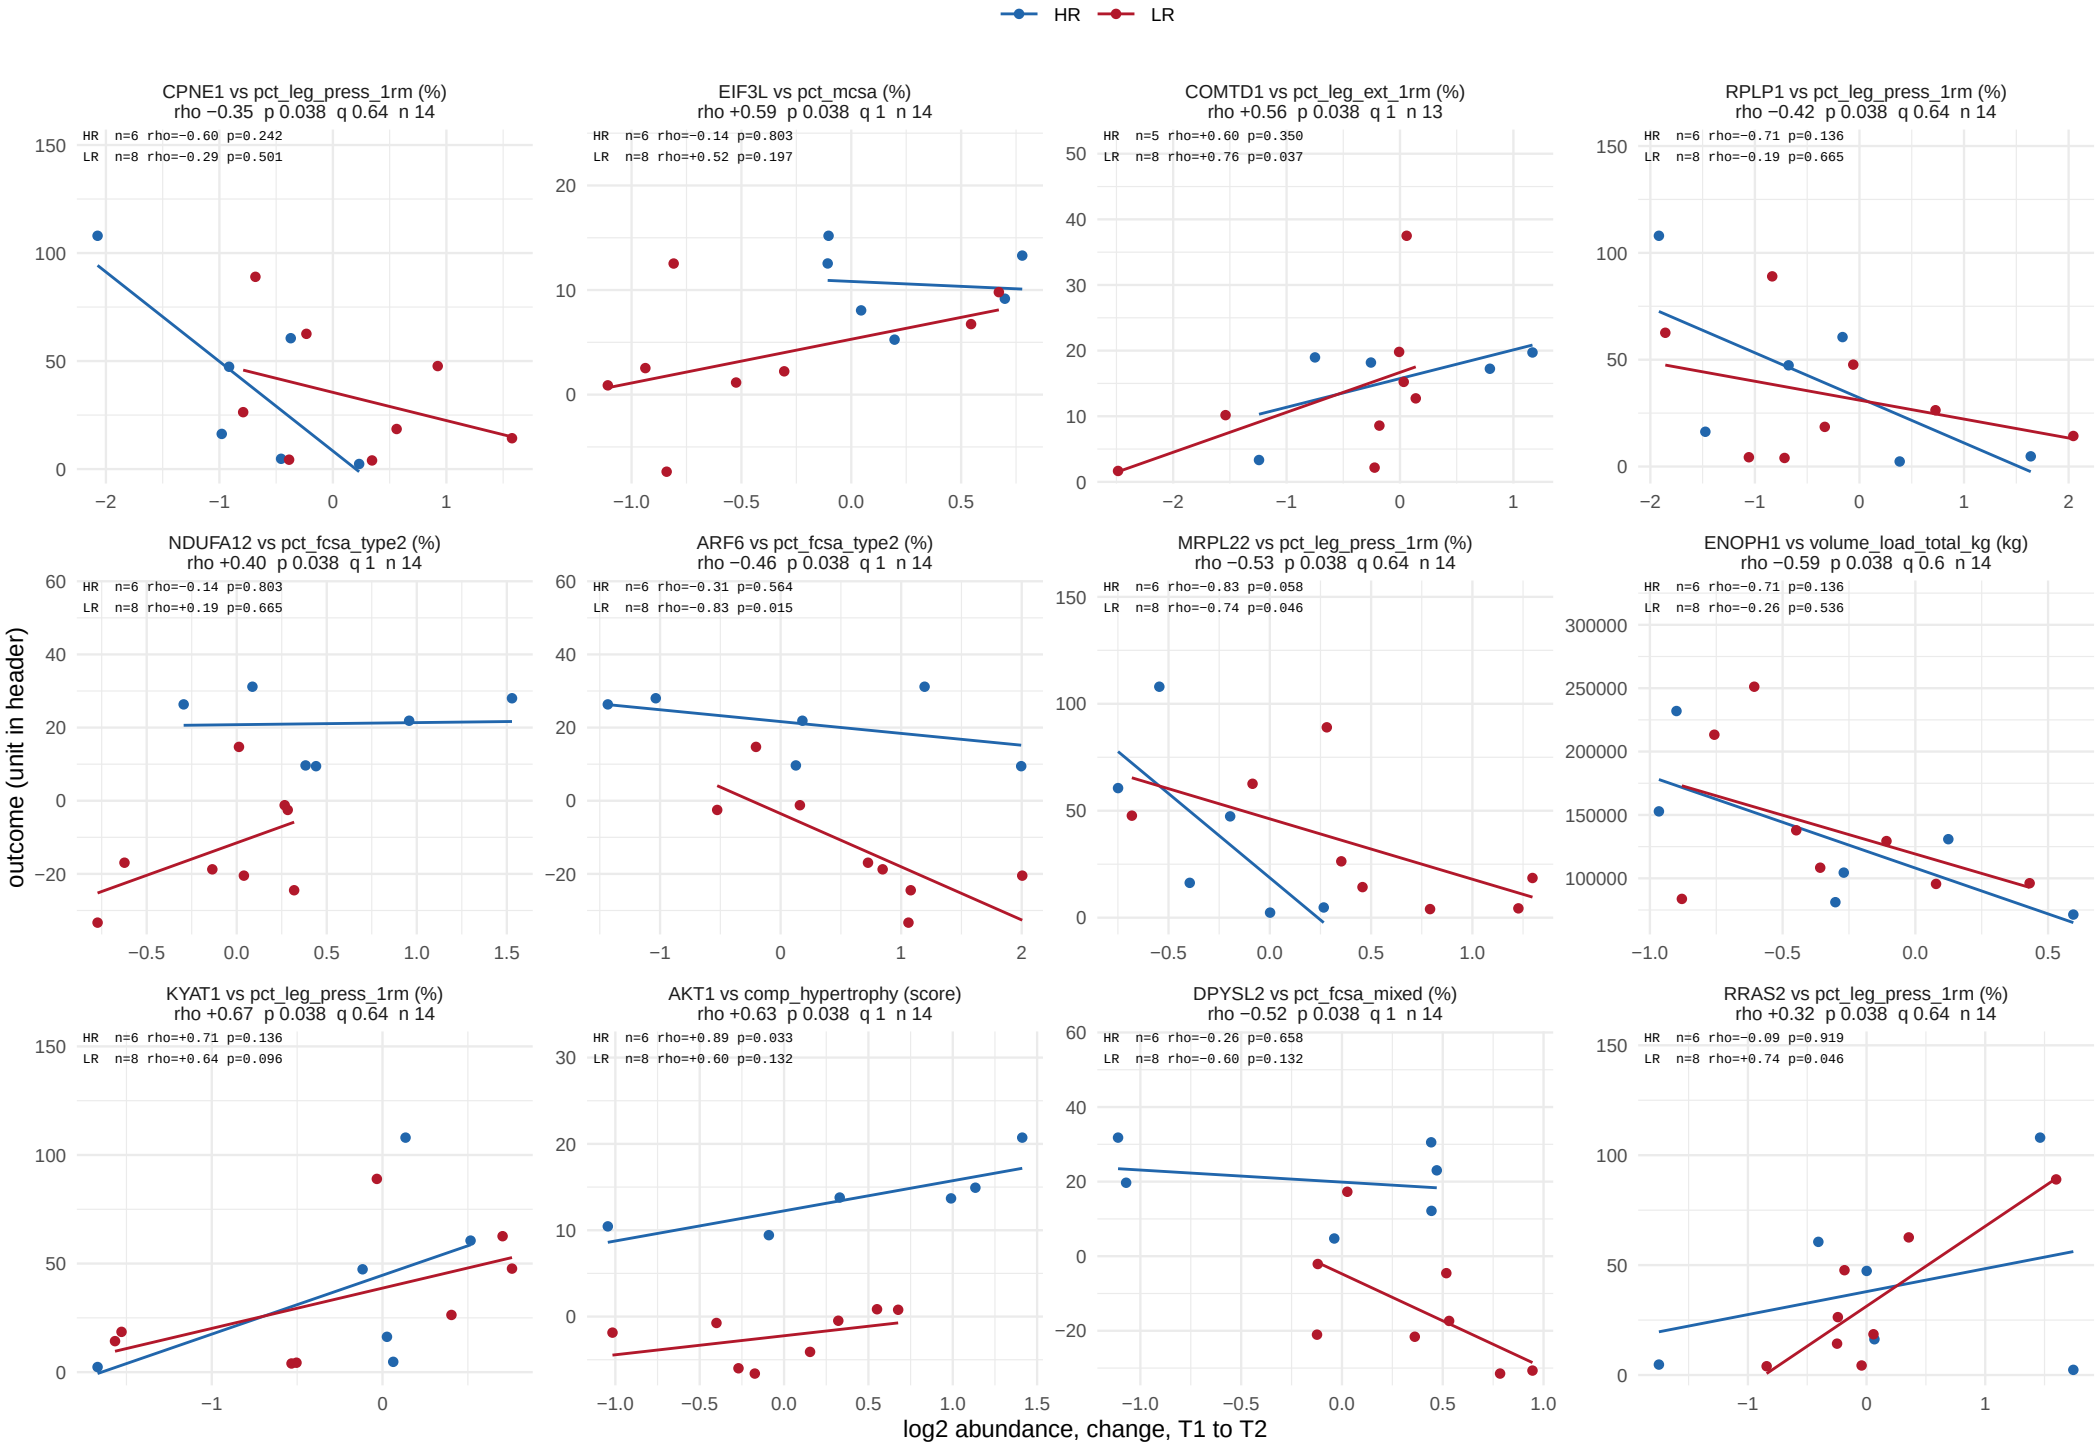

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


628 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 40 of 53.

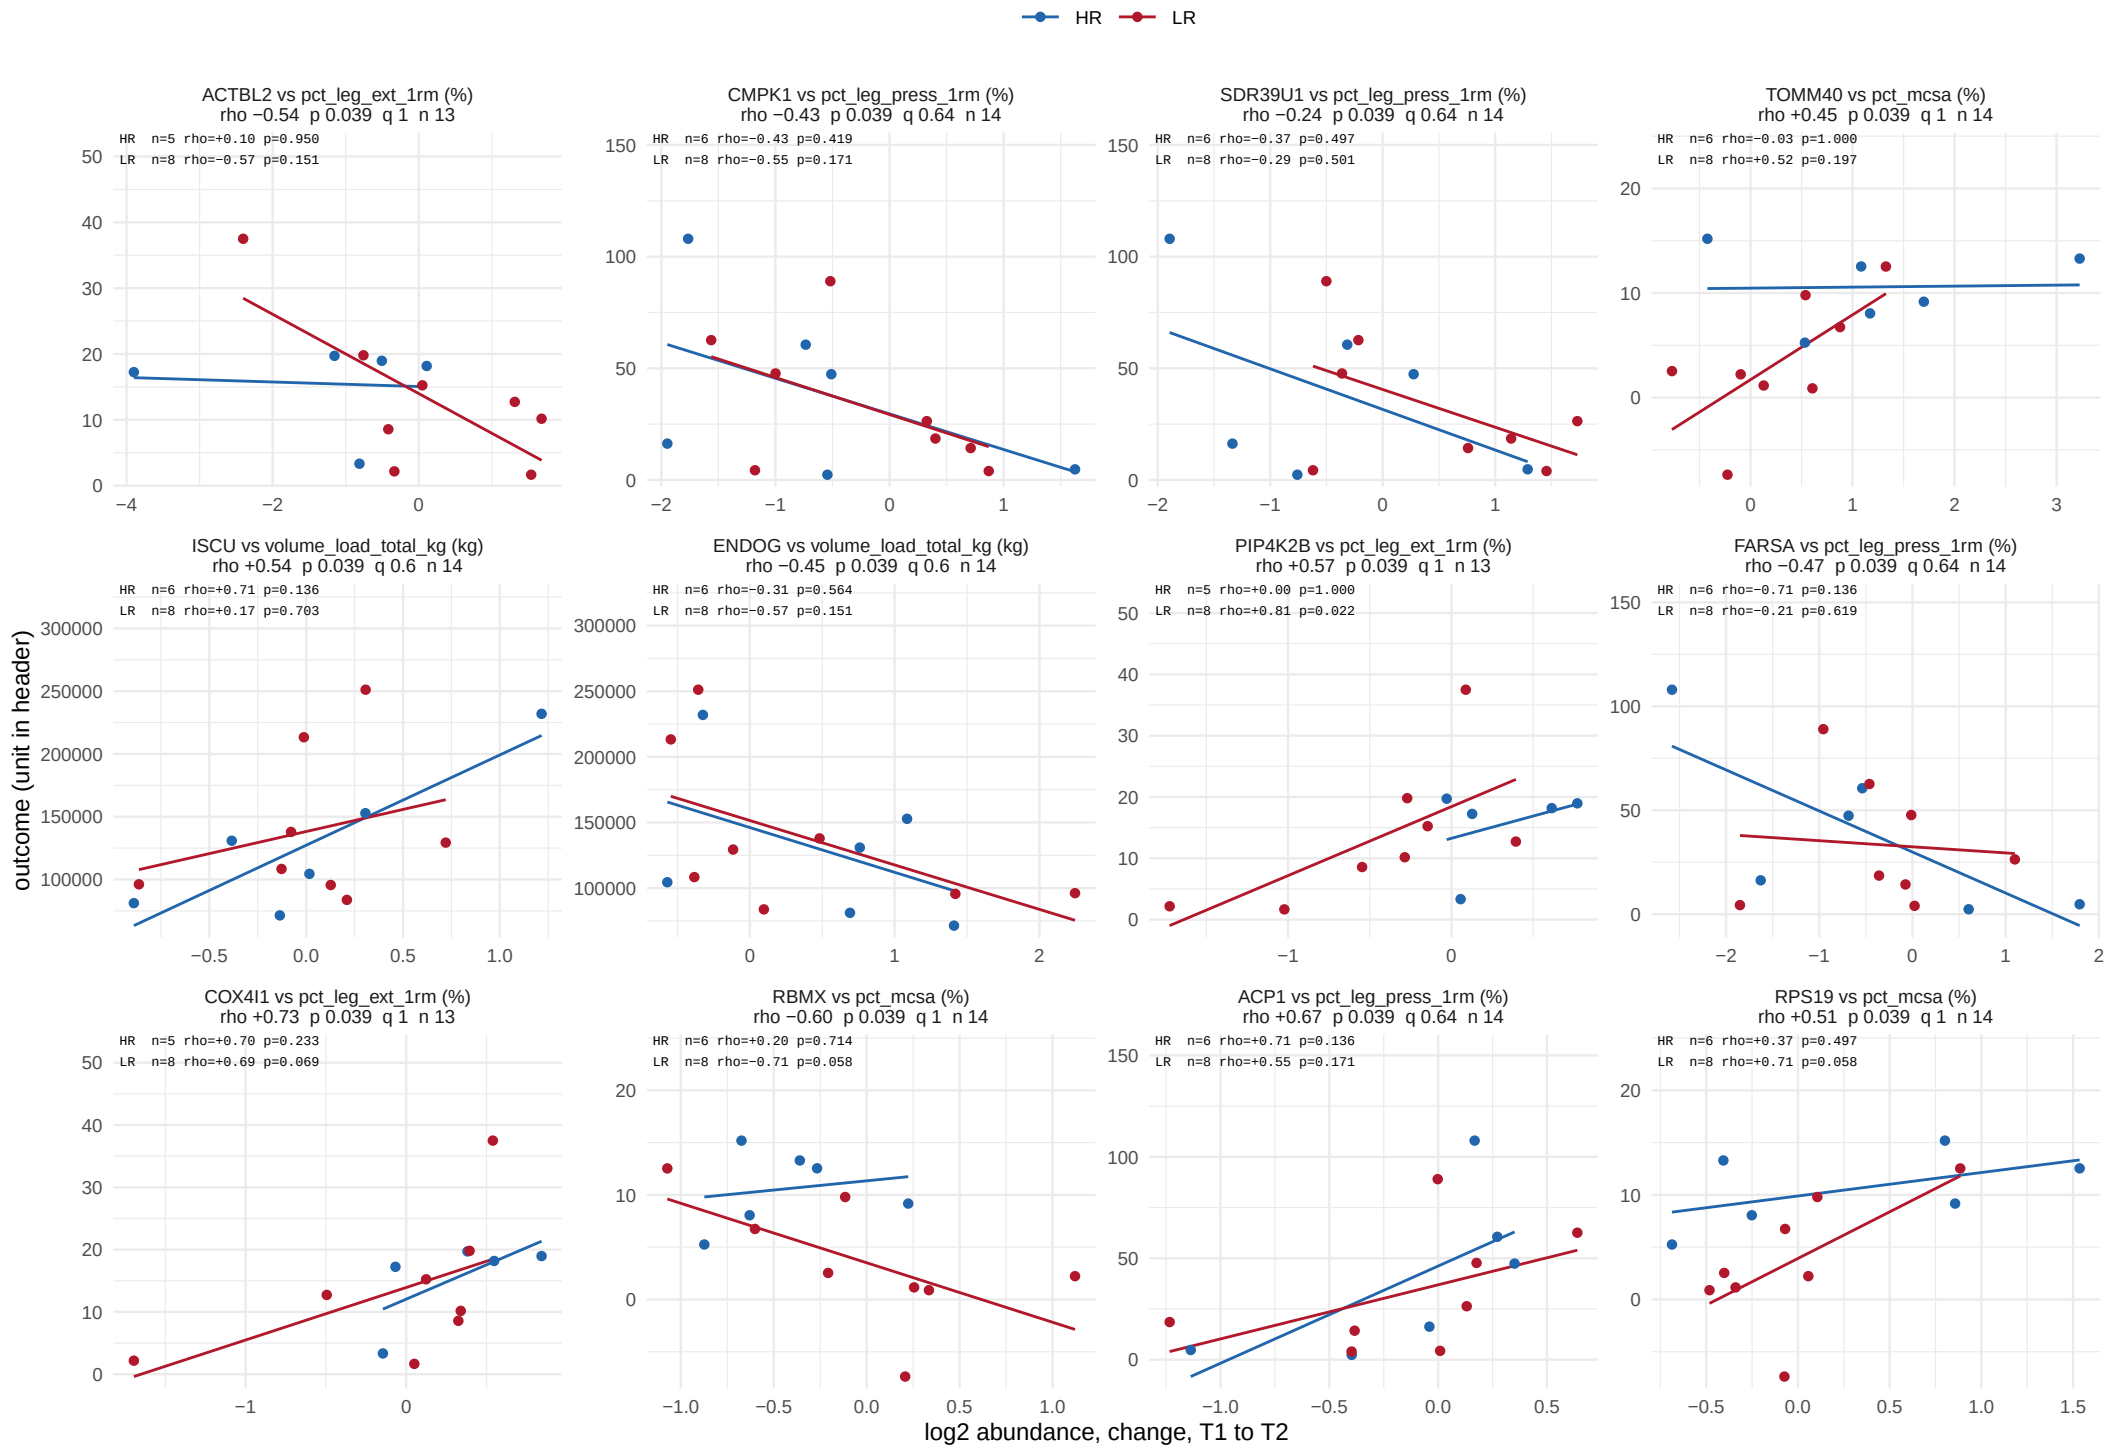

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


628 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 41 of 53.

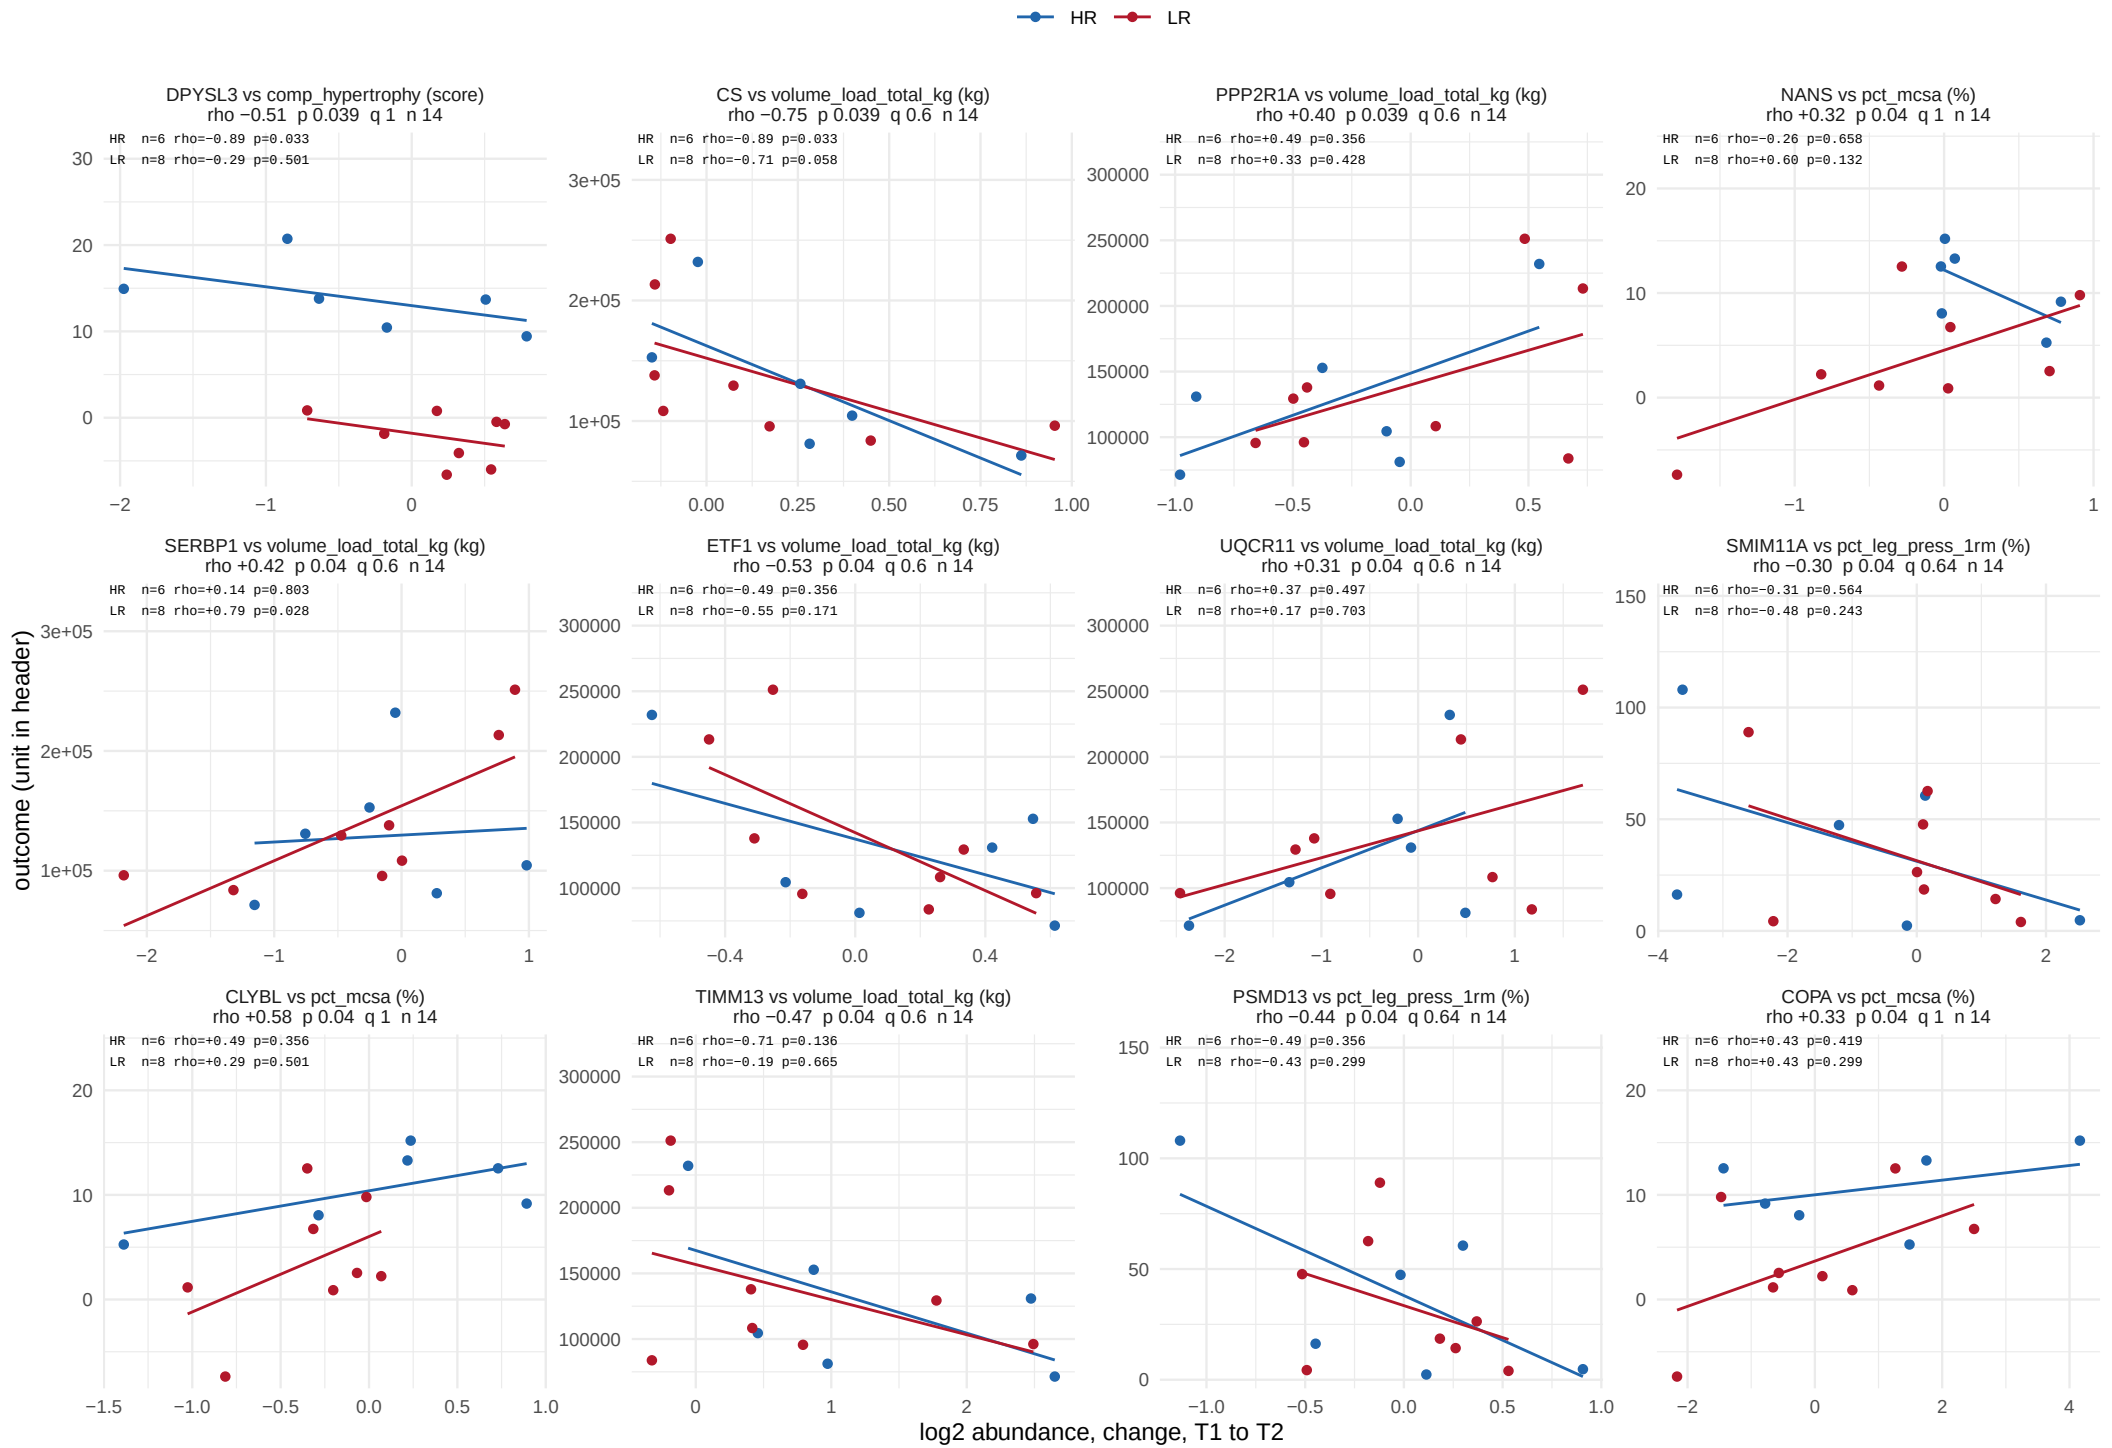

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


628 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 42 of 53.

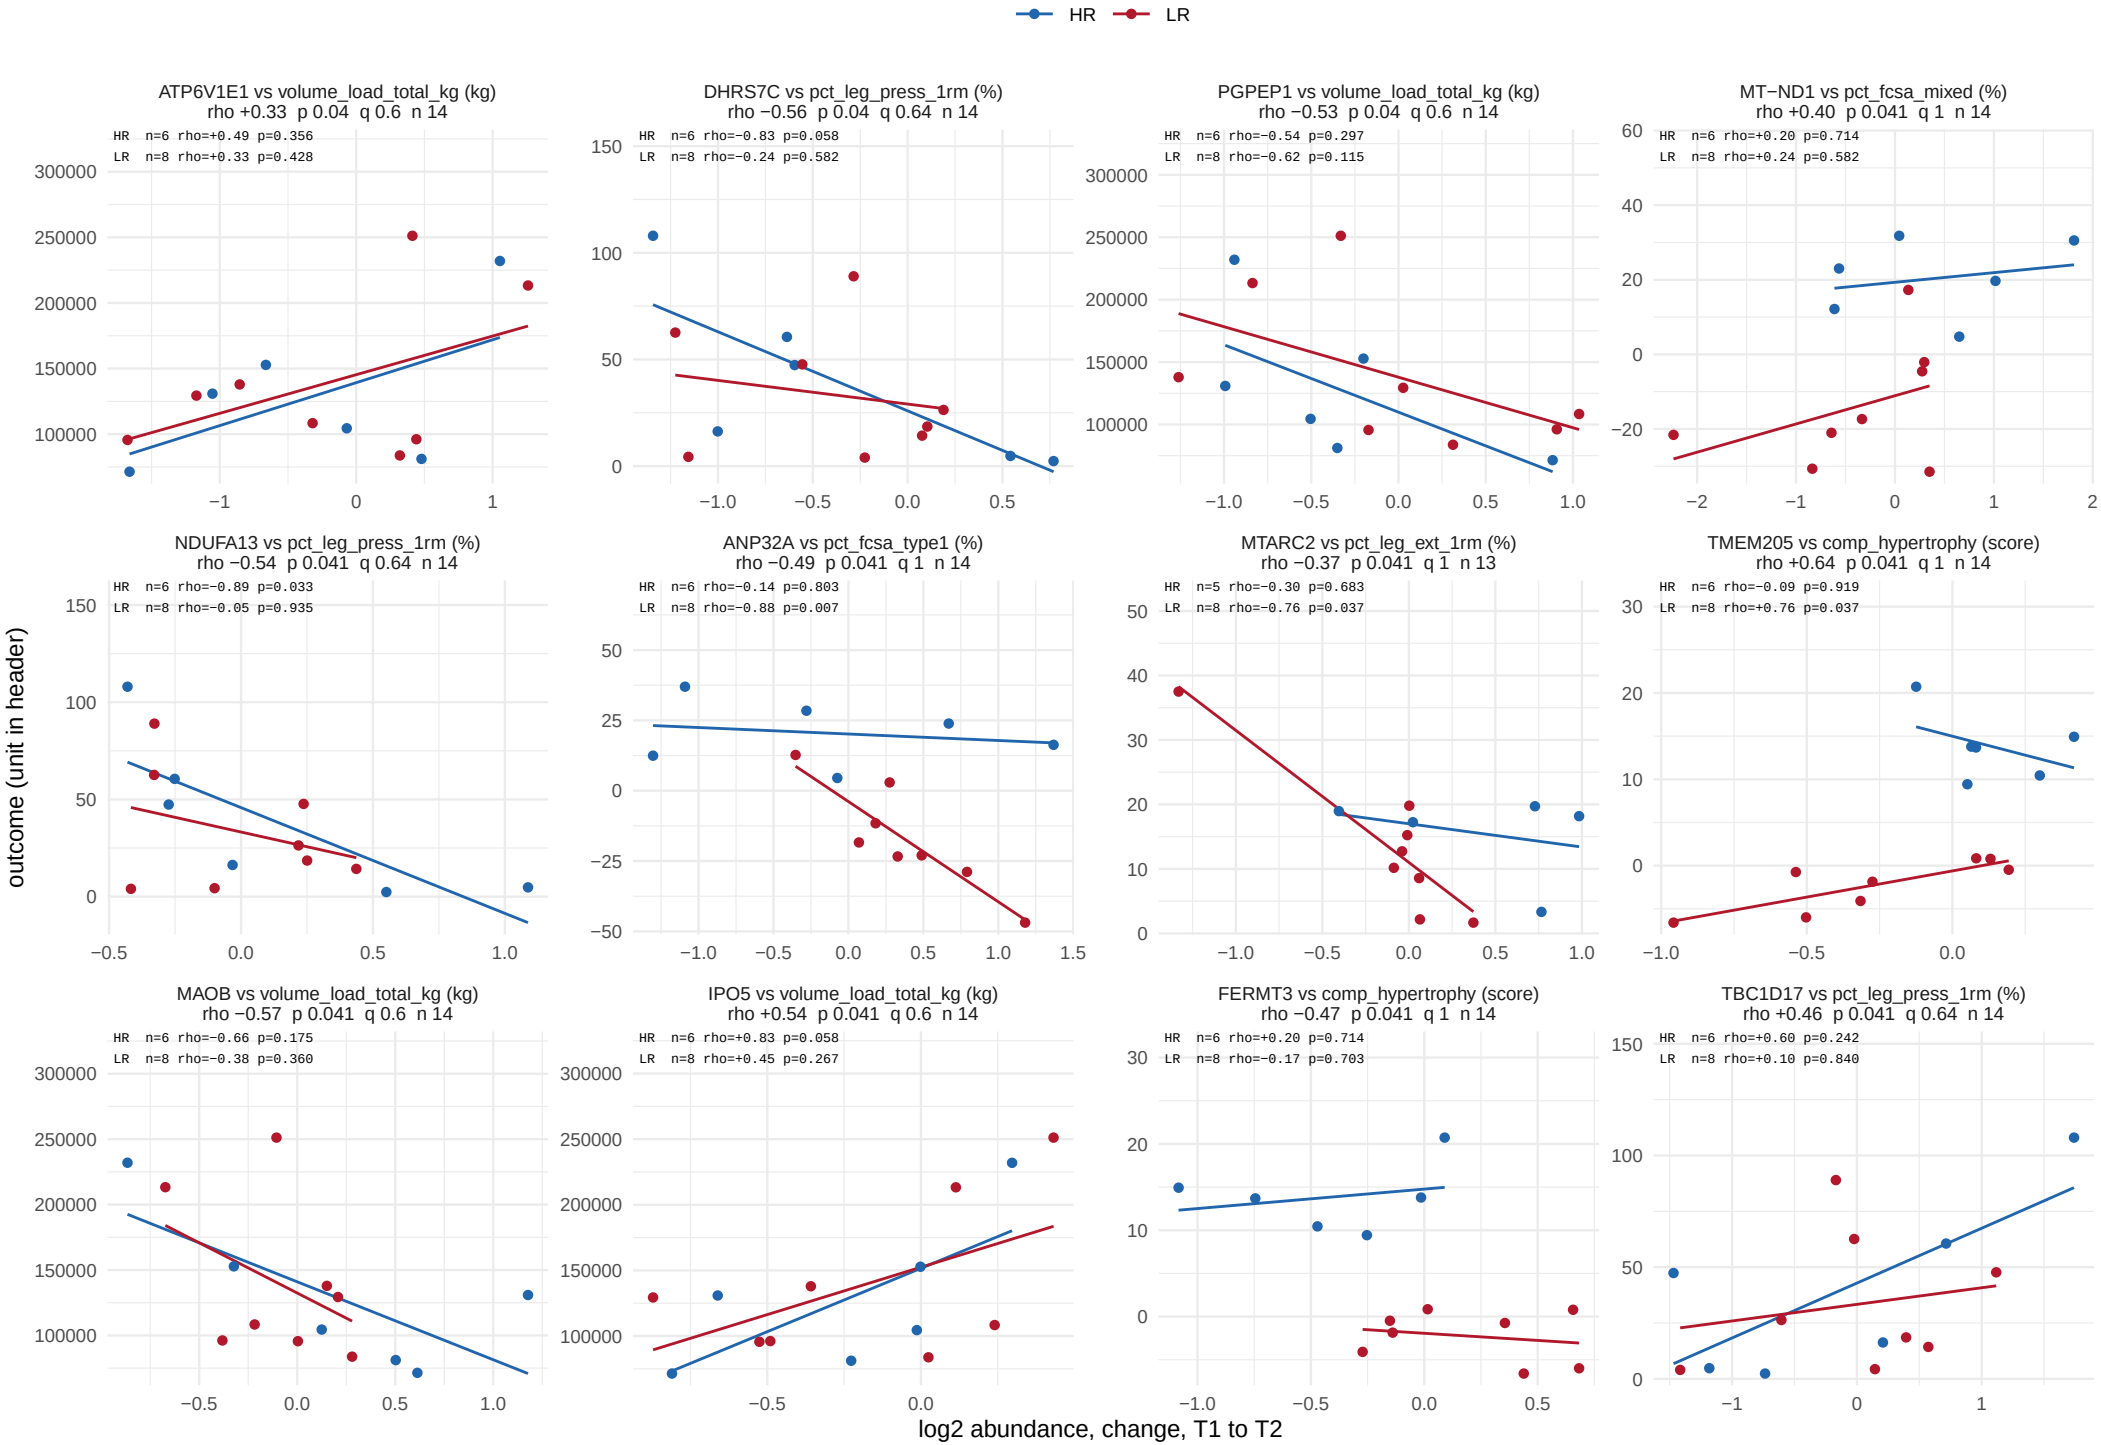

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


628 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 43 of 53.

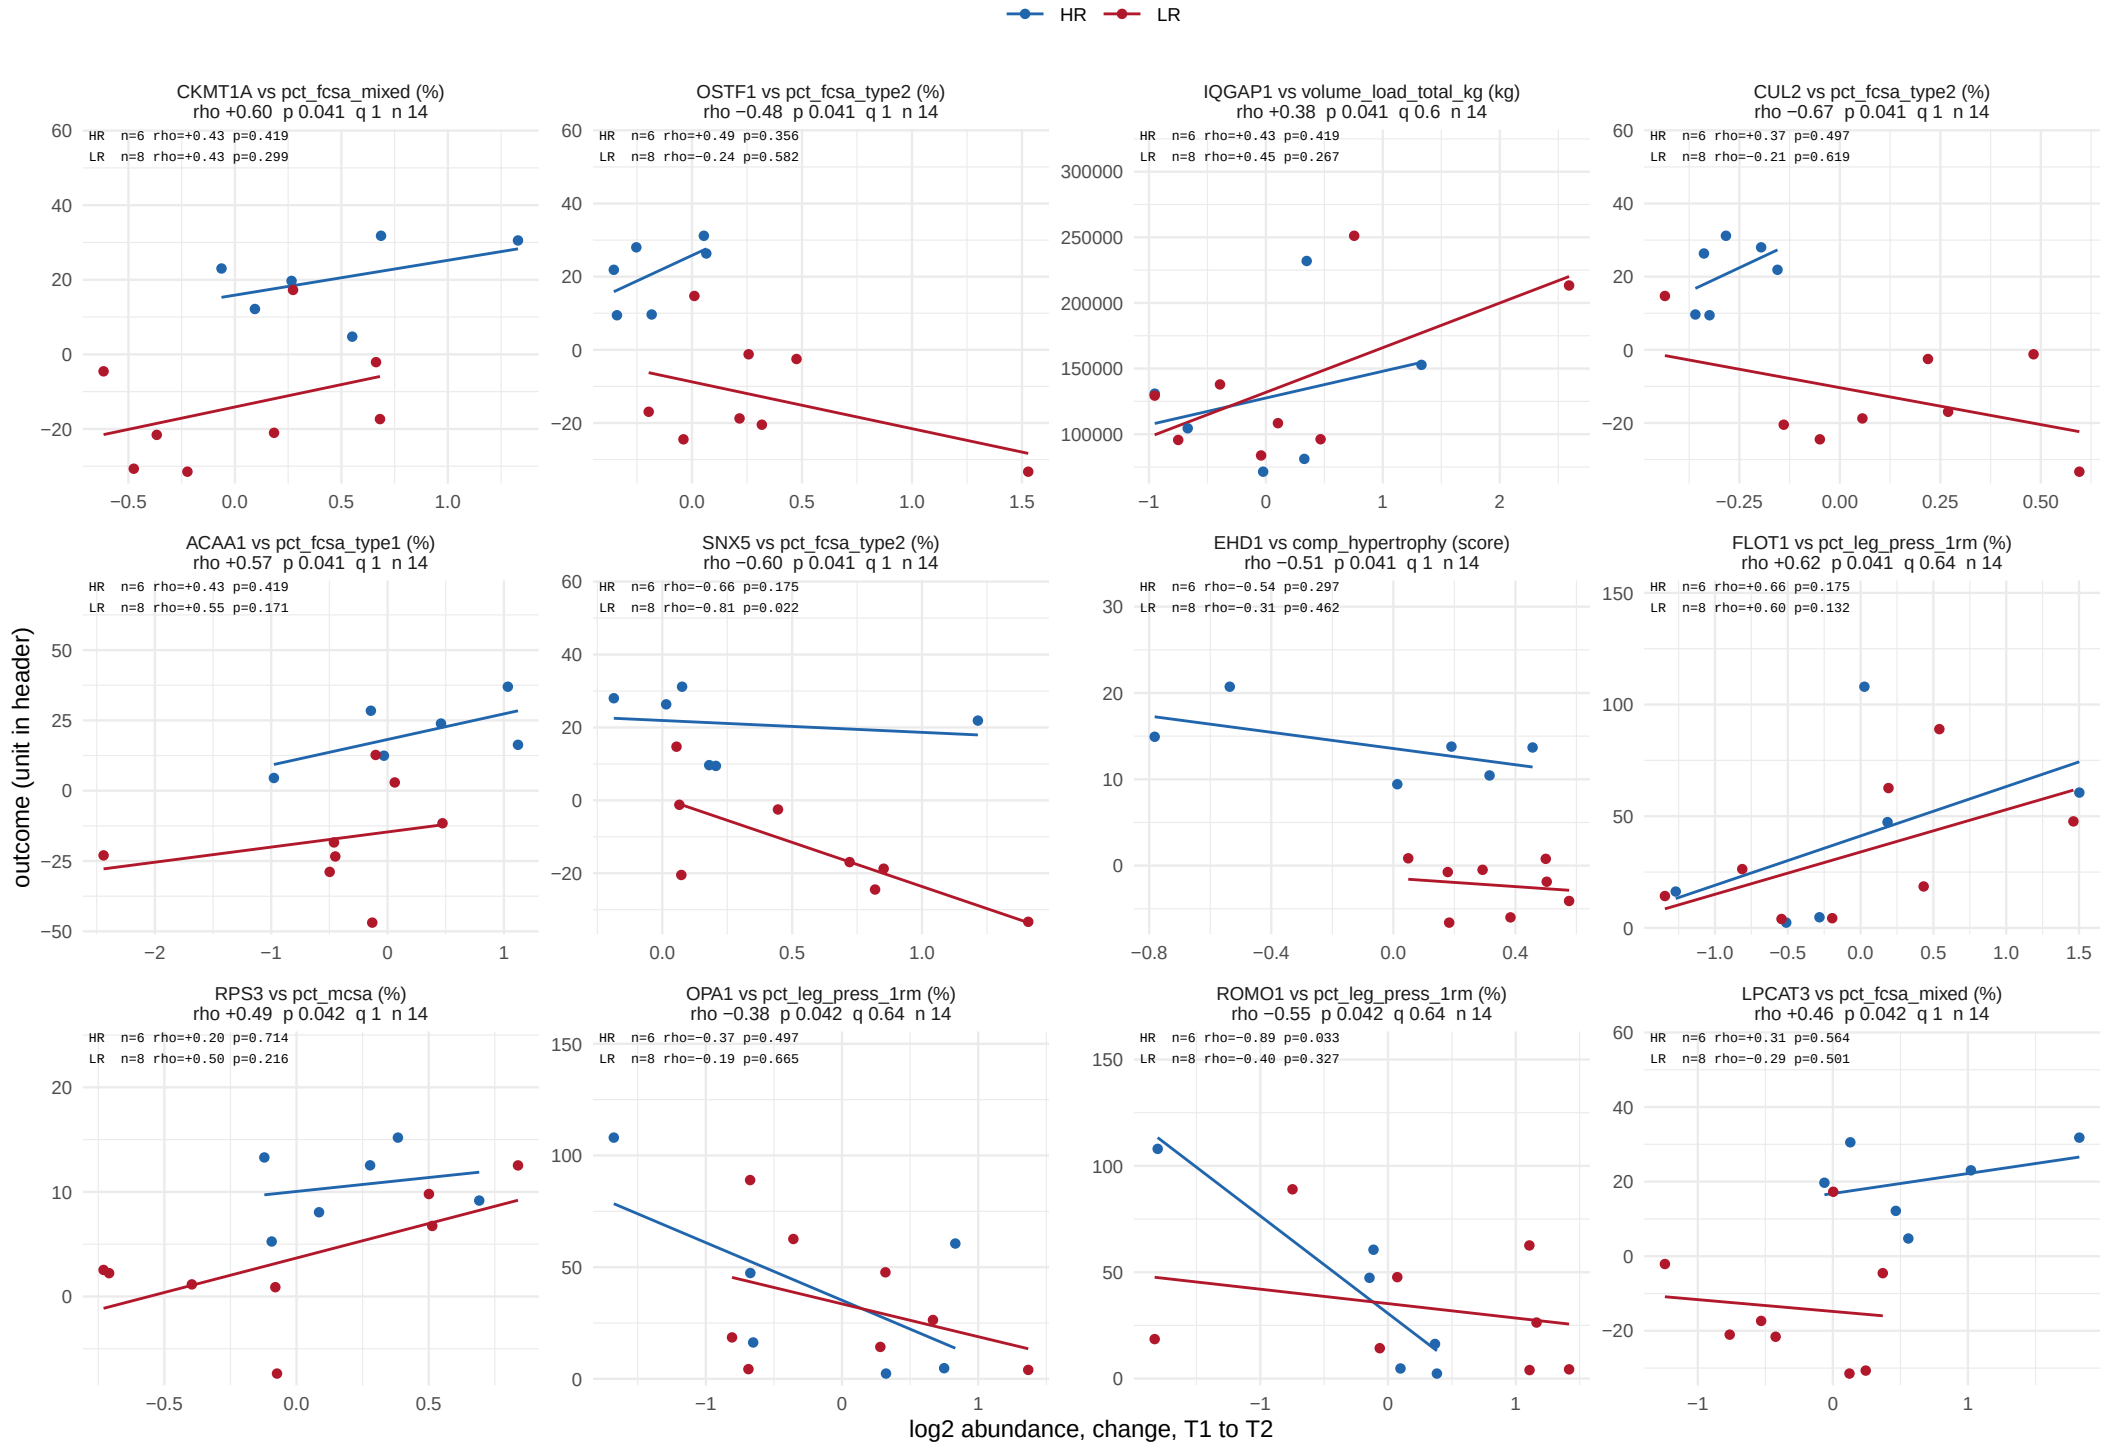

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


628 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 44 of 53.

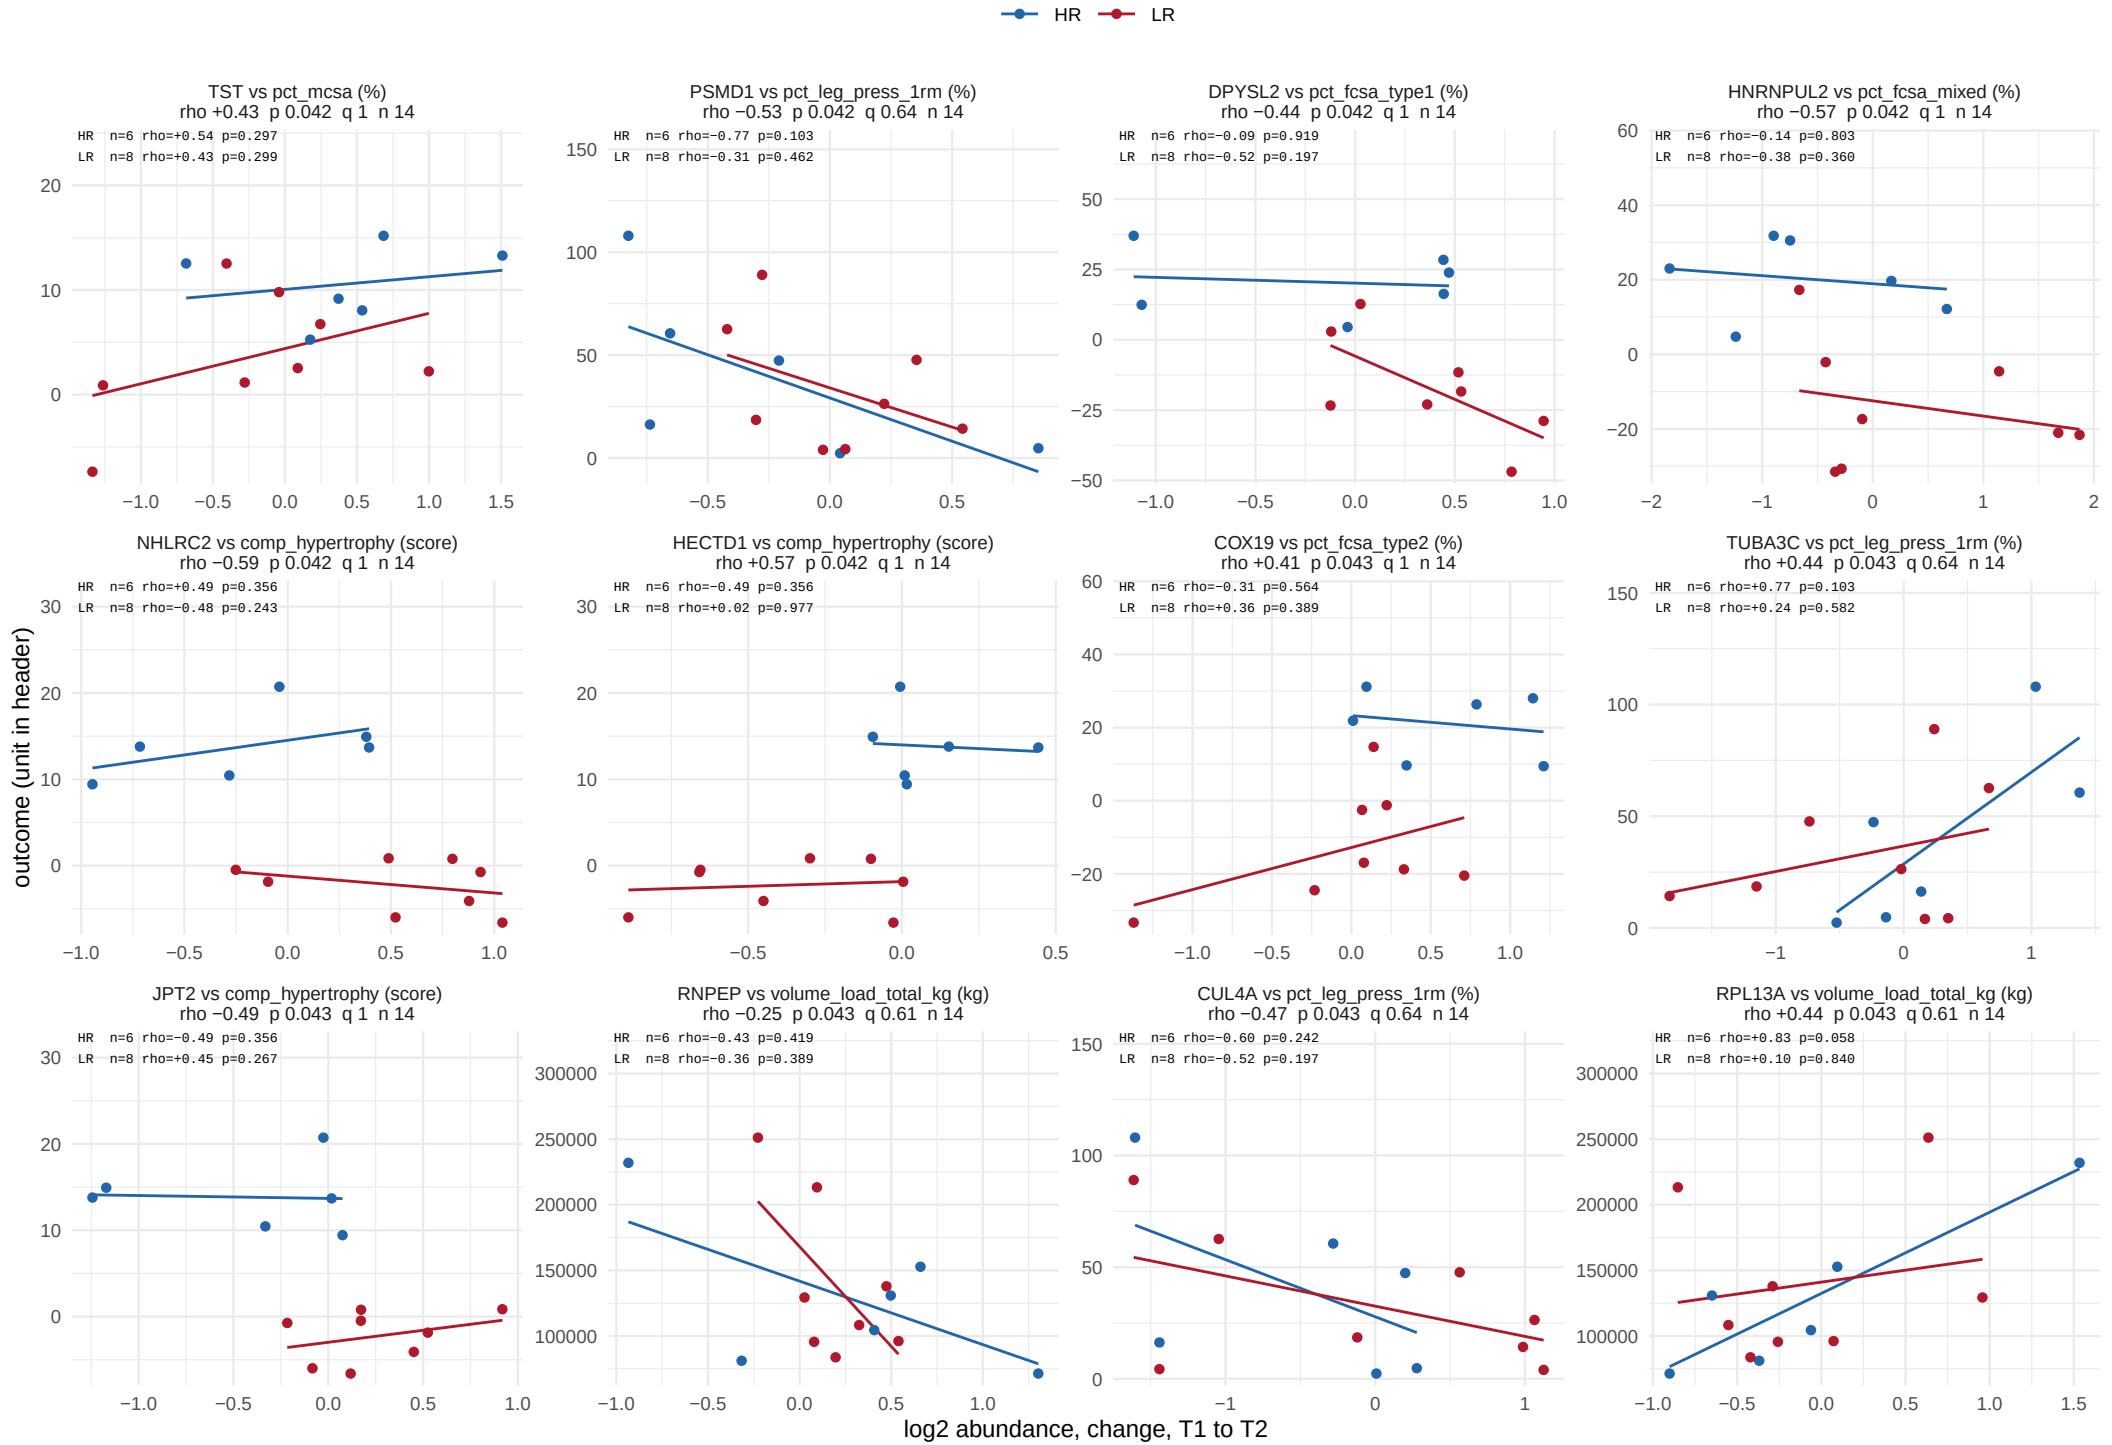

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


628 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 45 of 53.

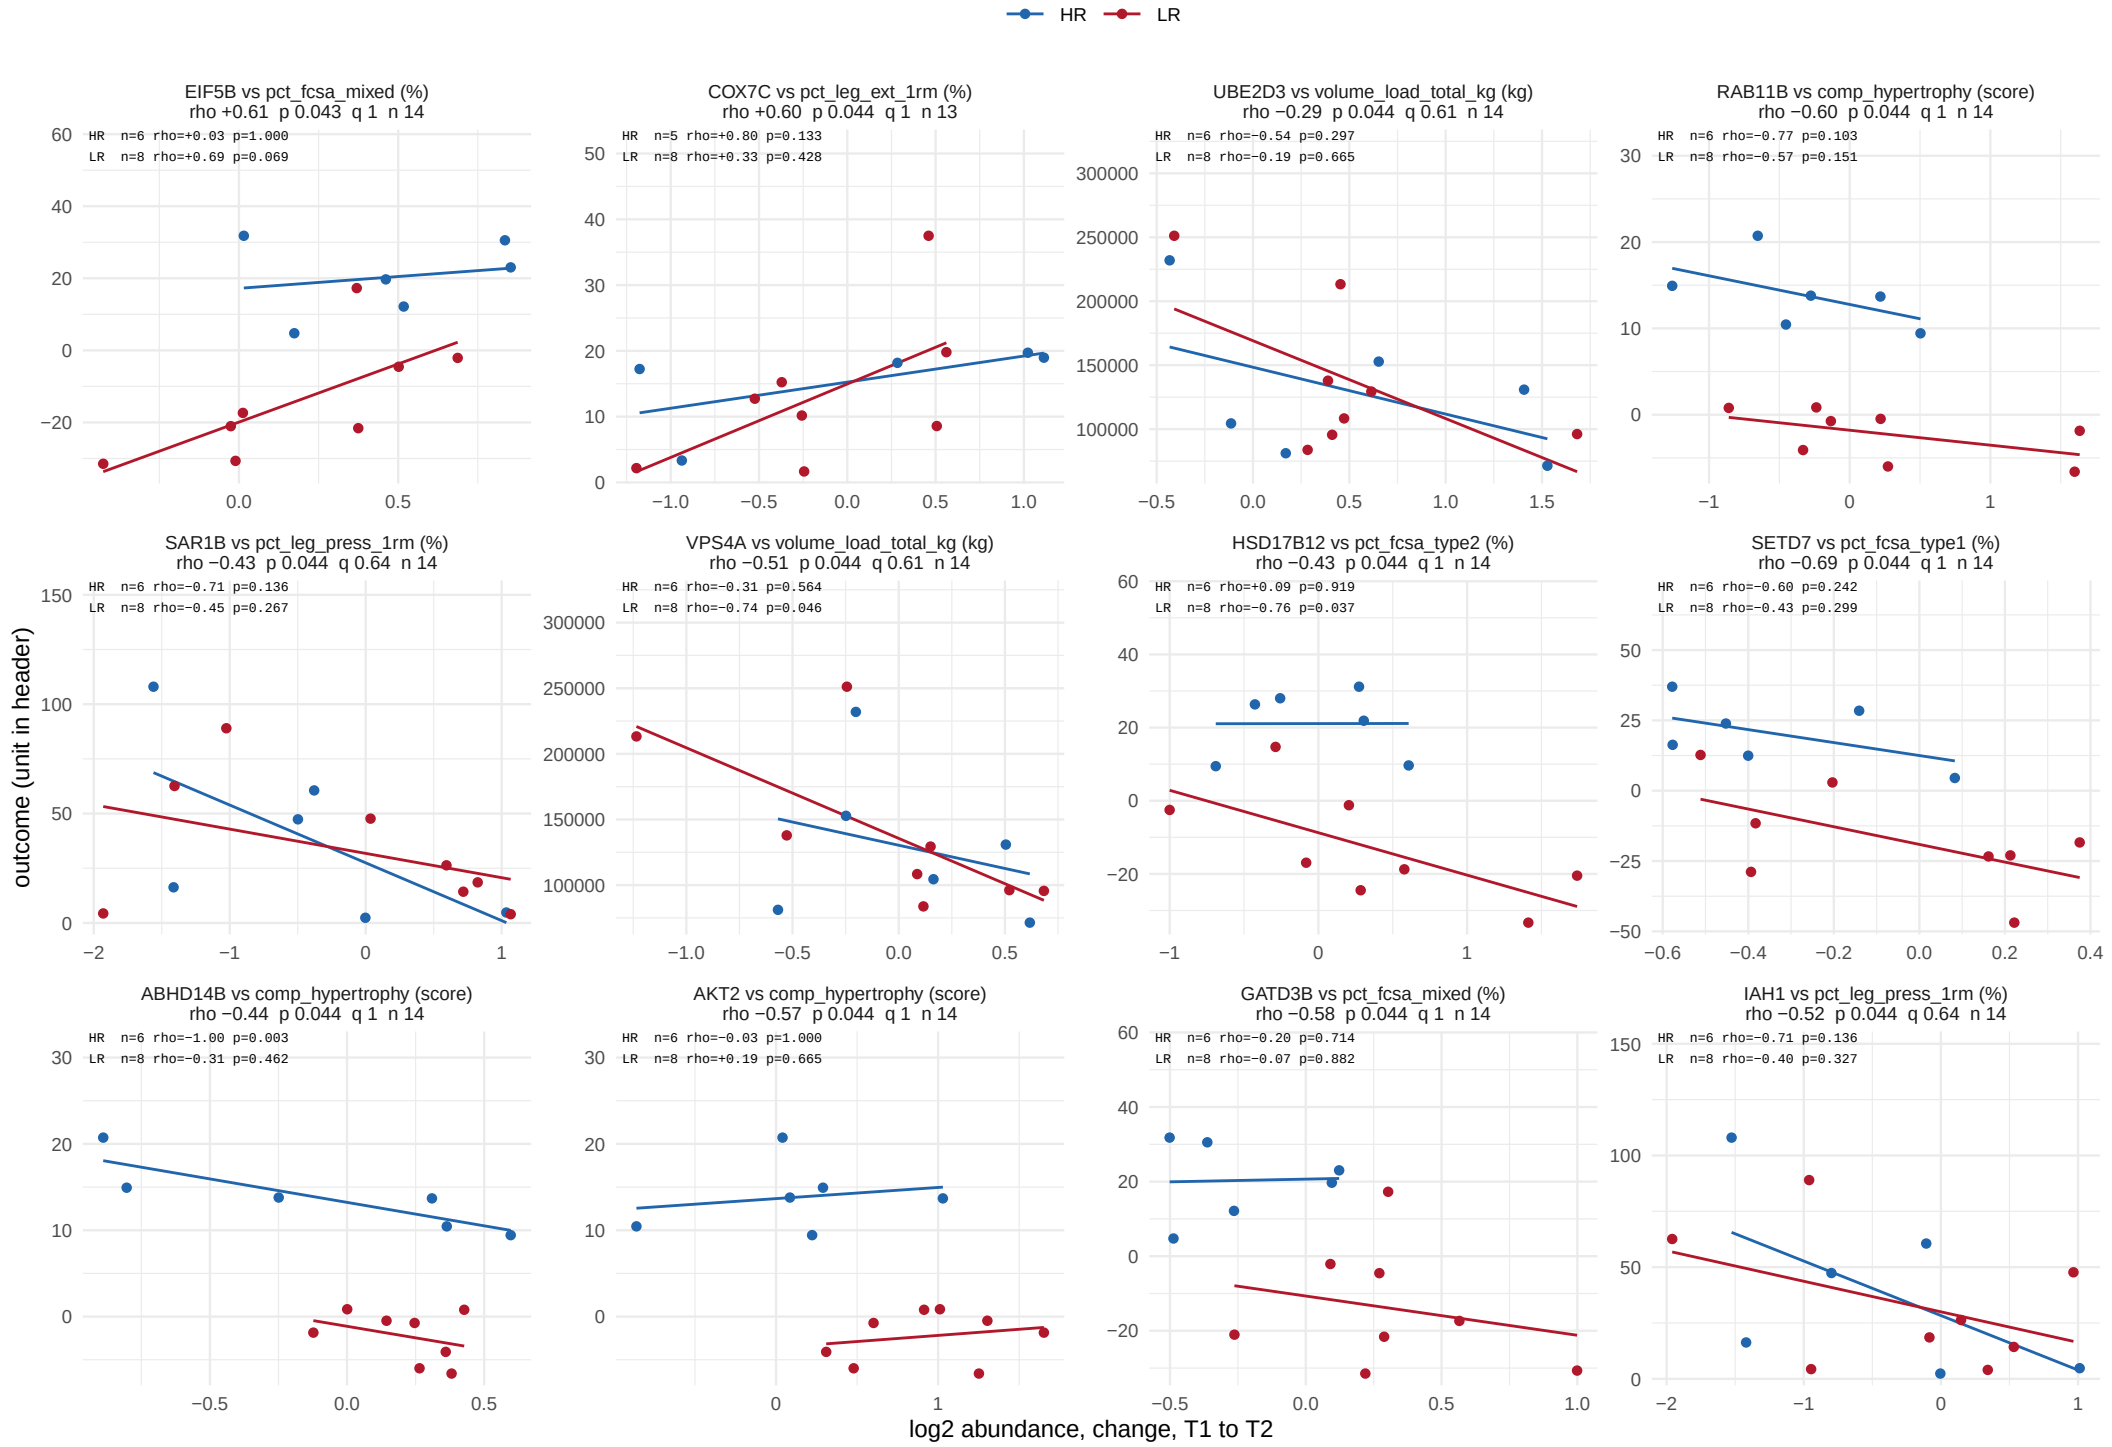

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


628 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 46 of 53.

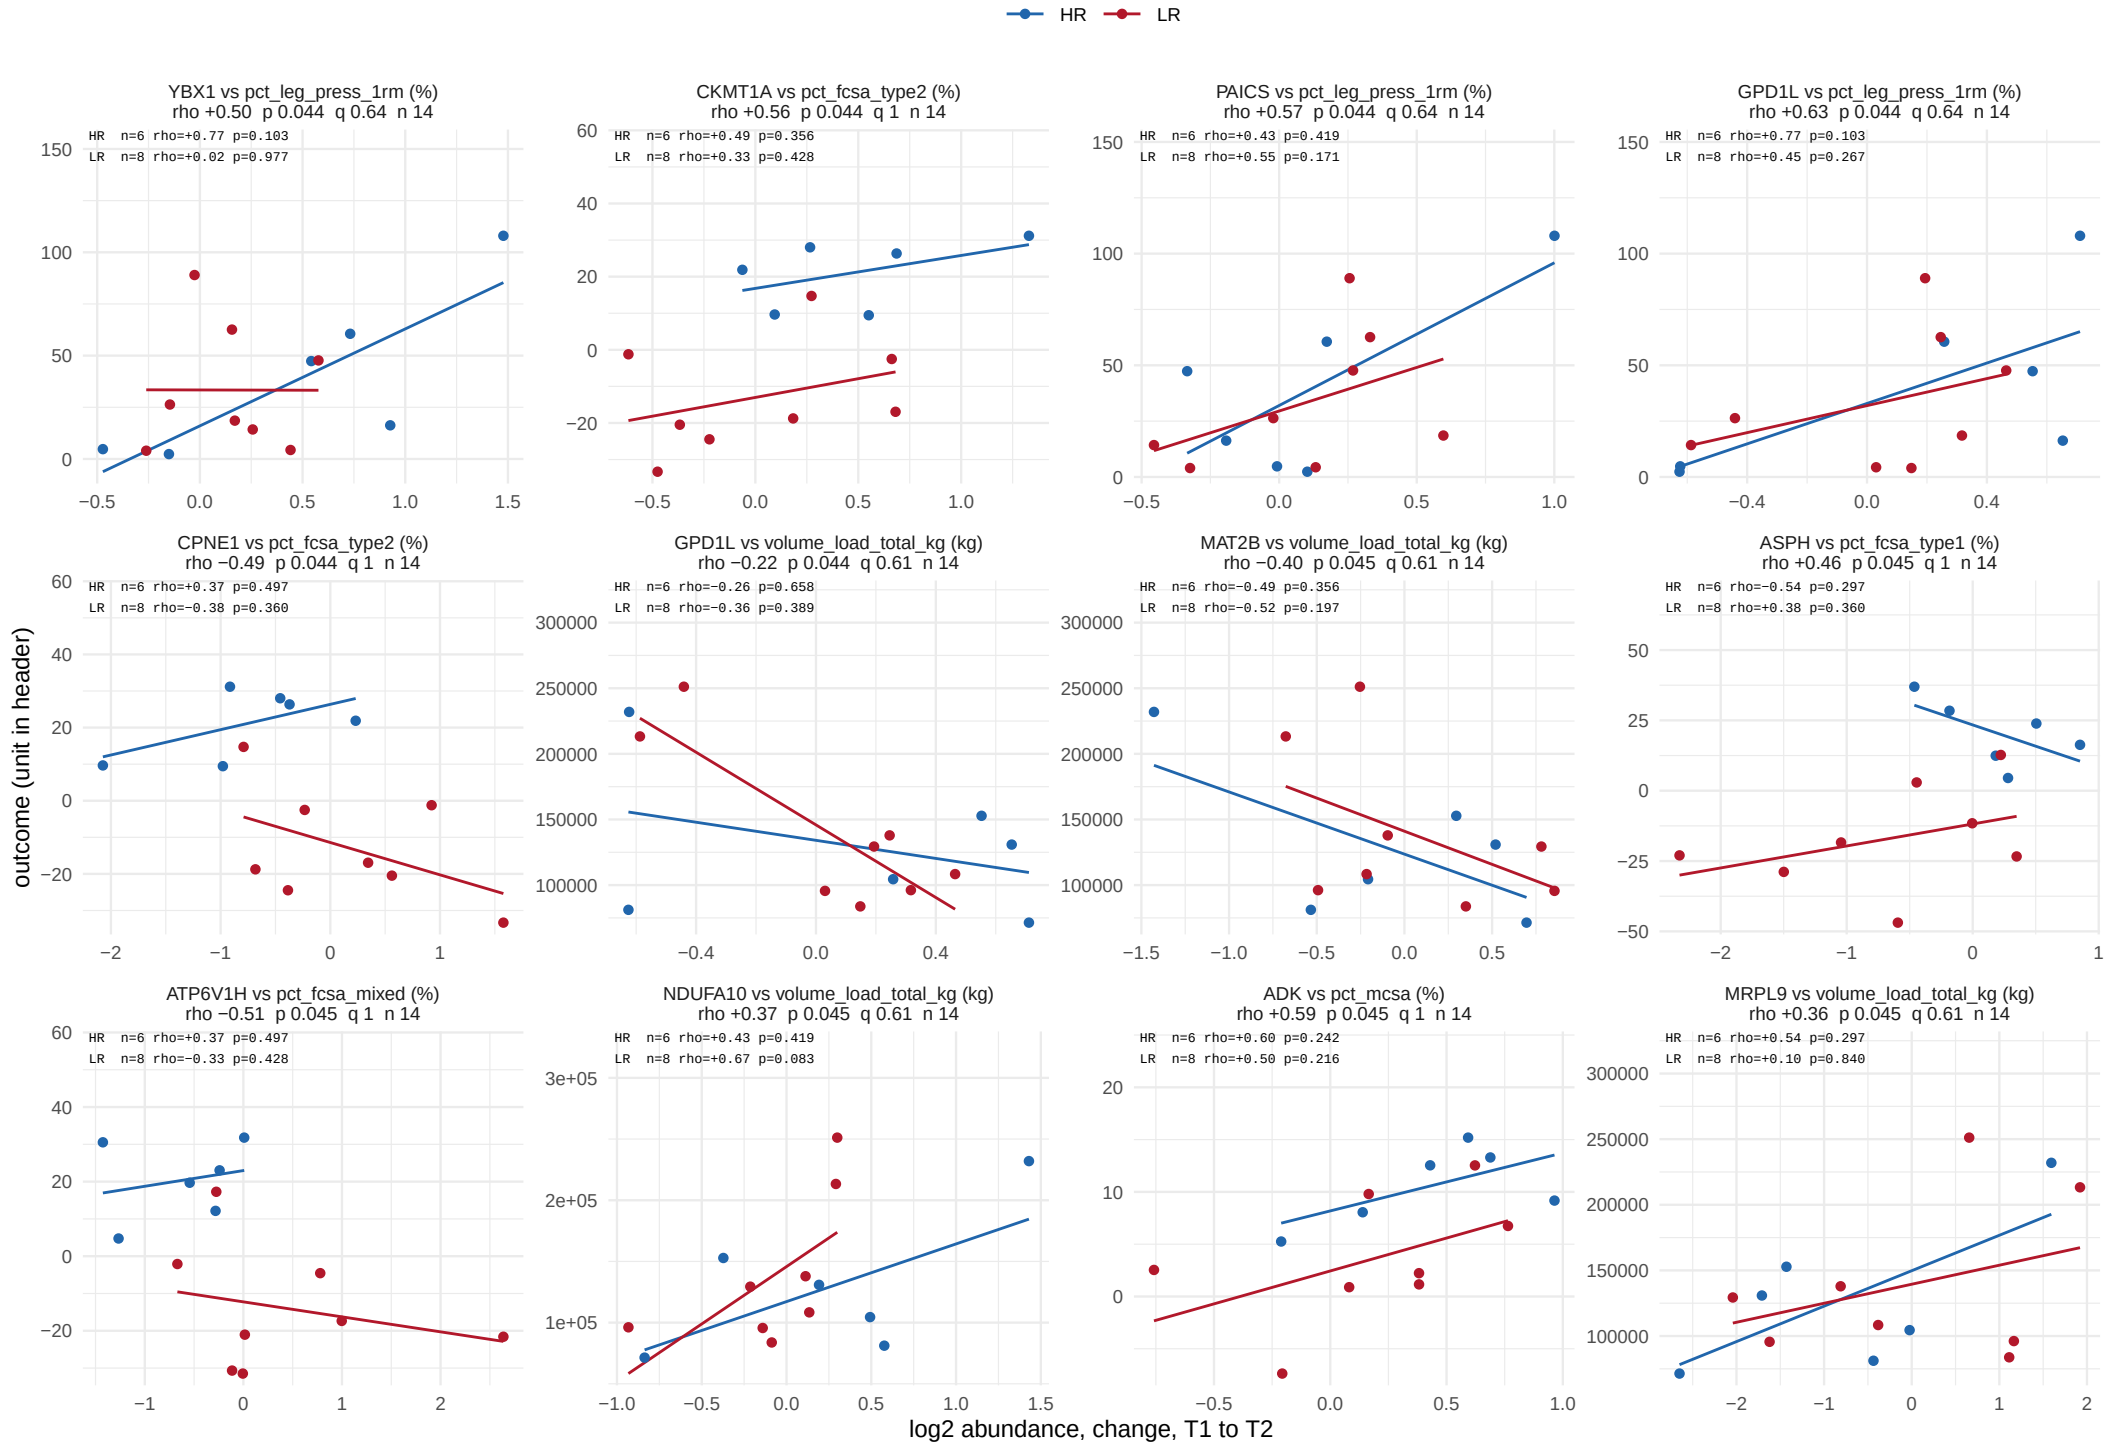

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


628 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 47 of 53.

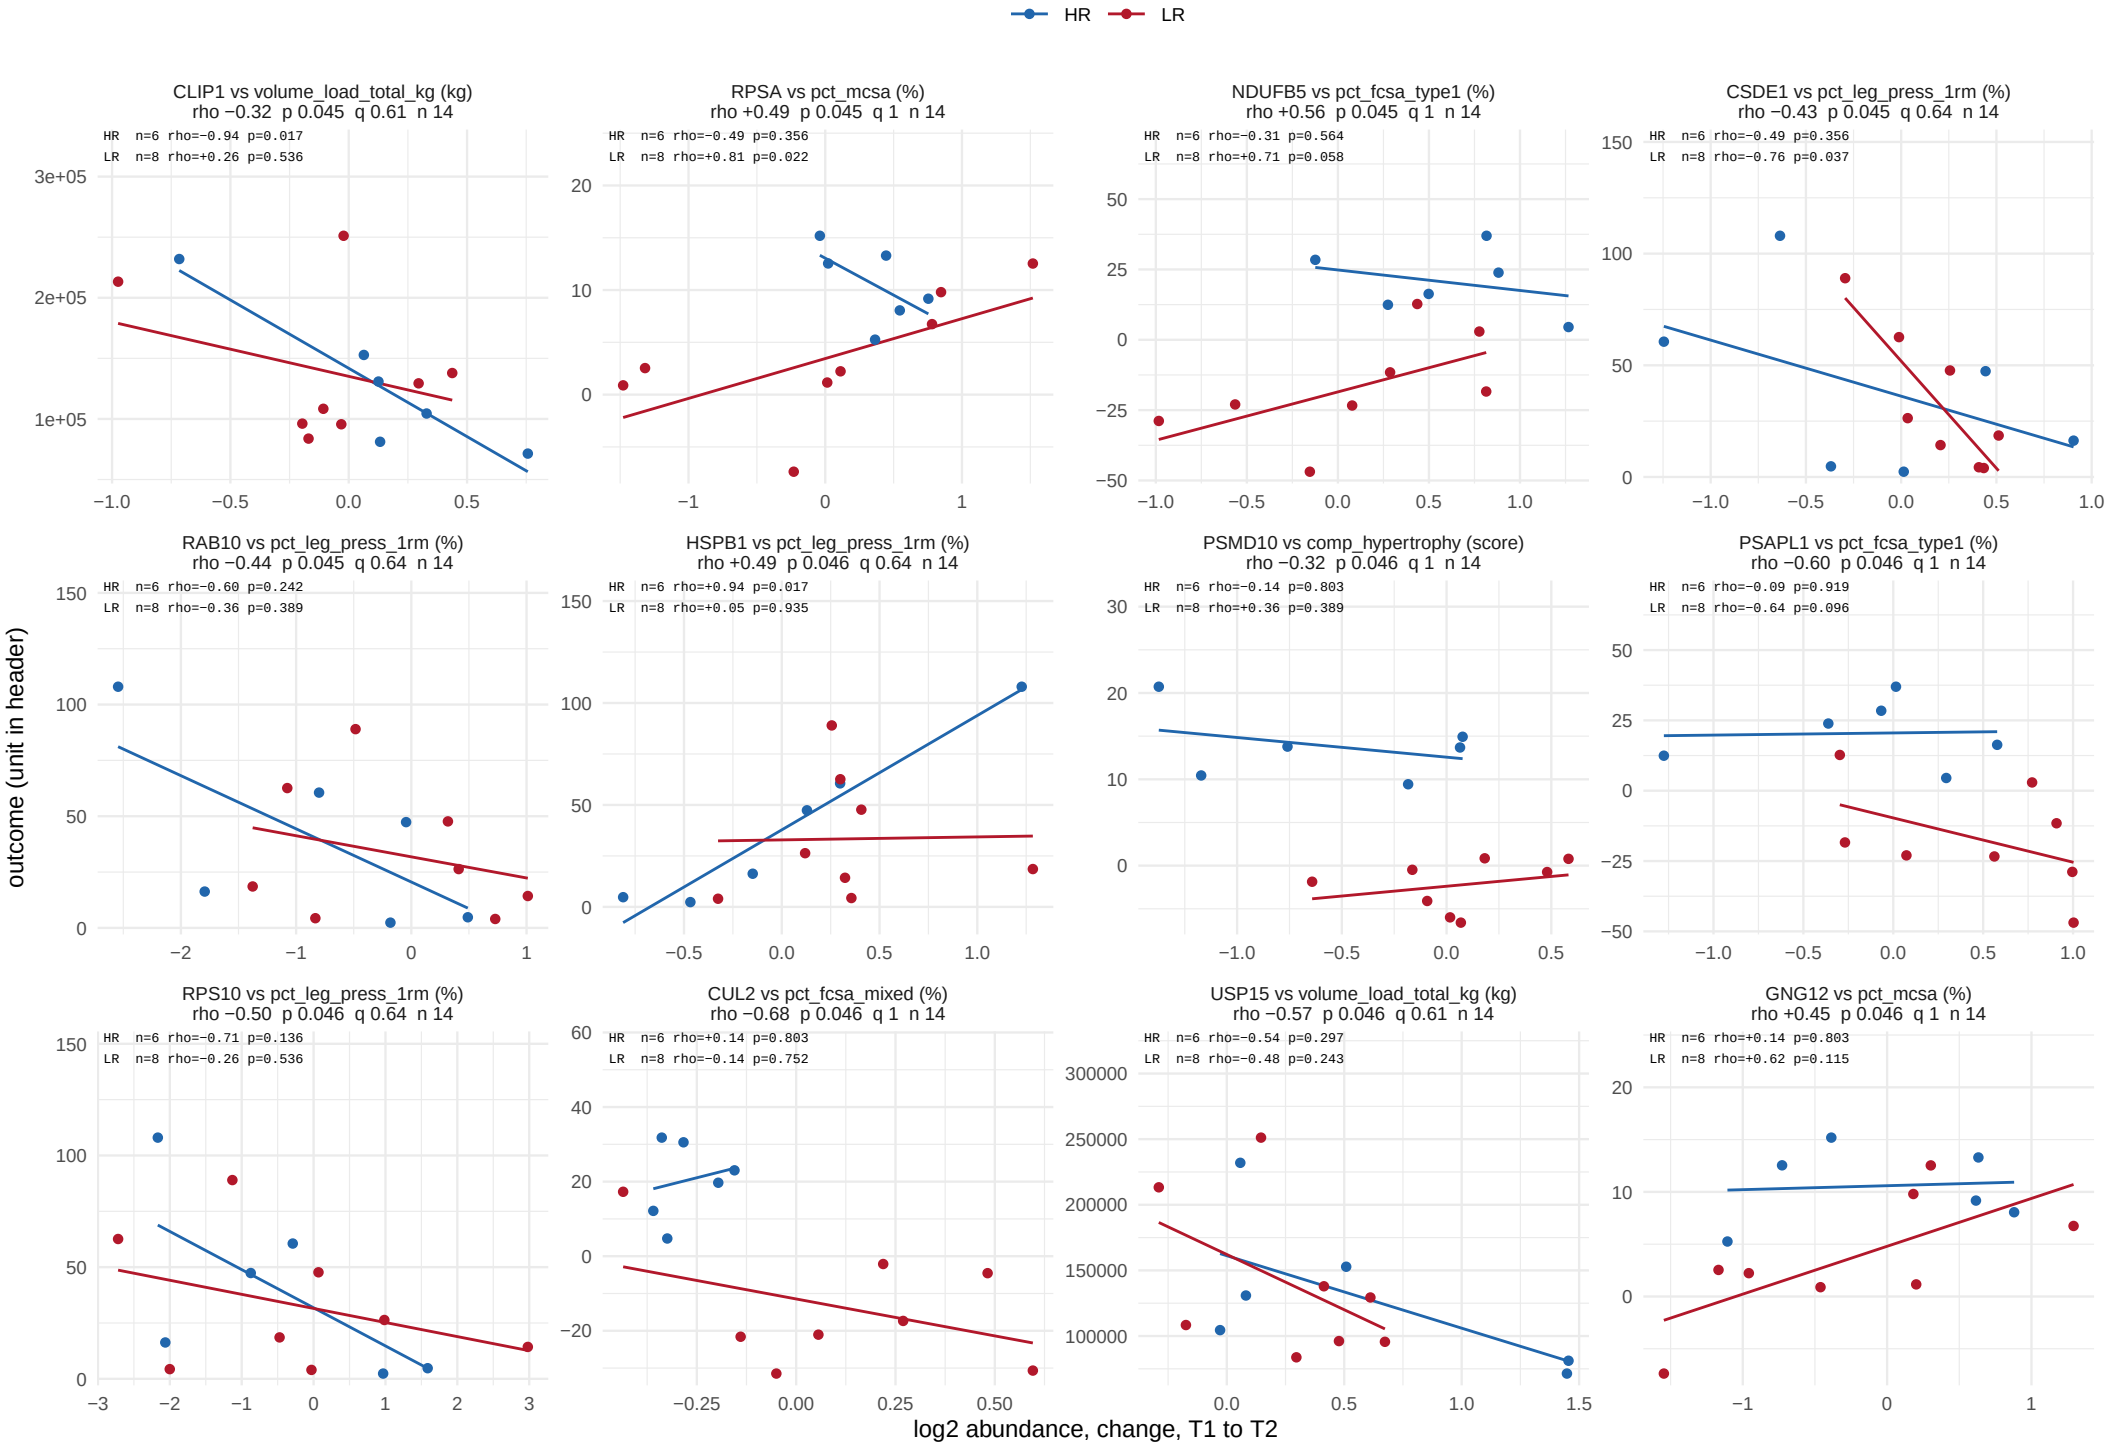

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


628 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 48 of 53.

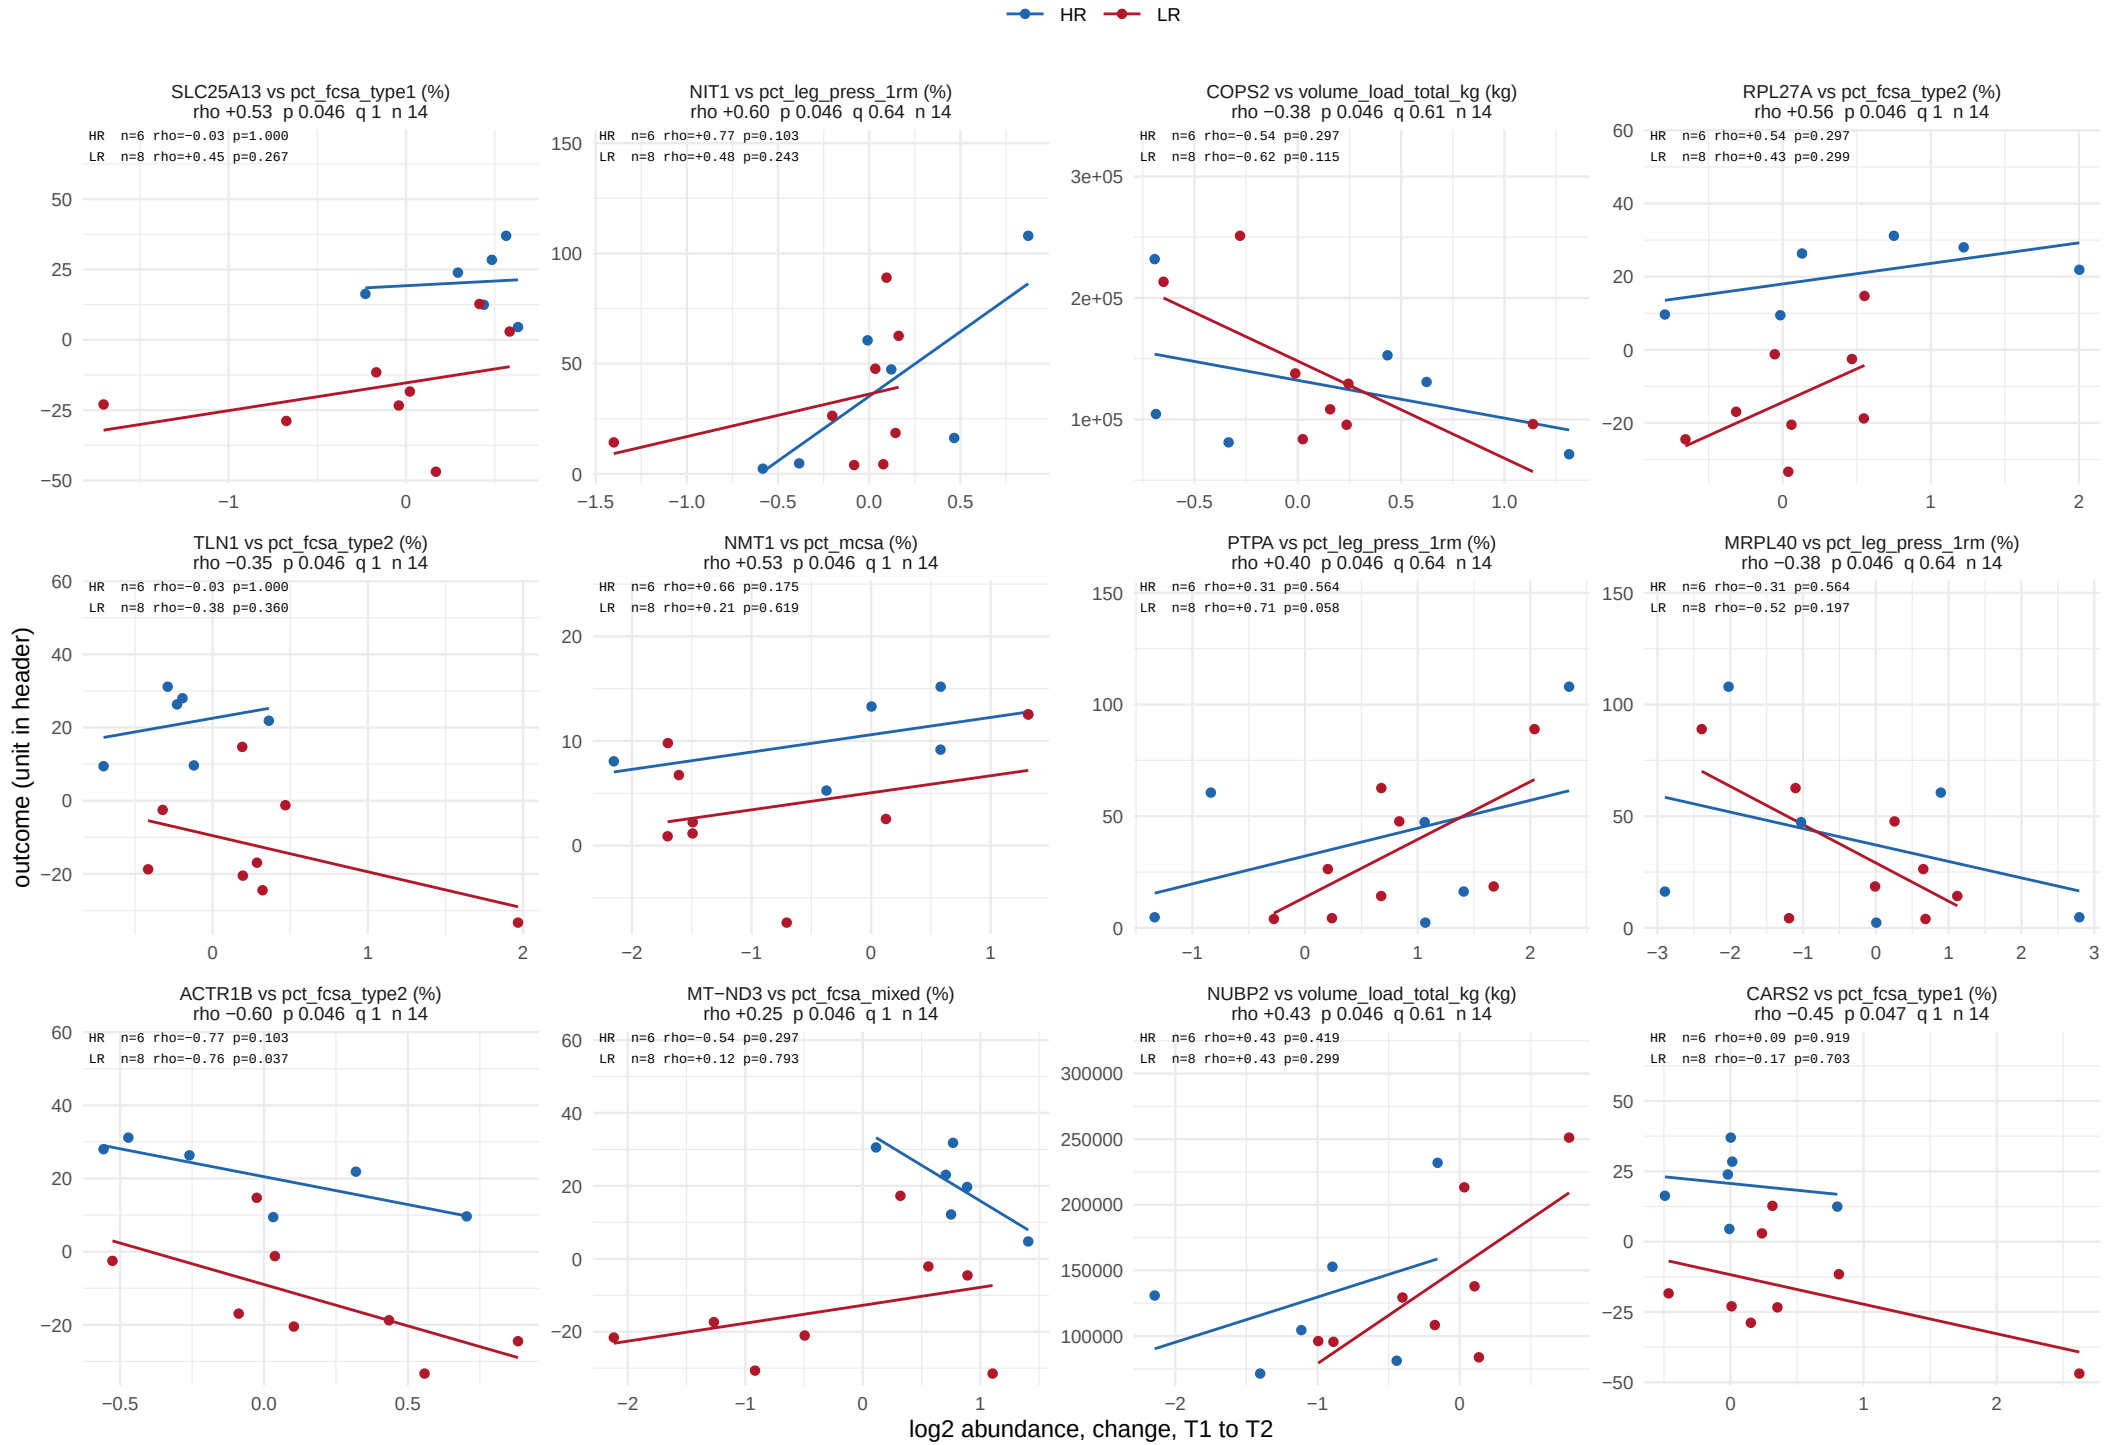

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


628 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 49 of 53.

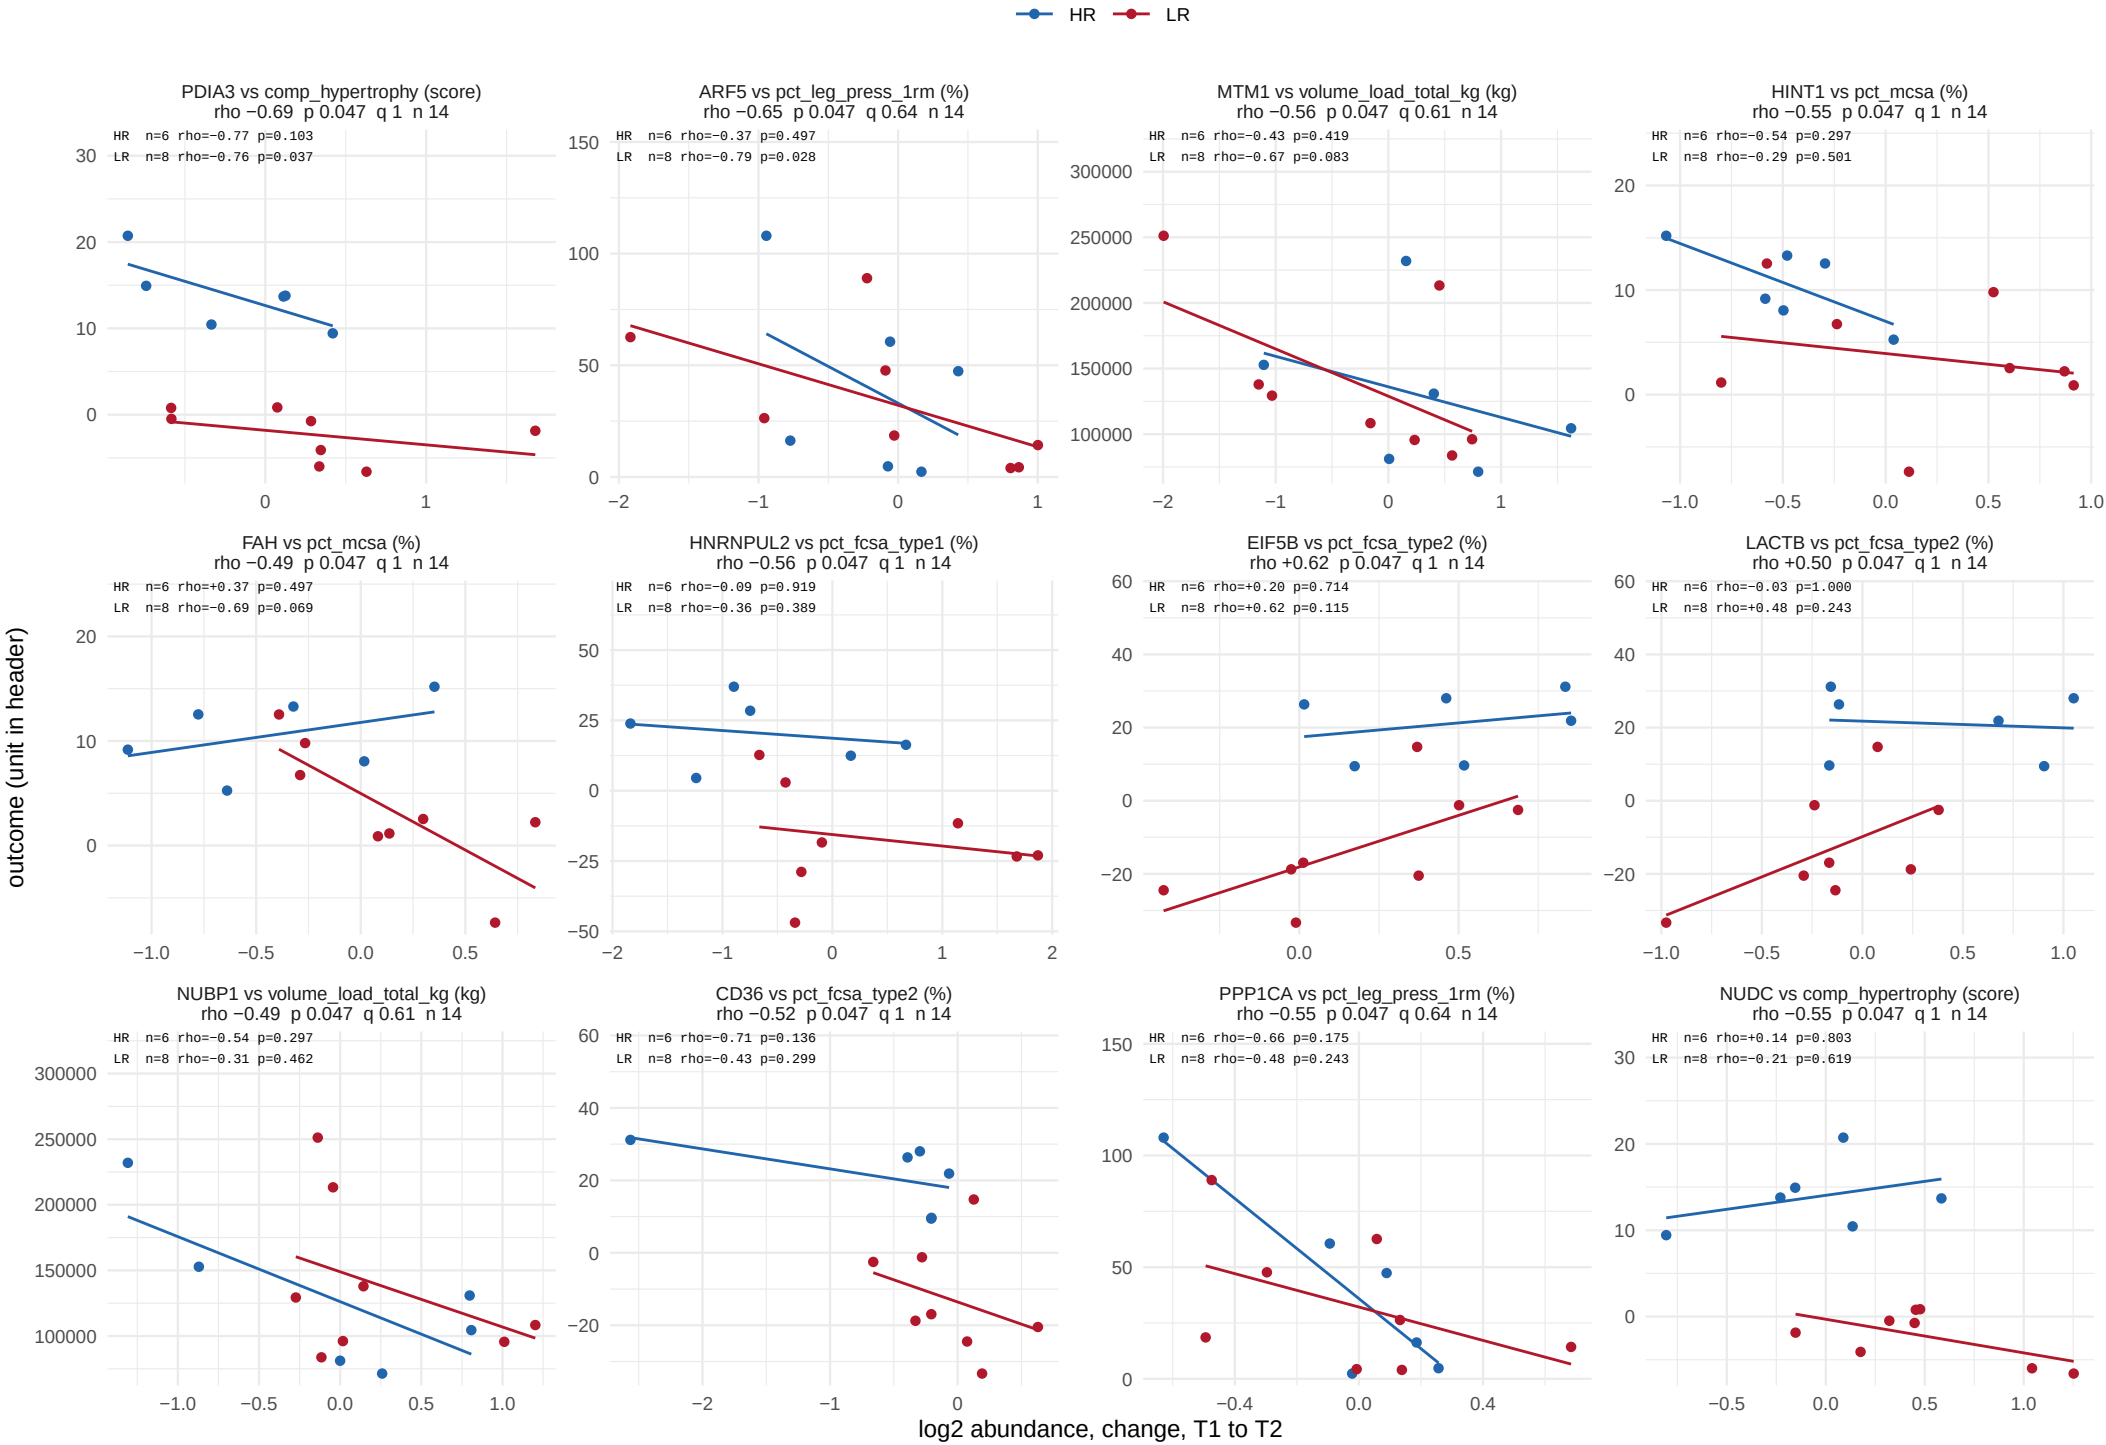

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


628 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 50 of 53.

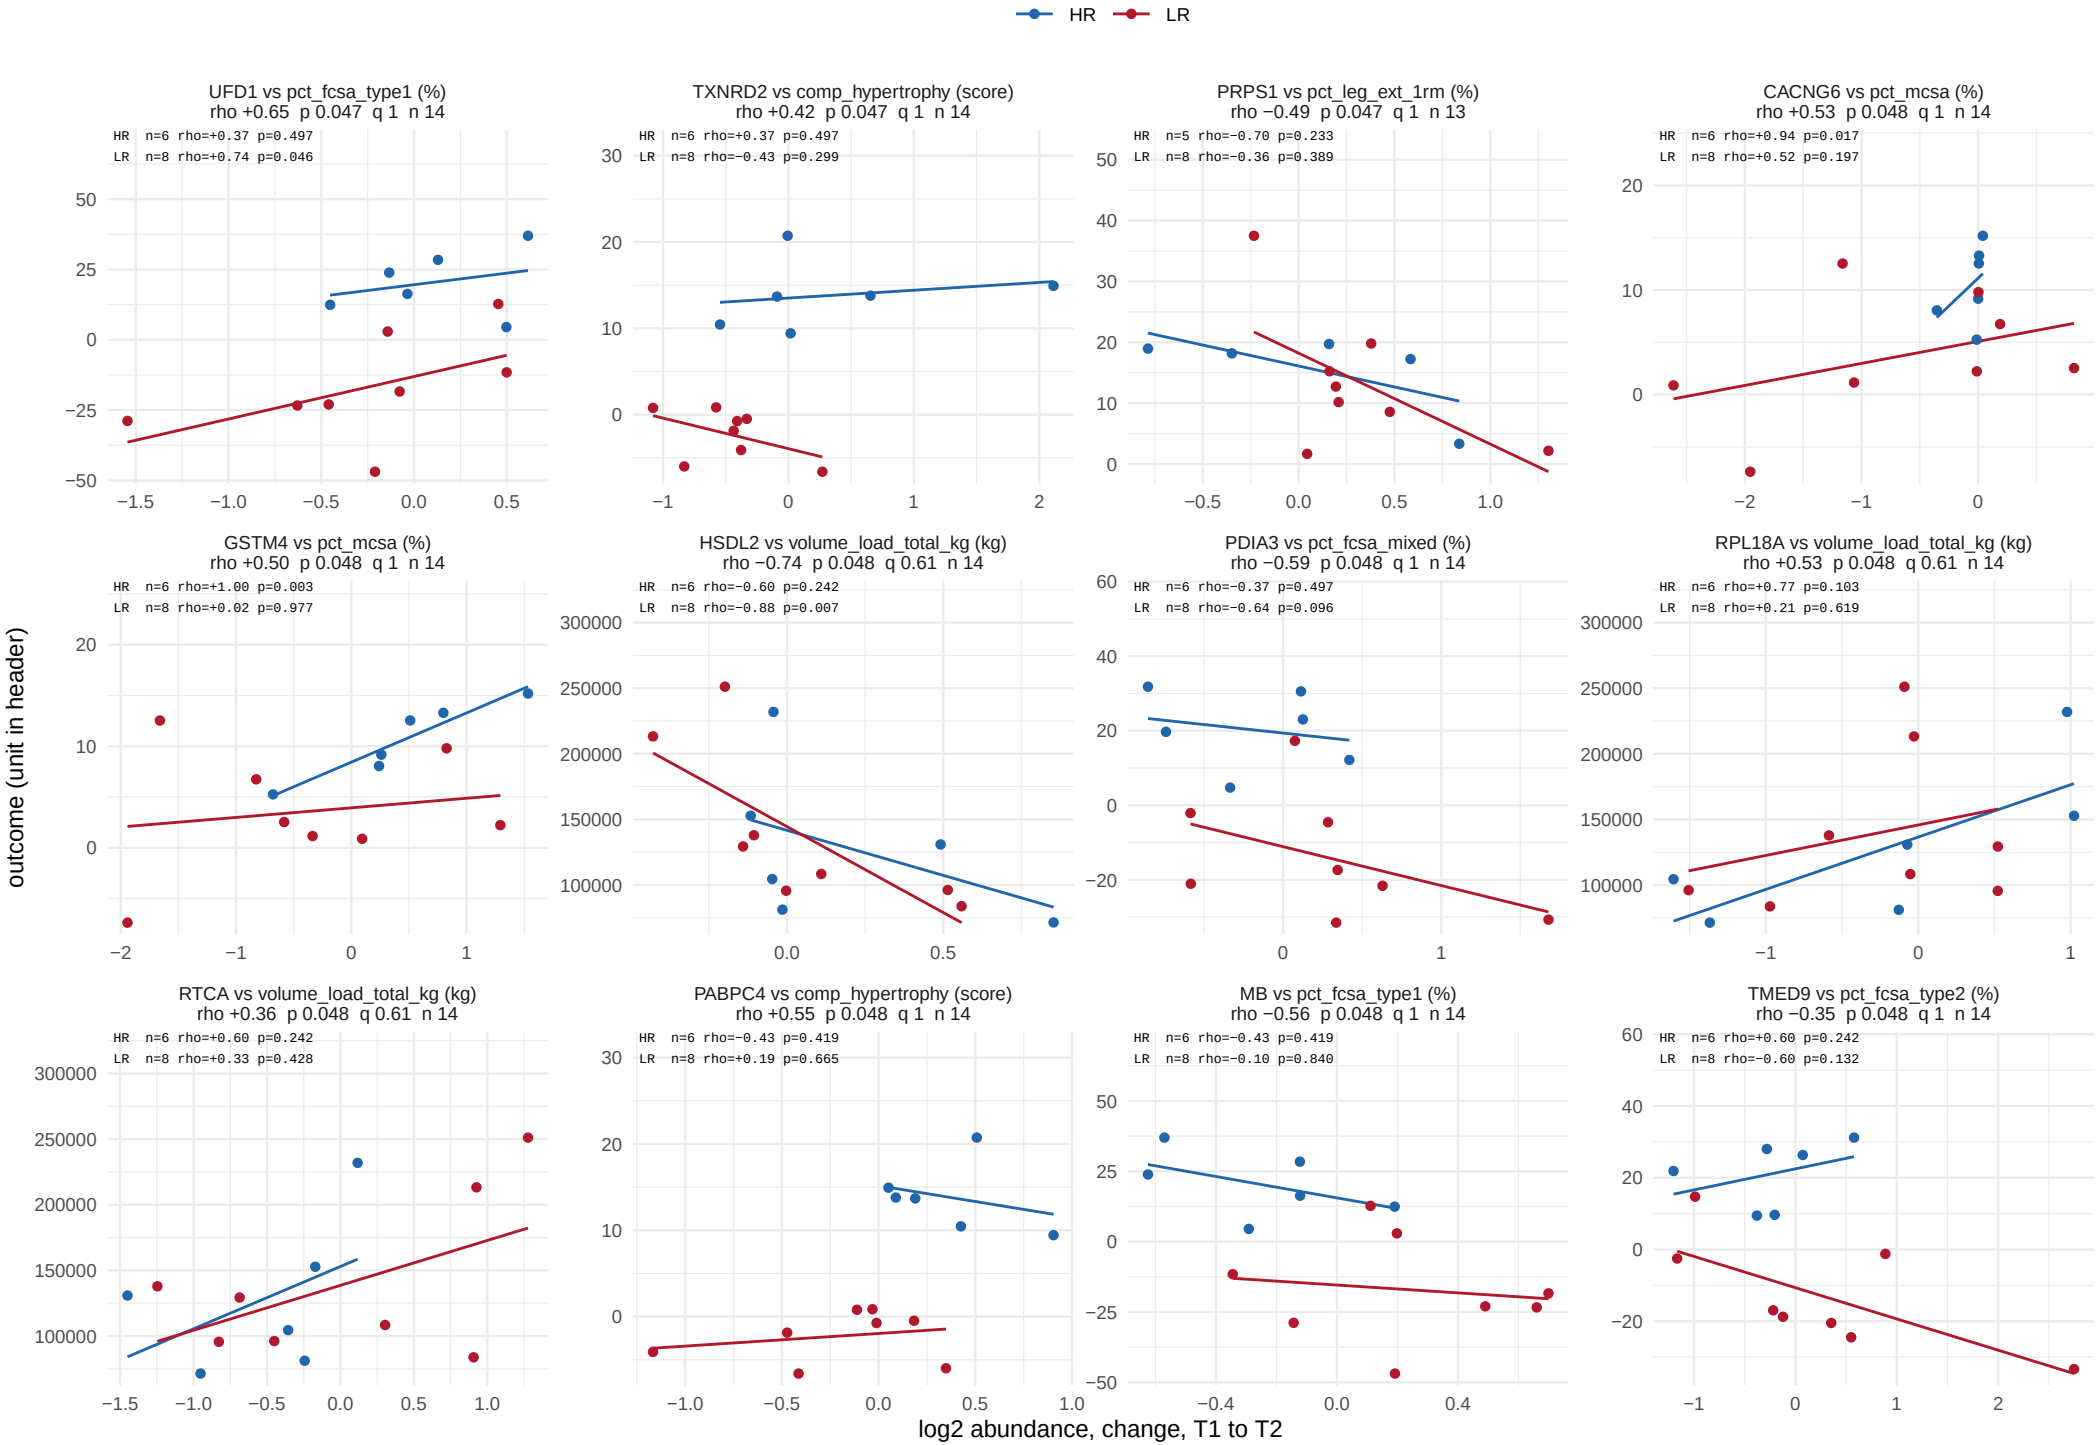

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


628 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 51 of 53.

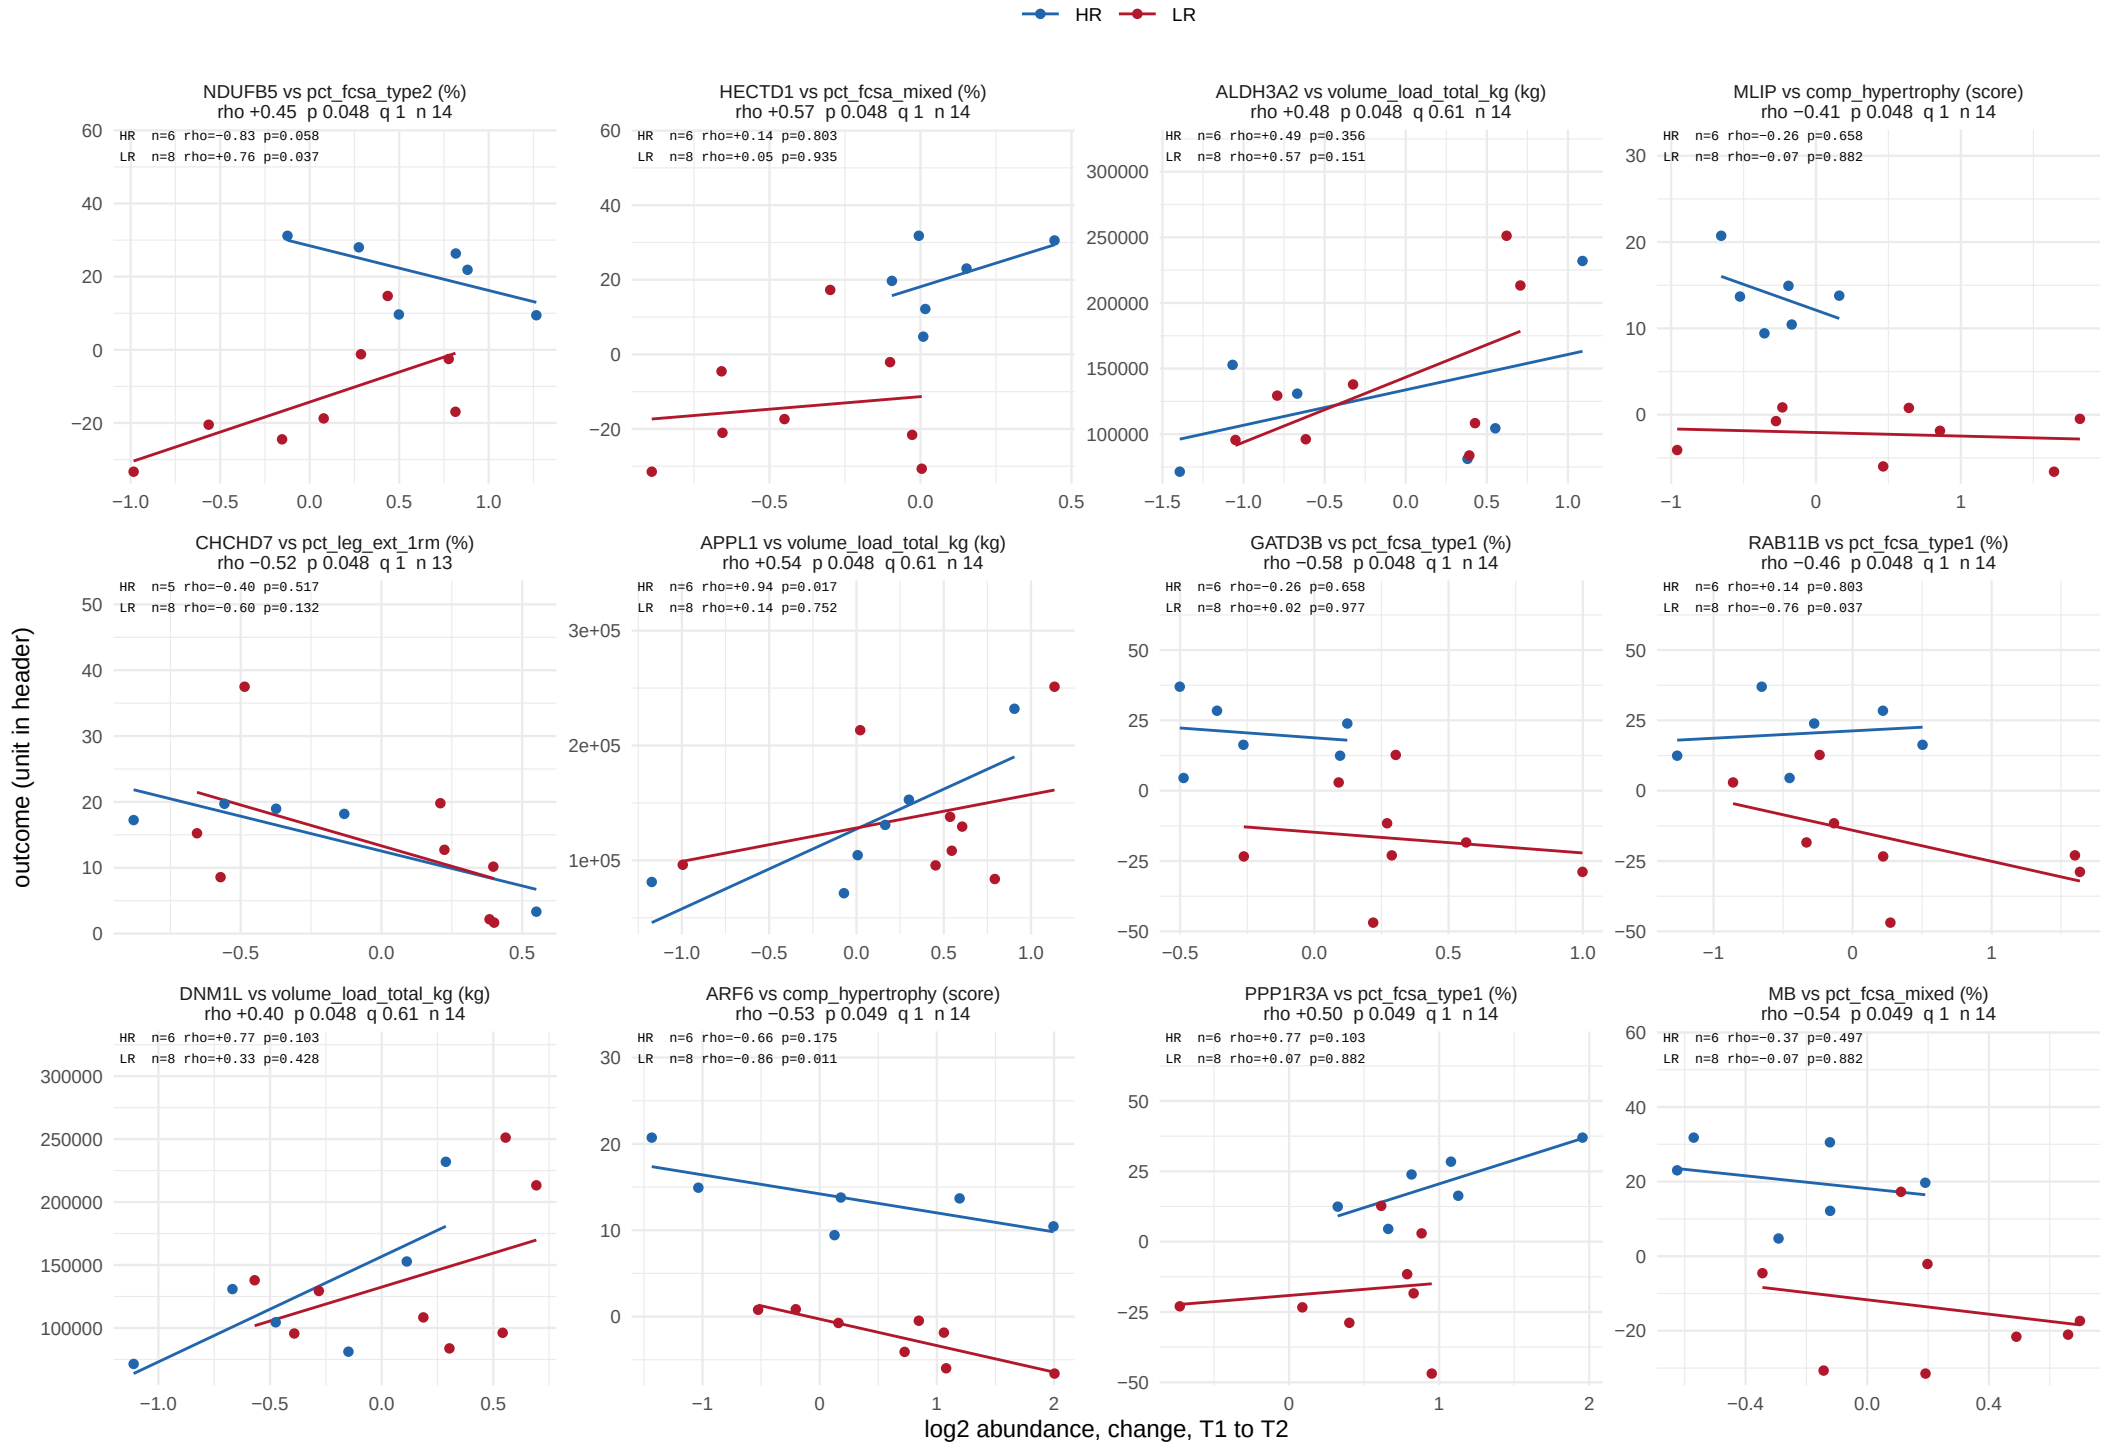

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


628 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 52 of 53.

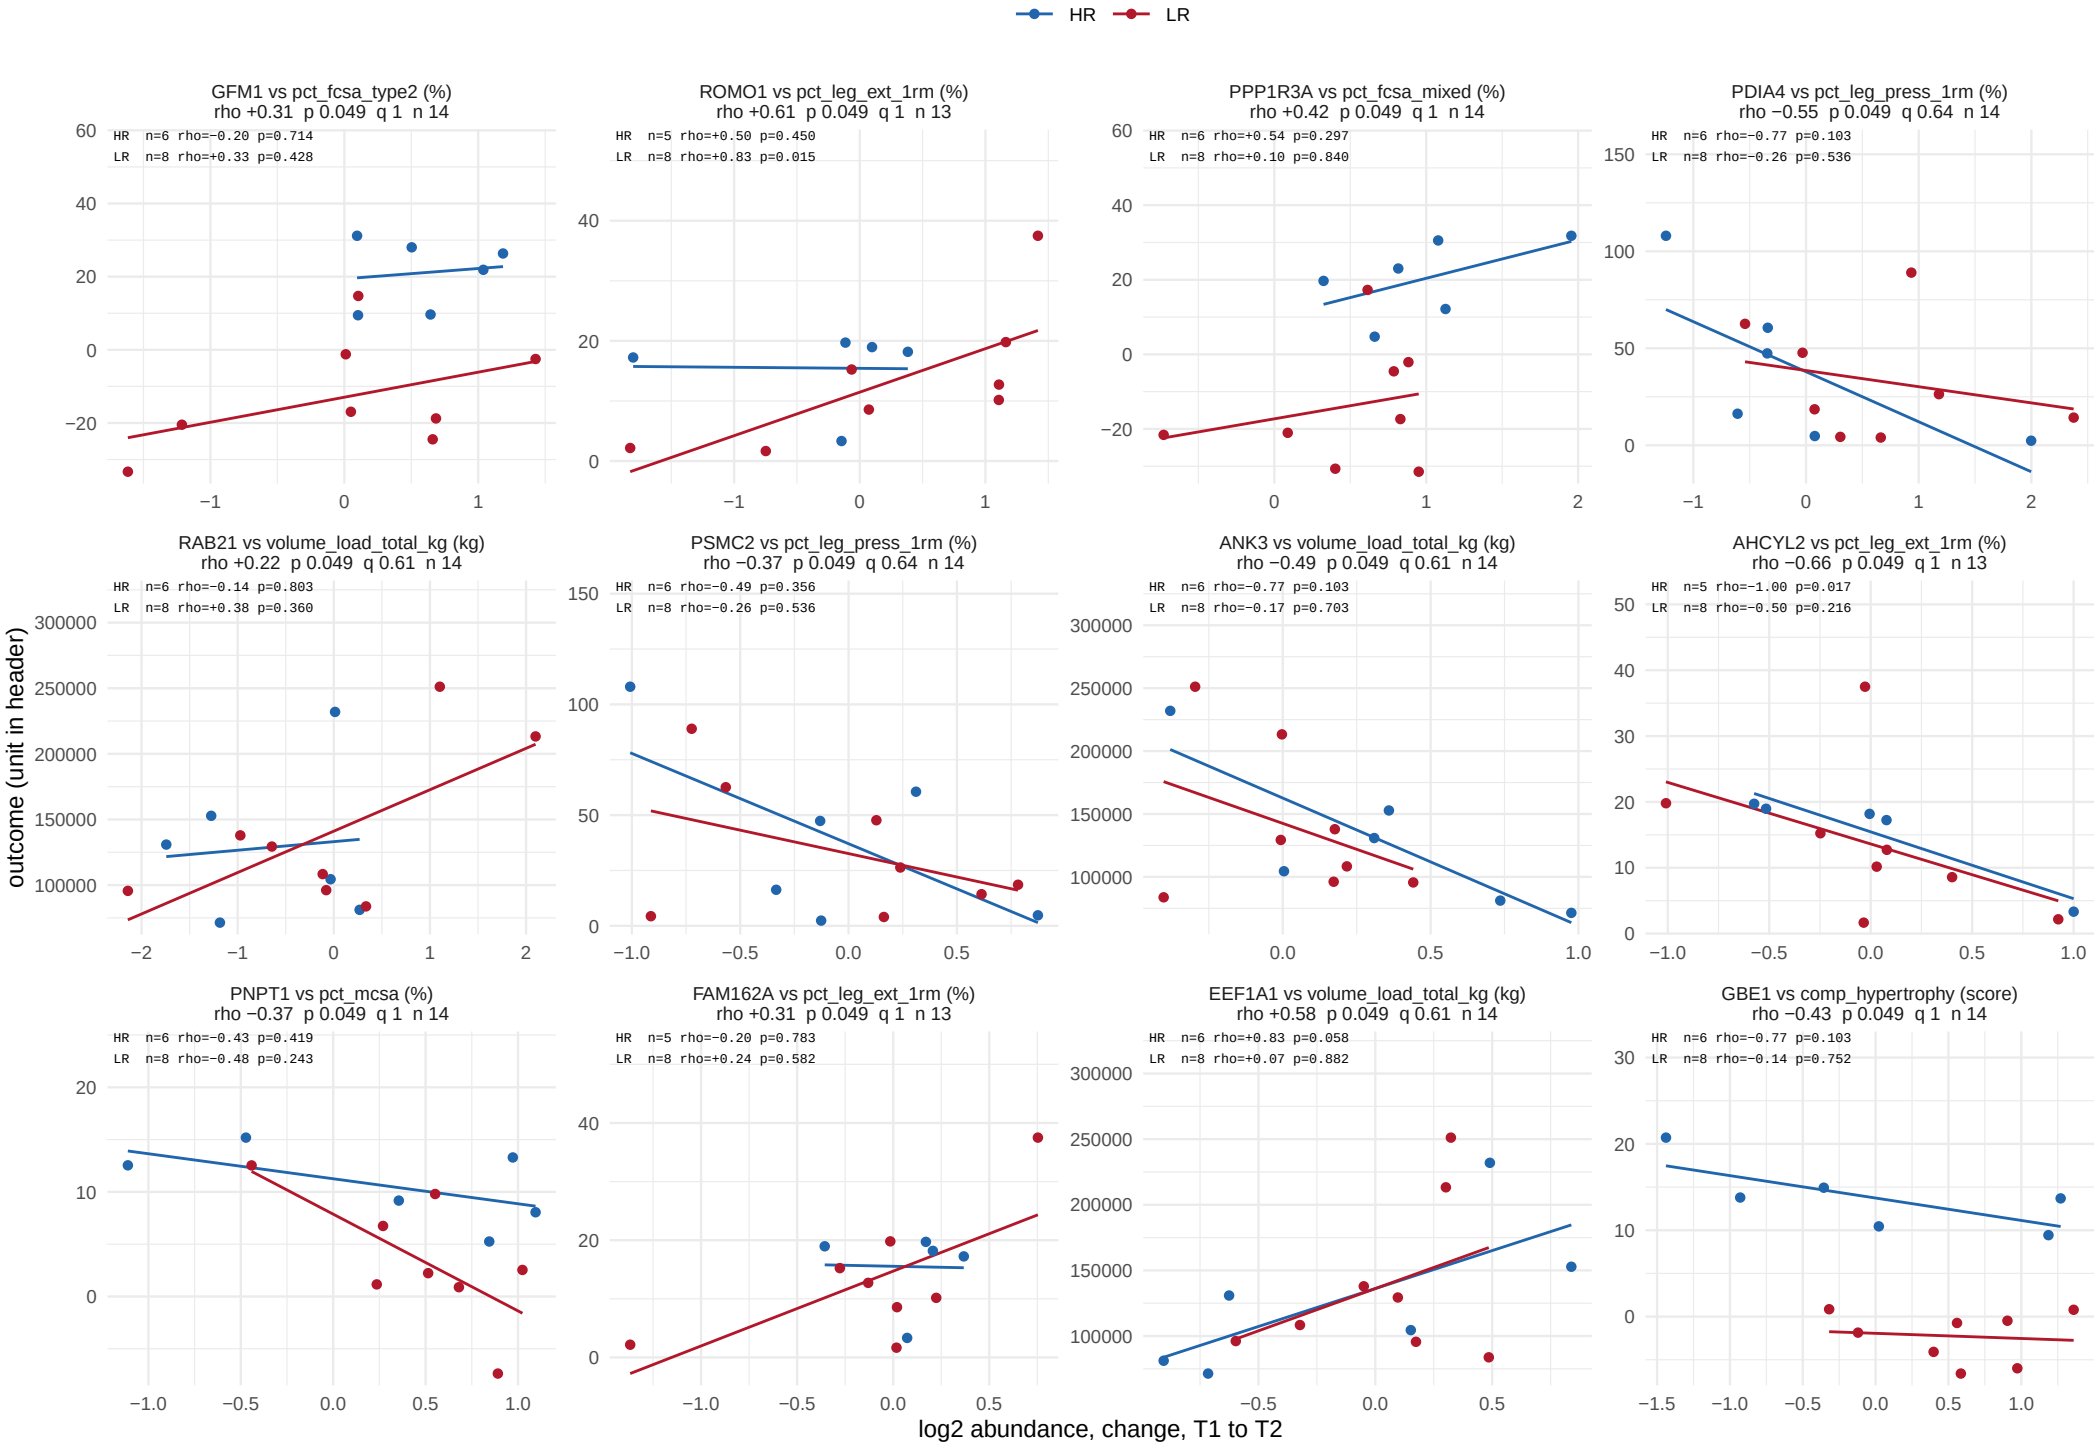

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


628 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 53 of 53.

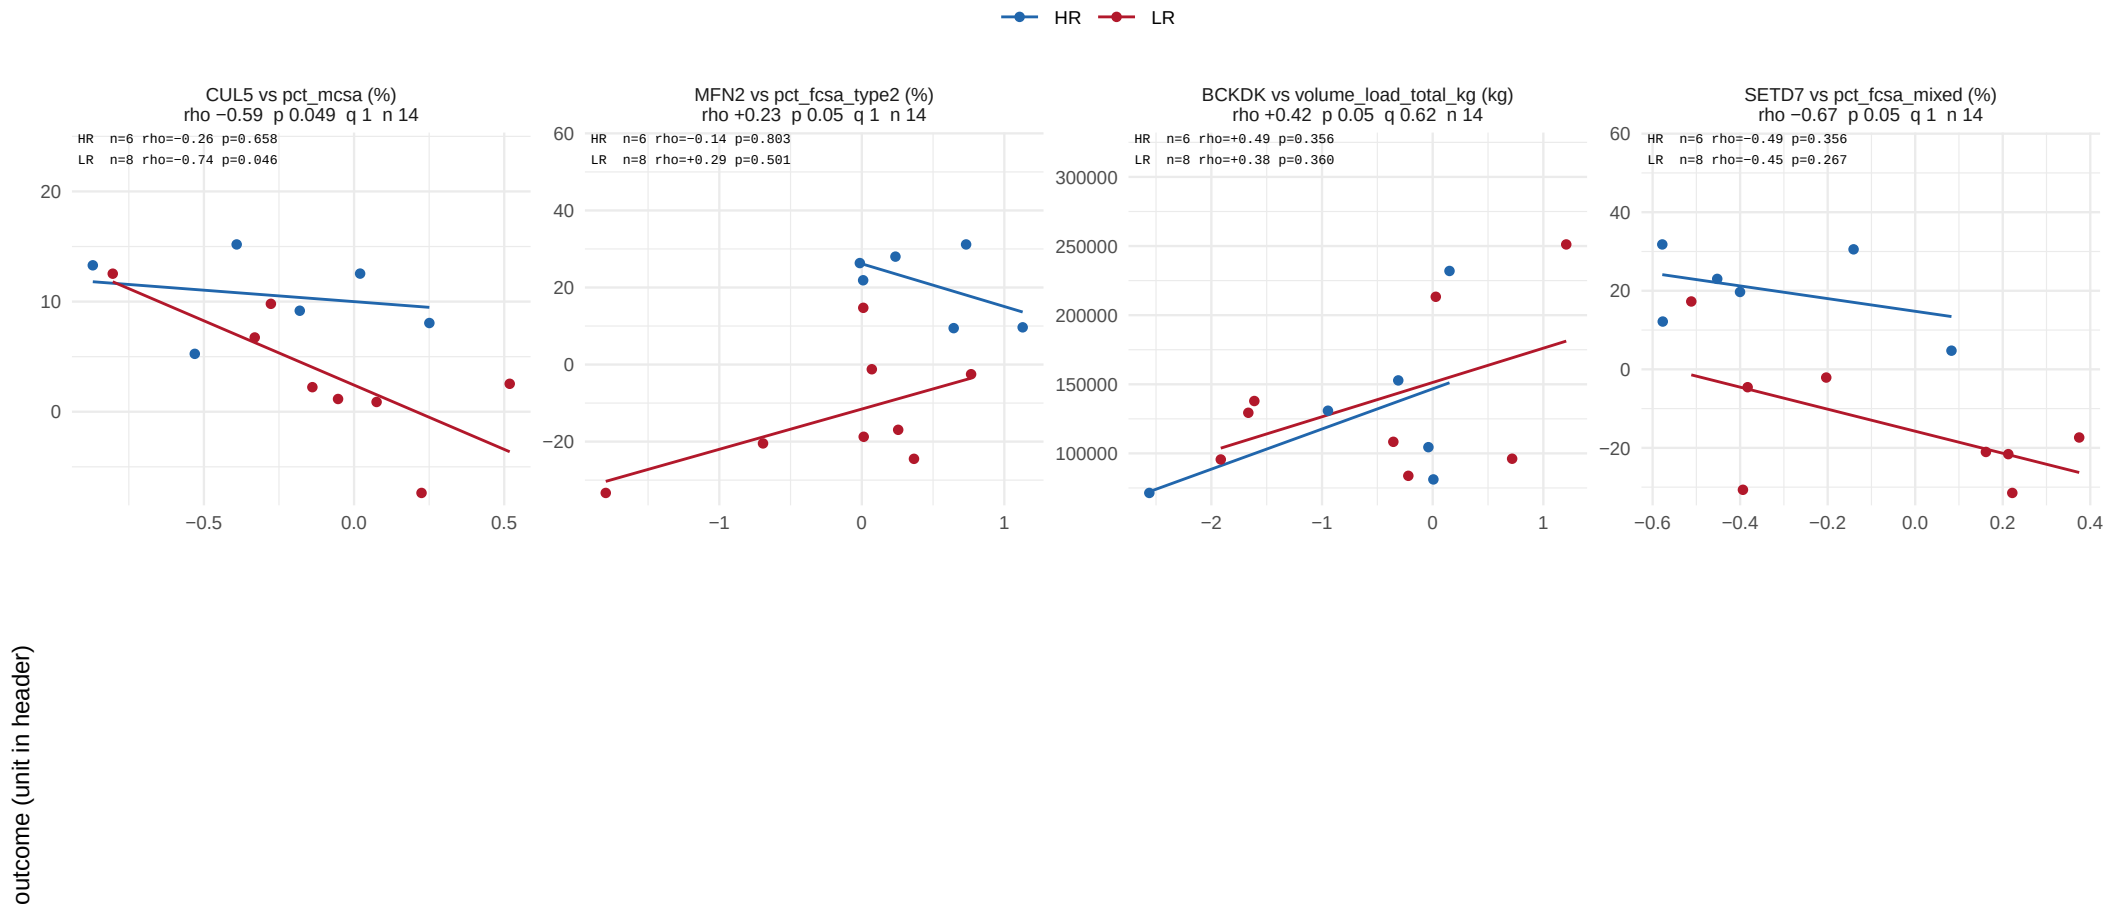

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


695 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 1 of 58.

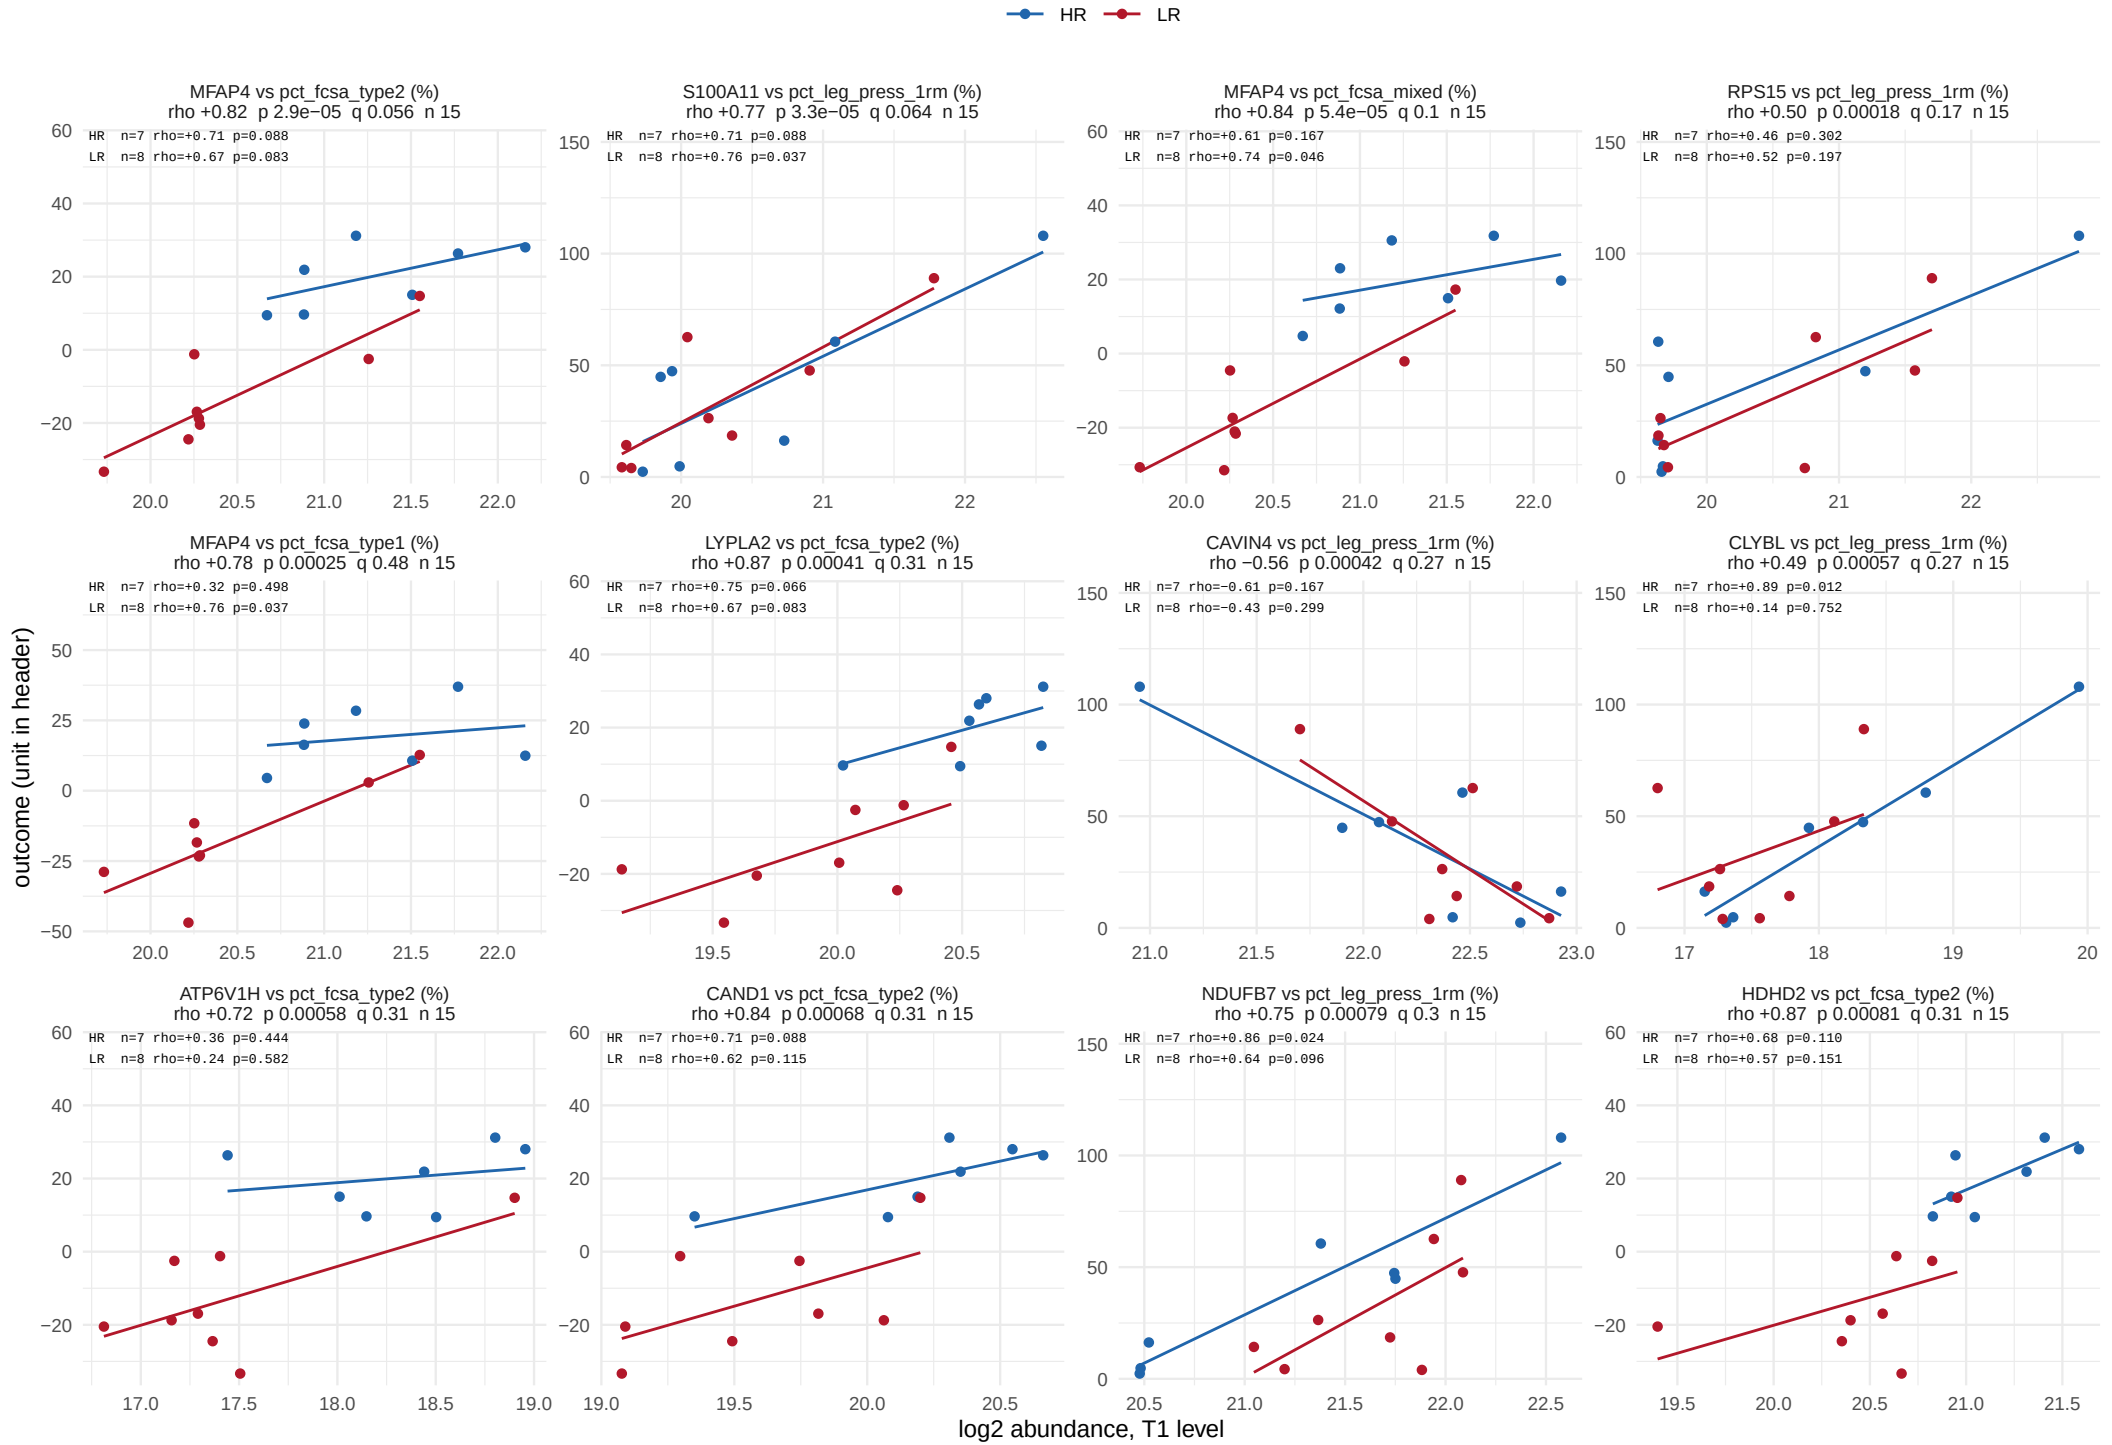

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window

695 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 2 of 58.

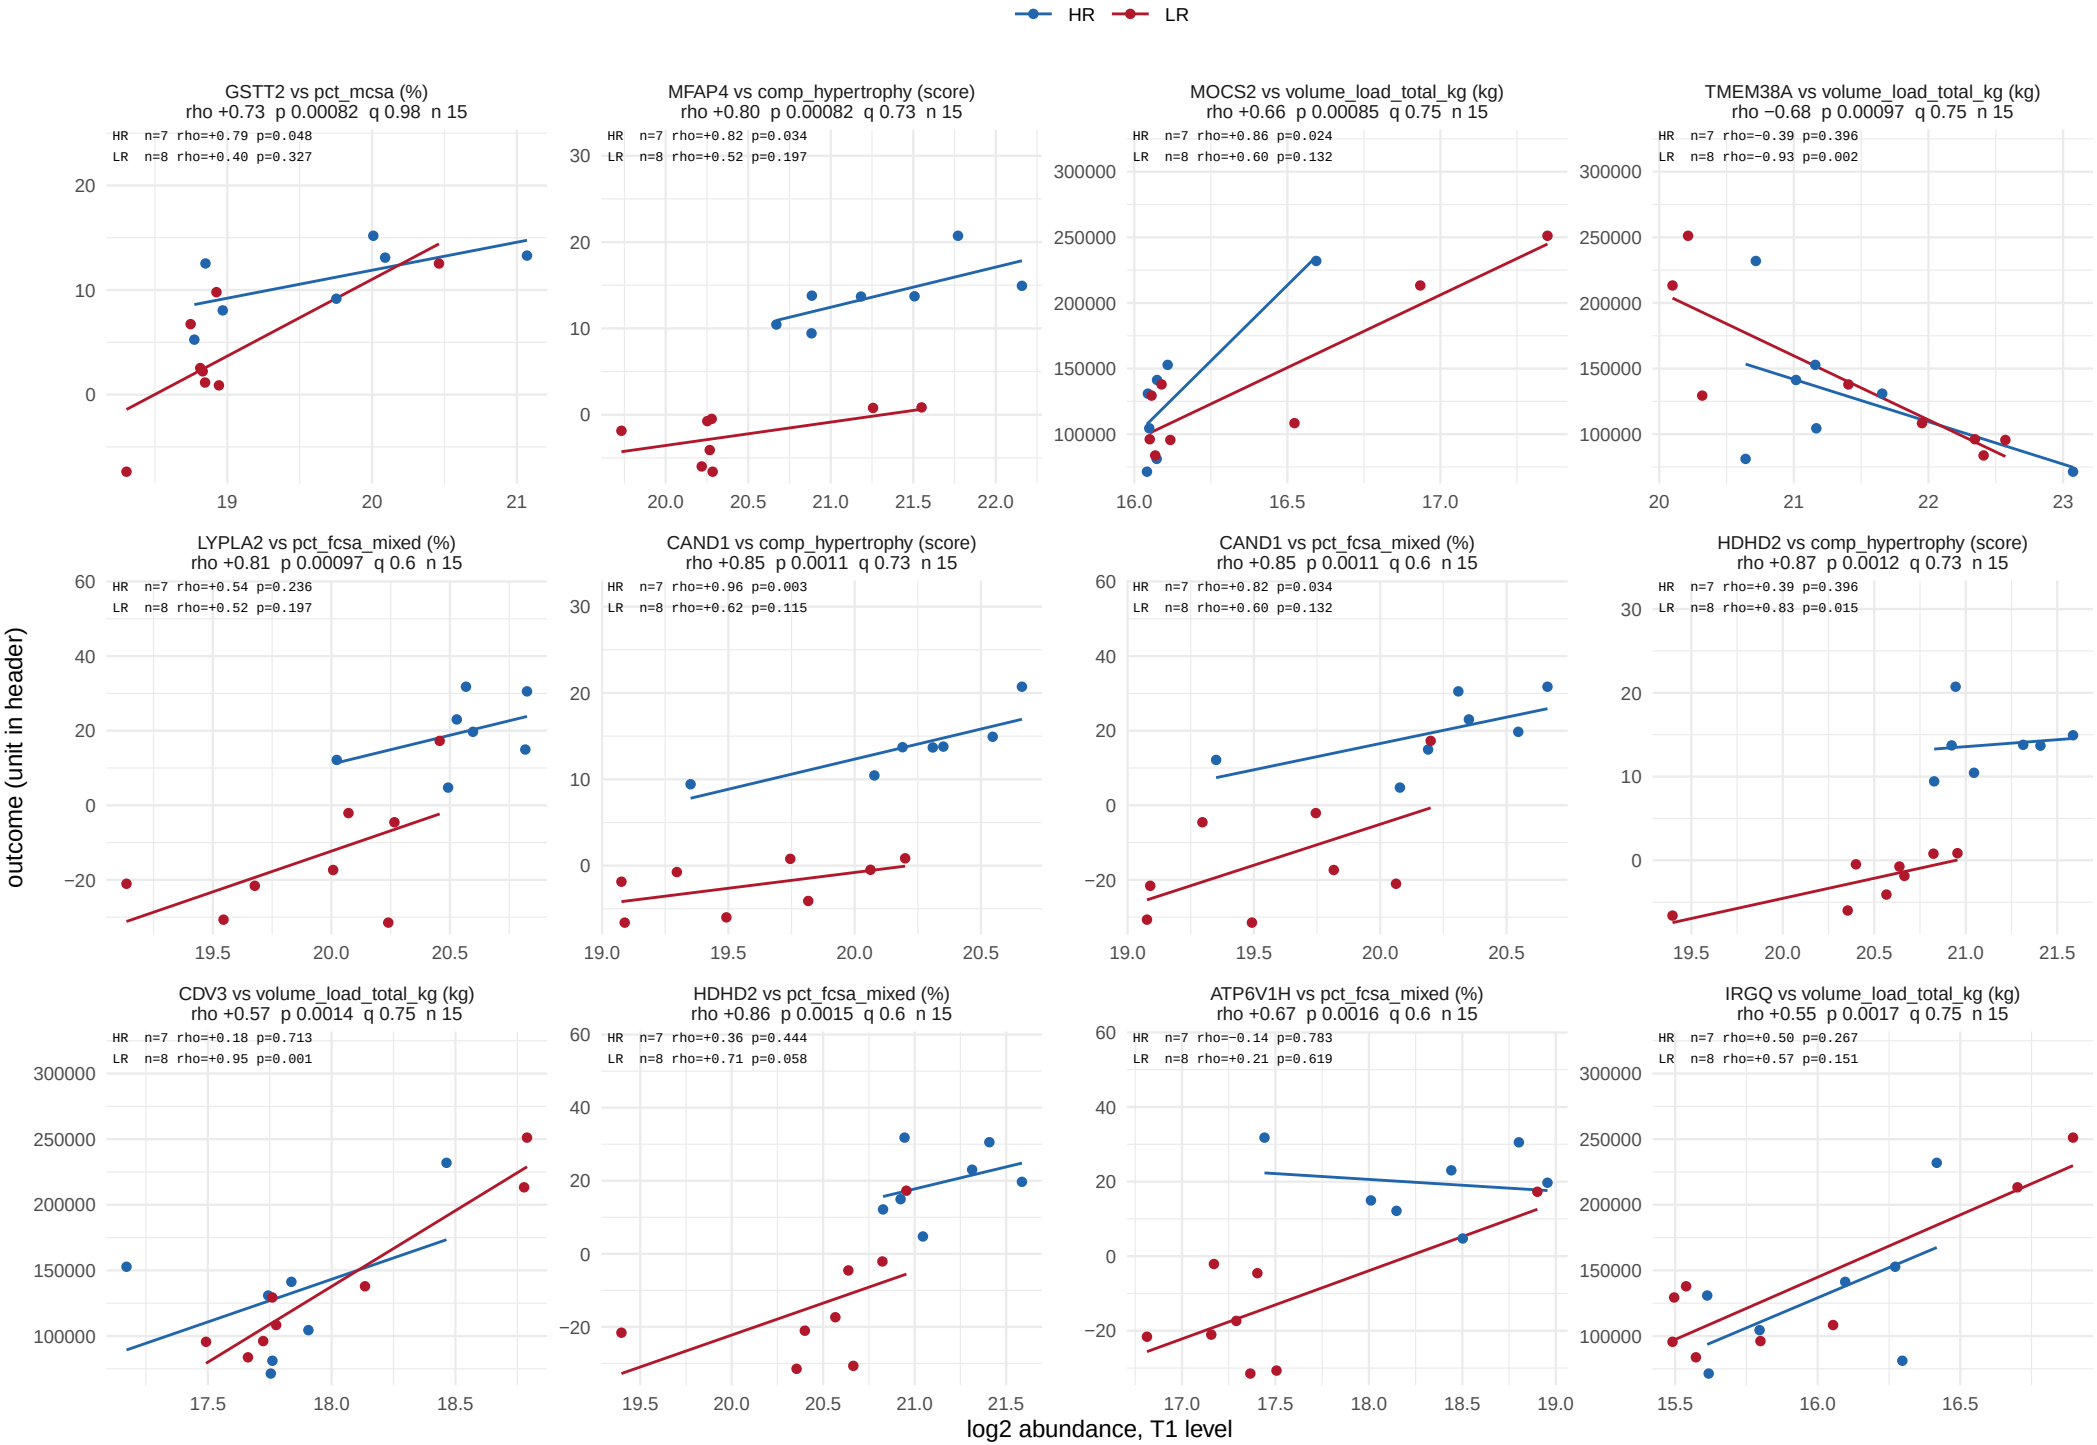

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


695 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 3 of 58.



One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


695 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 4 of 58.

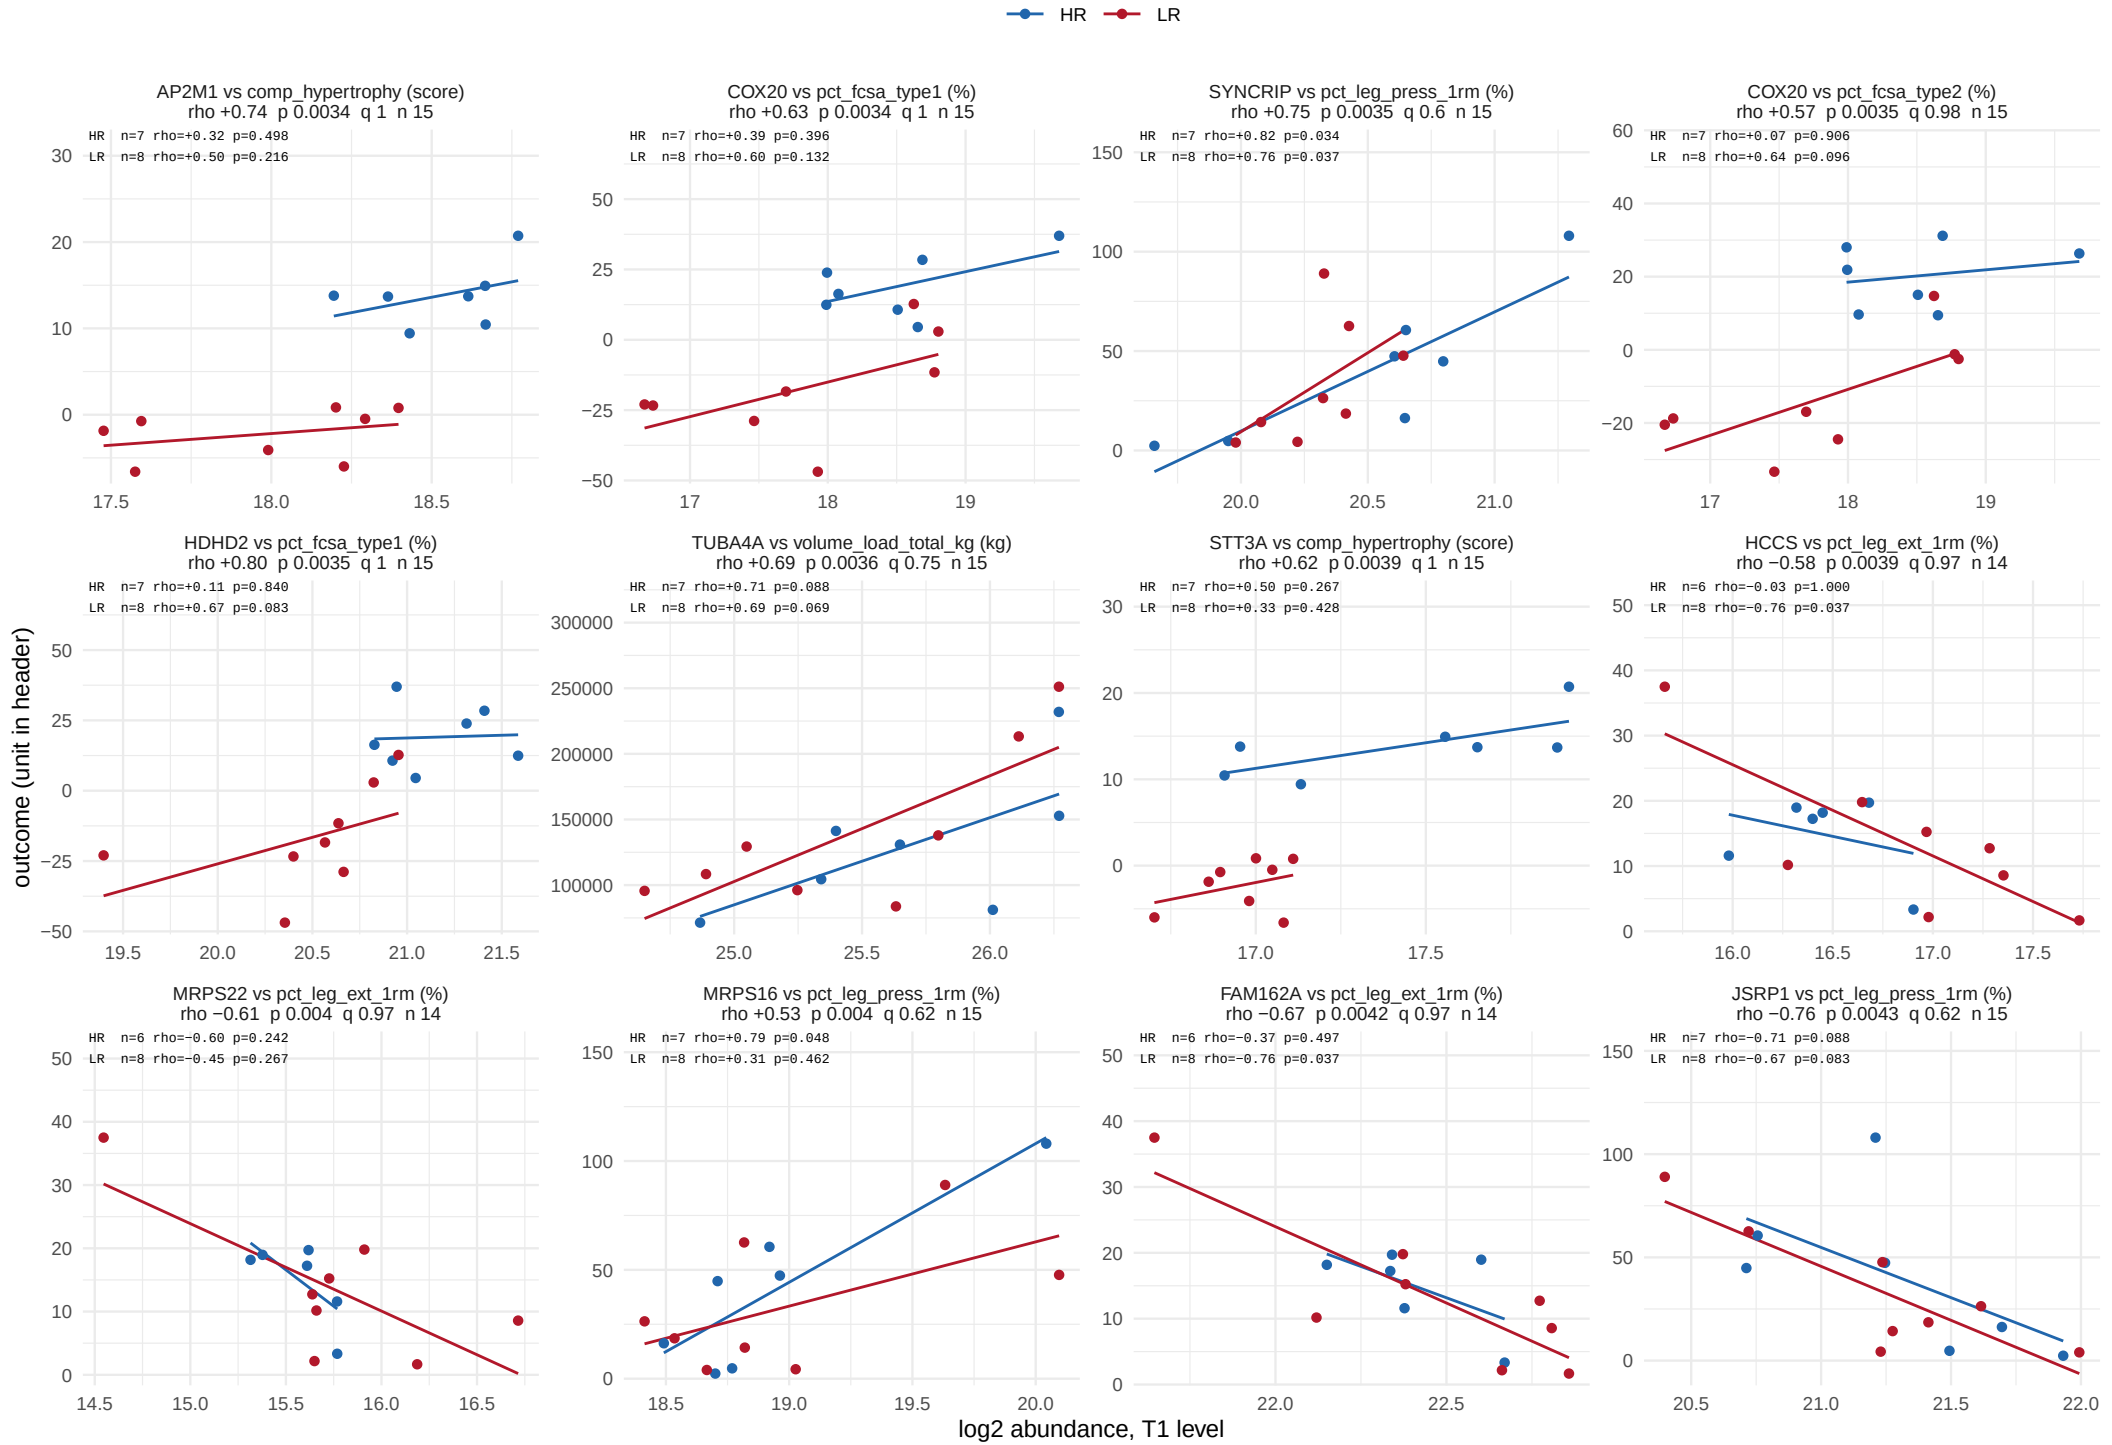

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


695 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 5 of 58.

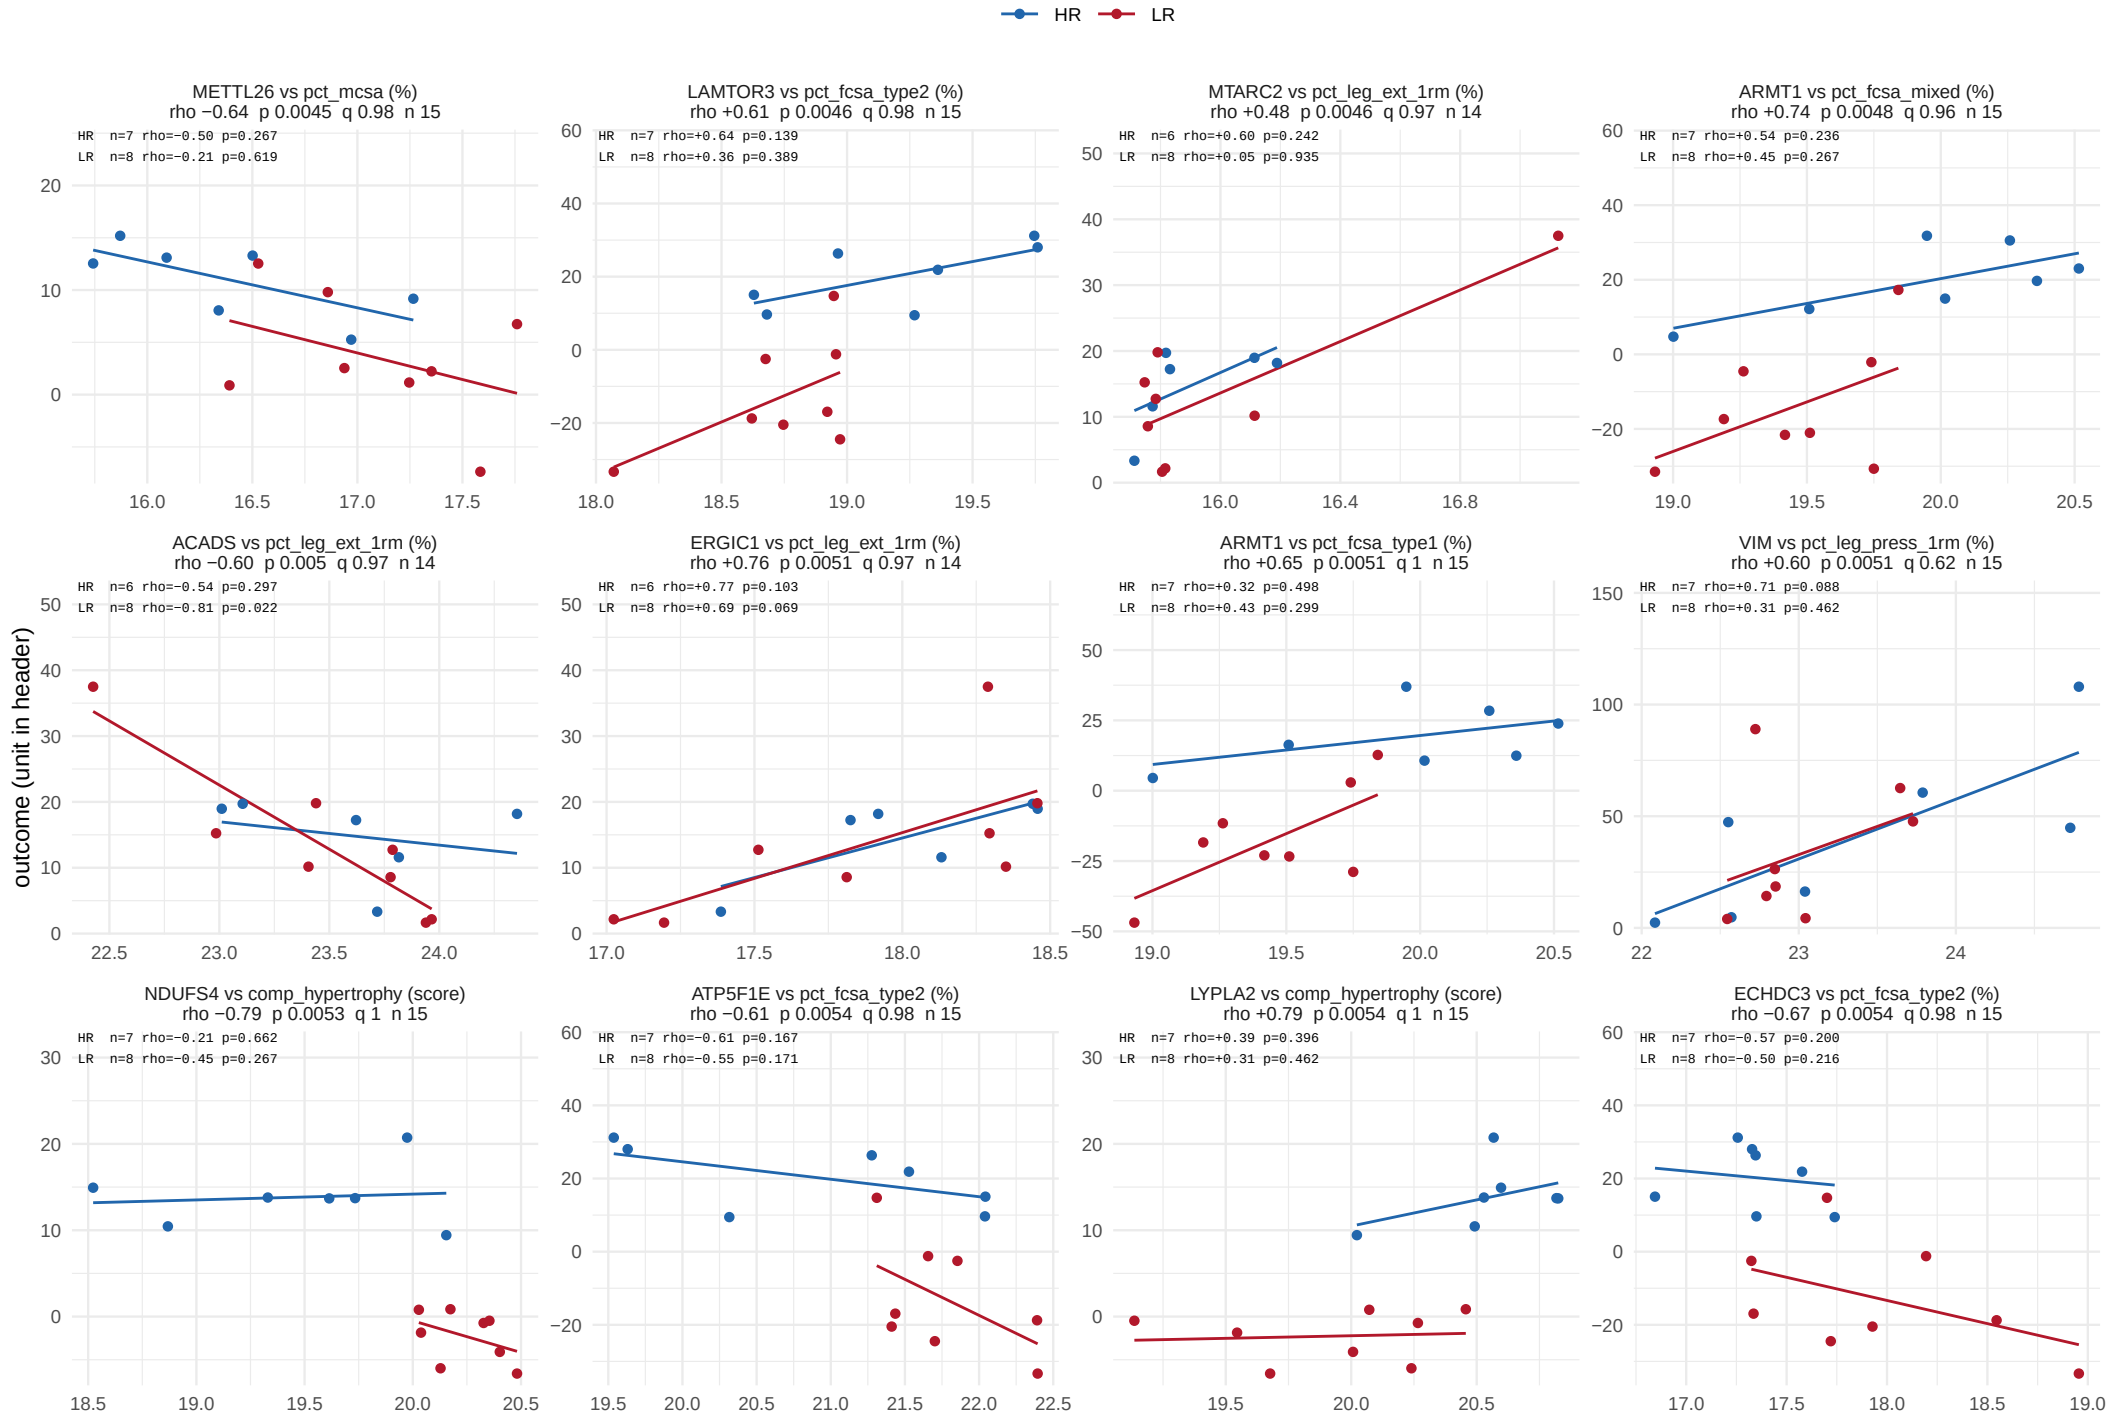

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


695 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 6 of 58.

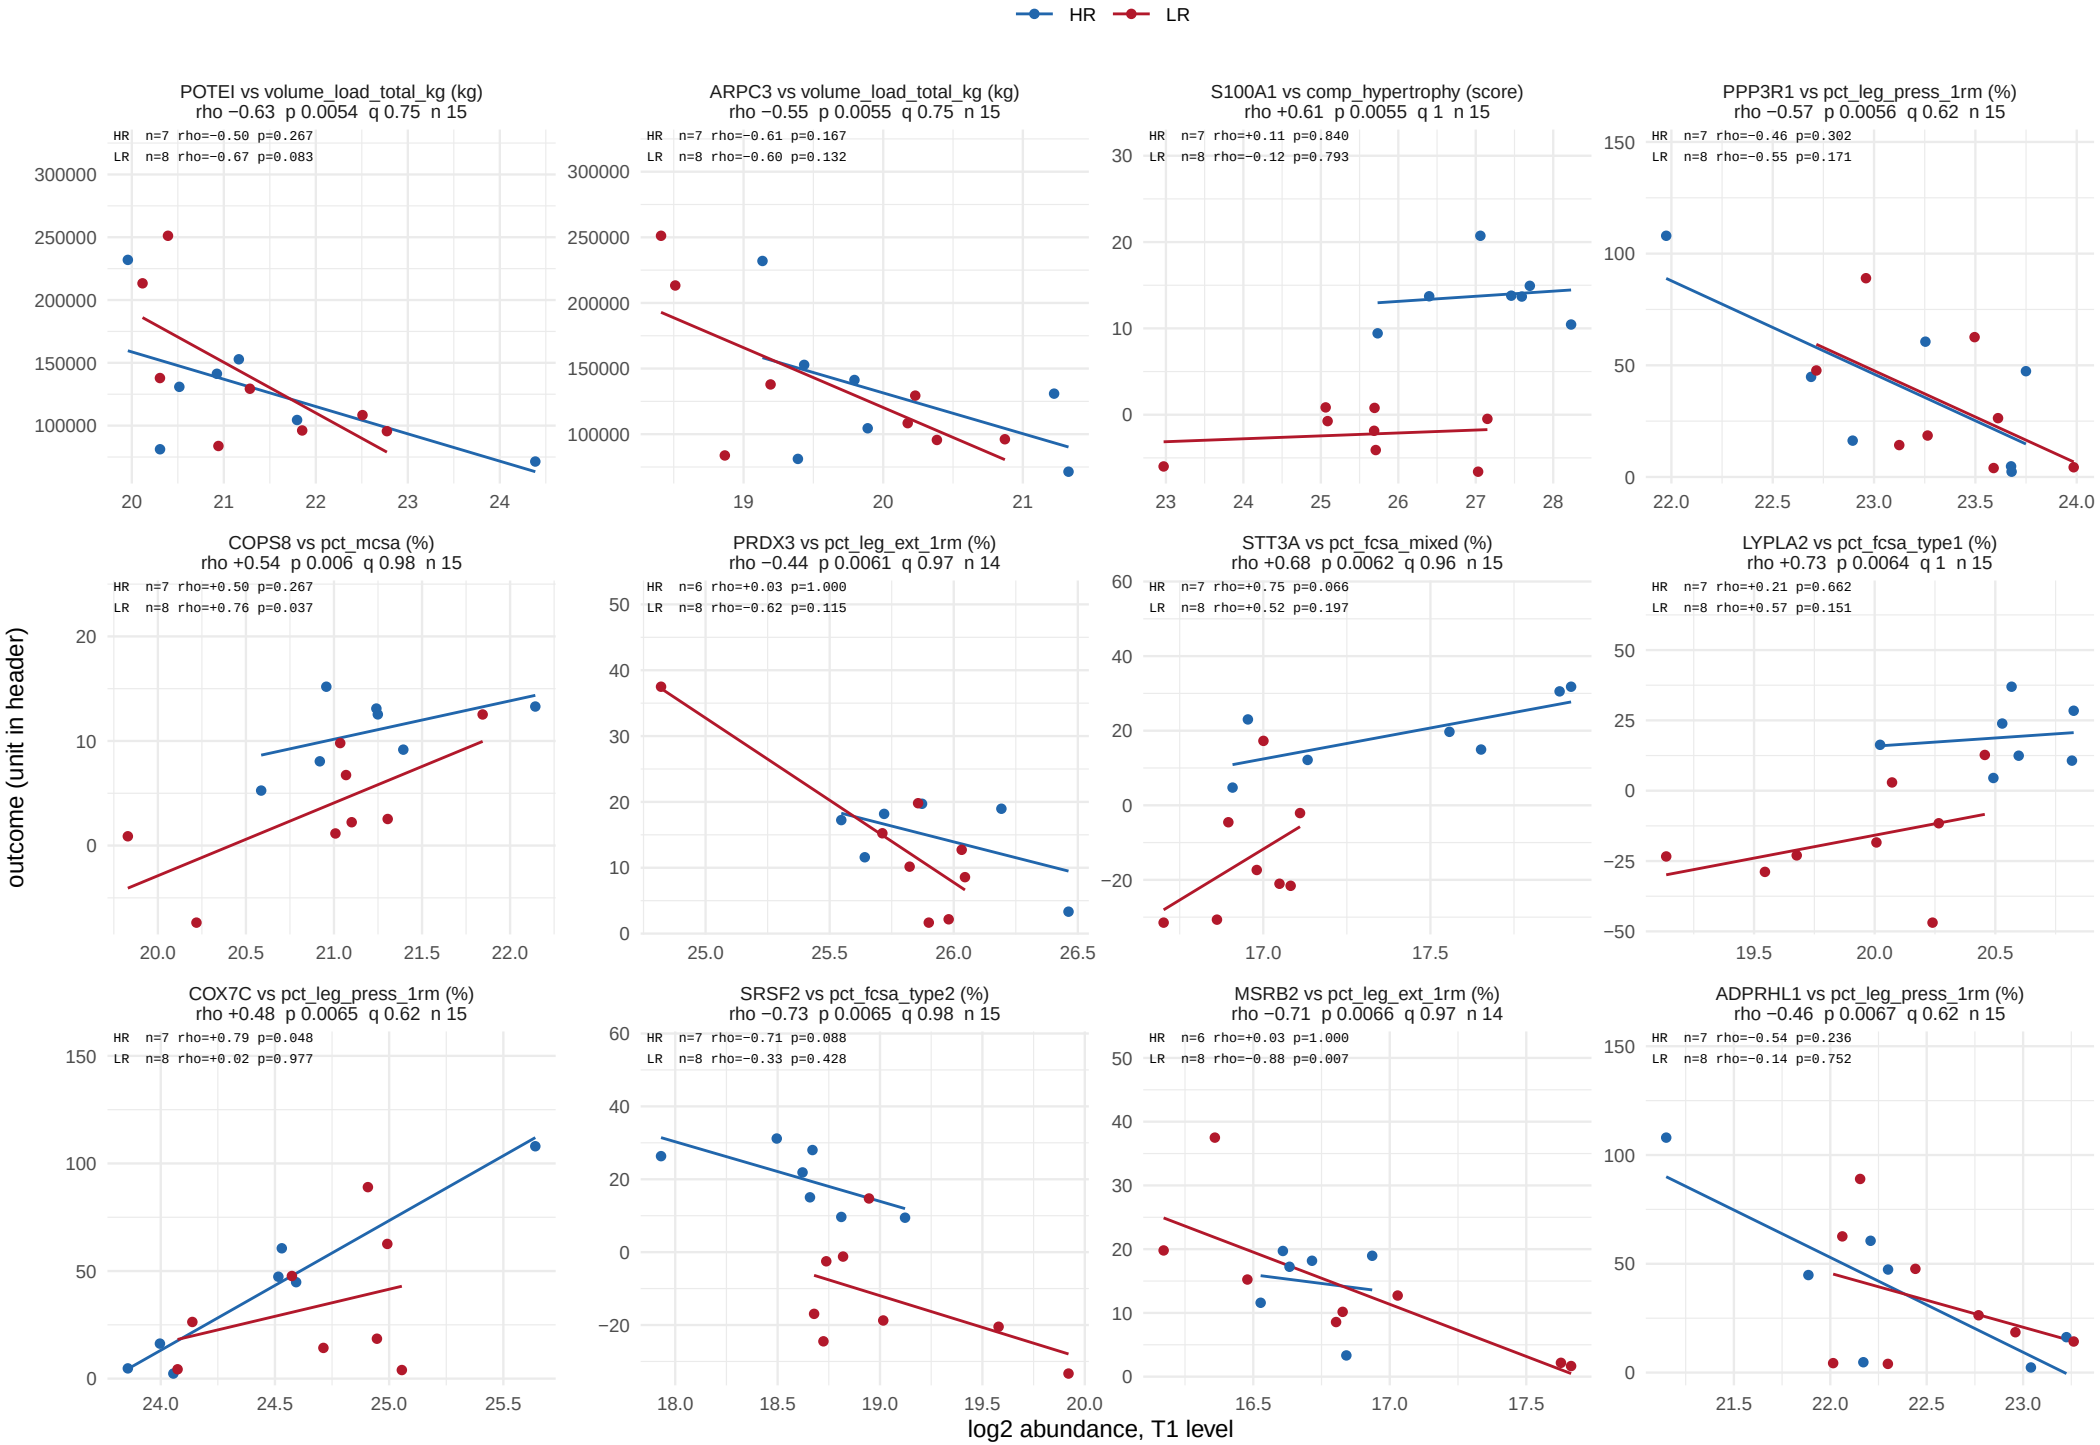

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


695 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 7 of 58.

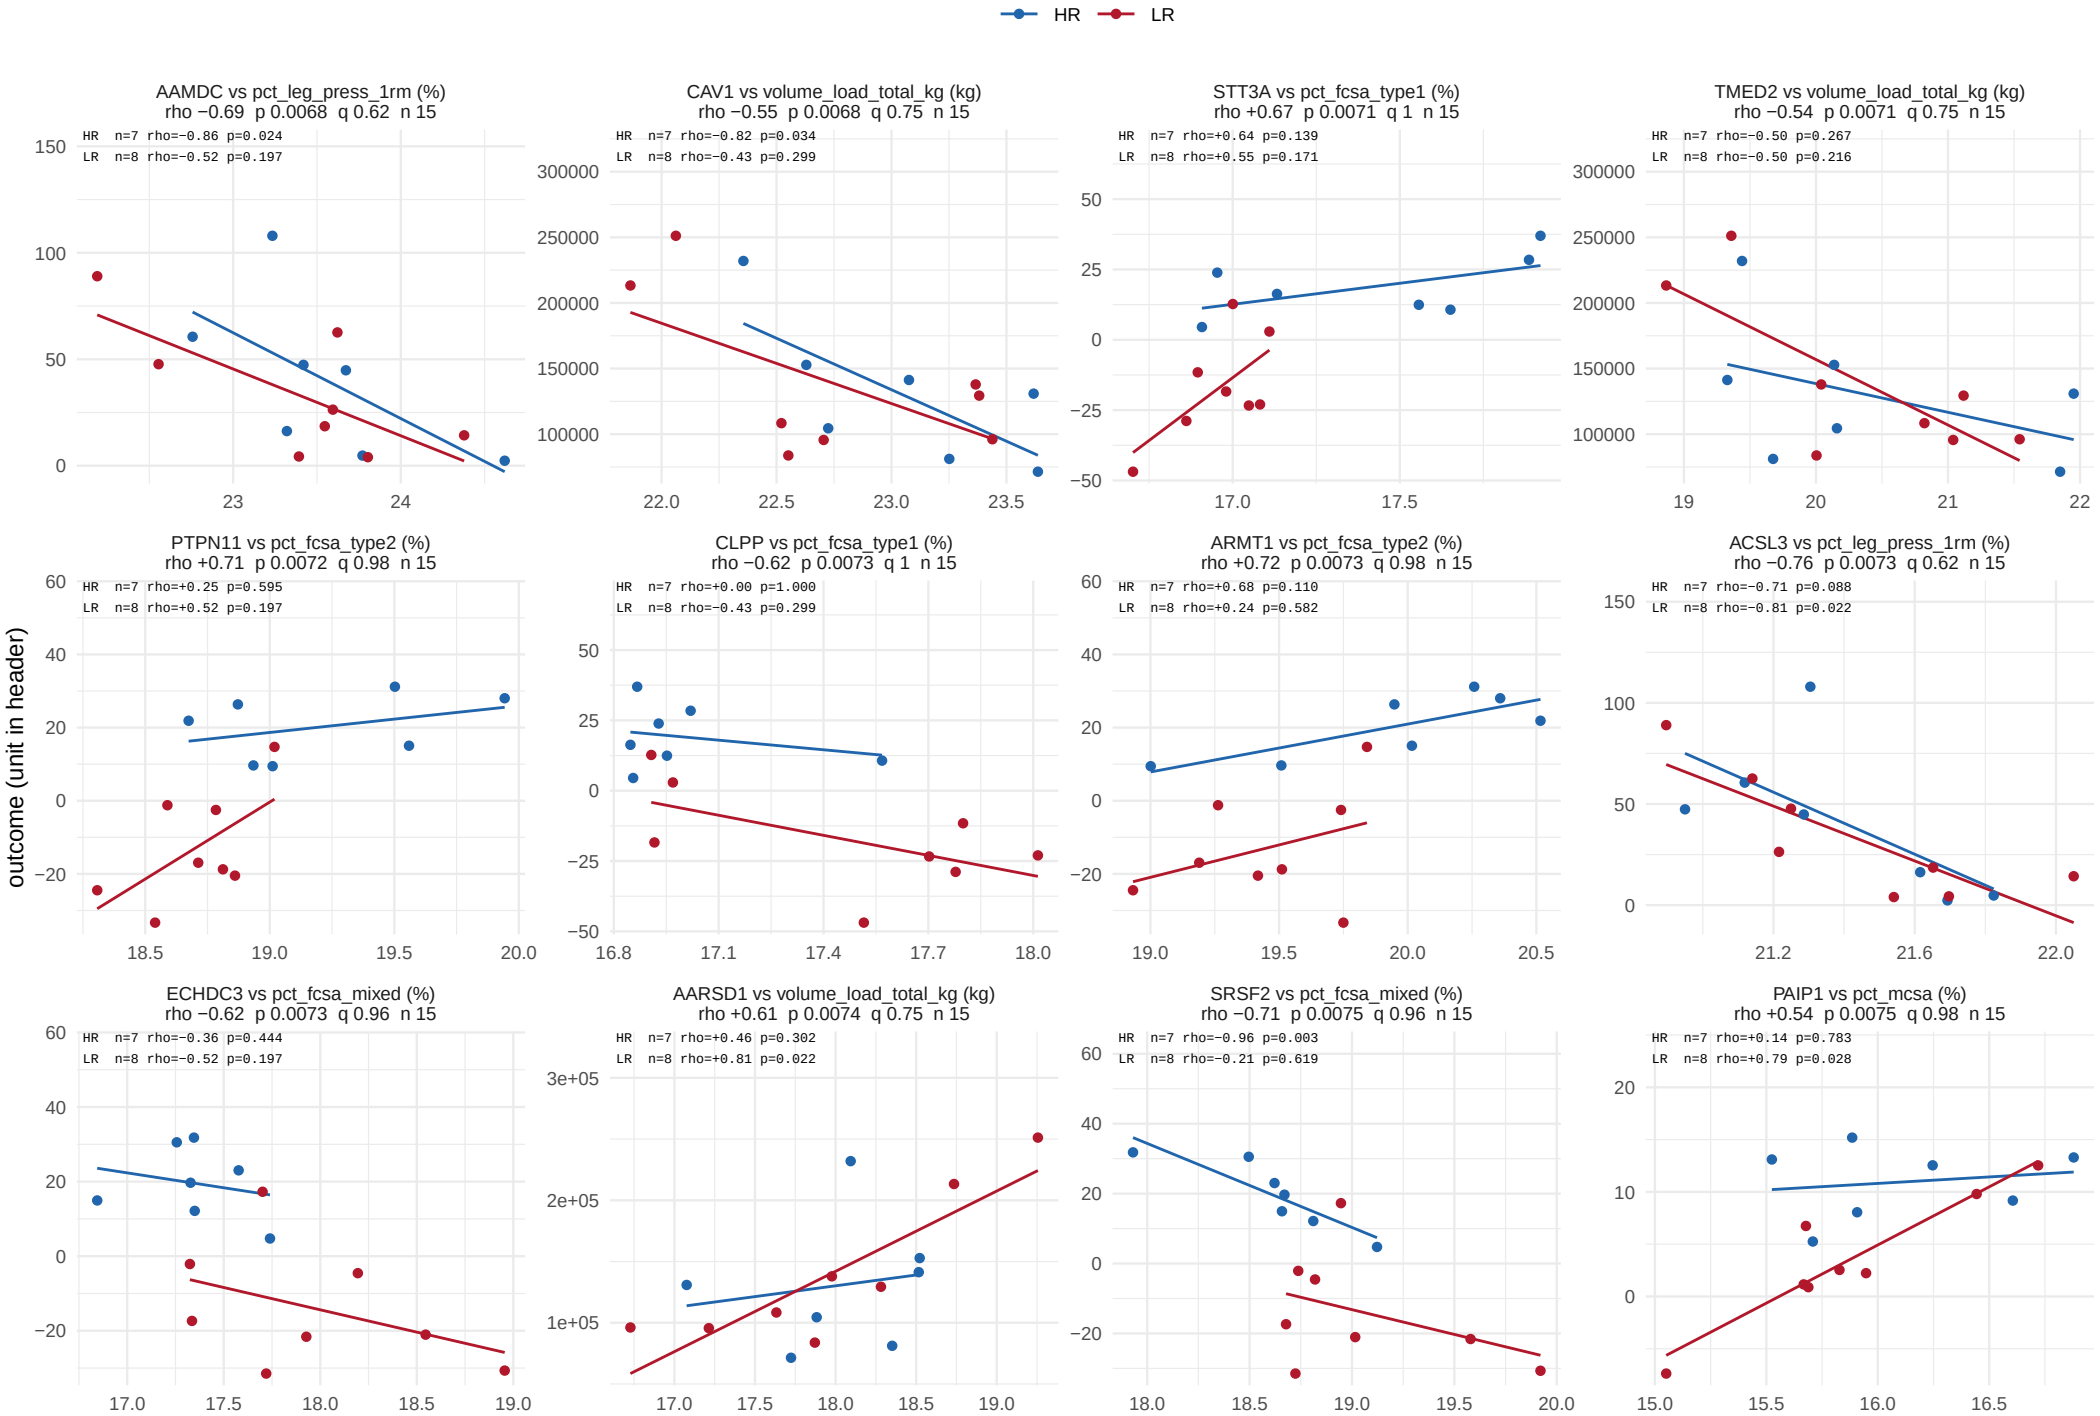

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


695 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 8 of 58.

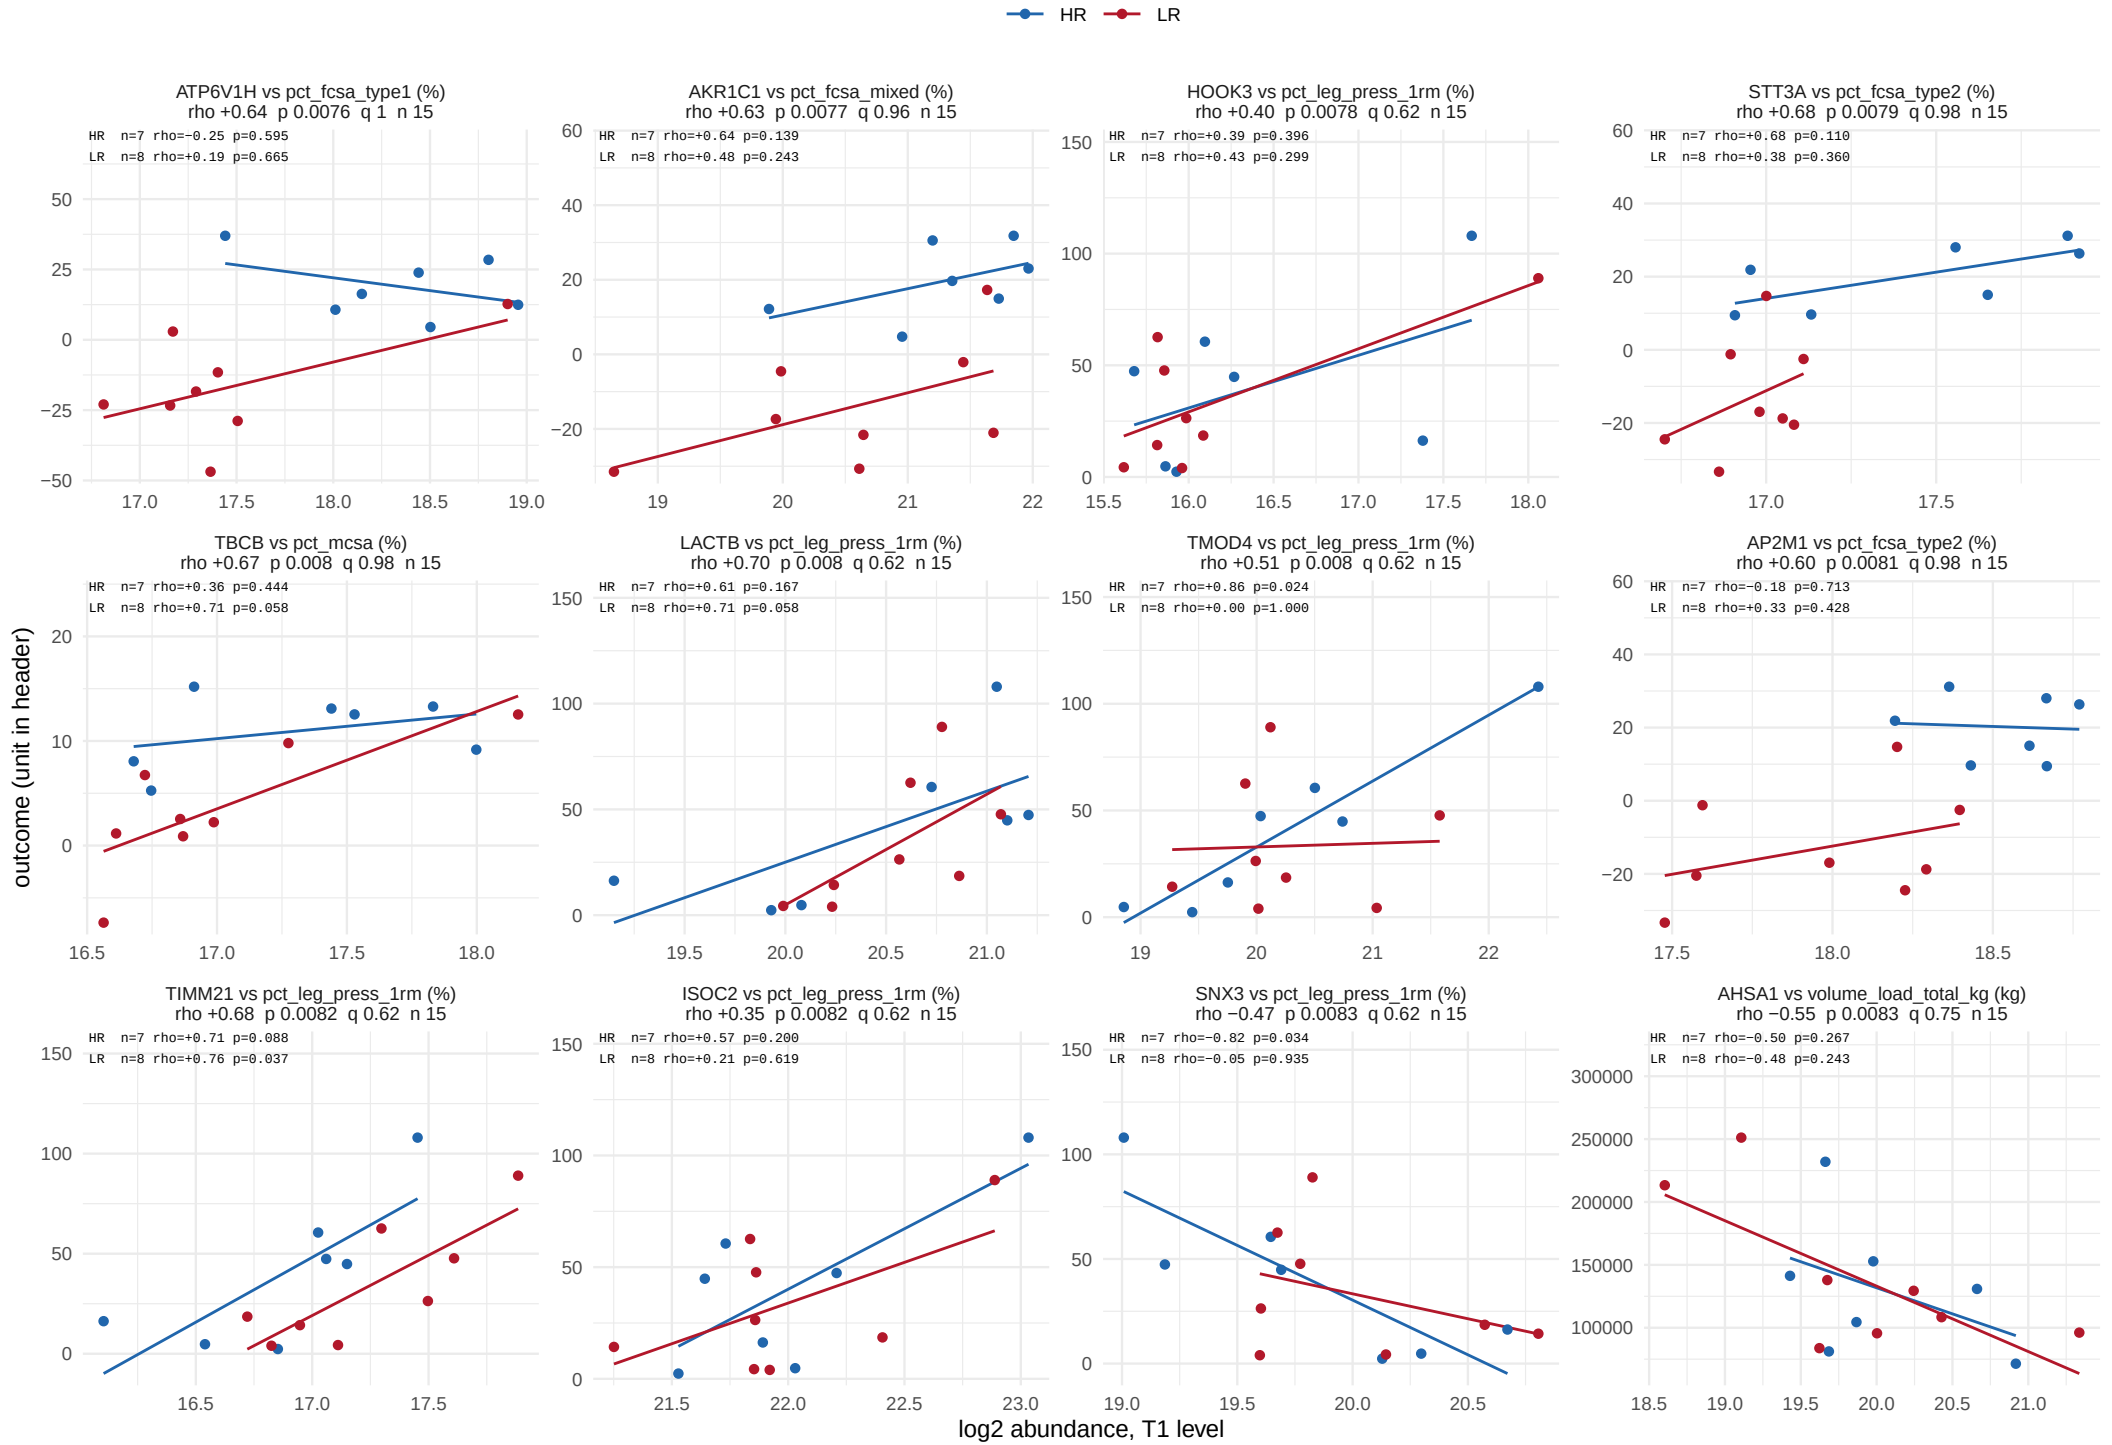

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


695 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 9 of 58.

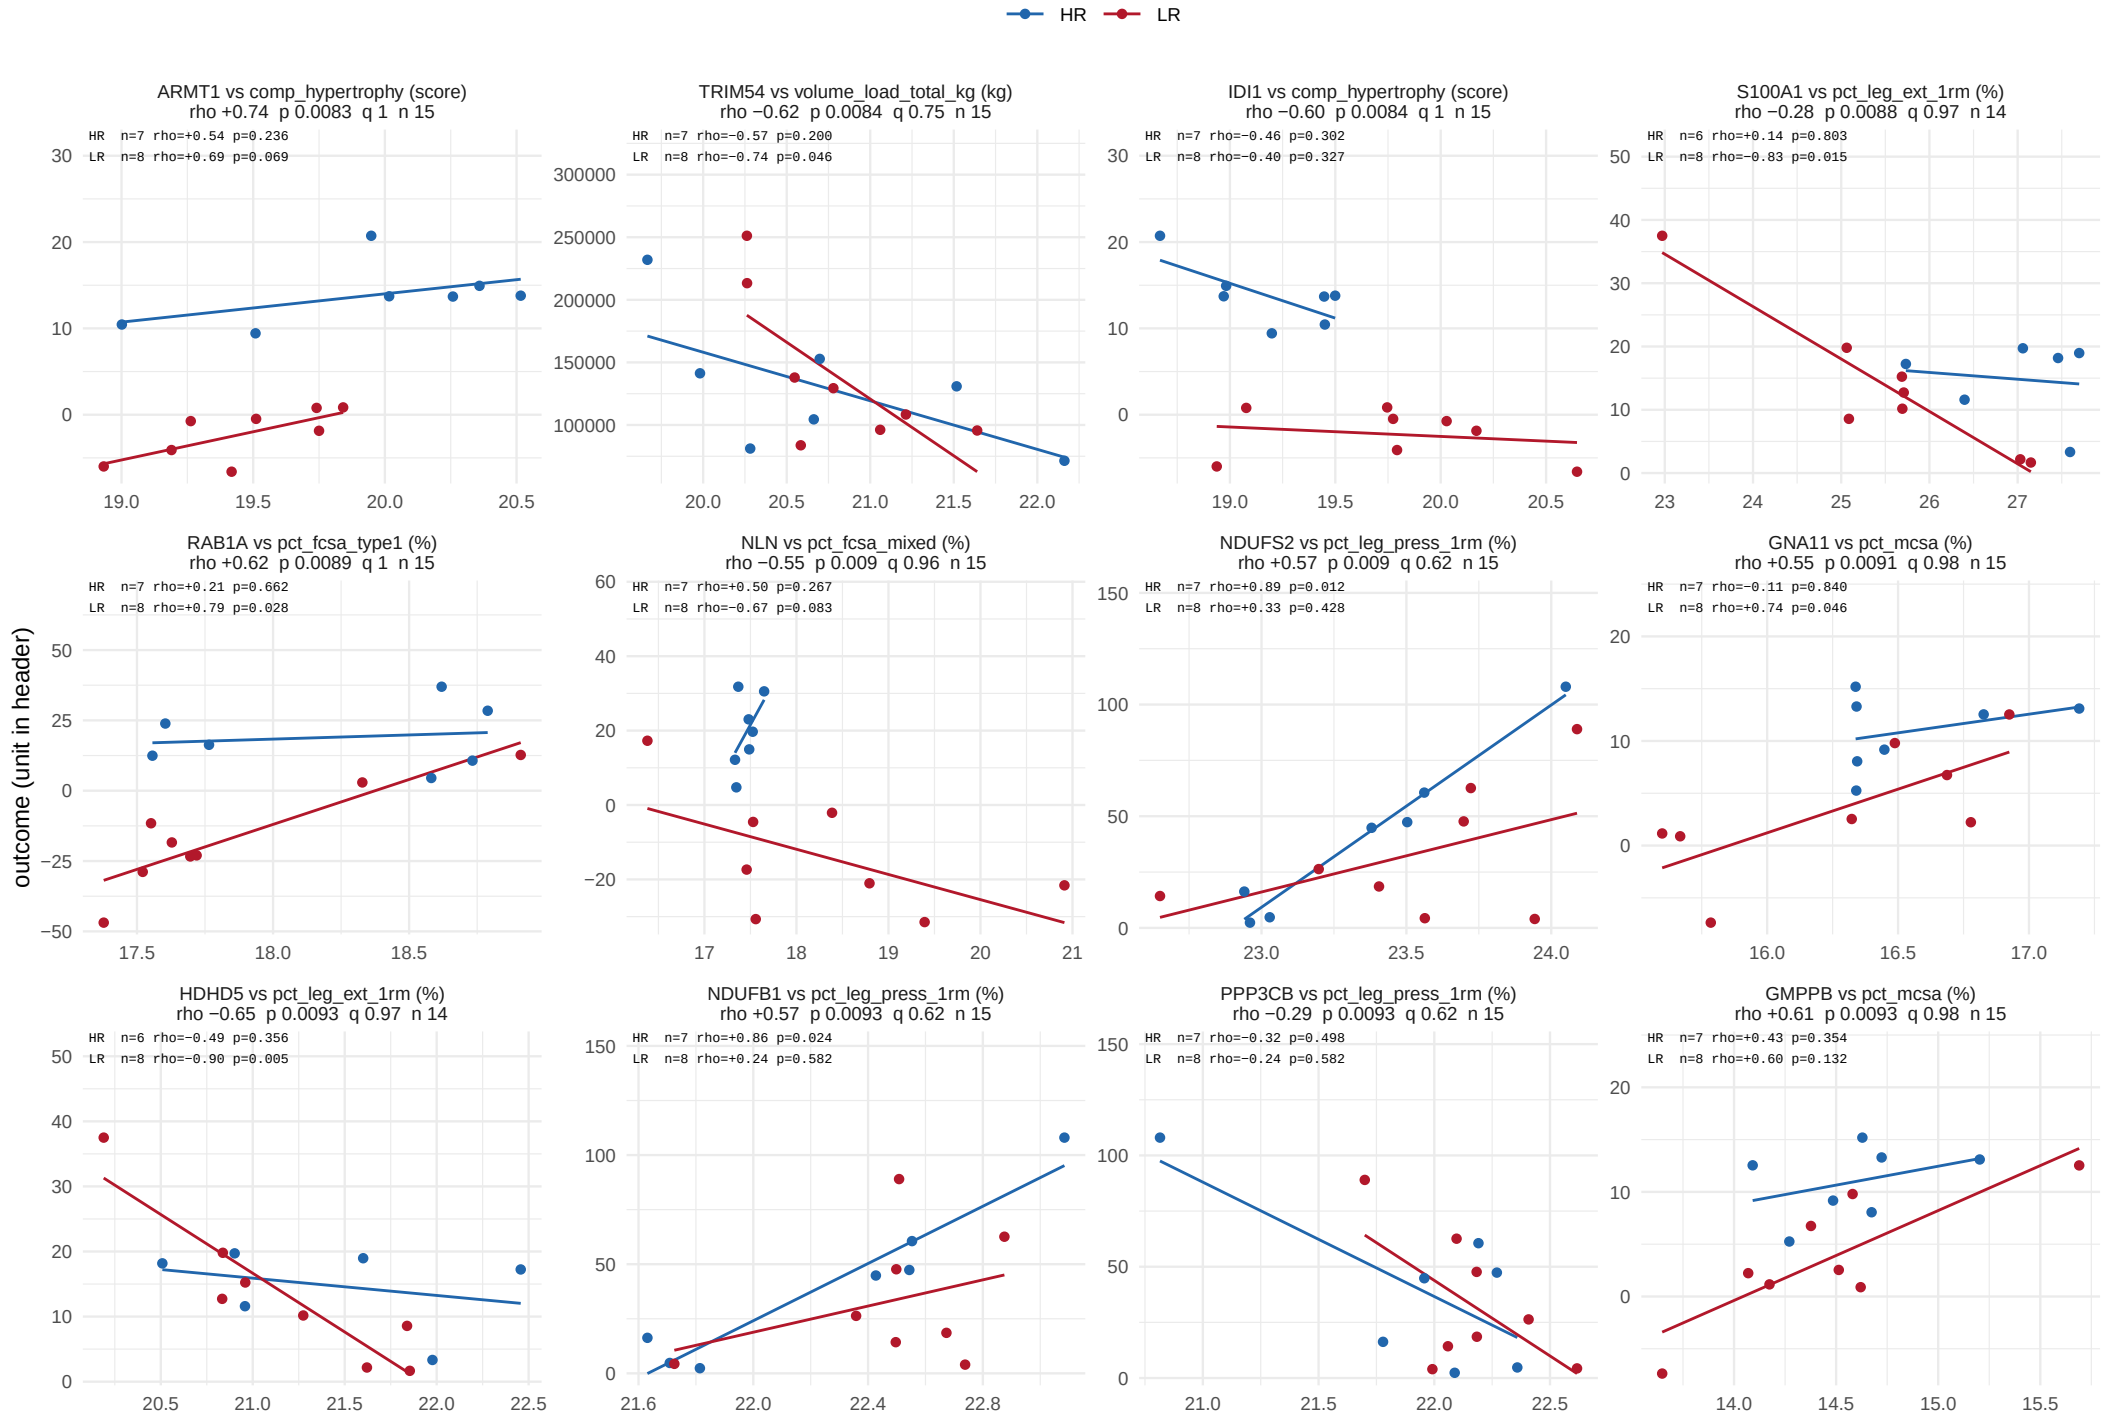

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


695 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 10 of 58.

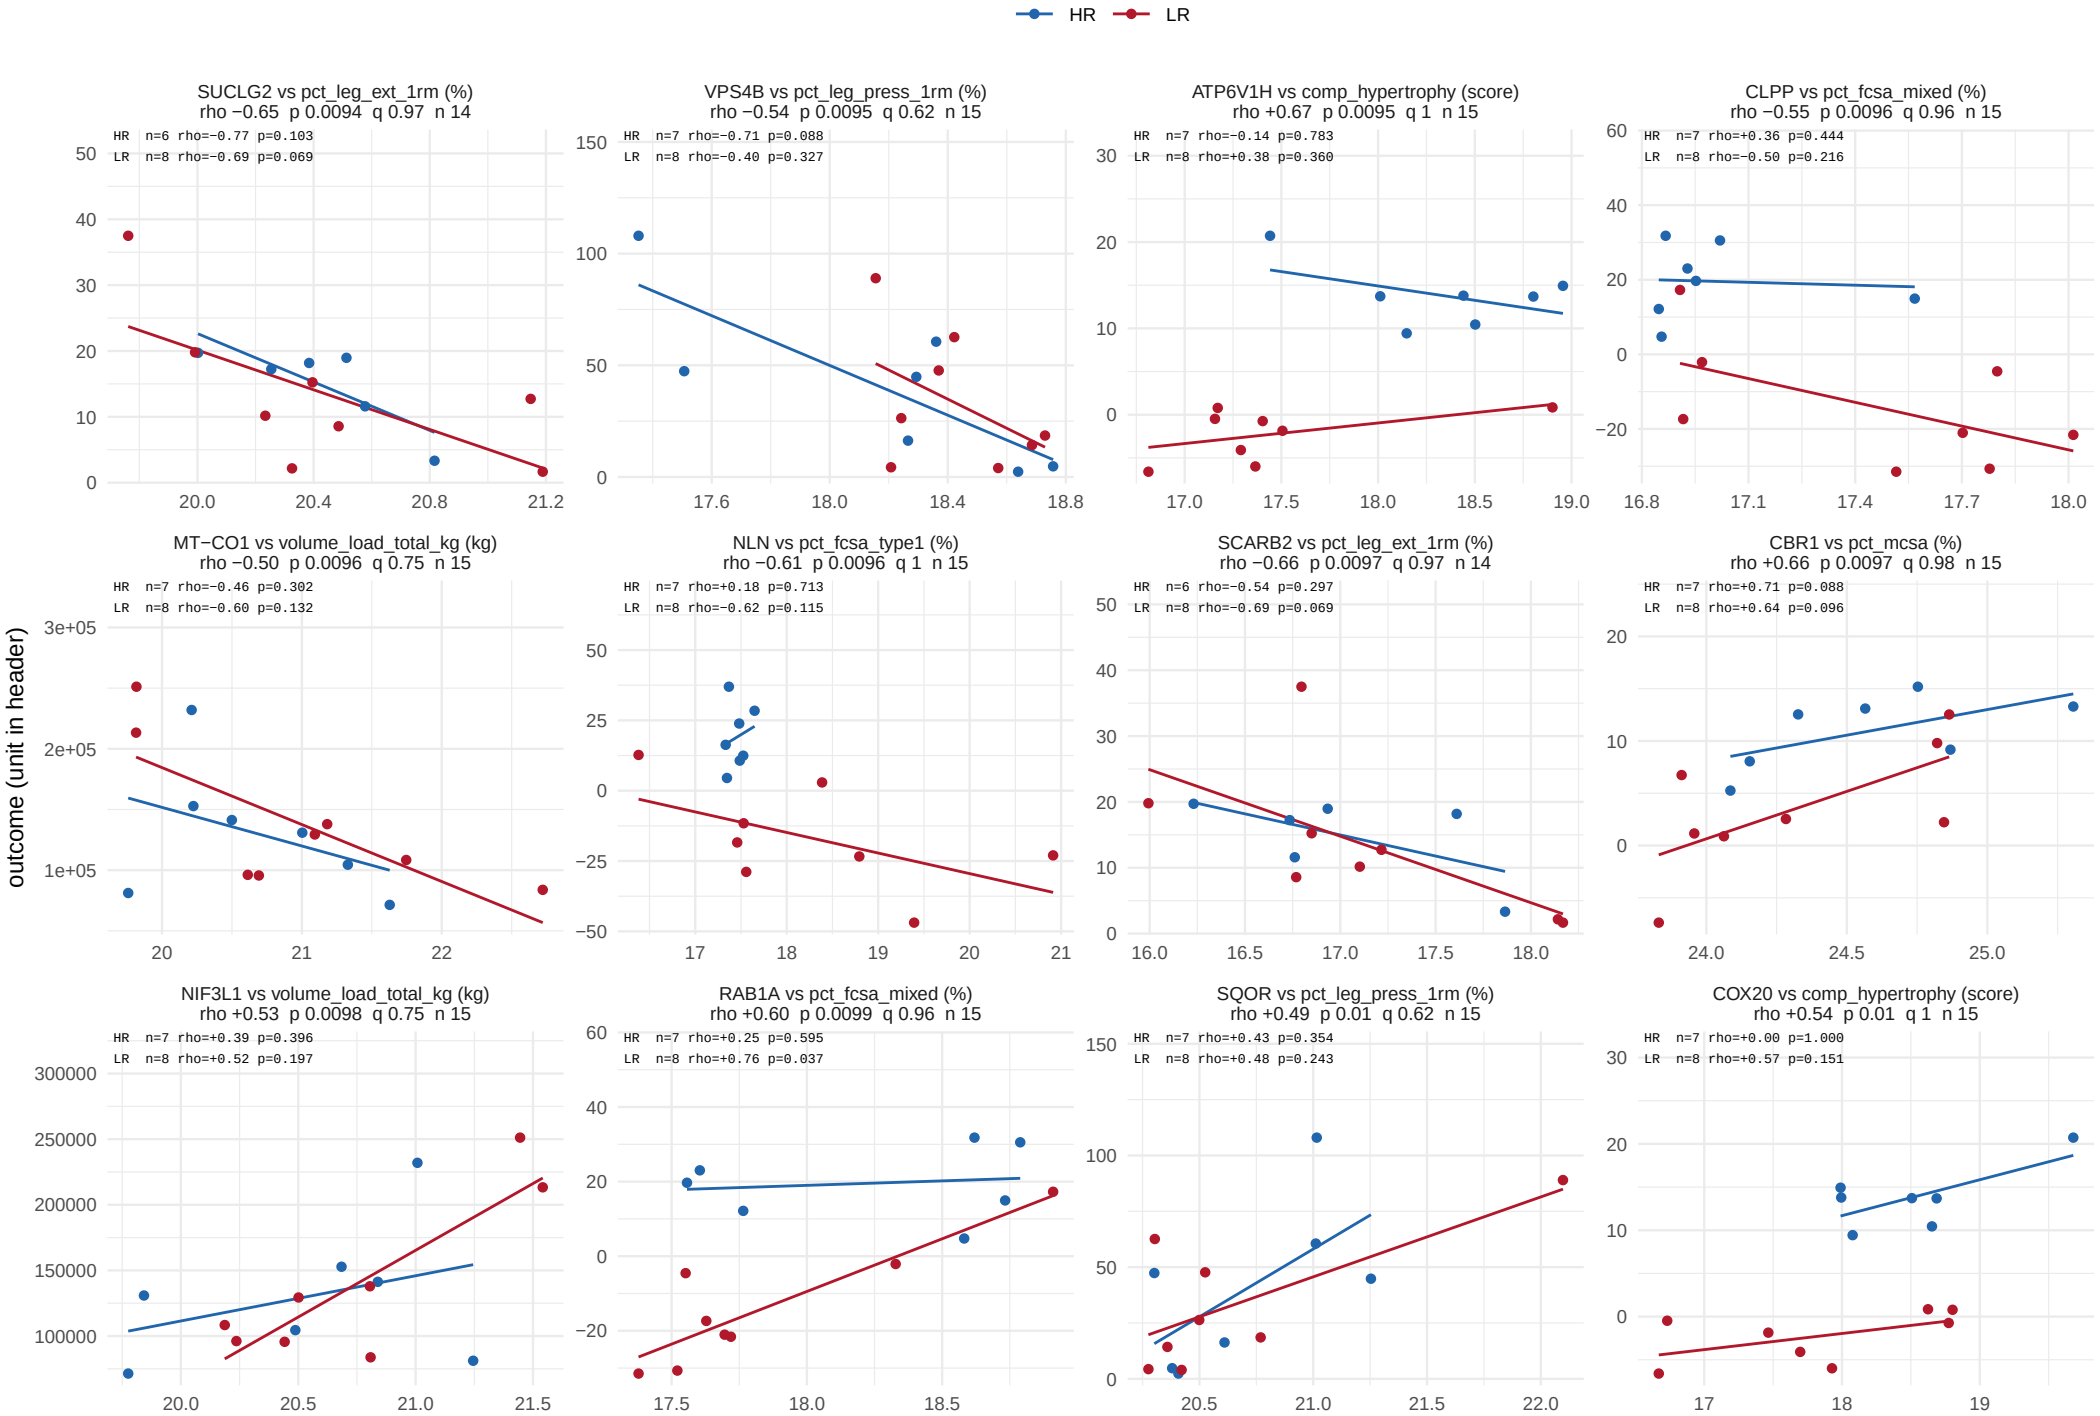

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


695 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 11 of 58.

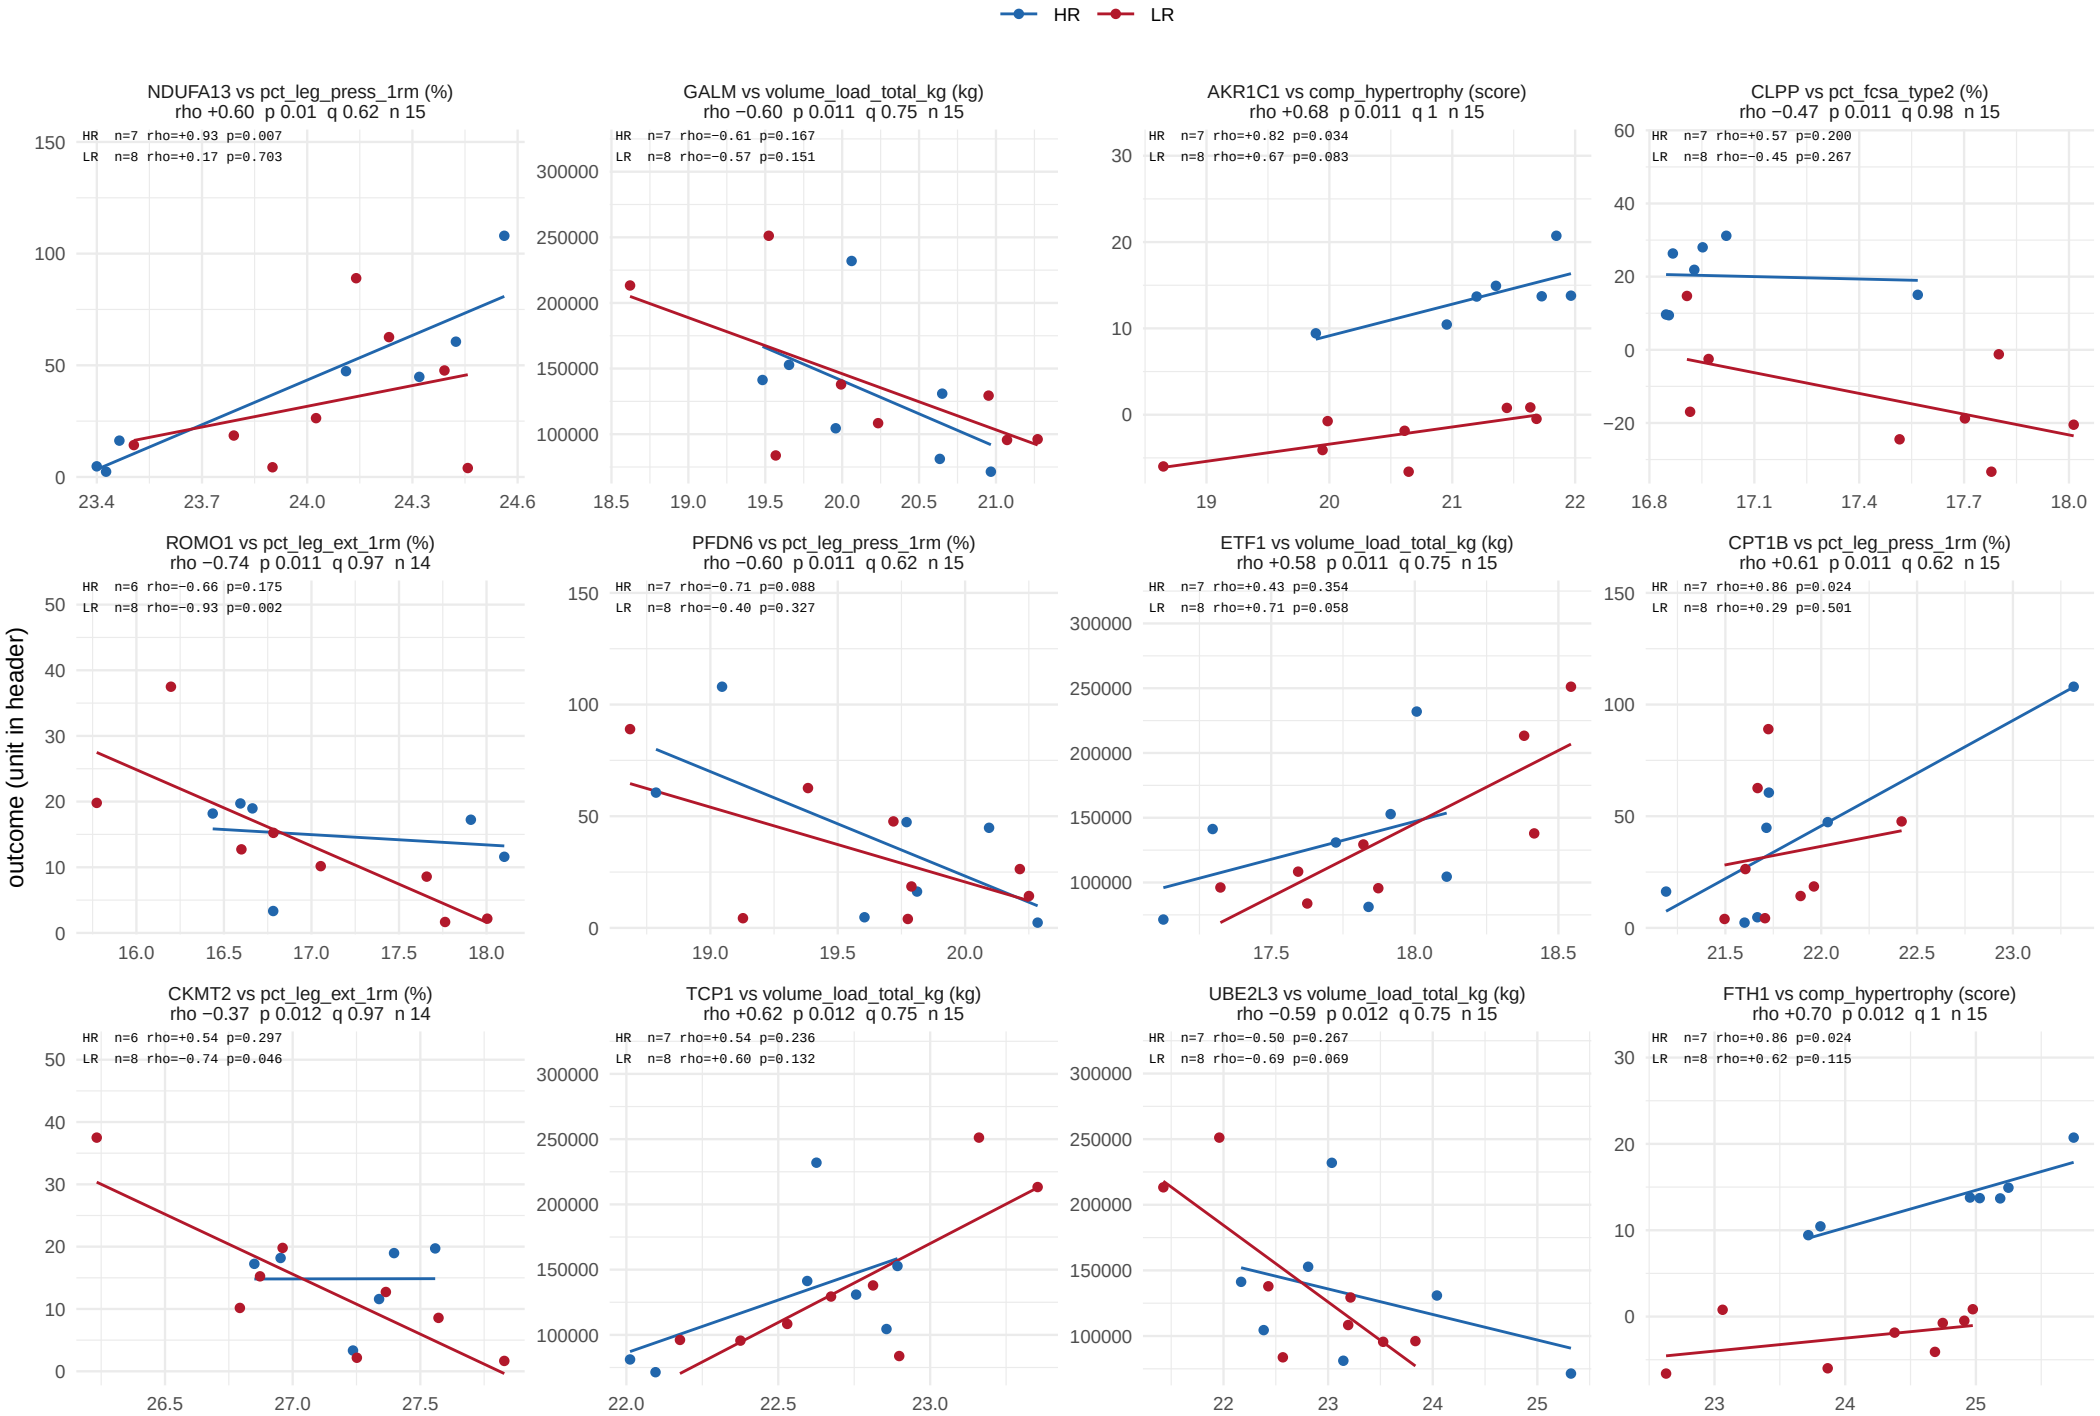

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


695 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 12 of 58.

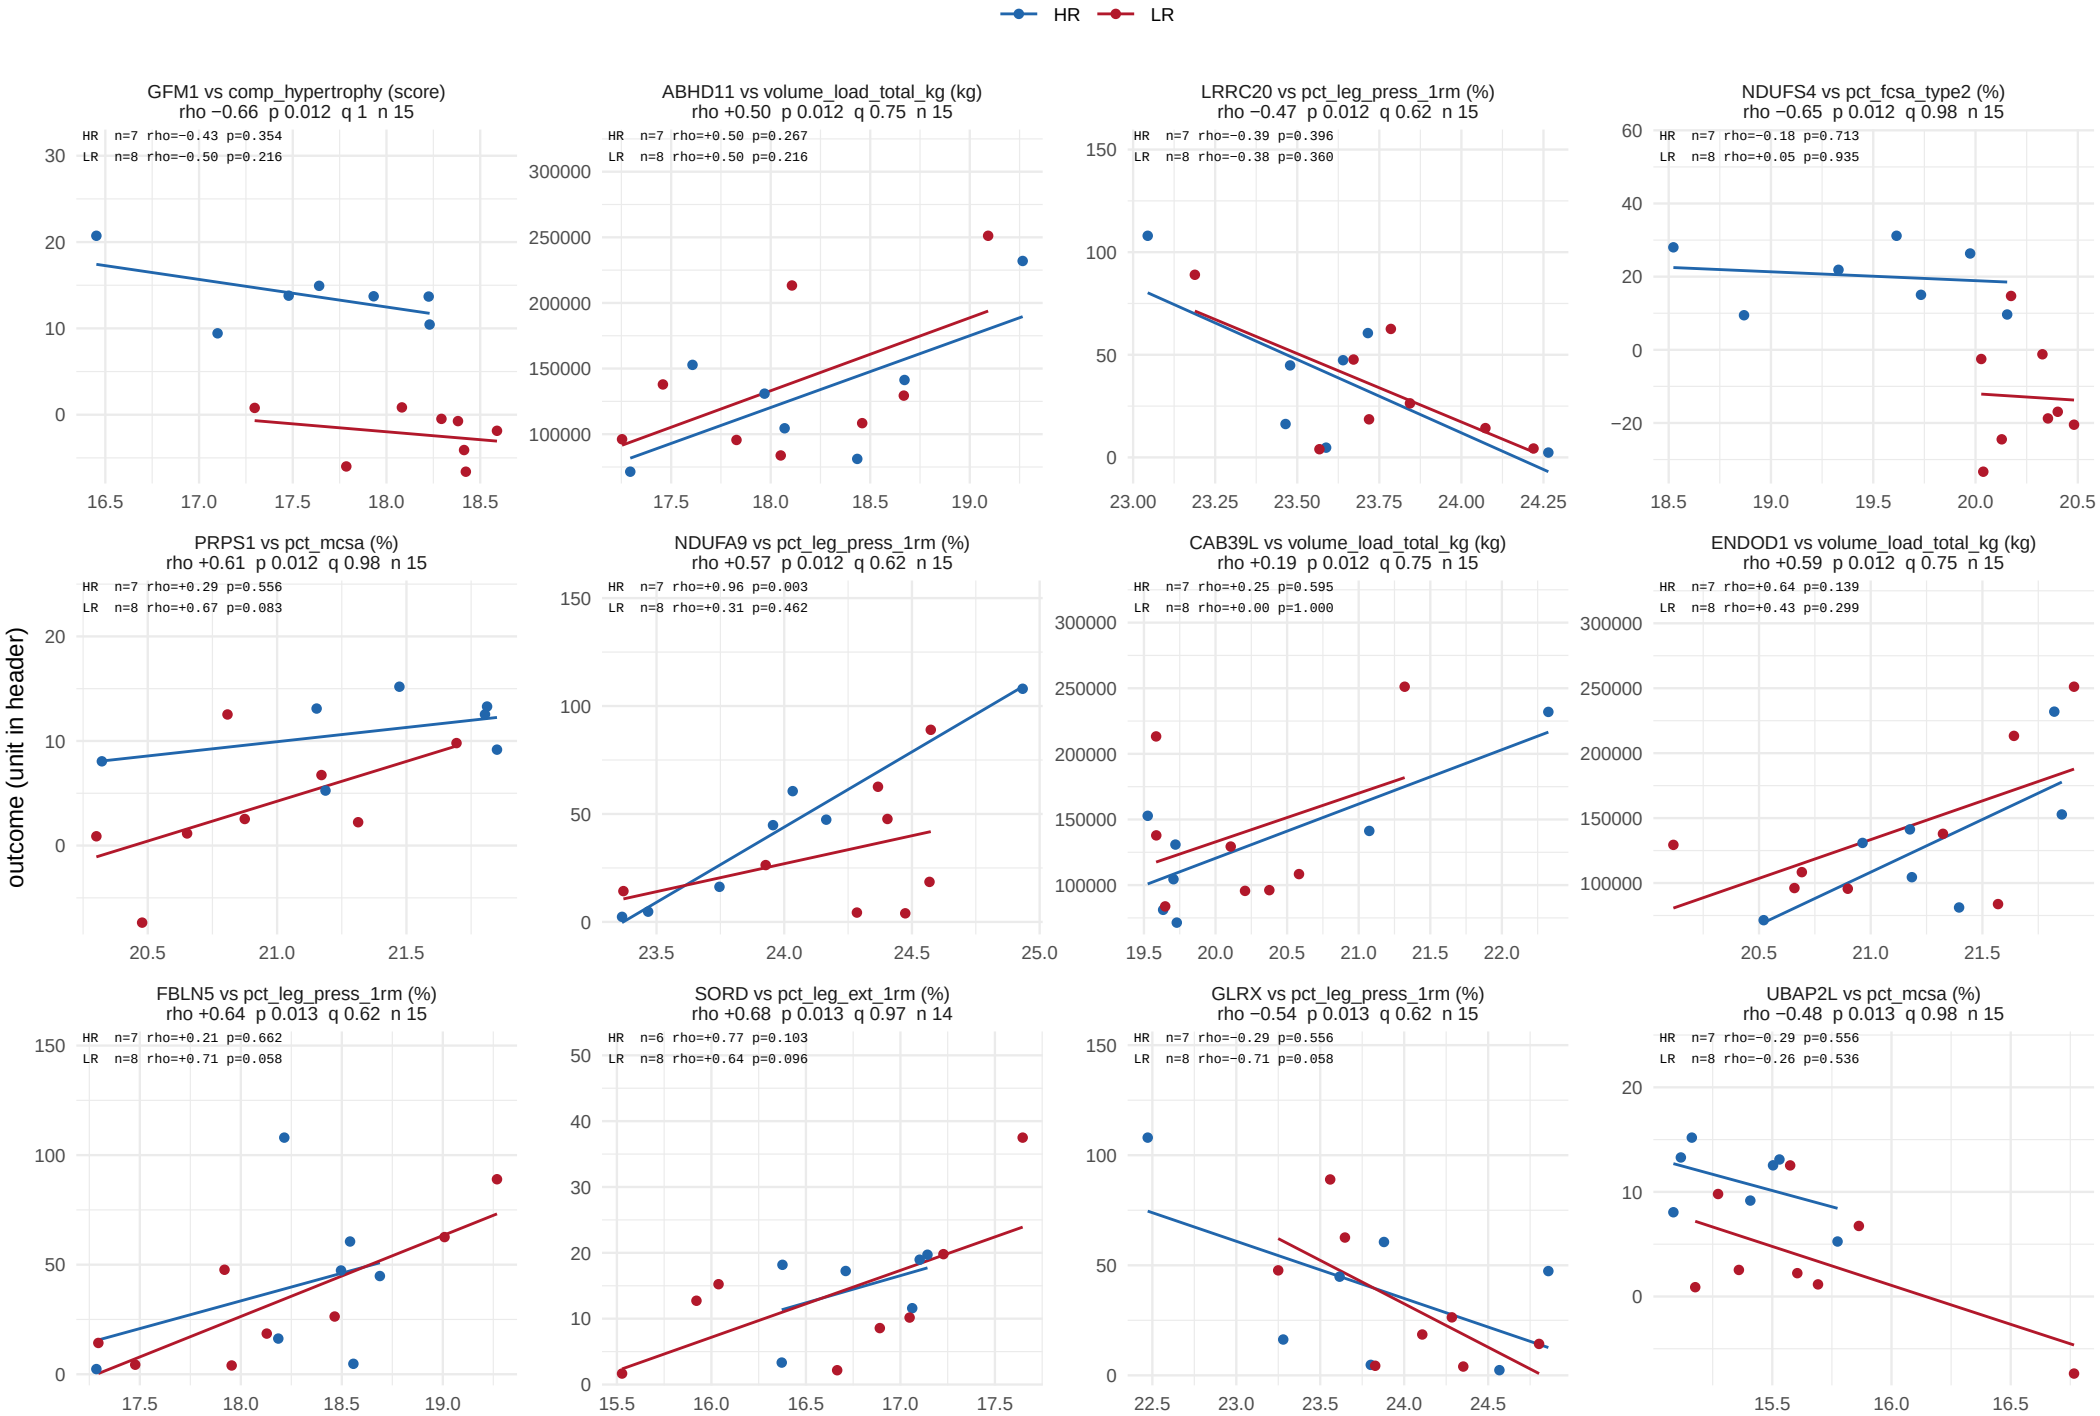

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


695 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 13 of 58.

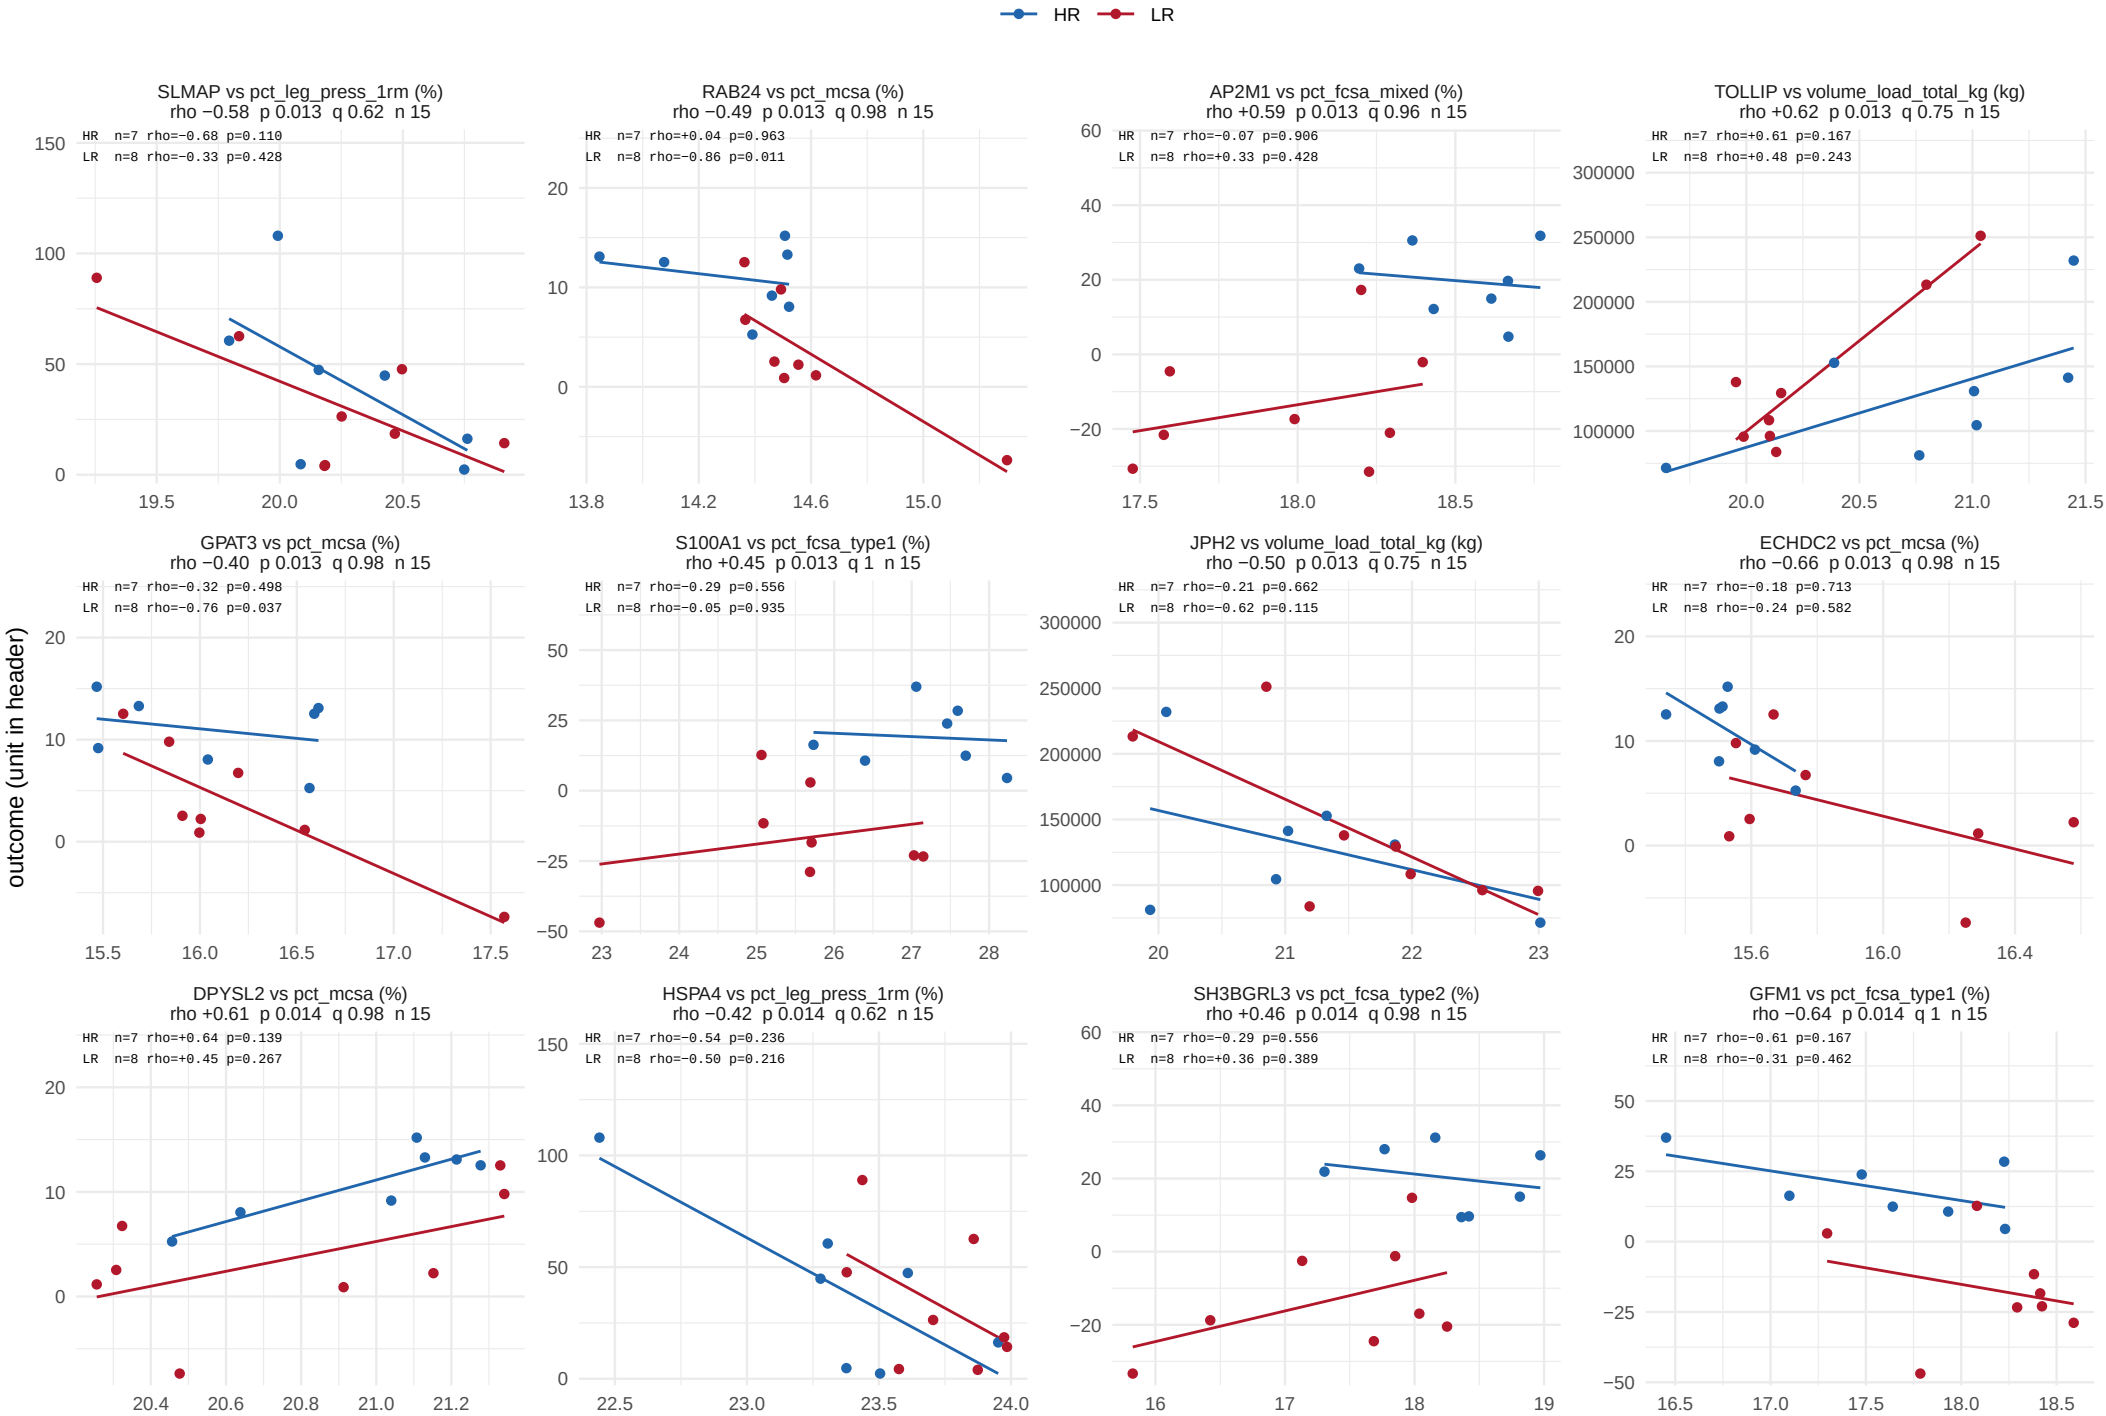

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


695 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 14 of 58.

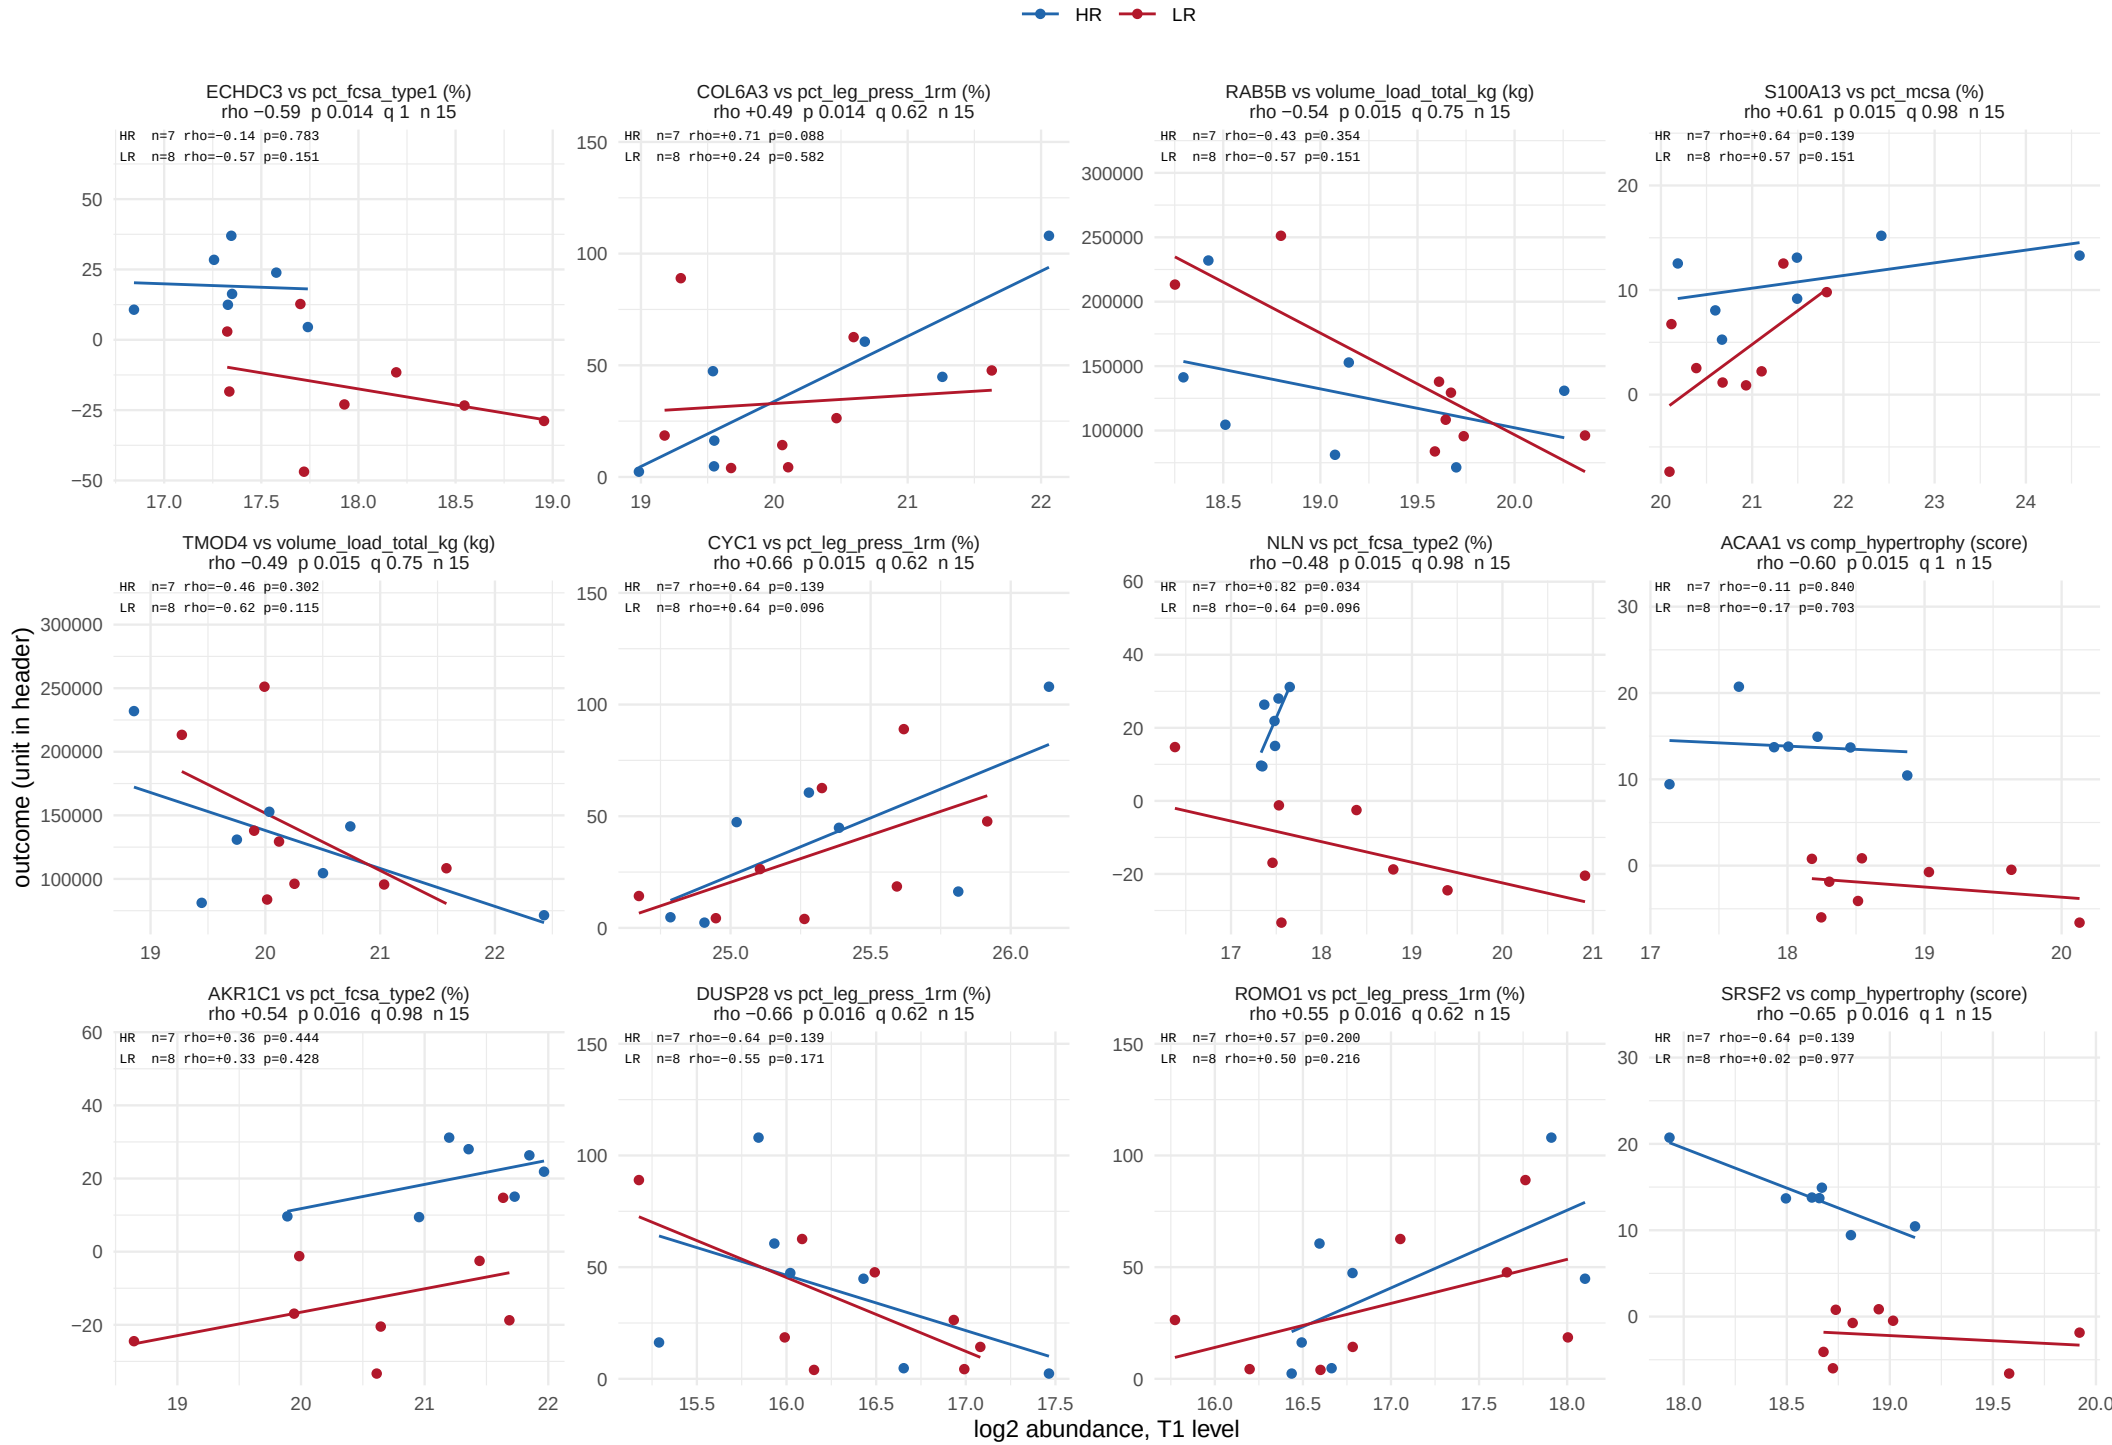

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


695 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 15 of 58.

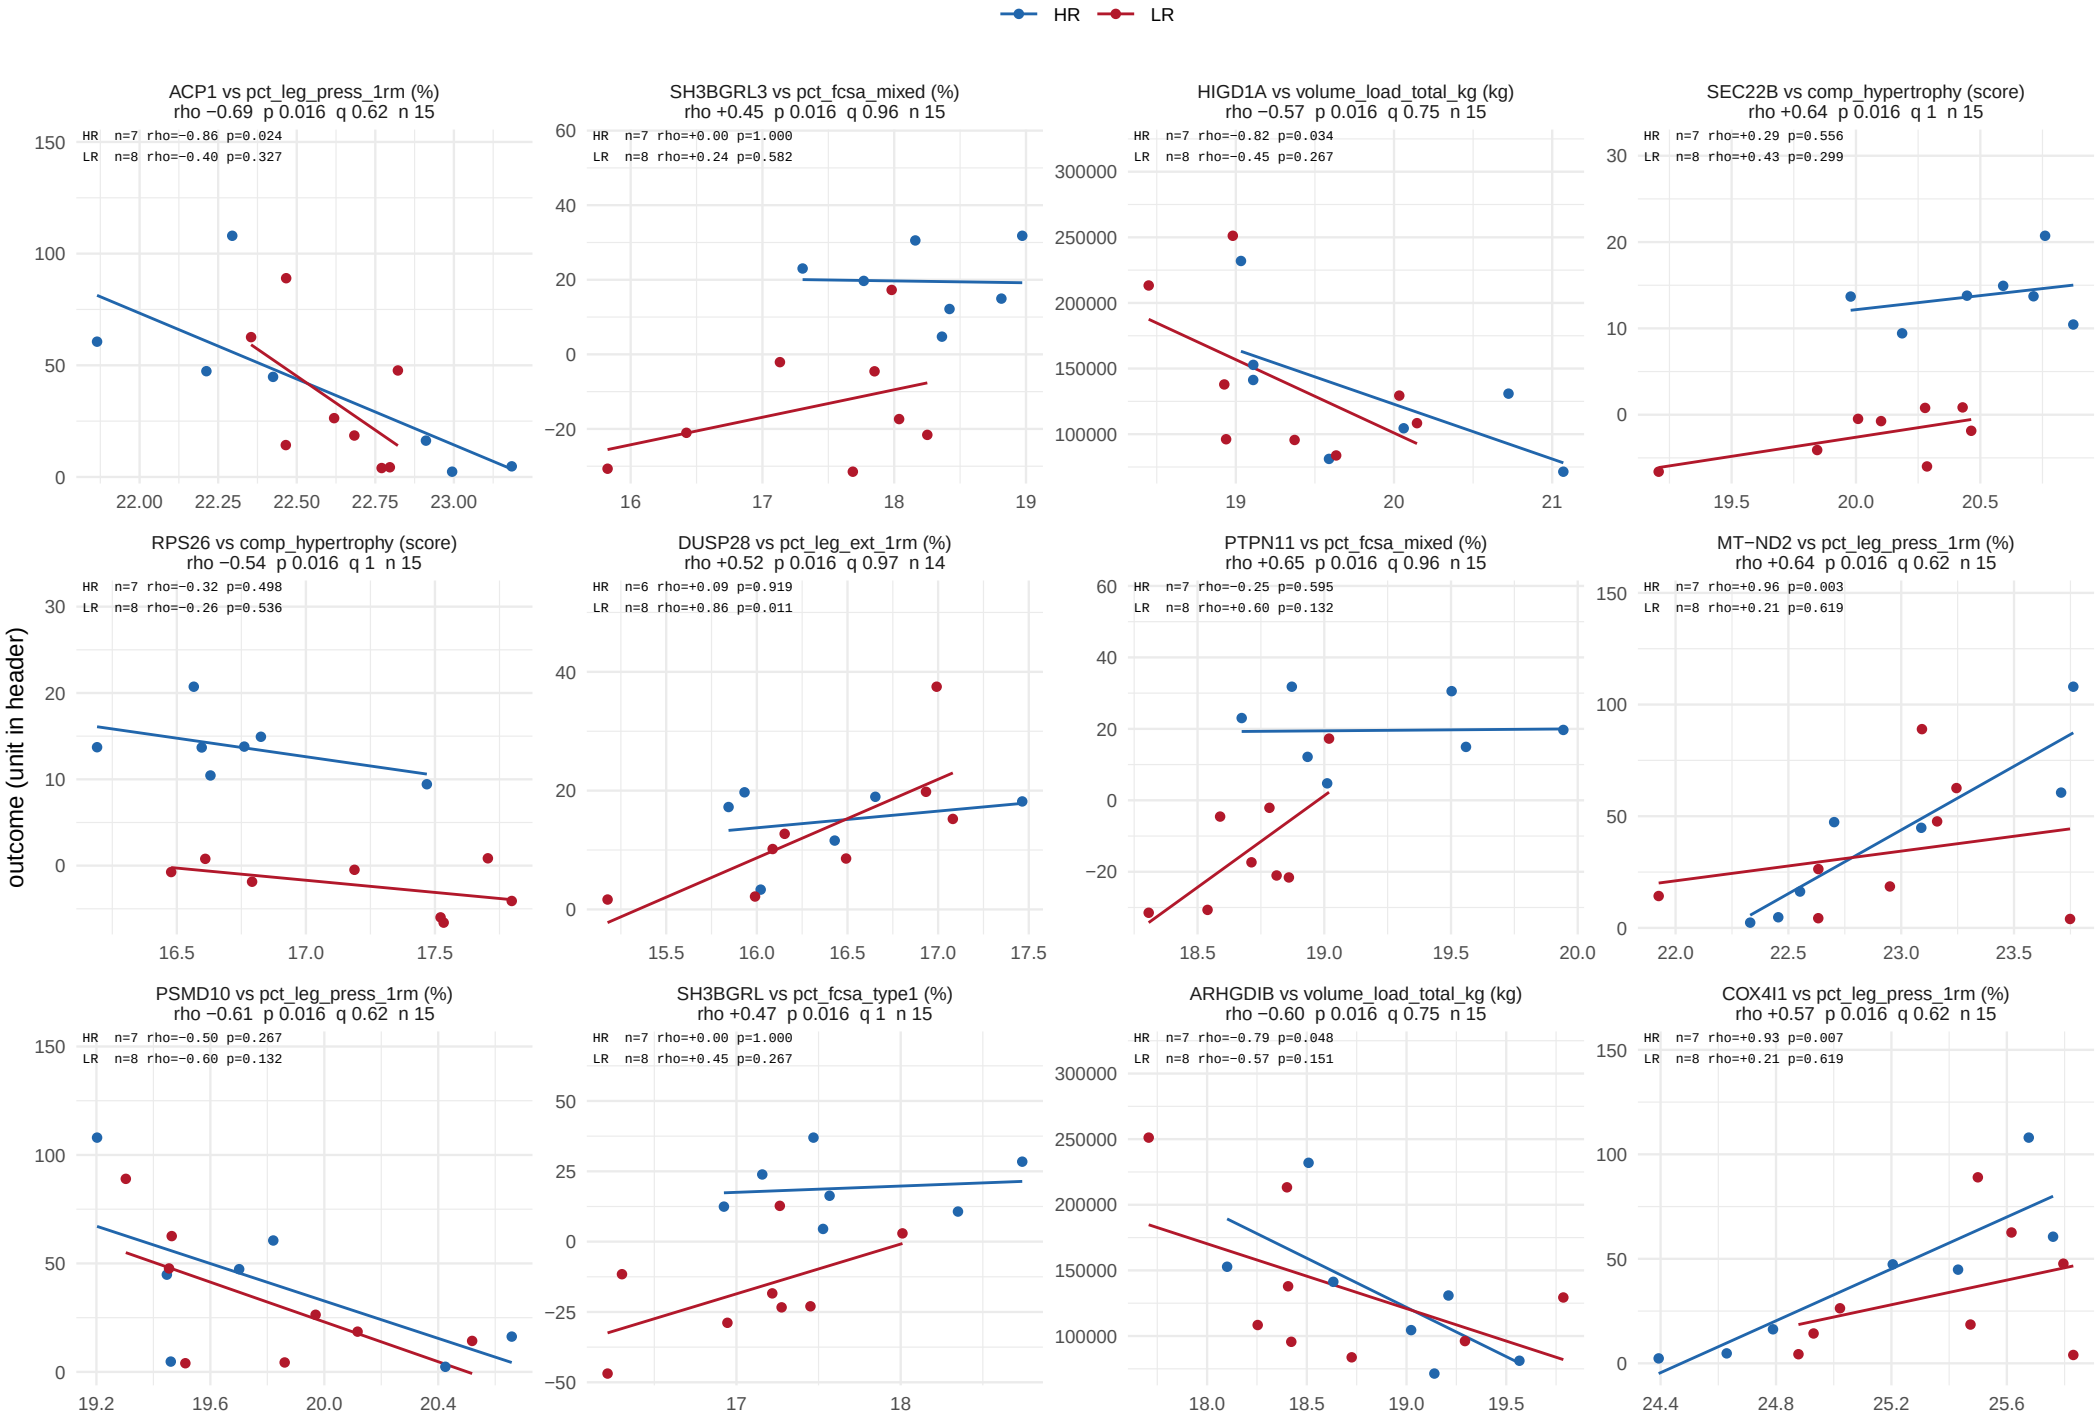

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


695 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 16 of 58.

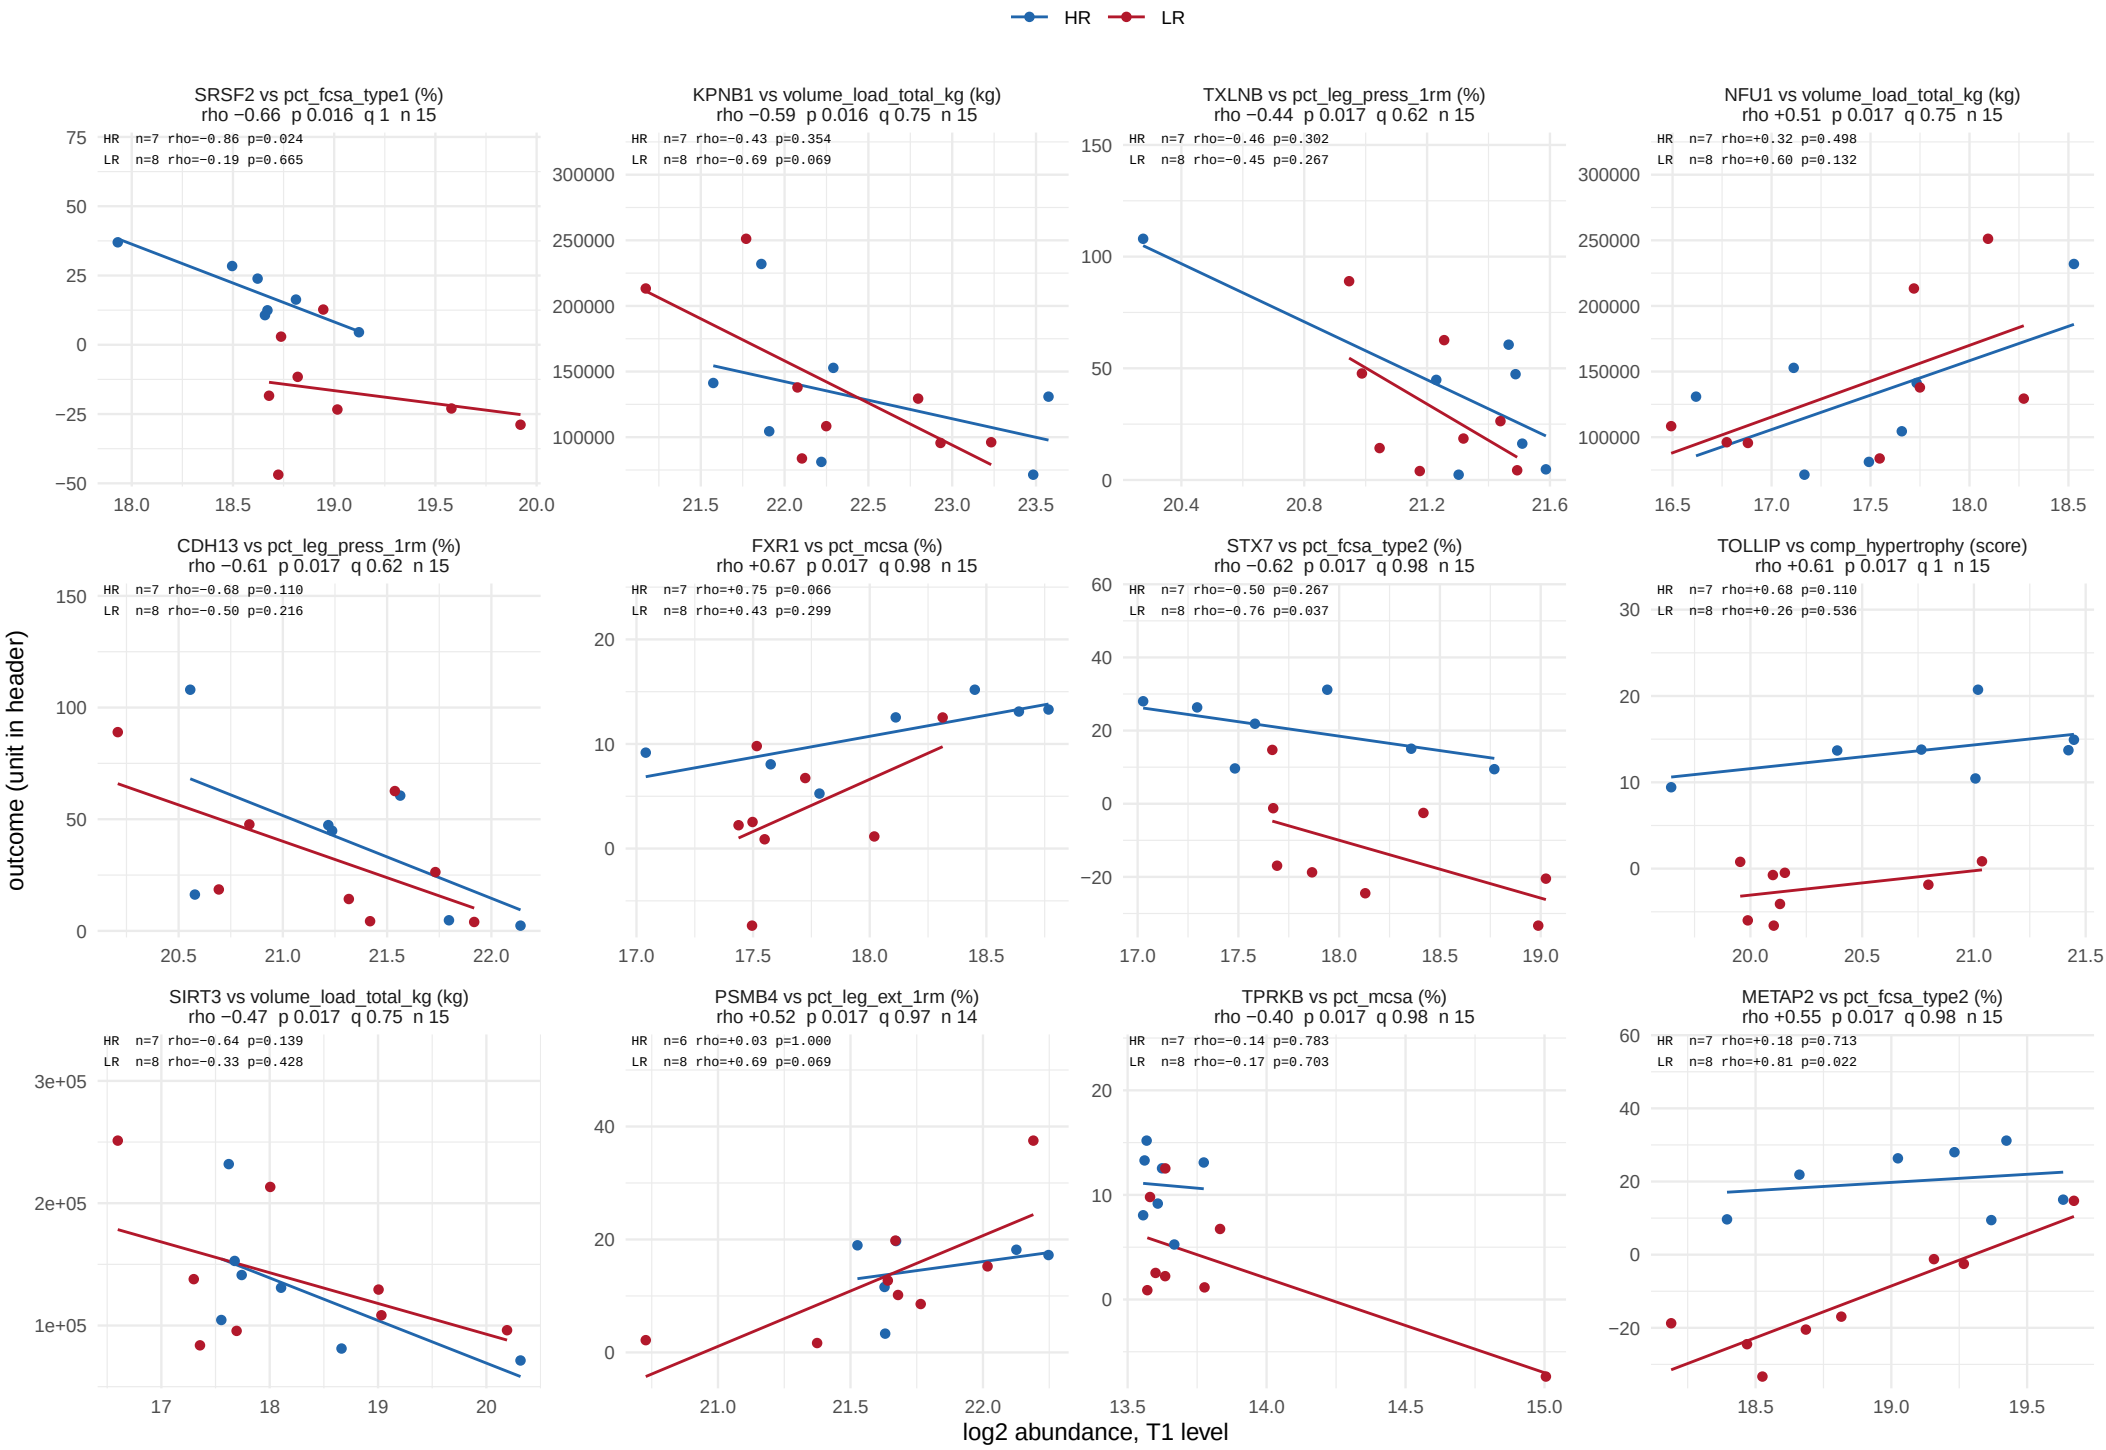

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


695 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 17 of 58.

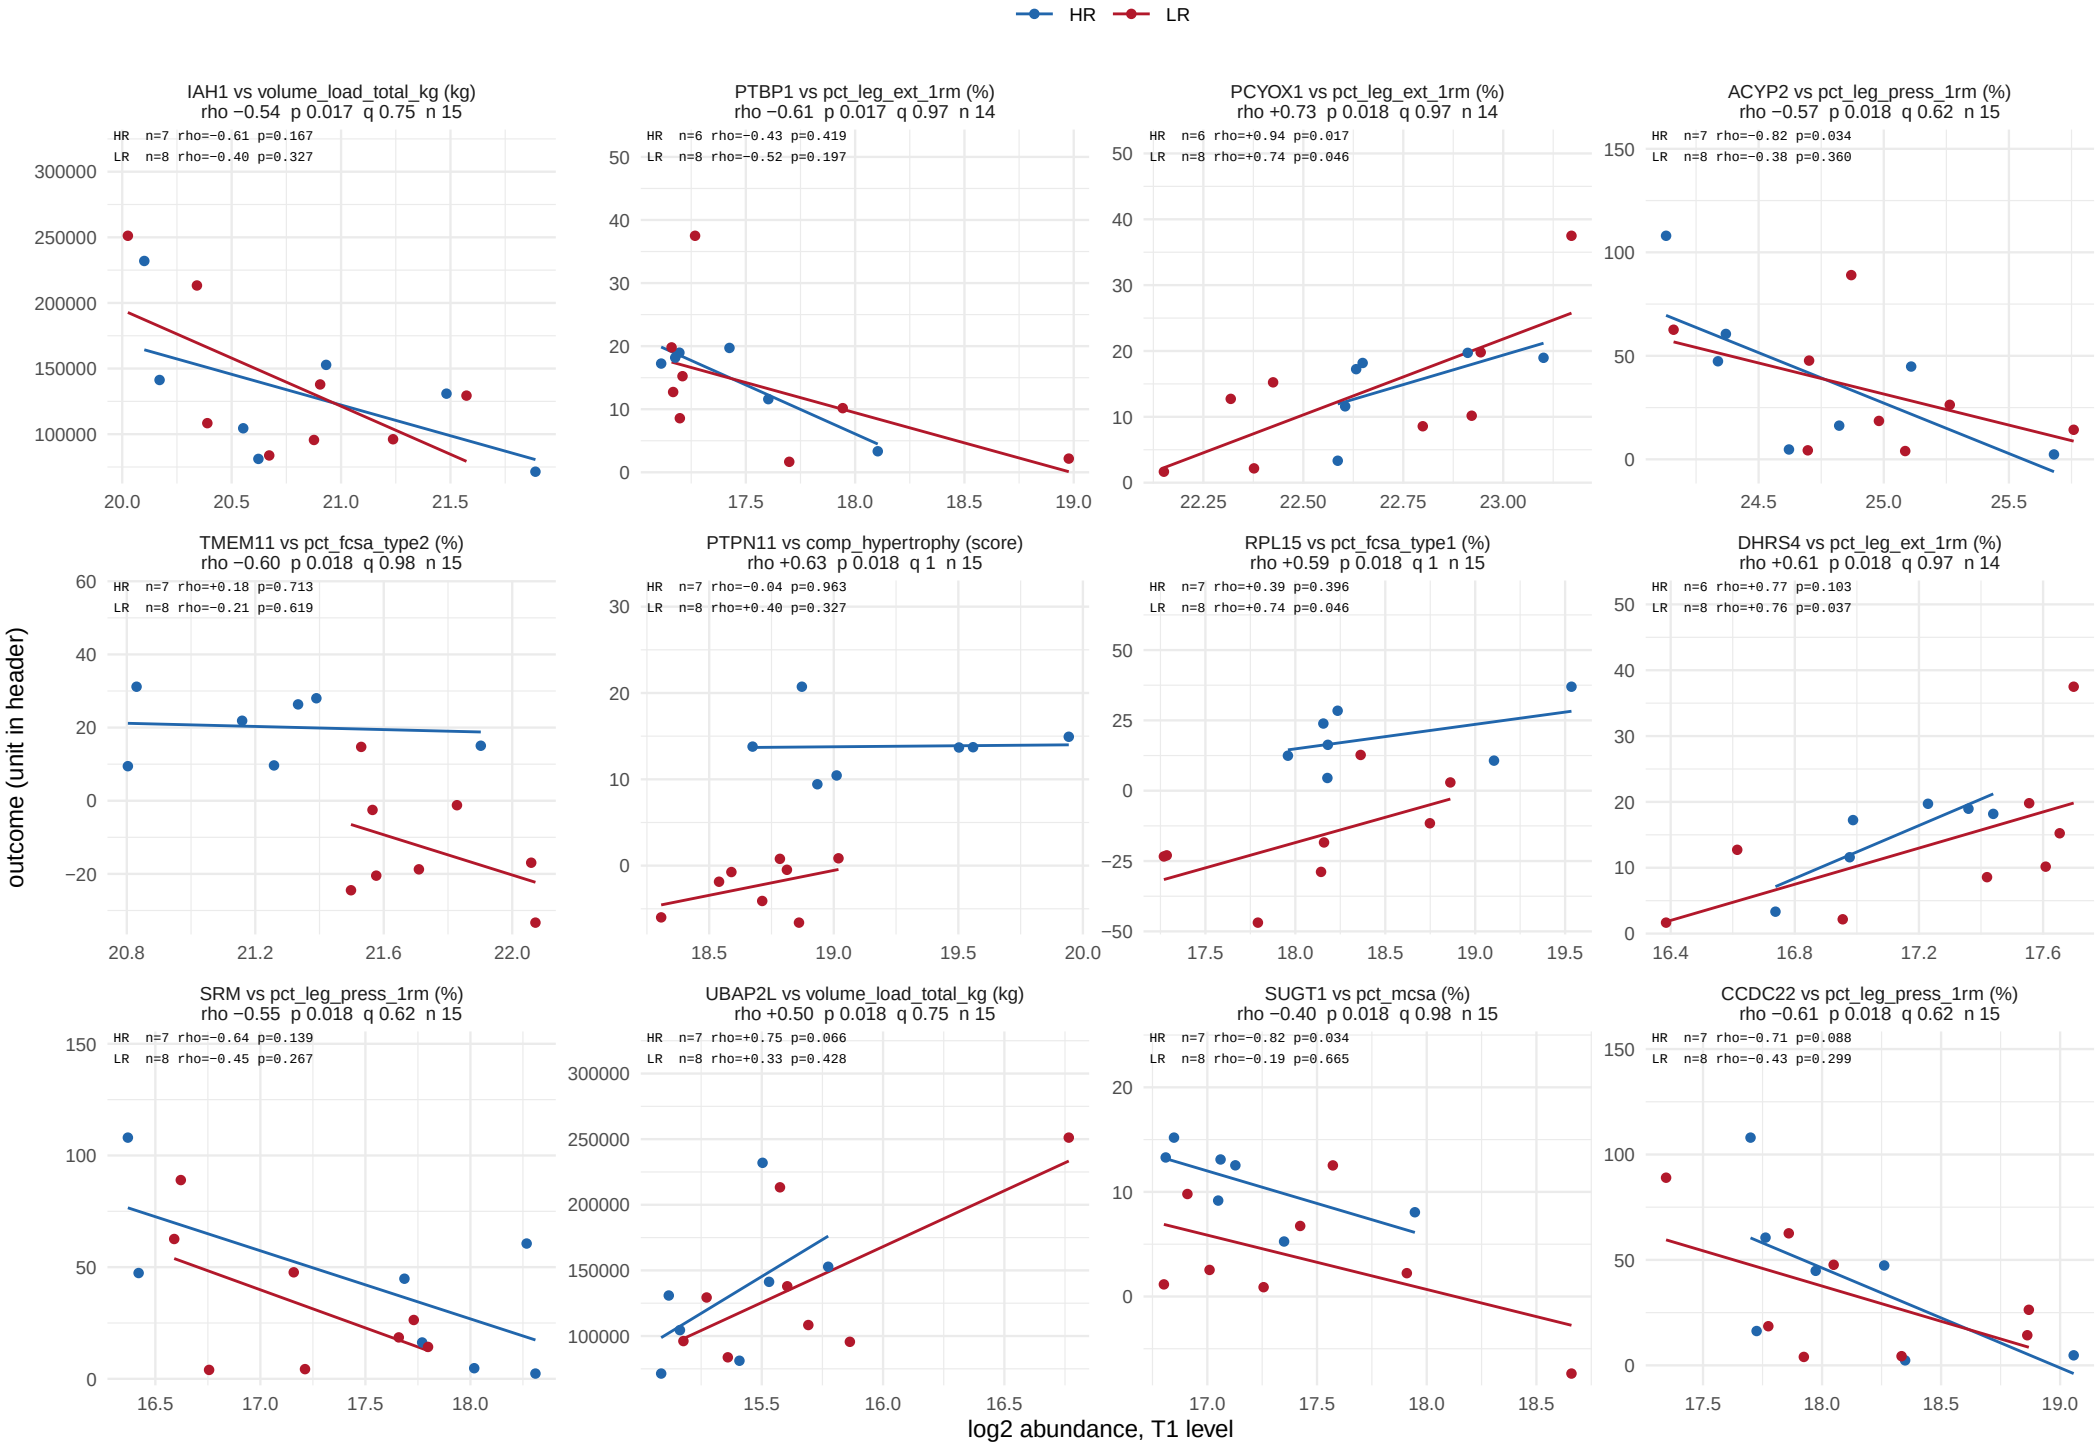

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


695 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 18 of 58.

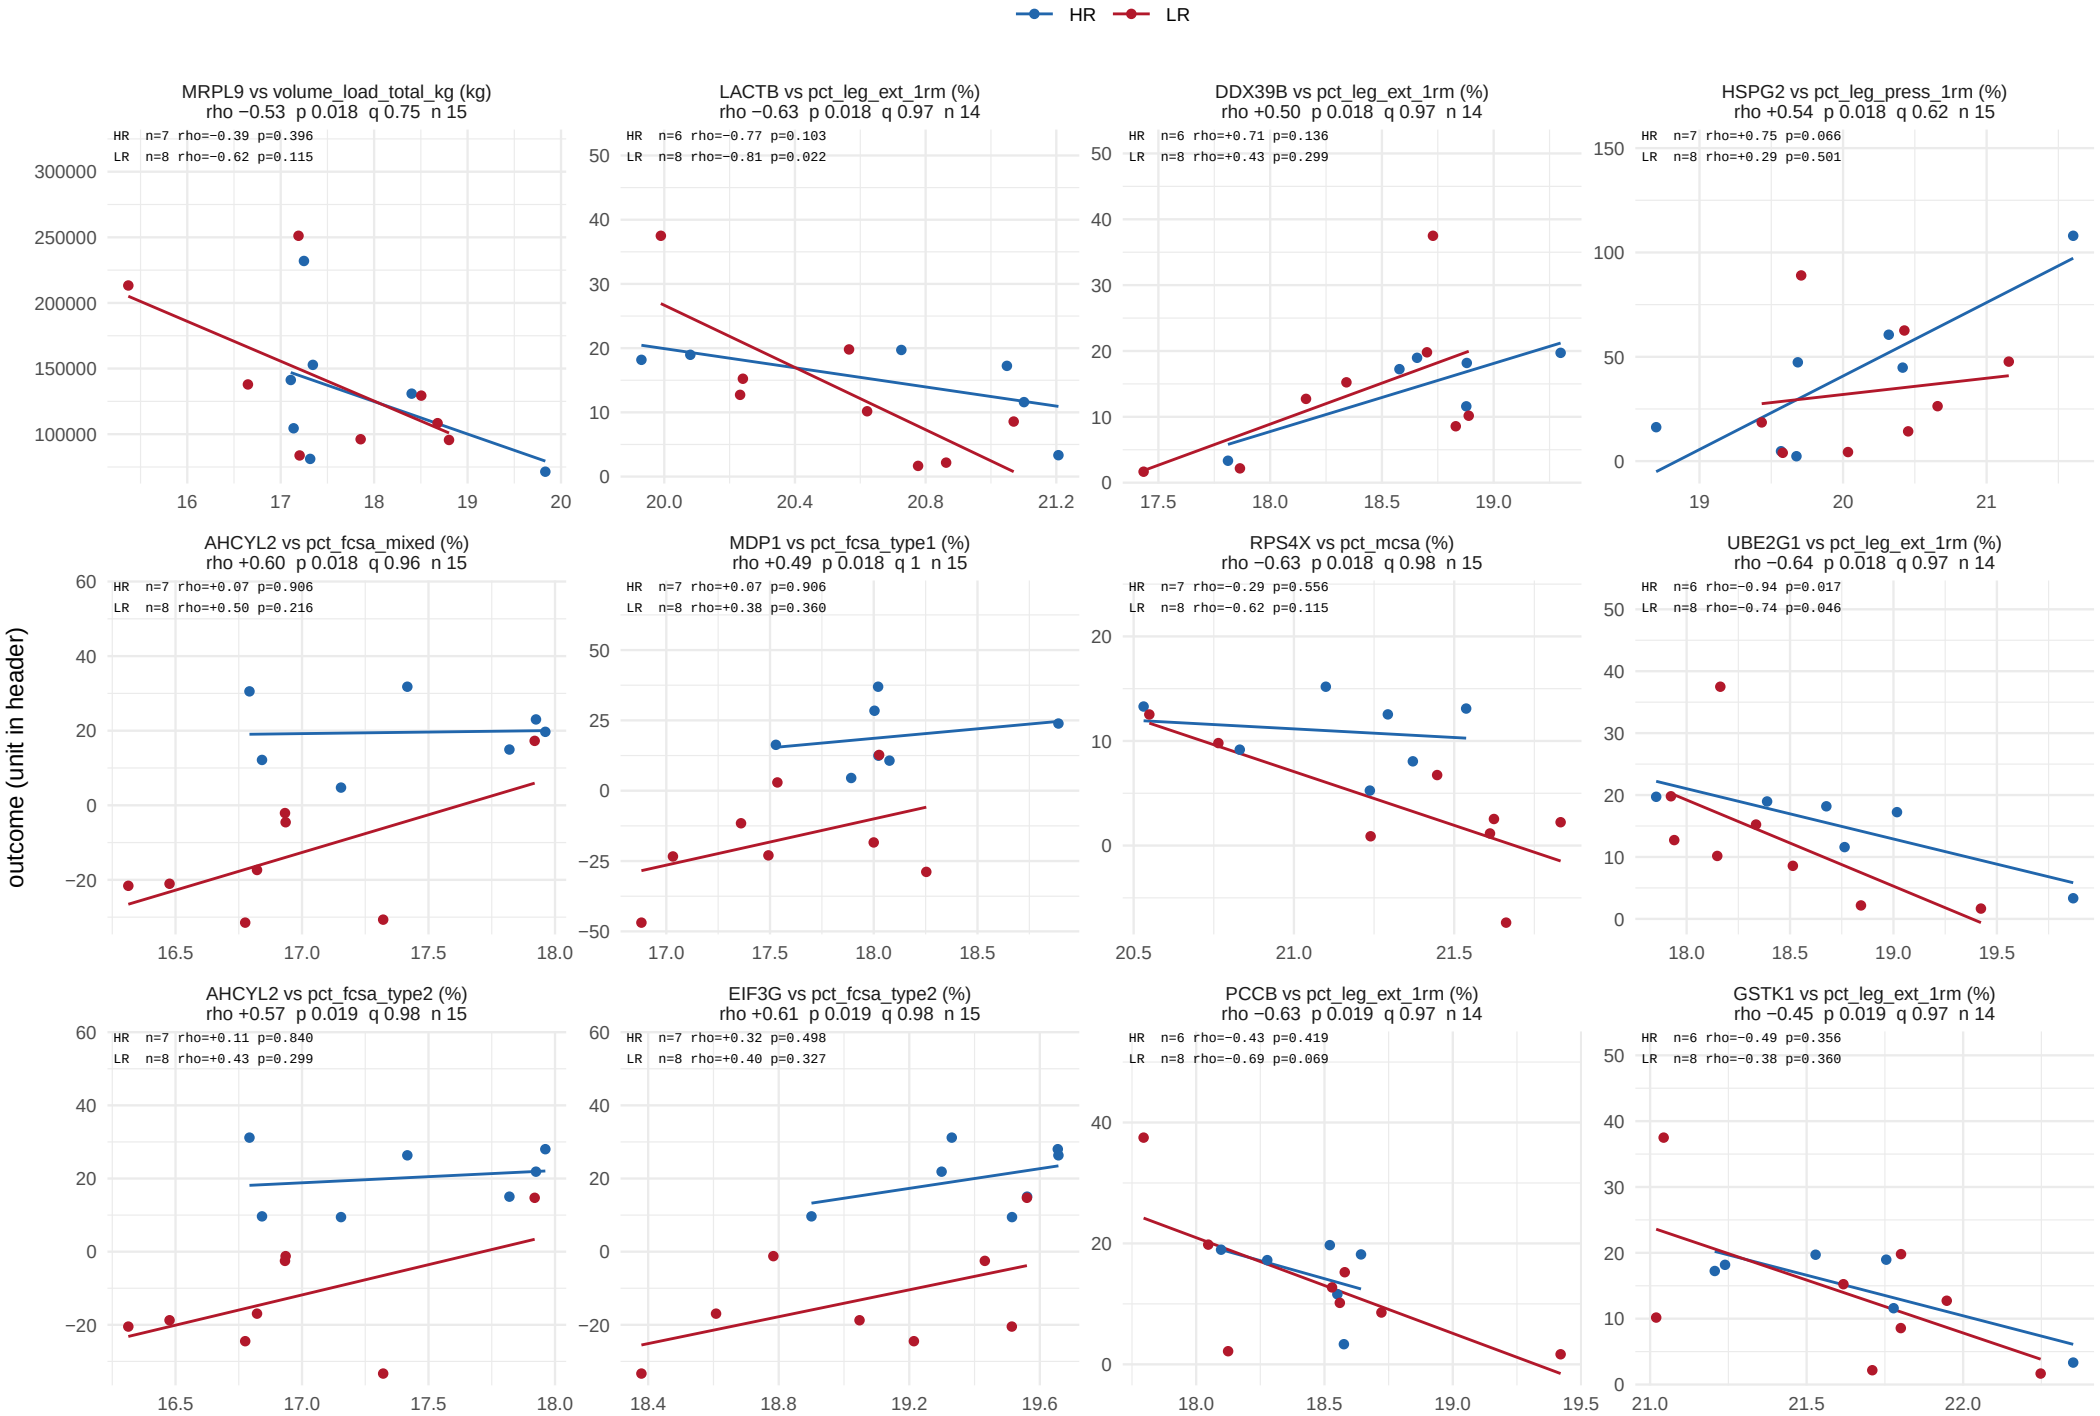

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


695 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 19 of 58.

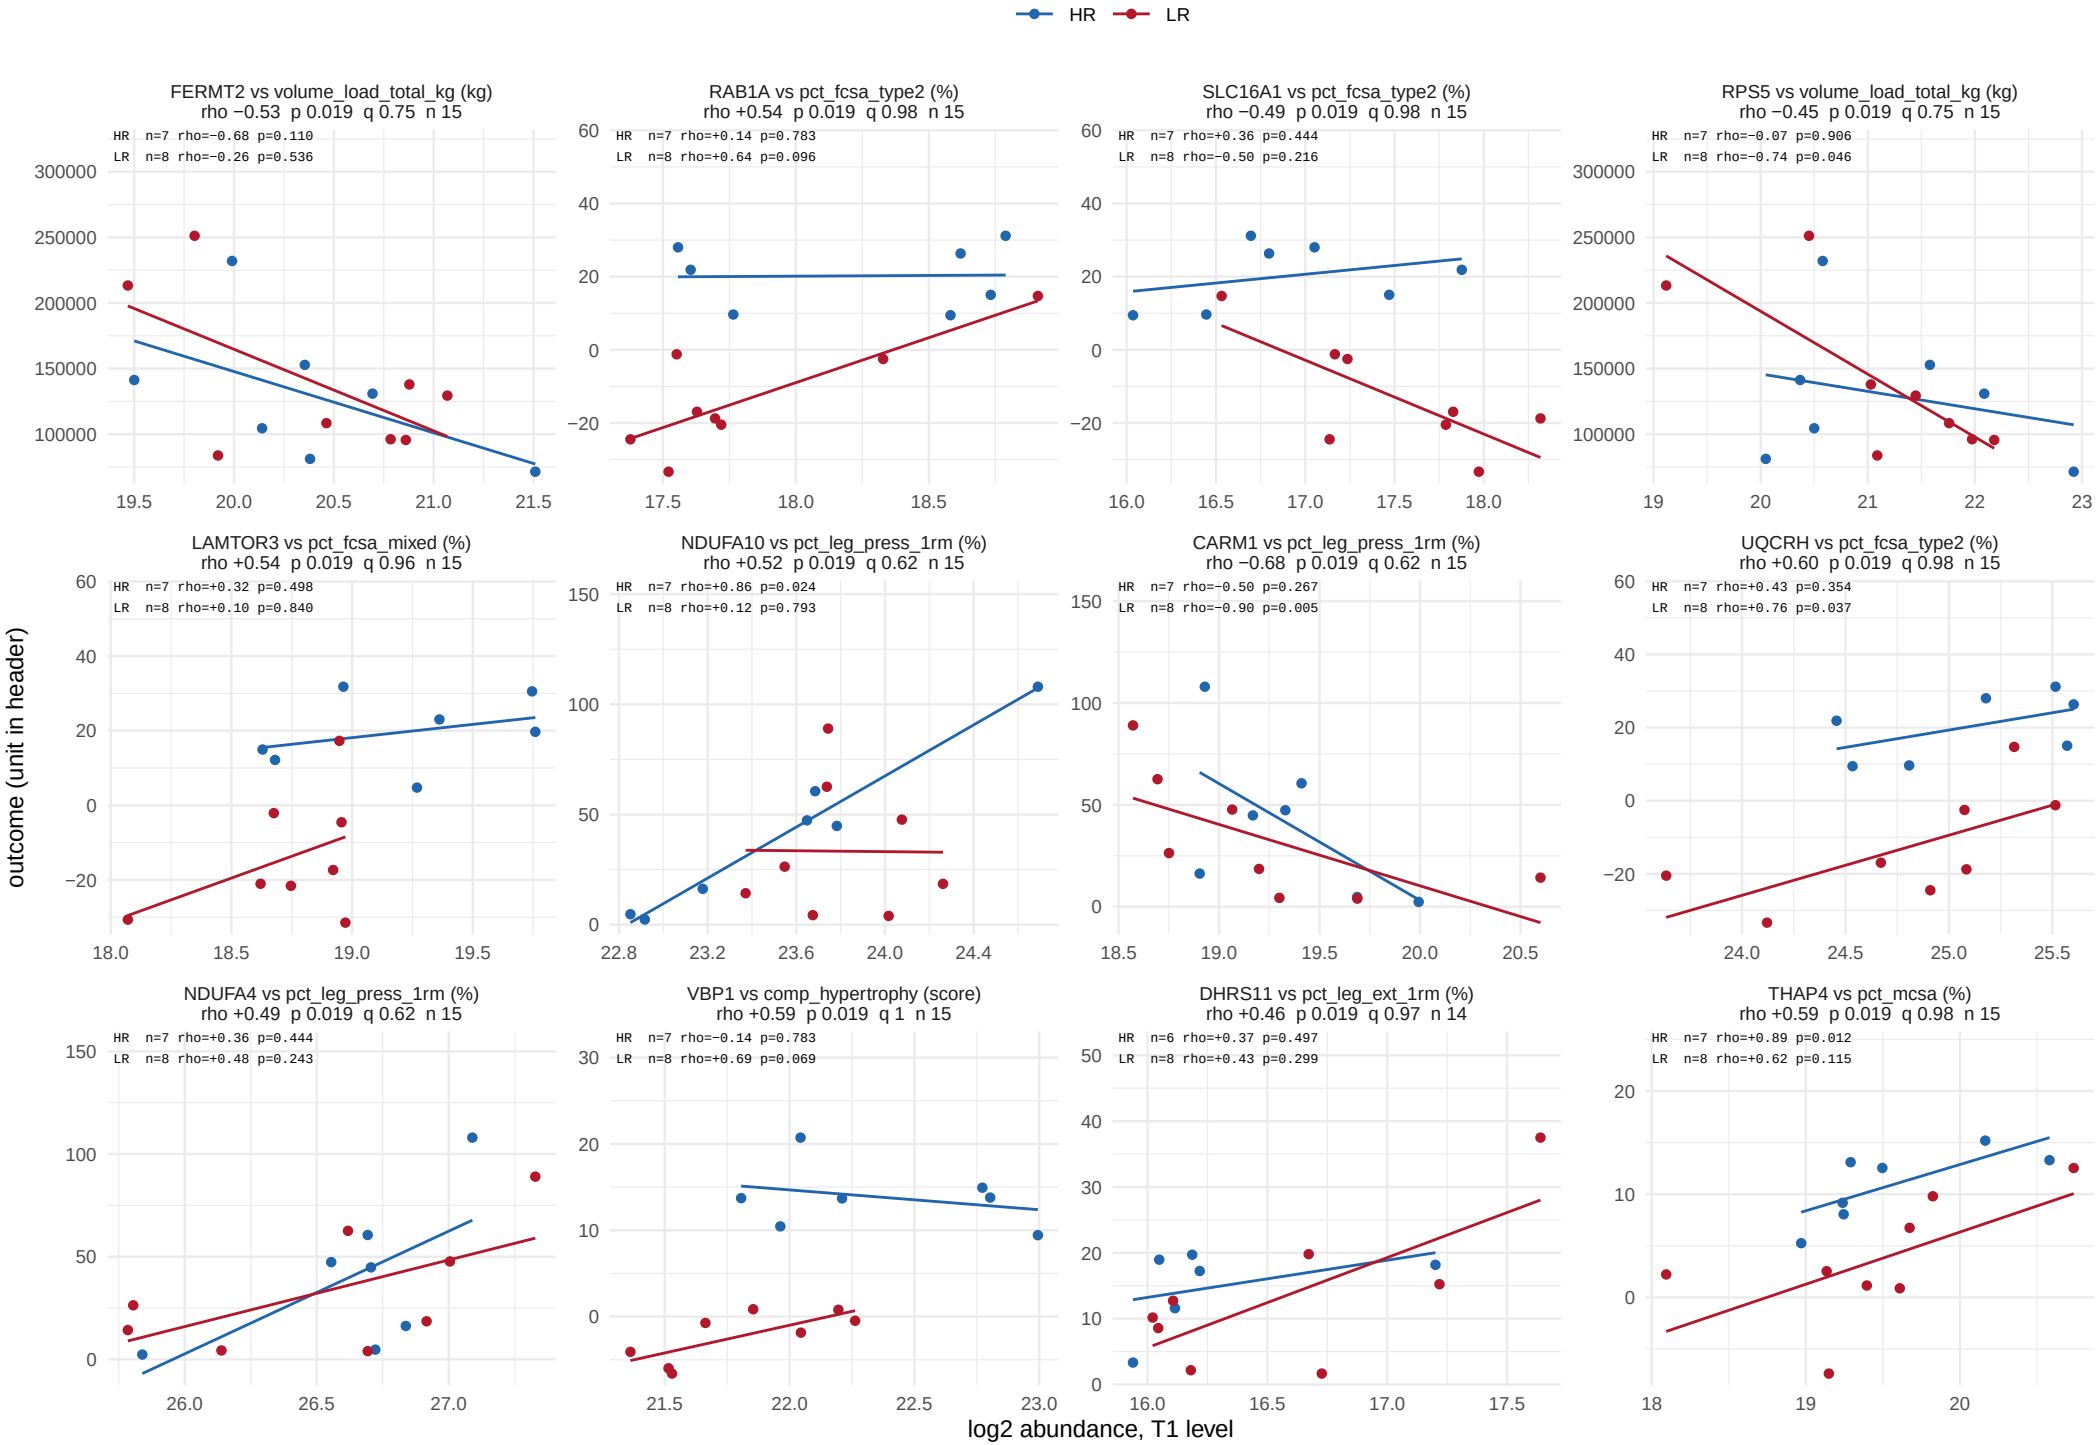

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


695 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 20 of 58.

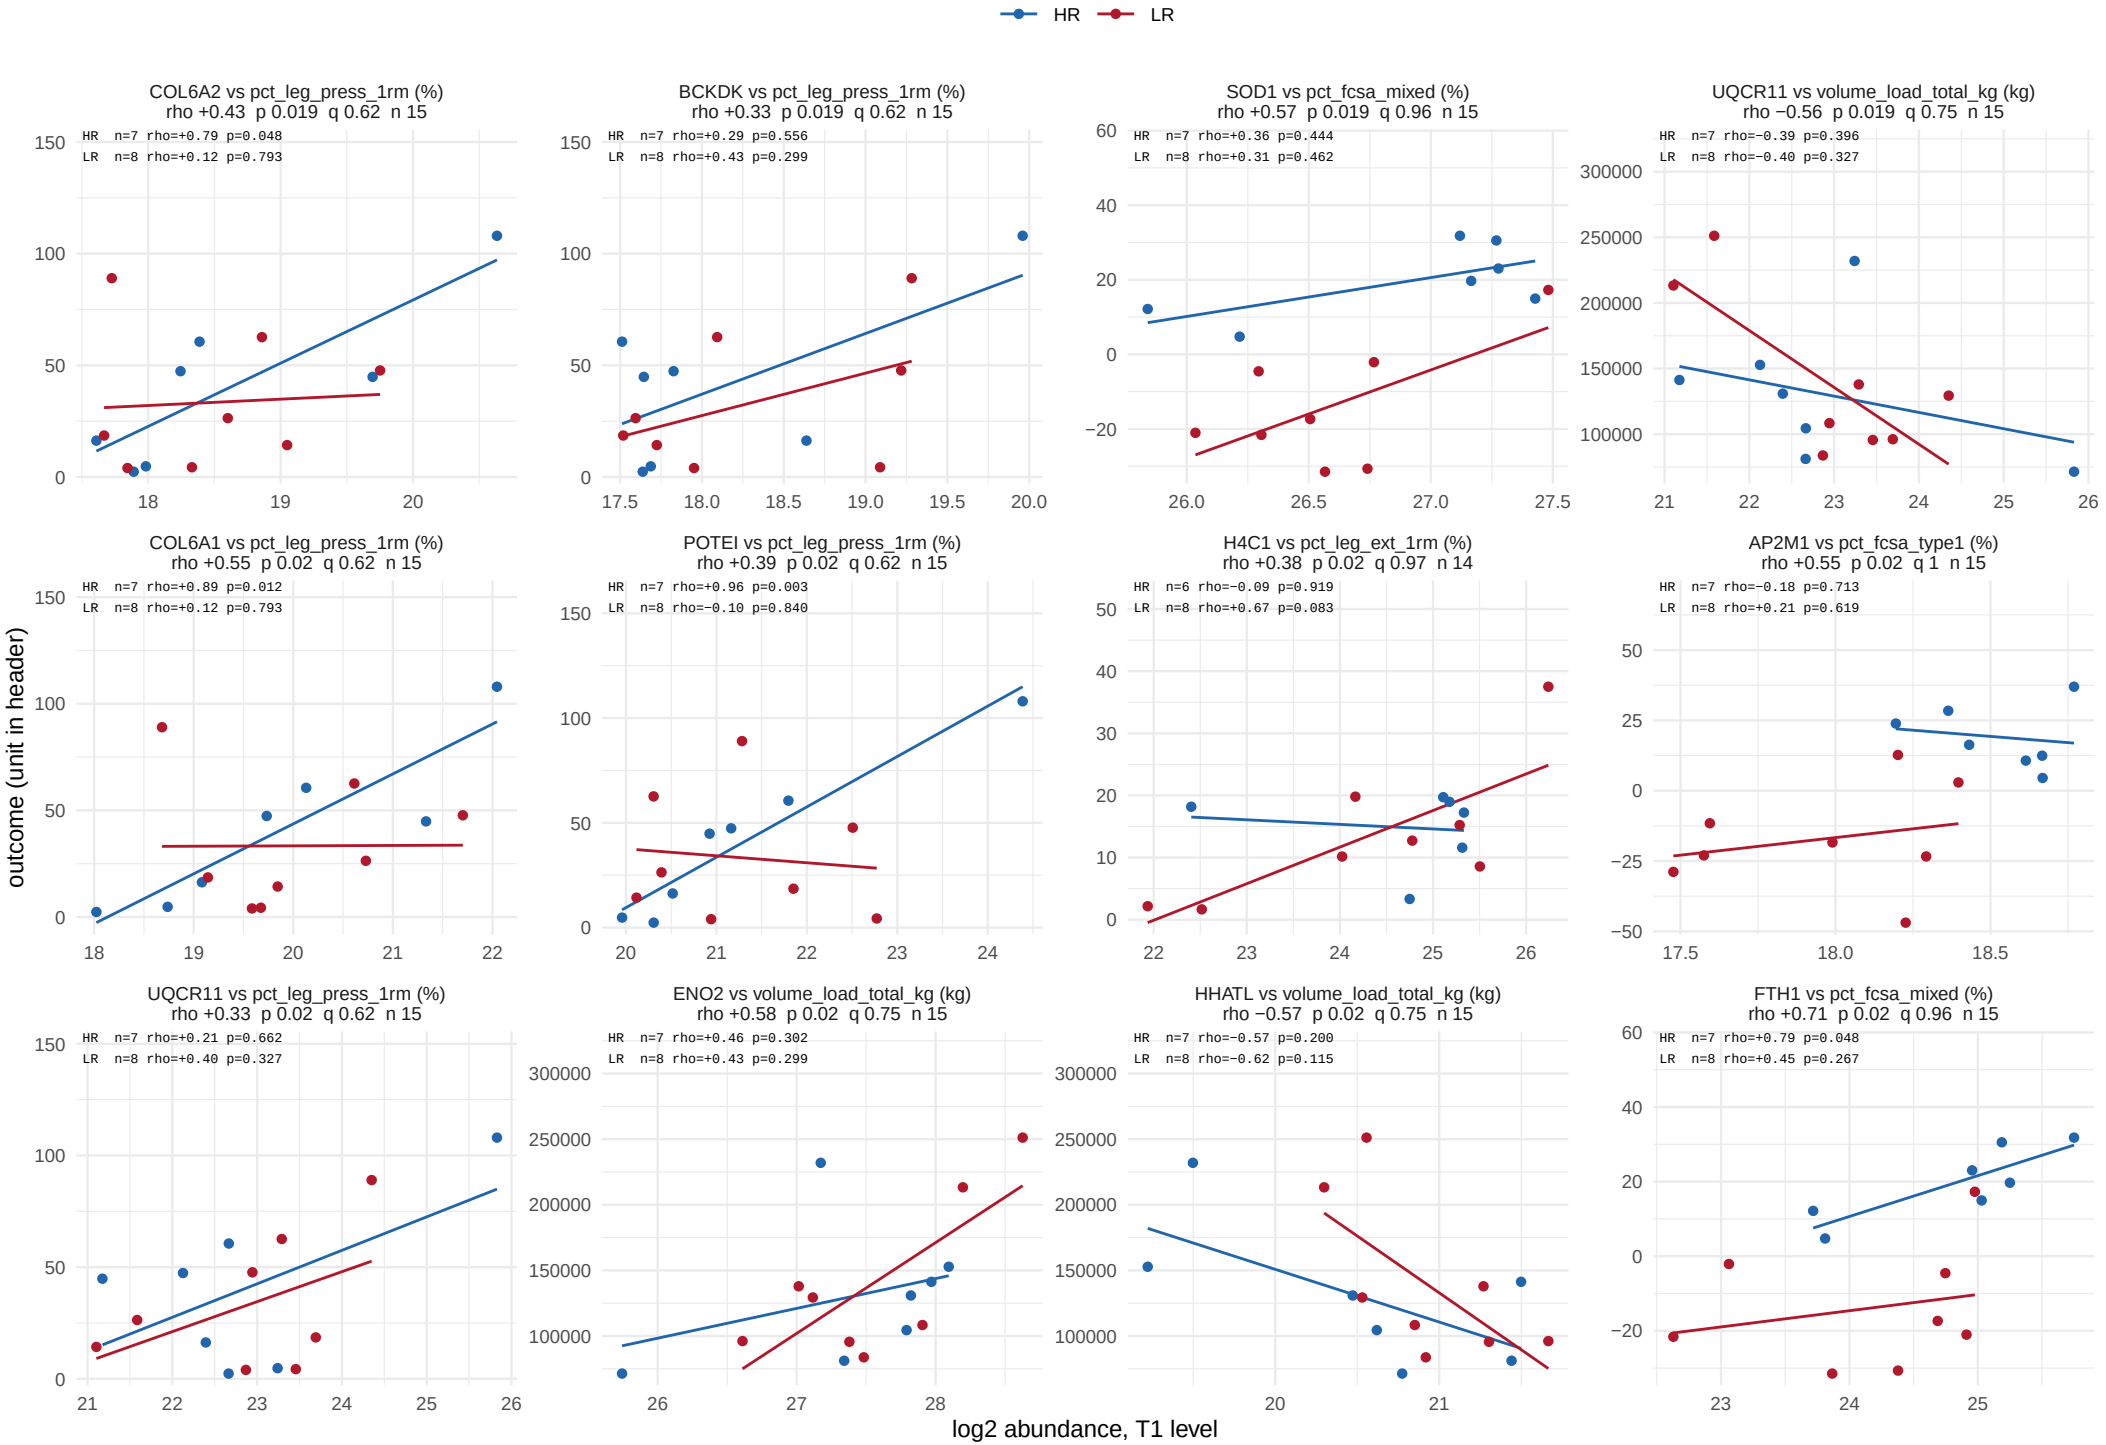

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


695 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 21 of 58.

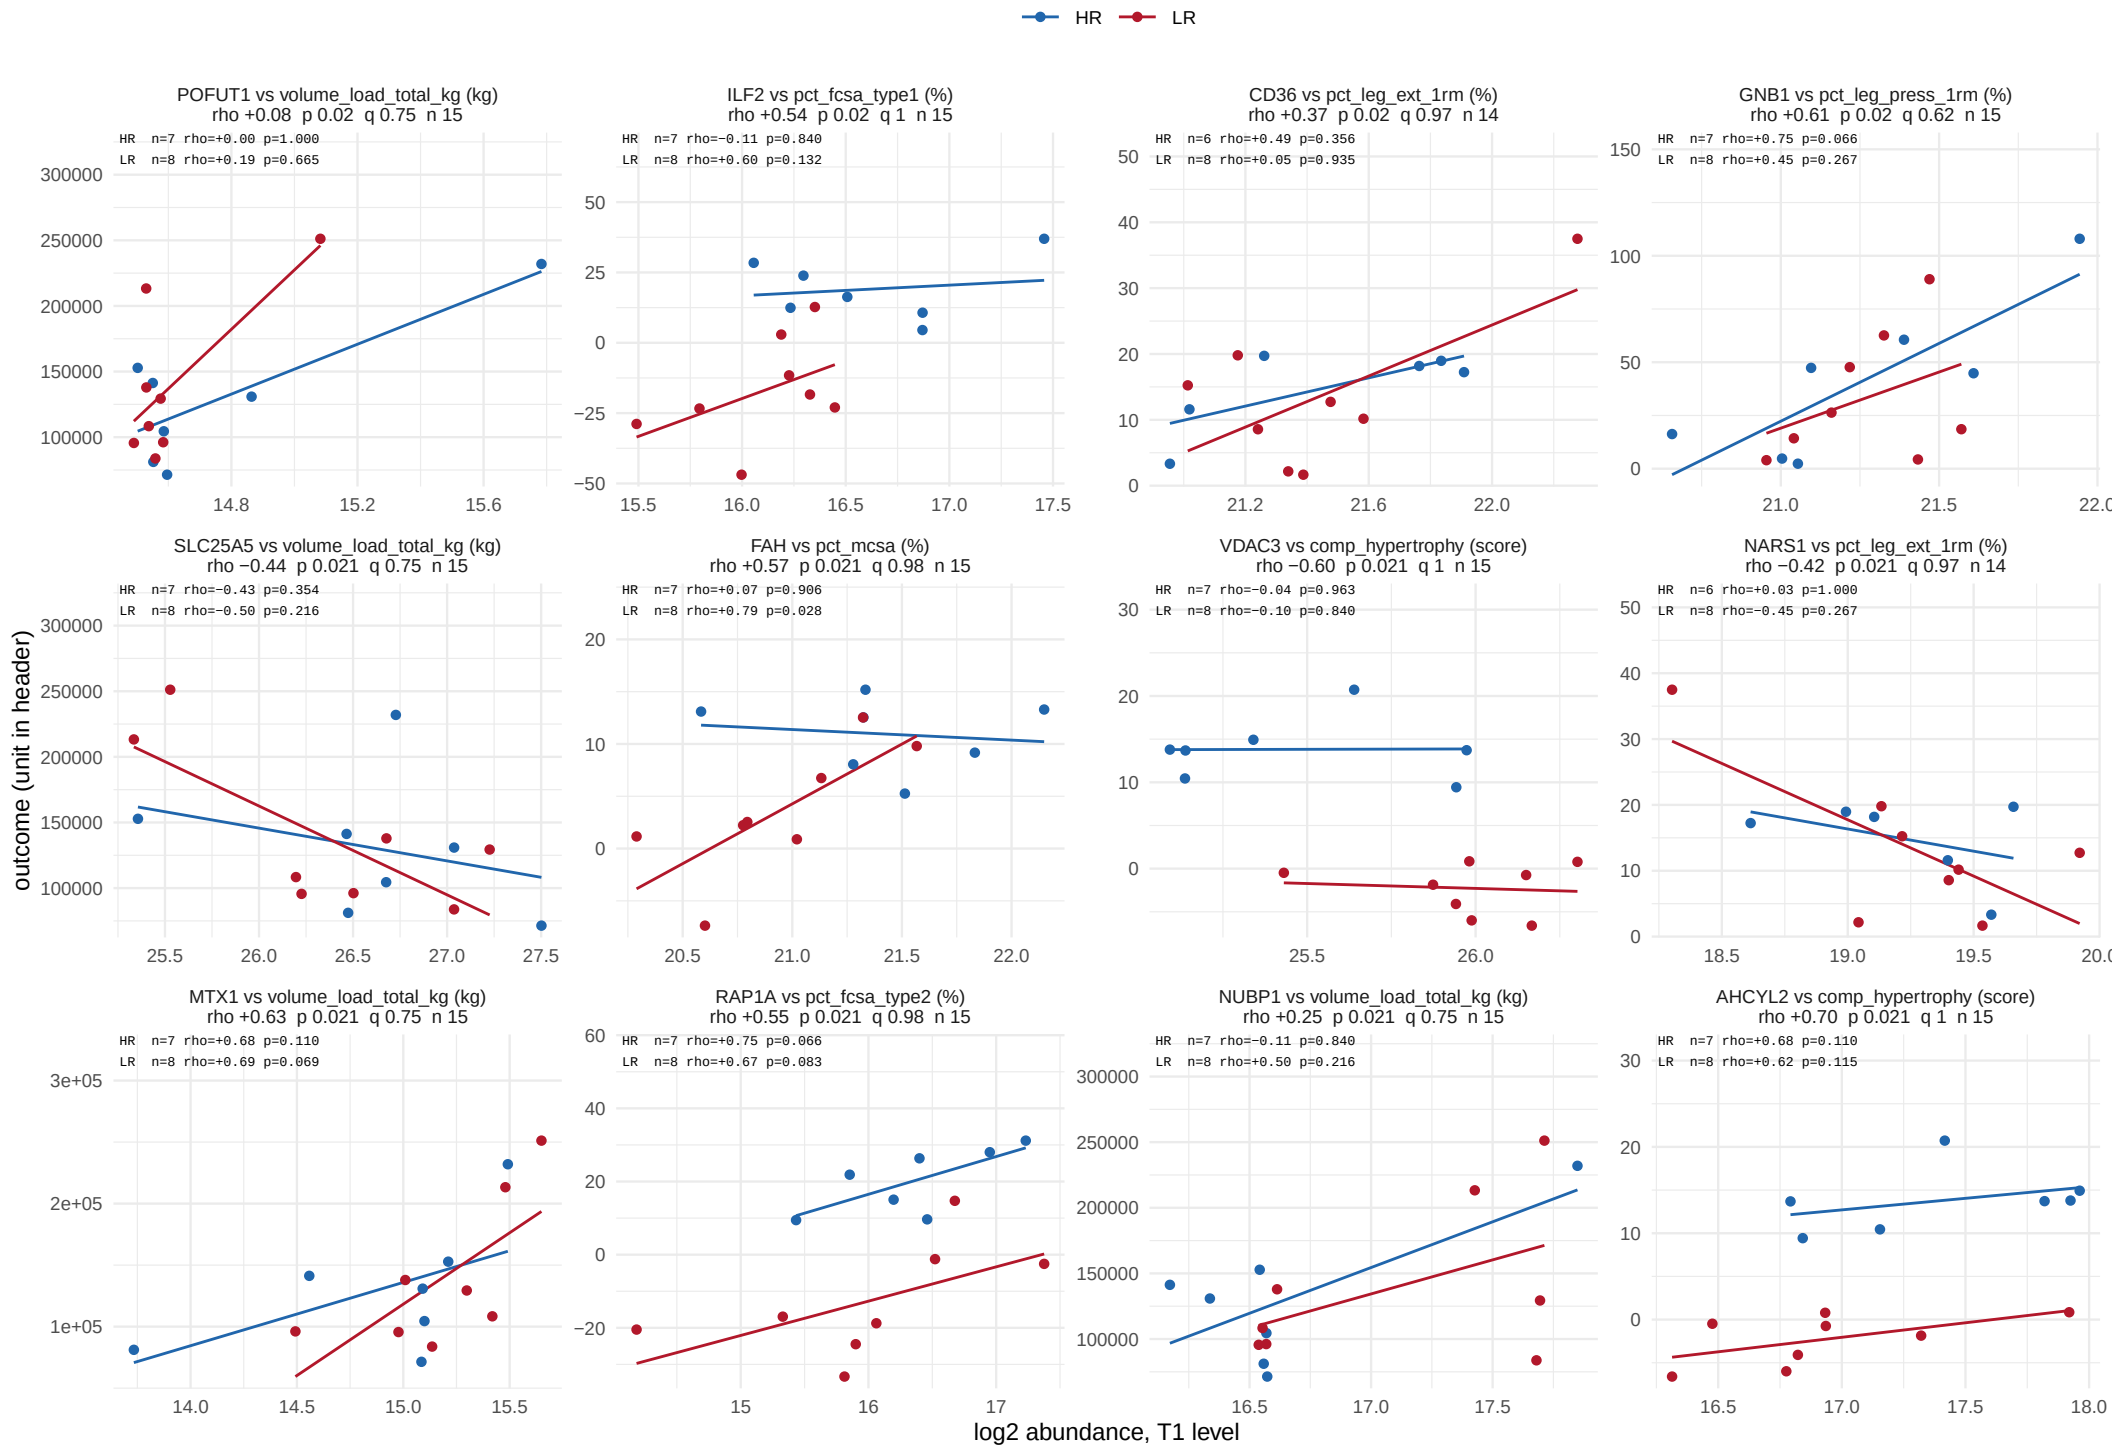

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


695 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 22 of 58.

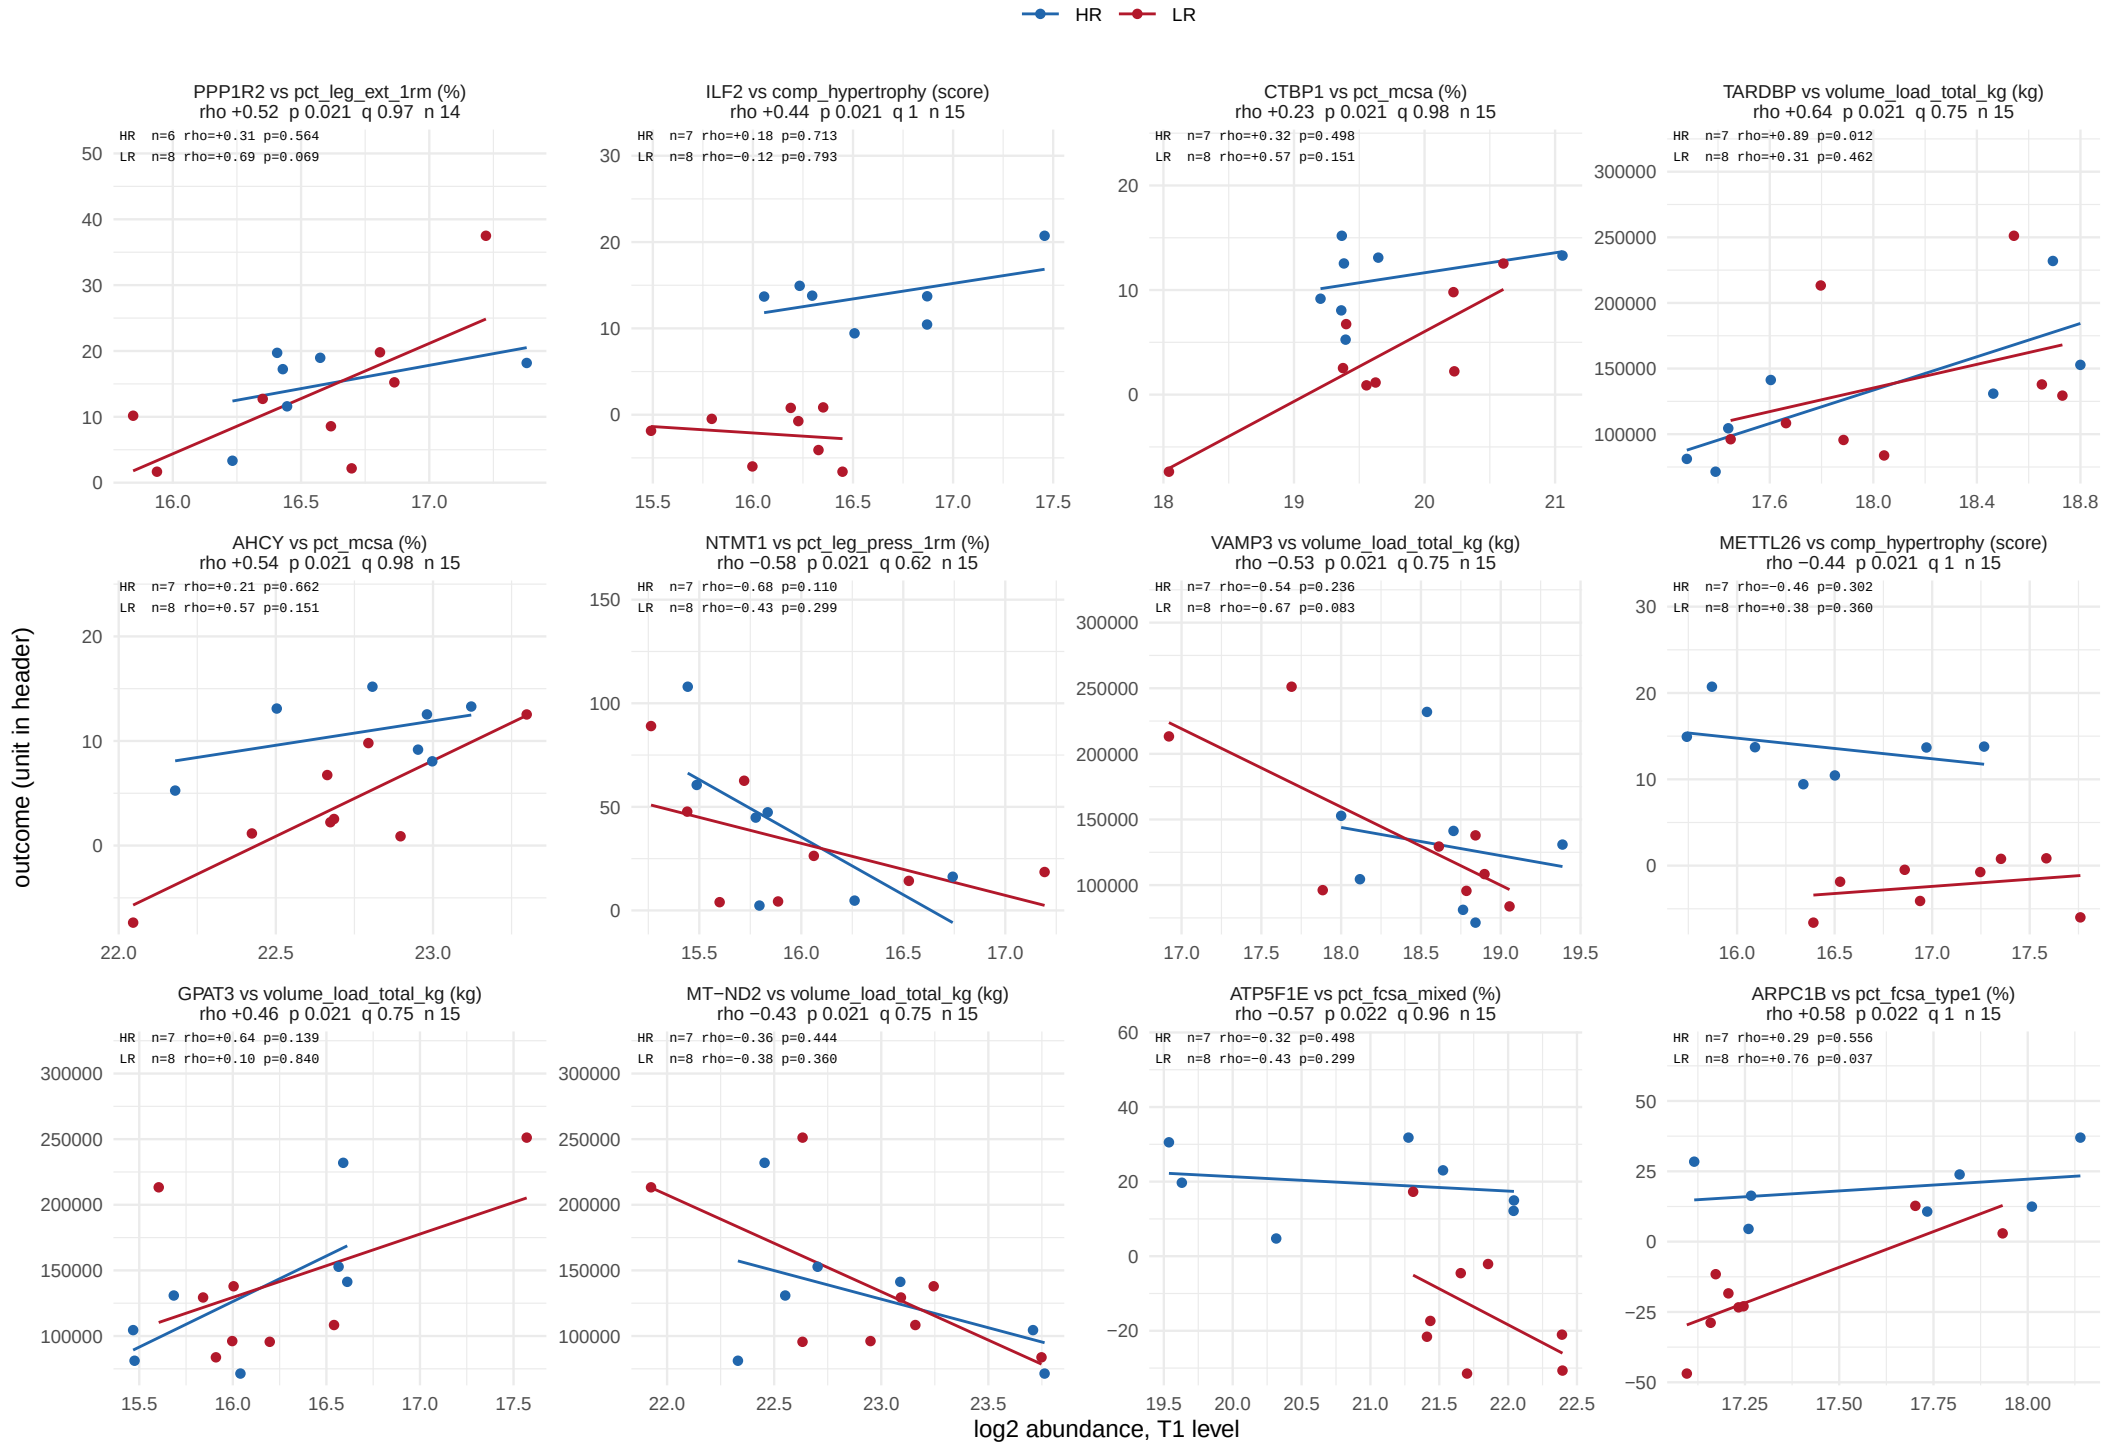

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


695 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 23 of 58.

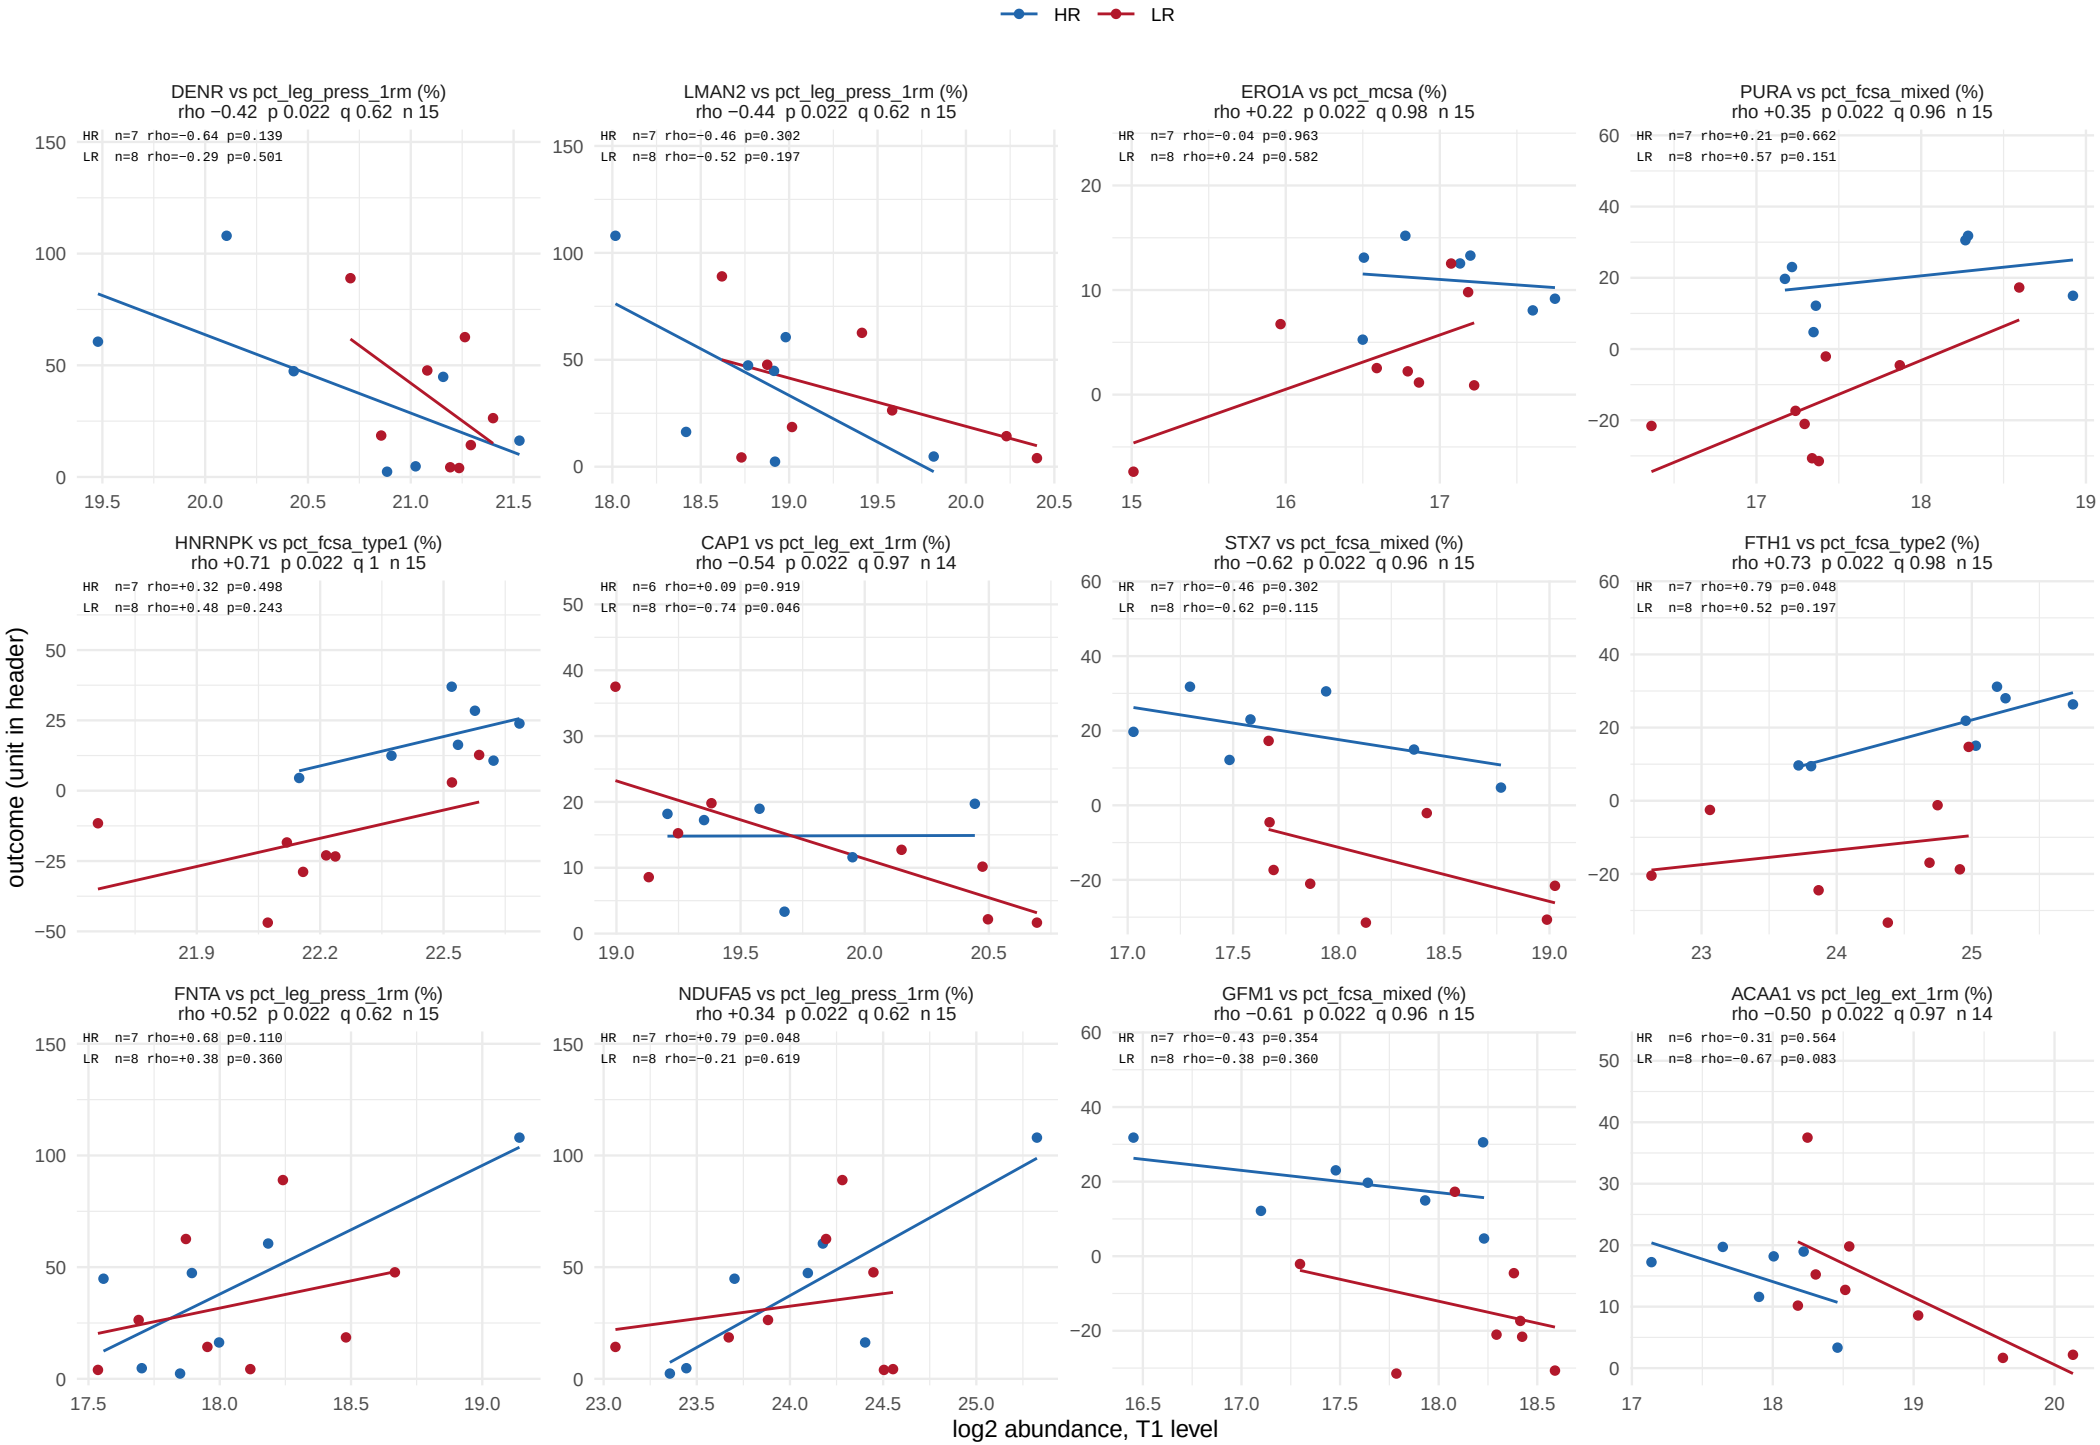

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


695 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 24 of 58.

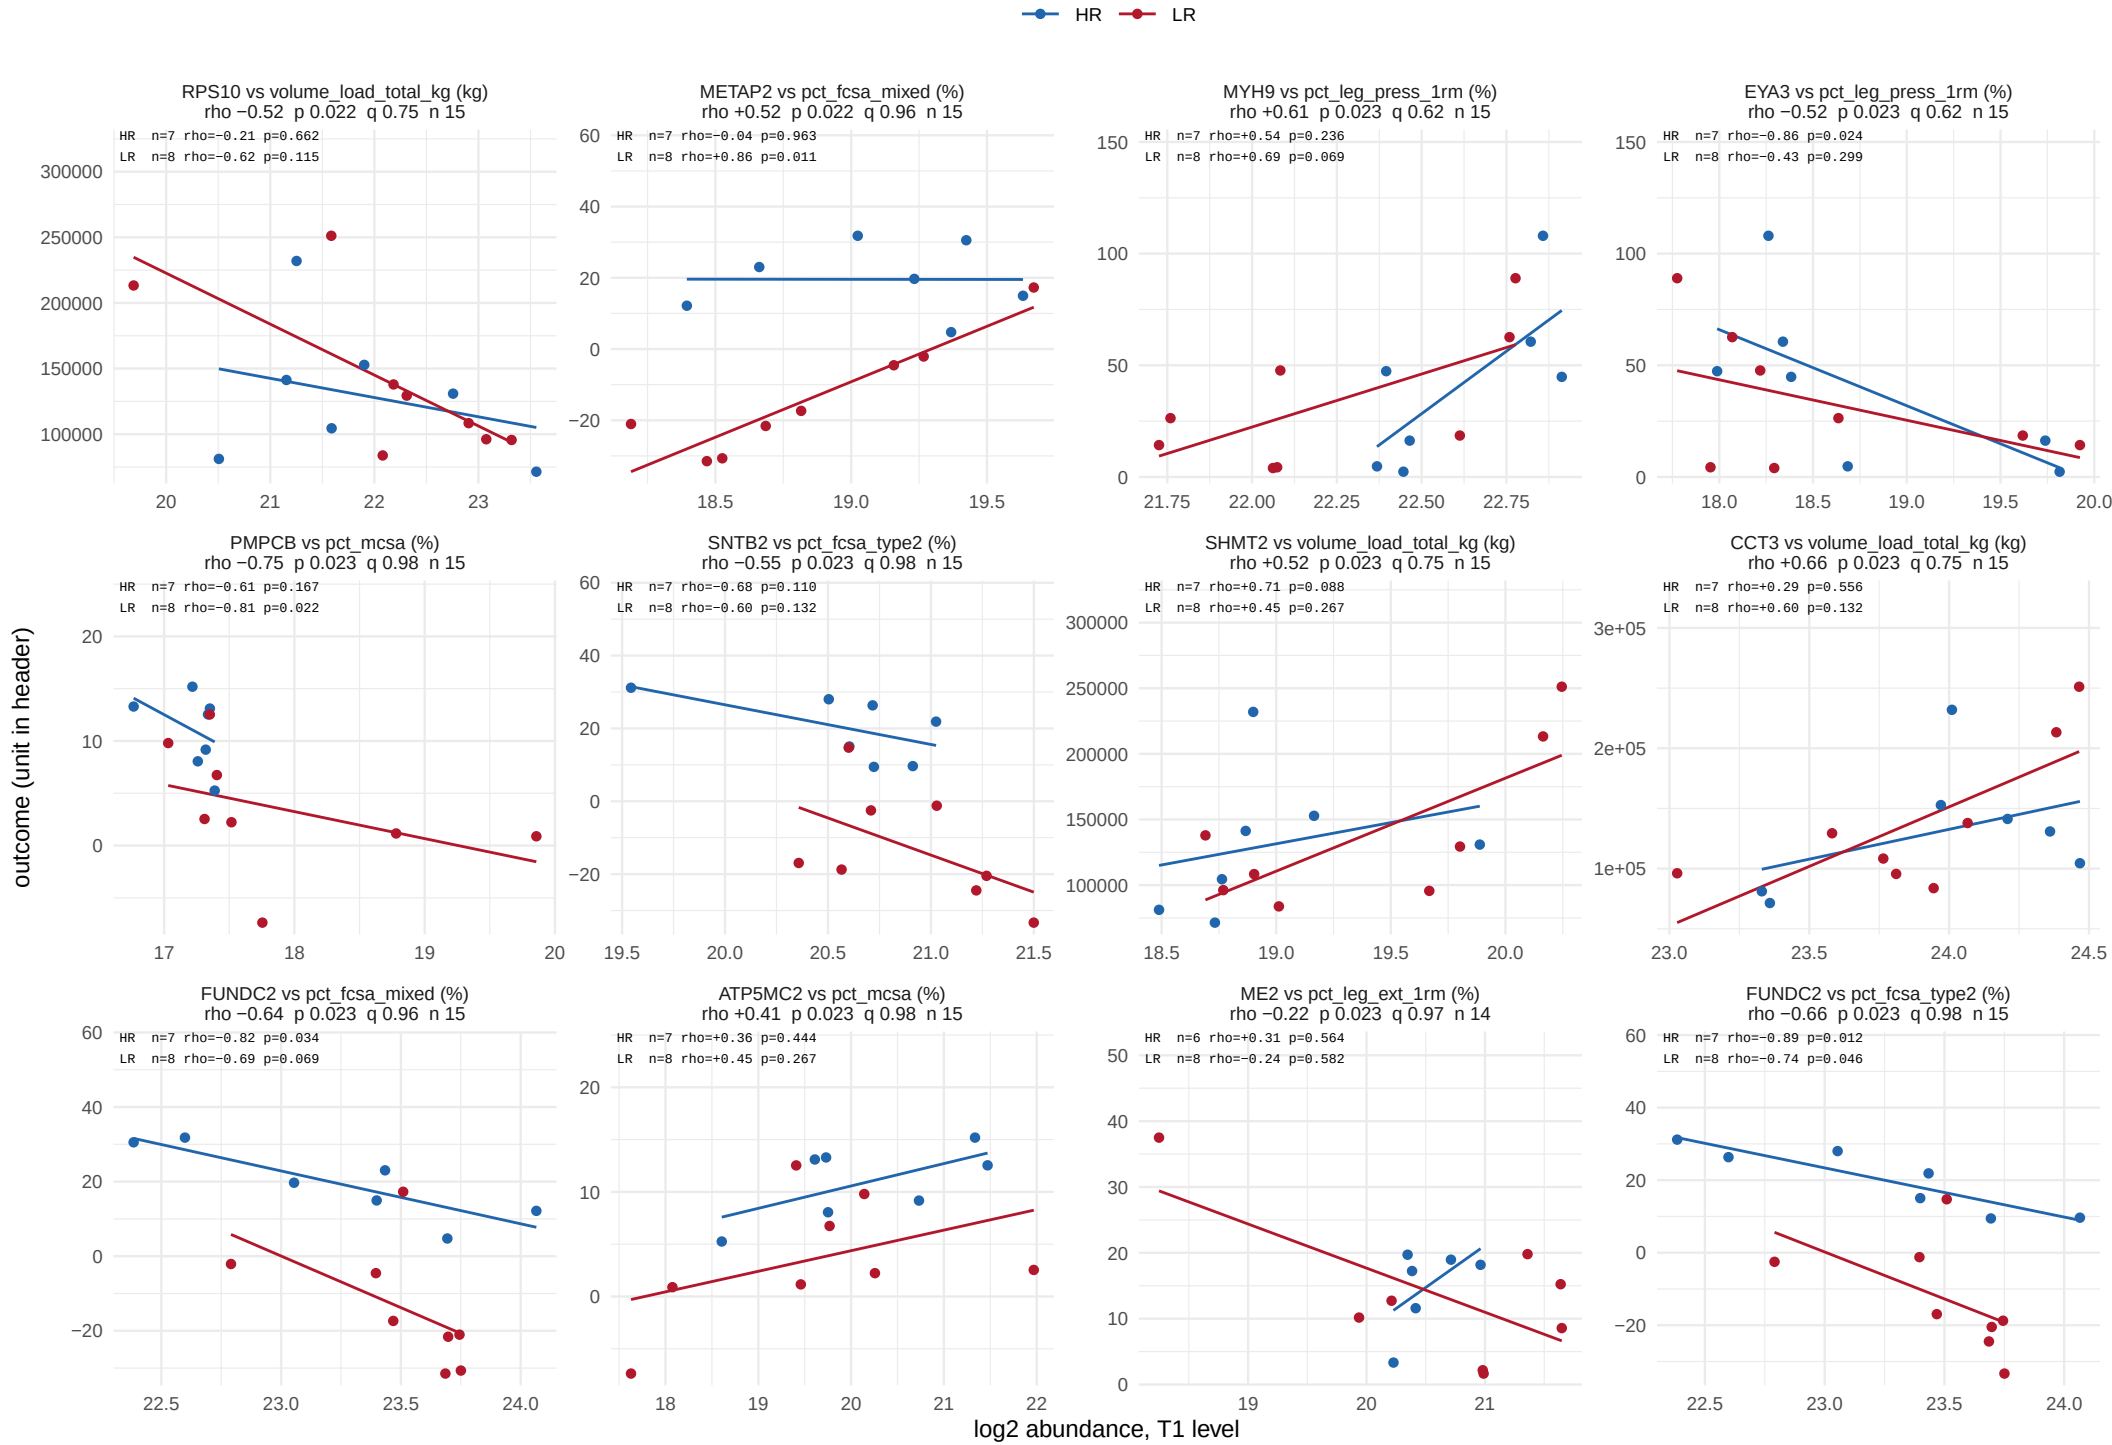

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


695 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 25 of 58.

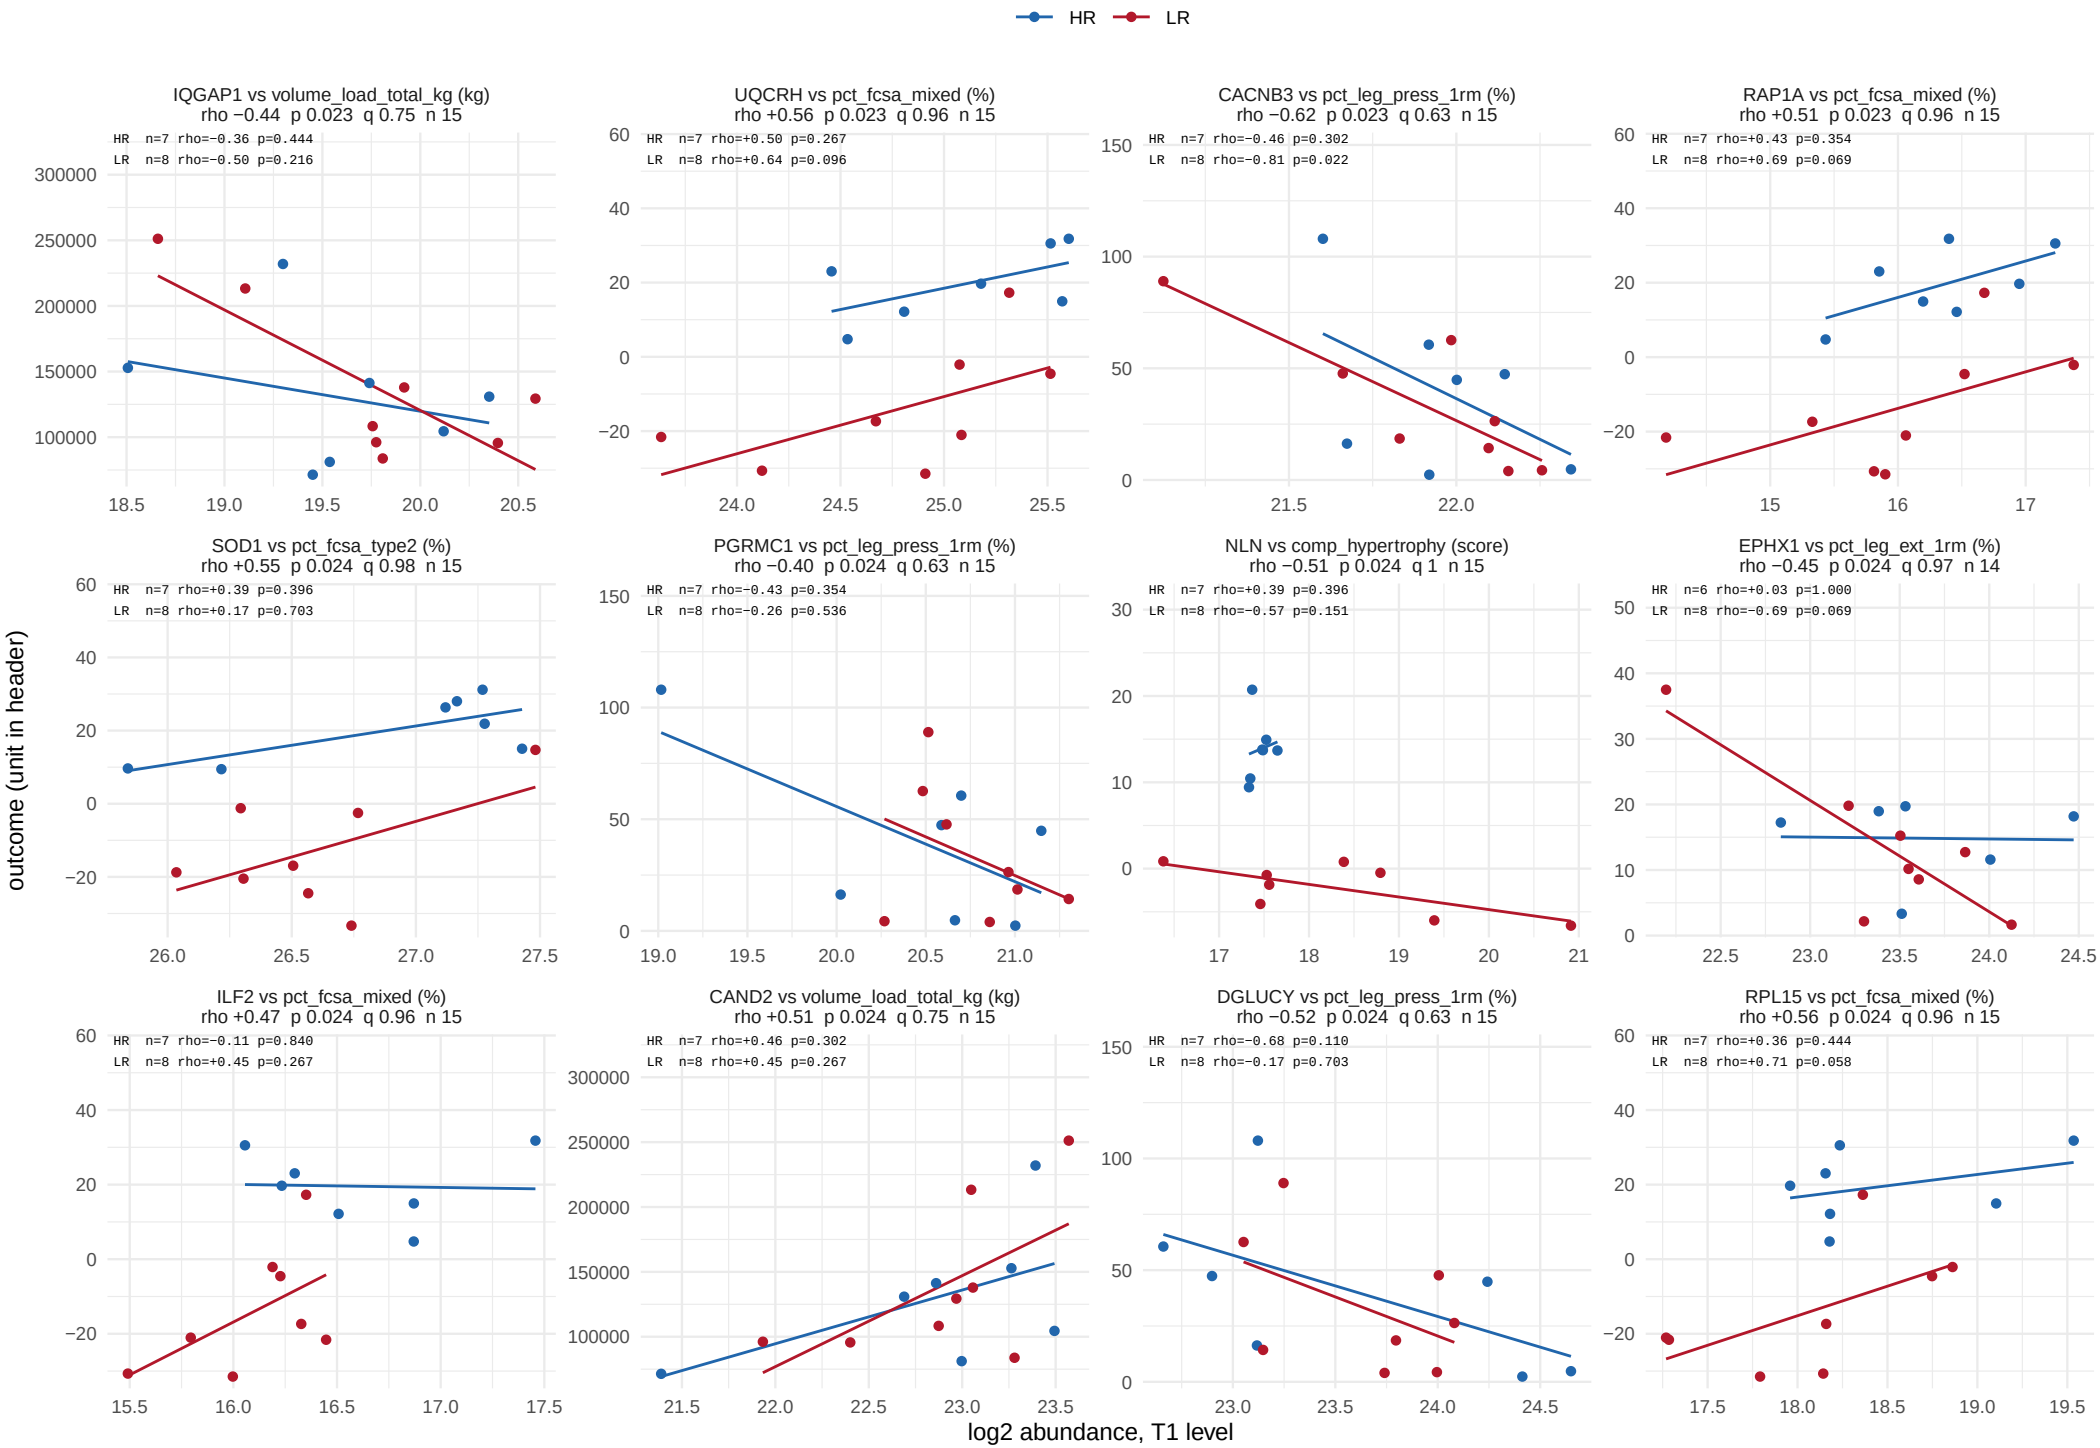

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


695 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 26 of 58.

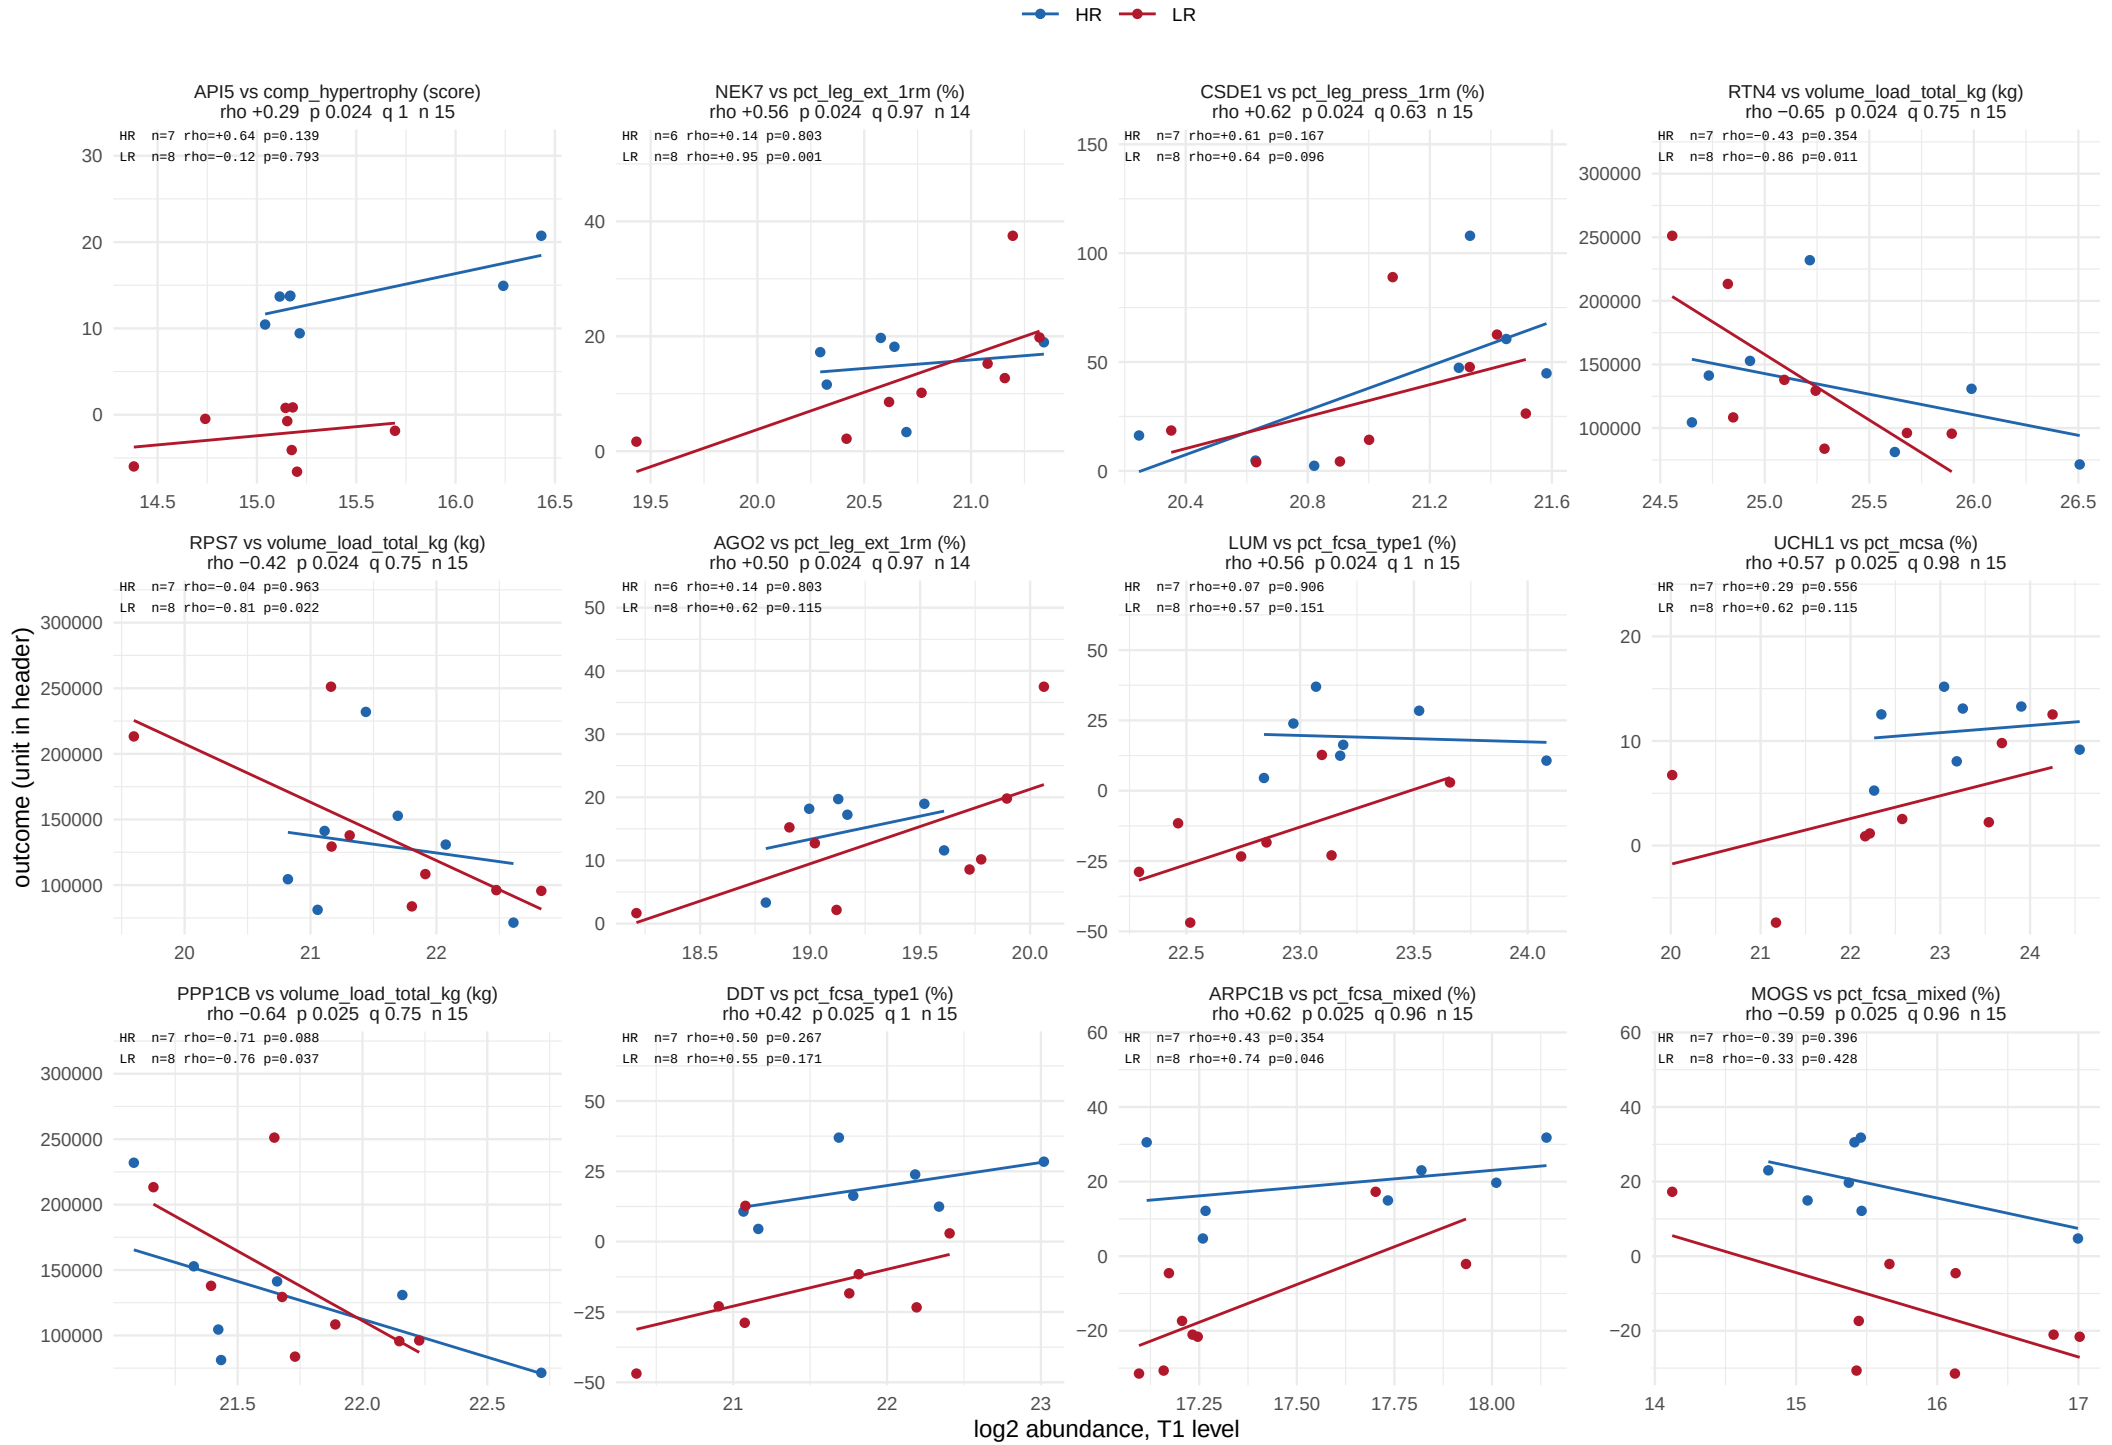

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


695 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 27 of 58.

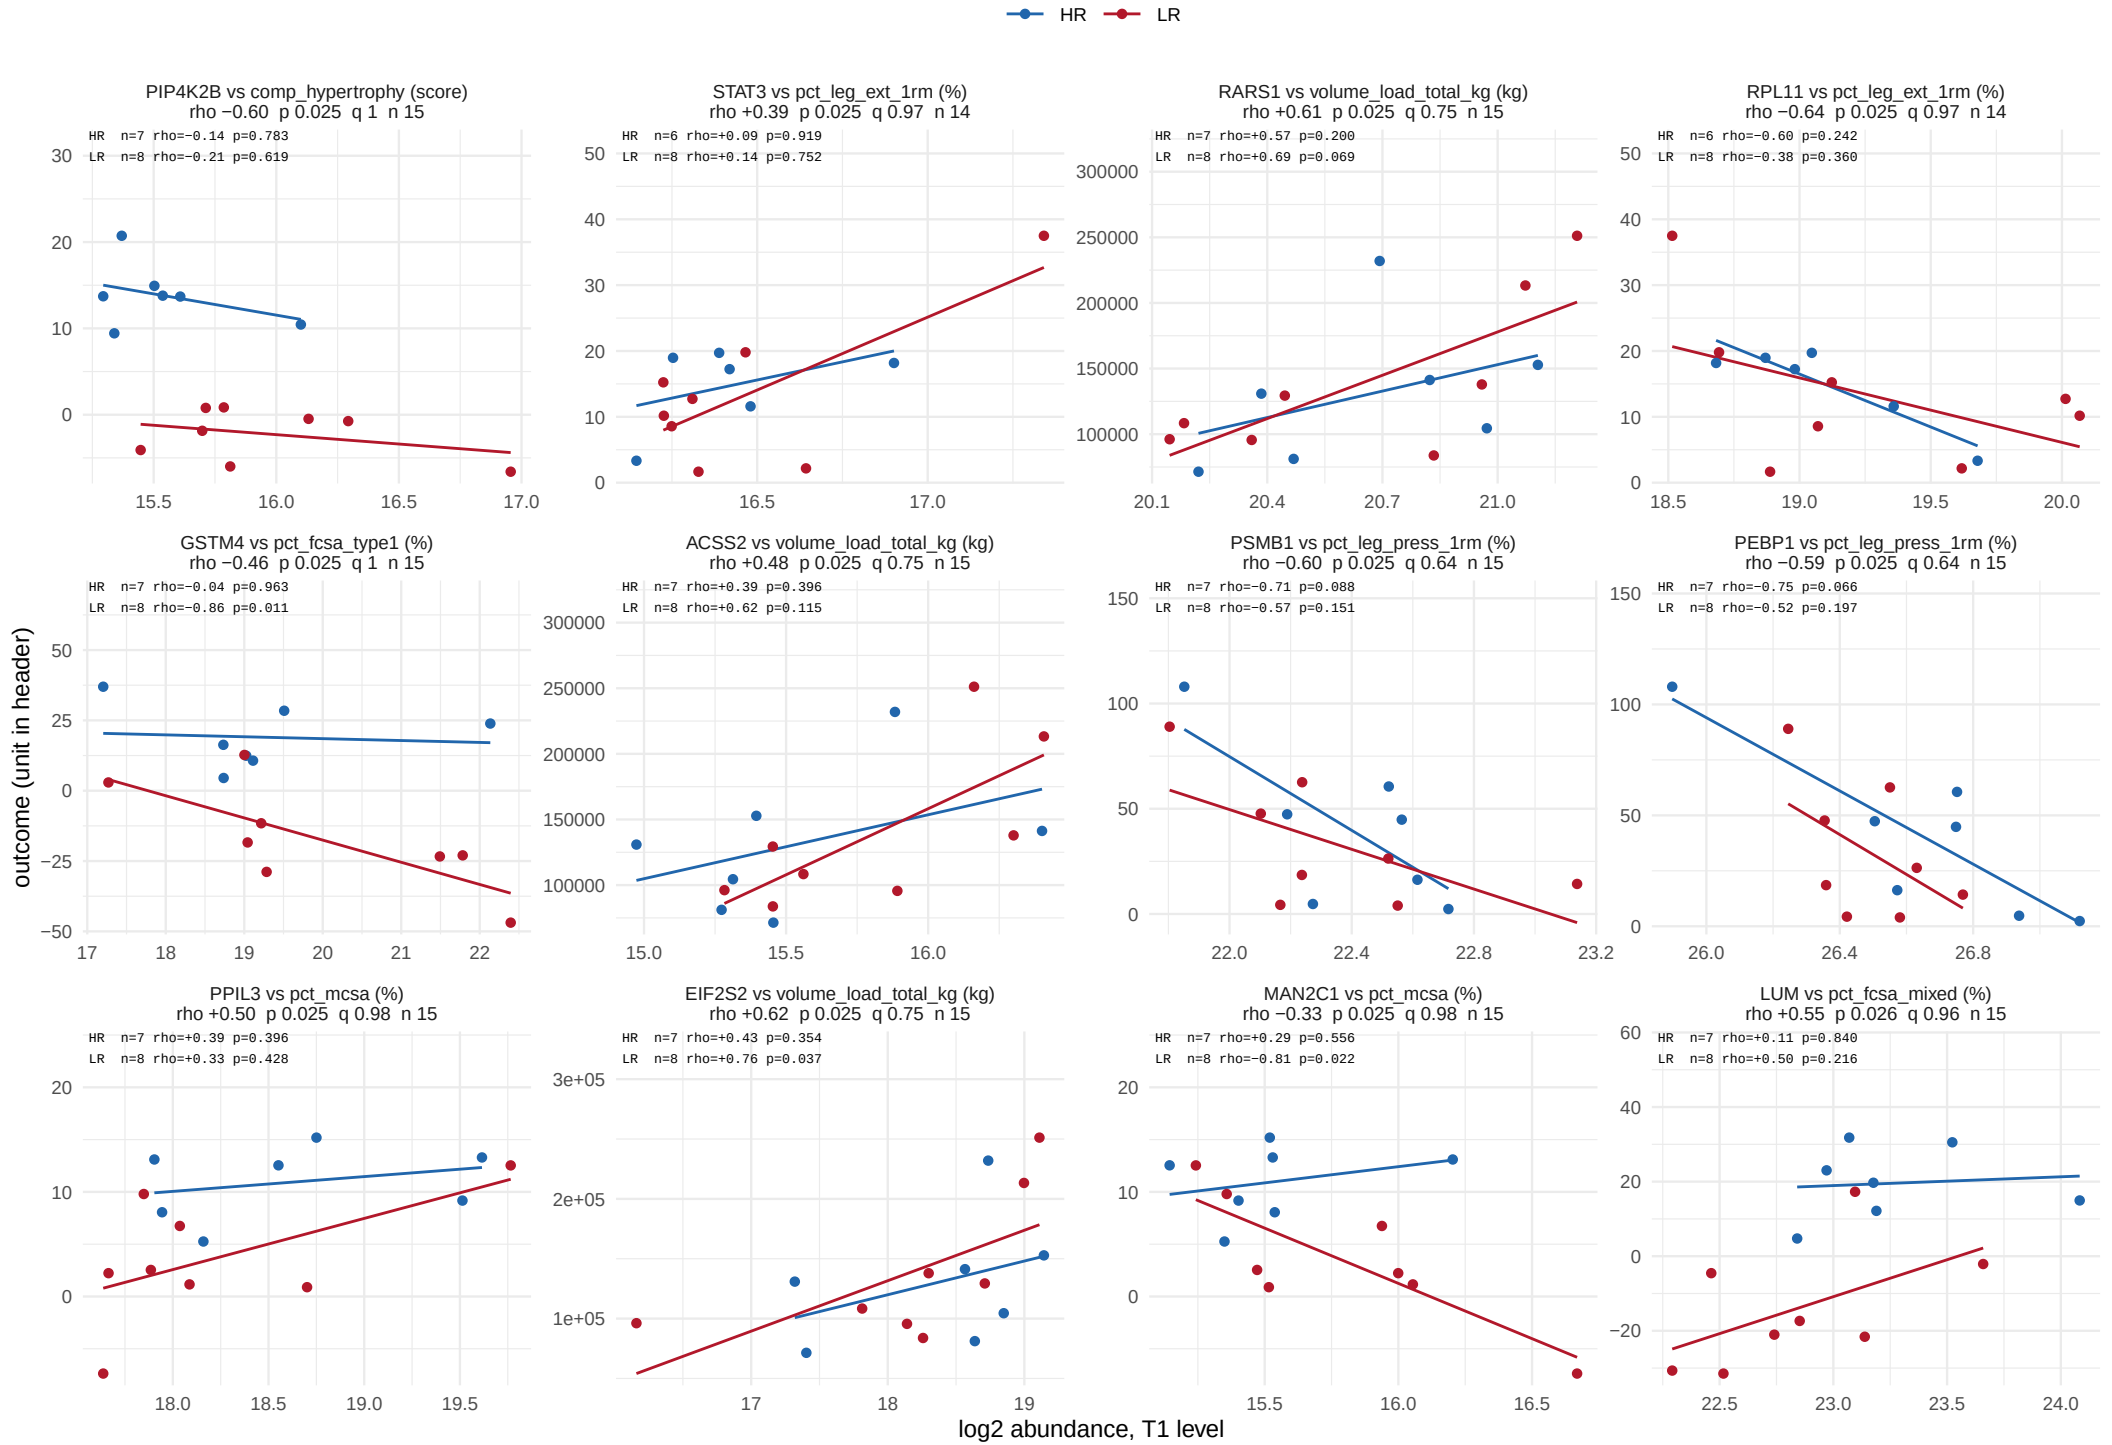

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


695 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 28 of 58.

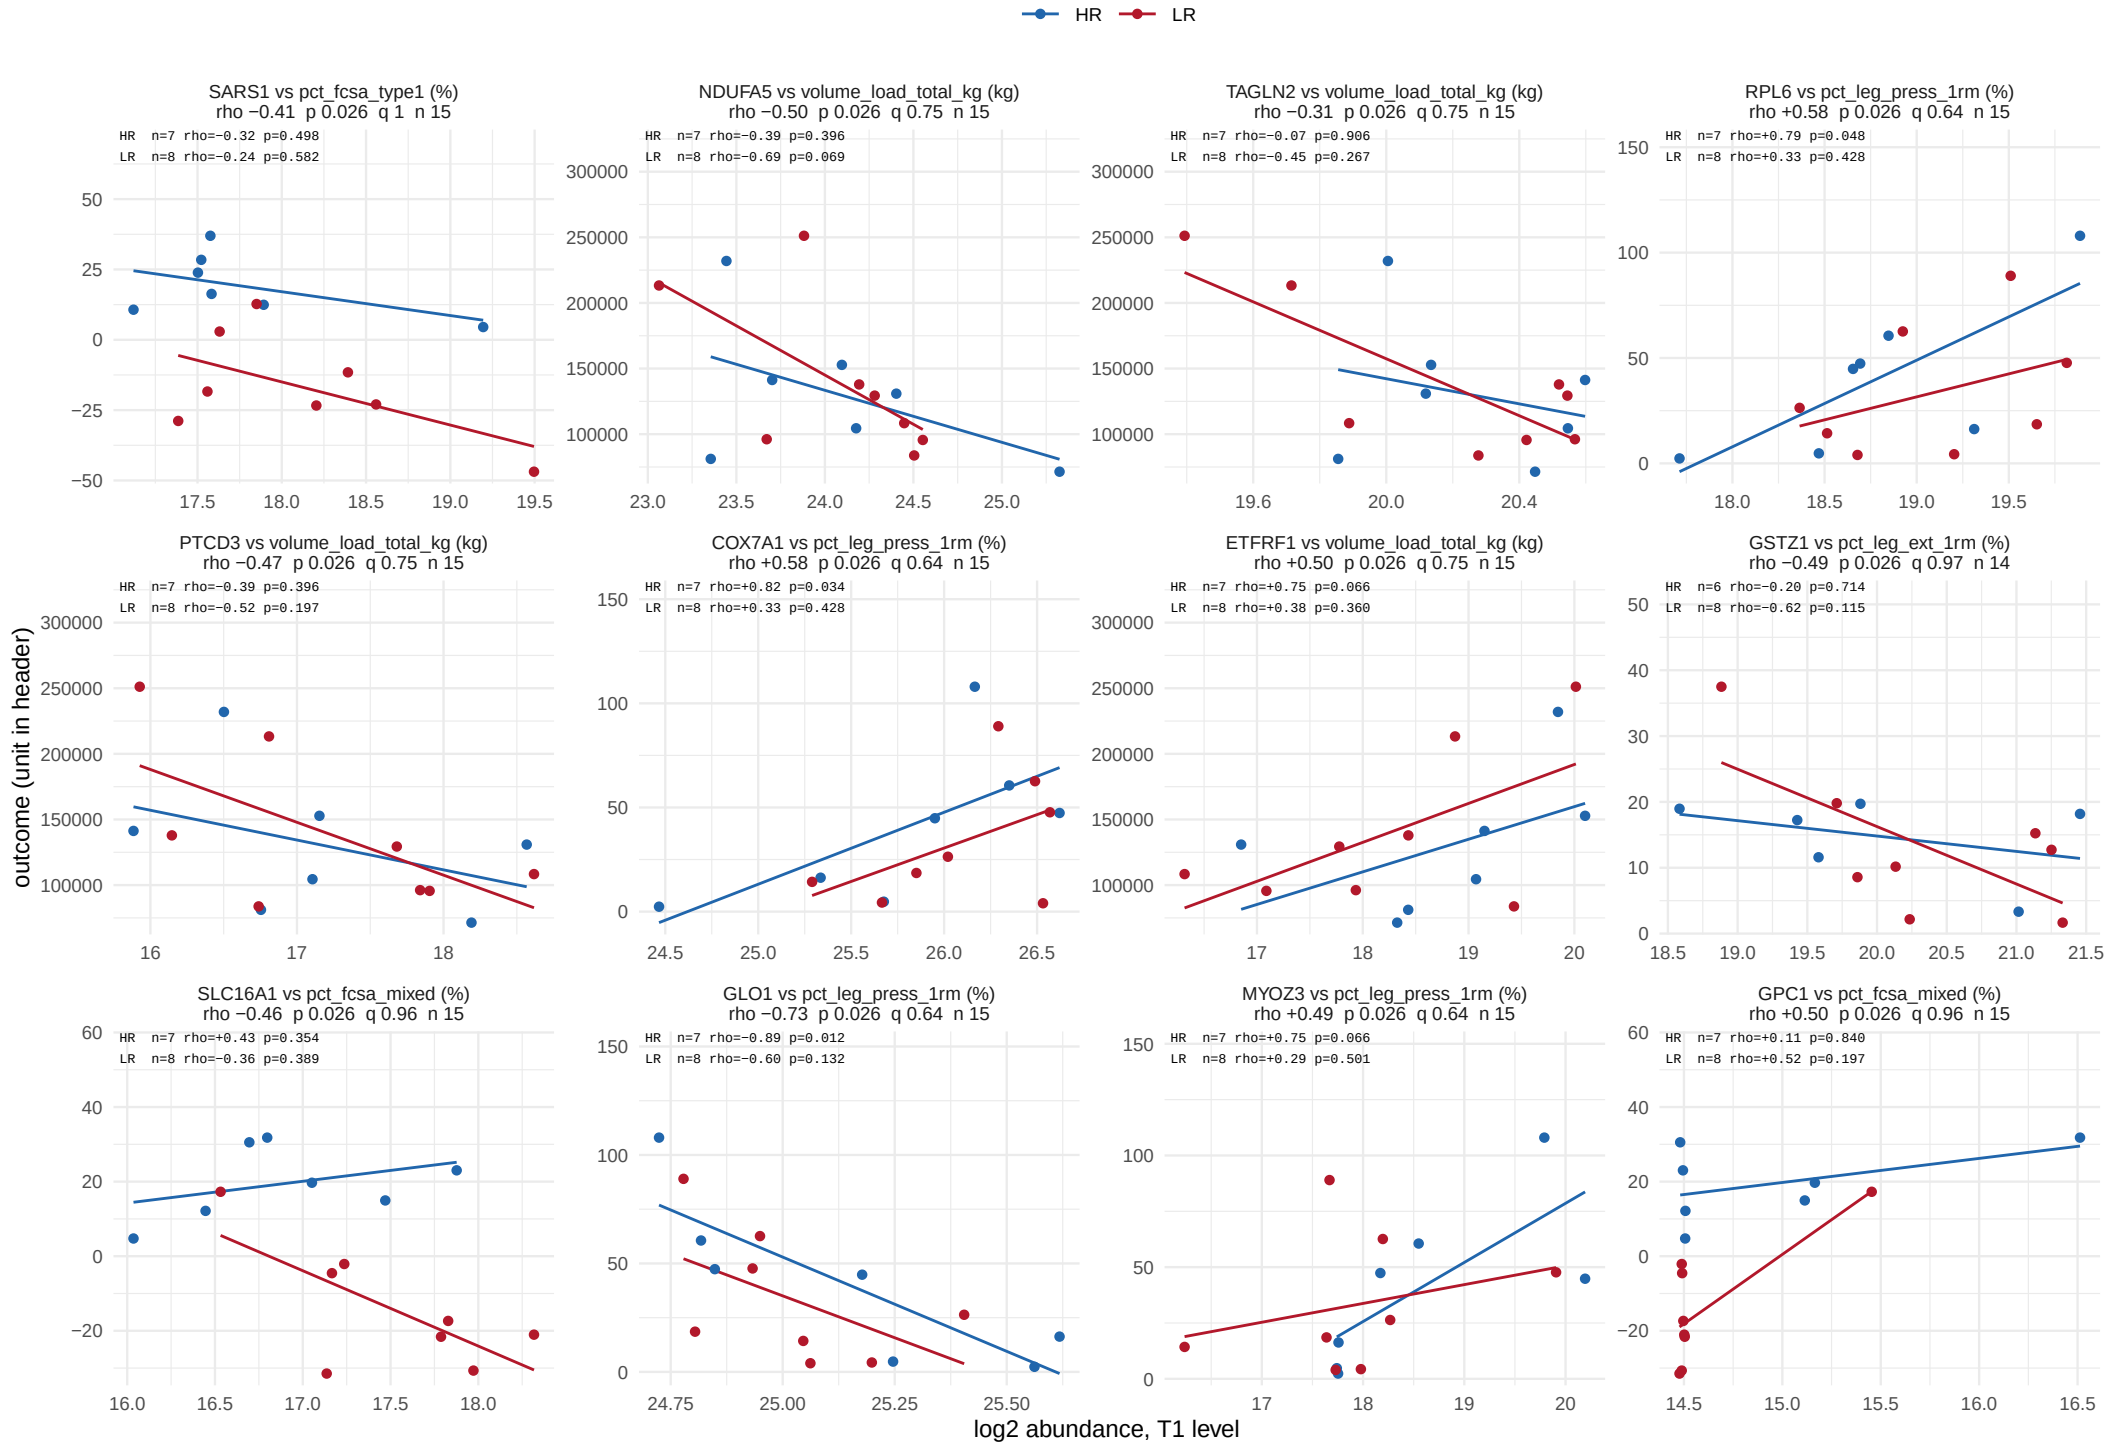

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


695 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 29 of 58.

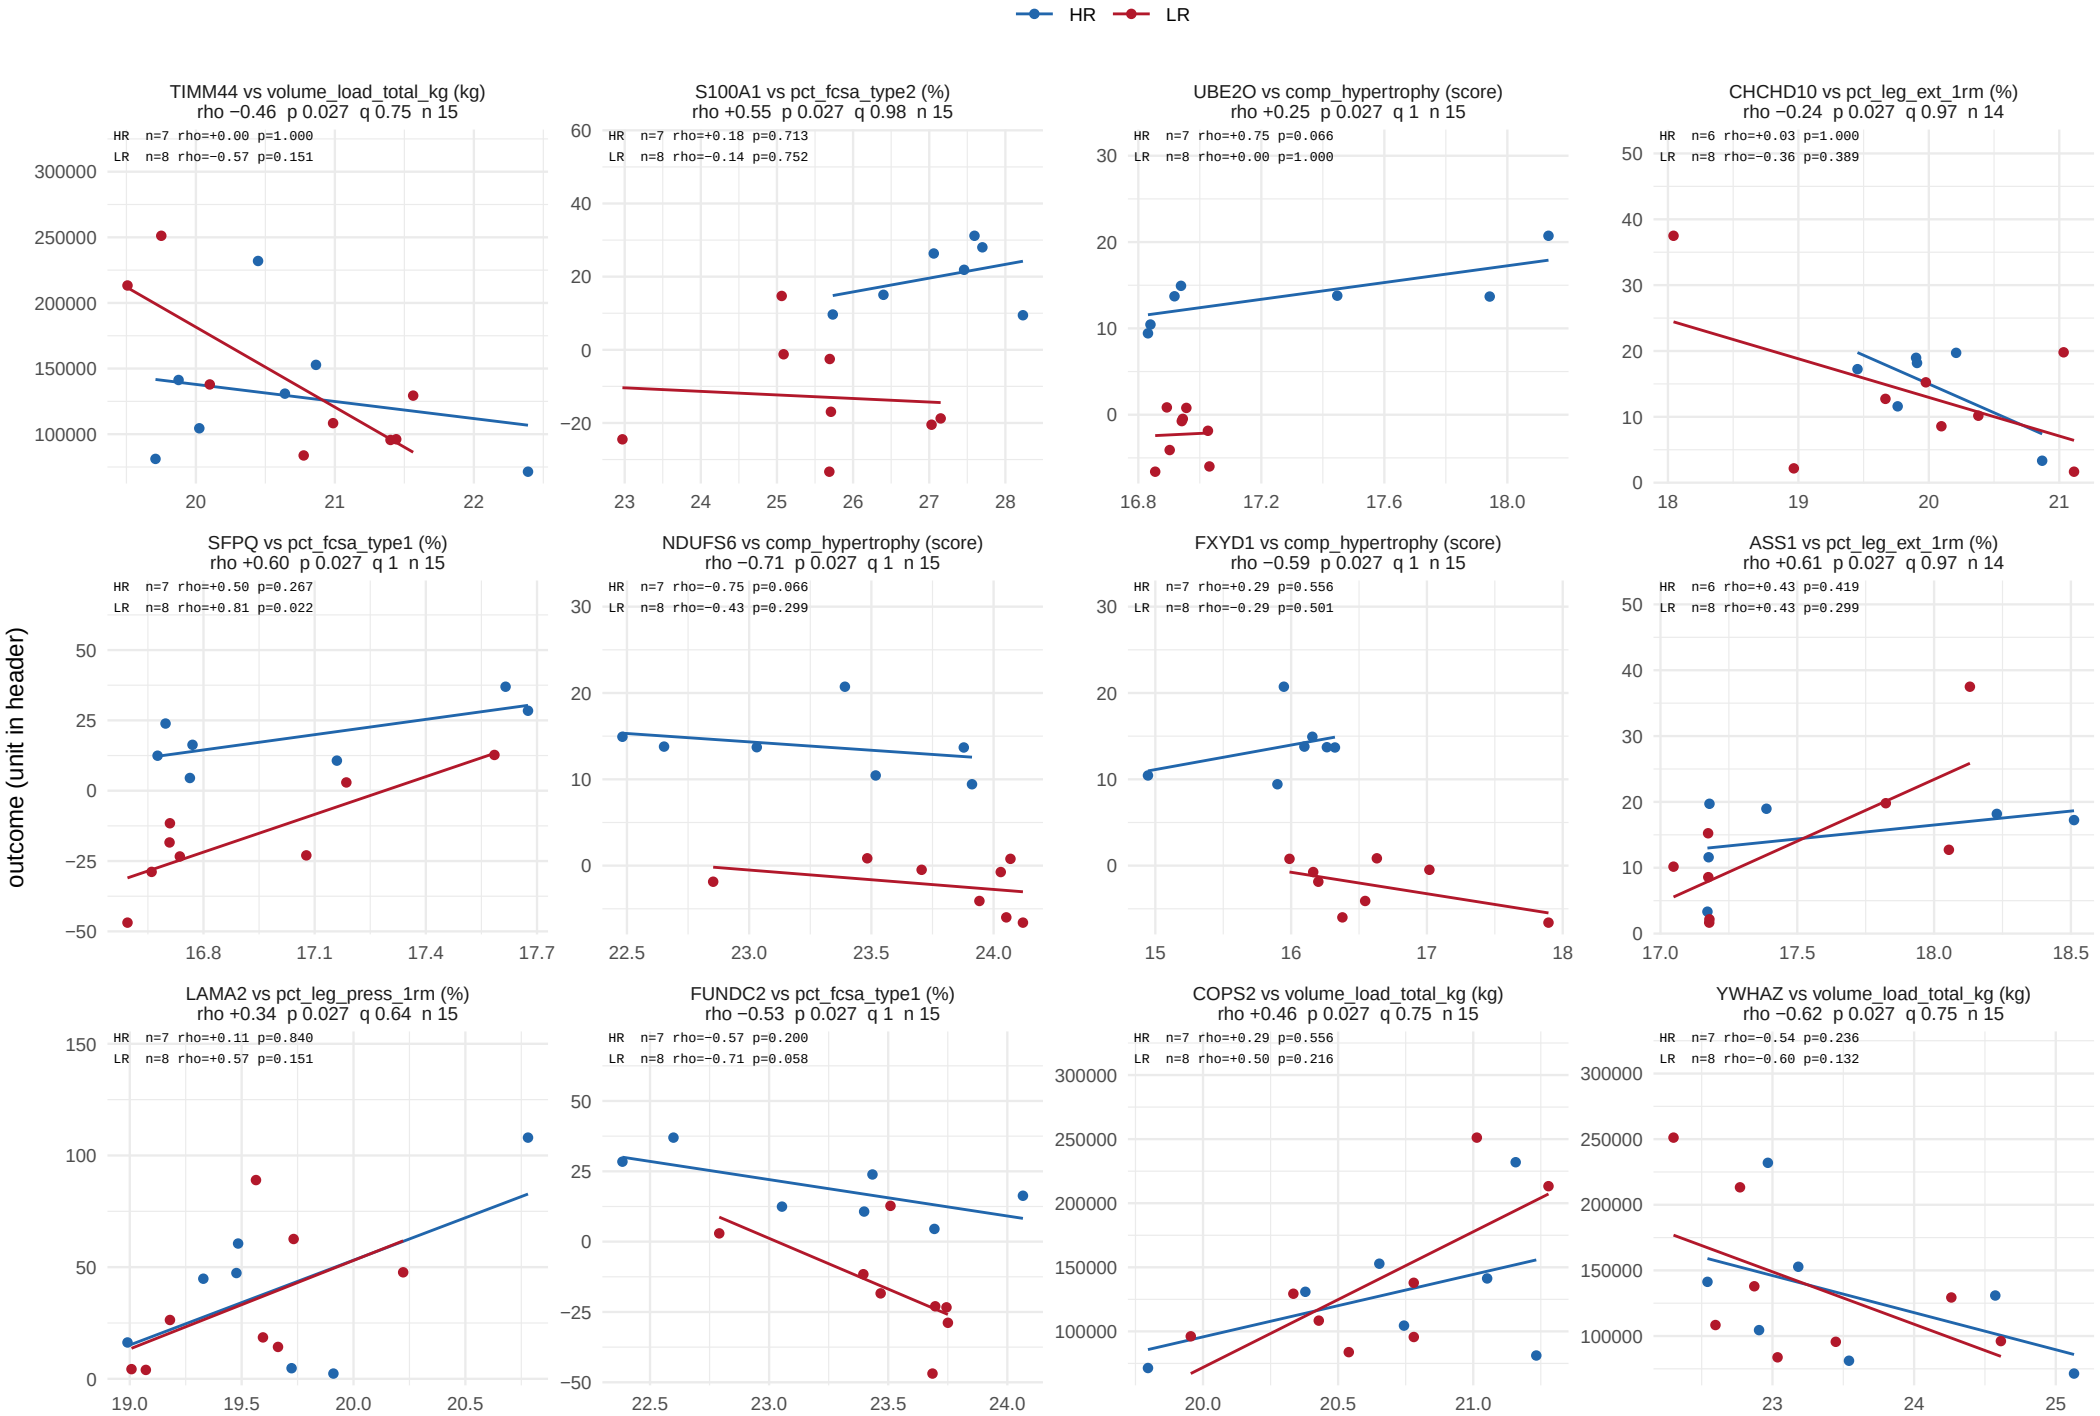

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


695 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 30 of 58.

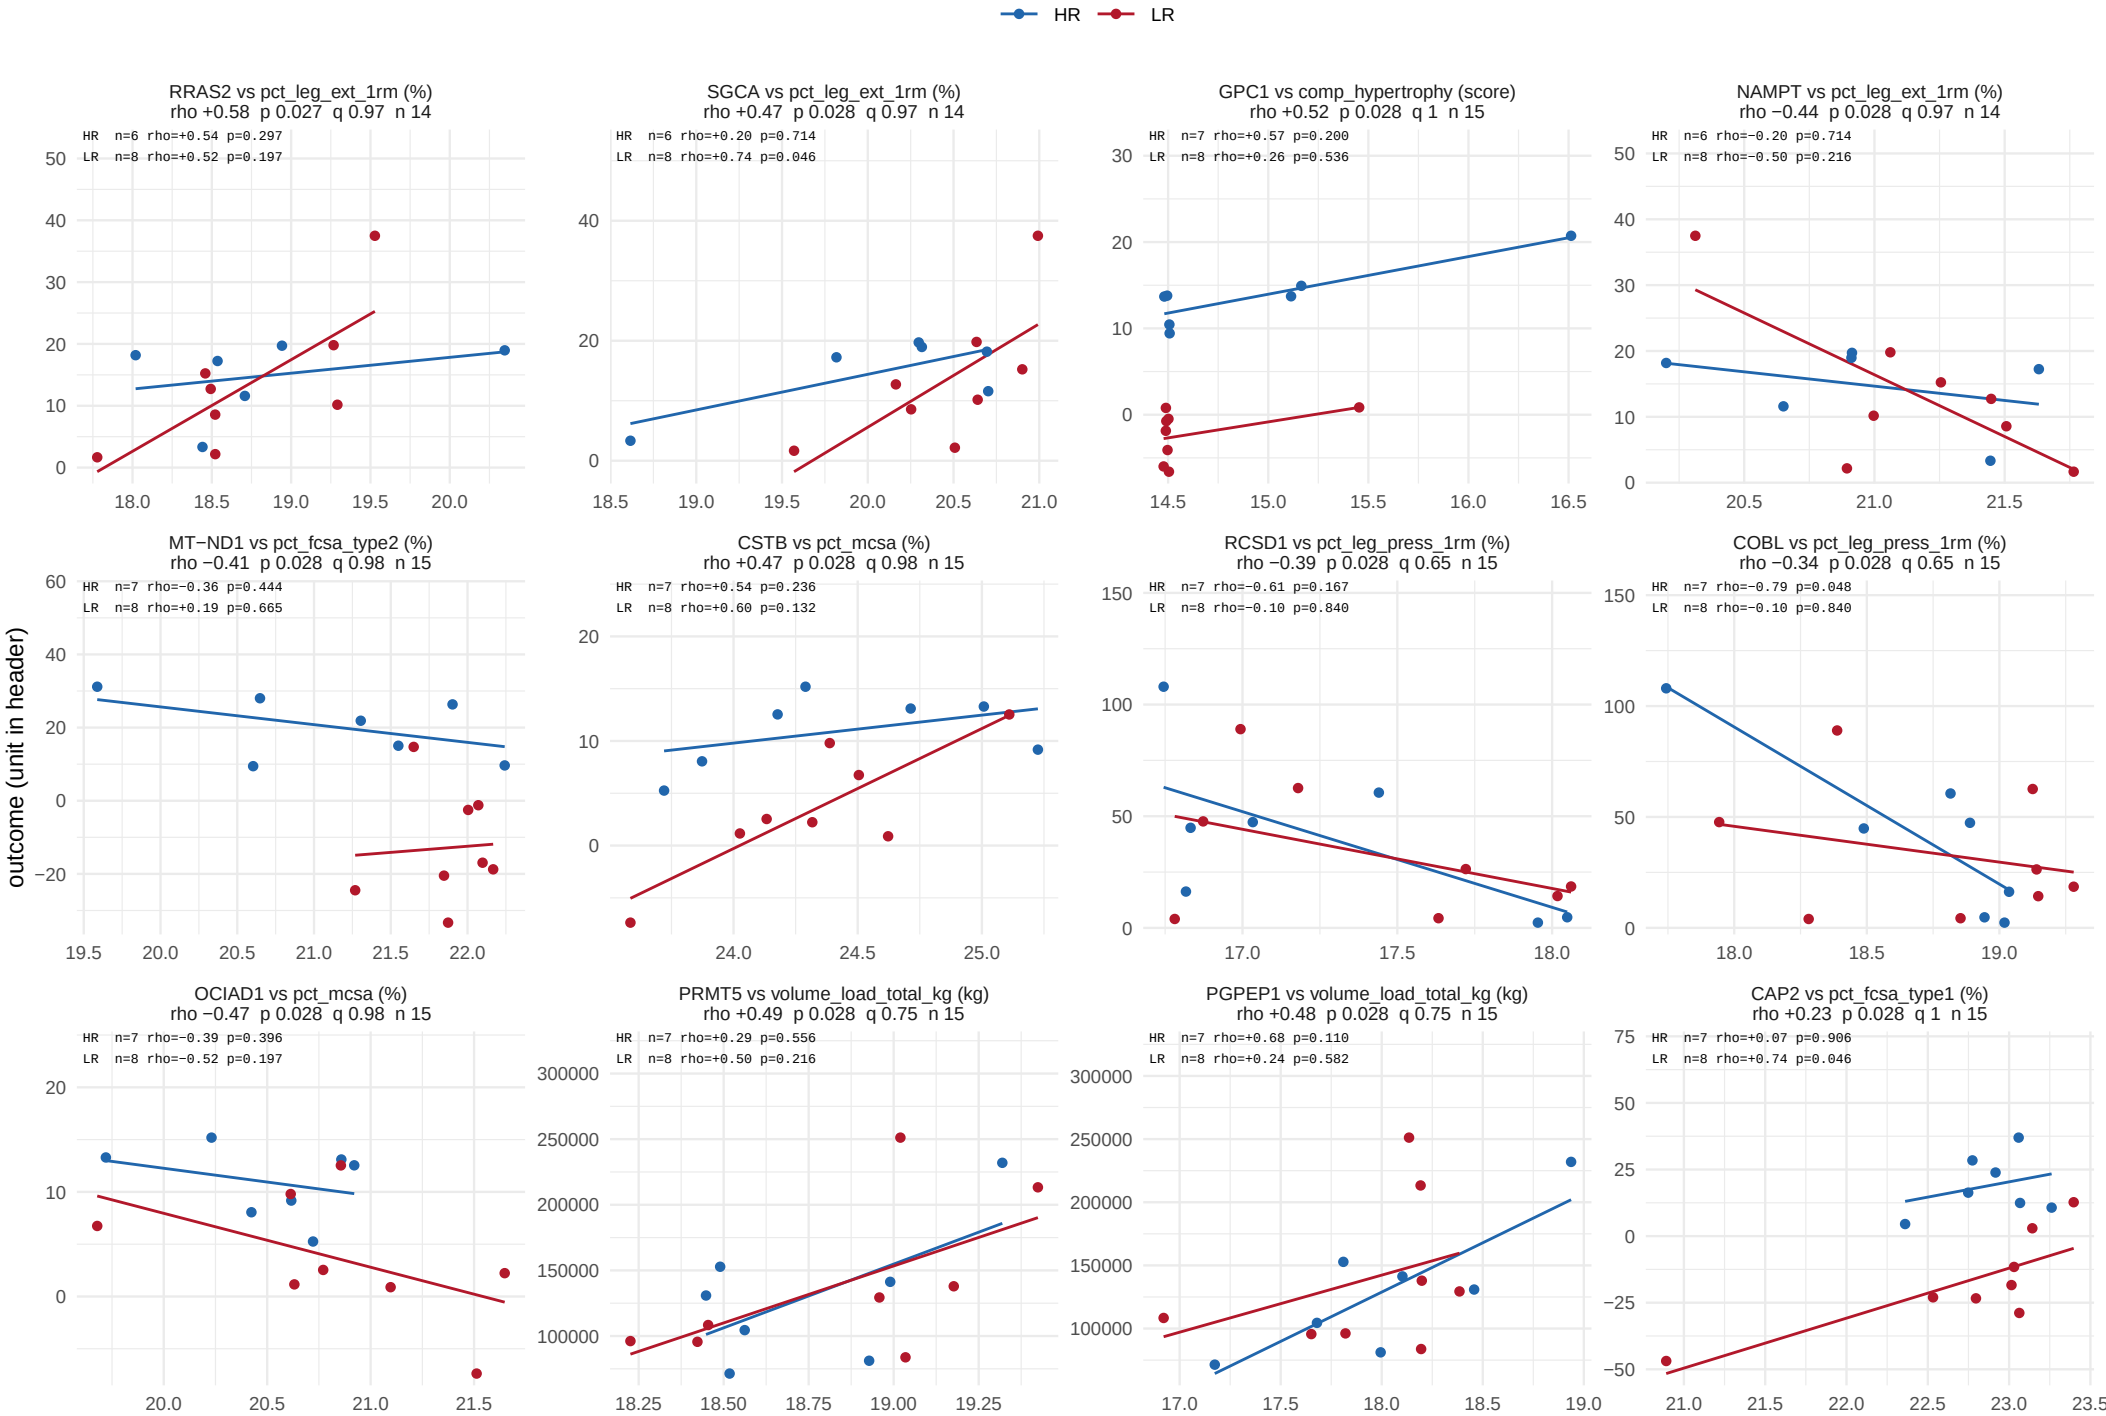

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


695 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 31 of 58.

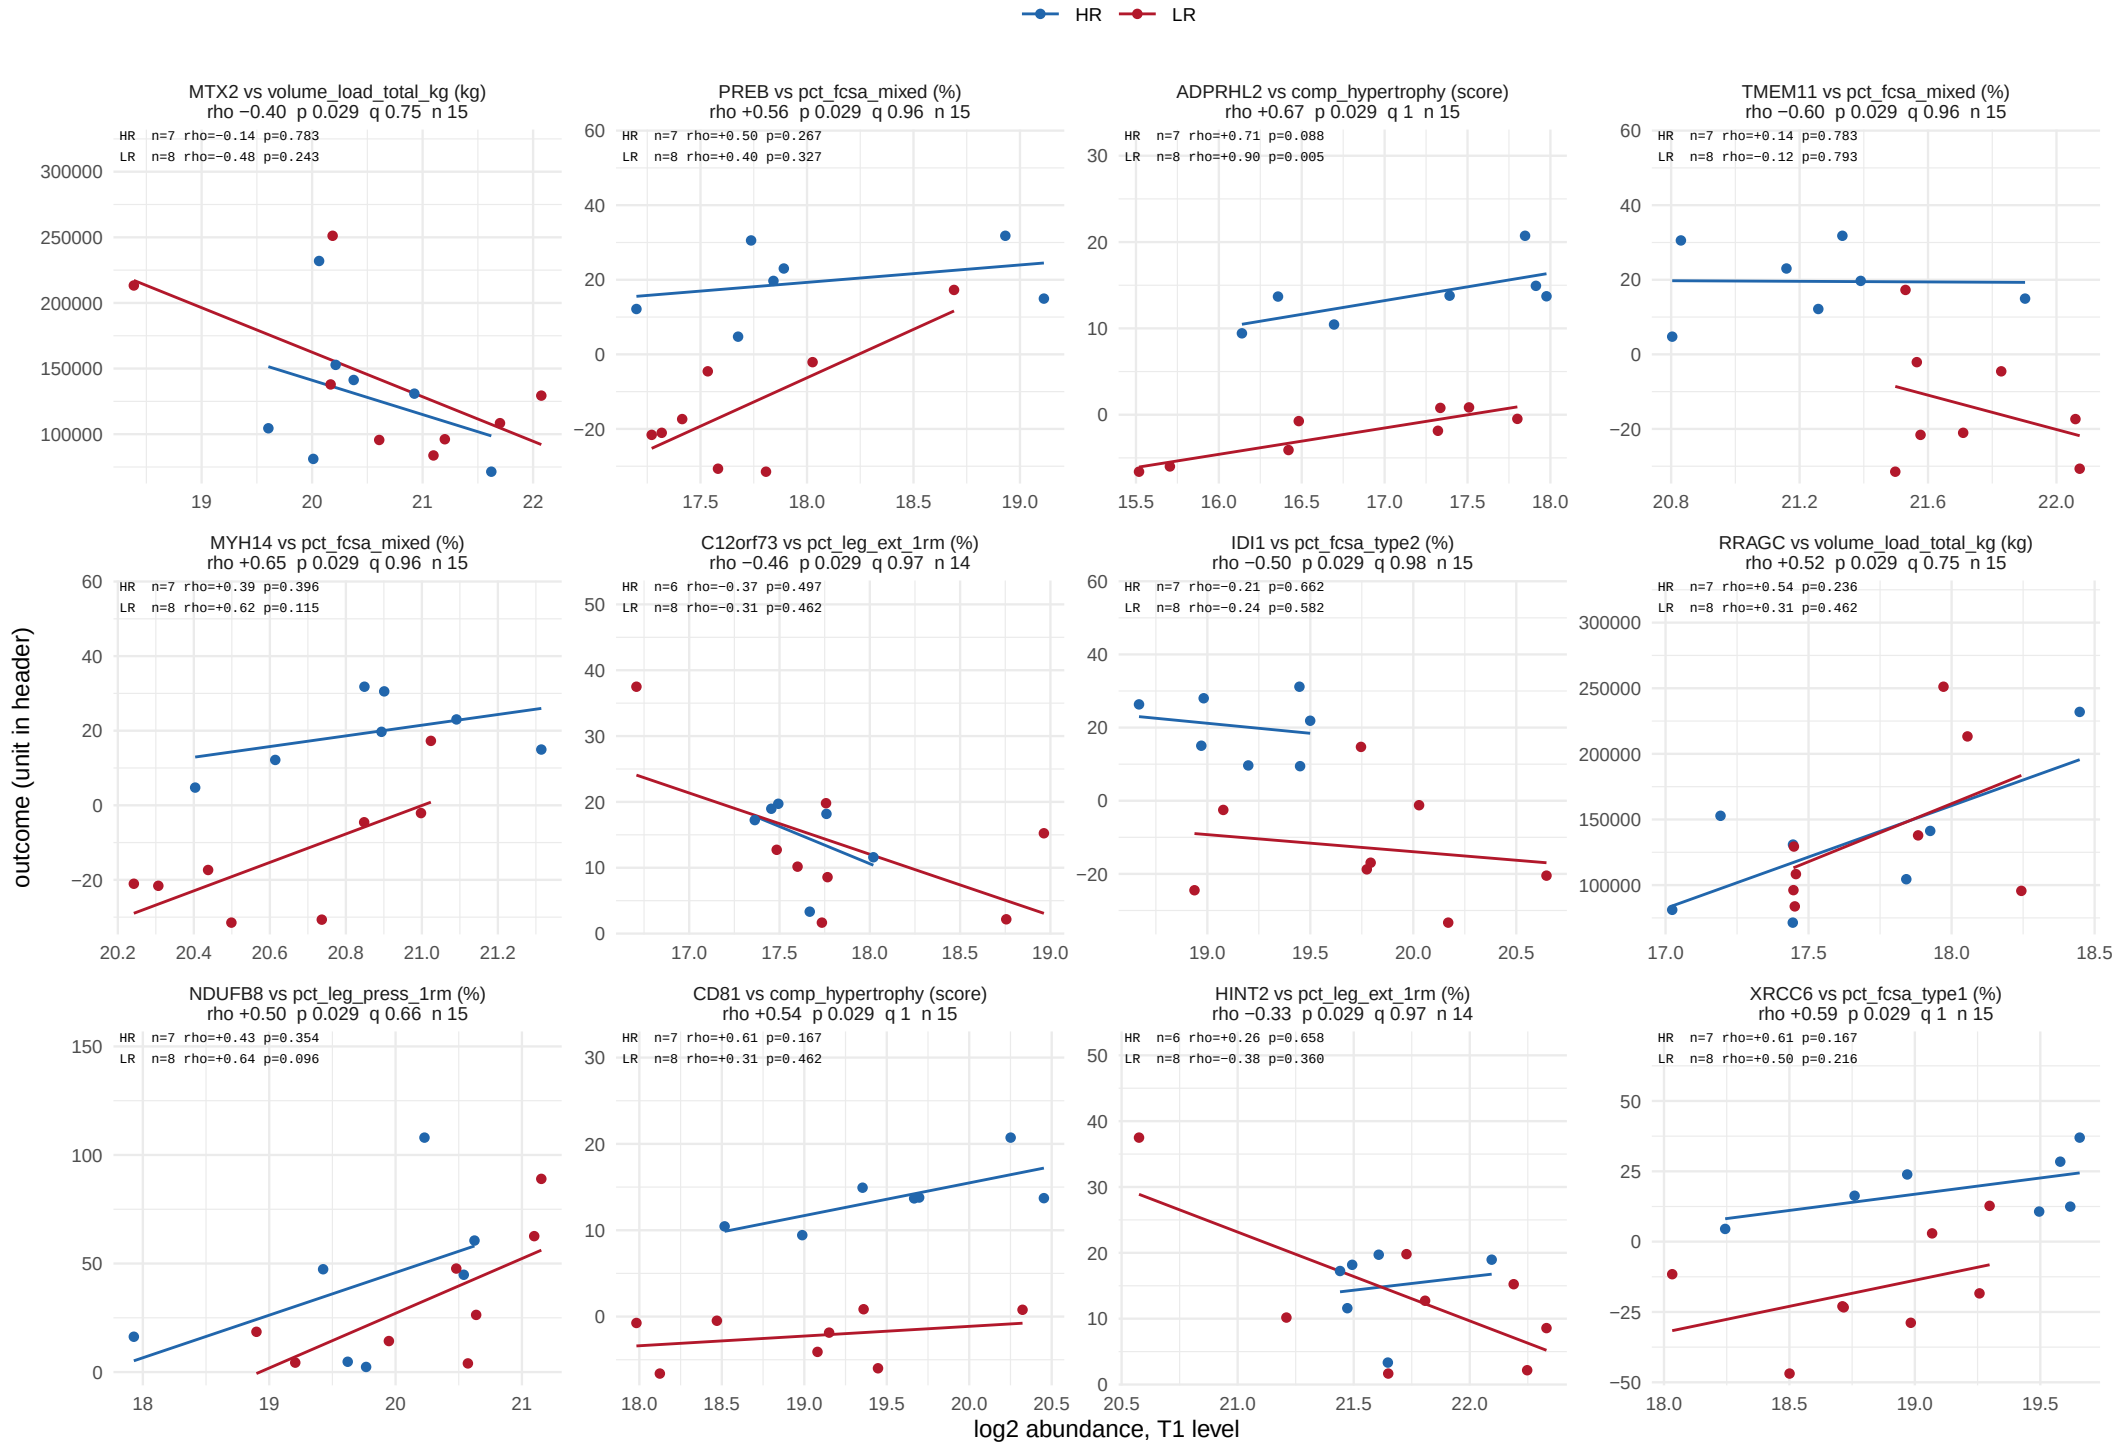

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


695 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 32 of 58.

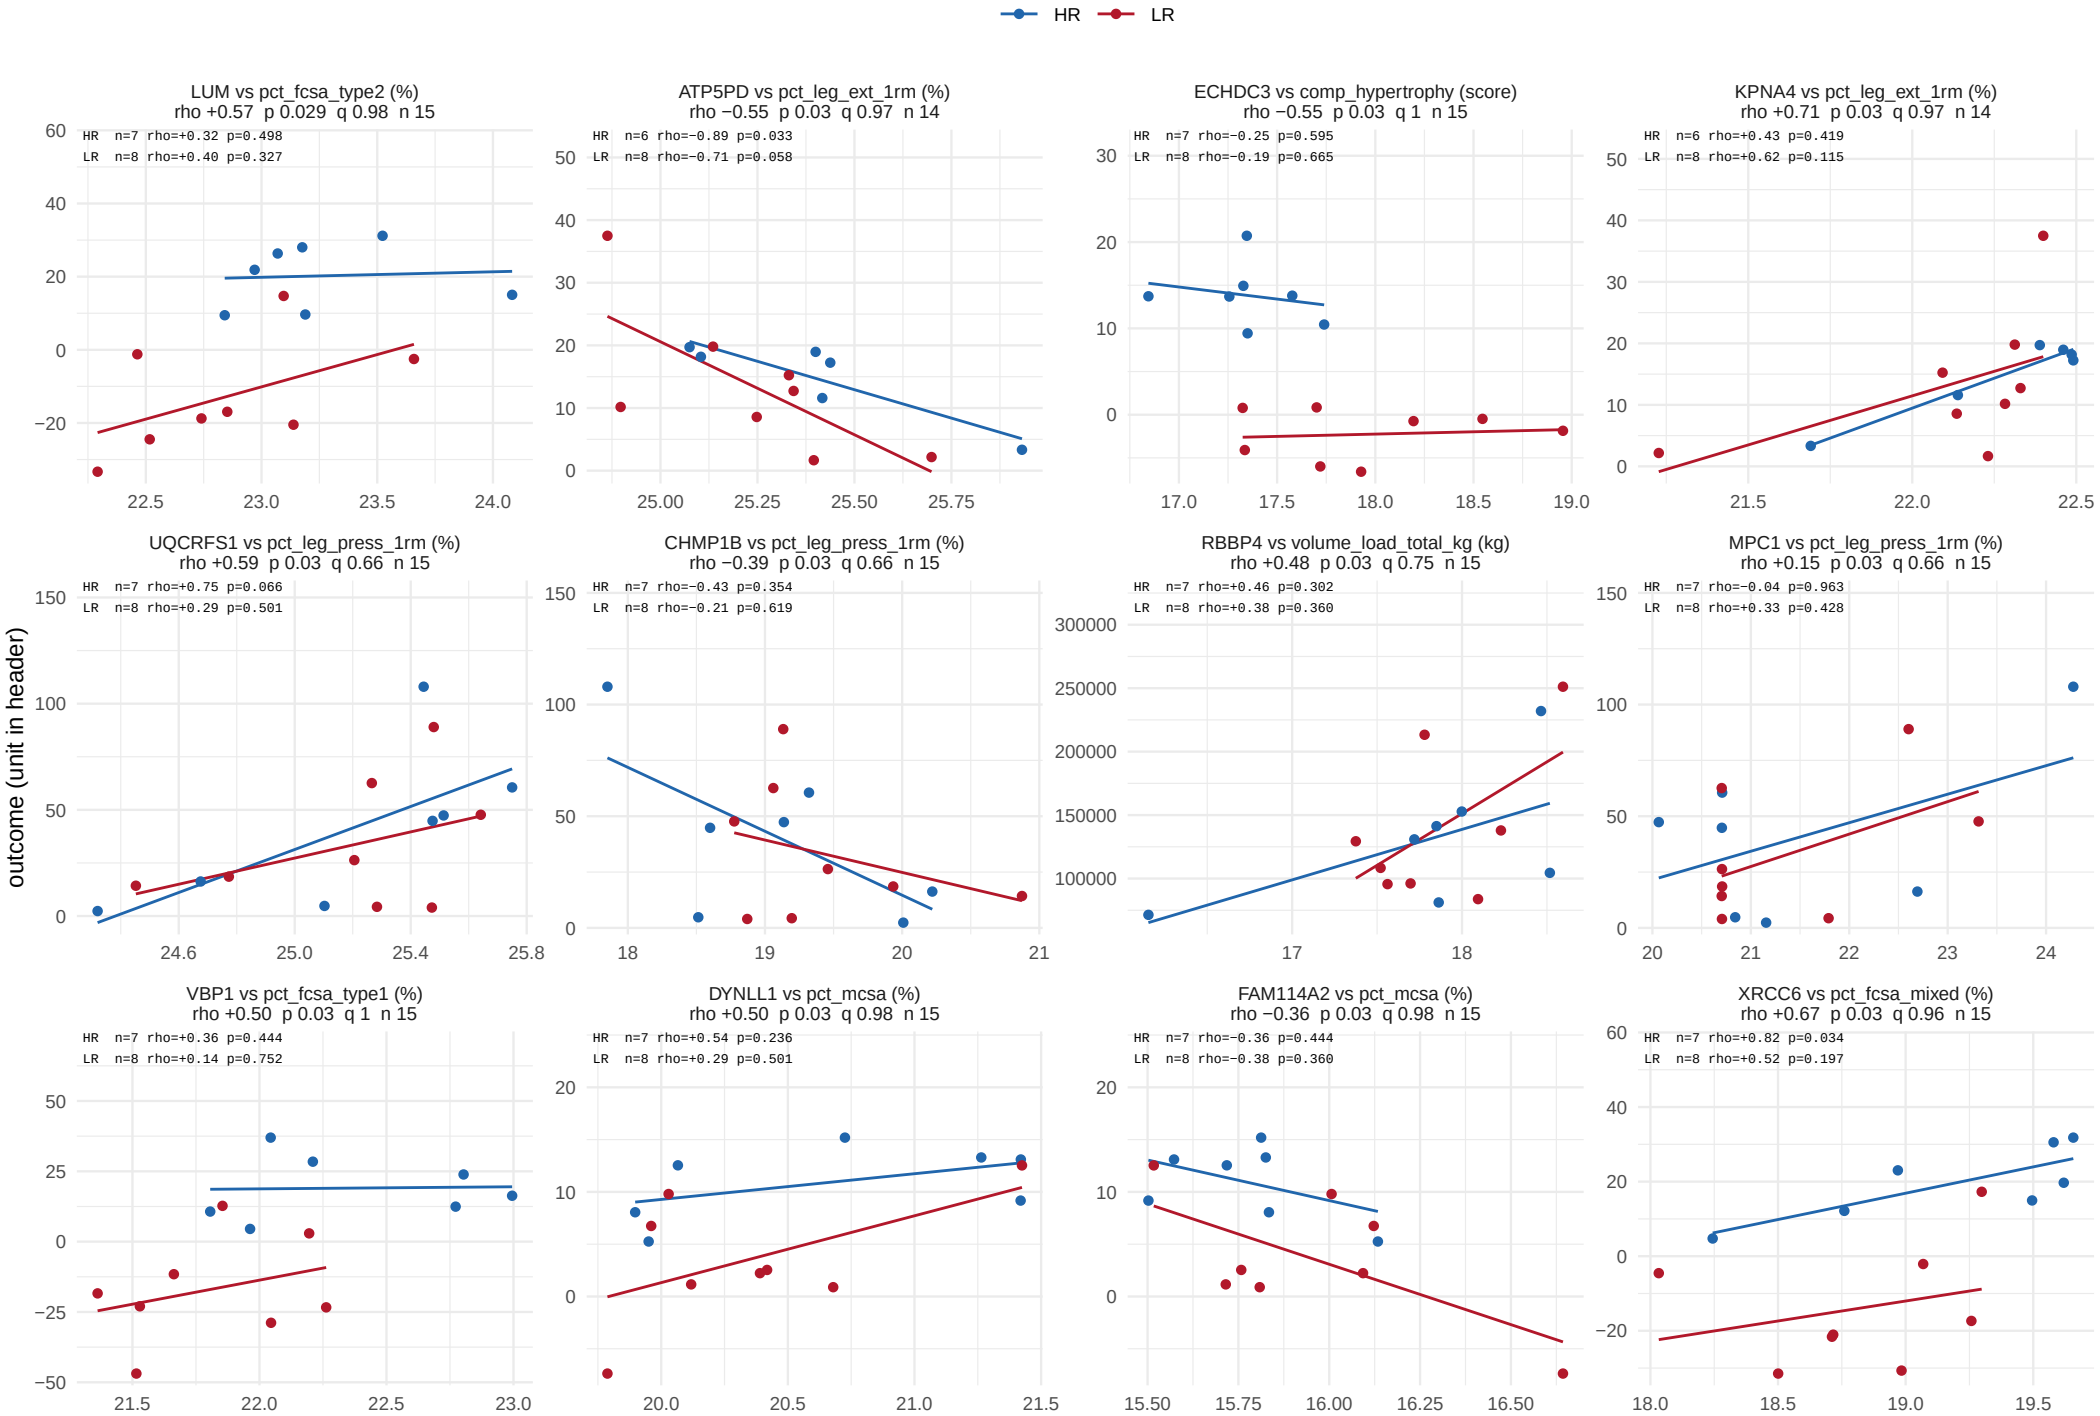

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


695 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 33 of 58.

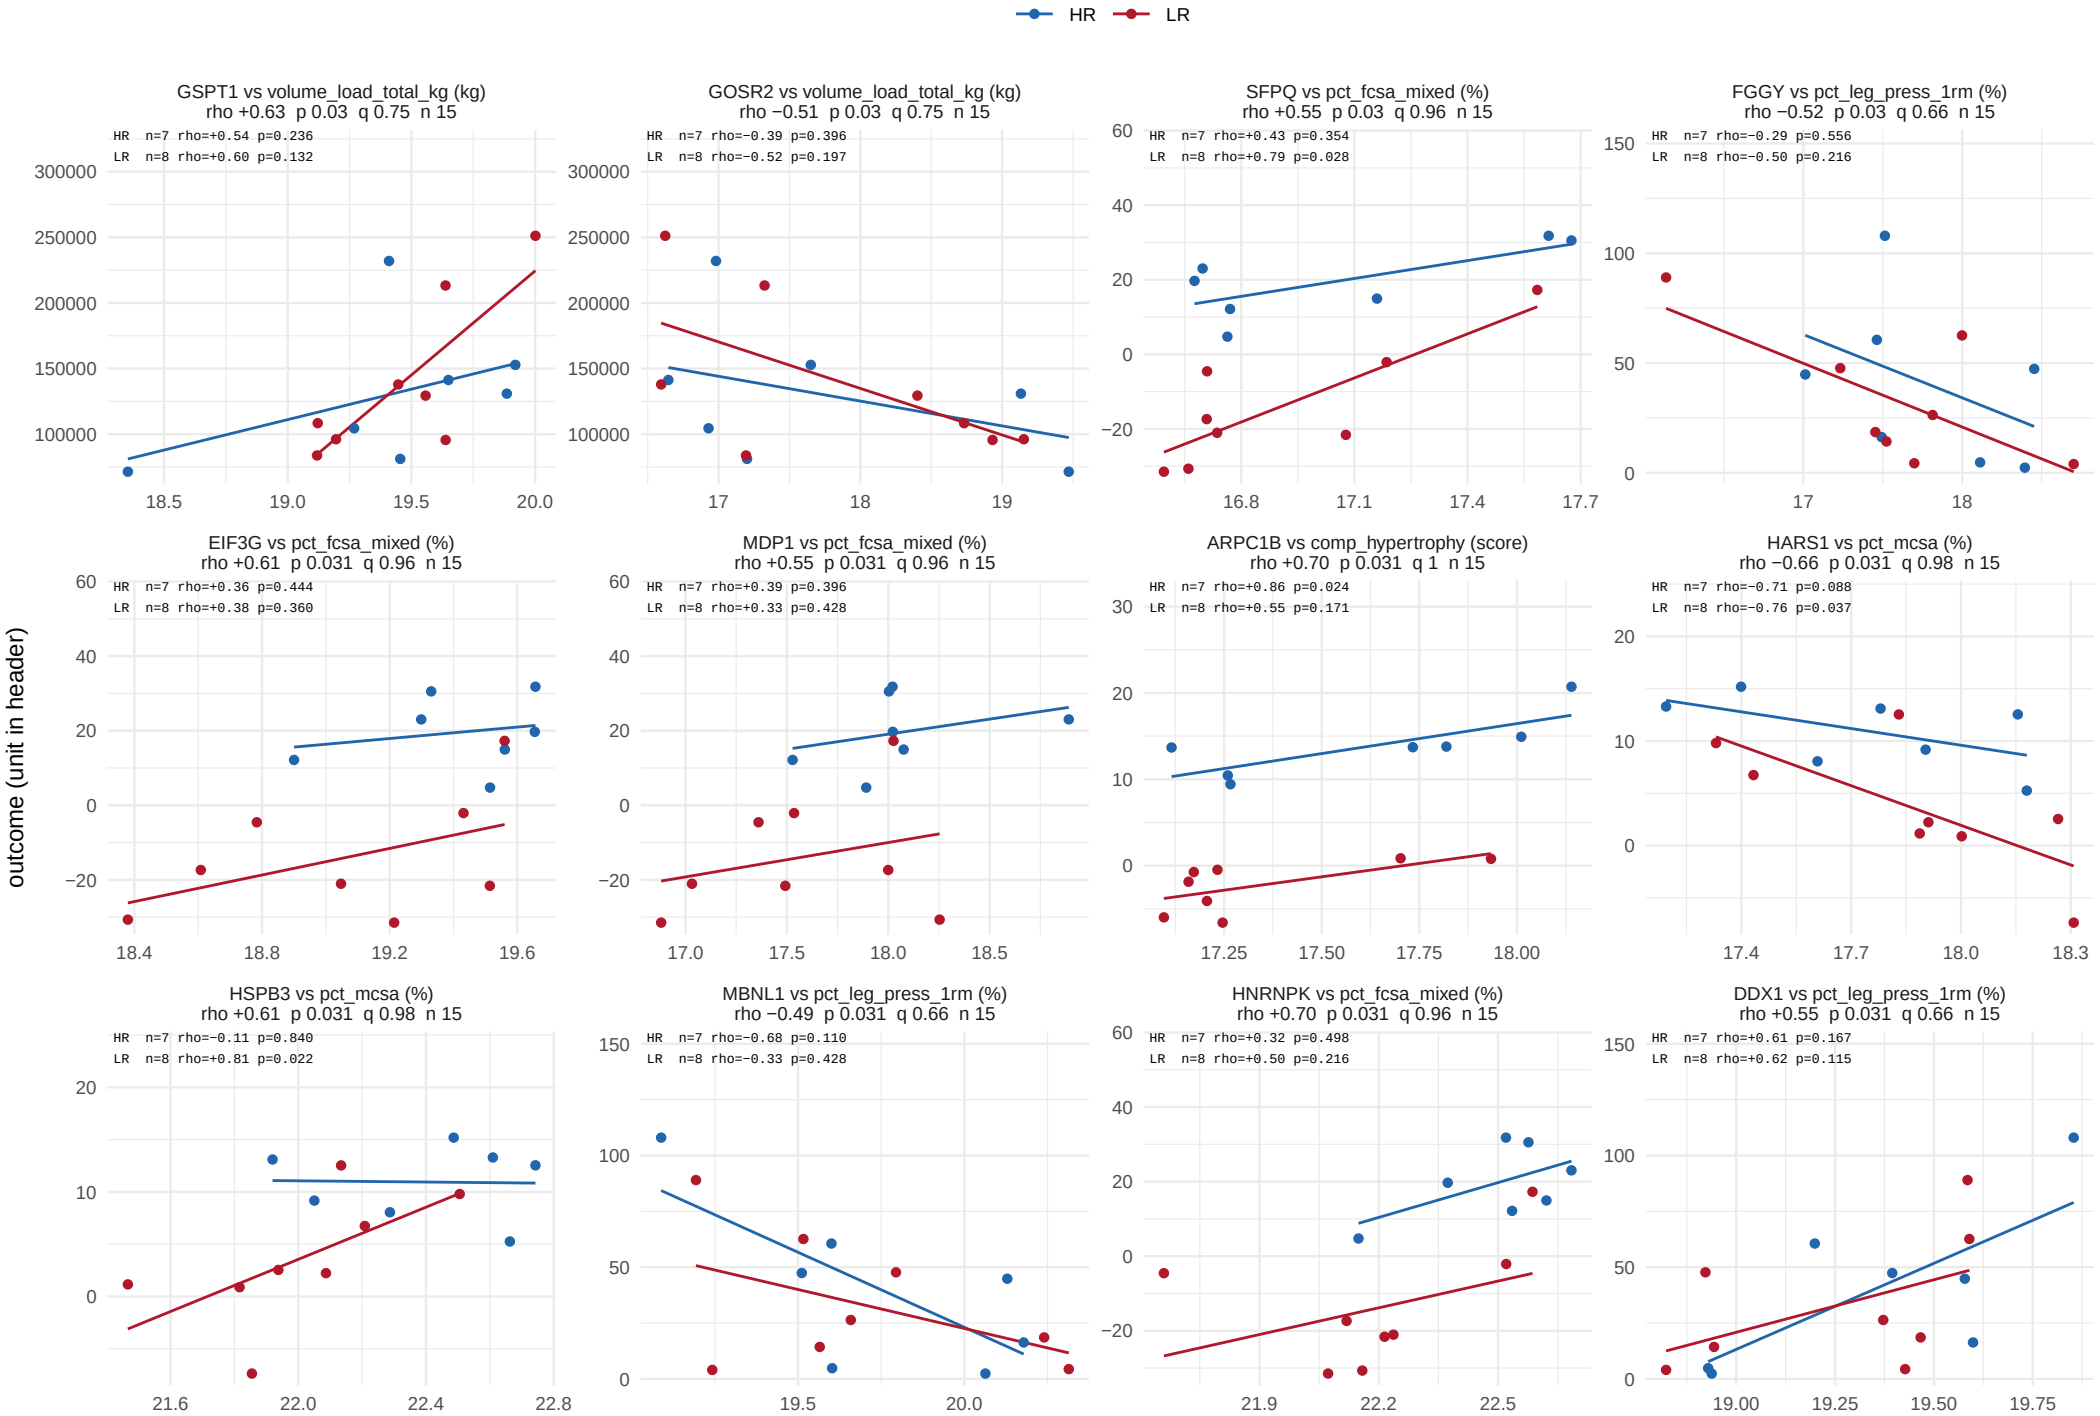

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


695 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 34 of 58.

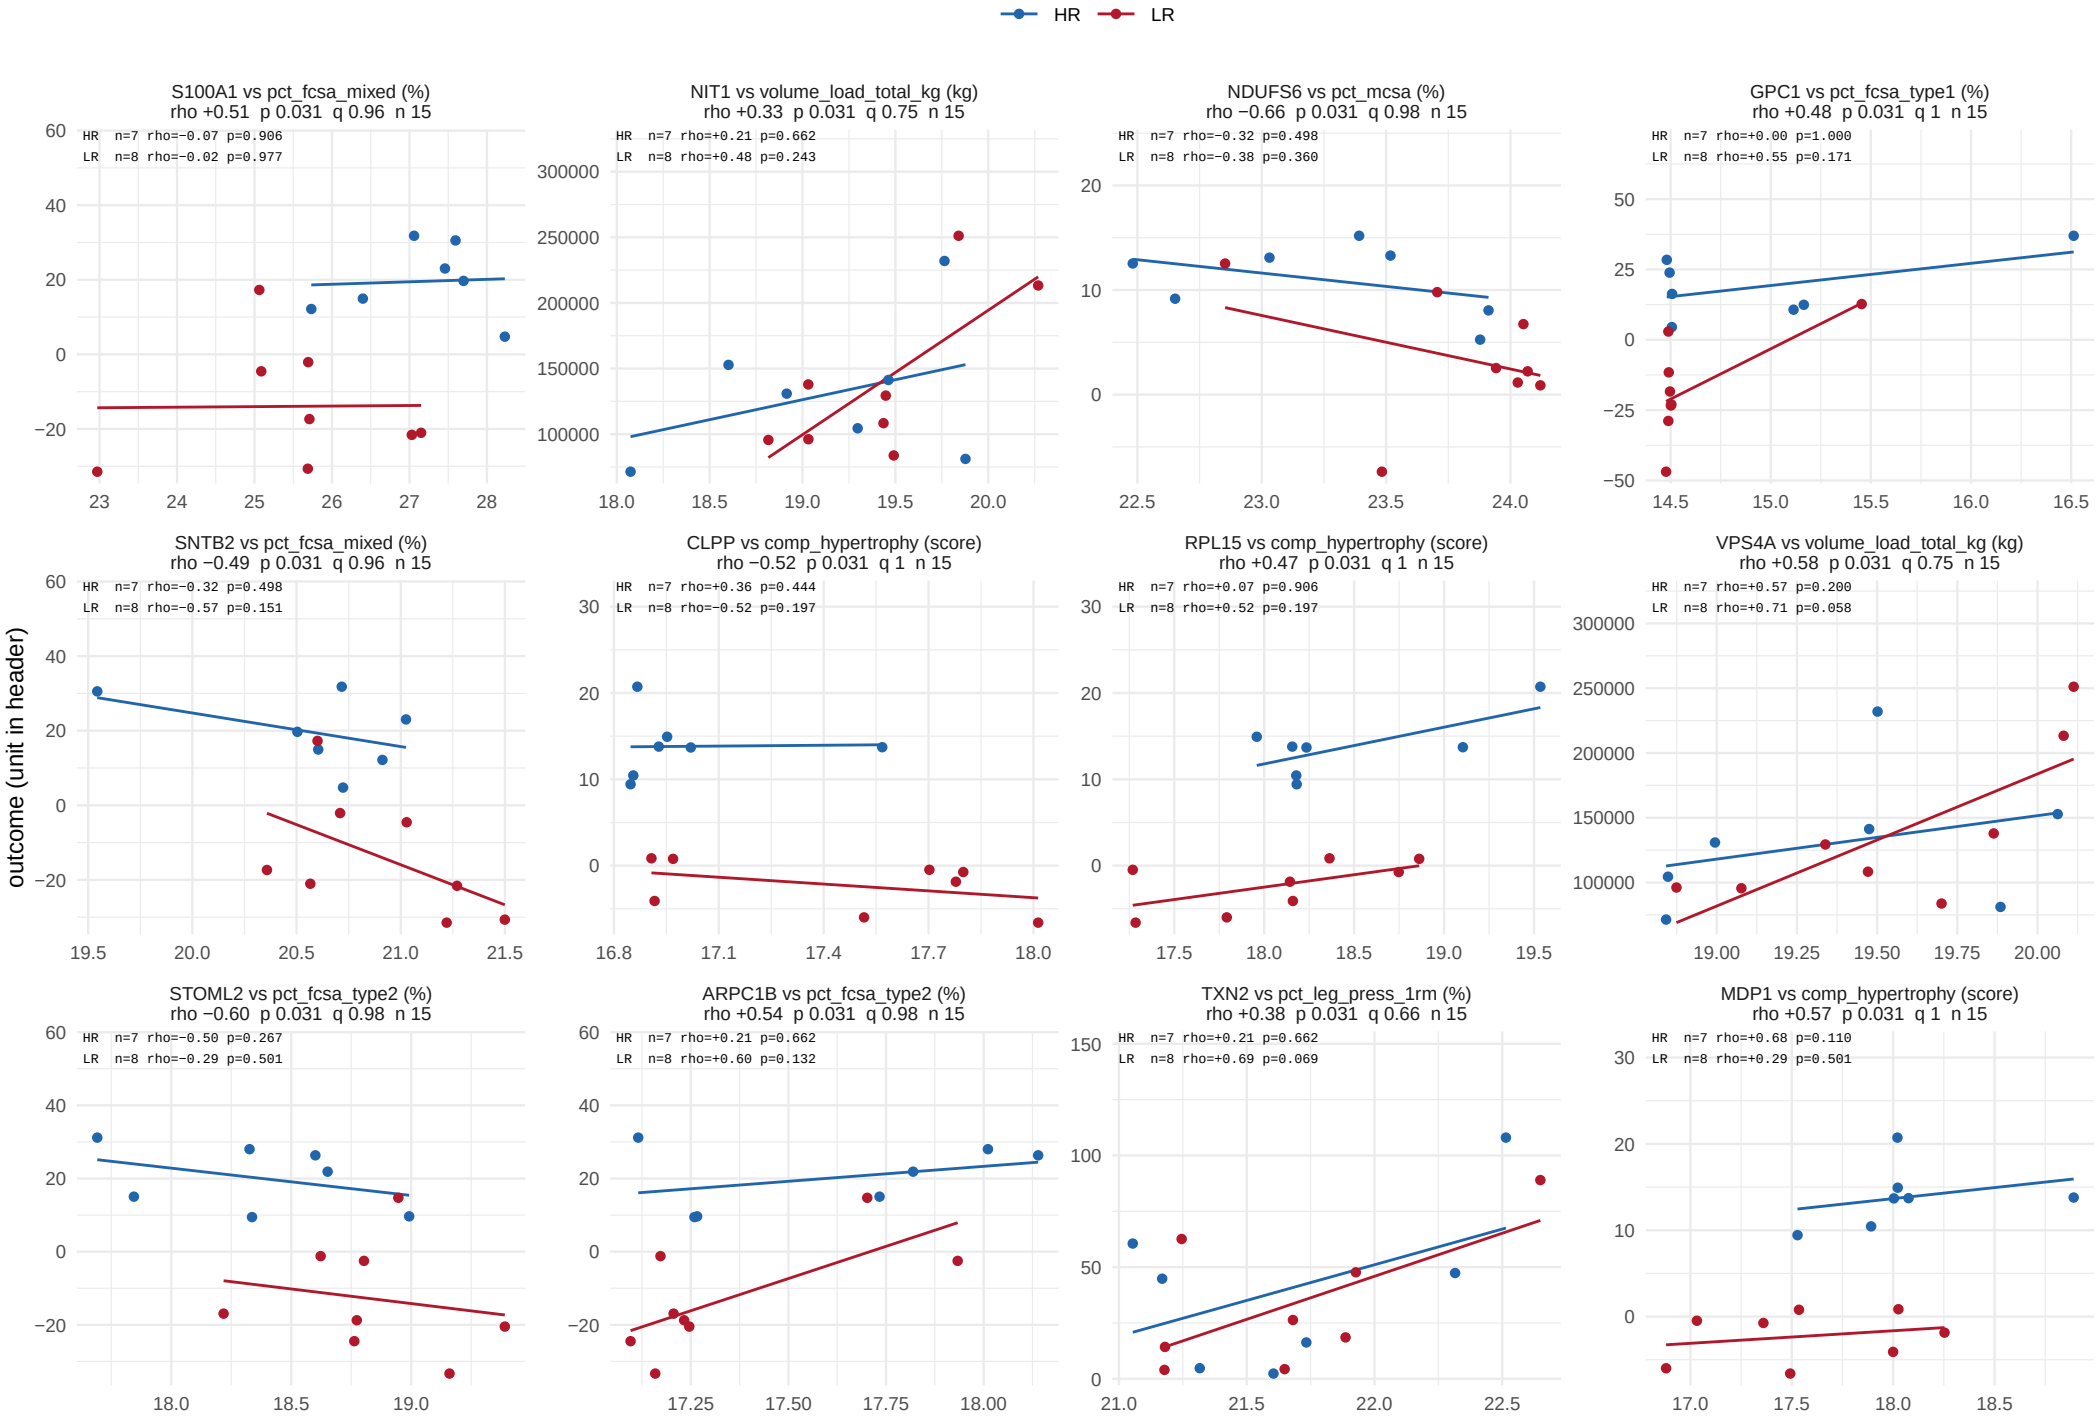

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


695 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 35 of 58.

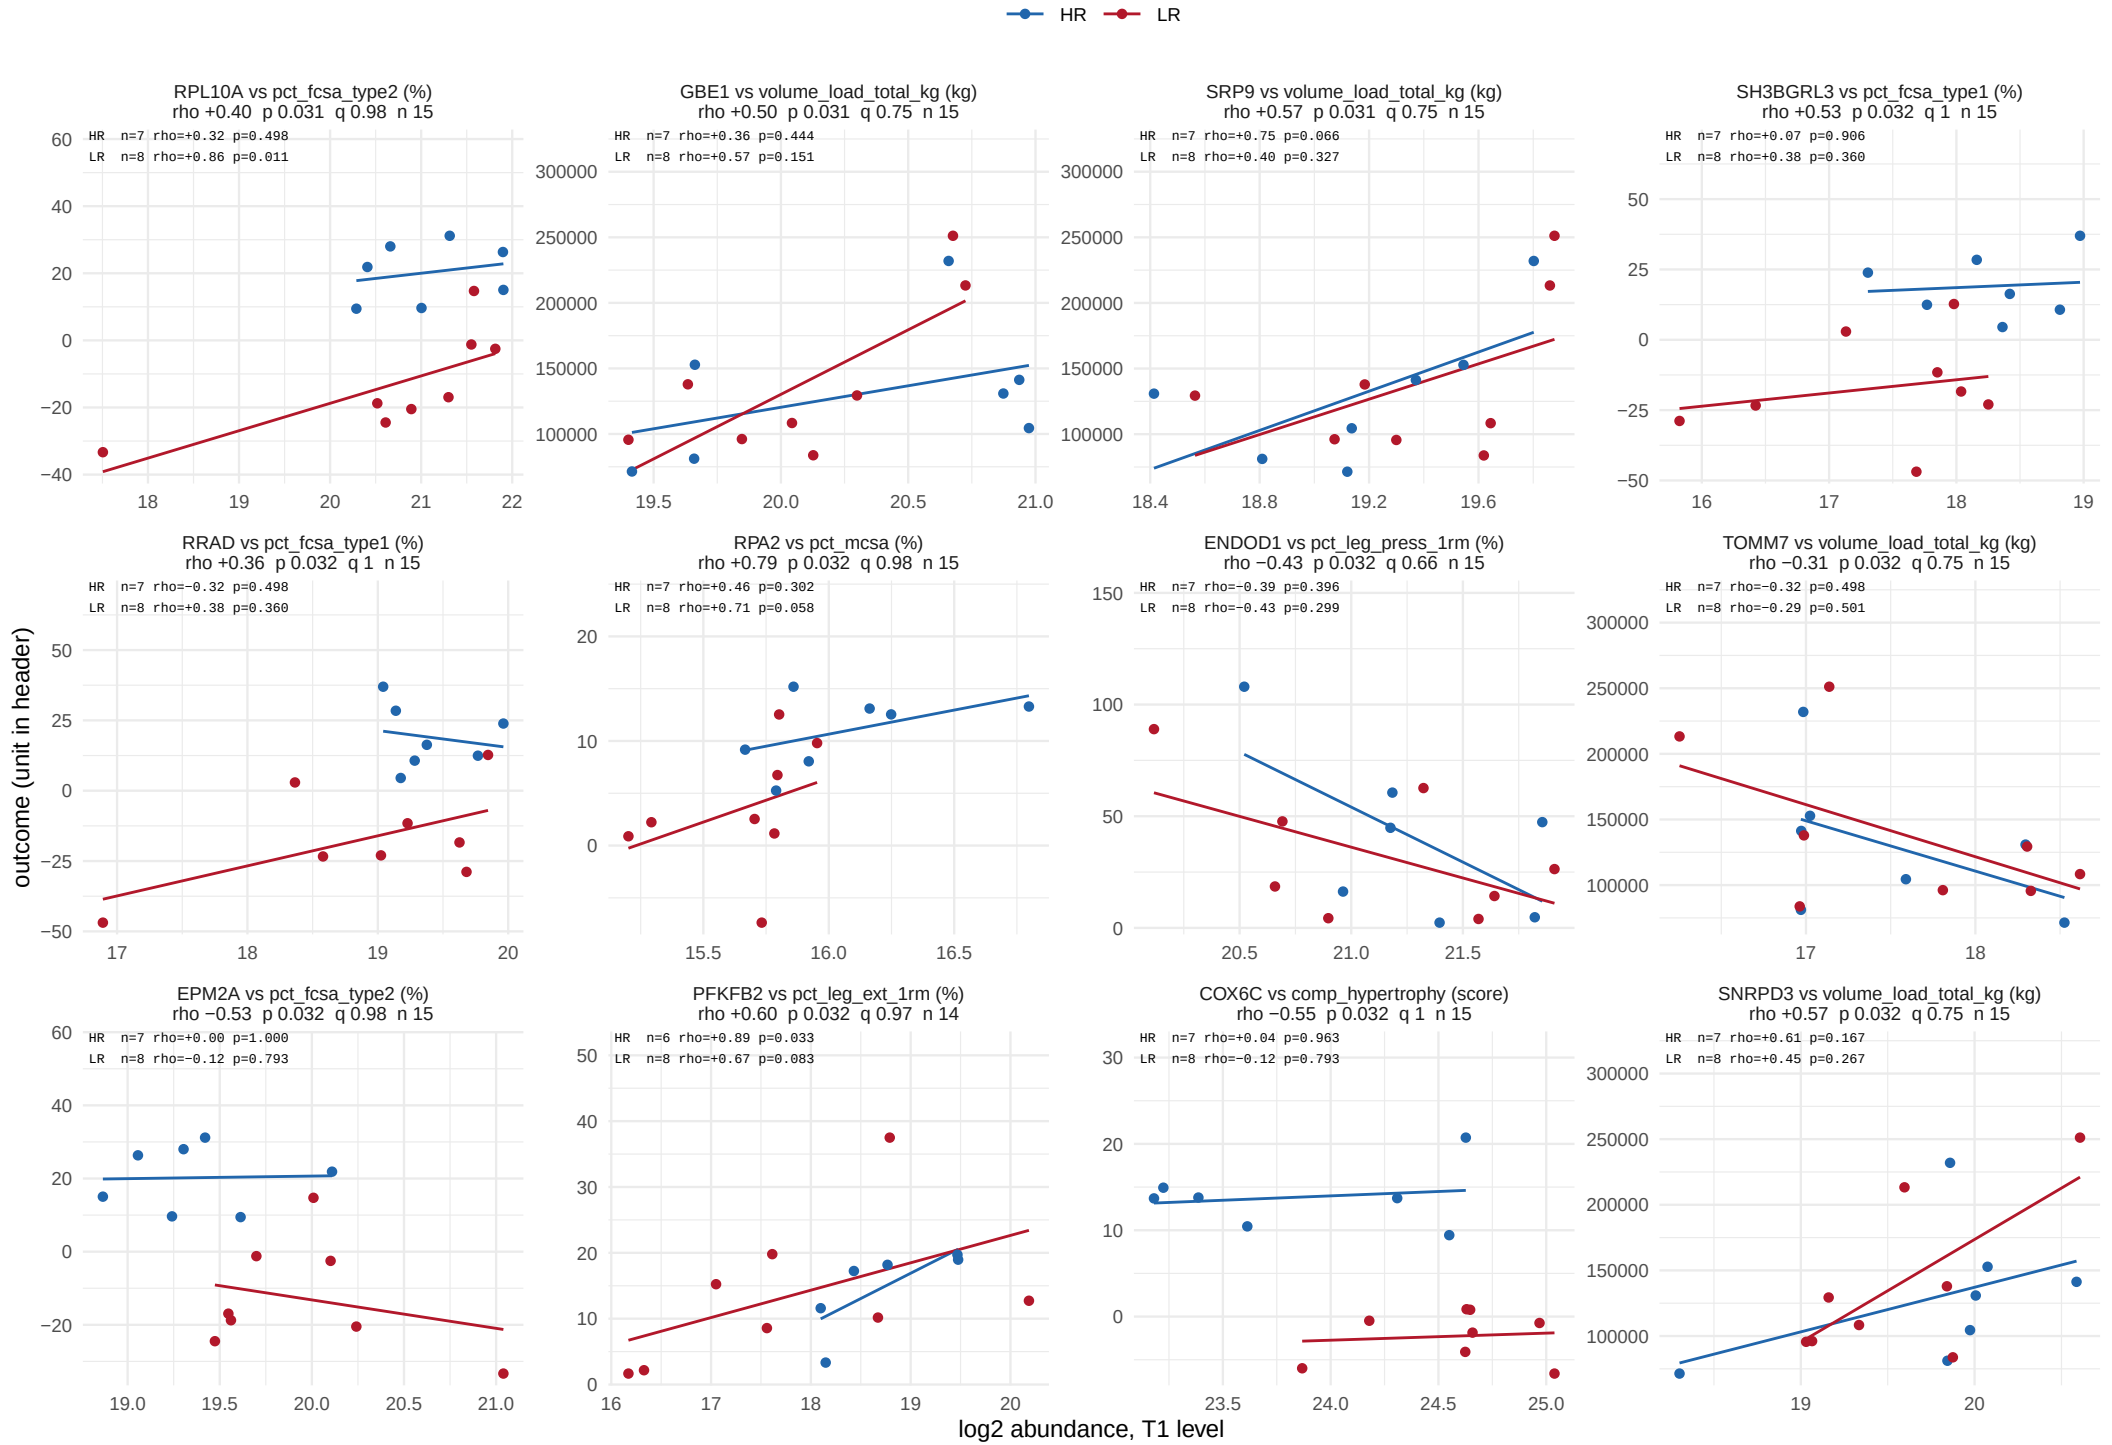

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


695 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 36 of 58.

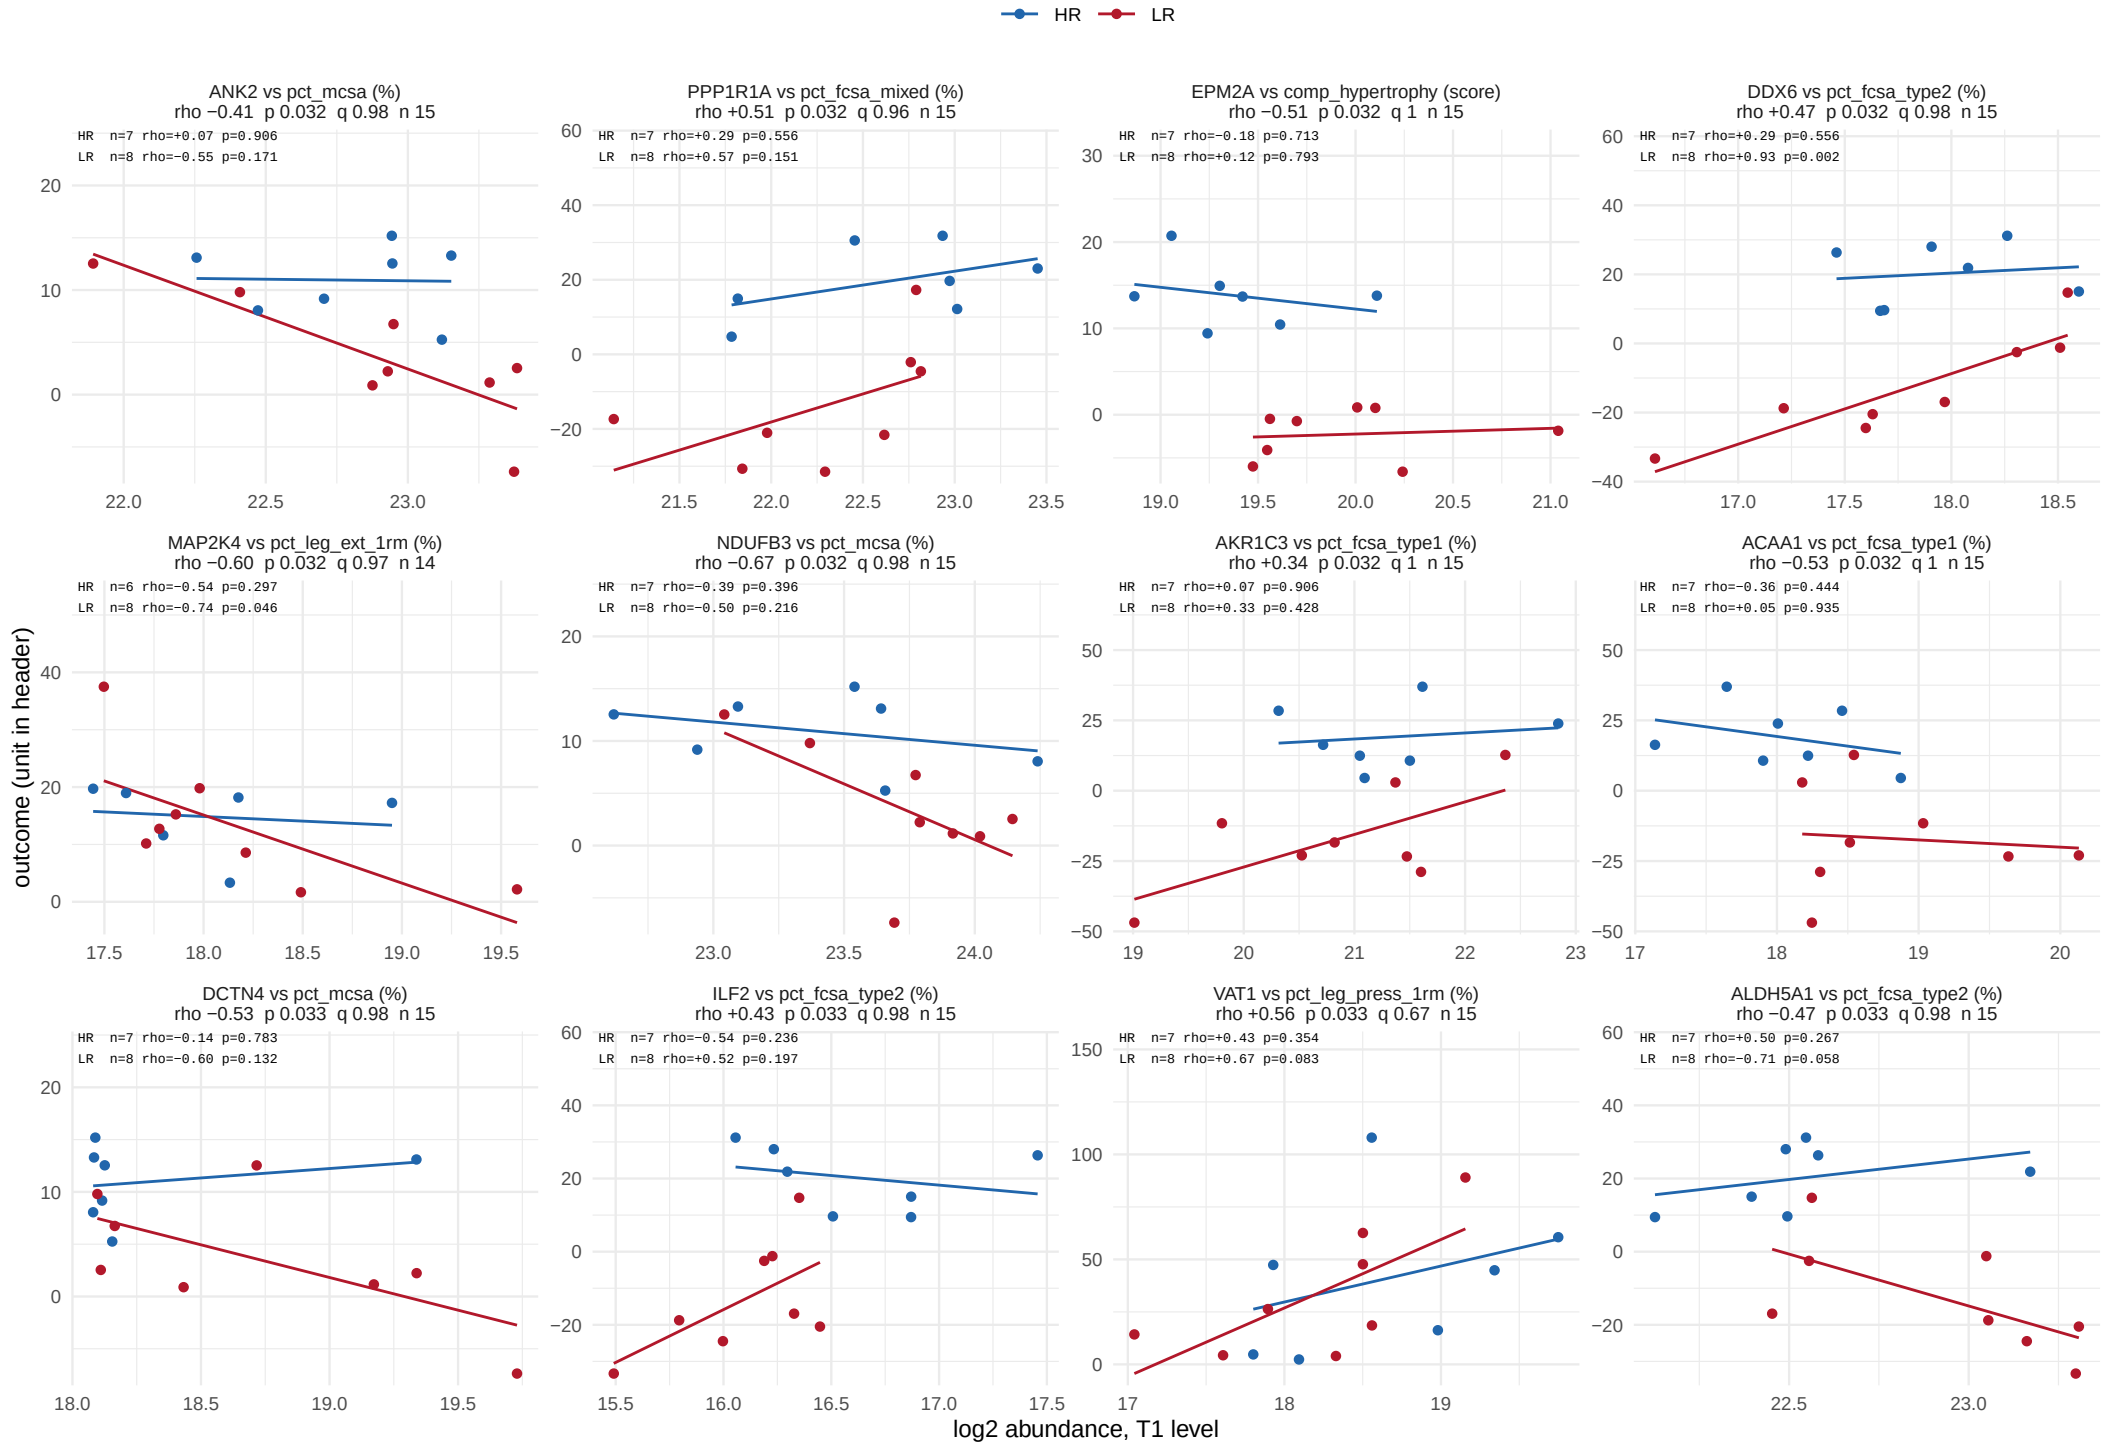

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


695 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 37 of 58.

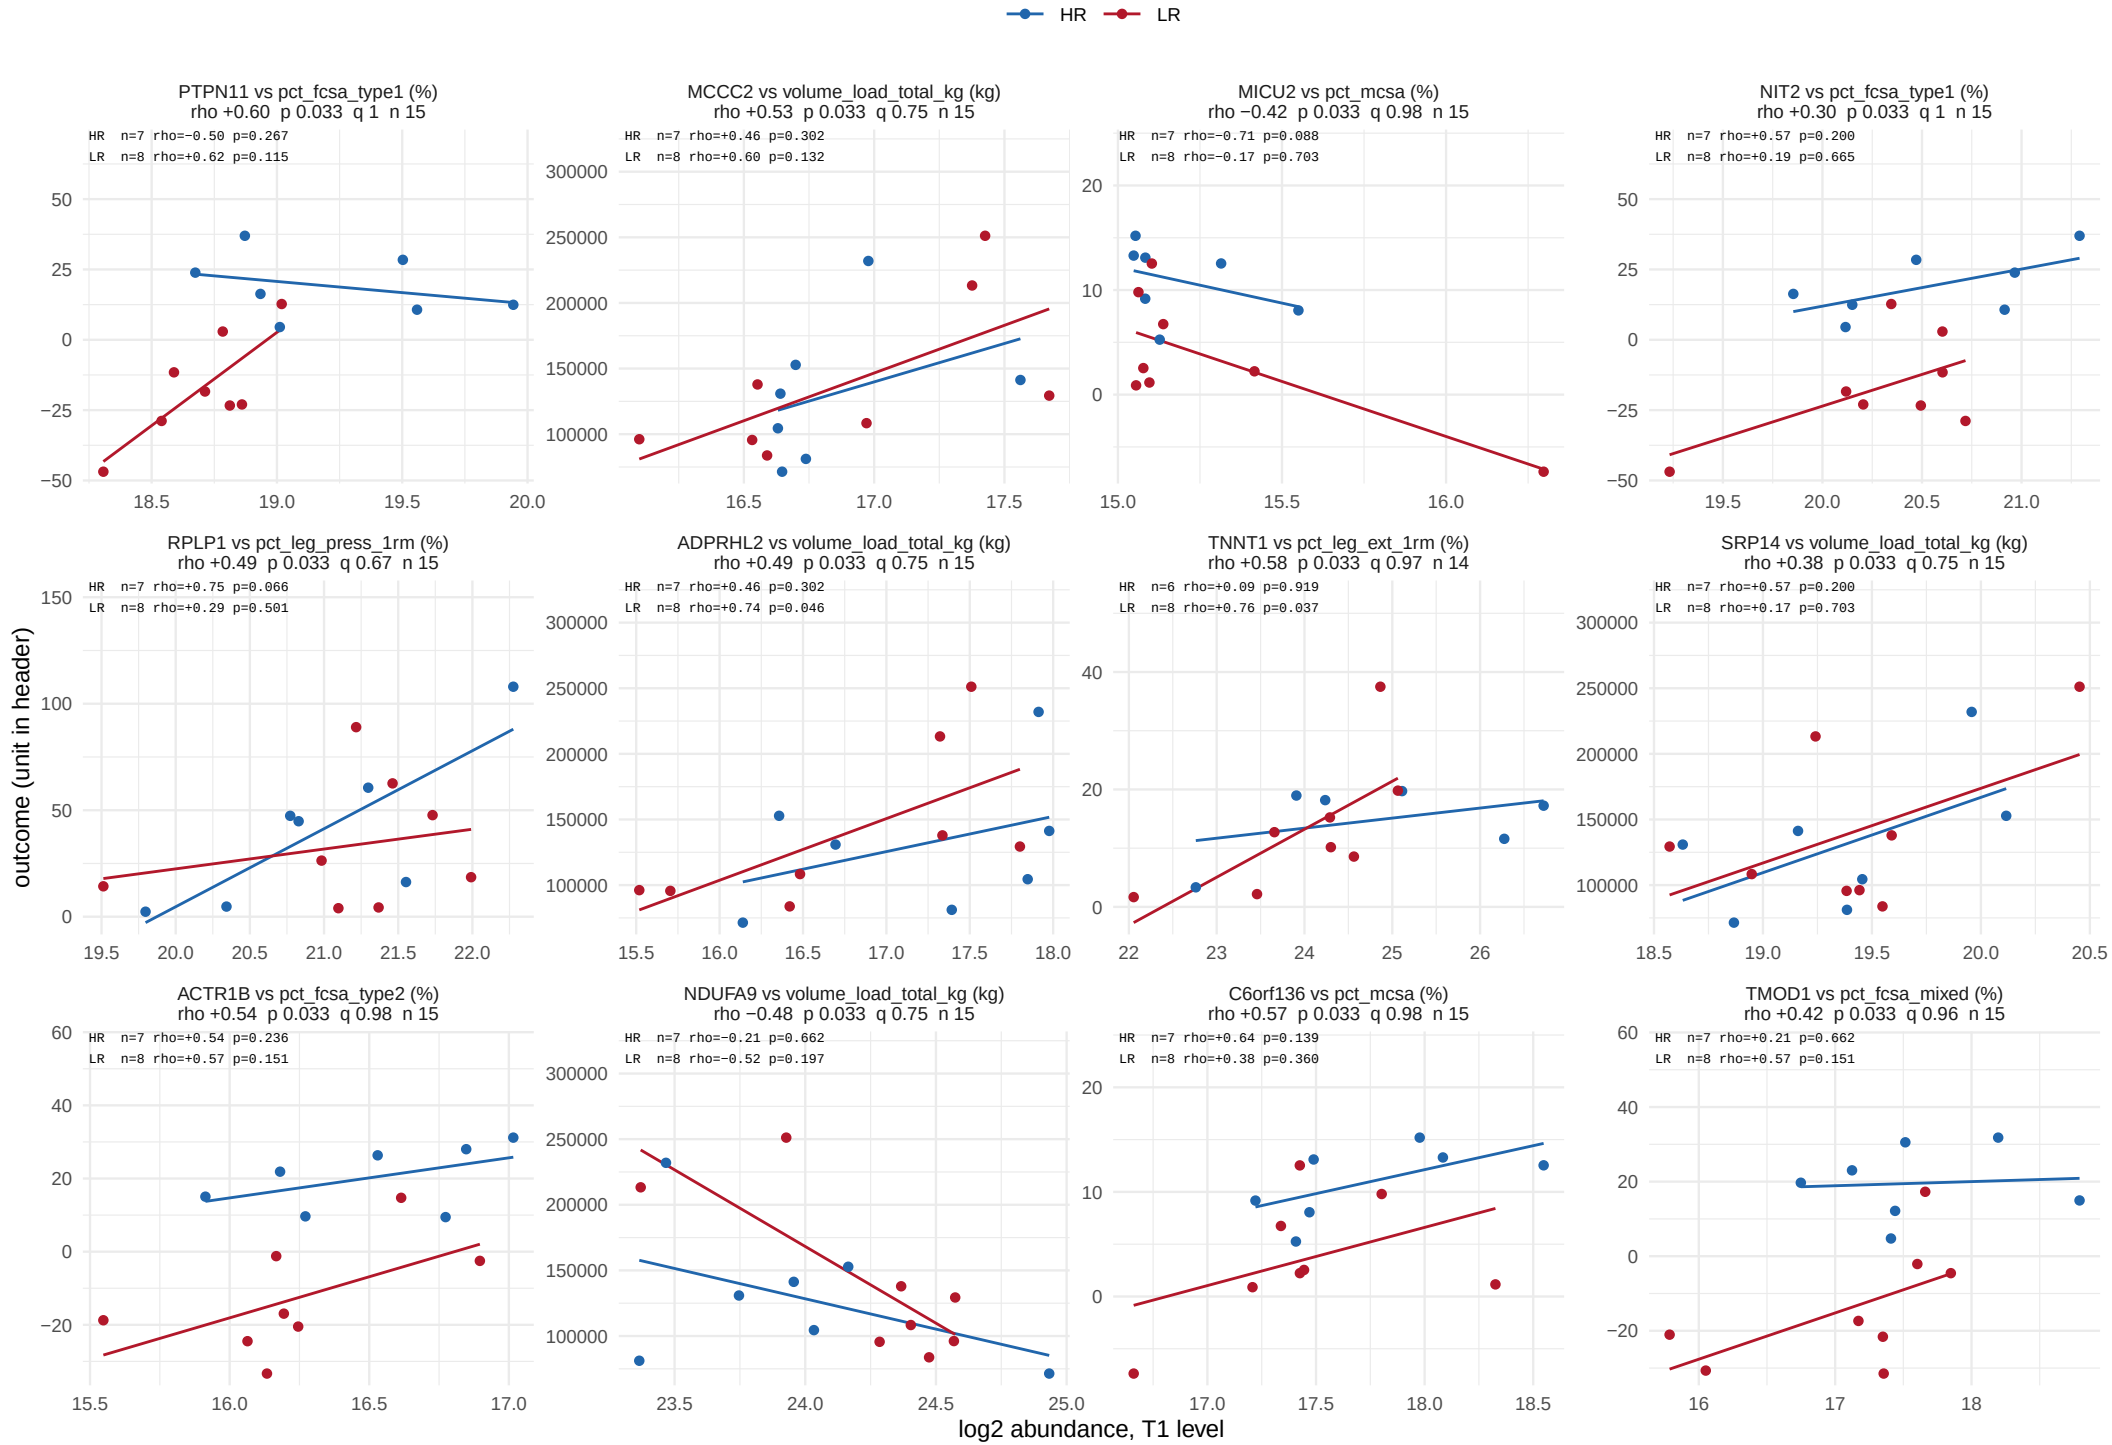

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


695 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 38 of 58.

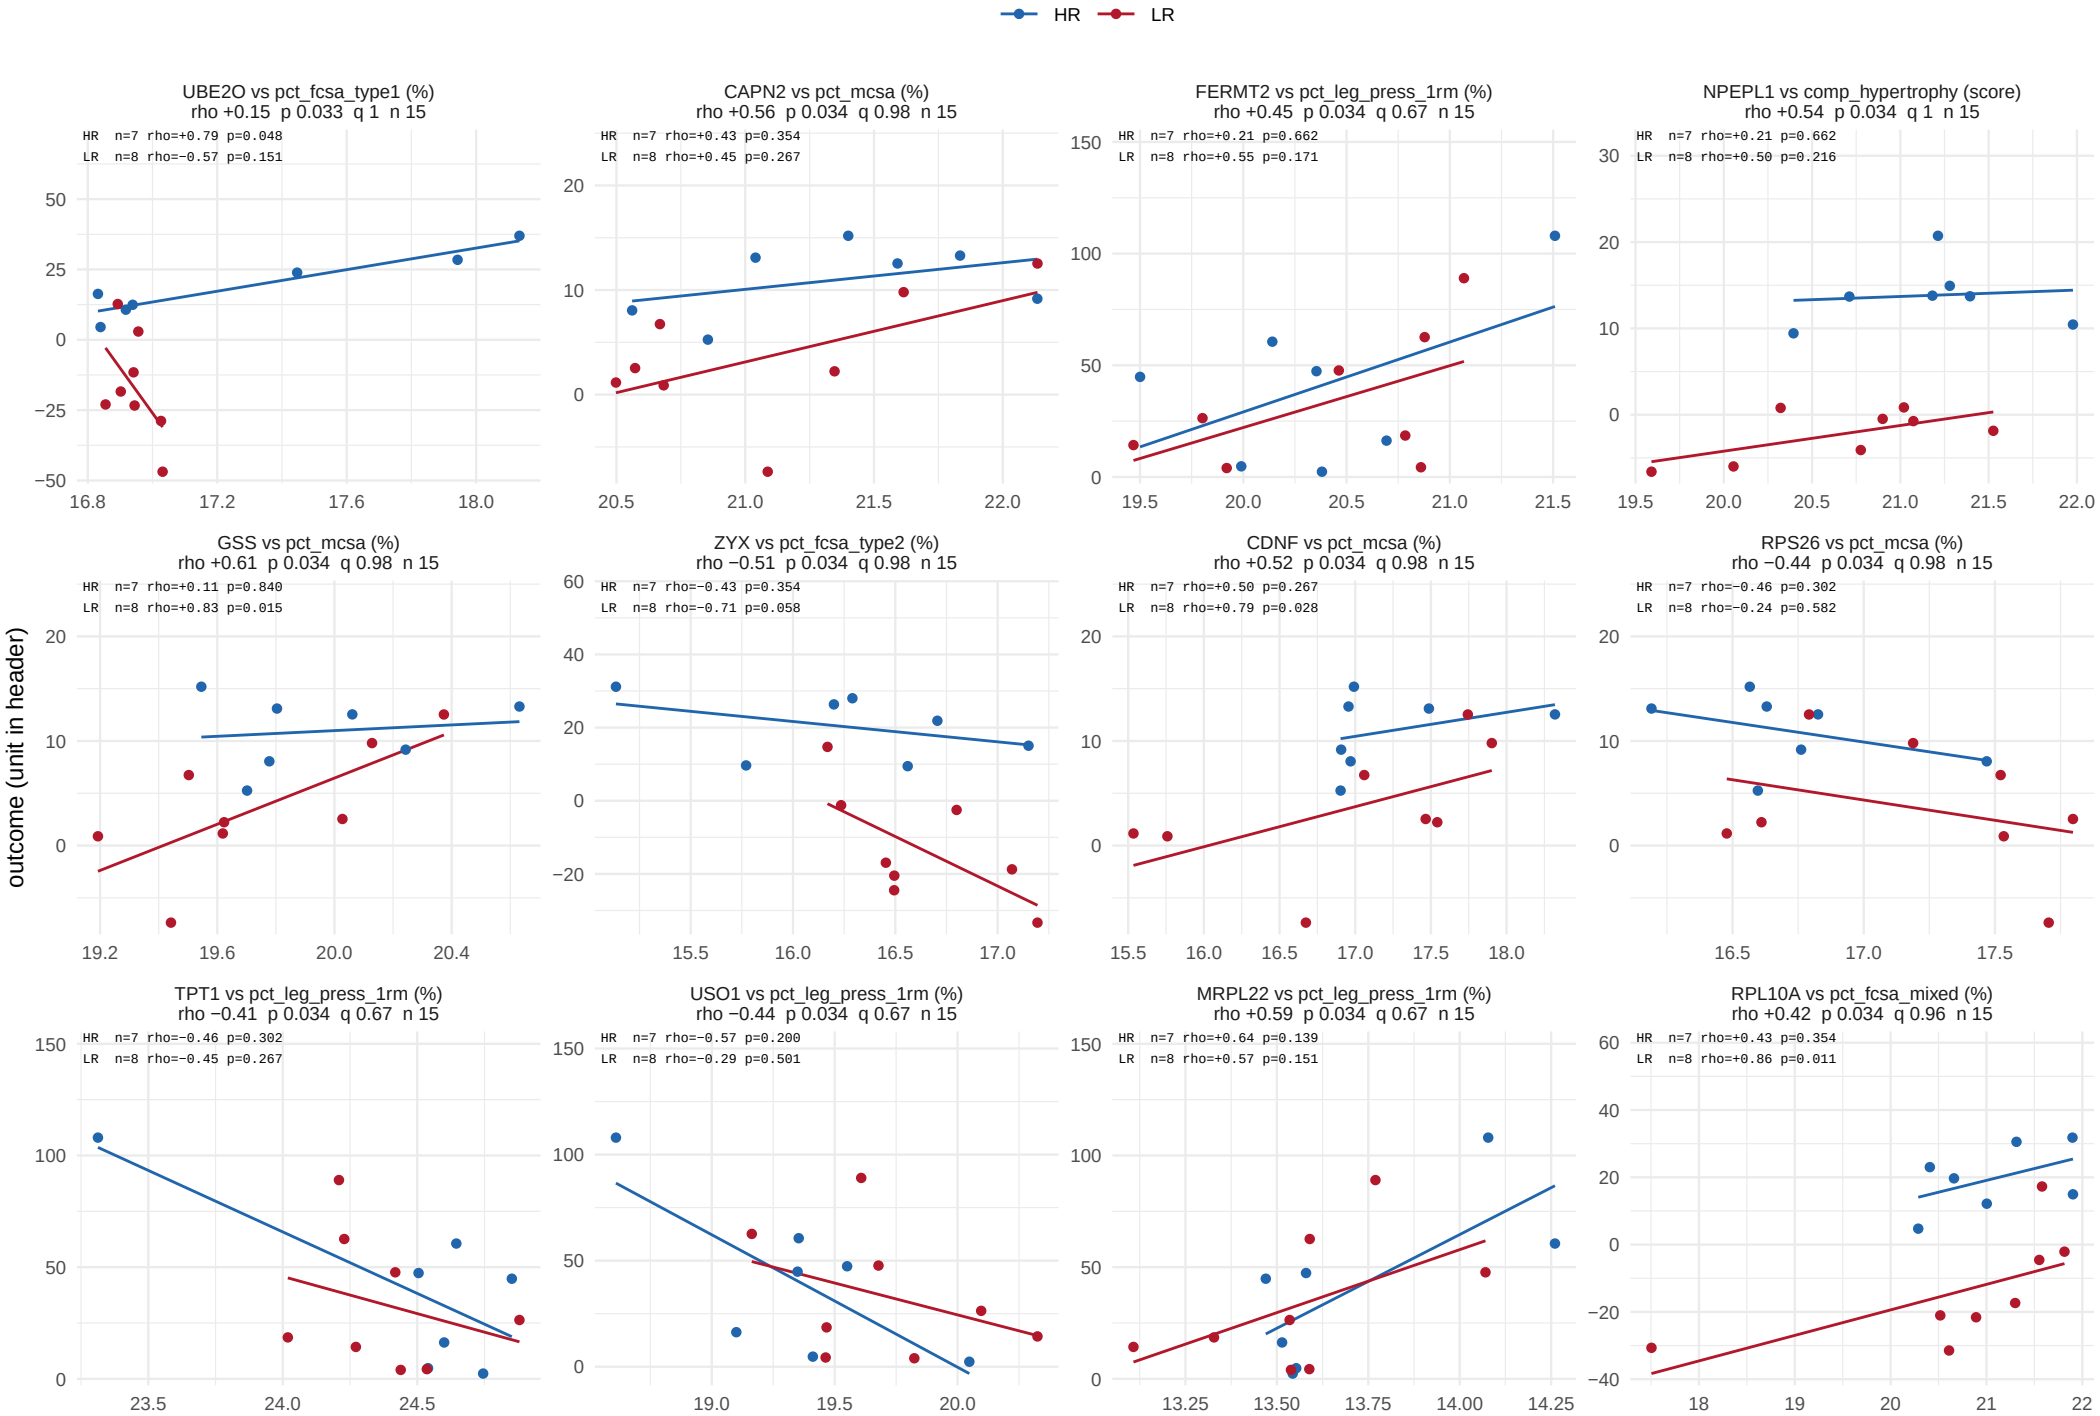

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


695 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 39 of 58.

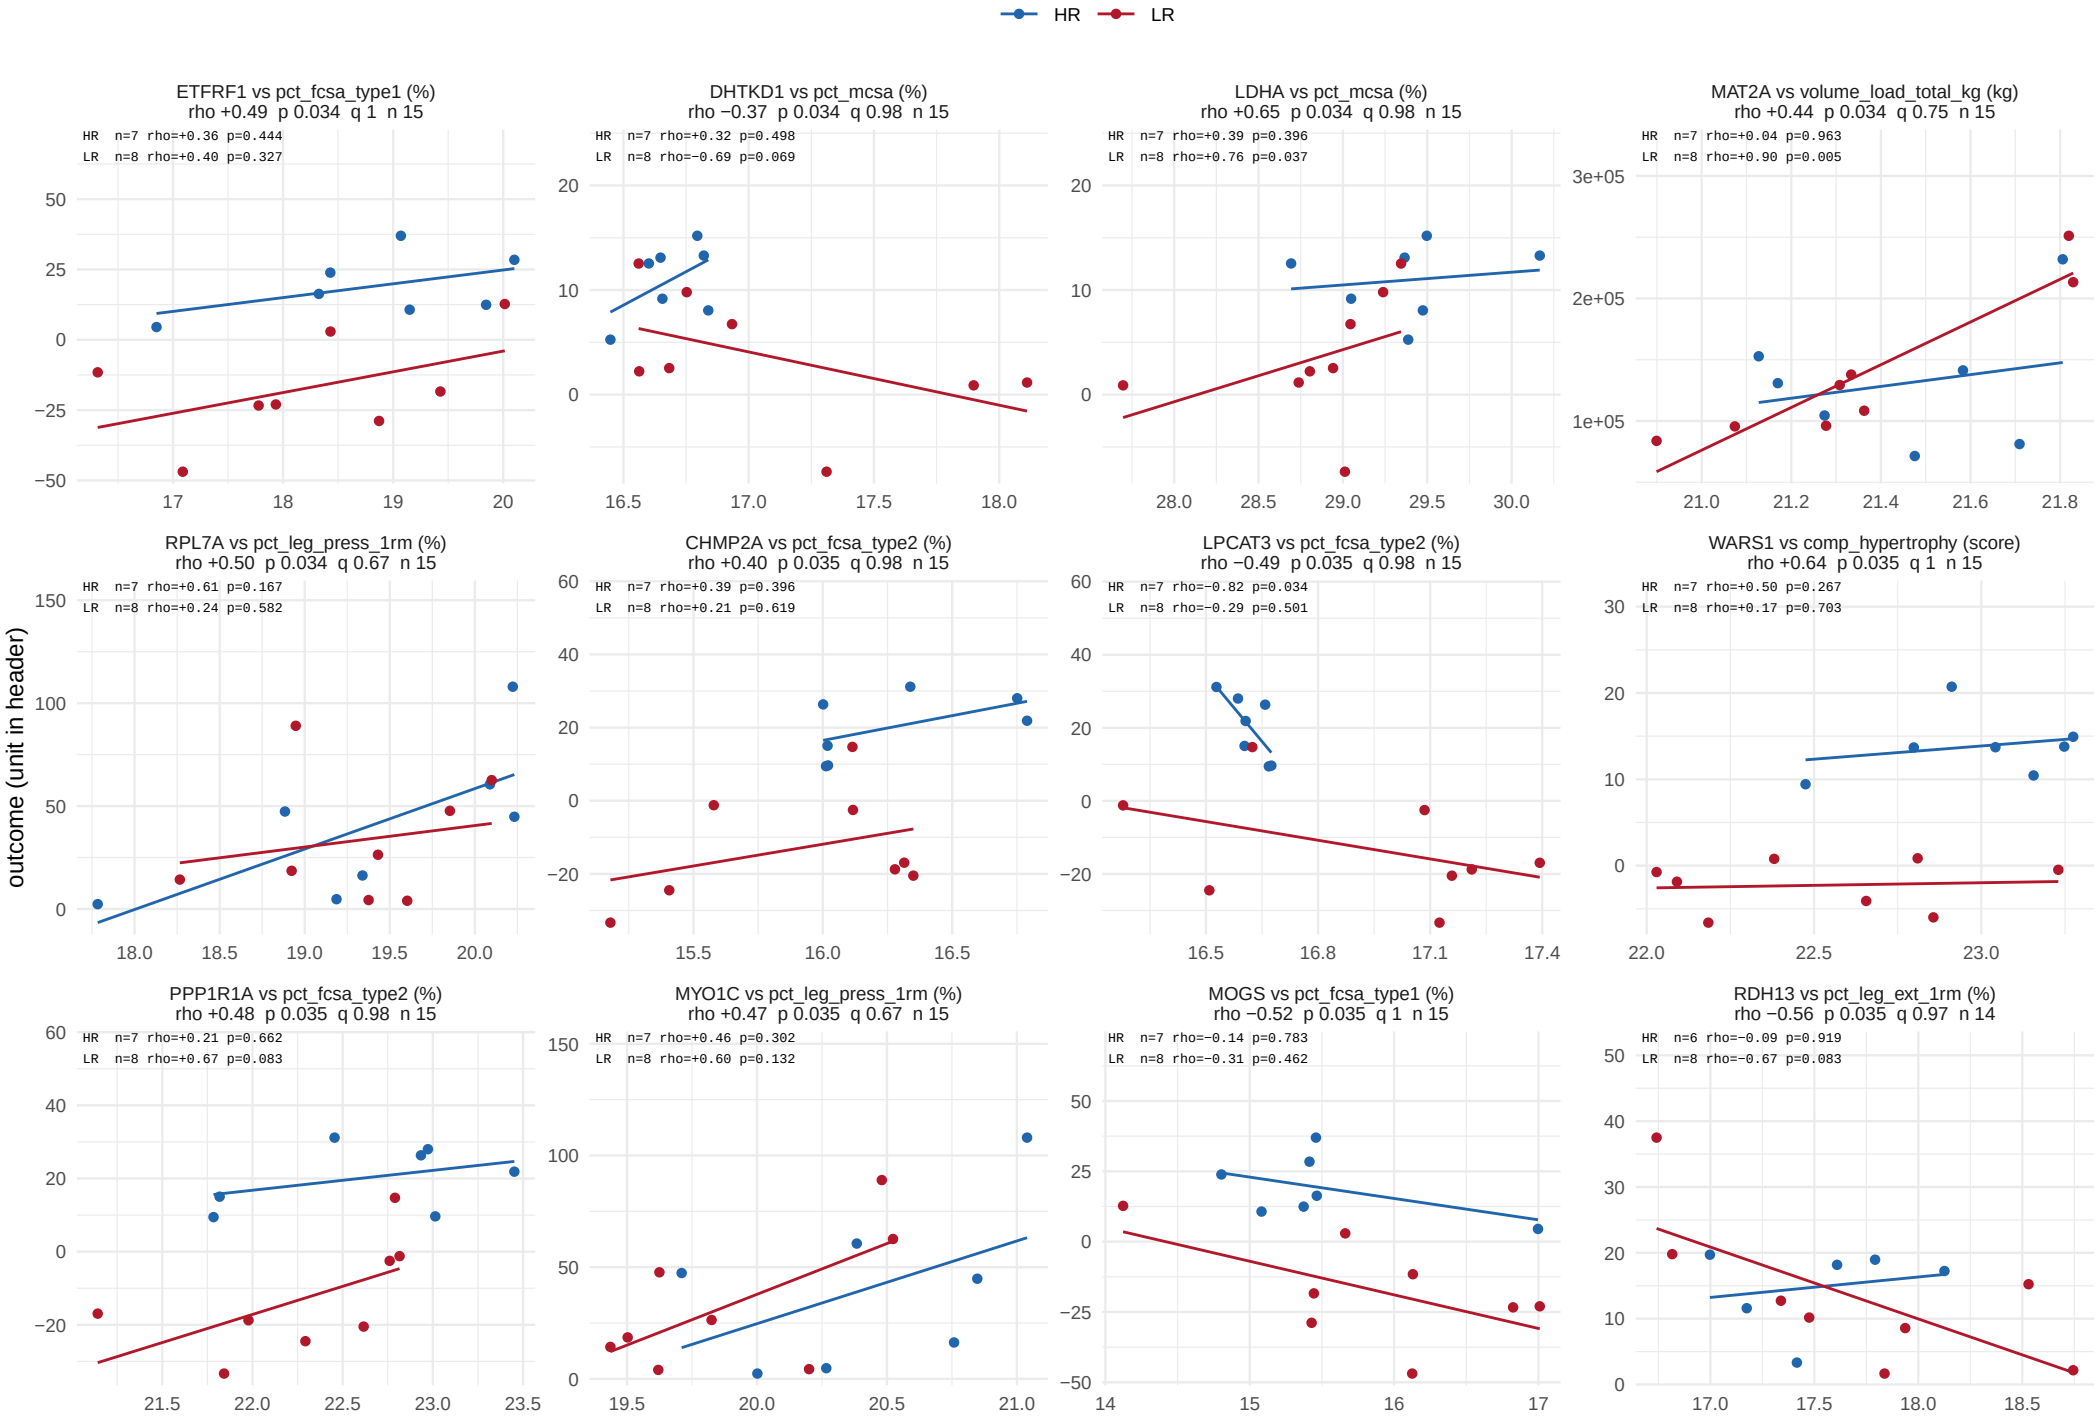

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


695 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 40 of 58.

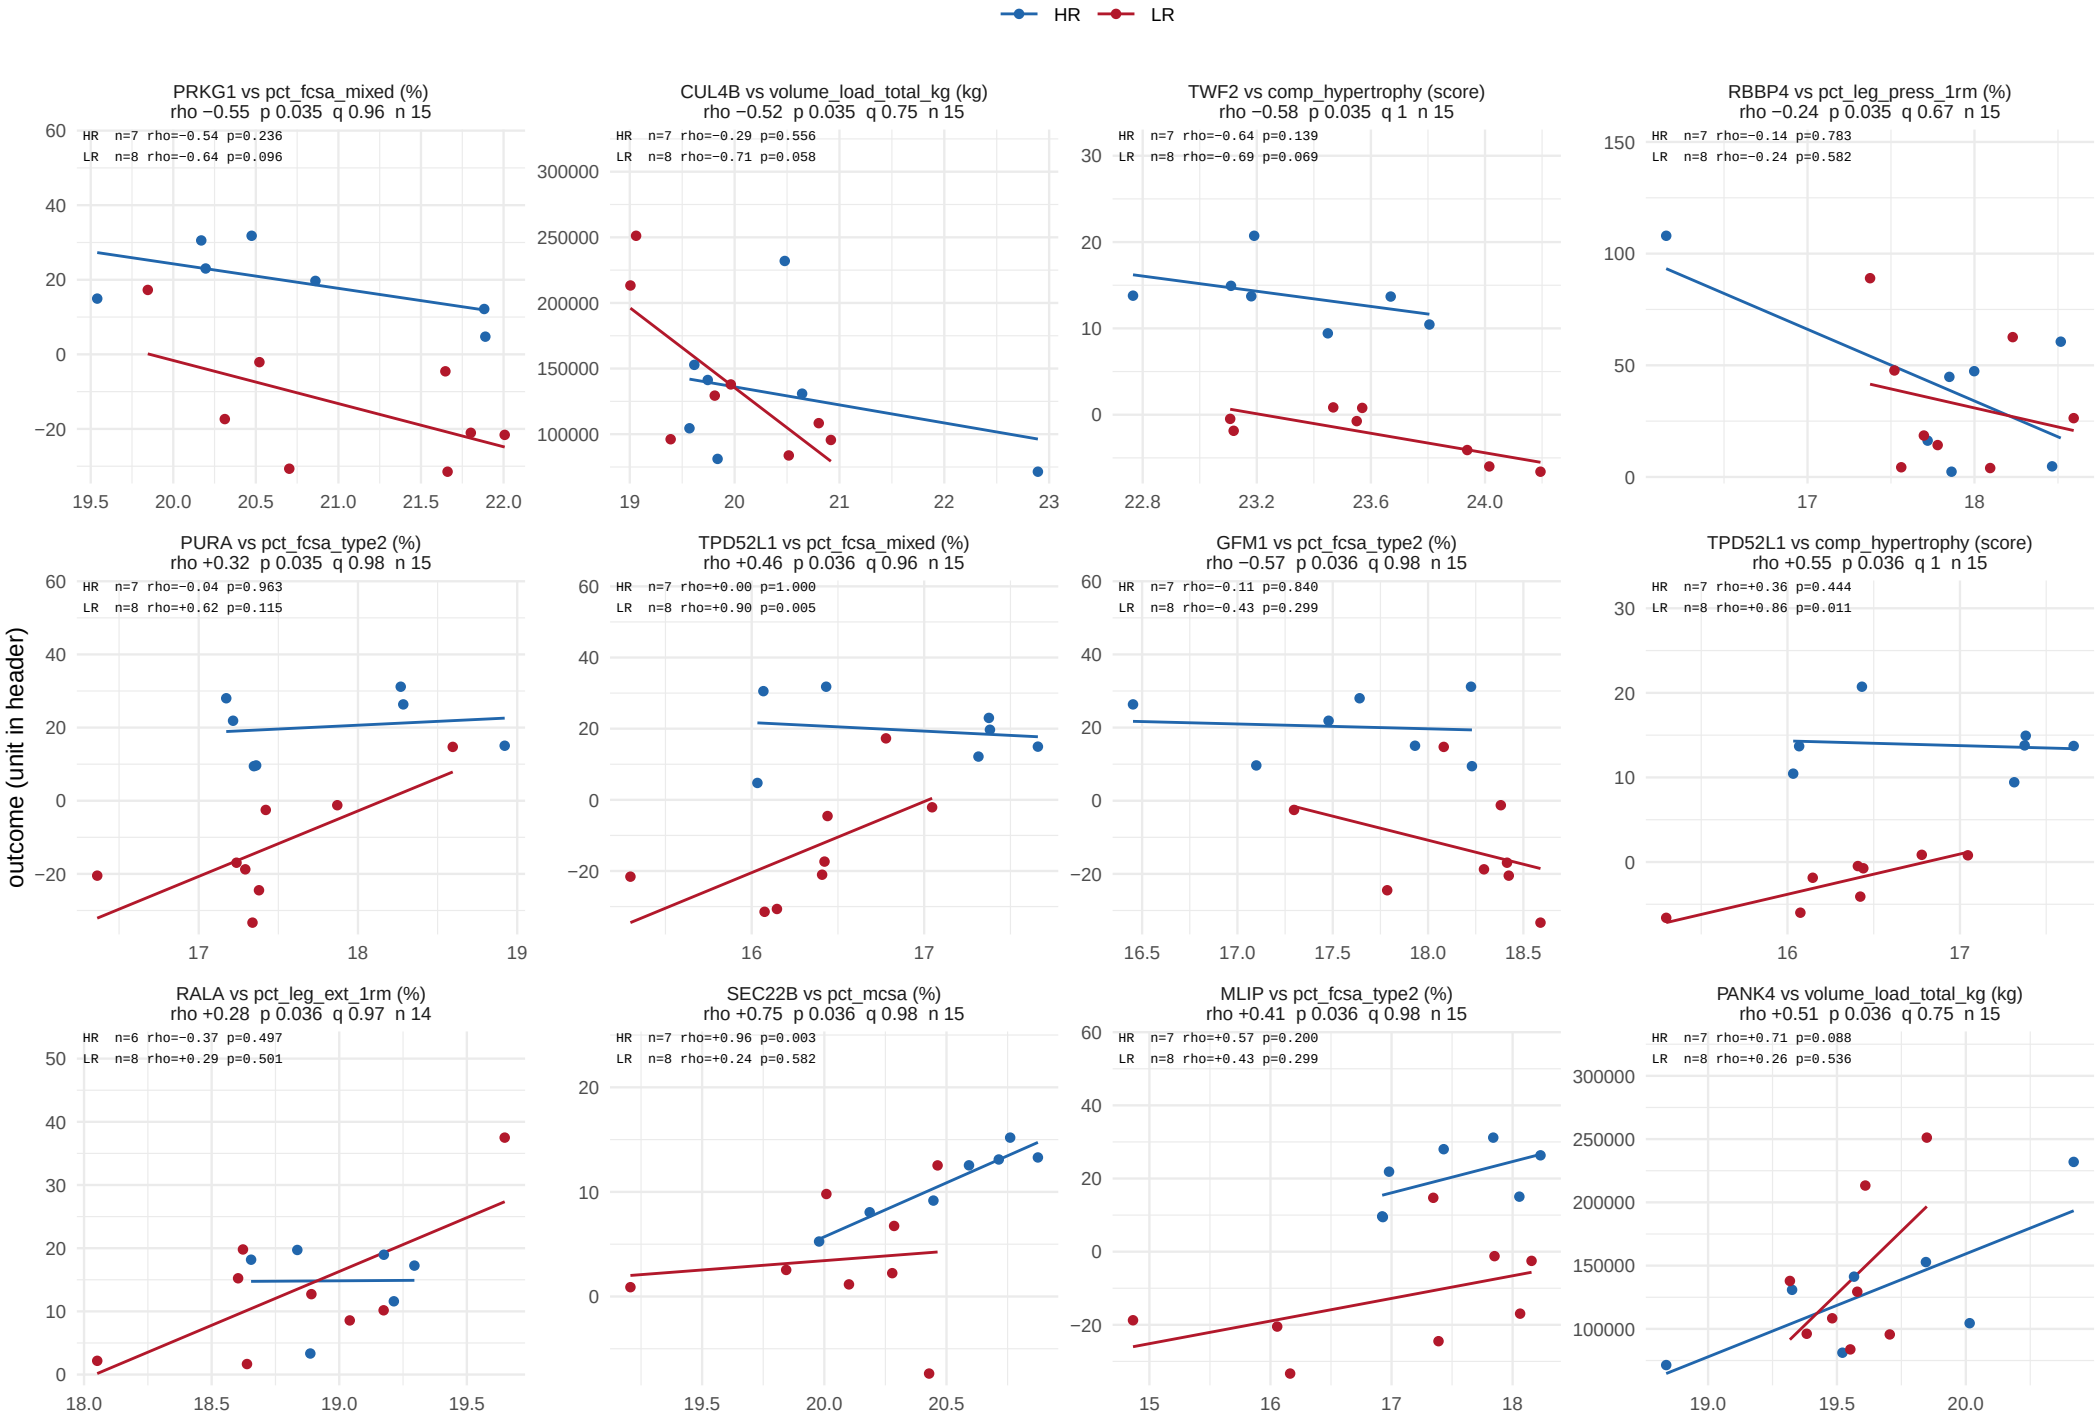

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


695 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 41 of 58.

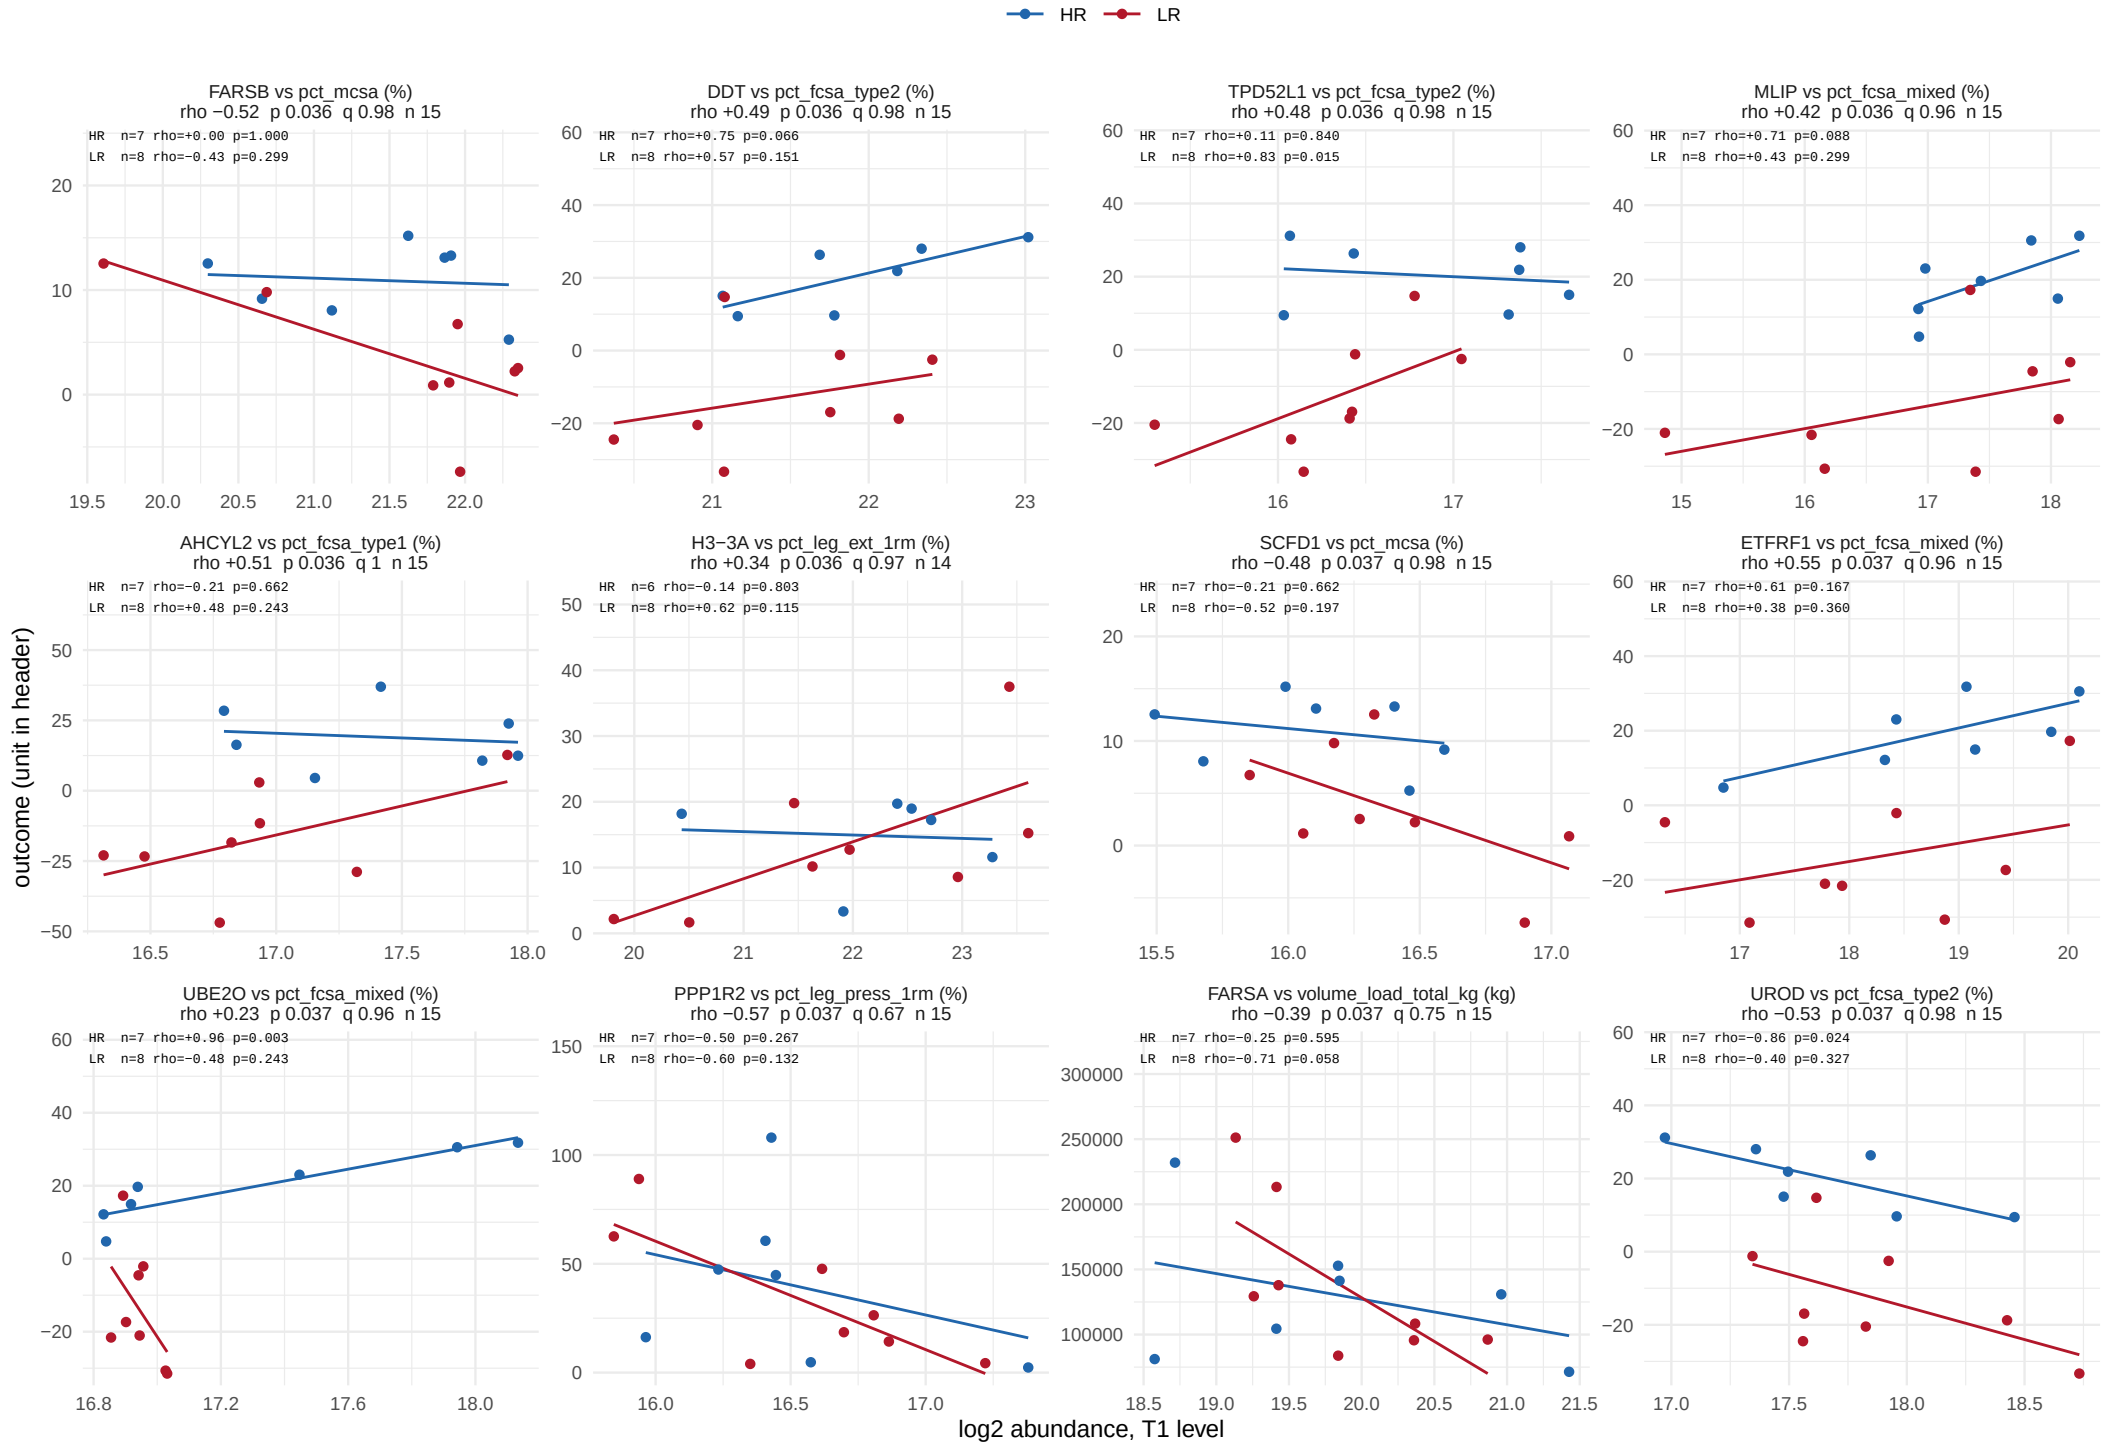

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


695 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 42 of 58.

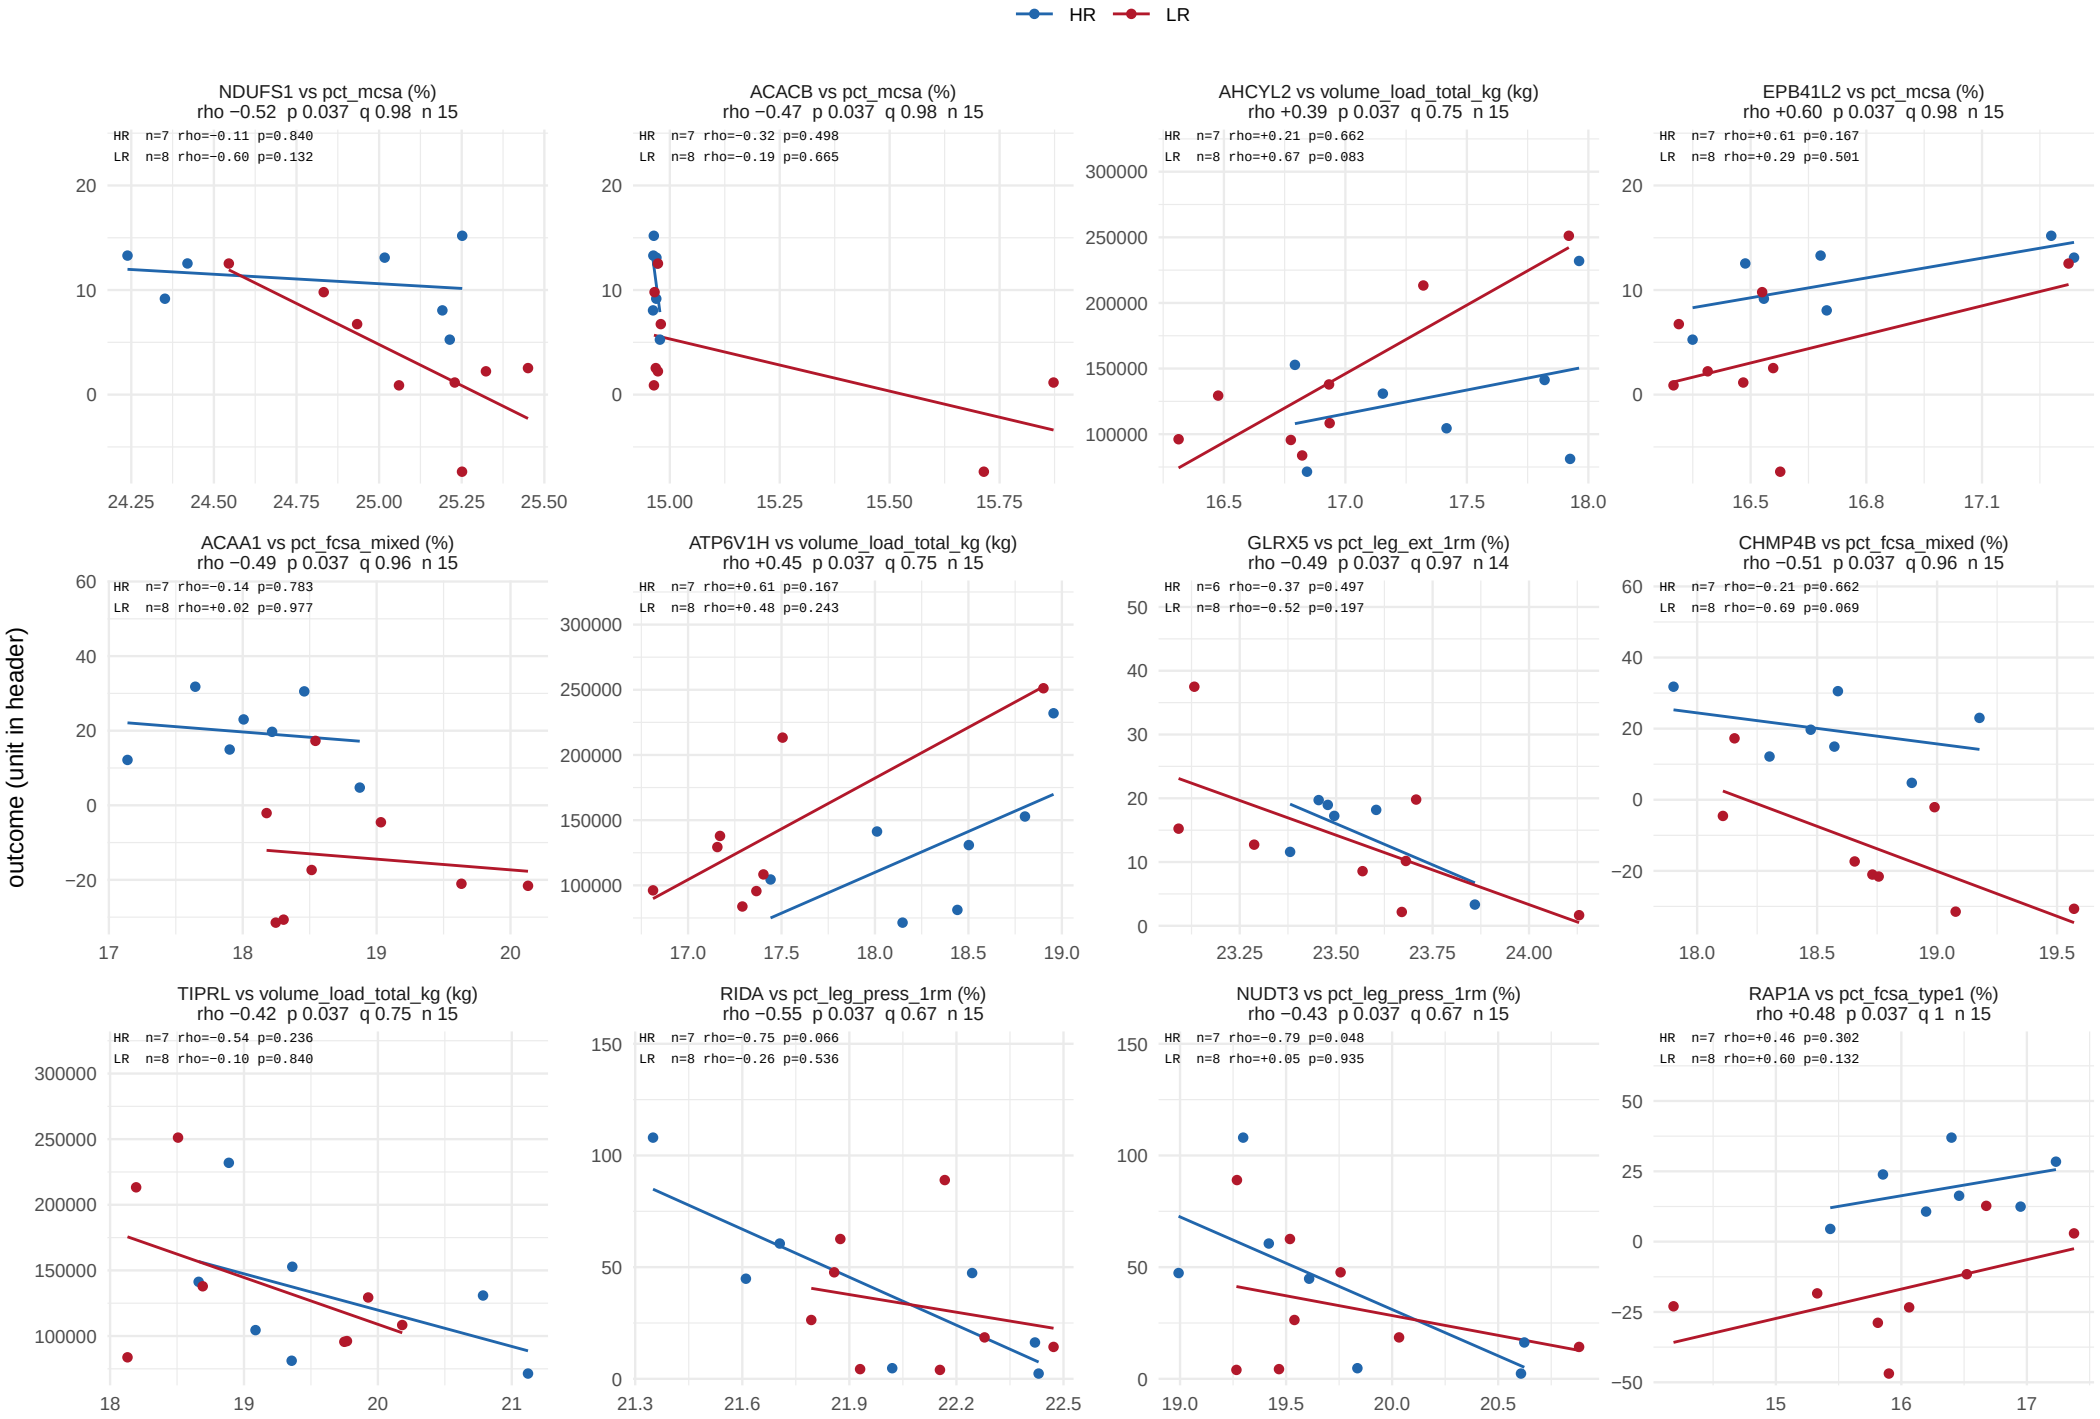

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


695 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 43 of 58.

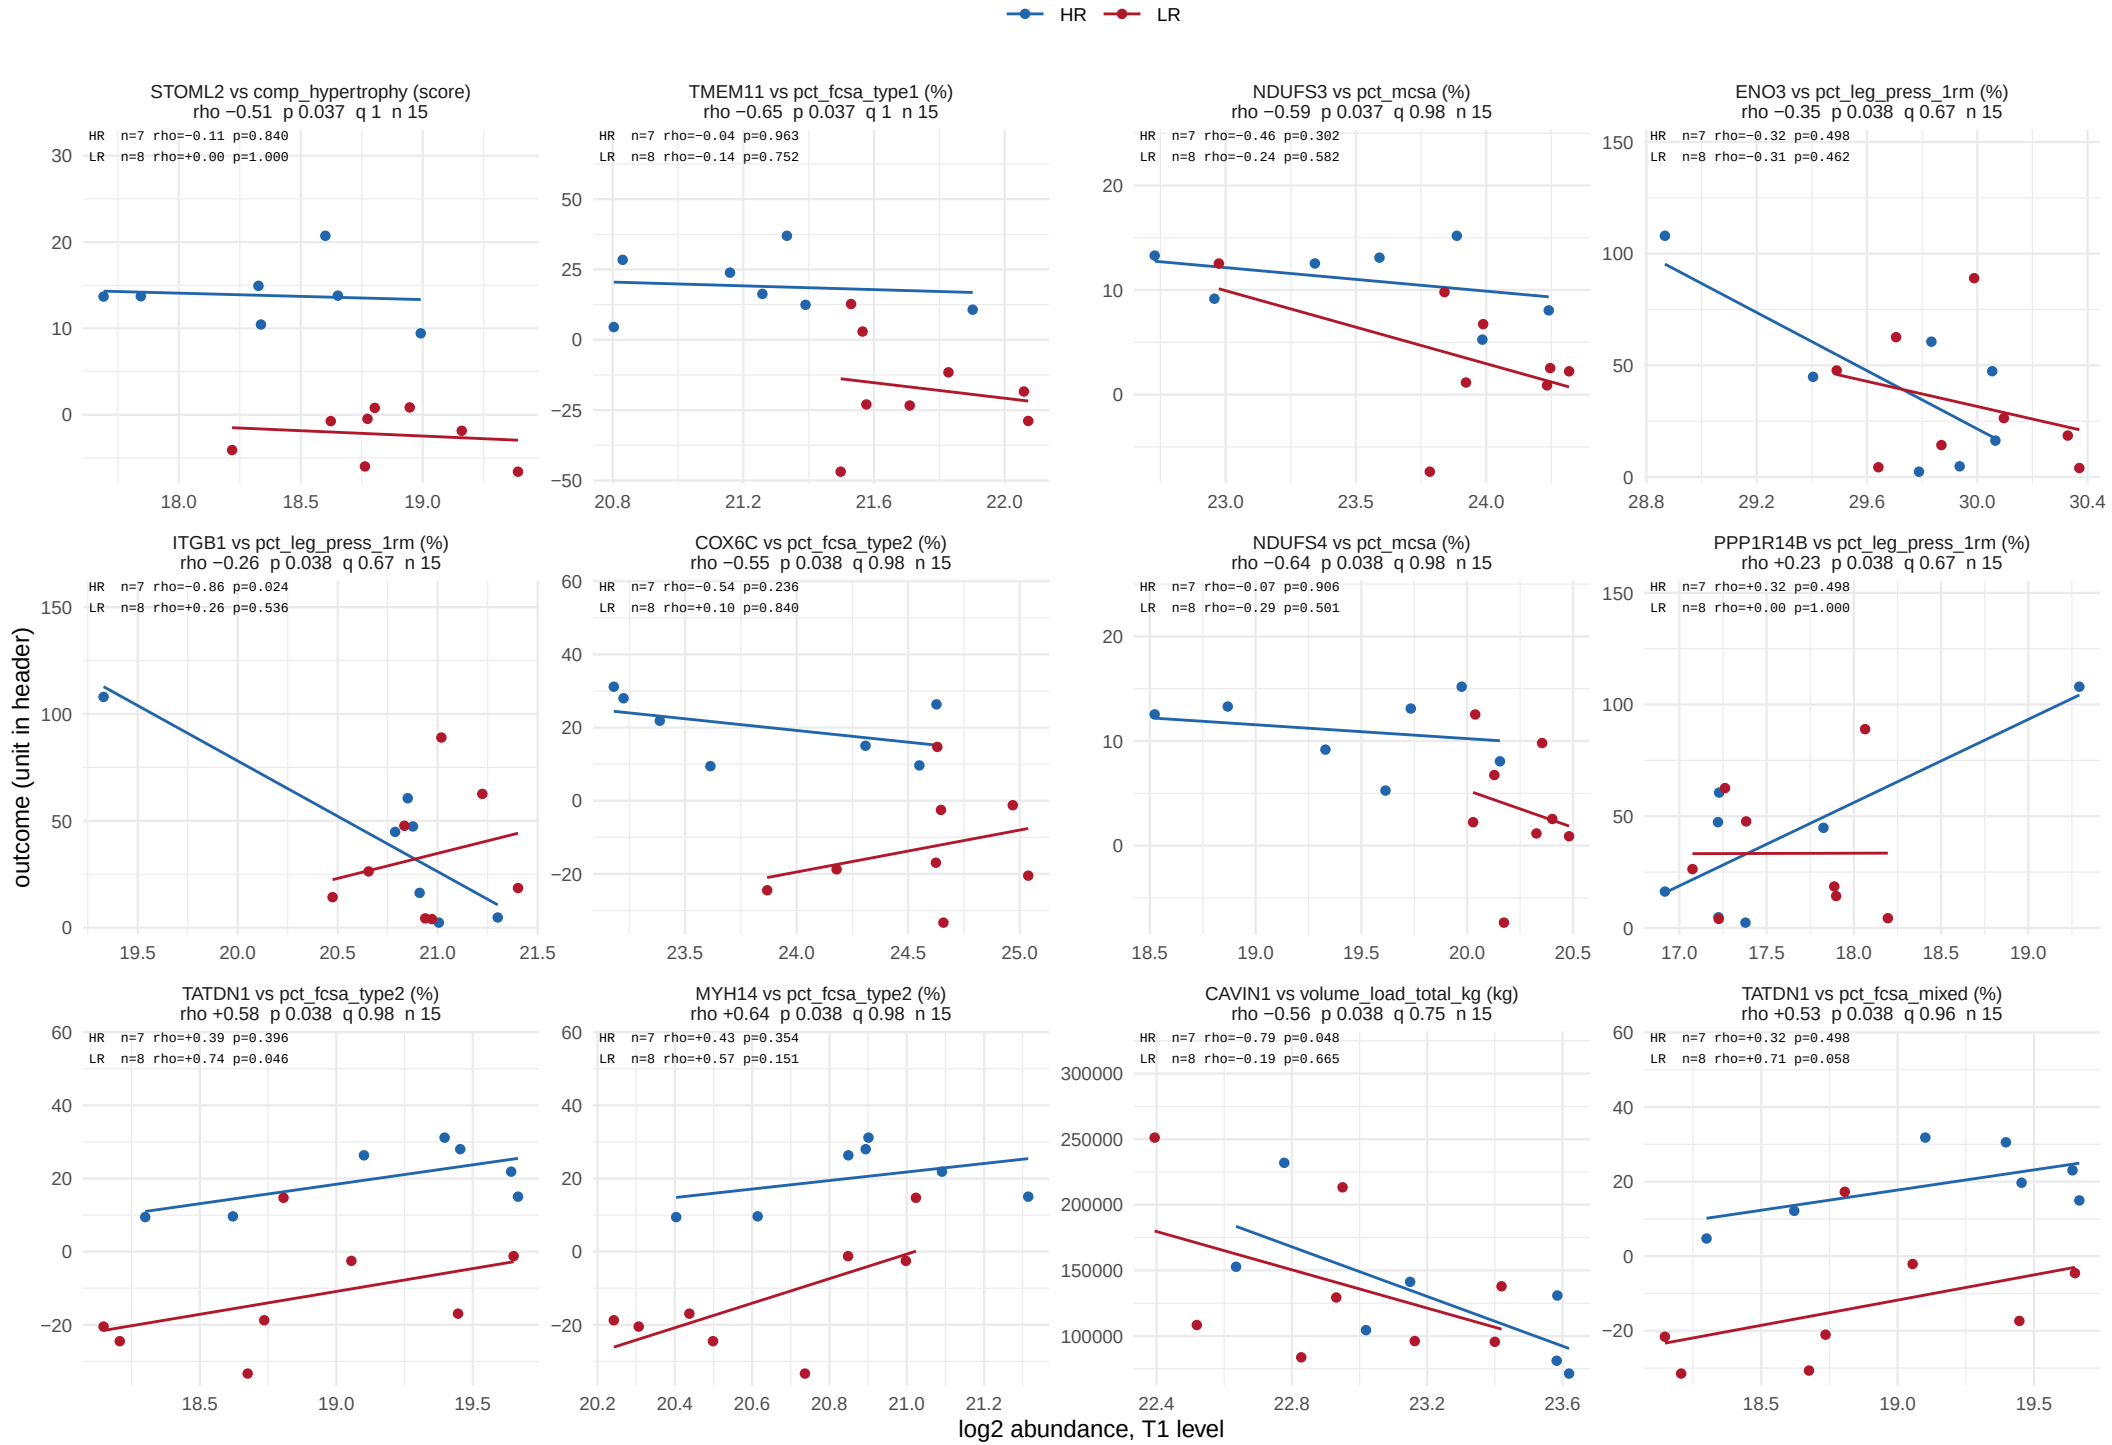

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


695 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 44 of 58.

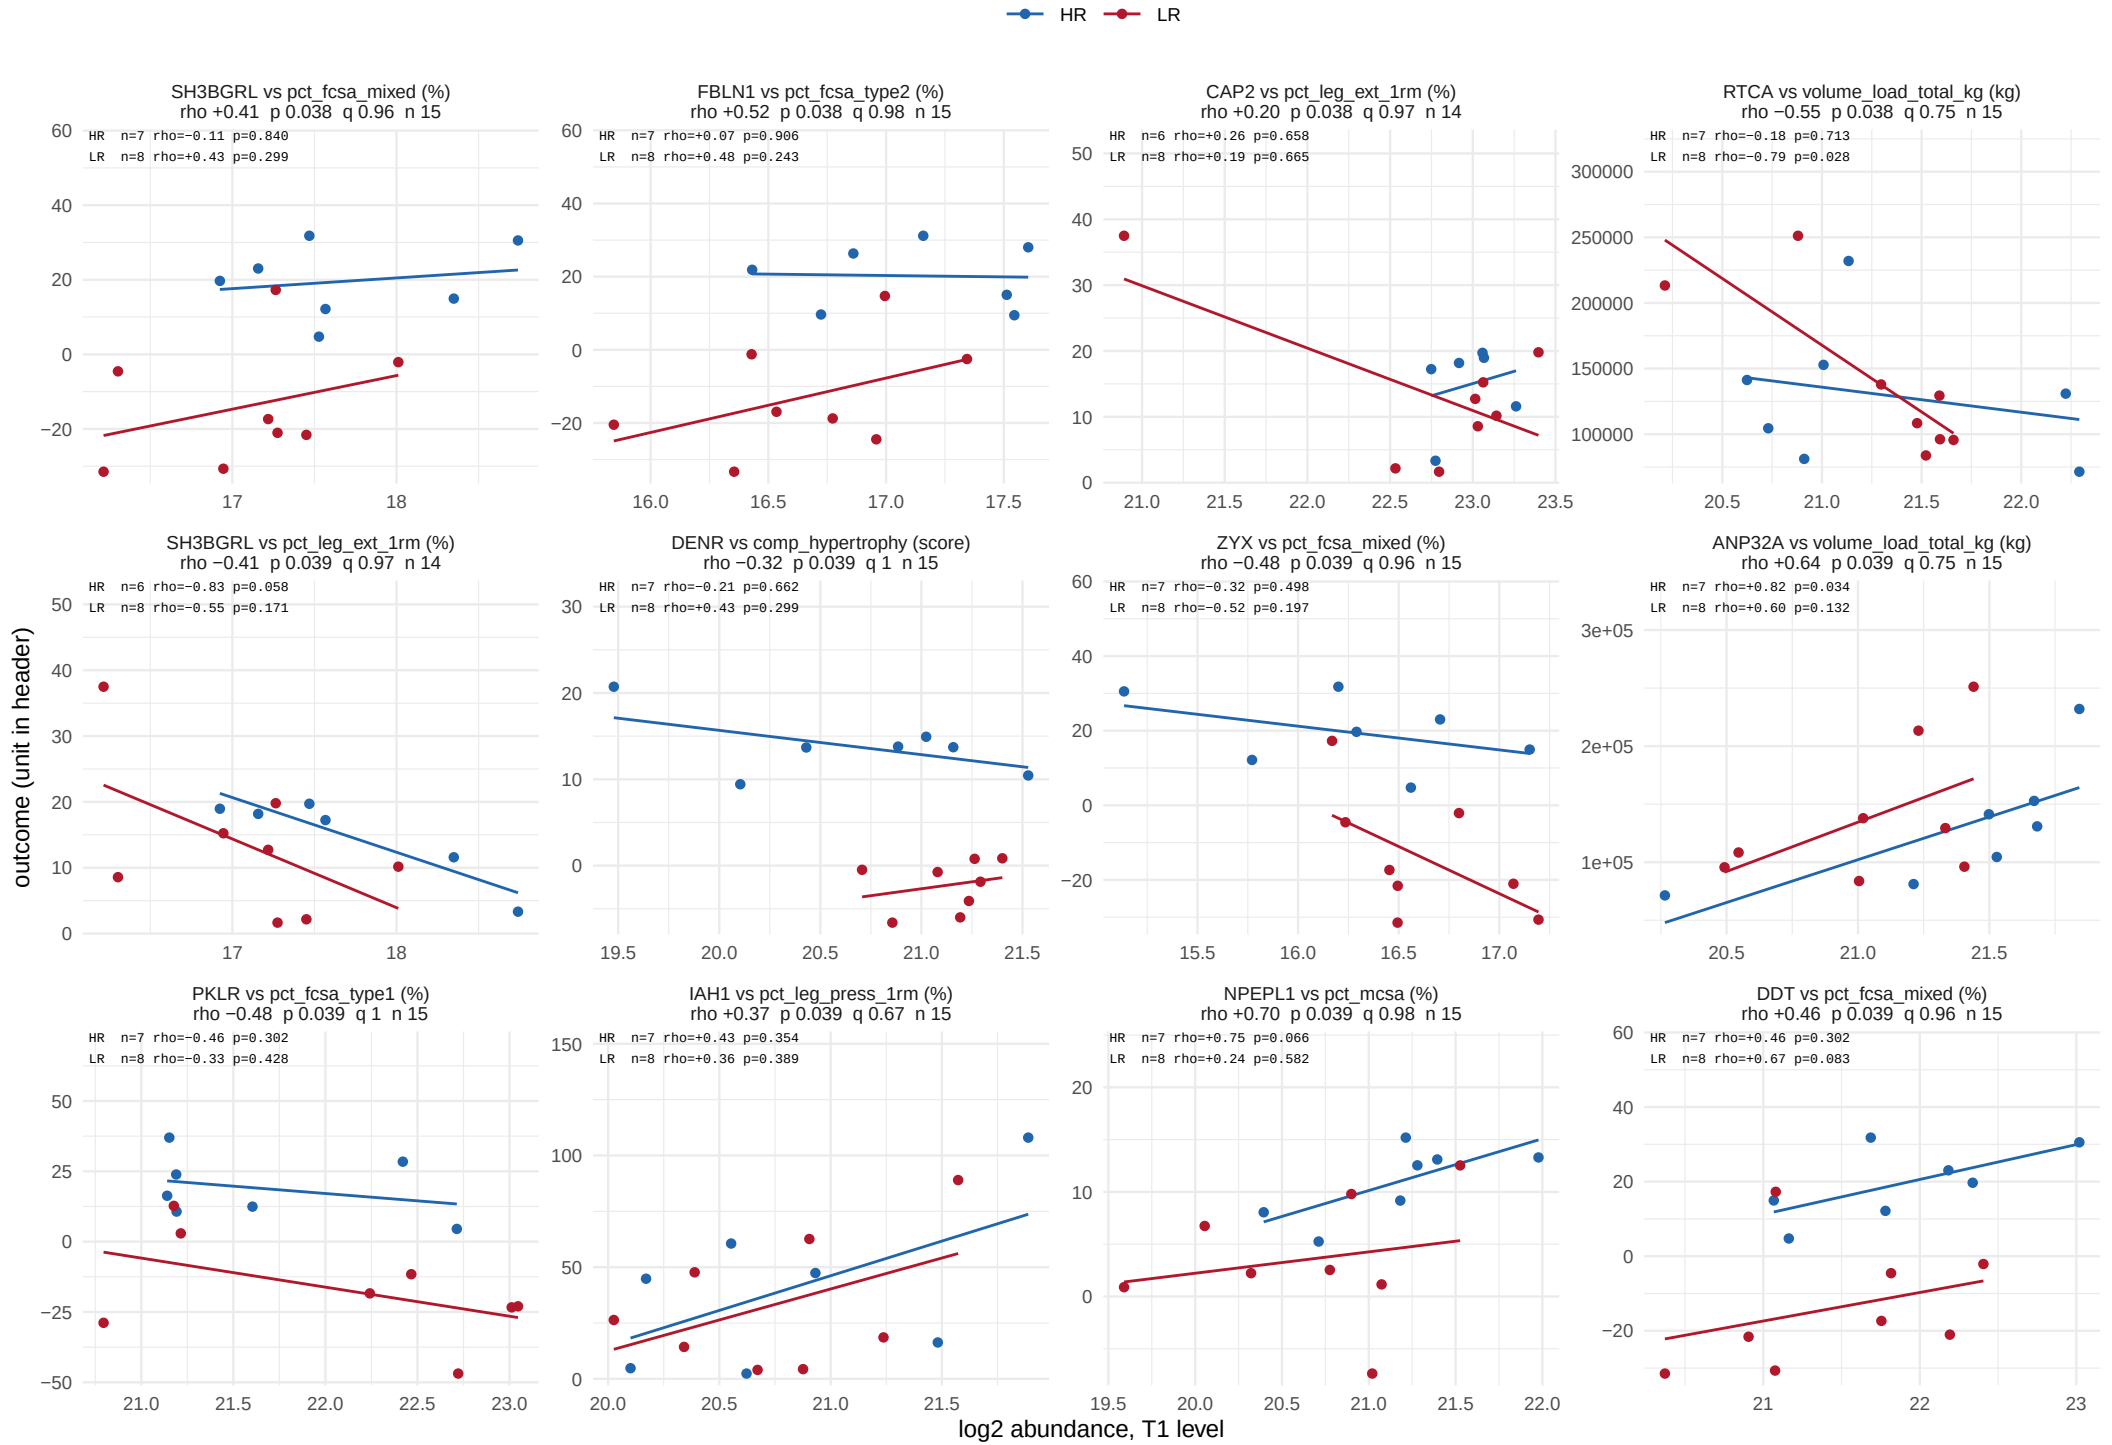

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


695 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 45 of 58.

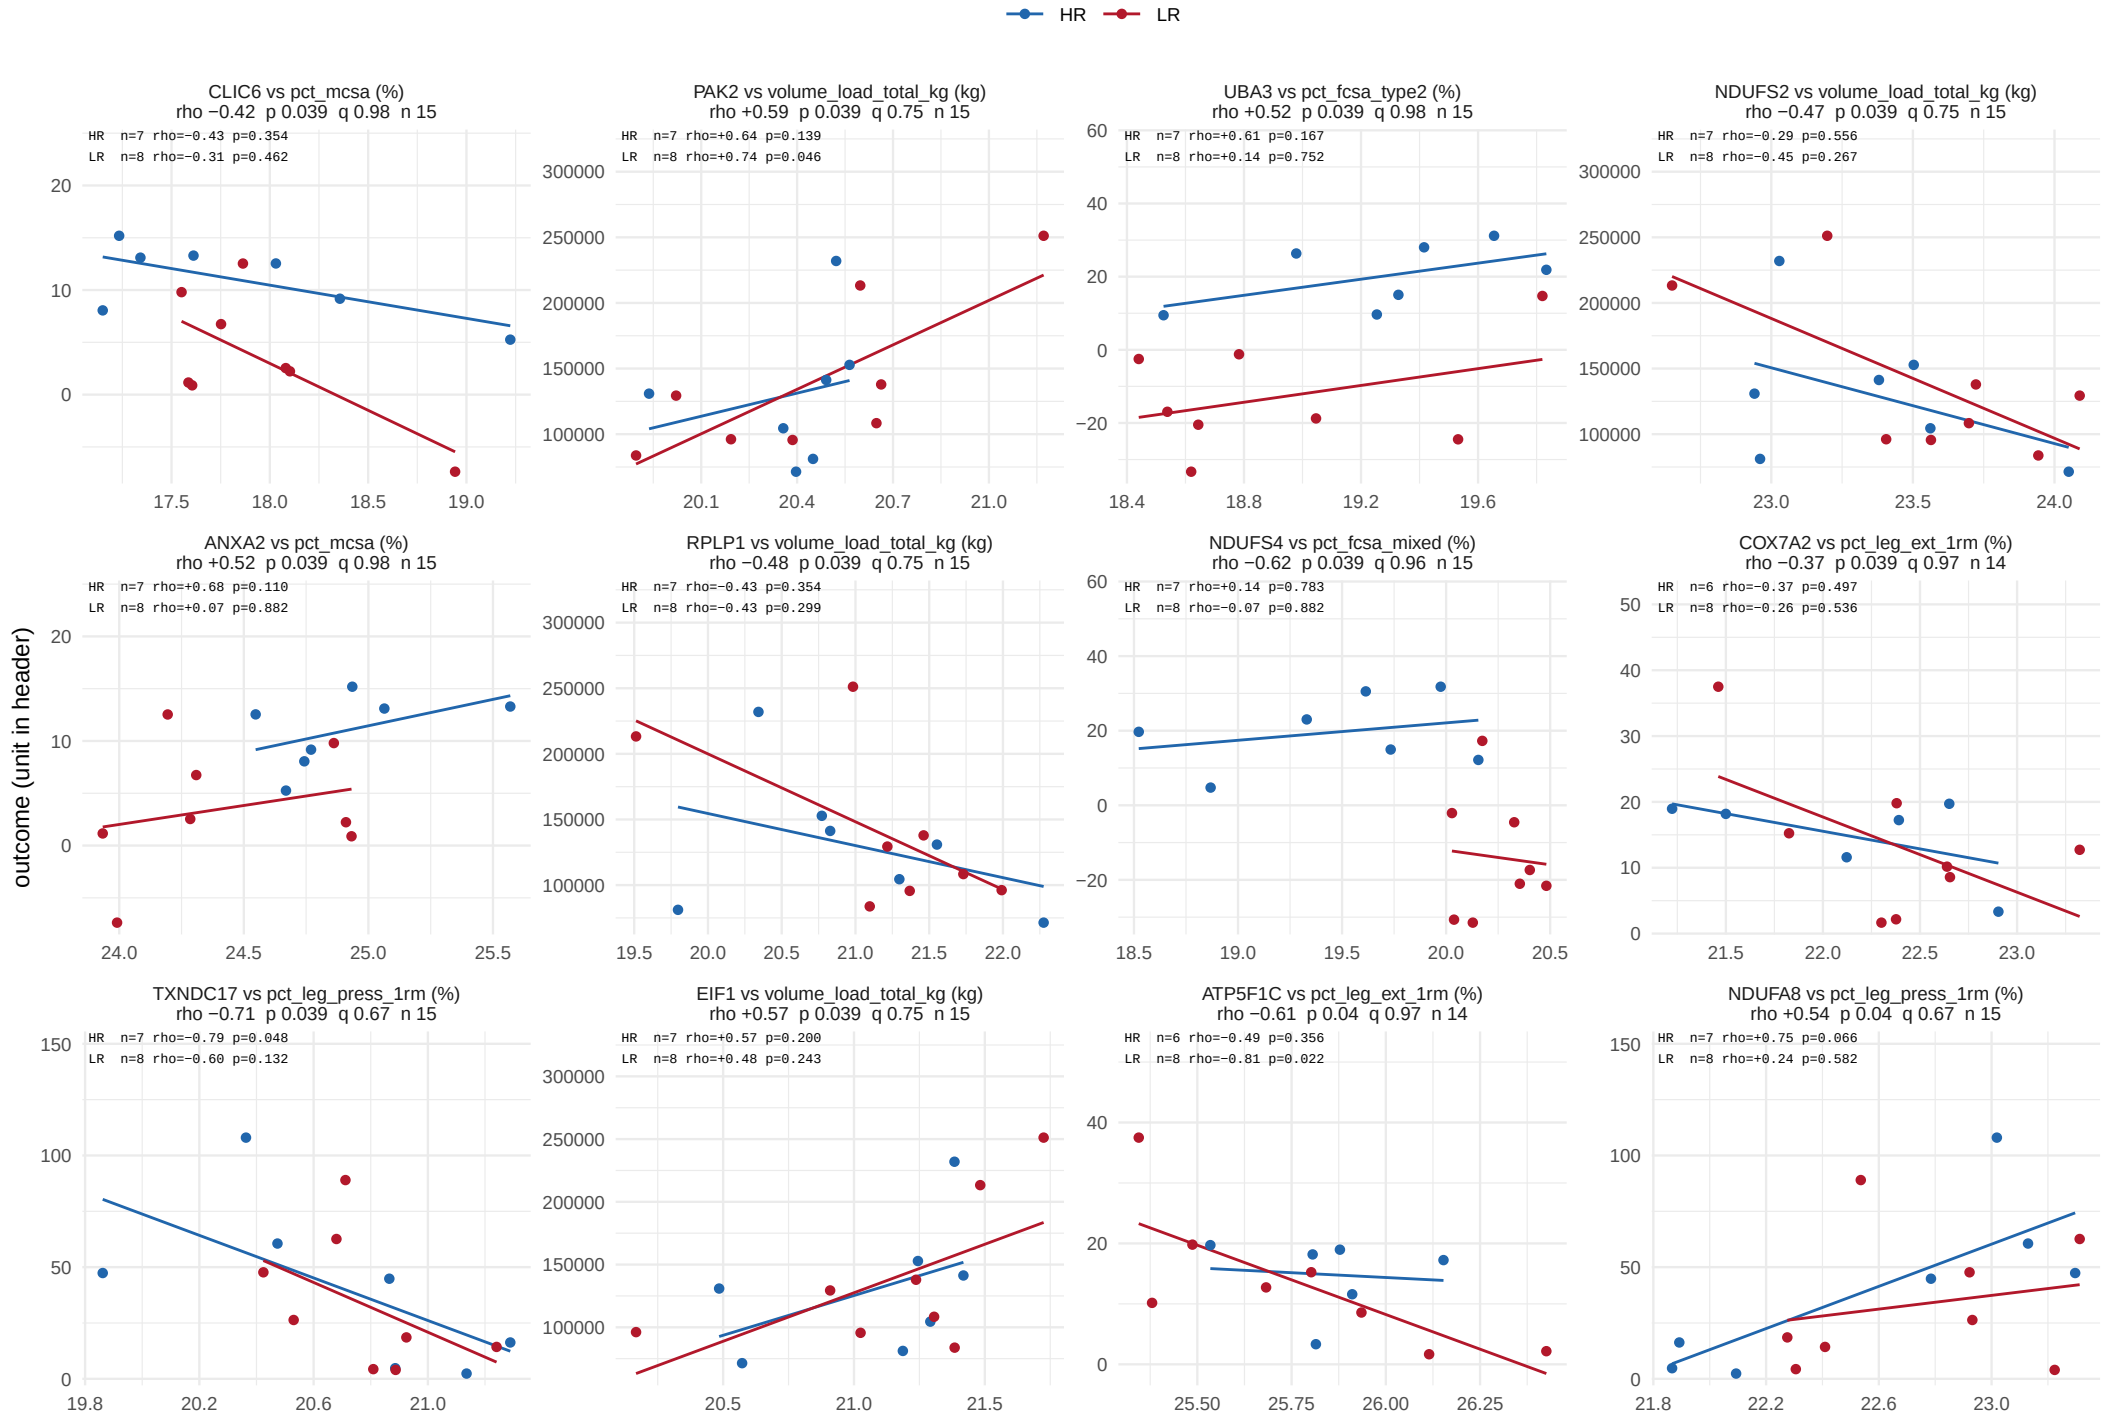

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


695 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 46 of 58.

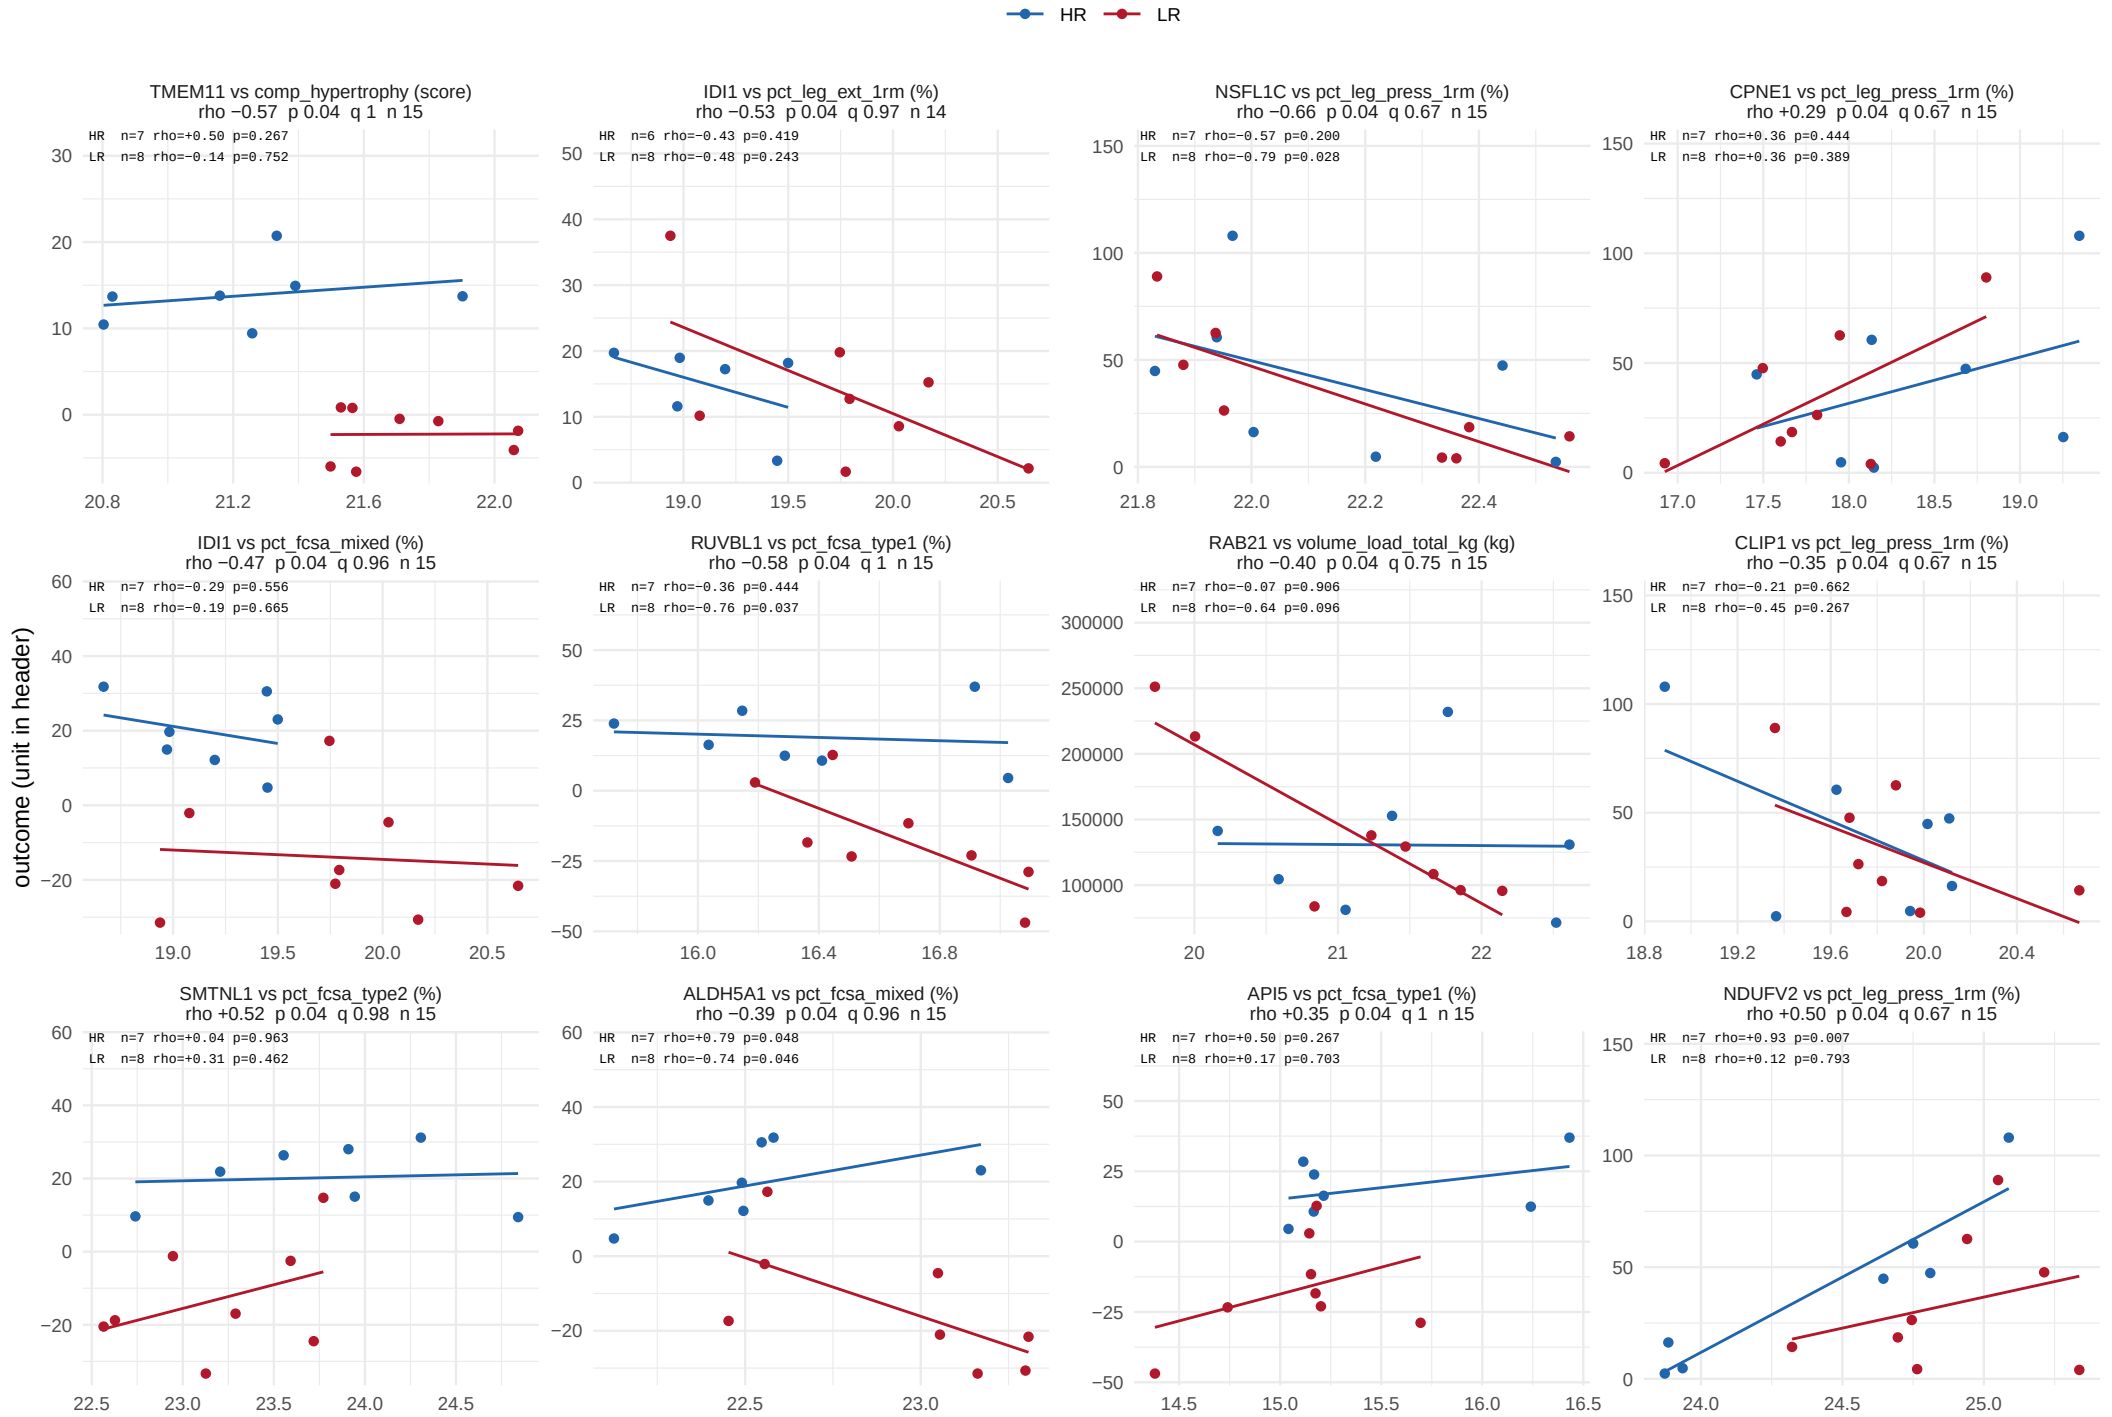

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


695 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 47 of 58.

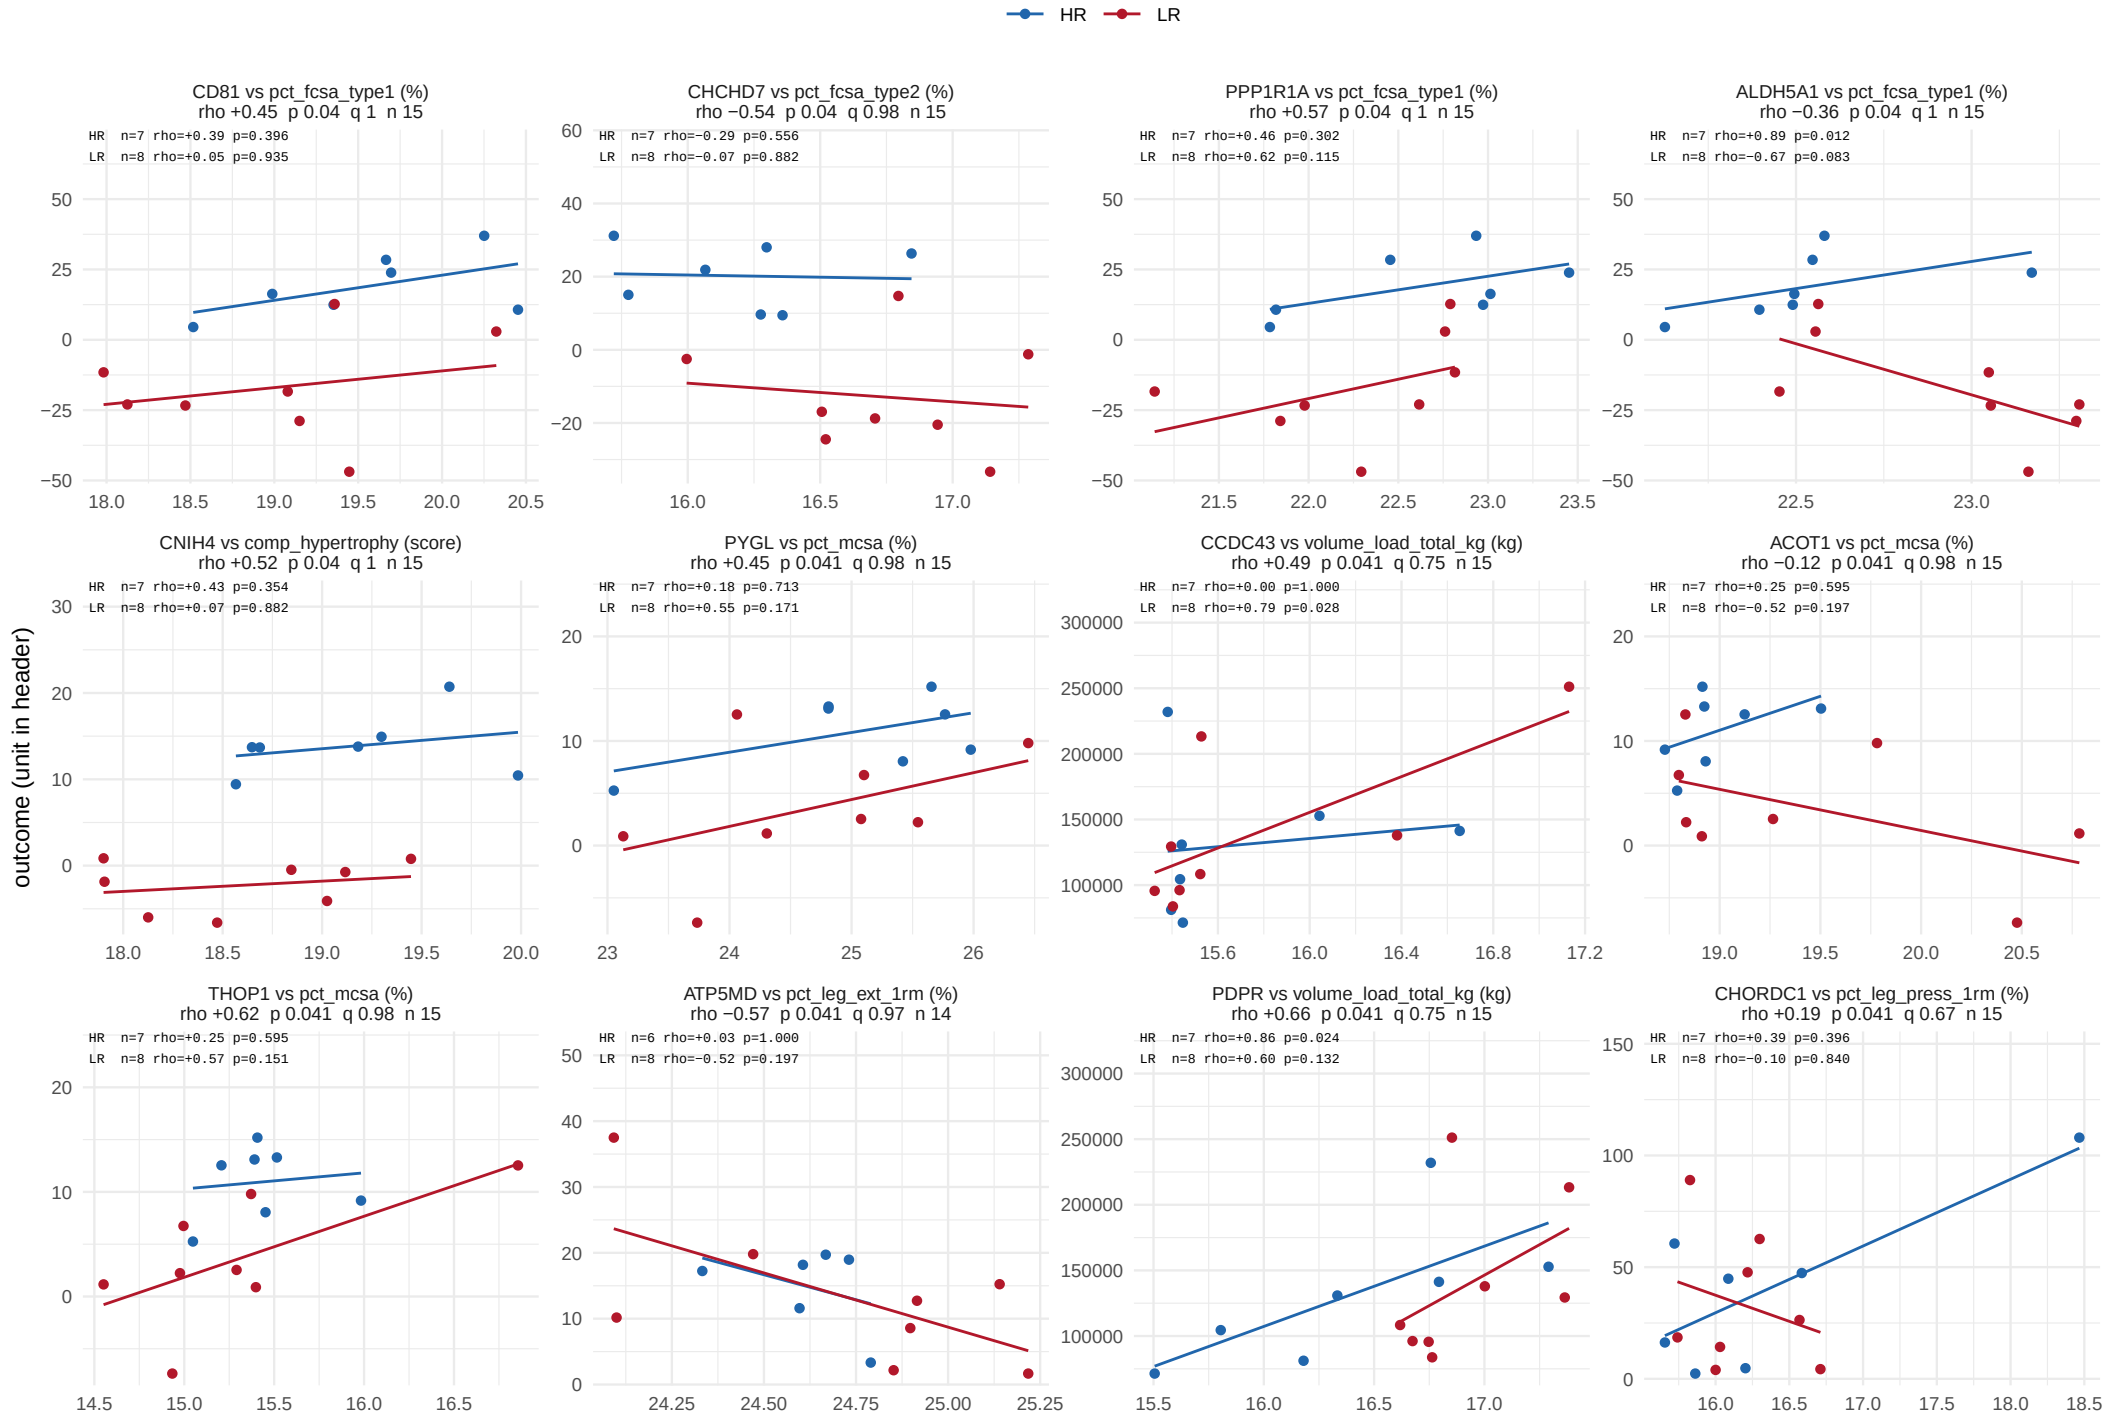

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


695 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 48 of 58.

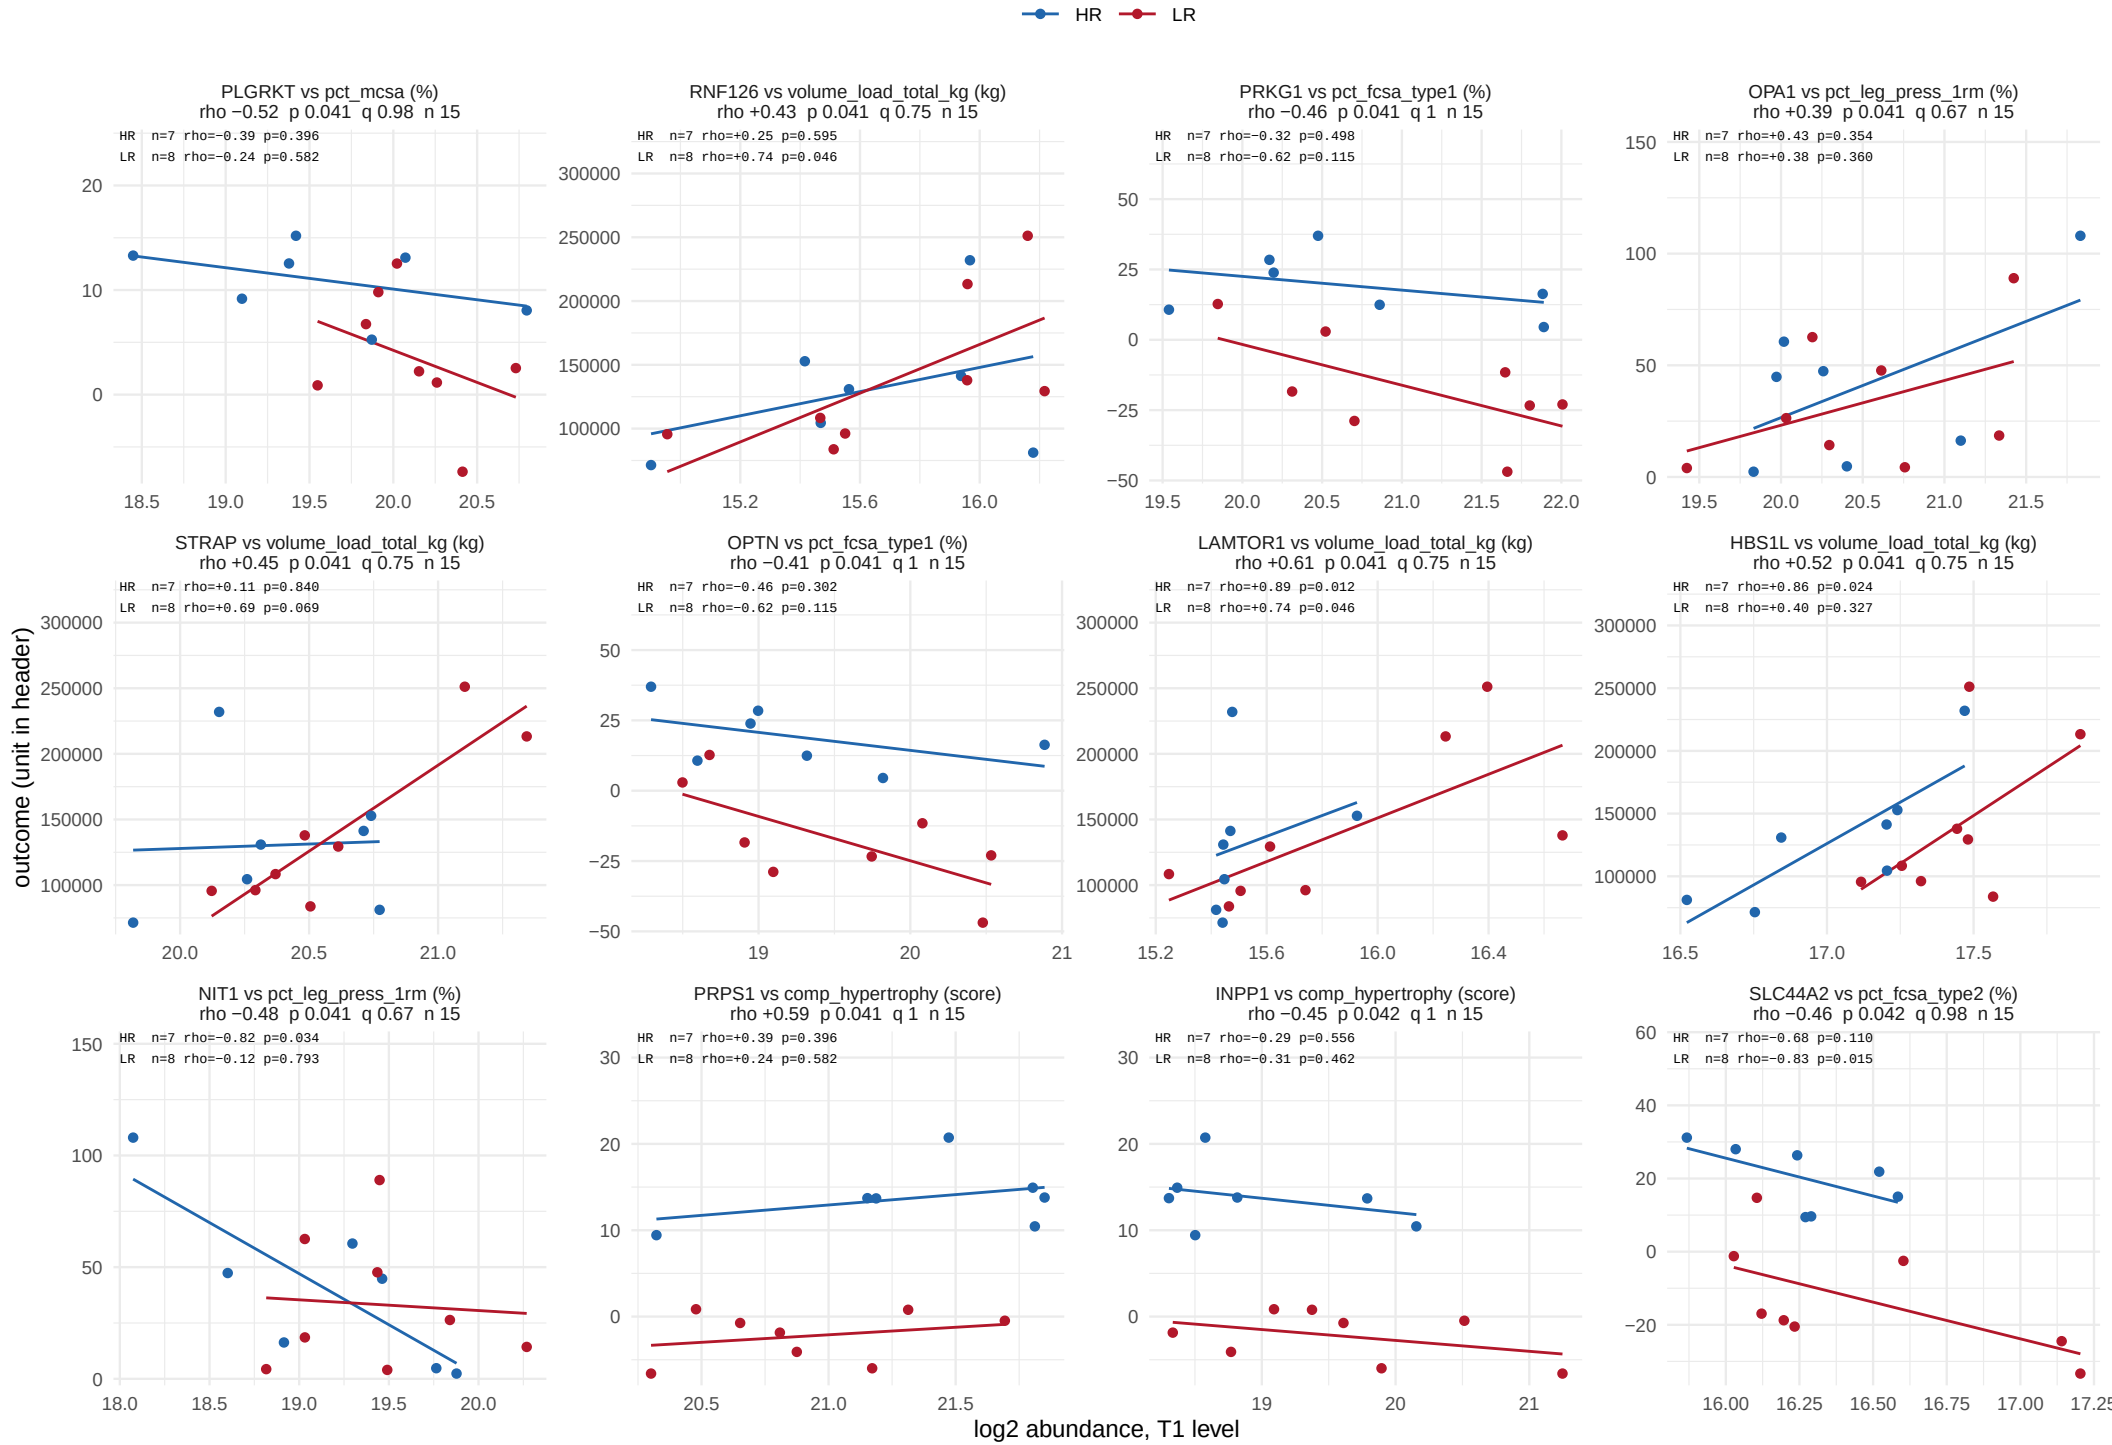

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window

695 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 49 of 58.

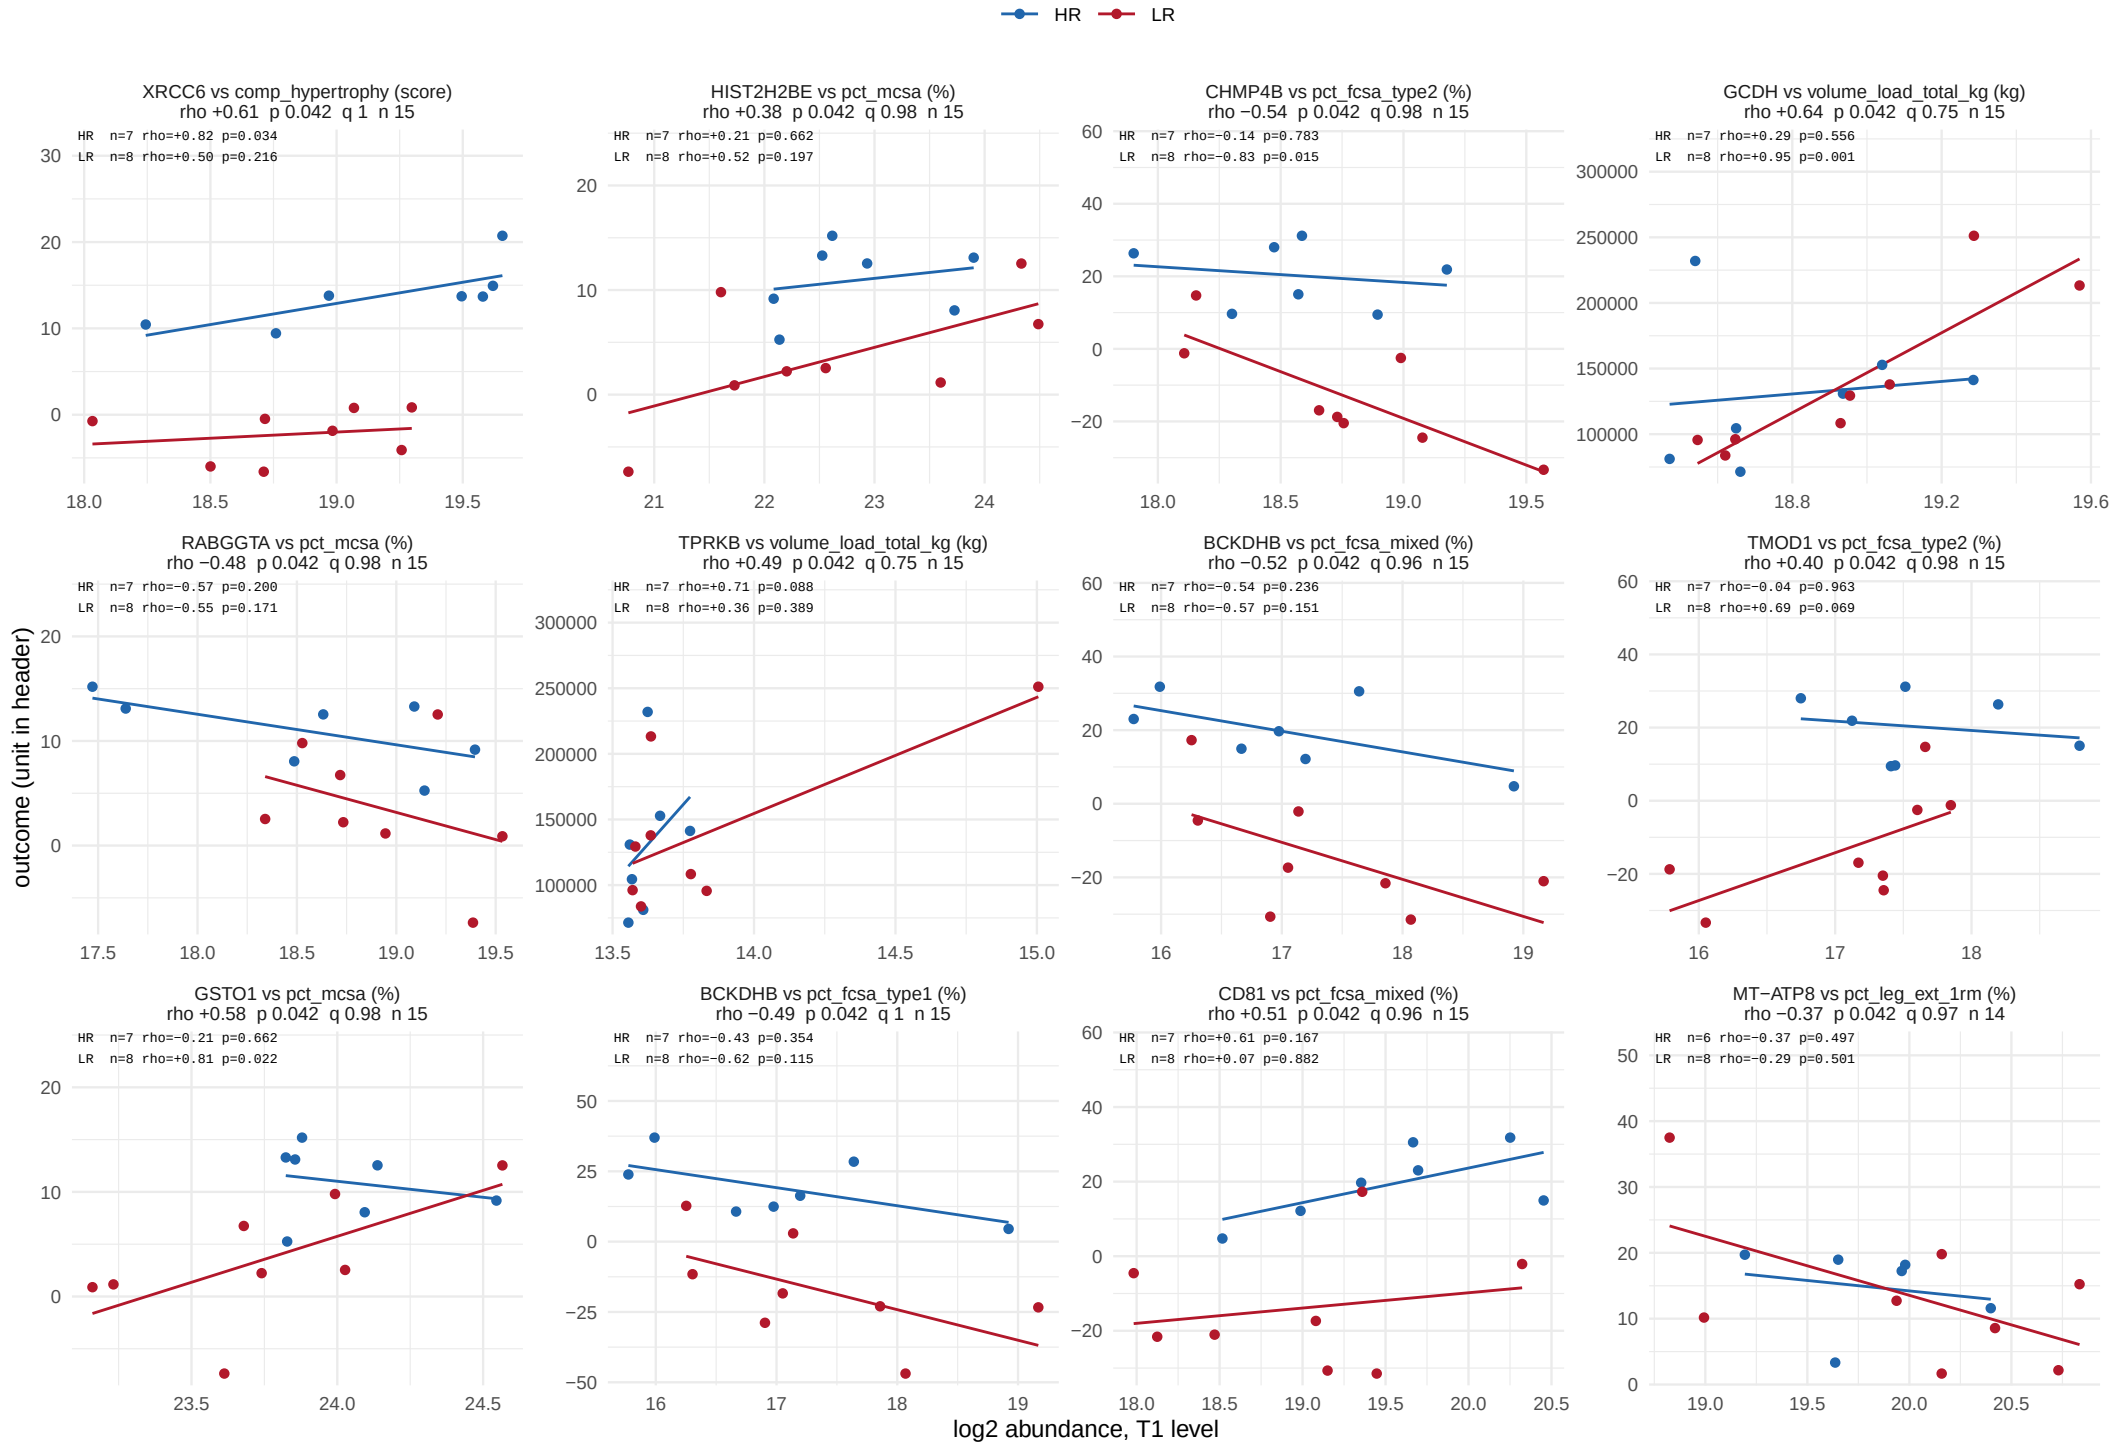

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


695 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 50 of 58.



One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


695 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 51 of 58.

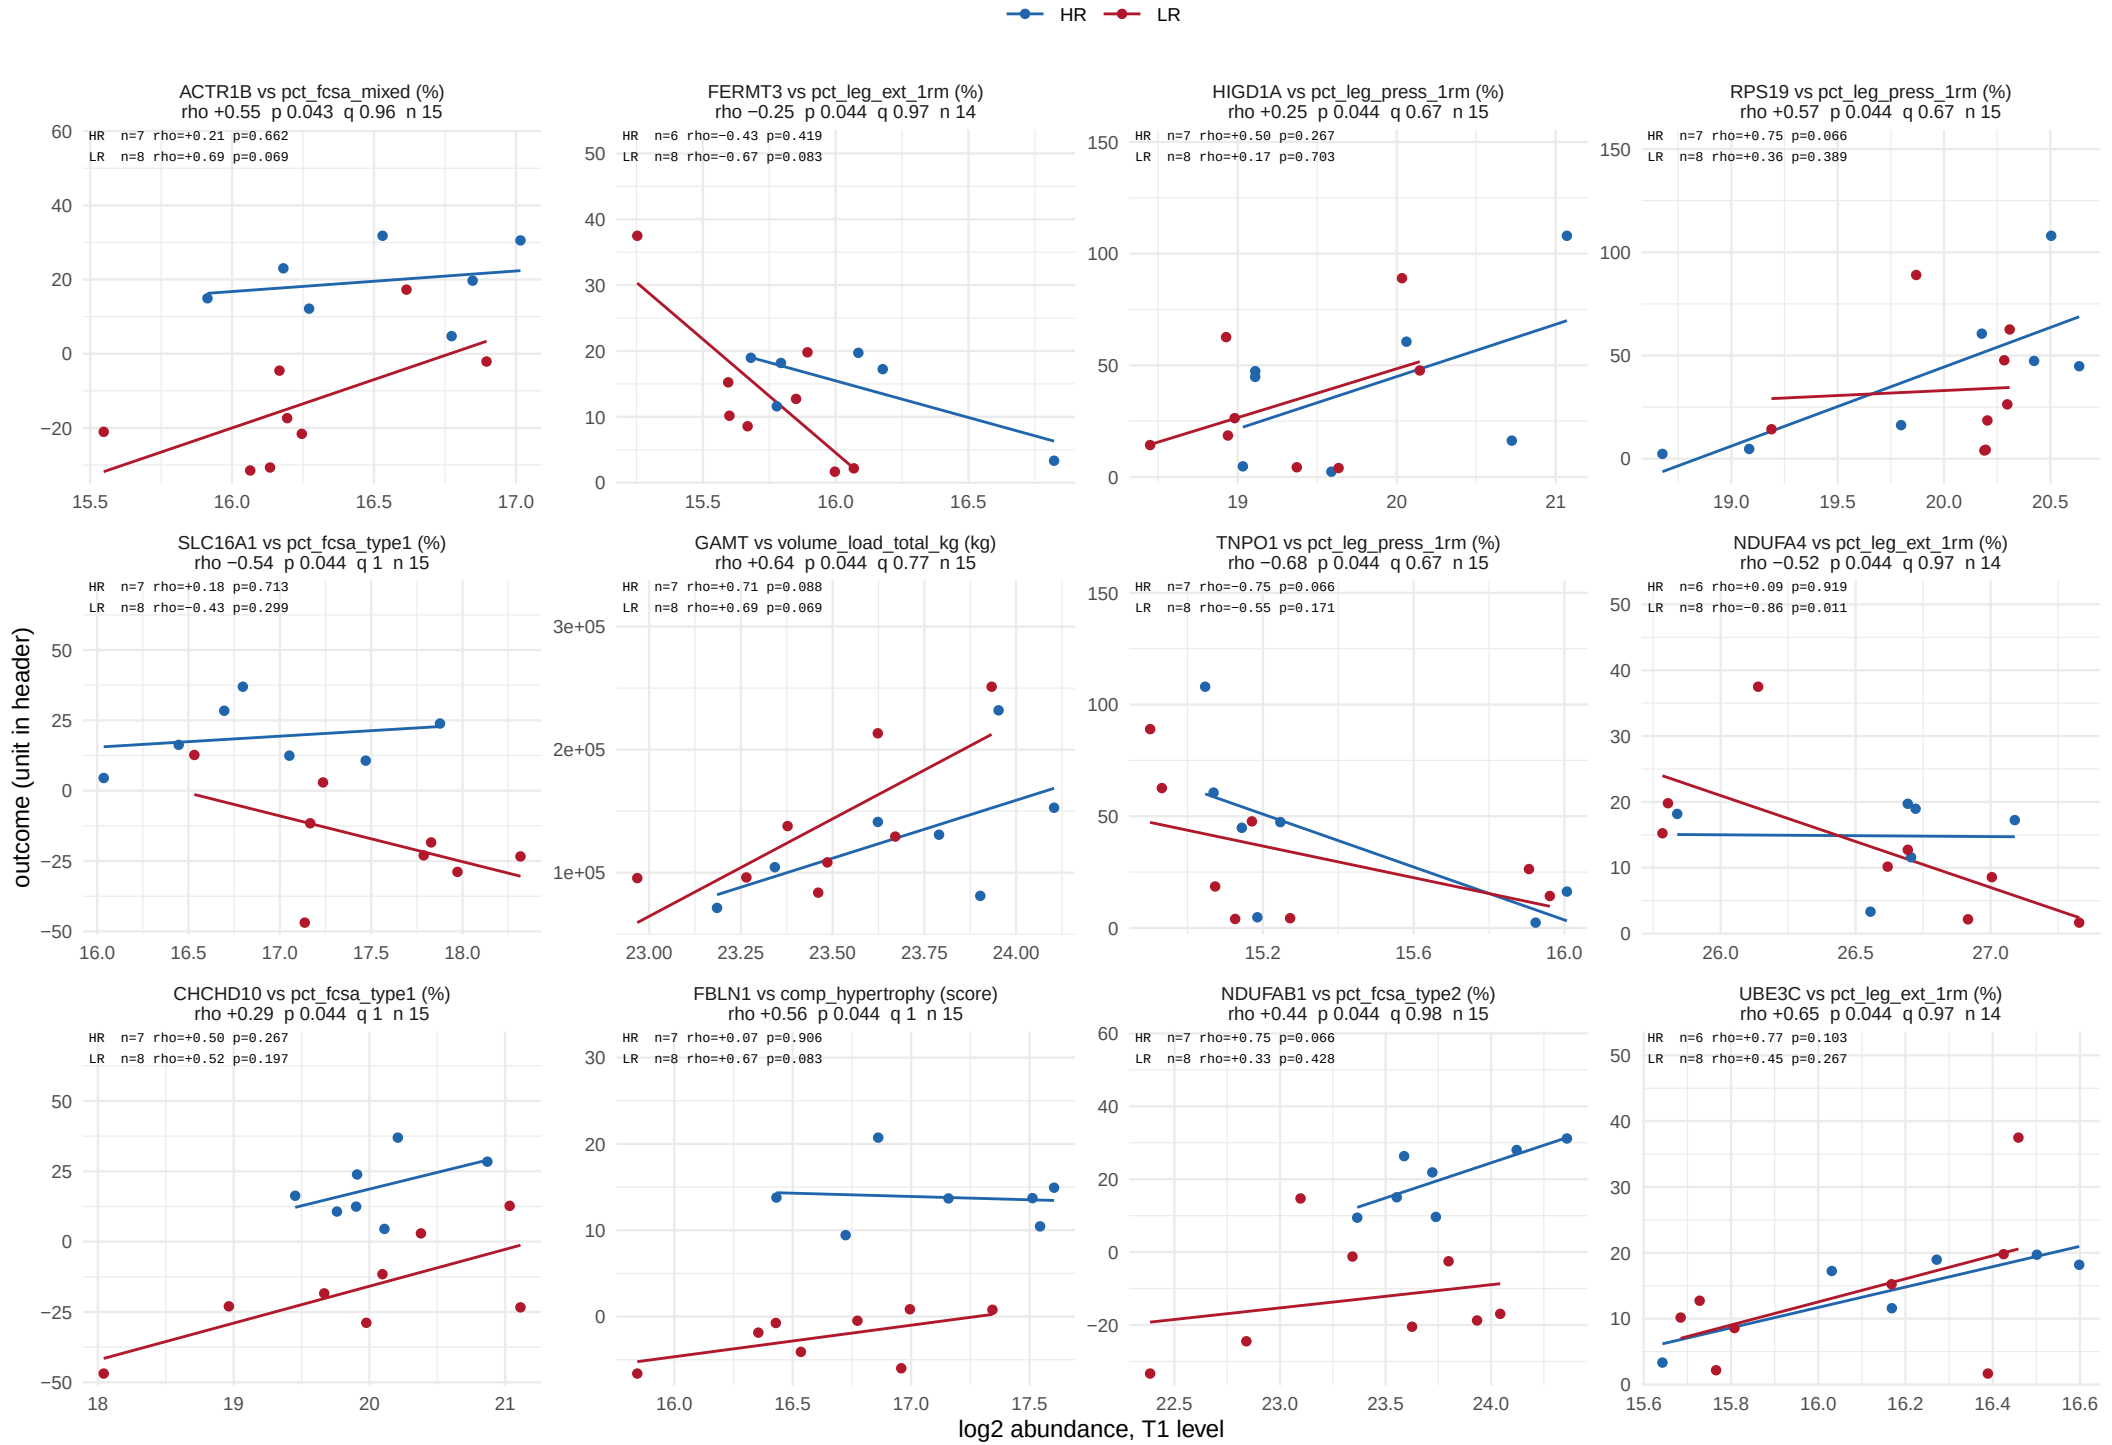

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


695 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 52 of 58.

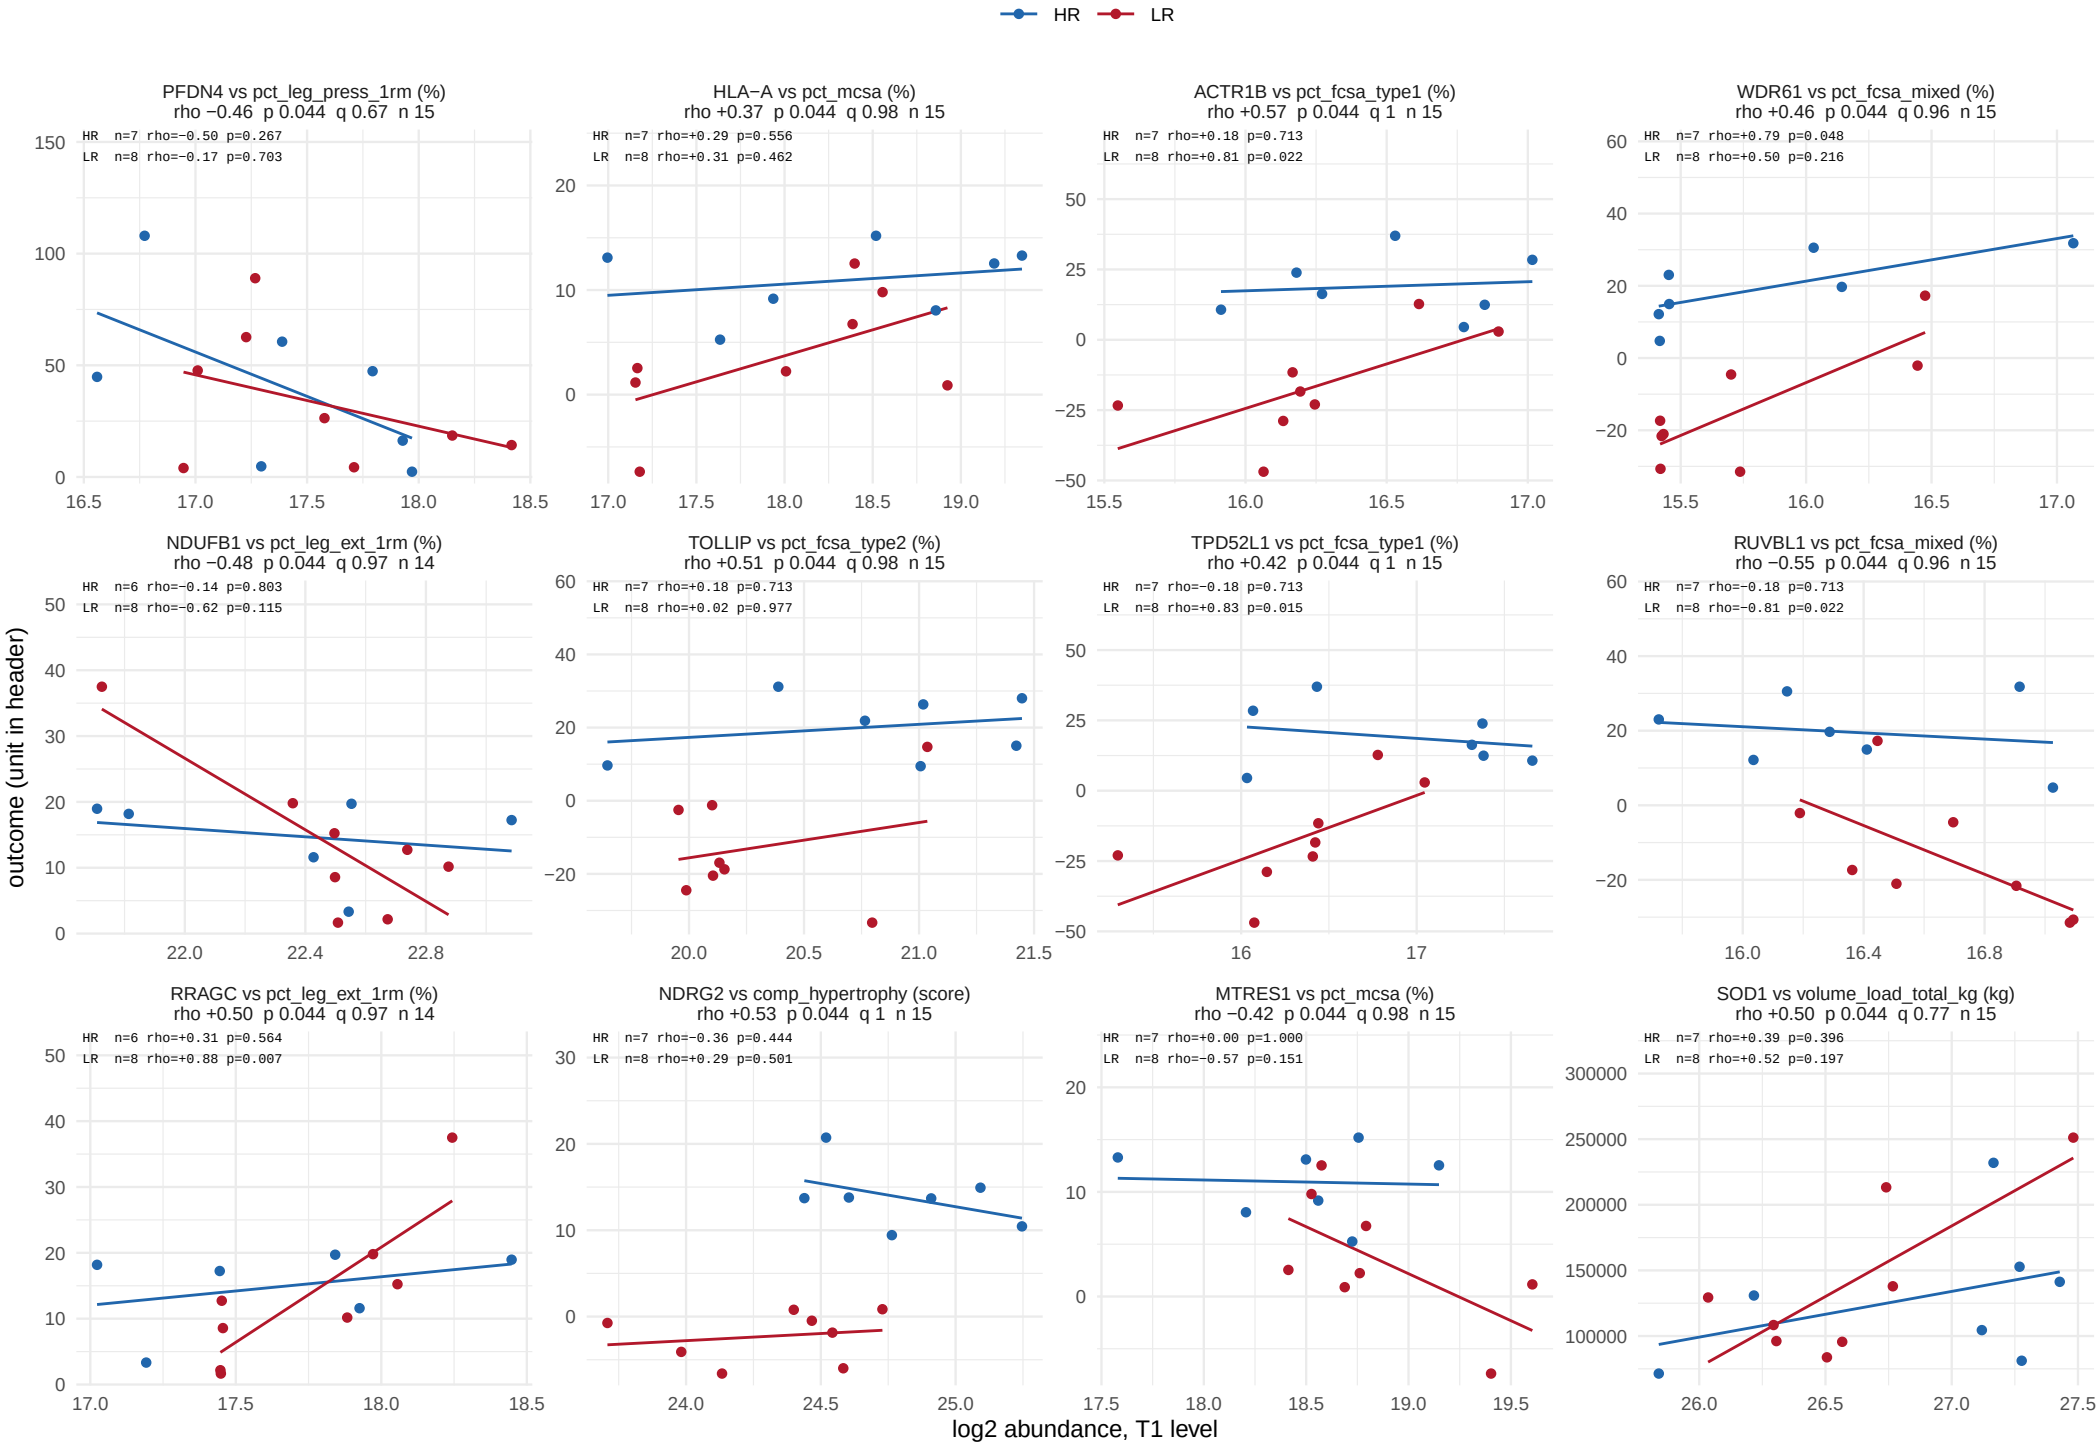

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


695 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 53 of 58.

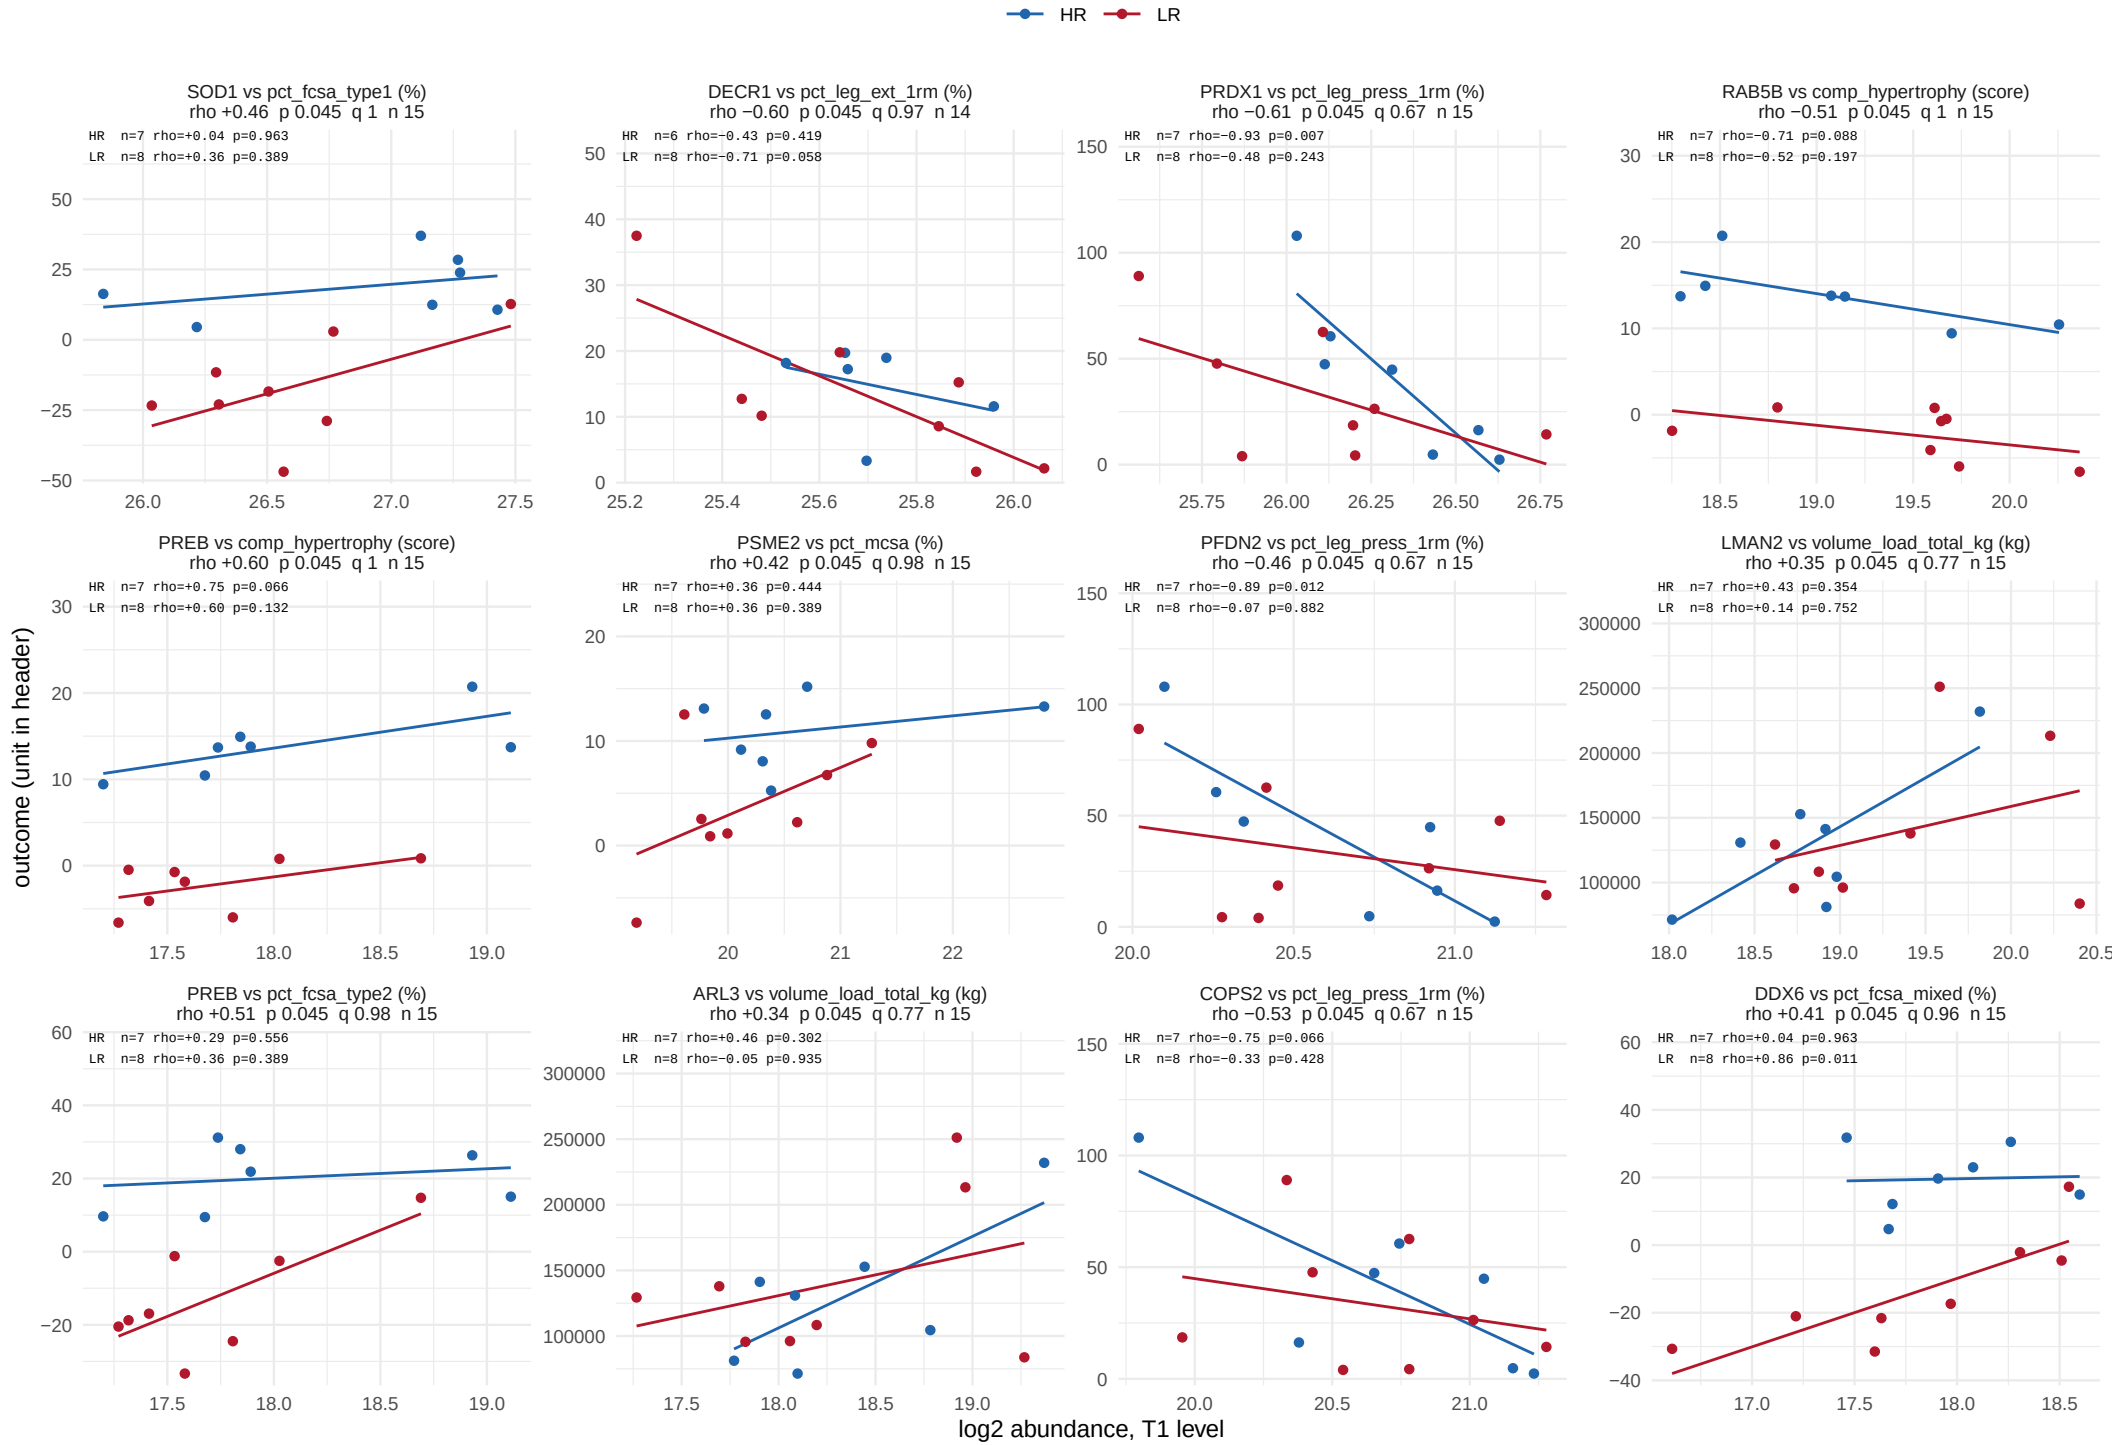

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


695 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 54 of 58.

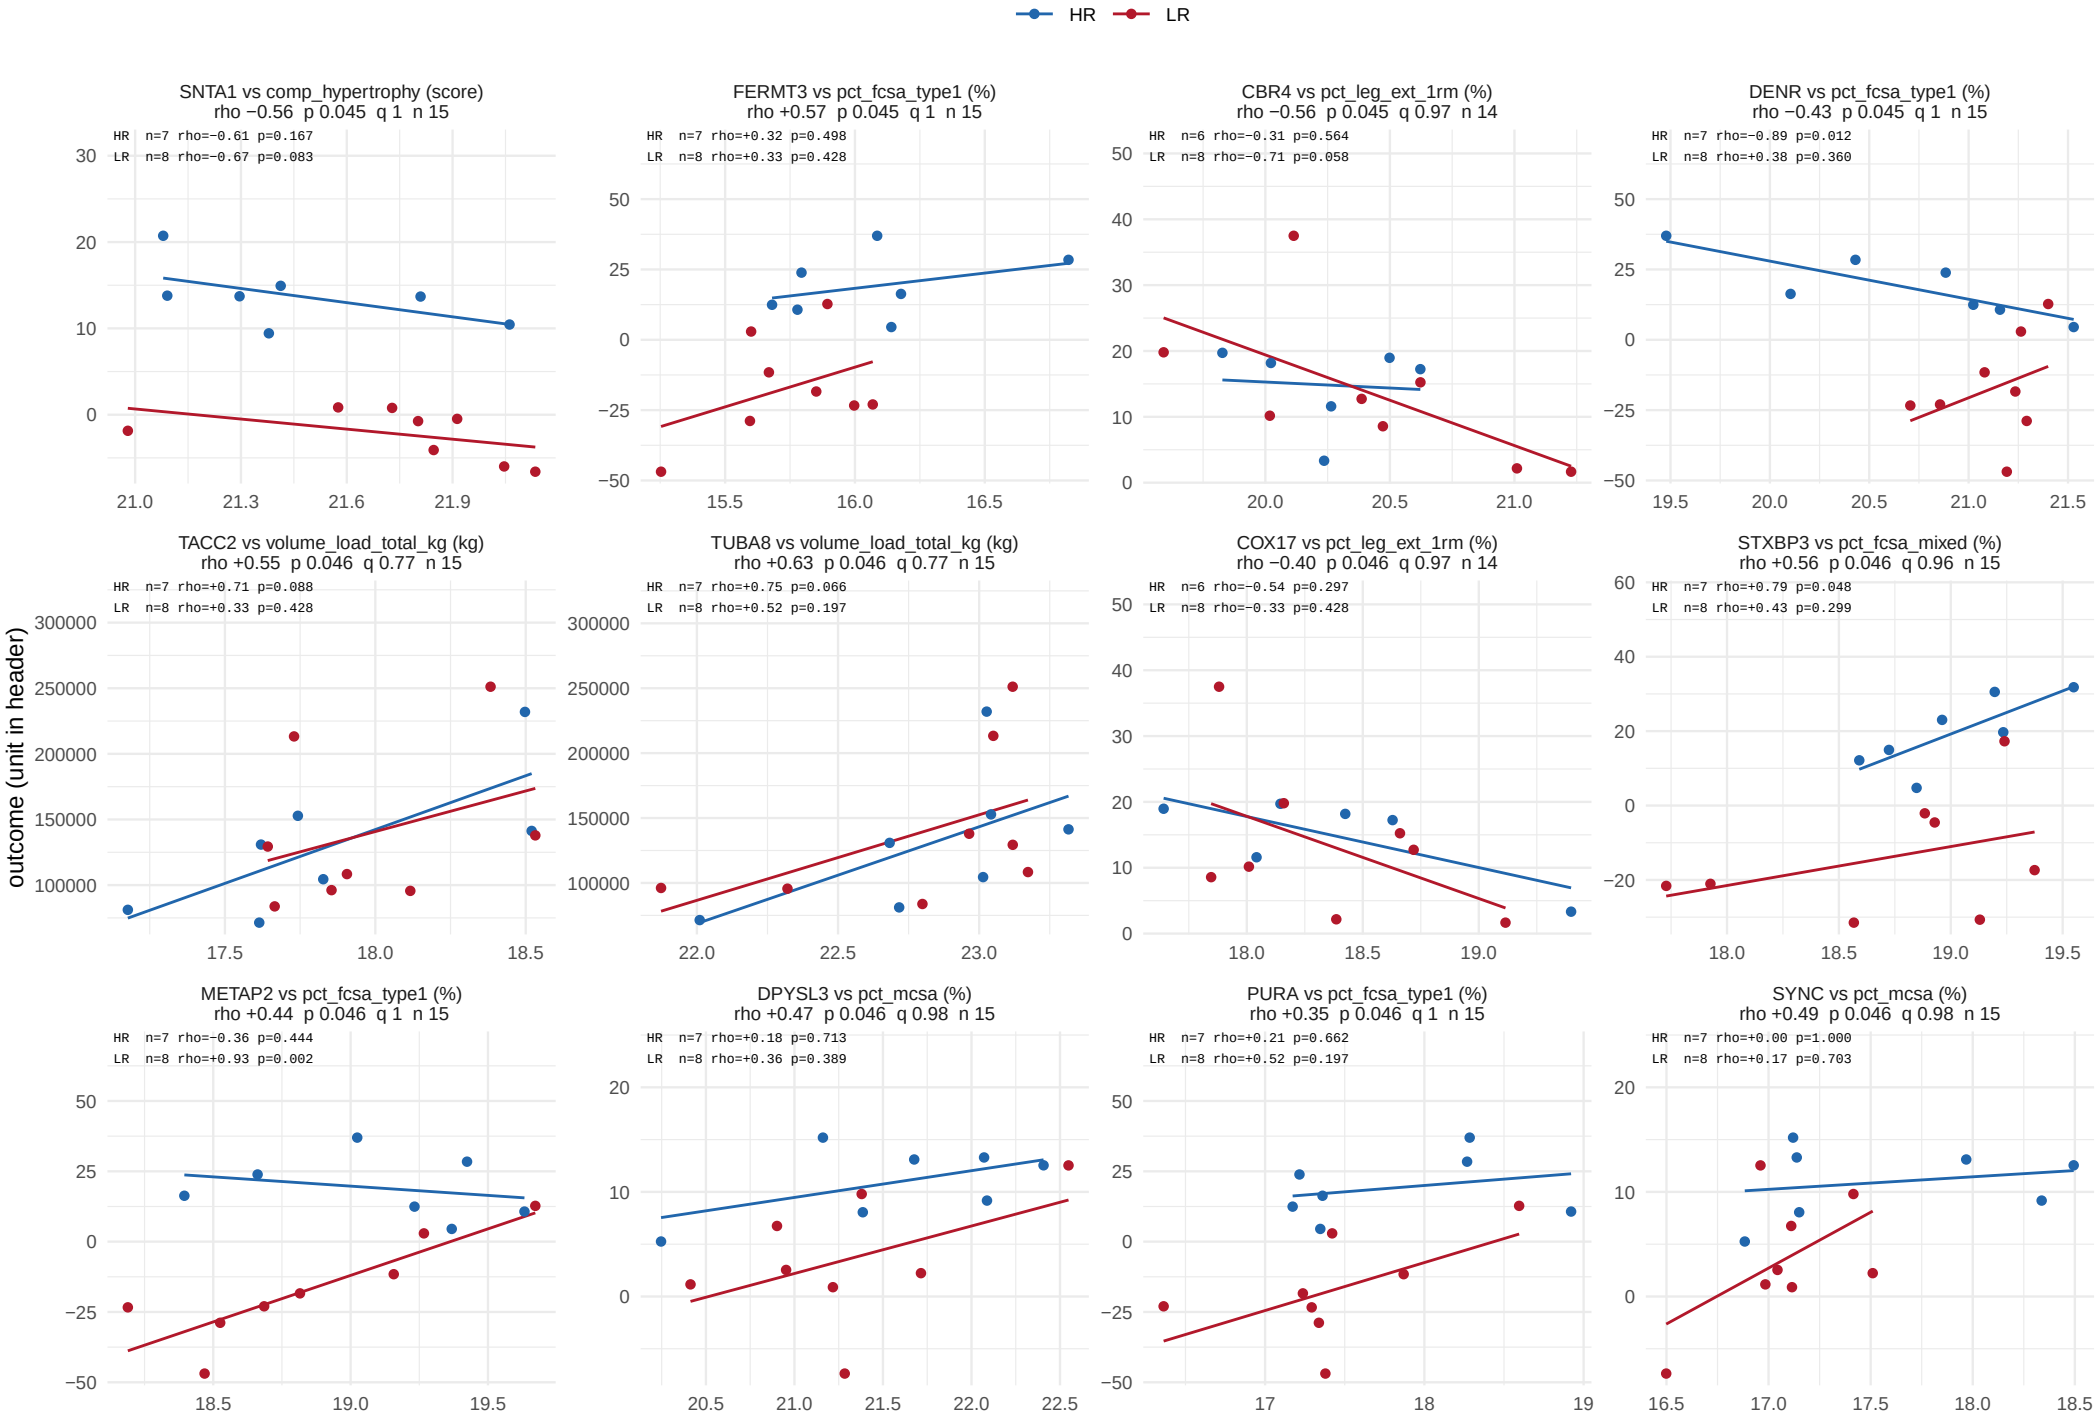

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


695 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 55 of 58.

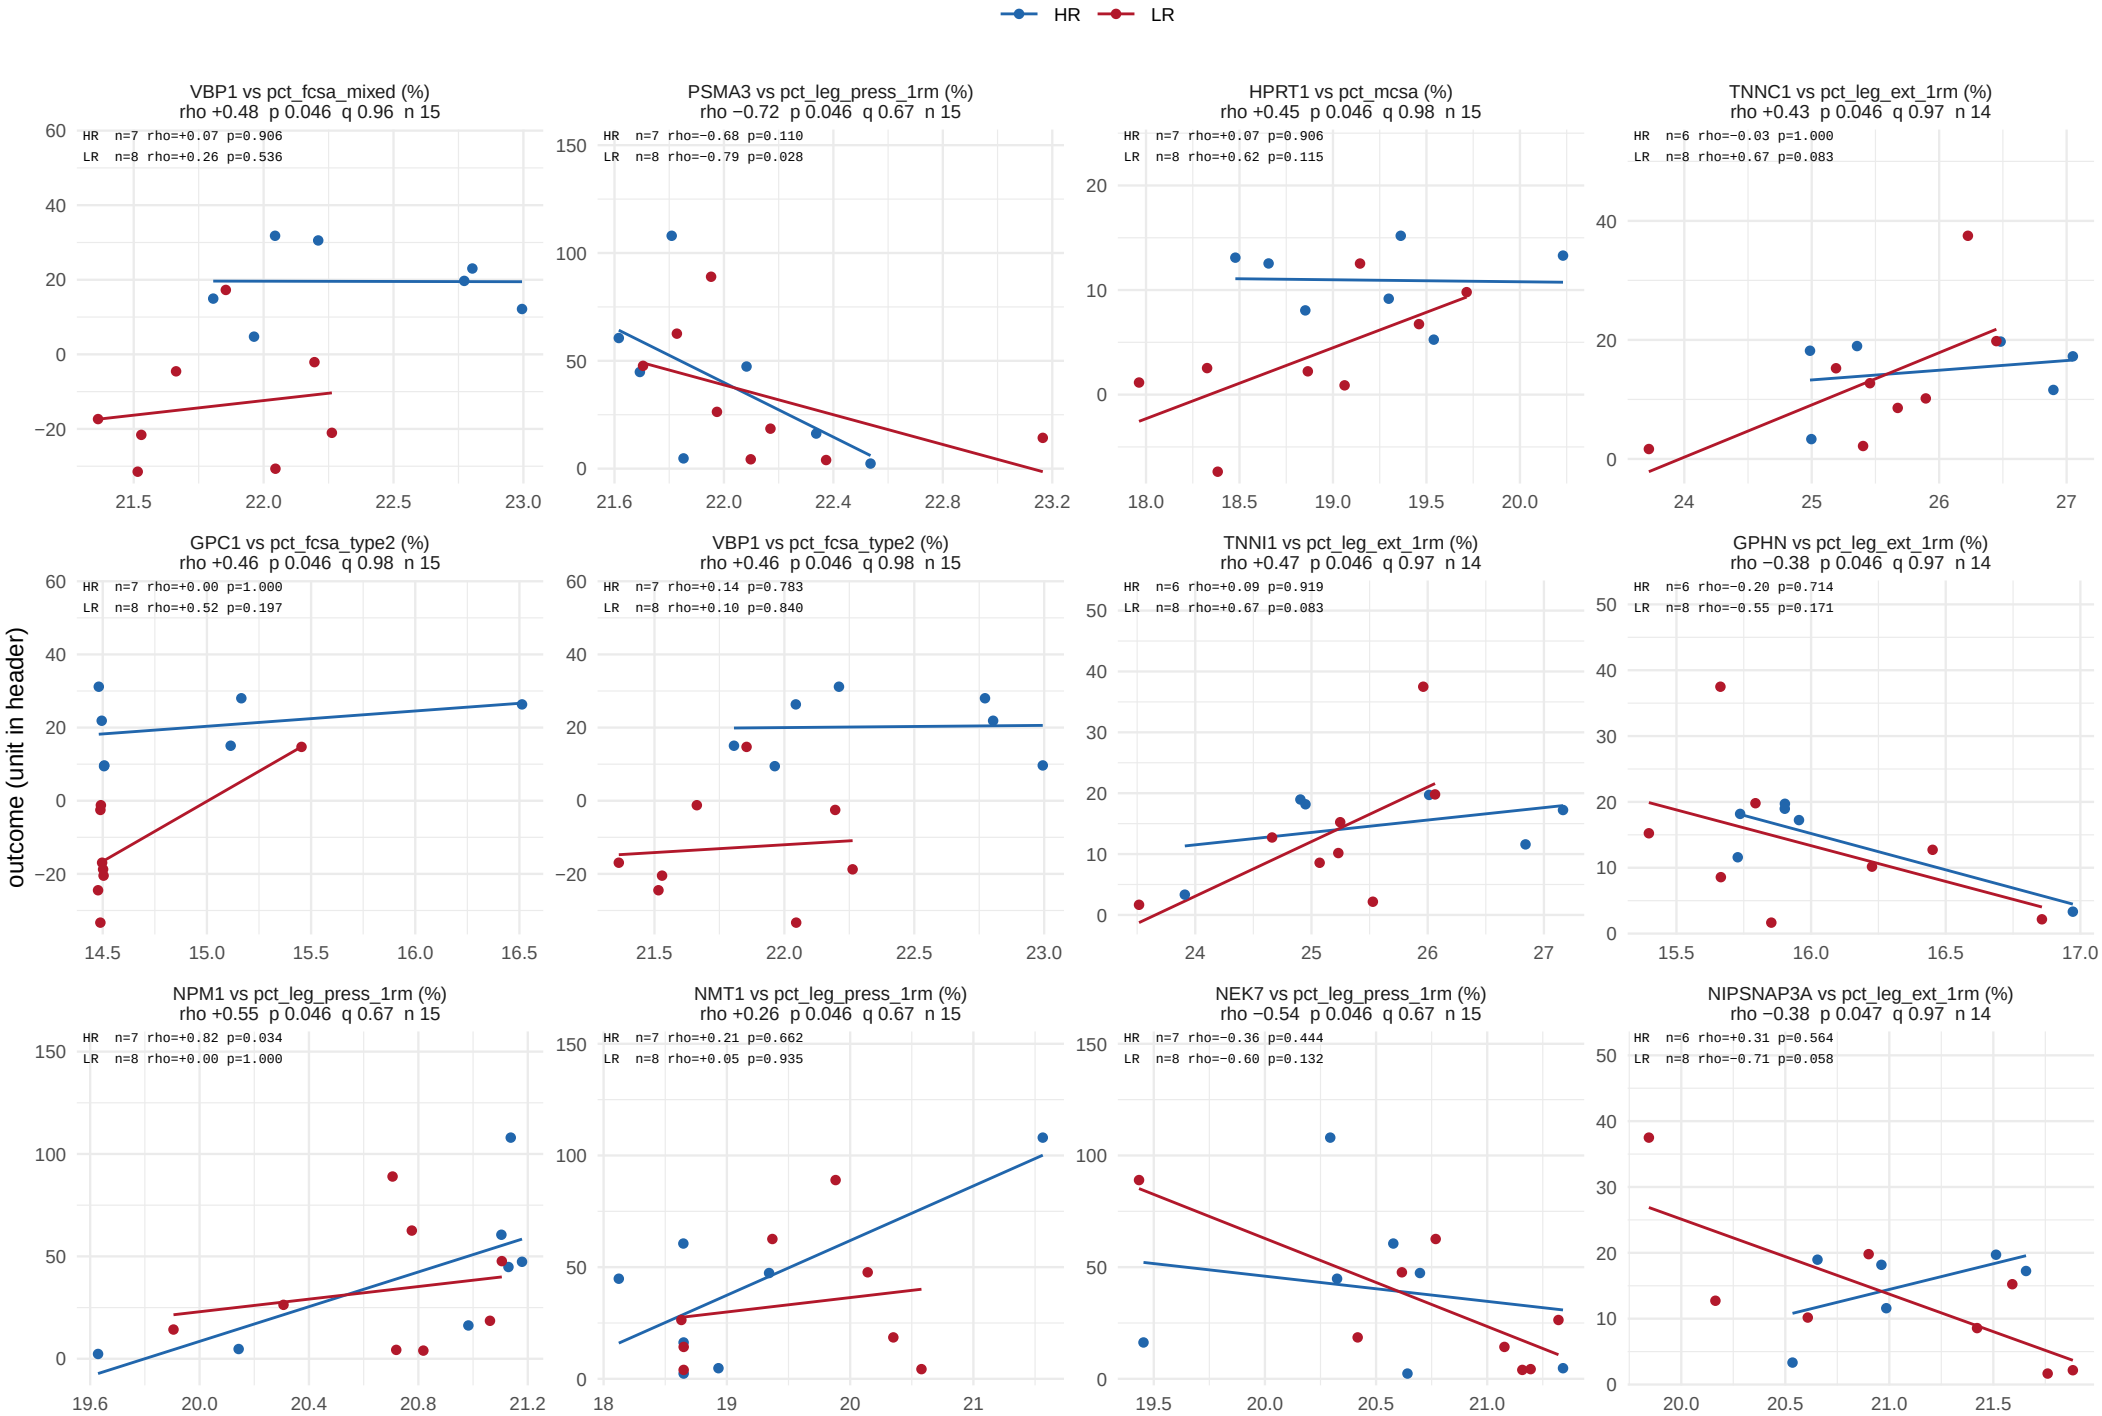

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


695 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 56 of 58.

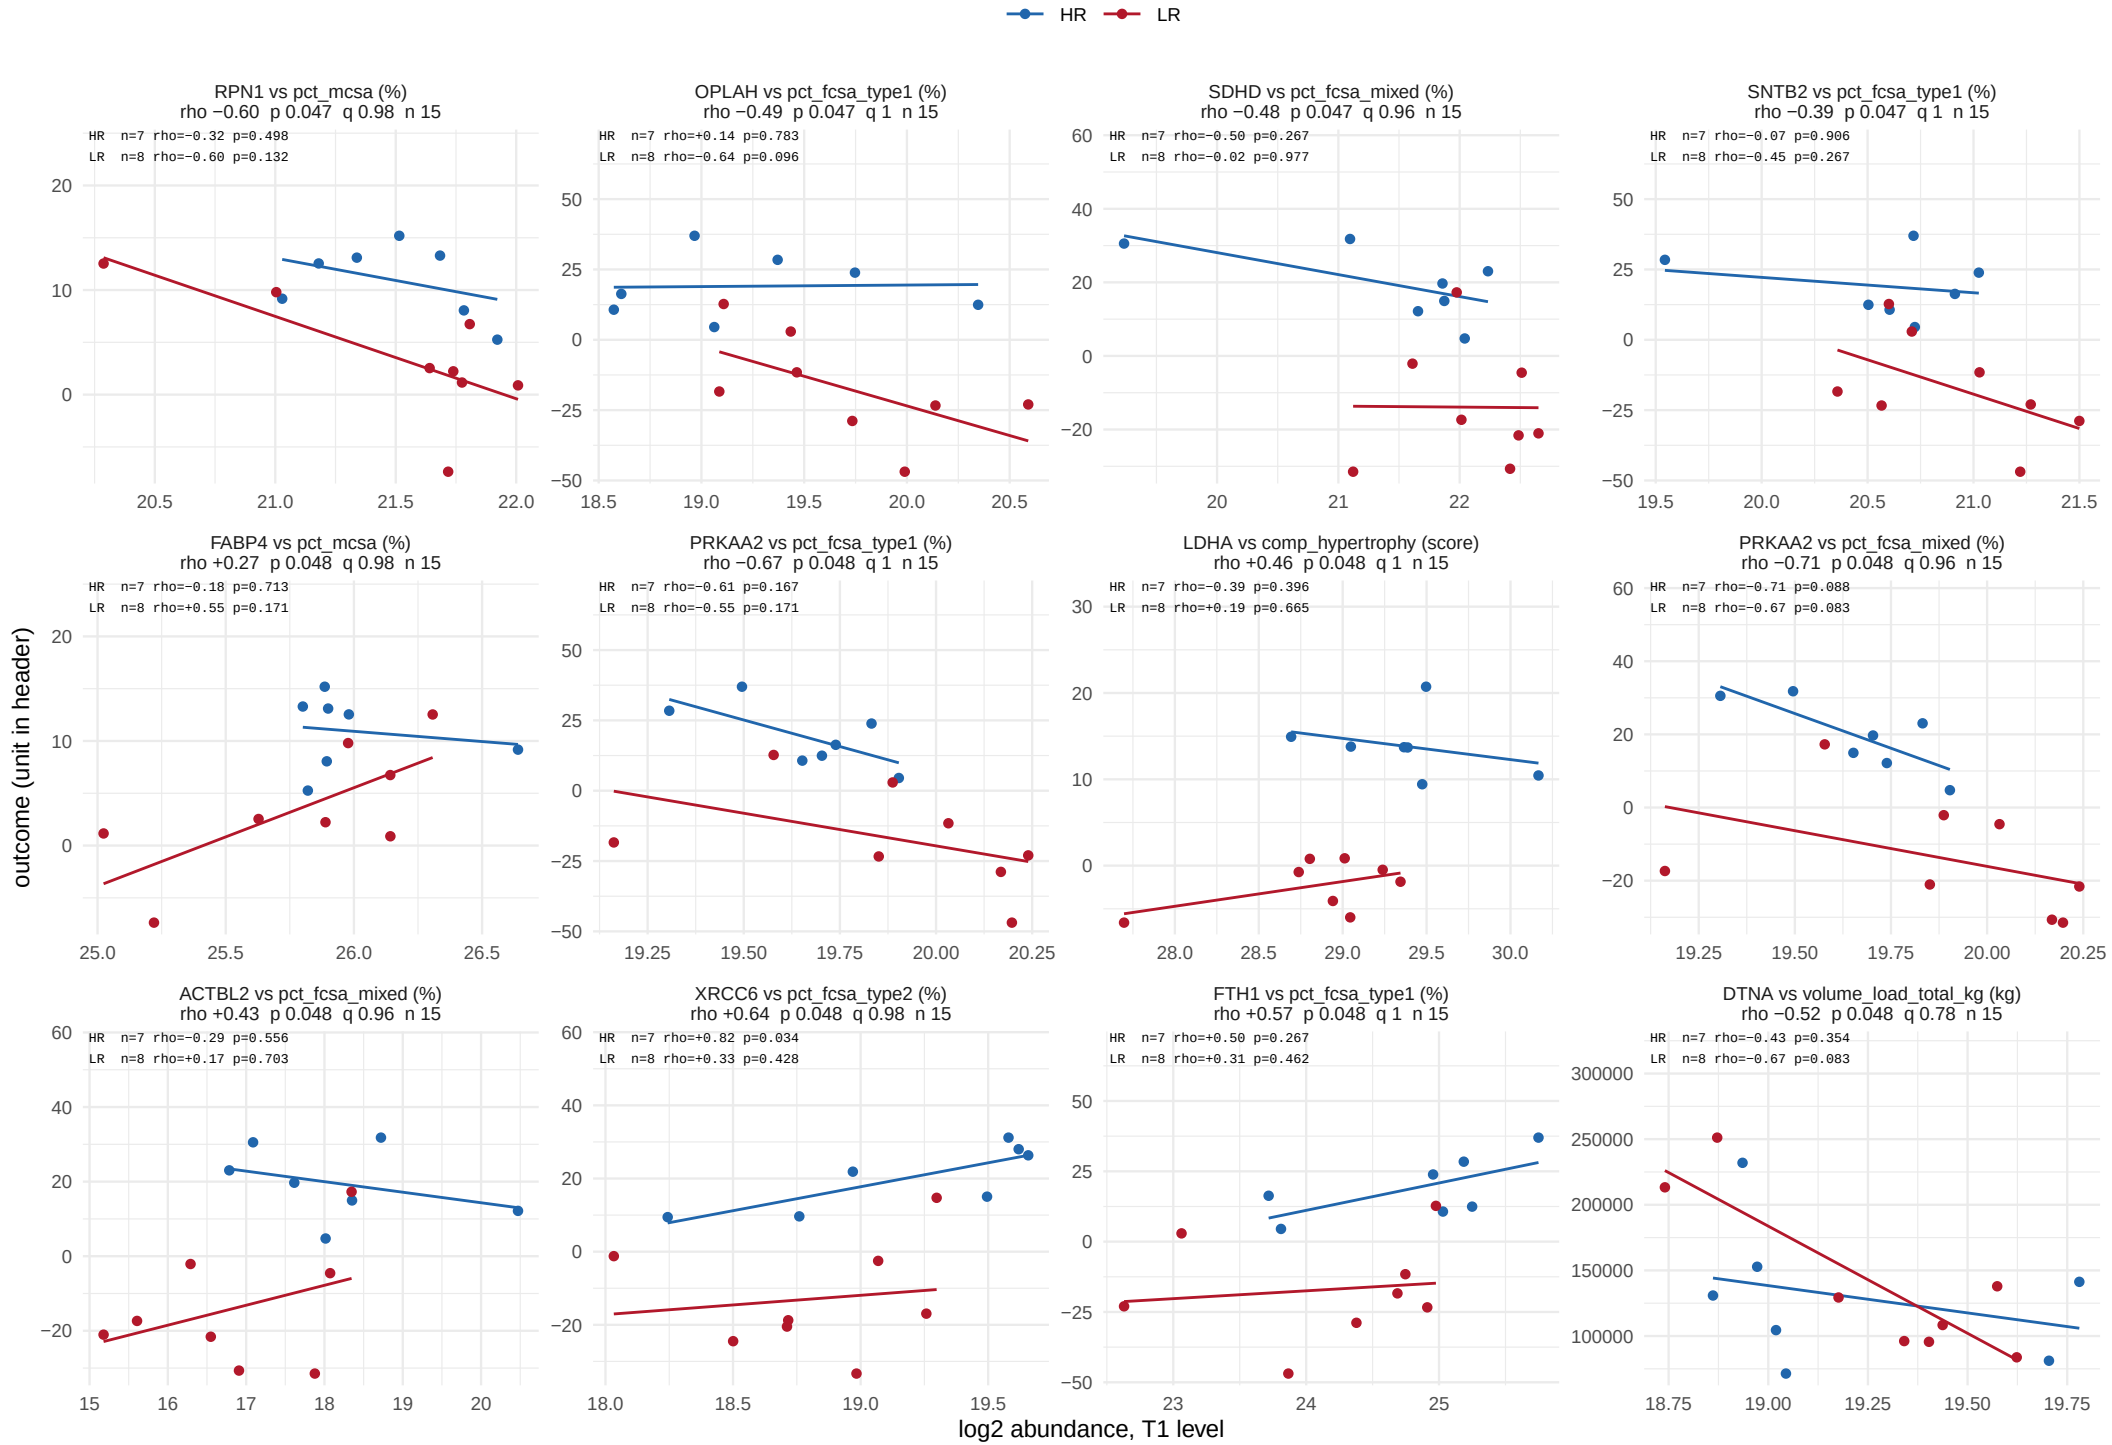

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


695 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 57 of 58.

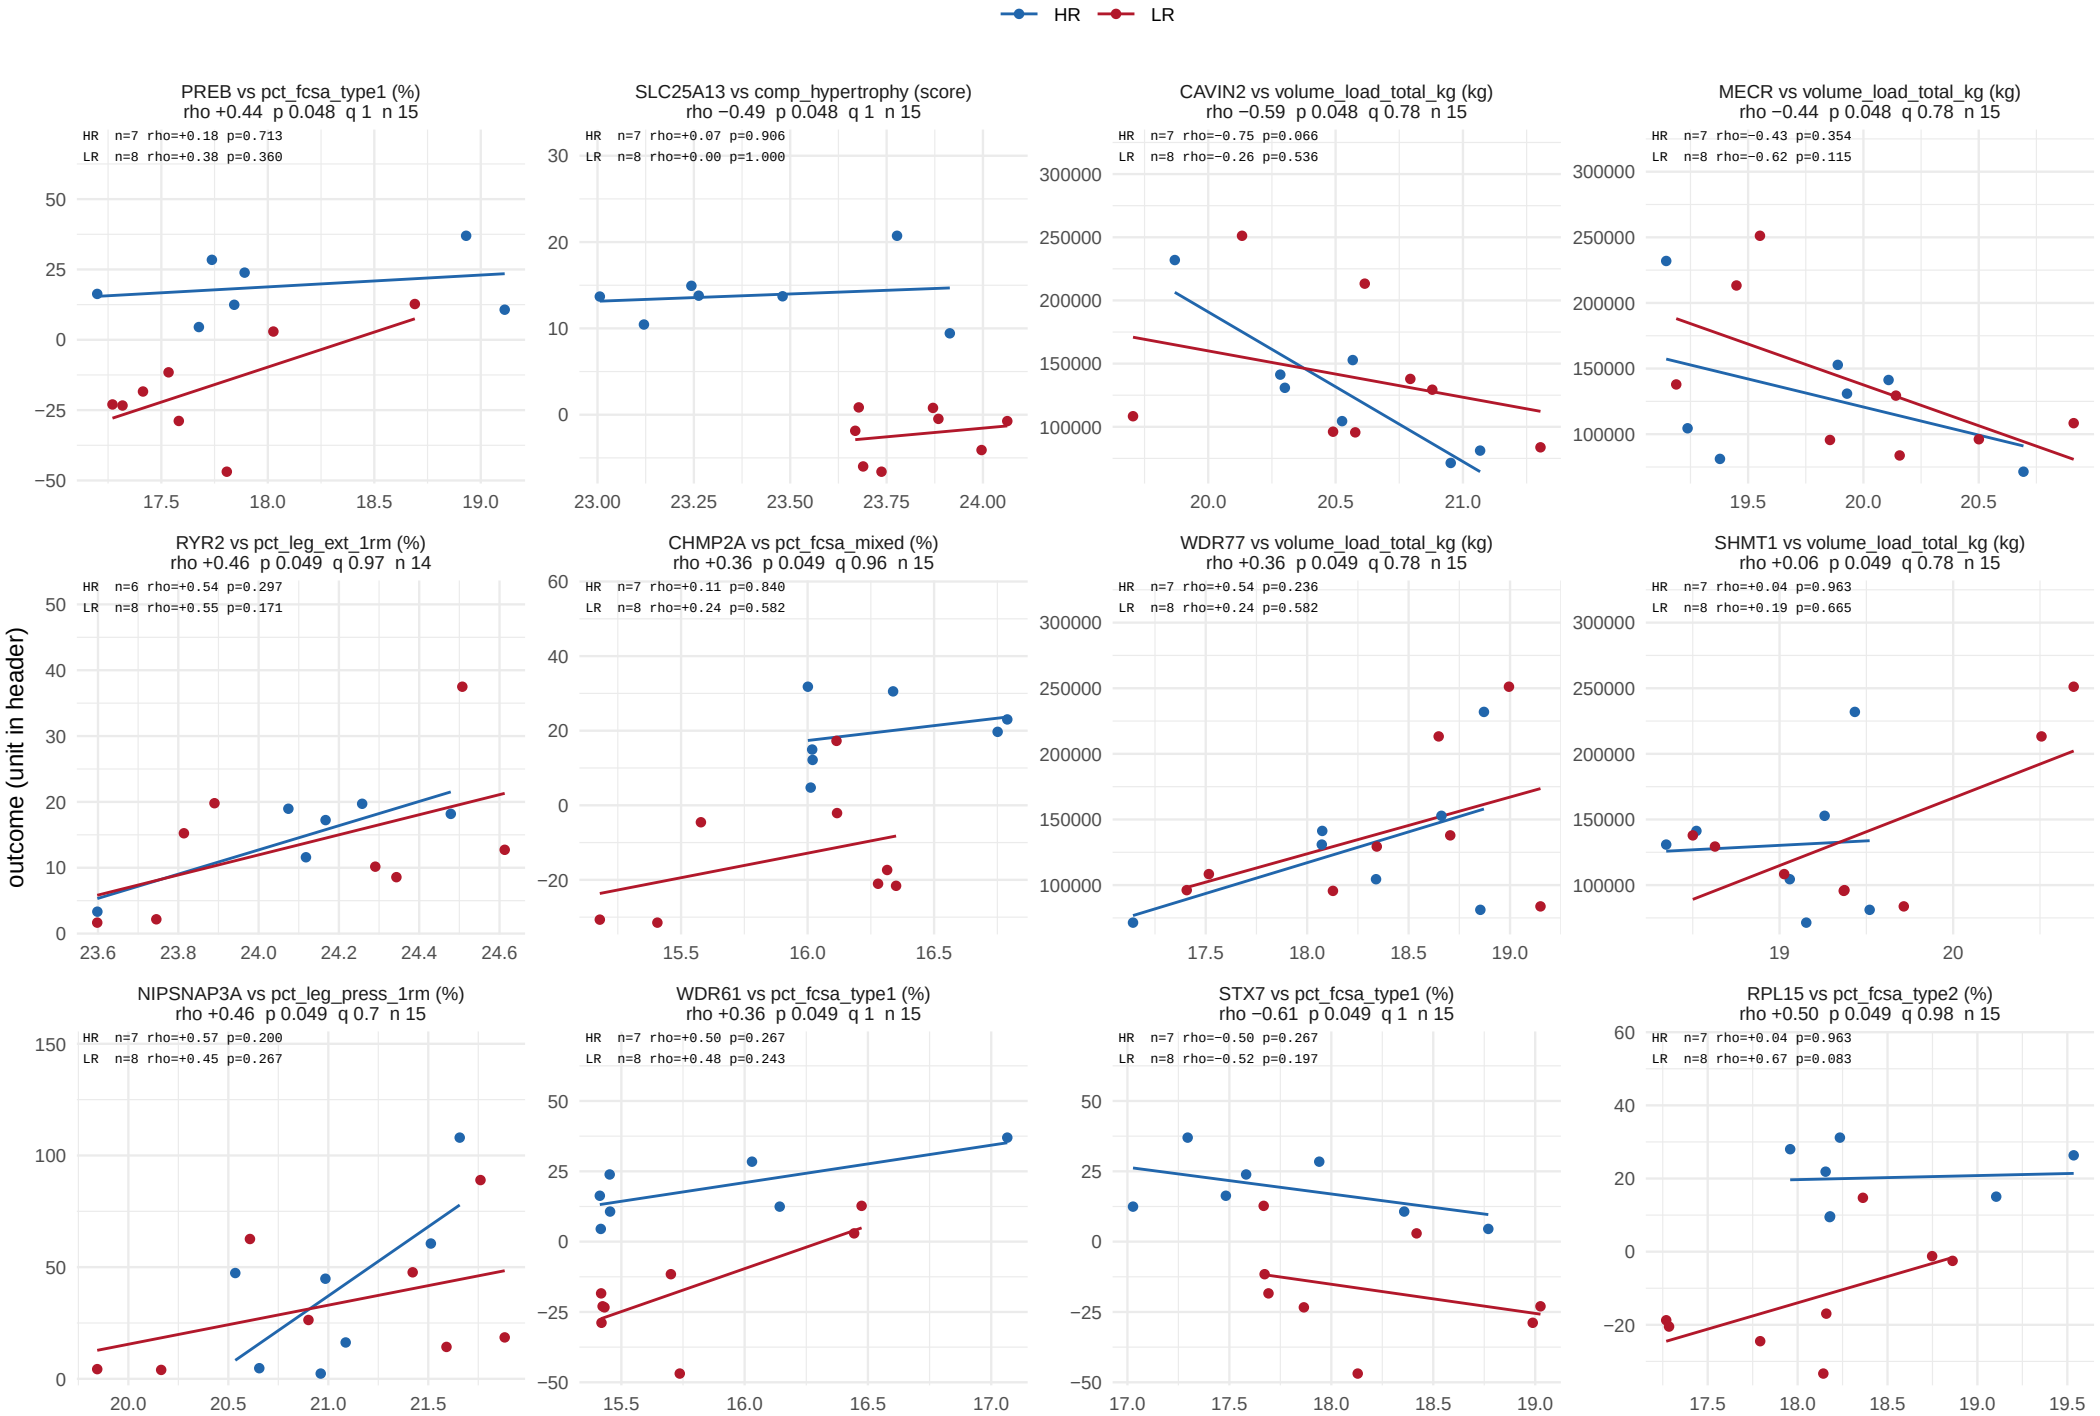

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window

695 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 58 of 58.

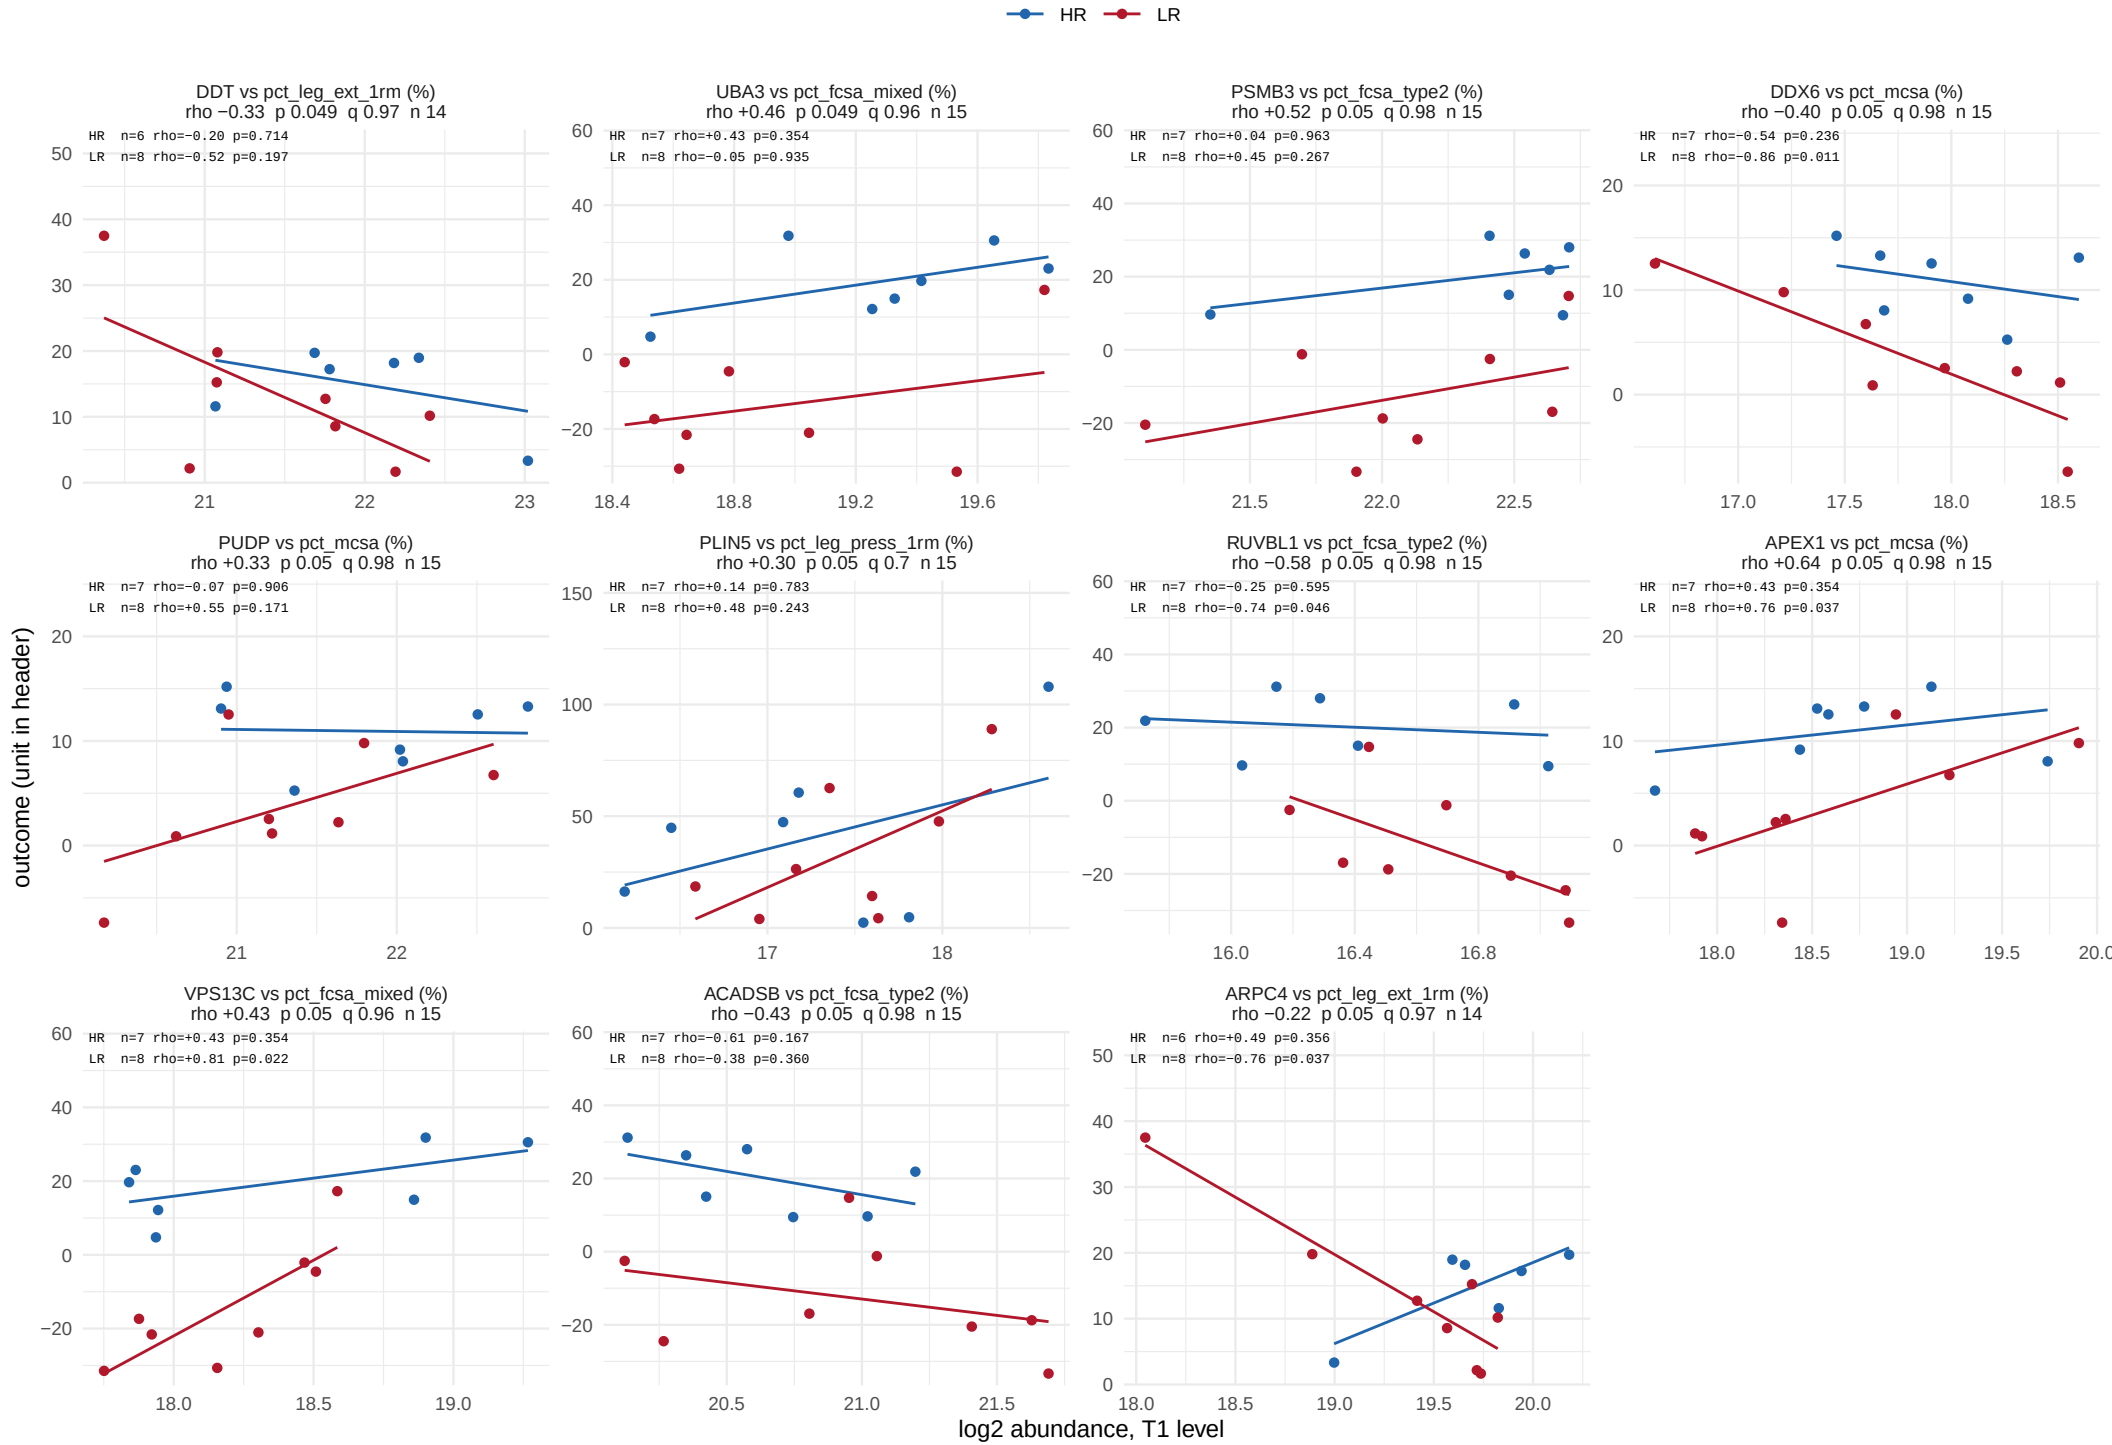

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


763 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 1 of 64.



One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


763 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 2 of 64.

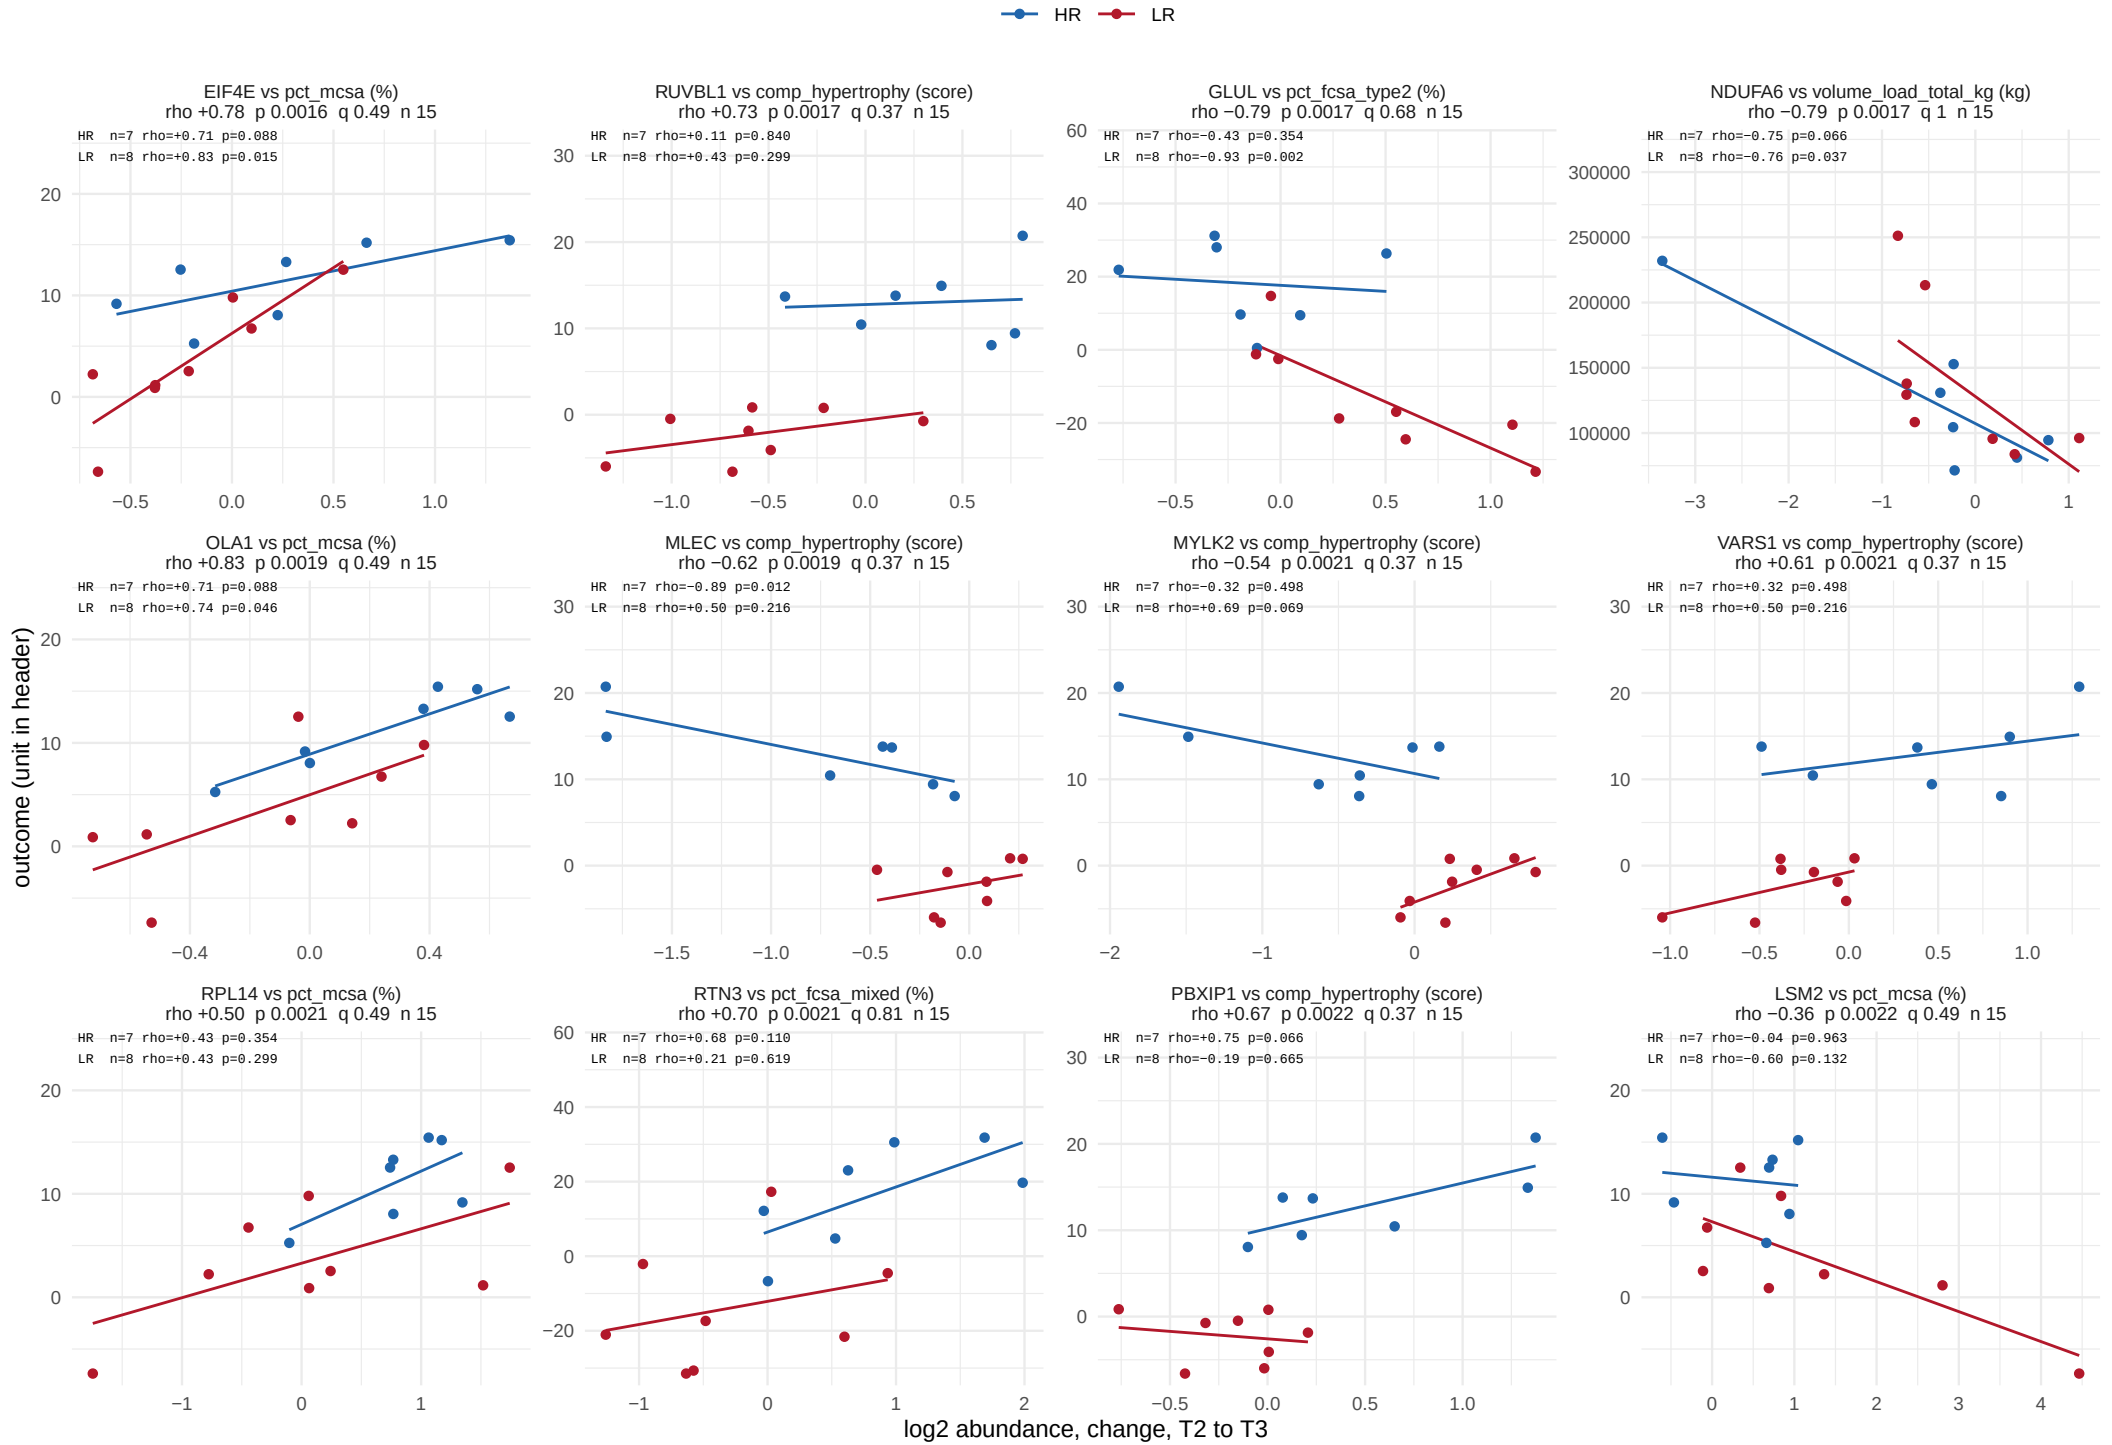

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


763 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 3 of 64.

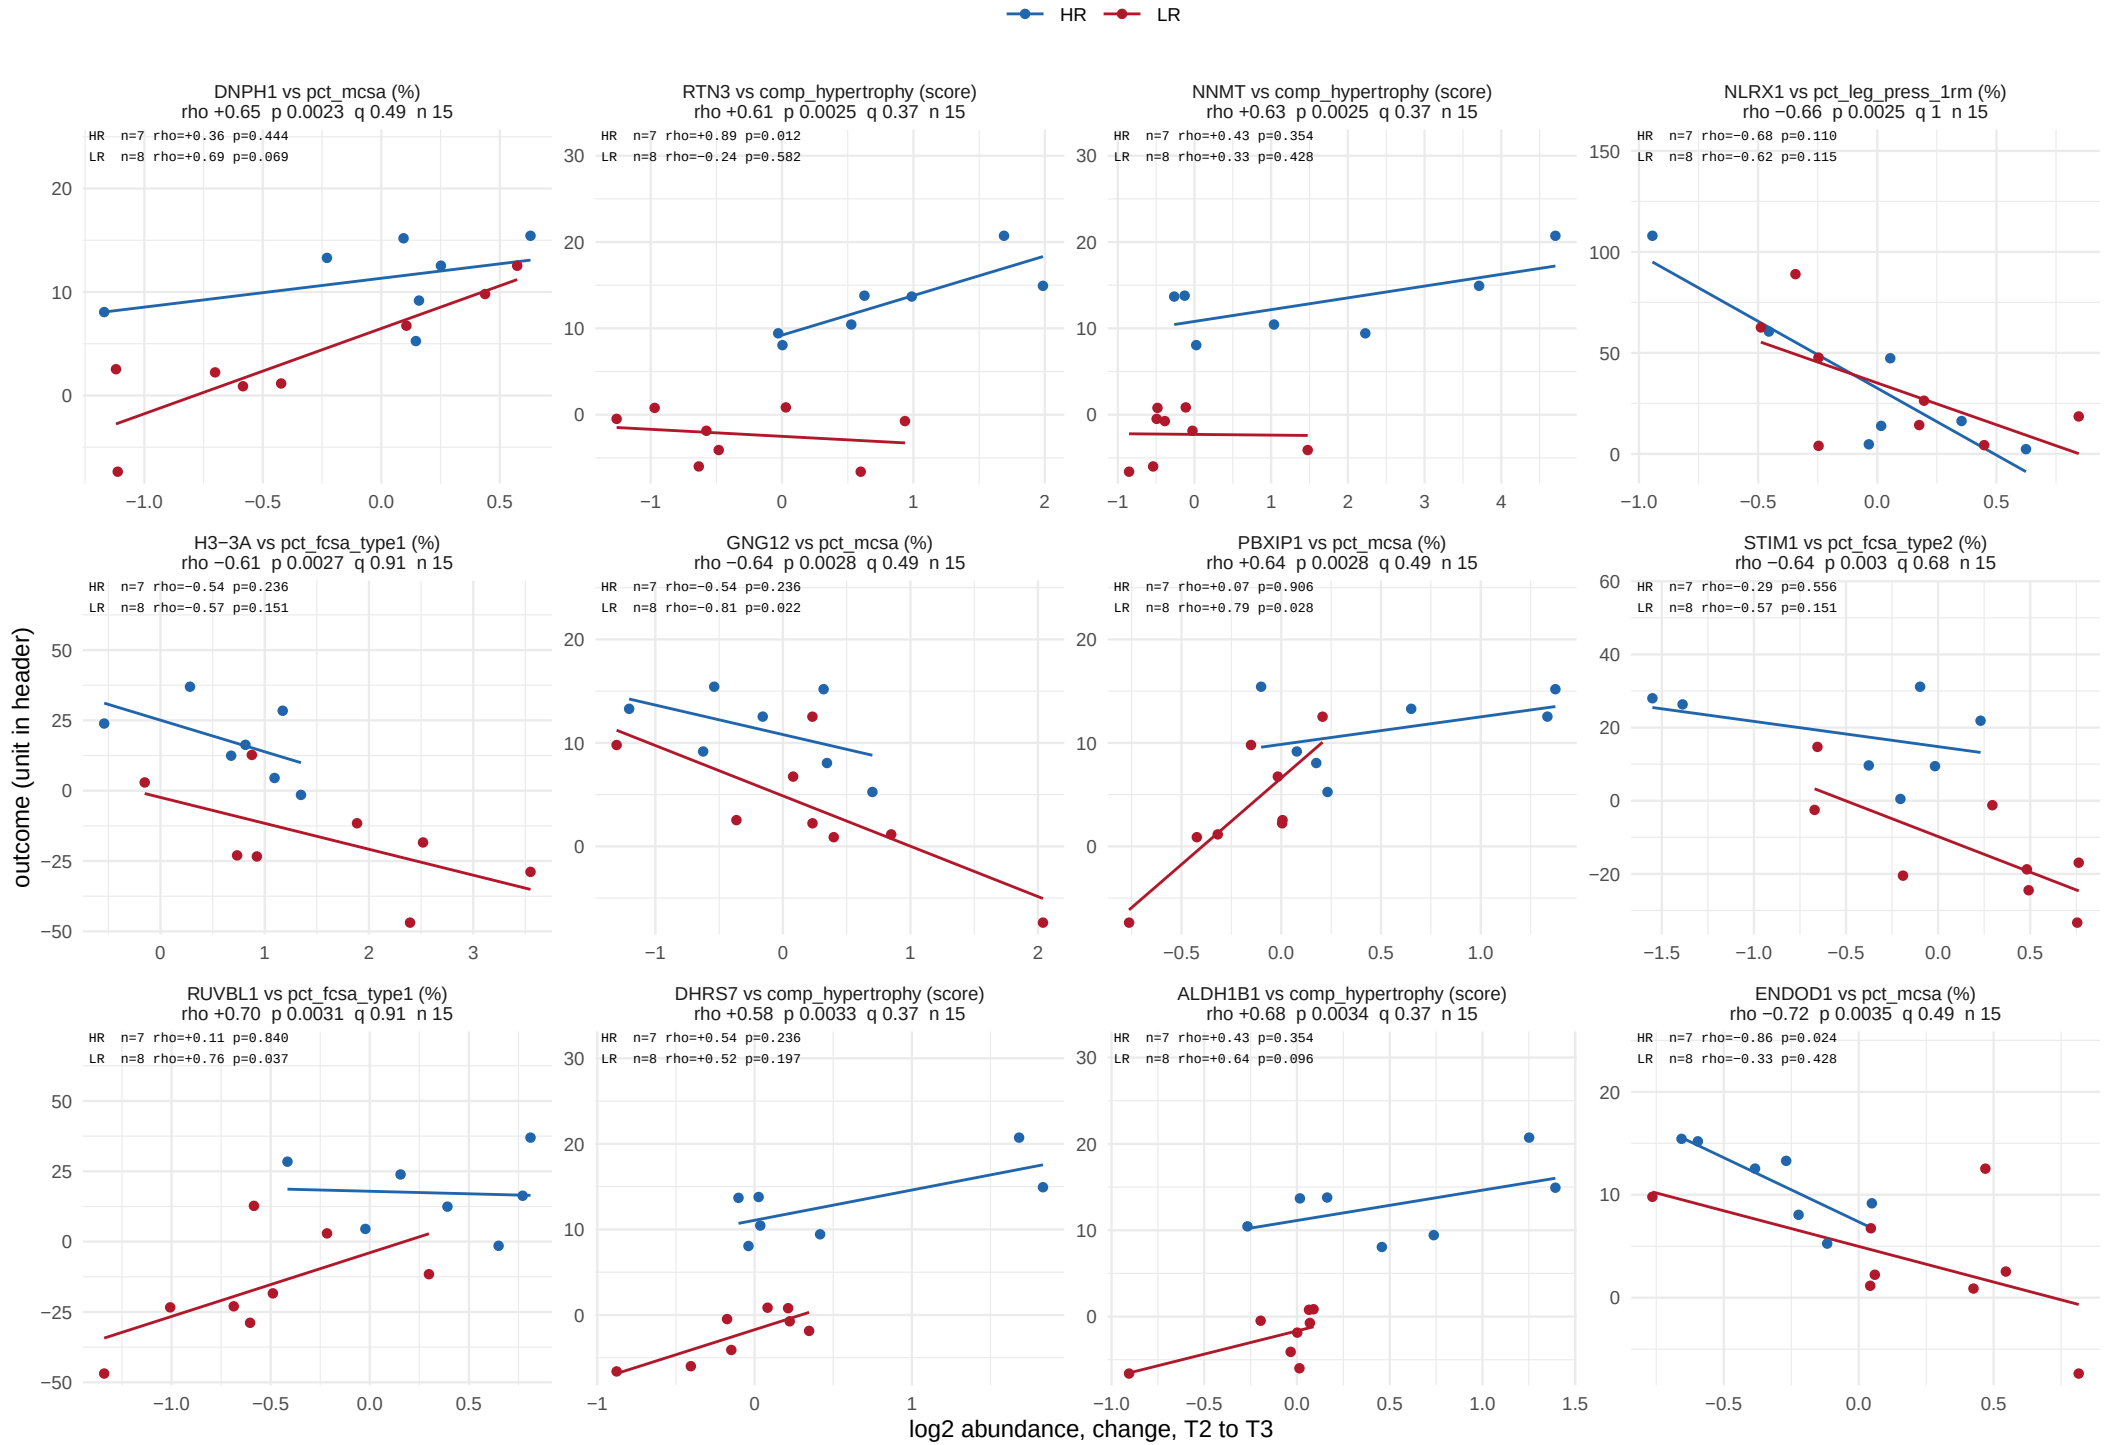

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


763 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 4 of 64.

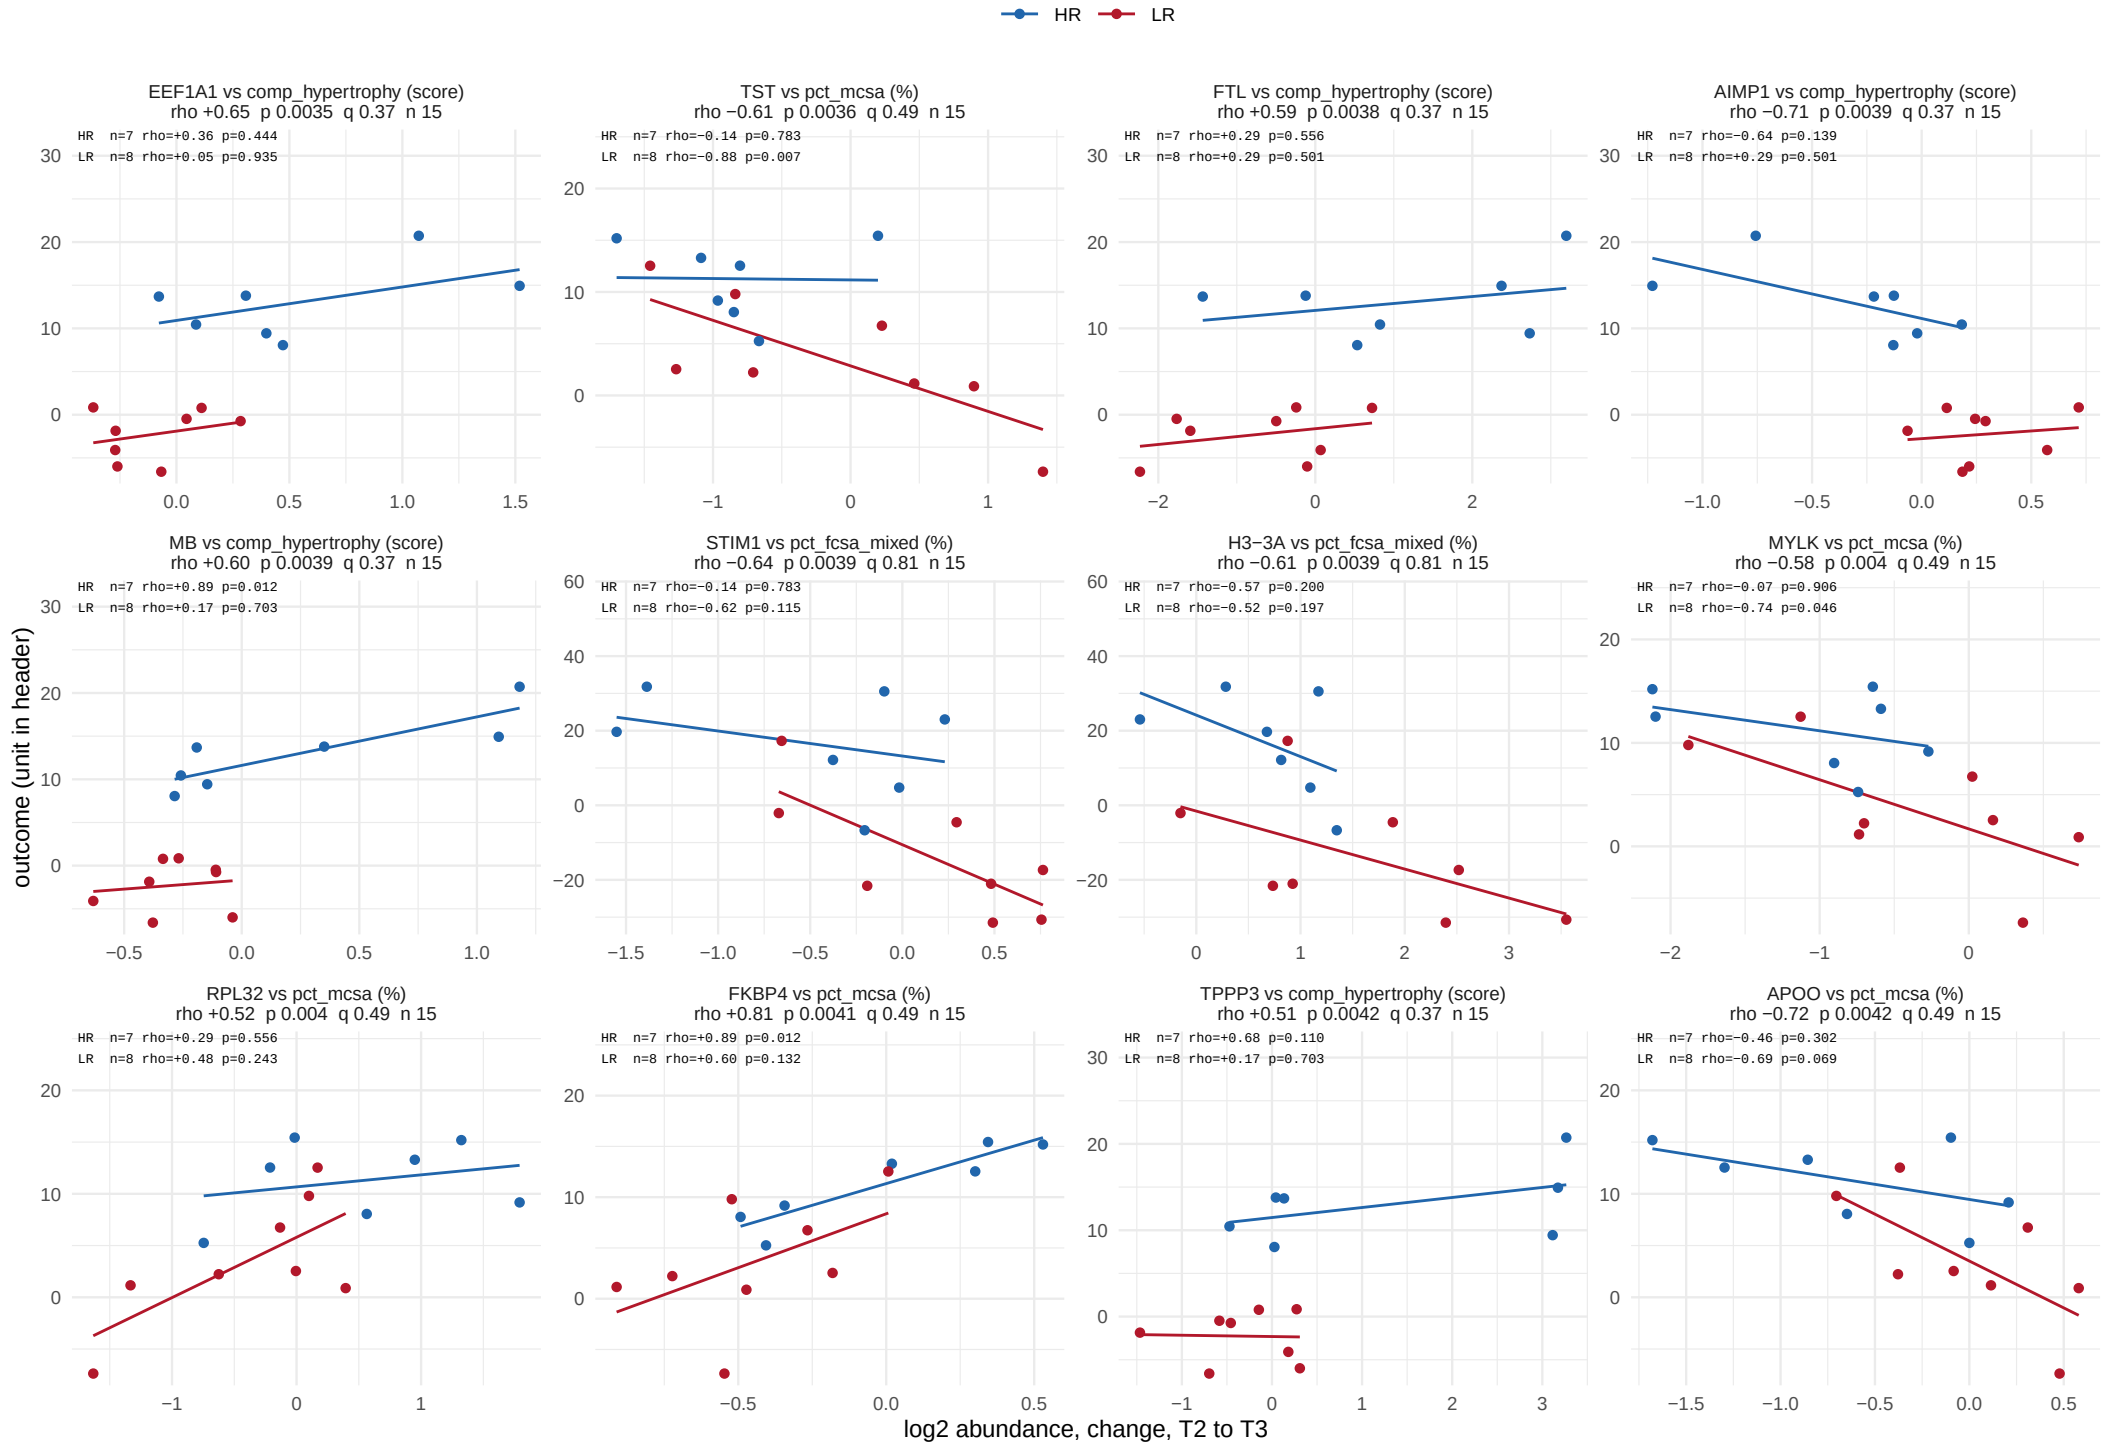

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


763 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 5 of 64.

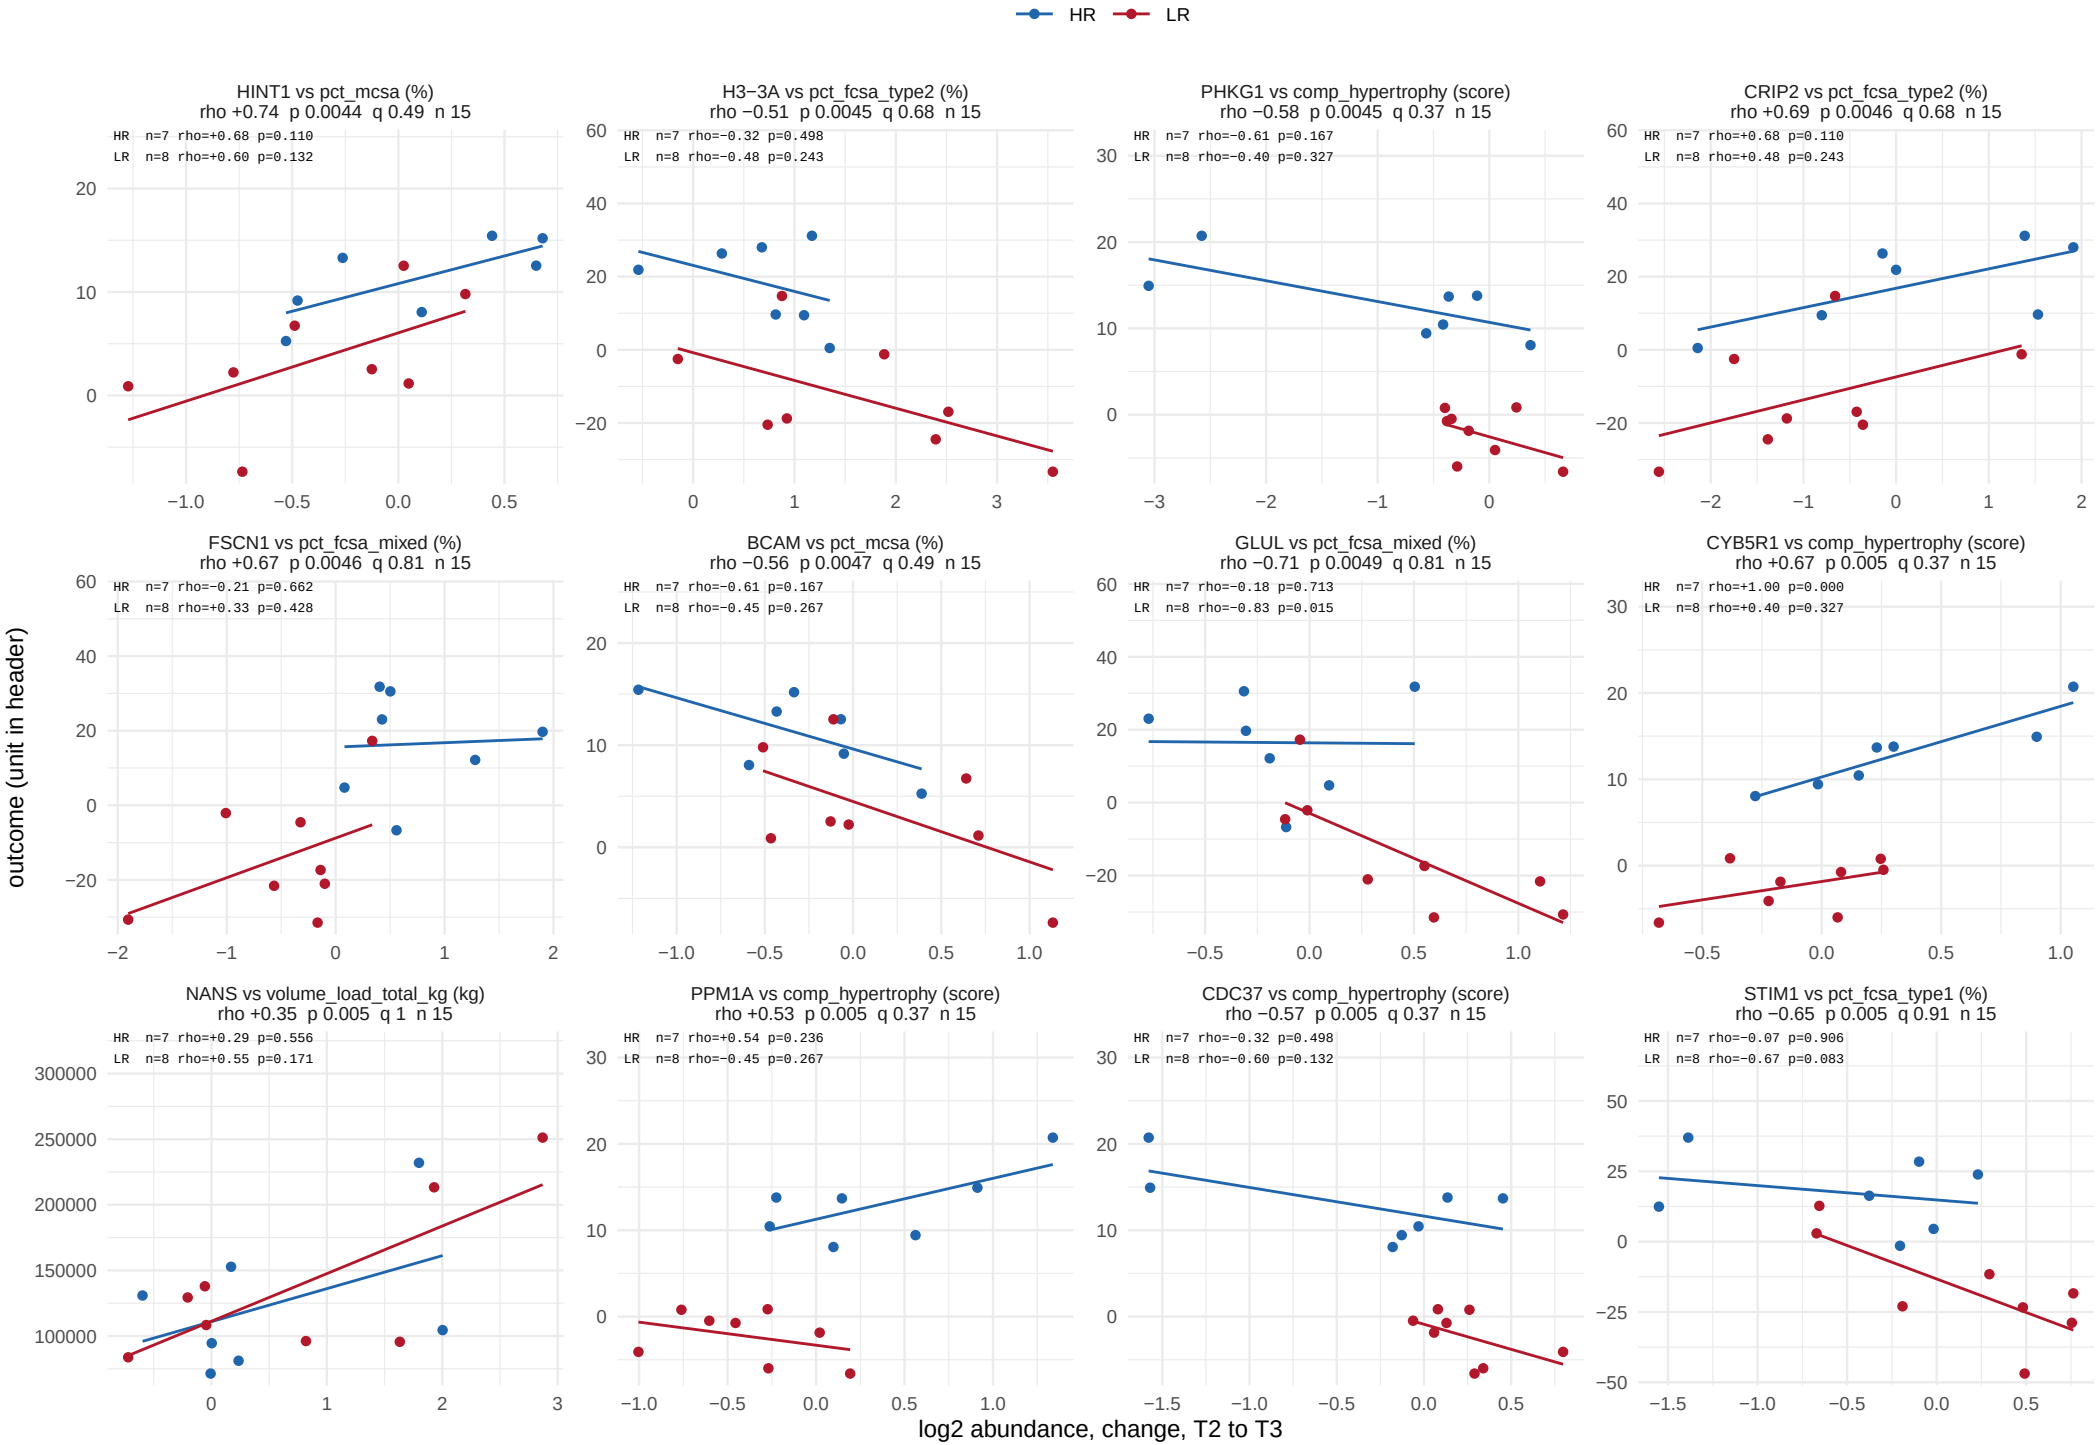

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


763 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 6 of 64.

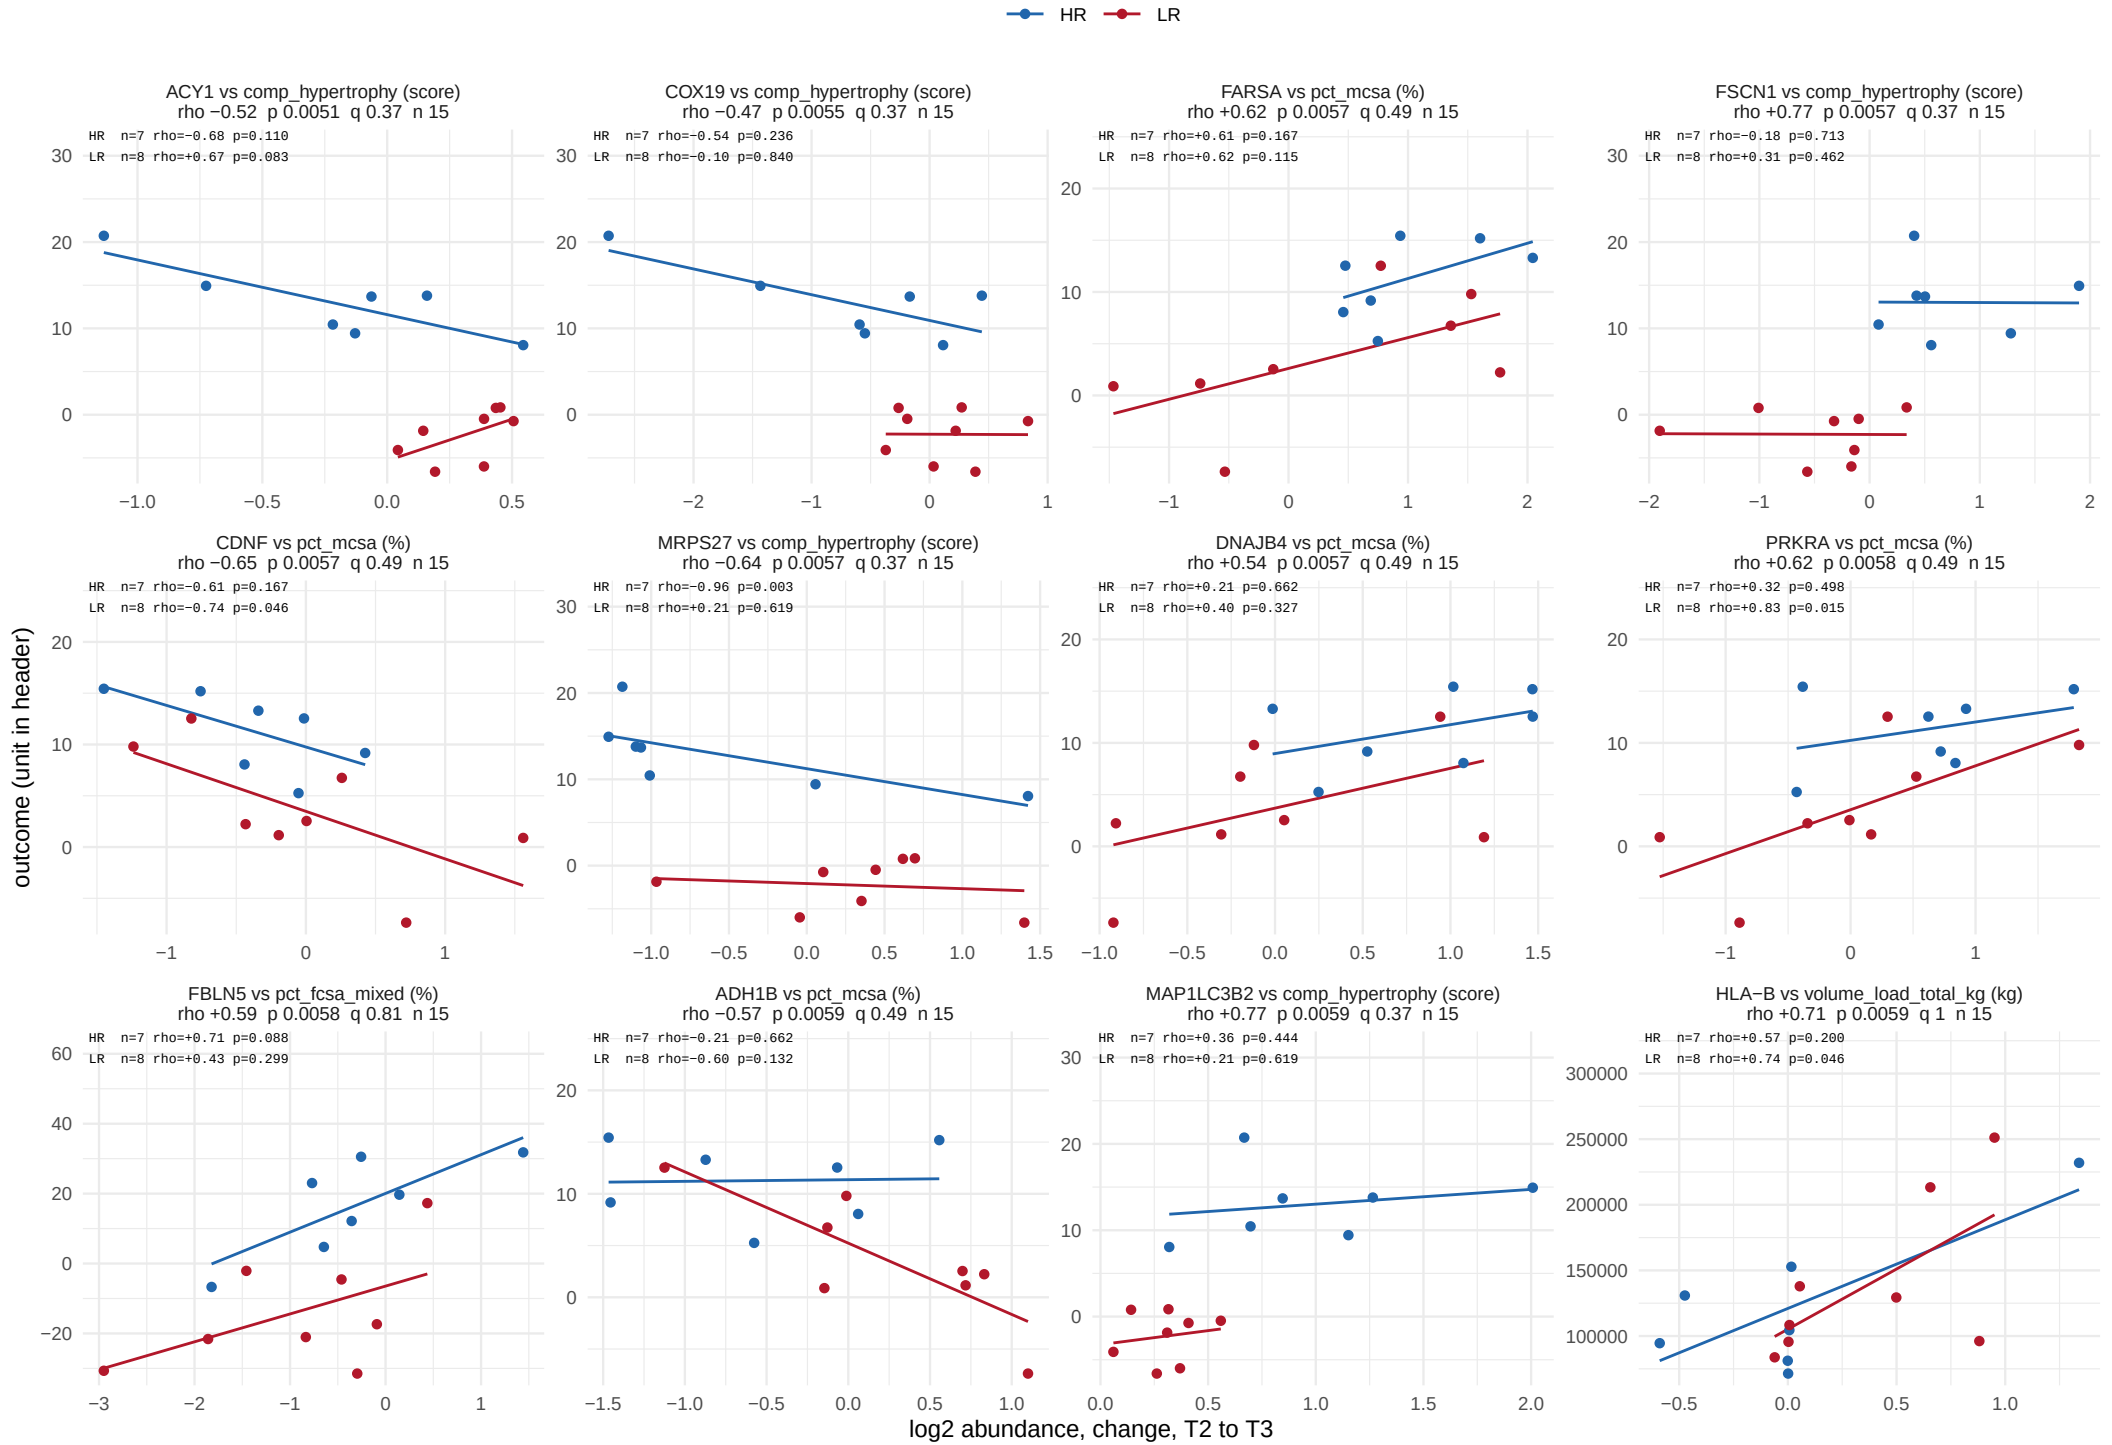

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


763 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 7 of 64.

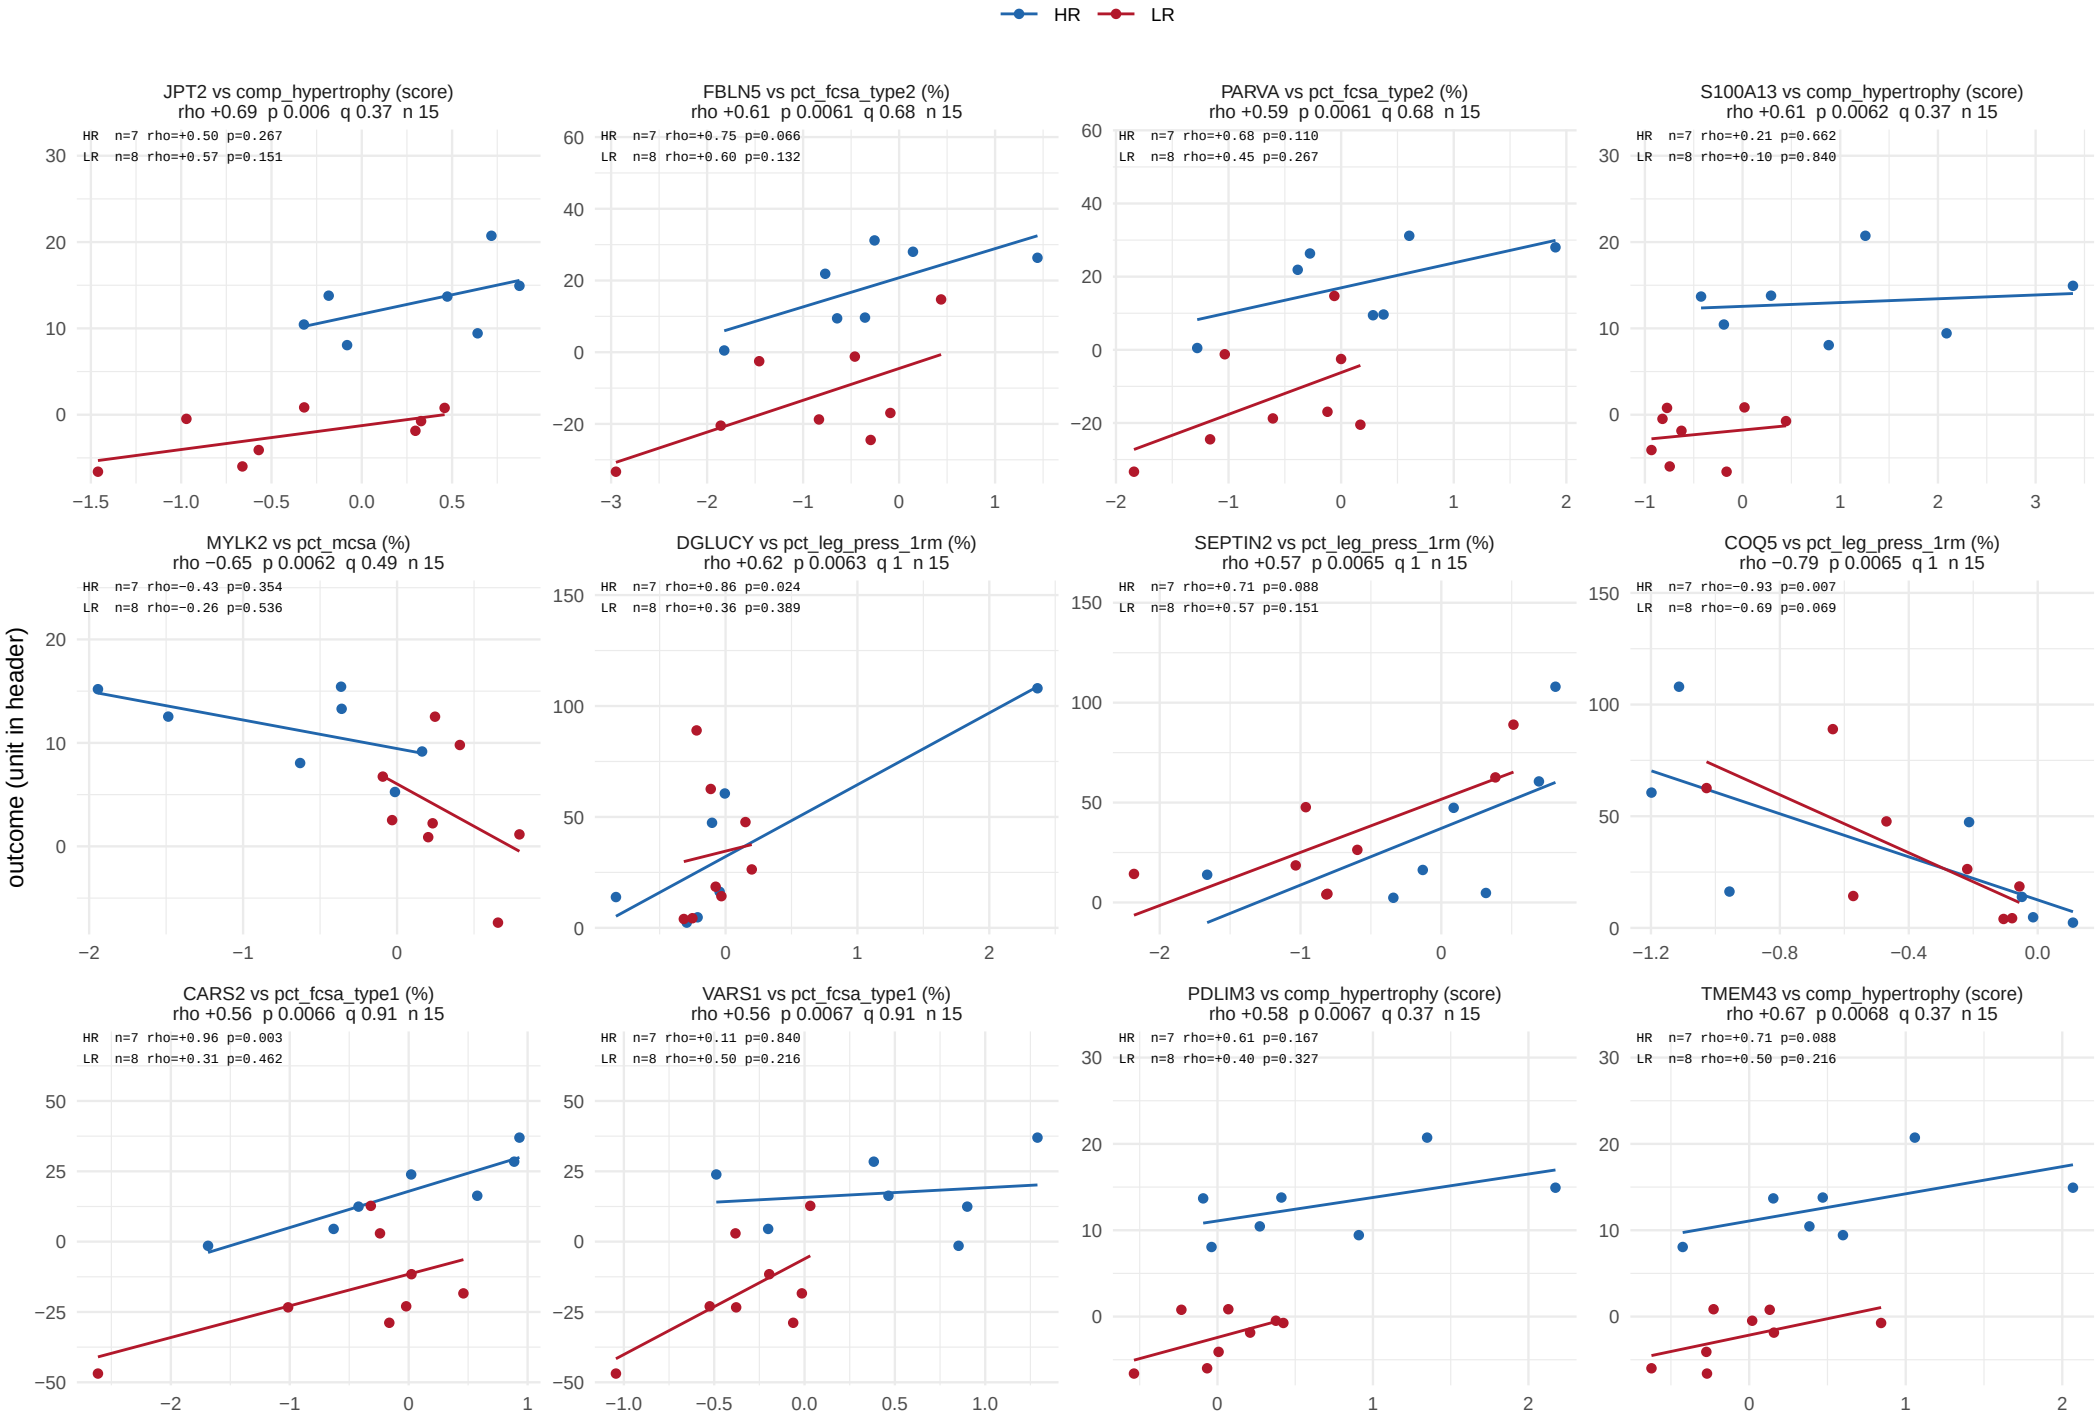

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


763 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 8 of 64.

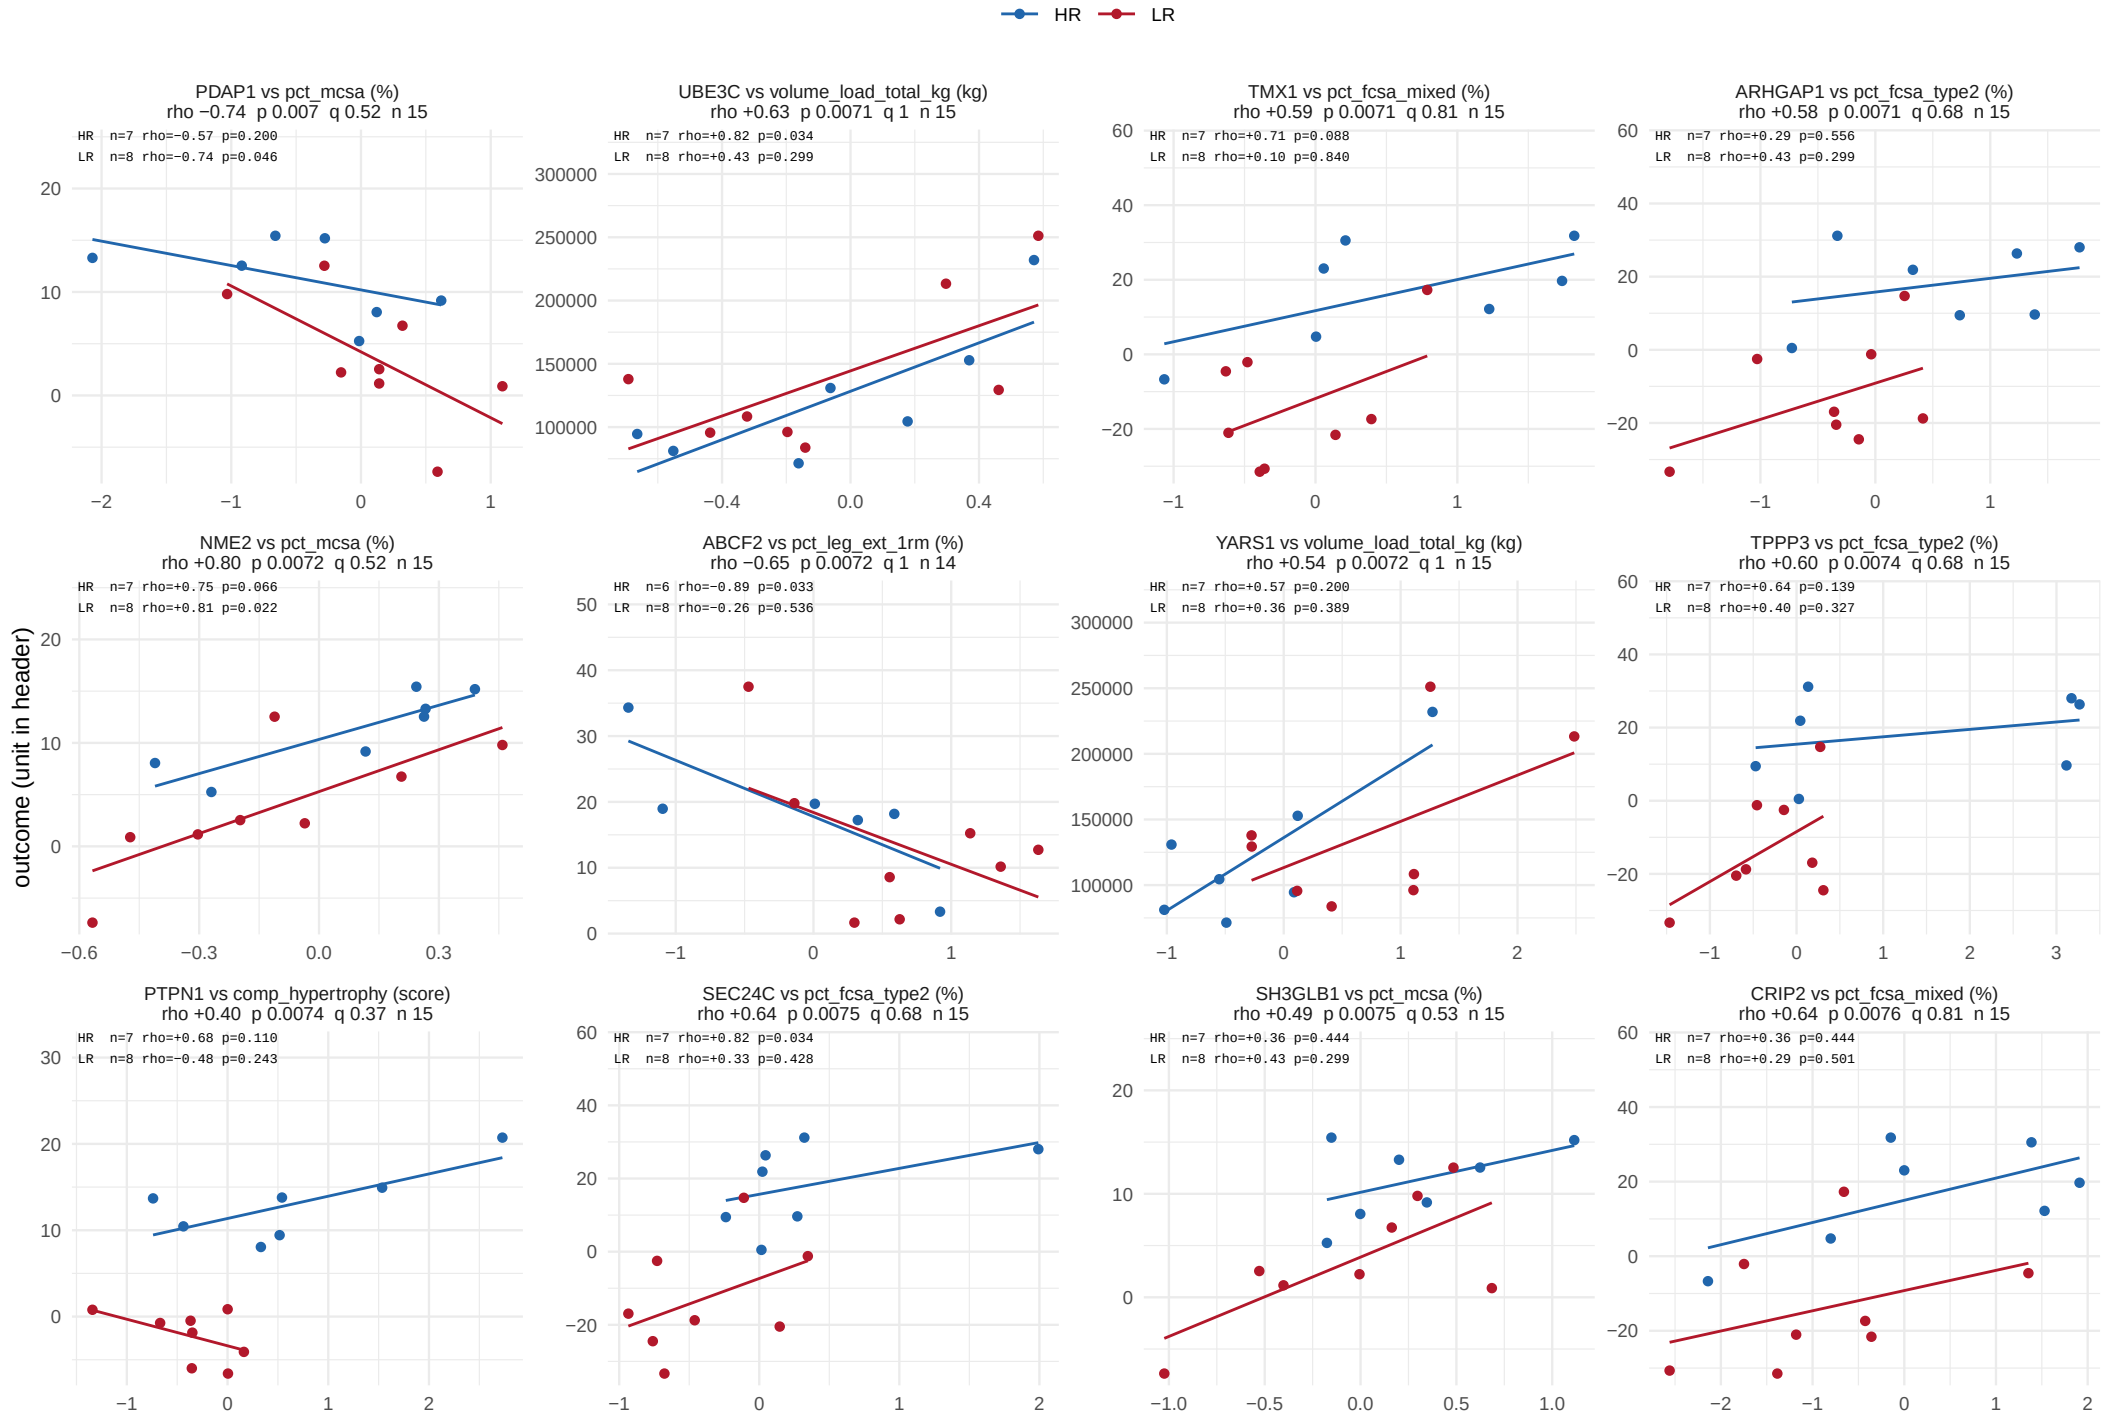

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


763 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 9 of 64.

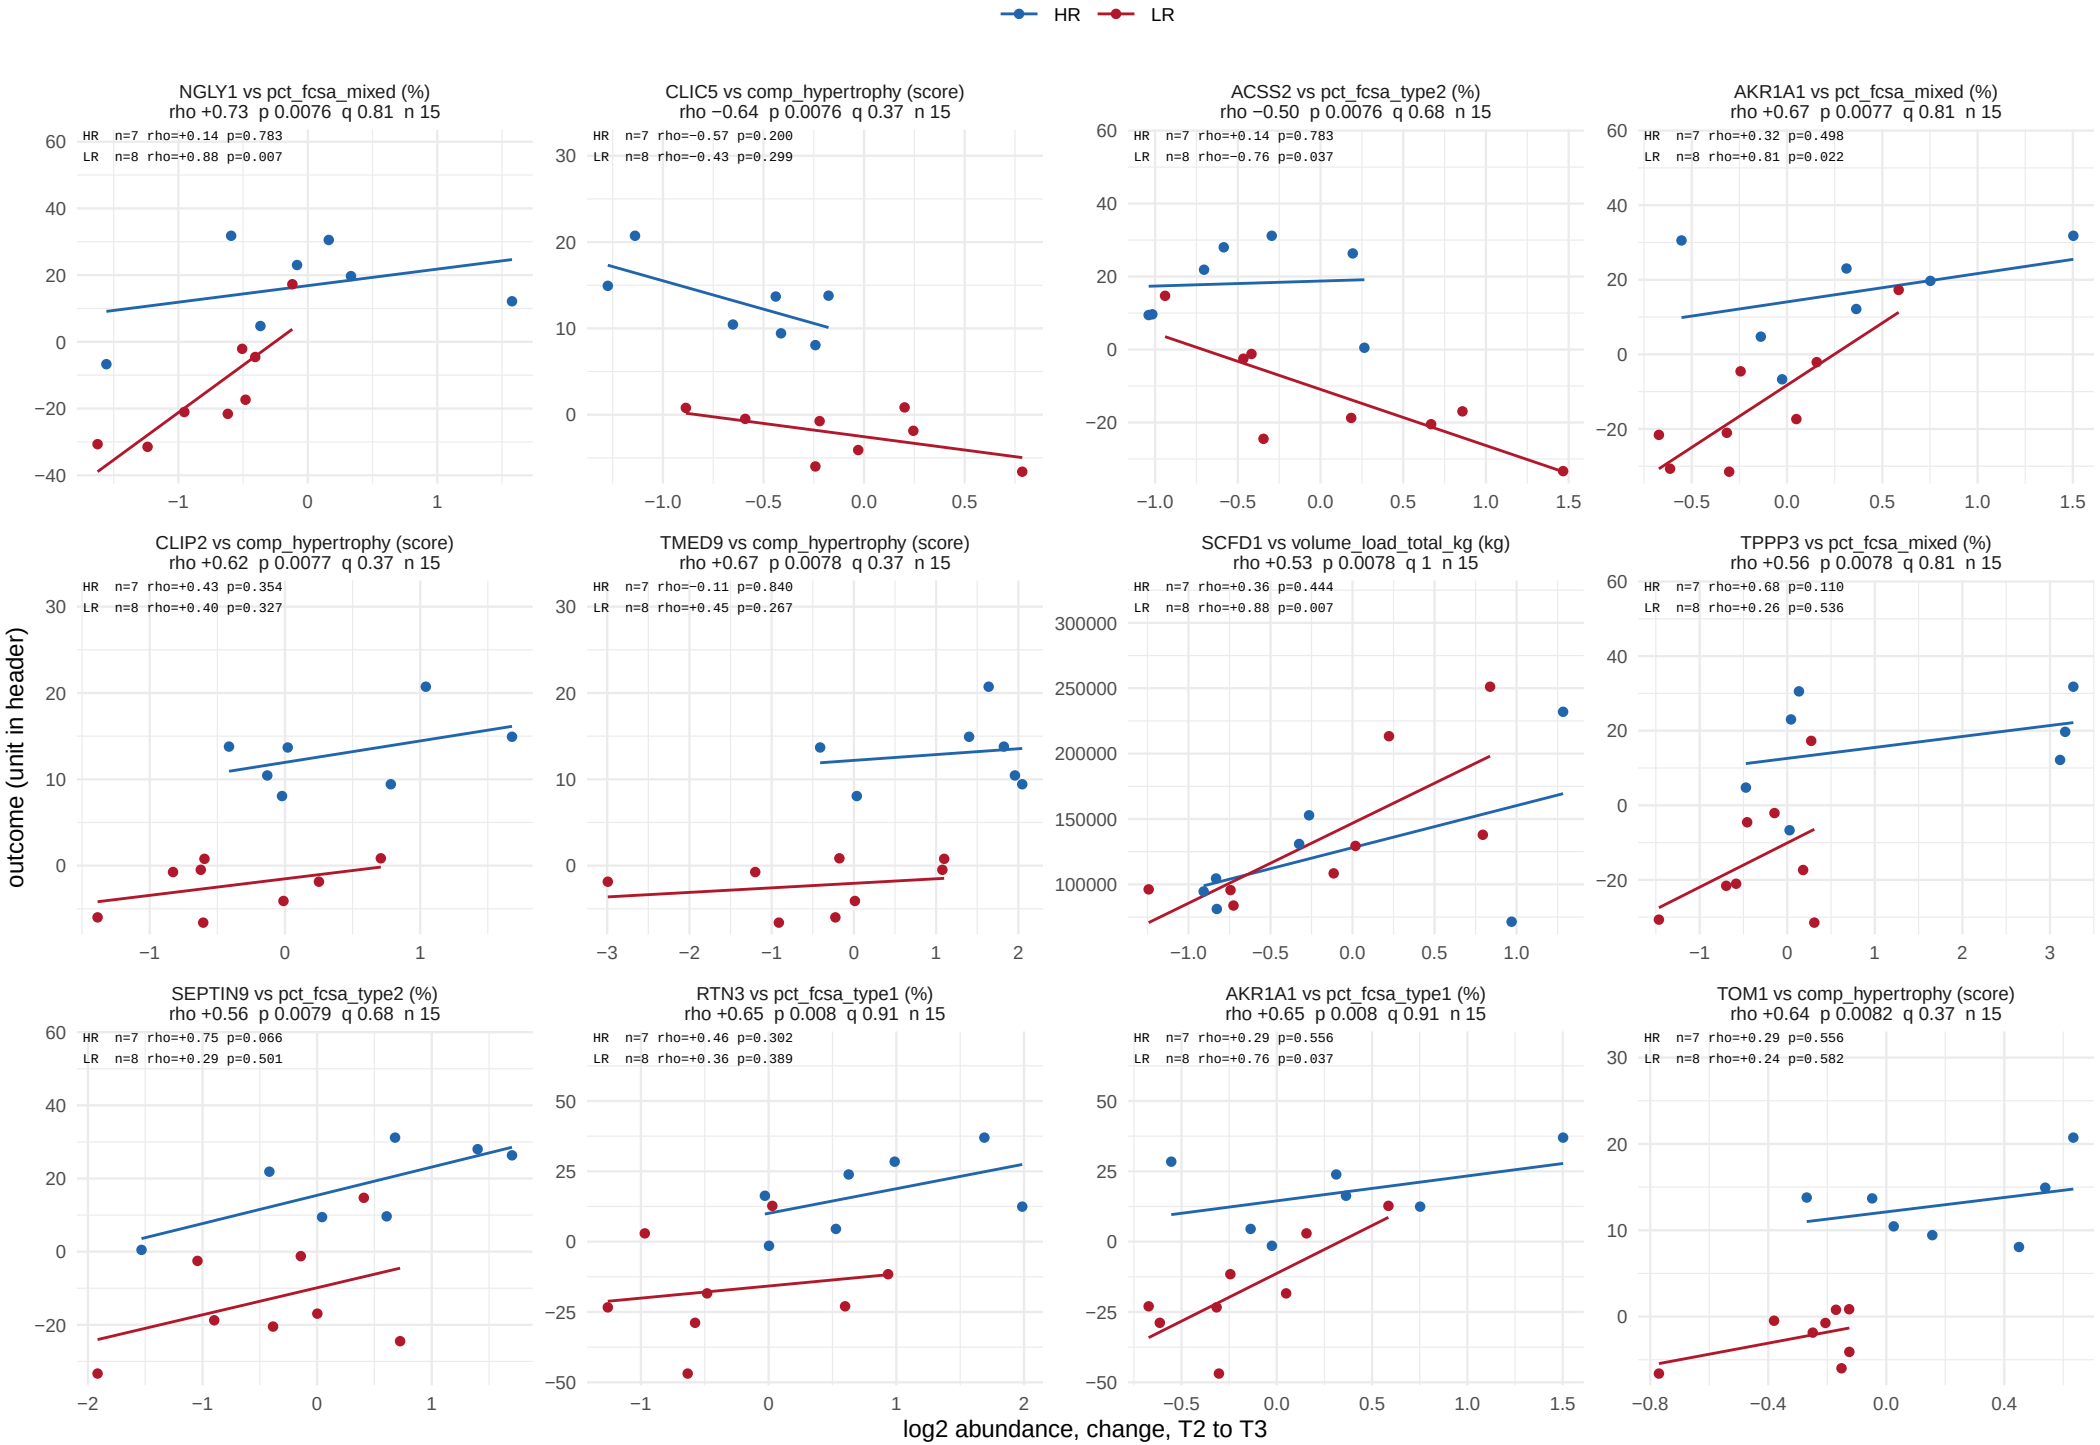

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


763 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 10 of 64.

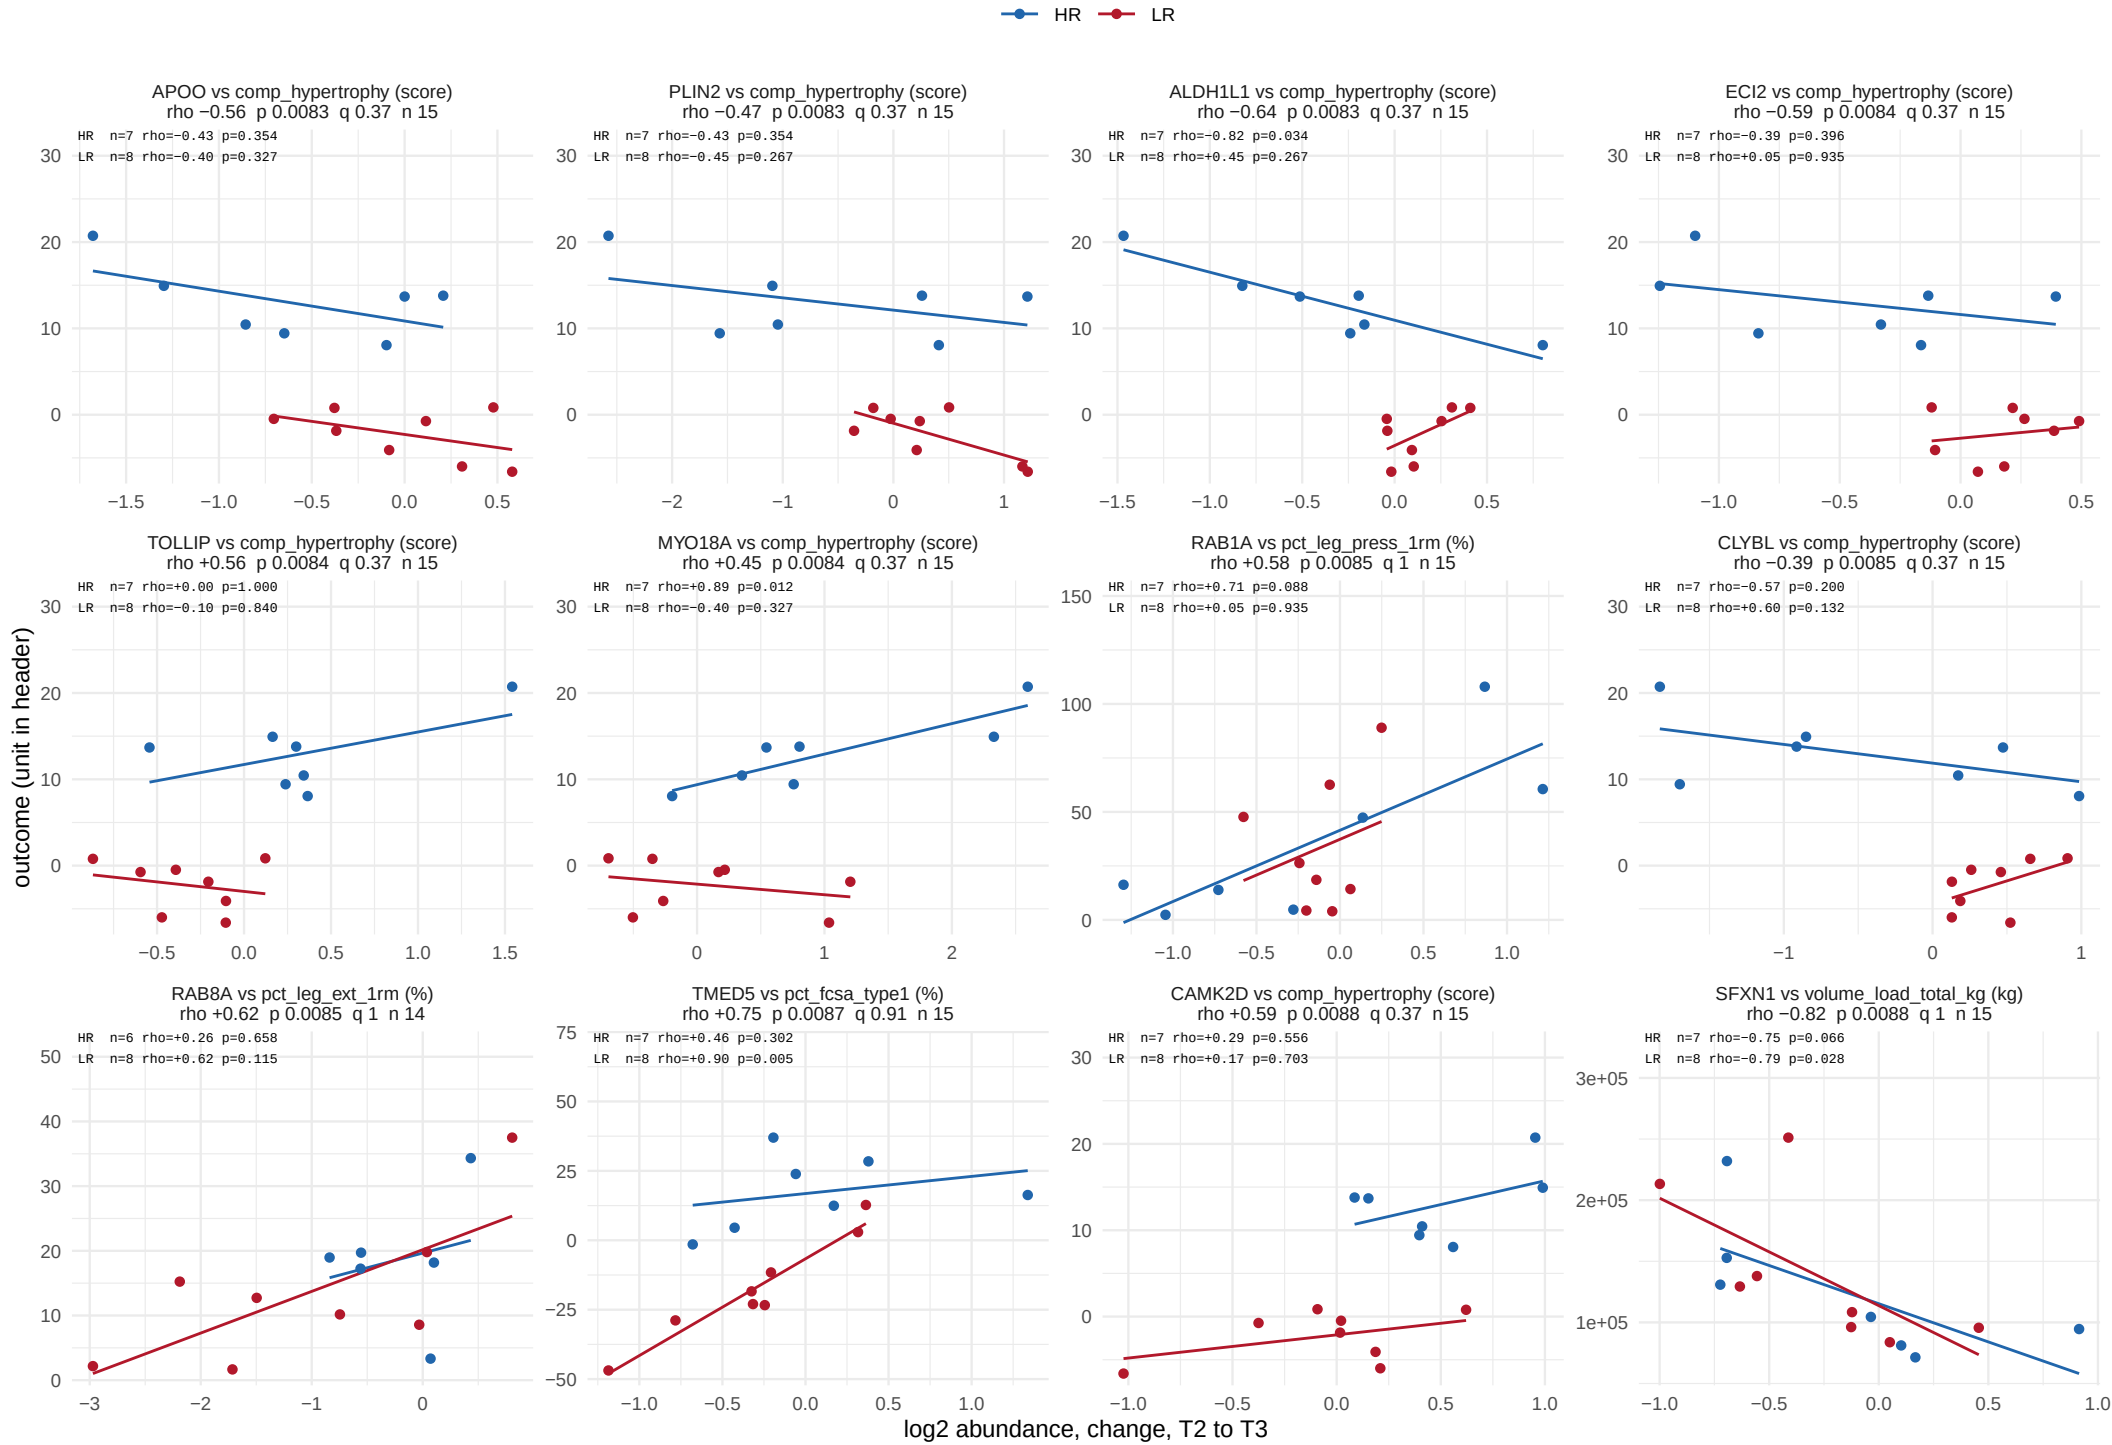

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


763 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 11 of 64.

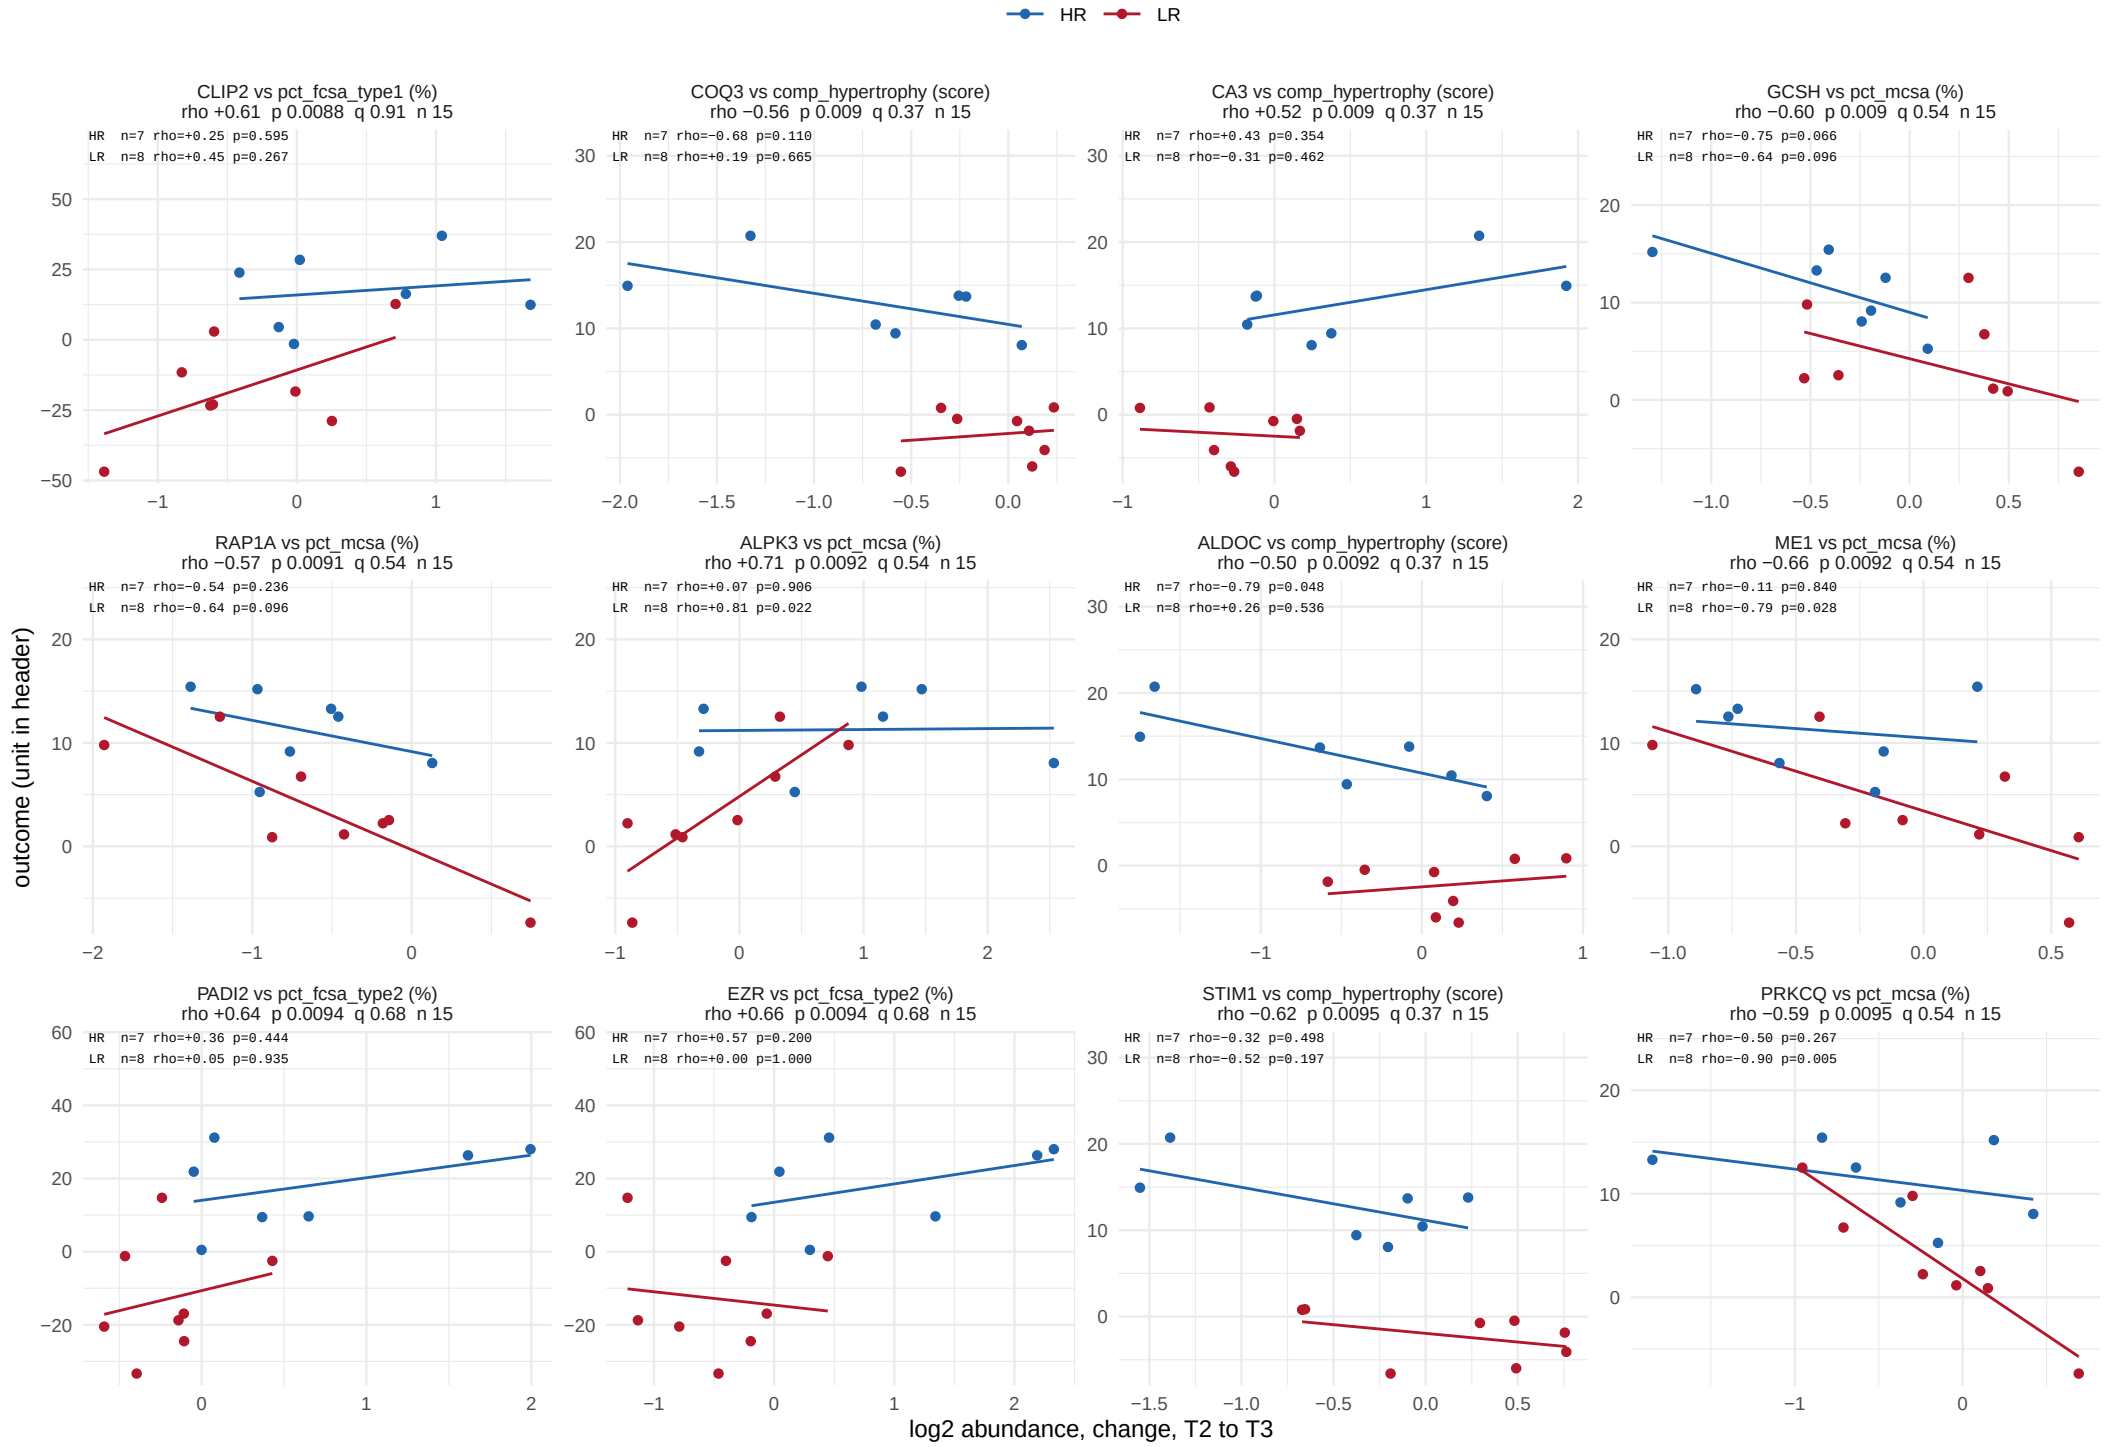

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


763 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 12 of 64.

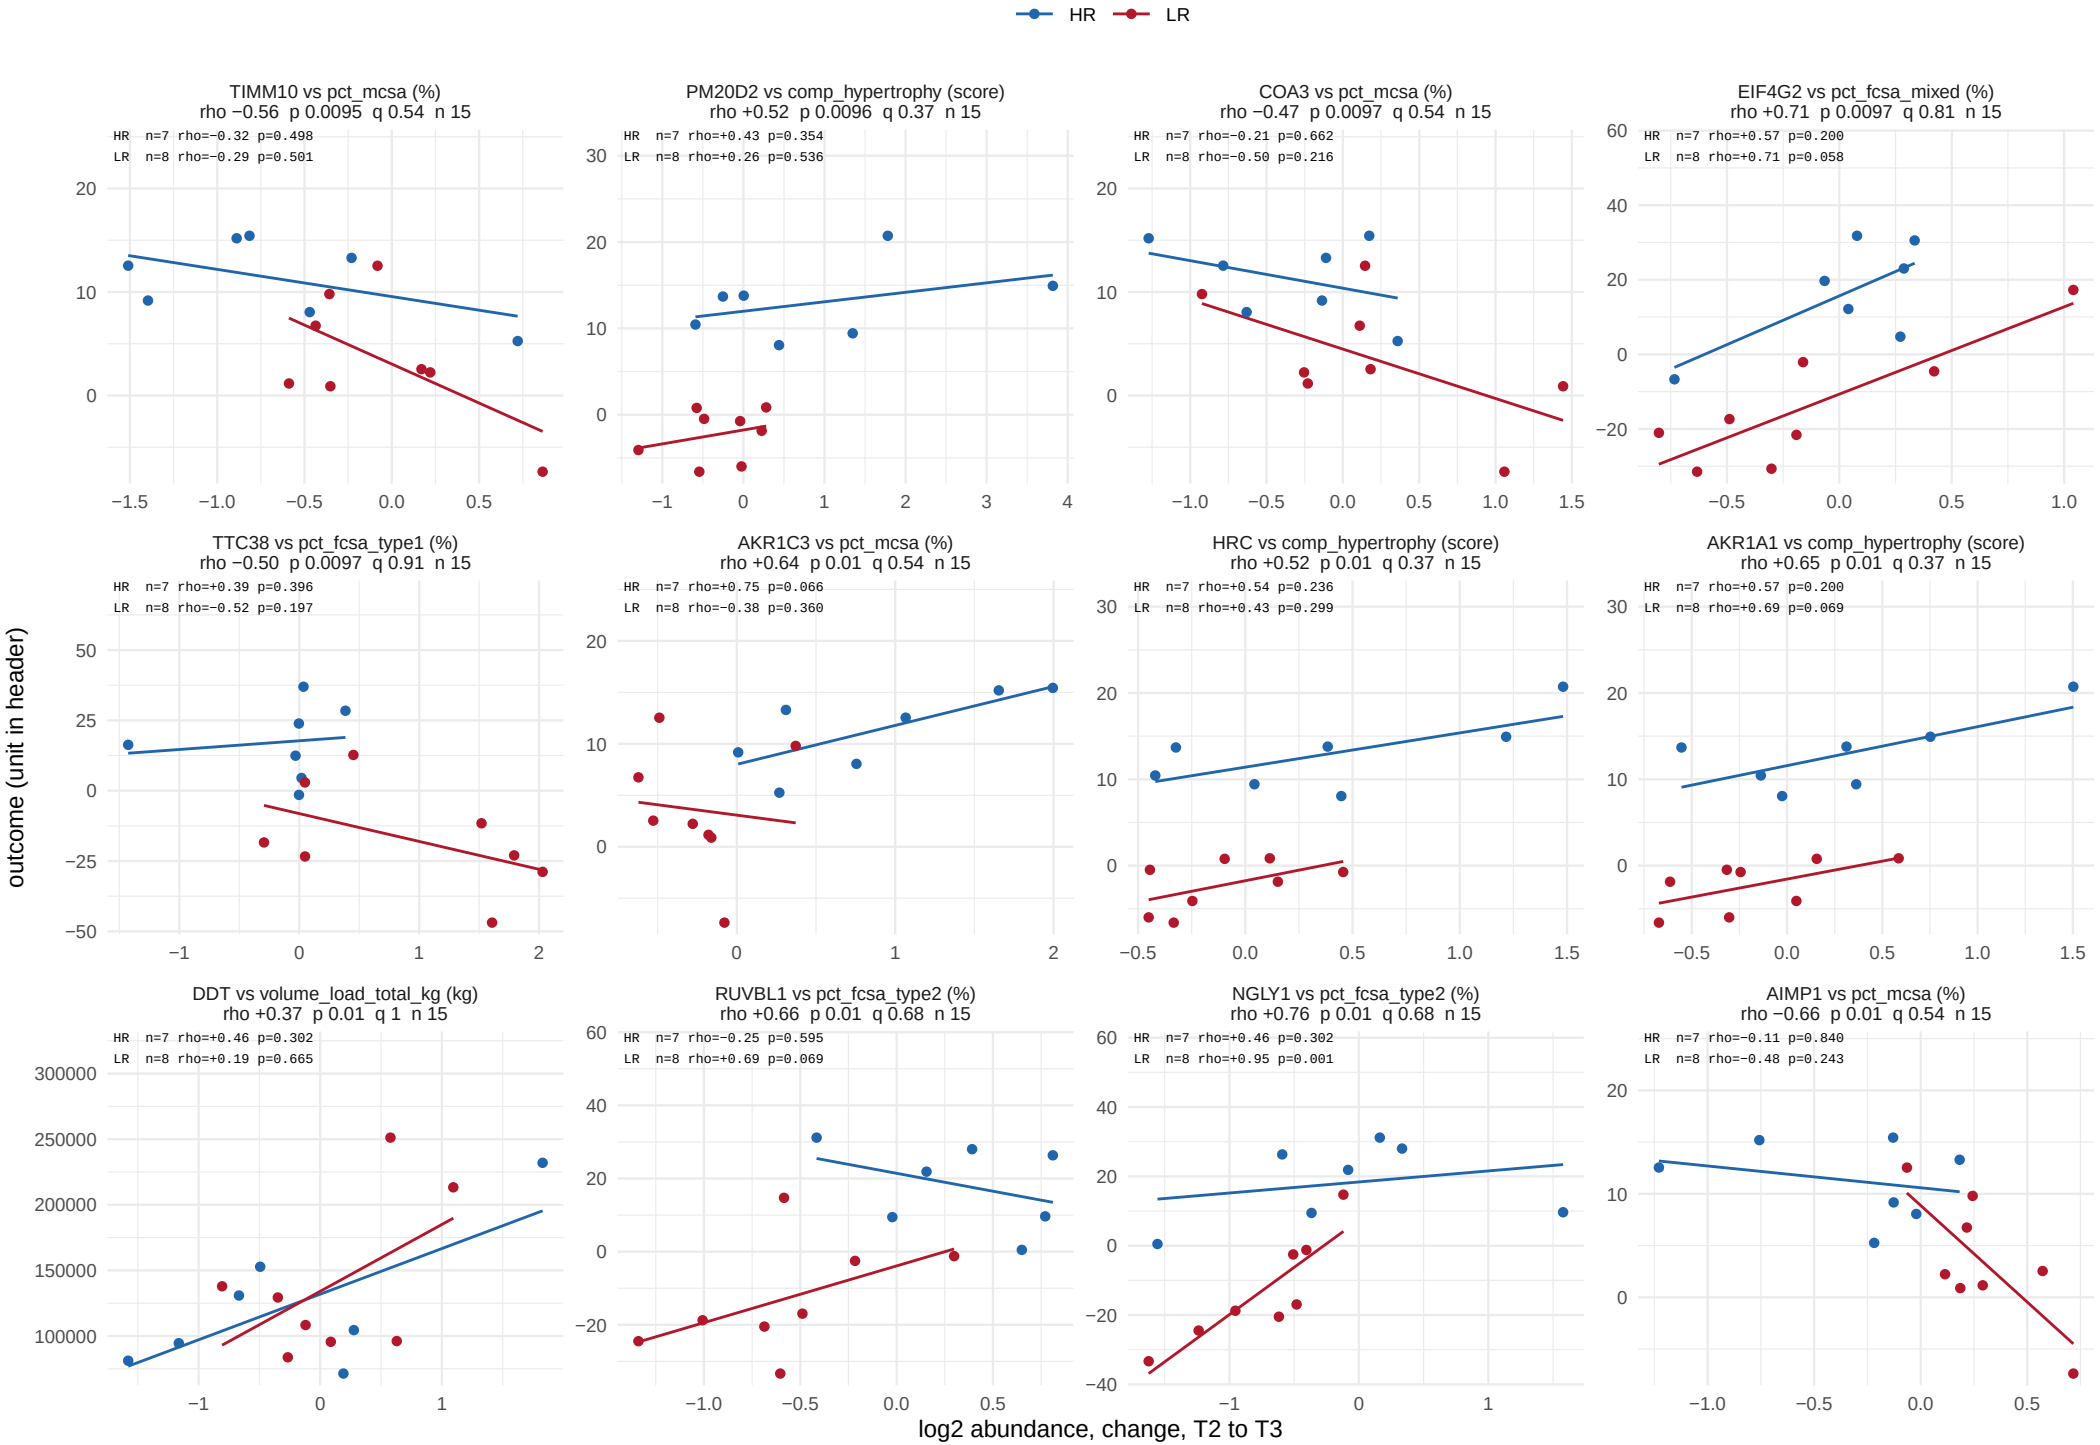

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


763 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 13 of 64.

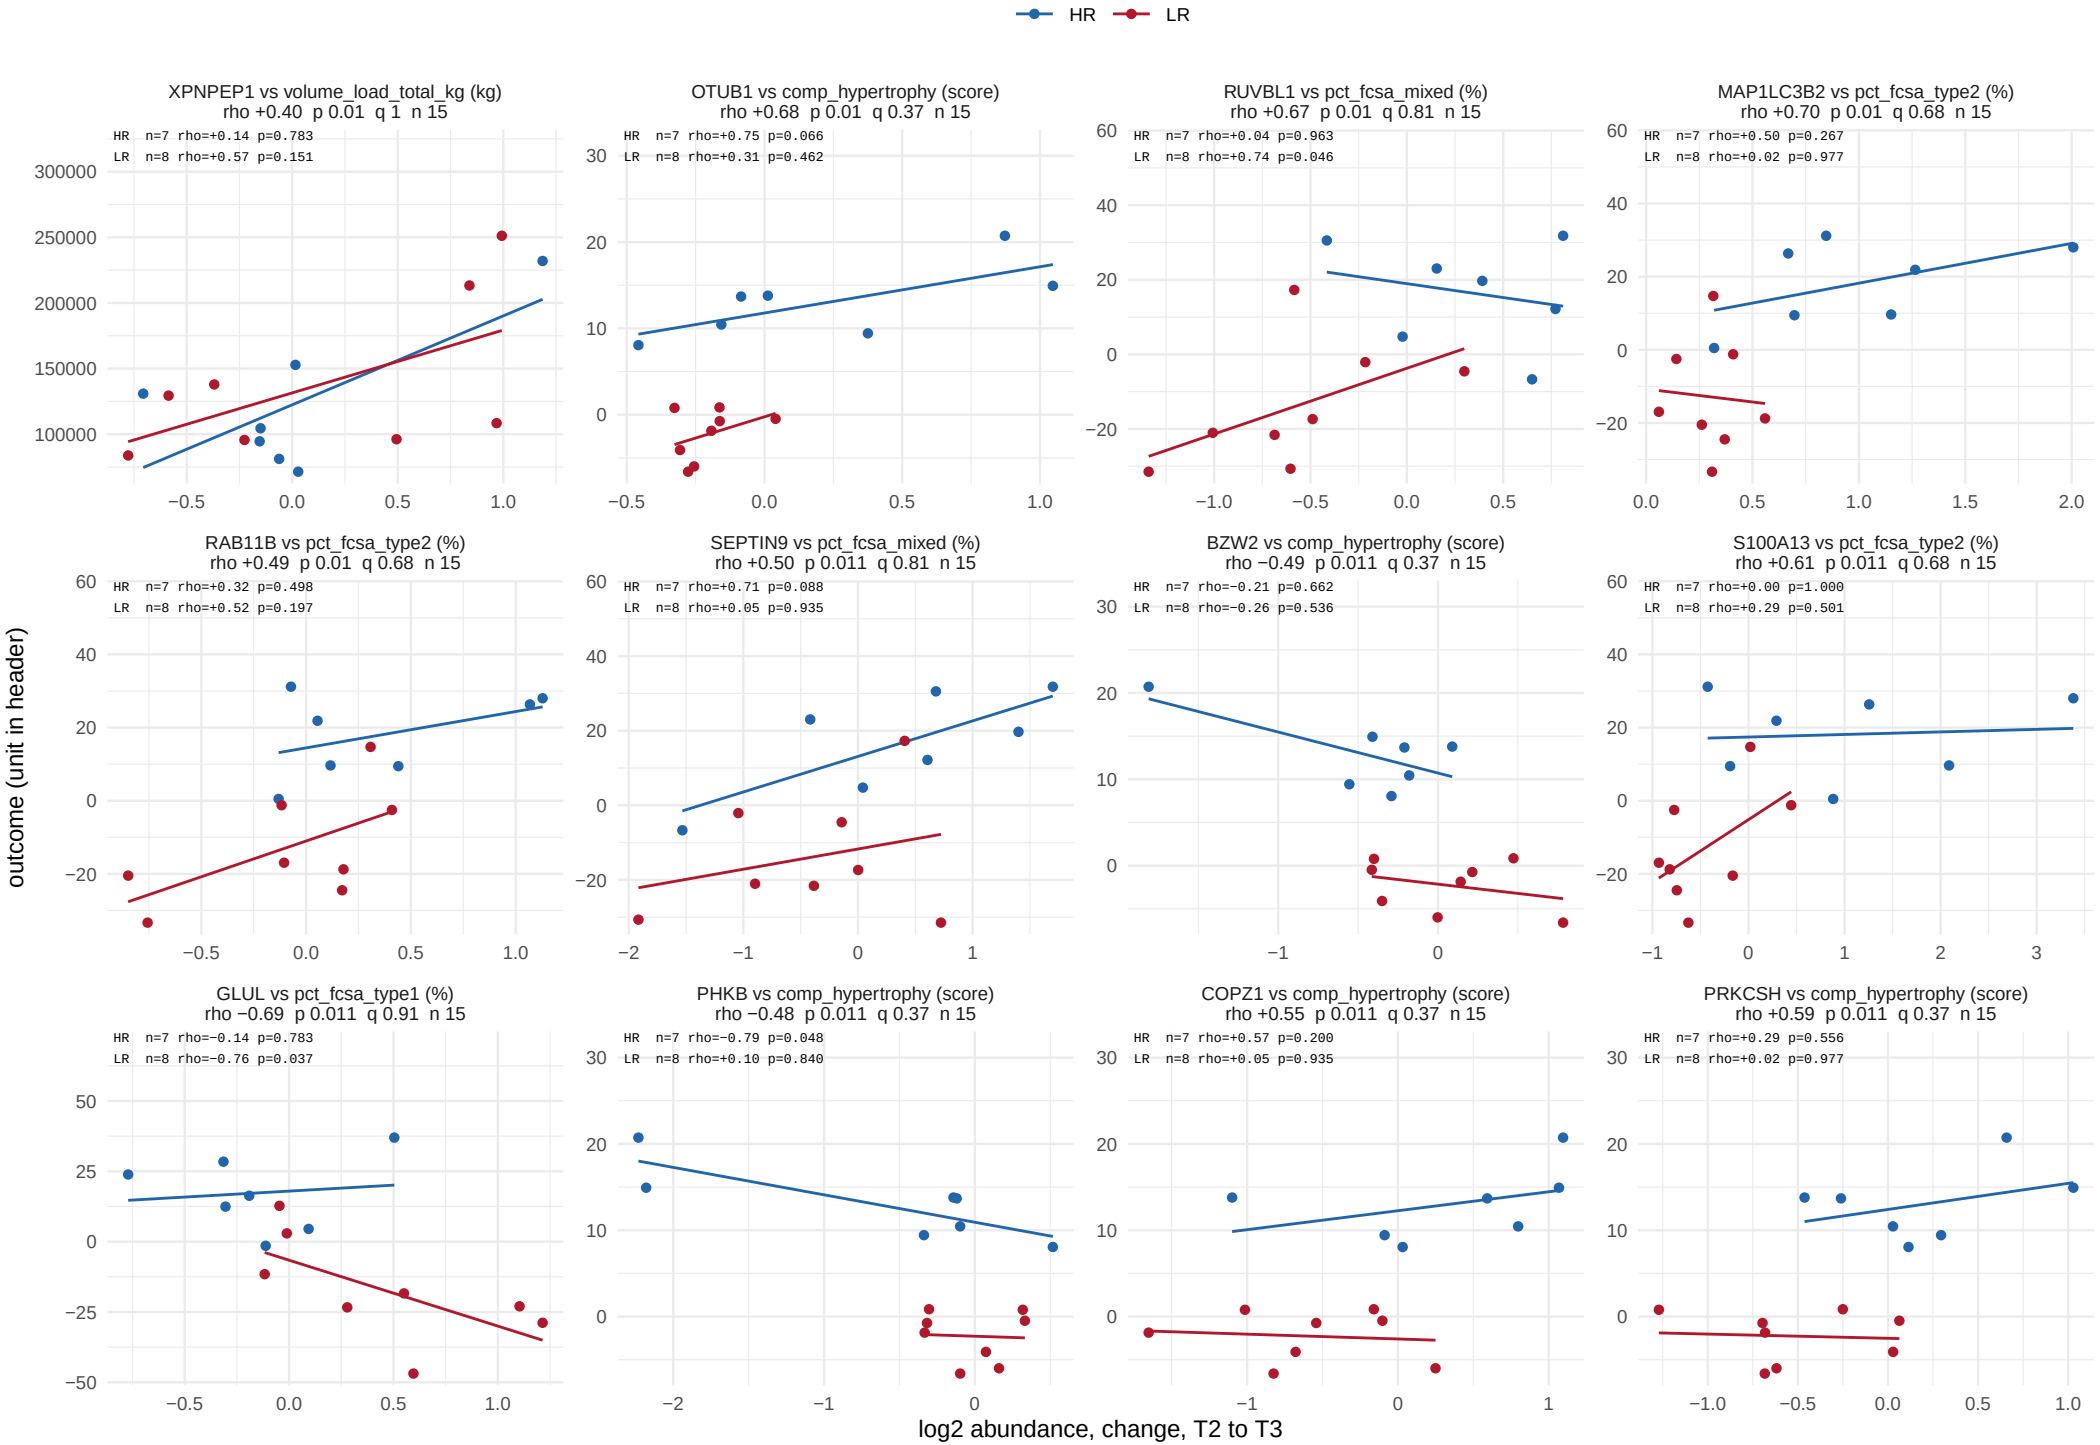

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window

763 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 14 of 64.

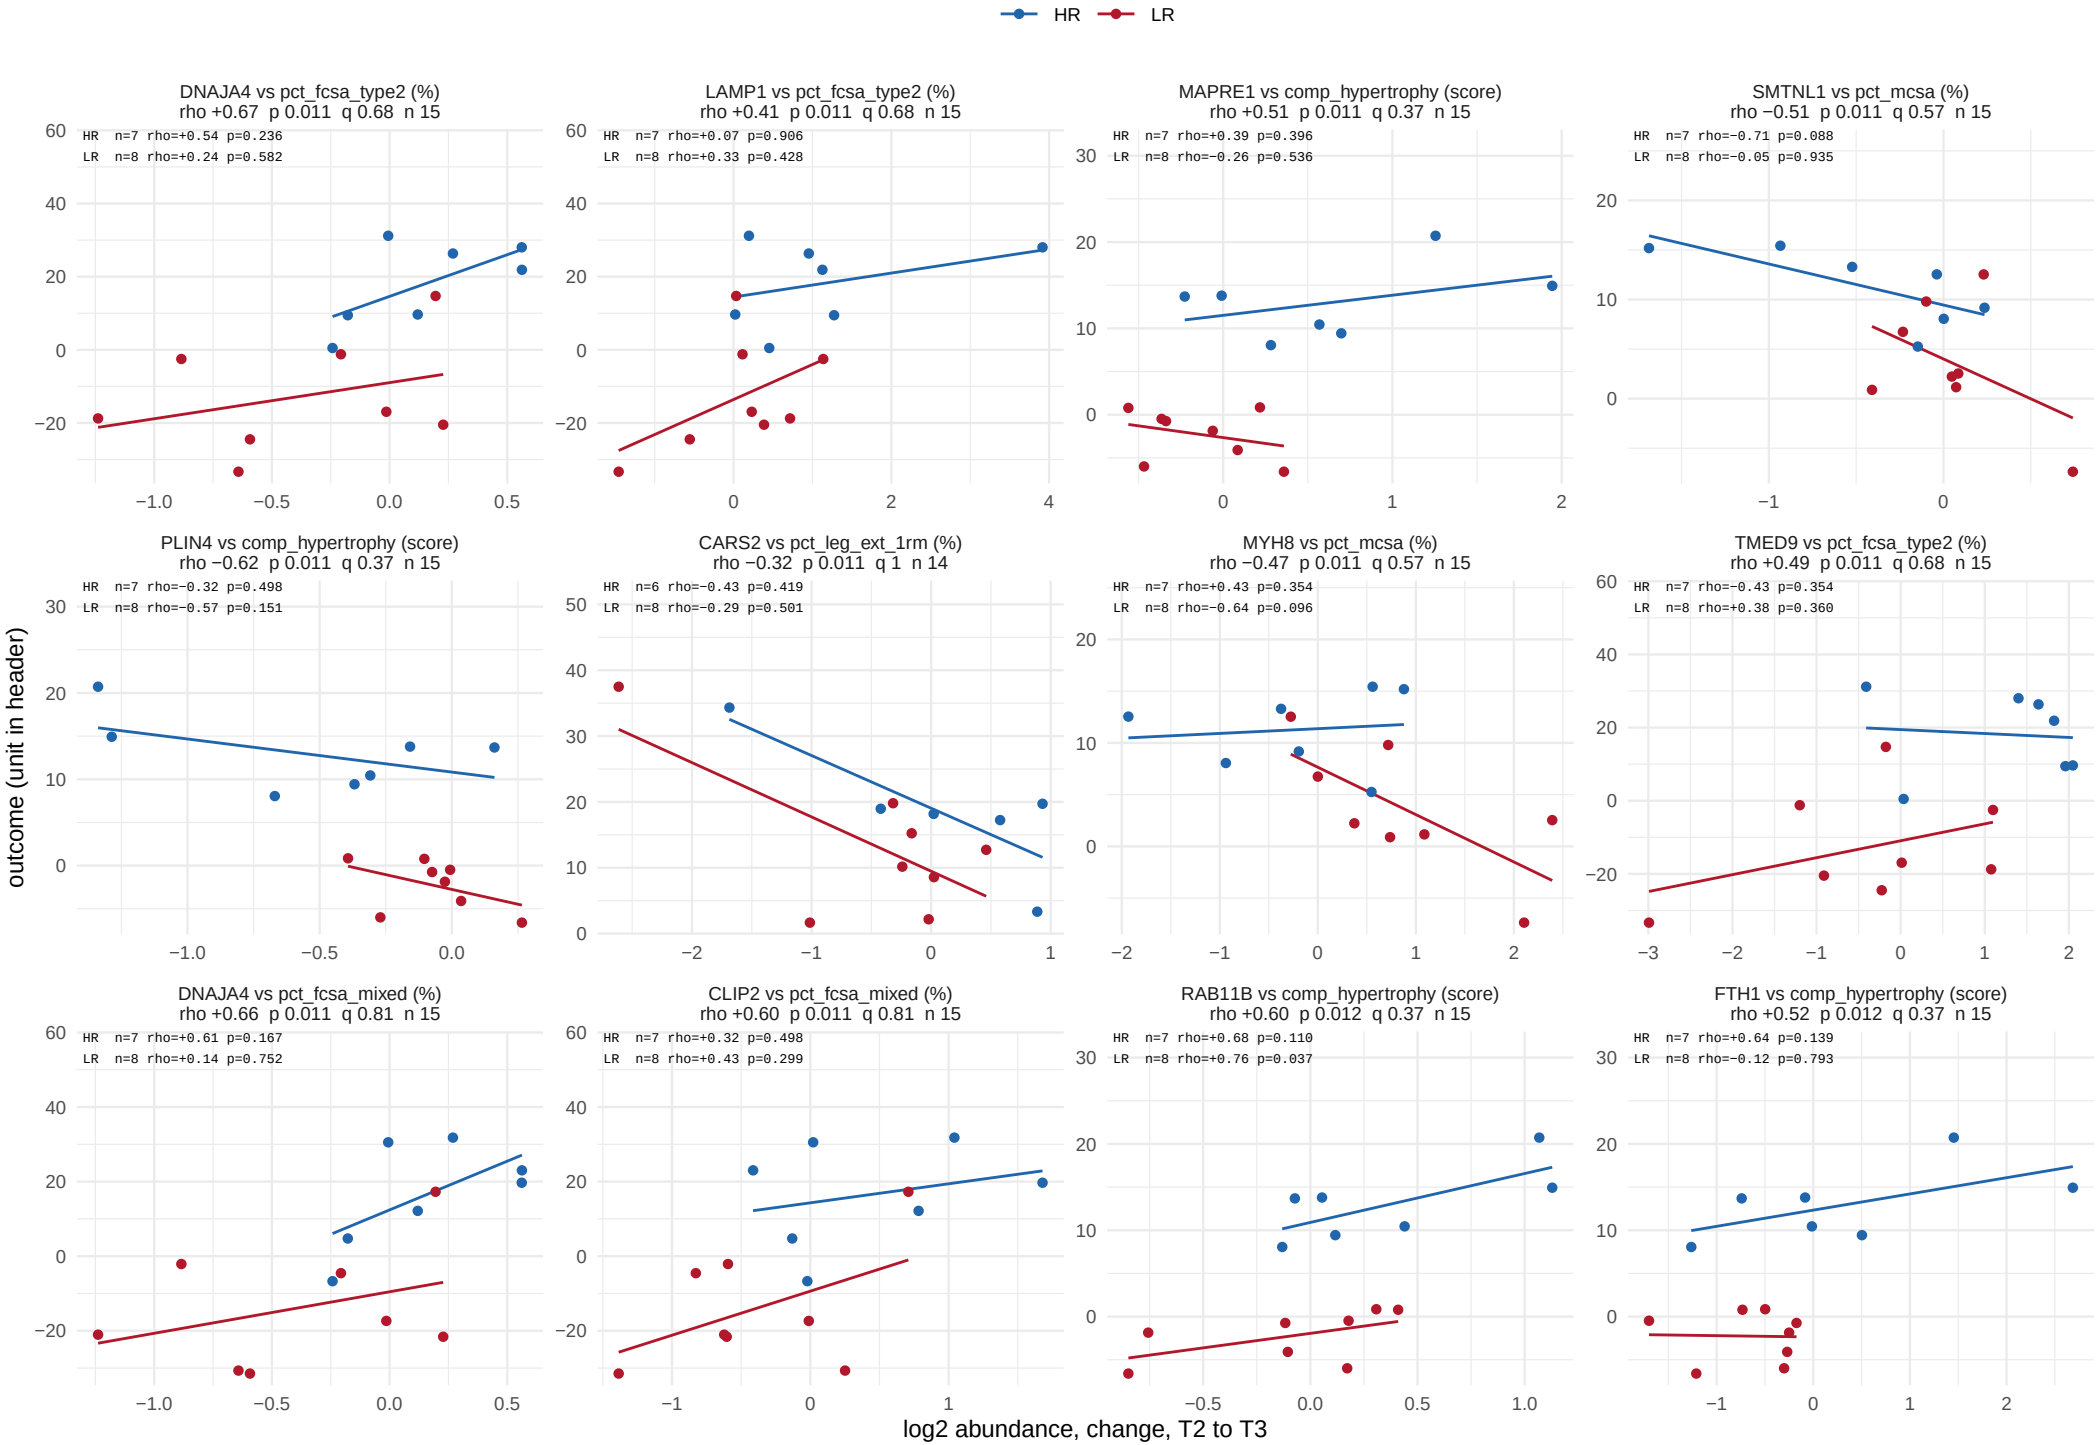

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


763 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 15 of 64.



One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


763 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 16 of 64.

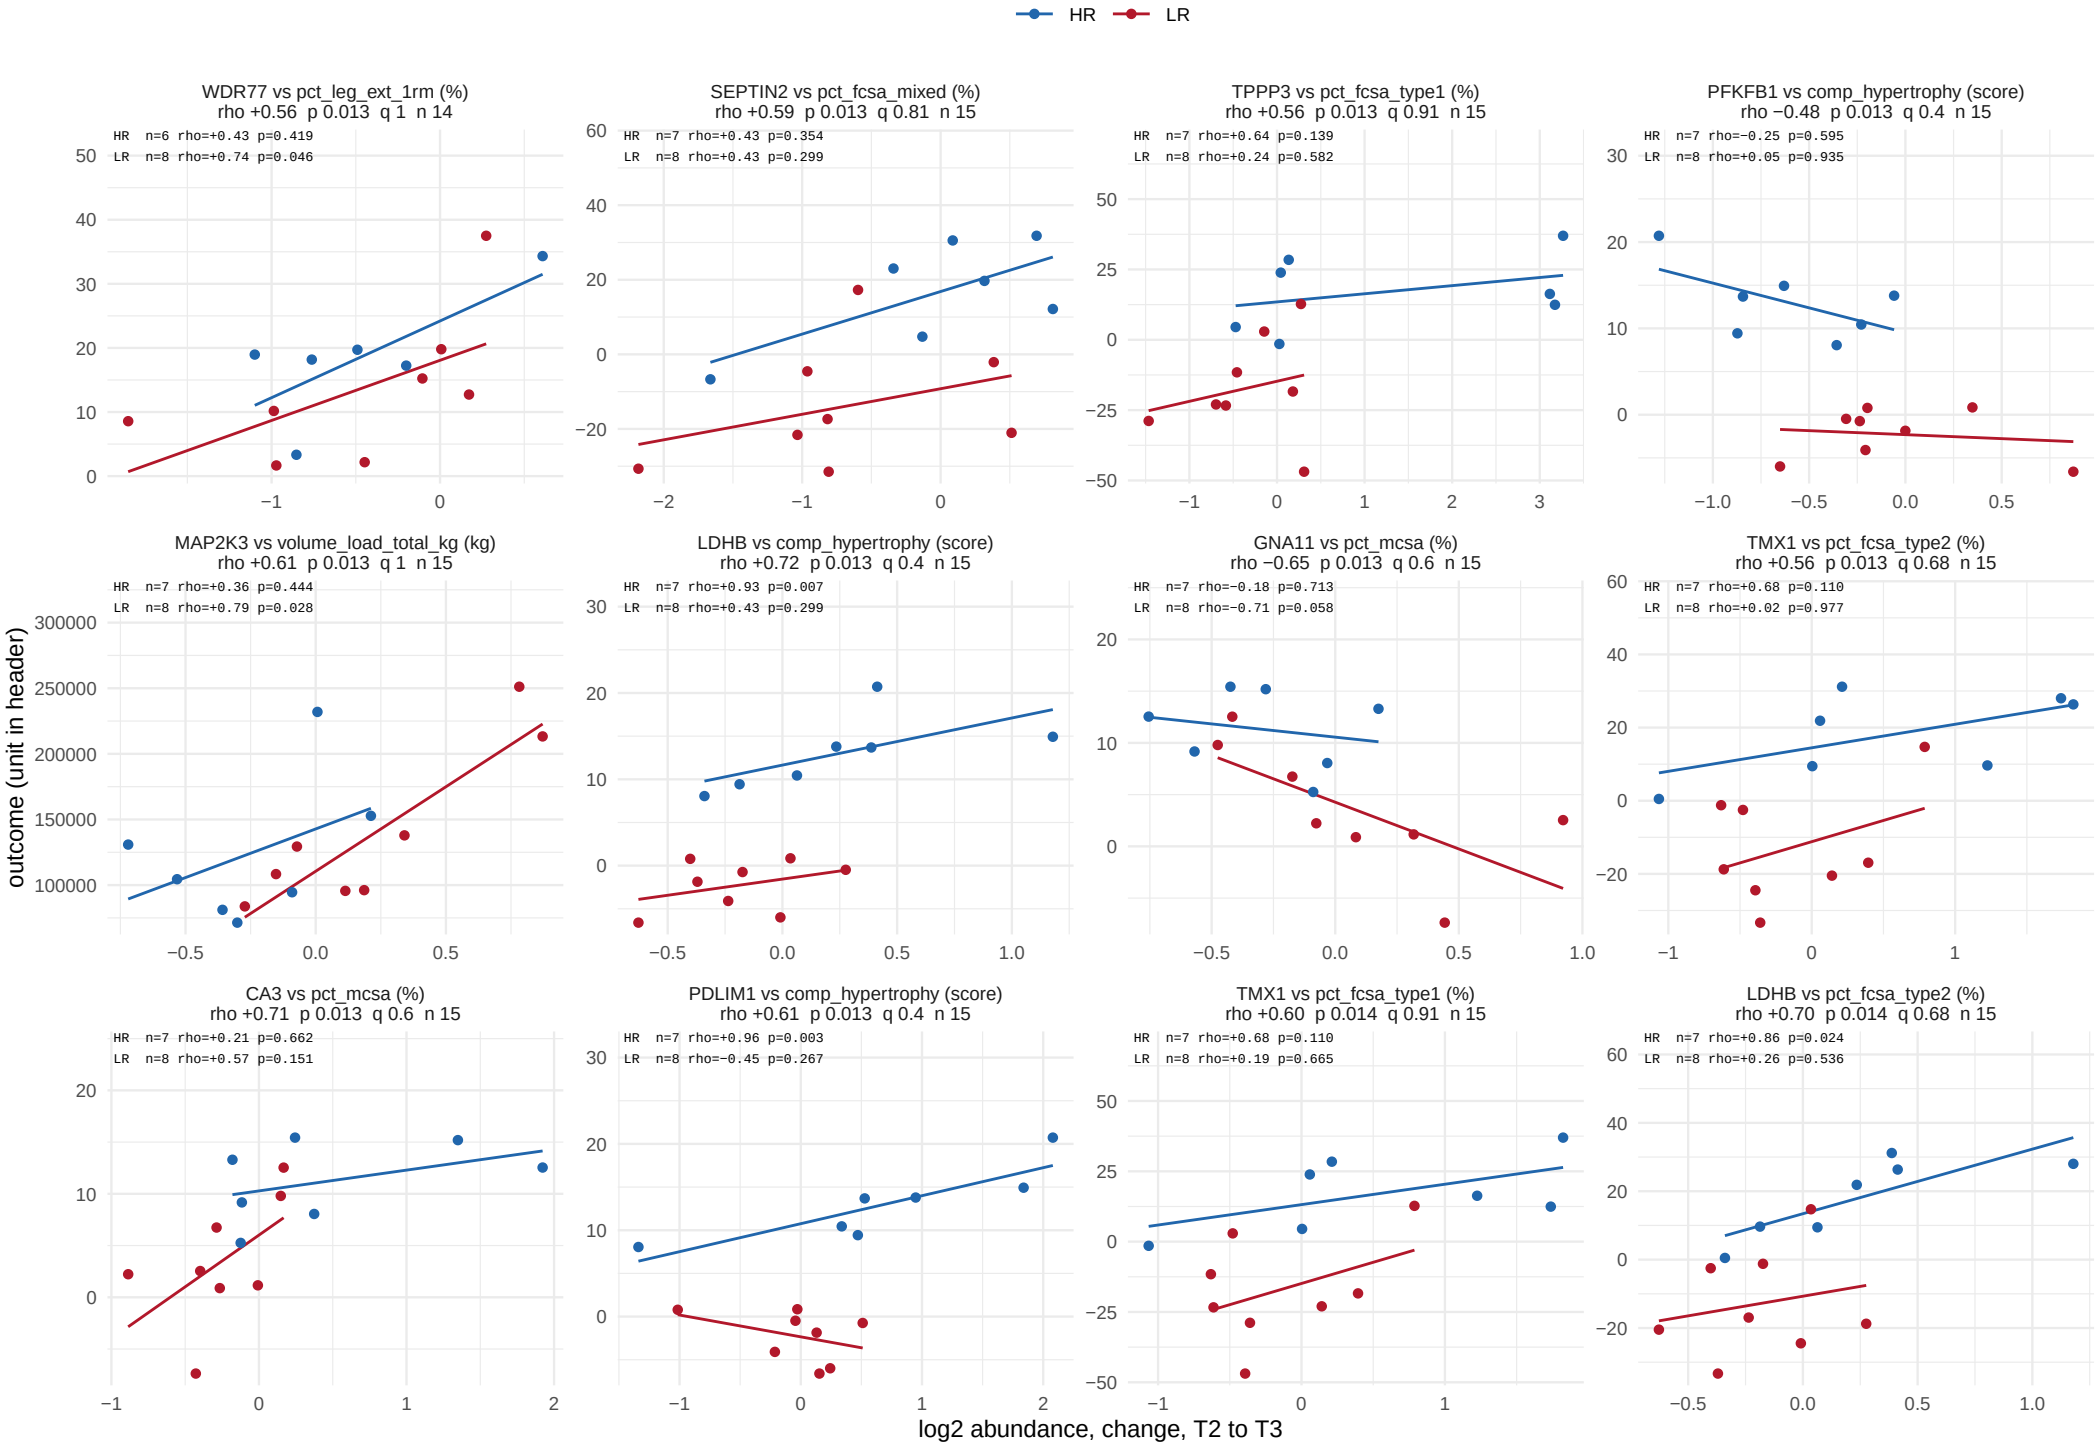

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


763 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 17 of 64.

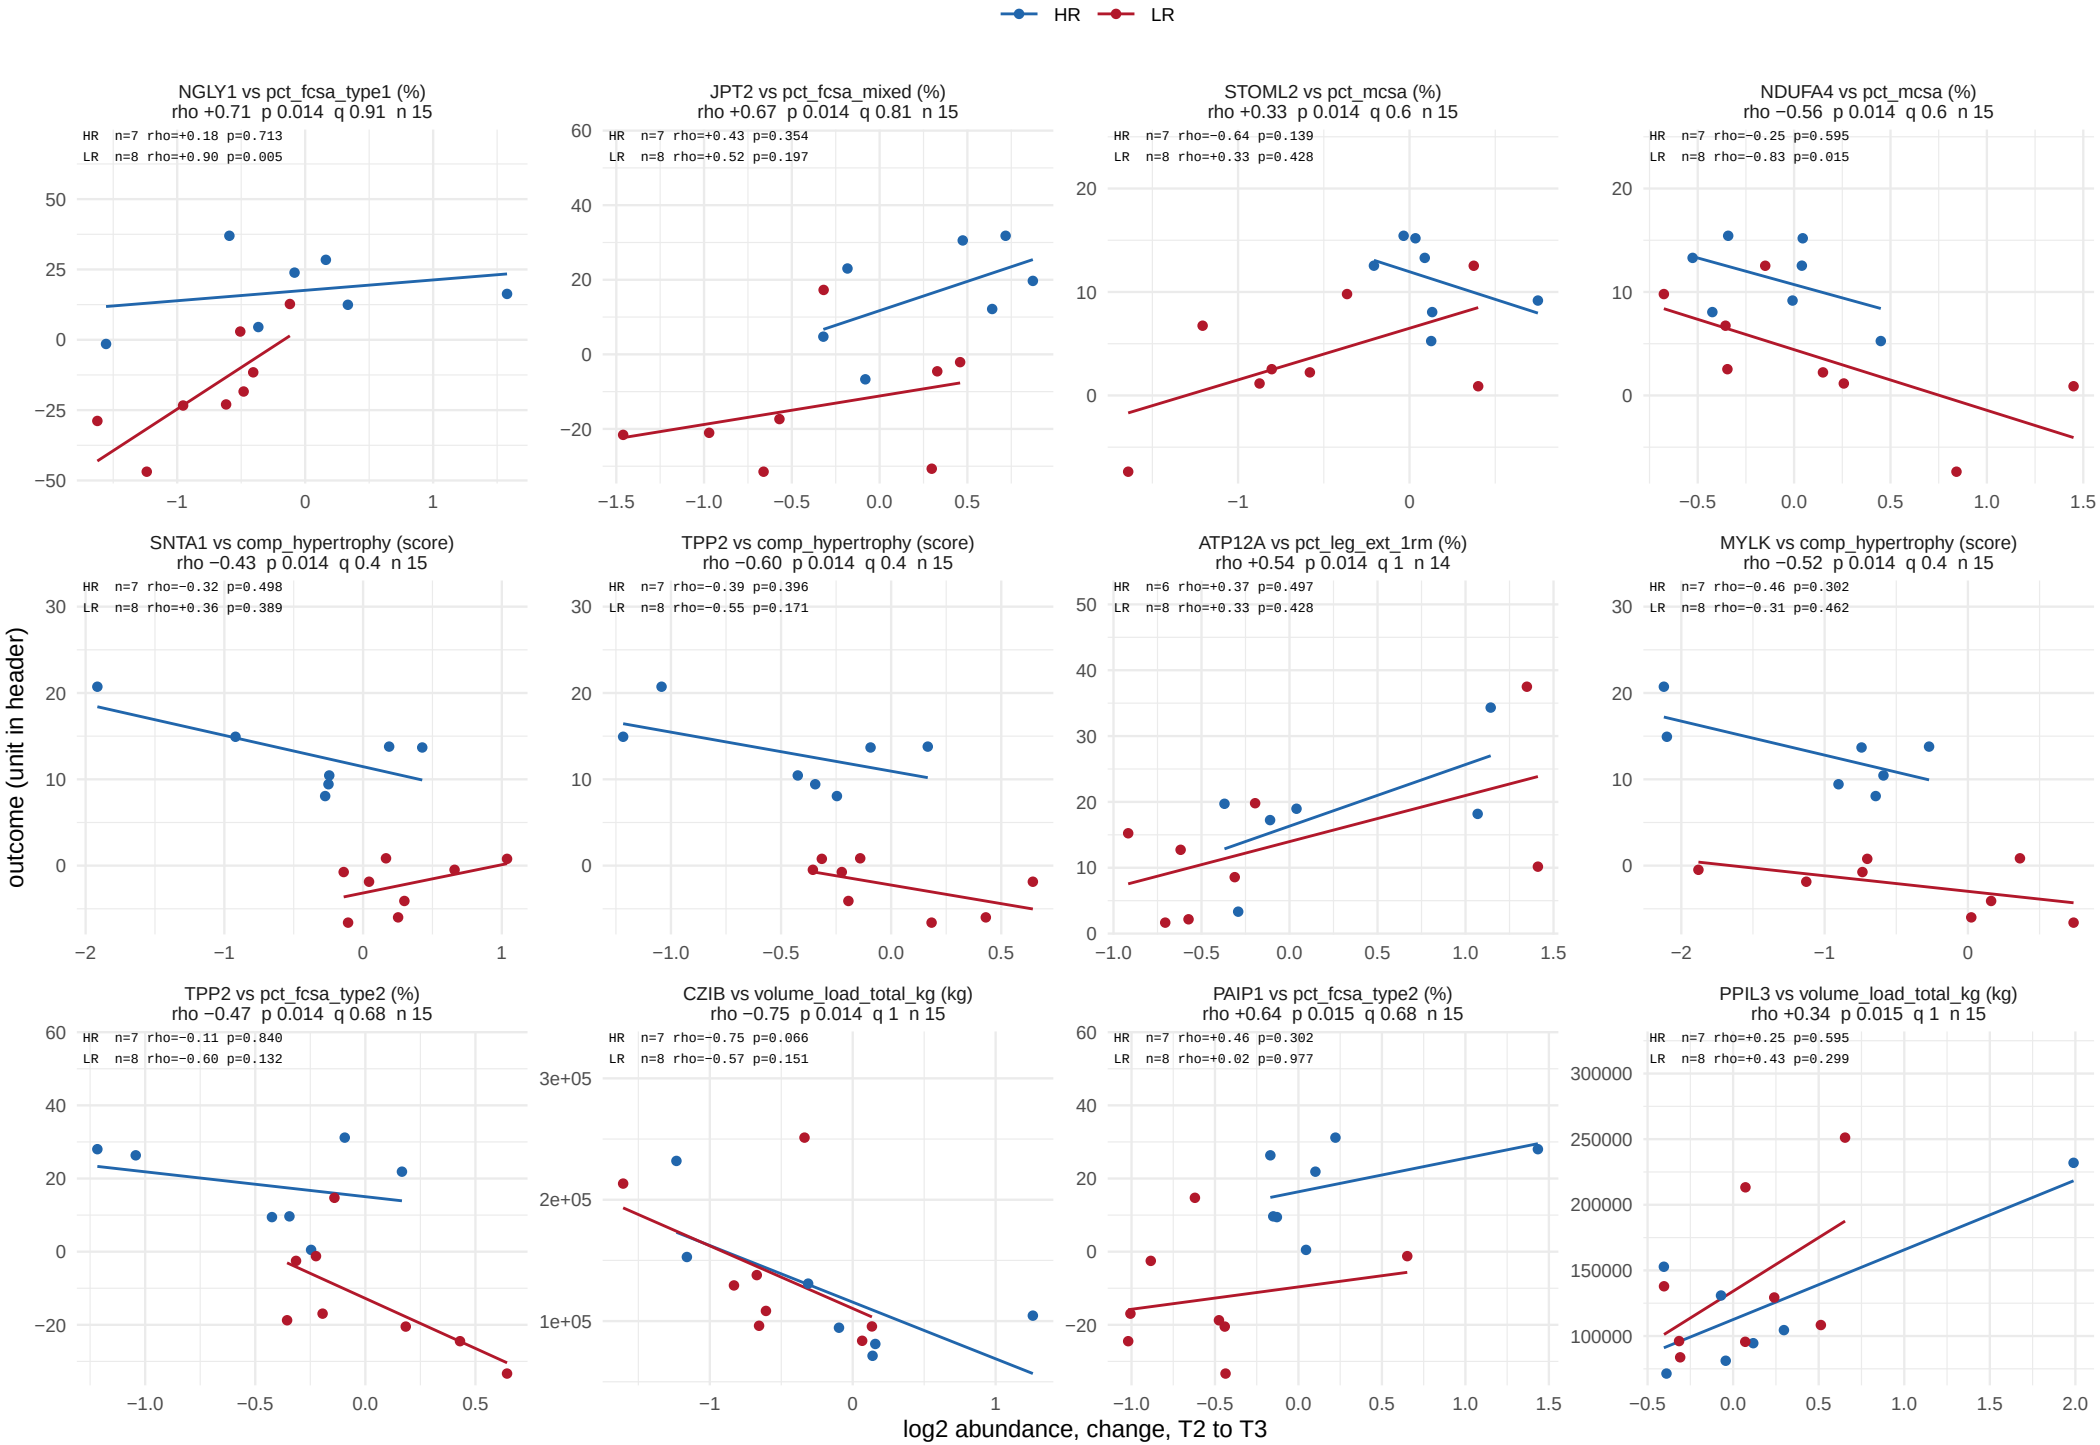

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


763 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 18 of 64.

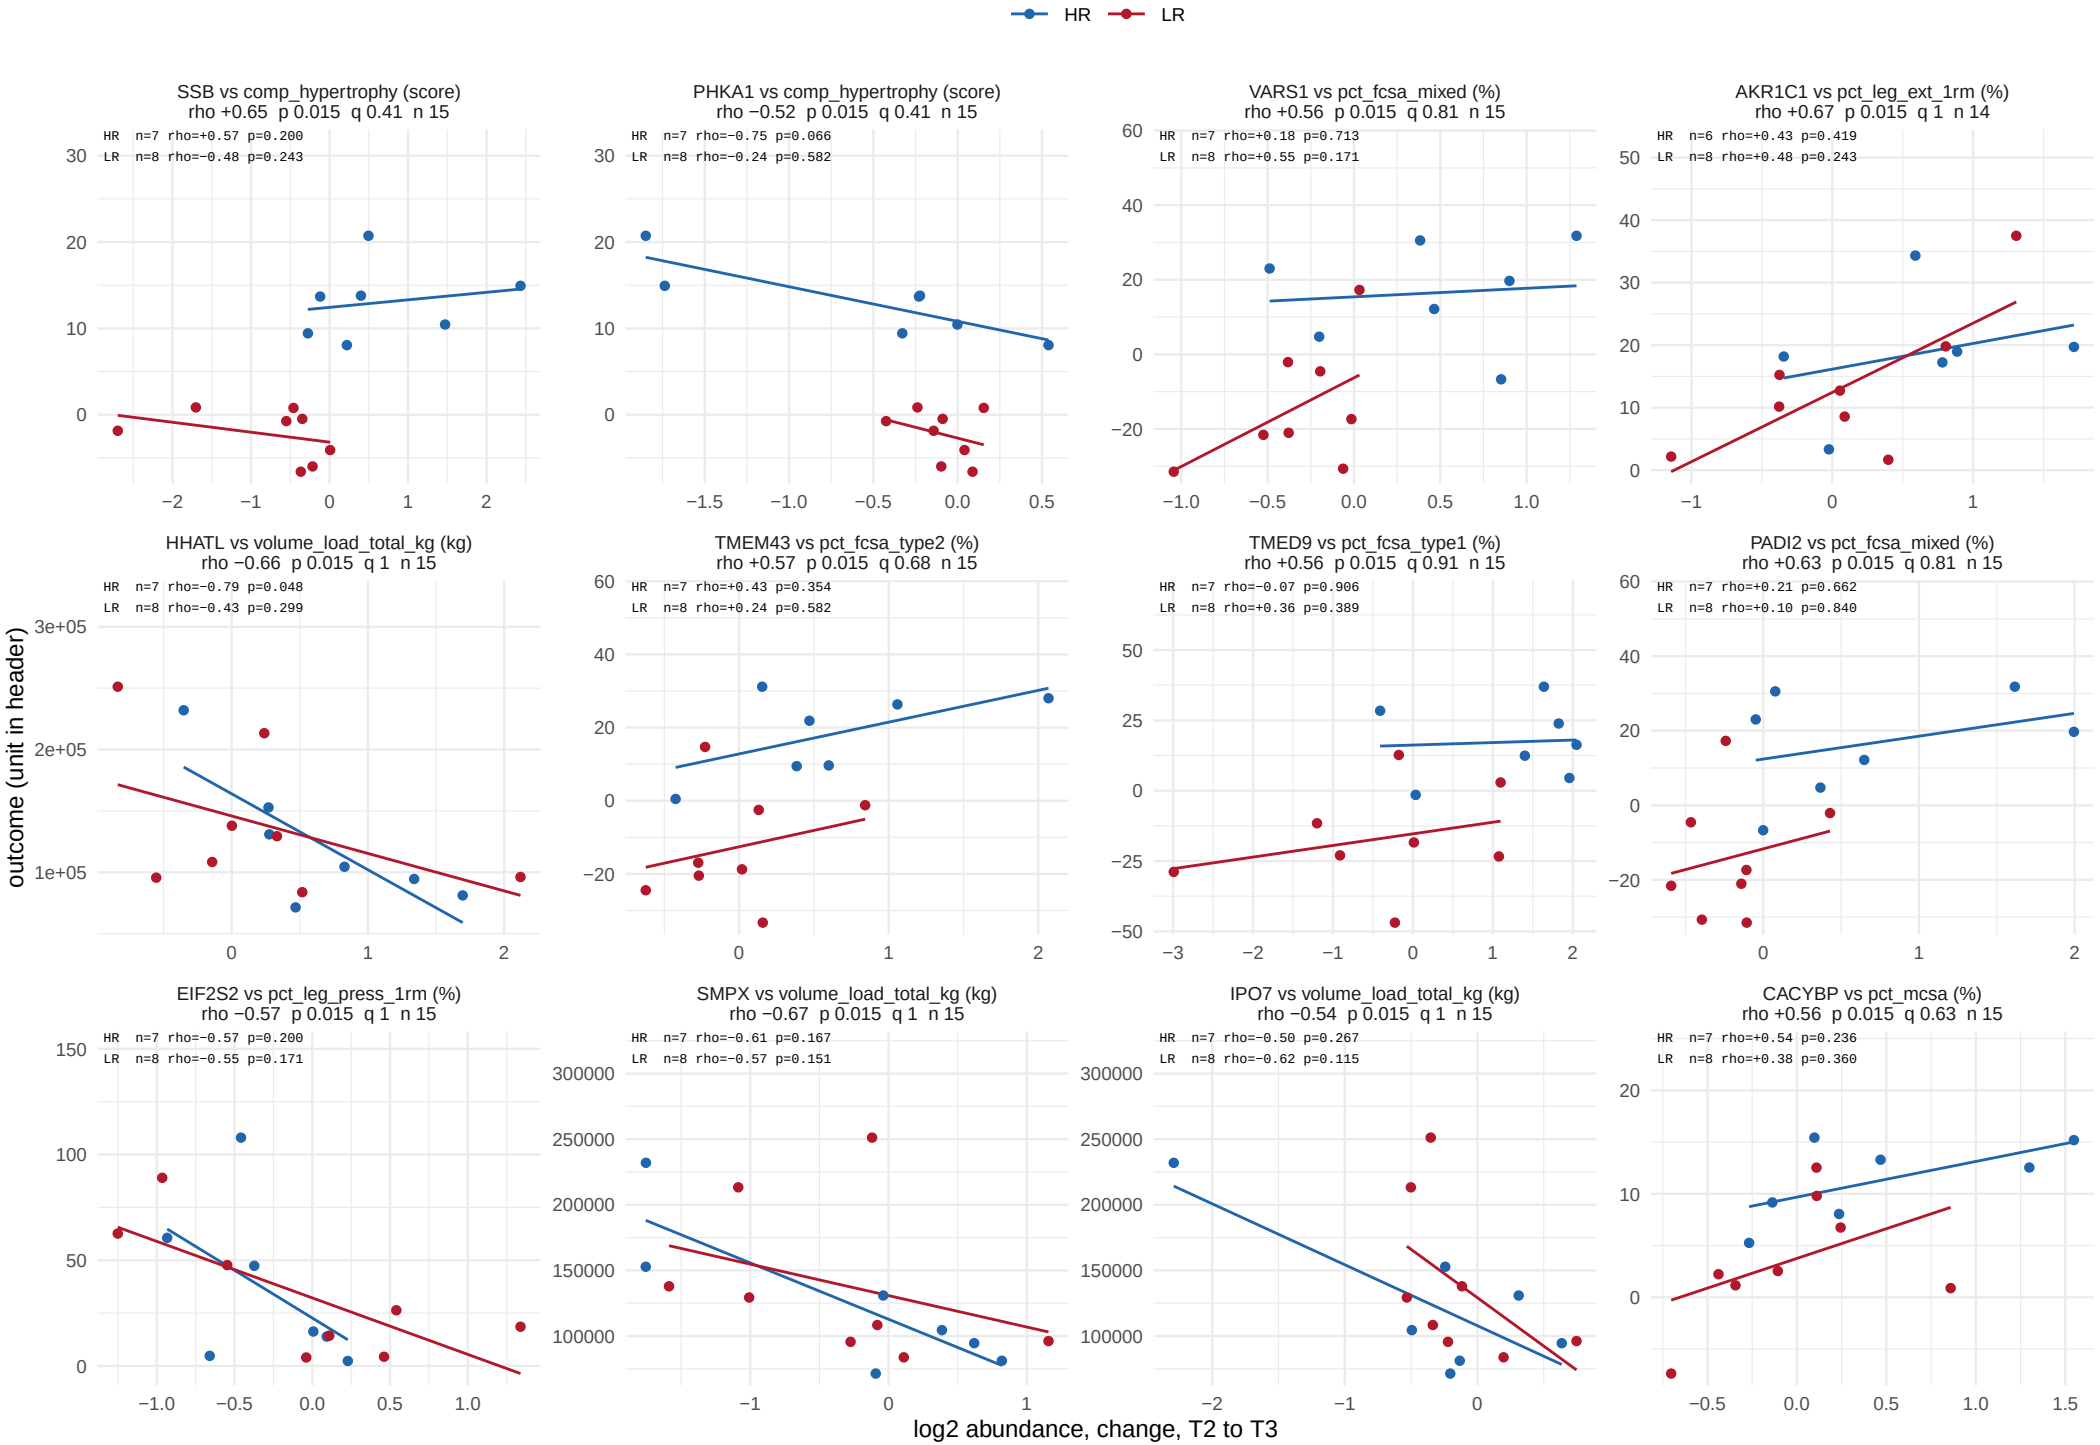

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


763 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 19 of 64.

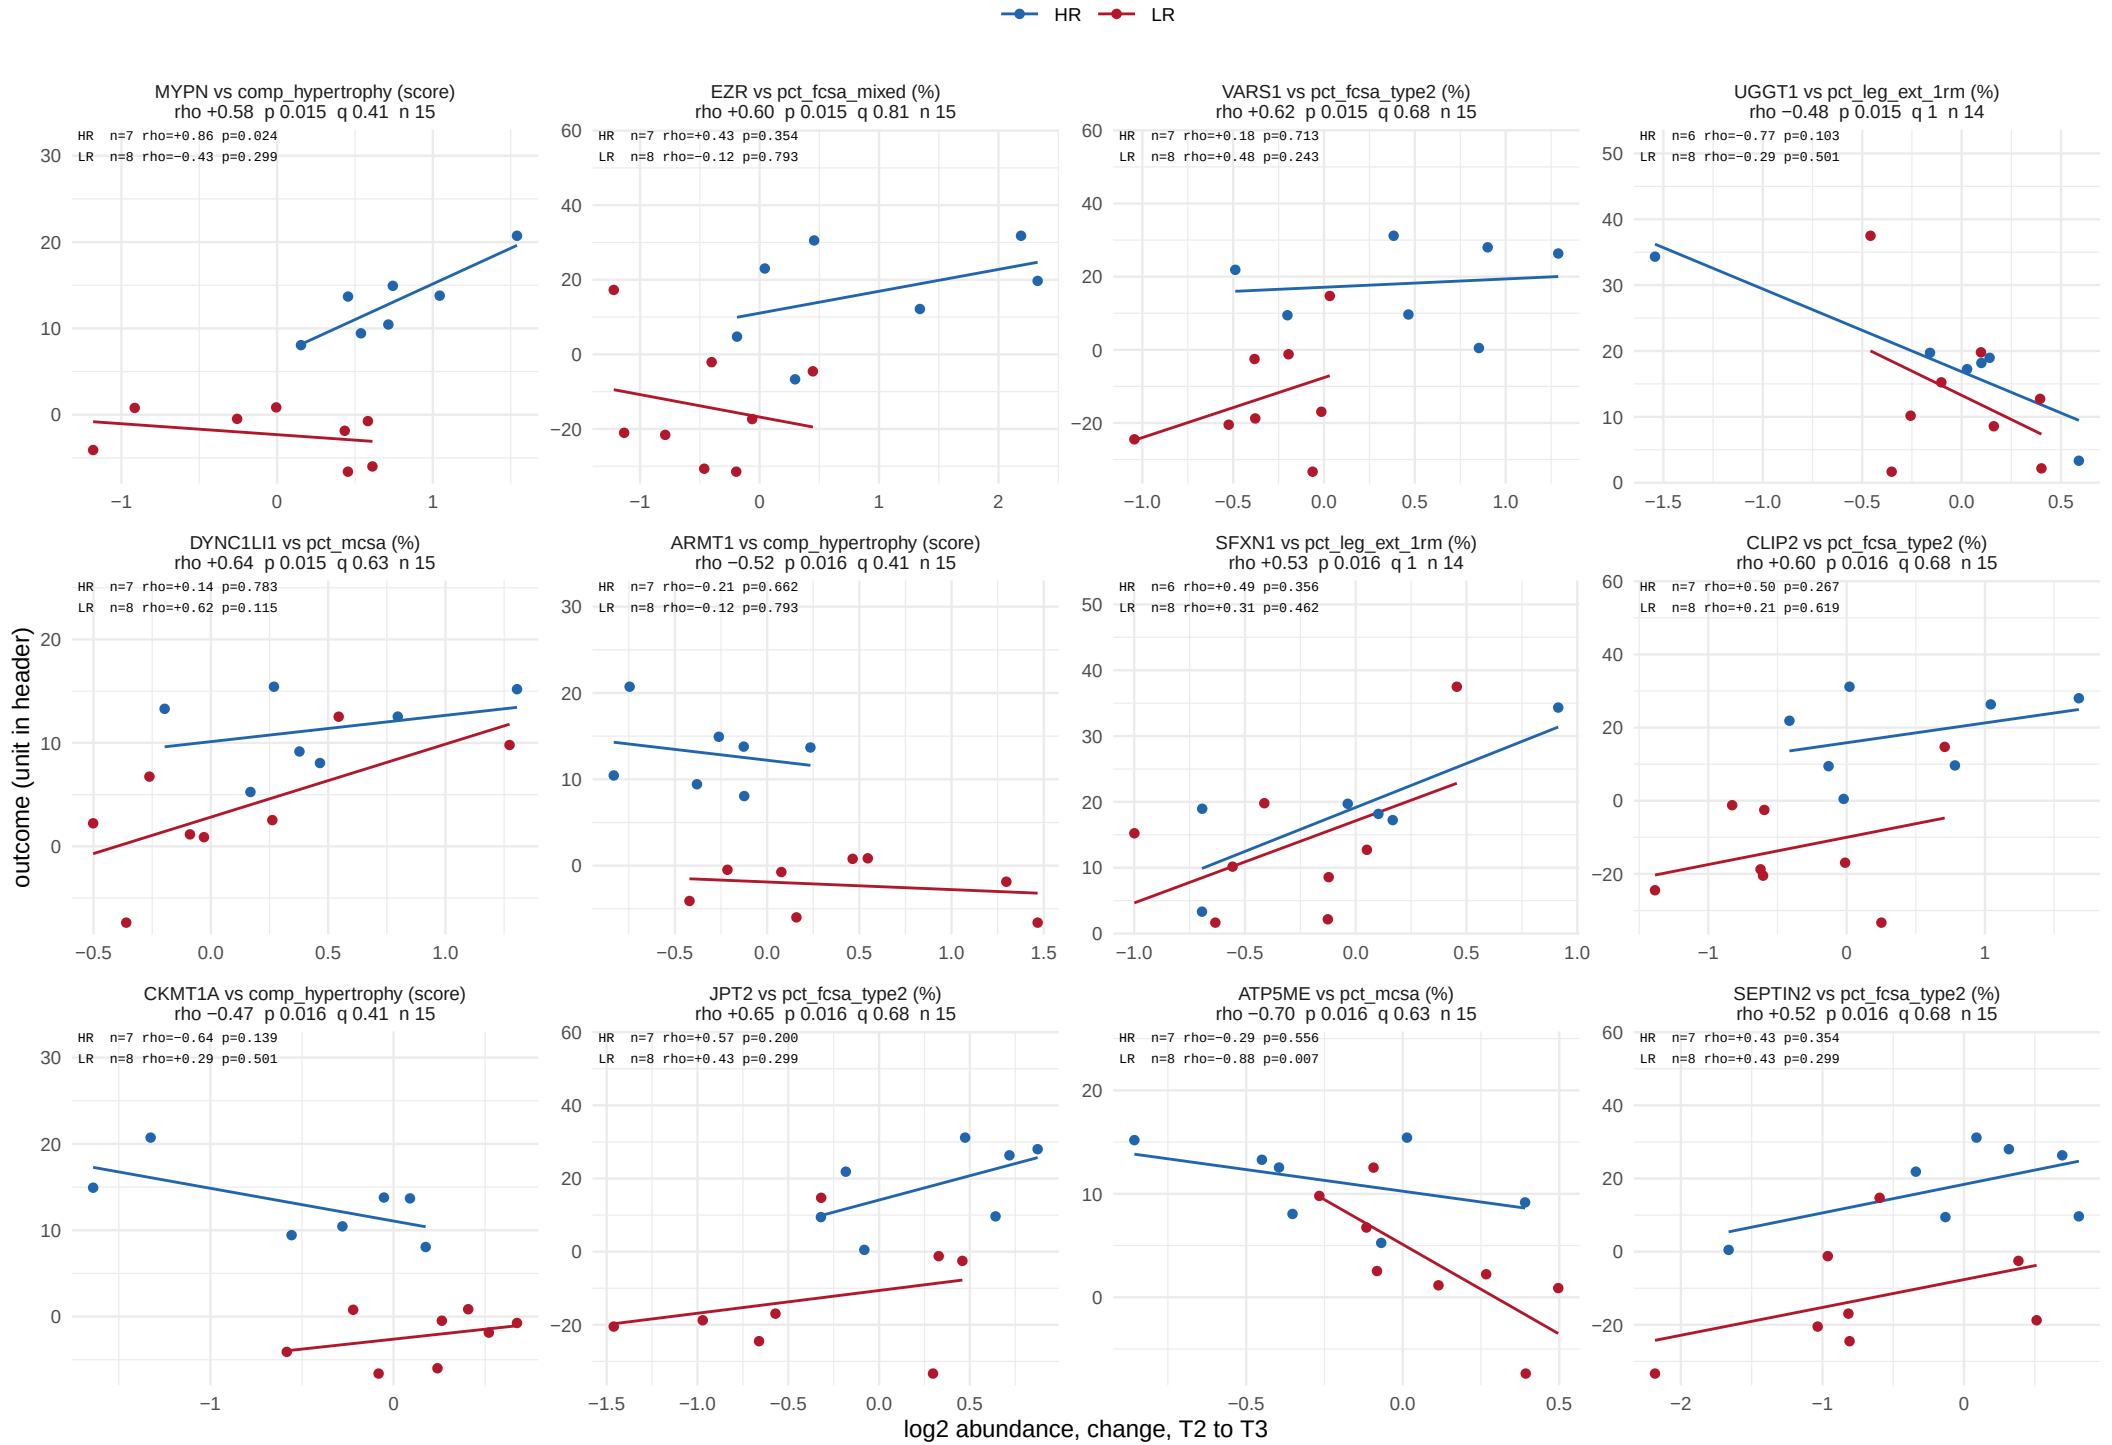

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


763 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 20 of 64.

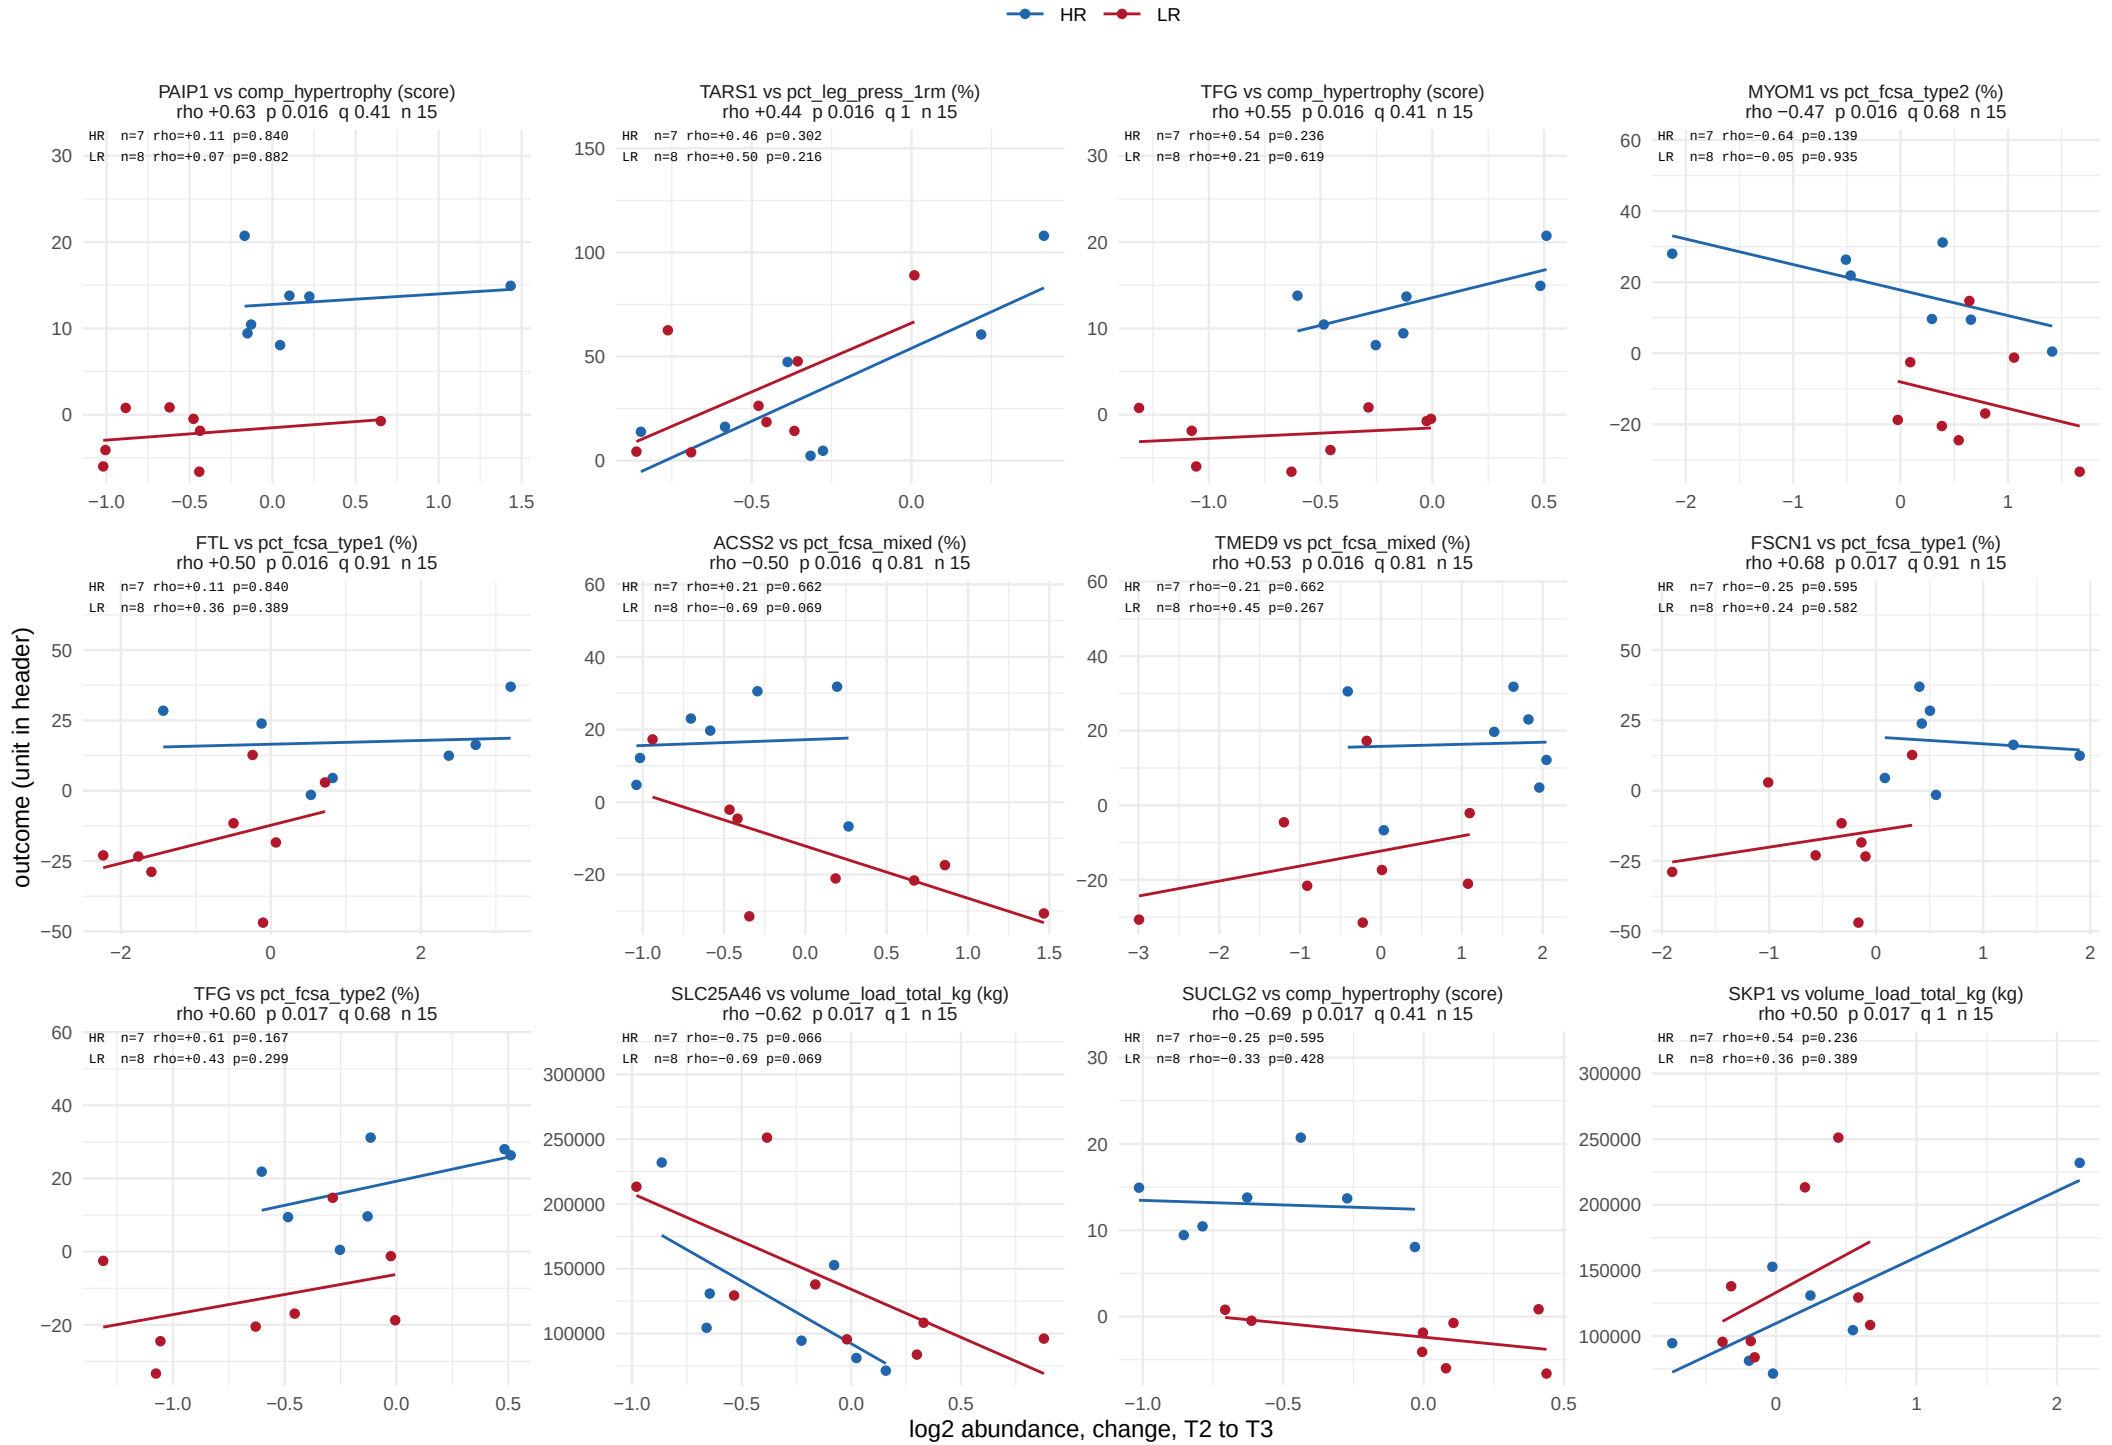

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


763 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 21 of 64.

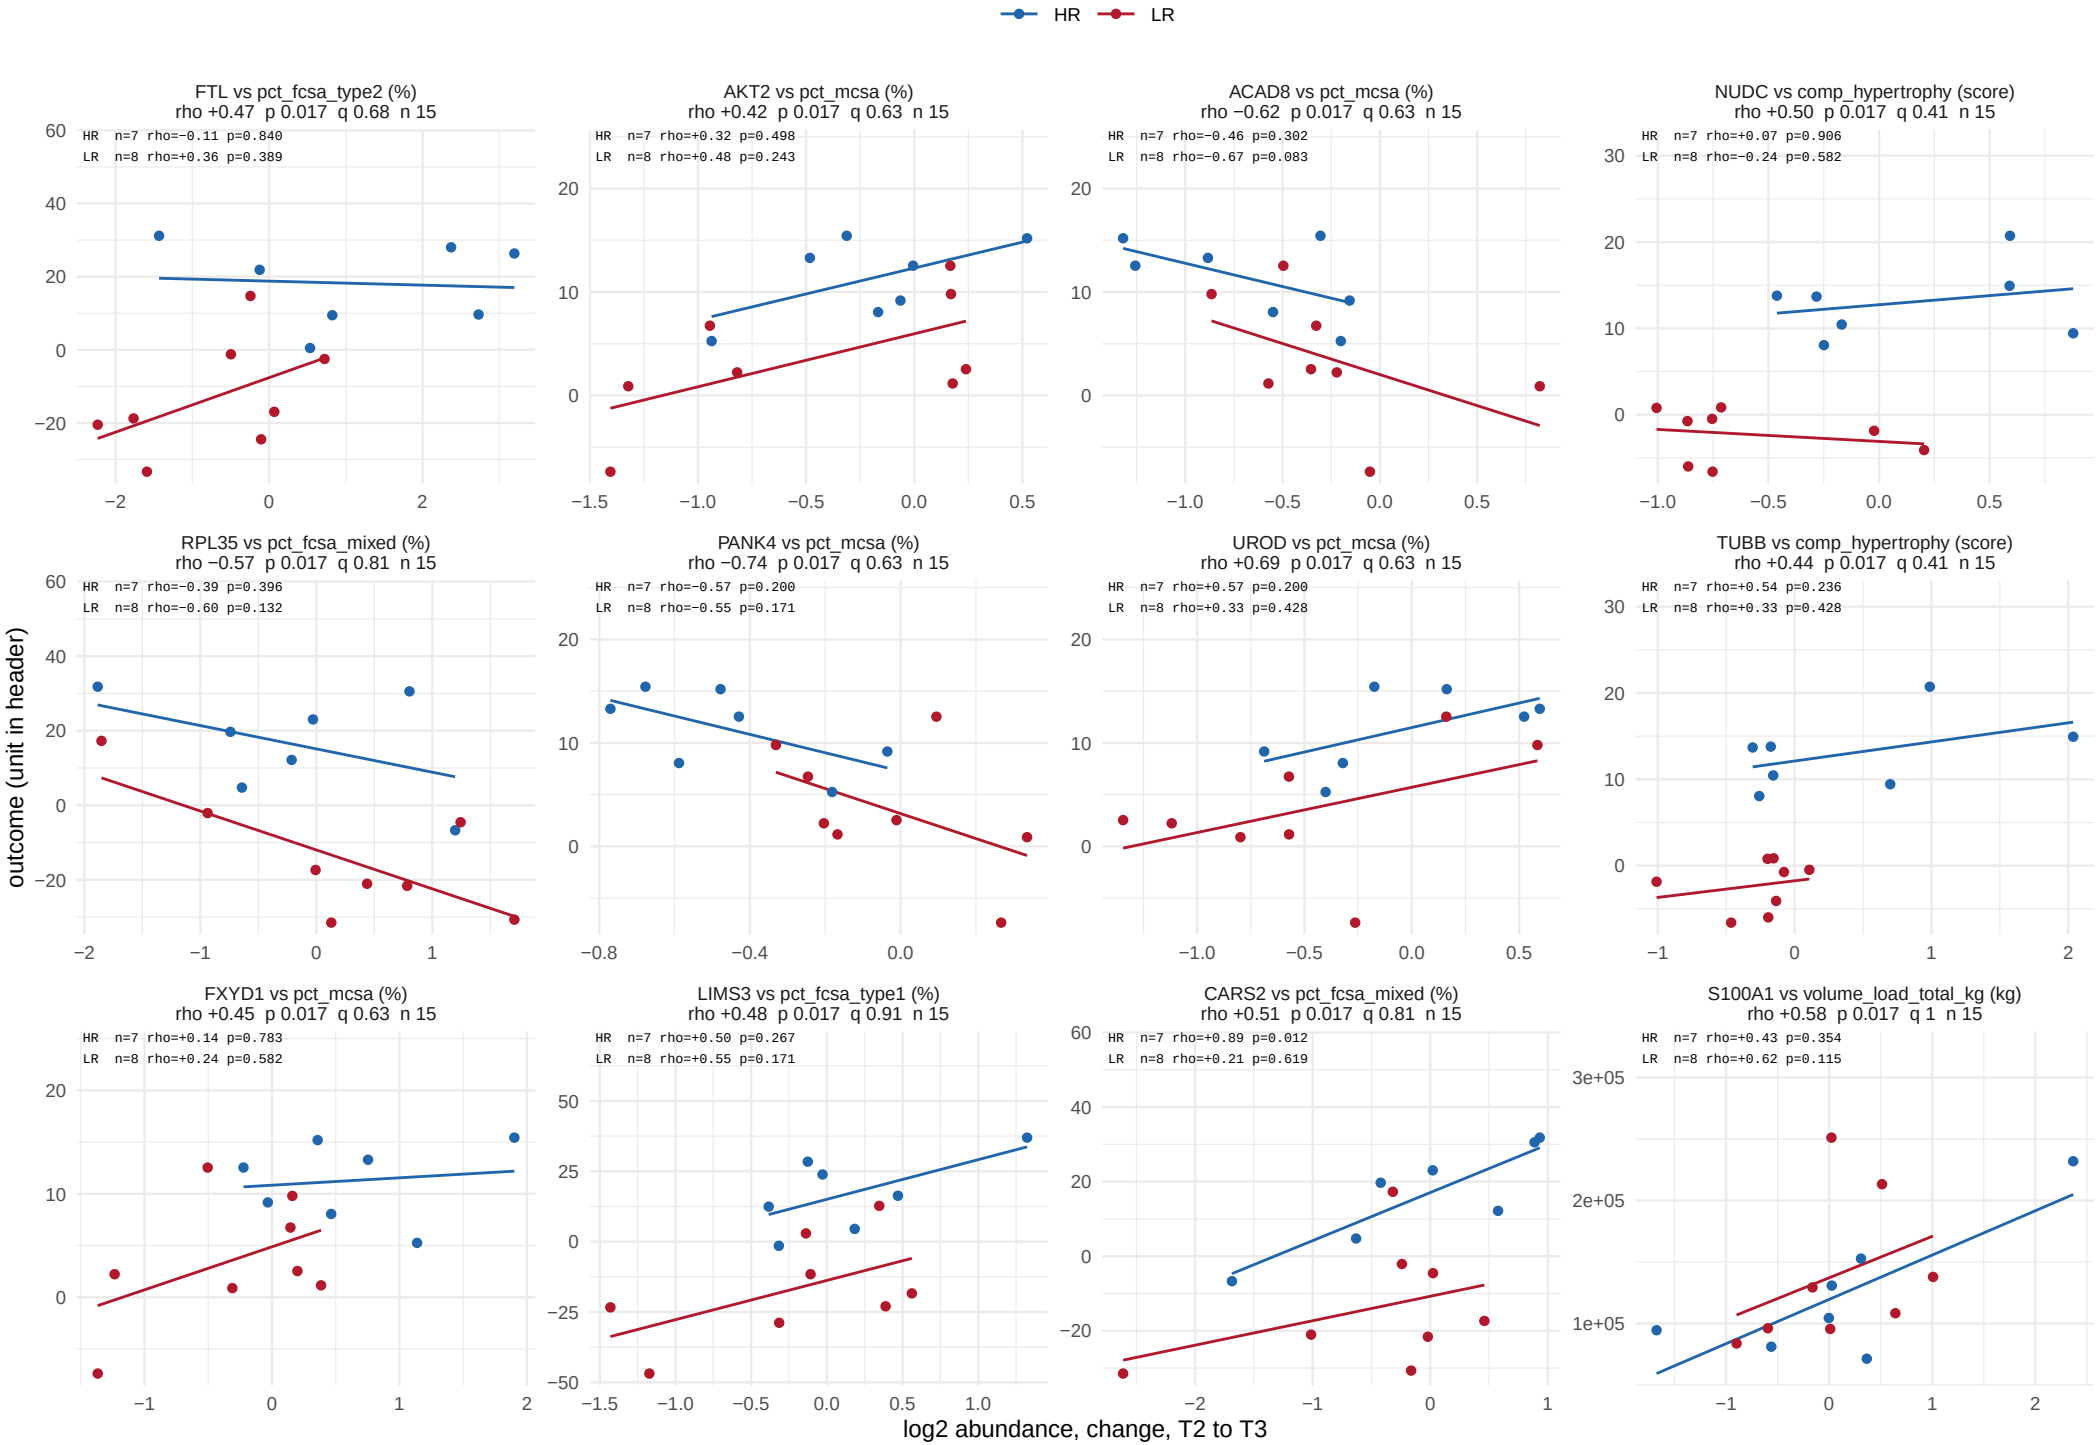

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


763 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 22 of 64.

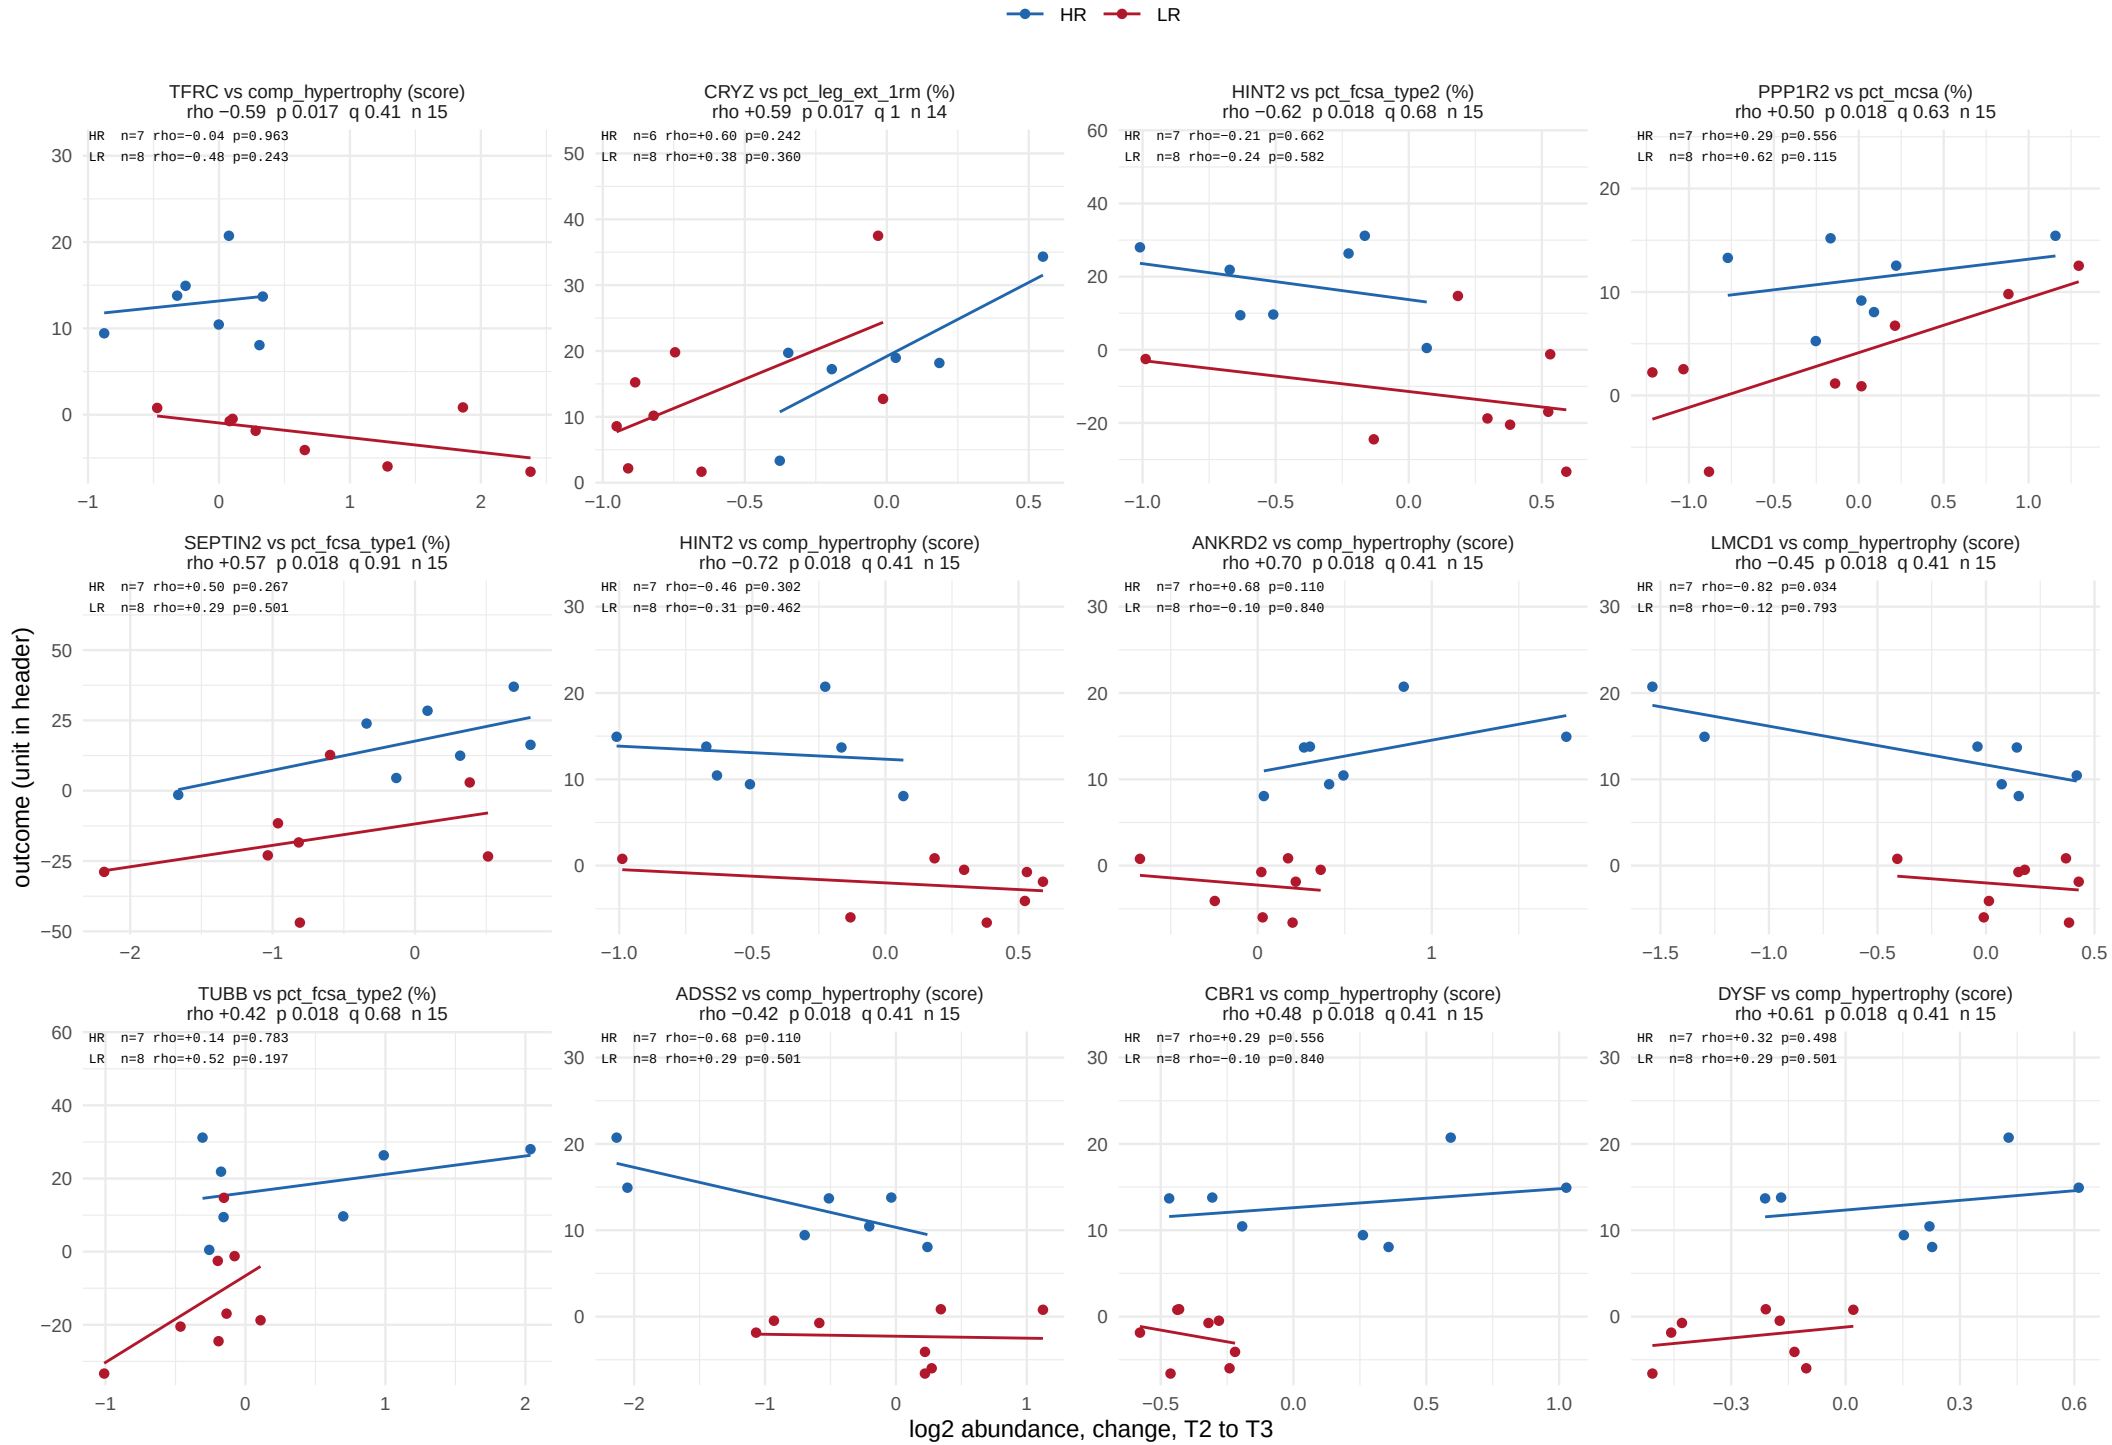

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


763 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 23 of 64.

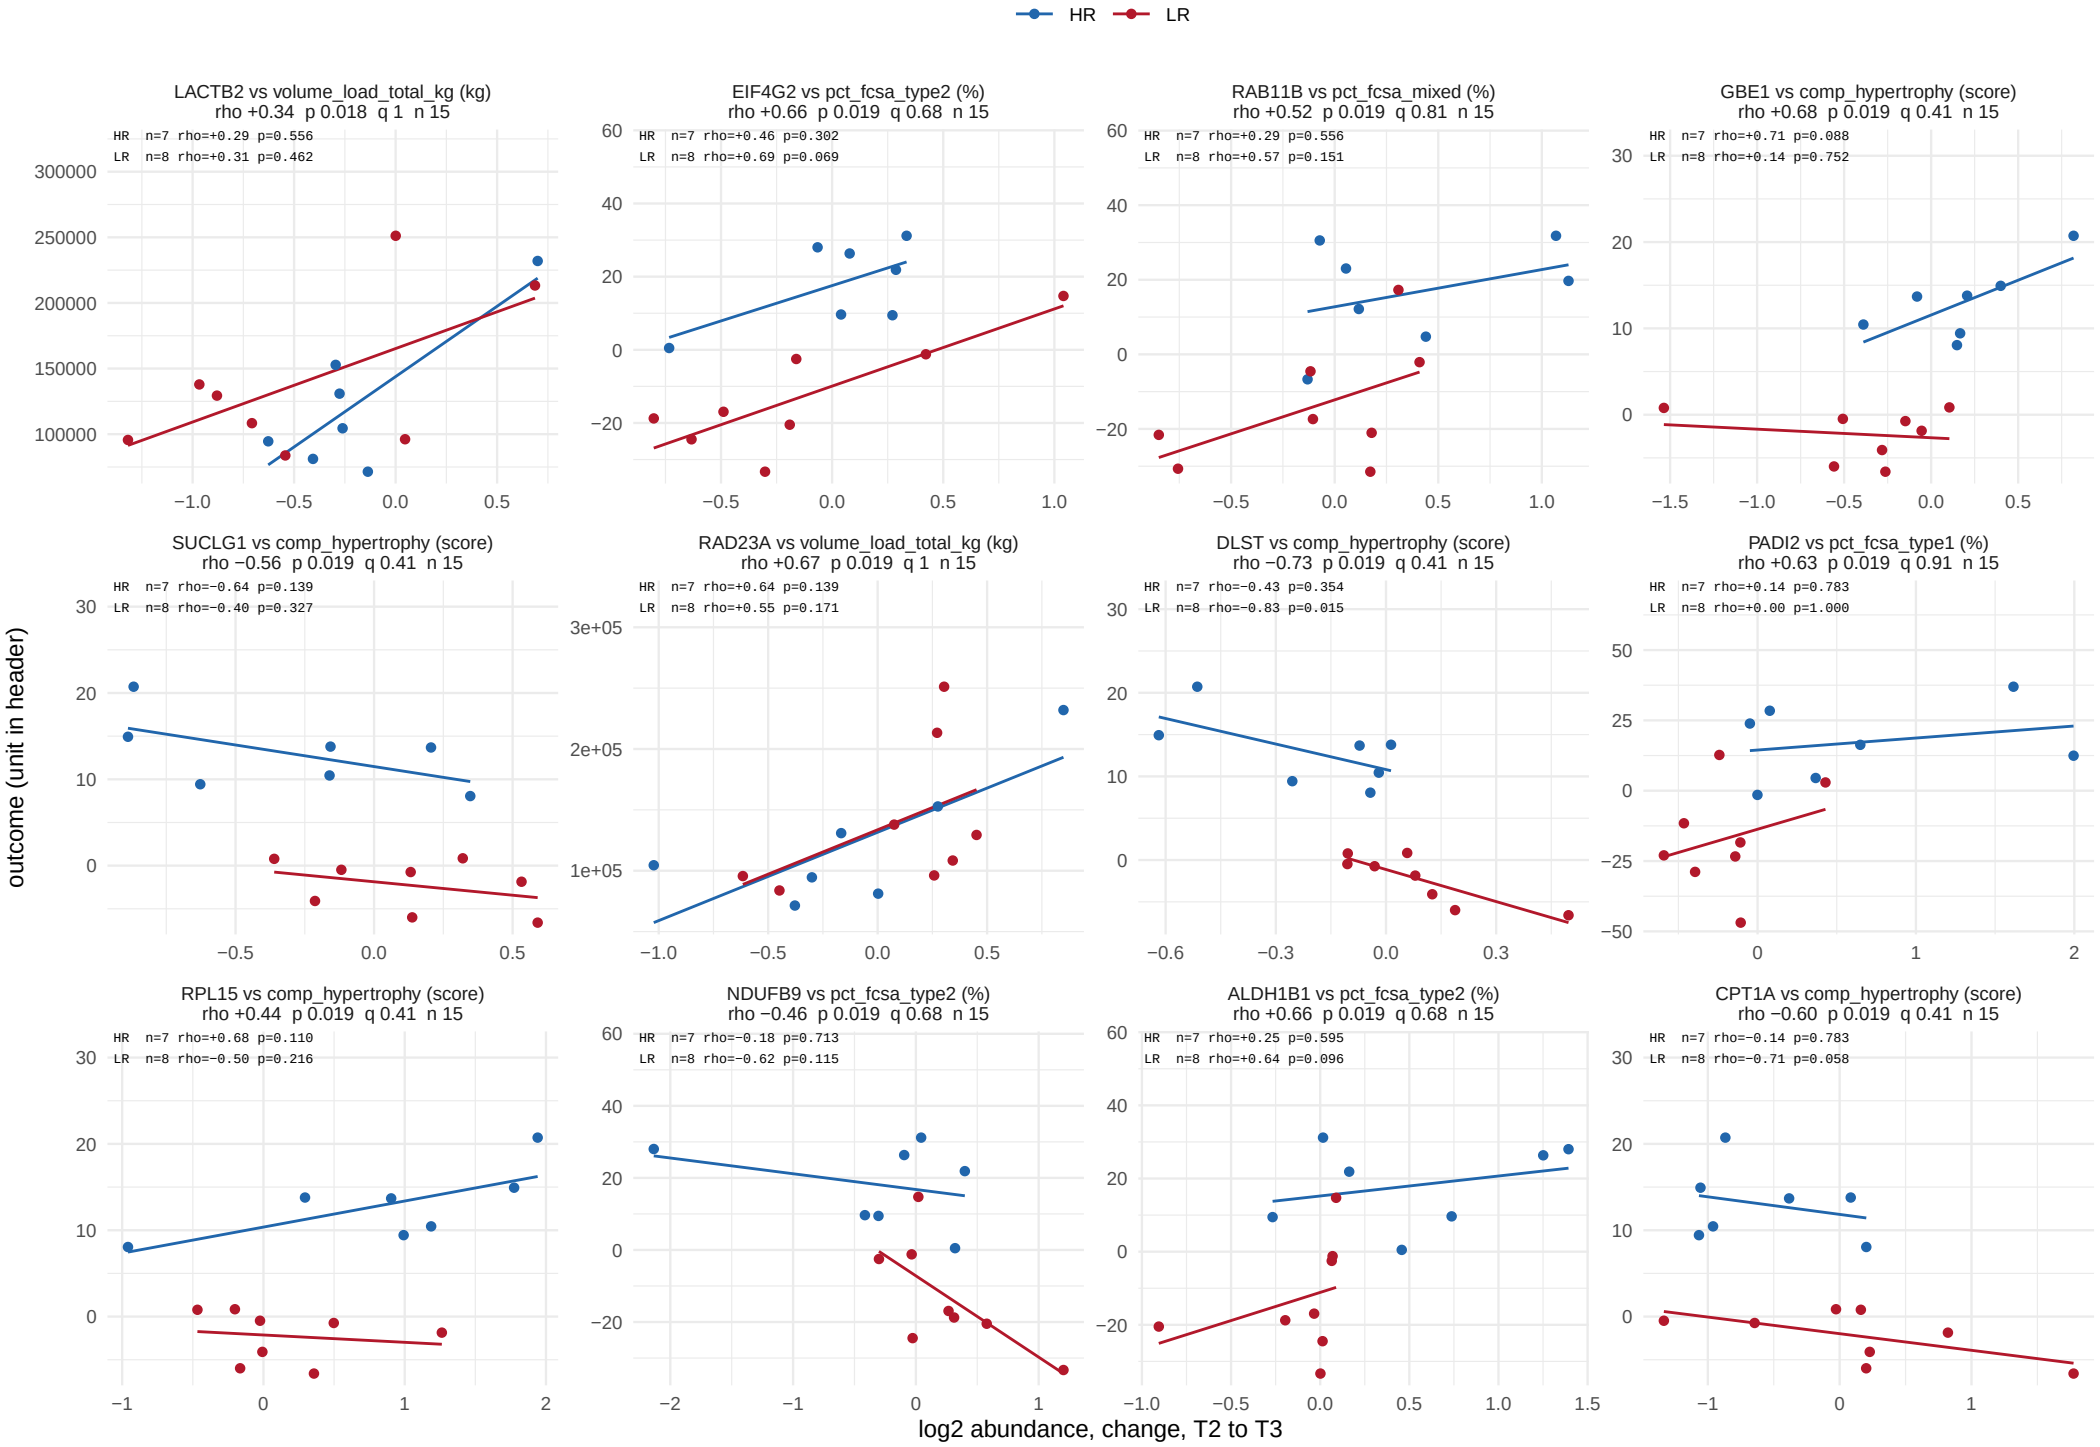

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window

763 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 24 of 64.

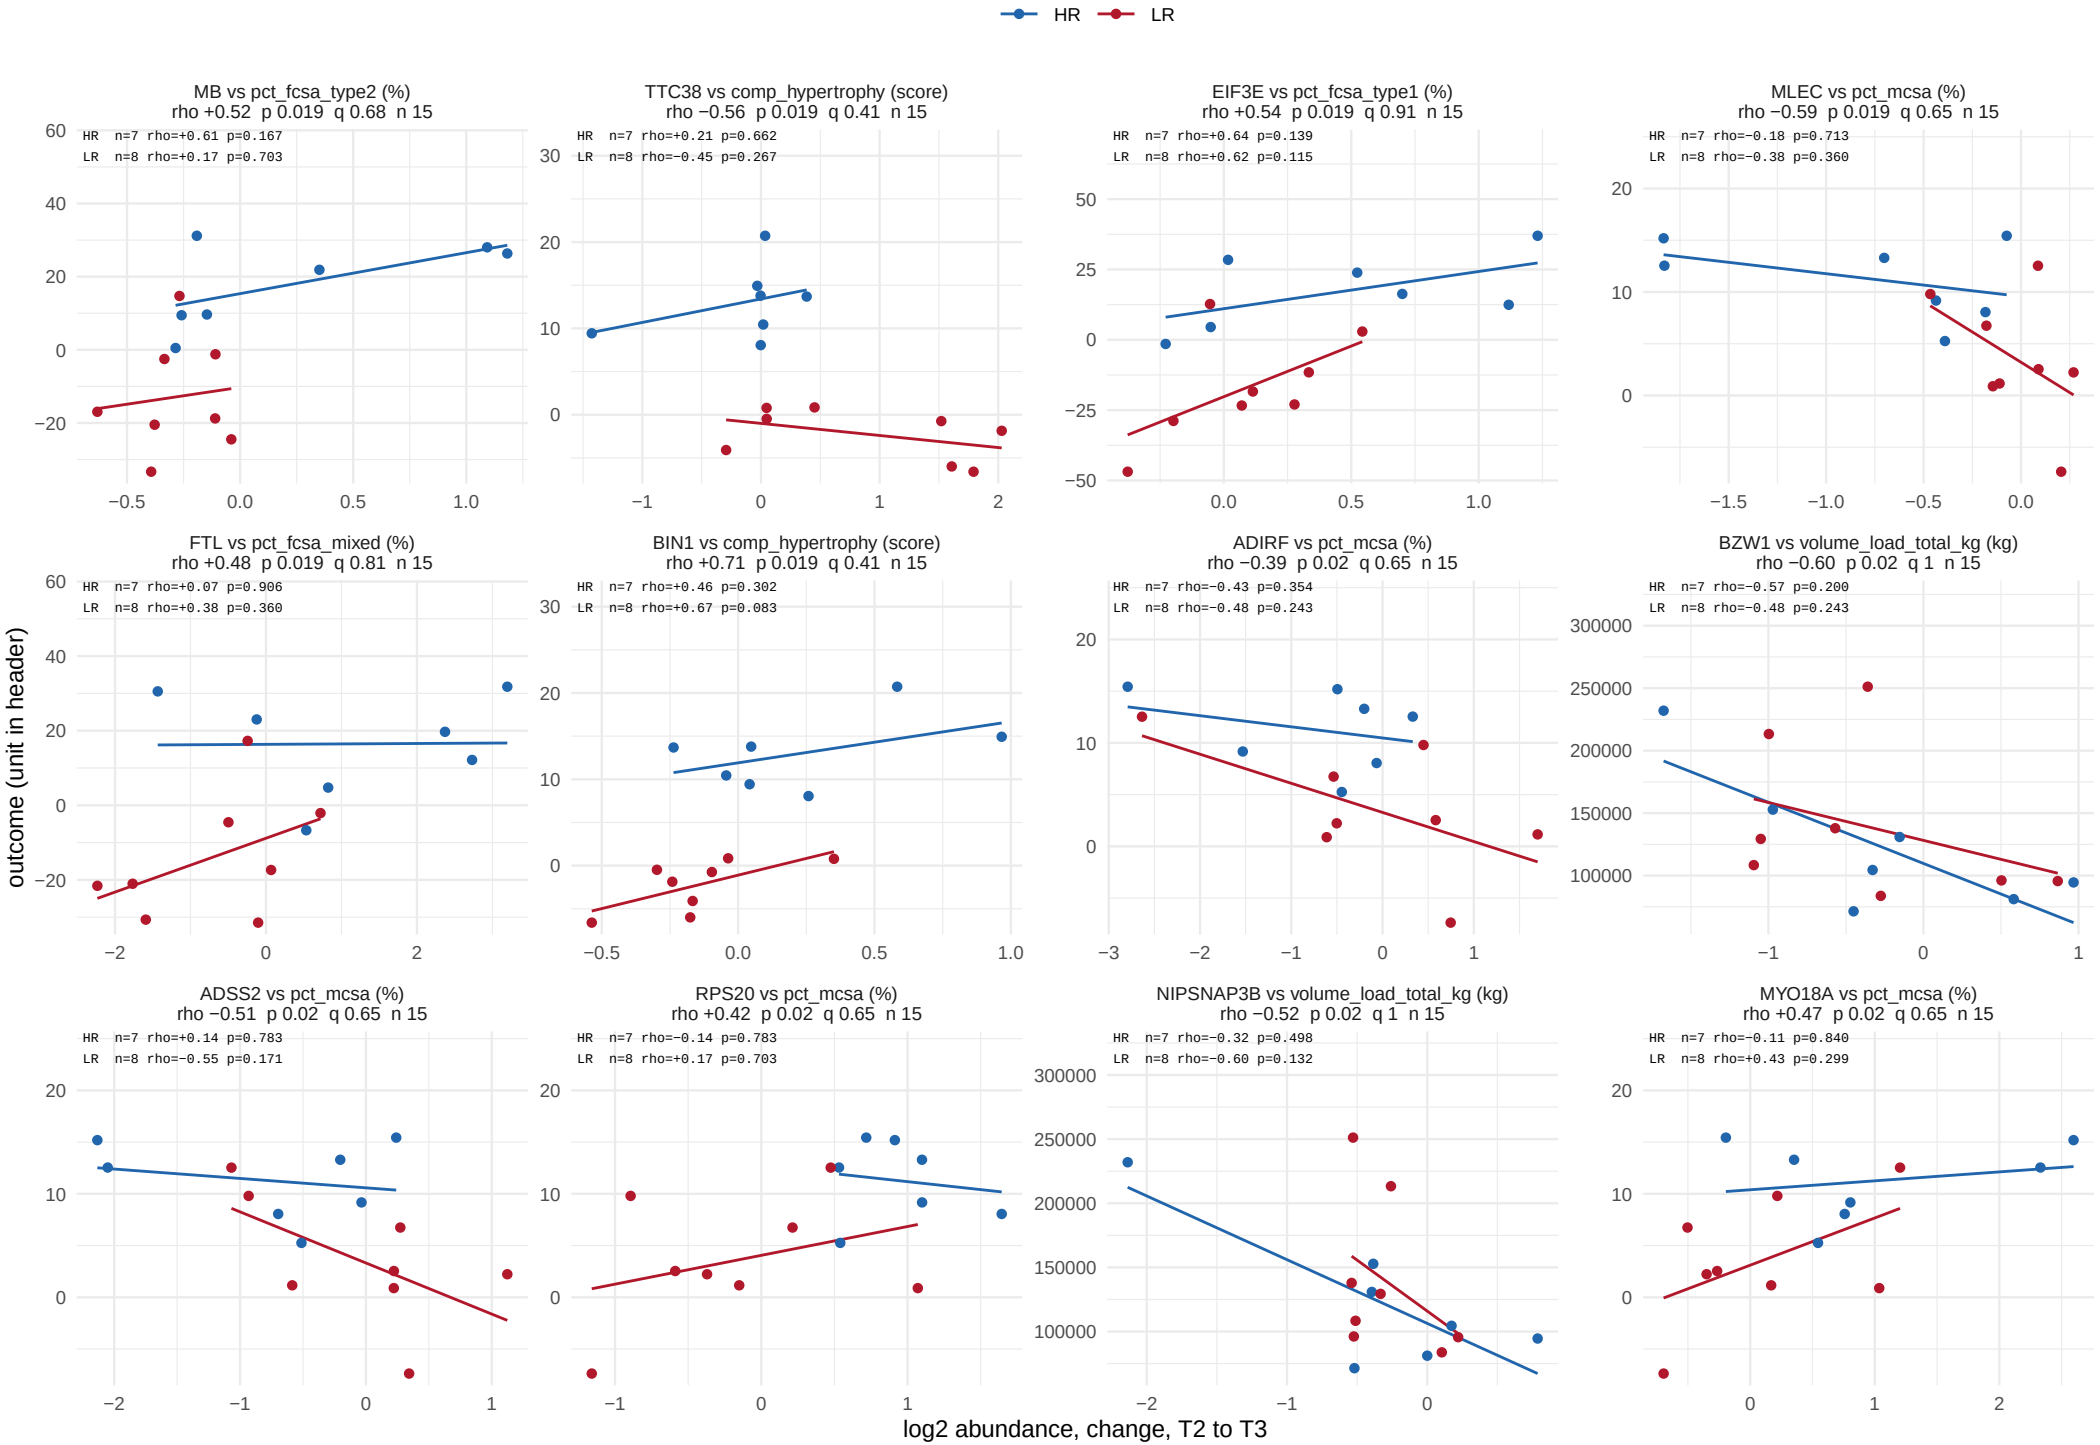

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window

763 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 25 of 64.



One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


763 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 26 of 64.



One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


763 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 27 of 64.

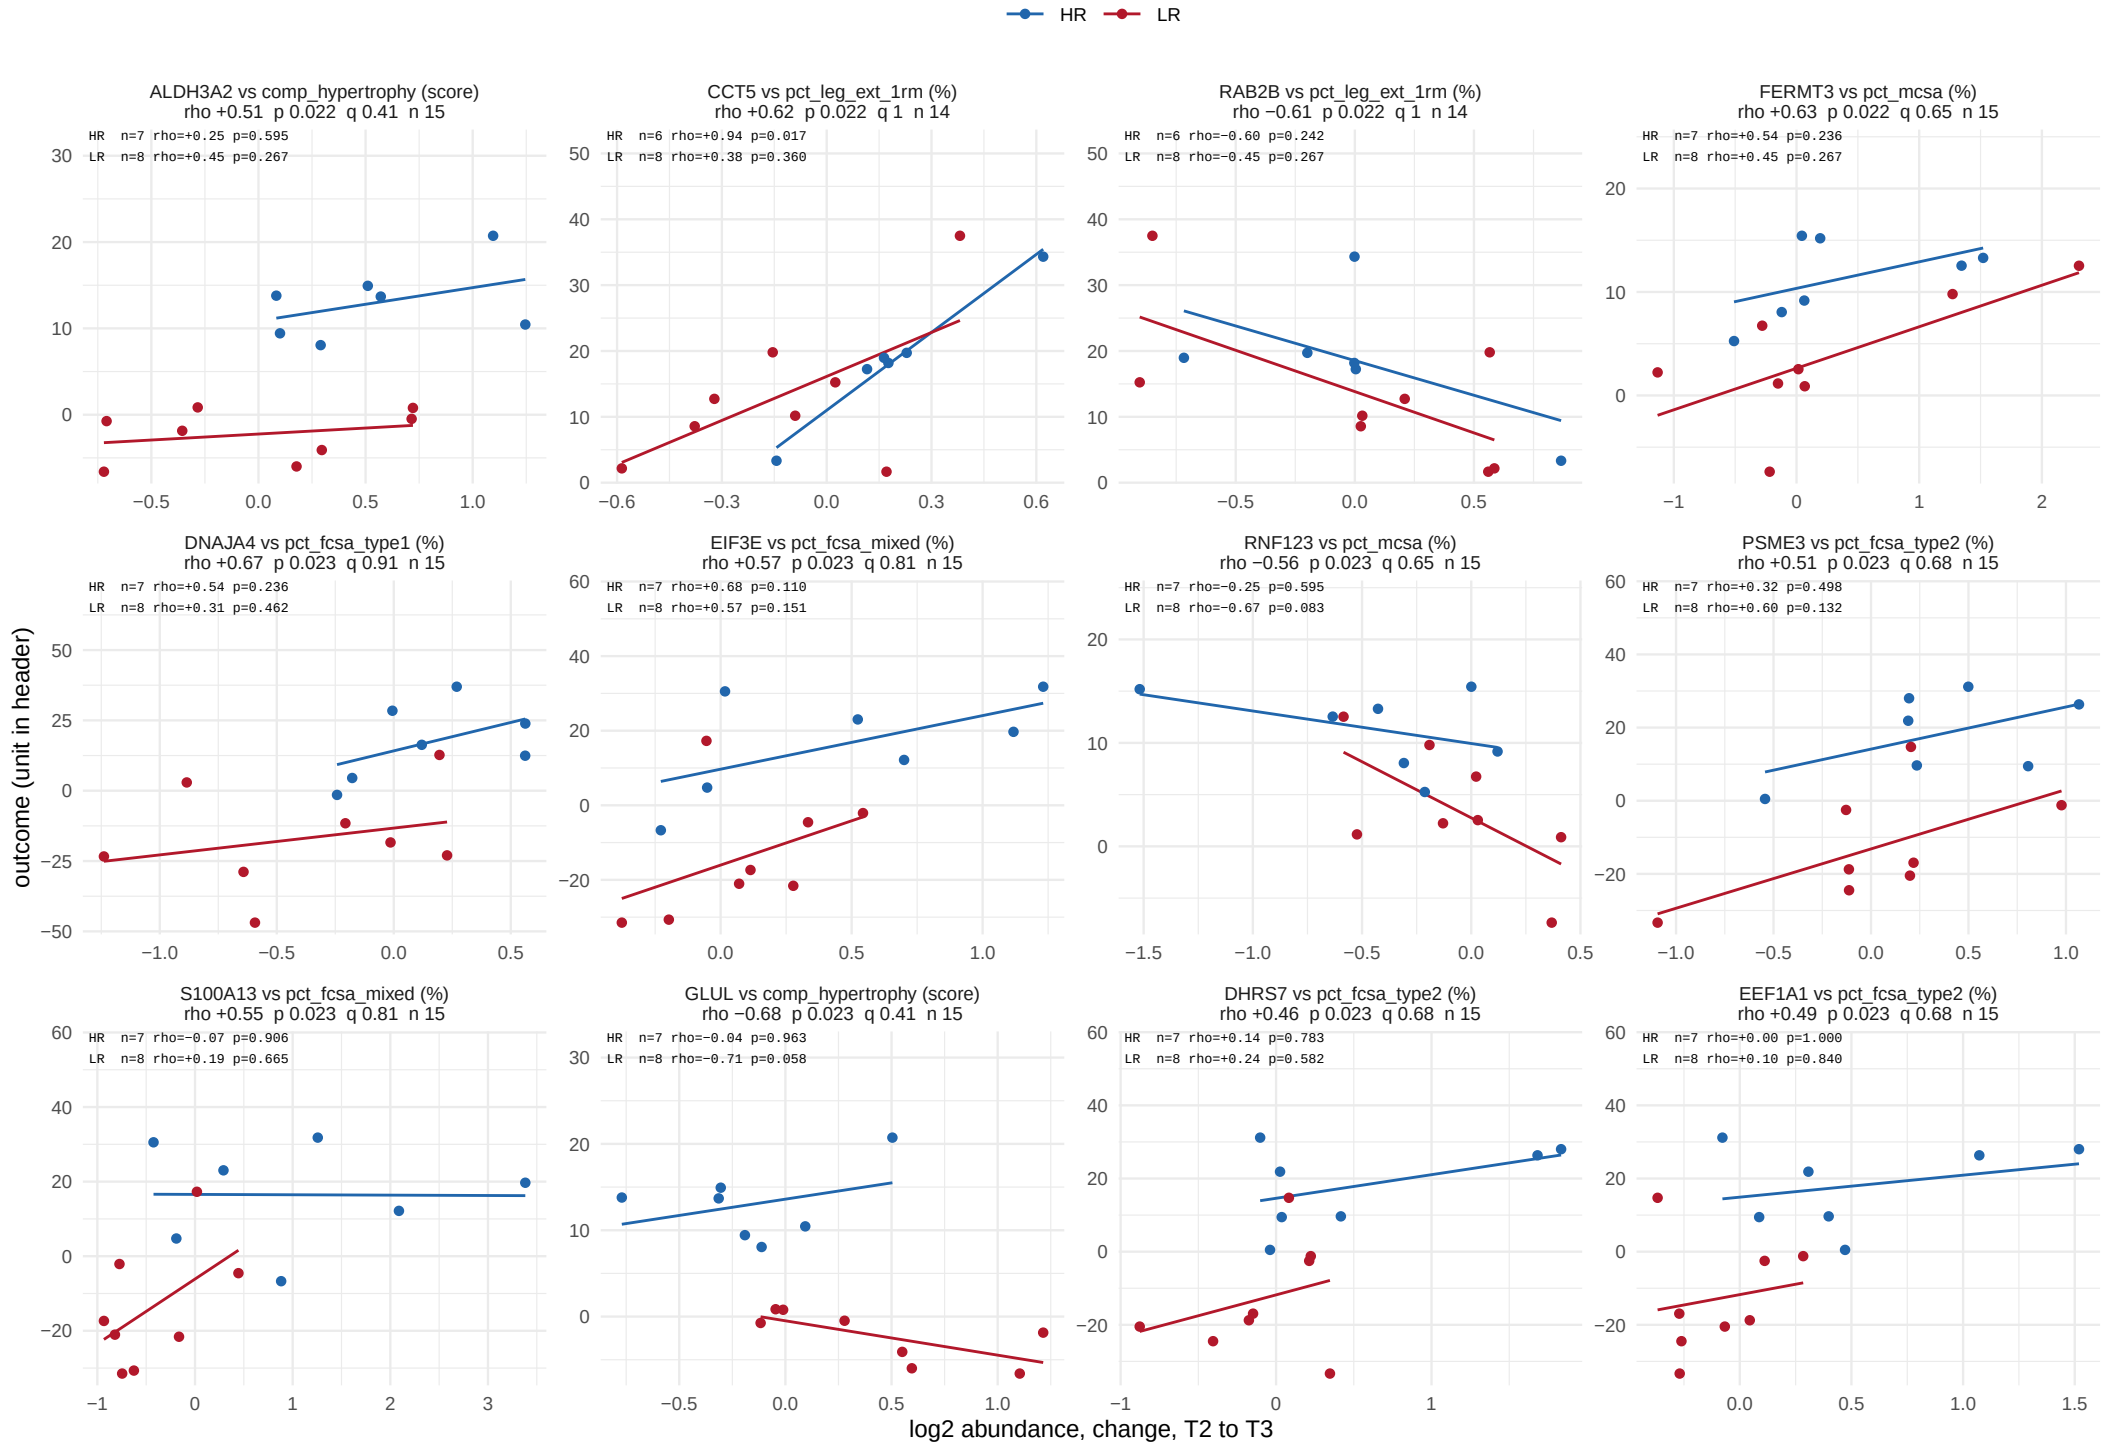

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


763 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 28 of 64.

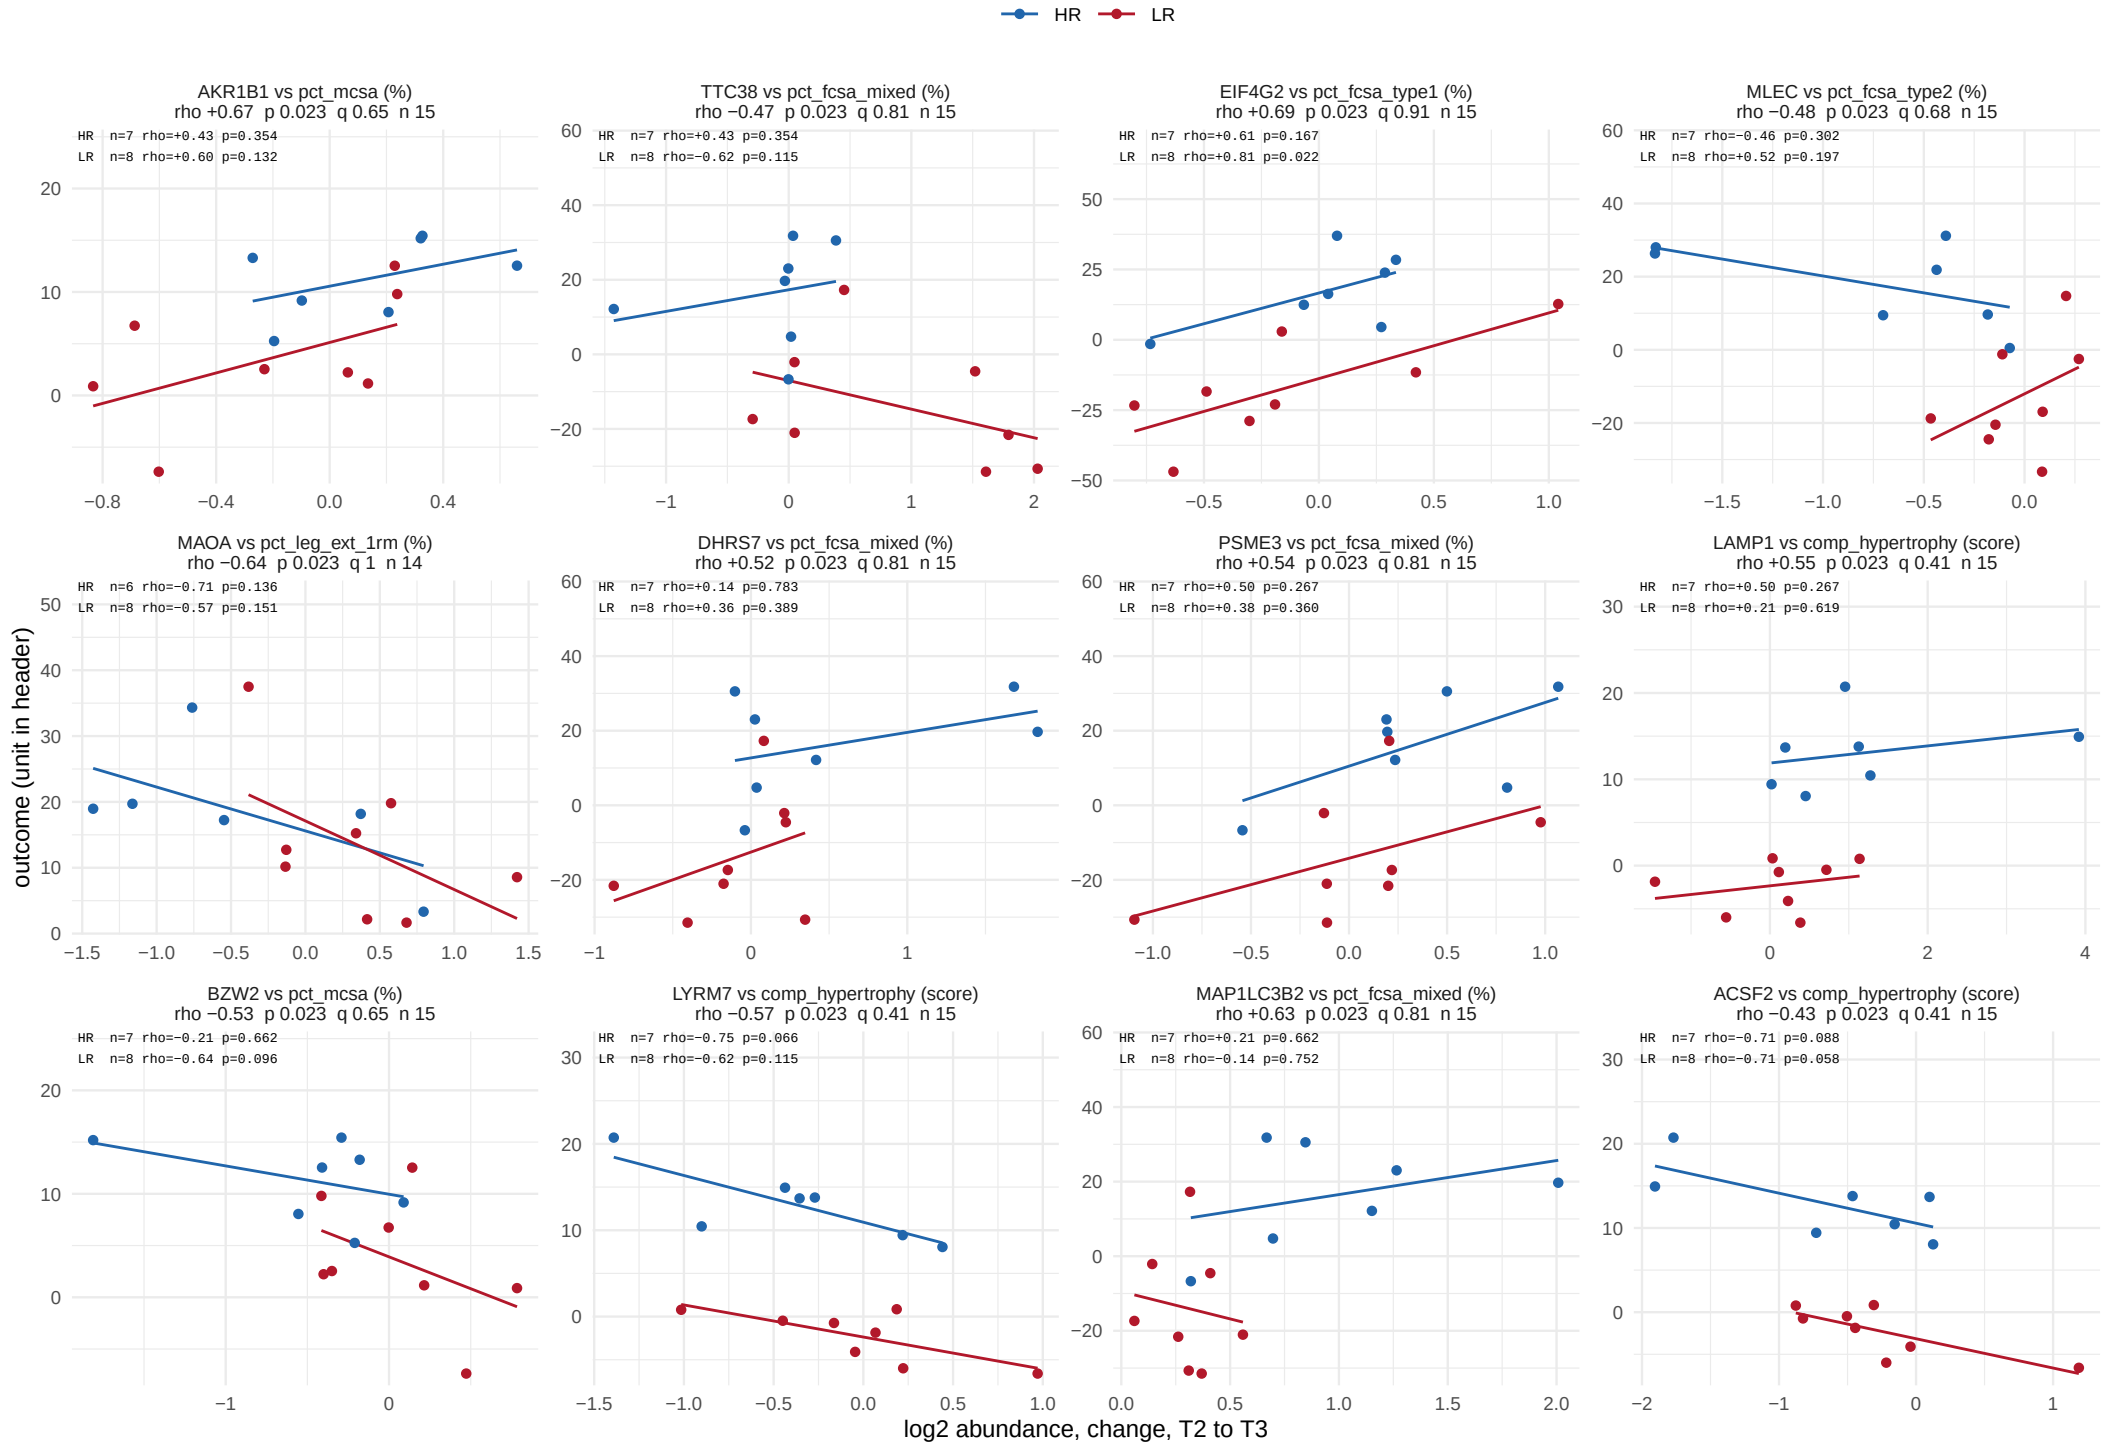

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


763 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 29 of 64.

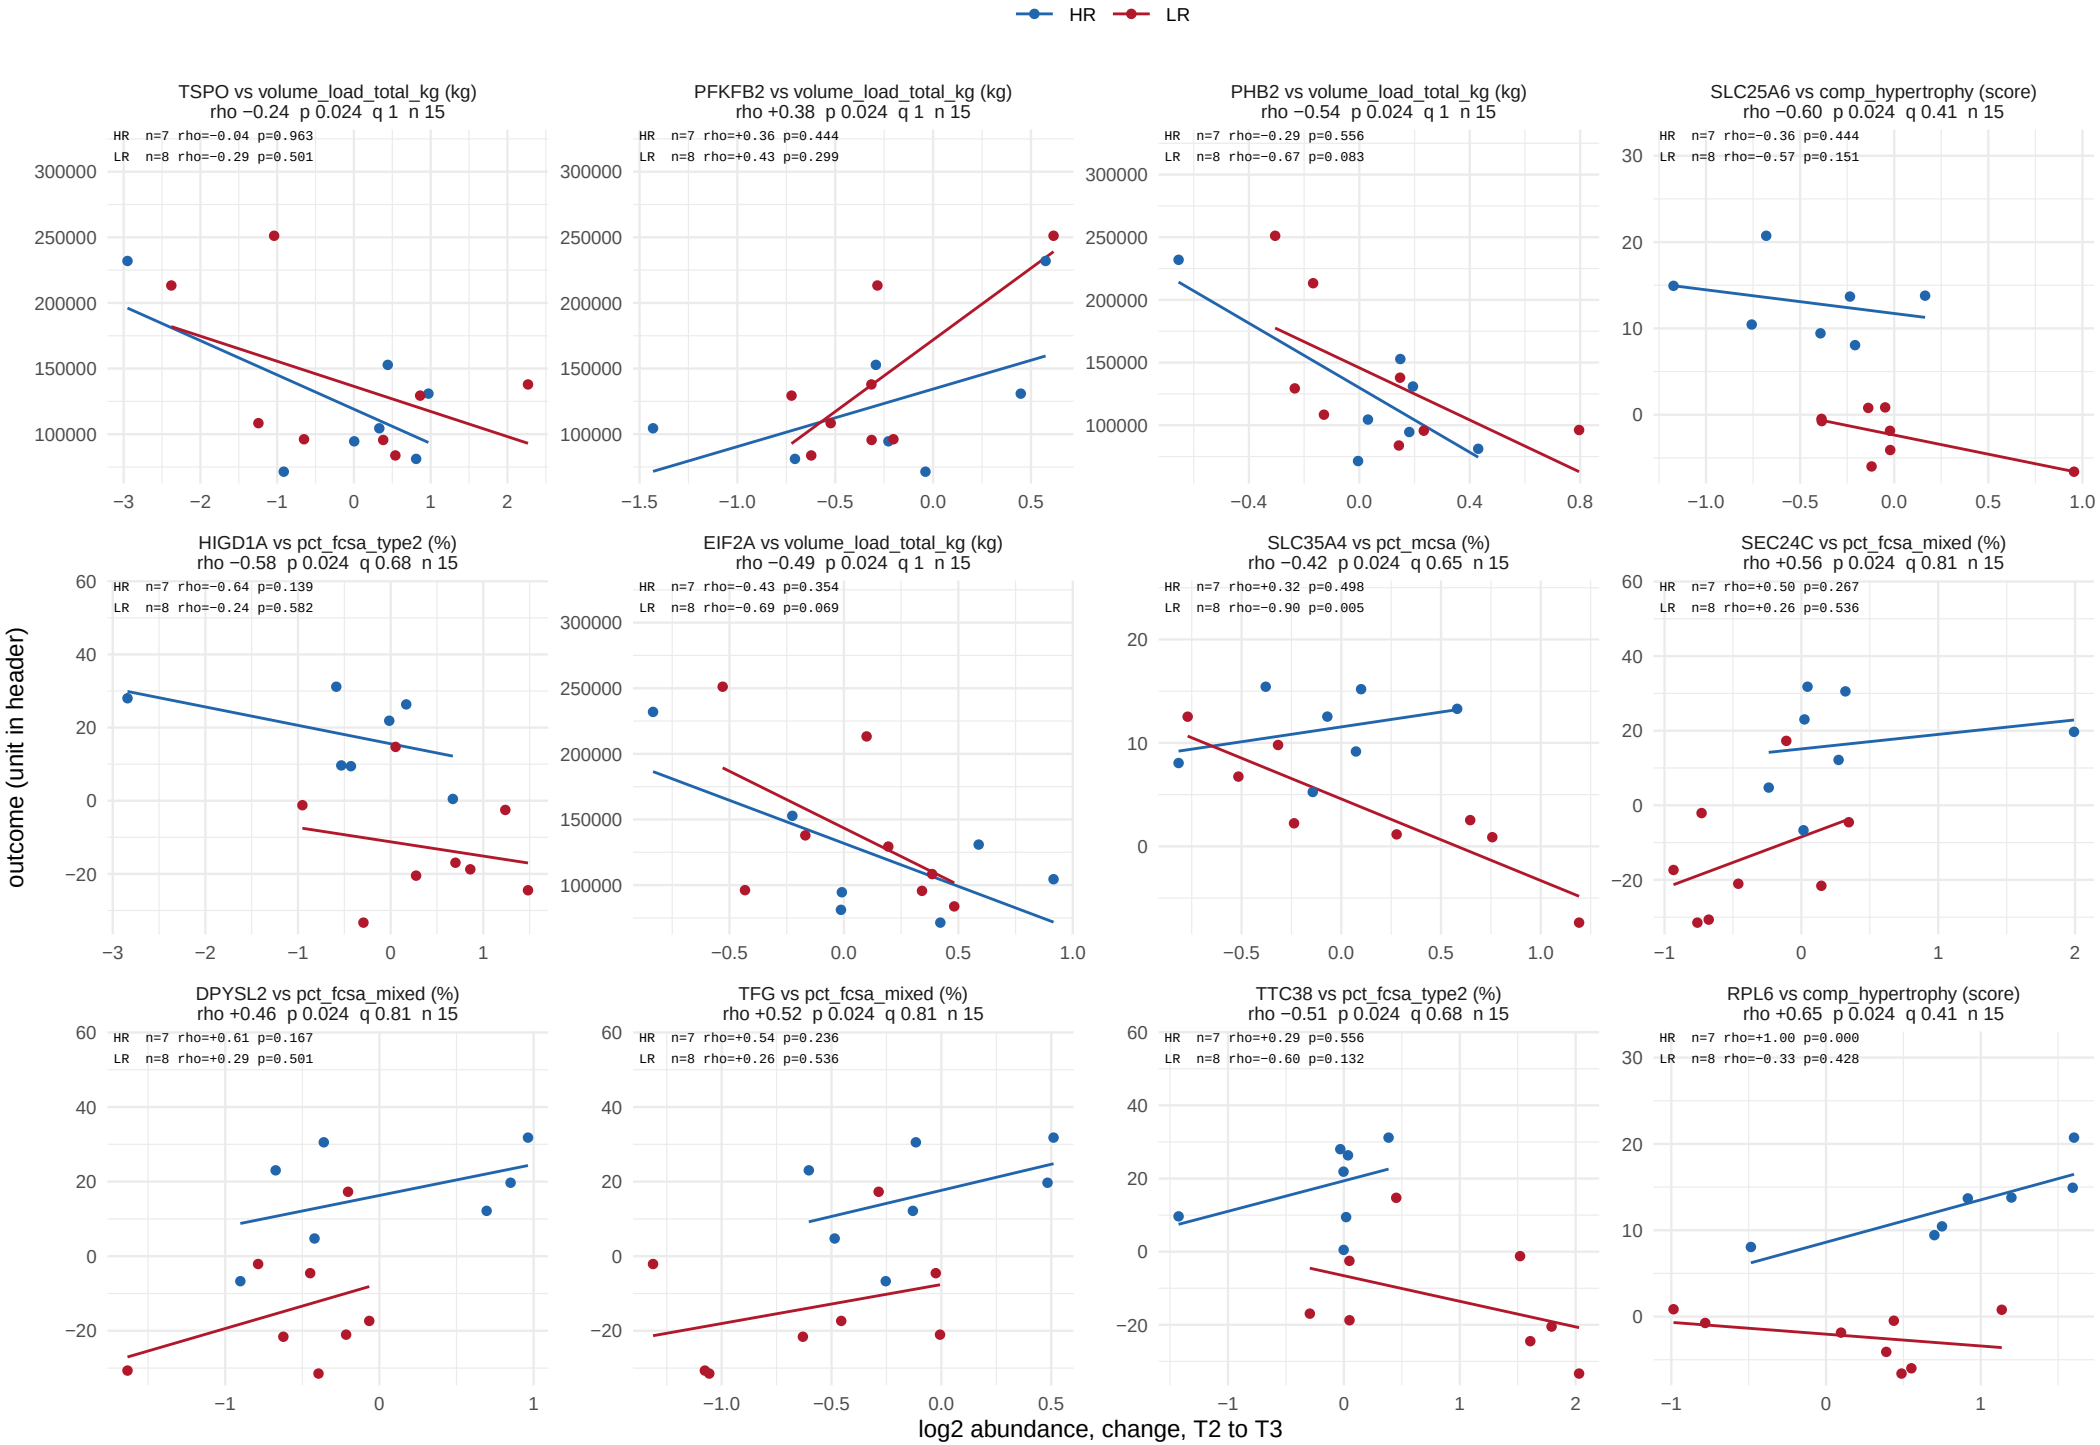

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


763 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 30 of 64.

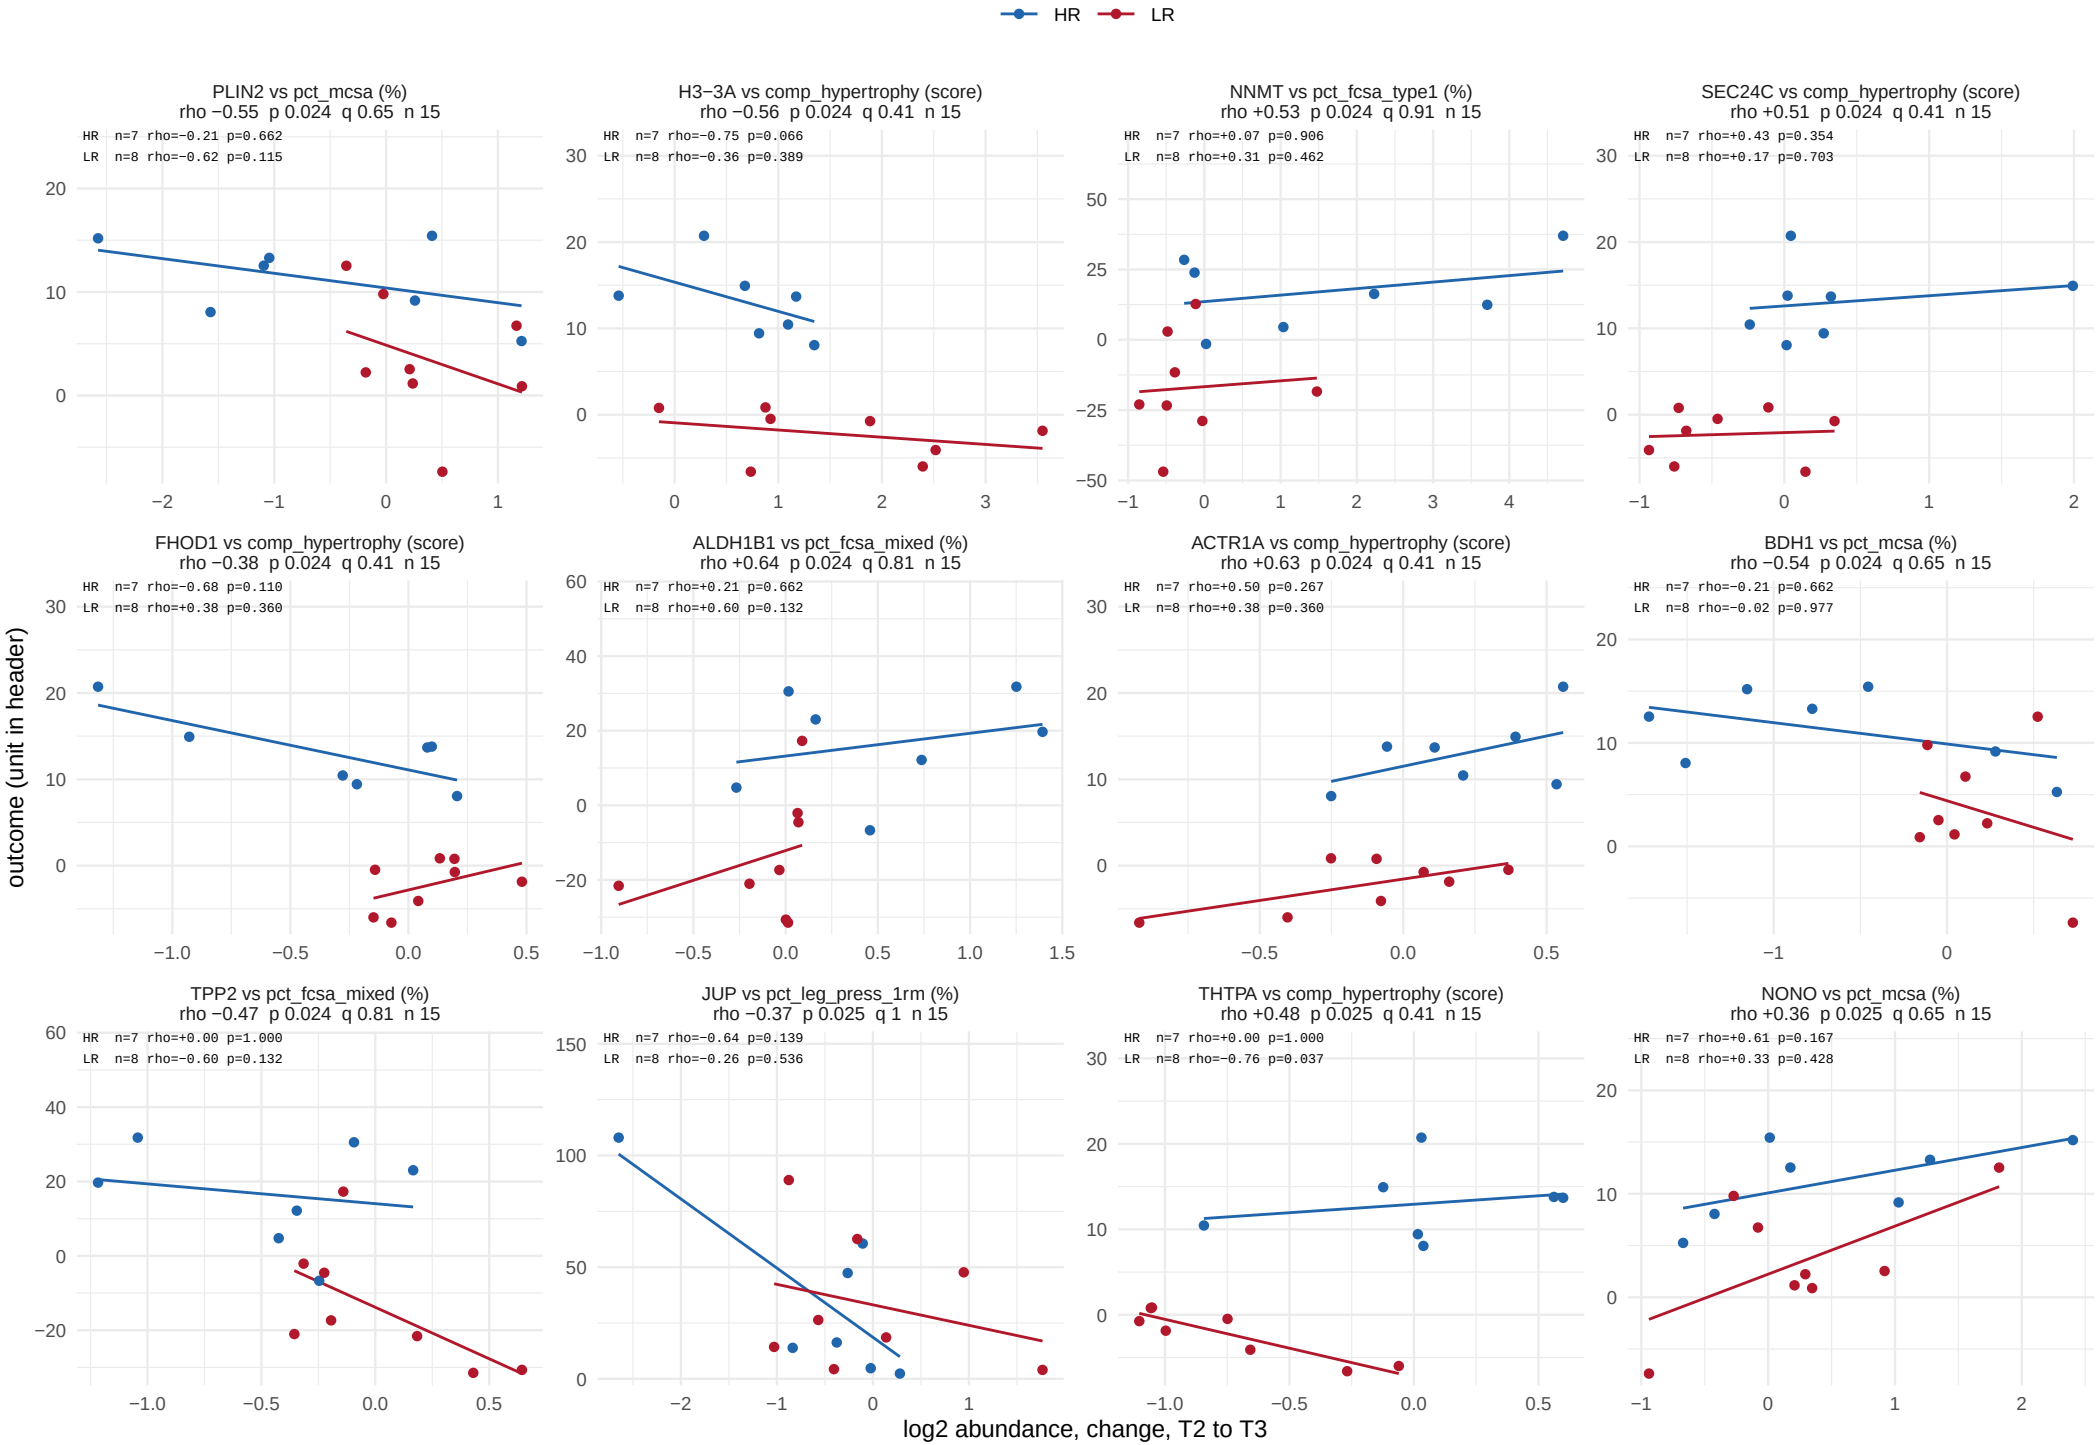

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


763 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 31 of 64.

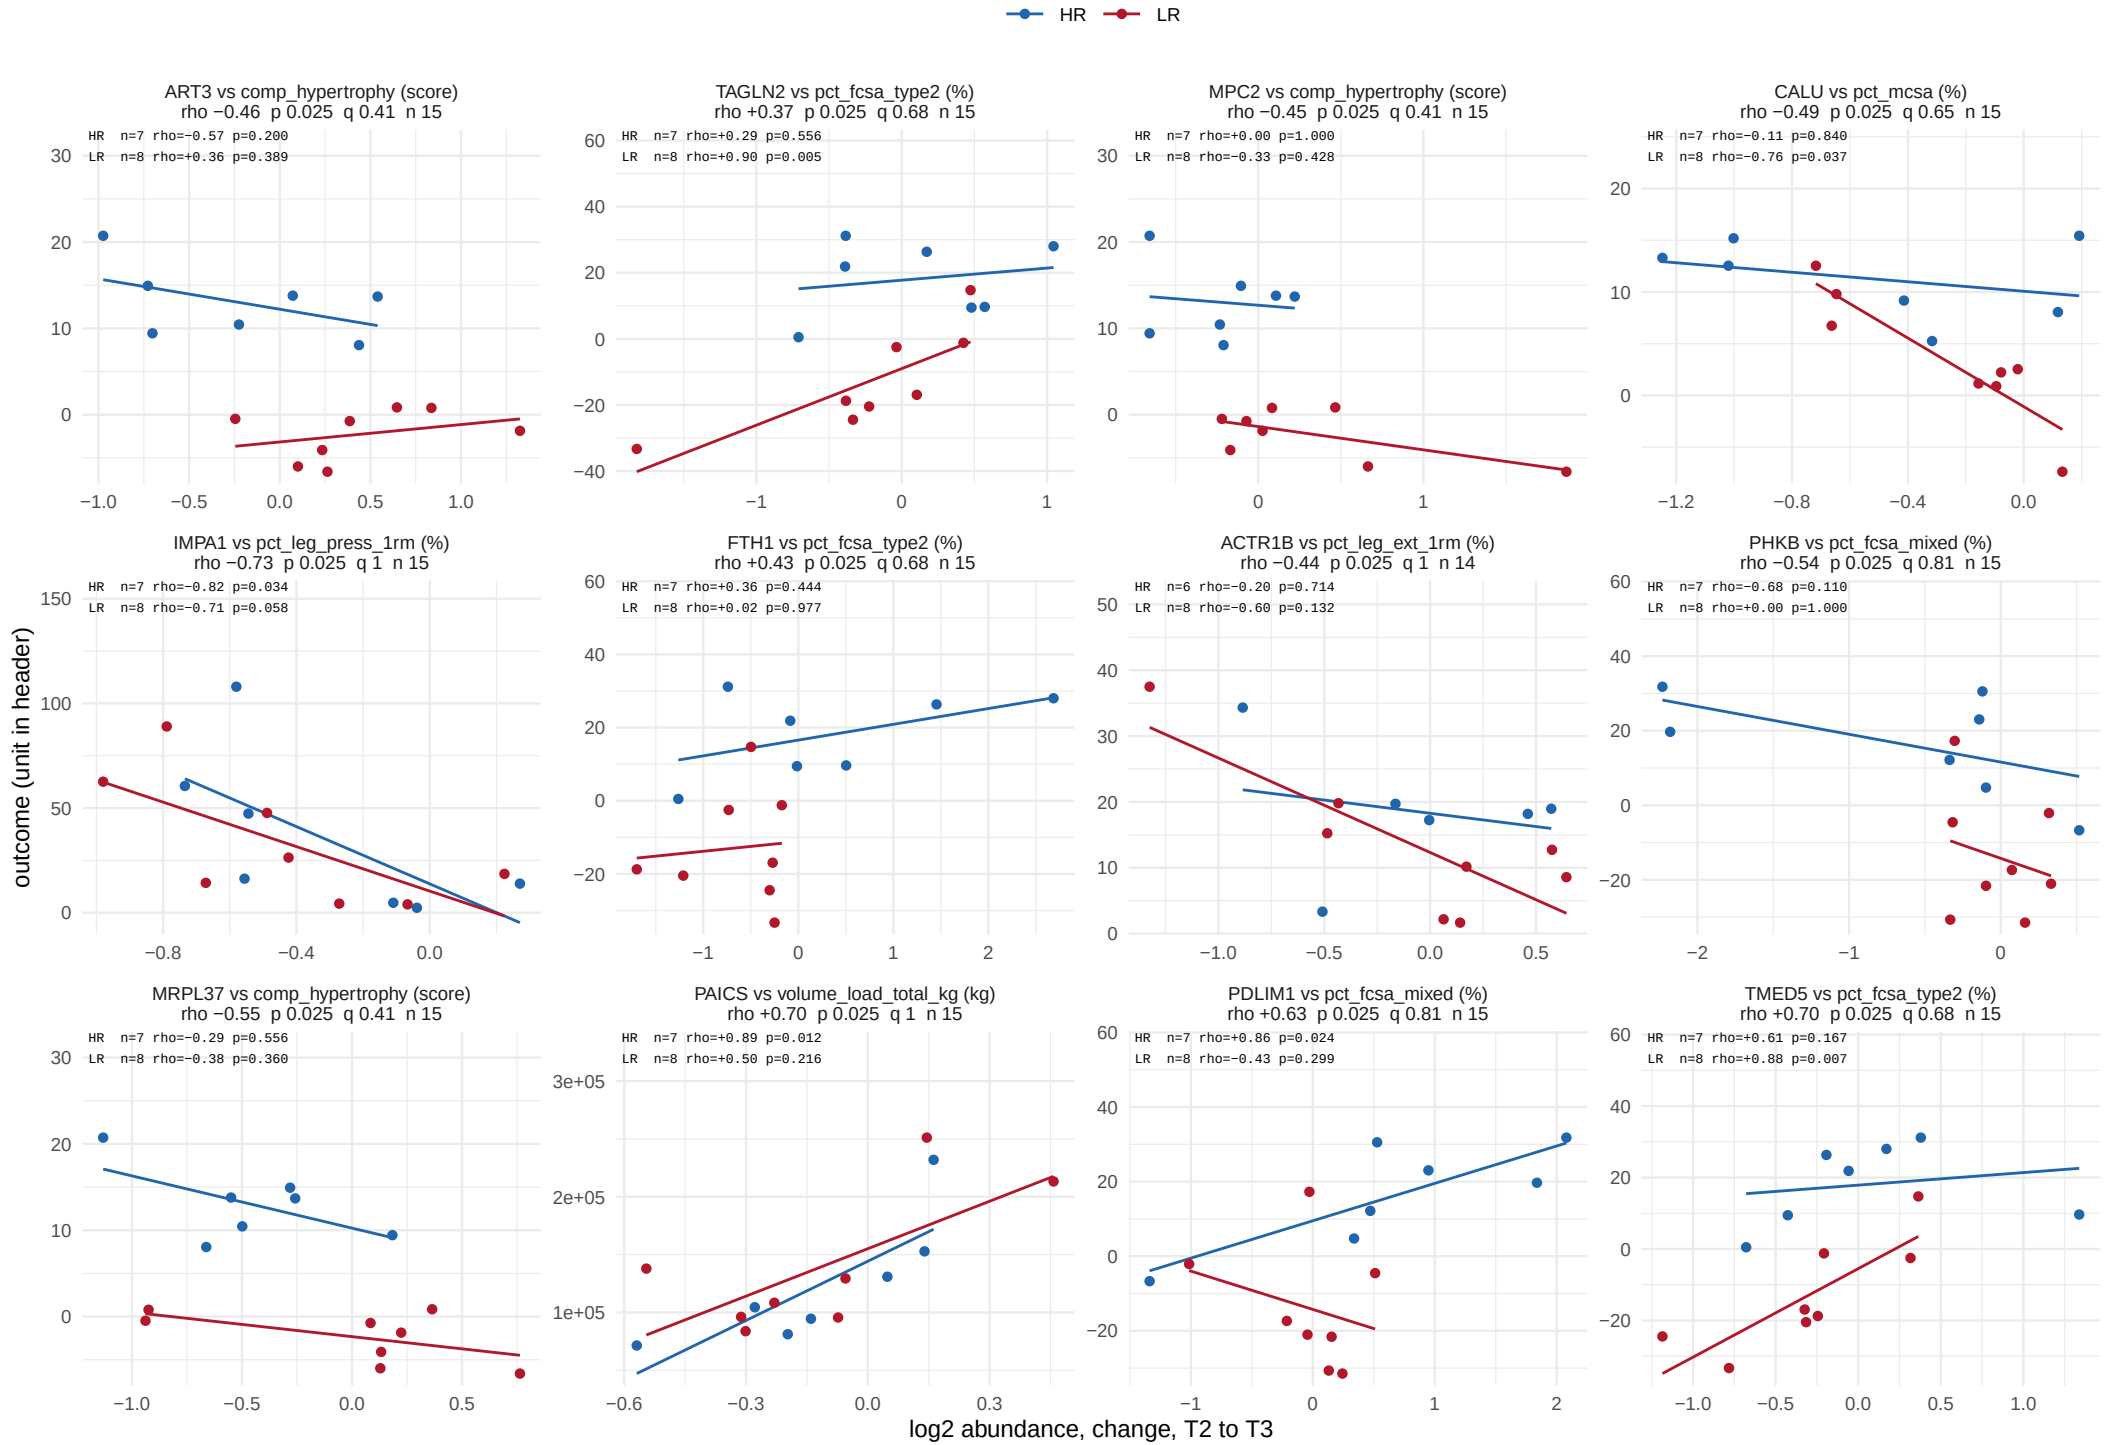

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


763 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 32 of 64.

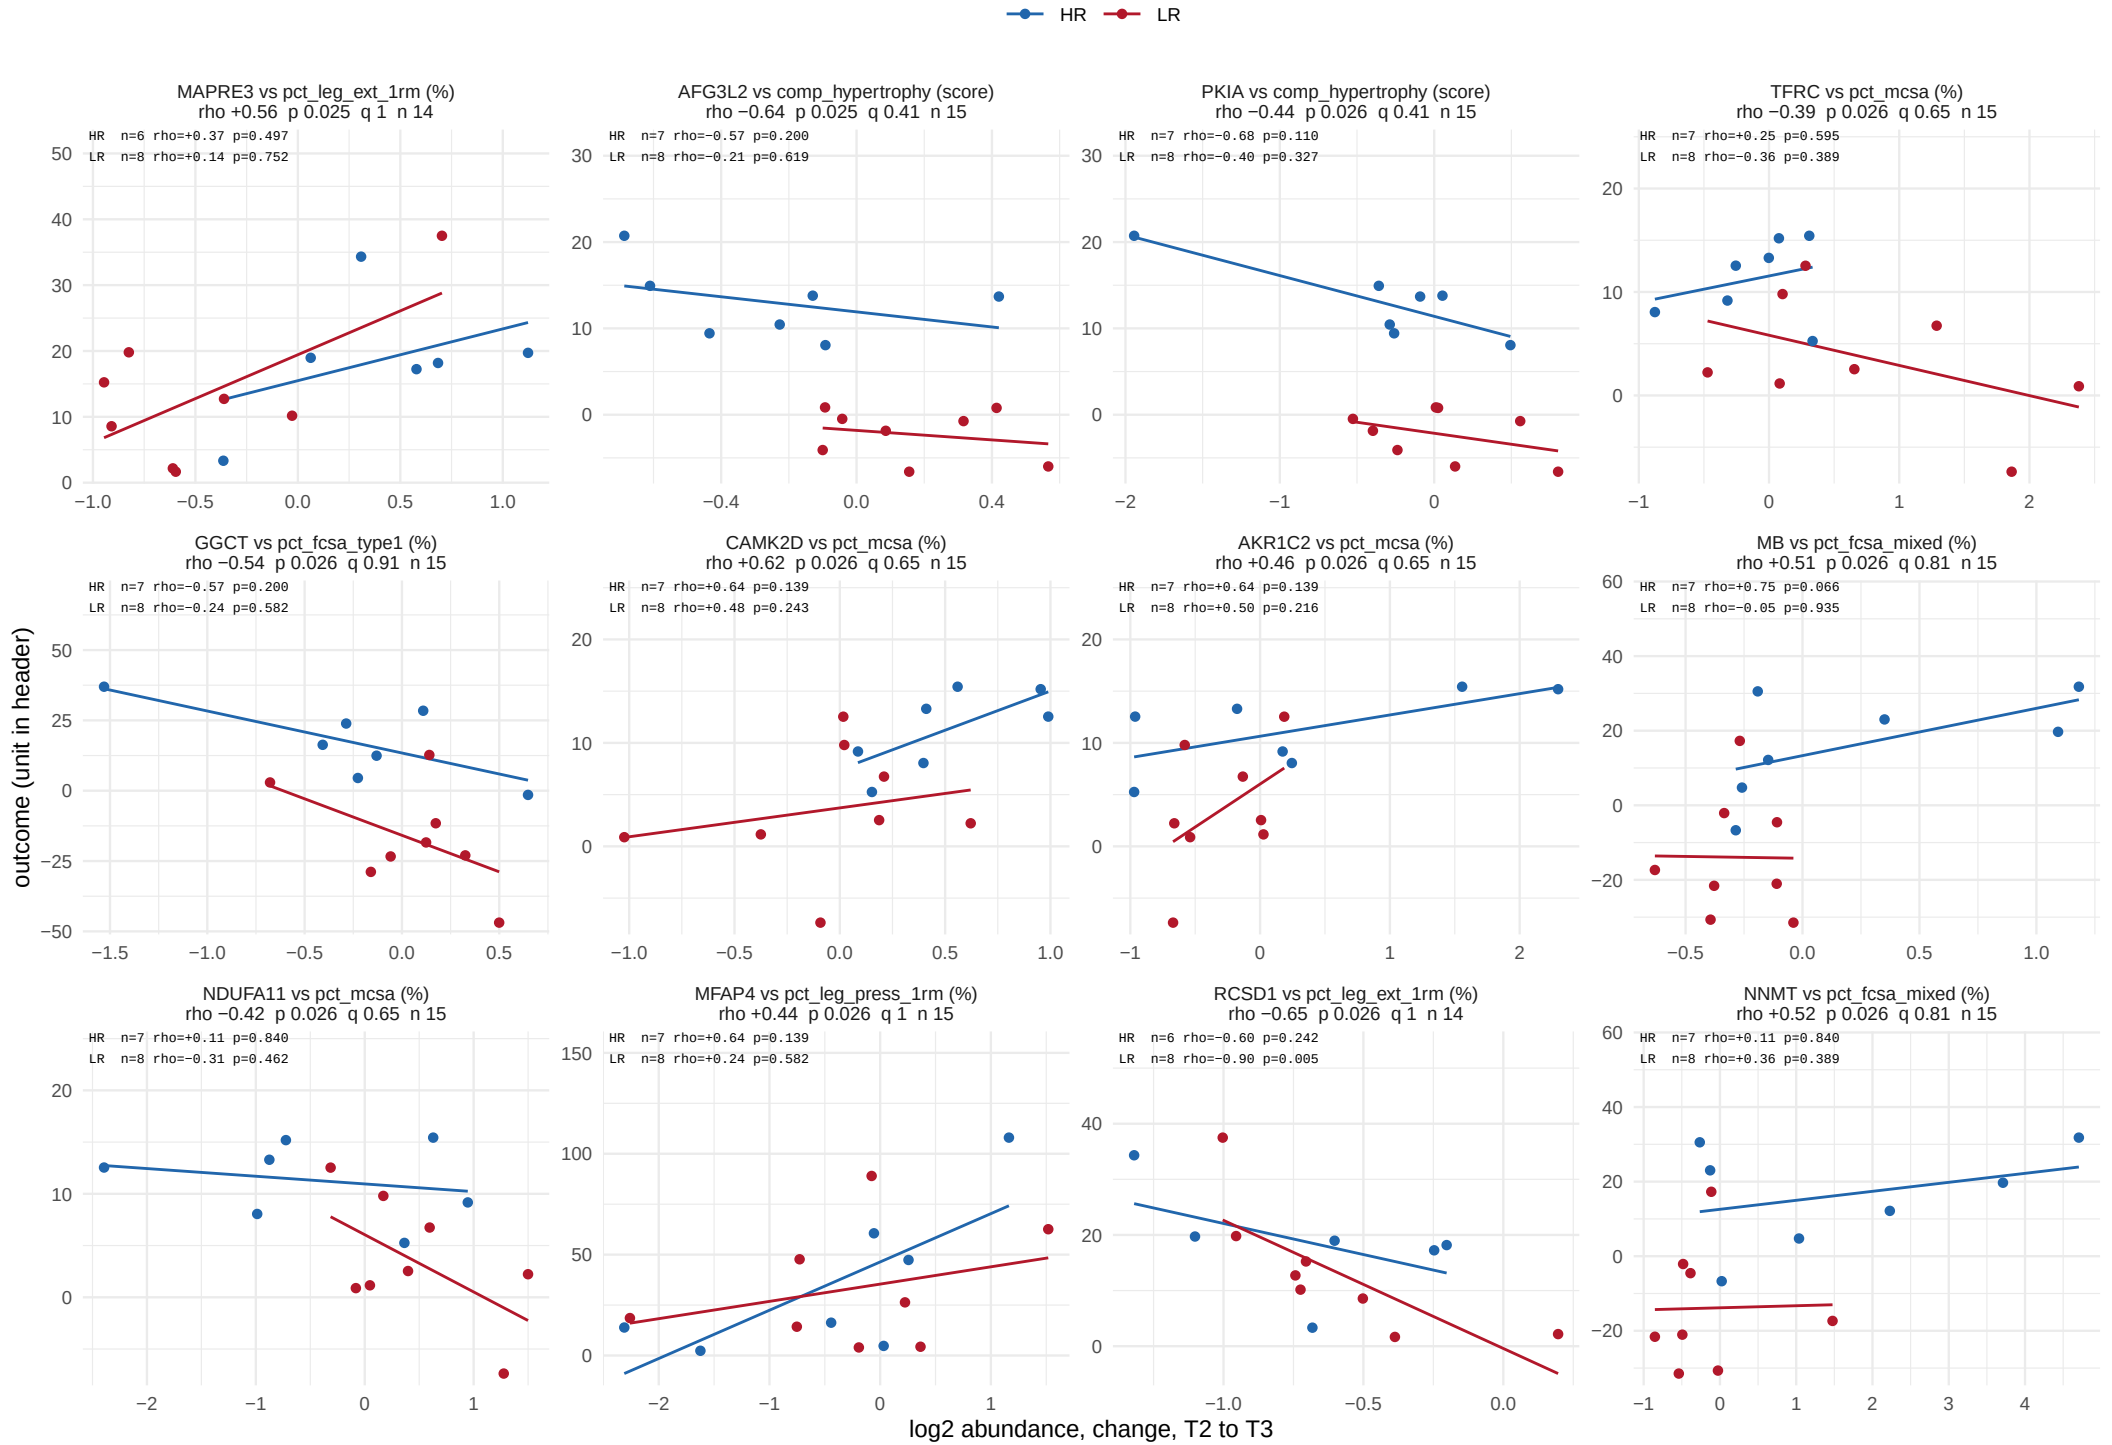

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


763 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 33 of 64.

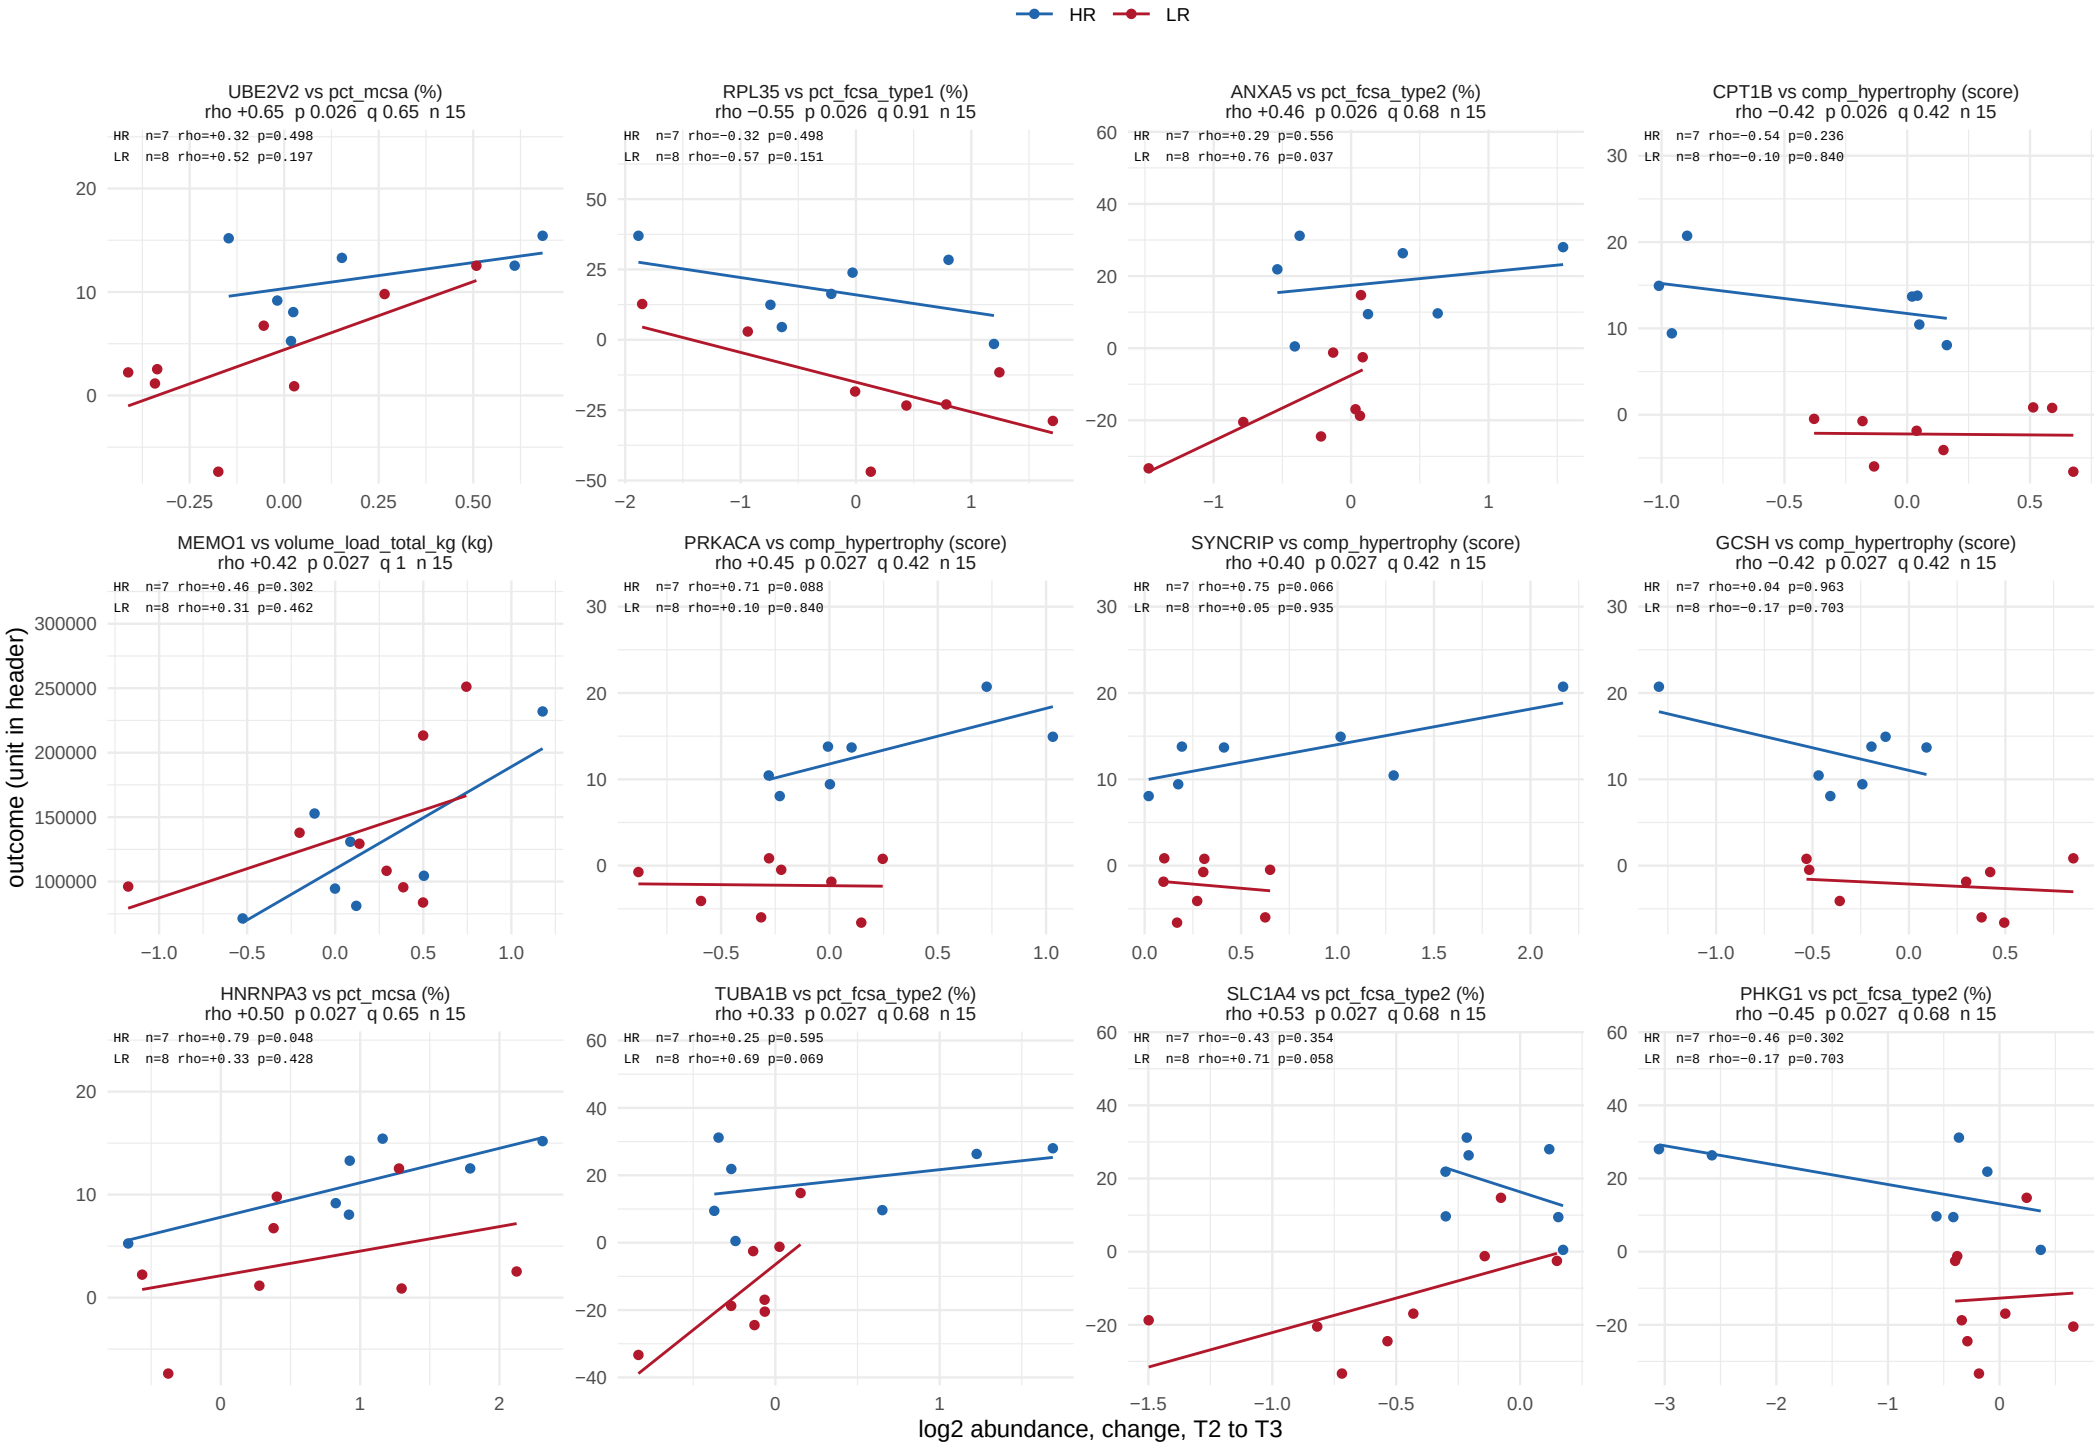

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


763 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 34 of 64.

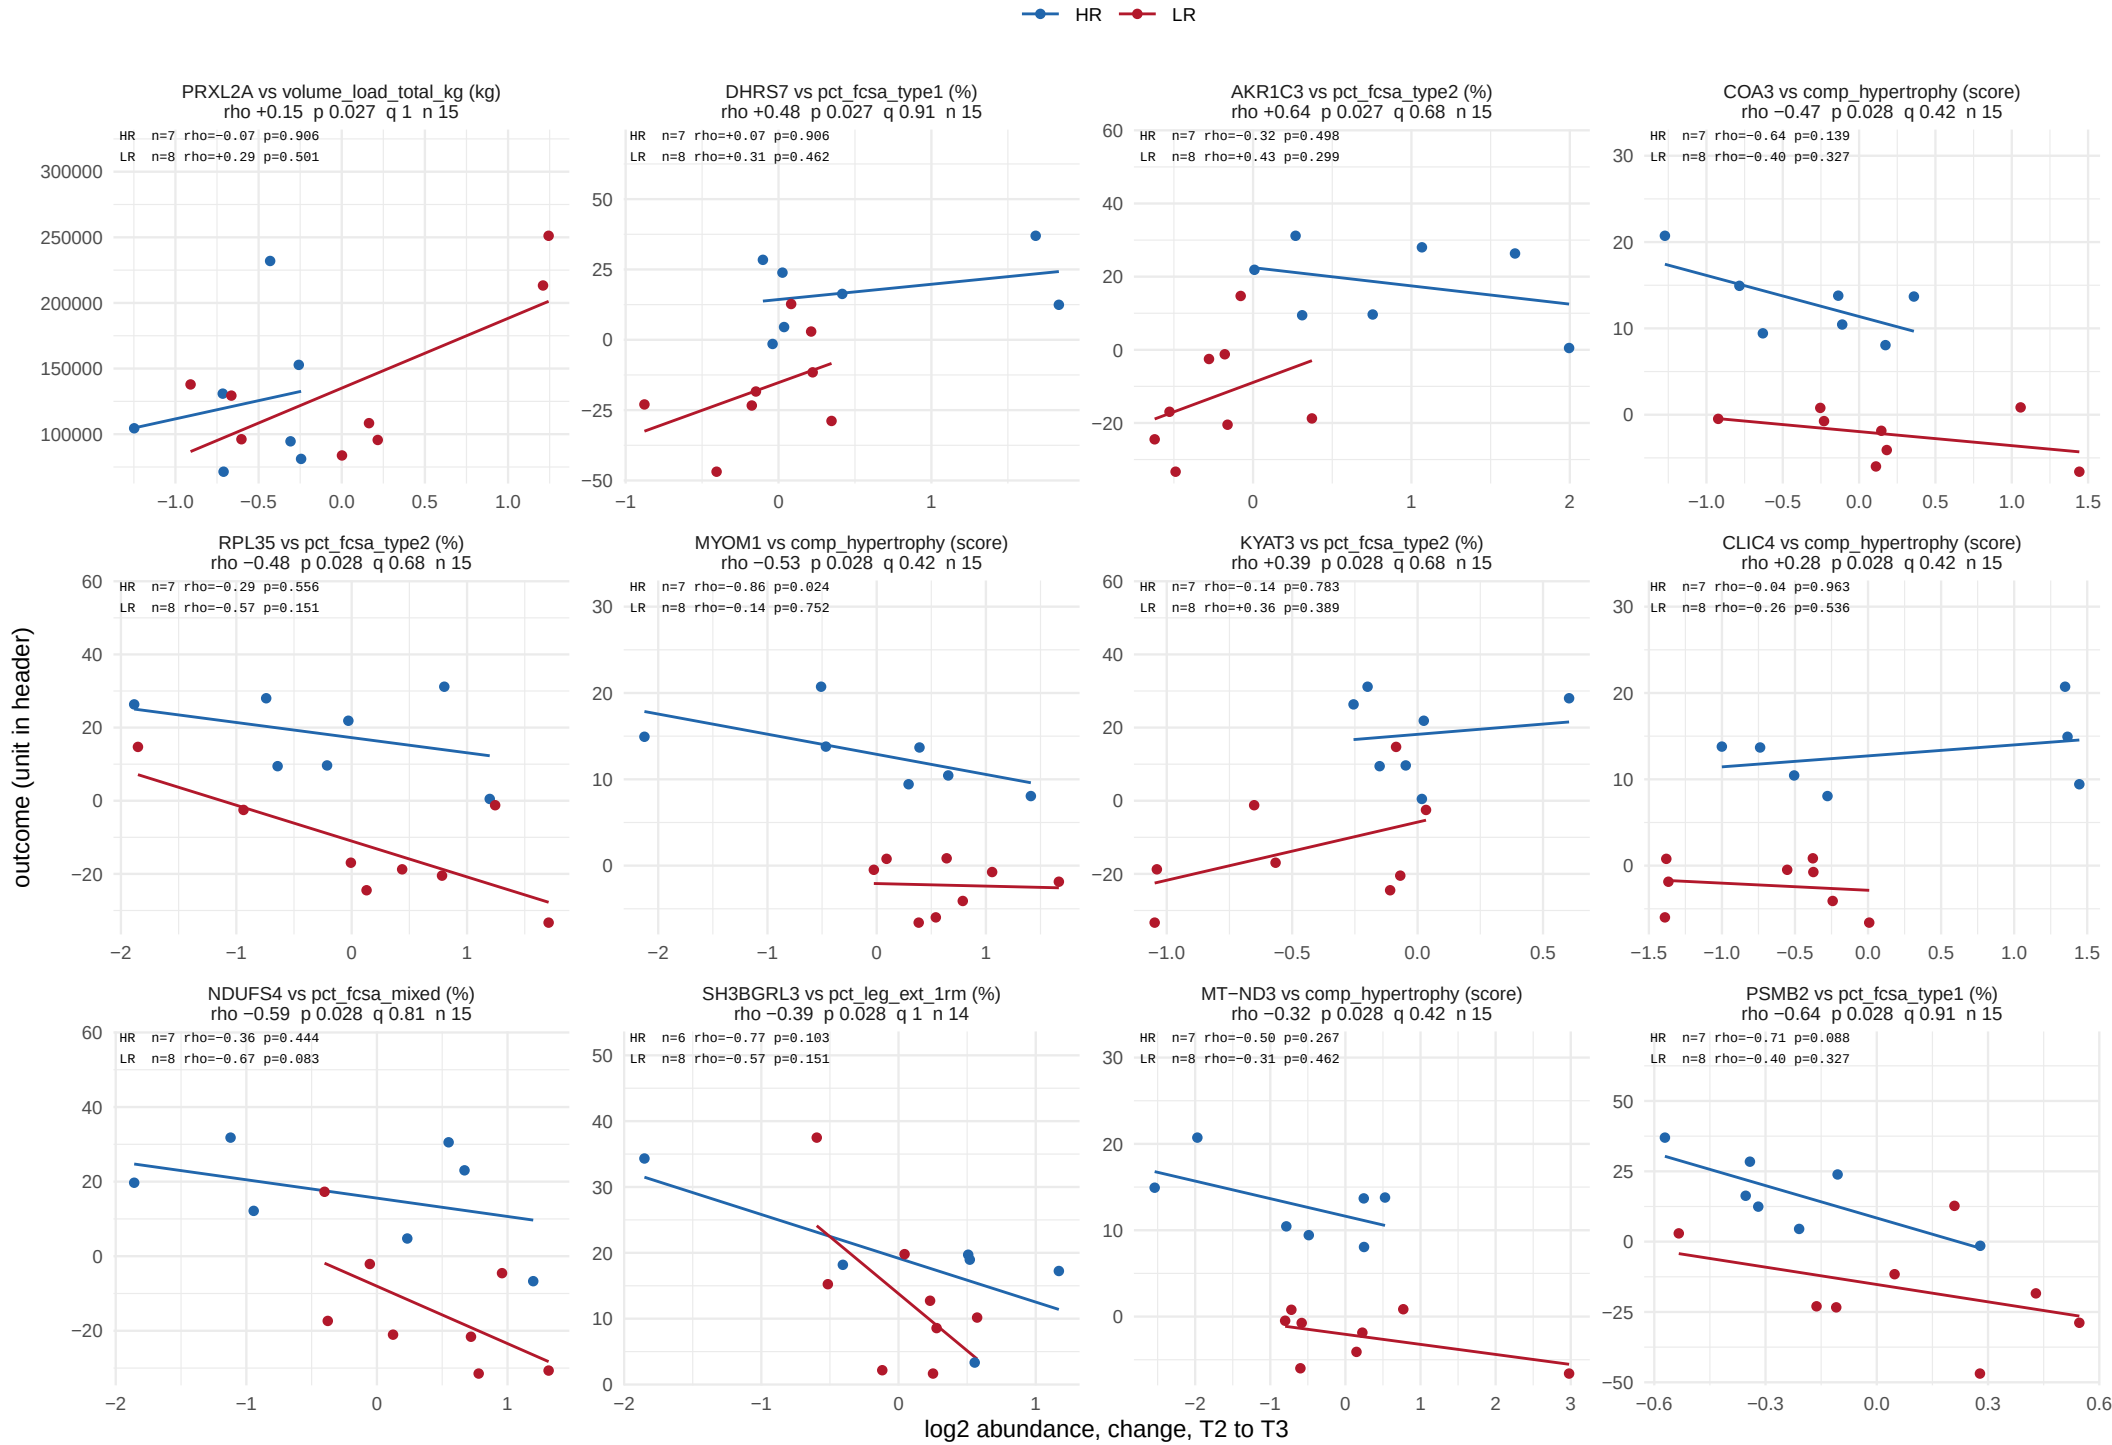

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


763 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 35 of 64.

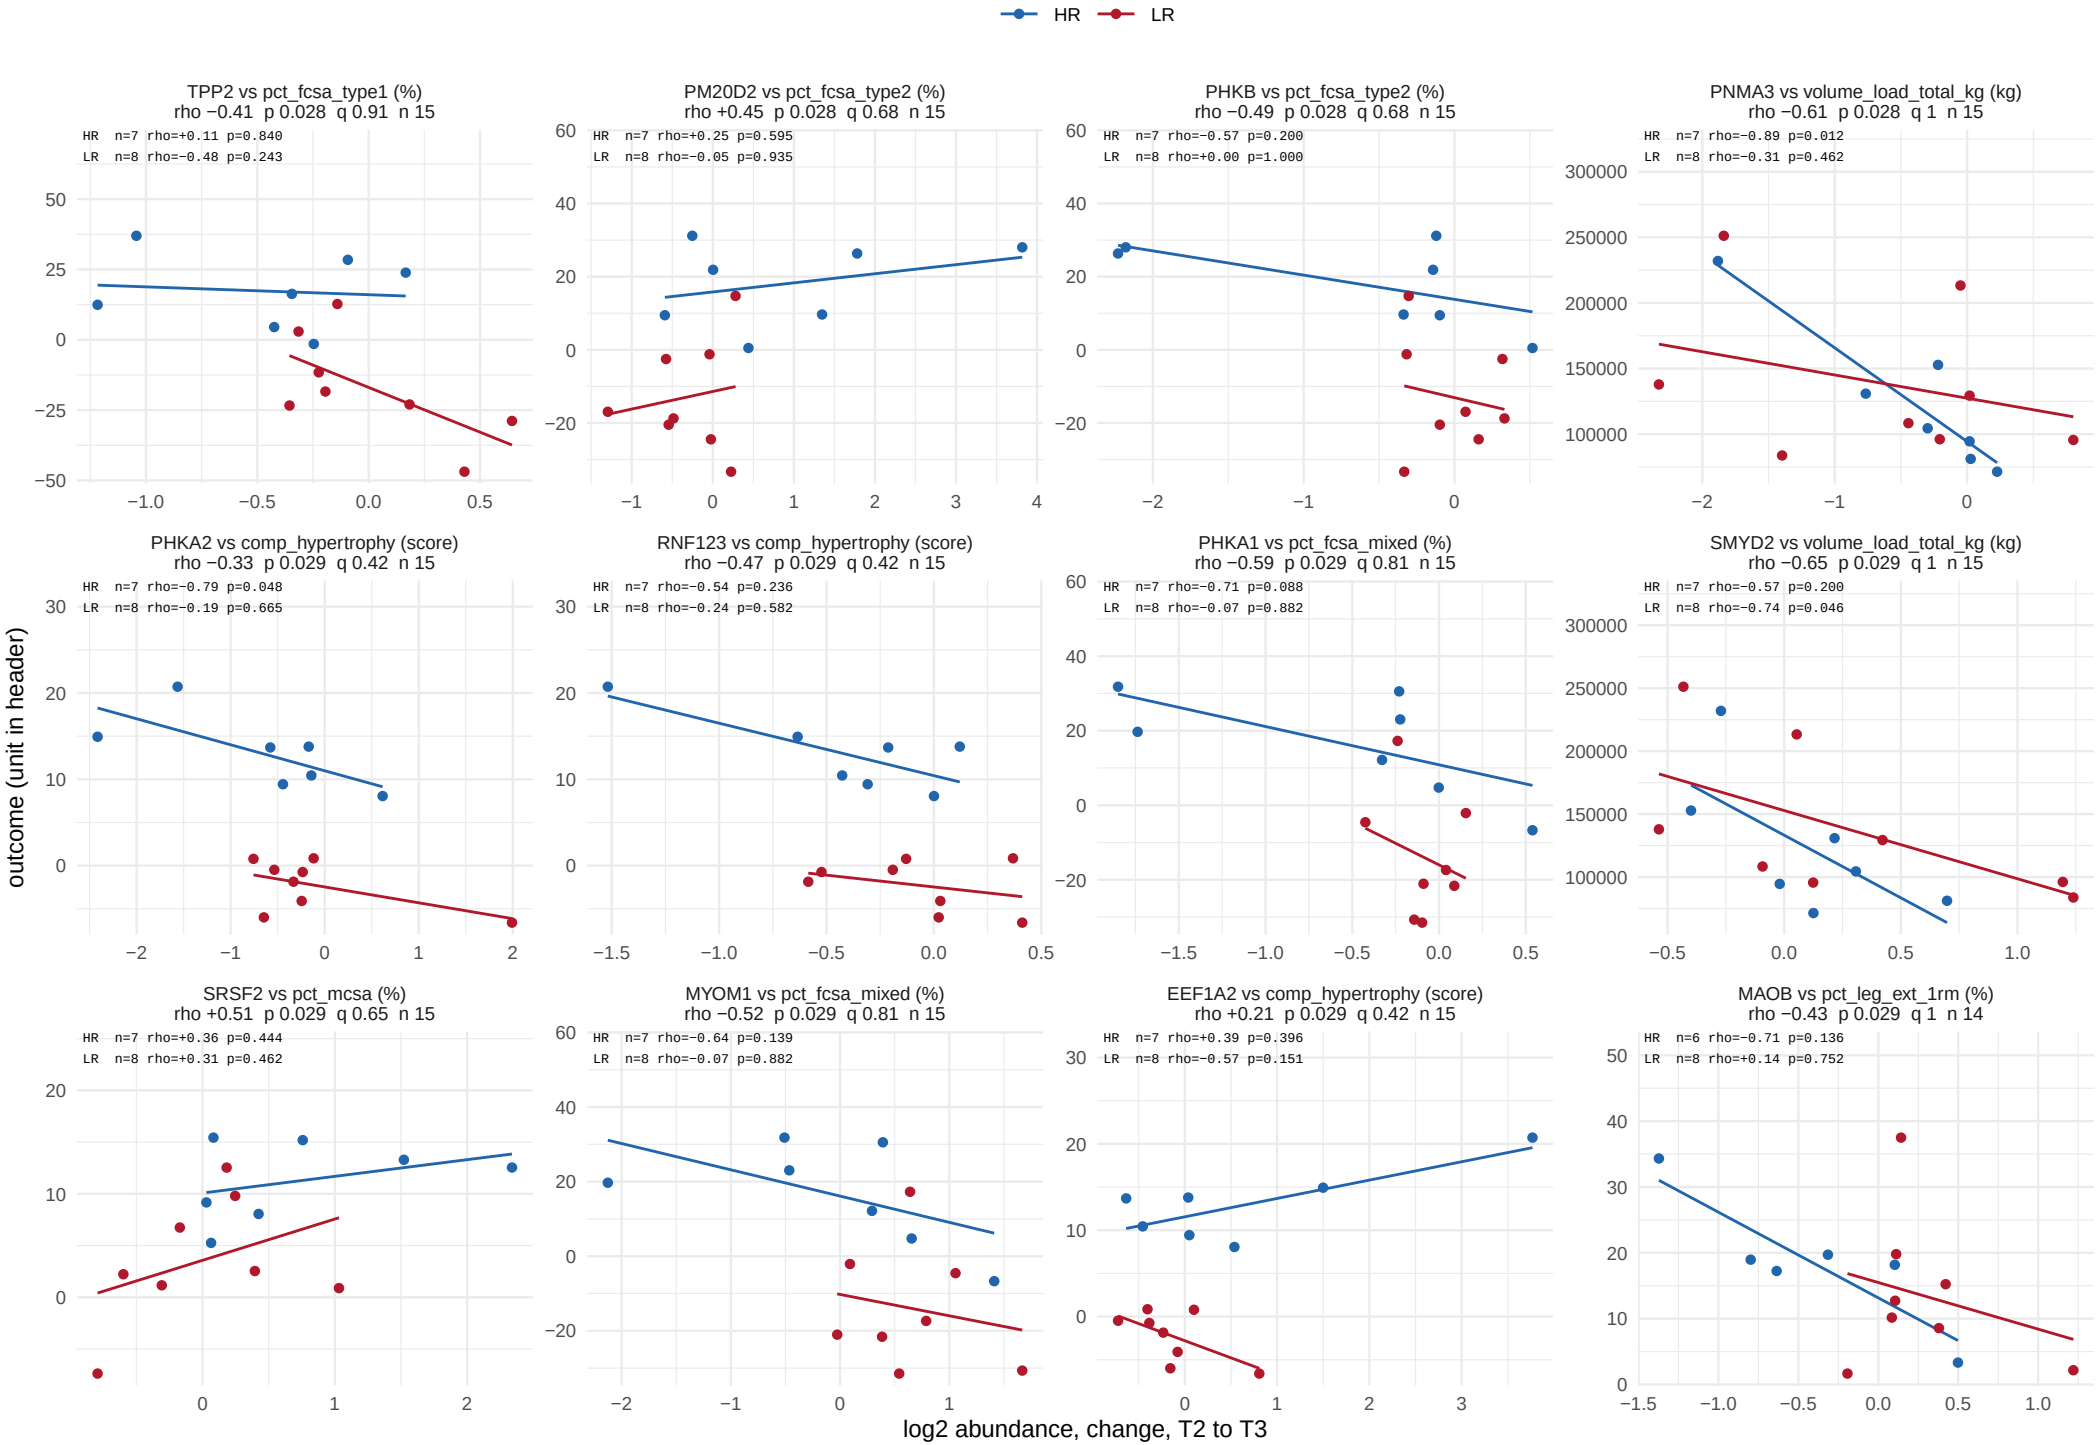

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


763 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 36 of 64.

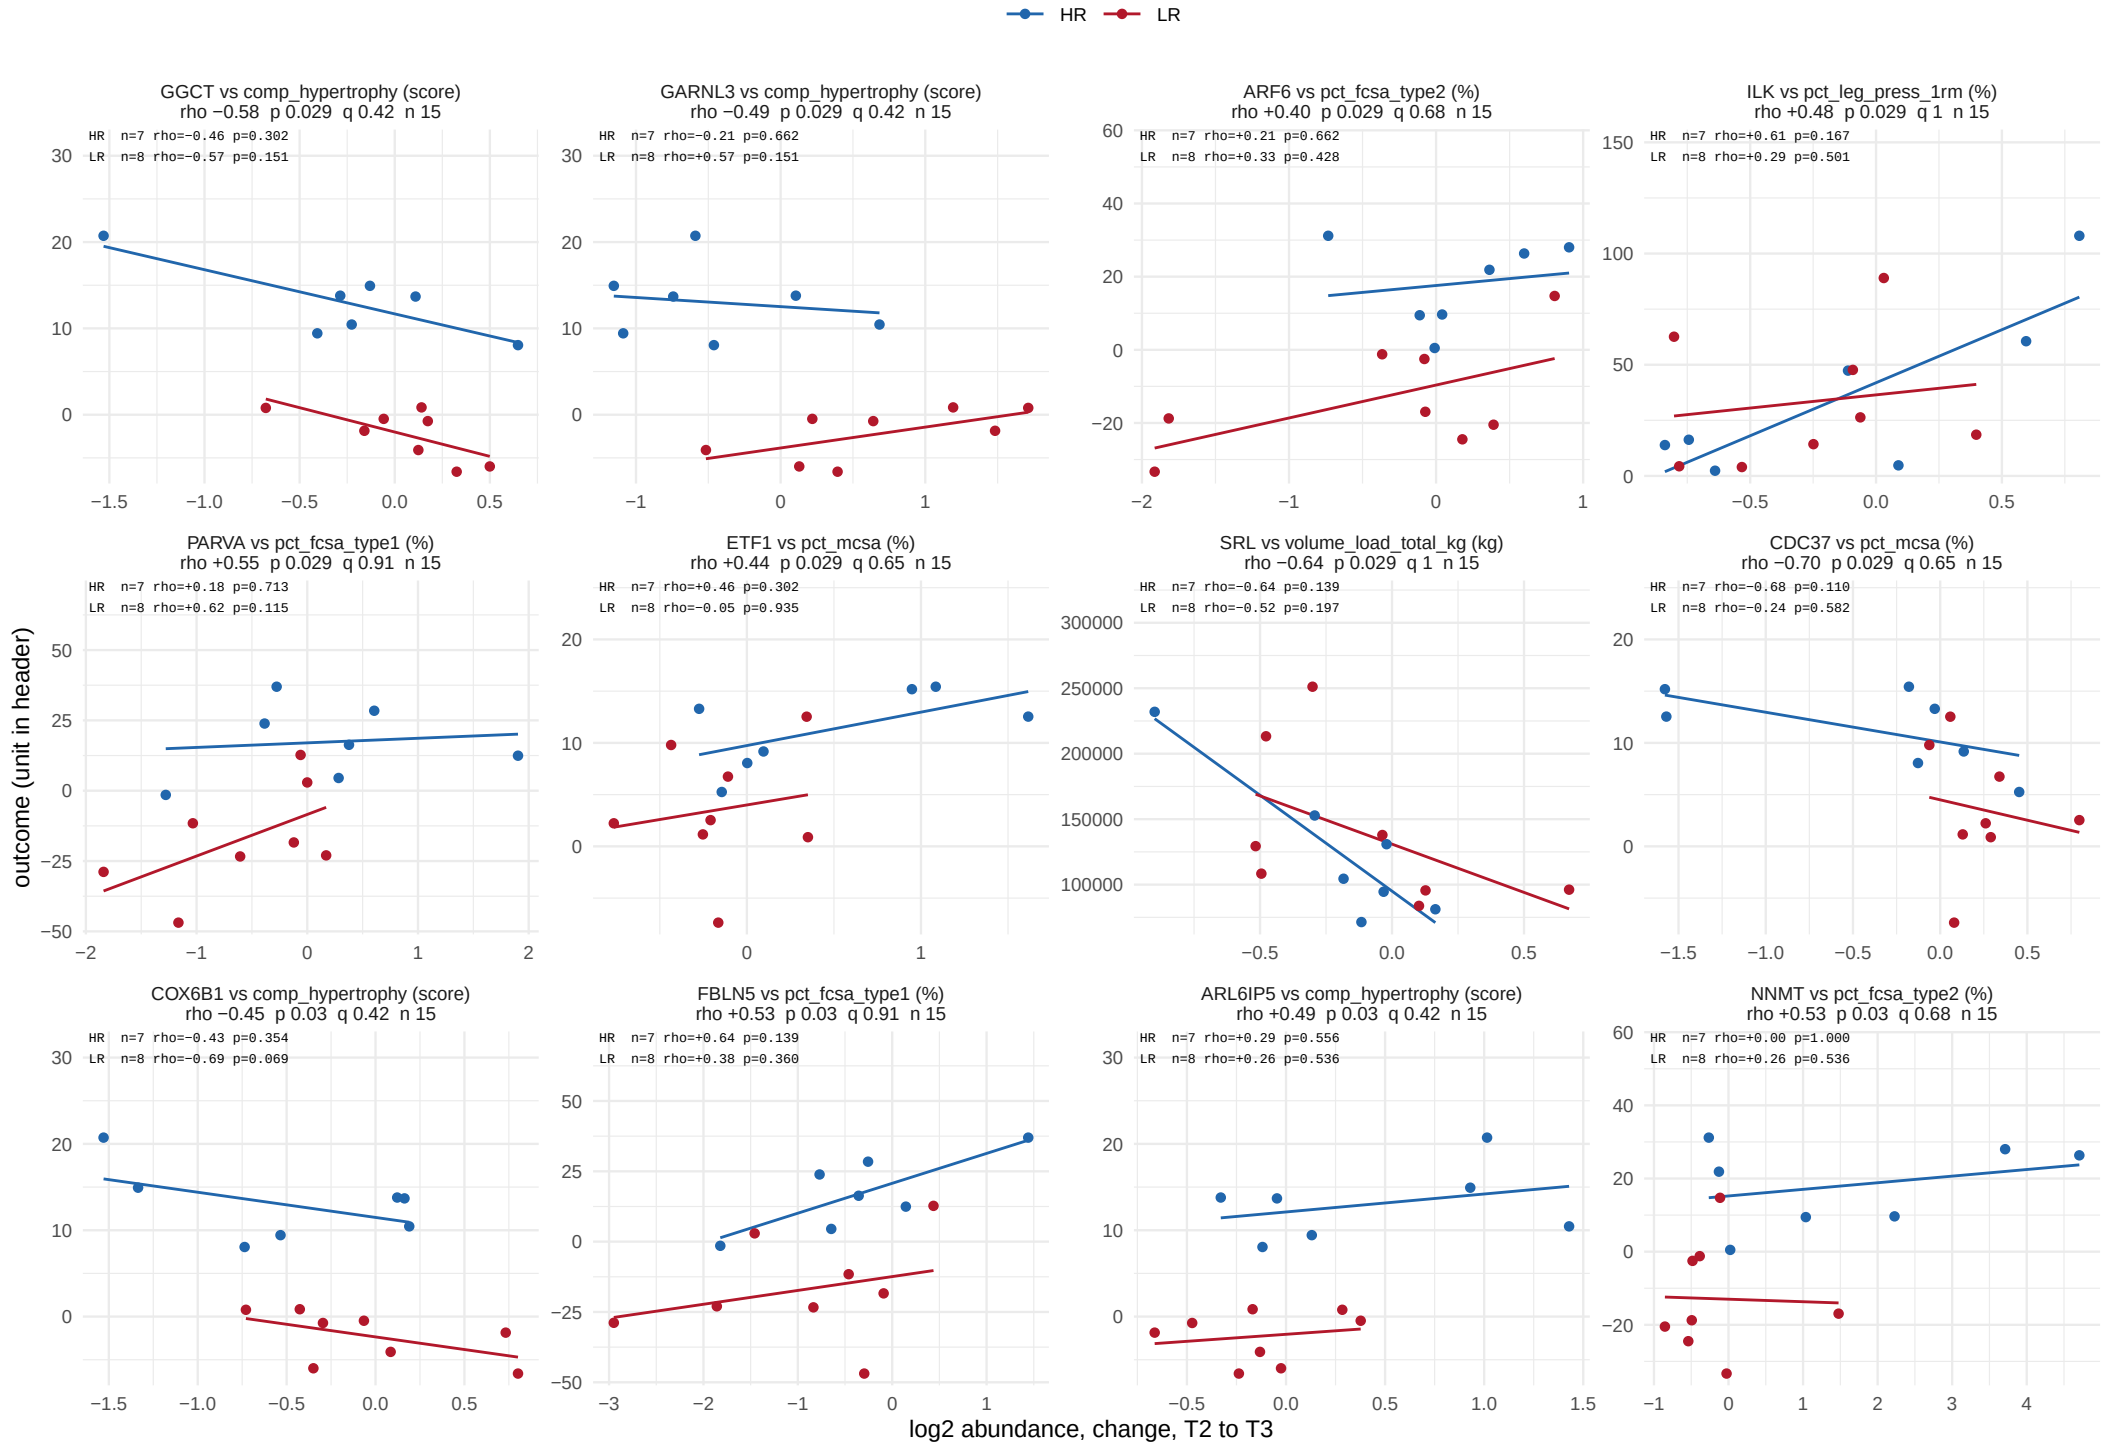

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window

763 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 37 of 64.

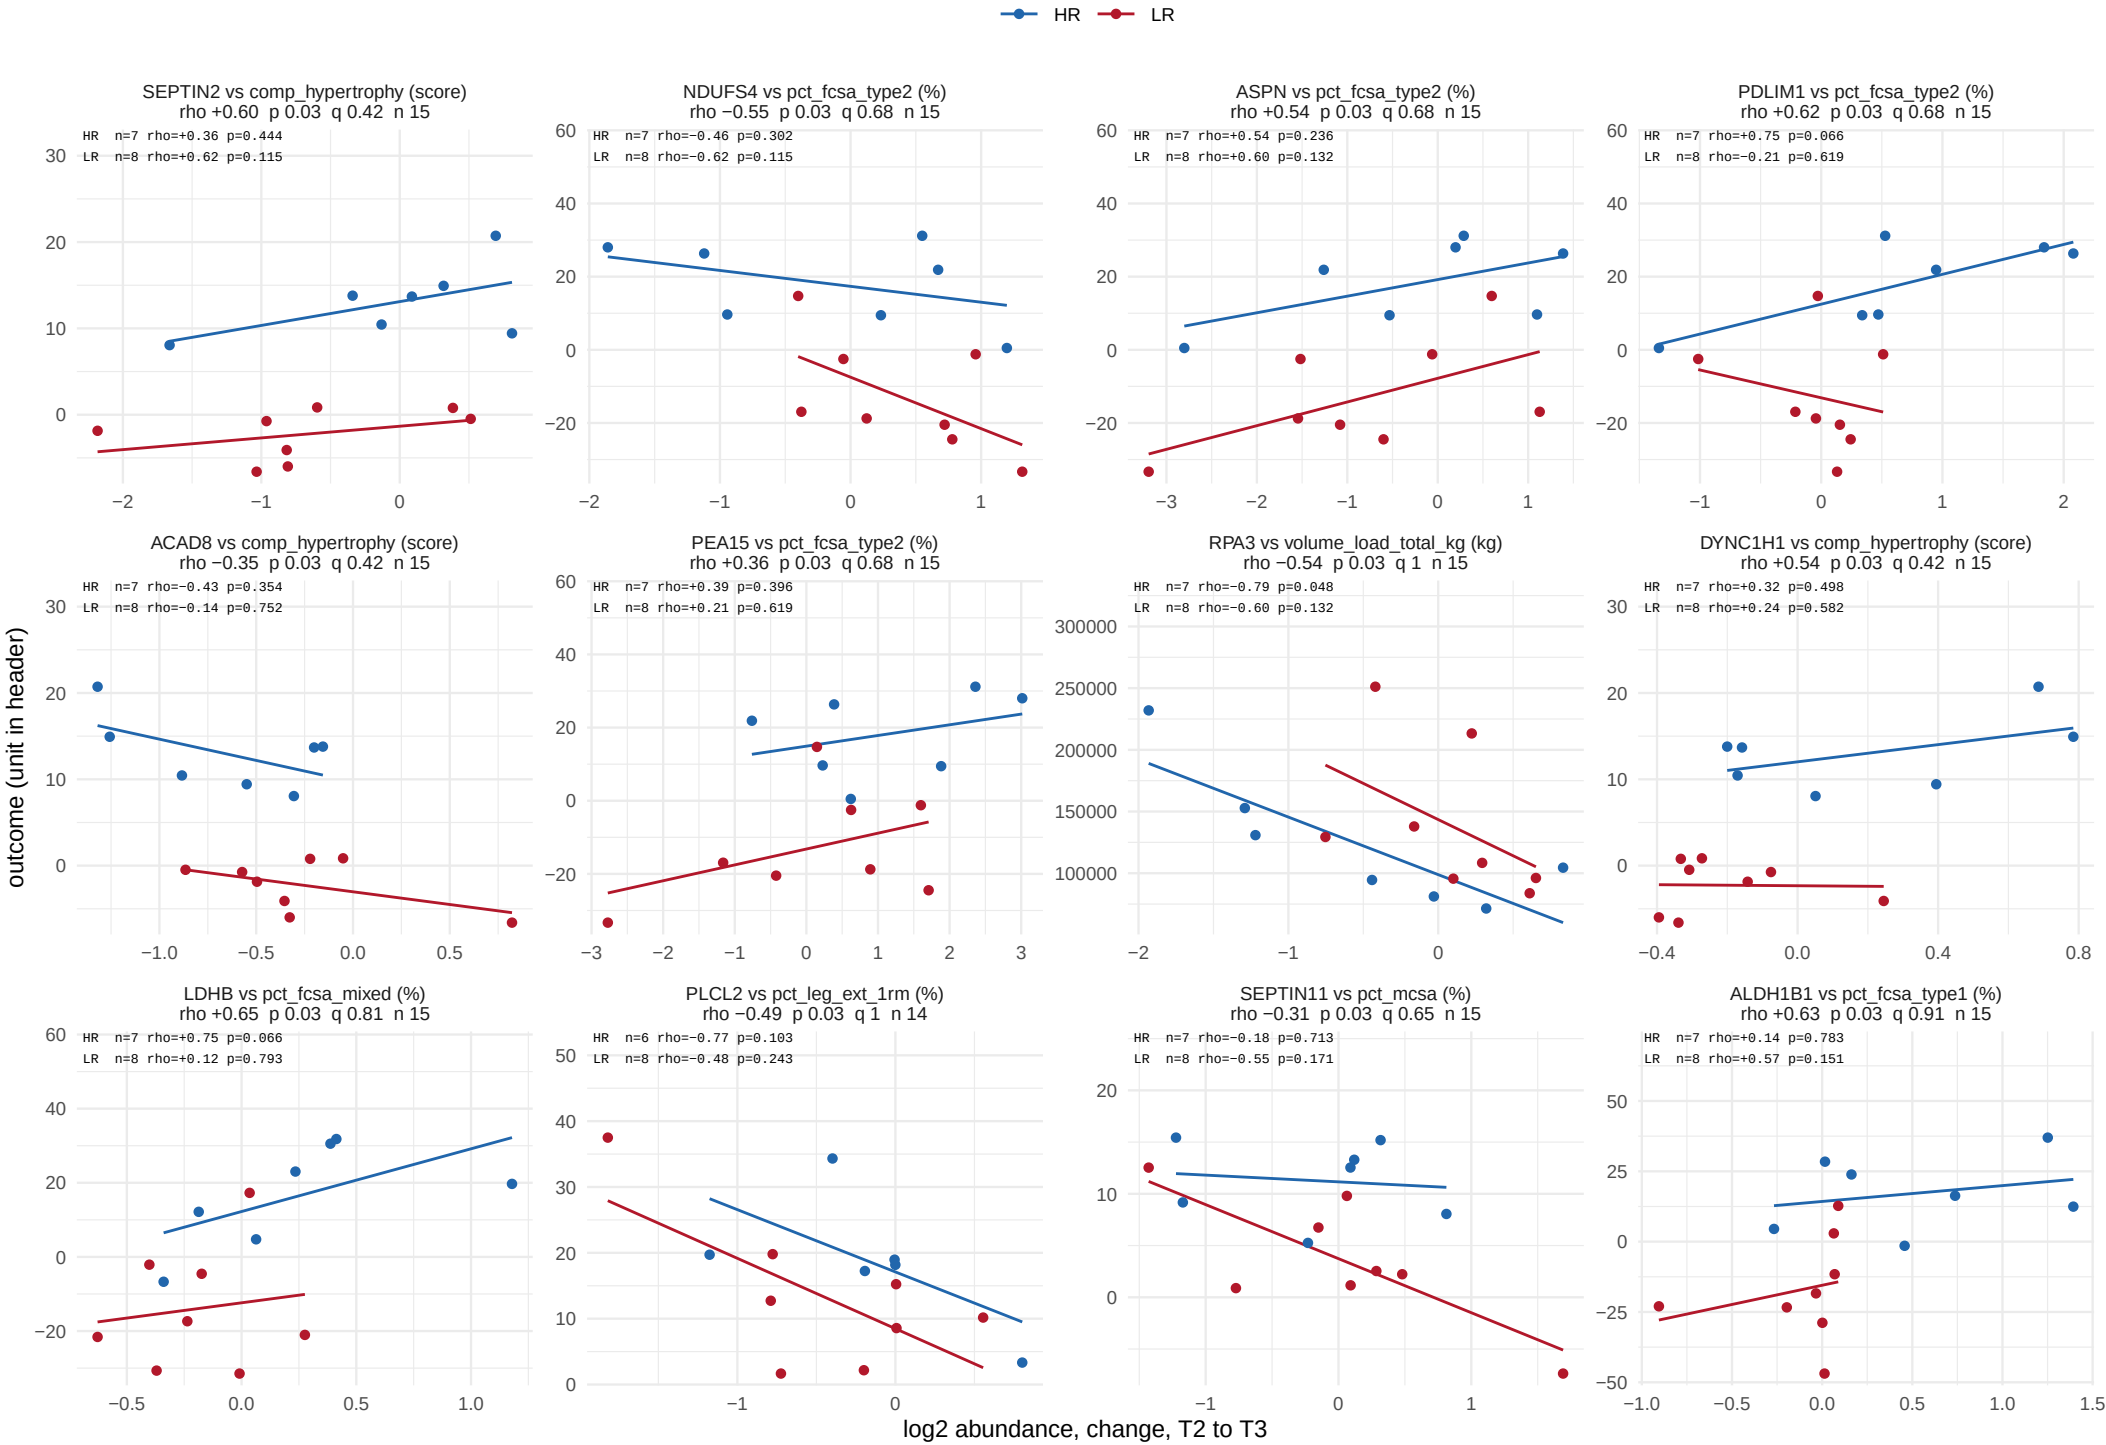

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


763 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 38 of 64.



One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


763 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 39 of 64.

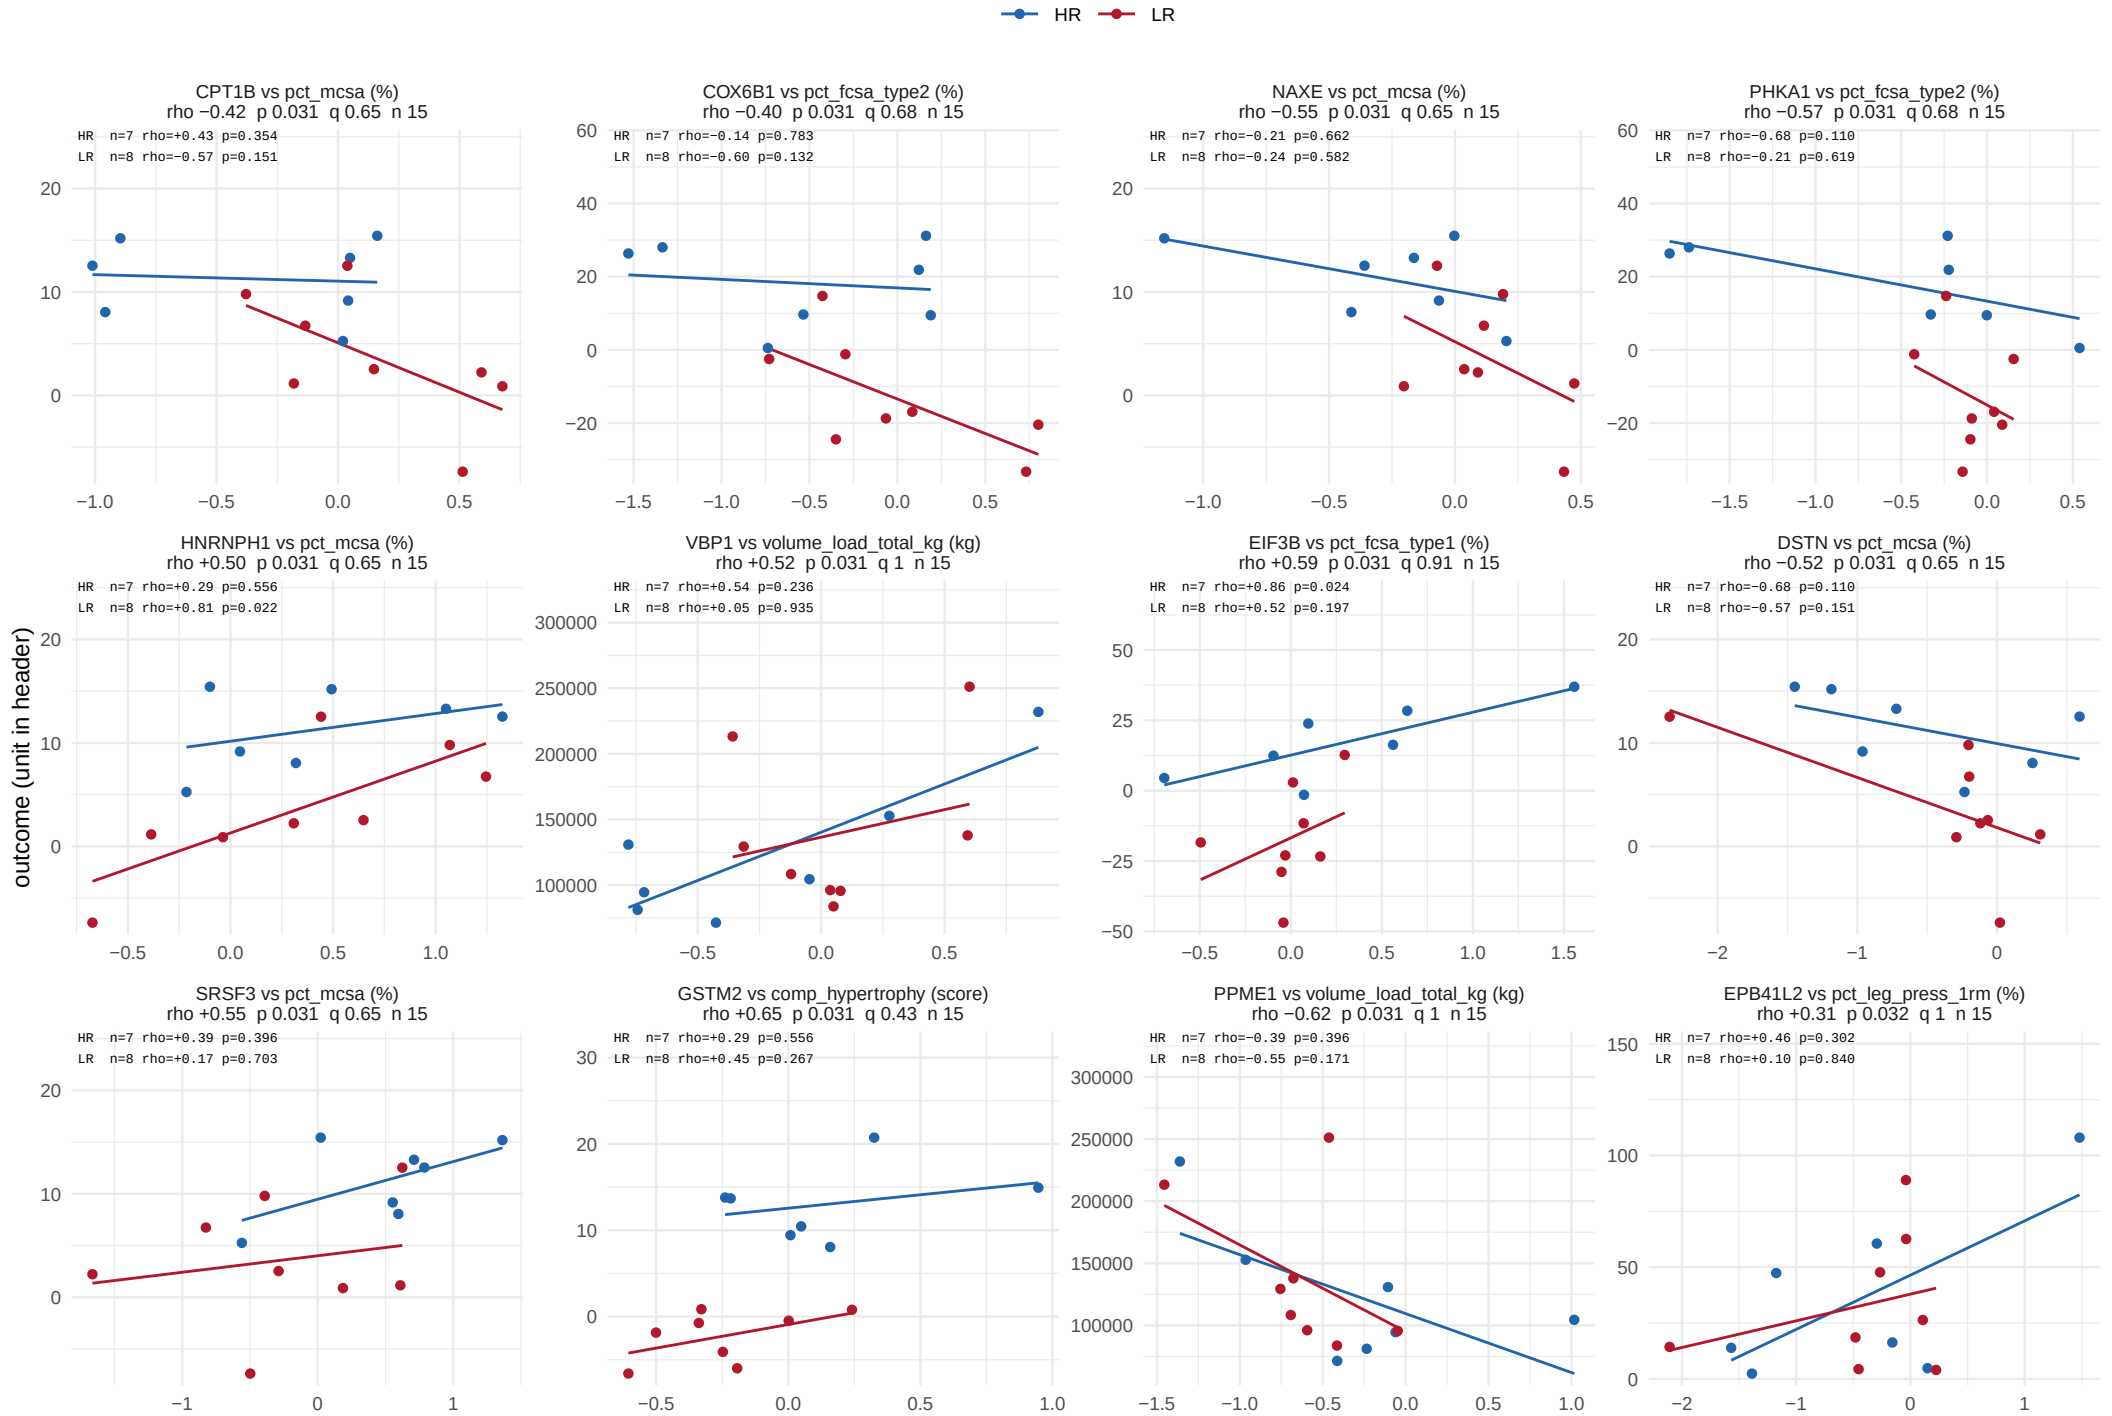

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


763 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 40 of 64.

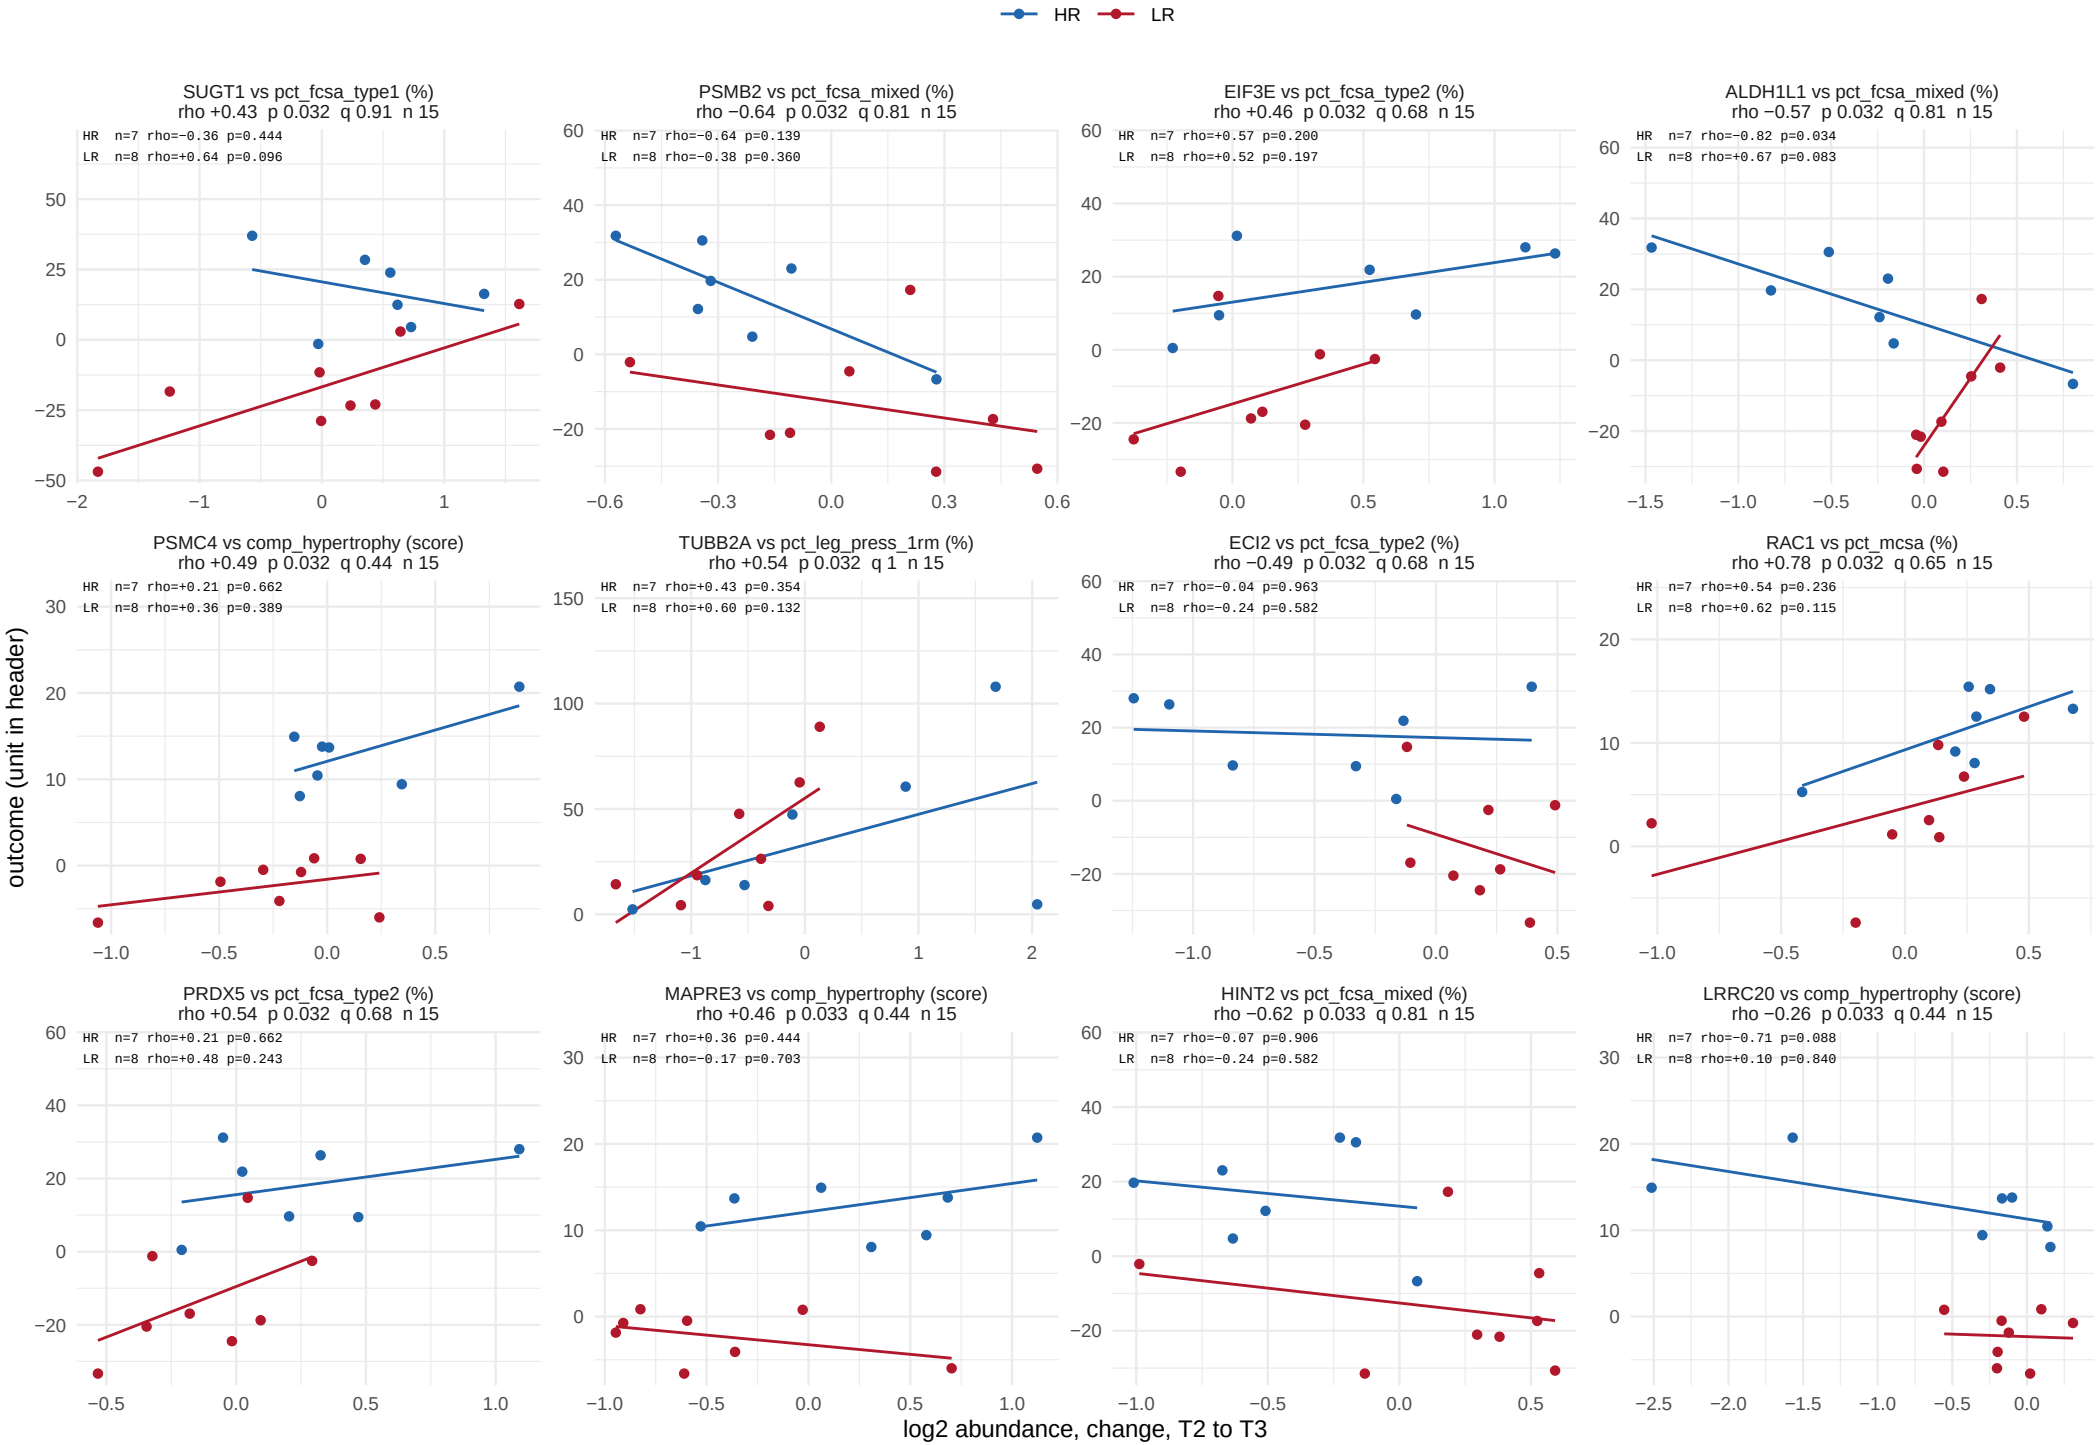

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


763 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 41 of 64.

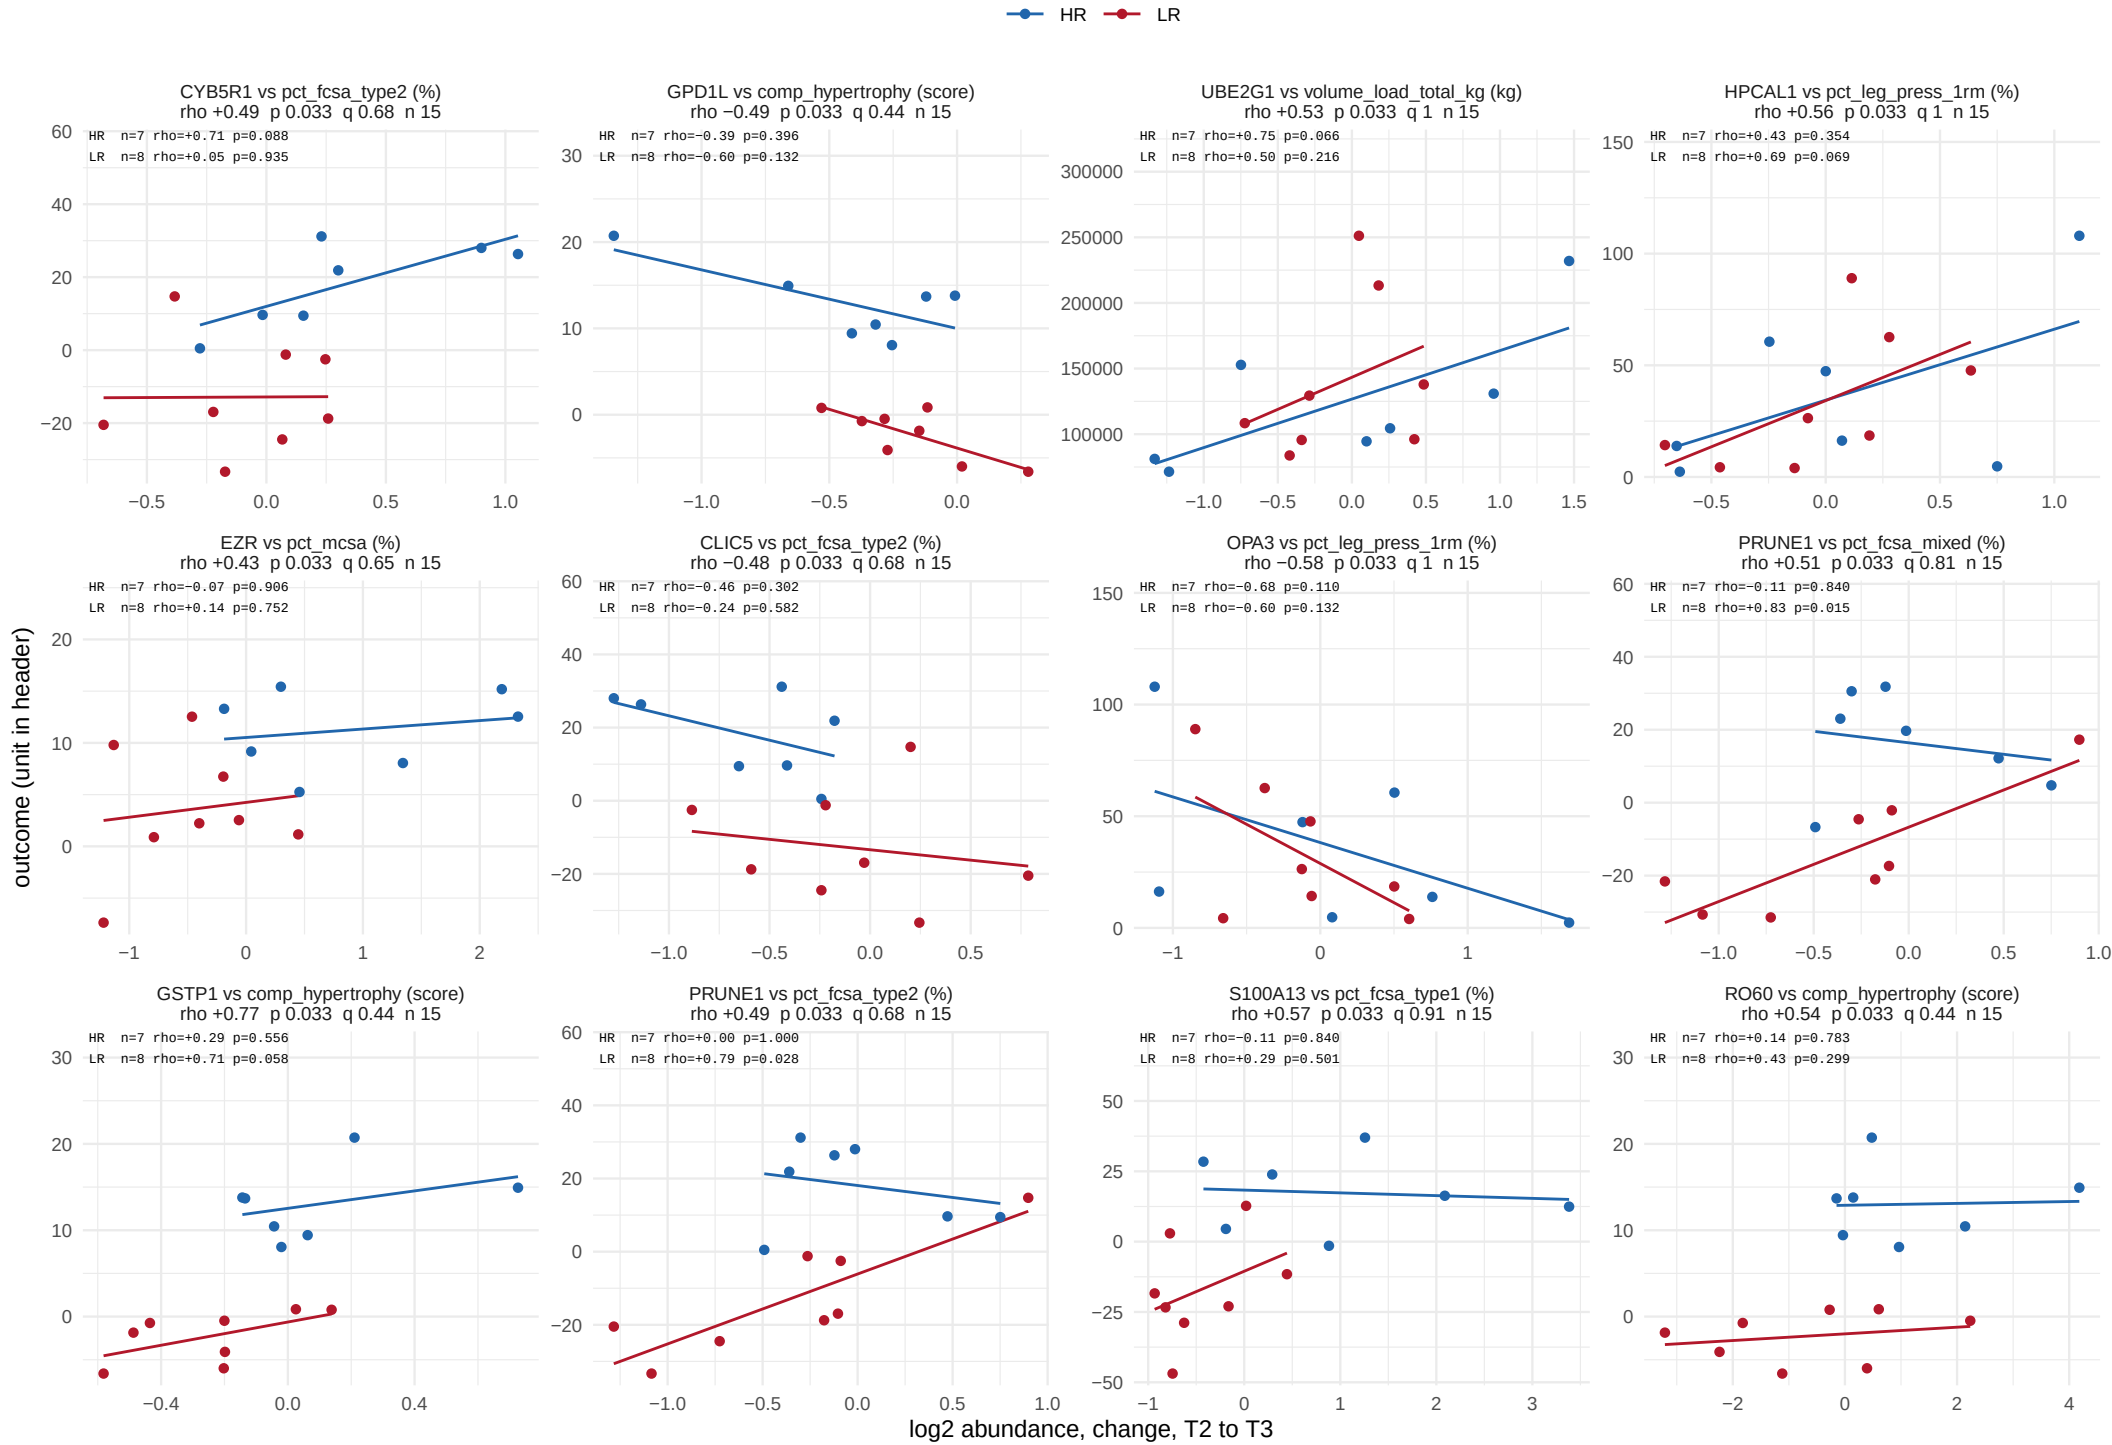

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


763 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 42 of 64.

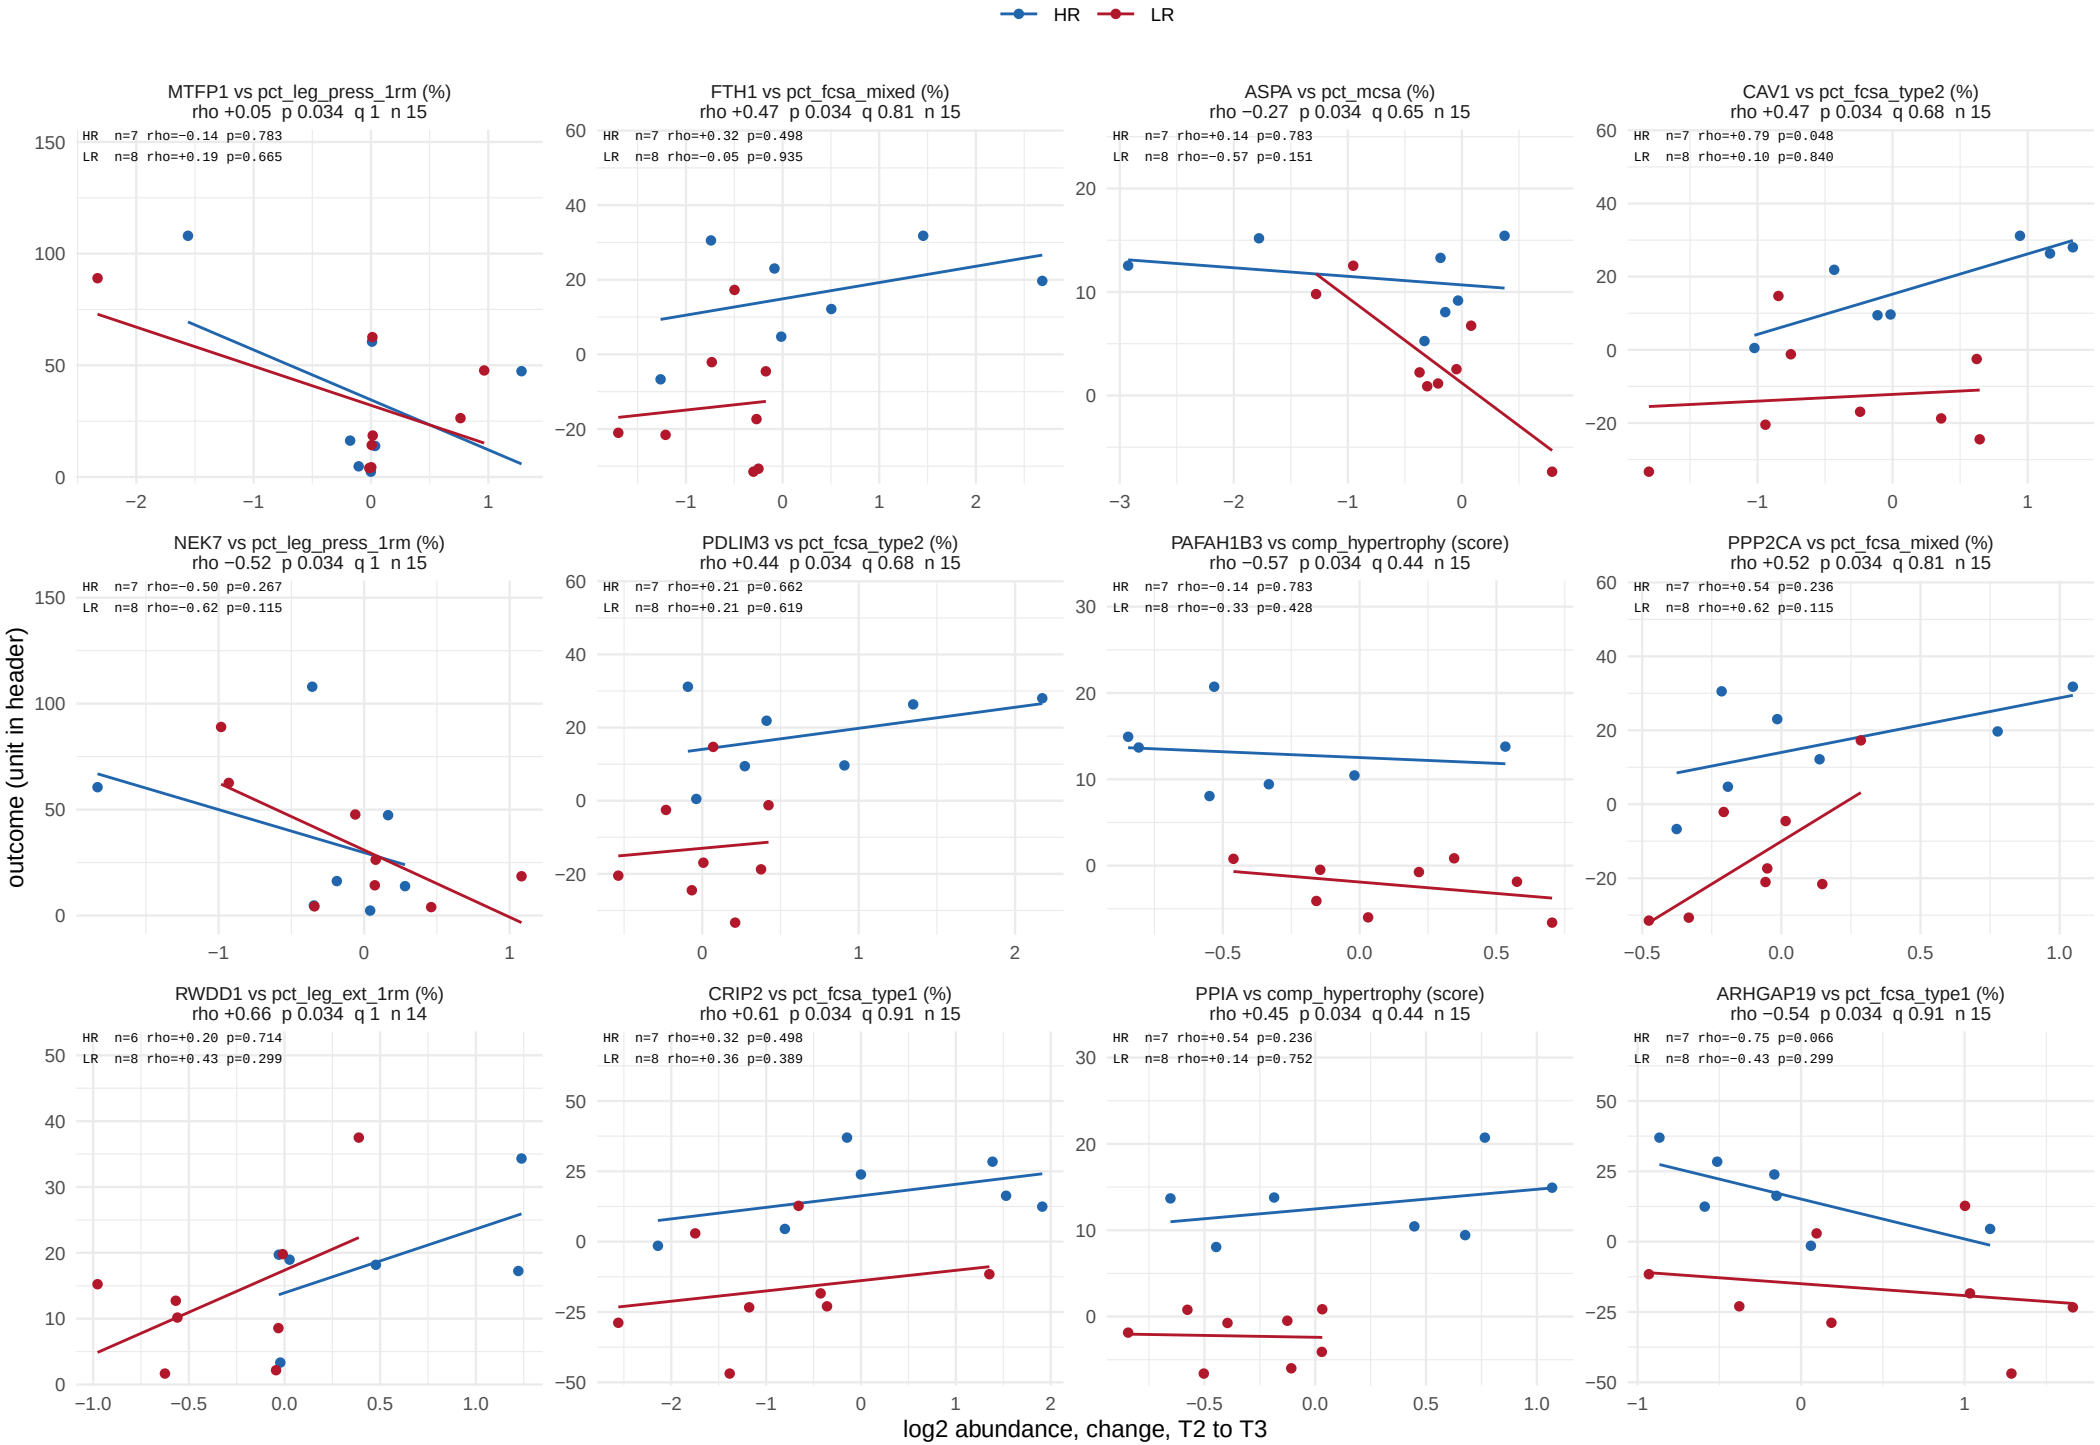

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


763 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 43 of 64.

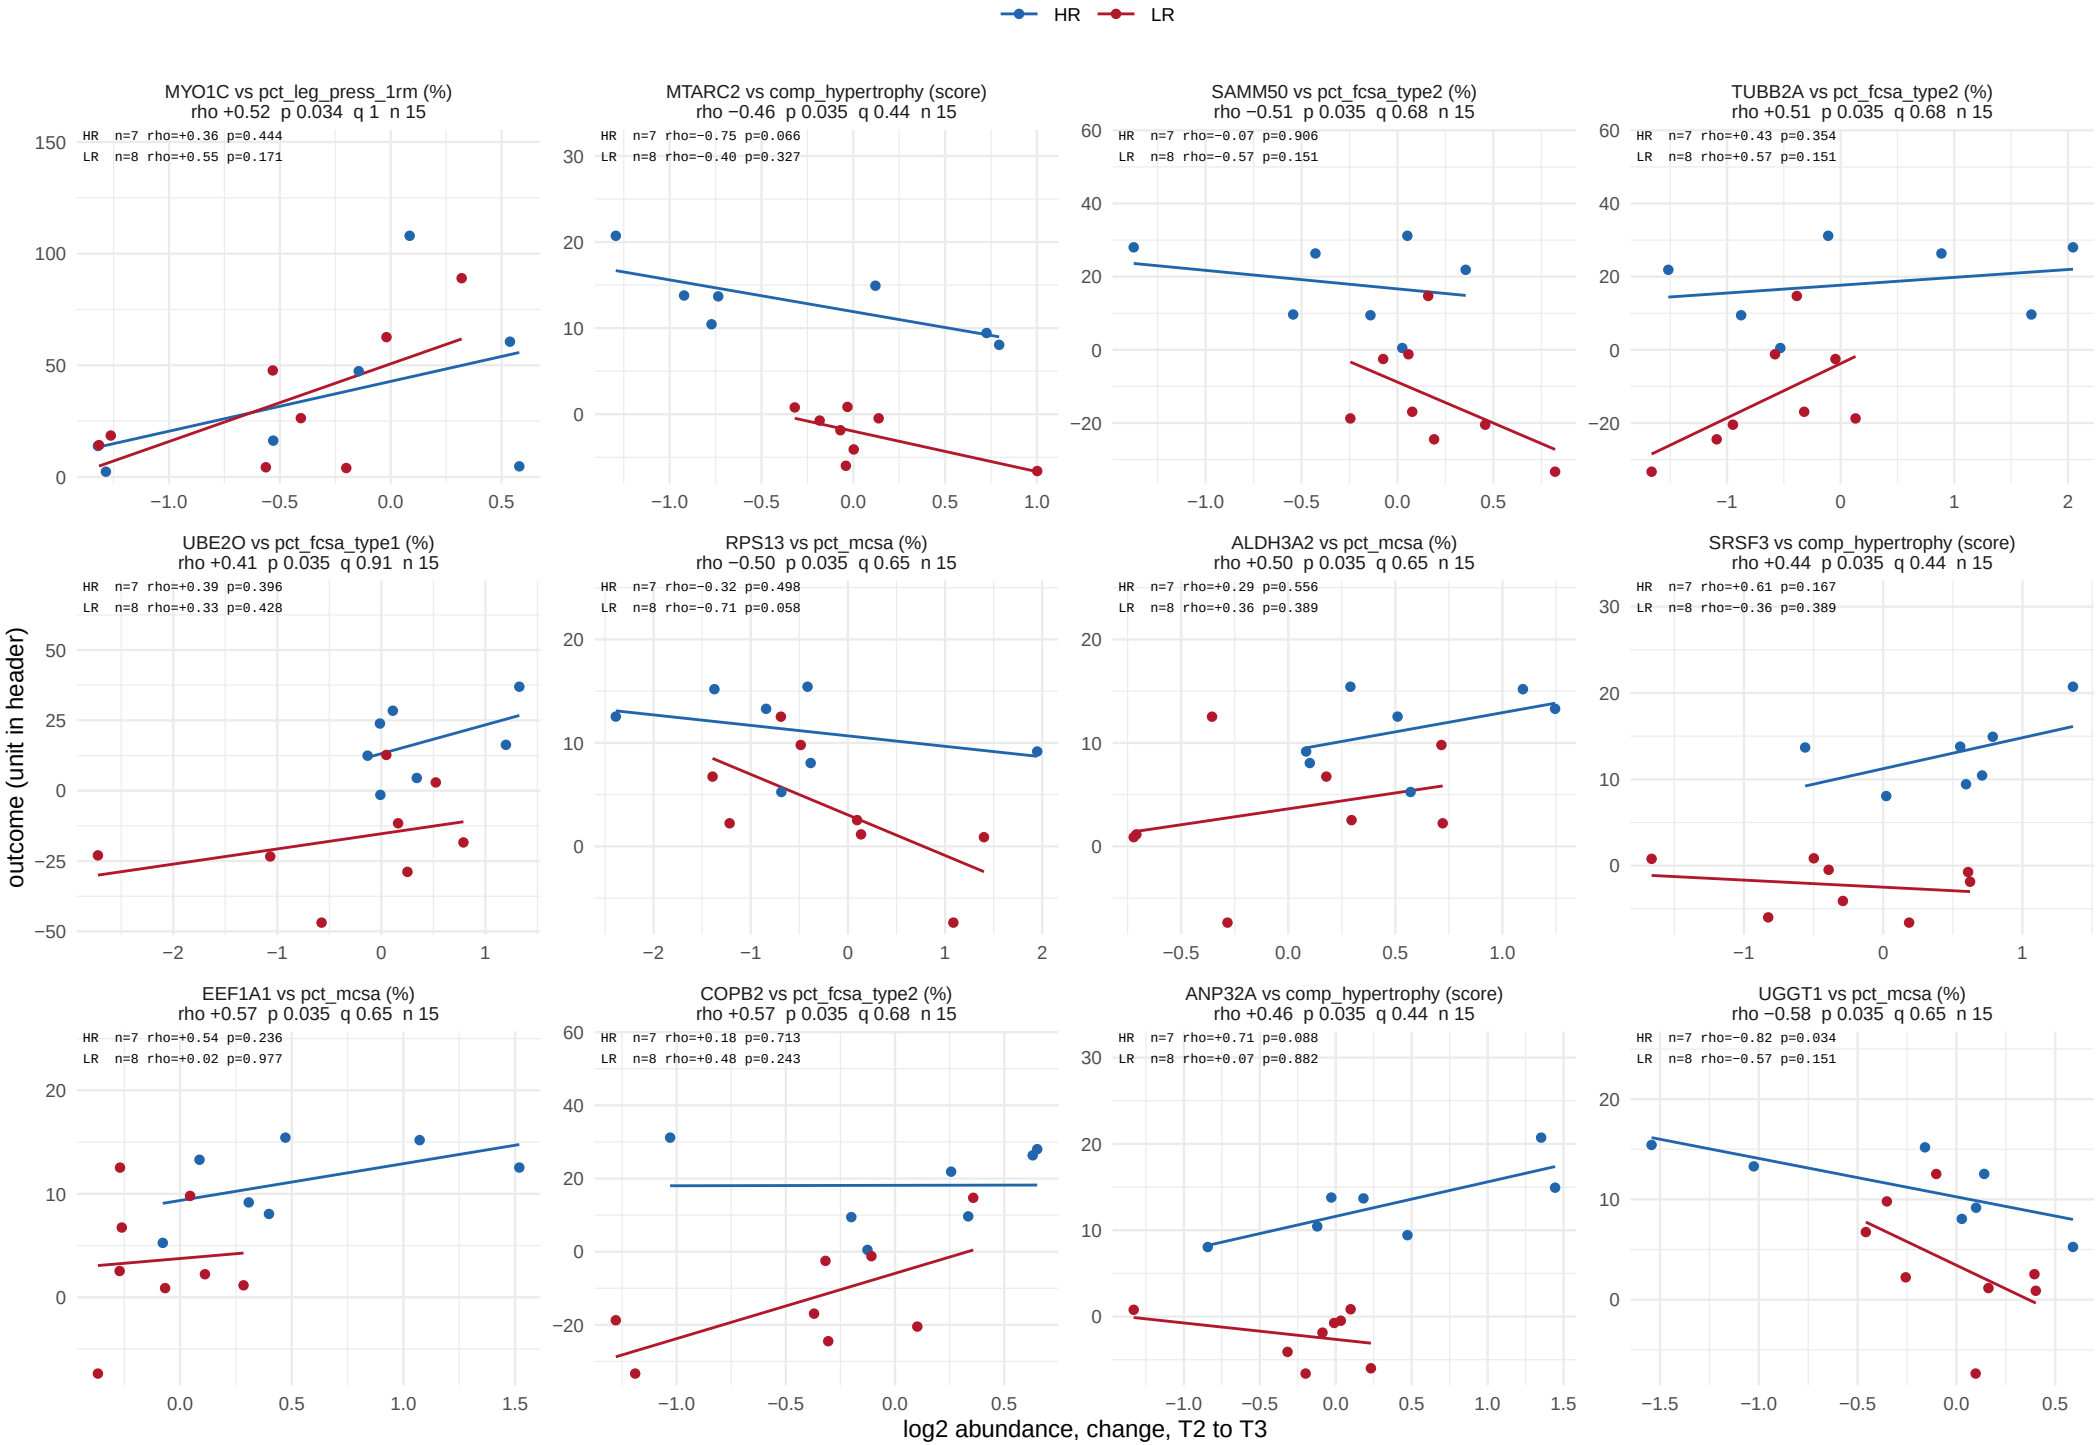

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


763 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 44 of 64.

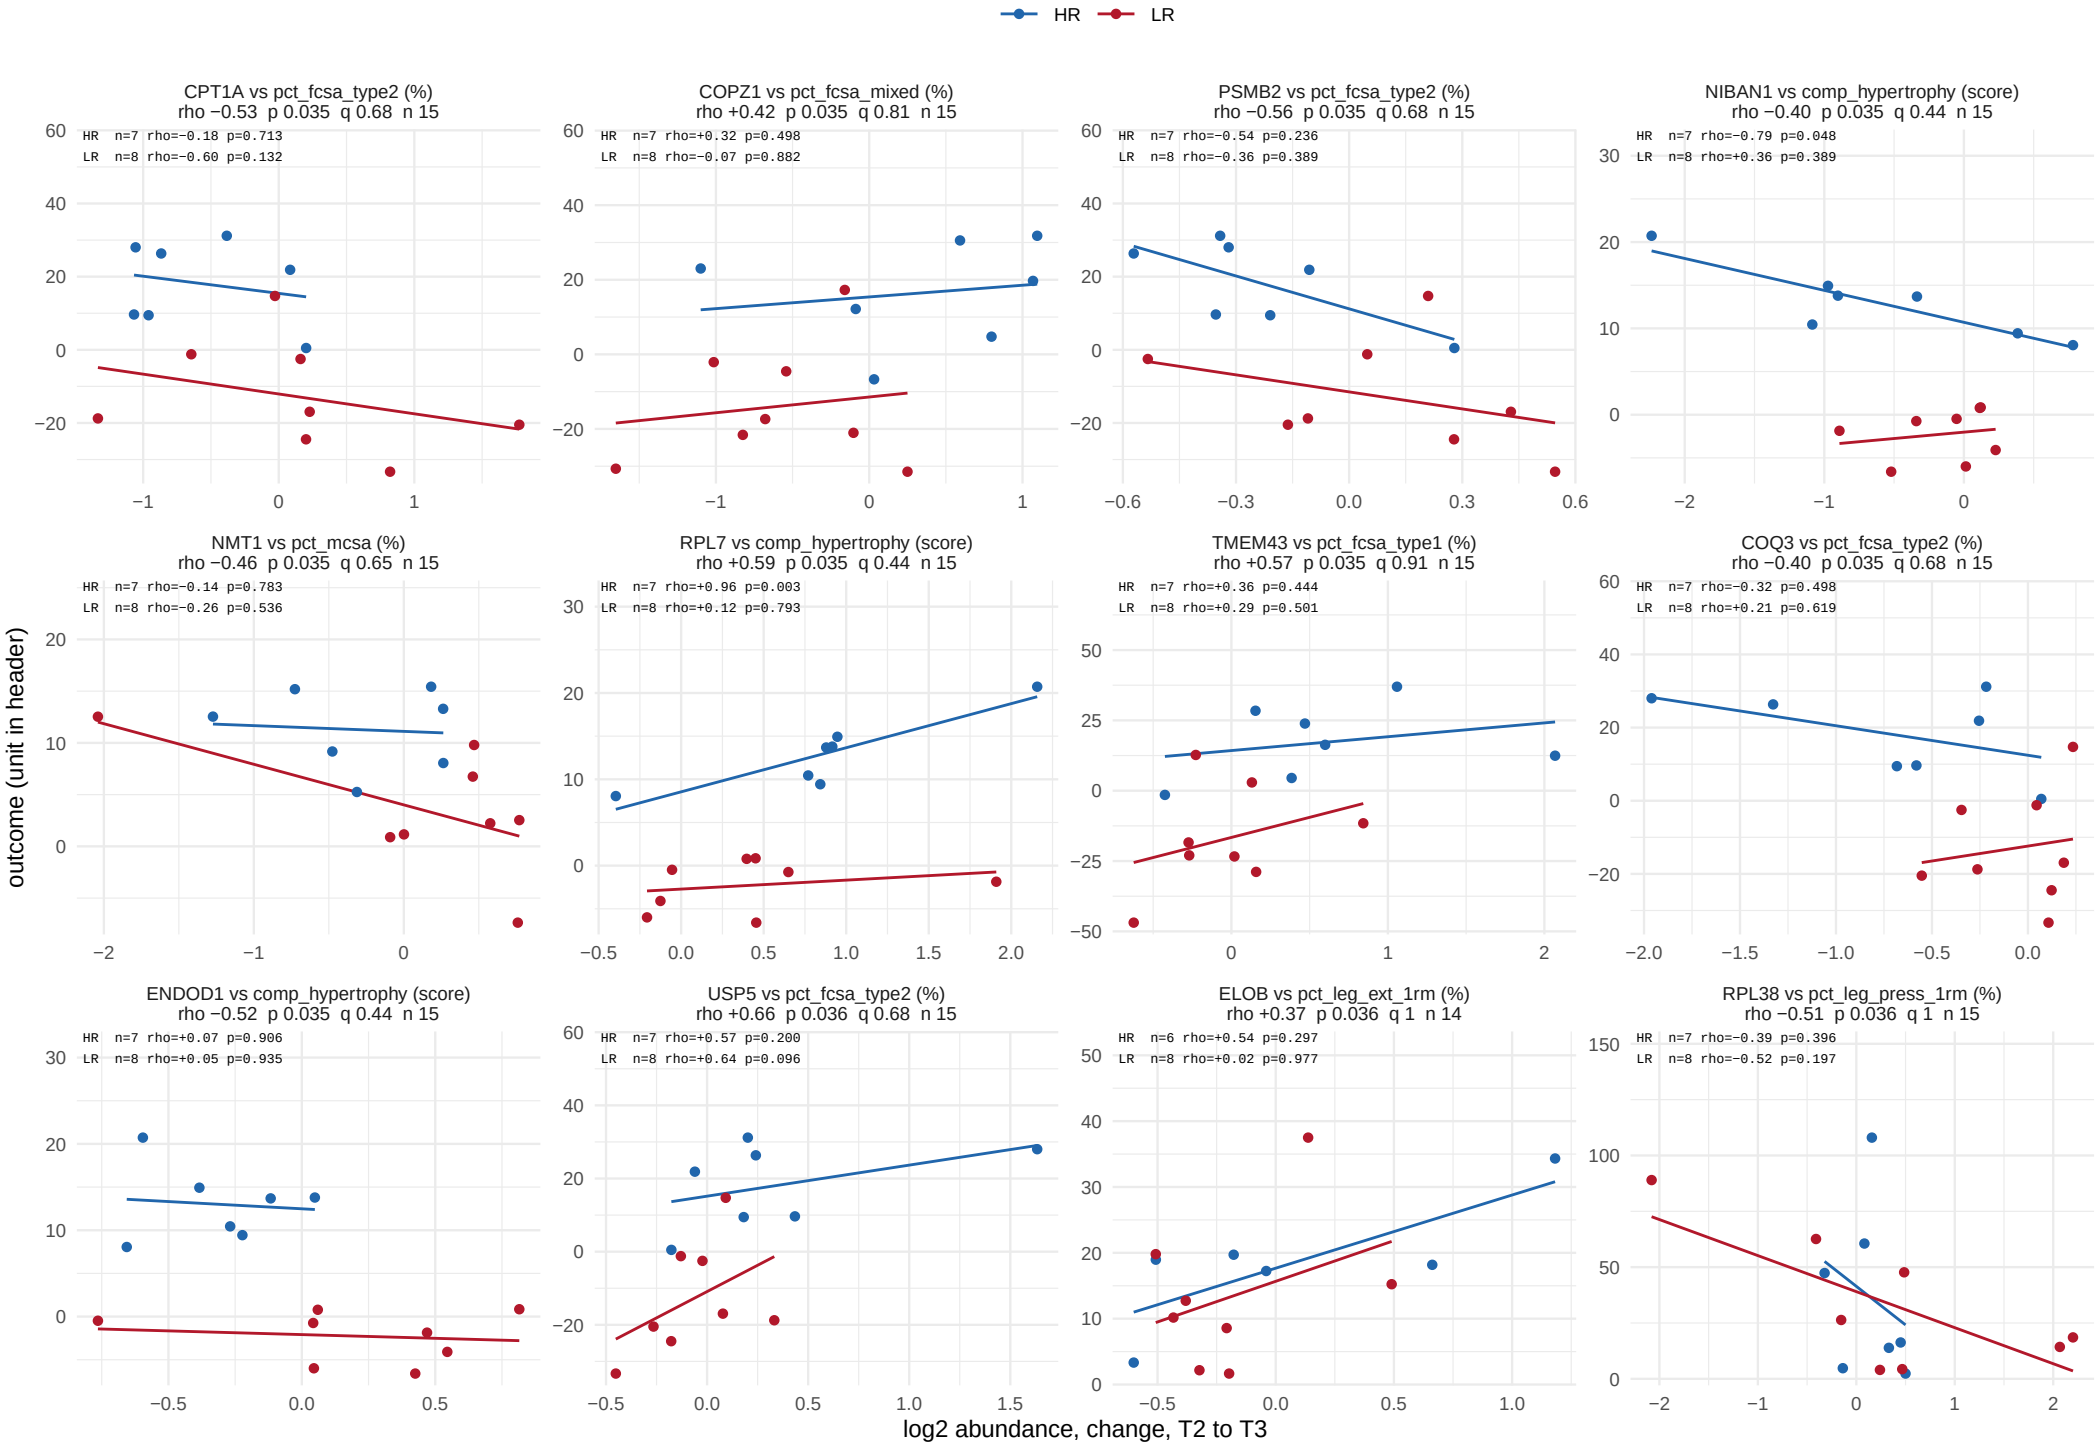

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


763 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 45 of 64.

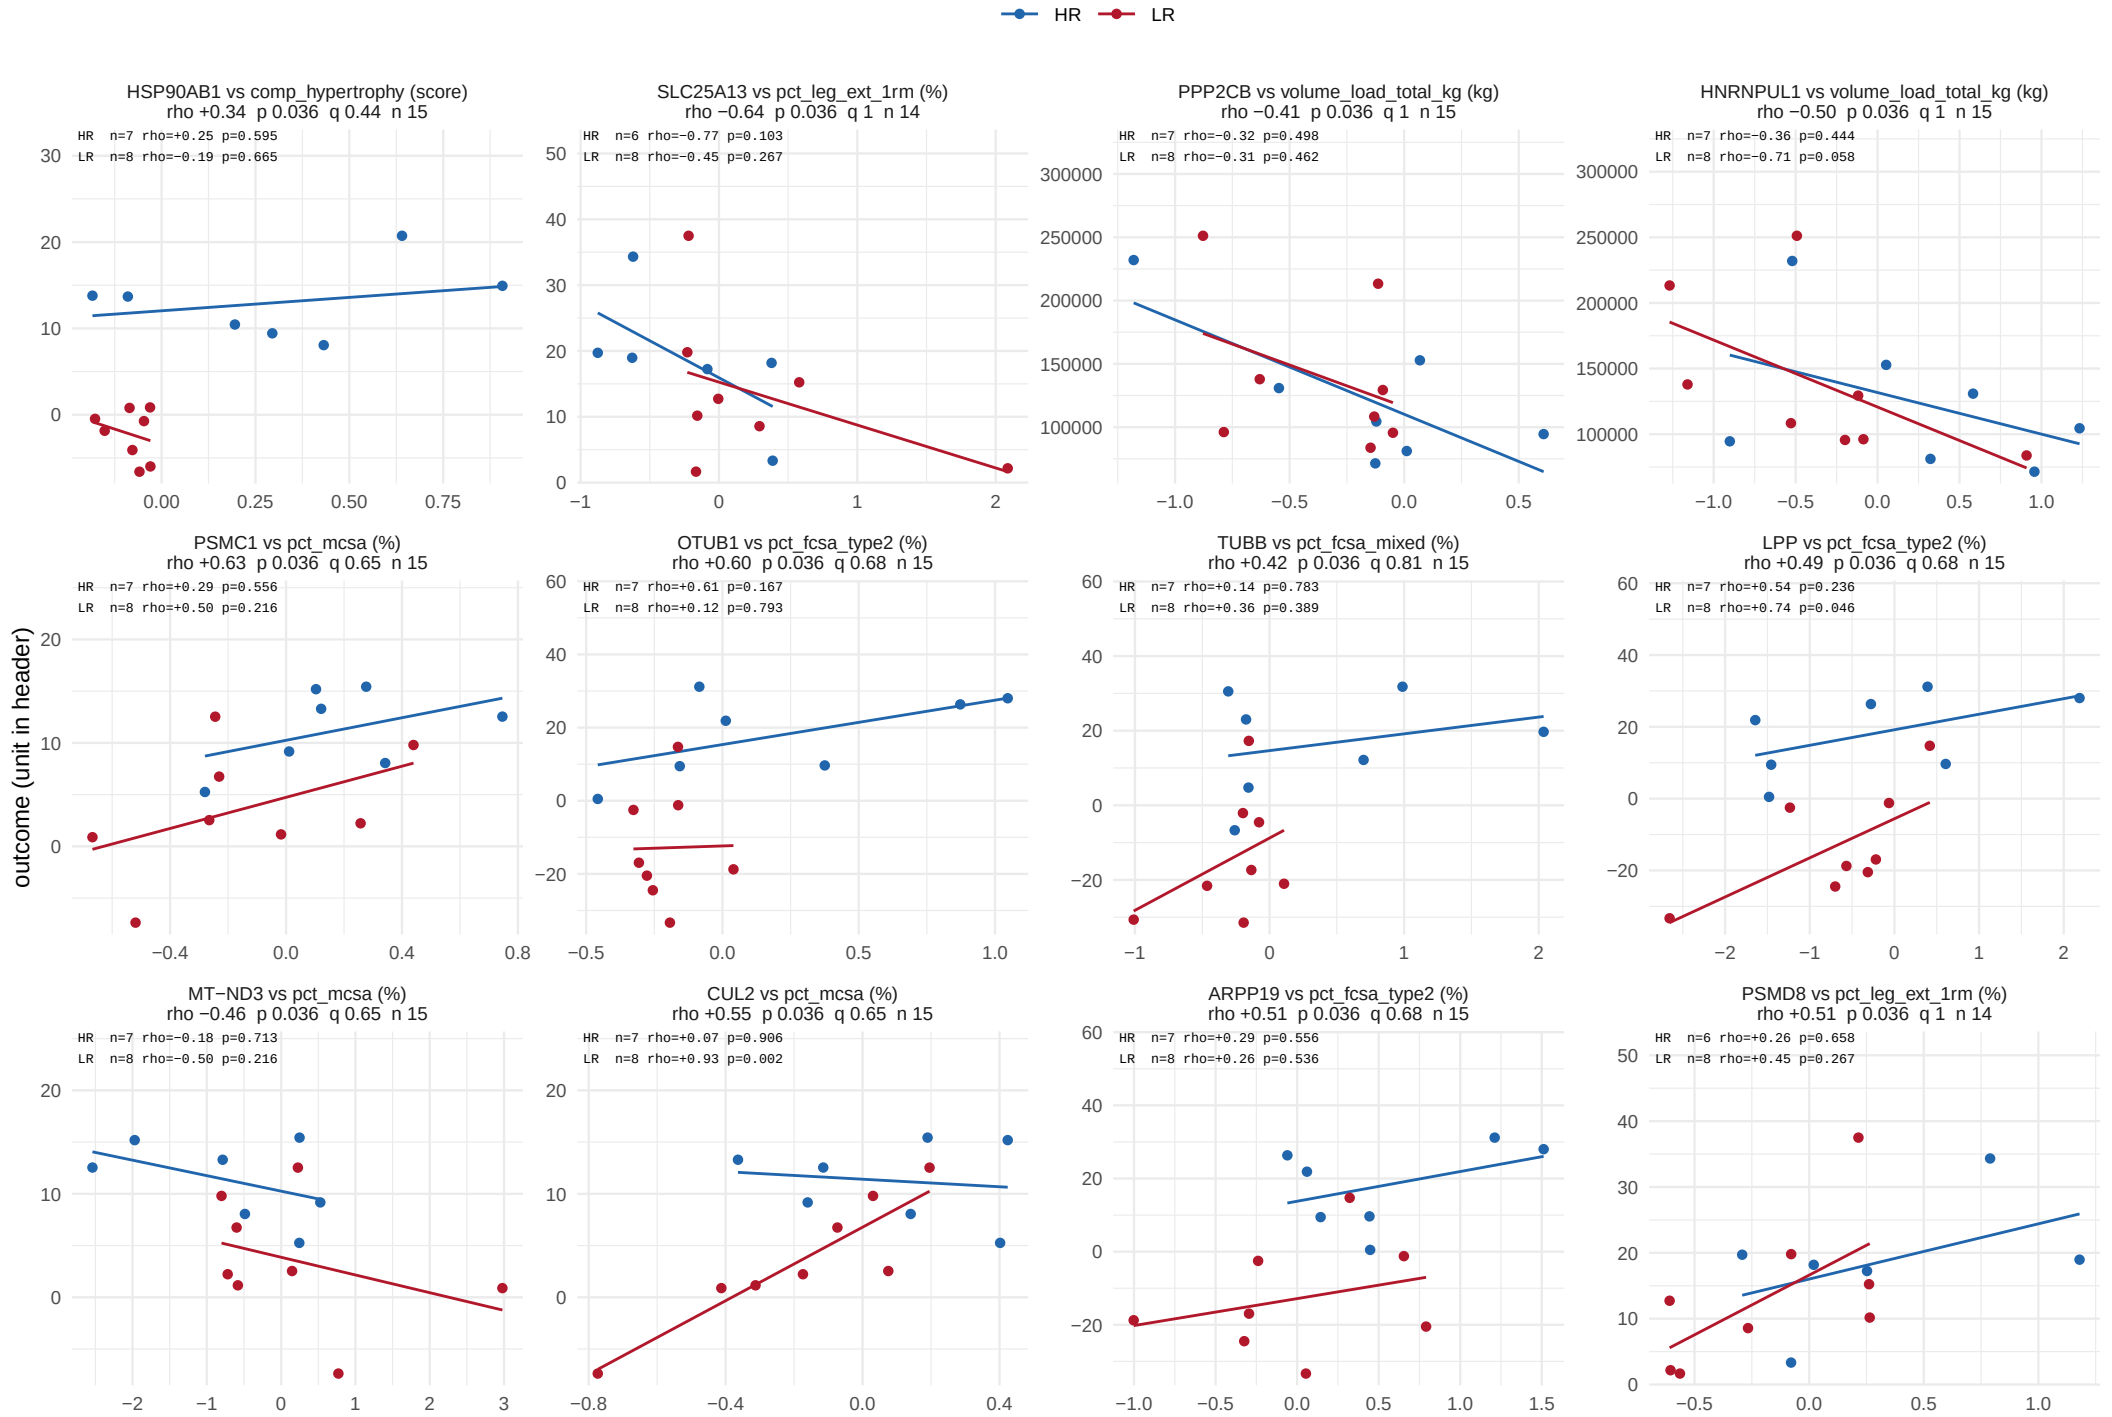

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


763 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 46 of 64.

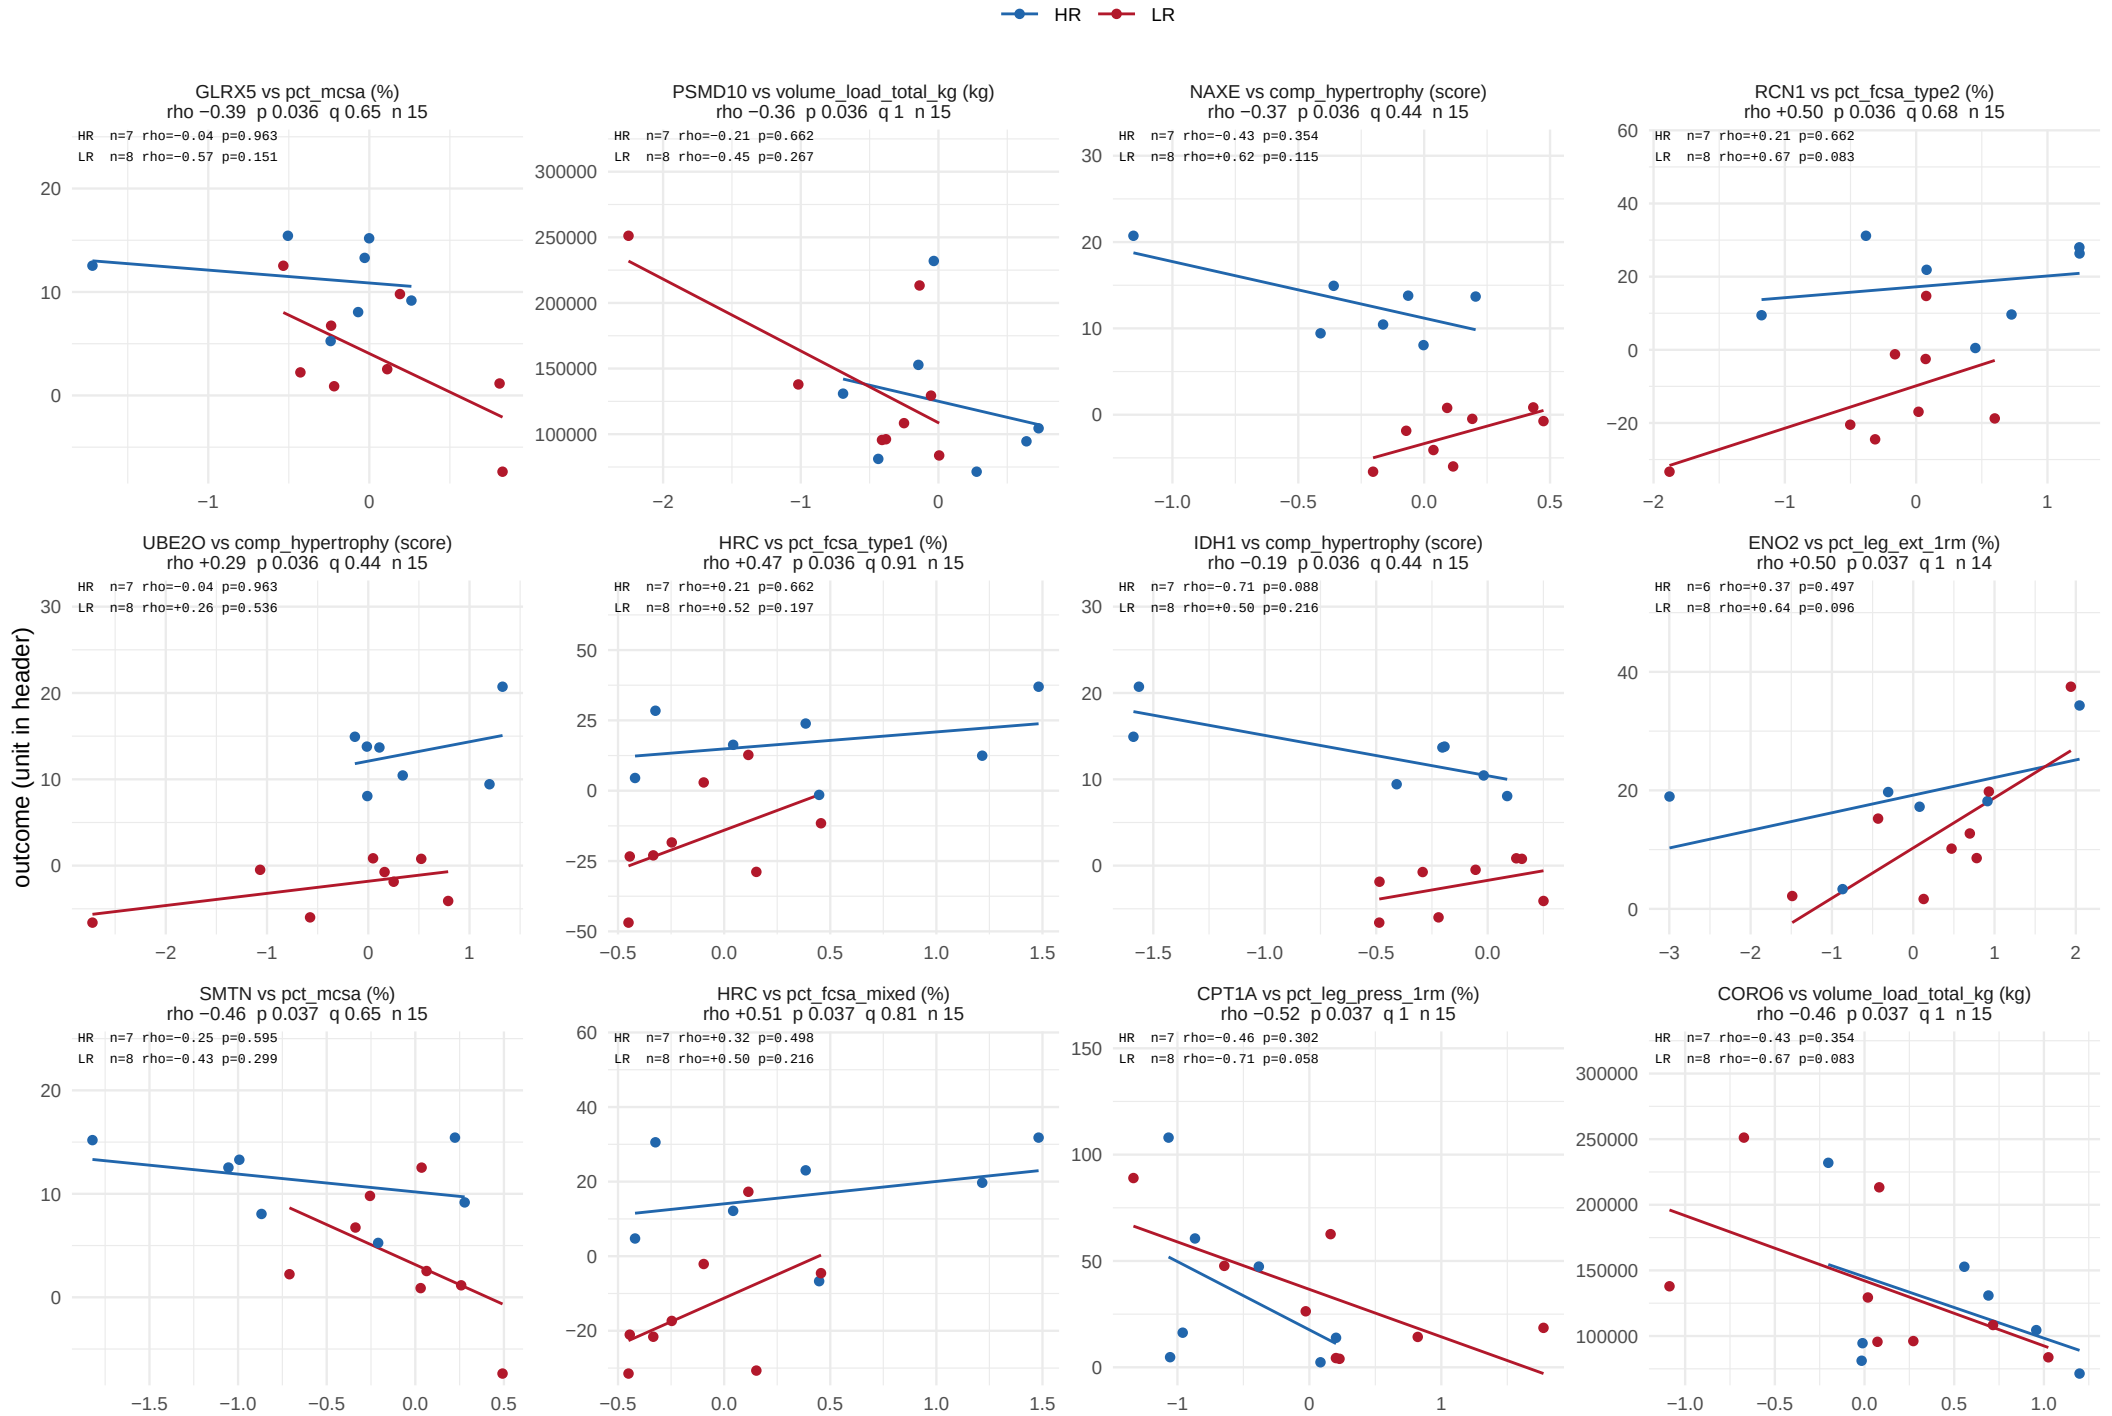

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


763 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 47 of 64.

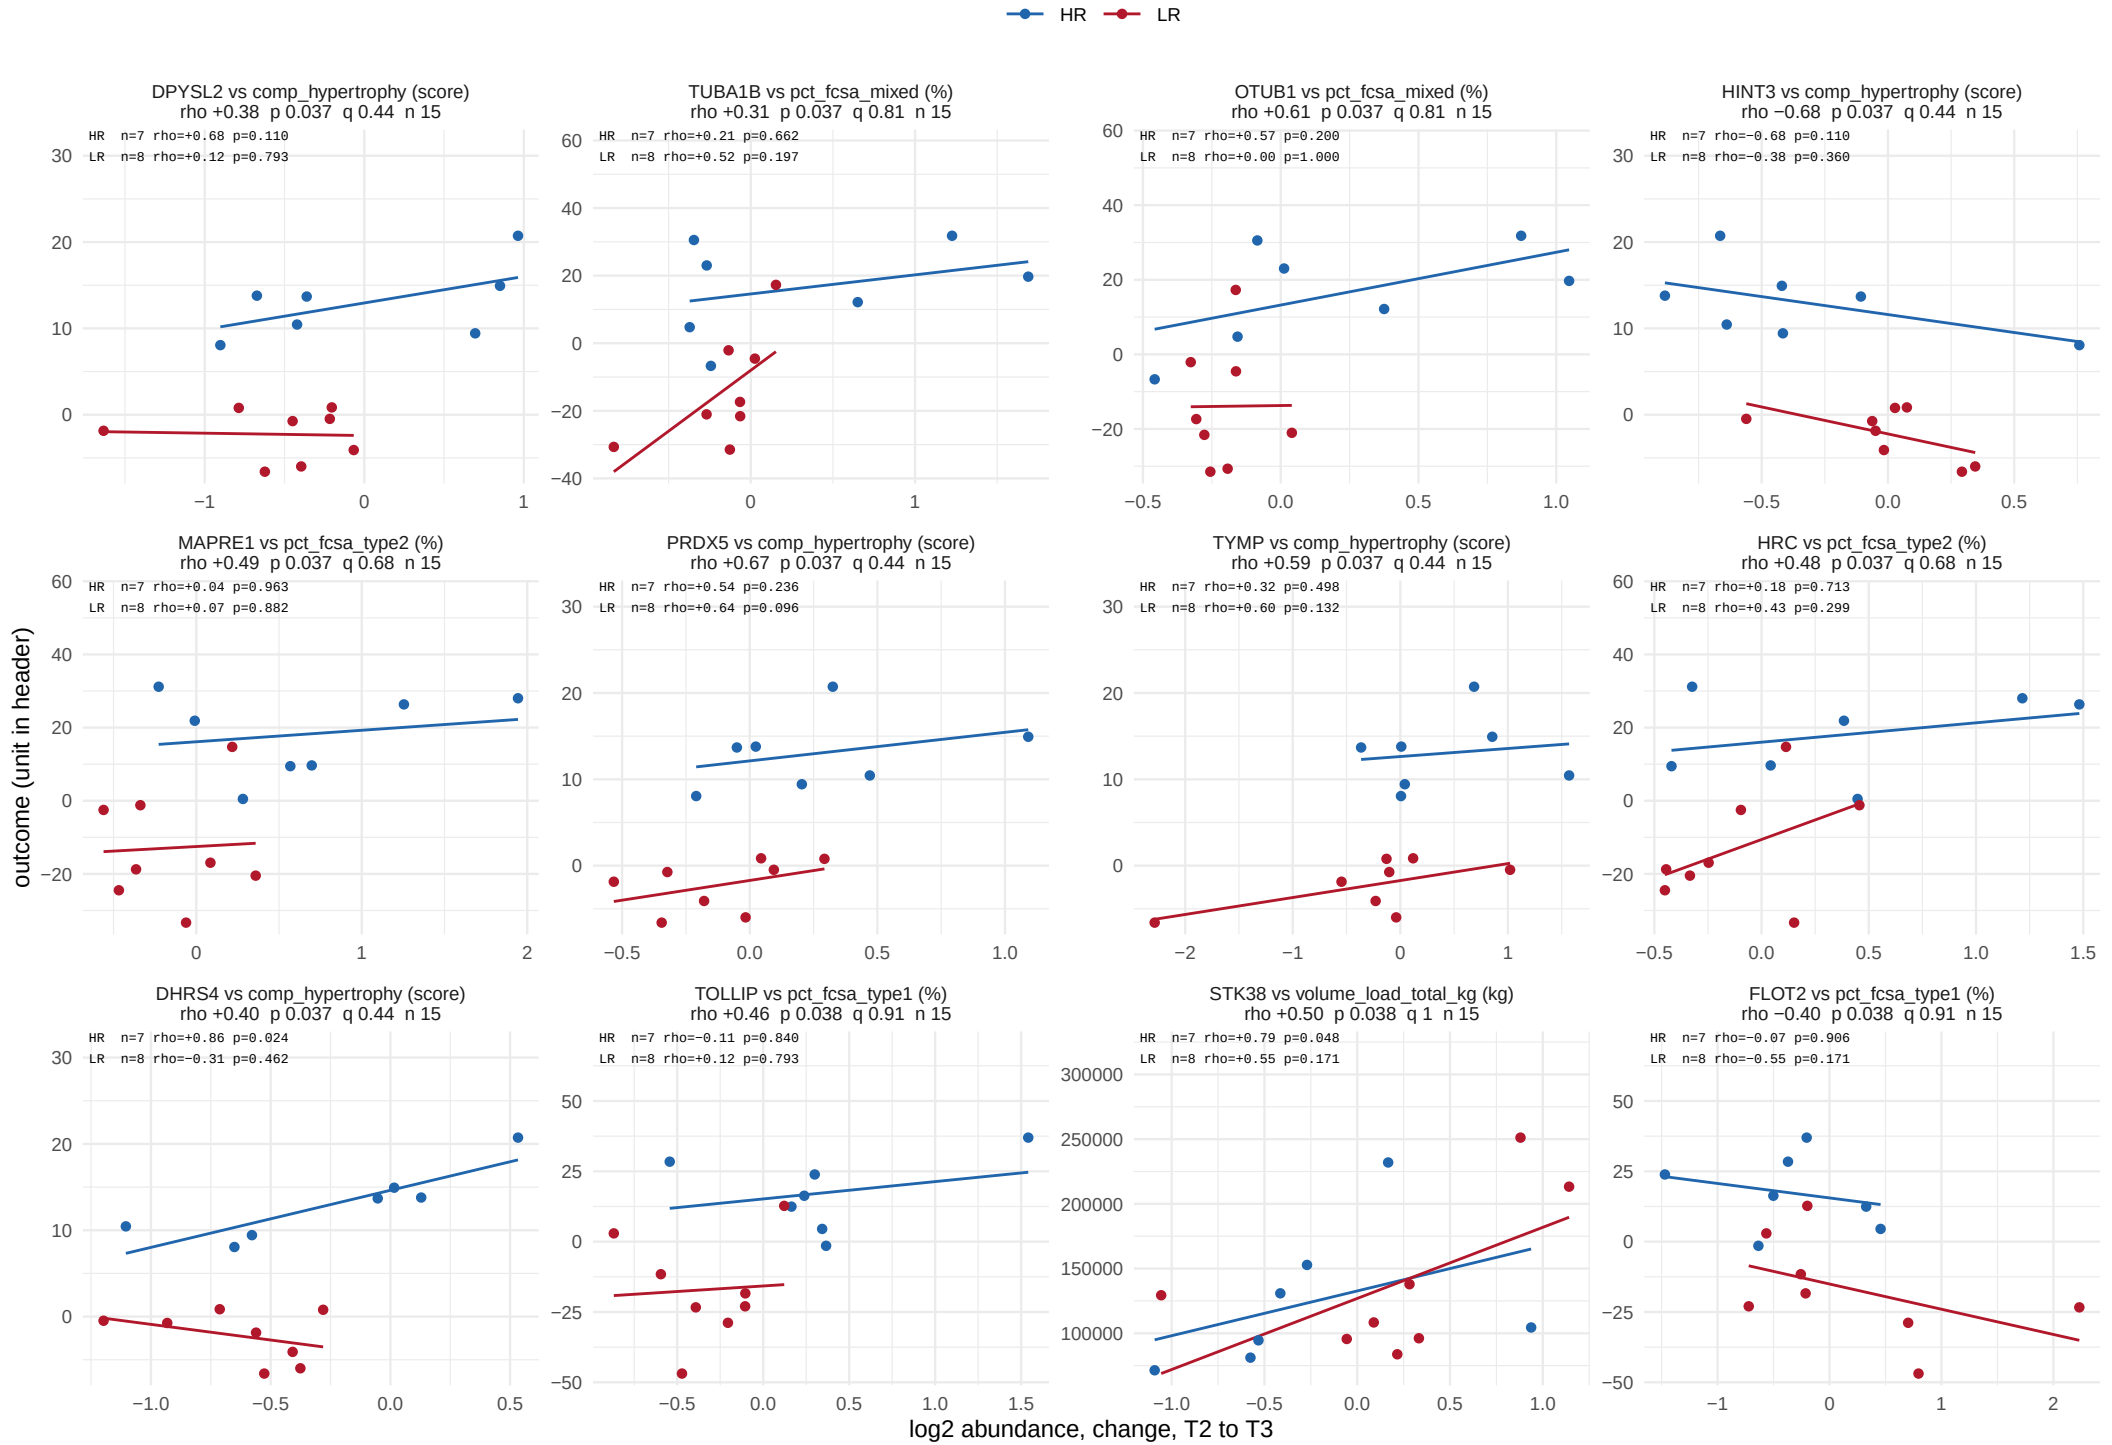

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


763 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 48 of 64.

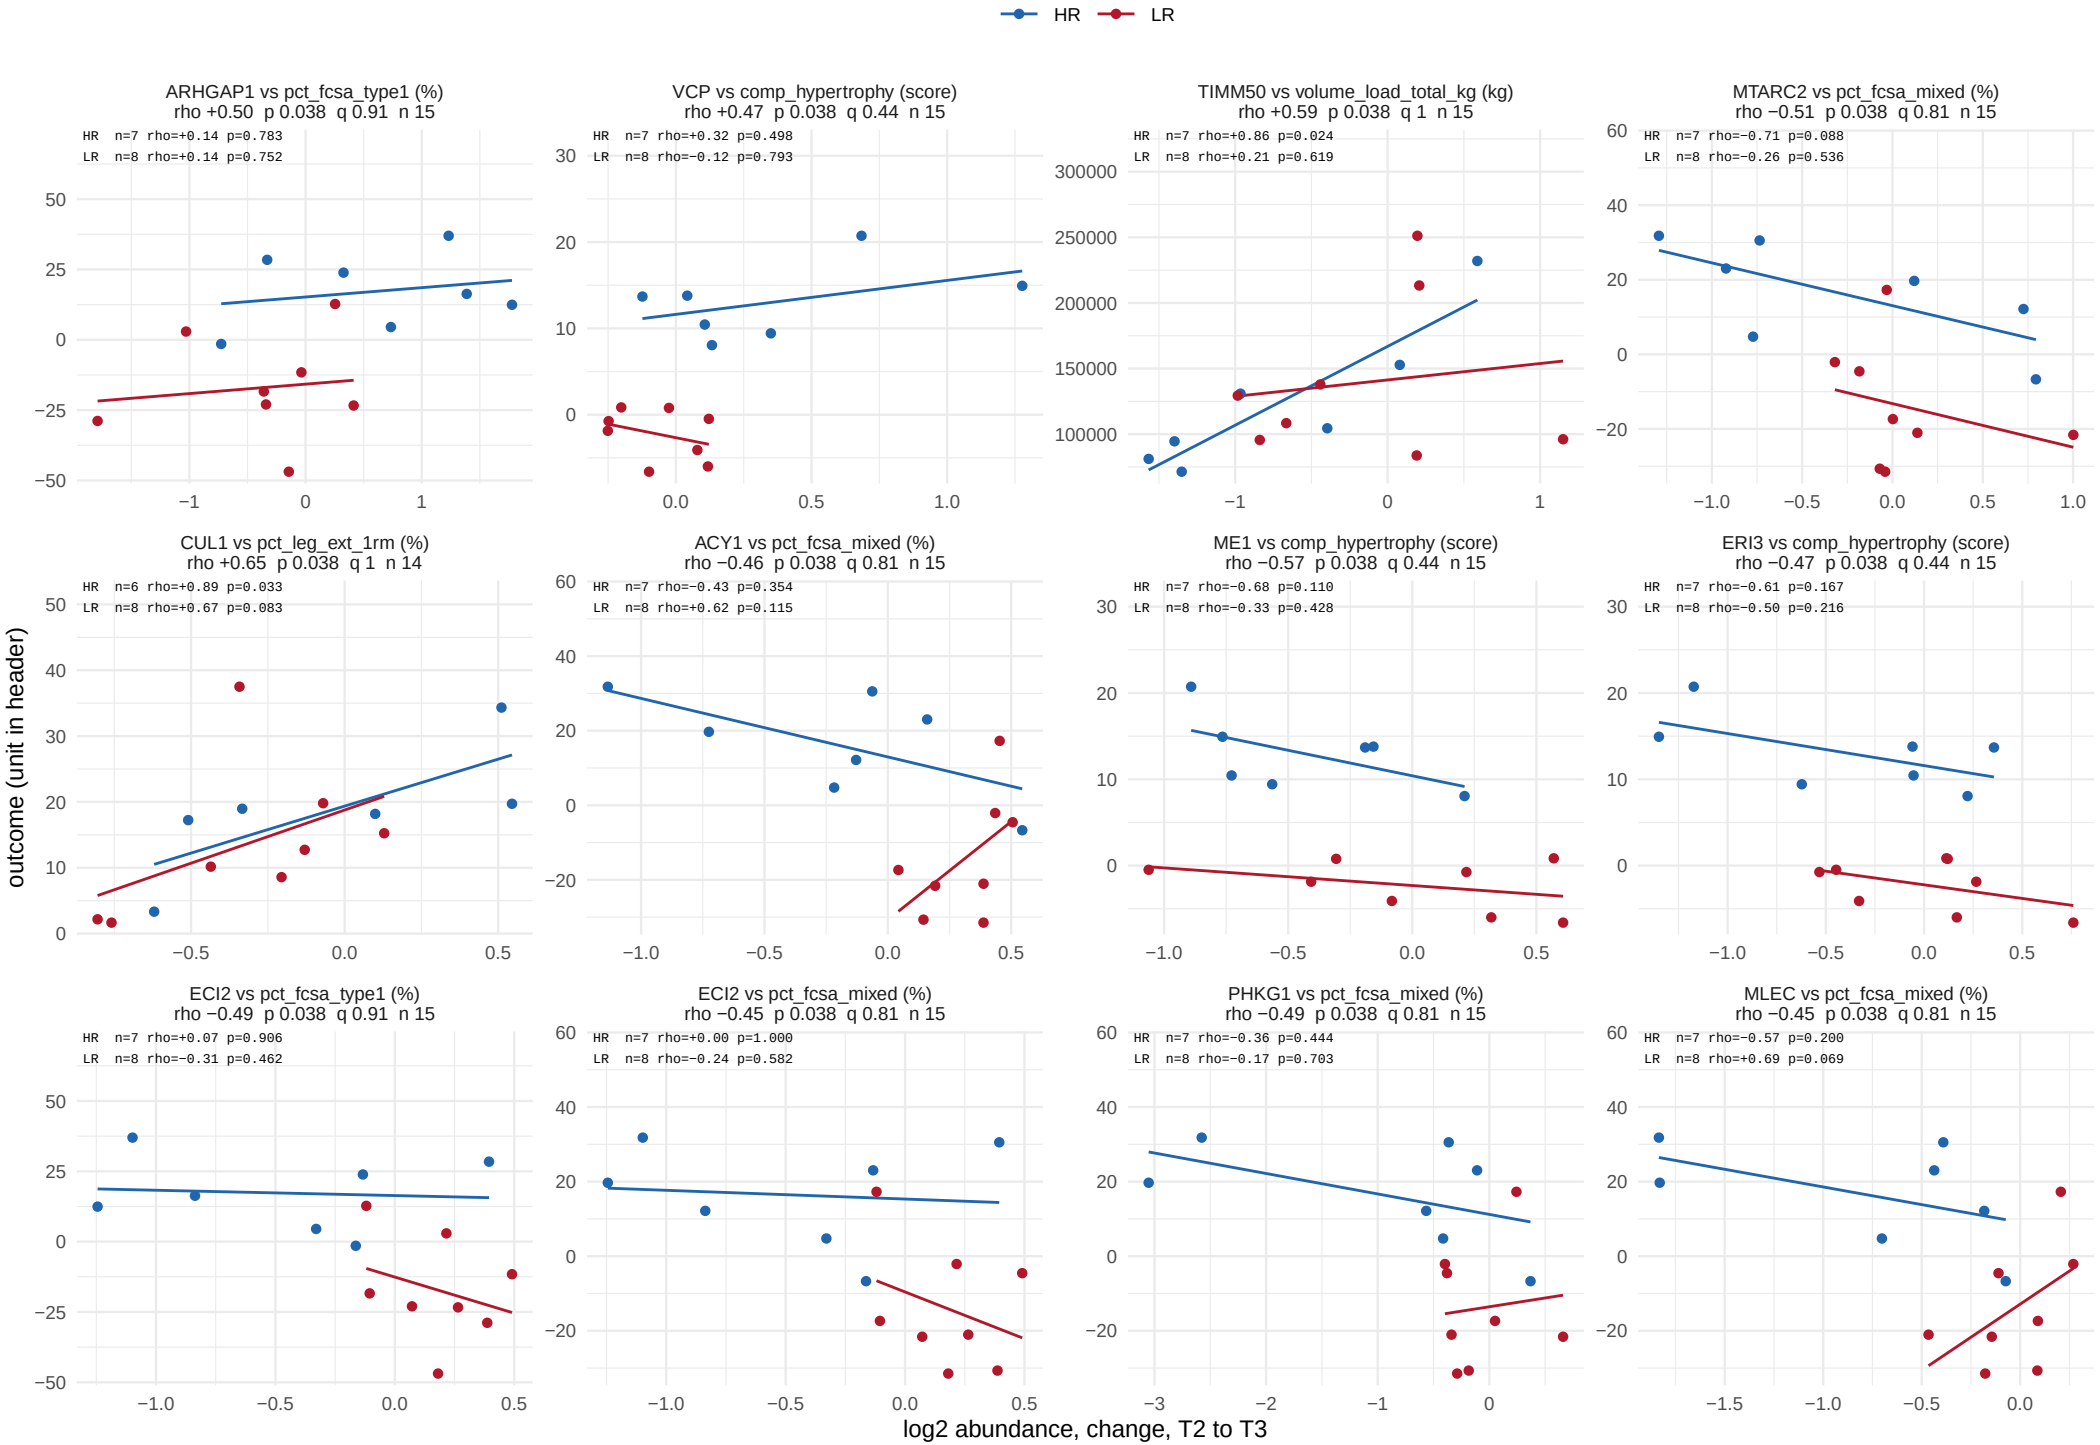

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


763 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 49 of 64.

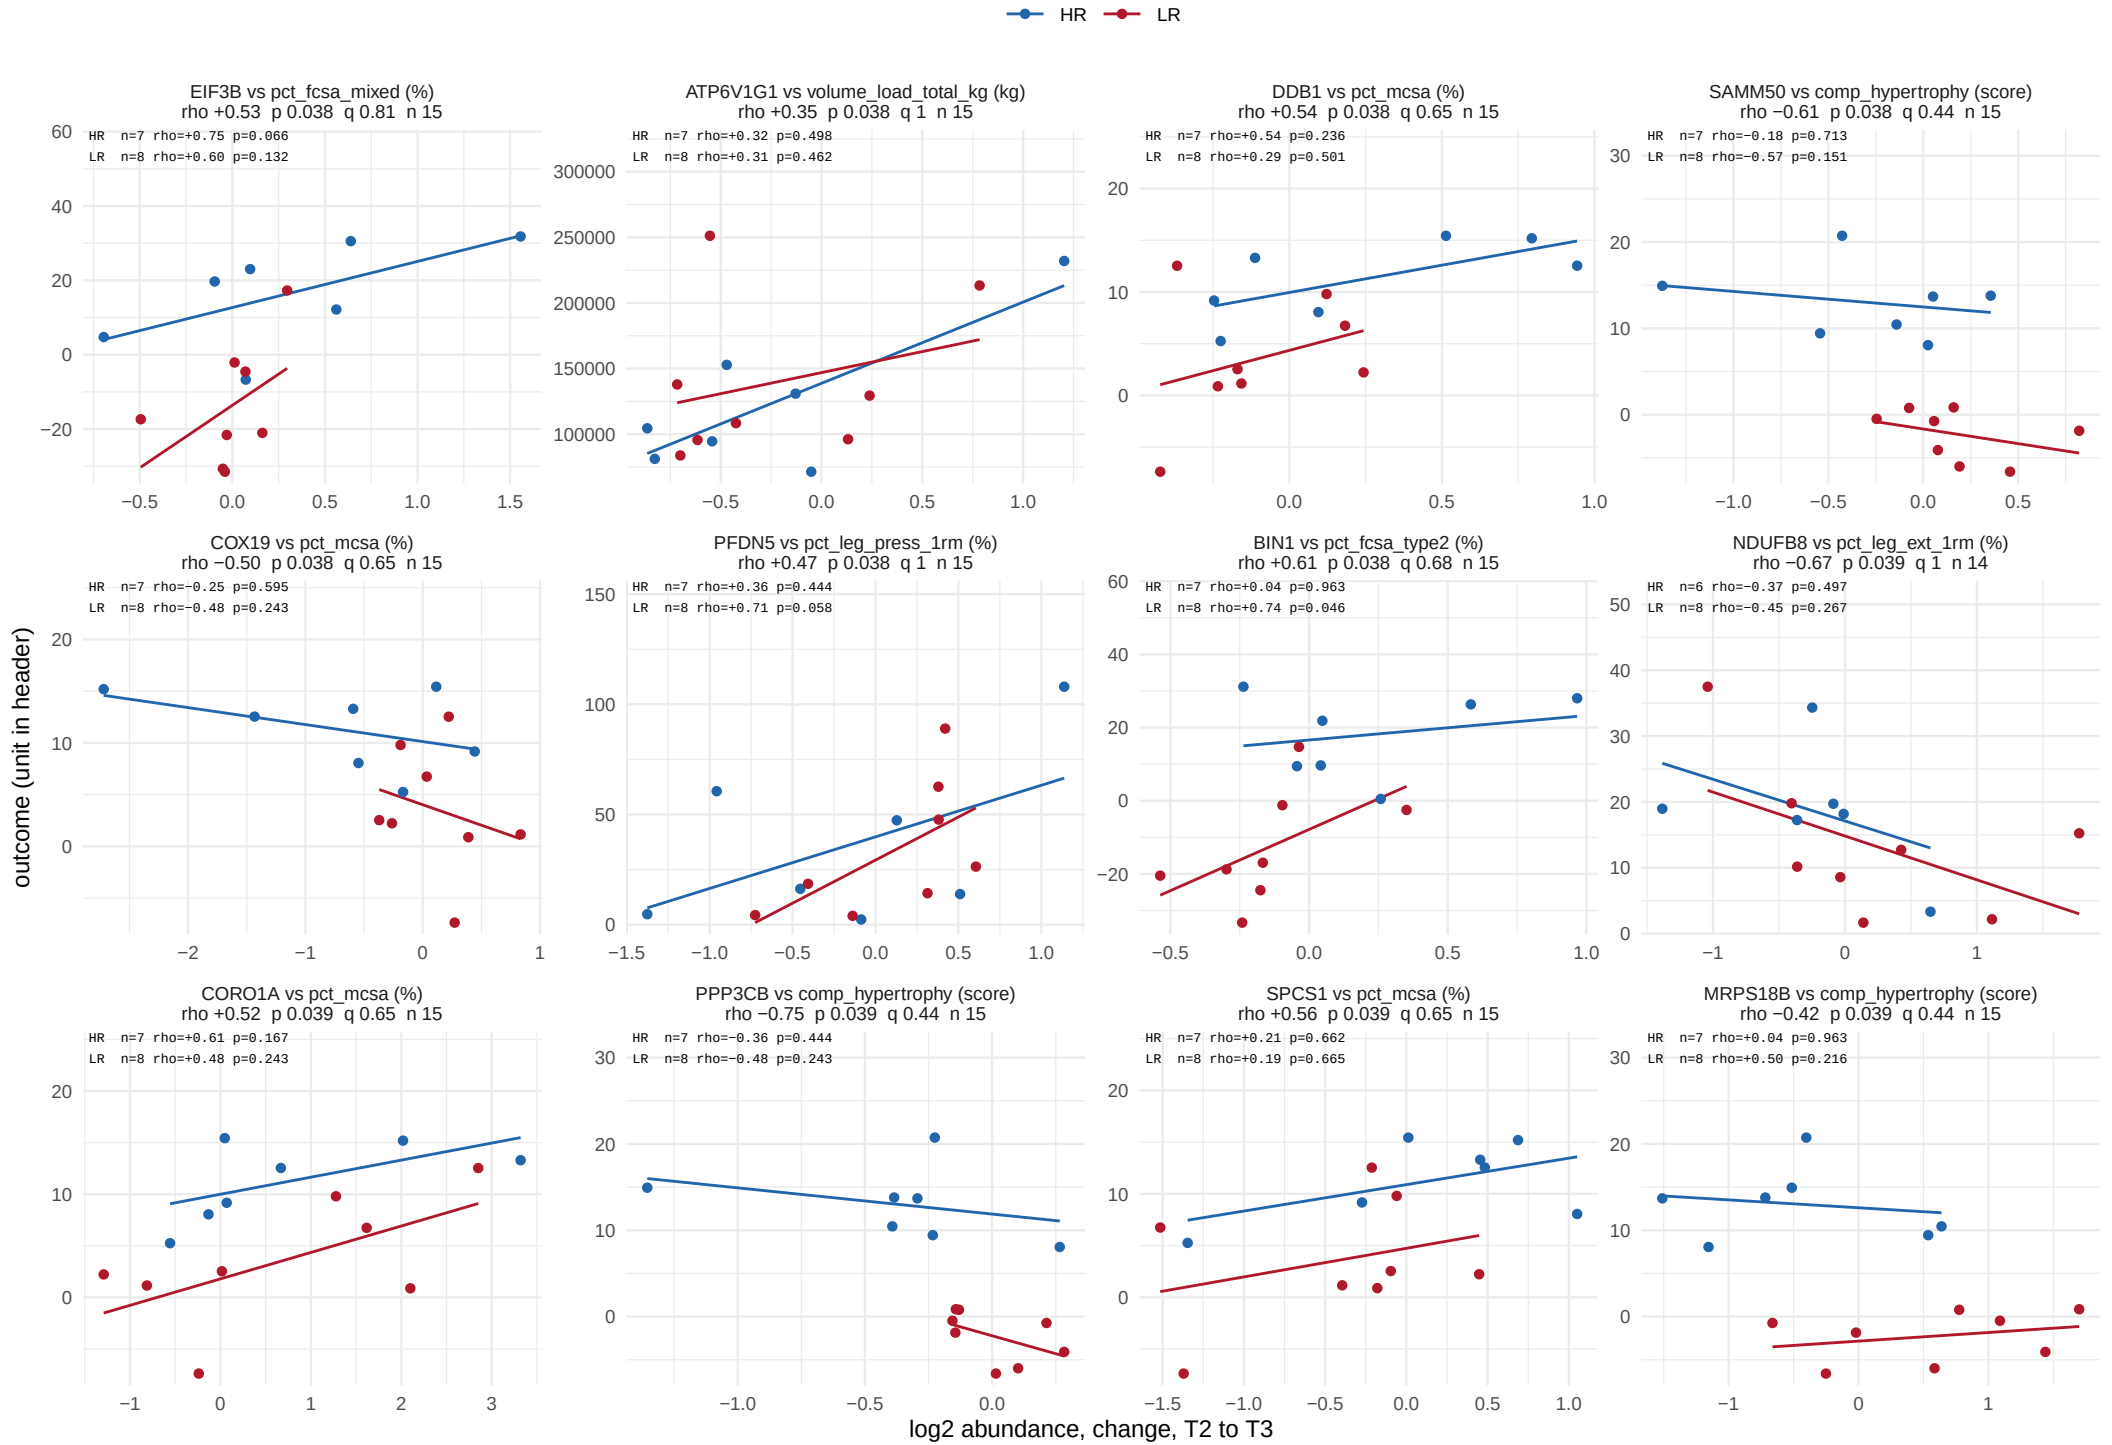

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


763 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 50 of 64.

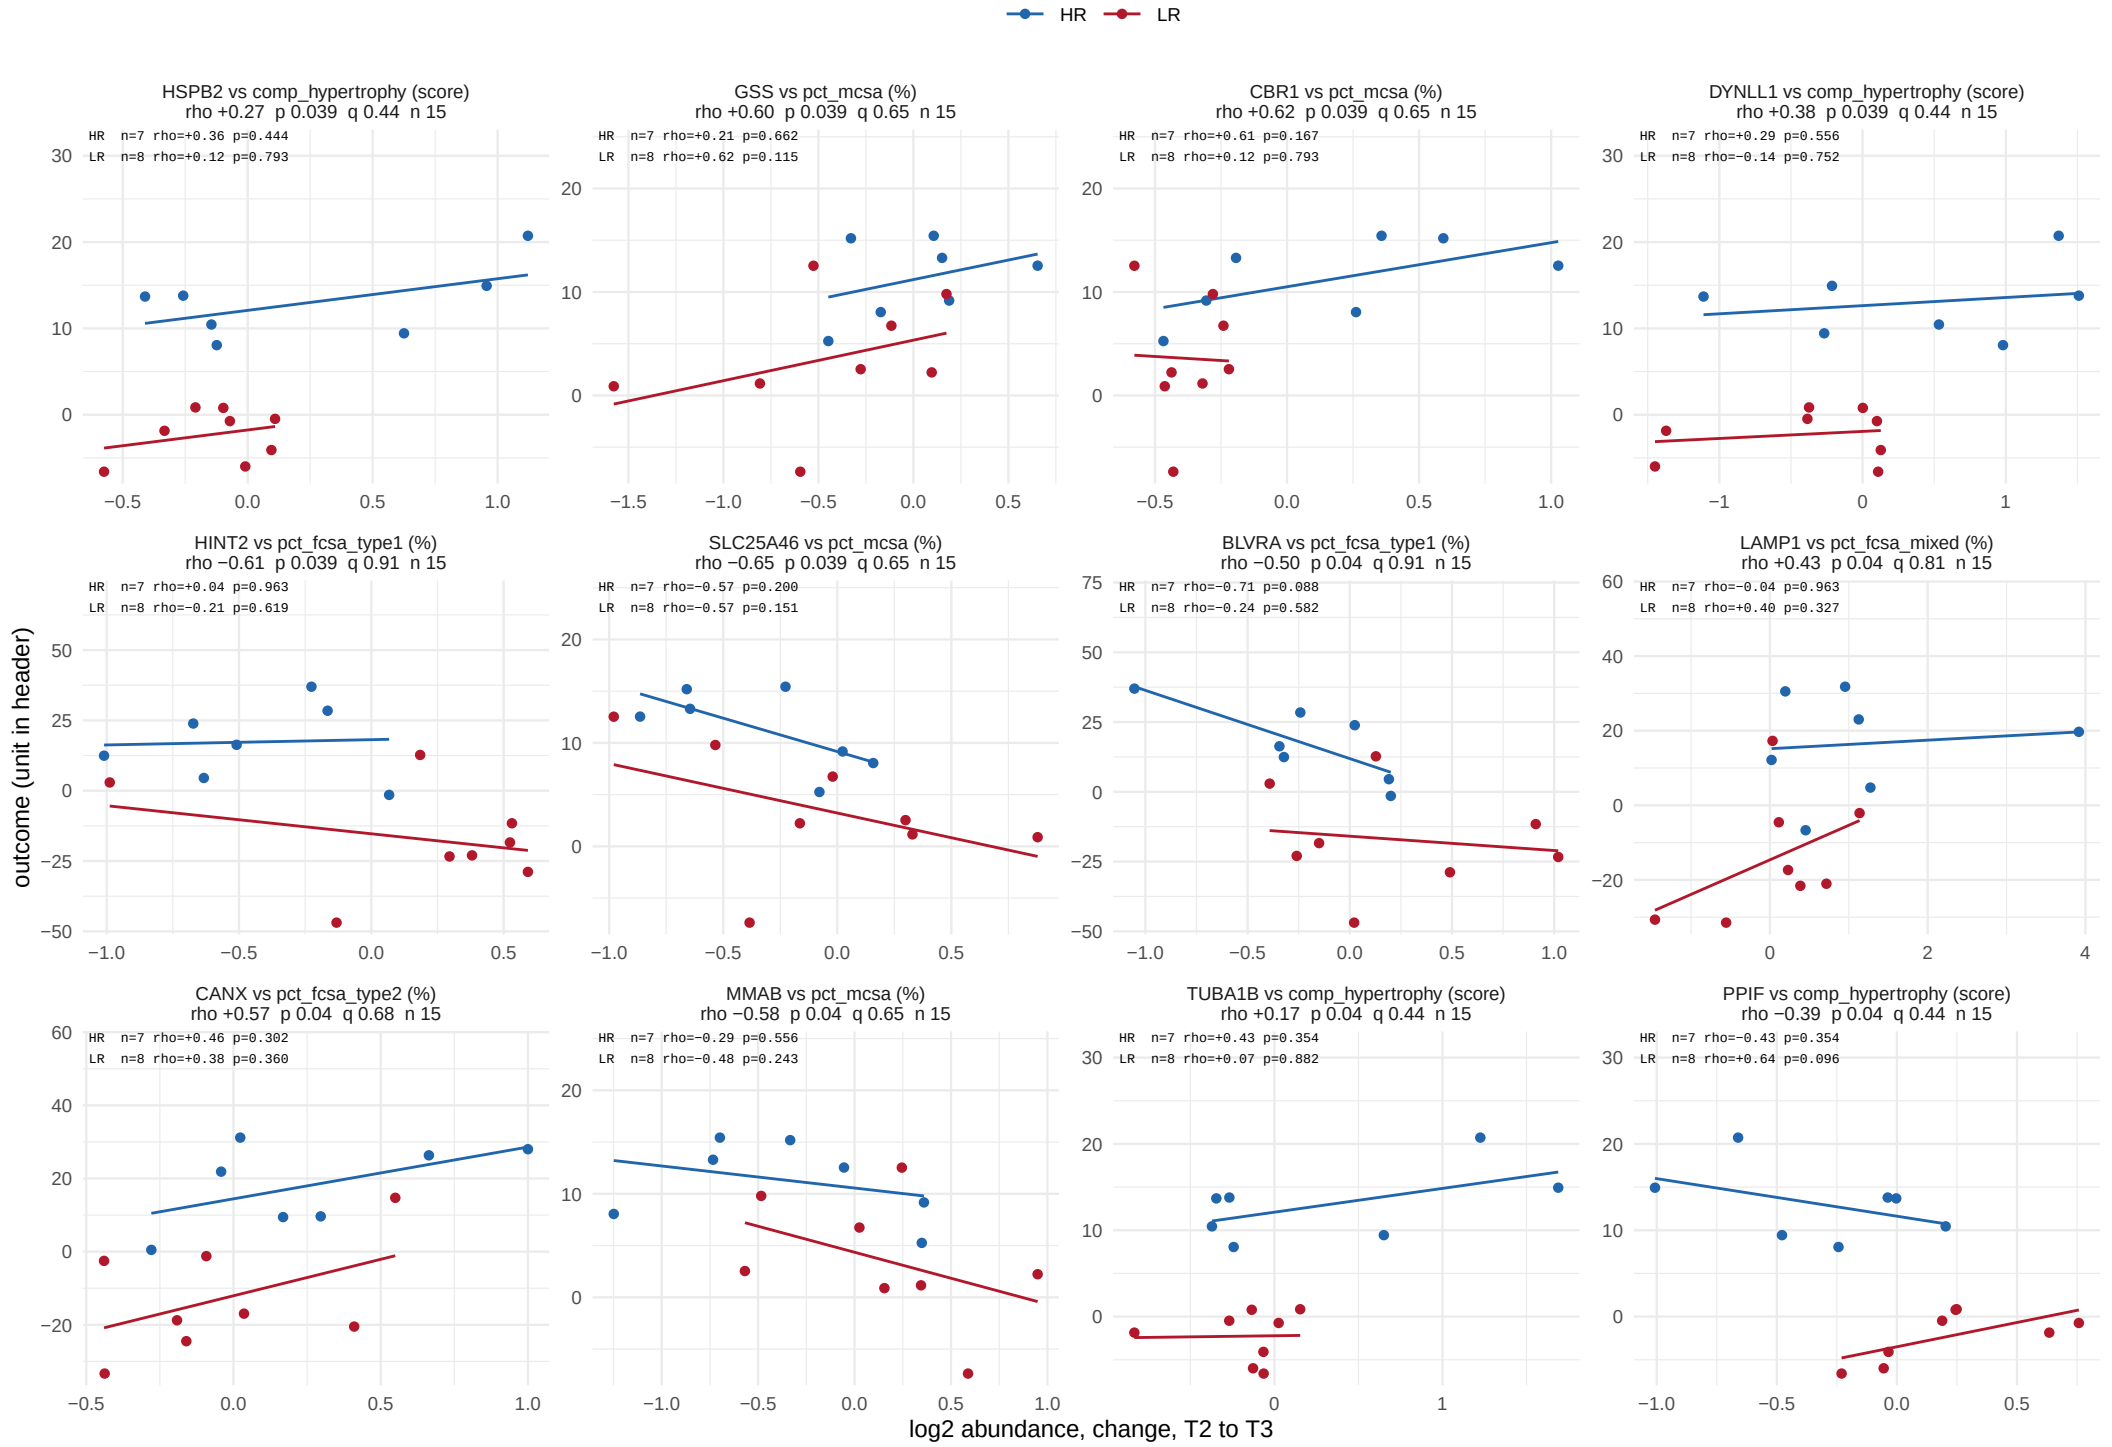

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


763 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 51 of 64.

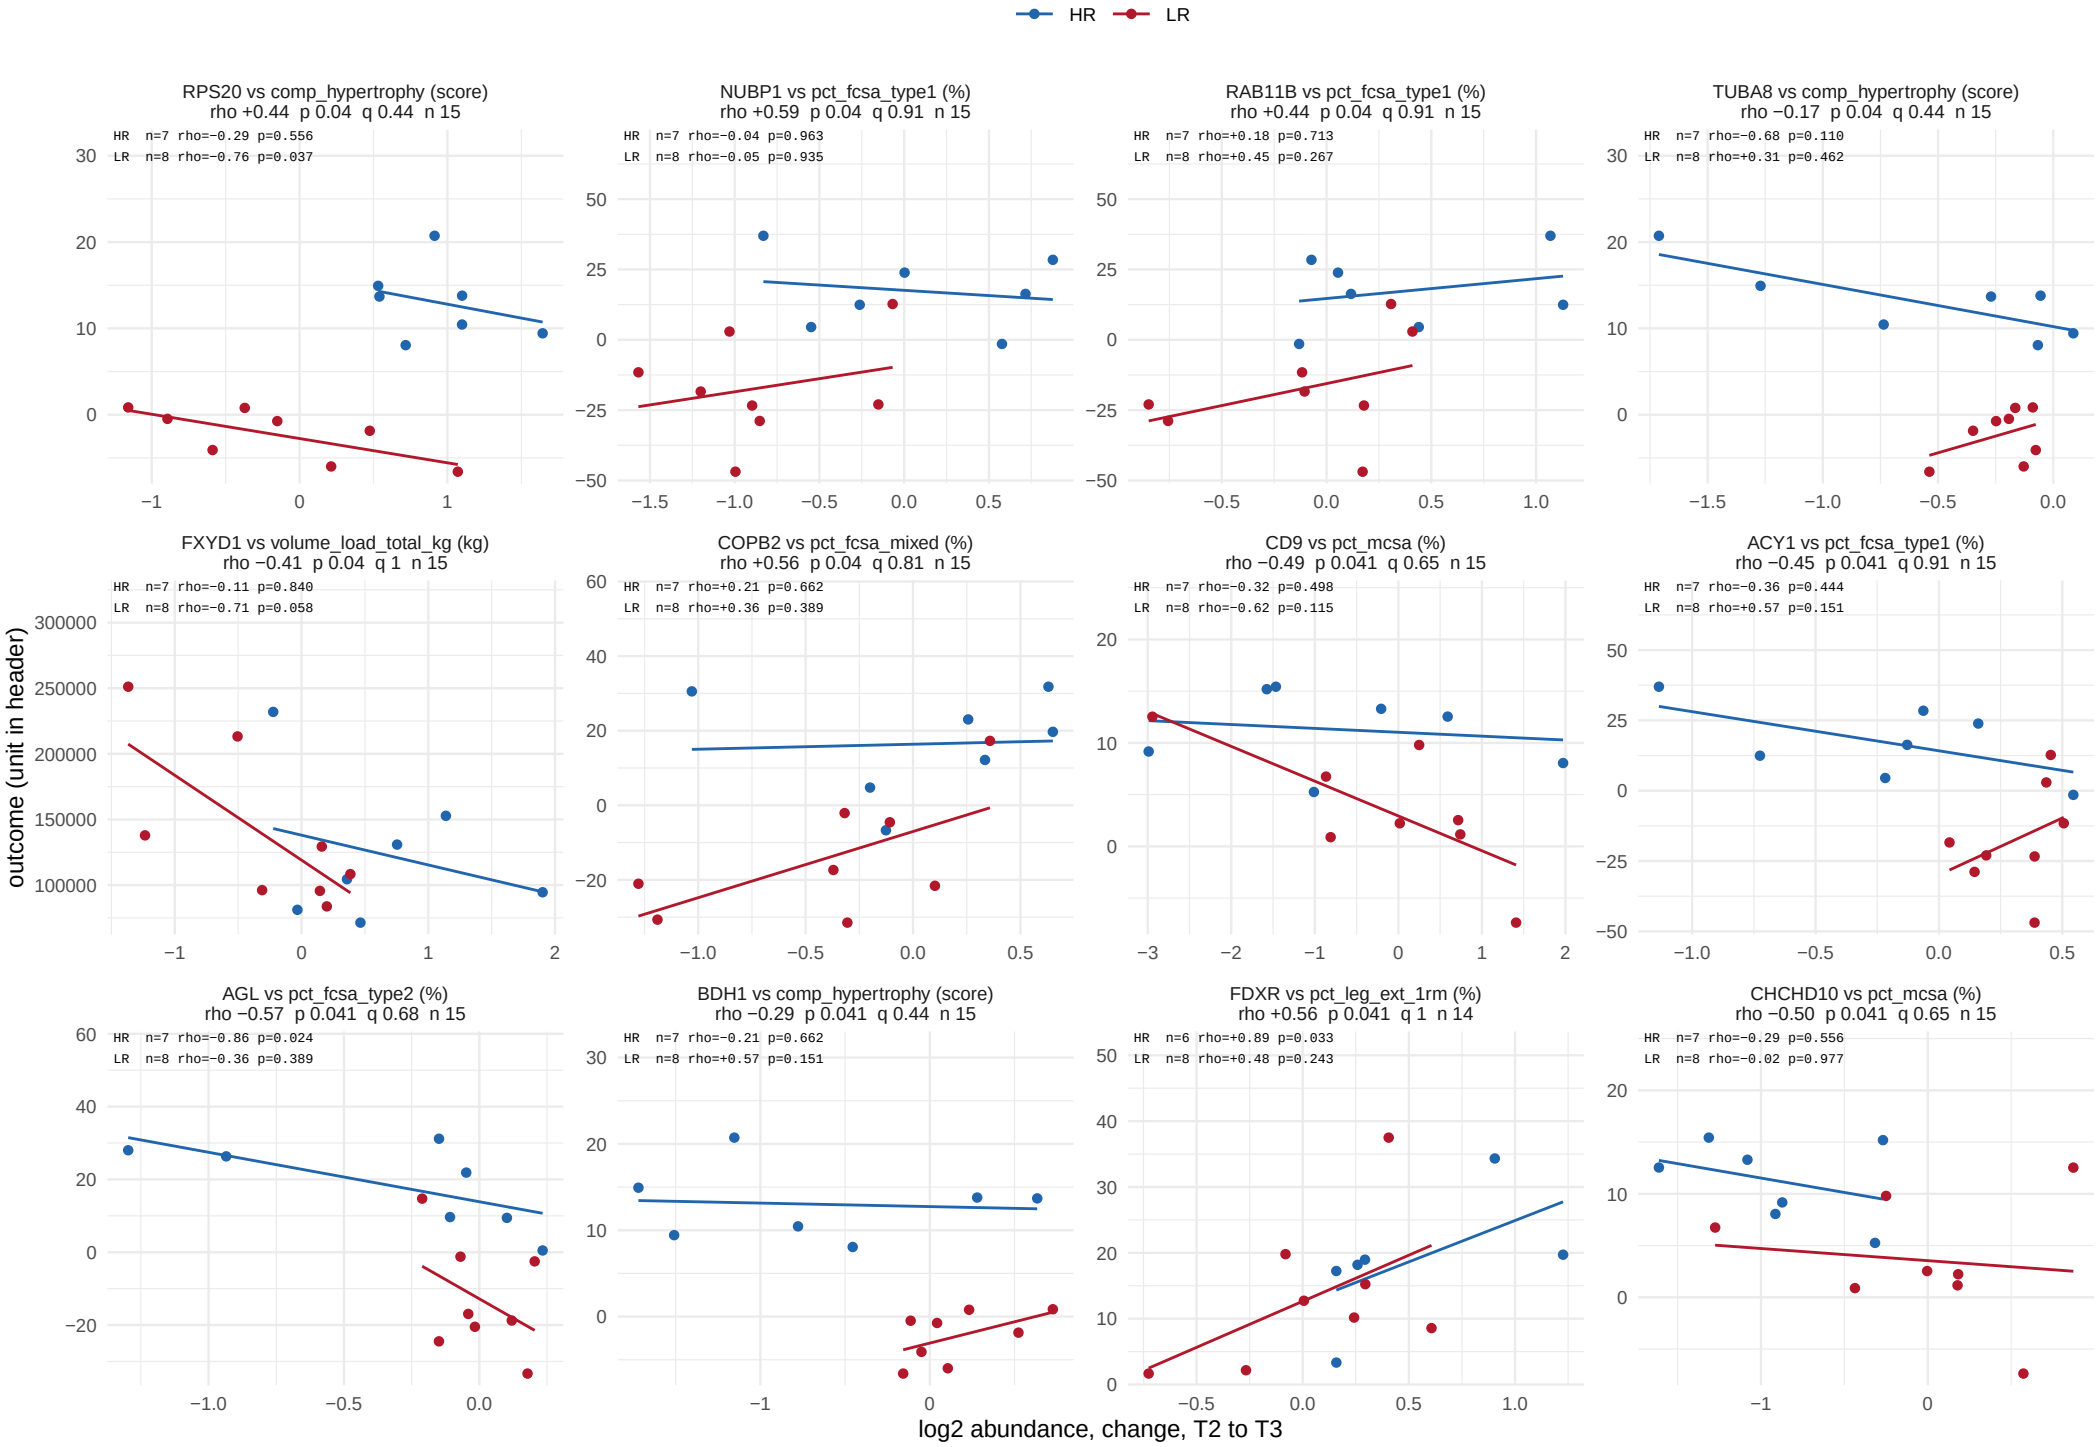

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


763 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 52 of 64.

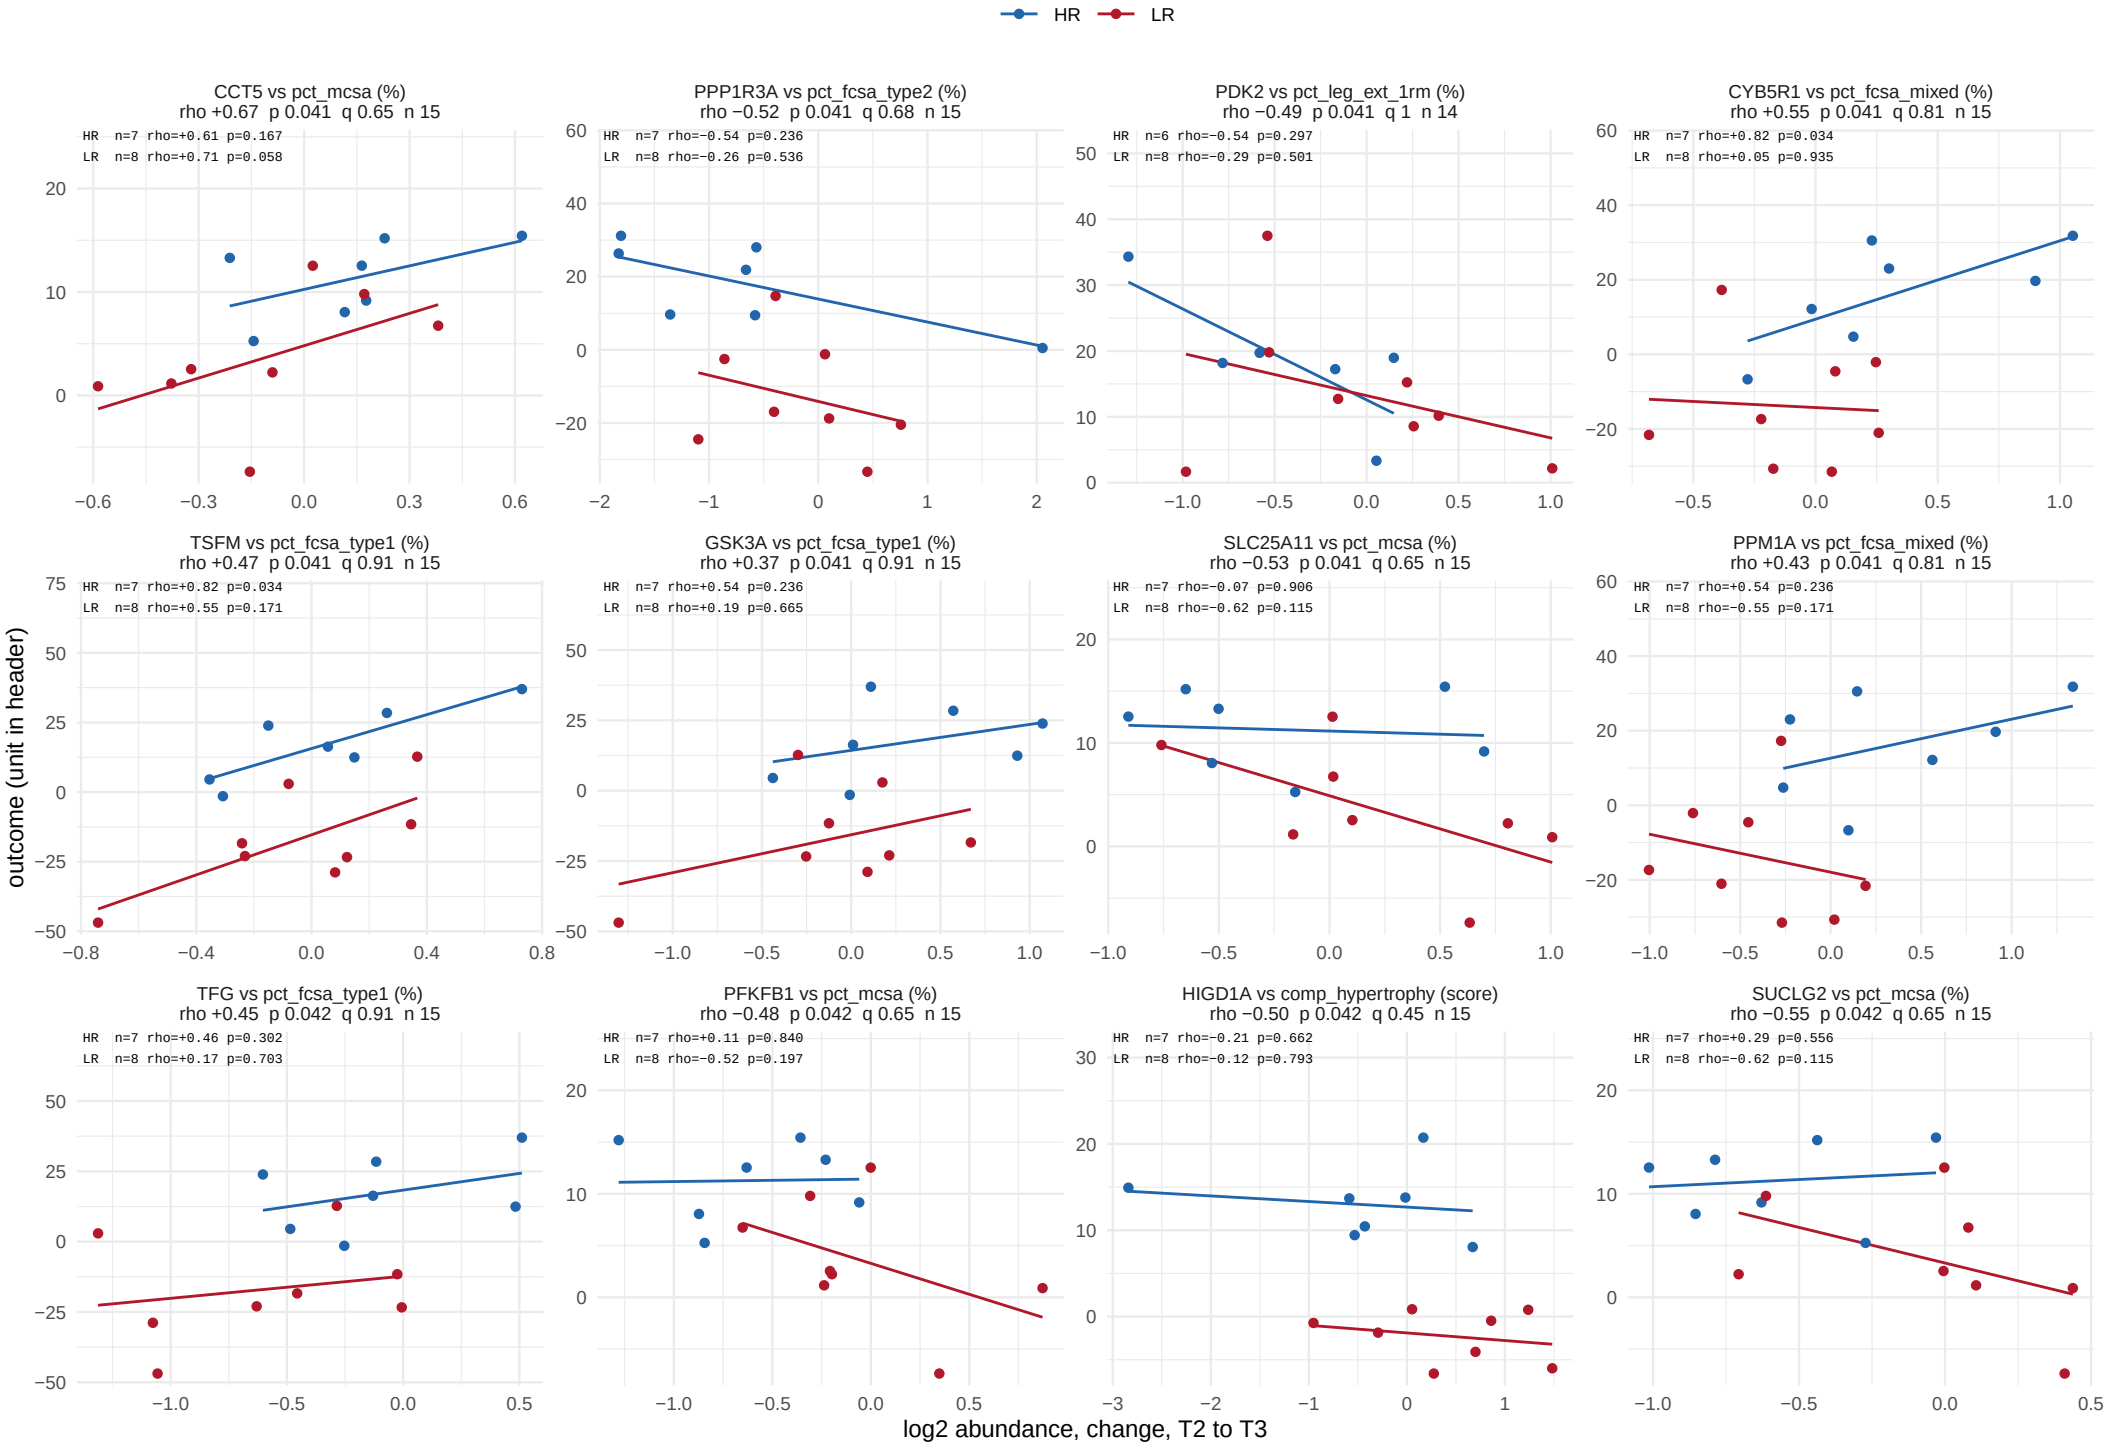

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


763 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 53 of 64.

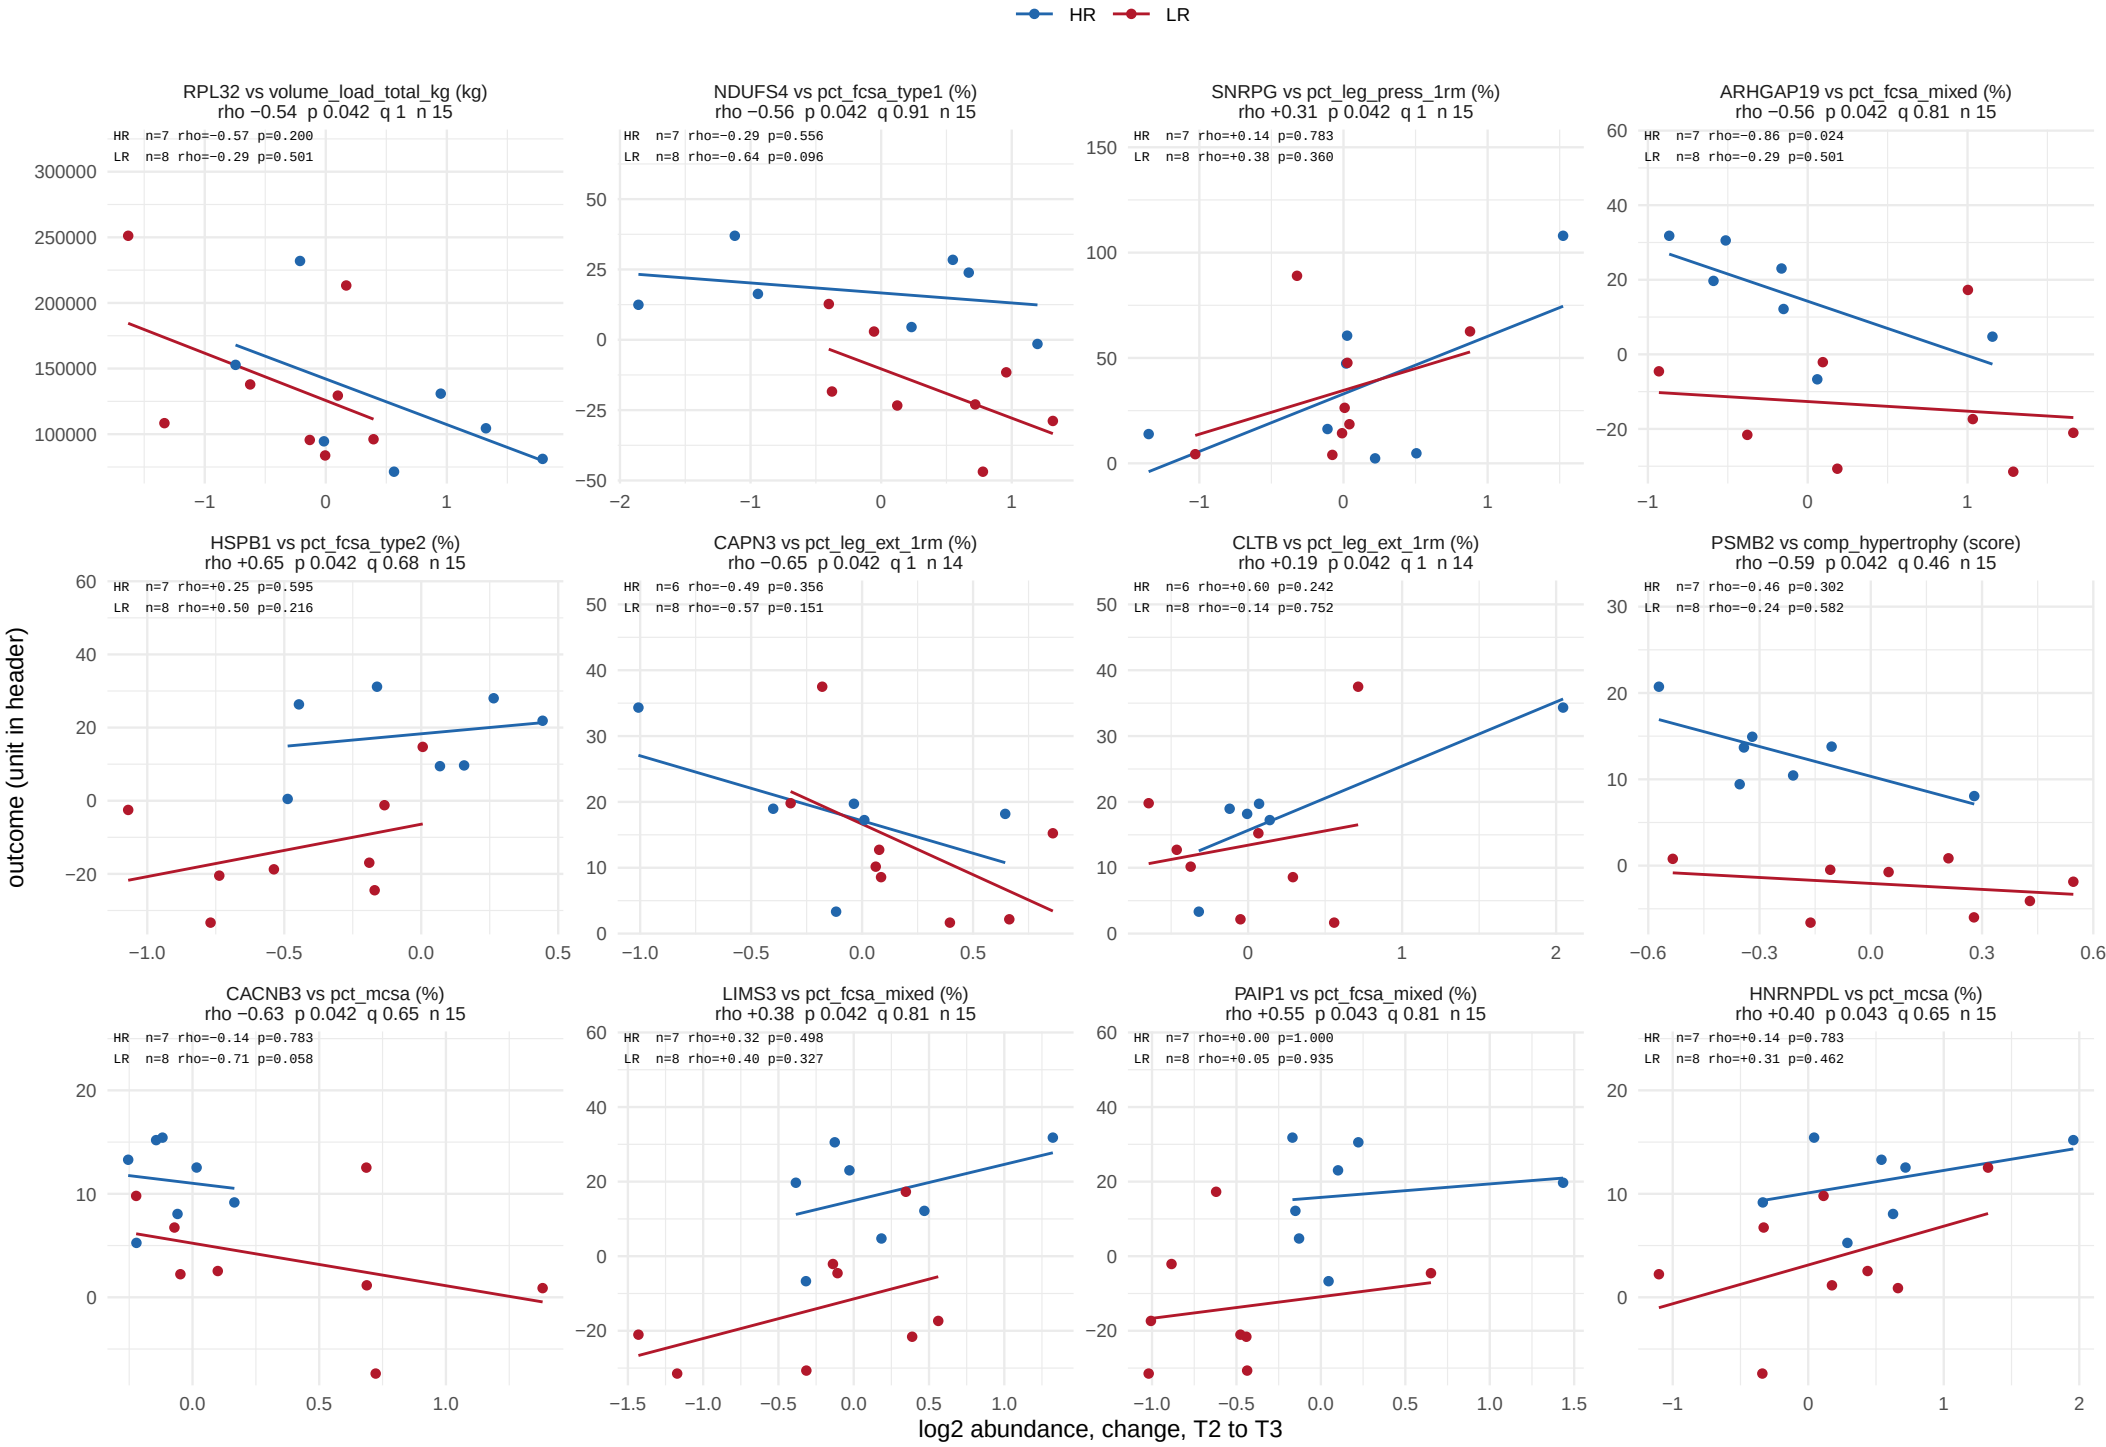

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


763 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 54 of 64.

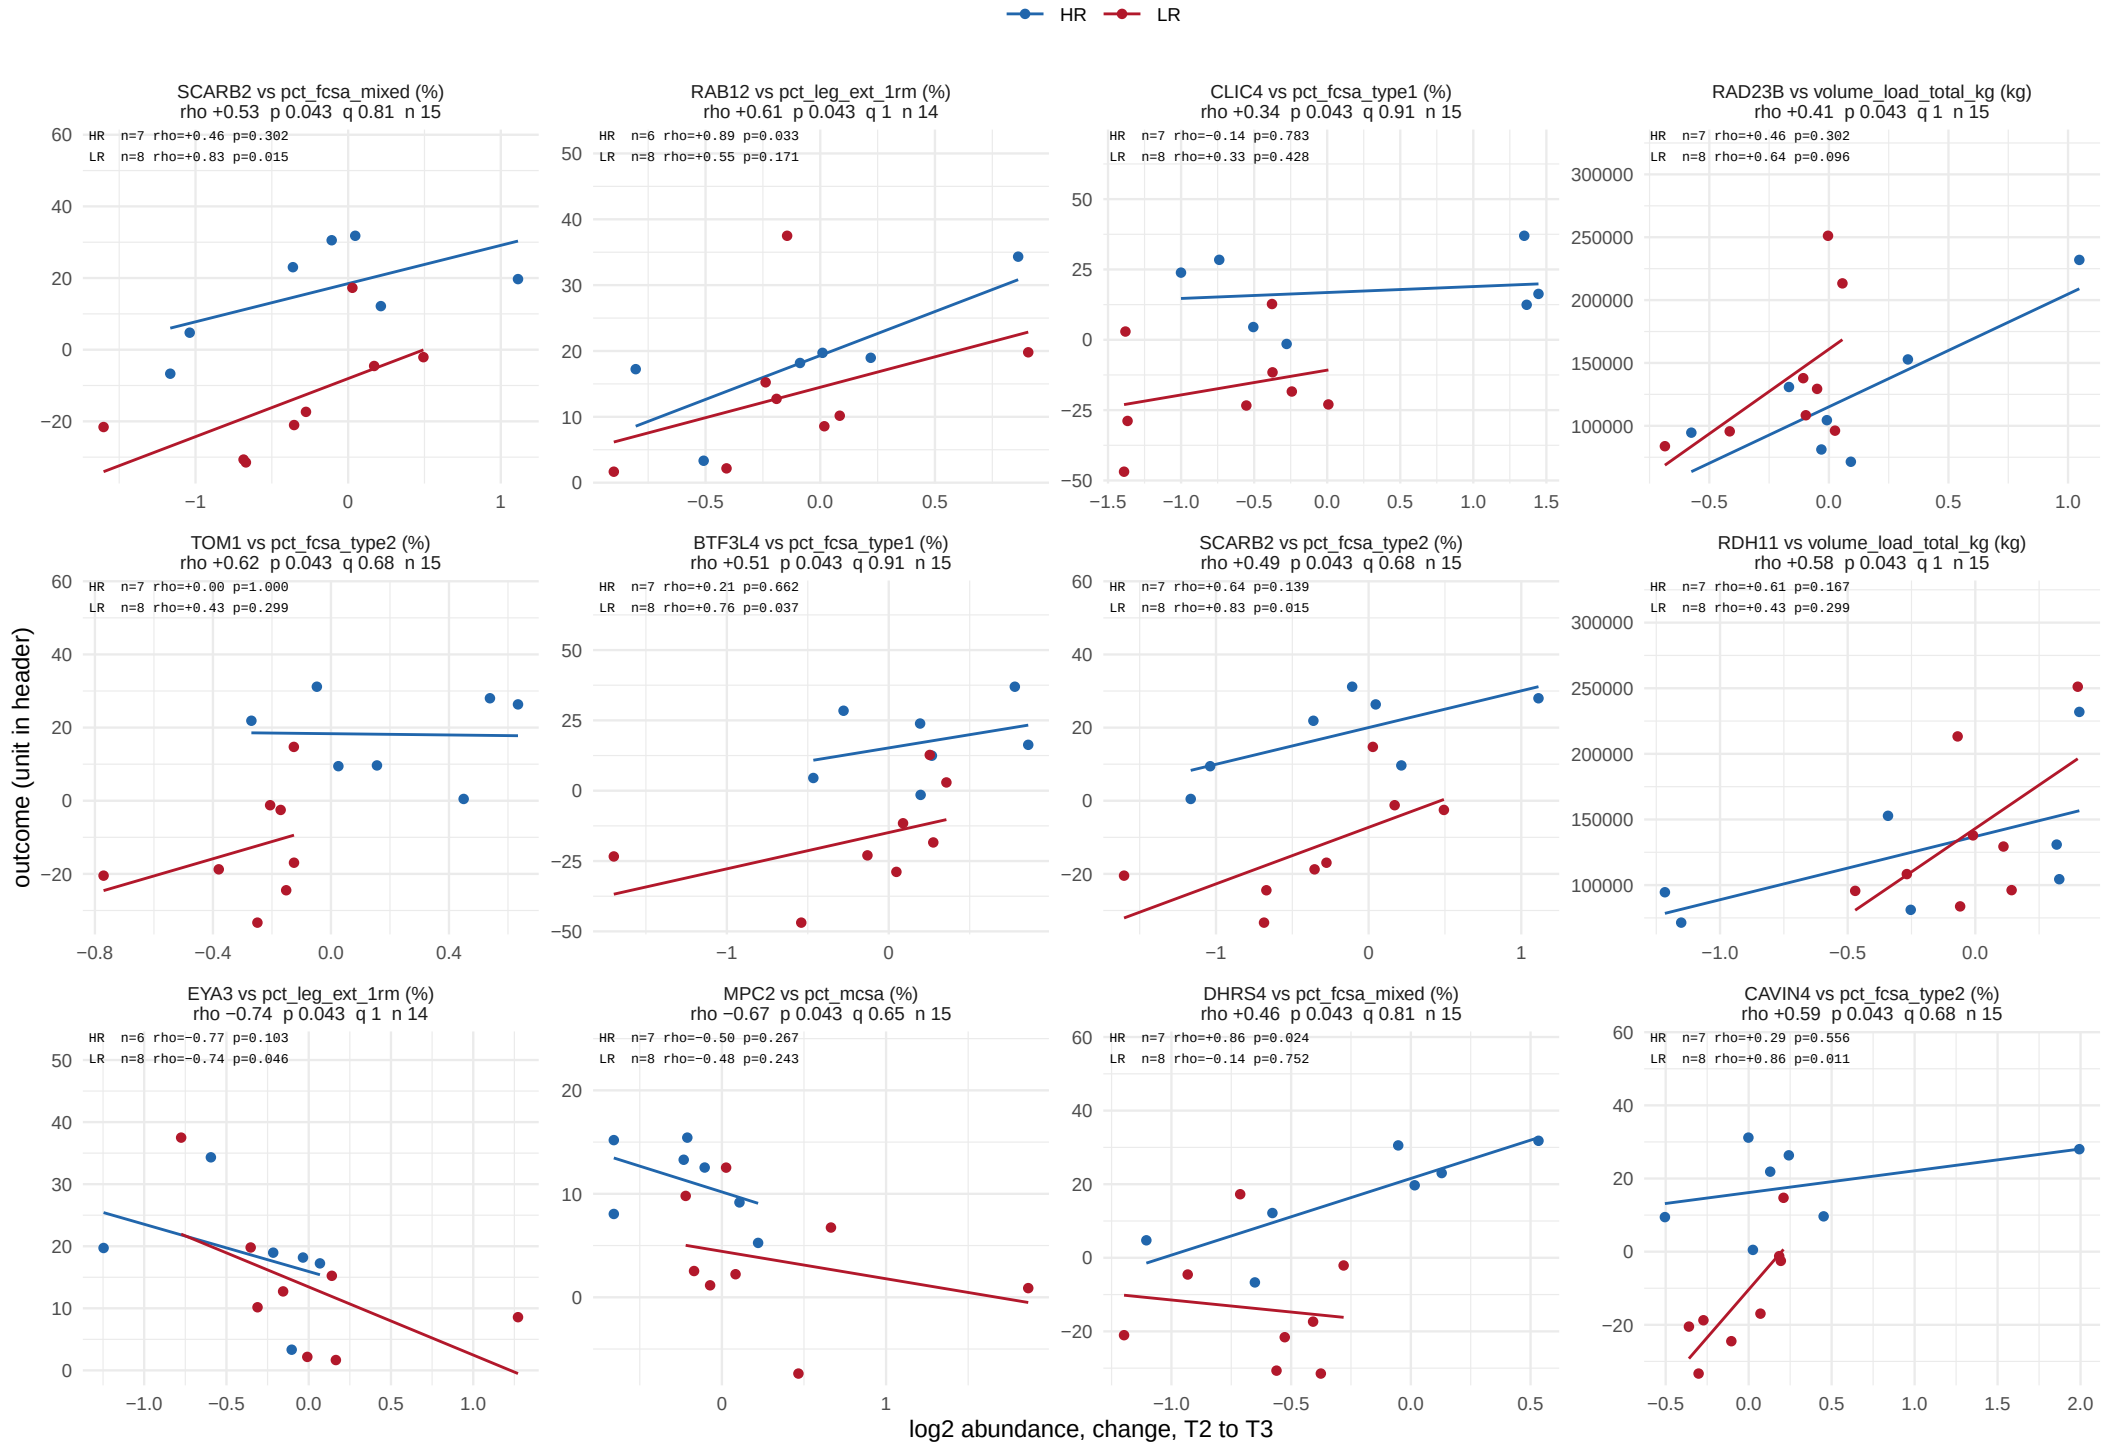

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


763 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 55 of 64.

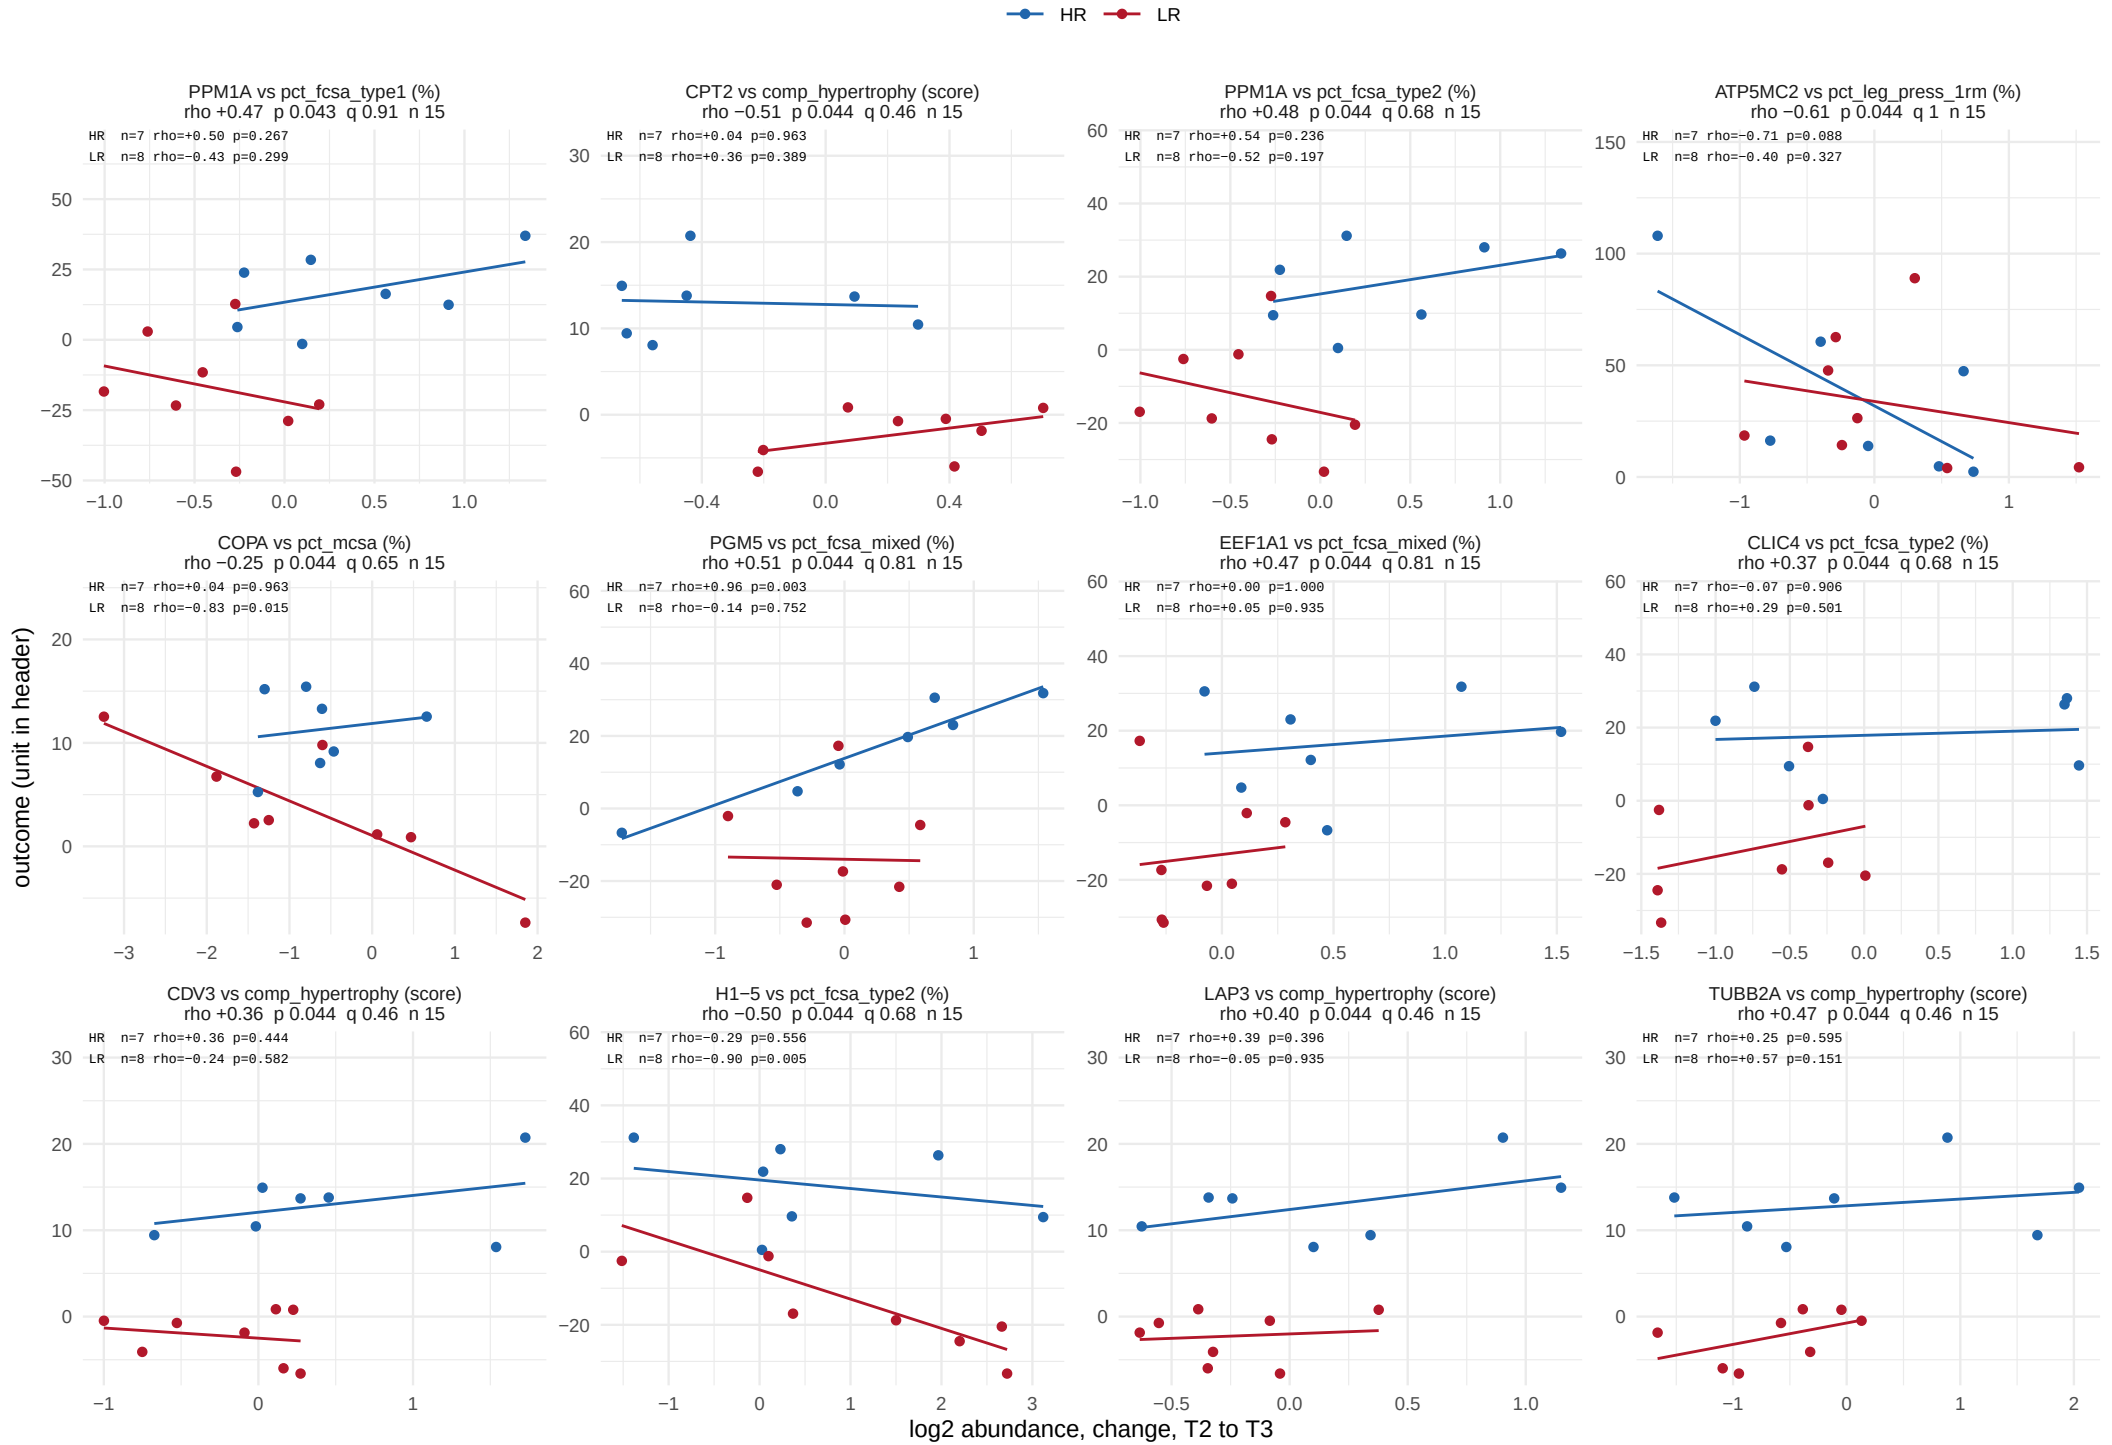

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


763 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 56 of 64.

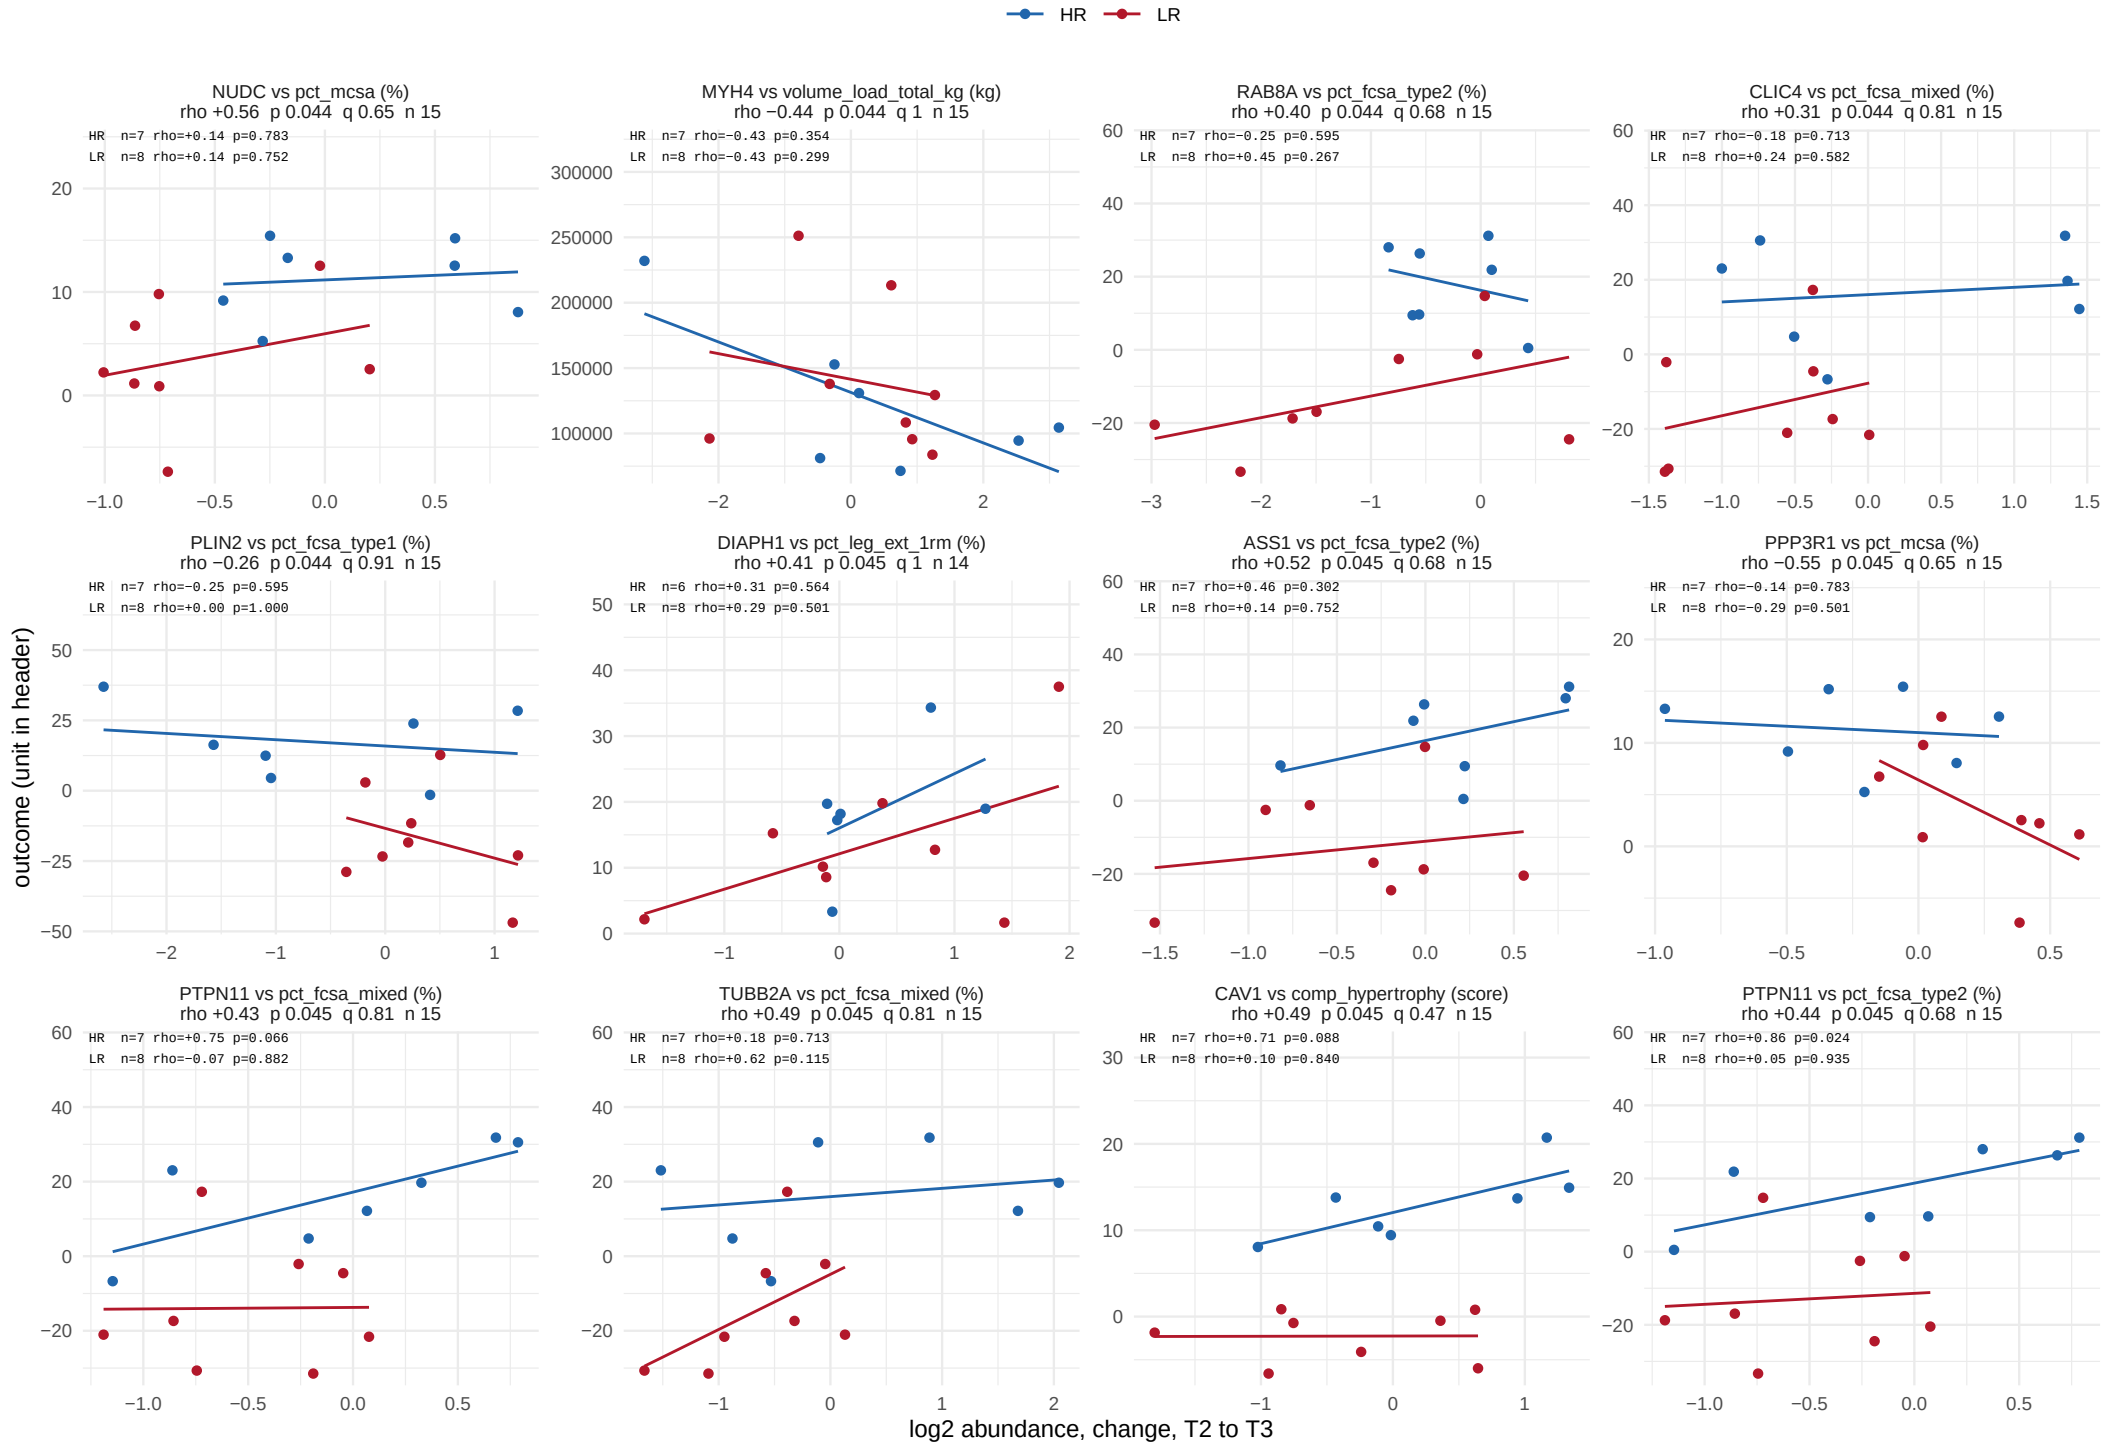

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


763 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 57 of 64.

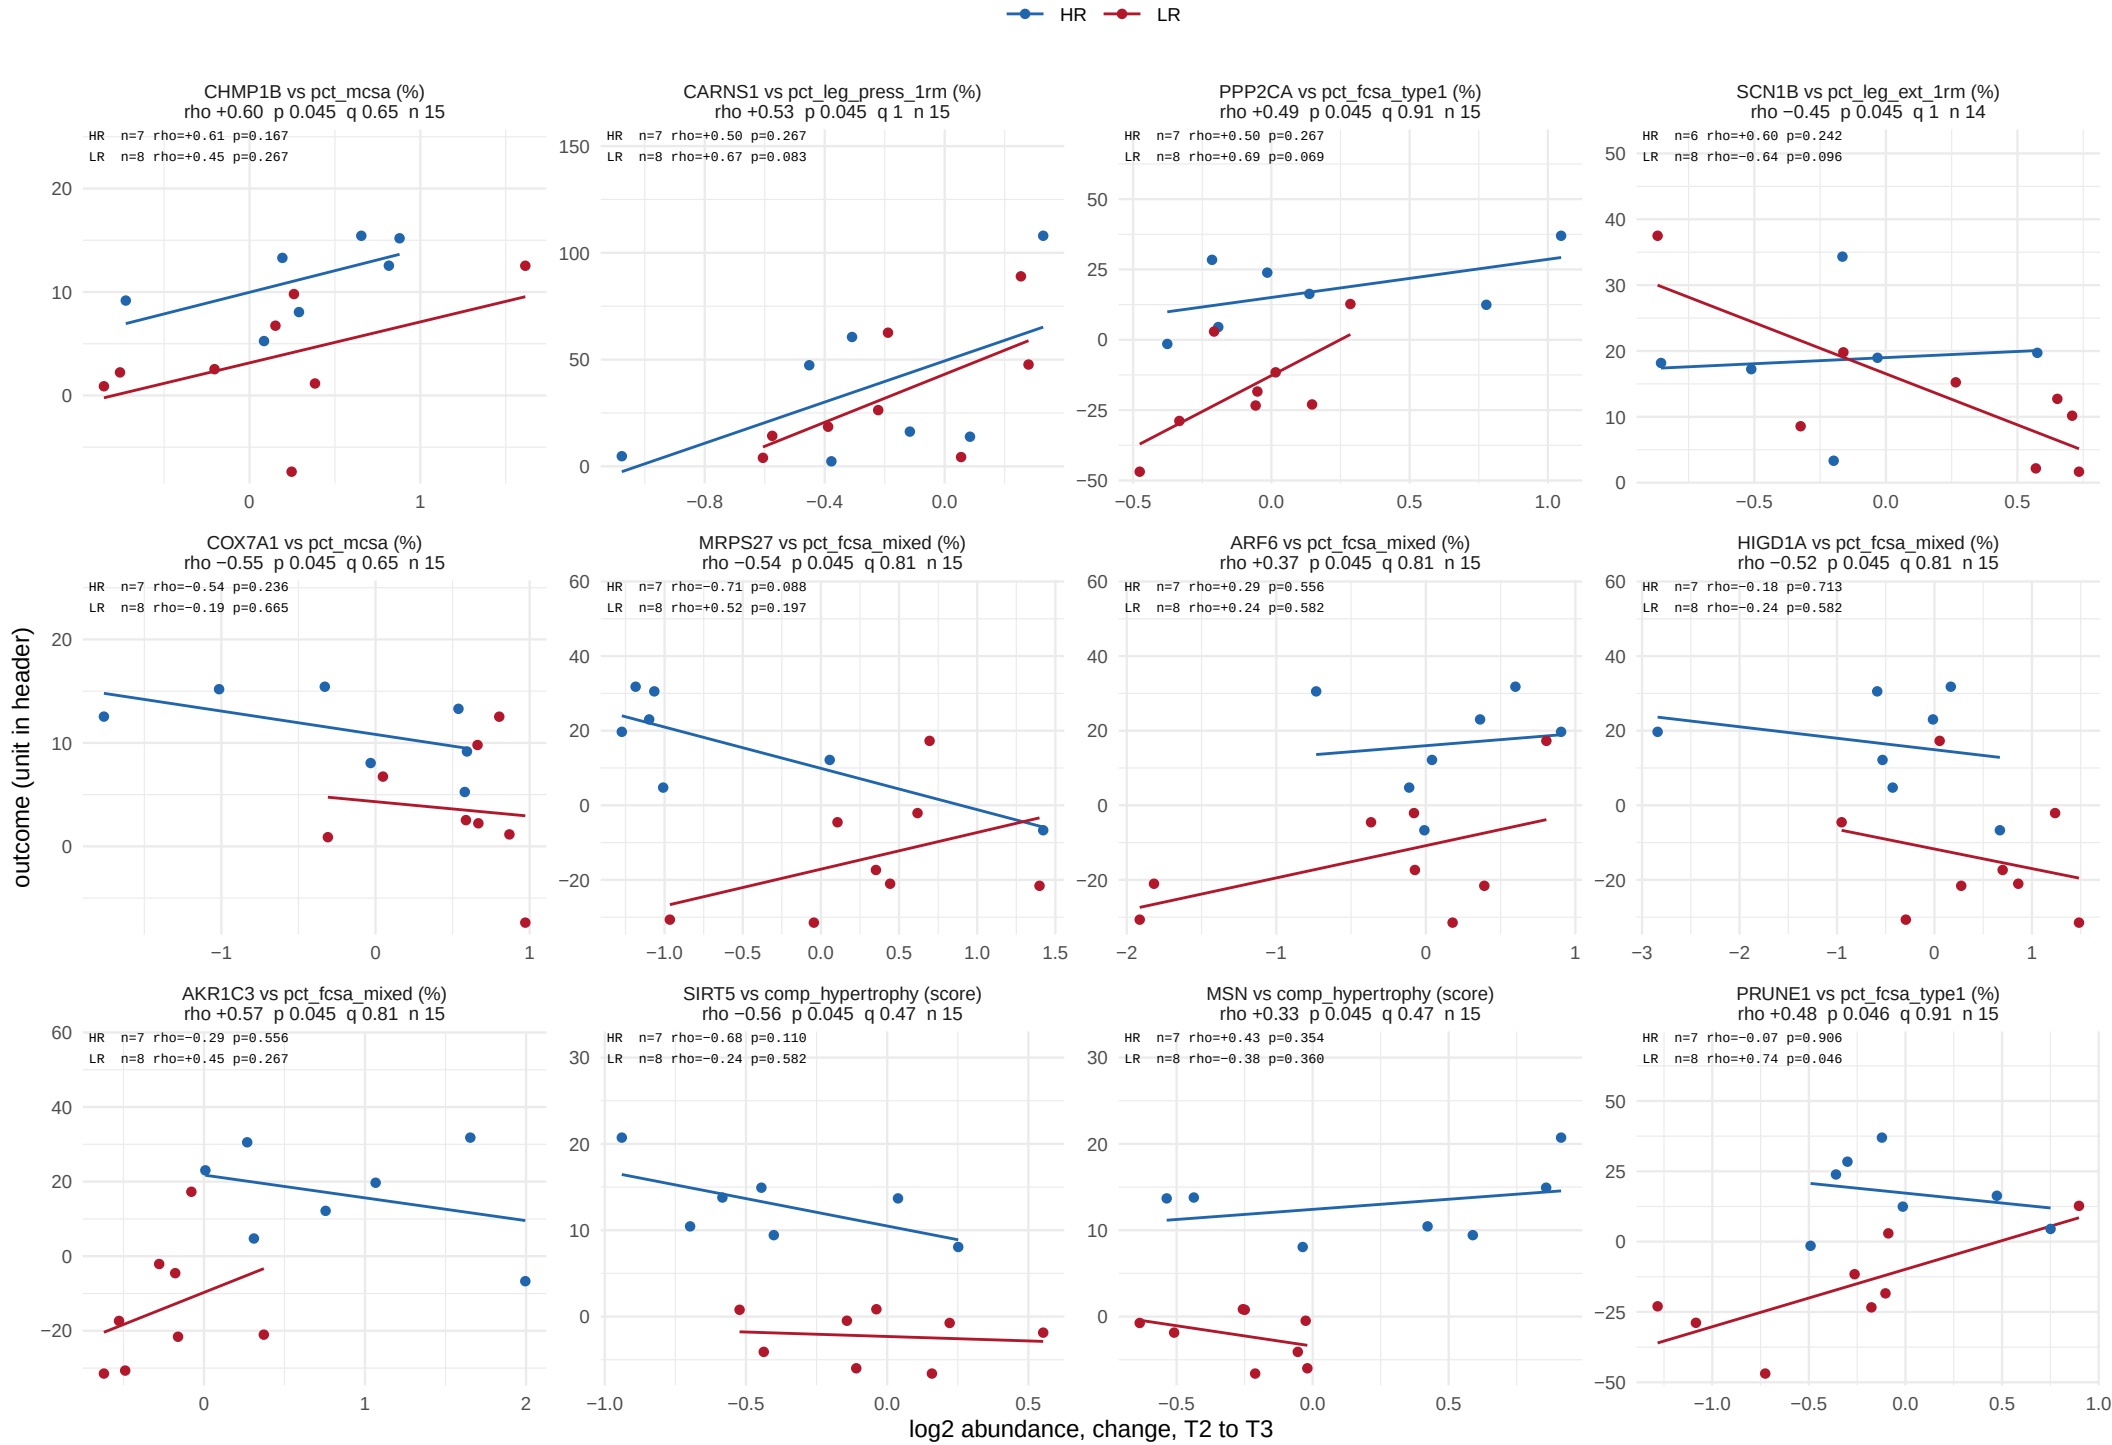

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


763 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 58 of 64.

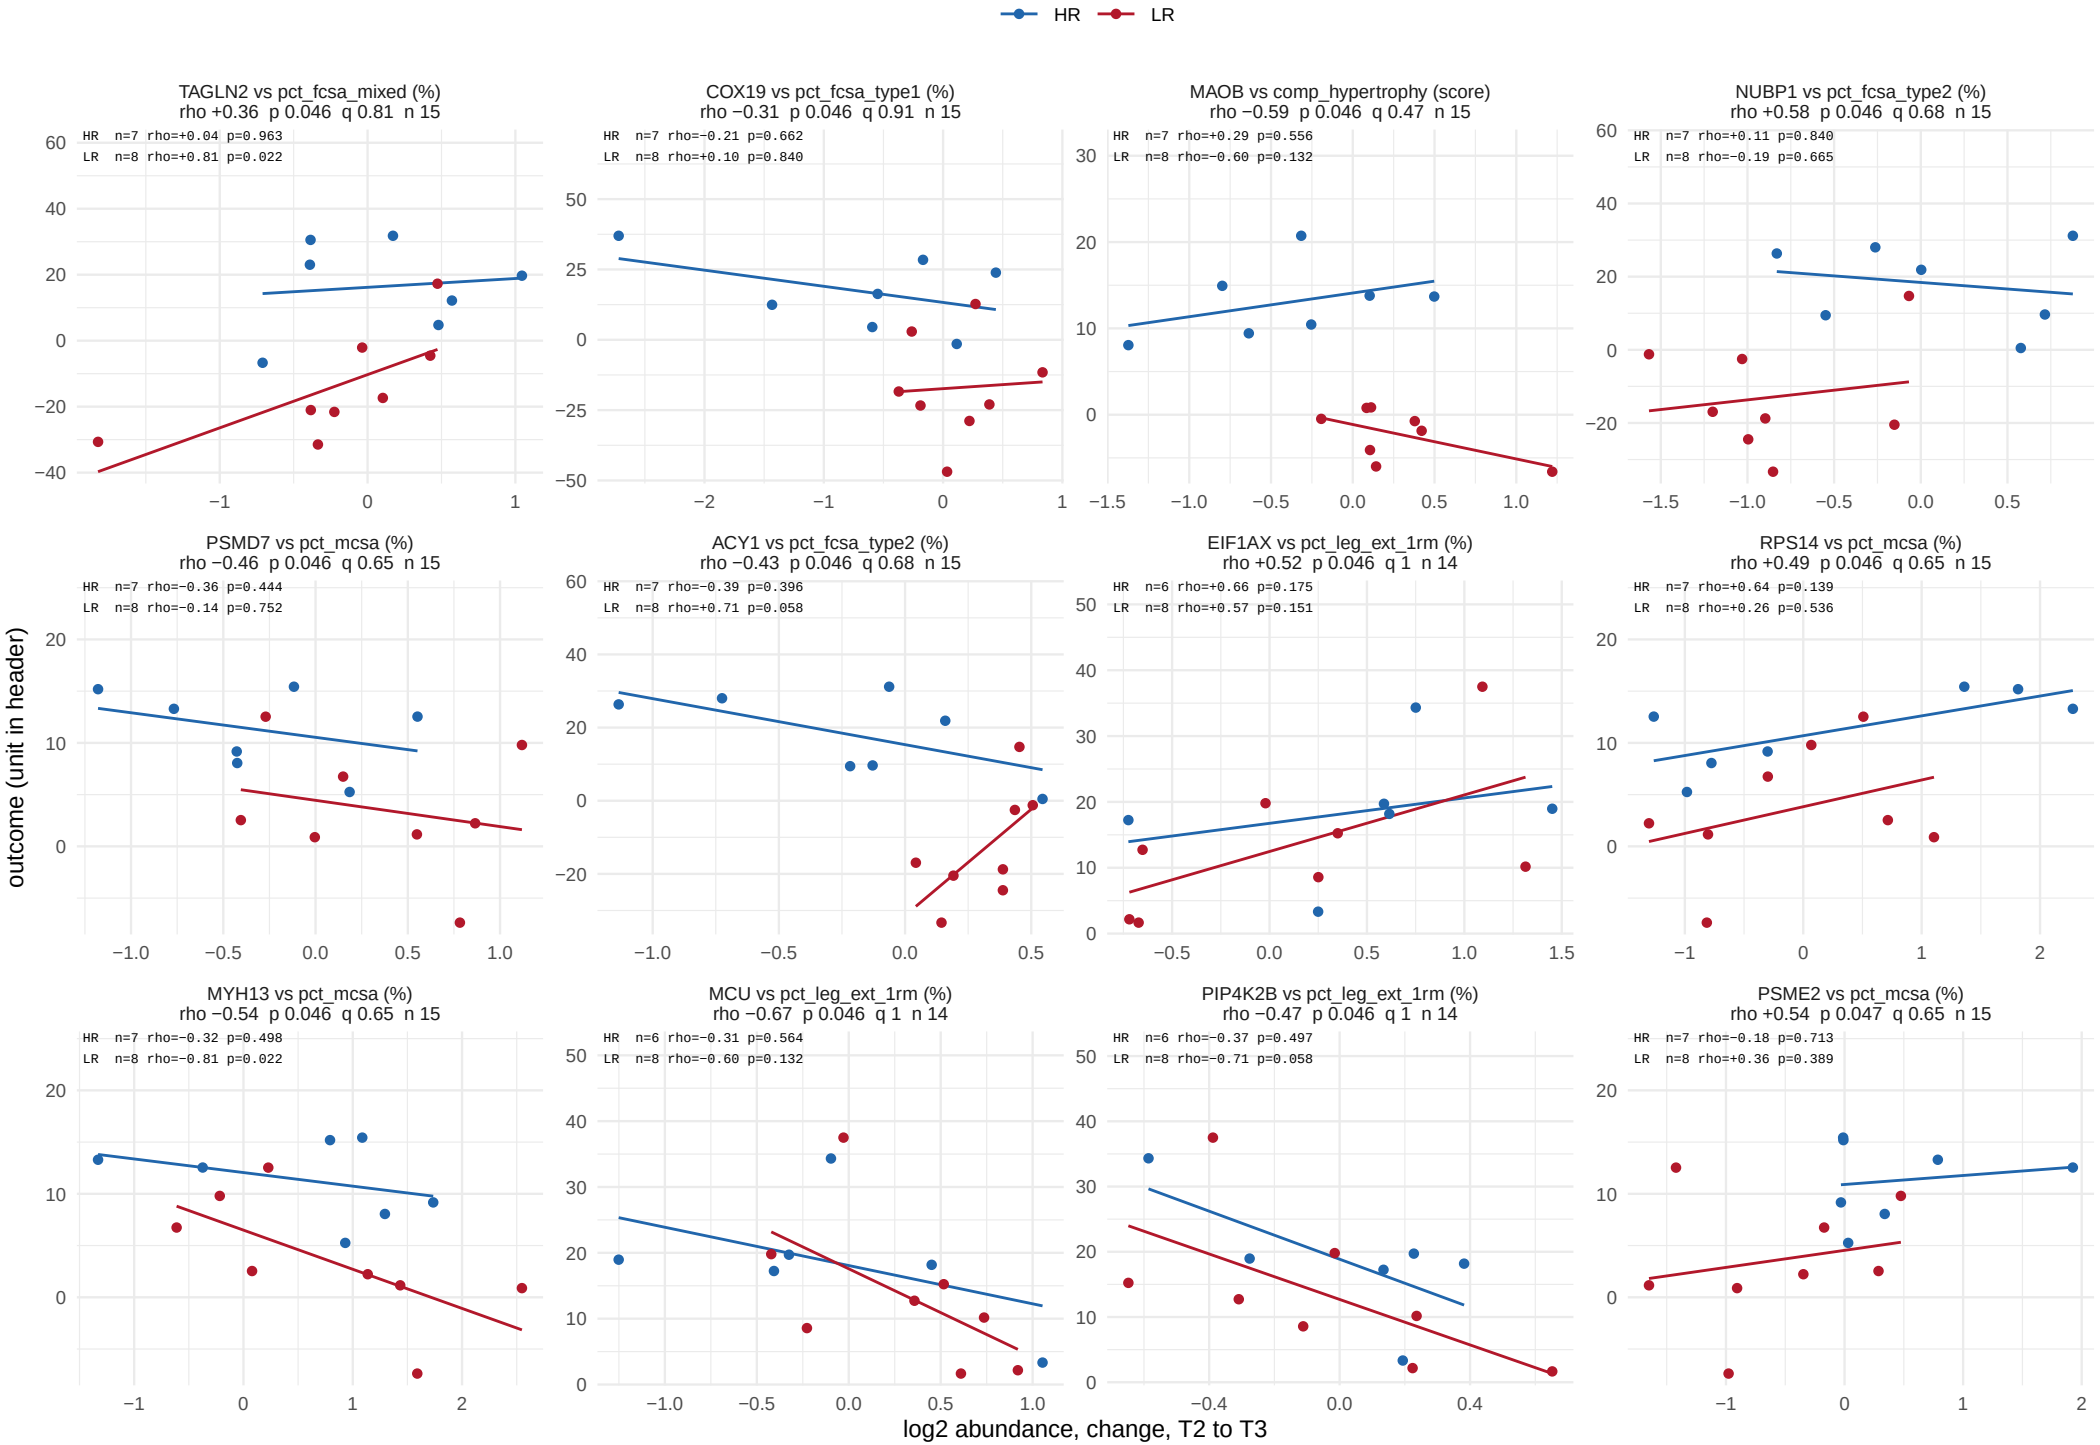

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


763 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 59 of 64.

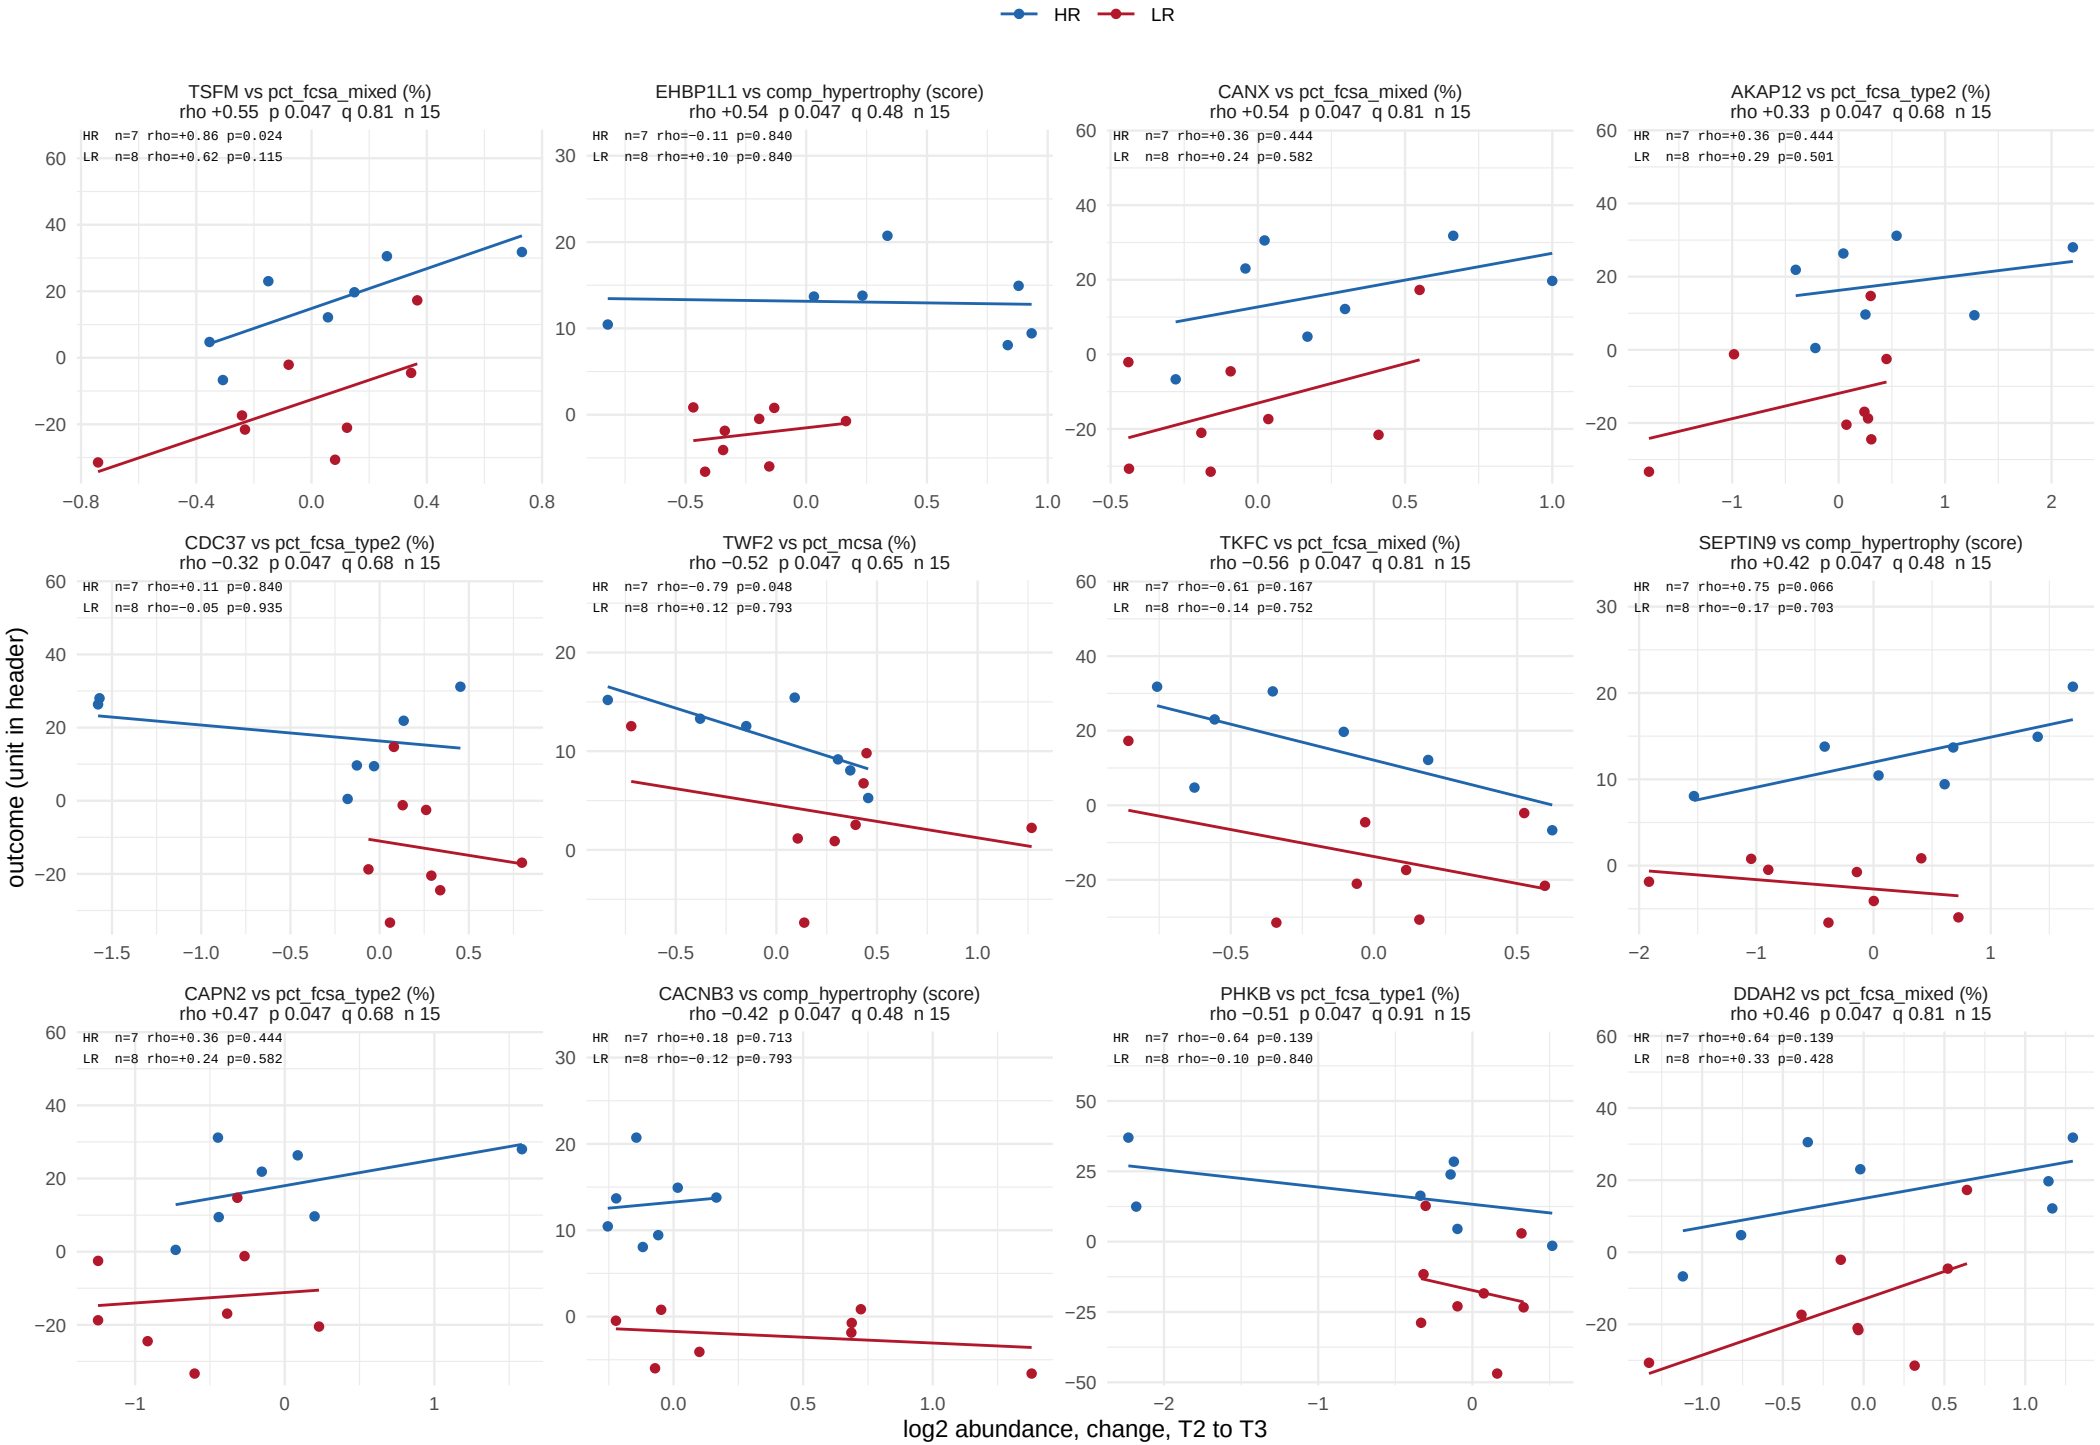

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


763 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 60 of 64.

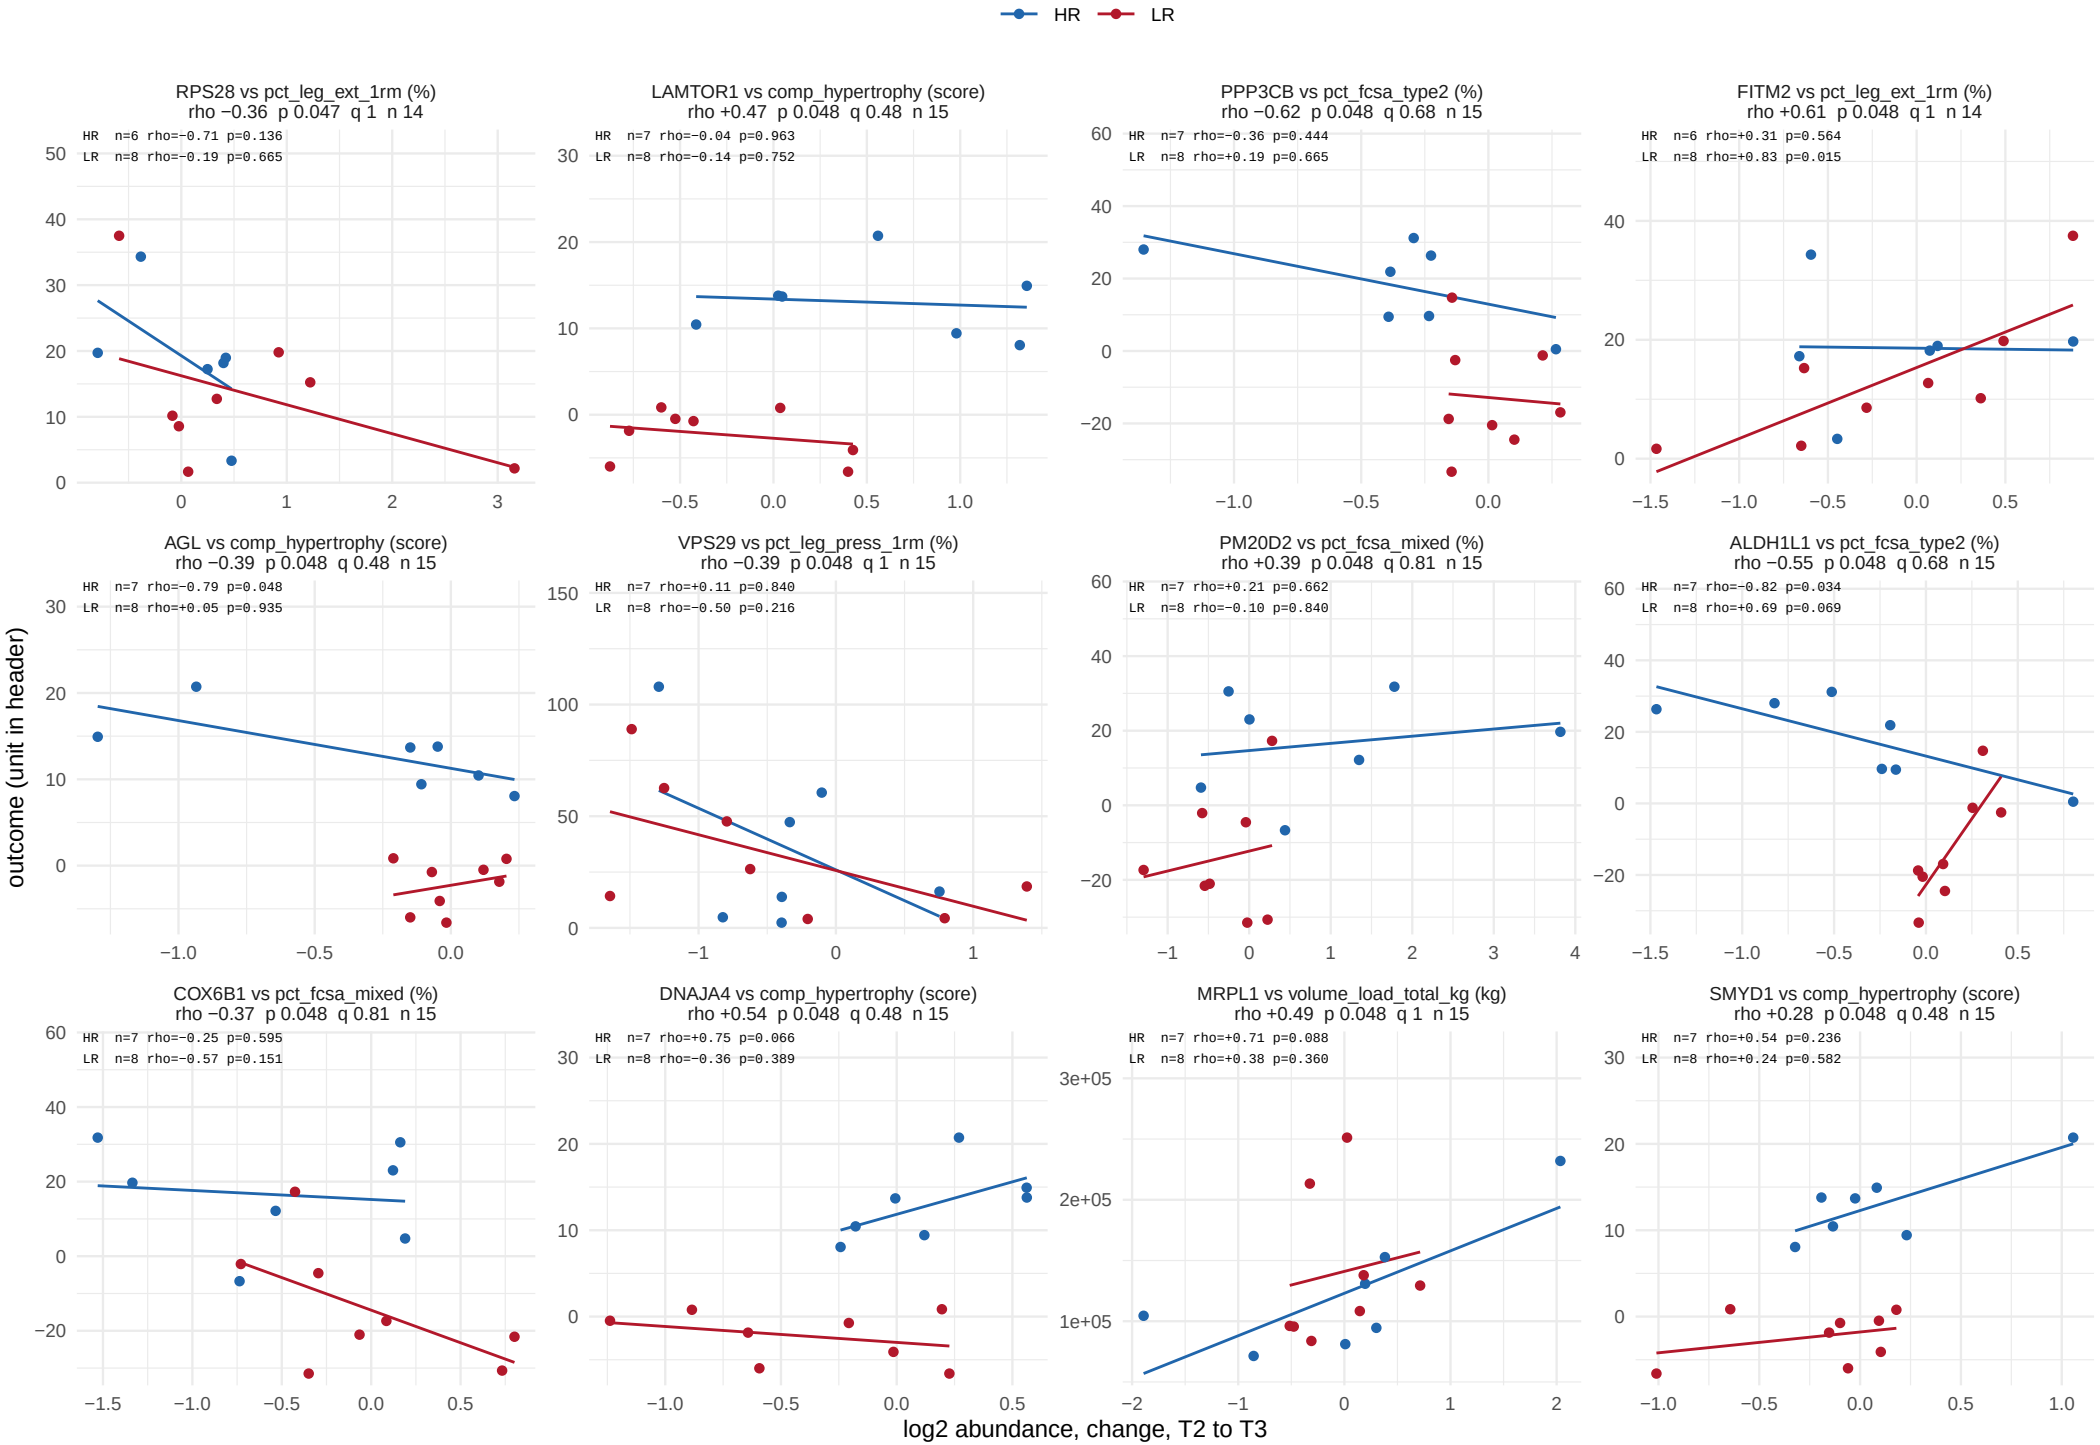

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


763 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 61 of 64.

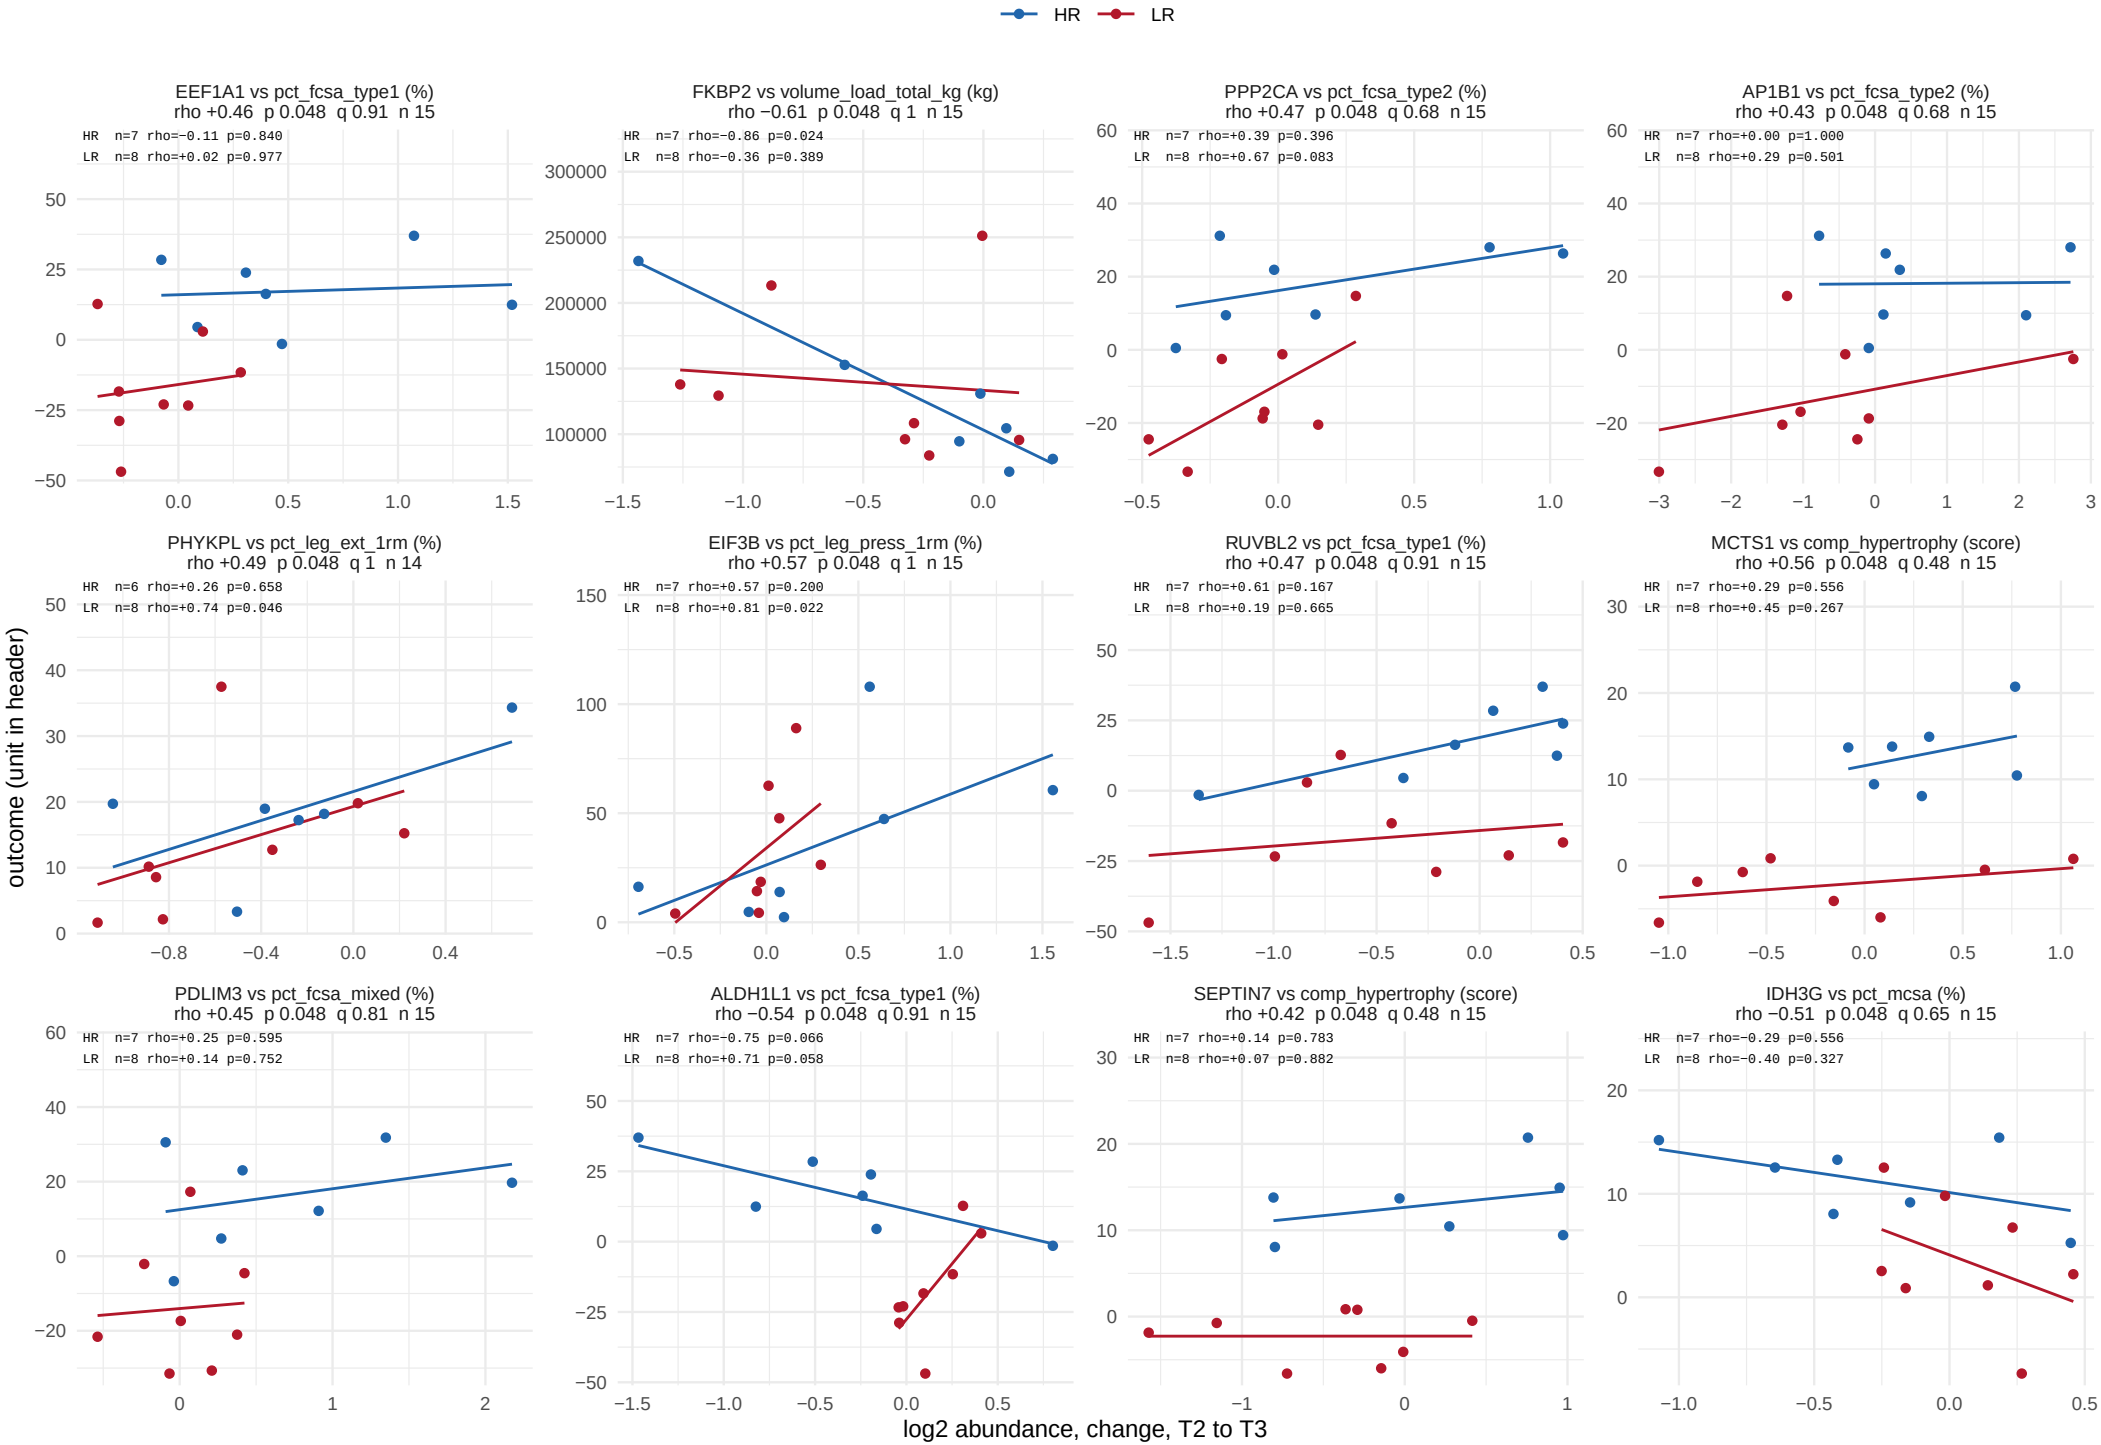

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


763 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 62 of 64.

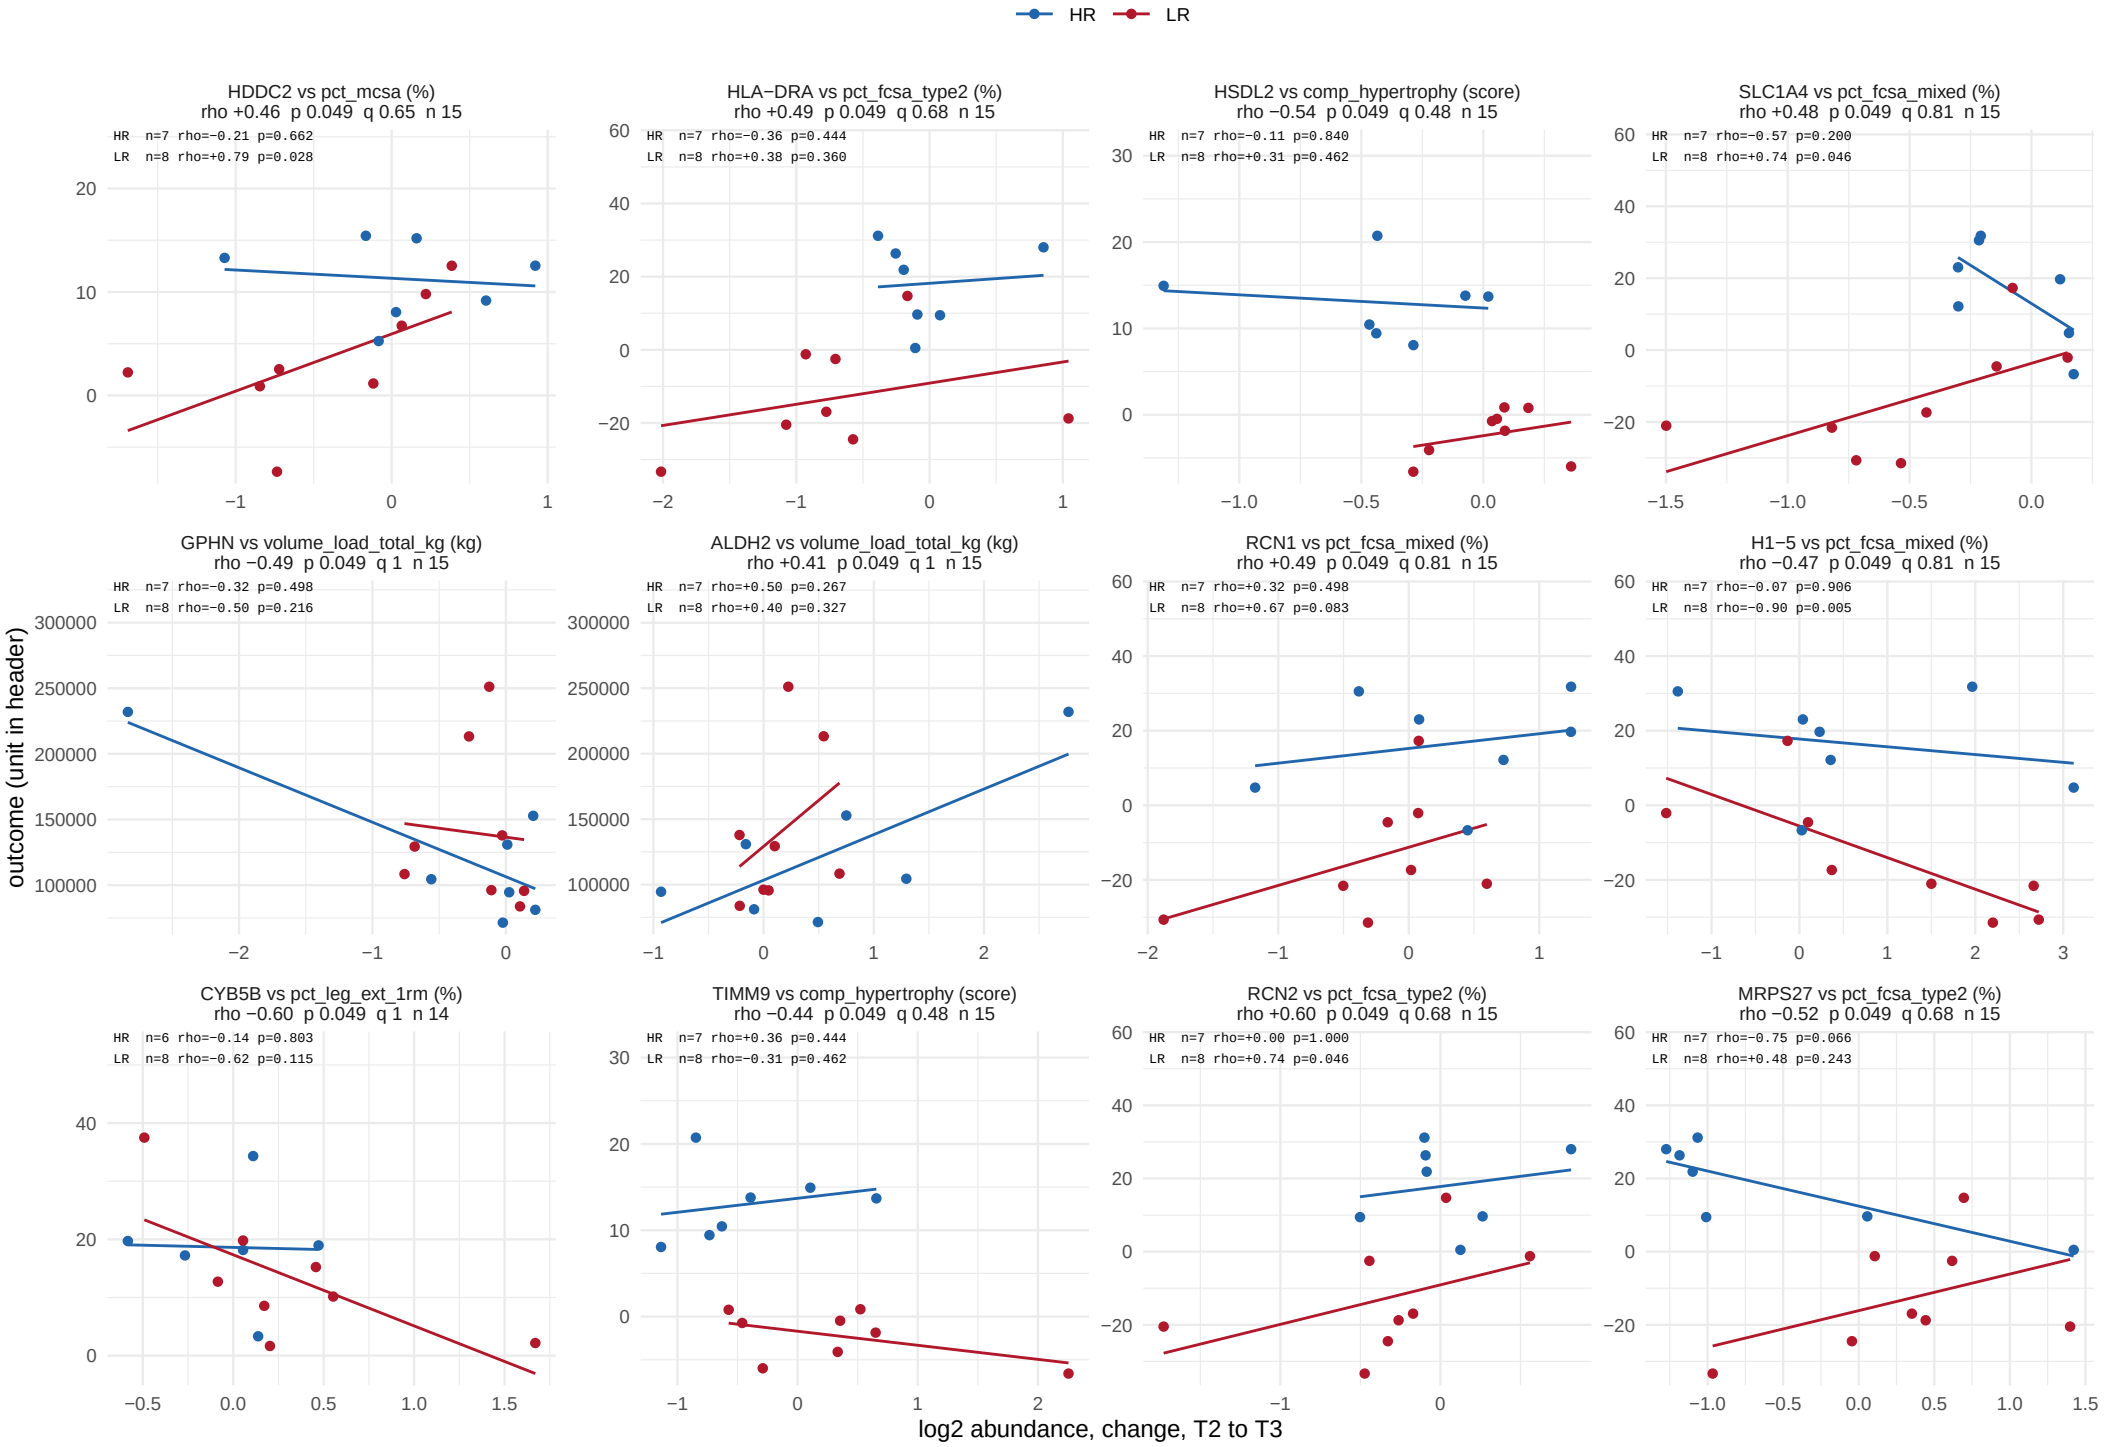

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


763 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 63 of 64.

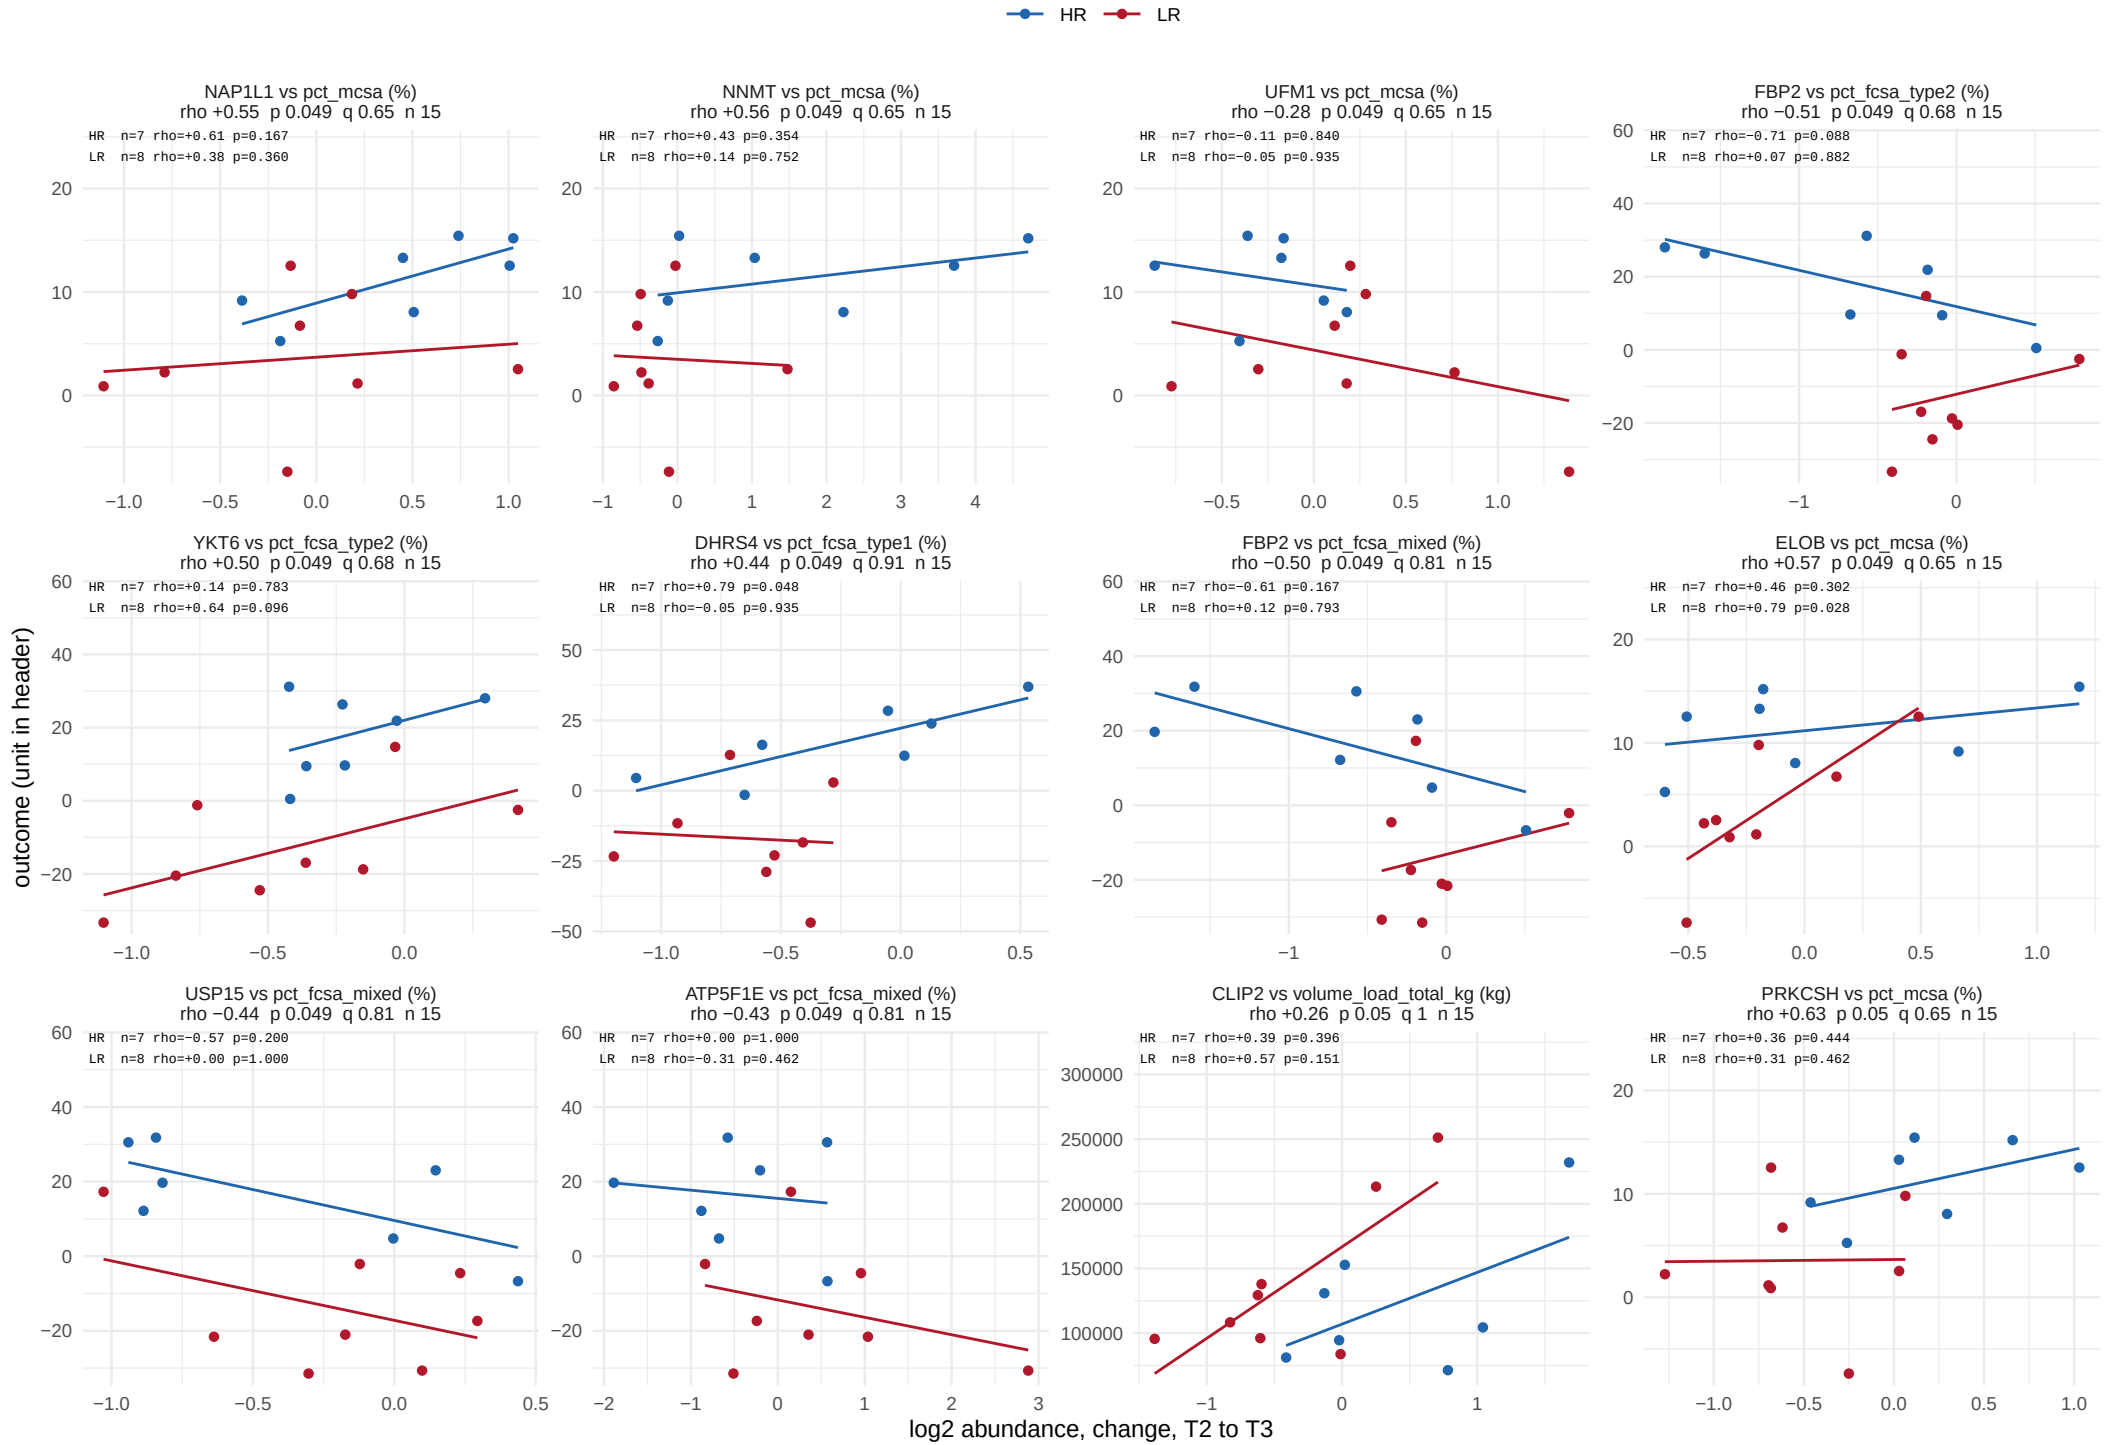

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


763 of 15200 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 64 of 64.

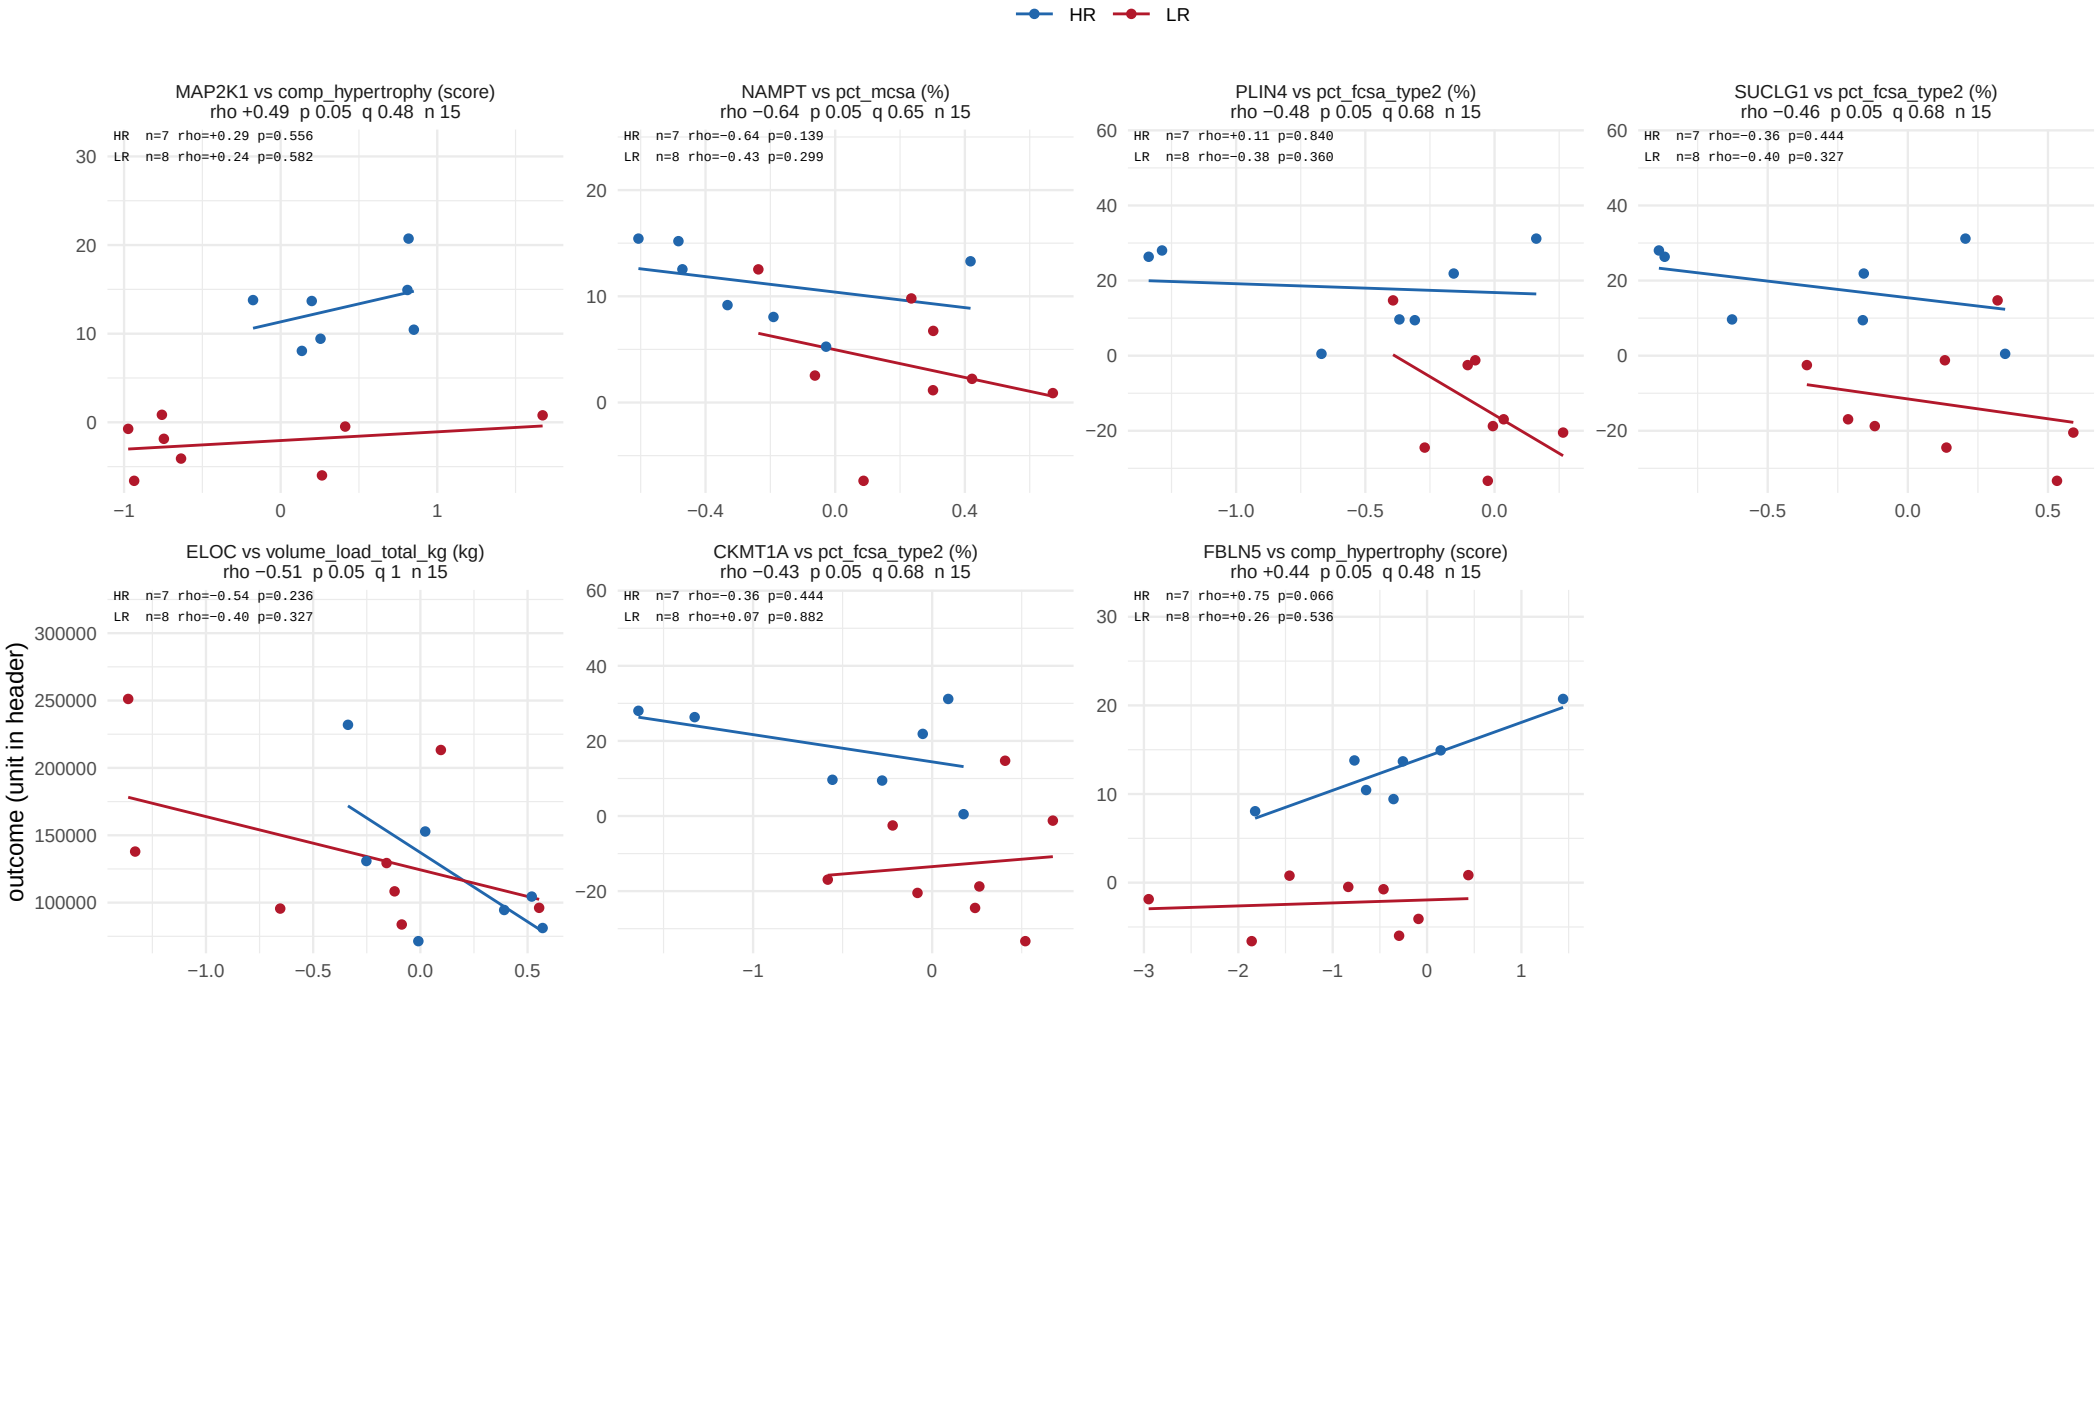

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


693 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 1 of 58.

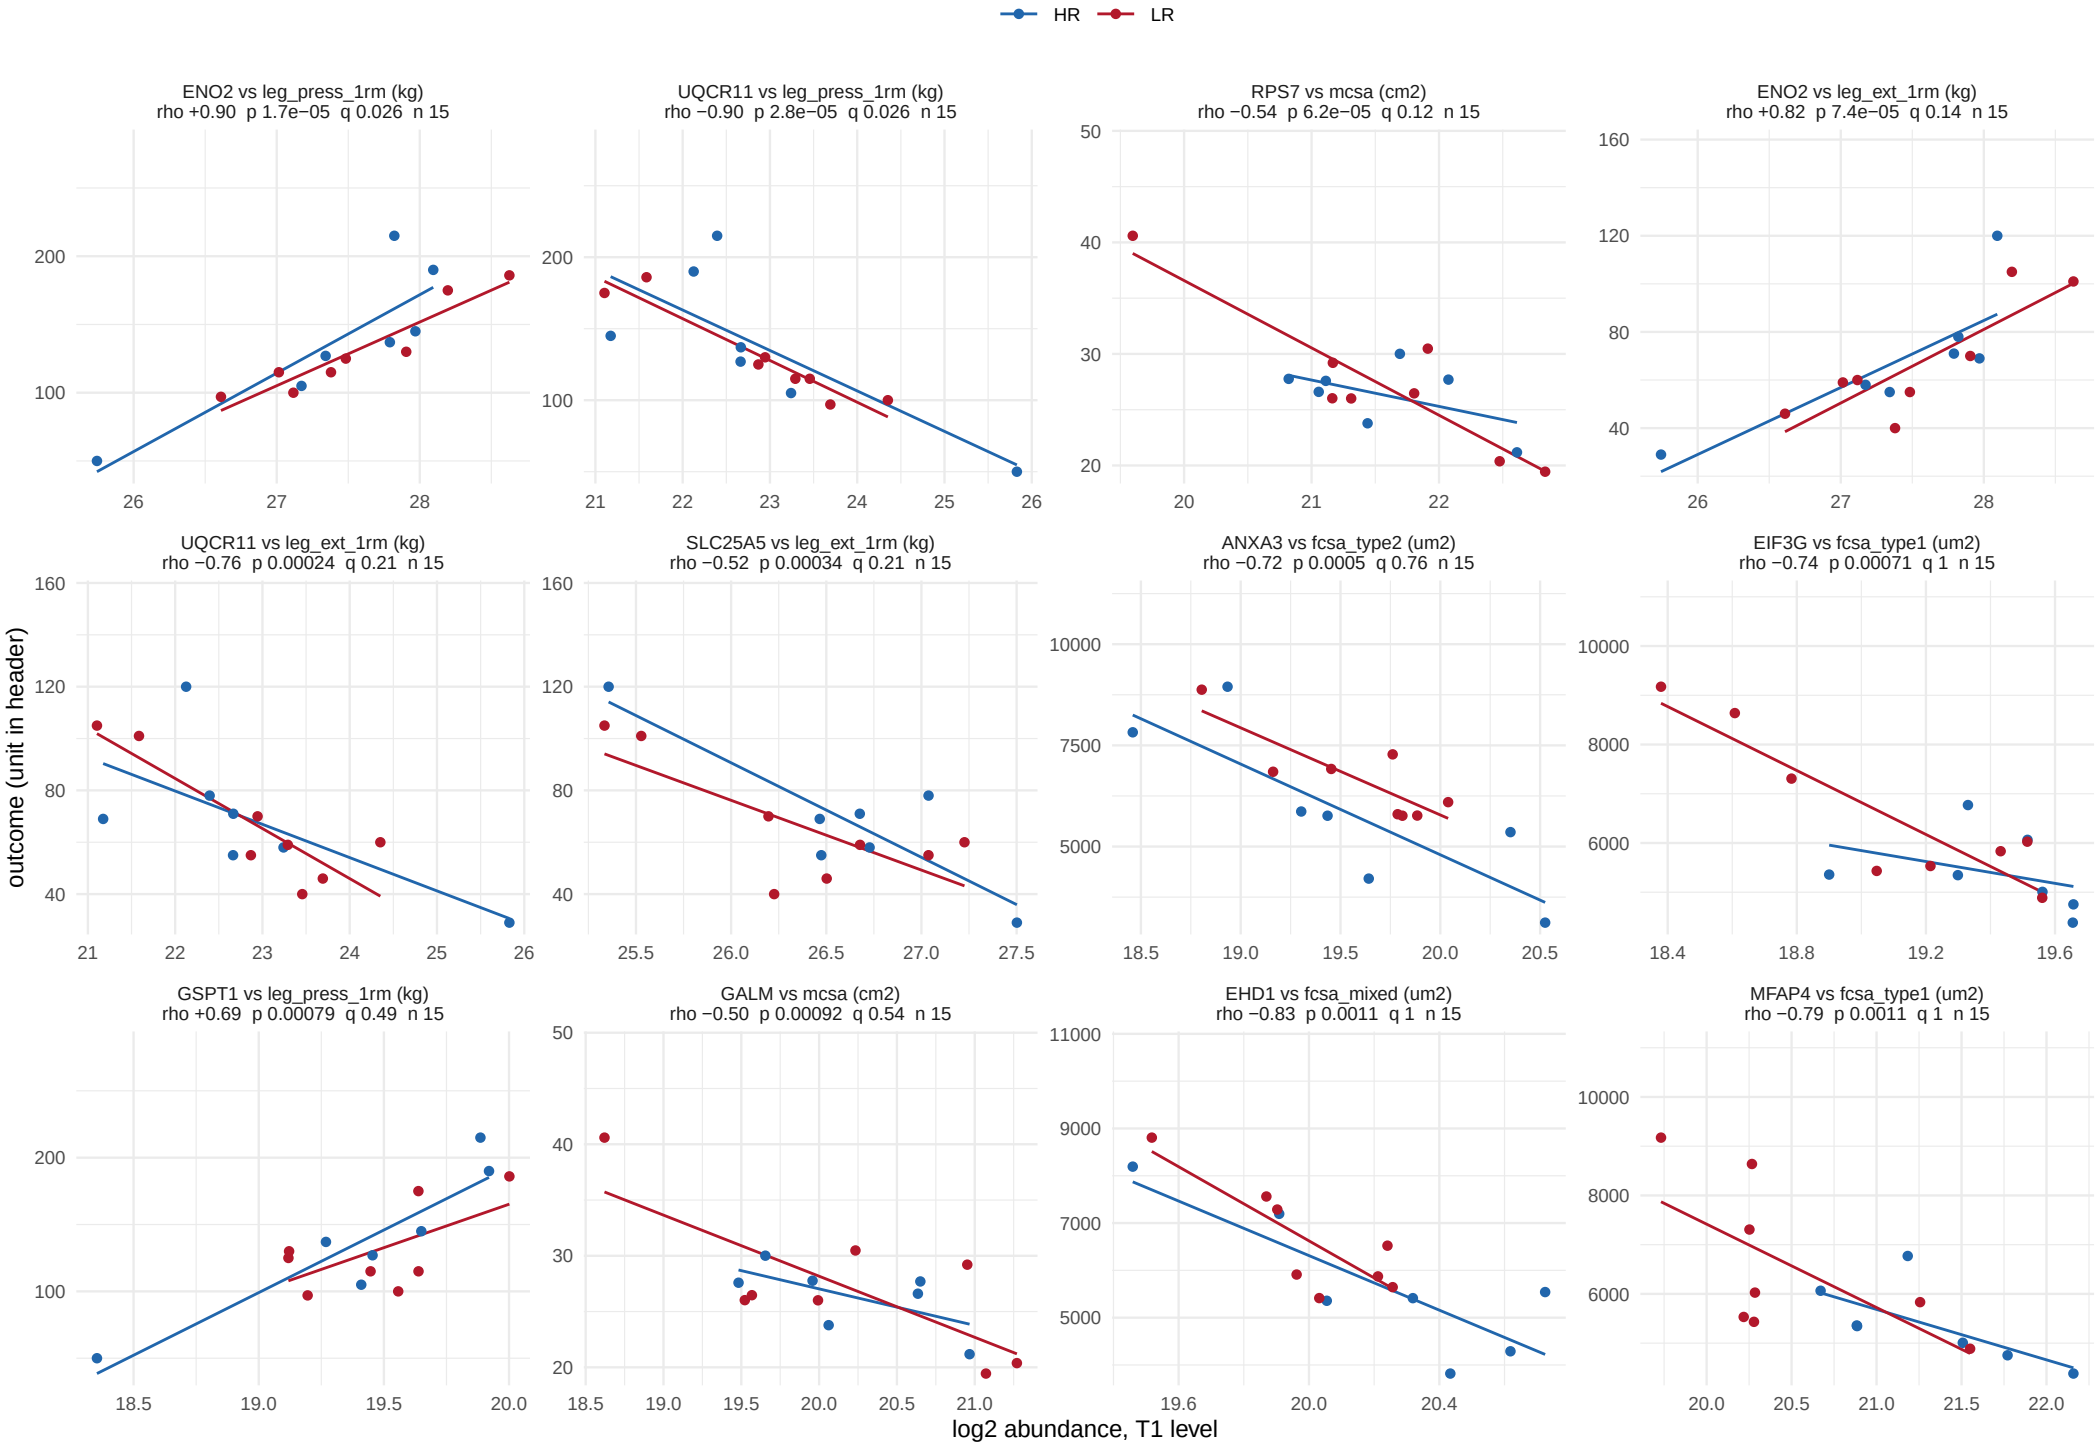

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


693 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 2 of 58.

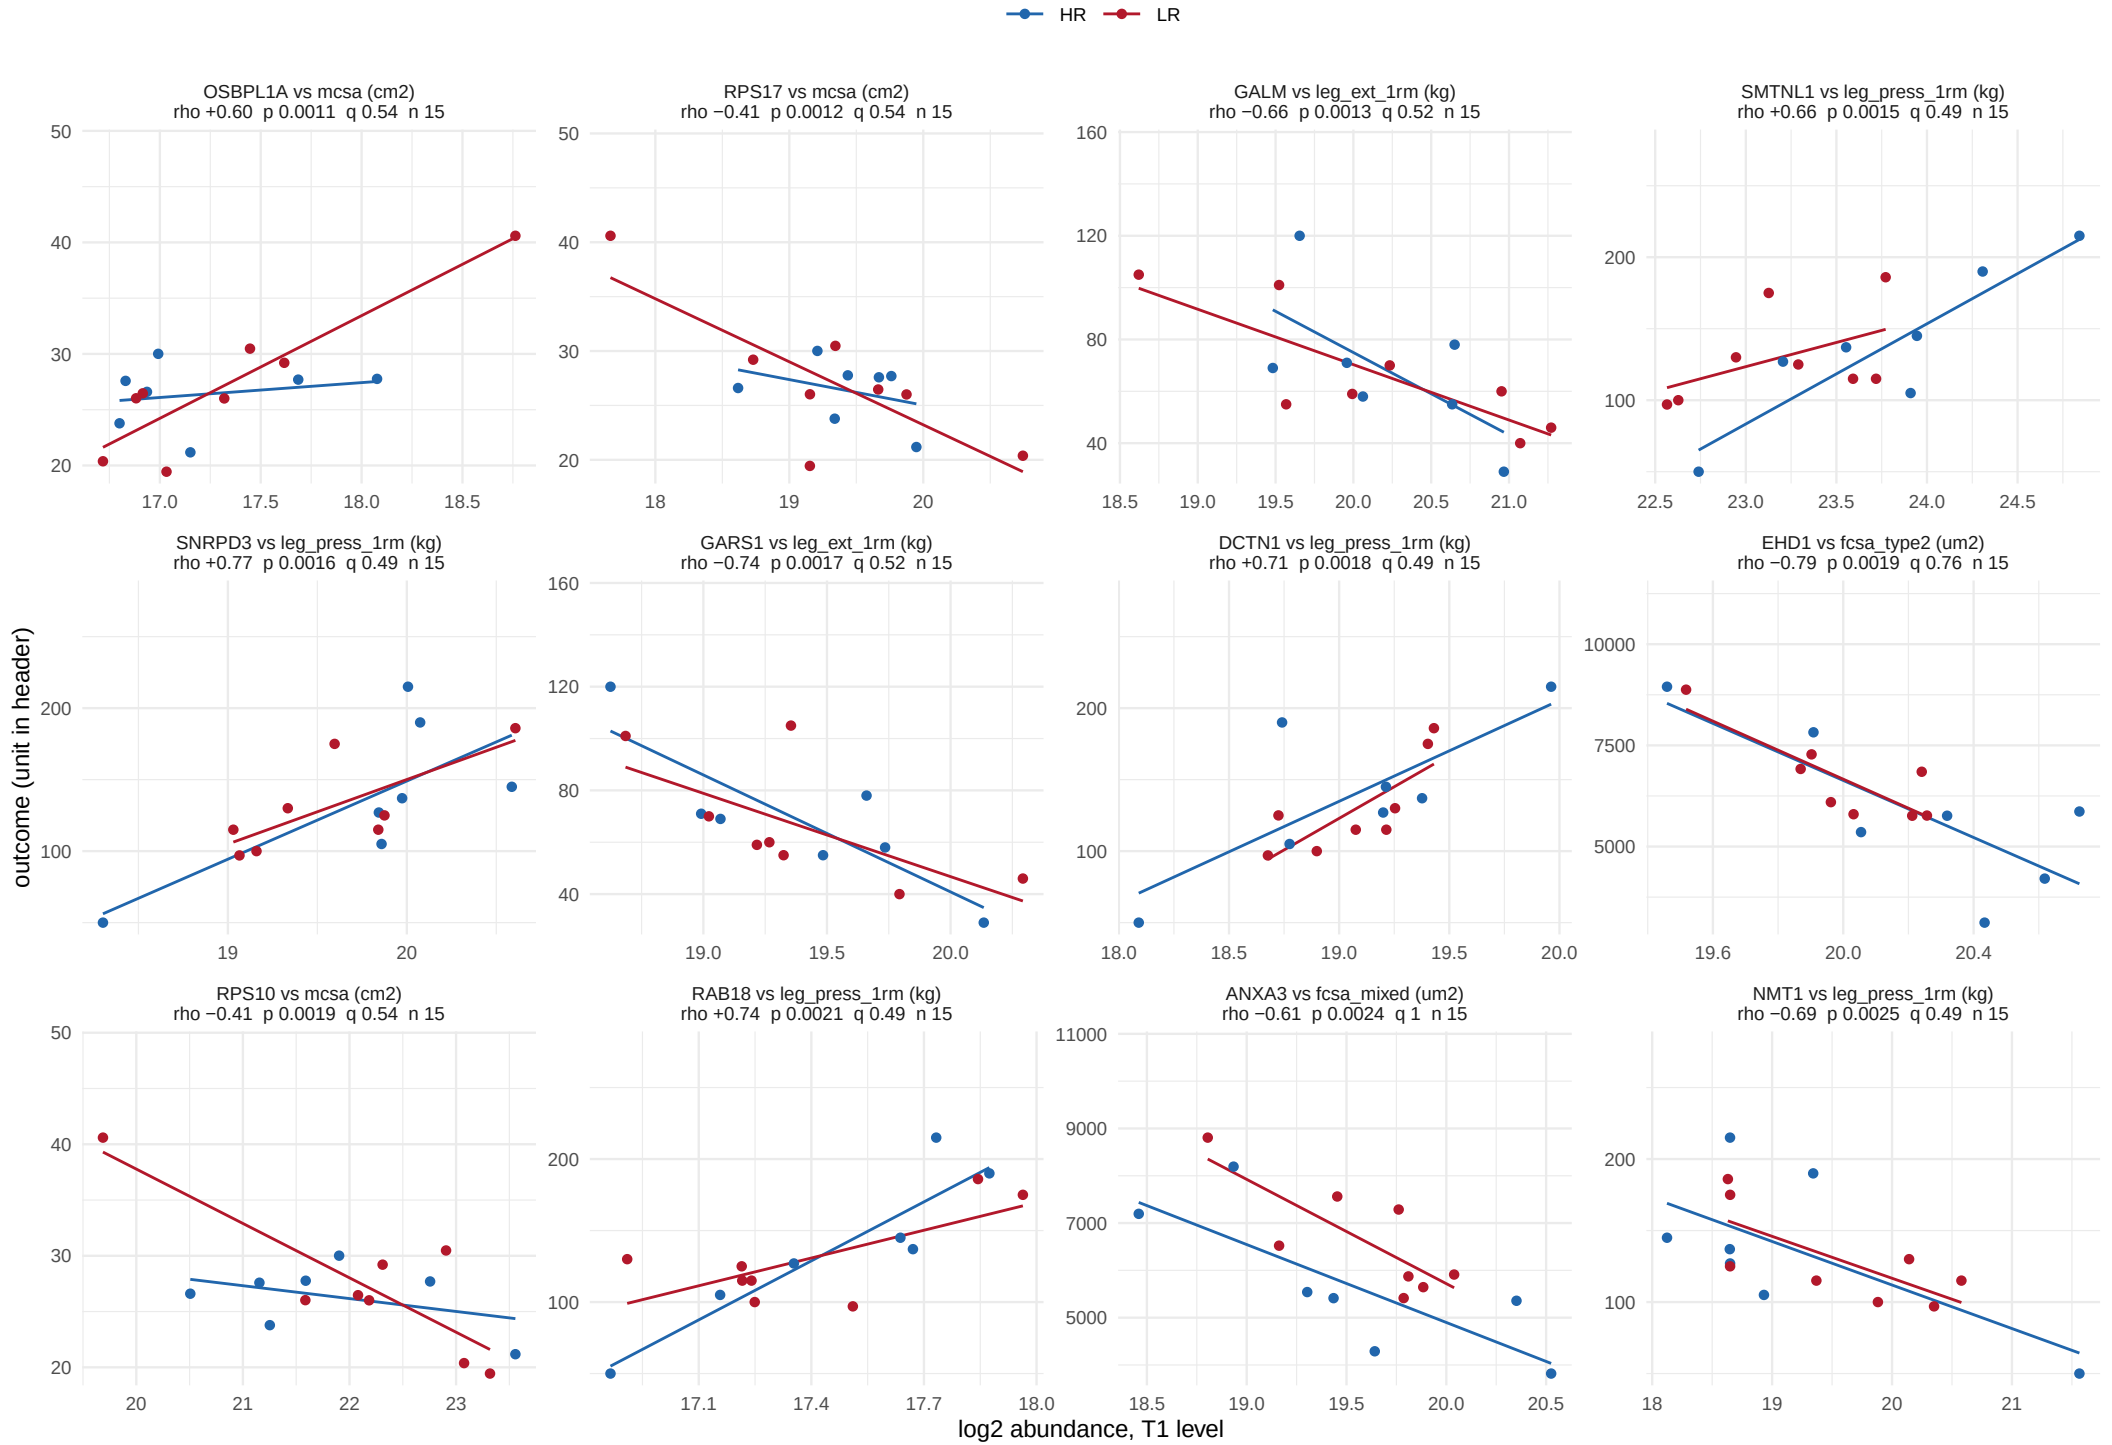

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window

693 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 3 of 58.

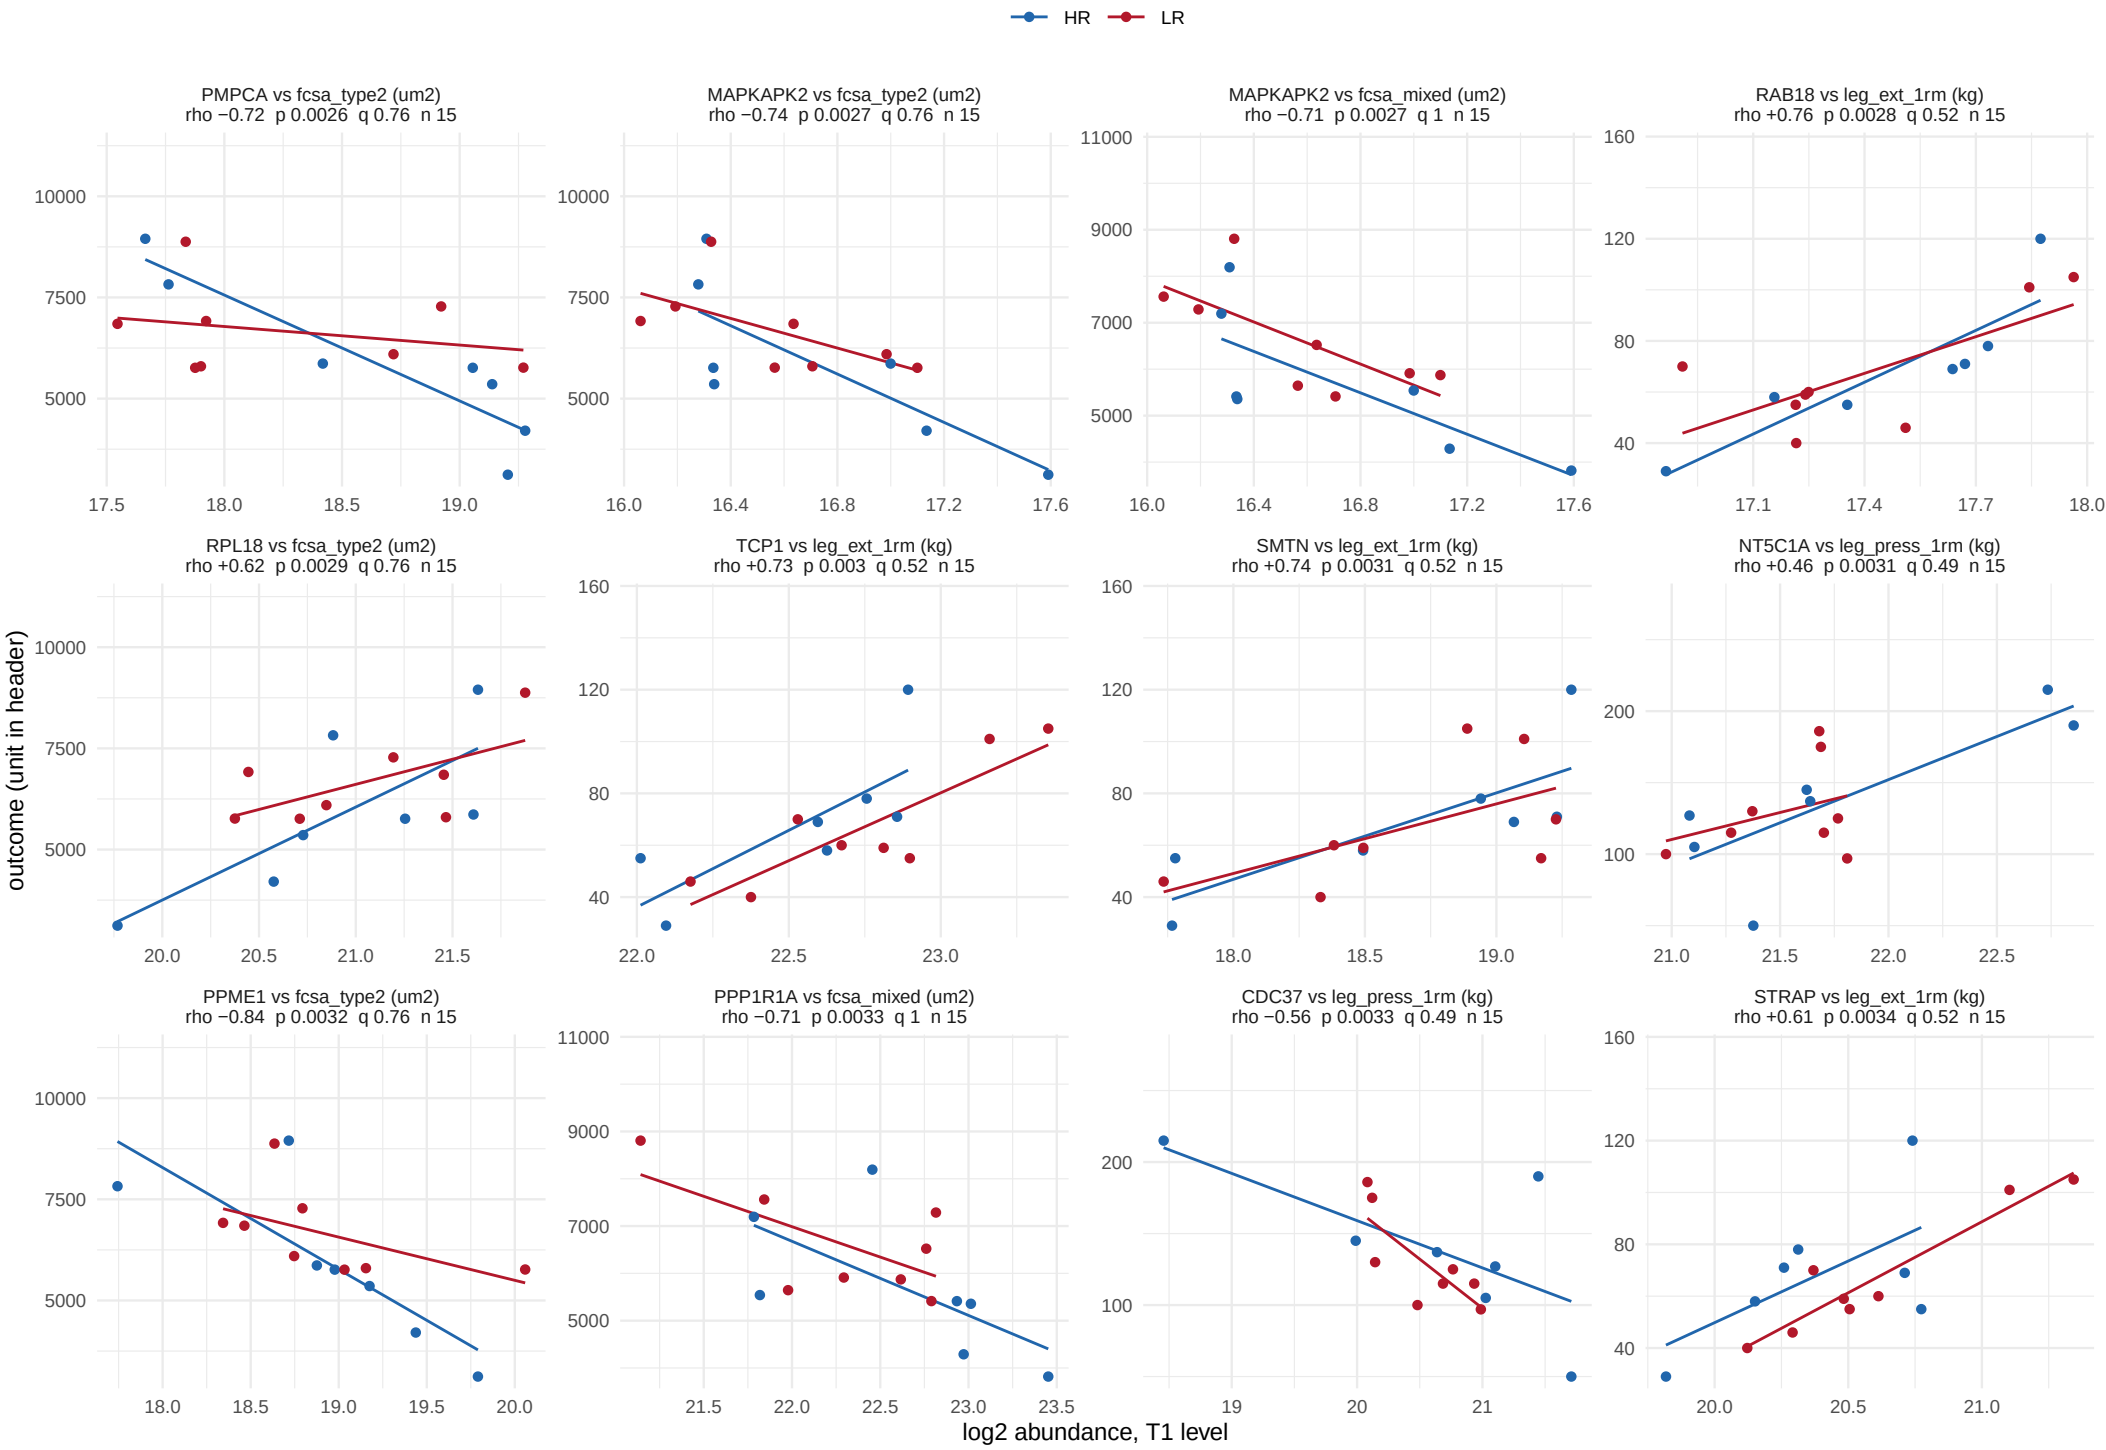

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


693 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 4 of 58.



One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window

693 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 5 of 58.

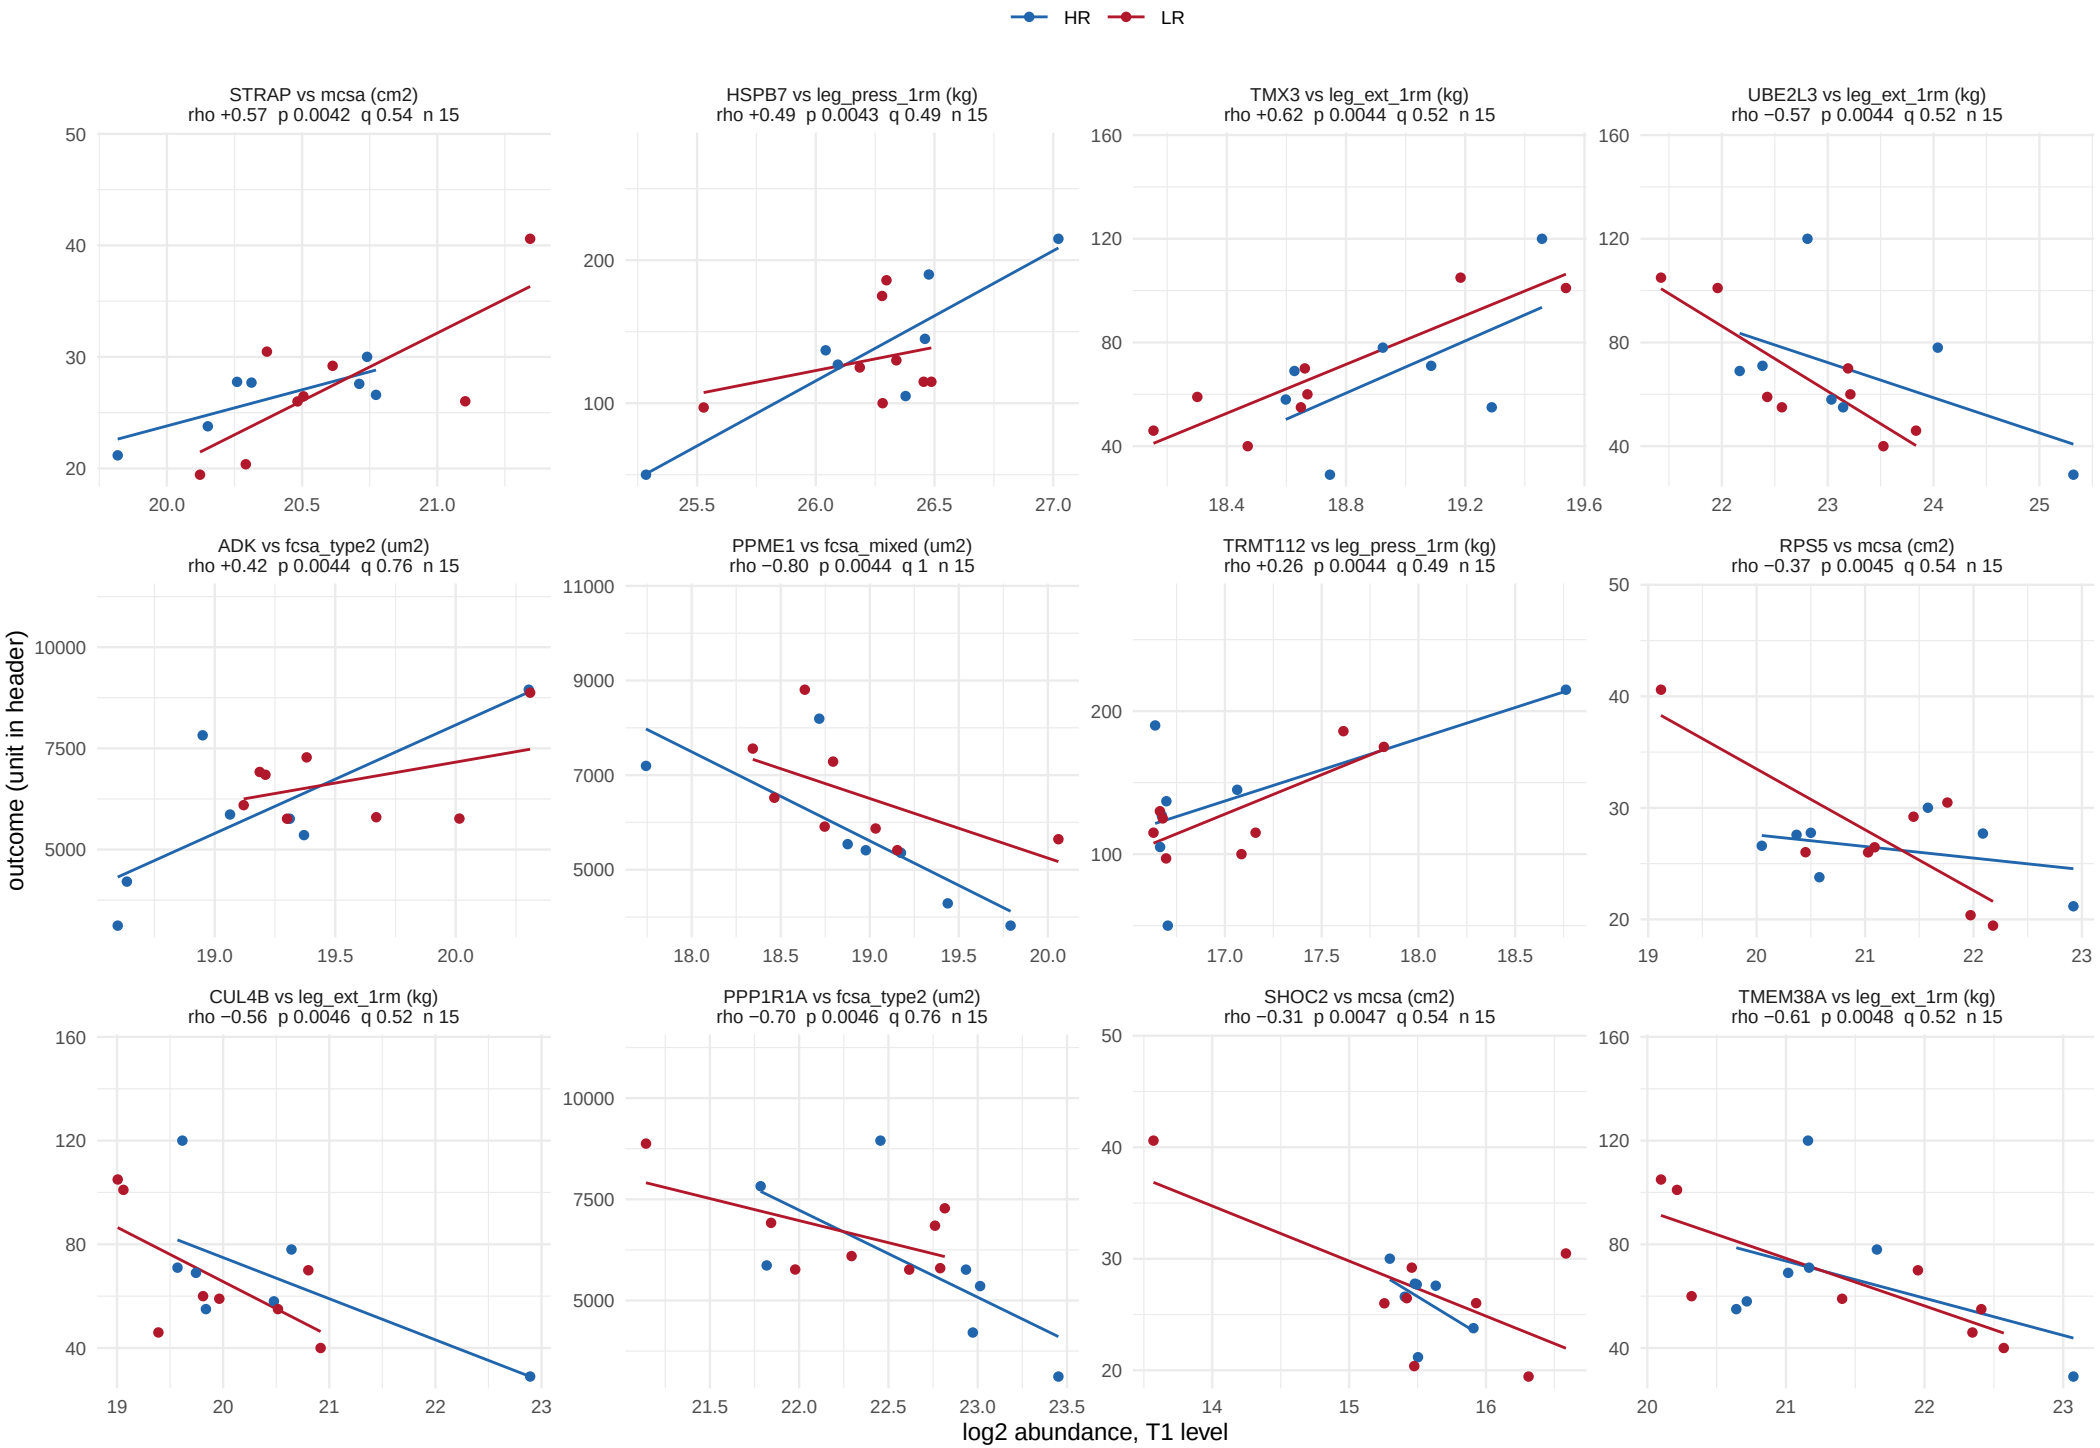

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


693 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 6 of 58.



One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


693 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 7 of 58.

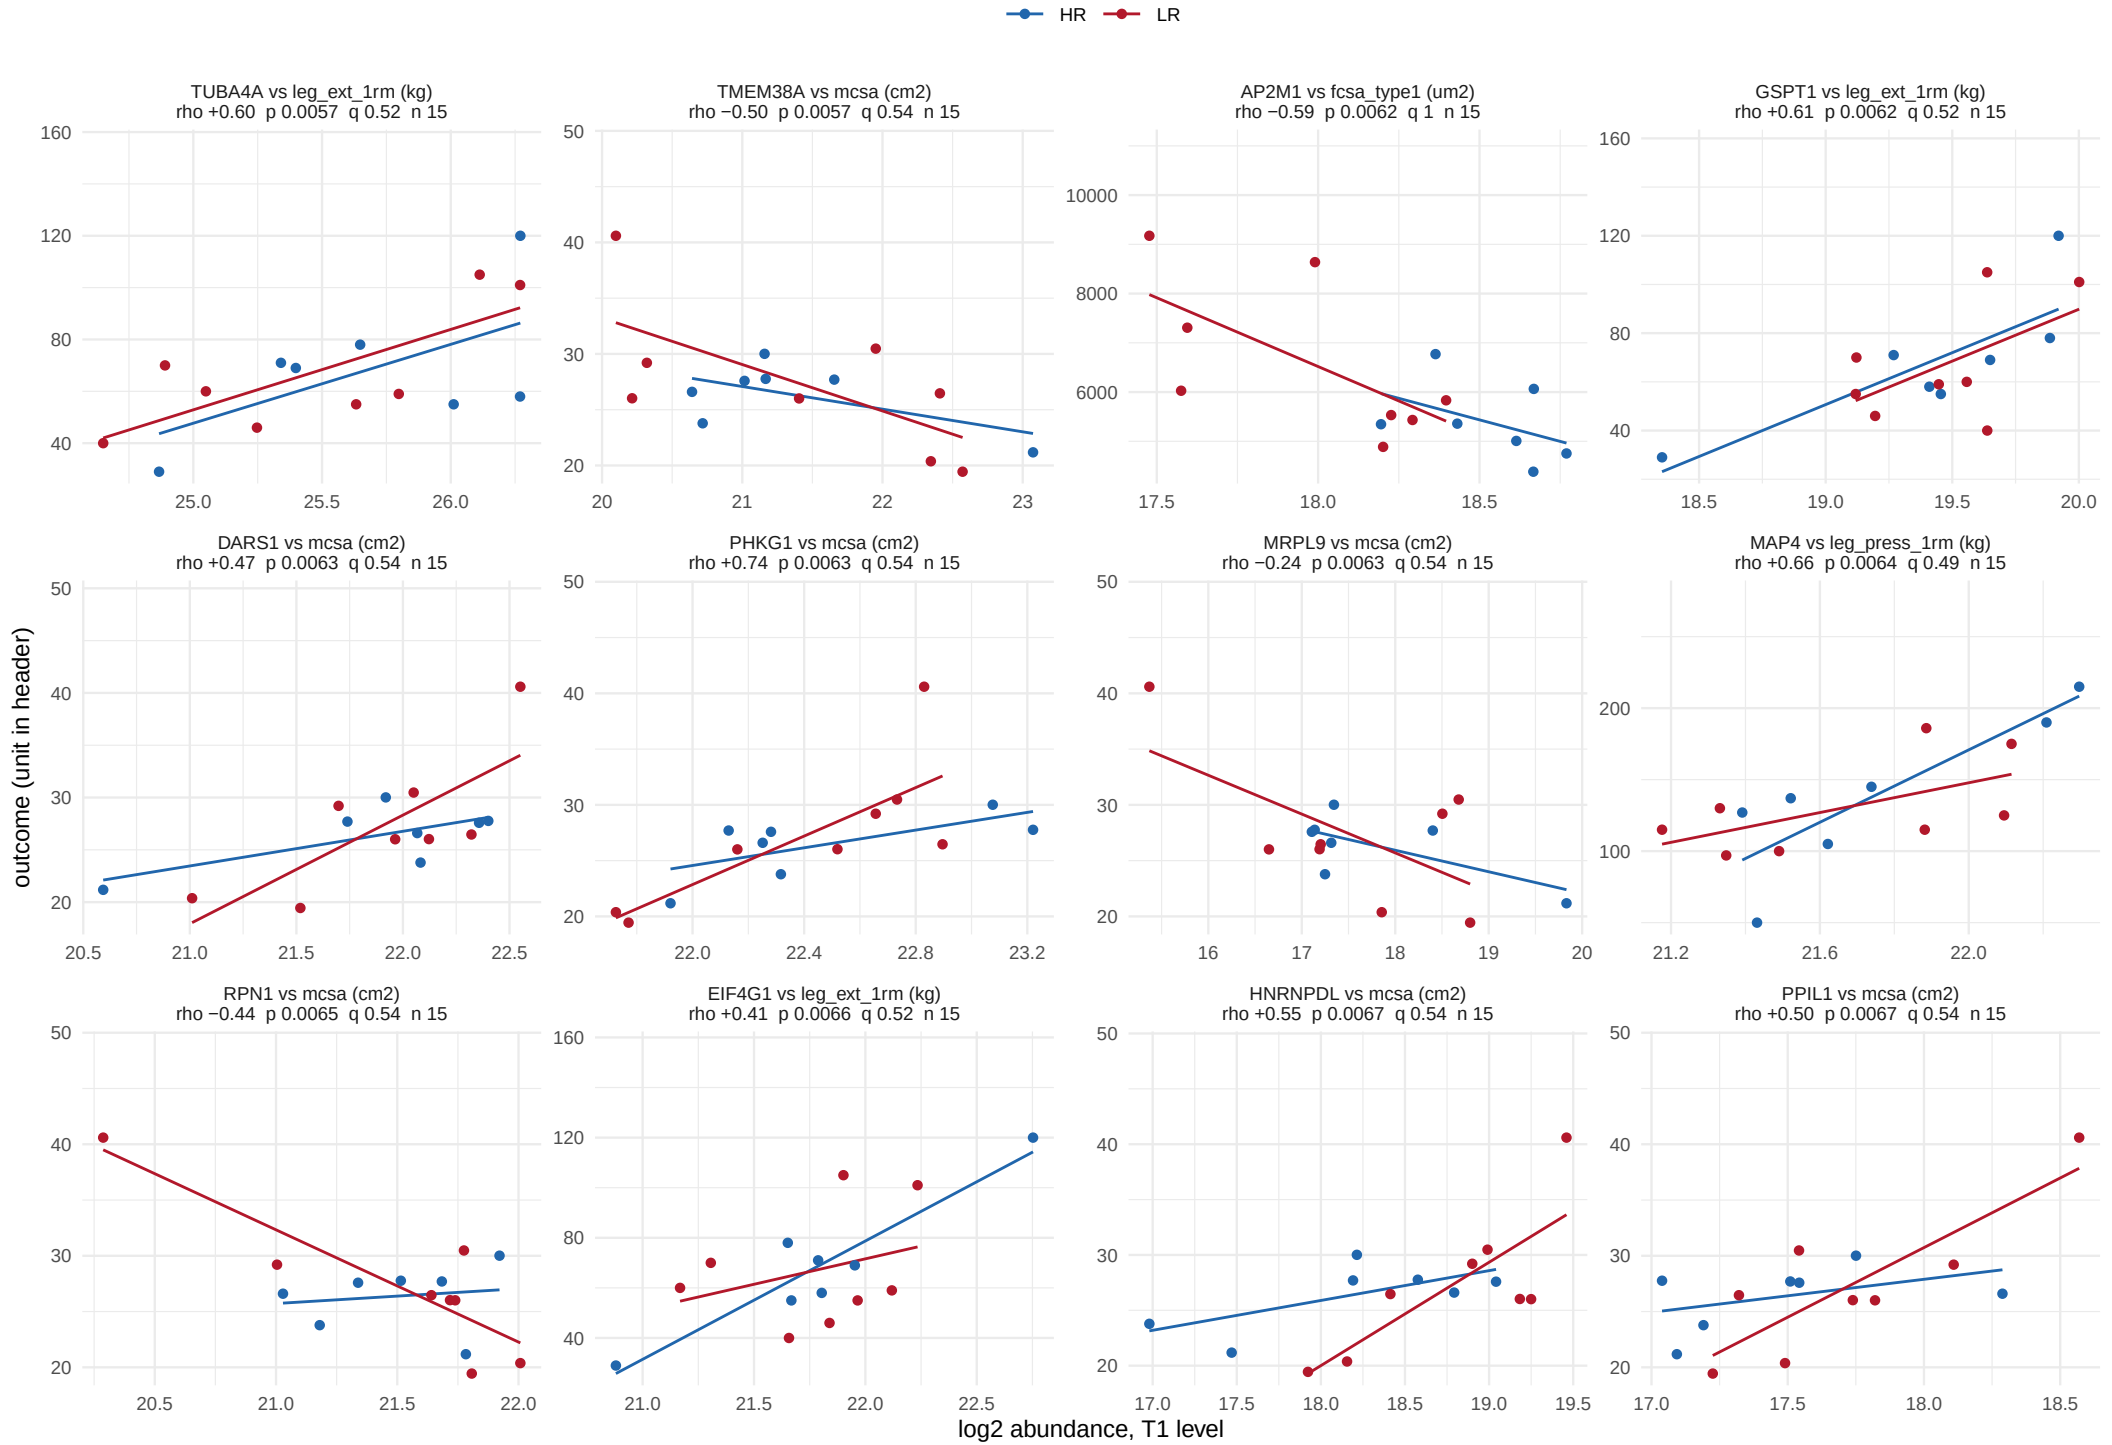

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


693 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 8 of 58.

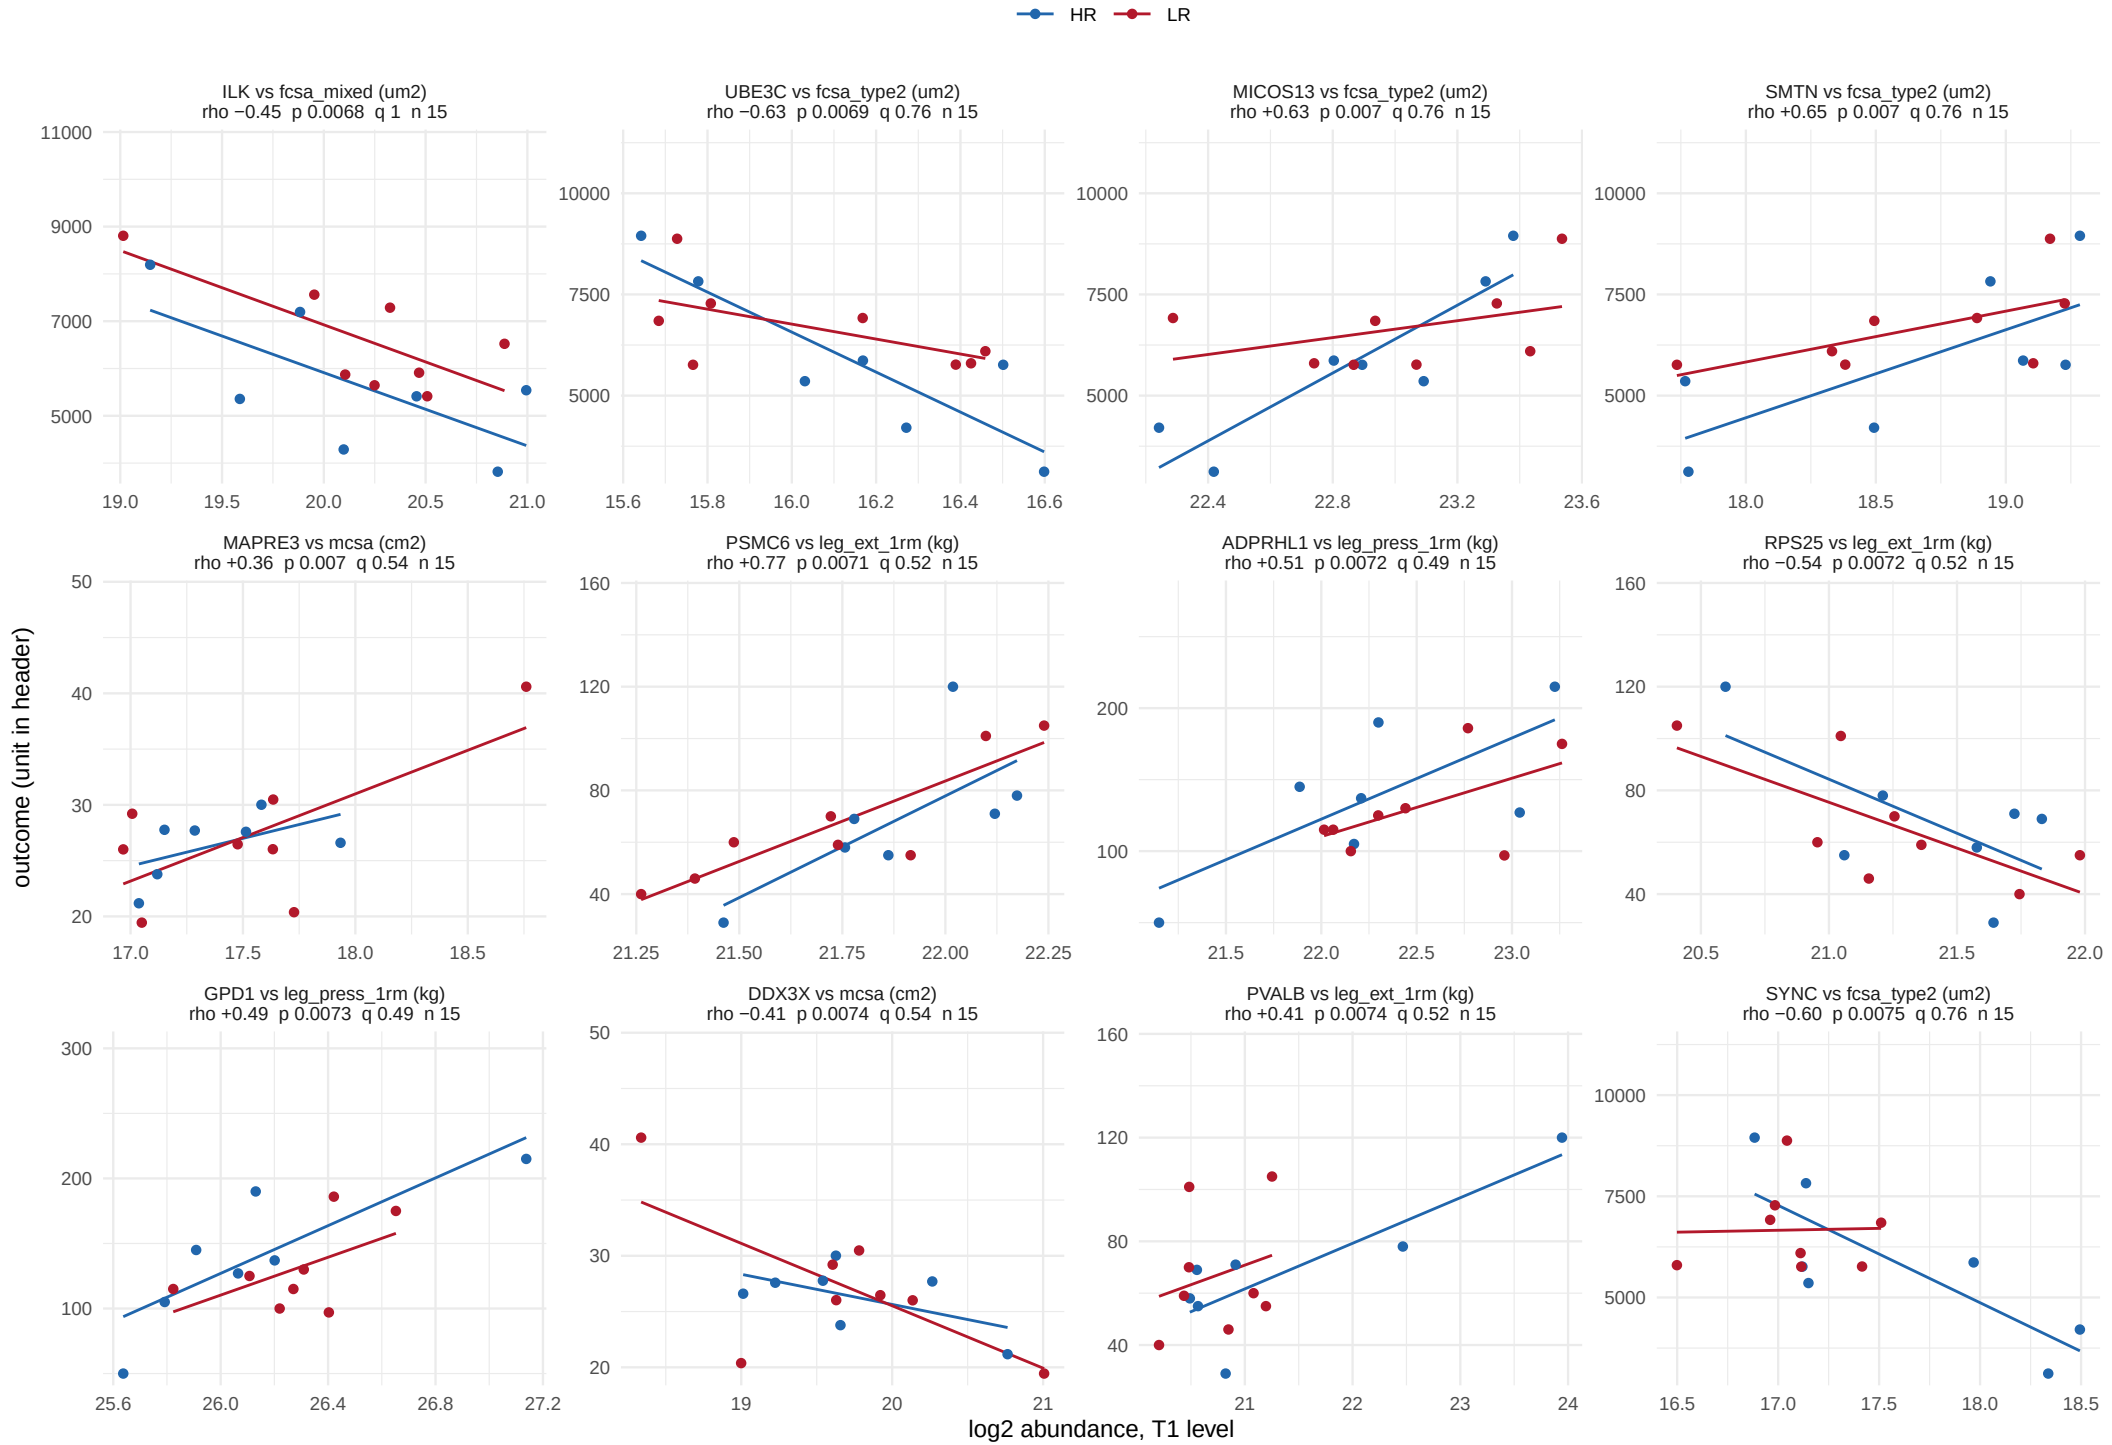

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


693 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 9 of 58.

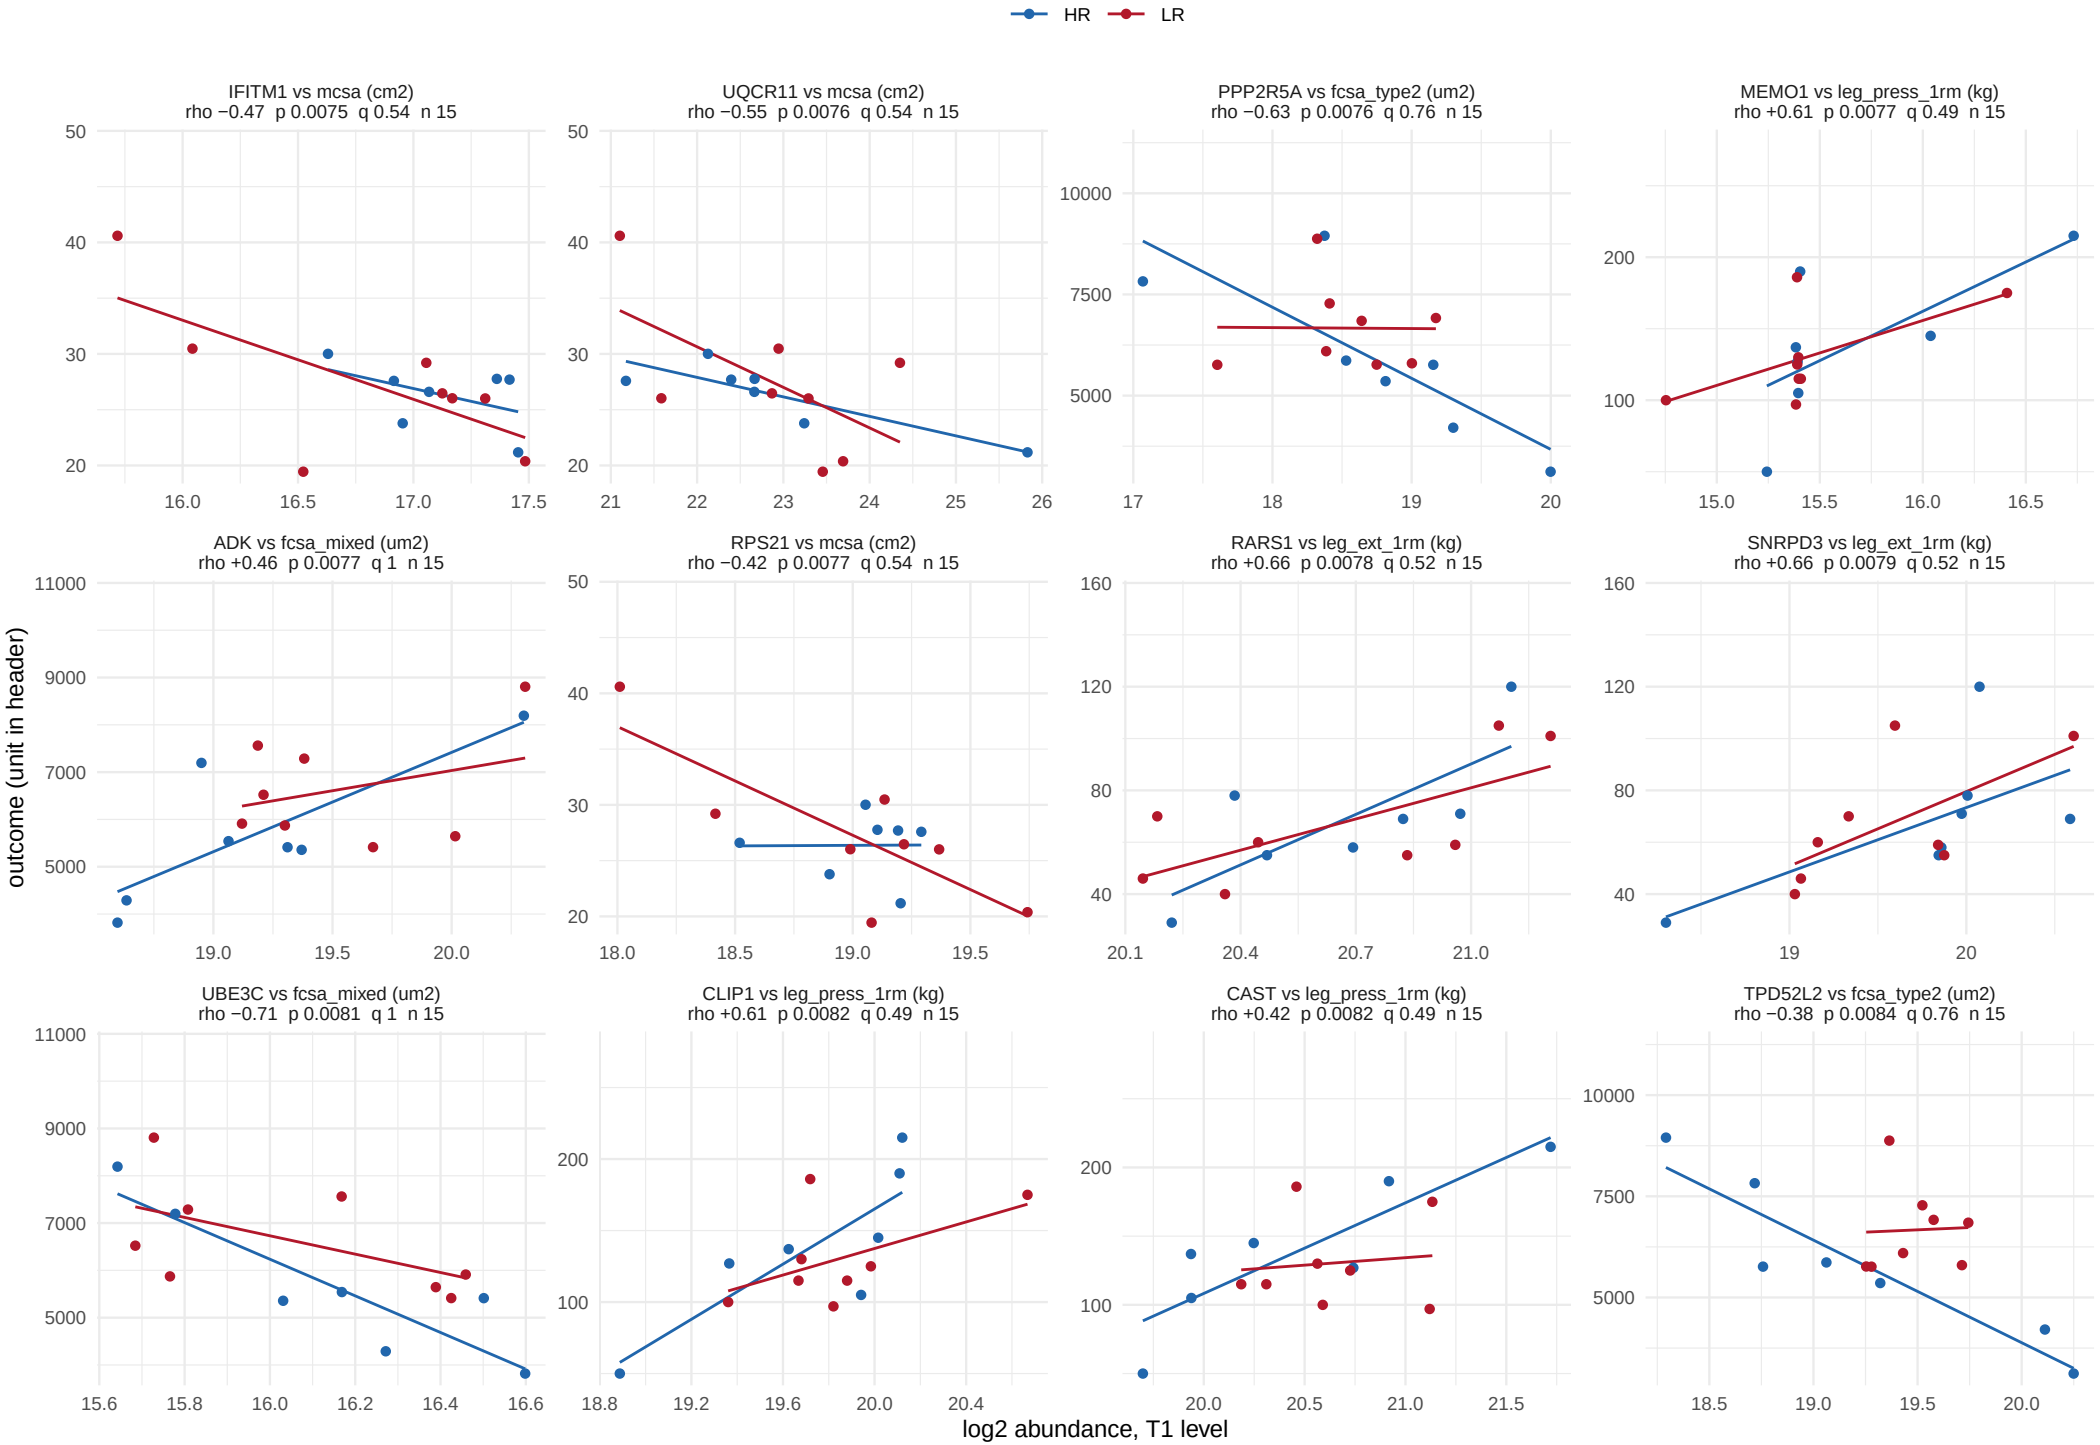

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


693 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 10 of 58.

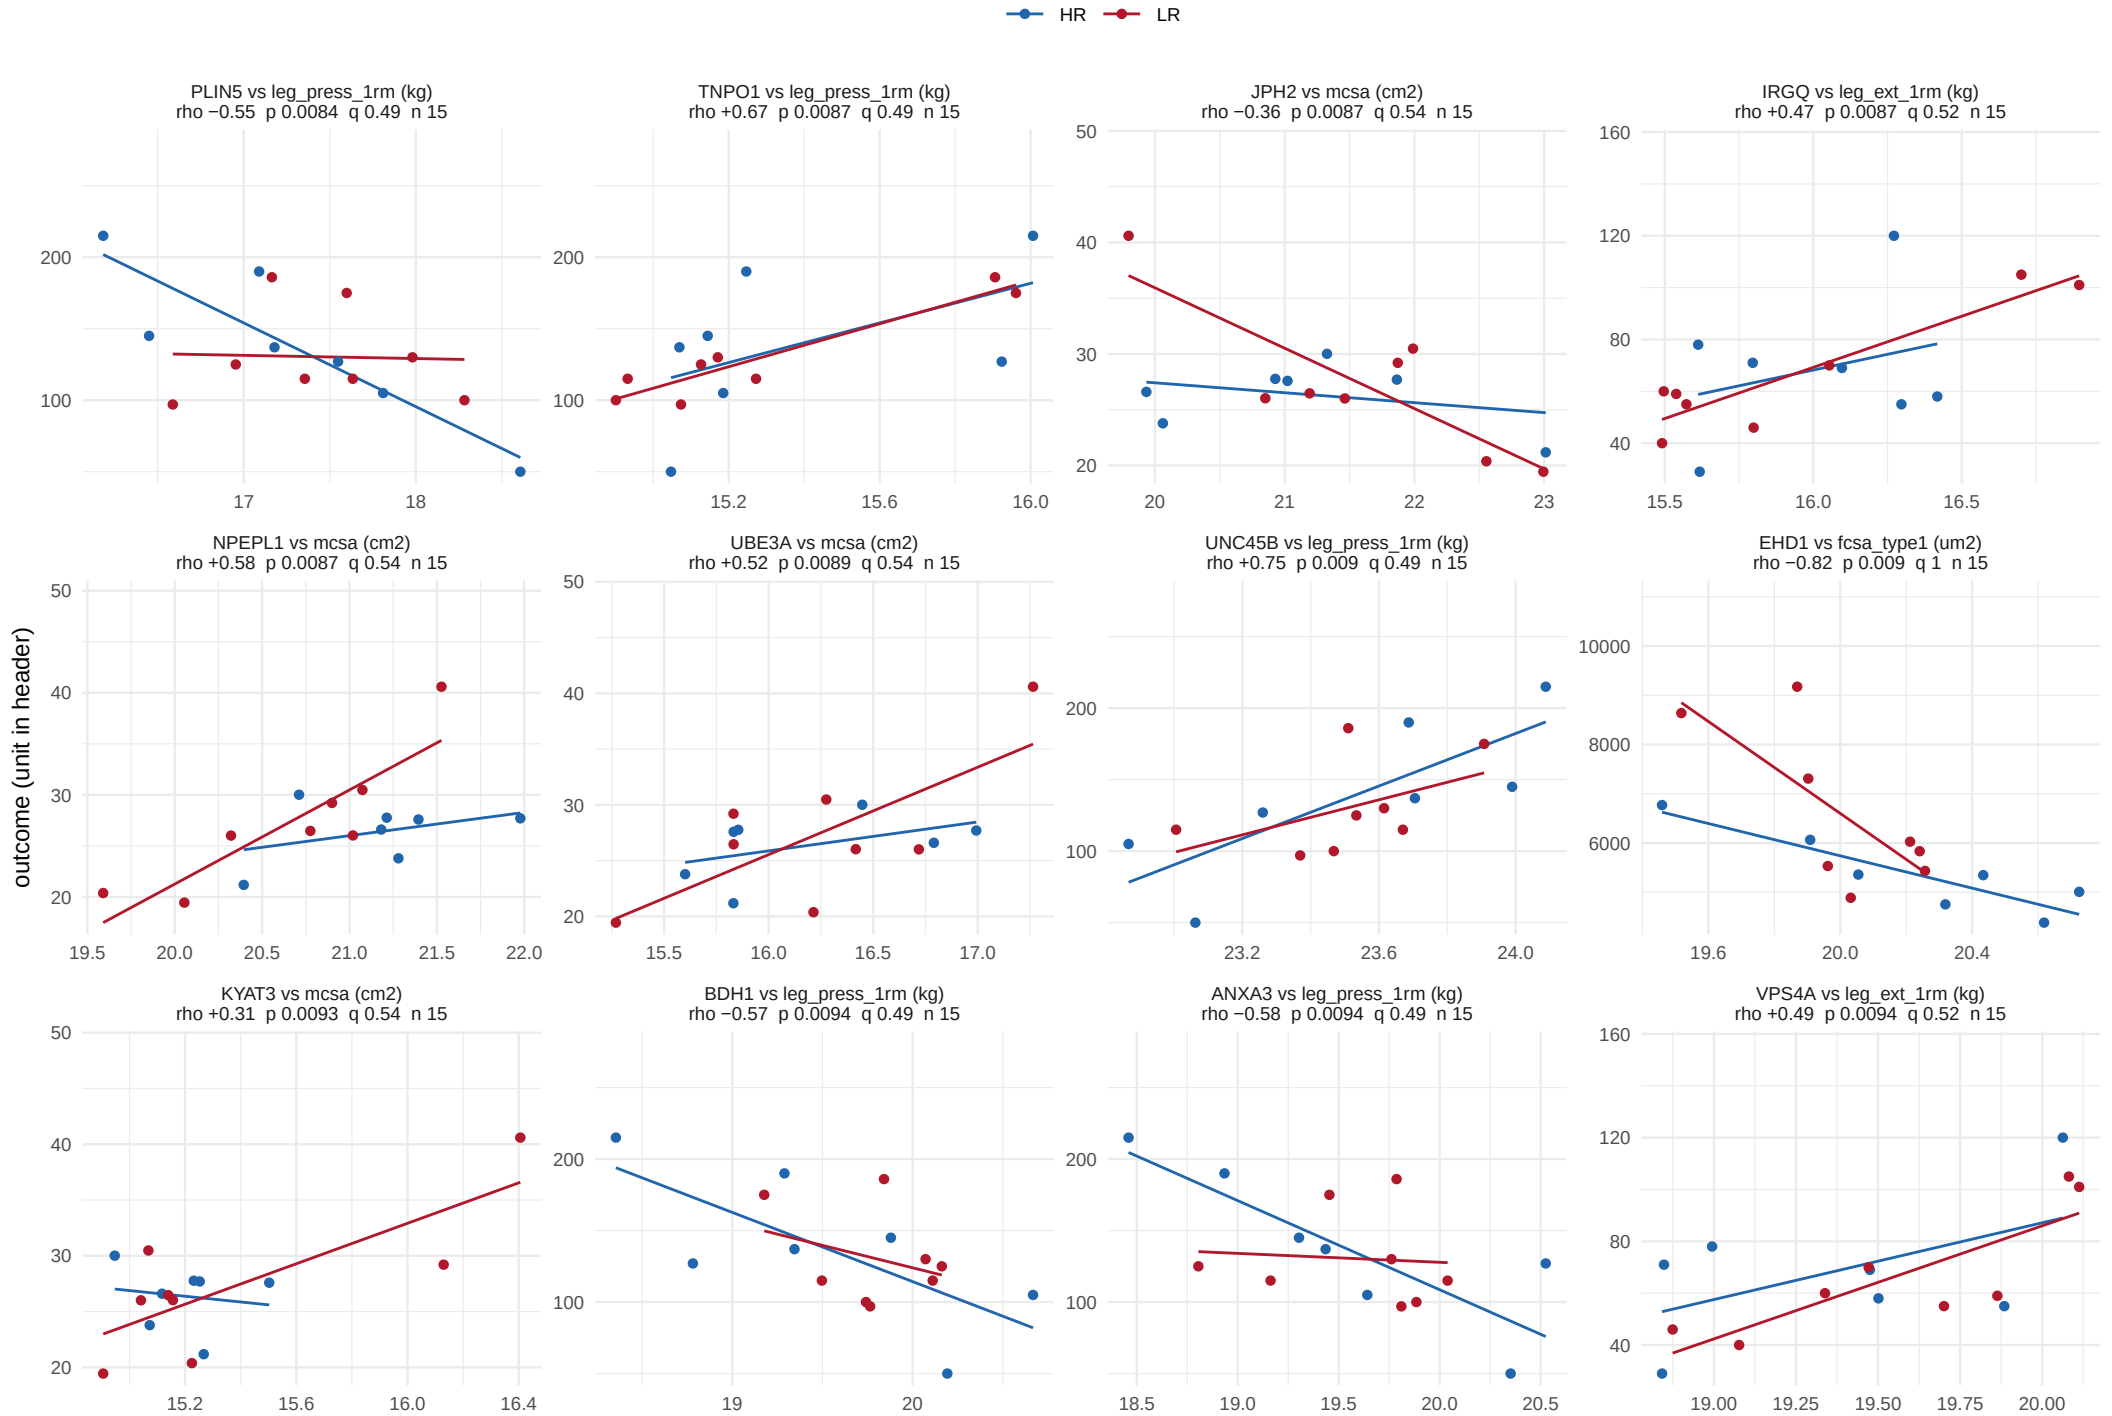

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


693 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 11 of 58.

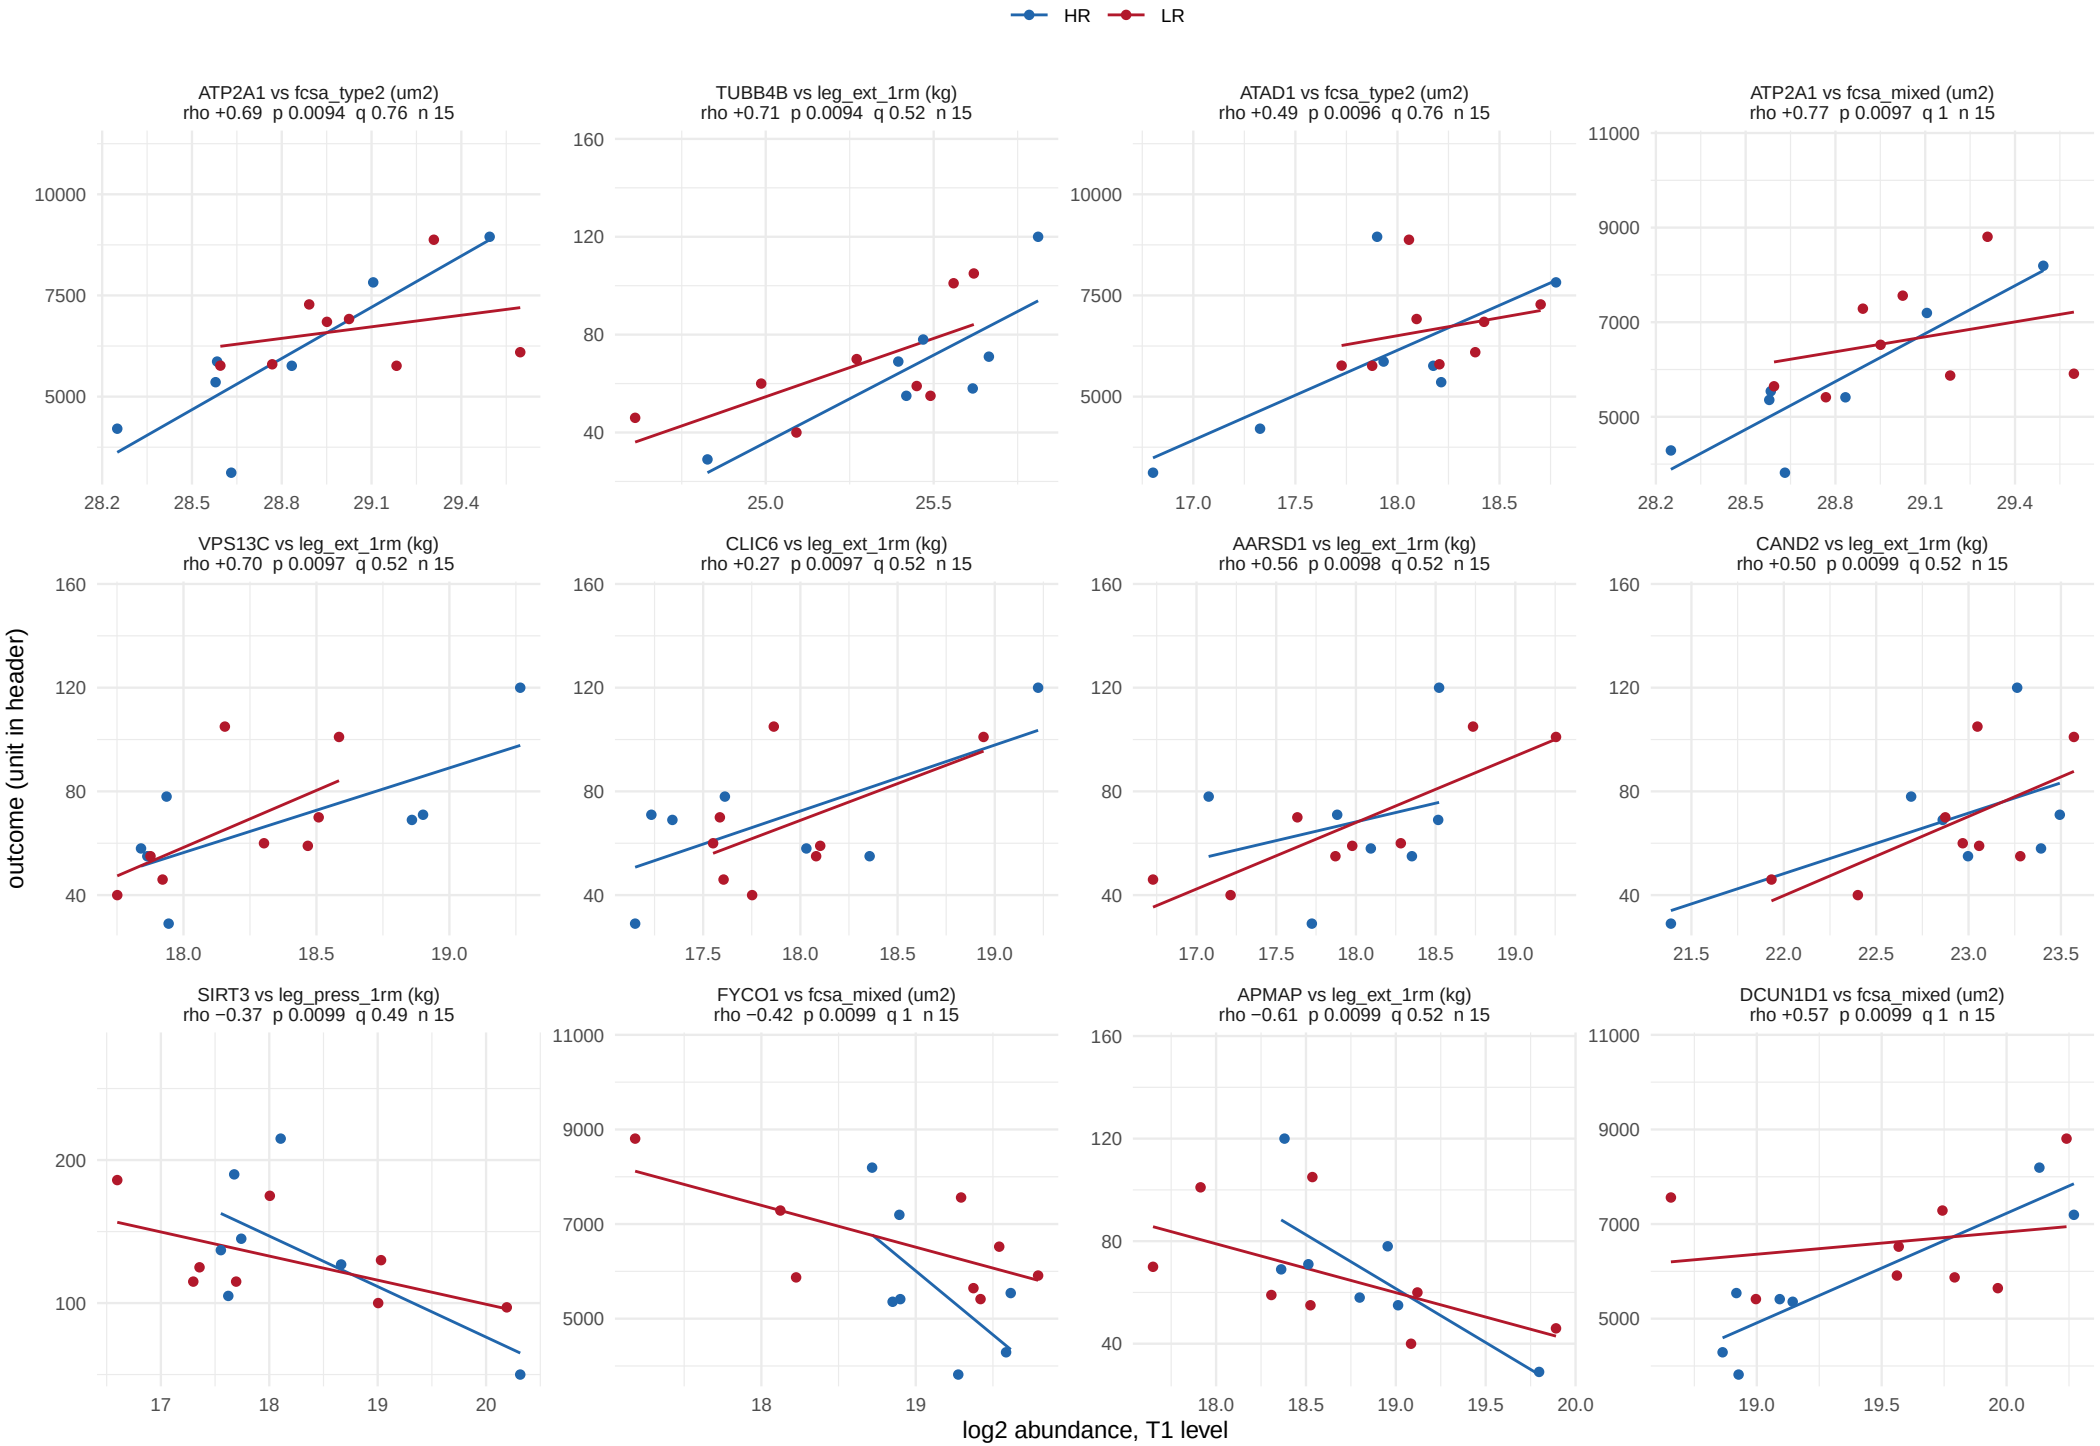

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


693 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 12 of 58.

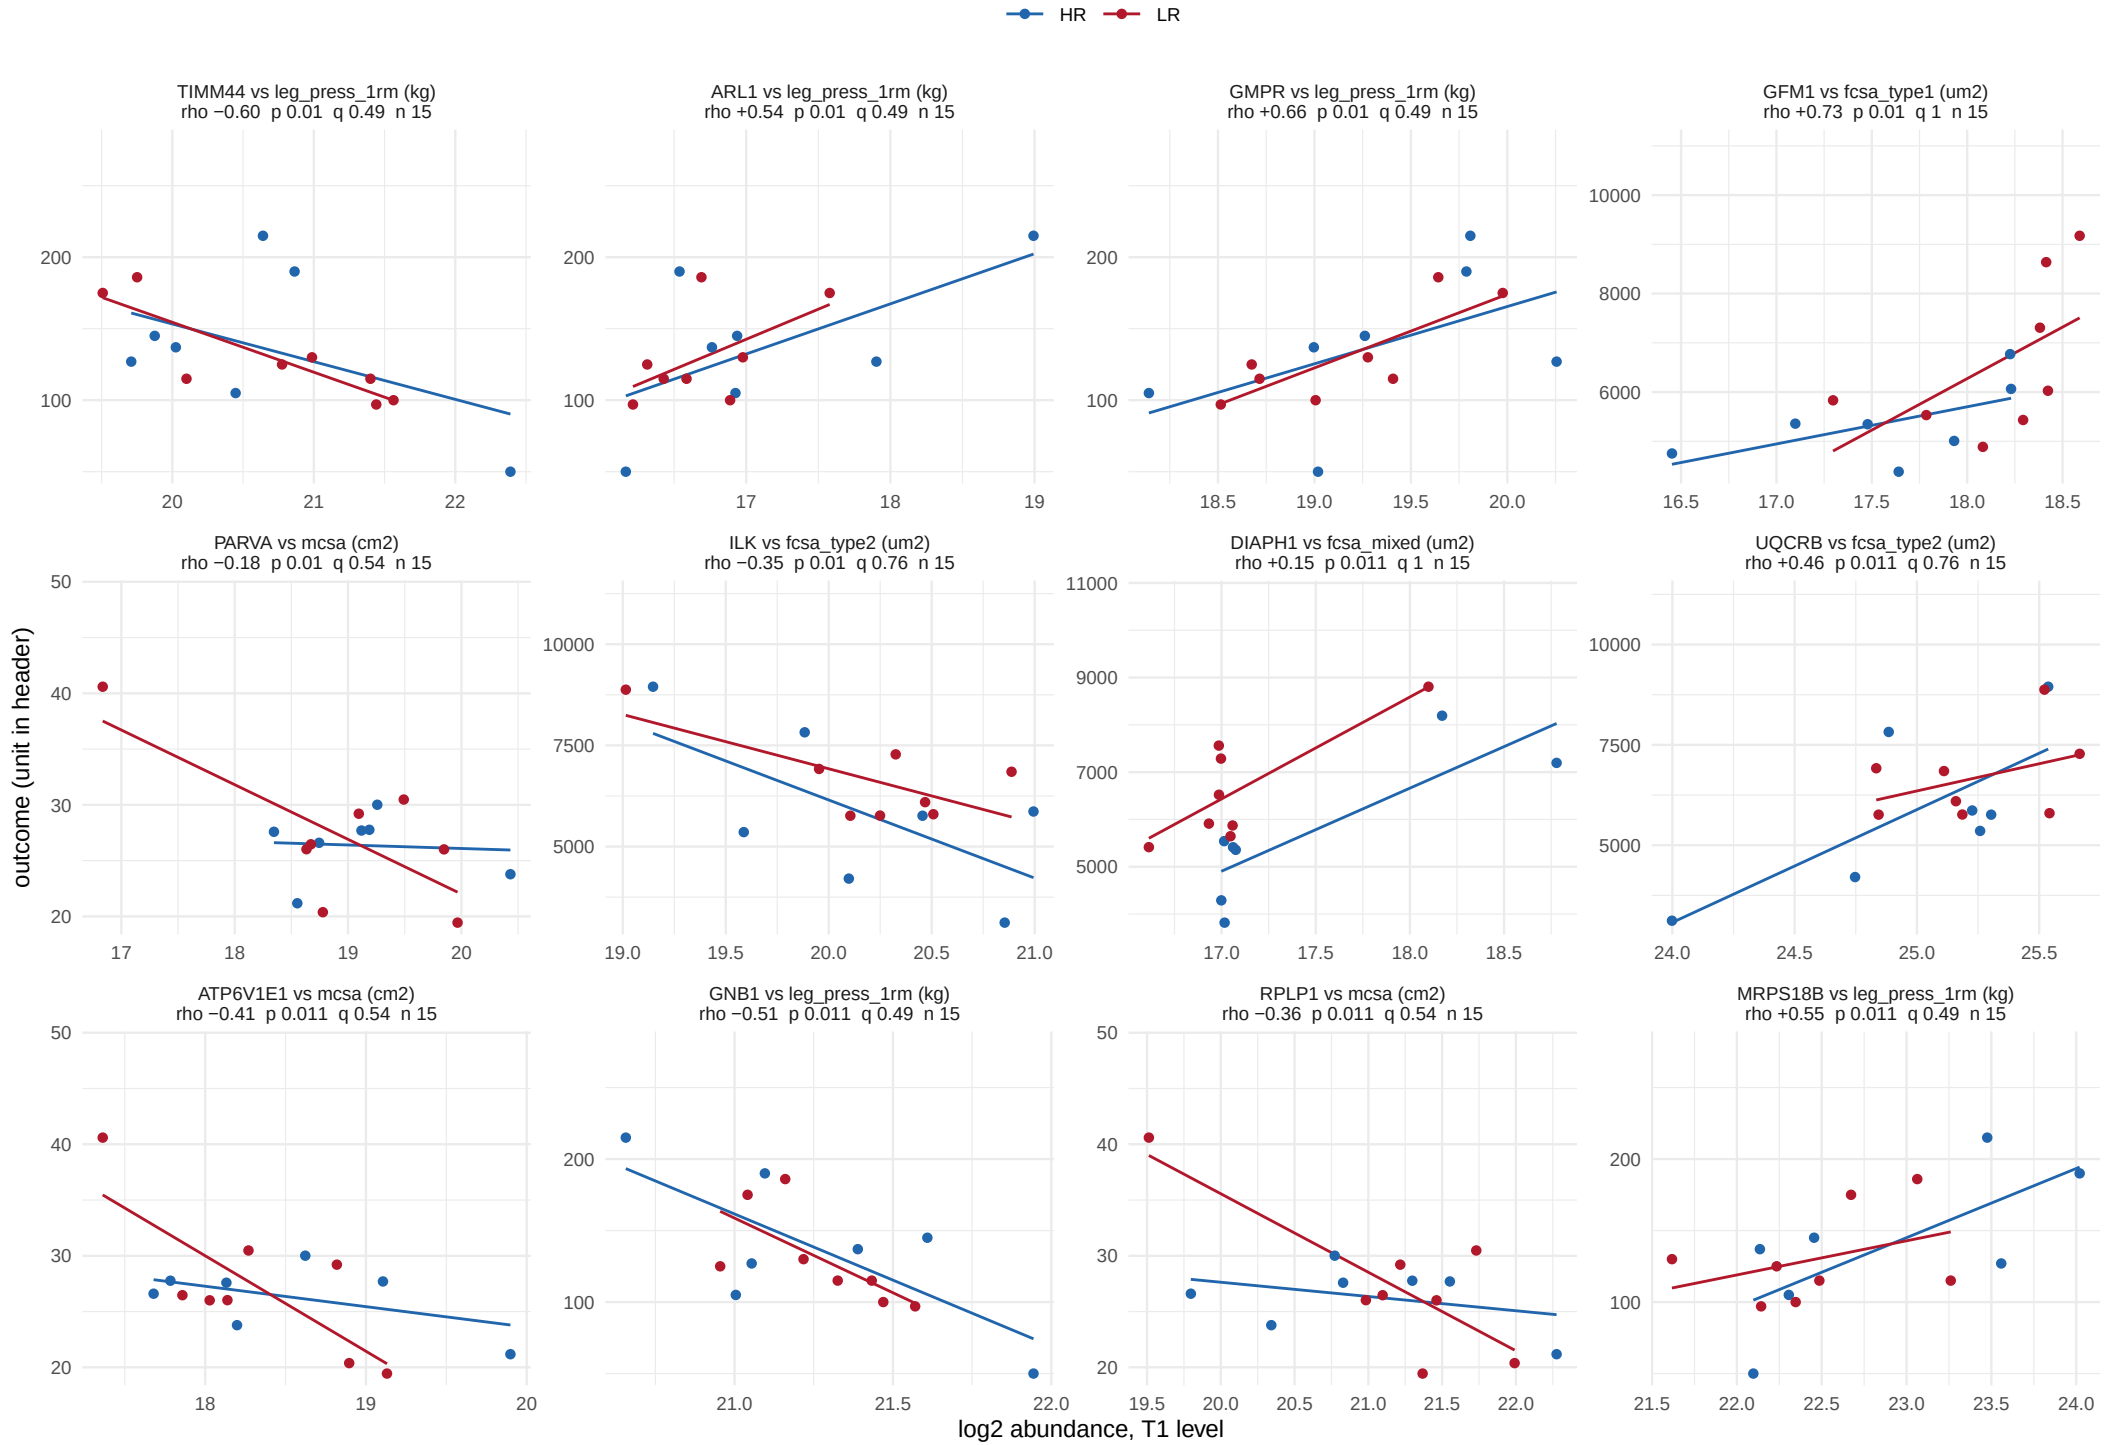

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window

693 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 13 of 58.

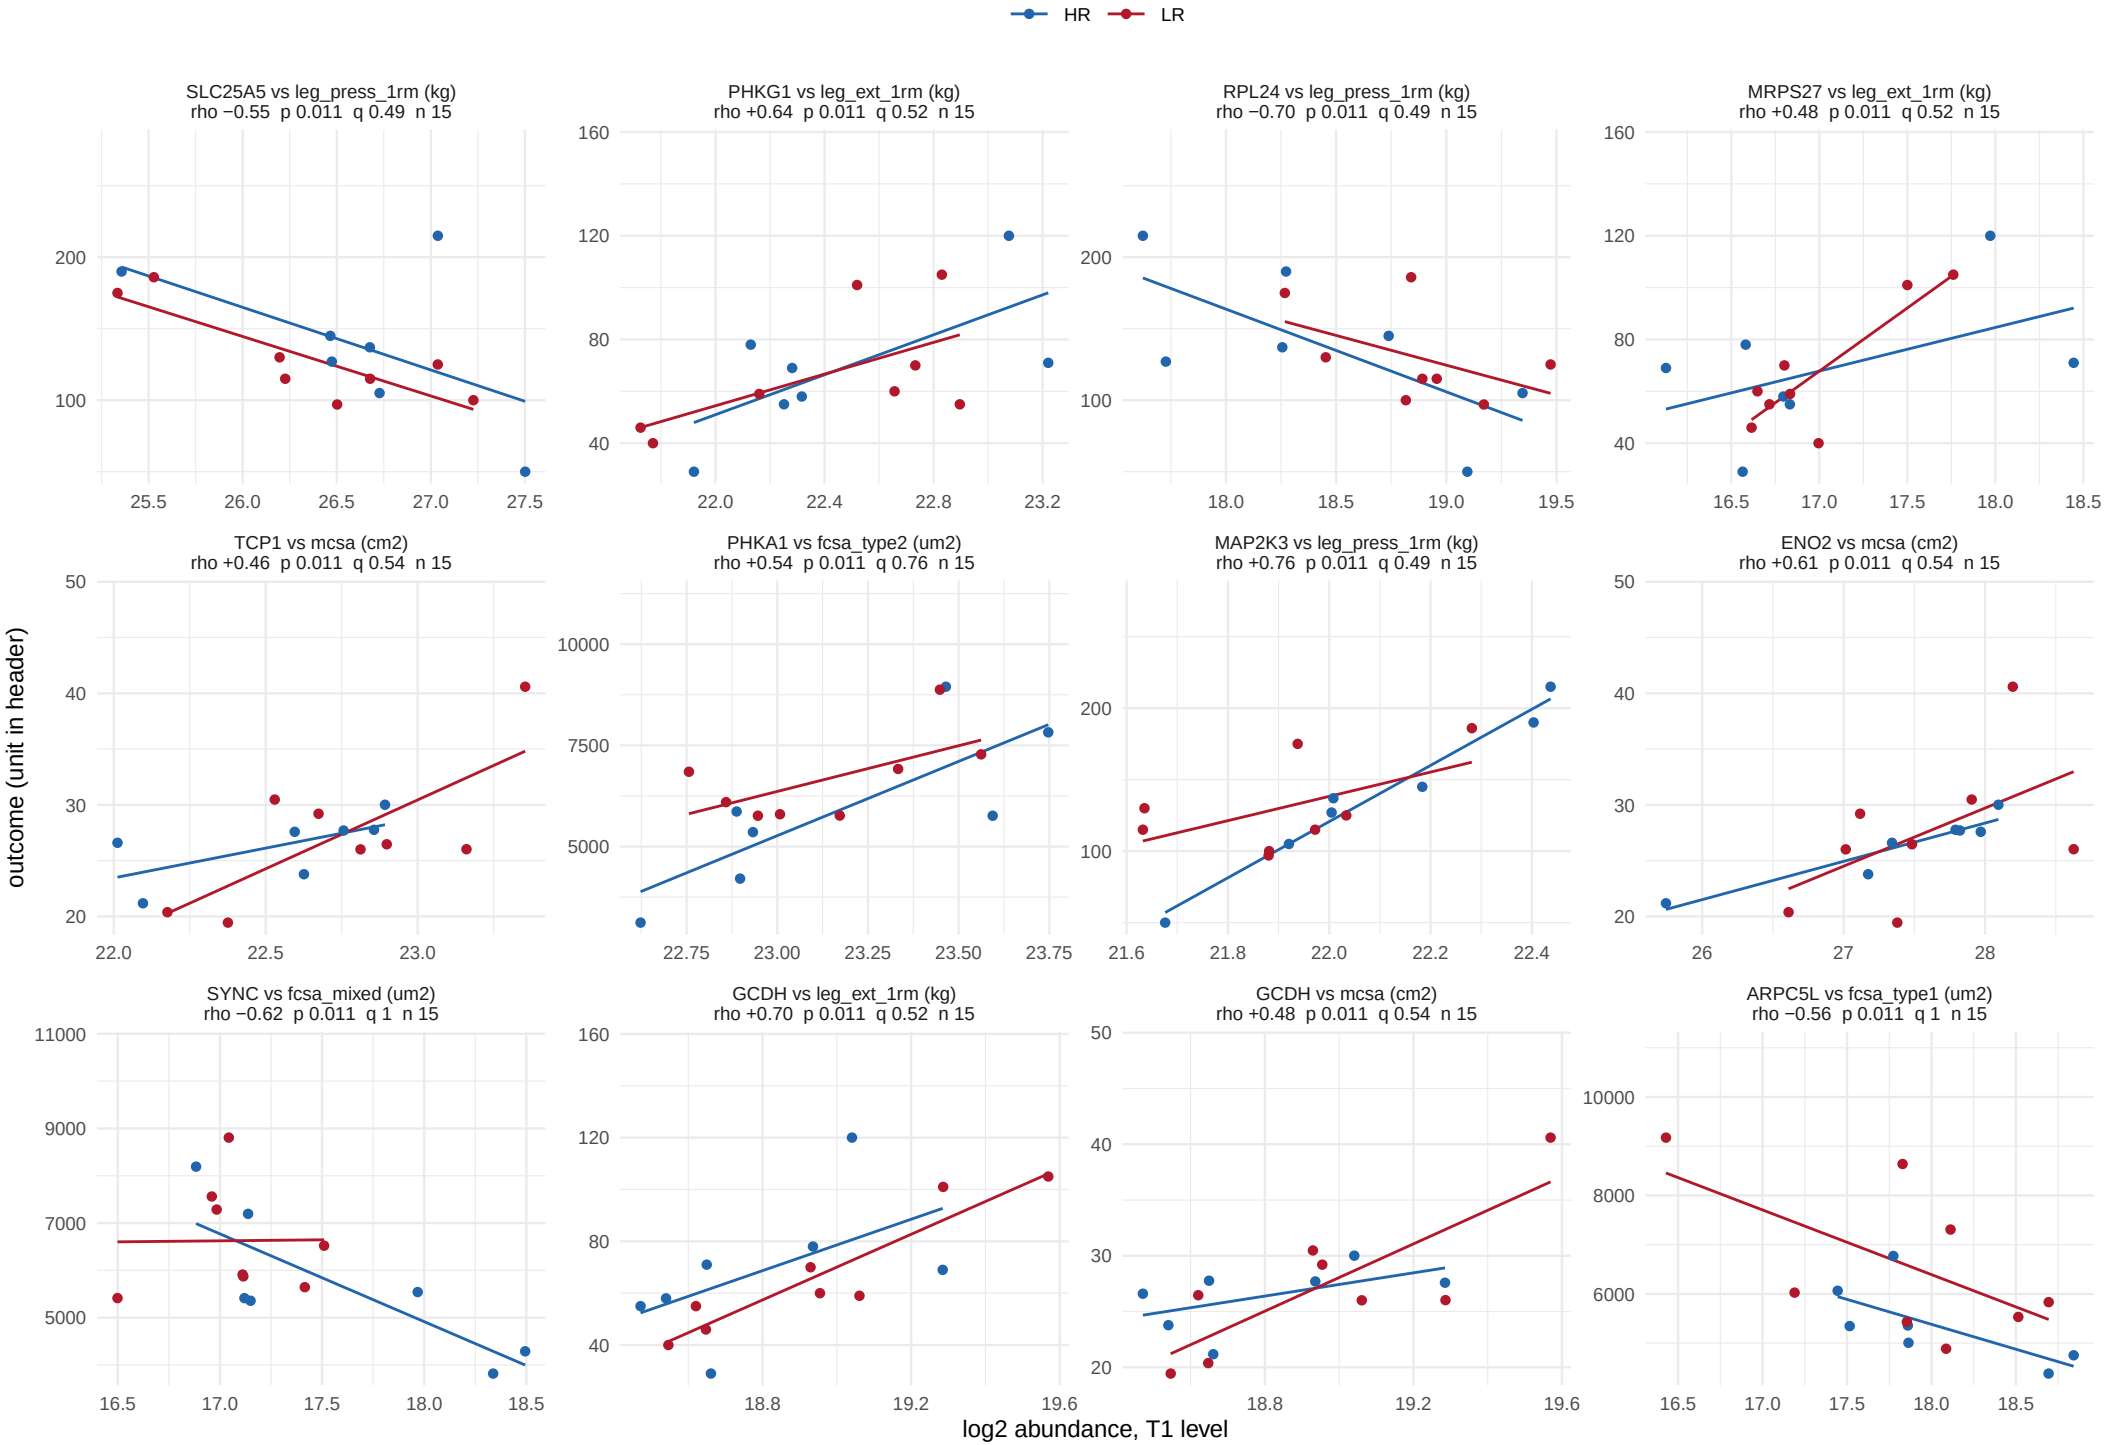

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


693 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 14 of 58.



One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


693 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 15 of 58.

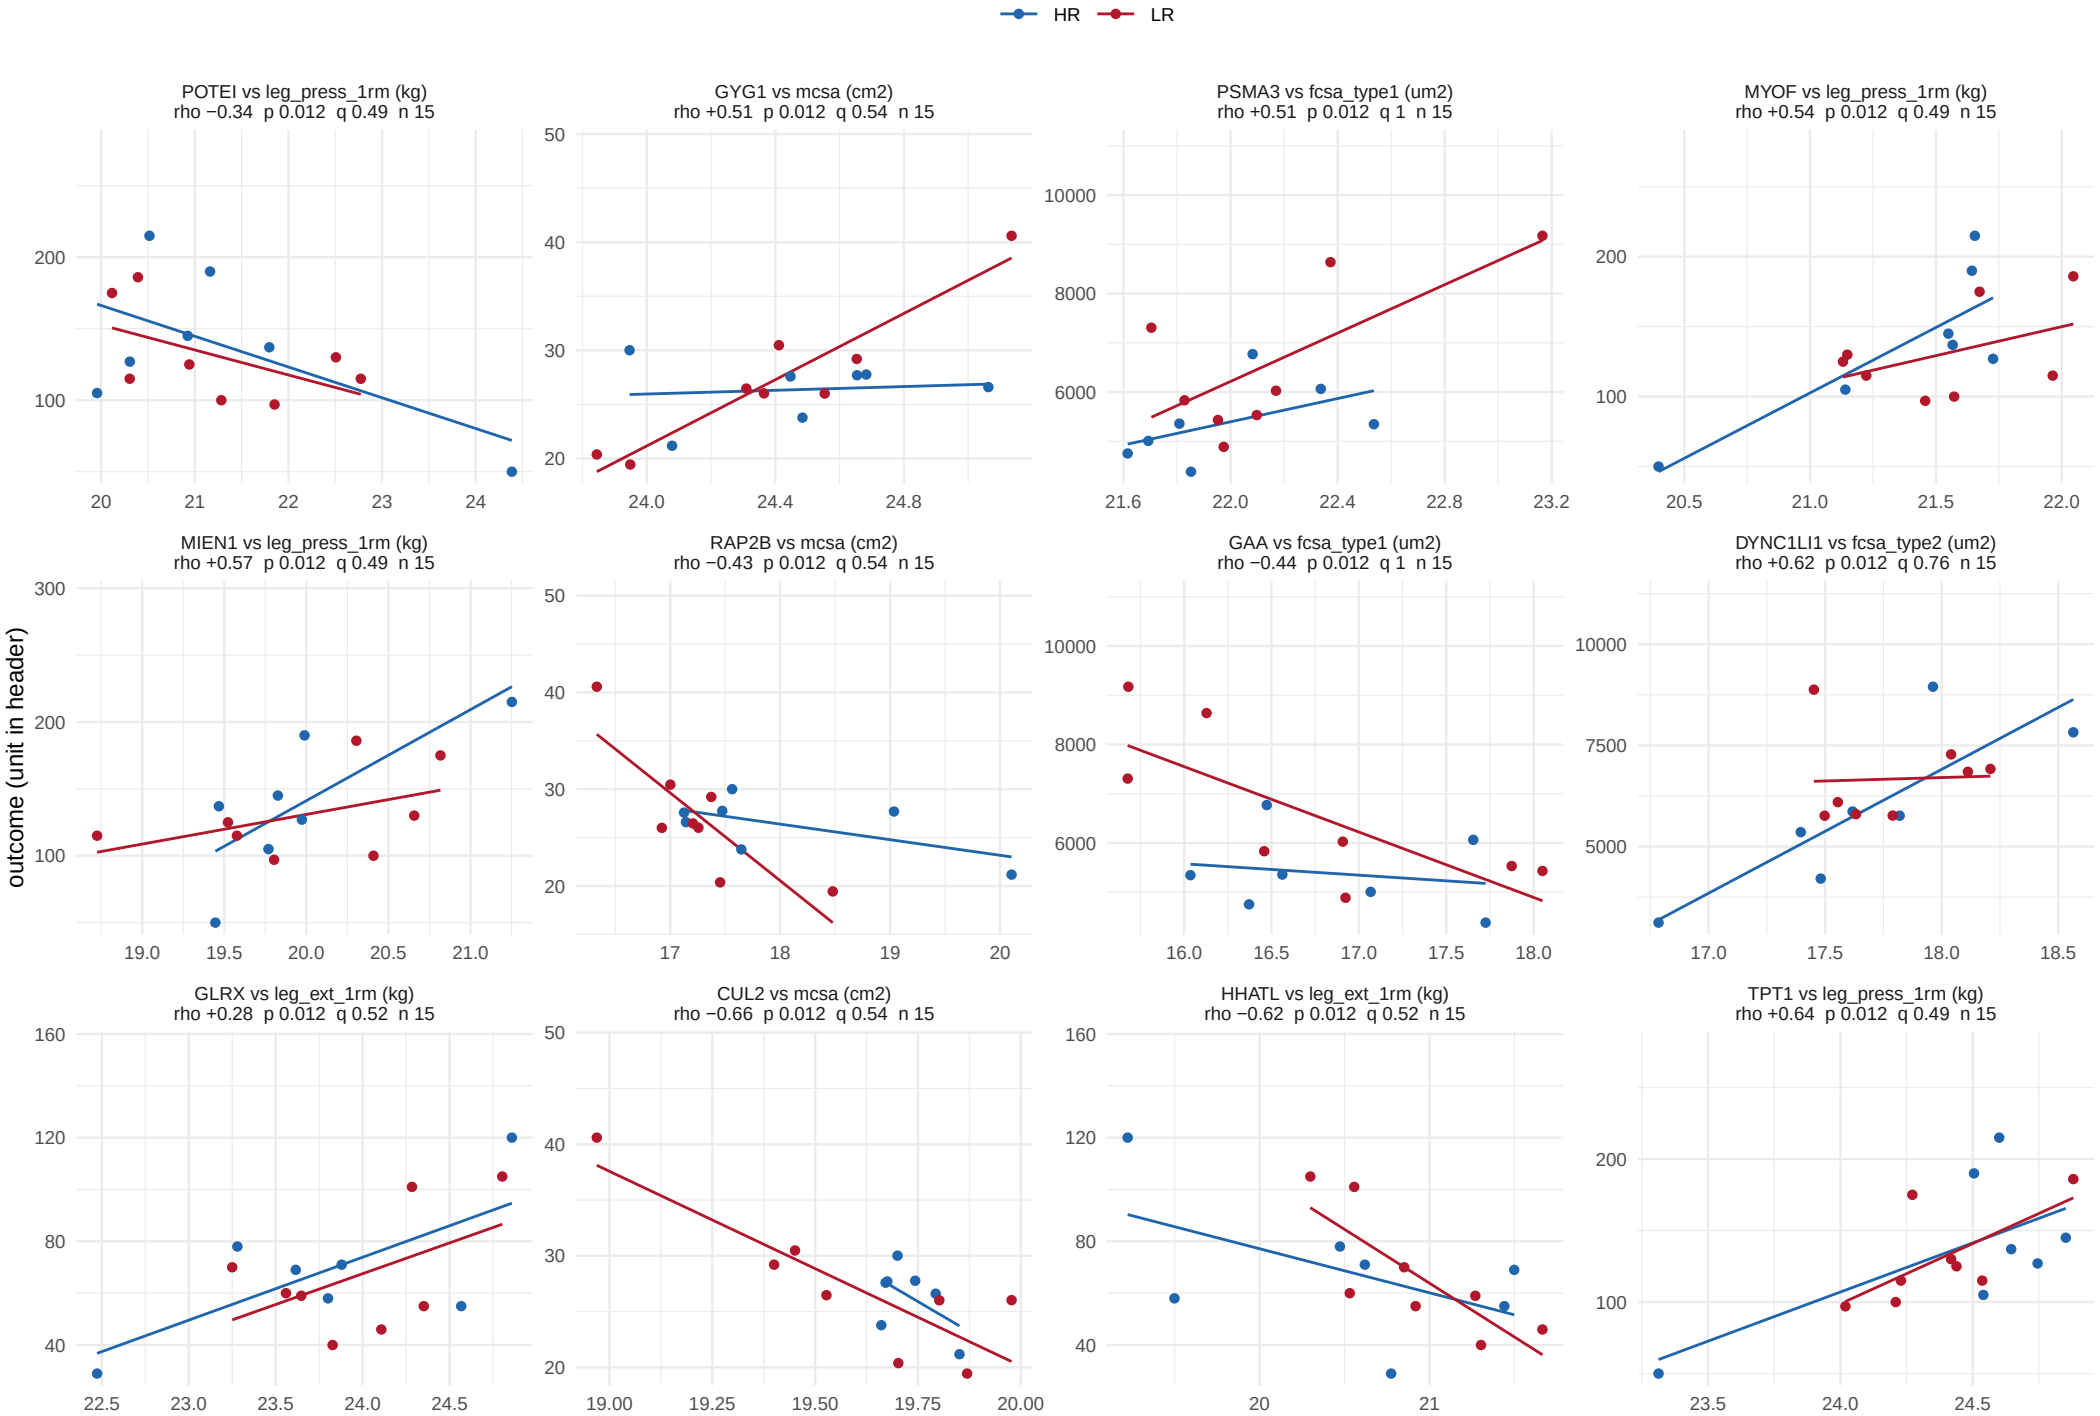

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


693 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 16 of 58.

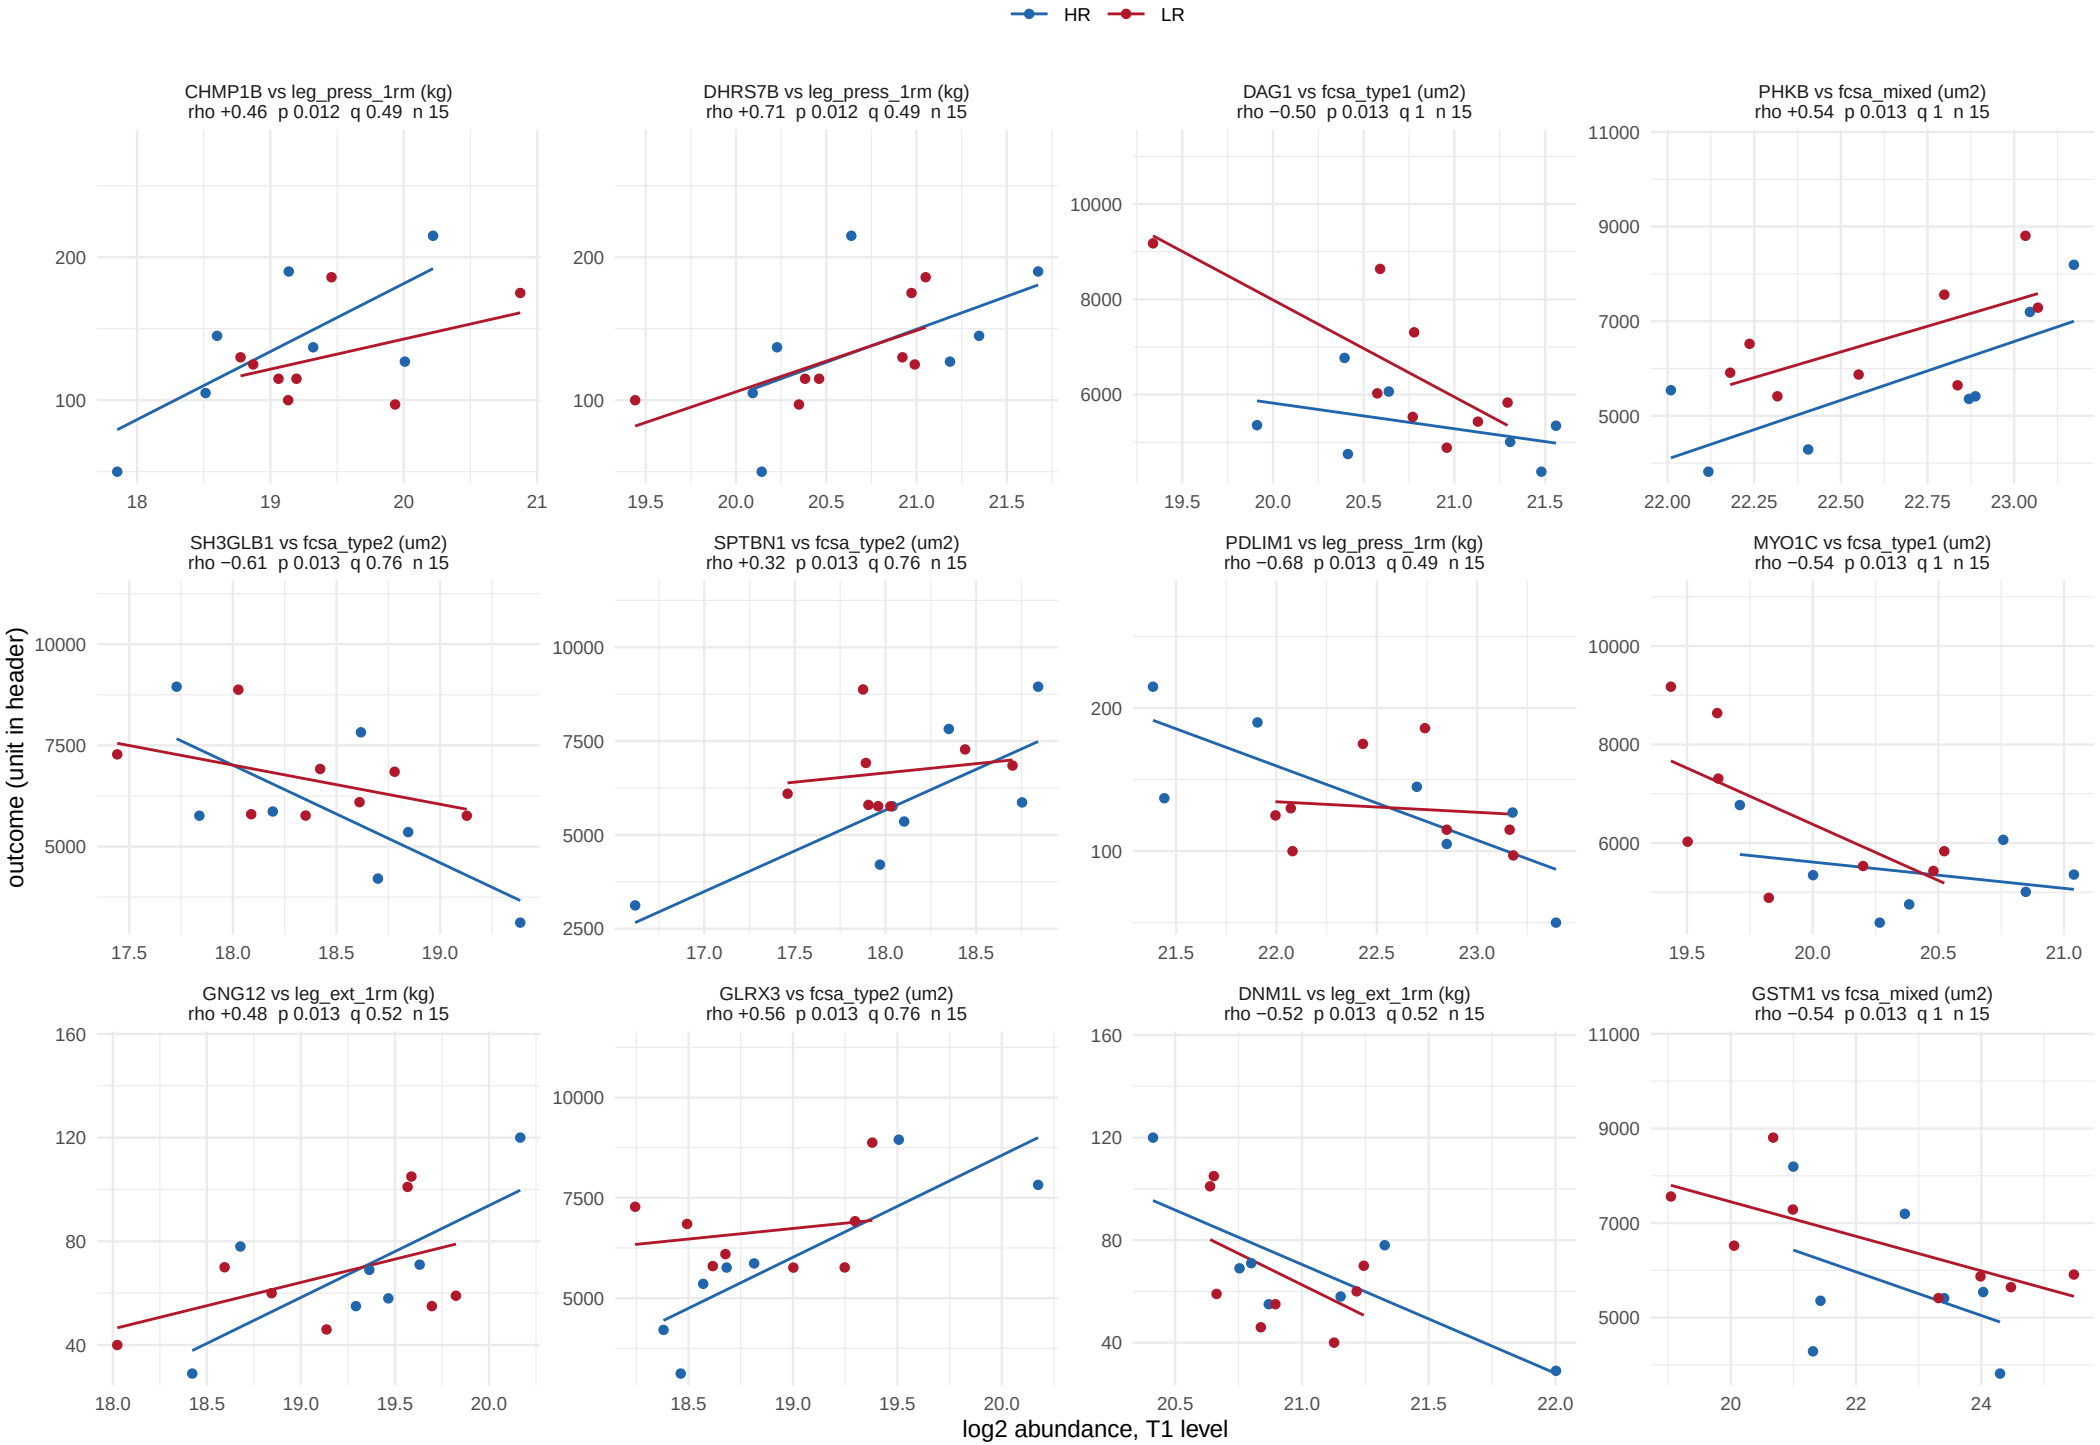

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


693 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 17 of 58.

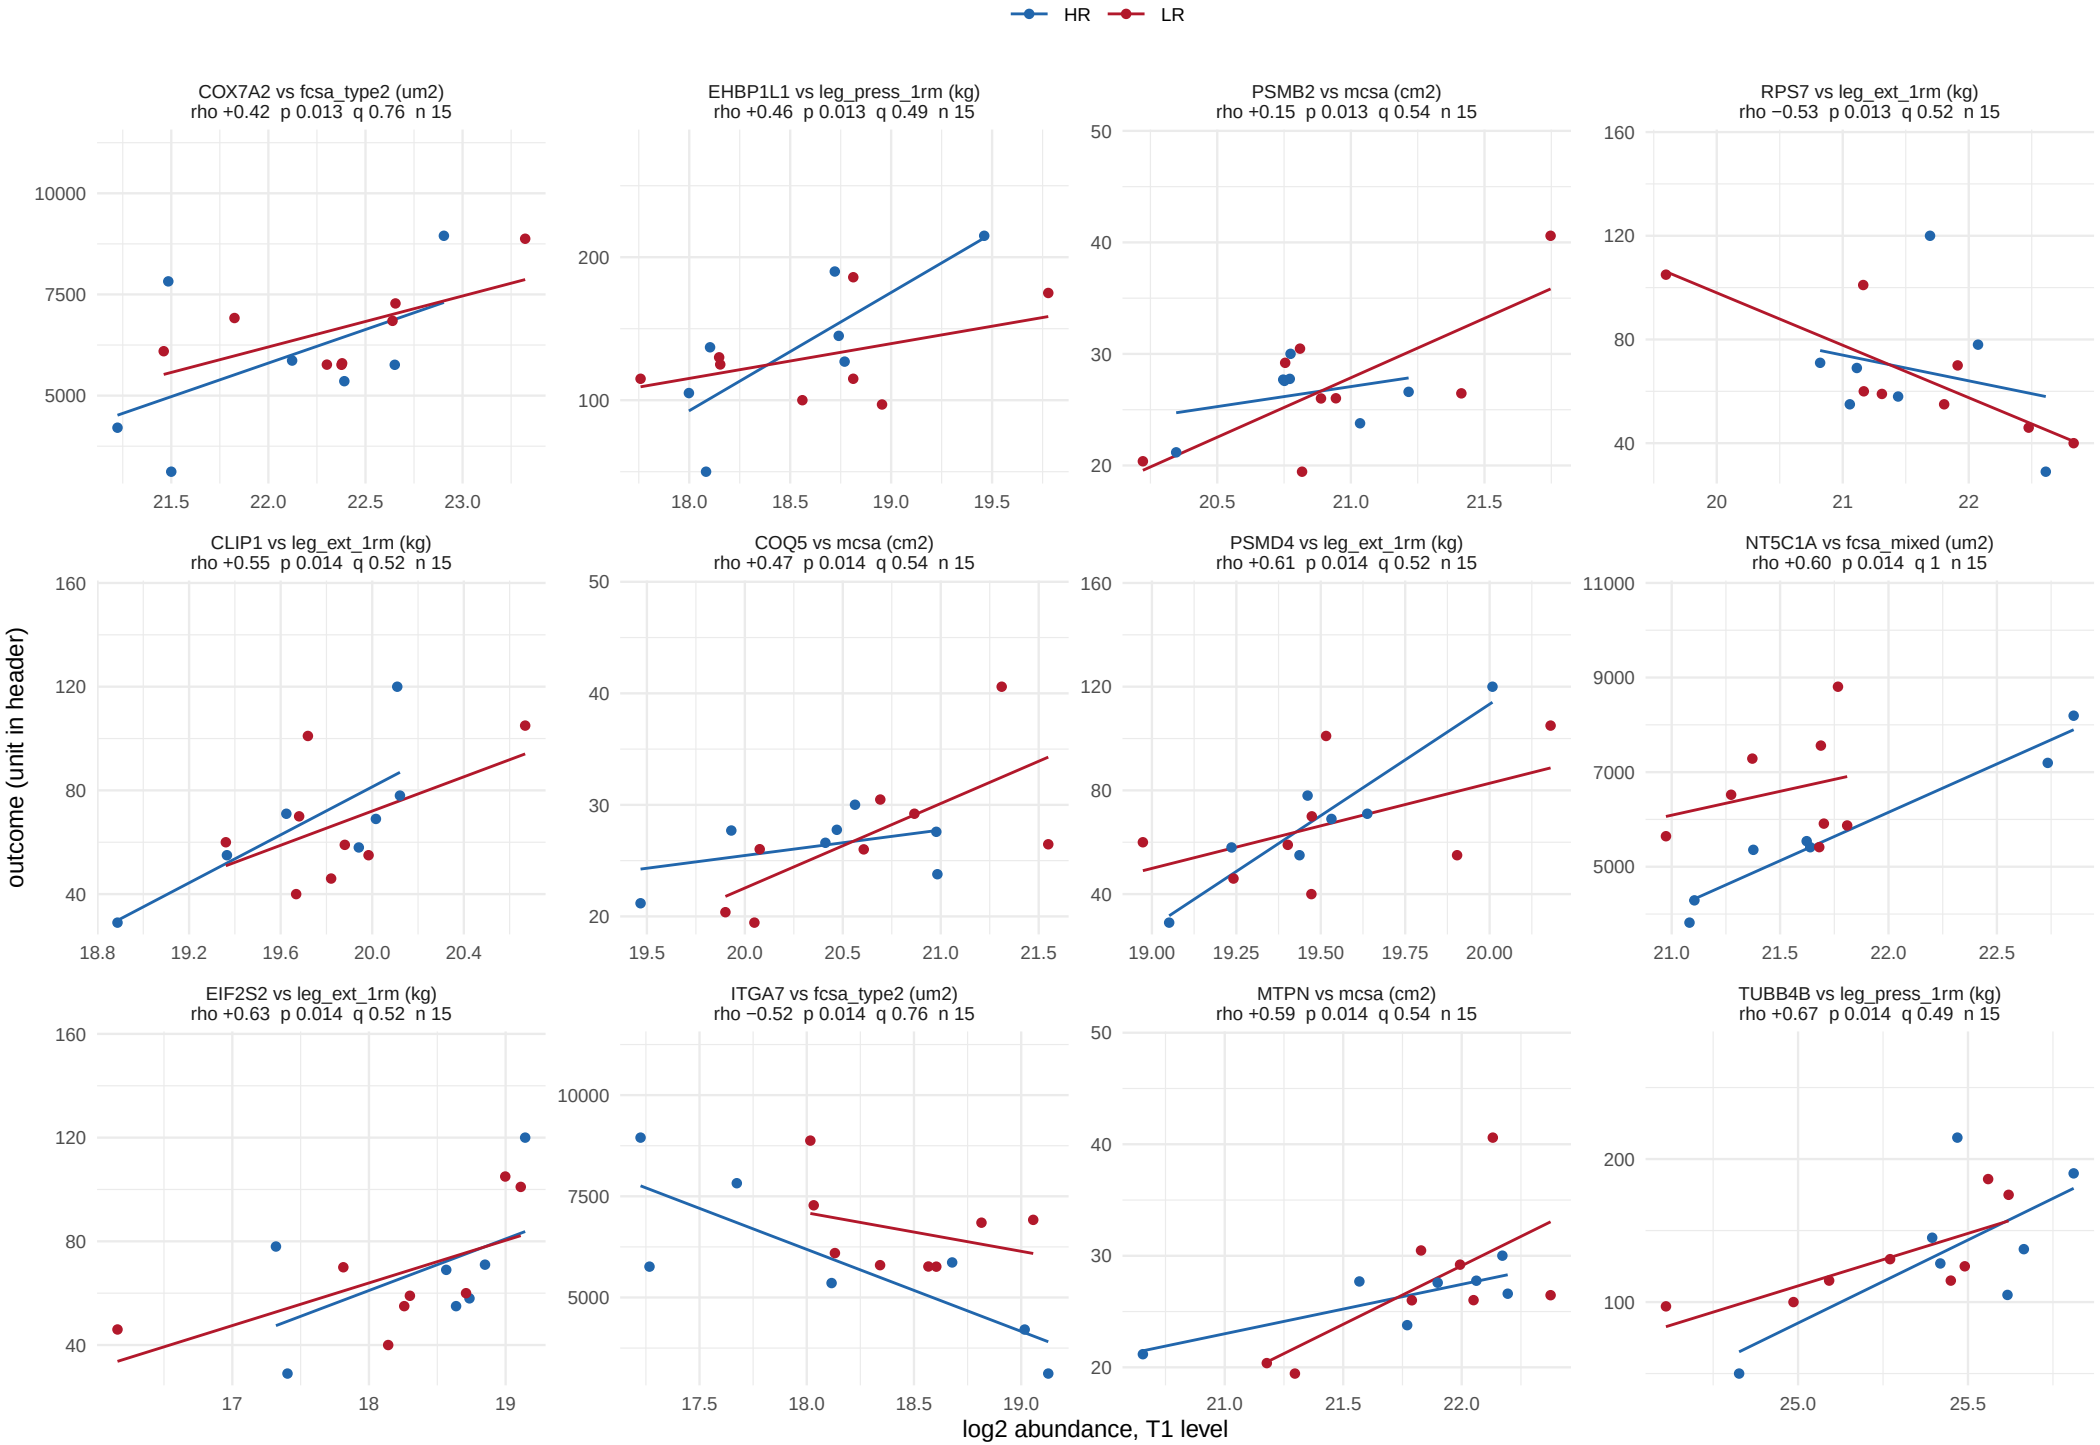

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


693 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 18 of 58.

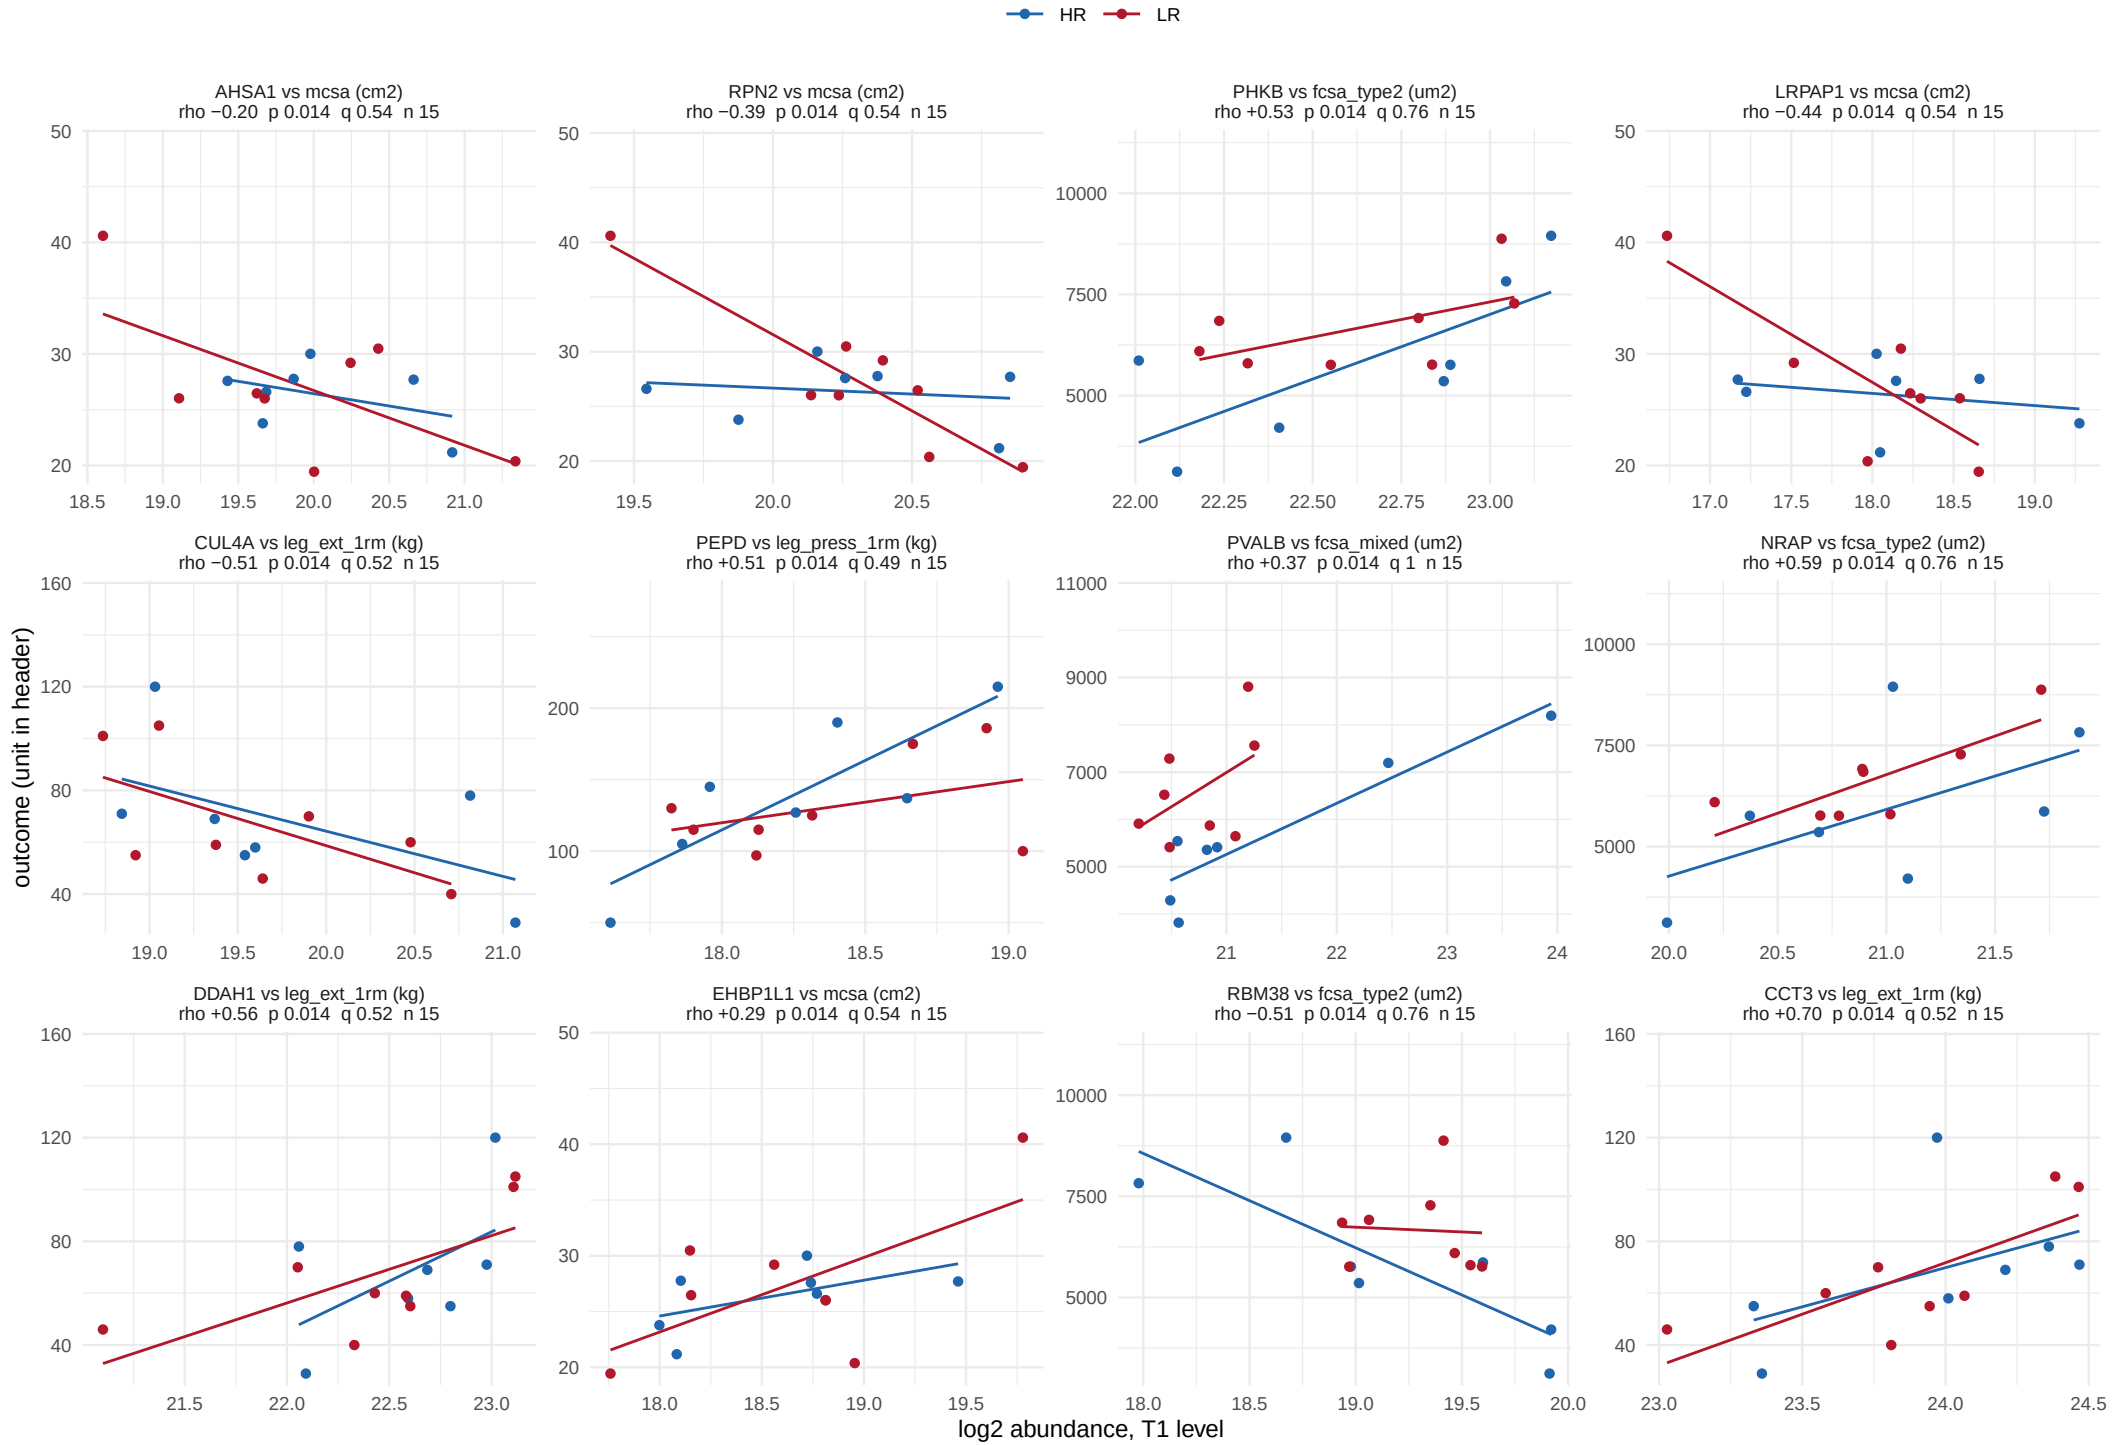

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


693 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 19 of 58.

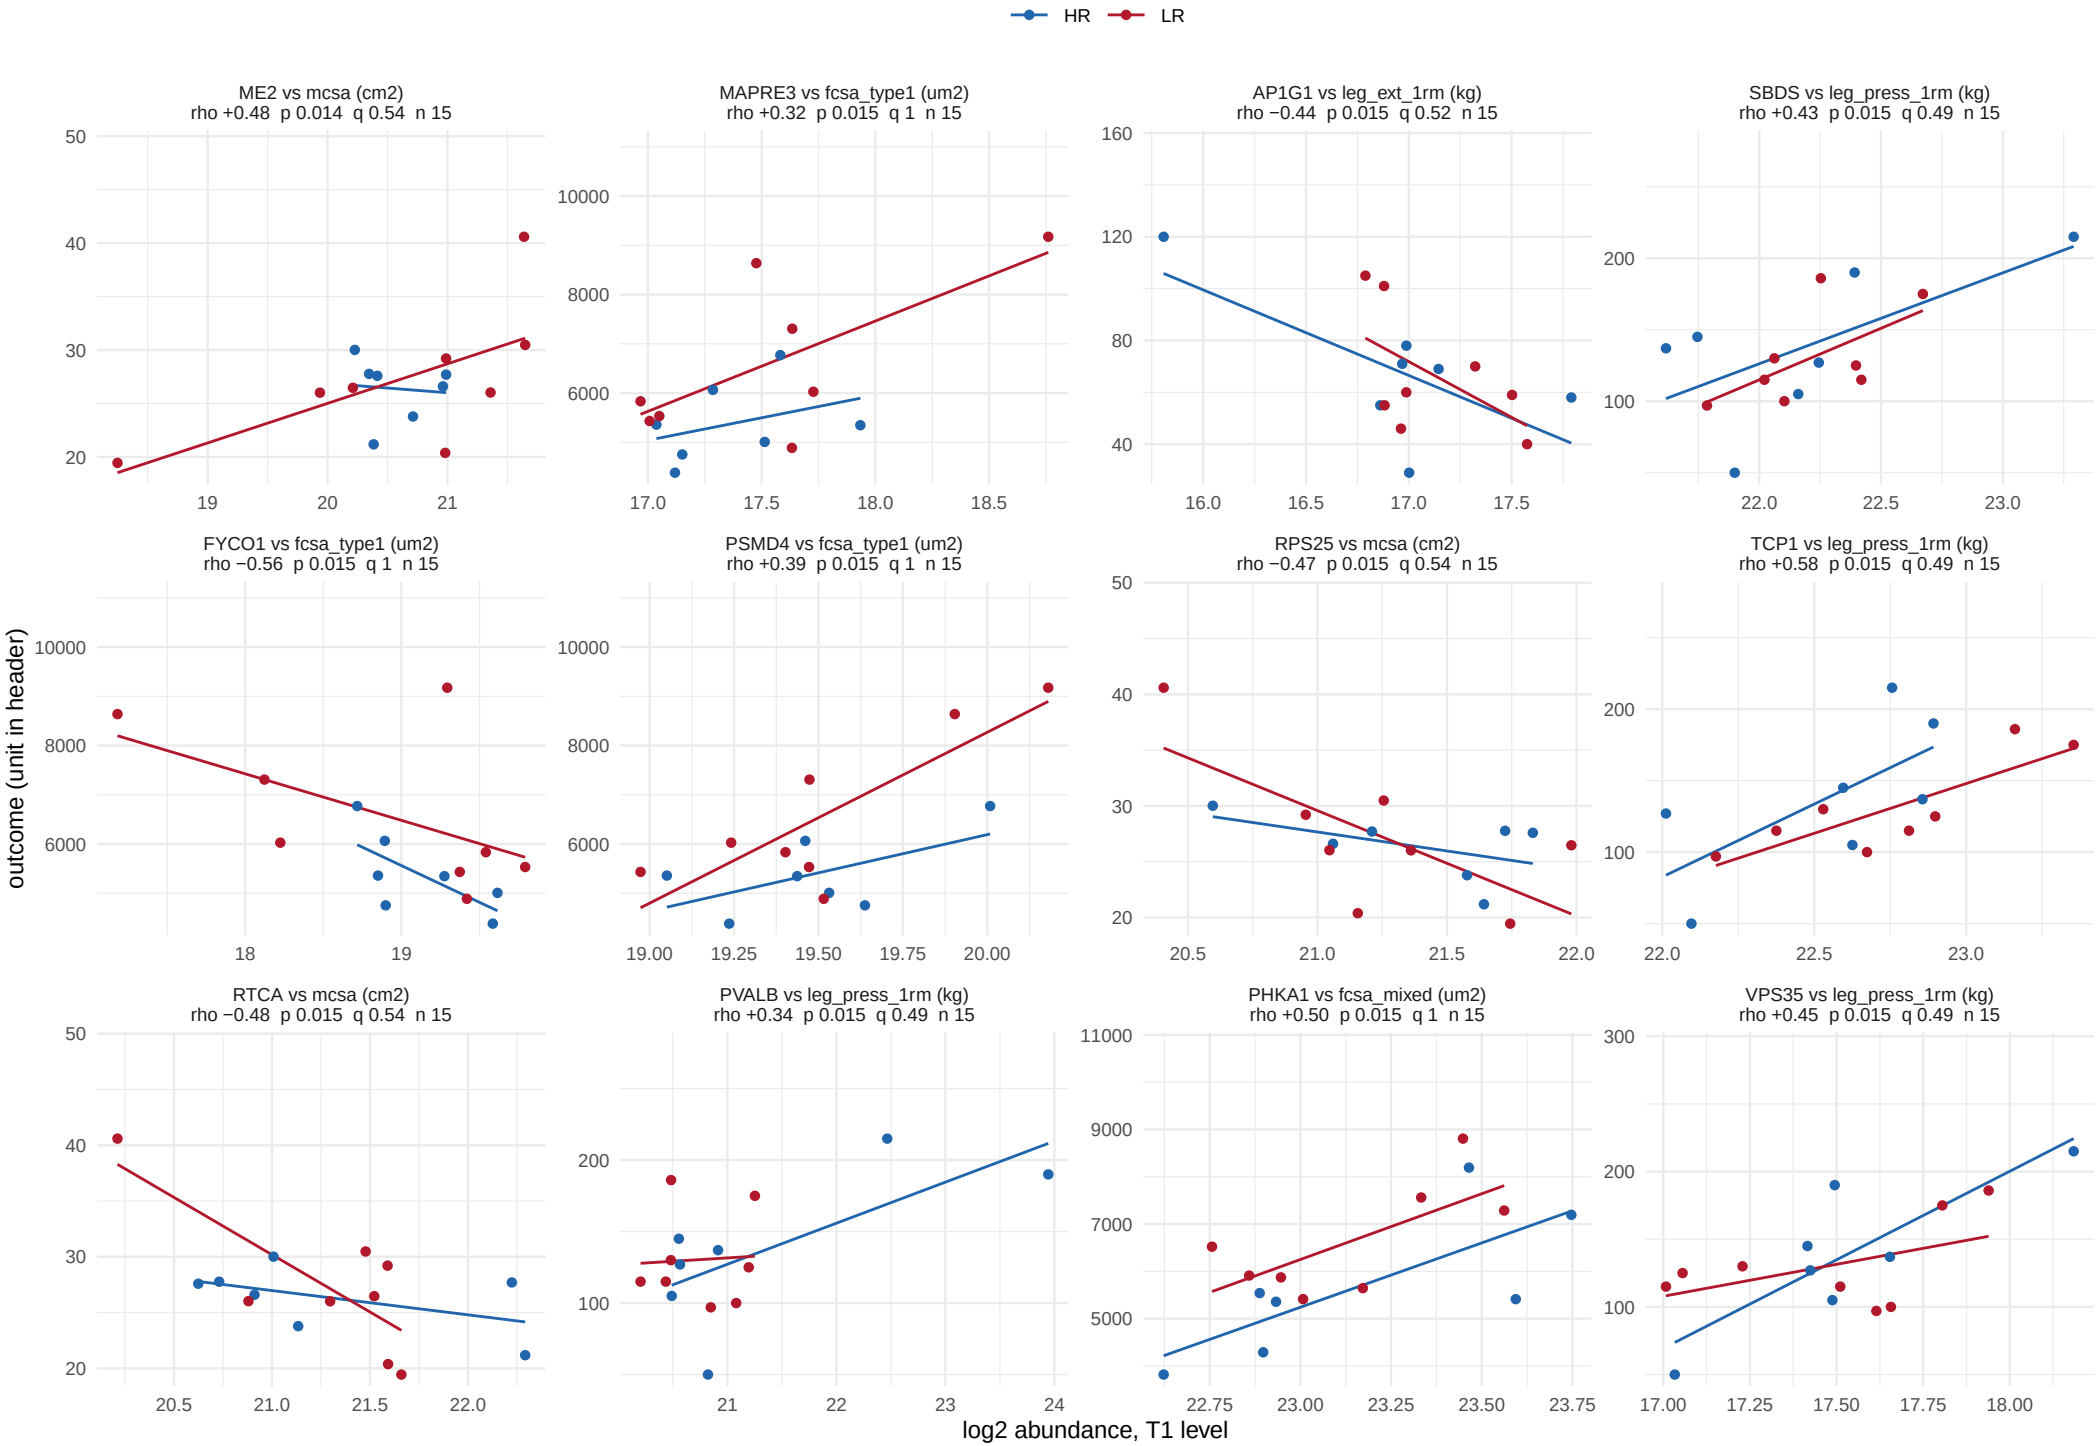

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window

693 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 20 of 58.

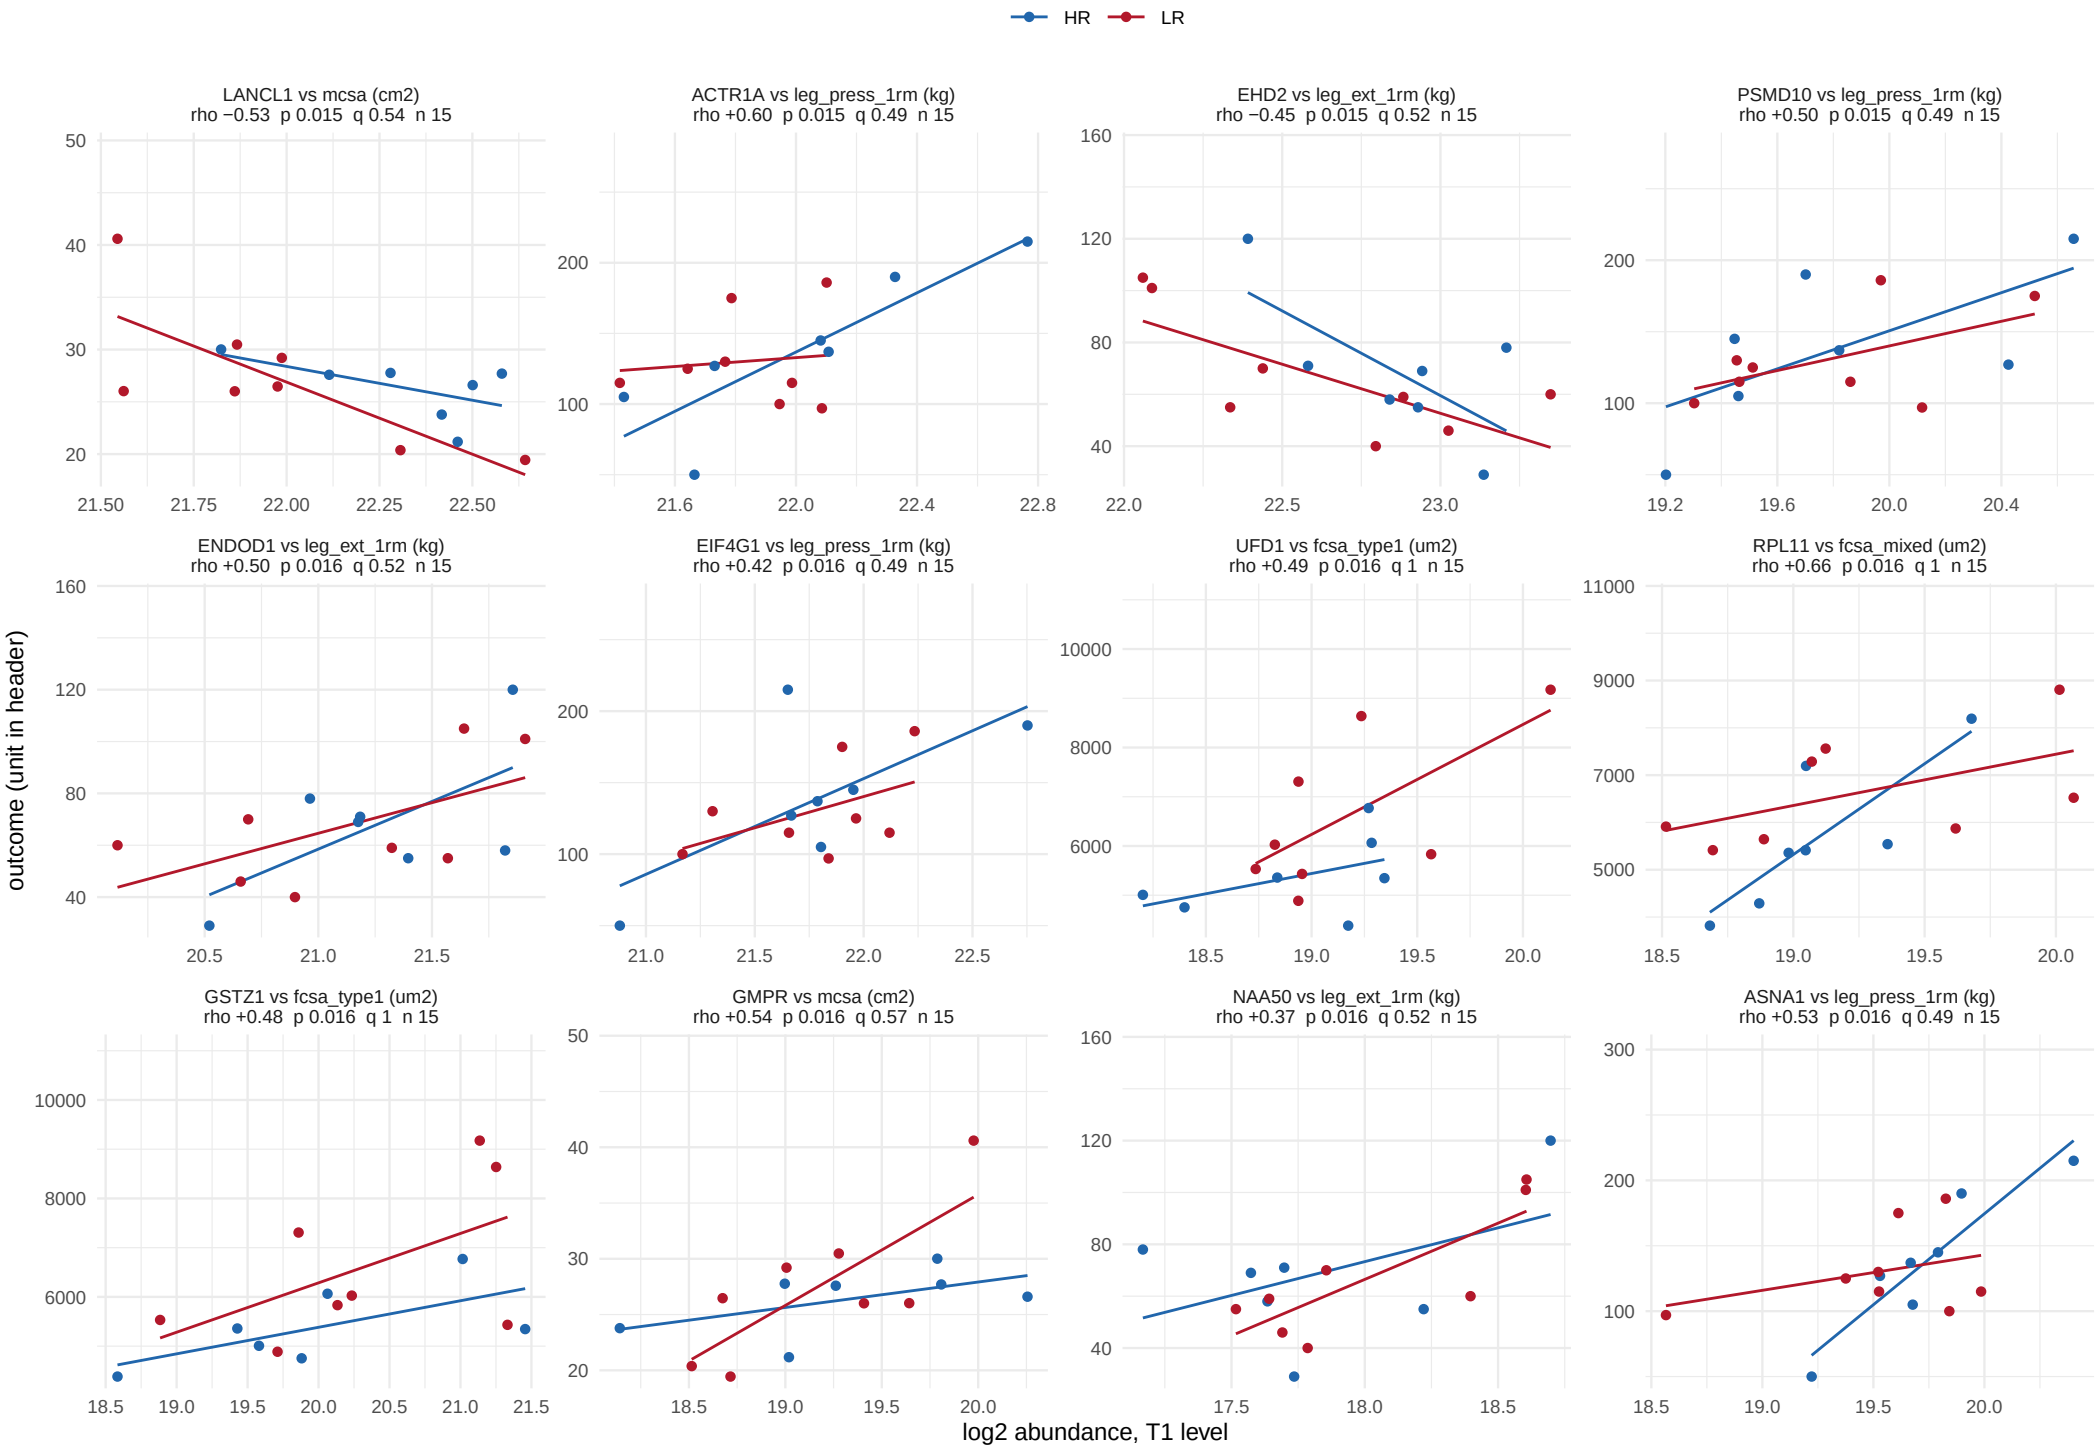

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


693 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 21 of 58.



One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


693 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 22 of 58.

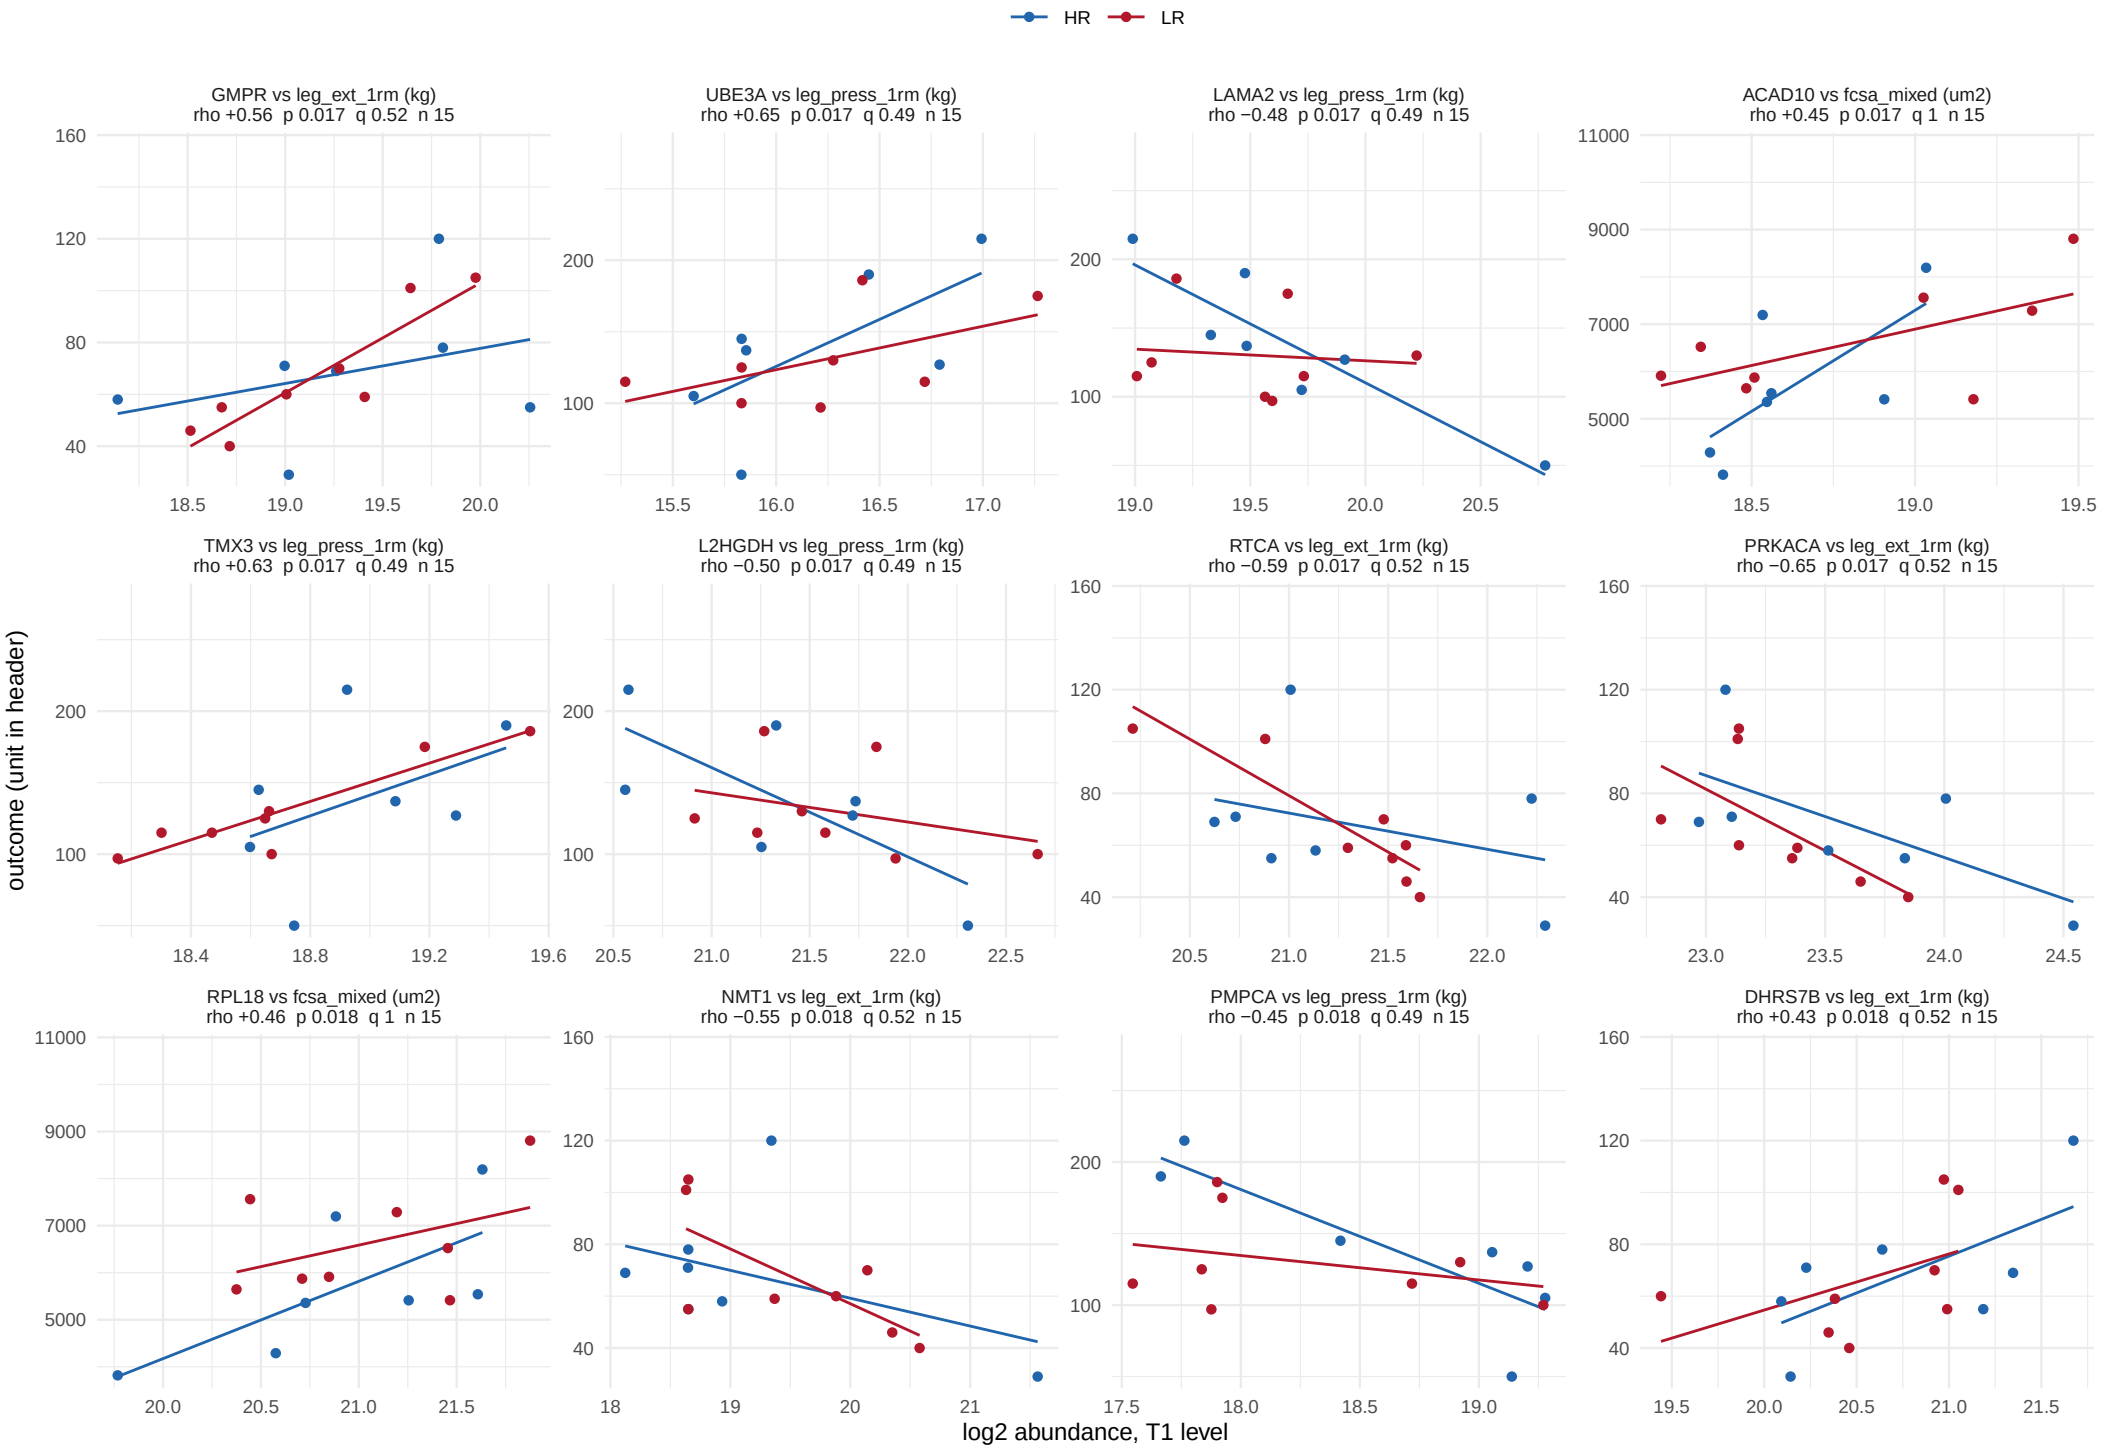

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


693 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 23 of 58.

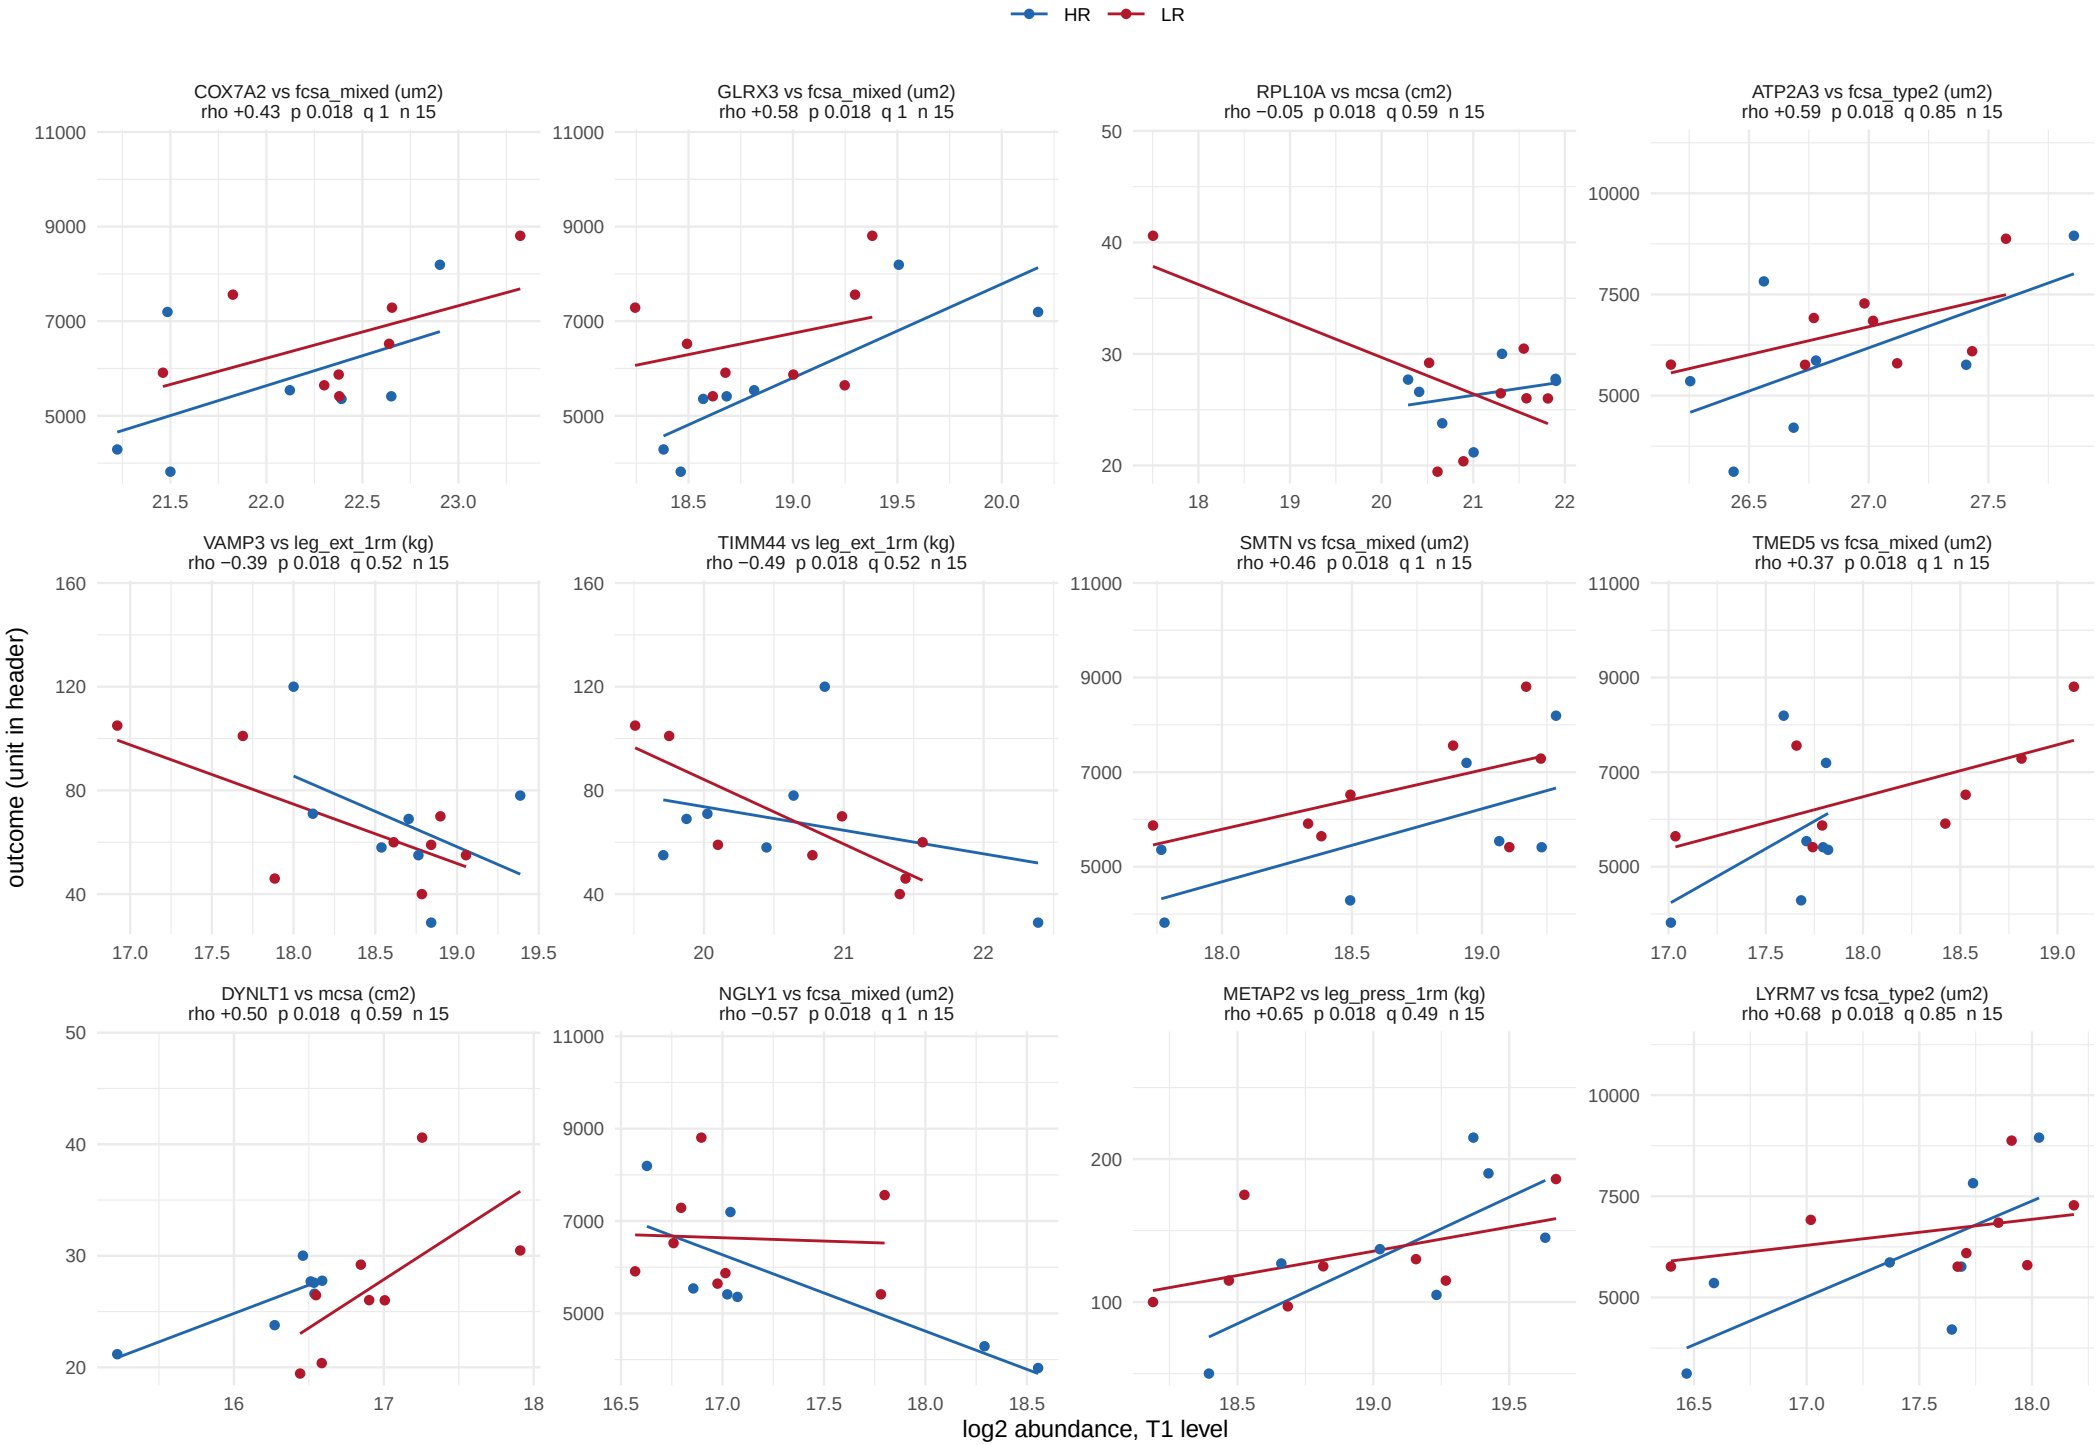

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


693 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 24 of 58.

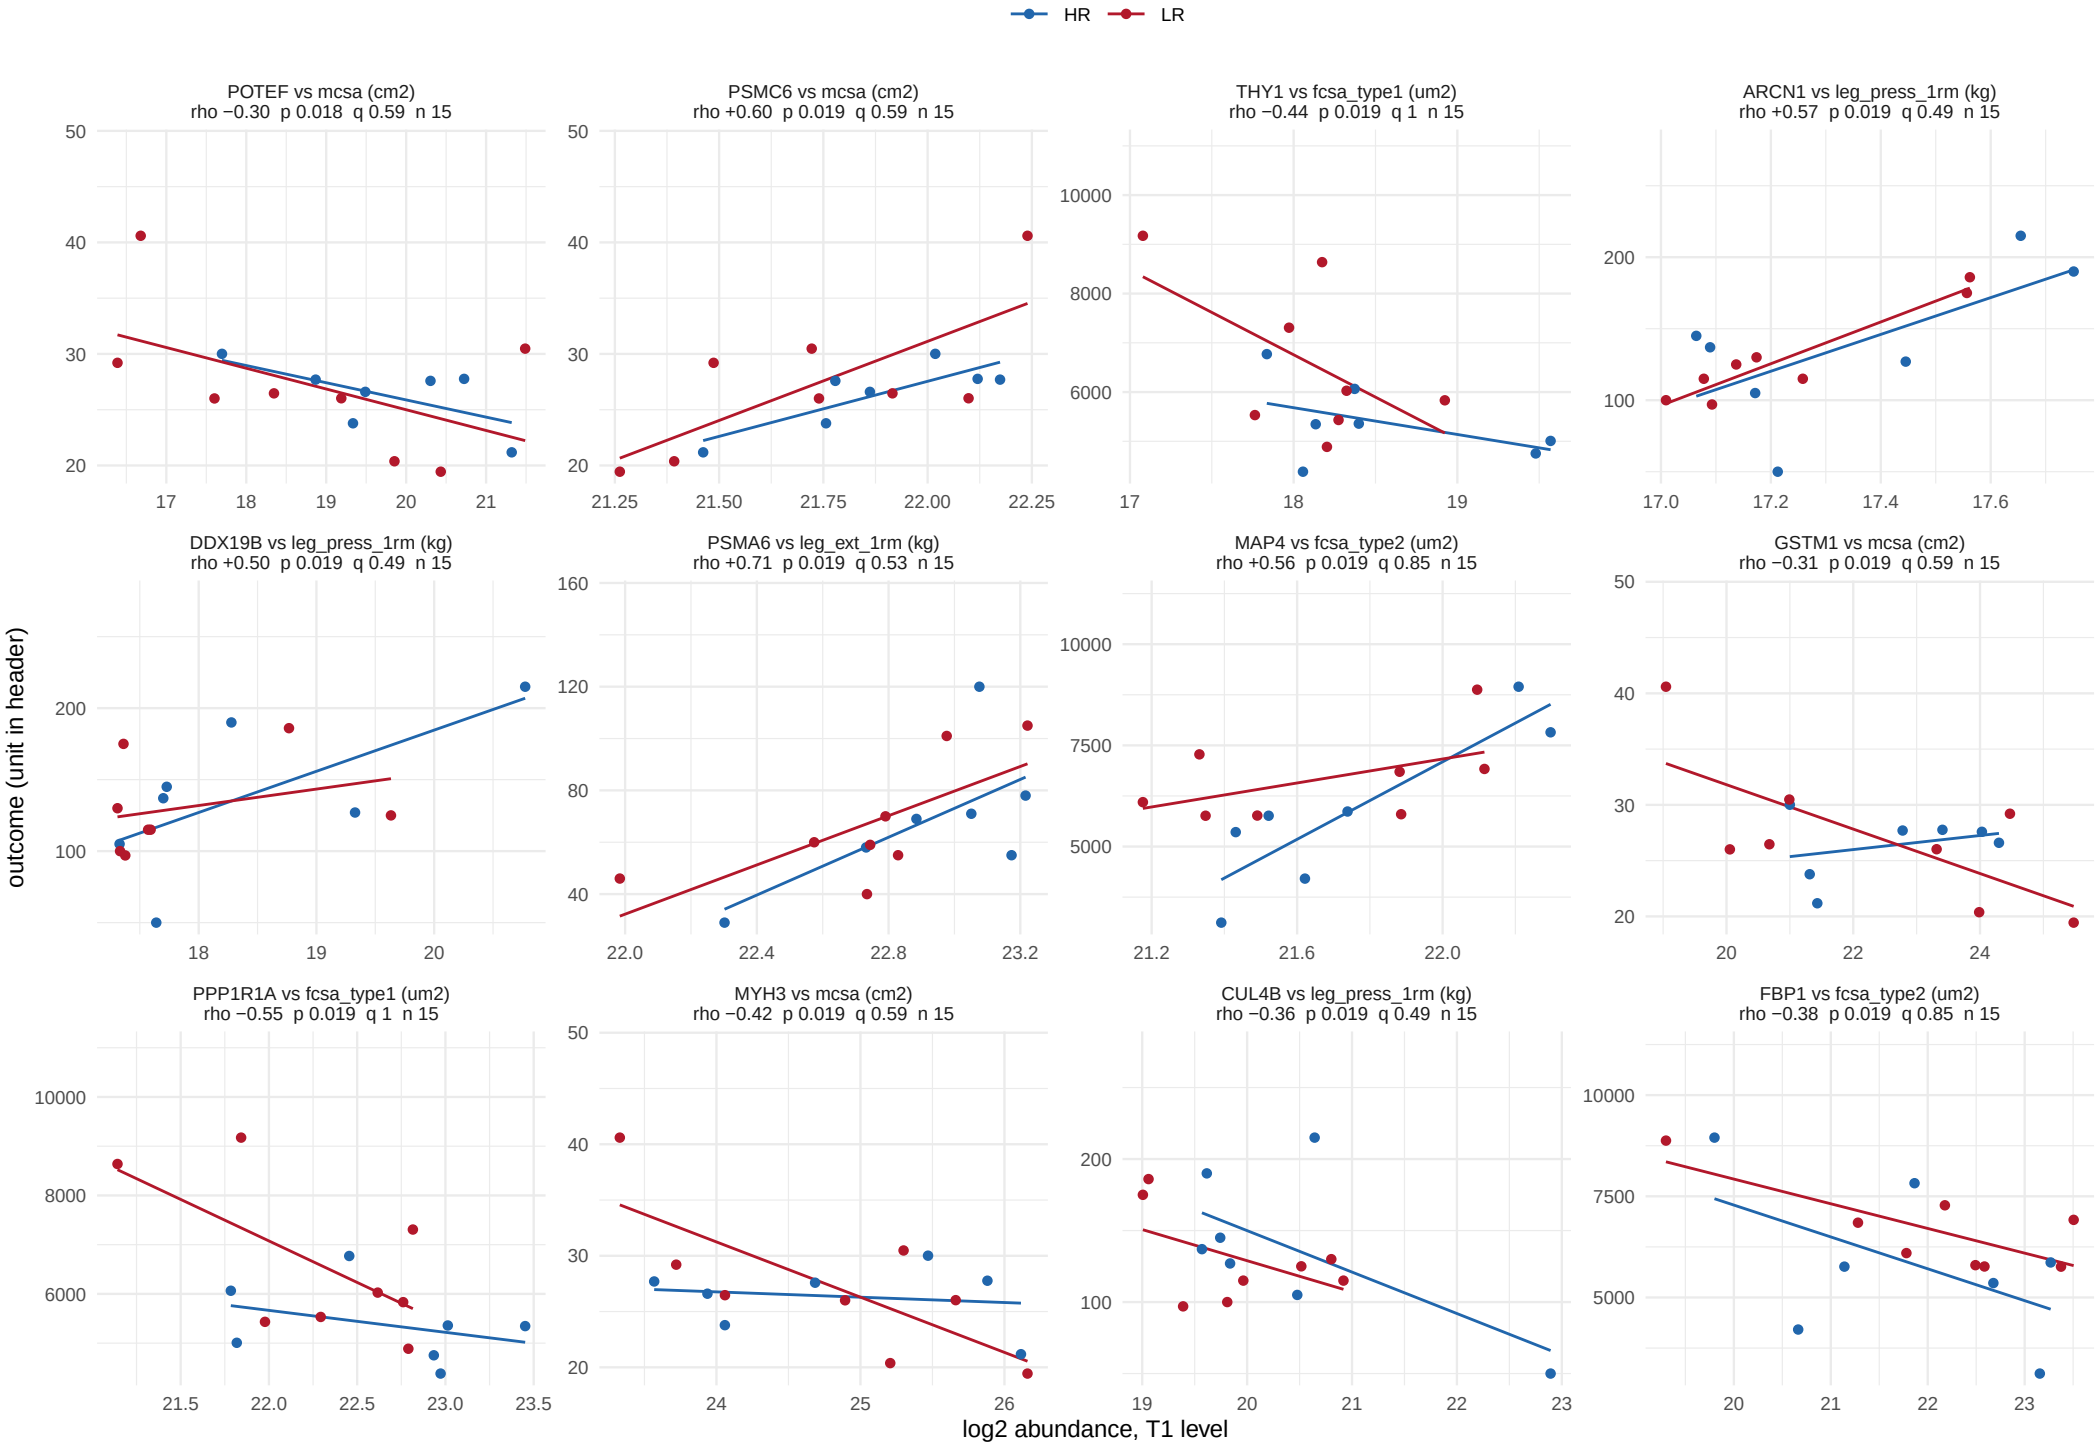

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


693 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 25 of 58.

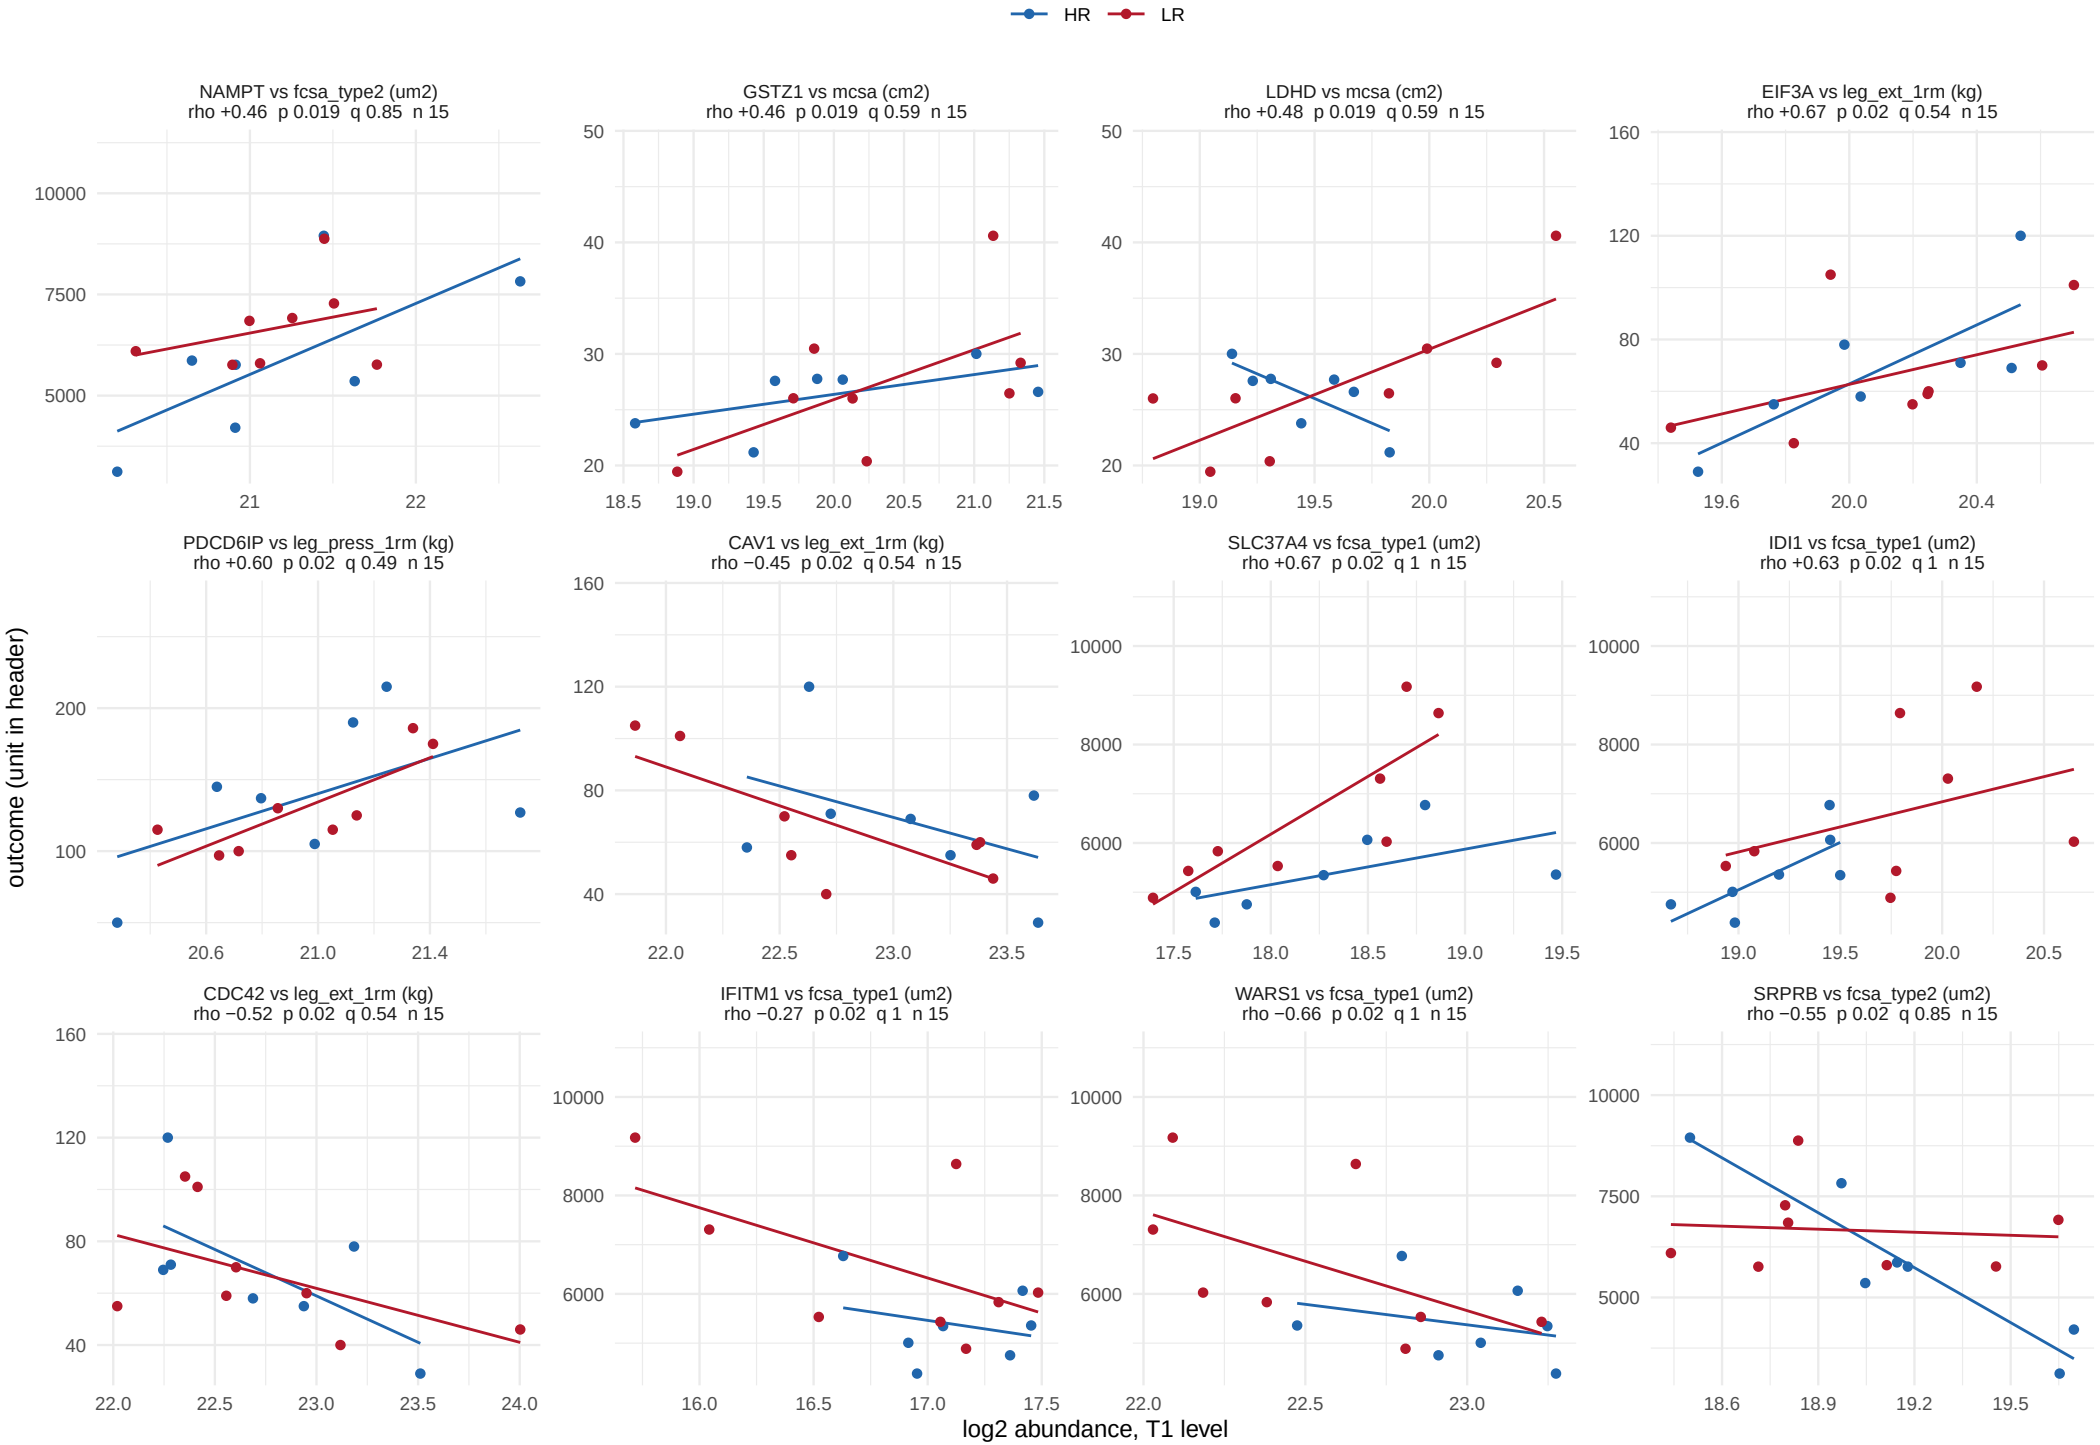

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


693 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 26 of 58.

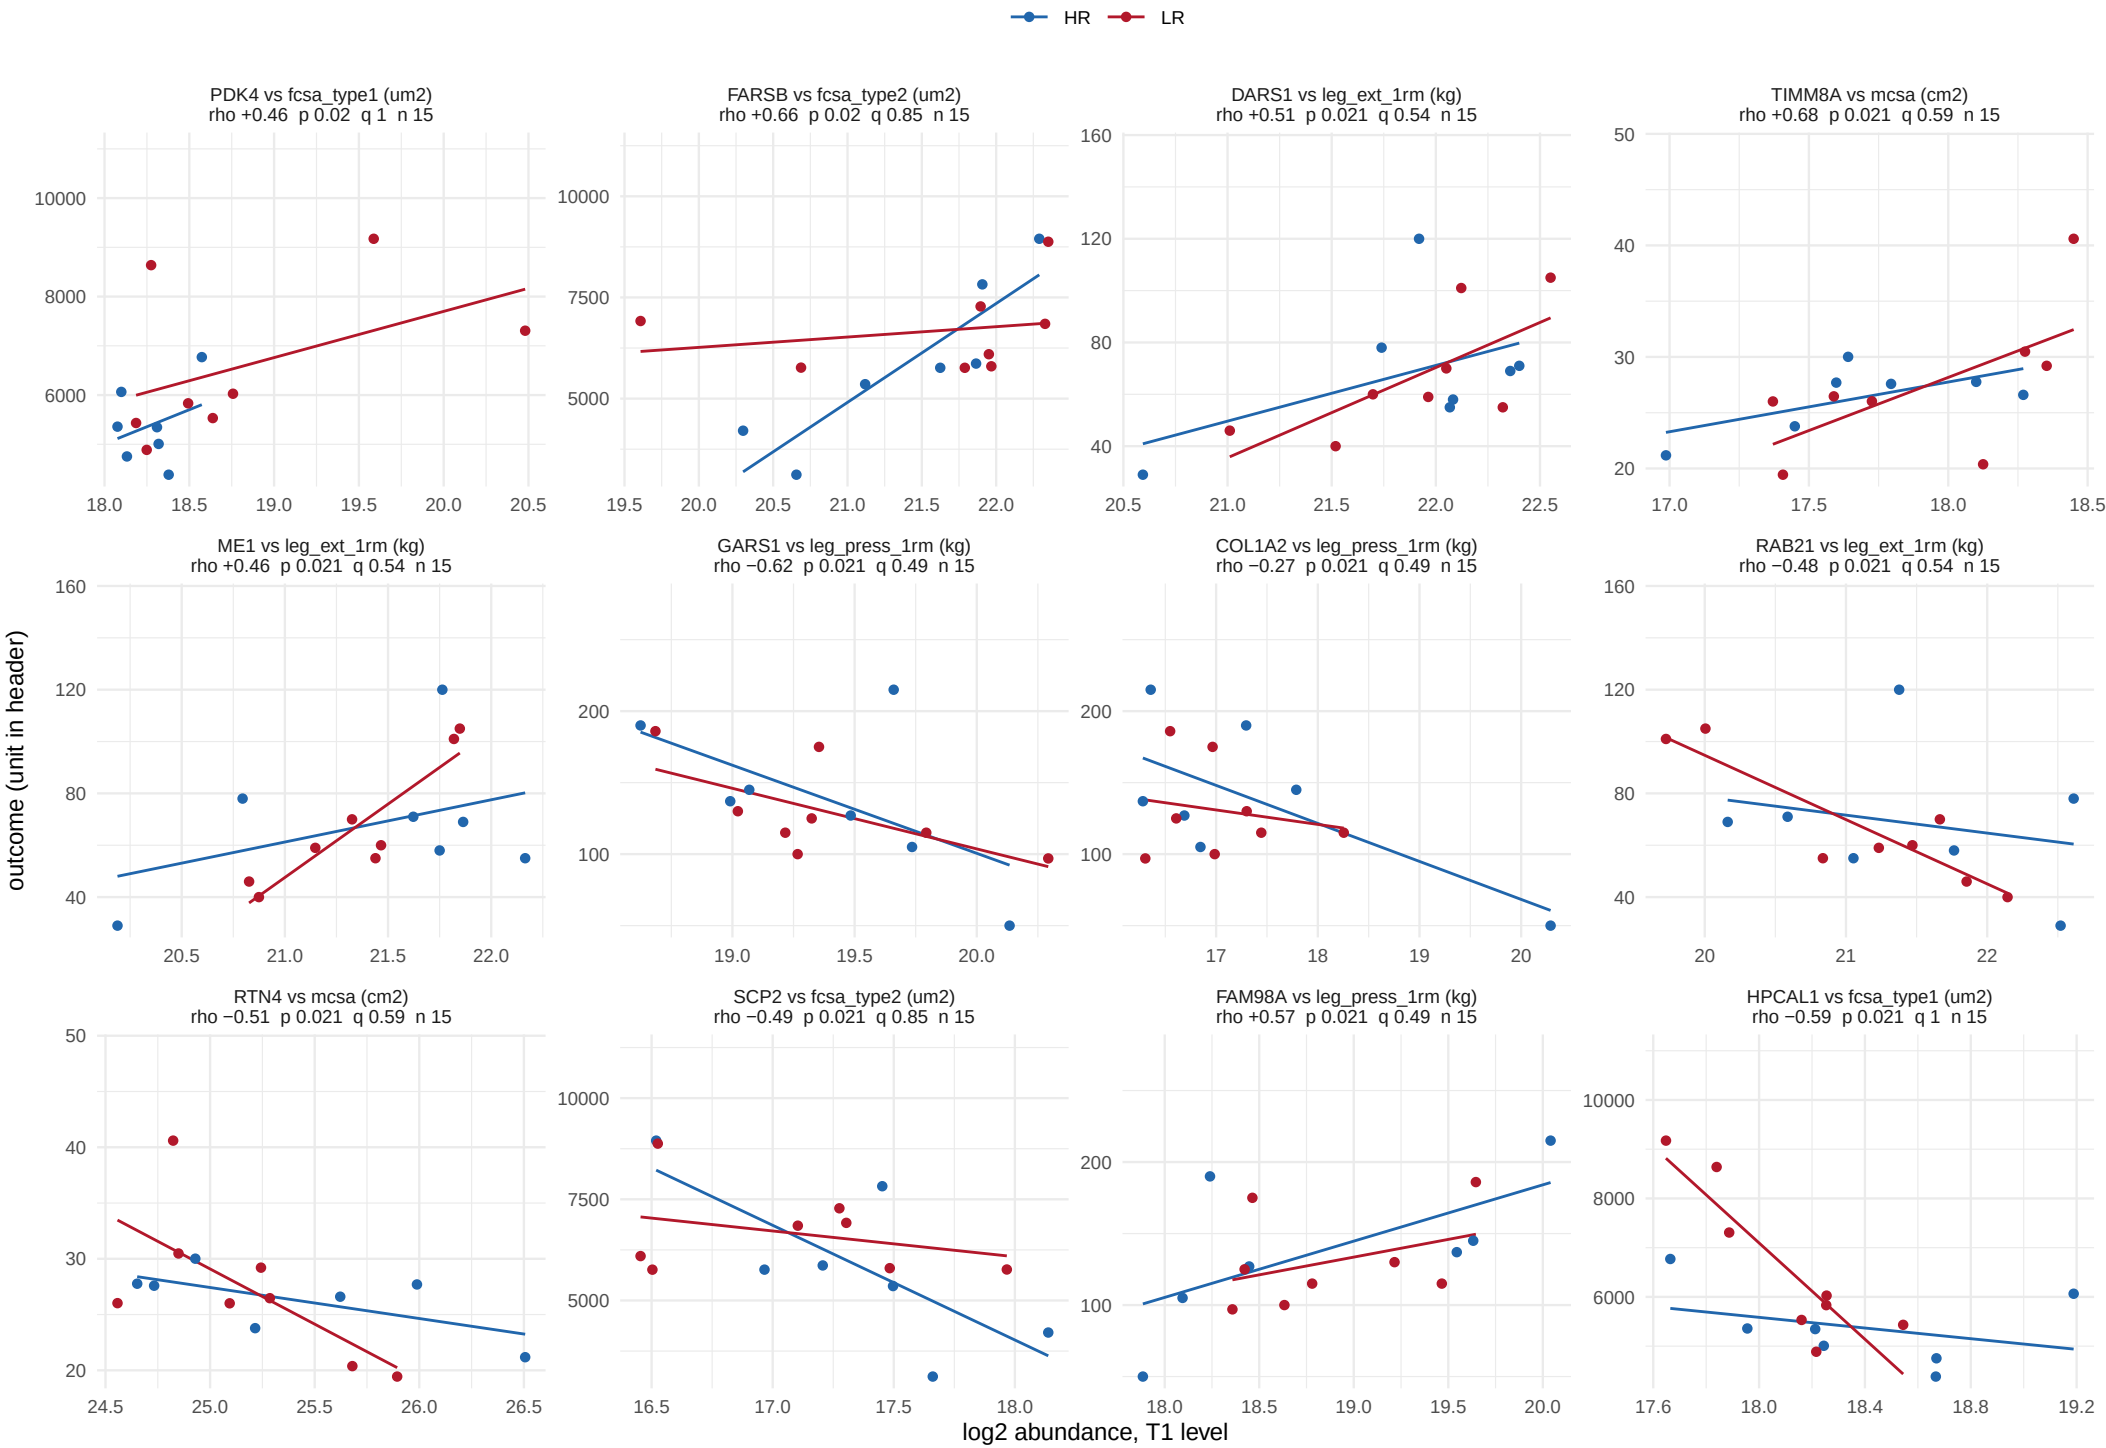

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


693 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 27 of 58.

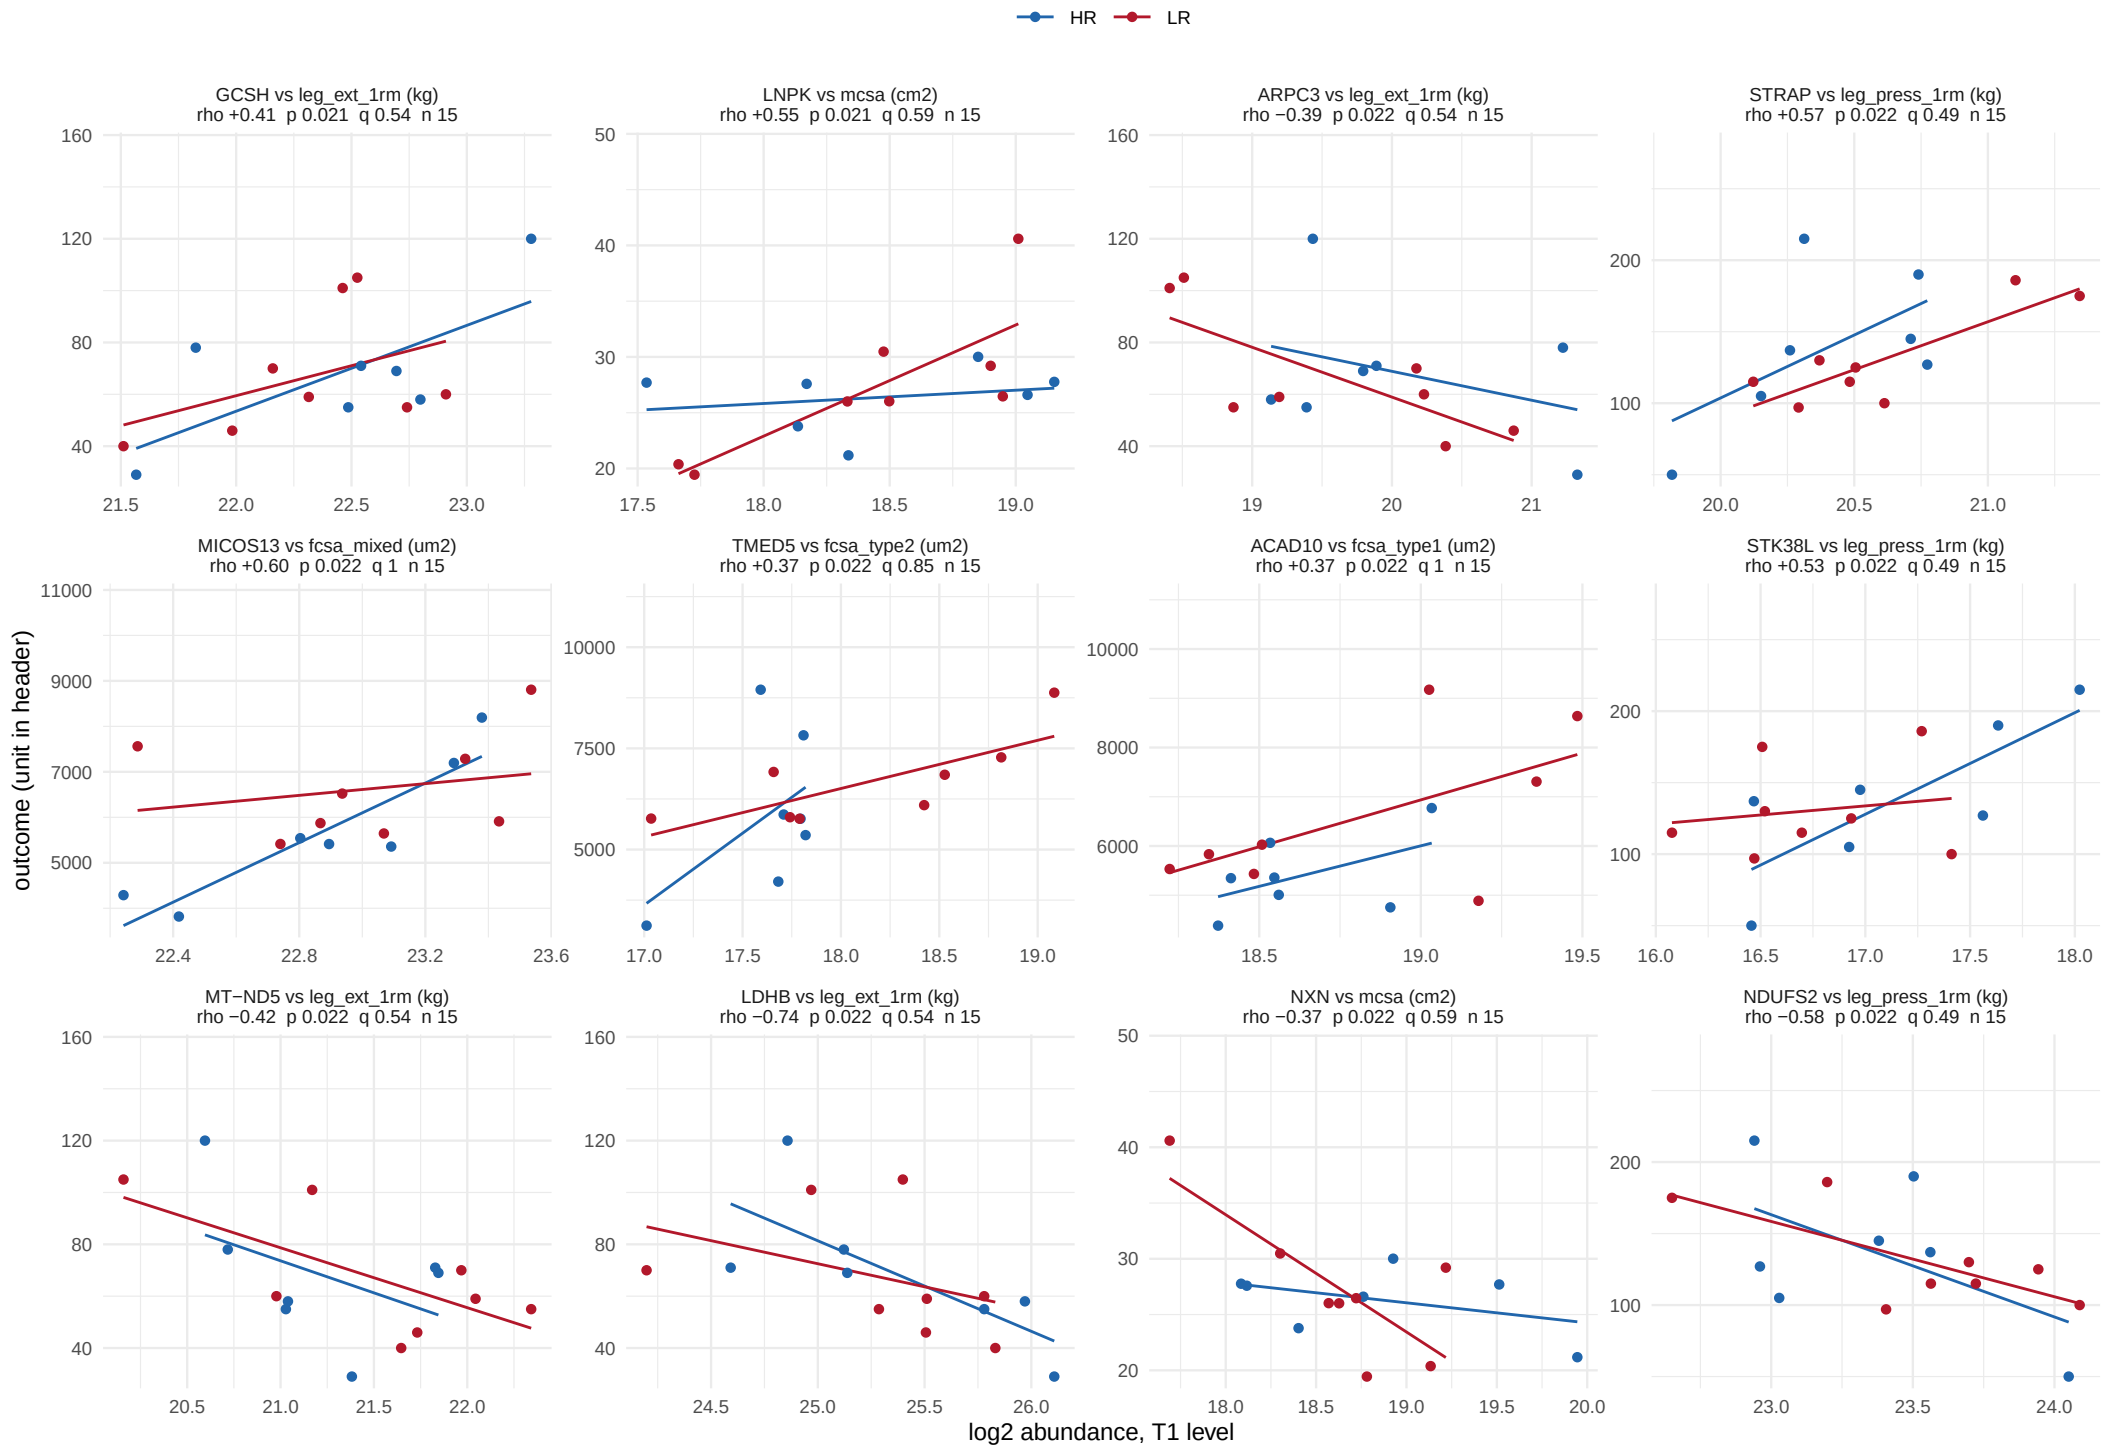

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


693 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 28 of 58.

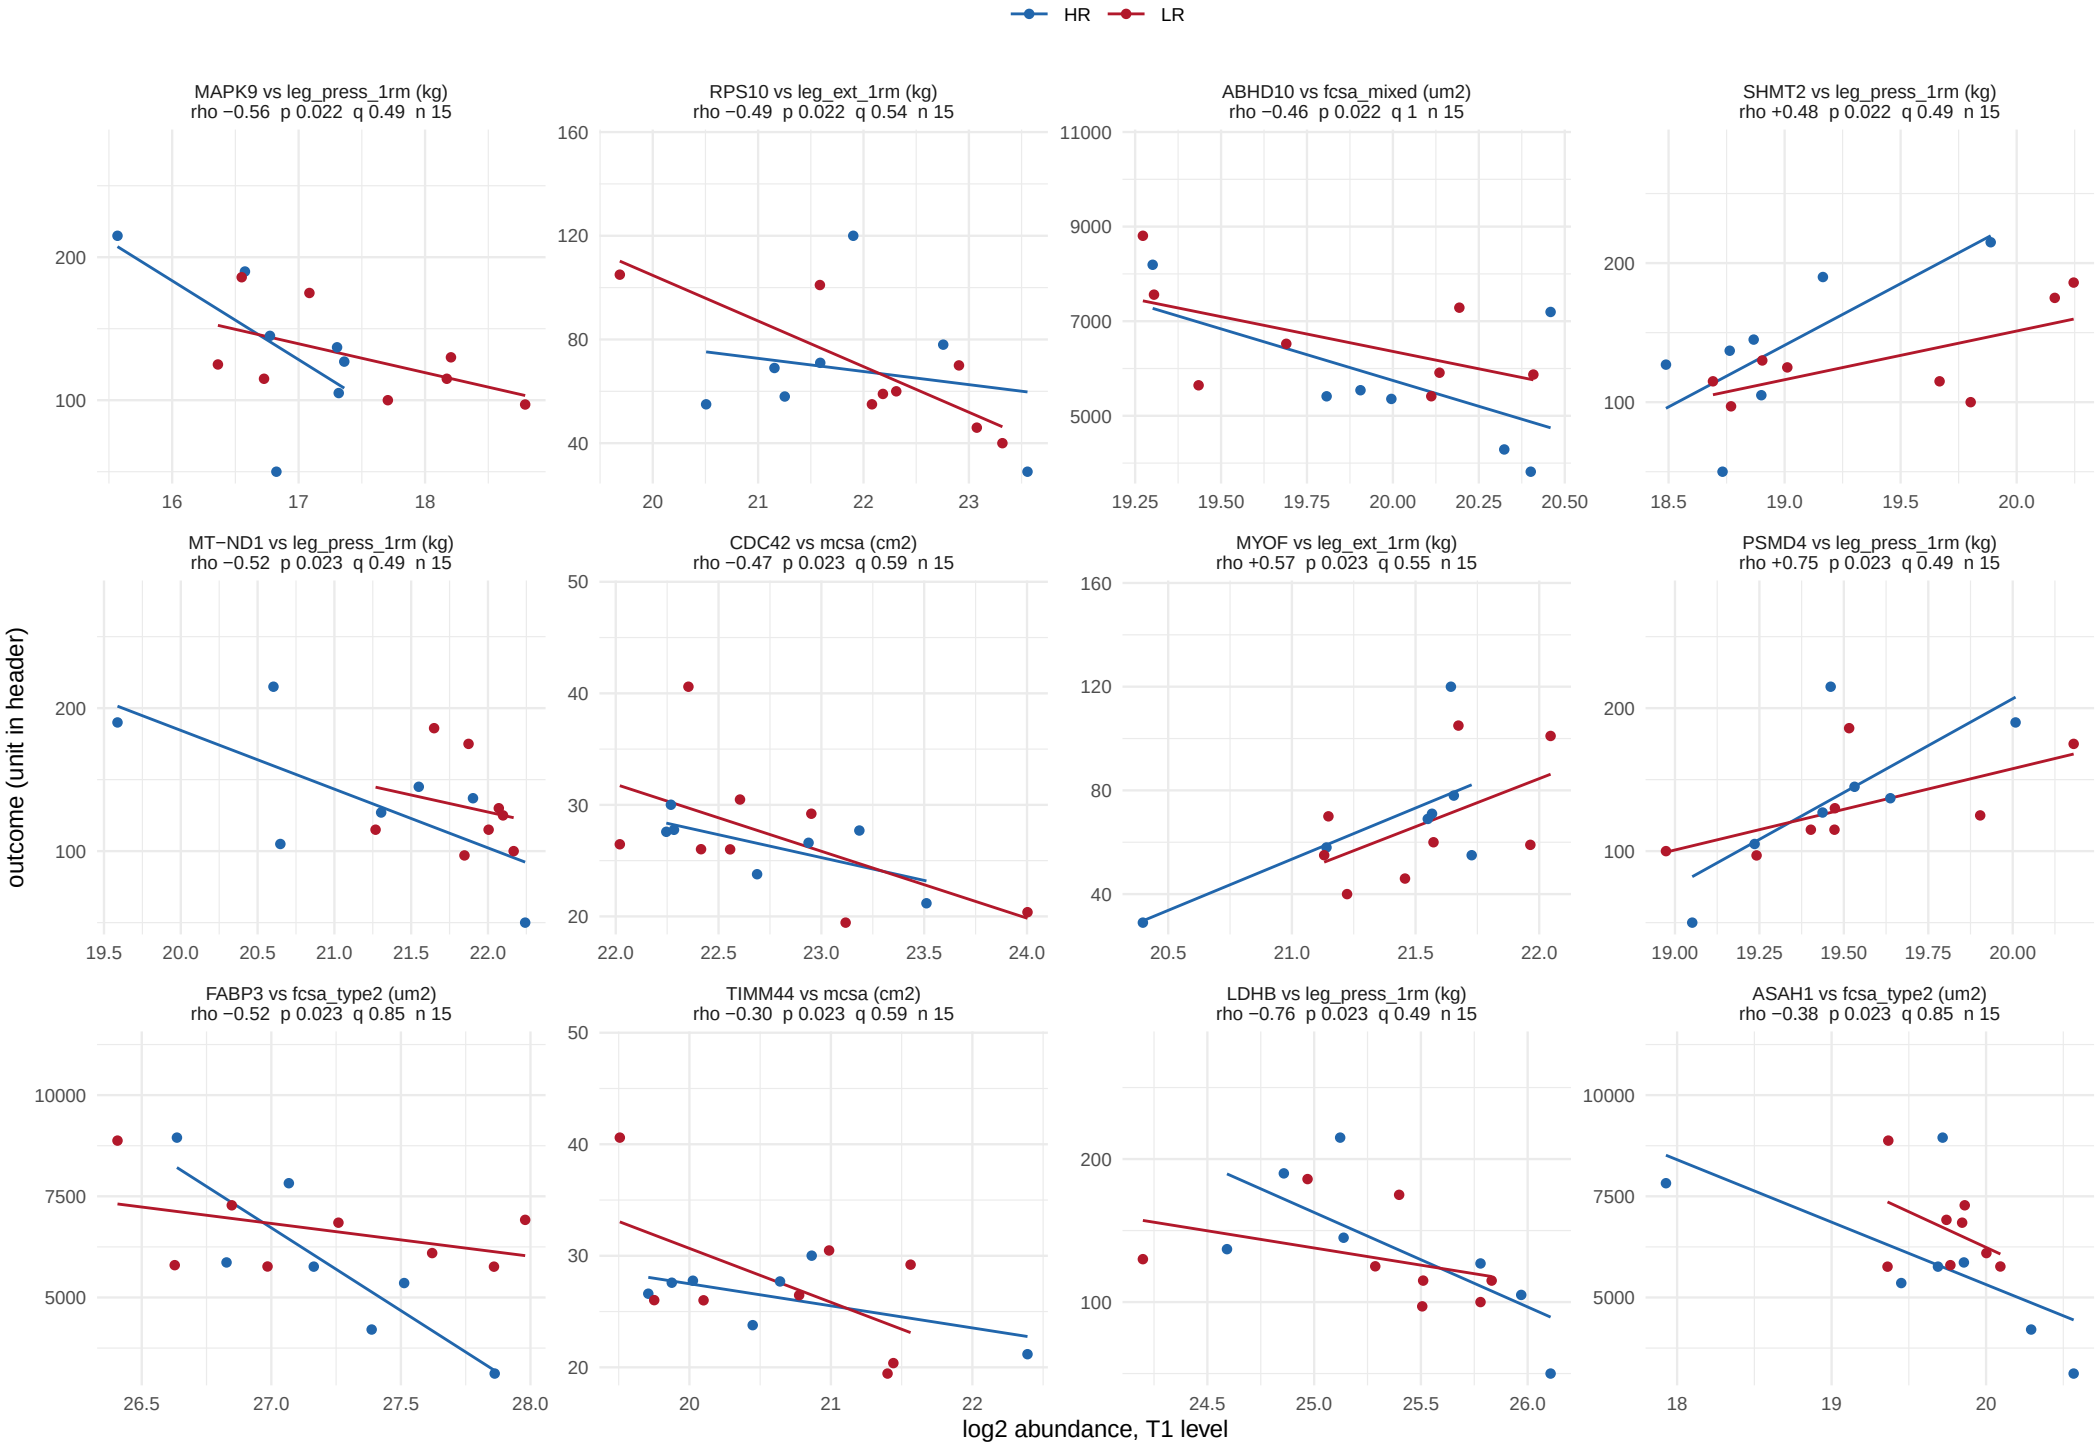

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


693 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 29 of 58.

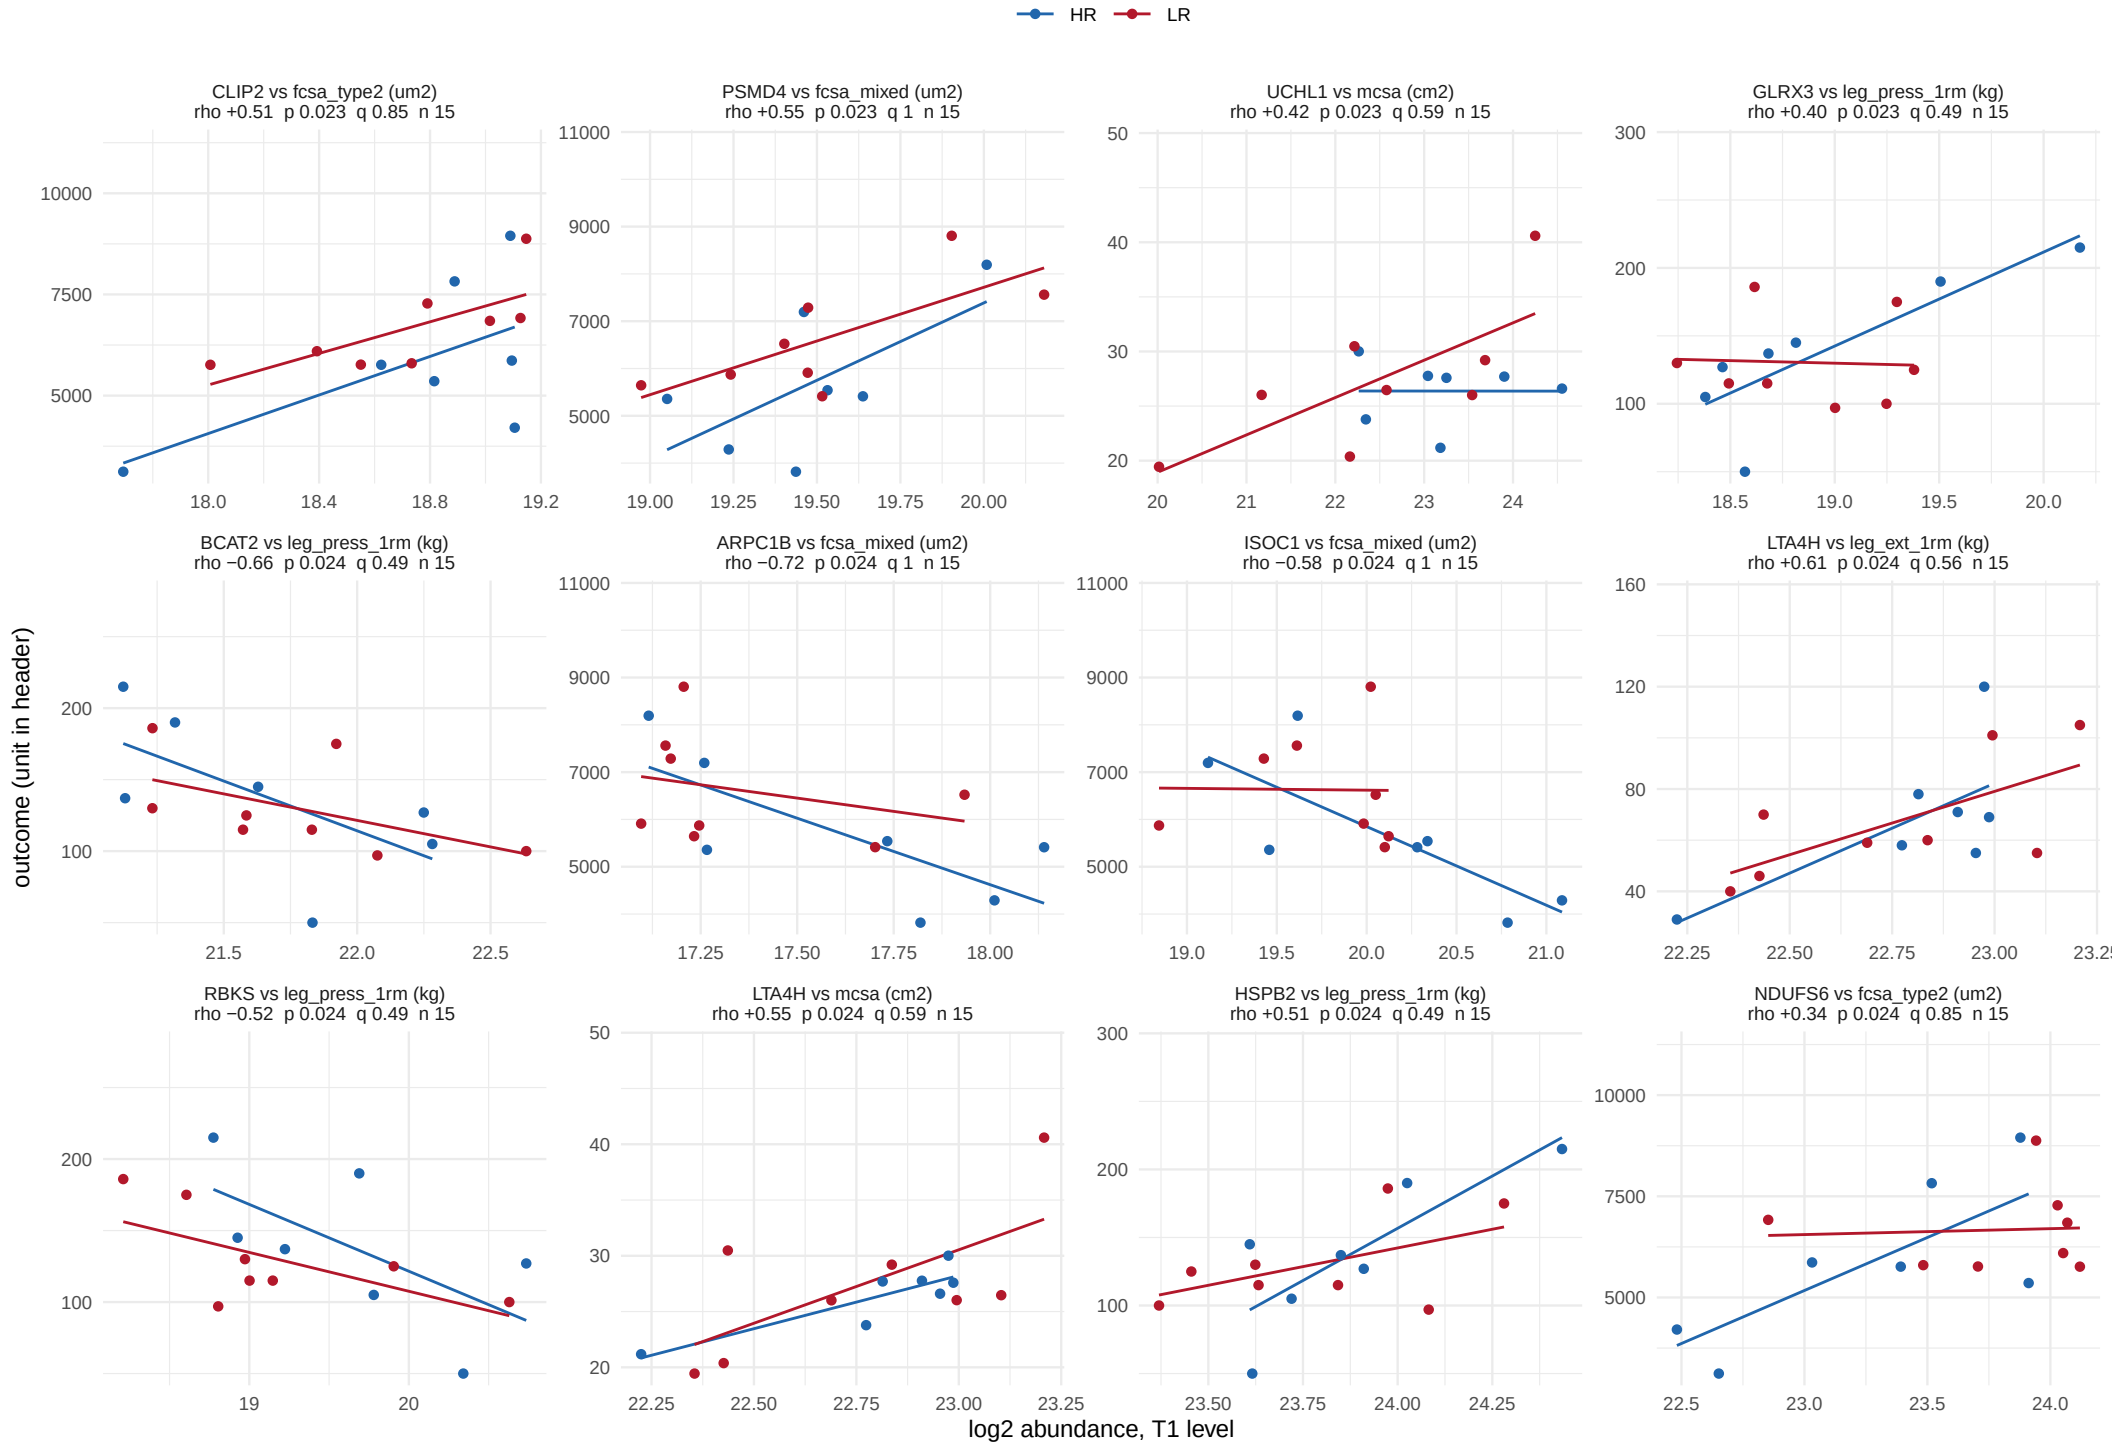

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


693 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 30 of 58.

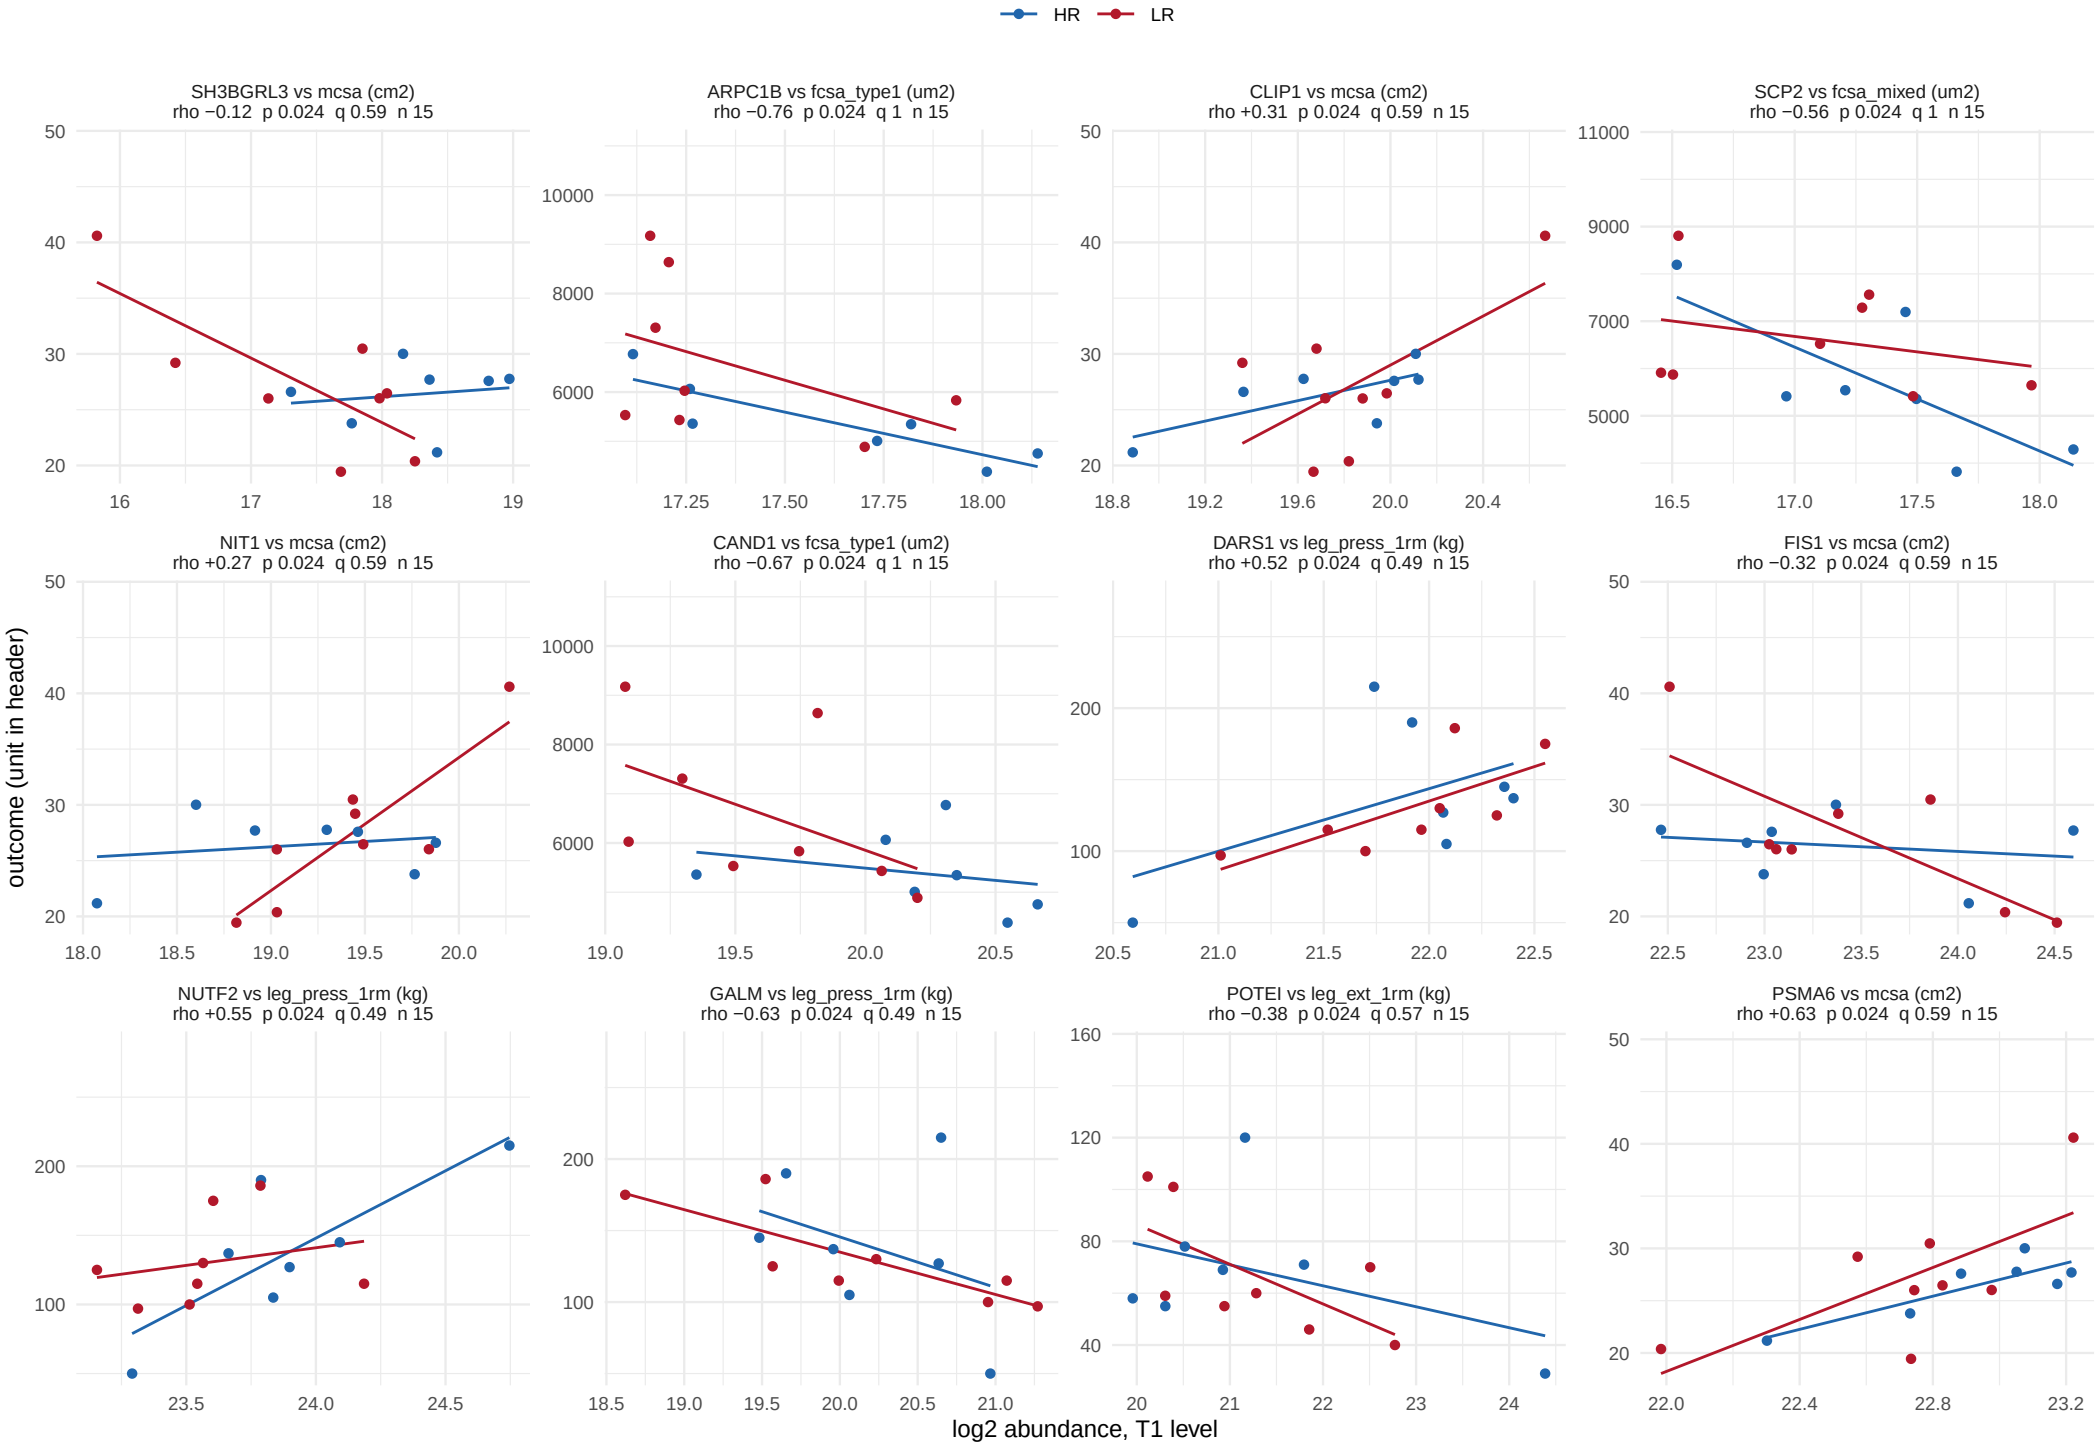

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


693 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 31 of 58.

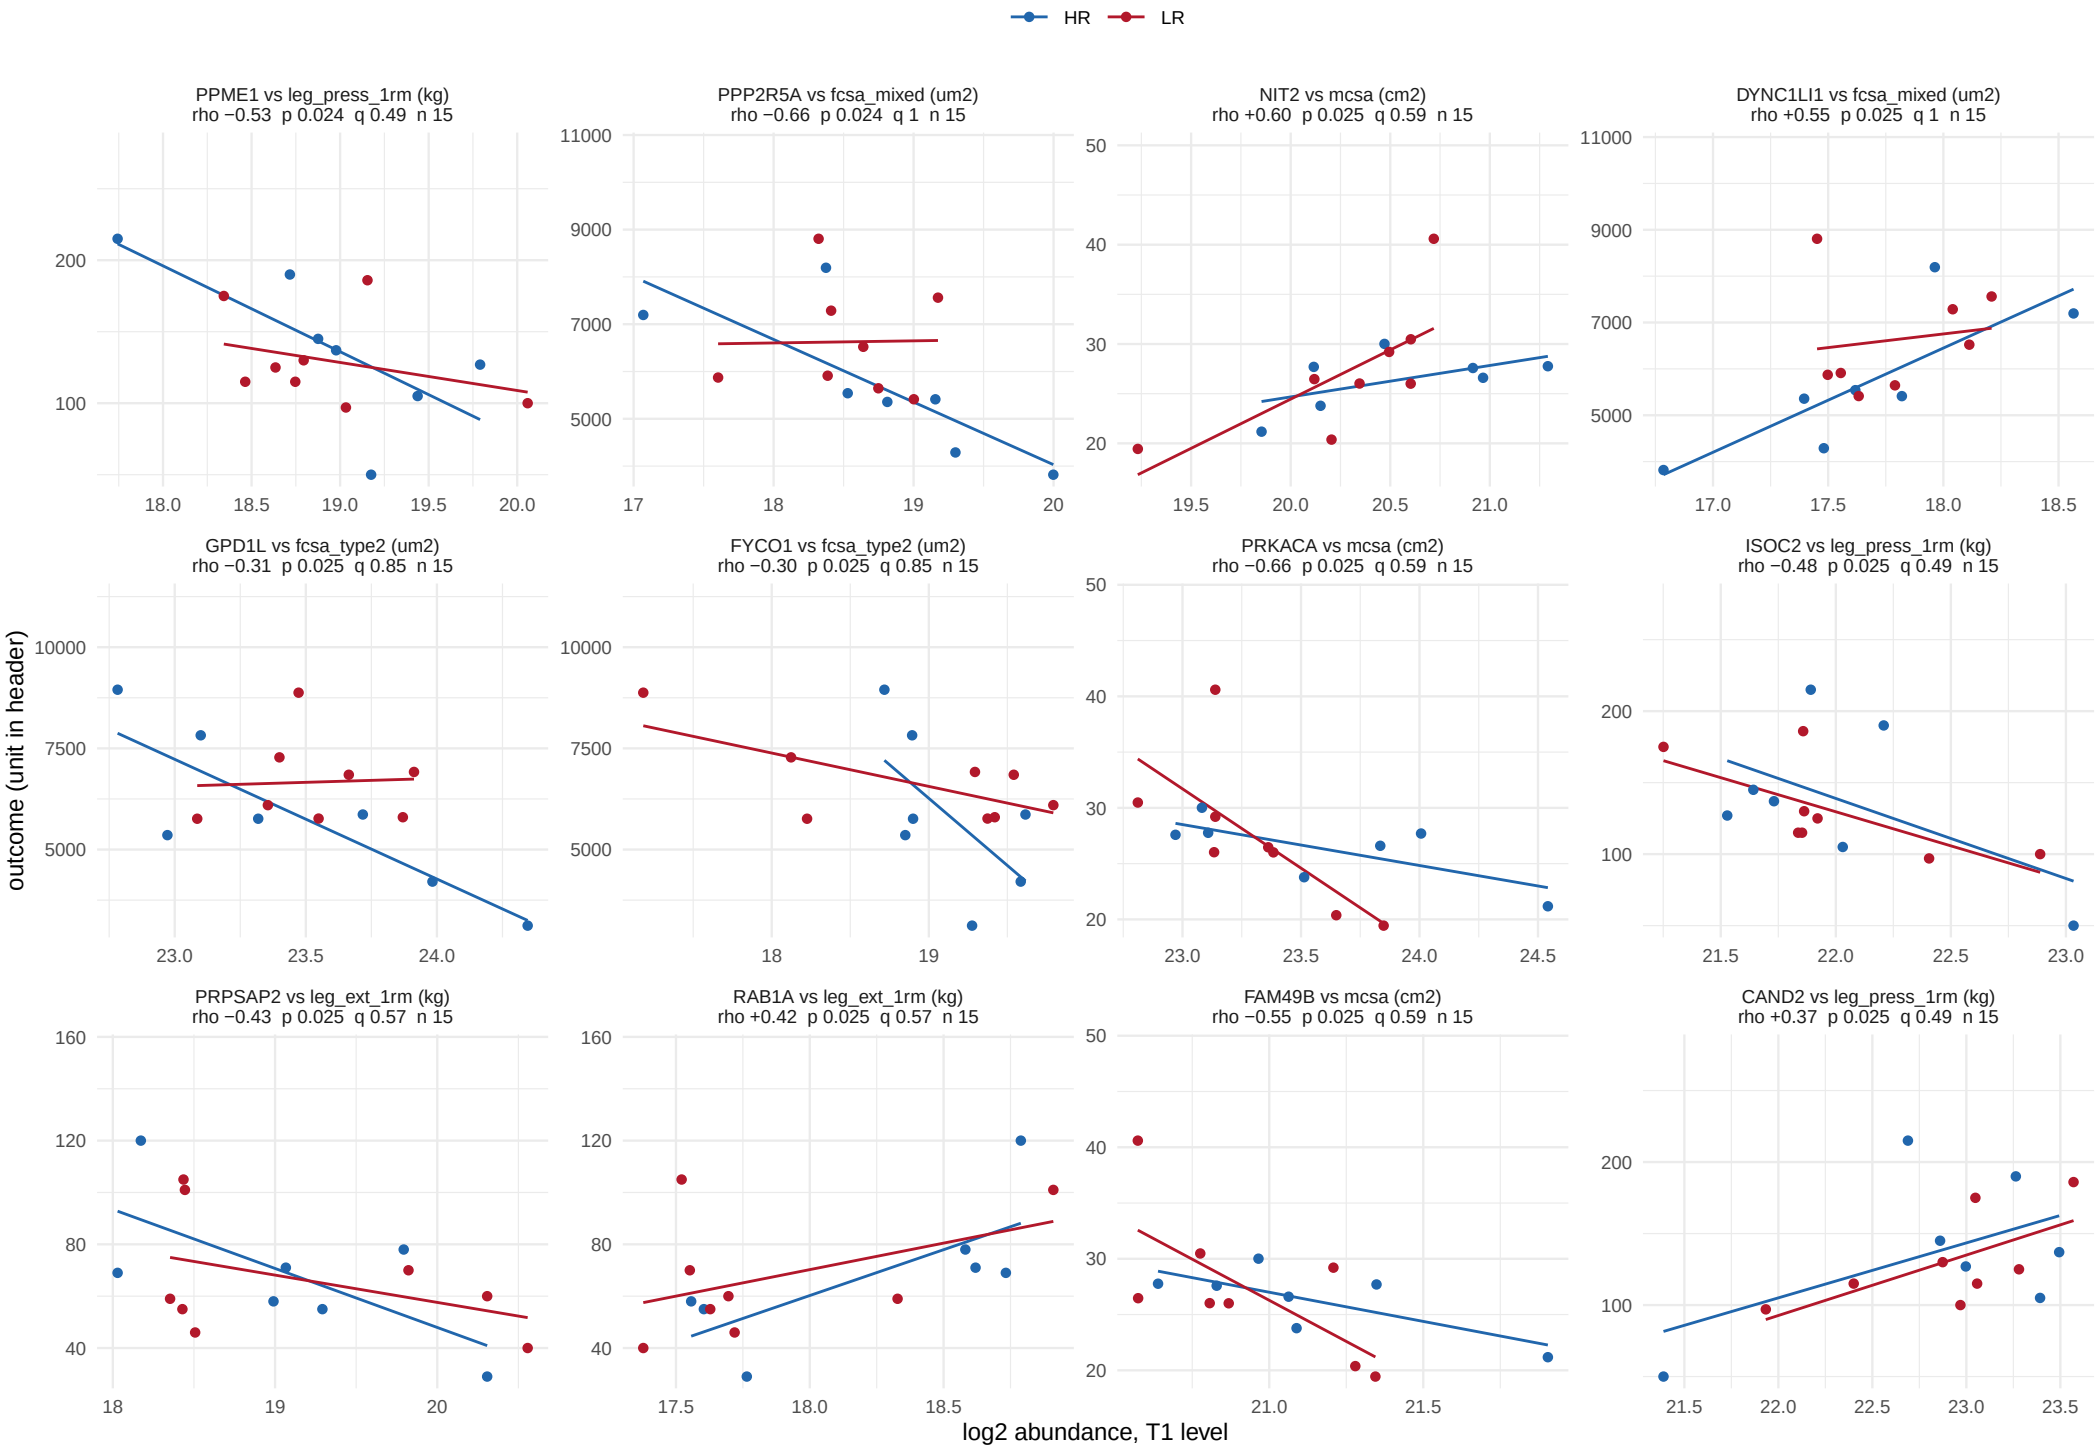

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


693 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 32 of 58.

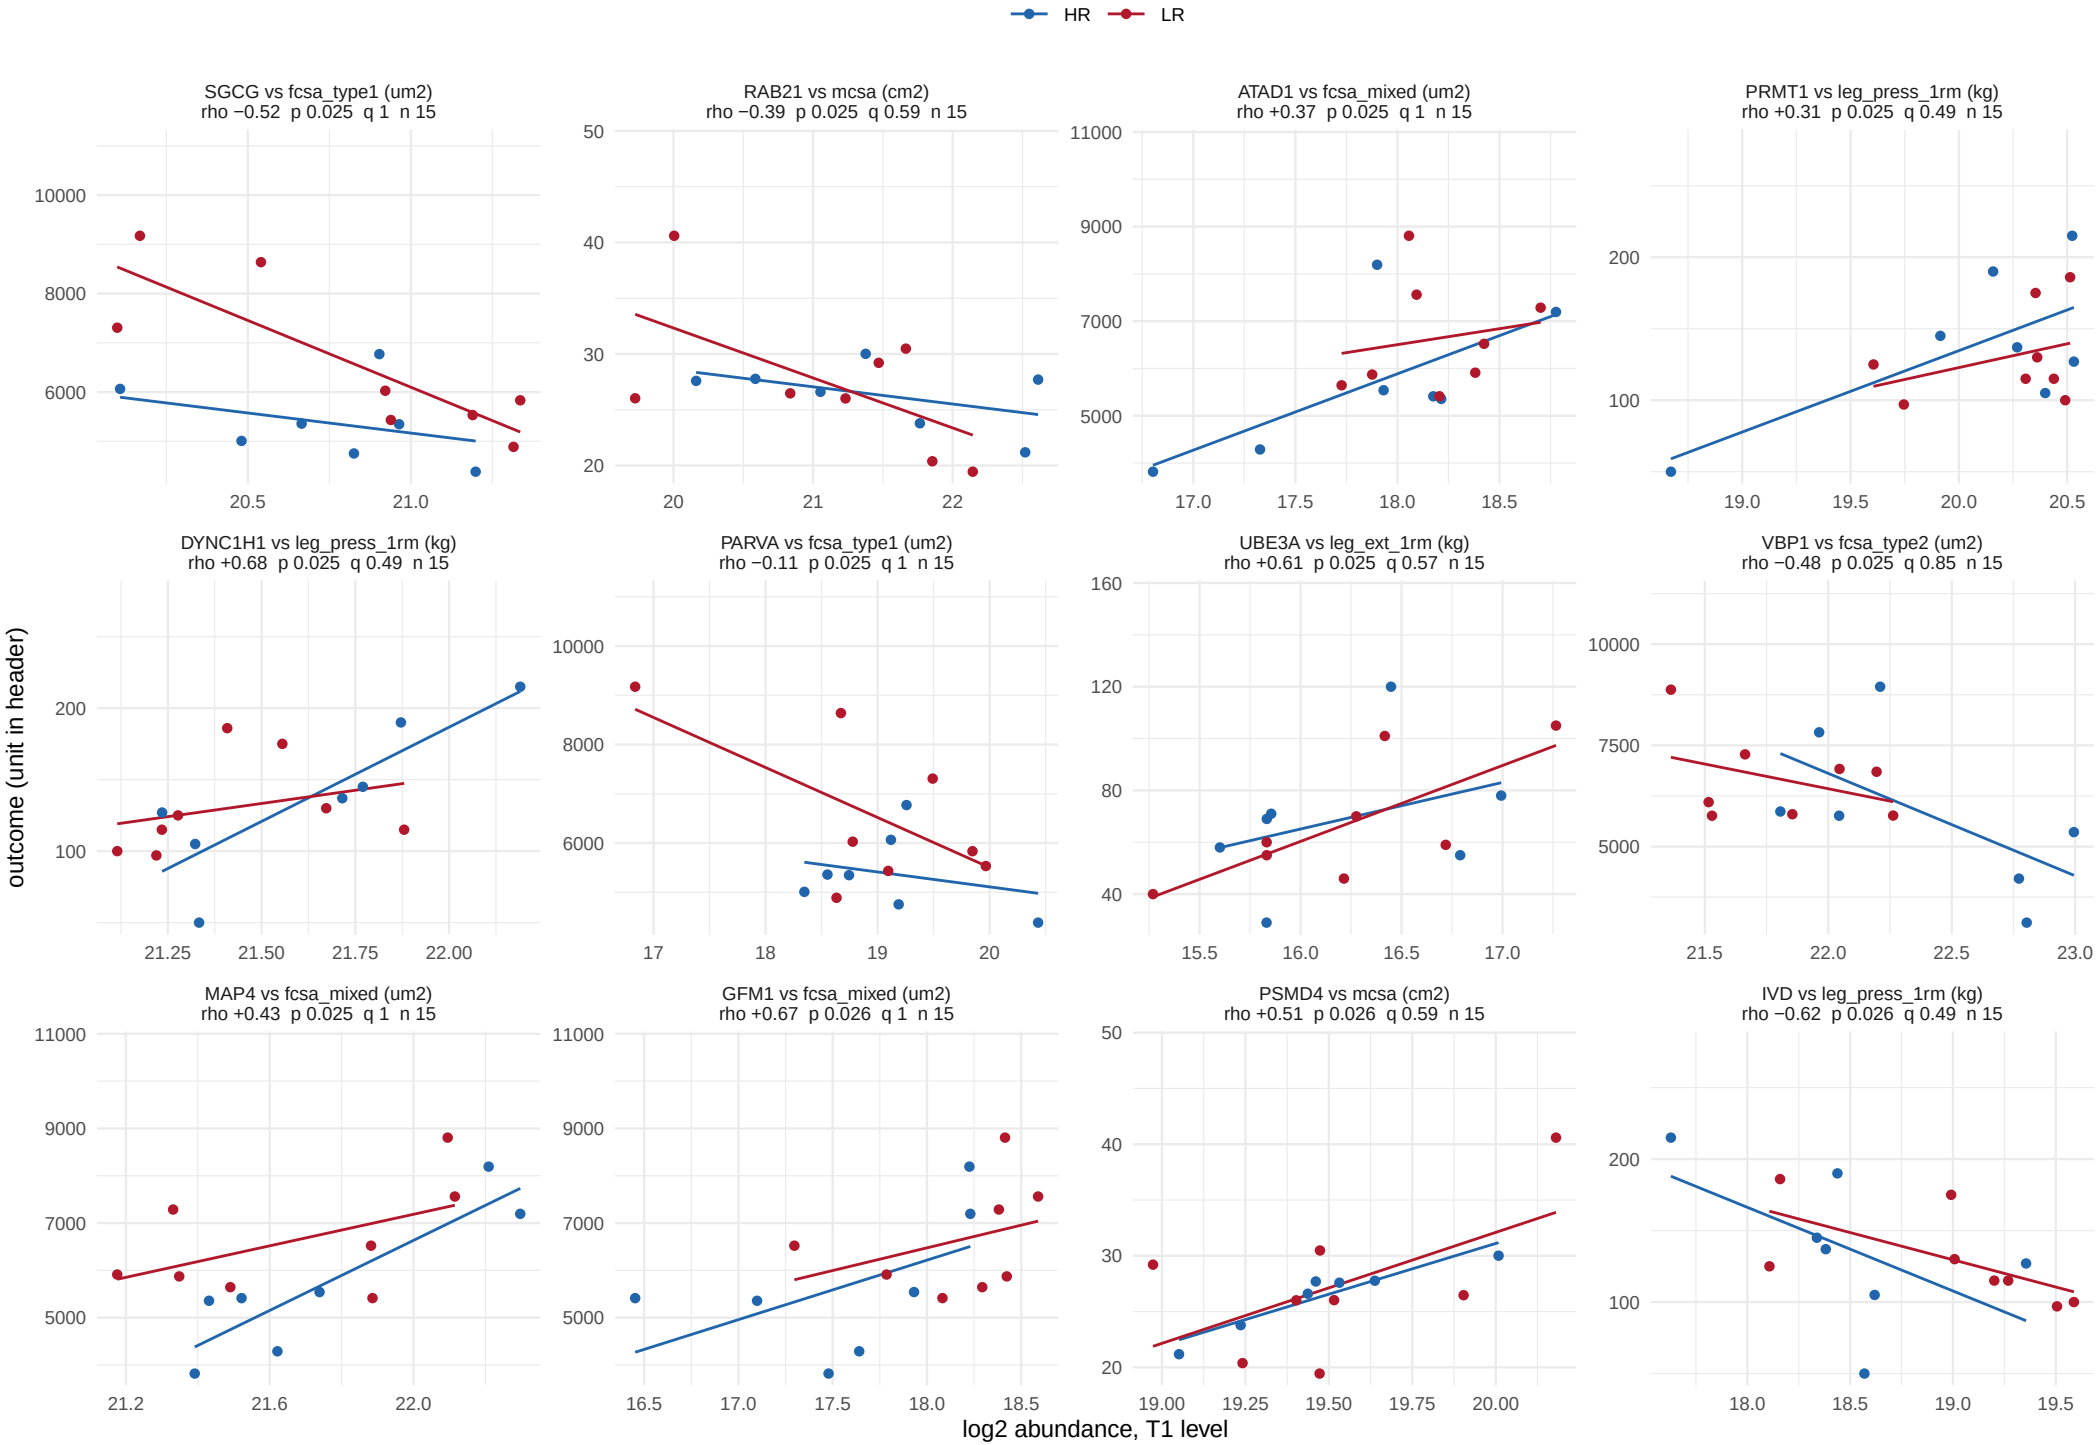

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


693 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 33 of 58.

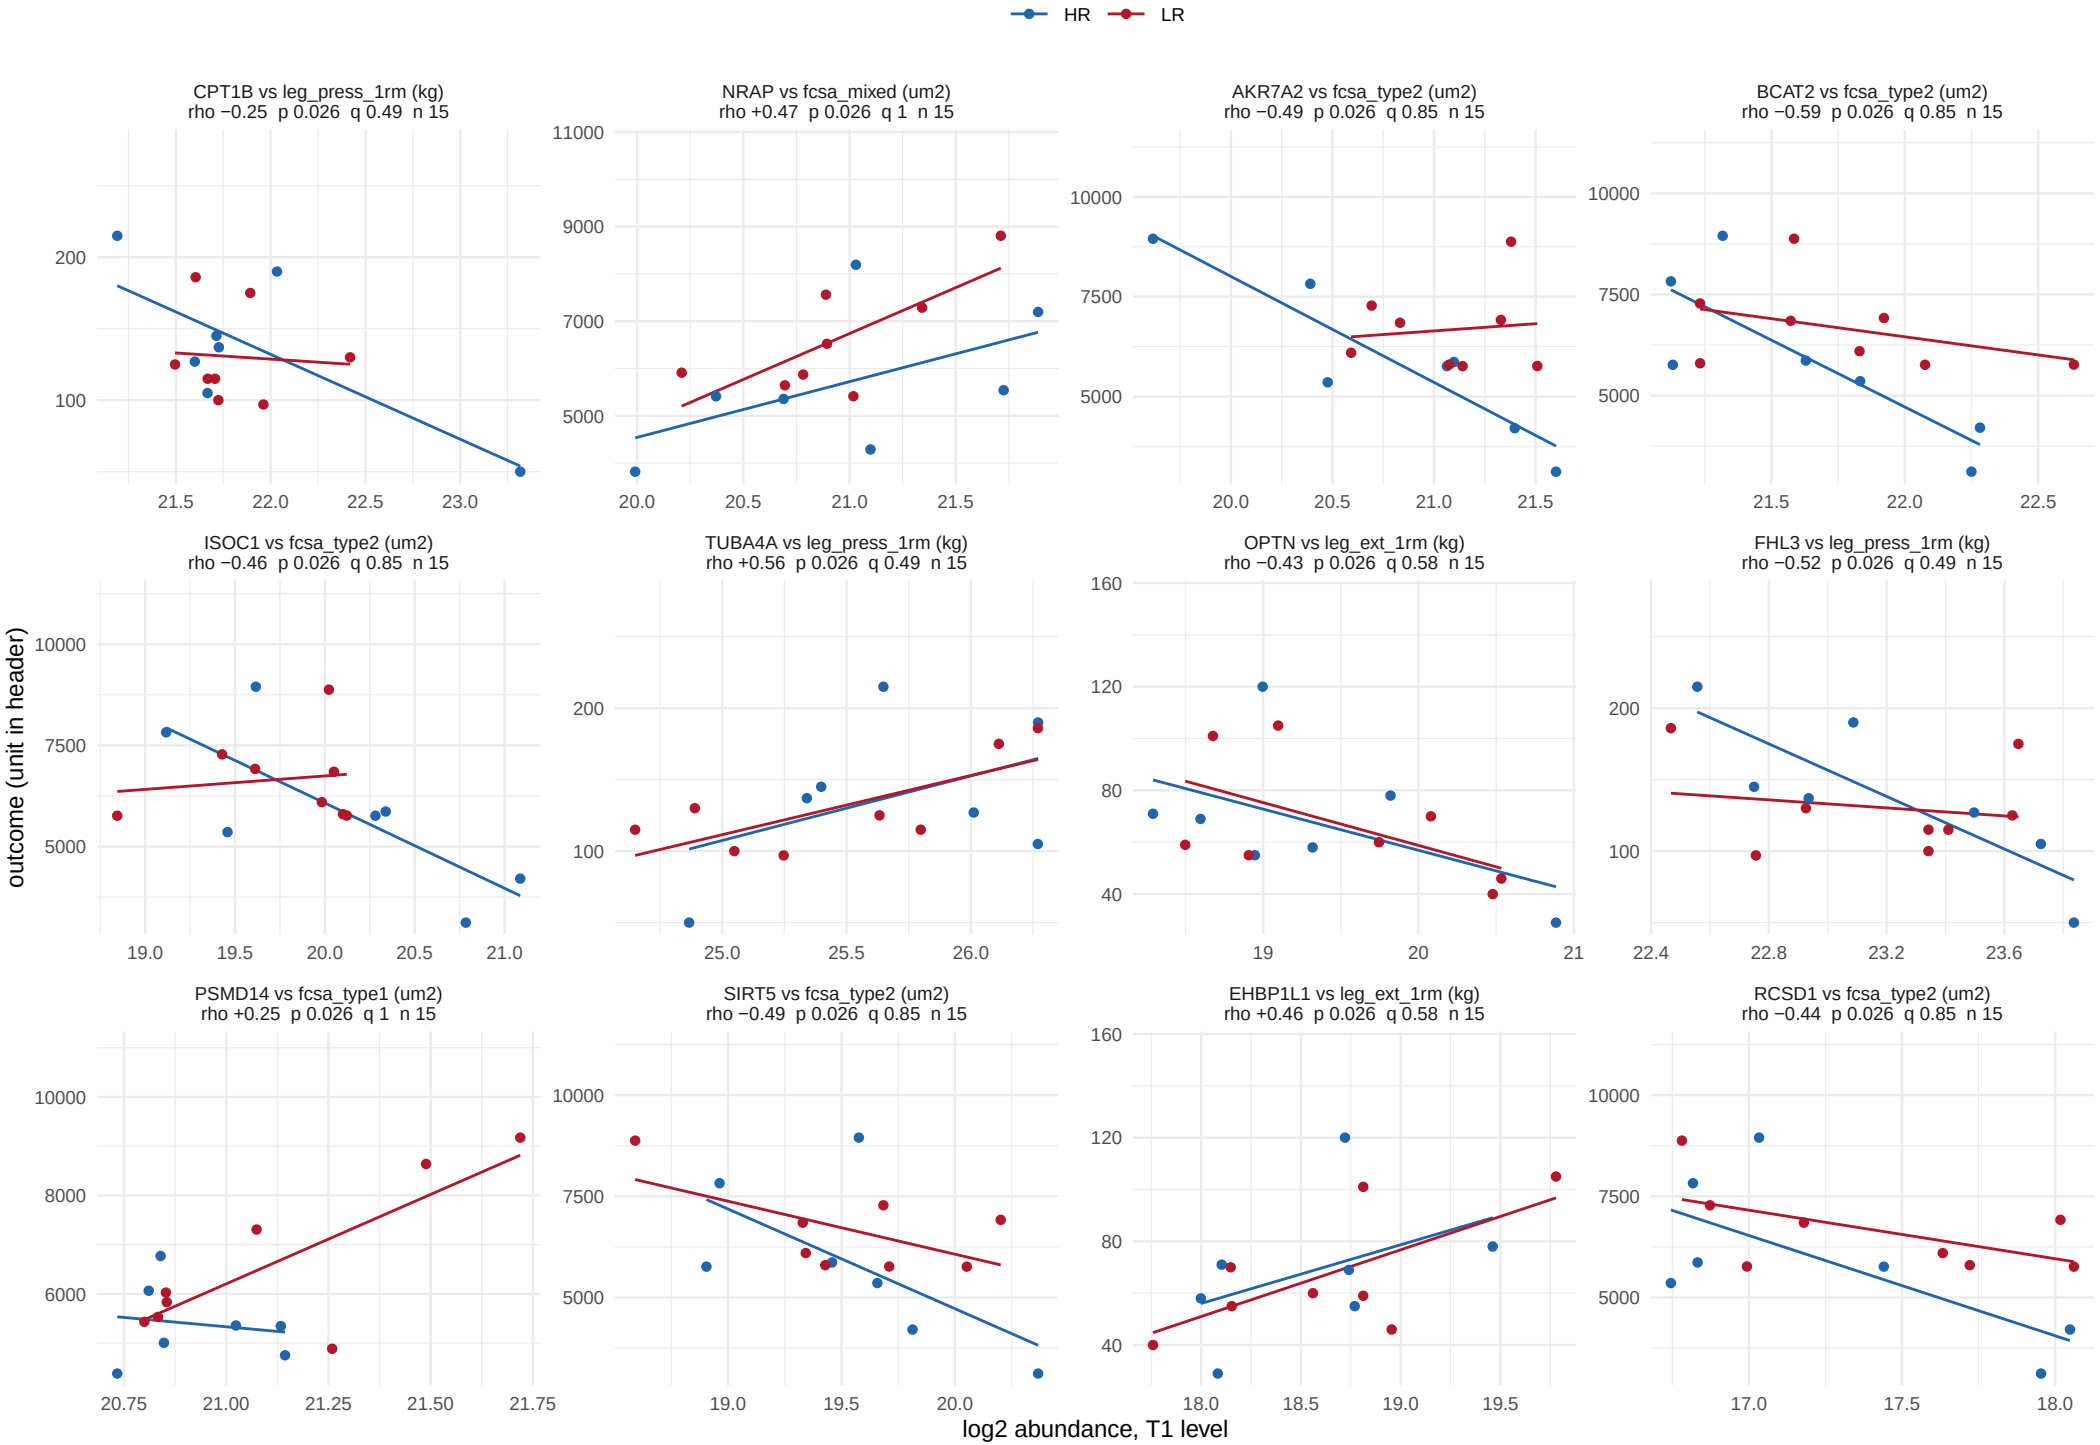

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window

693 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 34 of 58.

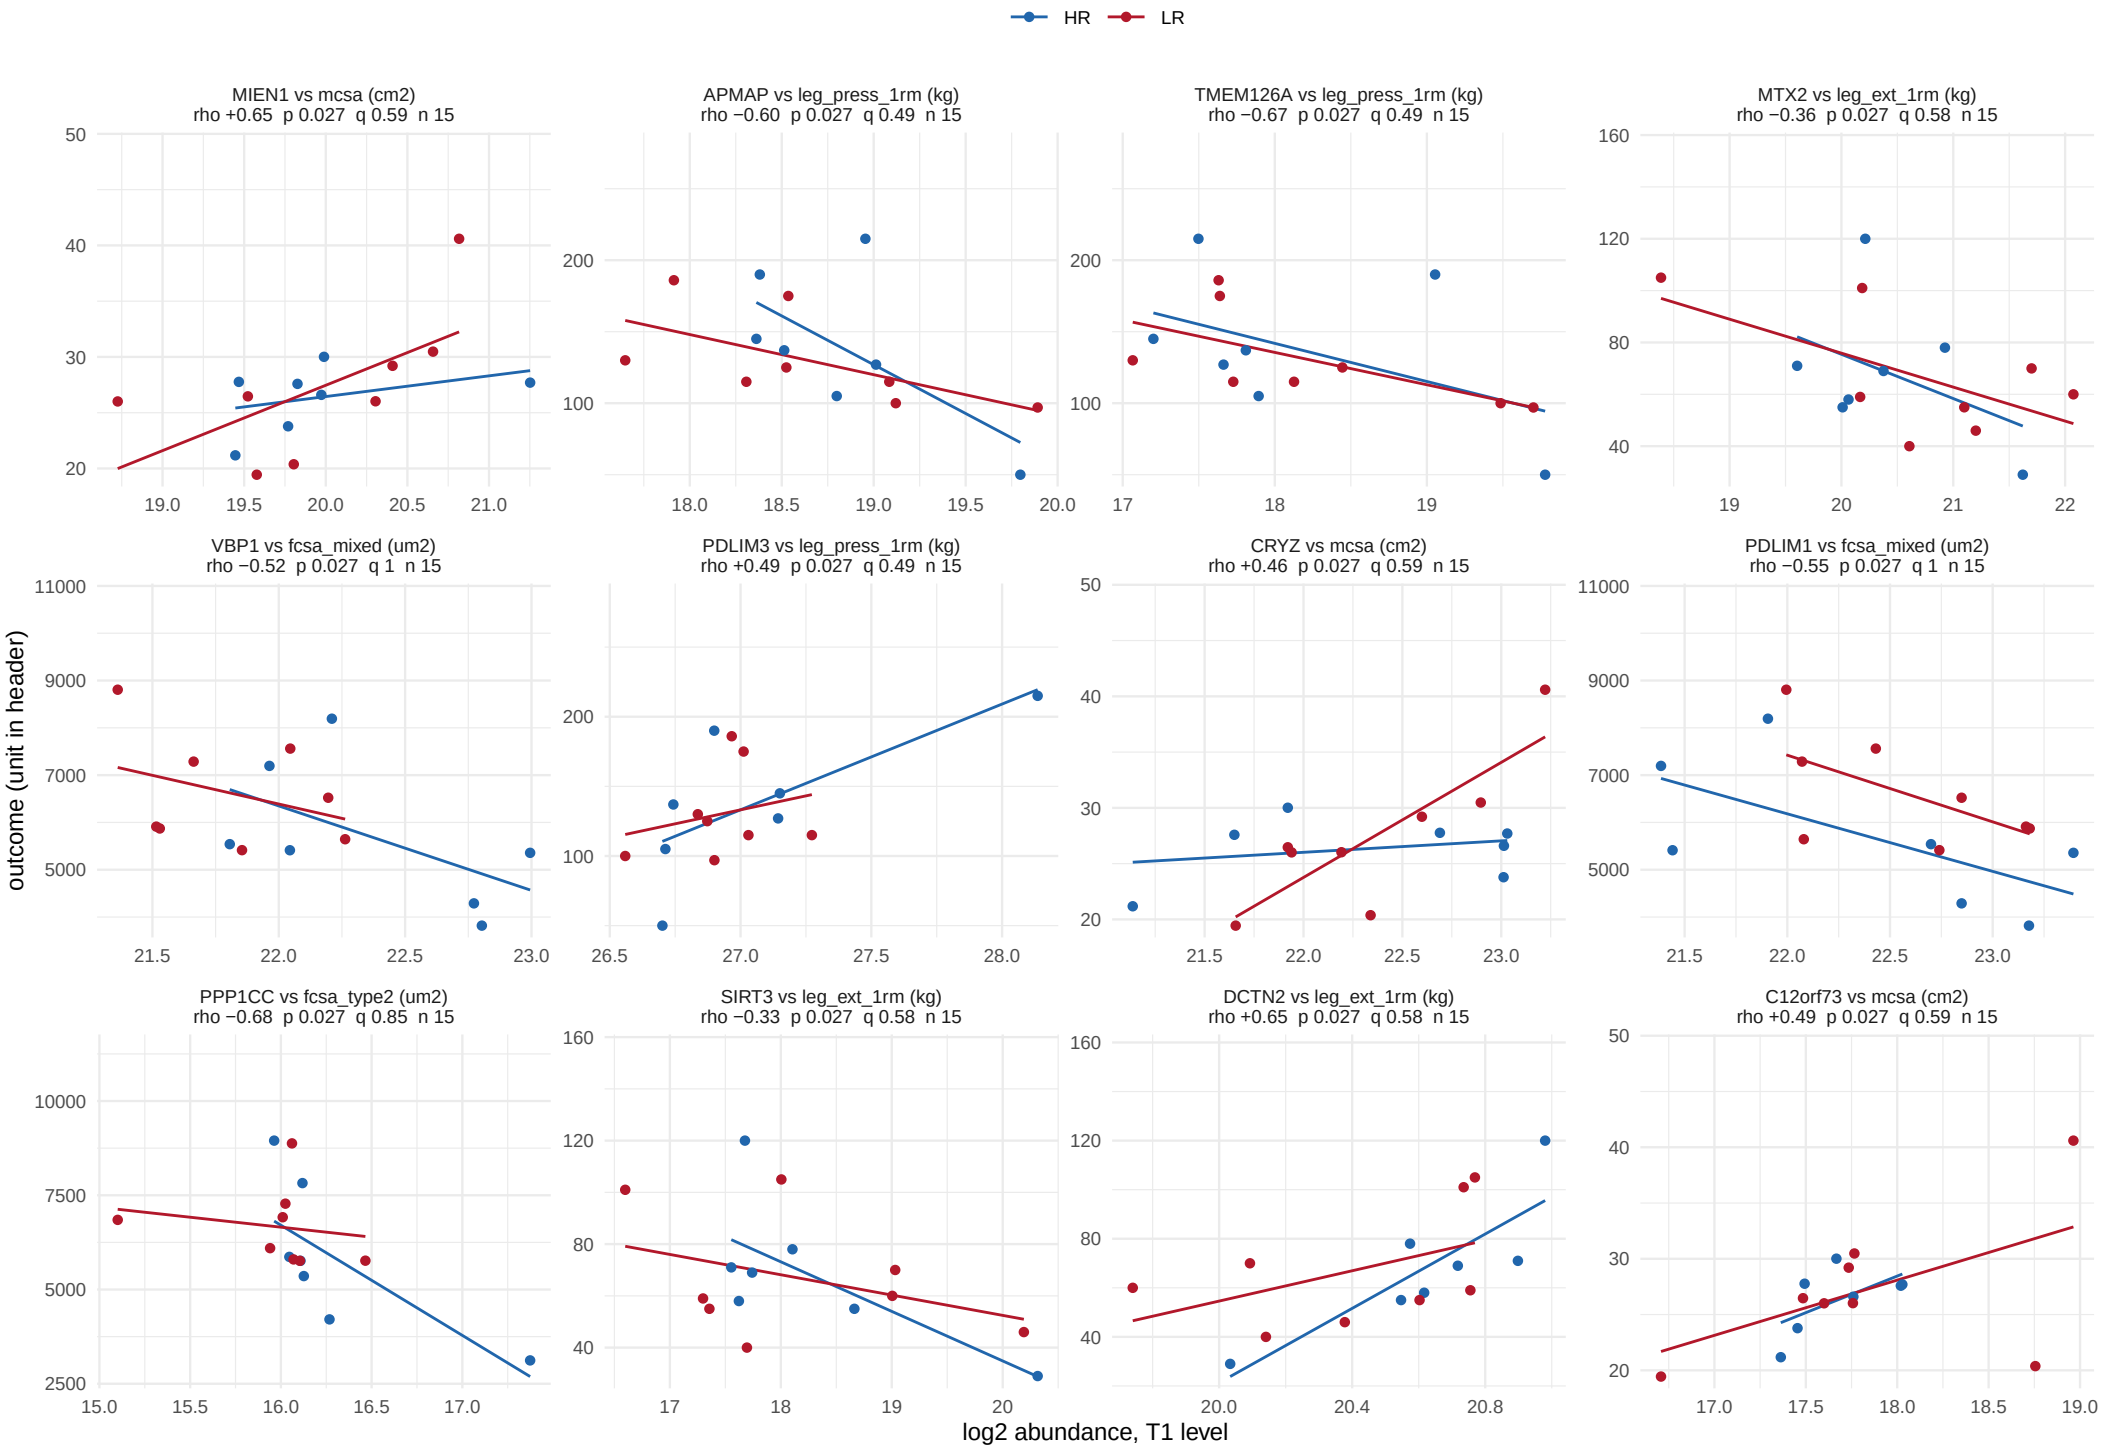

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


693 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 35 of 58.



One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


693 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 36 of 58.

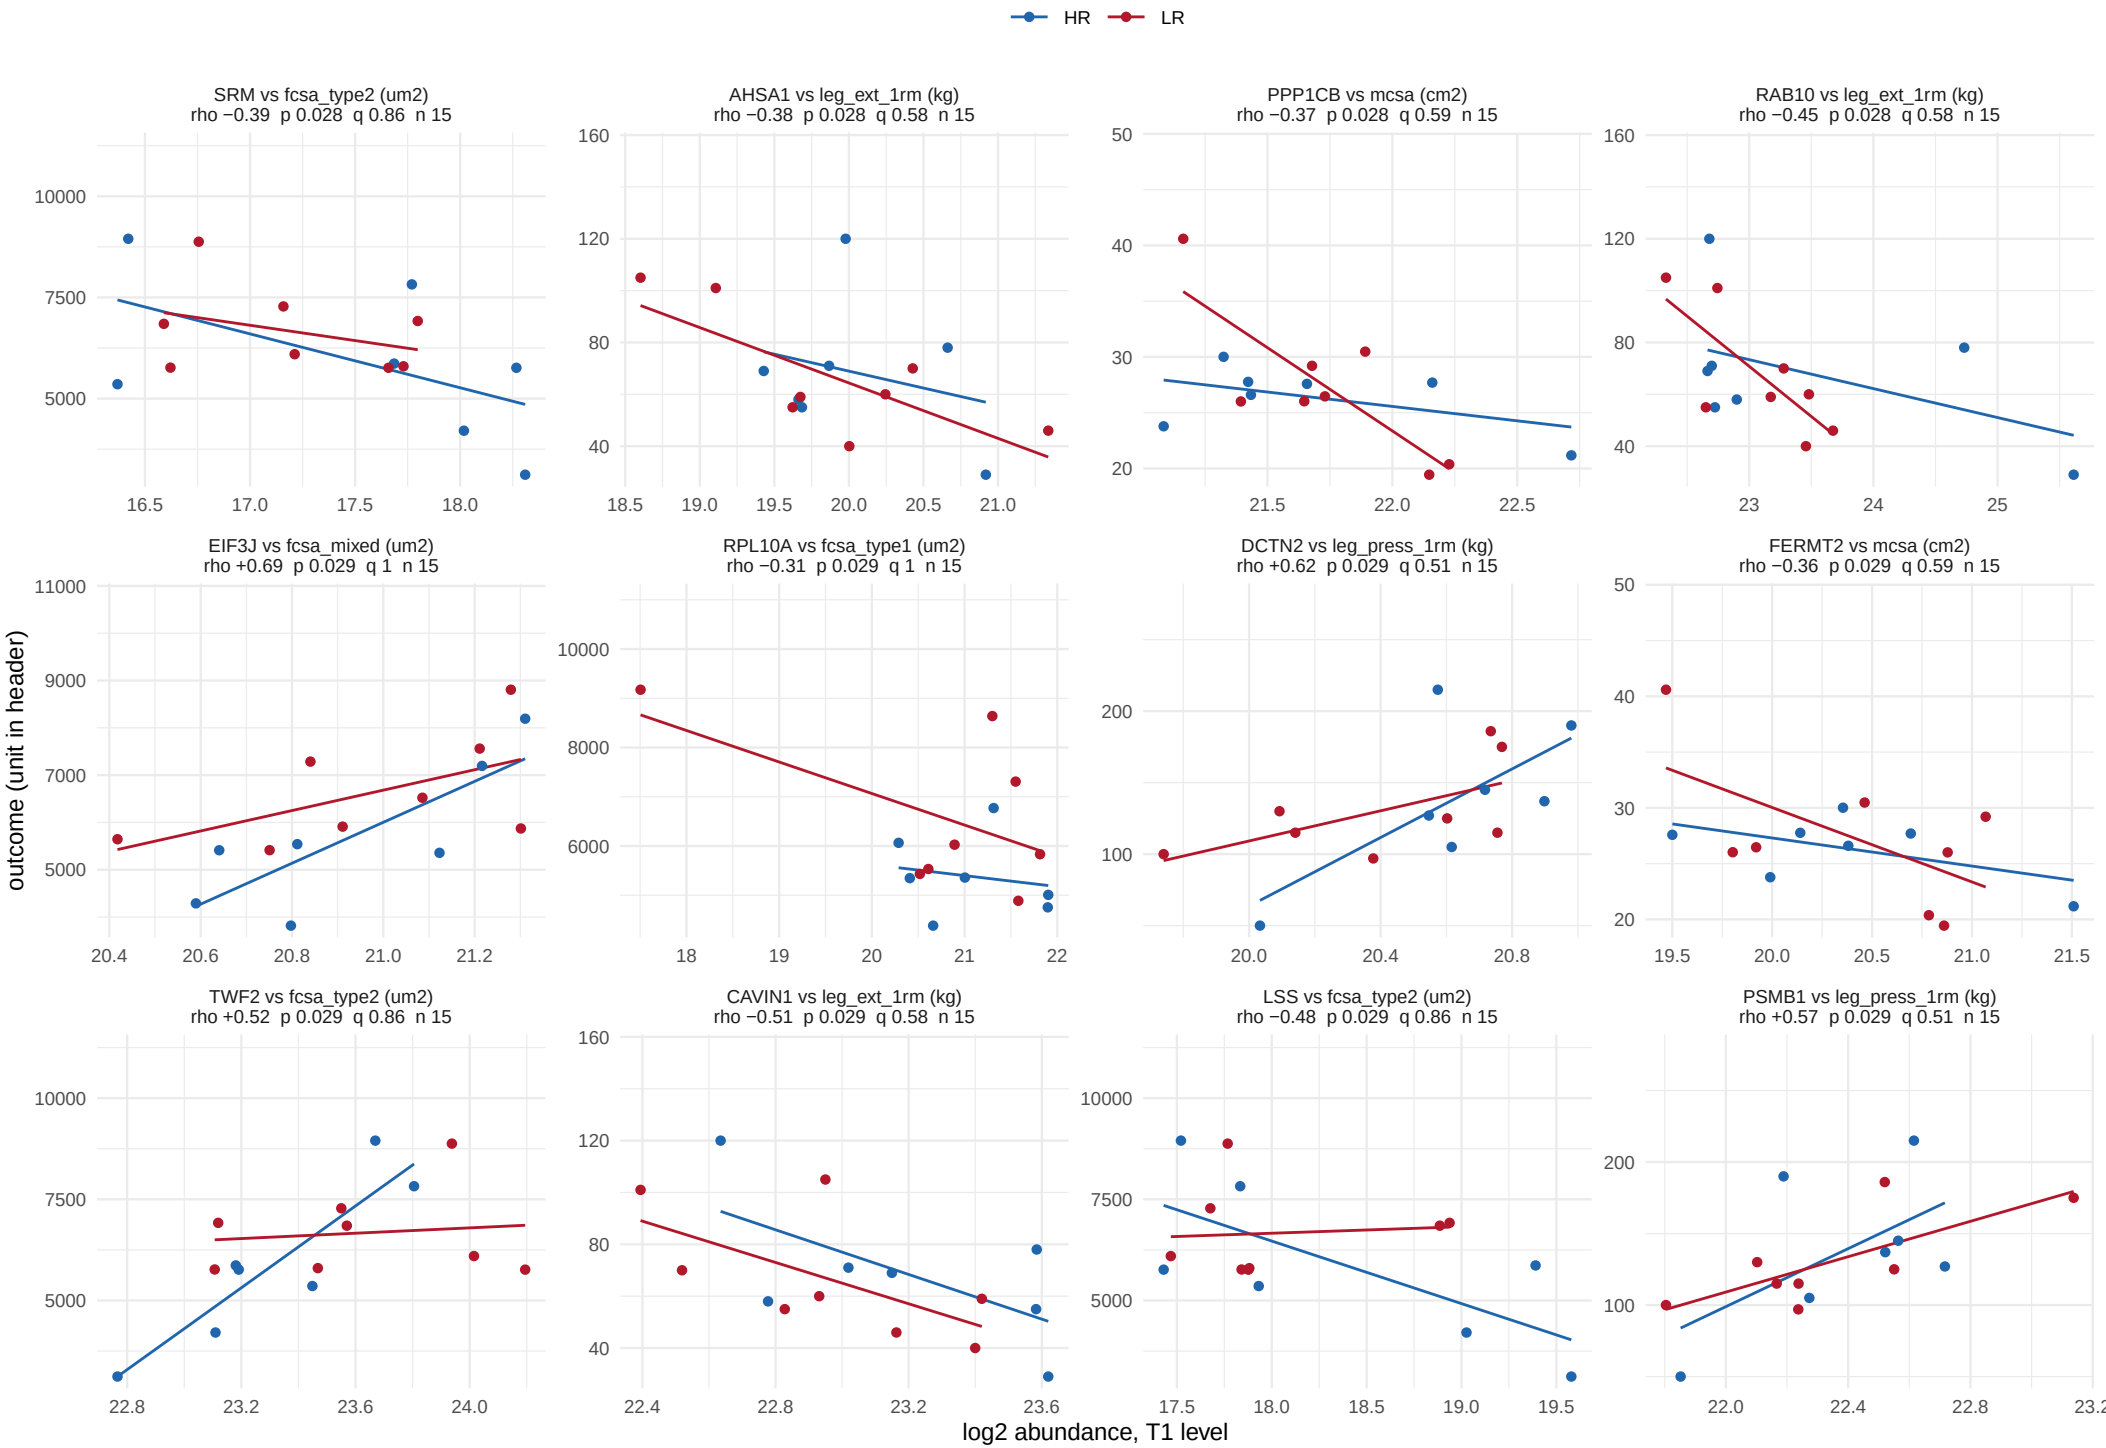

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


693 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 37 of 58.

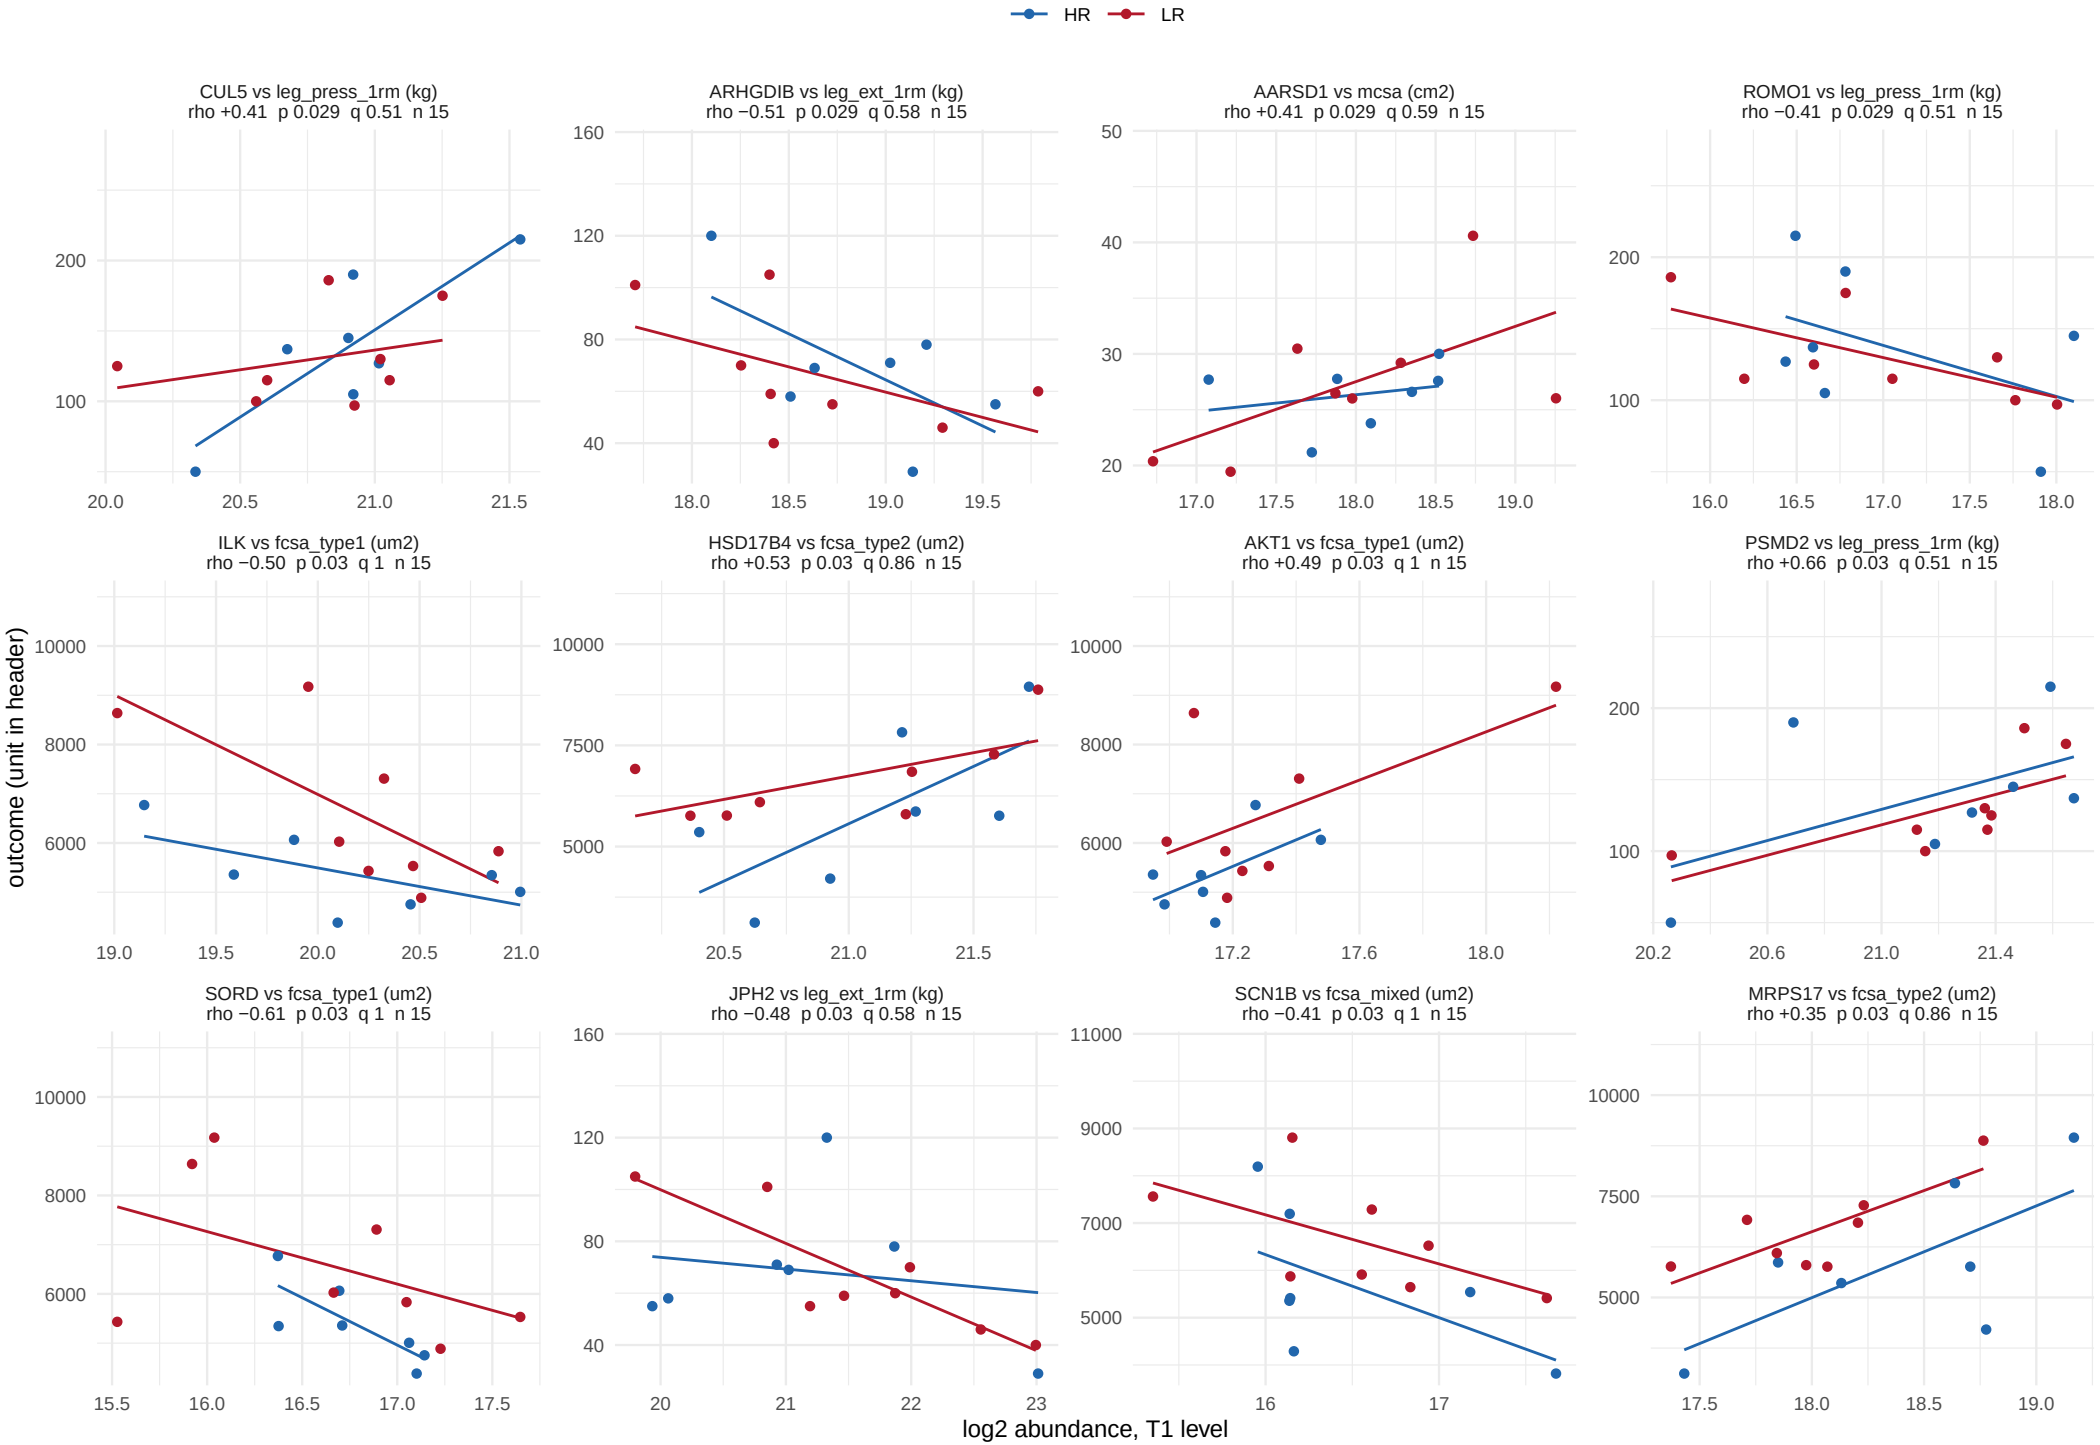

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


693 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 38 of 58.

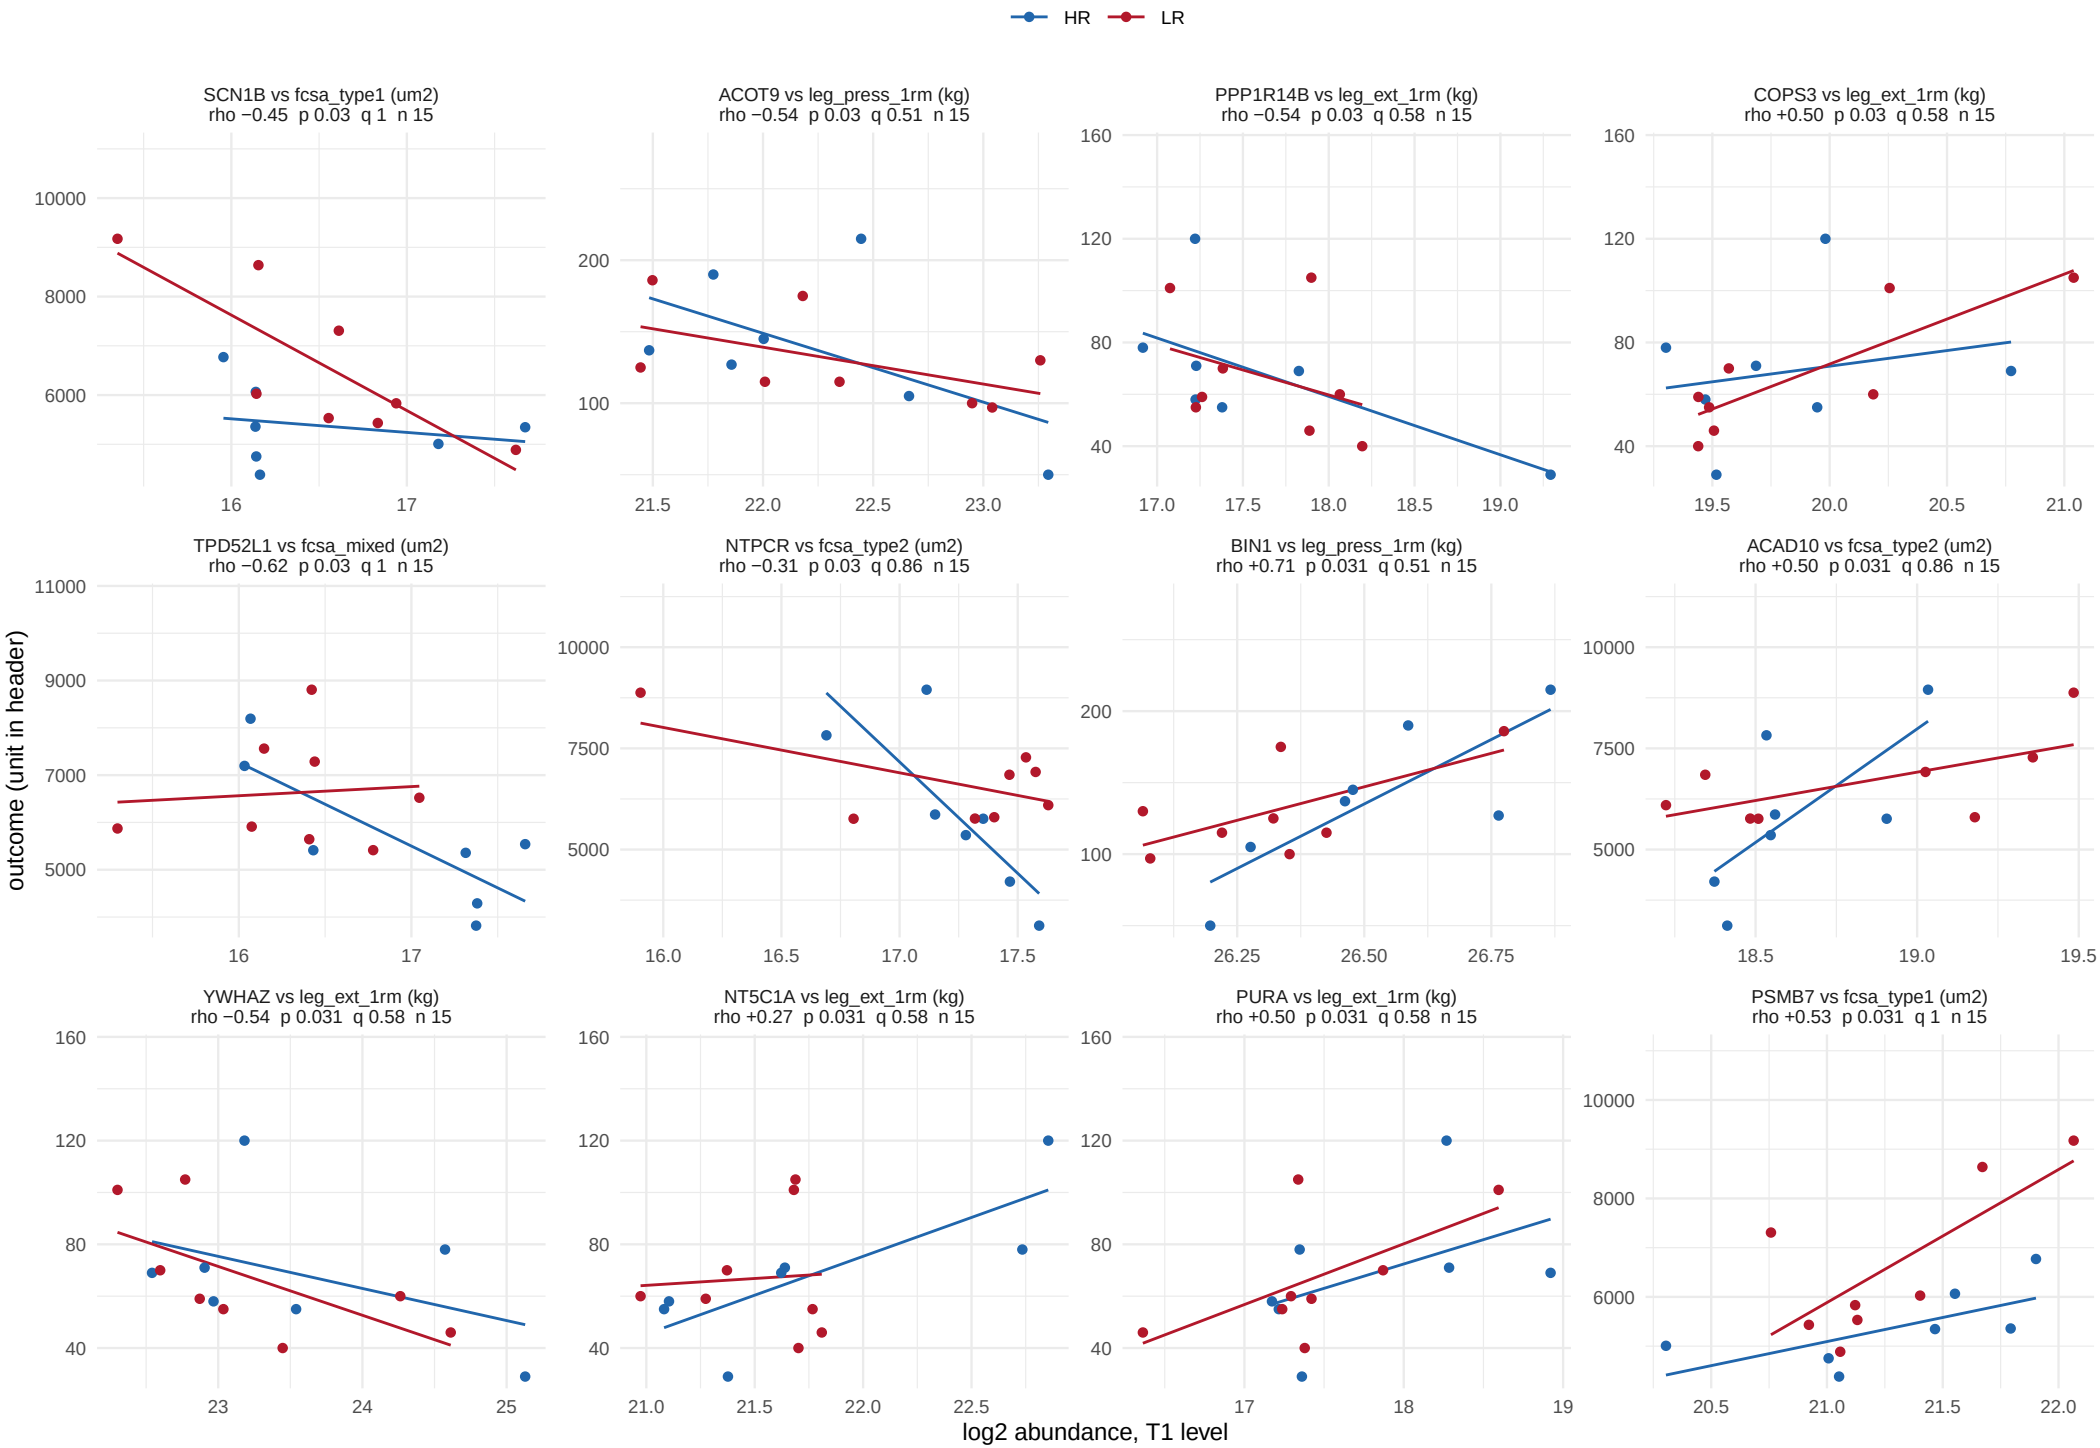

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


693 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 39 of 58.

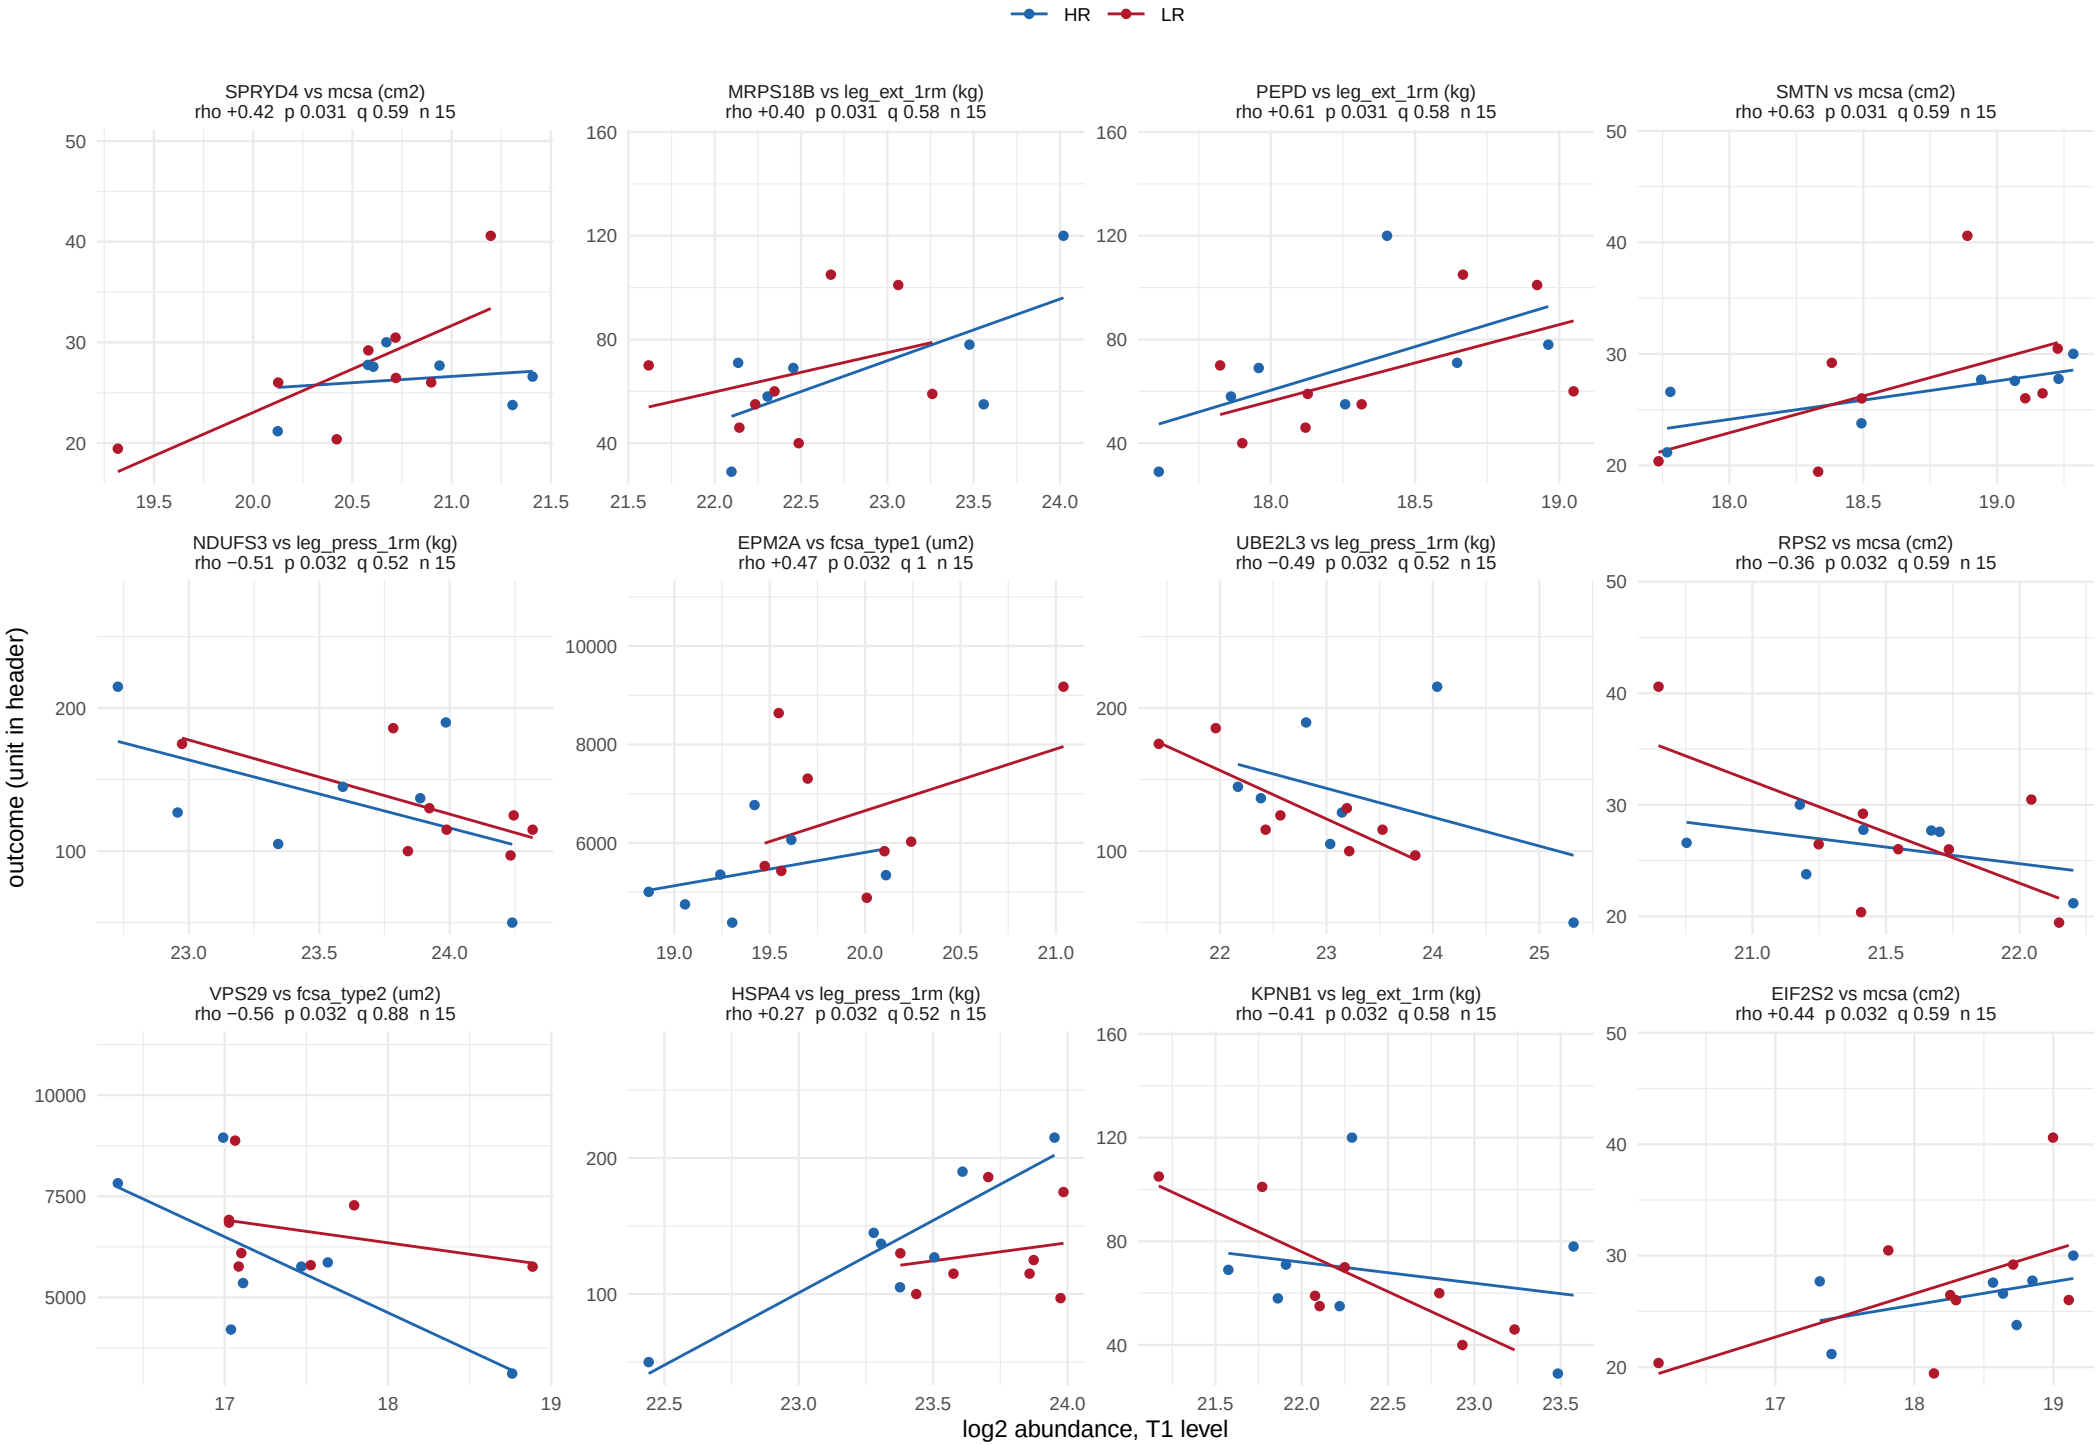

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window

693 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 40 of 58.

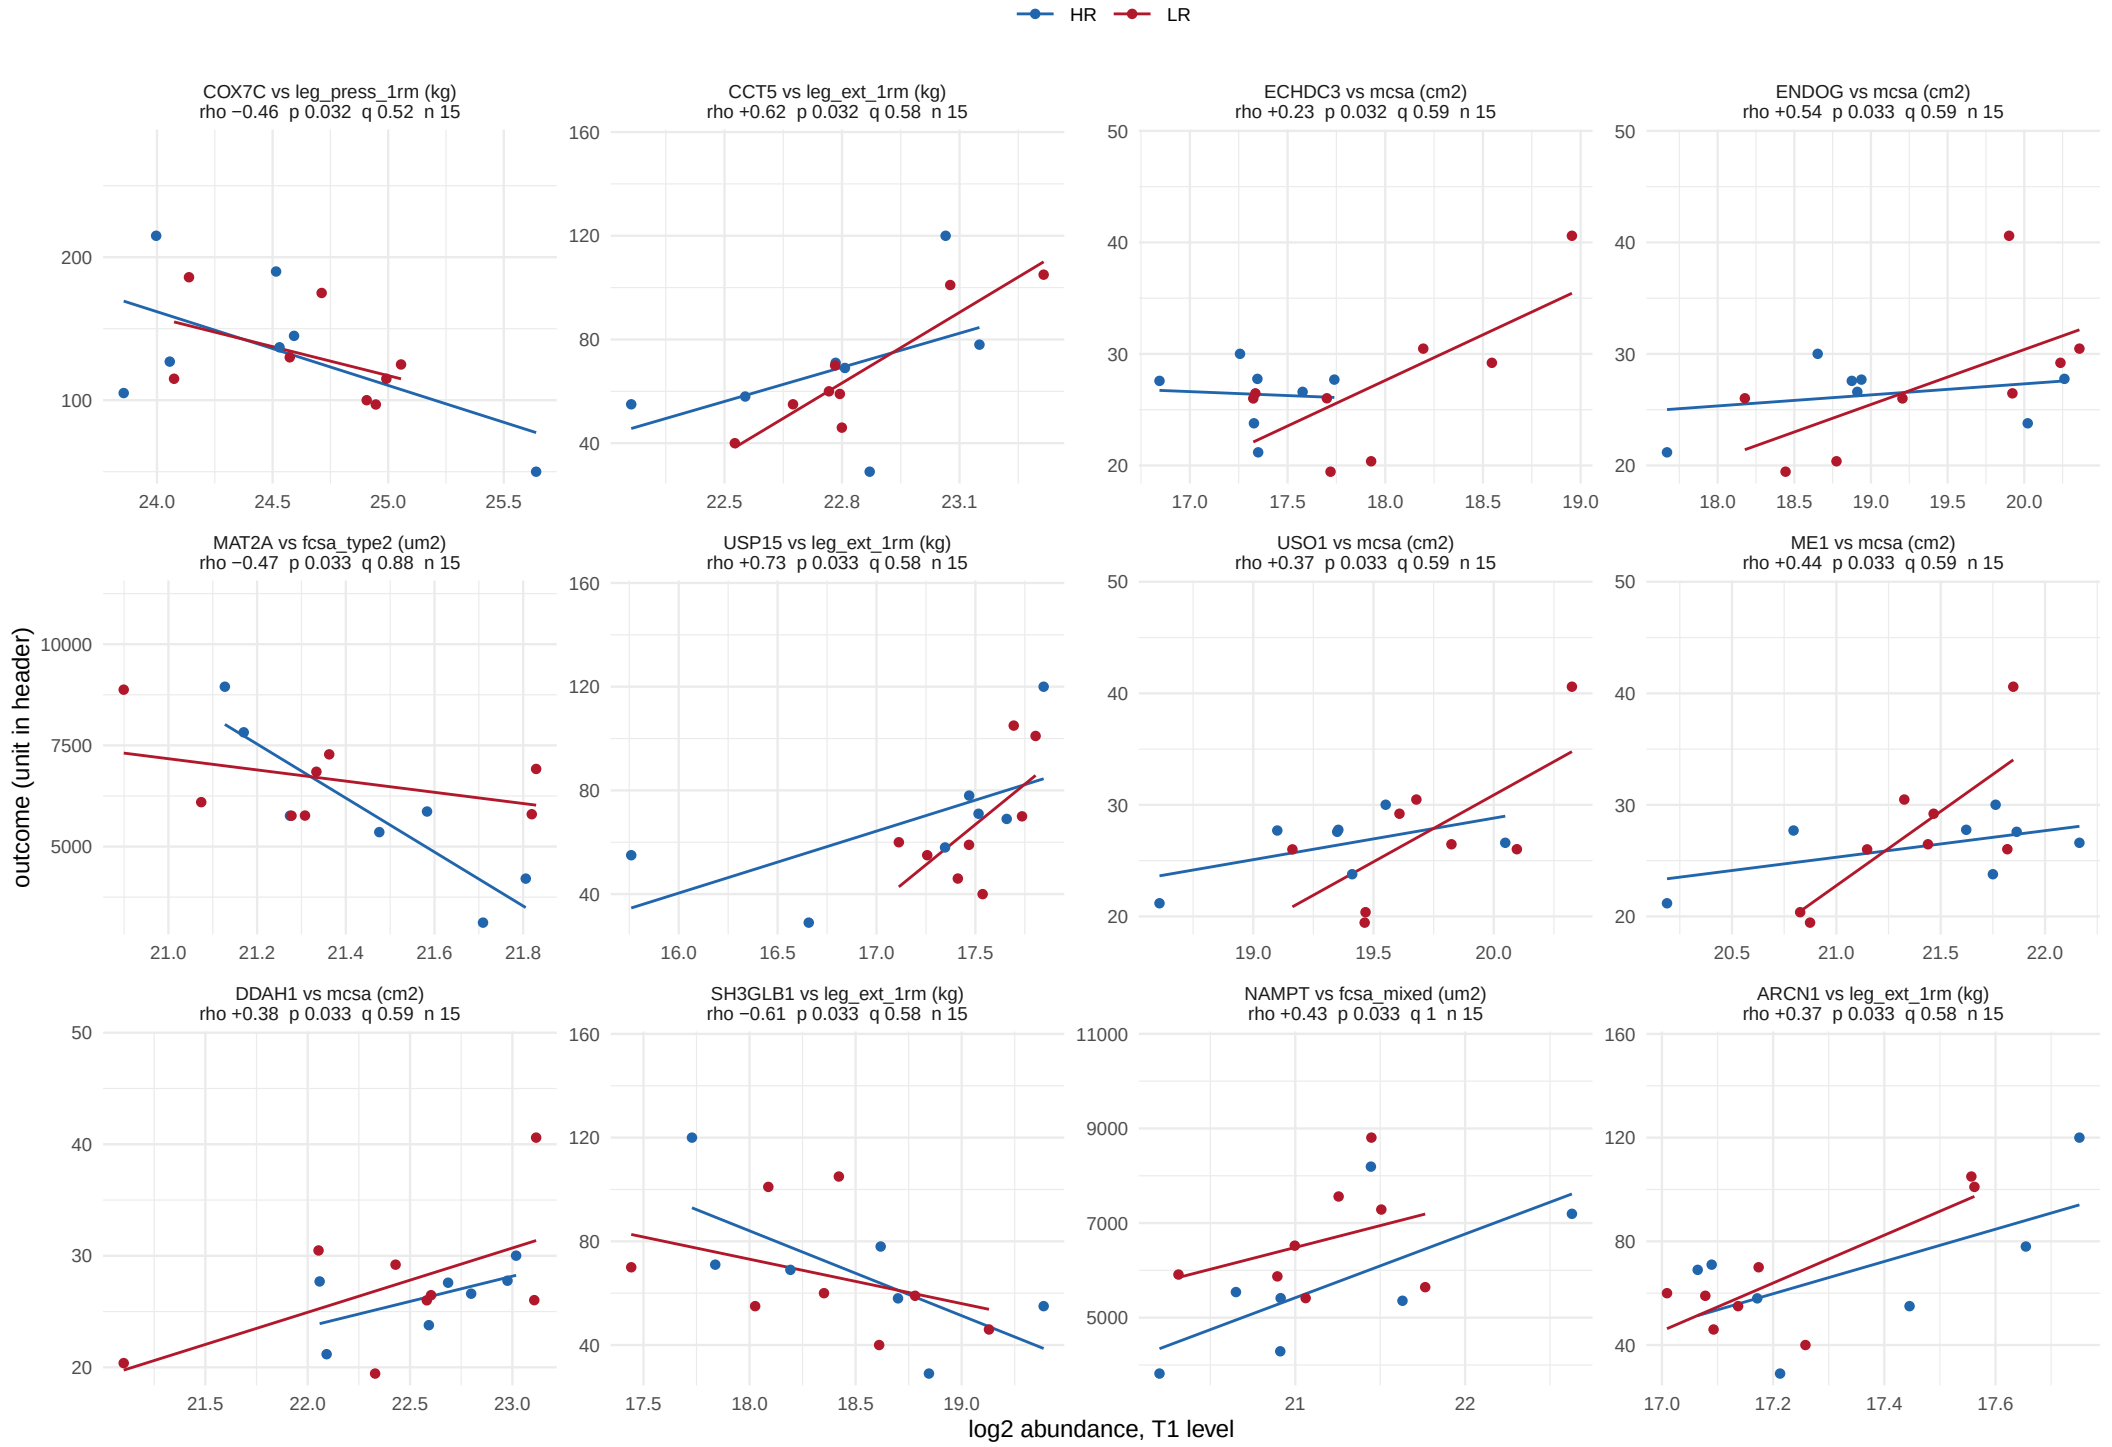

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


693 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 41 of 58.



One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


693 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 42 of 58.

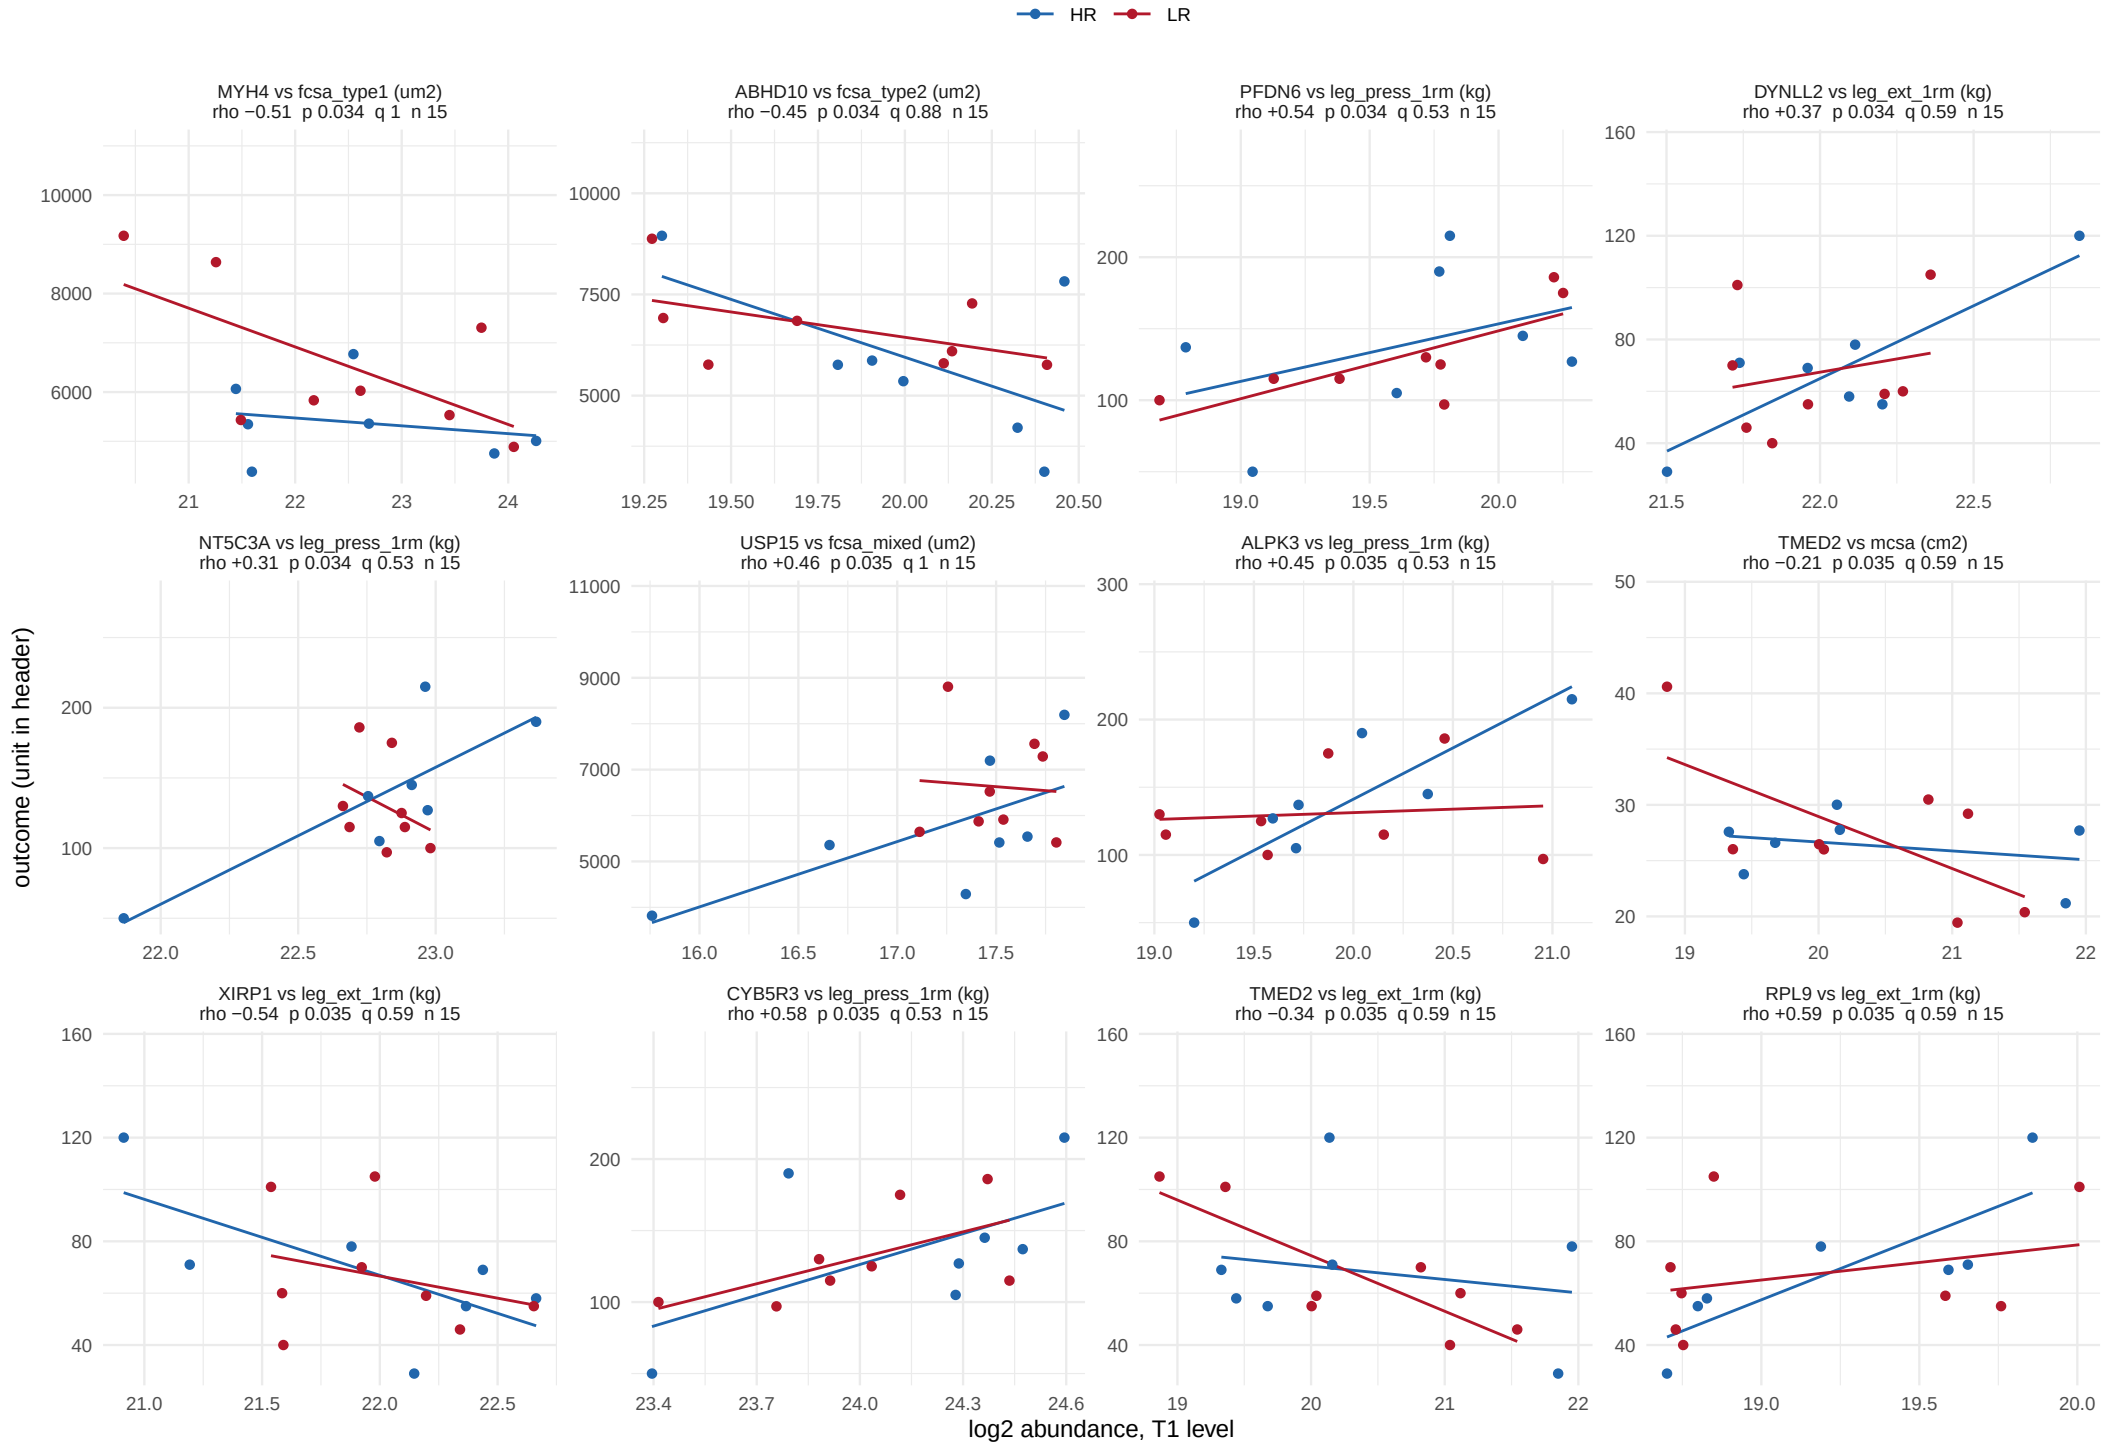

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


693 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 43 of 58.

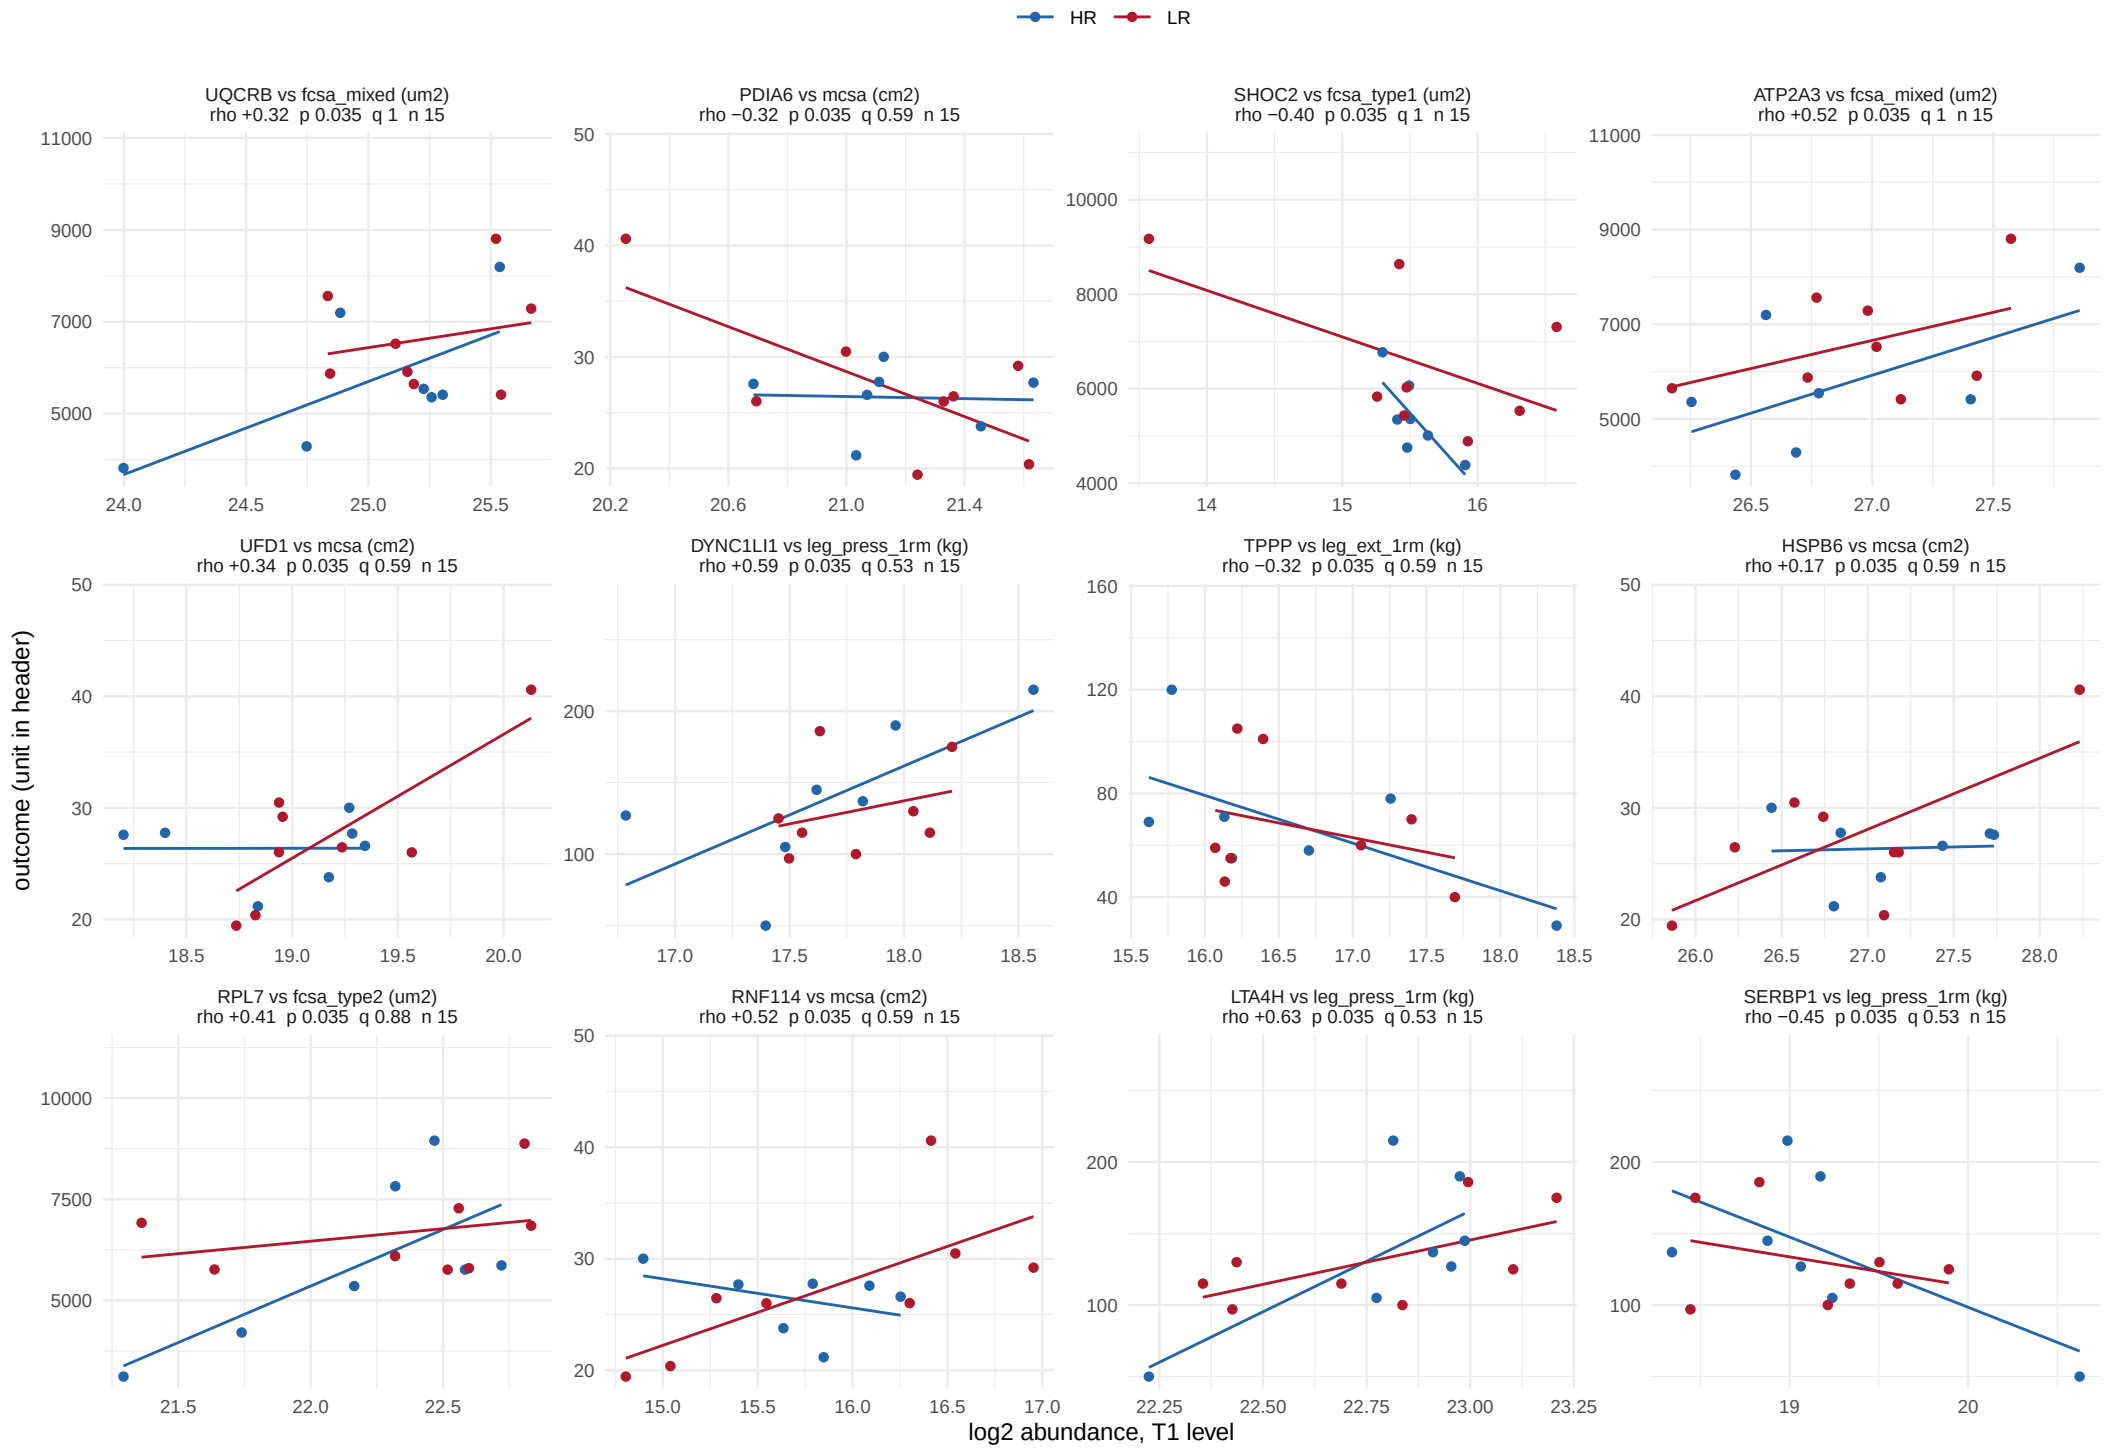

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


693 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 44 of 58.

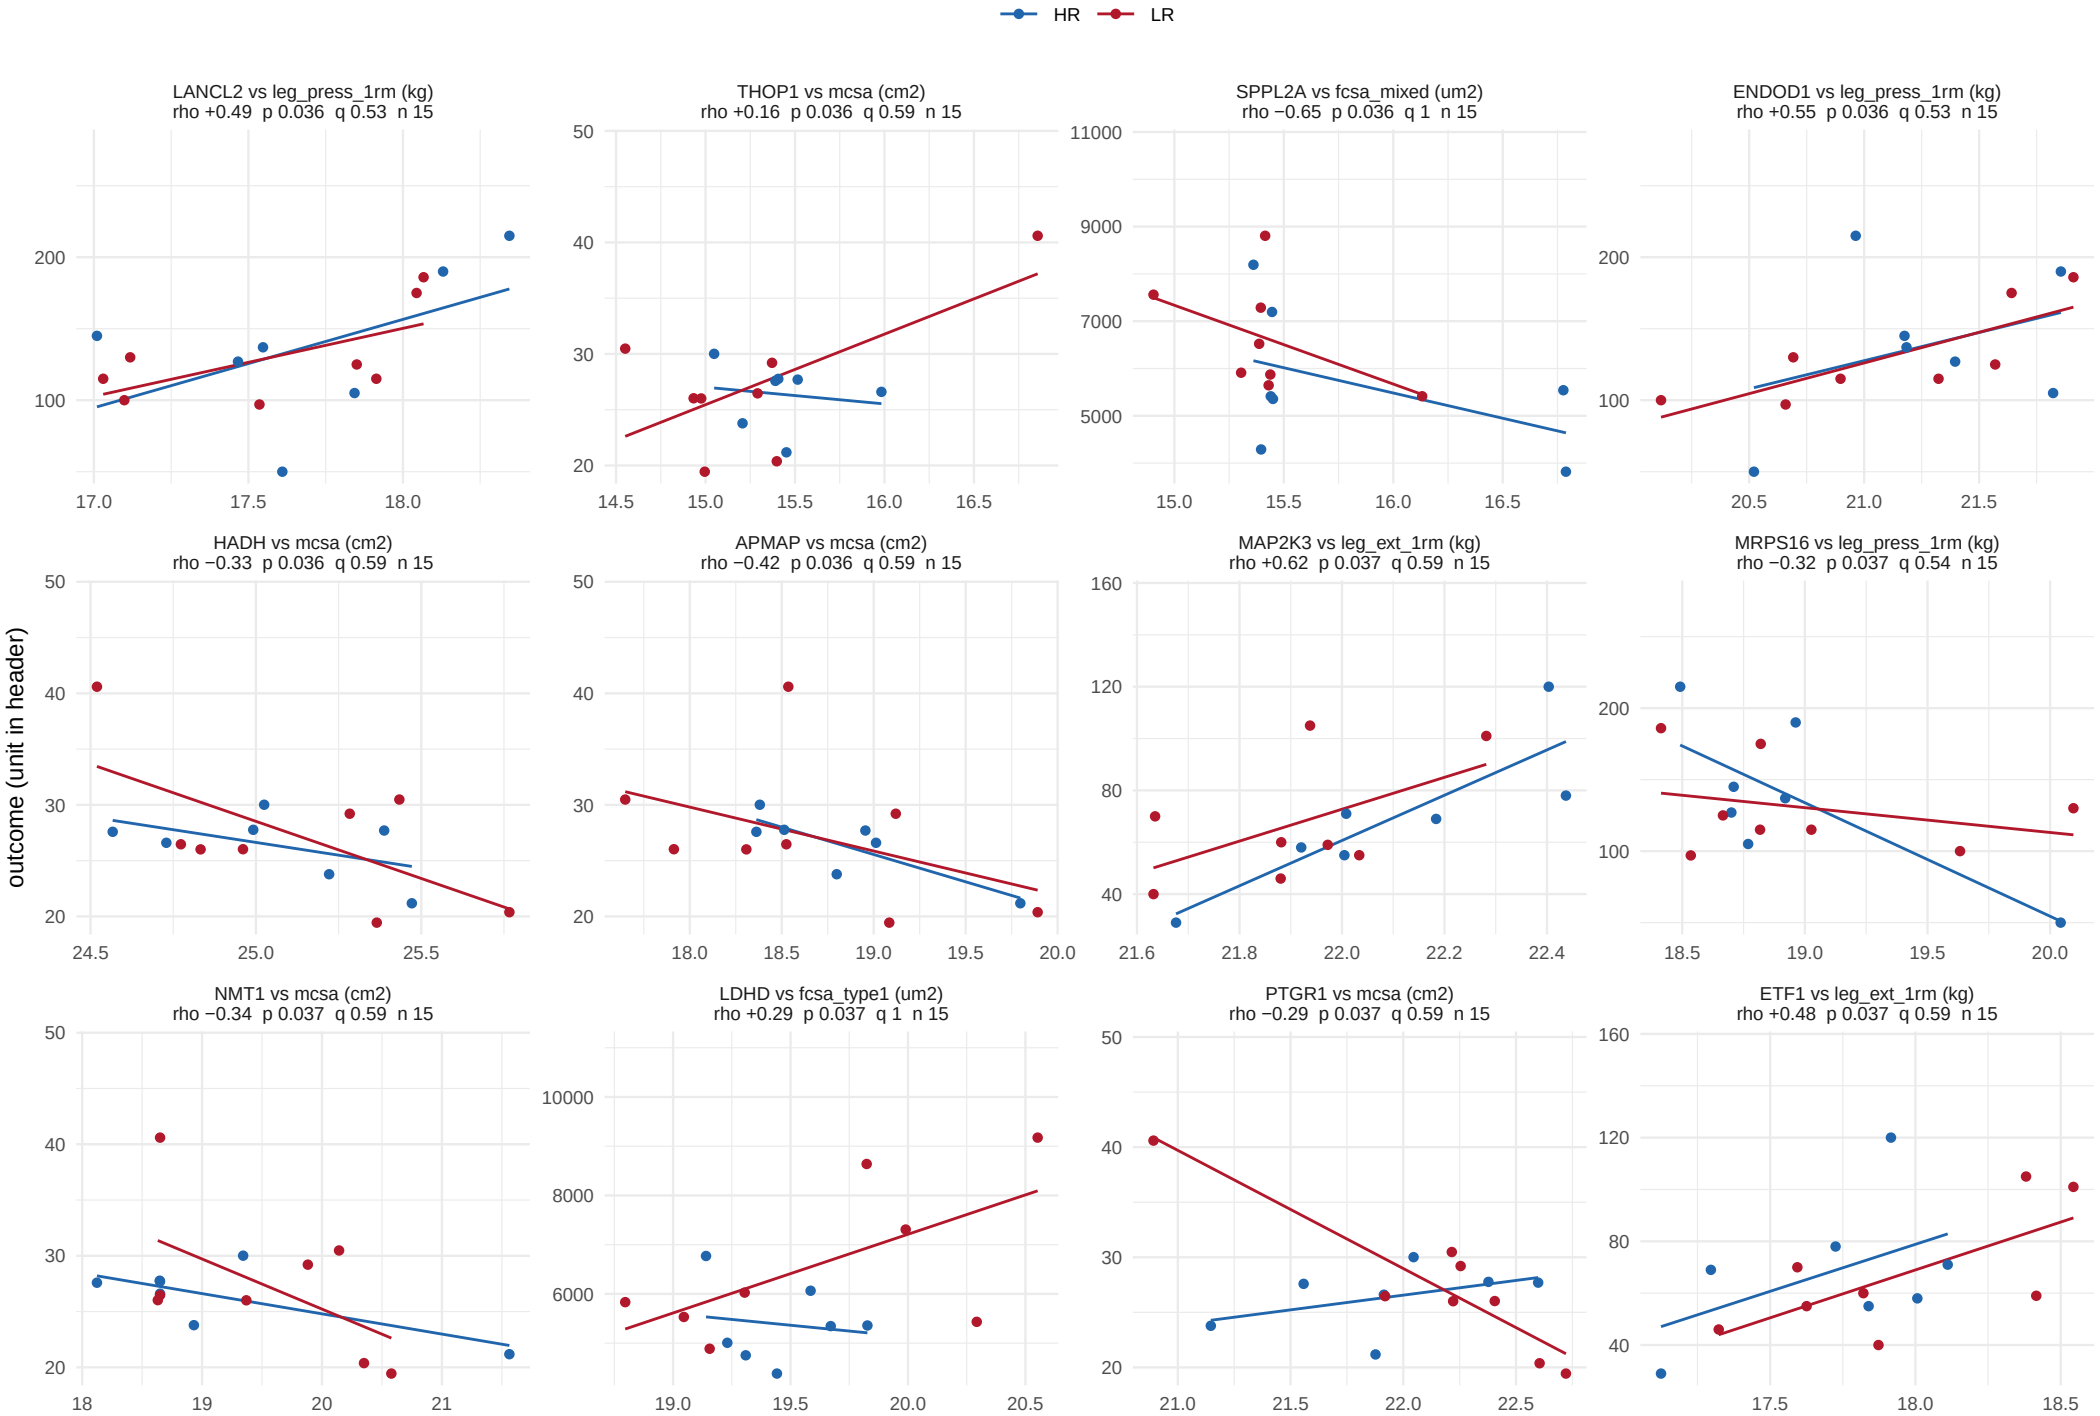

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


693 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 45 of 58.

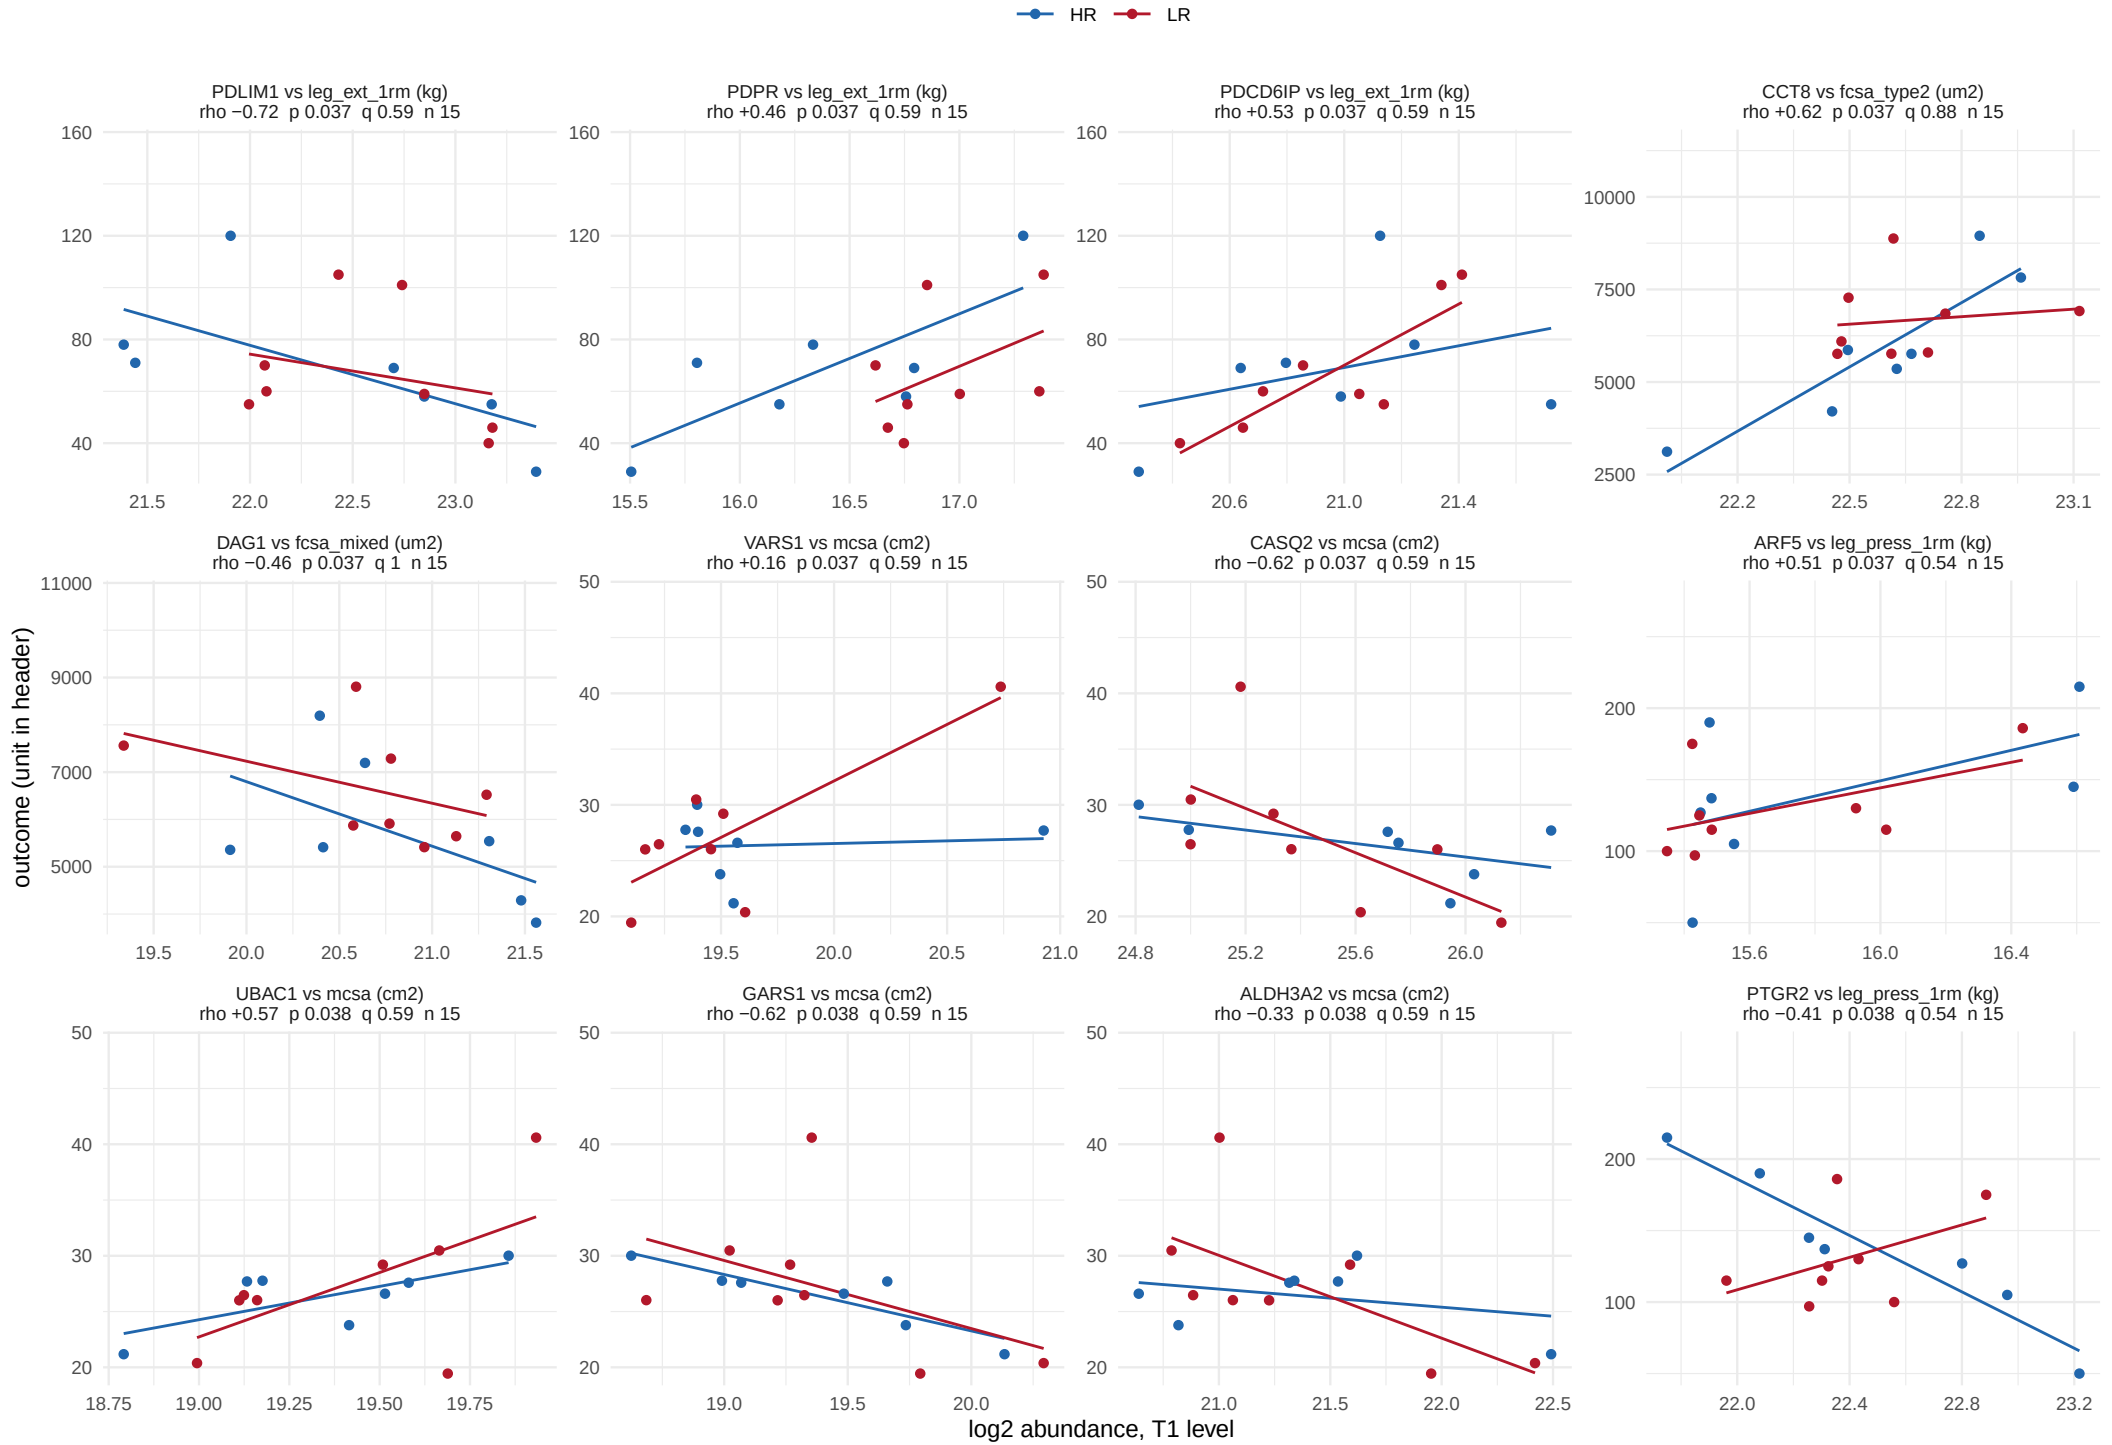

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


693 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 46 of 58.

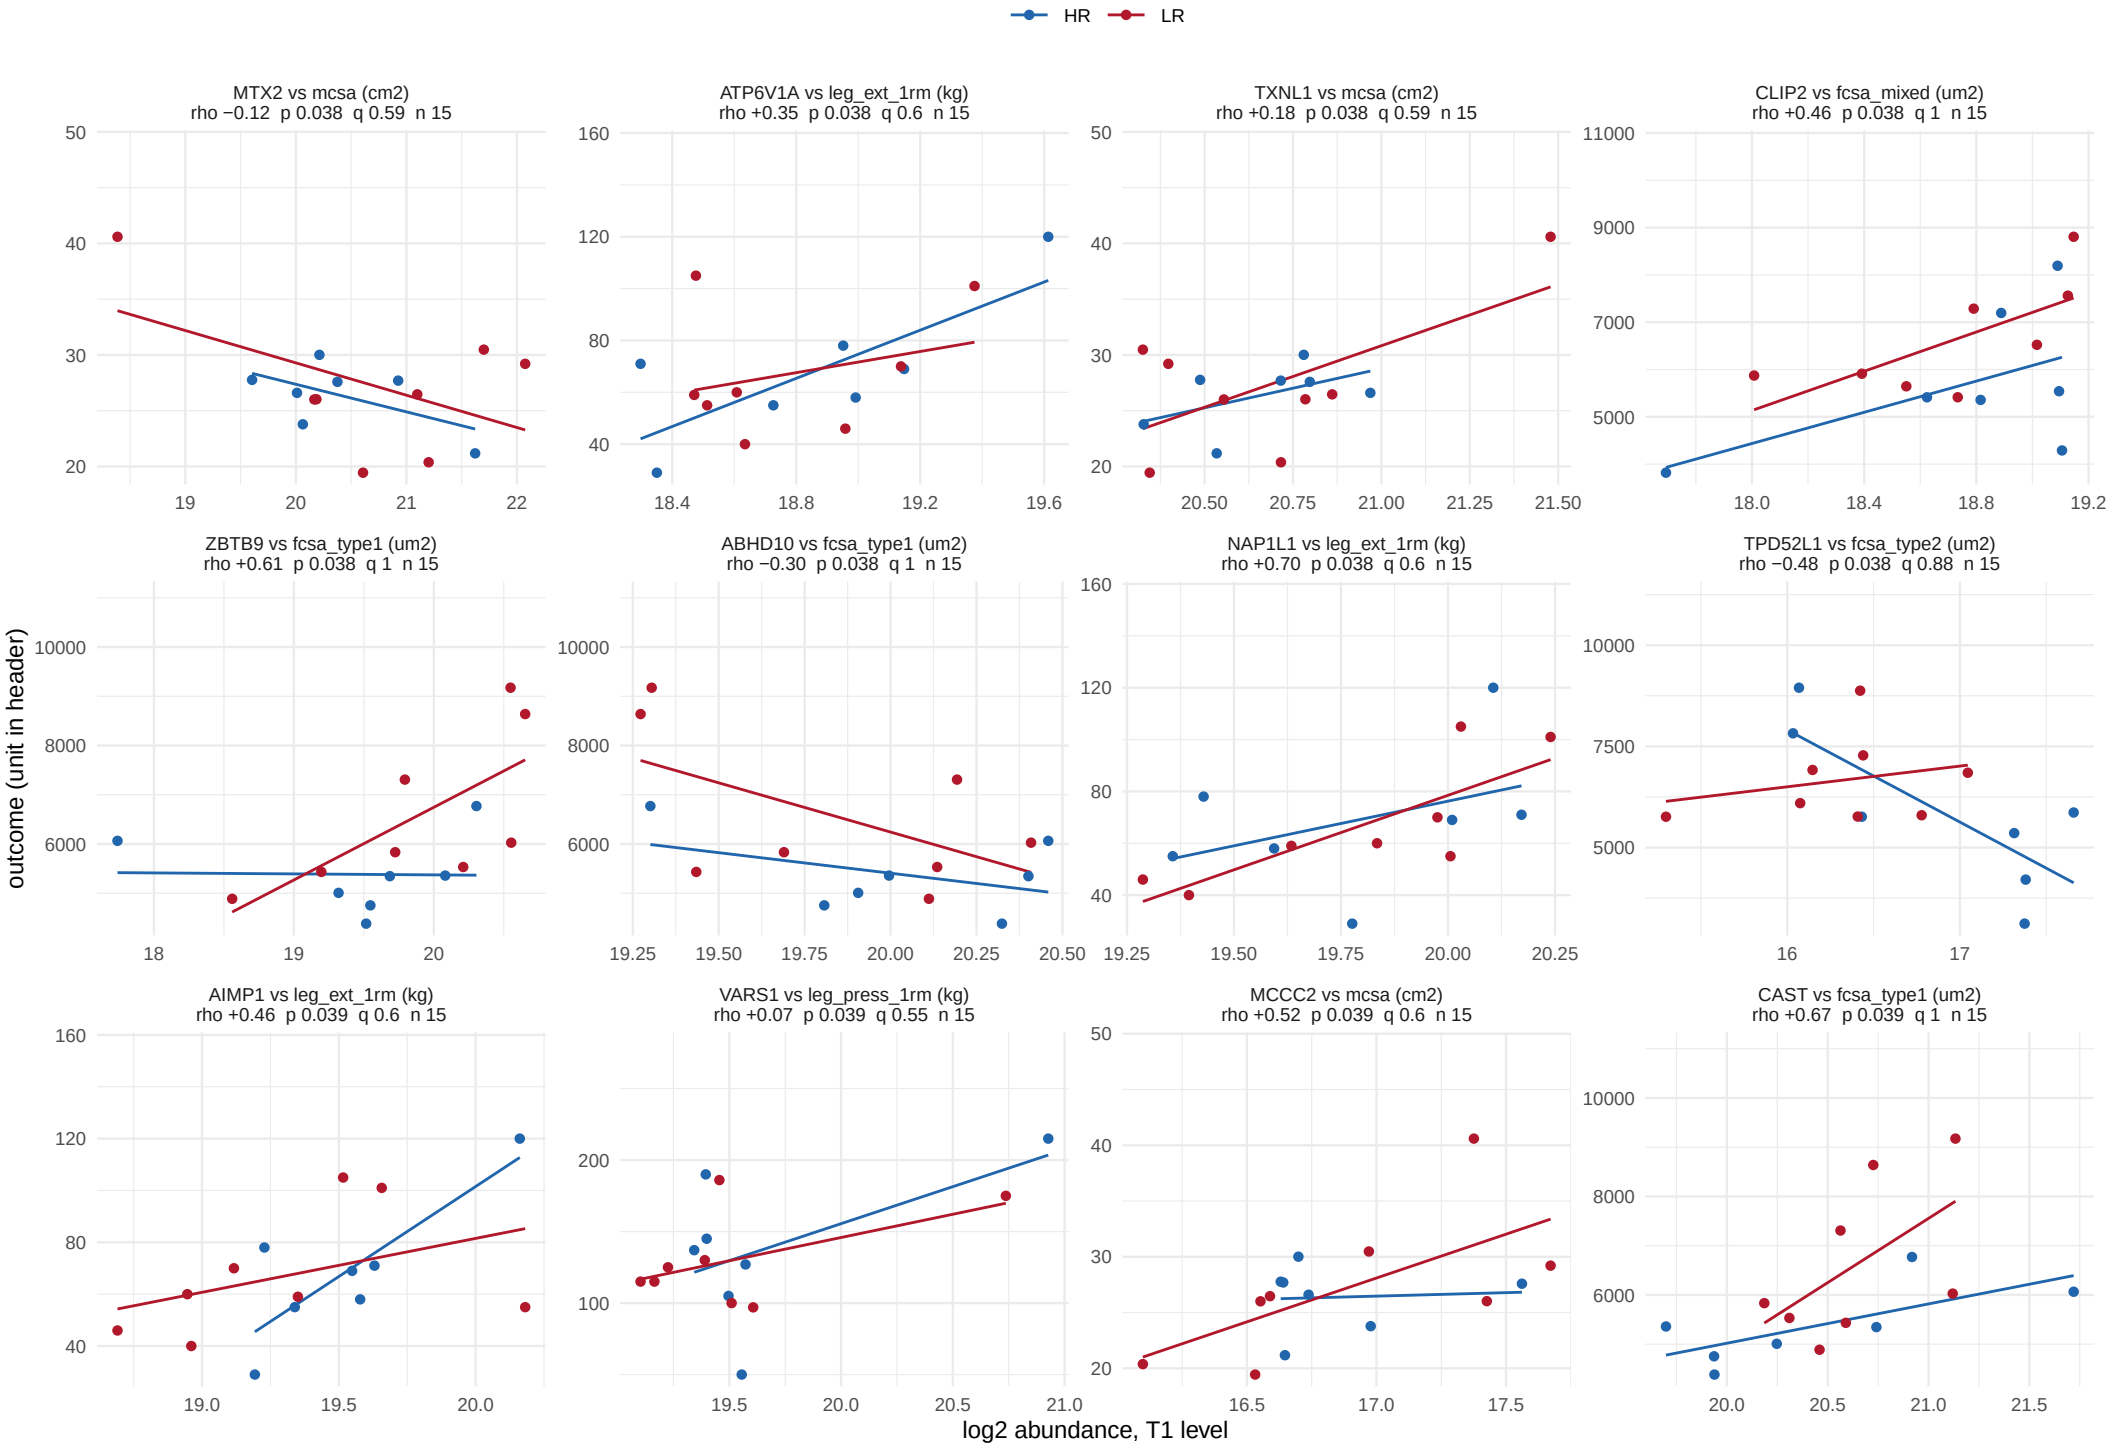

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


693 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 47 of 58.

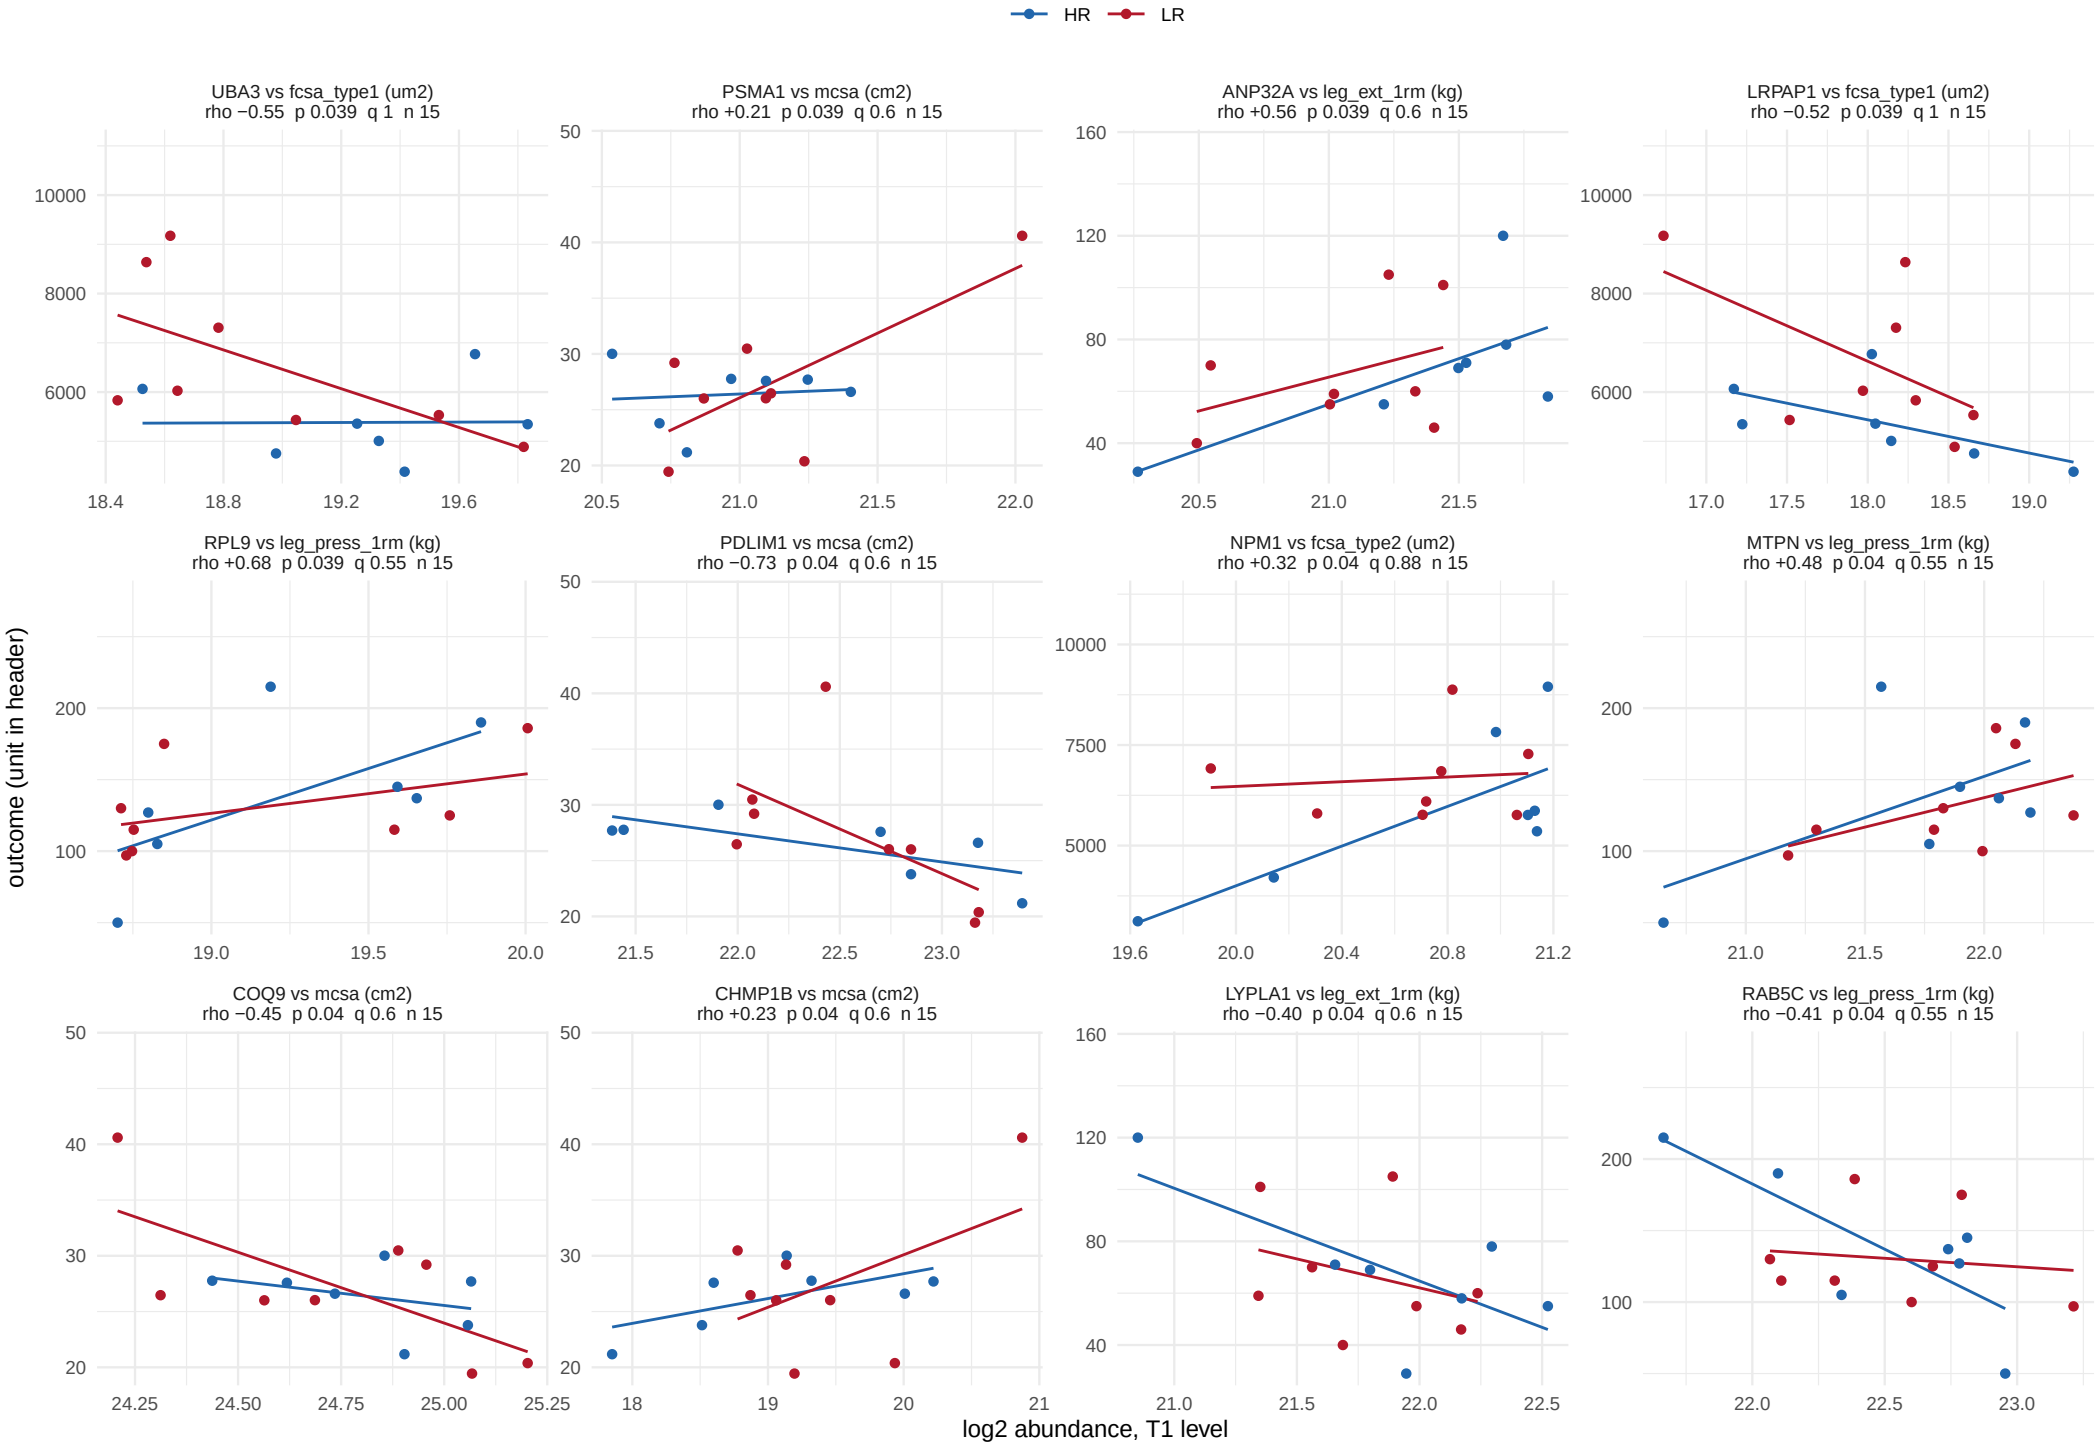

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window

693 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 48 of 58.

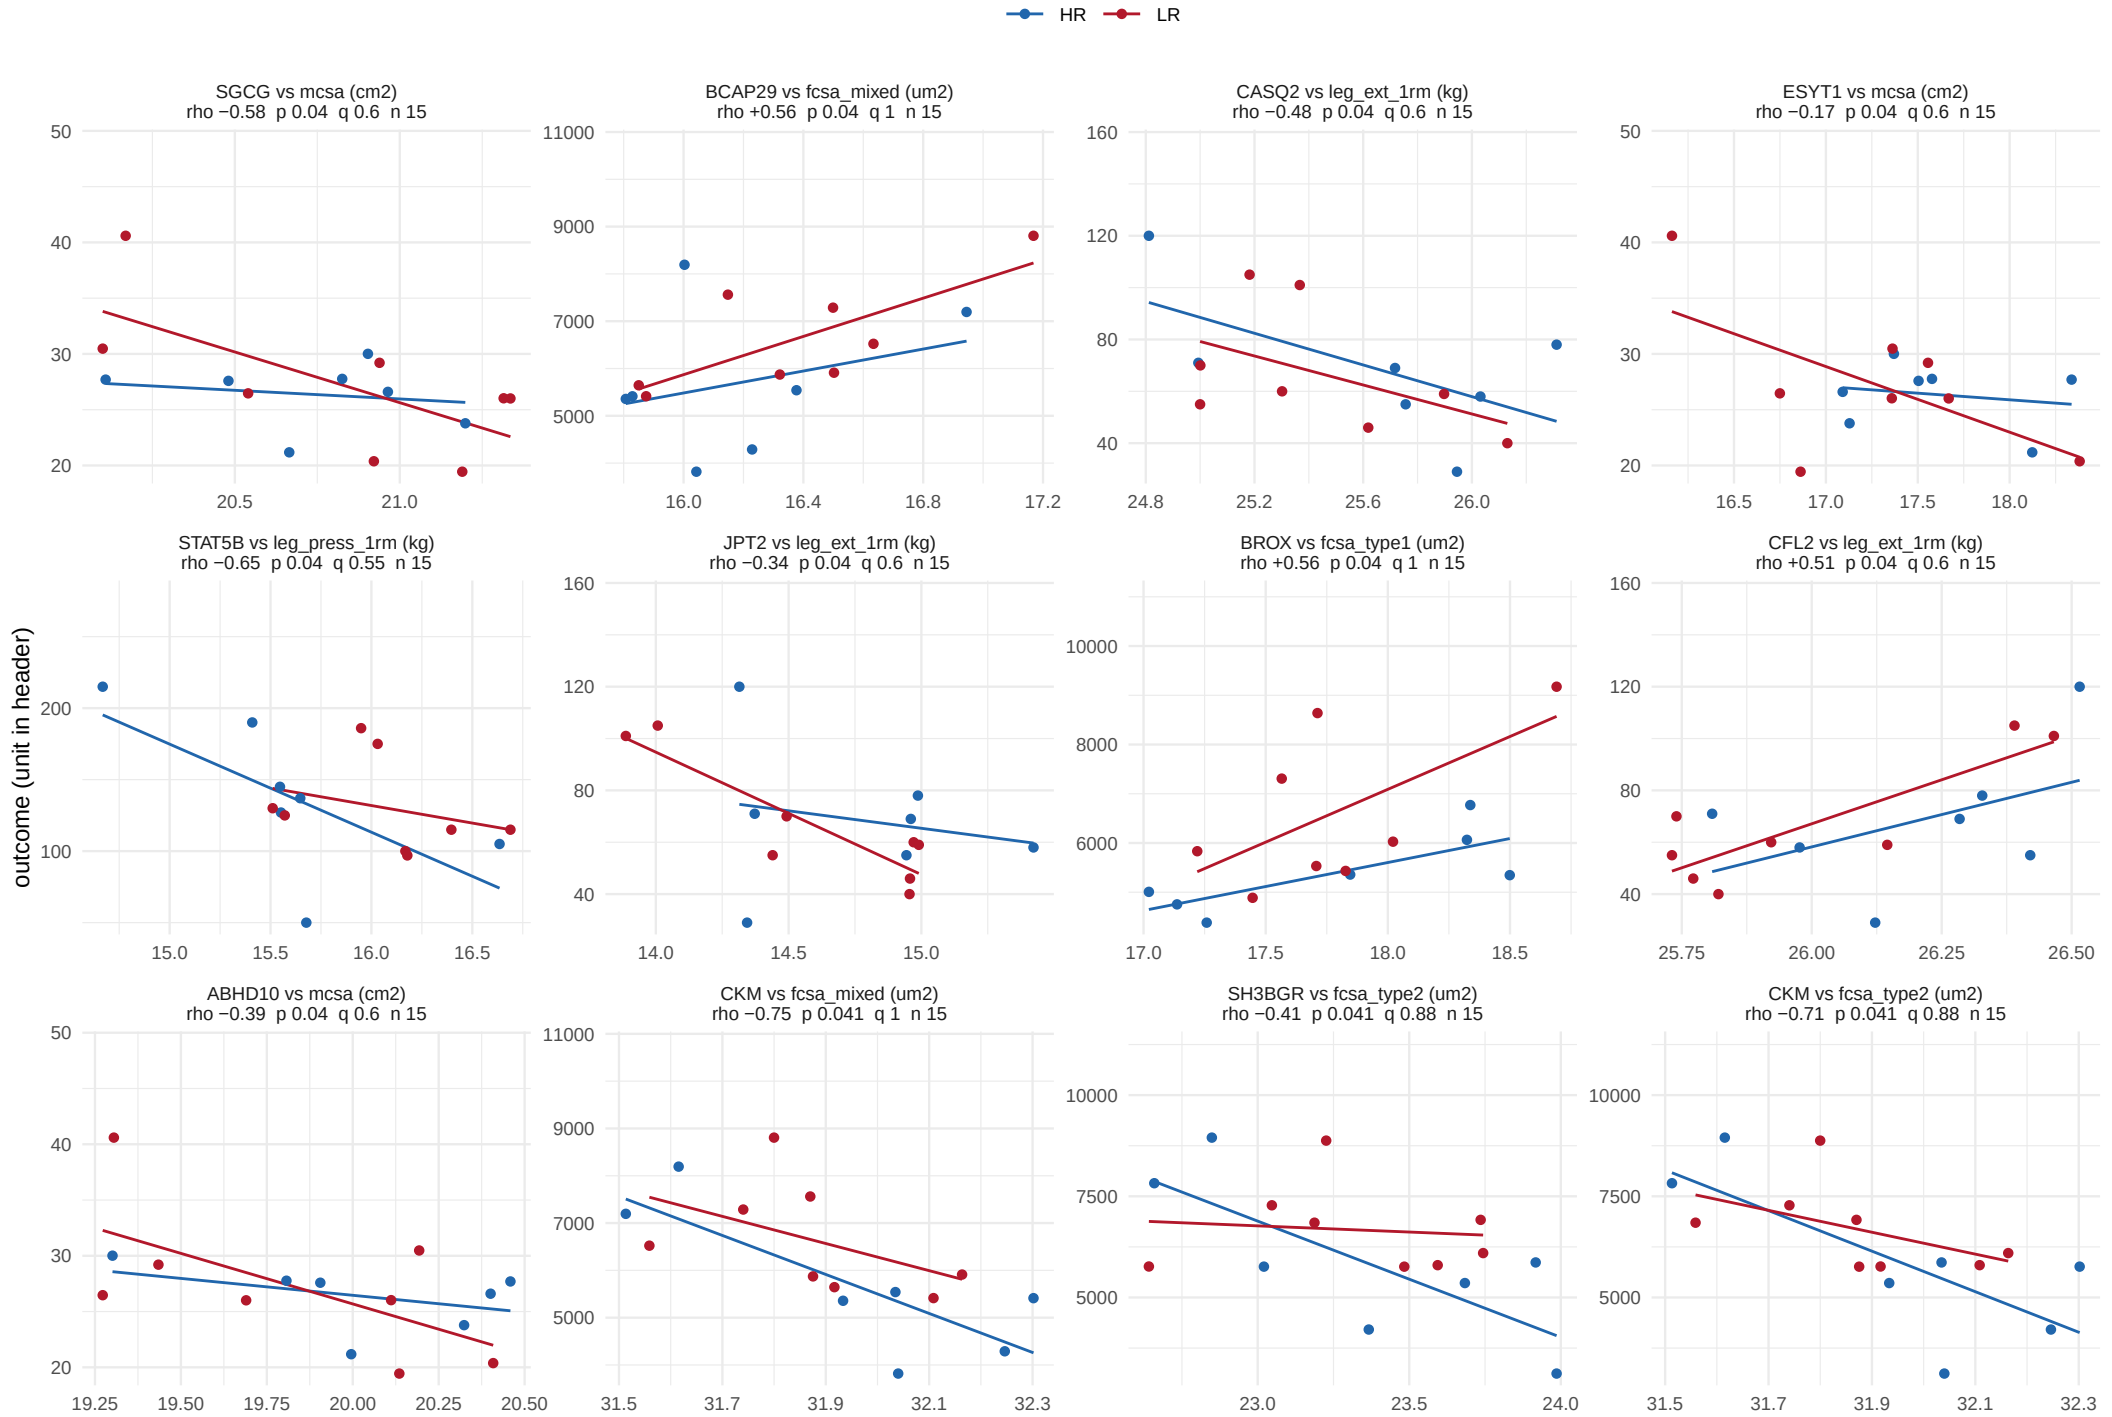

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


693 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 49 of 58.



One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


693 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 50 of 58.

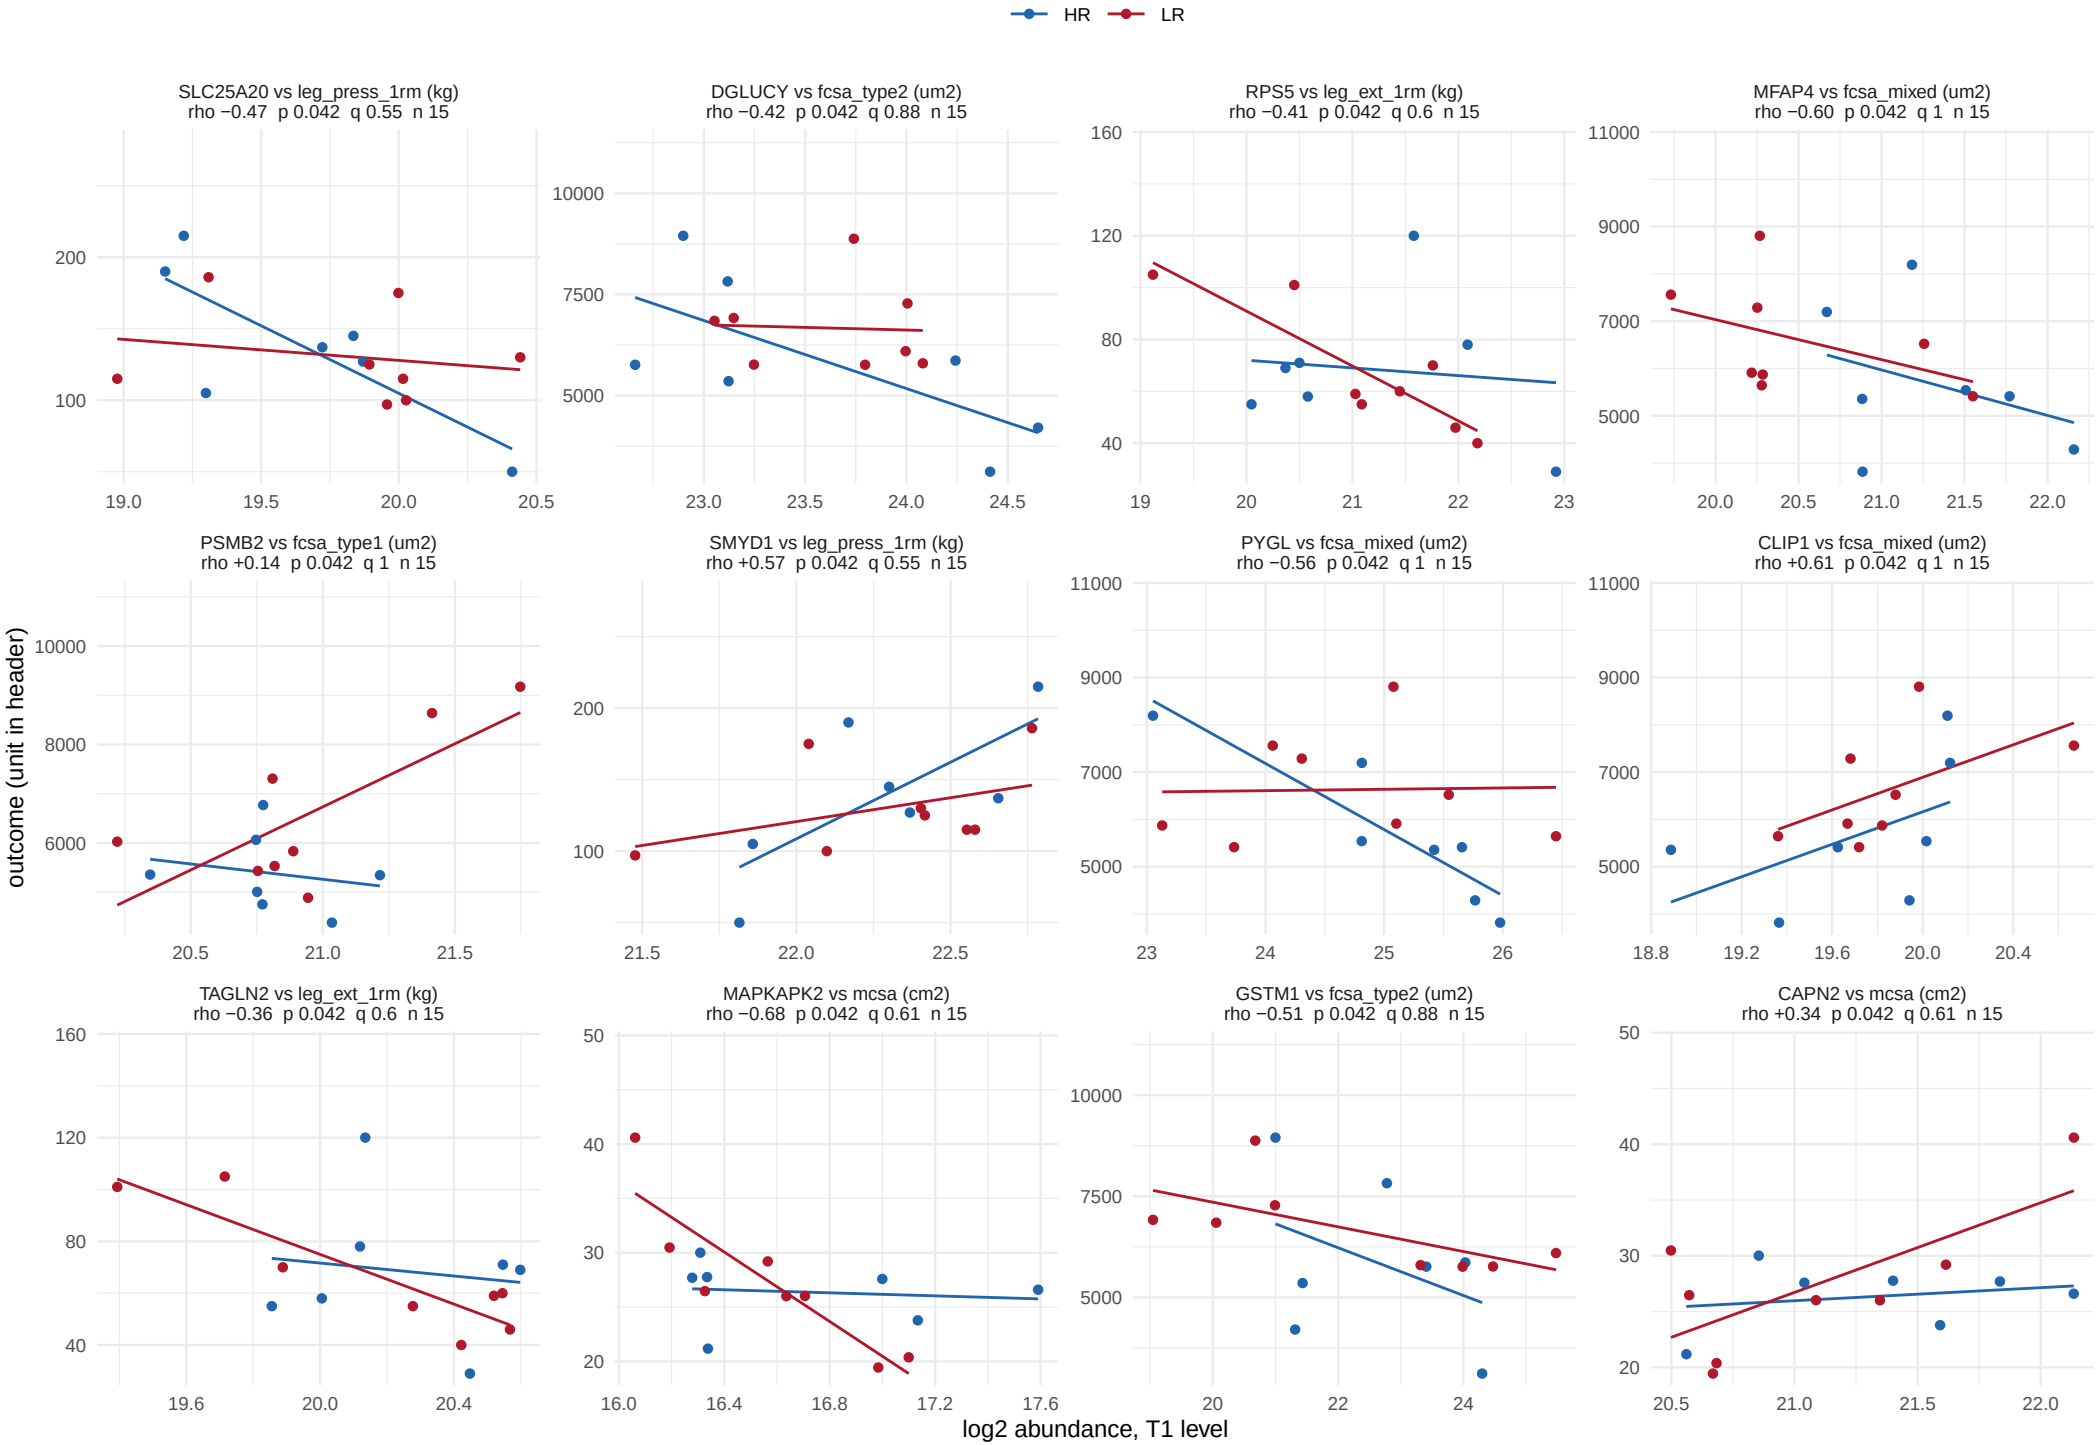

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


693 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 51 of 58.

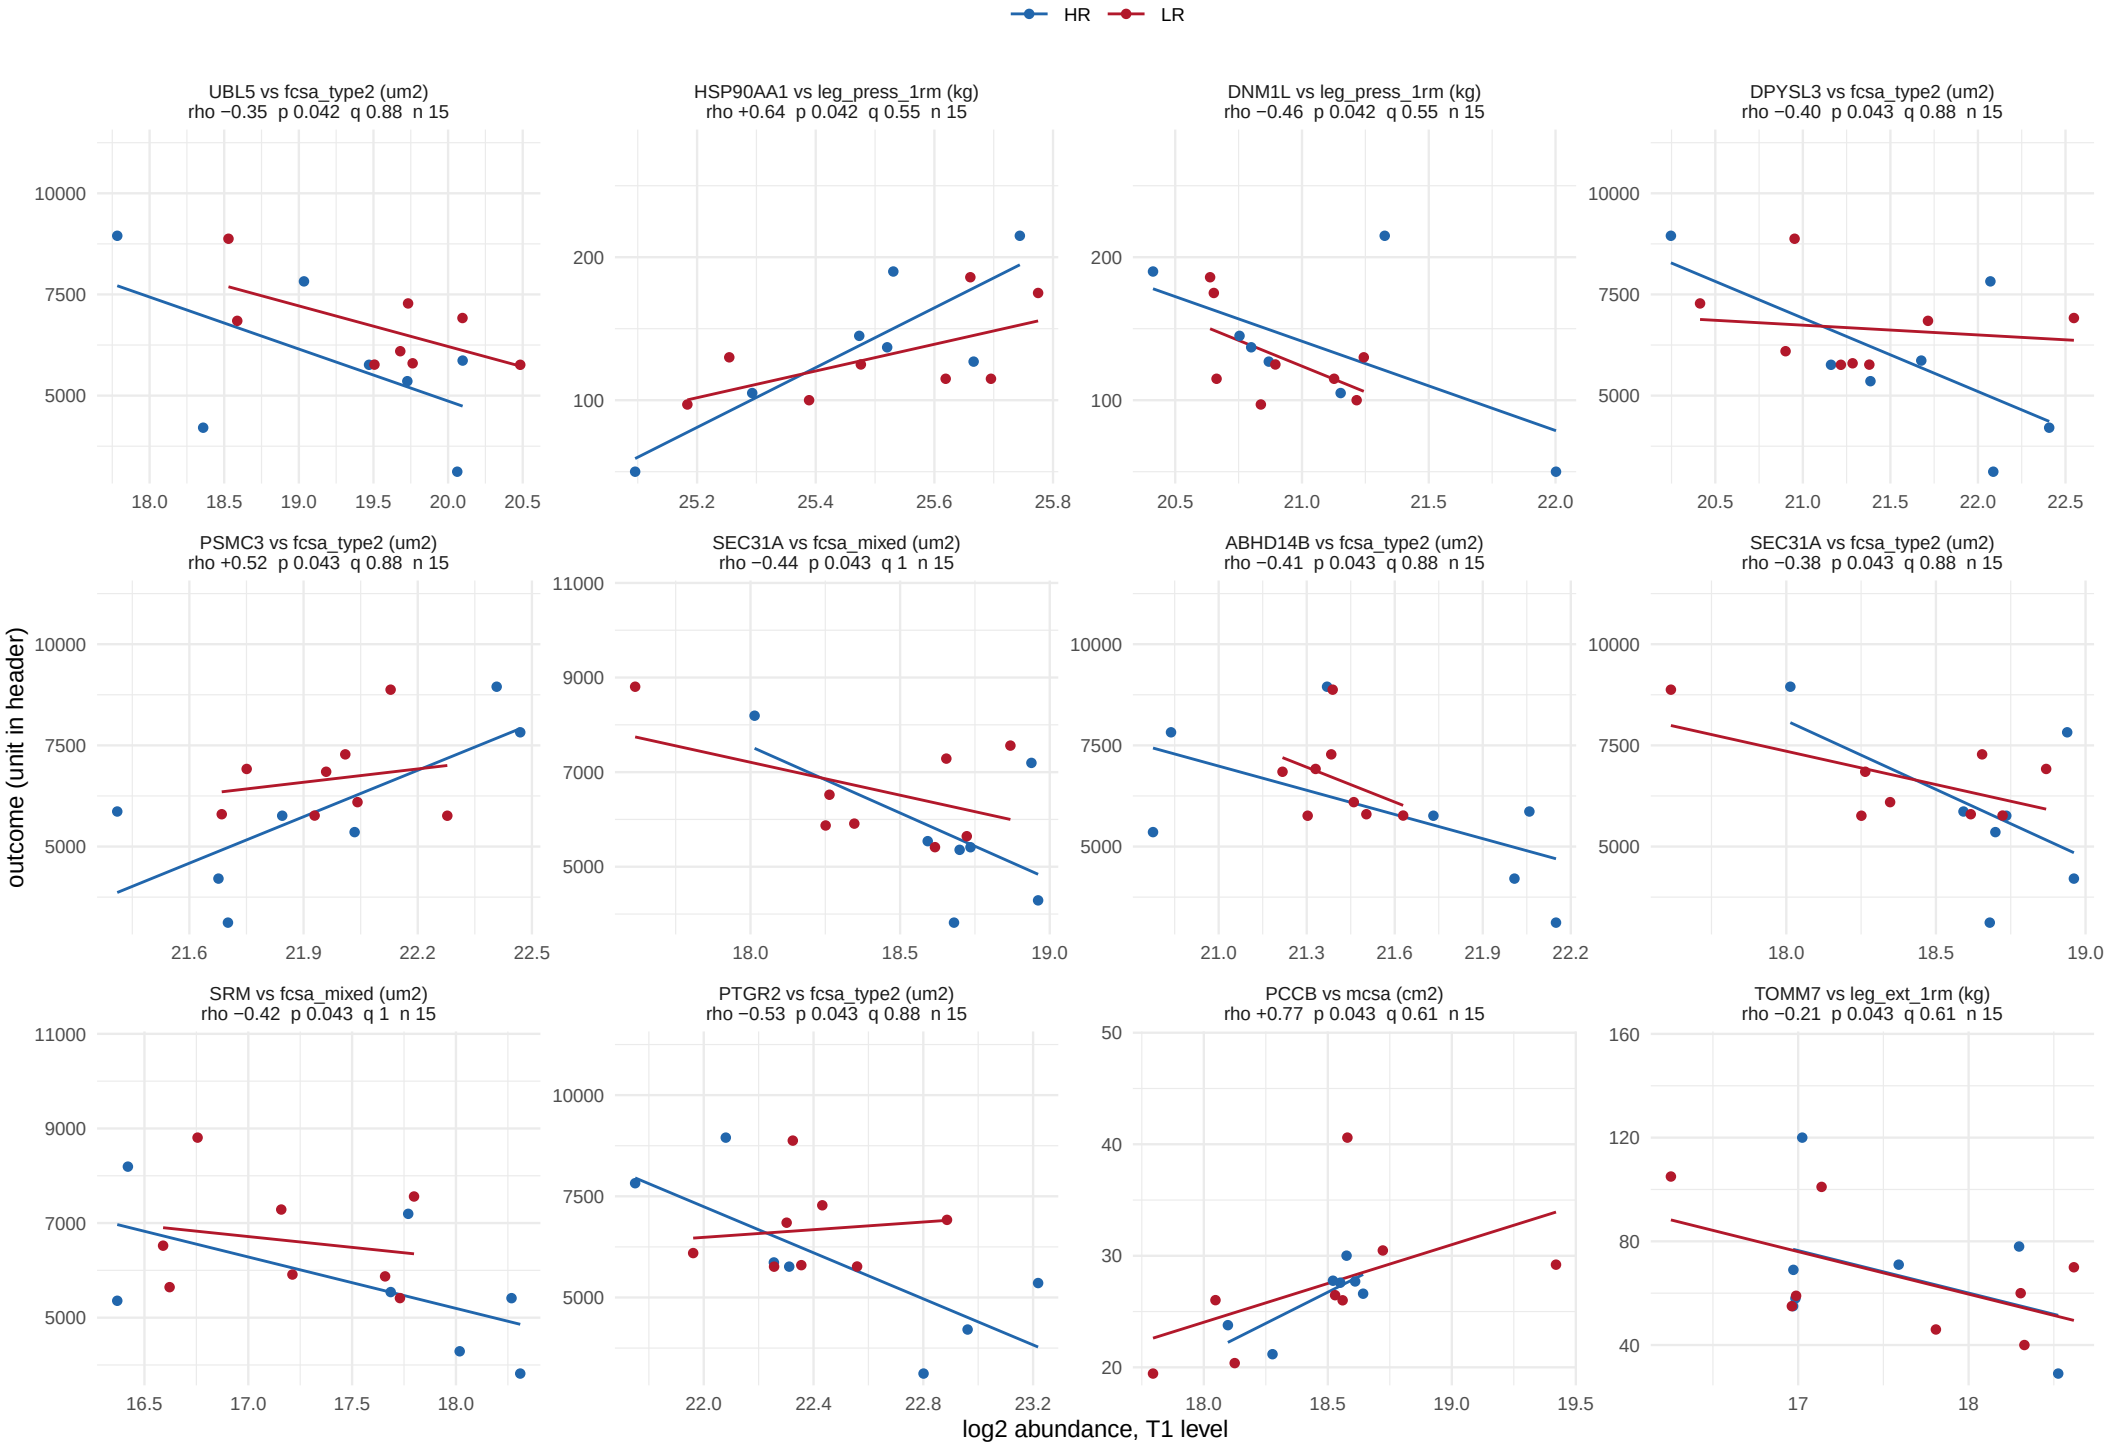

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


693 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 52 of 58.

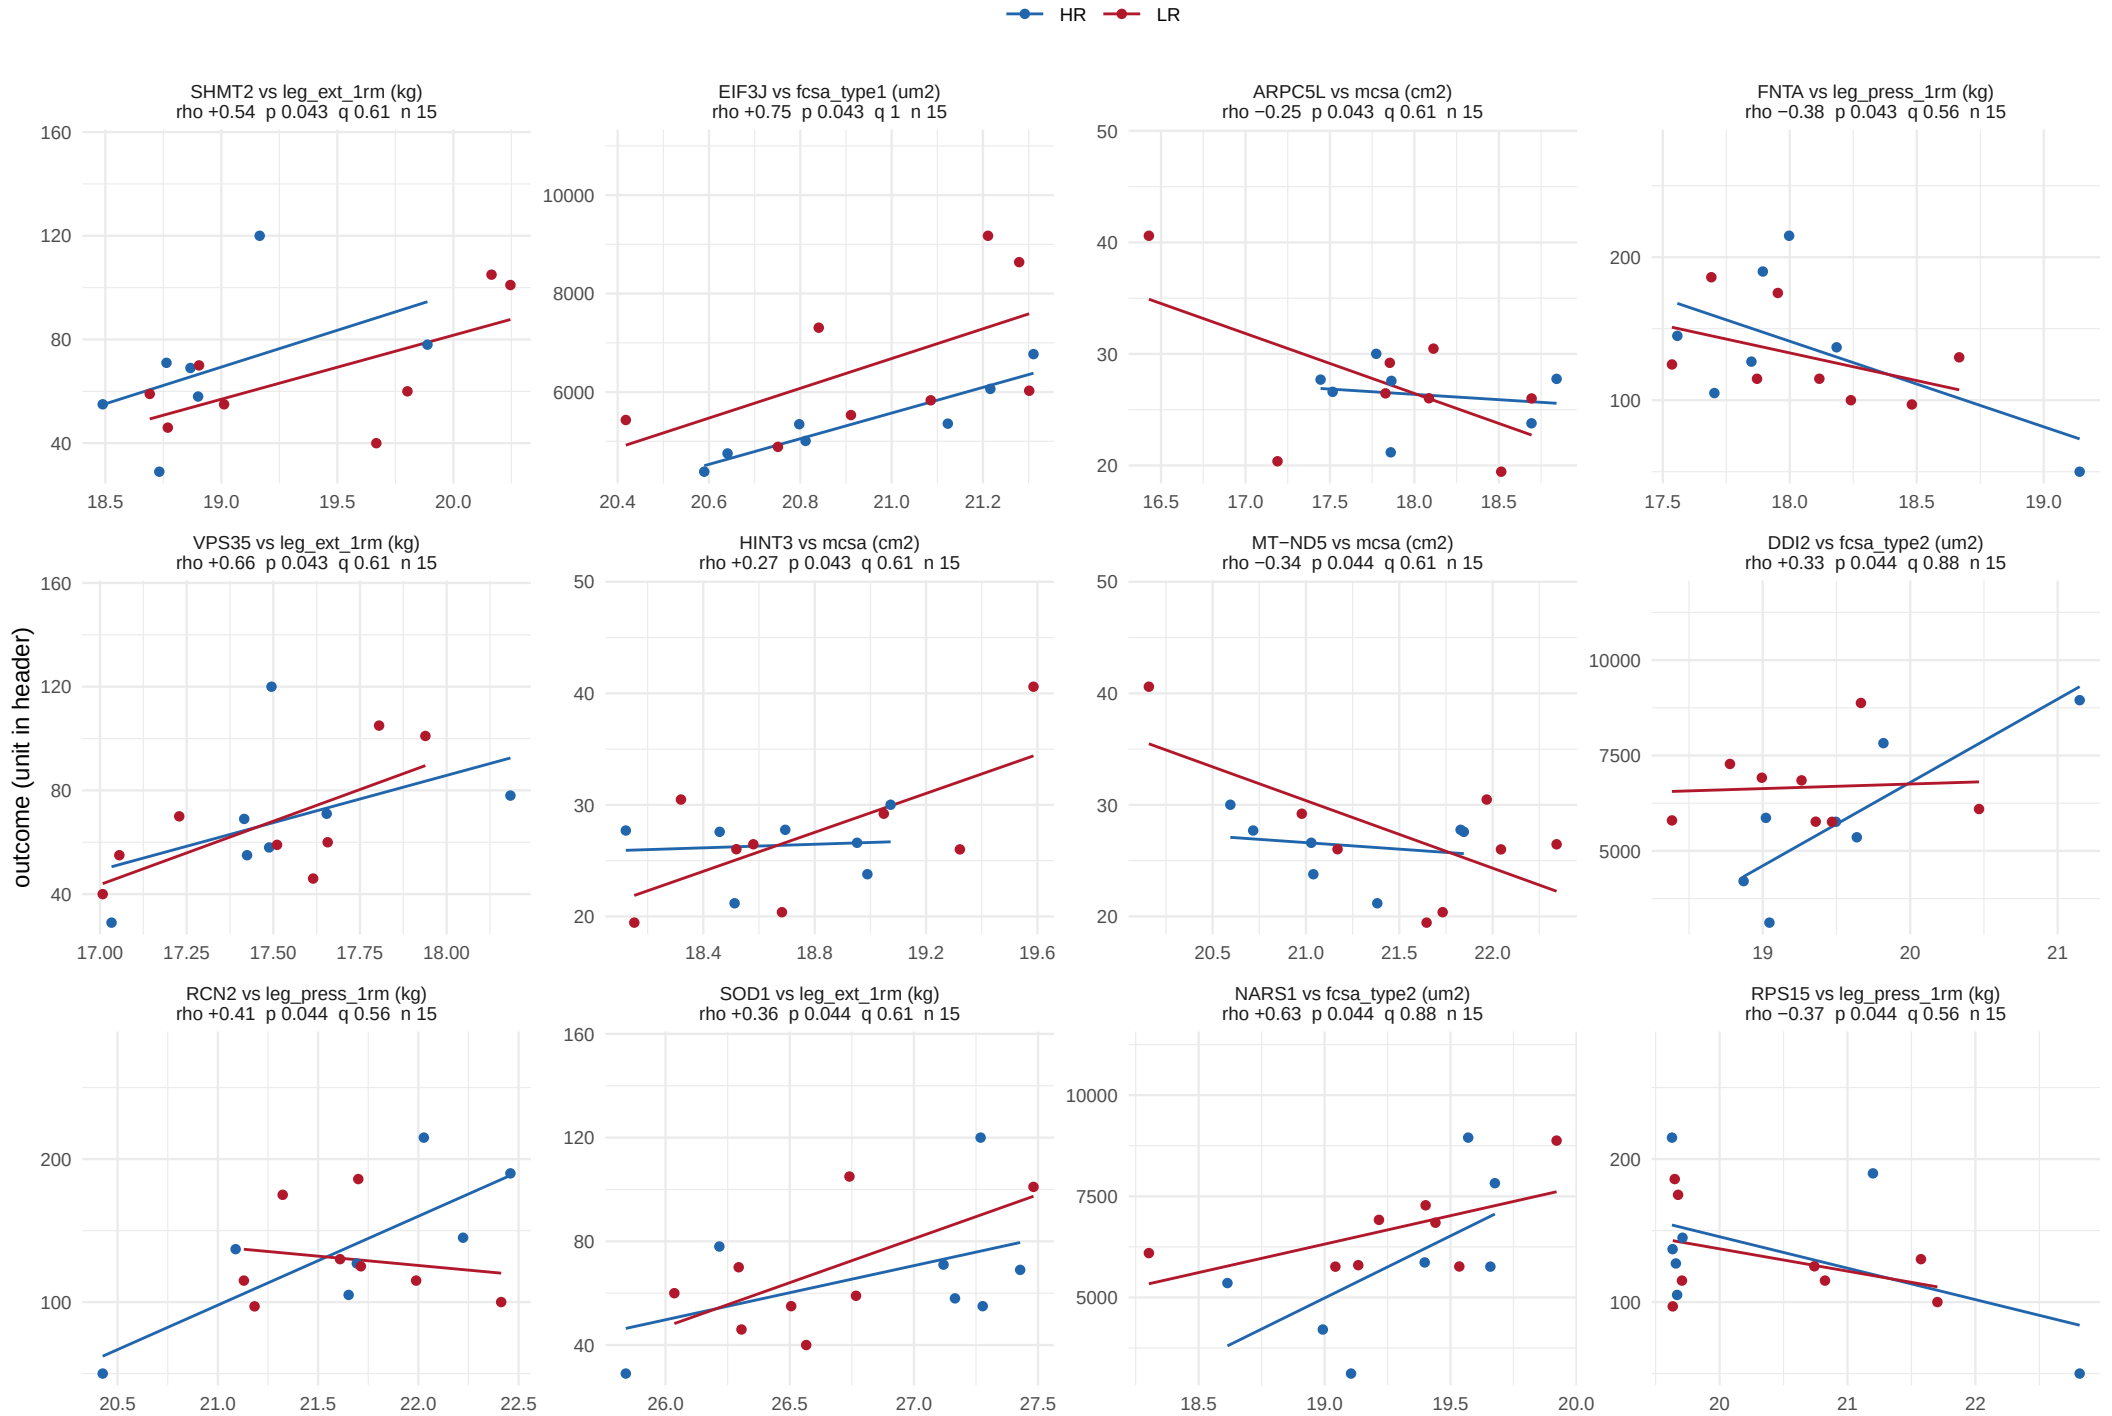

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window

693 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 53 of 58.

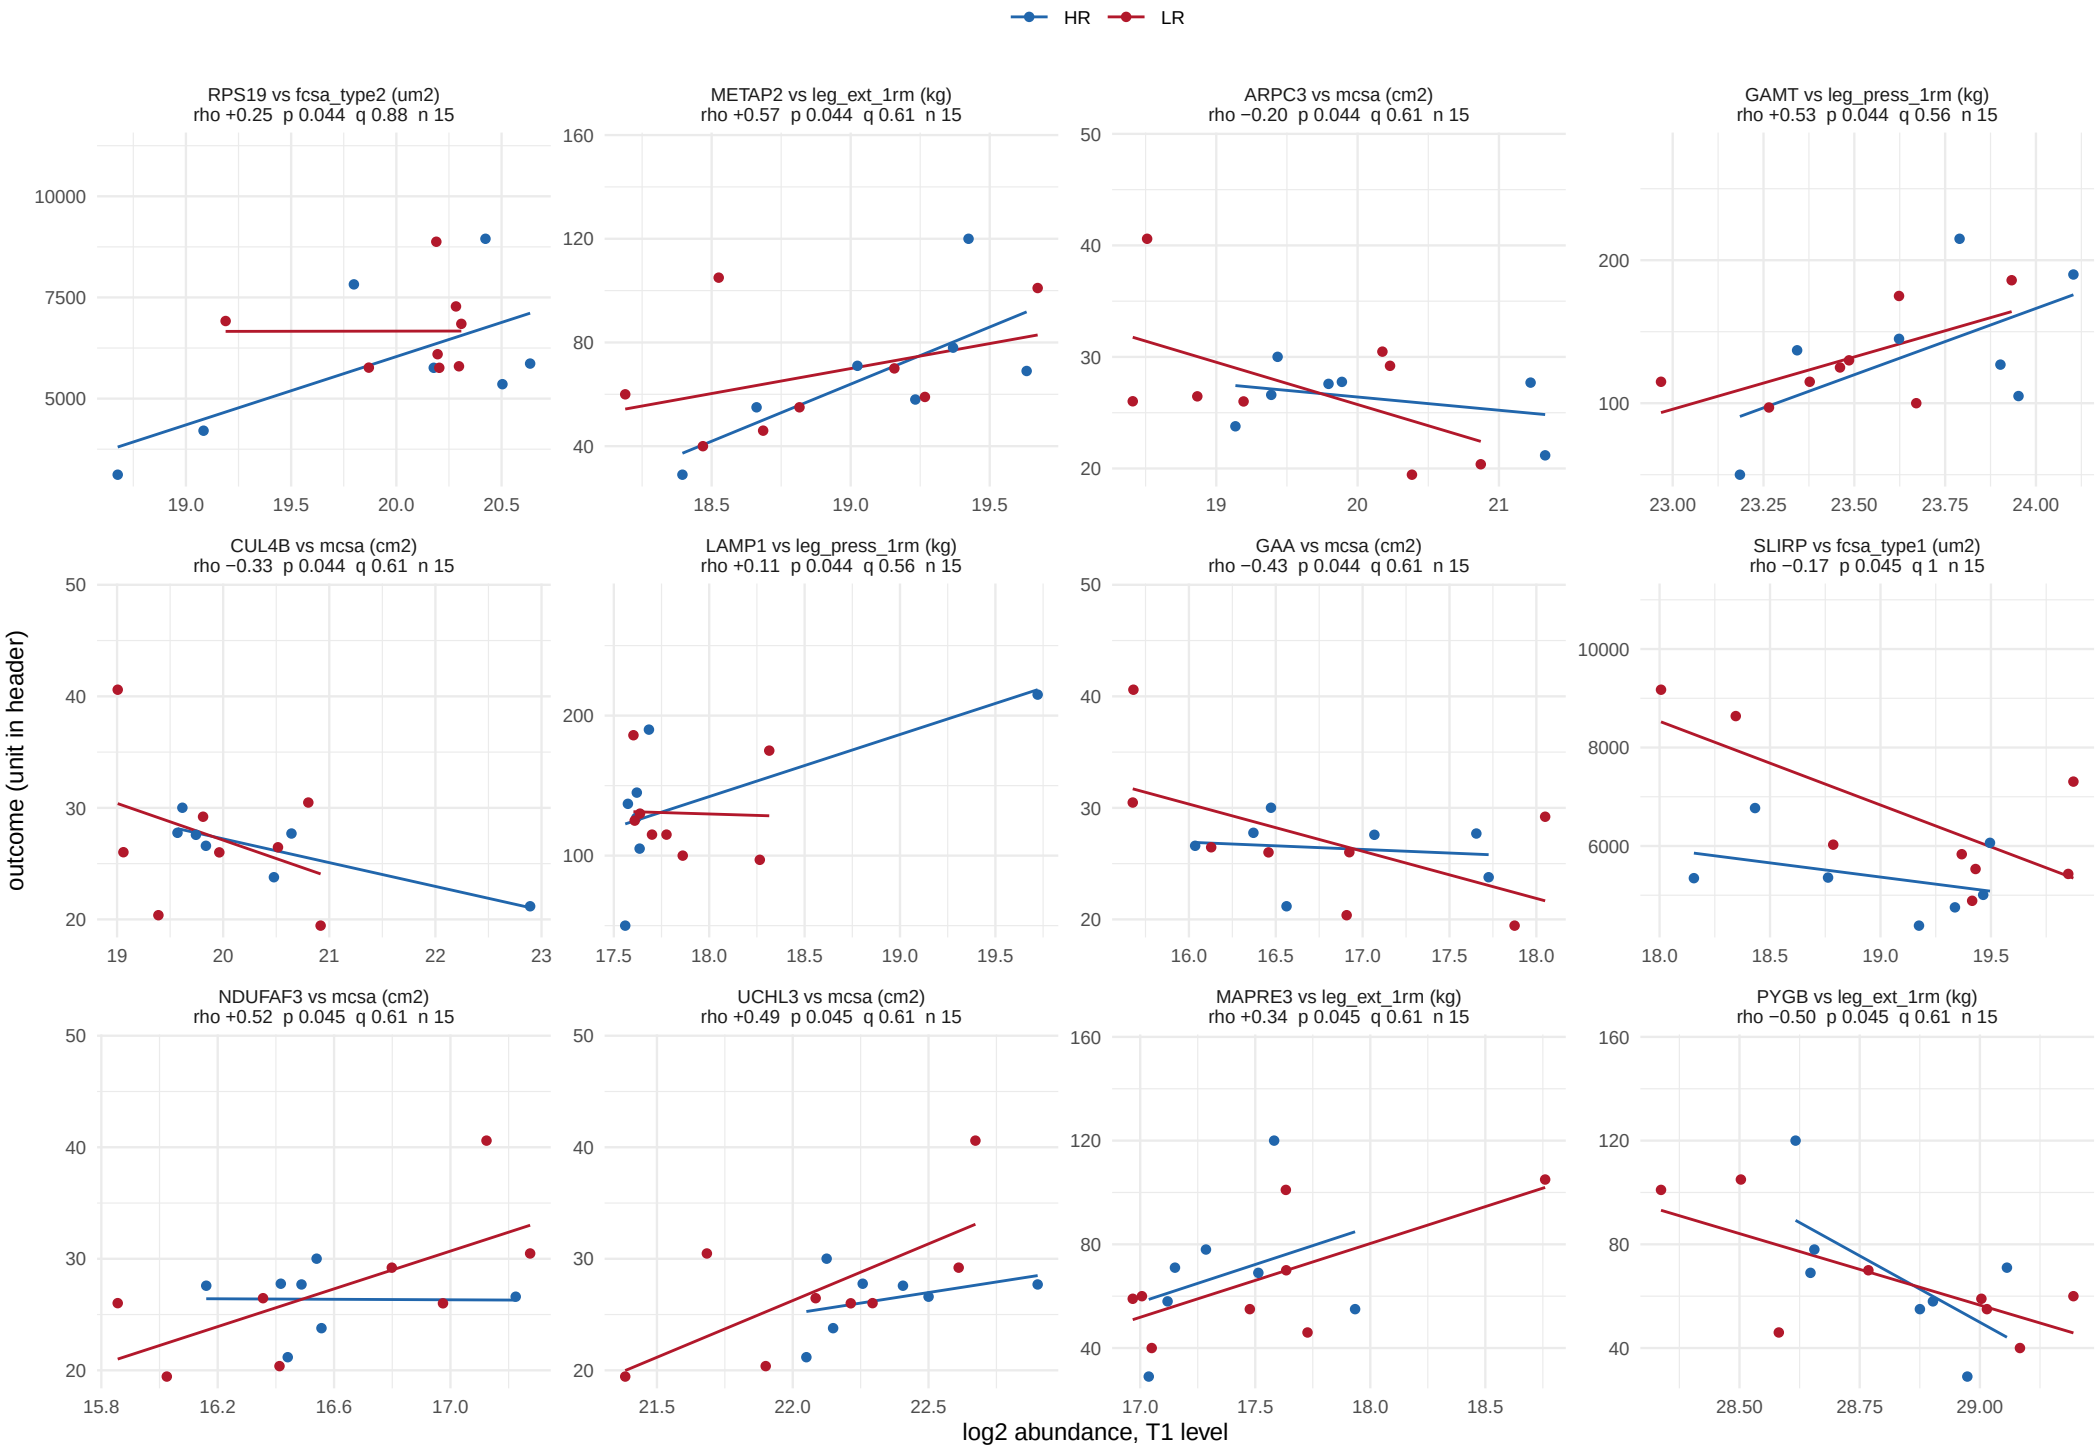

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


693 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 54 of 58.



One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


693 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 55 of 58.

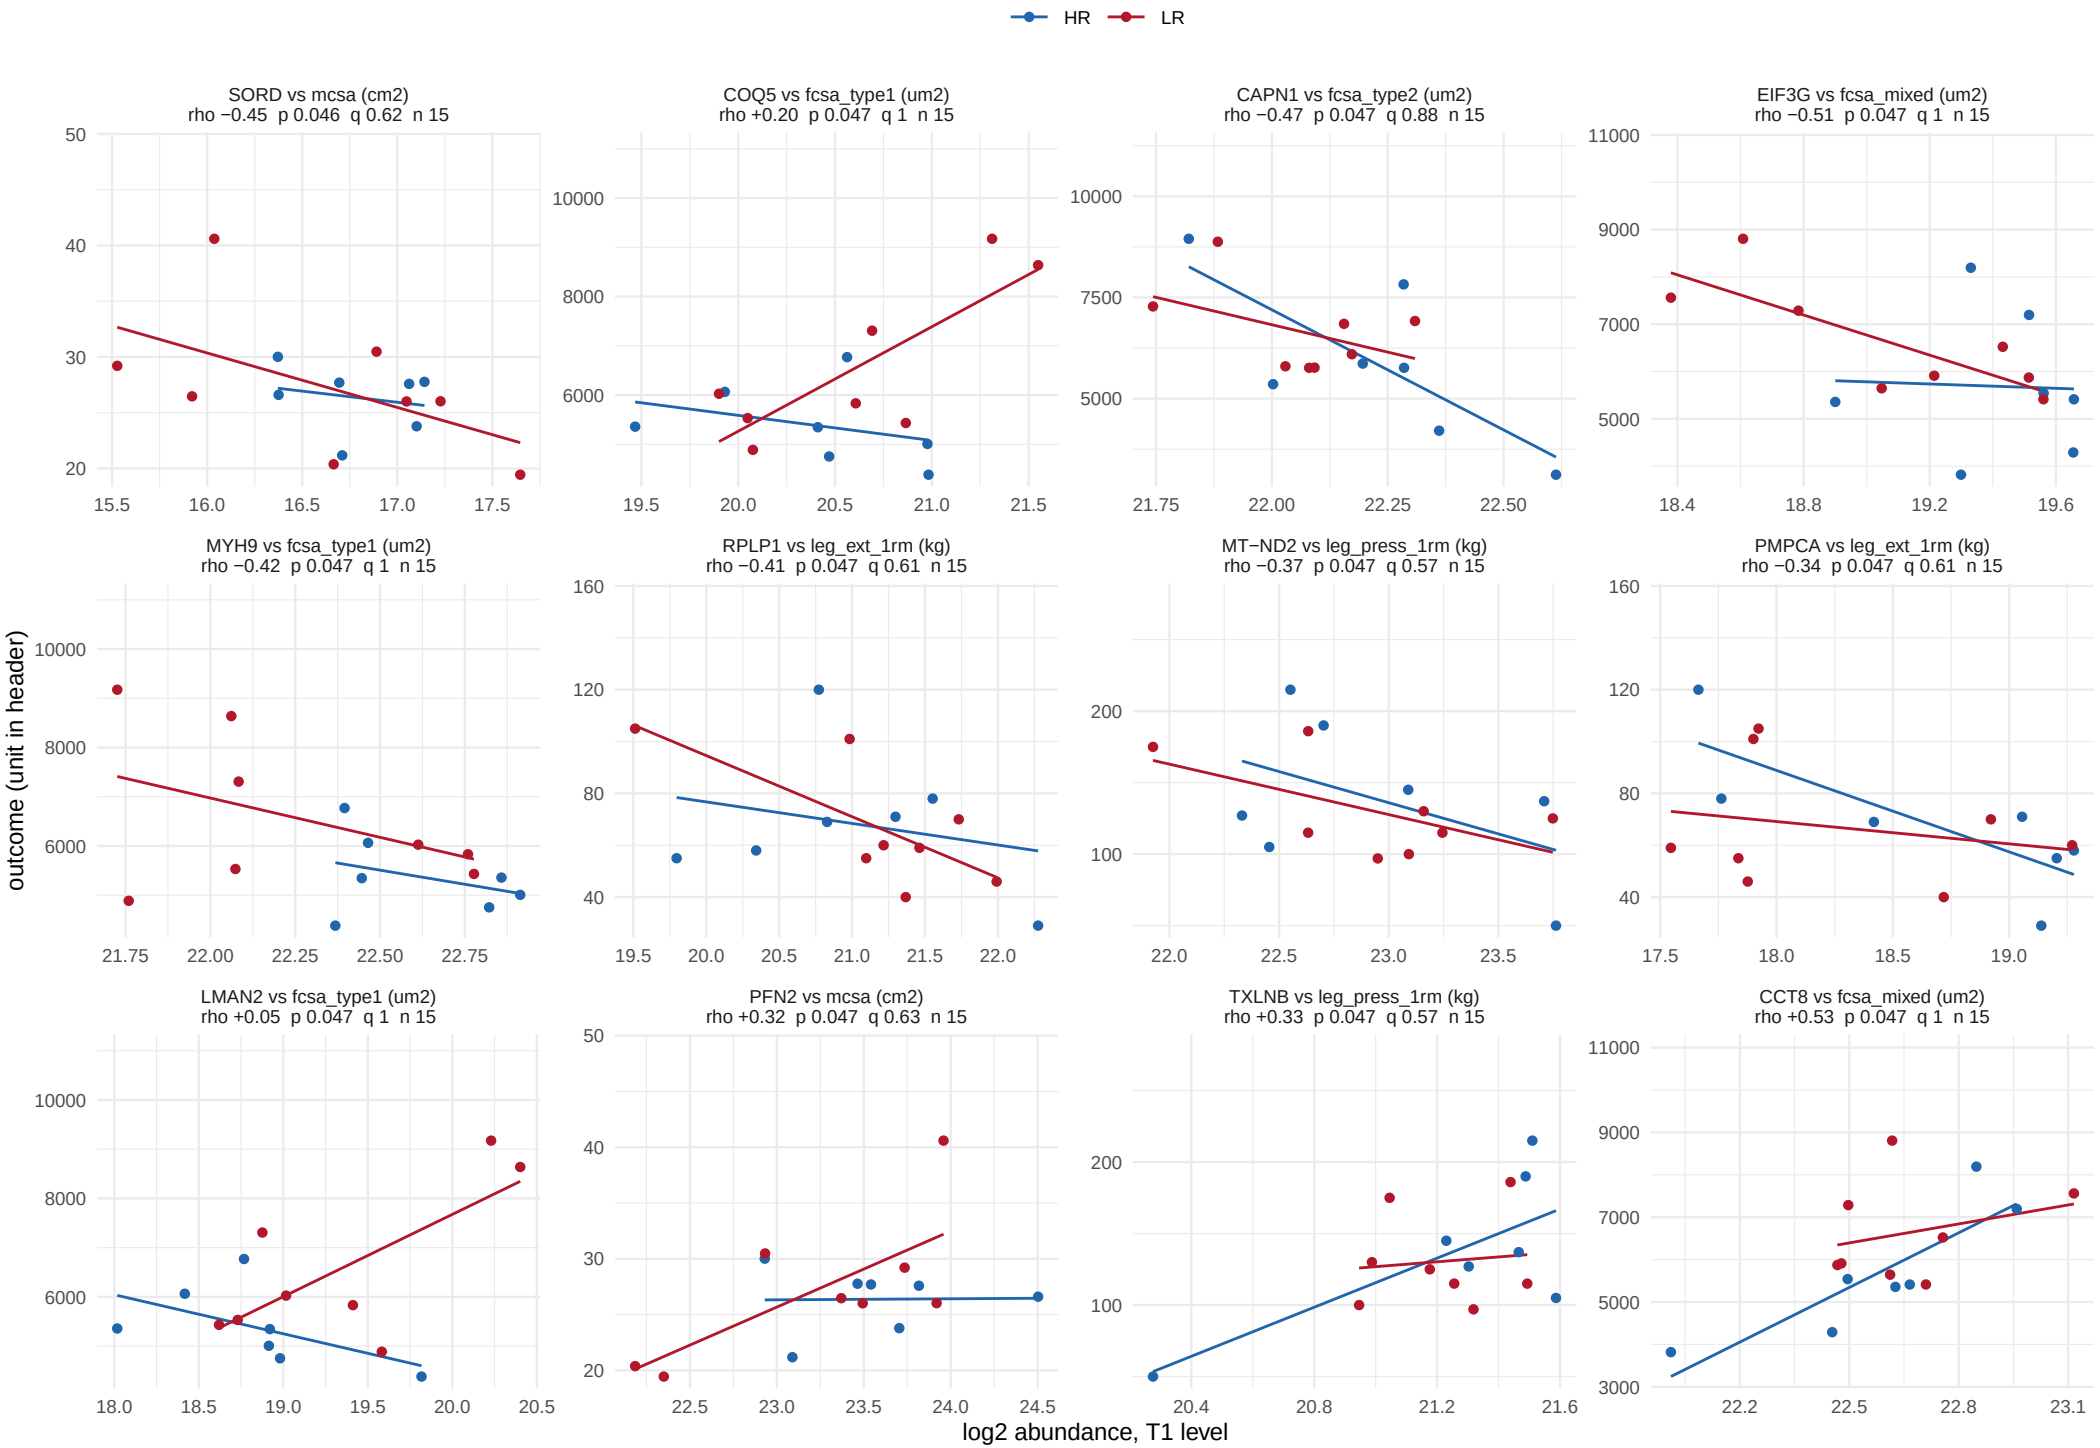

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


693 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 56 of 58.

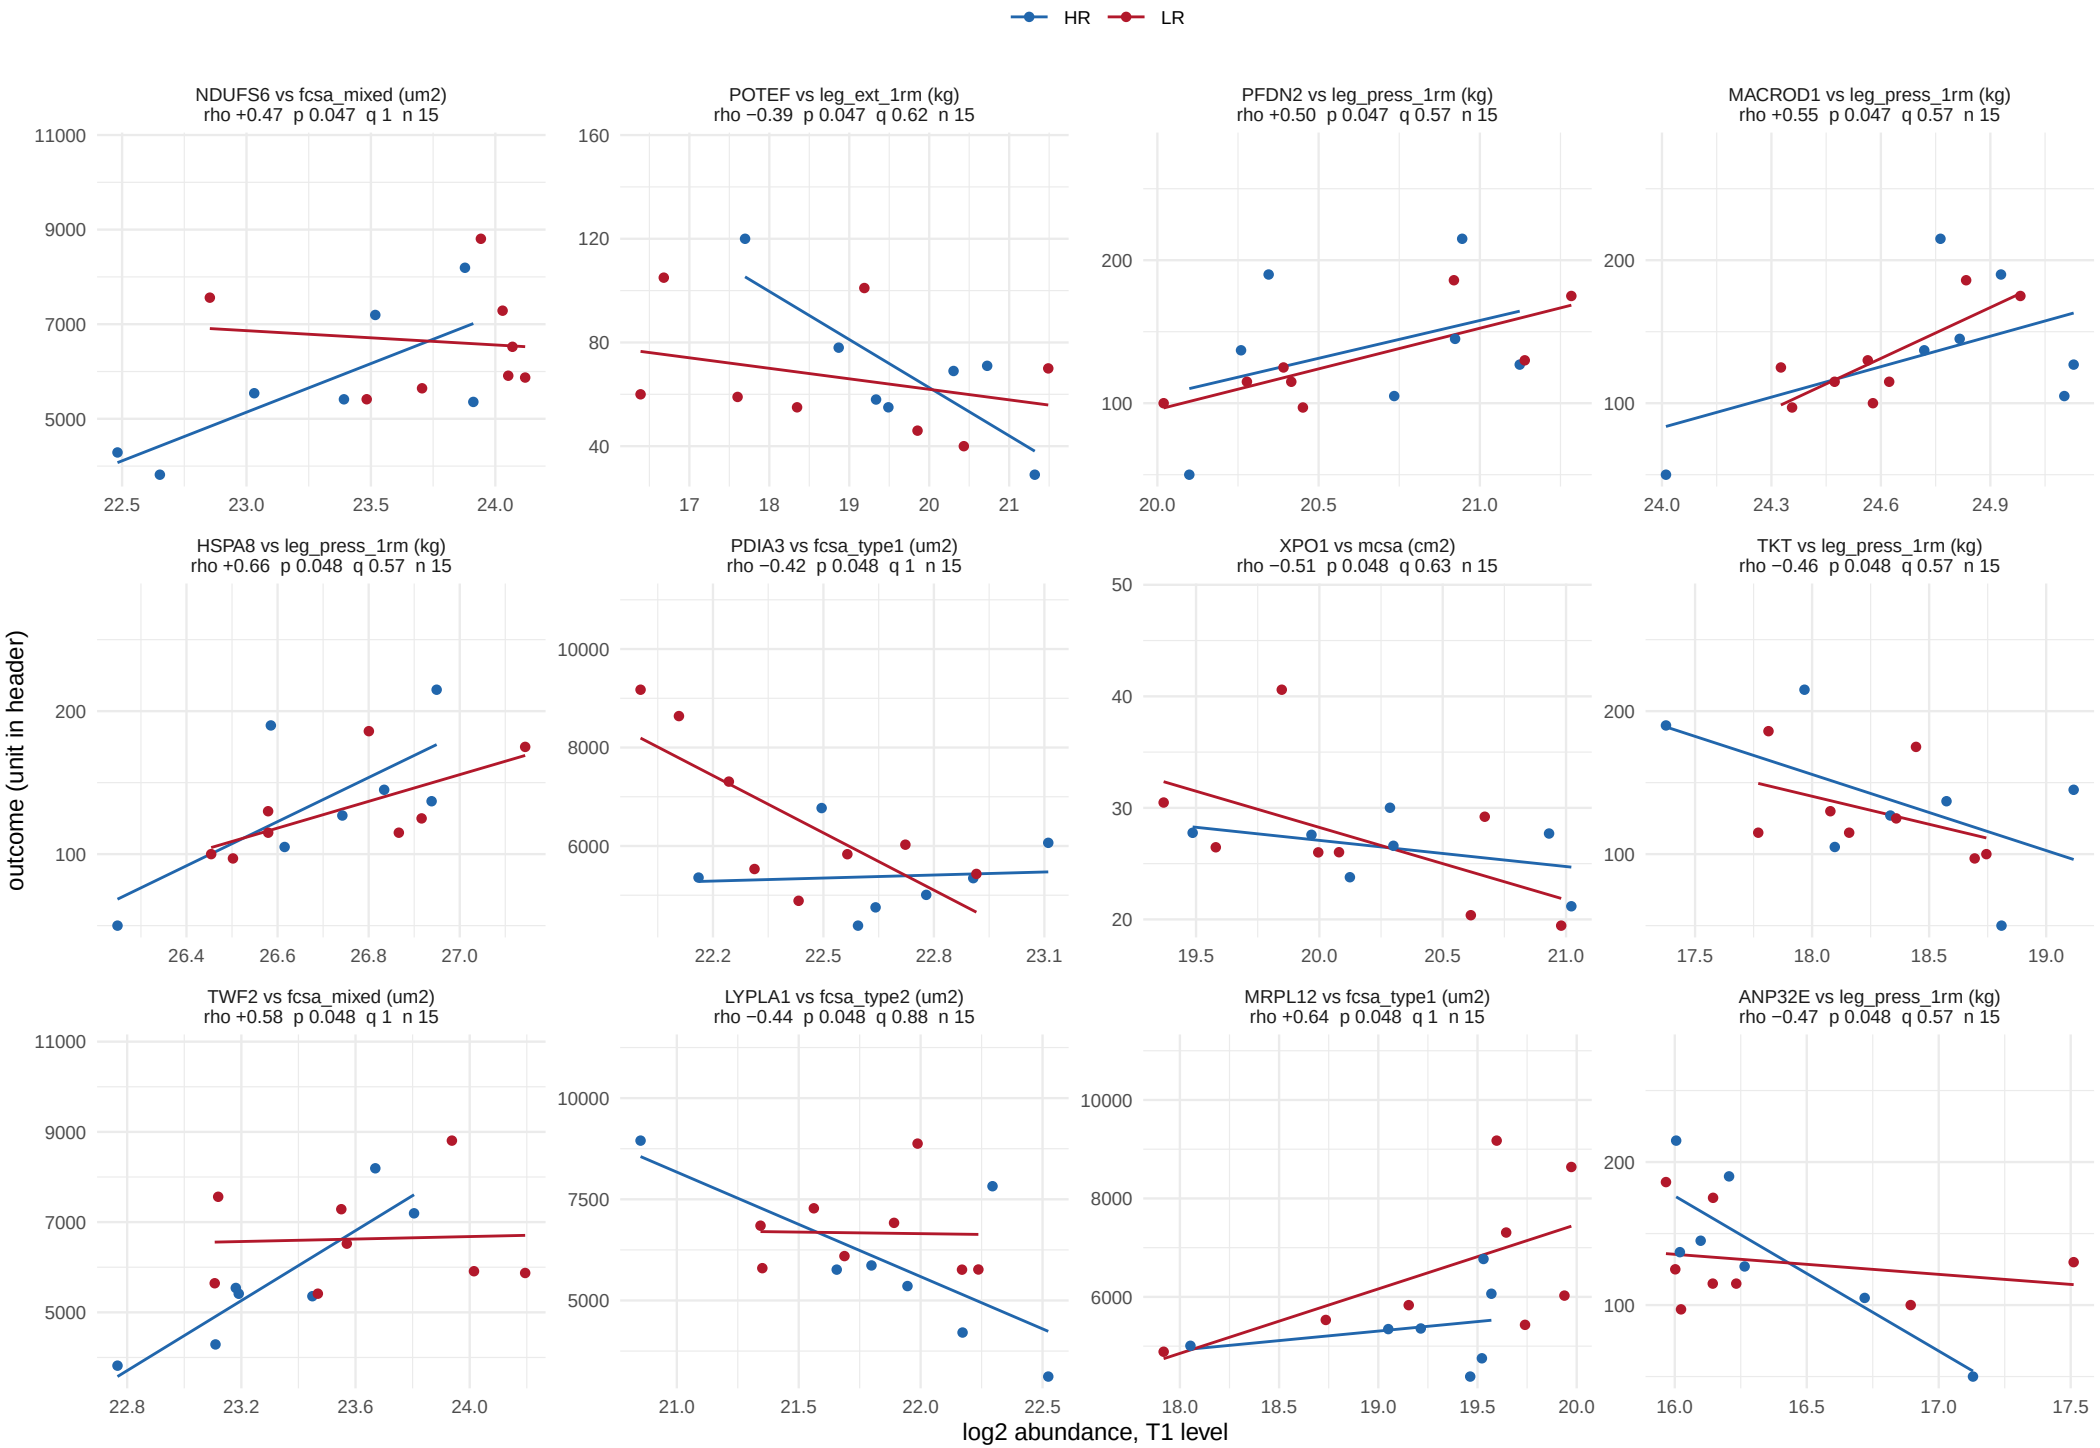

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window

693 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 57 of 58.

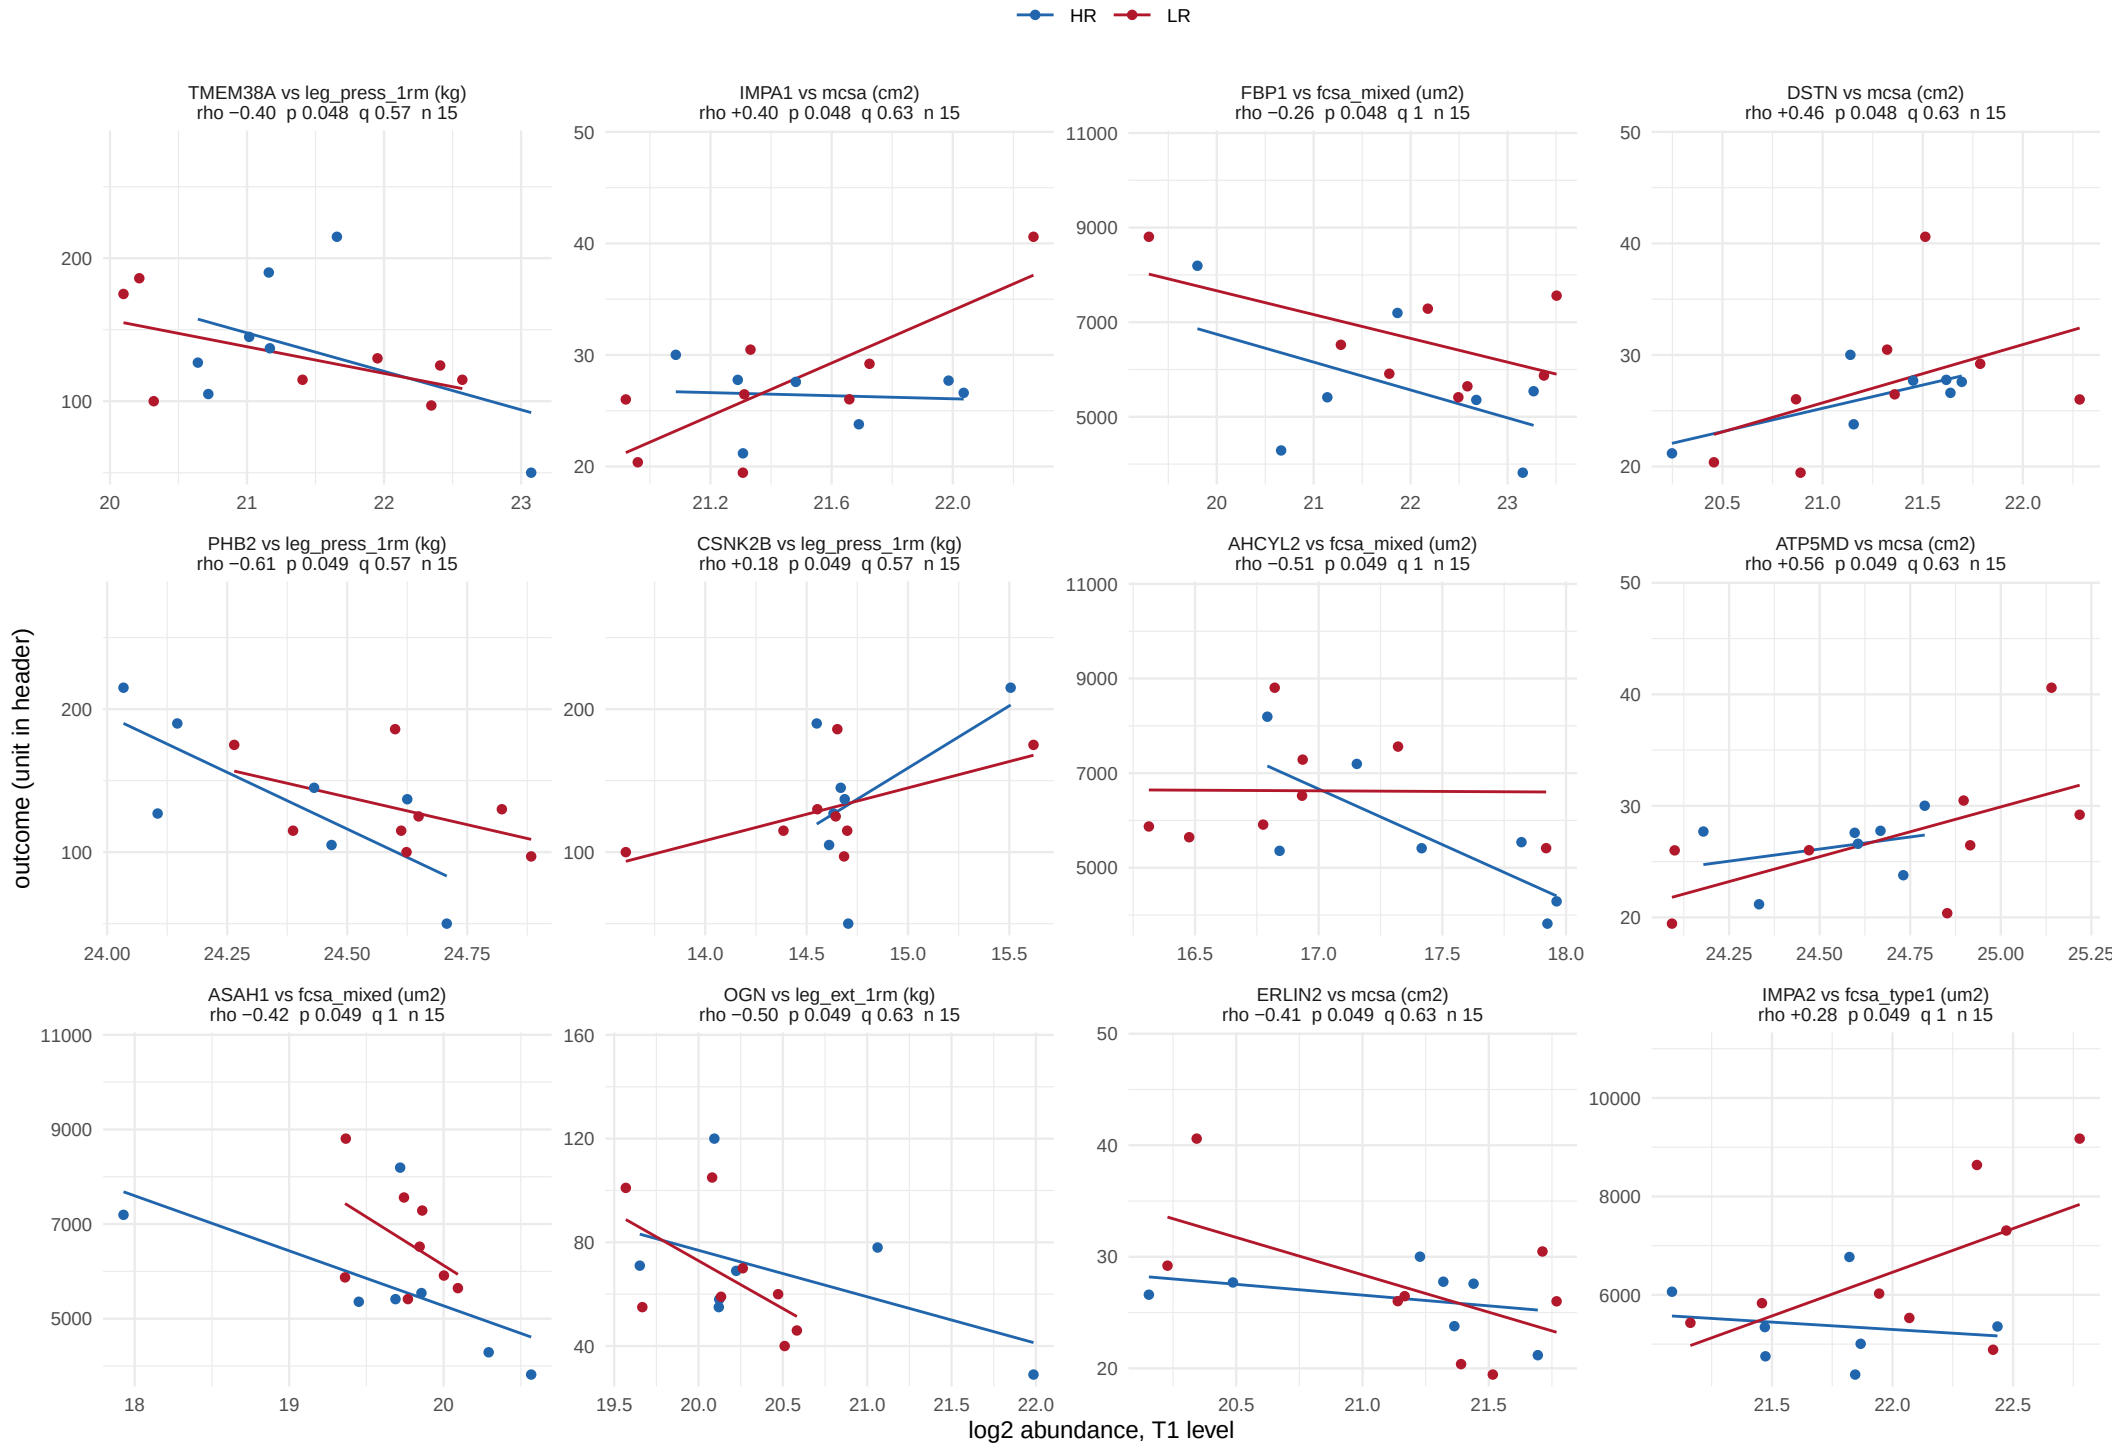

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


693 of 11400 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 58 of 58.



One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, post_level window


534 of 11400 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 1 of 45.

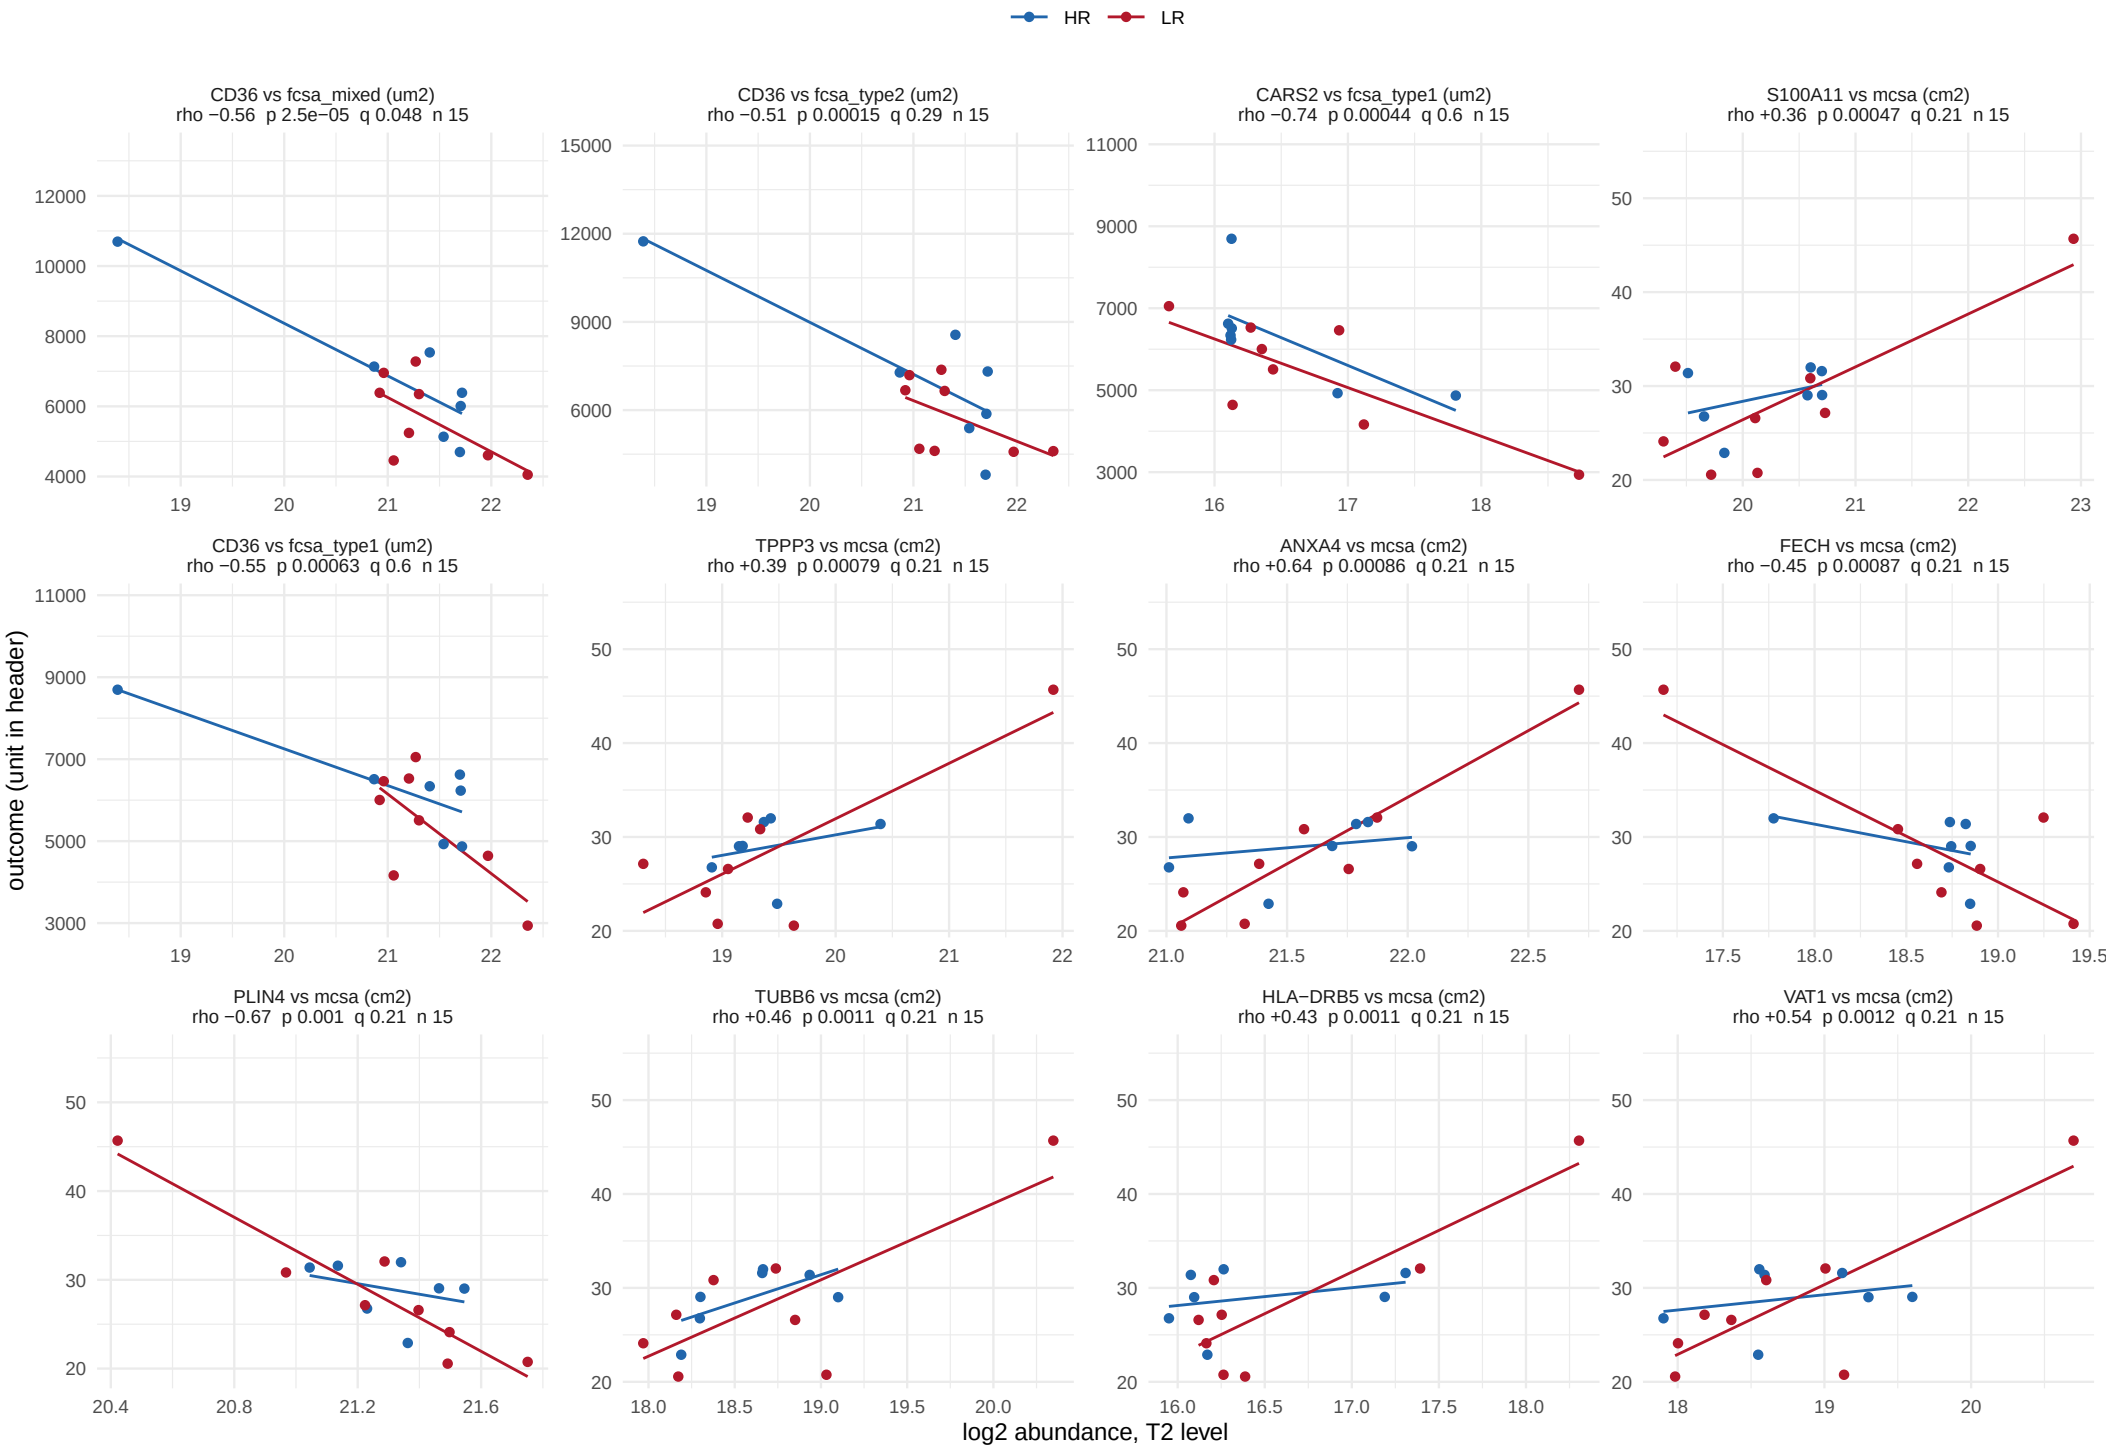

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, post_level window


534 of 11400 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 2 of 45.

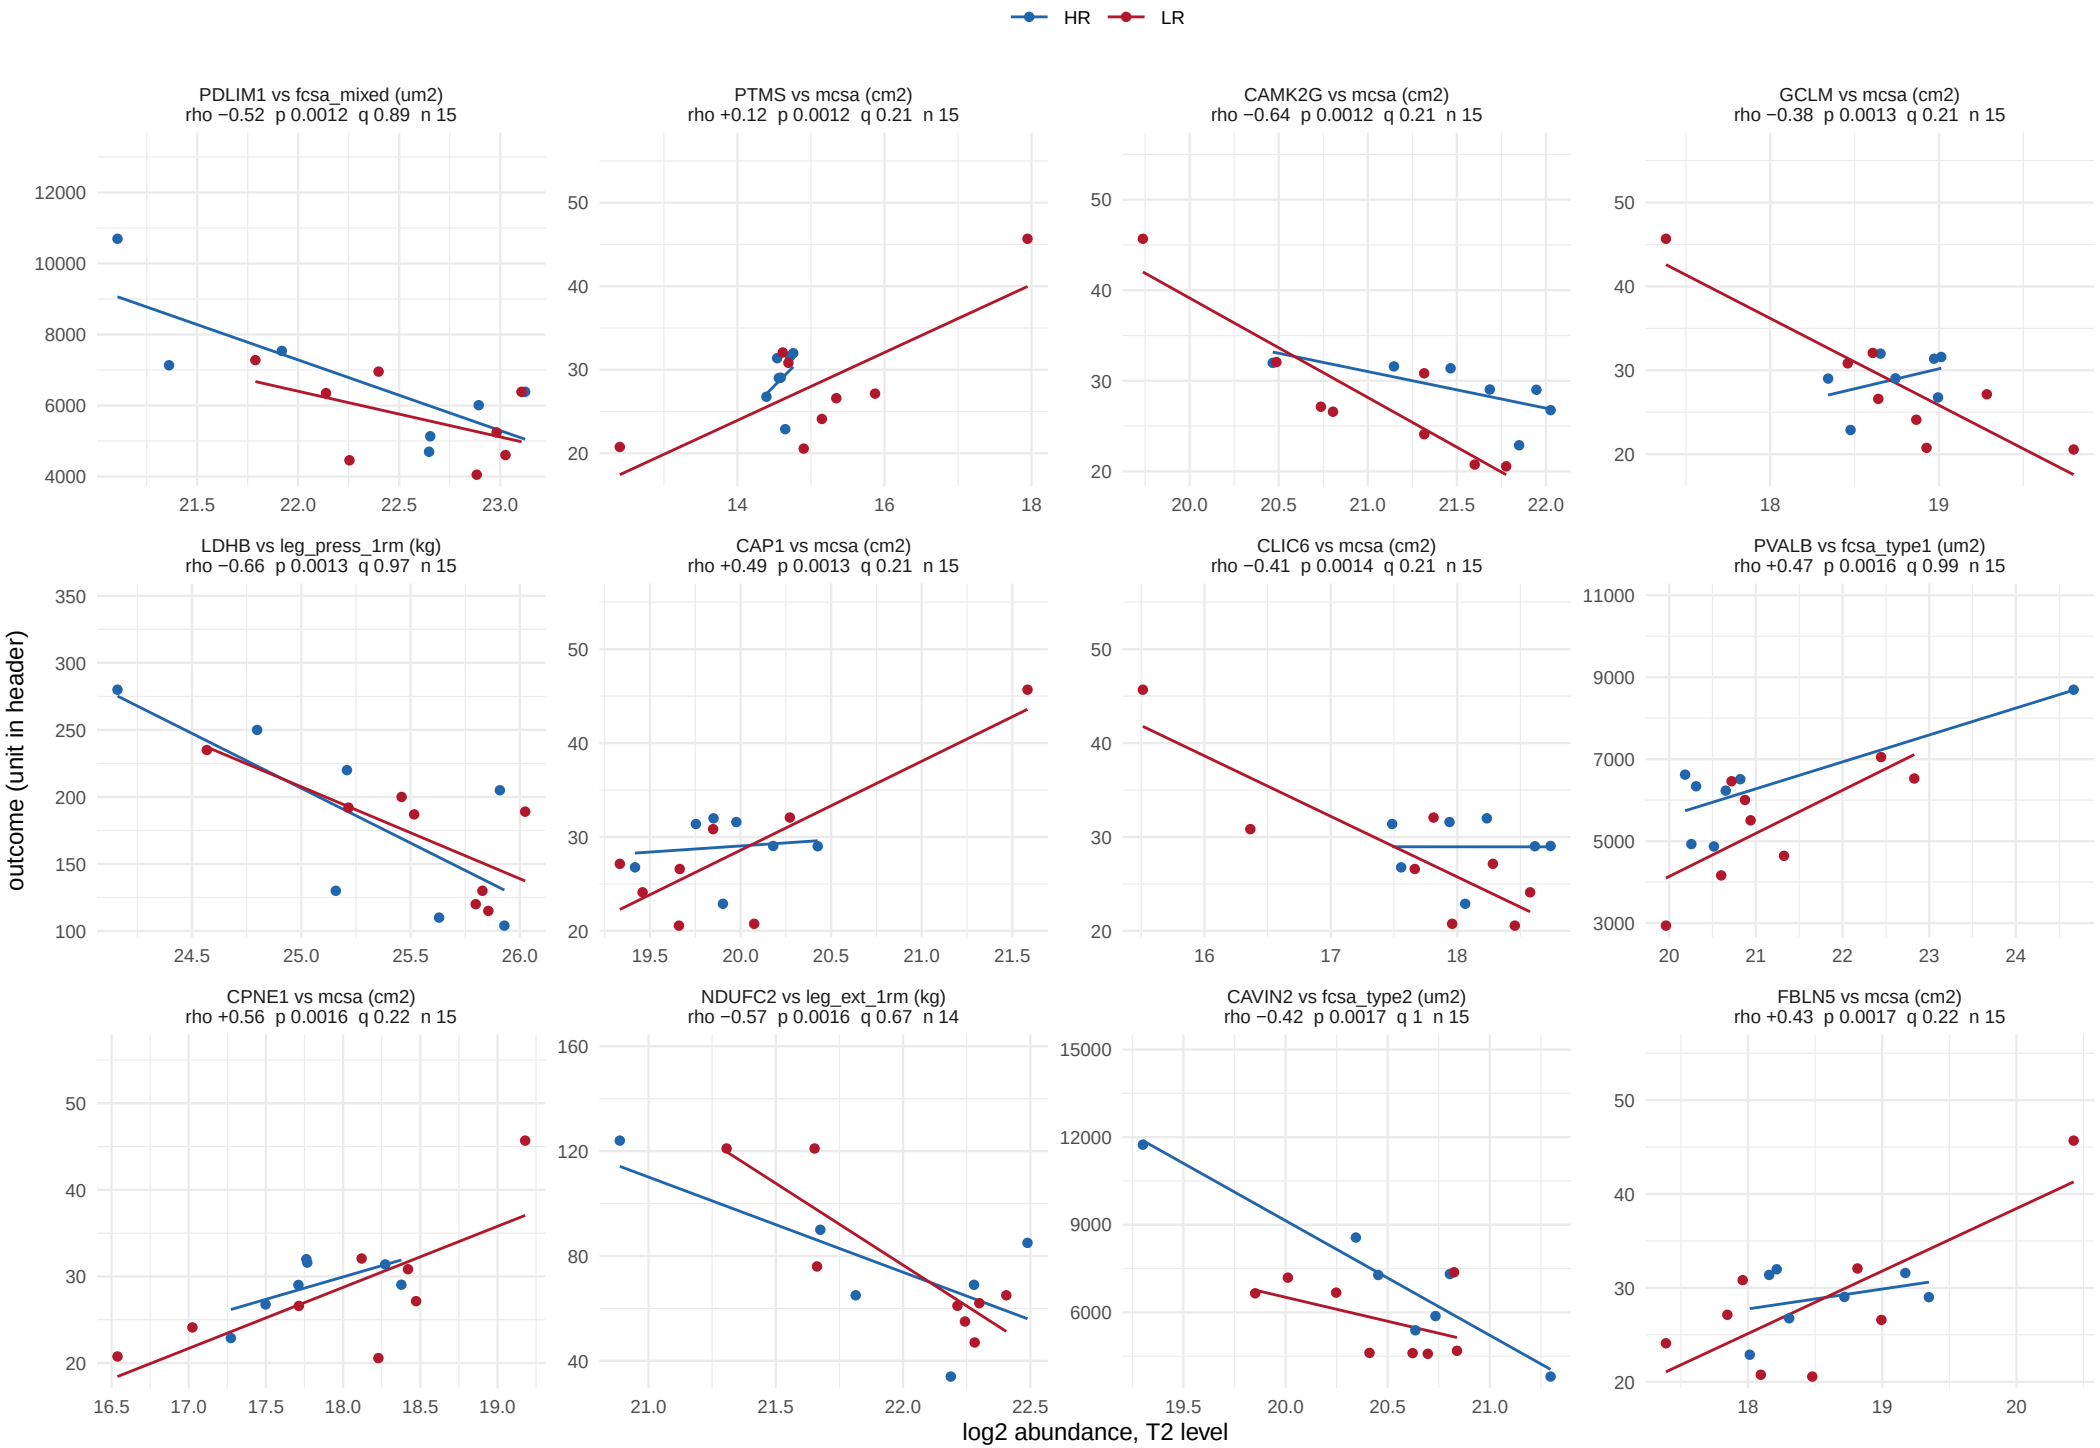

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, post_level window


534 of 11400 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 3 of 45.

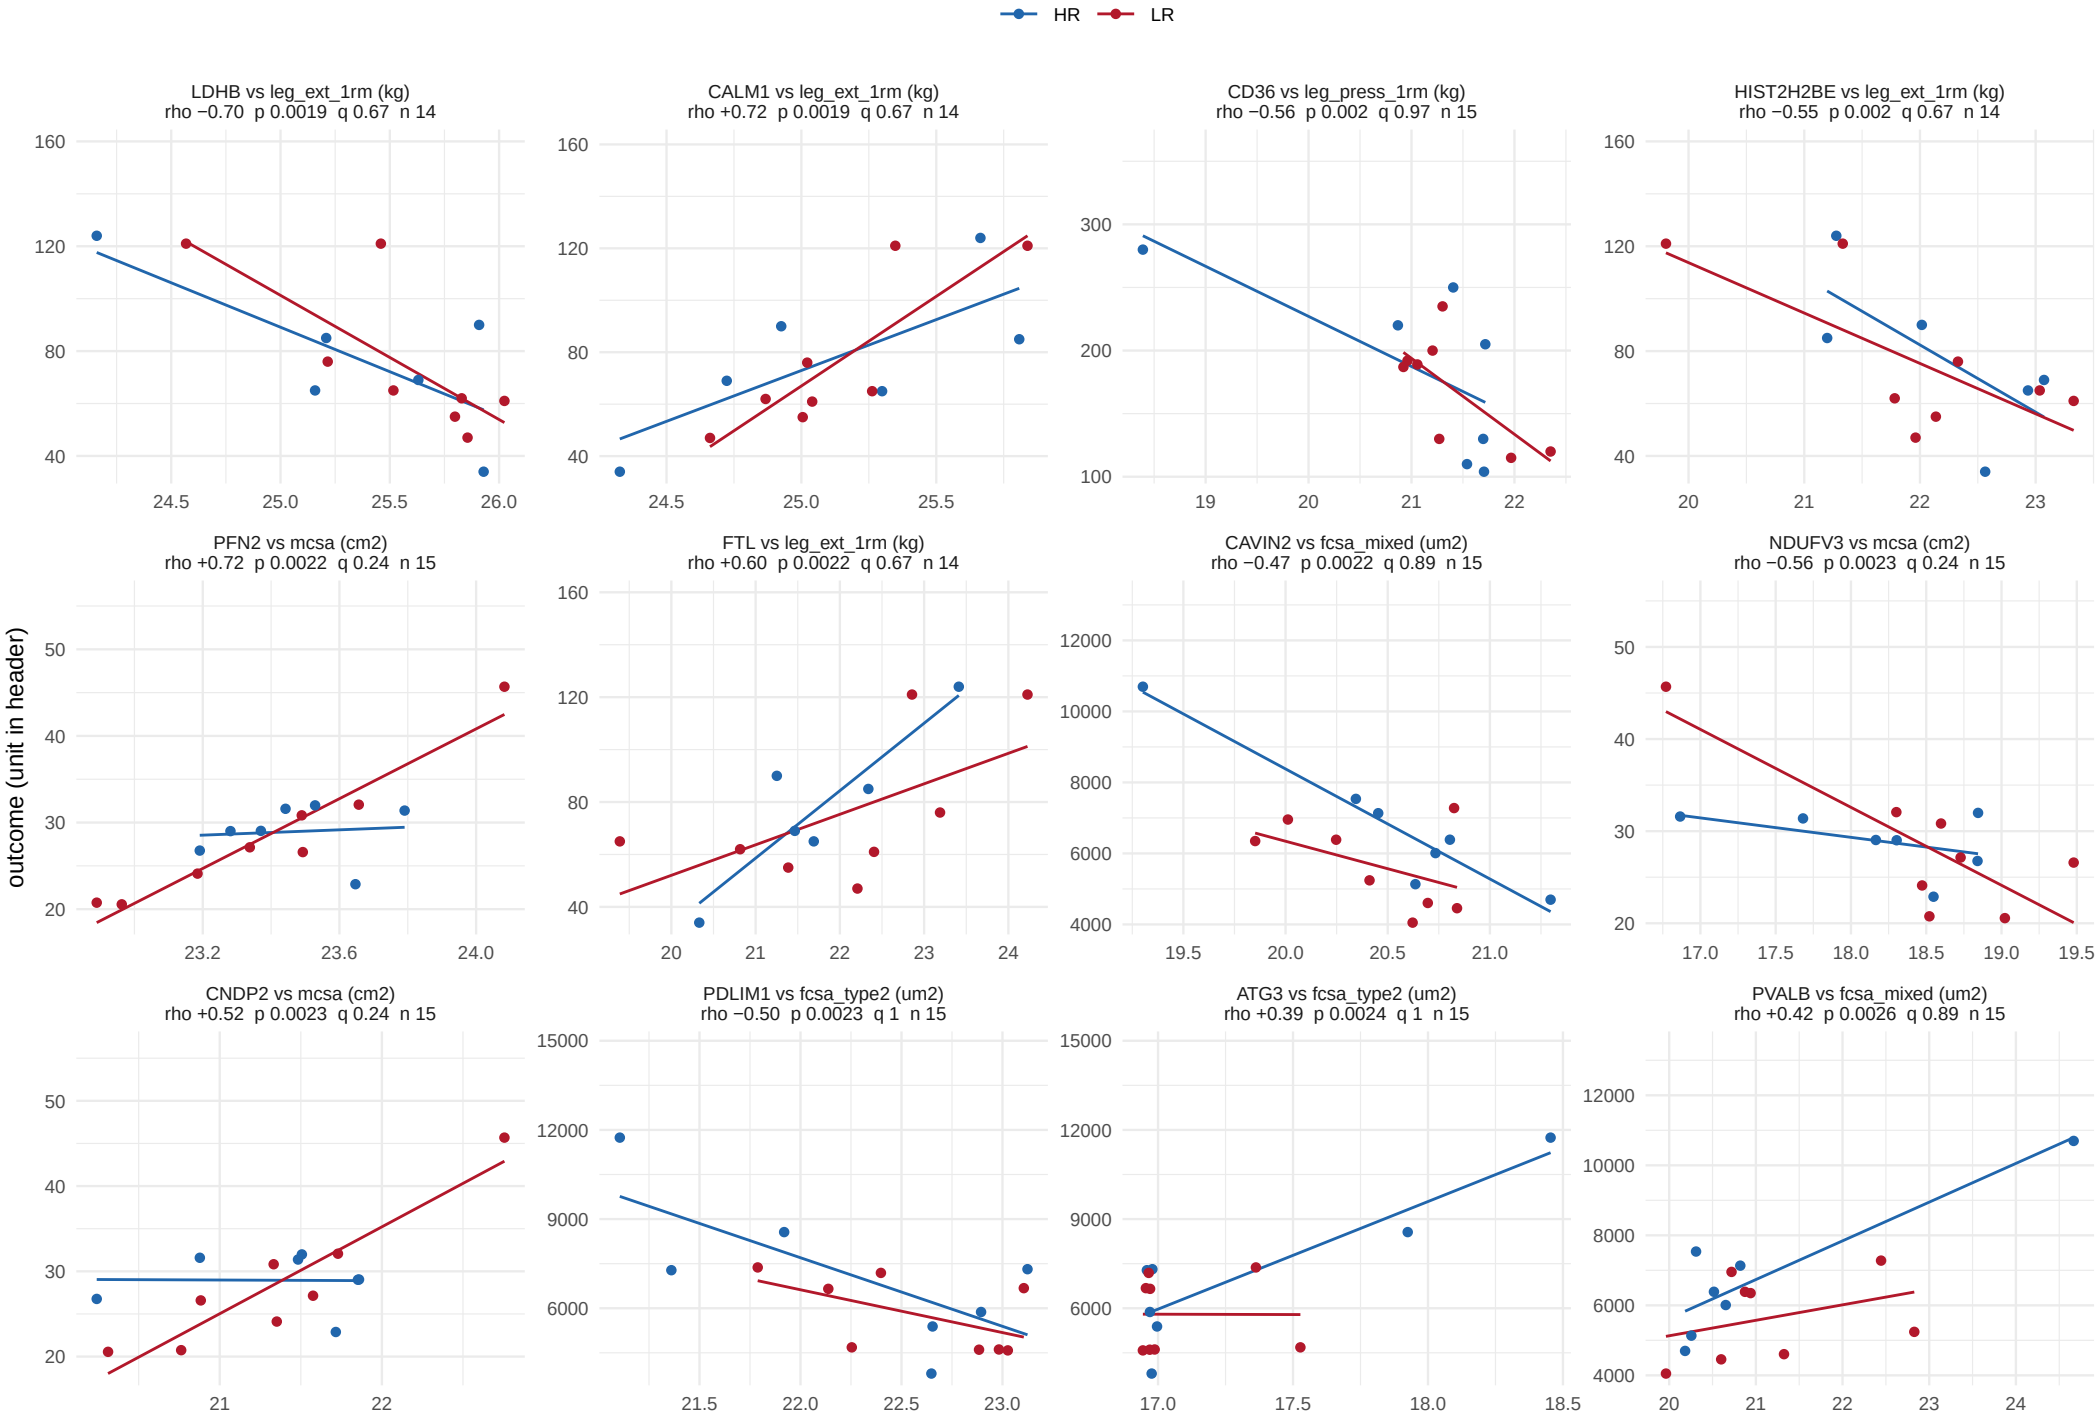

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, post_level window


534 of 11400 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 4 of 45.

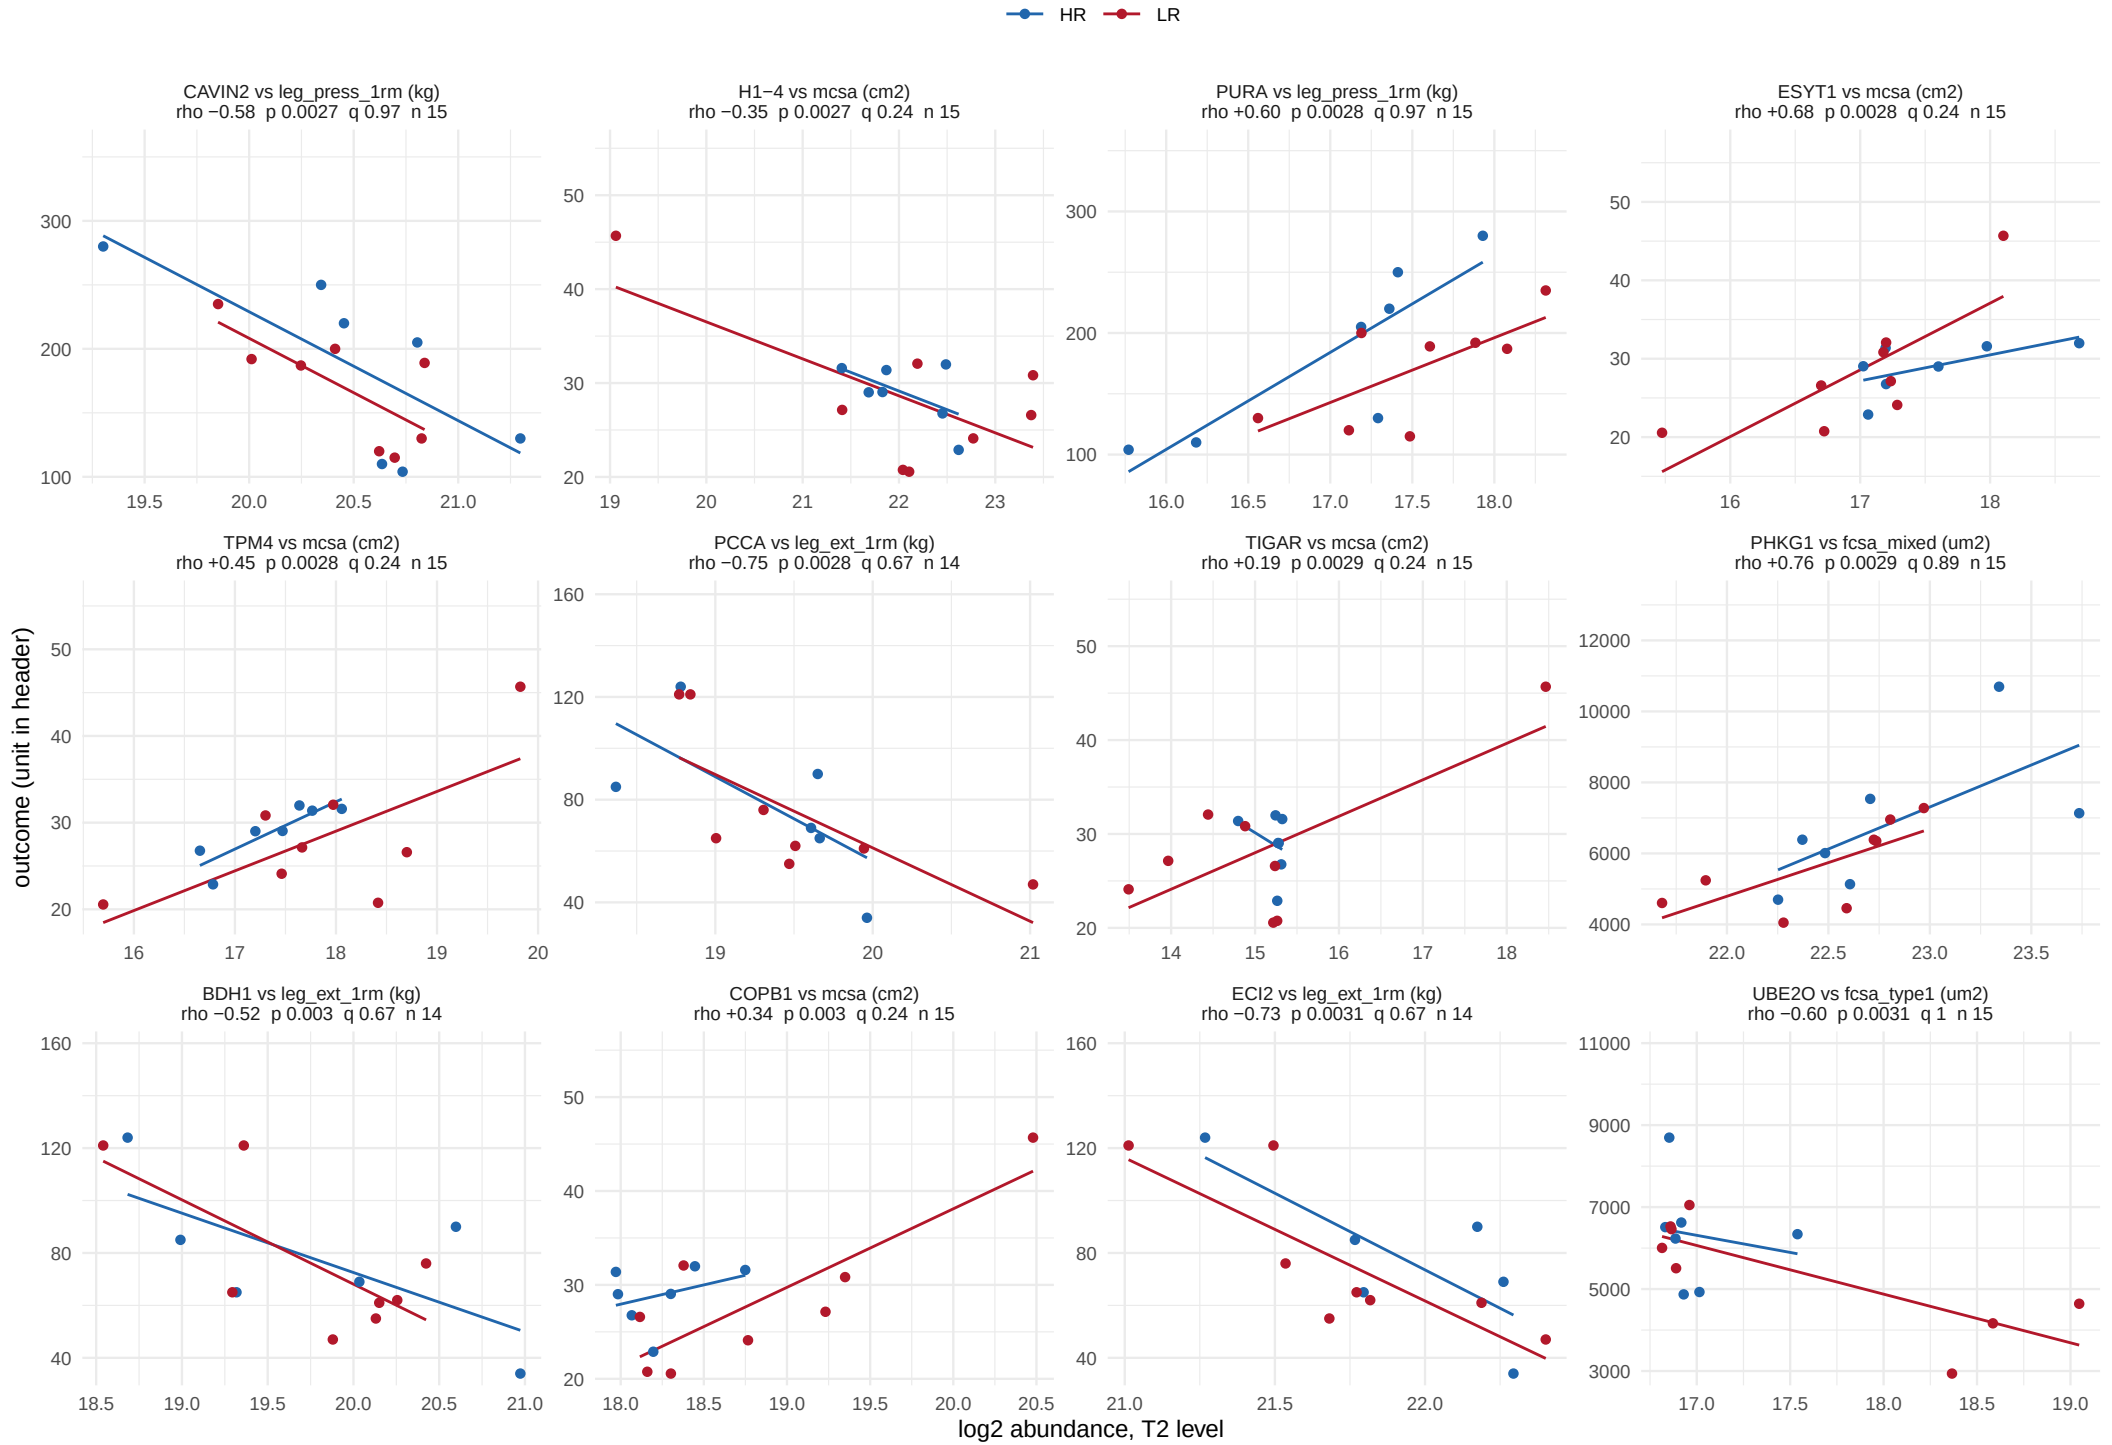

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, post_level window


534 of 11400 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 5 of 45.

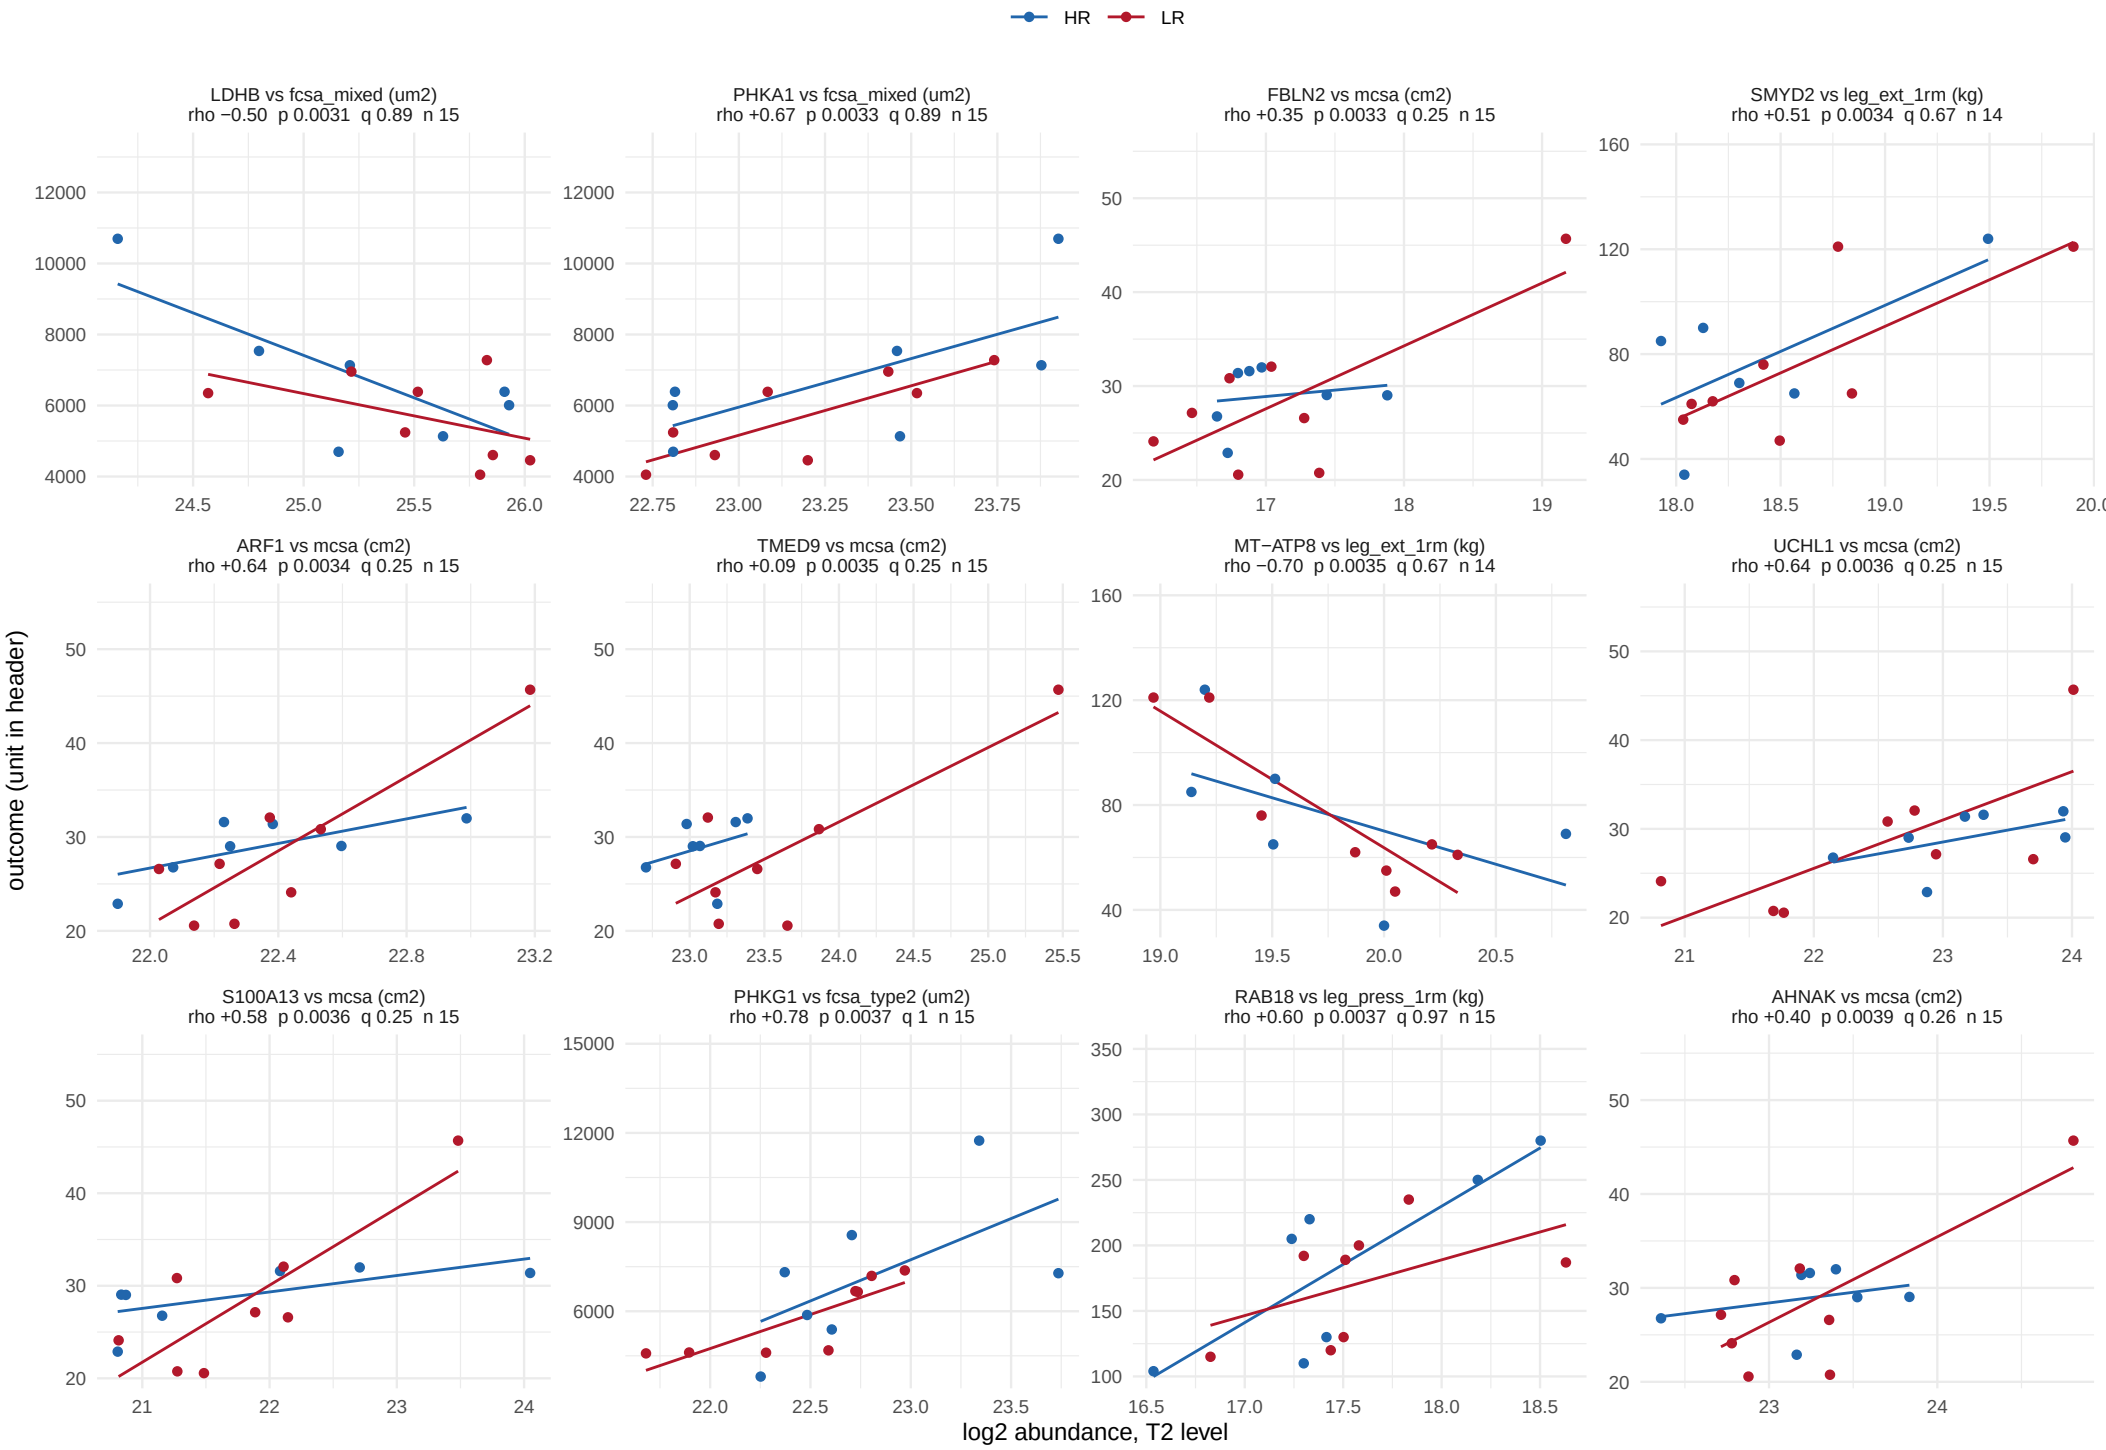

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, post_level window


534 of 11400 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 6 of 45.

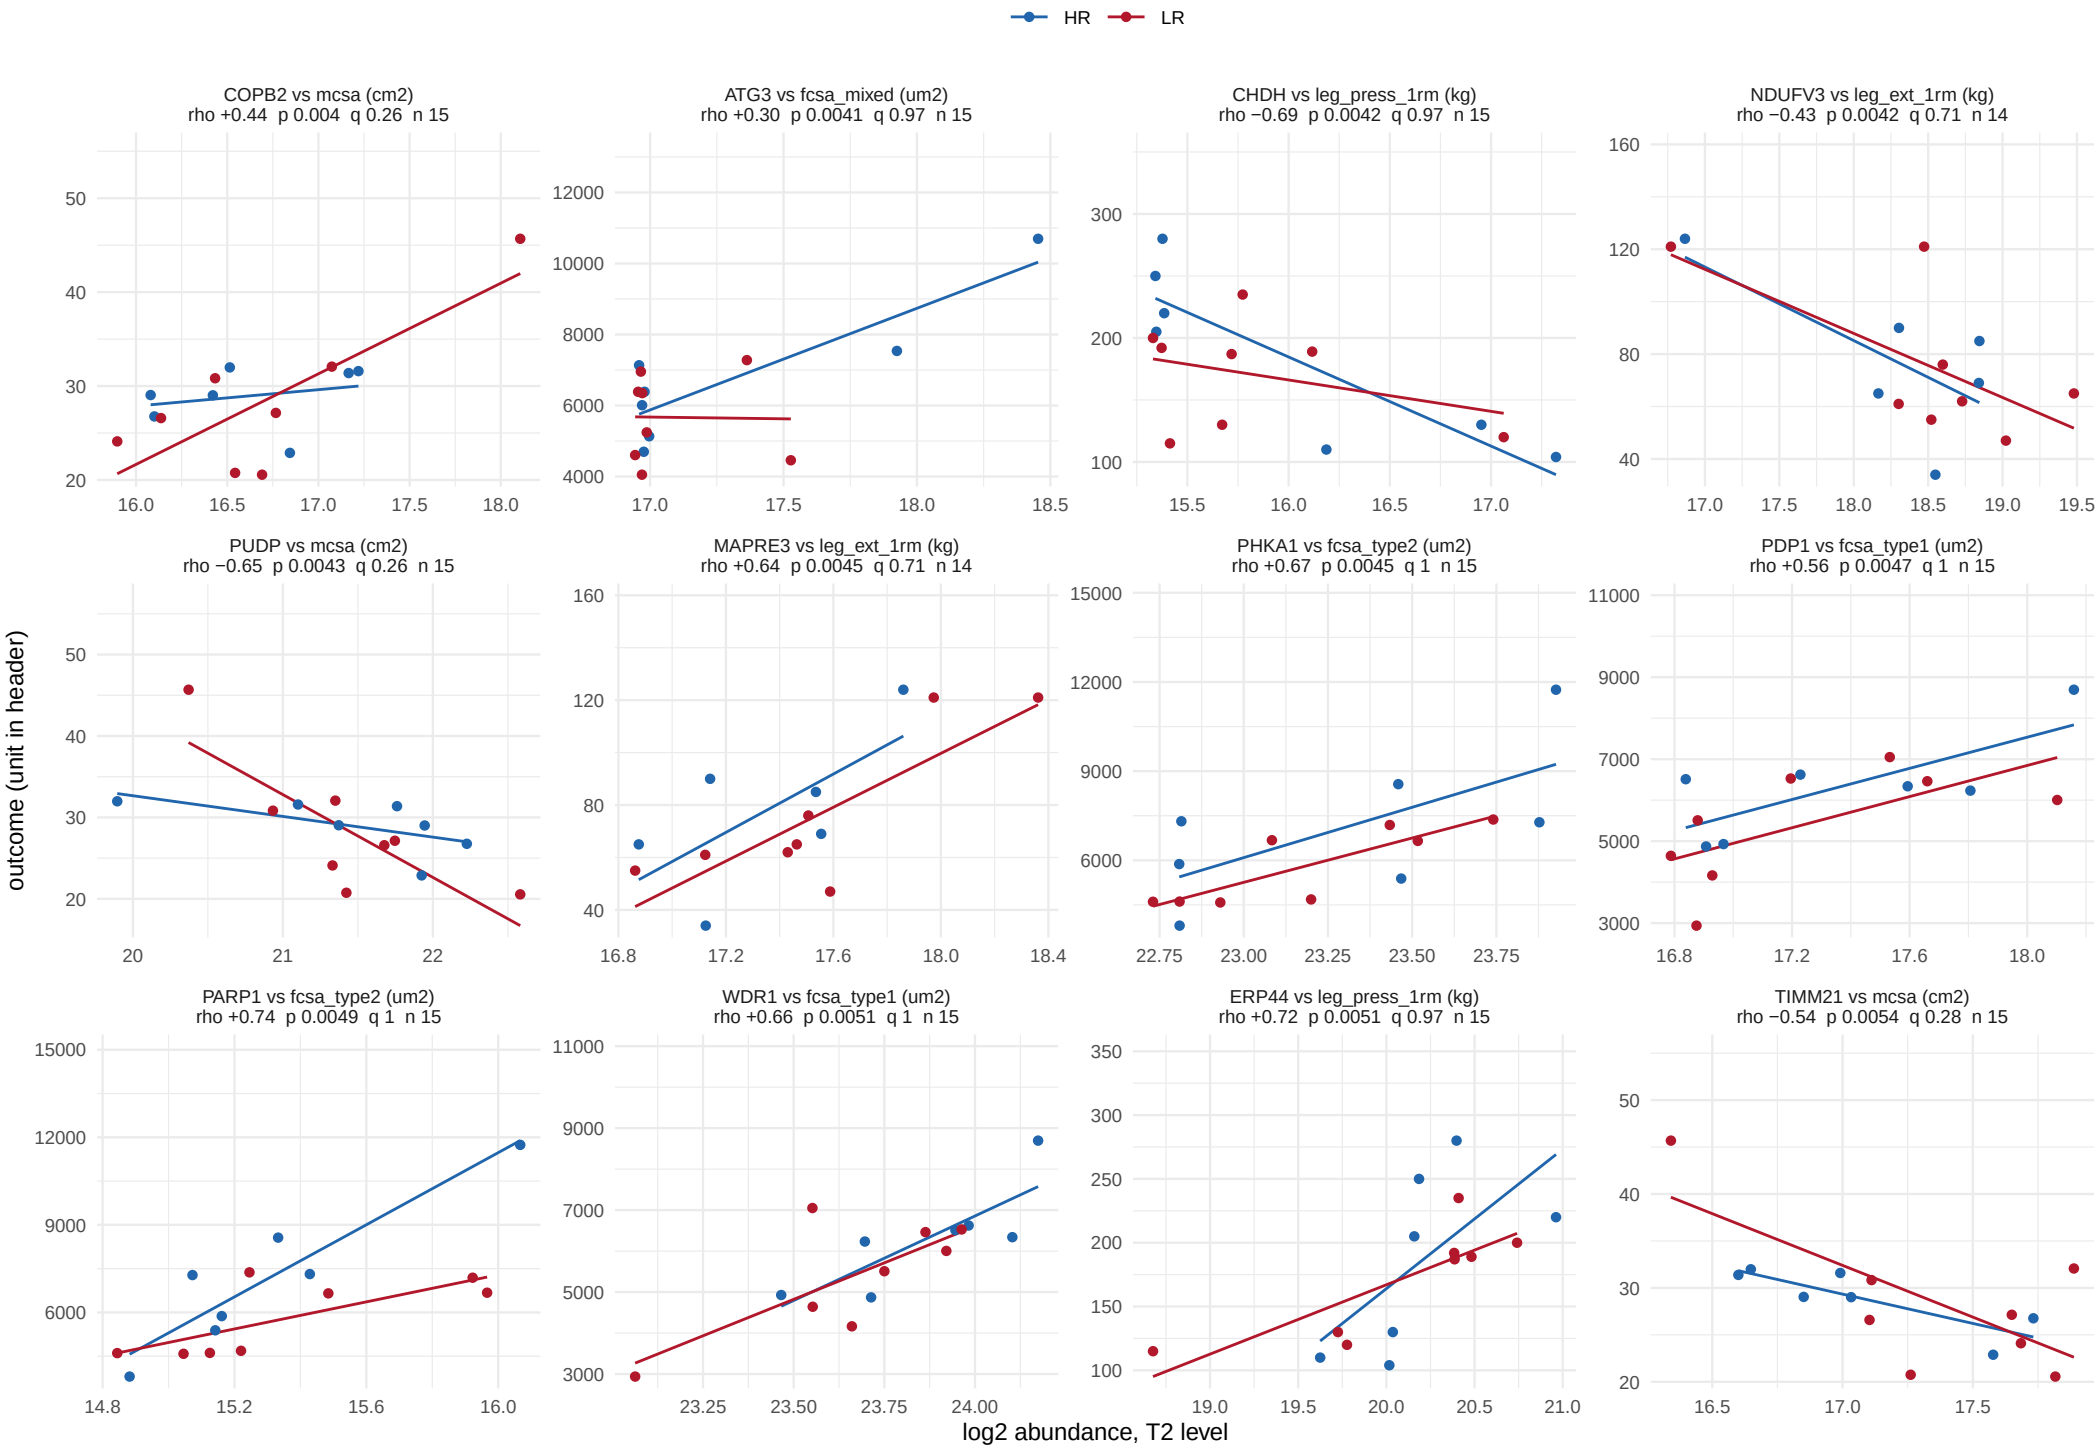

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, post_level window

534 of 11400 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 7 of 45.

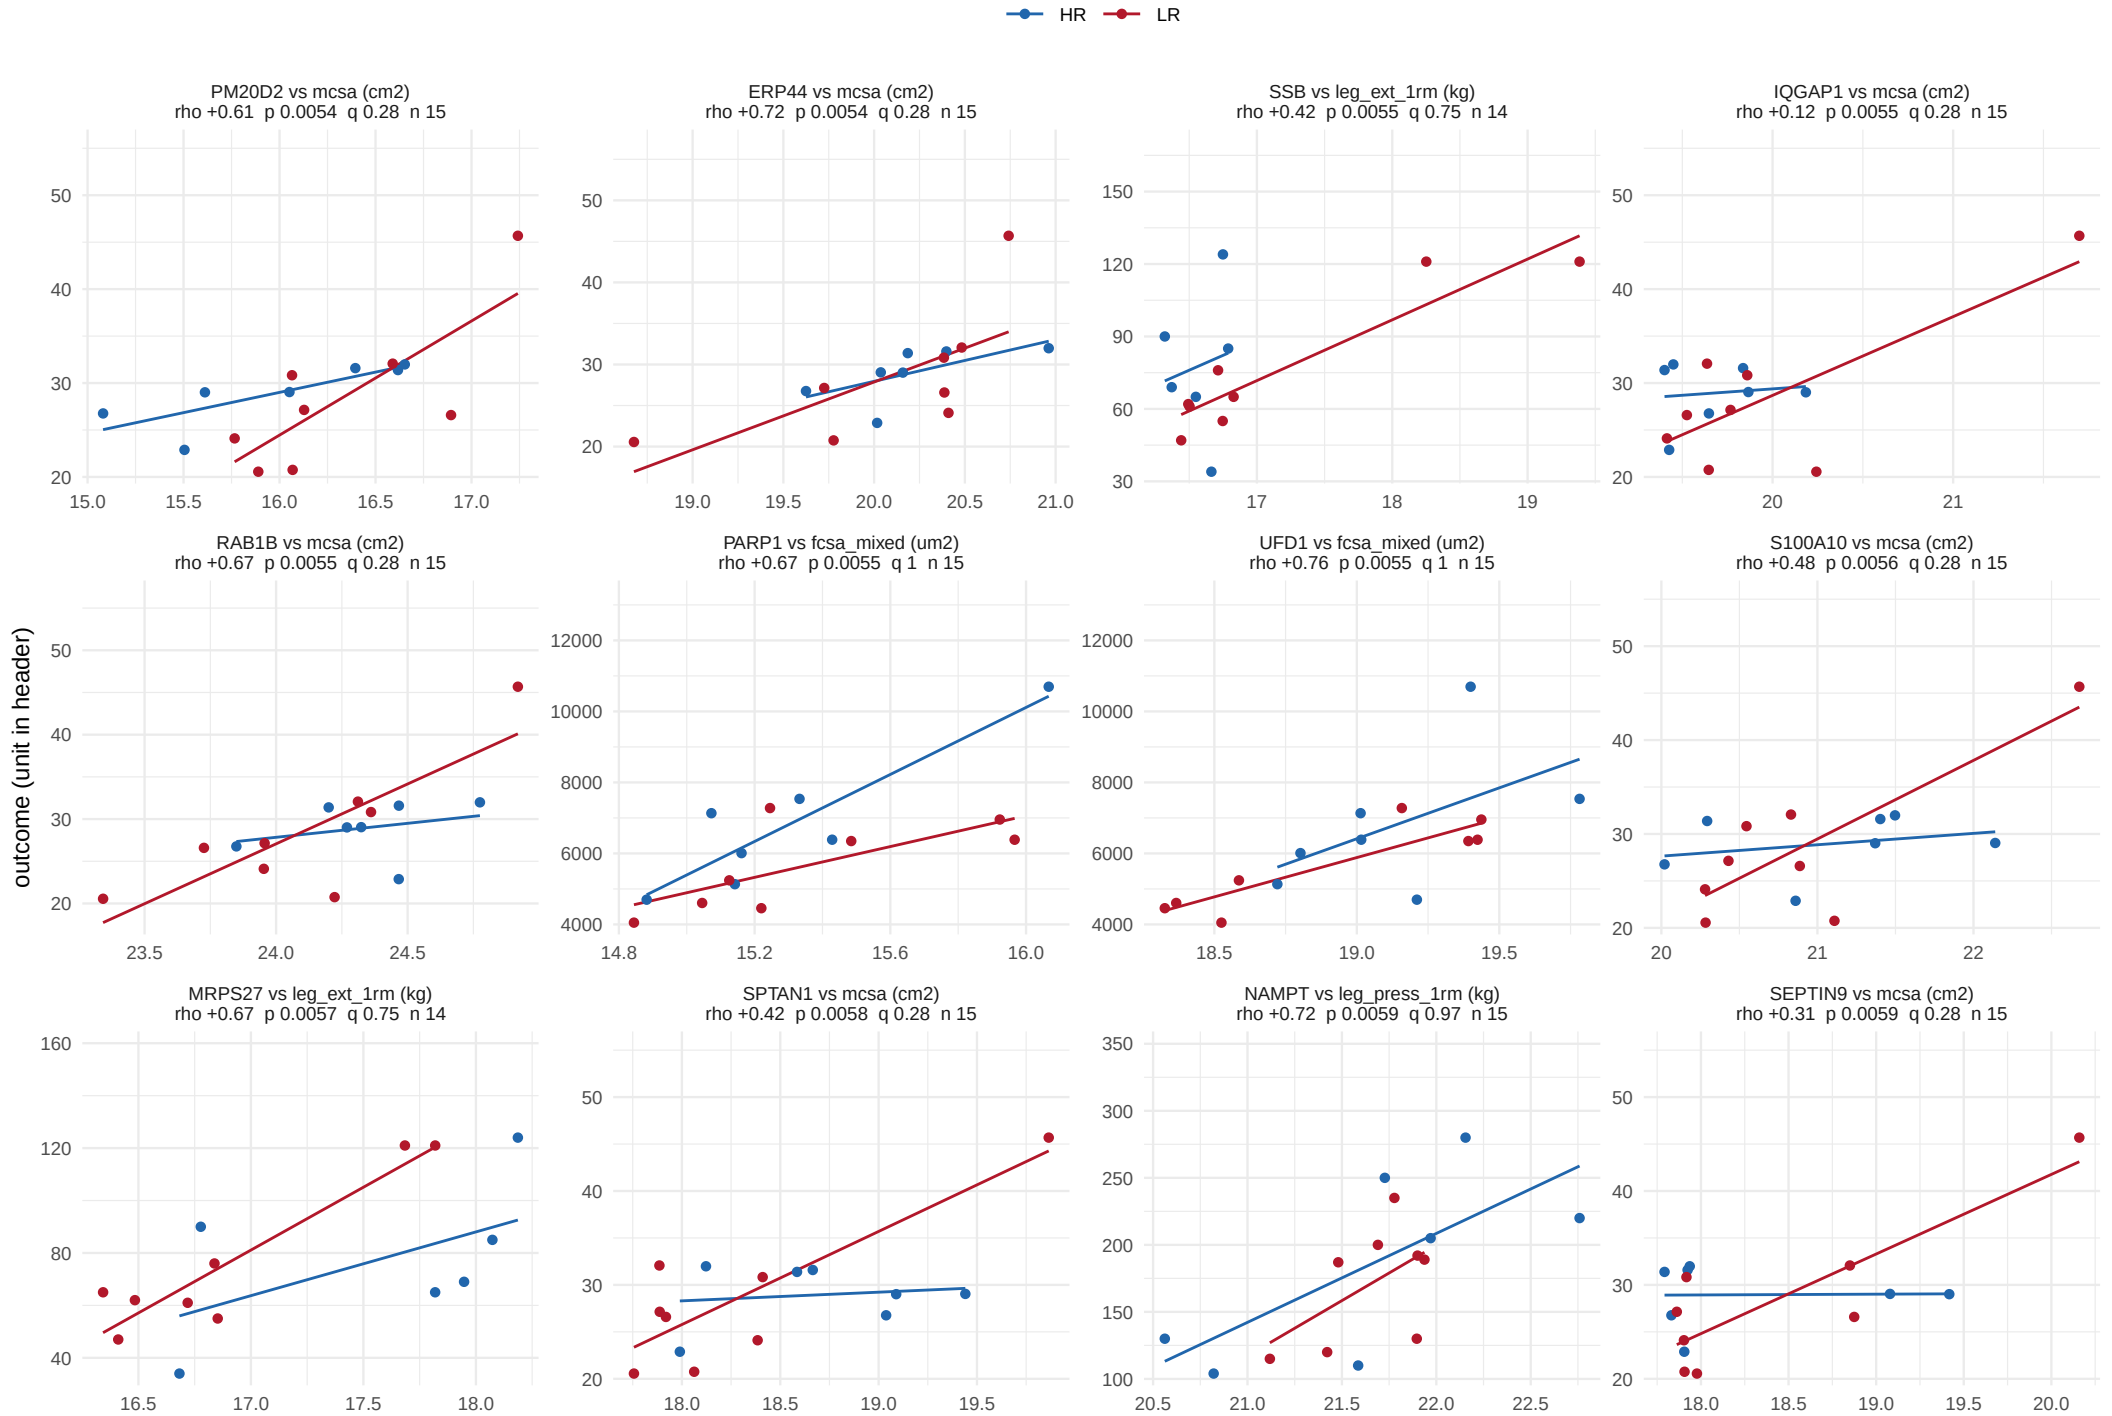

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, post_level window


534 of 11400 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 8 of 45.



One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, post_level window


534 of 11400 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 9 of 45.

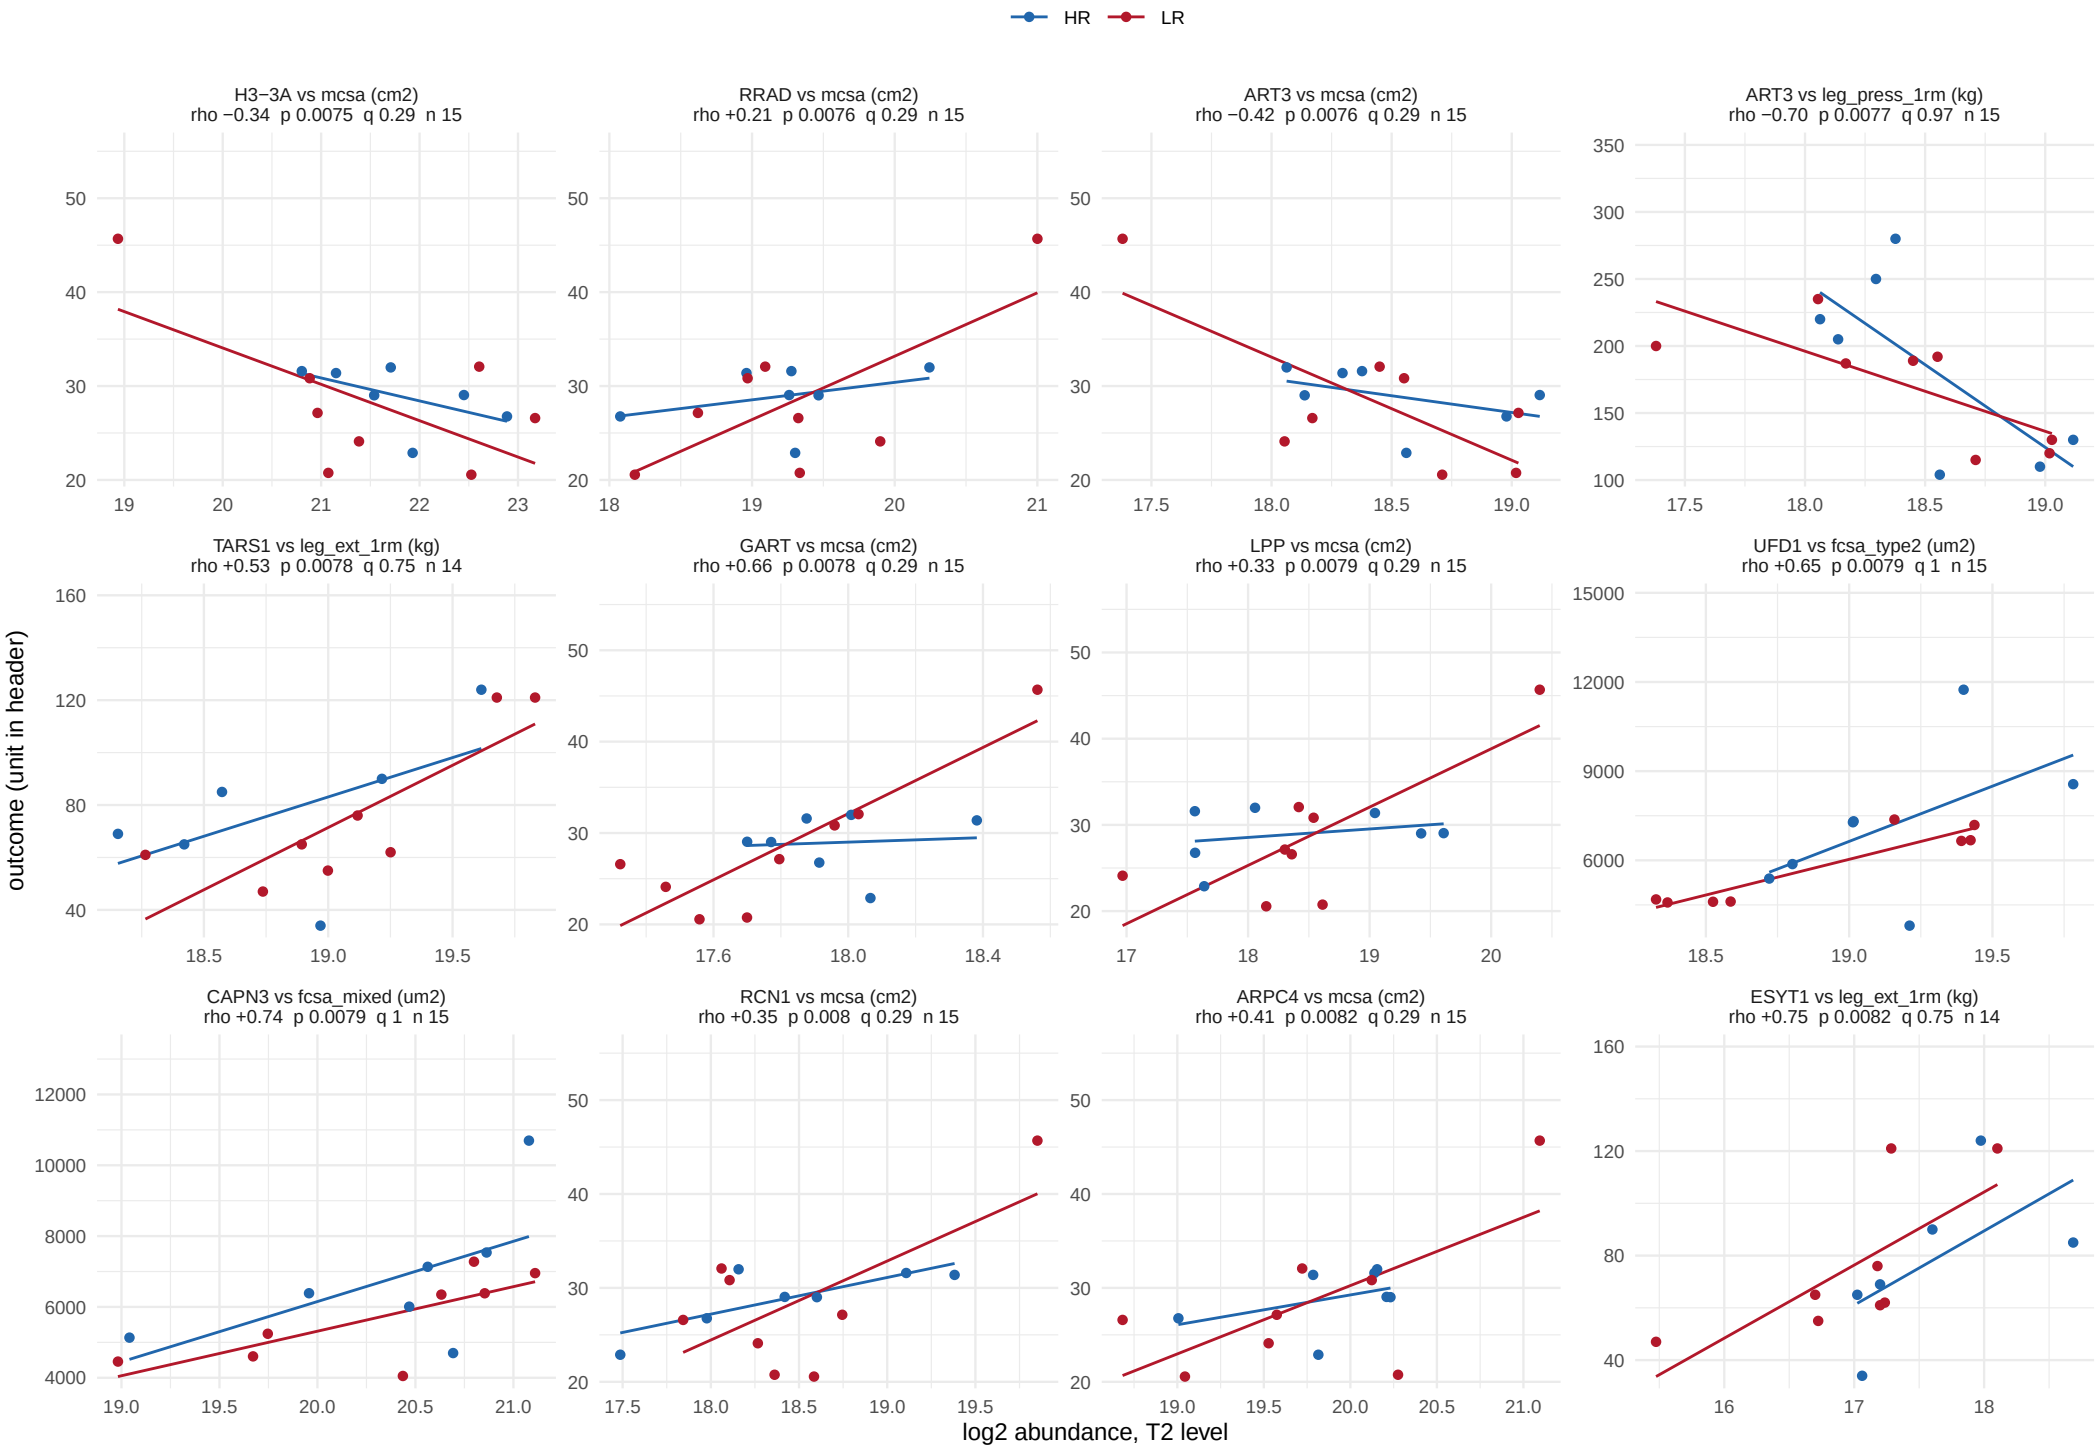

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, post_level window

534 of 11400 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 10 of 45.

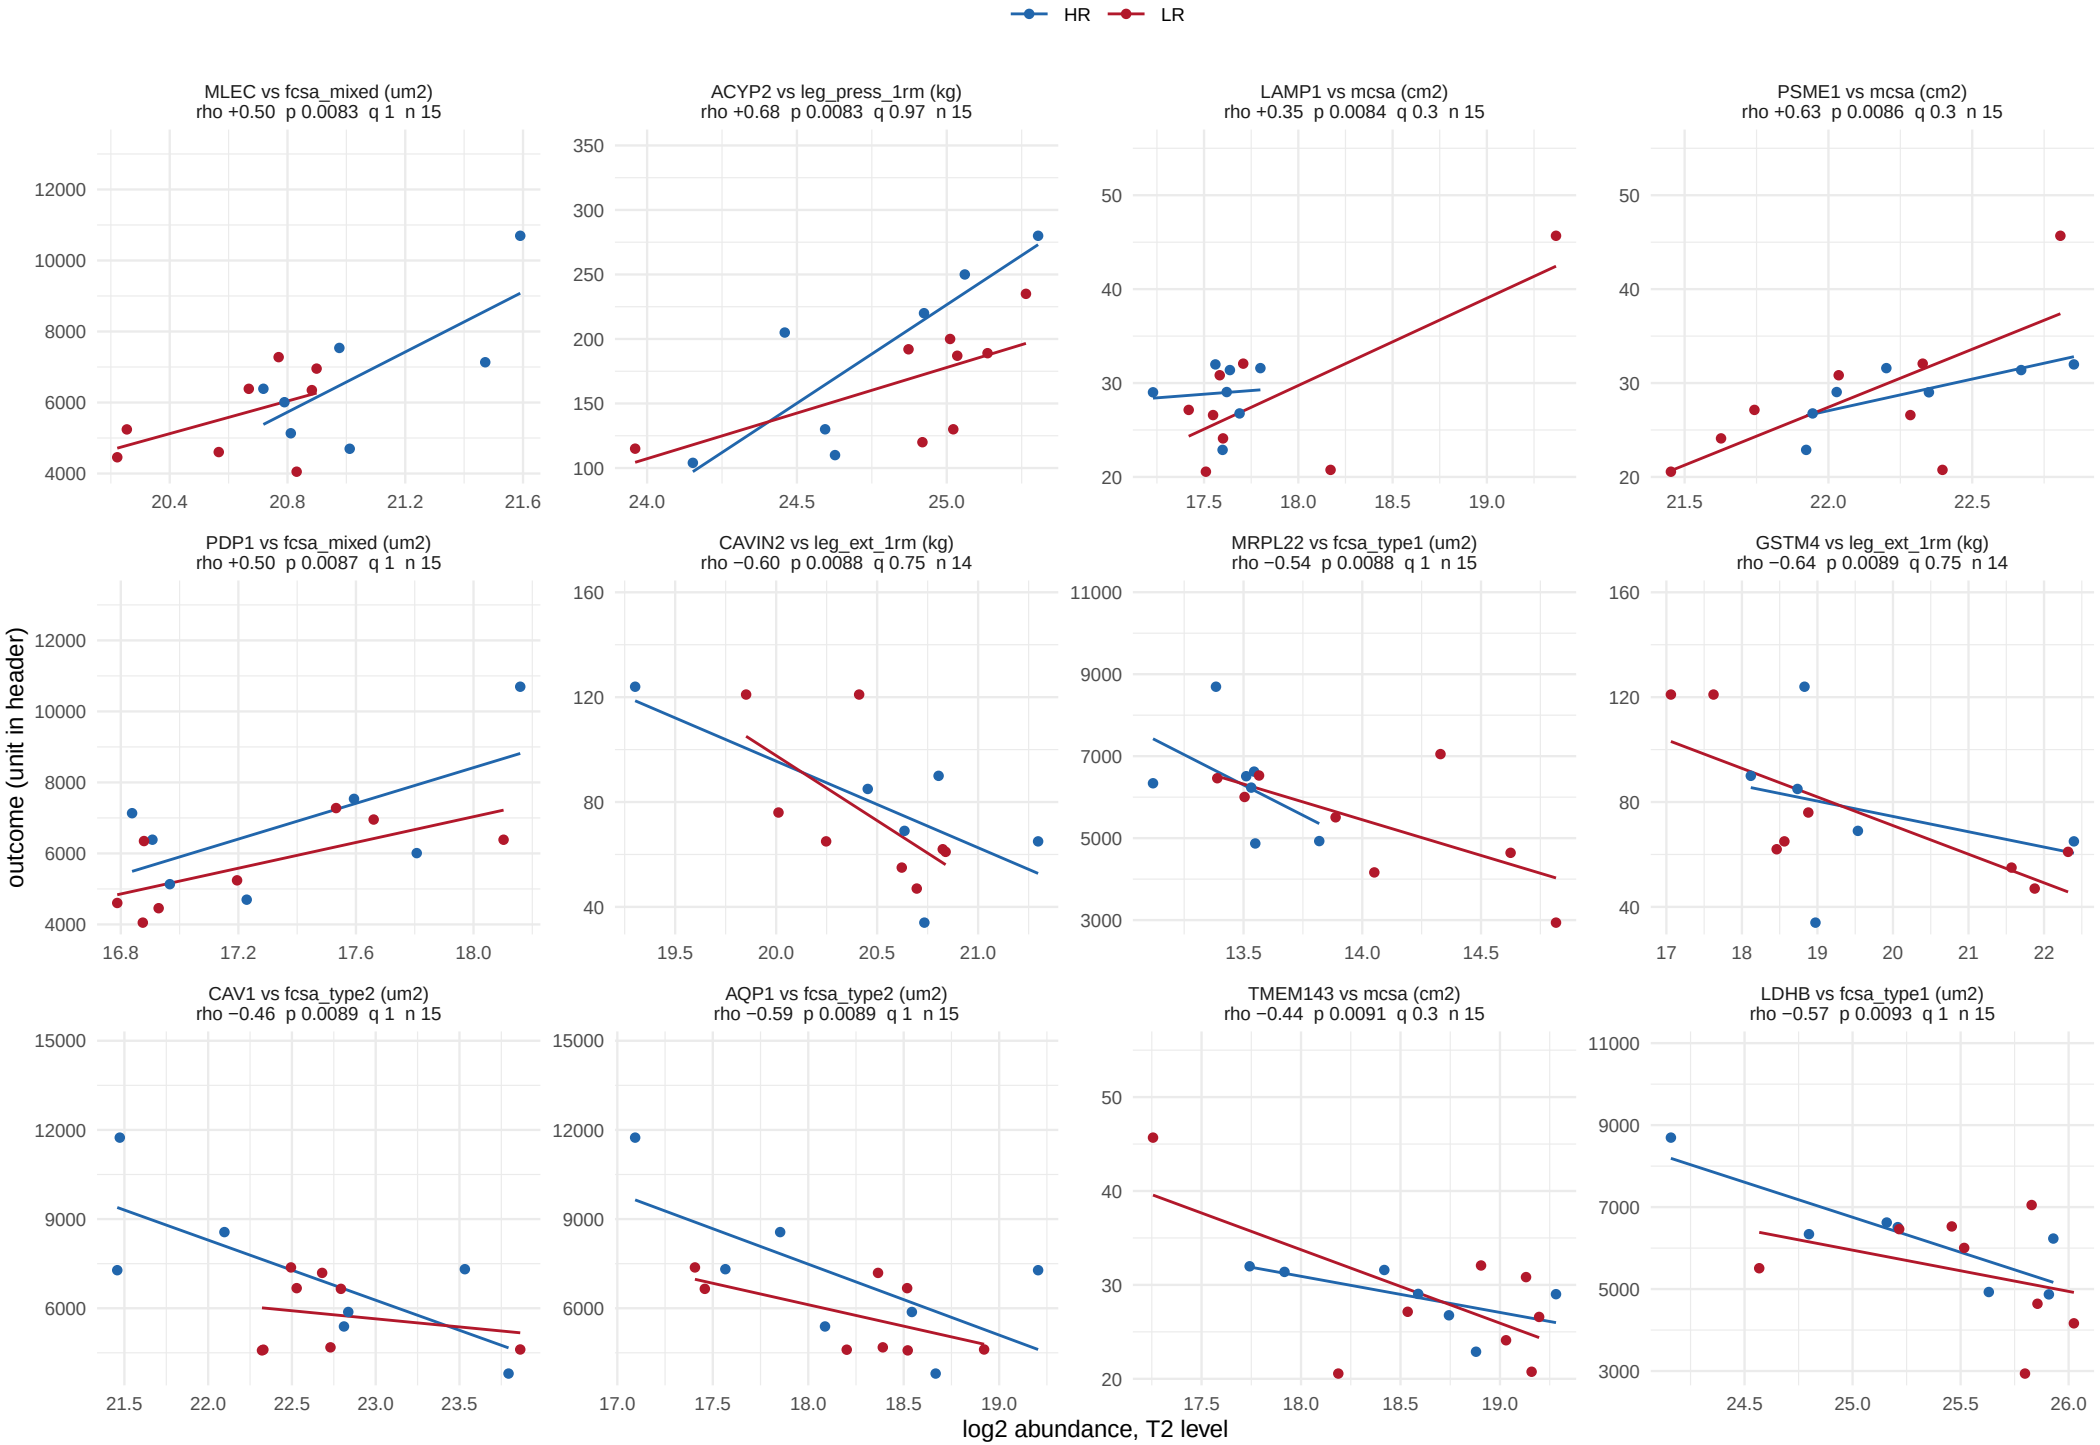

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, post_level window


534 of 11400 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 11 of 45.



One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, post_level window

534 of 11400 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 12 of 45.

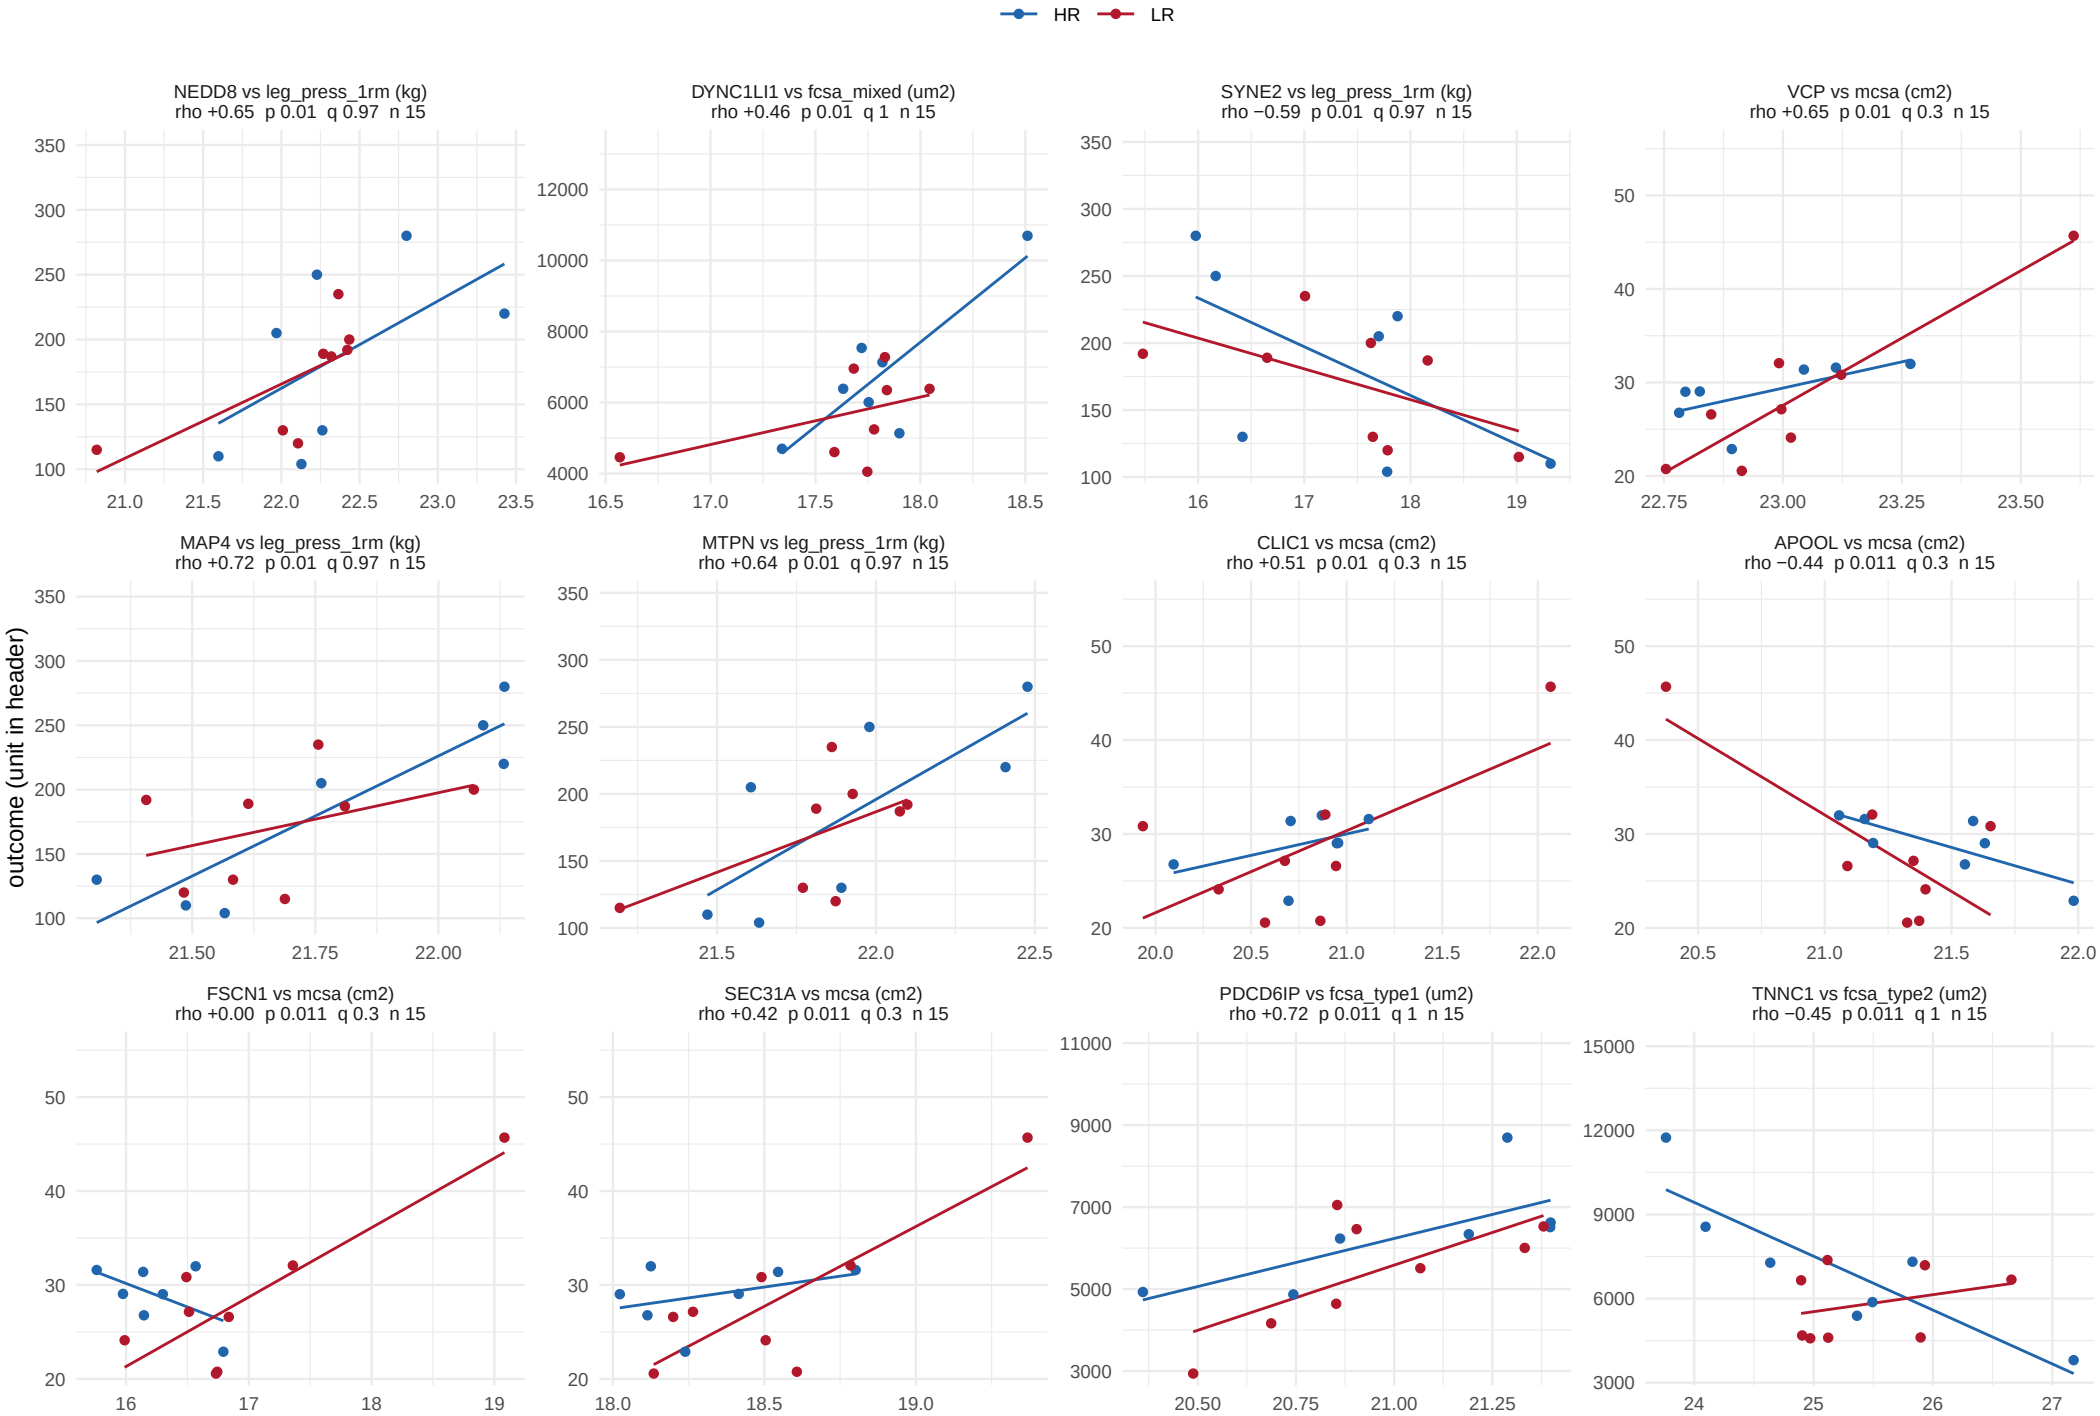

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, post_level window


534 of 11400 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 13 of 45.



One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, post_level window


534 of 11400 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 14 of 45.

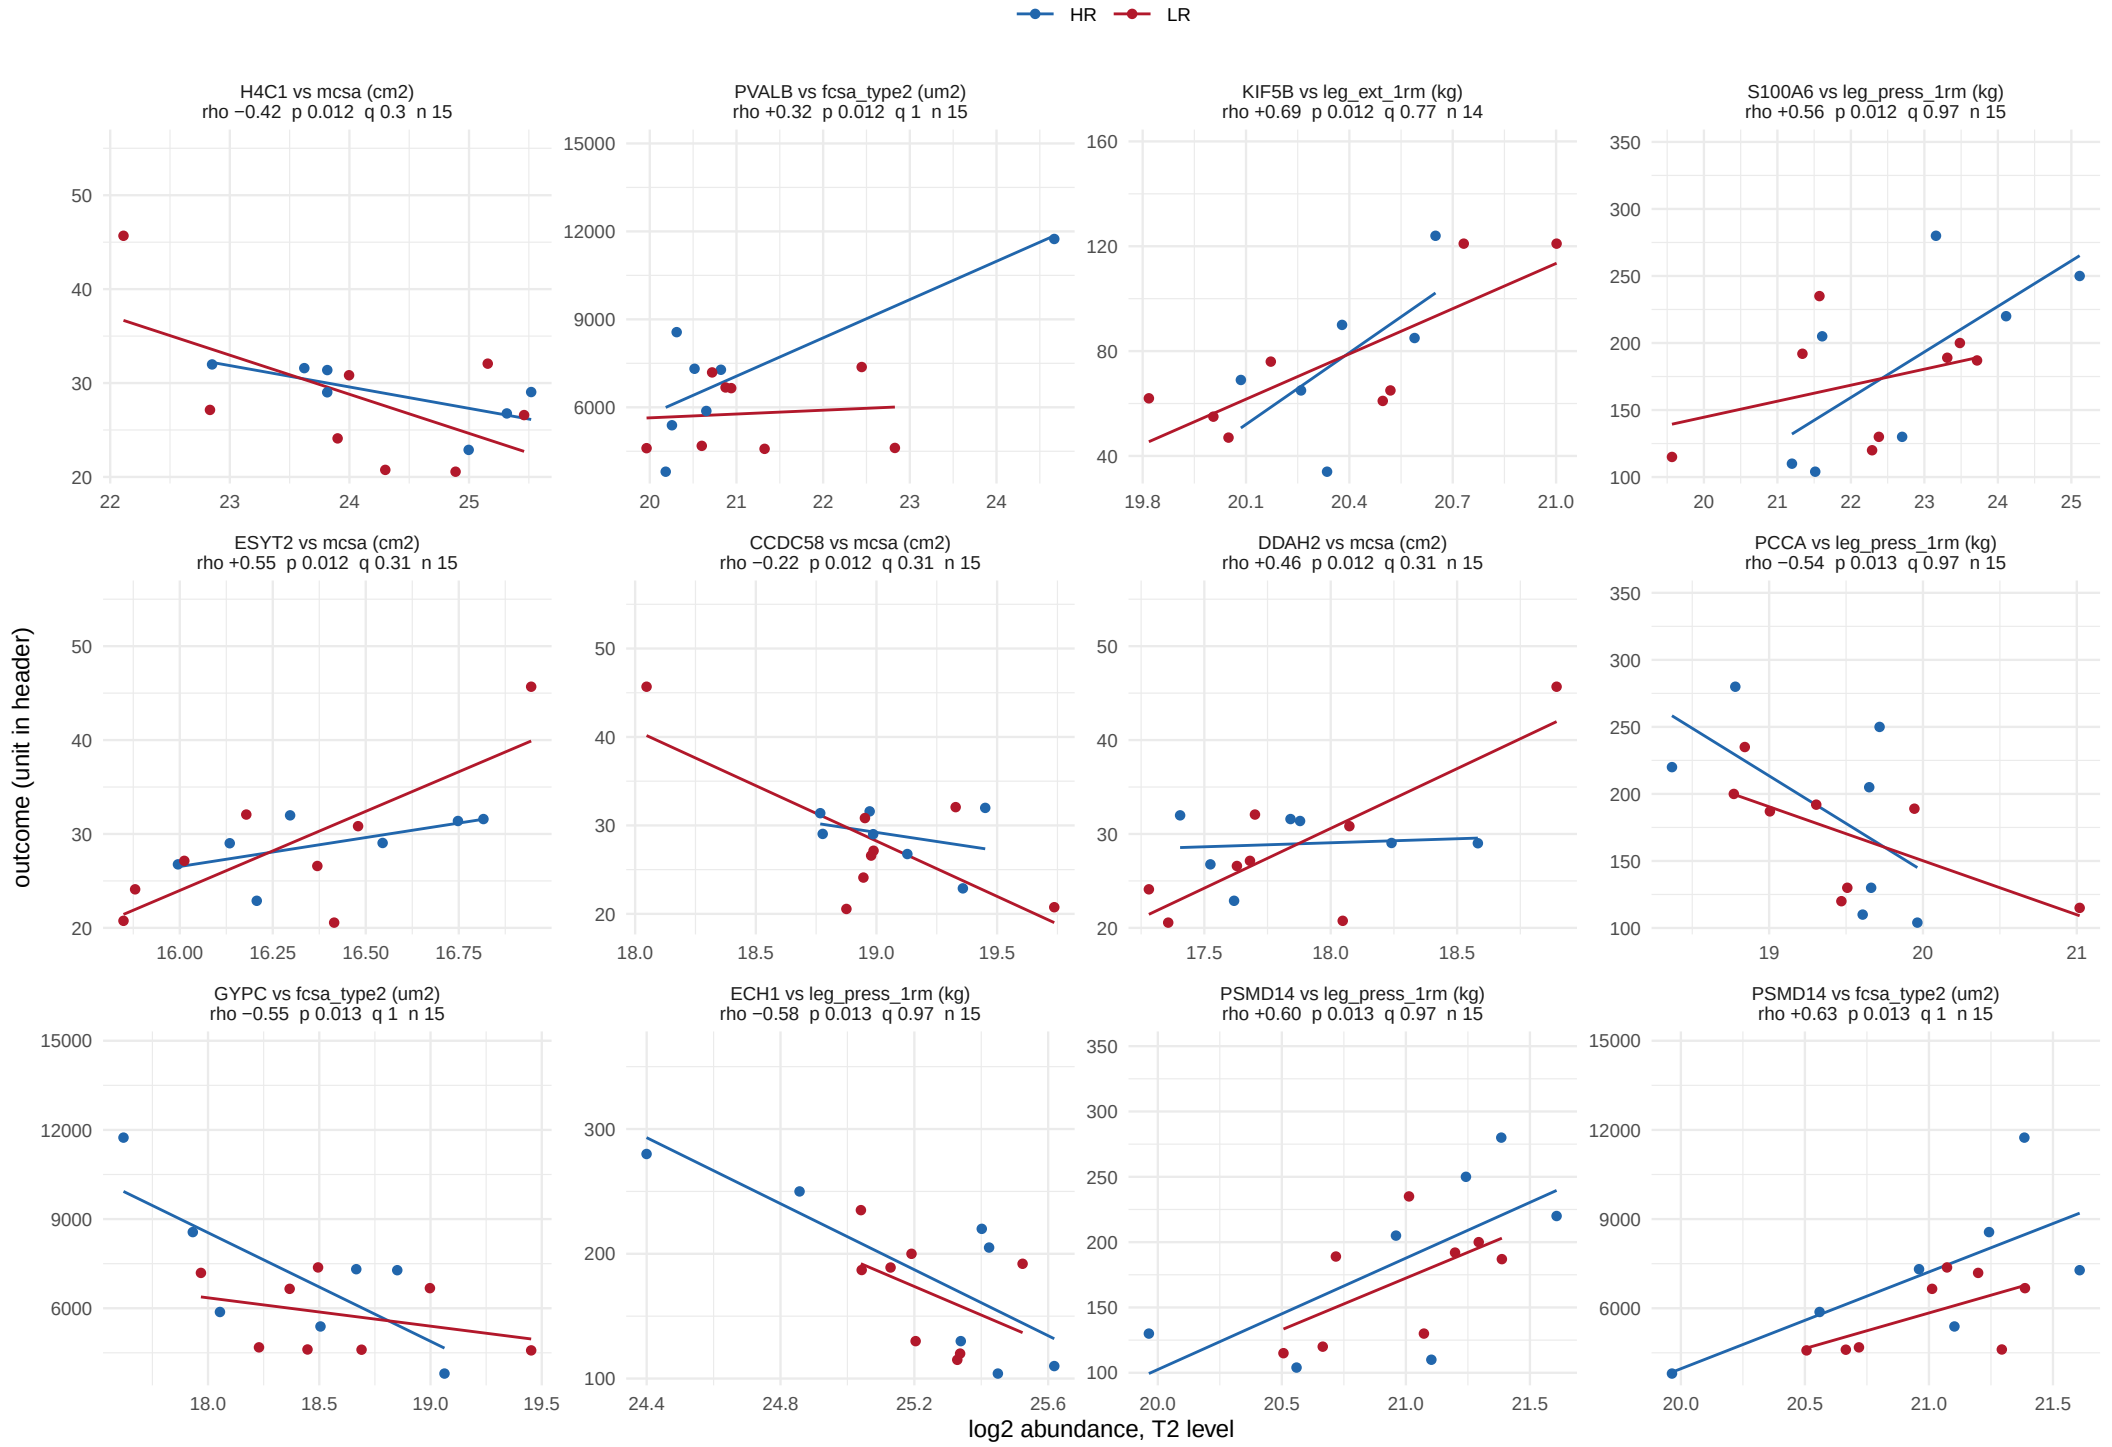

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, post_level window


534 of 11400 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 15 of 45.

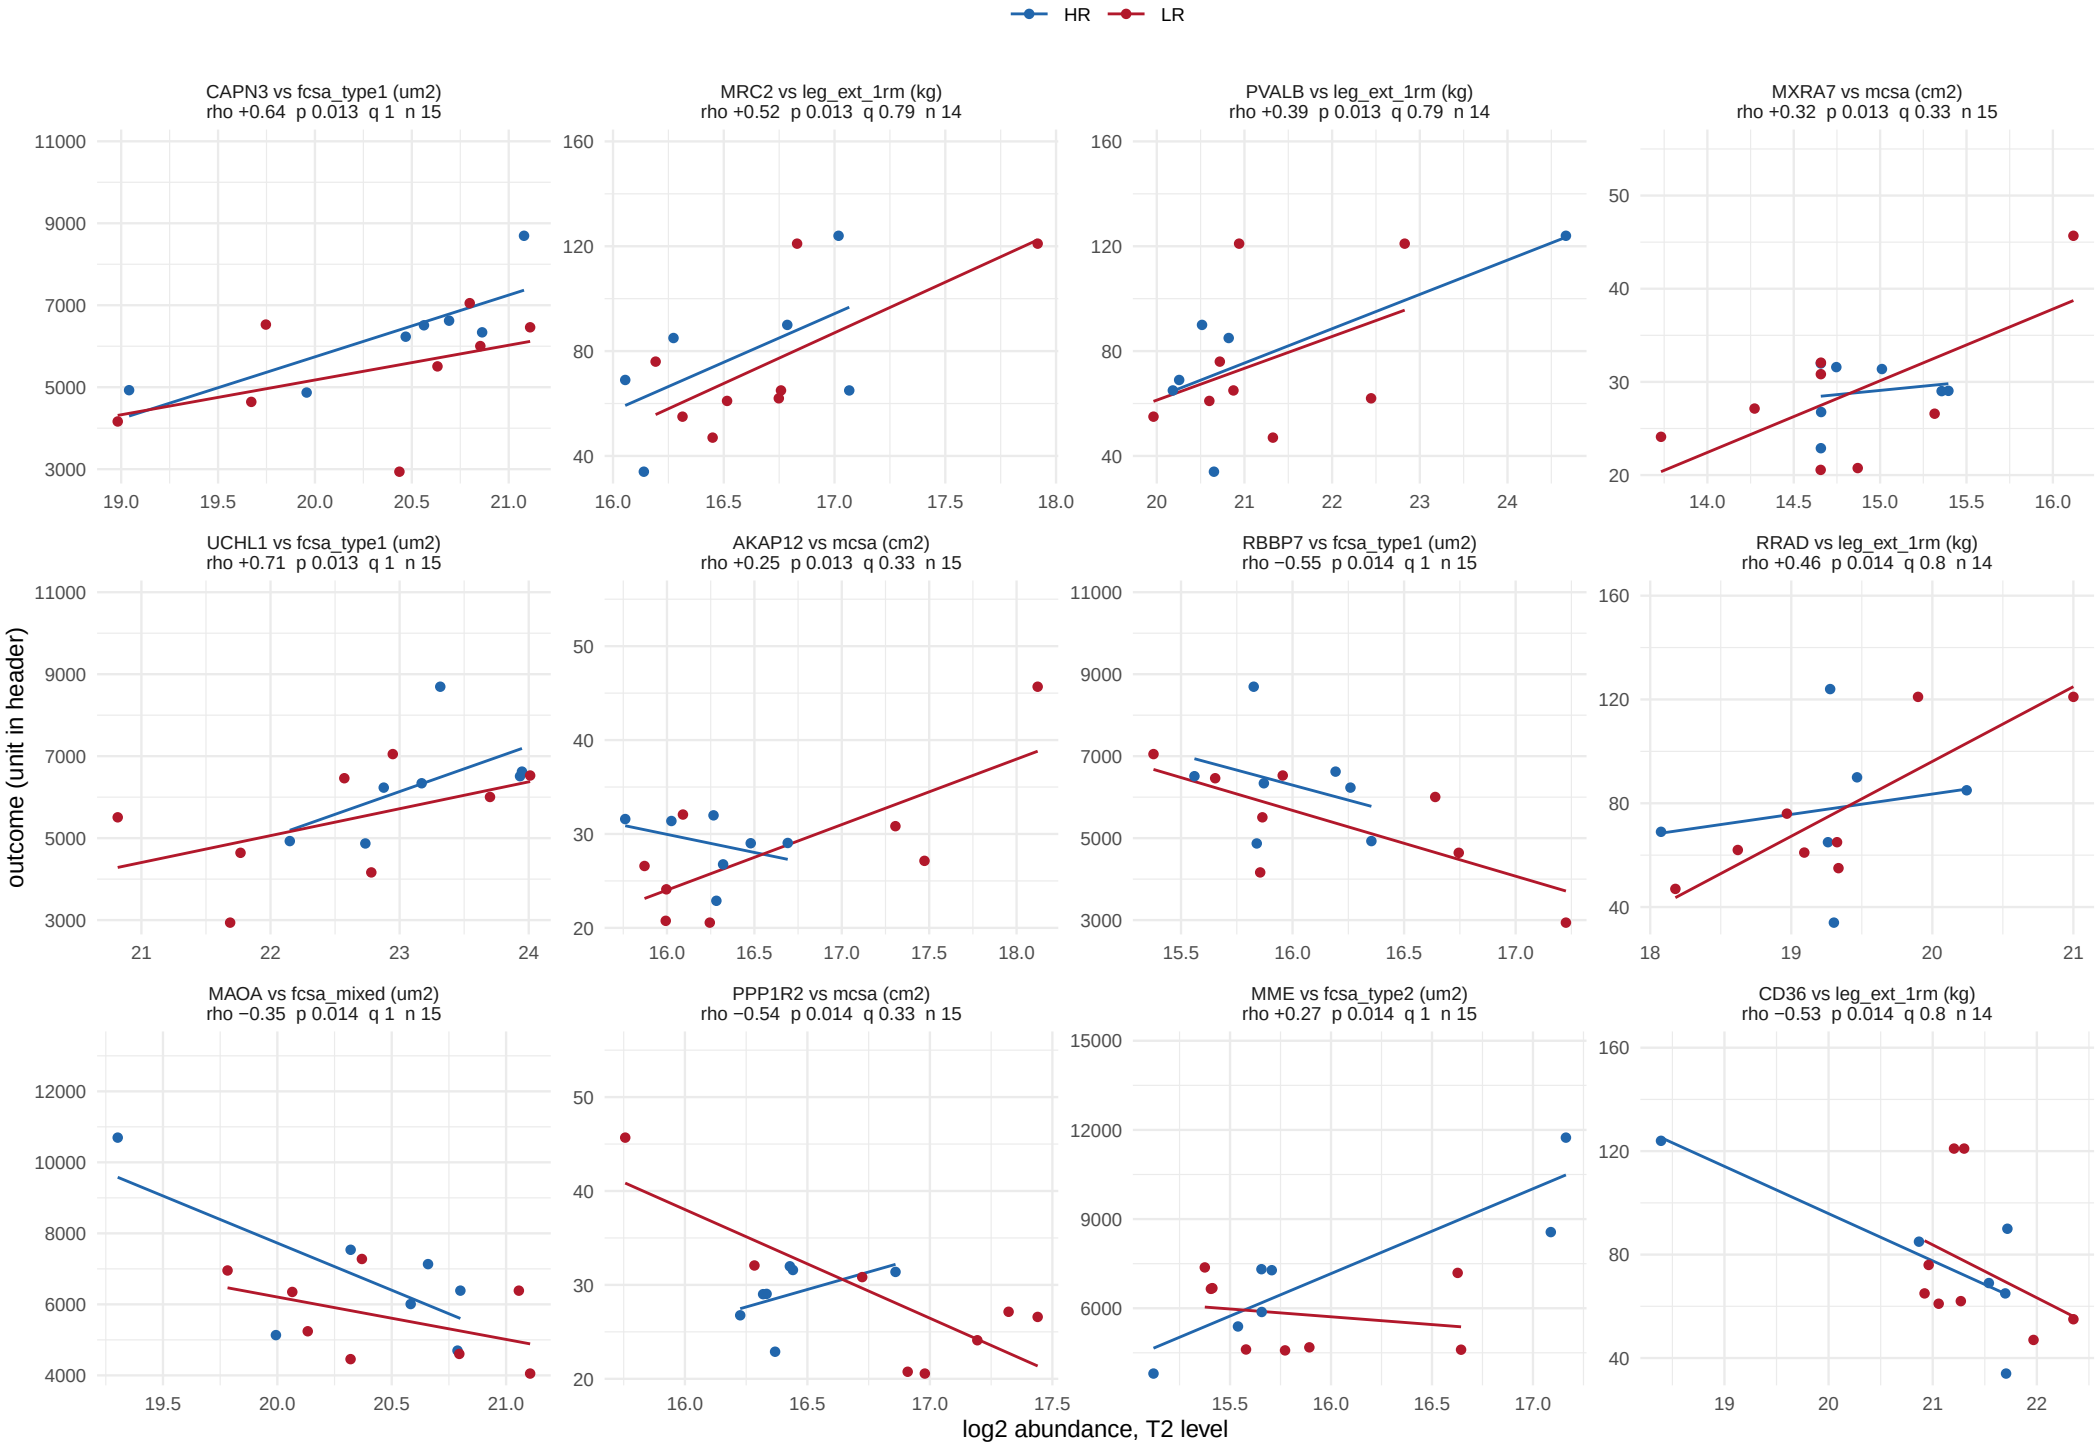

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, post_level window

534 of 11400 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 16 of 45.

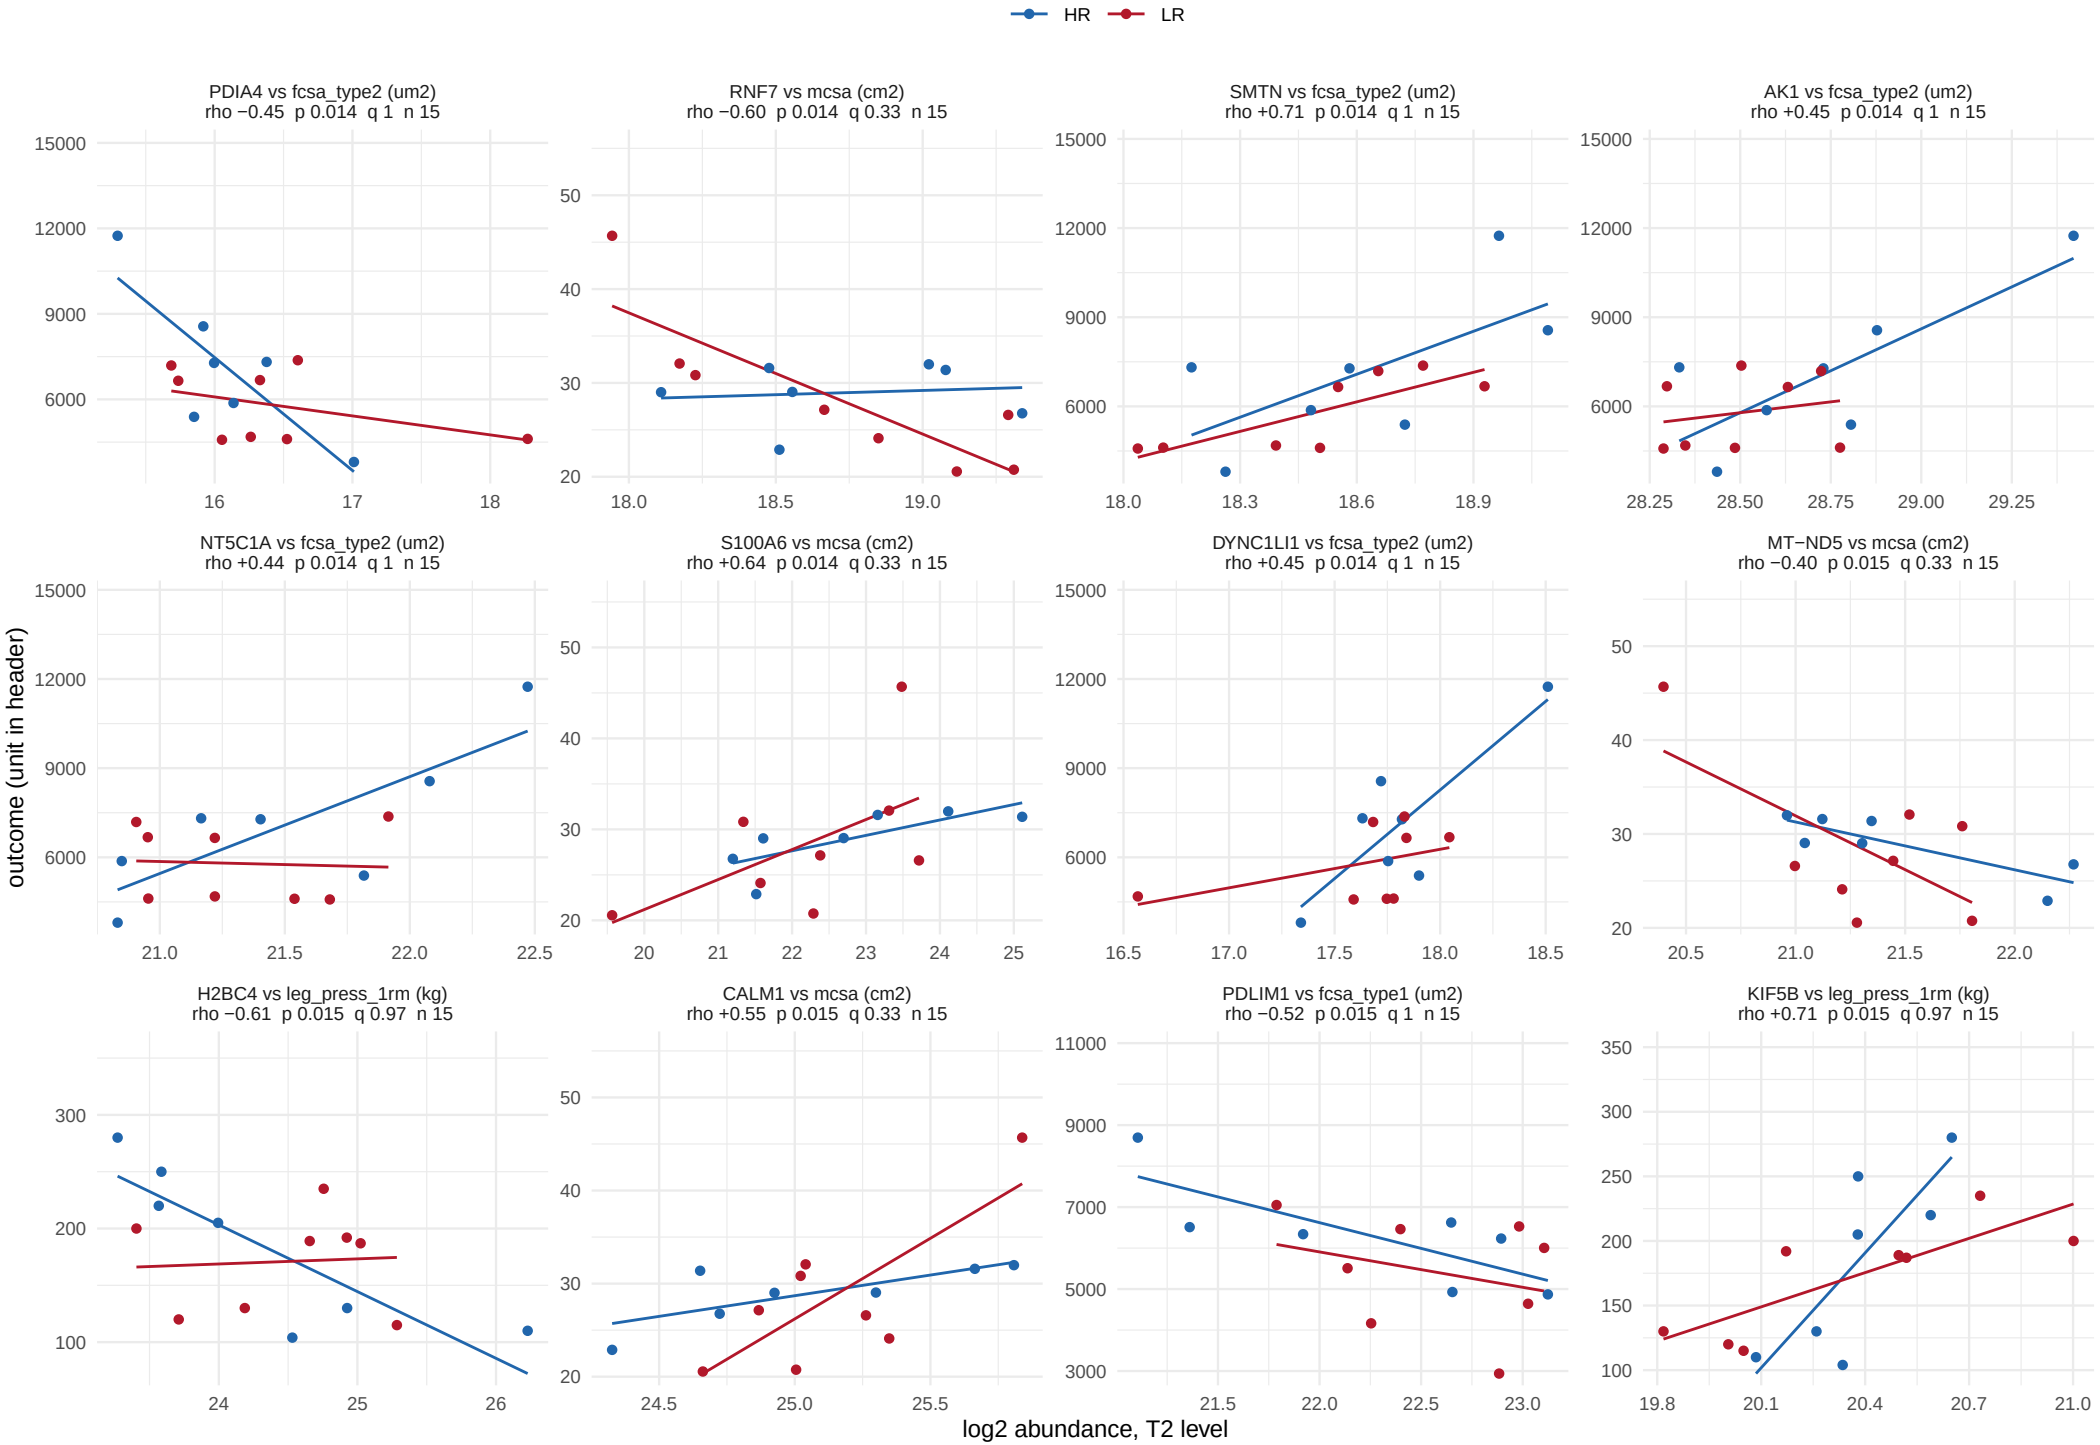

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, post_level window

534 of 11400 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 17 of 45.



One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, post_level window


534 of 11400 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 18 of 45.



One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, post_level window


534 of 11400 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 19 of 45.

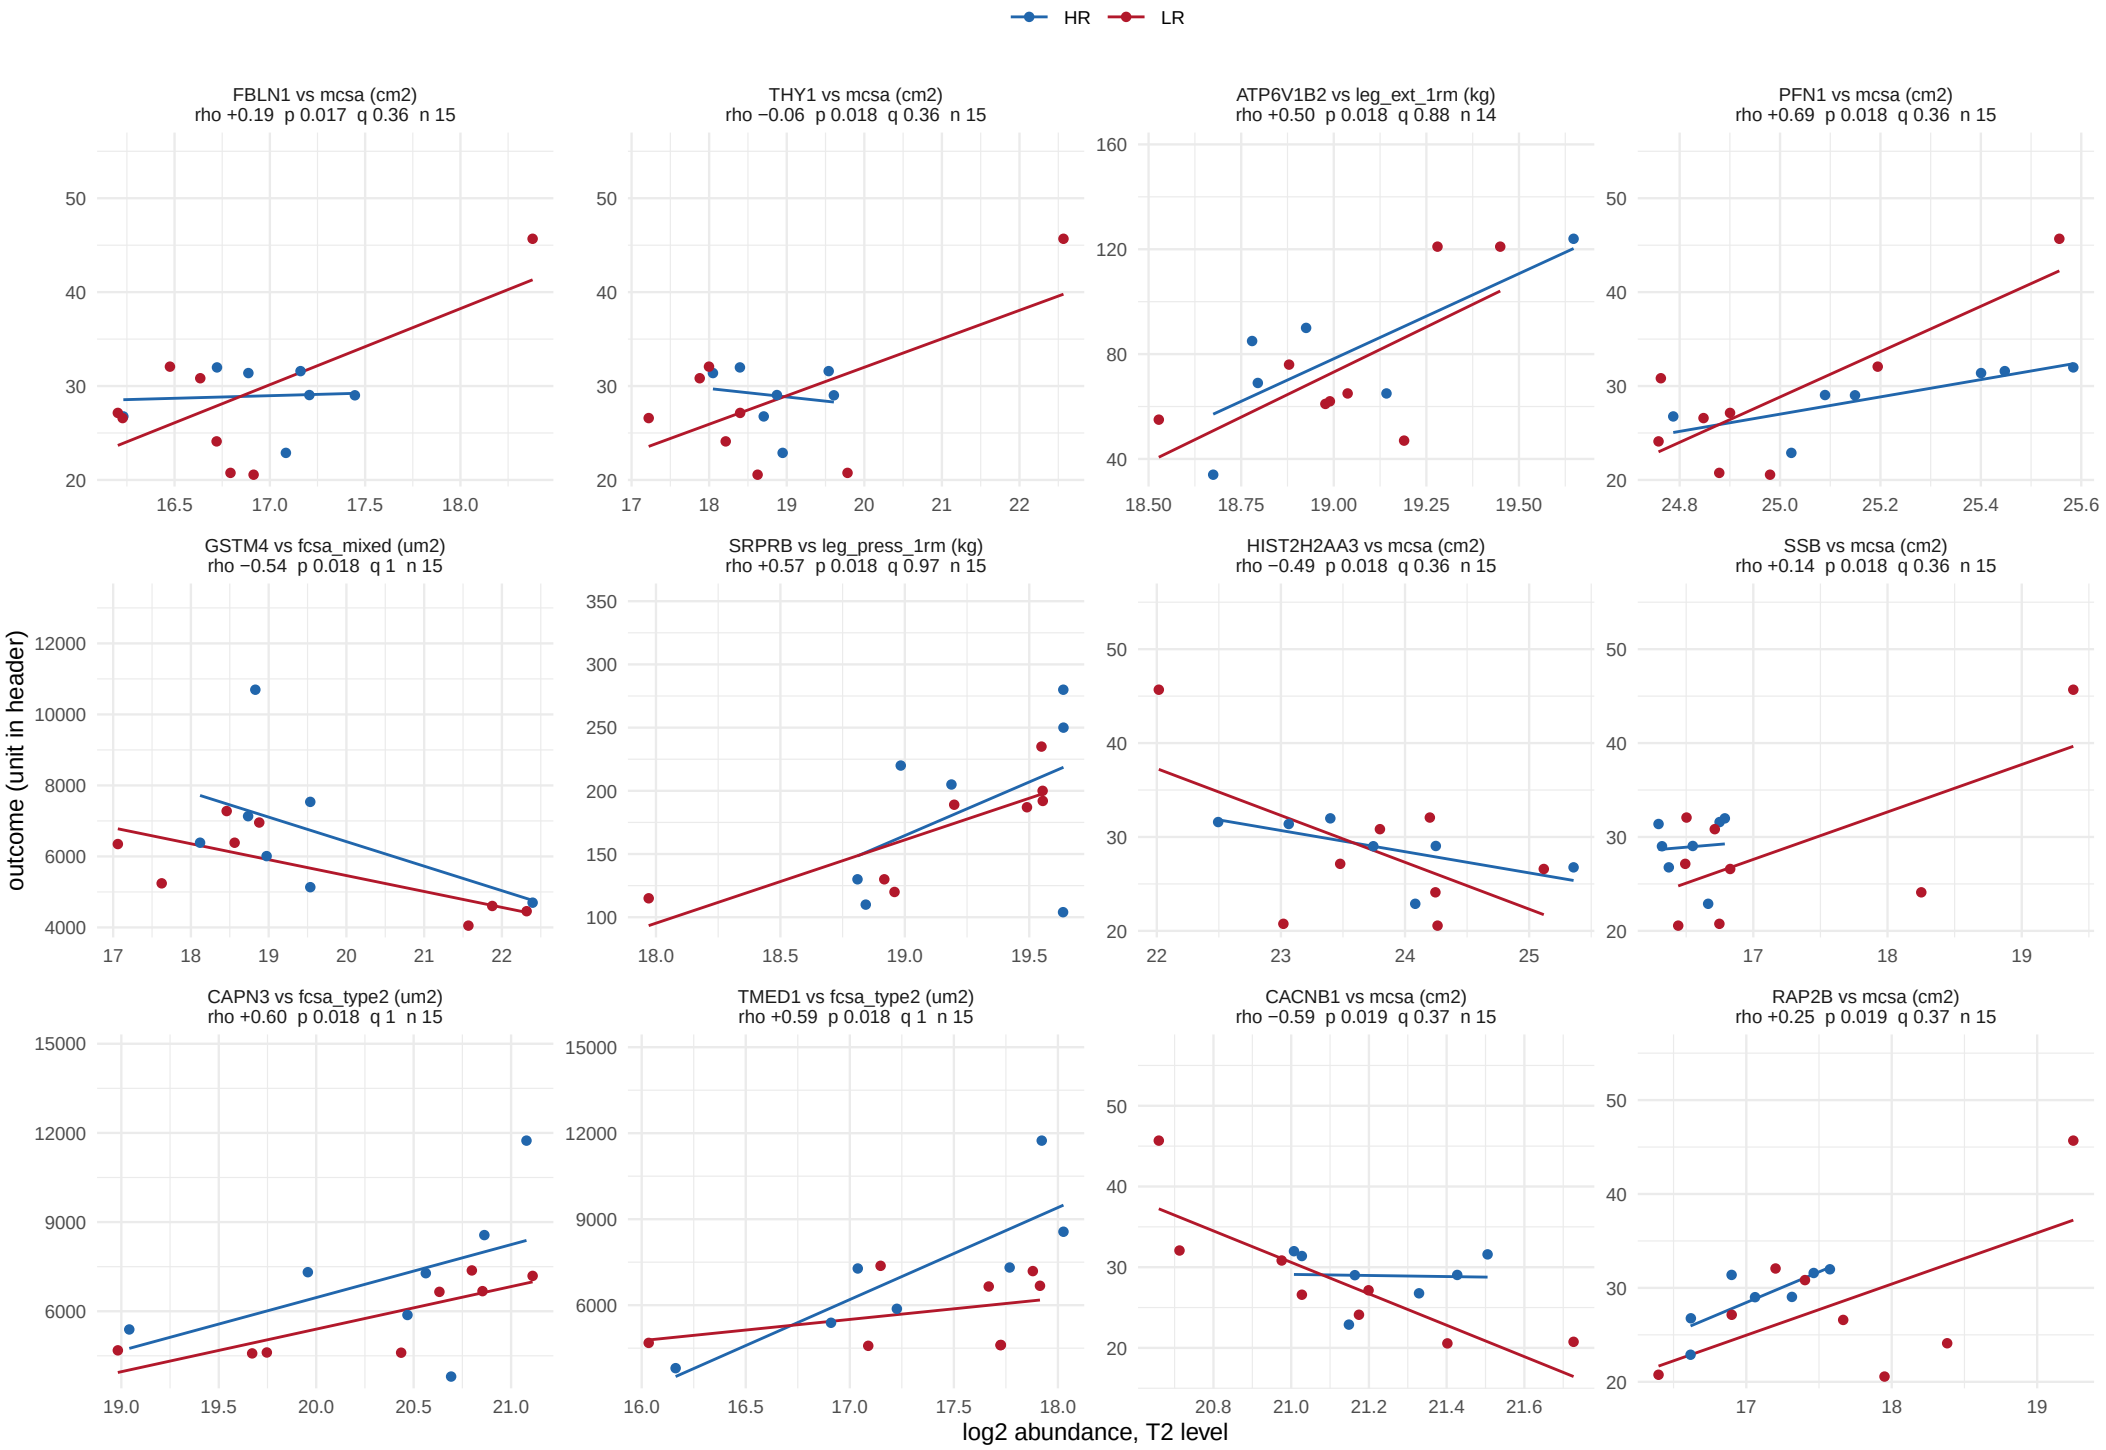

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, post_level window


534 of 11400 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 20 of 45.

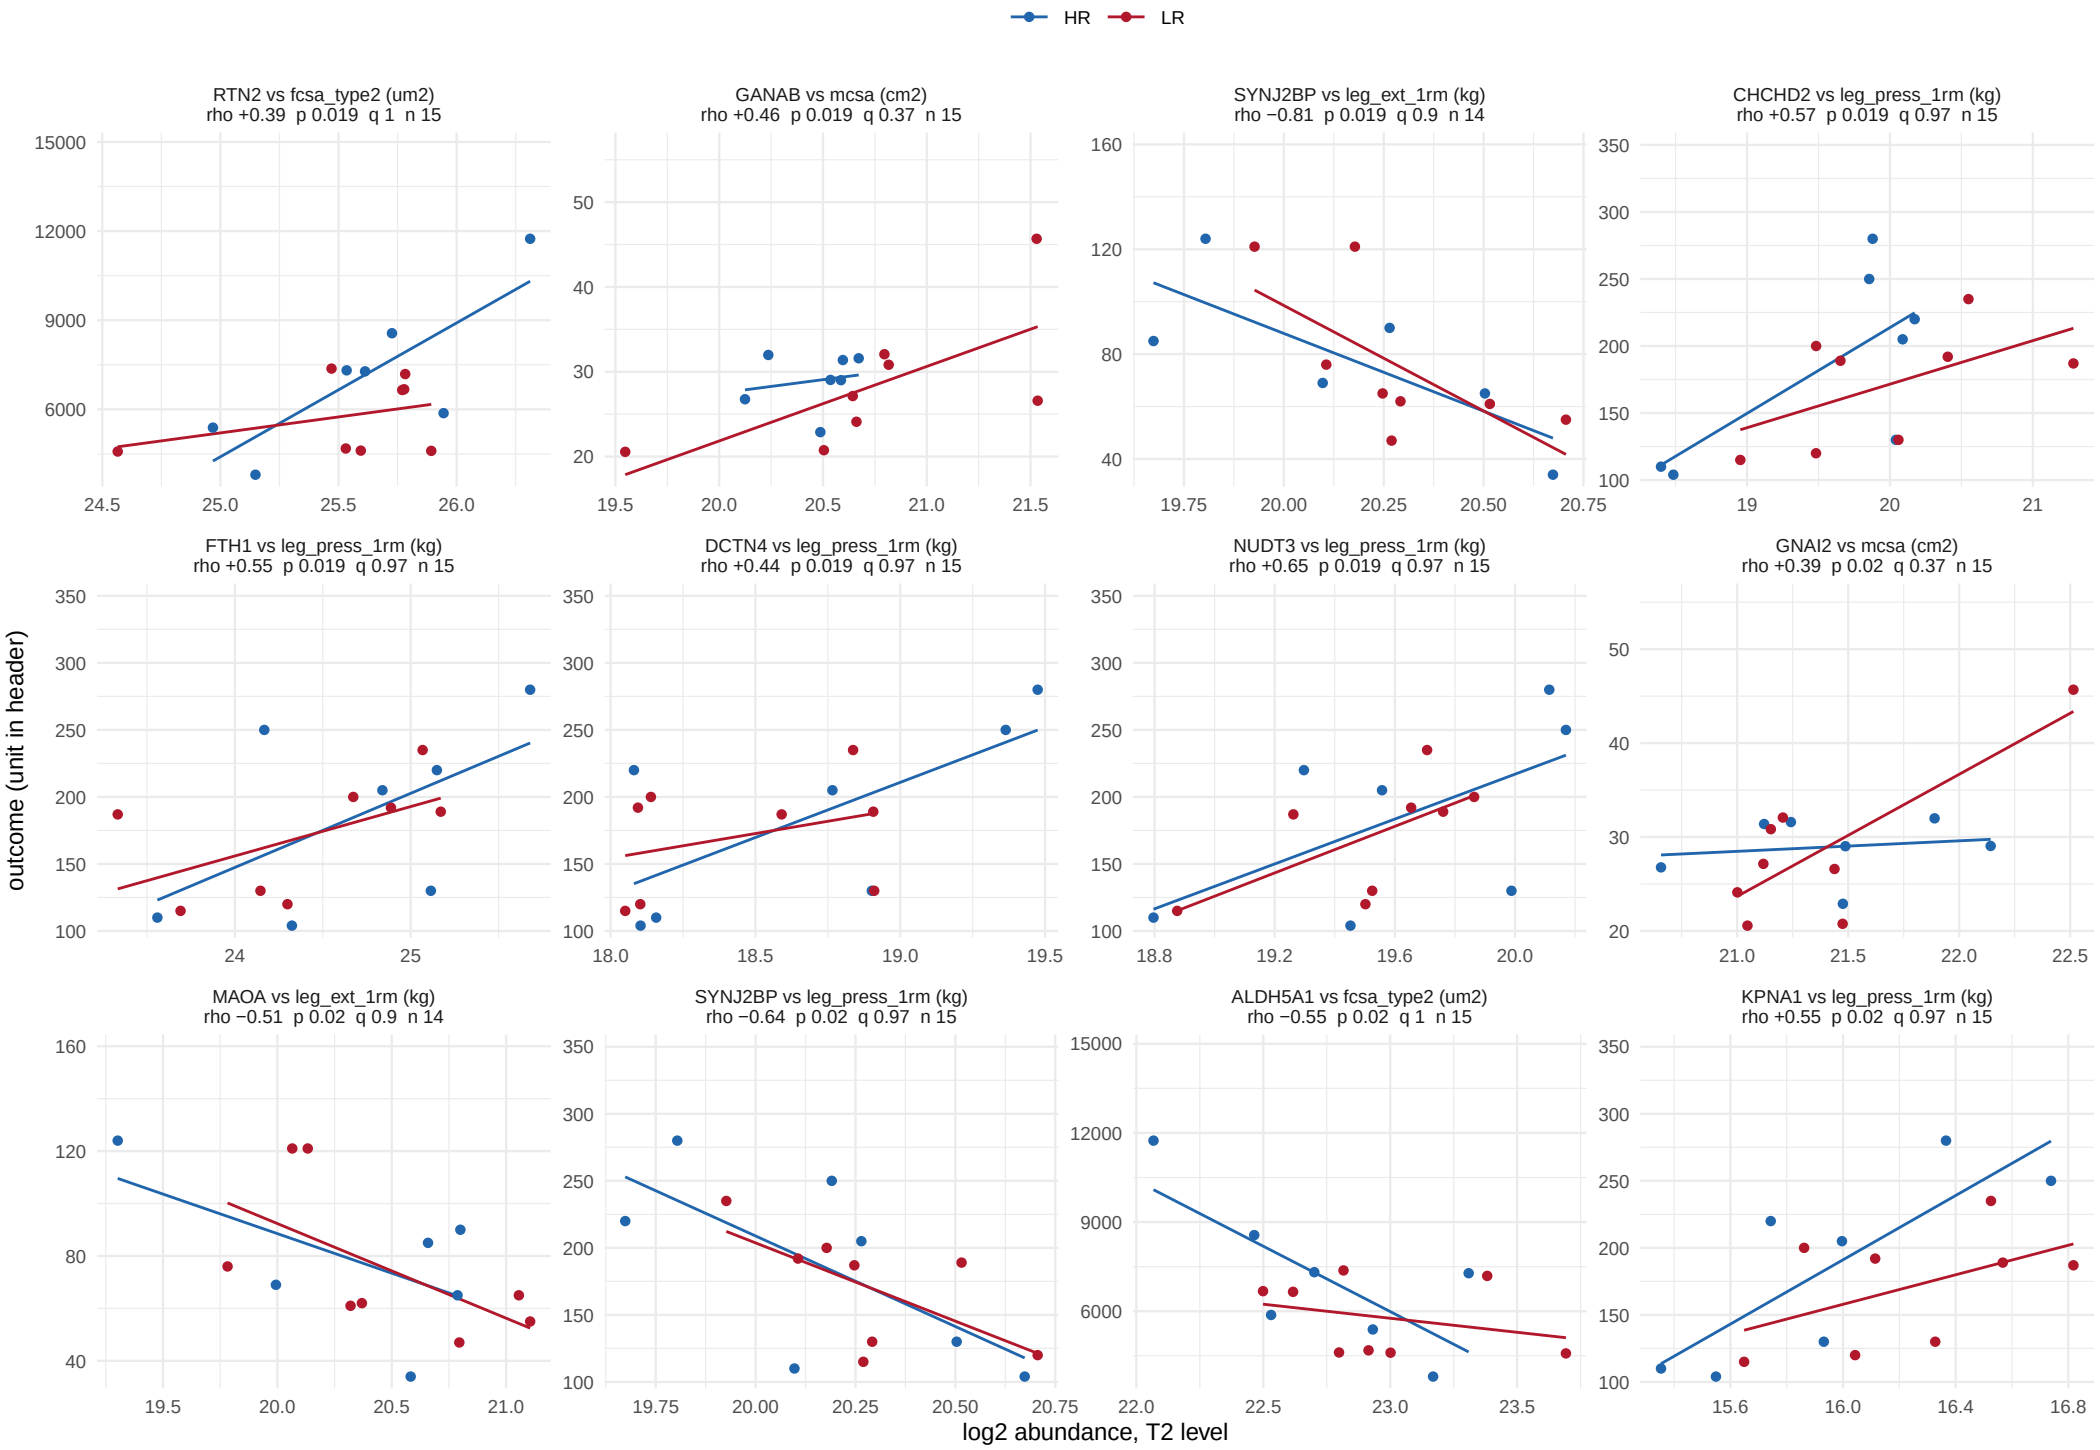

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, post_level window


534 of 11400 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 21 of 45.

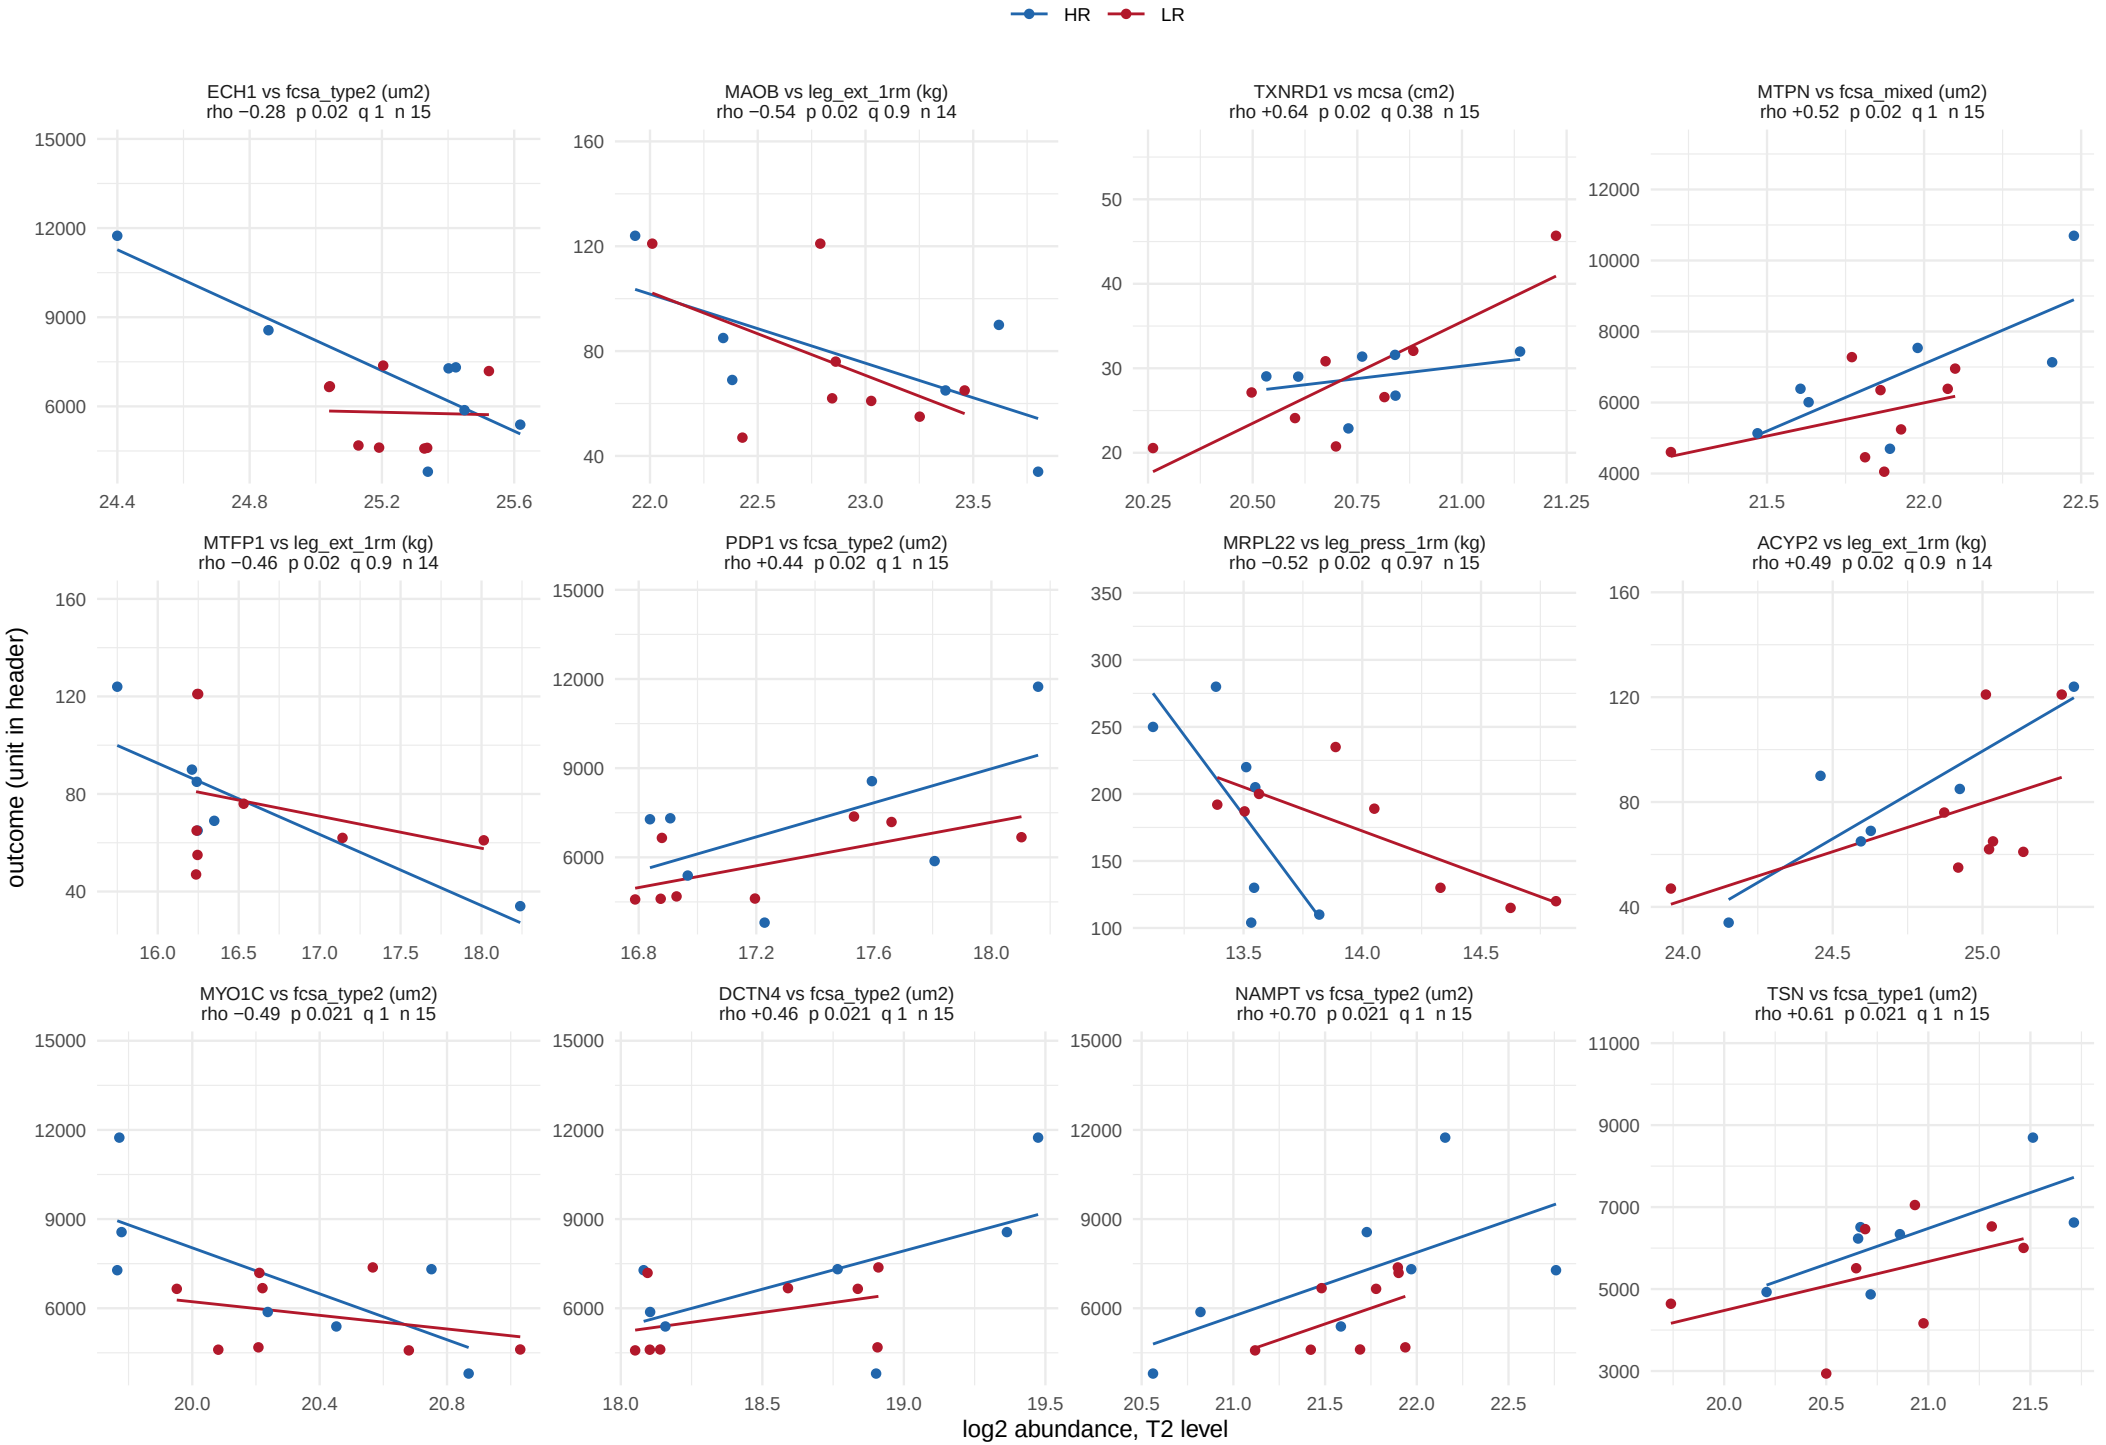

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, post_level window

534 of 11400 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 22 of 45.

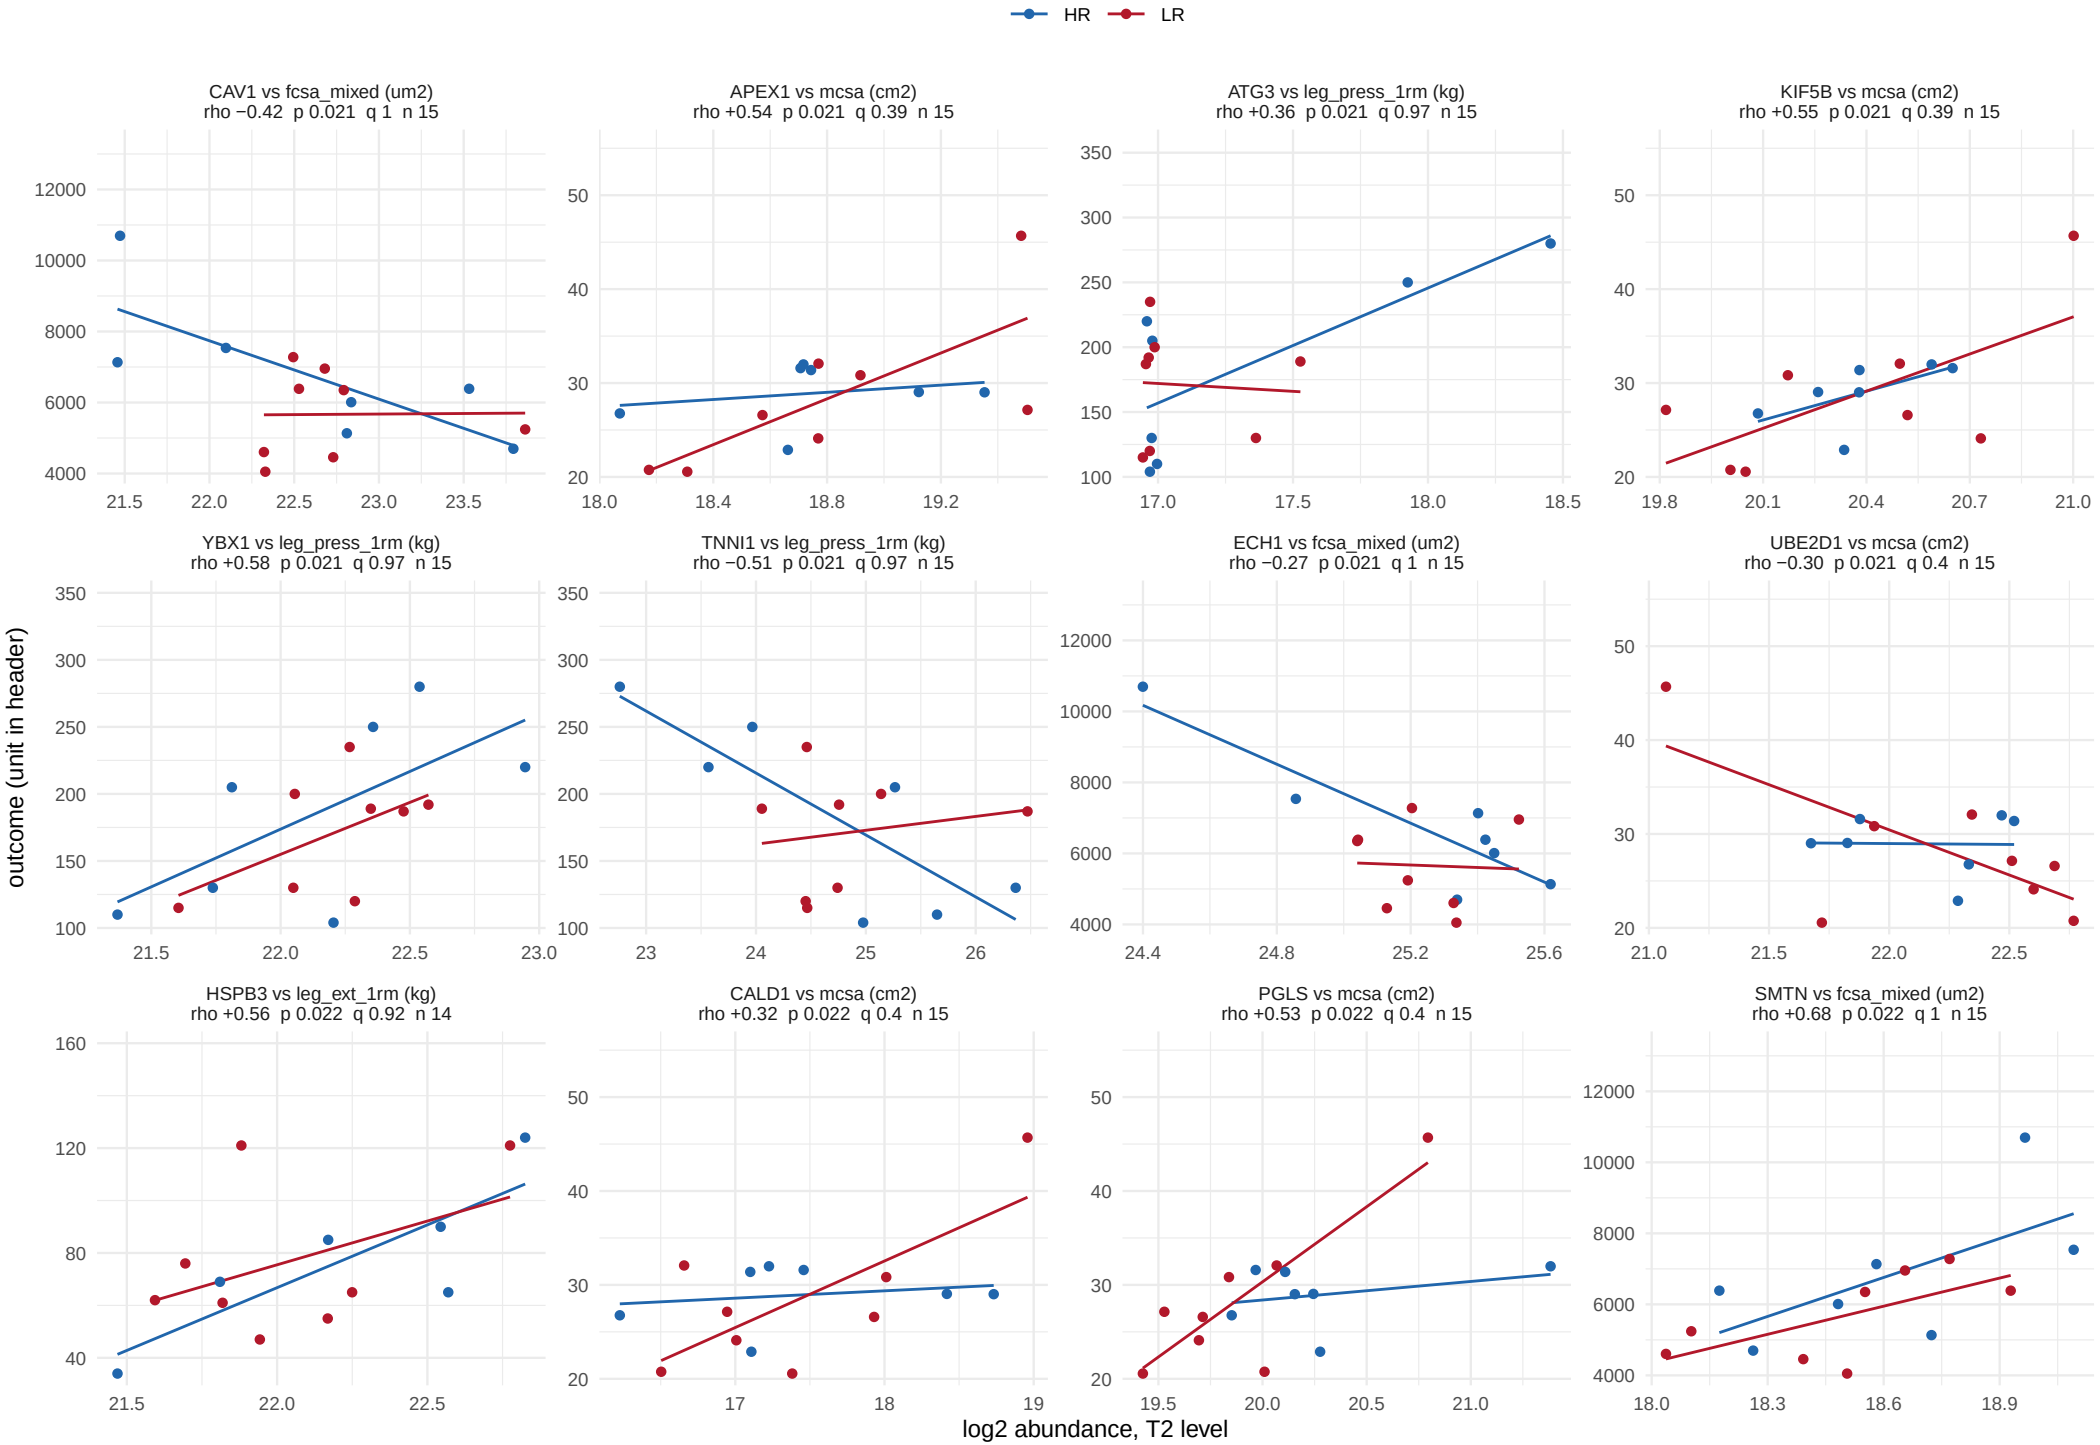

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, post_level window


534 of 11400 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 23 of 45.



One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, post_level window


534 of 11400 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 24 of 45.

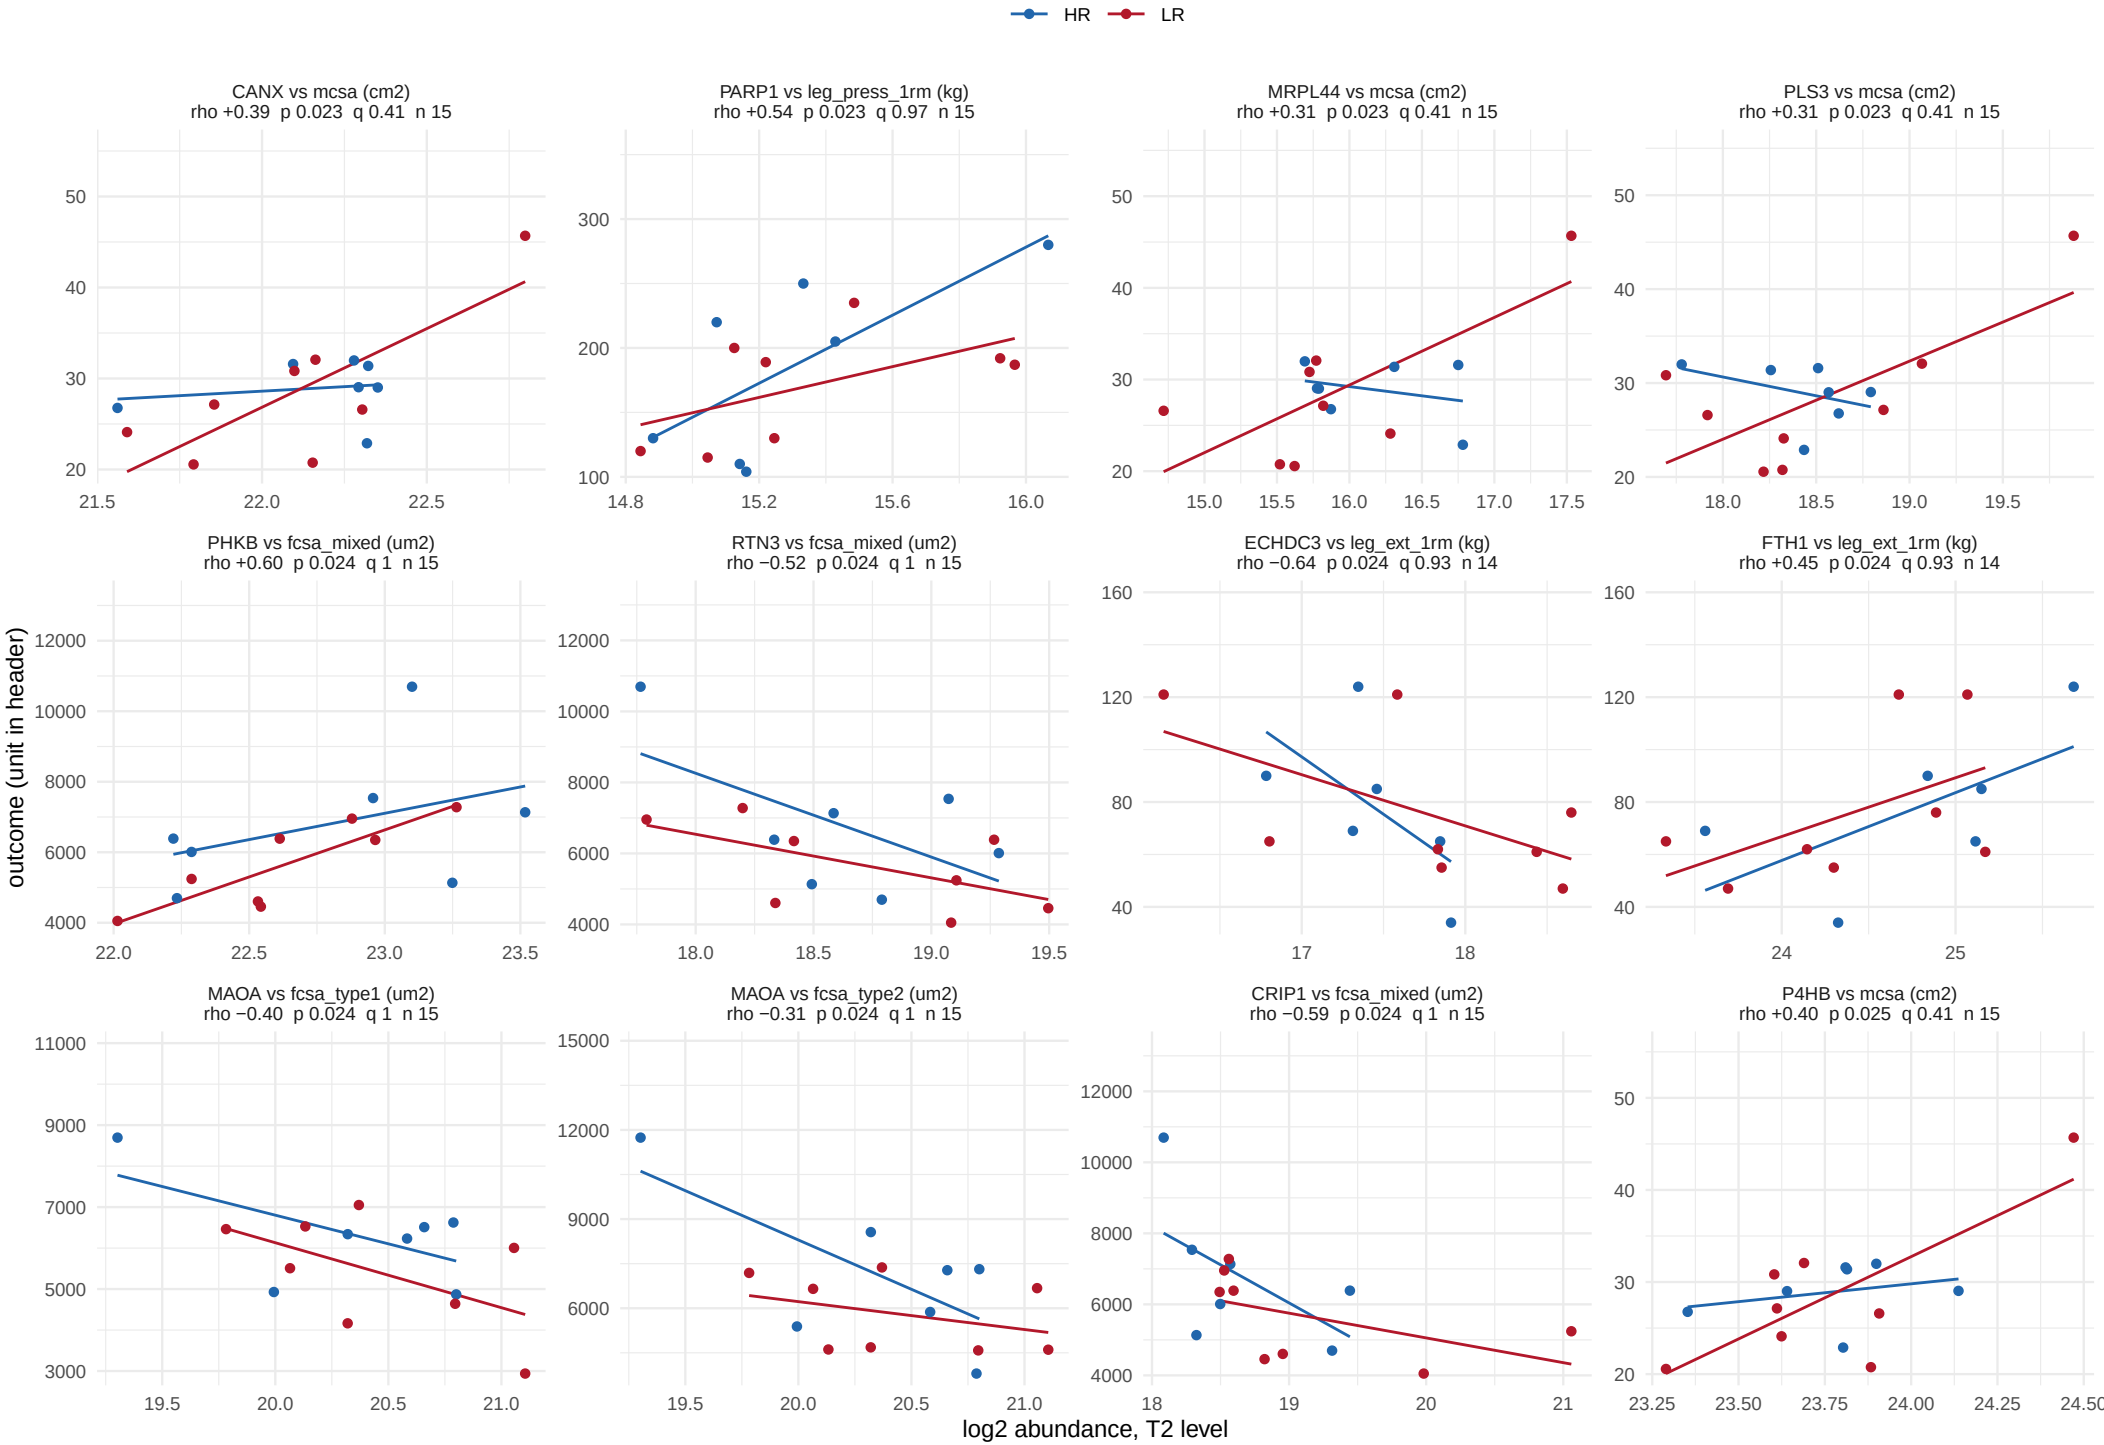

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, post_level window


534 of 11400 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 25 of 45.

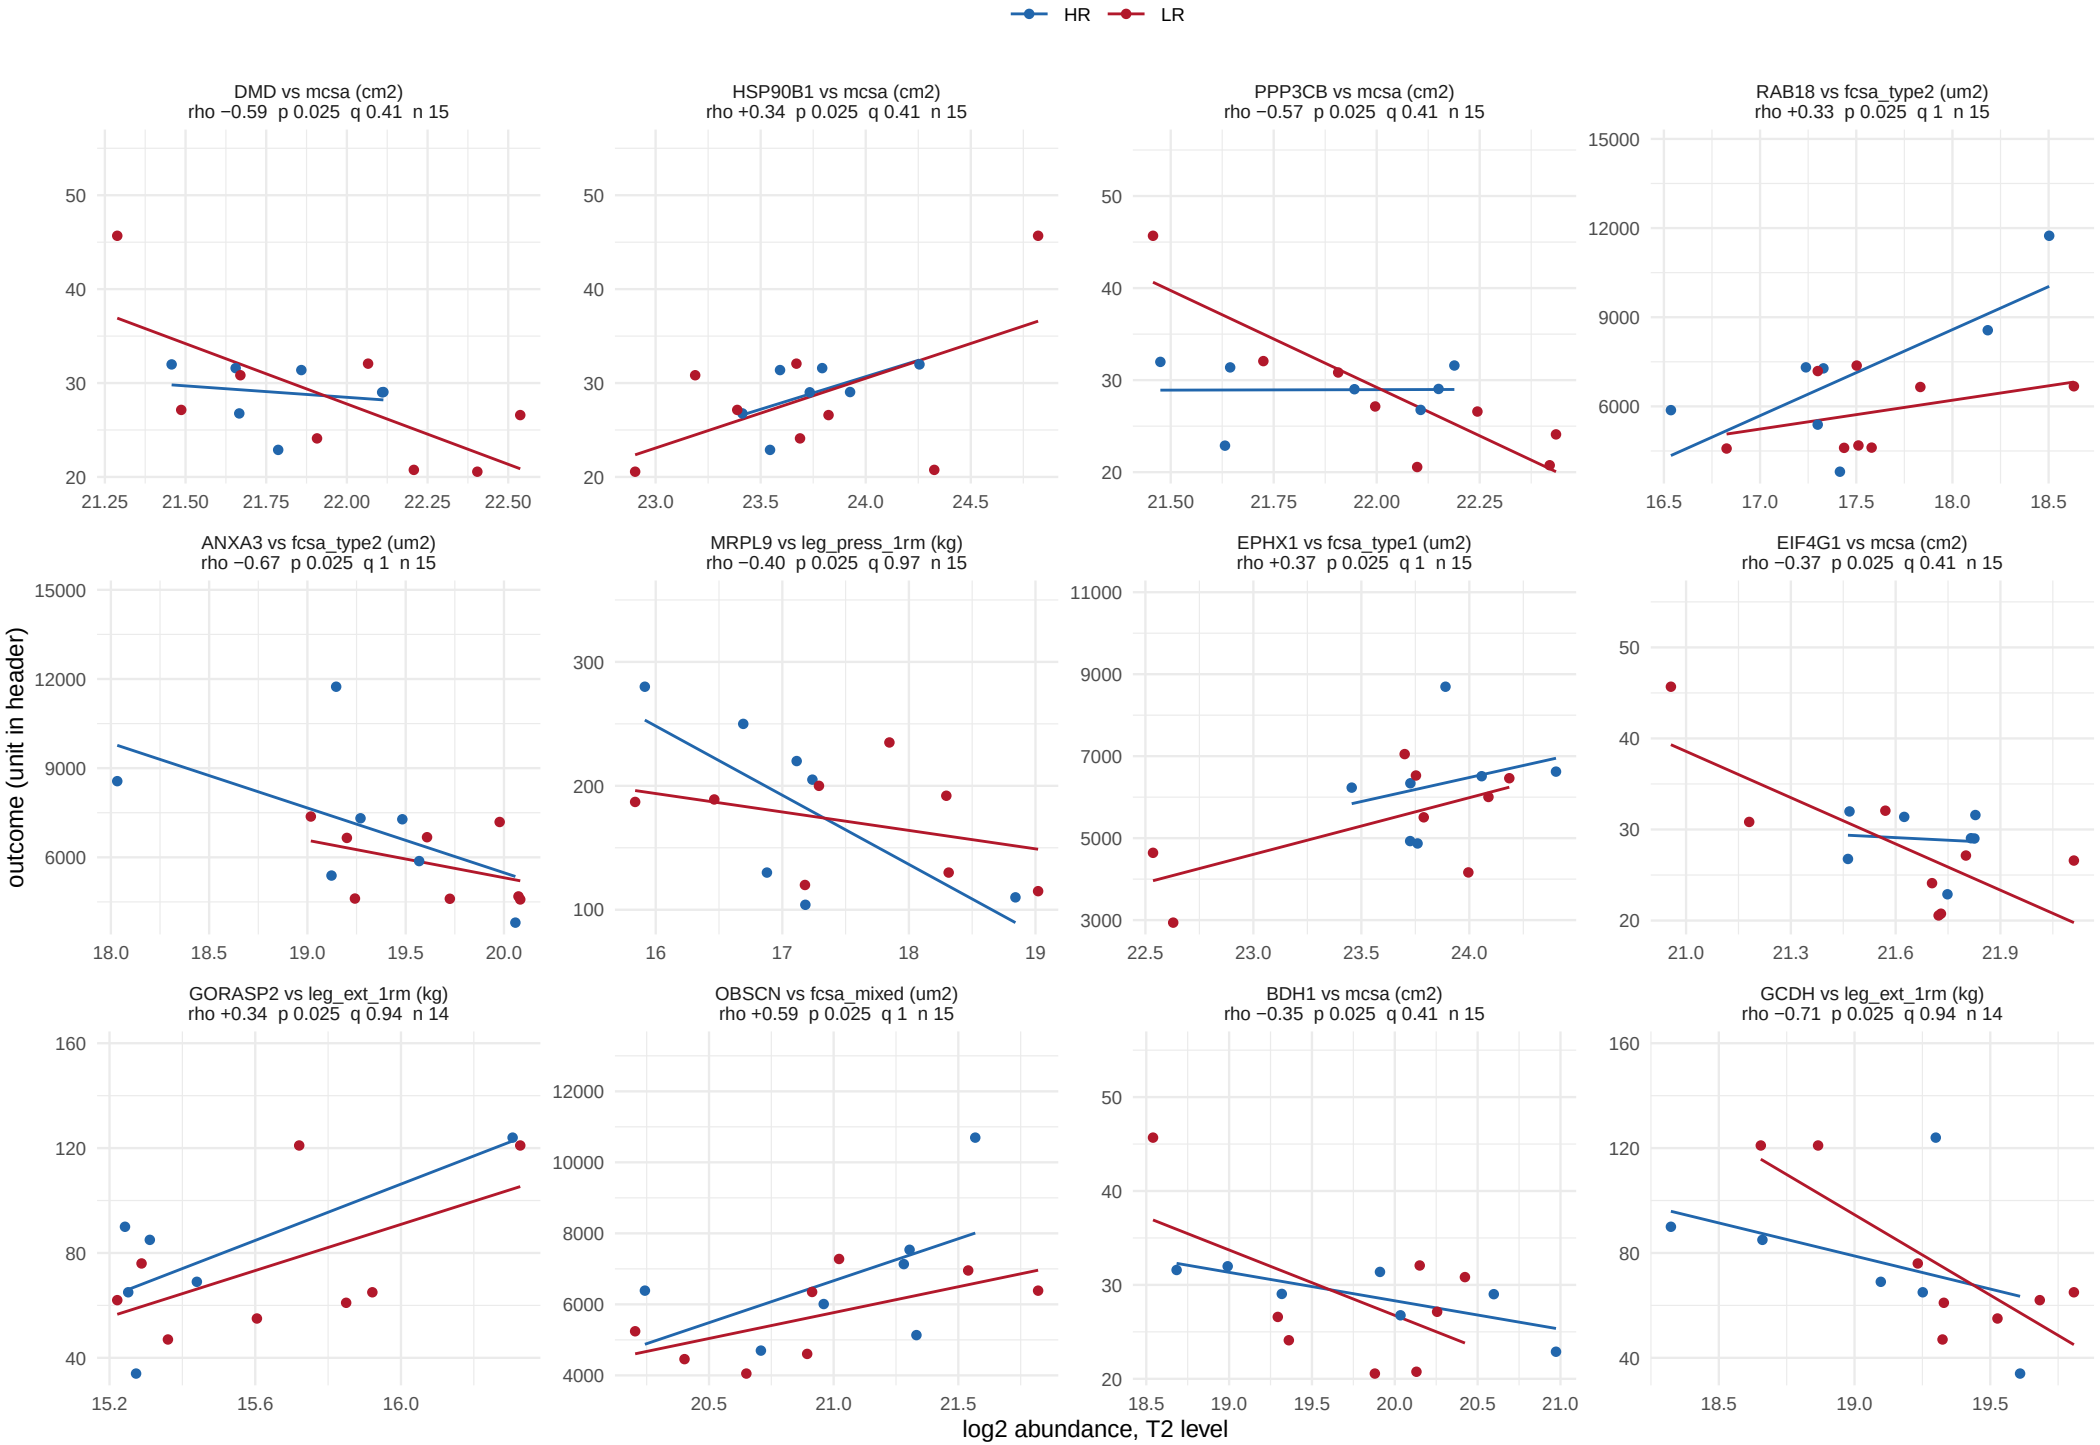

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, post_level window

534 of 11400 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 26 of 45.

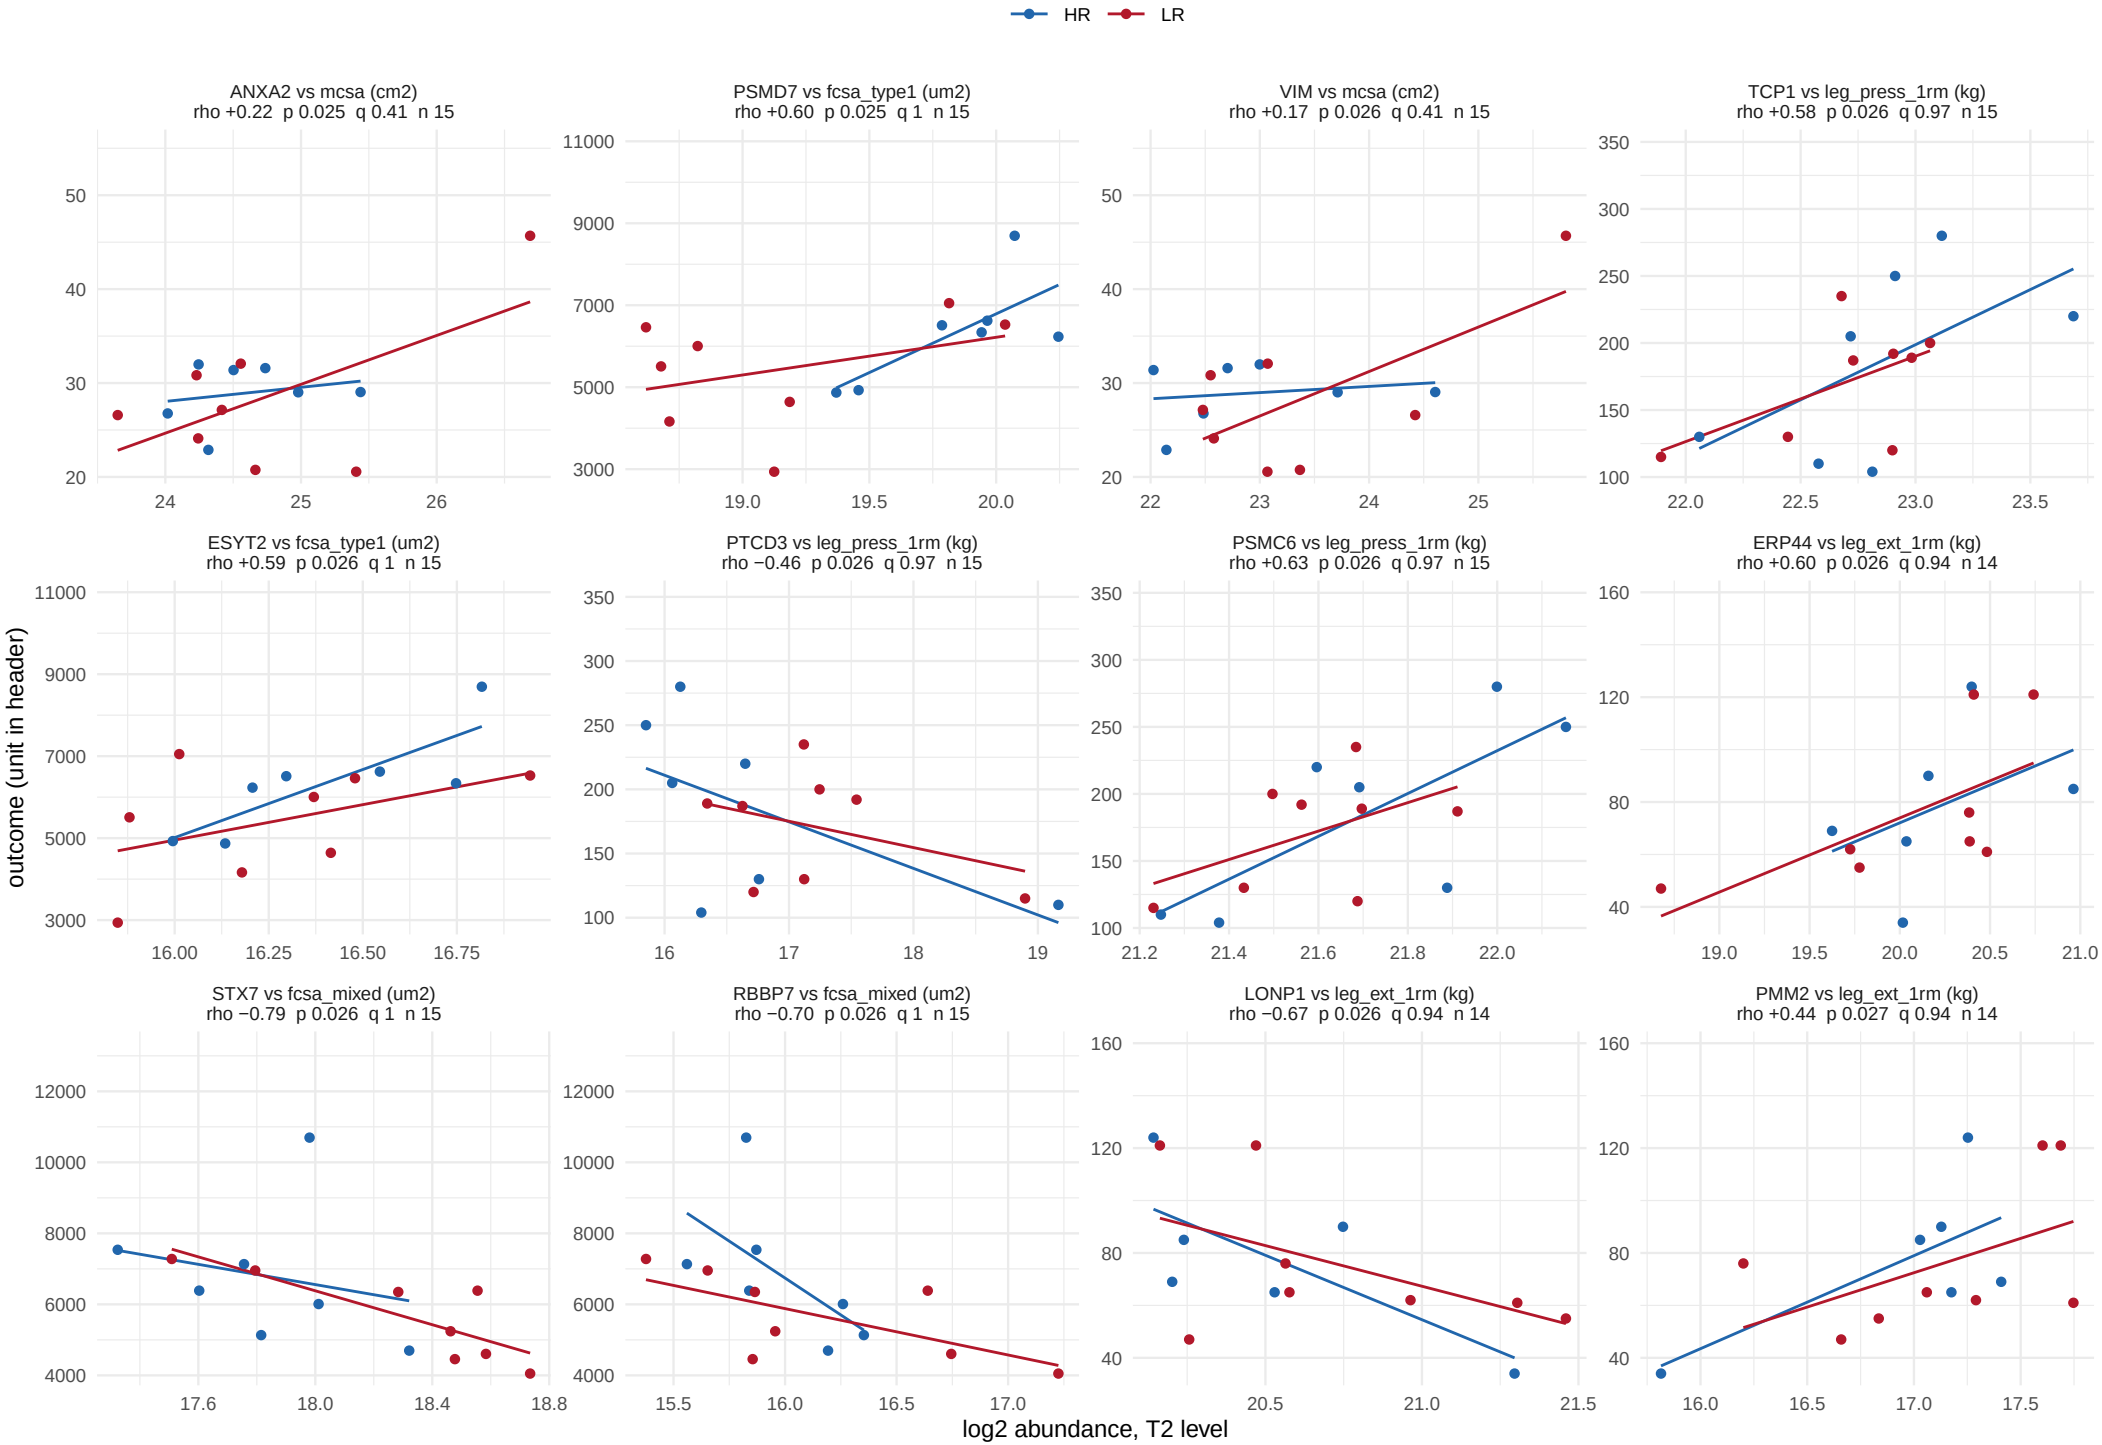

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, post_level window

534 of 11400 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 27 of 45.



One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, post_level window


534 of 11400 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 28 of 45.



One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, post_level window


534 of 11400 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 29 of 45.

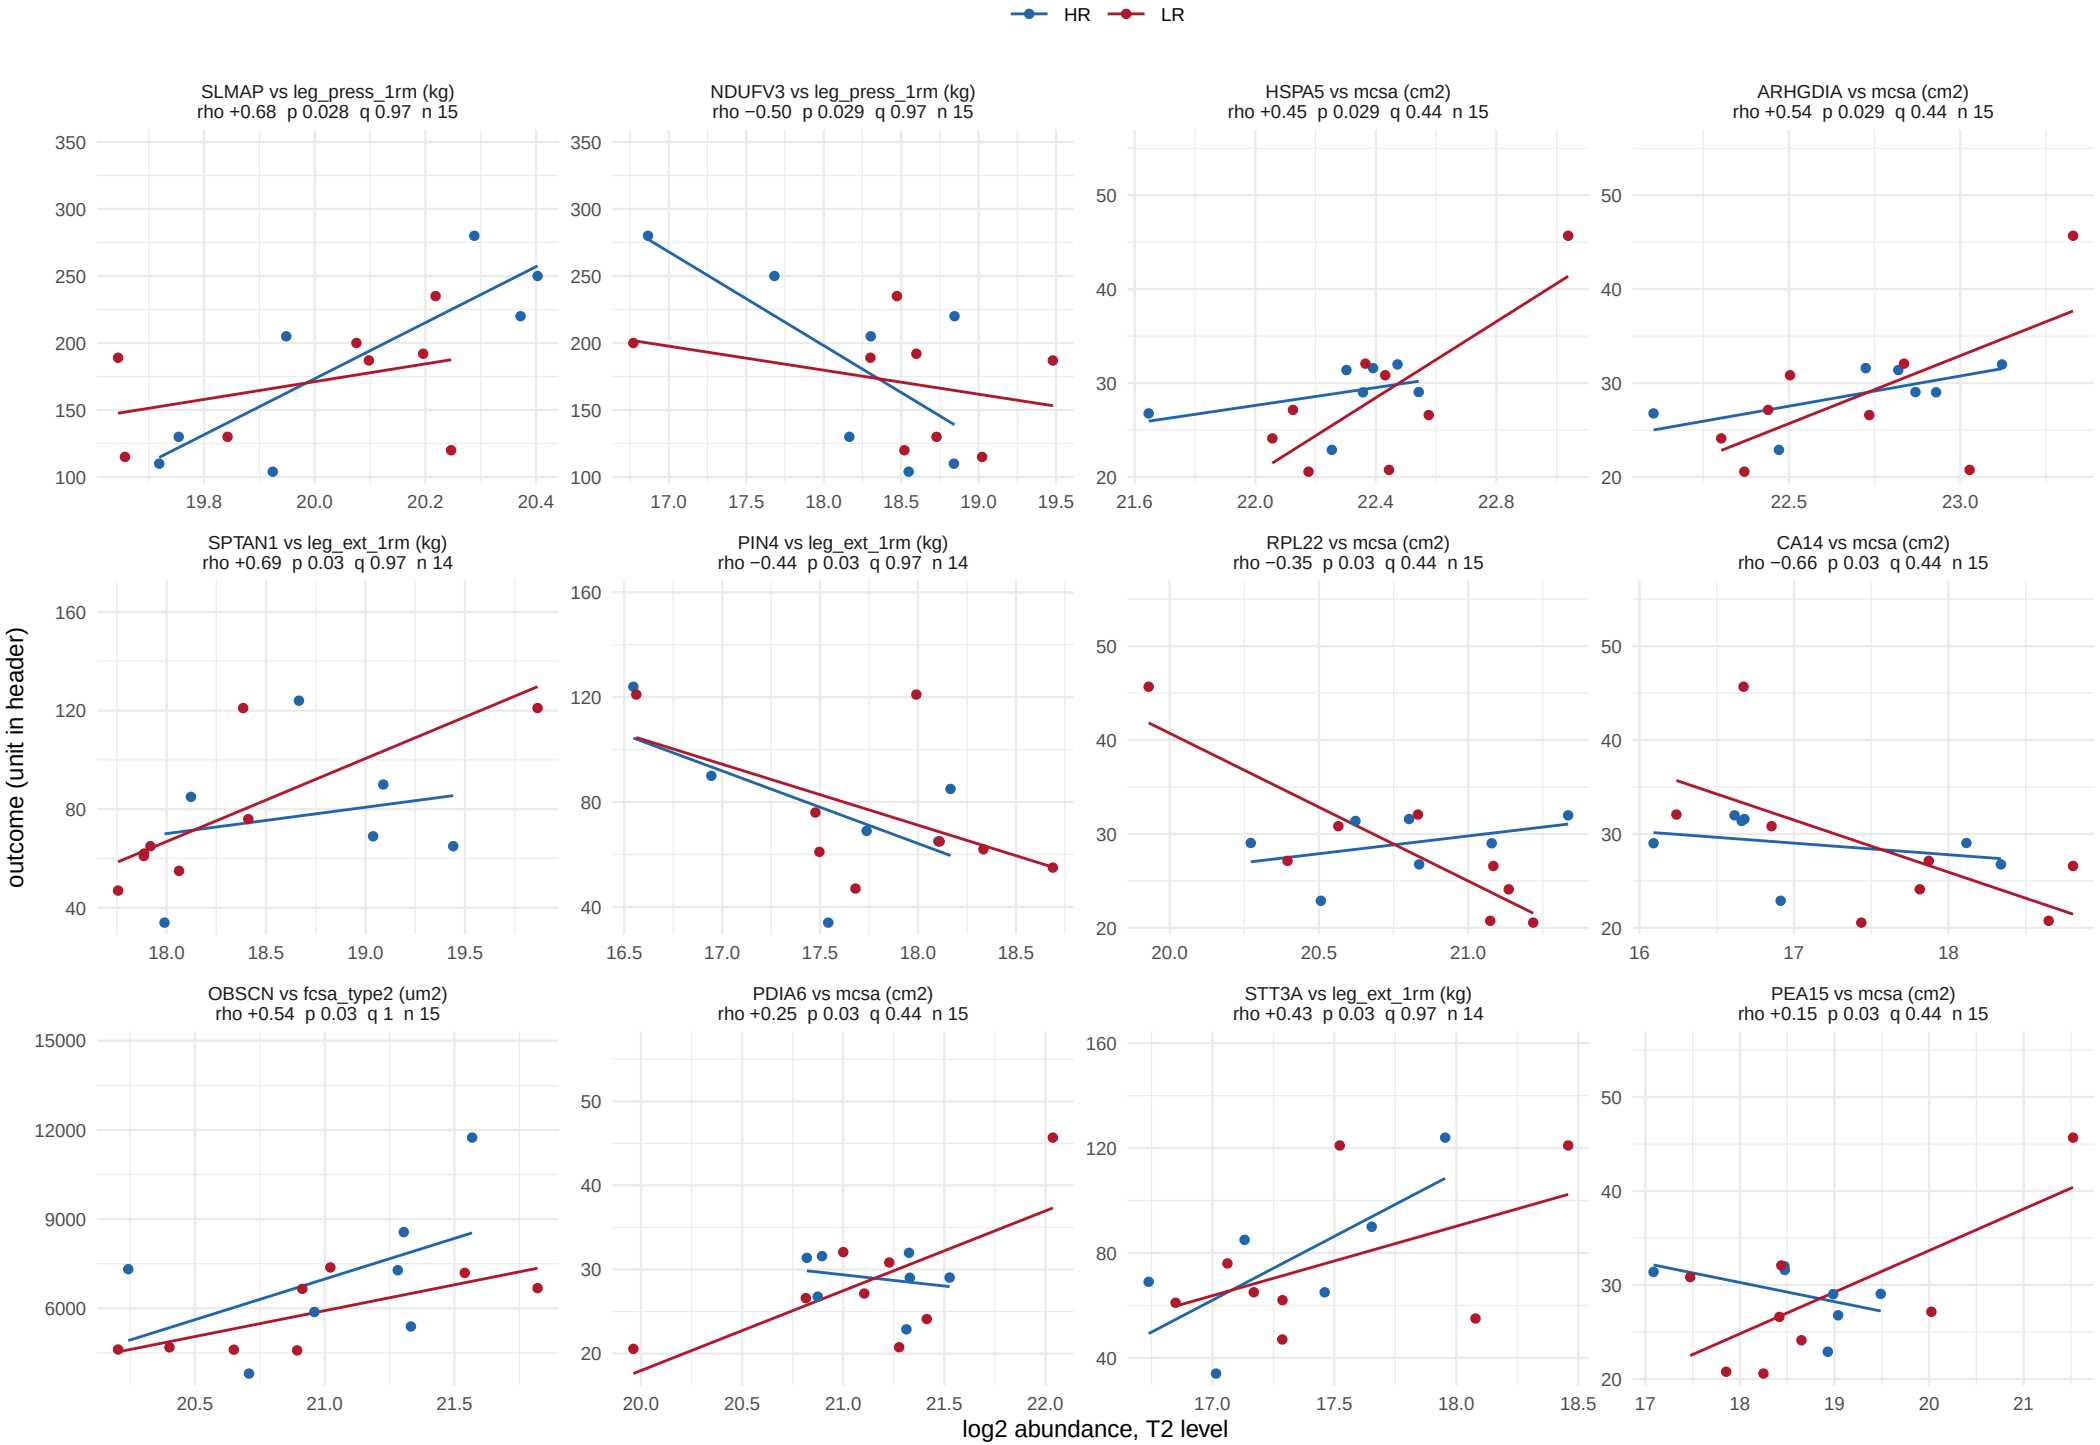

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, post_level window


534 of 11400 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 30 of 45.

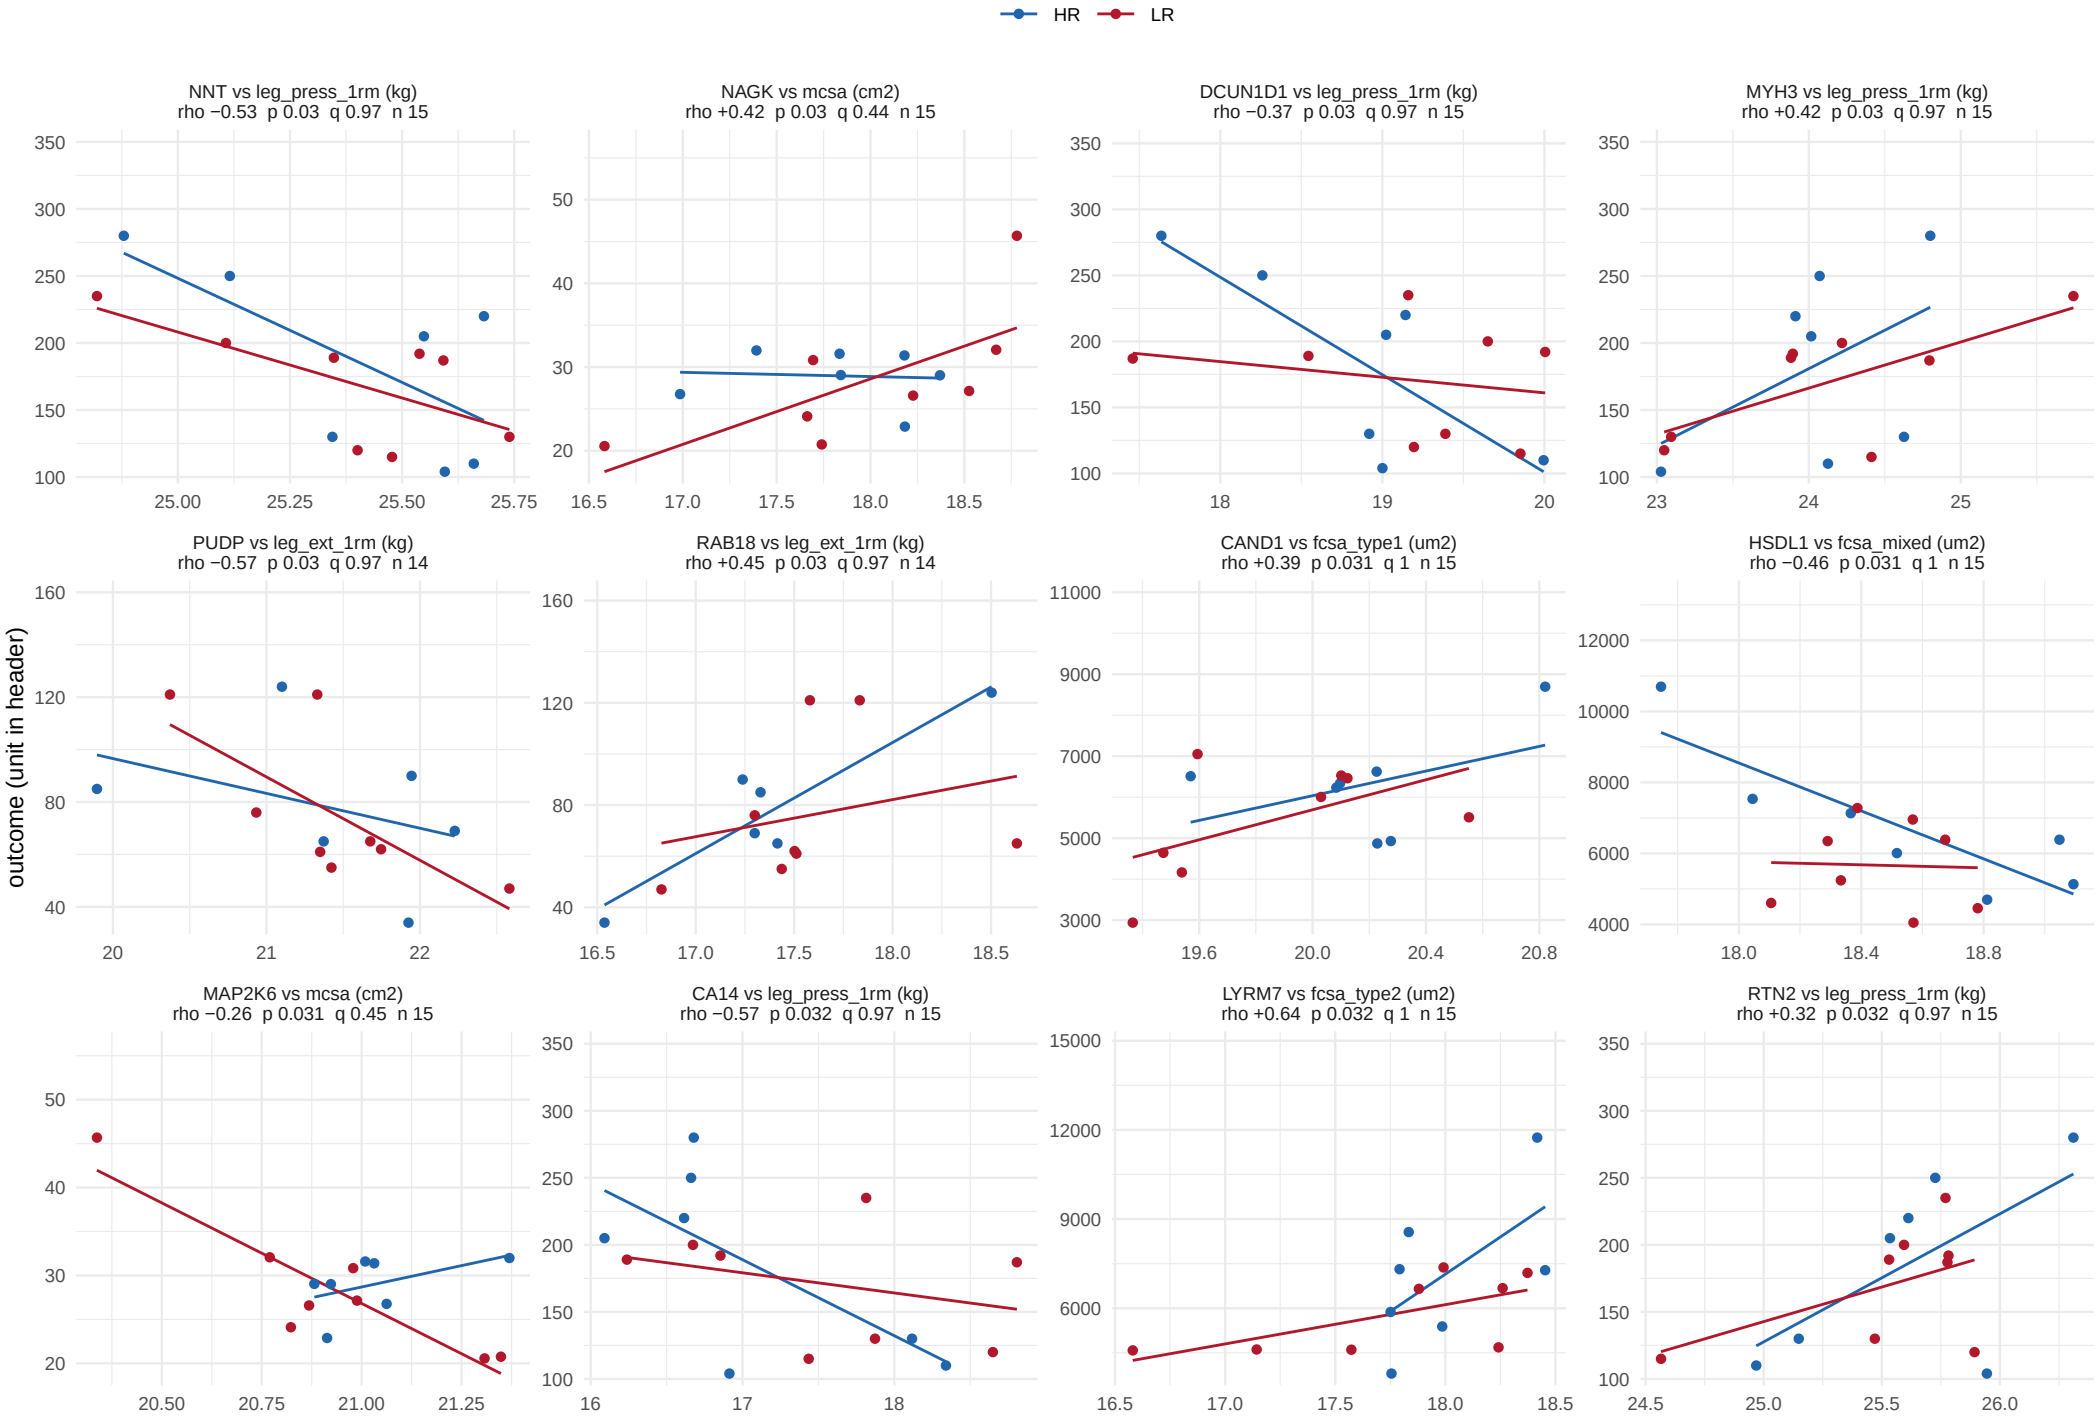

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, post_level window


534 of 11400 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 31 of 45.

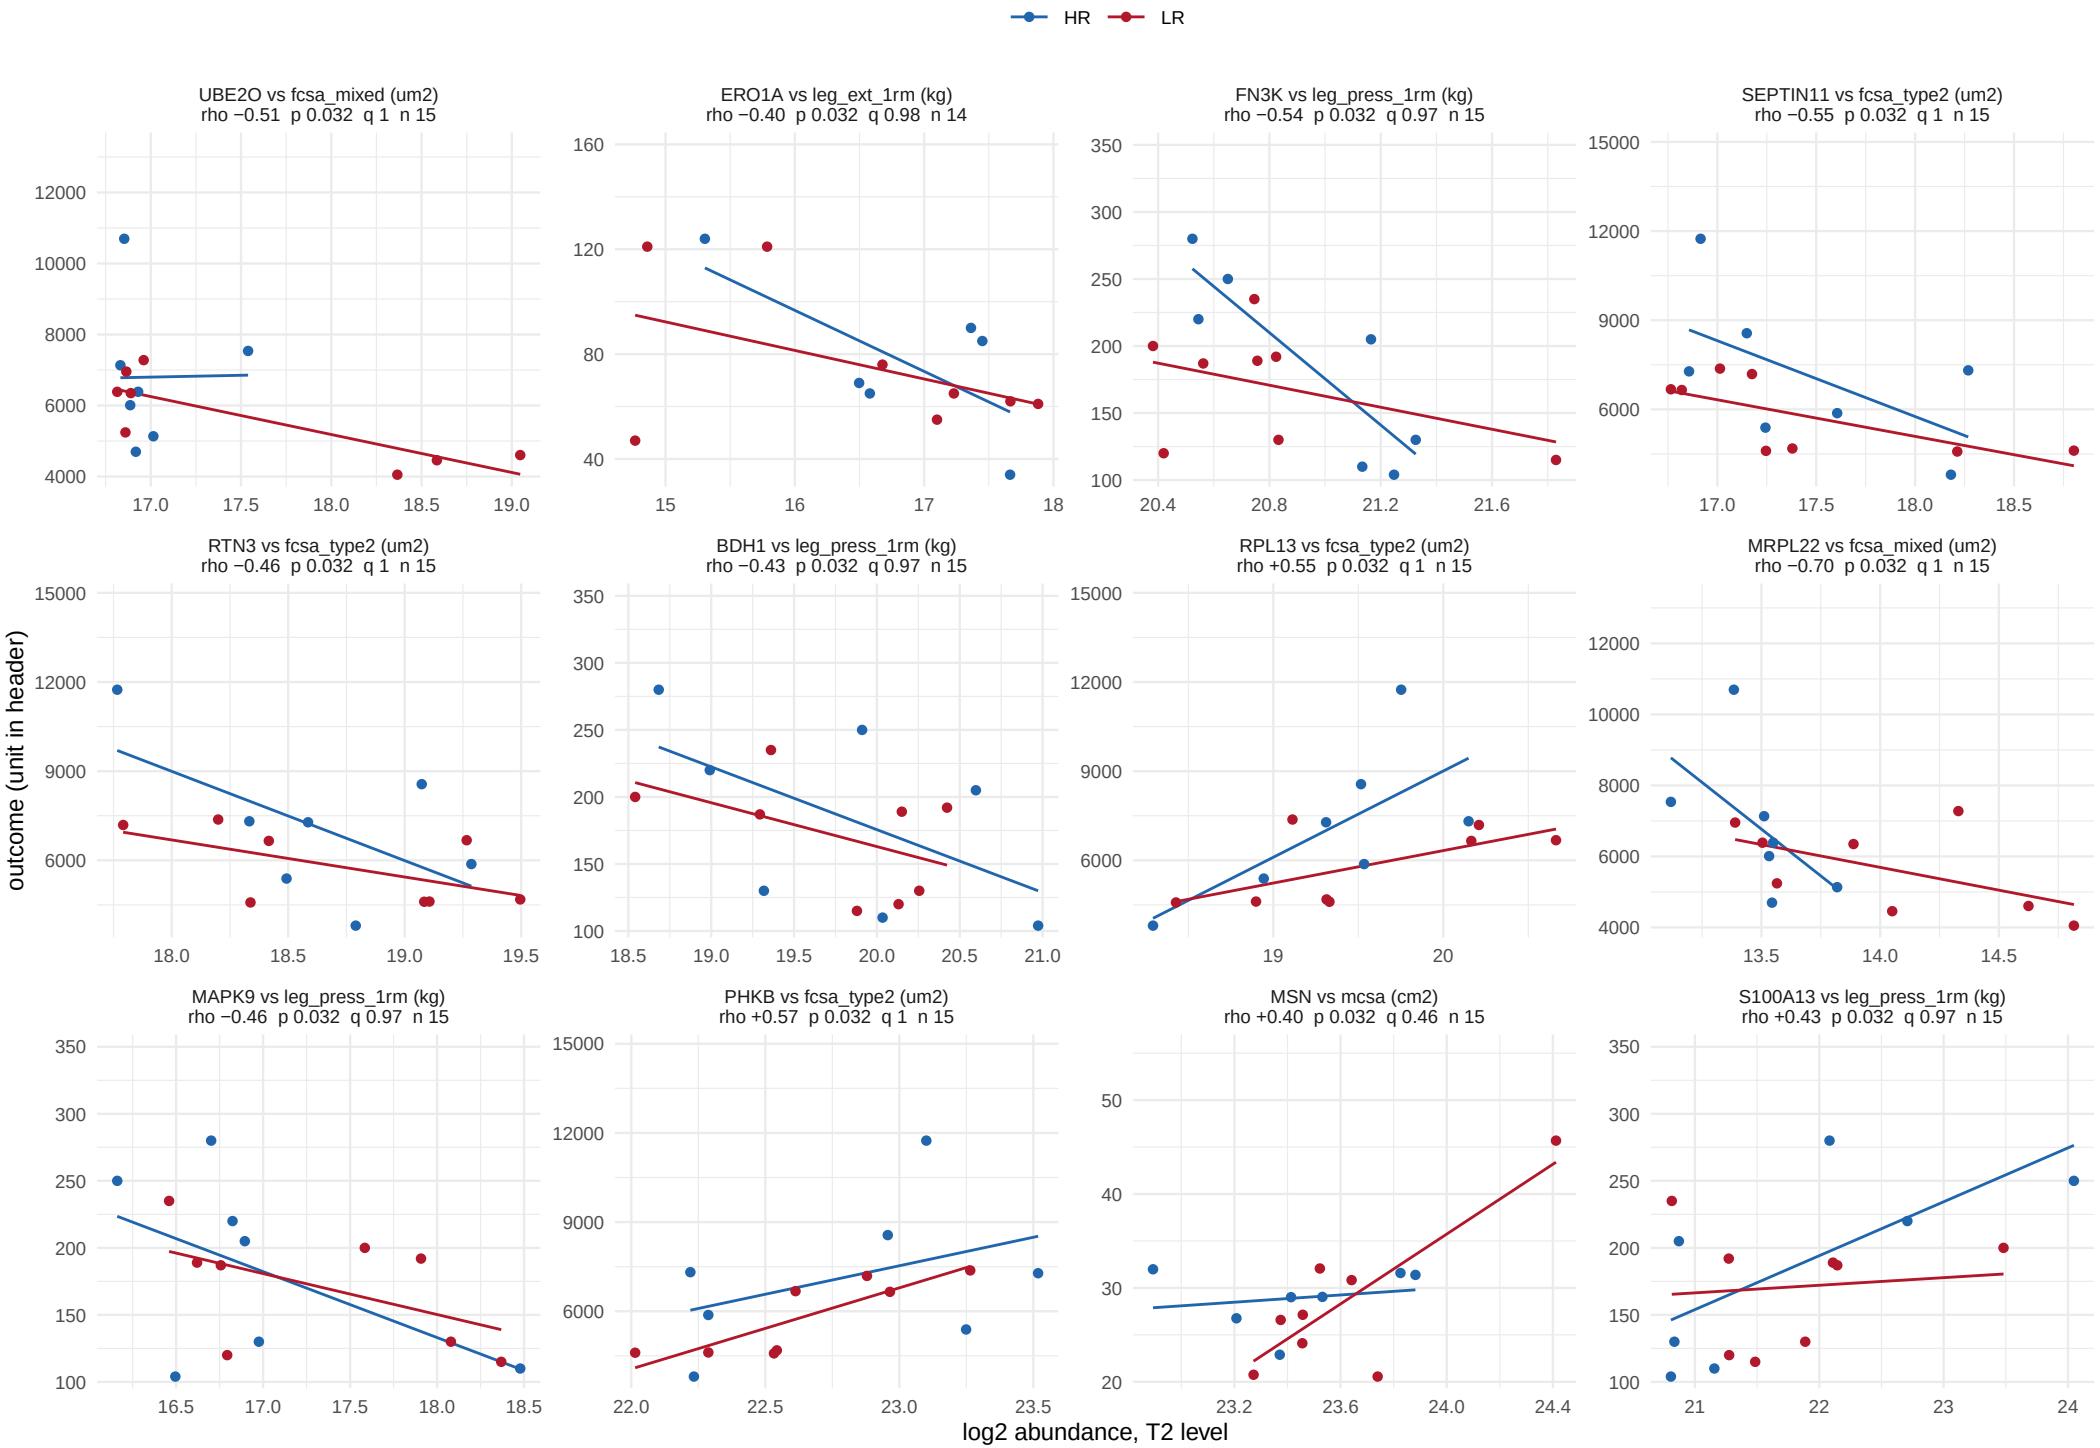

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, post_level window


534 of 11400 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 32 of 45.

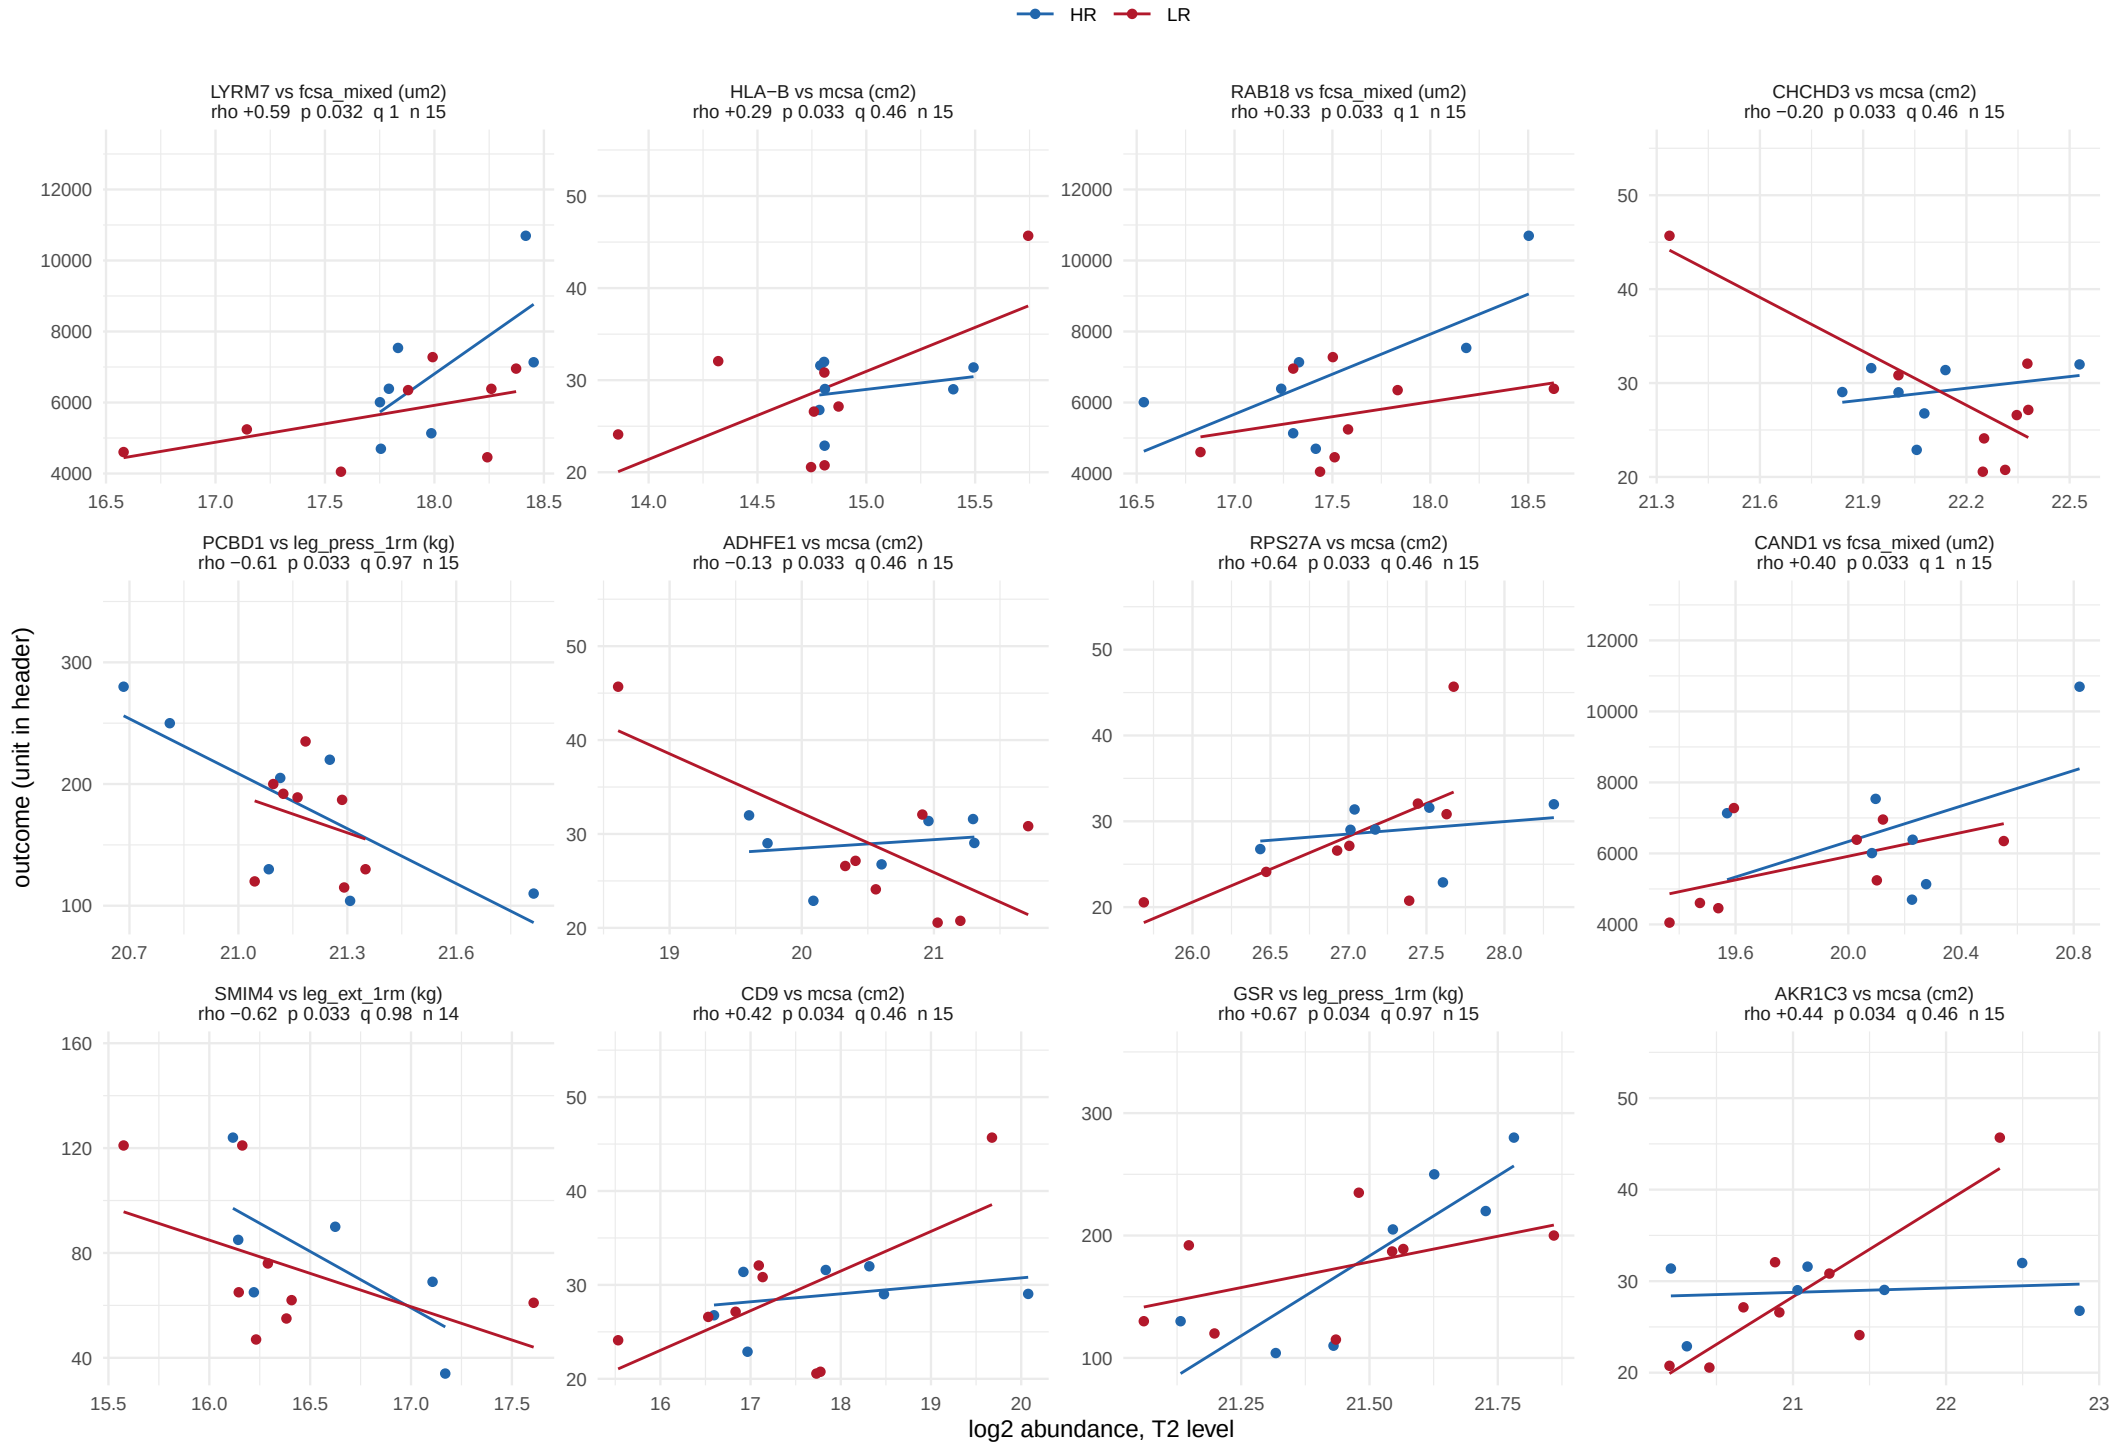

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, post_level window


534 of 11400 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 33 of 45.

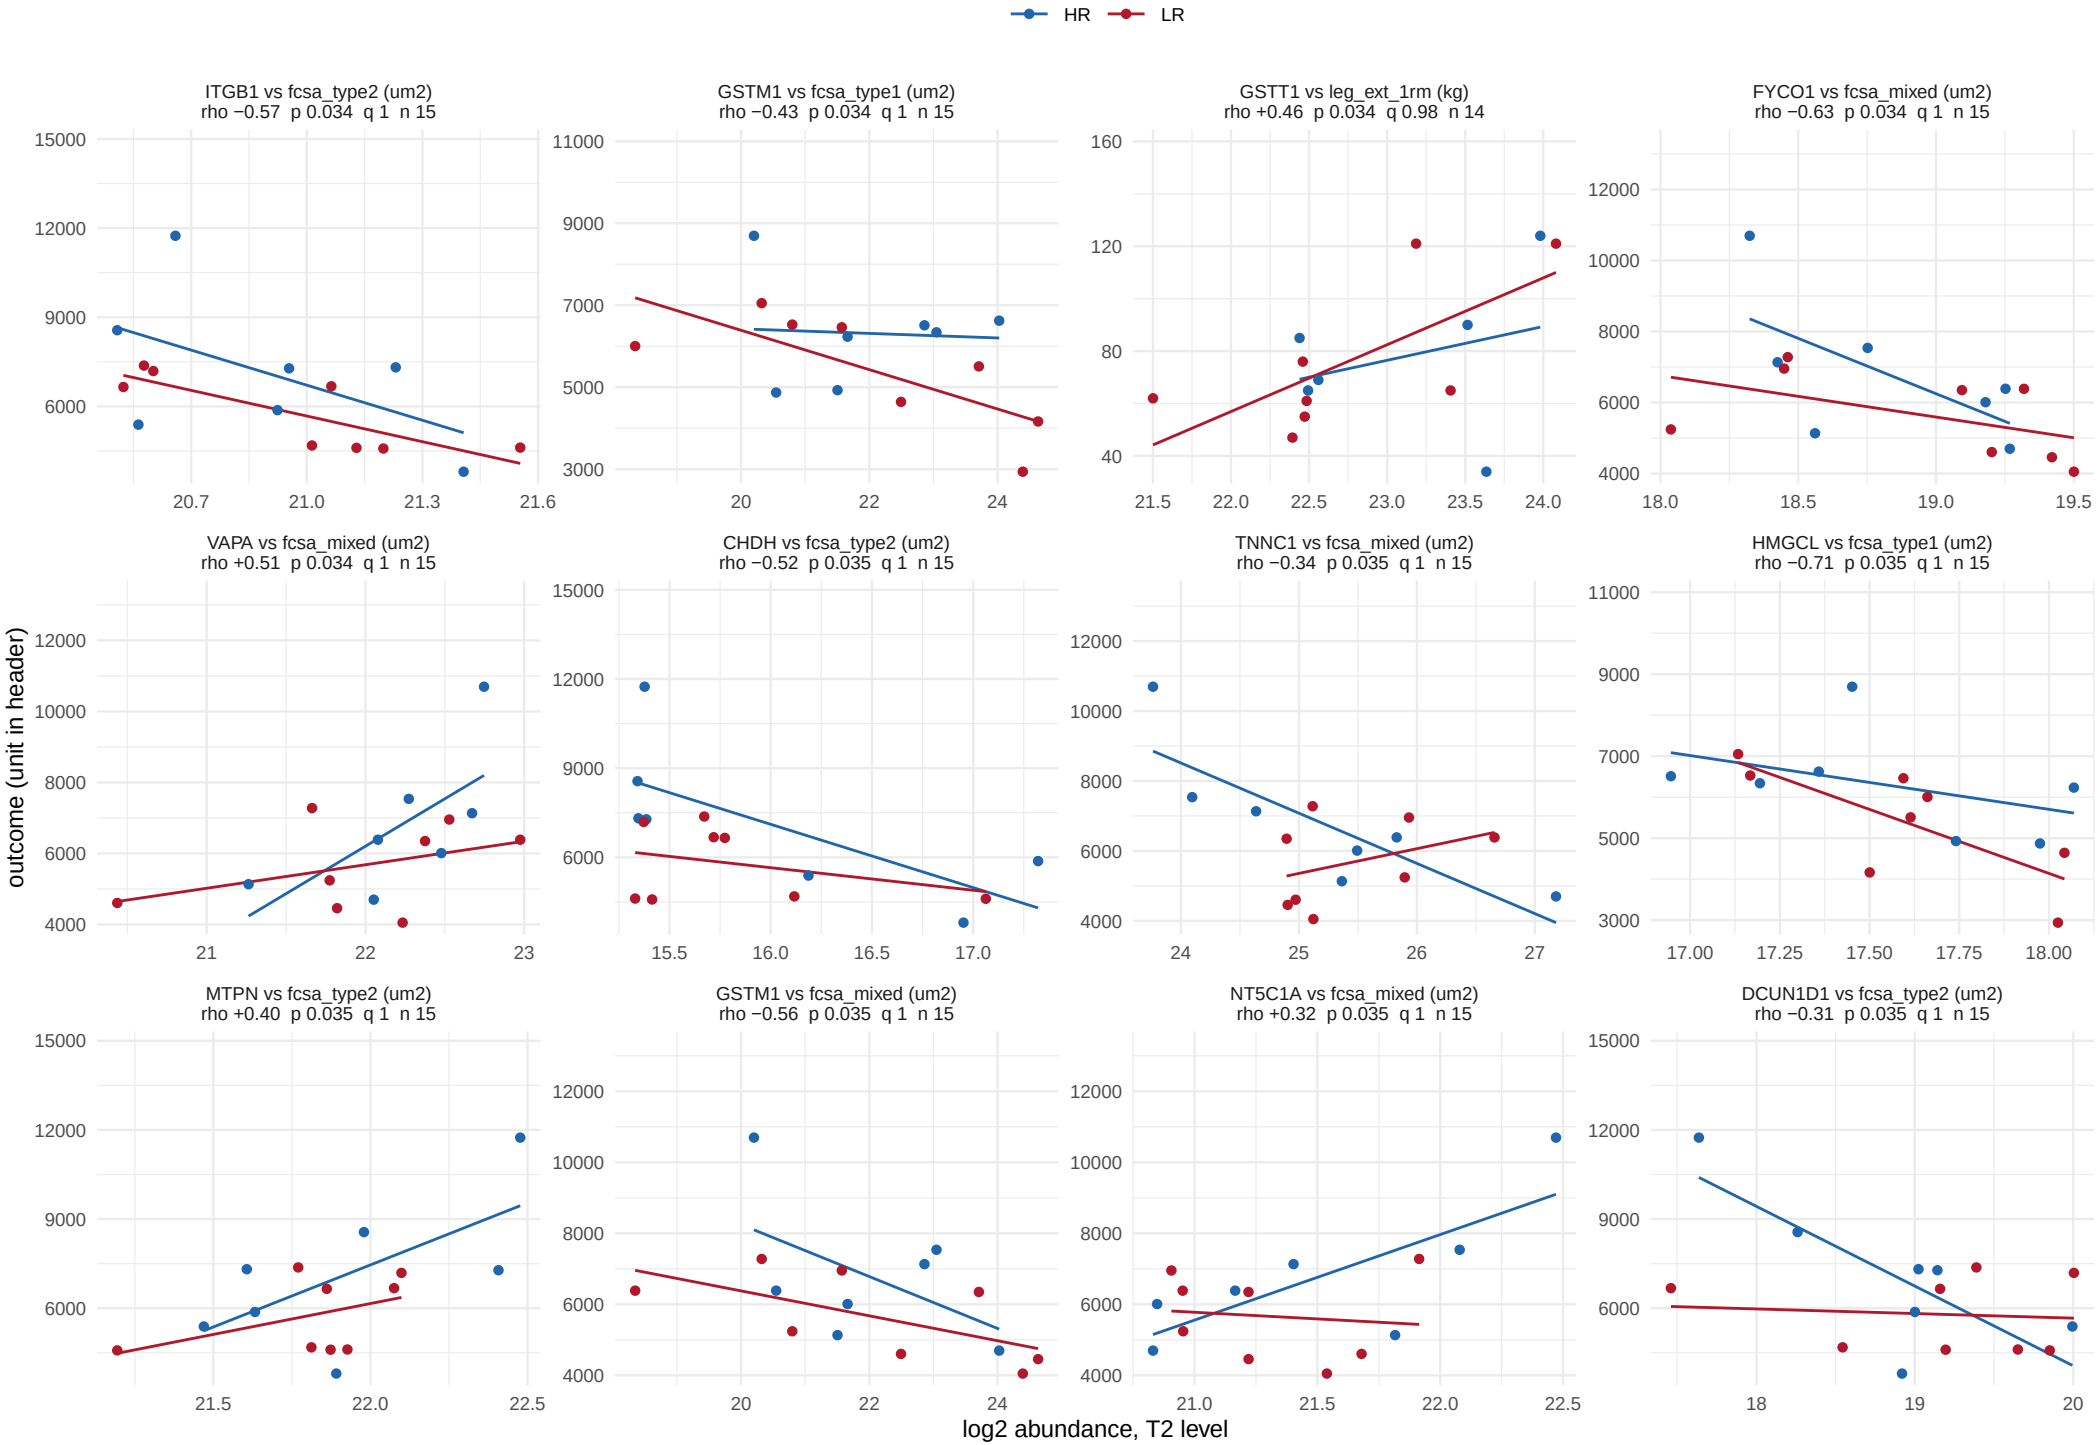

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, post_level window


534 of 11400 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 34 of 45.

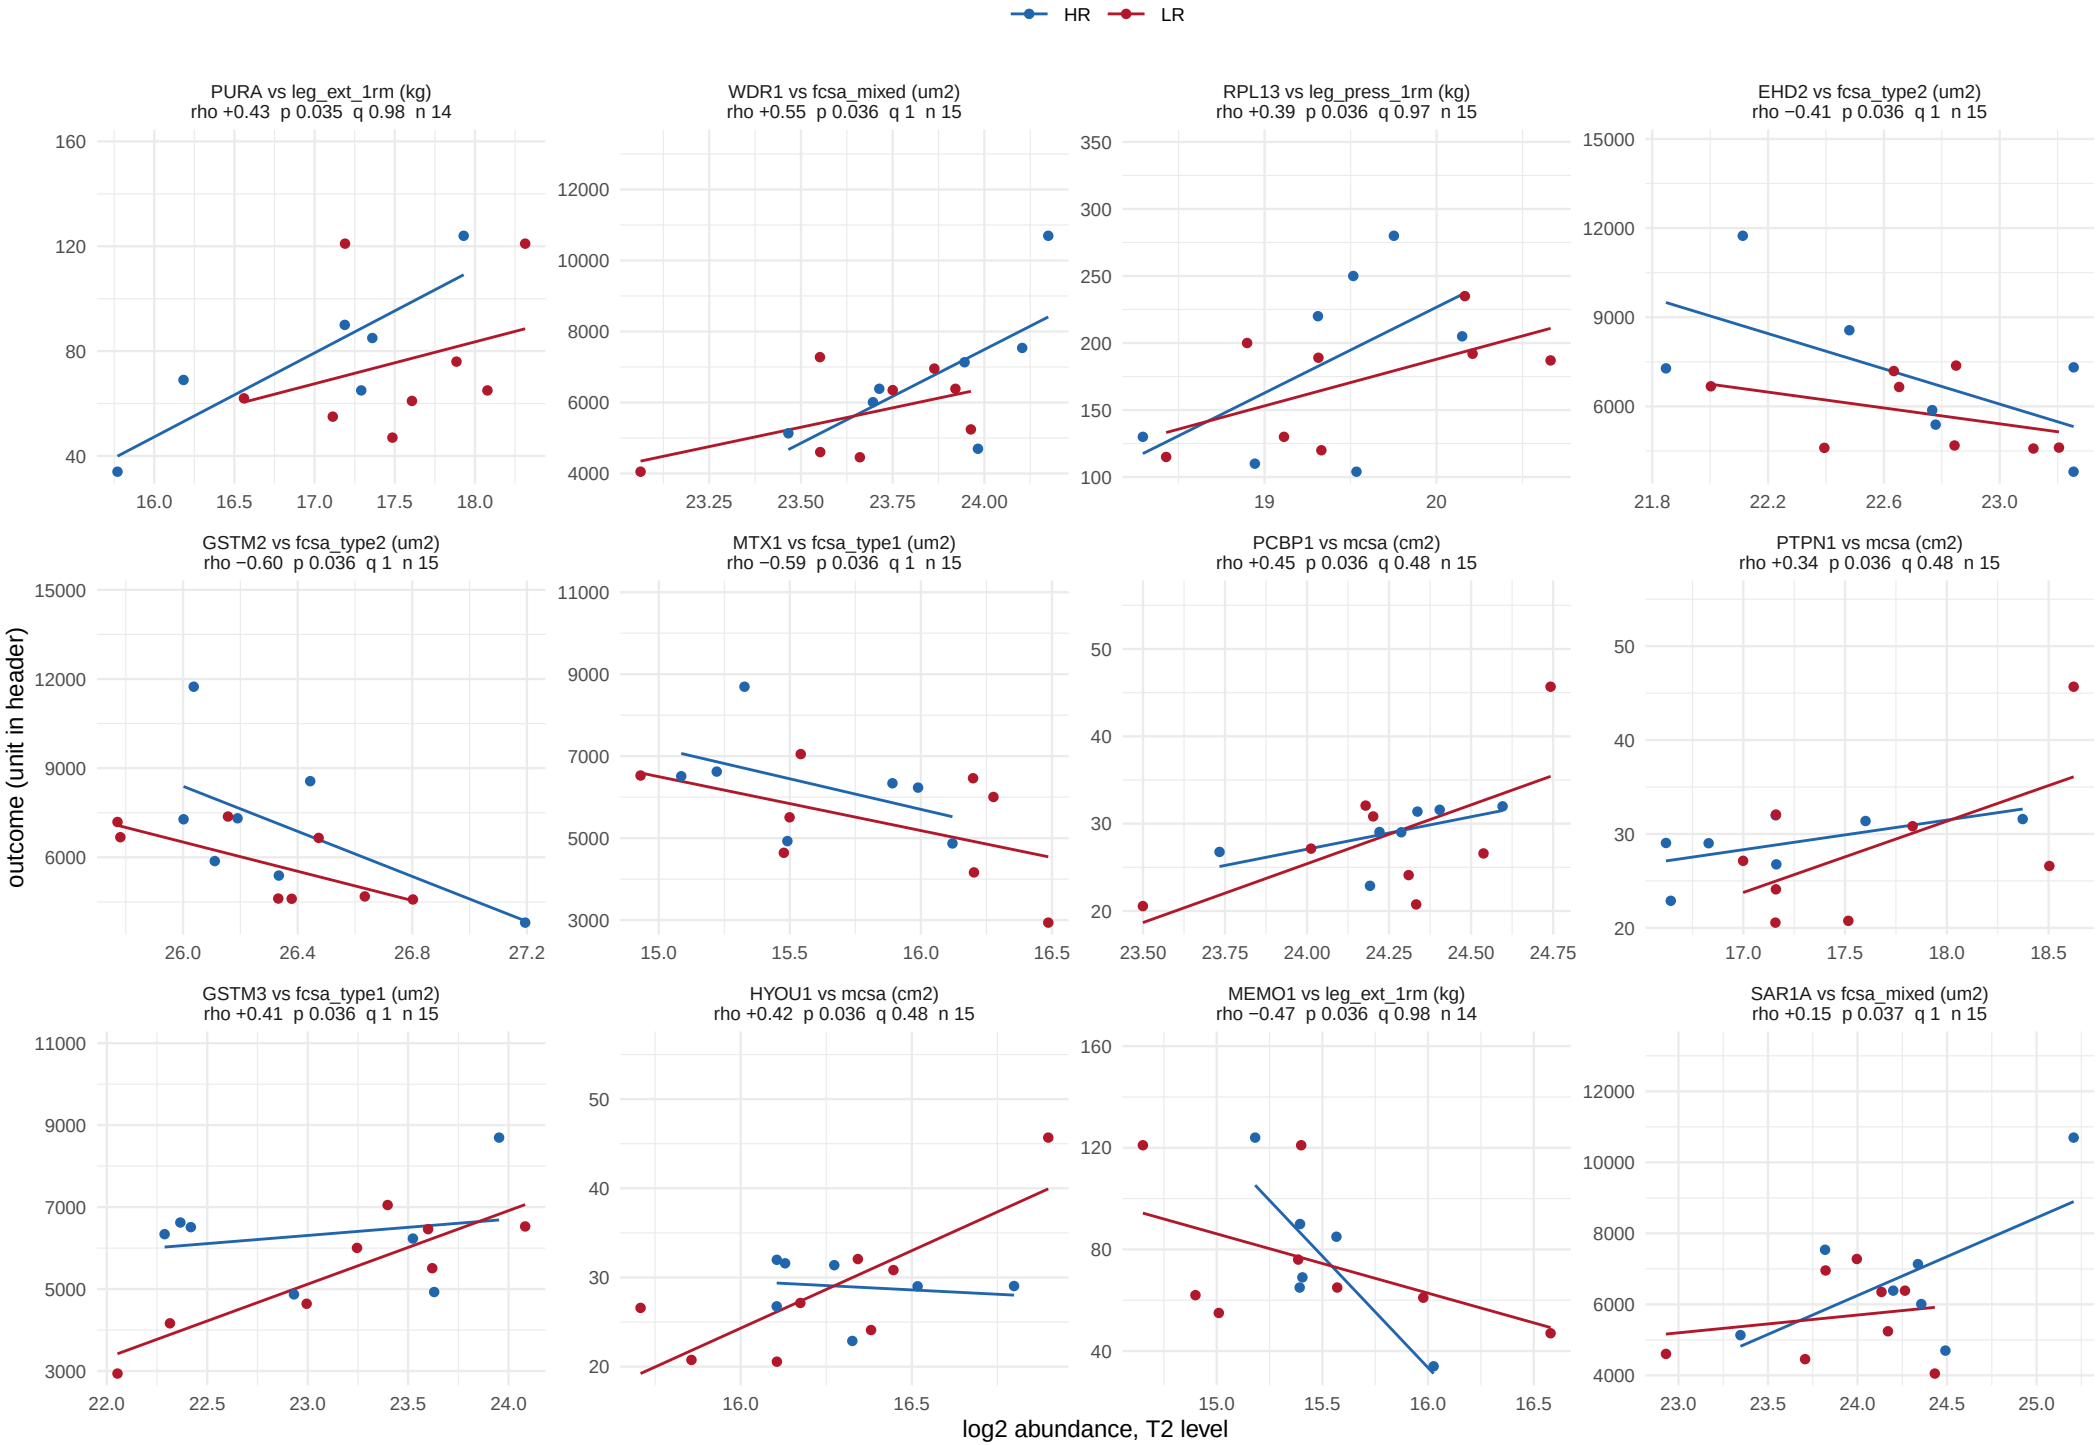

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, post_level window


534 of 11400 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 35 of 45.

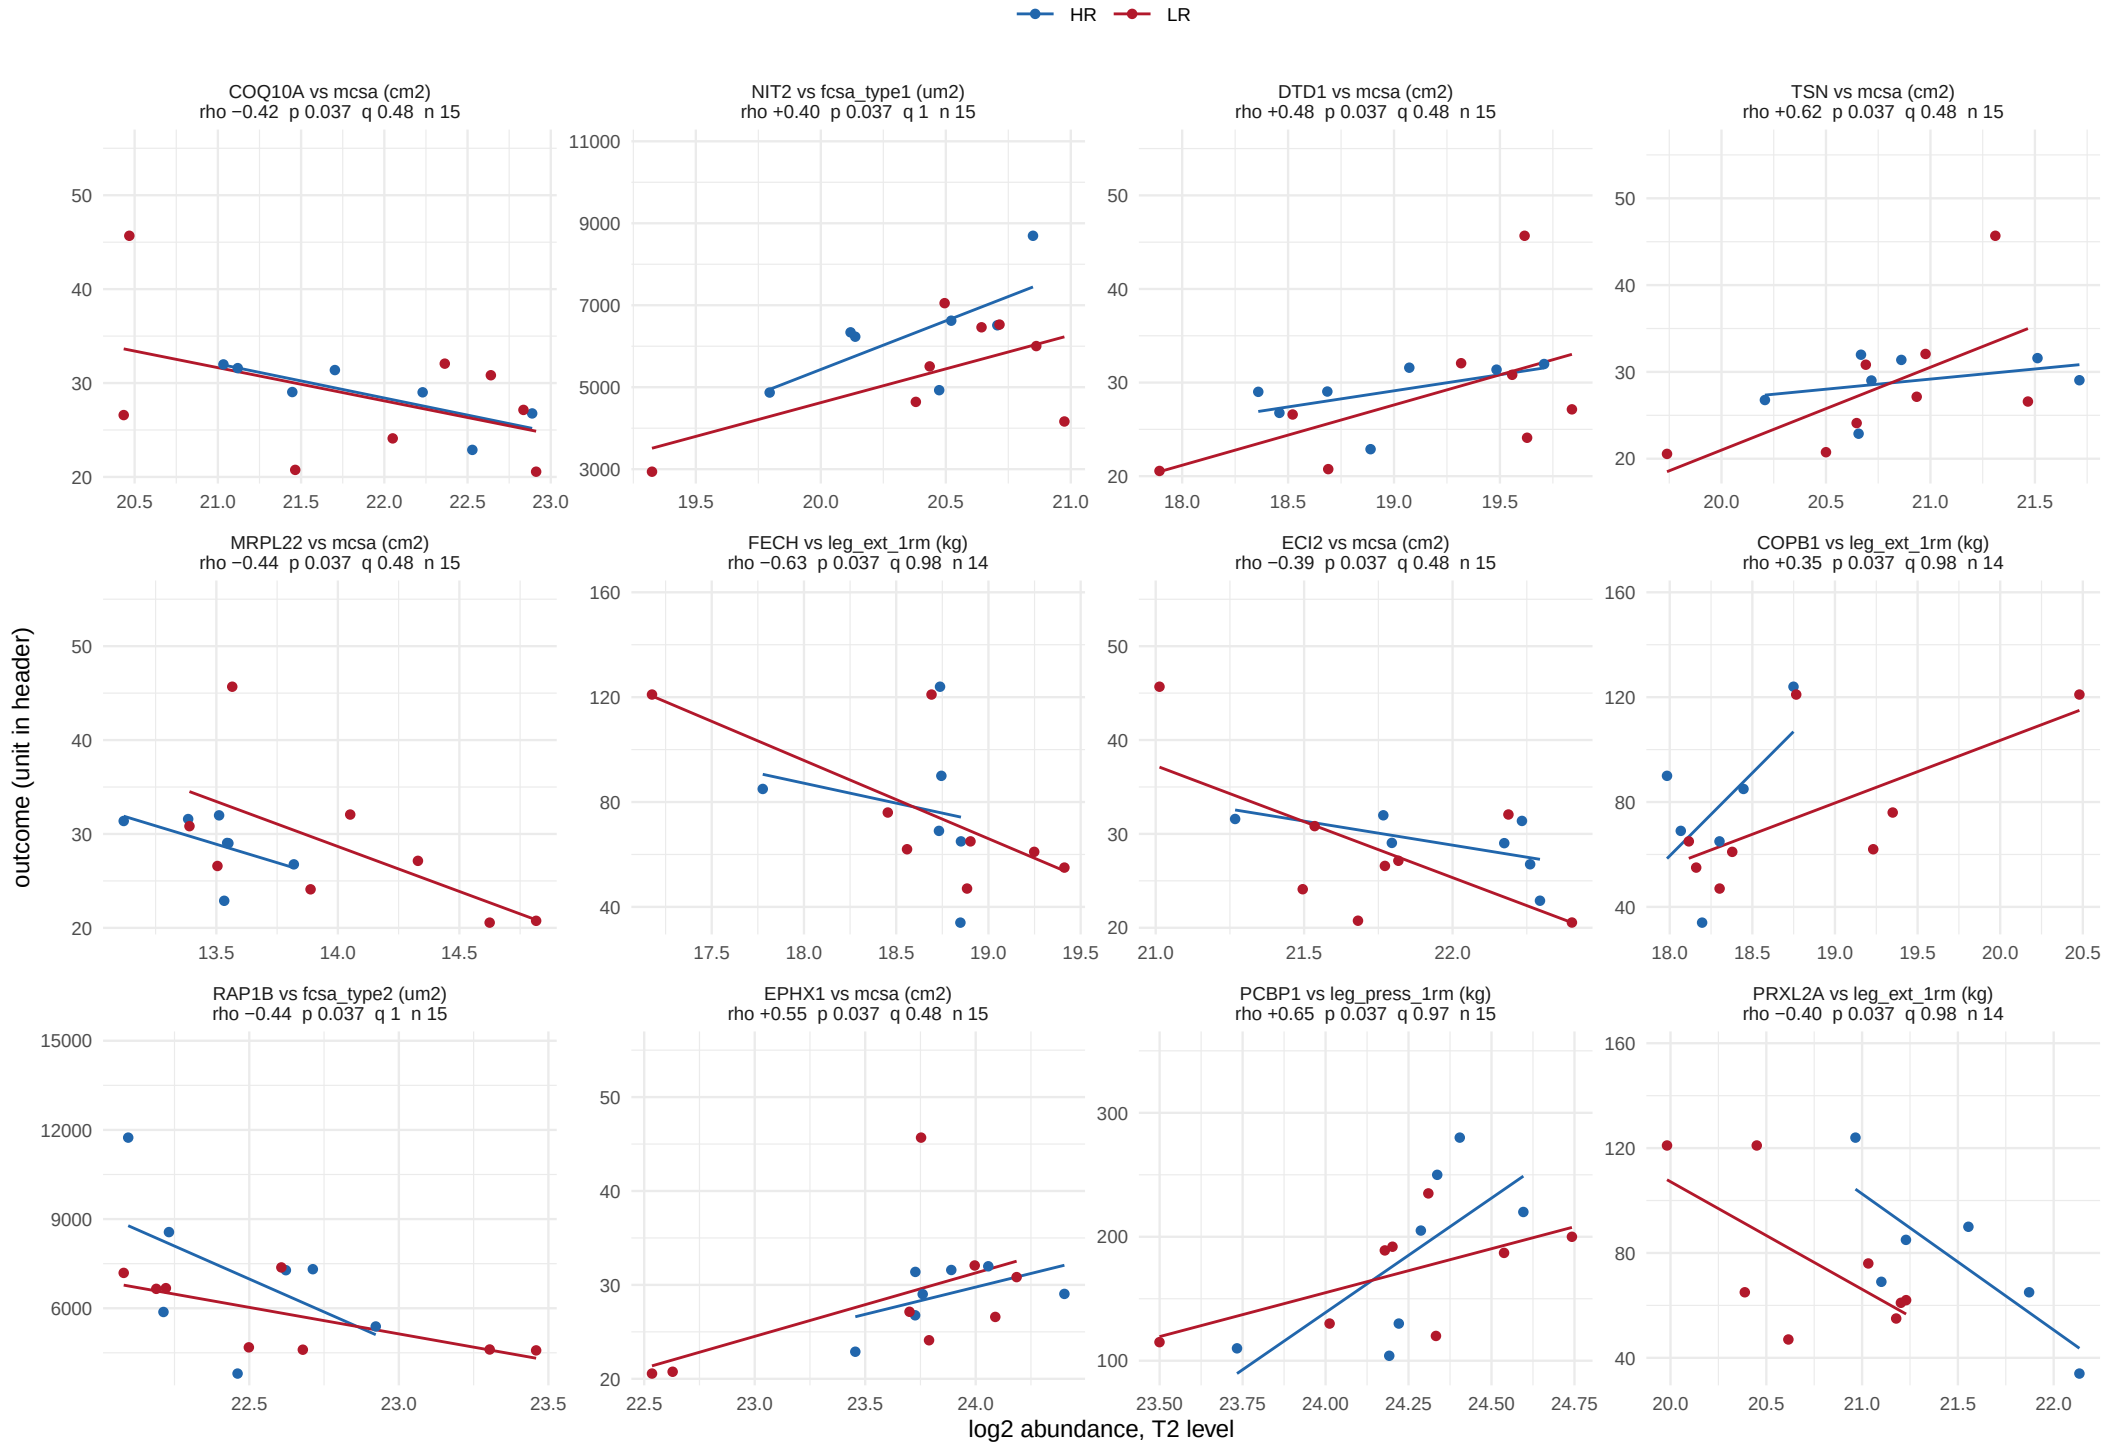

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, post_level window


534 of 11400 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 36 of 45.

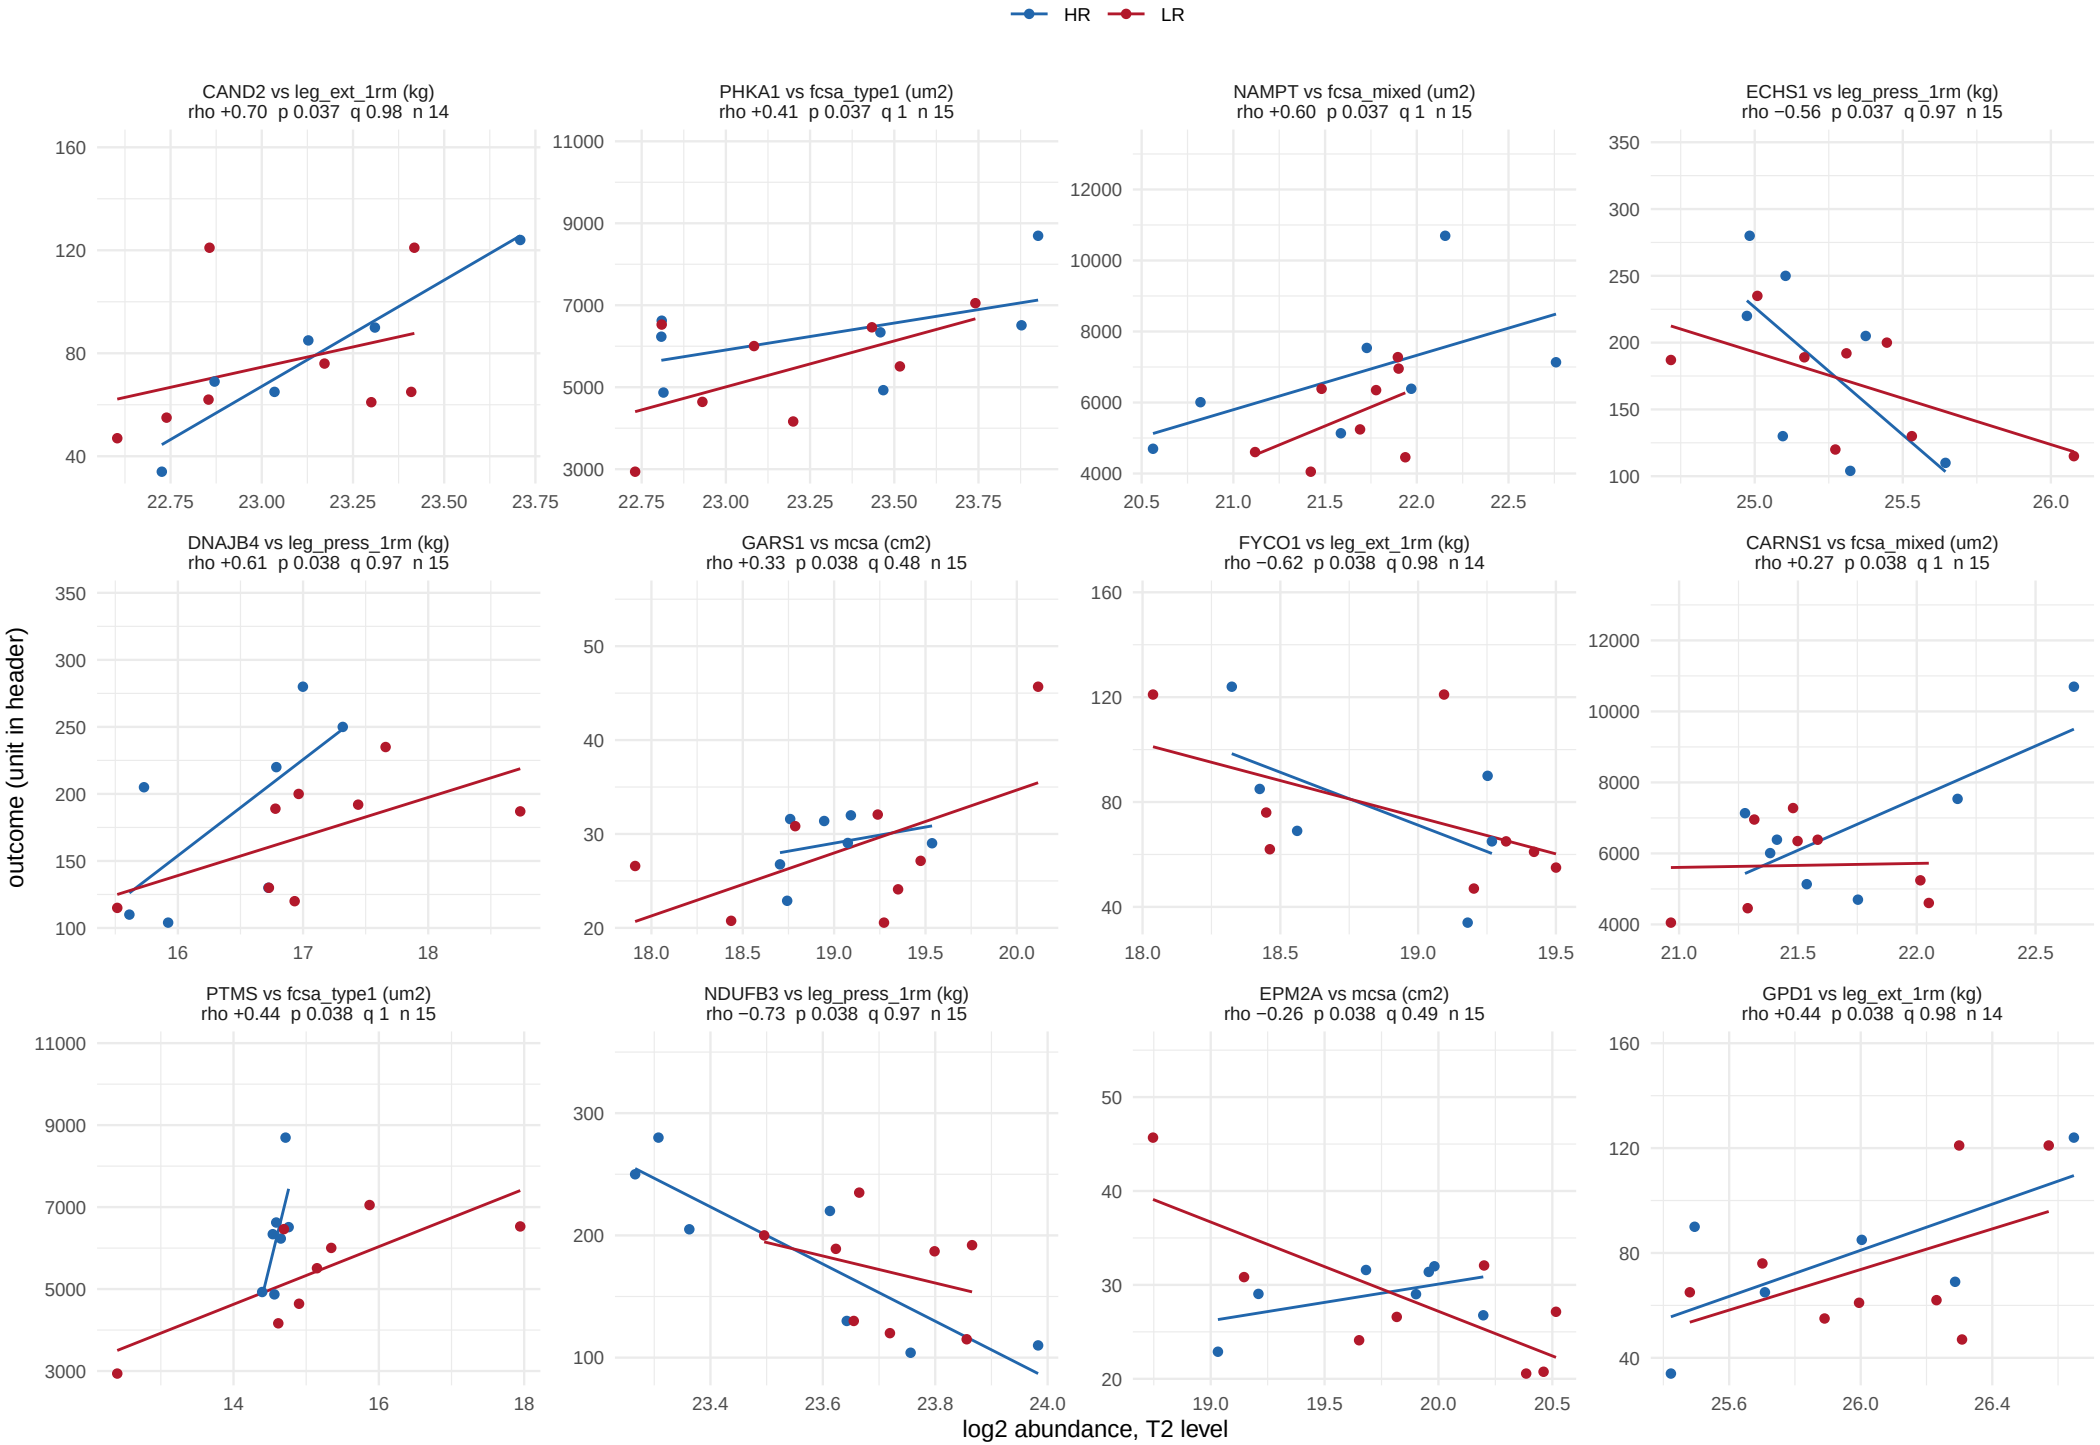

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, post_level window

534 of 11400 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 37 of 45.

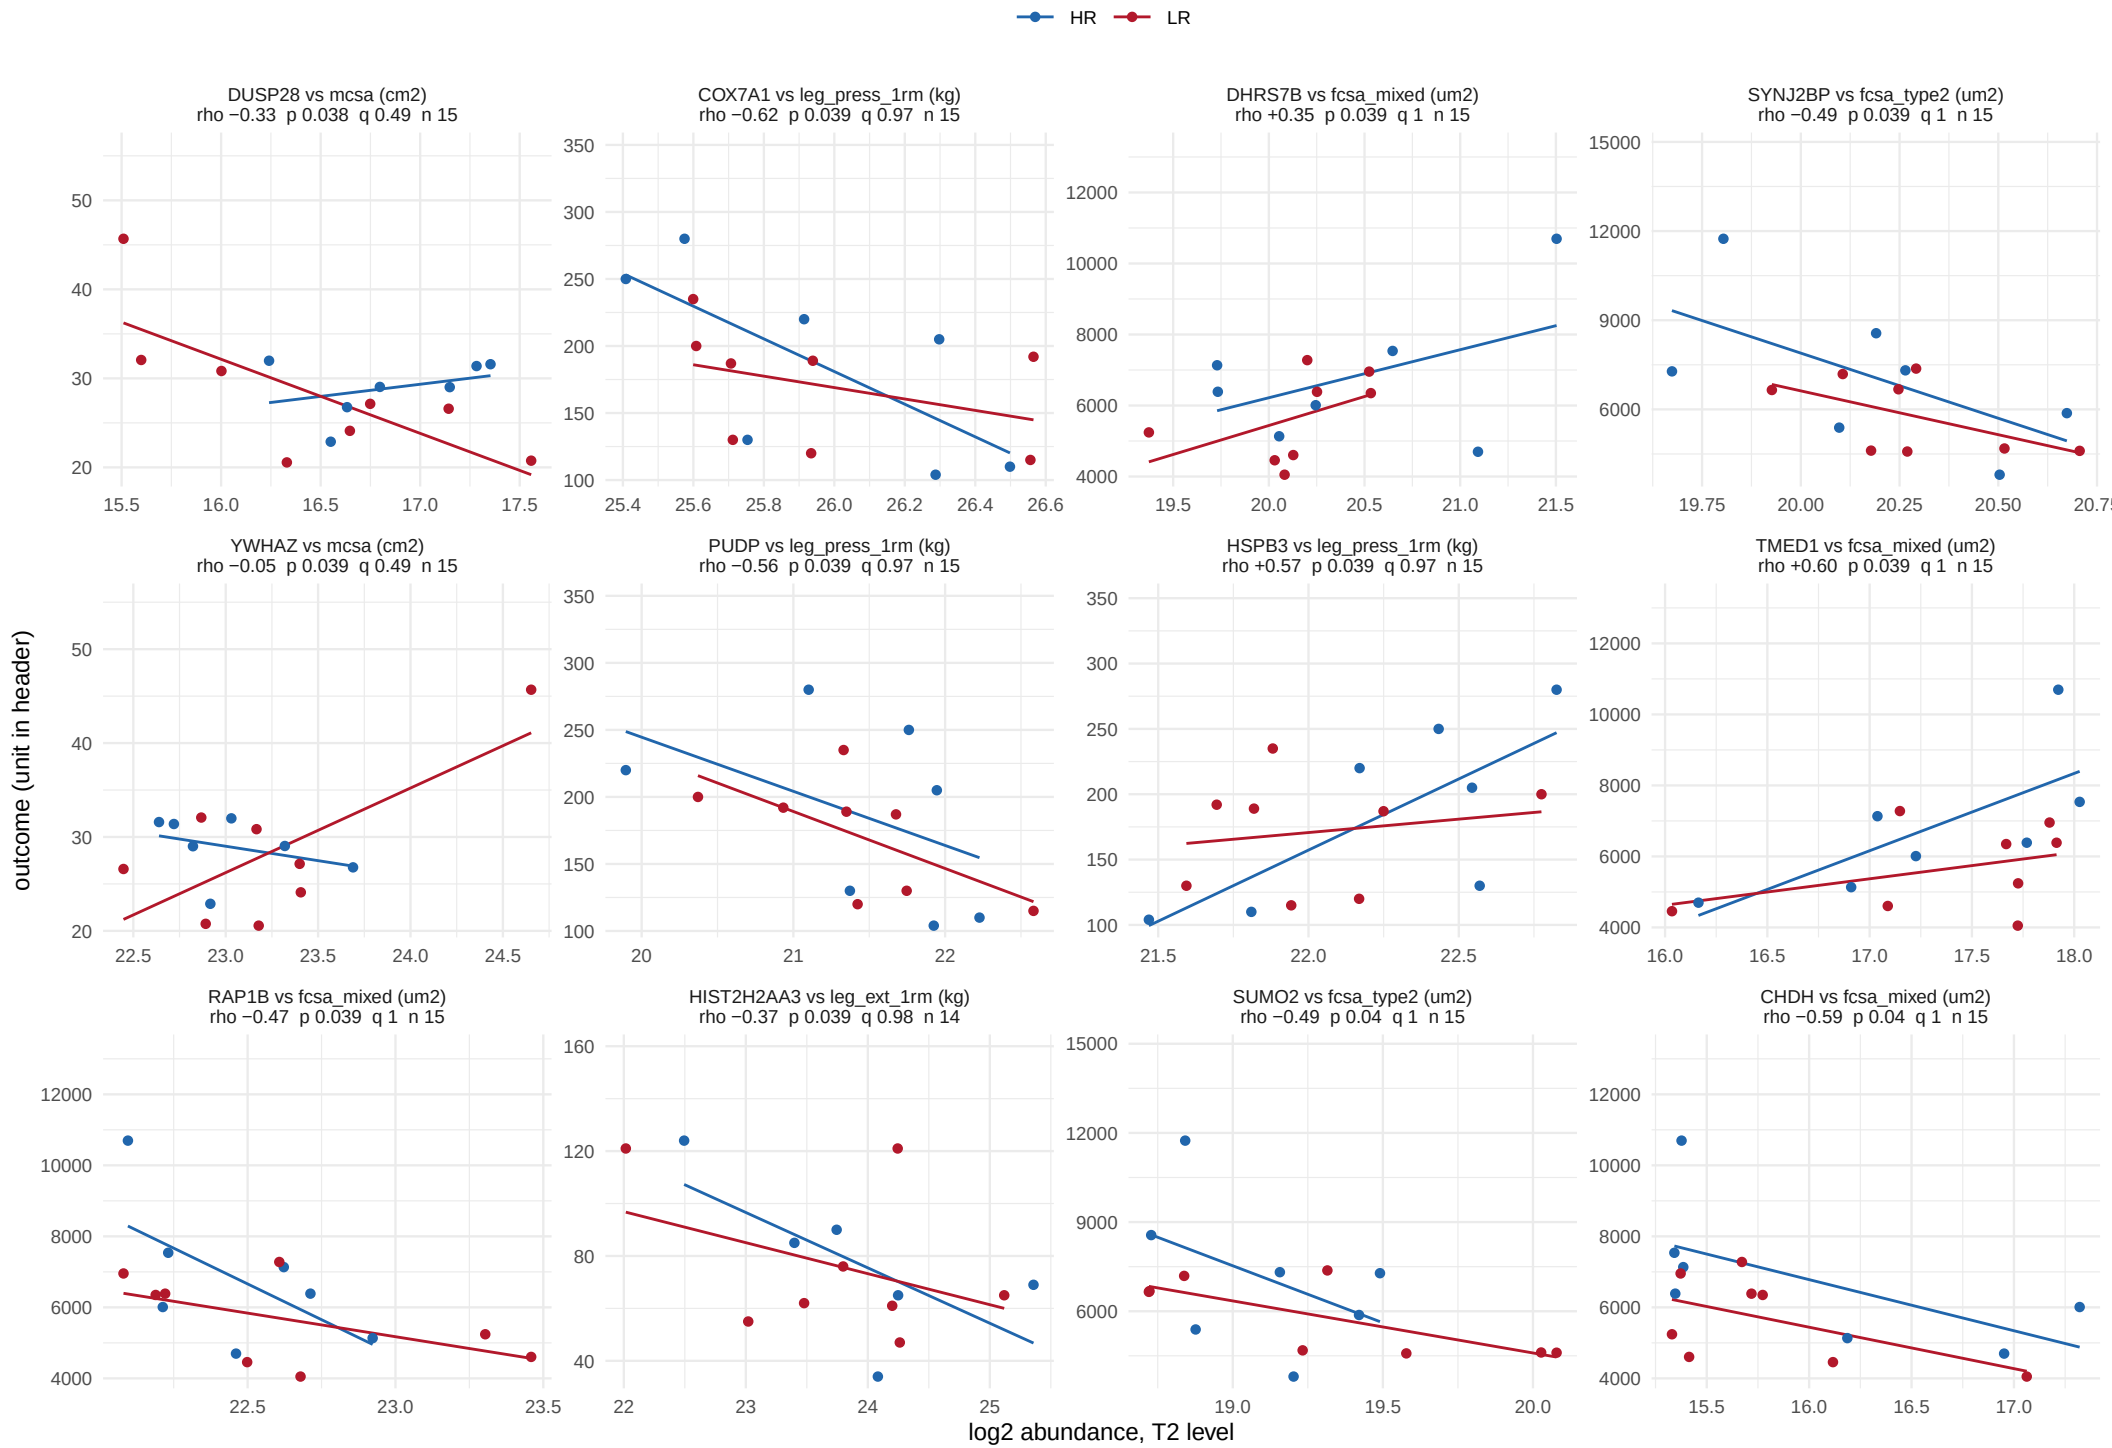

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, post_level window


534 of 11400 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 38 of 45.



One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, post_level window


534 of 11400 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 39 of 45.

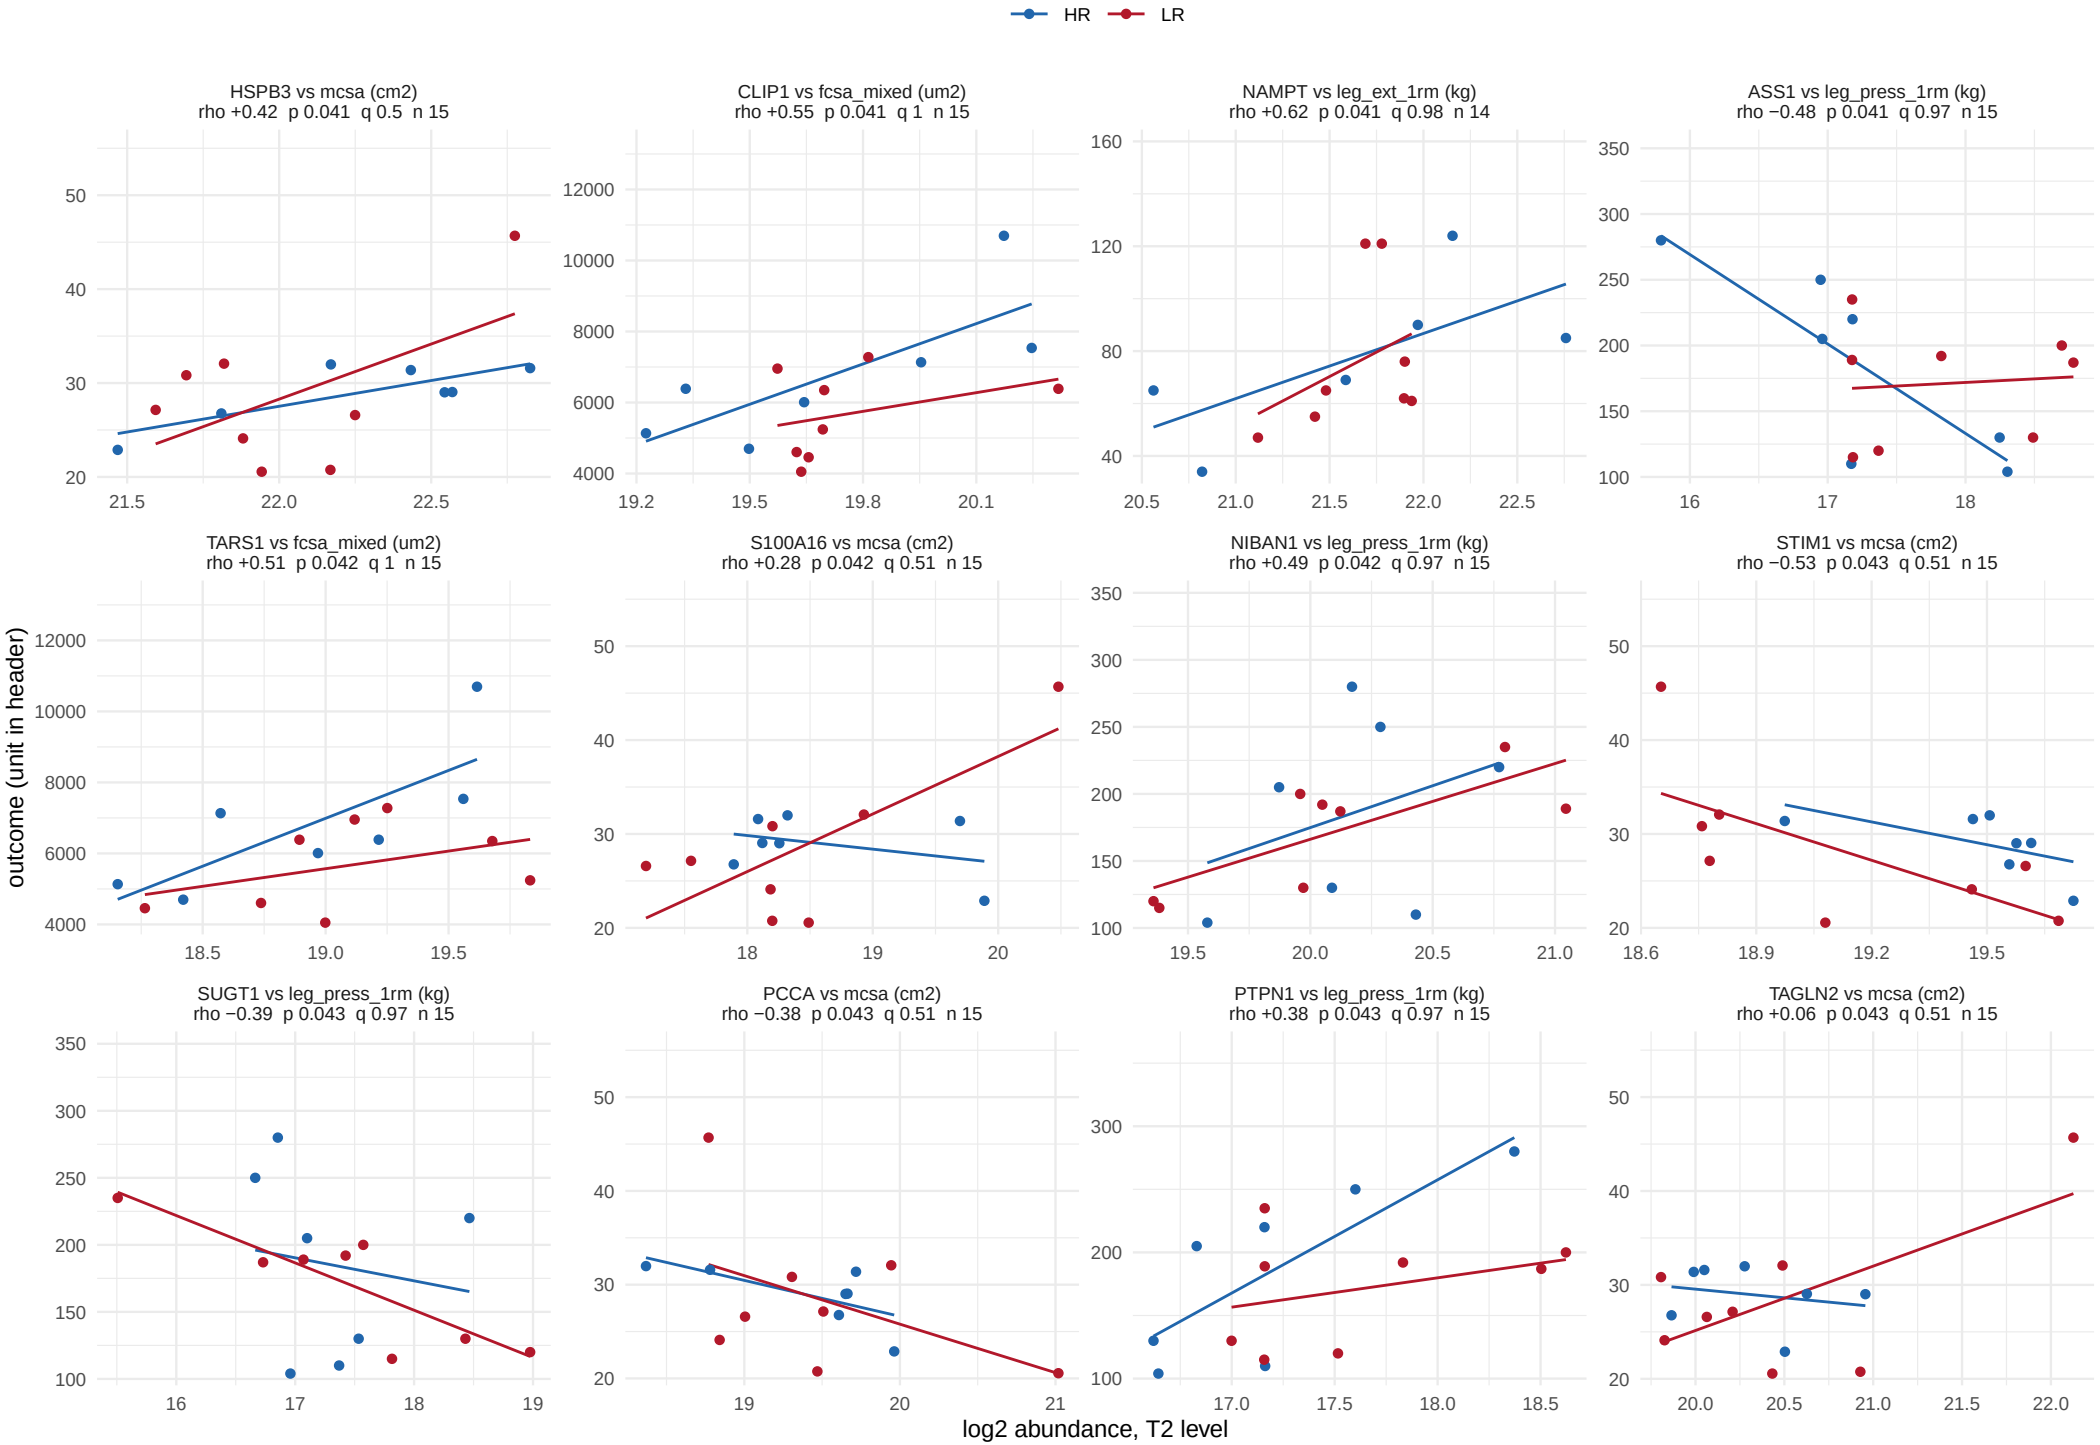

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, post_level window


534 of 11400 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 40 of 45.

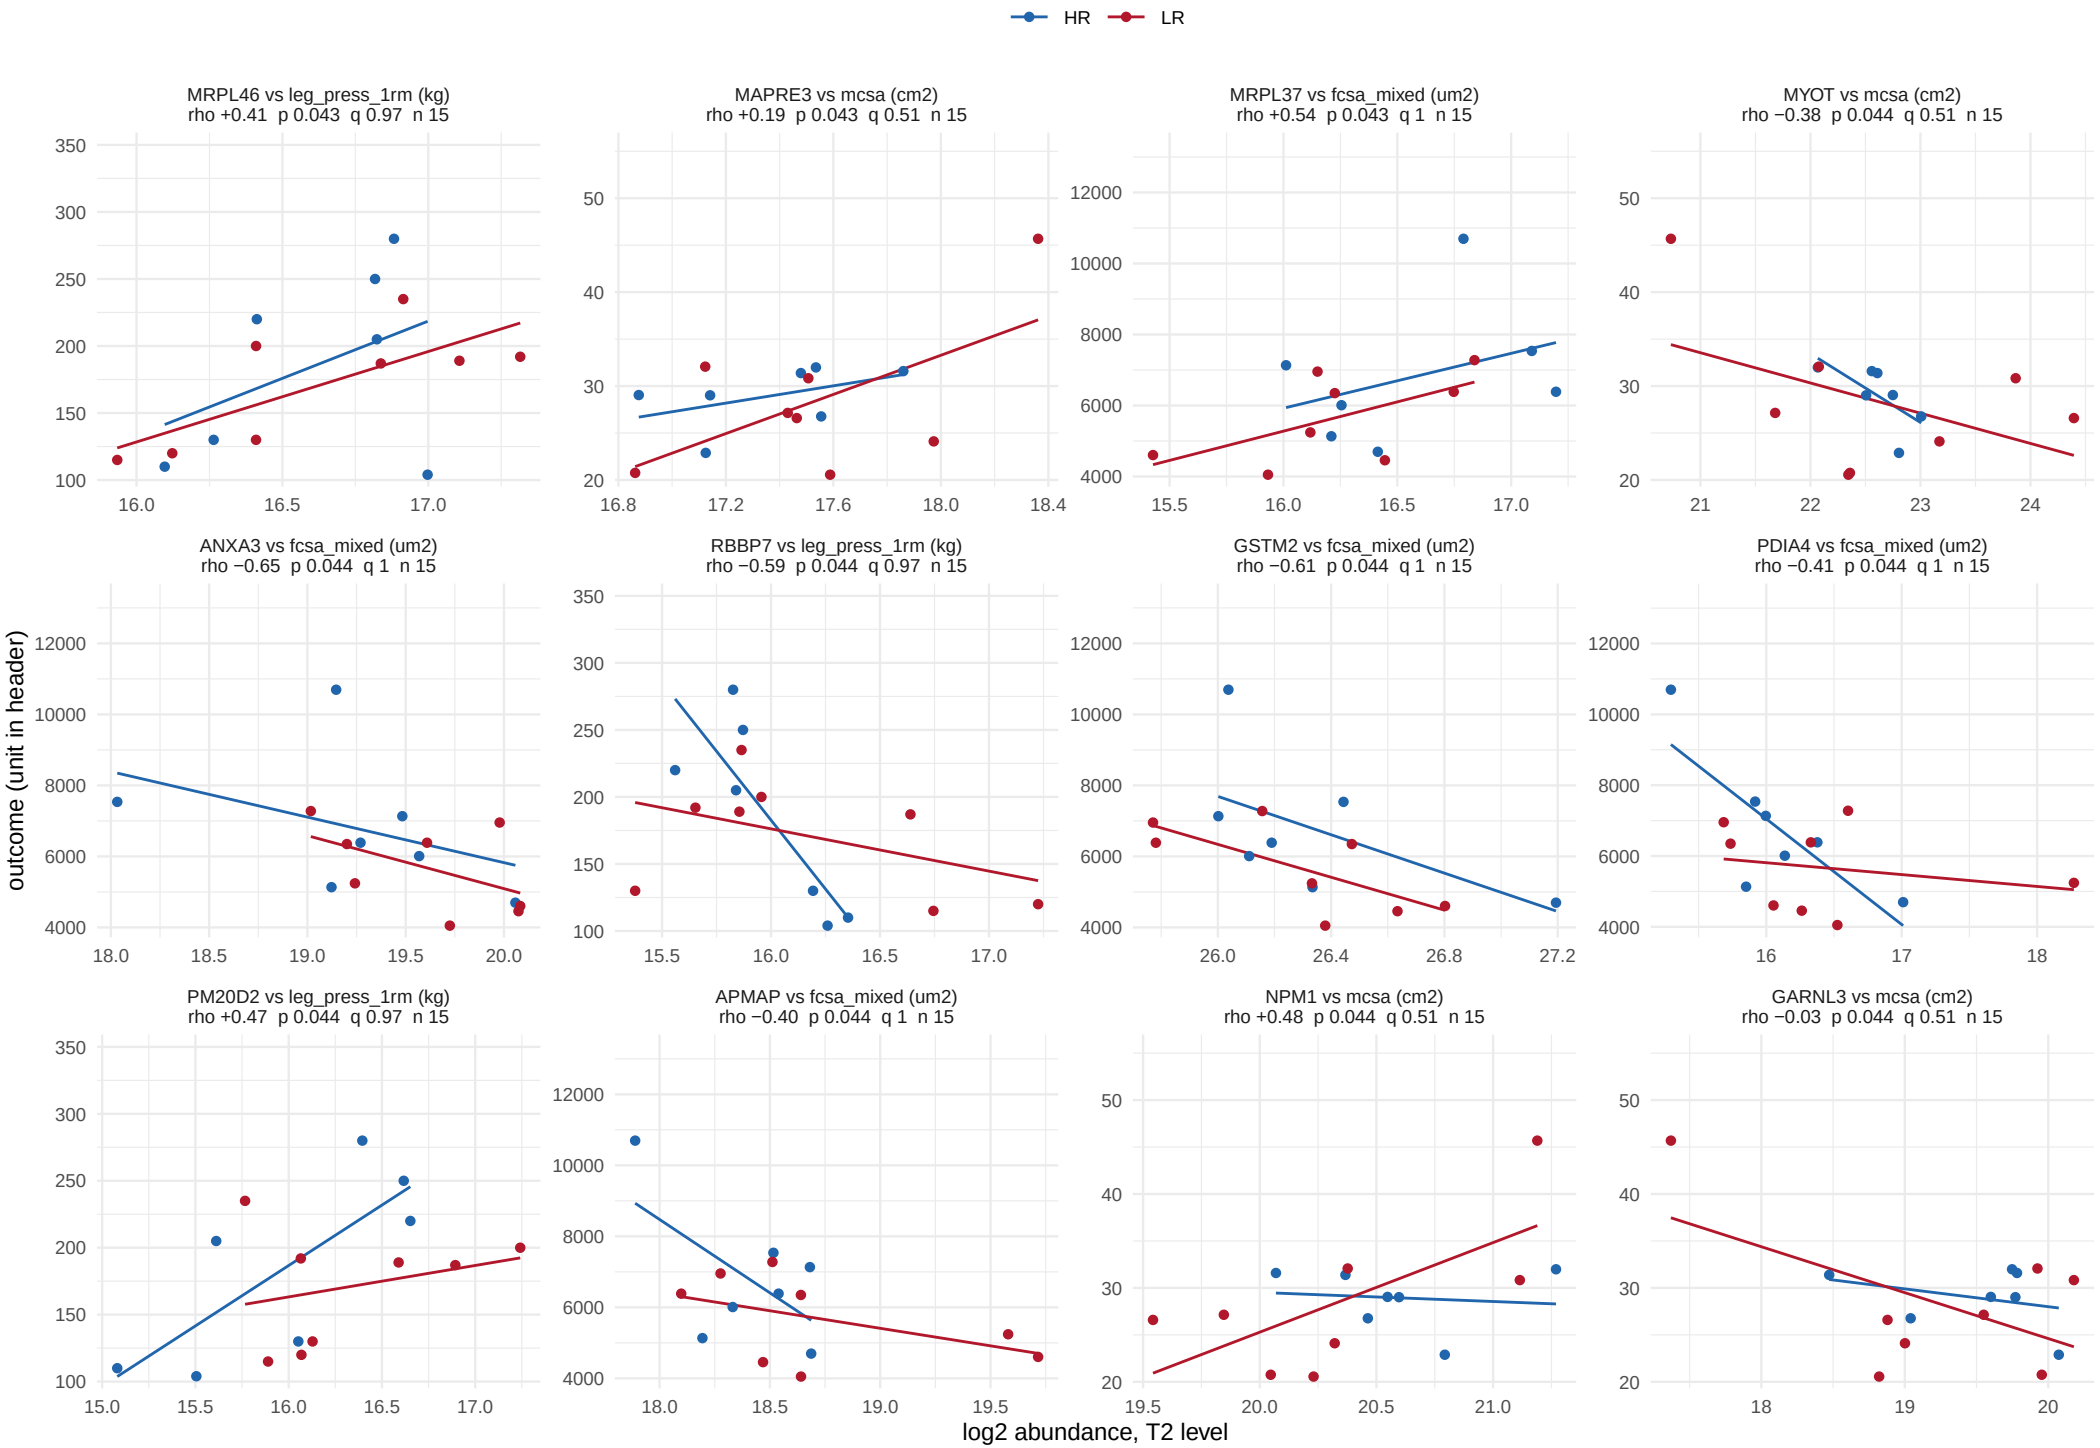

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, post_level window


534 of 11400 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 41 of 45.

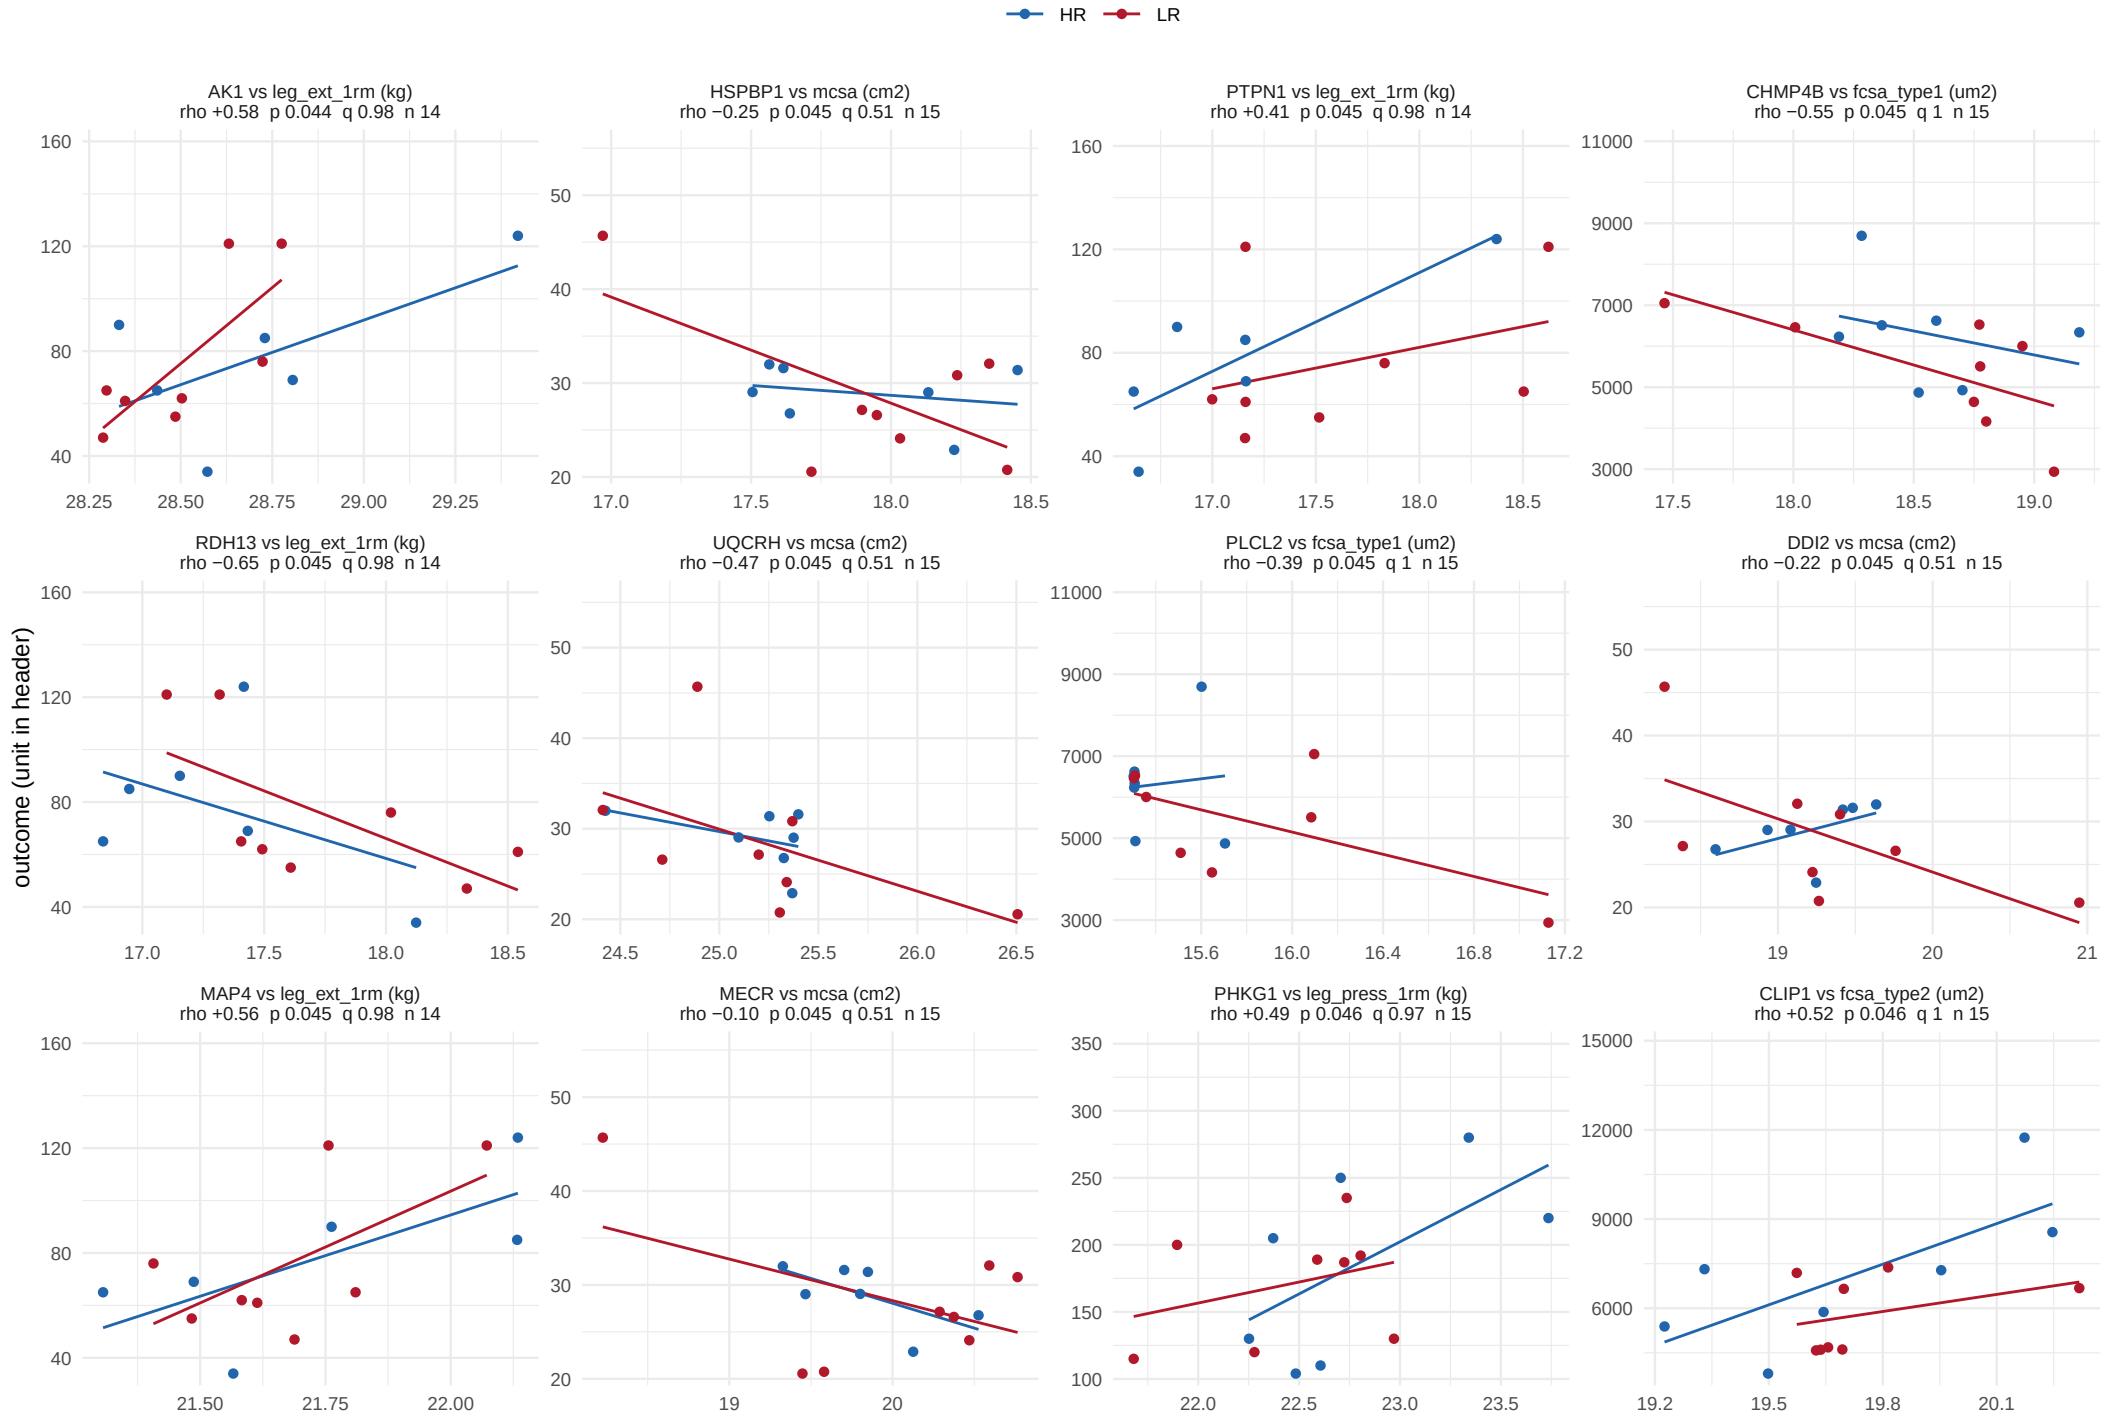

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, post_level window


534 of 11400 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 42 of 45.

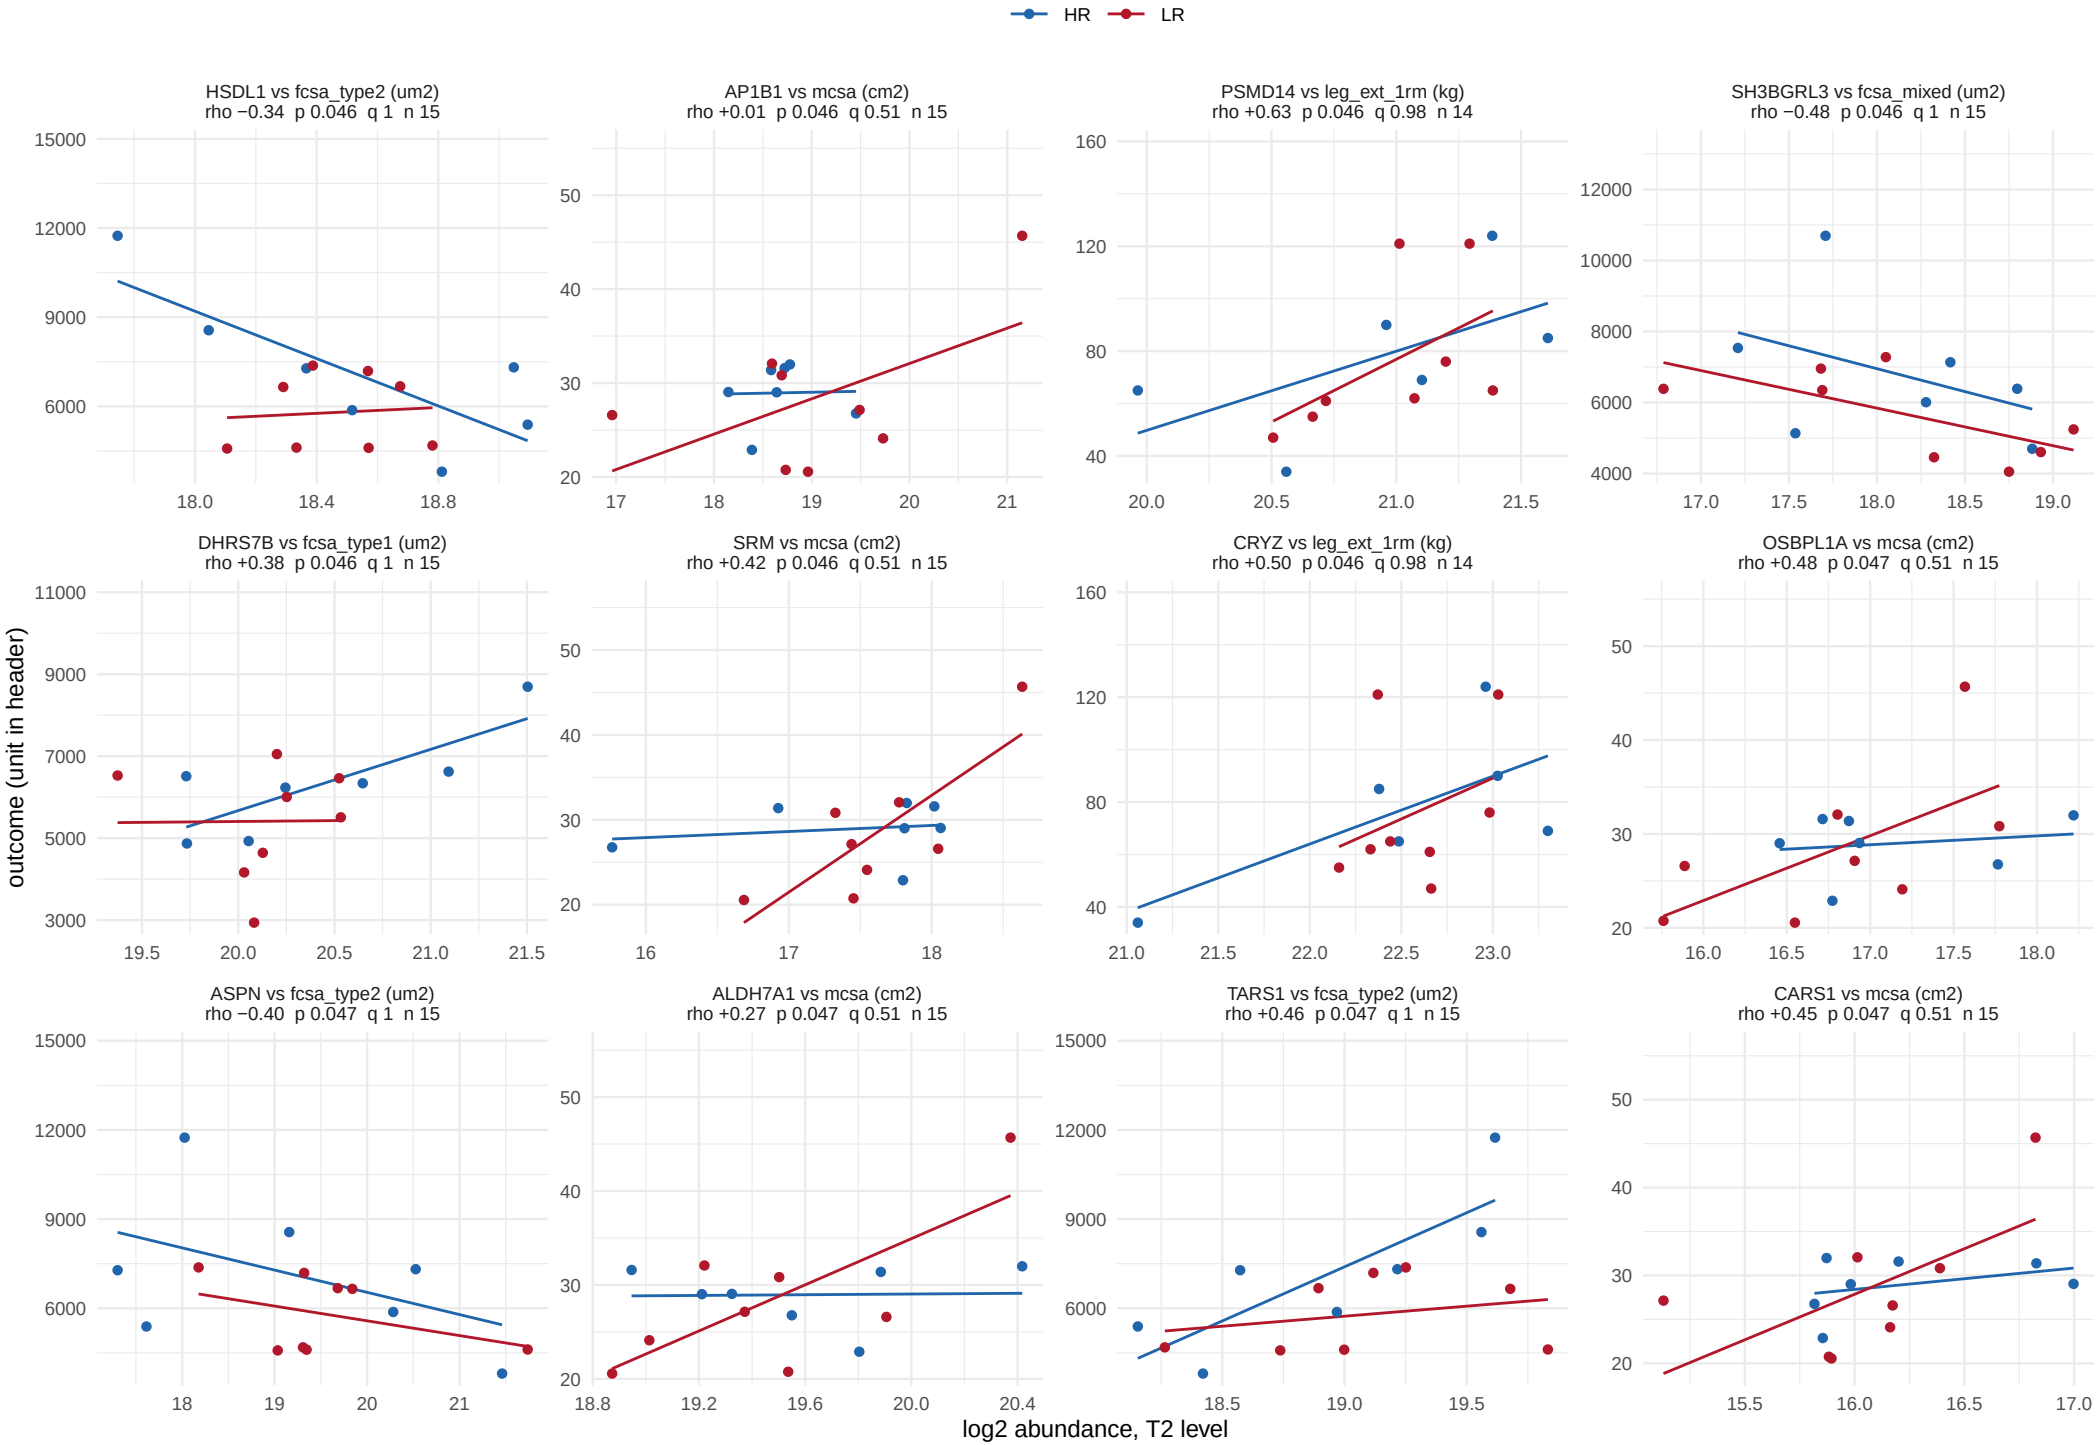

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, post_level window


534 of 11400 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 43 of 45.

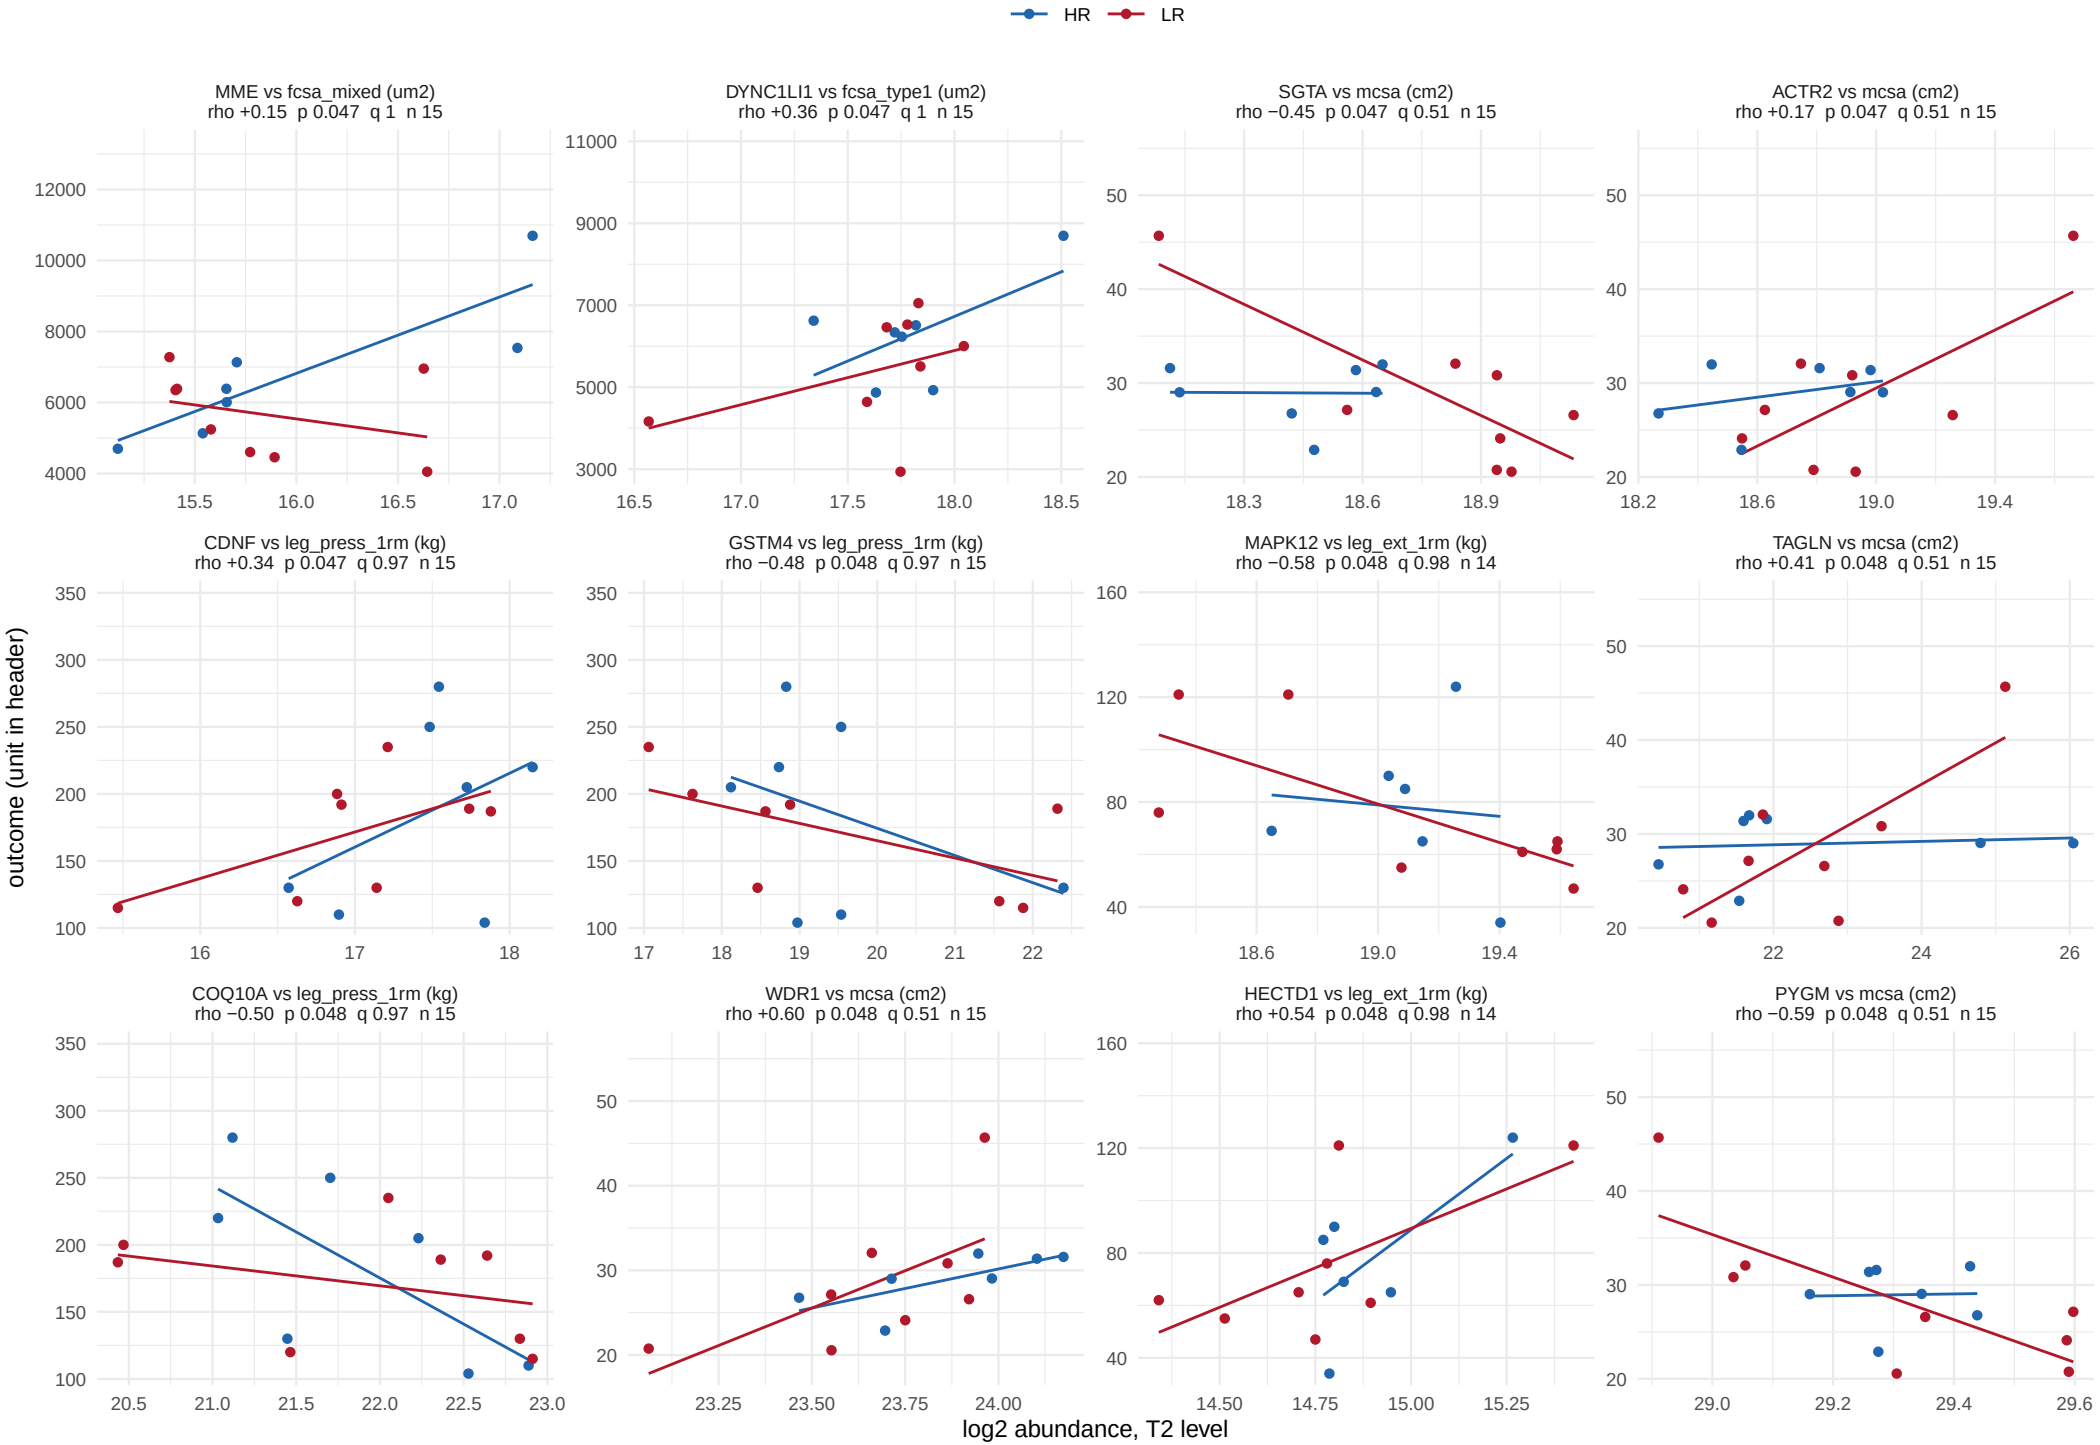

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, post_level window


534 of 11400 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 44 of 45.

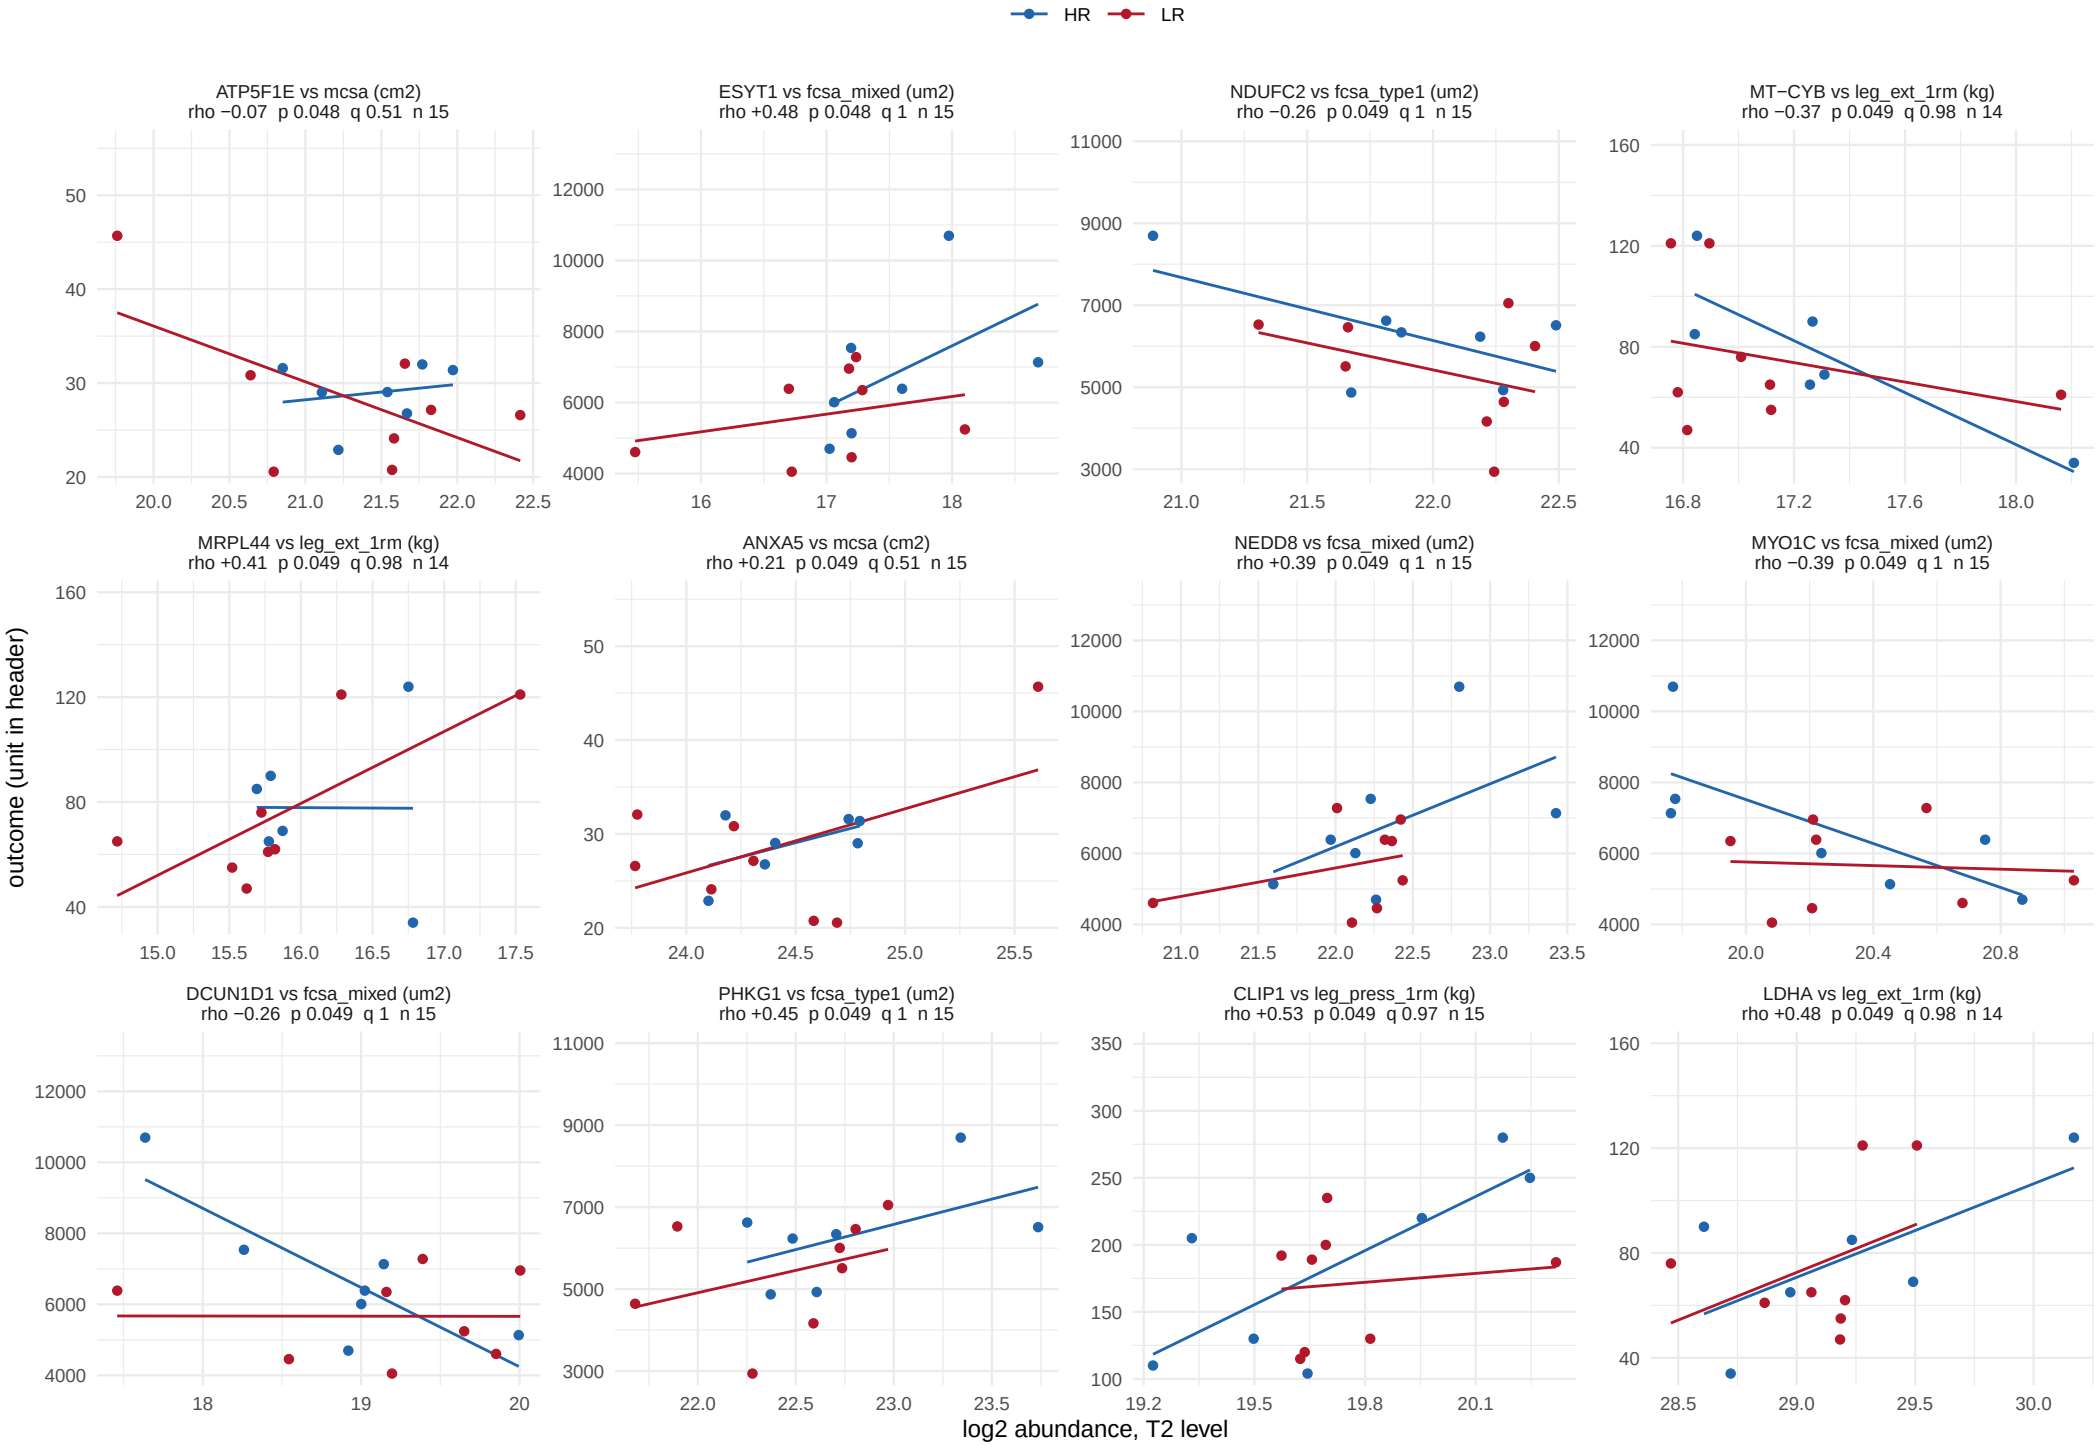

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, post_level window


534 of 11400 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 45 of 45.

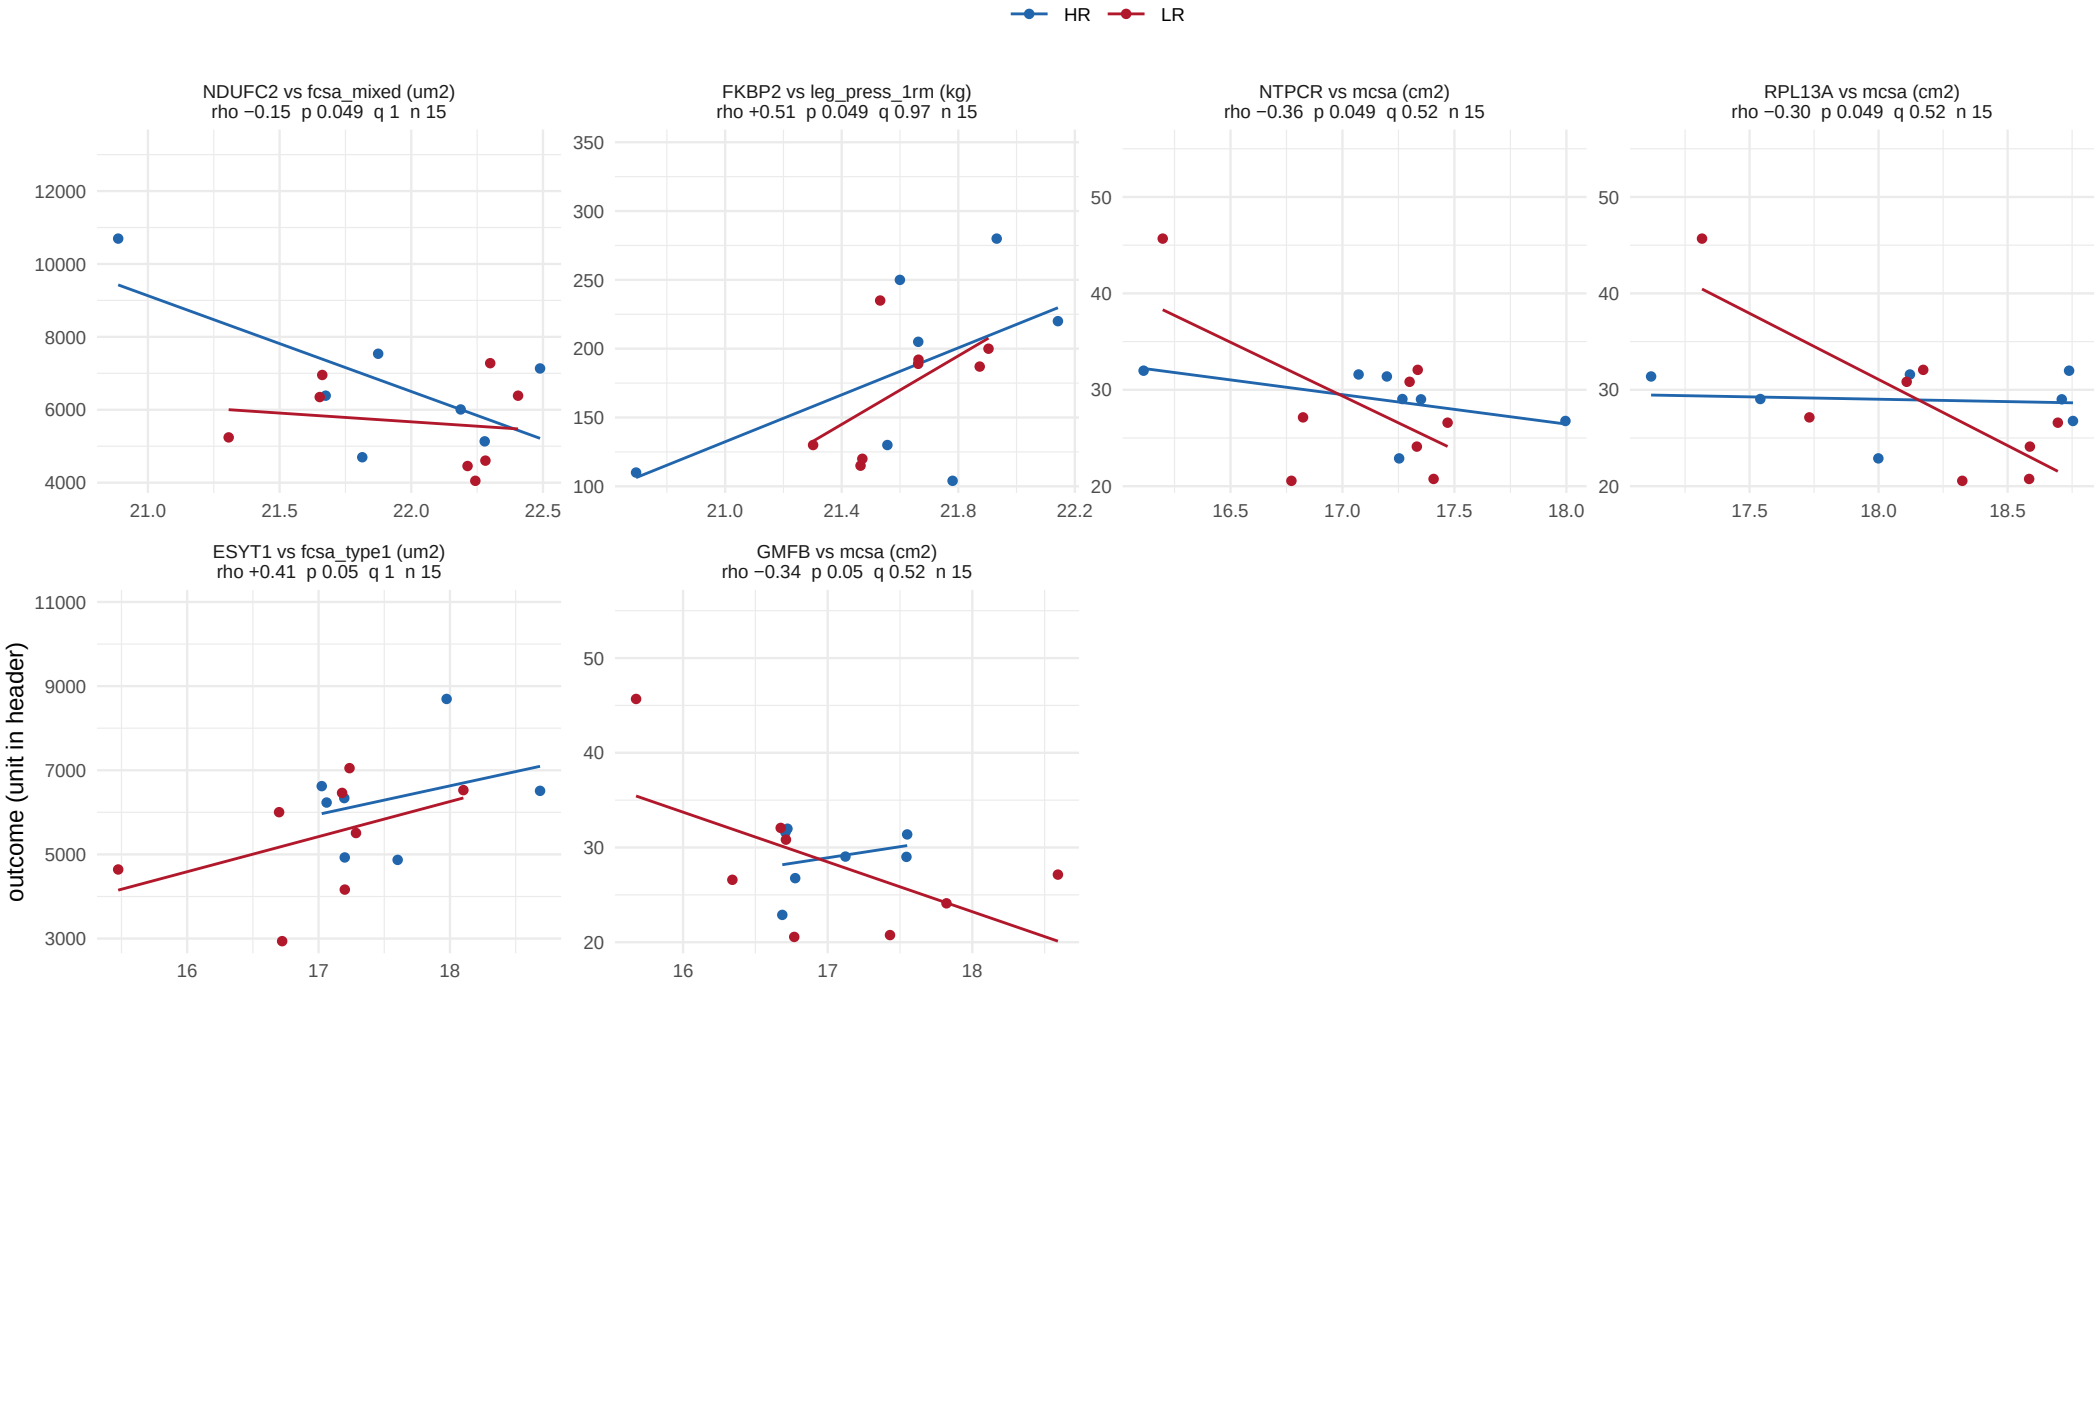

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Arm difference, training window


665 of 13300 feature−outcome pairs at p < 0.05, 11 at BH < 0.05. Page 1 of 56.

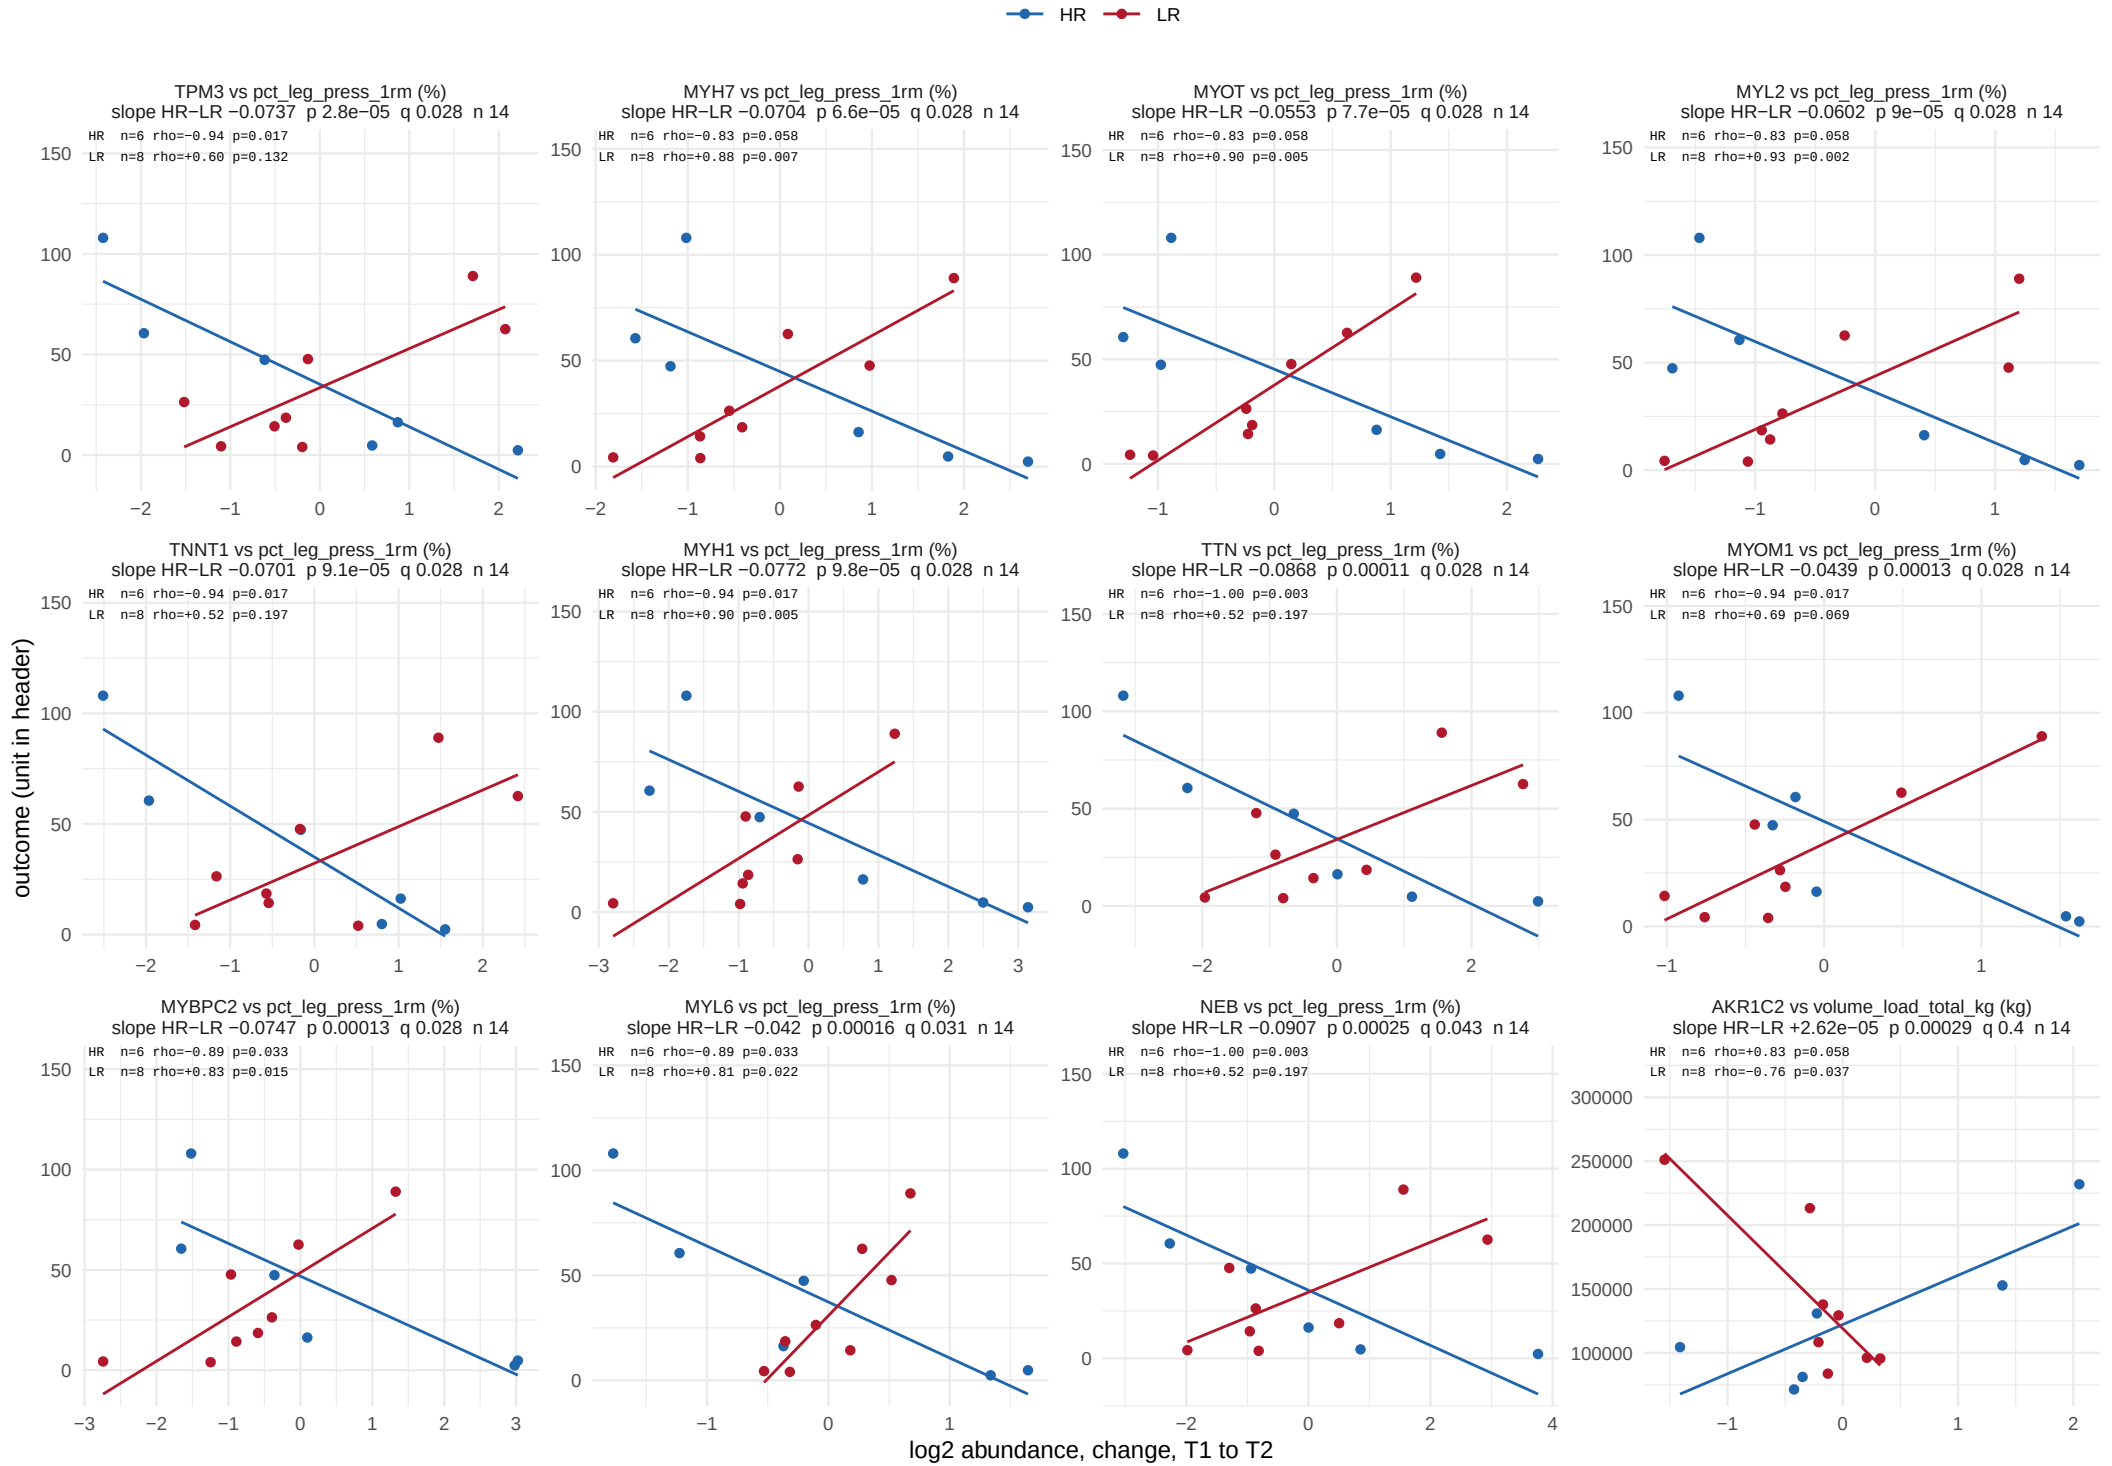

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


665 of 13300 feature−outcome pairs at p < 0.05, 11 at BH < 0.05. Page 2 of 56.

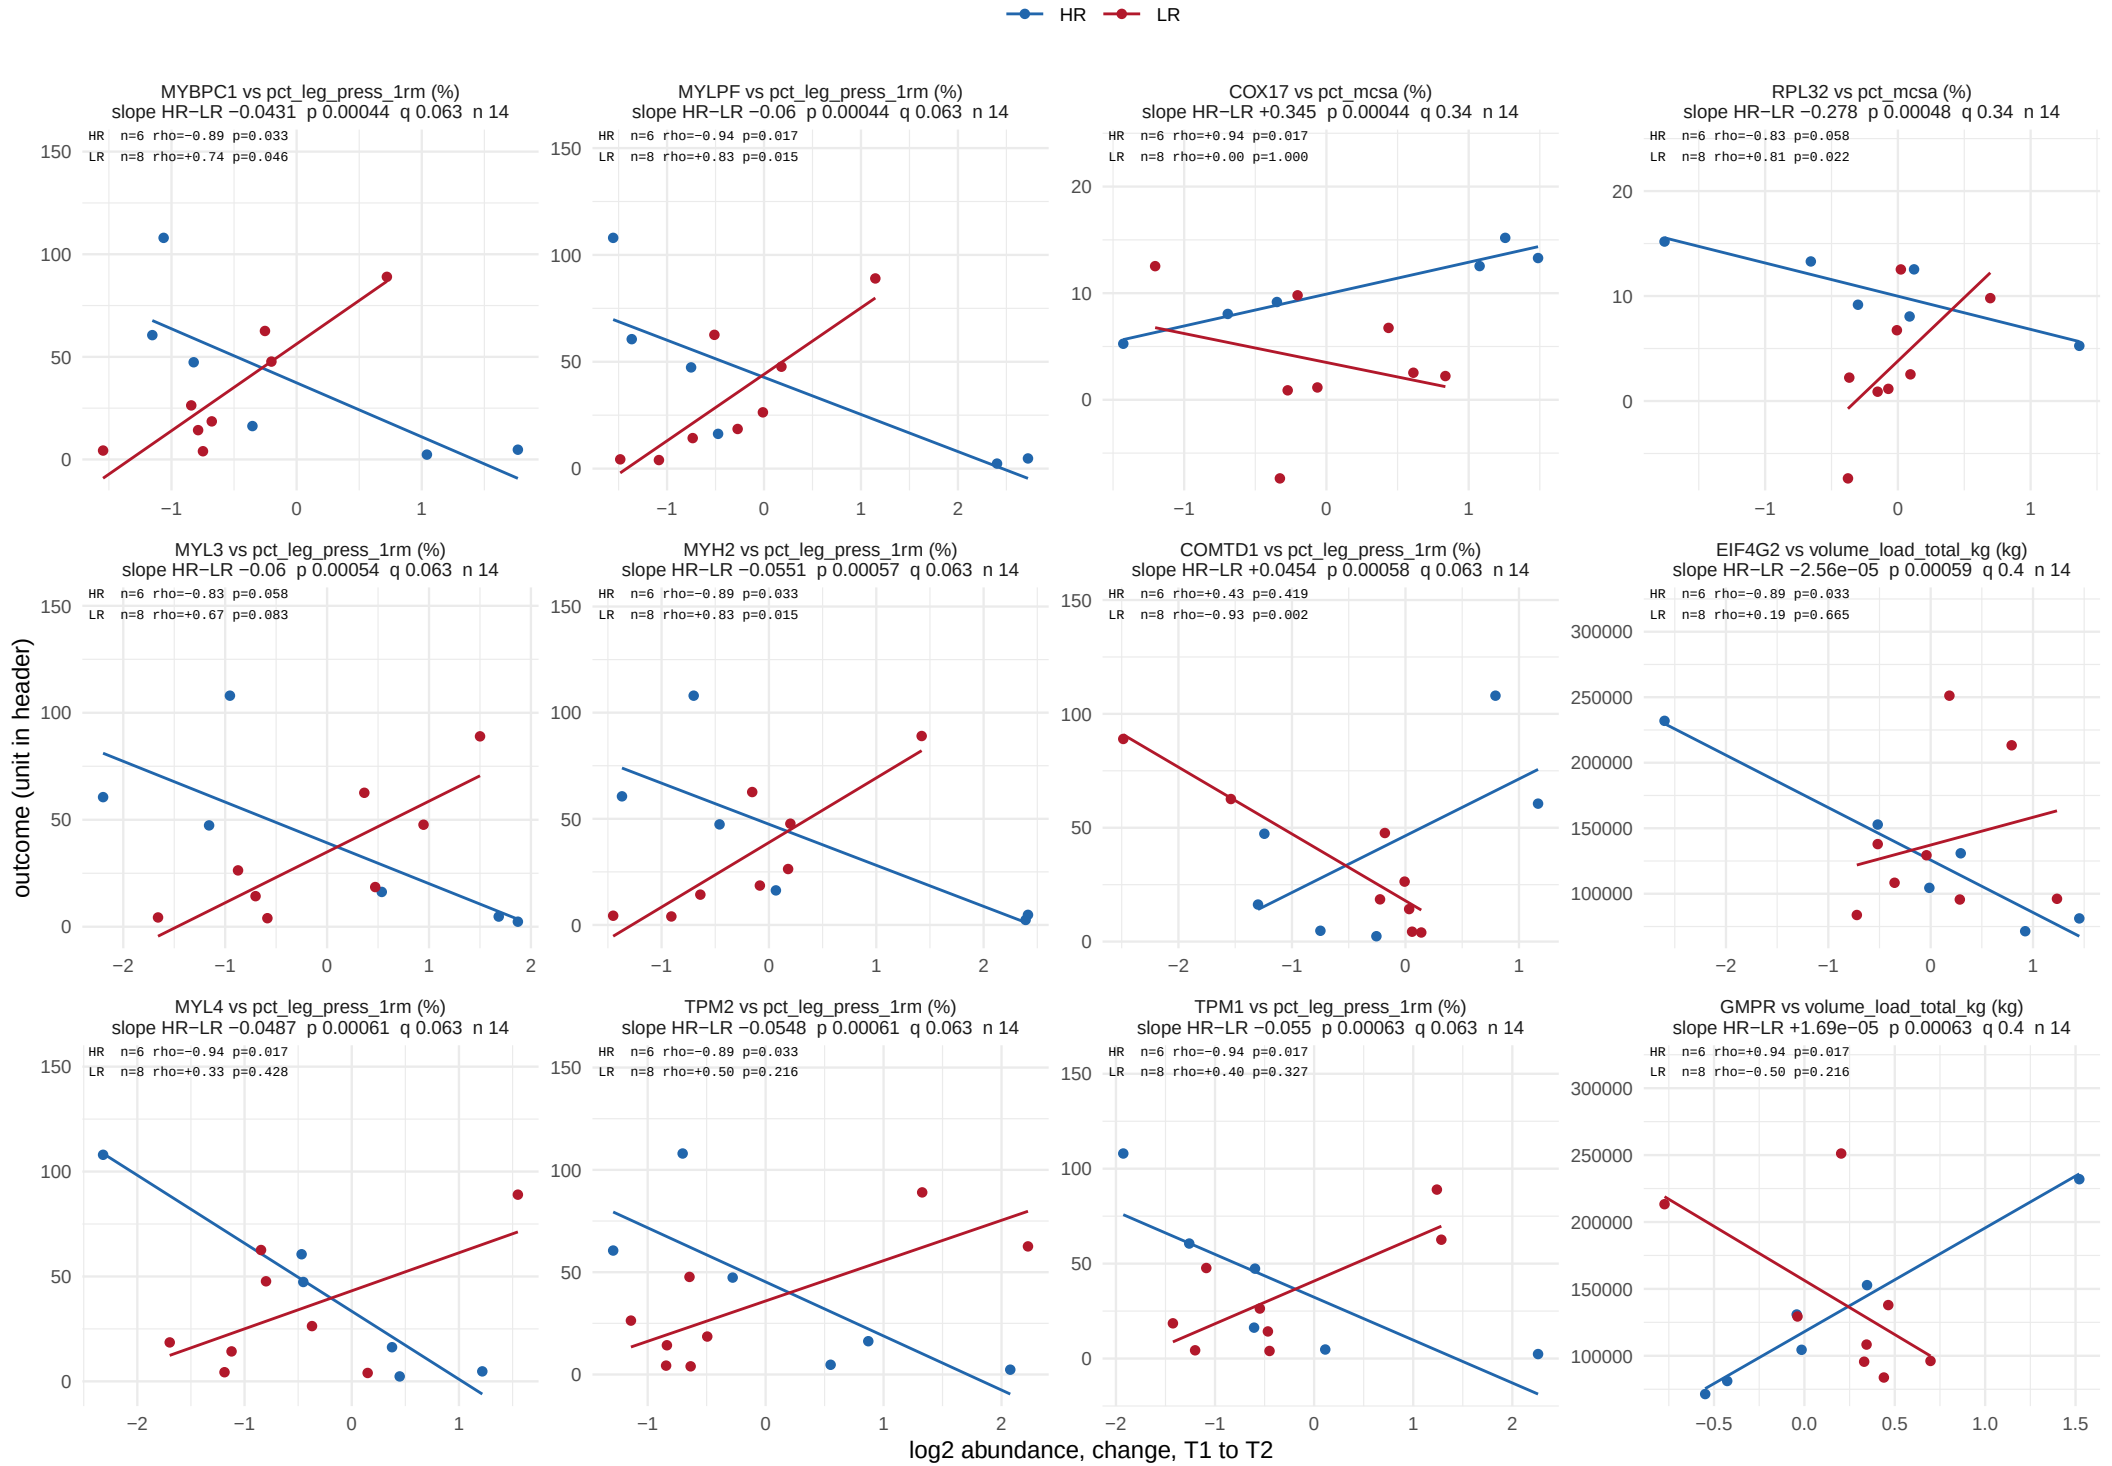

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


665 of 13300 feature−outcome pairs at p < 0.05, 11 at BH < 0.05. Page 3 of 56.

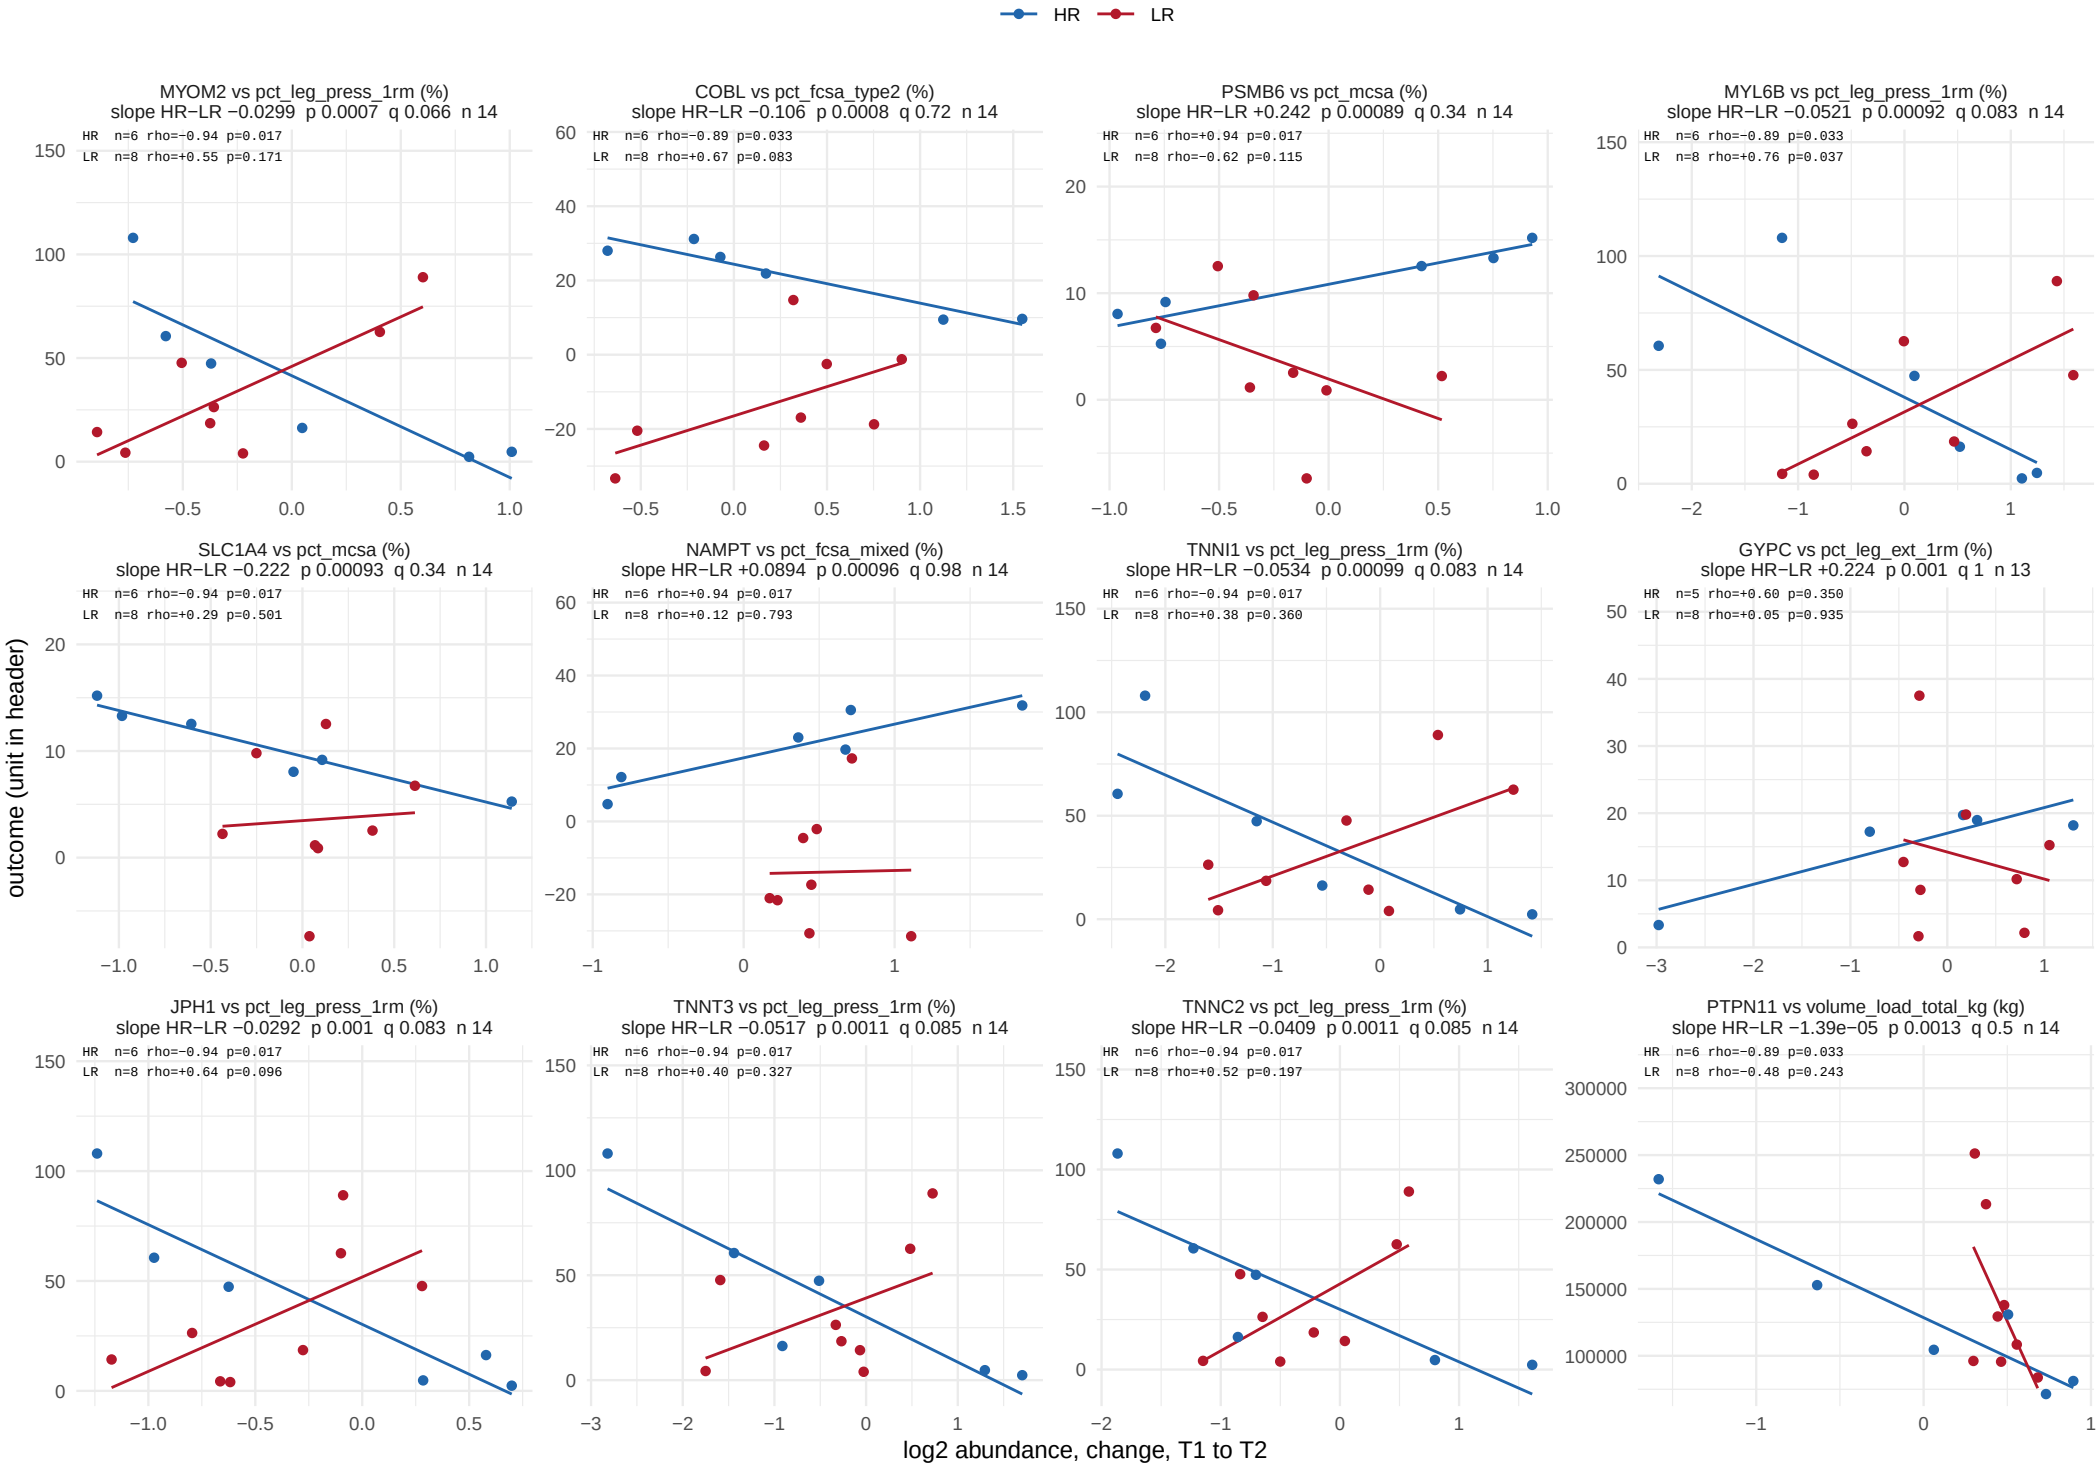

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


665 of 13300 feature−outcome pairs at p < 0.05, 11 at BH < 0.05. Page 4 of 56.

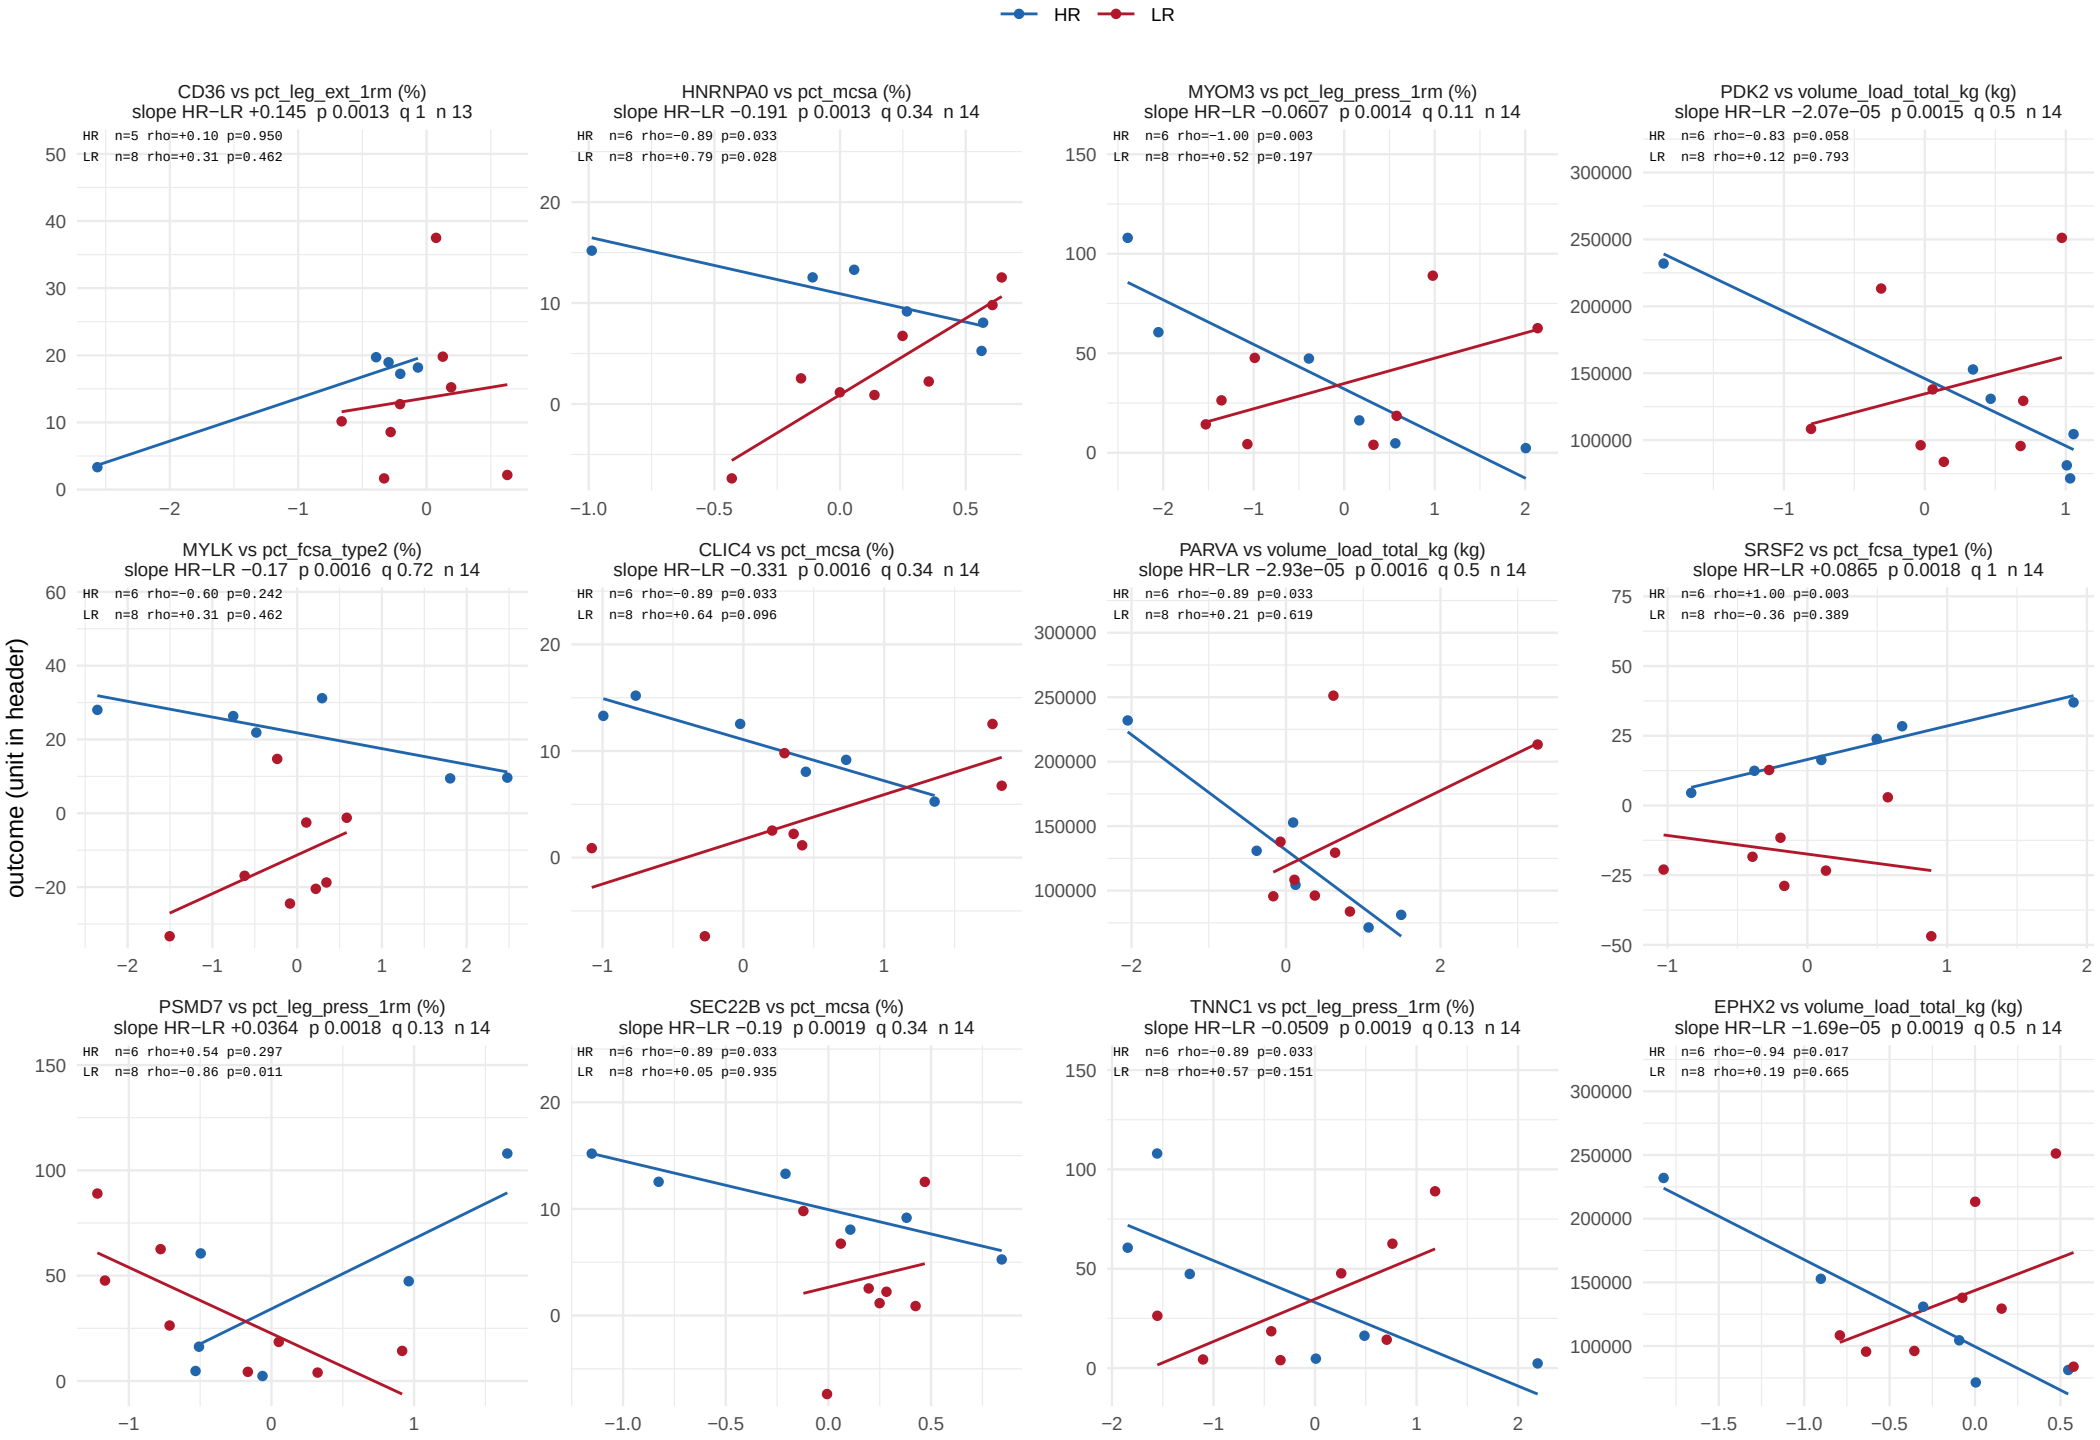

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


665 of 13300 feature−outcome pairs at p < 0.05, 11 at BH < 0.05. Page 5 of 56.

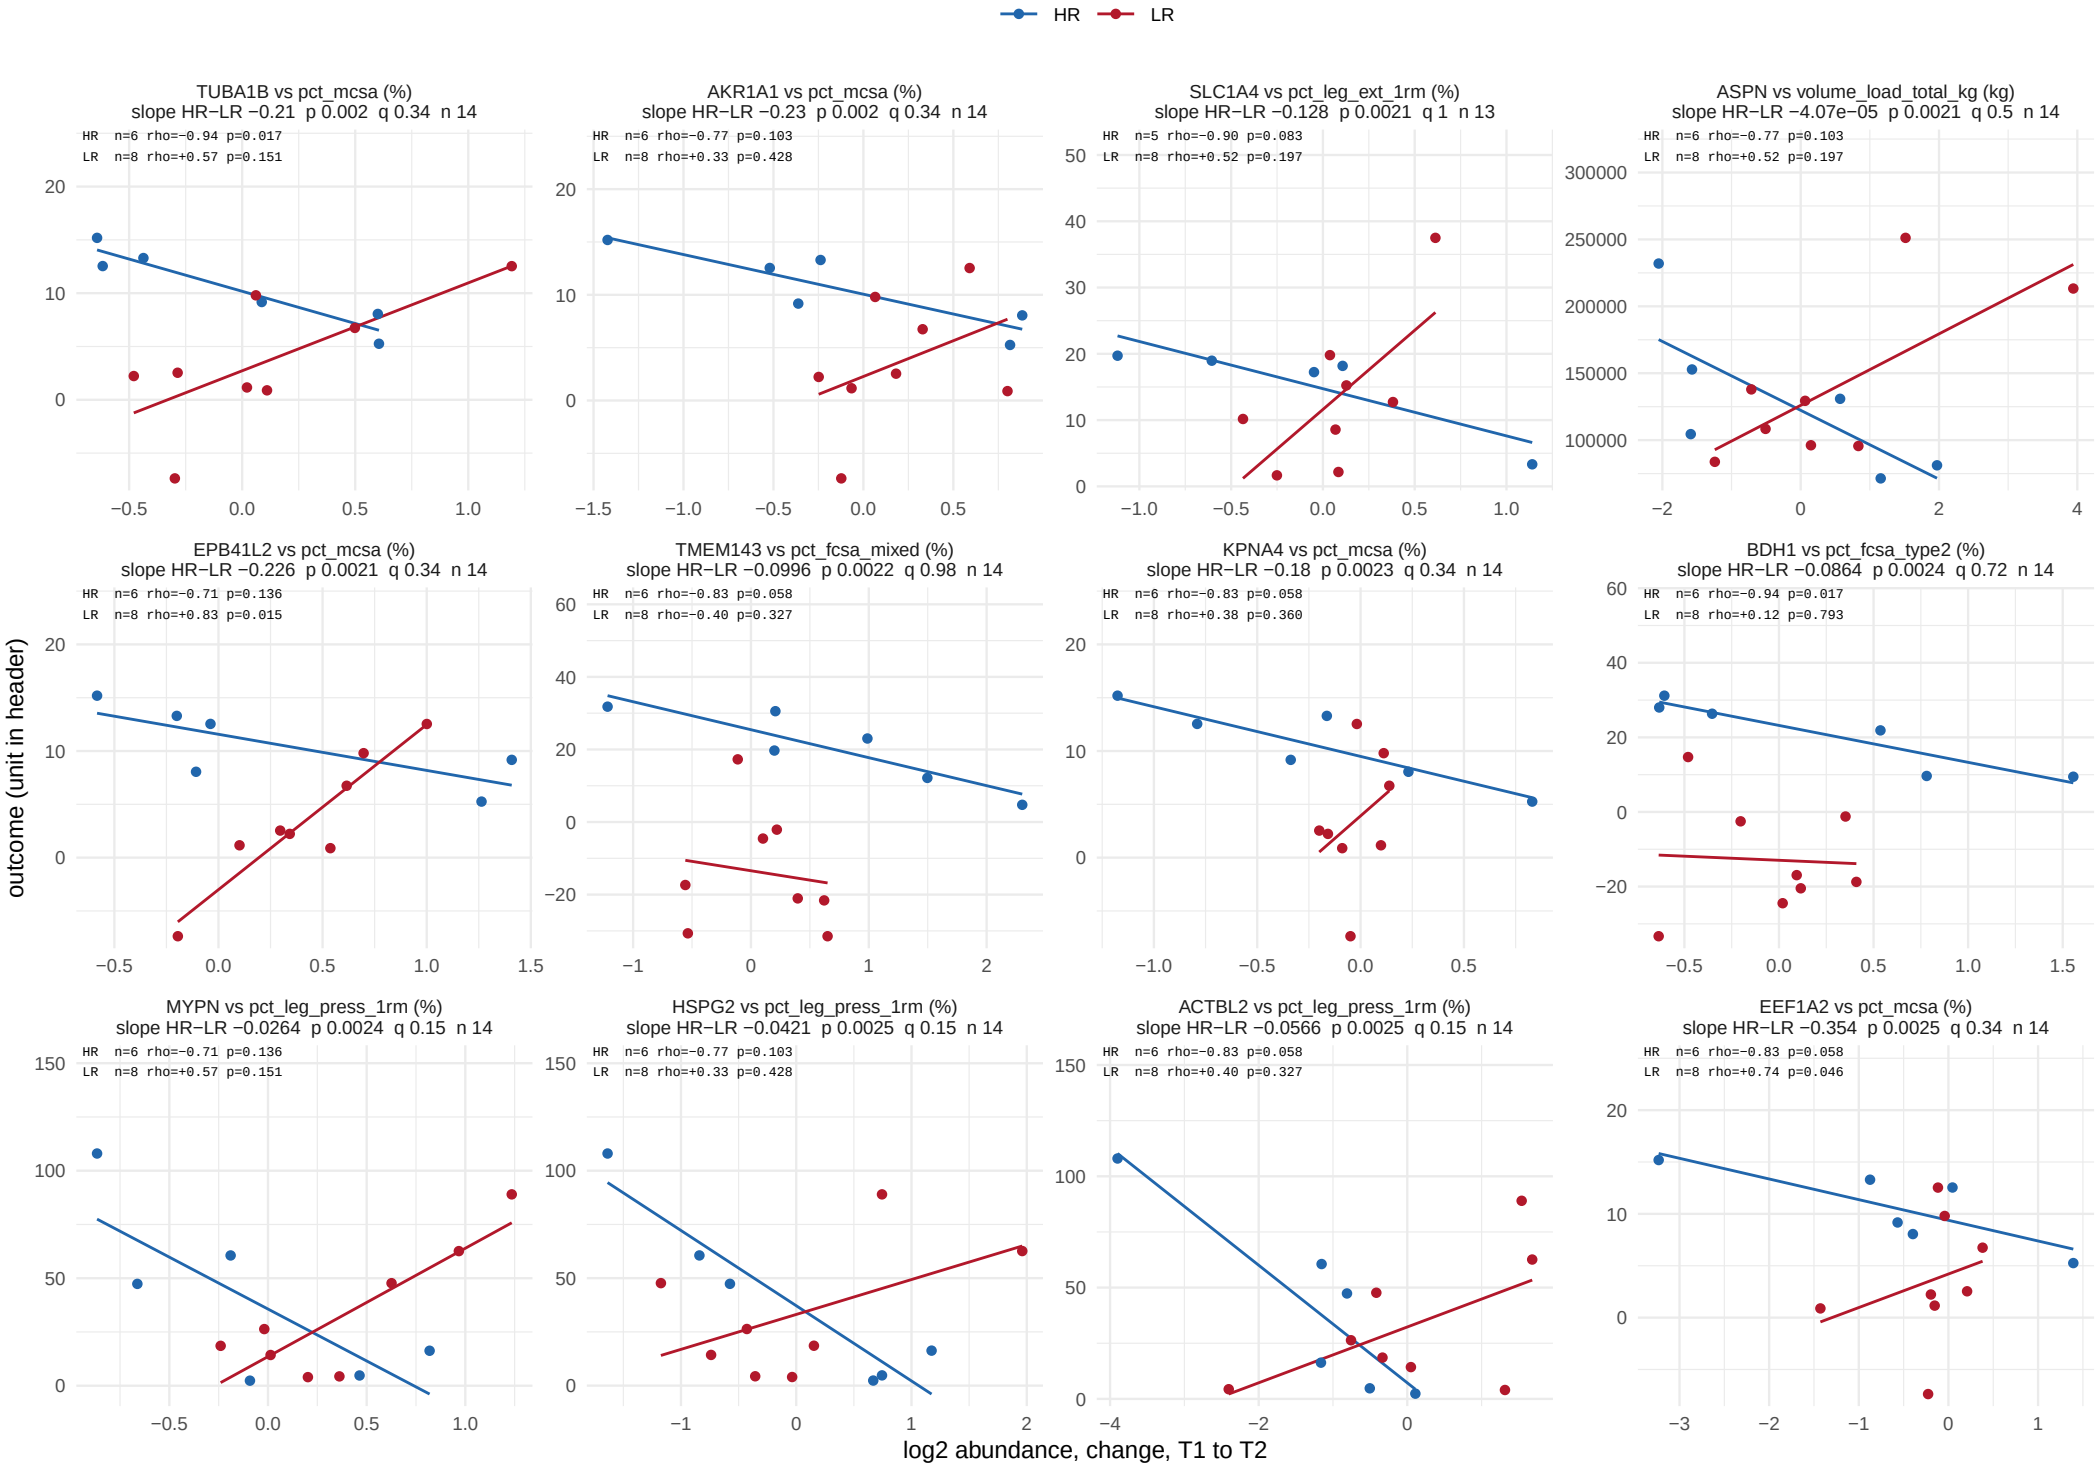

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


665 of 13300 feature−outcome pairs at p < 0.05, 11 at BH < 0.05. Page 6 of 56.

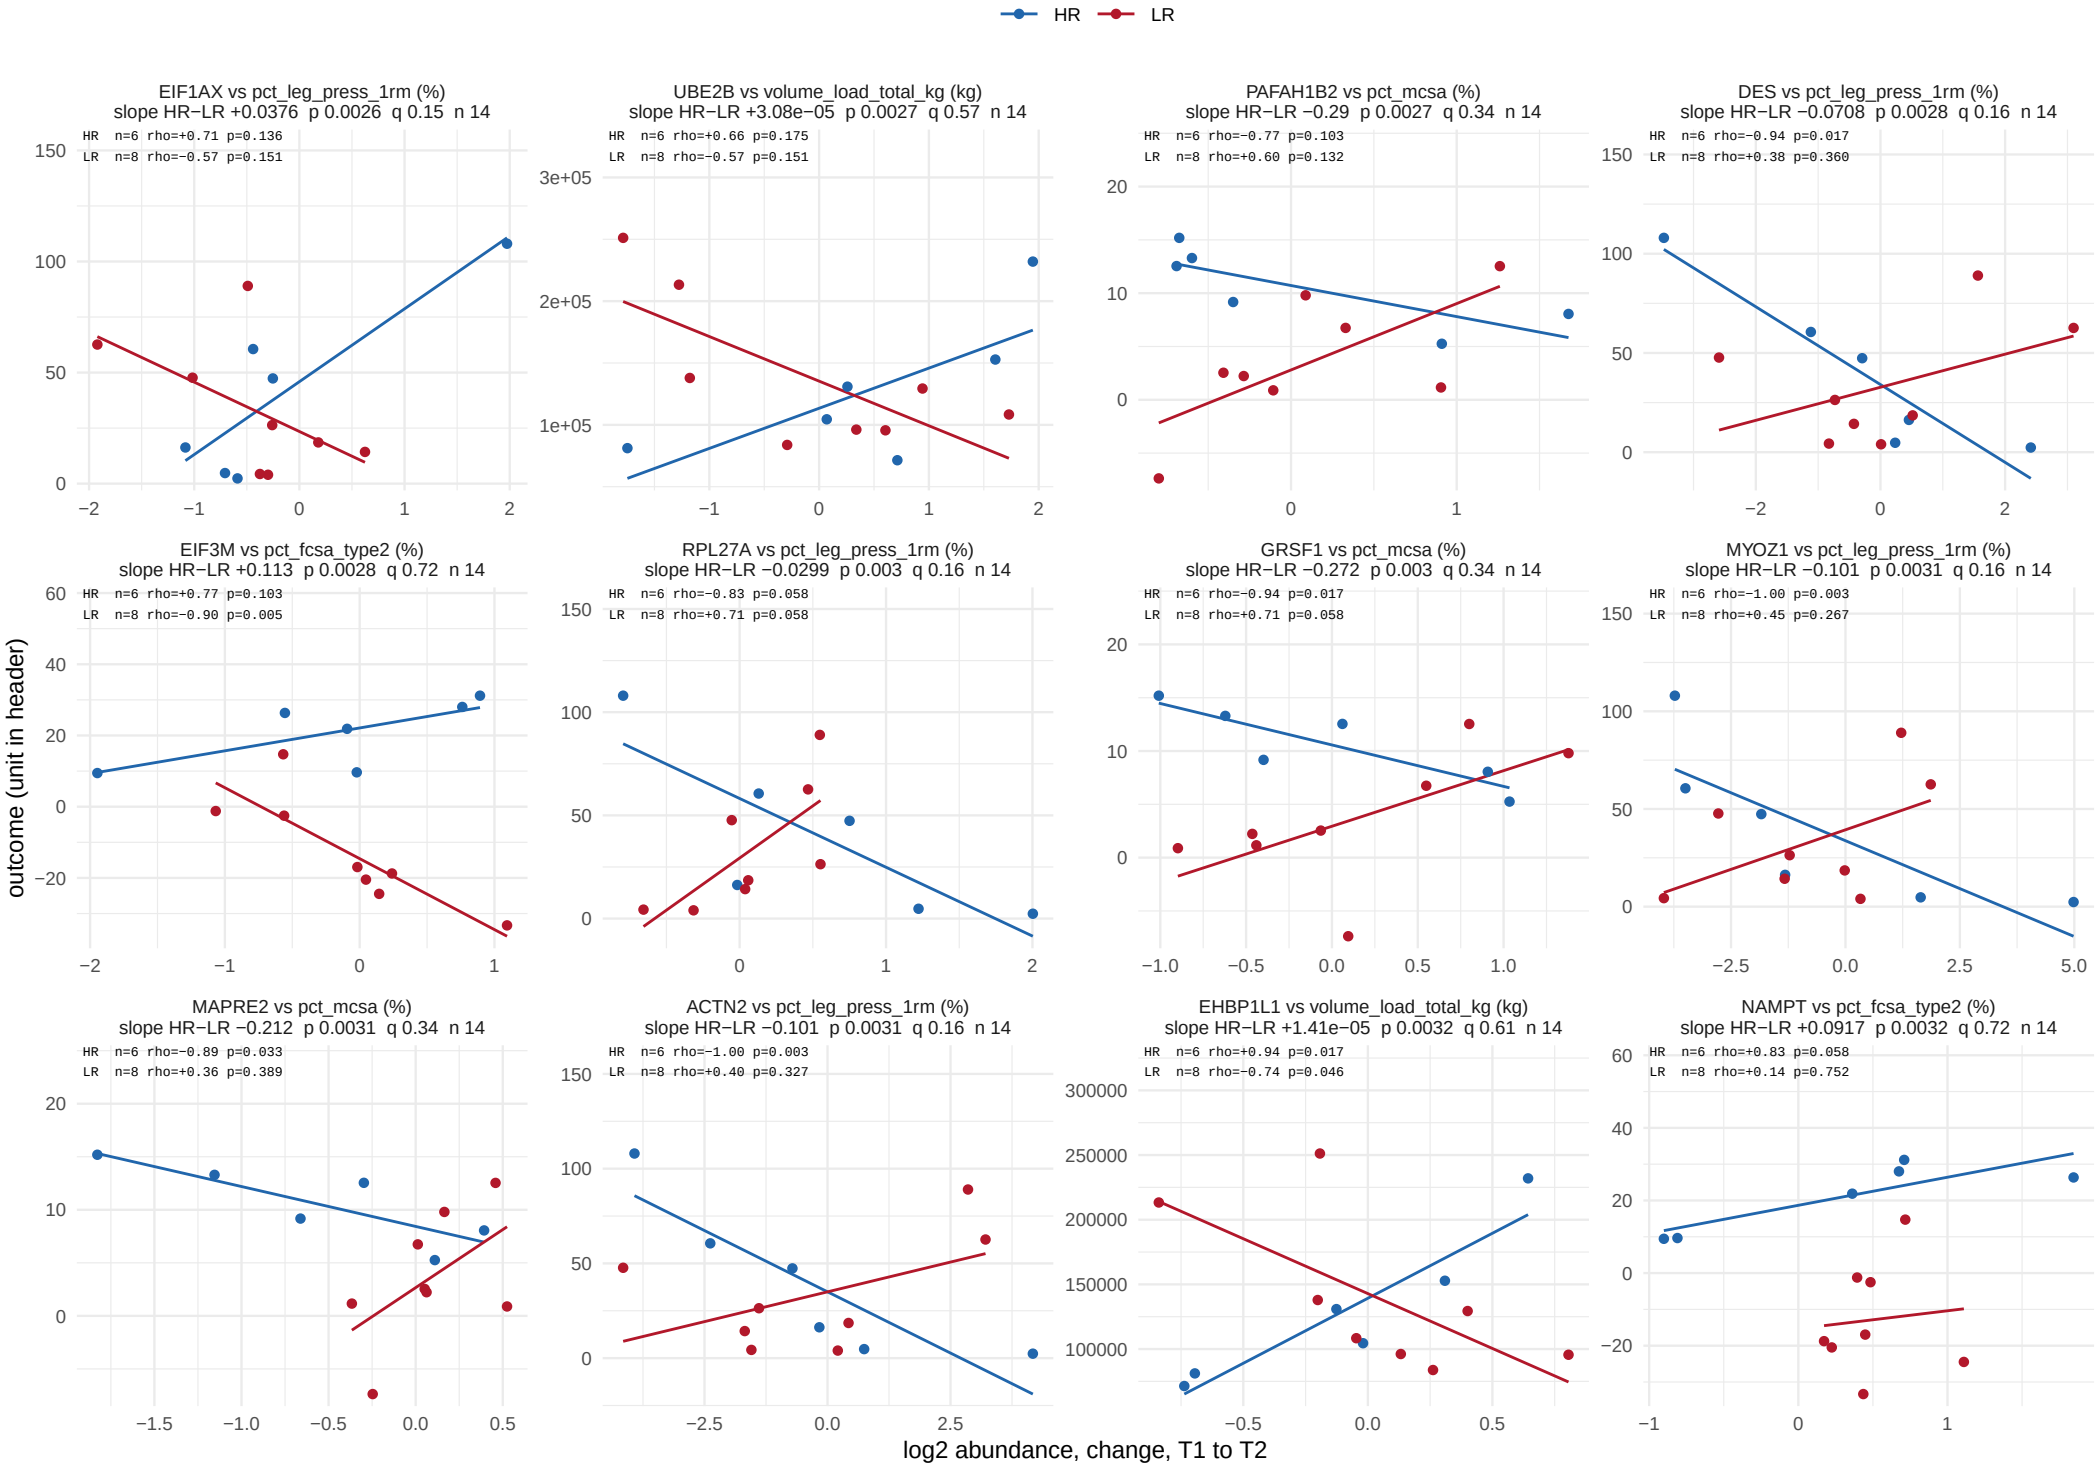

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


665 of 13300 feature−outcome pairs at p < 0.05, 11 at BH < 0.05. Page 7 of 56.

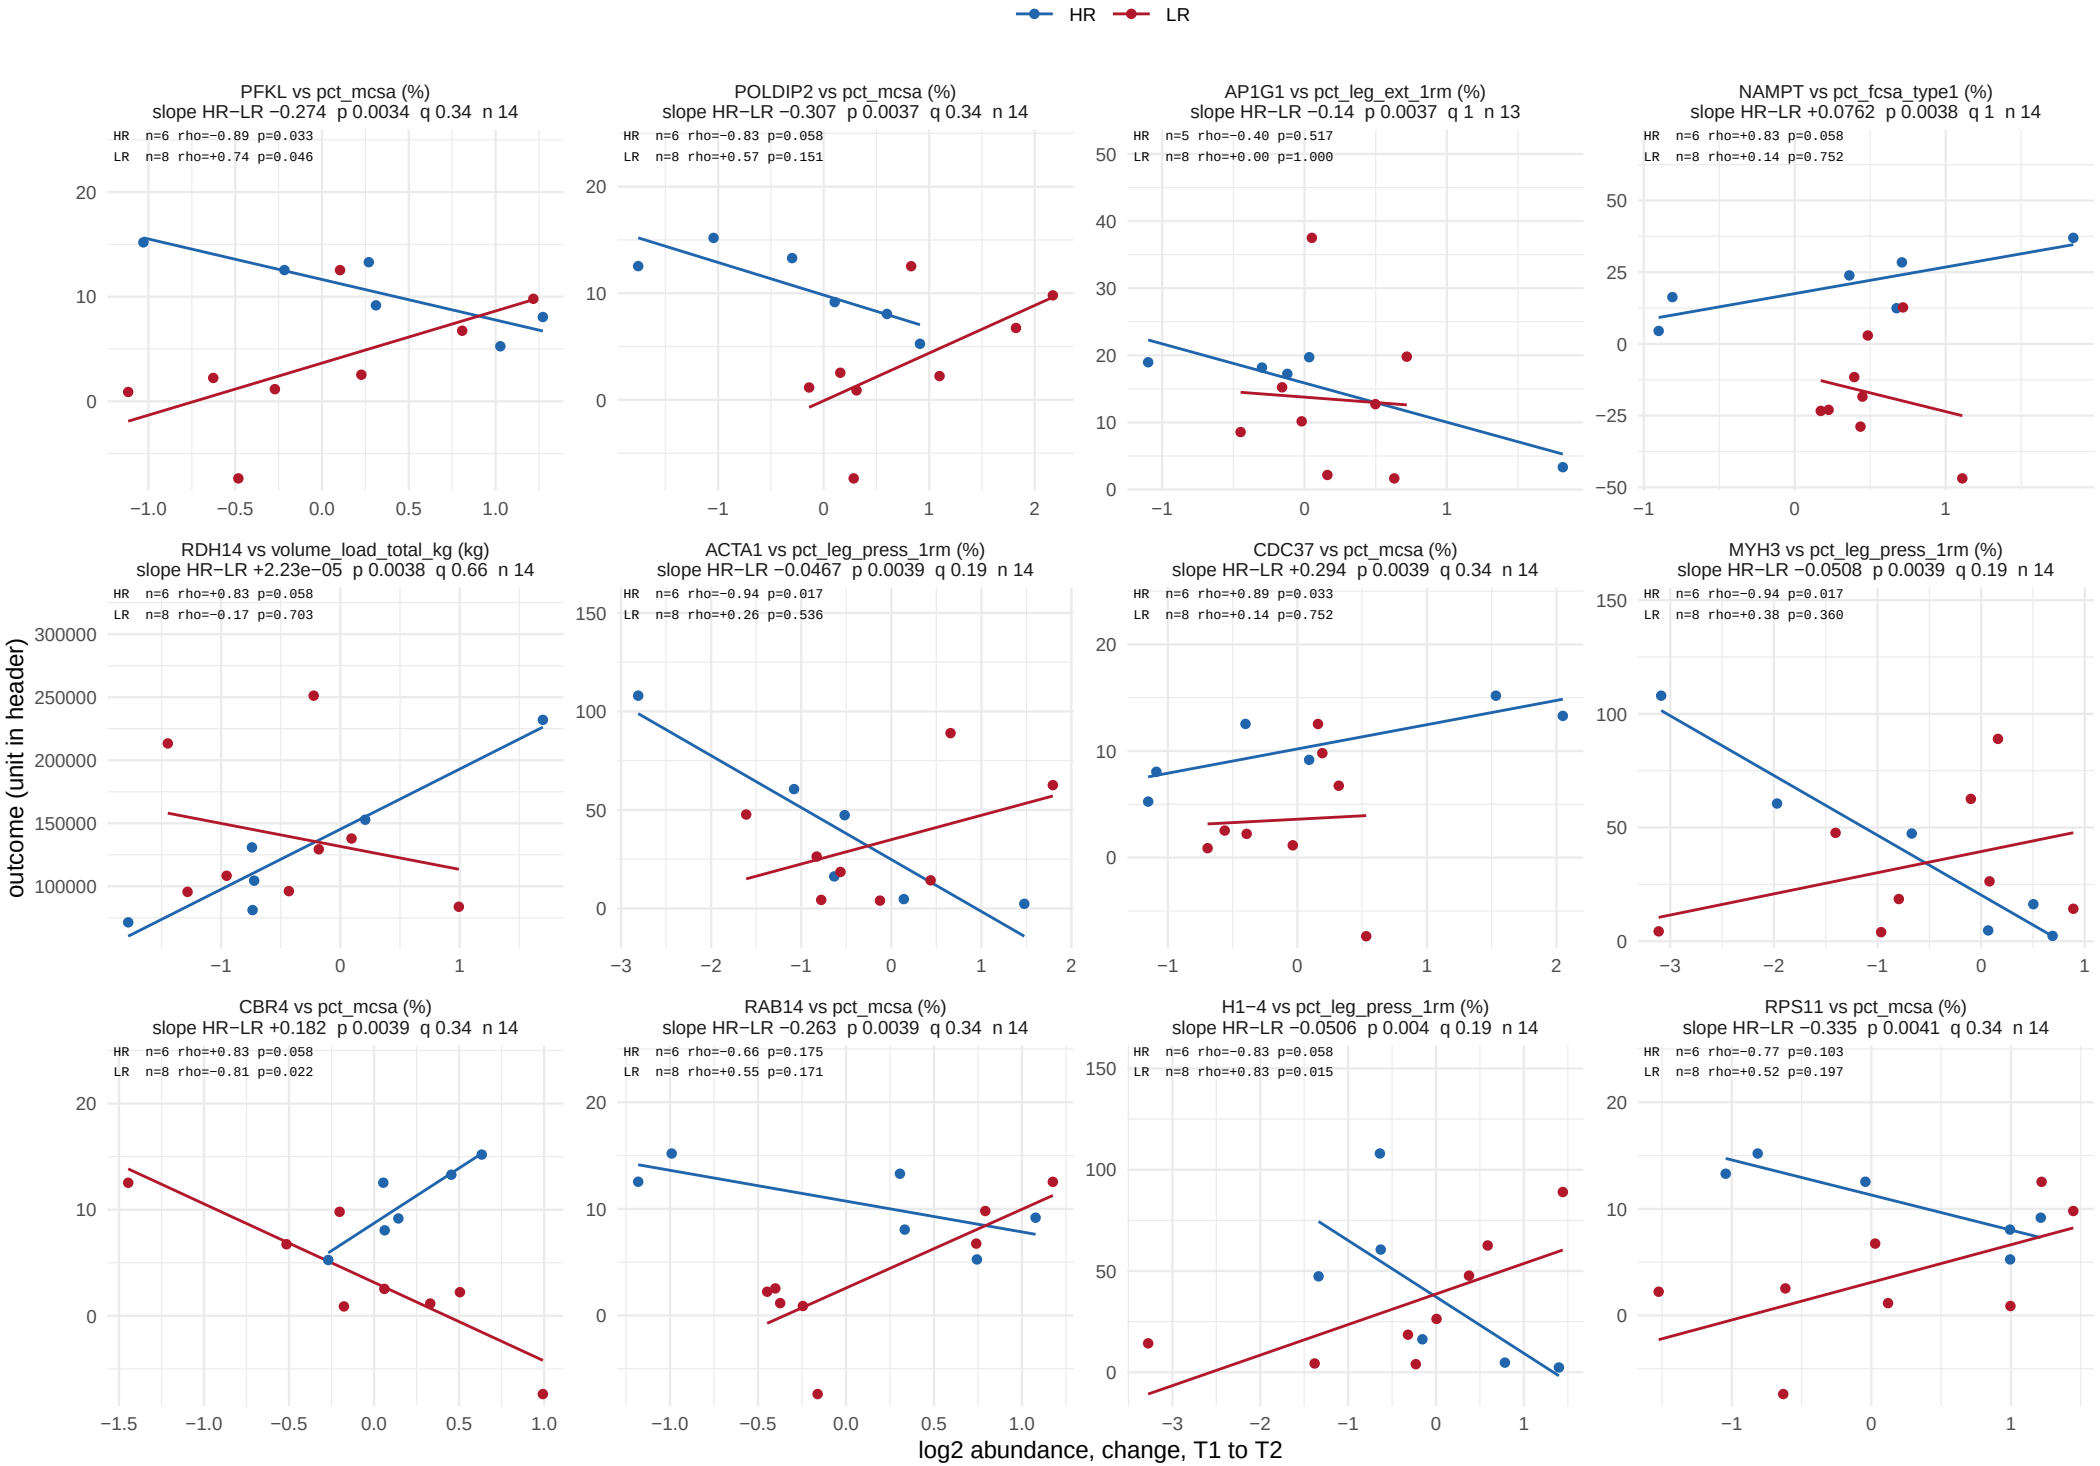

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


665 of 13300 feature−outcome pairs at p < 0.05, 11 at BH < 0.05. Page 8 of 56.

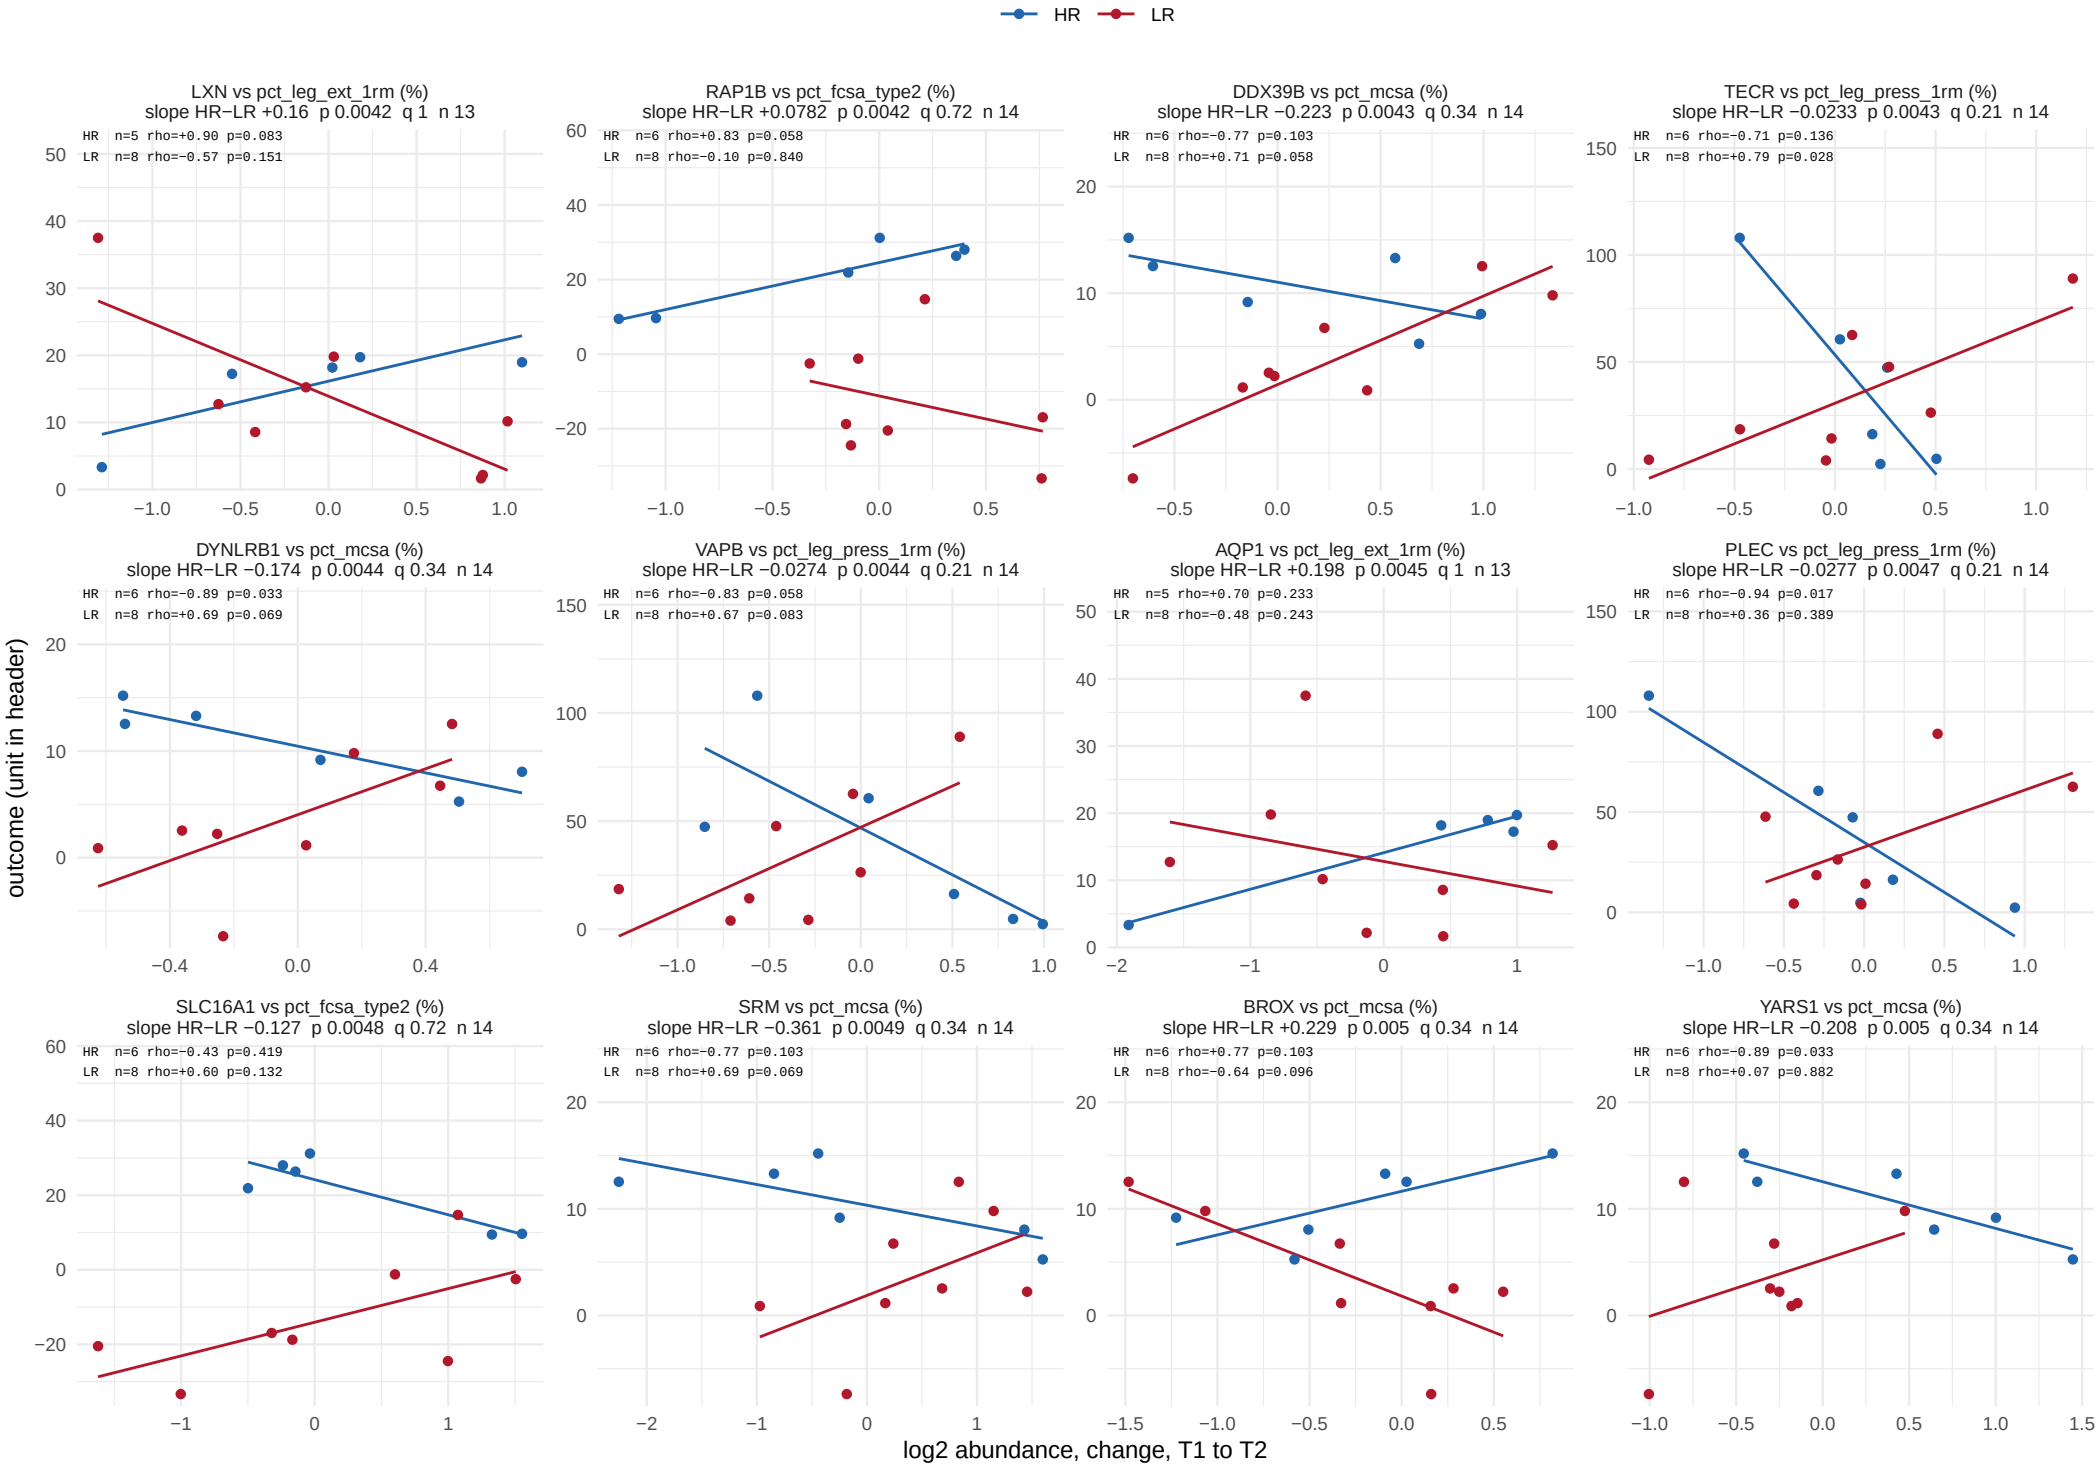

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


665 of 13300 feature−outcome pairs at p < 0.05, 11 at BH < 0.05. Page 9 of 56.

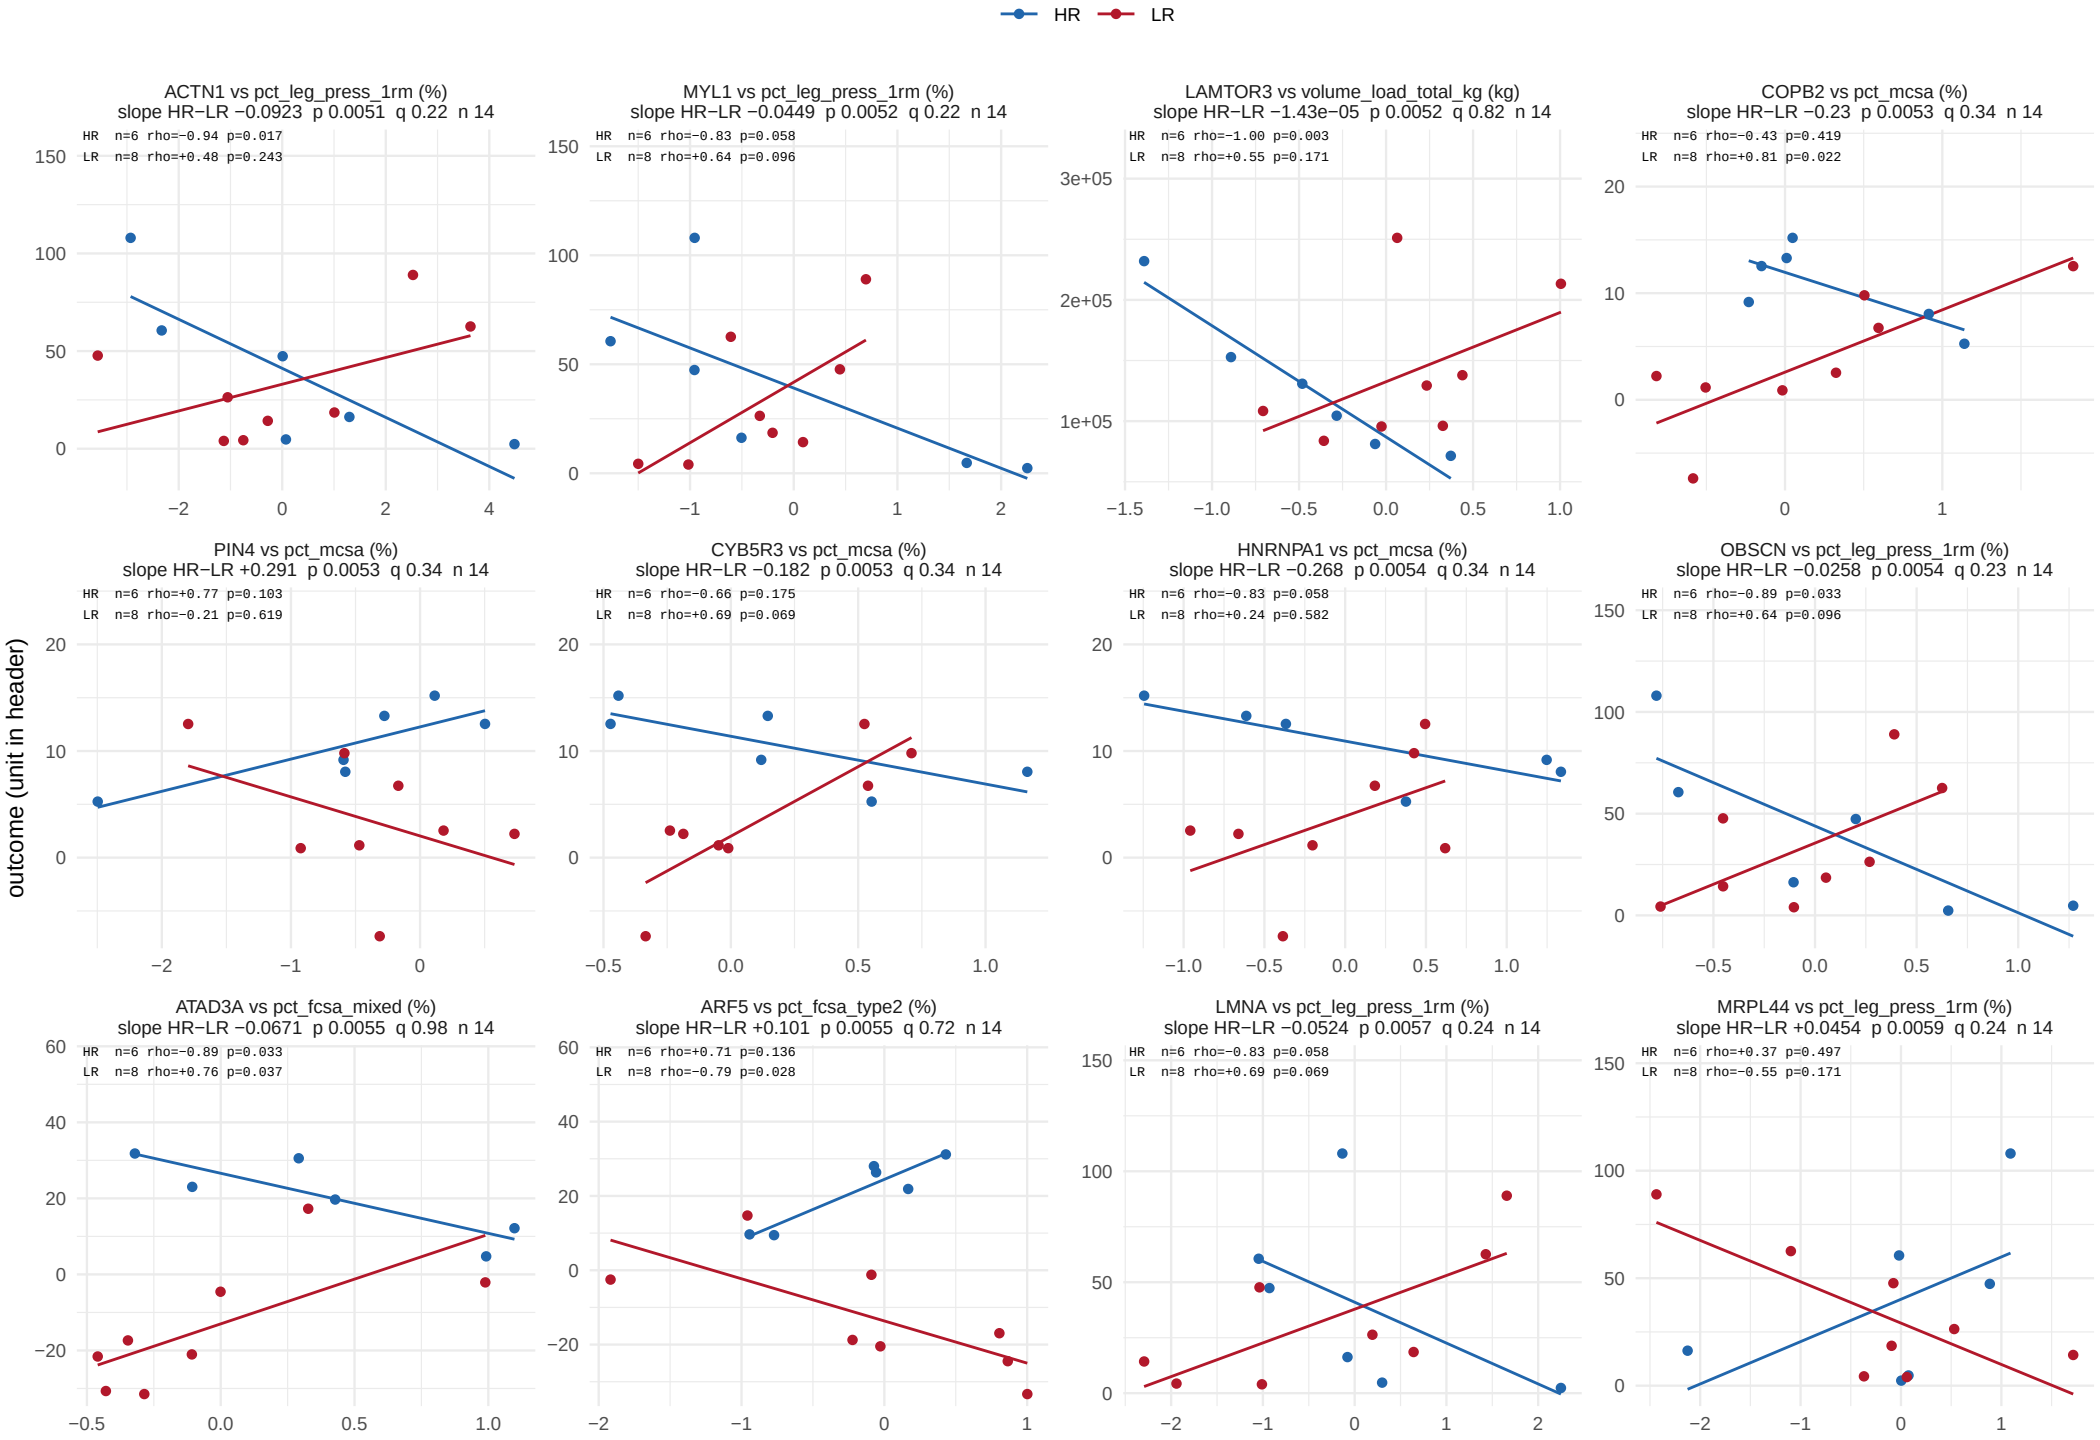

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


665 of 13300 feature−outcome pairs at p < 0.05, 11 at BH < 0.05. Page 10 of 56.

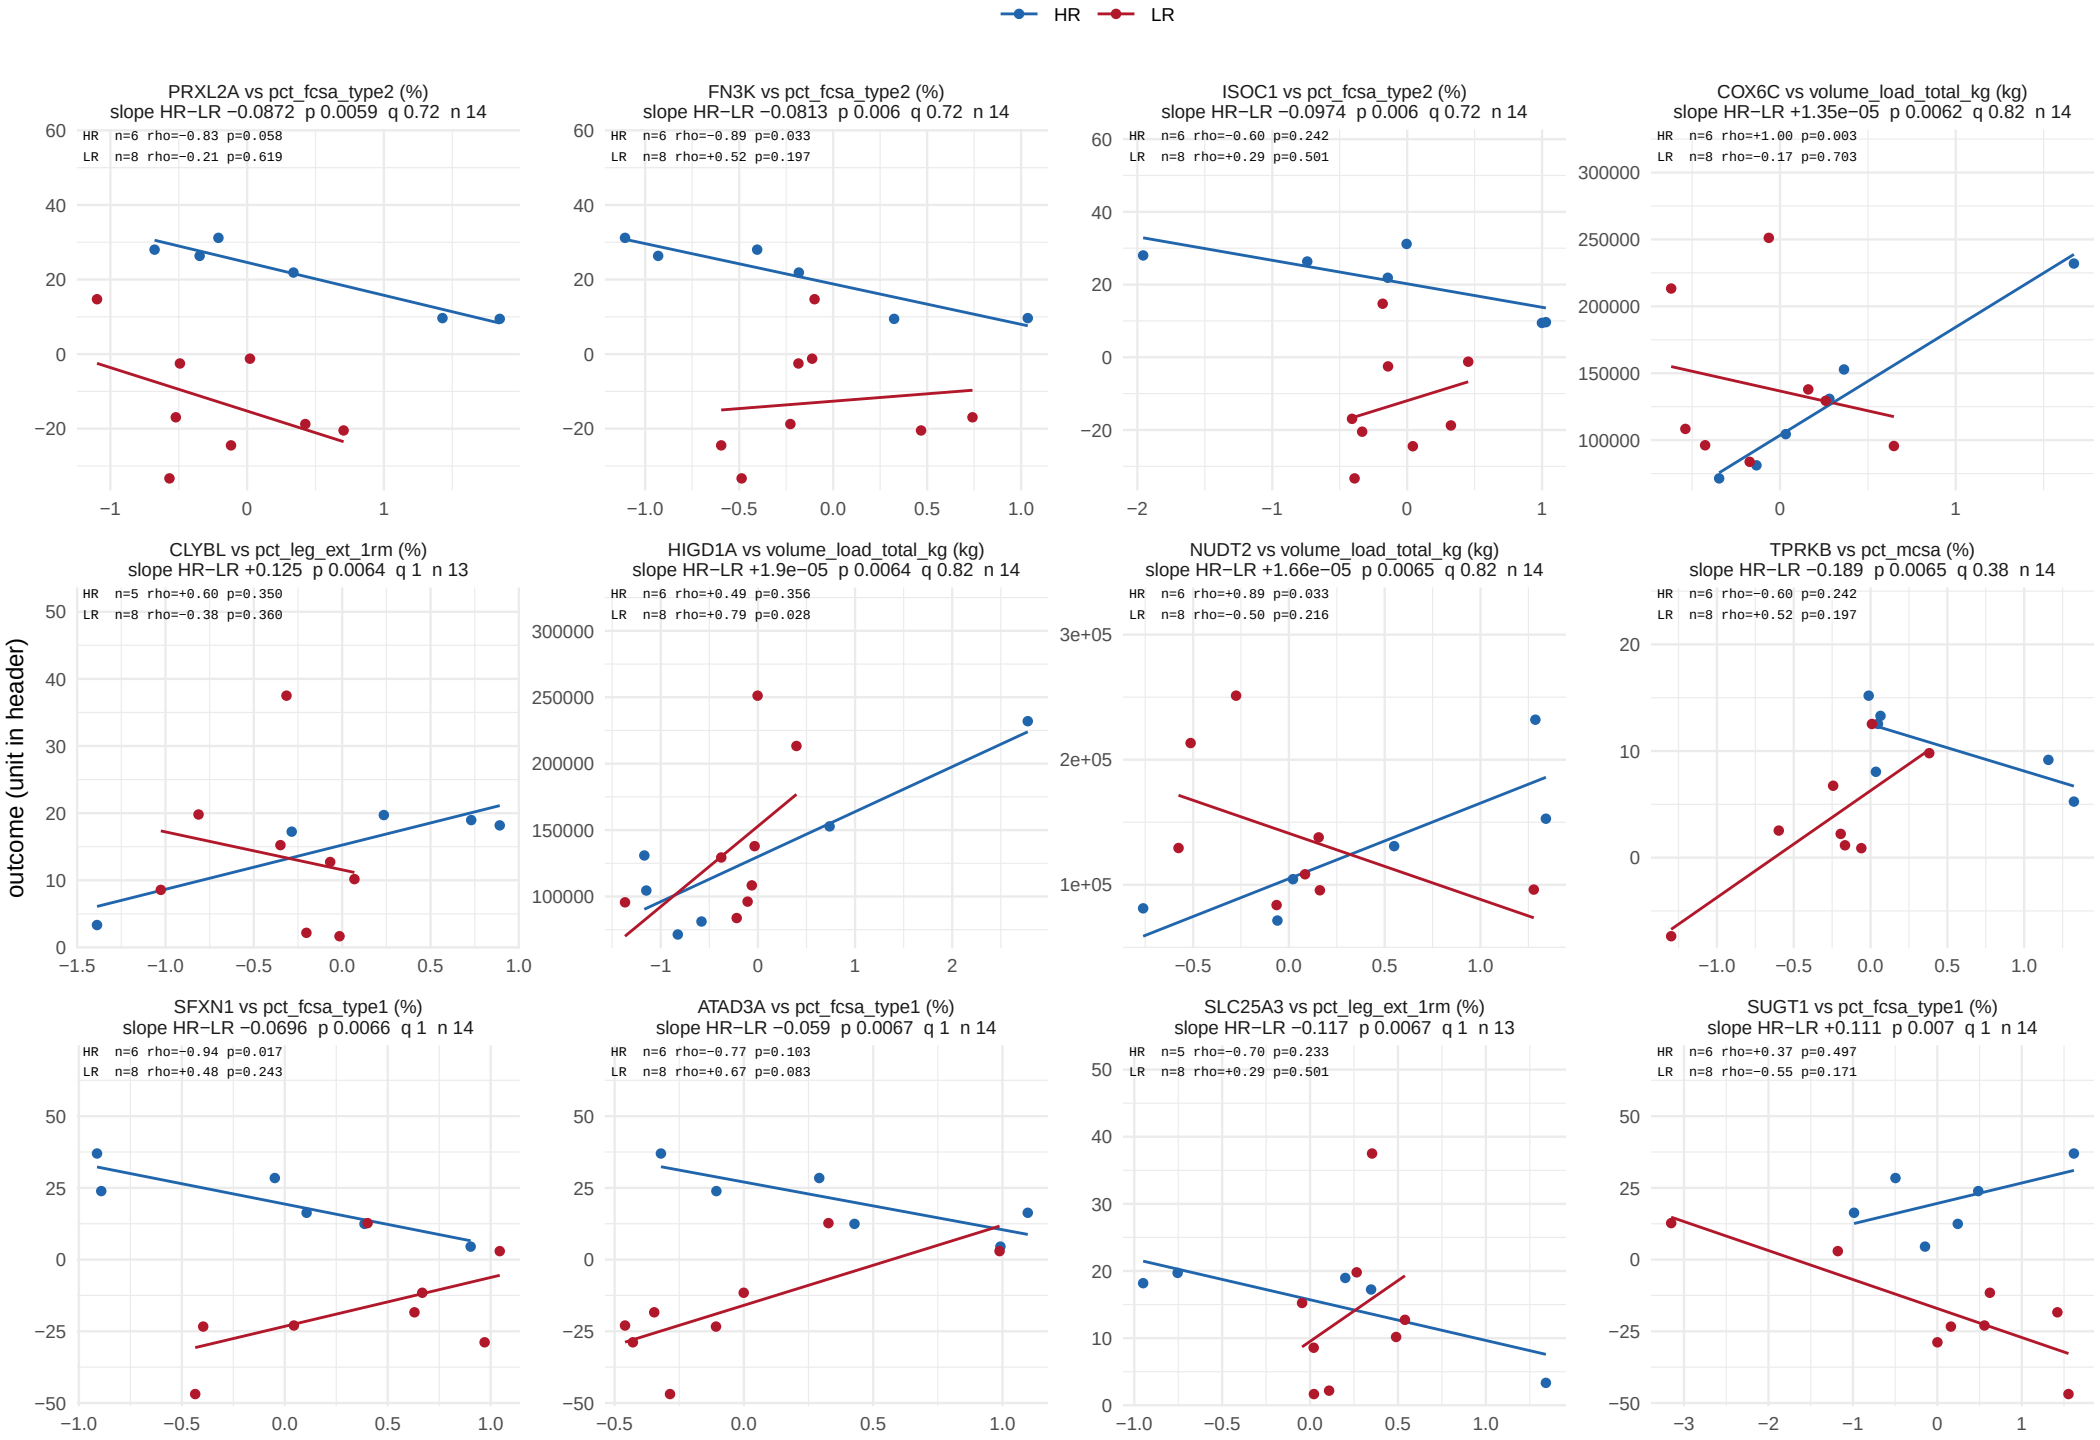

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


665 of 13300 feature−outcome pairs at p < 0.05, 11 at BH < 0.05. Page 11 of 56.

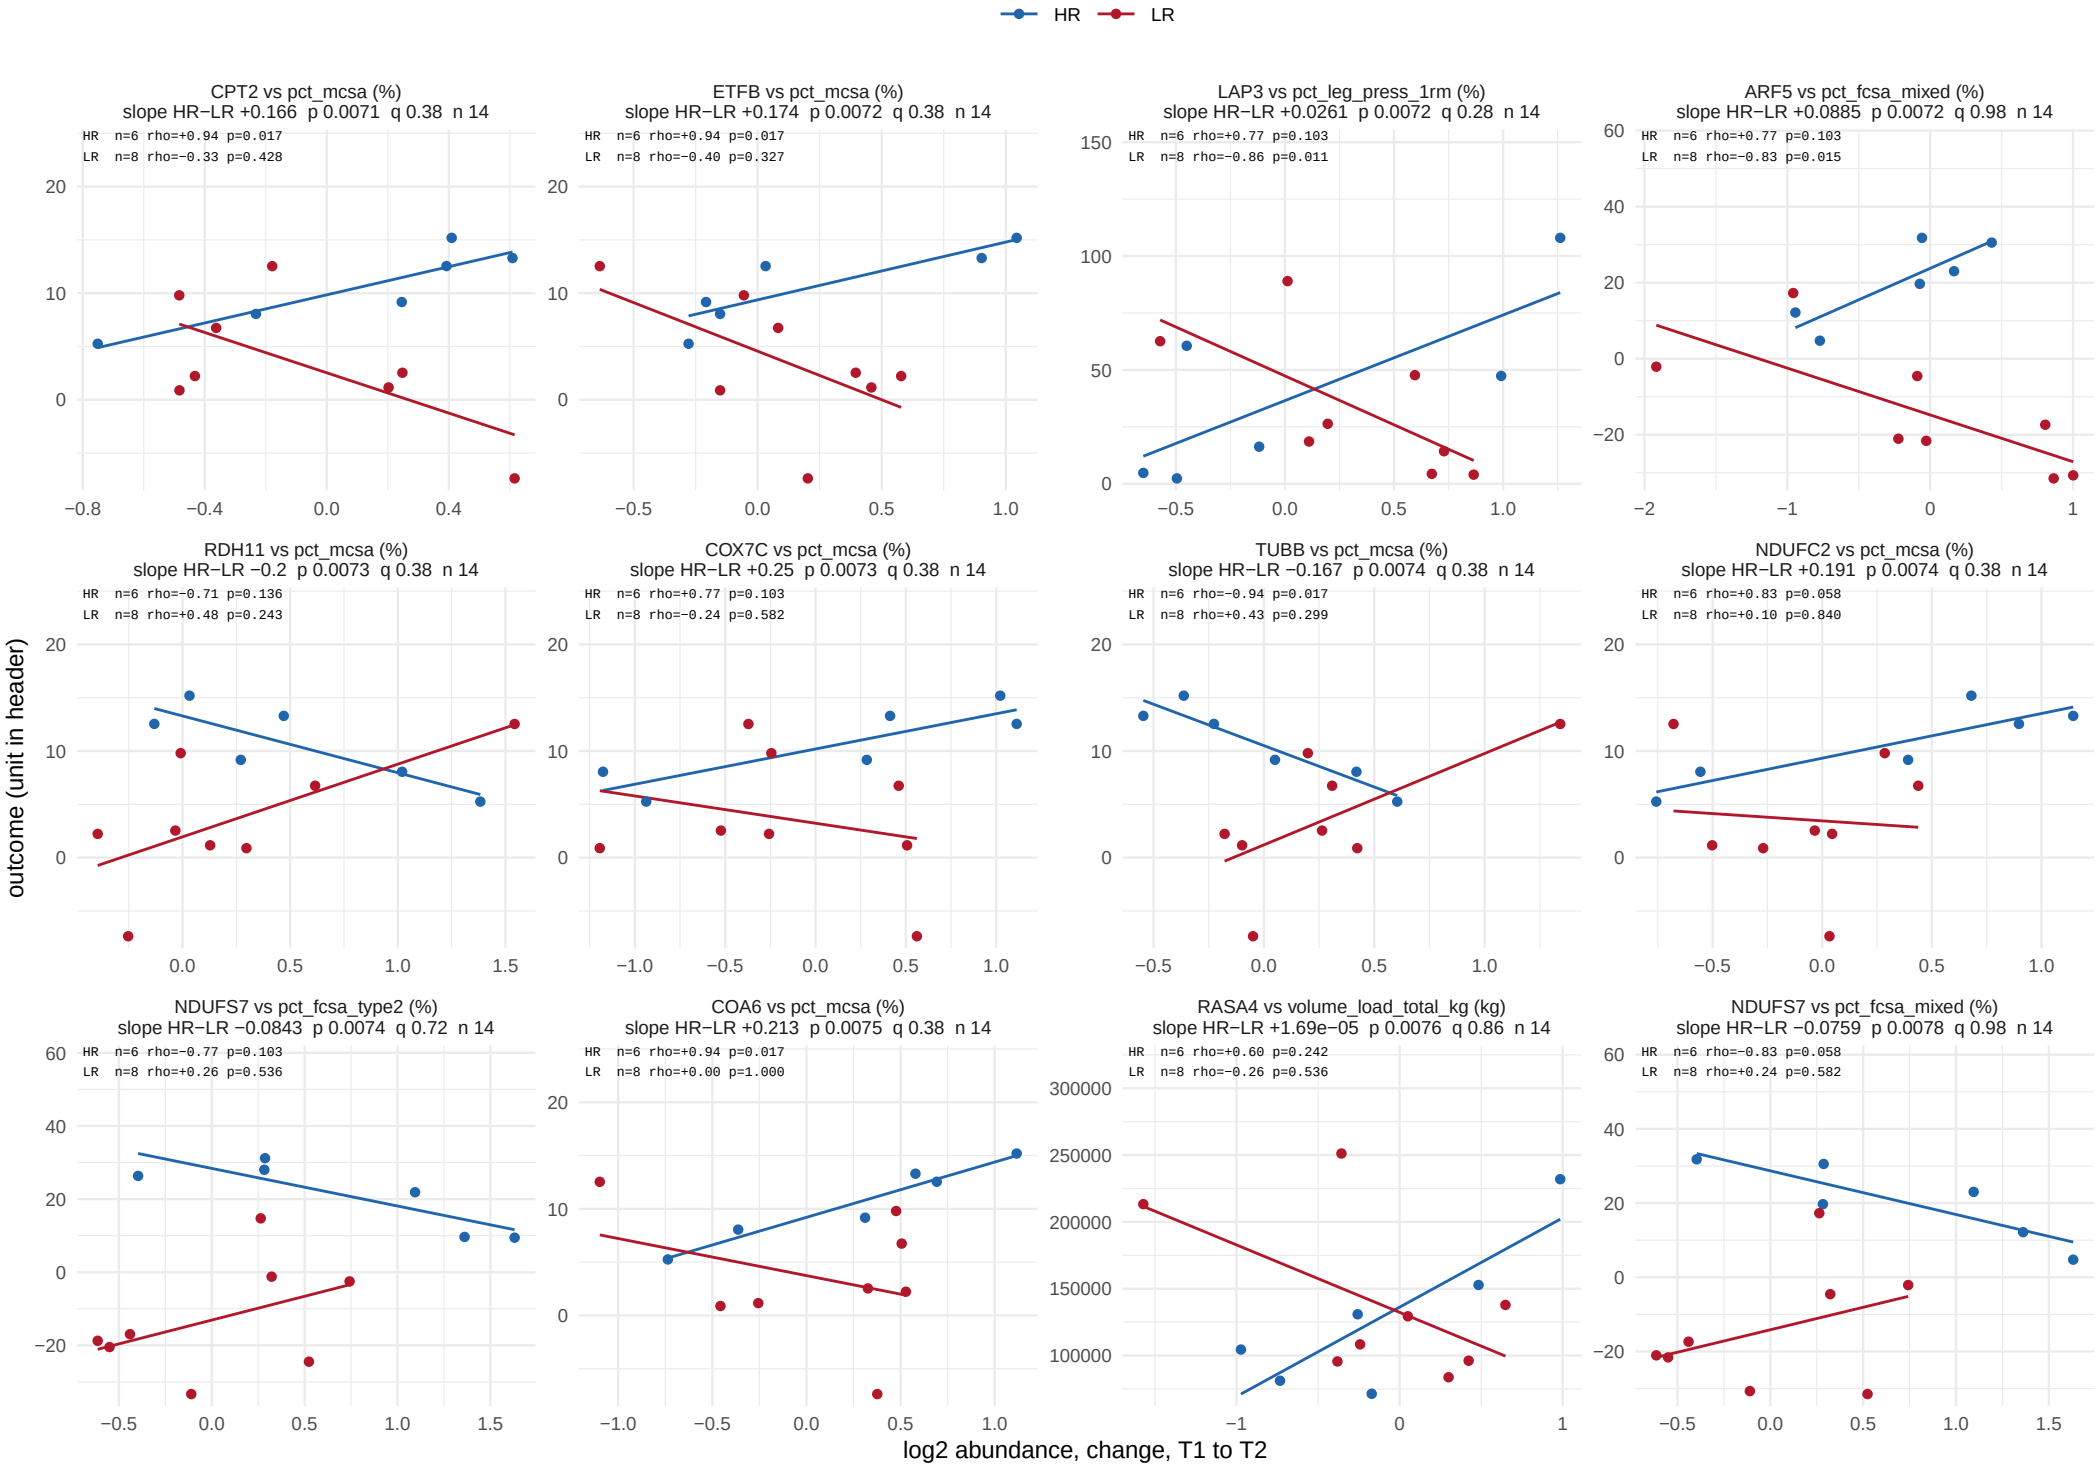

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


665 of 13300 feature−outcome pairs at p < 0.05, 11 at BH < 0.05. Page 12 of 56.

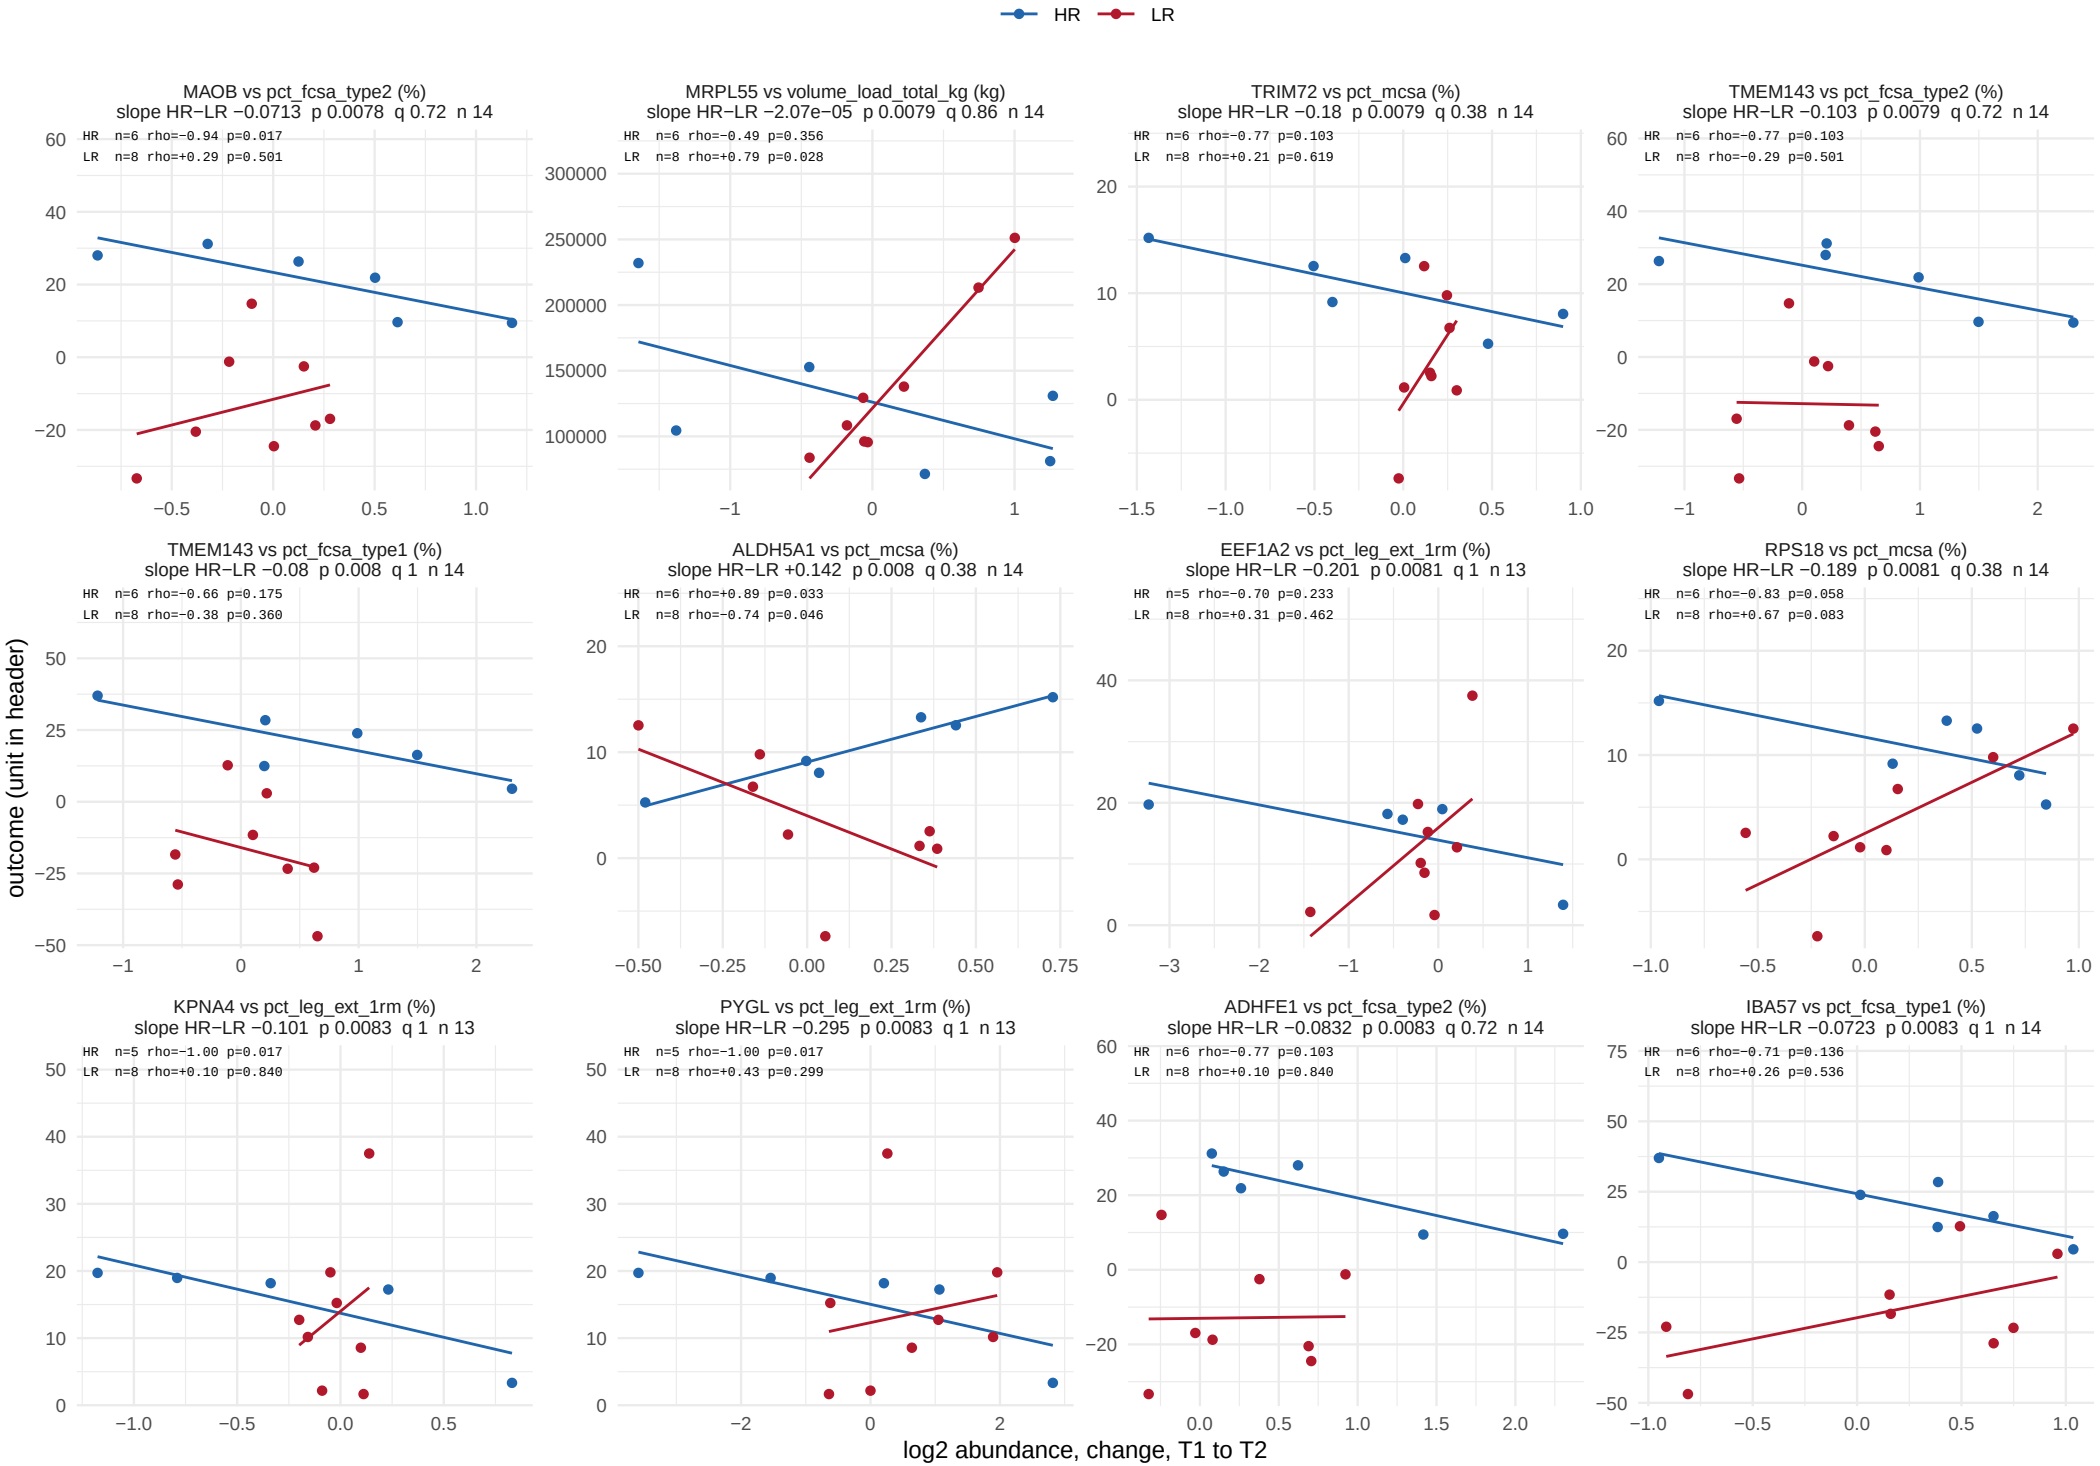

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


665 of 13300 feature−outcome pairs at p < 0.05, 11 at BH < 0.05. Page 13 of 56.

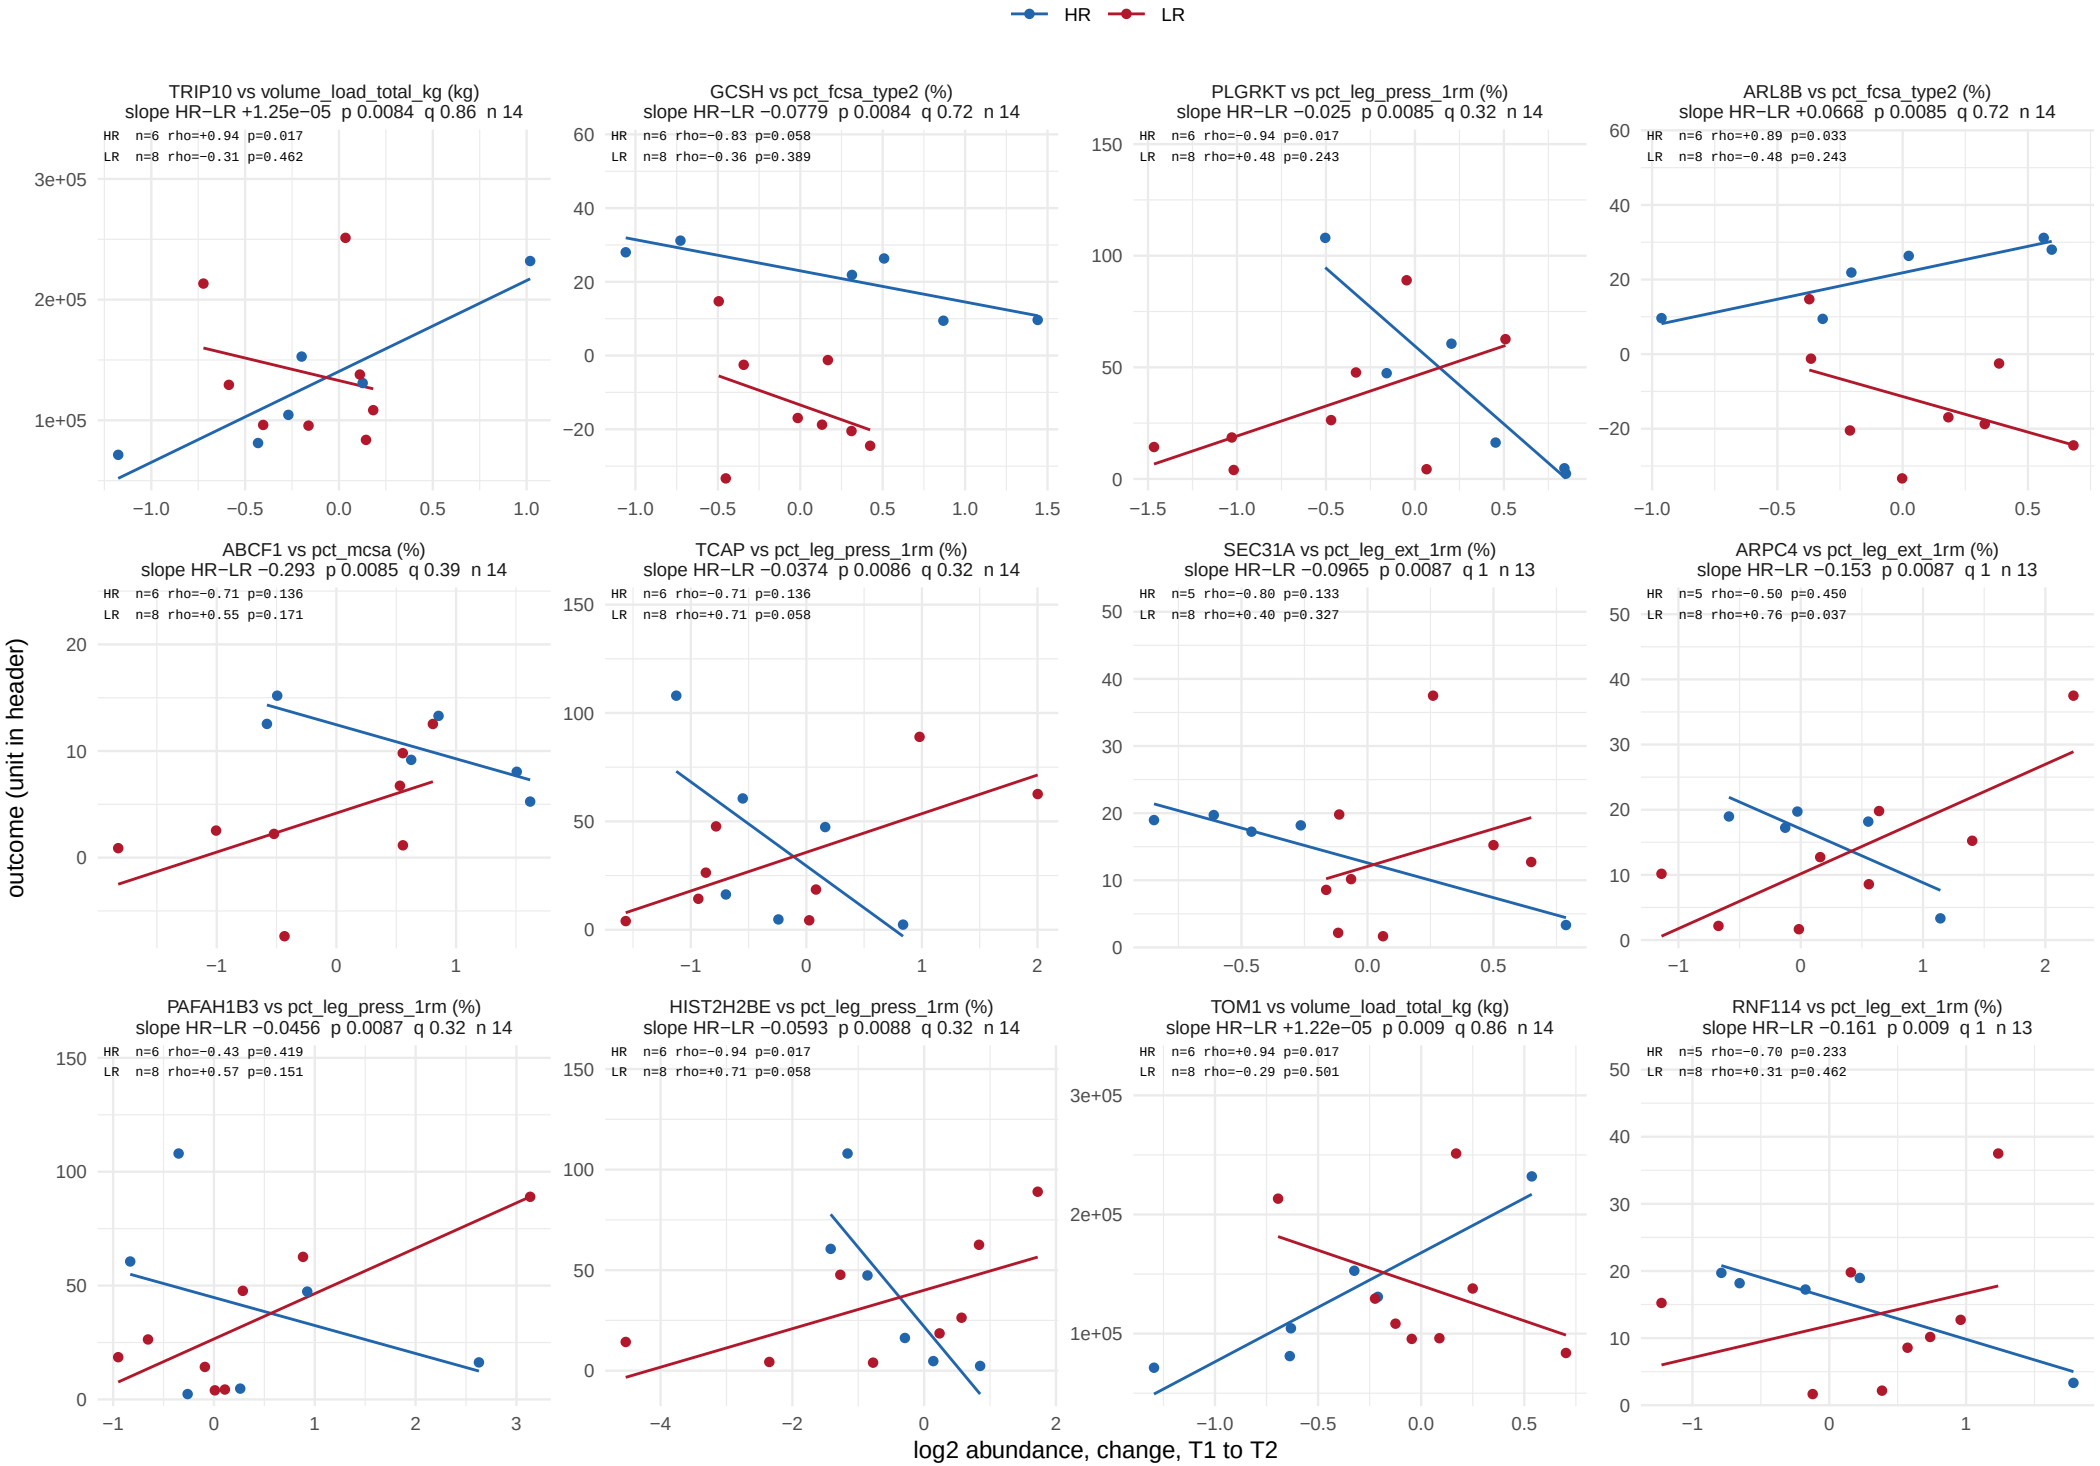

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


665 of 13300 feature−outcome pairs at p < 0.05, 11 at BH < 0.05. Page 14 of 56.

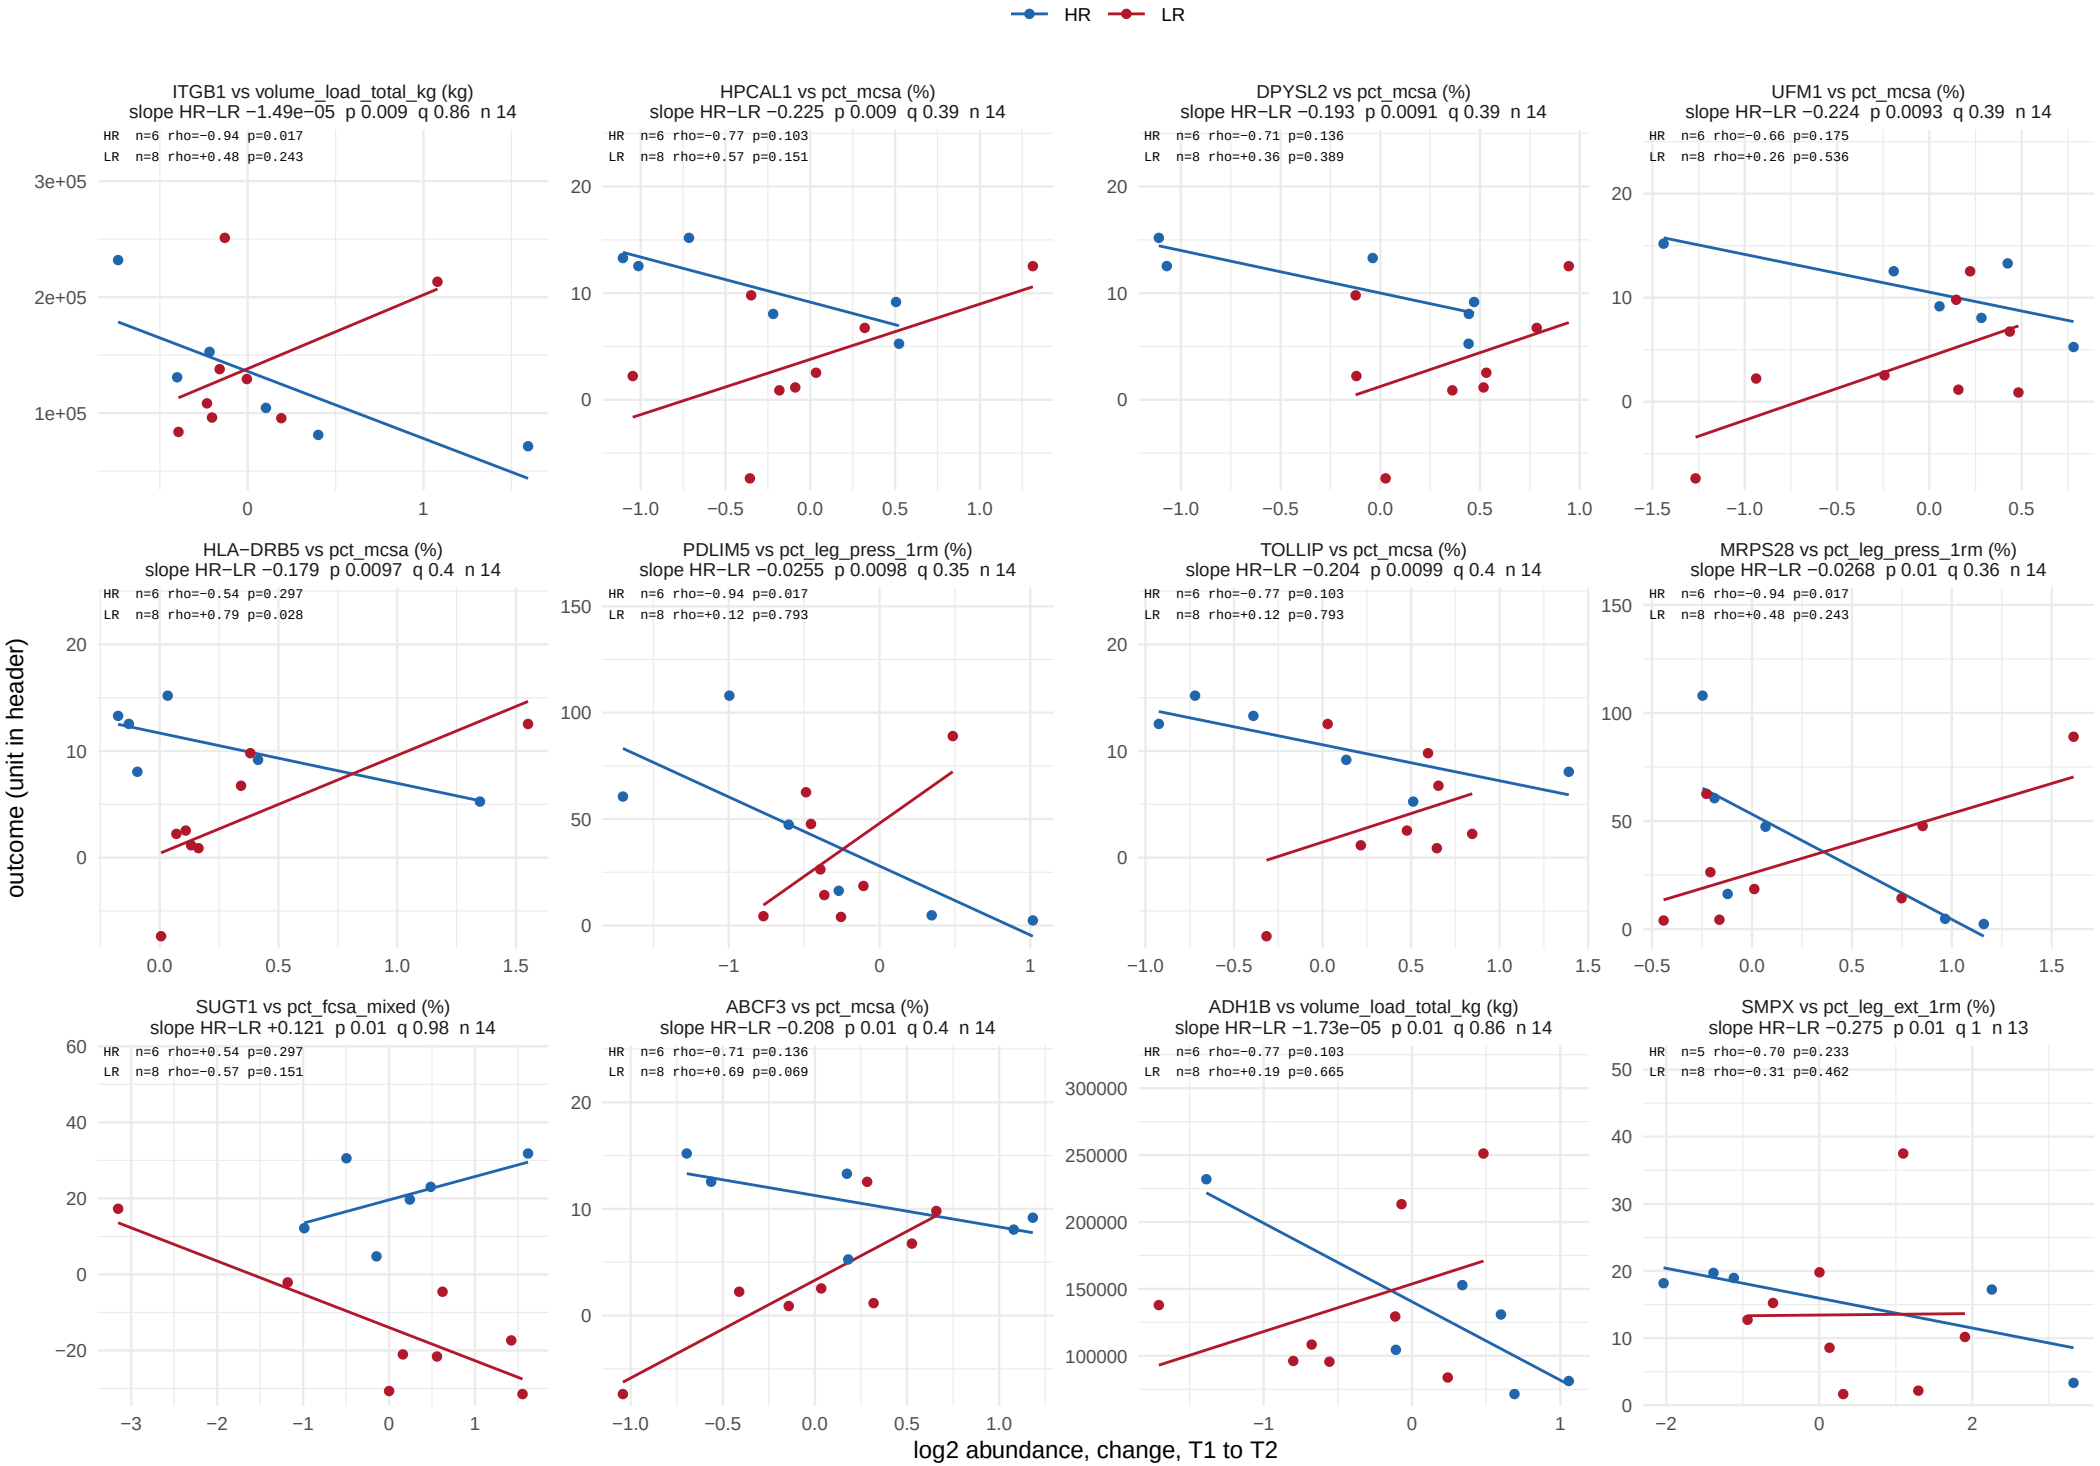

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


665 of 13300 feature−outcome pairs at p < 0.05, 11 at BH < 0.05. Page 15 of 56.

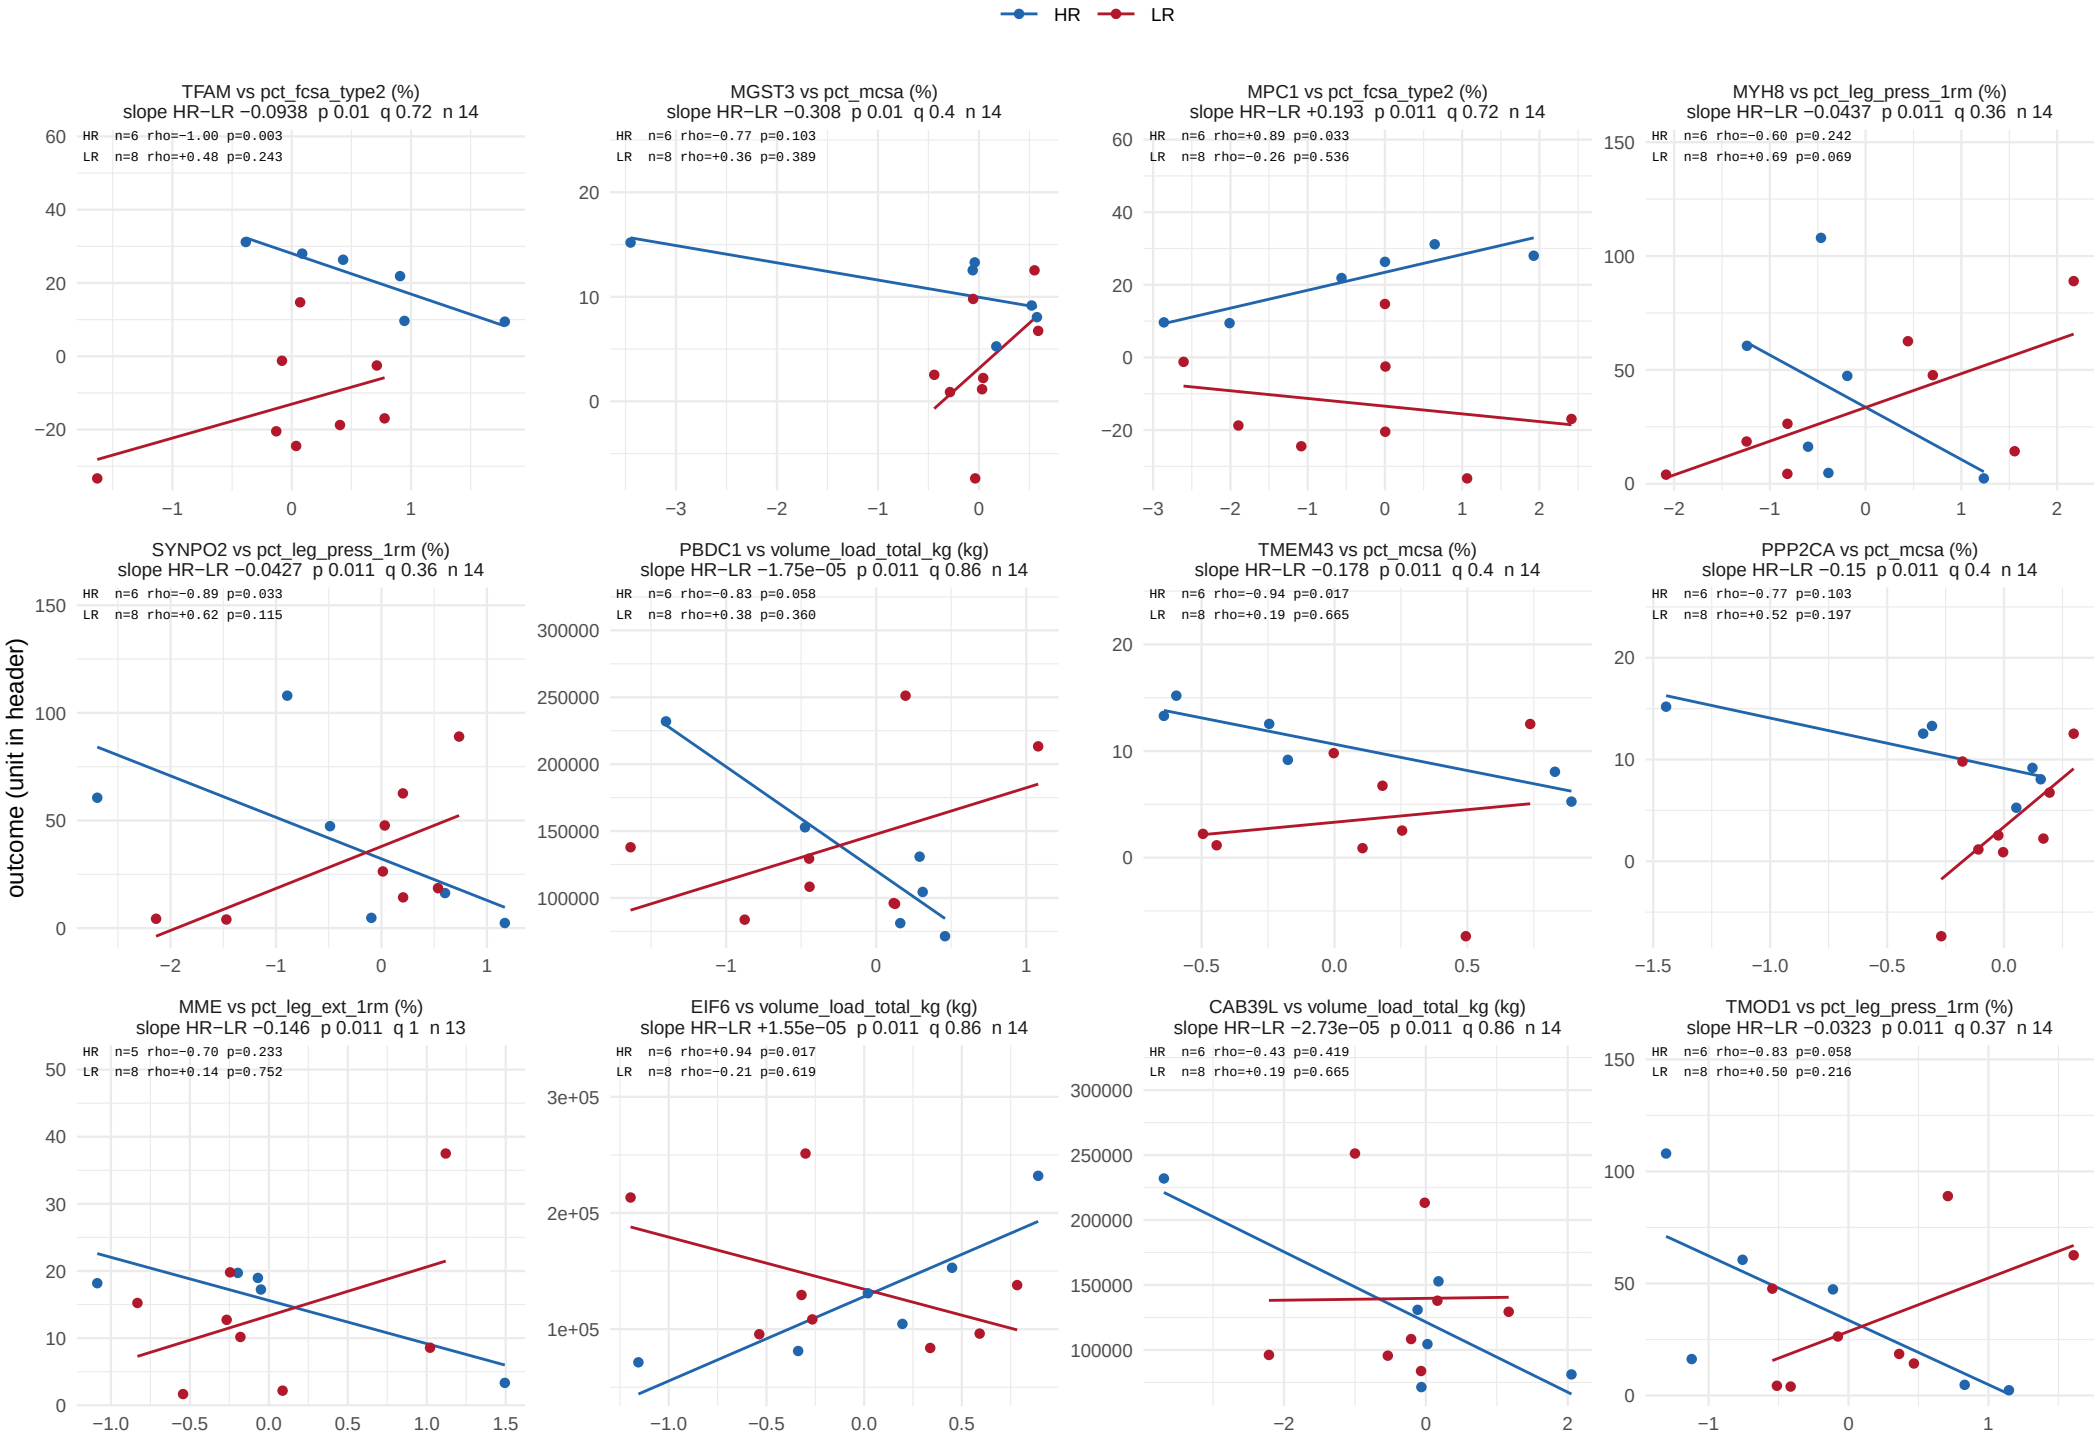

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


665 of 13300 feature−outcome pairs at p < 0.05, 11 at BH < 0.05. Page 16 of 56.

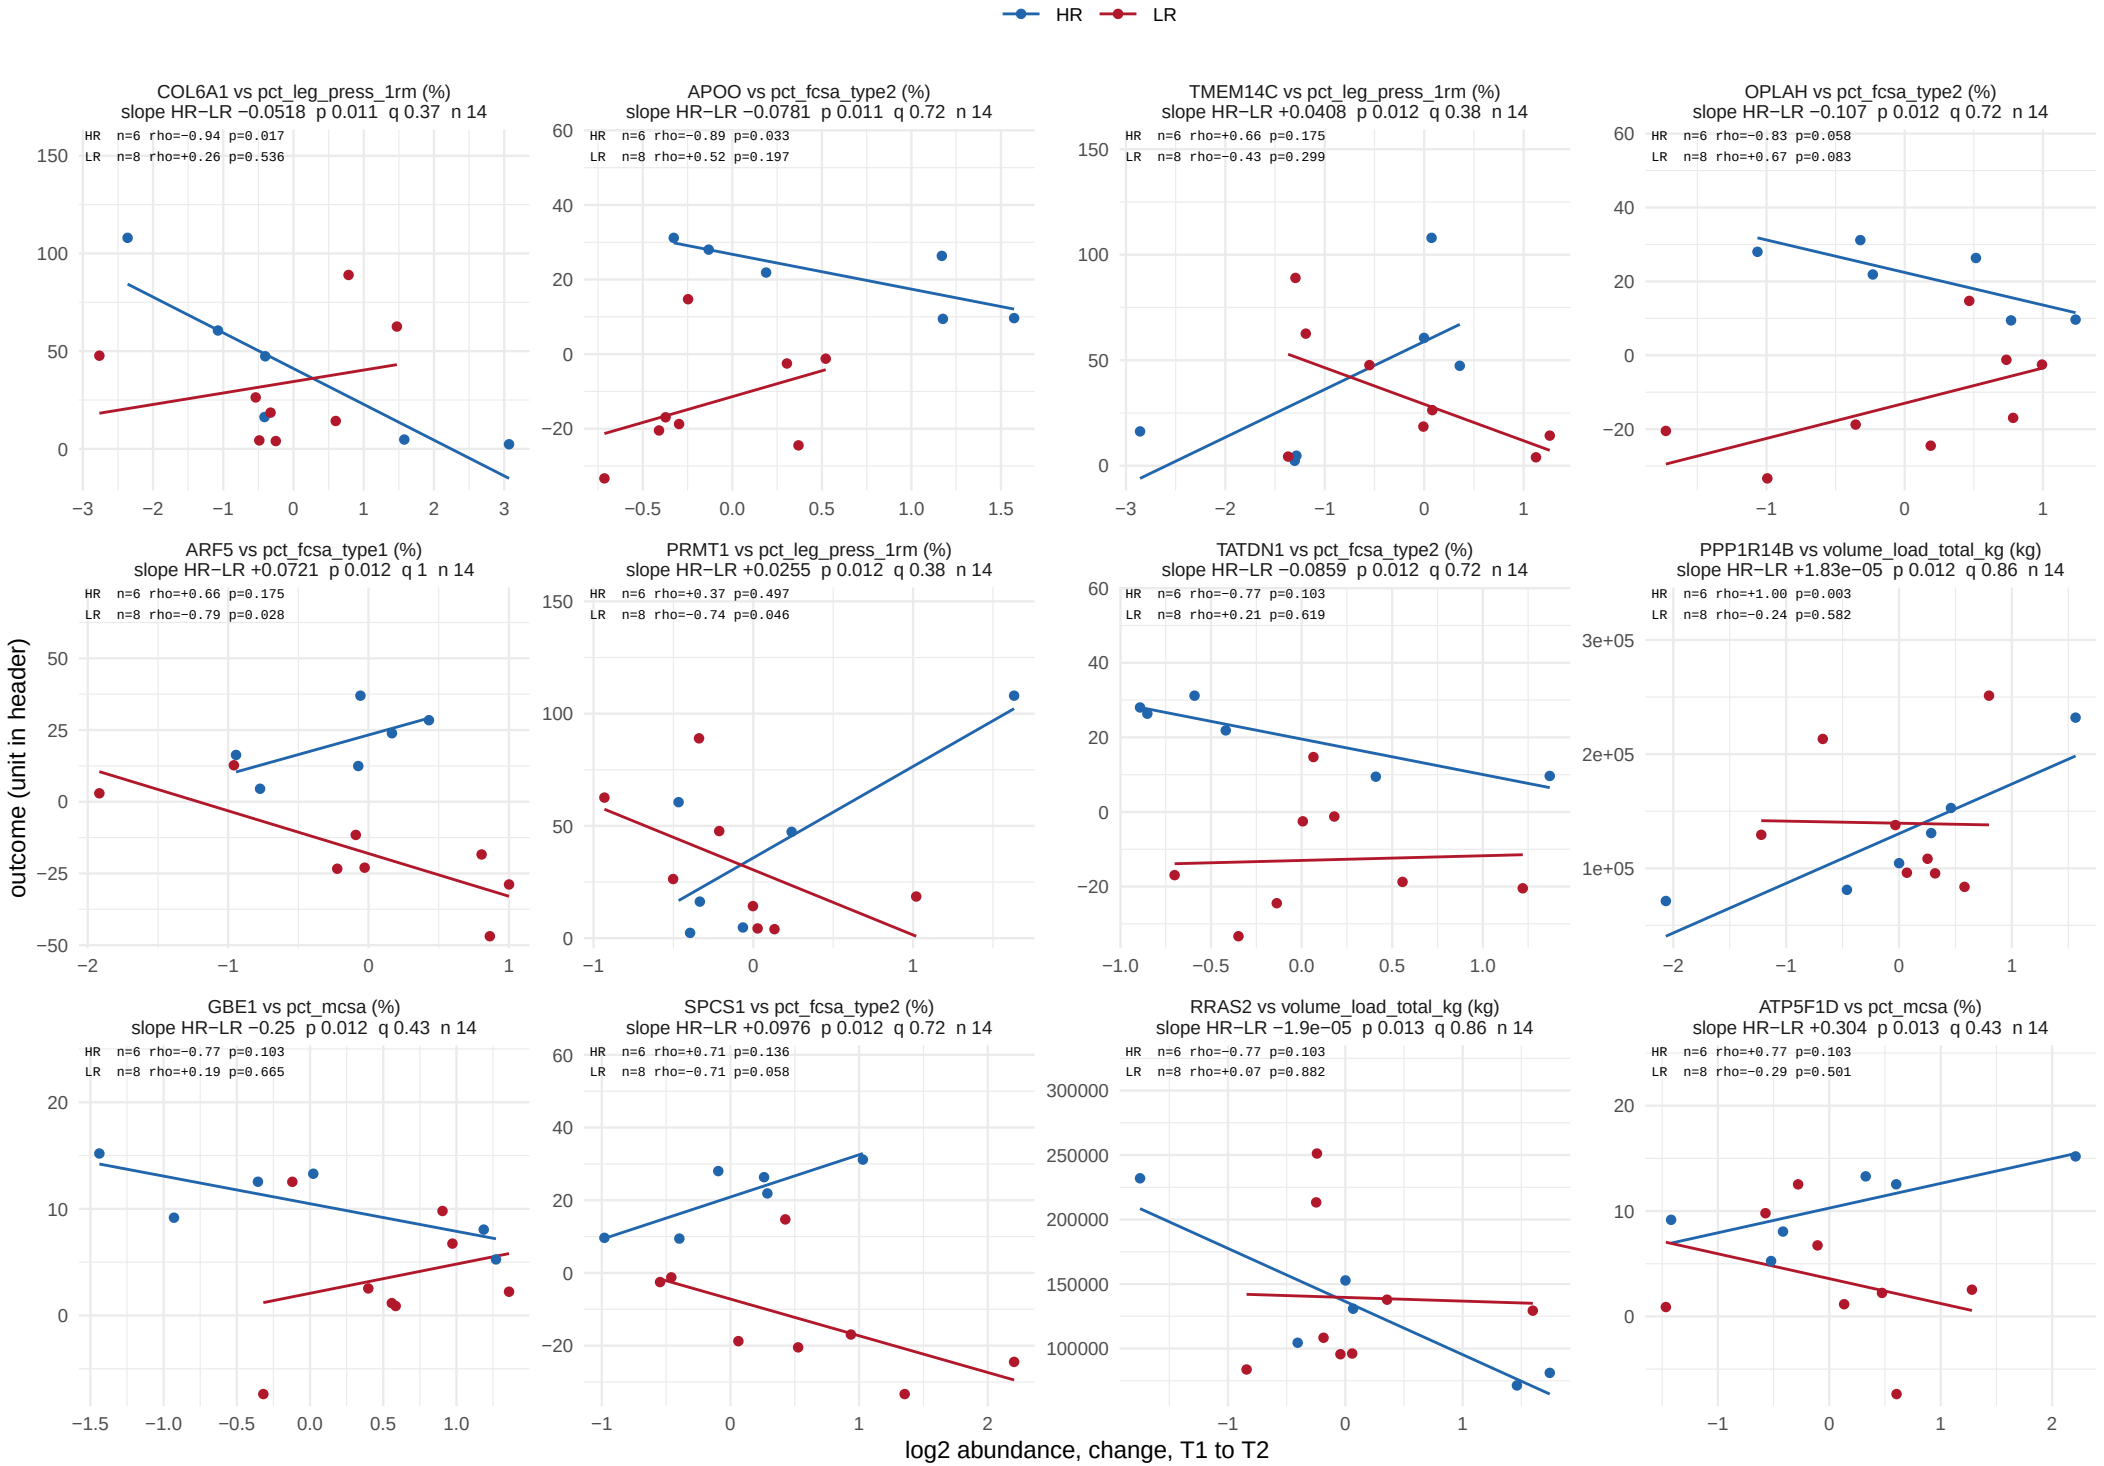

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


665 of 13300 feature−outcome pairs at p < 0.05, 11 at BH < 0.05. Page 17 of 56.

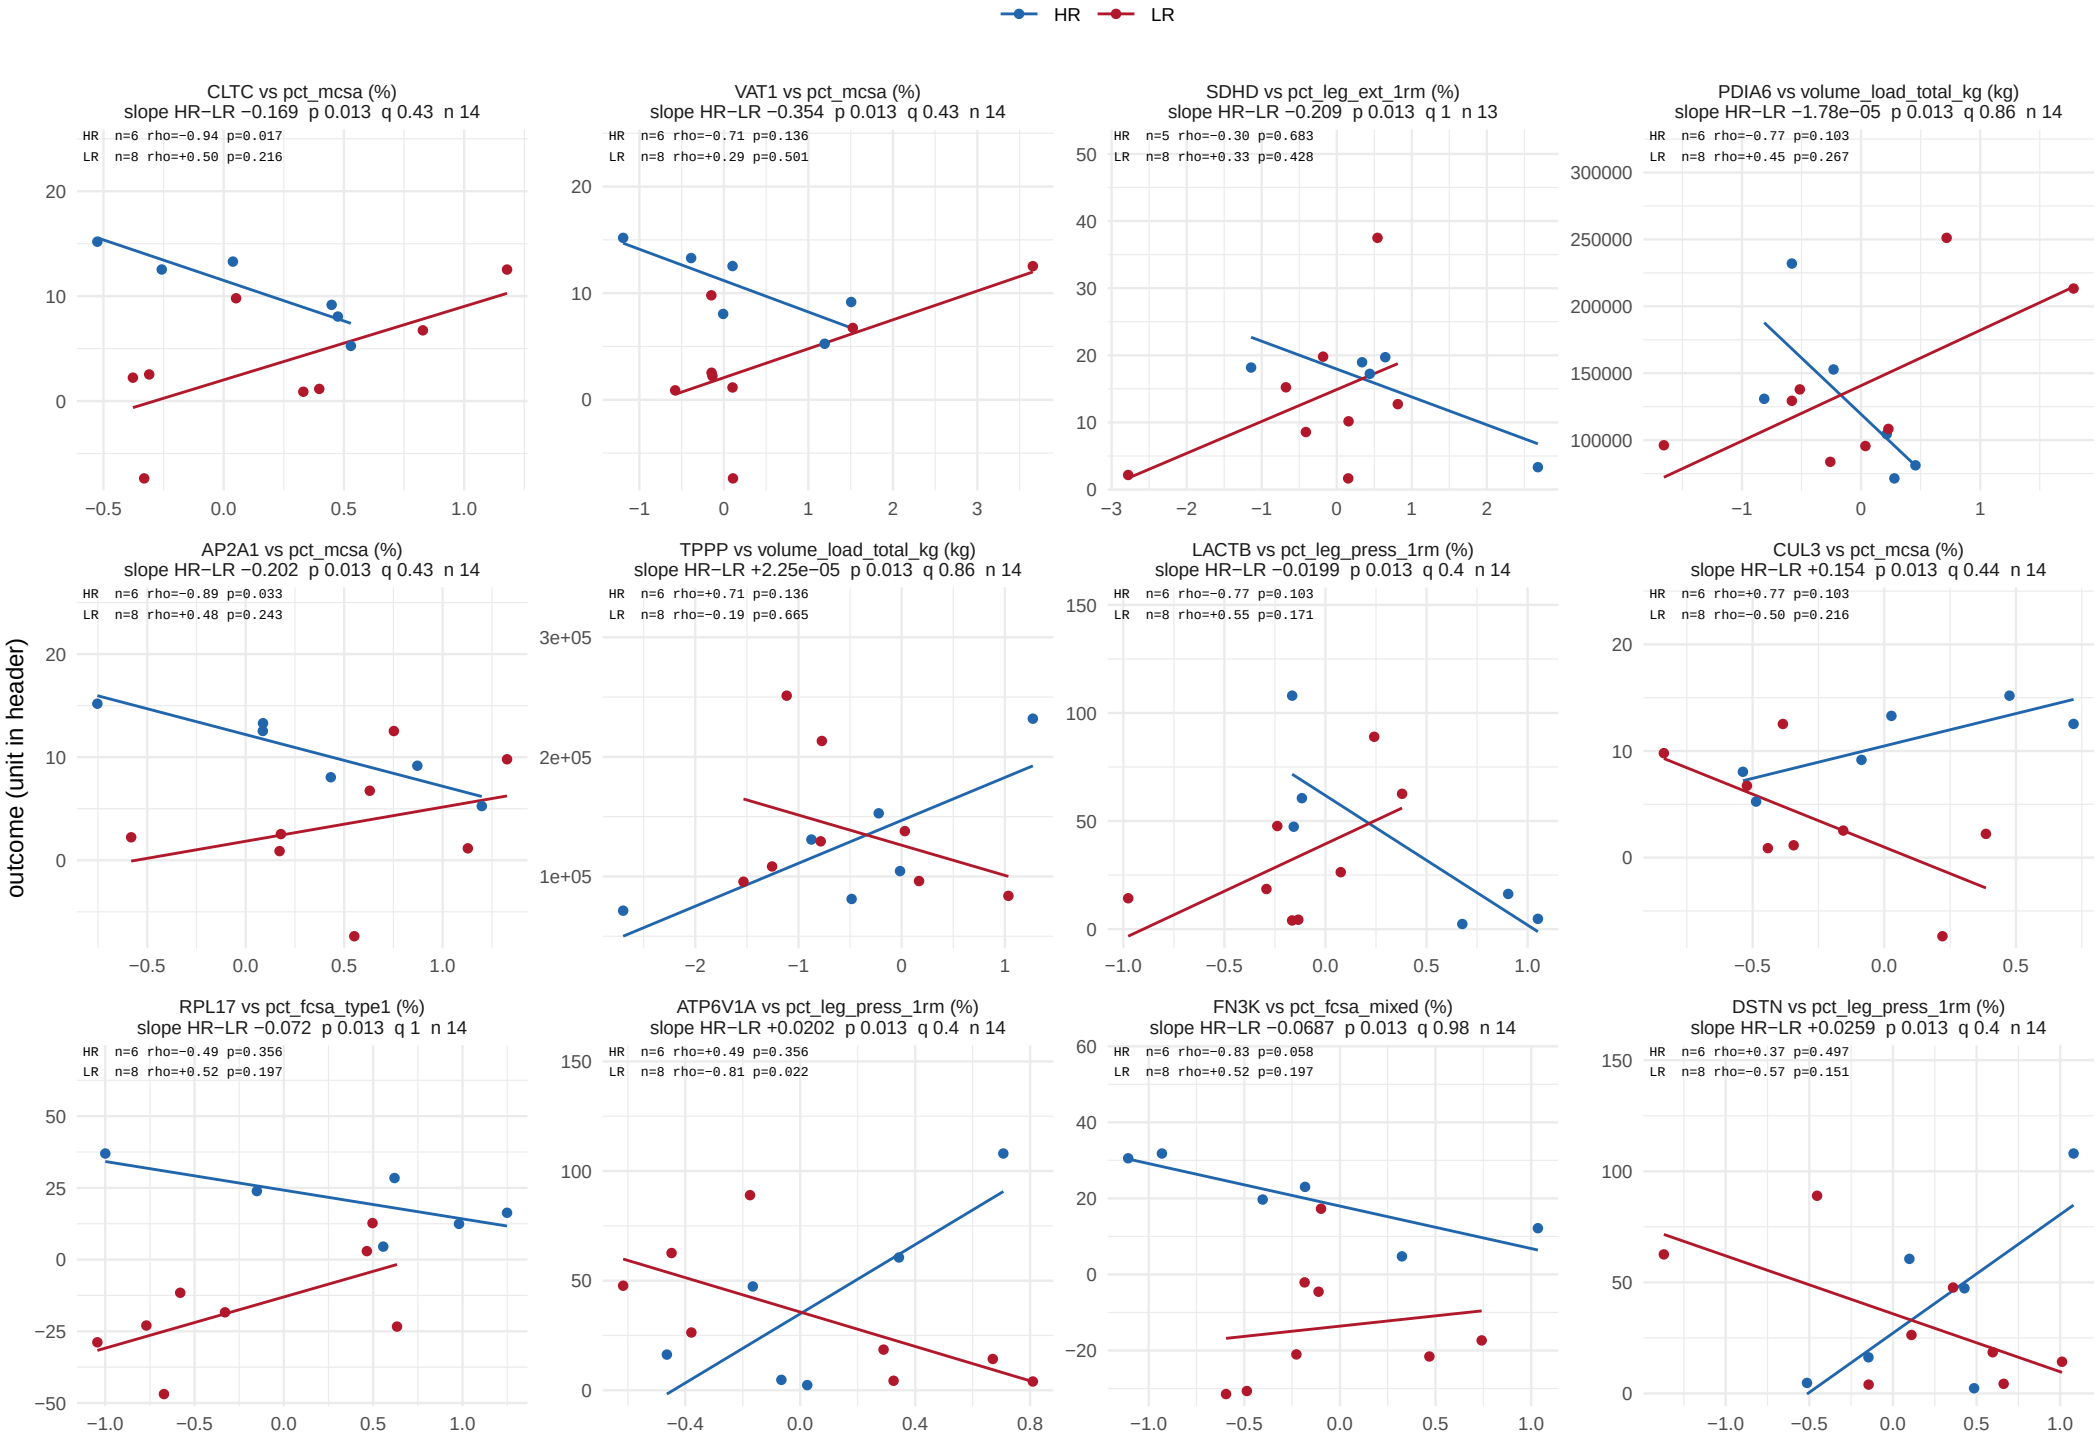

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


665 of 13300 feature−outcome pairs at p < 0.05, 11 at BH < 0.05. Page 18 of 56.

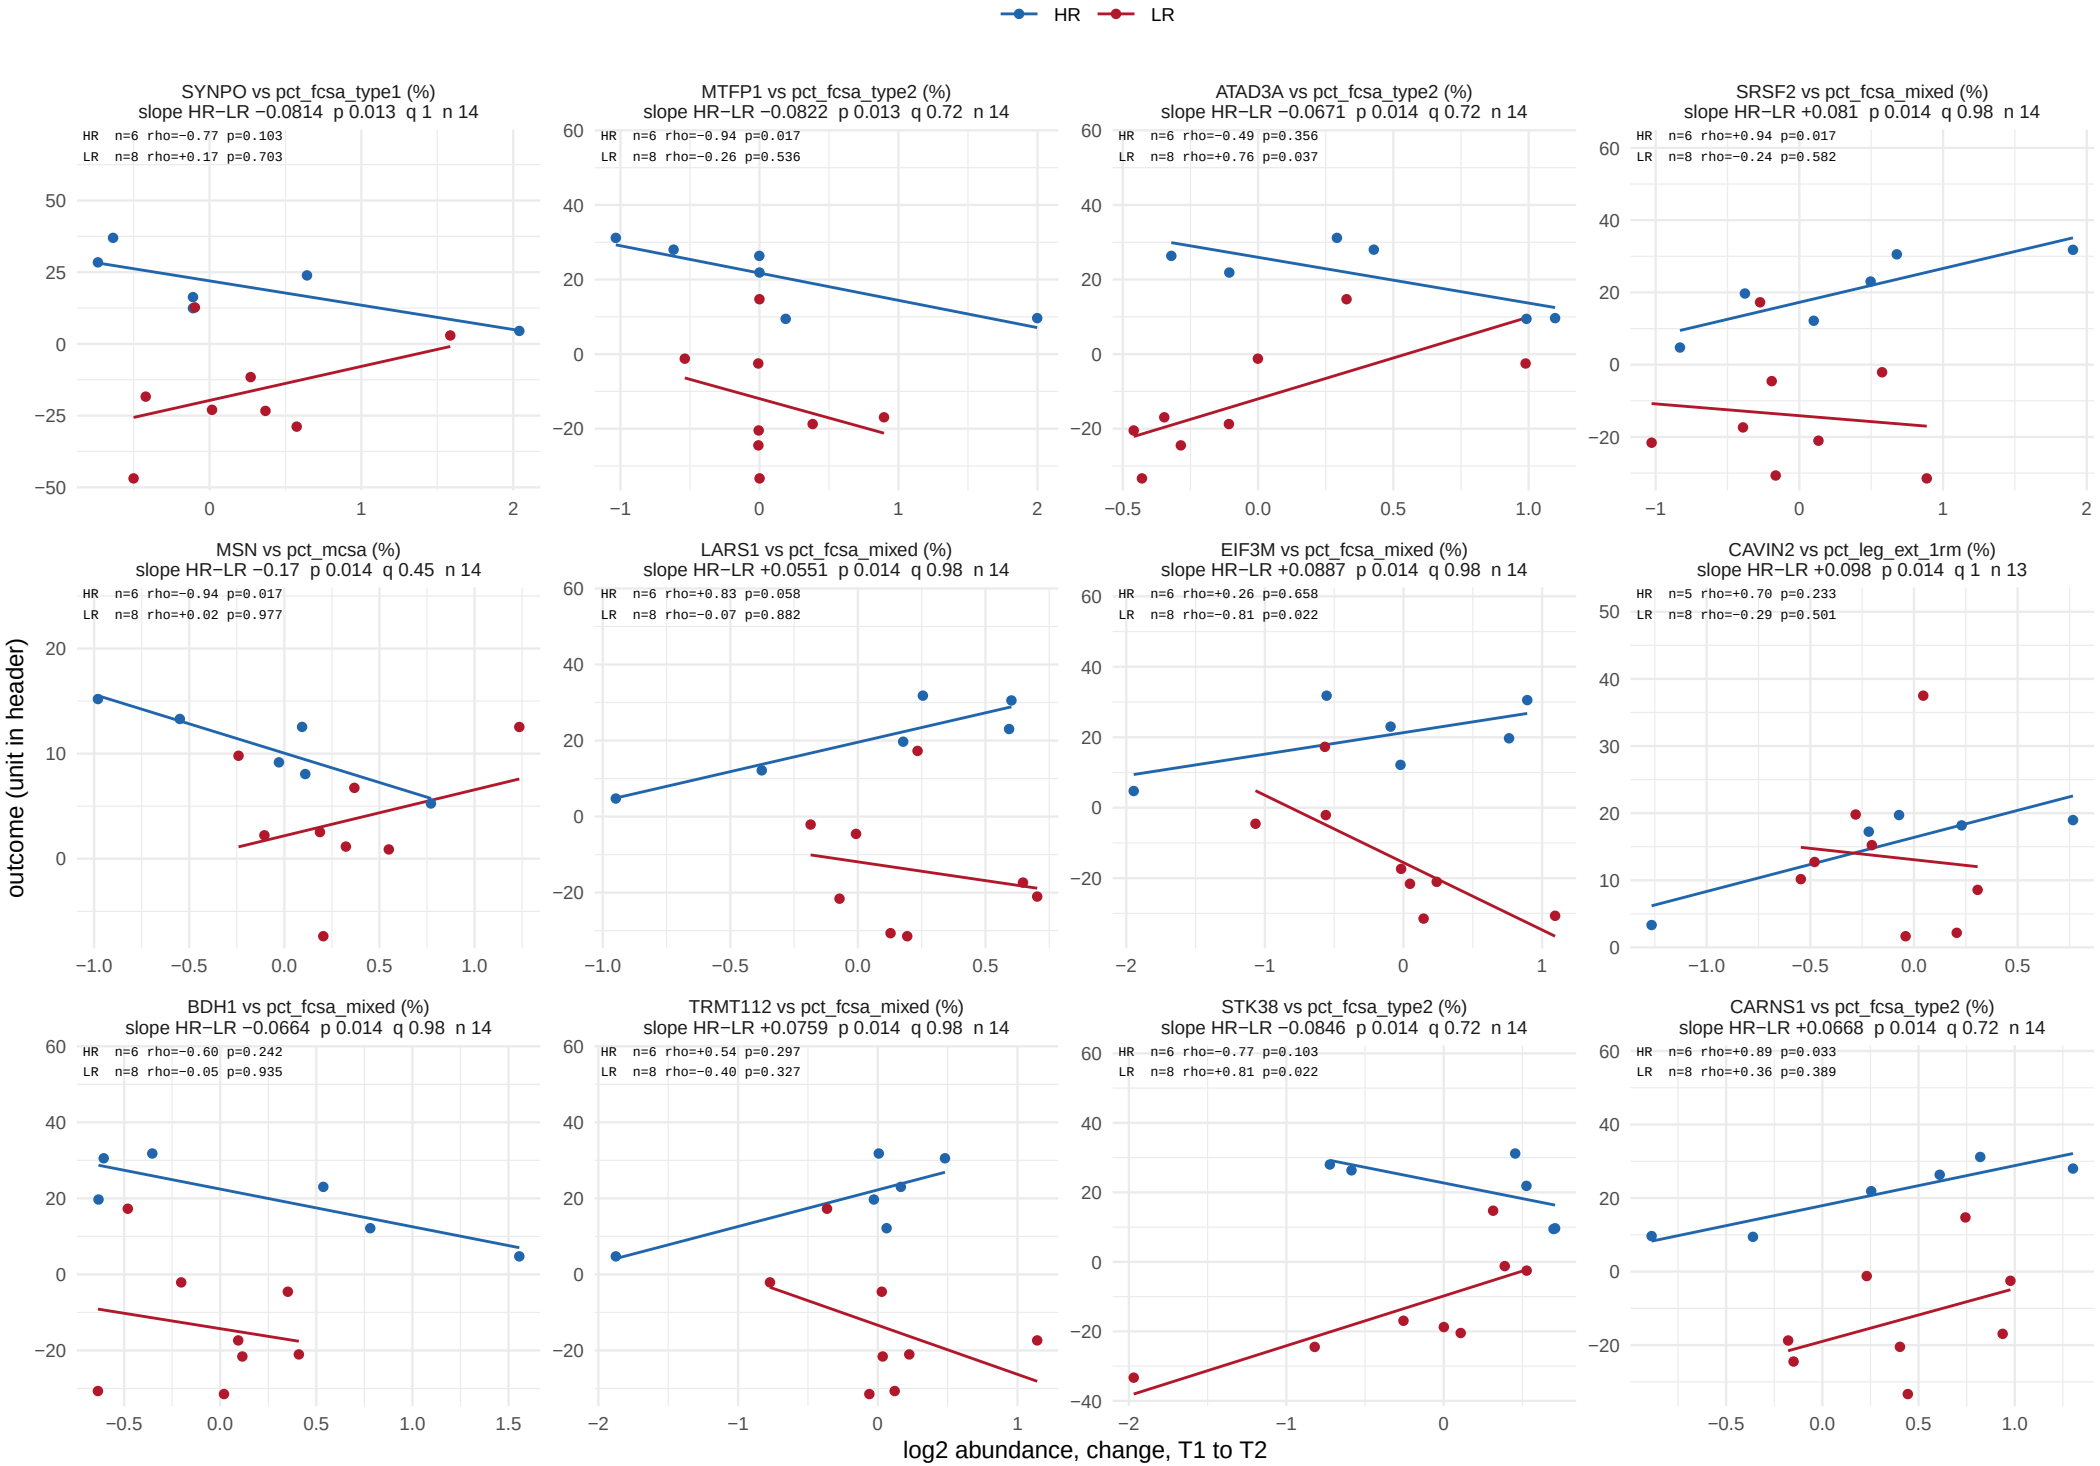

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


665 of 13300 feature−outcome pairs at p < 0.05, 11 at BH < 0.05. Page 19 of 56.

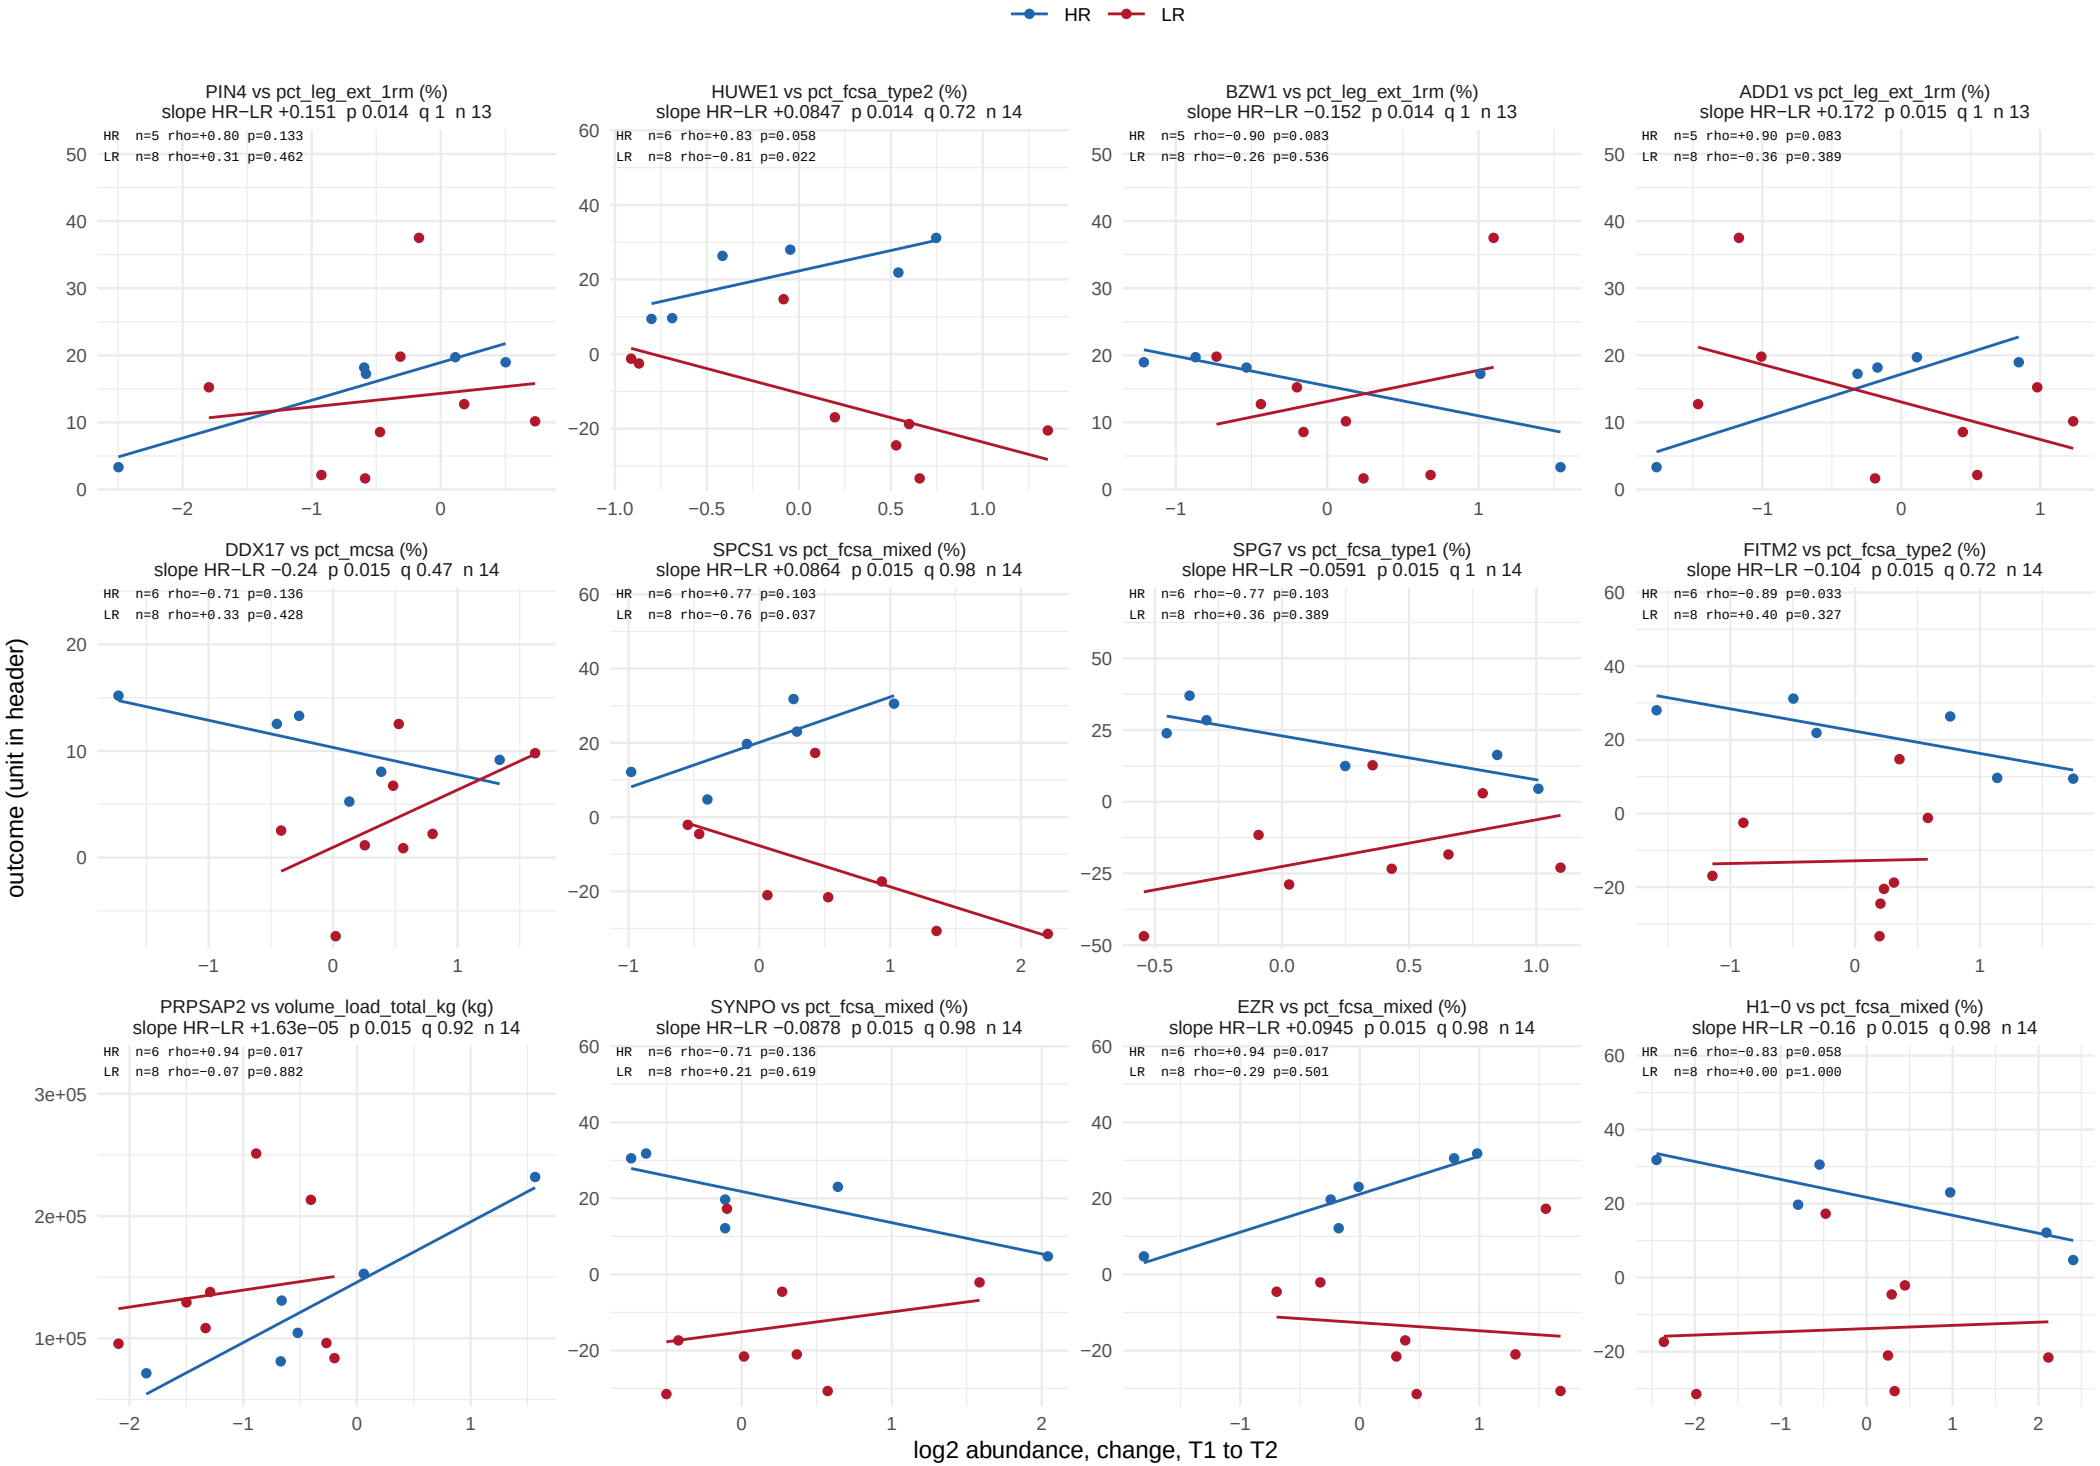

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


665 of 13300 feature−outcome pairs at p < 0.05, 11 at BH < 0.05. Page 20 of 56.

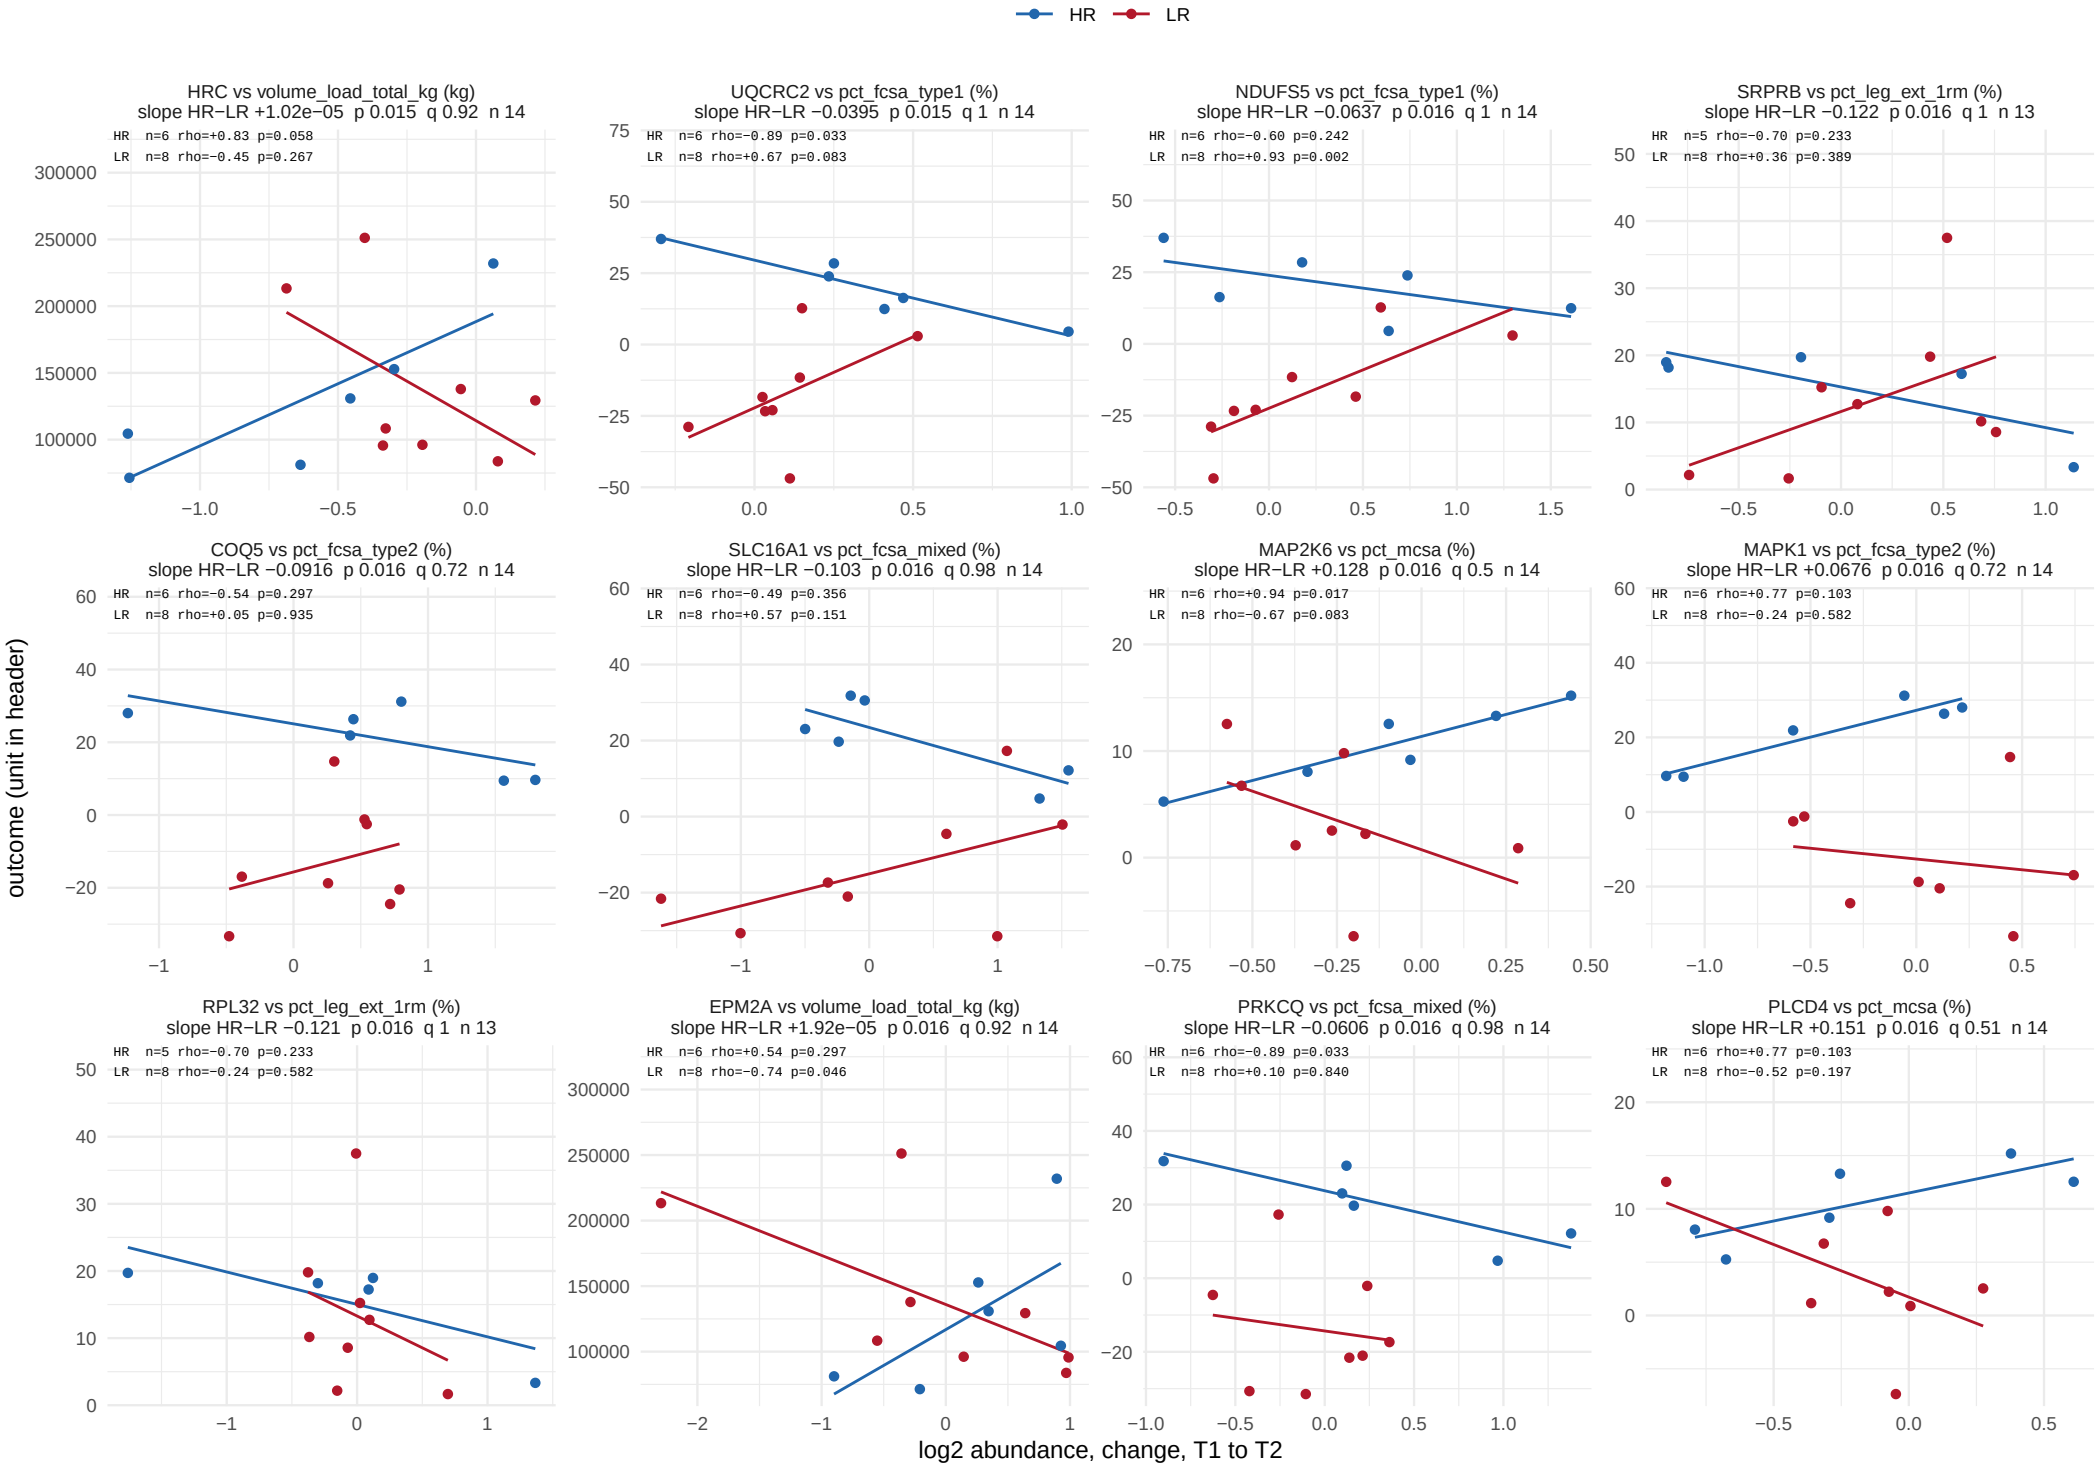

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


665 of 13300 feature−outcome pairs at p < 0.05, 11 at BH < 0.05. Page 21 of 56.

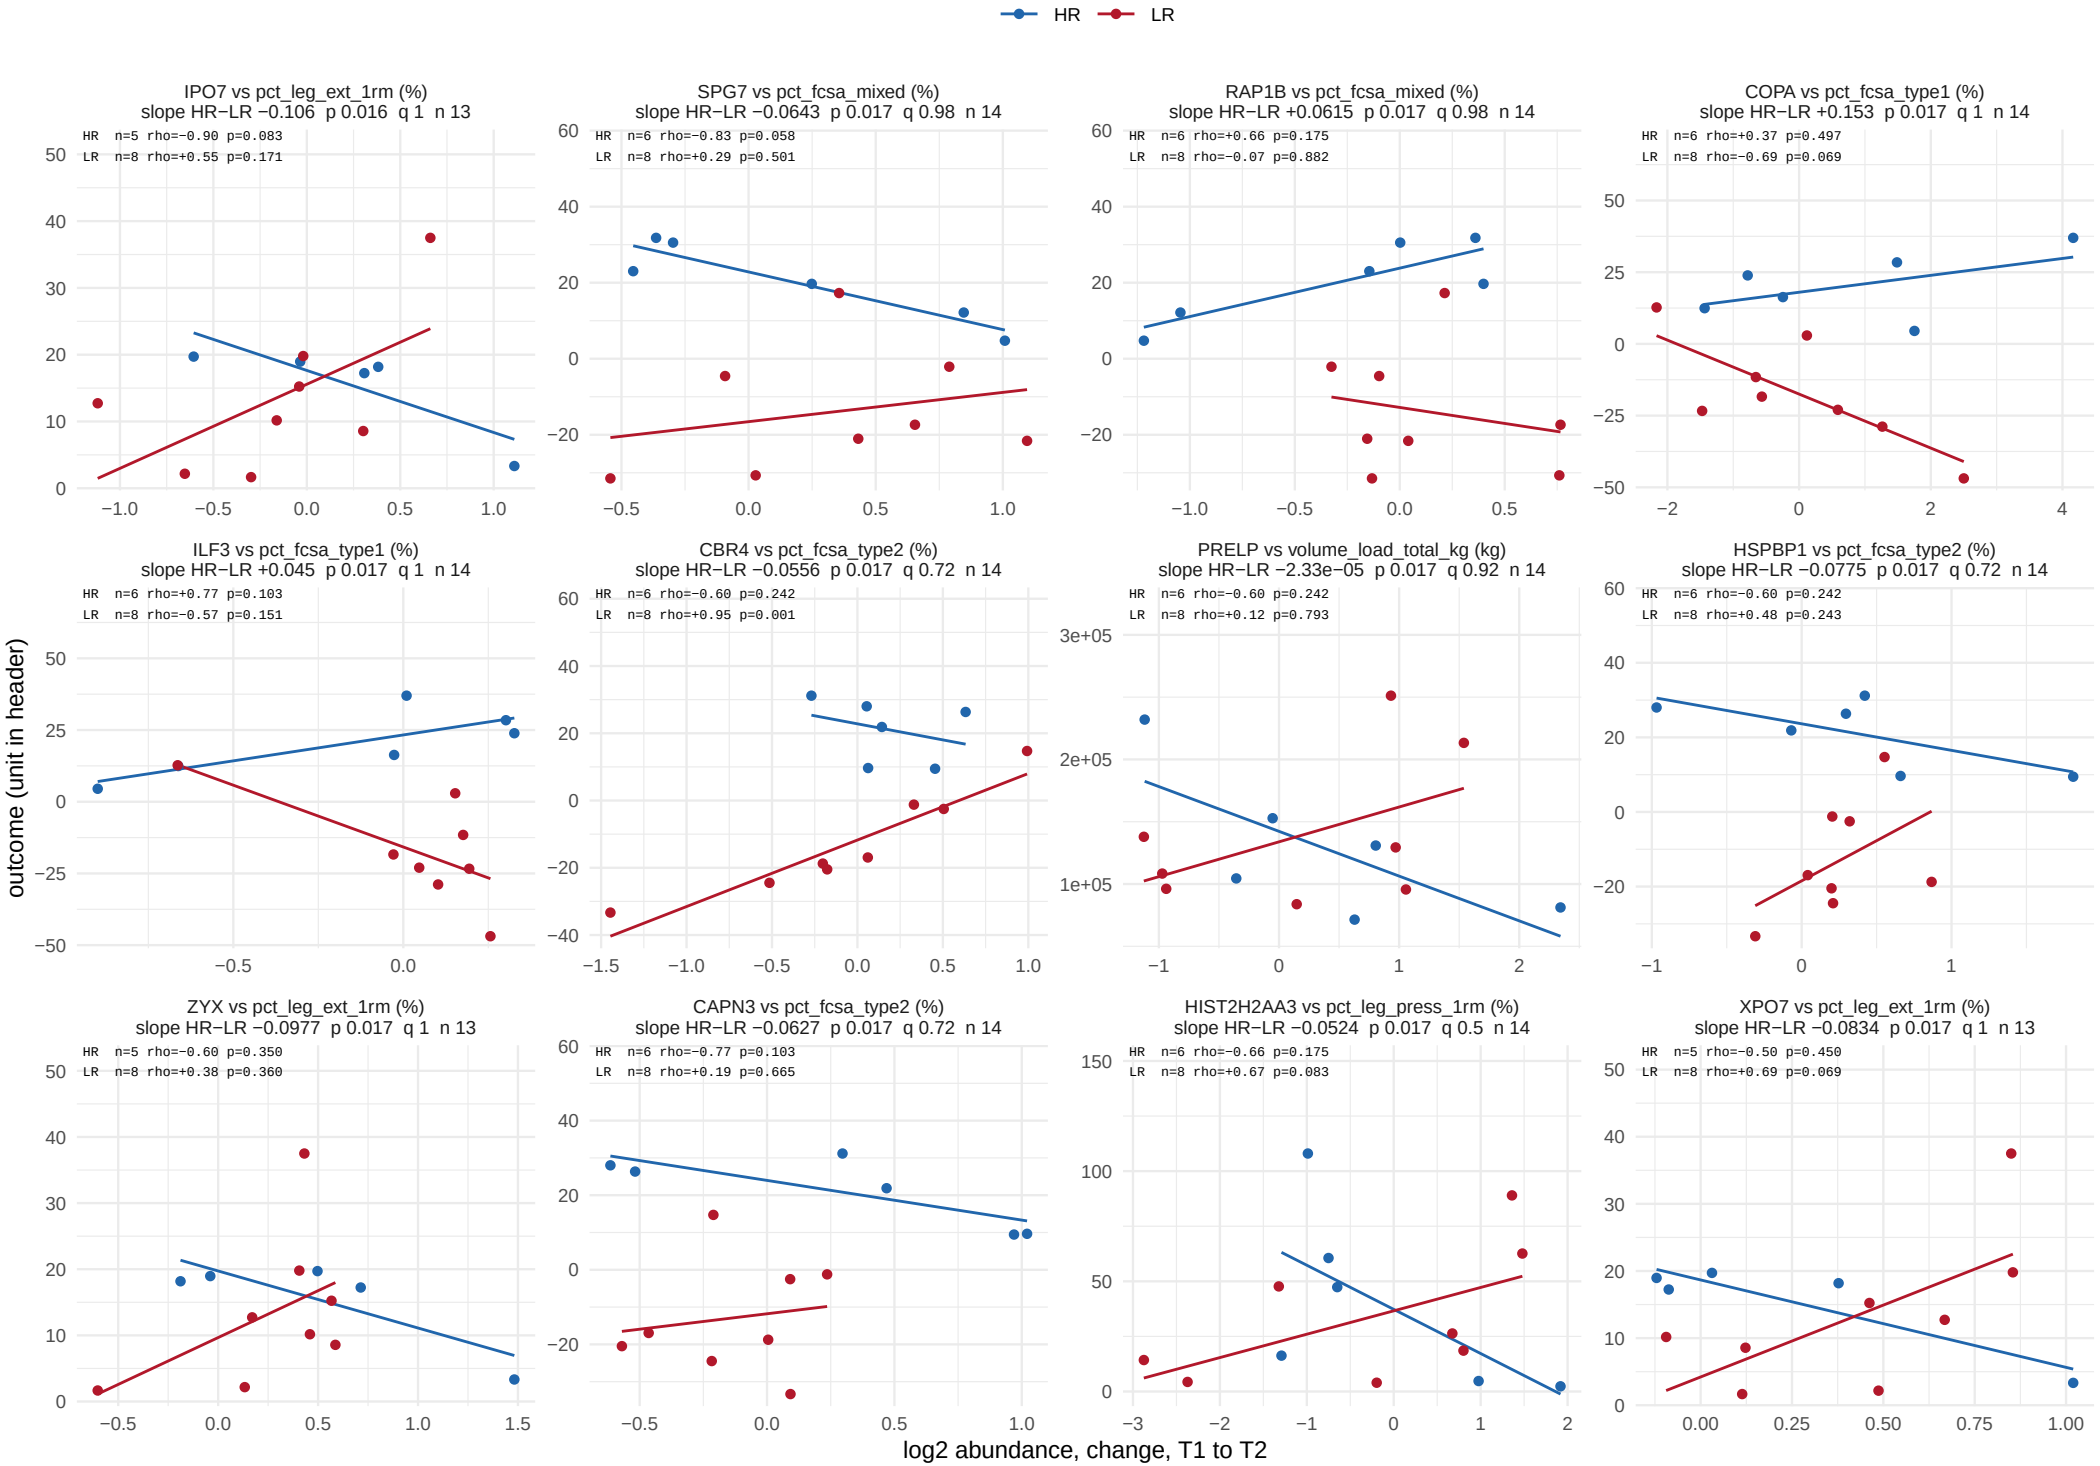

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


665 of 13300 feature−outcome pairs at p < 0.05, 11 at BH < 0.05. Page 22 of 56.

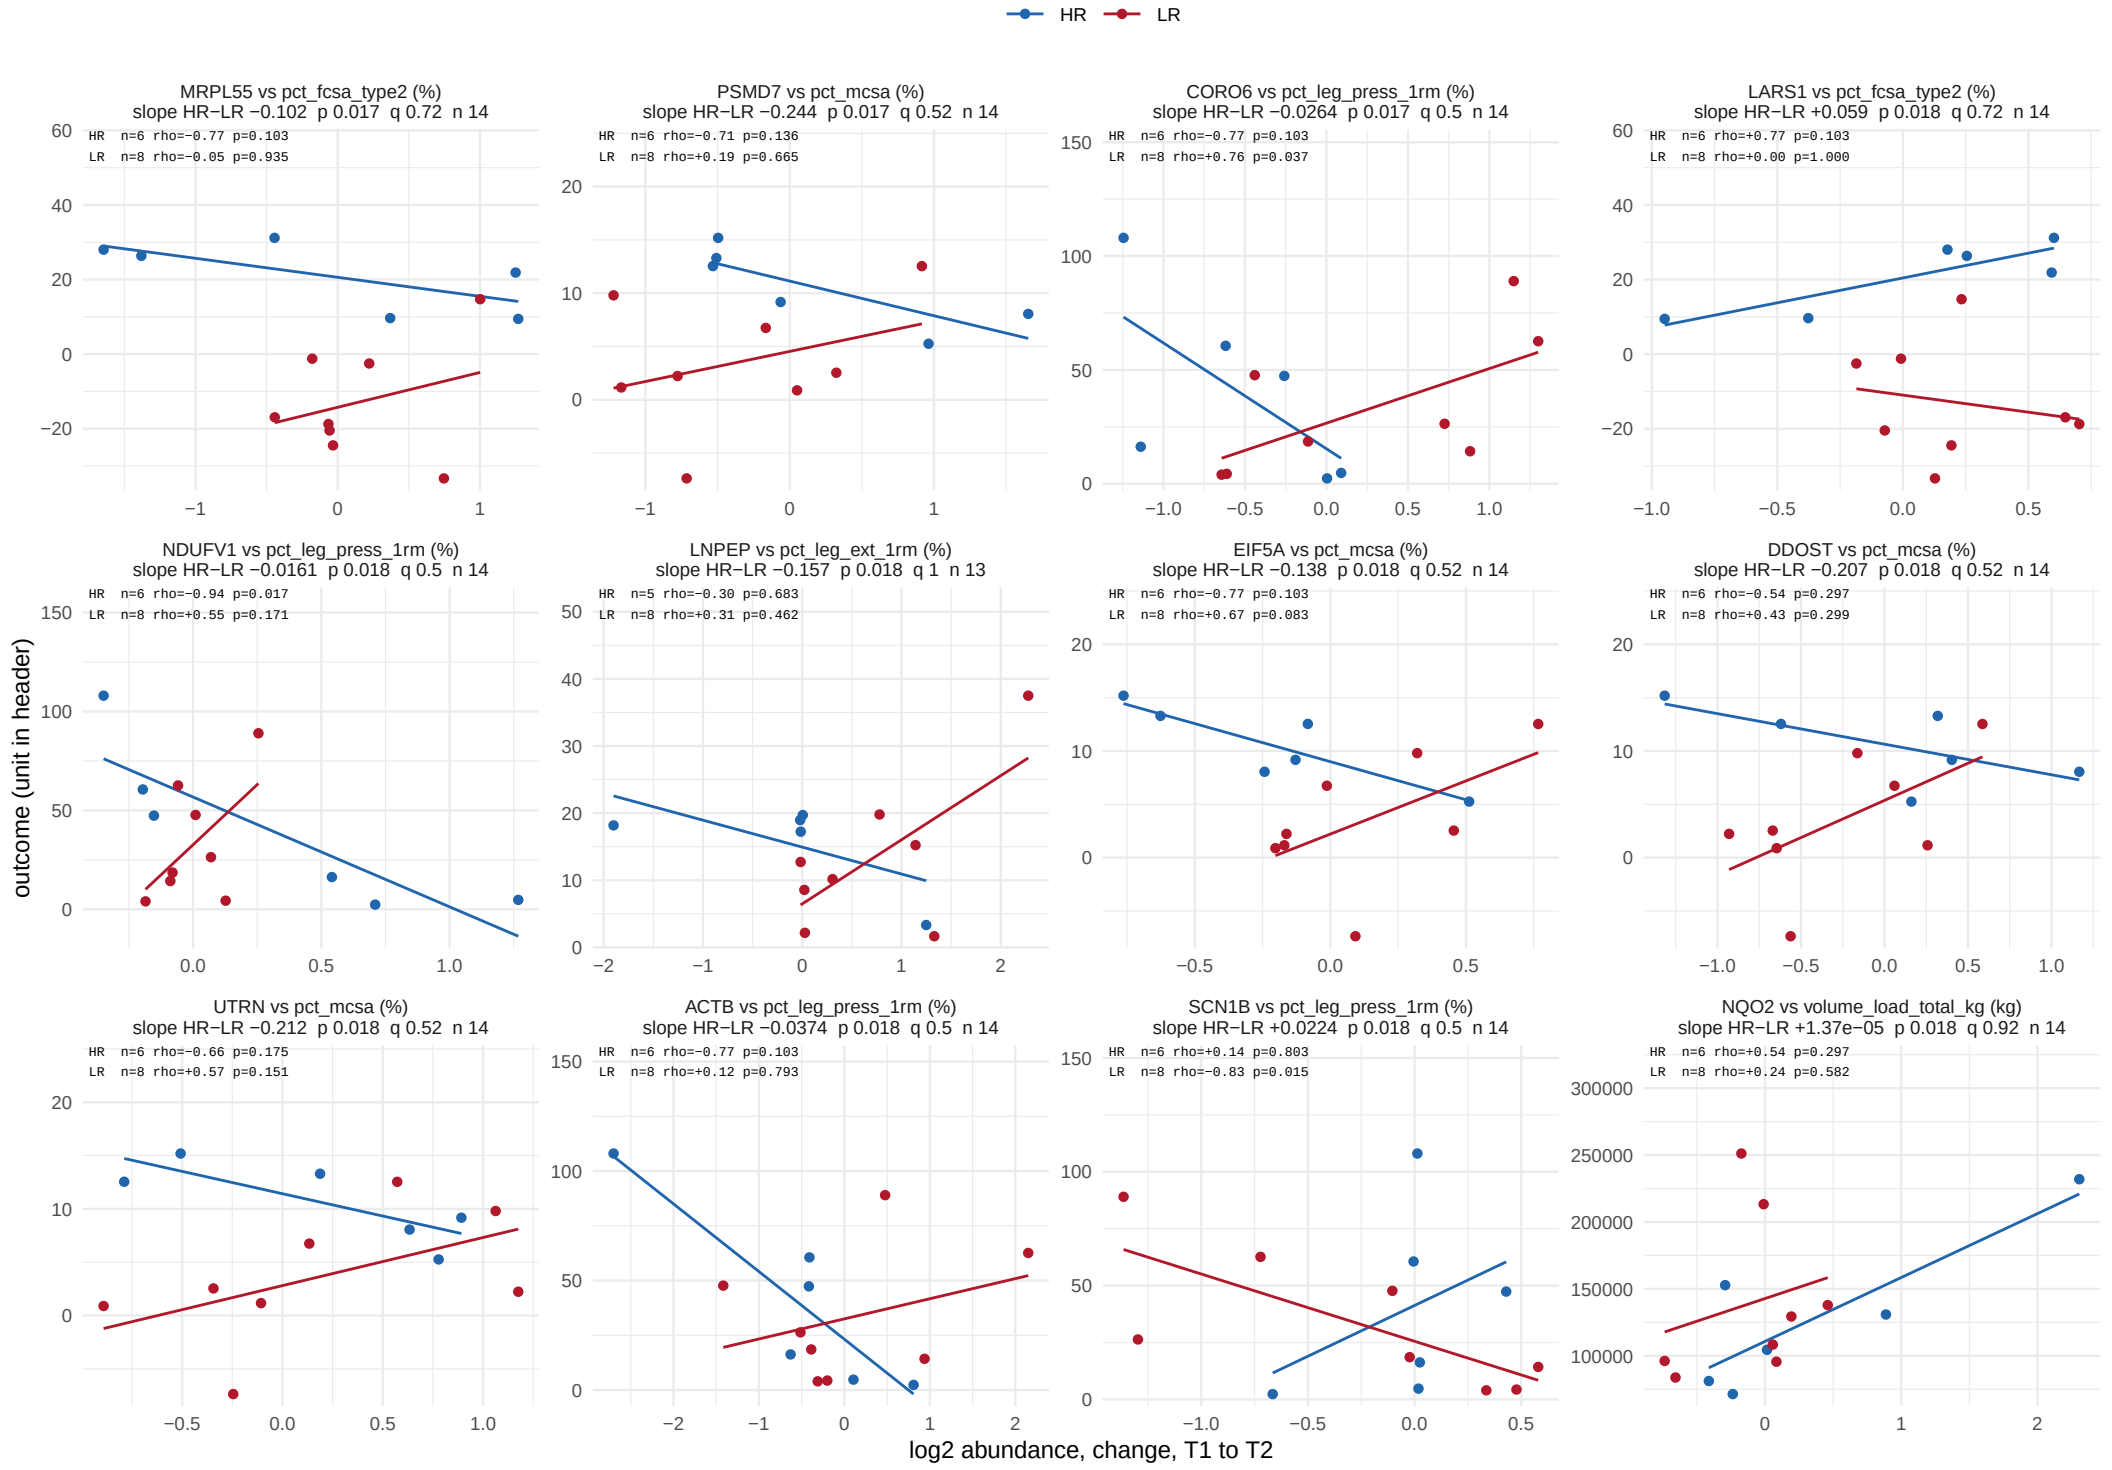

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


665 of 13300 feature−outcome pairs at p < 0.05, 11 at BH < 0.05. Page 23 of 56.

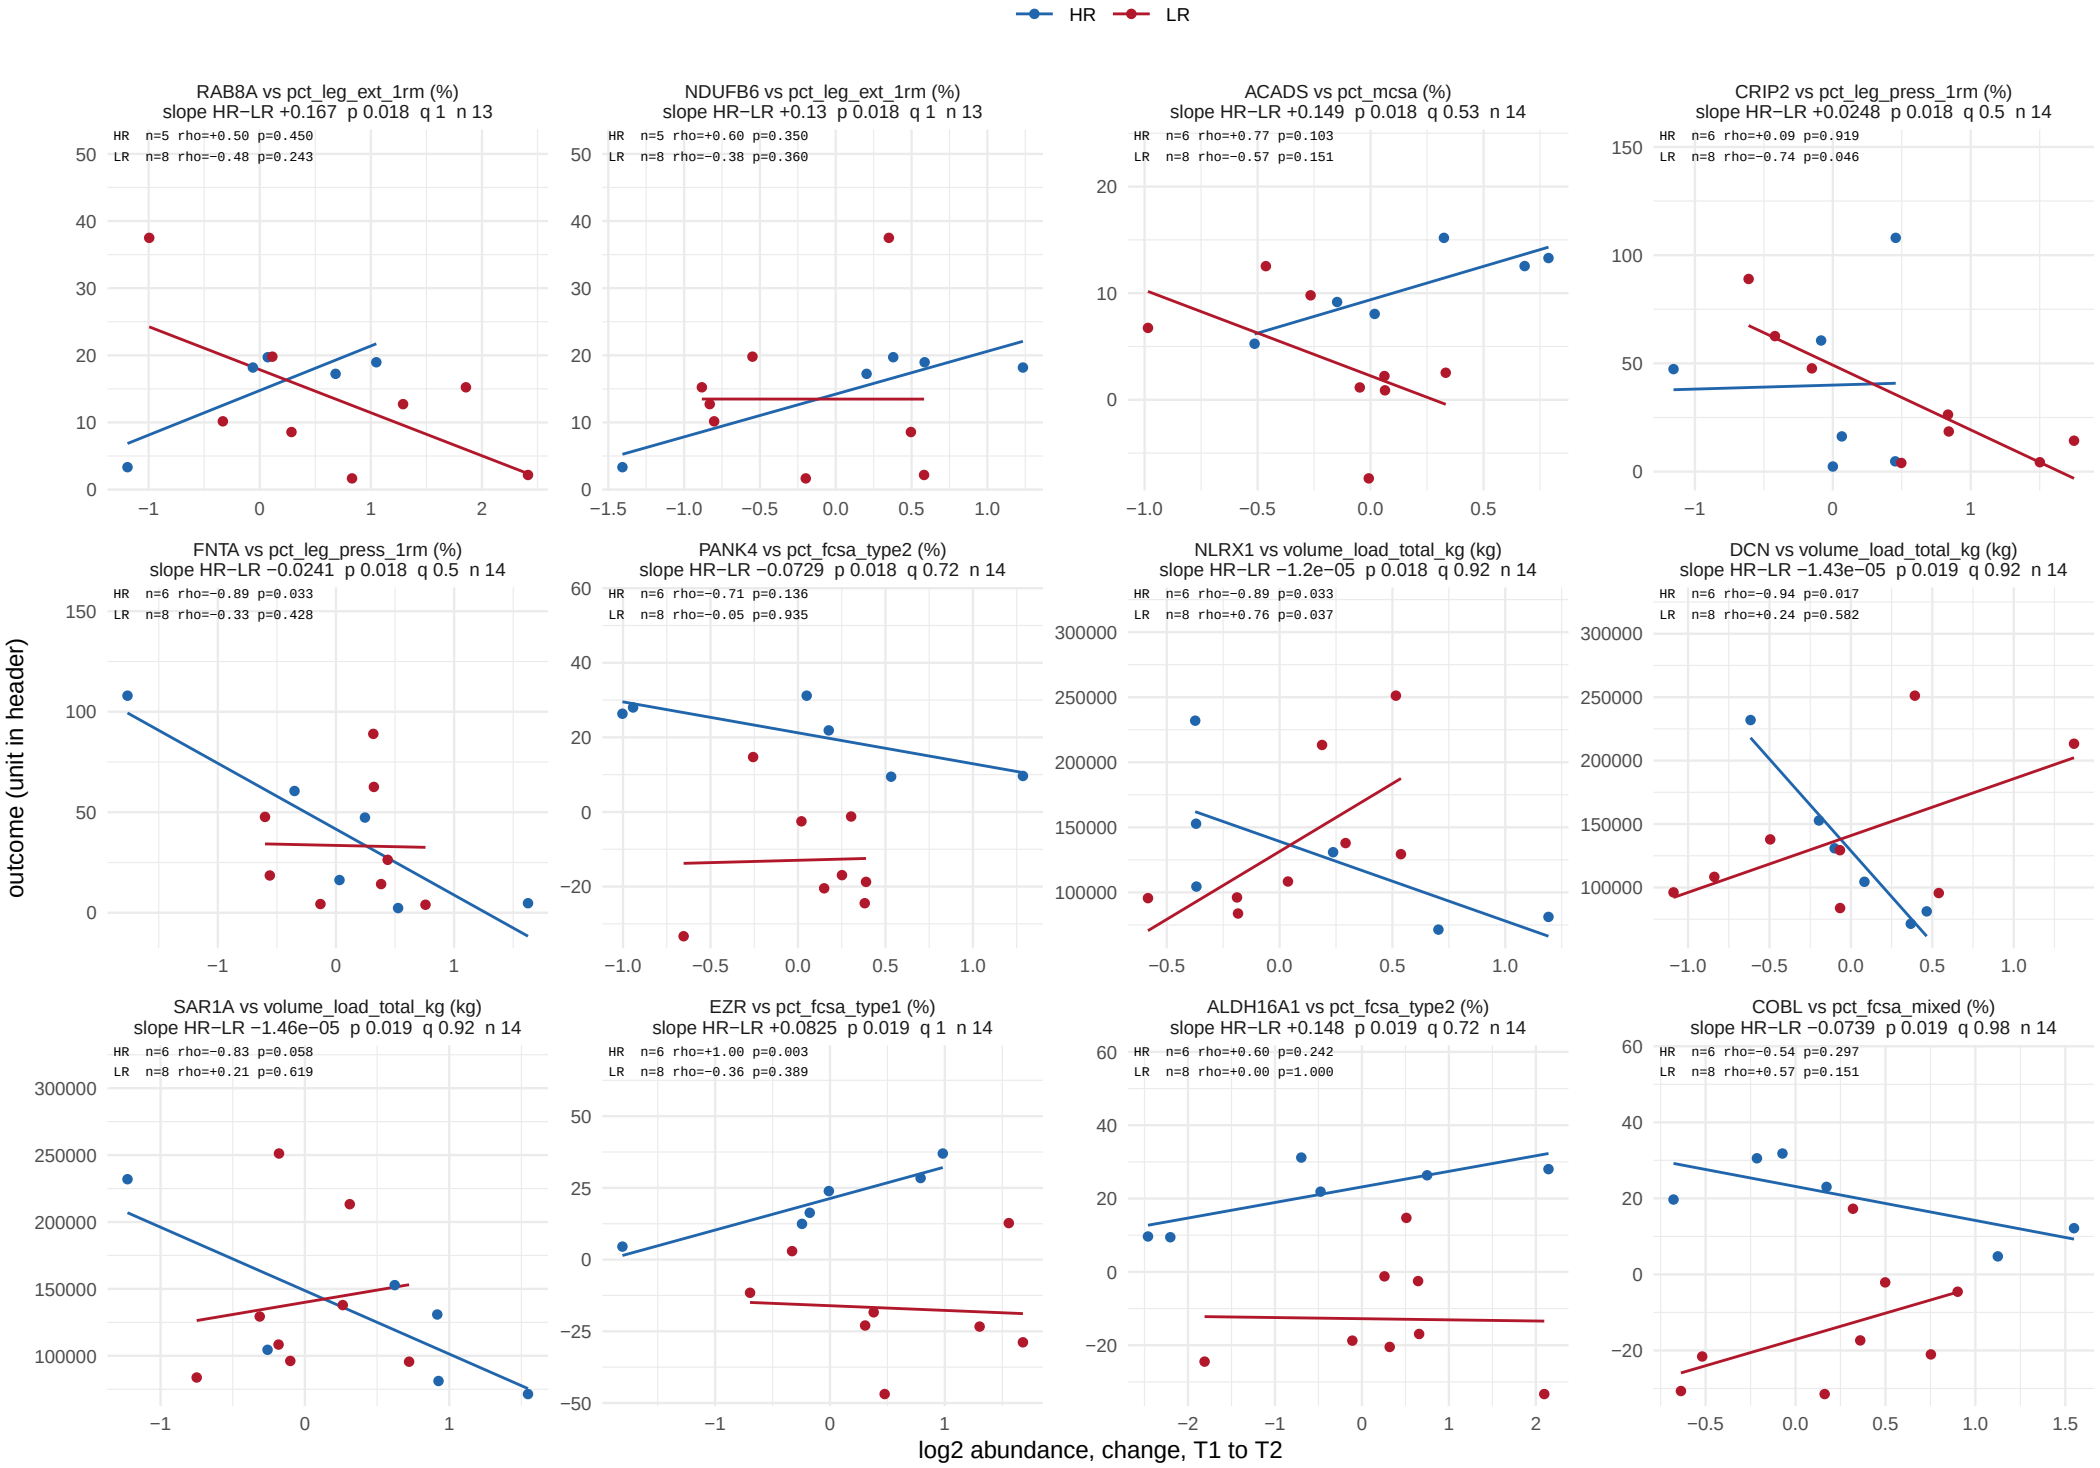

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


665 of 13300 feature−outcome pairs at p < 0.05, 11 at BH < 0.05. Page 24 of 56.

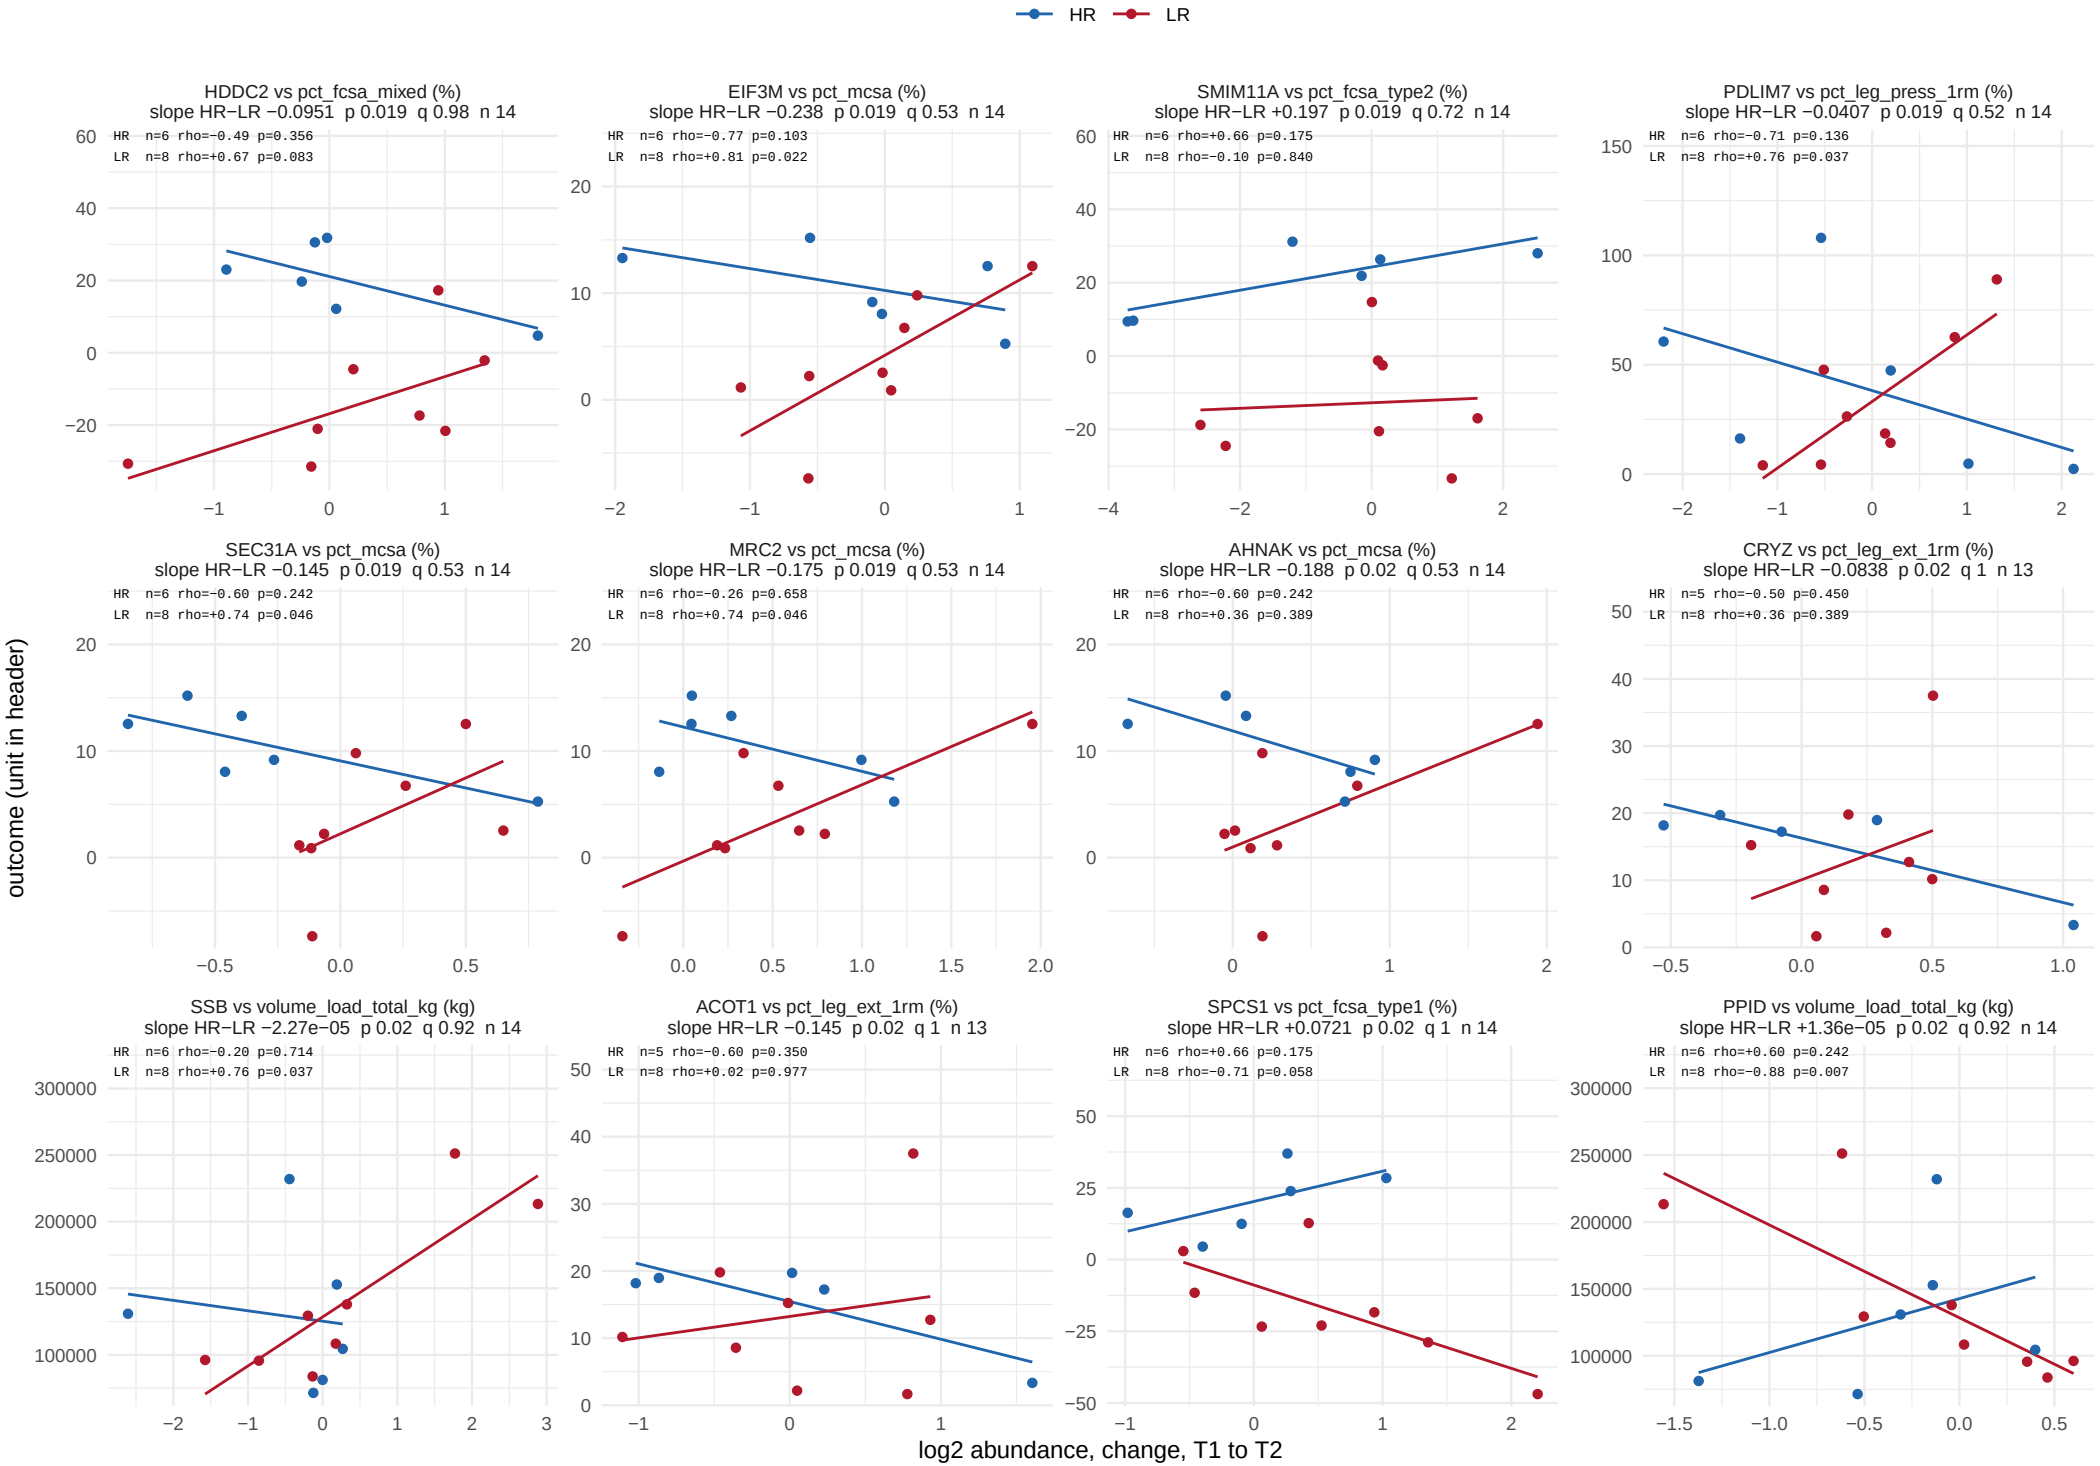

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


665 of 13300 feature−outcome pairs at p < 0.05, 11 at BH < 0.05. Page 25 of 56.

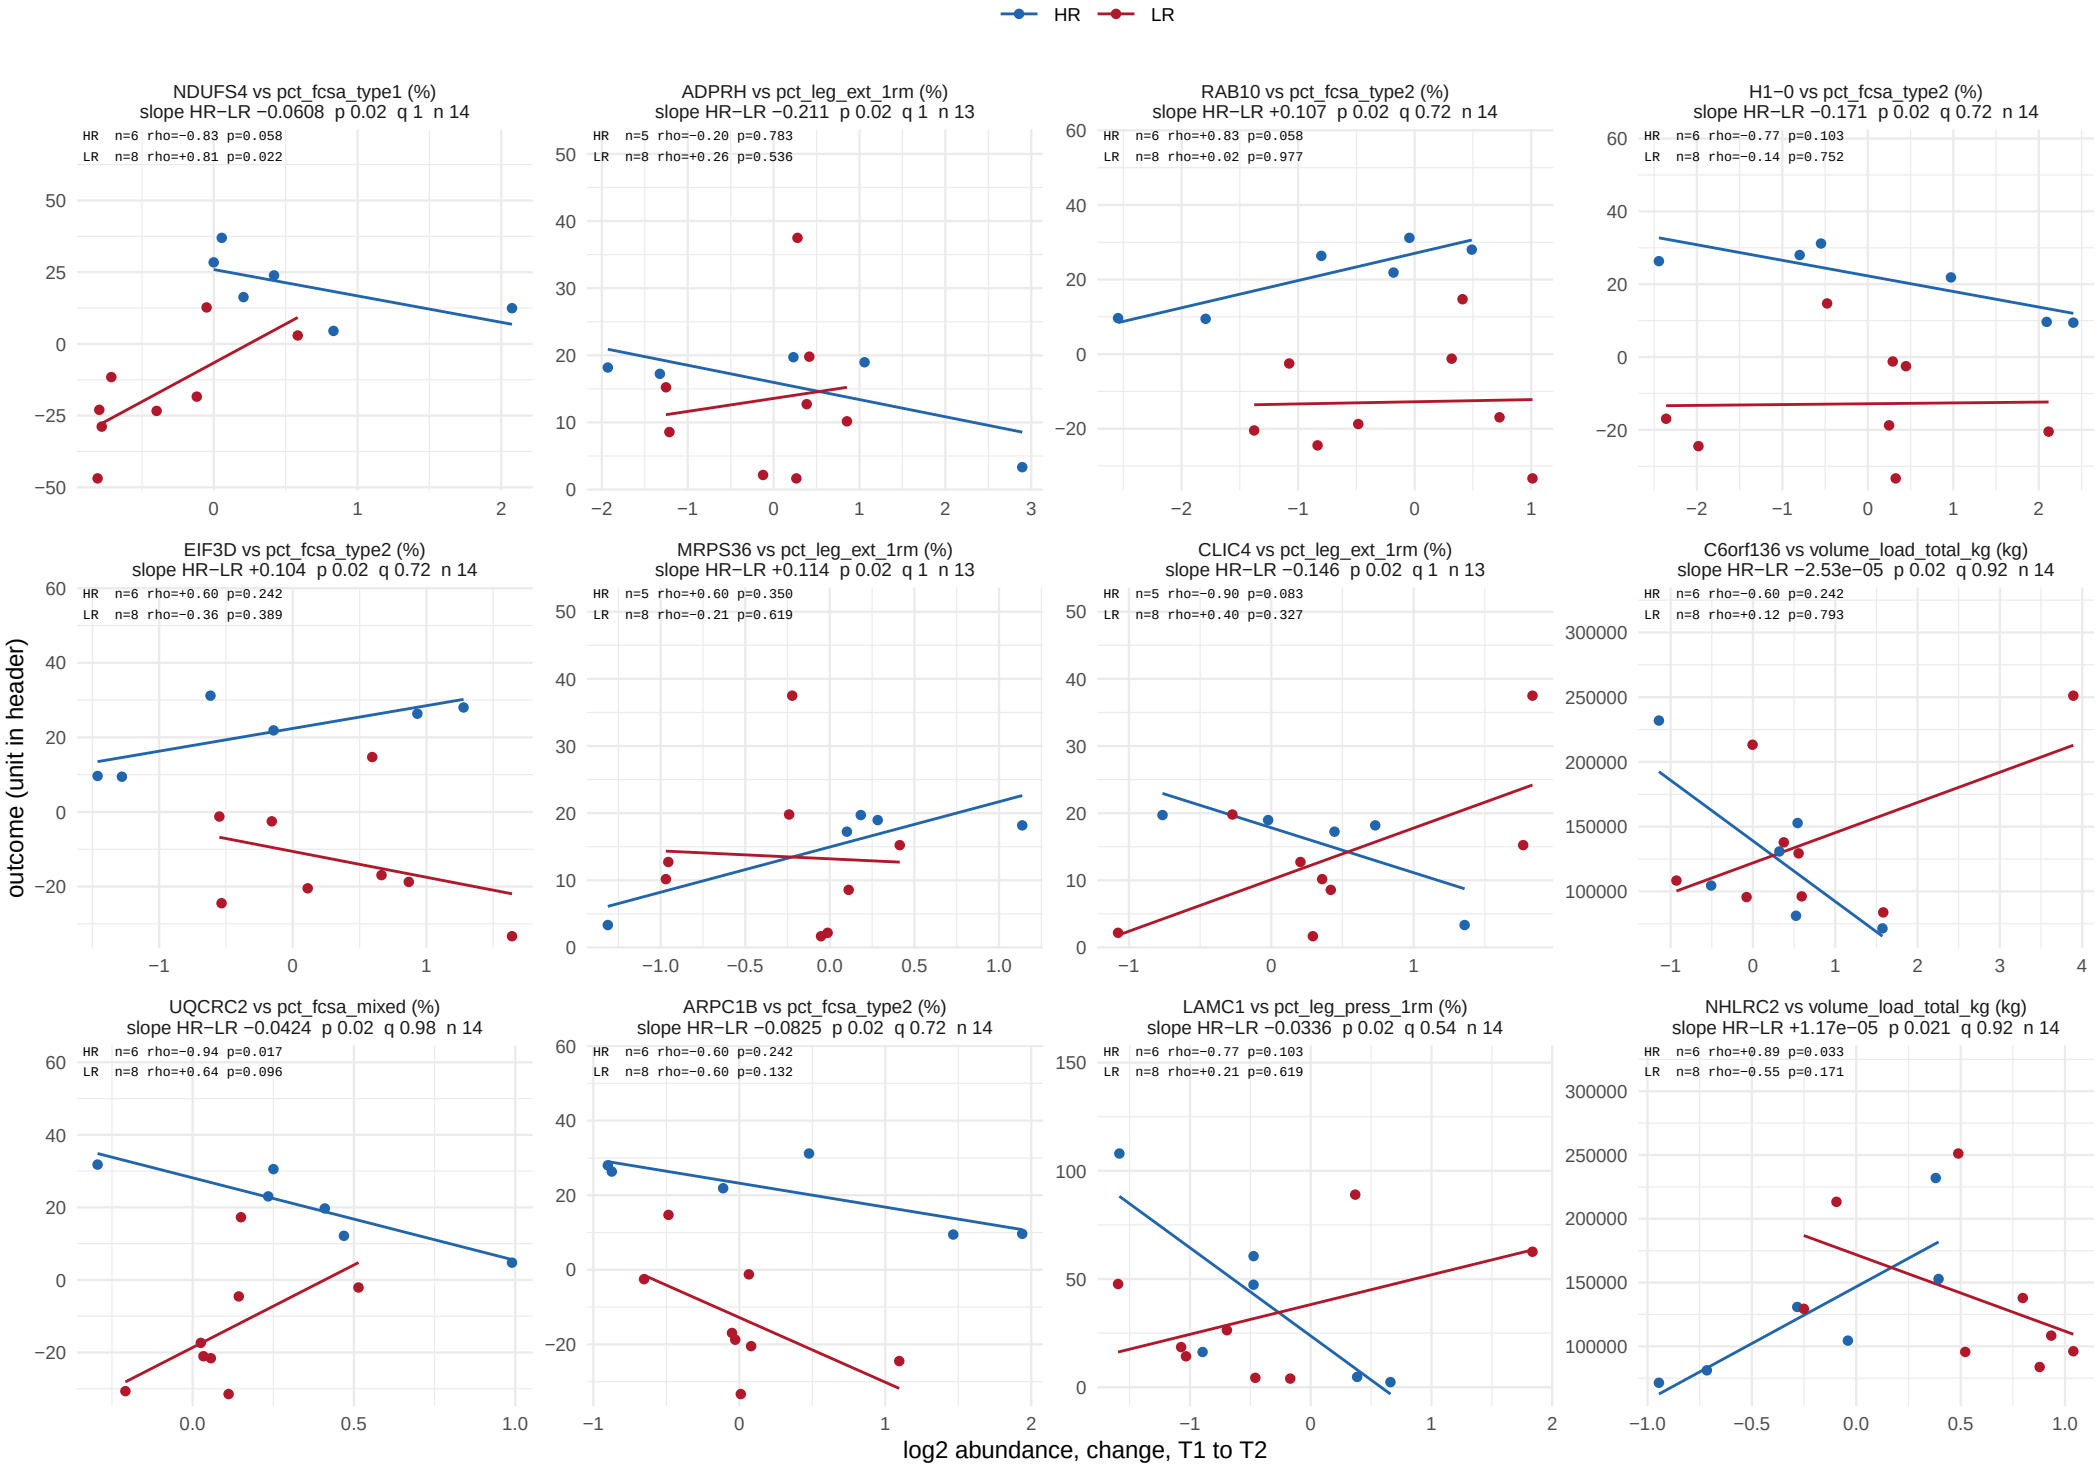

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


665 of 13300 feature−outcome pairs at p < 0.05, 11 at BH < 0.05. Page 26 of 56.

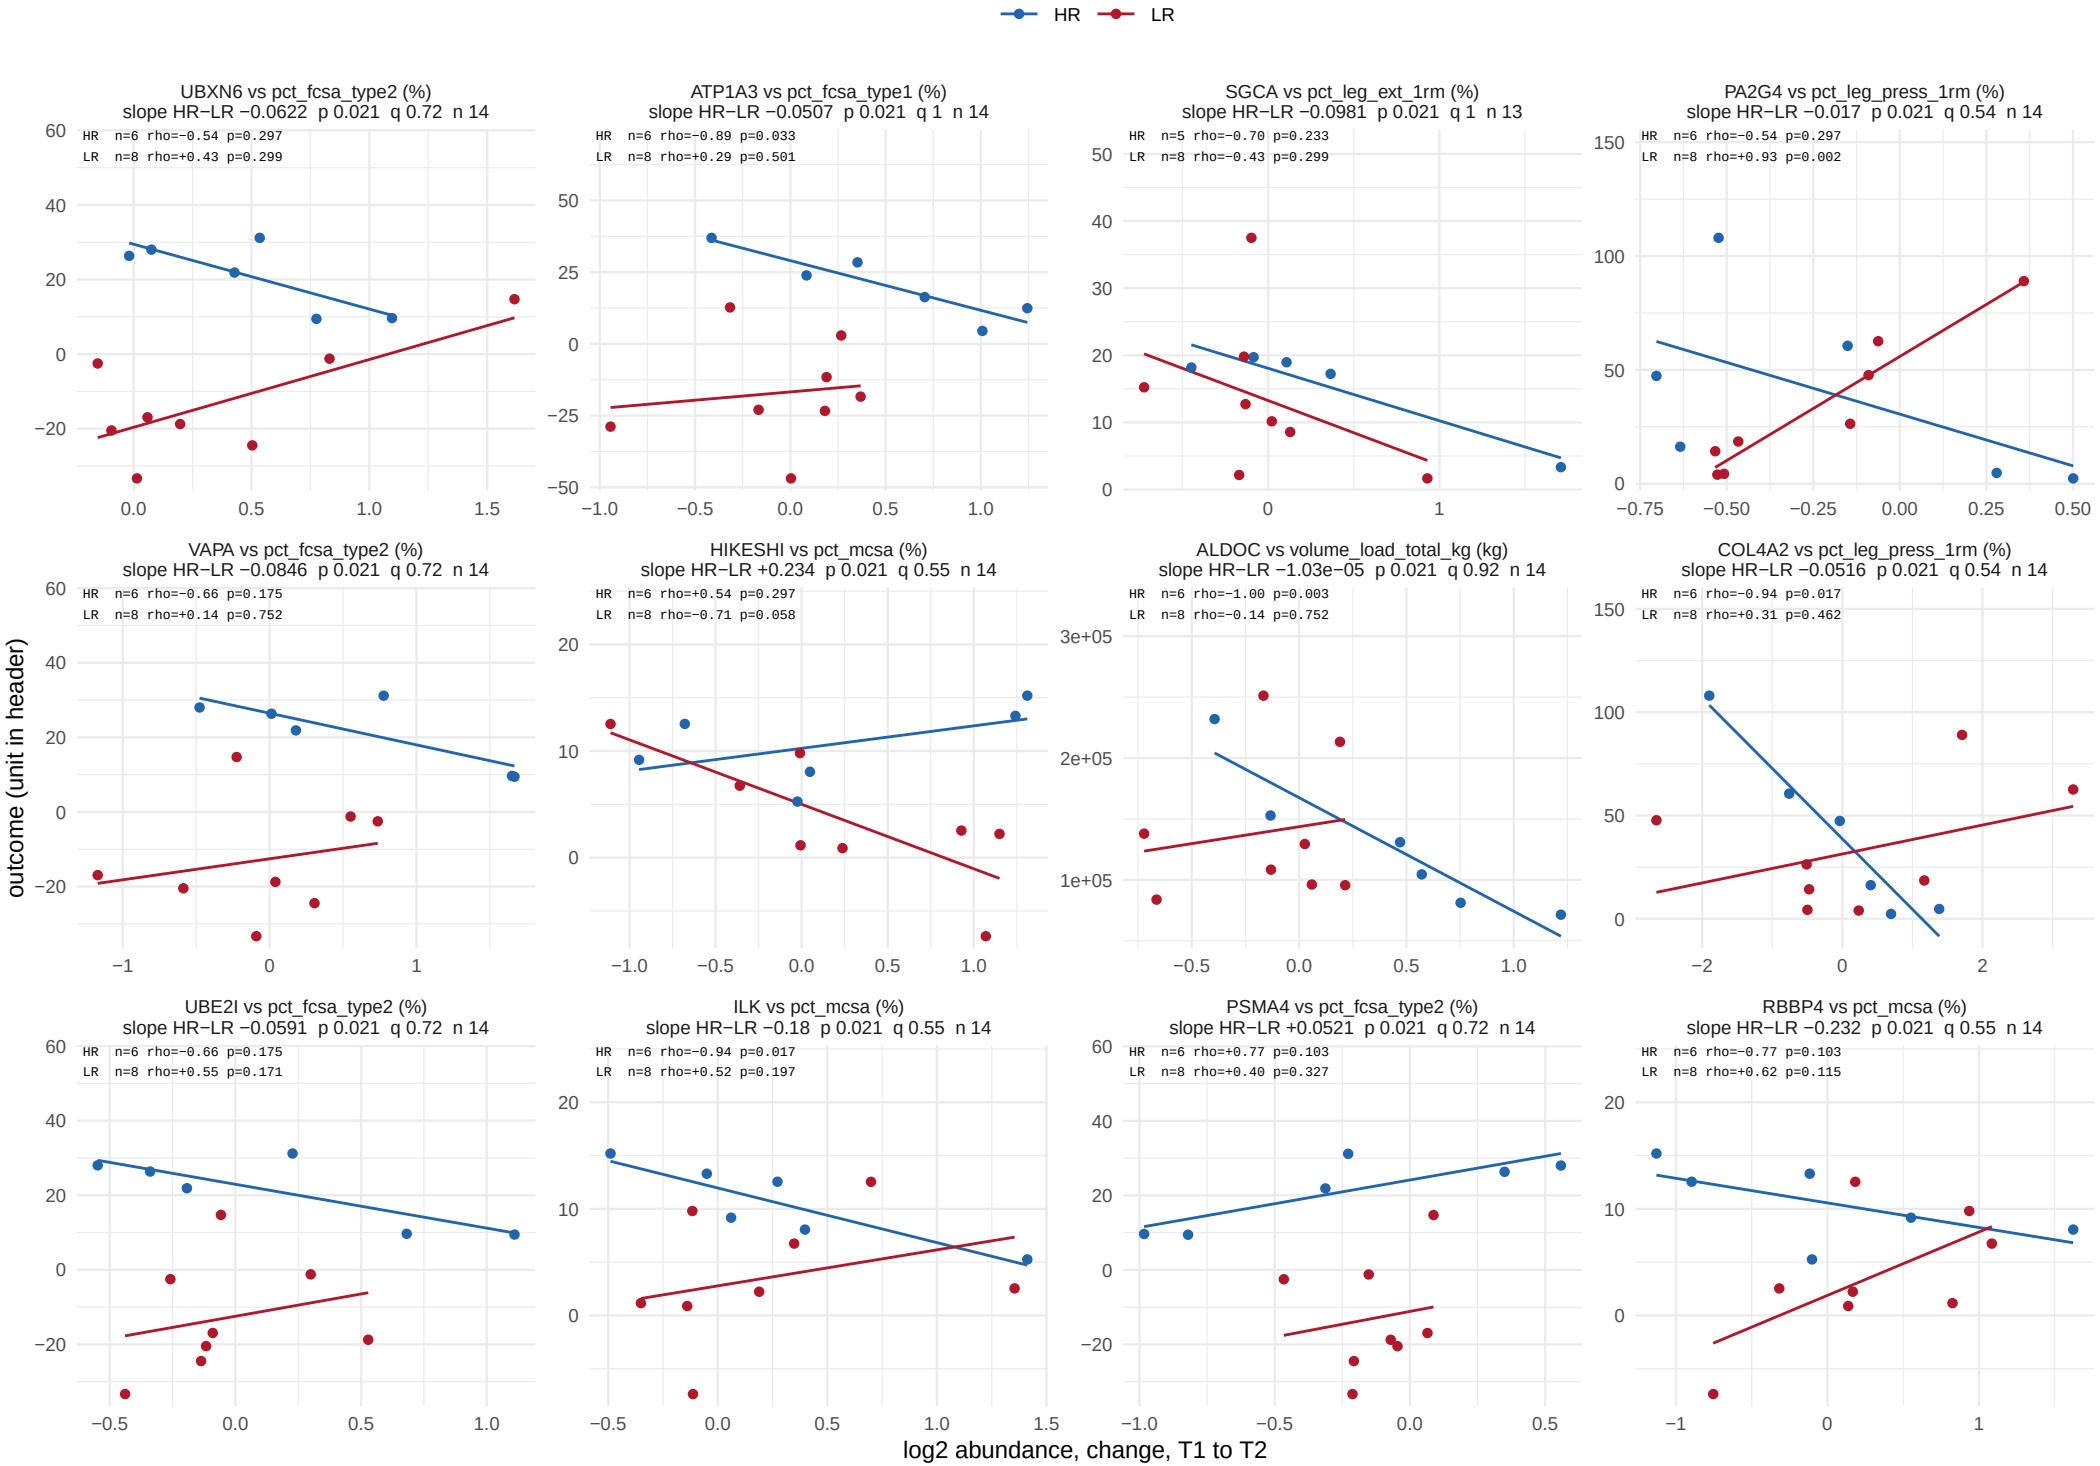

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


665 of 13300 feature−outcome pairs at p < 0.05, 11 at BH < 0.05. Page 27 of 56.

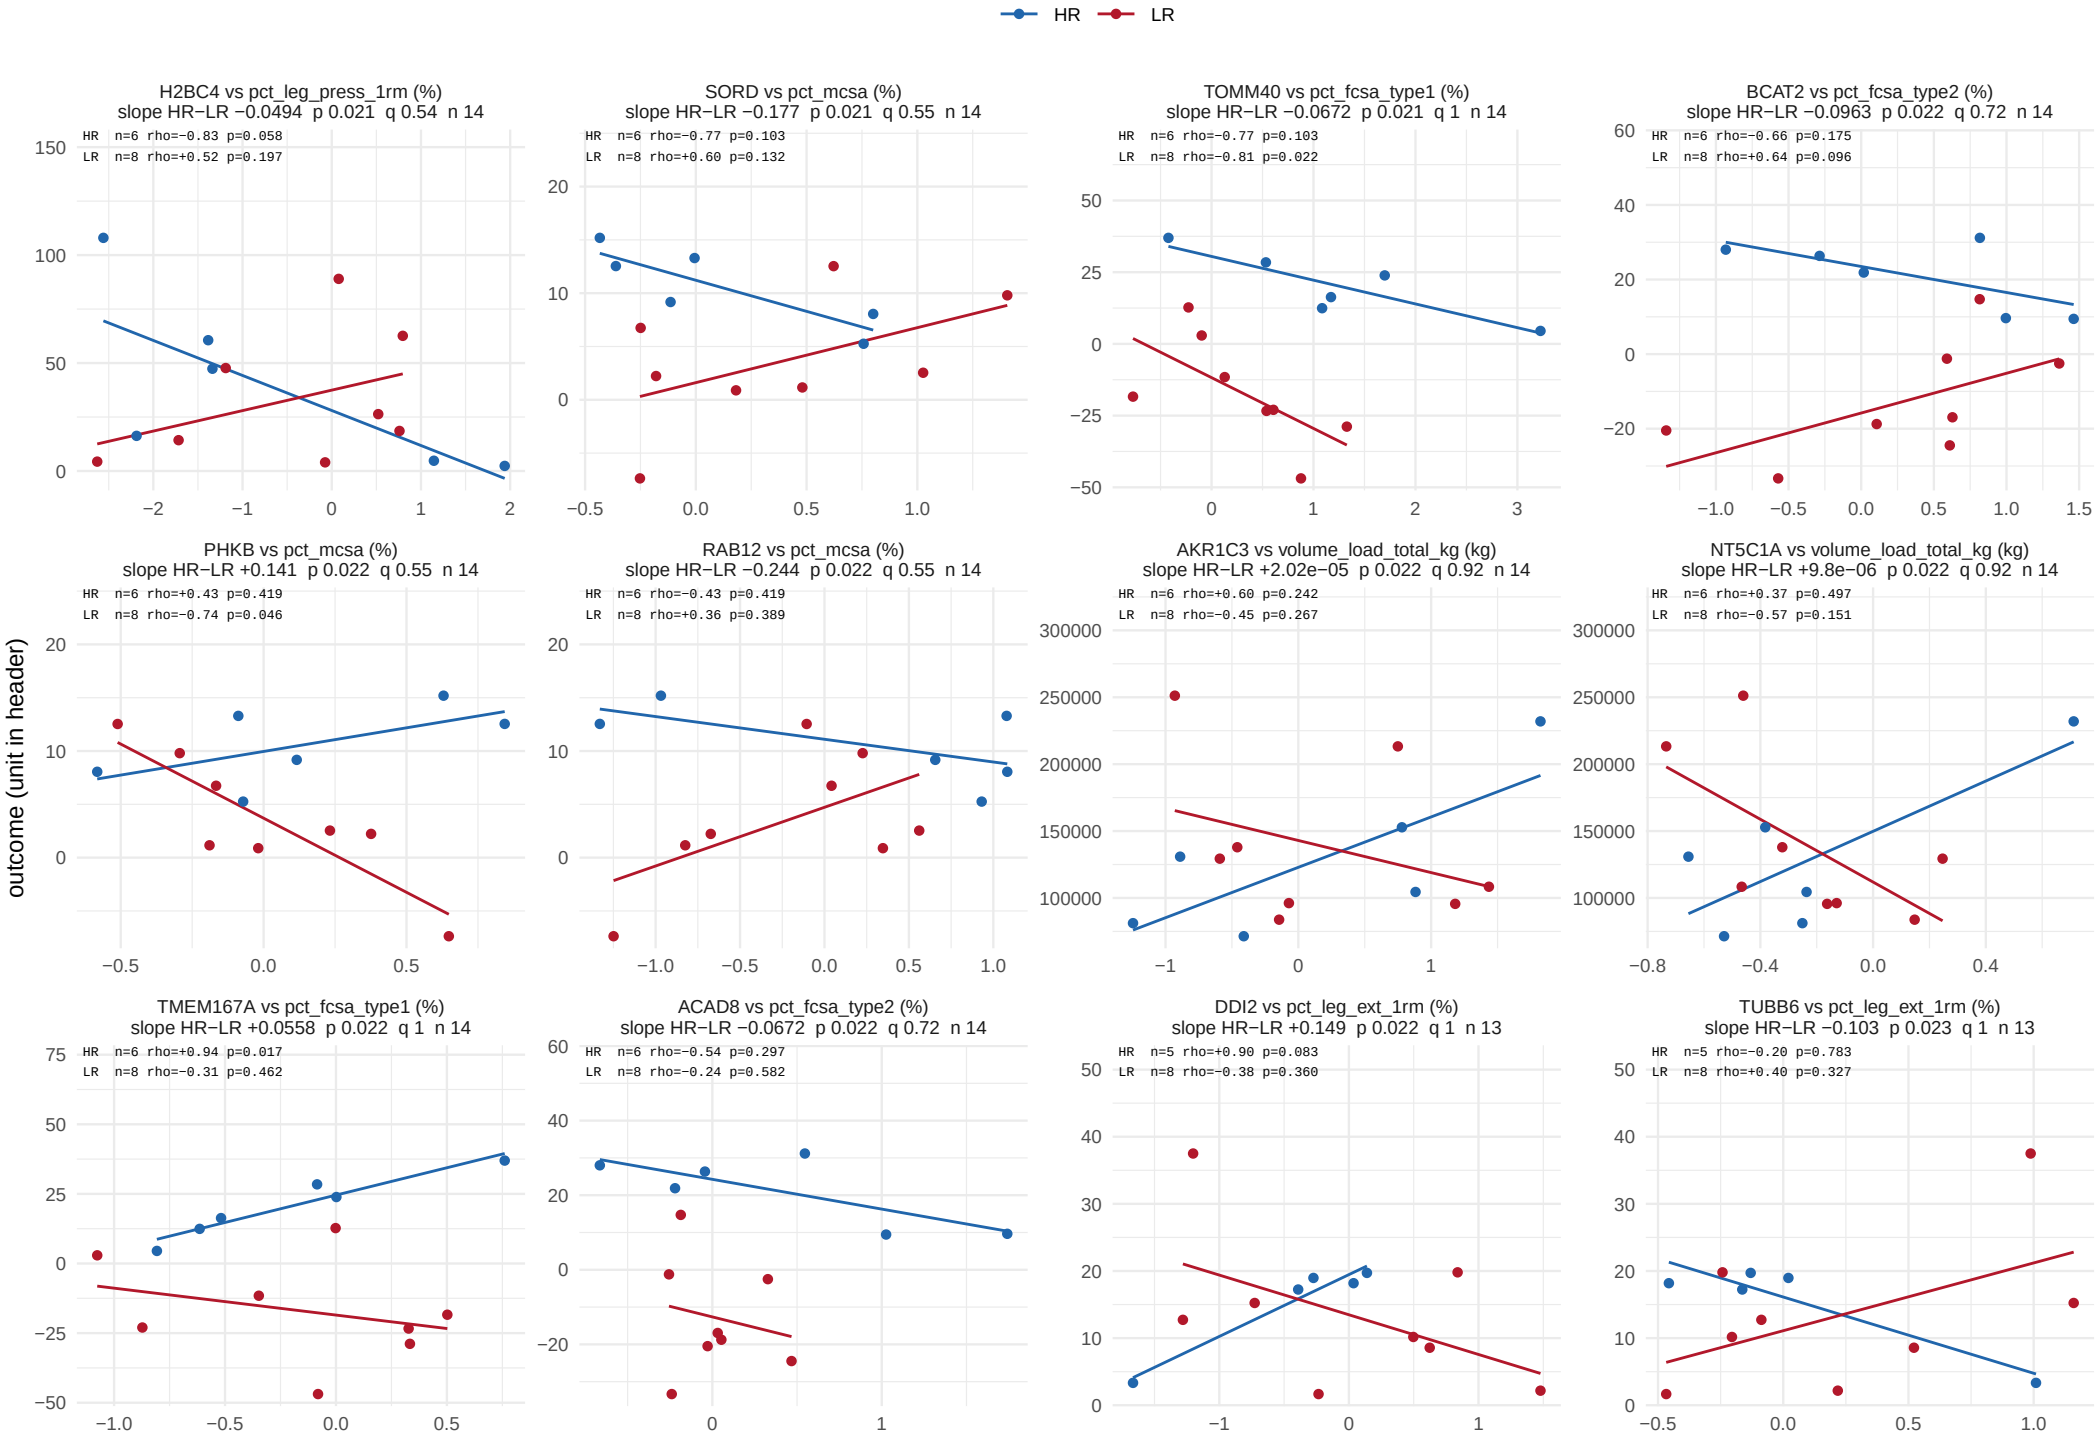

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


665 of 13300 feature−outcome pairs at p < 0.05, 11 at BH < 0.05. Page 28 of 56.

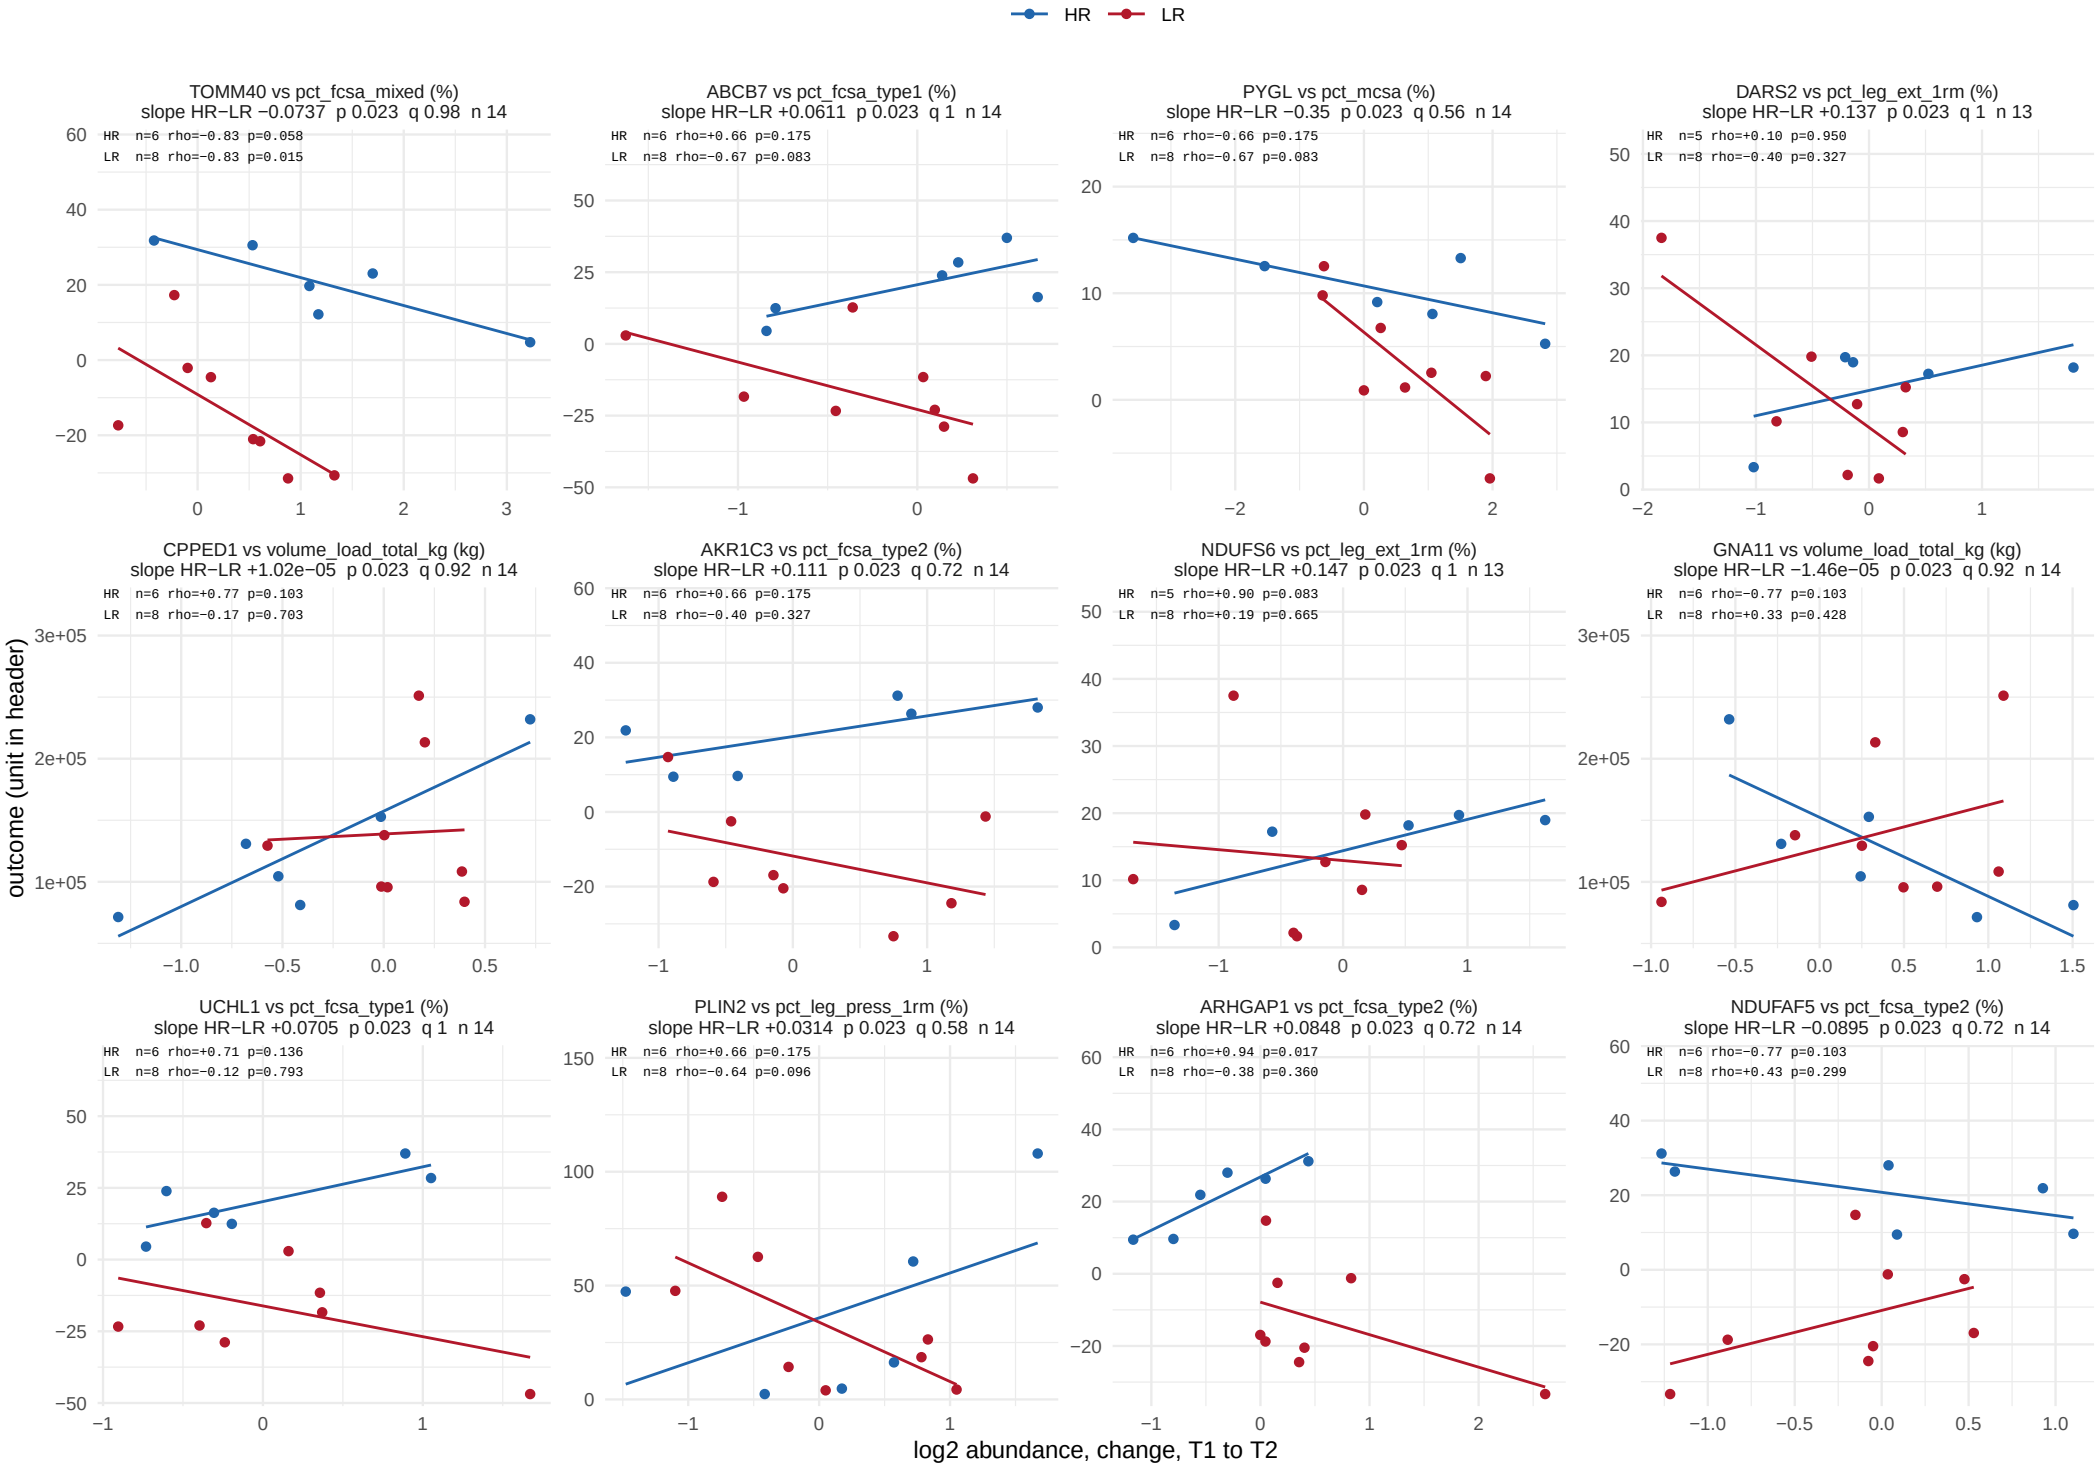

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


665 of 13300 feature−outcome pairs at p < 0.05, 11 at BH < 0.05. Page 29 of 56.

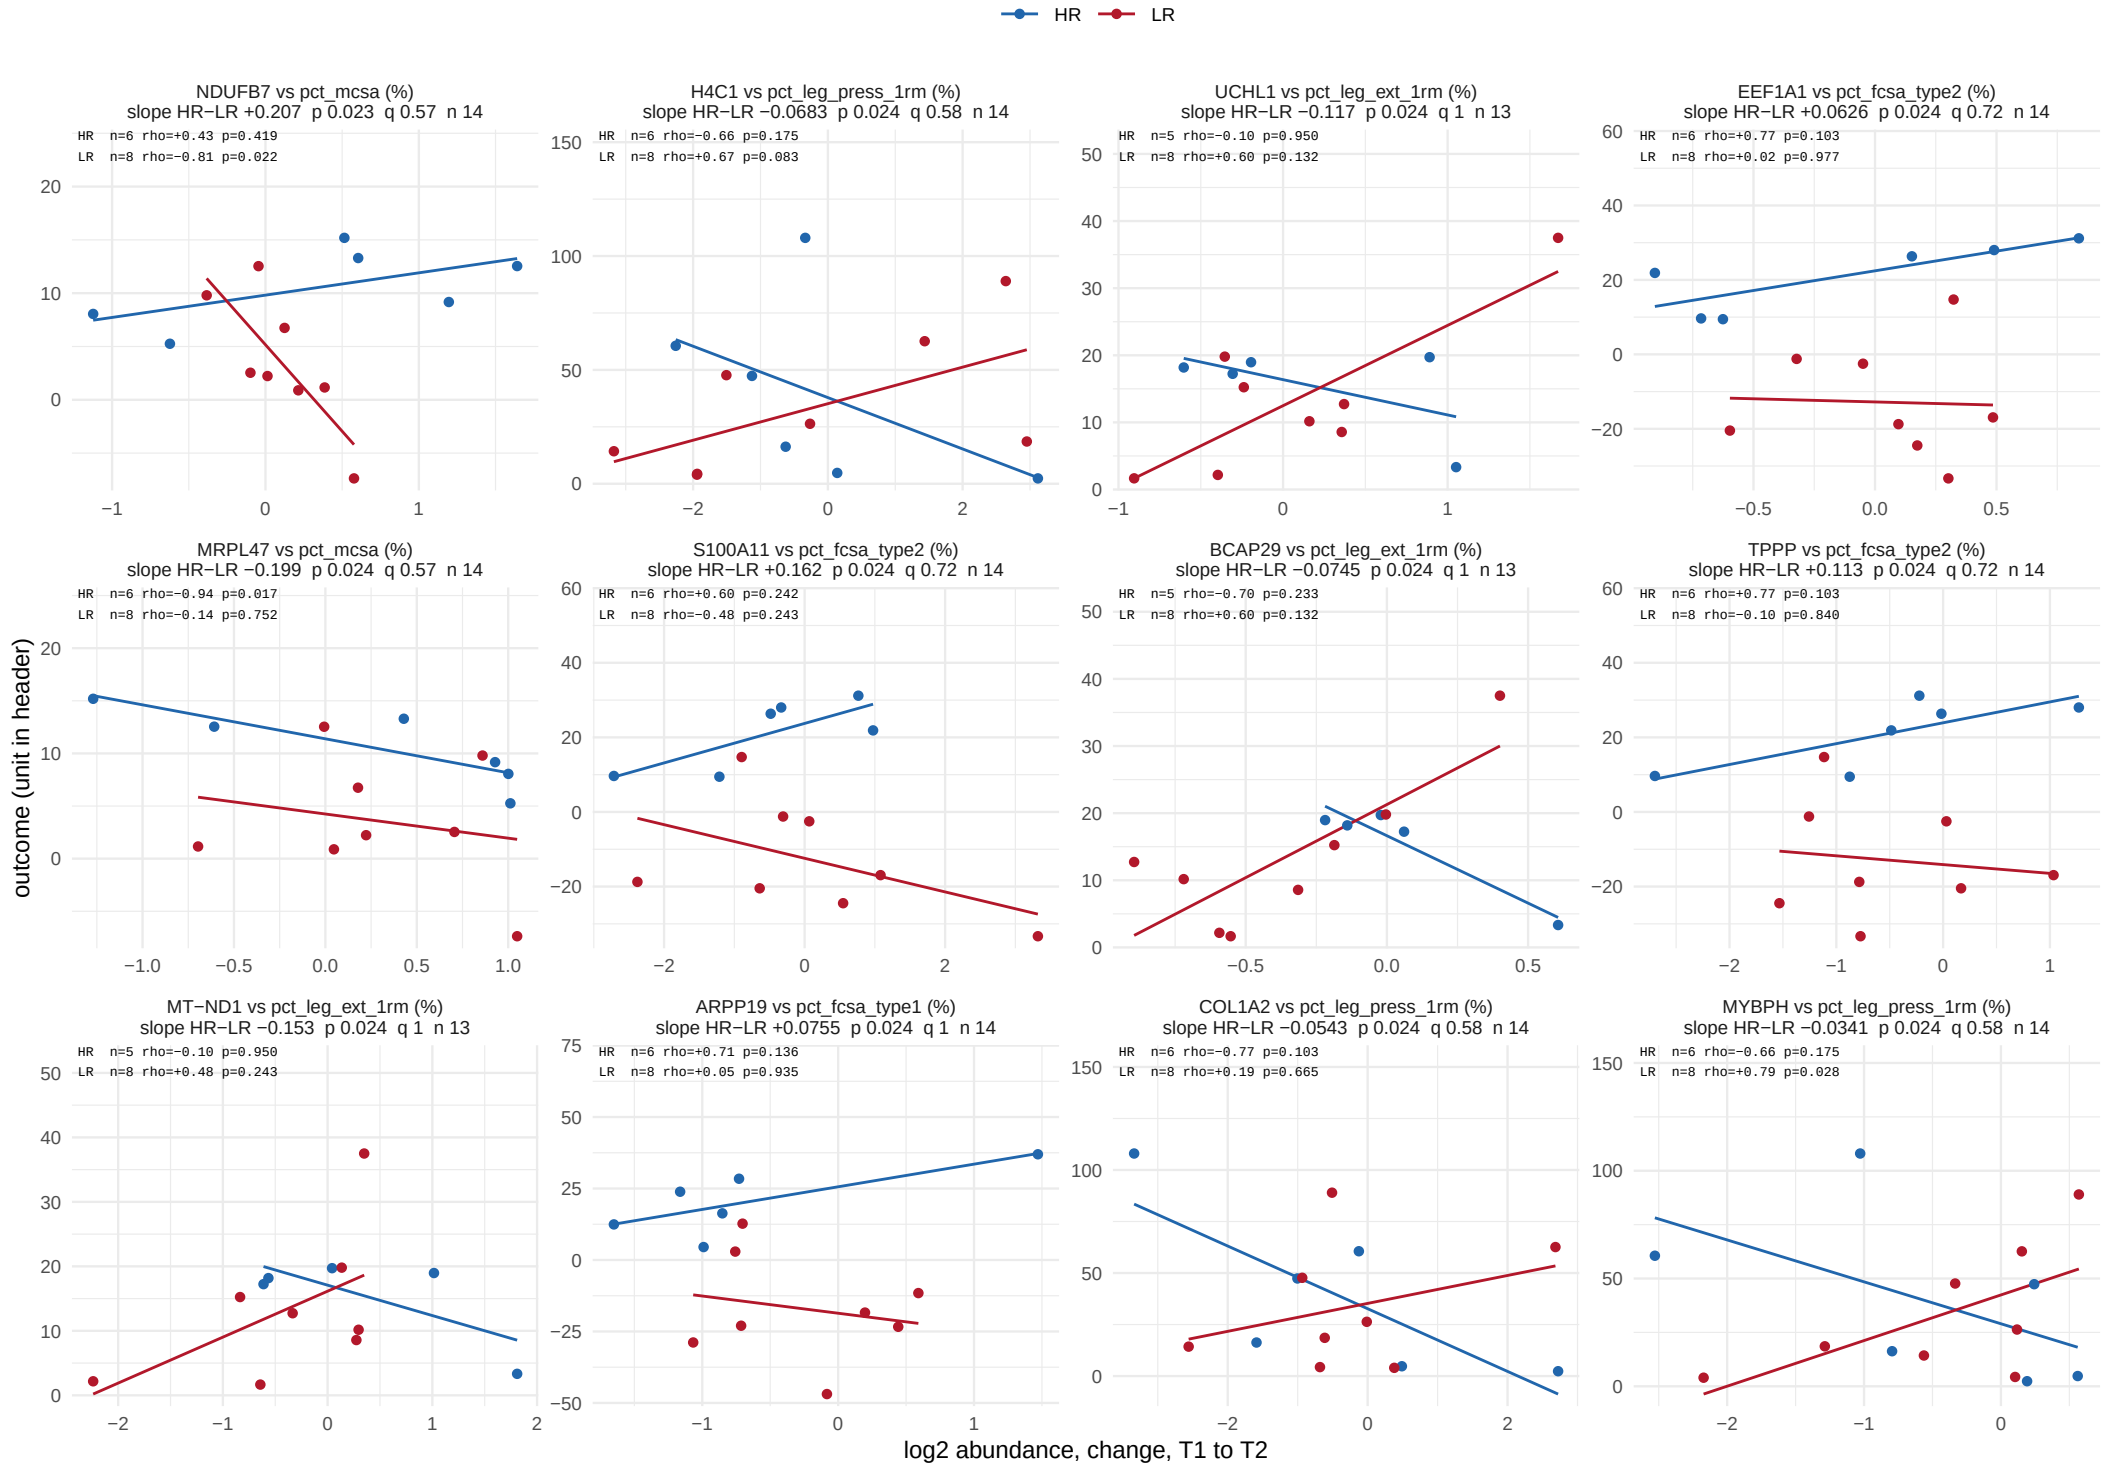

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


665 of 13300 feature−outcome pairs at p < 0.05, 11 at BH < 0.05. Page 30 of 56.

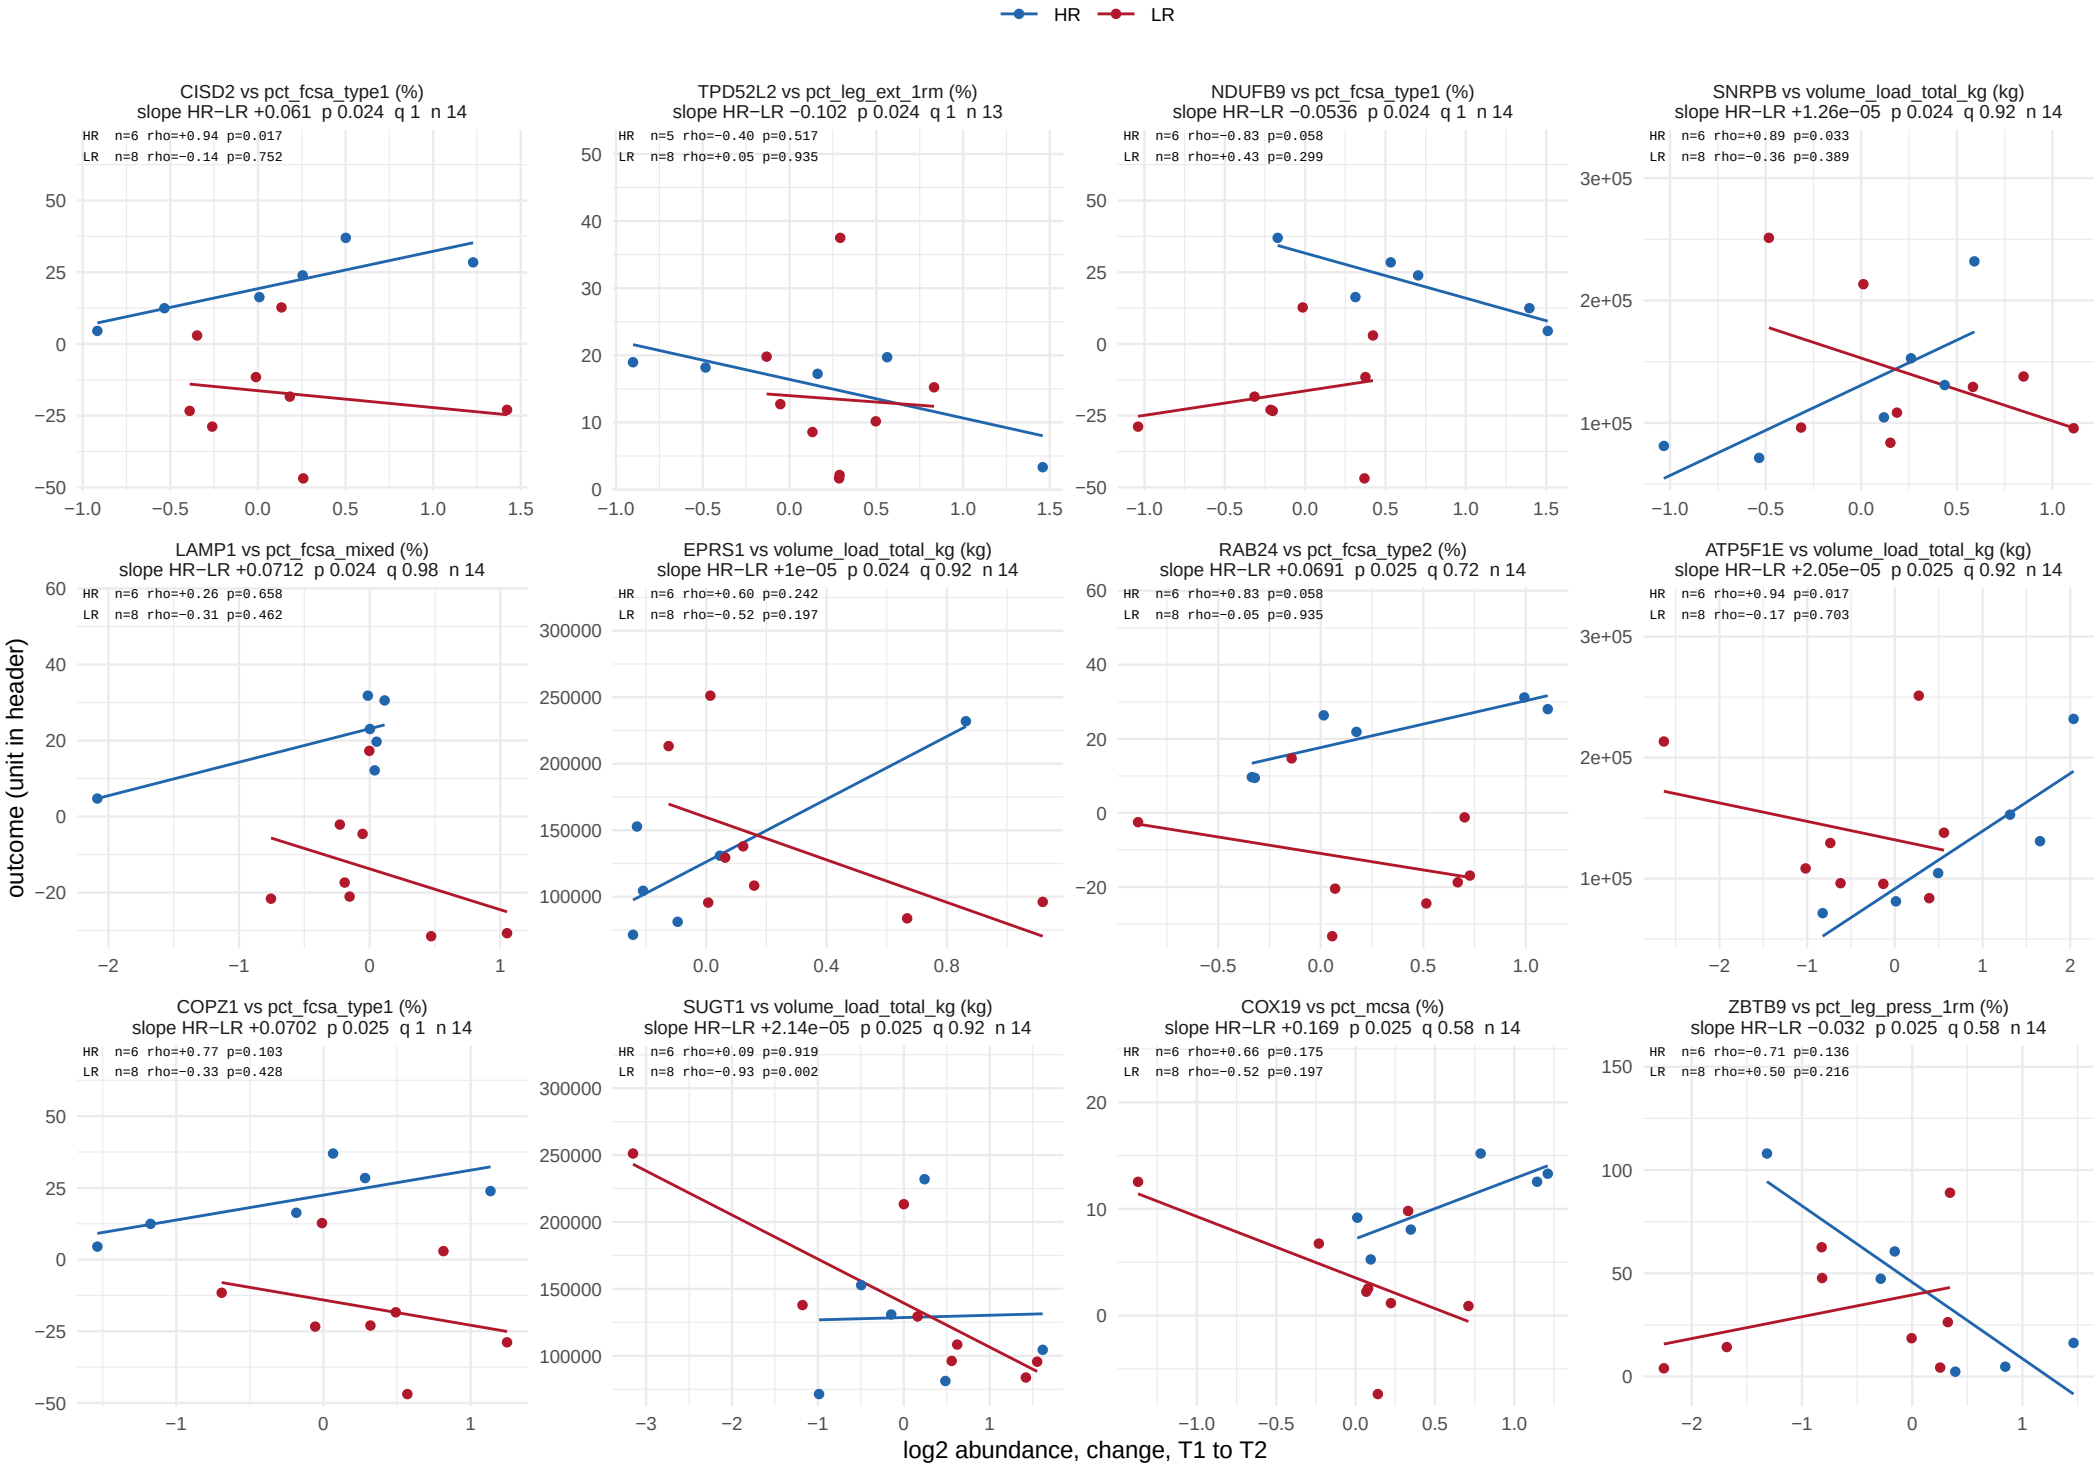

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


665 of 13300 feature−outcome pairs at p < 0.05, 11 at BH < 0.05. Page 31 of 56.

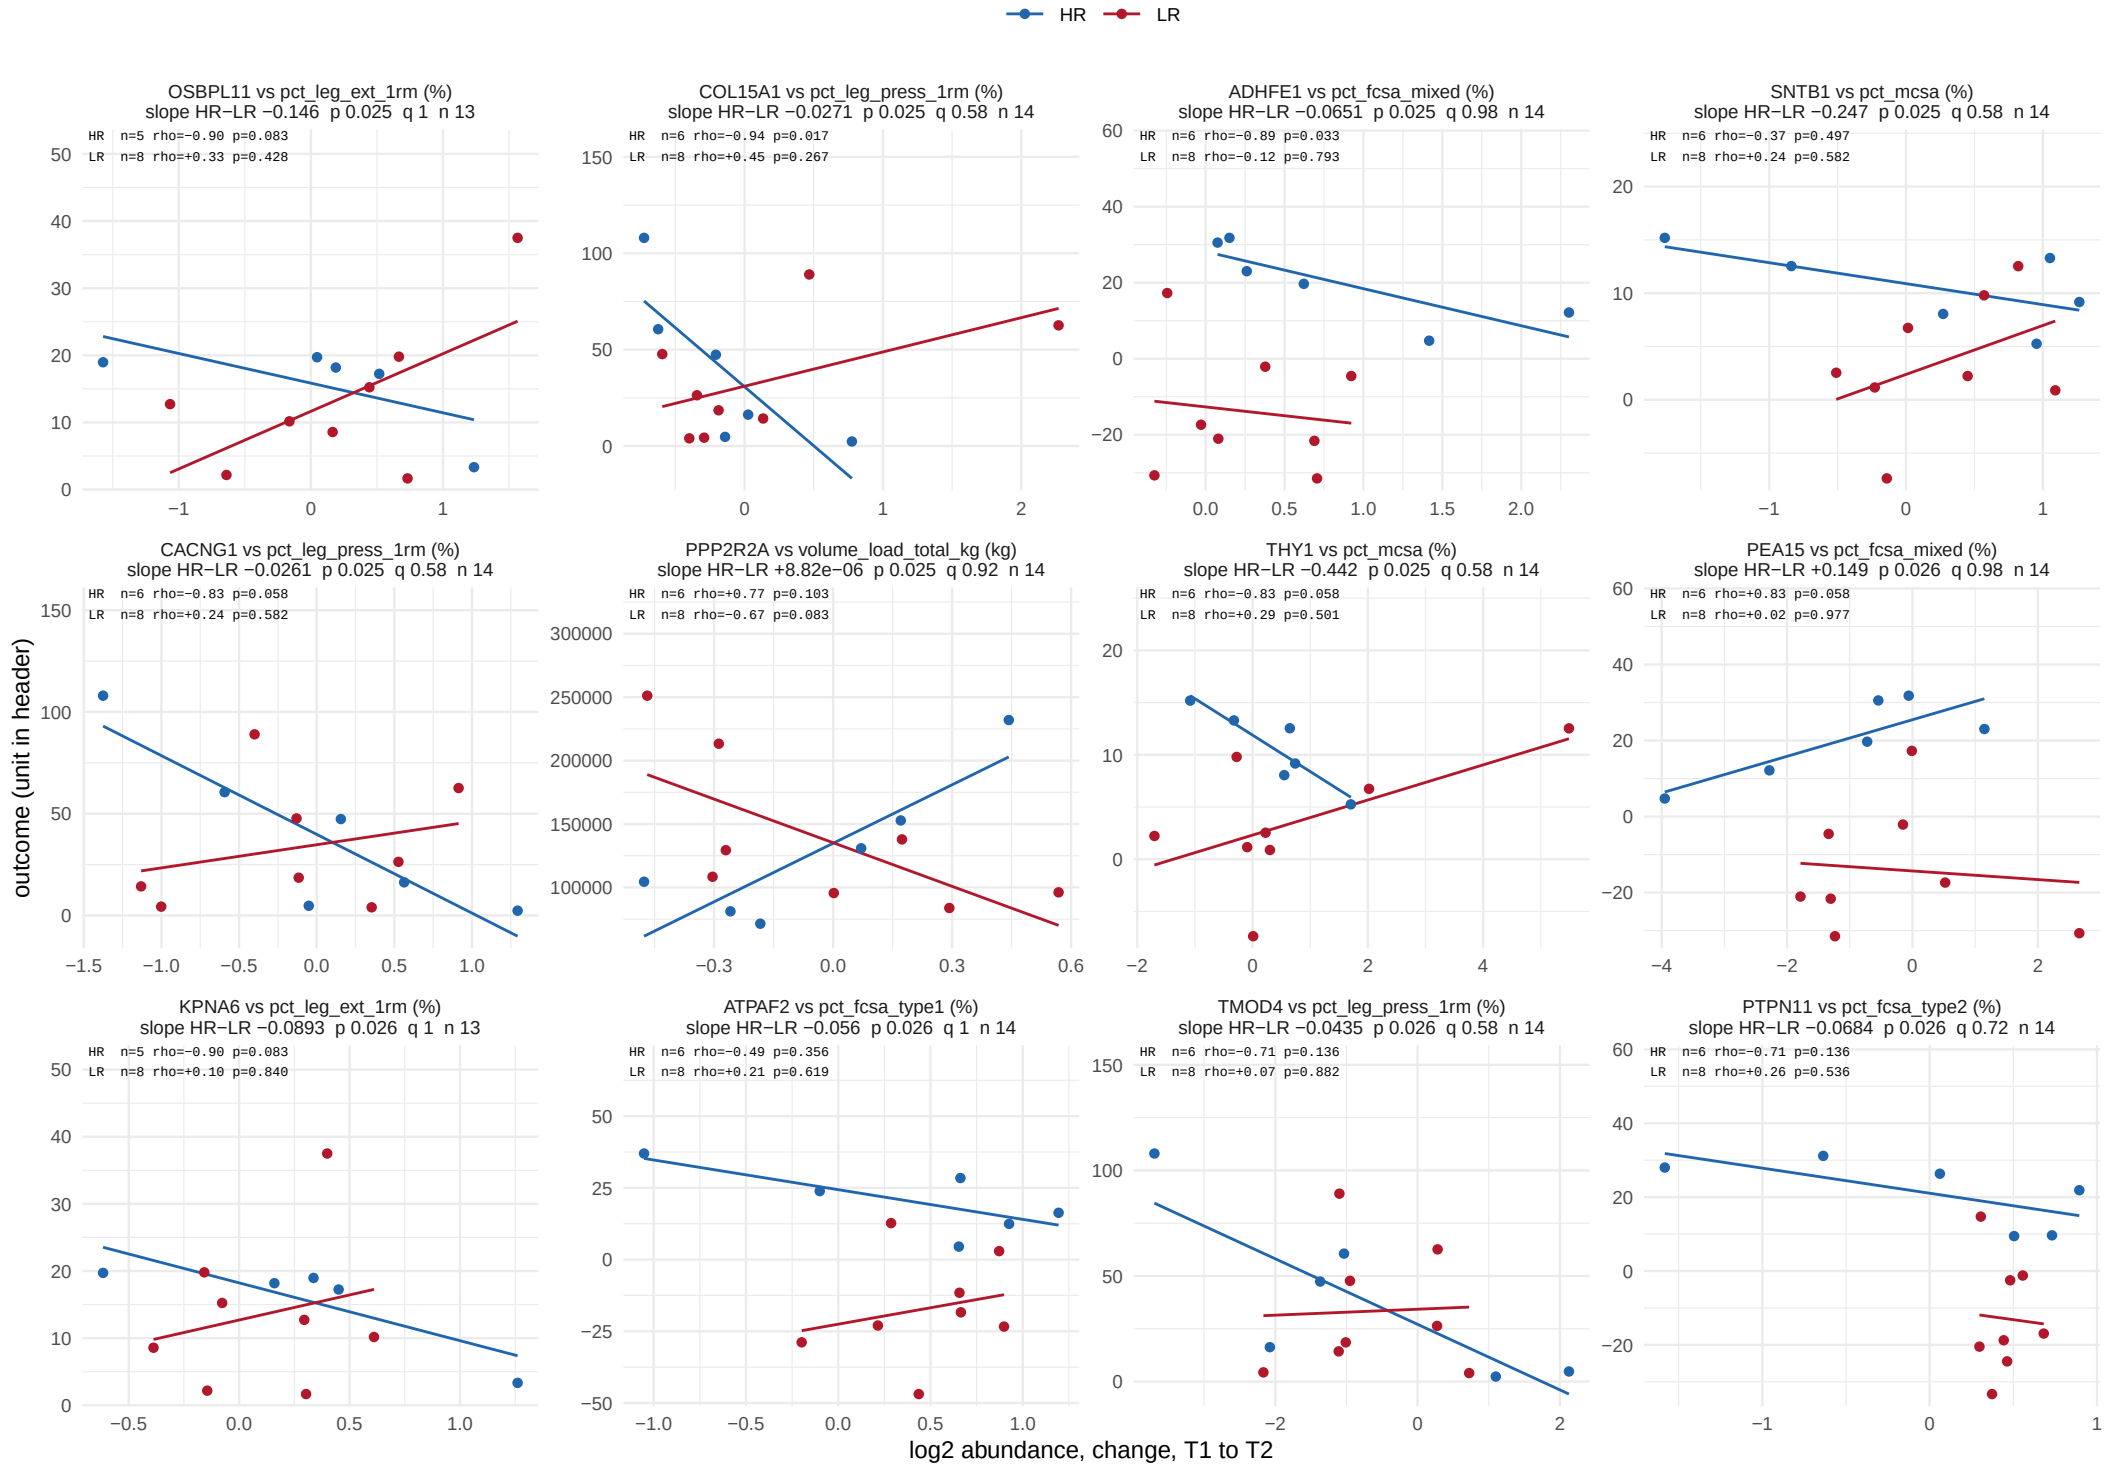

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


665 of 13300 feature−outcome pairs at p < 0.05, 11 at BH < 0.05. Page 32 of 56.

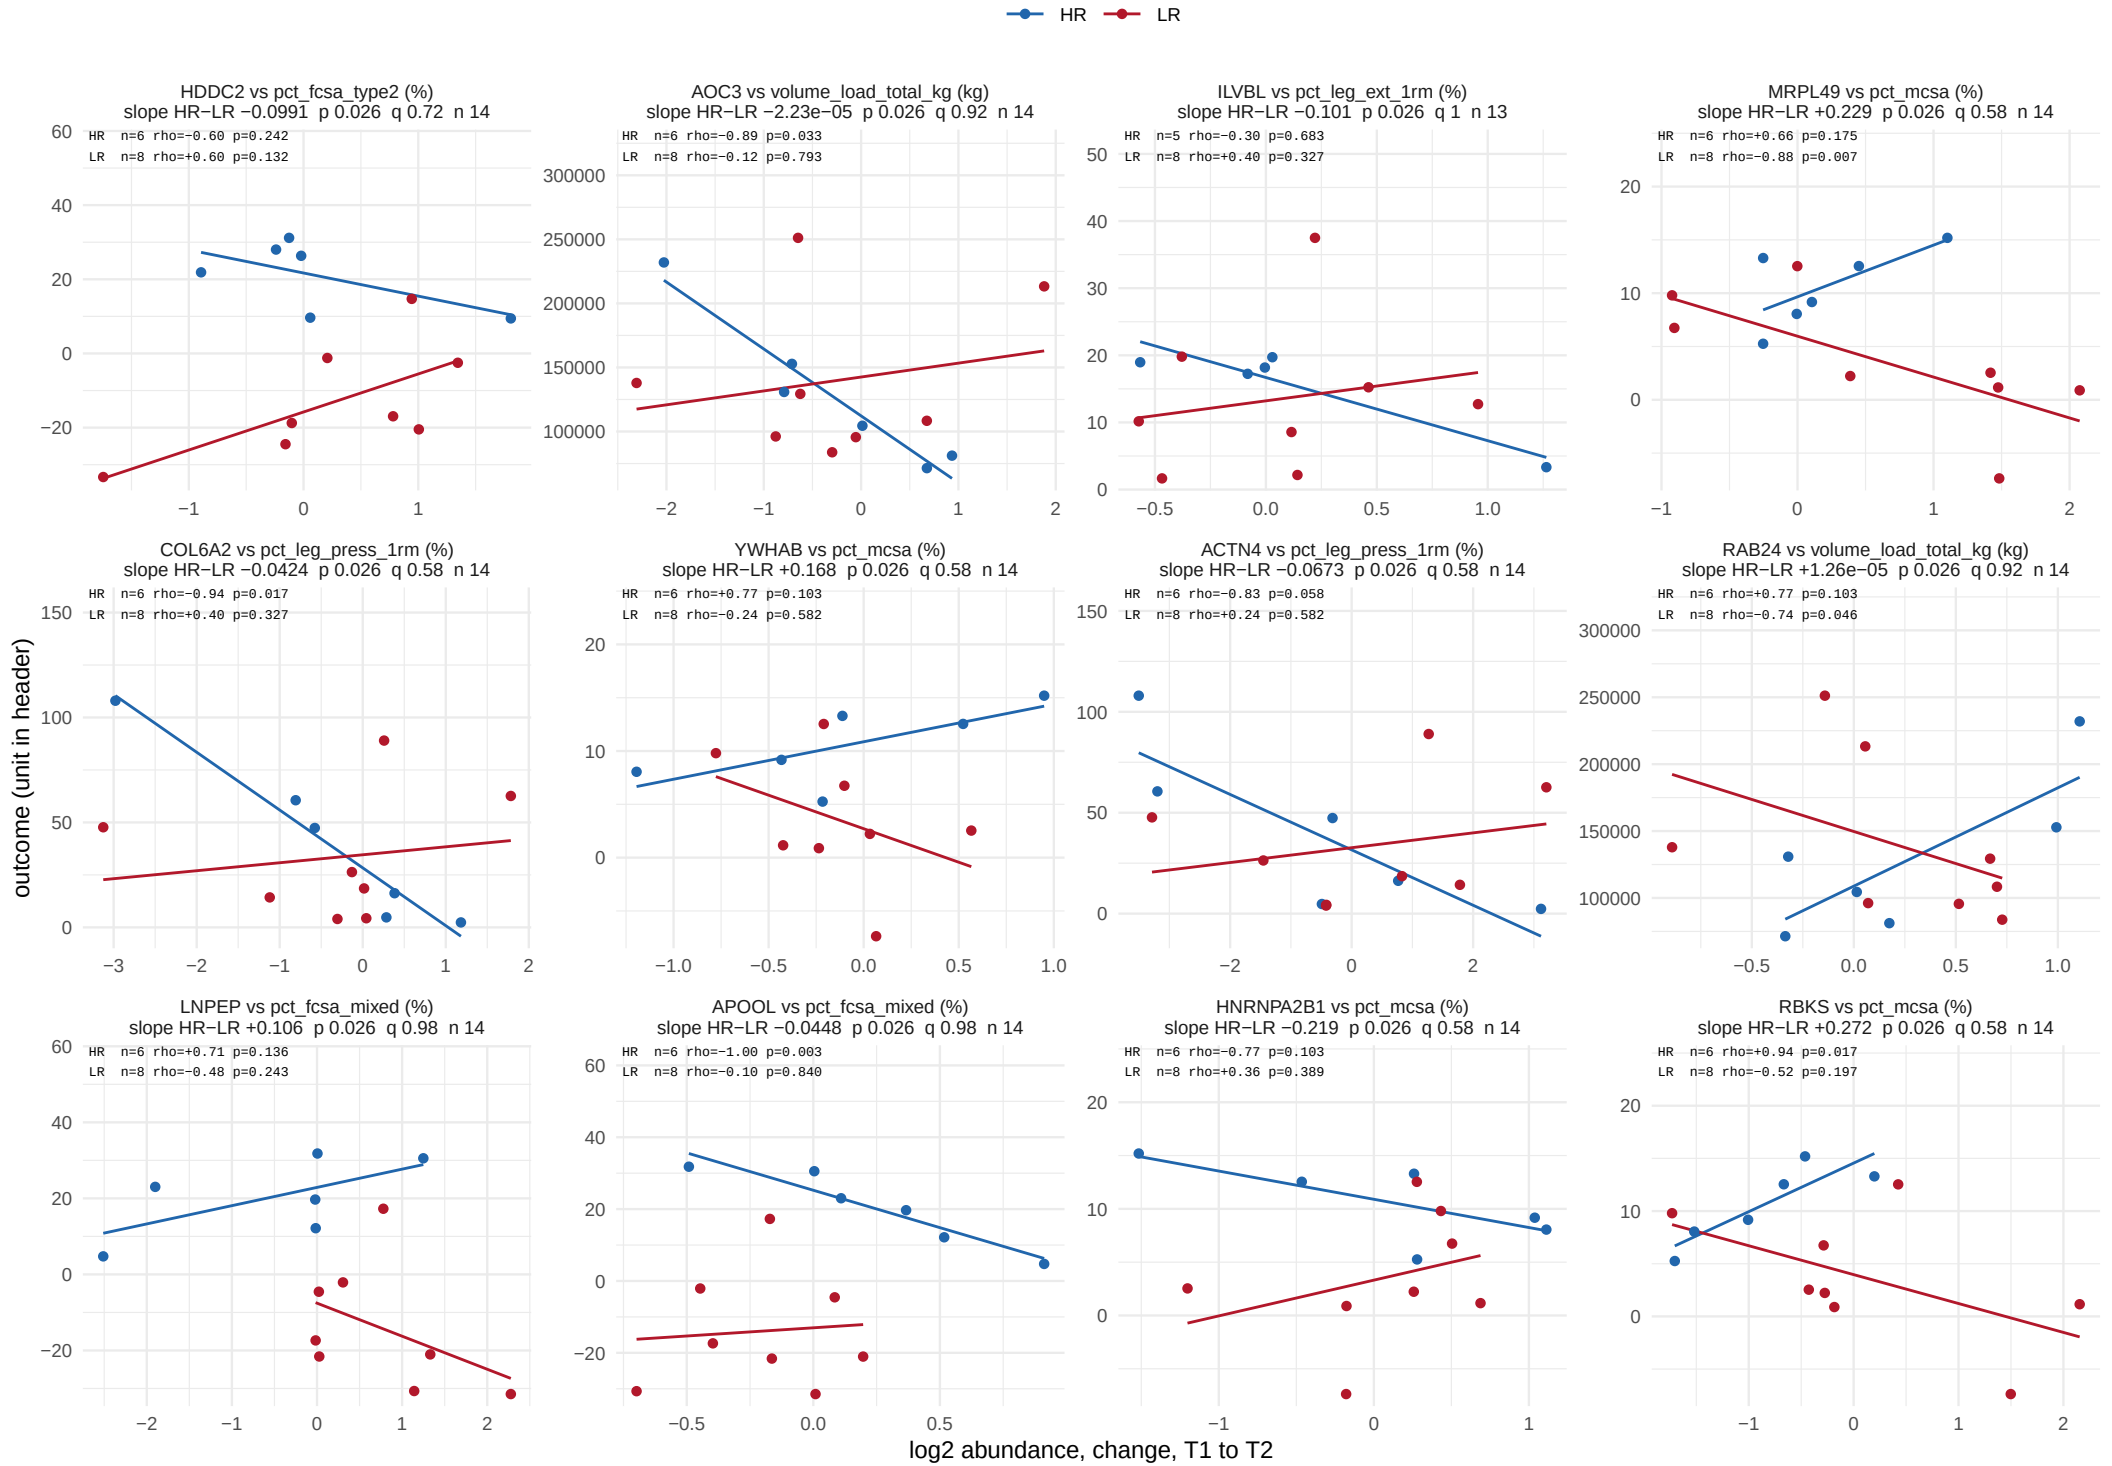

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


665 of 13300 feature−outcome pairs at p < 0.05, 11 at BH < 0.05. Page 33 of 56.

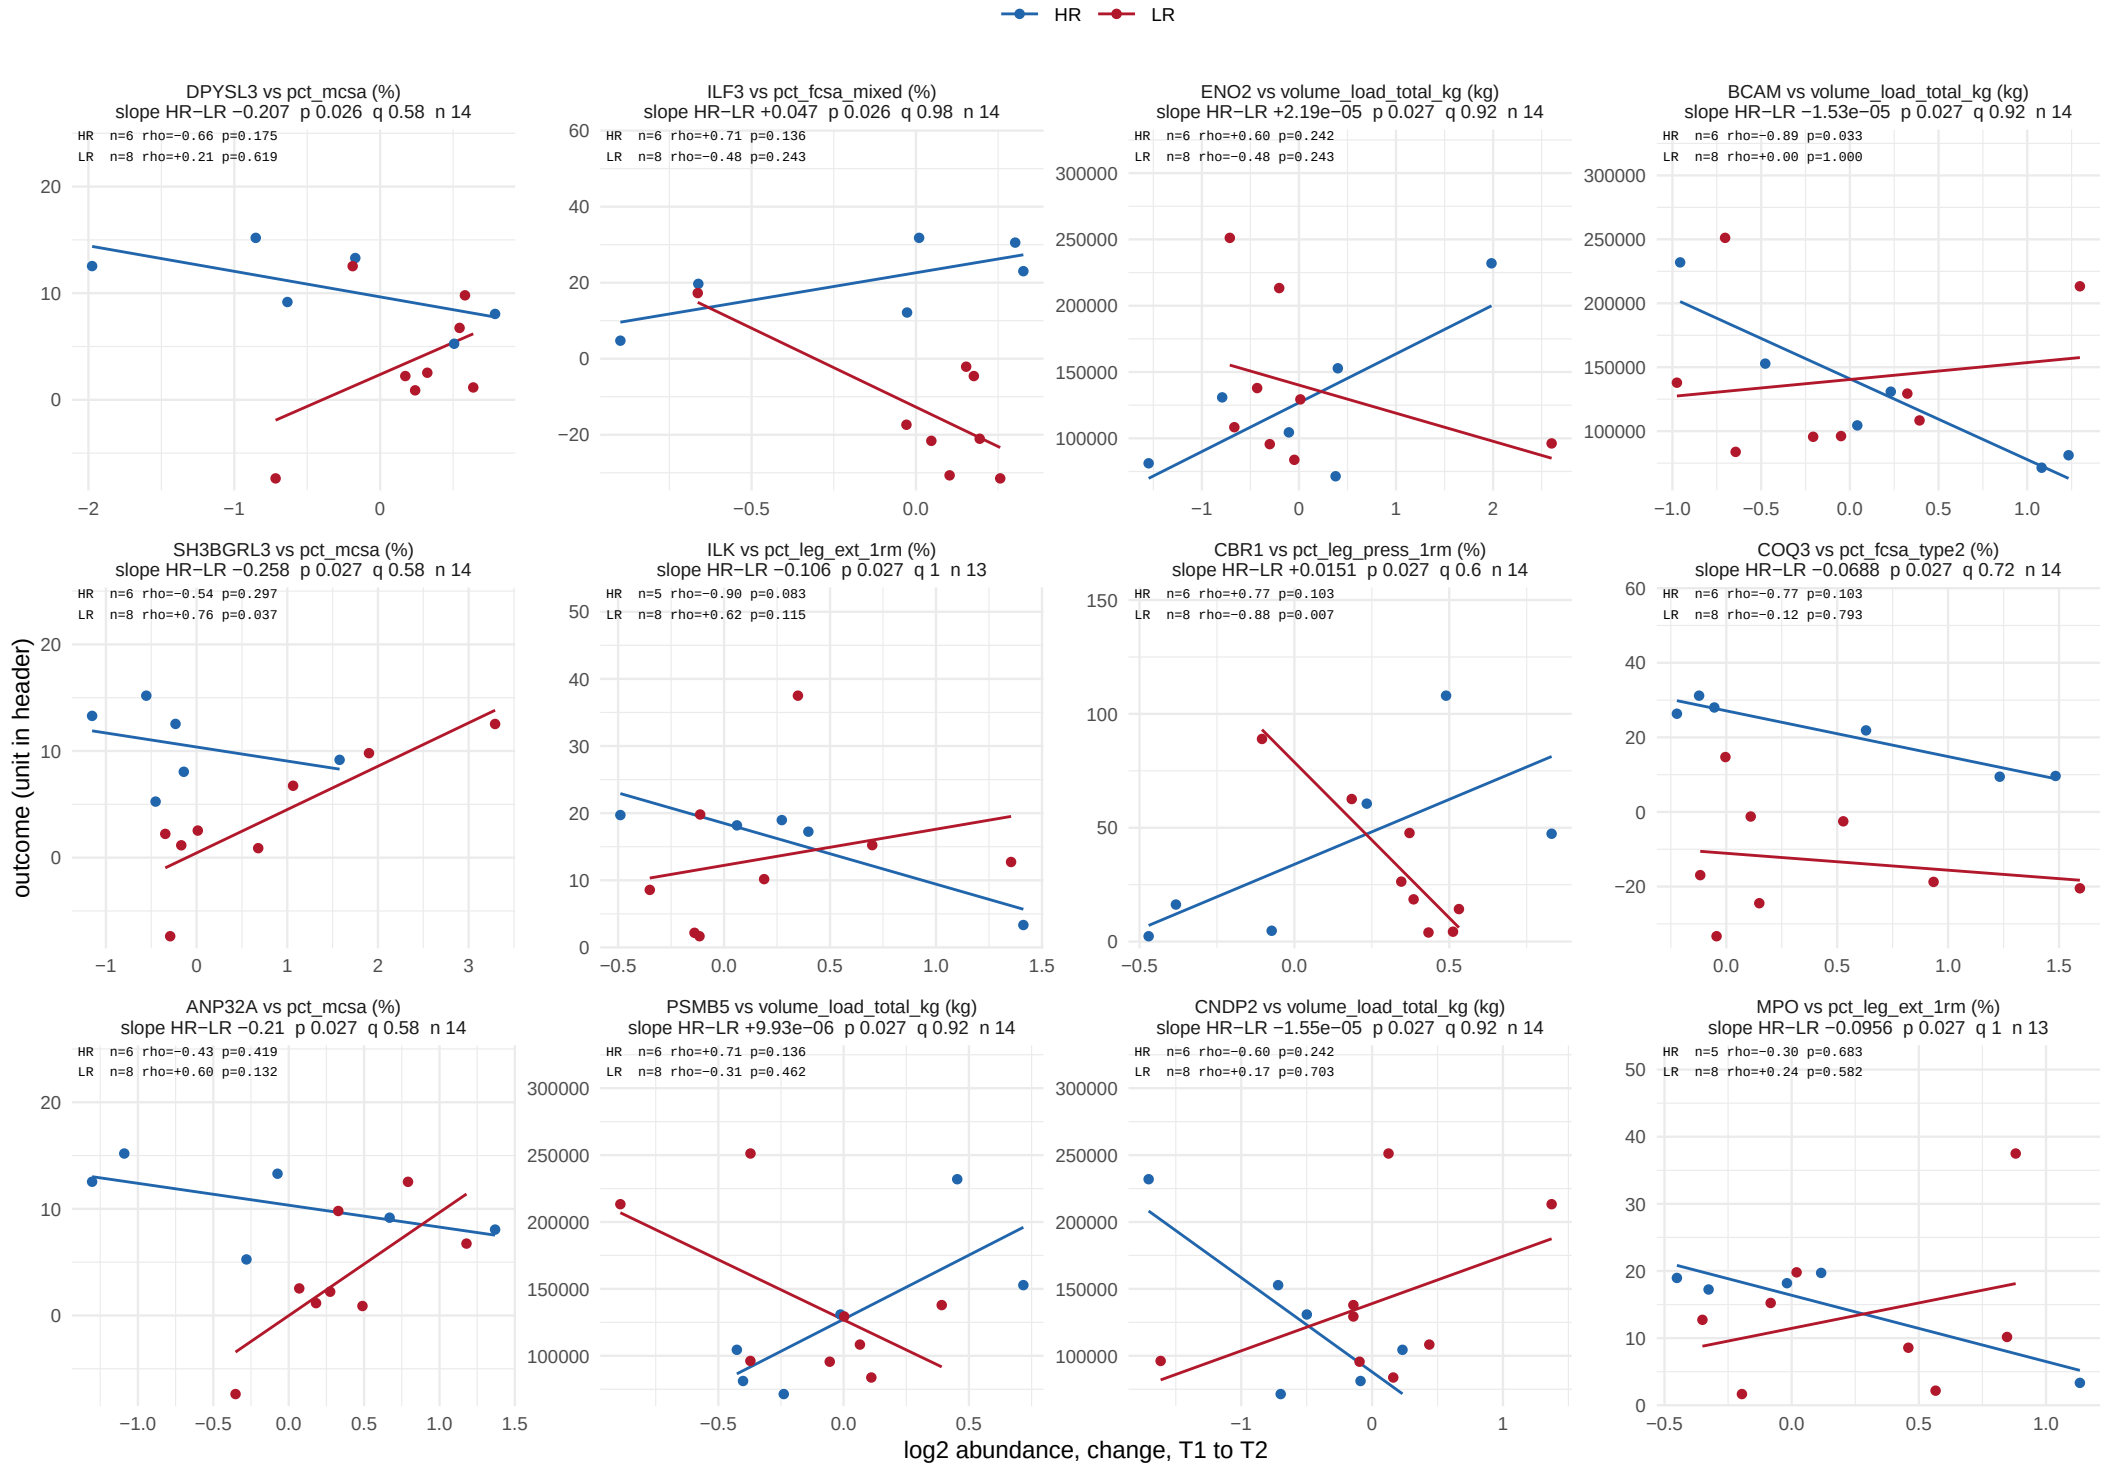

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


665 of 13300 feature−outcome pairs at p < 0.05, 11 at BH < 0.05. Page 34 of 56.

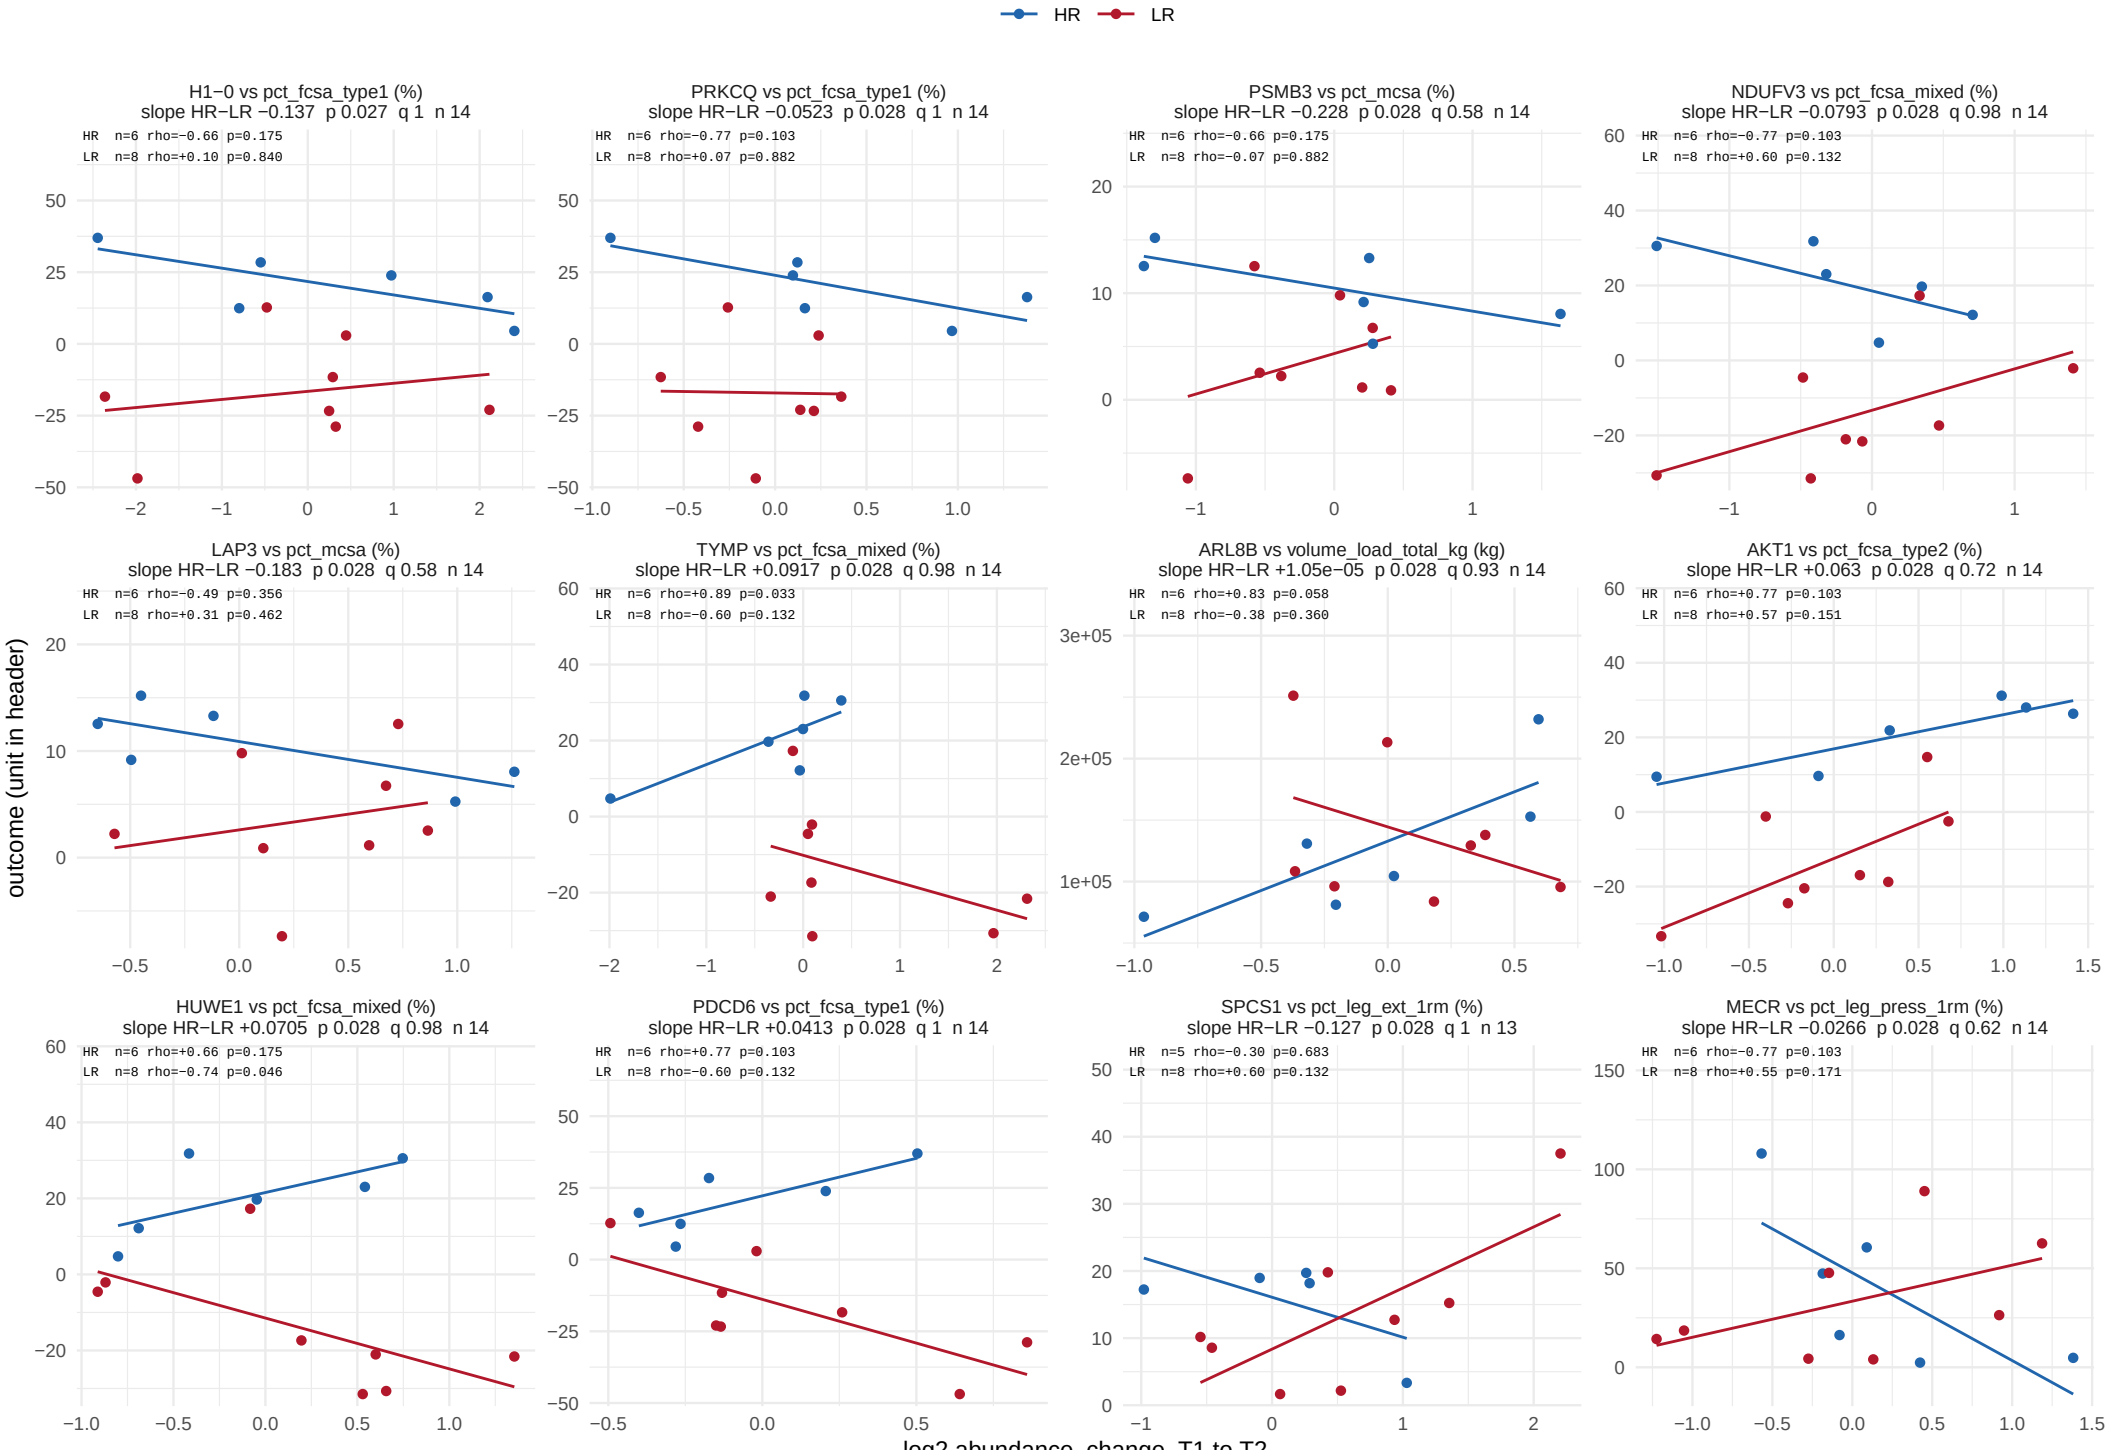

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


665 of 13300 feature−outcome pairs at p < 0.05, 11 at BH < 0.05. Page 35 of 56.

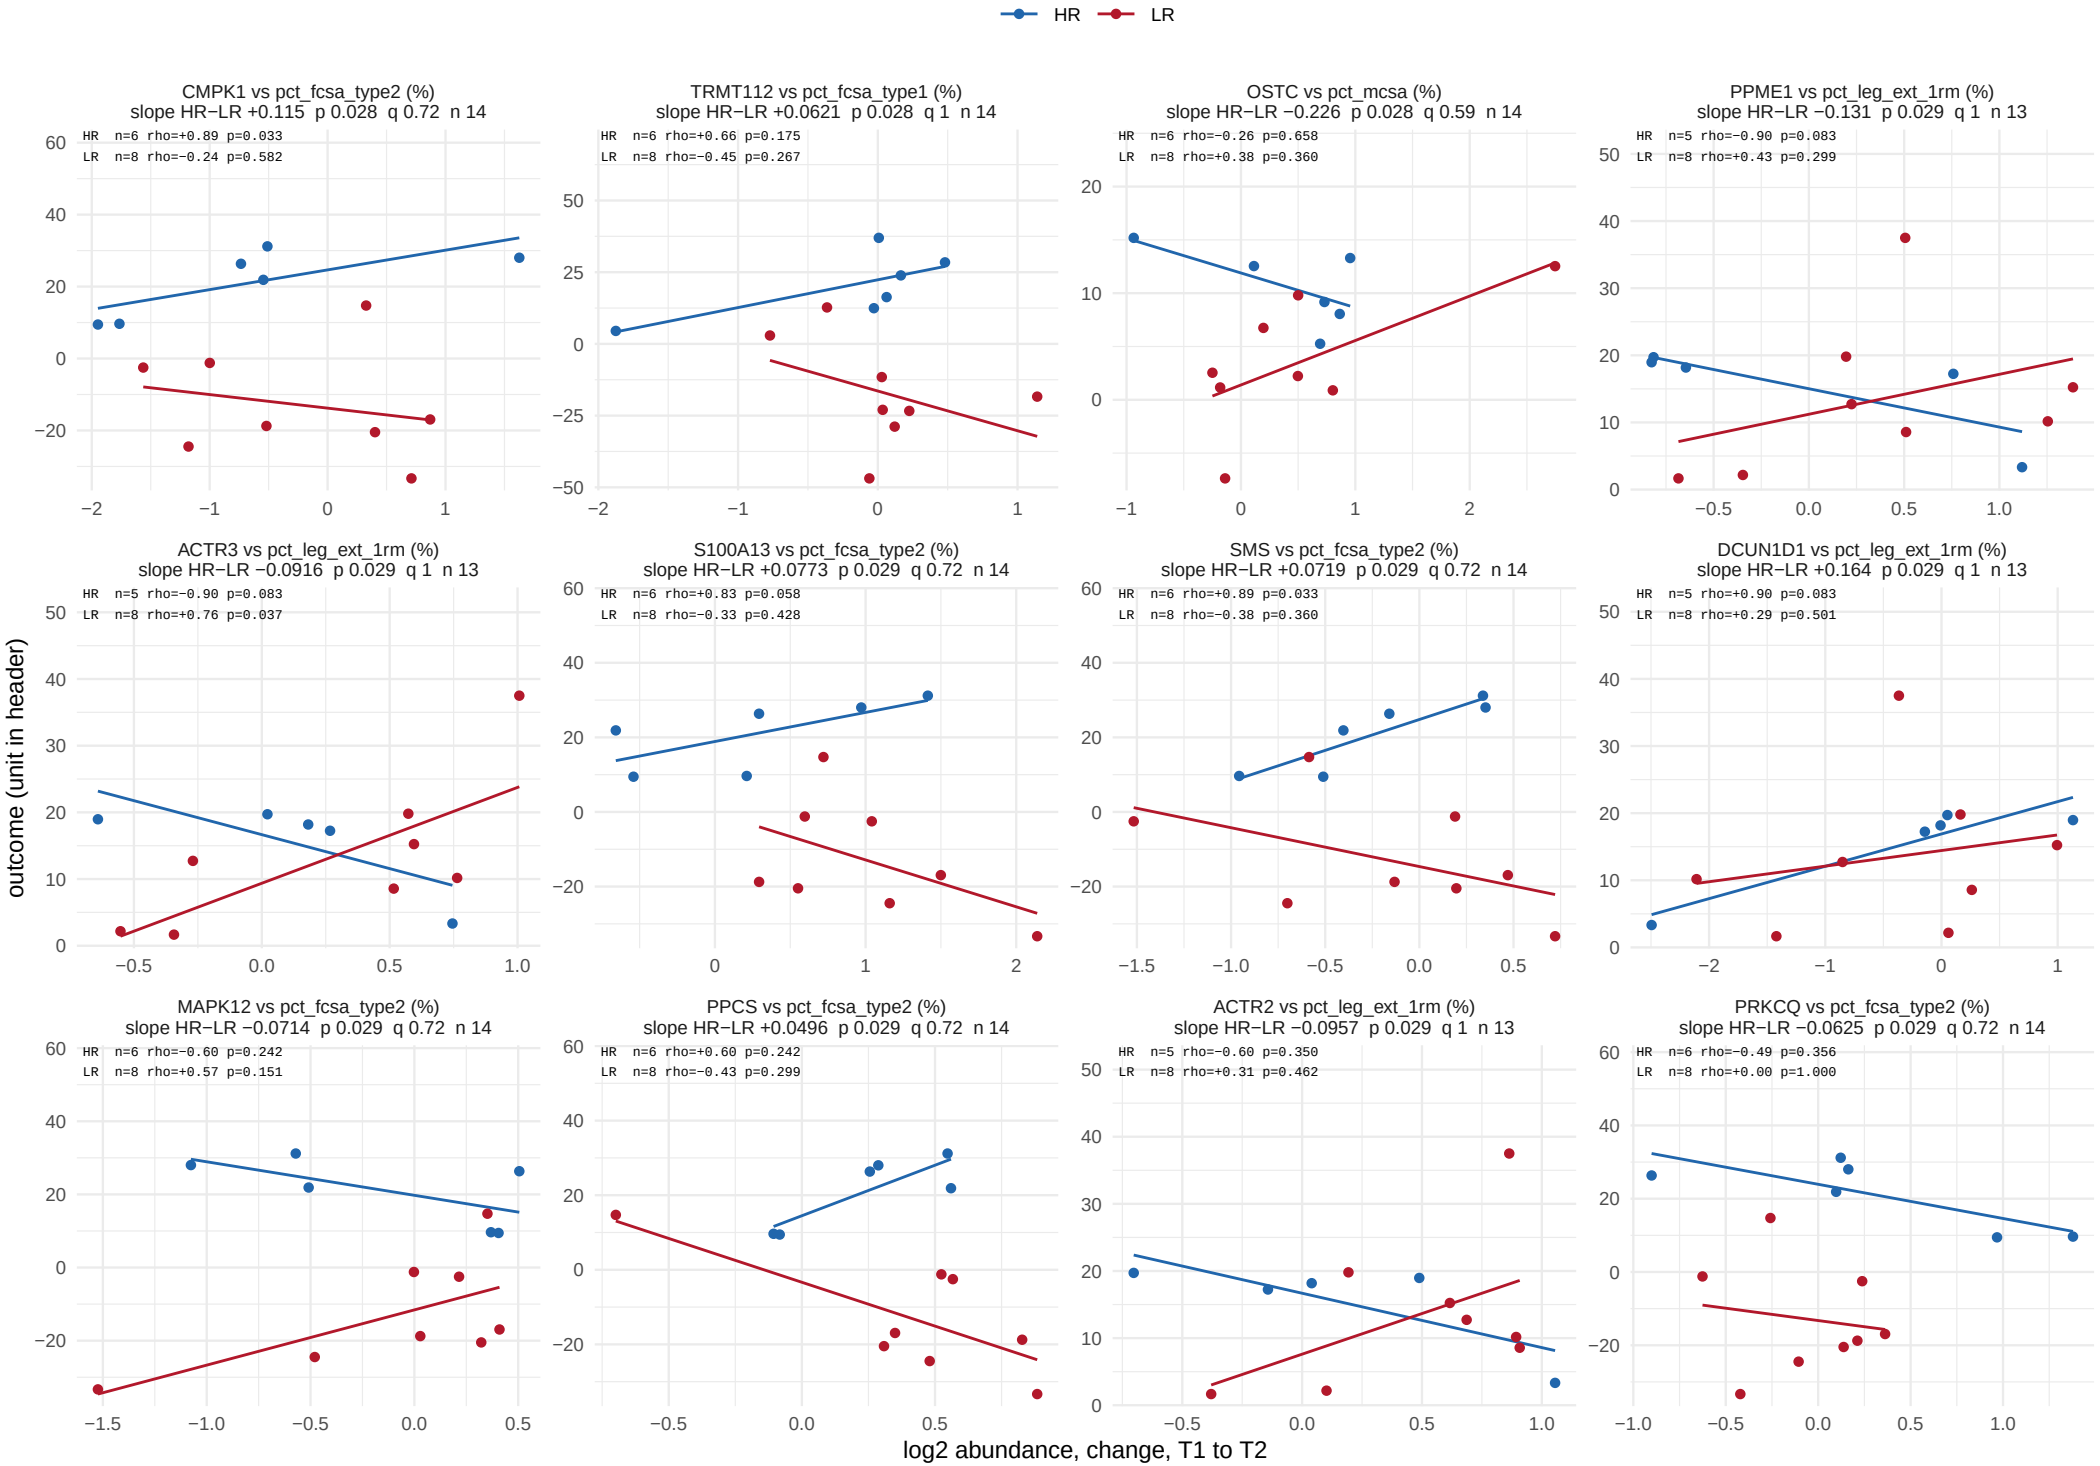

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


665 of 13300 feature−outcome pairs at p < 0.05, 11 at BH < 0.05. Page 36 of 56.

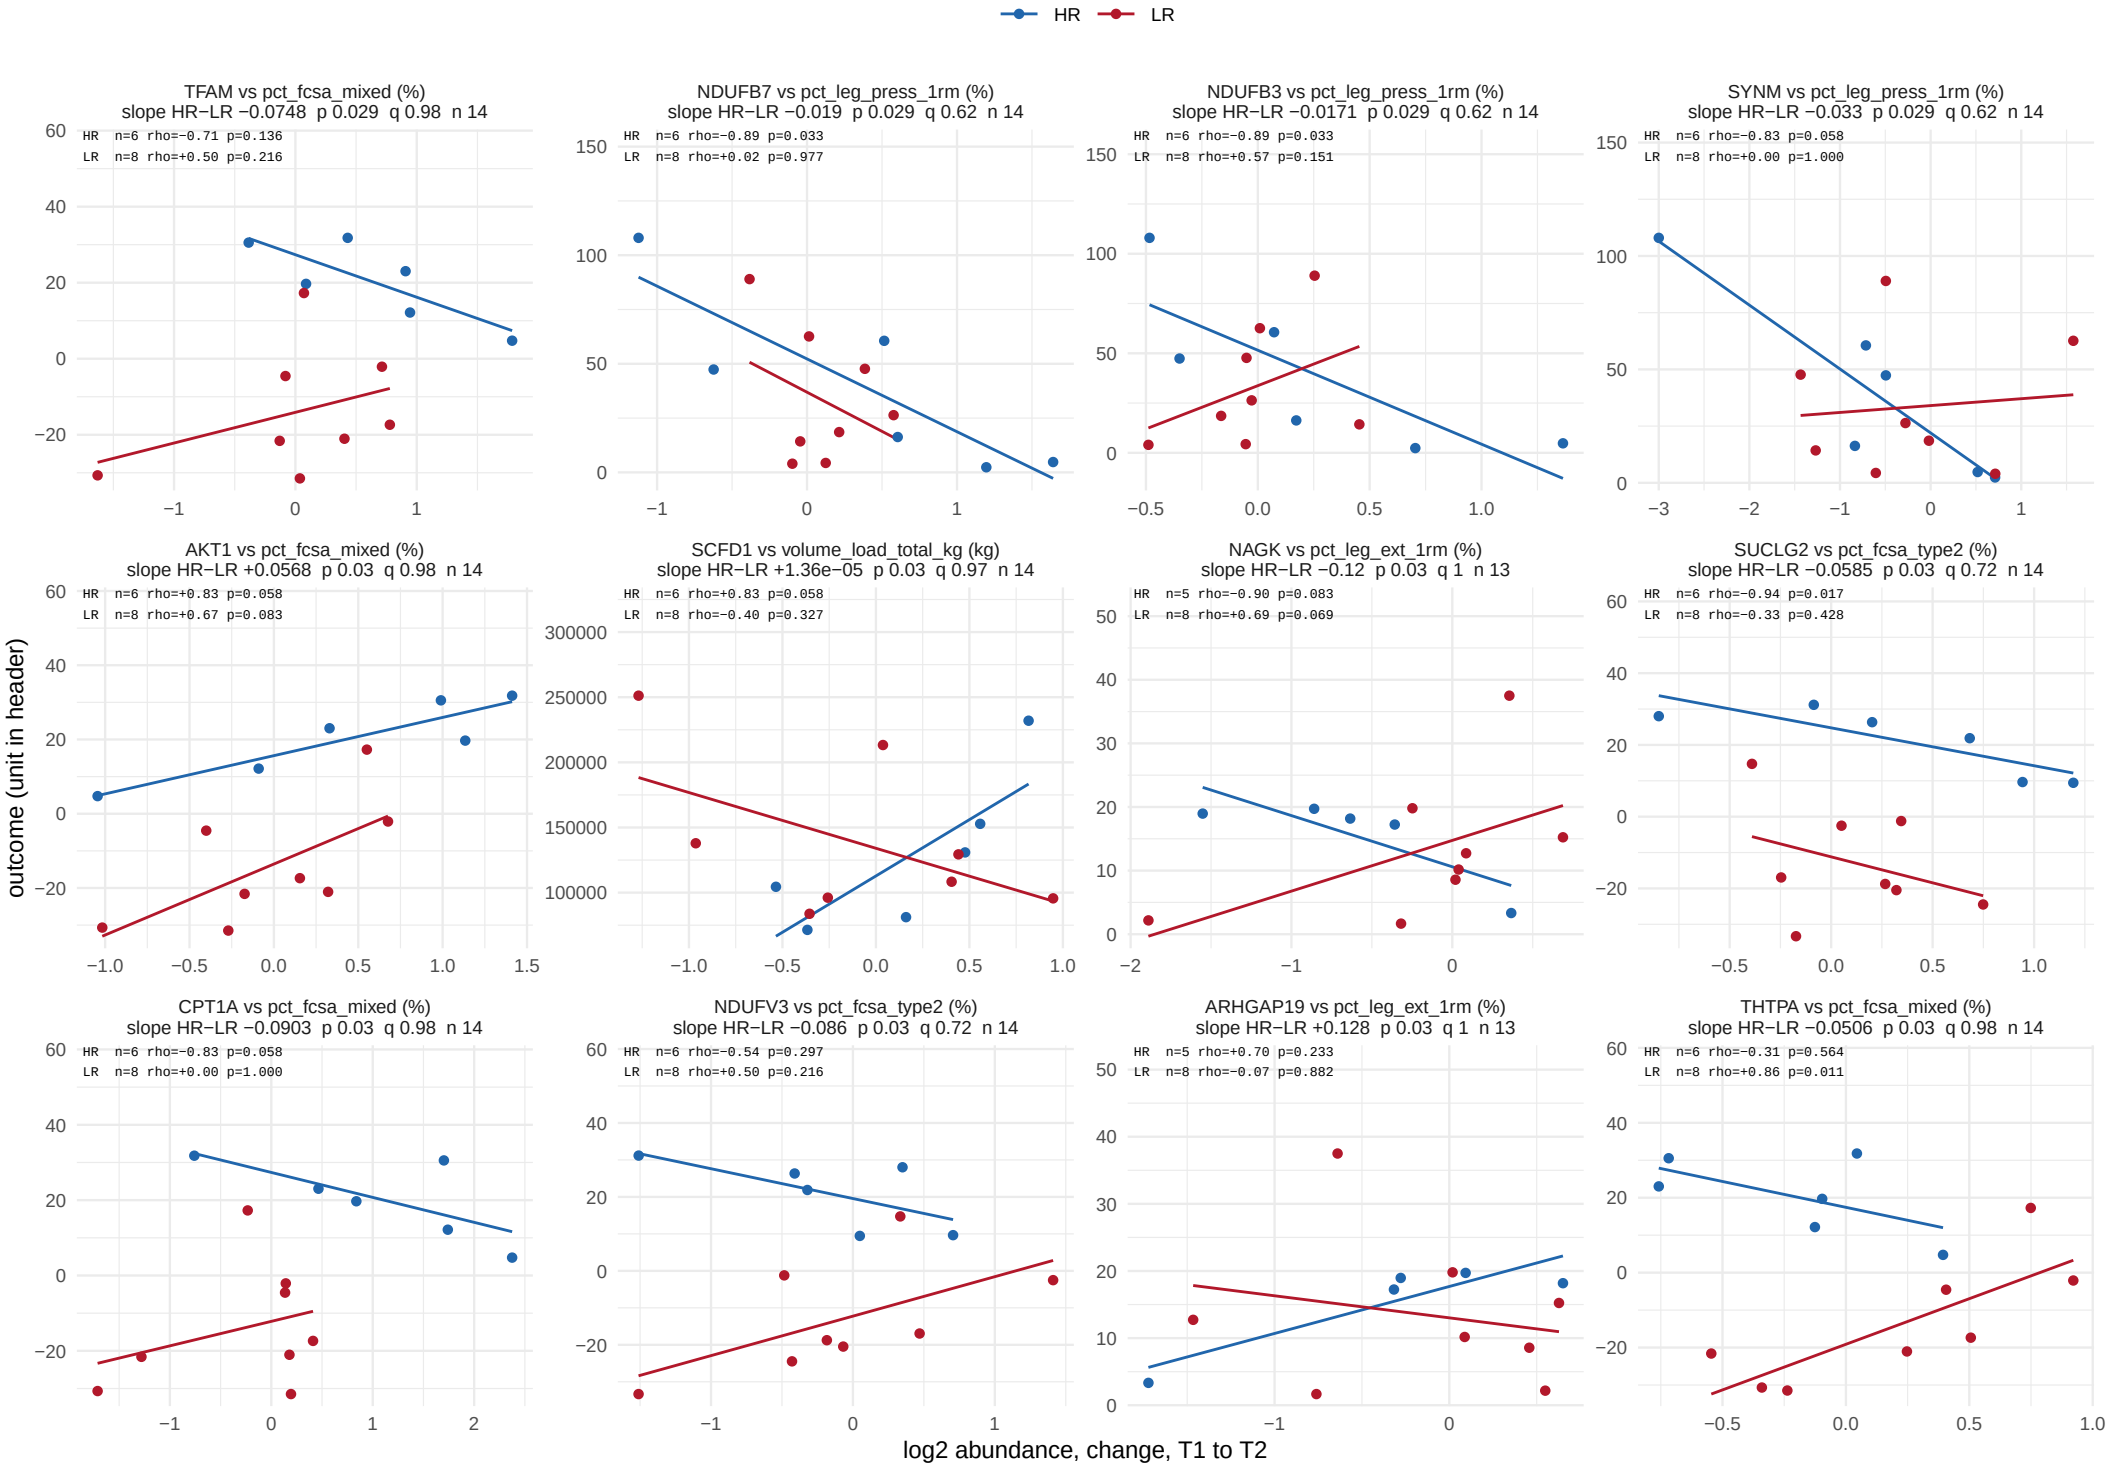

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


665 of 13300 feature−outcome pairs at p < 0.05, 11 at BH < 0.05. Page 37 of 56.

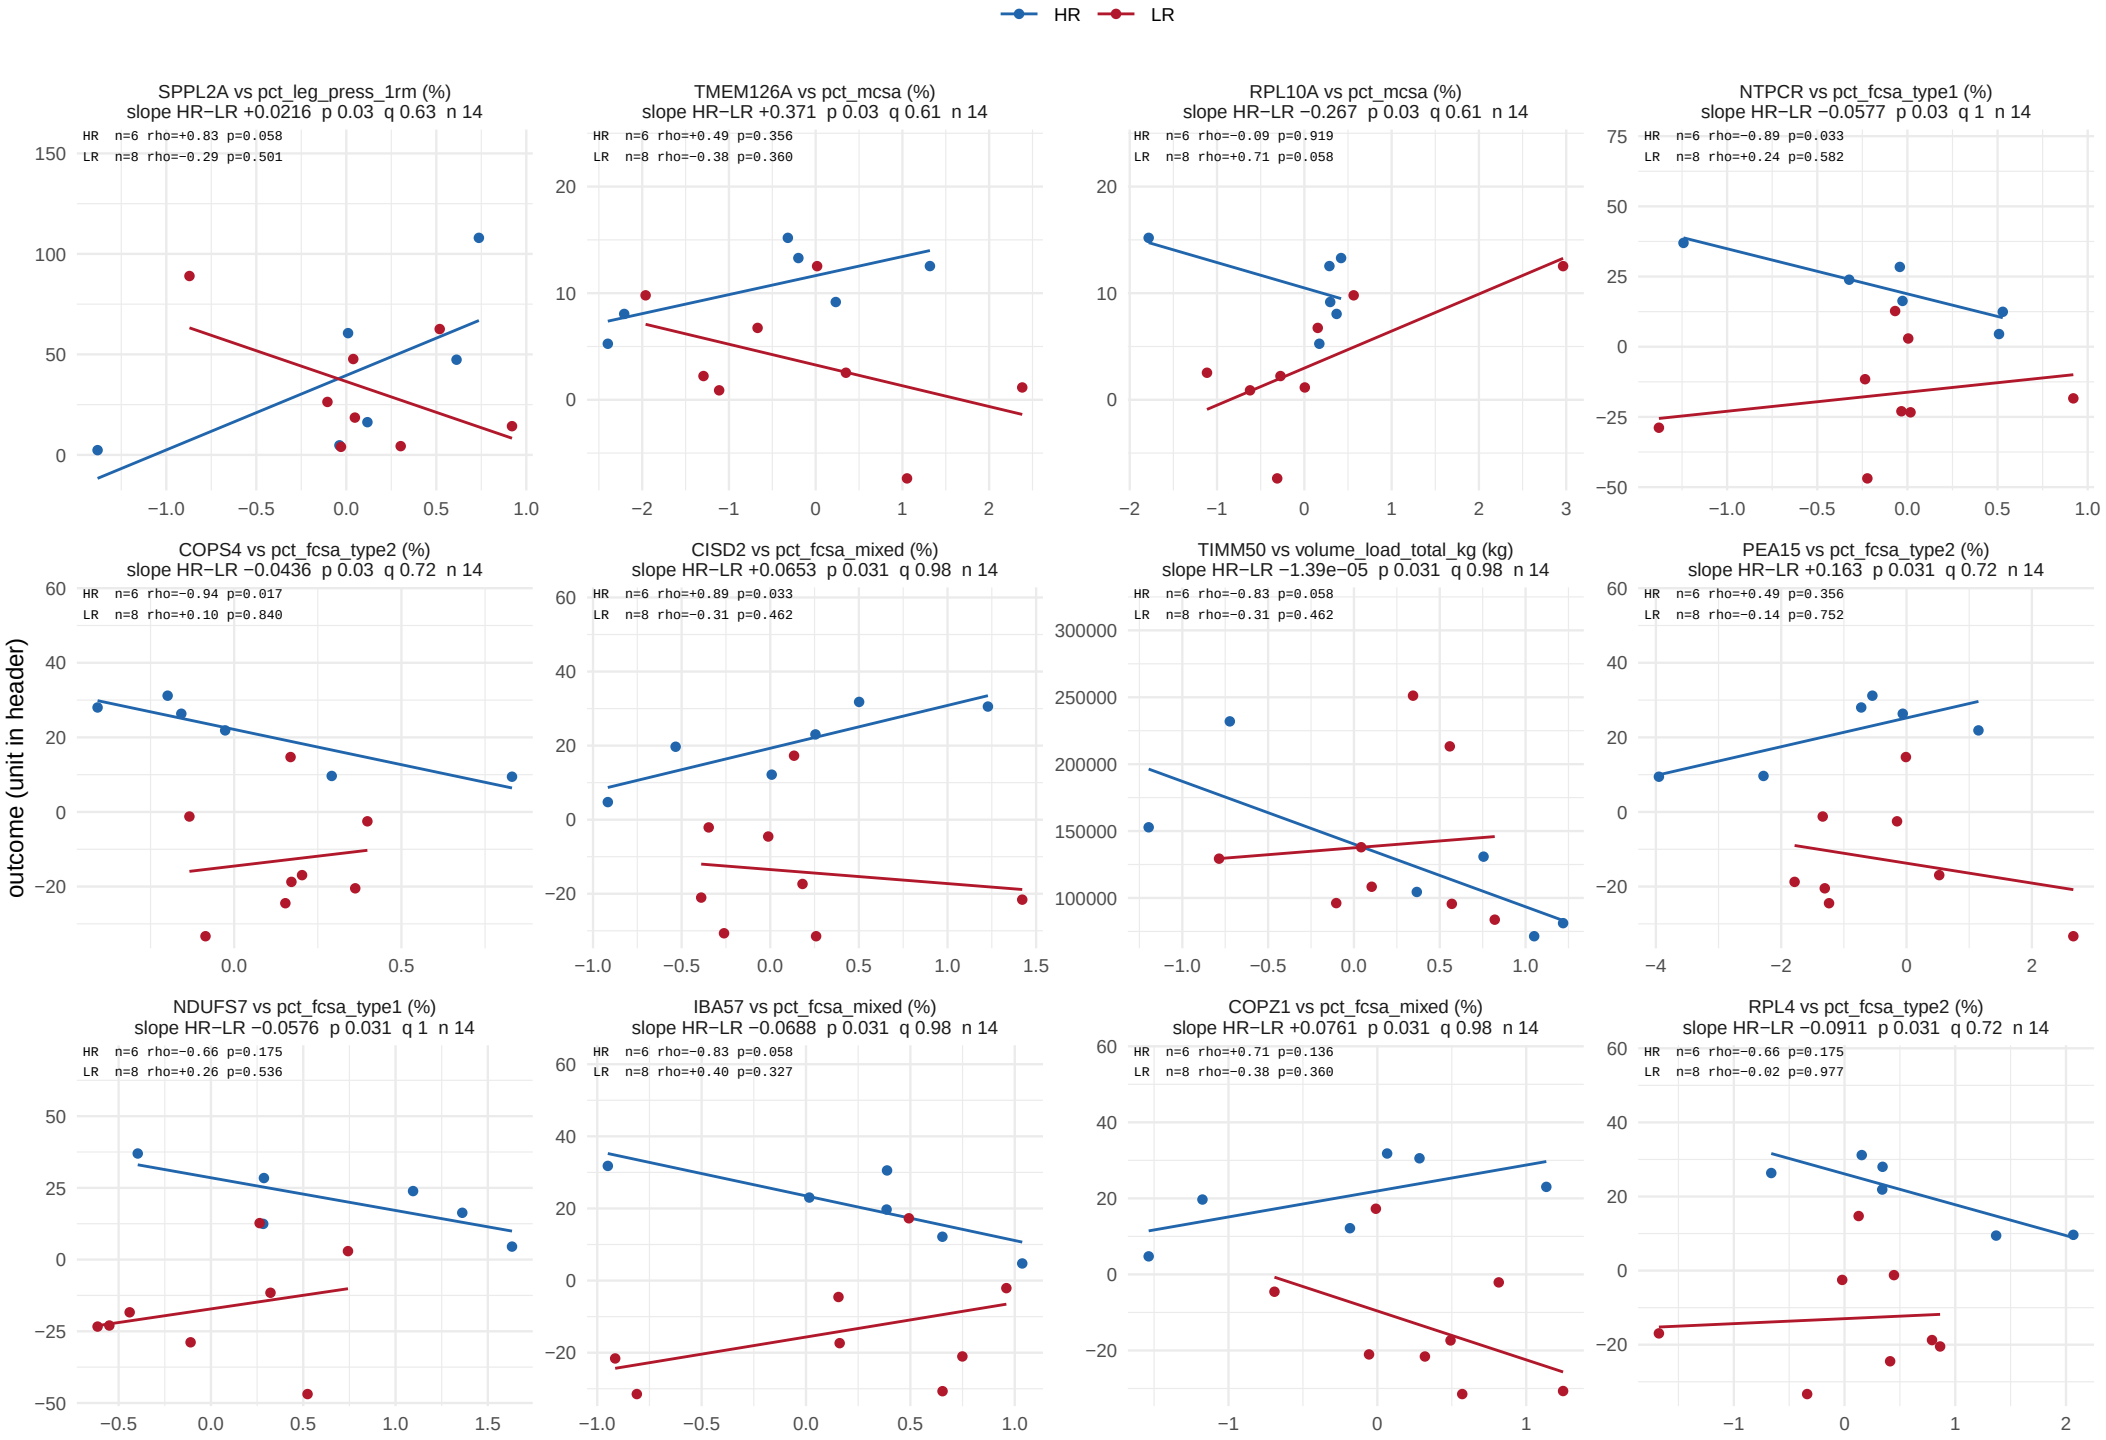

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


665 of 13300 feature−outcome pairs at p < 0.05, 11 at BH < 0.05. Page 38 of 56.

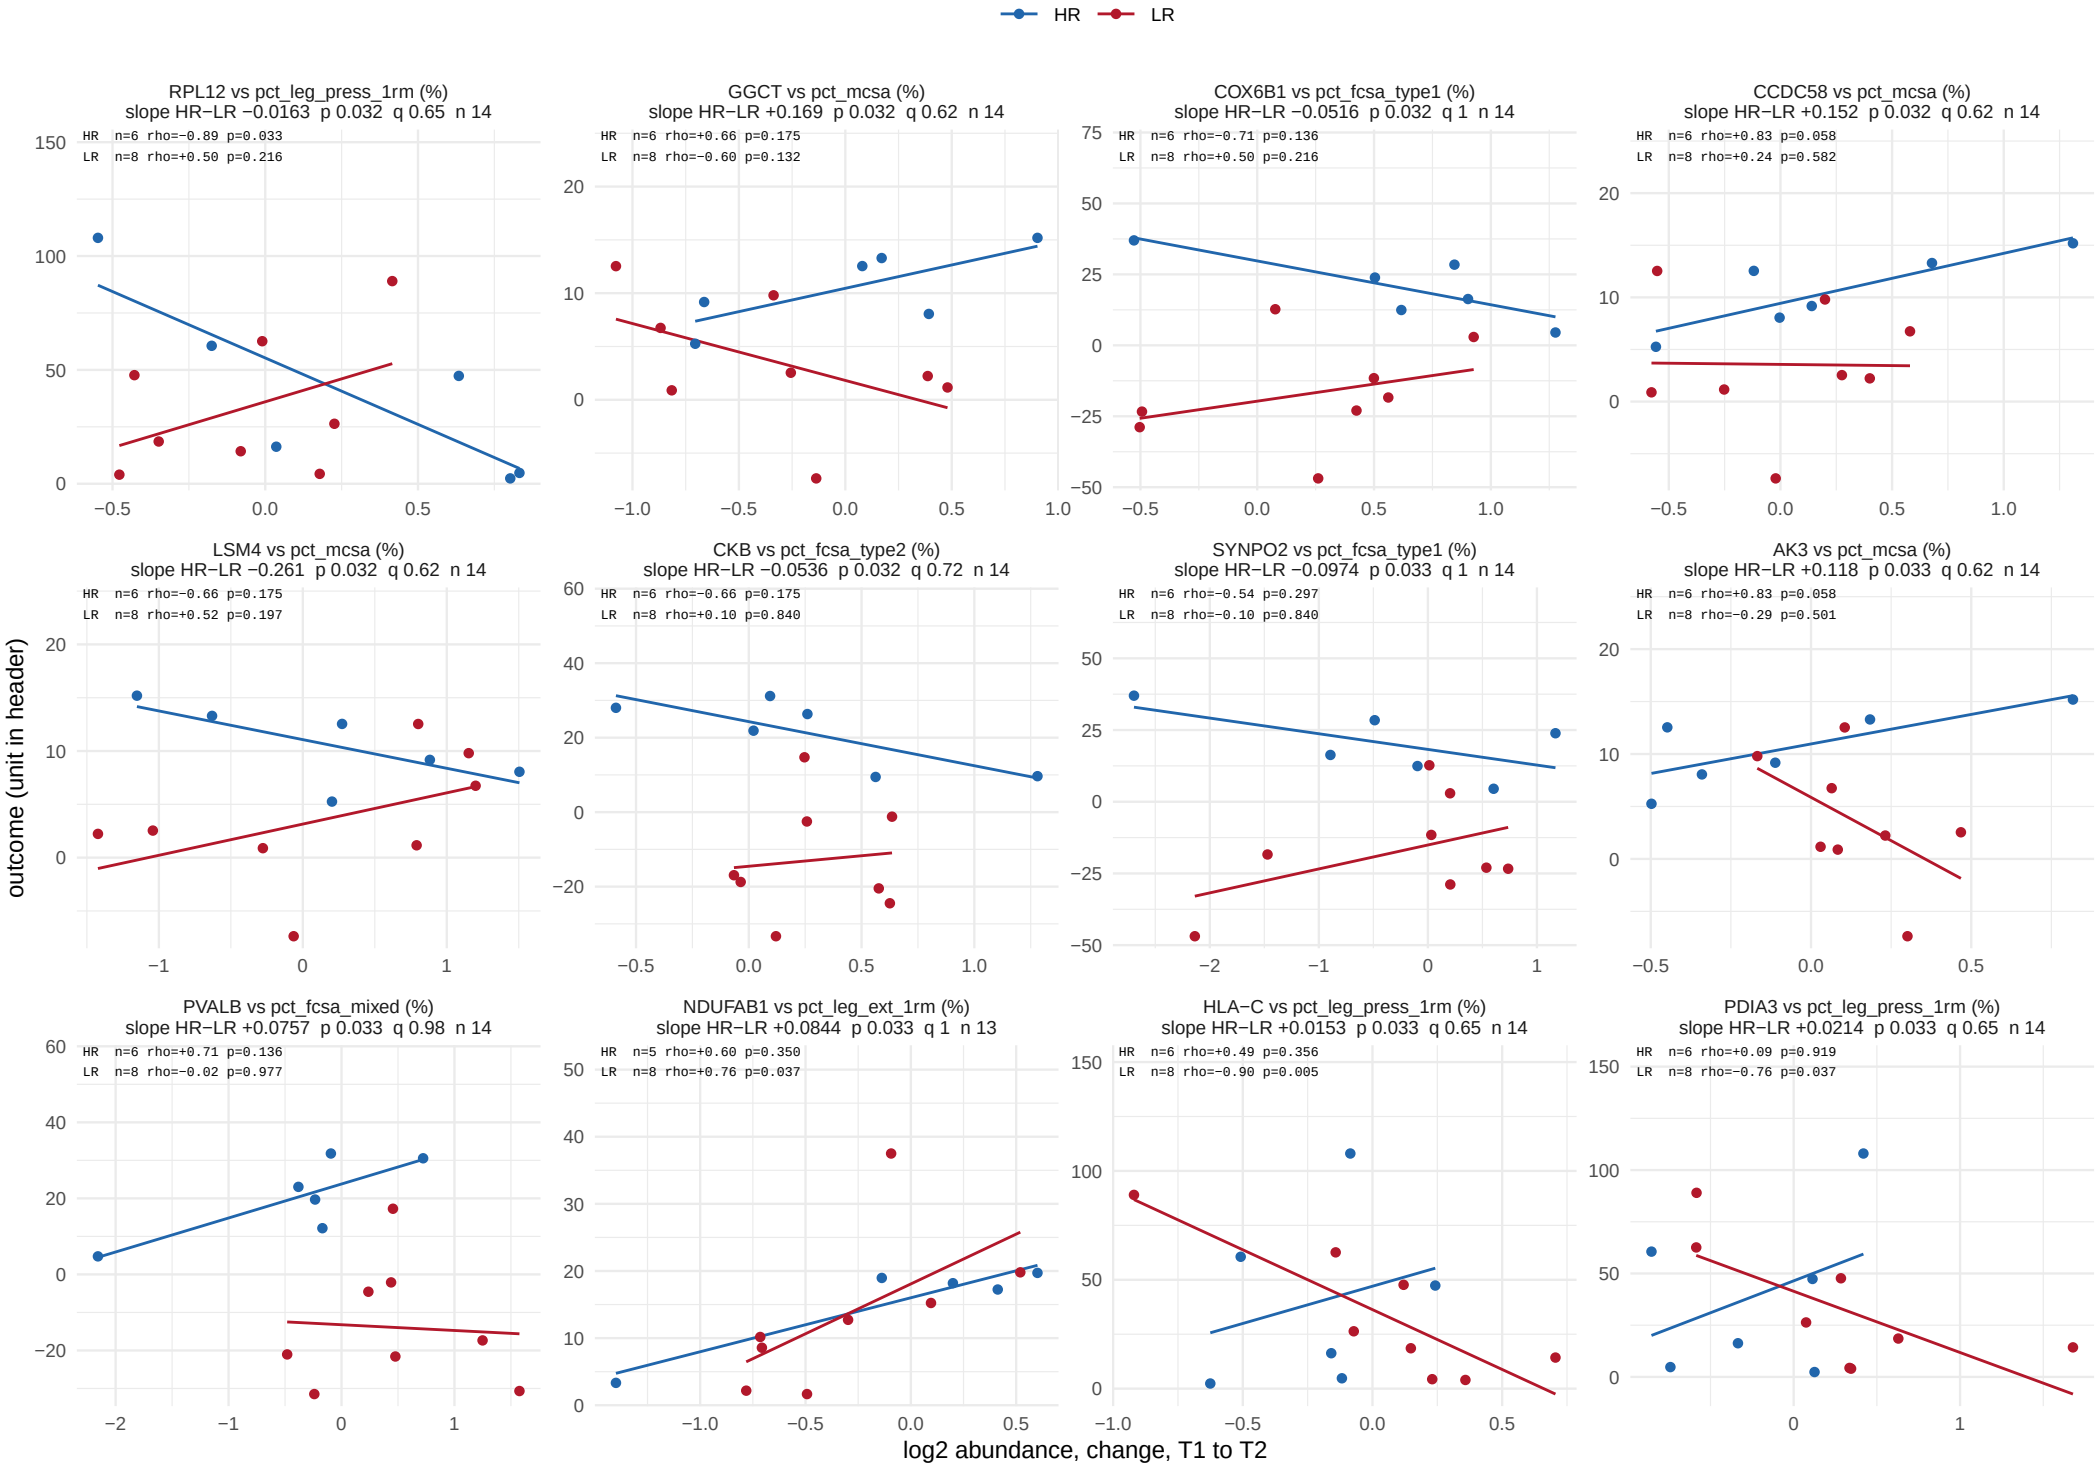

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


665 of 13300 feature−outcome pairs at p < 0.05, 11 at BH < 0.05. Page 39 of 56.

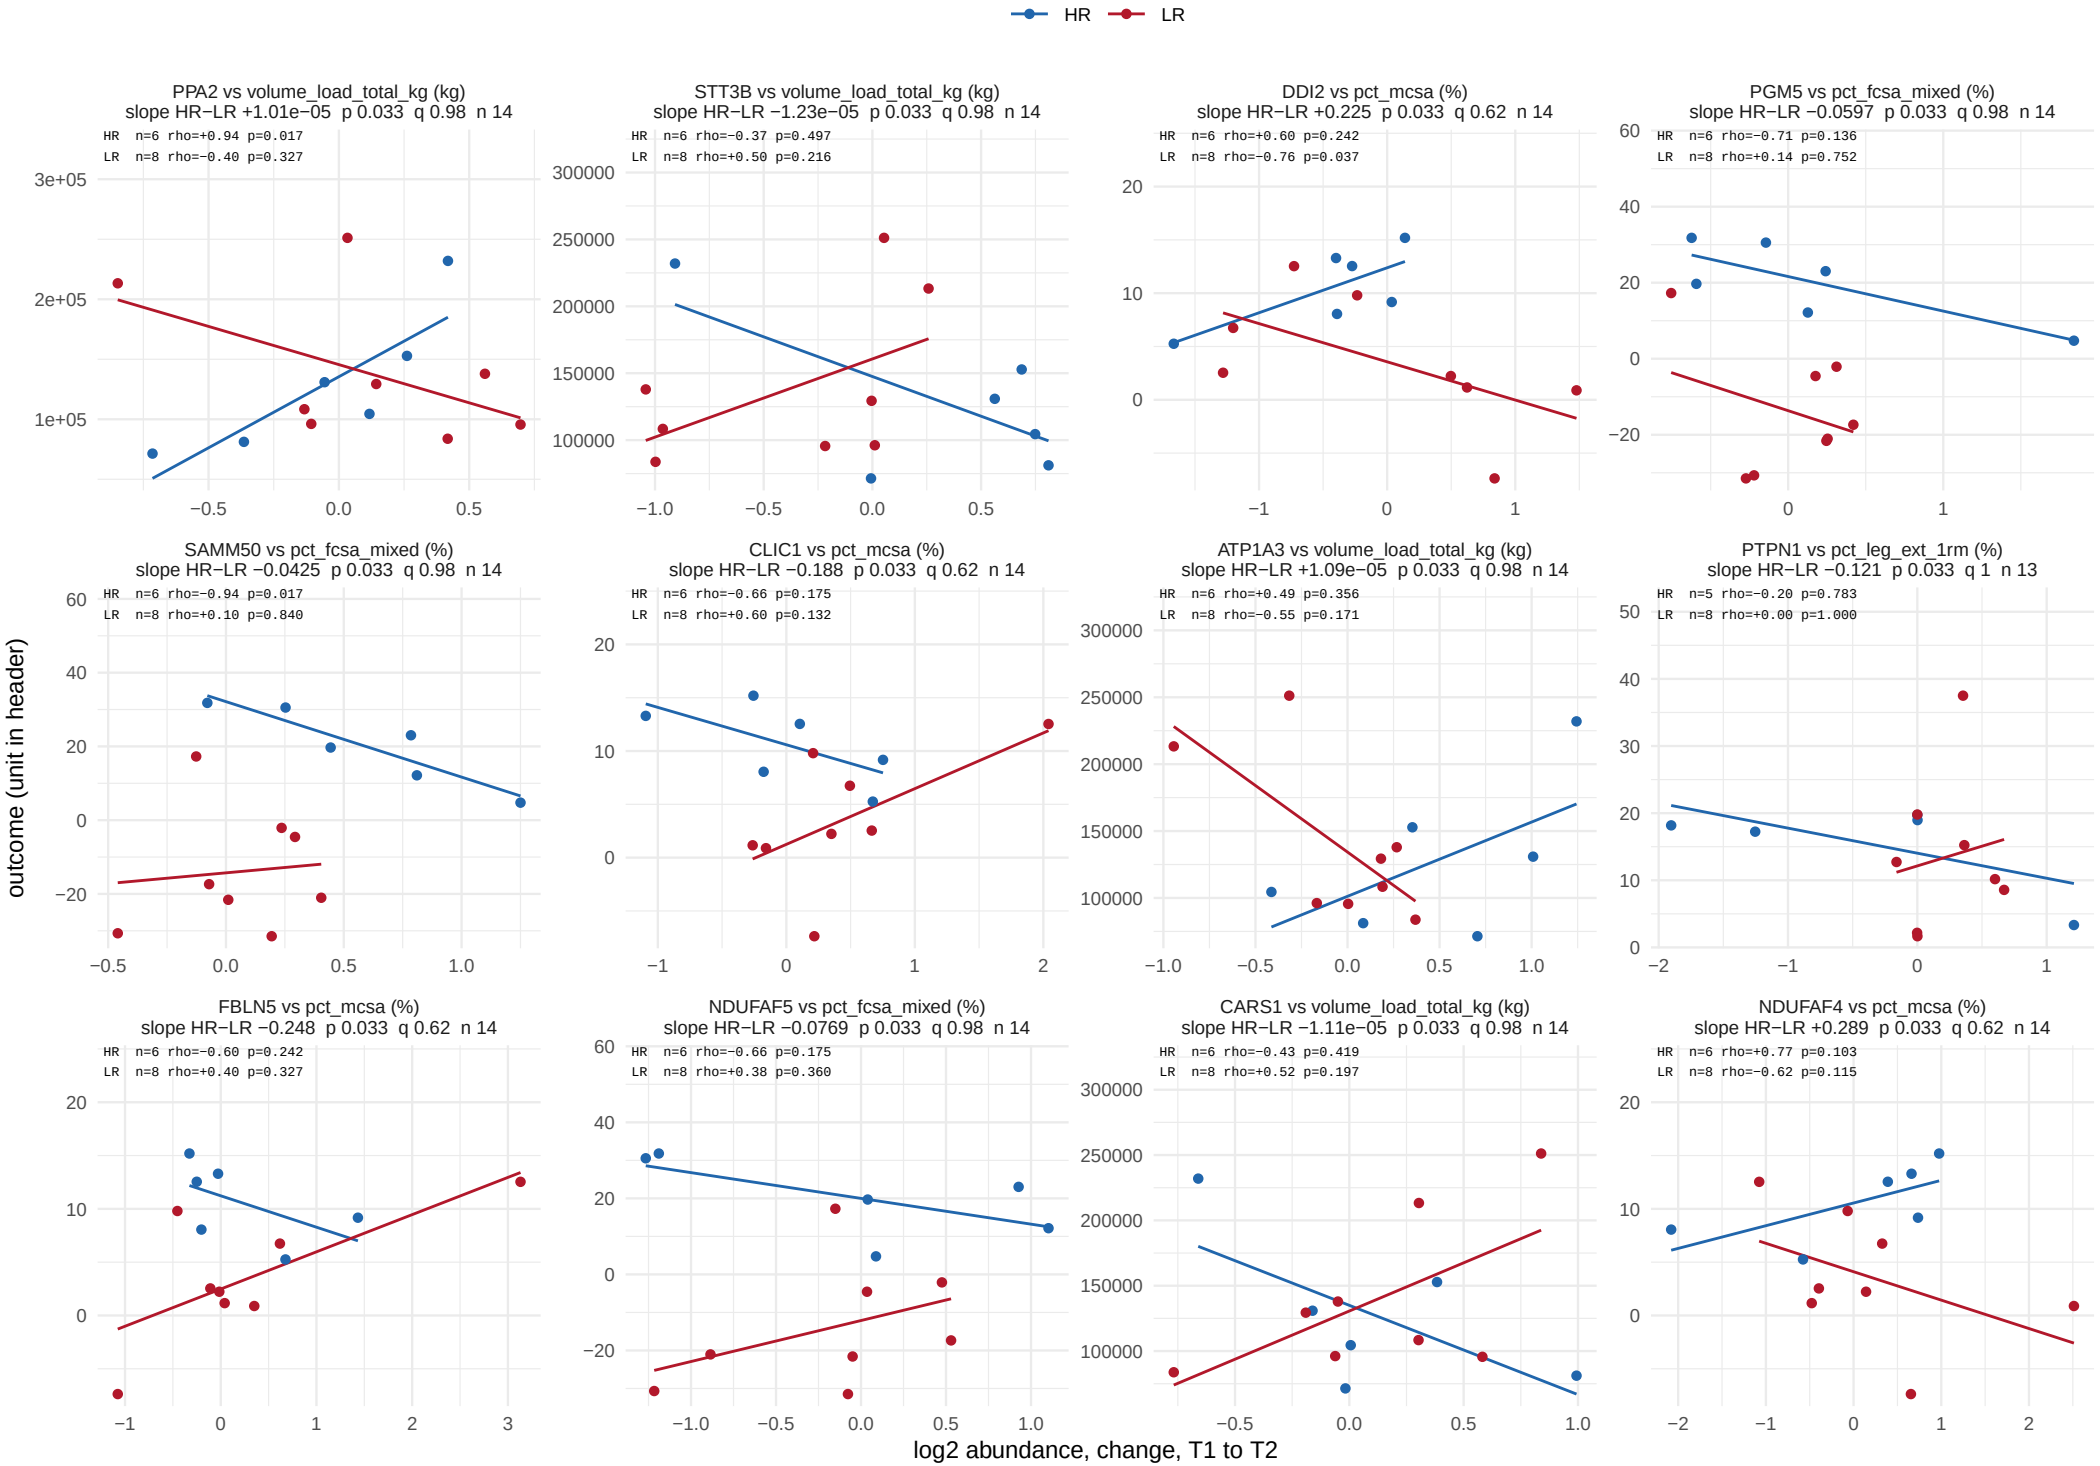

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


665 of 13300 feature−outcome pairs at p < 0.05, 11 at BH < 0.05. Page 40 of 56.

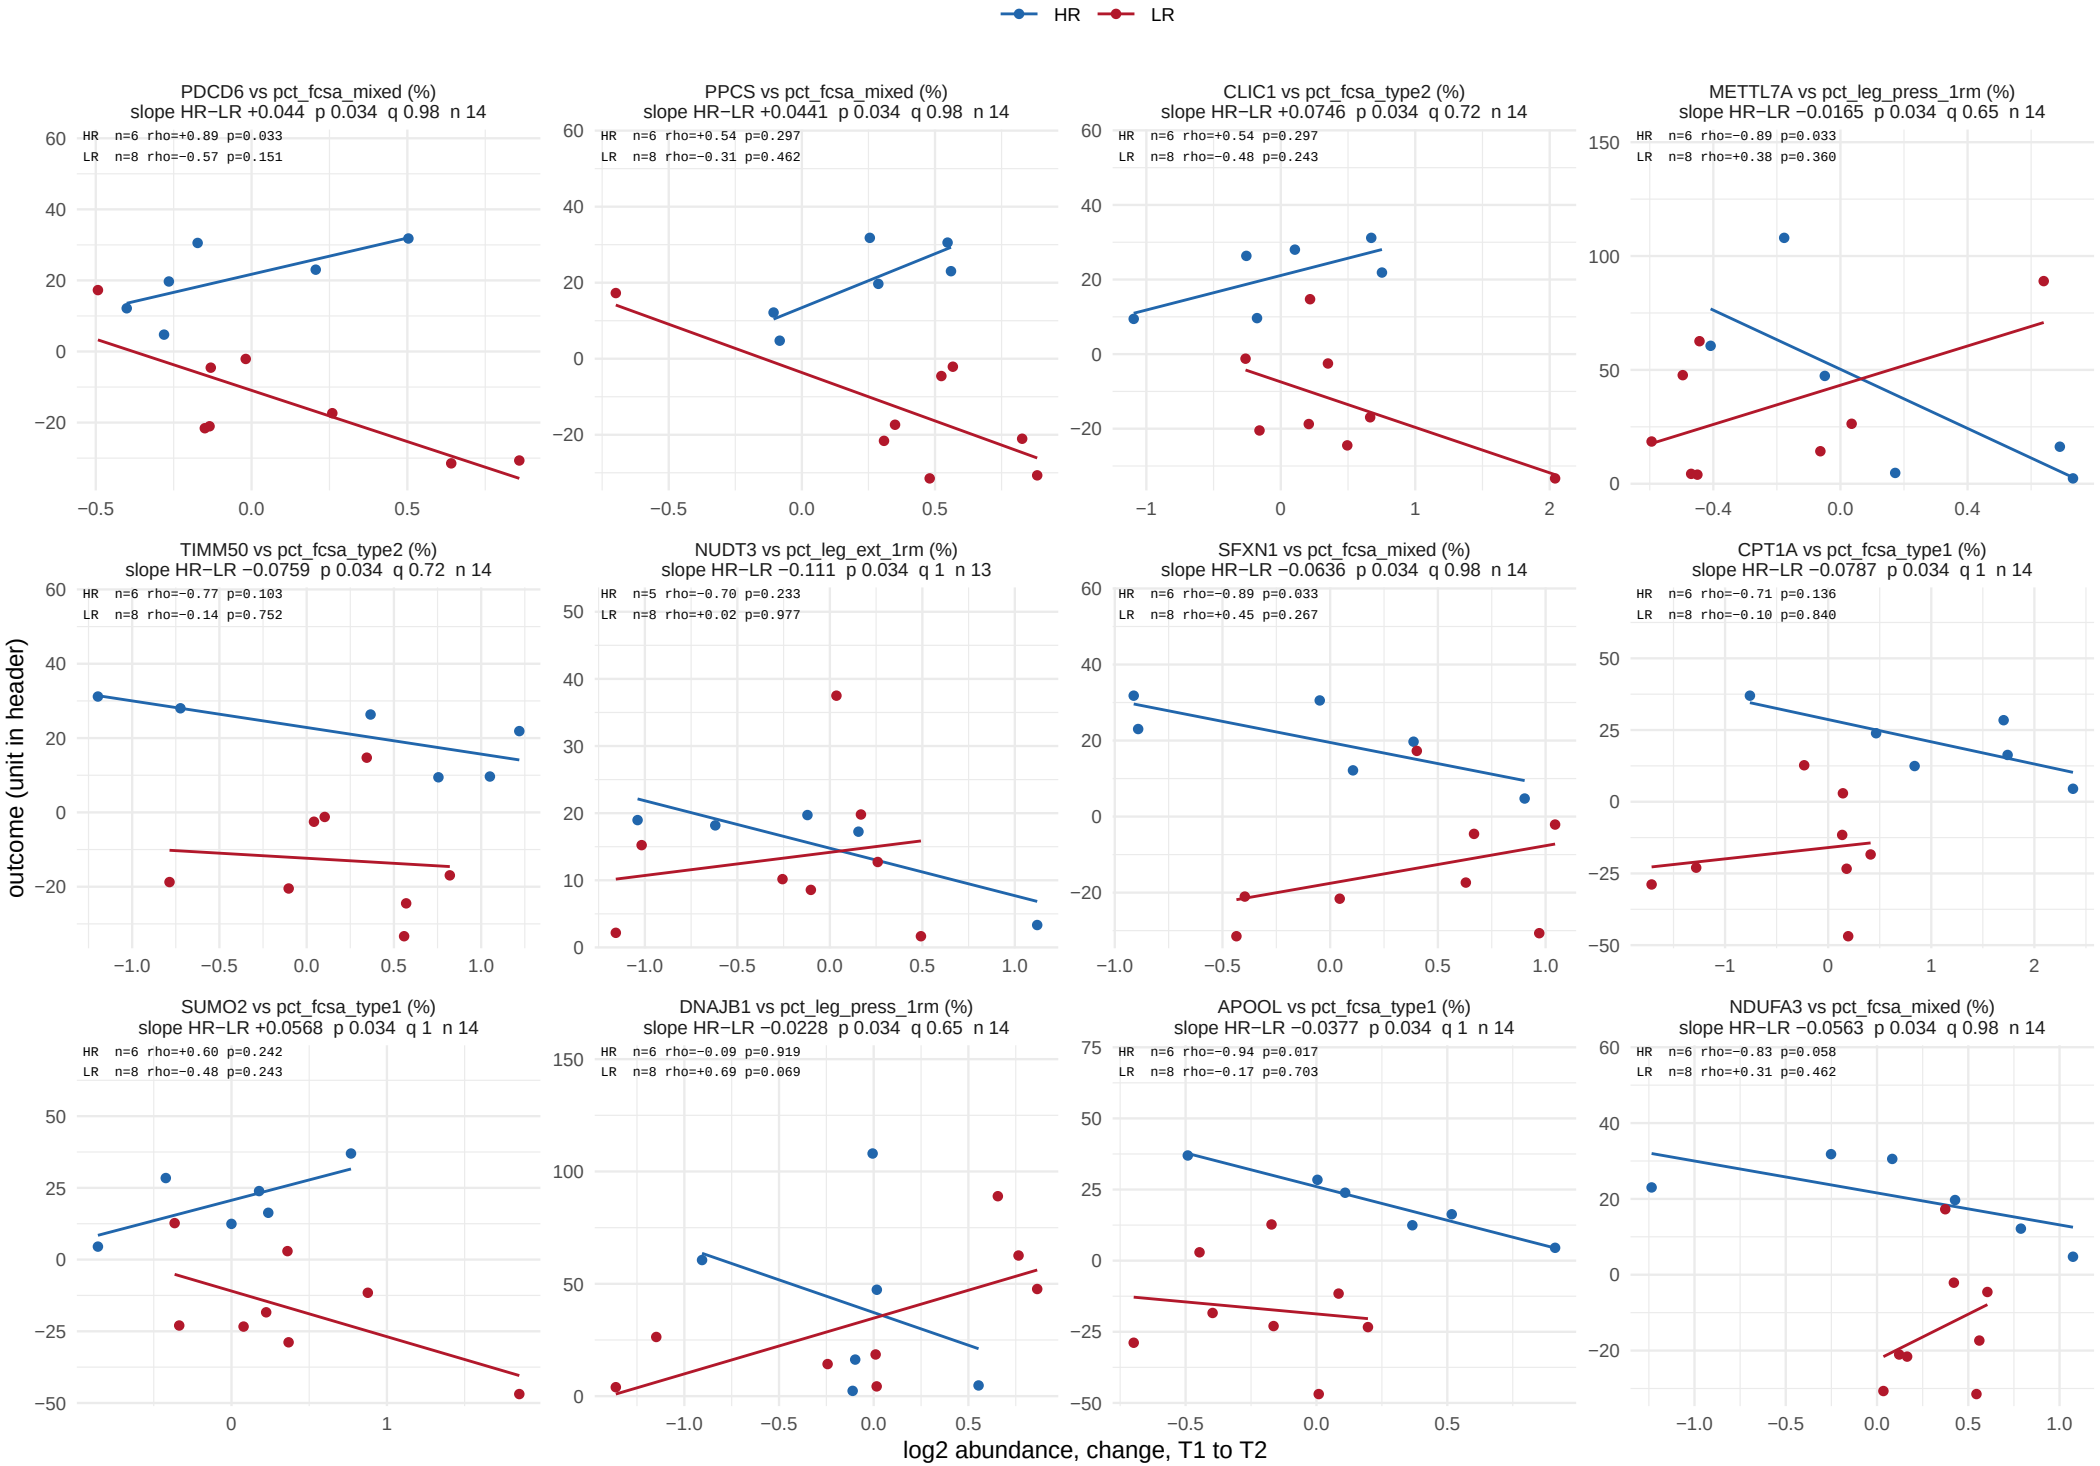

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


665 of 13300 feature−outcome pairs at p < 0.05, 11 at BH < 0.05. Page 41 of 56.

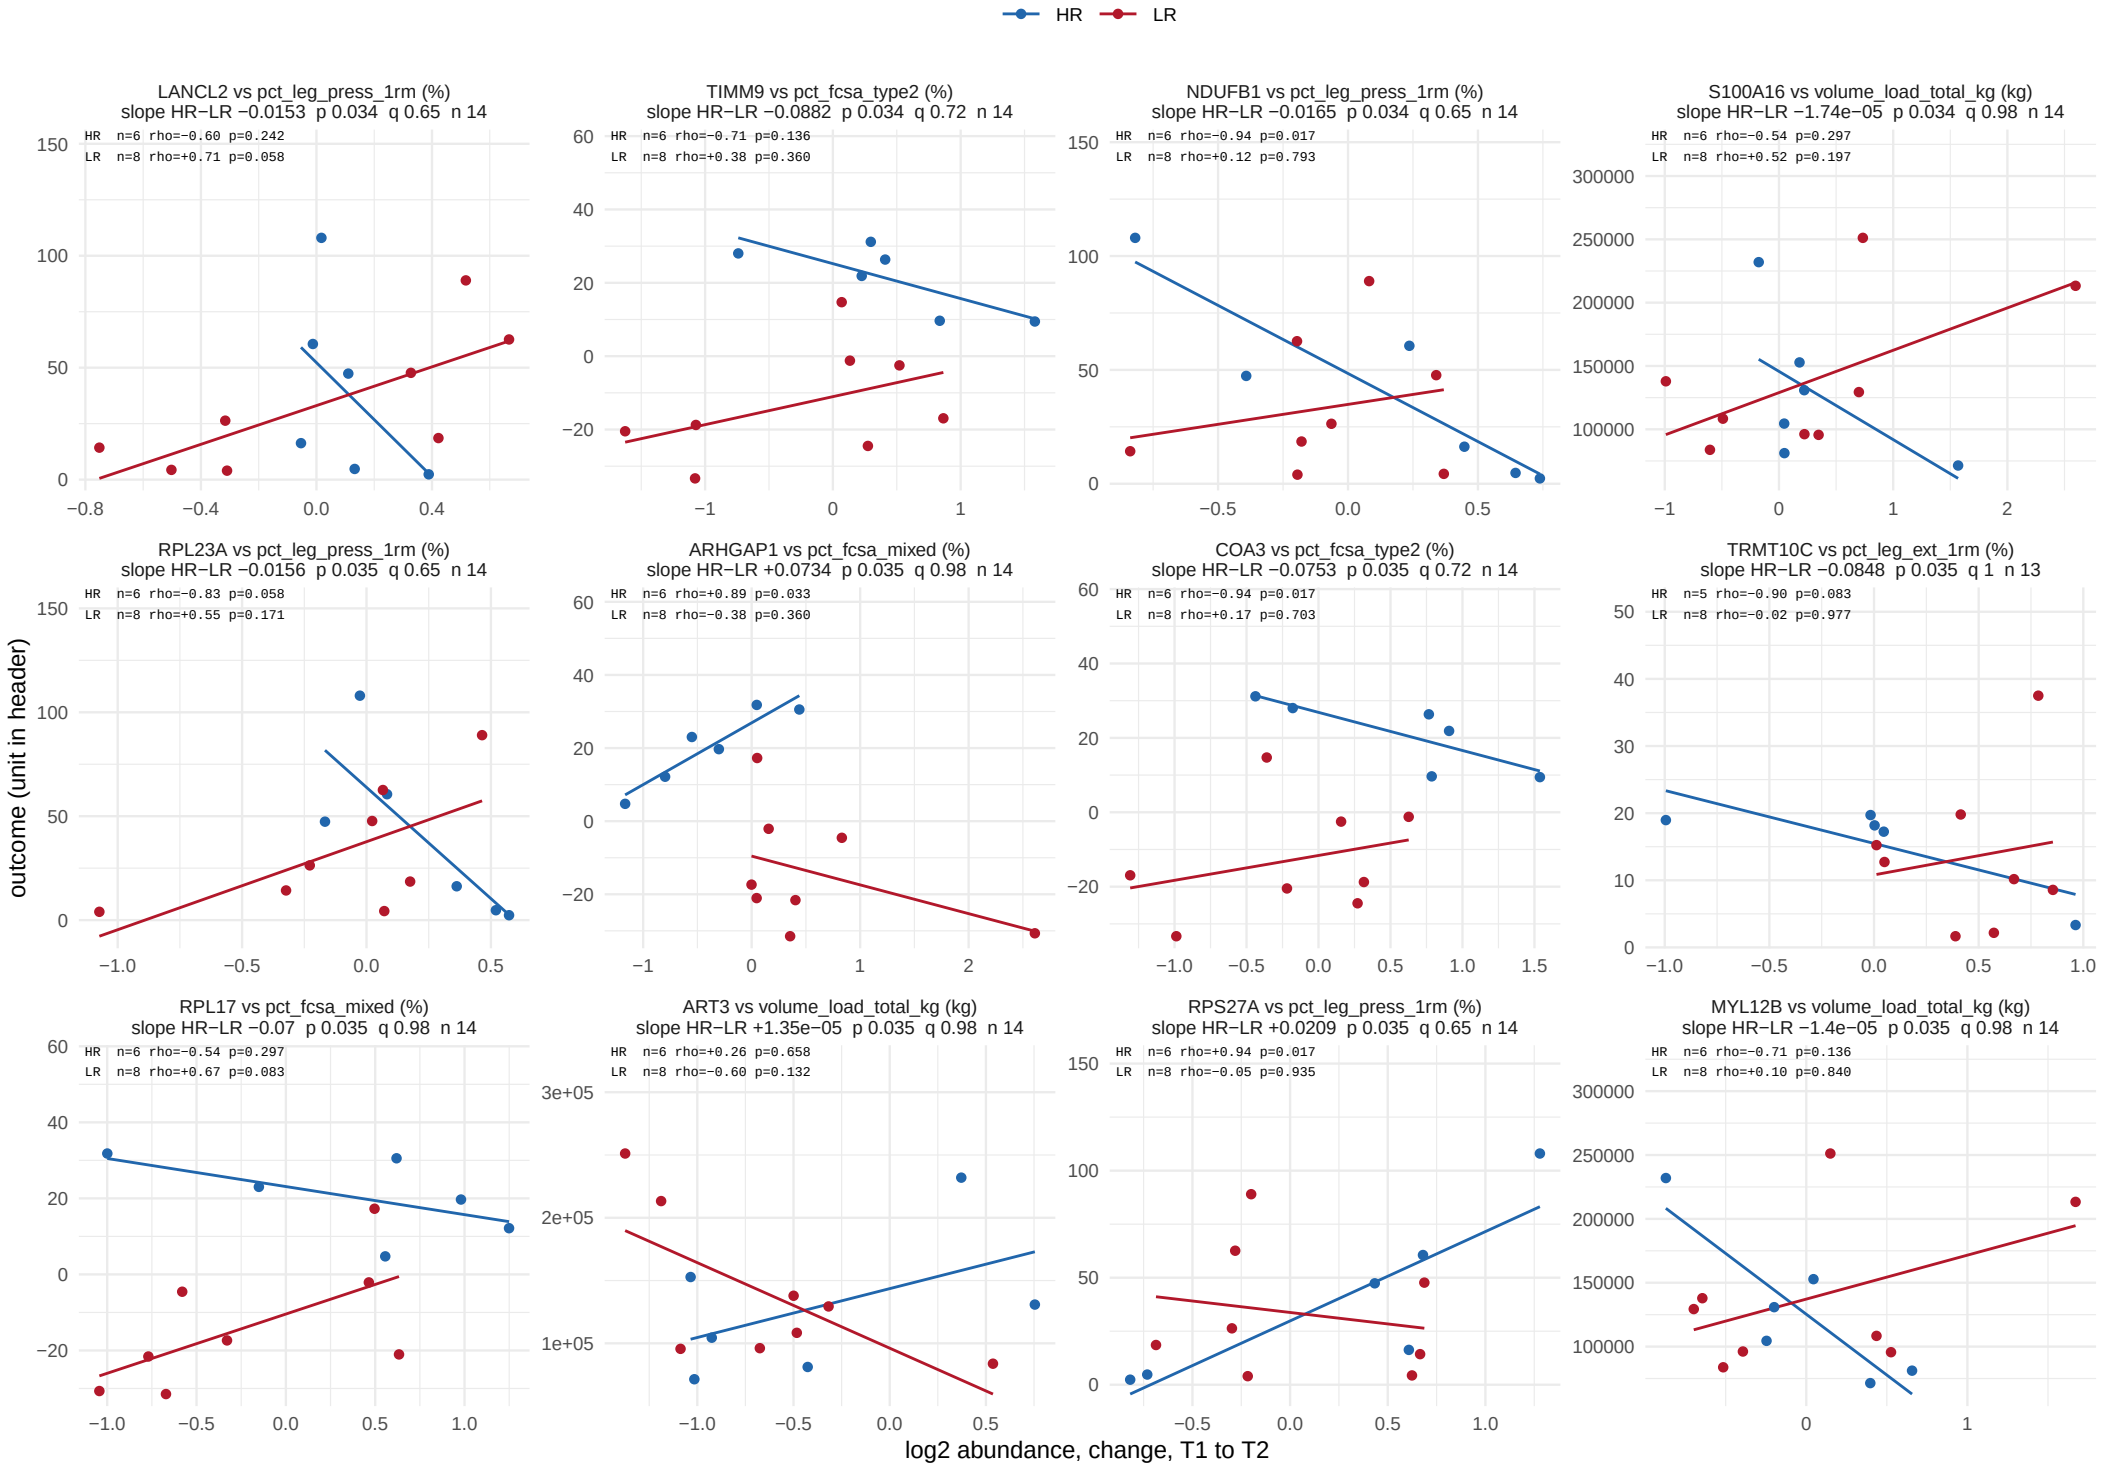

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


665 of 13300 feature−outcome pairs at p < 0.05, 11 at BH < 0.05. Page 42 of 56.

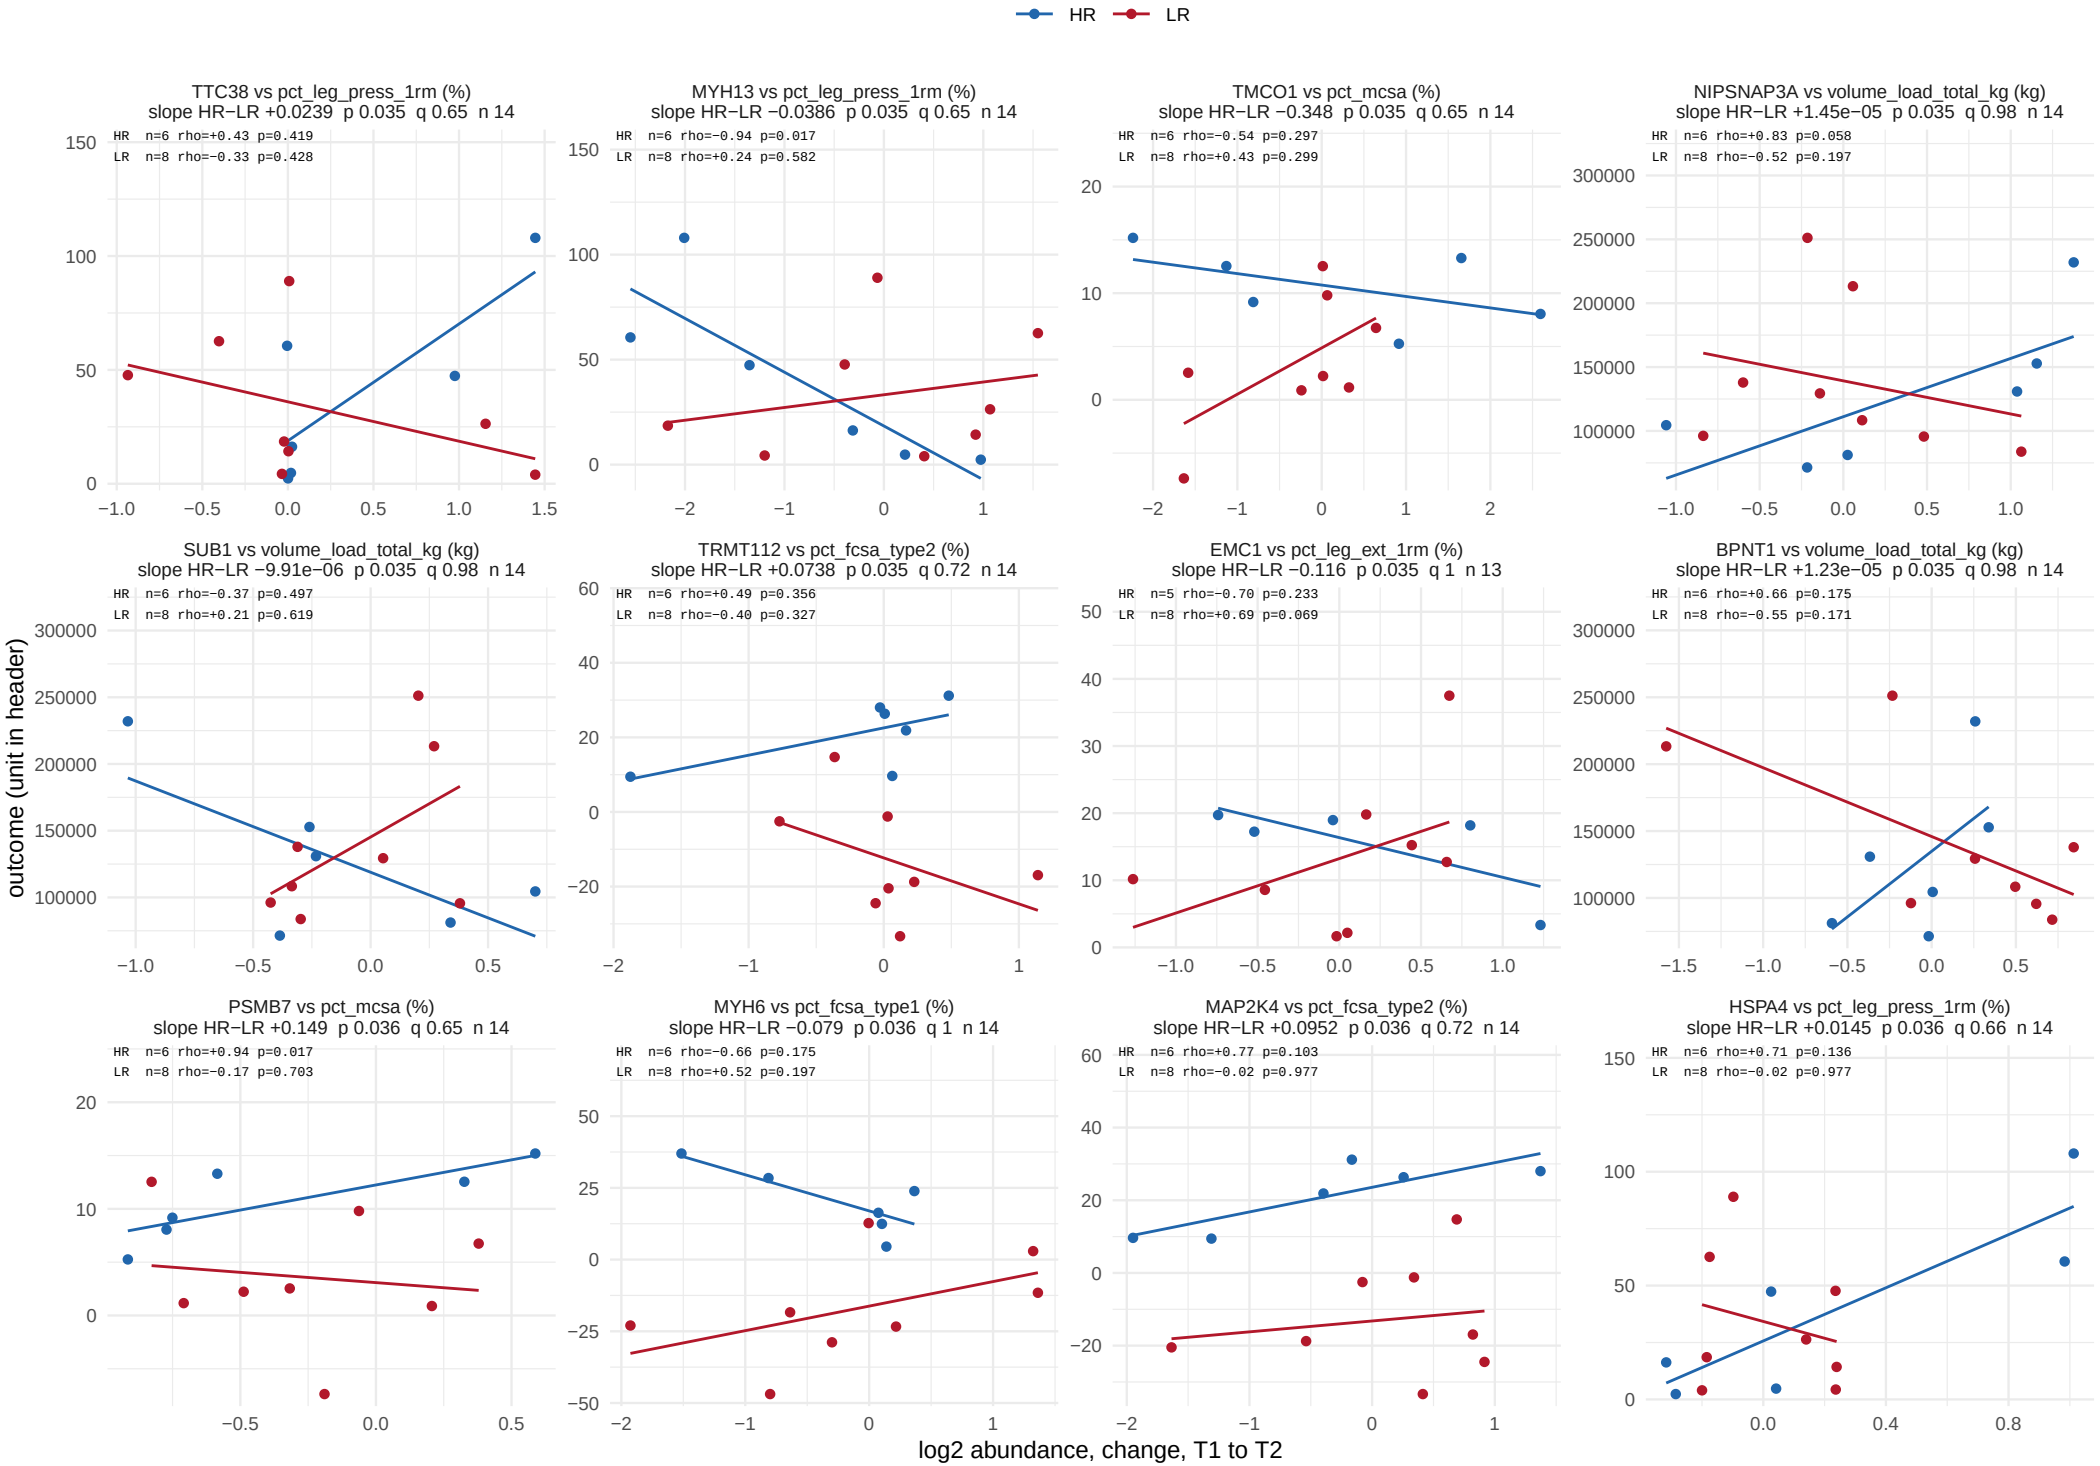

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


665 of 13300 feature−outcome pairs at p < 0.05, 11 at BH < 0.05. Page 43 of 56.

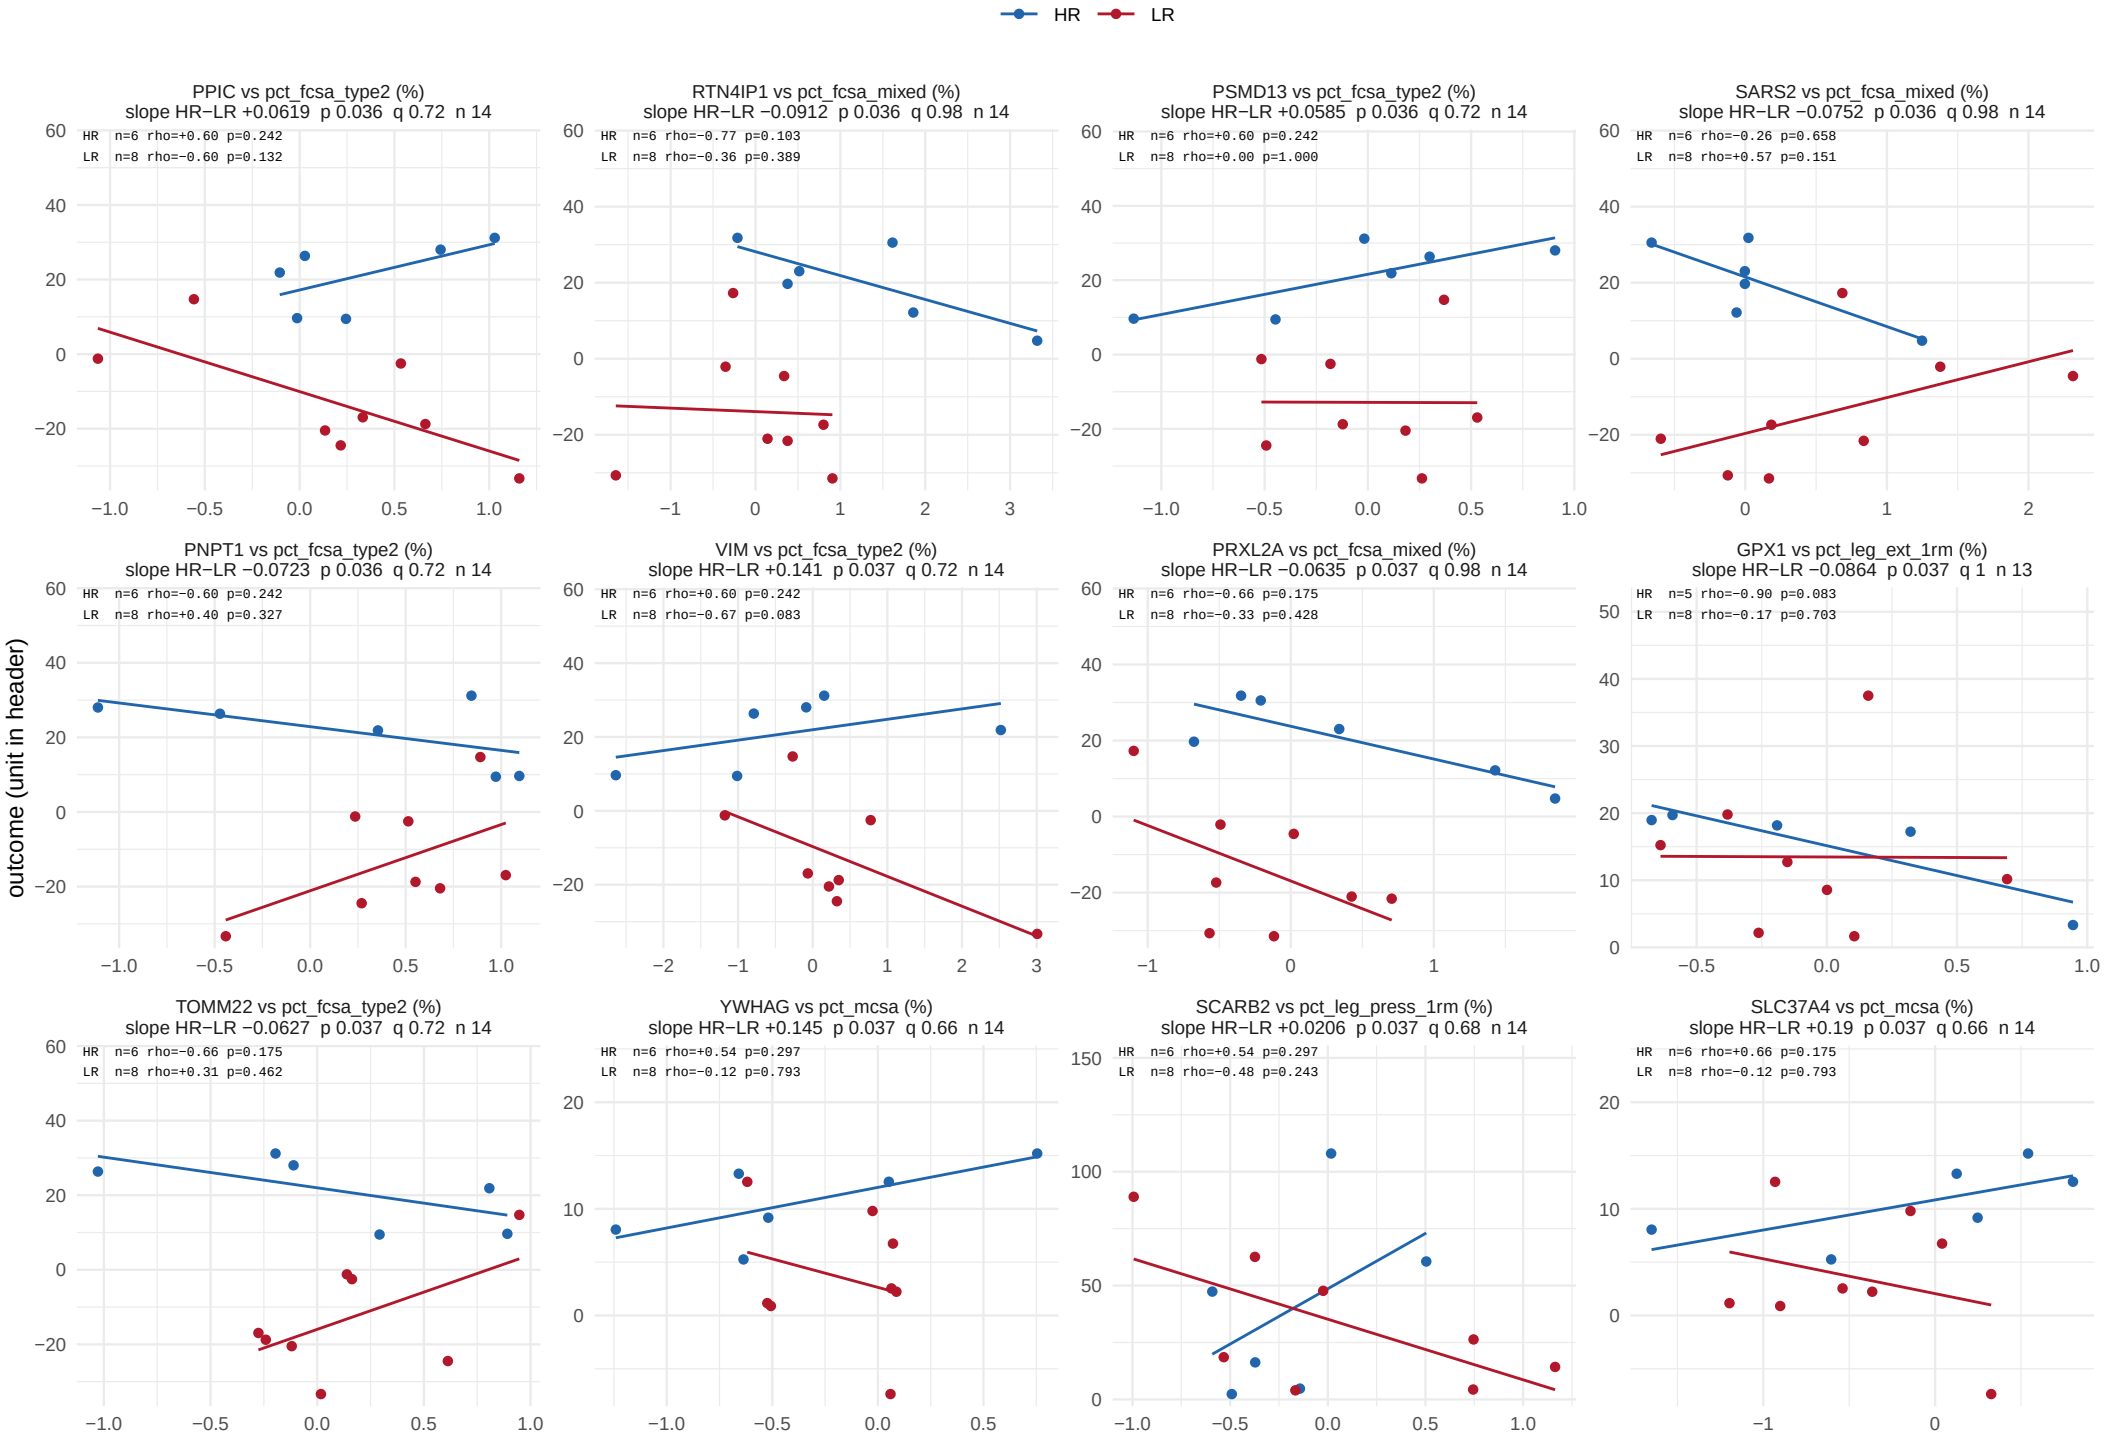

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window

665 of 13300 feature−outcome pairs at p < 0.05, 11 at BH < 0.05. Page 44 of 56.

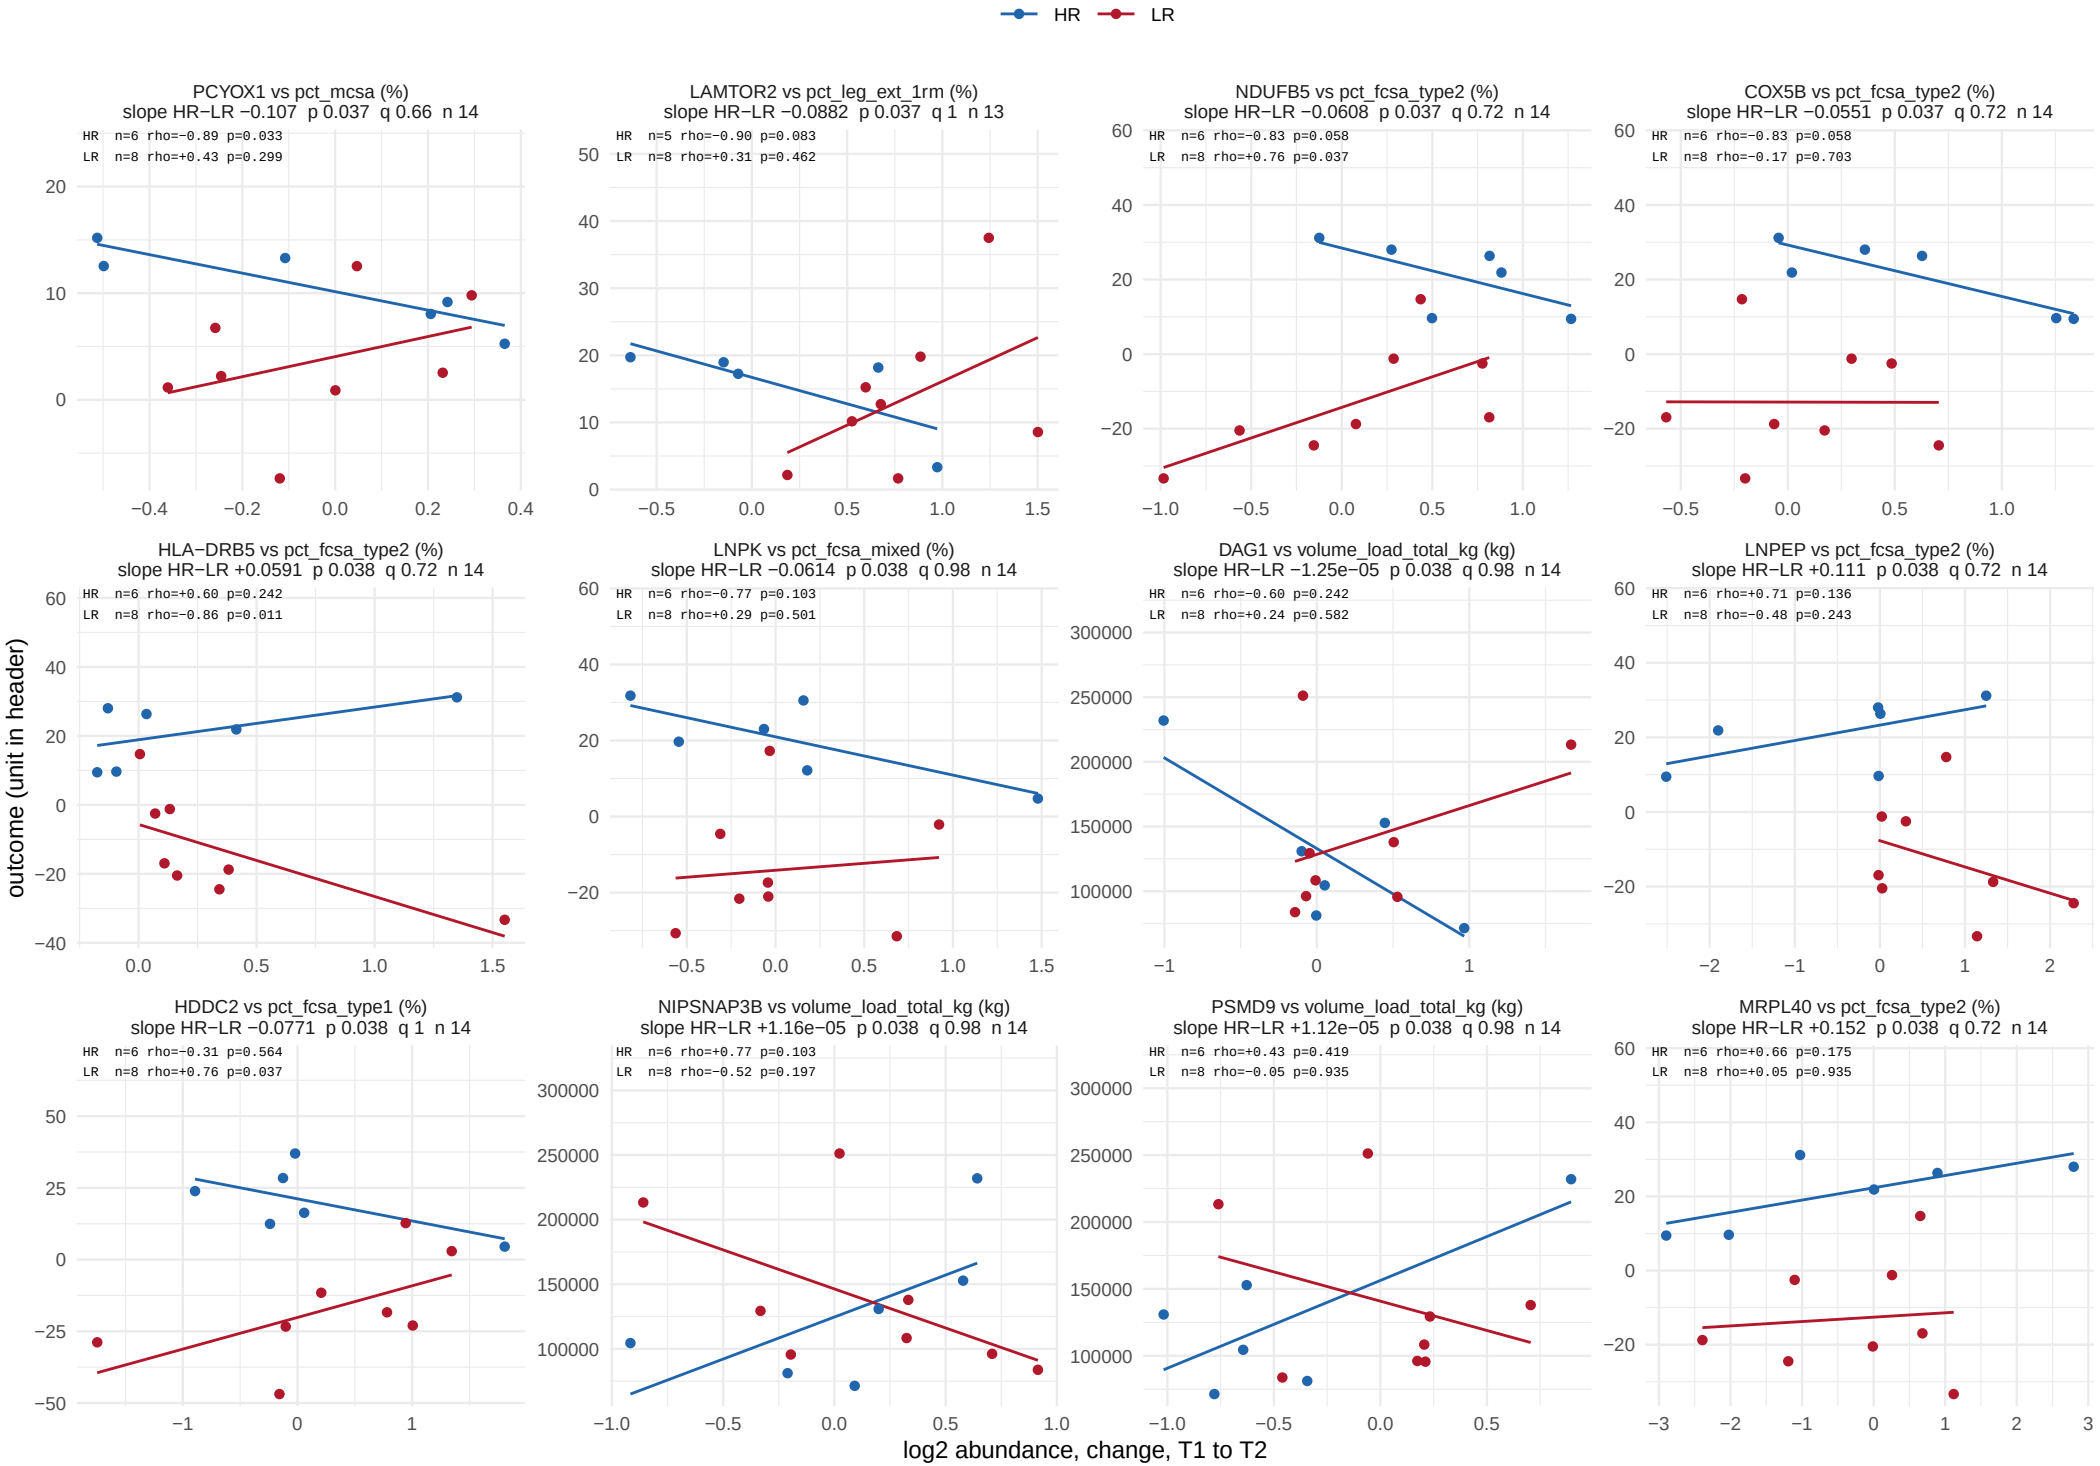

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


665 of 13300 feature−outcome pairs at p < 0.05, 11 at BH < 0.05. Page 45 of 56.



One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


665 of 13300 feature−outcome pairs at p < 0.05, 11 at BH < 0.05. Page 46 of 56.

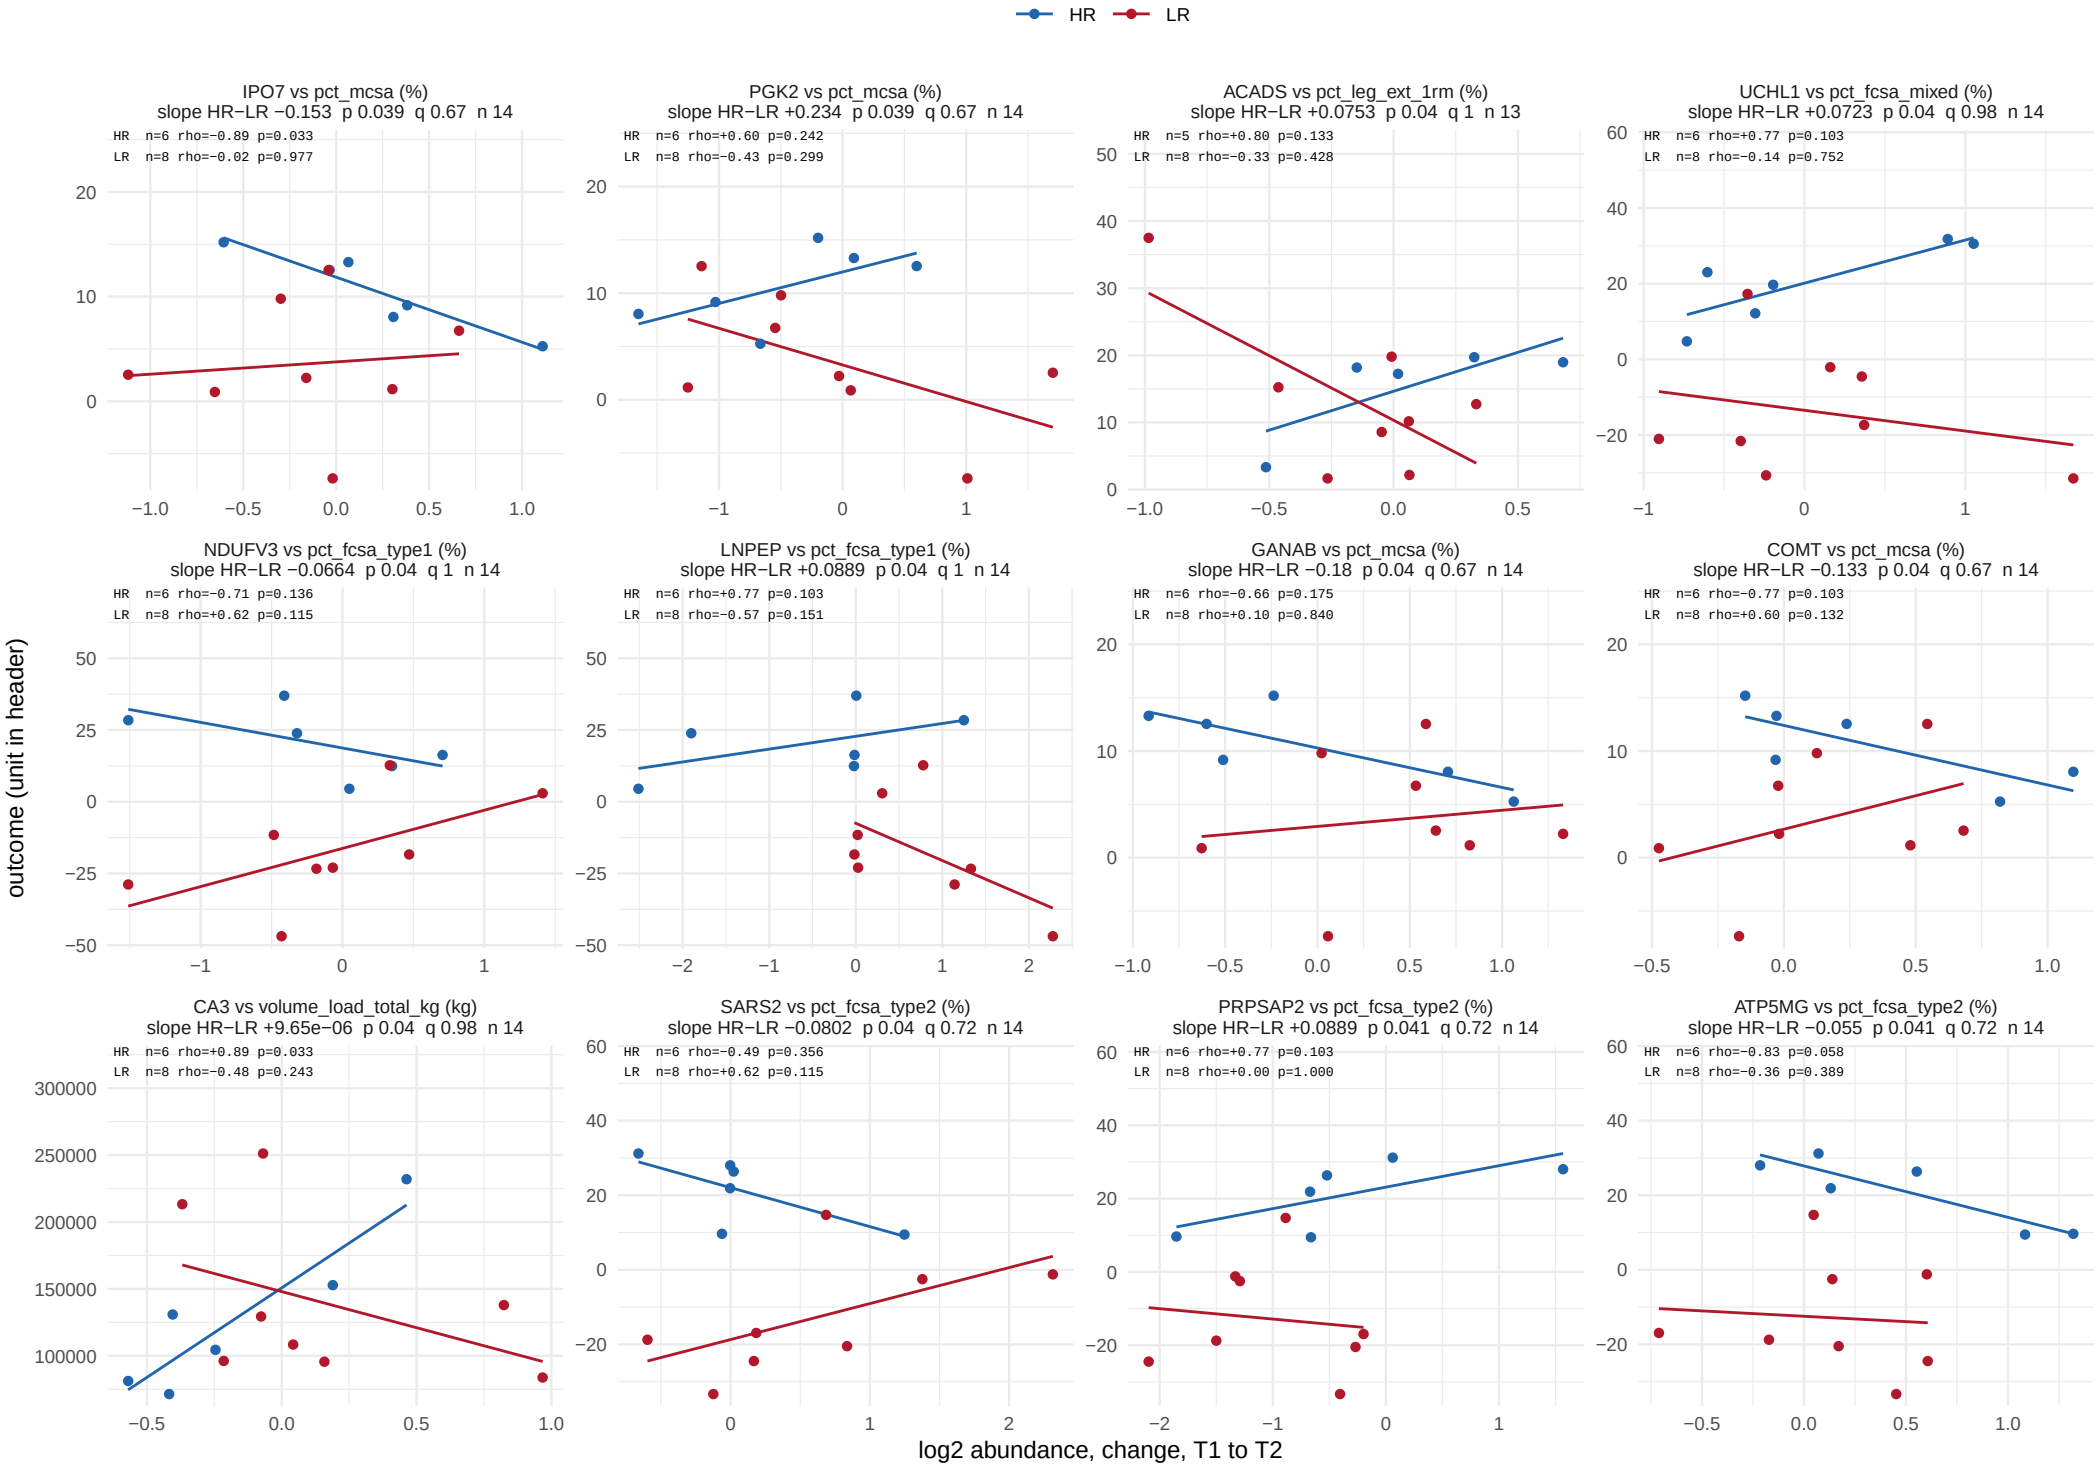

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


665 of 13300 feature−outcome pairs at p < 0.05, 11 at BH < 0.05. Page 47 of 56.

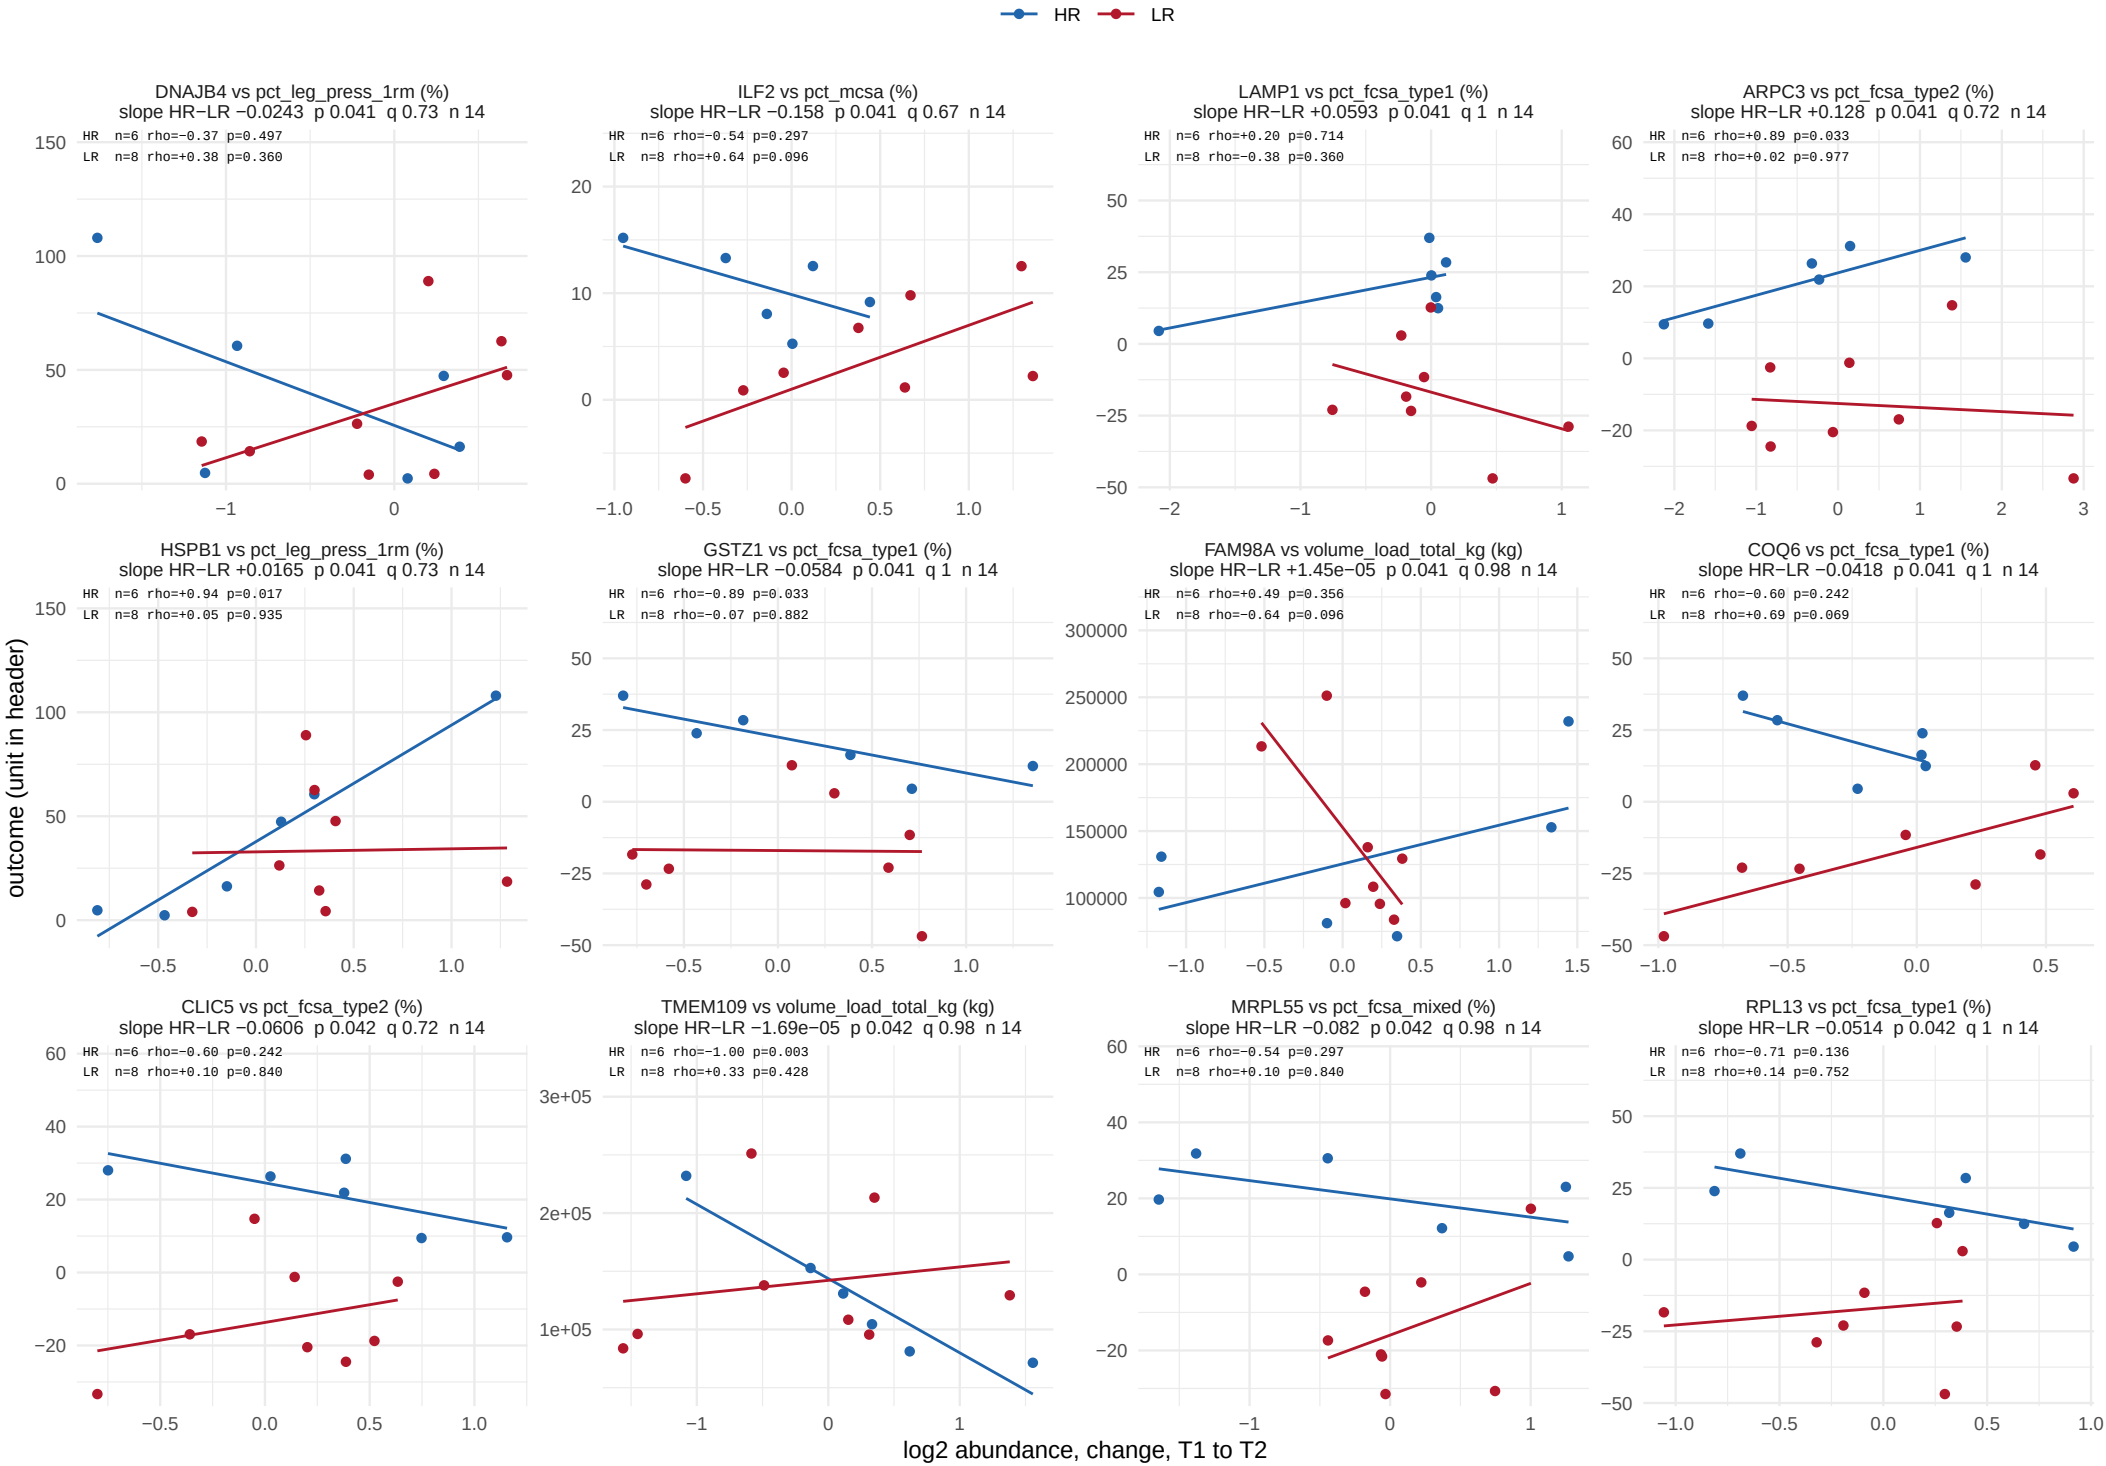

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


665 of 13300 feature−outcome pairs at p < 0.05, 11 at BH < 0.05. Page 48 of 56.

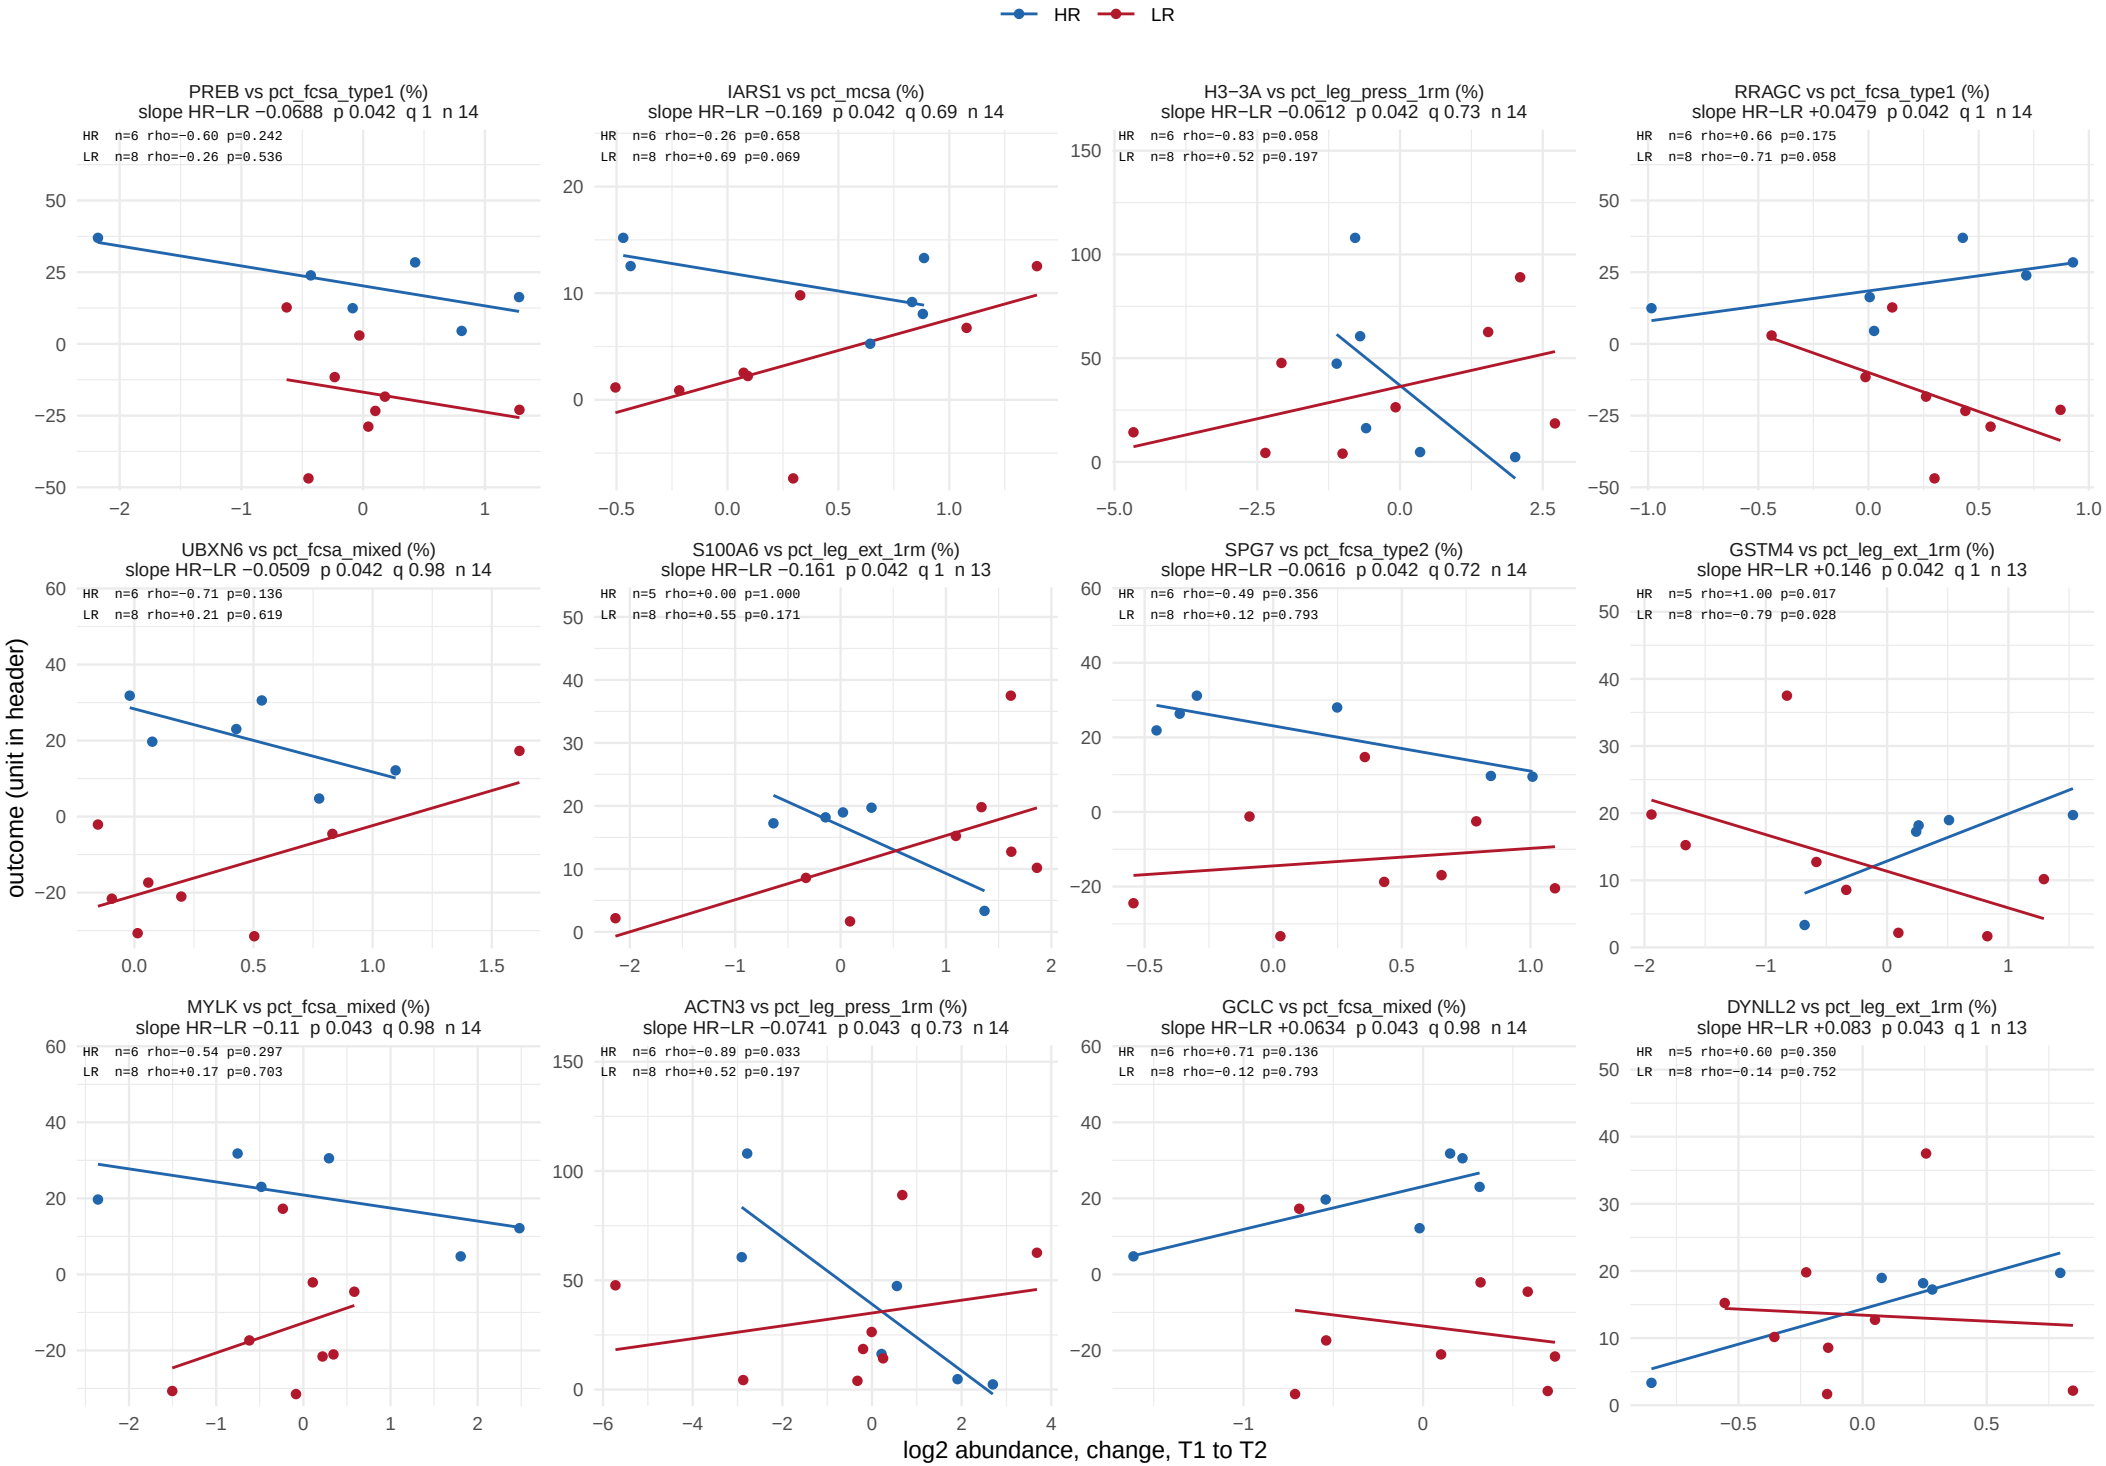

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


665 of 13300 feature−outcome pairs at p < 0.05, 11 at BH < 0.05. Page 49 of 56.

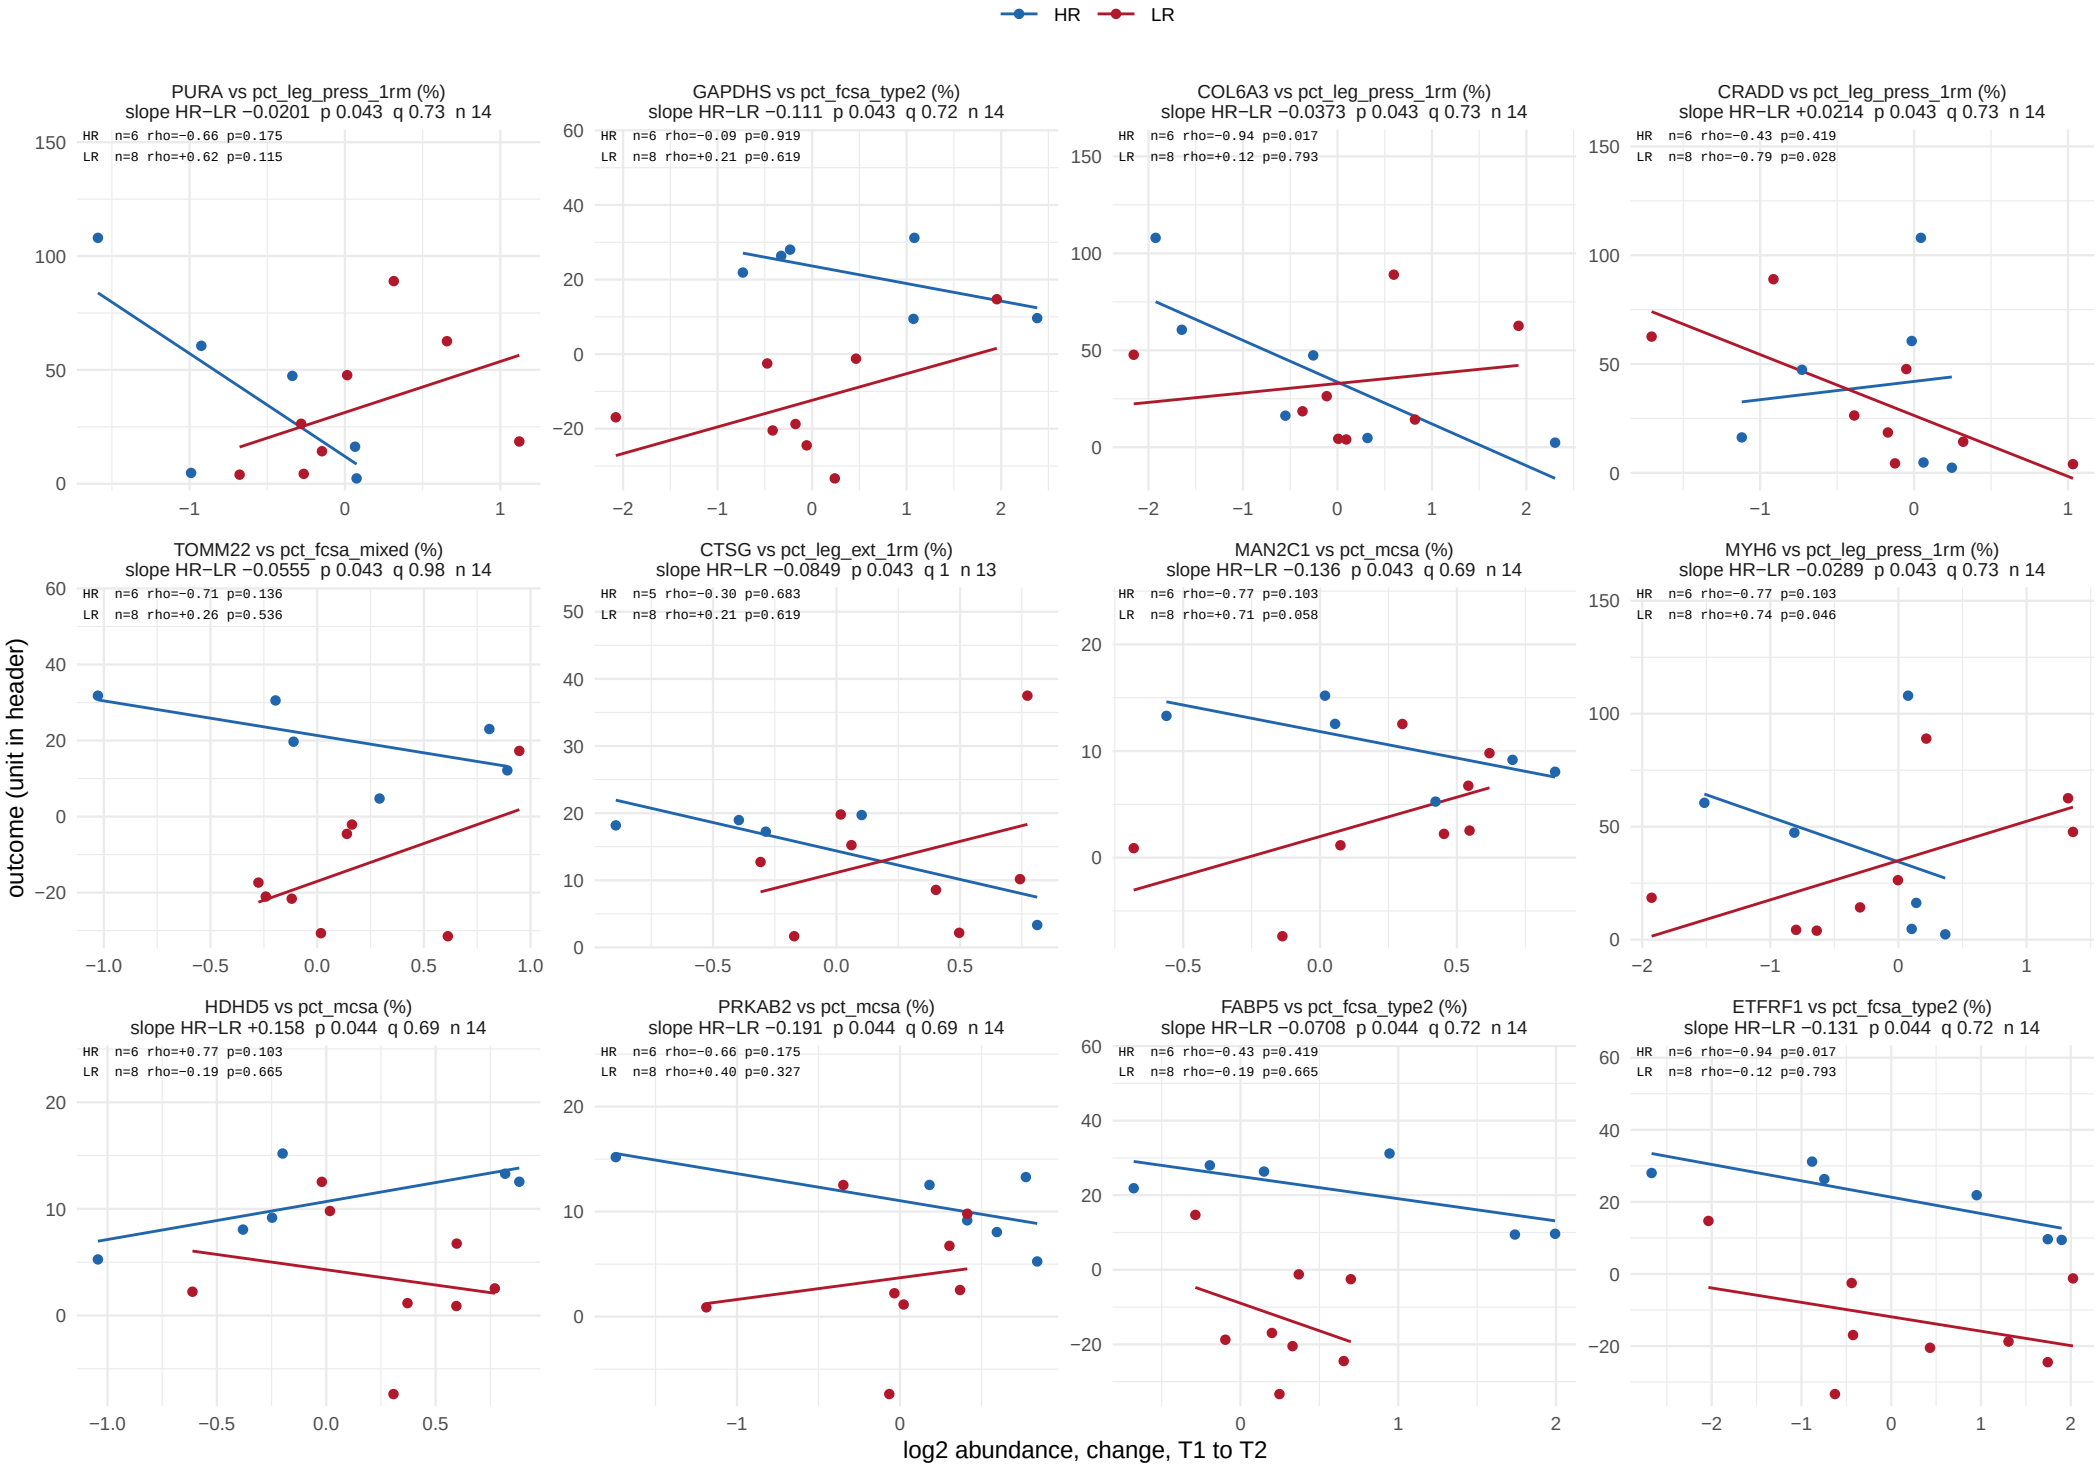

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


665 of 13300 feature−outcome pairs at p < 0.05, 11 at BH < 0.05. Page 50 of 56.

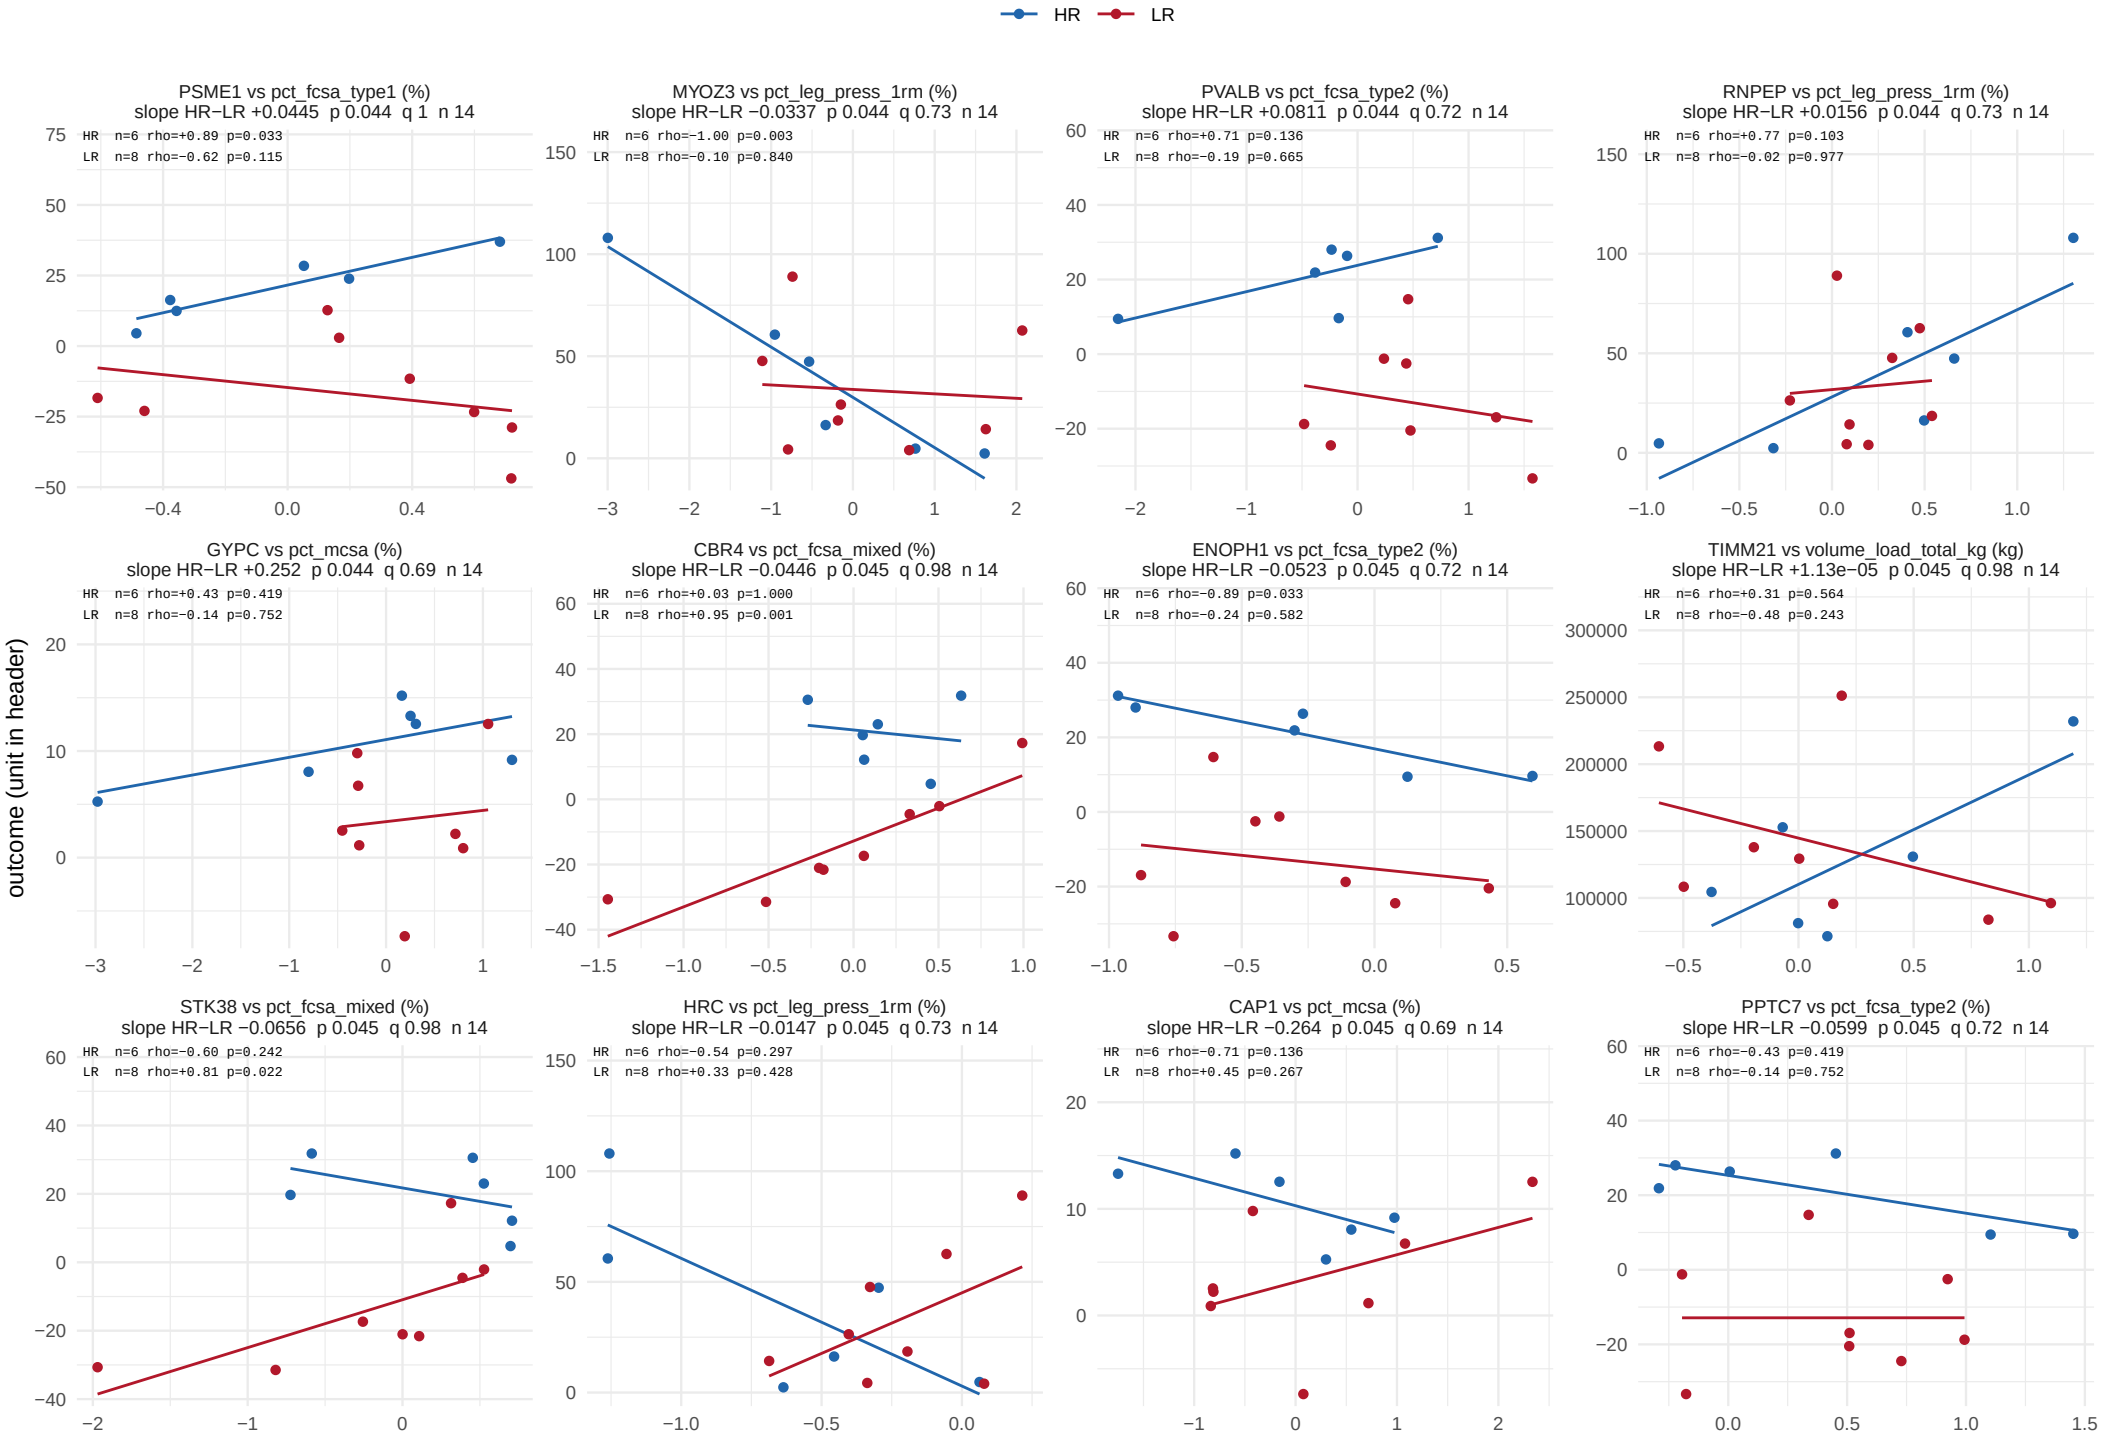

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


665 of 13300 feature−outcome pairs at p < 0.05, 11 at BH < 0.05. Page 51 of 56.

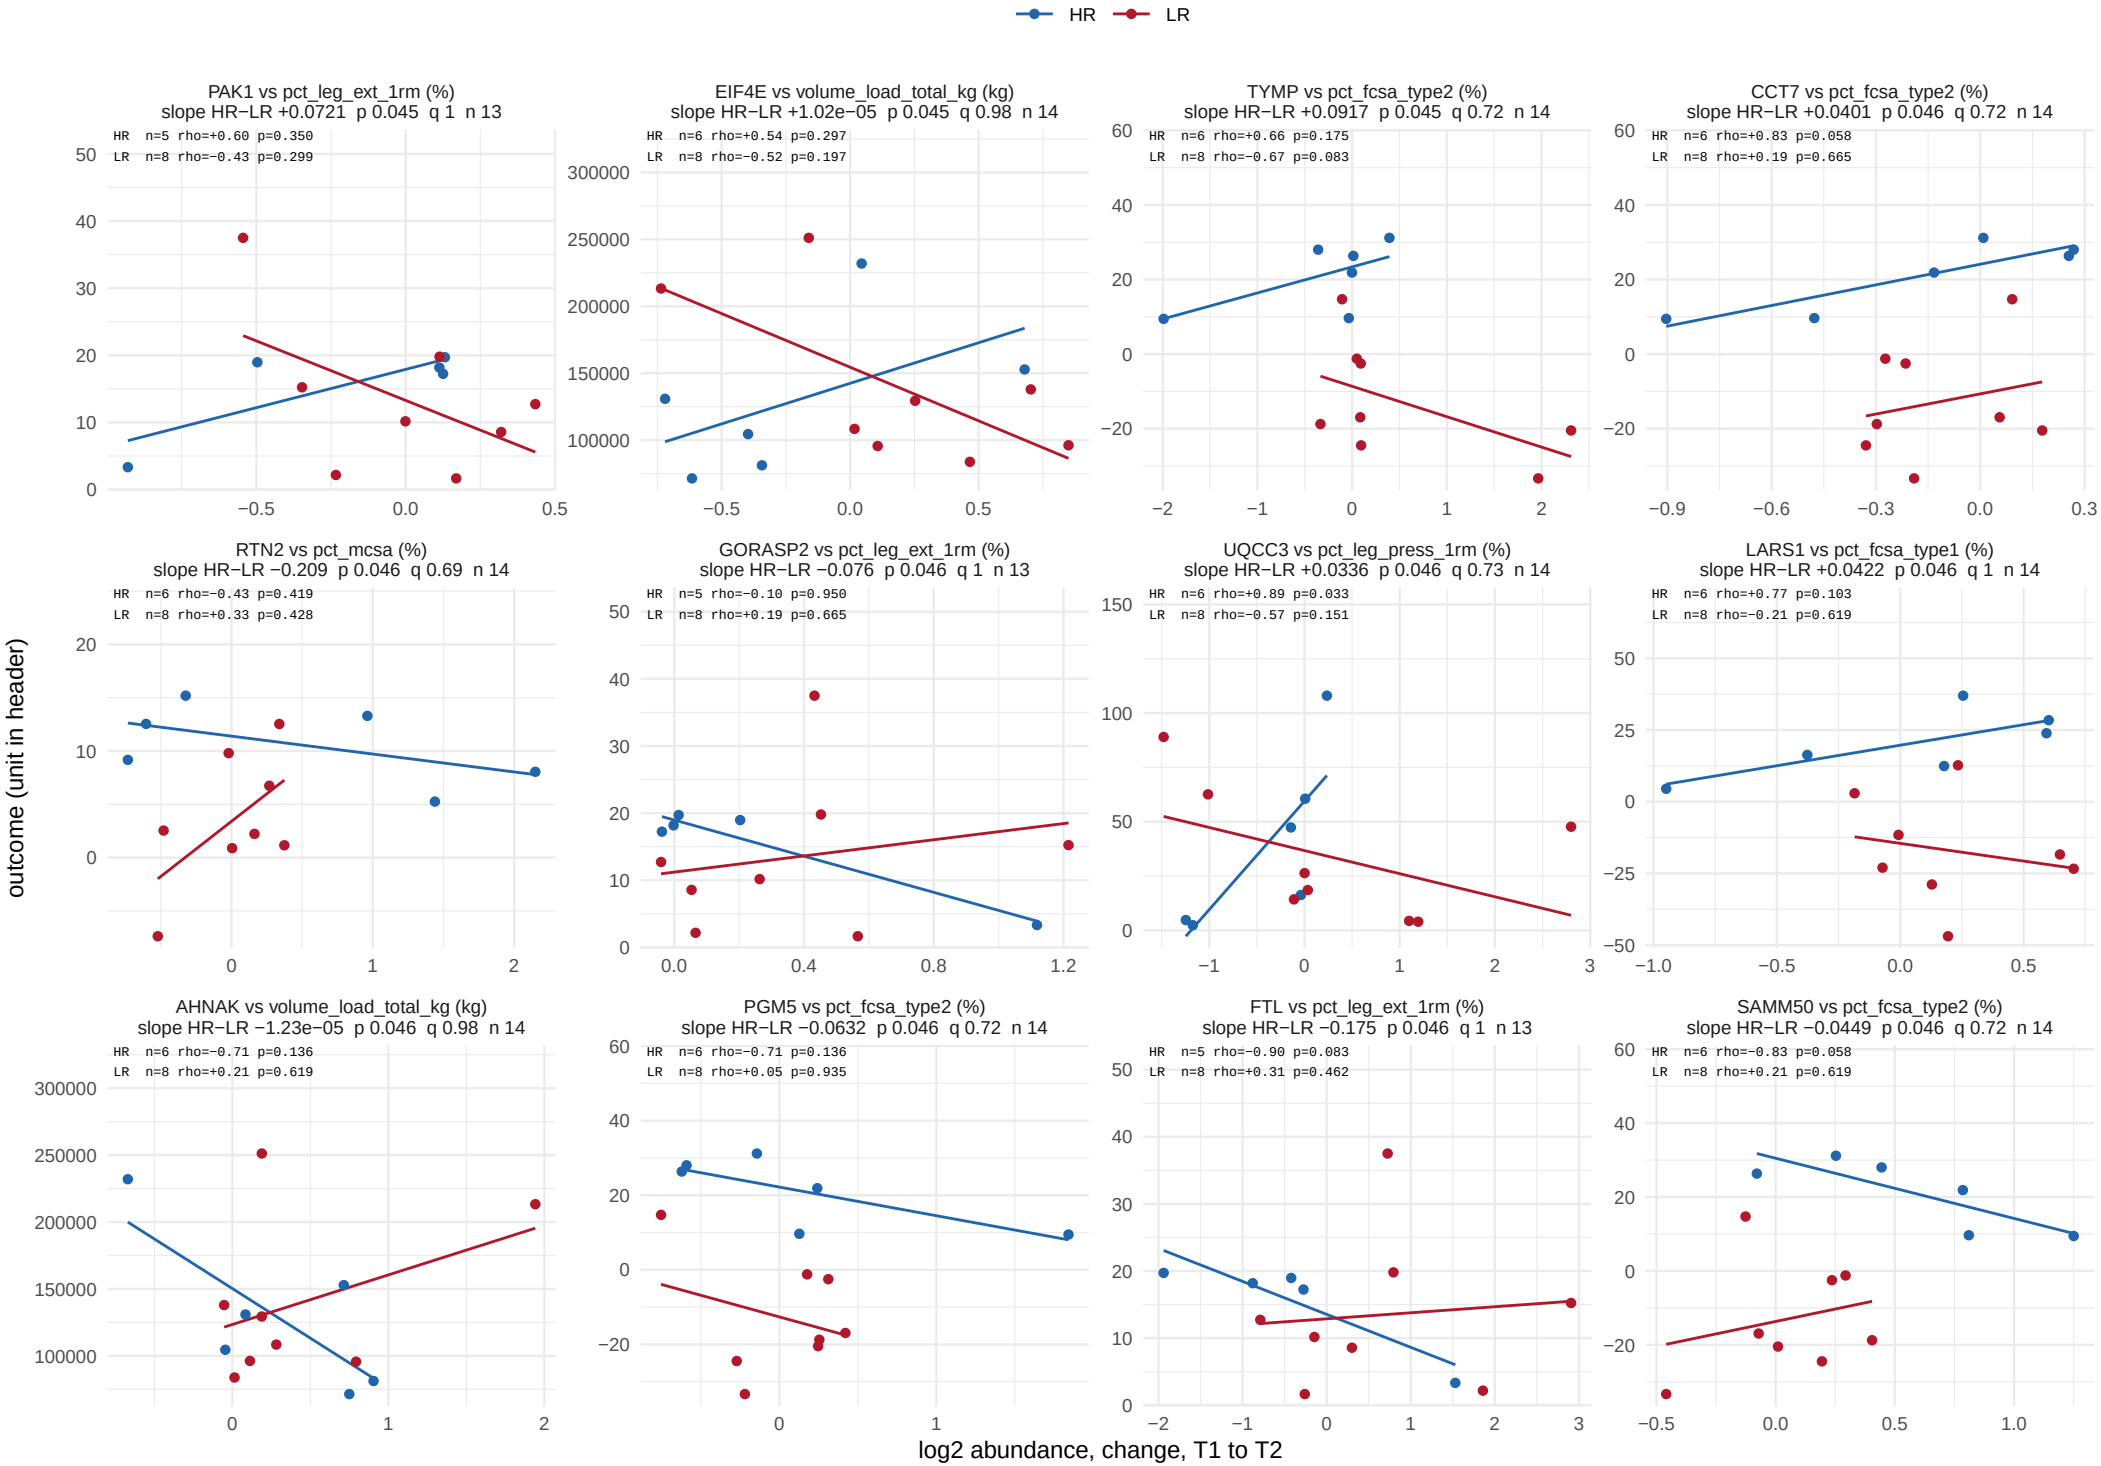

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


665 of 13300 feature−outcome pairs at p < 0.05, 11 at BH < 0.05. Page 52 of 56.

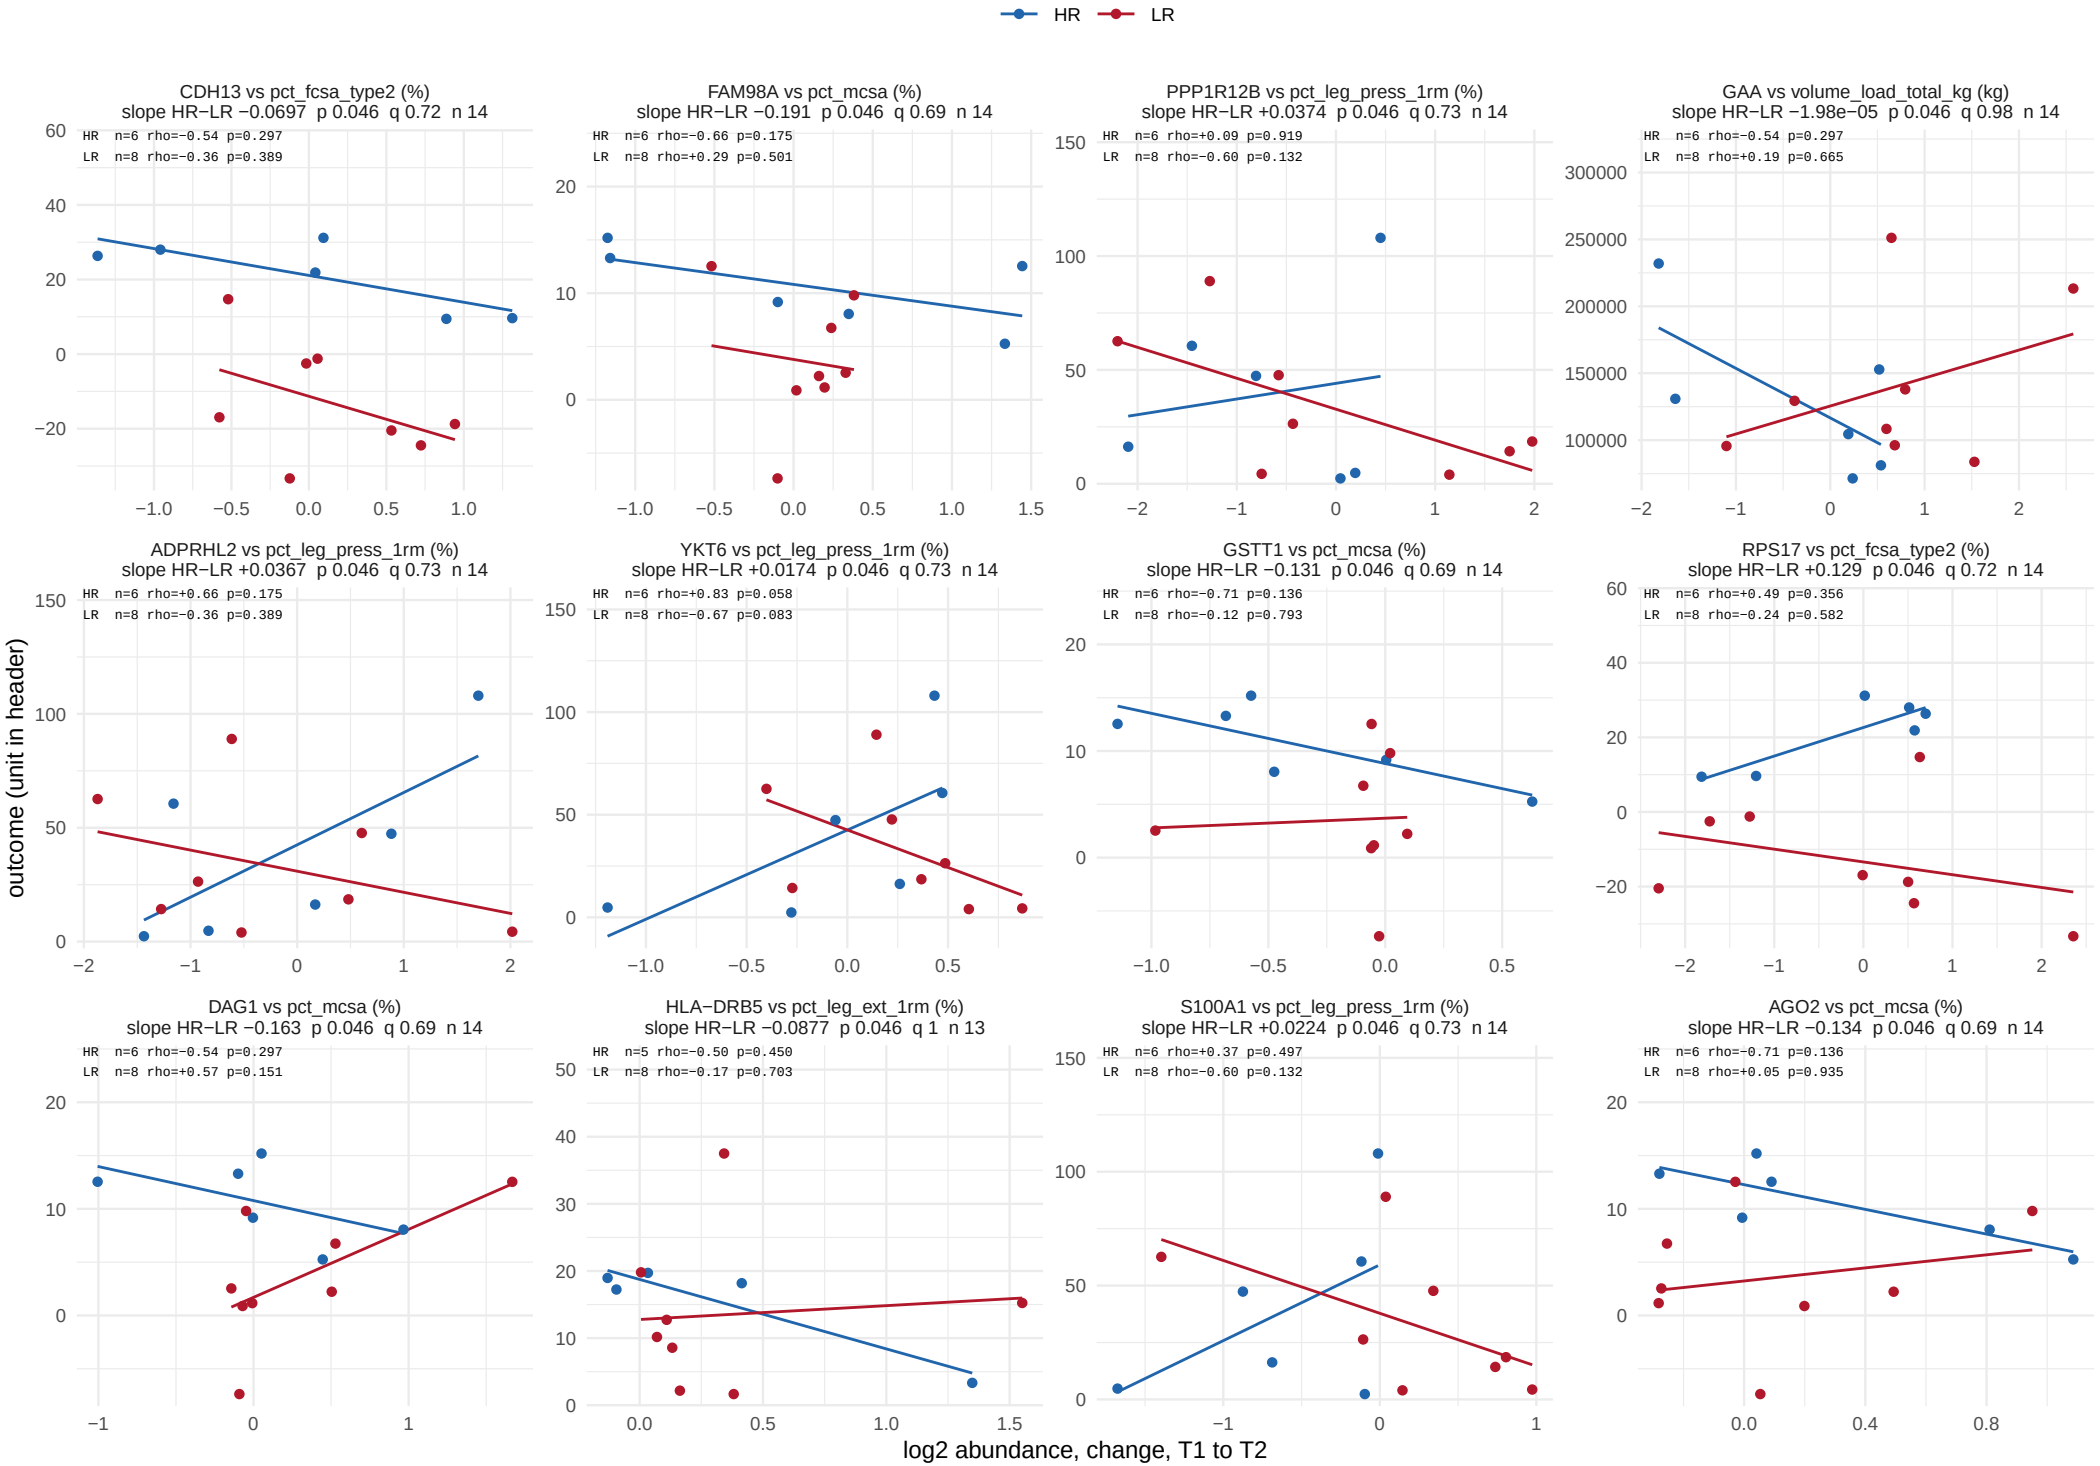

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


665 of 13300 feature−outcome pairs at p < 0.05, 11 at BH < 0.05. Page 53 of 56.

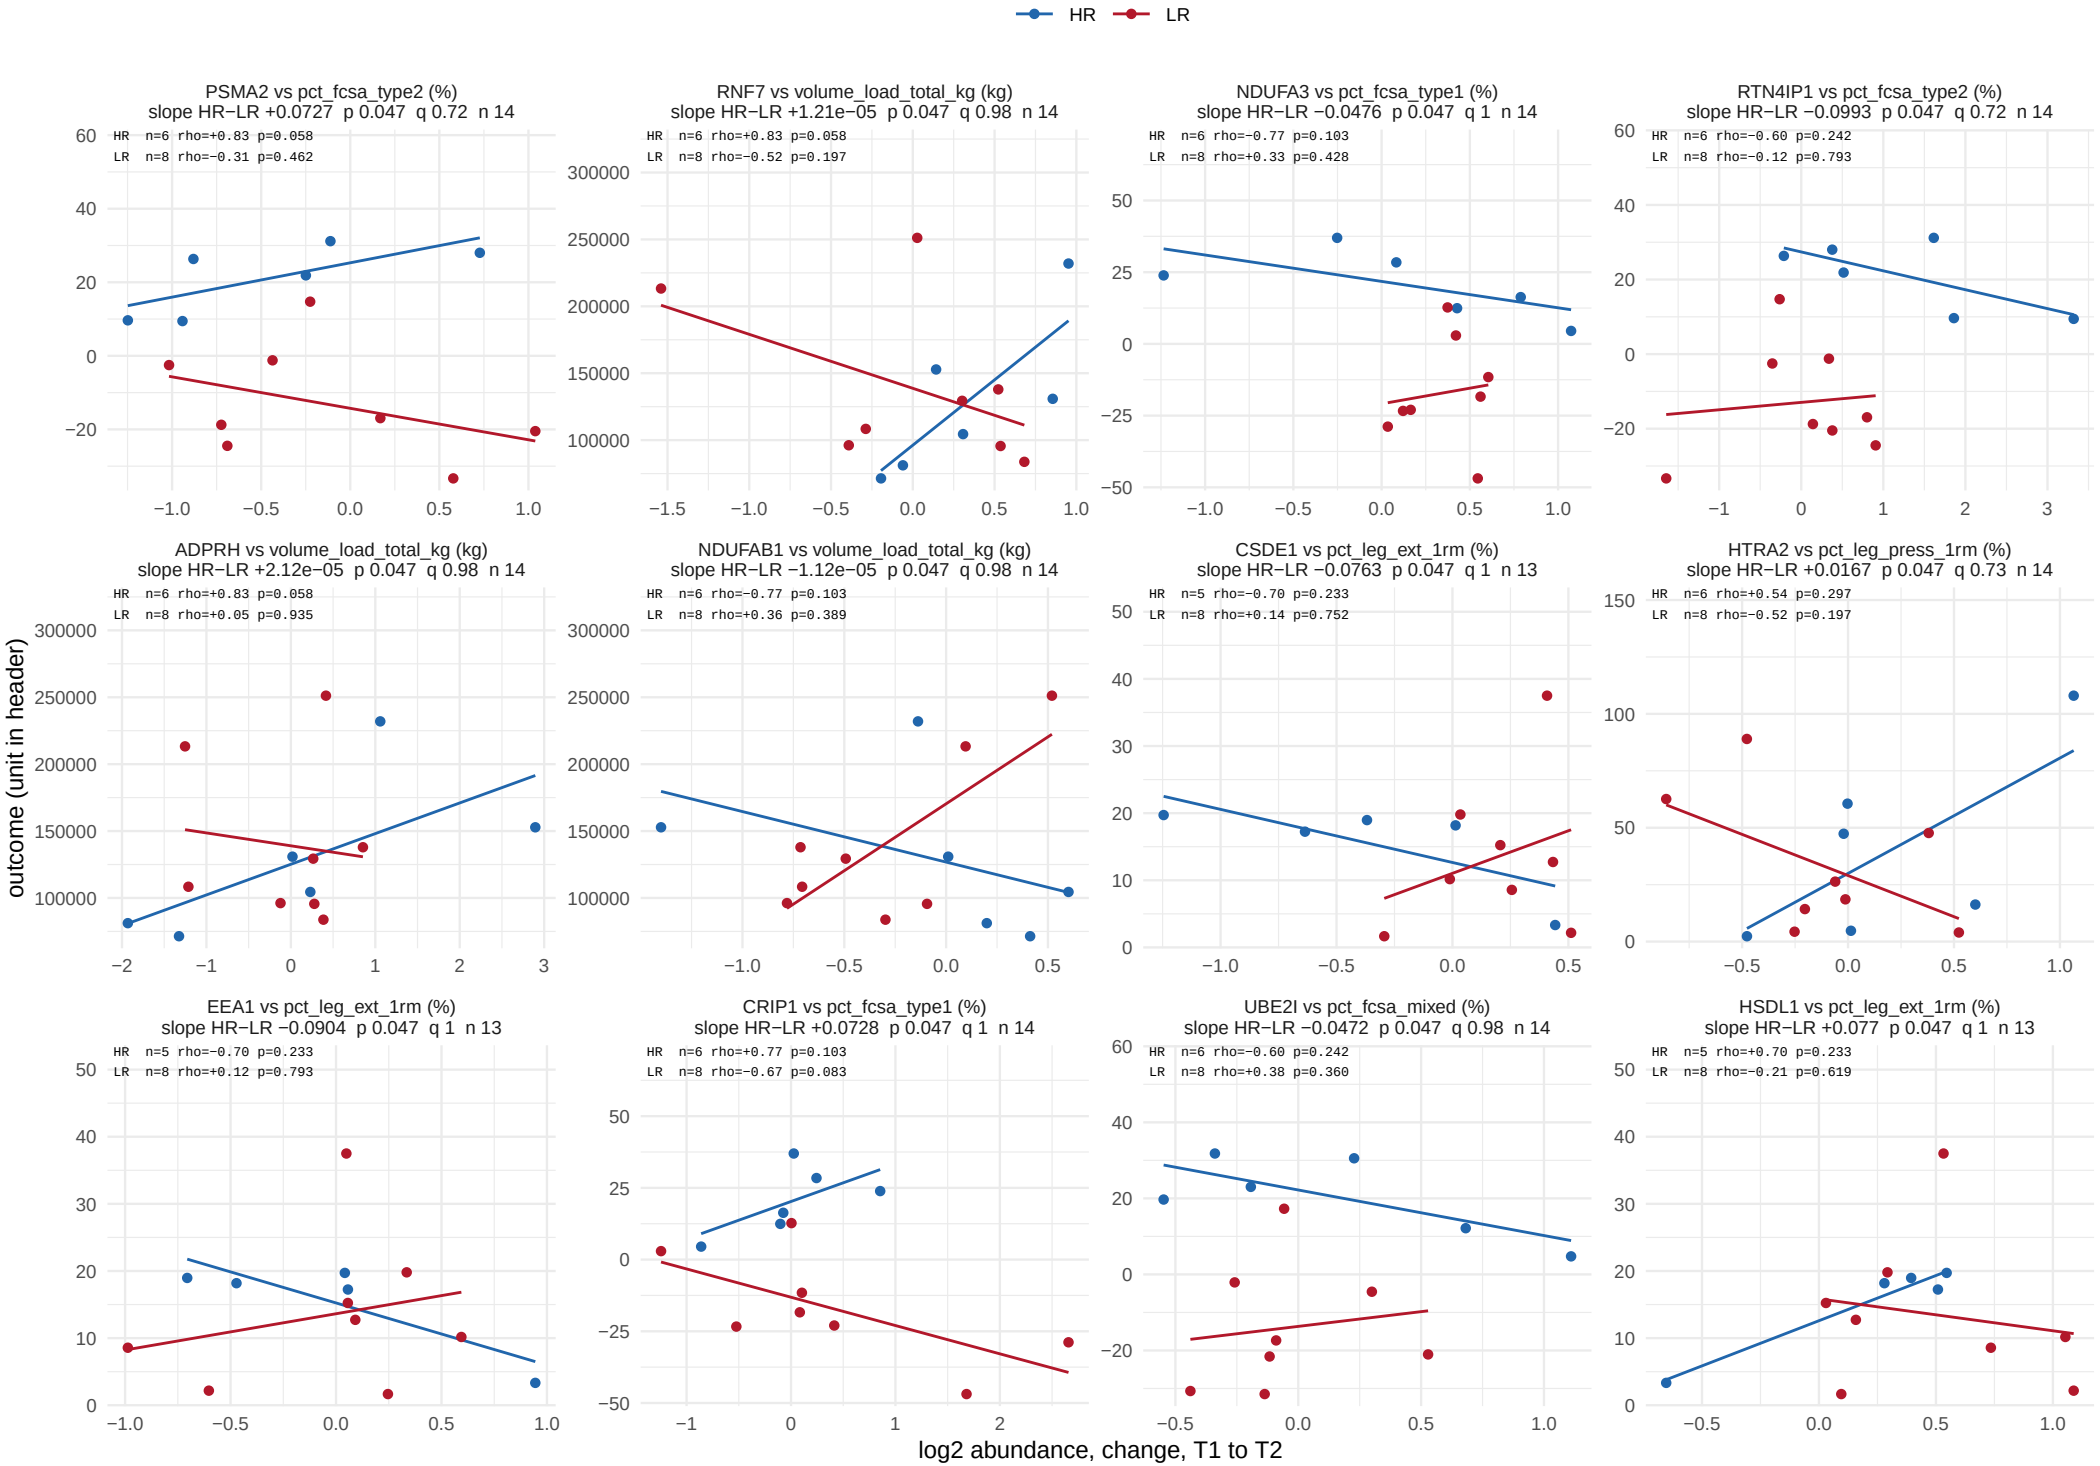

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


665 of 13300 feature−outcome pairs at p < 0.05, 11 at BH < 0.05. Page 54 of 56.

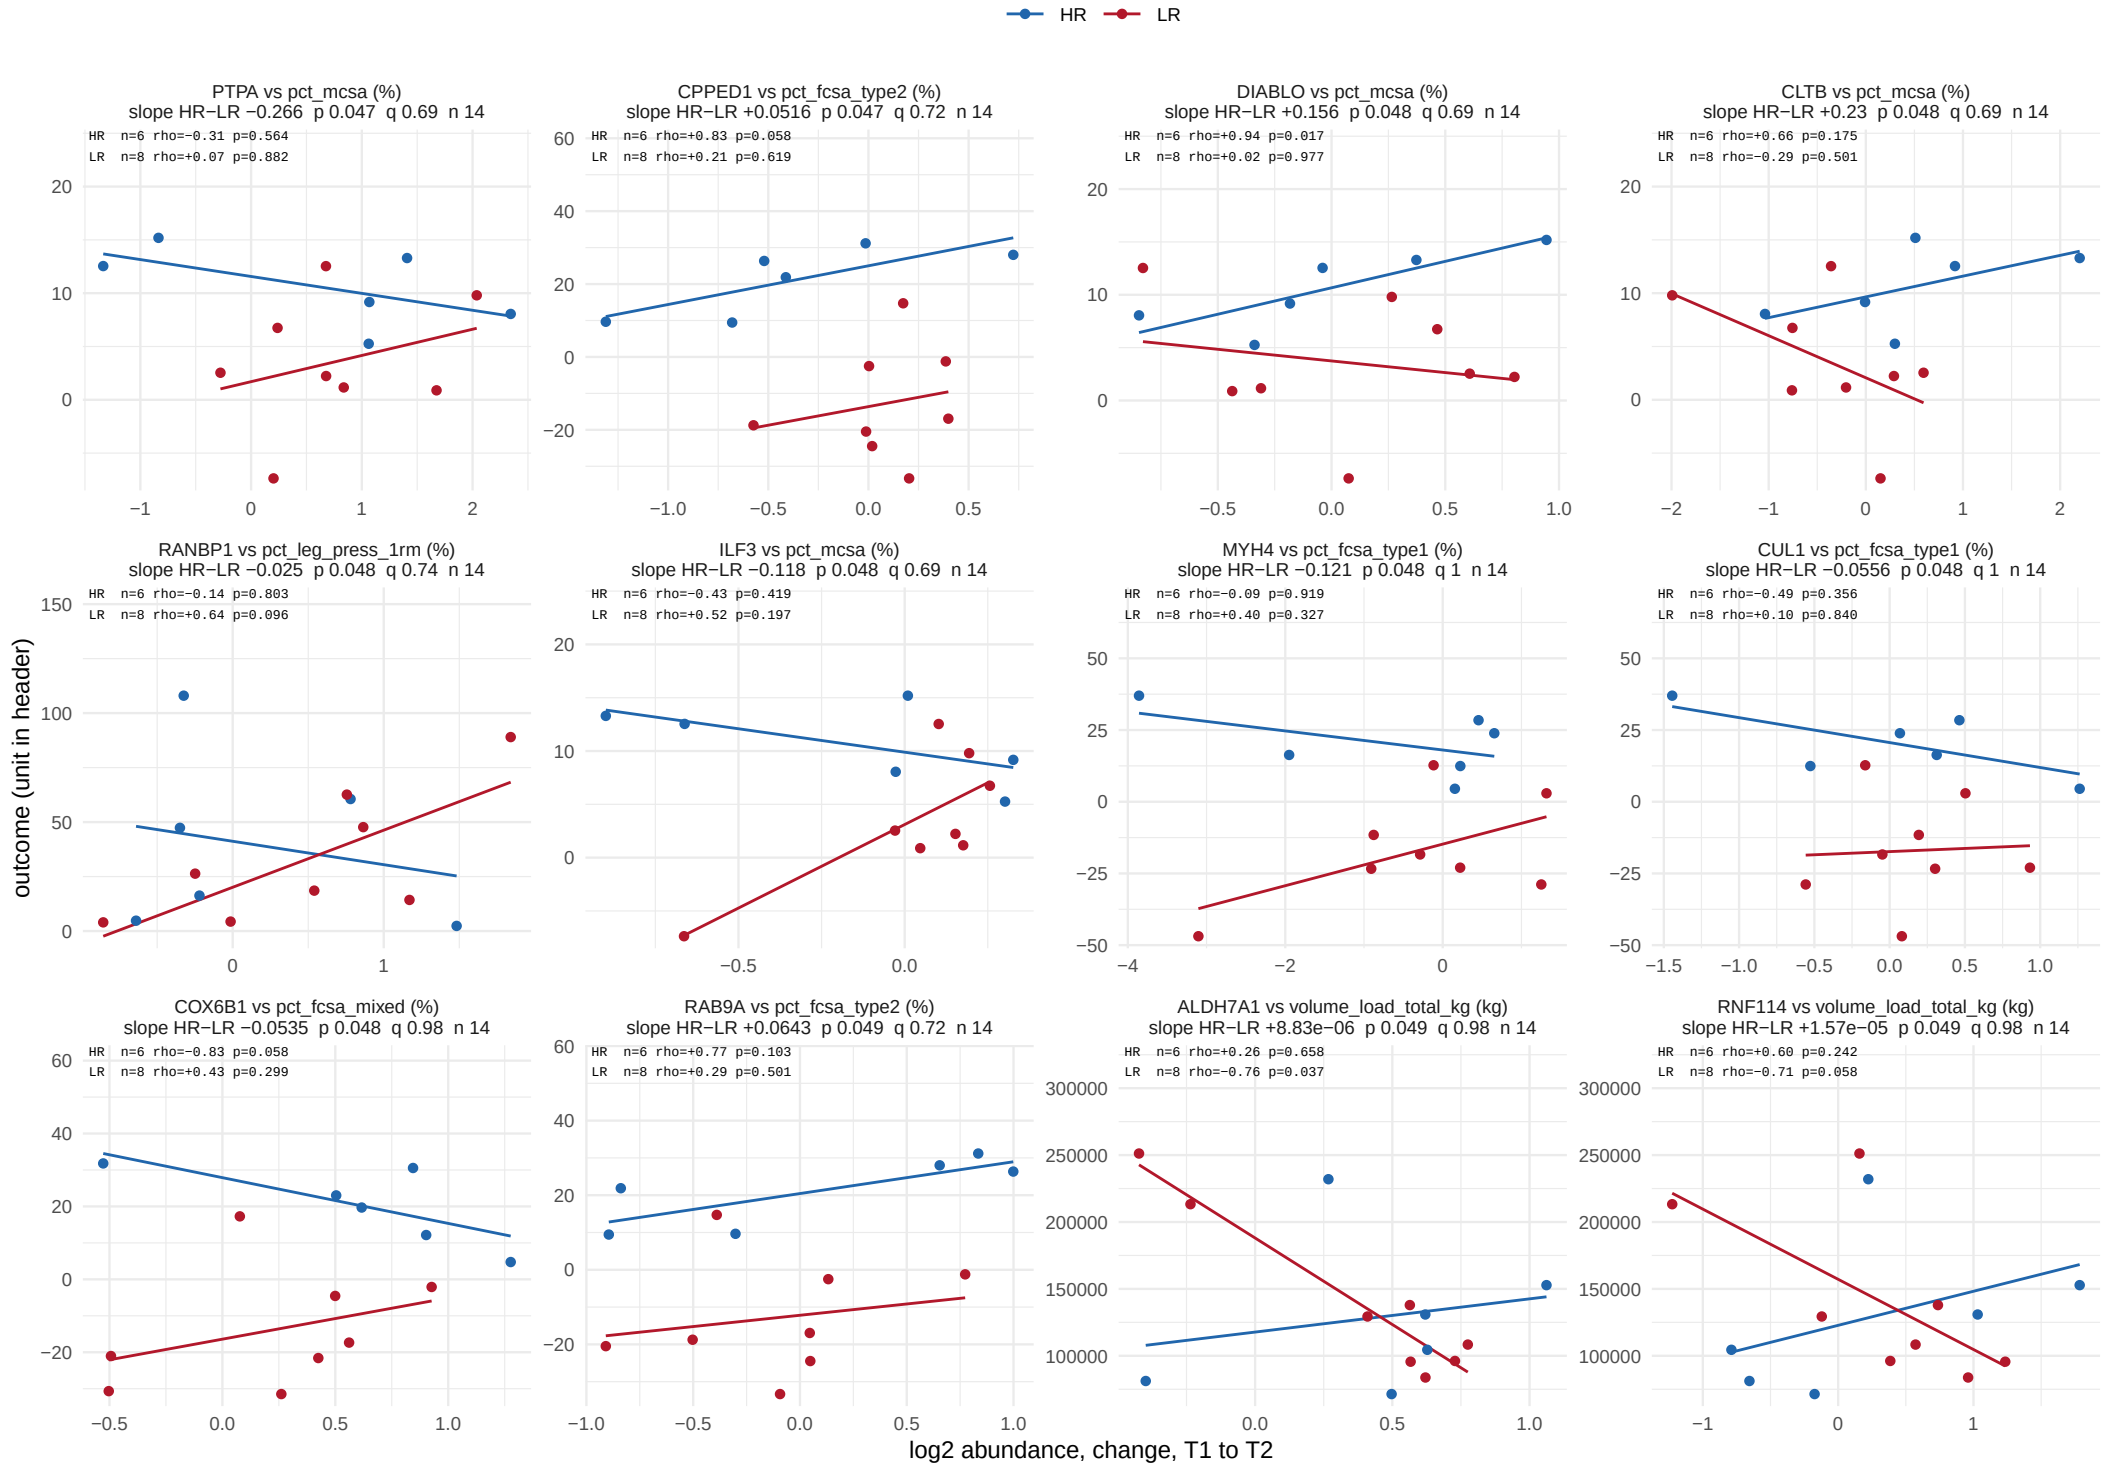

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


665 of 13300 feature−outcome pairs at p < 0.05, 11 at BH < 0.05. Page 55 of 56.

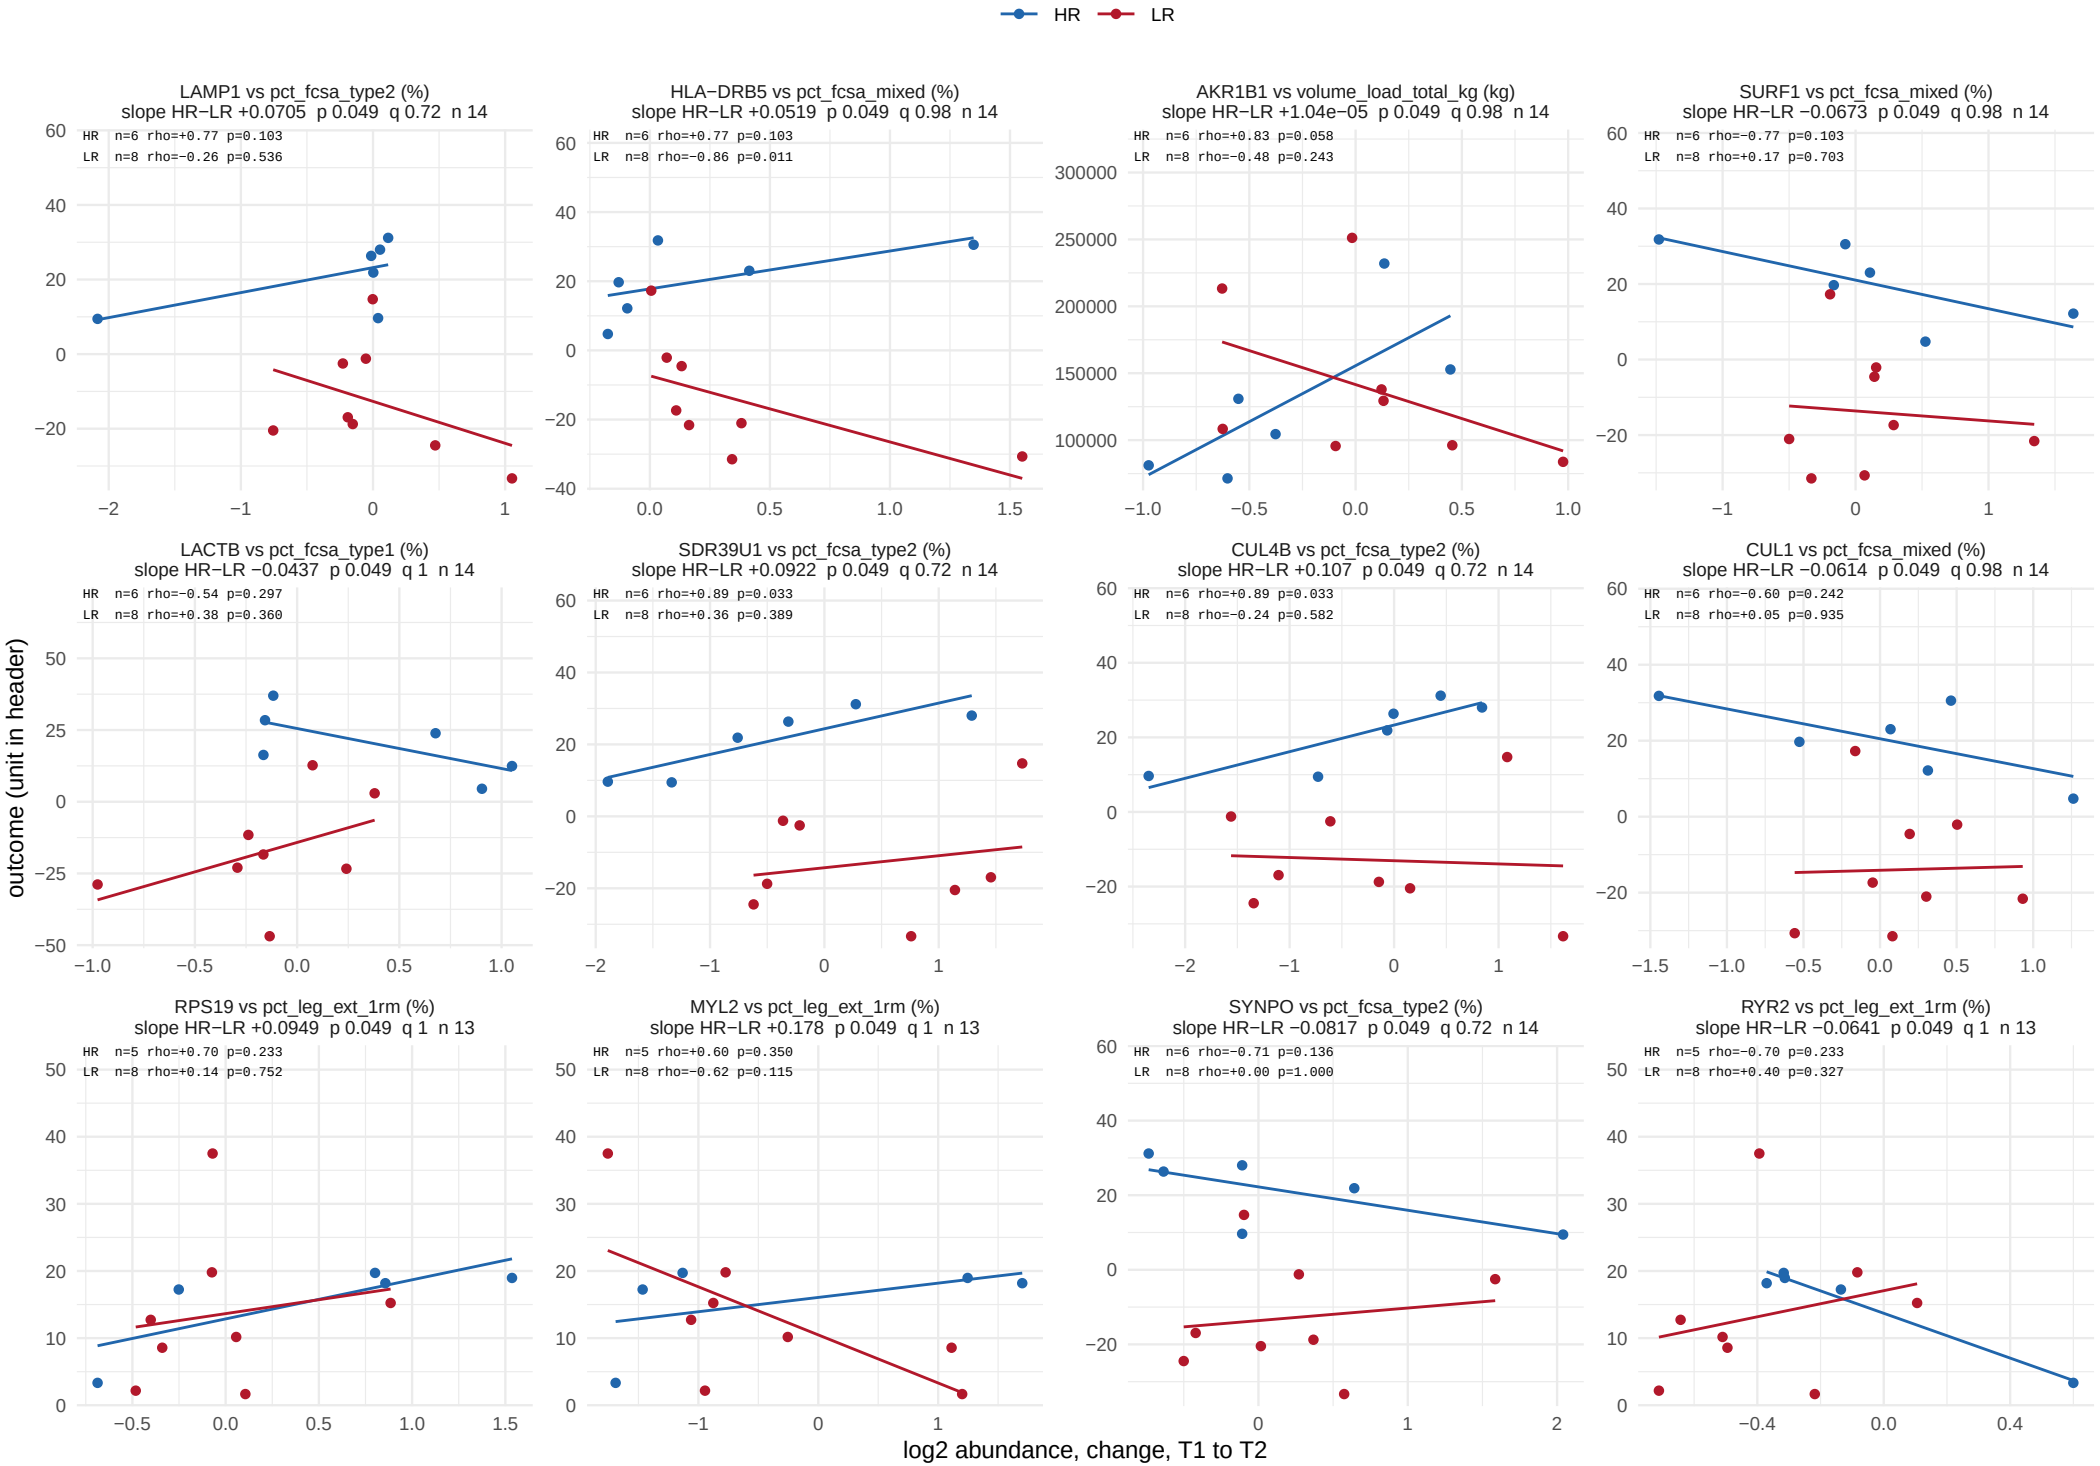

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


665 of 13300 feature−outcome pairs at p < 0.05, 11 at BH < 0.05. Page 56 of 56.

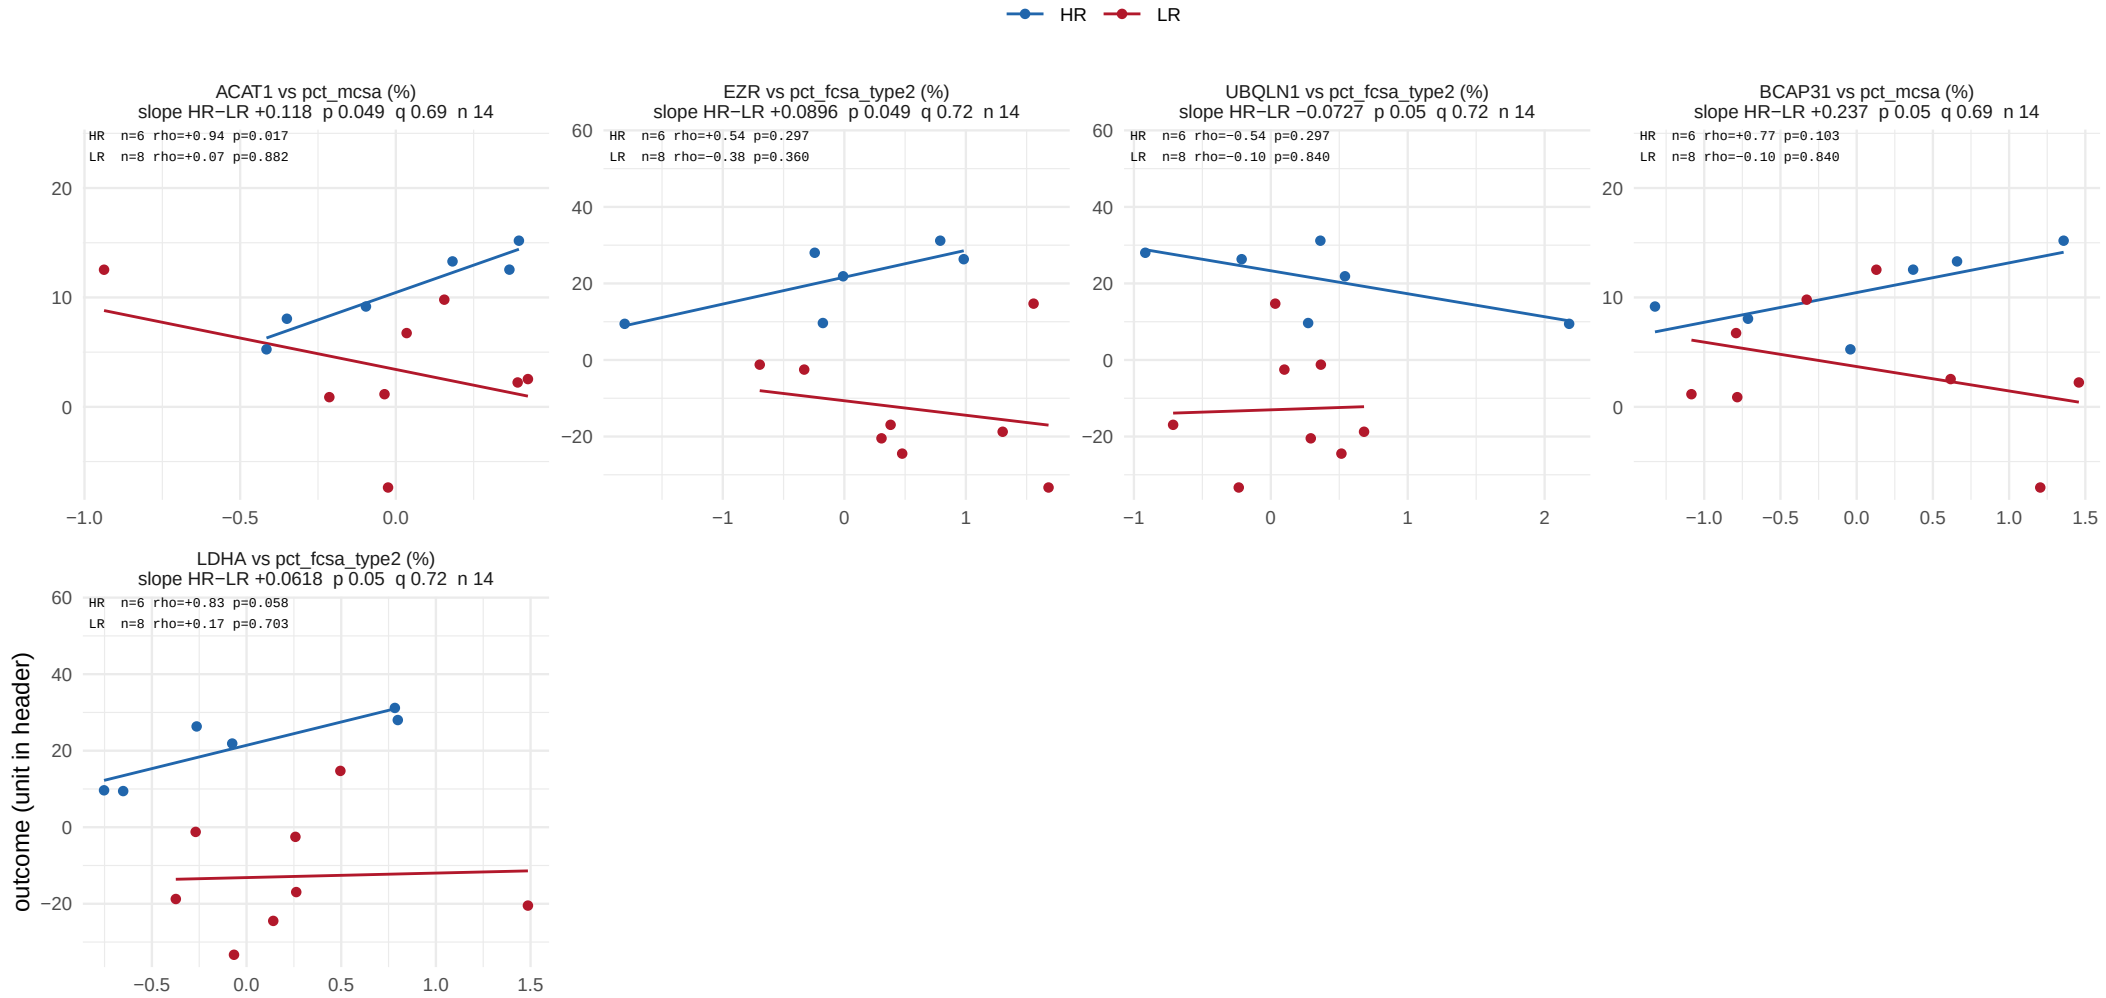

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


565 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 1 of 48.

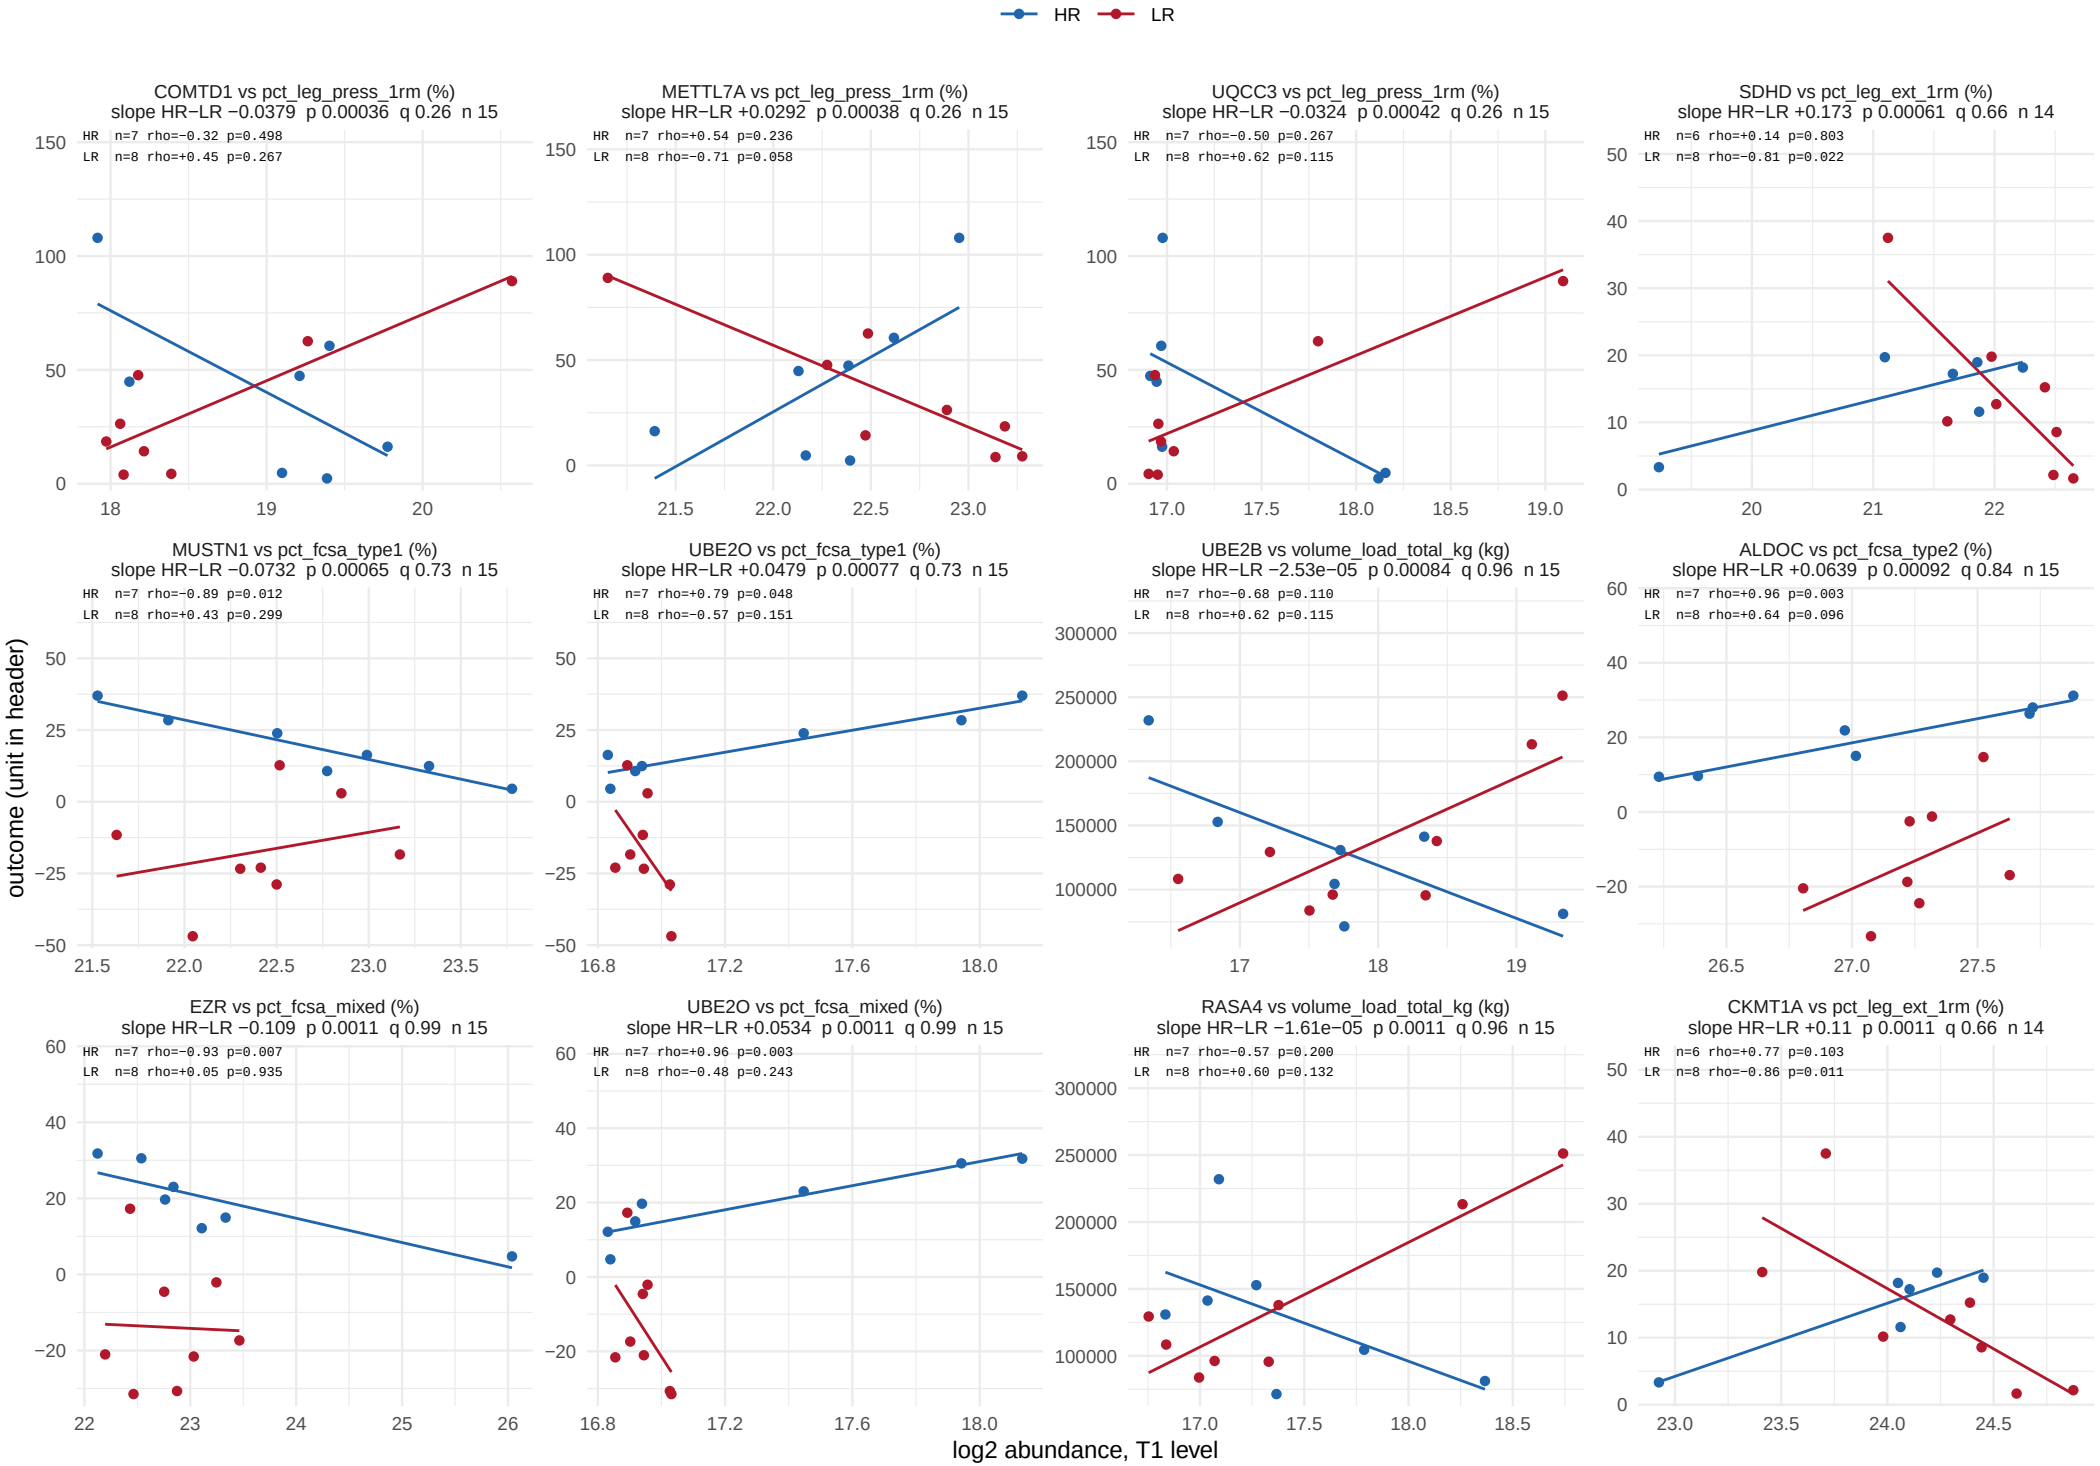

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


565 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 2 of 48.

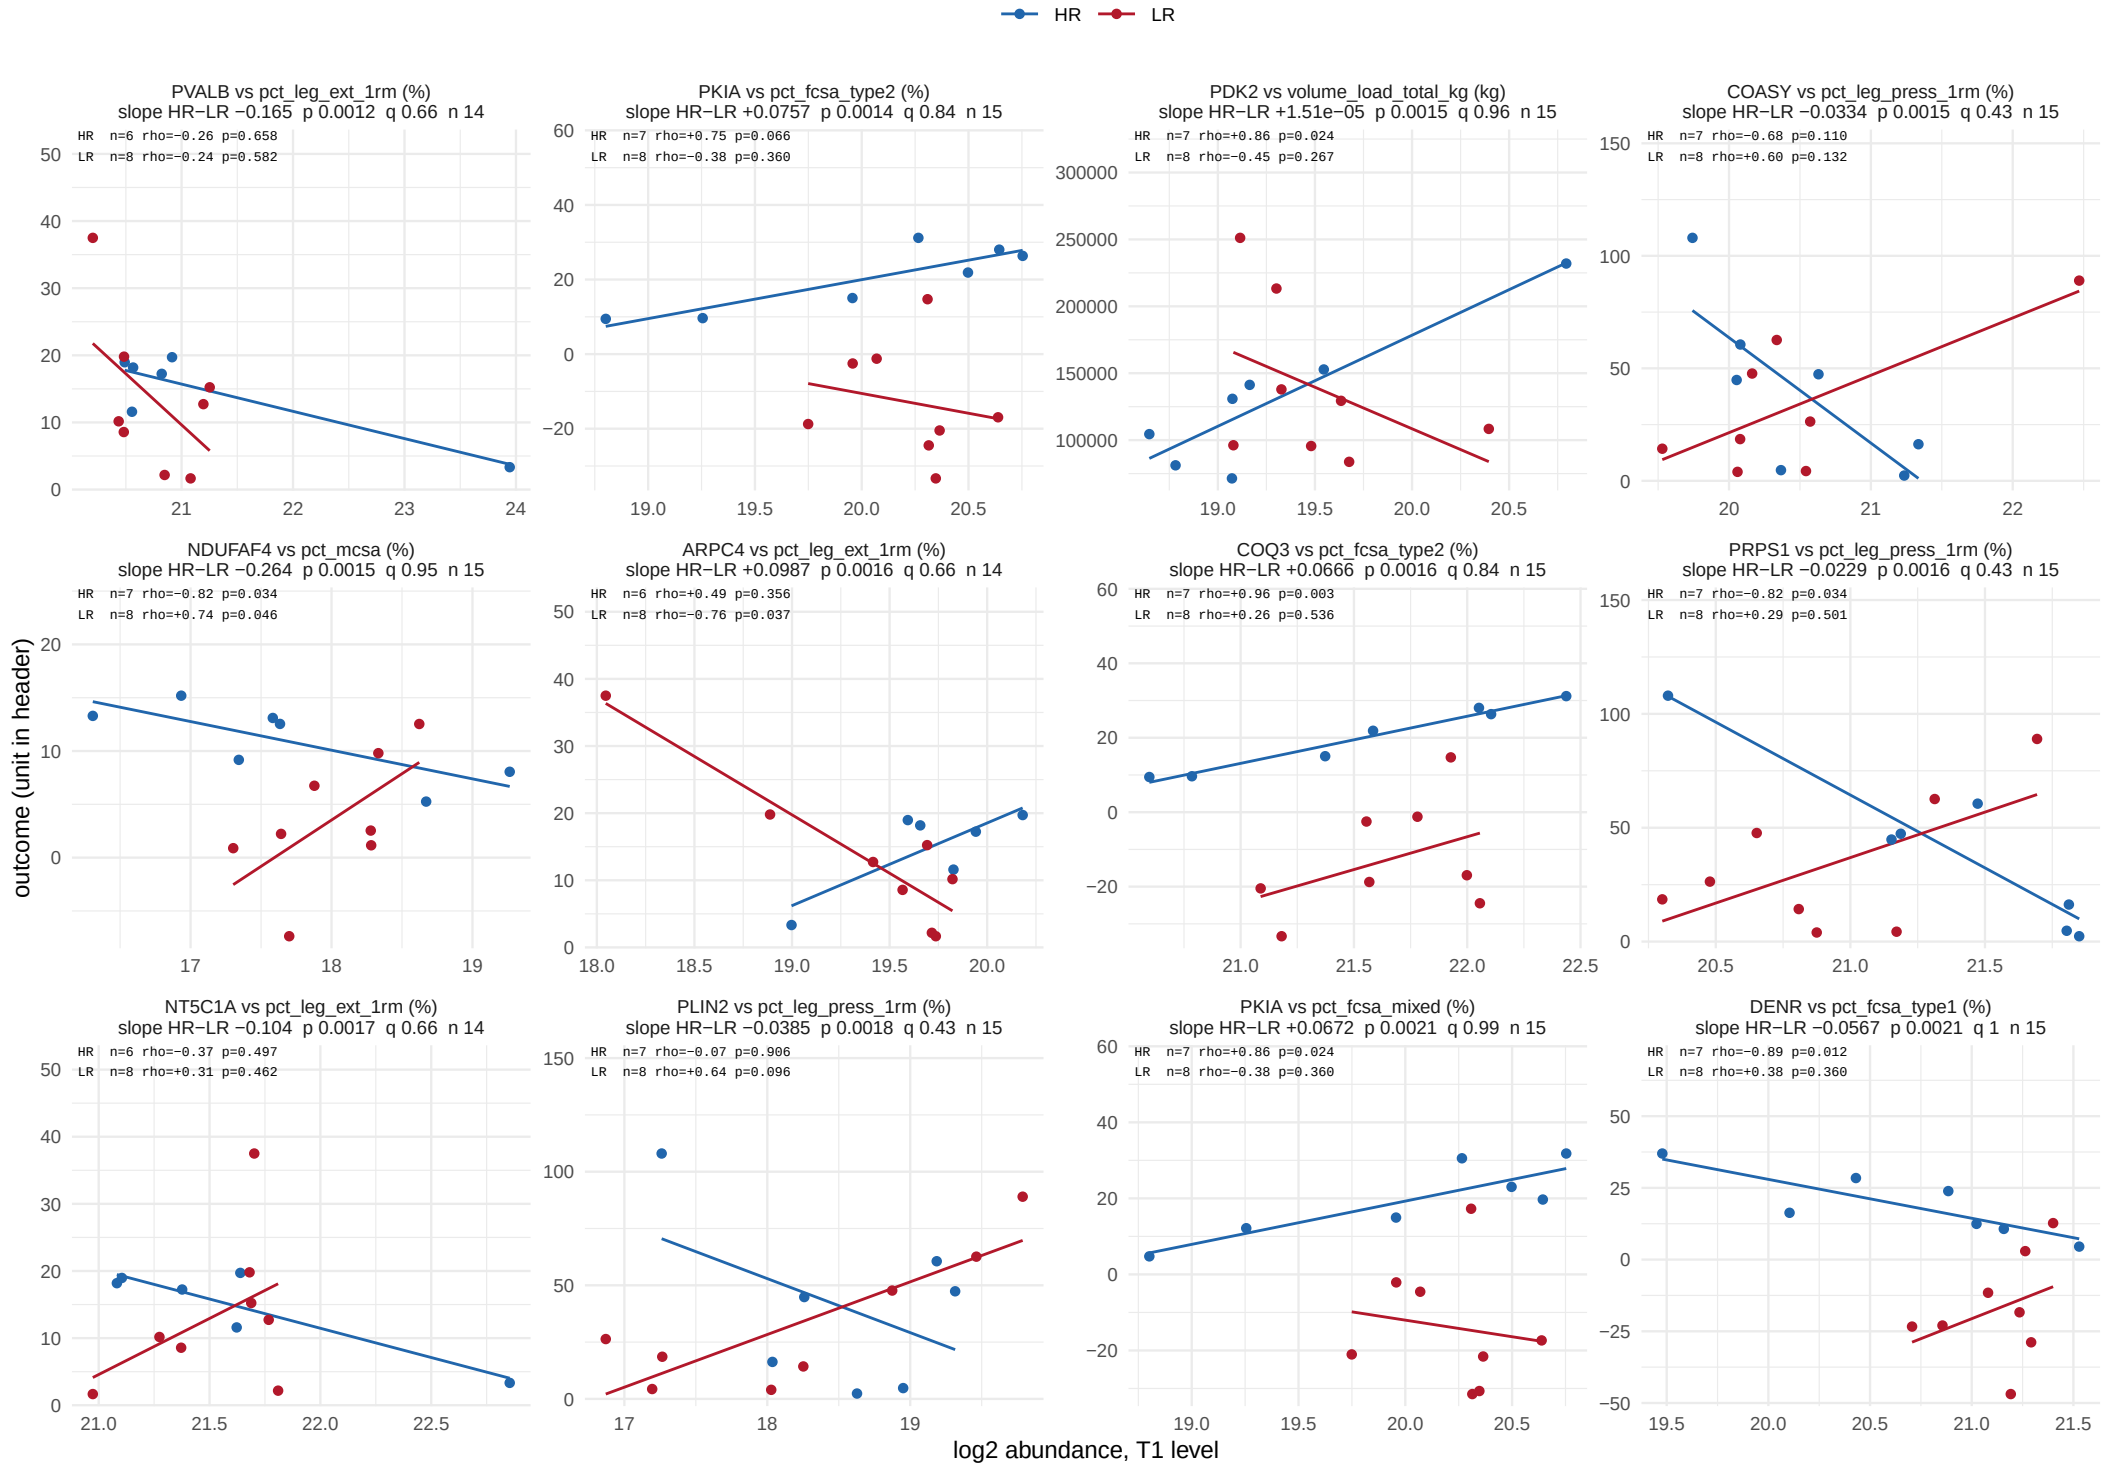

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


565 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 3 of 48.

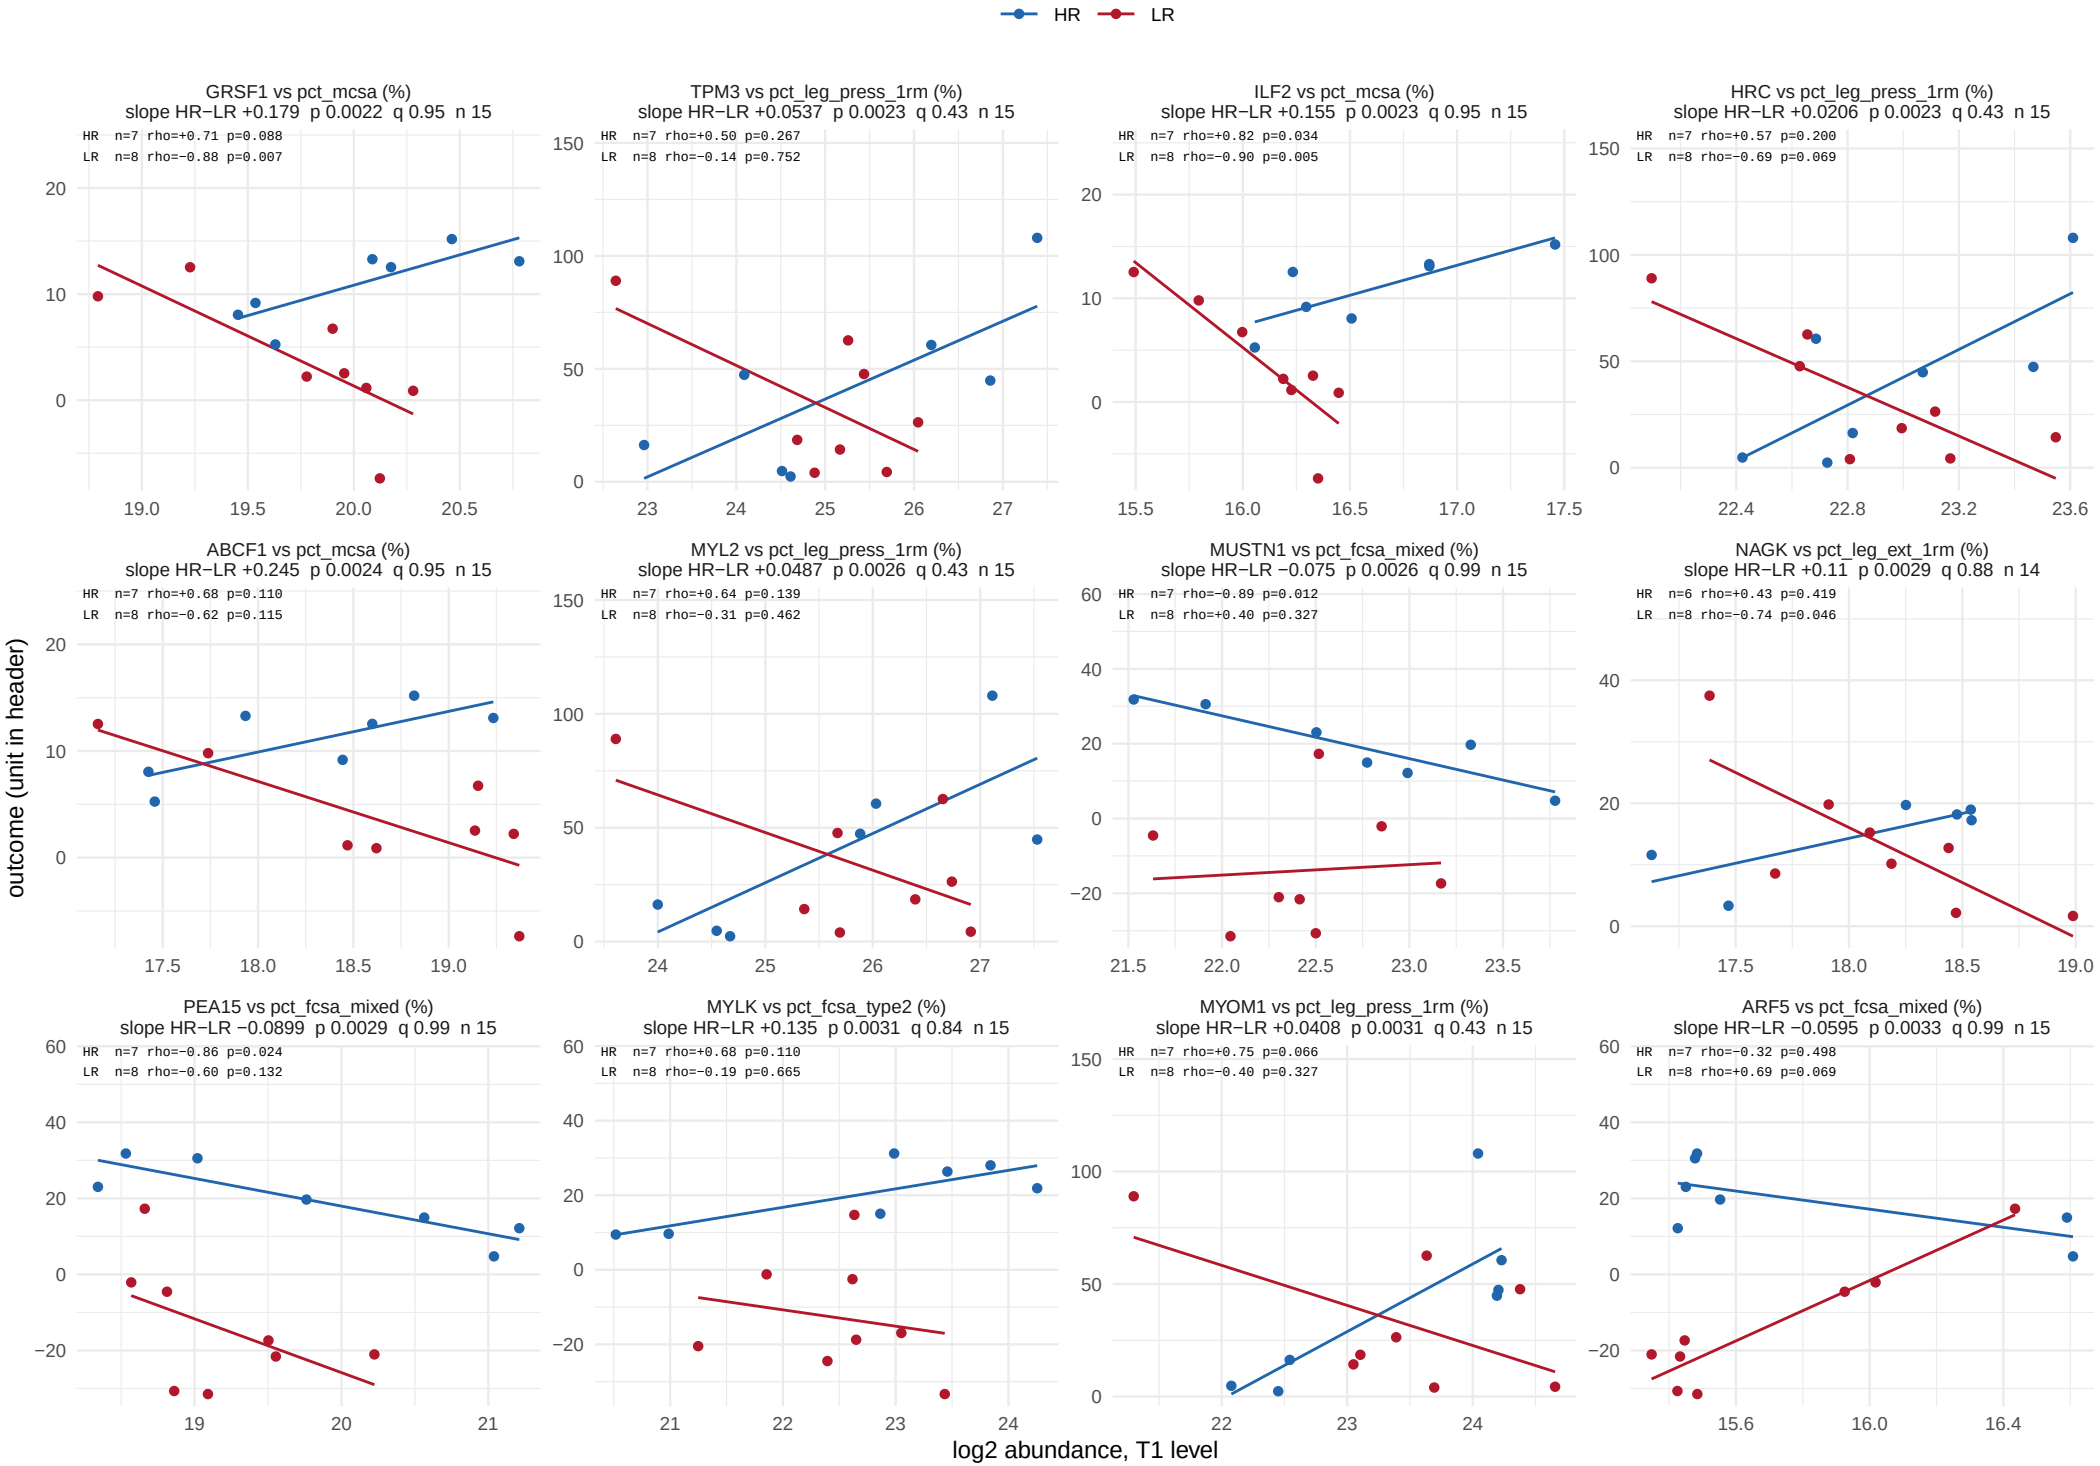

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


565 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 4 of 48.

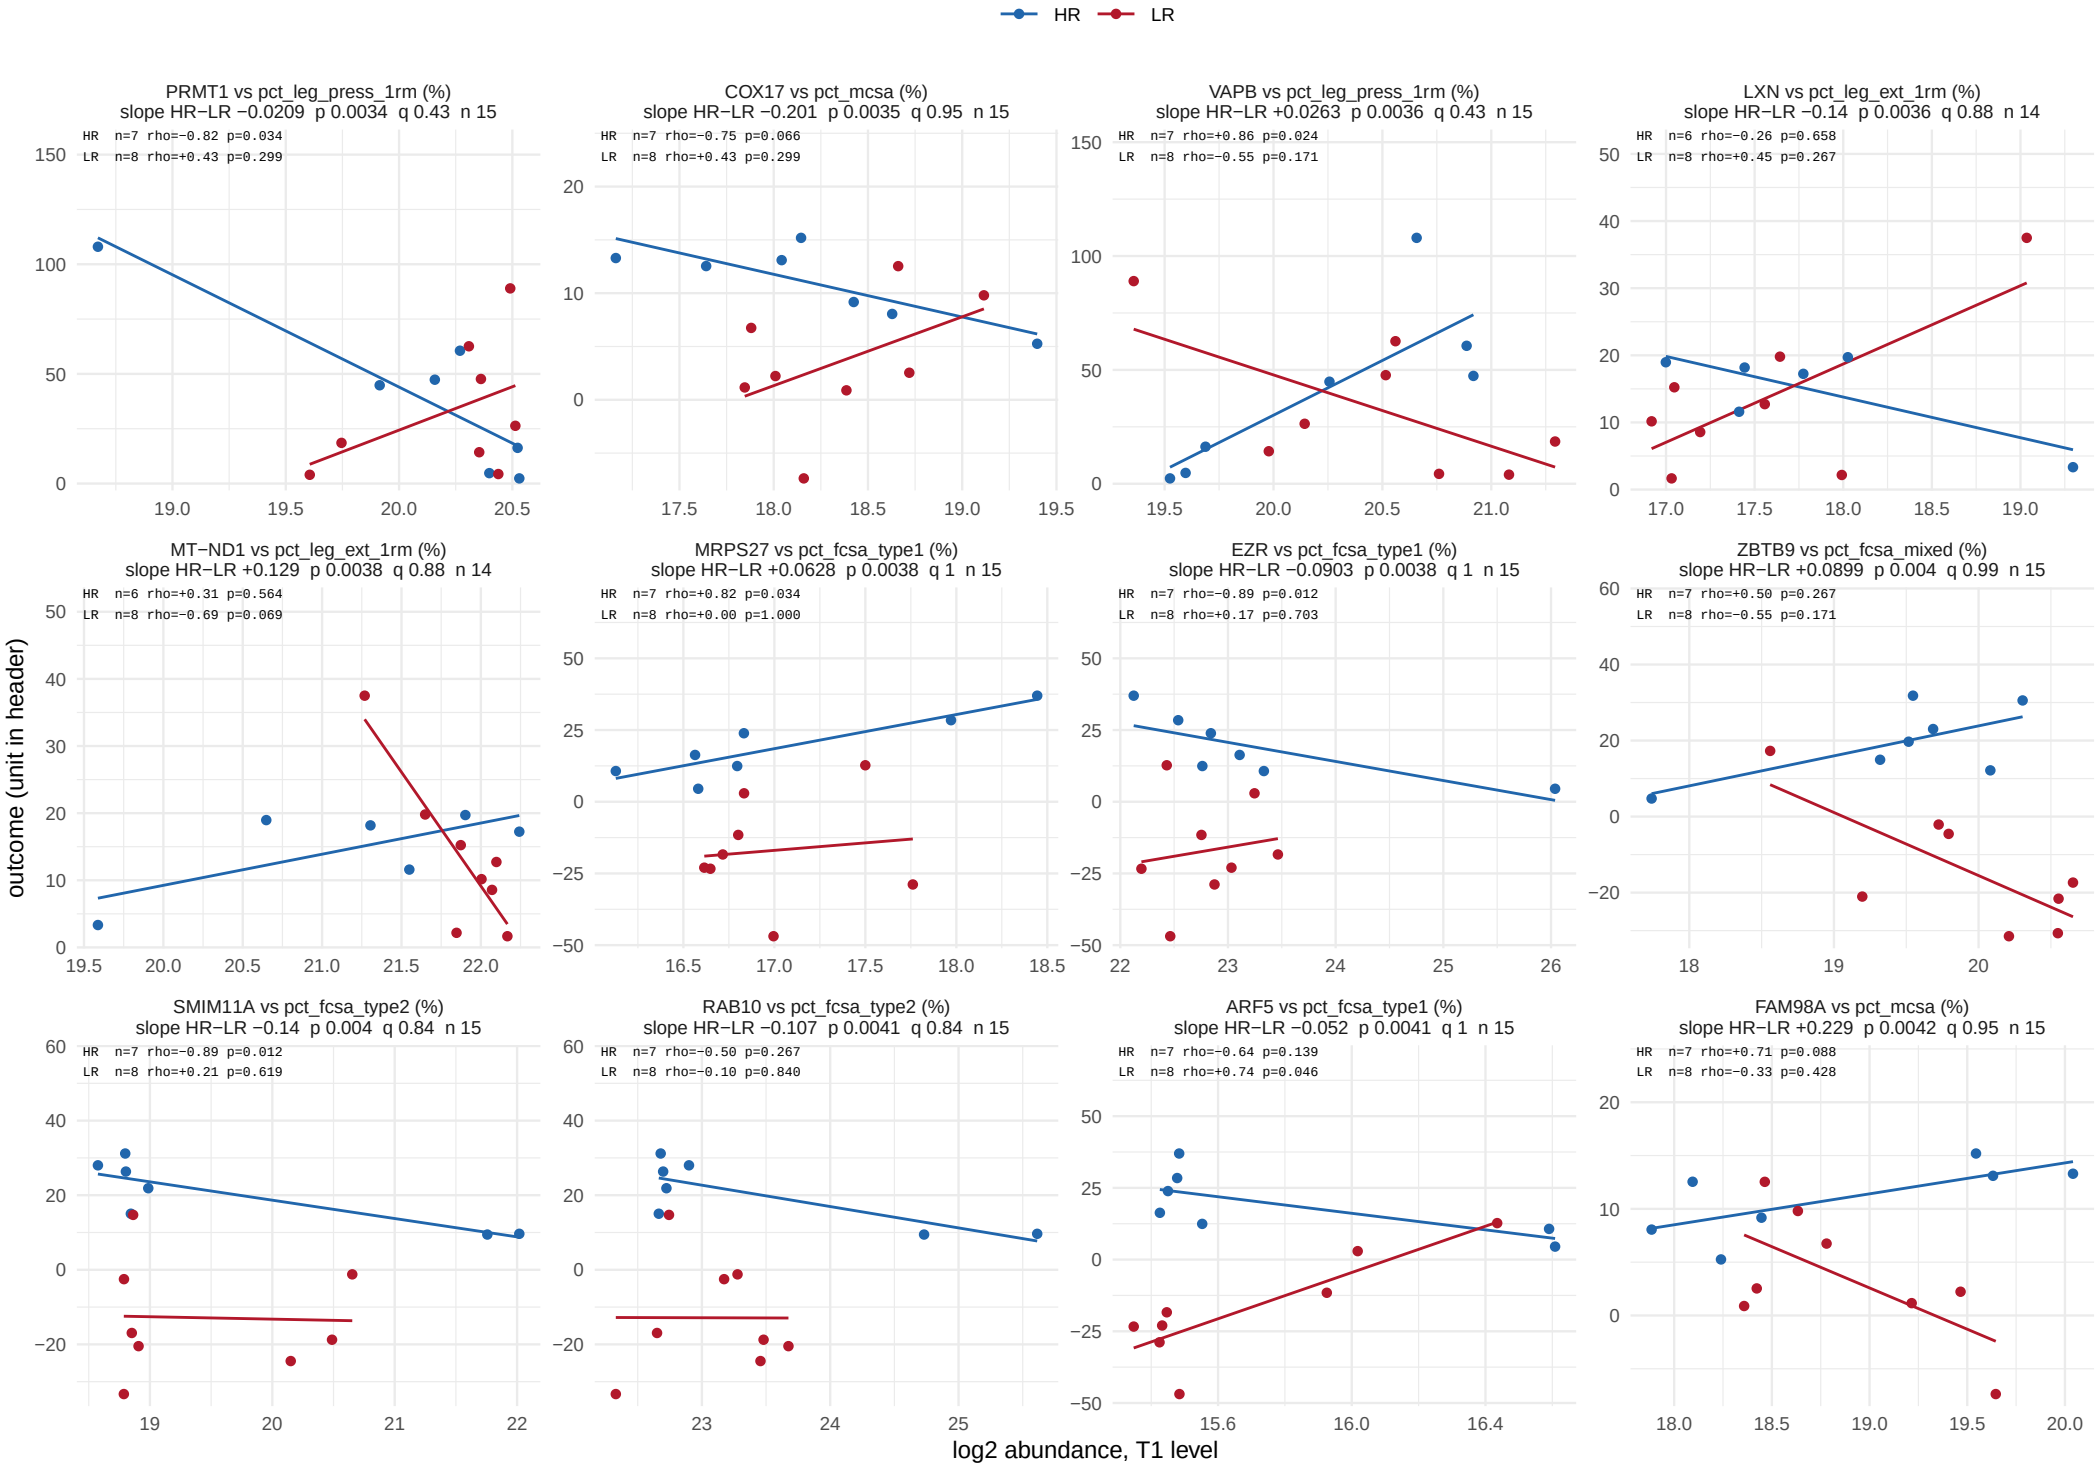

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


565 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 5 of 48.

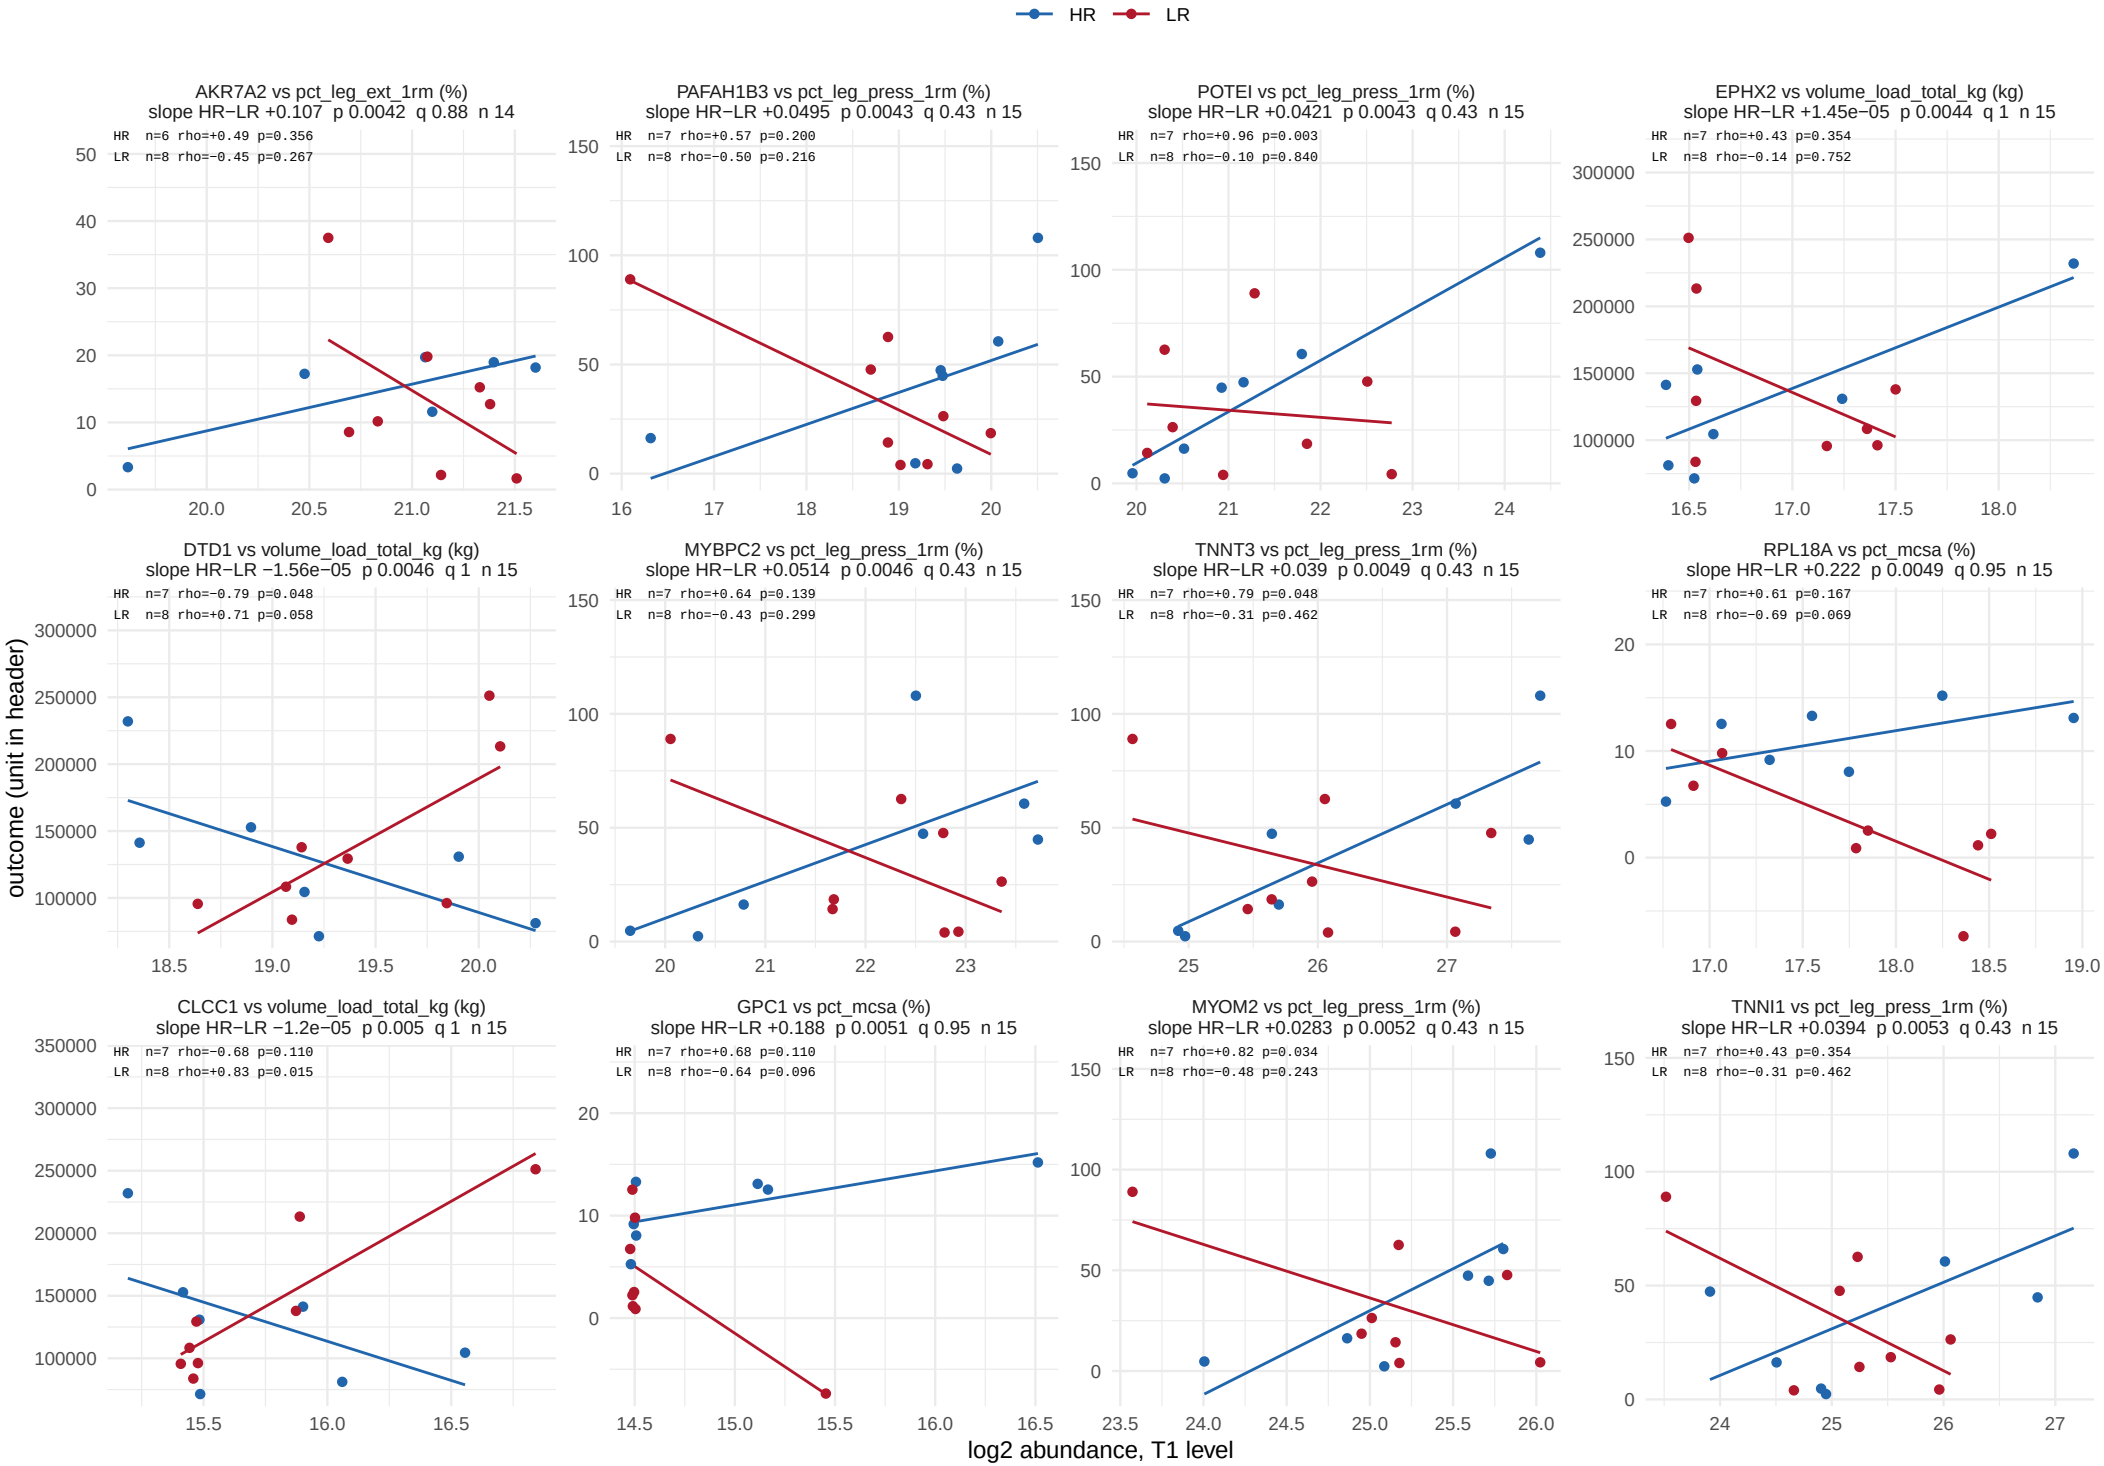

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


565 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 6 of 48.

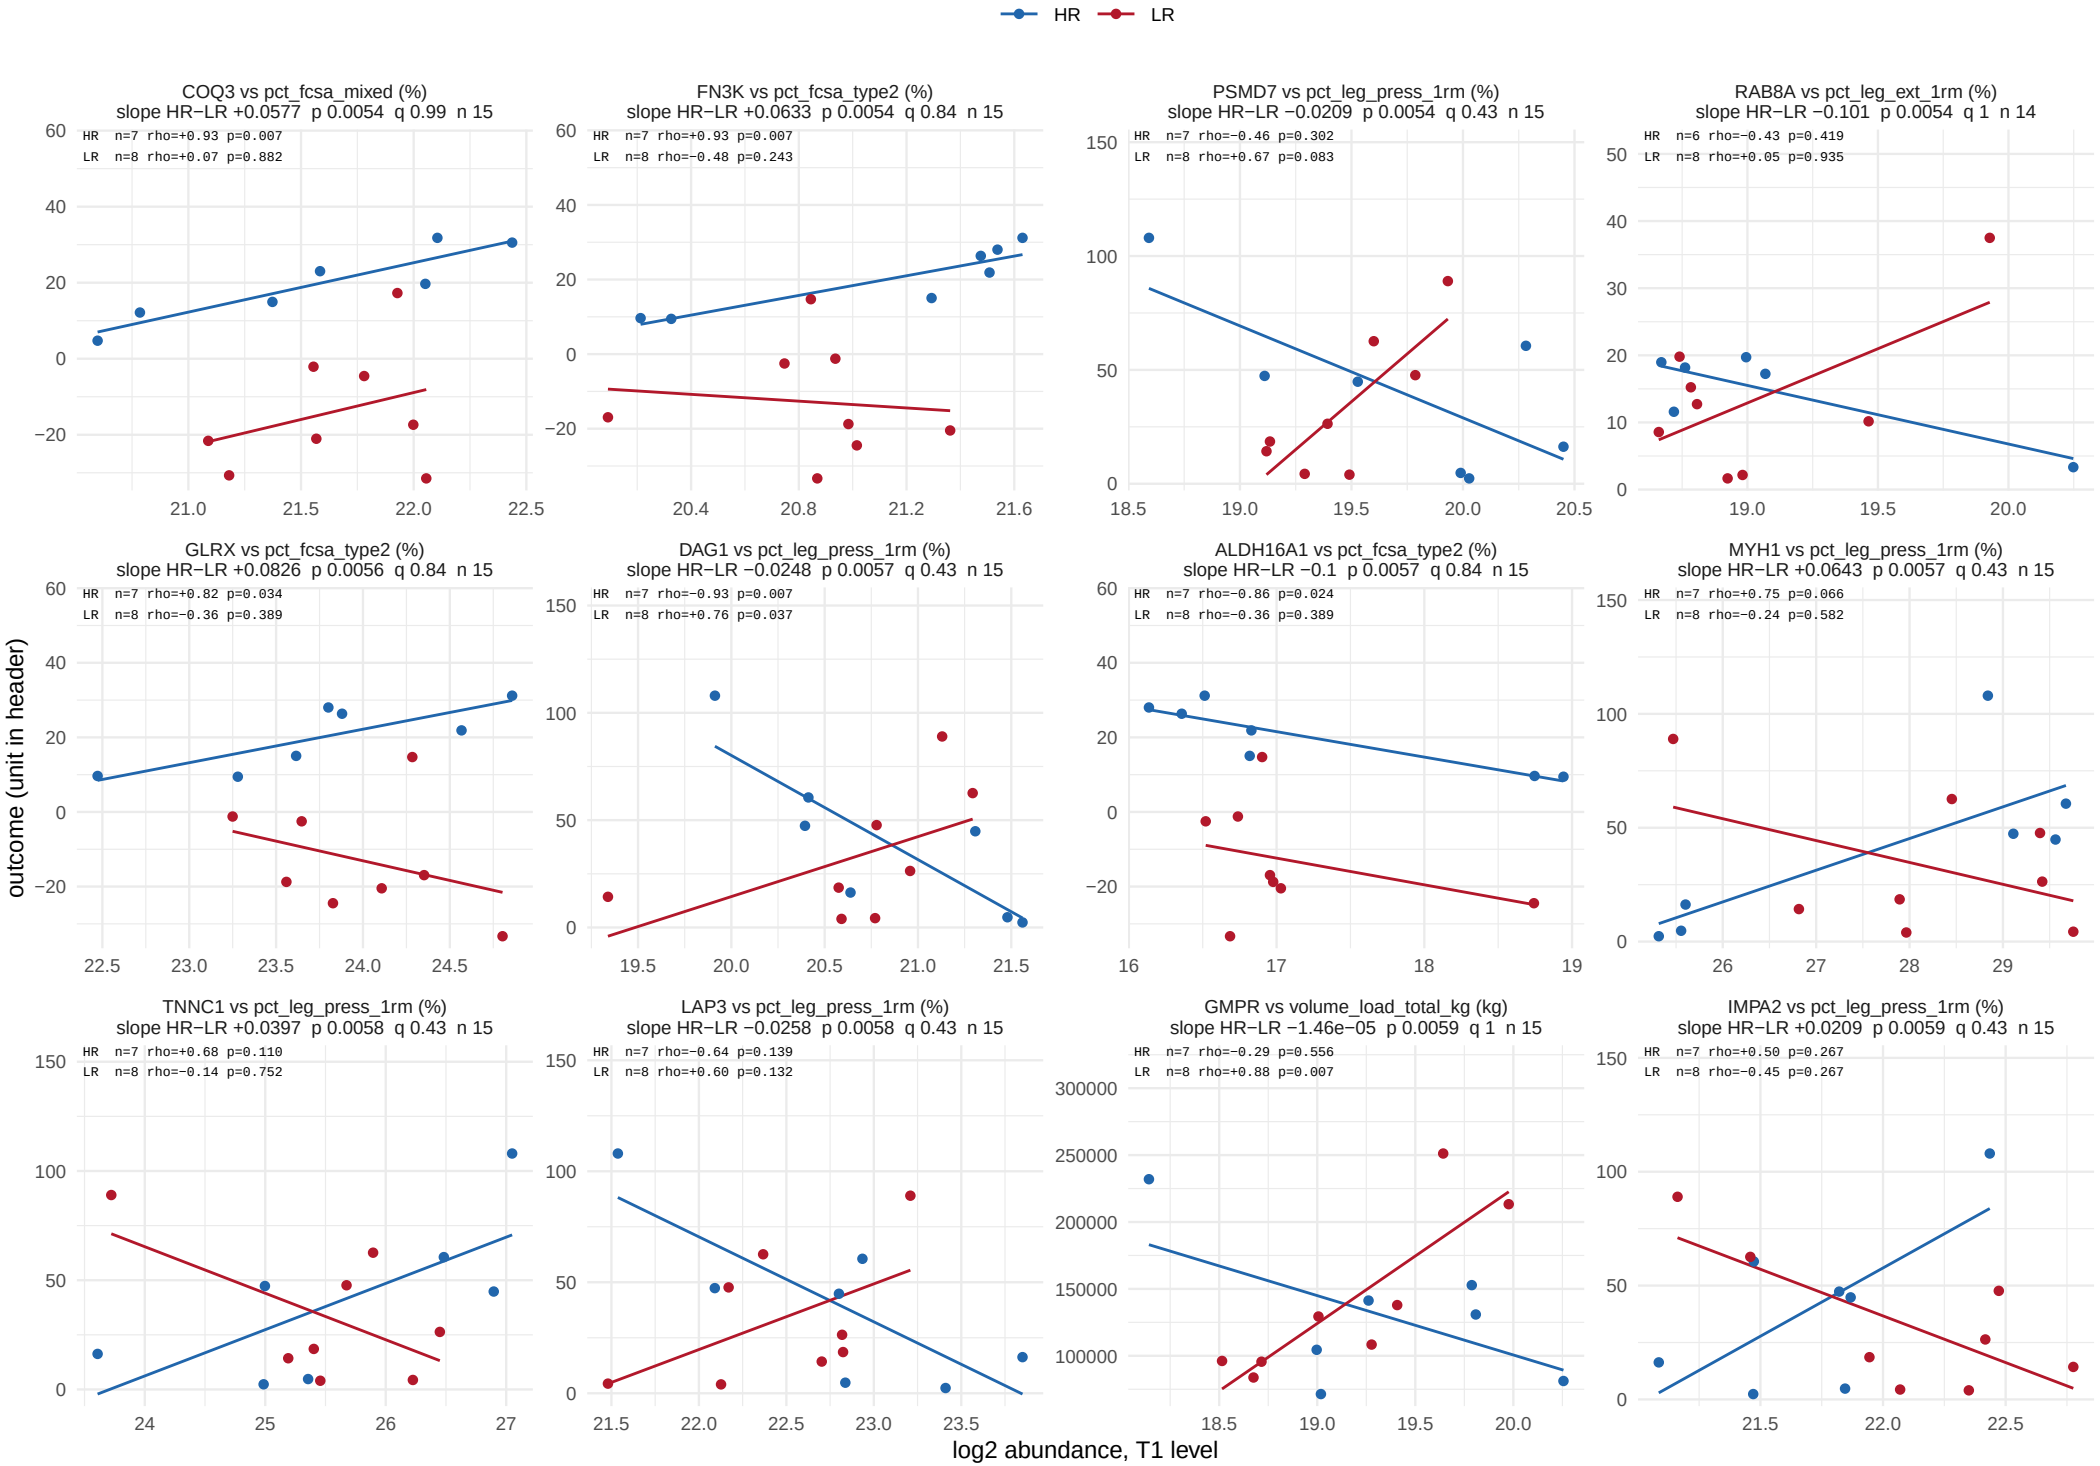

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


565 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 7 of 48.

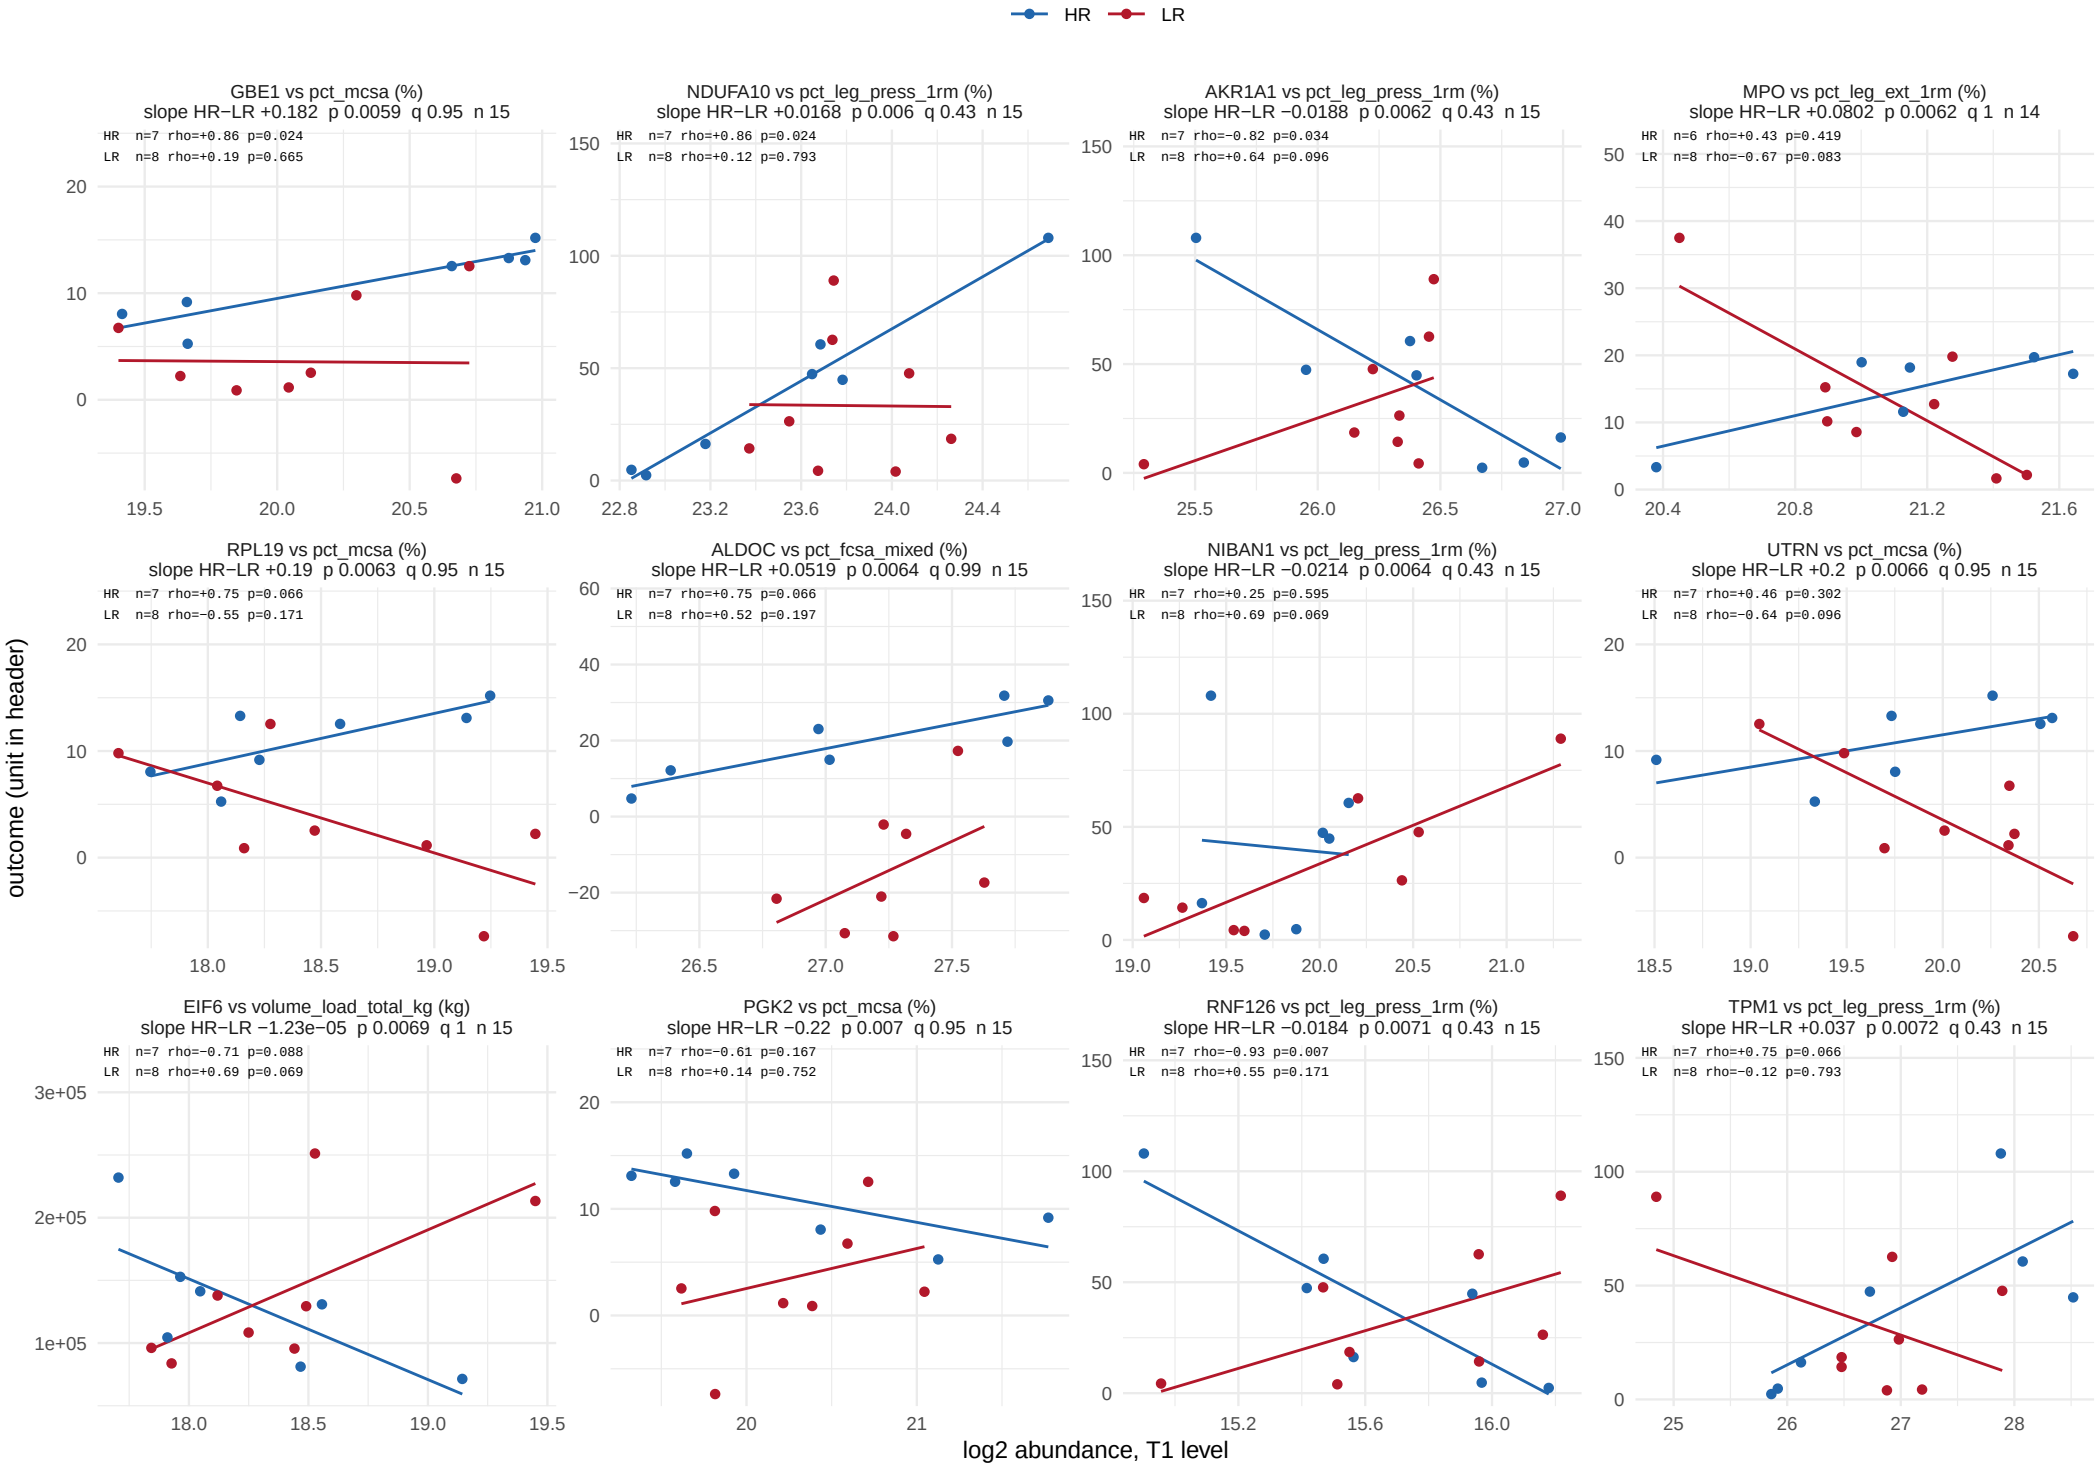

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


565 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 8 of 48.

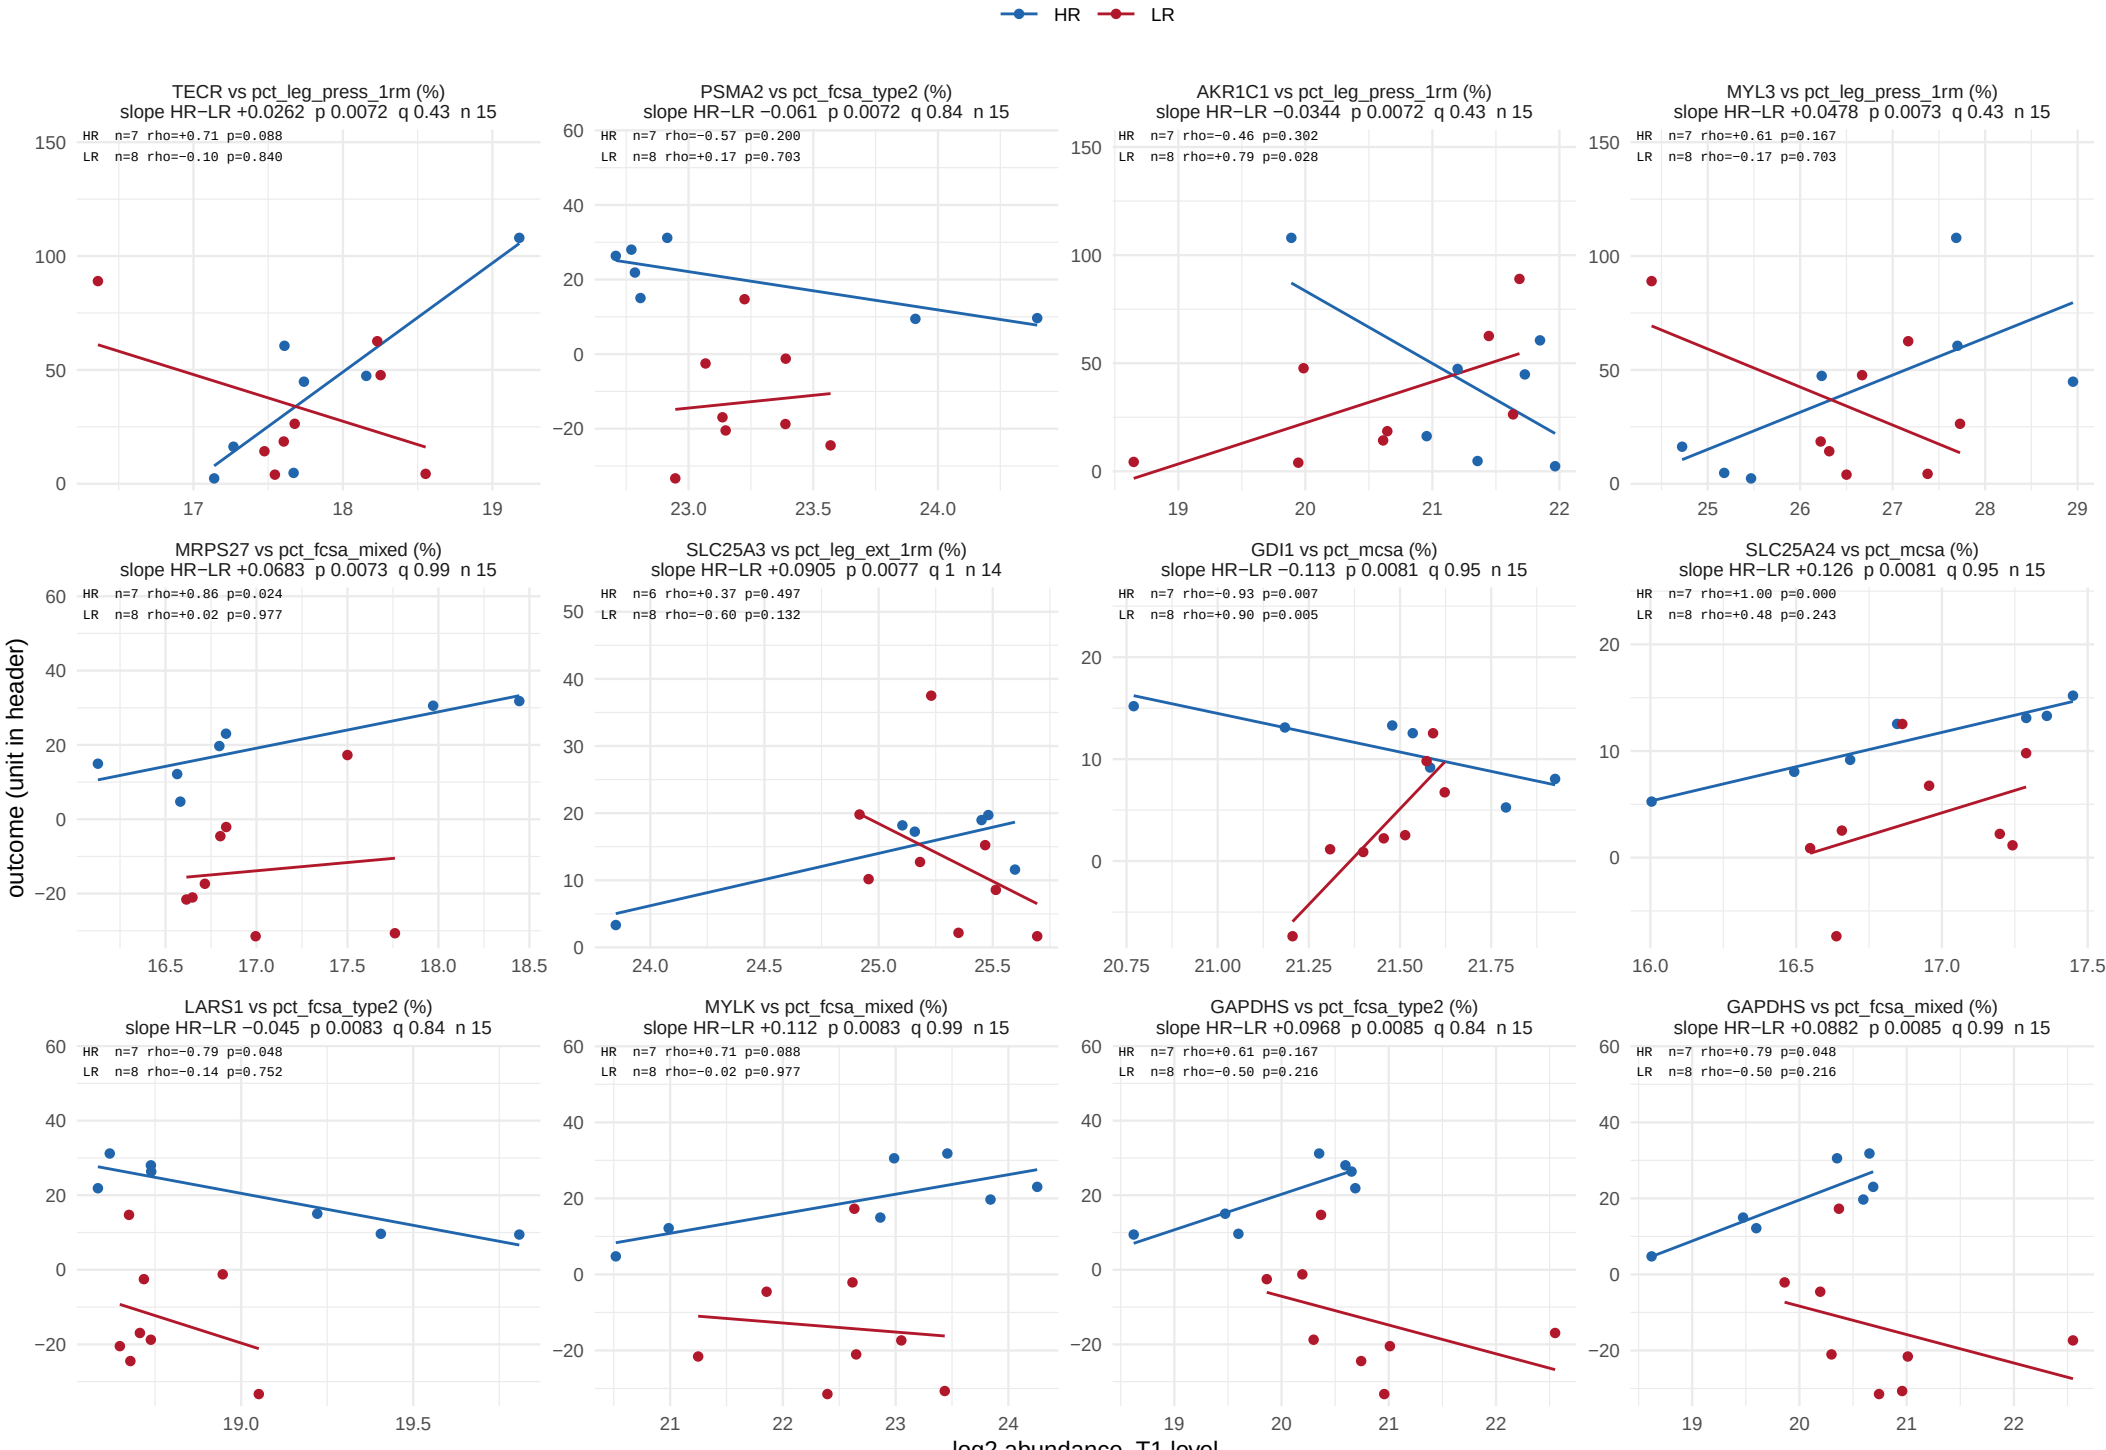

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


565 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 9 of 48.

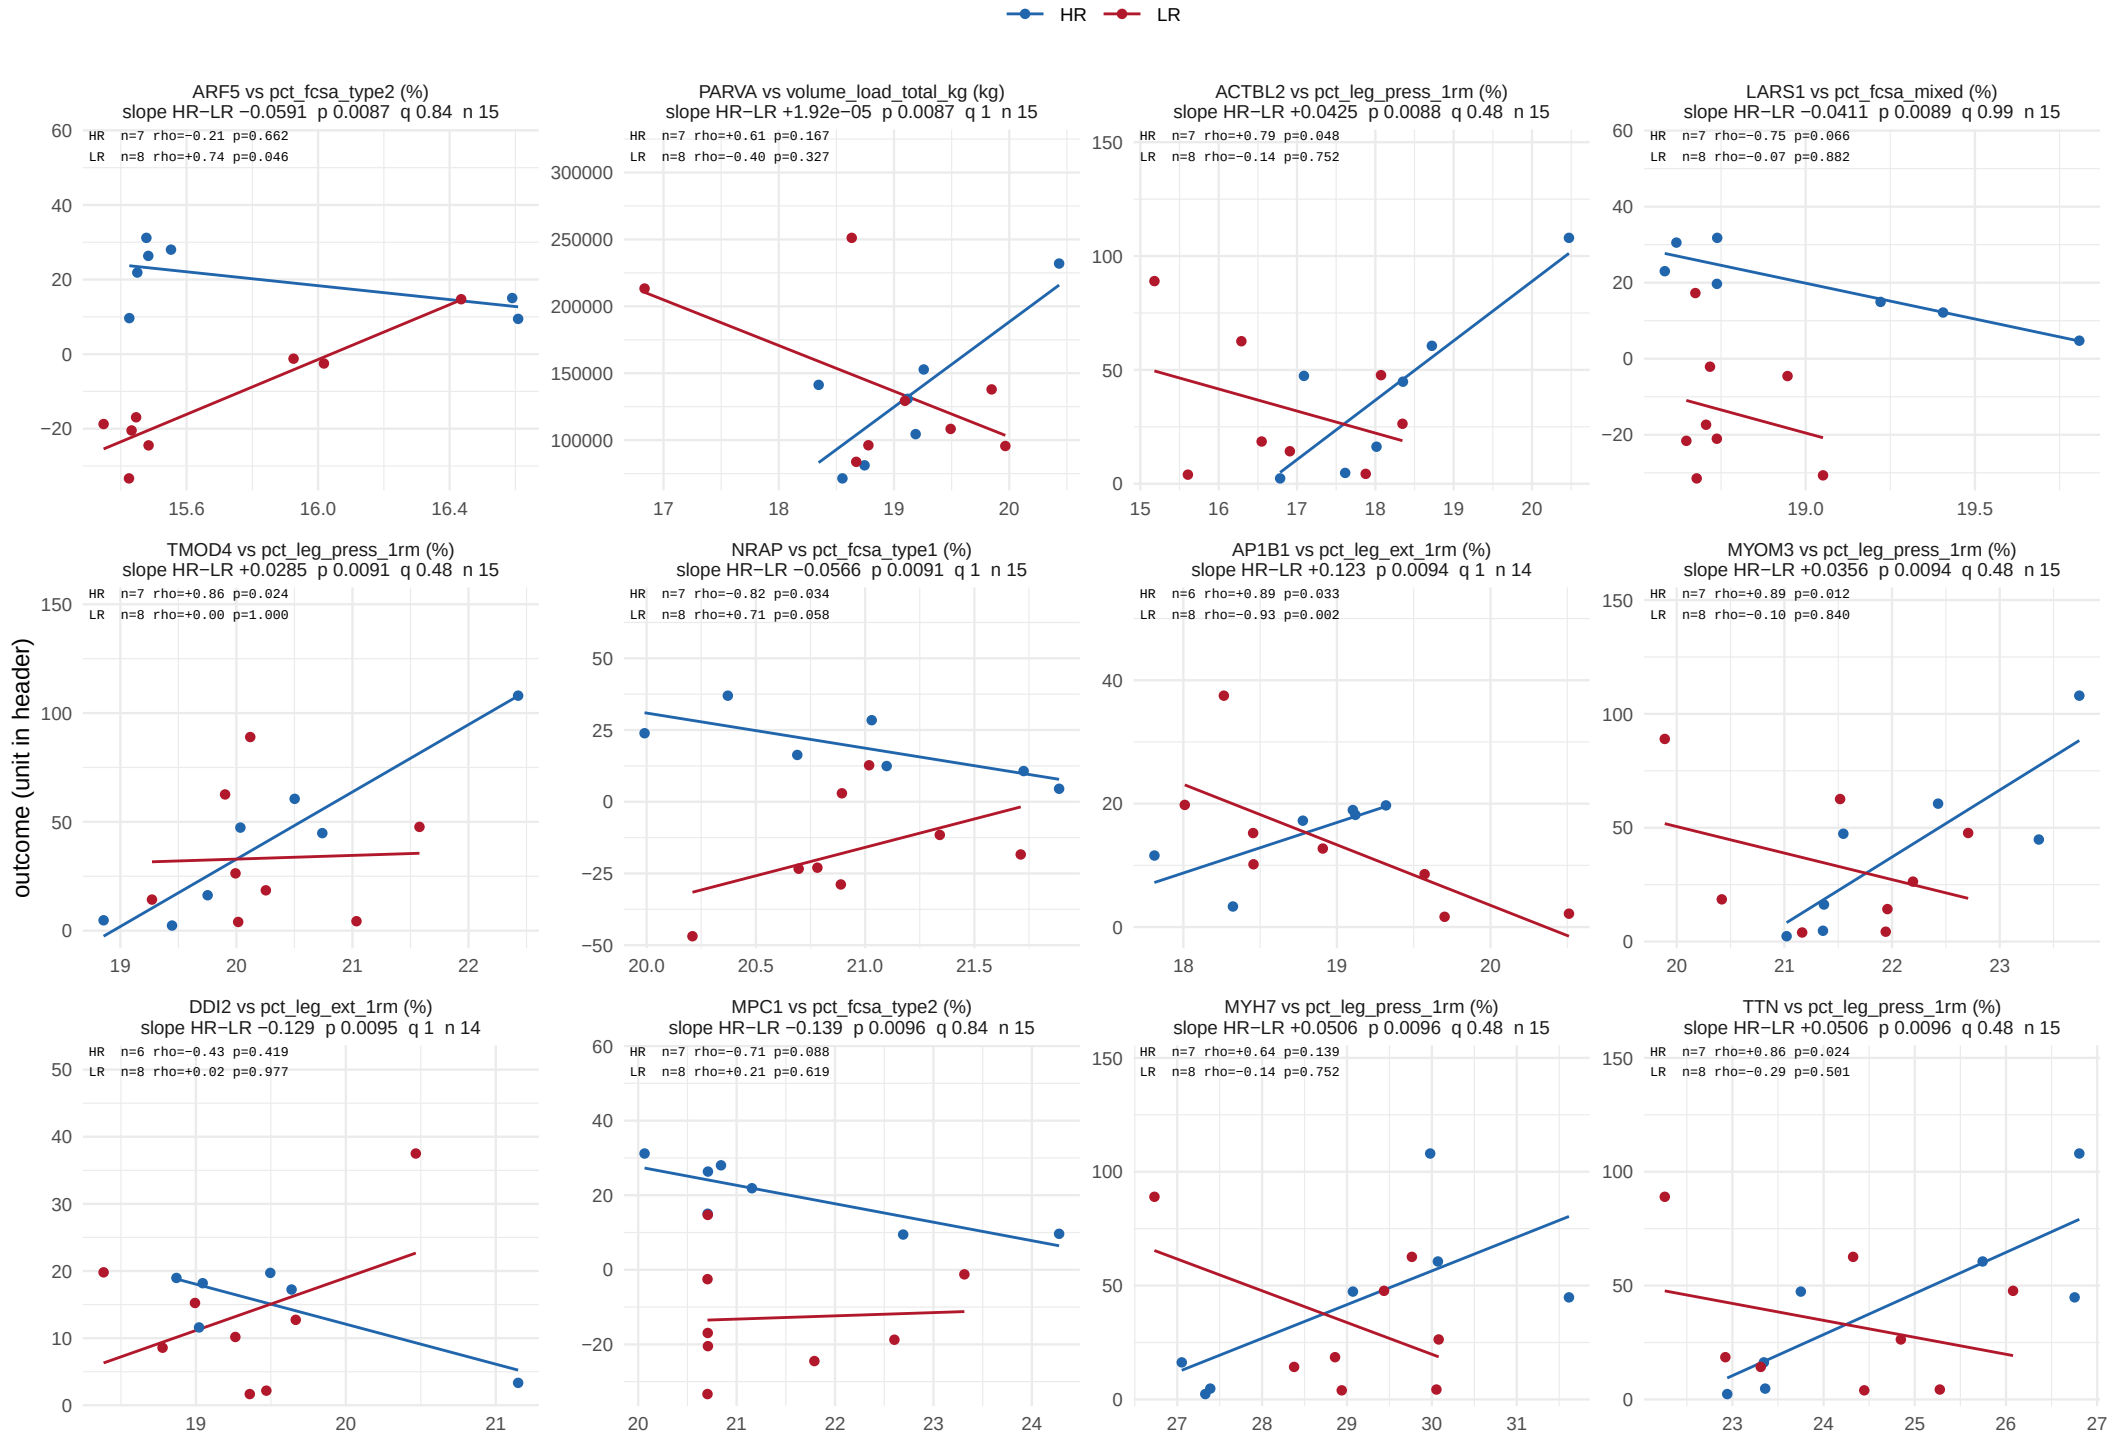

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


565 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 10 of 48.

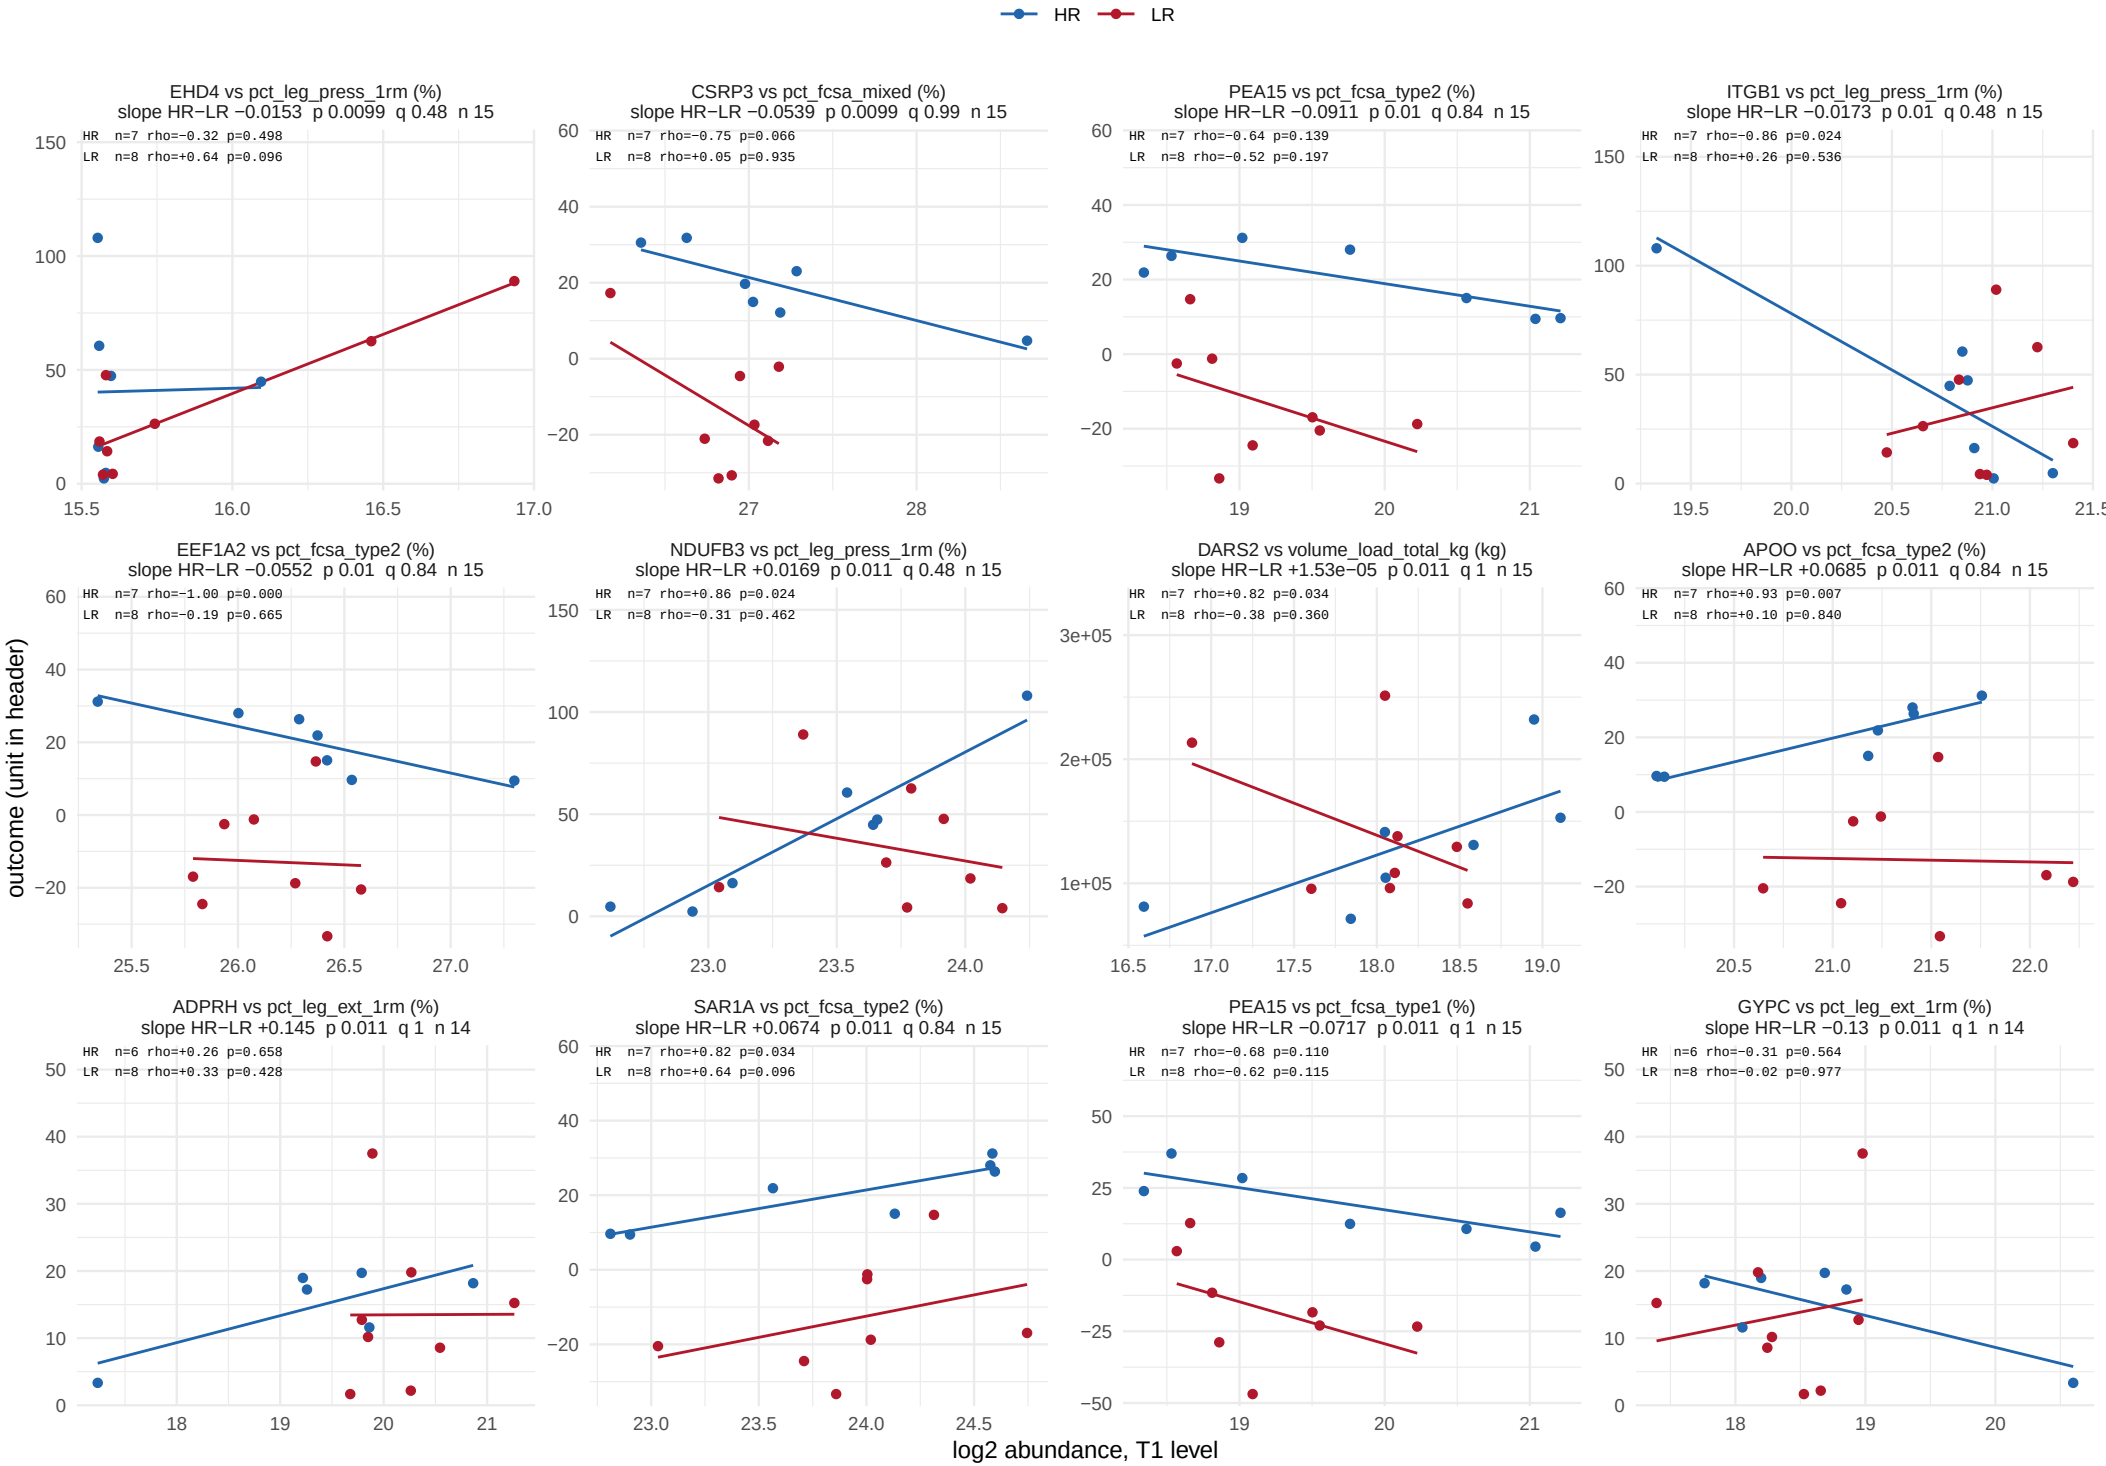

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


565 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 11 of 48.

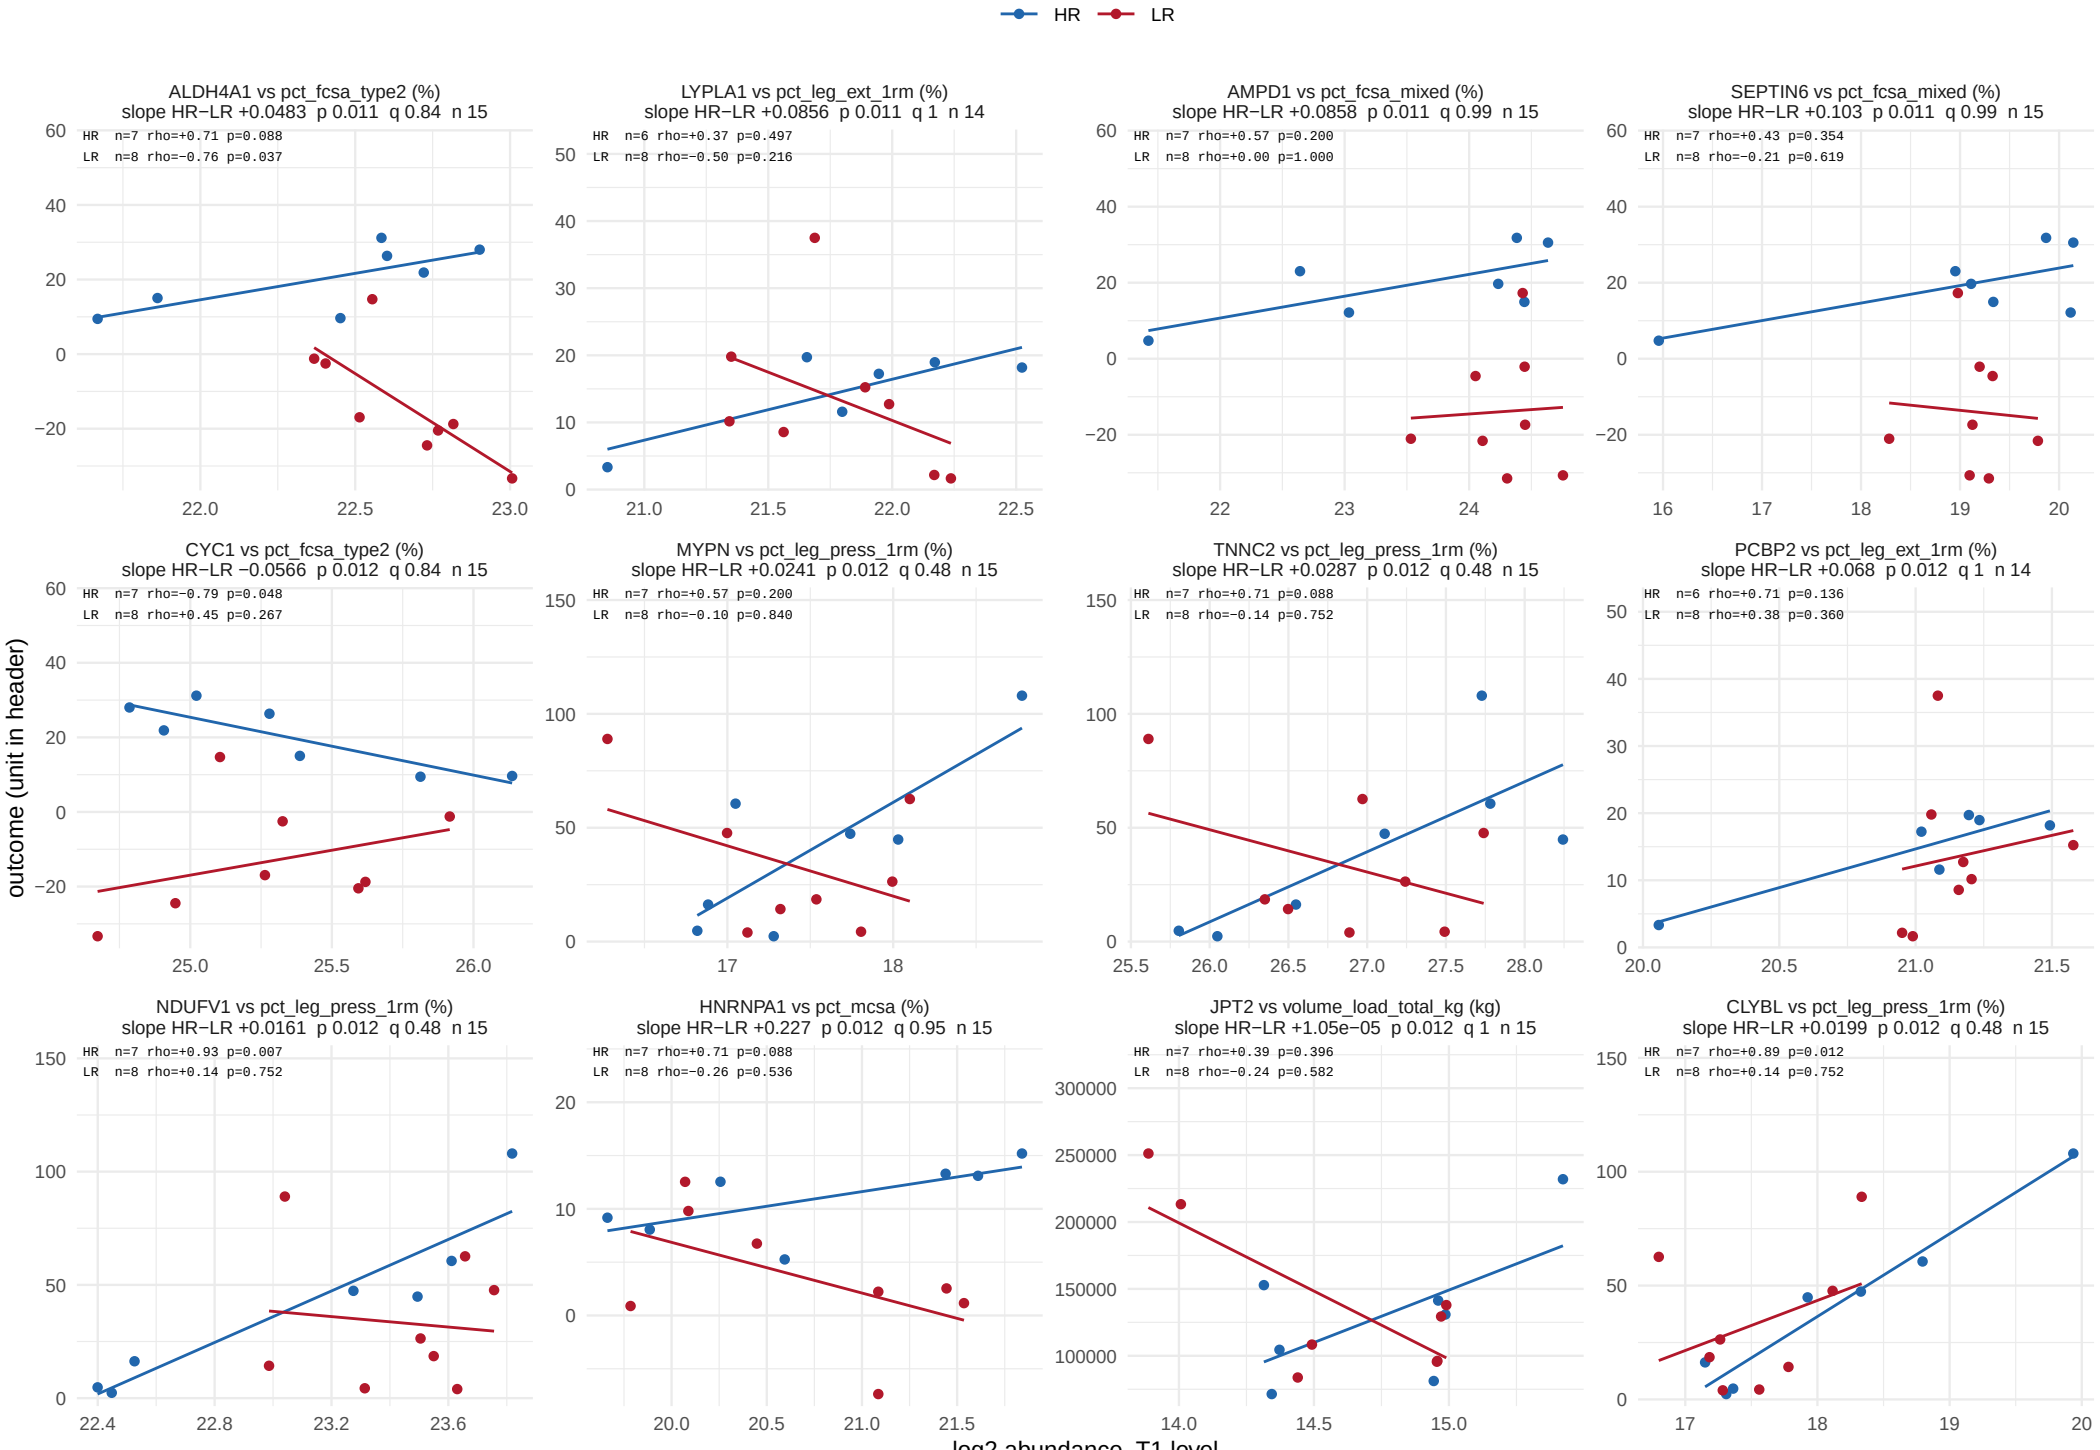

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


565 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 12 of 48.

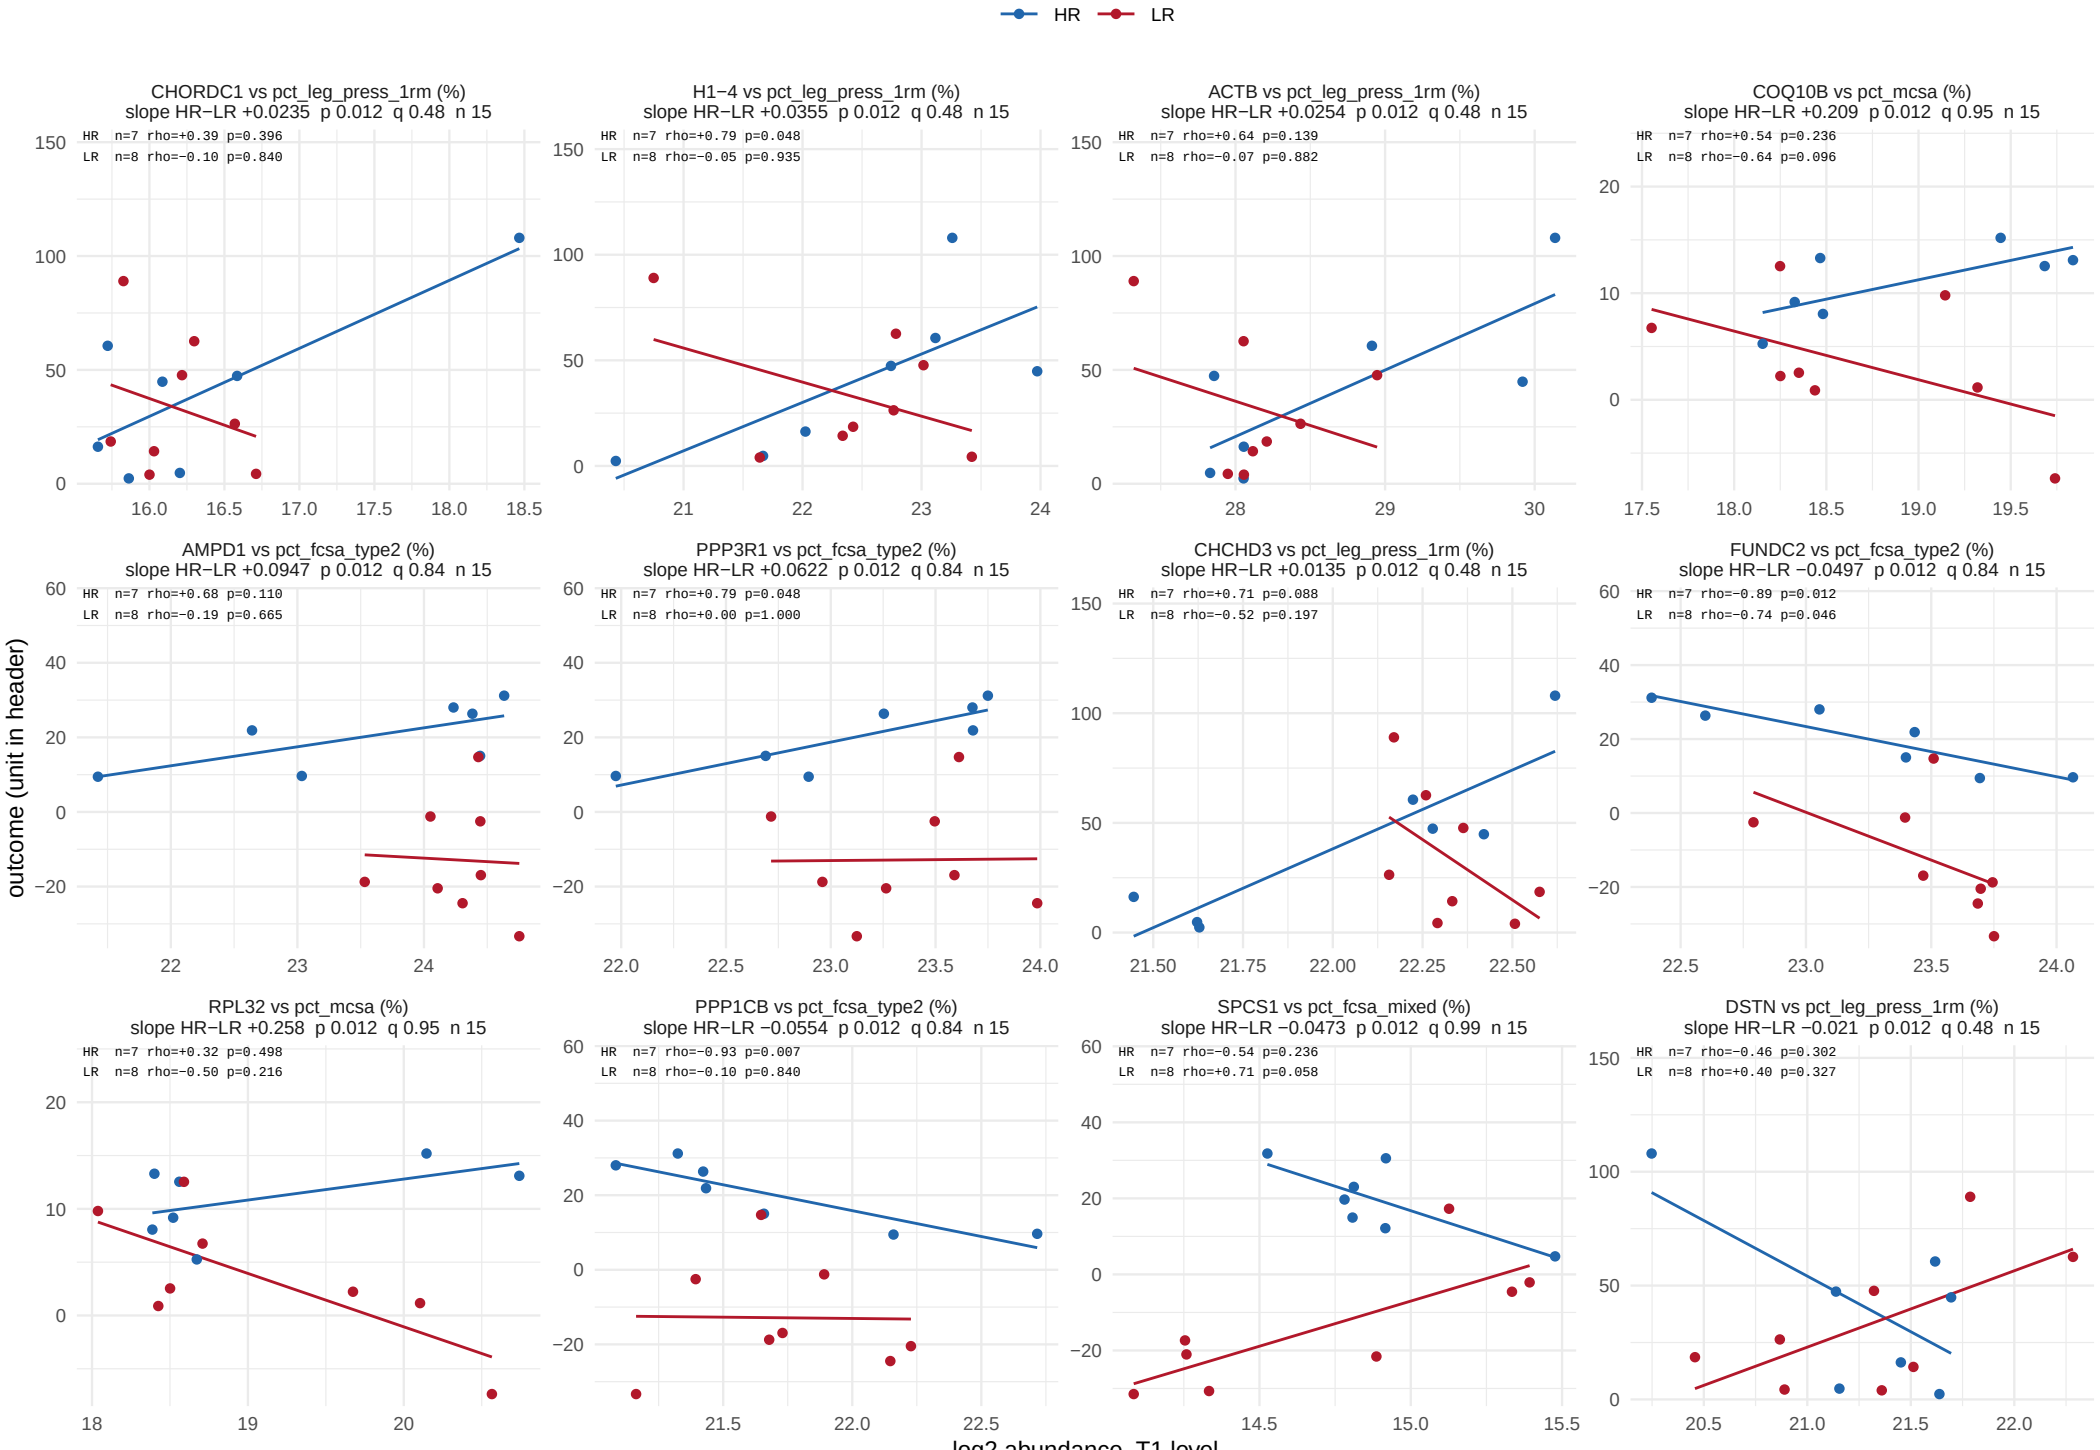

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


565 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 13 of 48.

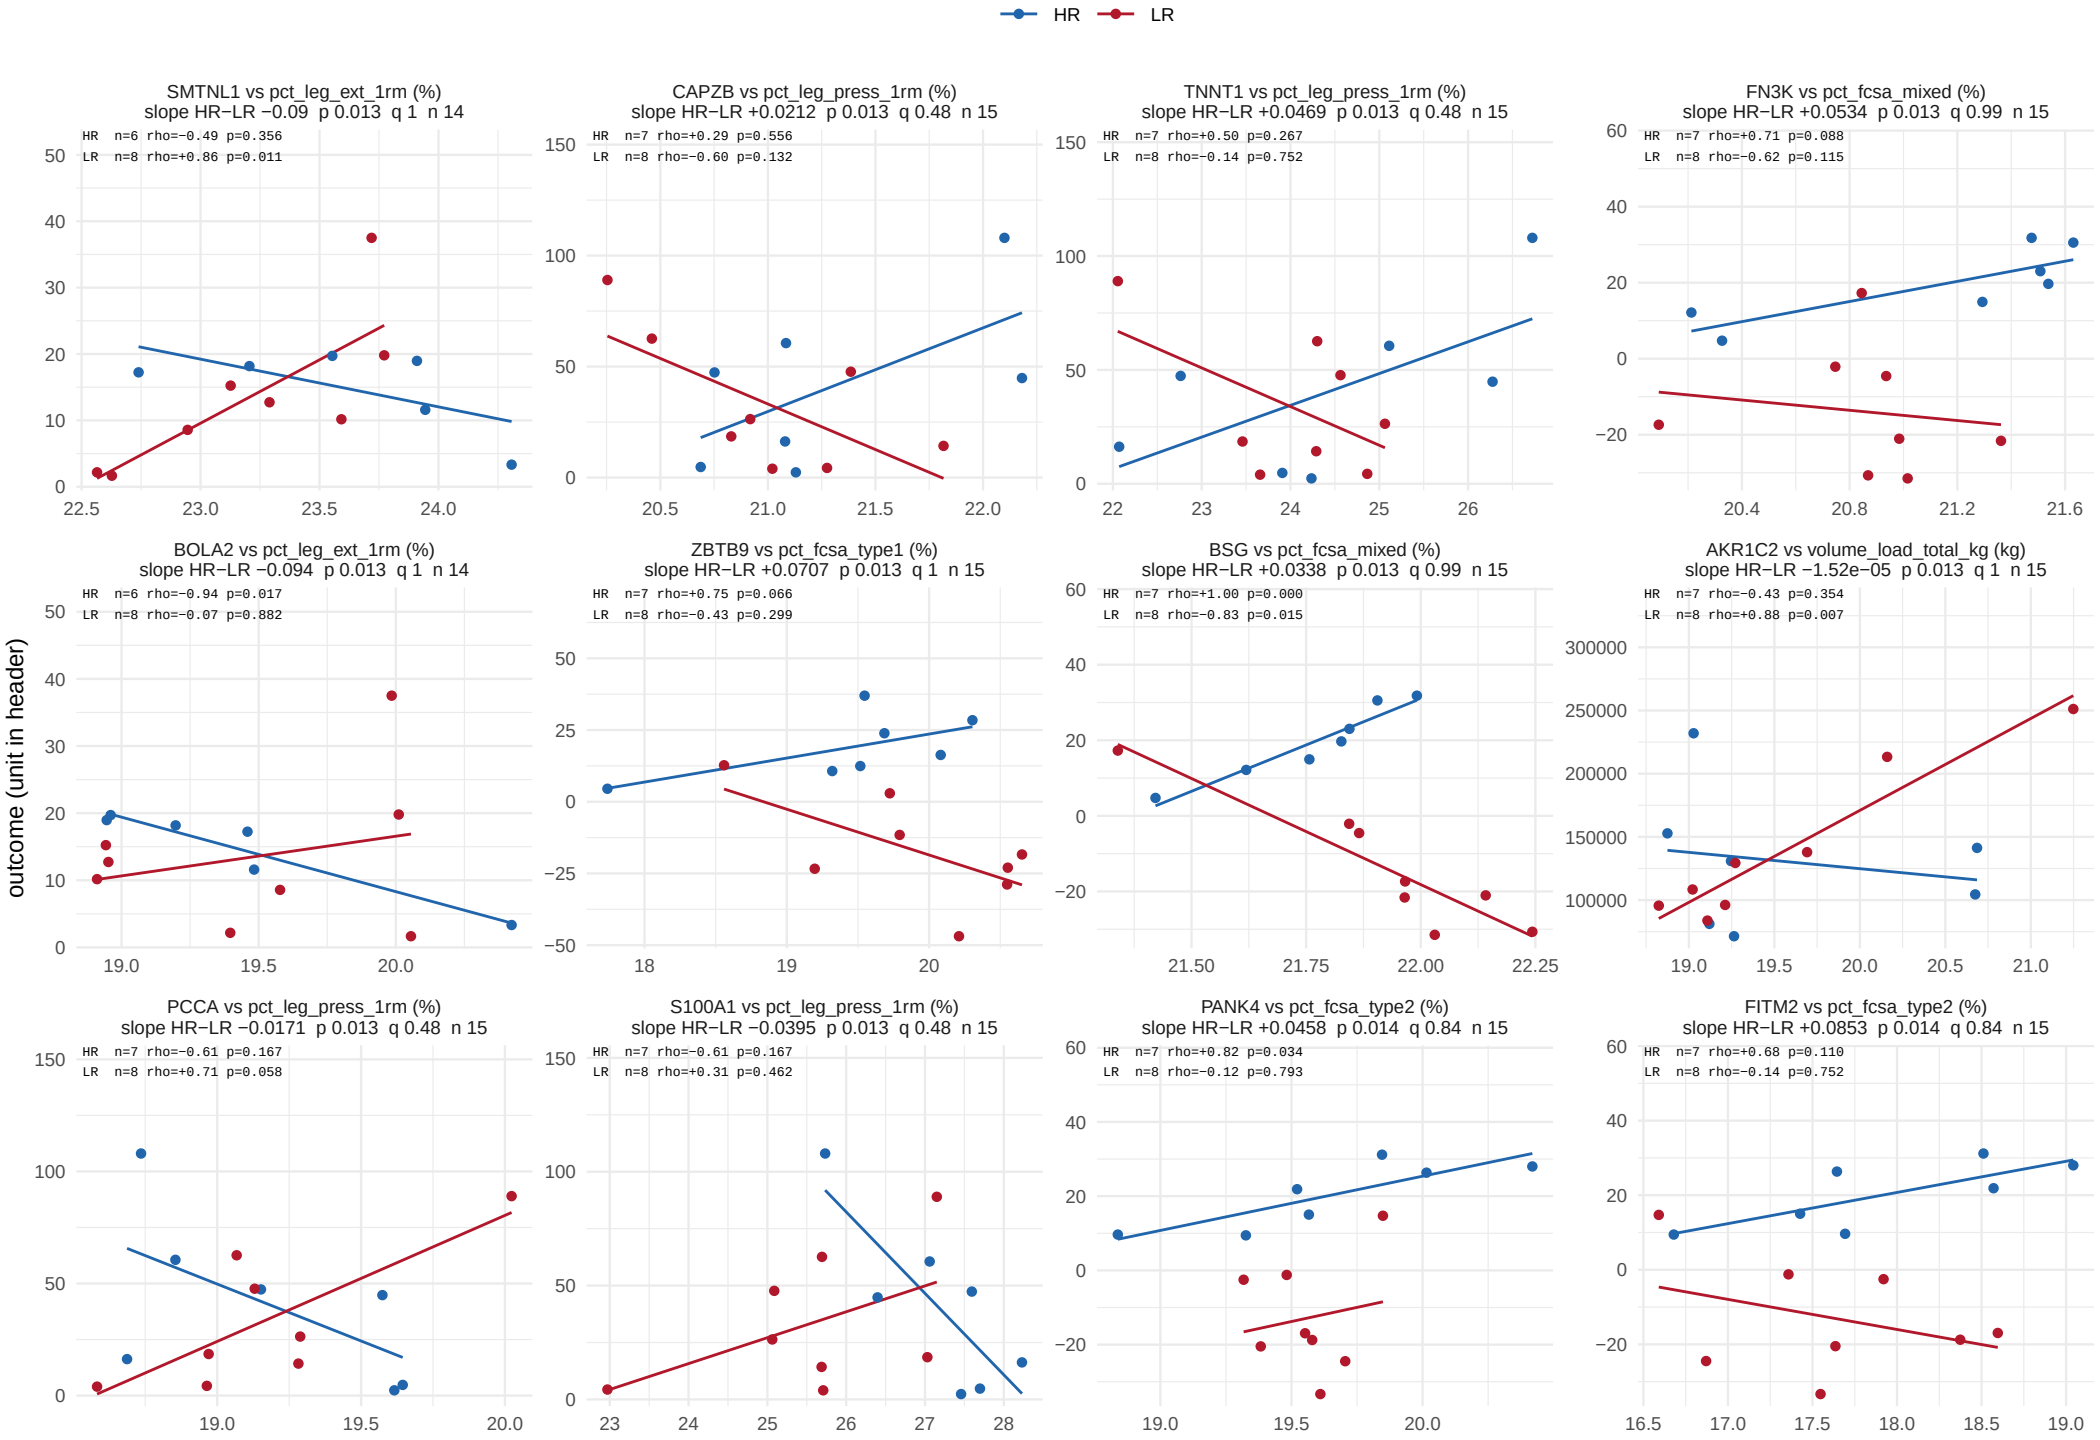

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


565 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 14 of 48.

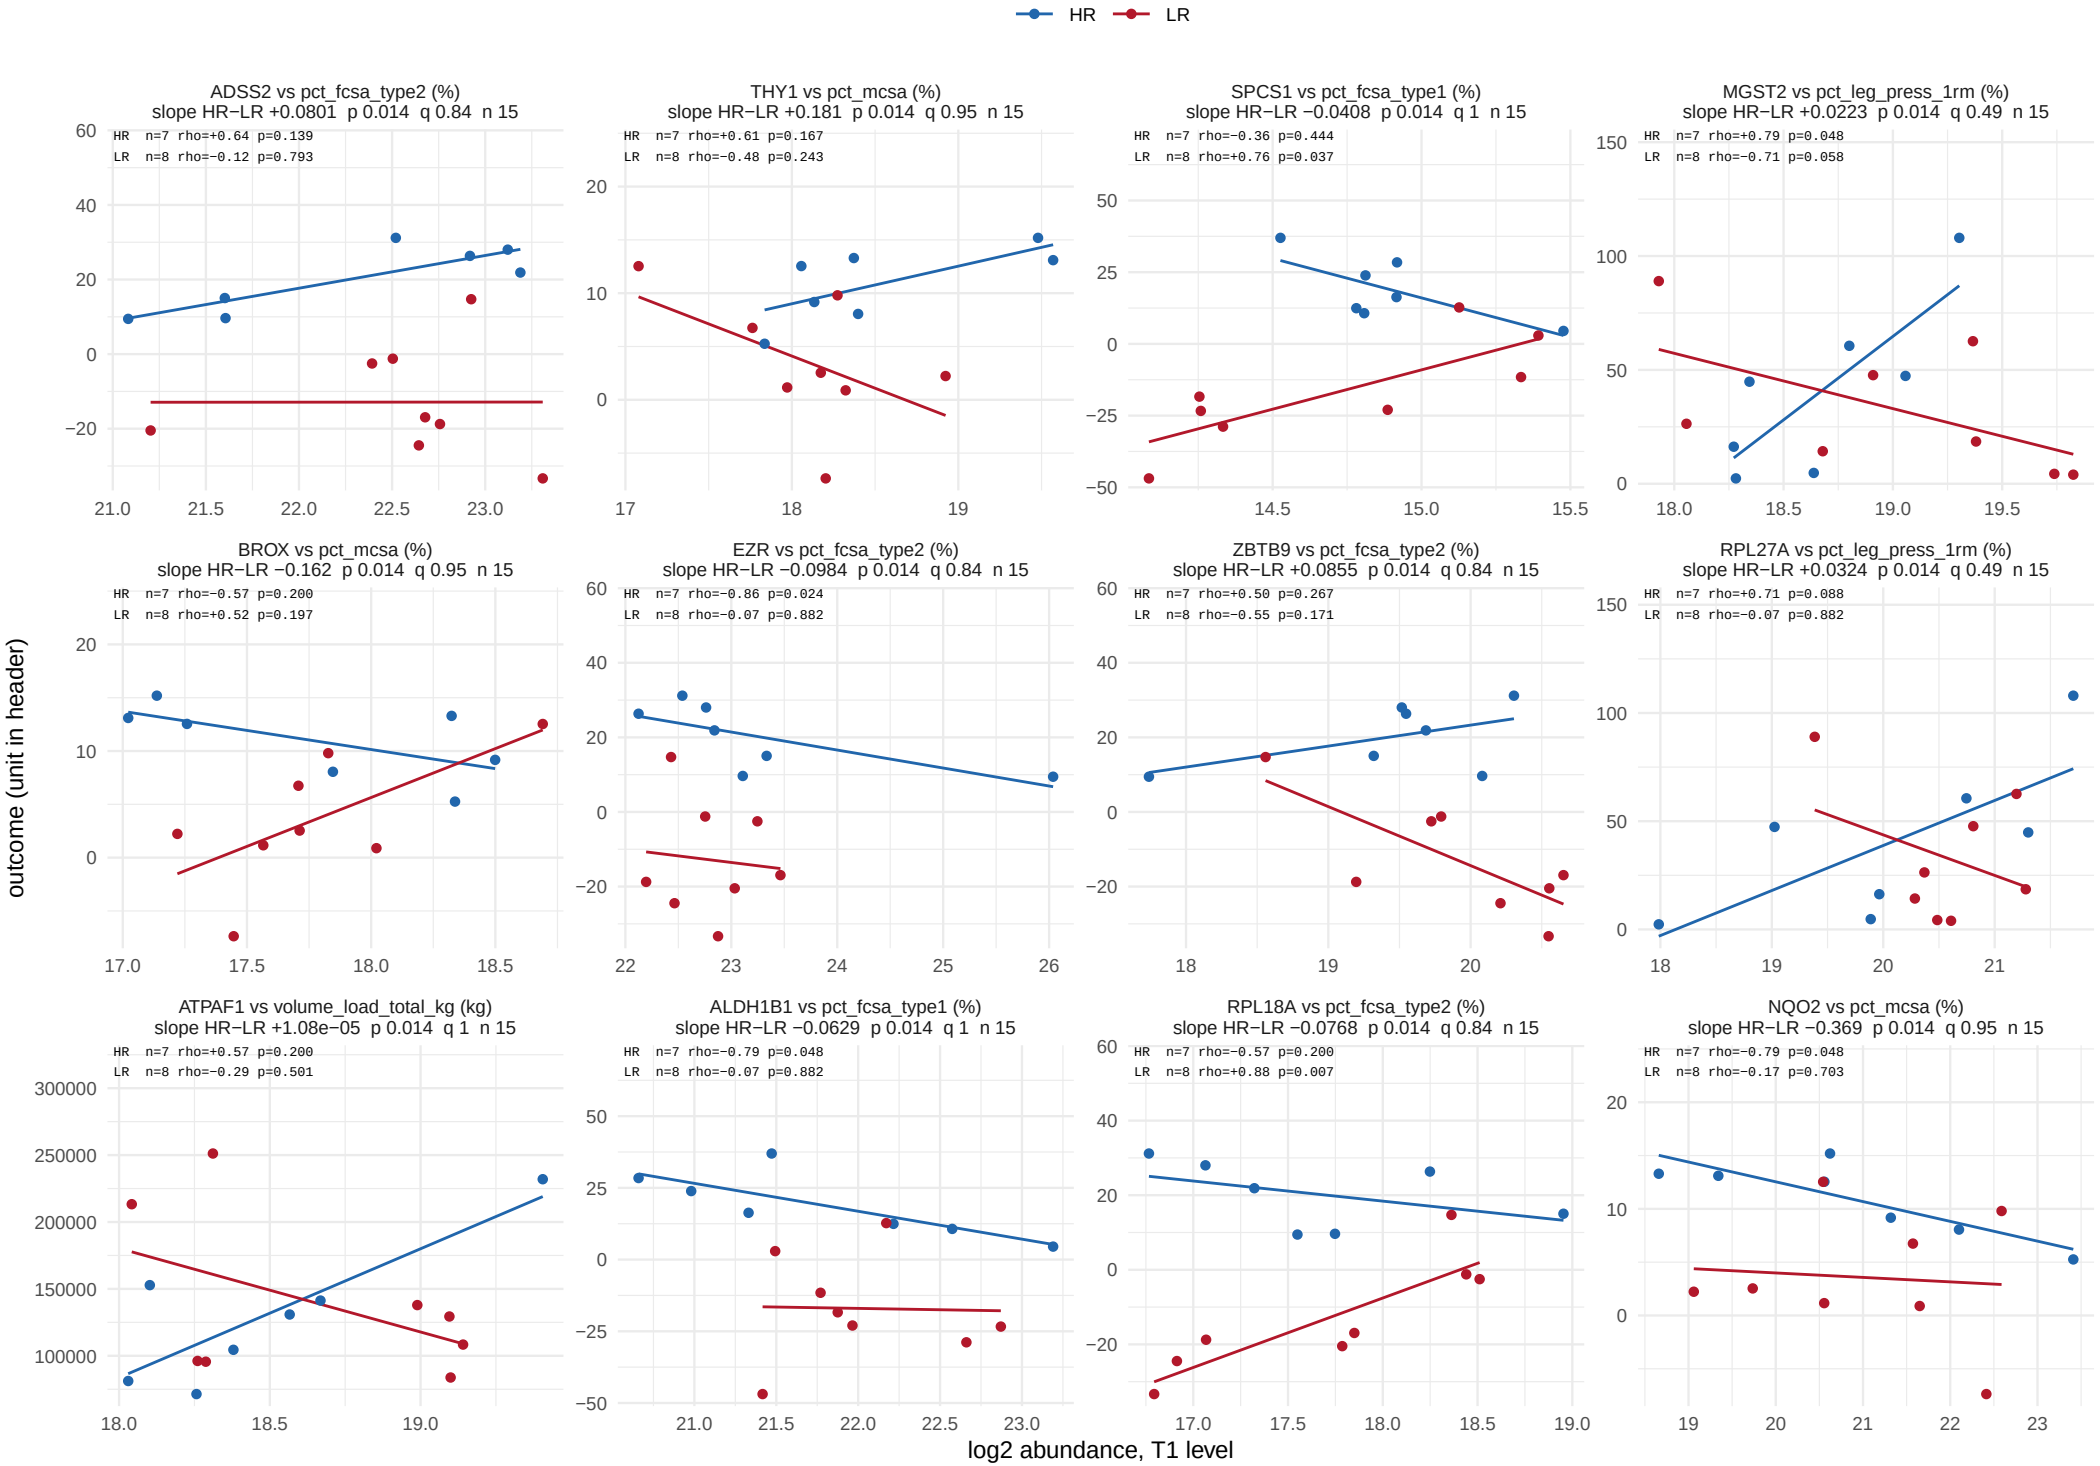

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


565 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 15 of 48.

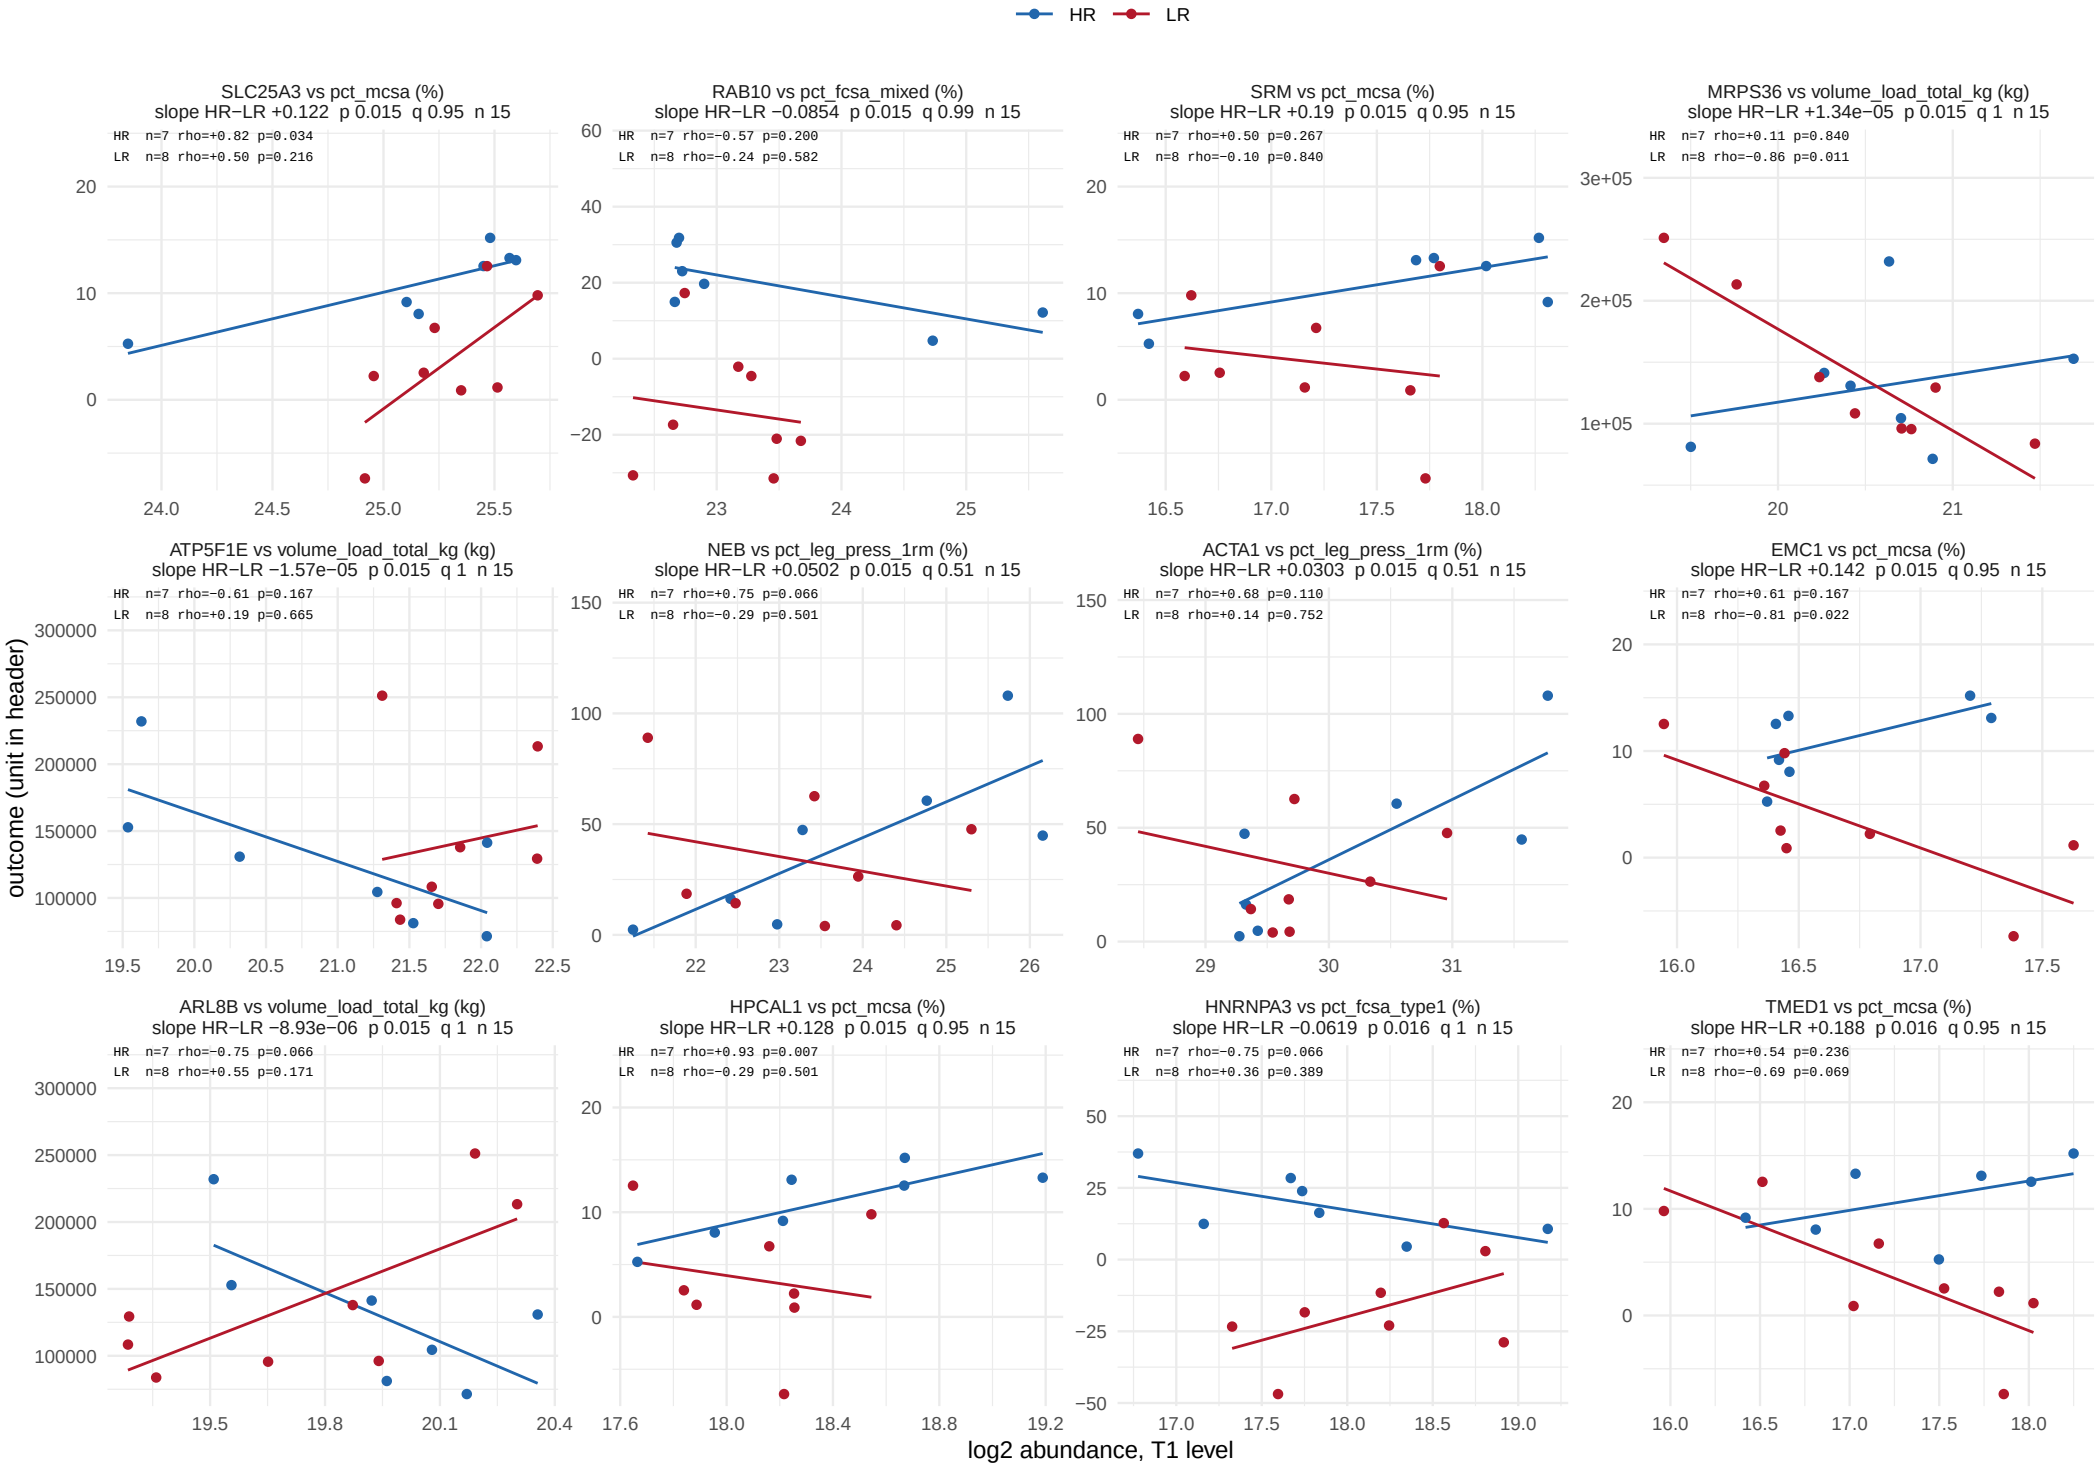

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


565 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 16 of 48.

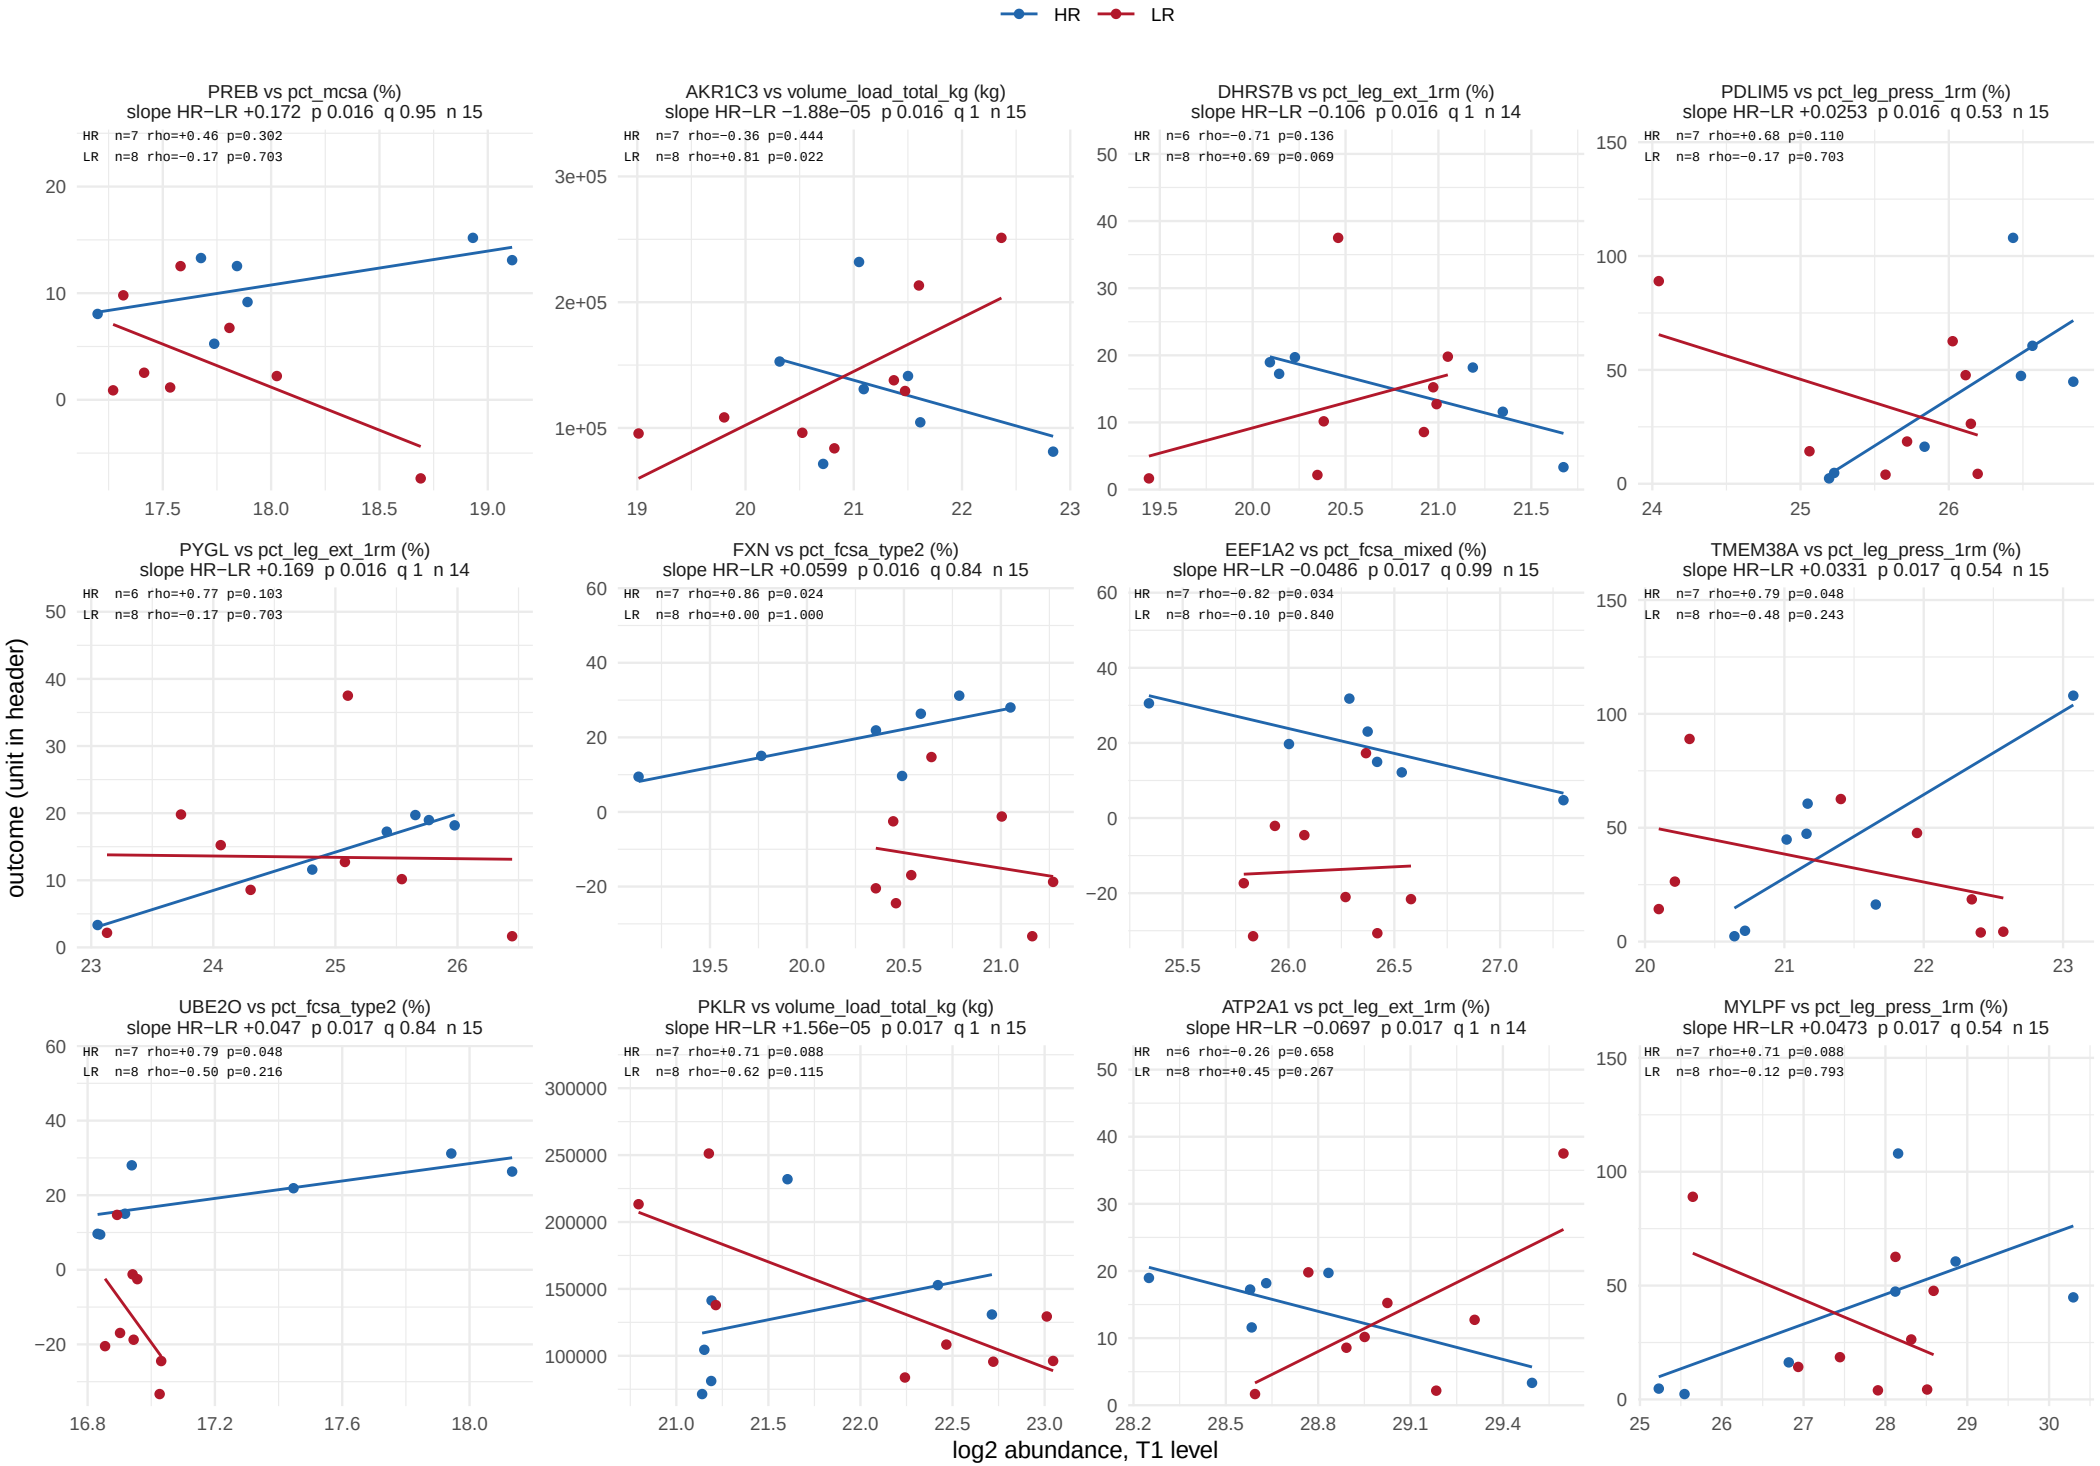

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


565 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 17 of 48.

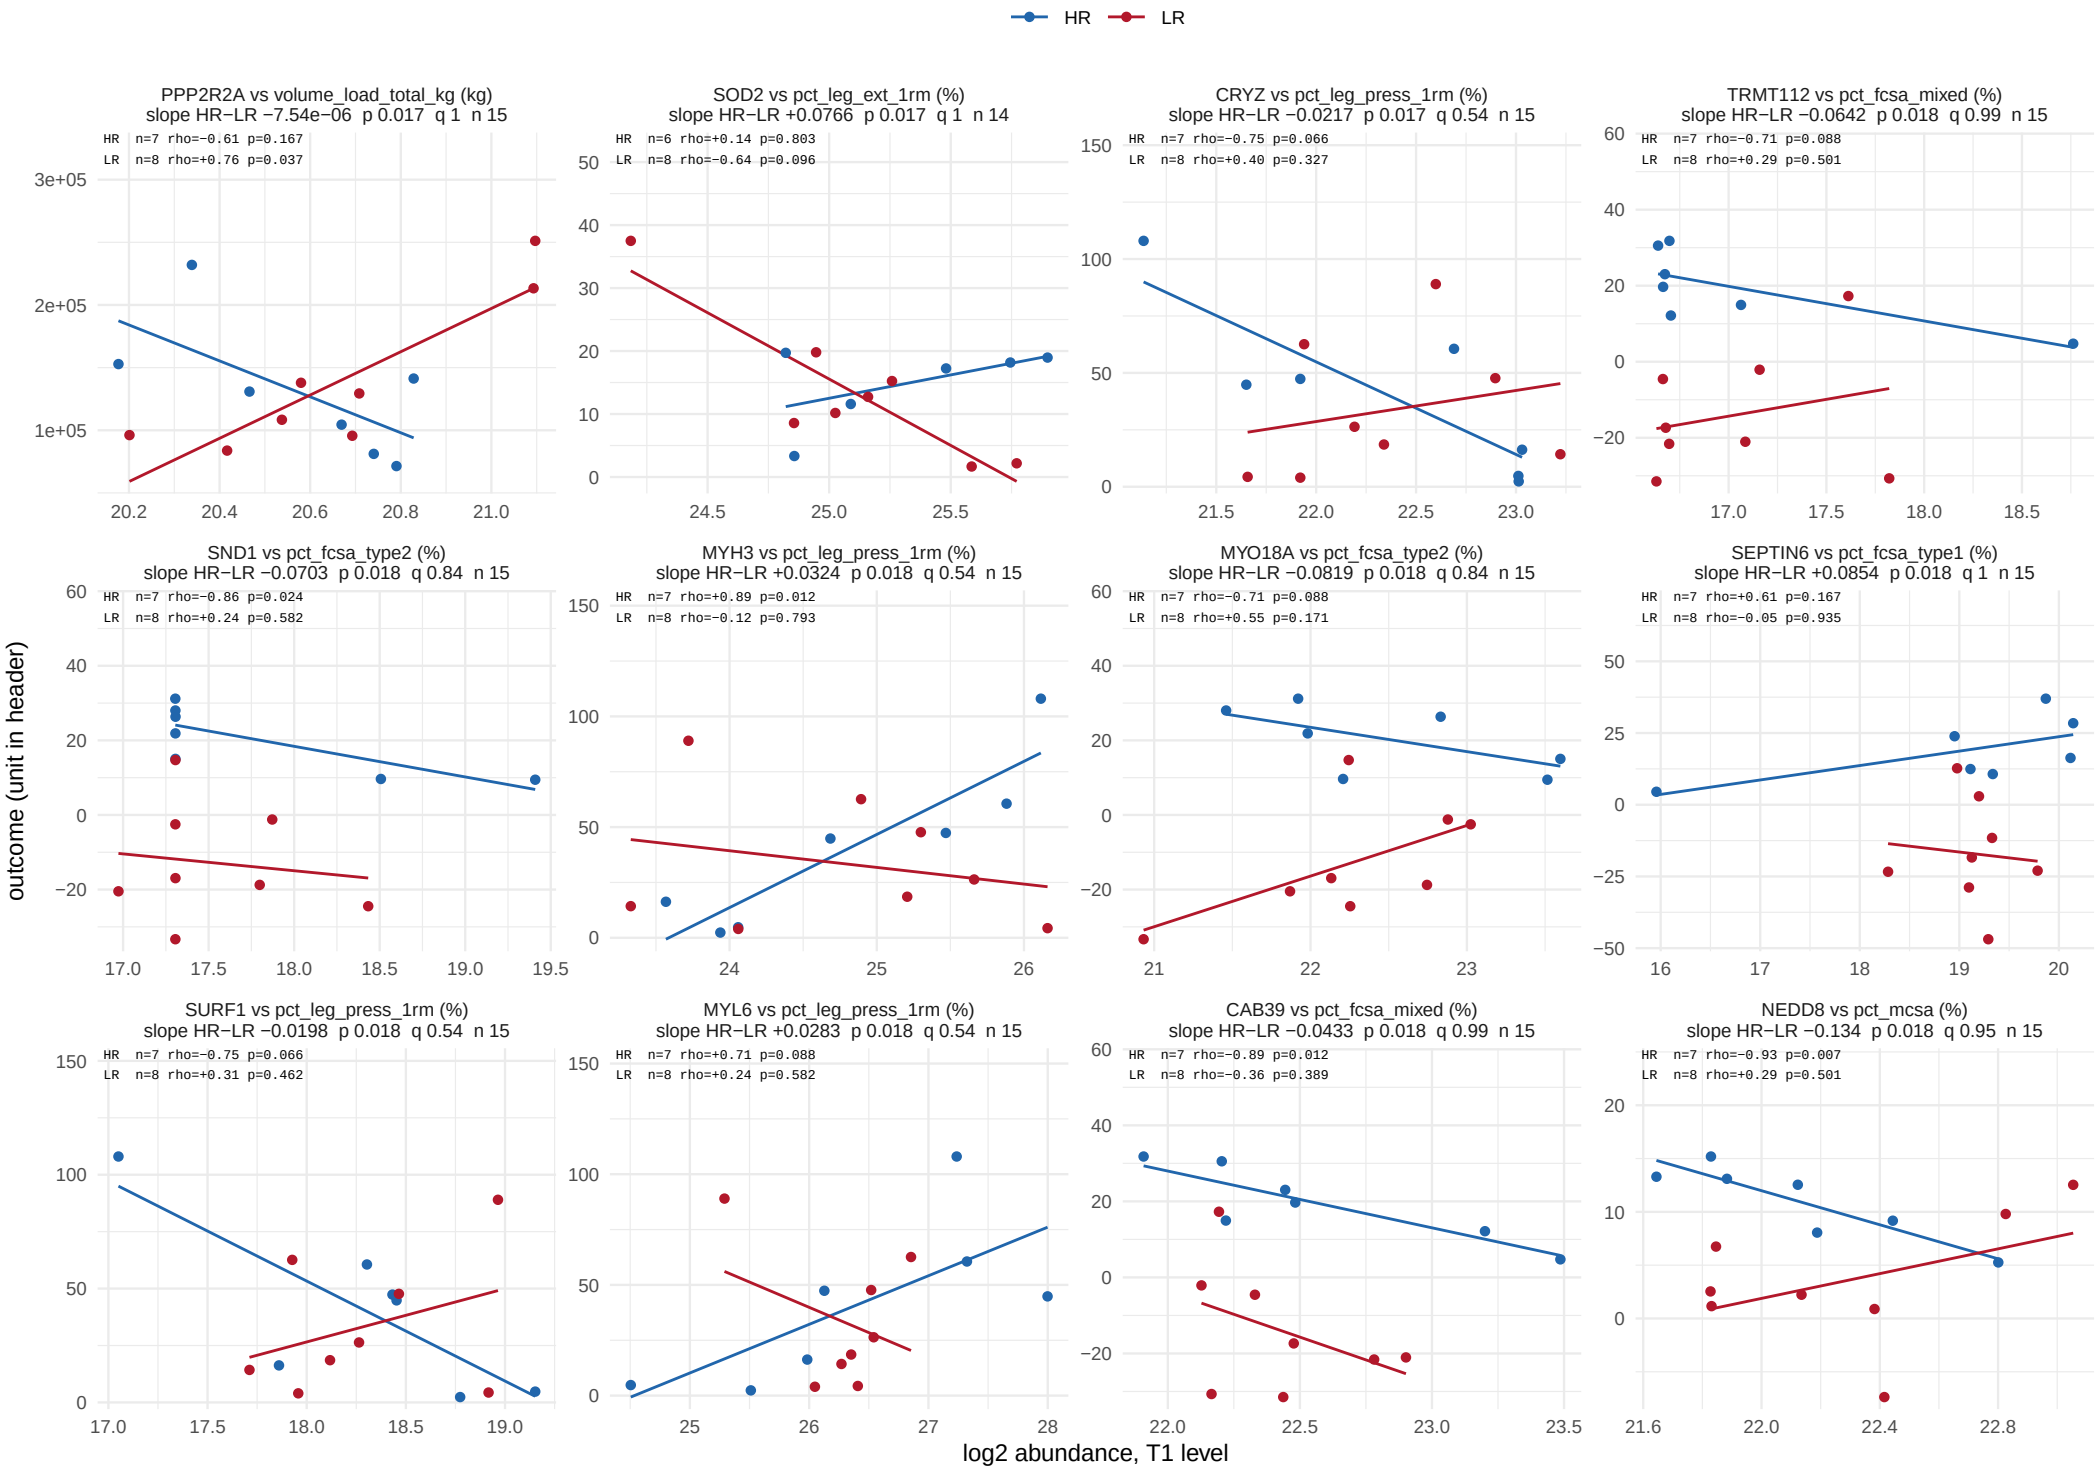

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


565 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 18 of 48.

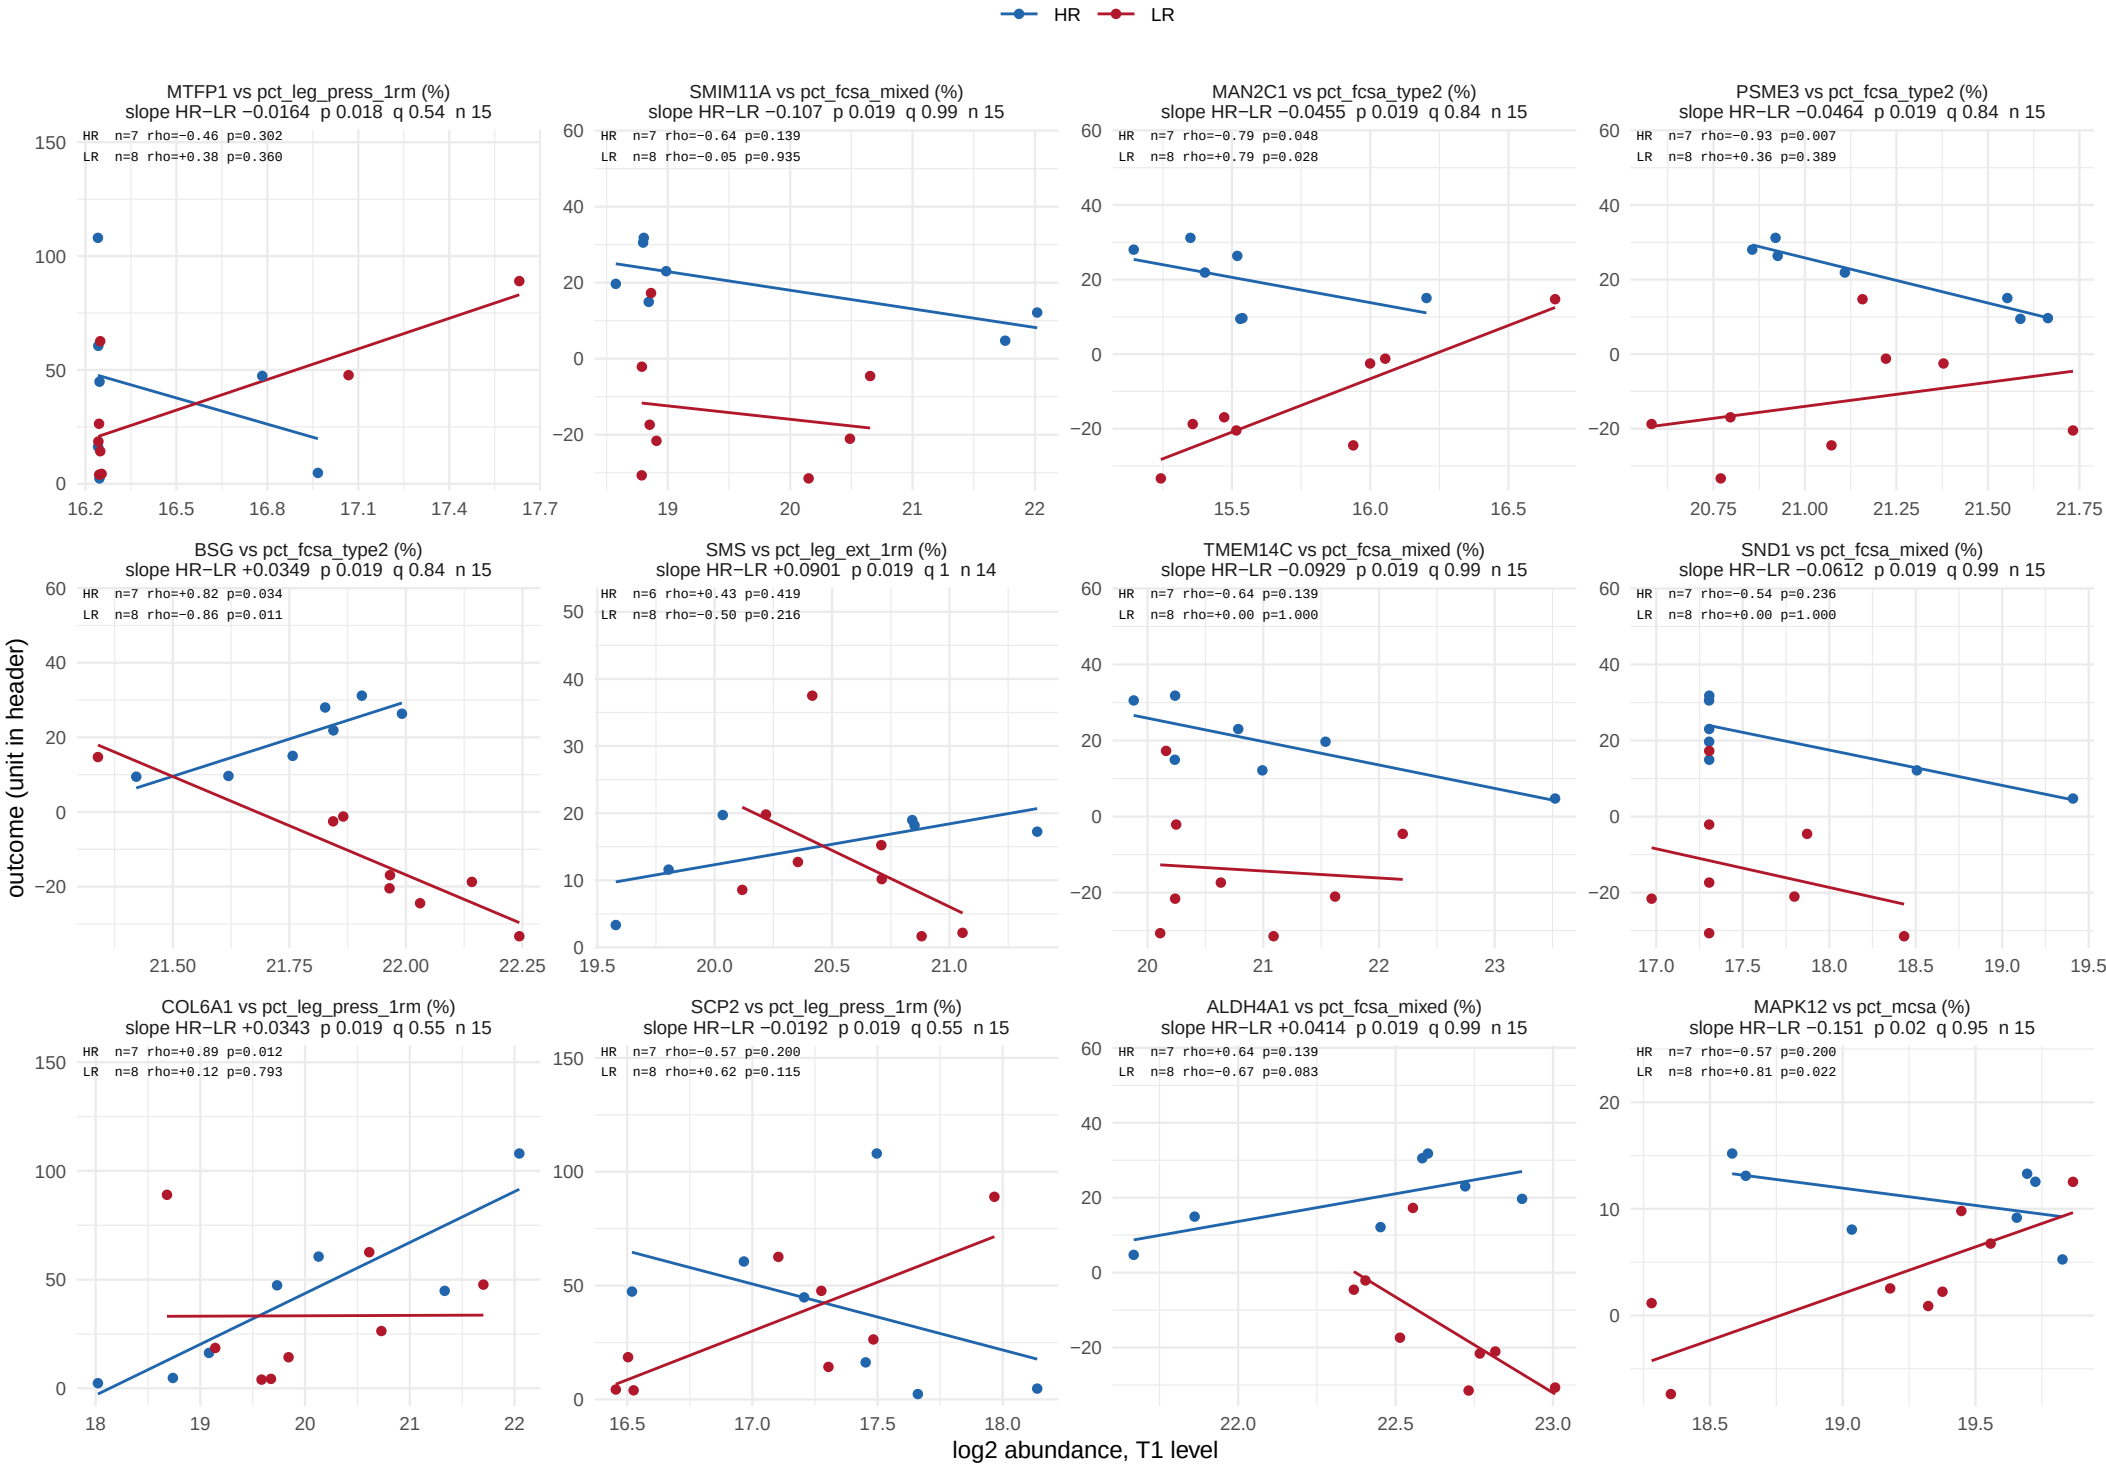

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


565 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 19 of 48.

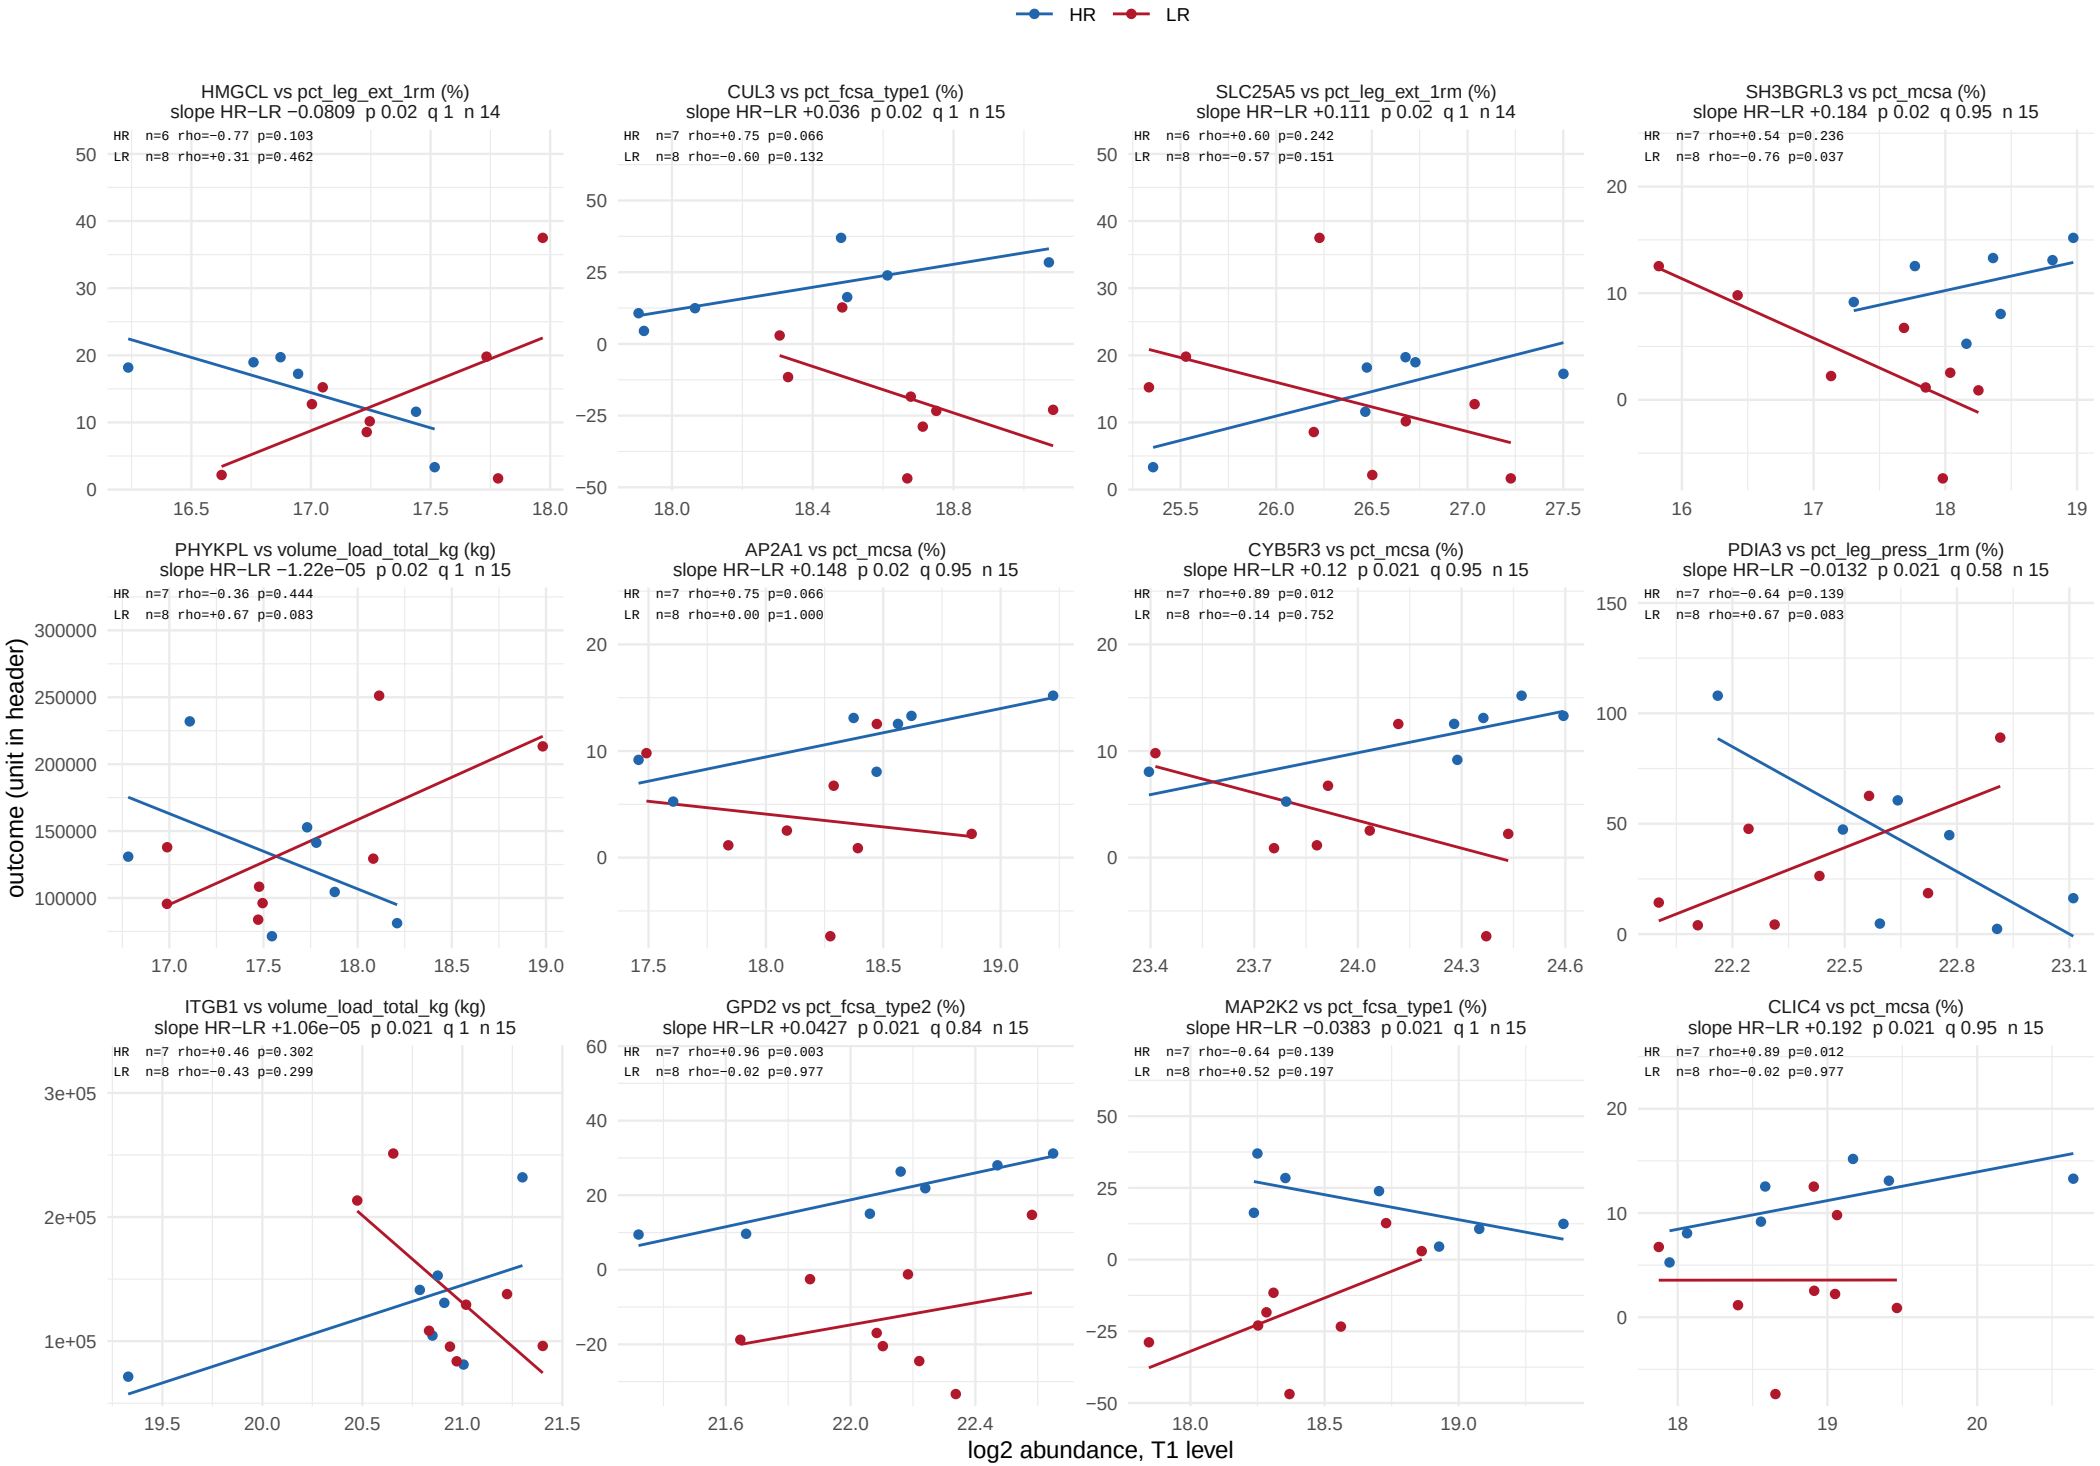

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


565 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 20 of 48.

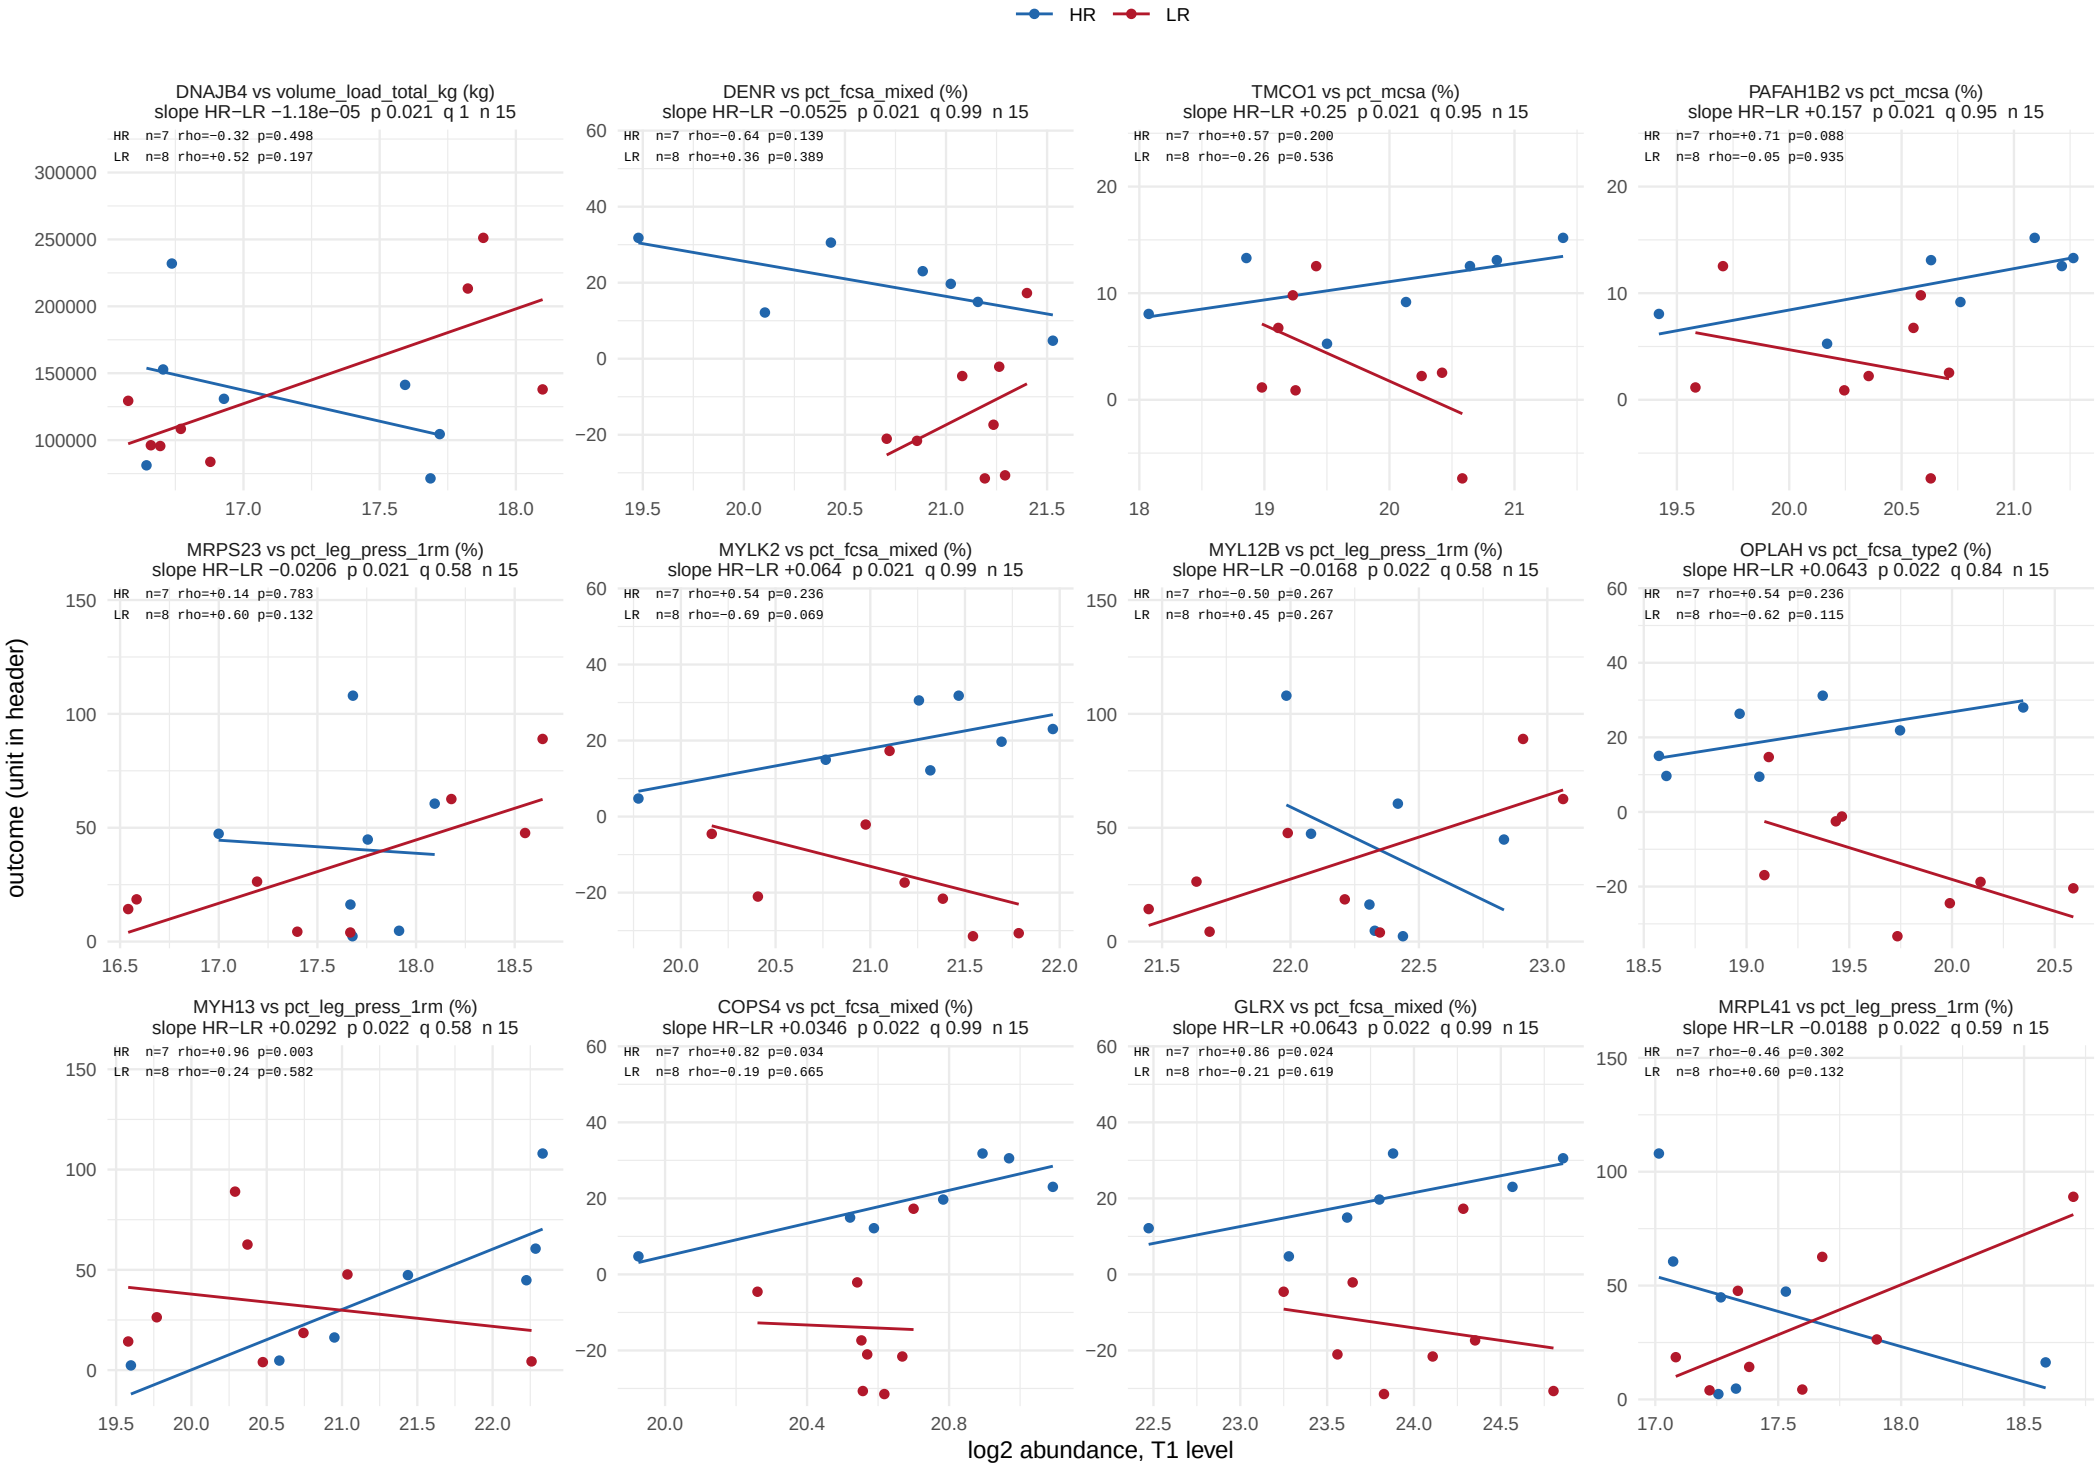

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


565 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 21 of 48.

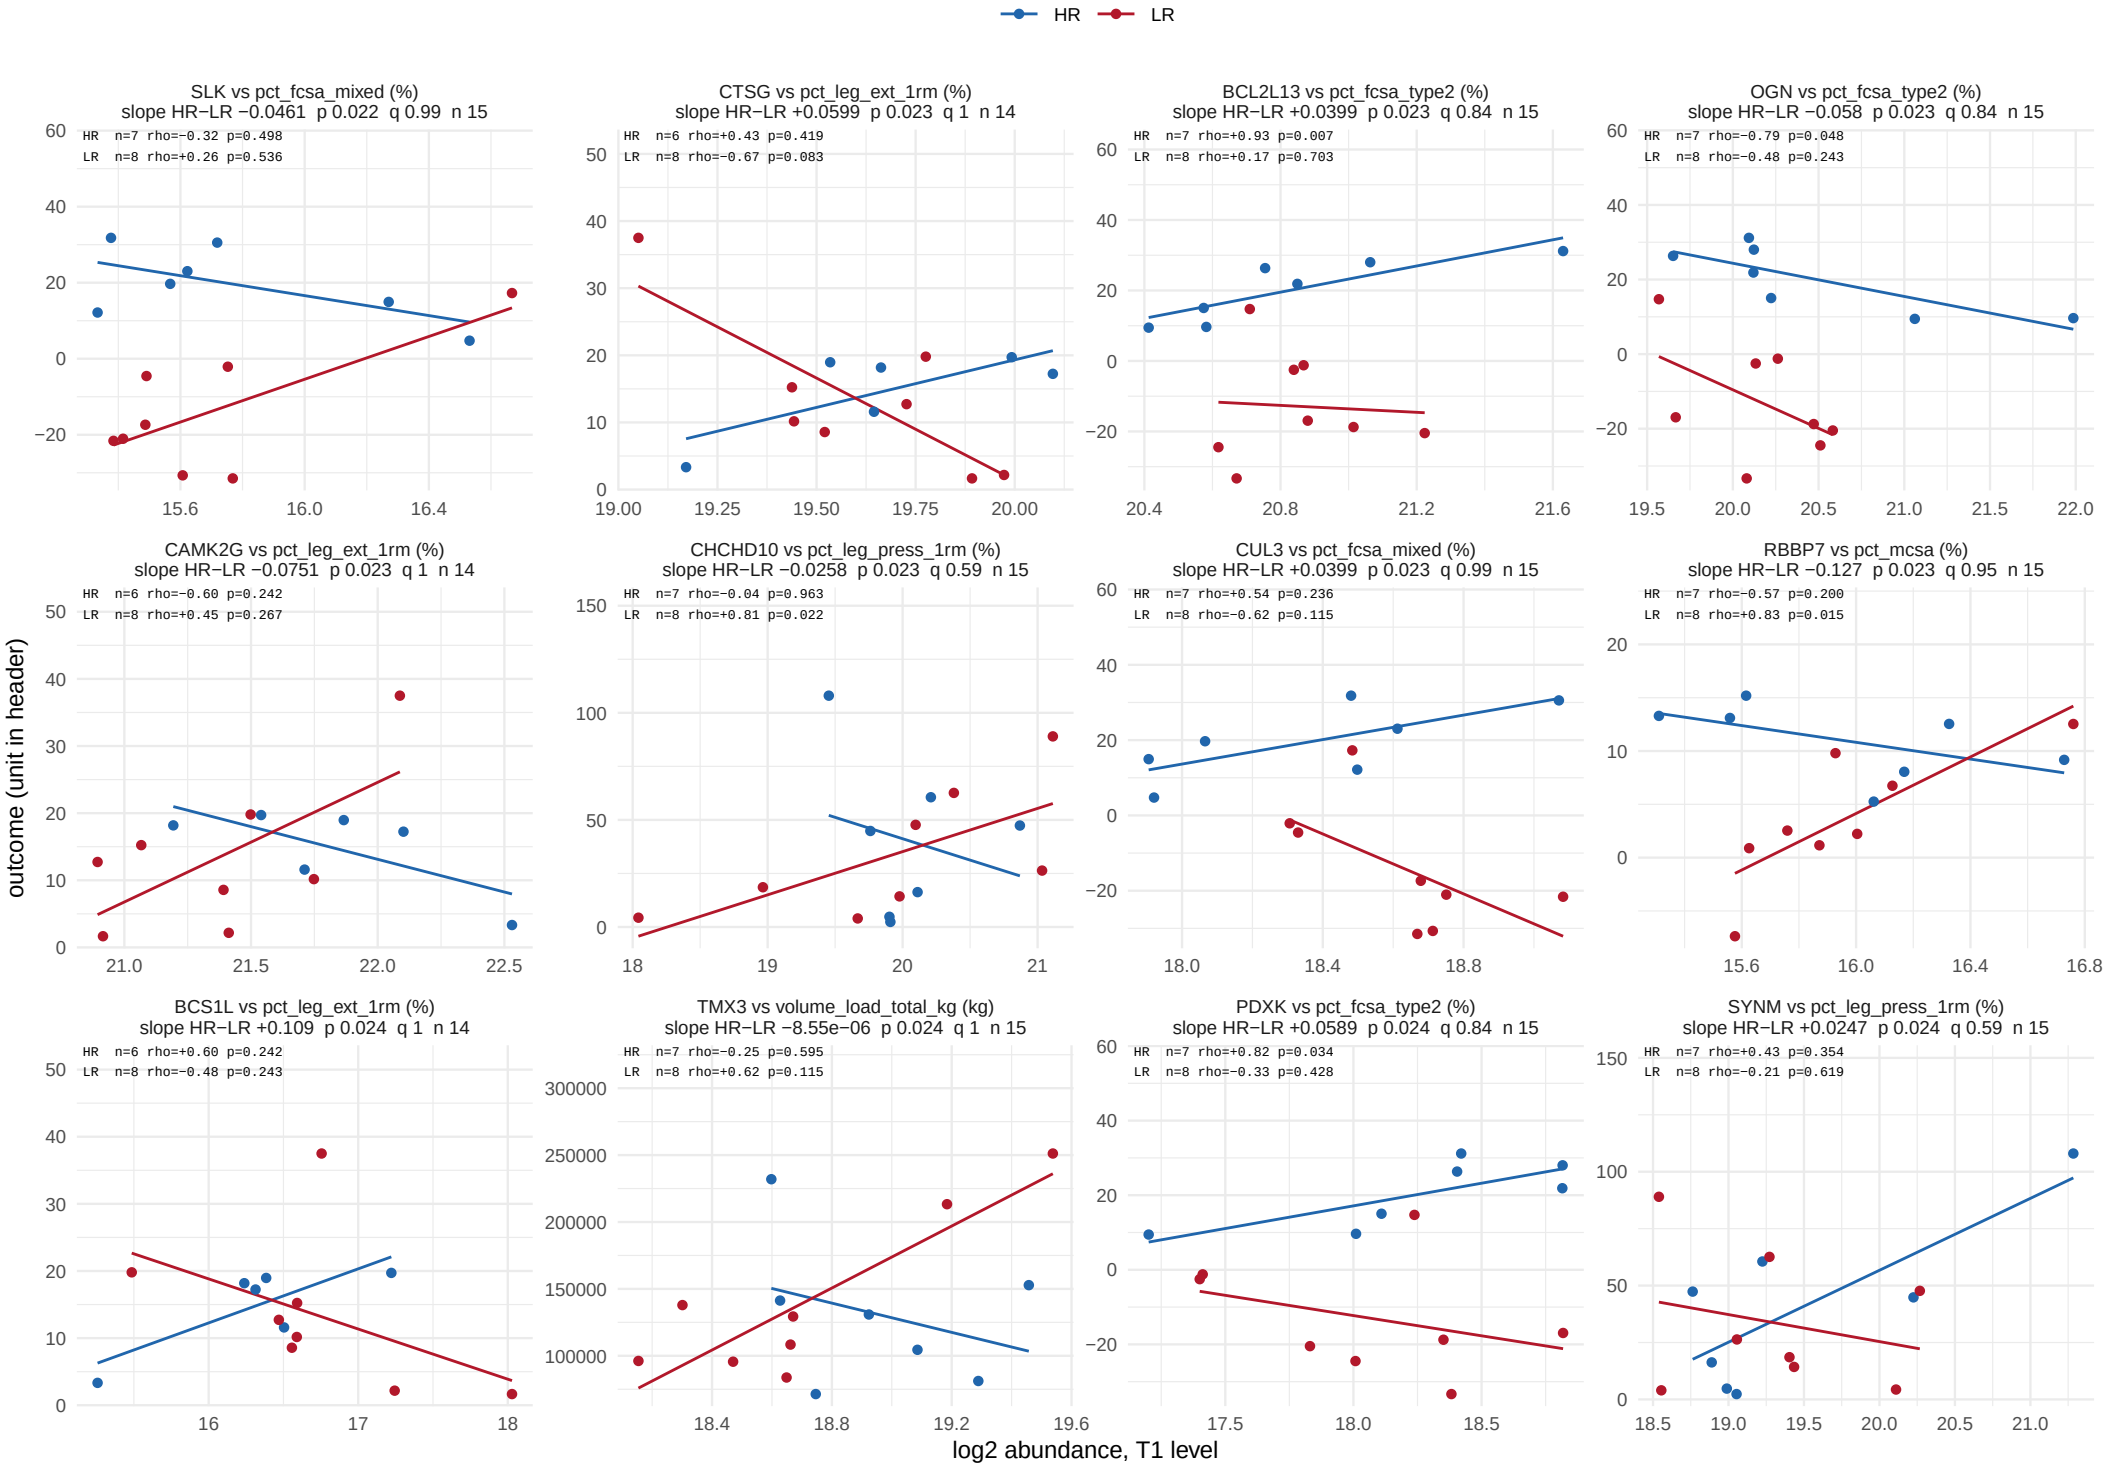

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


565 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 22 of 48.

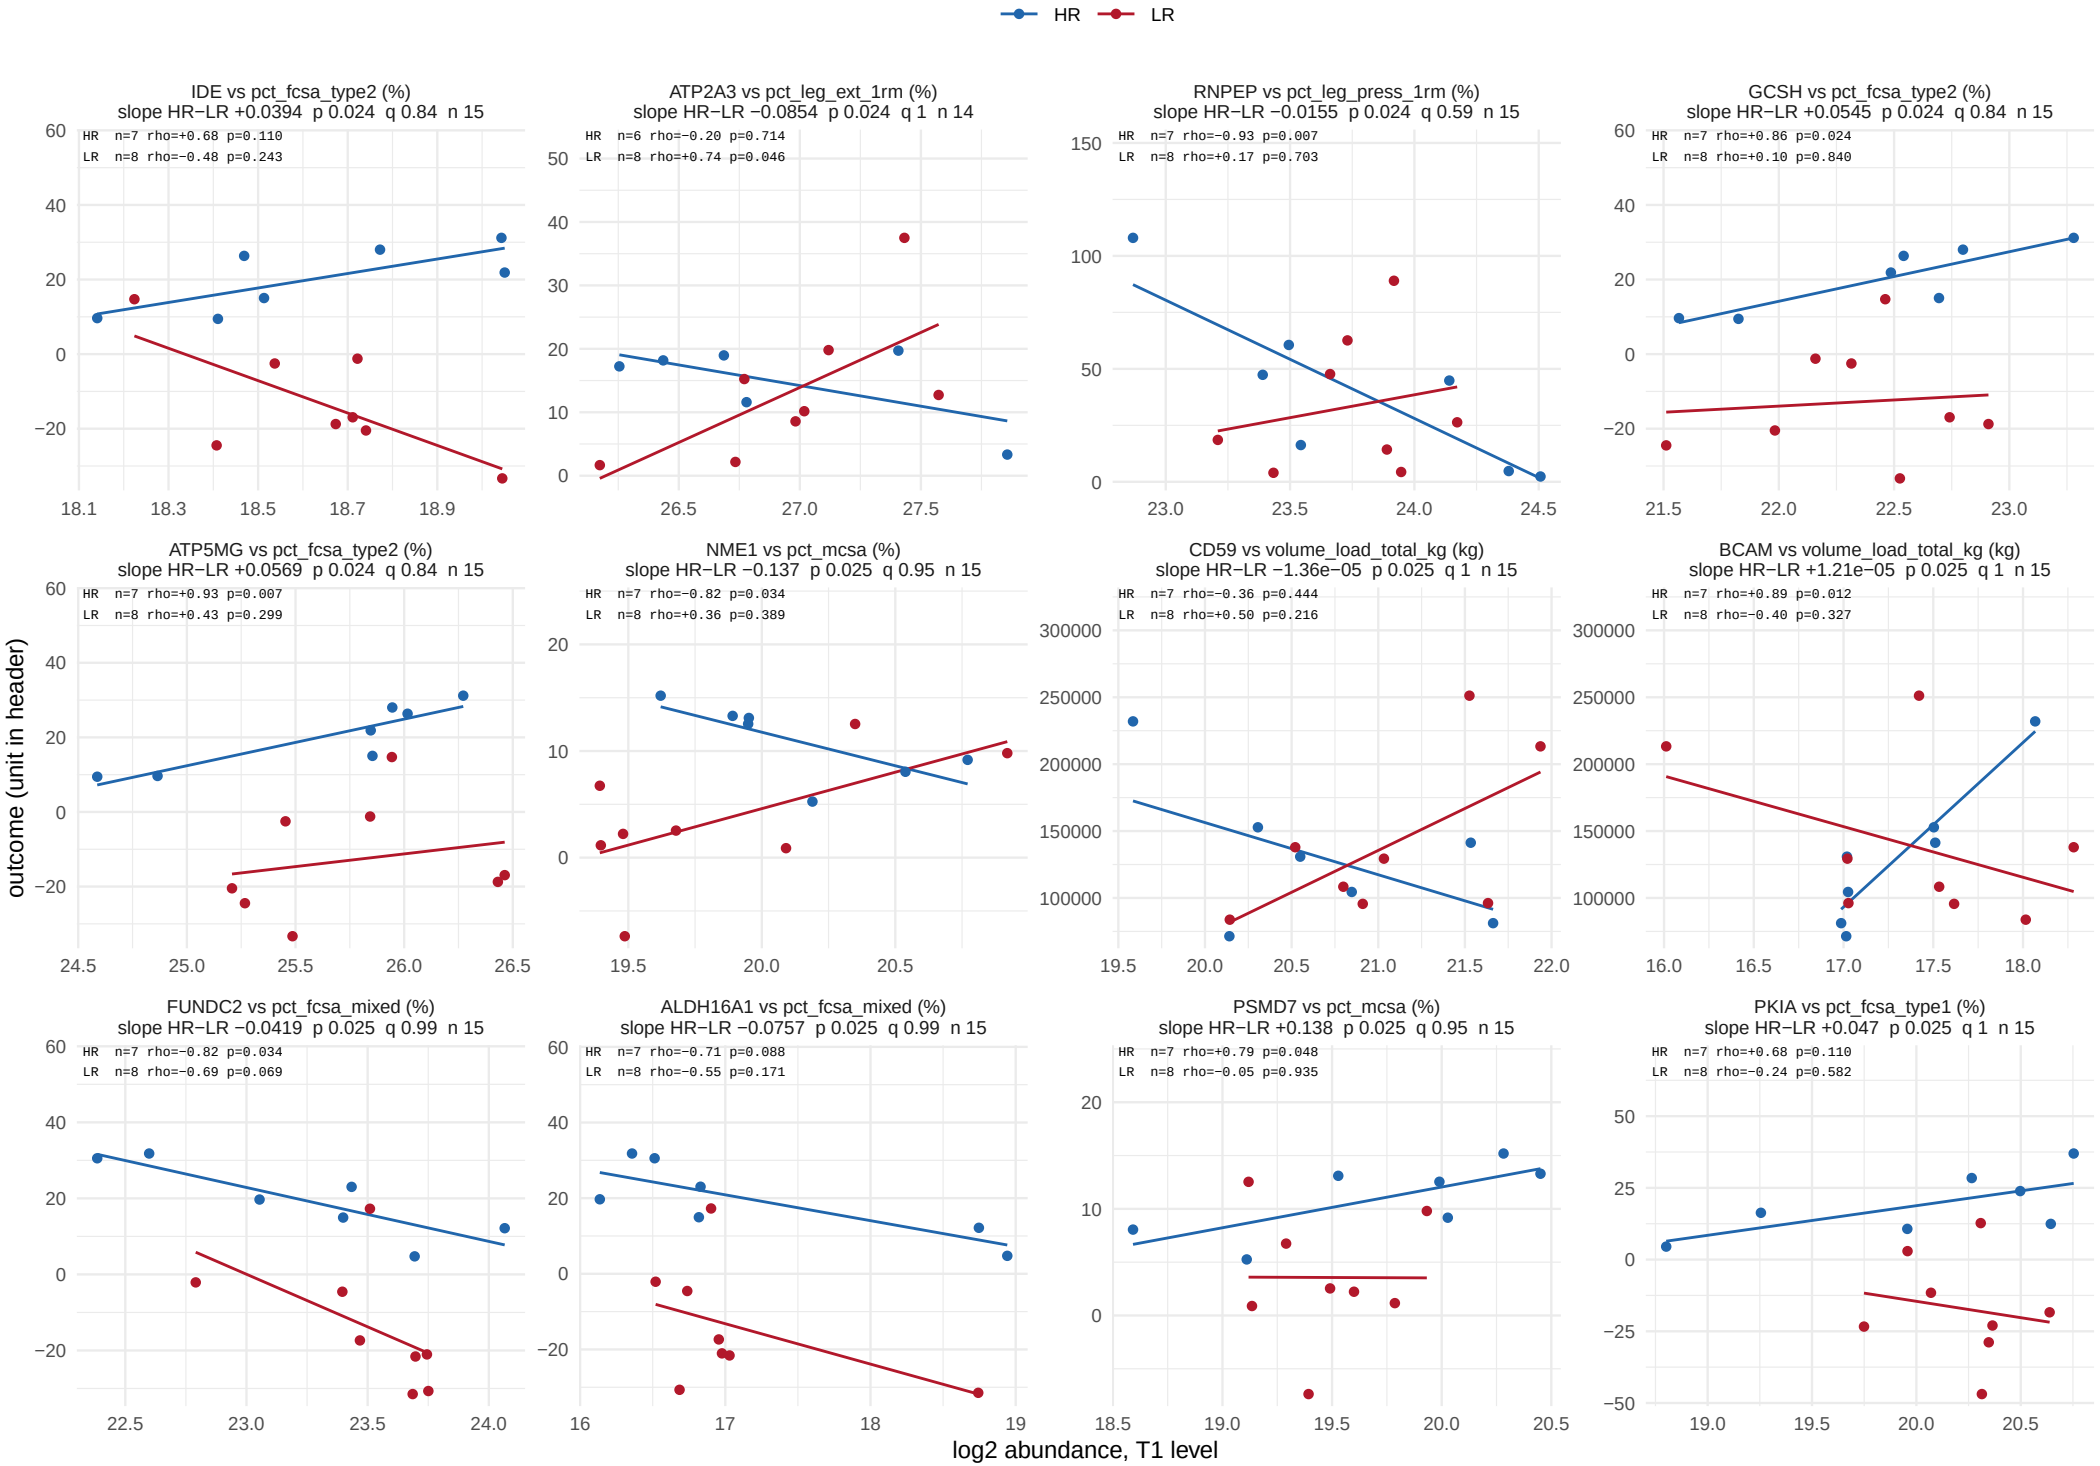

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


565 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 23 of 48.

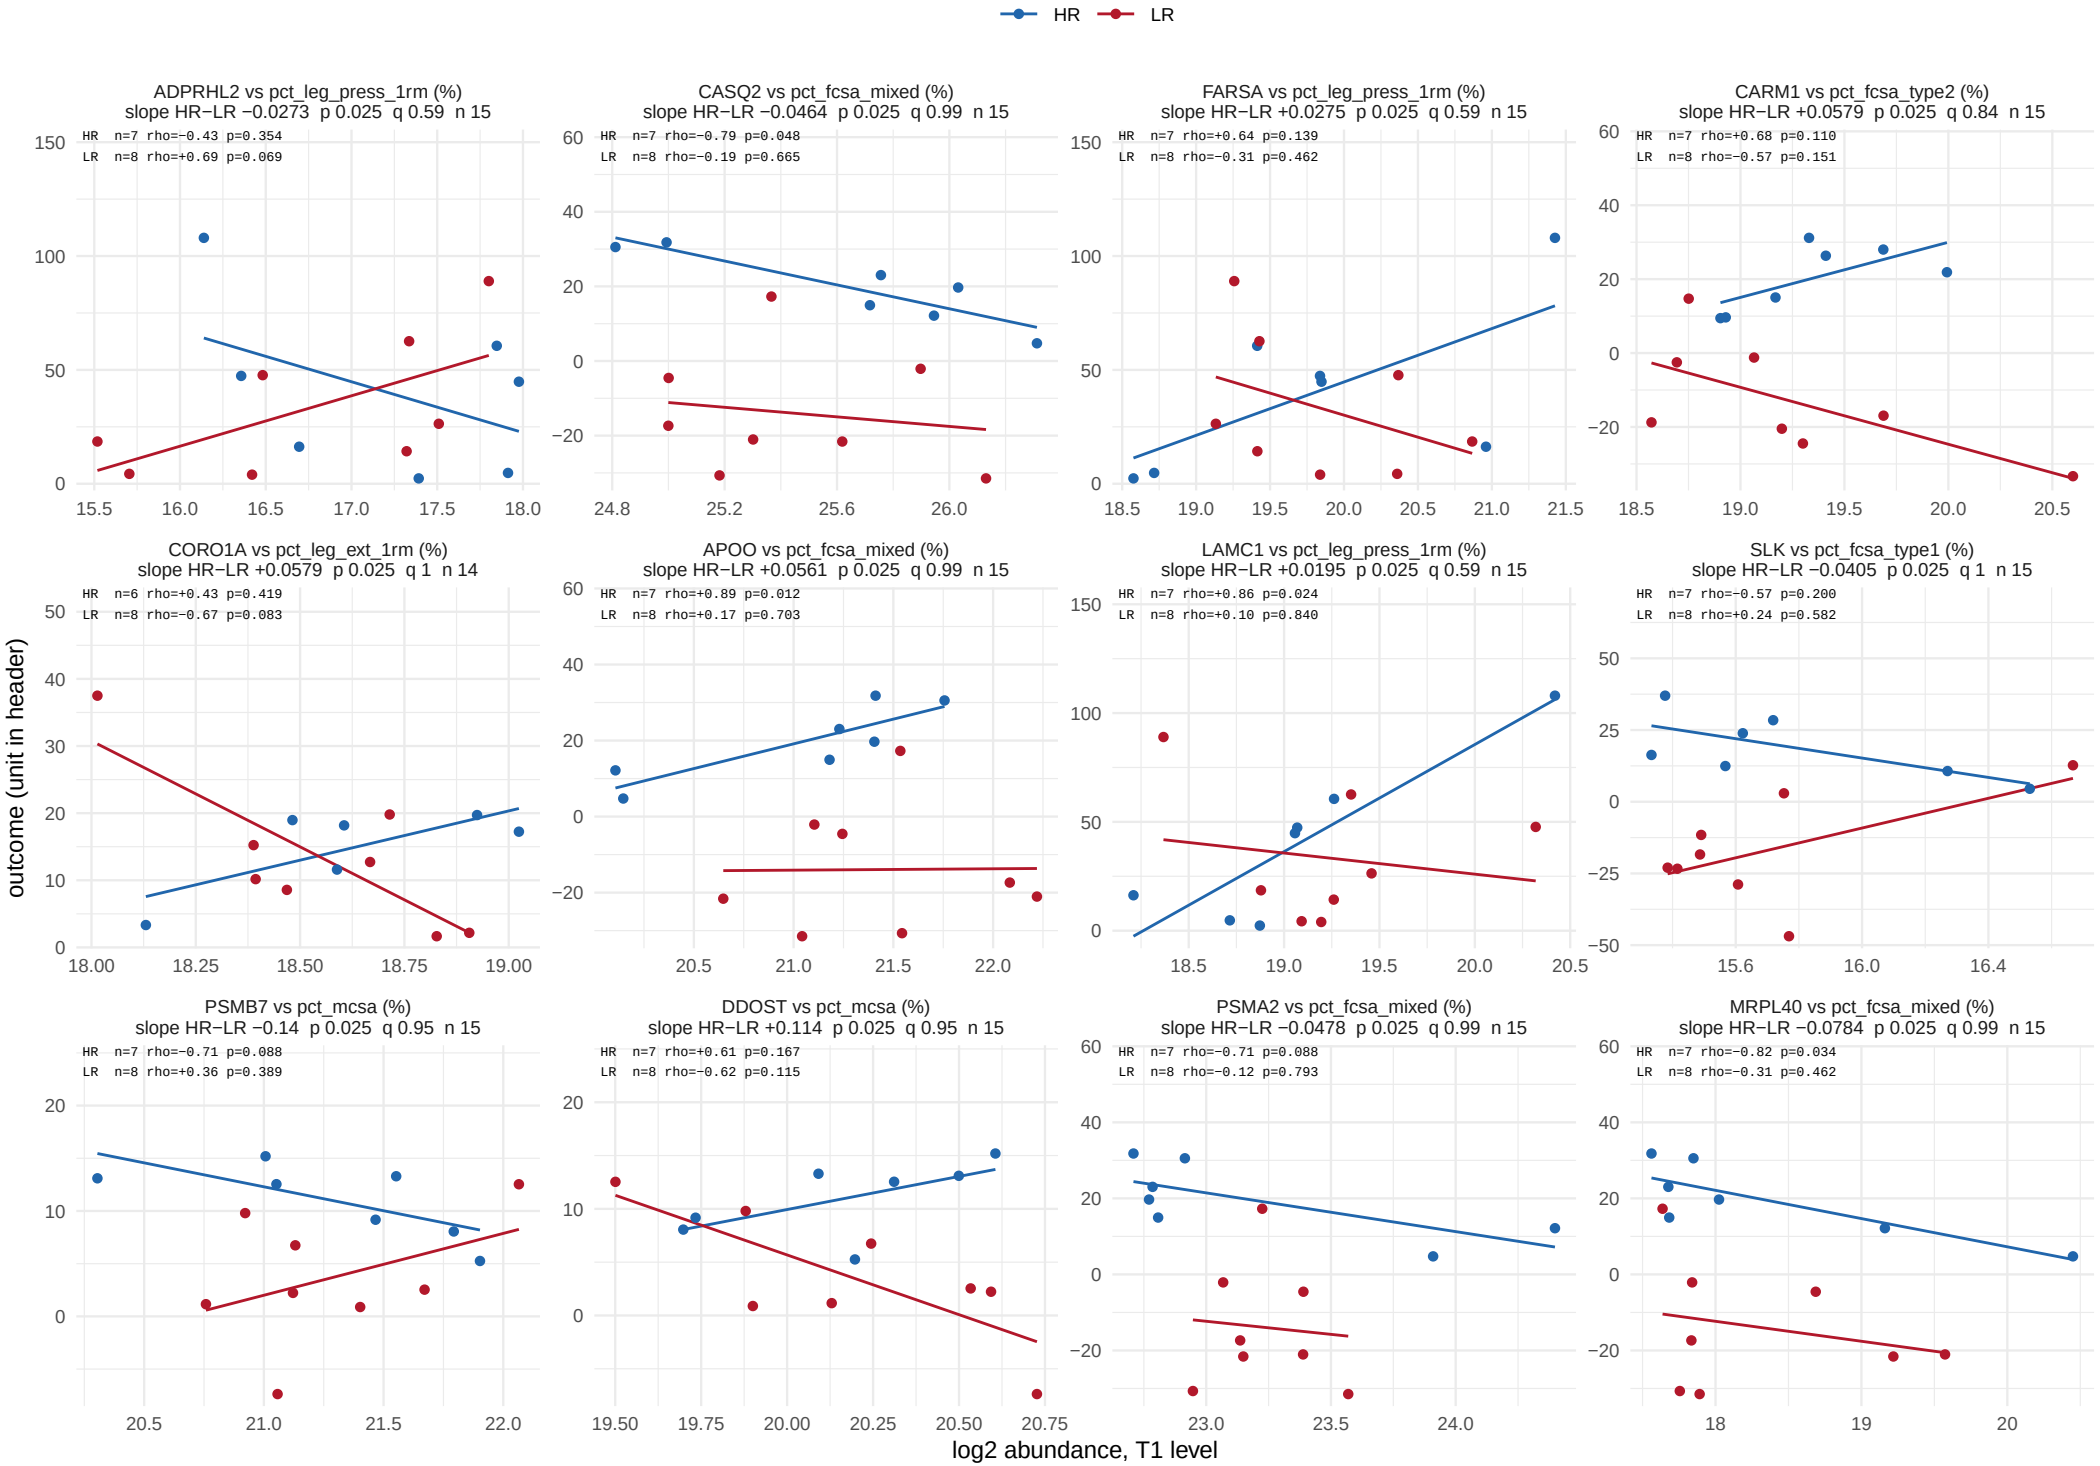

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


565 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 24 of 48.

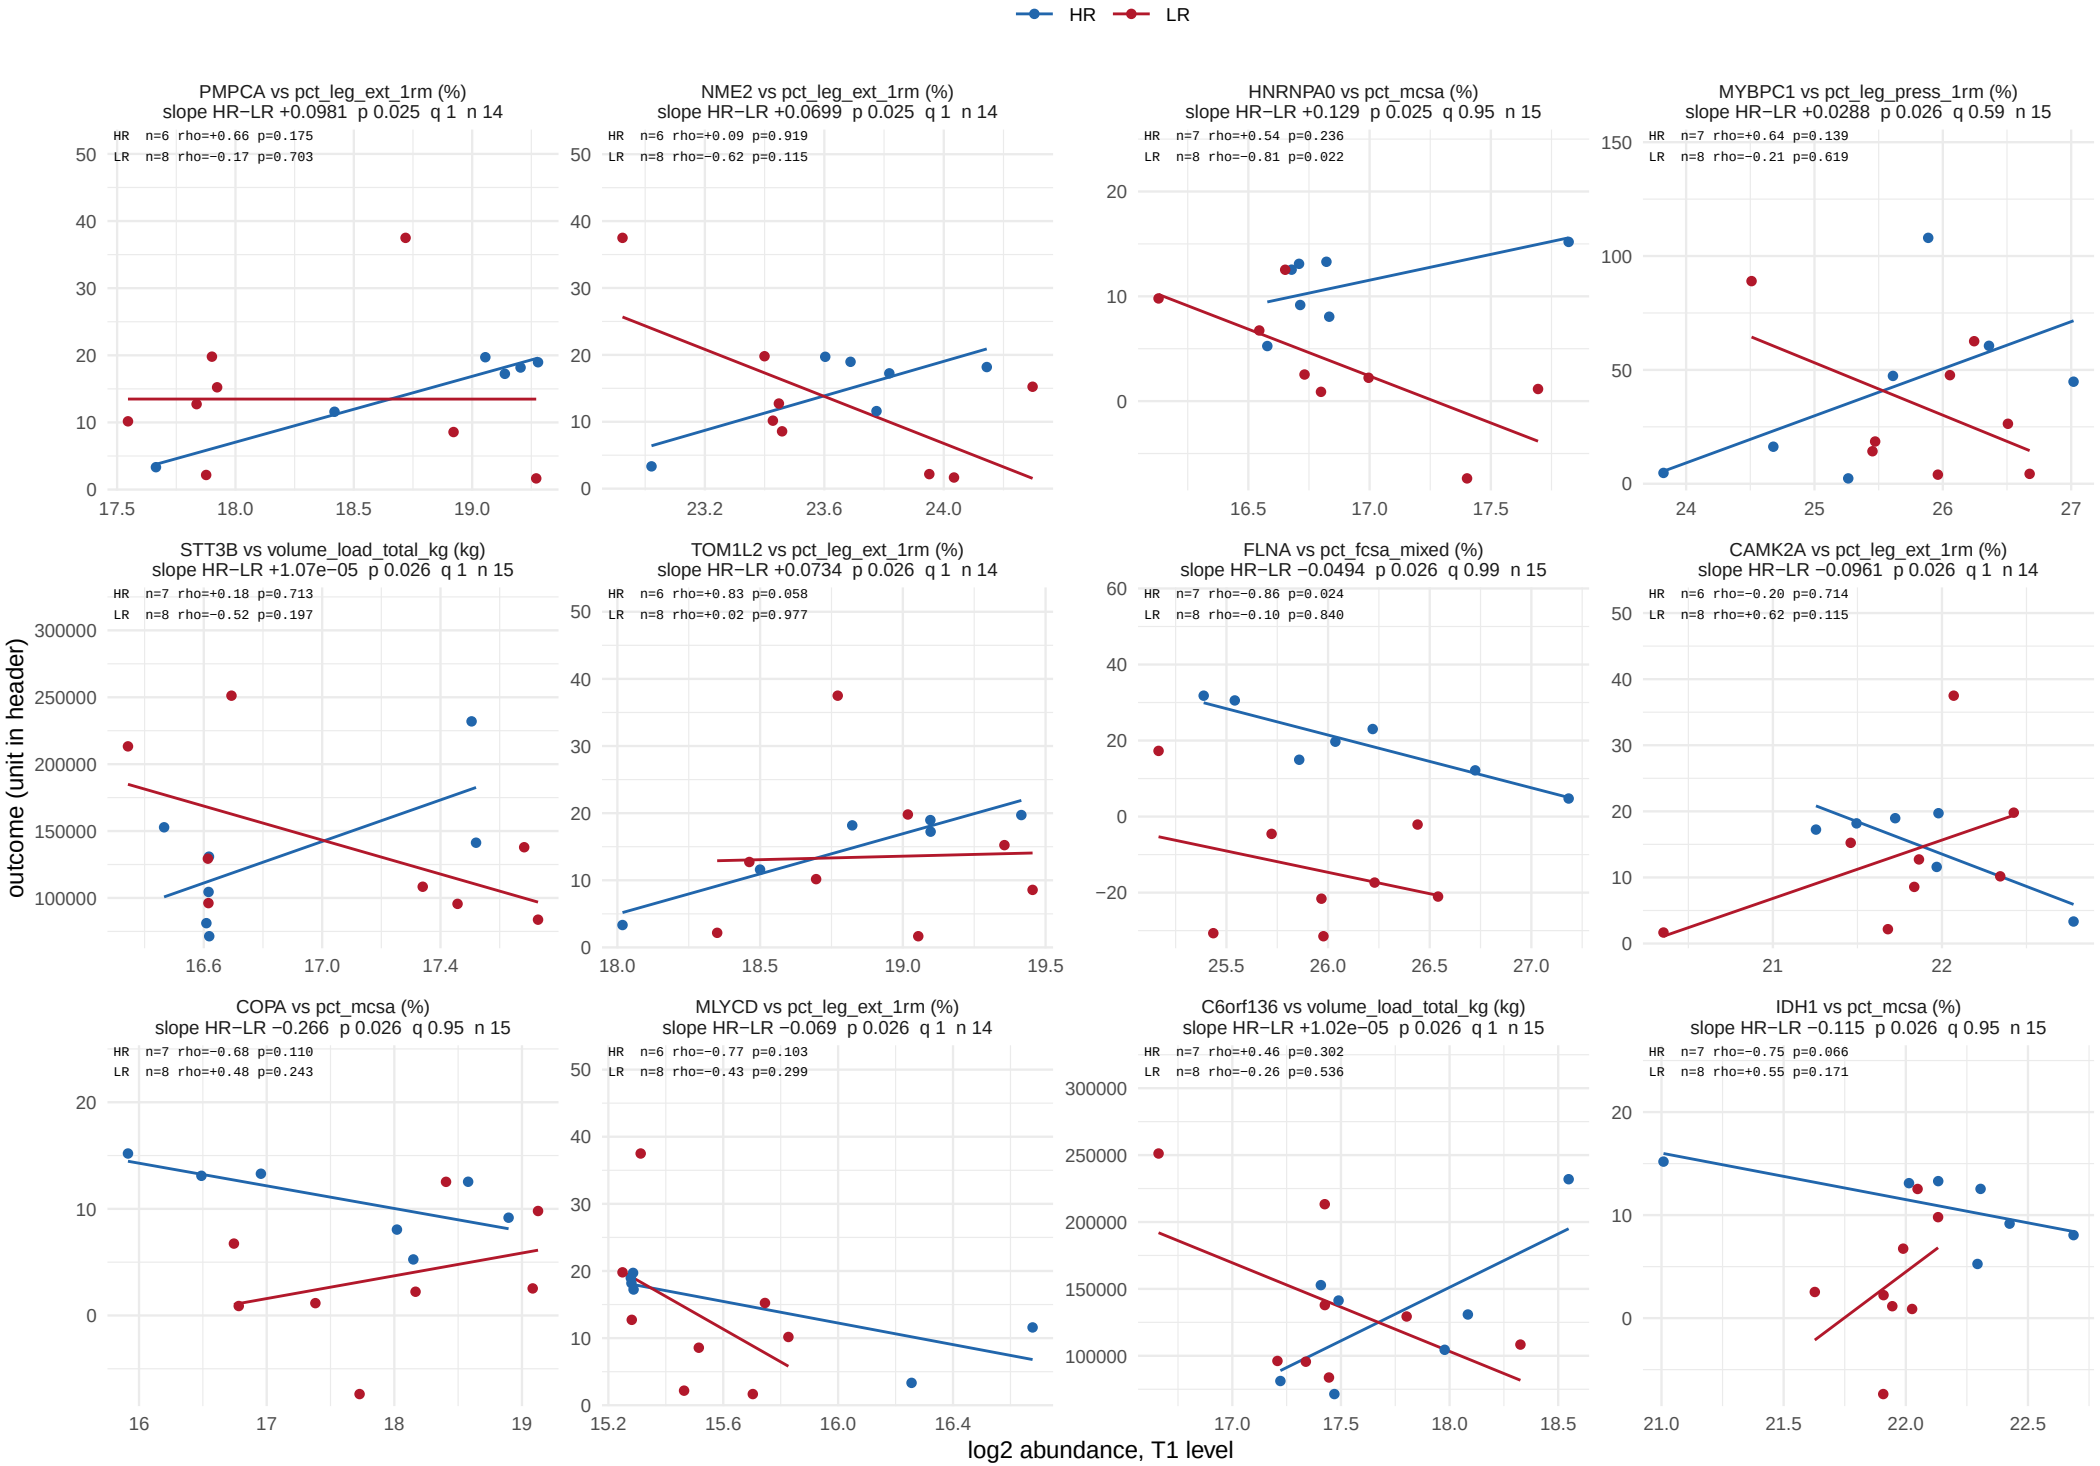

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


565 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 25 of 48.

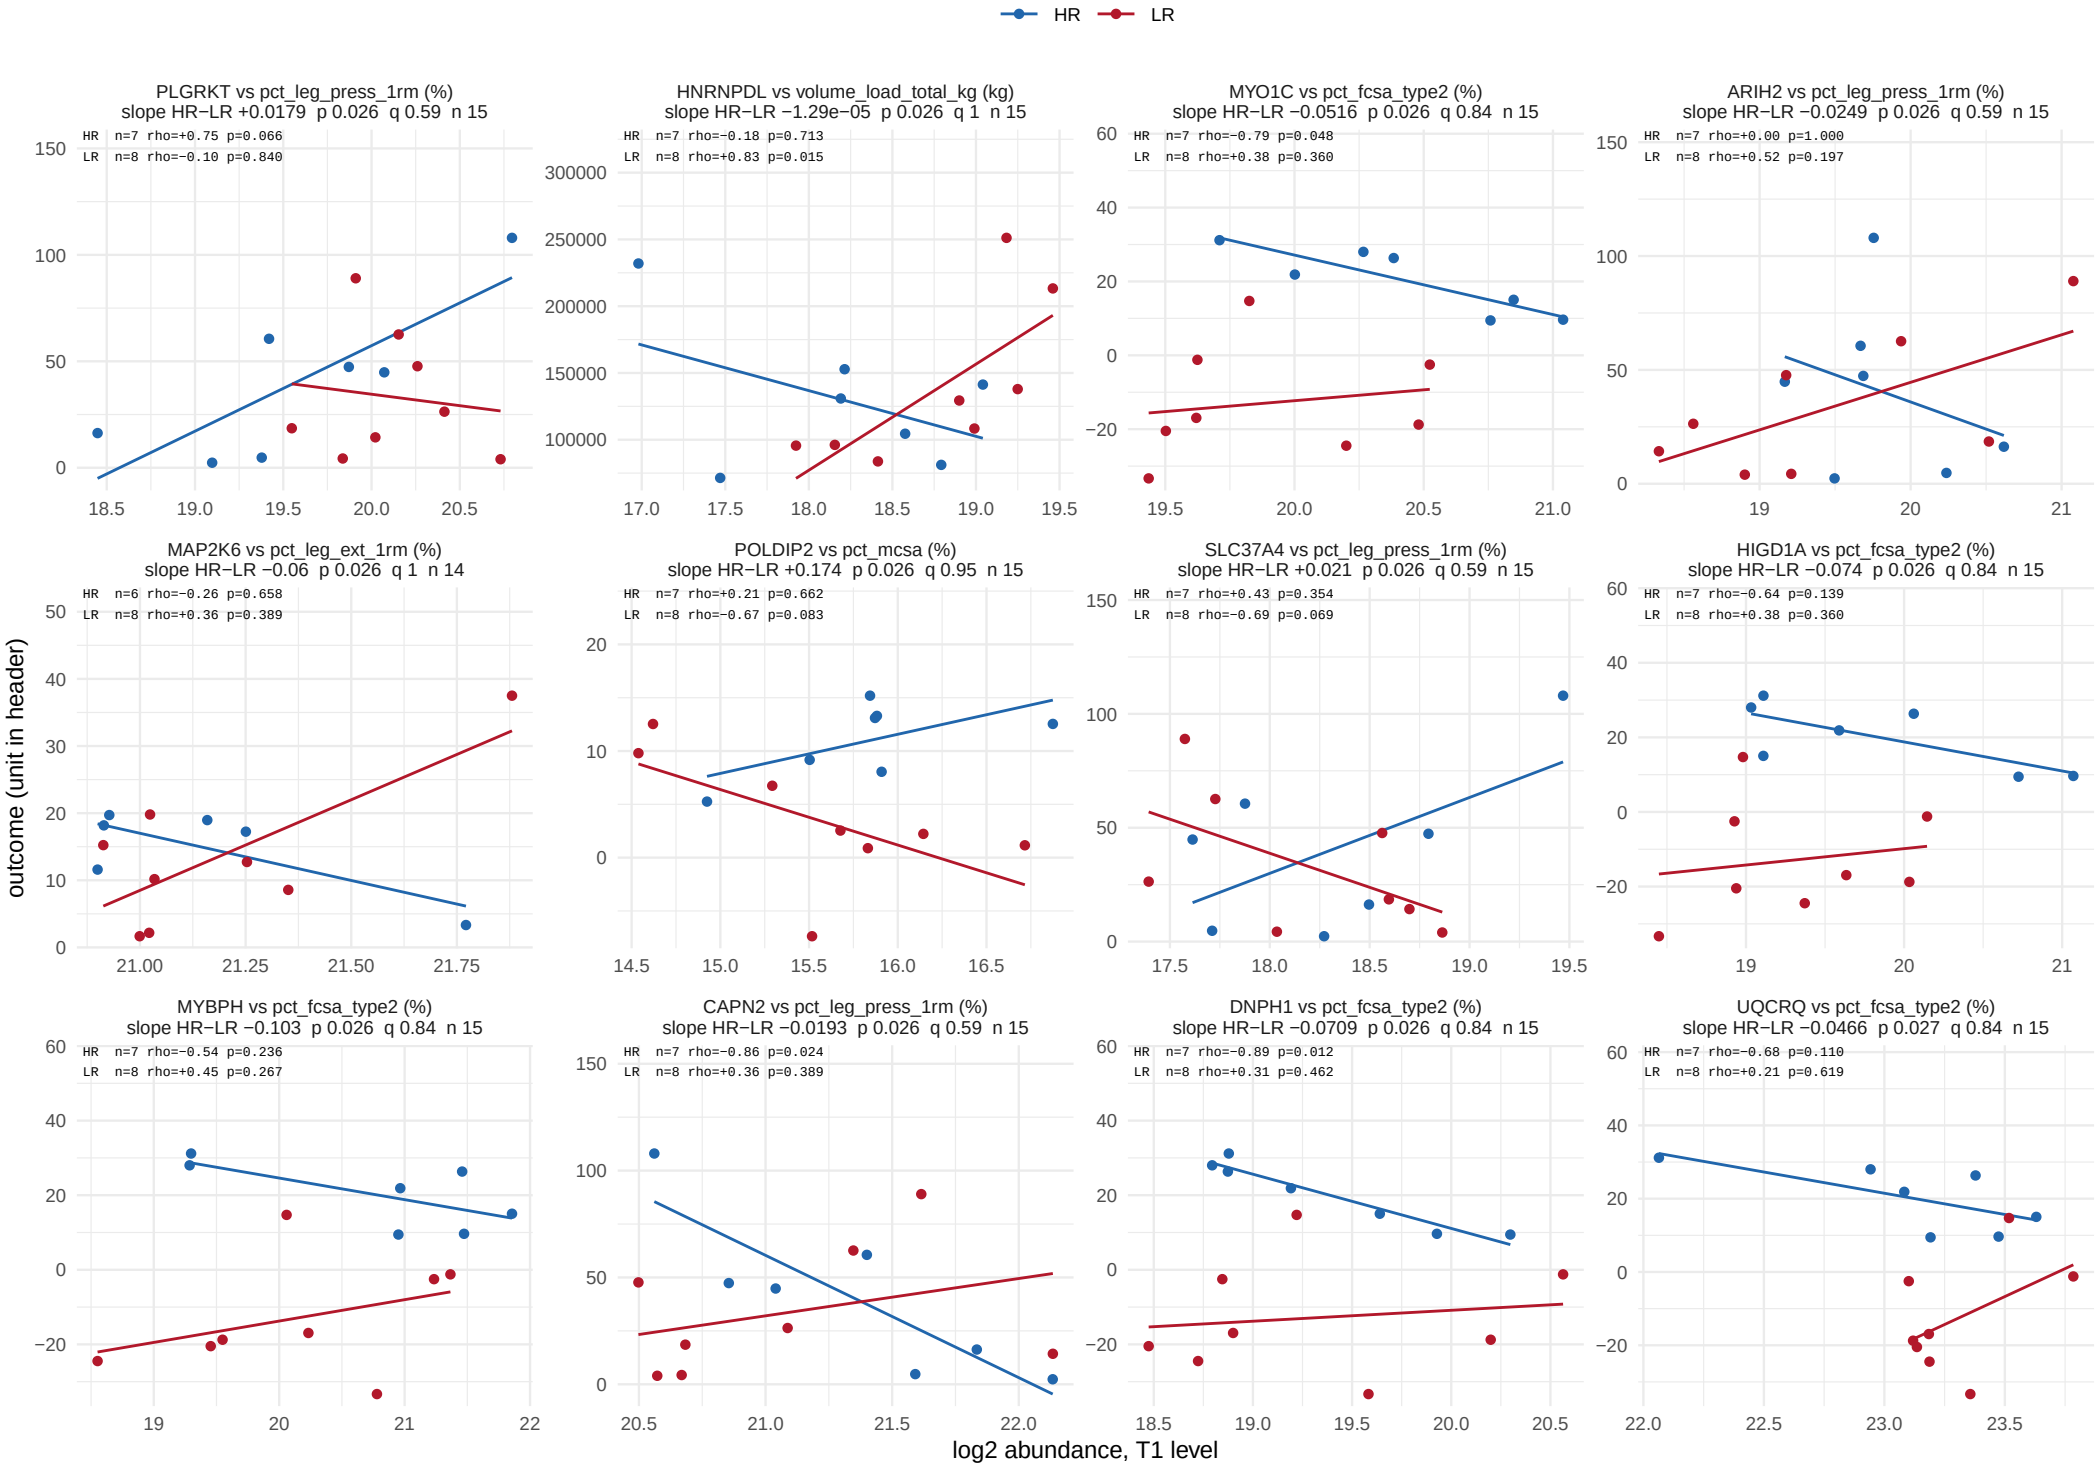

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


565 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 26 of 48.

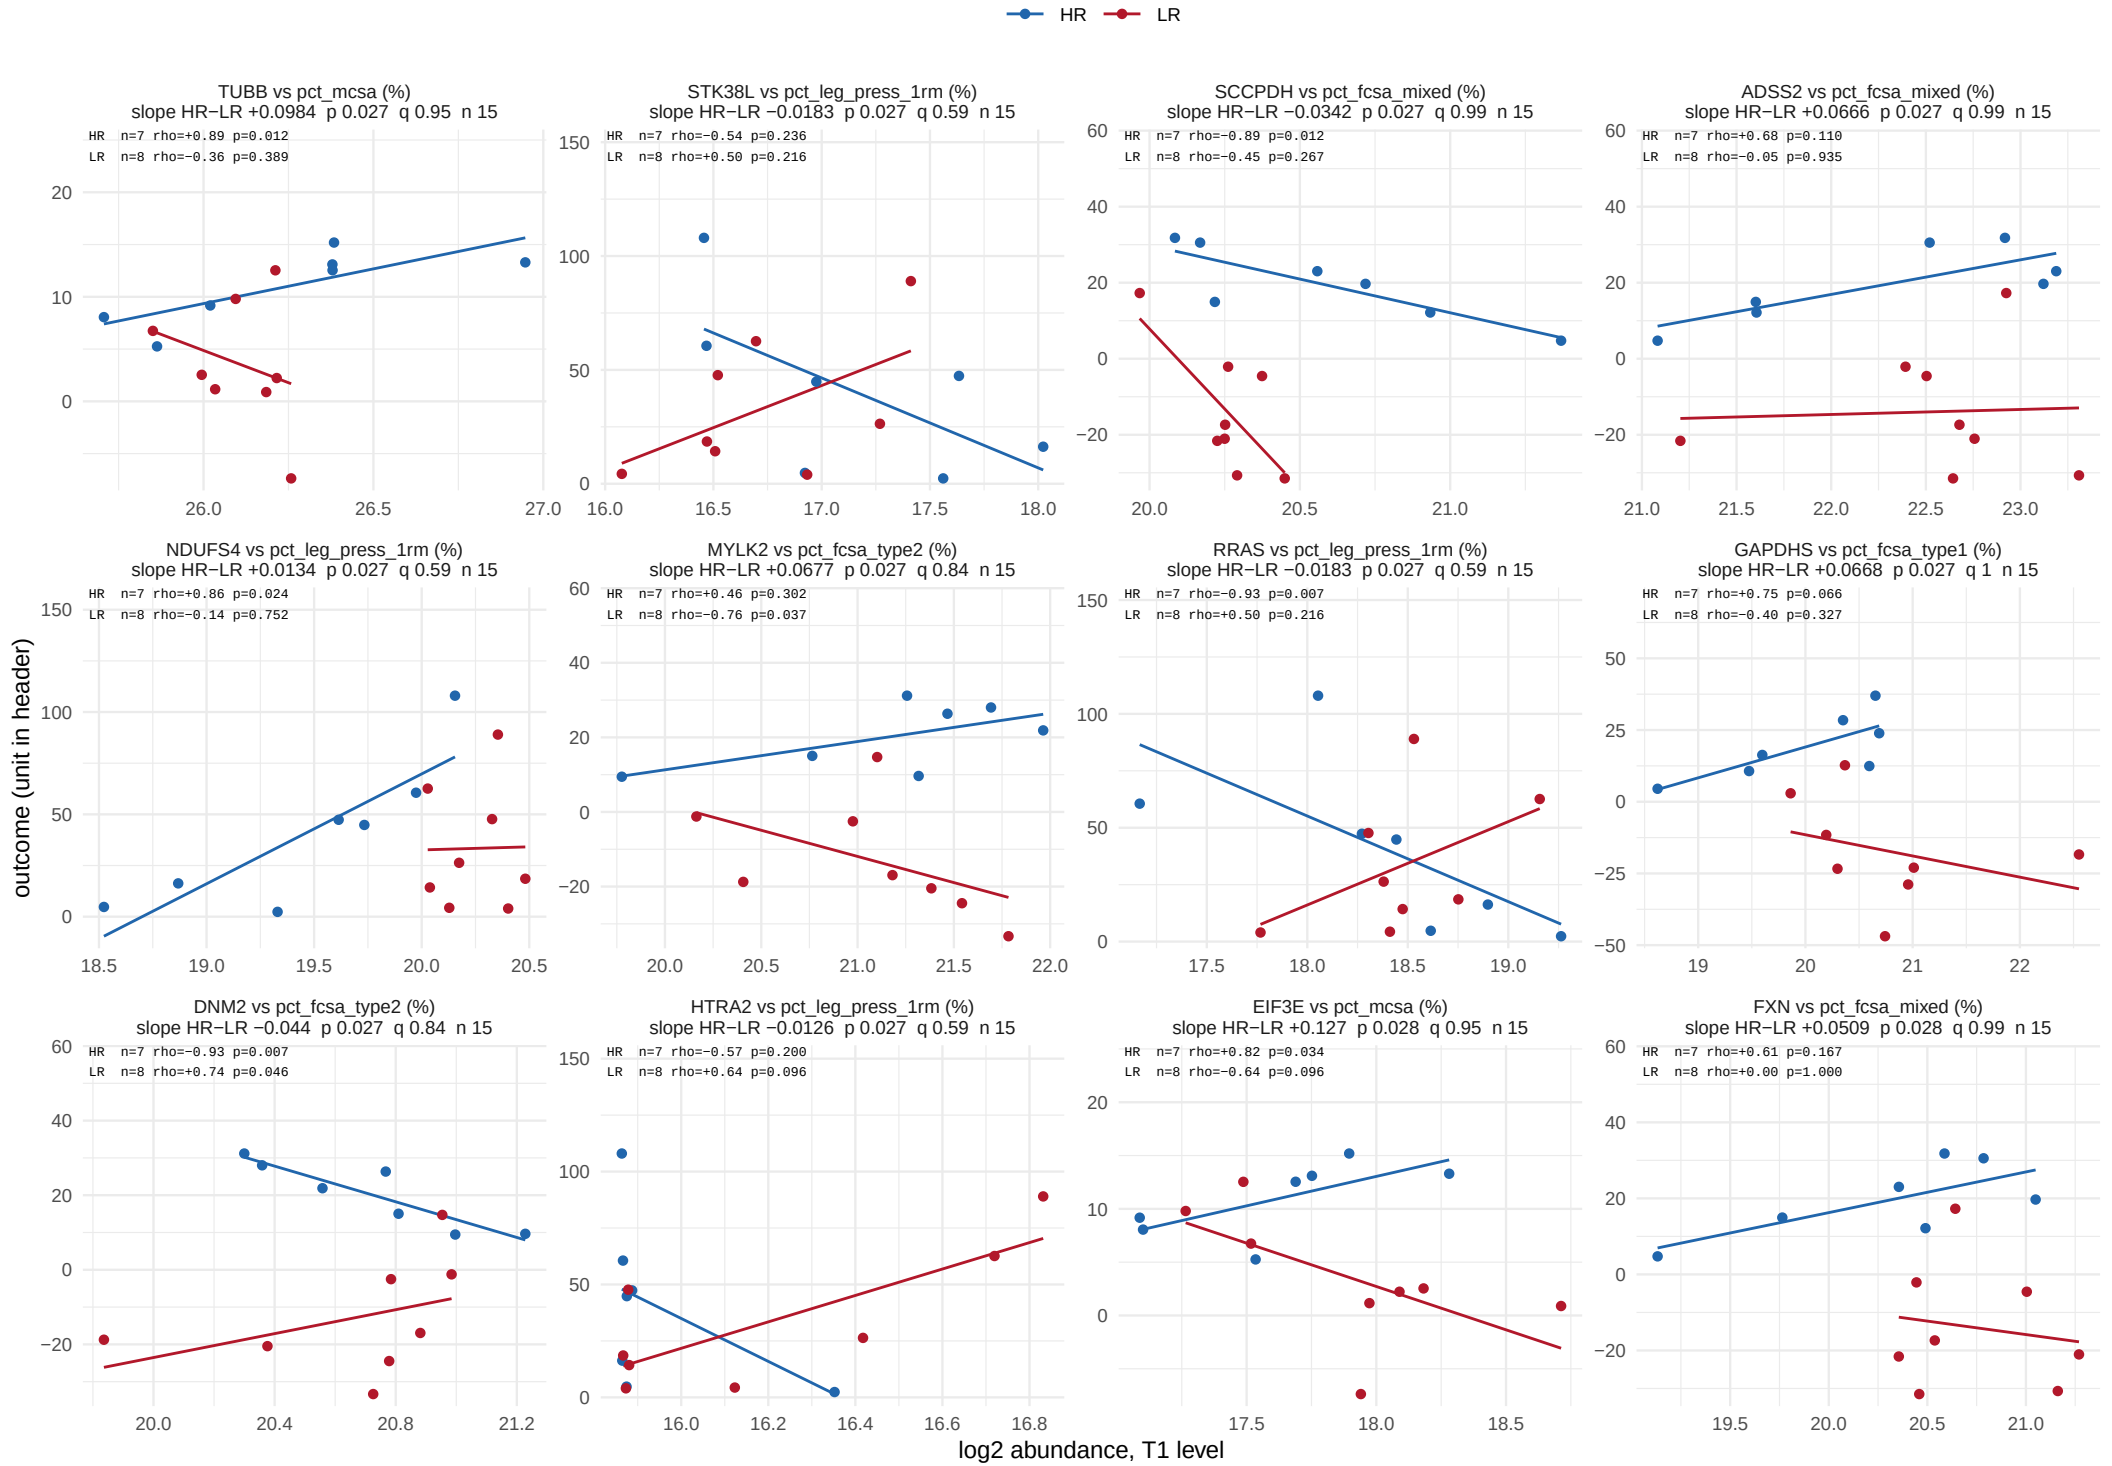

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


565 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 27 of 48.

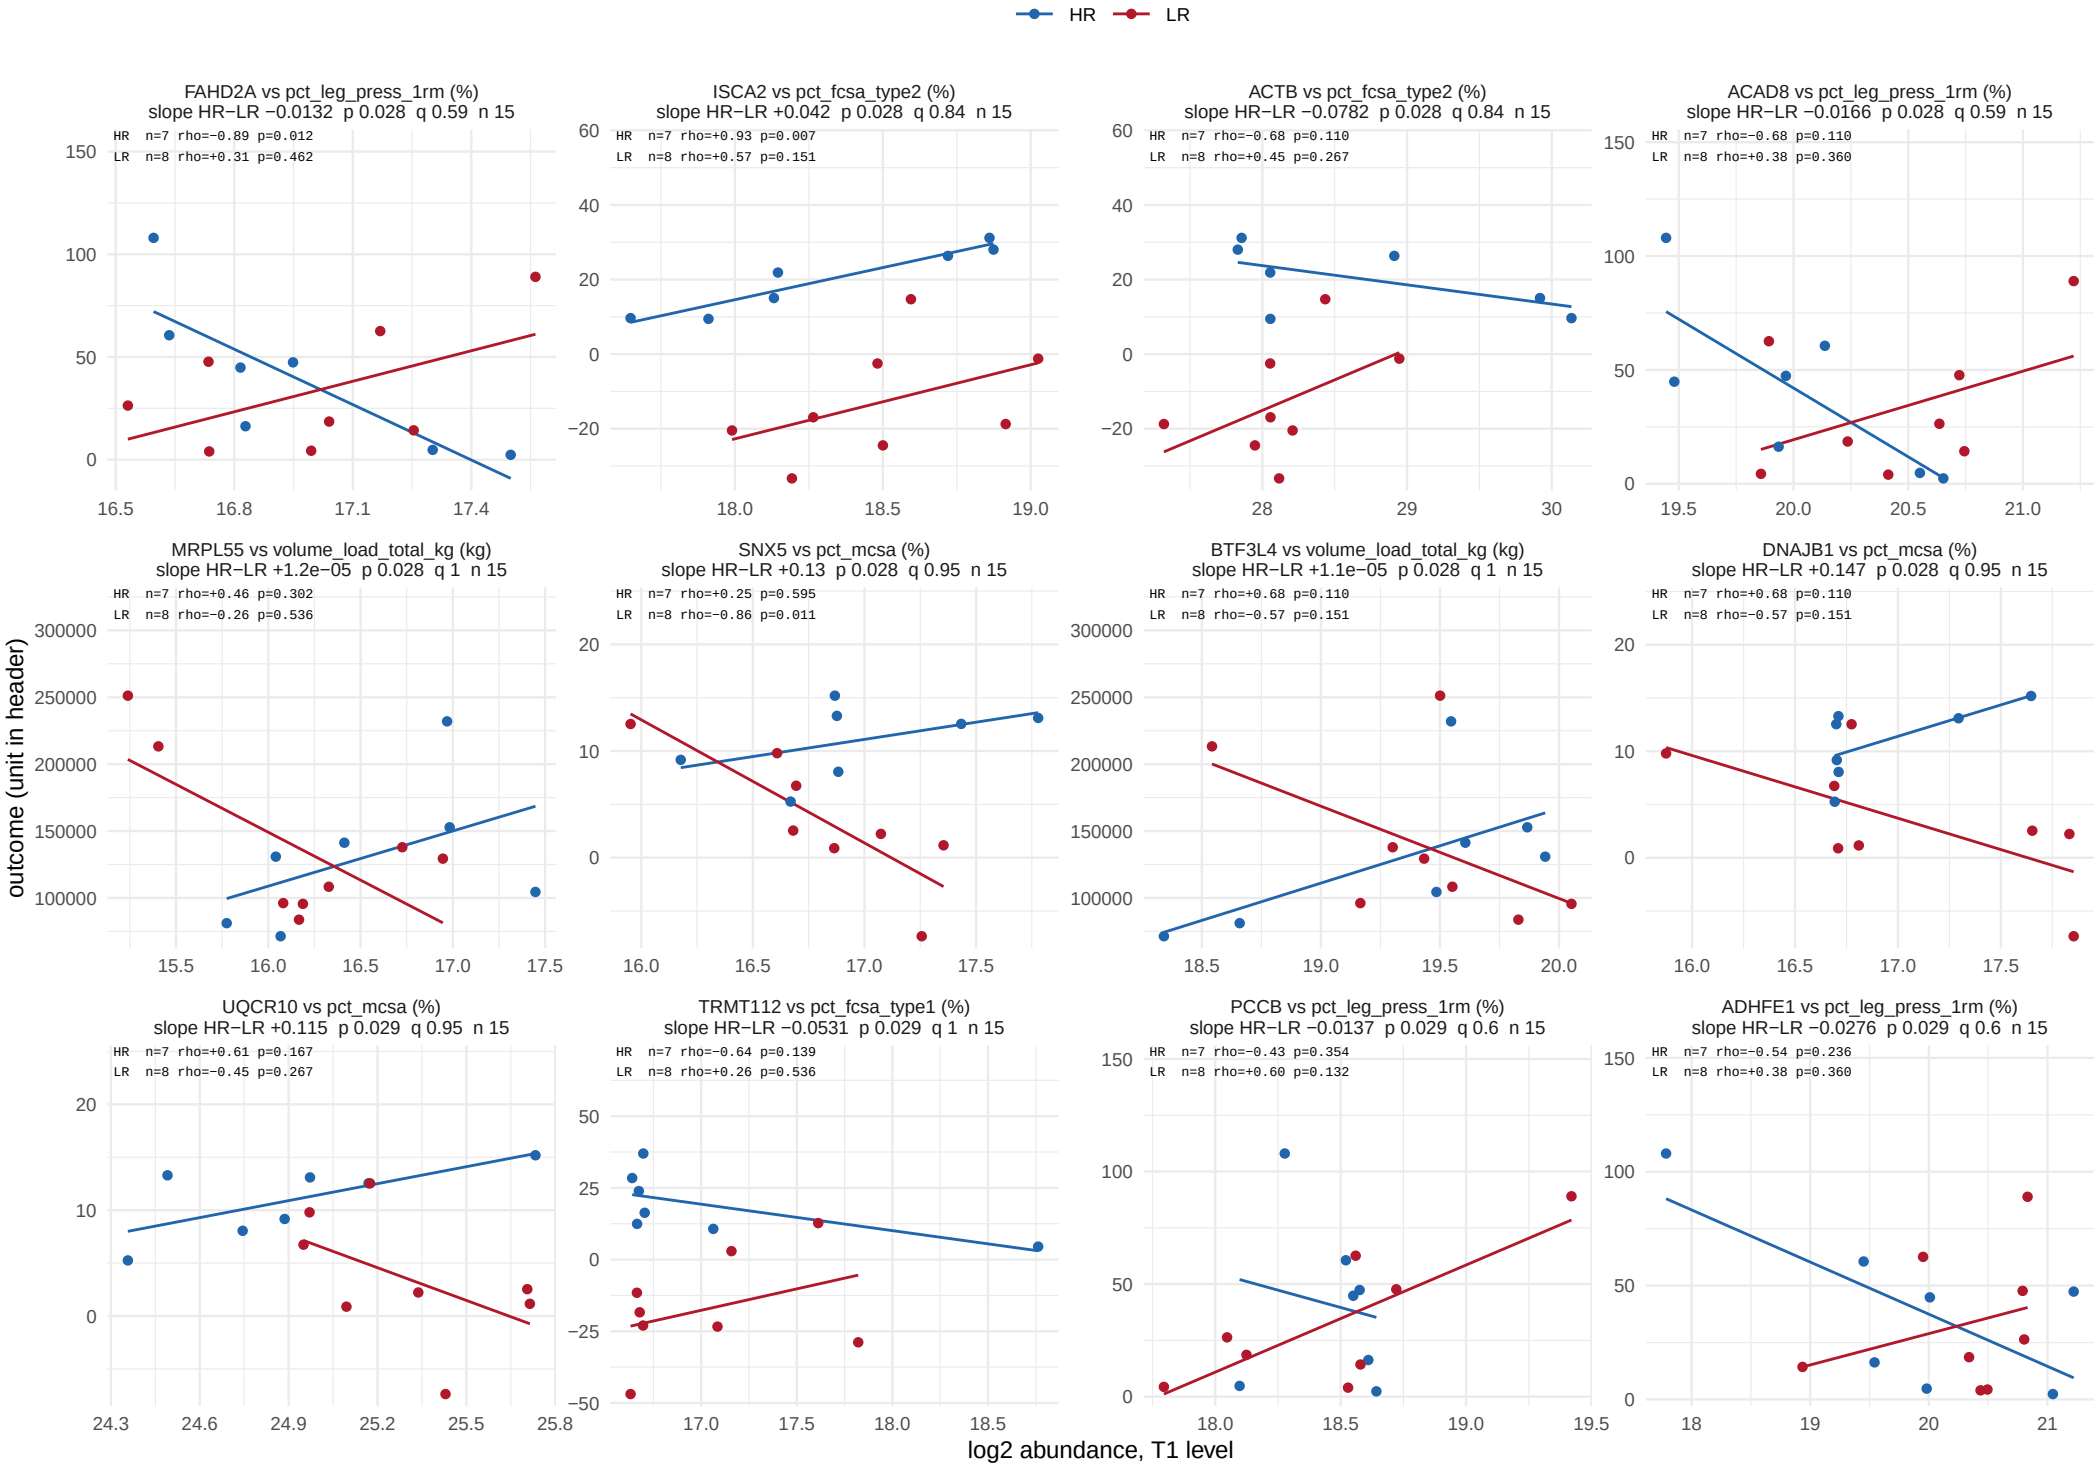

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


565 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 28 of 48.

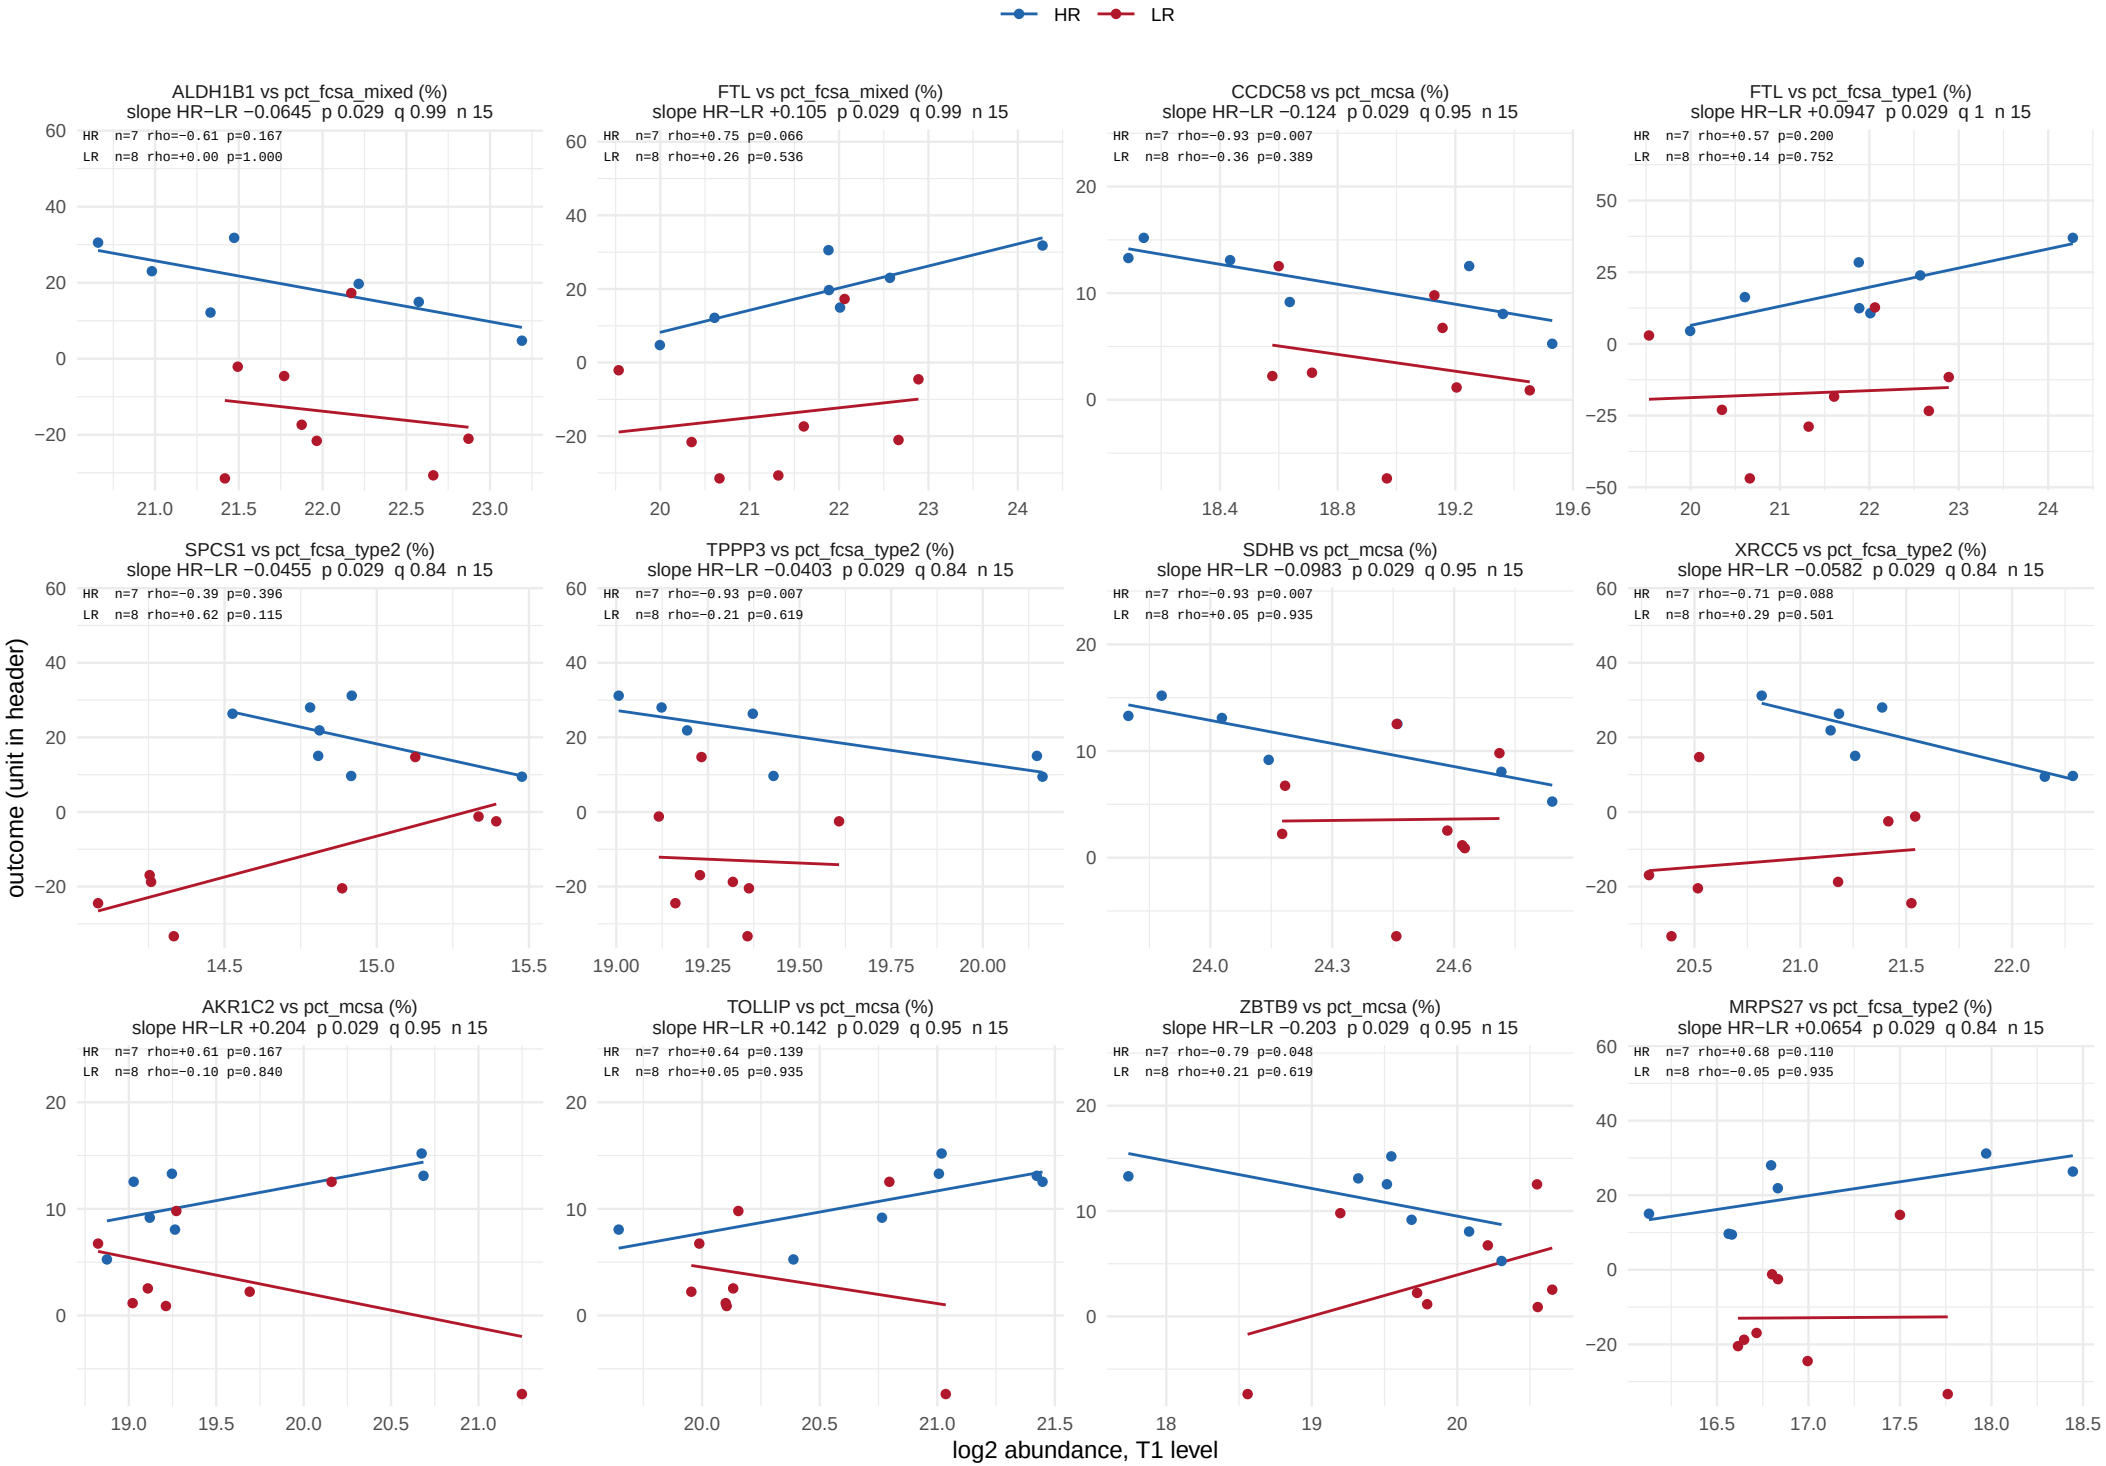

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


565 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 29 of 48.

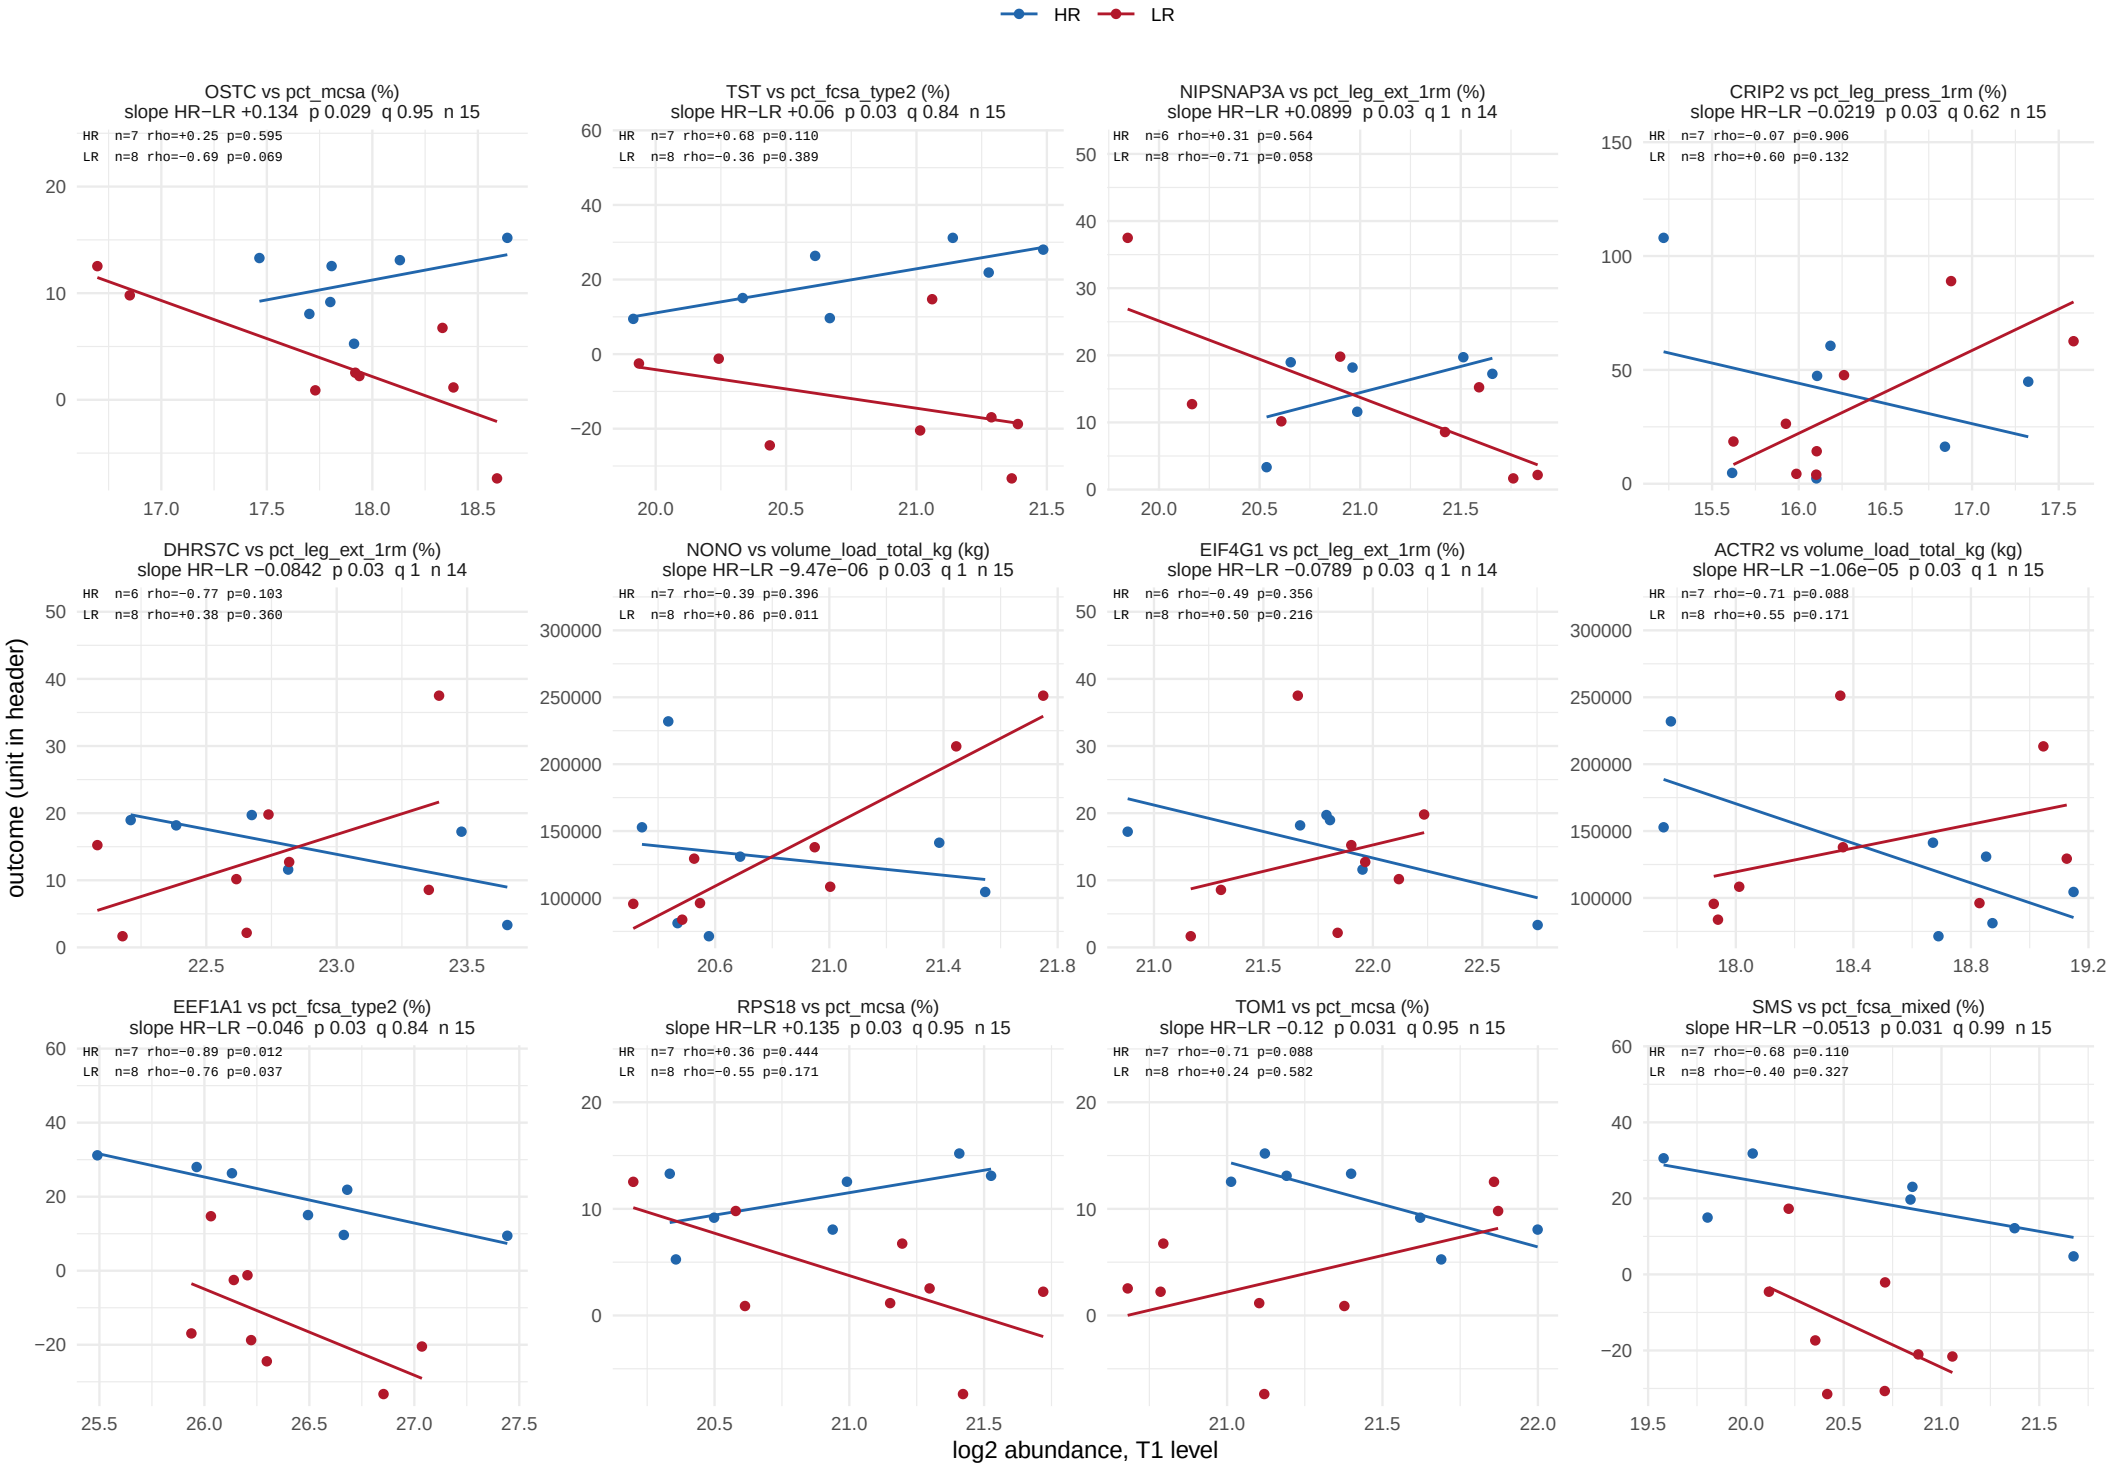

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window

565 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 30 of 48.

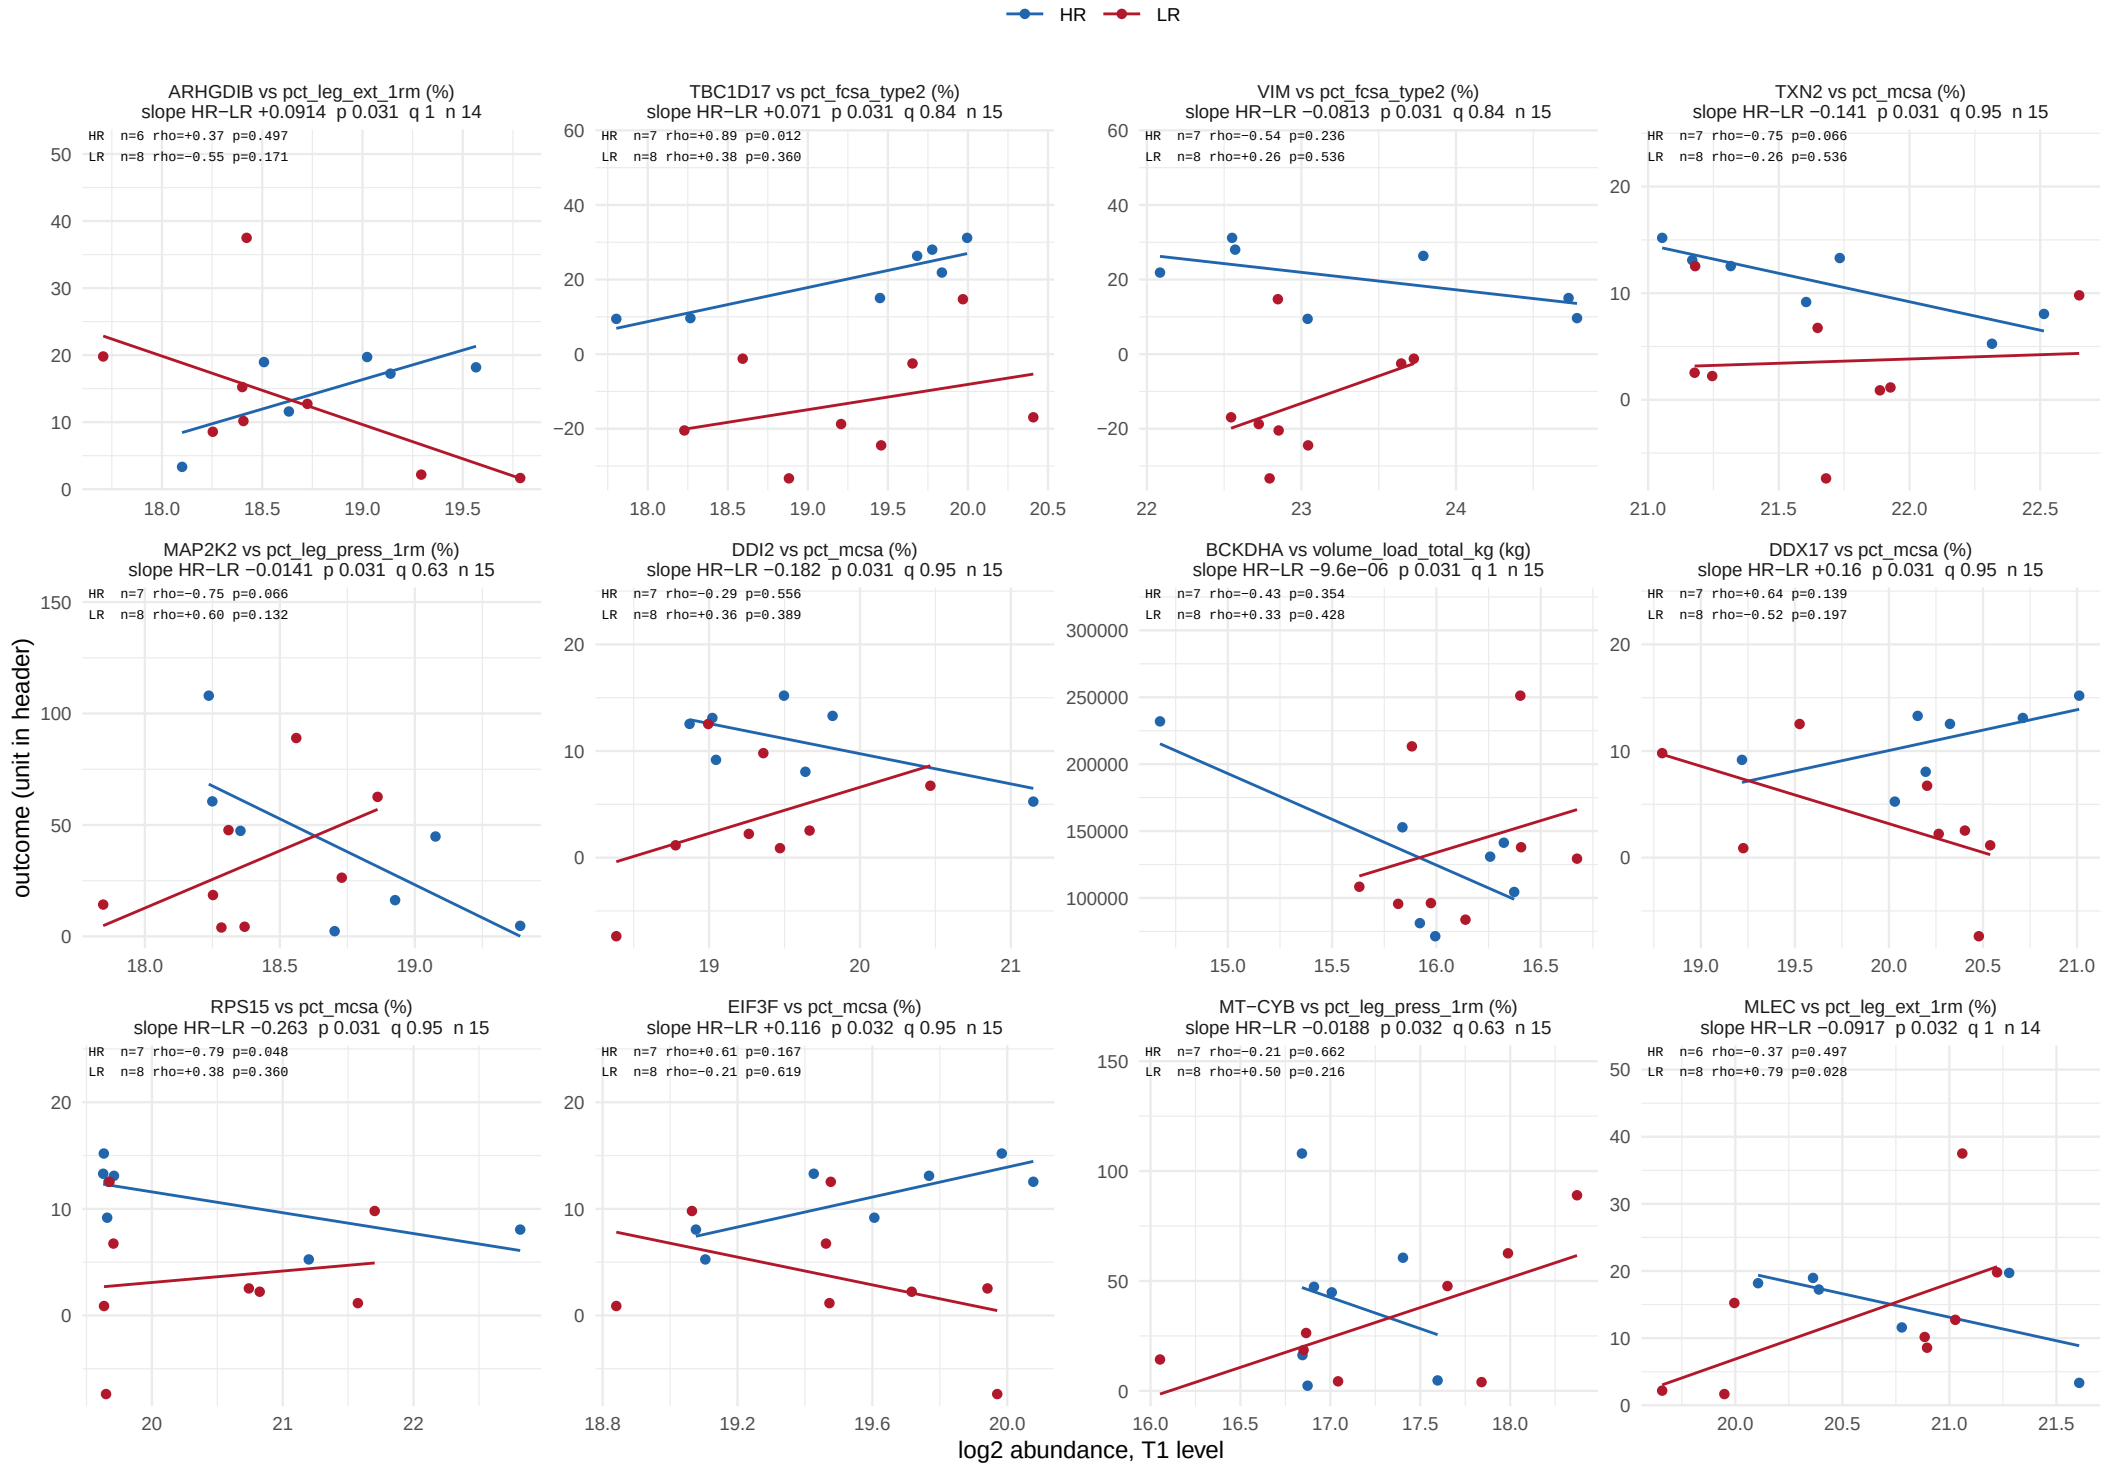

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


565 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 31 of 48.



One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


565 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 32 of 48.

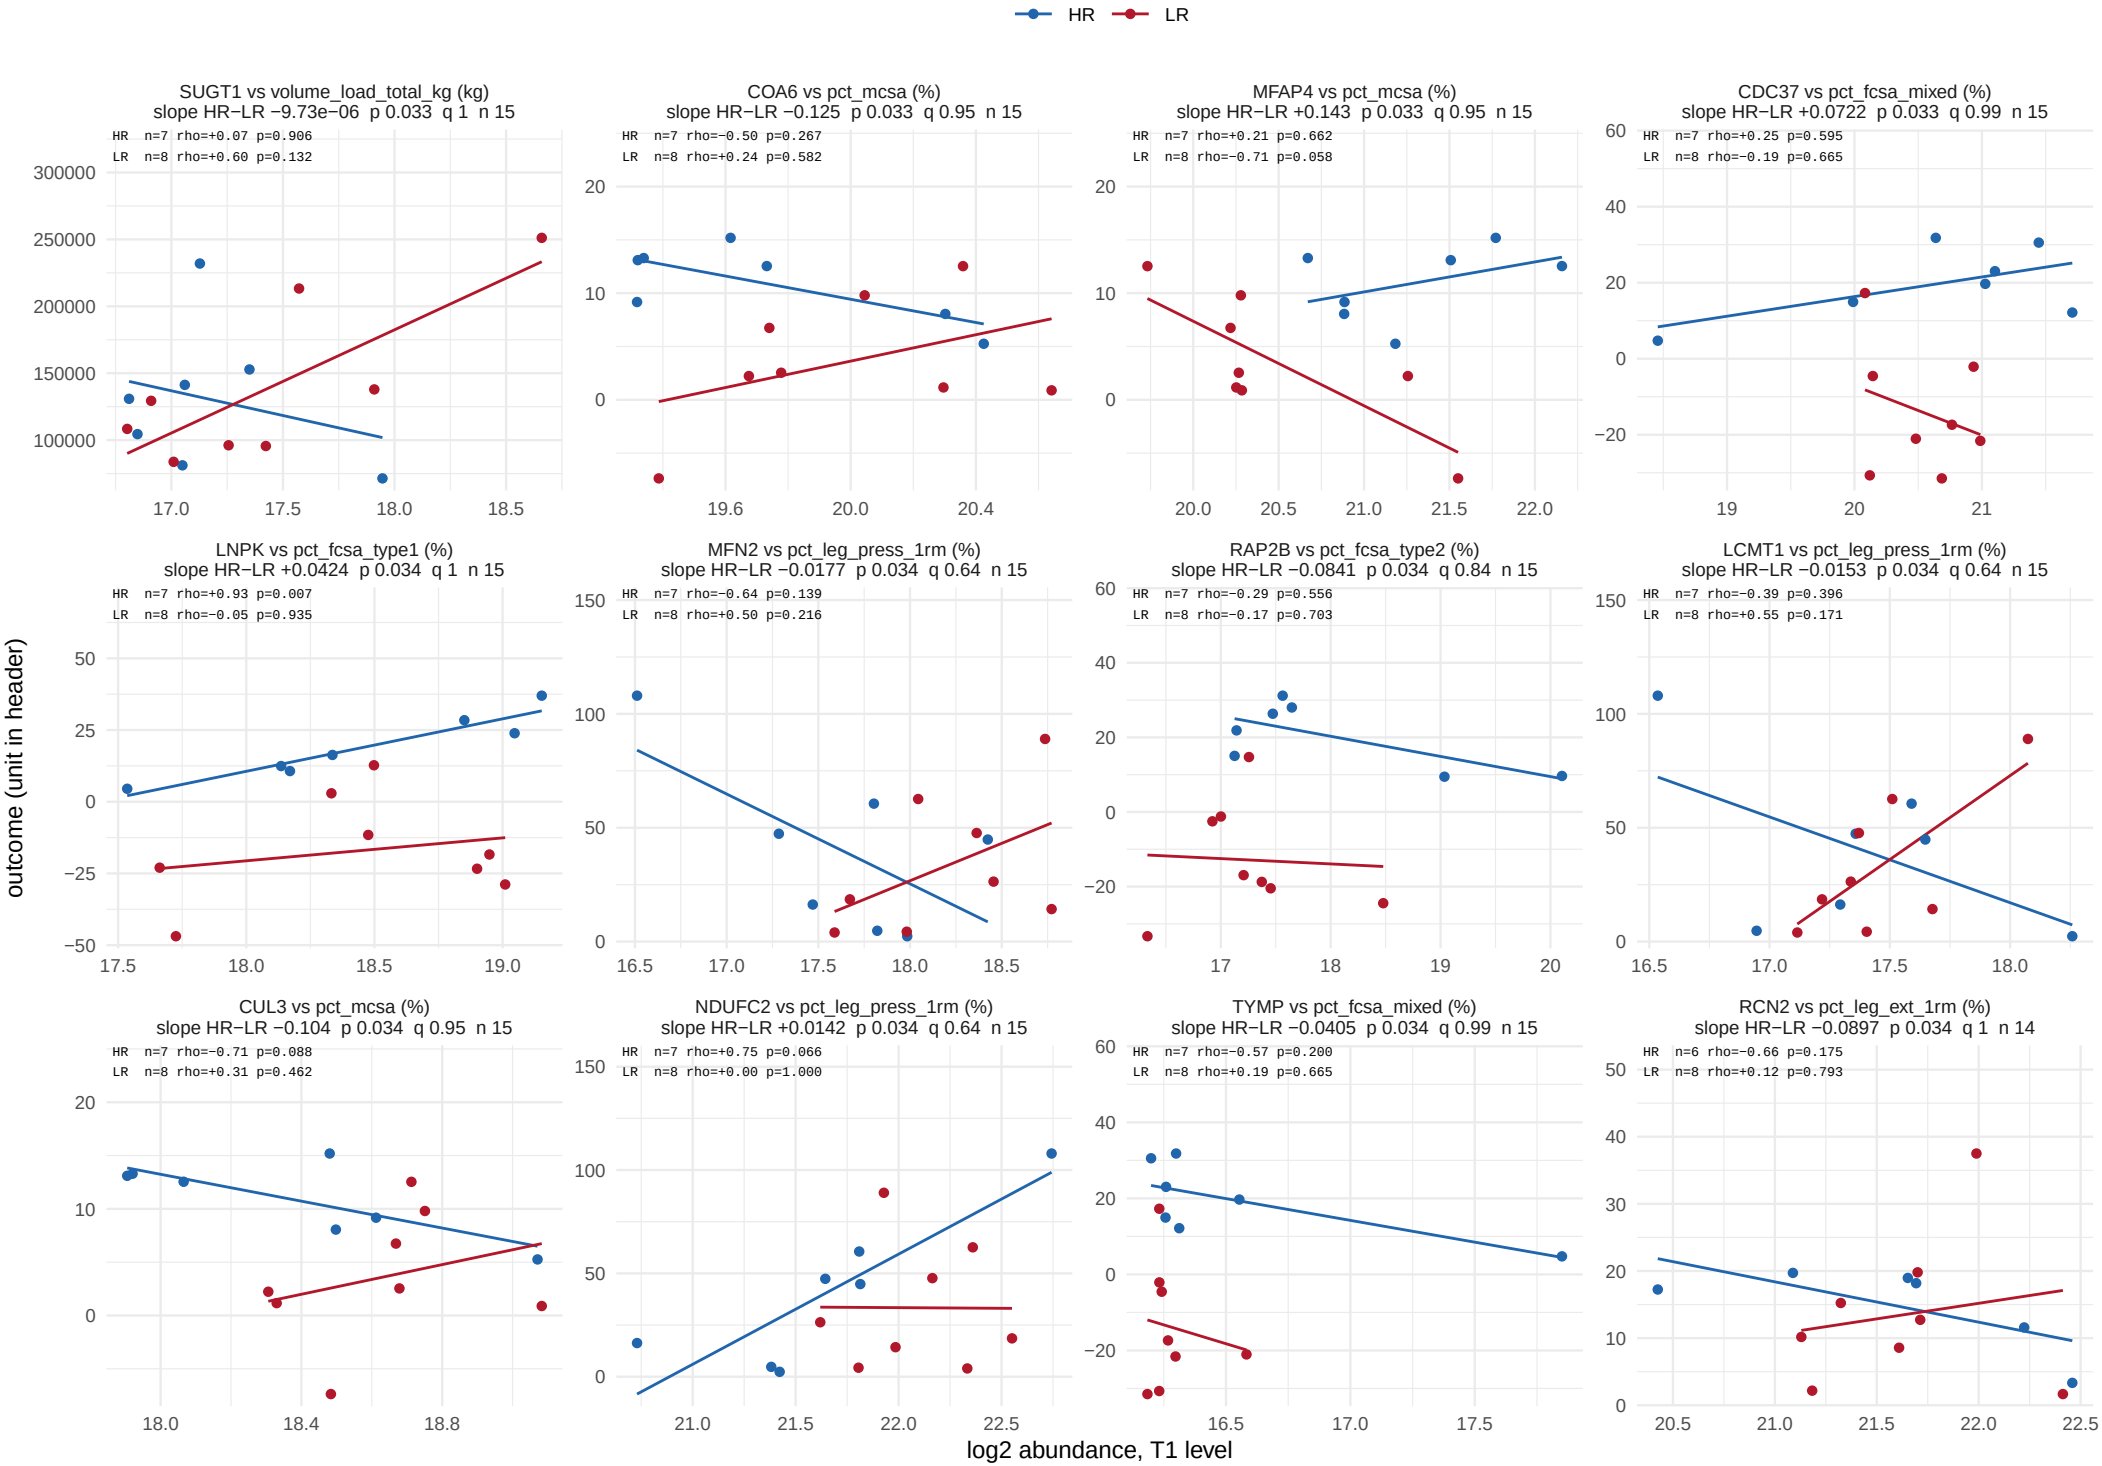

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


565 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 33 of 48.

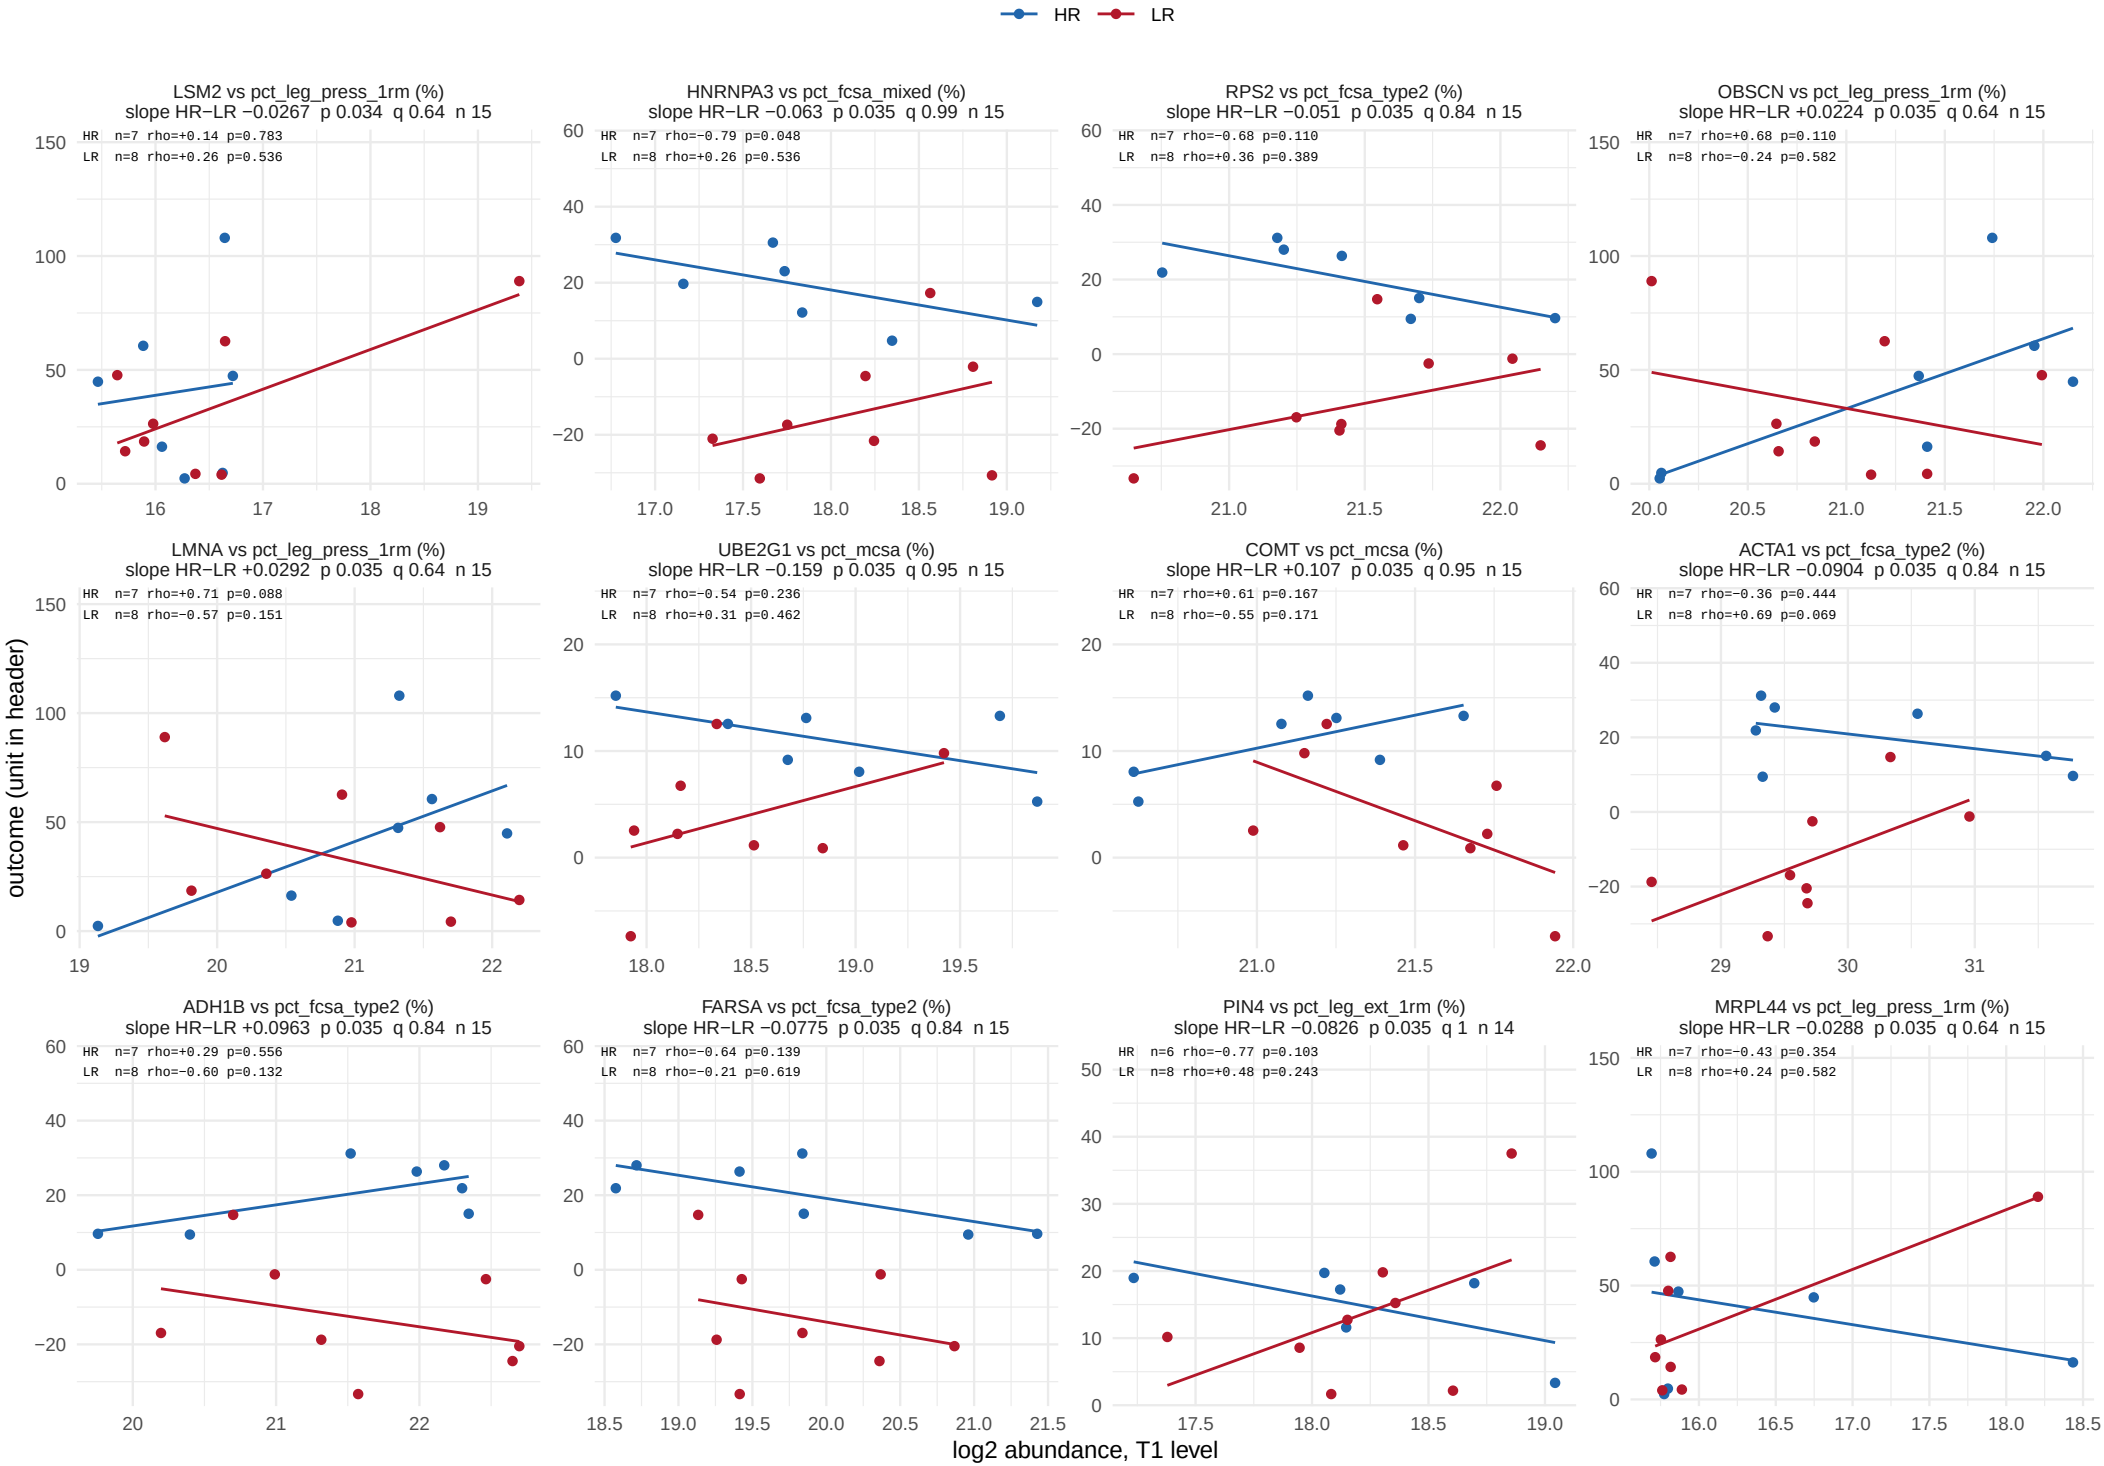

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


565 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 34 of 48.

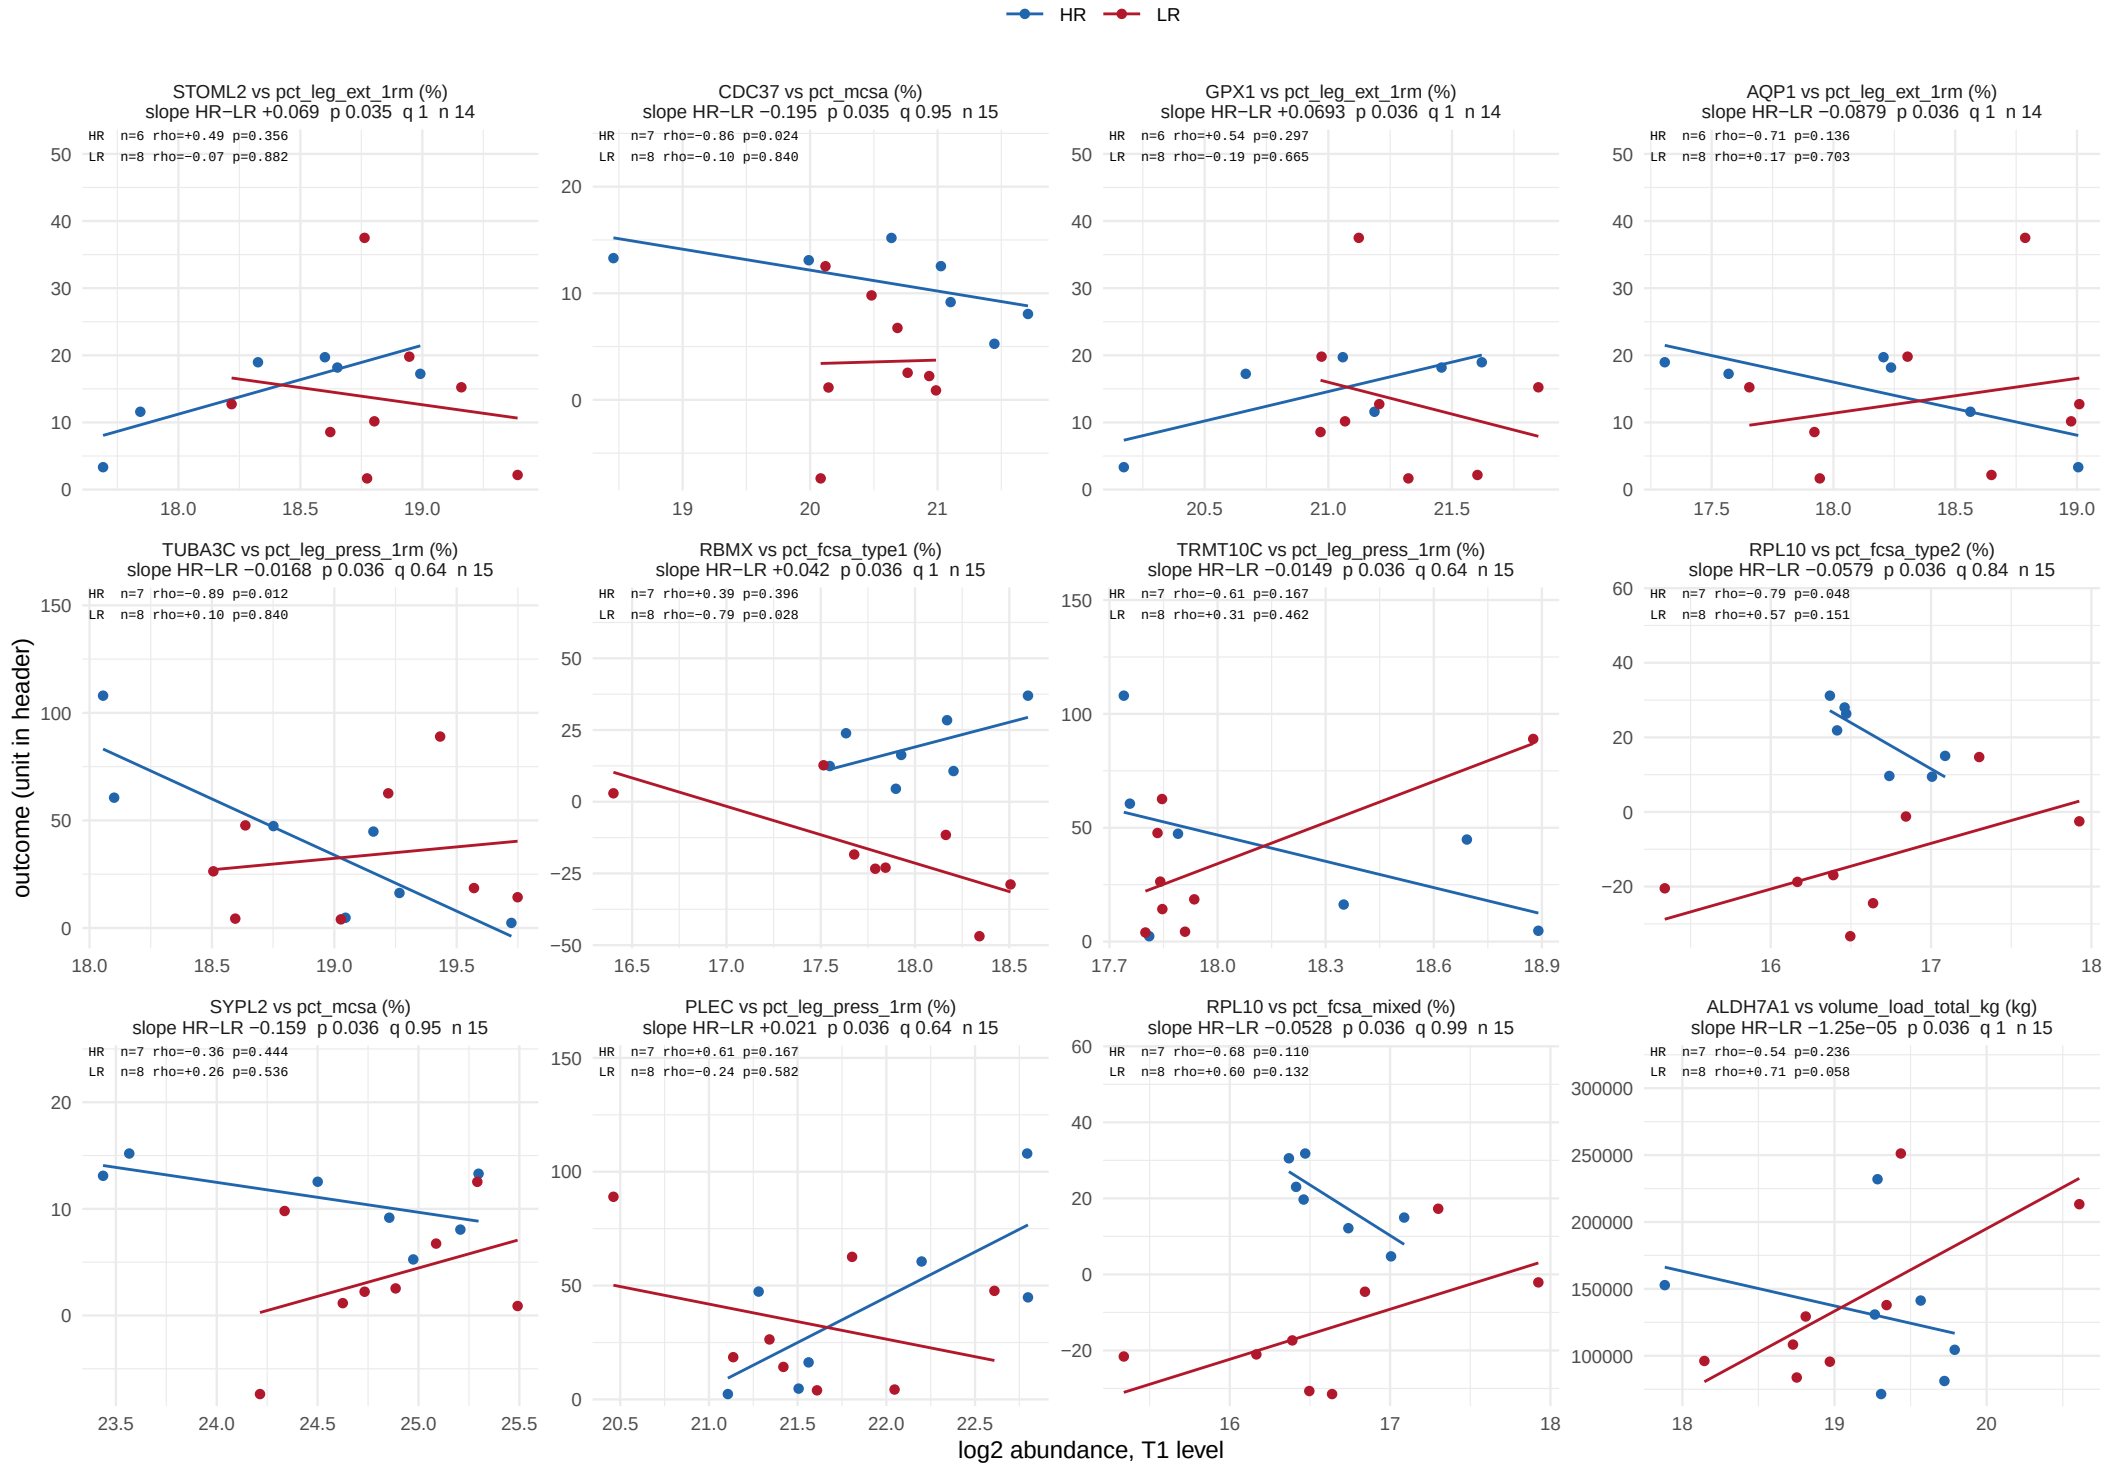

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


565 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 35 of 48.

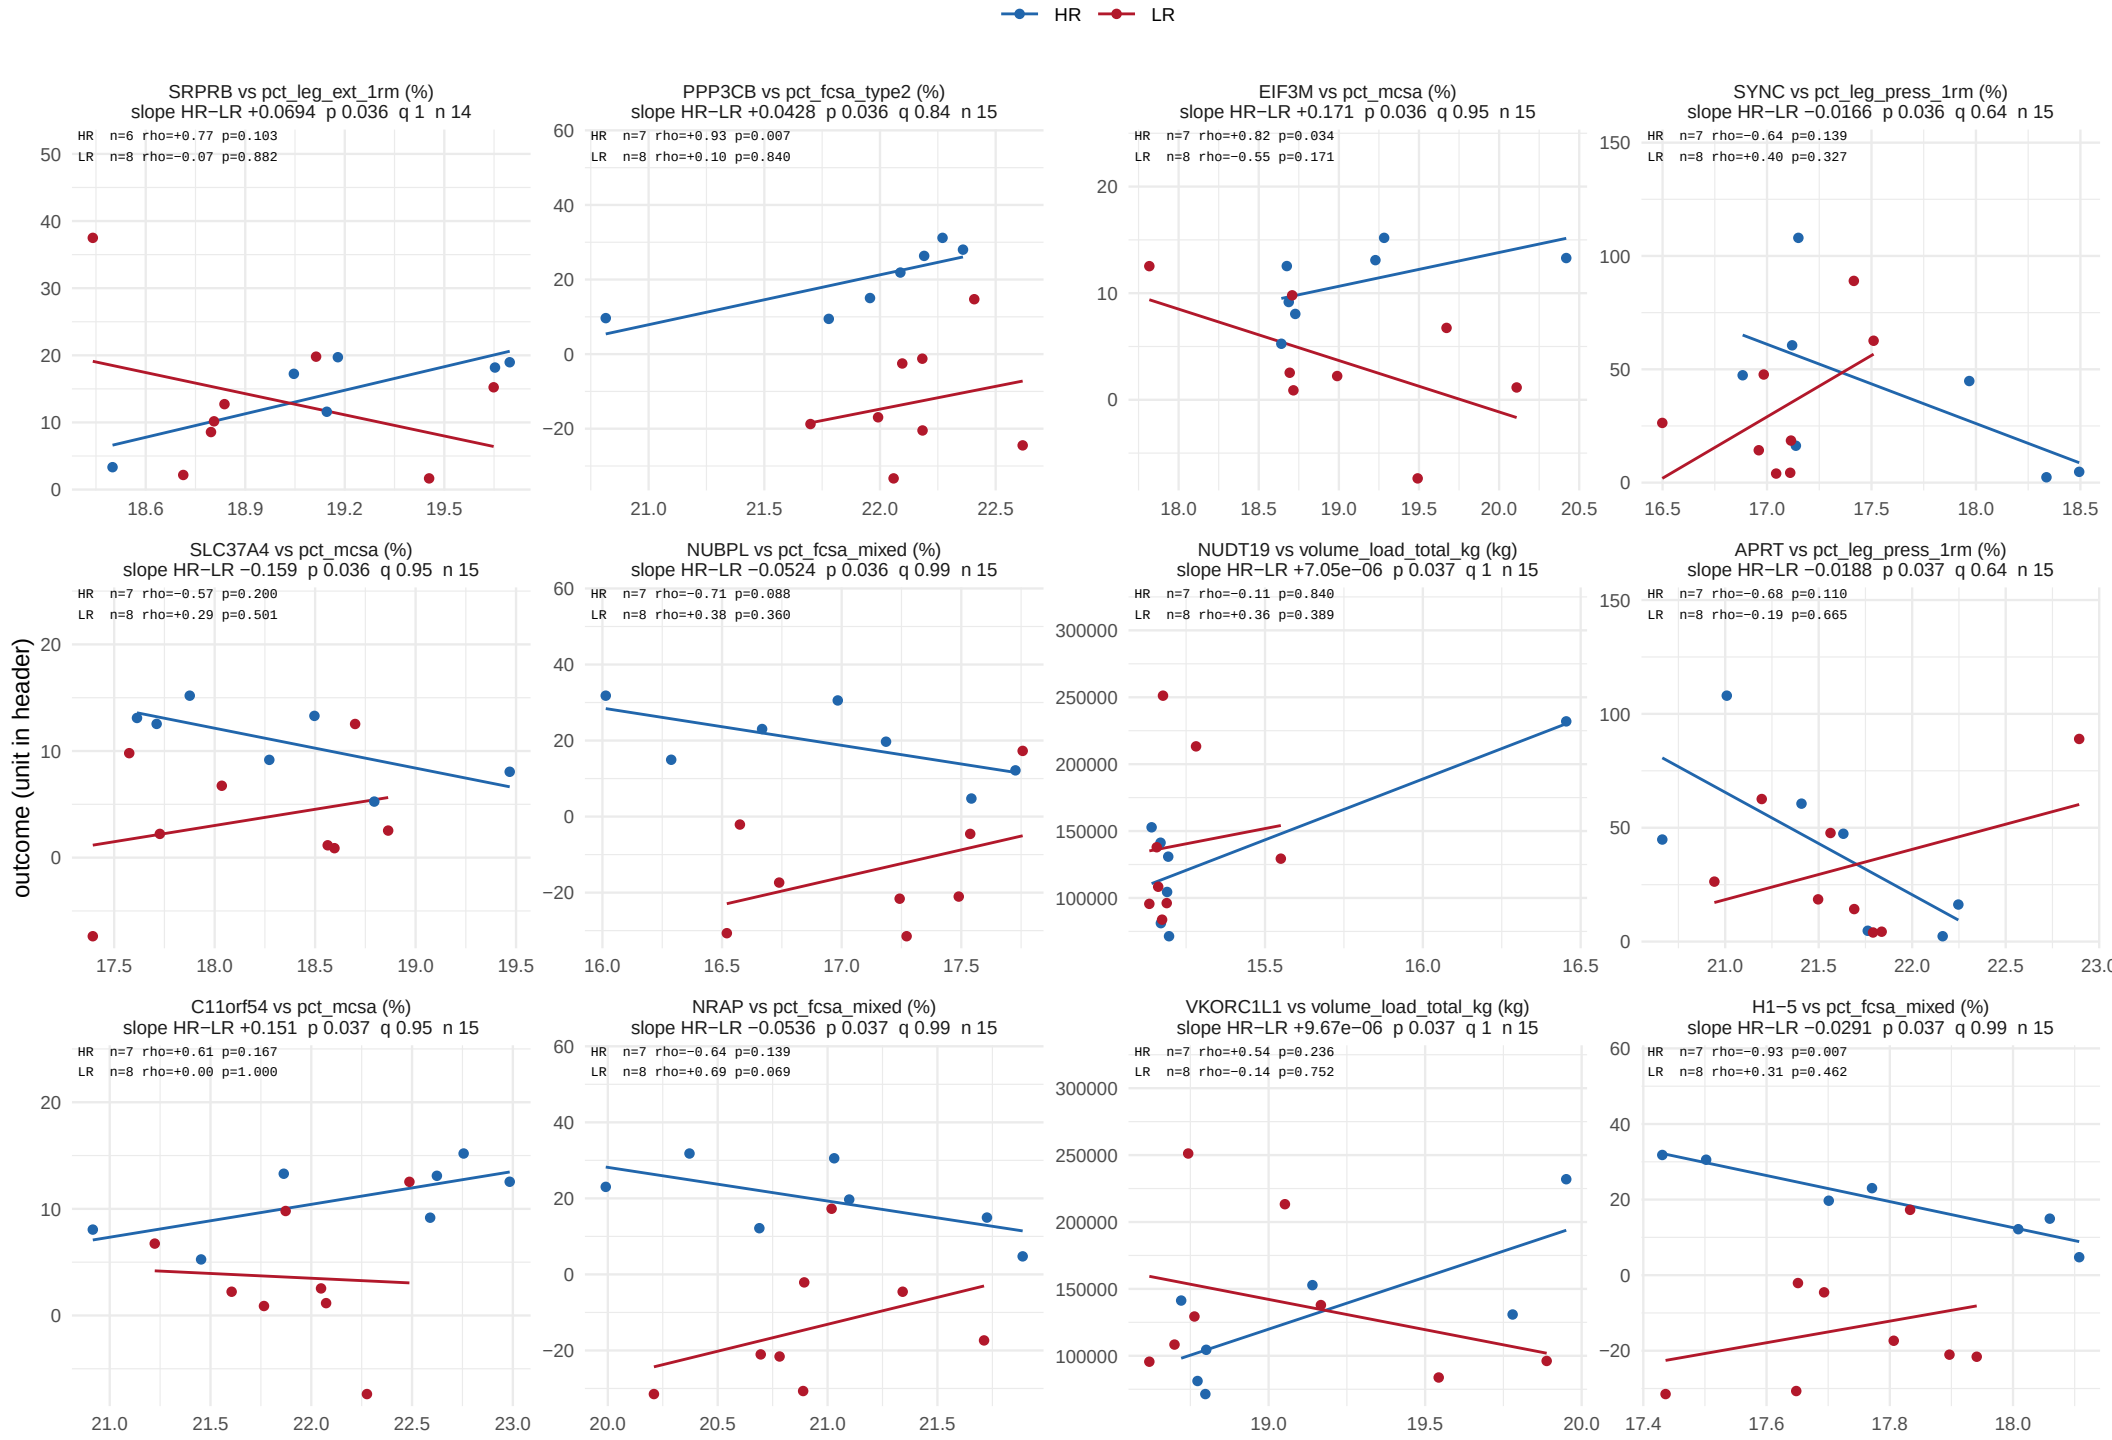

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


565 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 36 of 48.

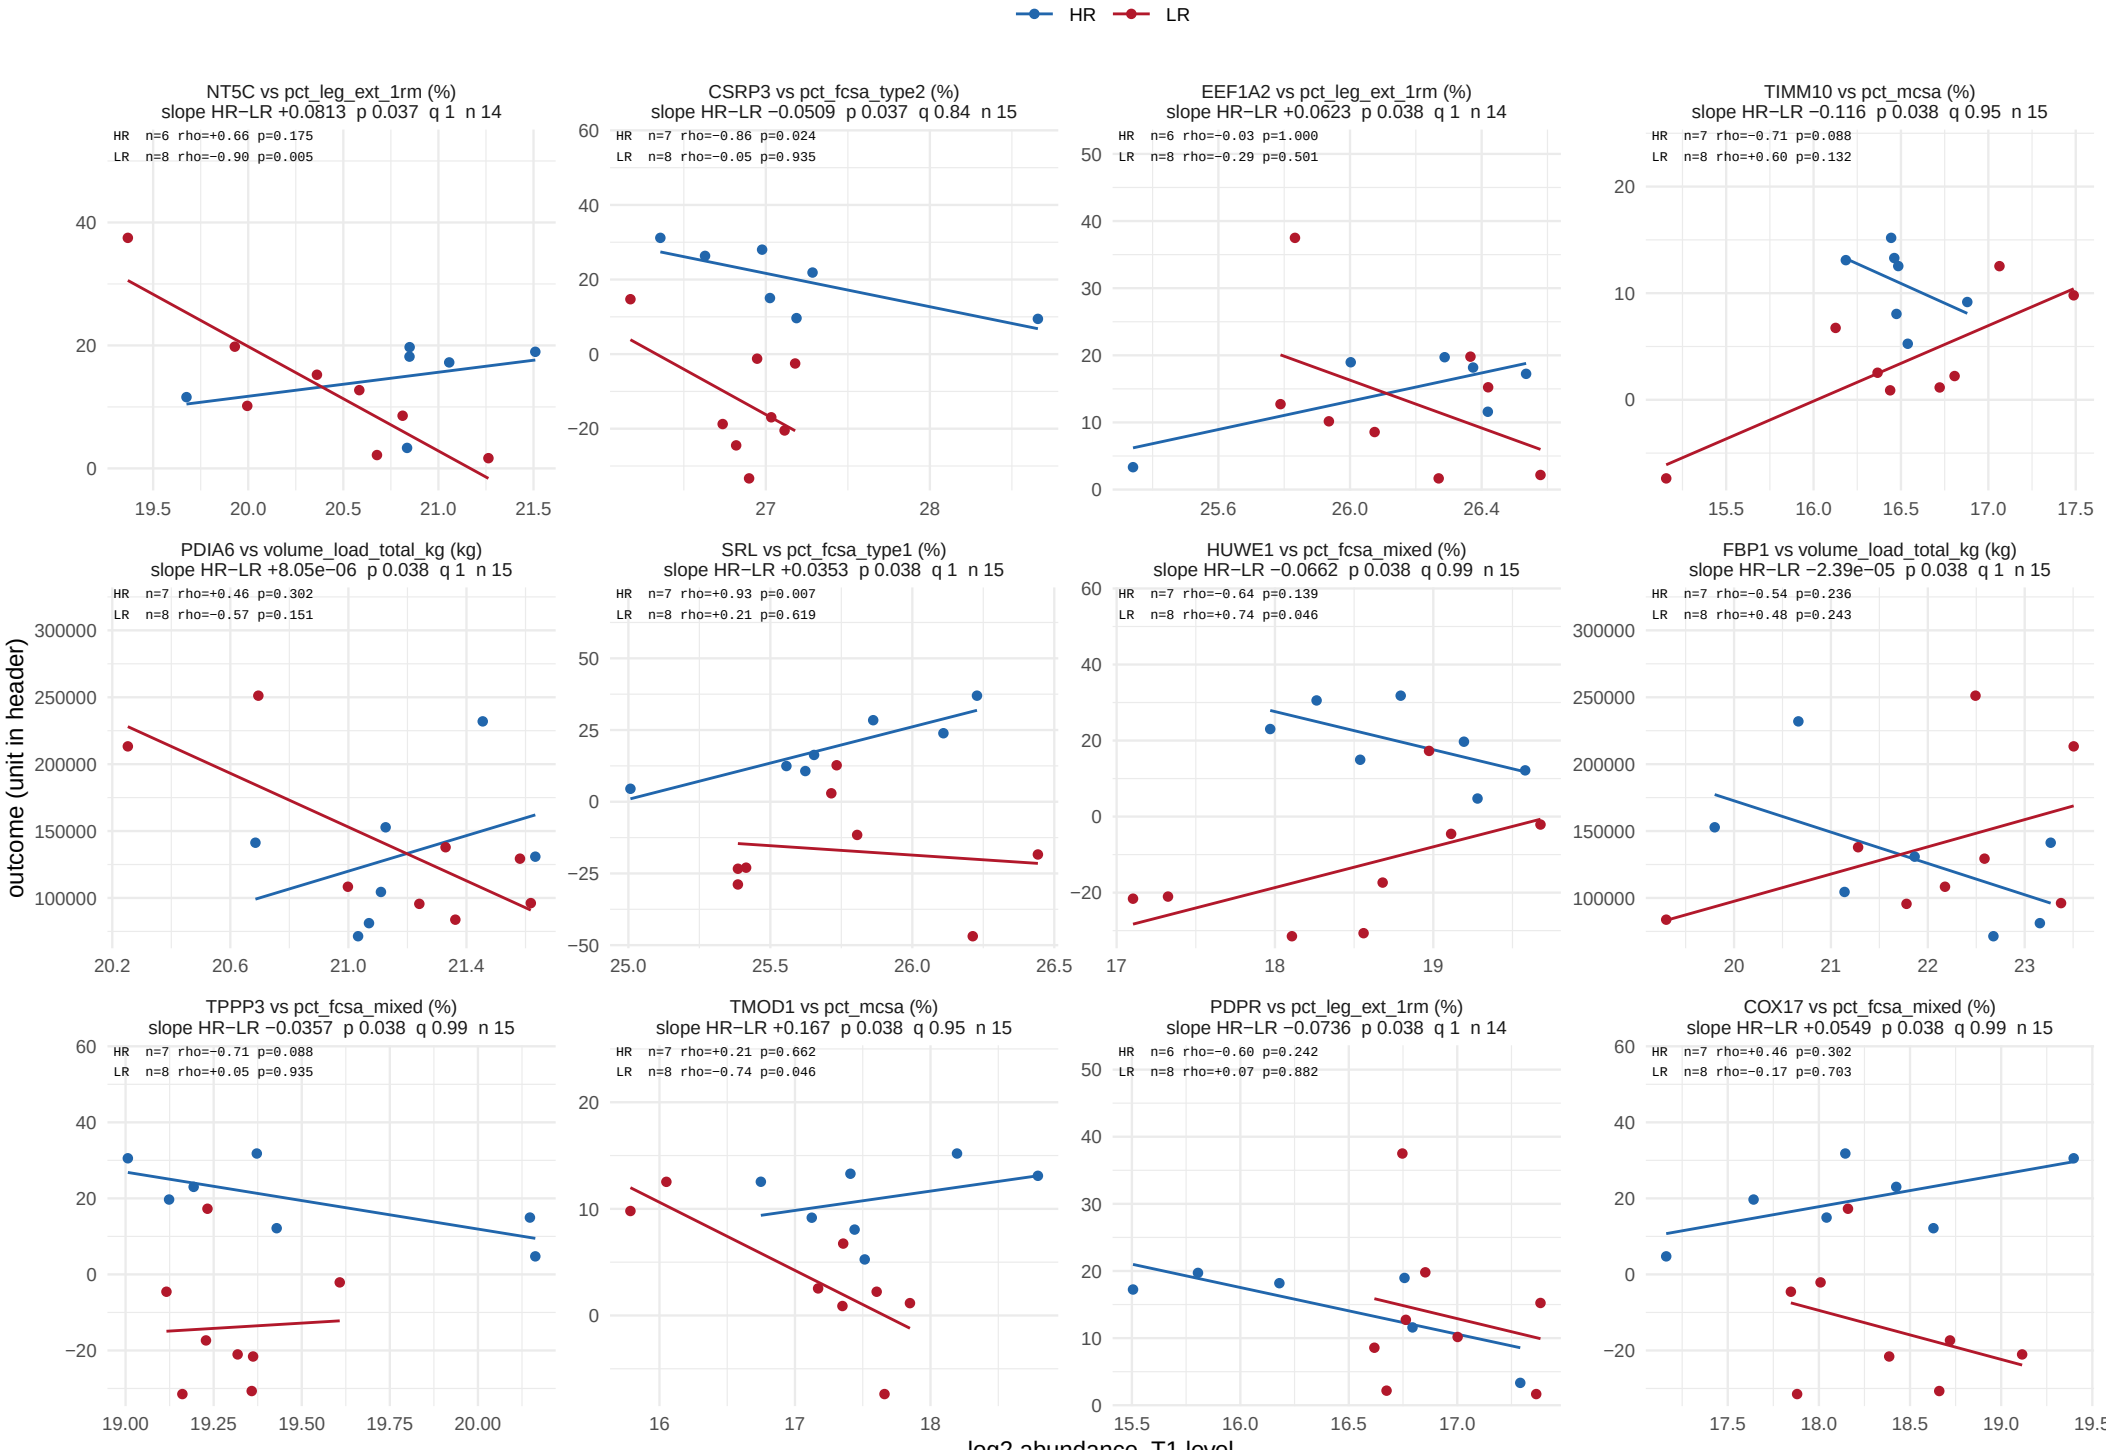

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


565 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 37 of 48.

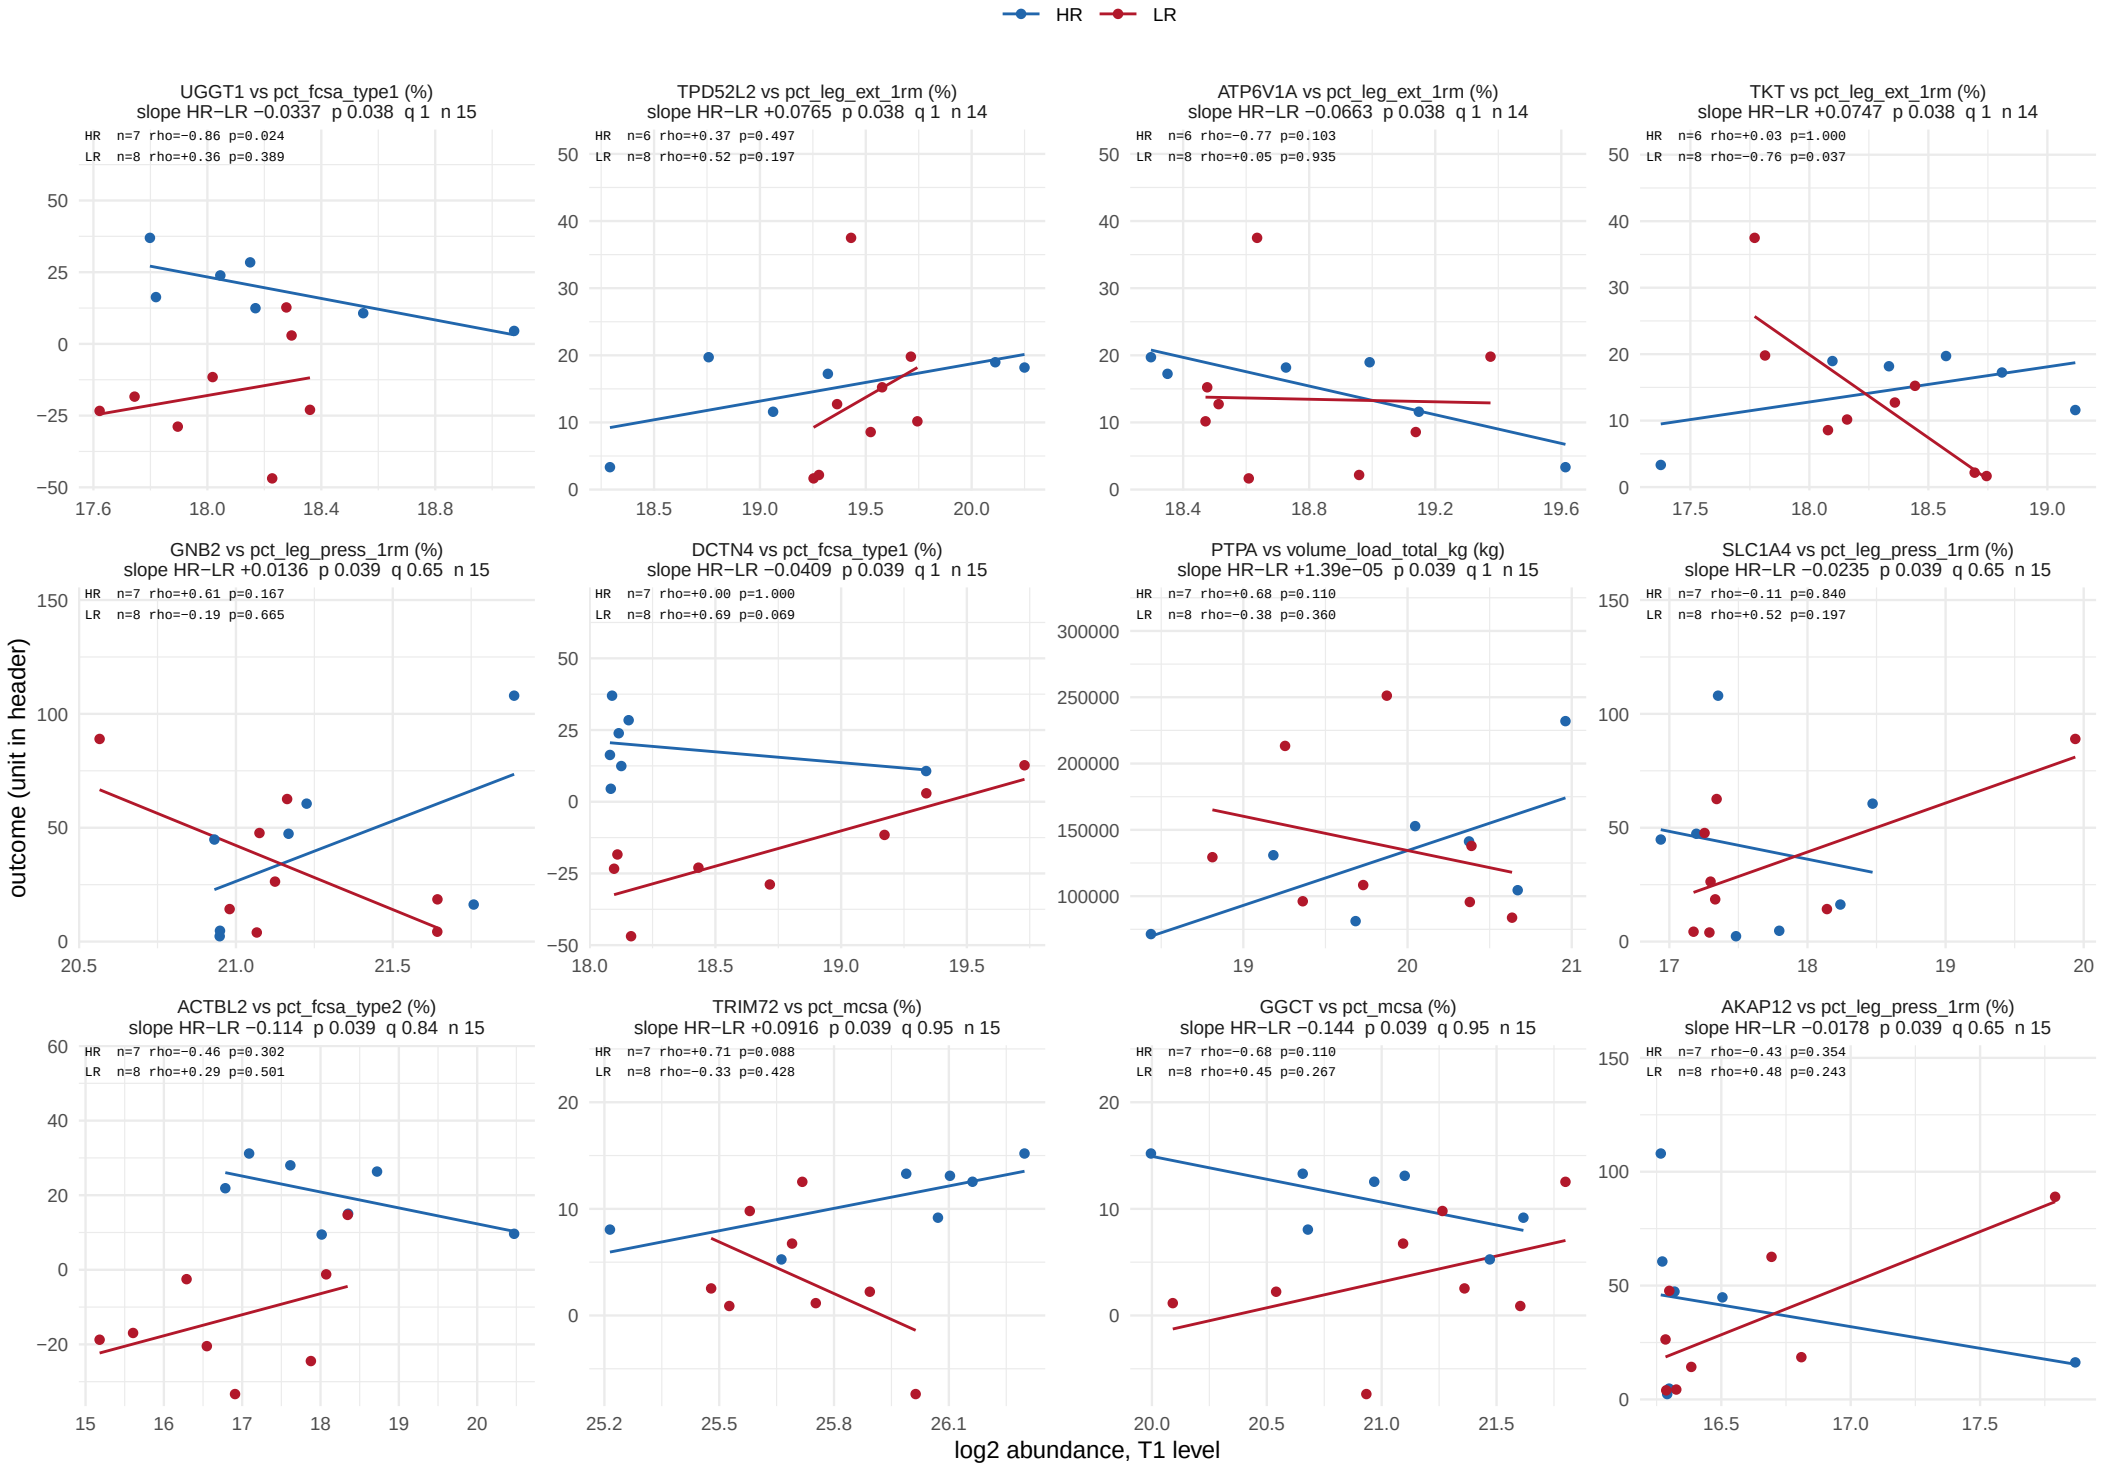

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


565 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 38 of 48.

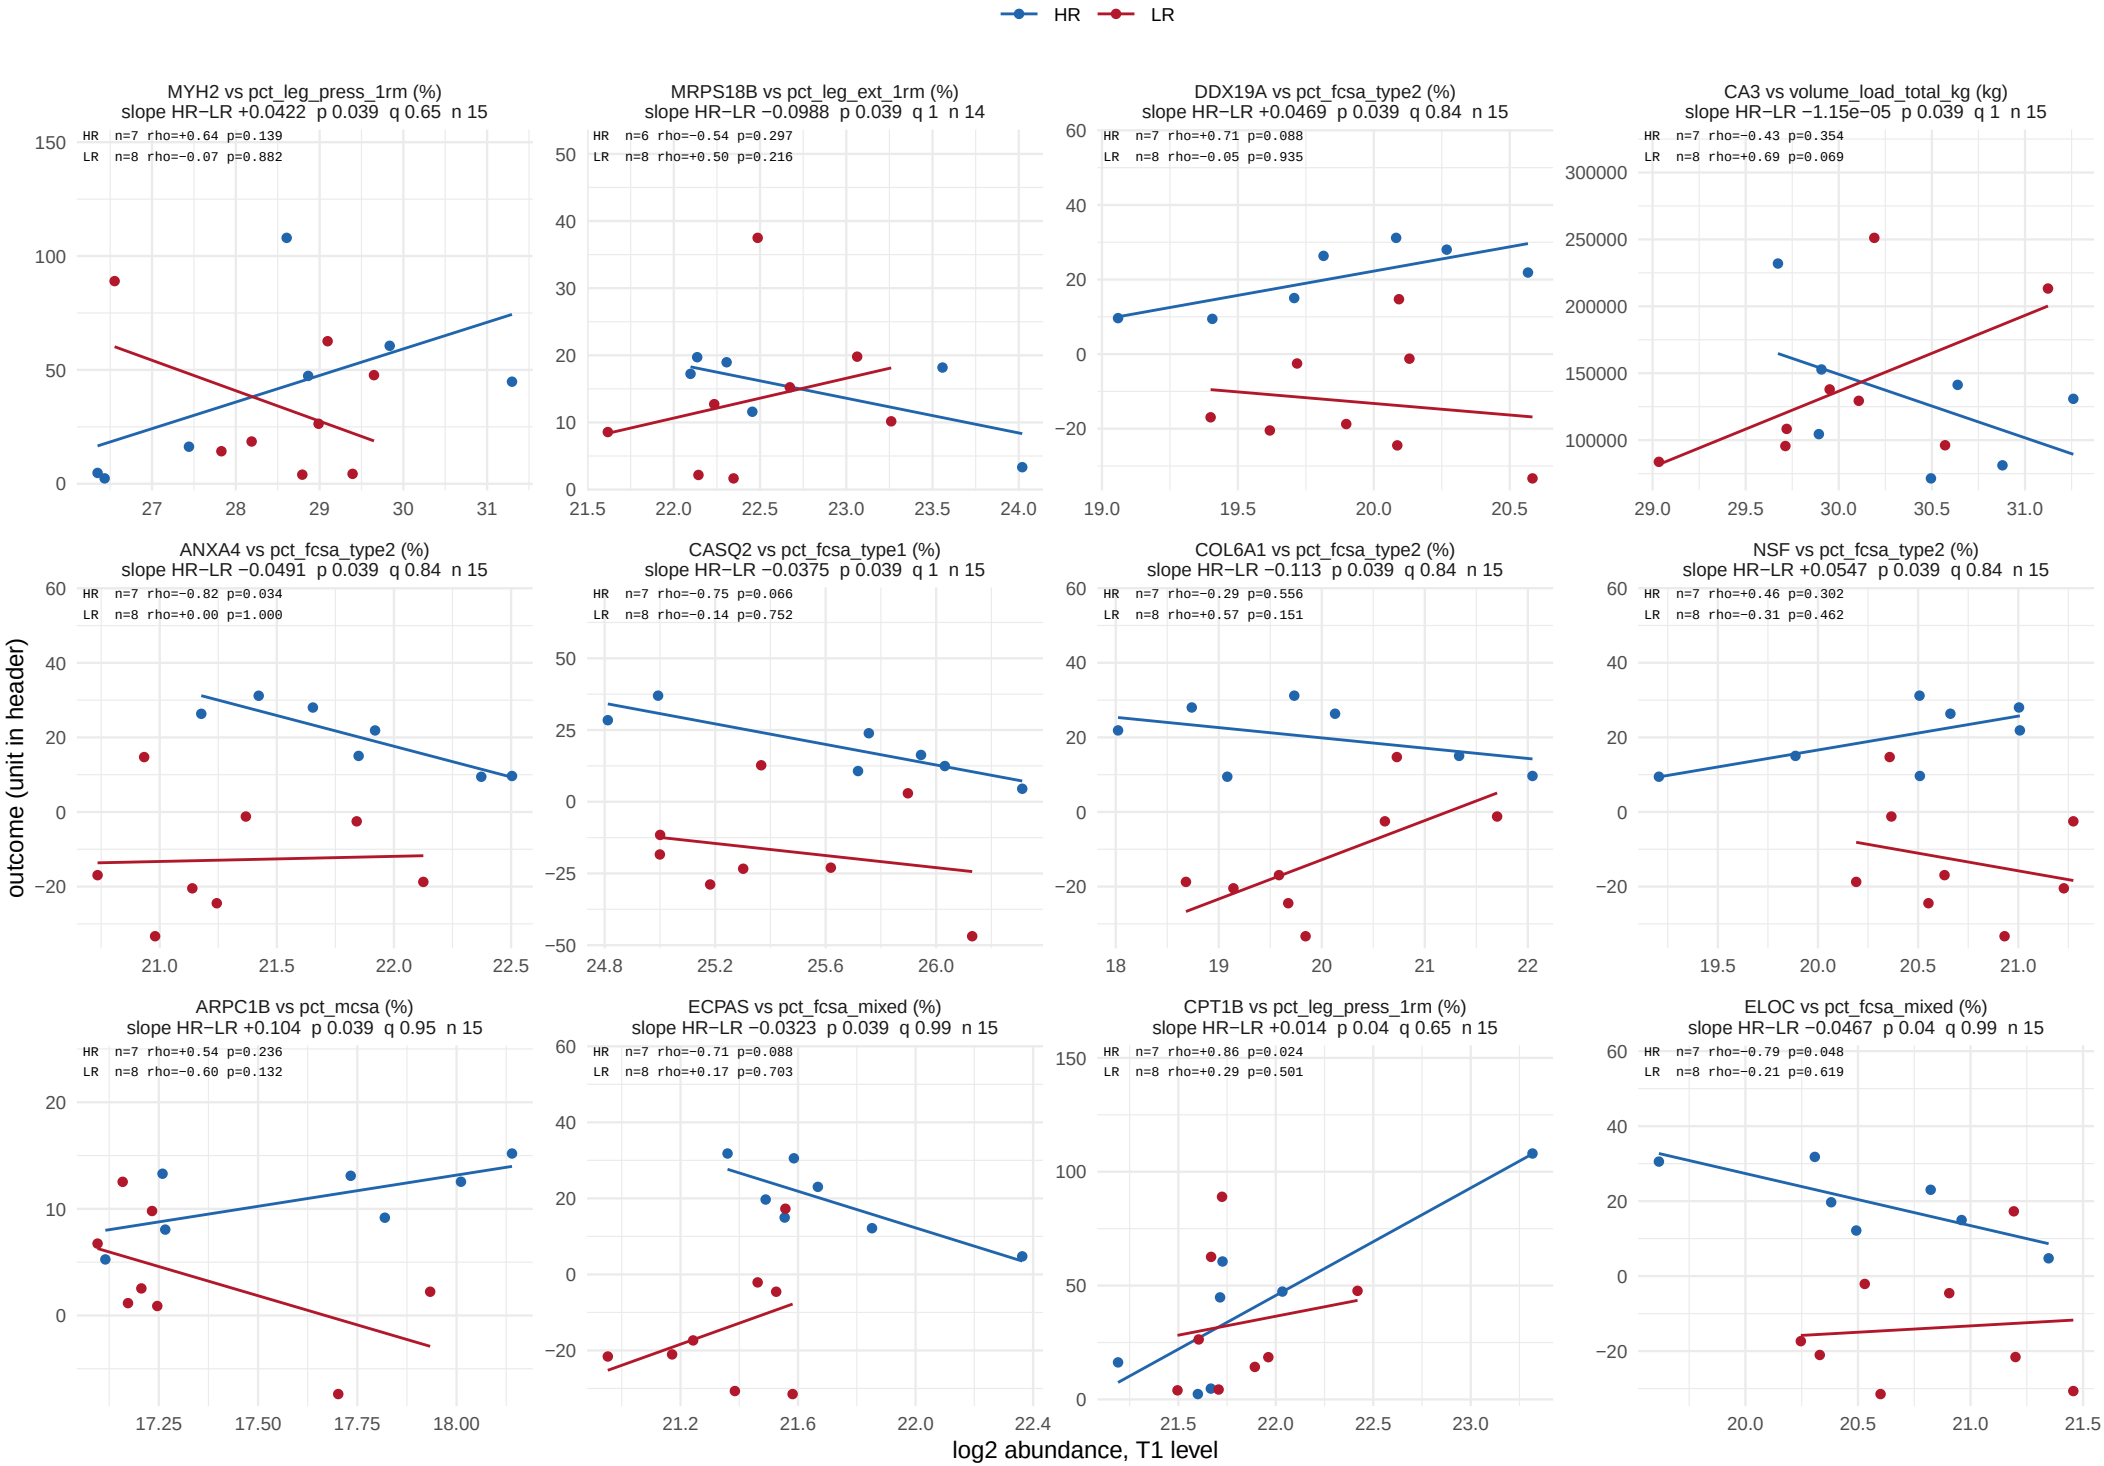

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


565 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 39 of 48.

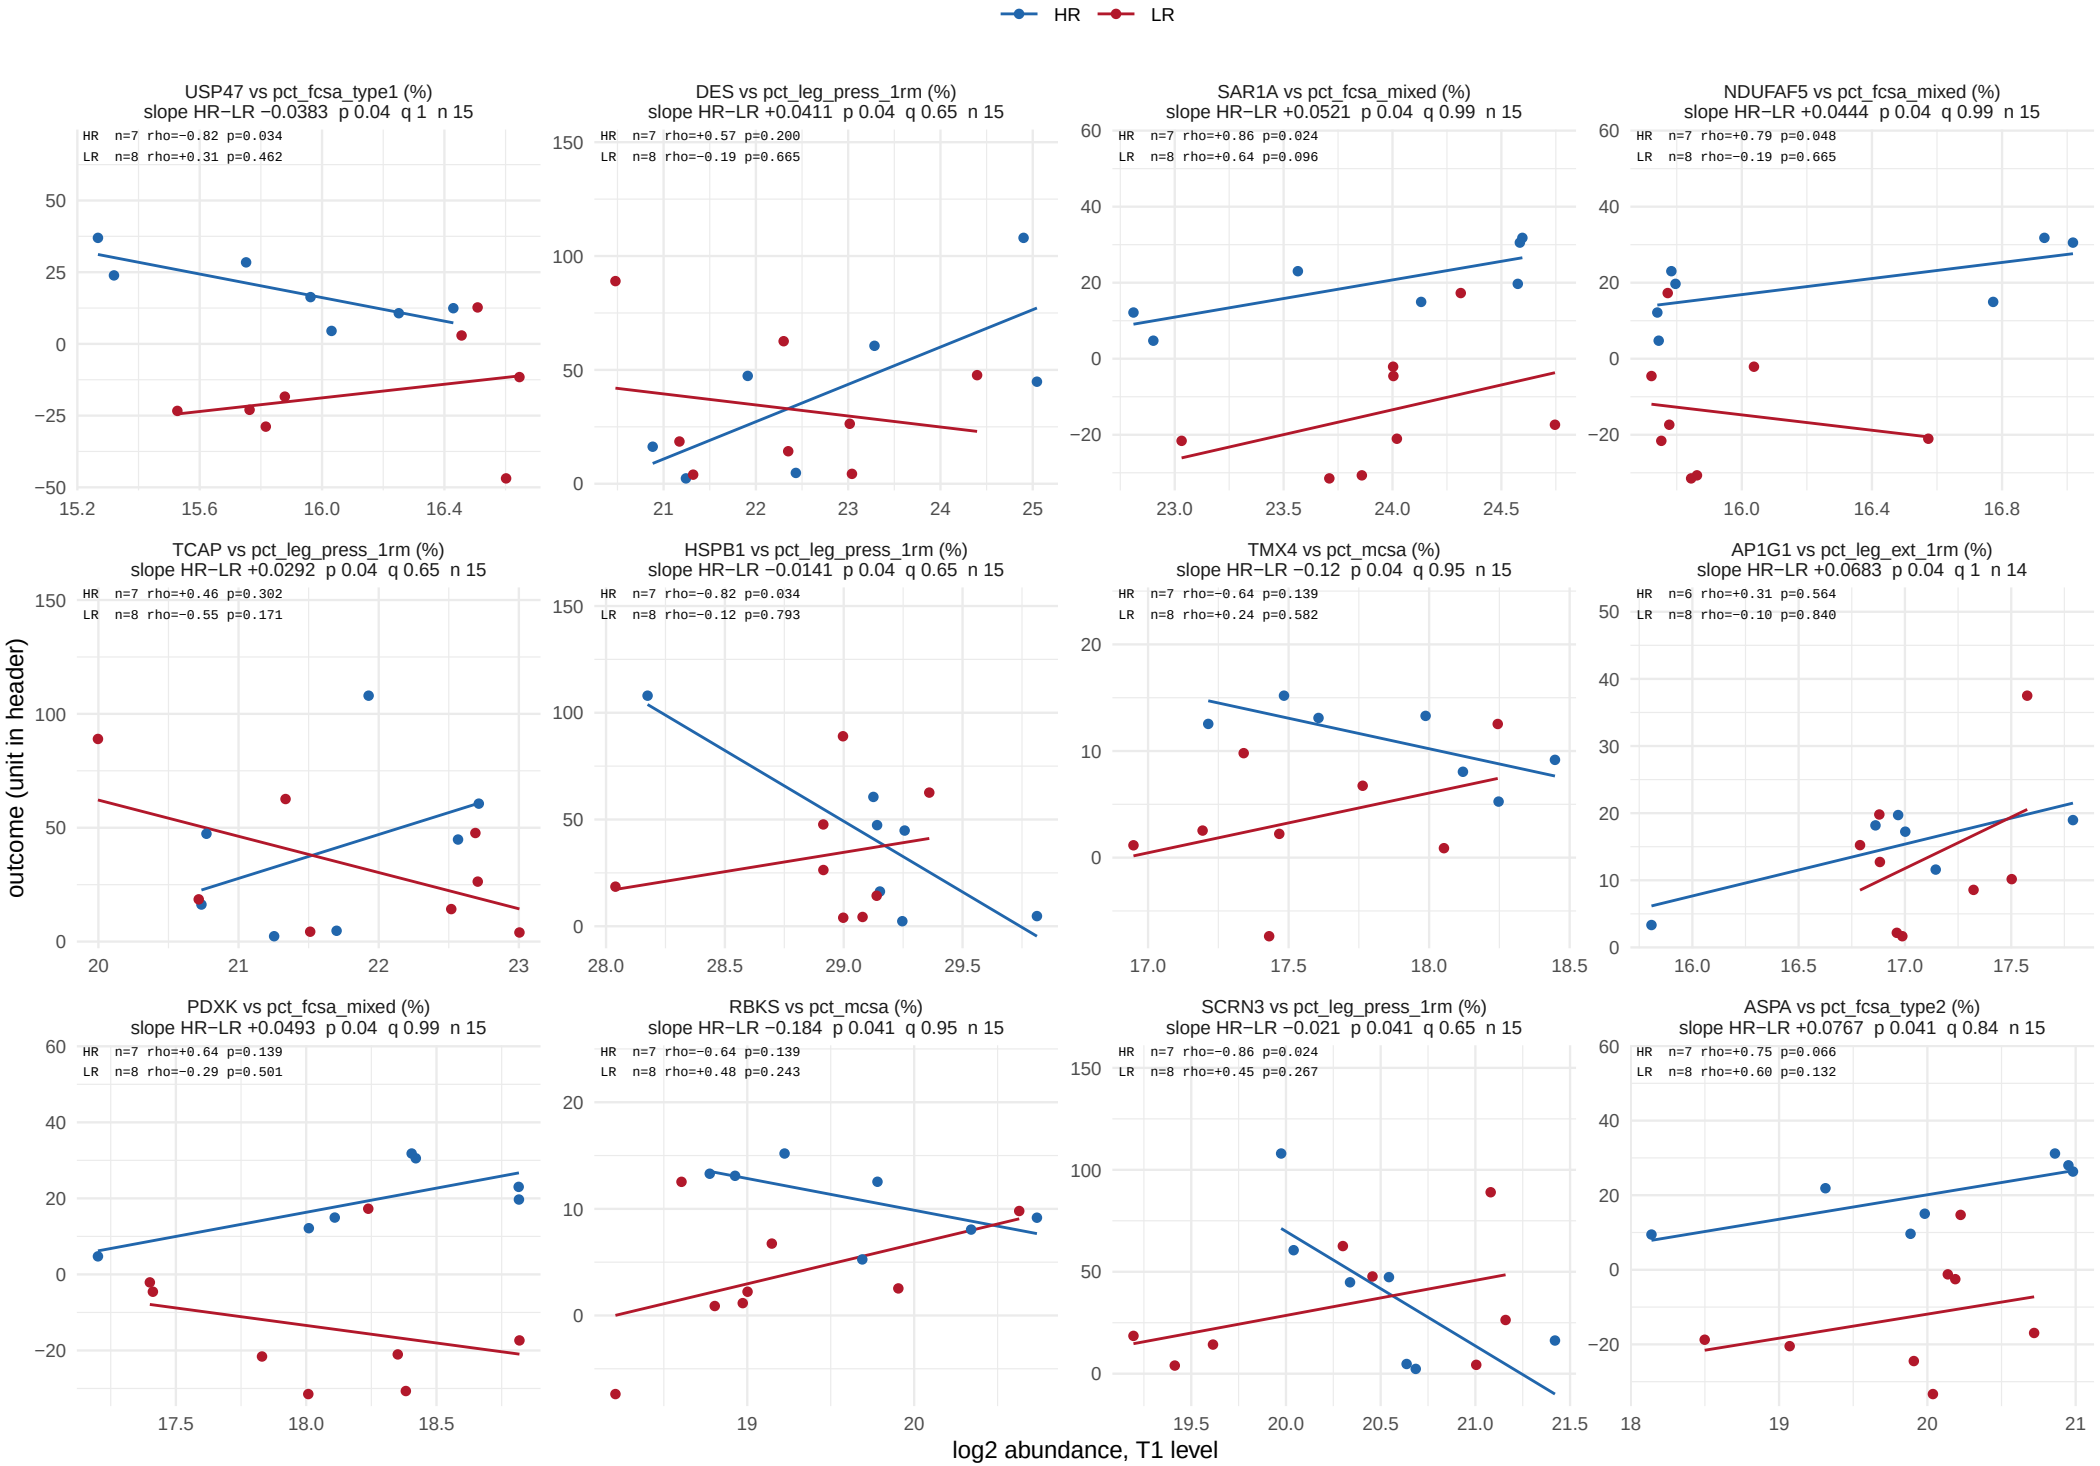

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


565 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 40 of 48.

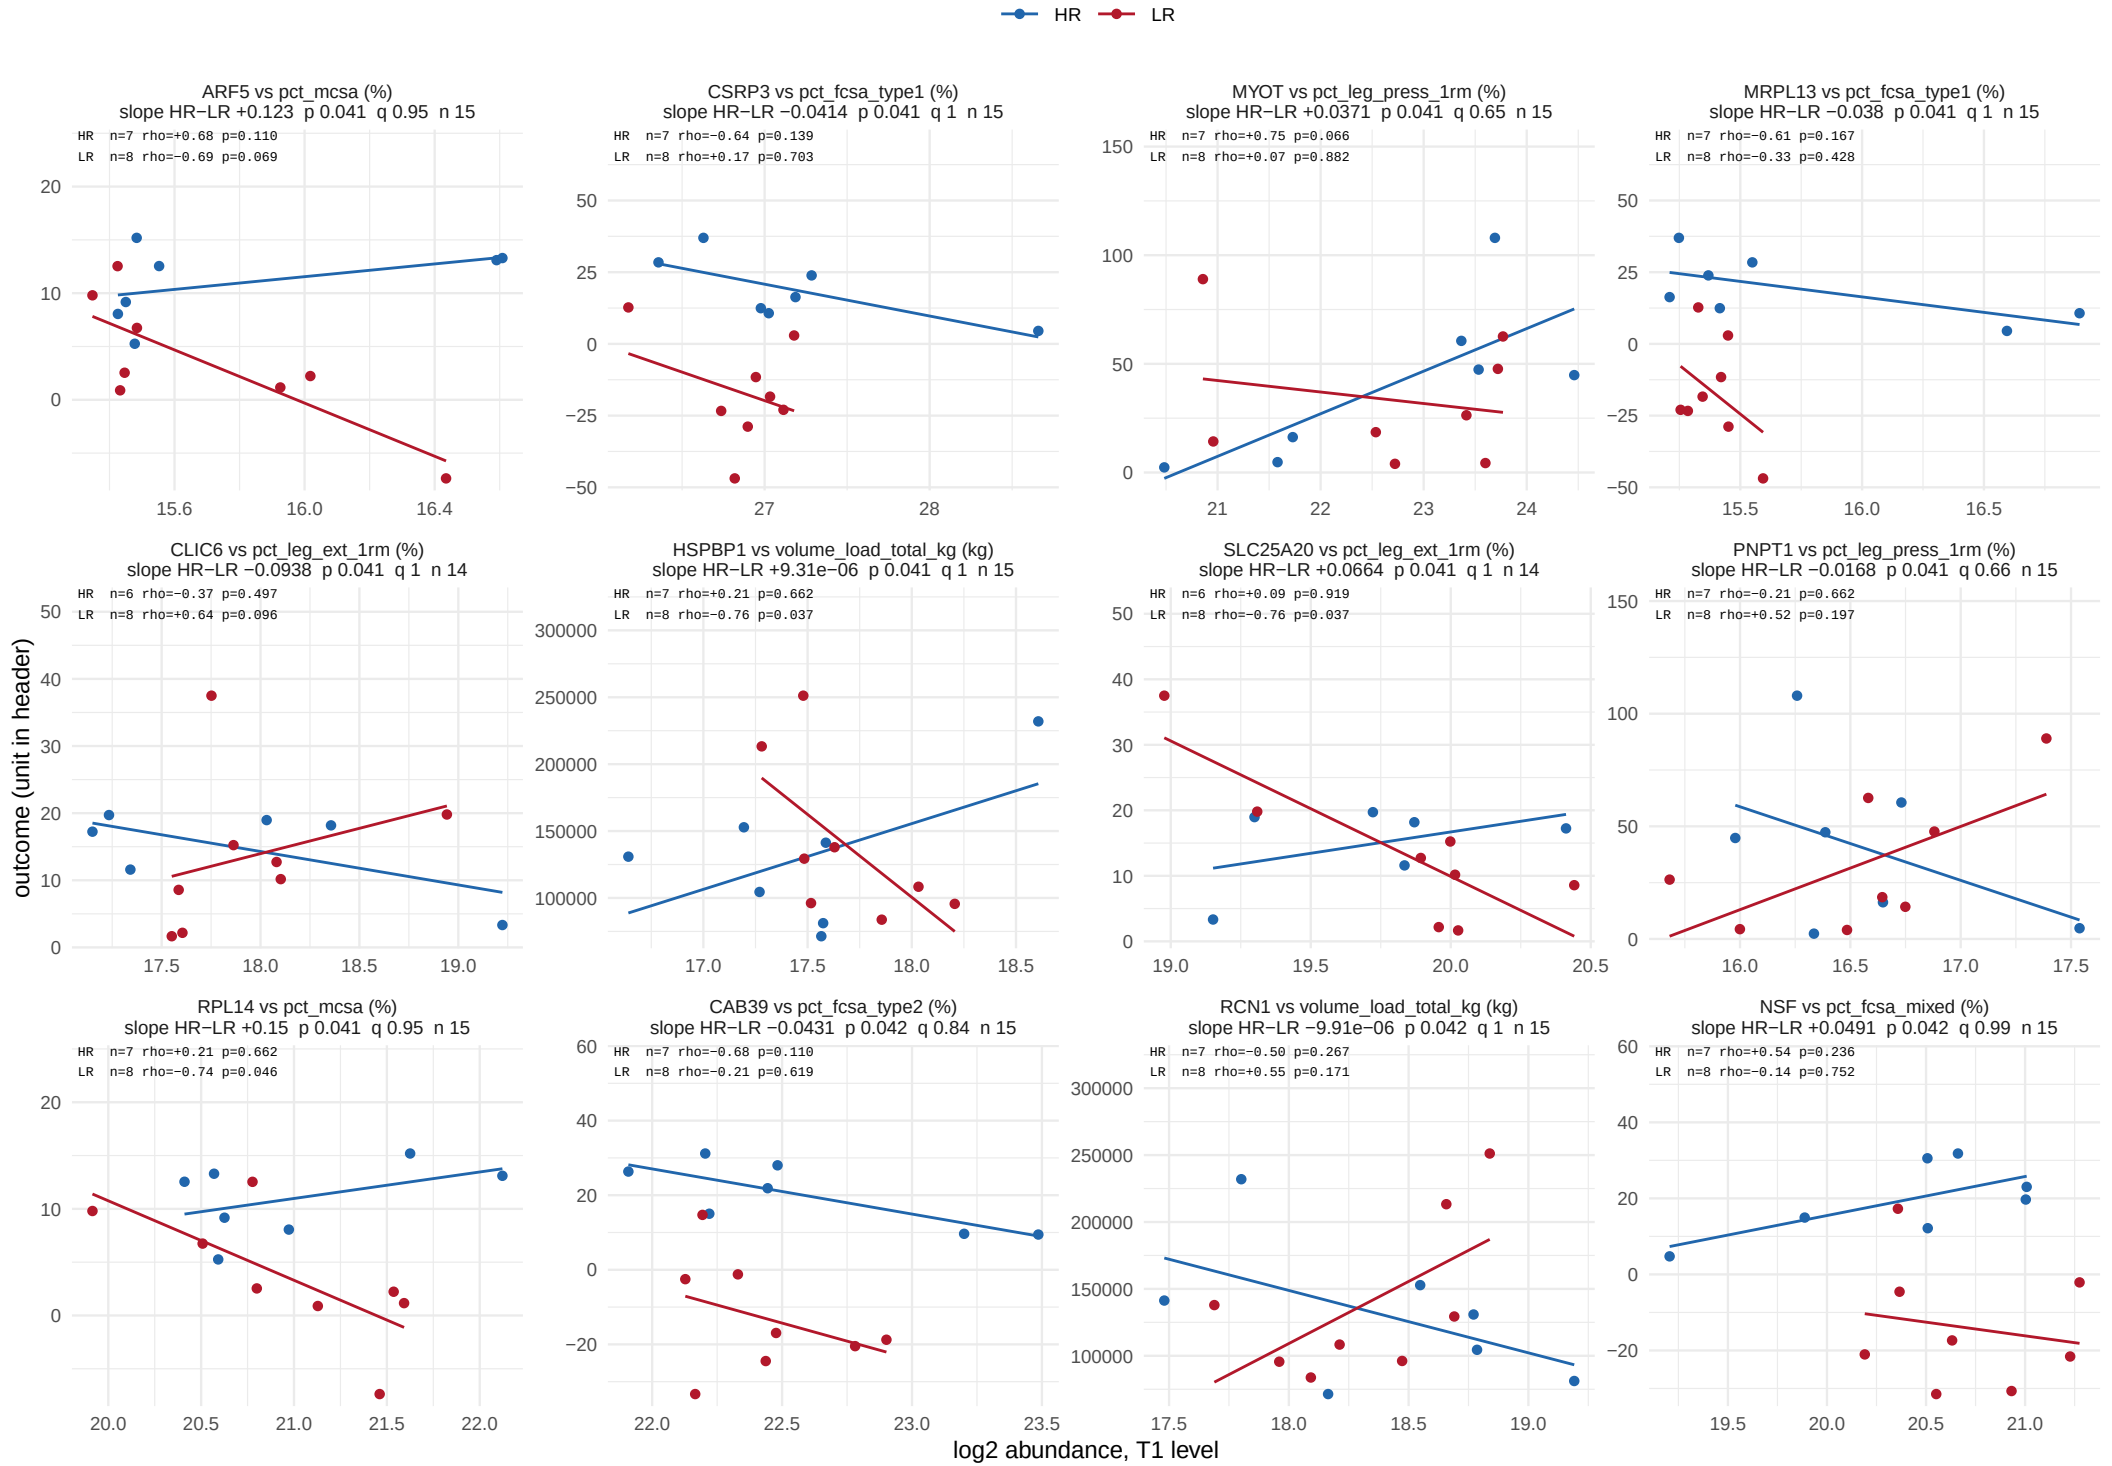

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


565 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 41 of 48.

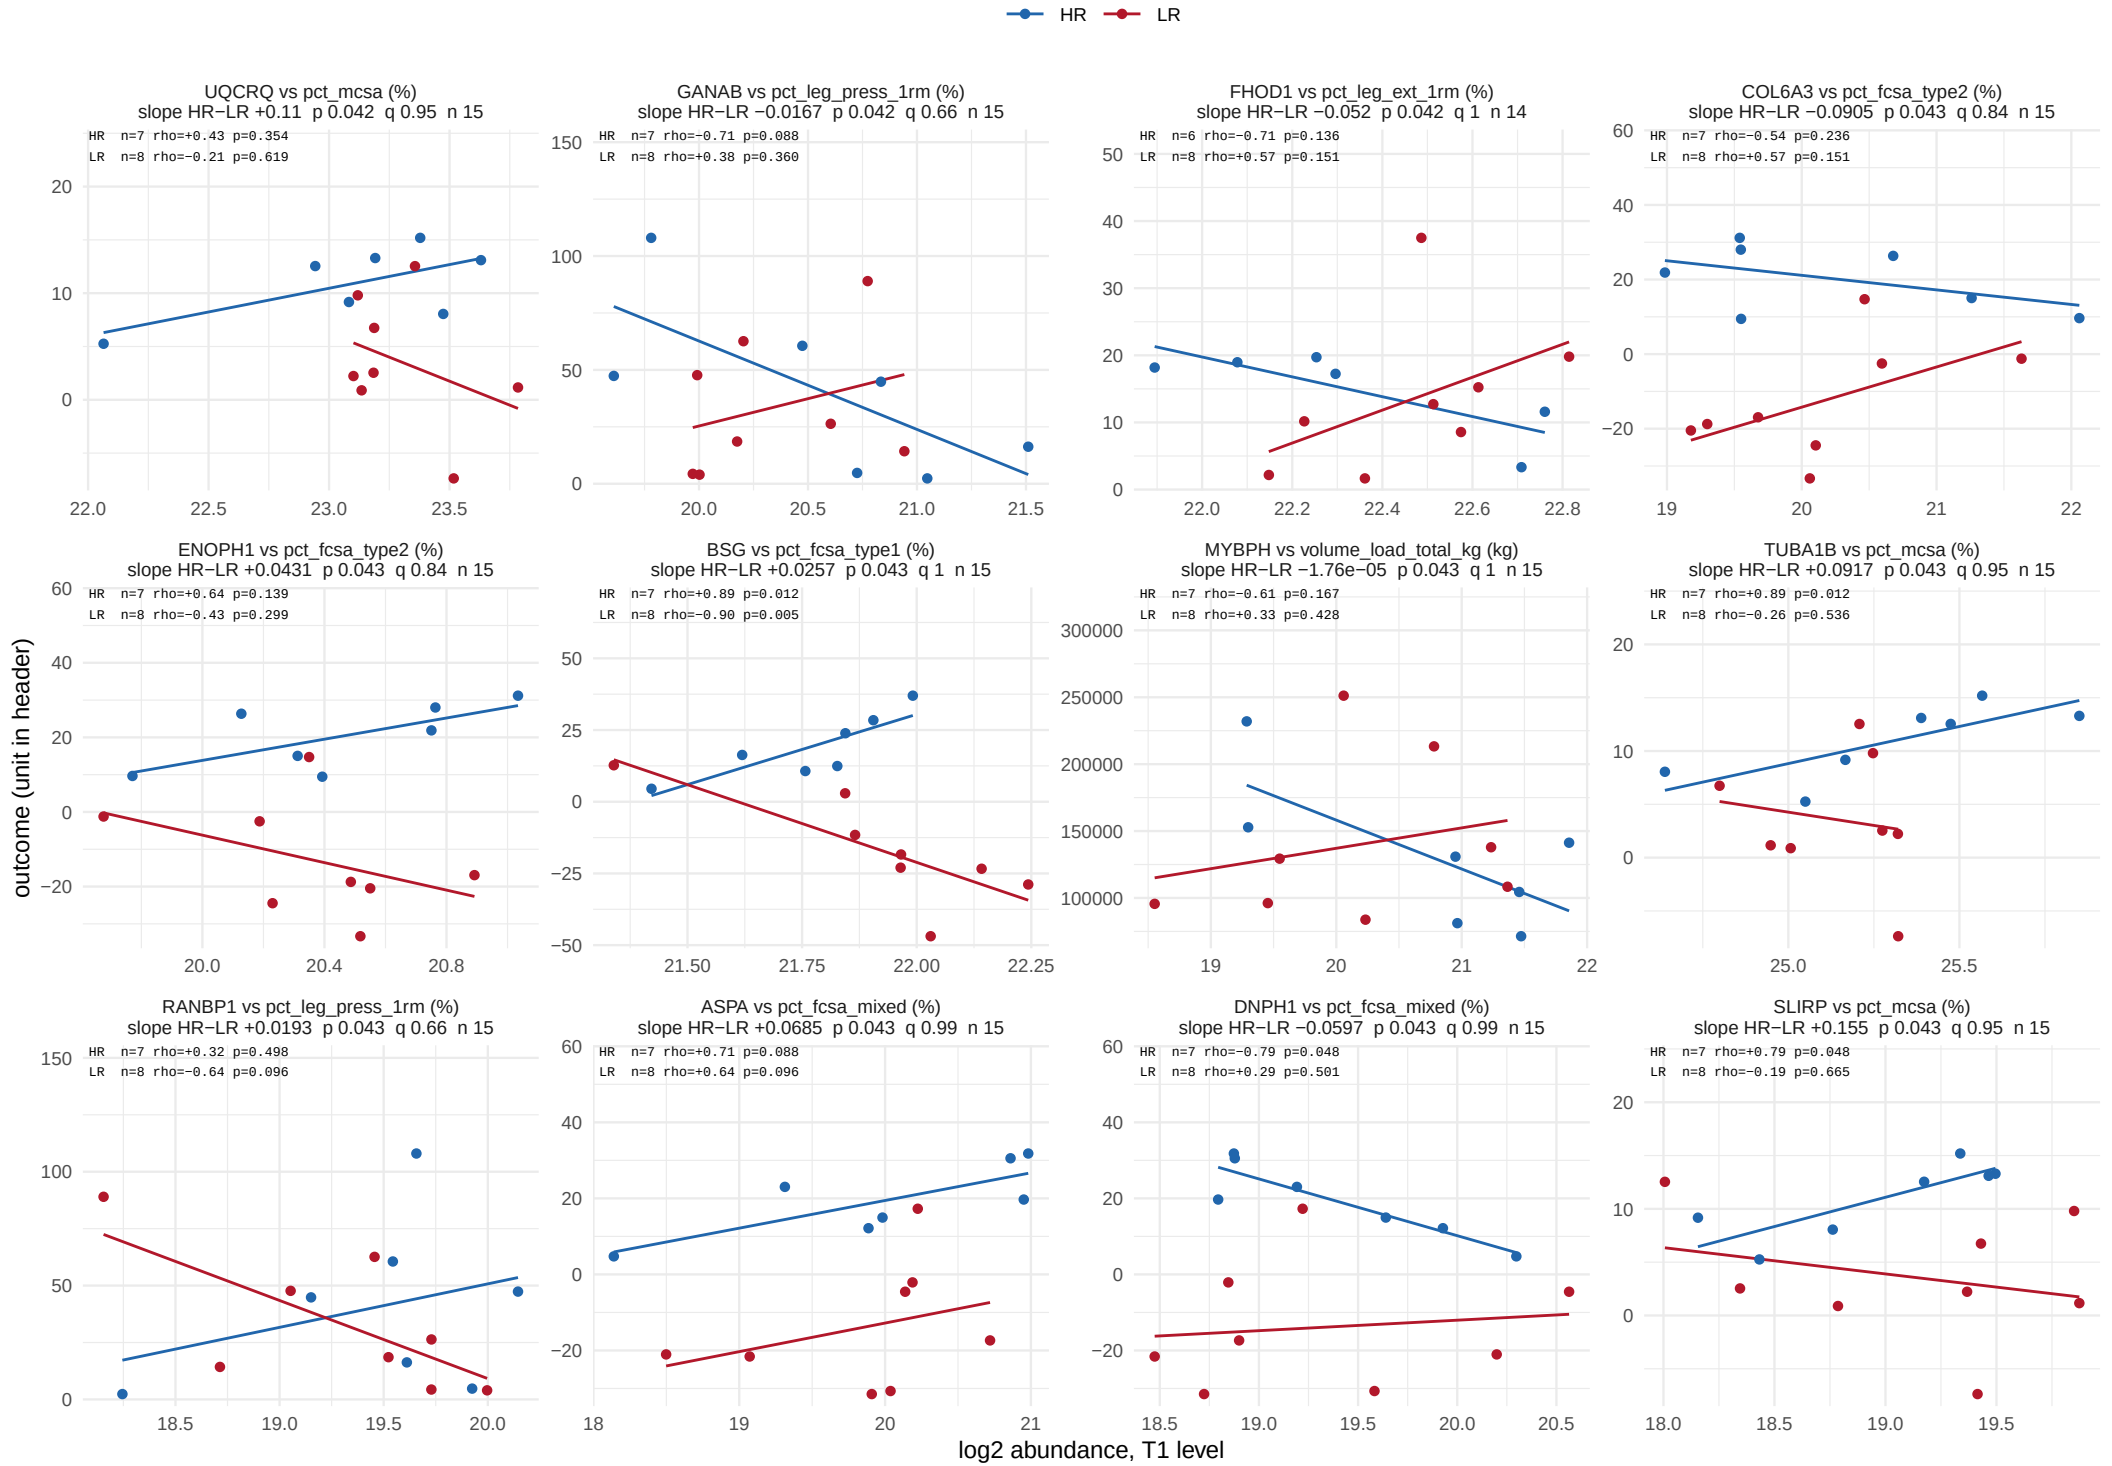

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


565 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 42 of 48.

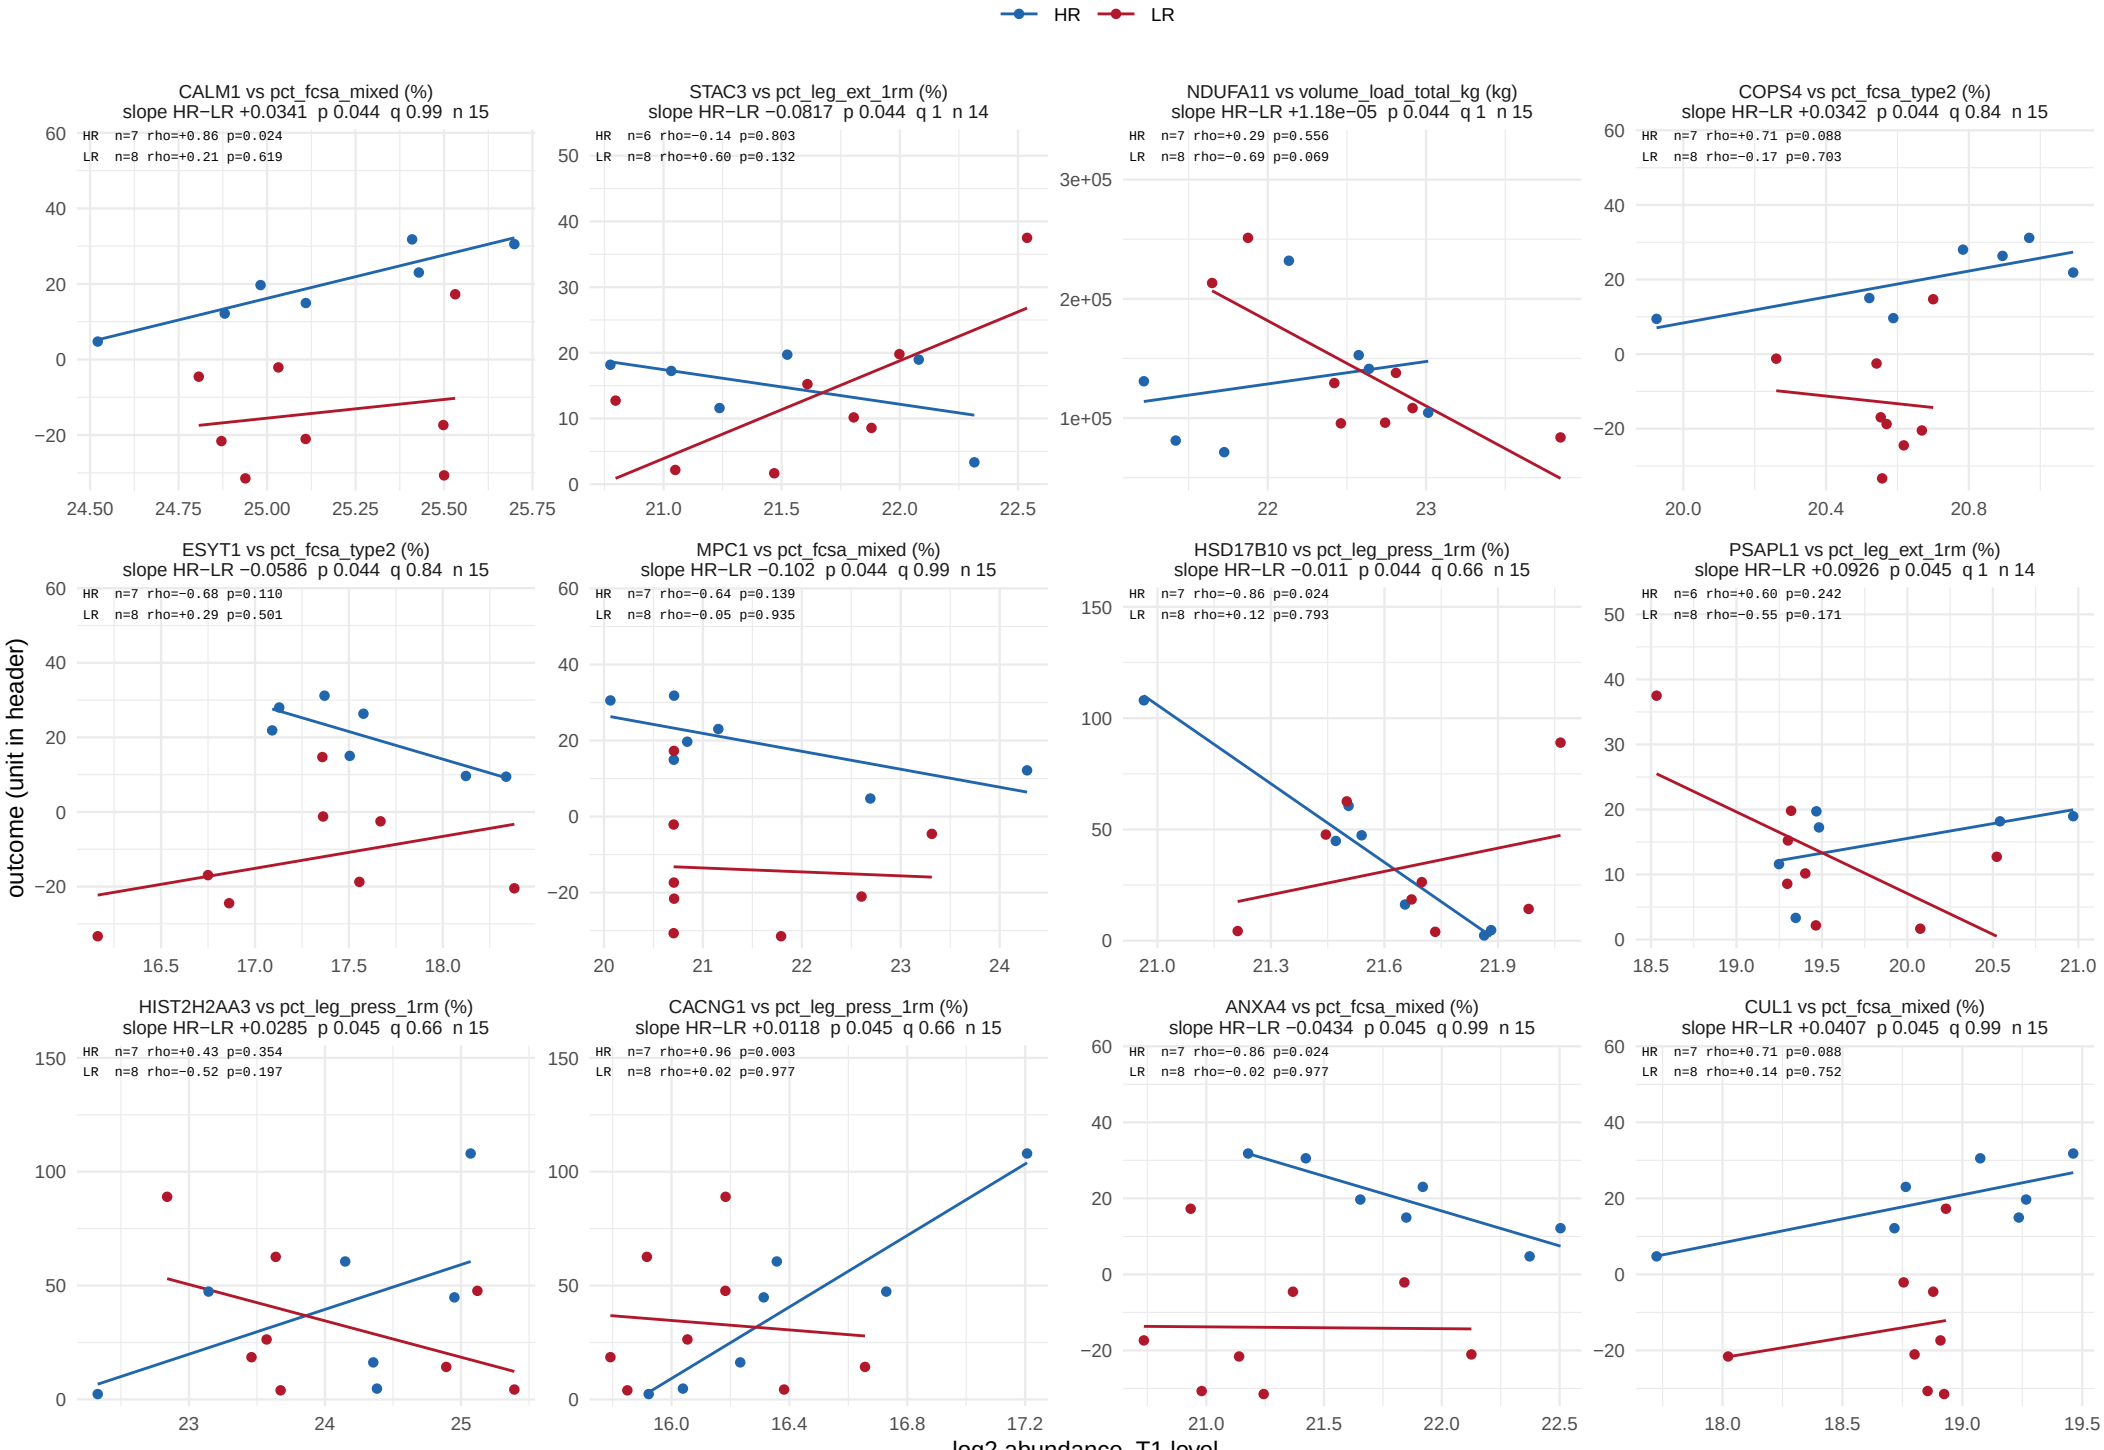

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


565 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 43 of 48.

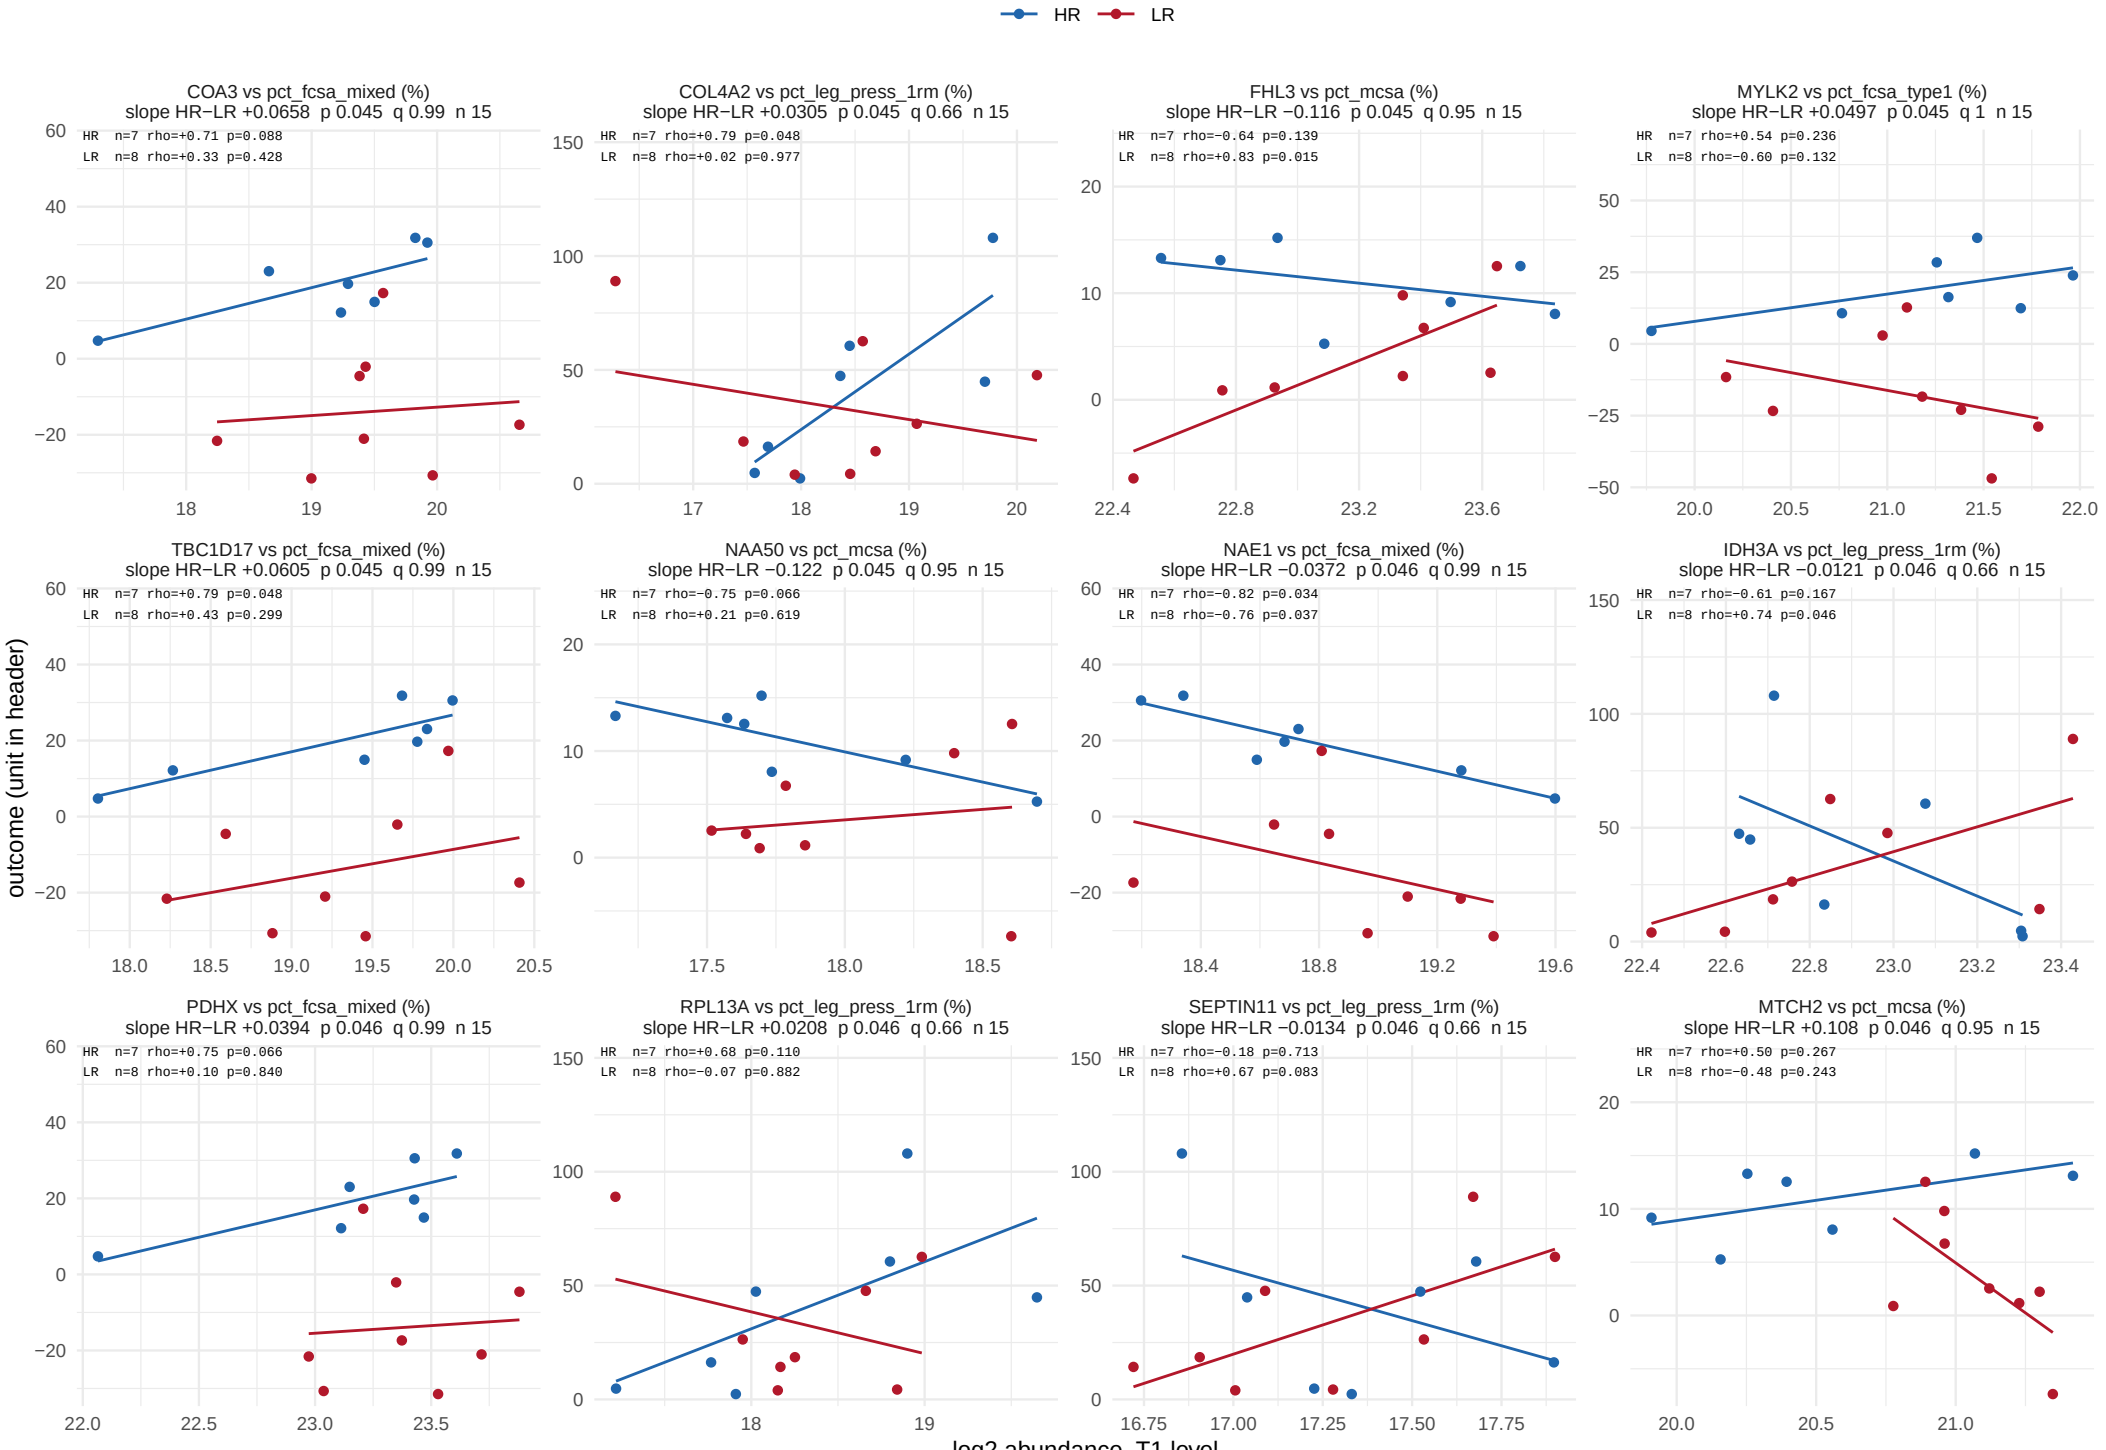

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


565 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 44 of 48.

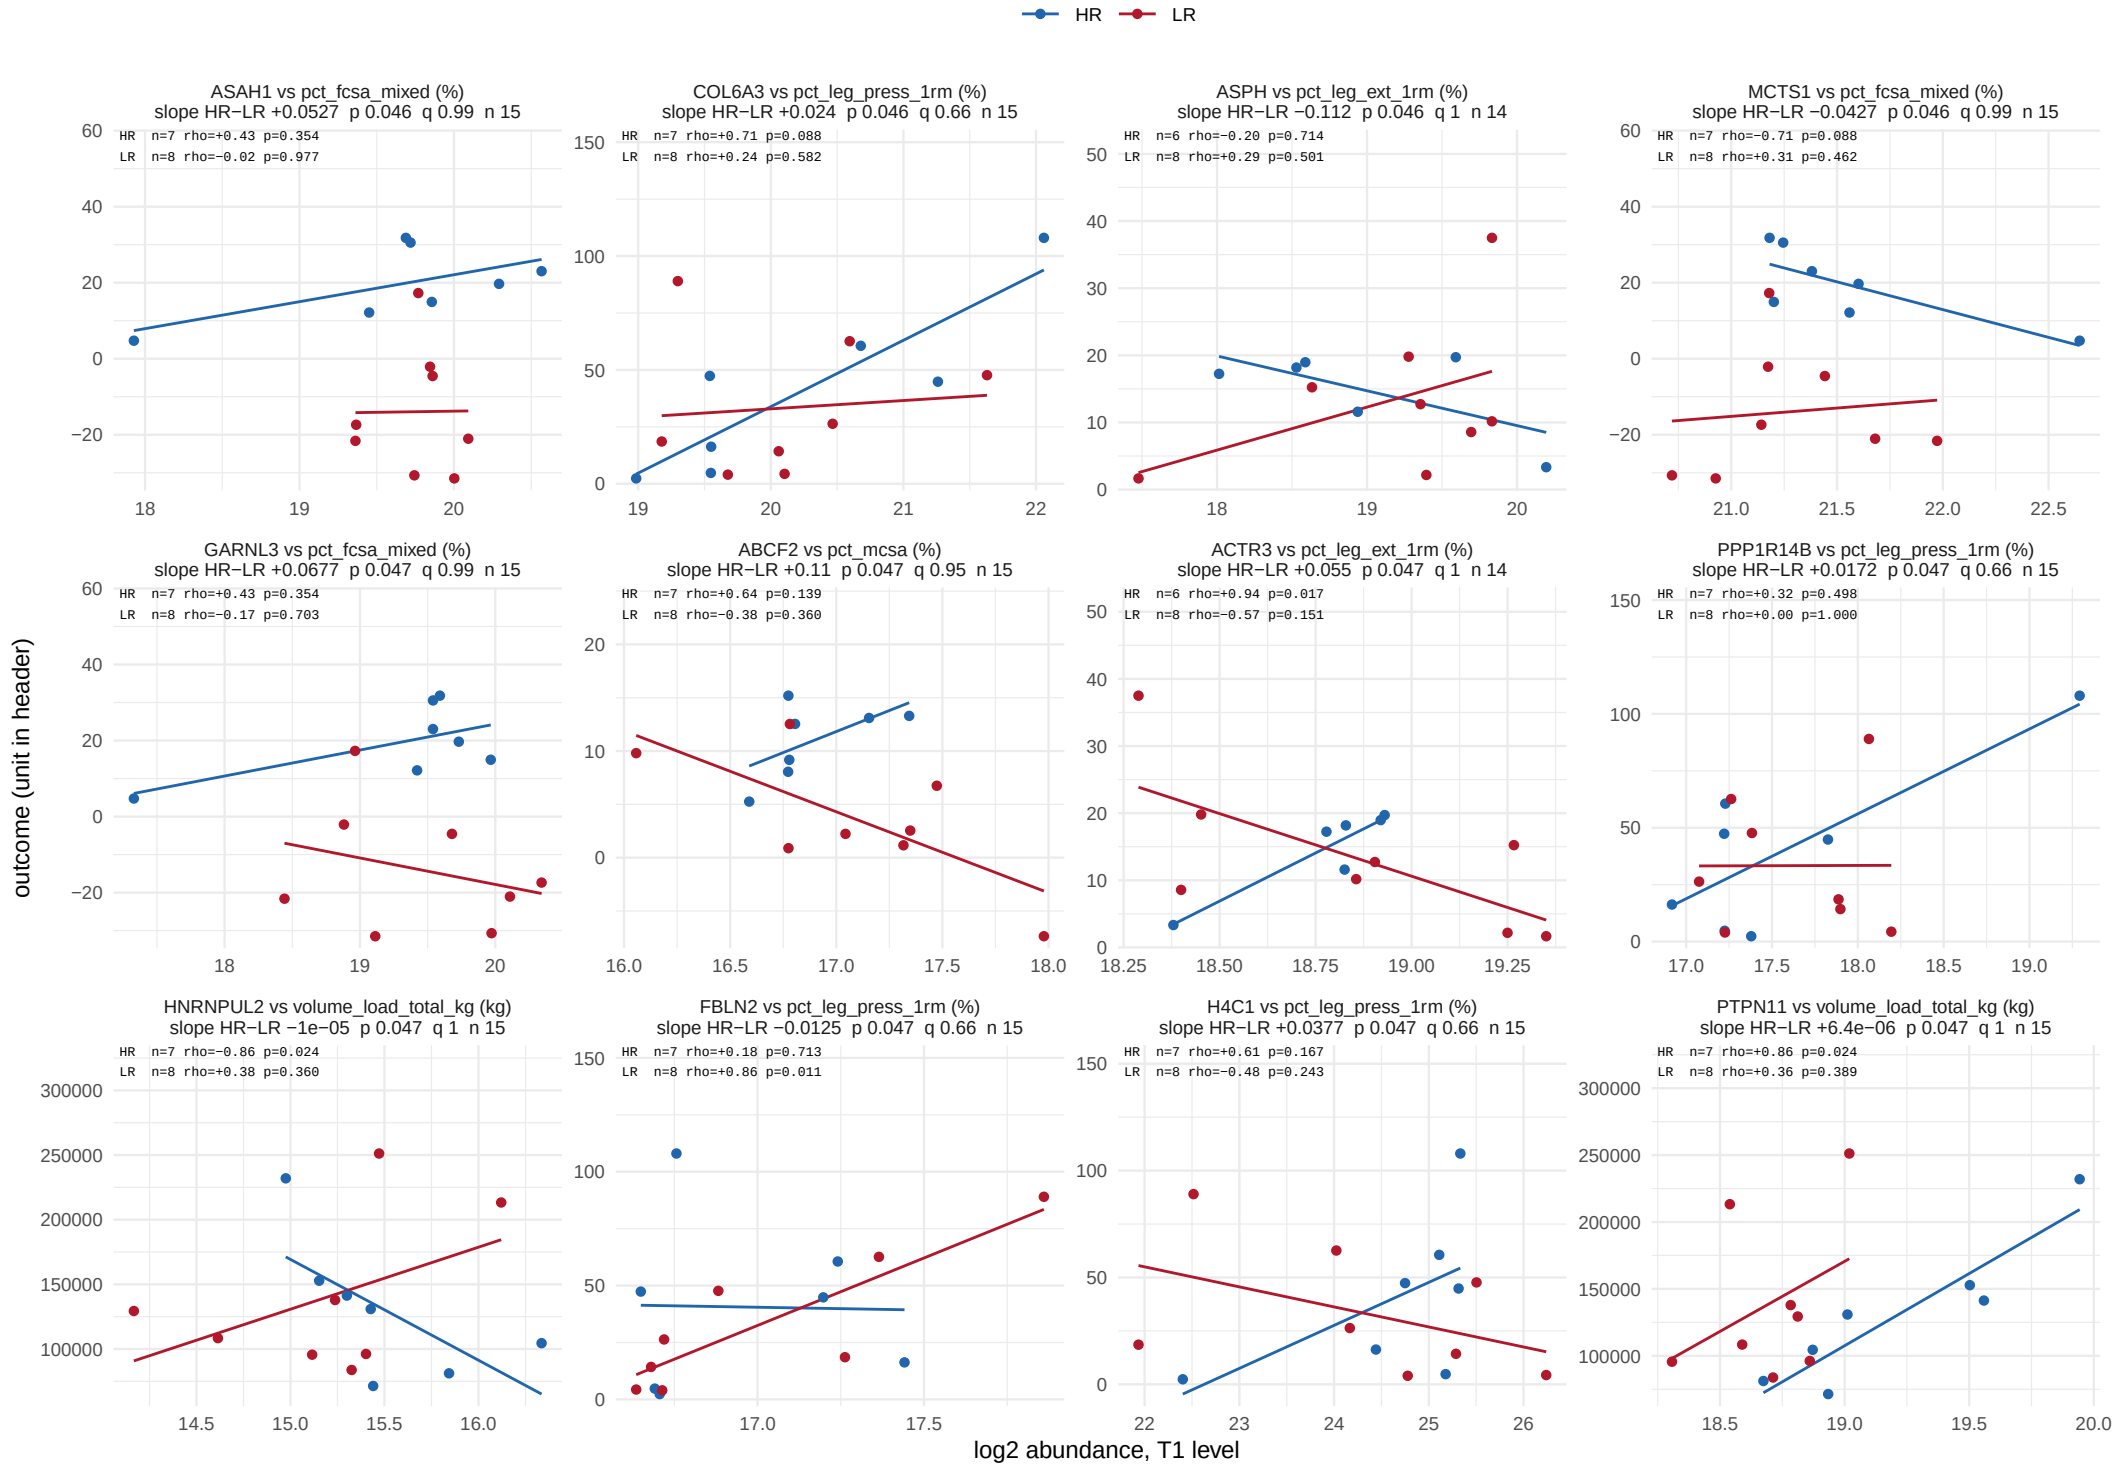

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


565 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 45 of 48.

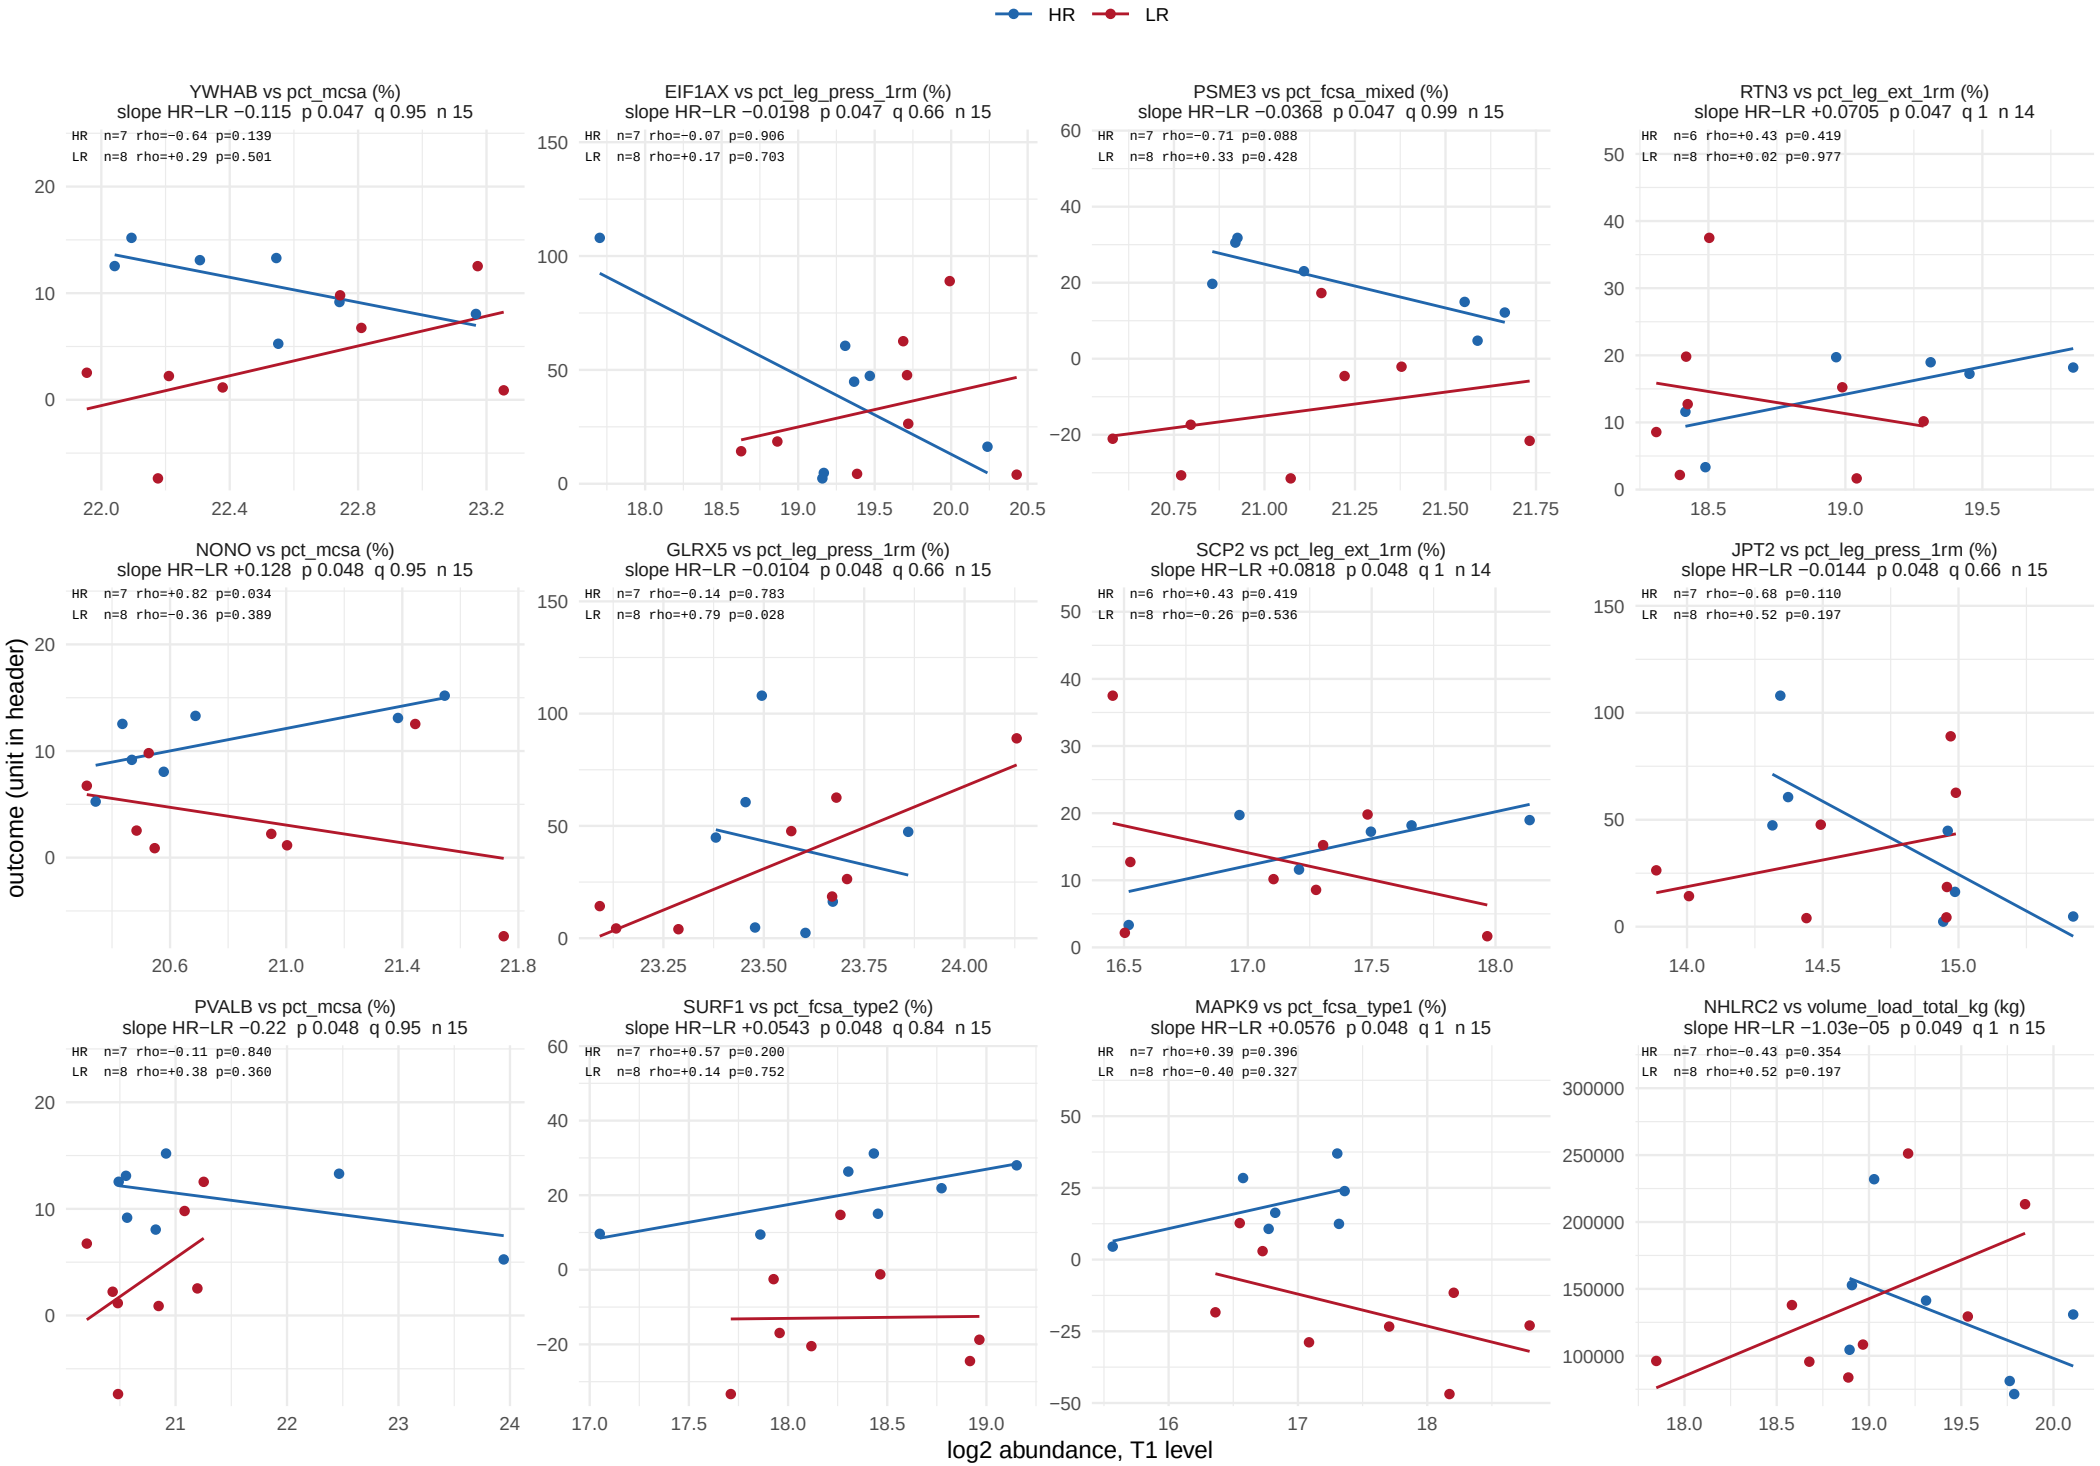

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


565 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 46 of 48.

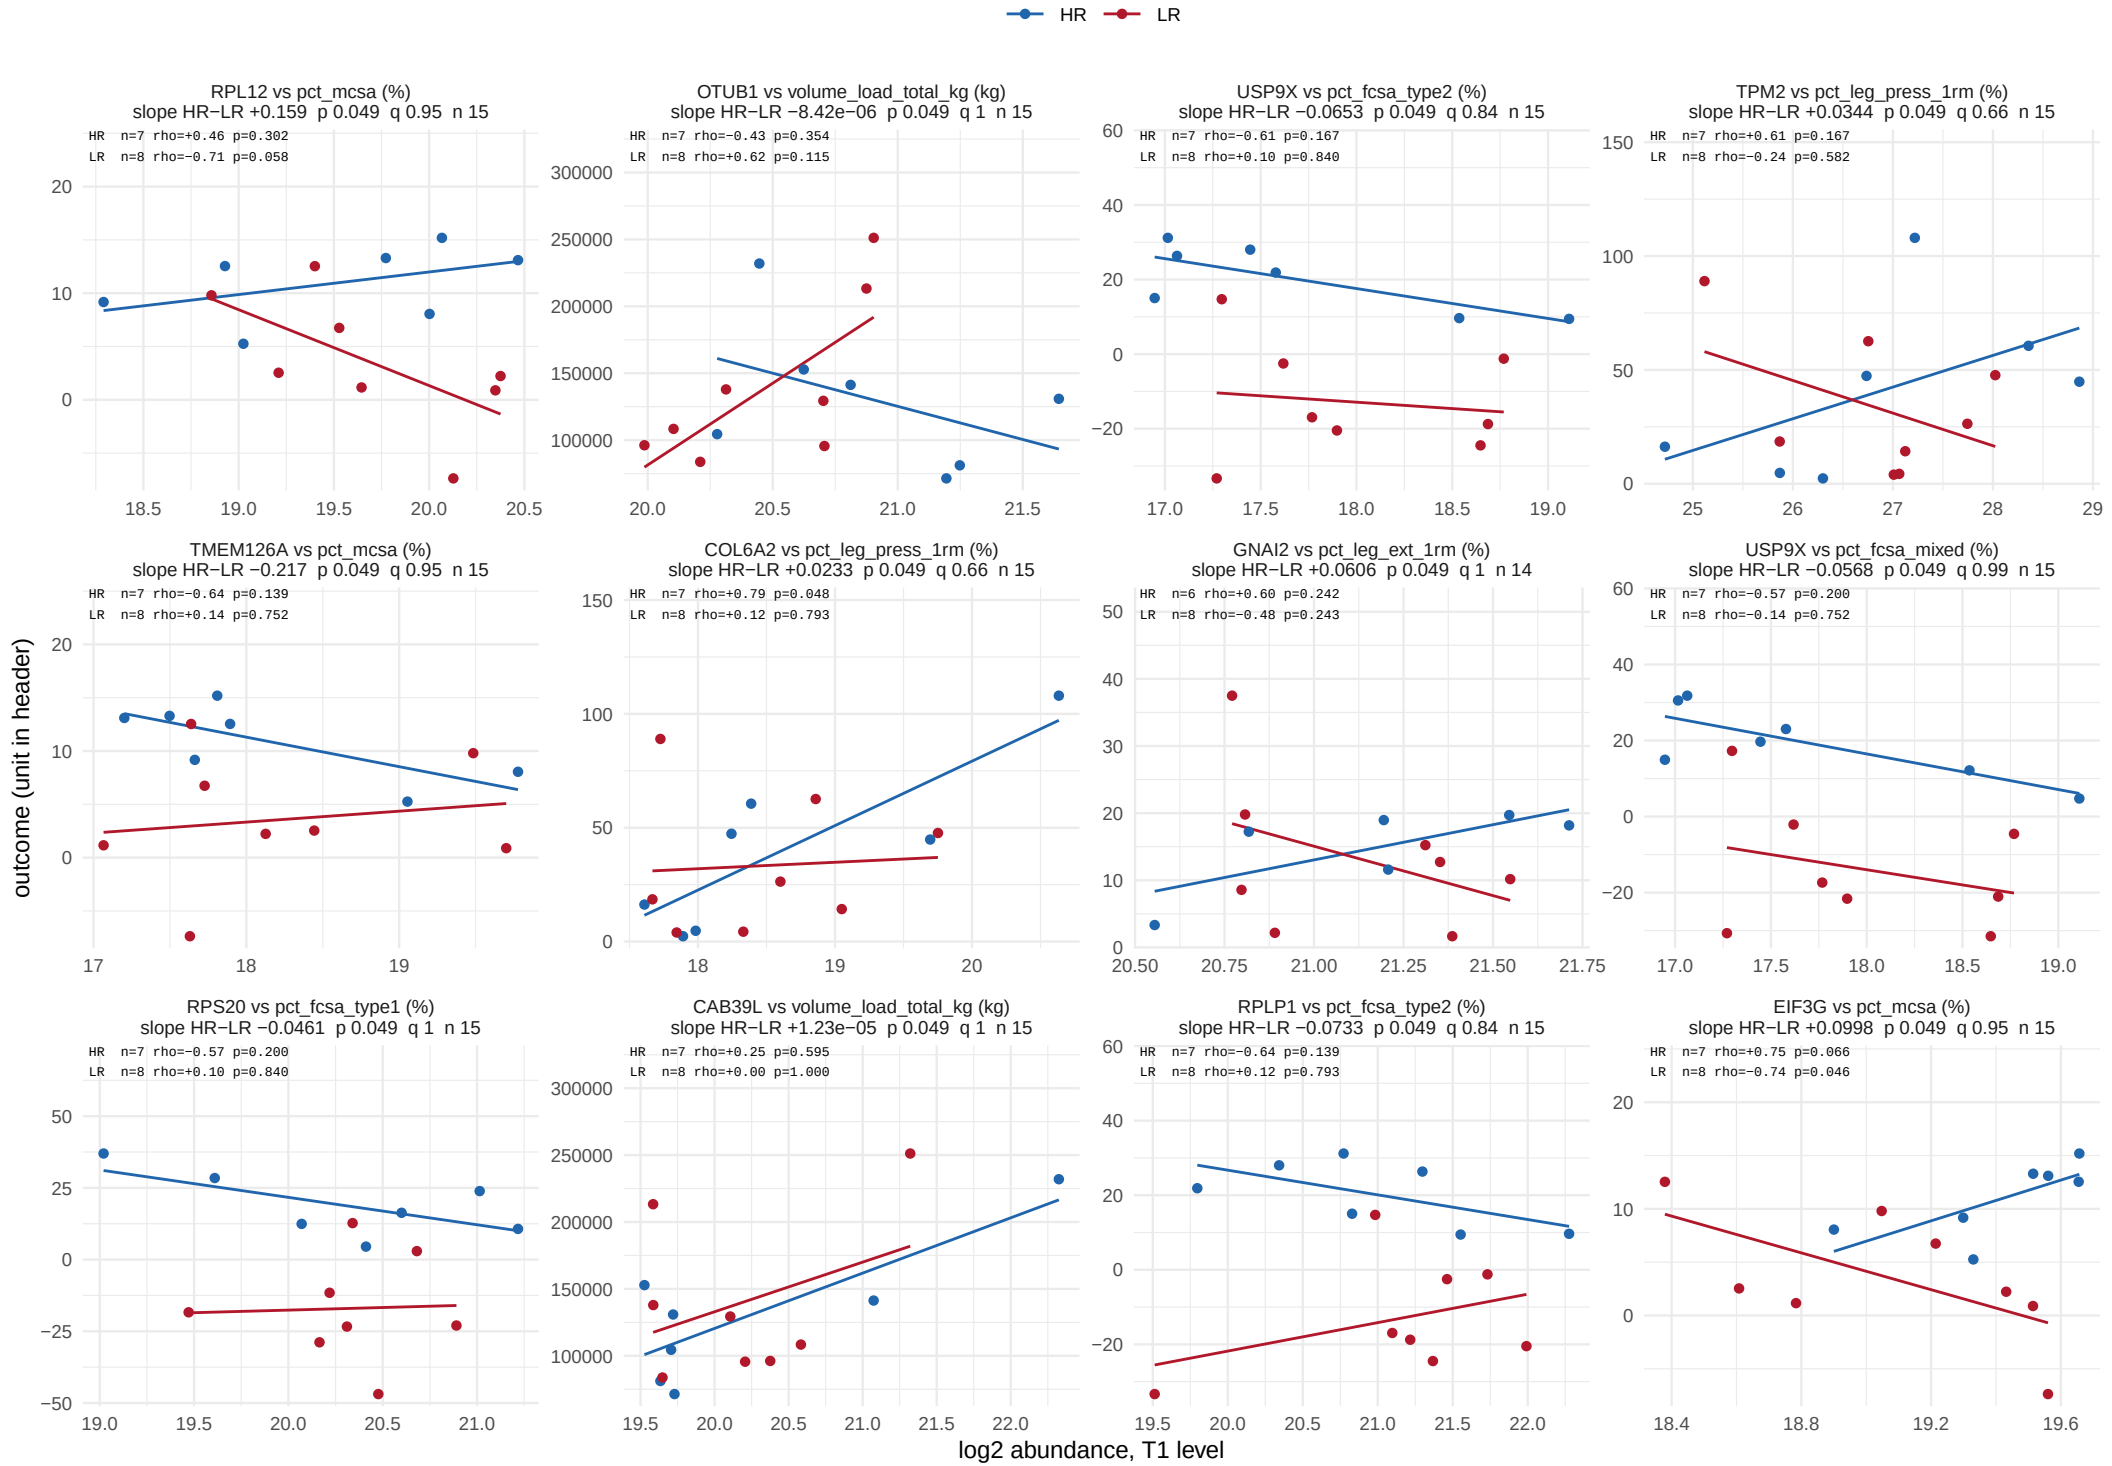

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


565 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 47 of 48.

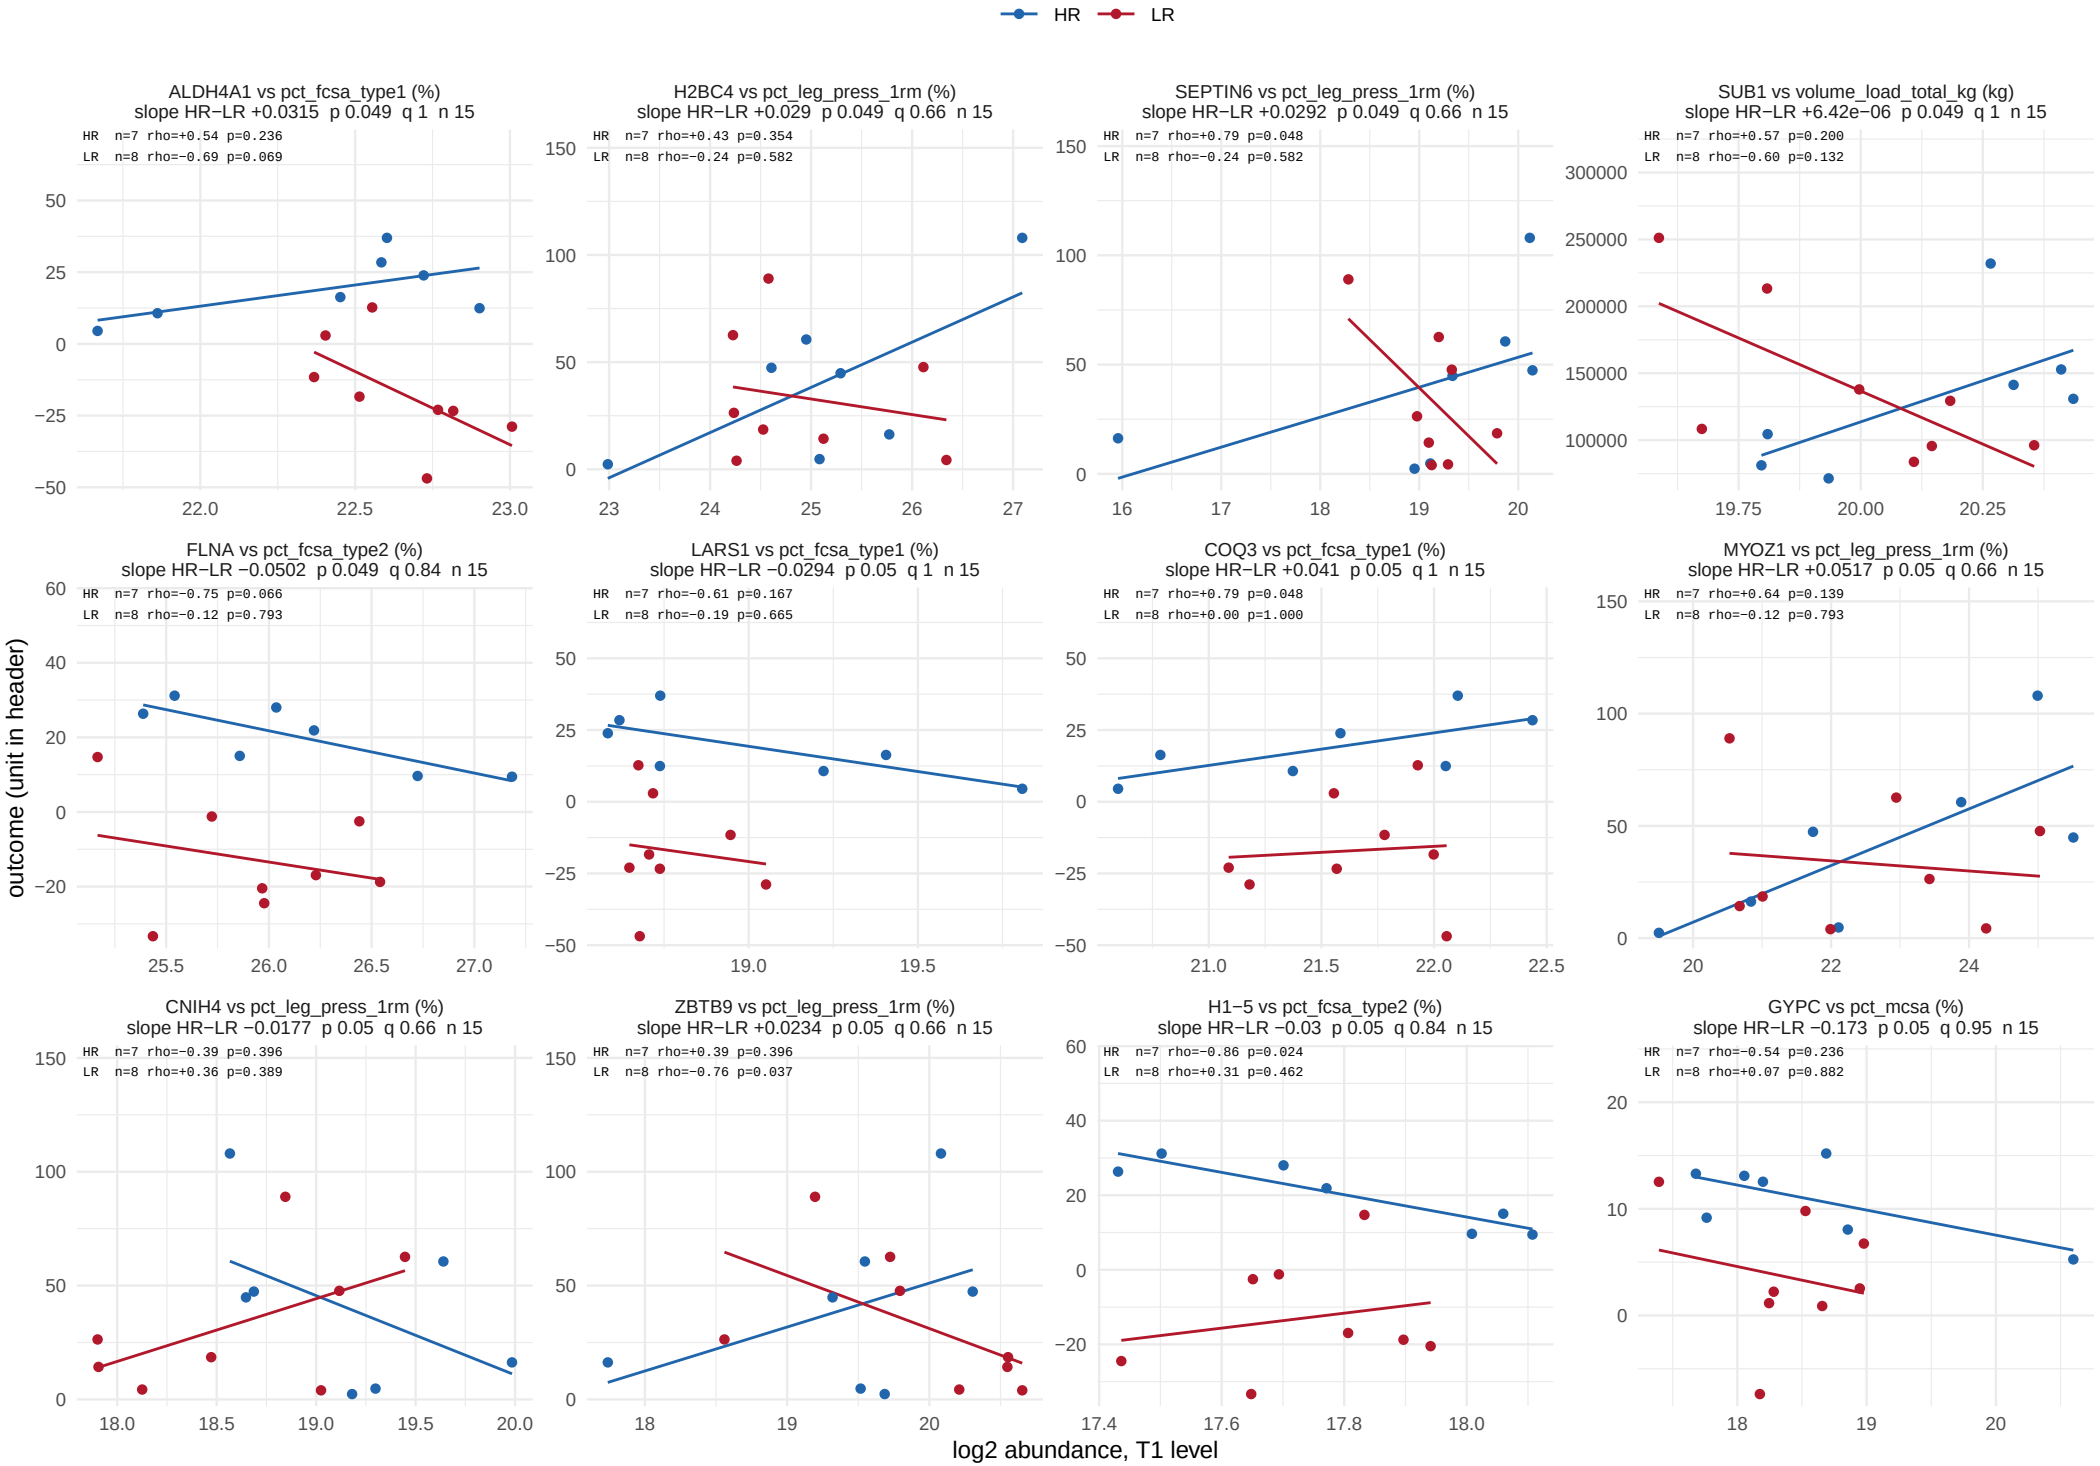

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


565 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 48 of 48.

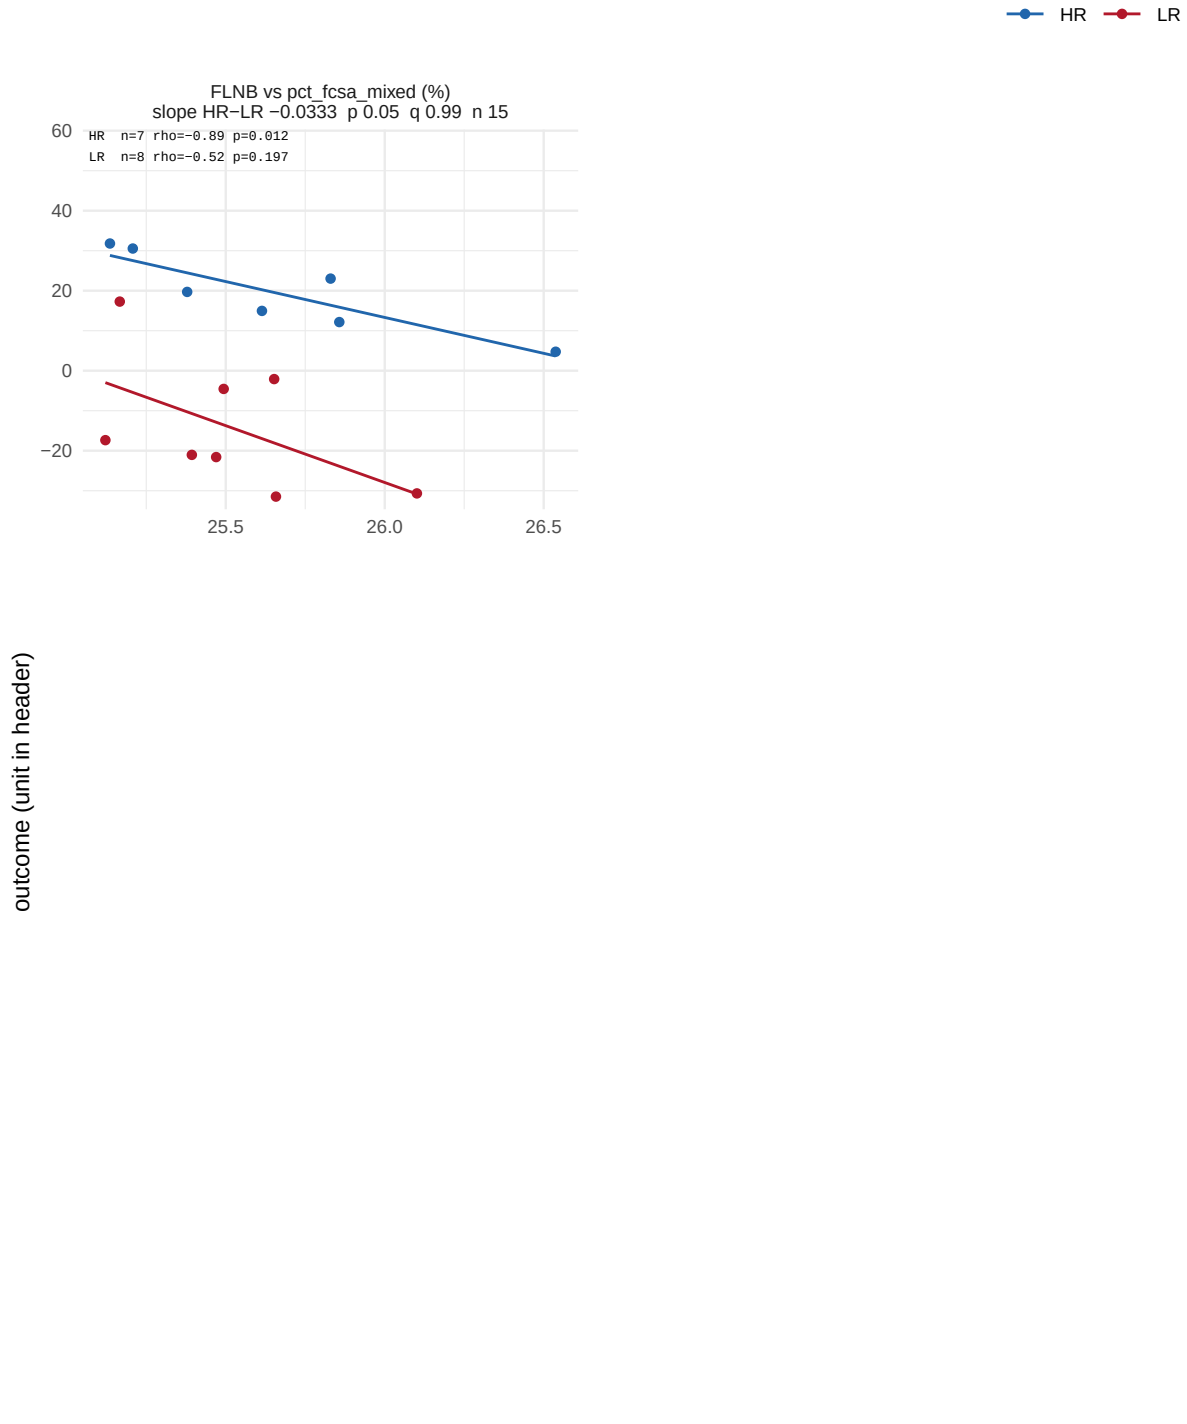

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


645 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 1 of 54.

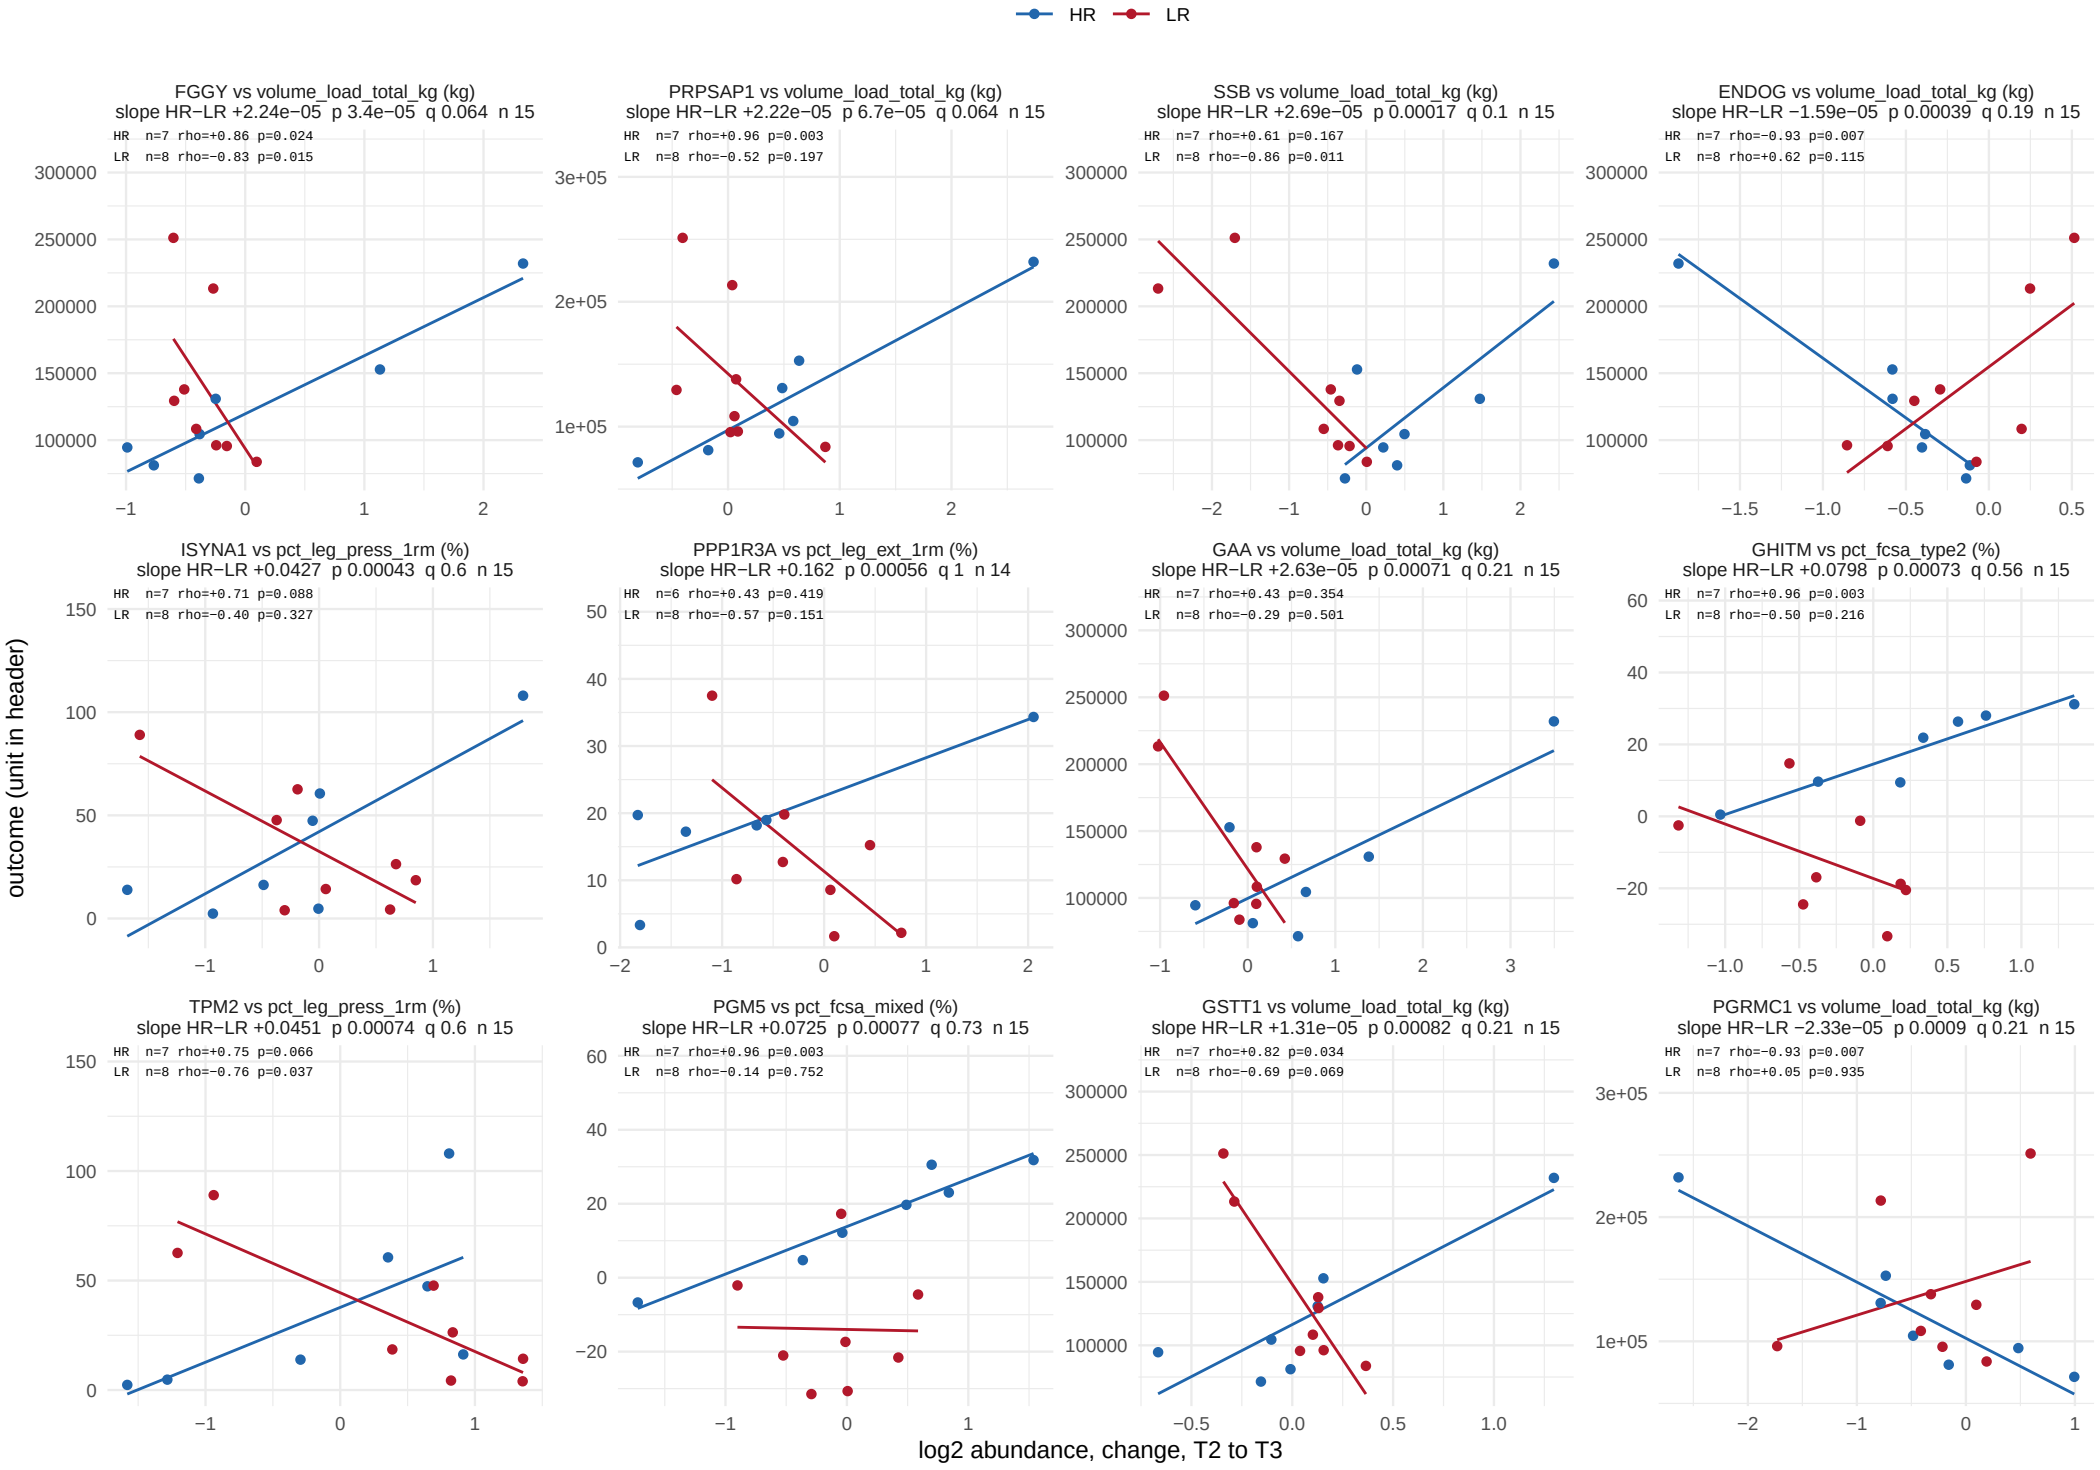

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


645 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 2 of 54.

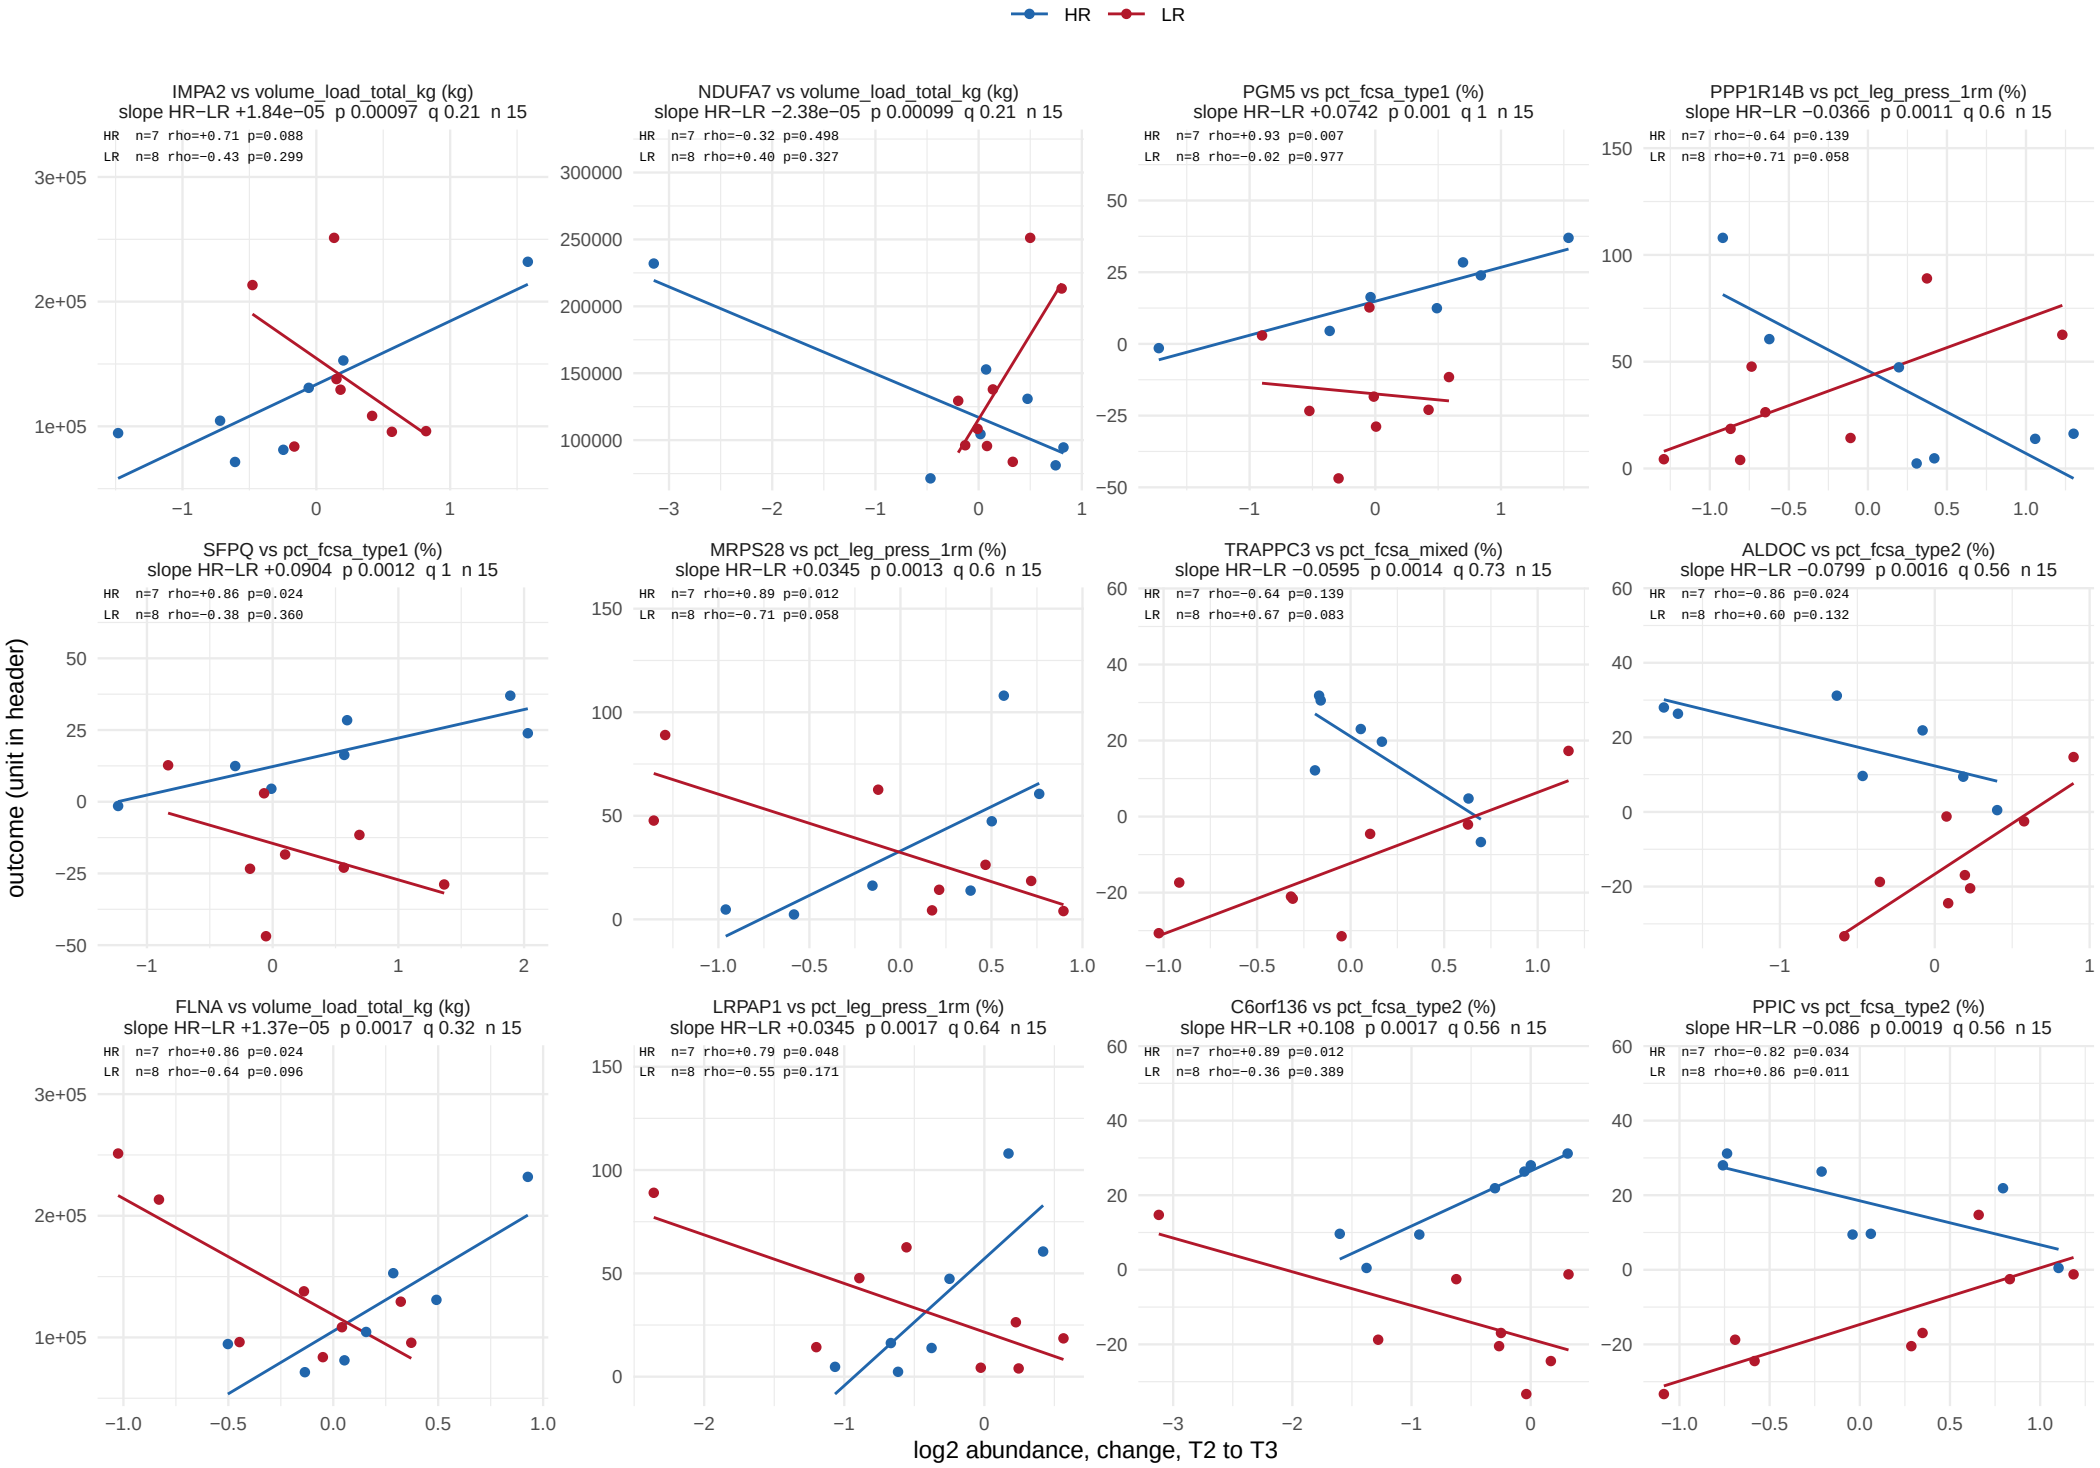

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


645 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 3 of 54.

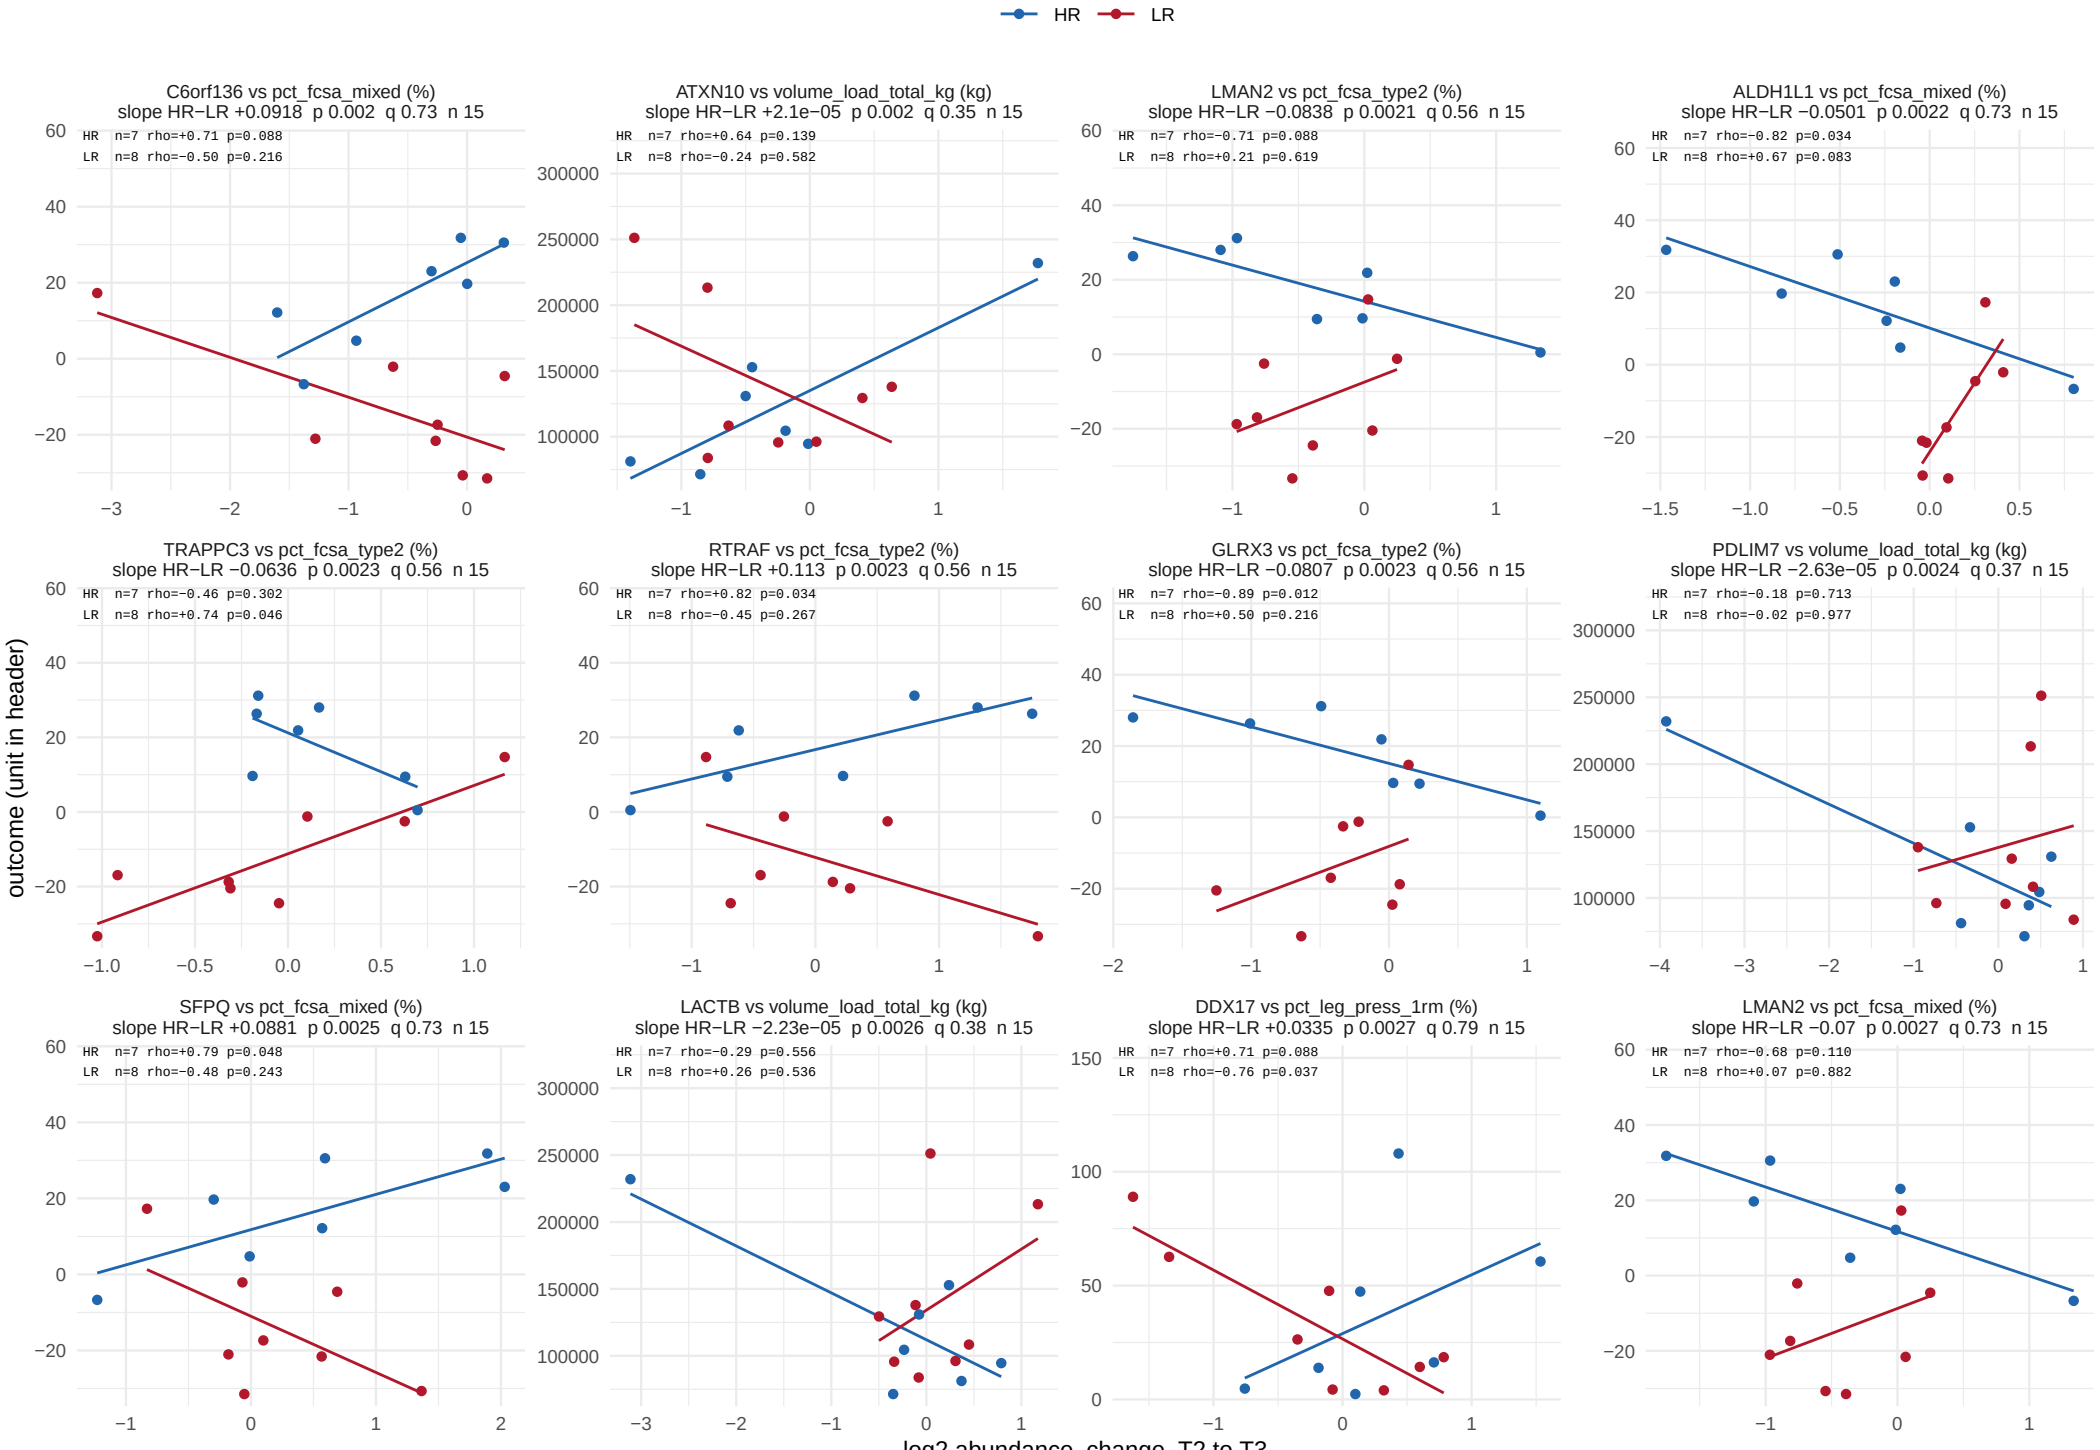

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


645 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 4 of 54.

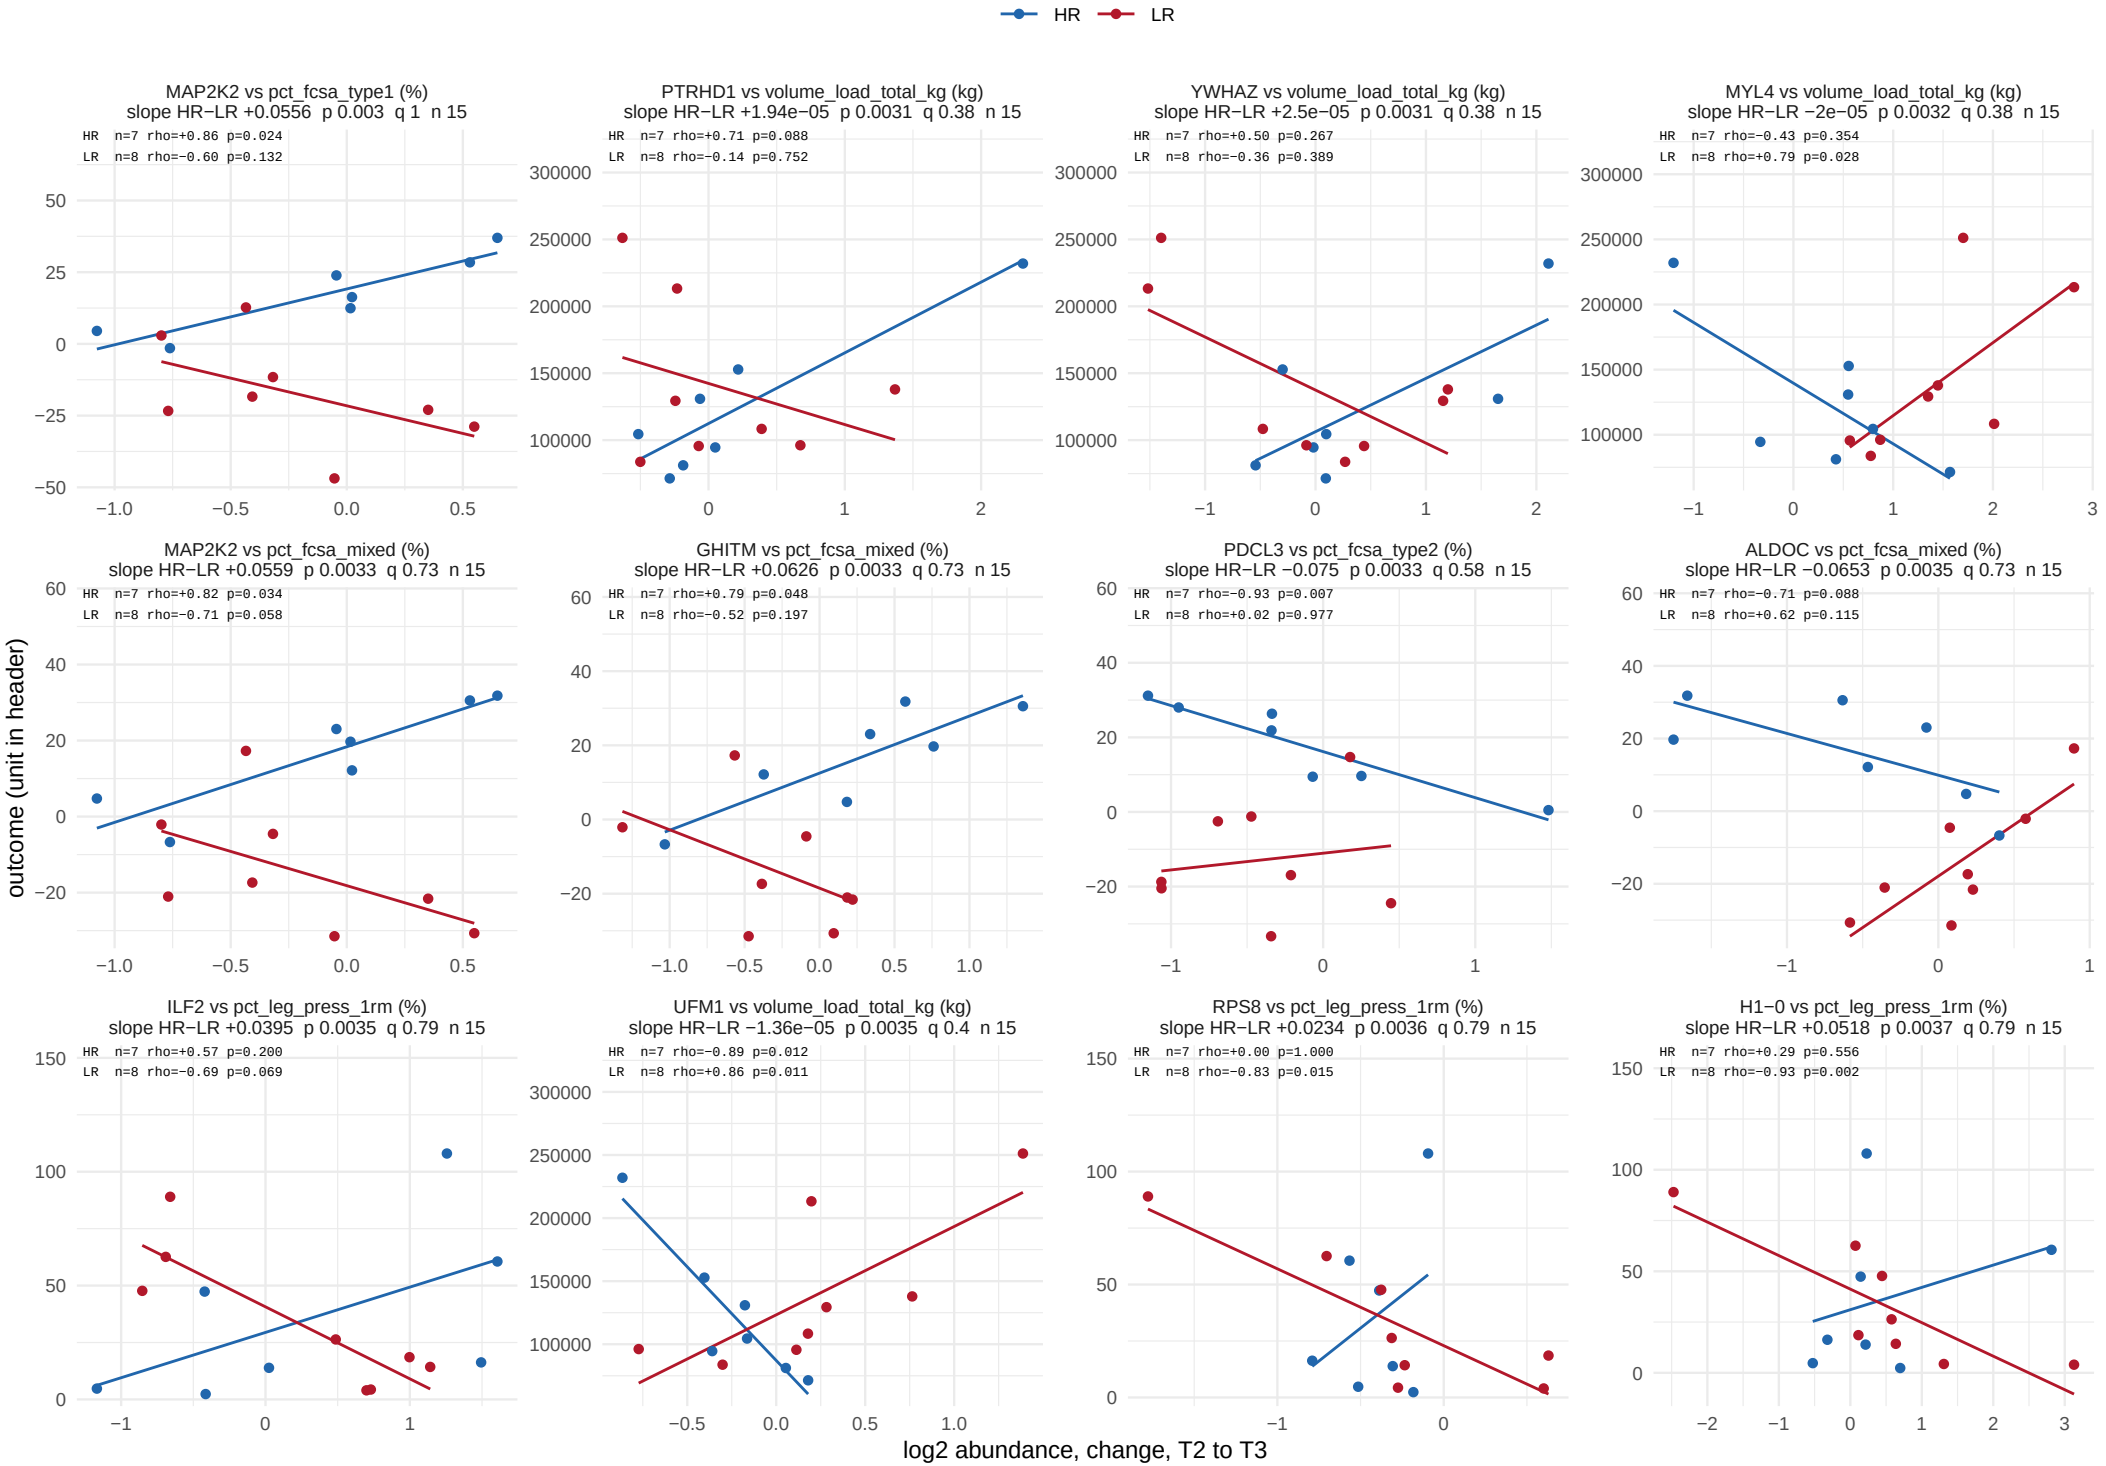

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


645 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 5 of 54.

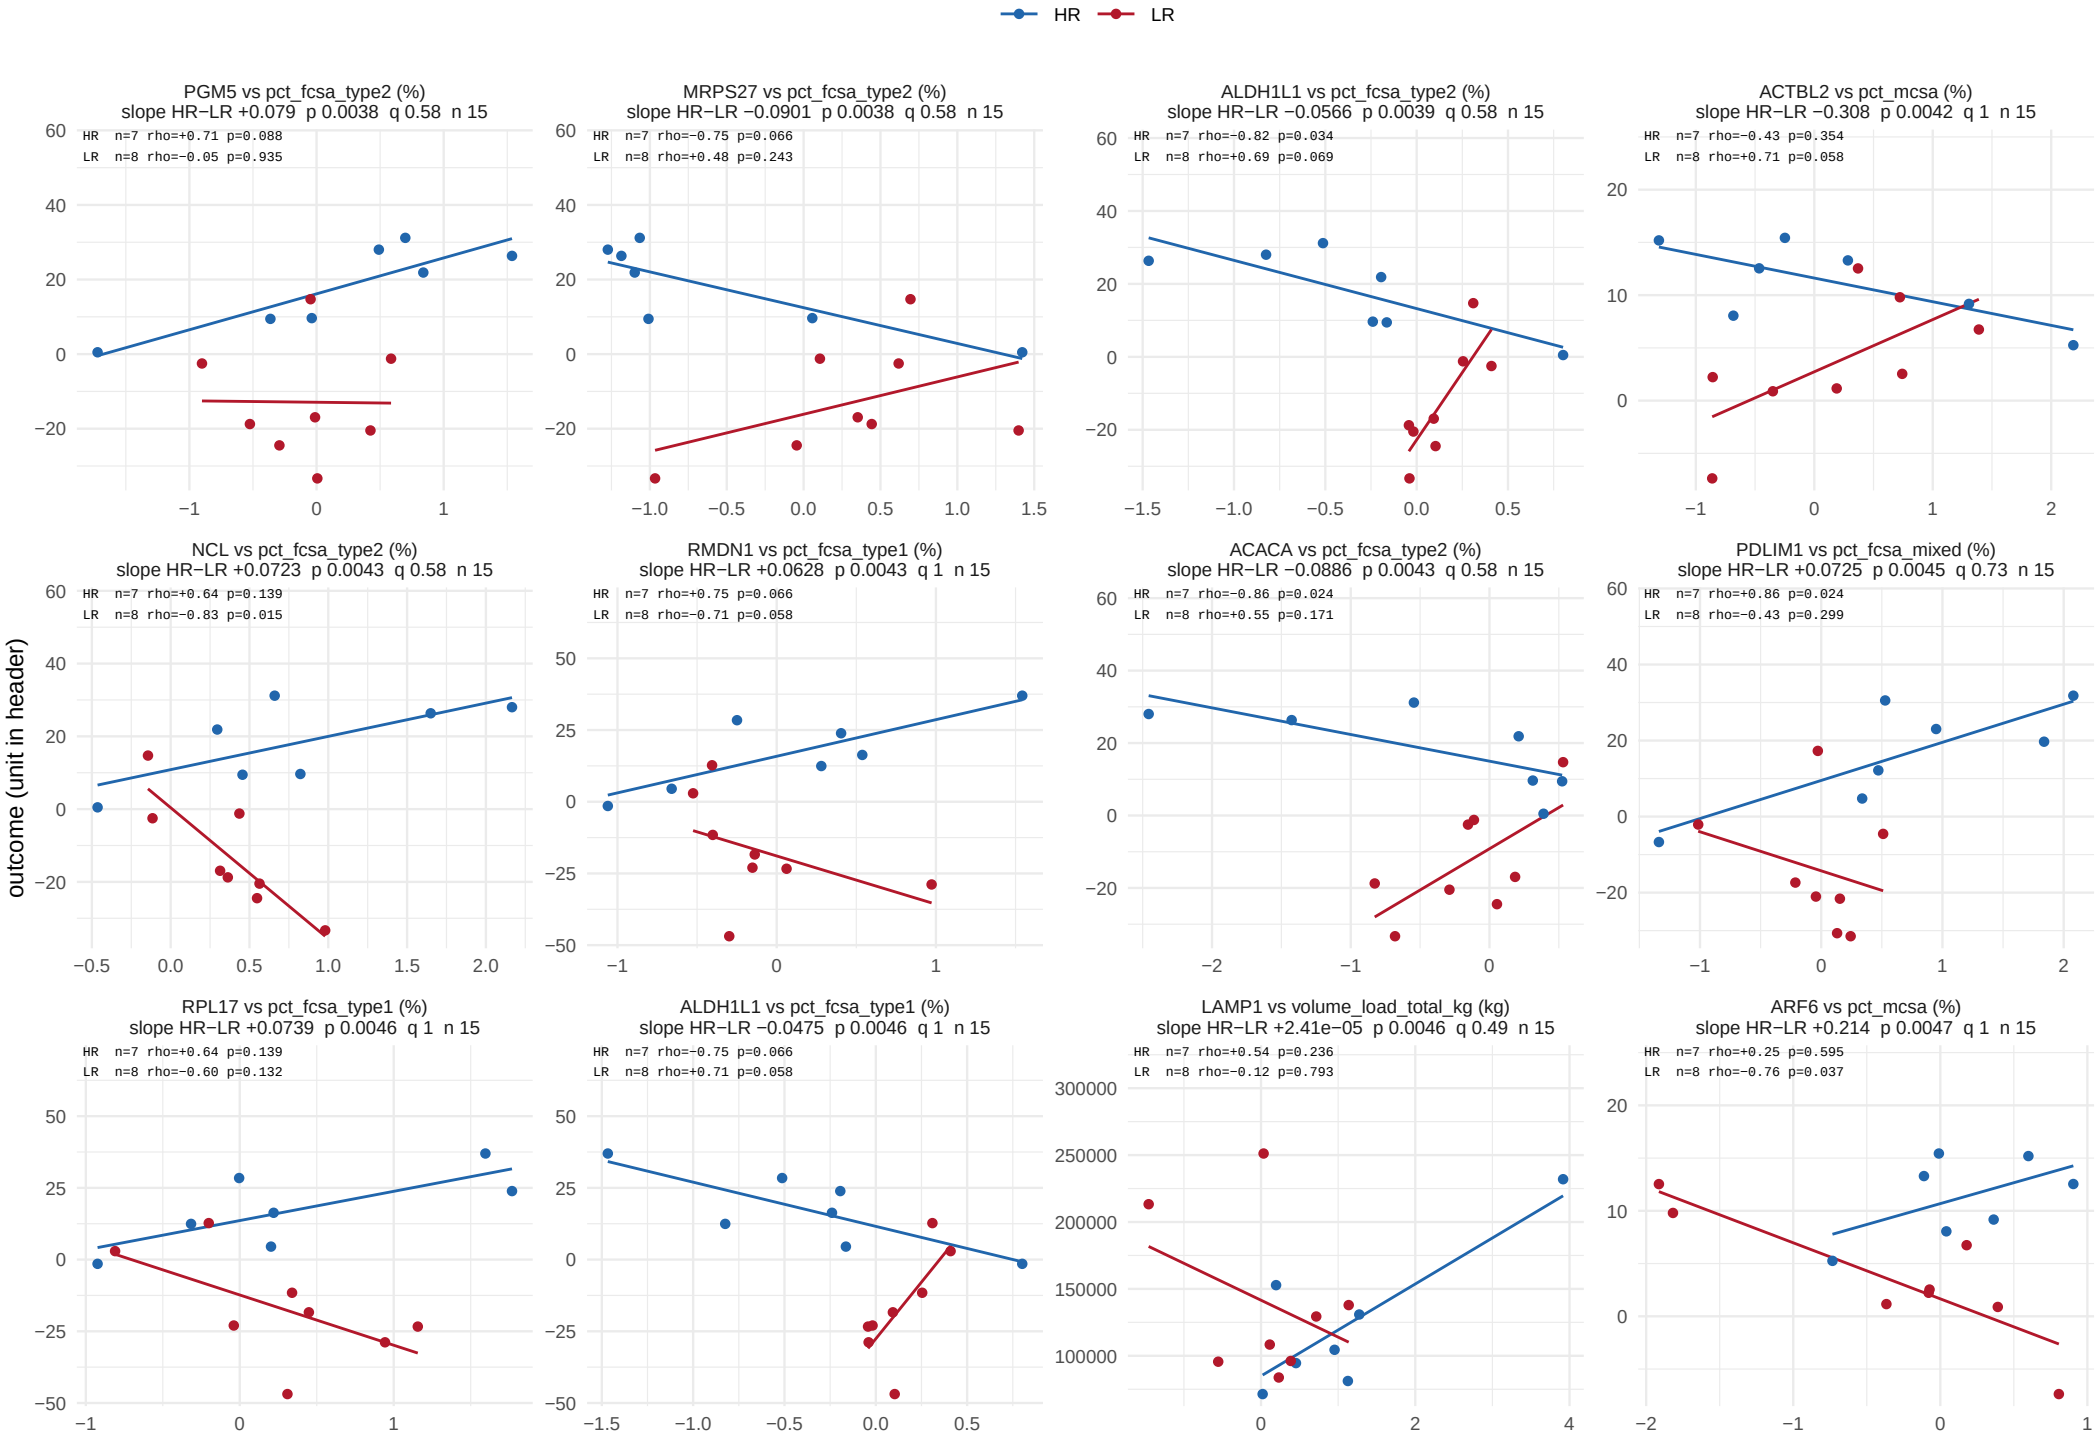

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


645 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 6 of 54.

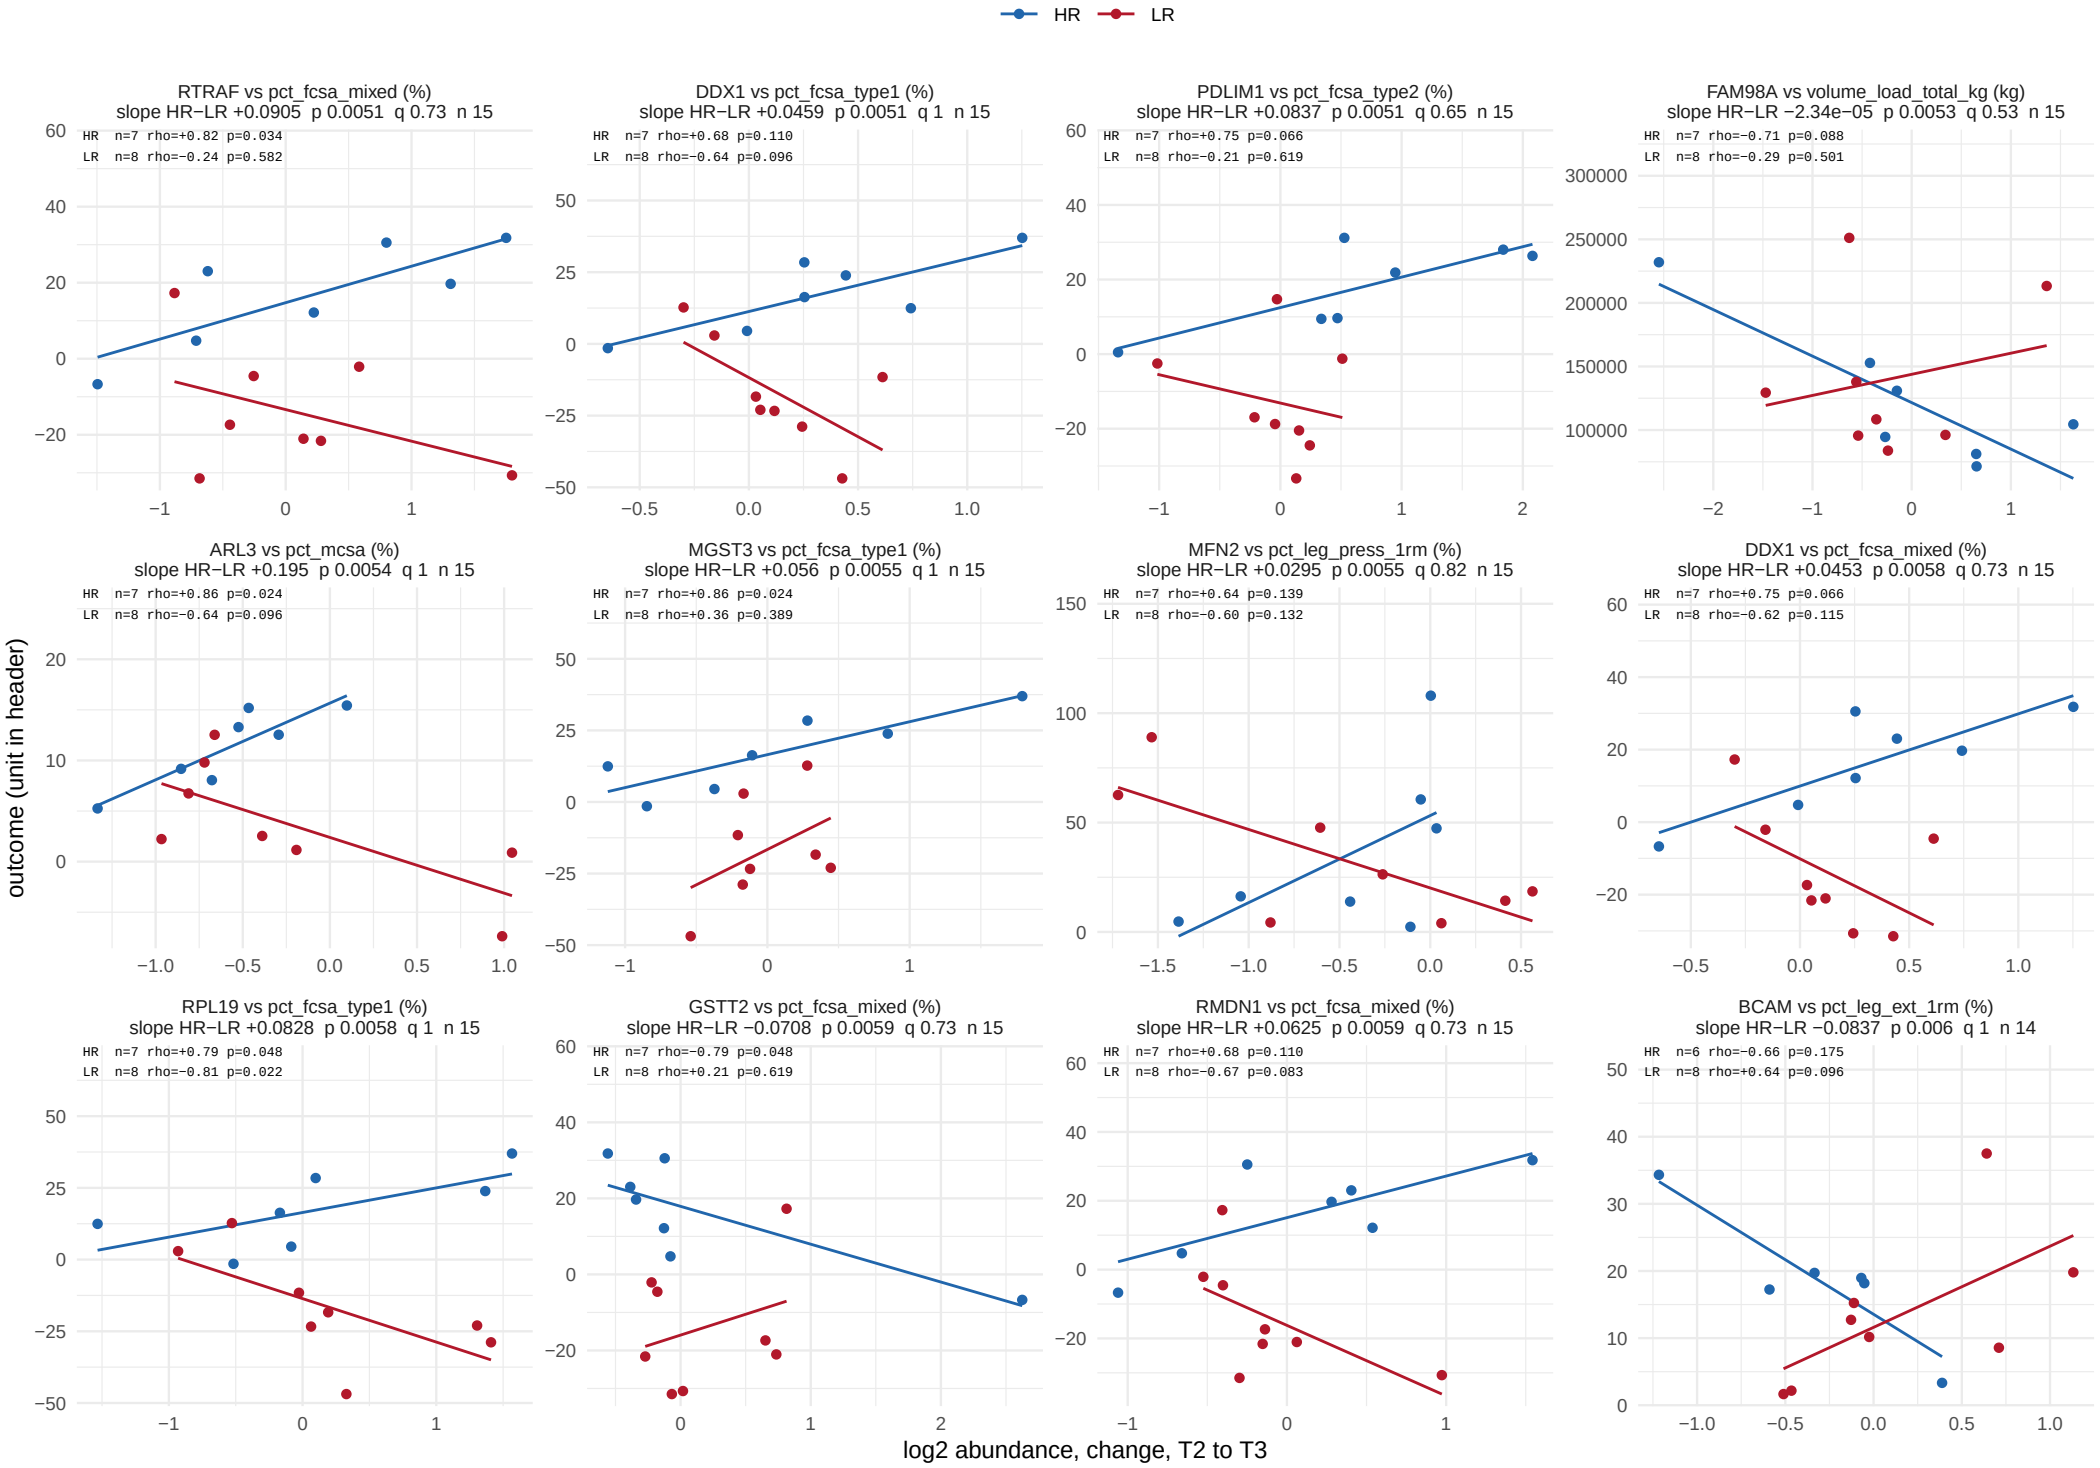

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window

645 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 7 of 54.

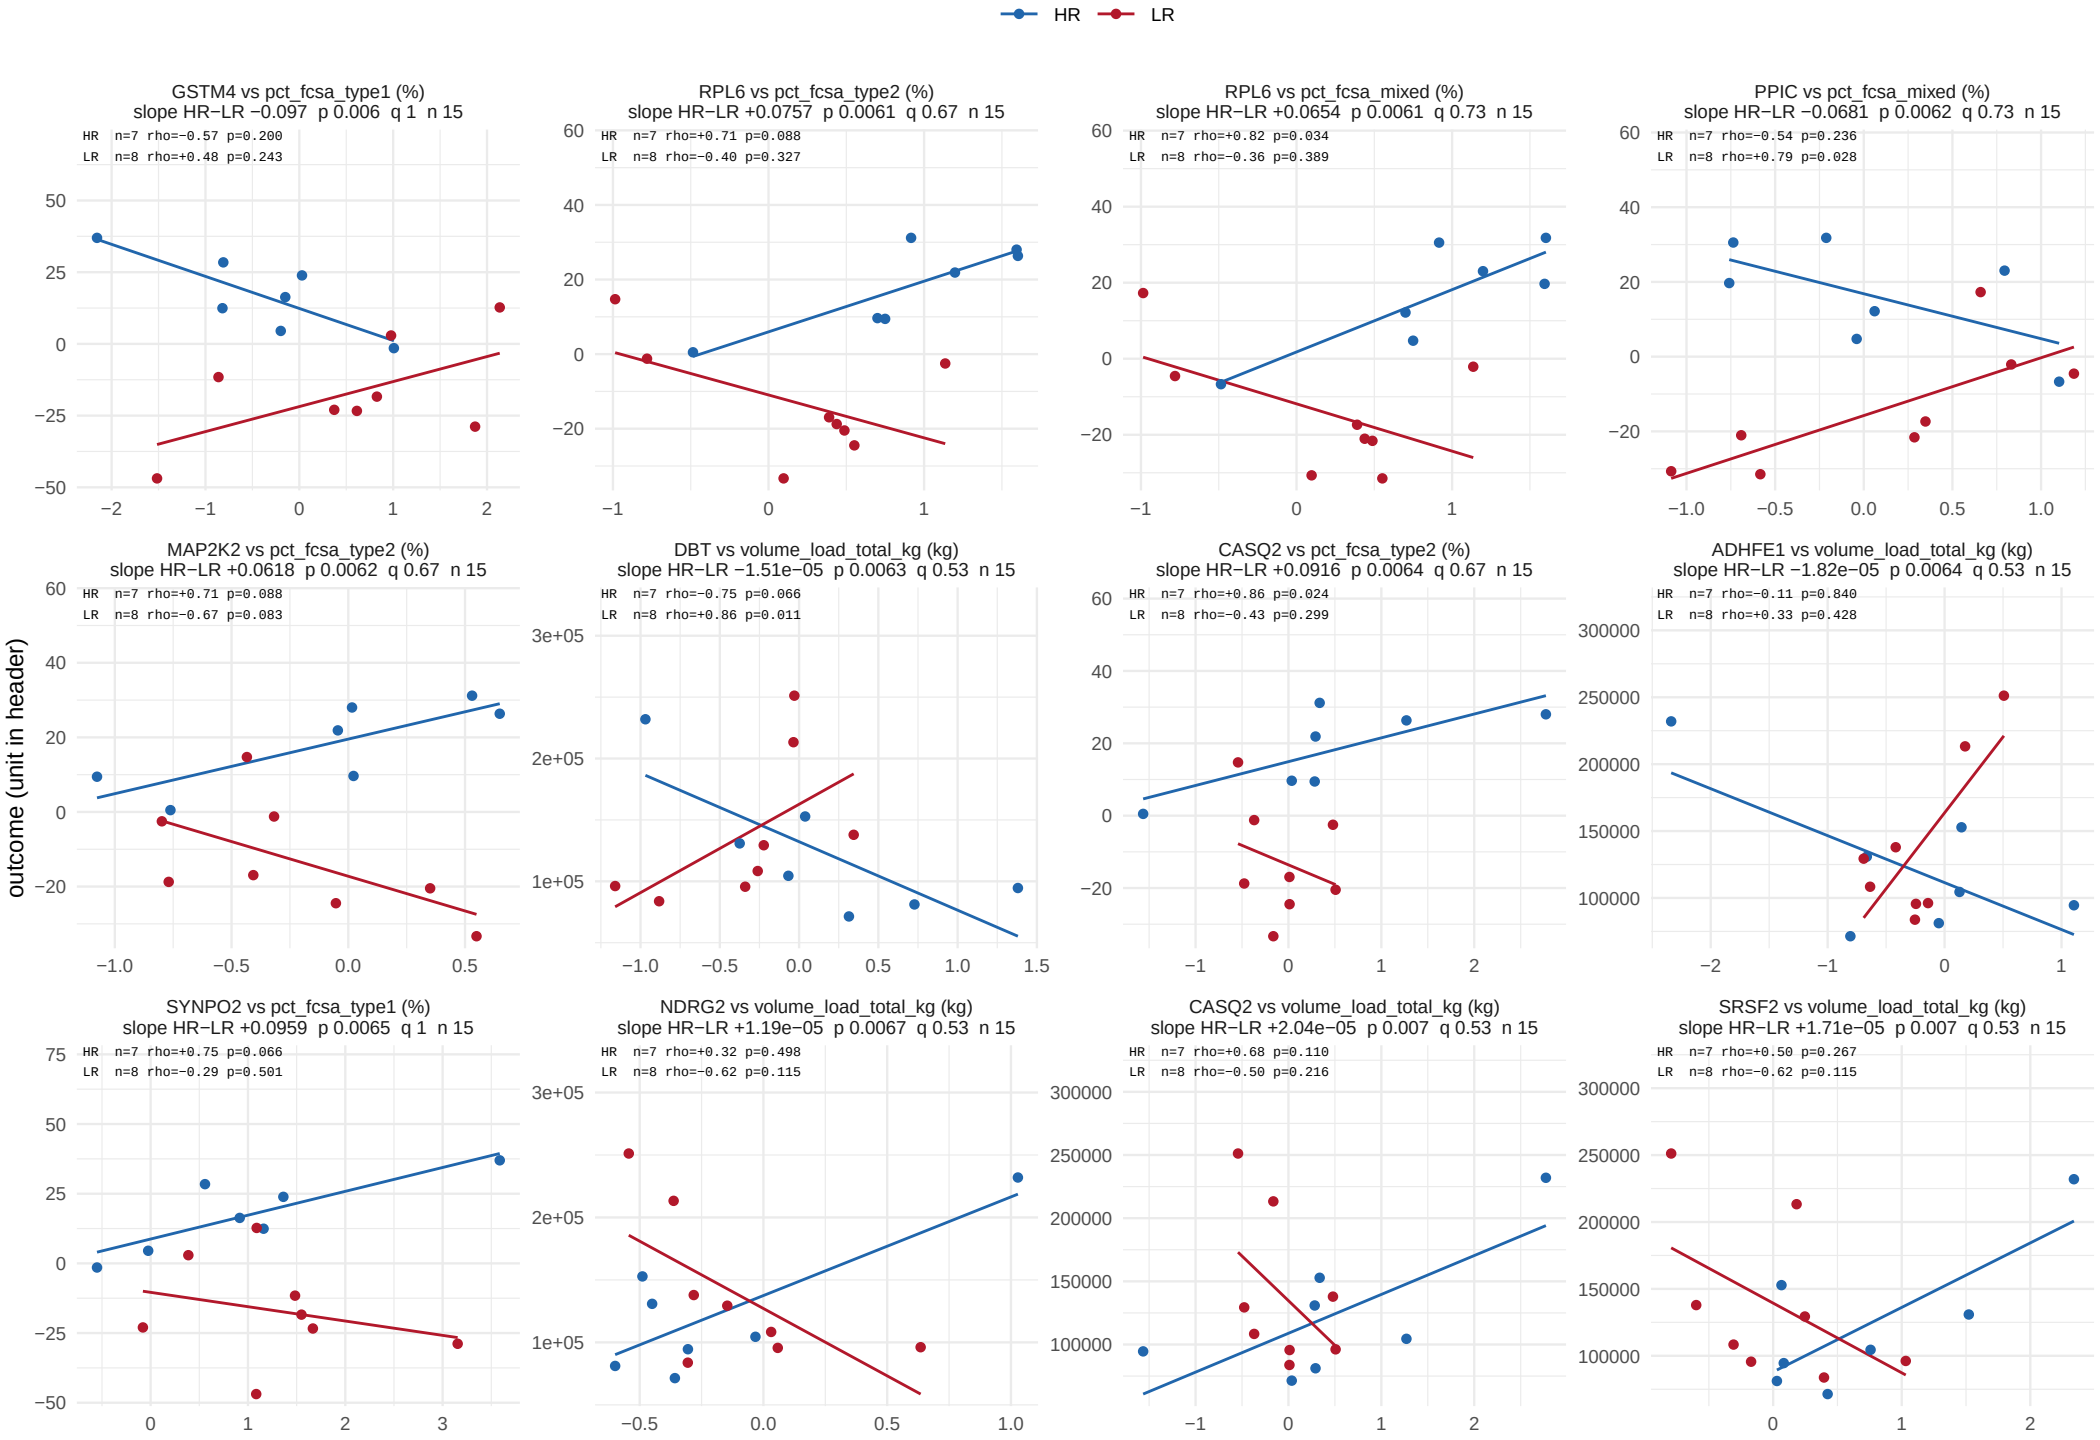

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


645 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 8 of 54.



One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


645 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 9 of 54.

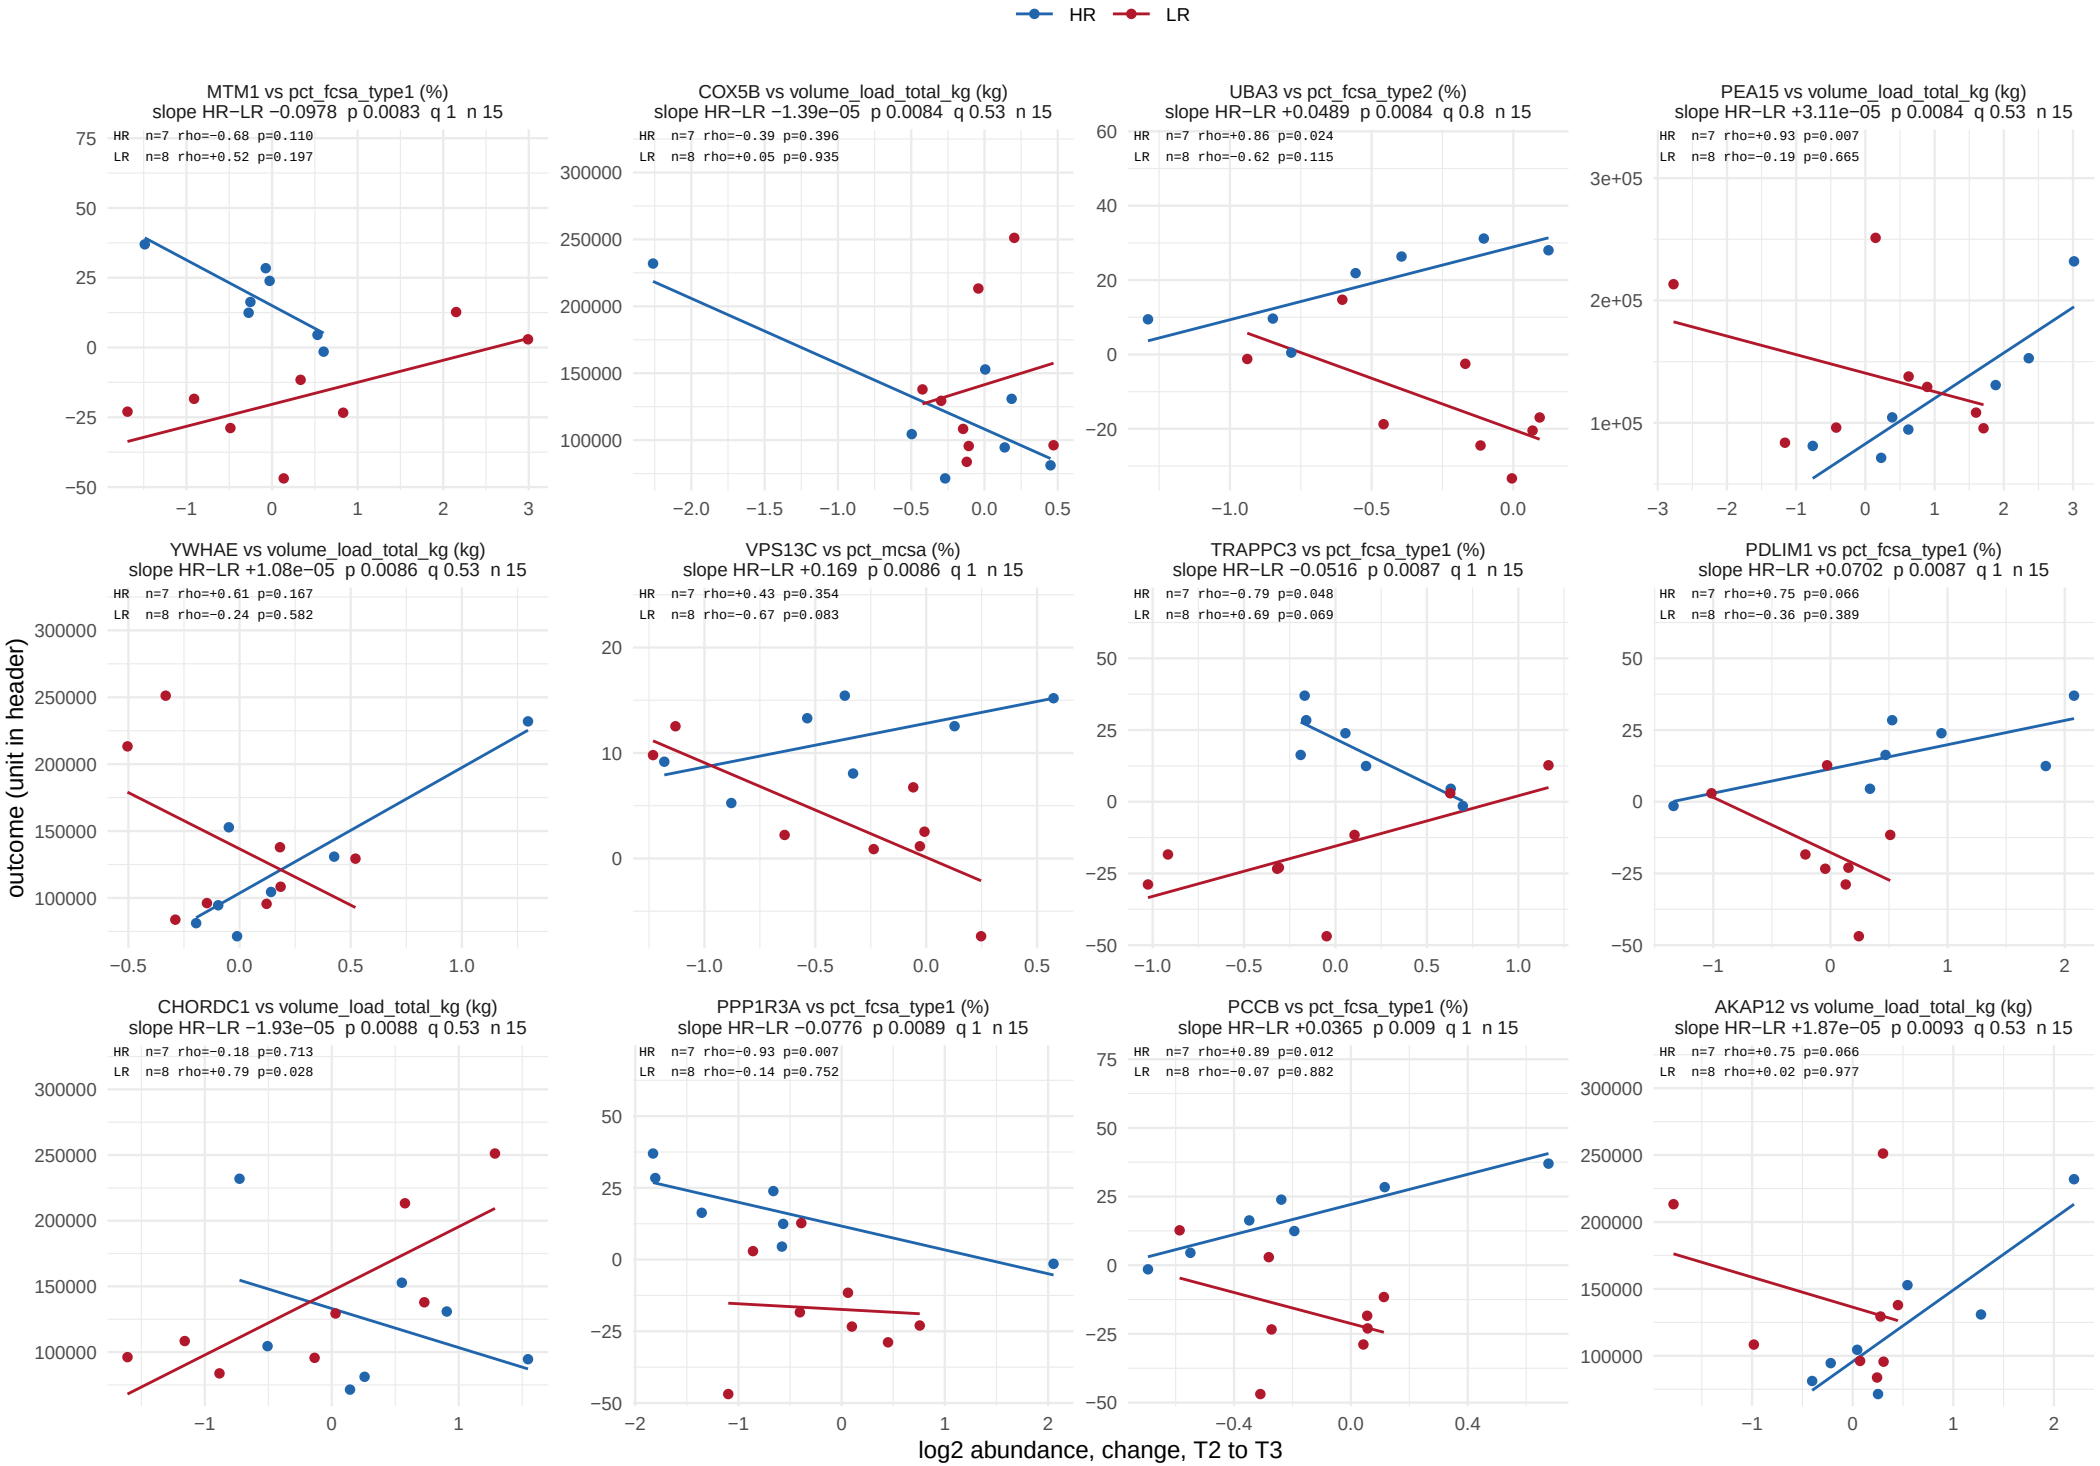

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


645 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 10 of 54.

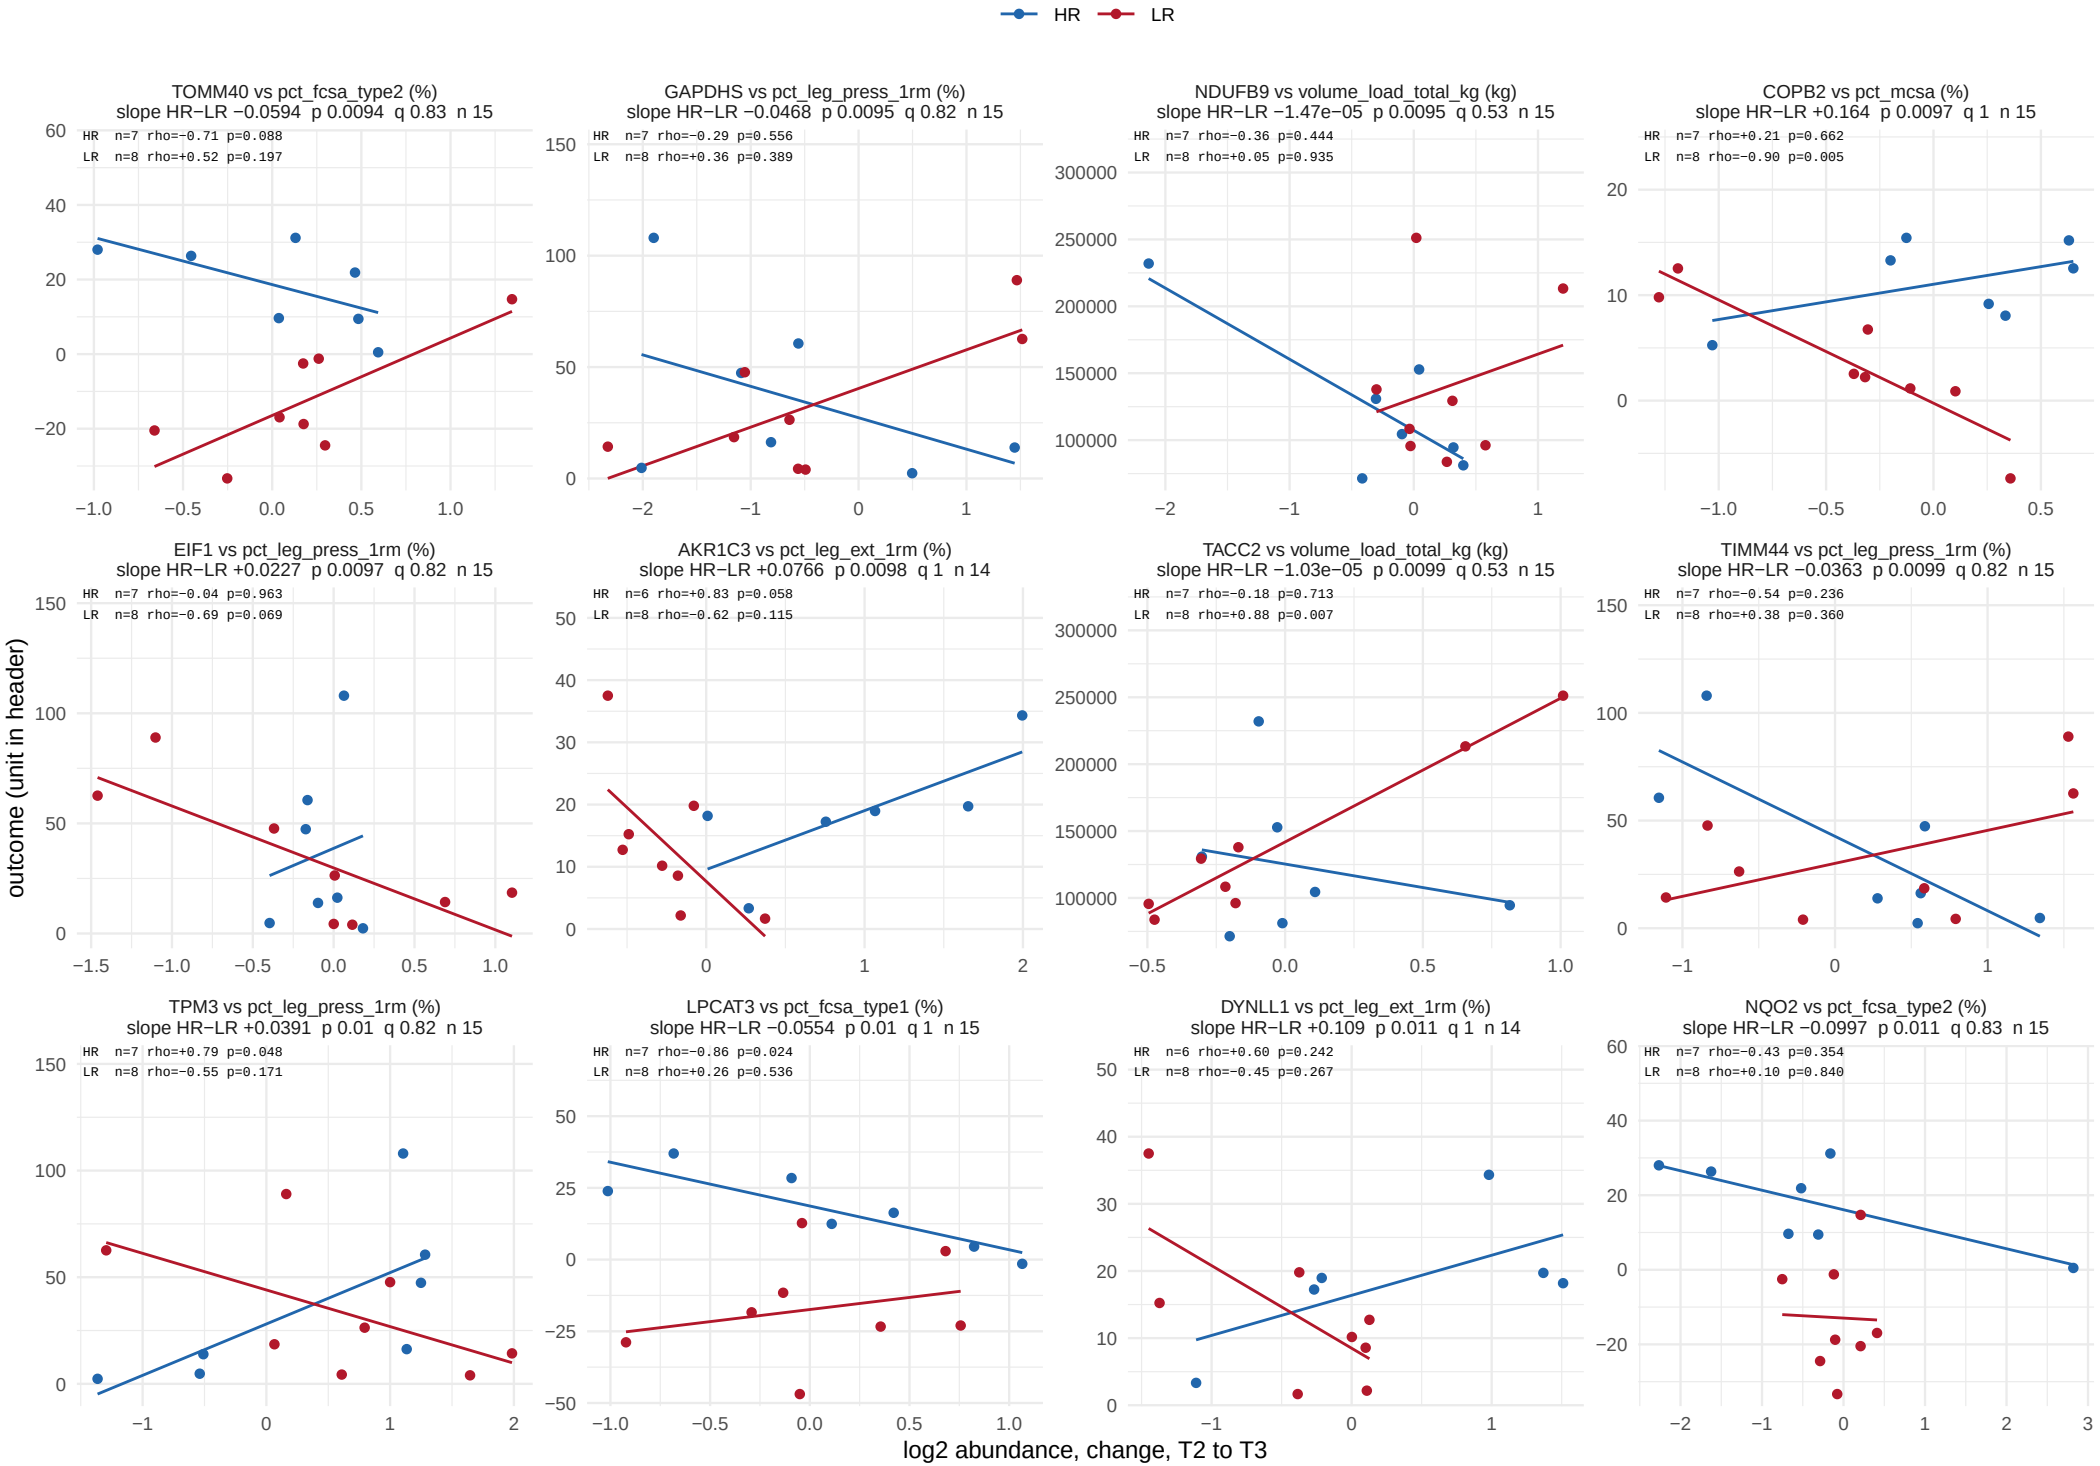

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


645 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 11 of 54.

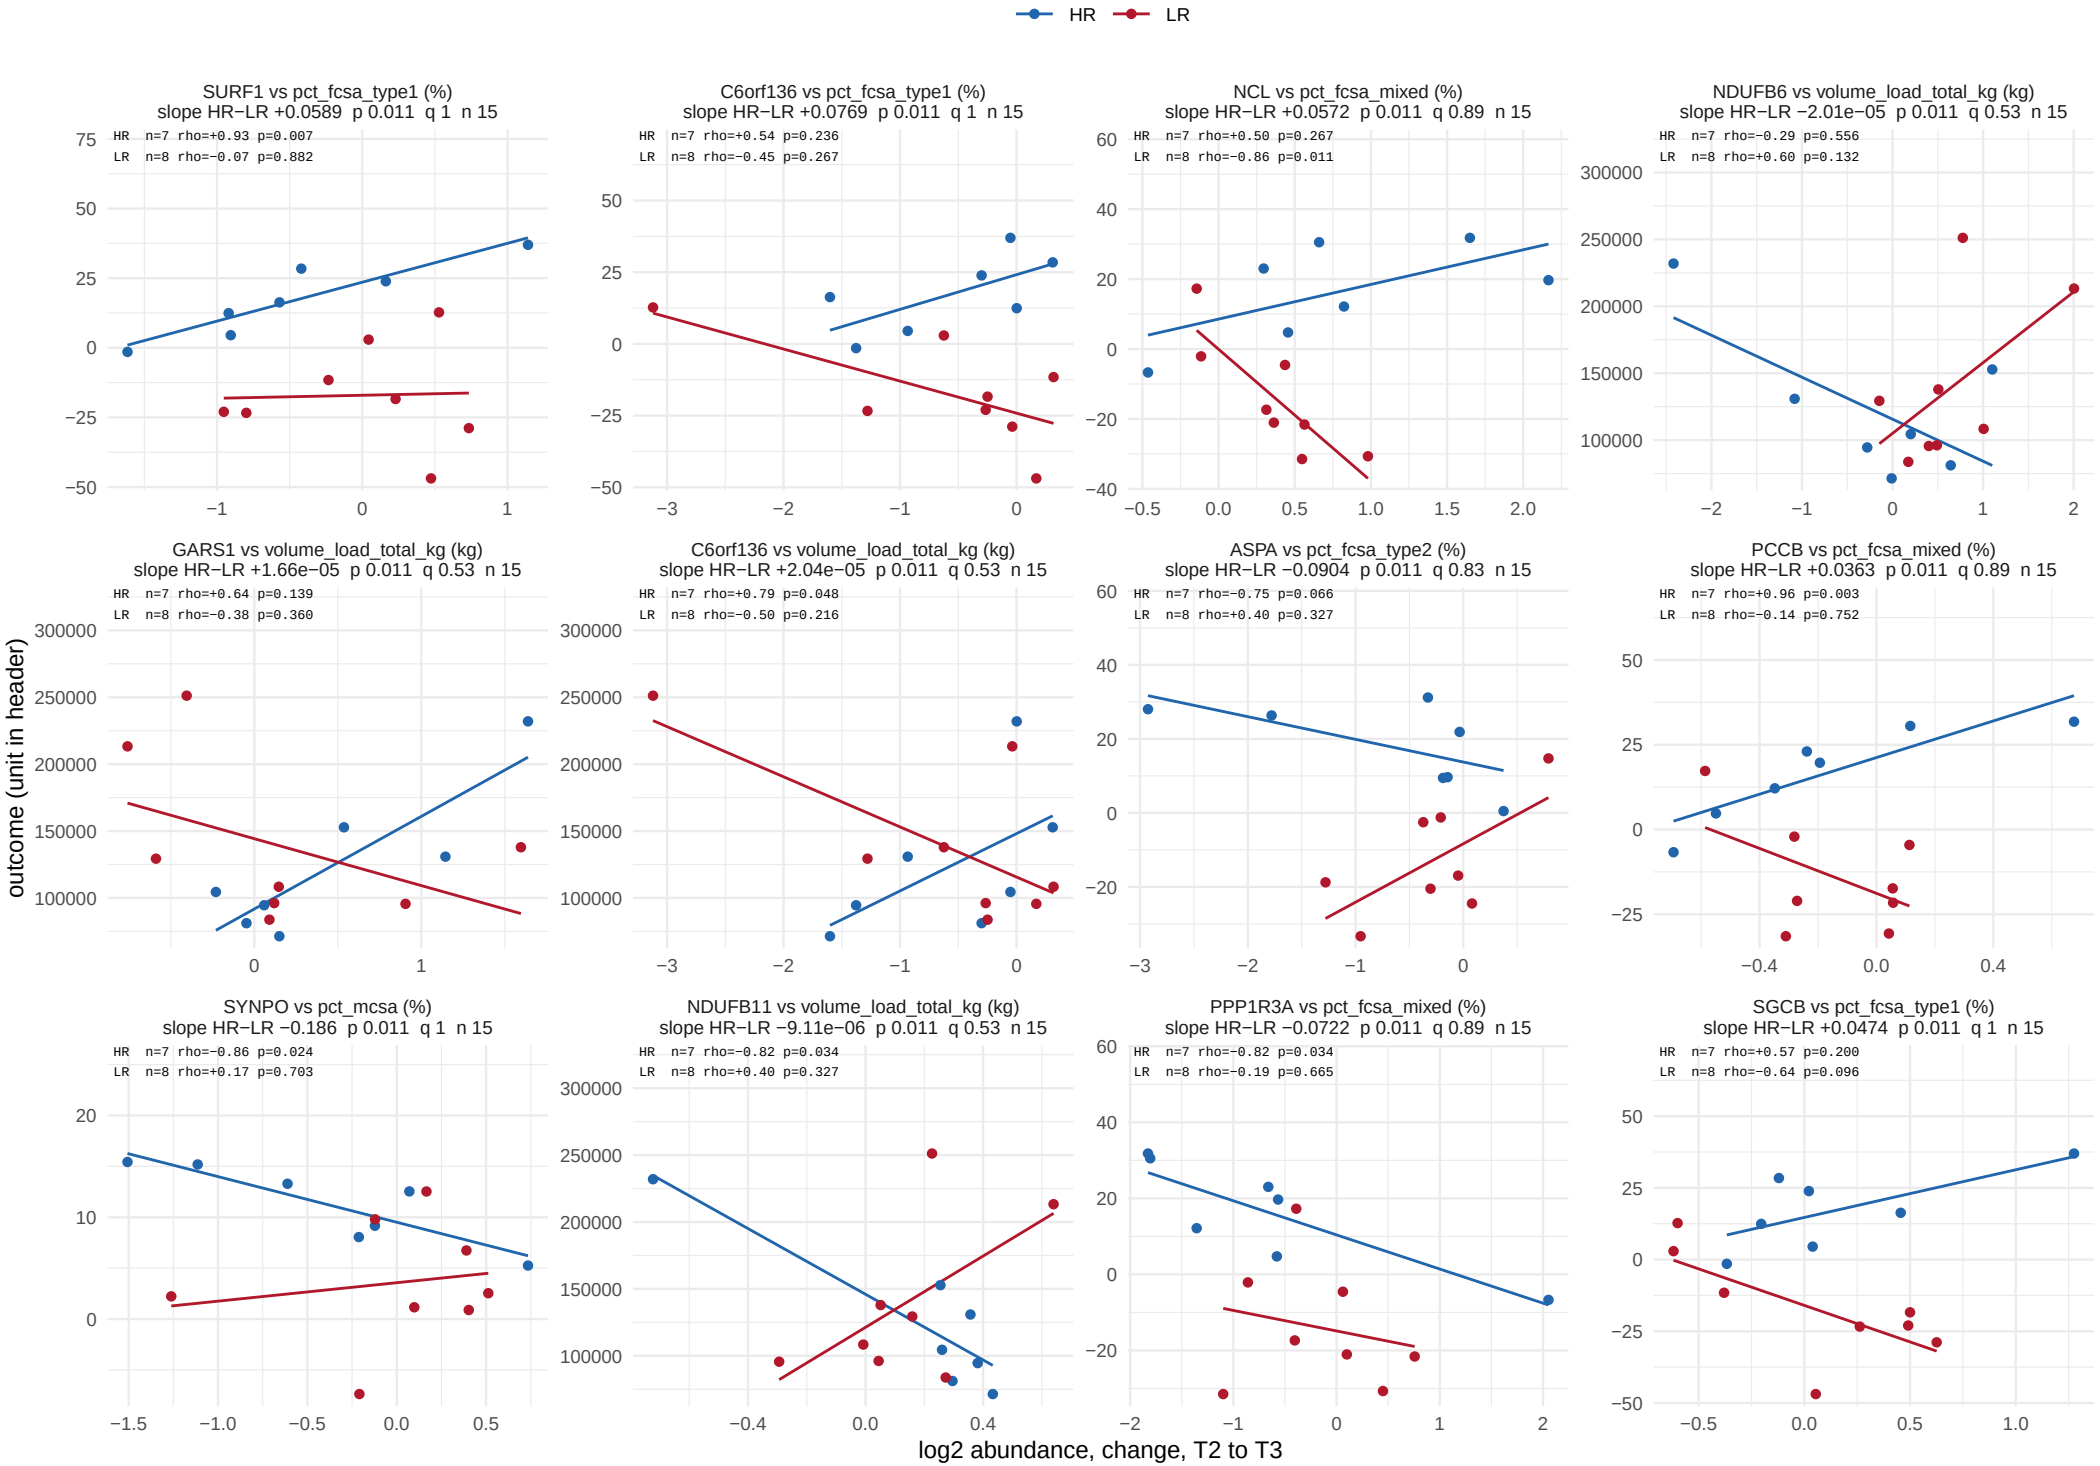

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


645 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 12 of 54.

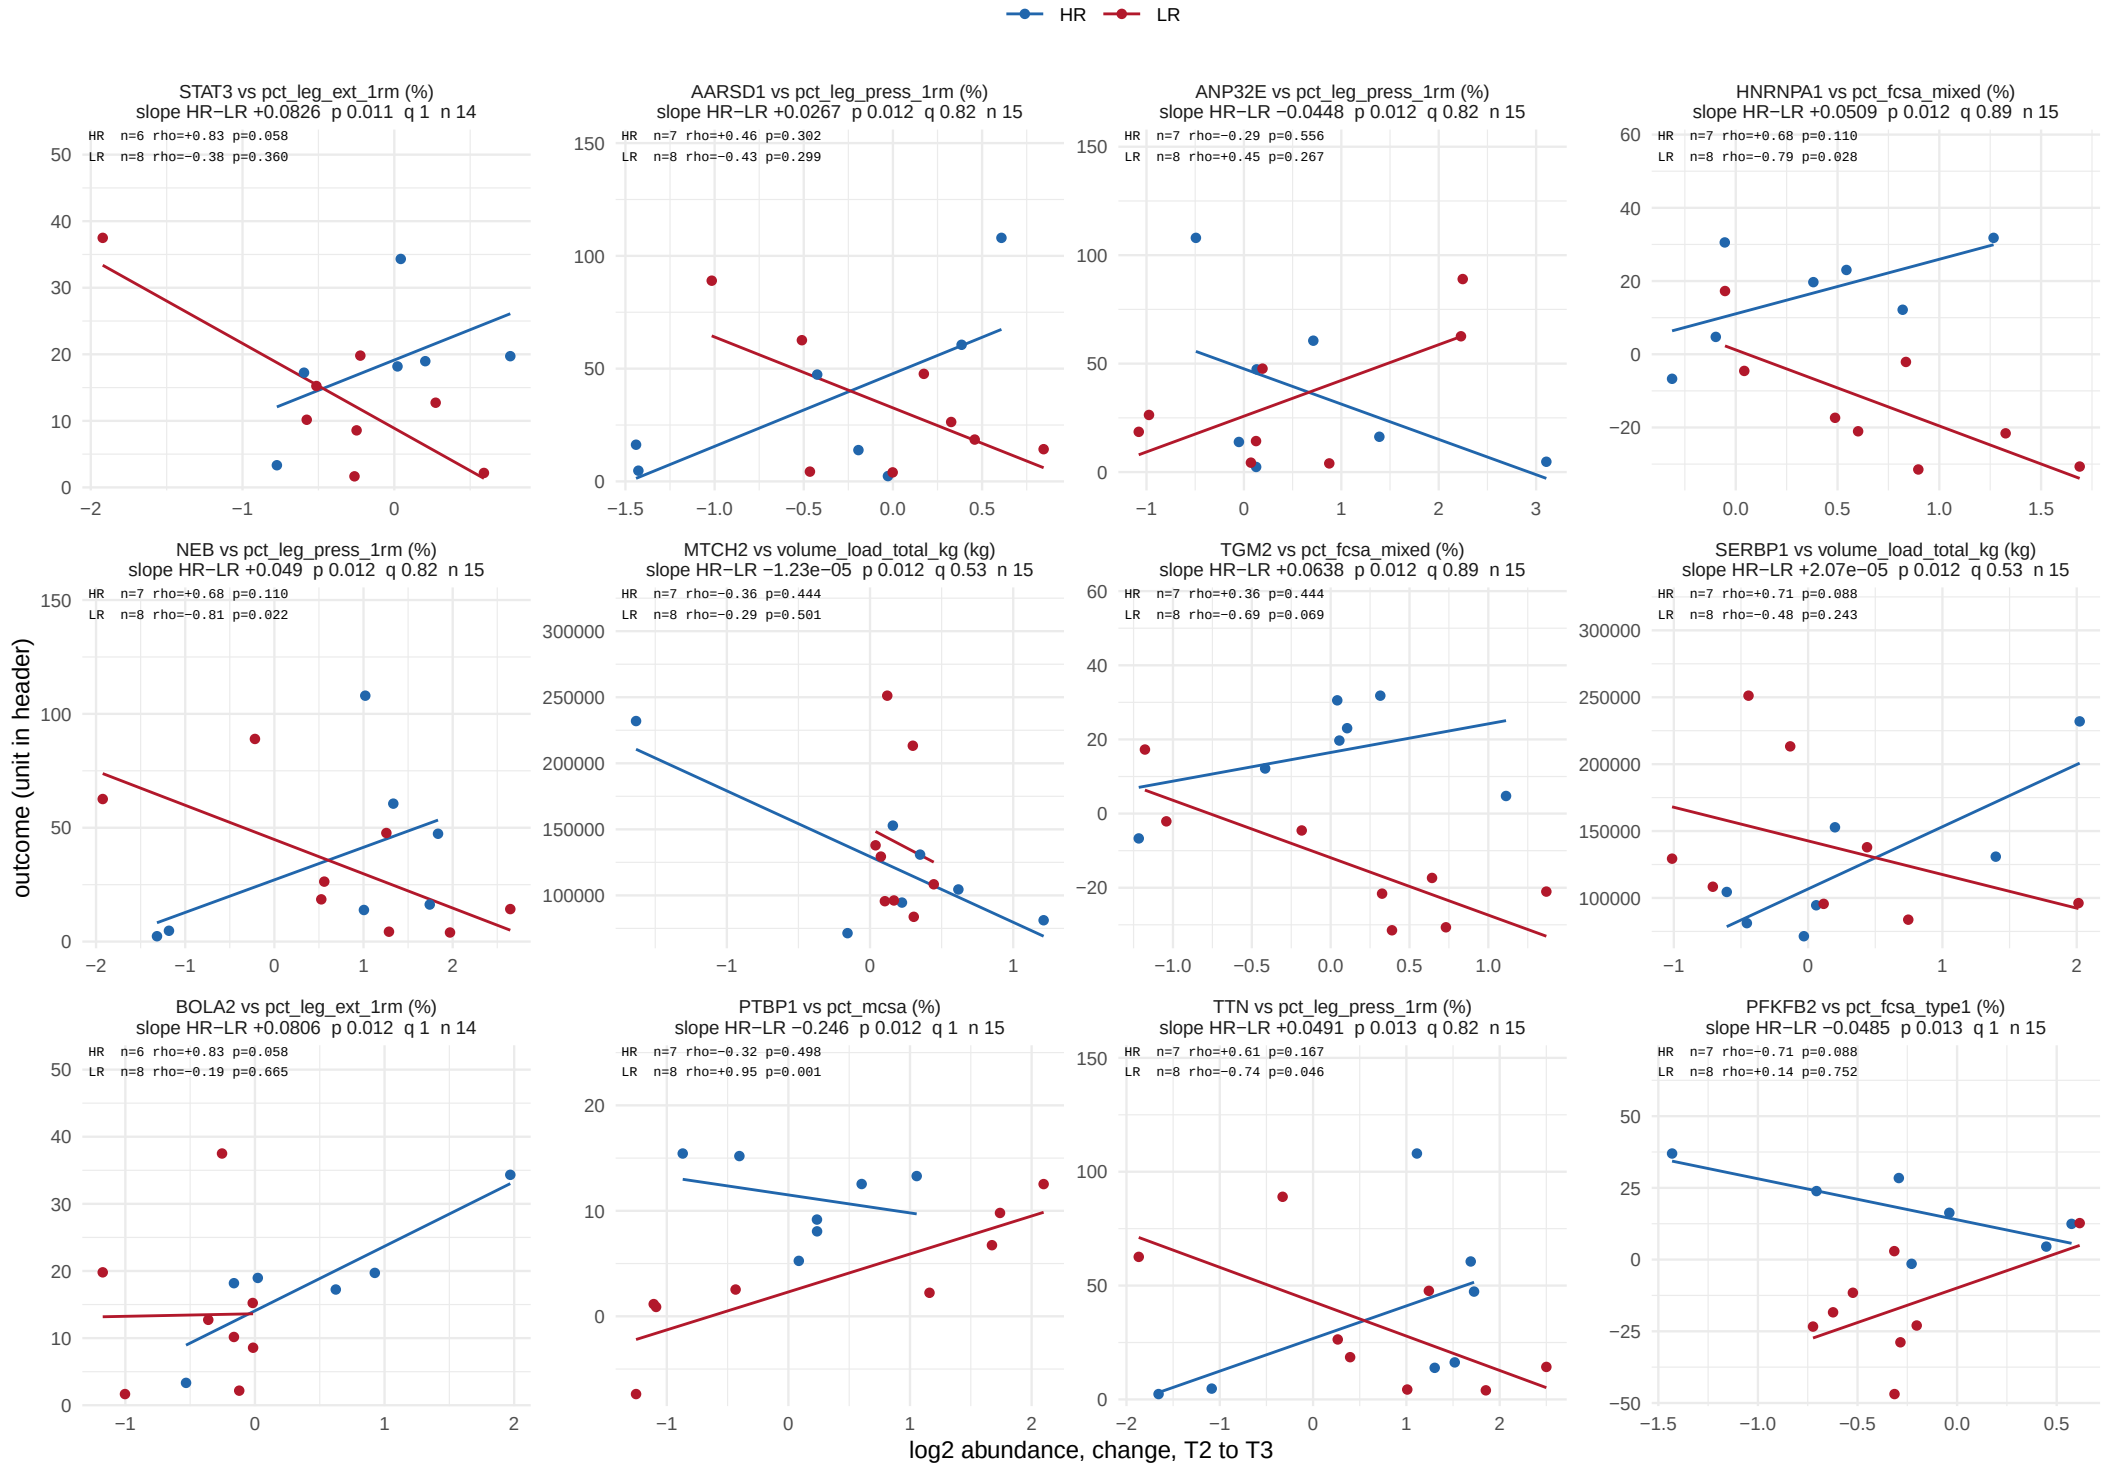

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window

645 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 13 of 54.

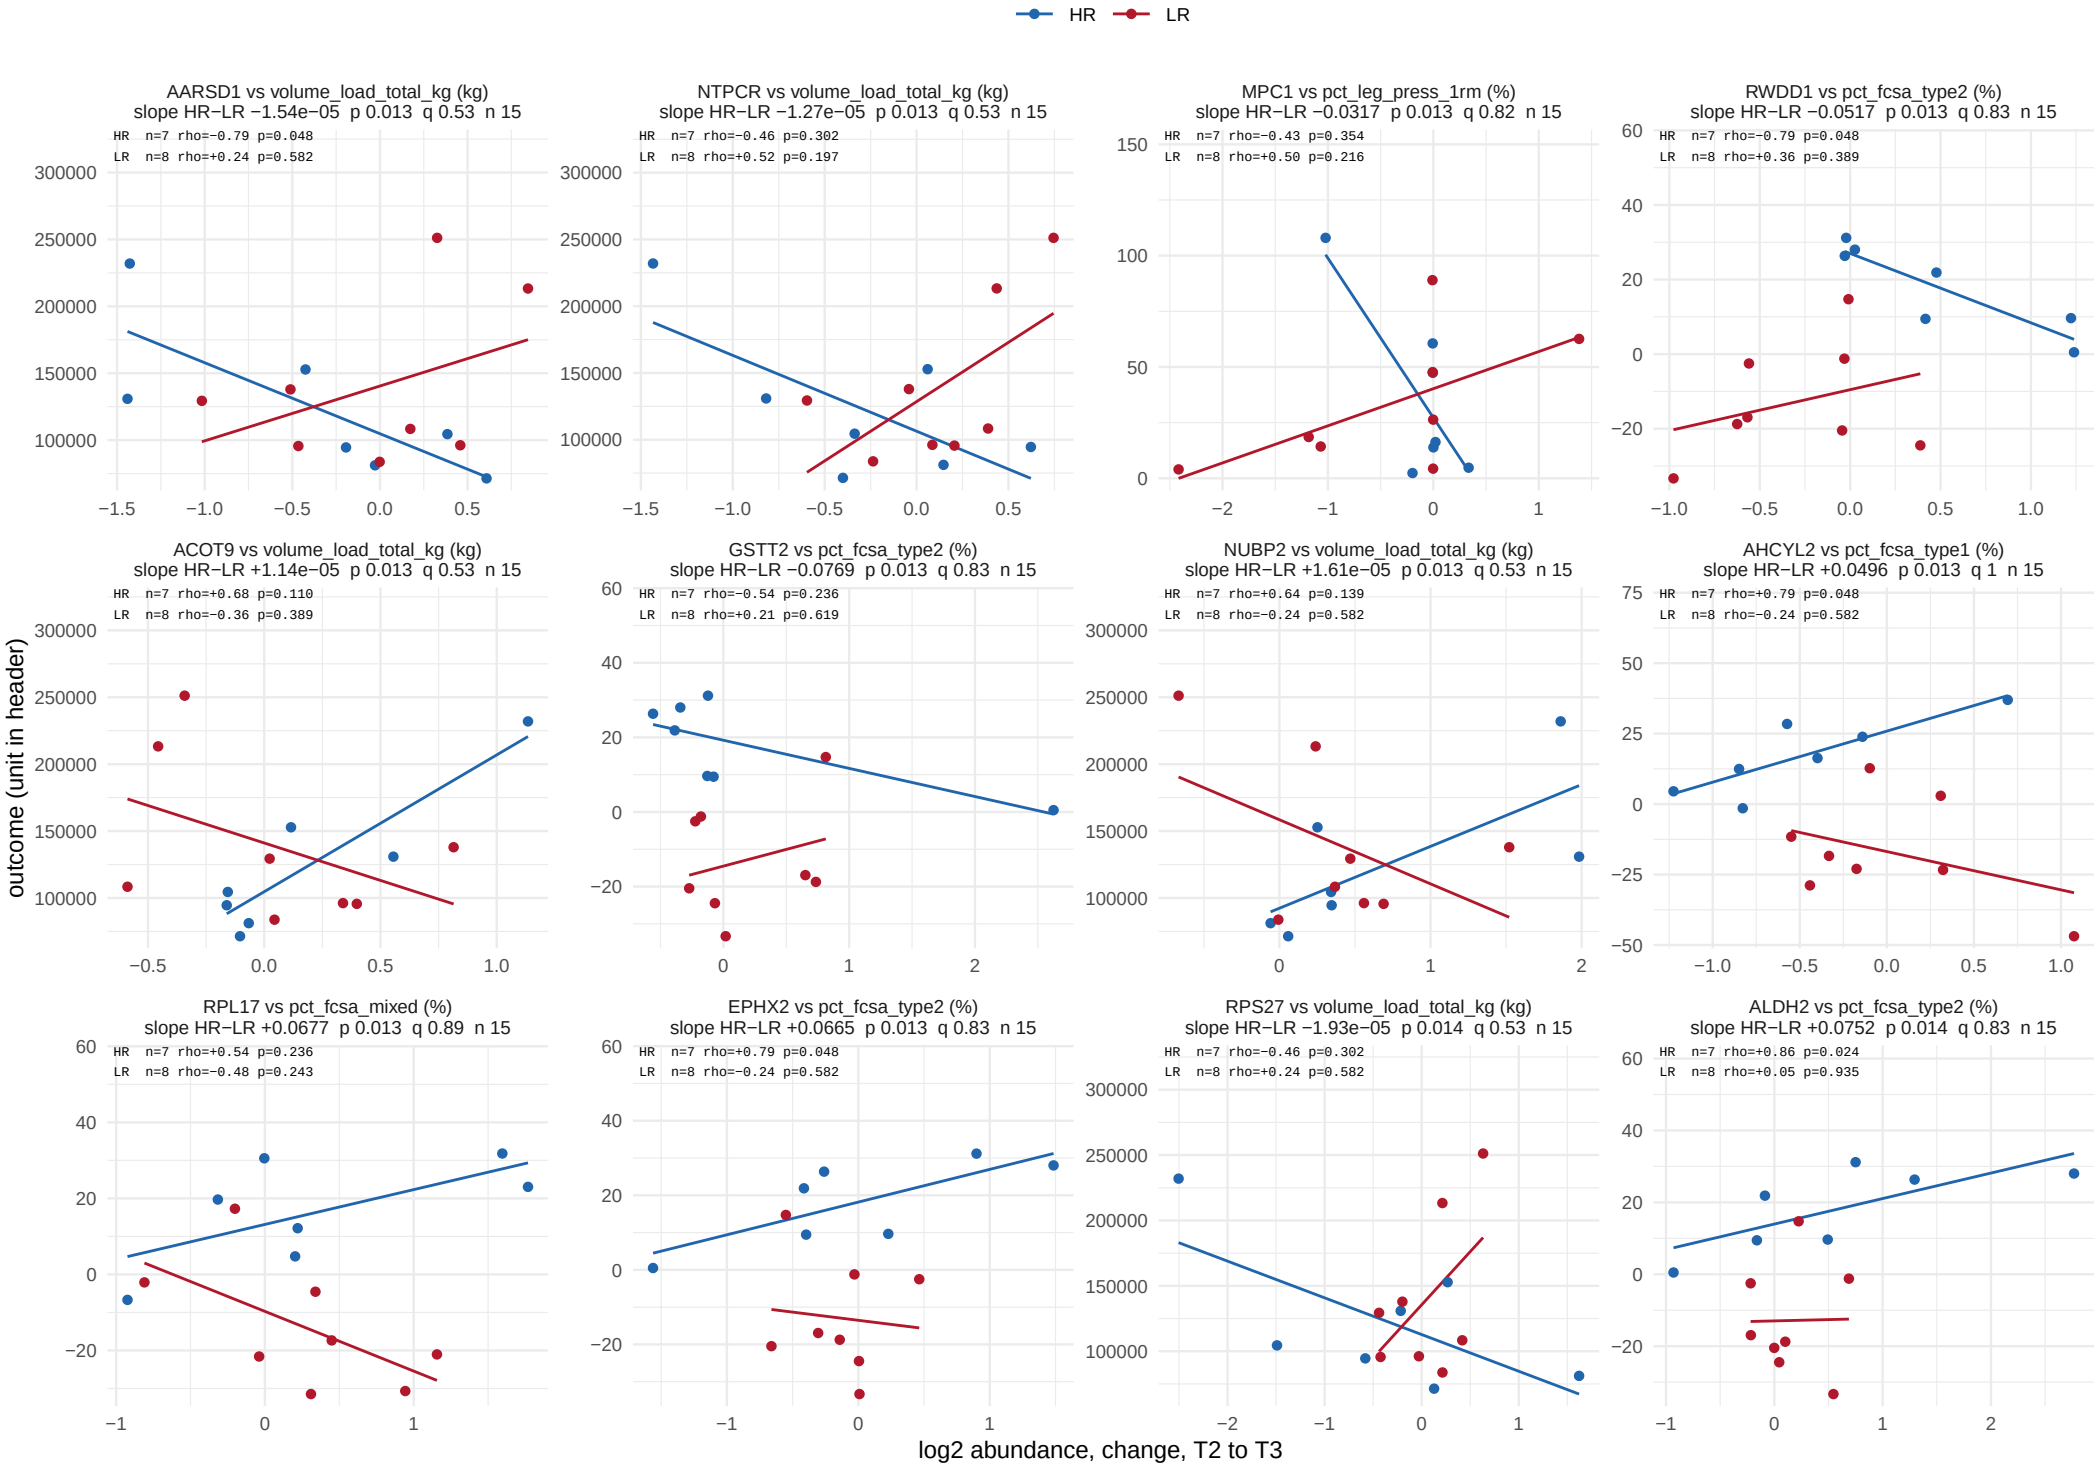

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window

645 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 14 of 54.



One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


645 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 15 of 54.



One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


645 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 16 of 54.

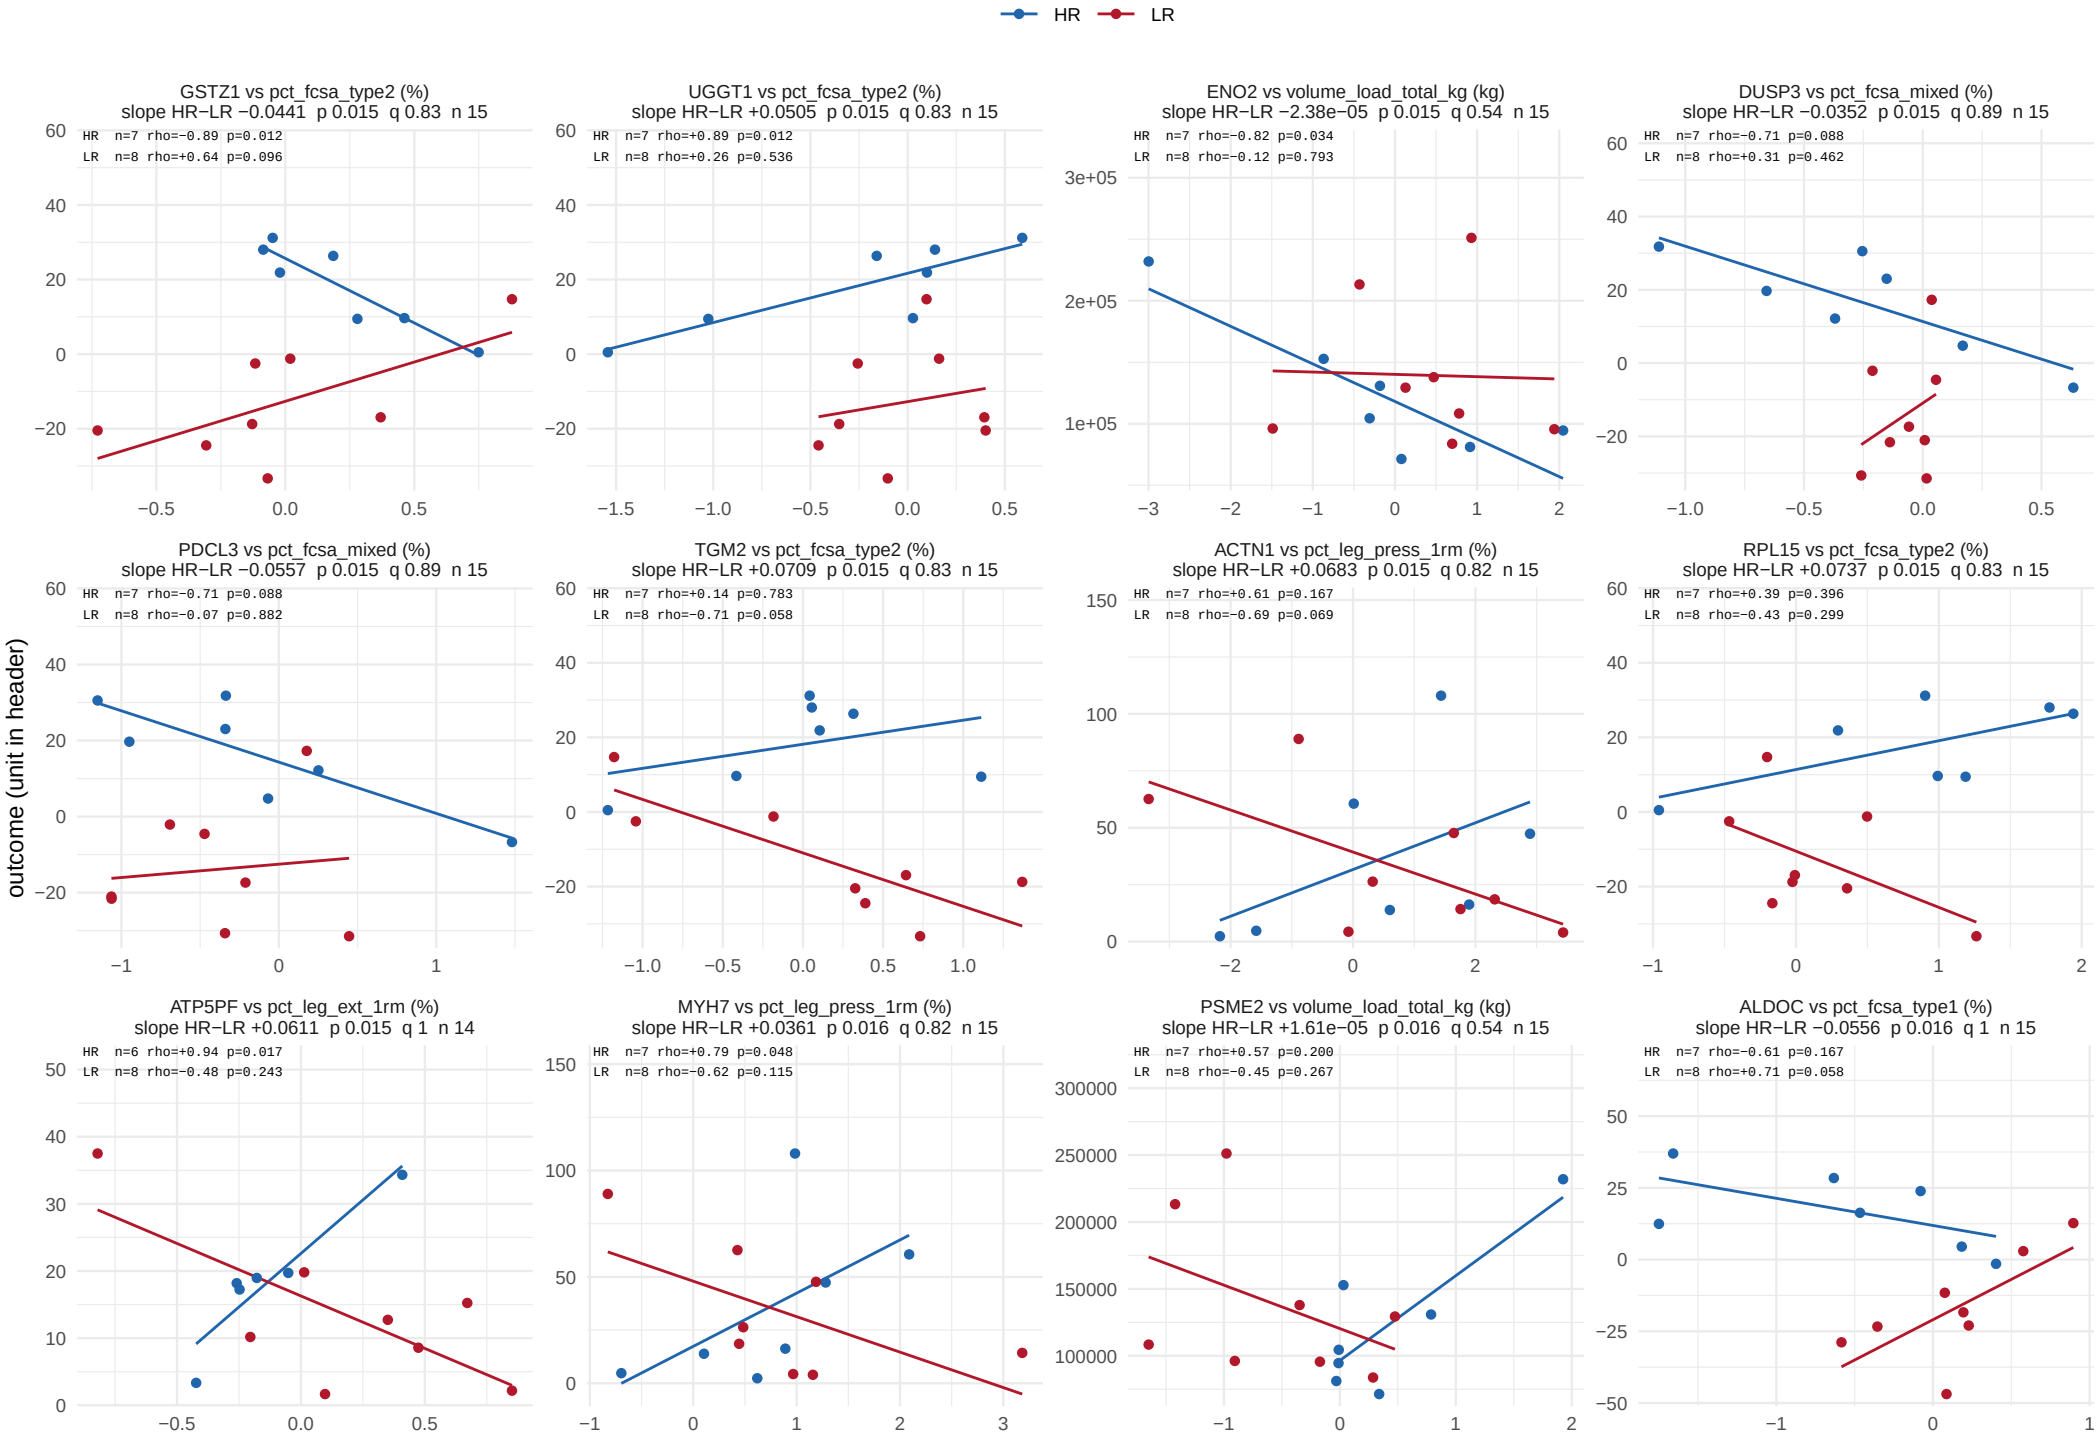

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


645 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 17 of 54.

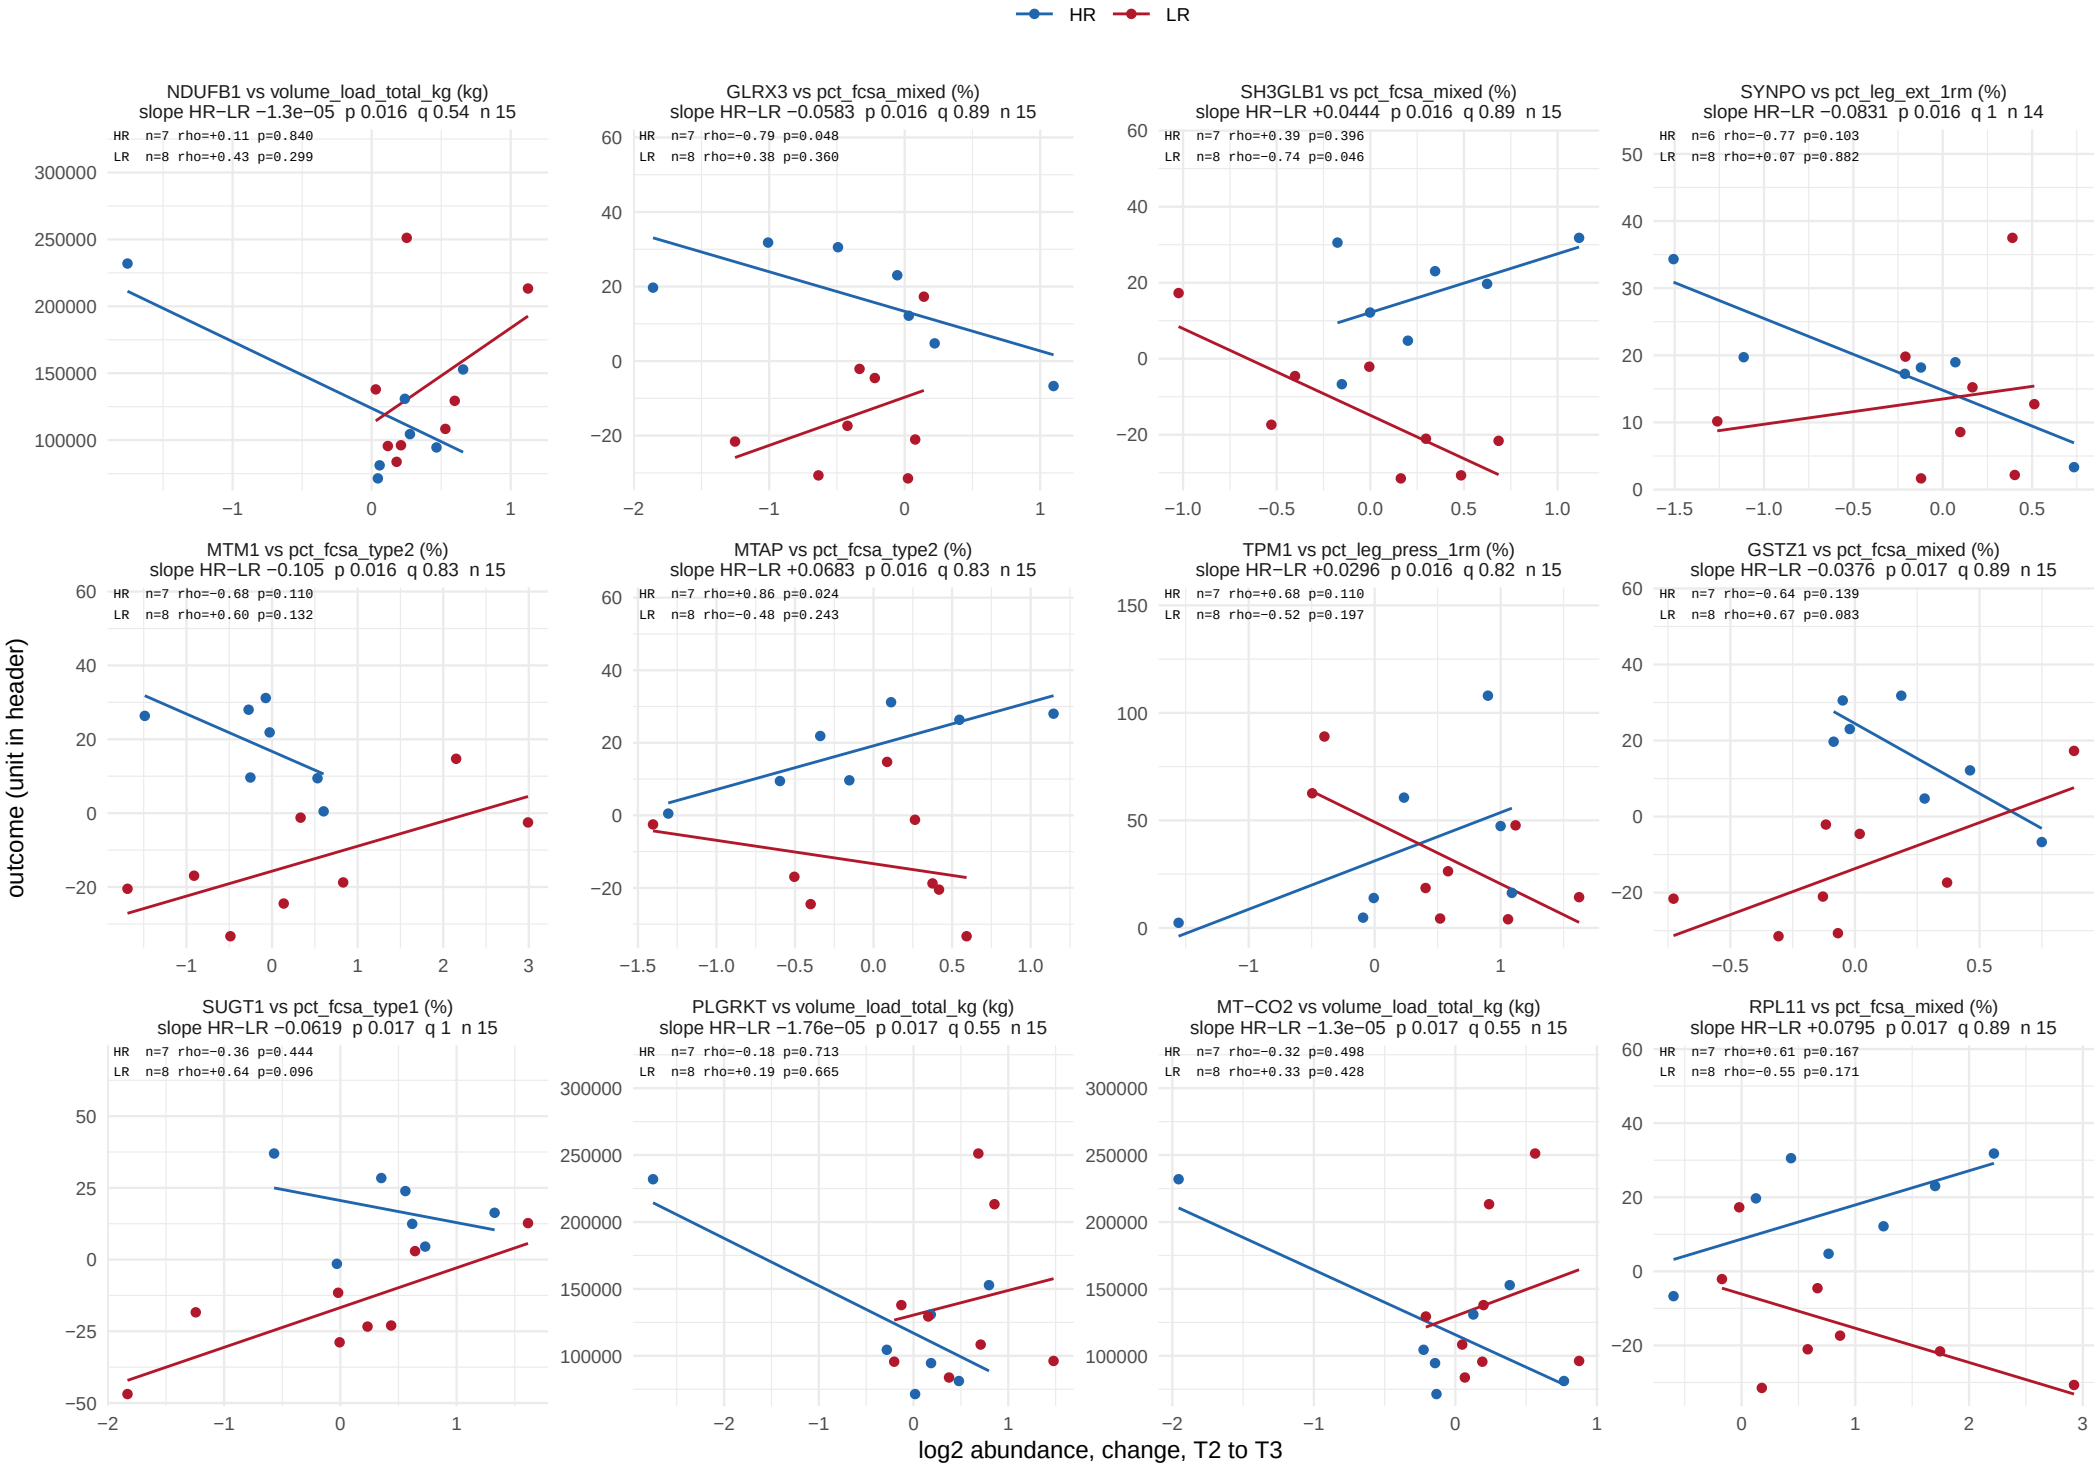

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


645 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 18 of 54.

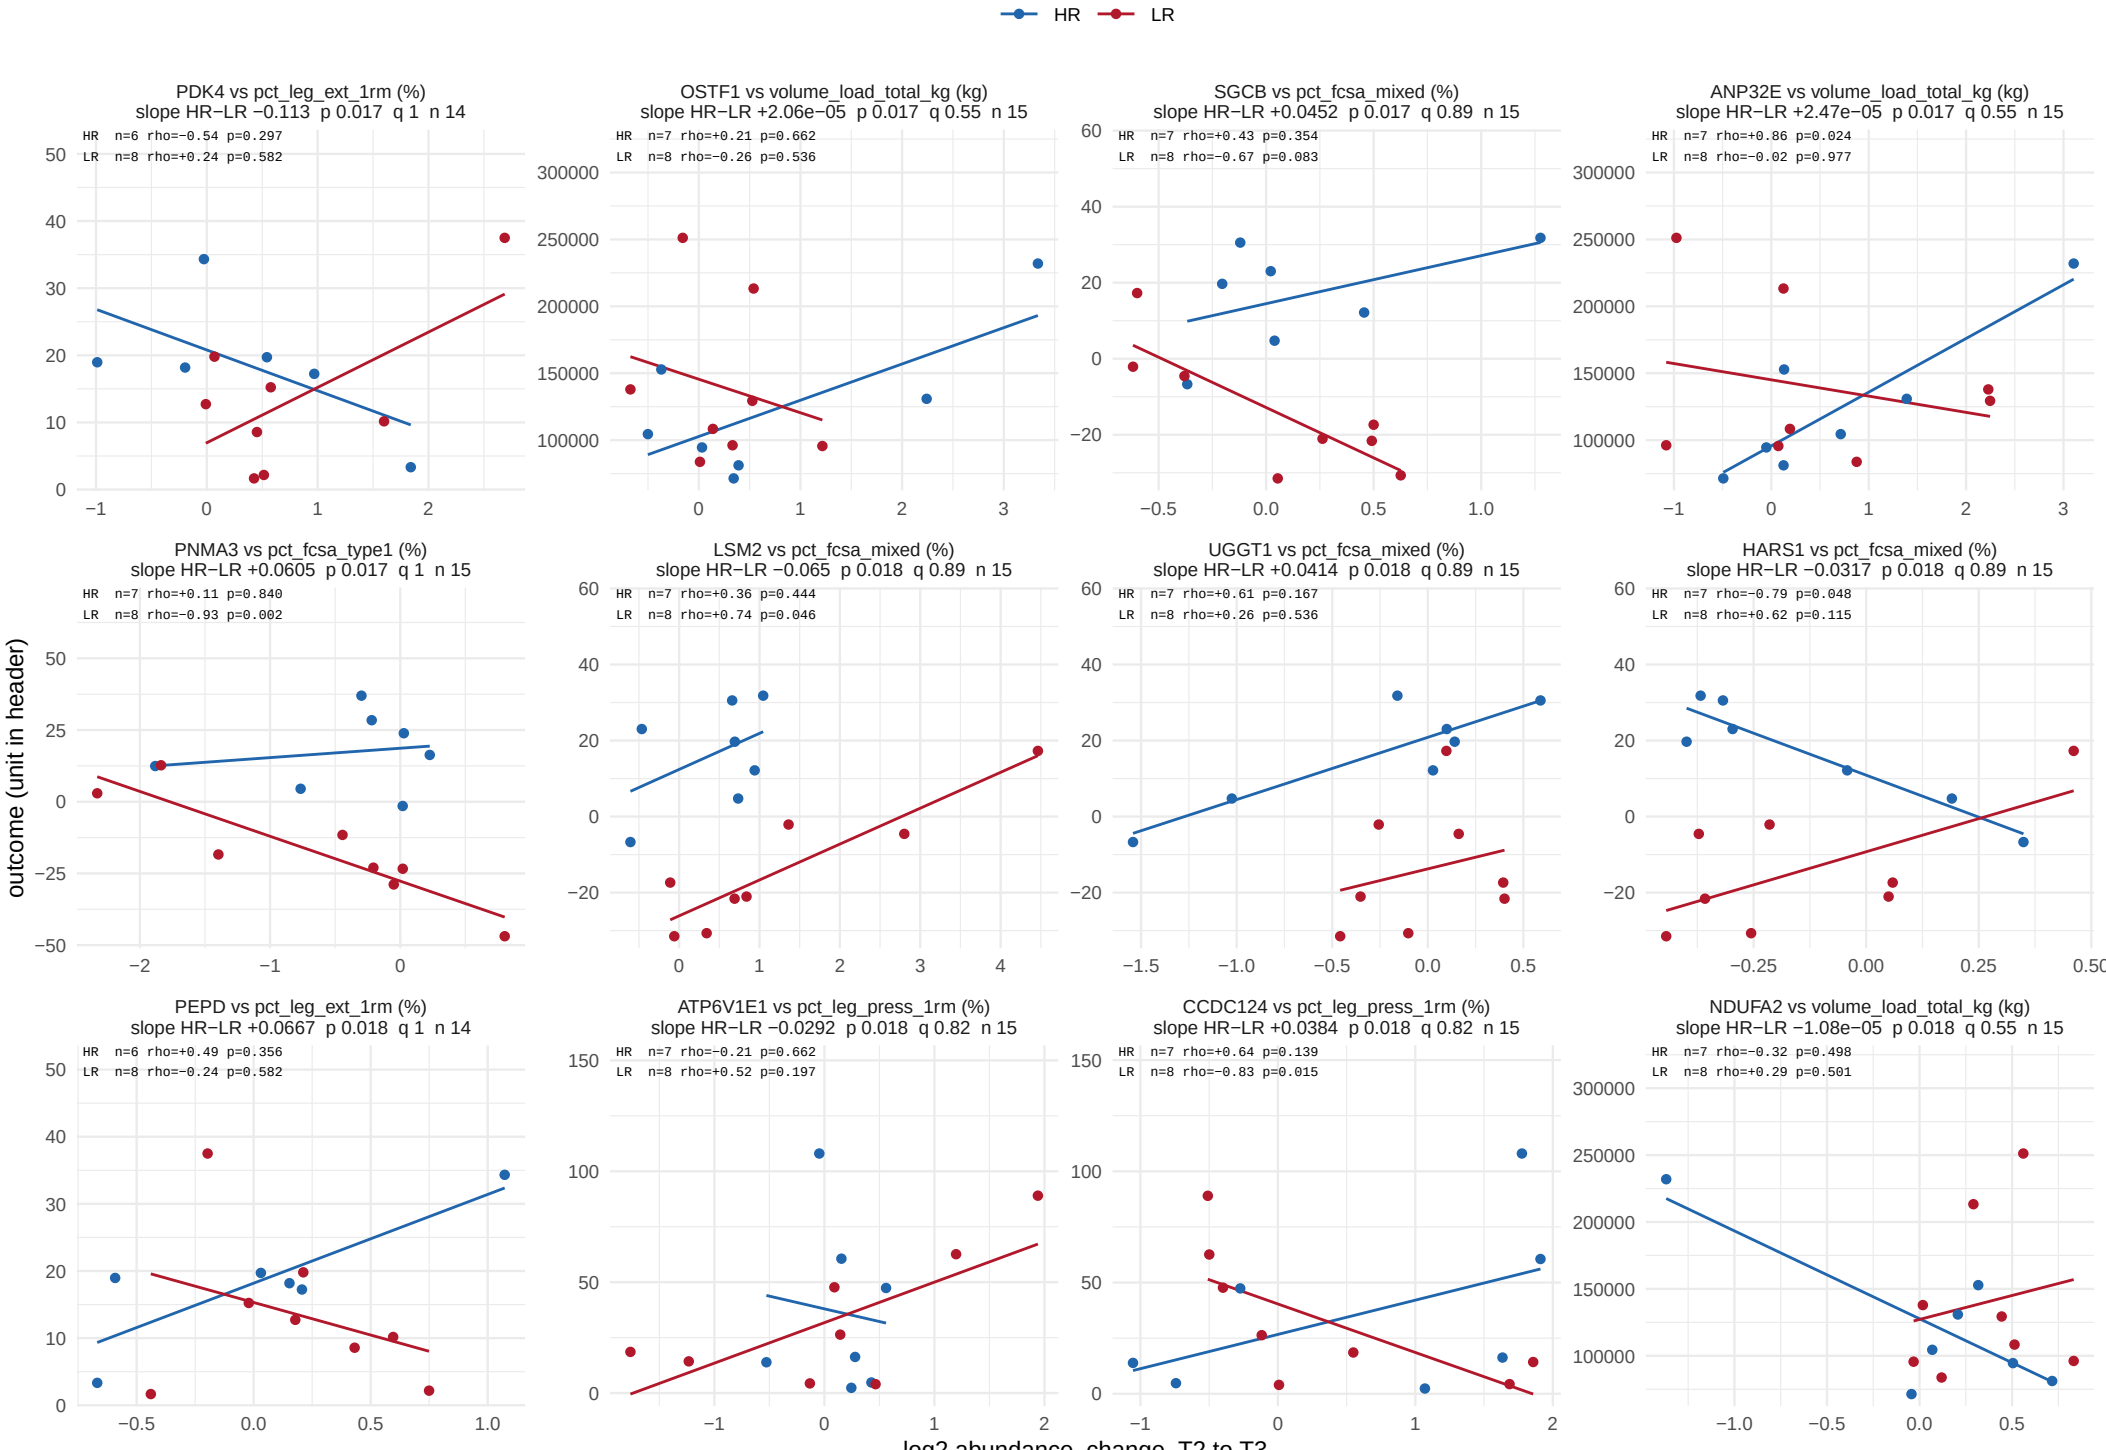

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


645 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 19 of 54.

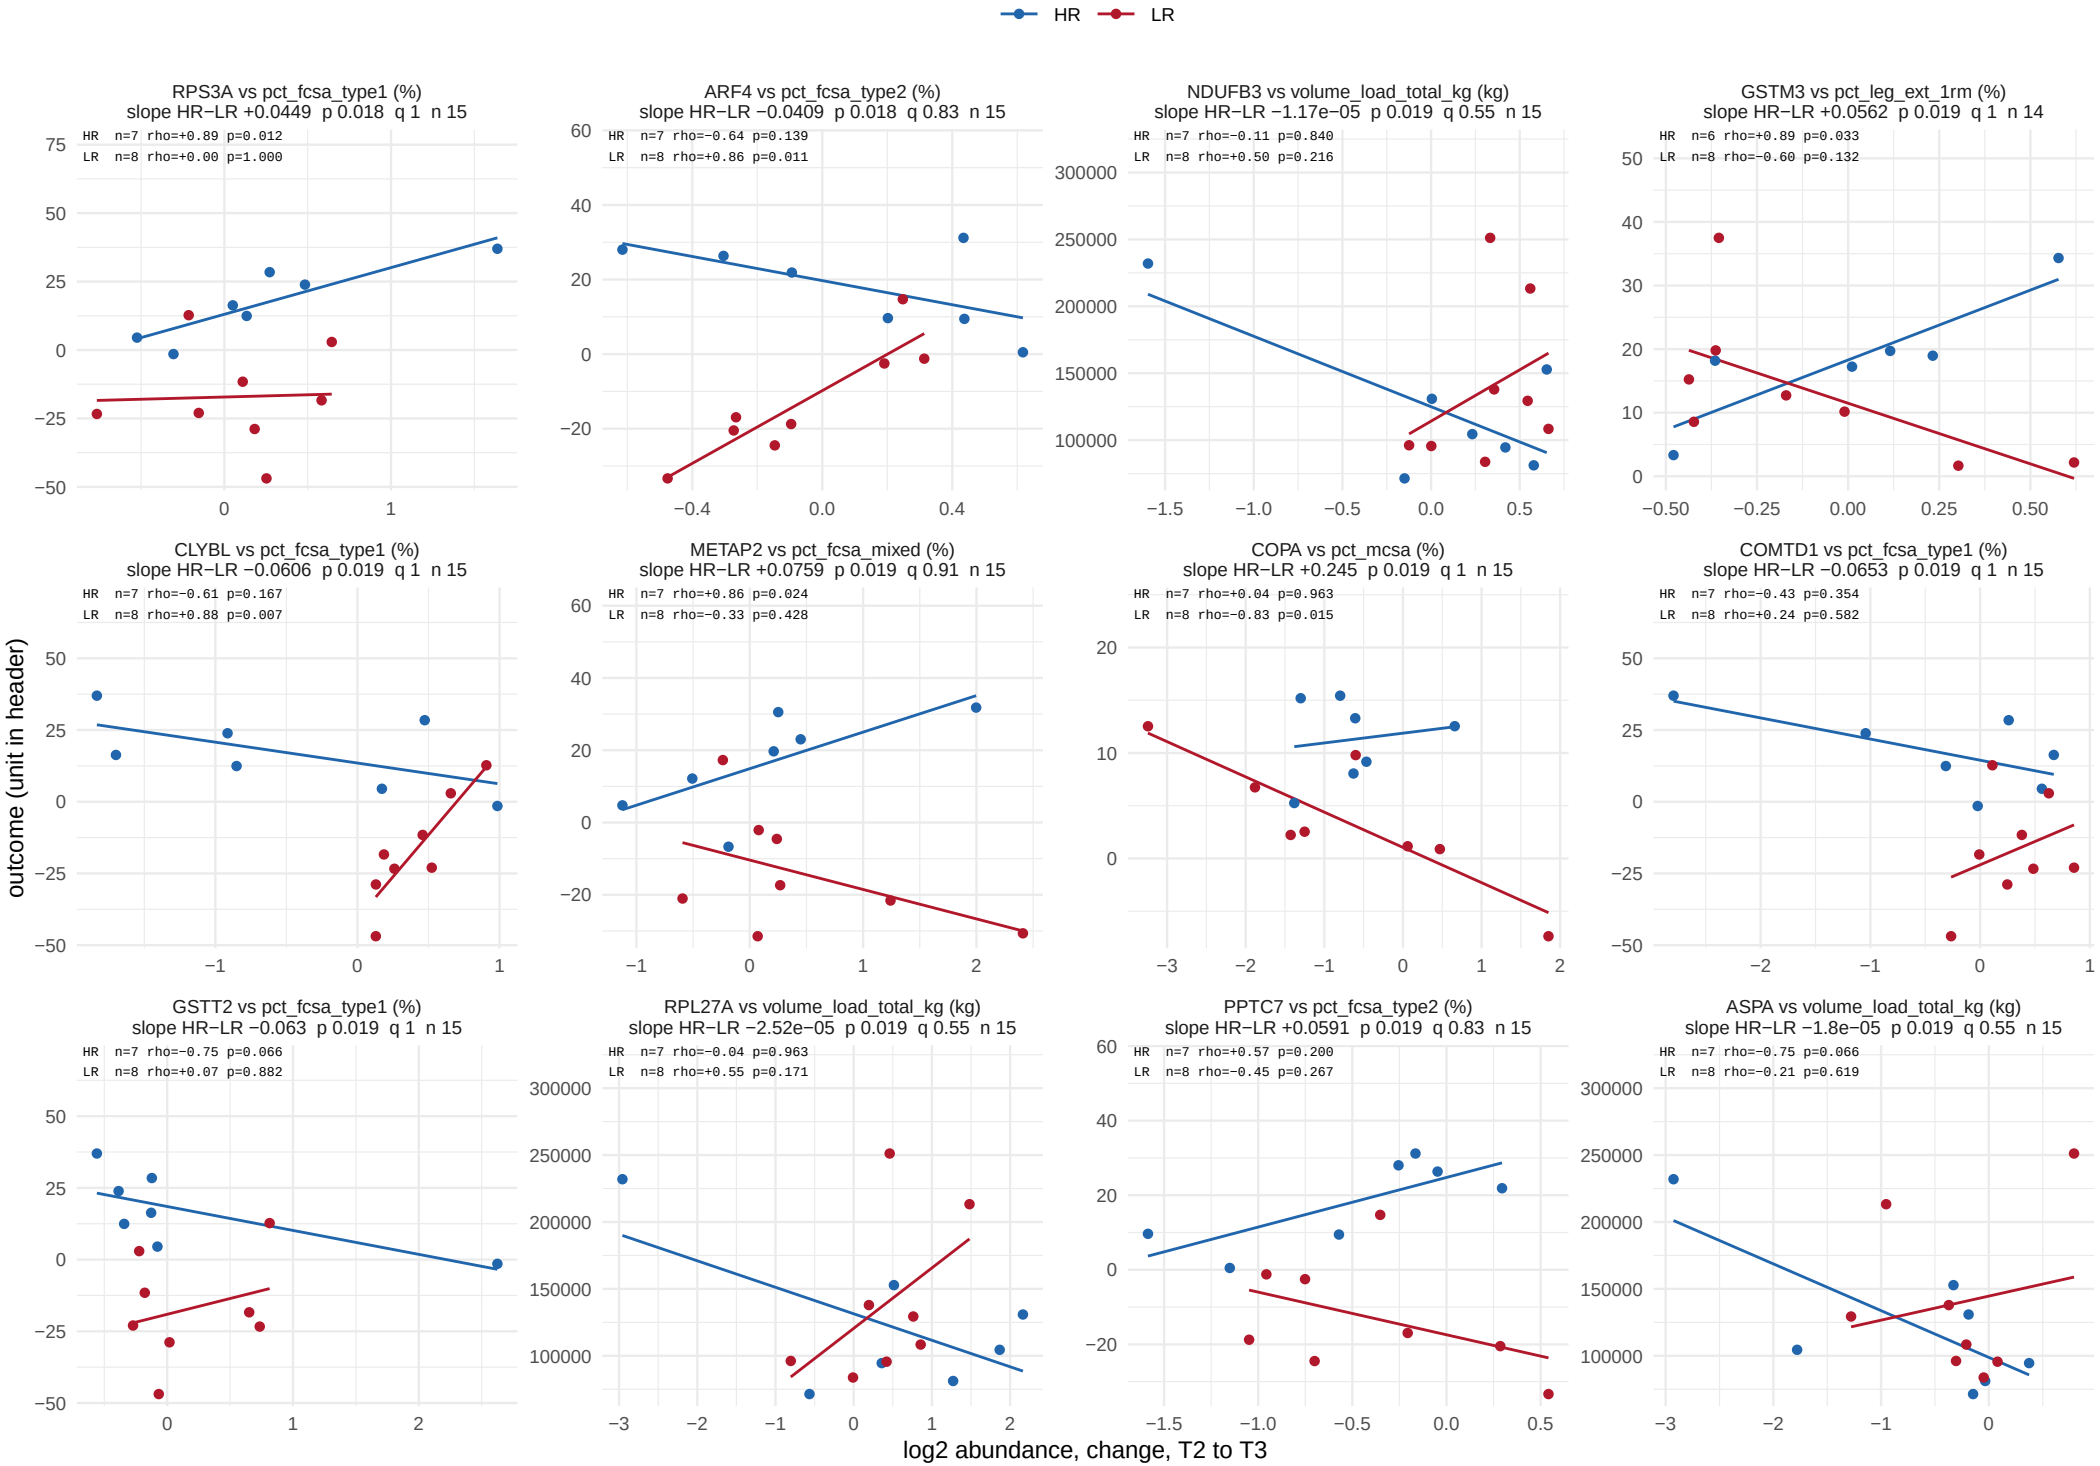

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


645 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 20 of 54.

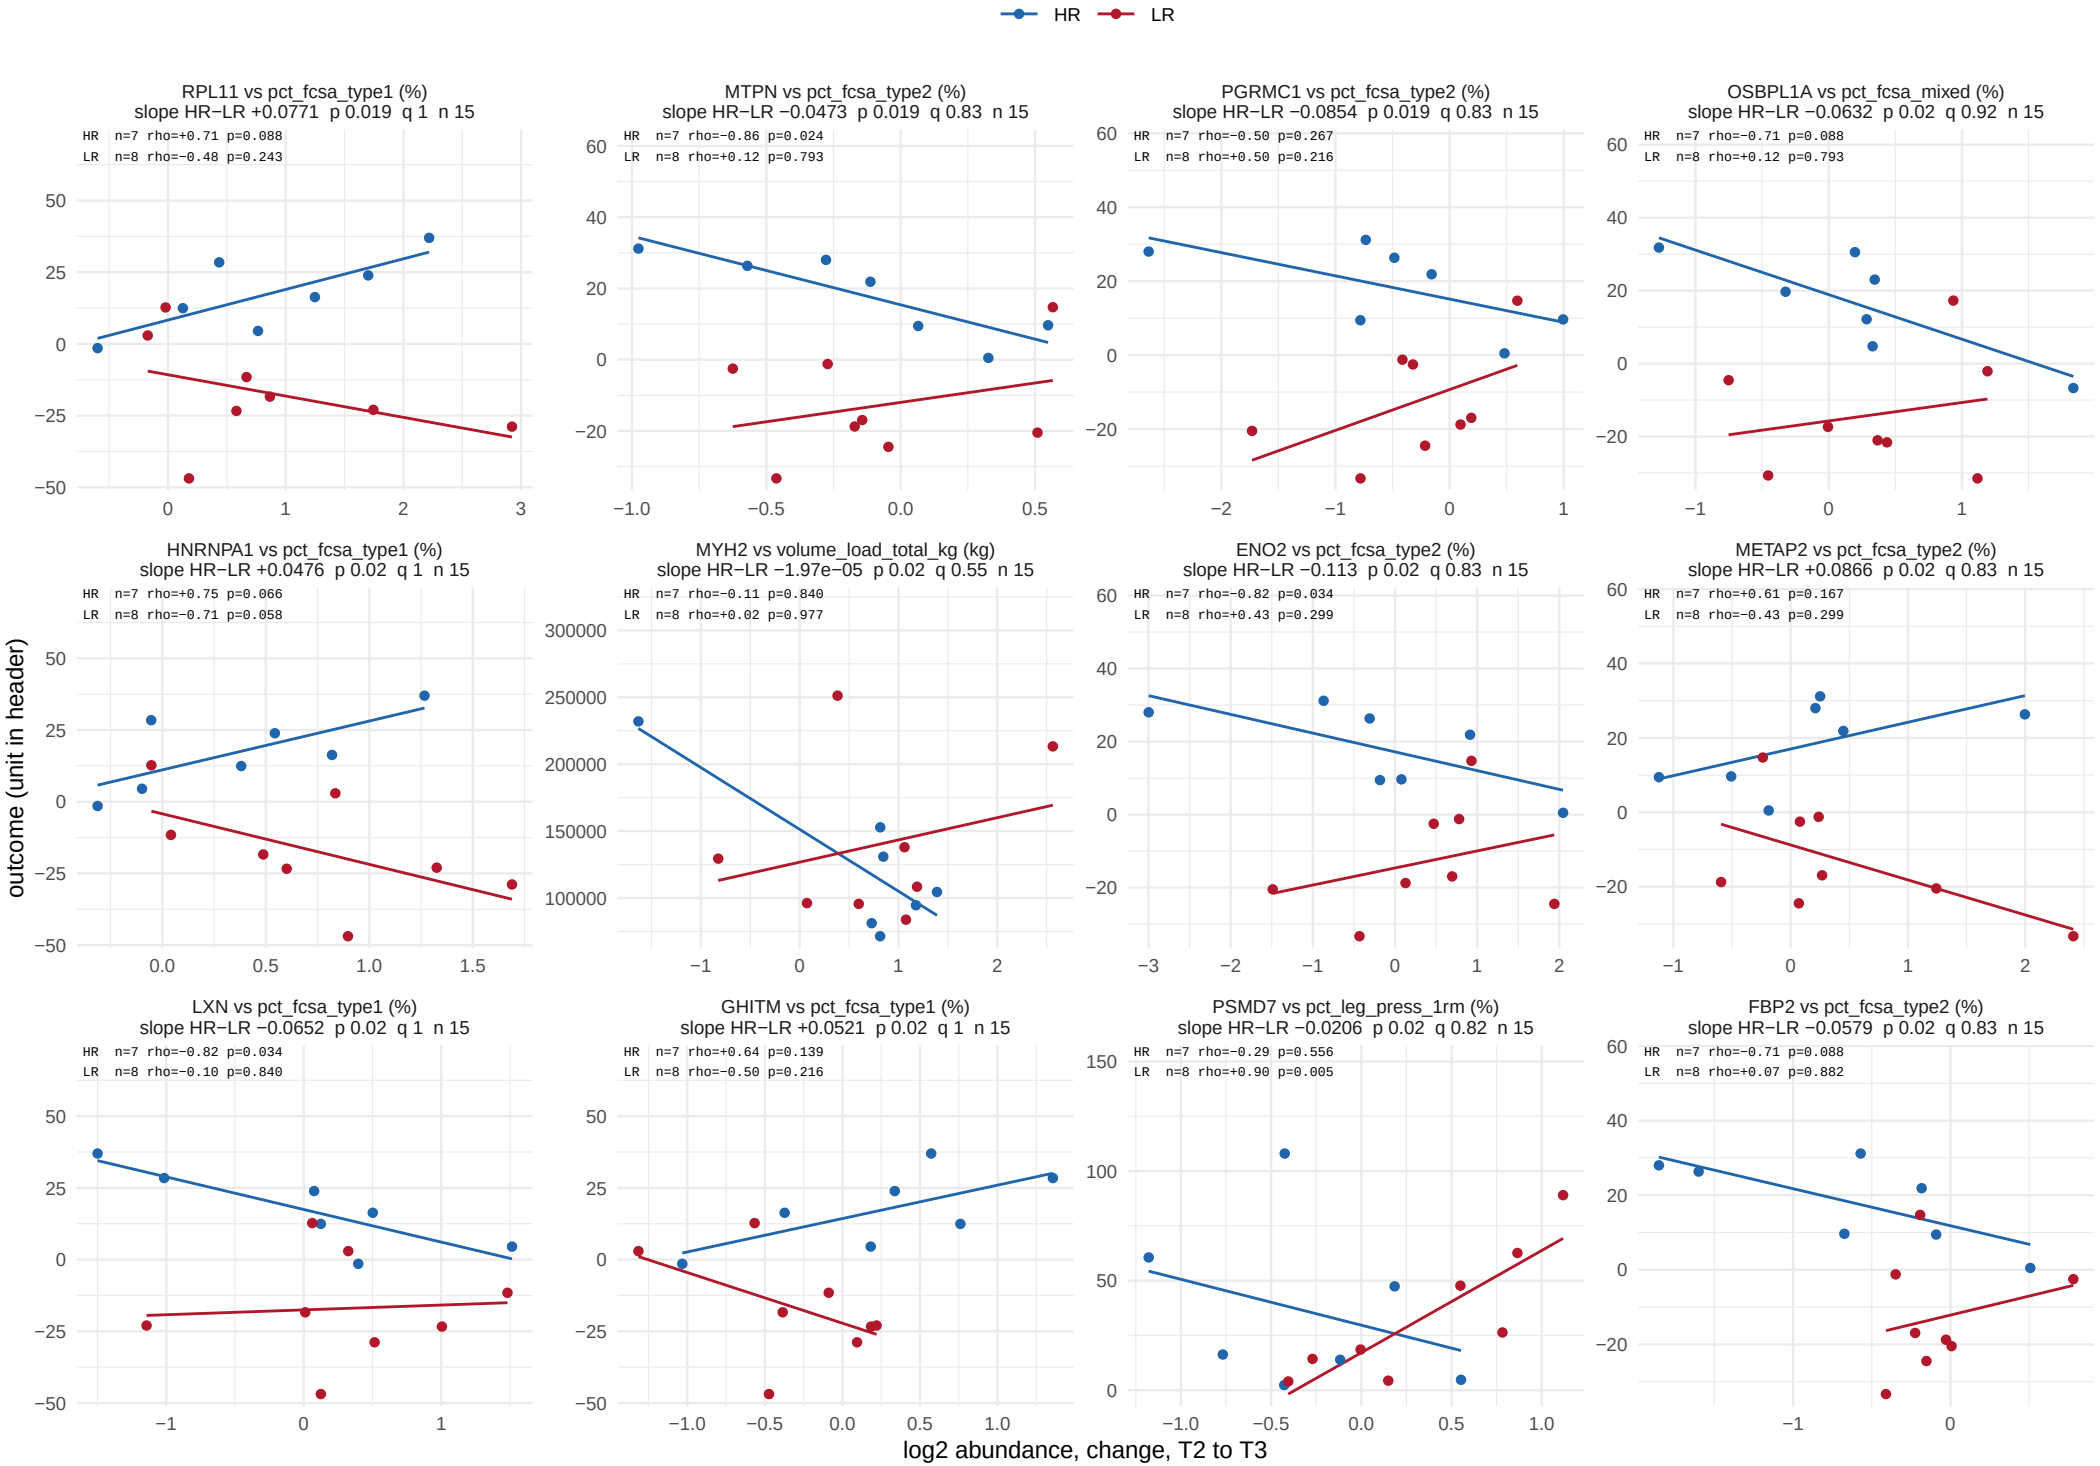

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


645 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 21 of 54.

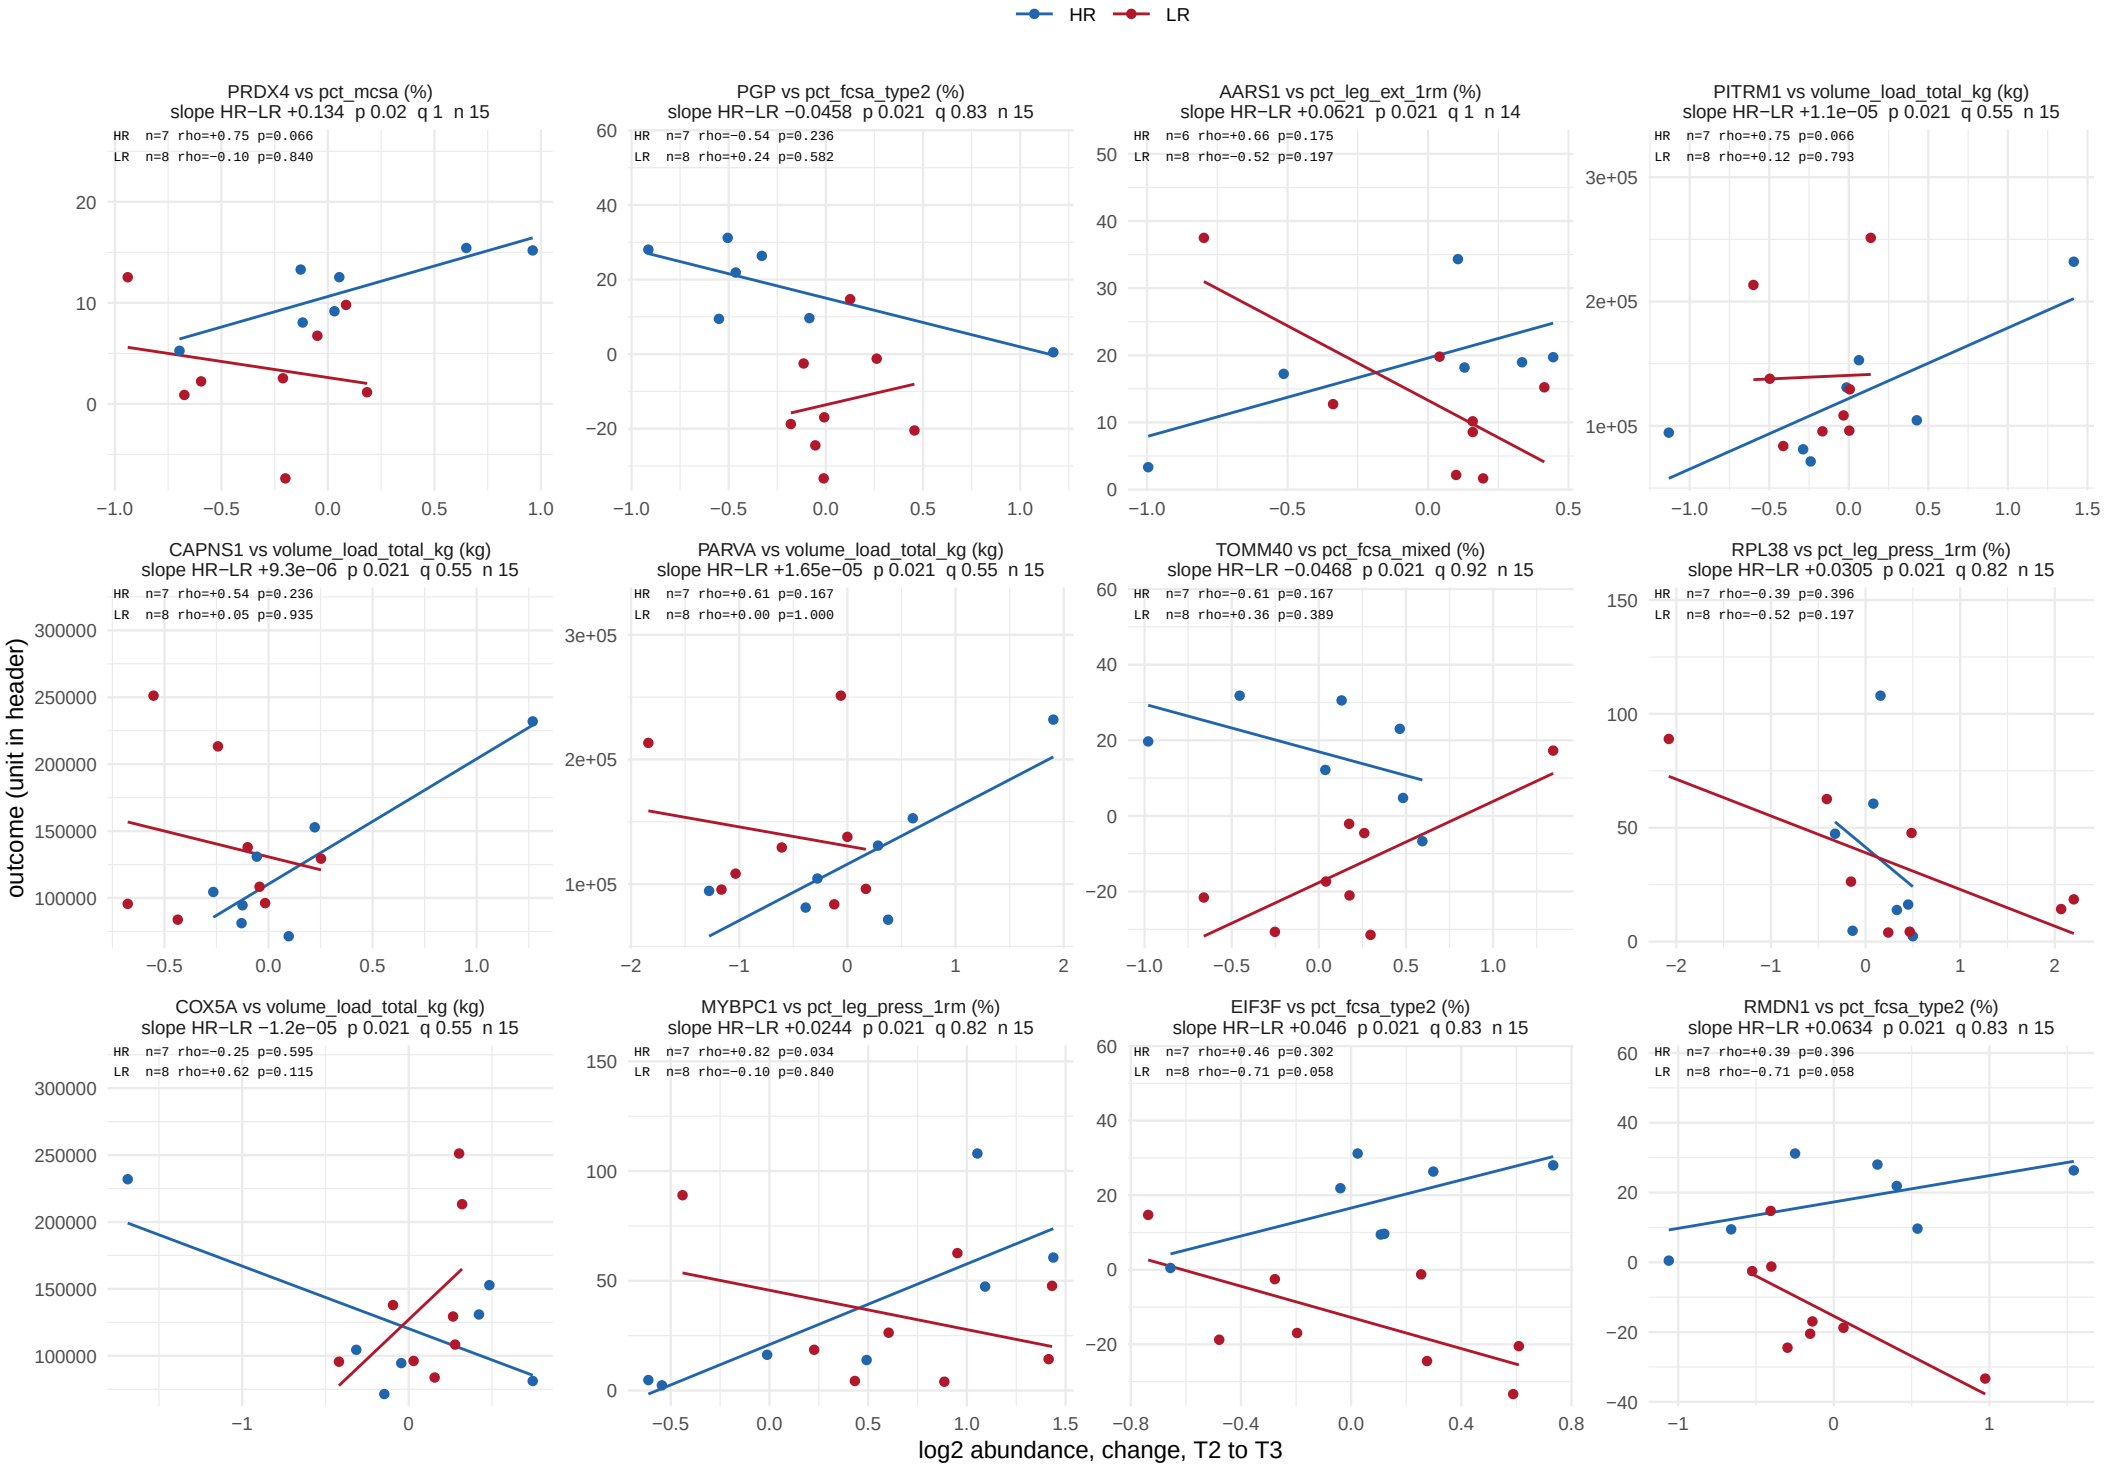

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


645 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 22 of 54.

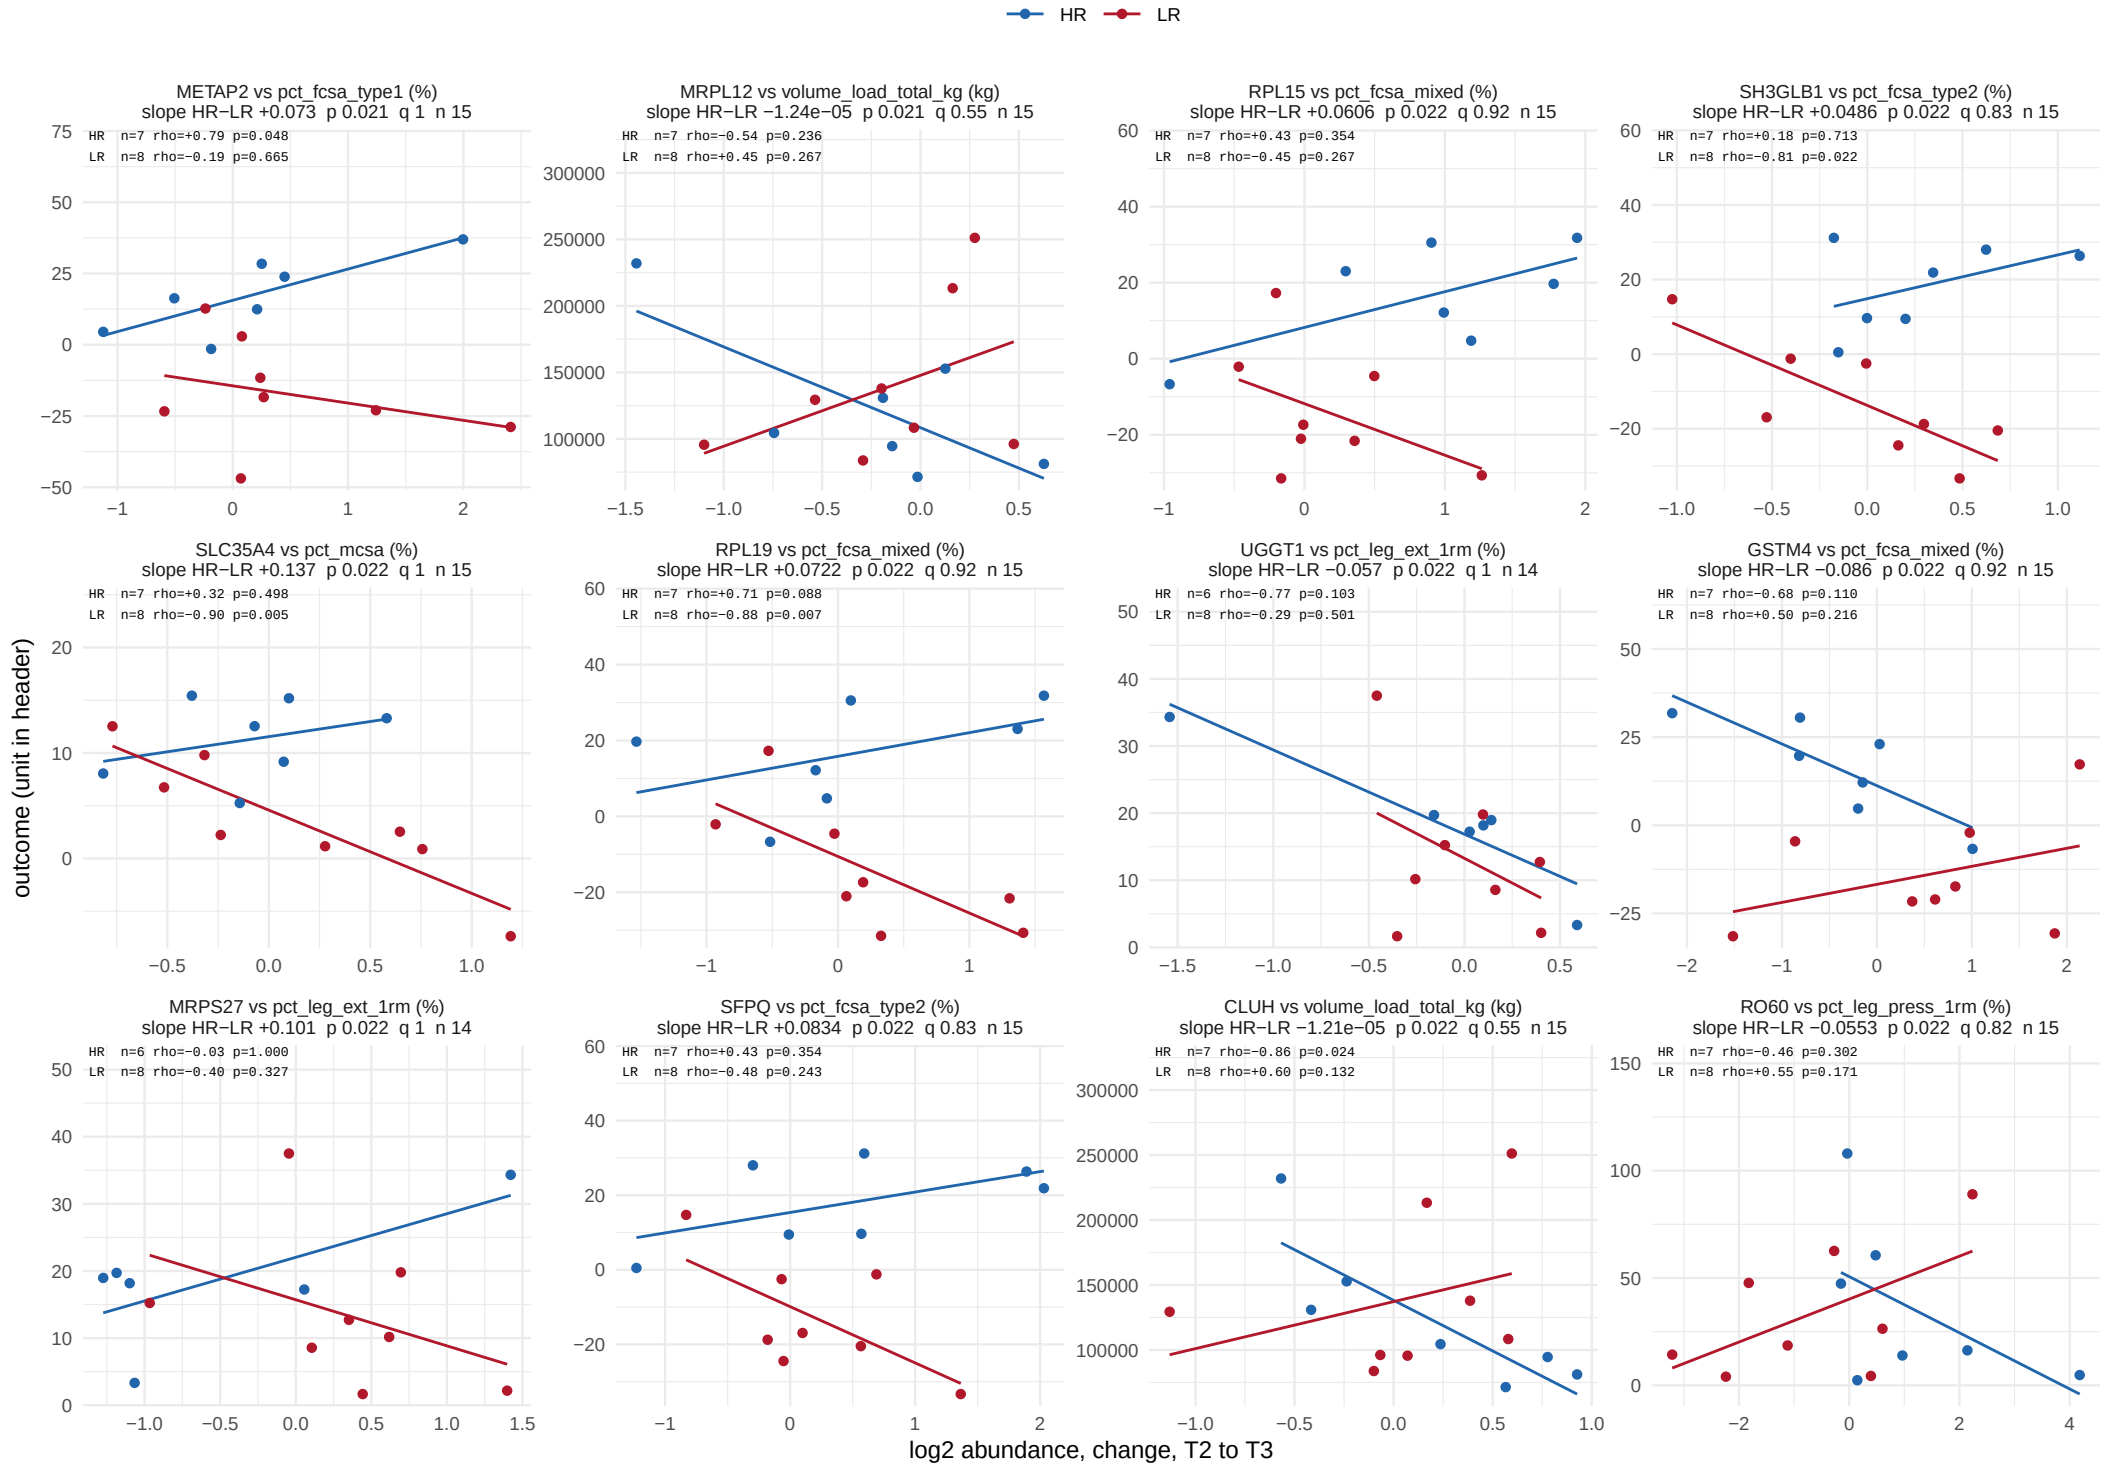

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


645 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 23 of 54.

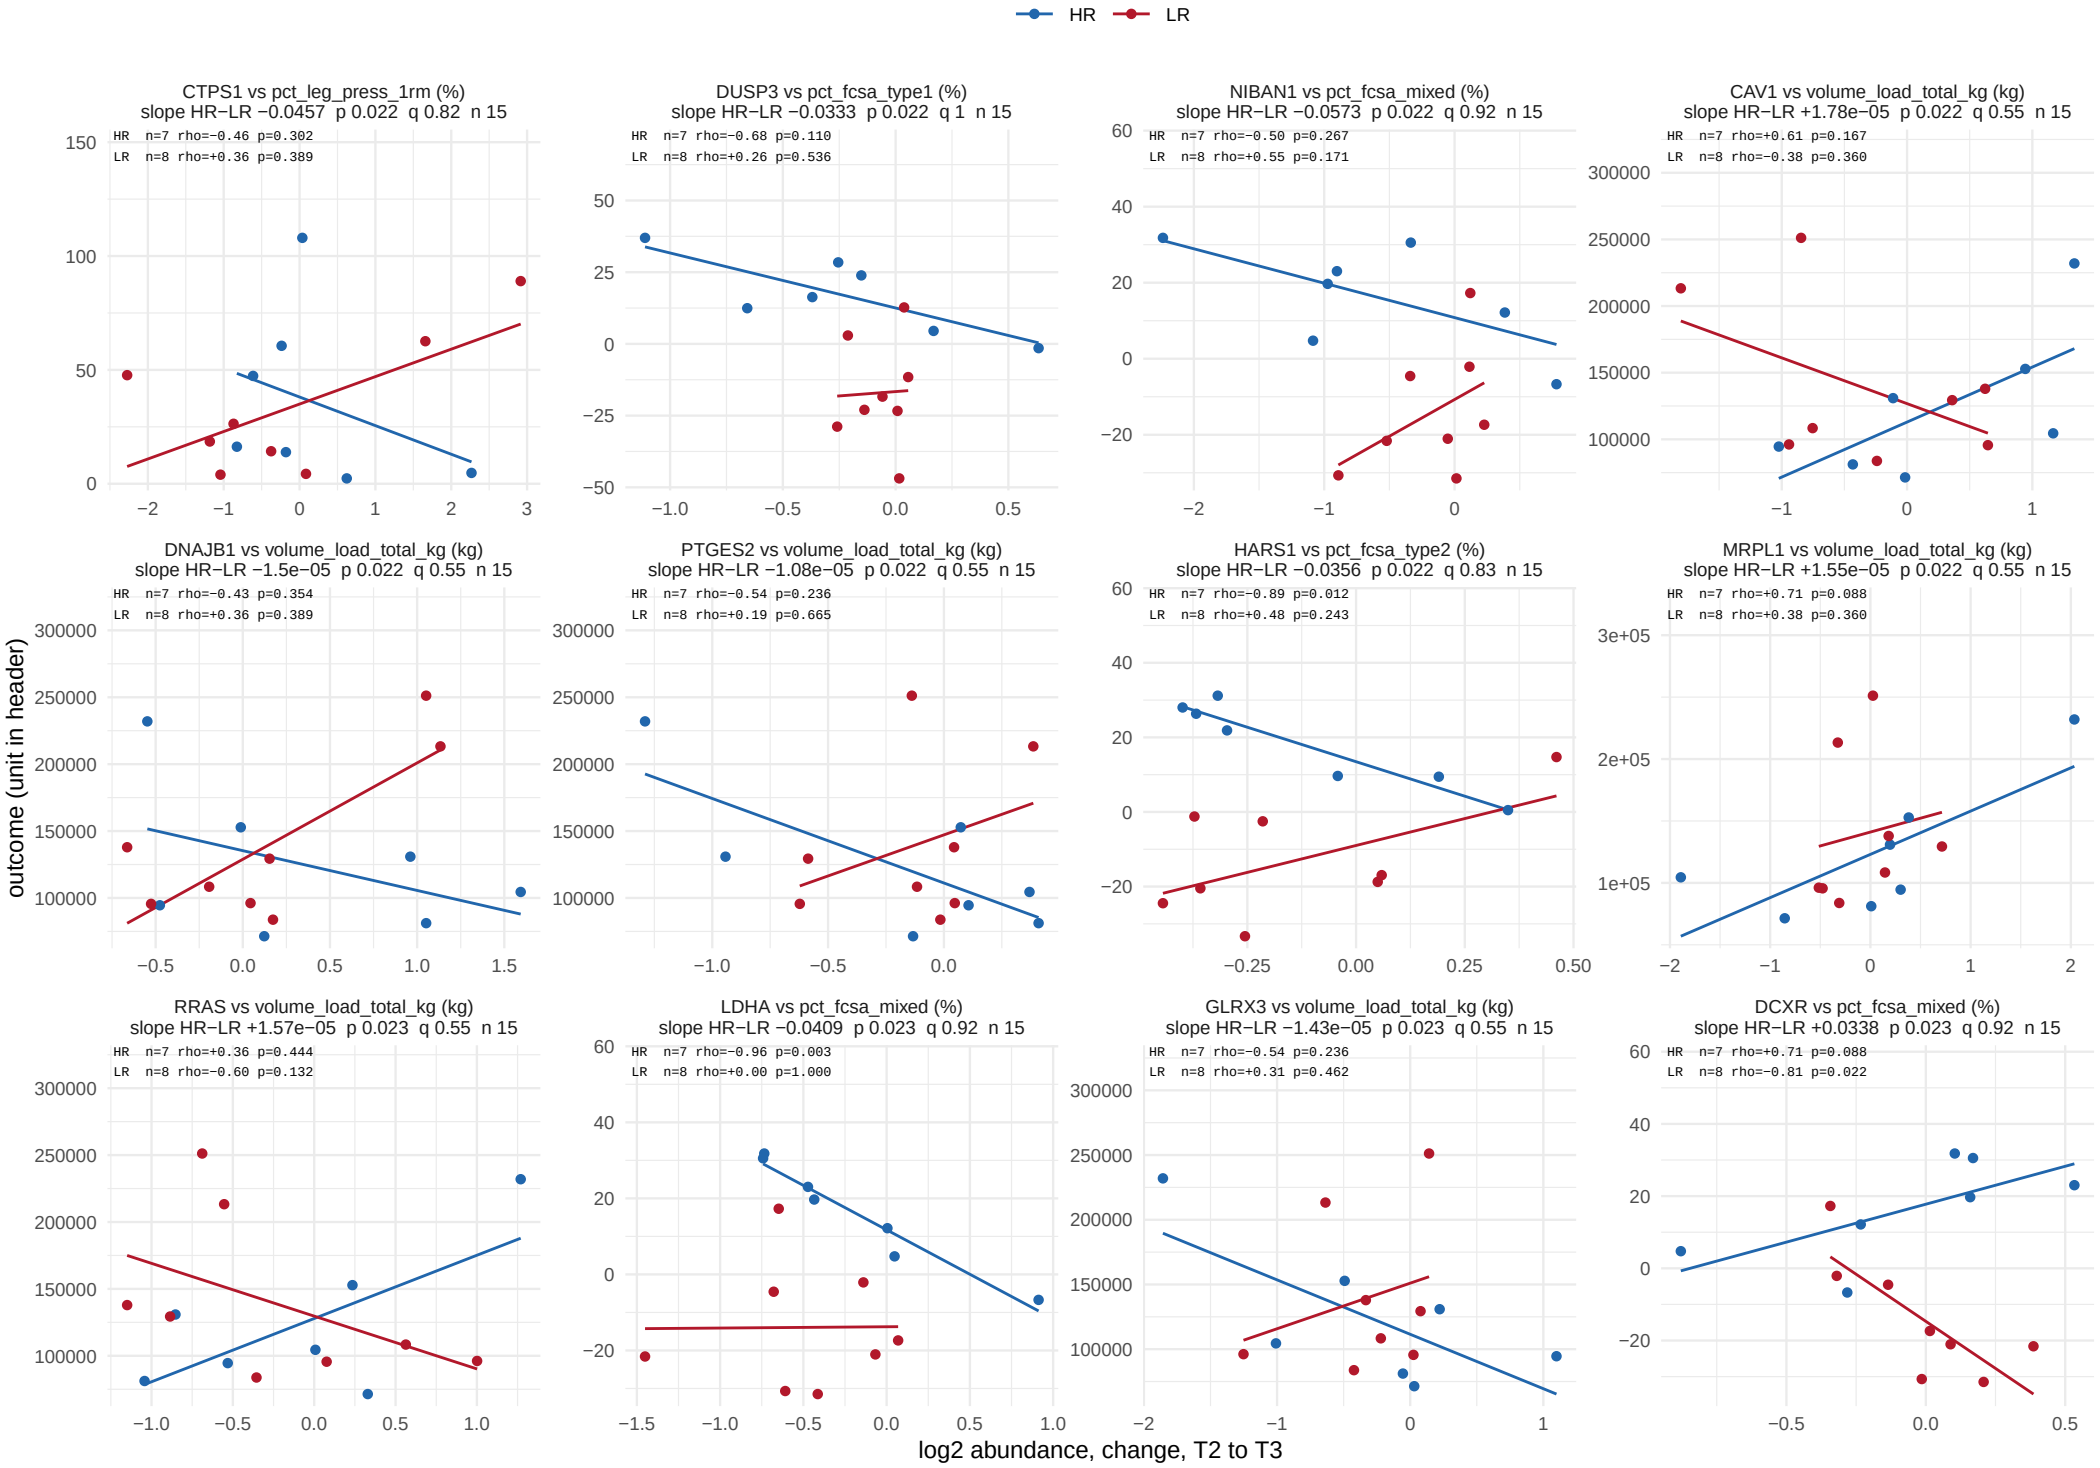

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


645 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 24 of 54.

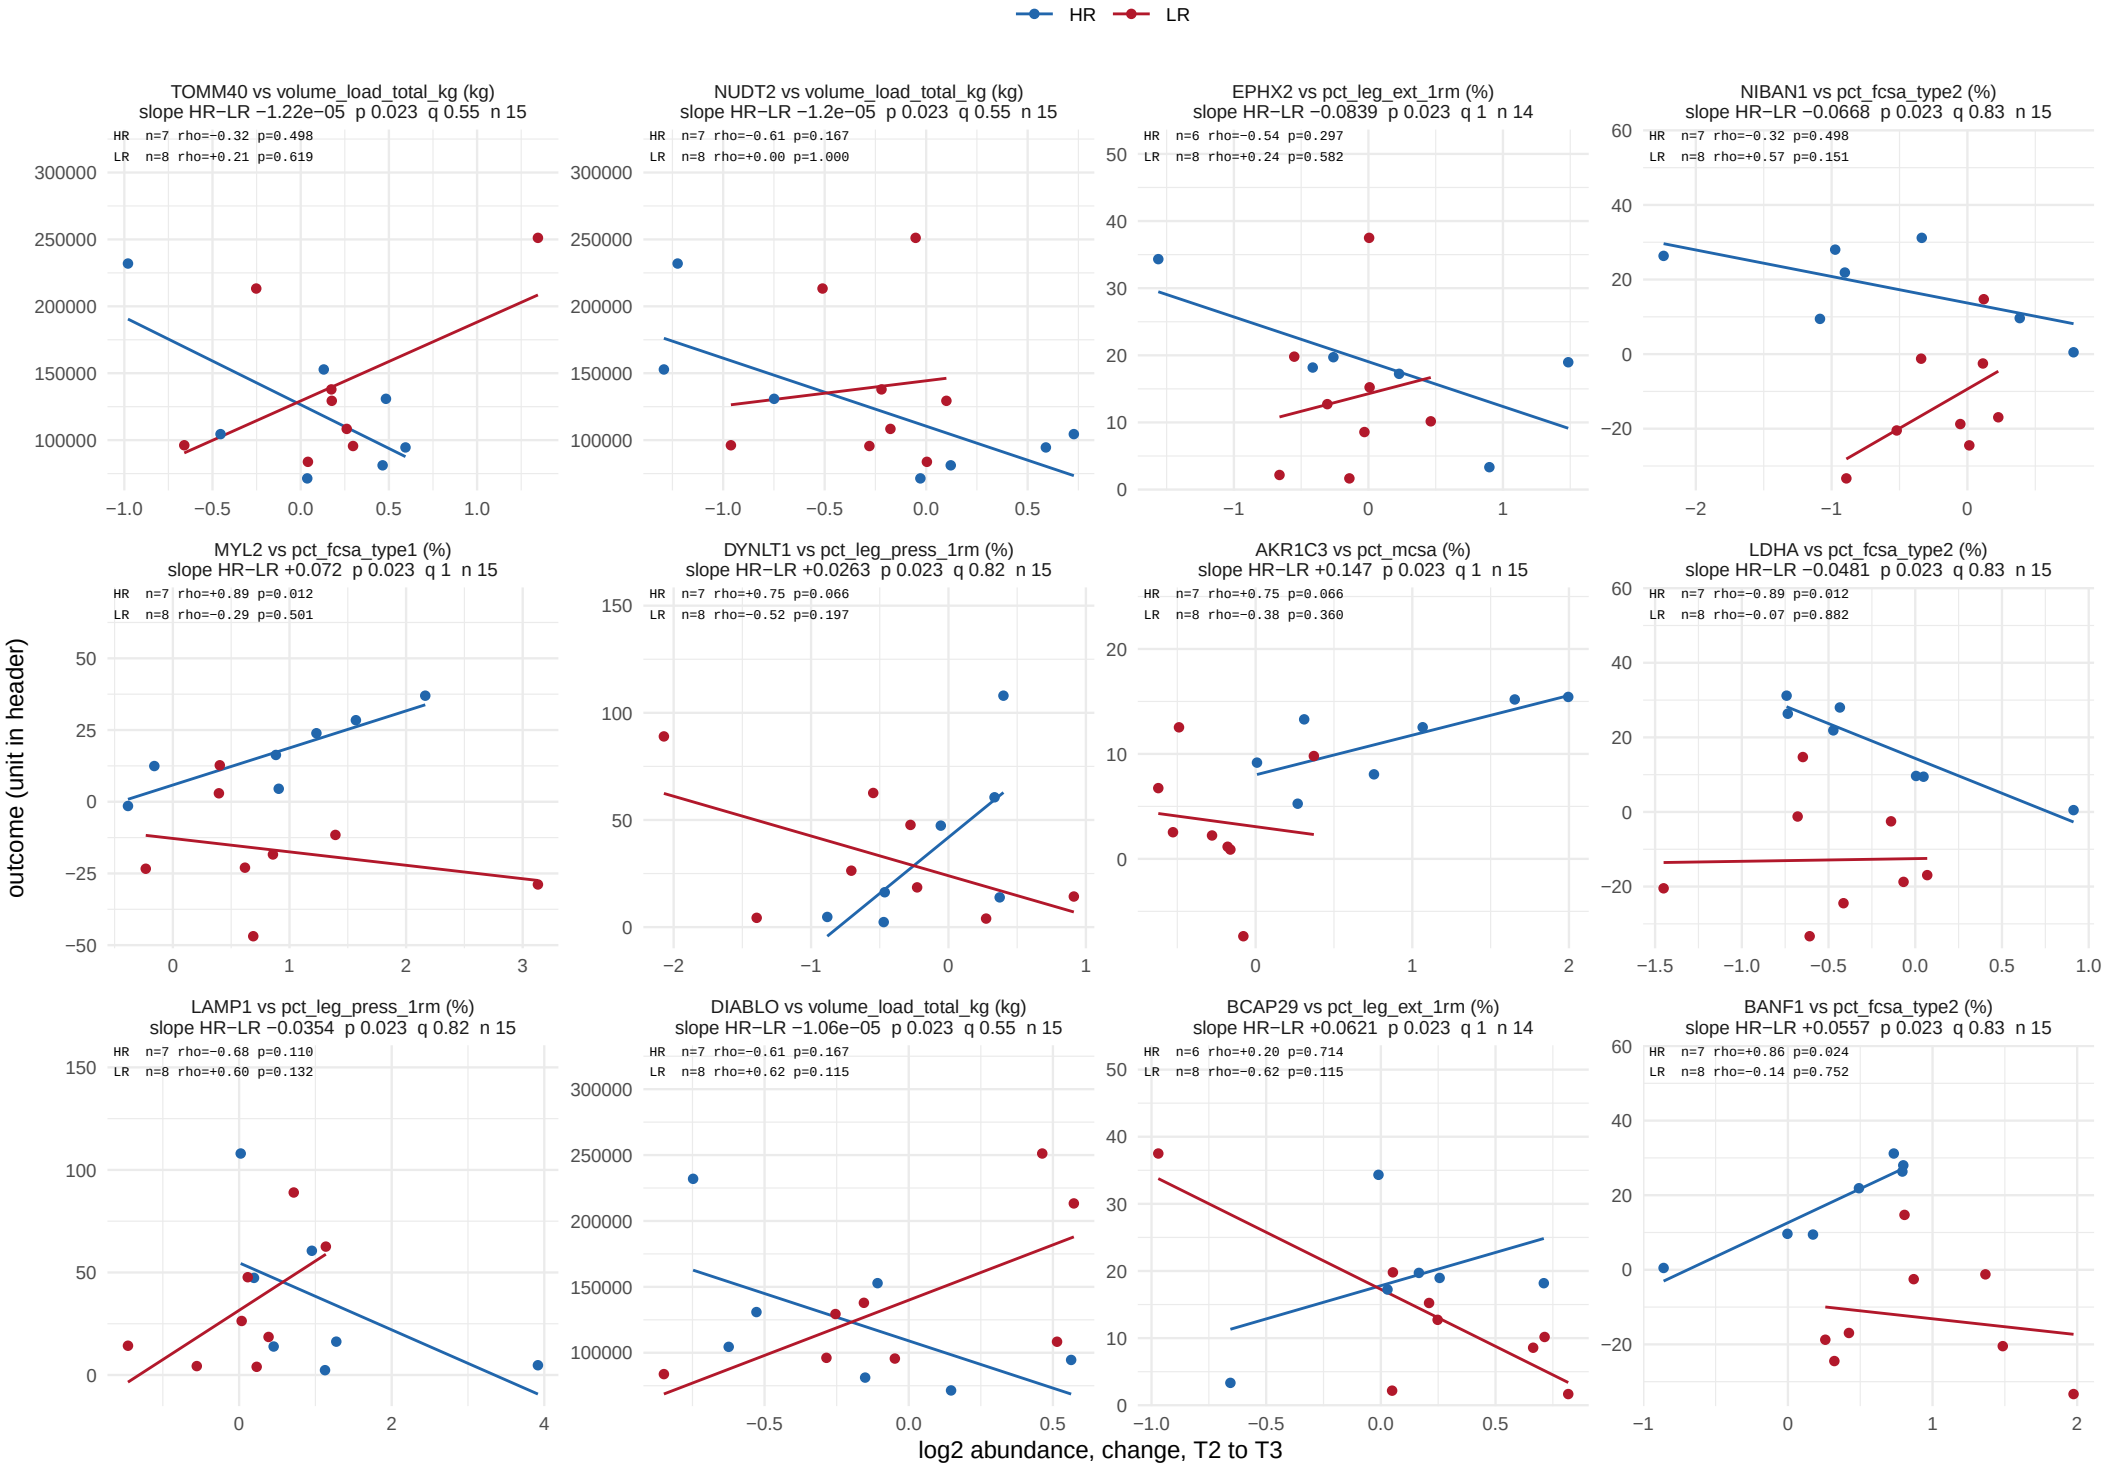

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


645 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 25 of 54.

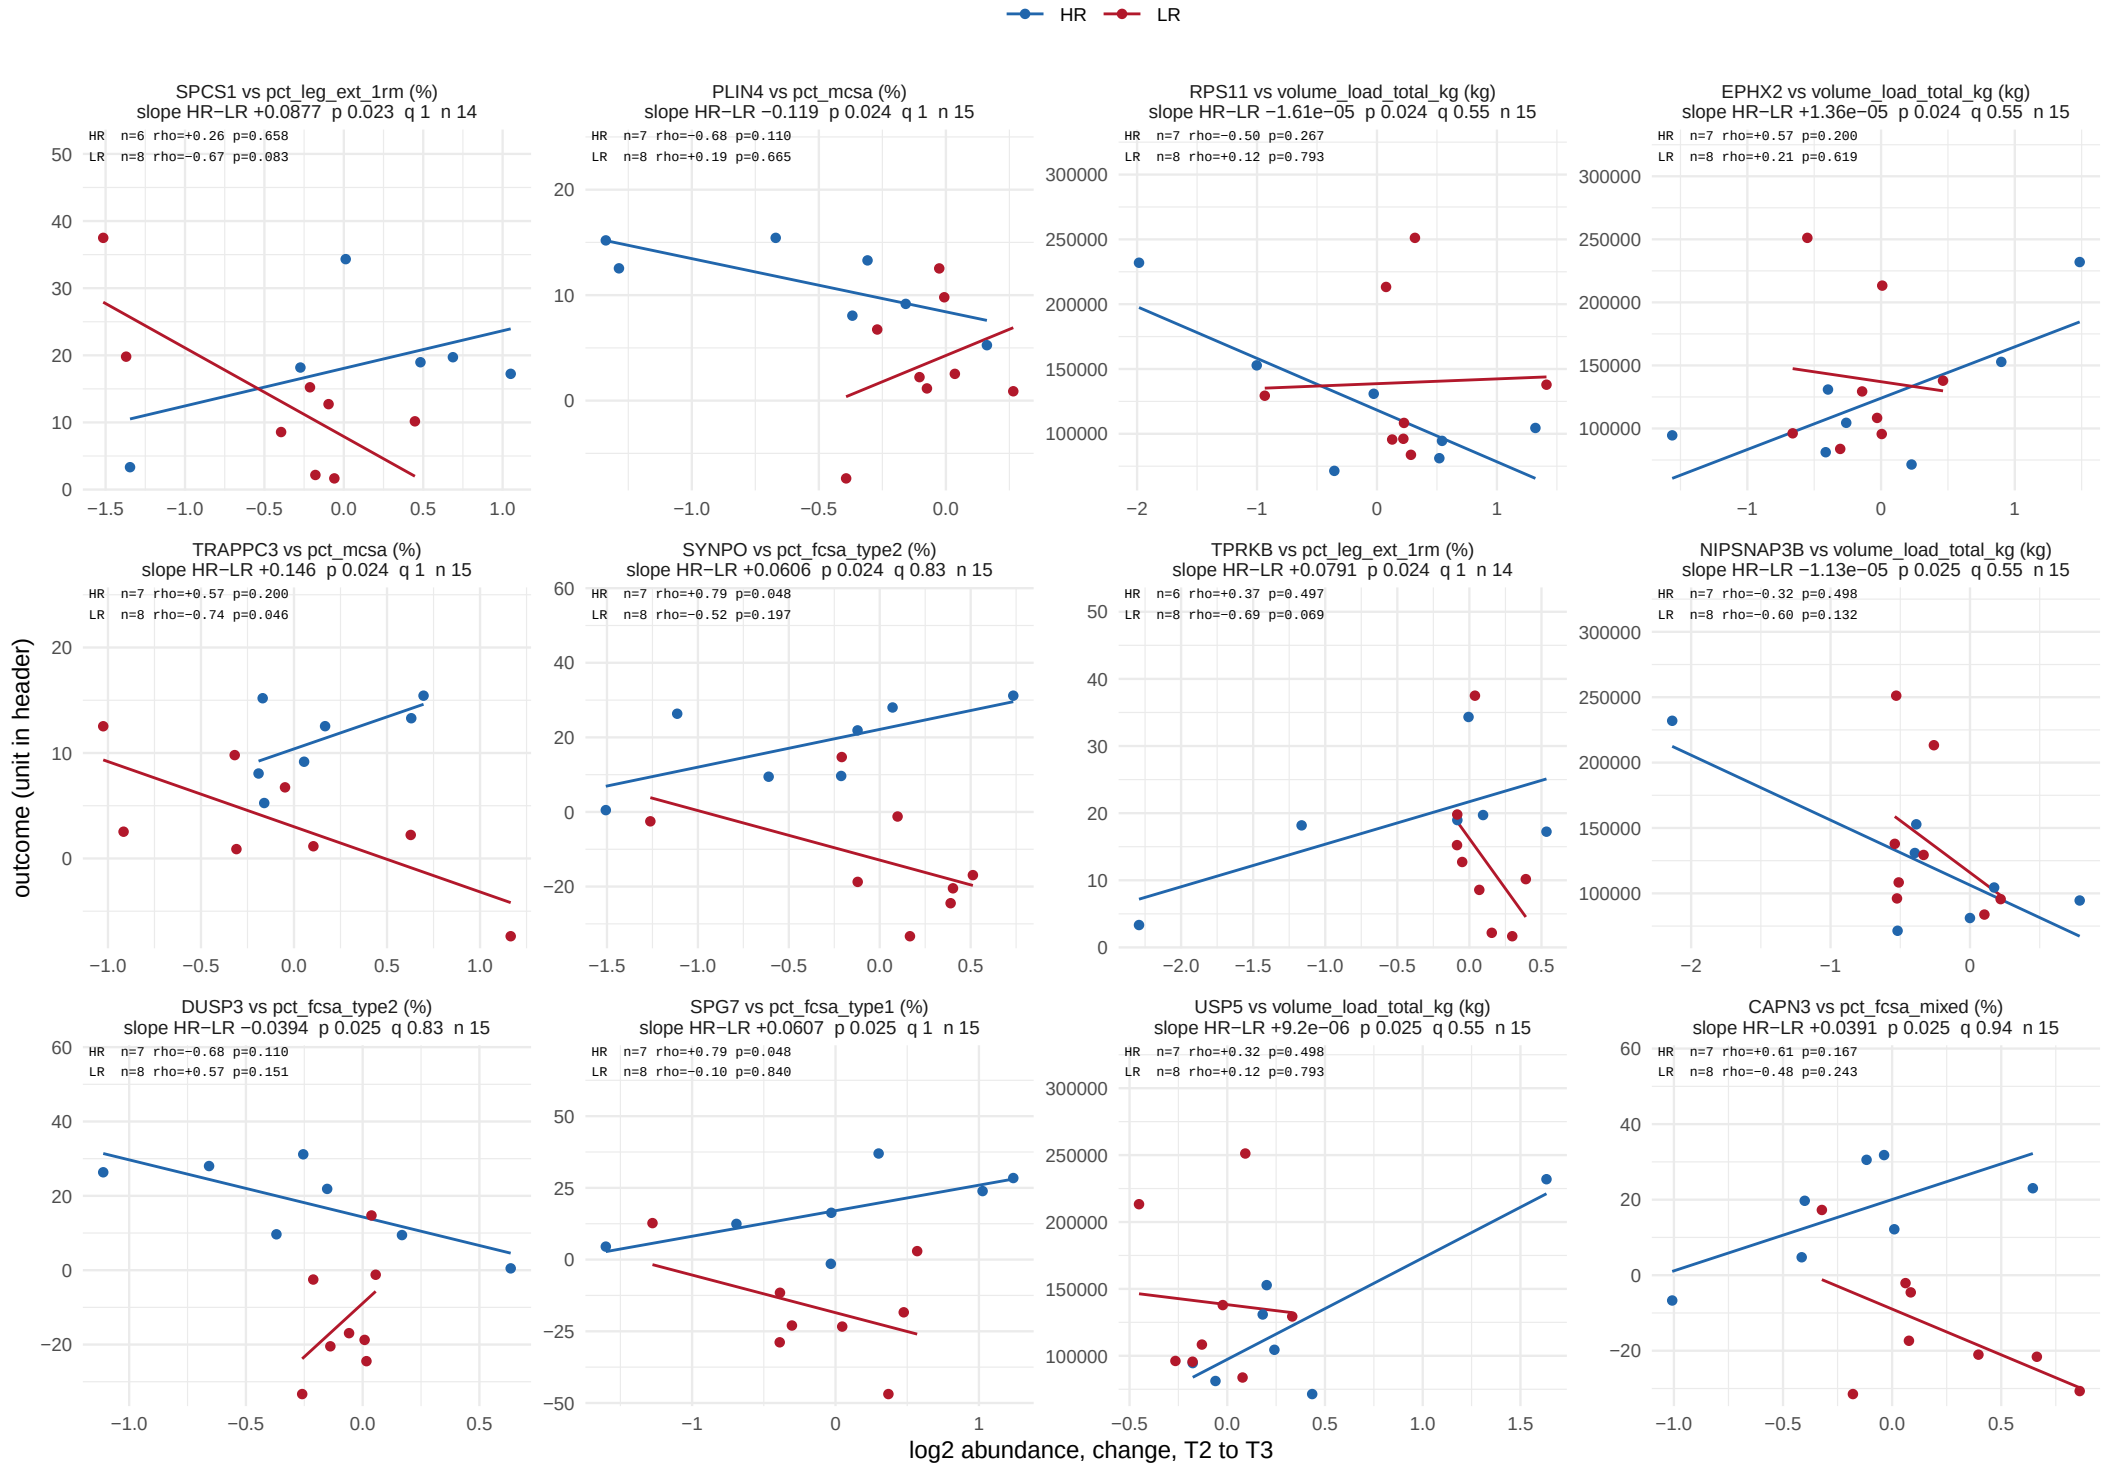

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


645 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 26 of 54.

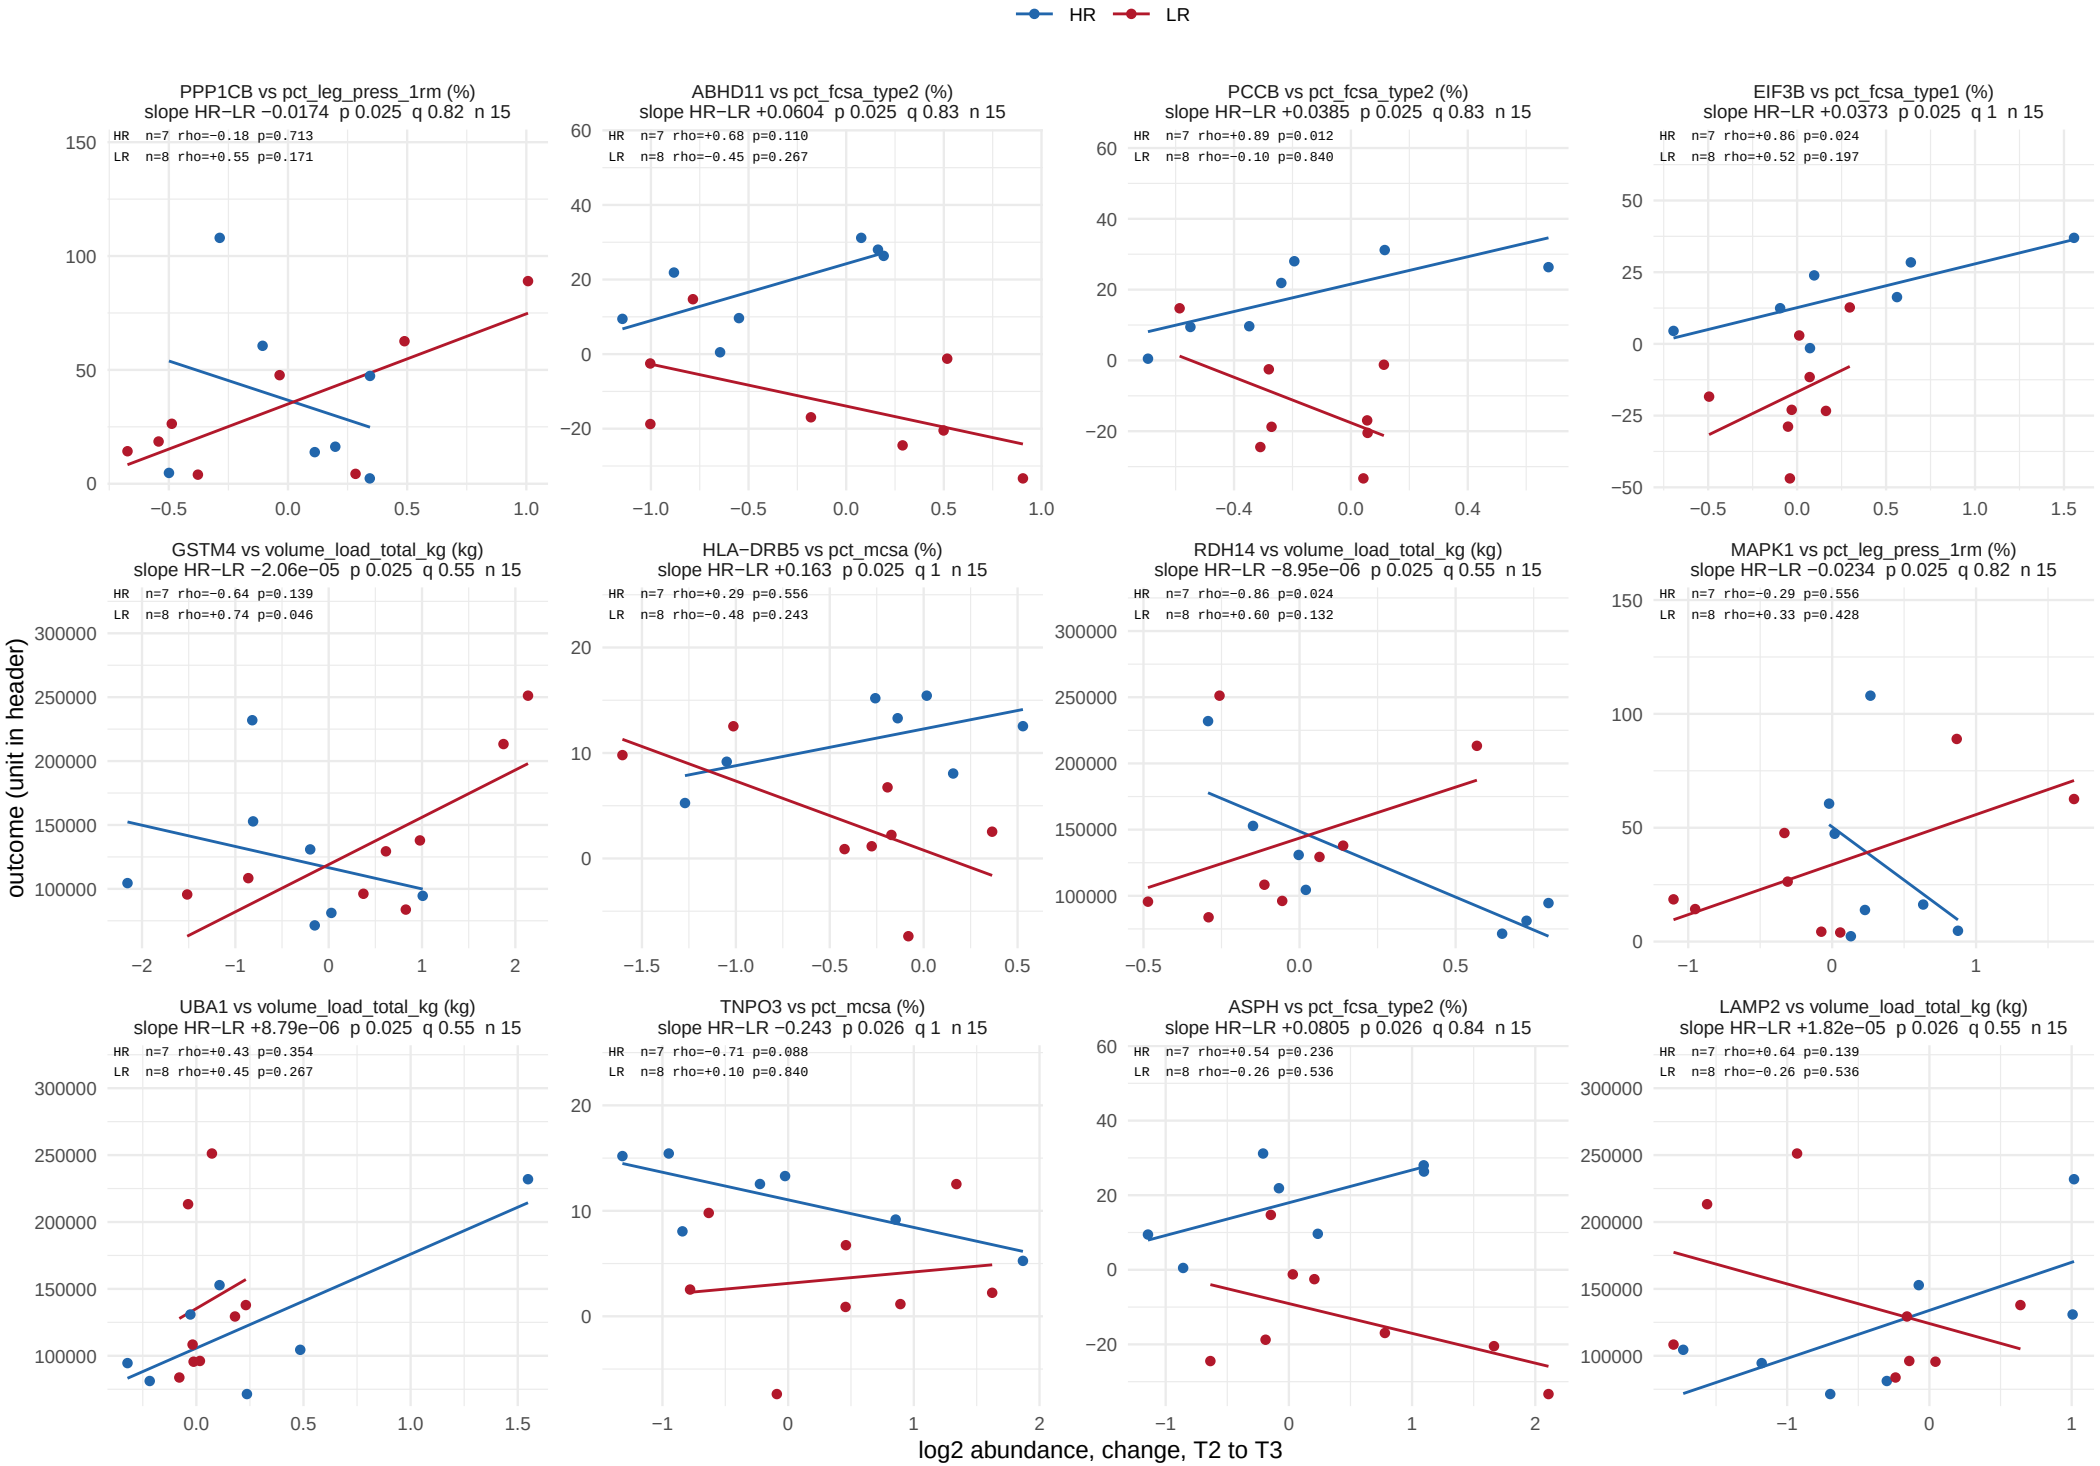

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


645 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 27 of 54.

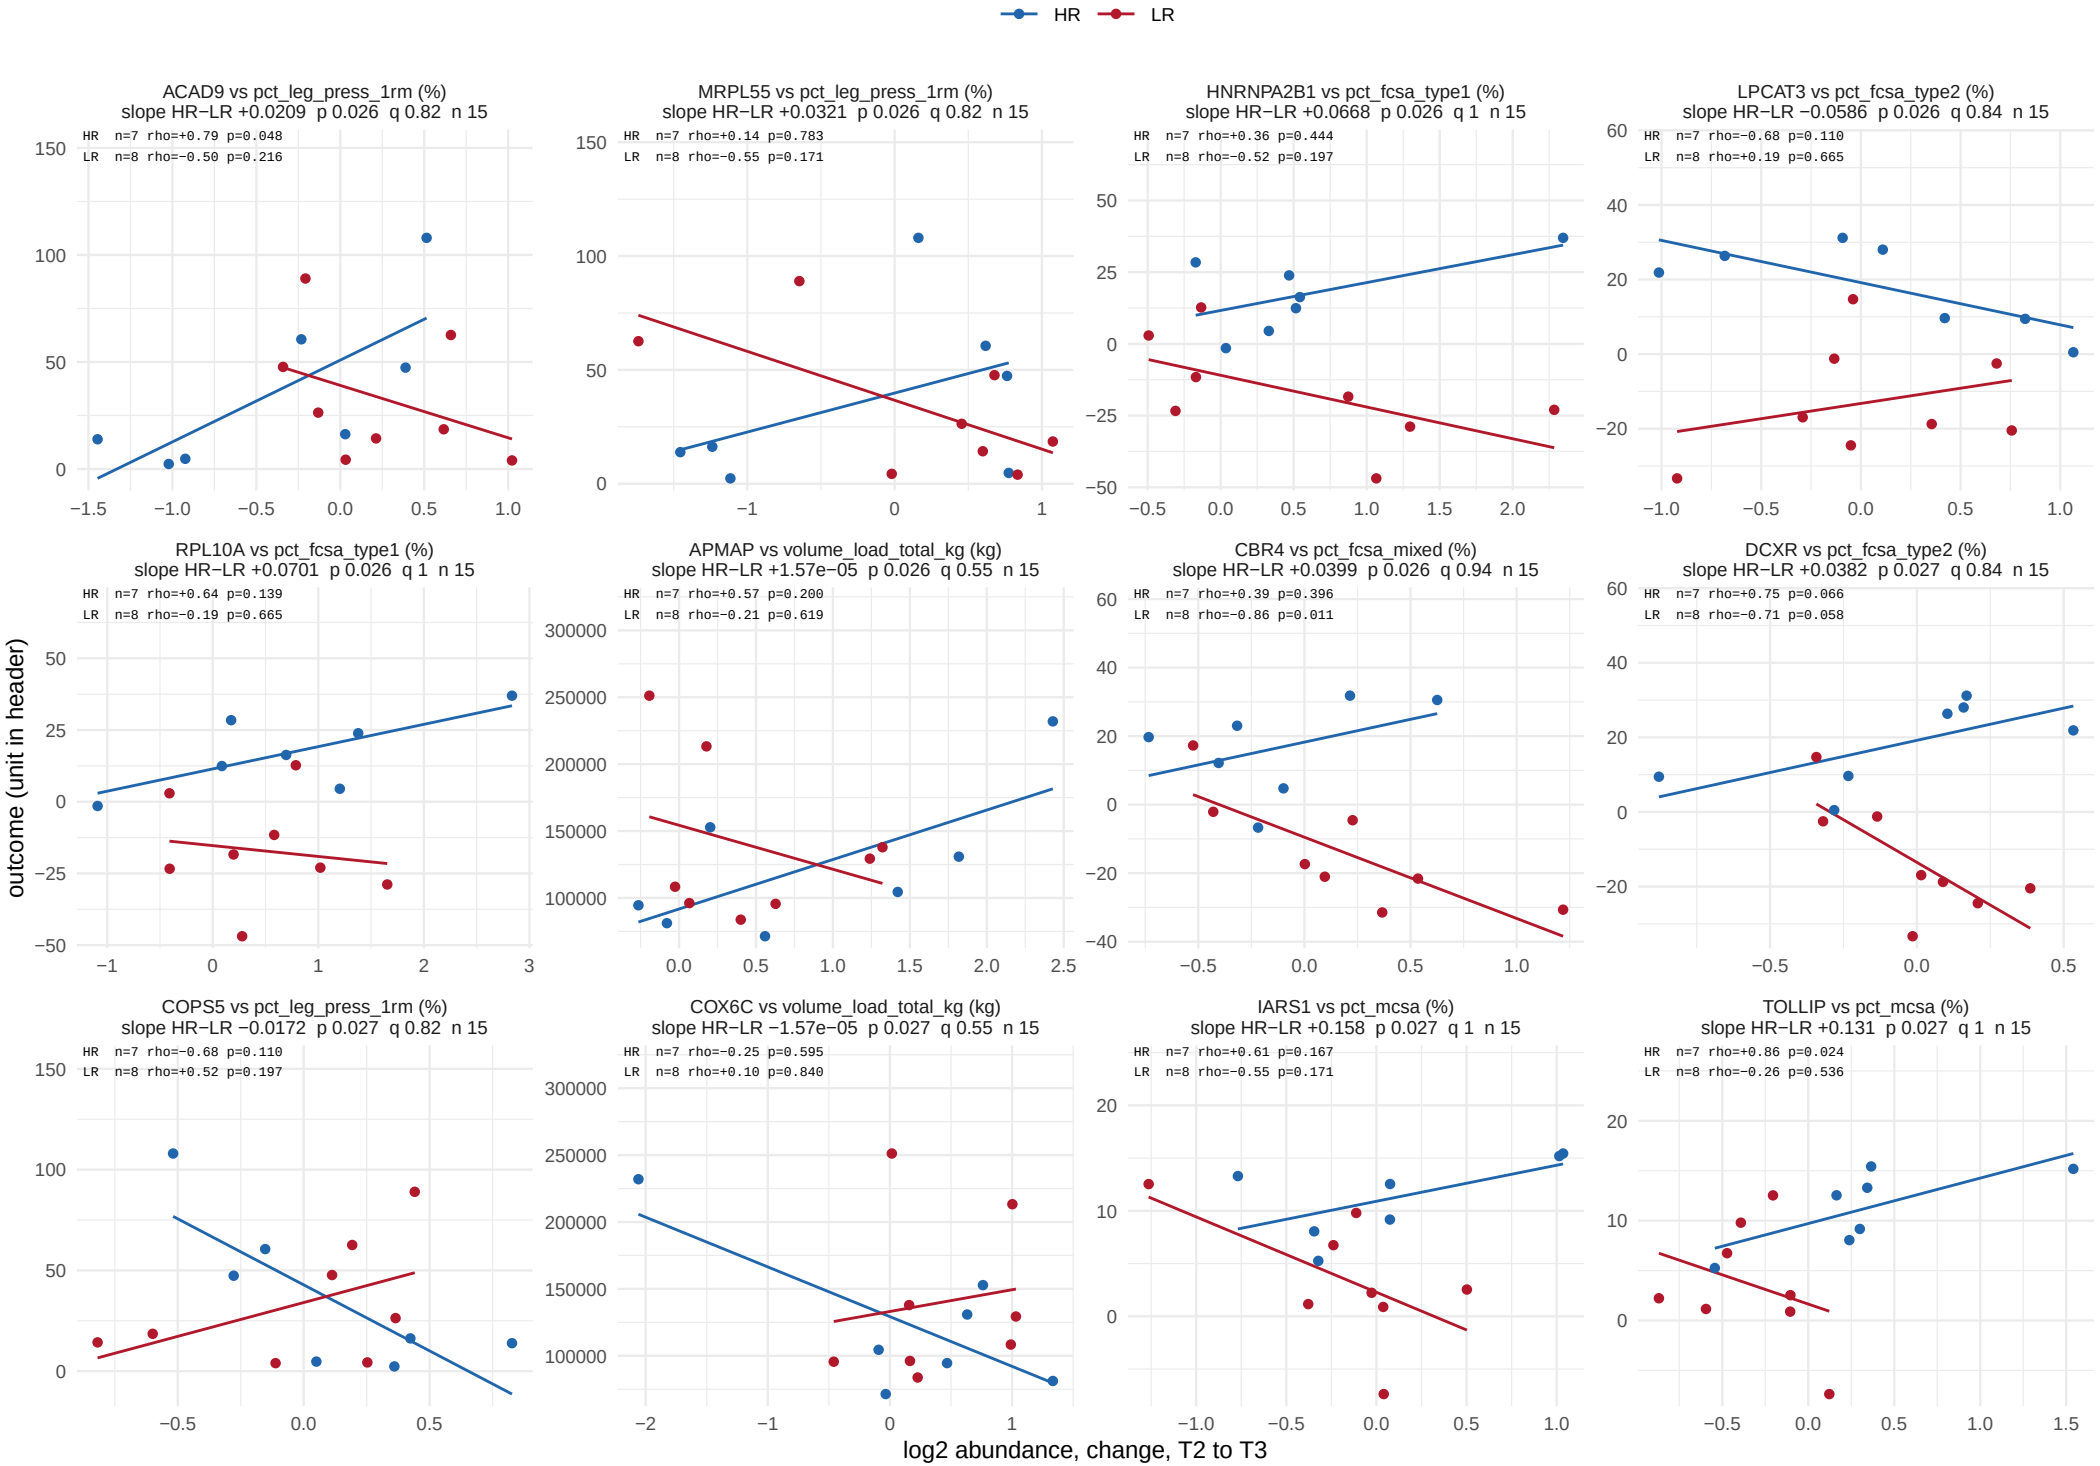

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


645 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 28 of 54.

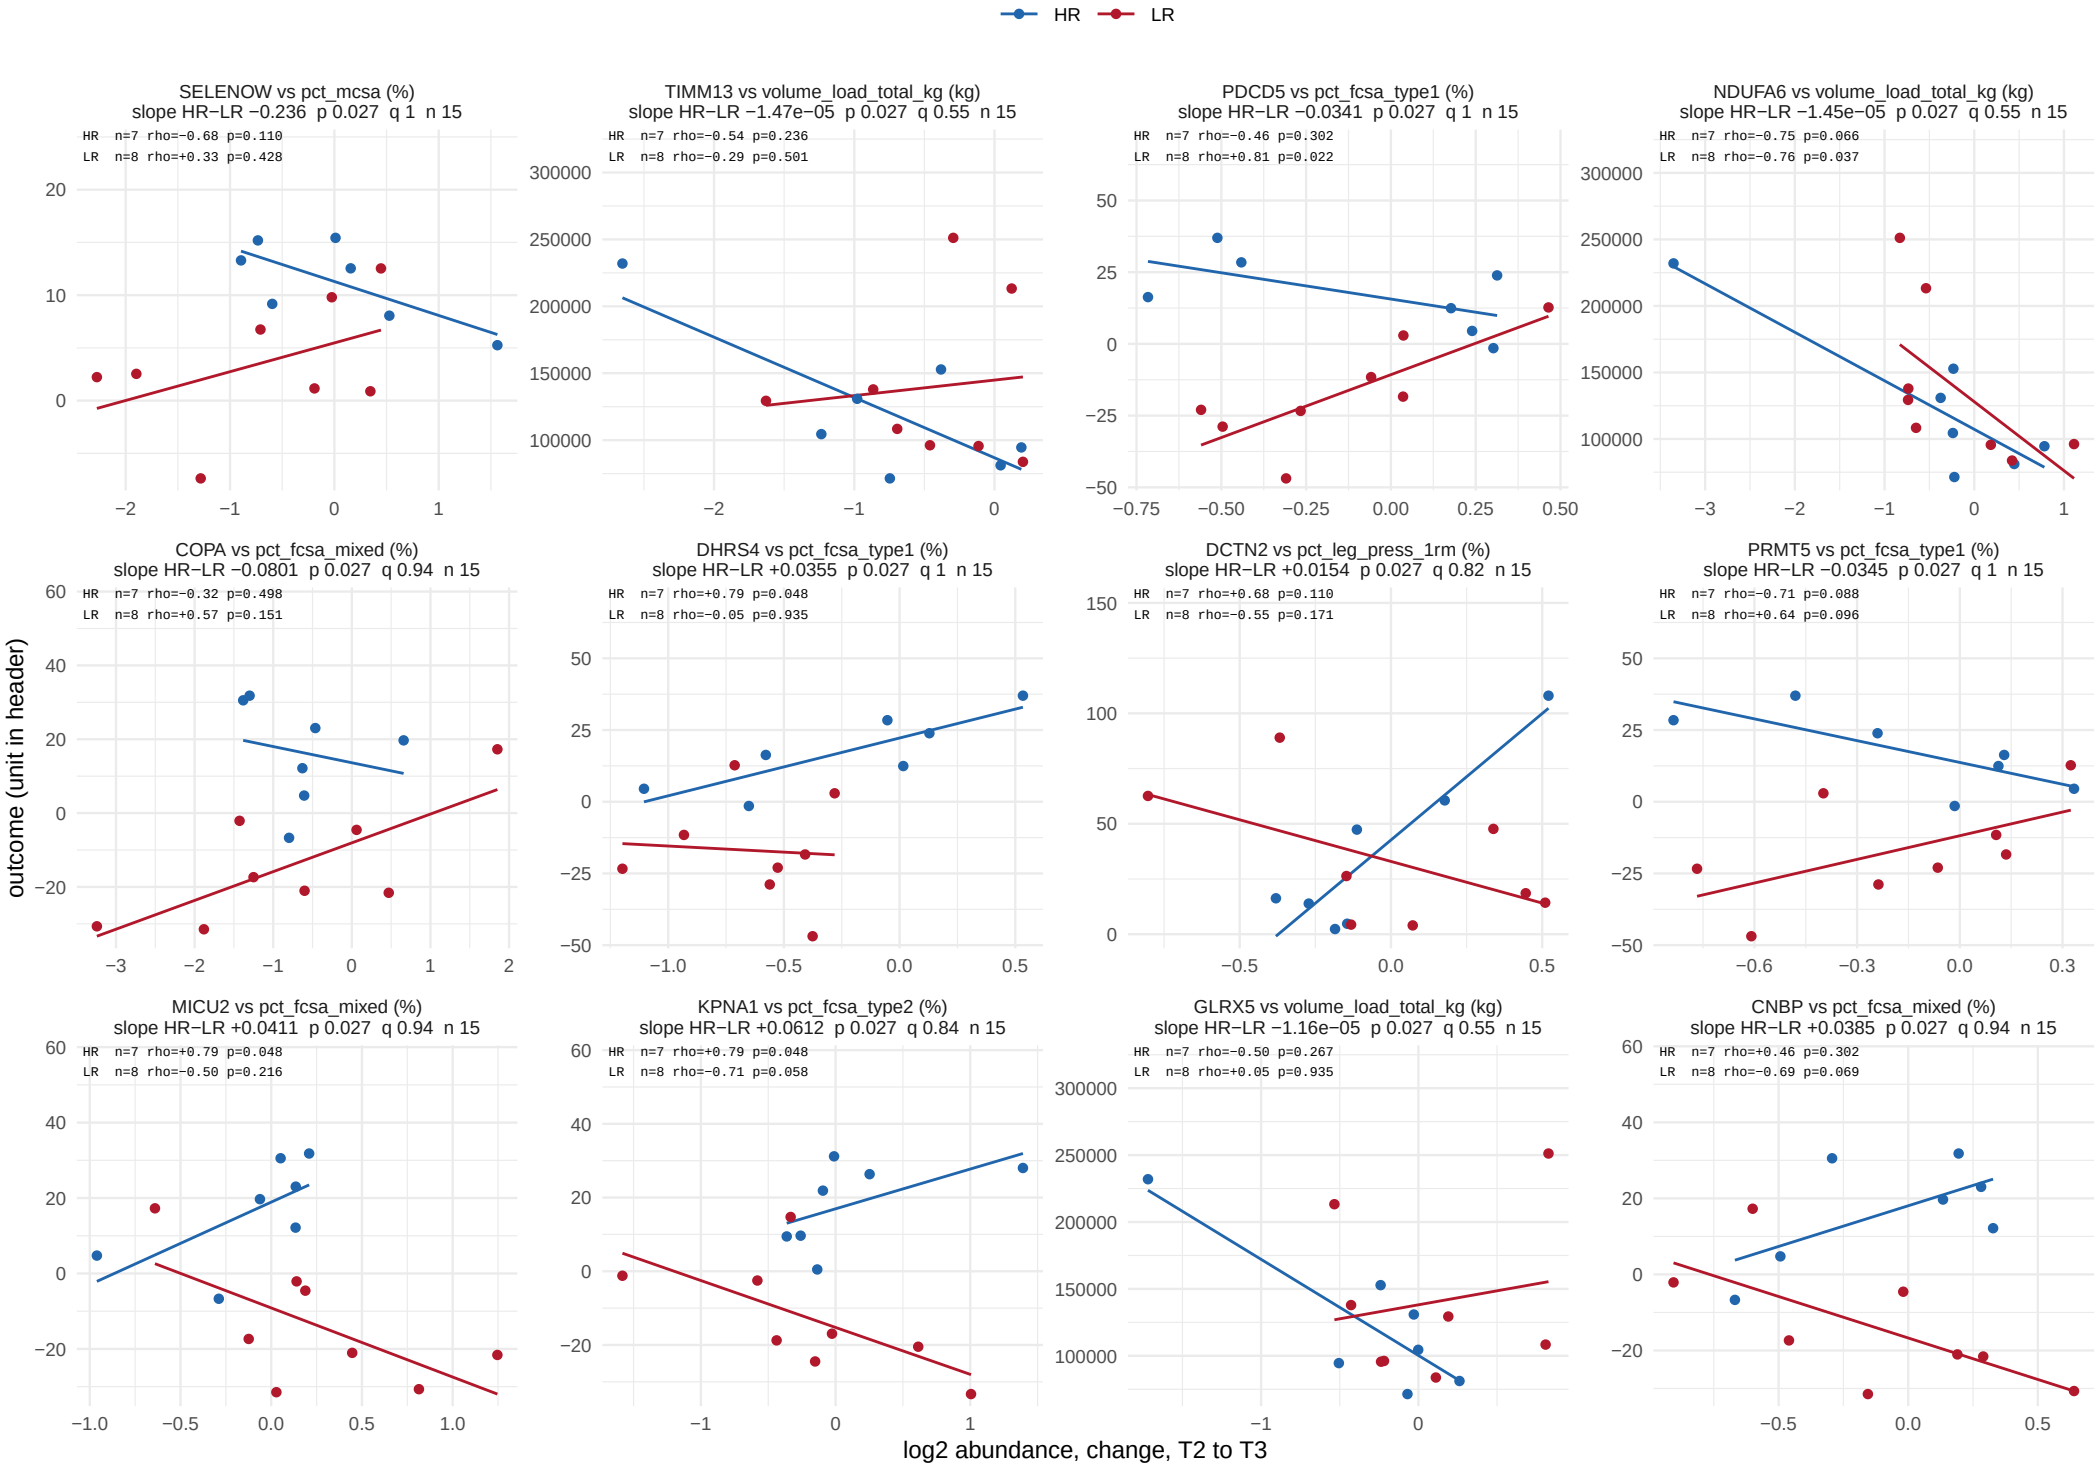

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


645 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 29 of 54.

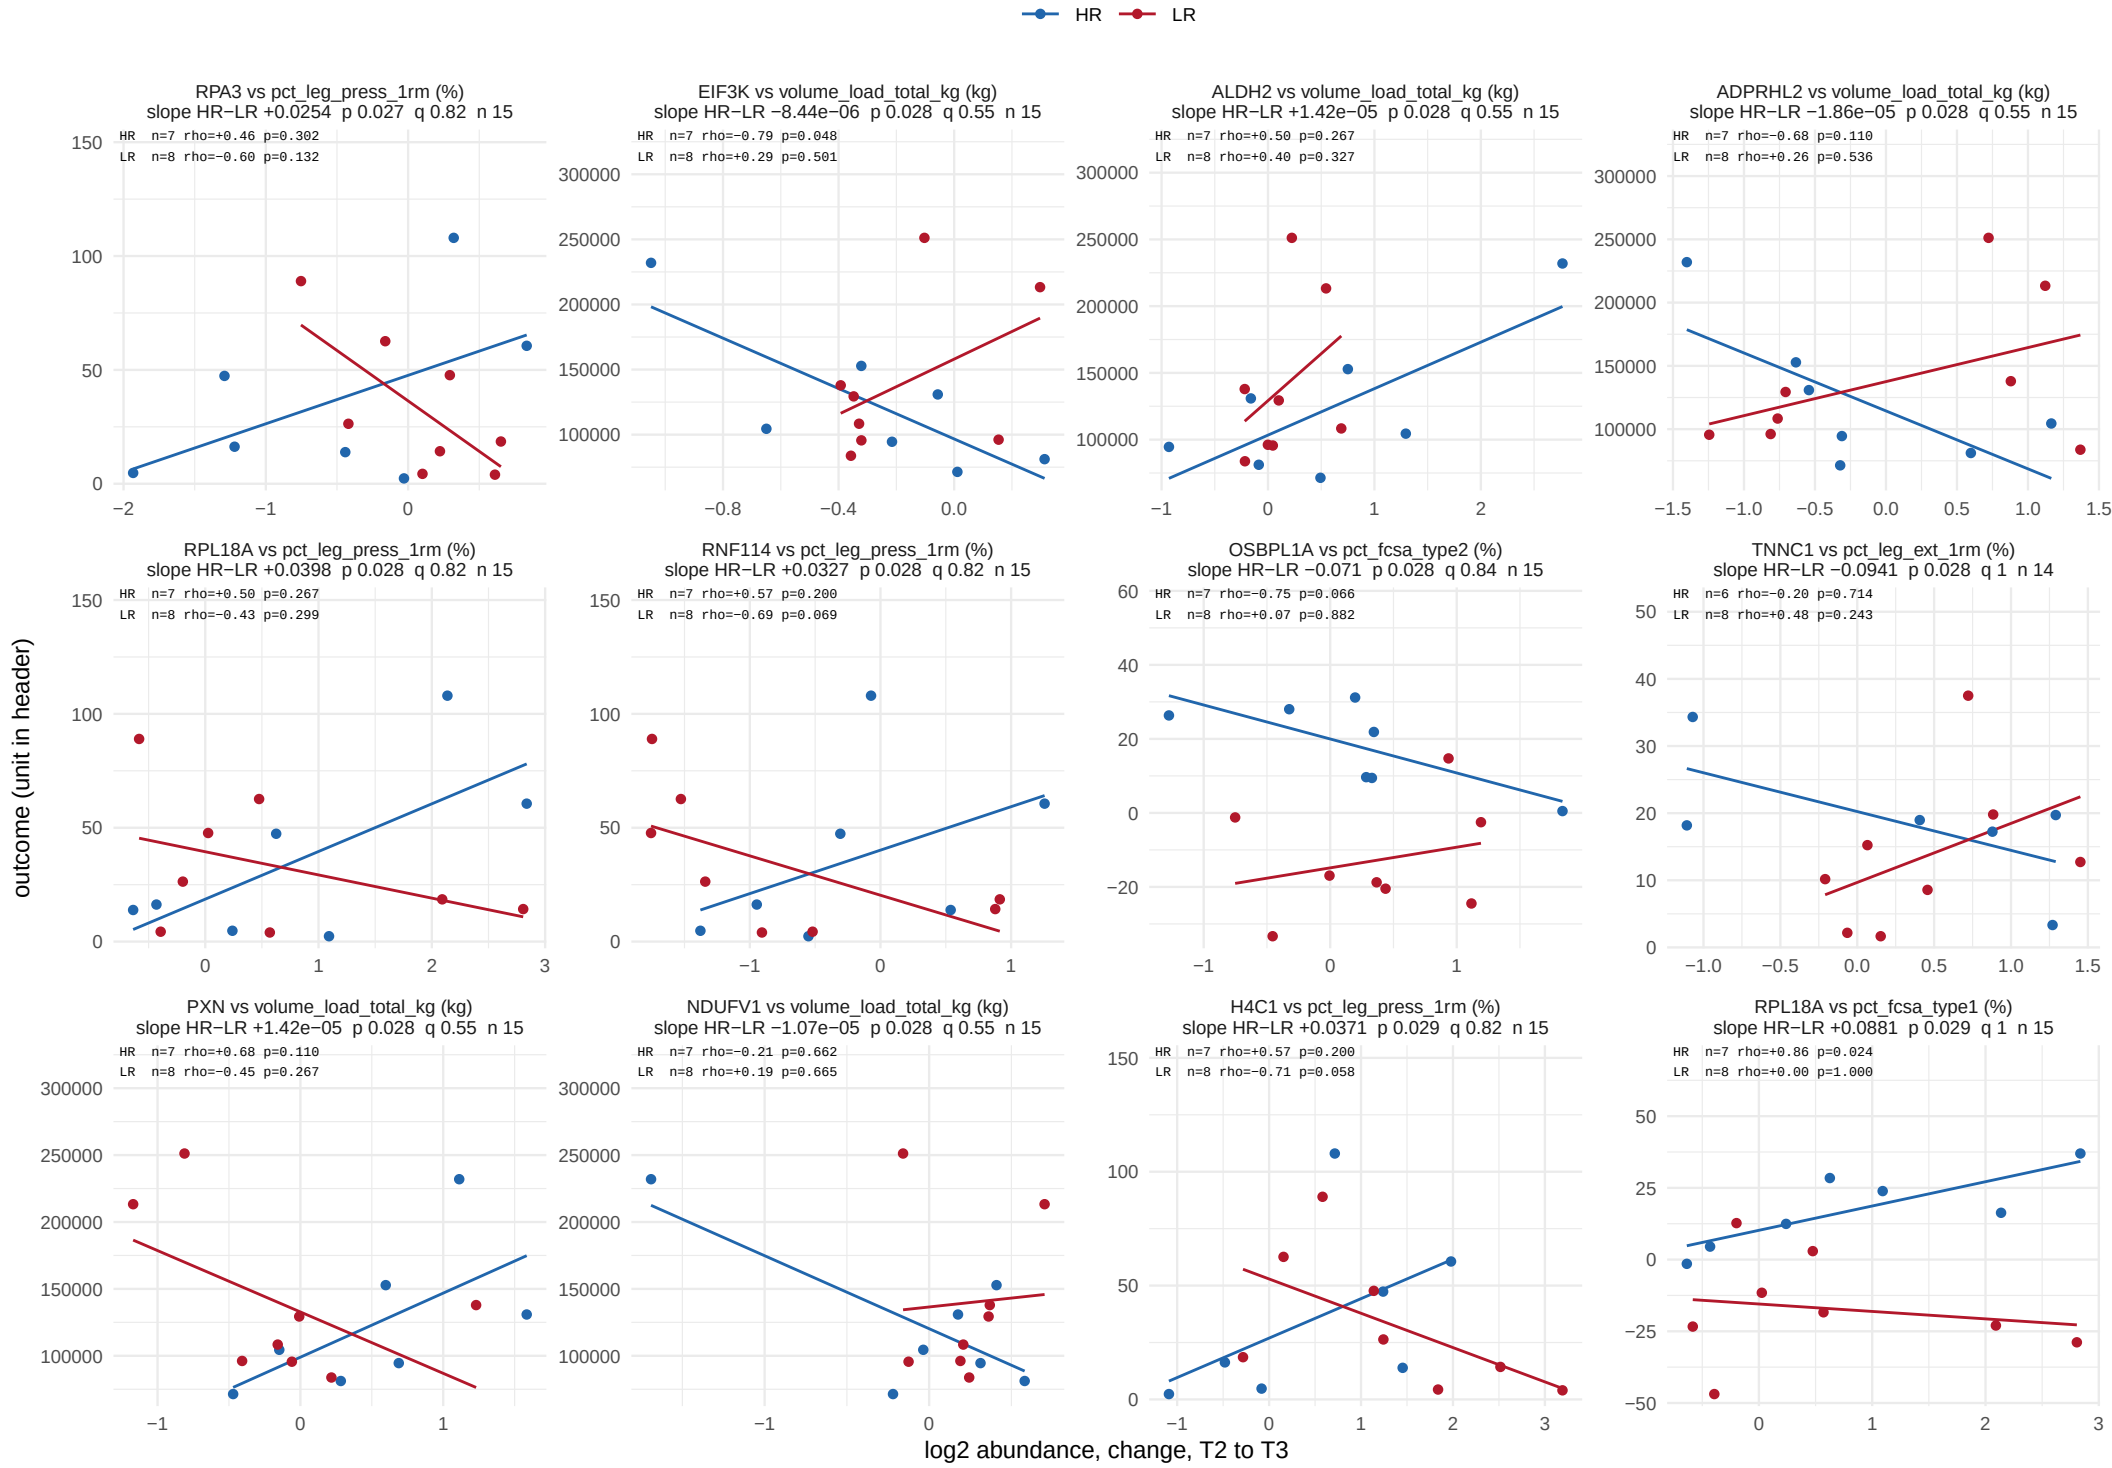

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


645 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 30 of 54.

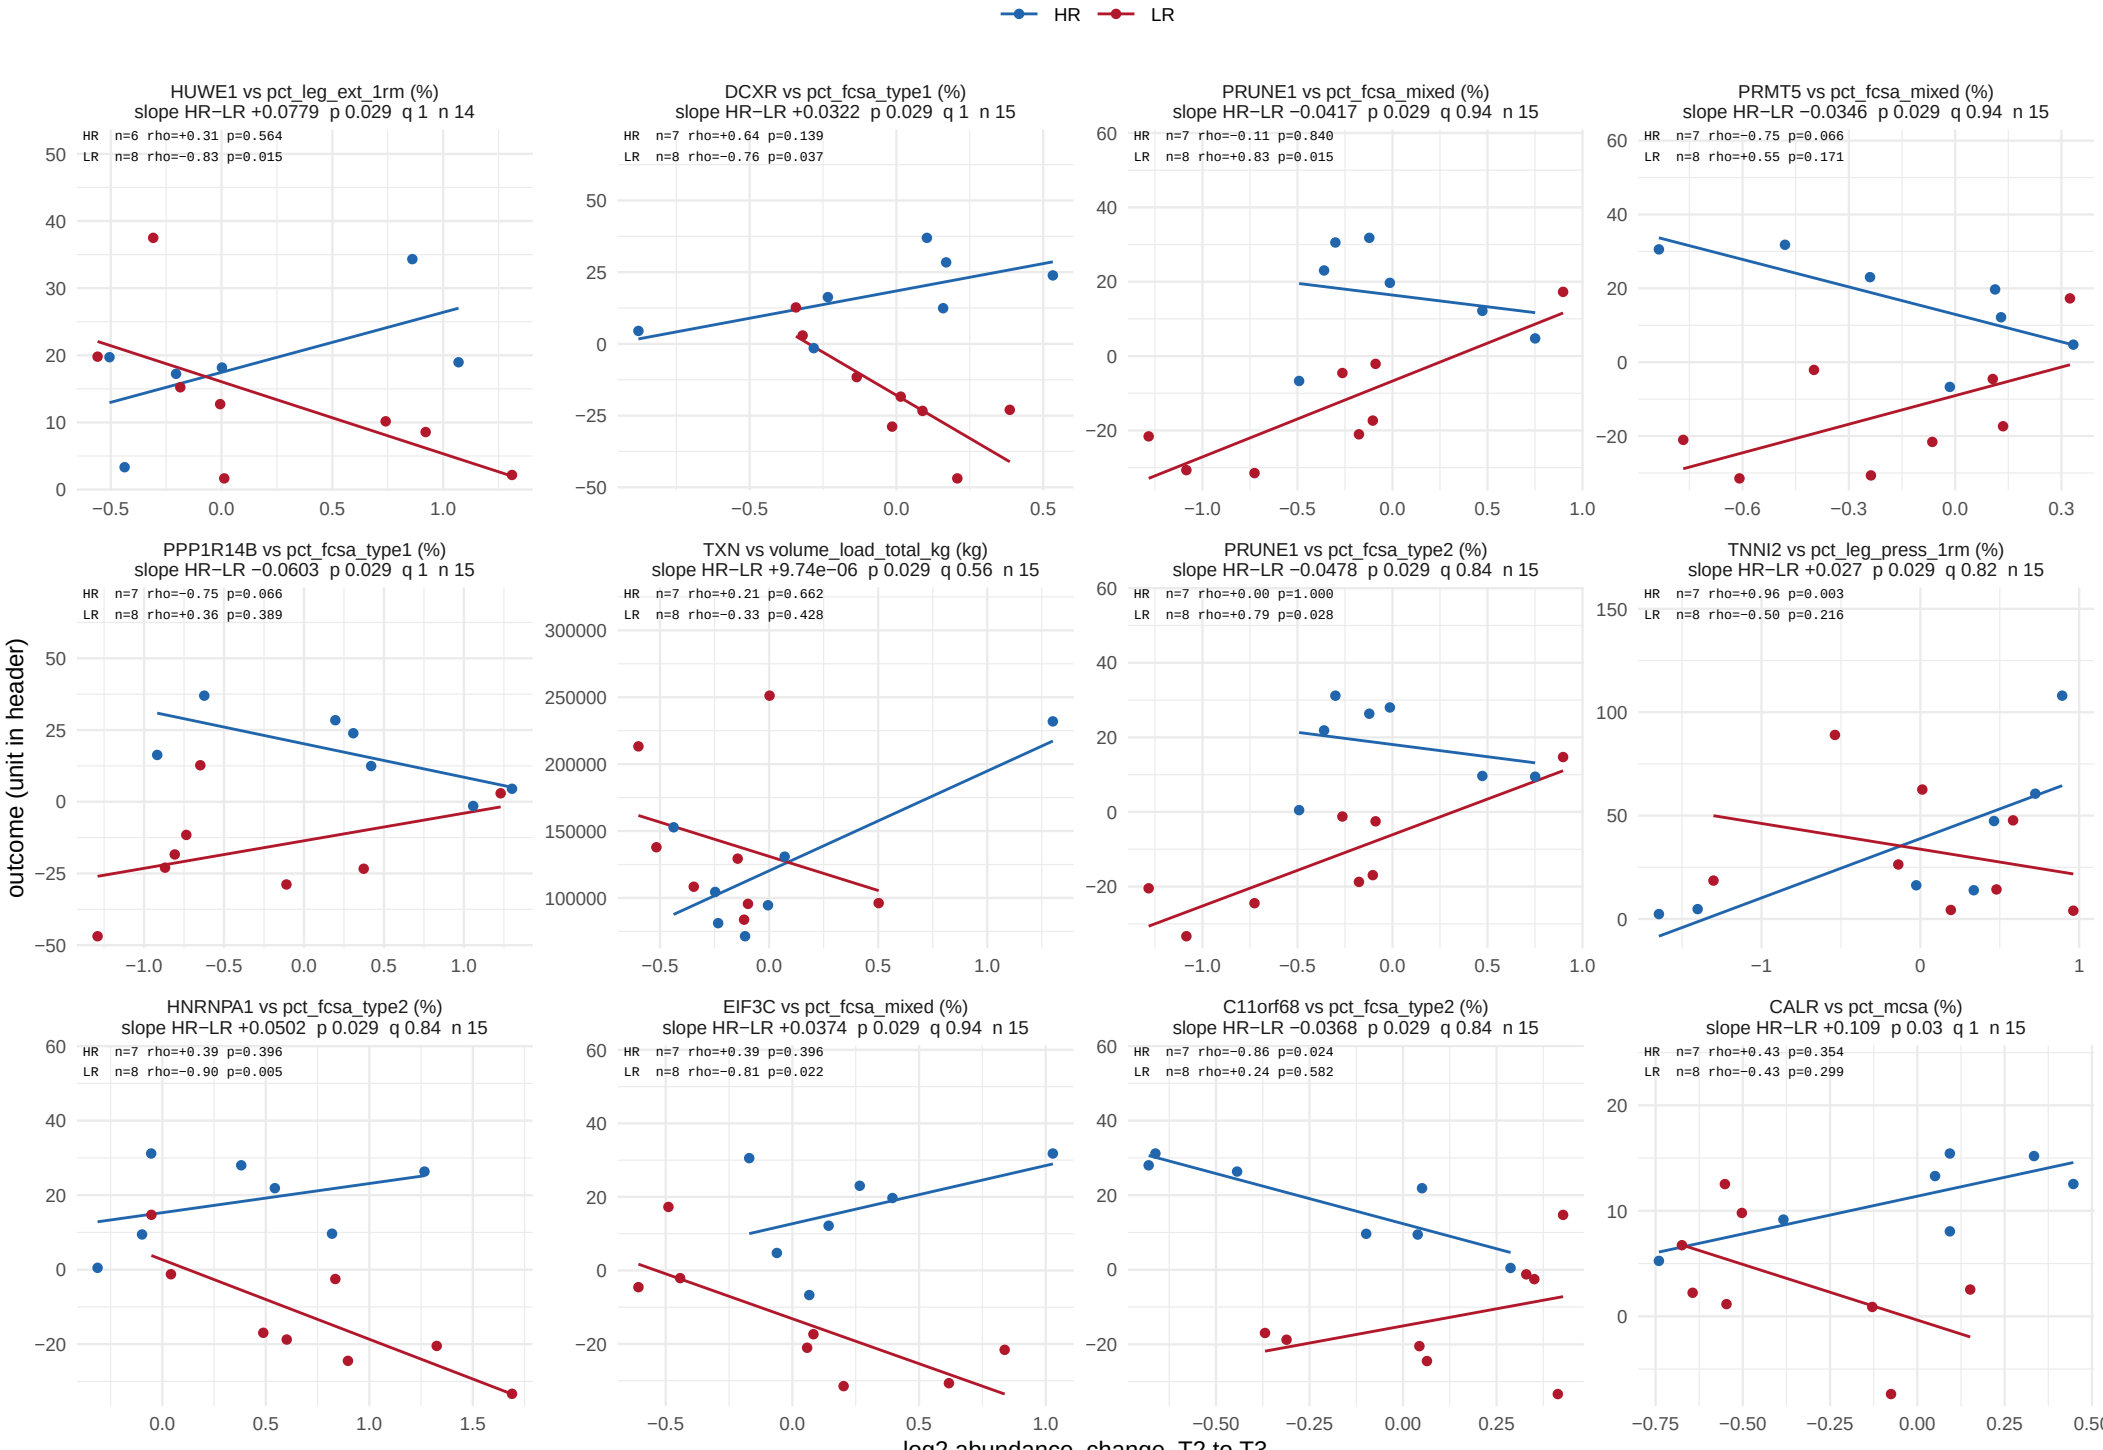

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


645 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 31 of 54.

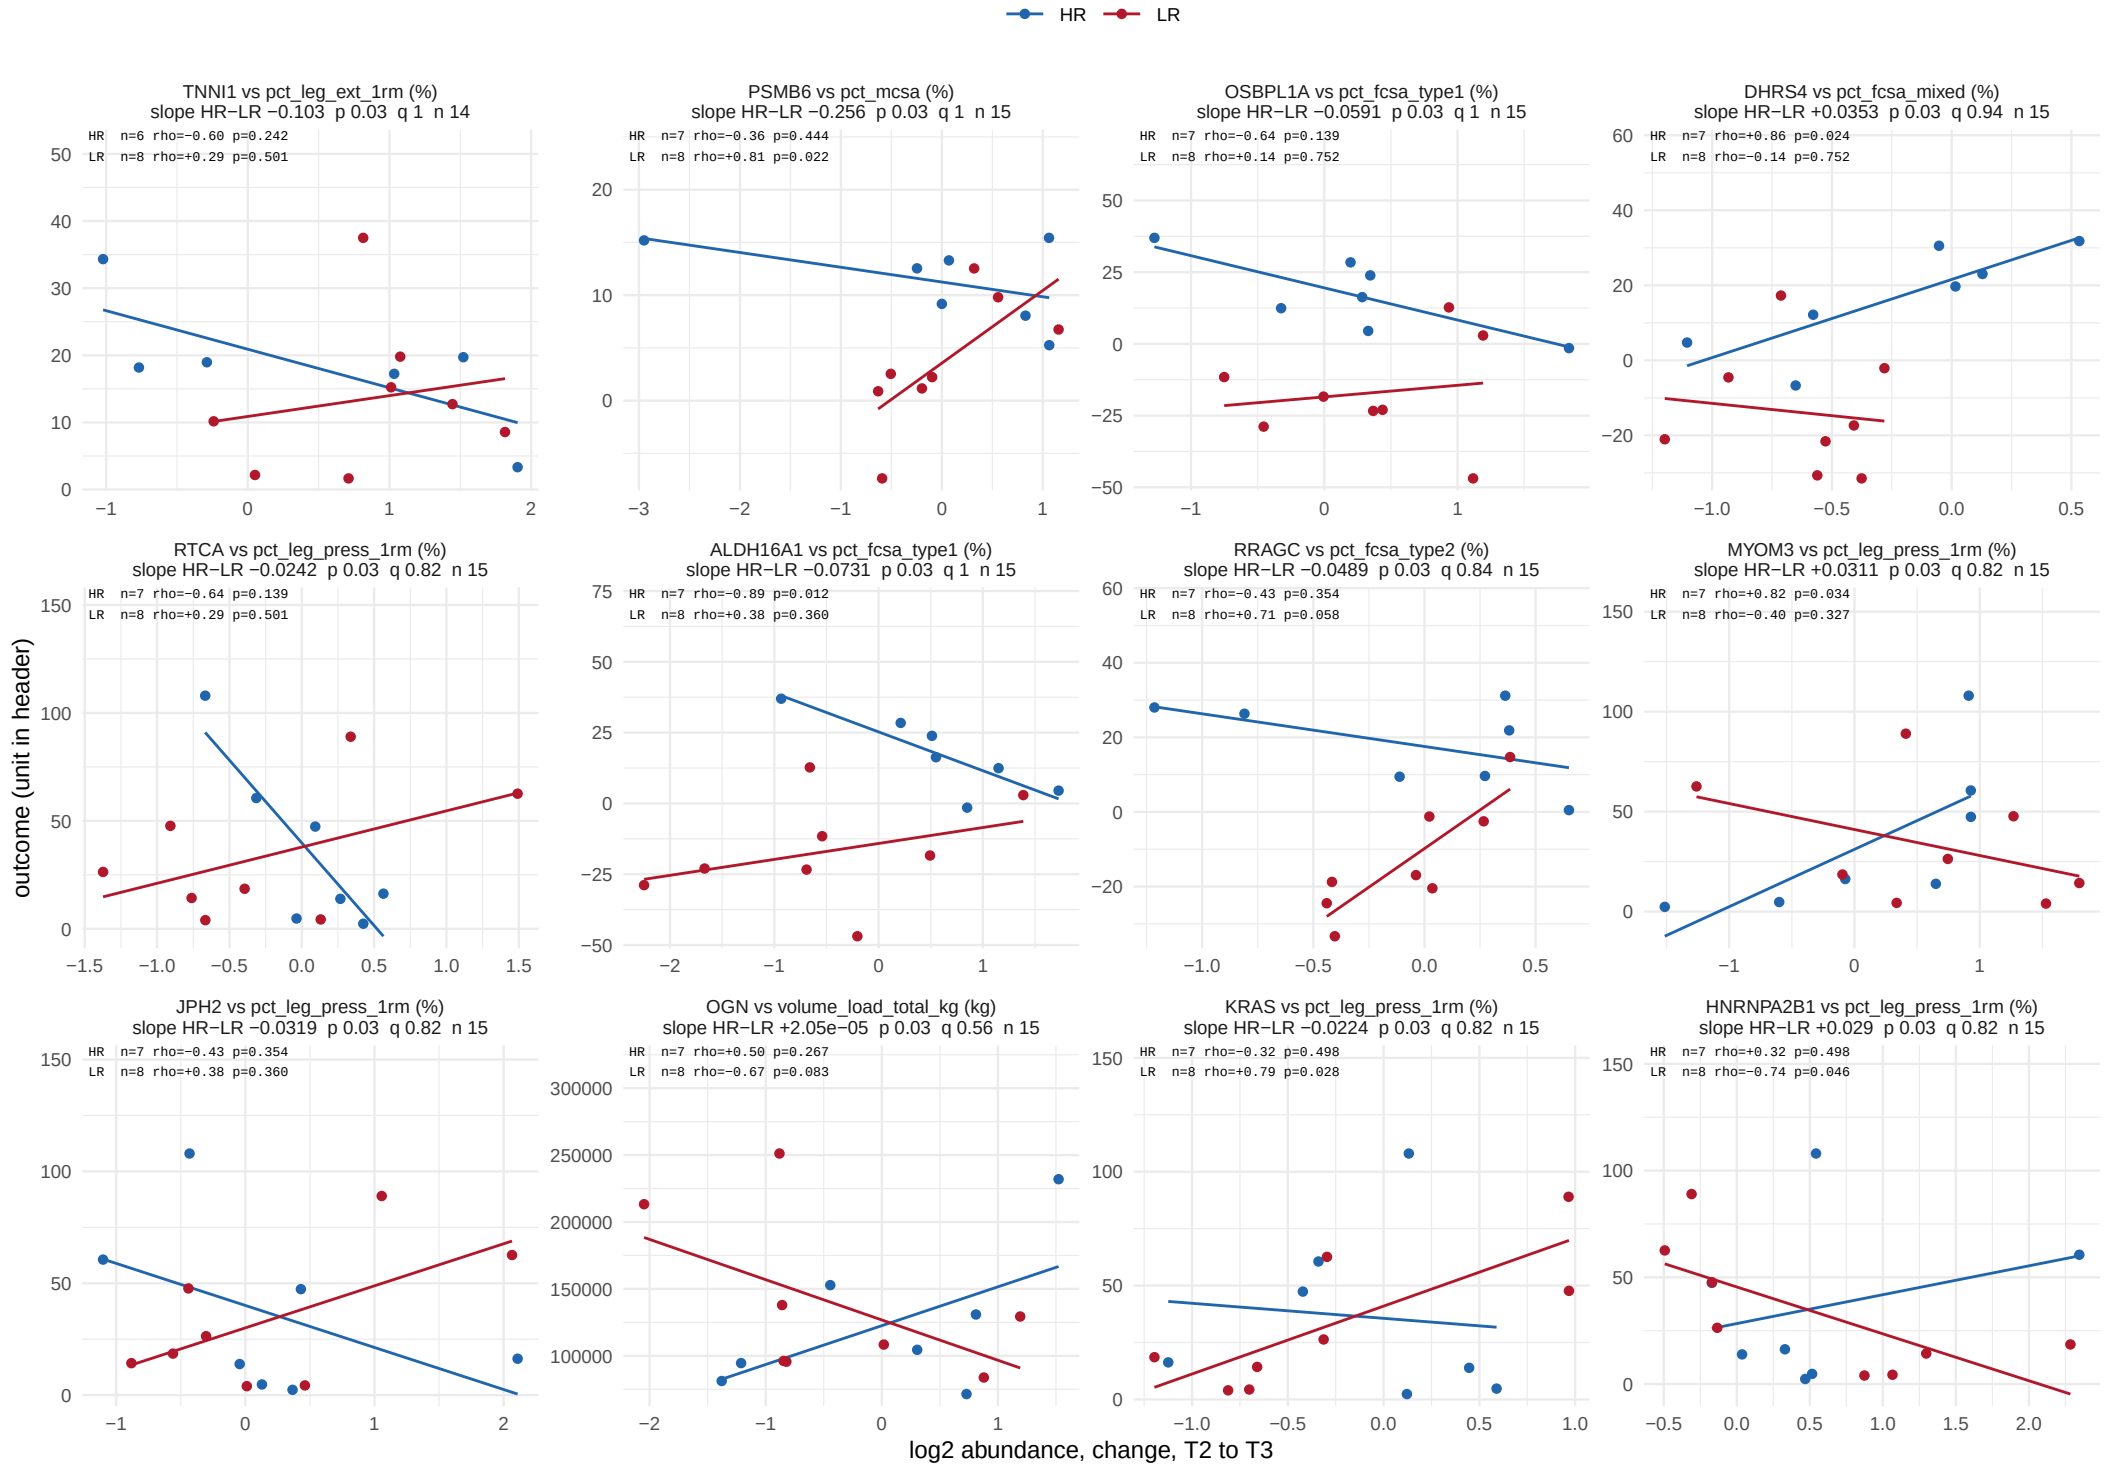

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window

645 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 32 of 54.

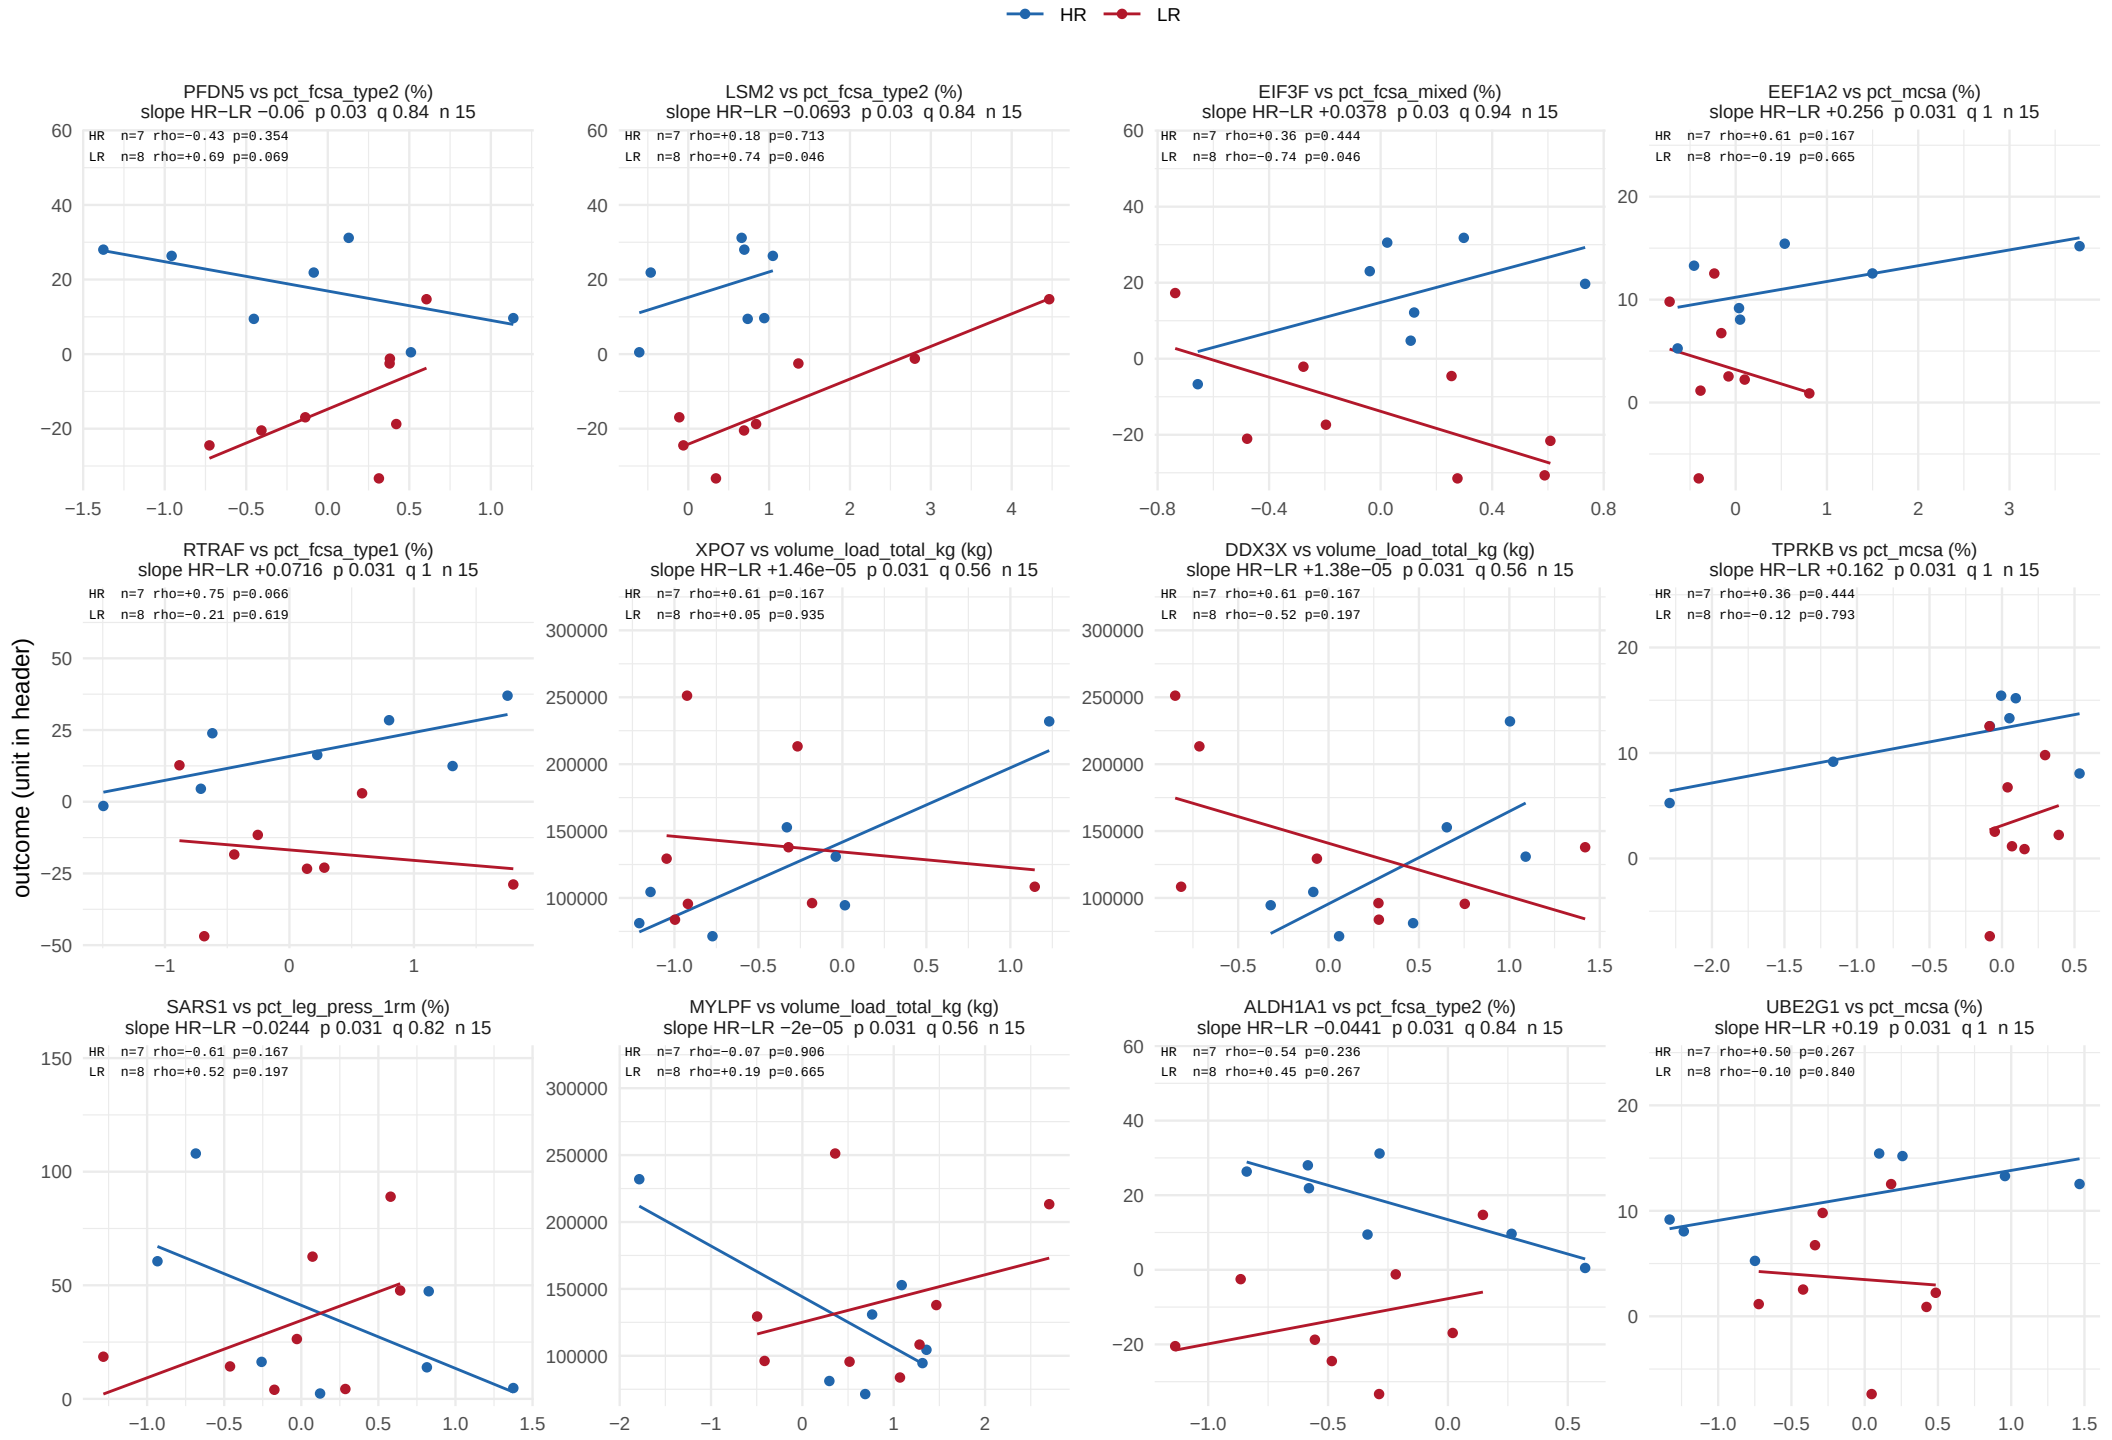

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


645 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 33 of 54.



One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


645 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 34 of 54.

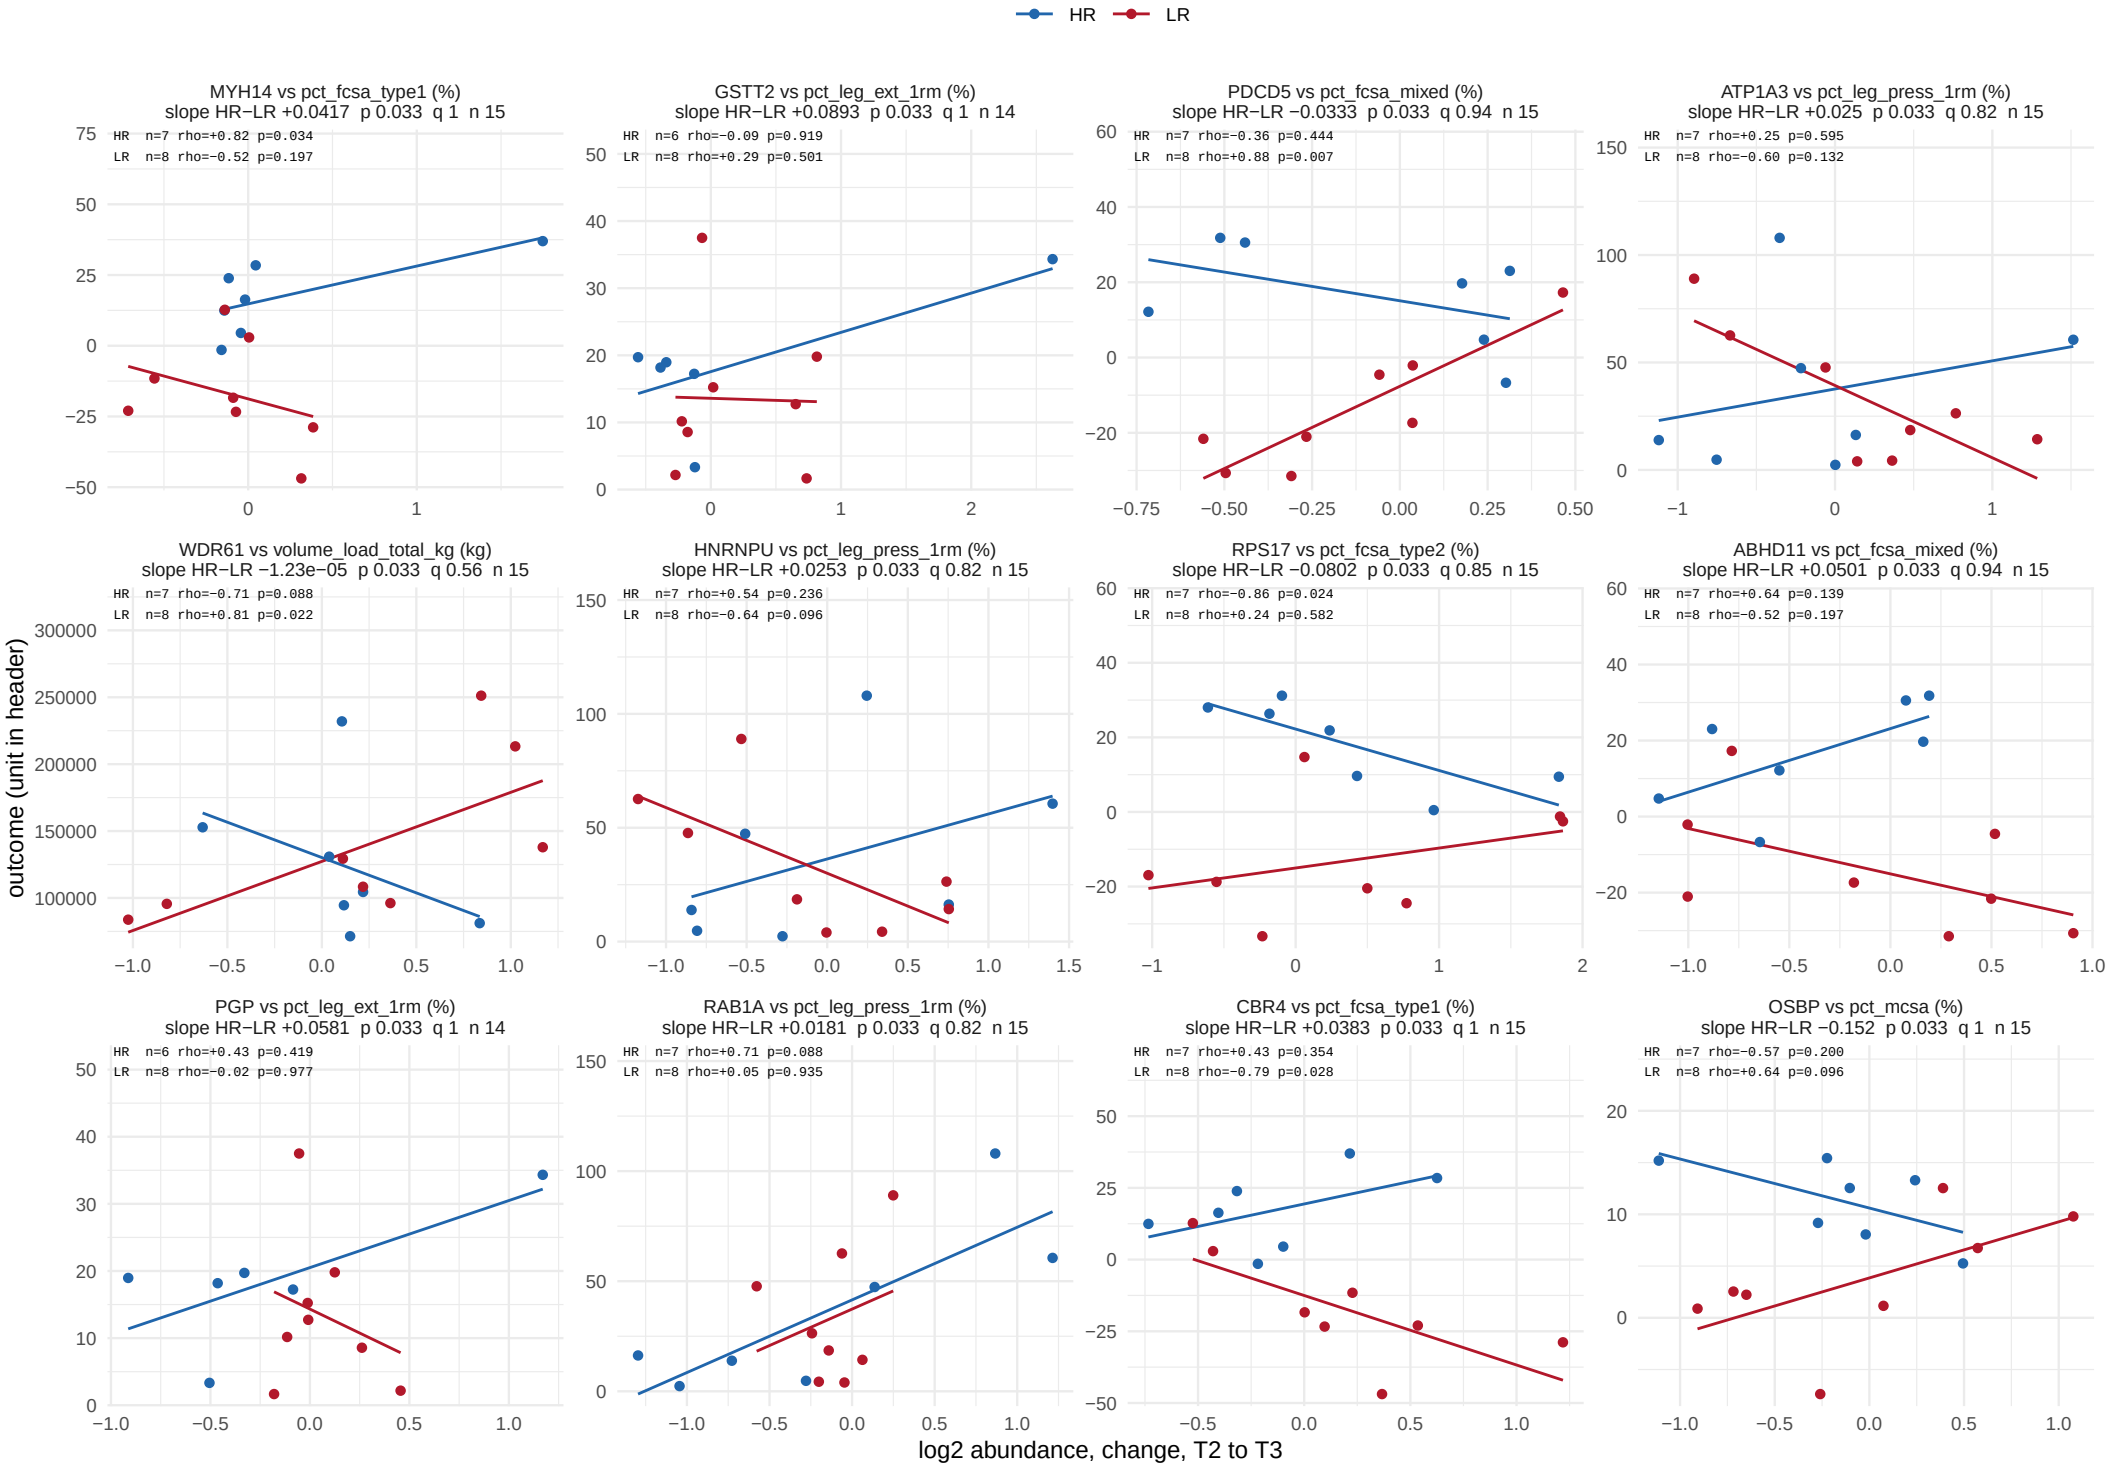

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


645 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 35 of 54.

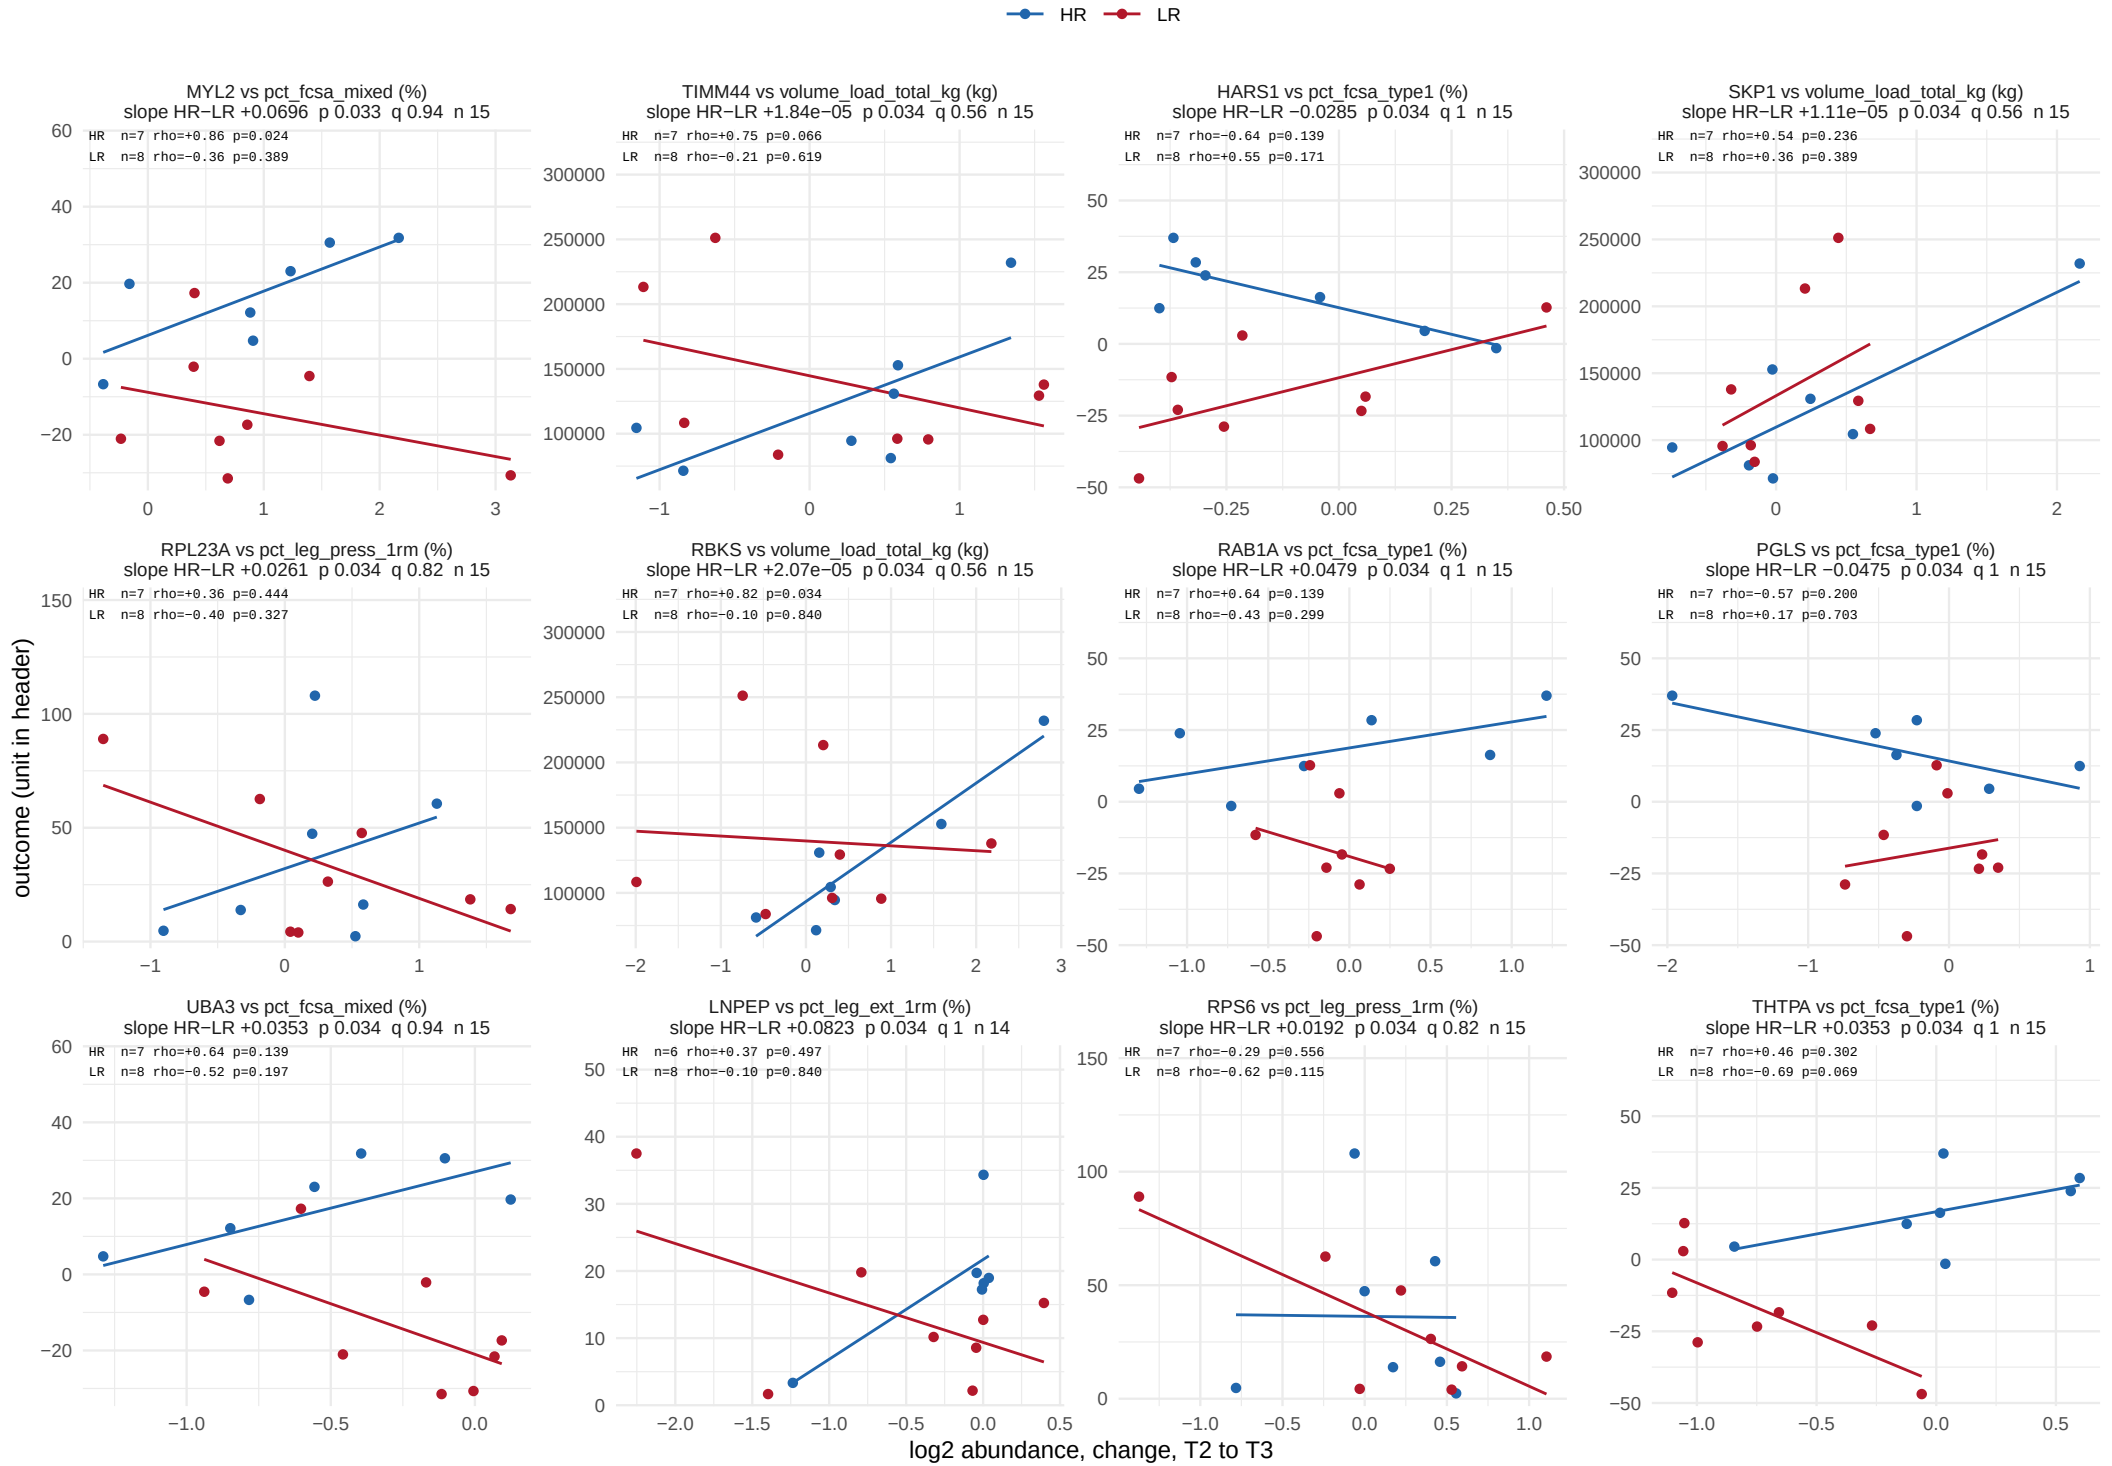

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


645 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 36 of 54.

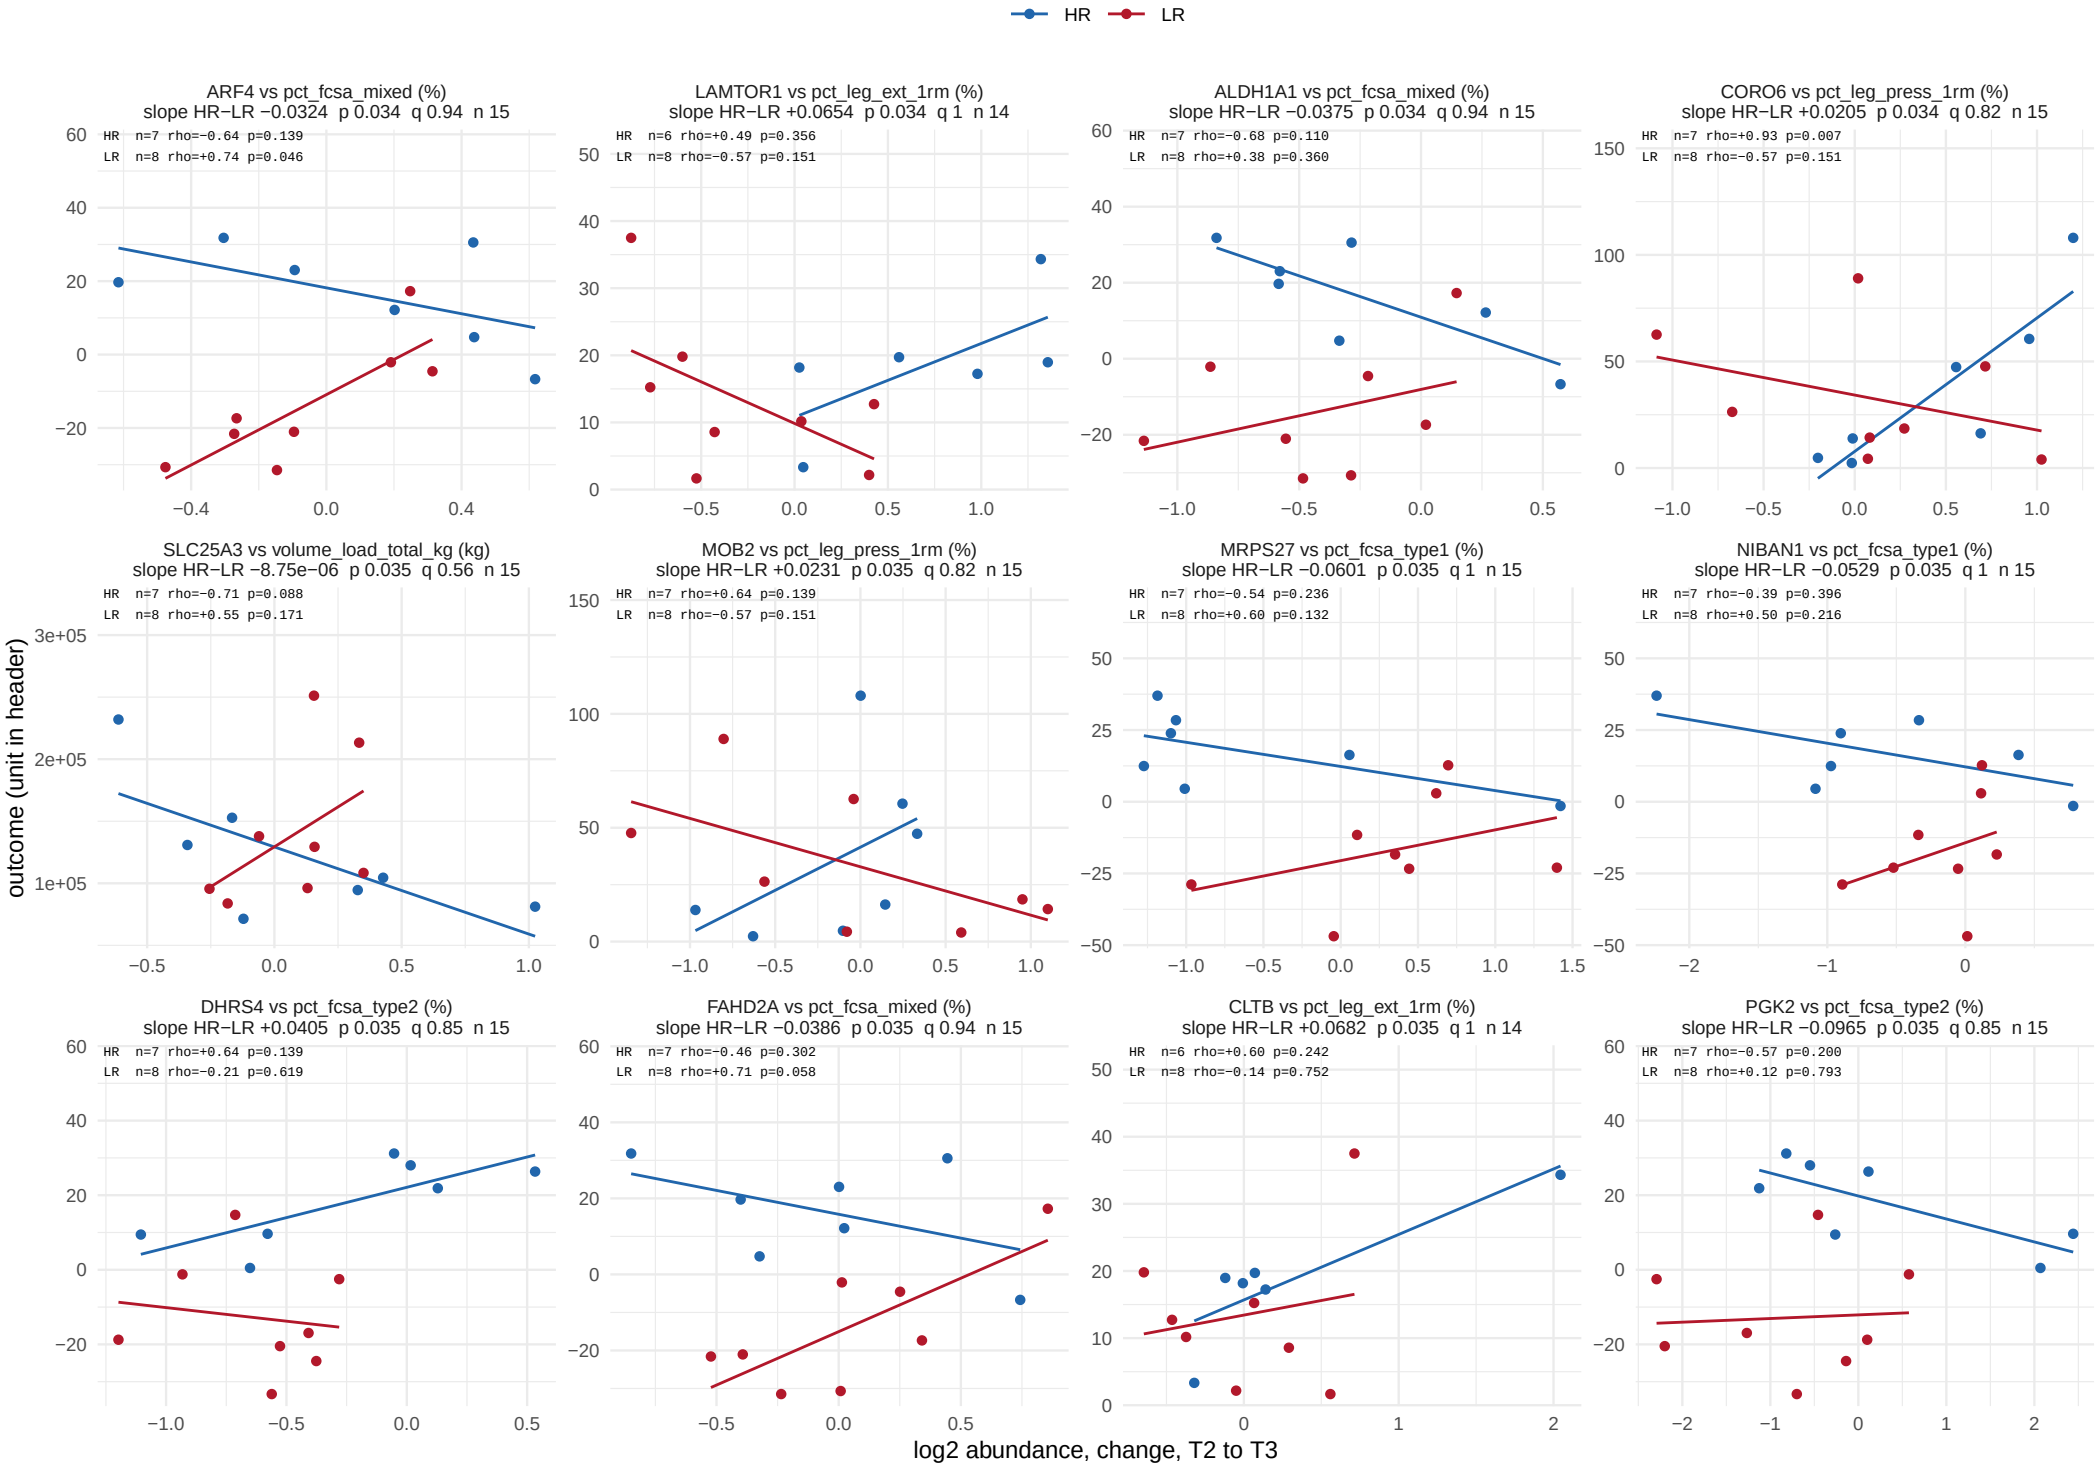

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


645 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 37 of 54.

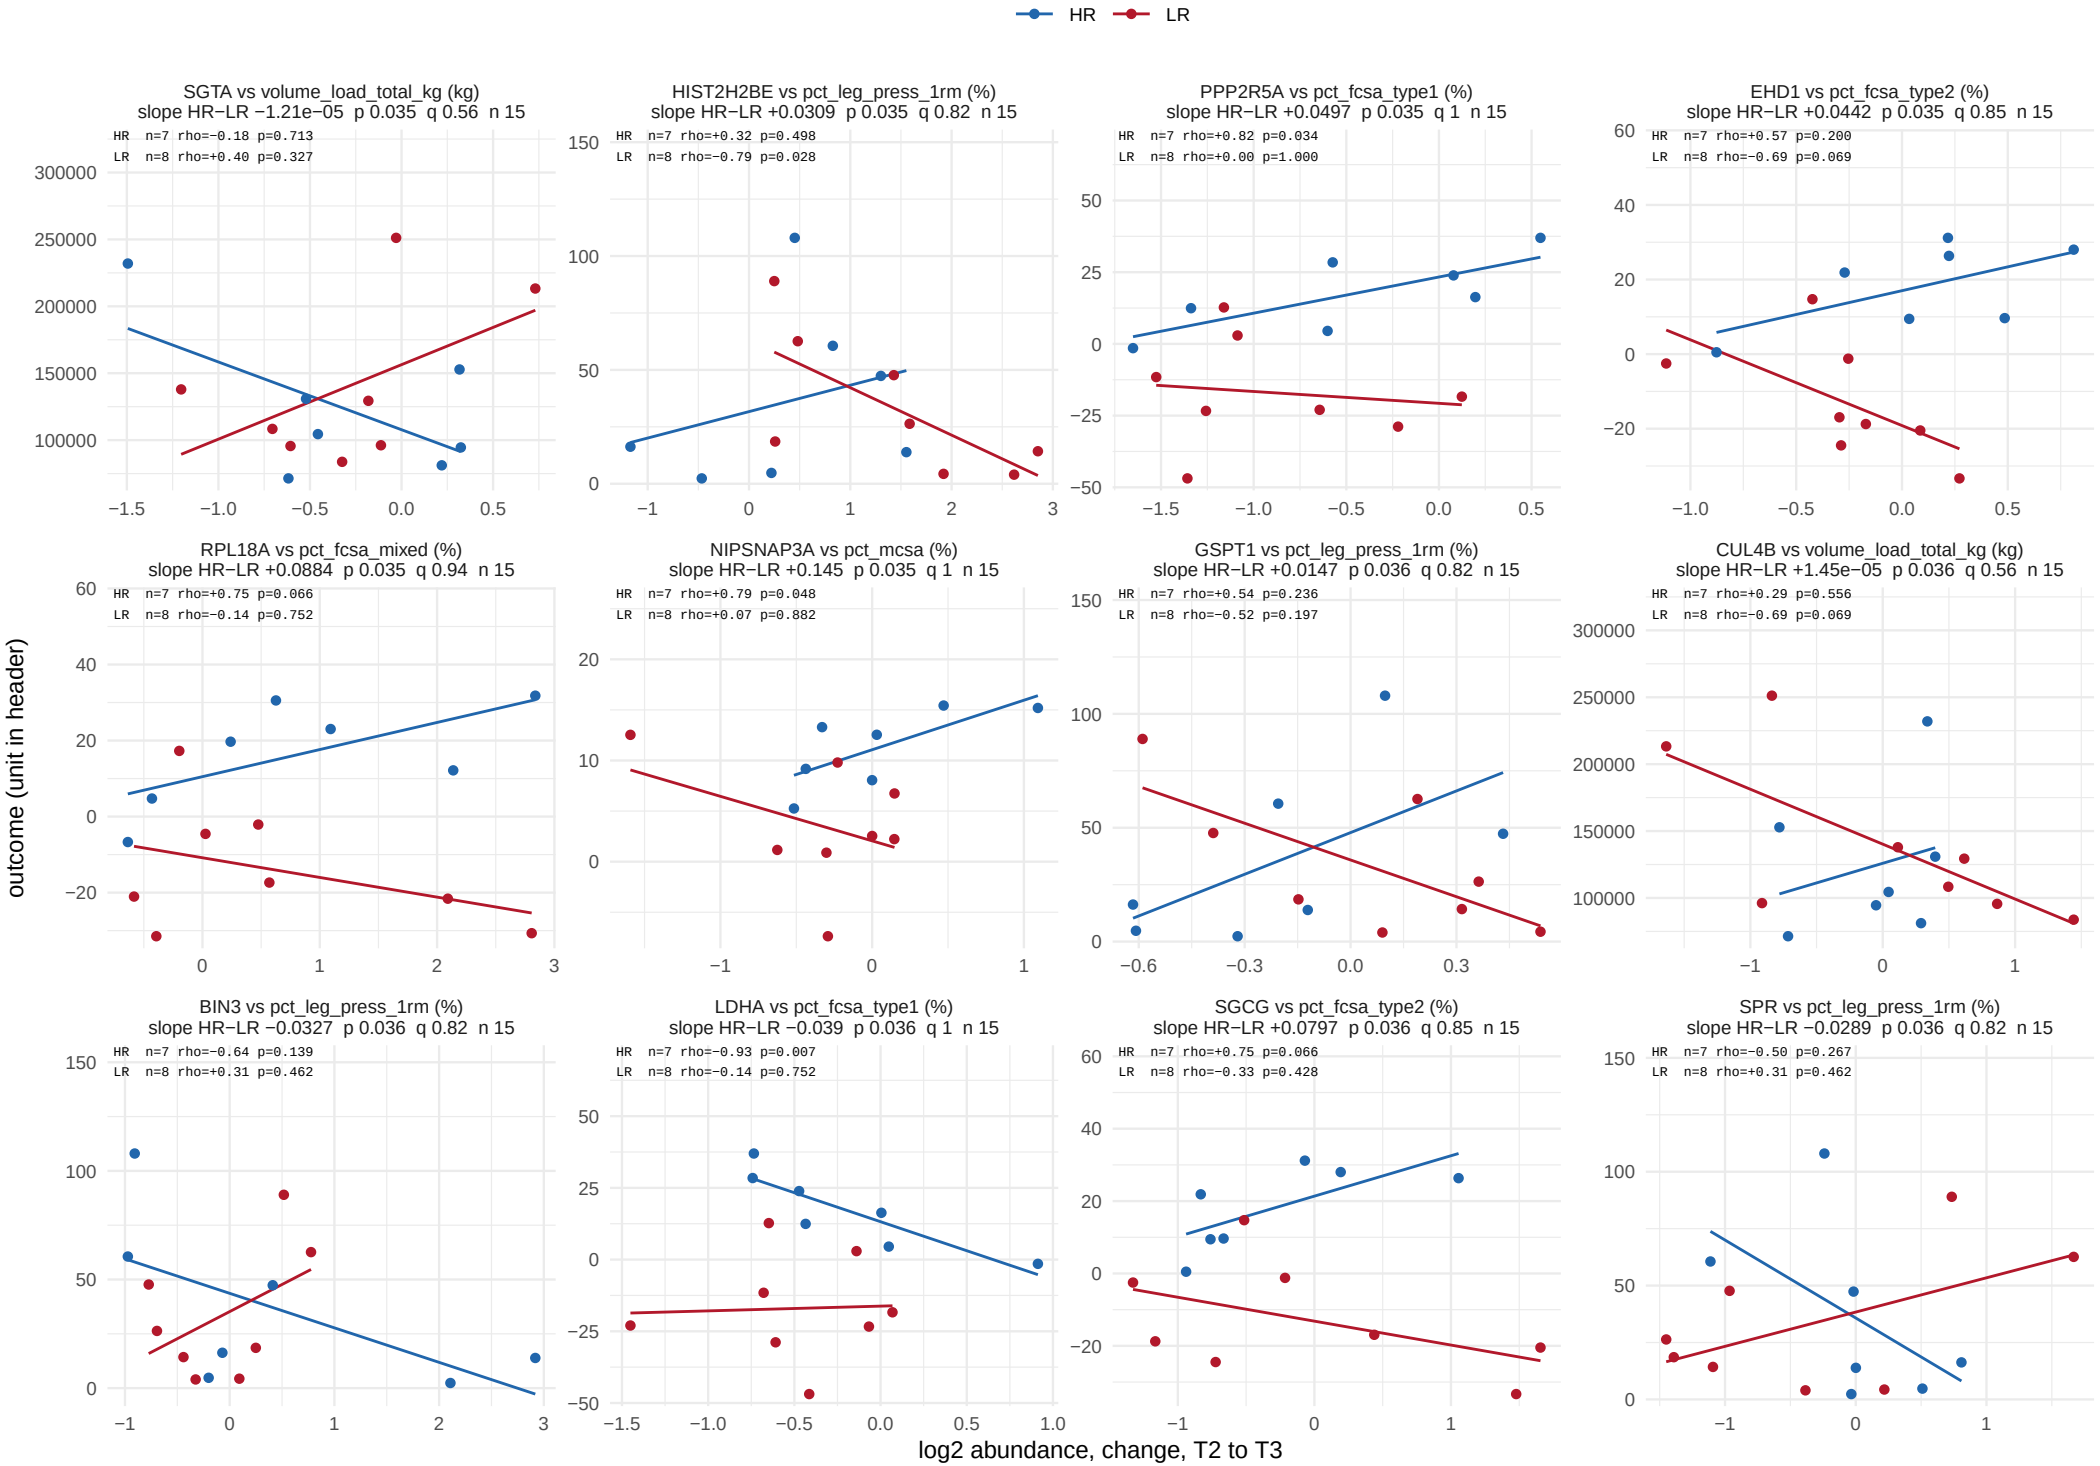

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


645 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 38 of 54.

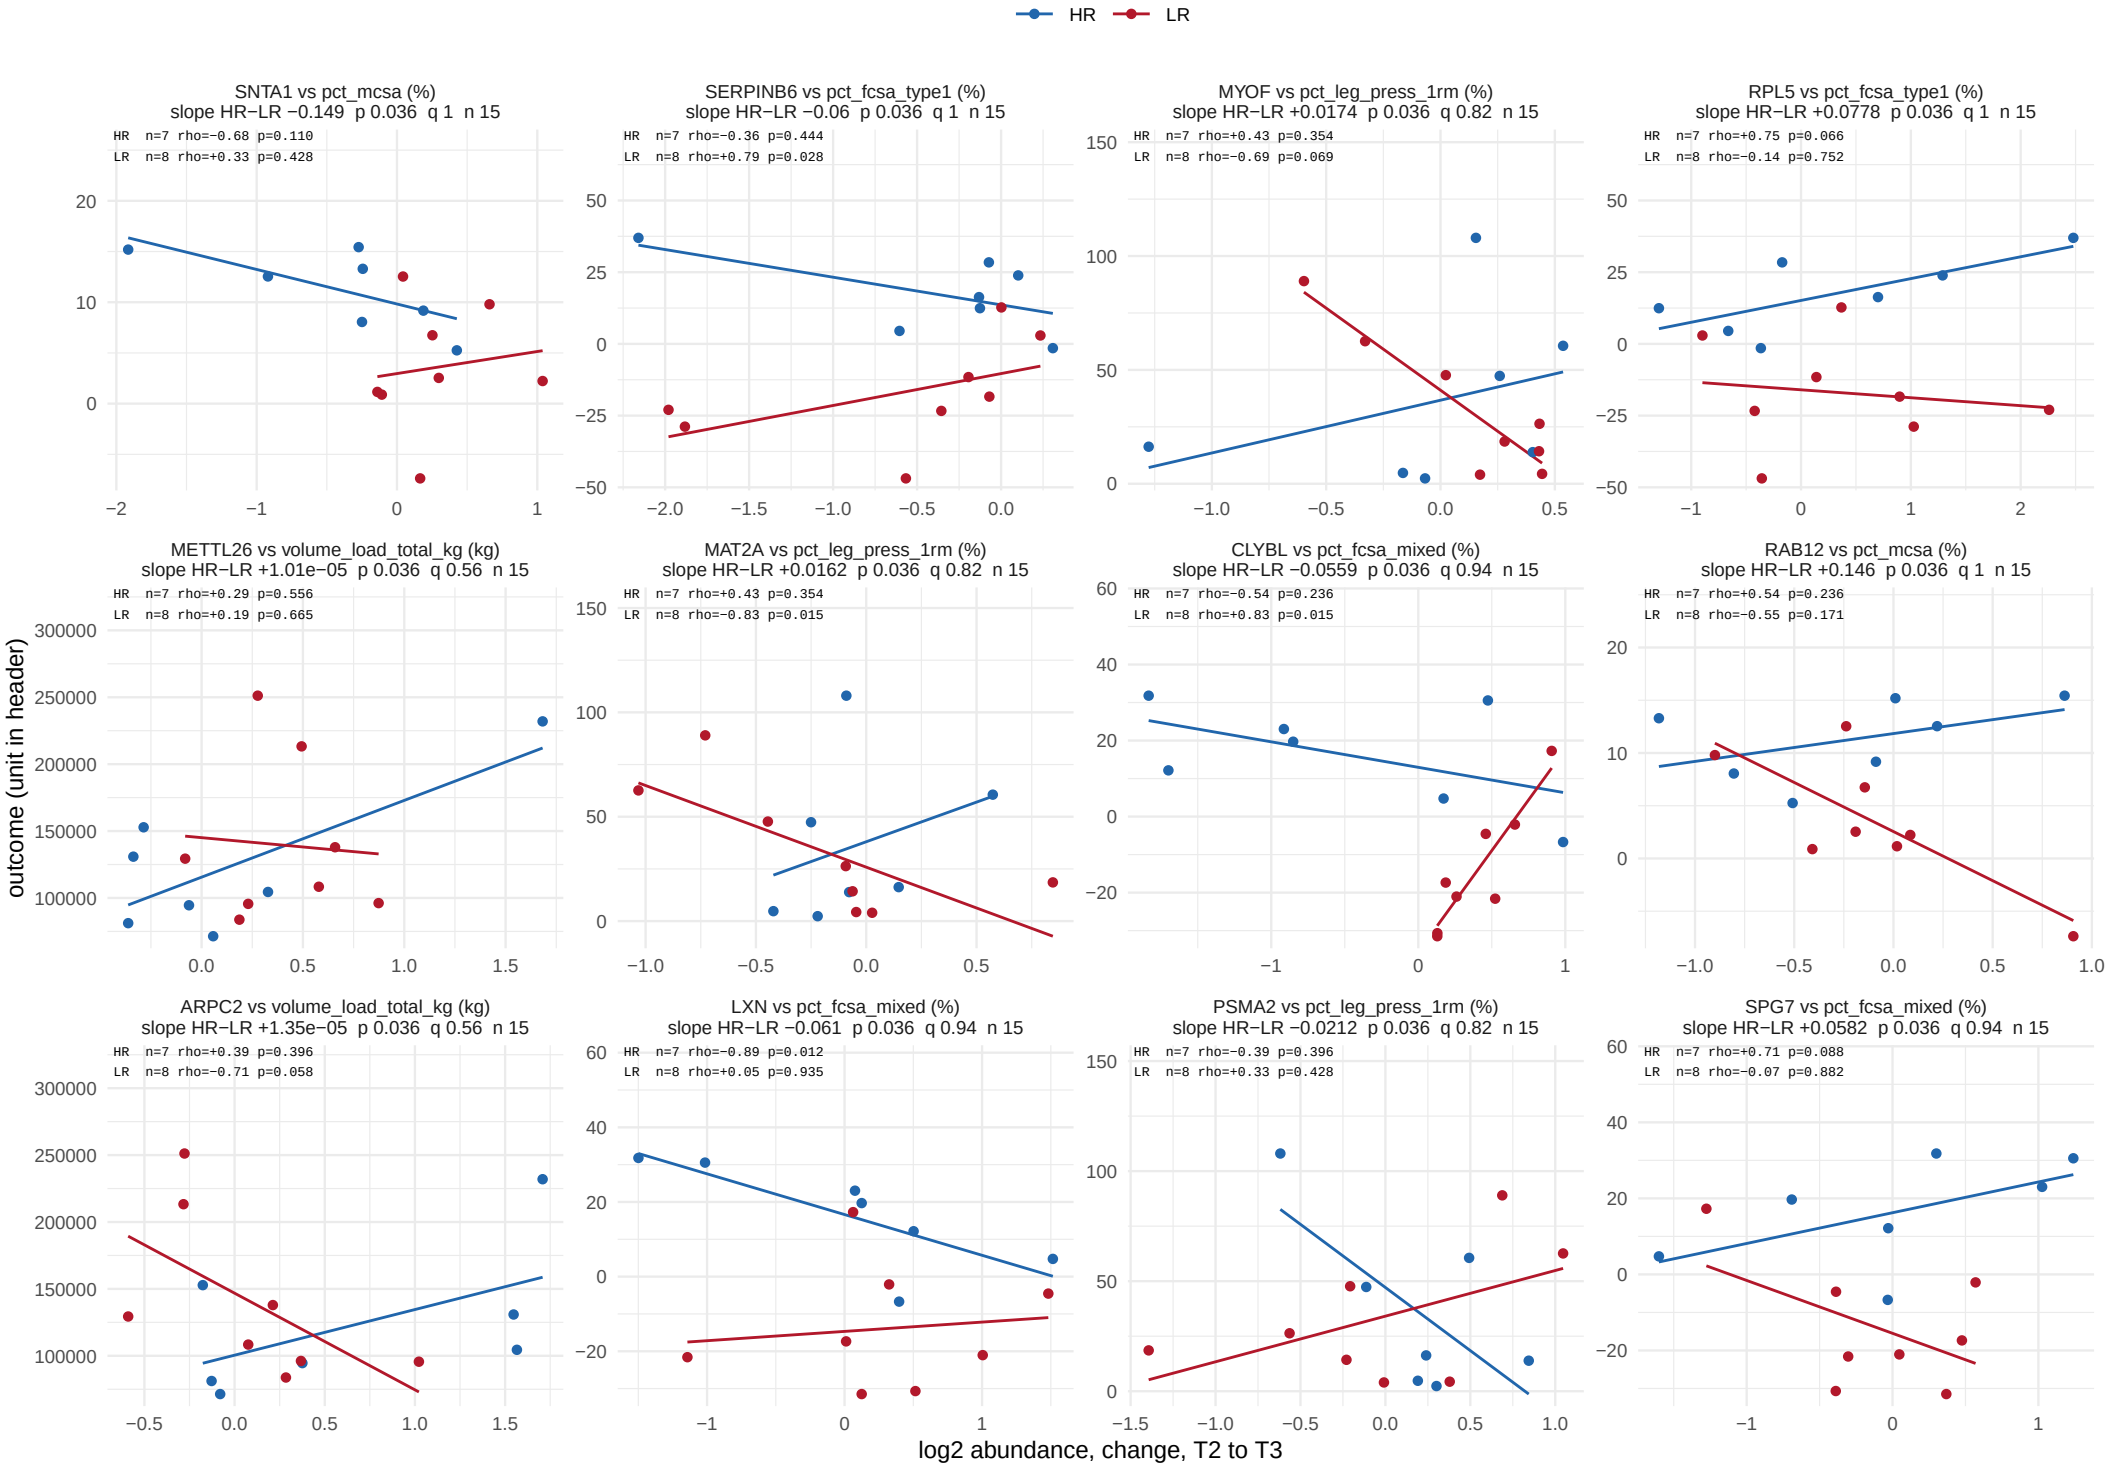

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


645 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 39 of 54.

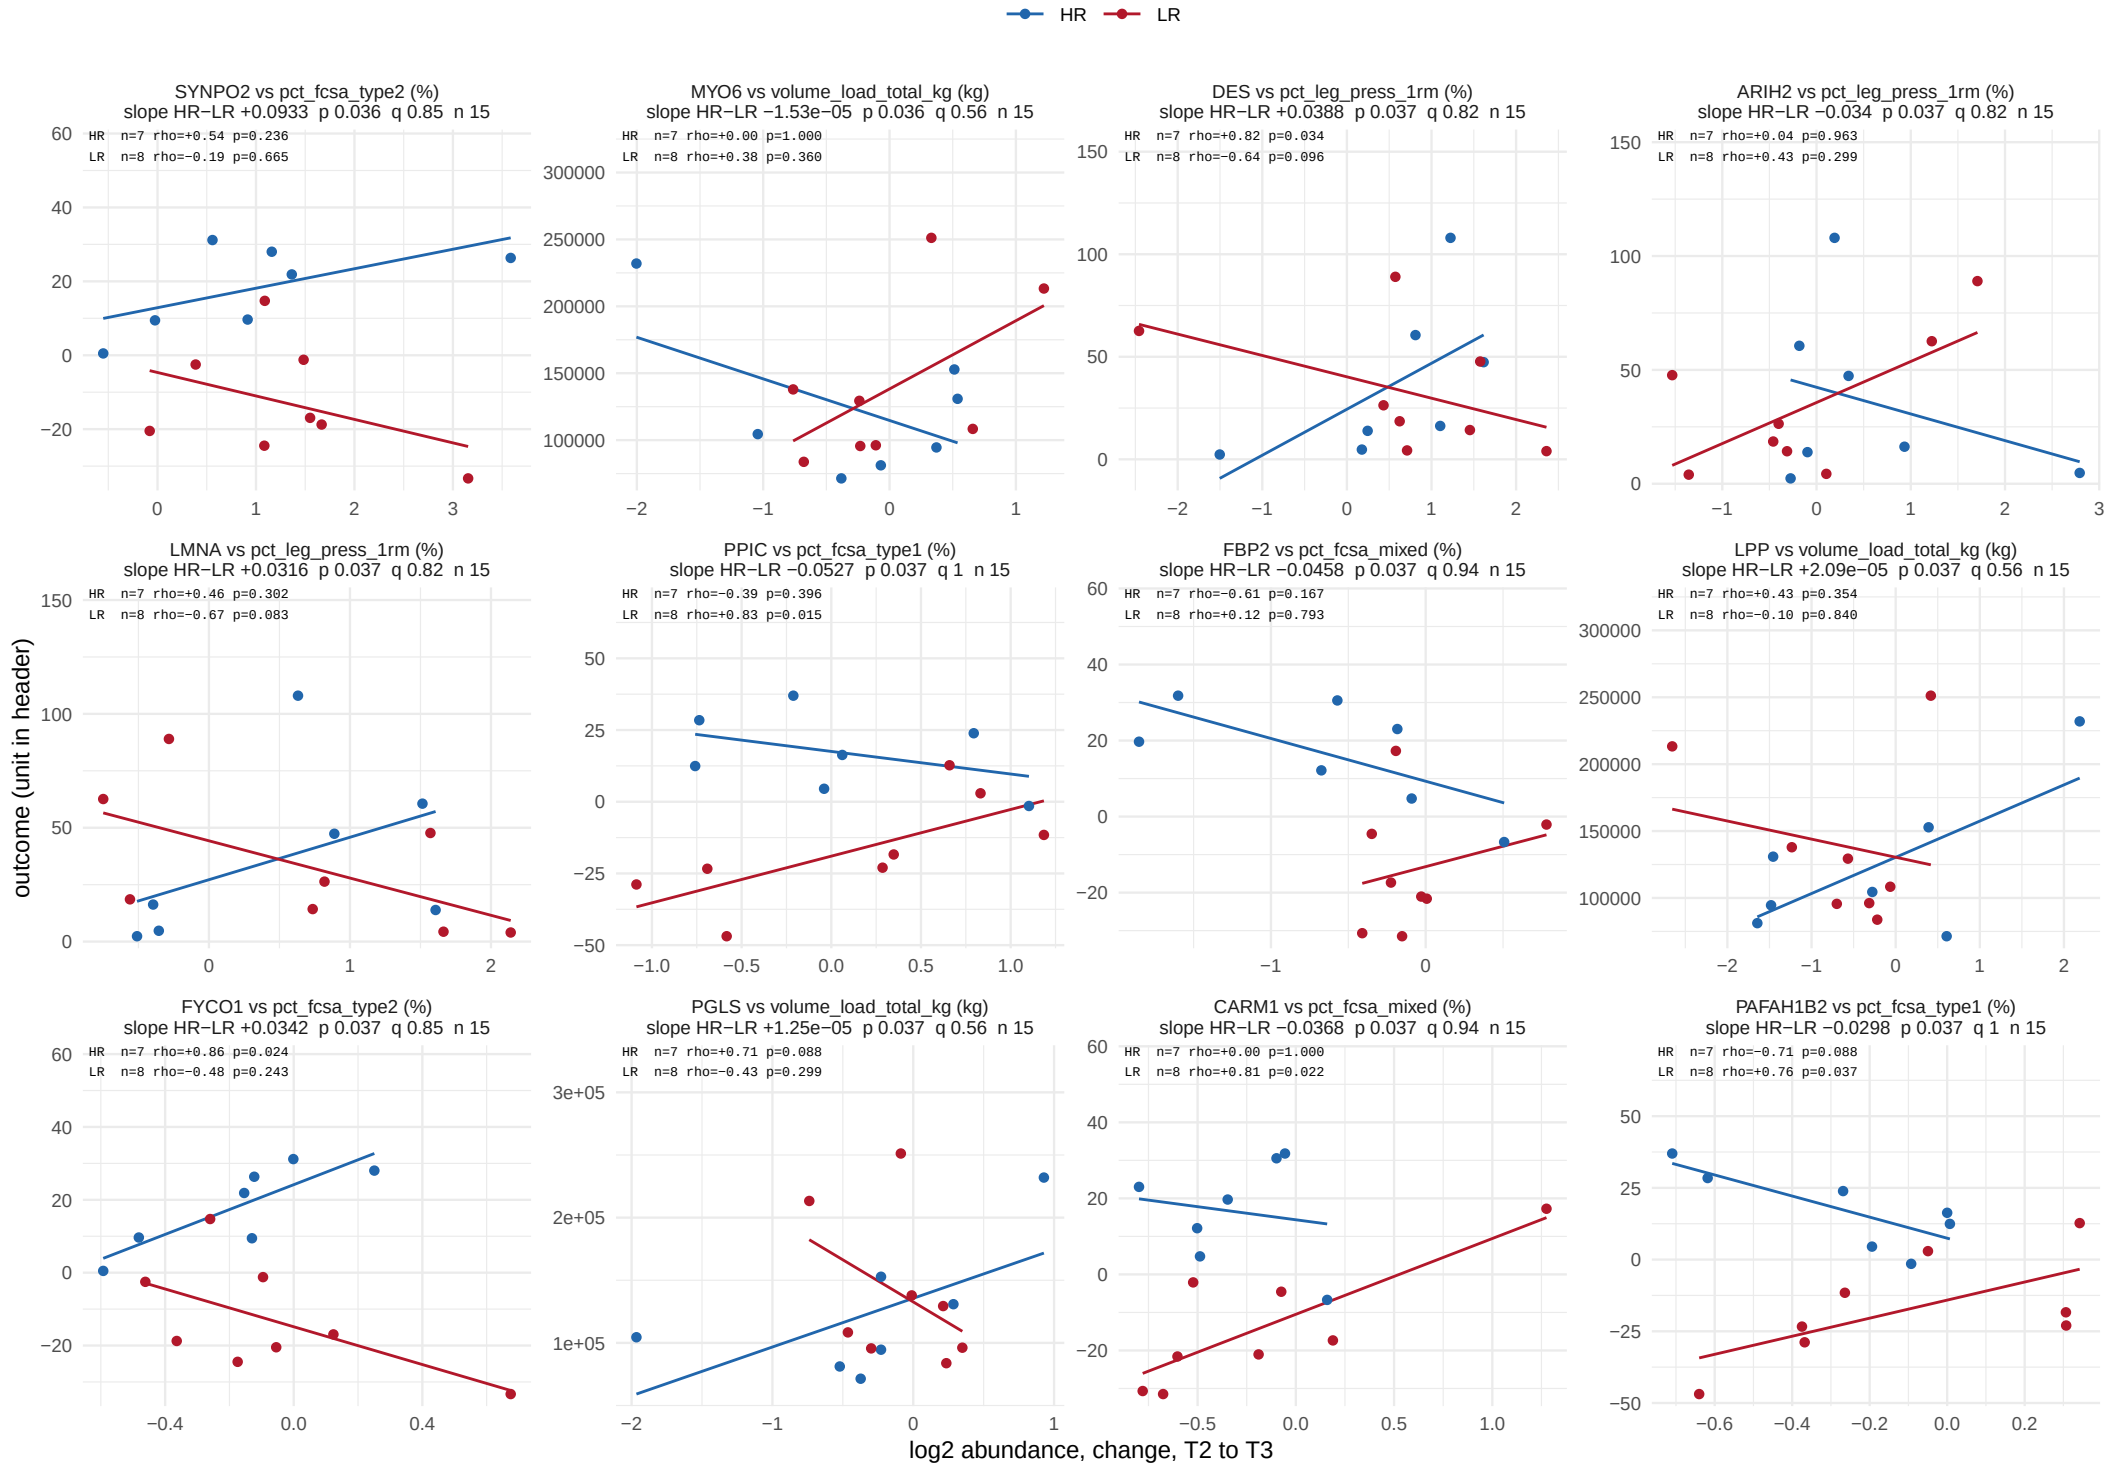

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


645 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 40 of 54.

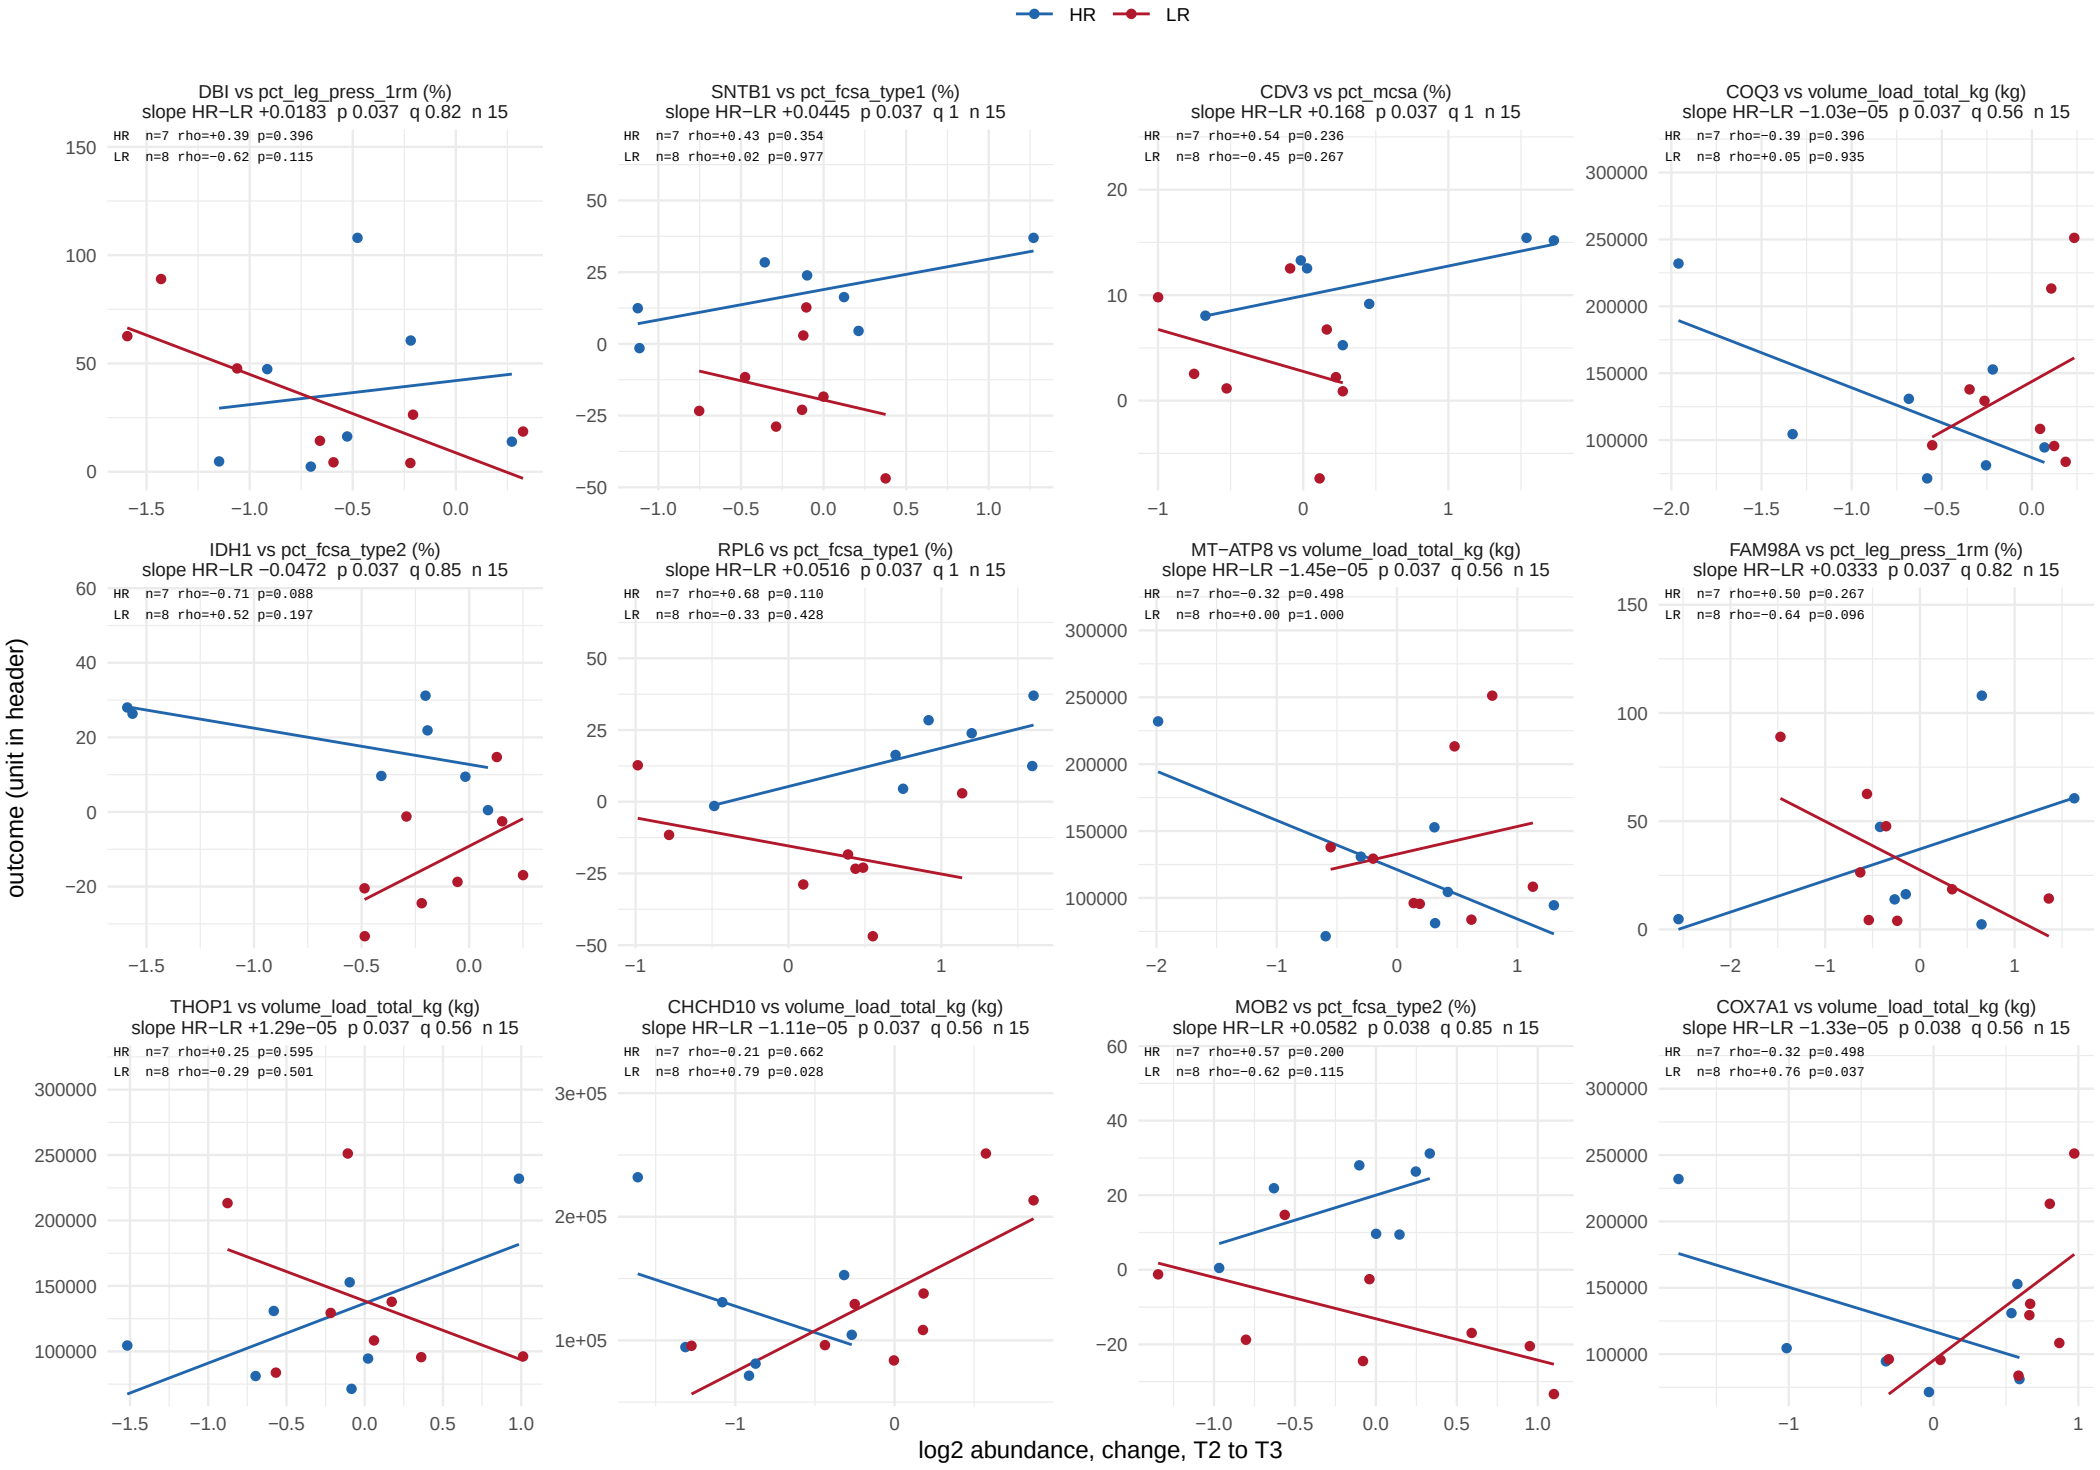

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


645 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 41 of 54.

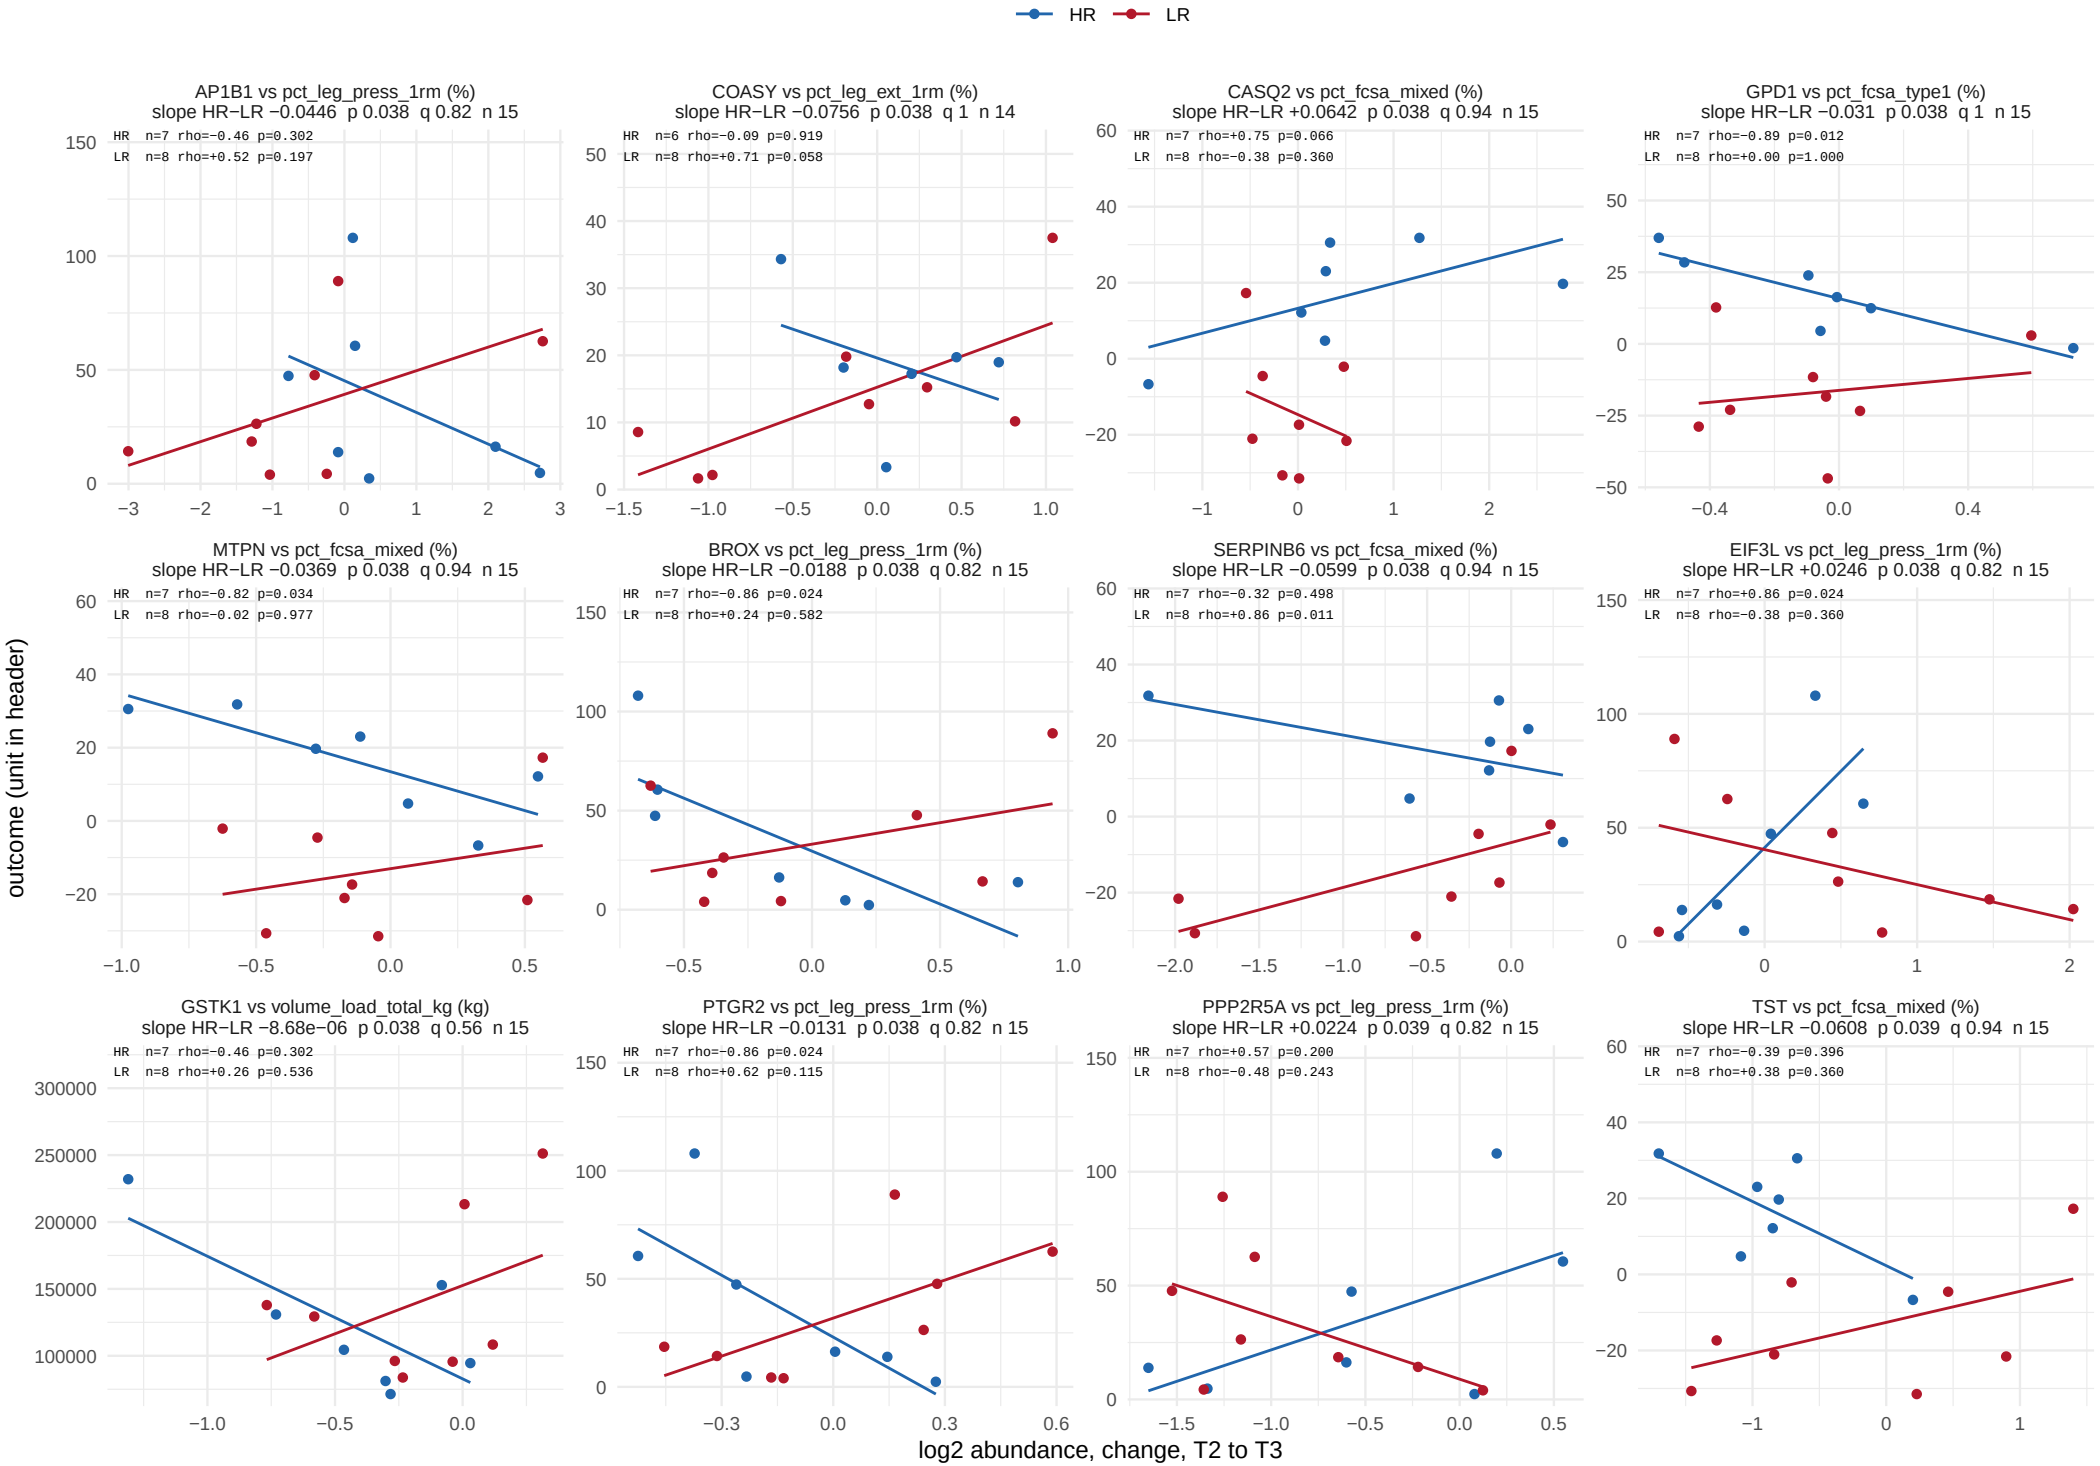

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


645 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 42 of 54.

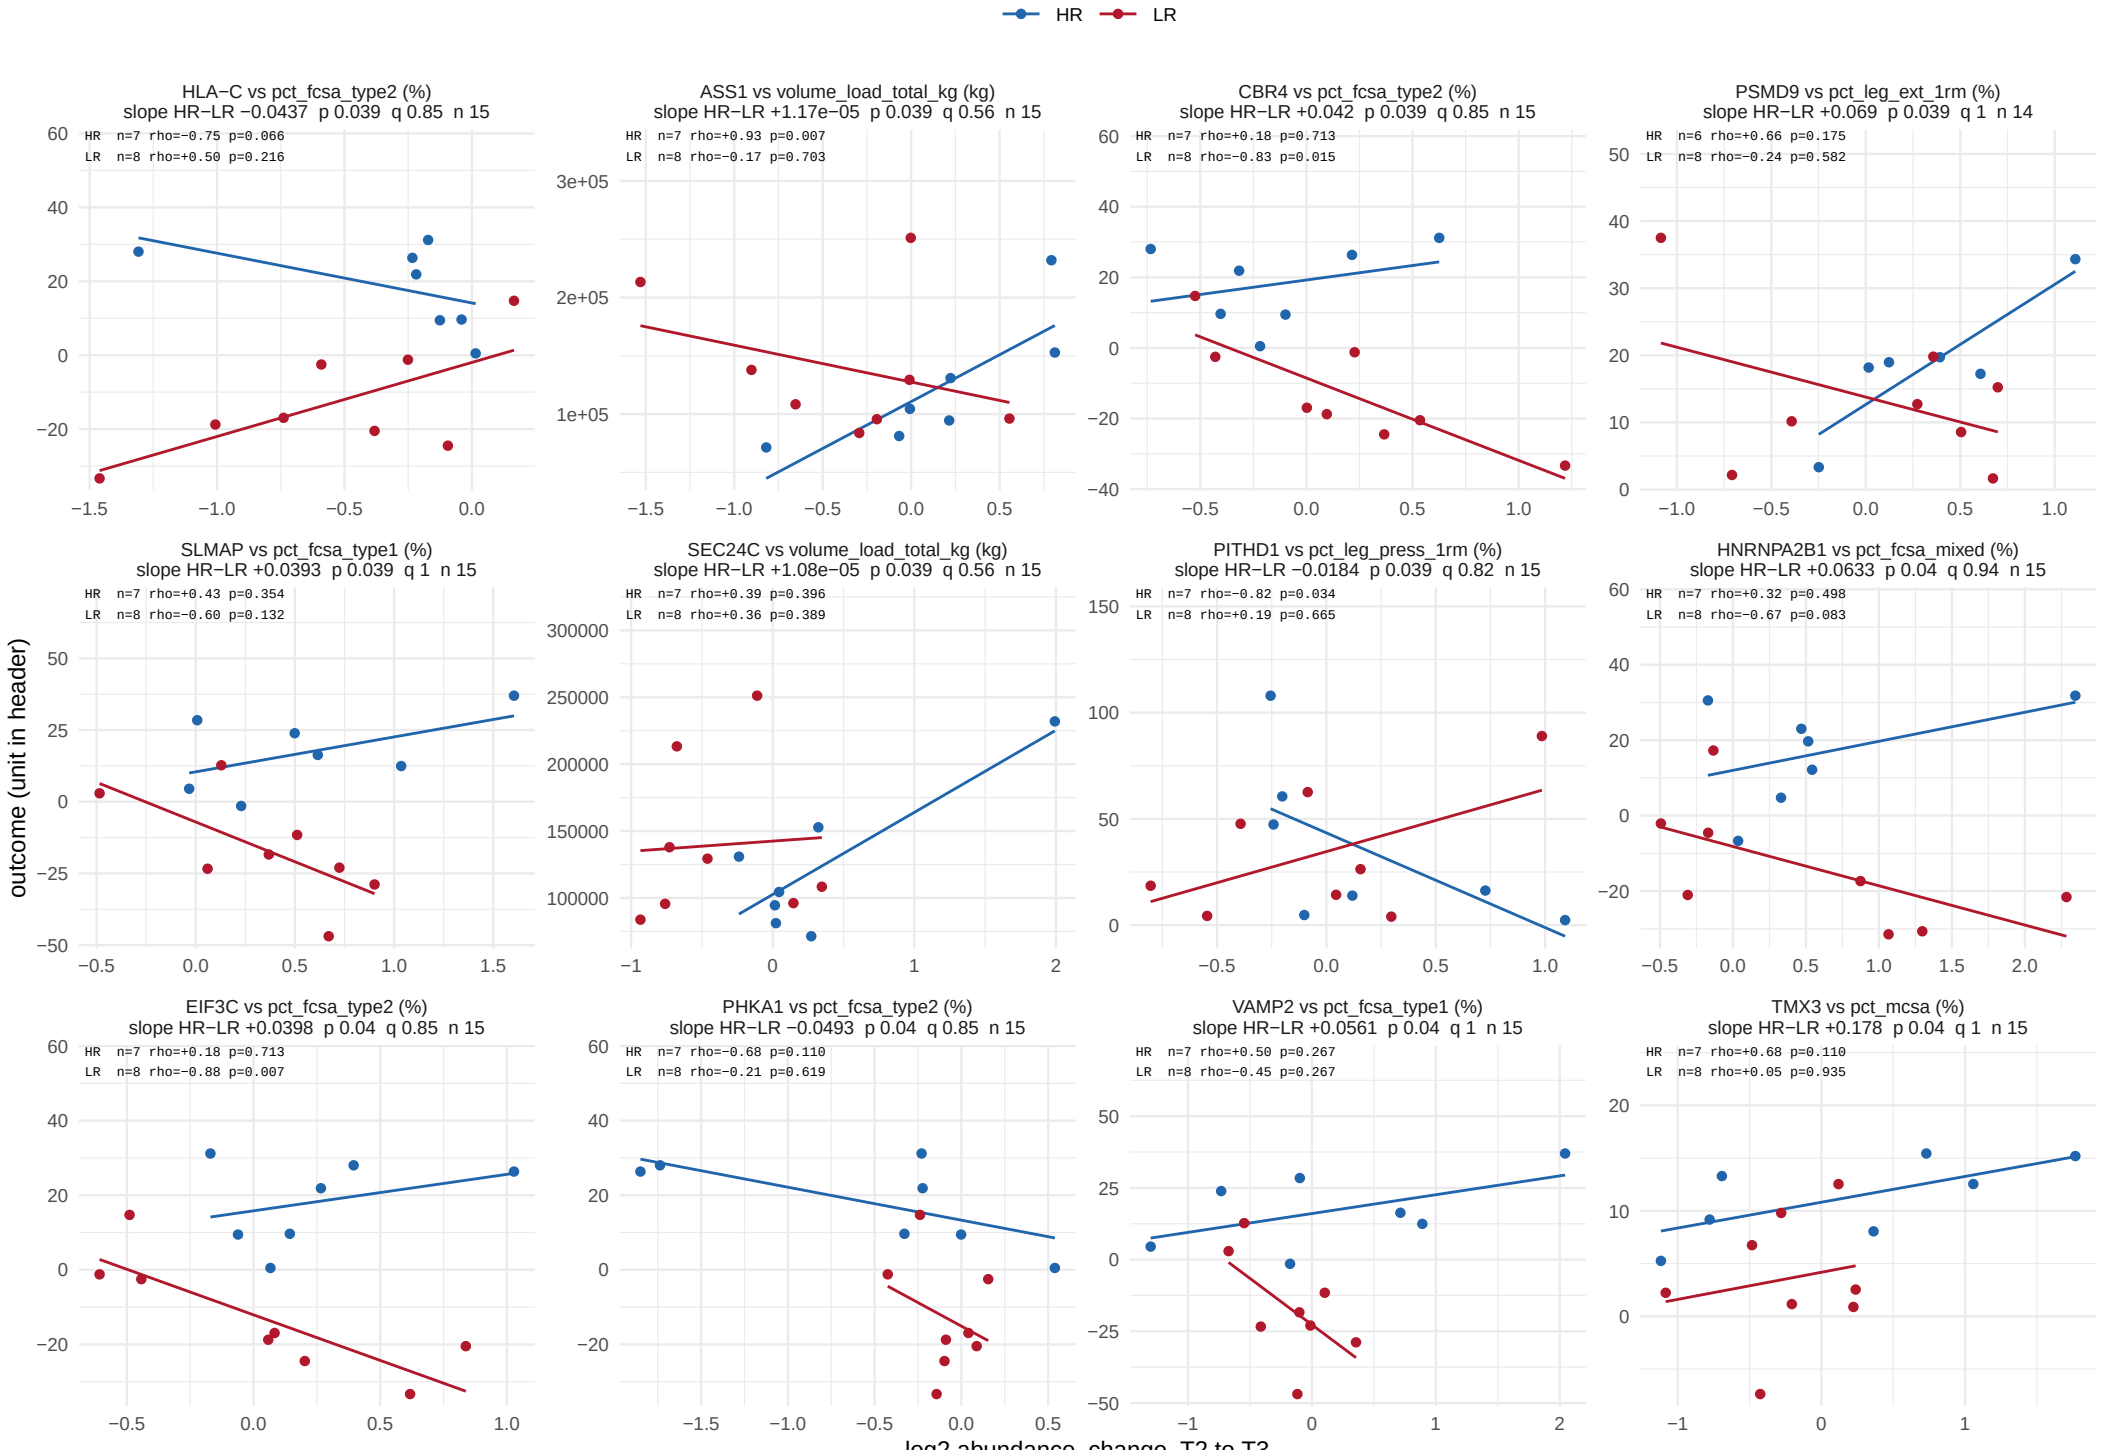

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


645 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 43 of 54.

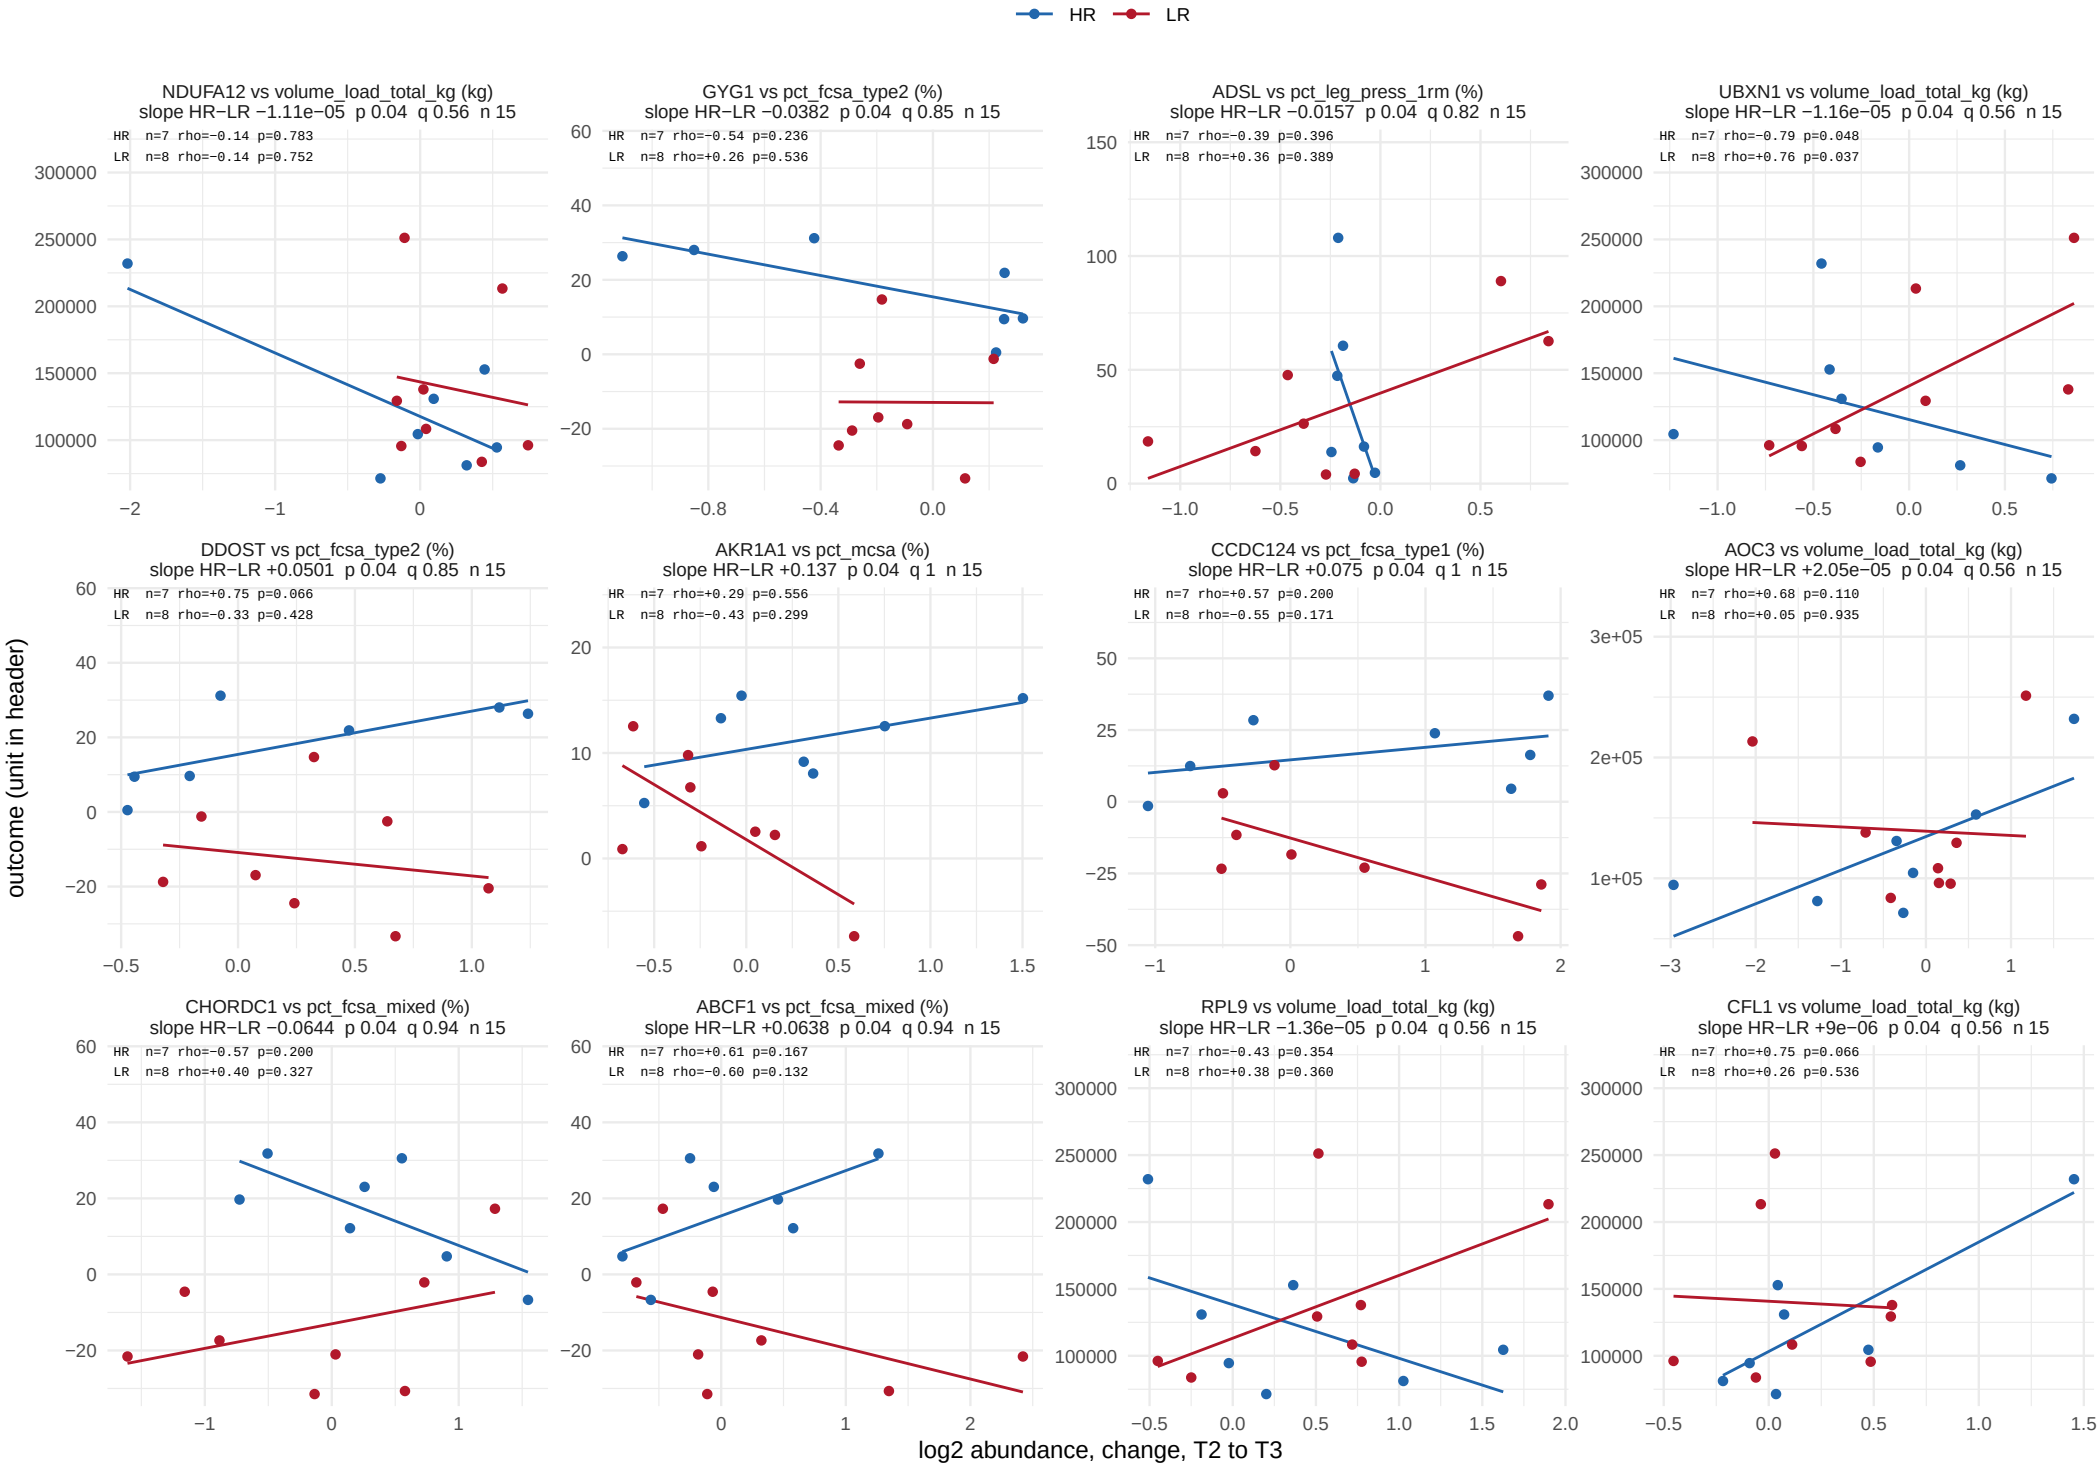

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


645 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 44 of 54.

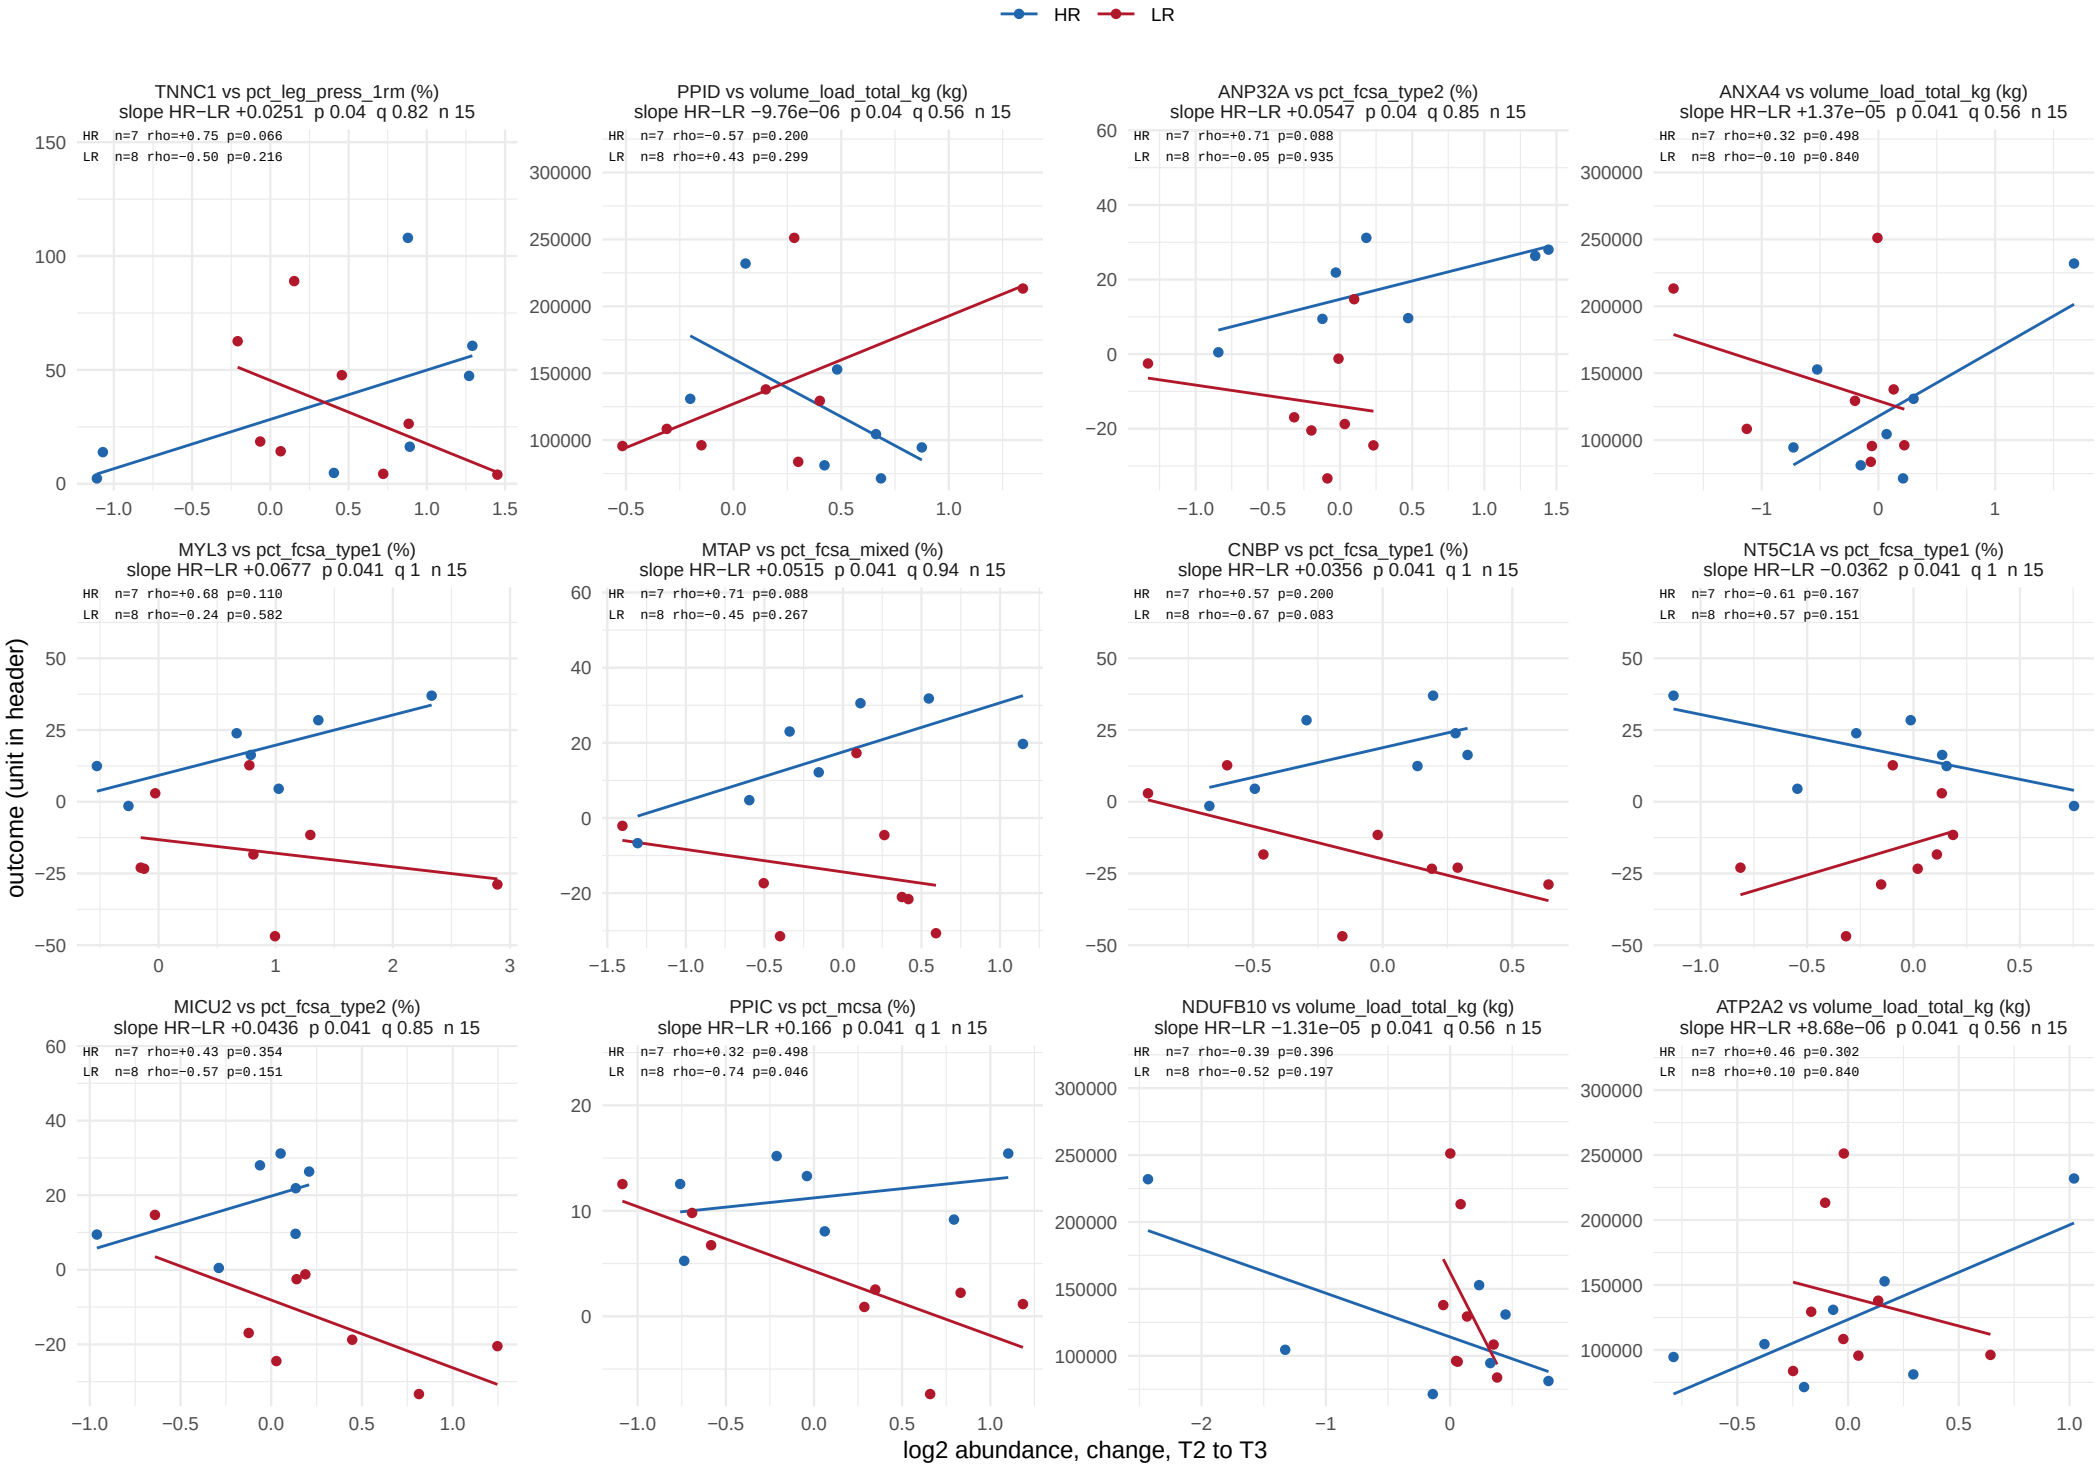

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


645 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 45 of 54.

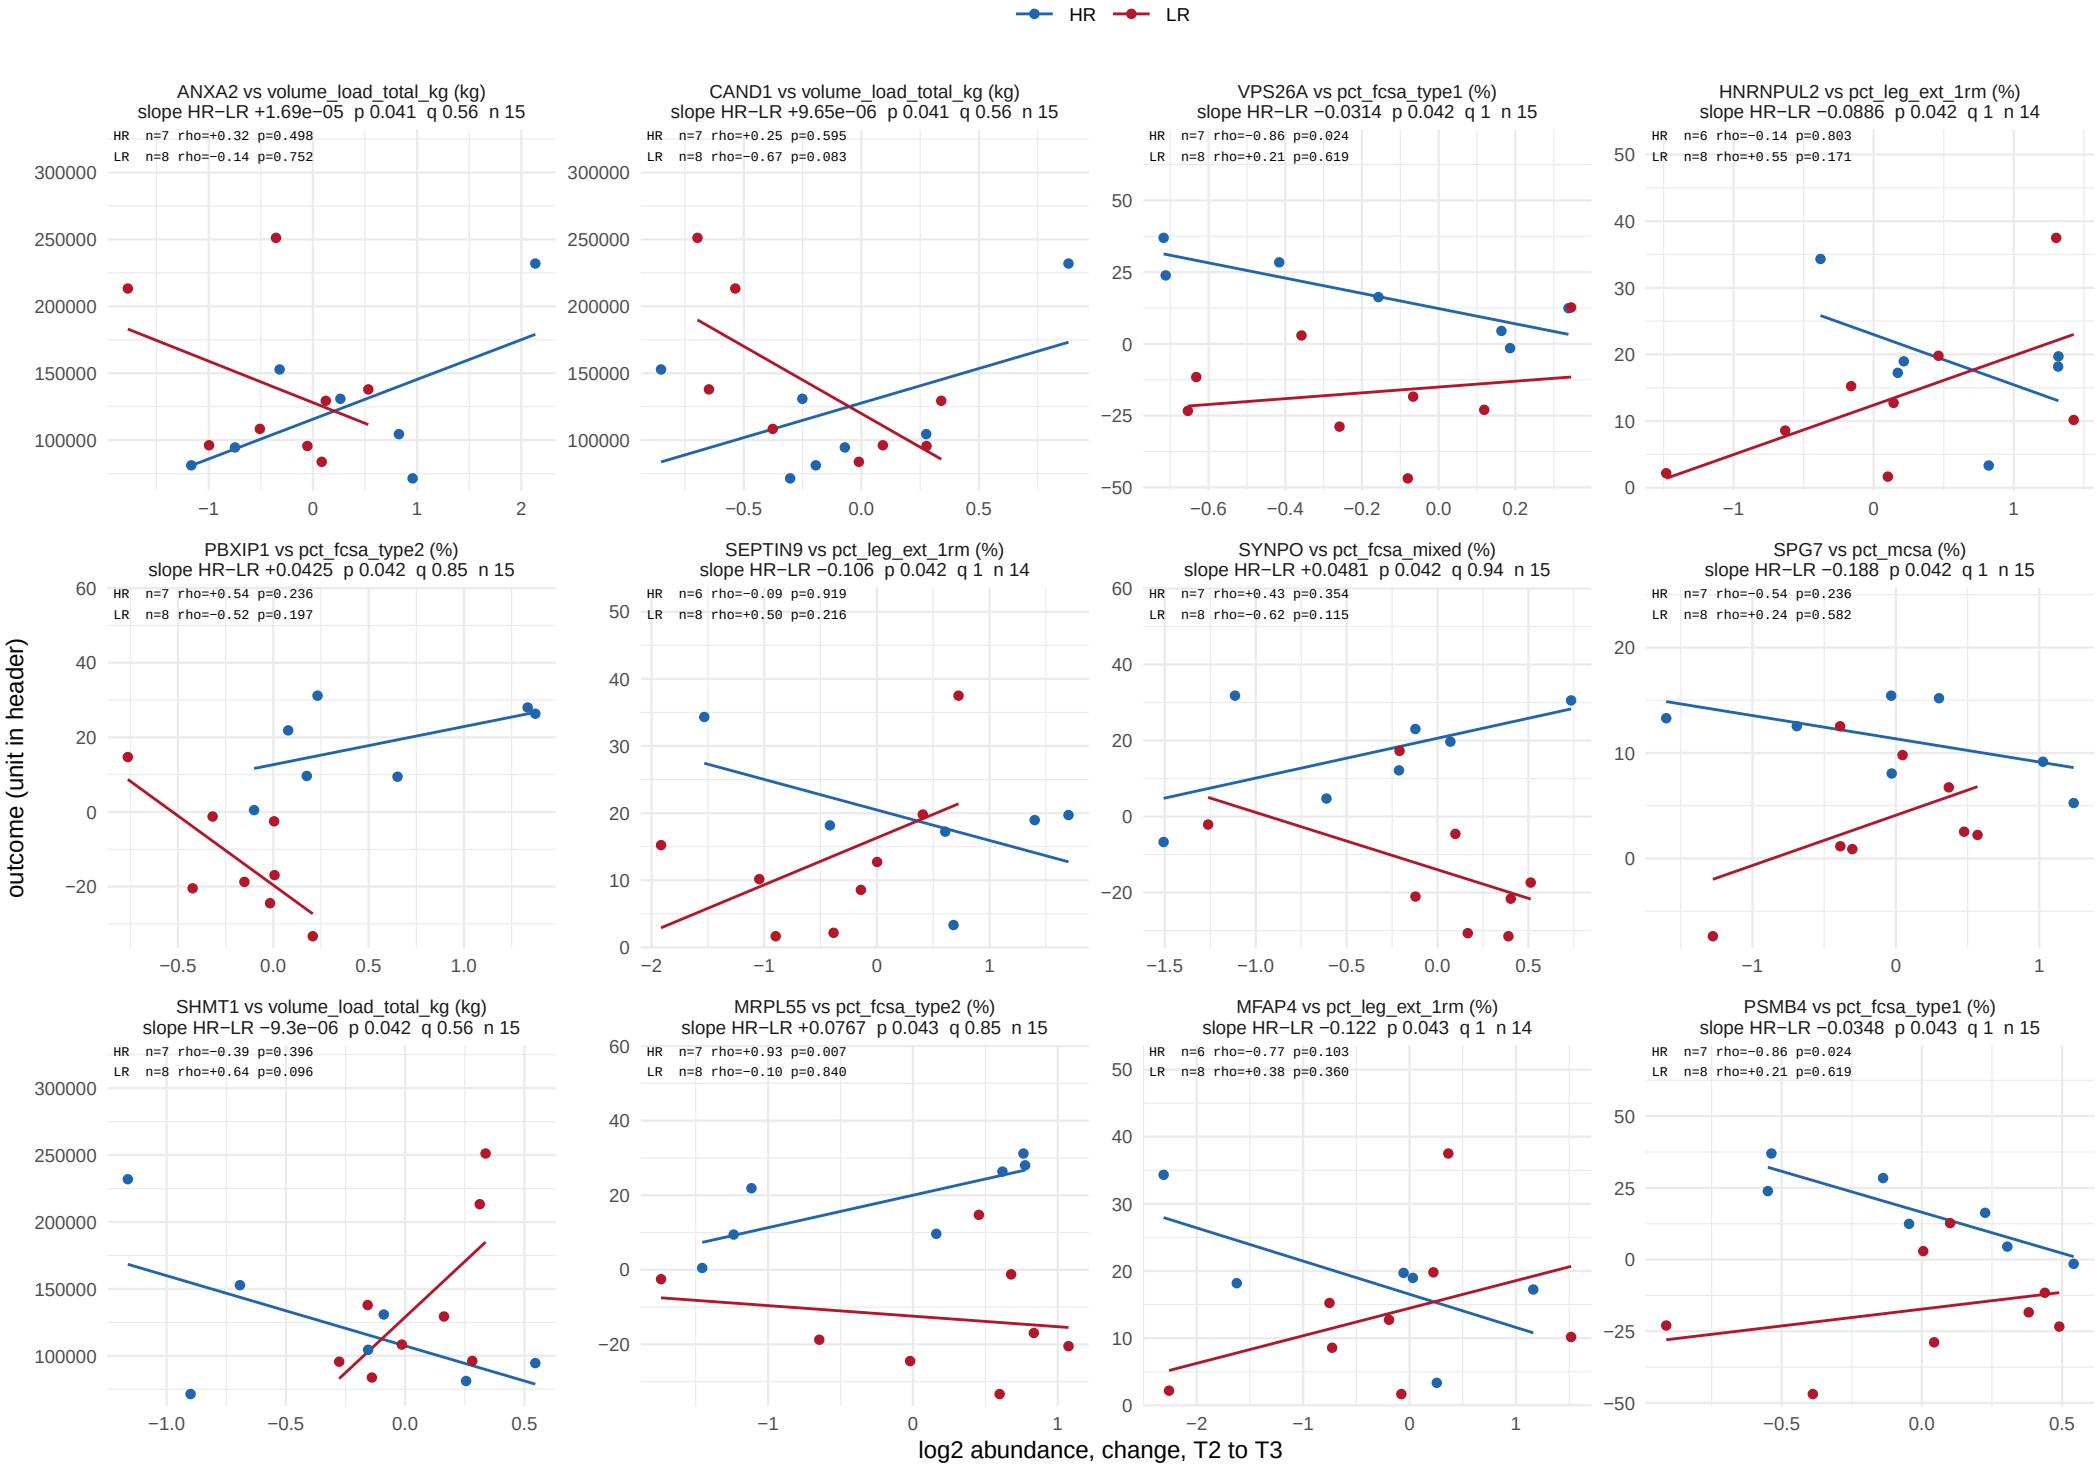

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


645 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 46 of 54.

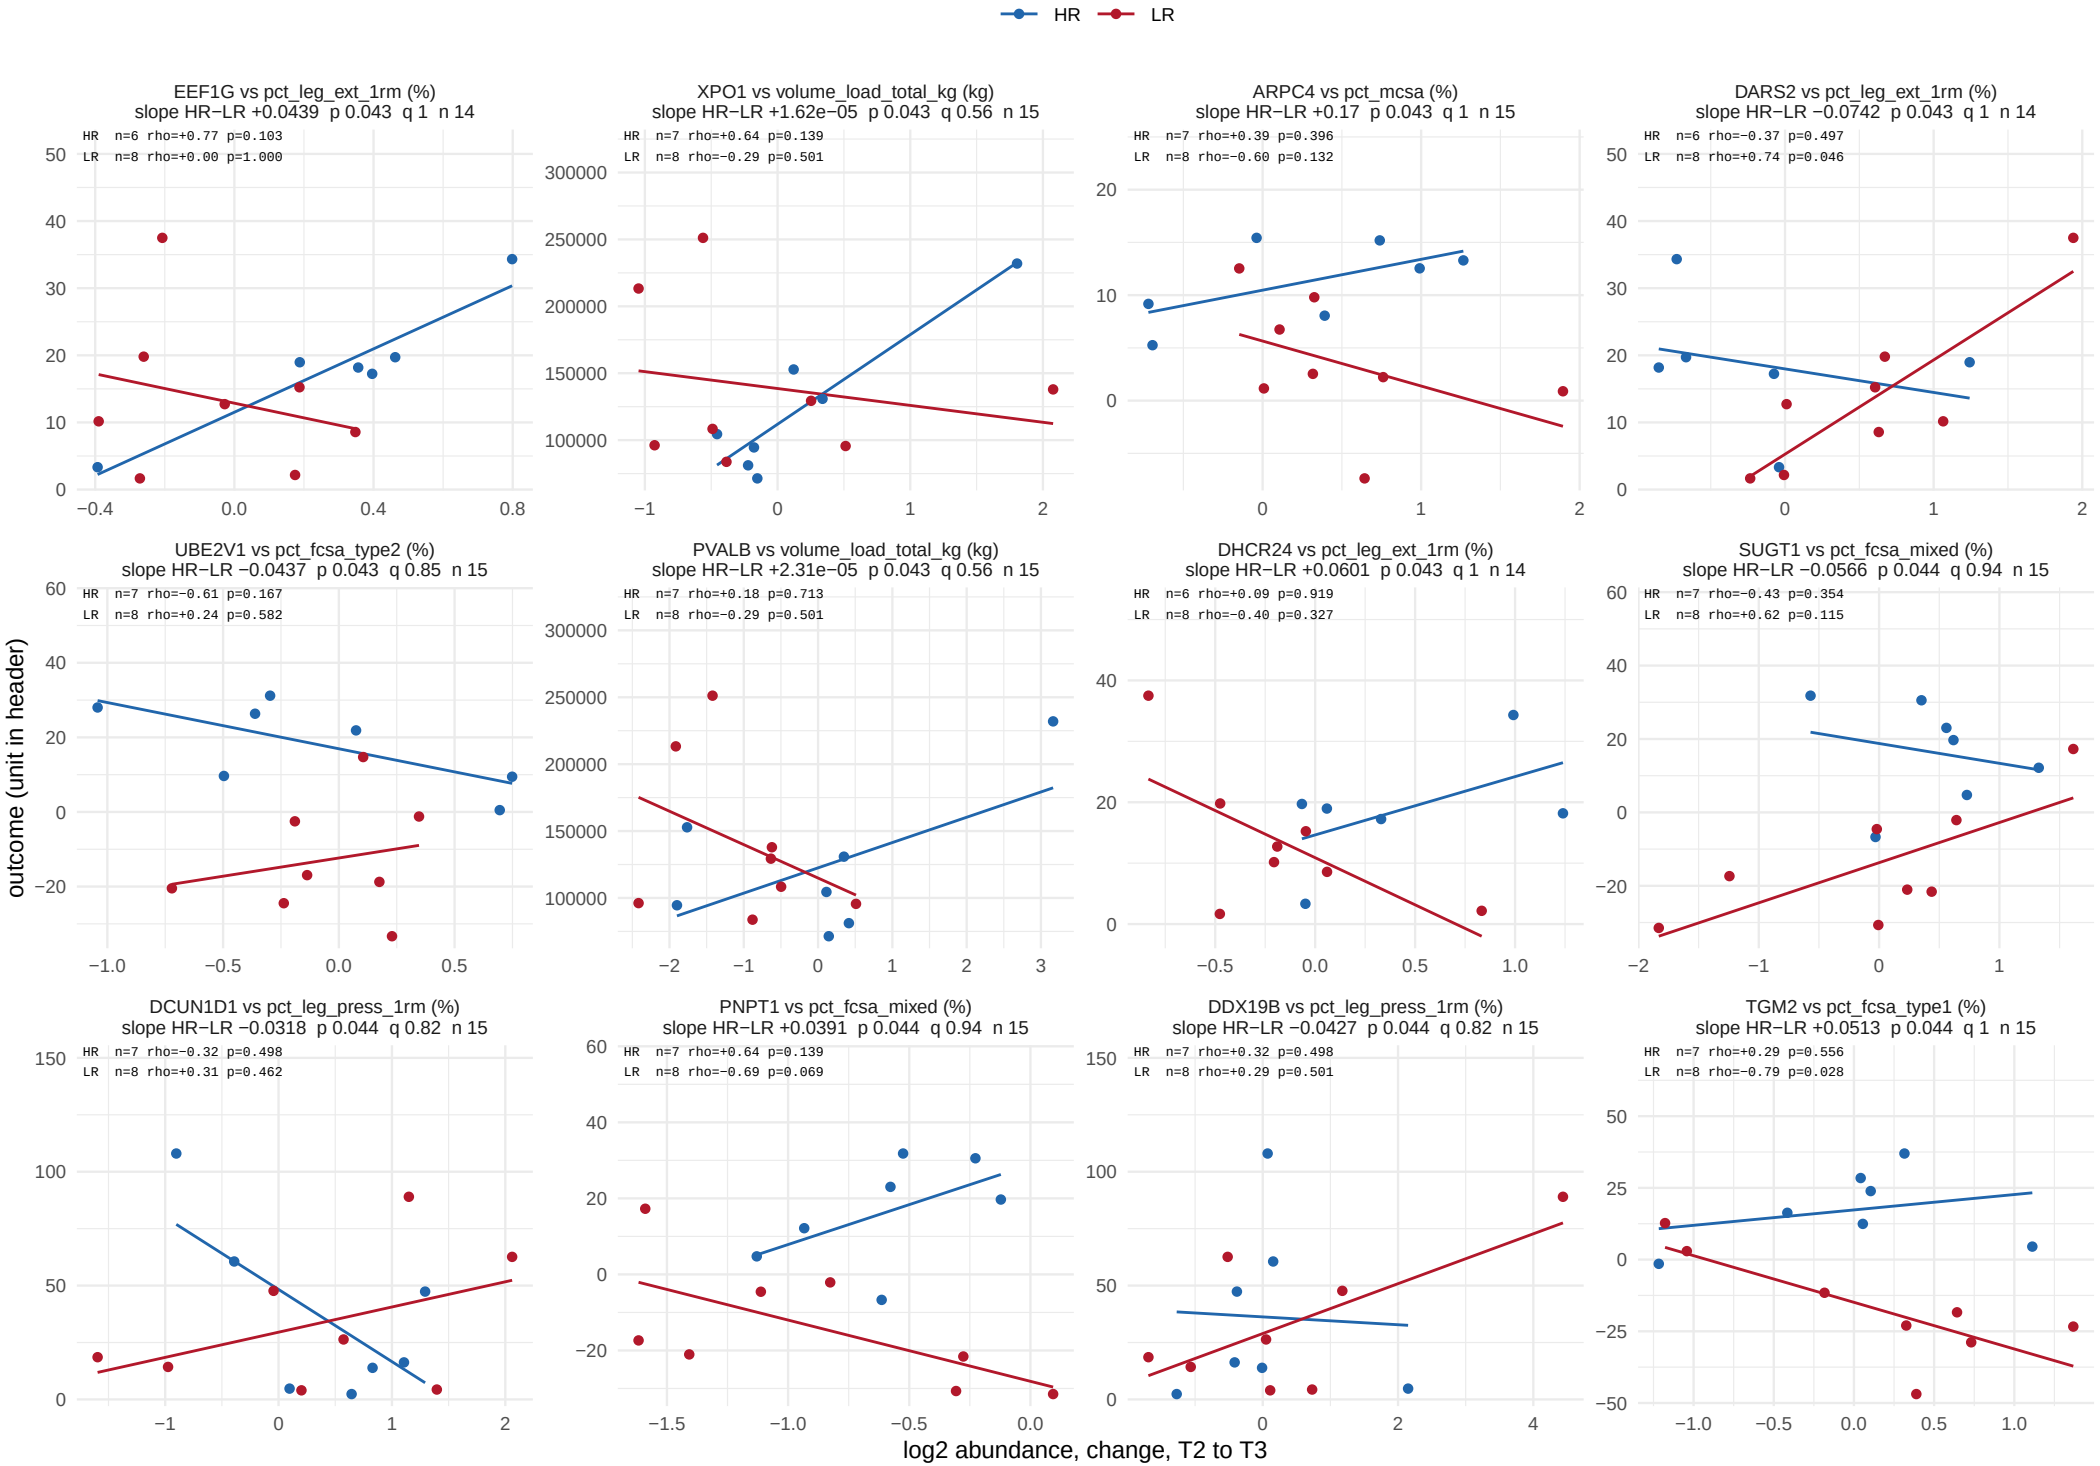

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


645 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 47 of 54.

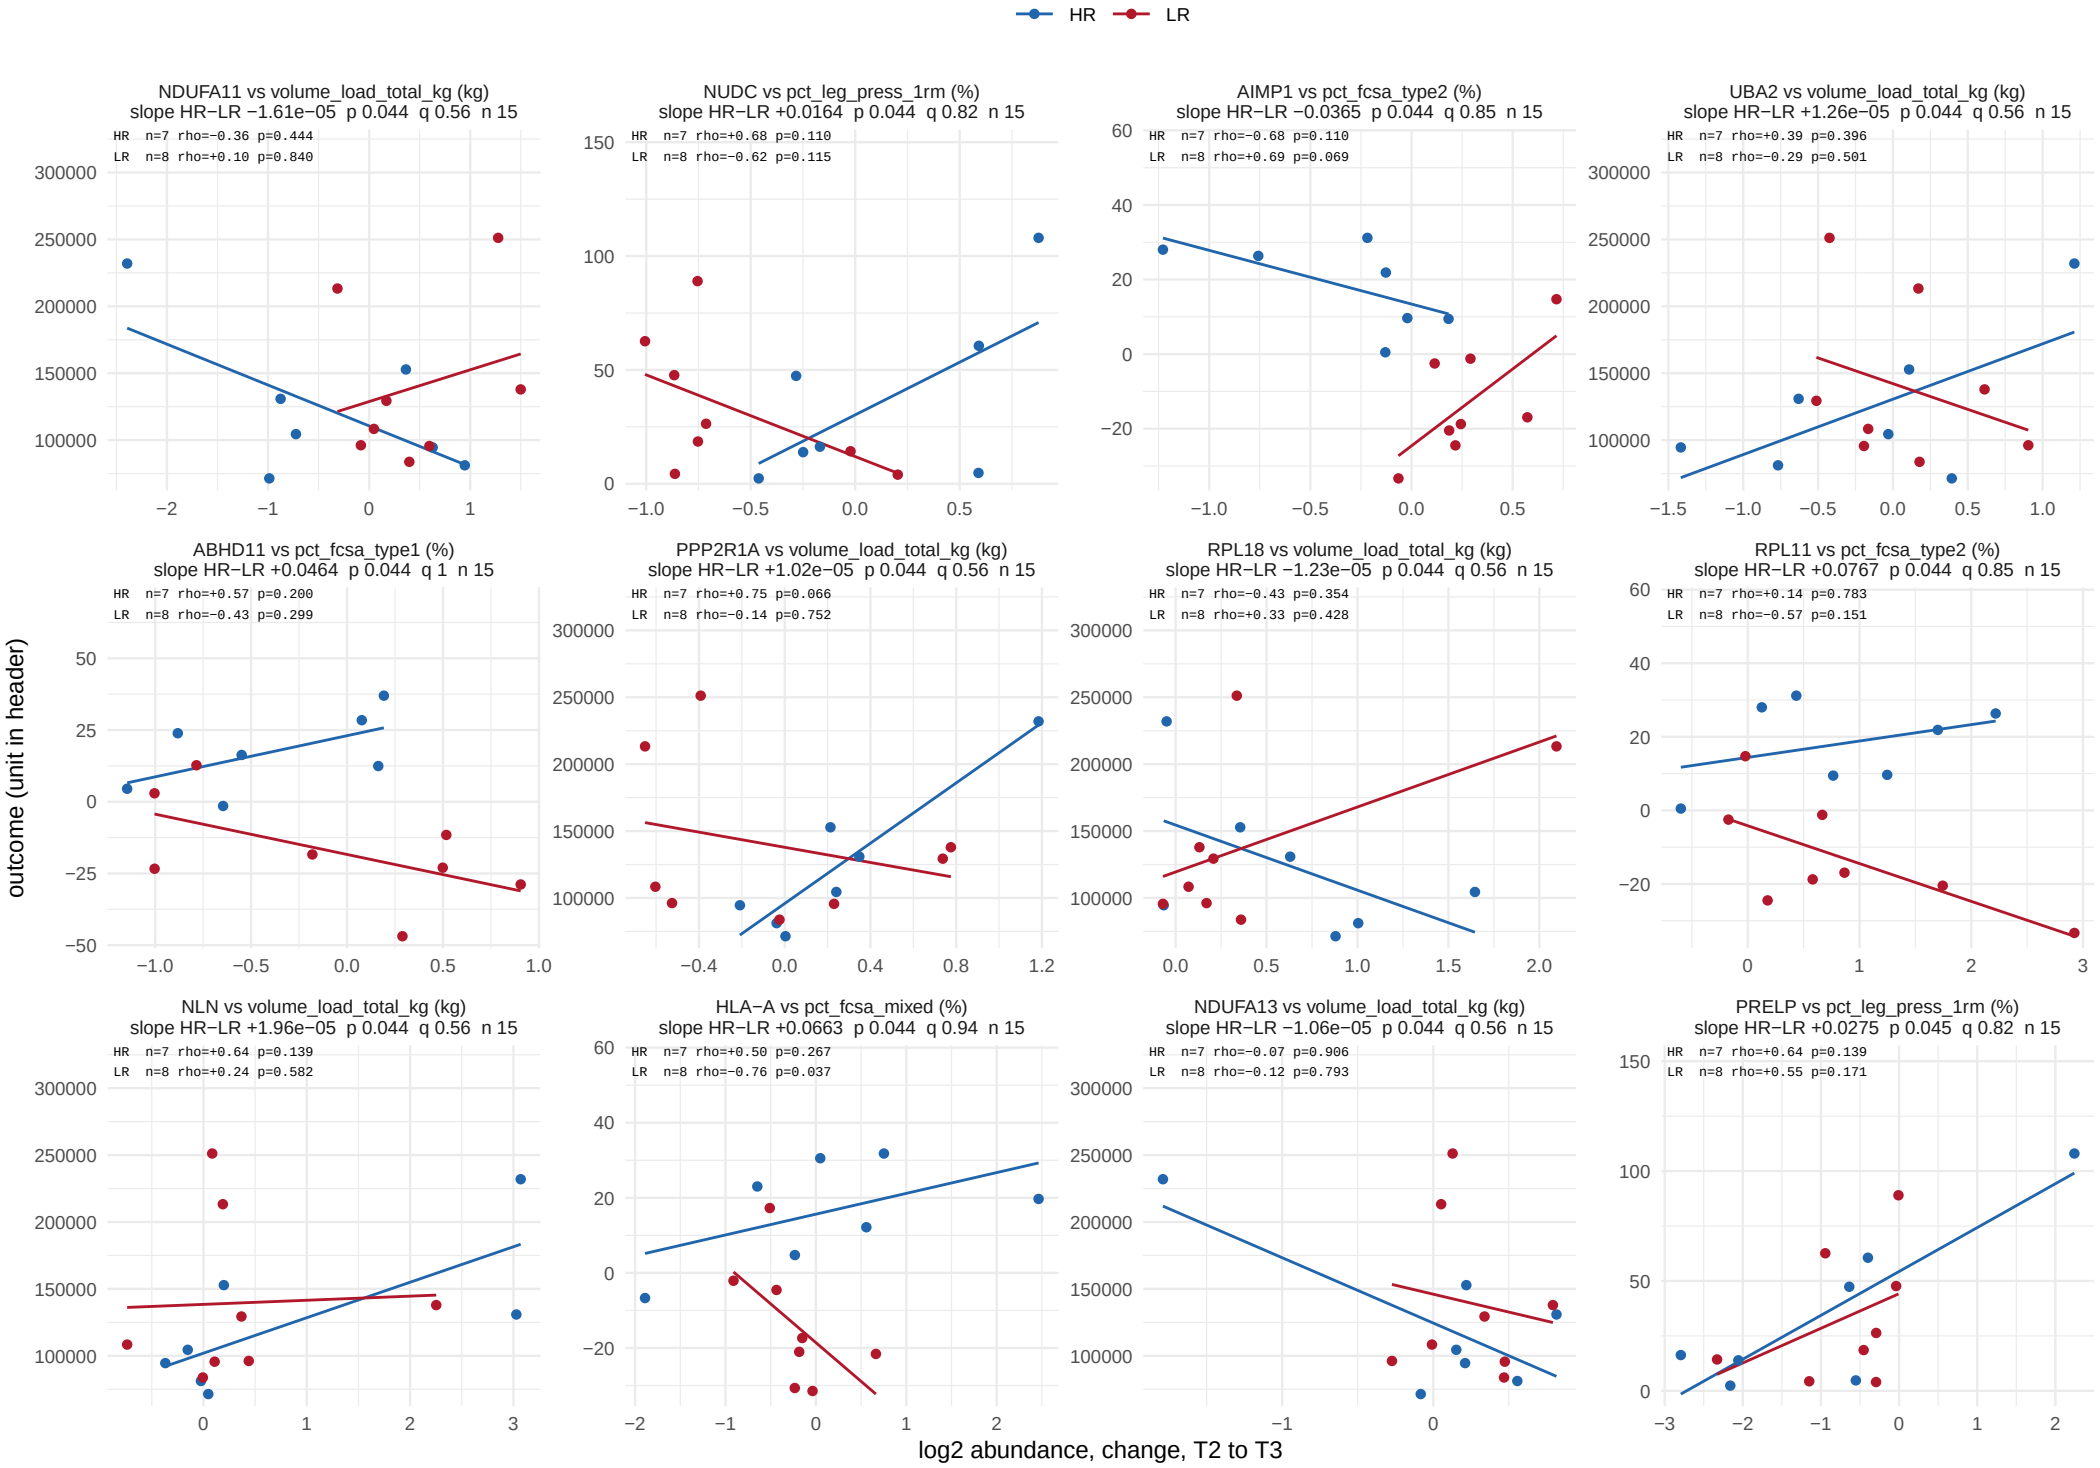

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


645 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 48 of 54.

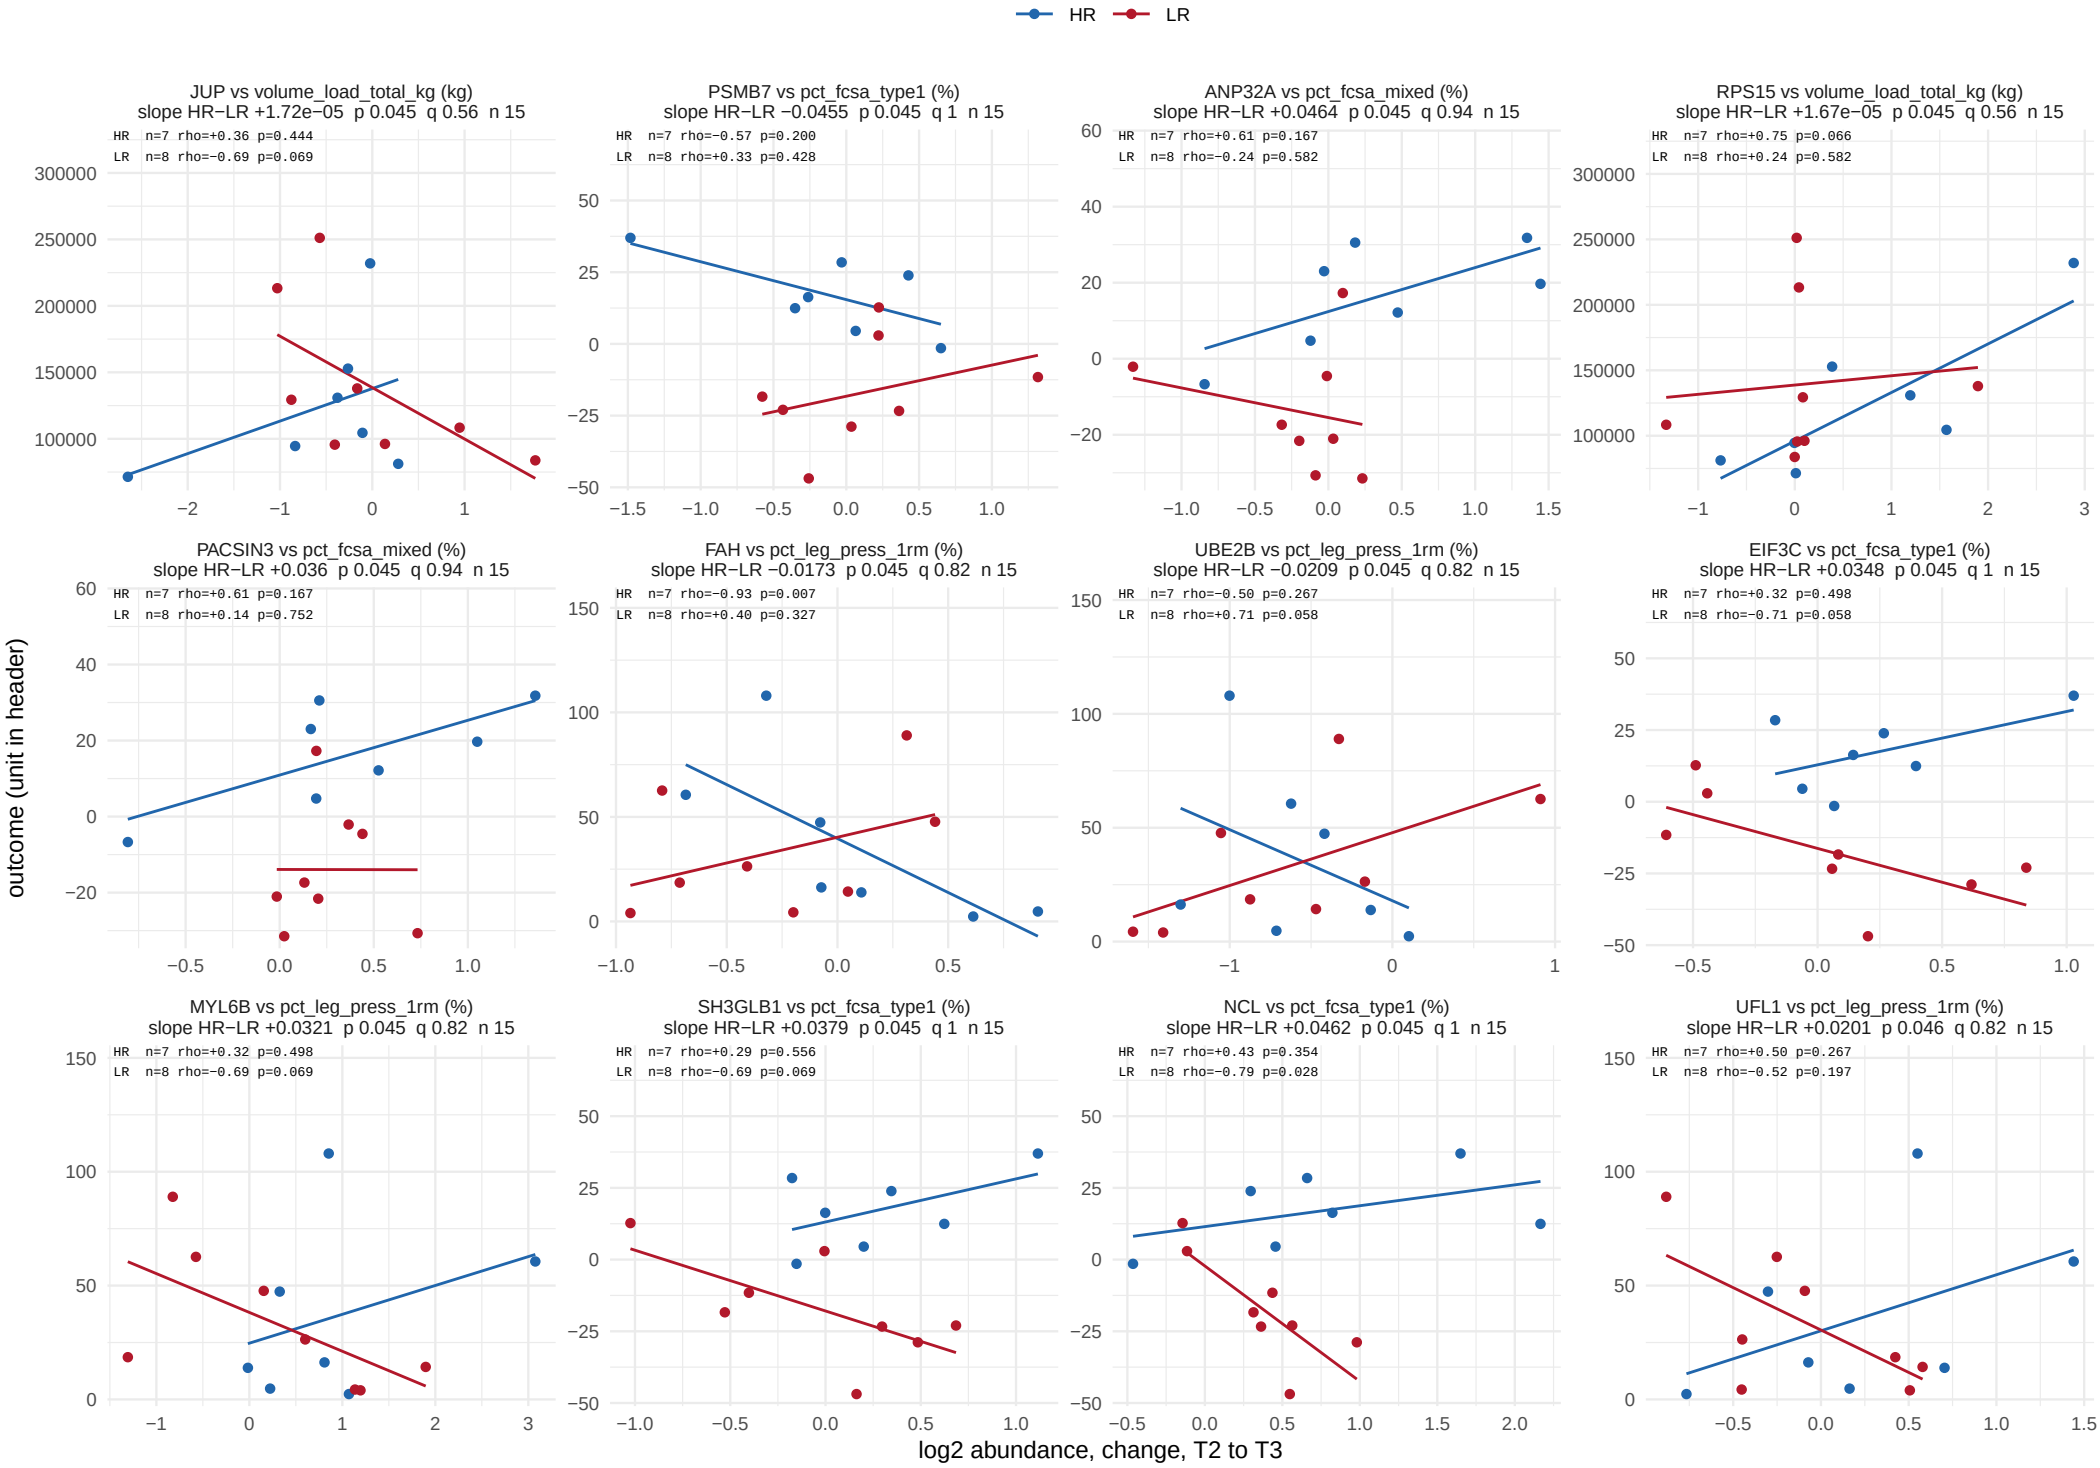

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


645 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 49 of 54.

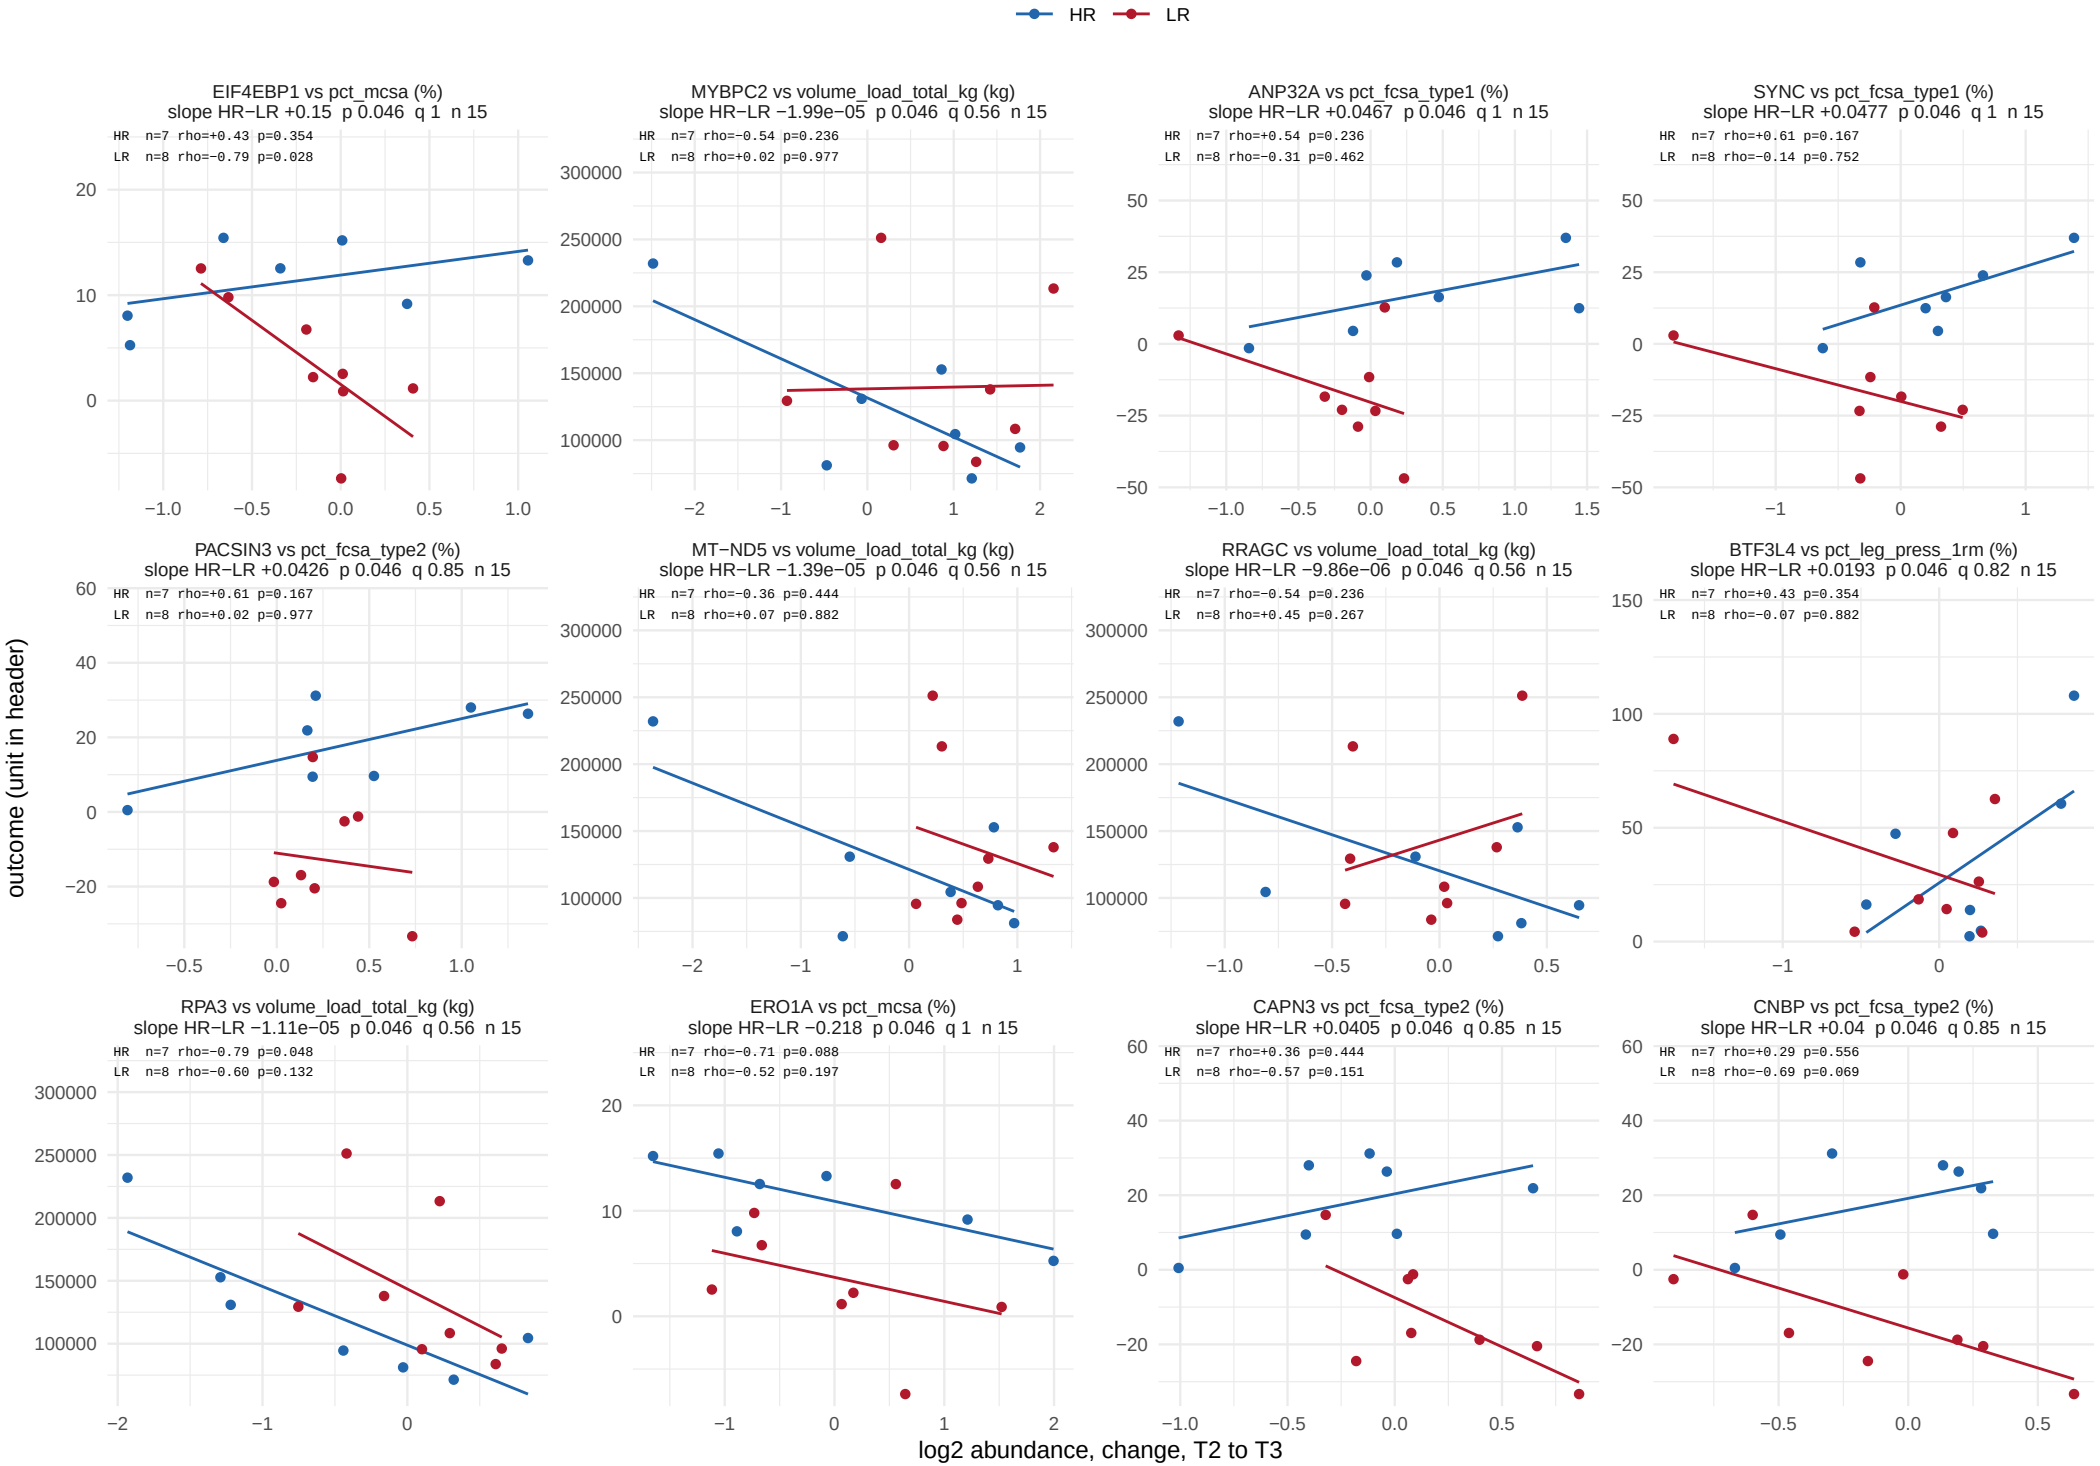

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


645 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 50 of 54.

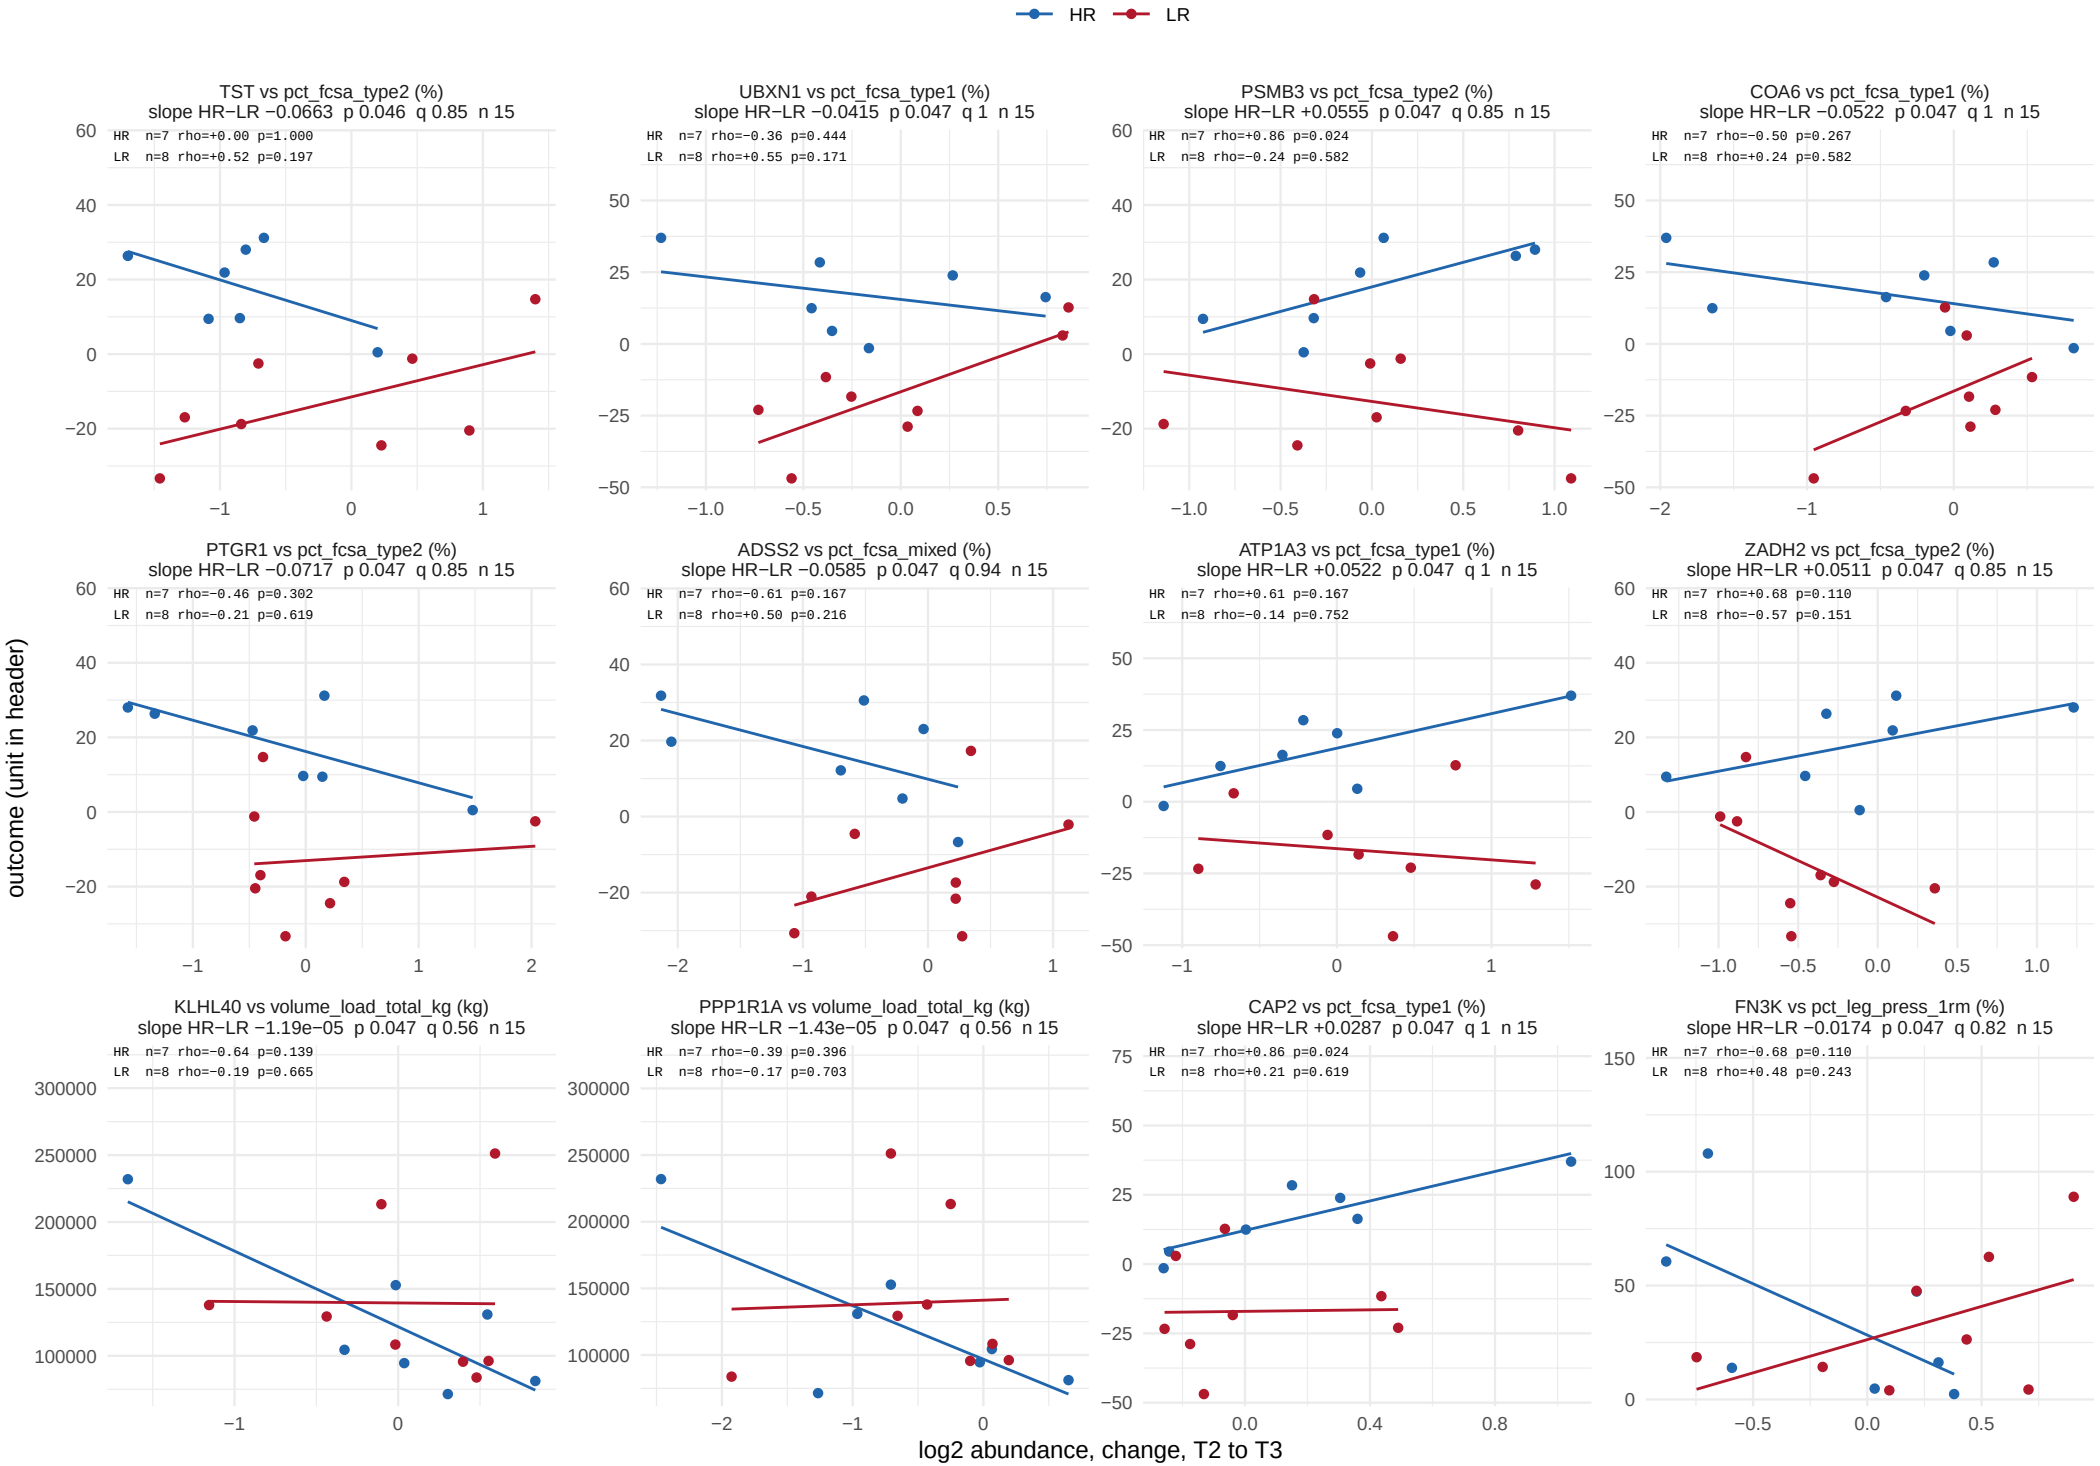

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


645 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 51 of 54.

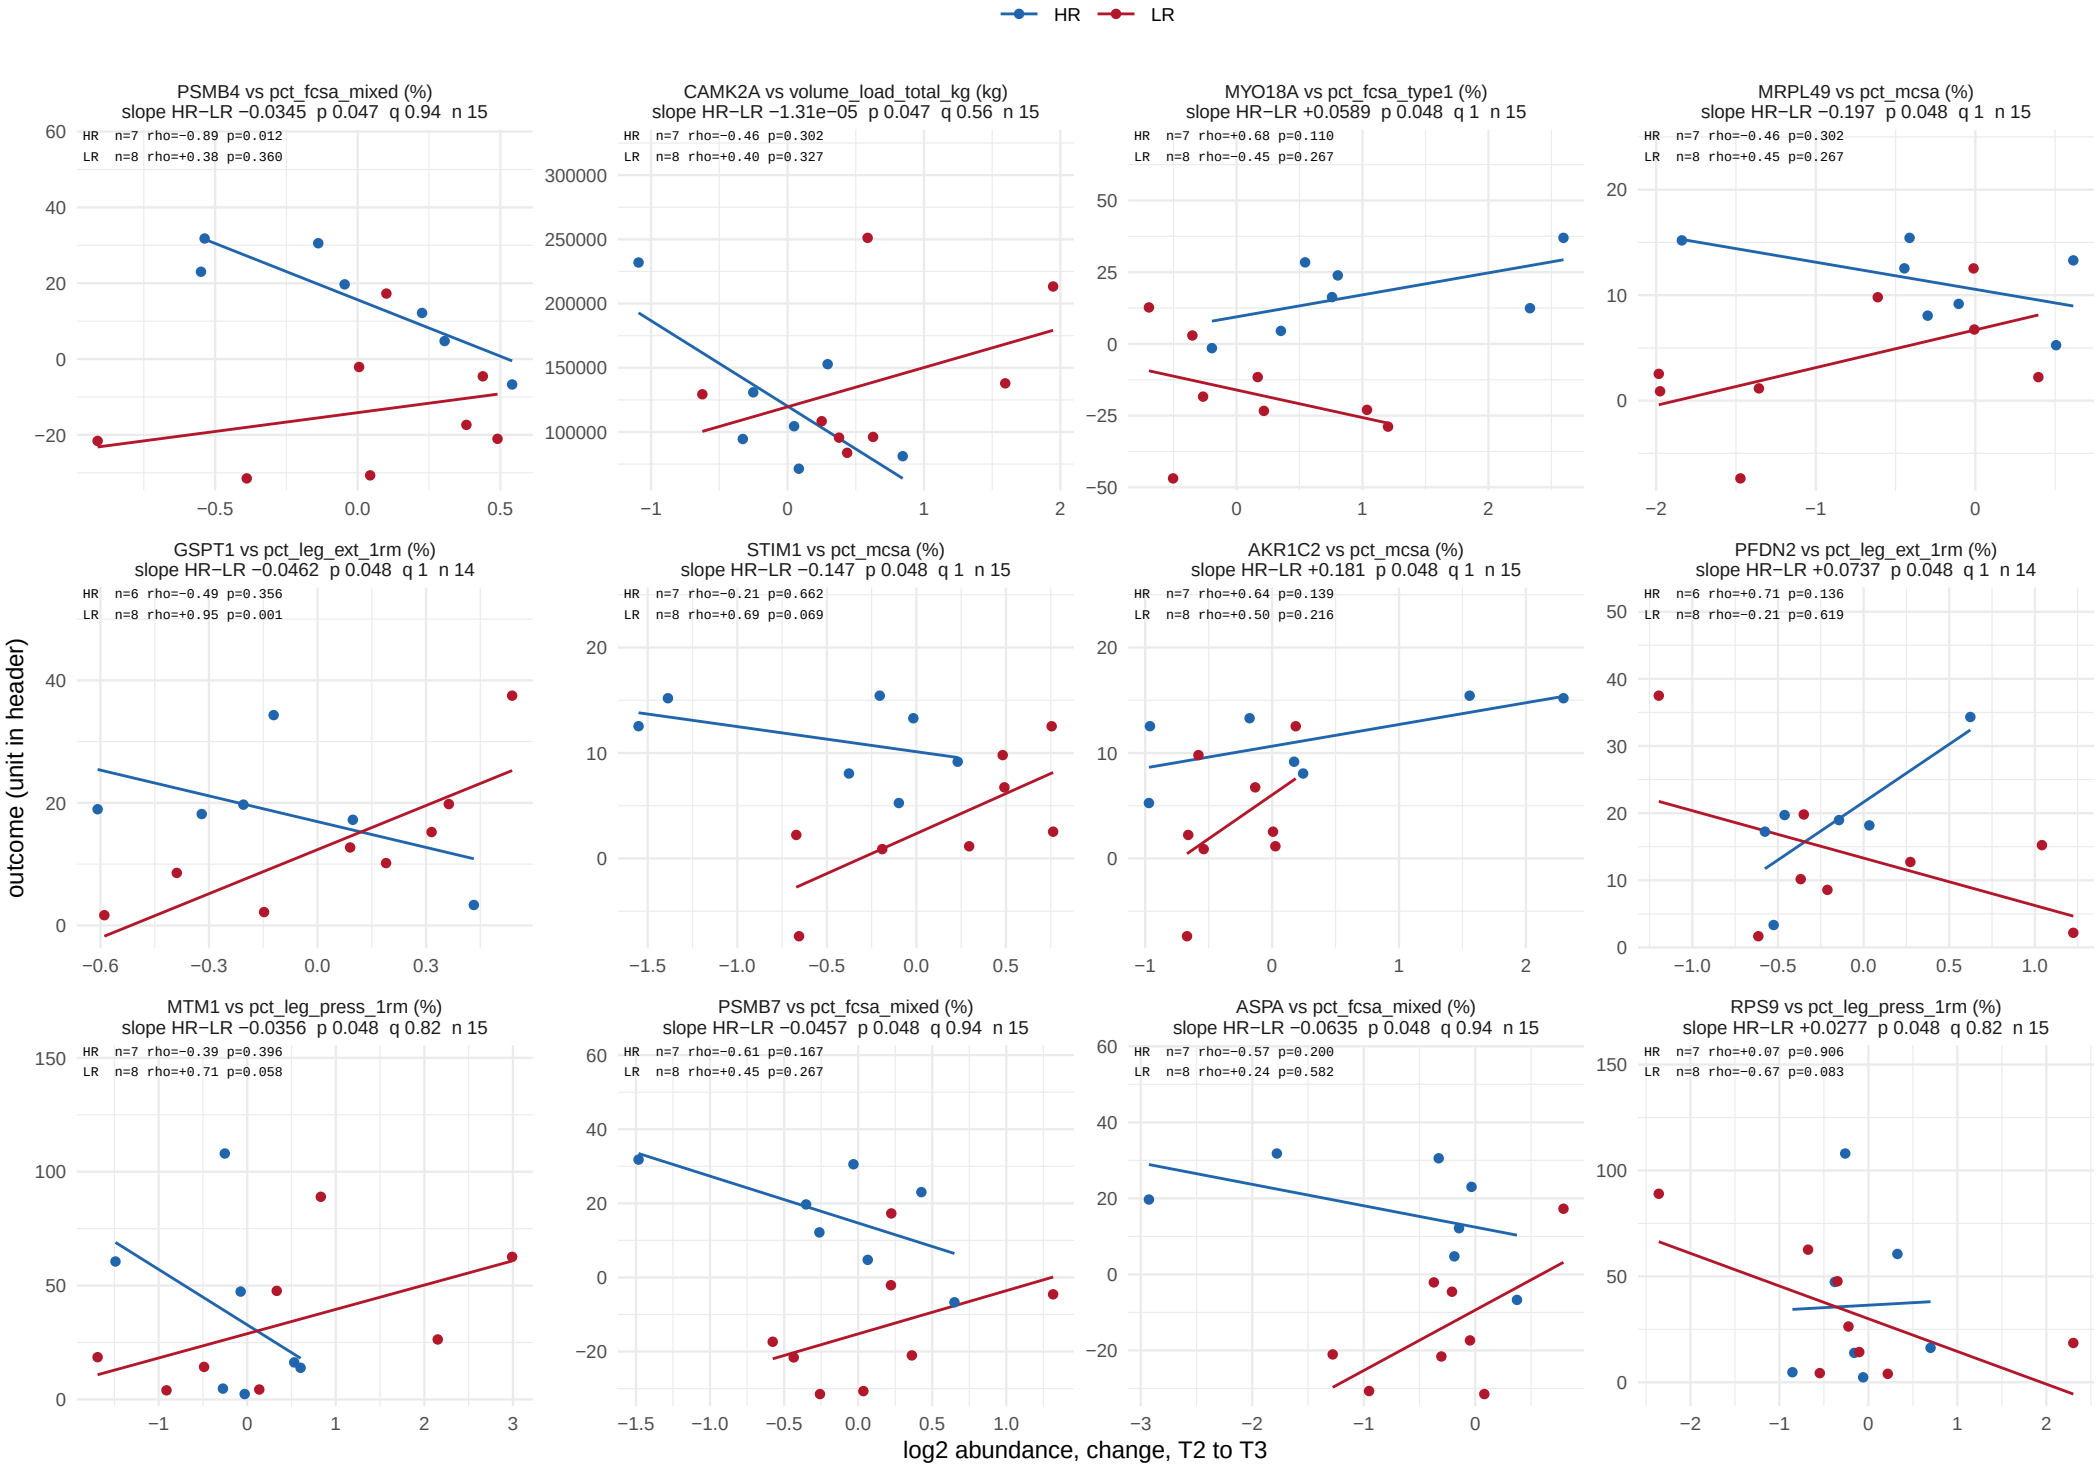

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


645 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 52 of 54.

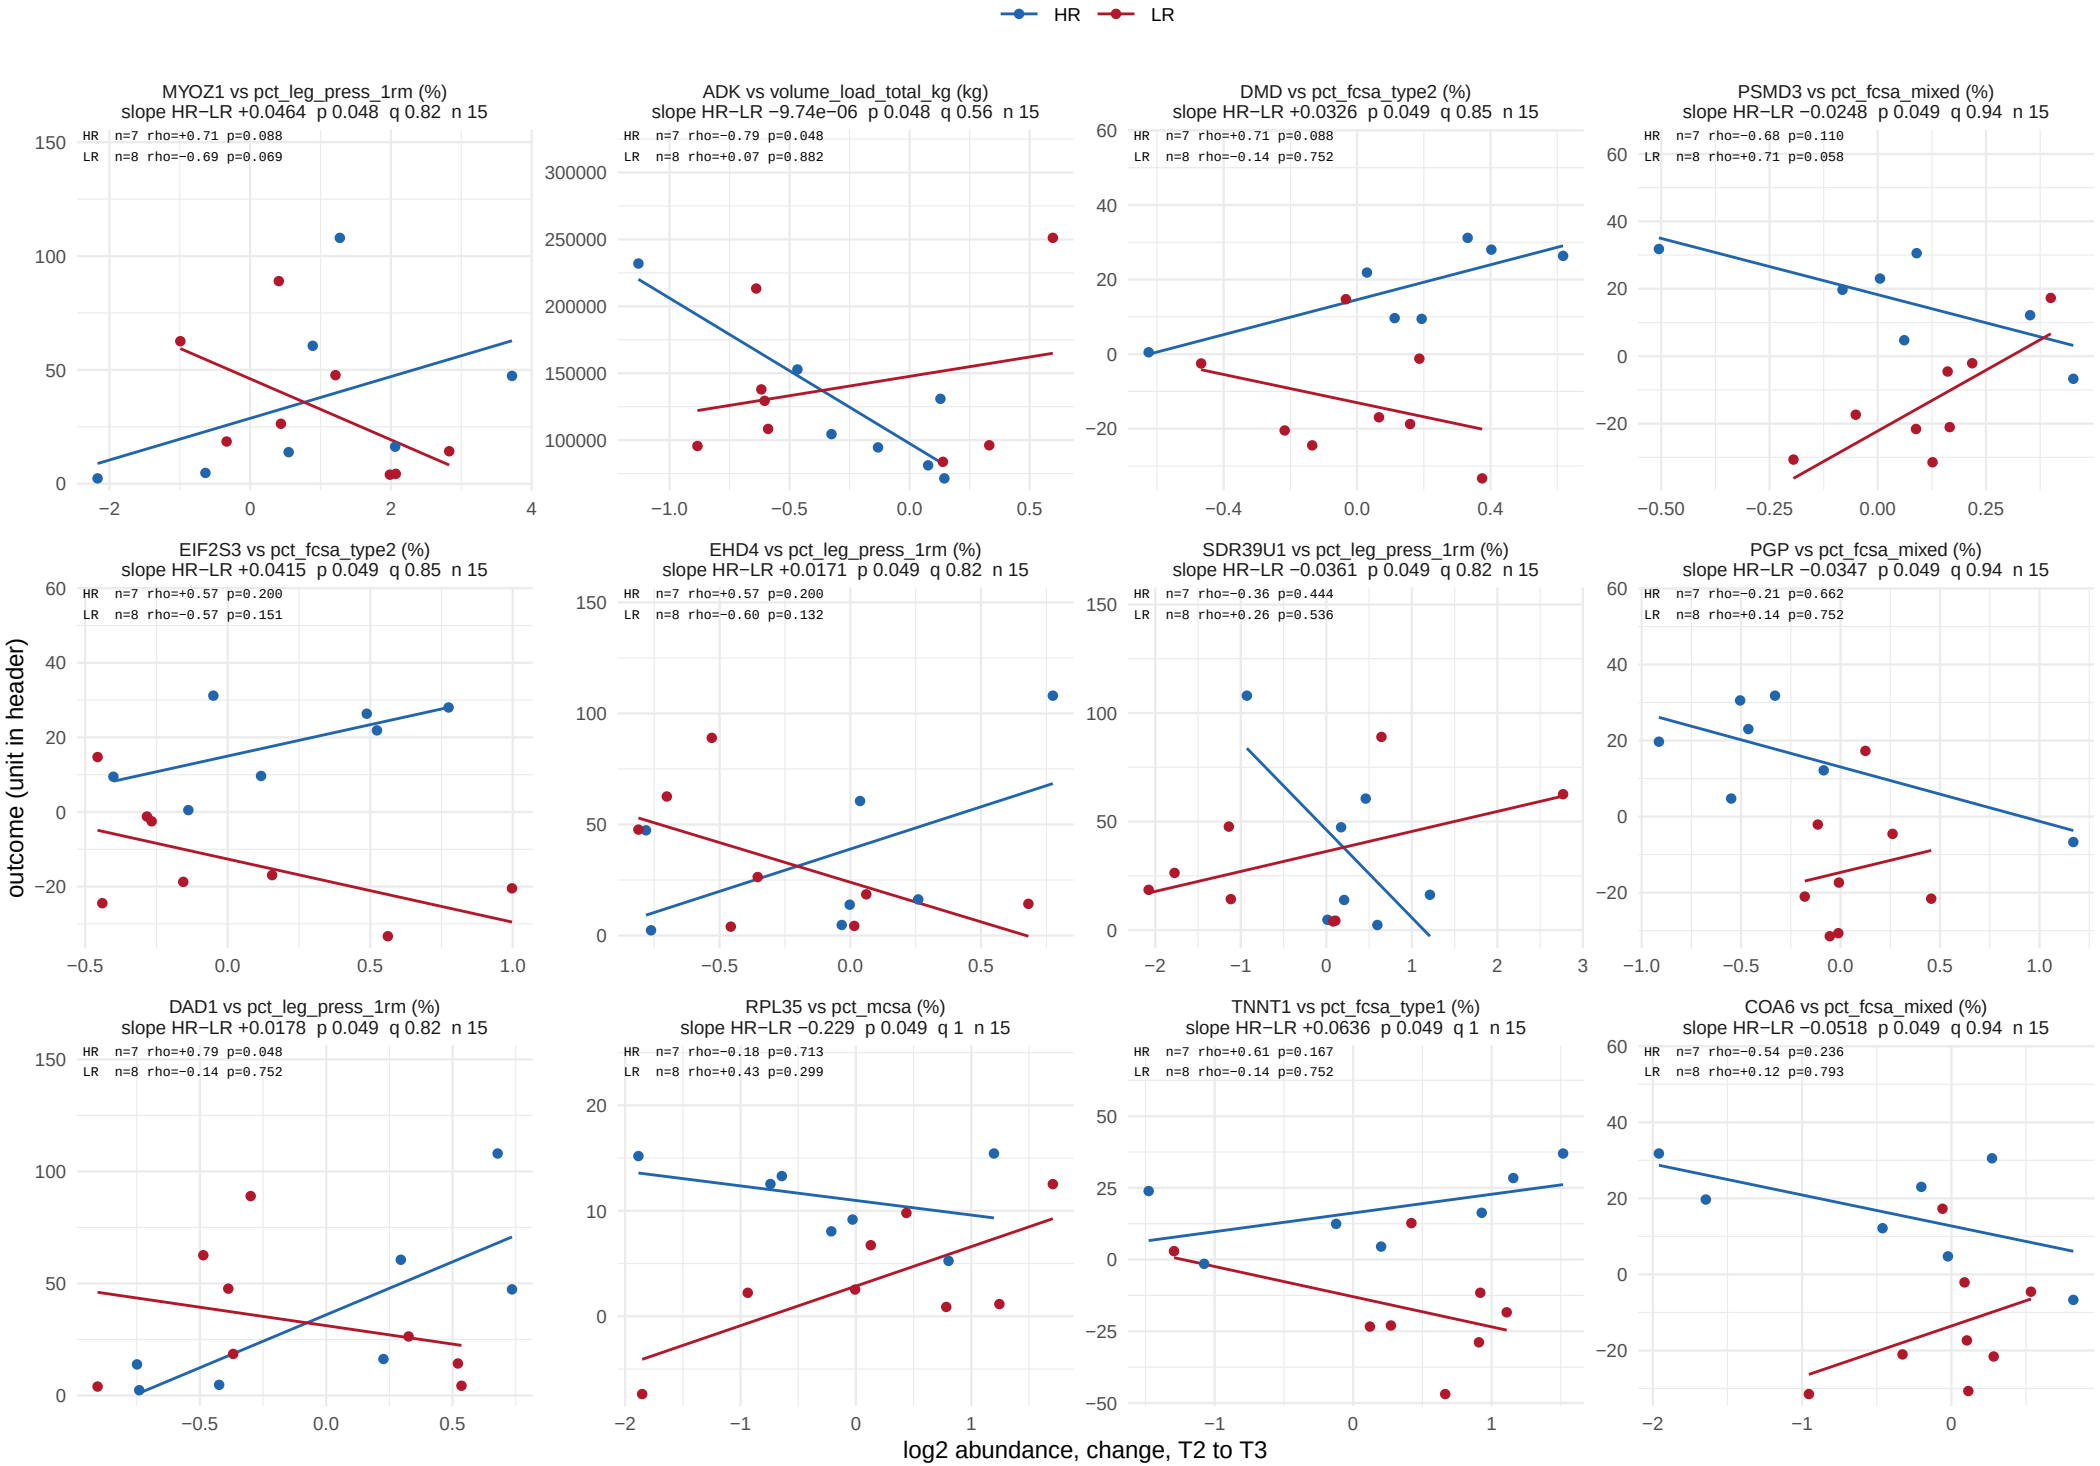

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


645 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 53 of 54.

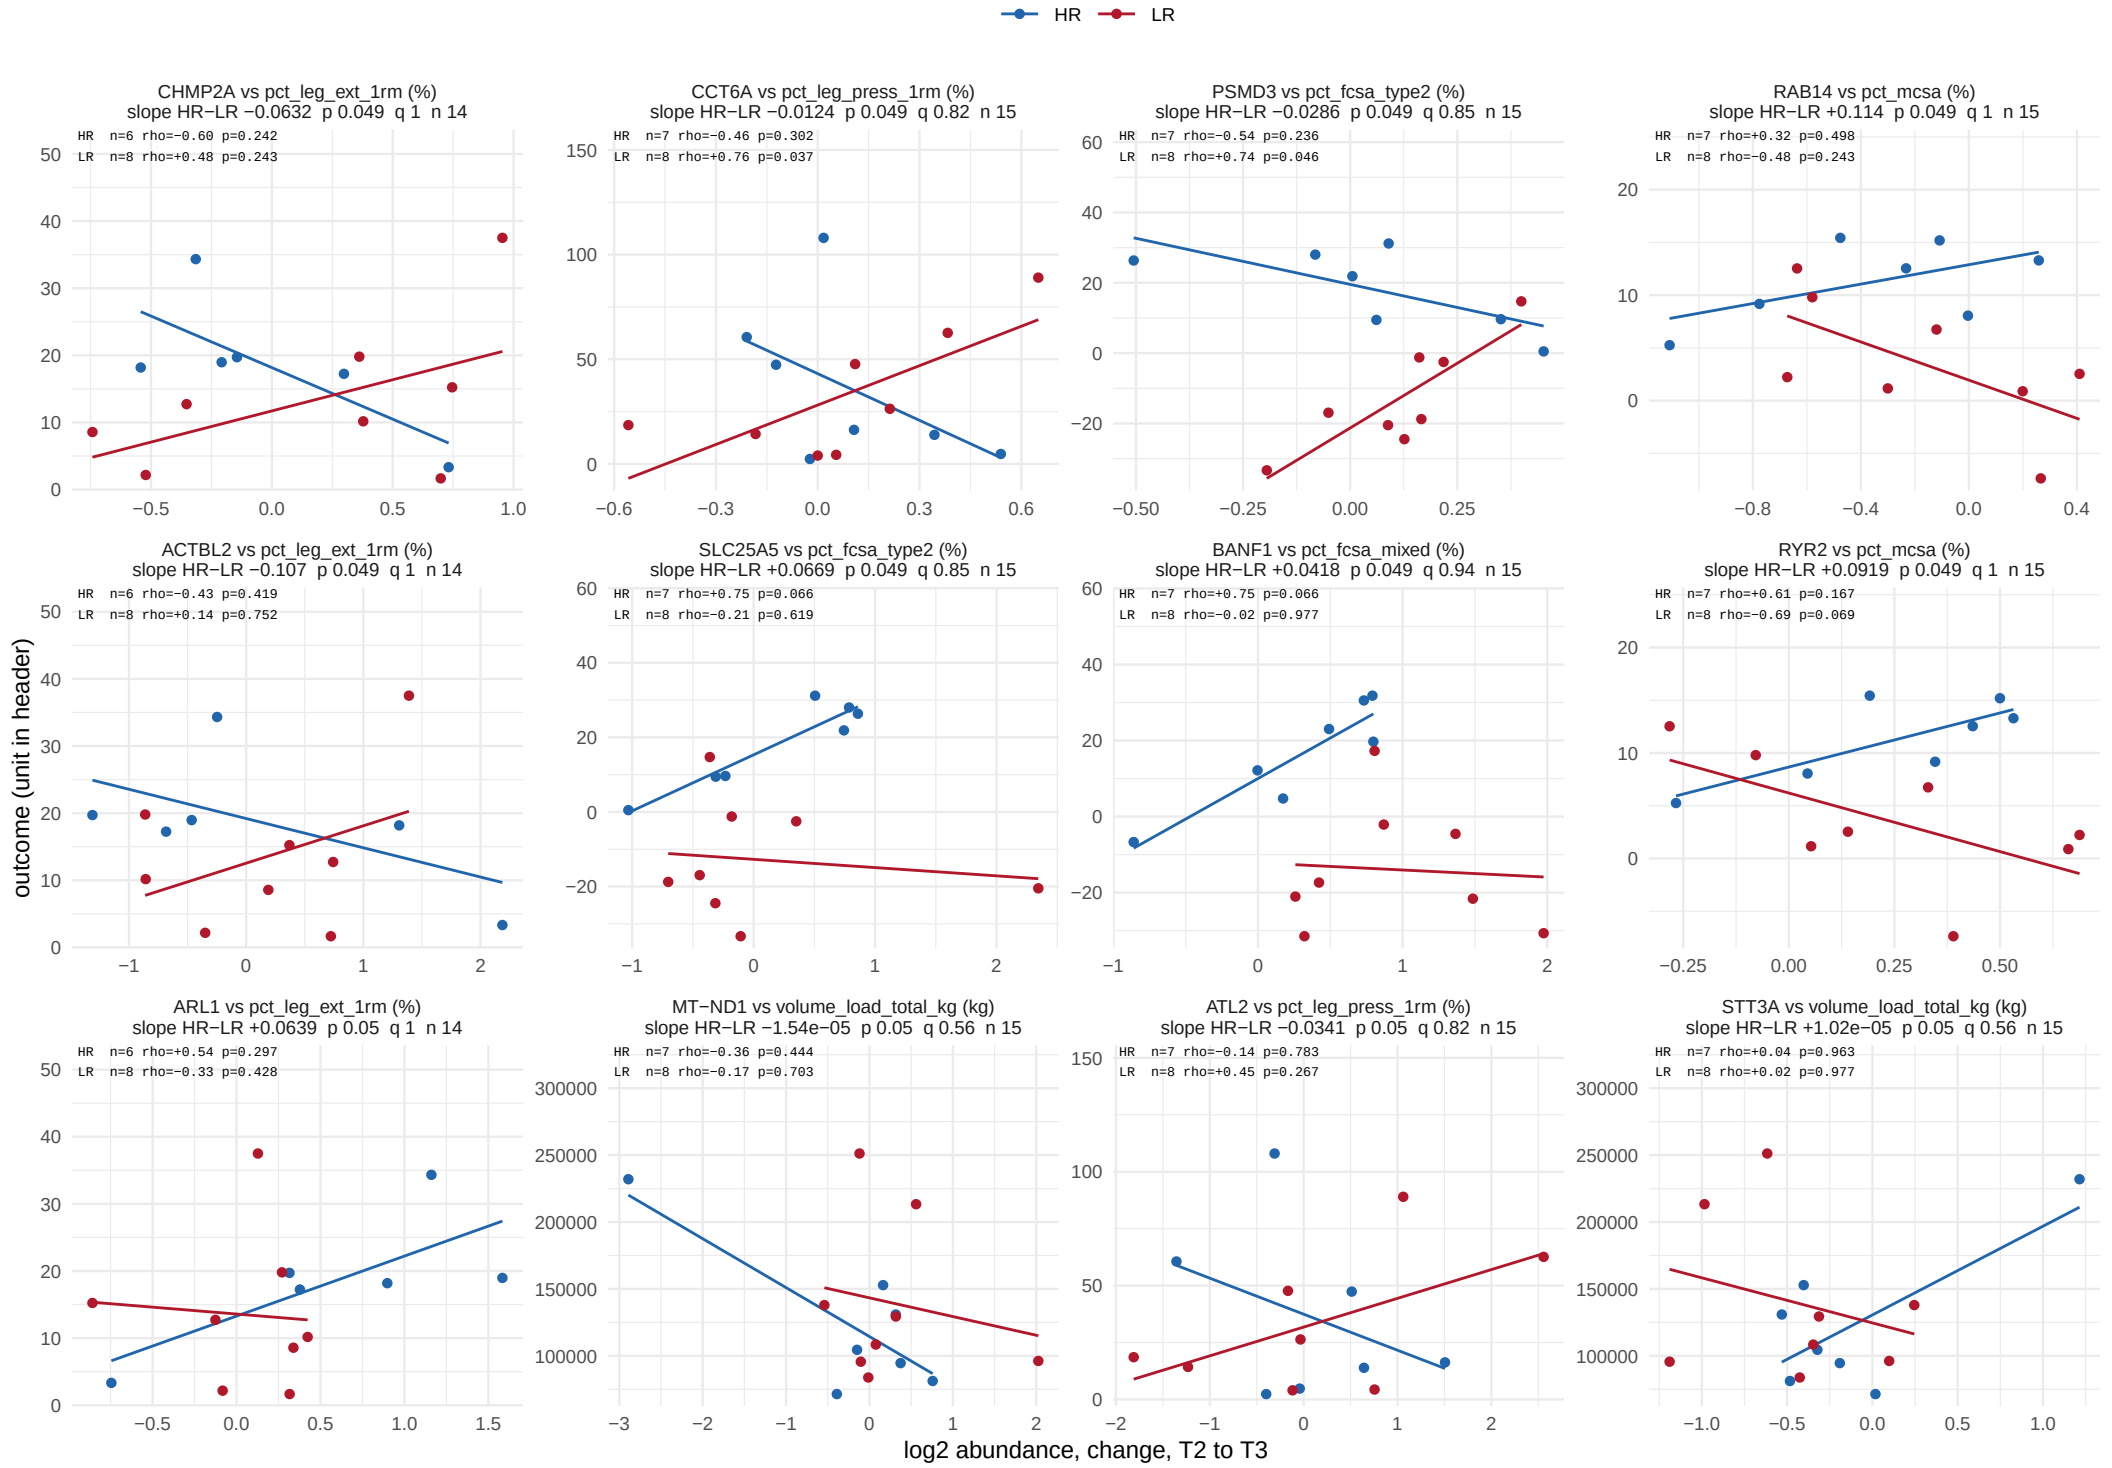

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


645 of 13300 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 54 of 54.

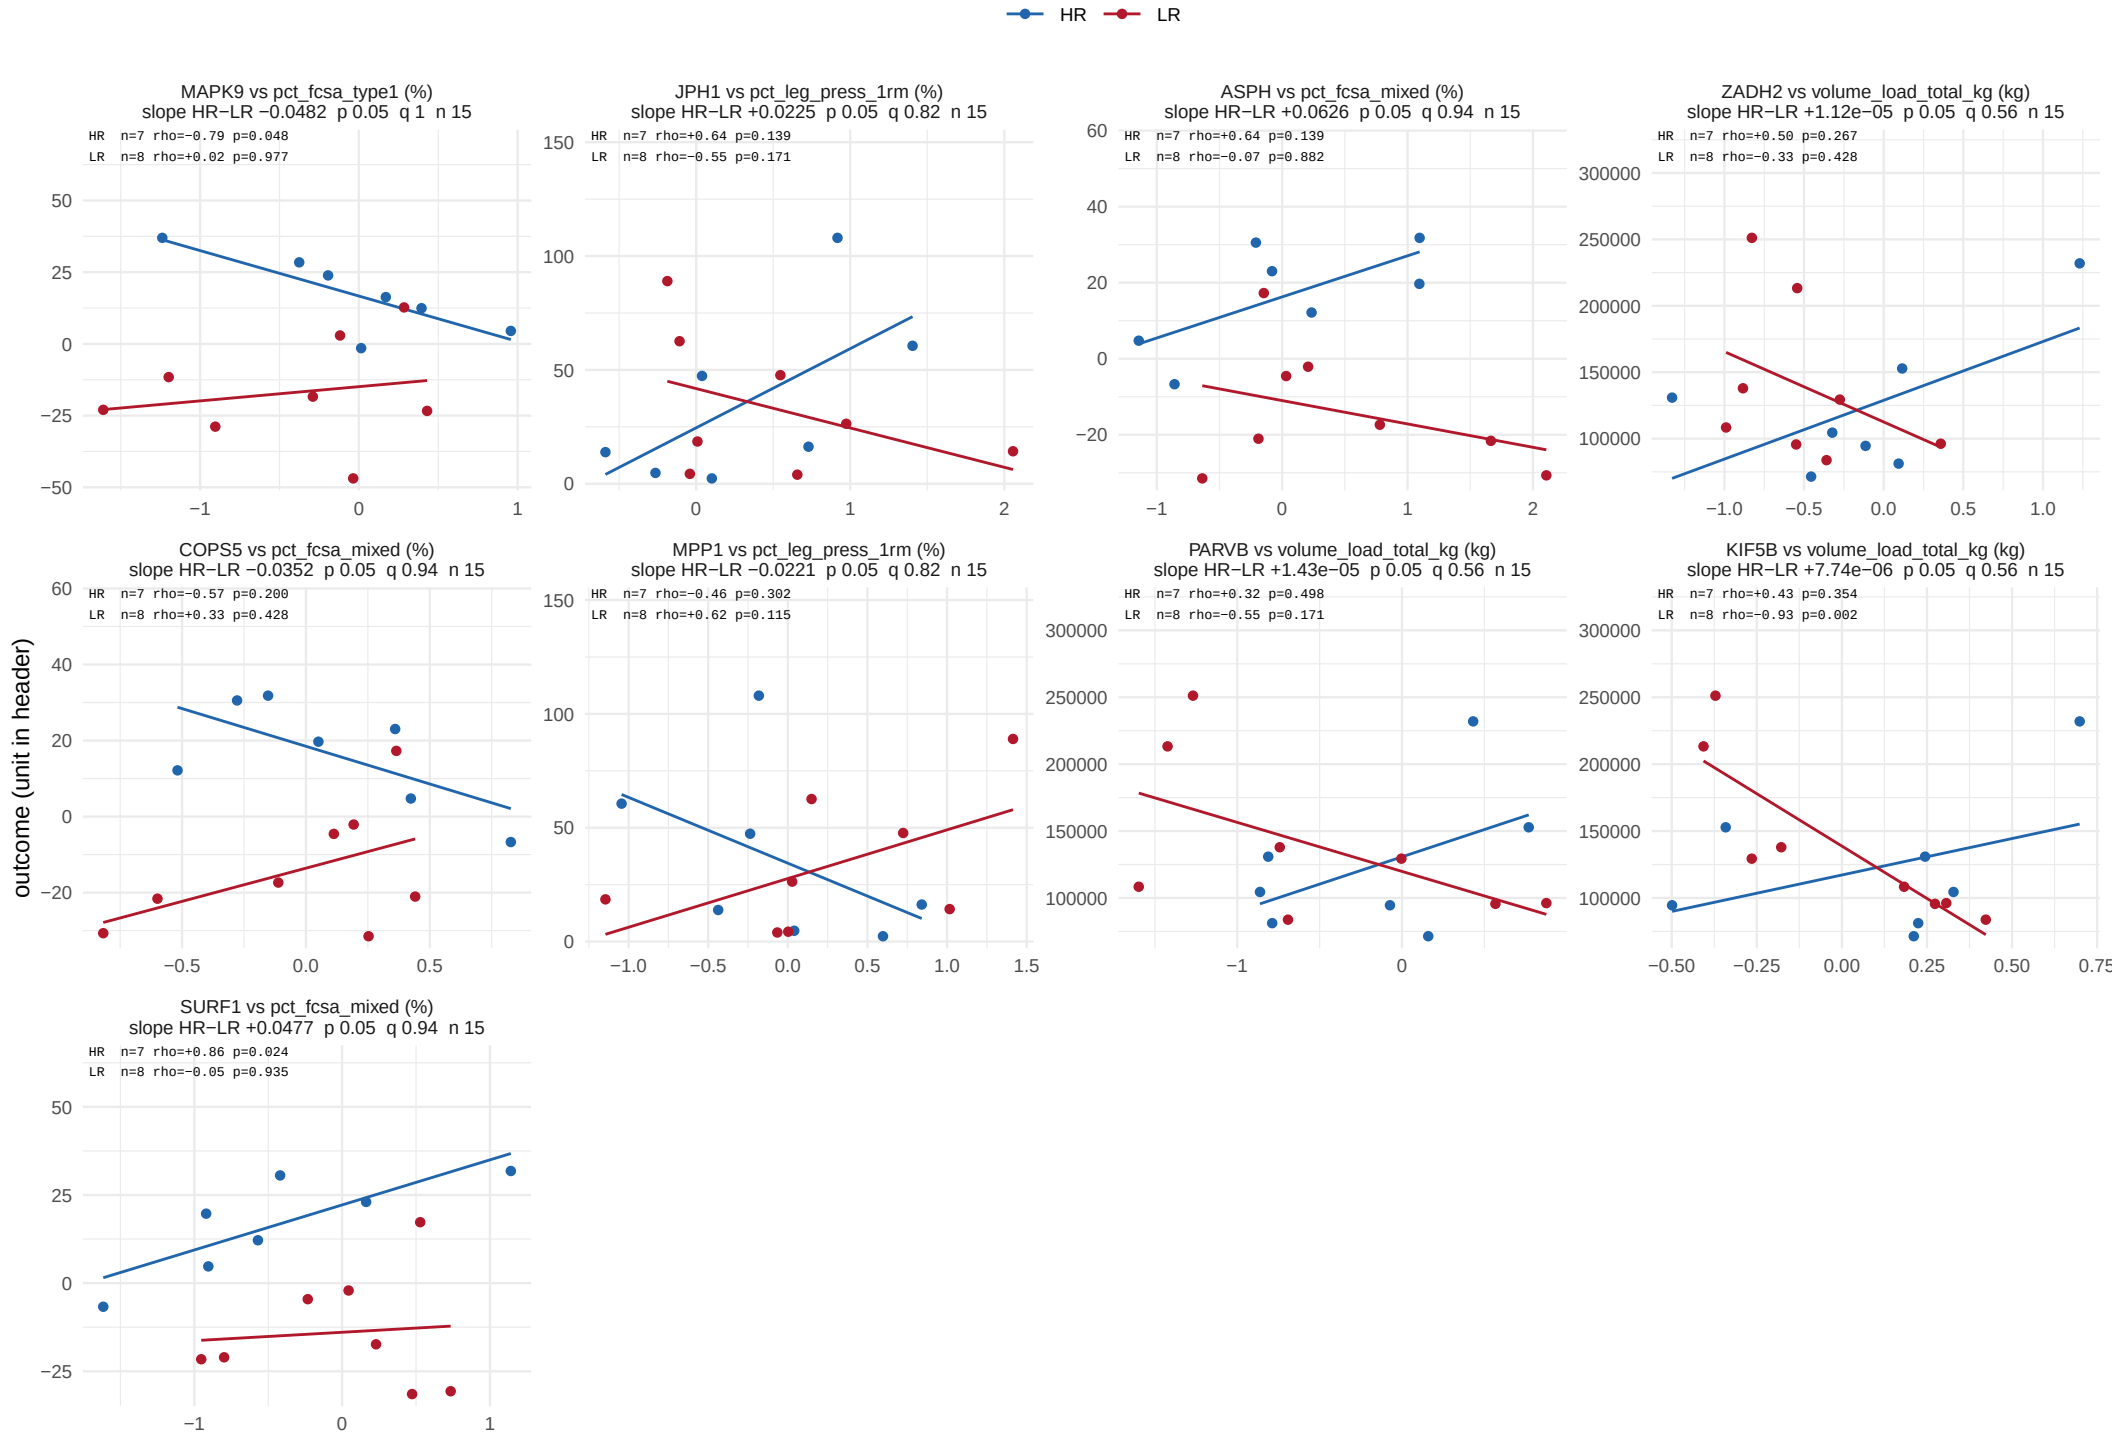

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Two predictor, training window


311 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 1 of 26.

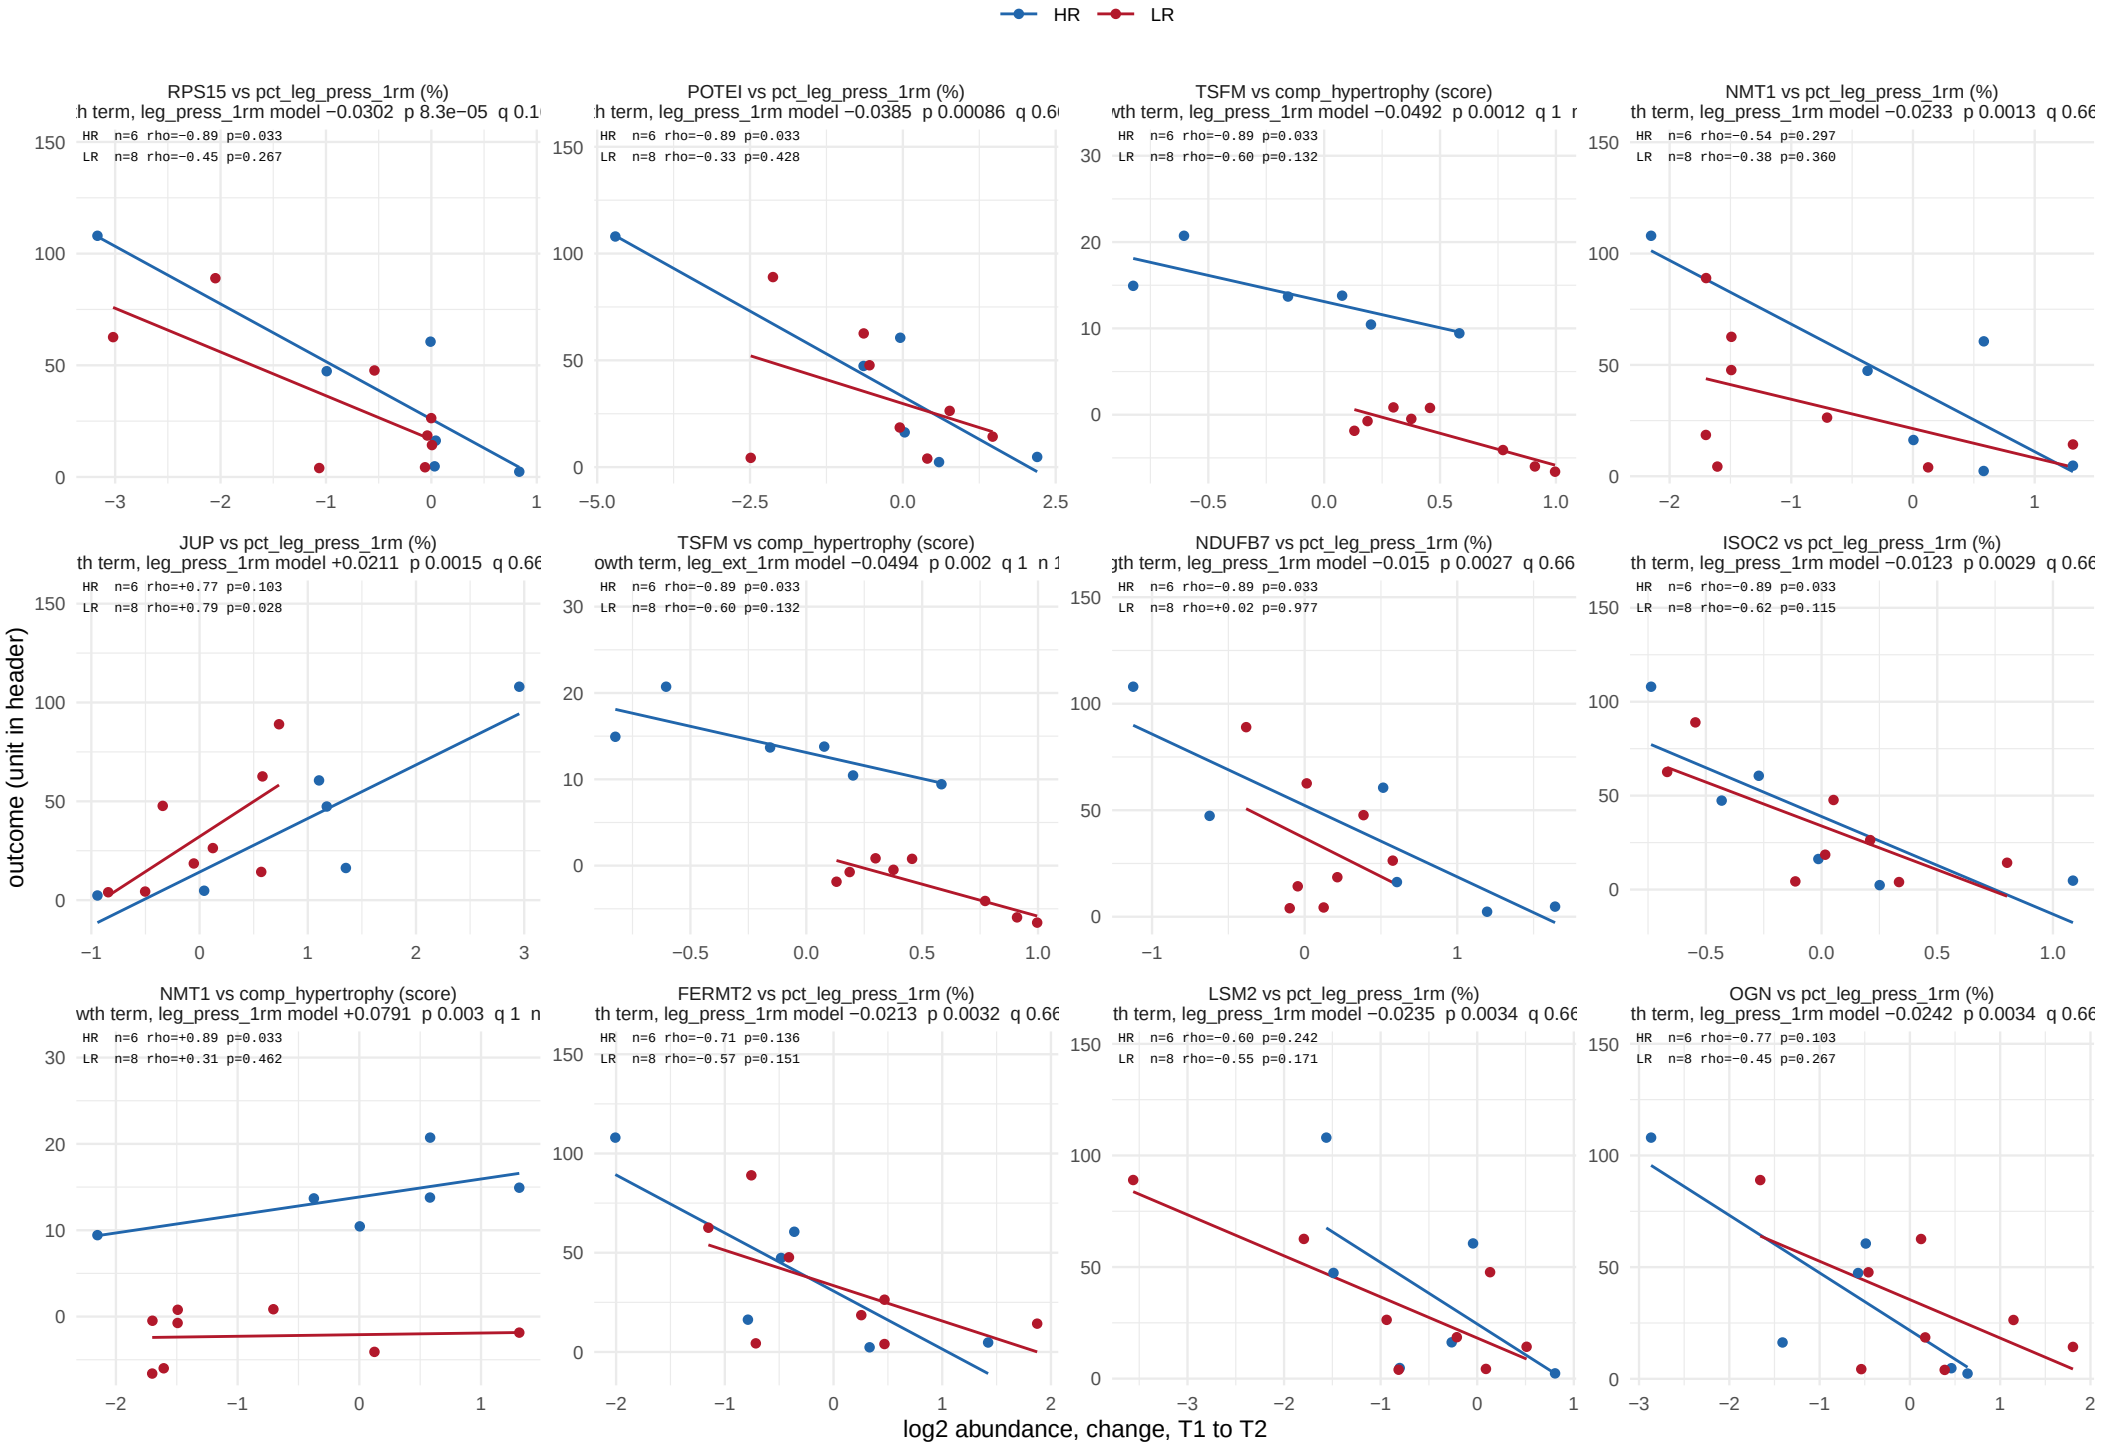

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, training window


311 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 2 of 26.

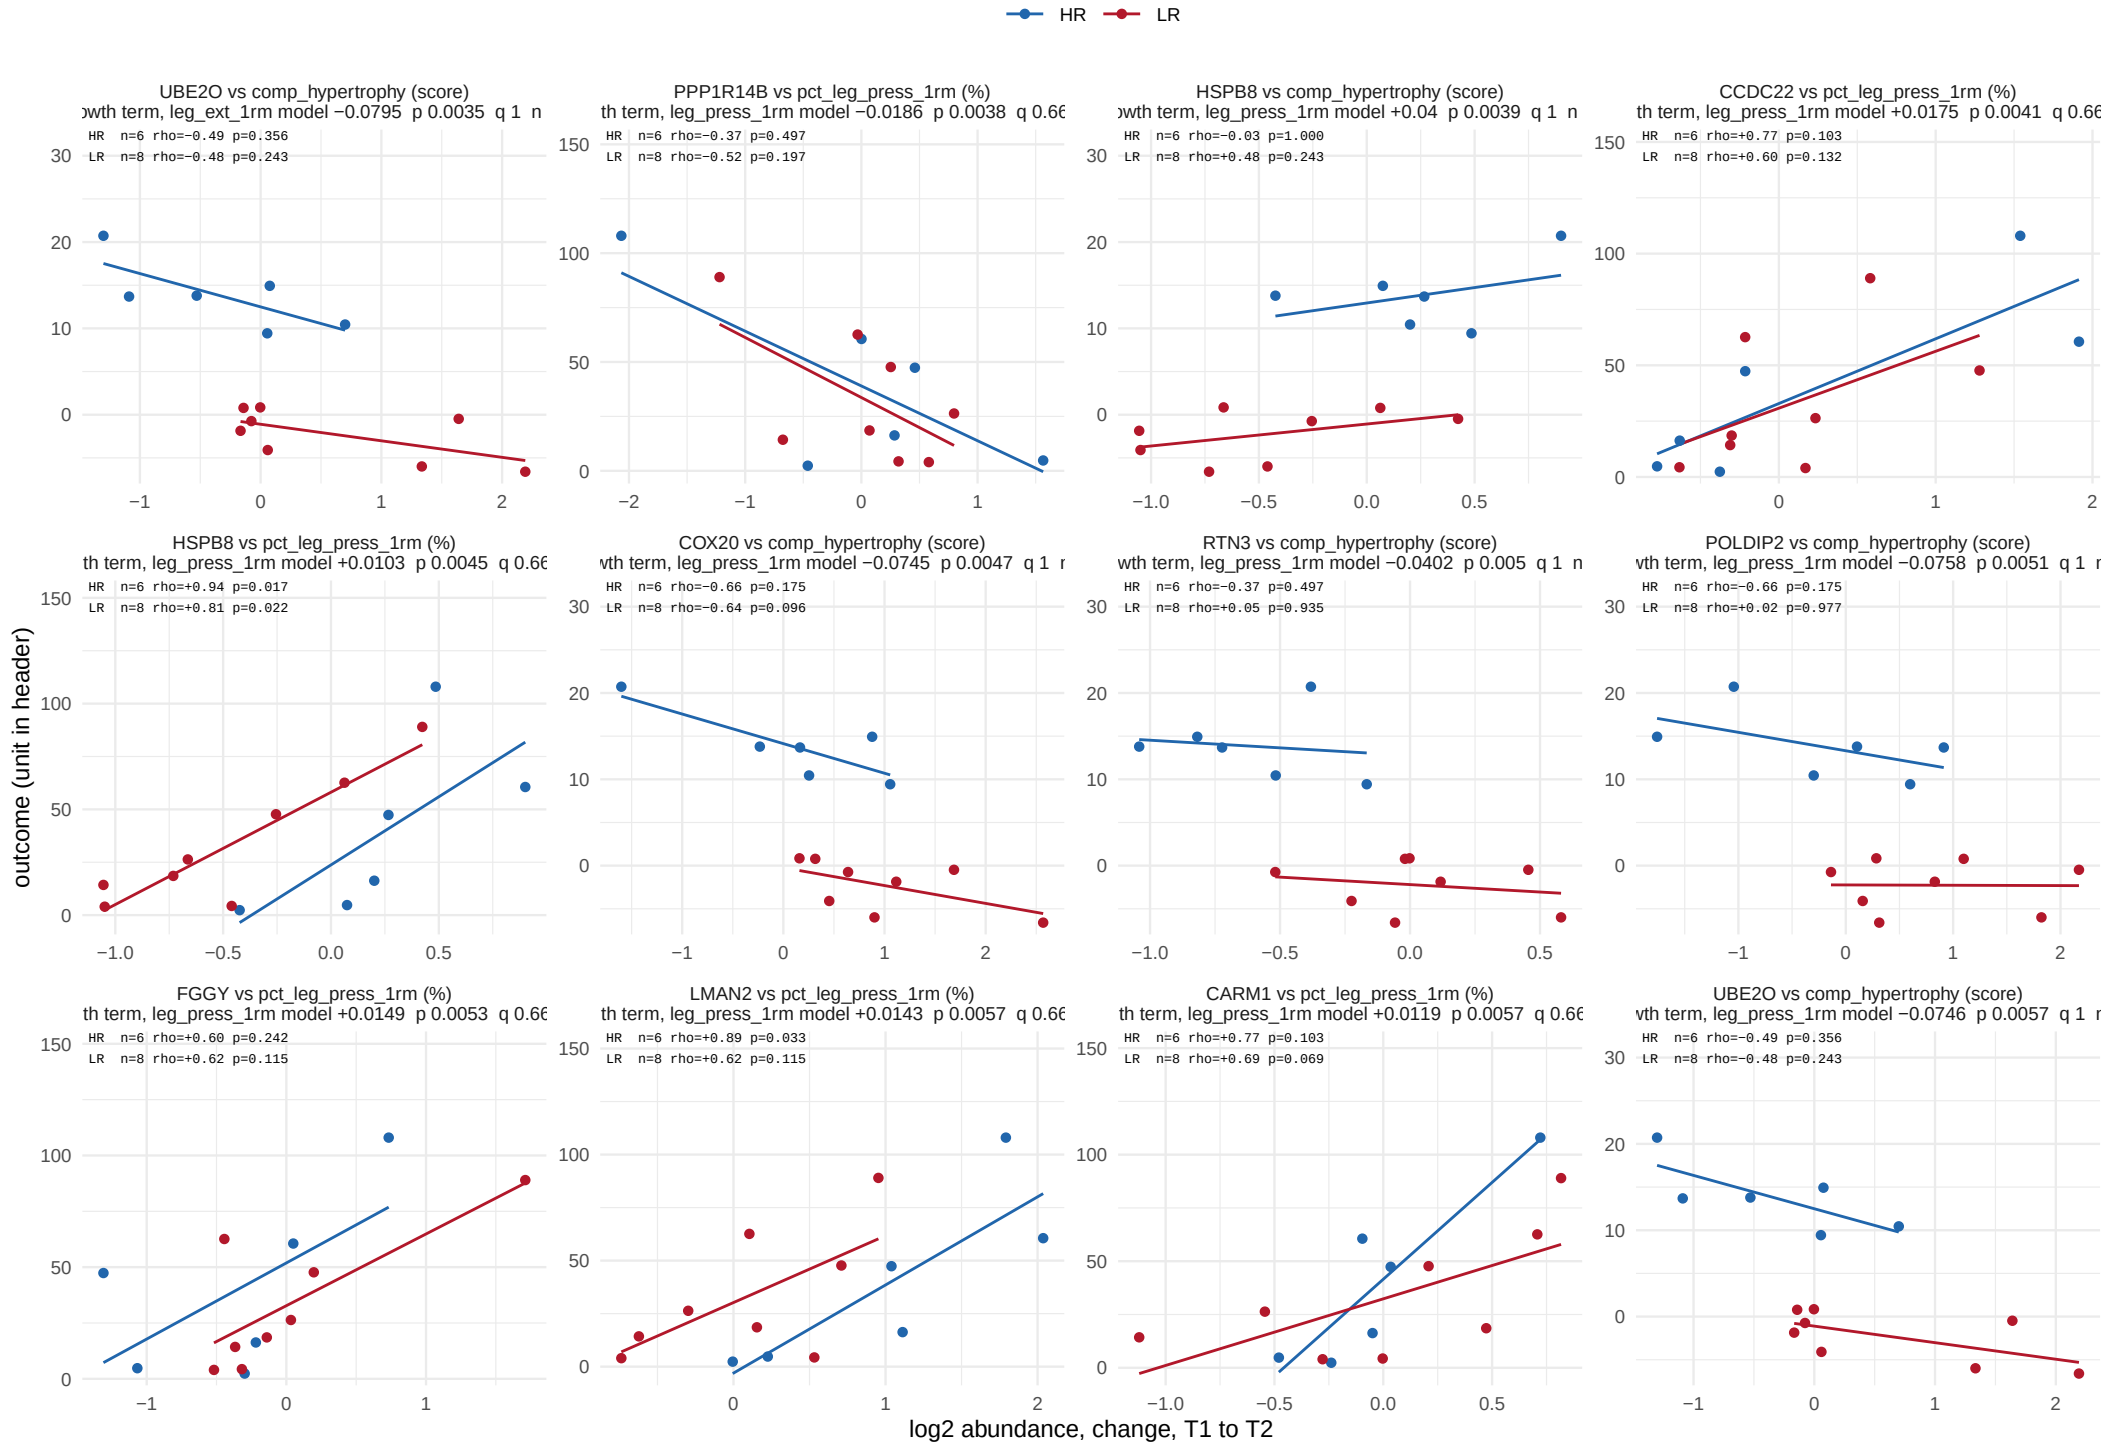

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, training window


311 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 3 of 26.

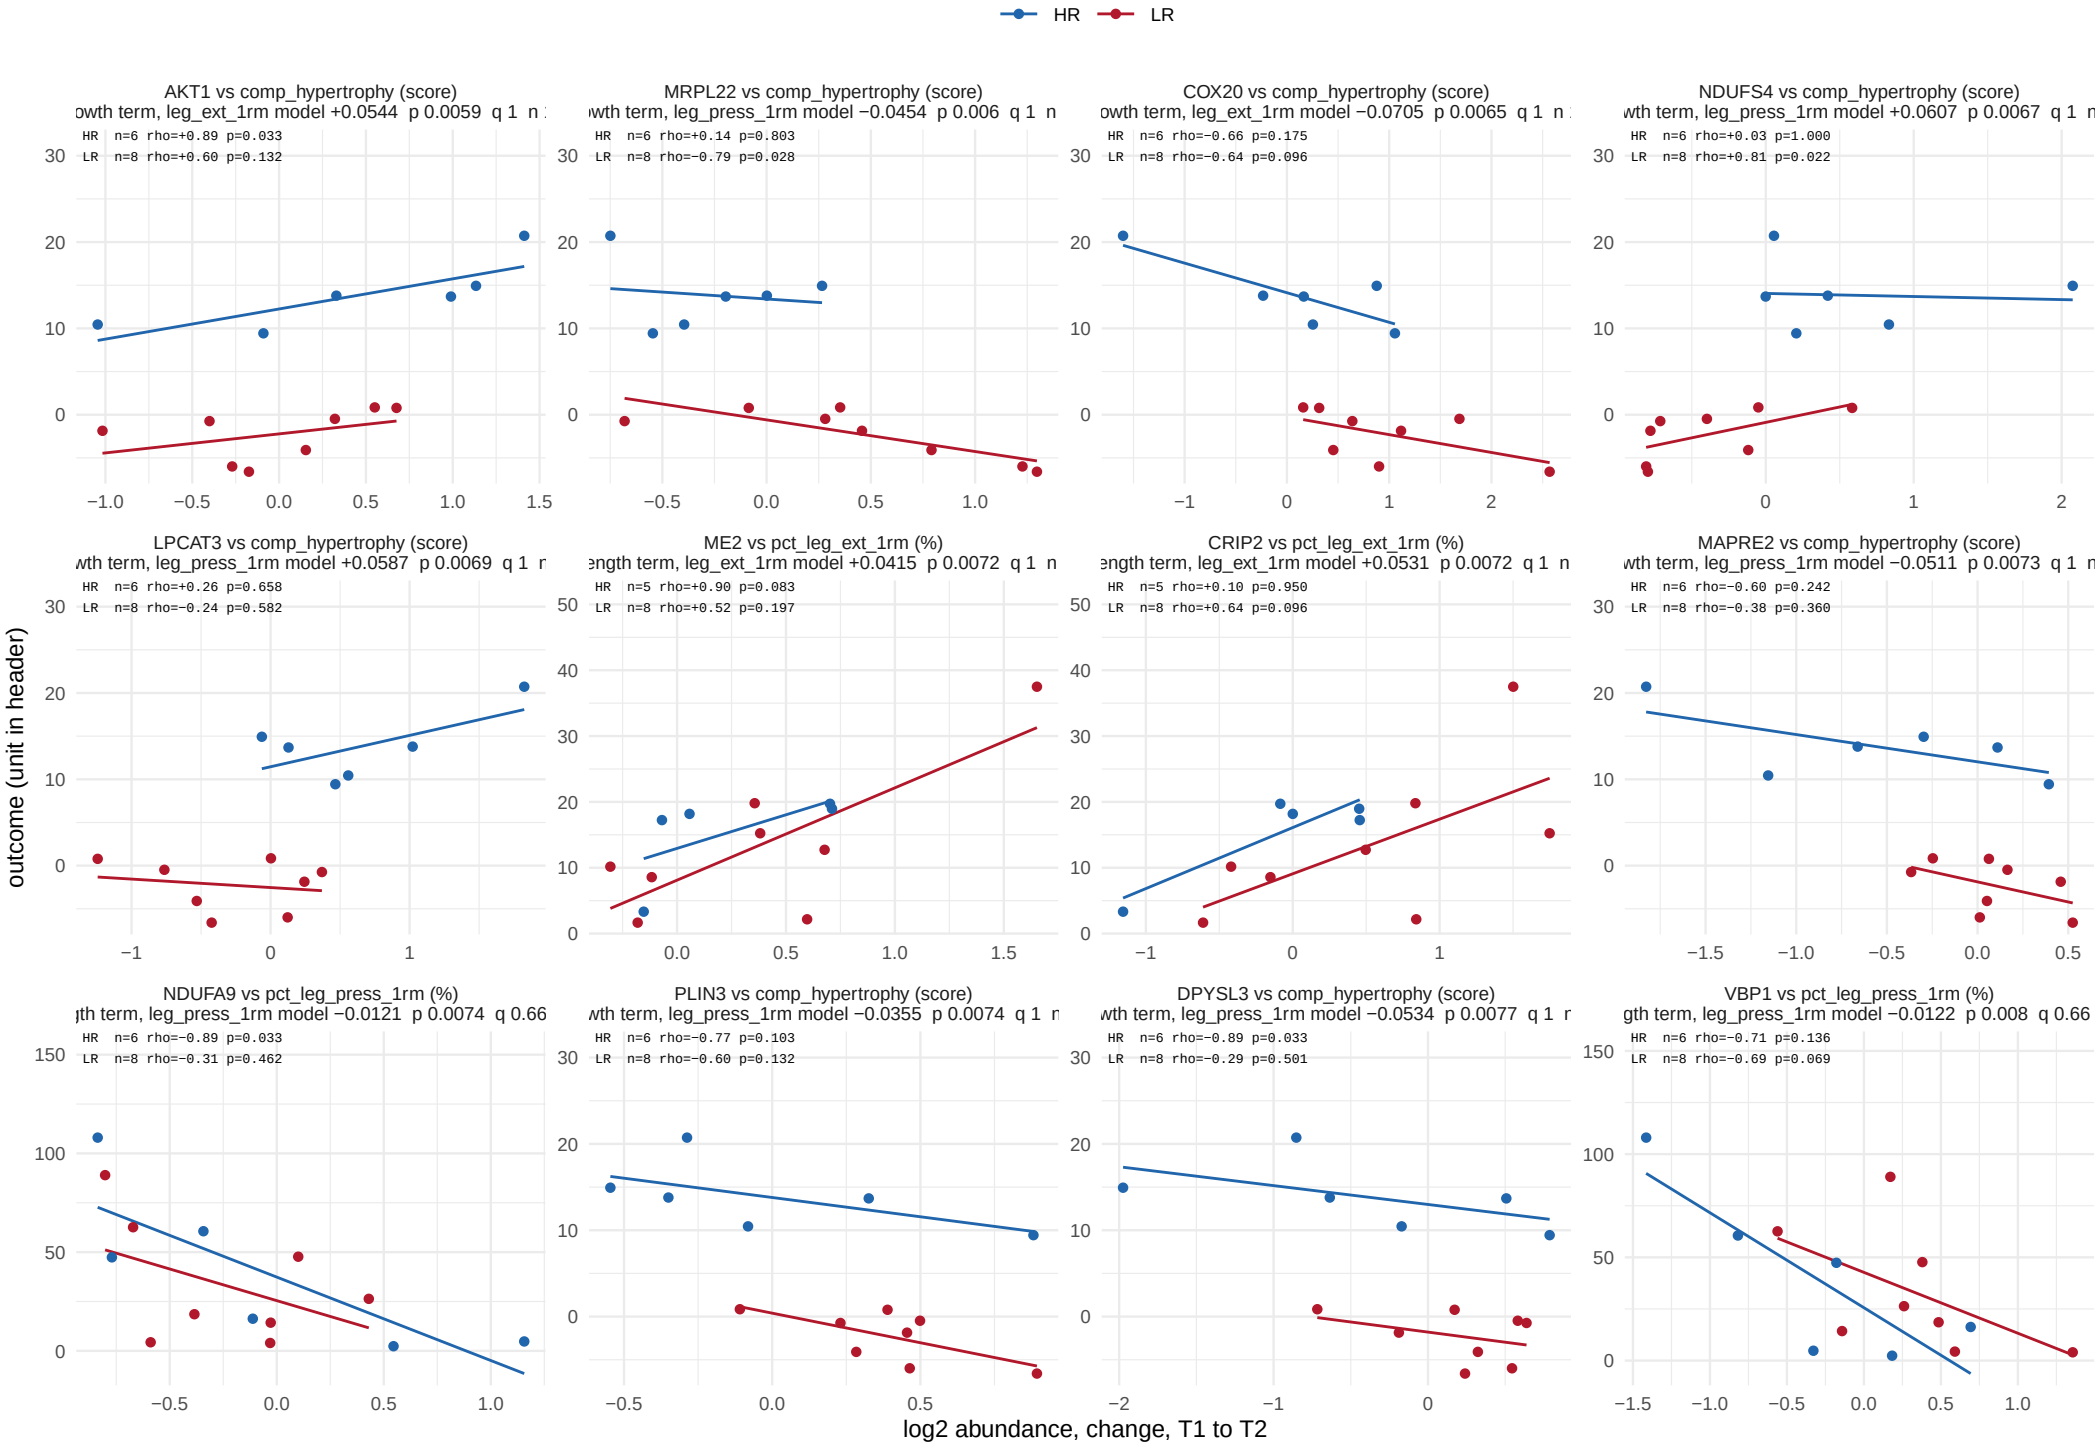

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, training window


311 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 4 of 26.

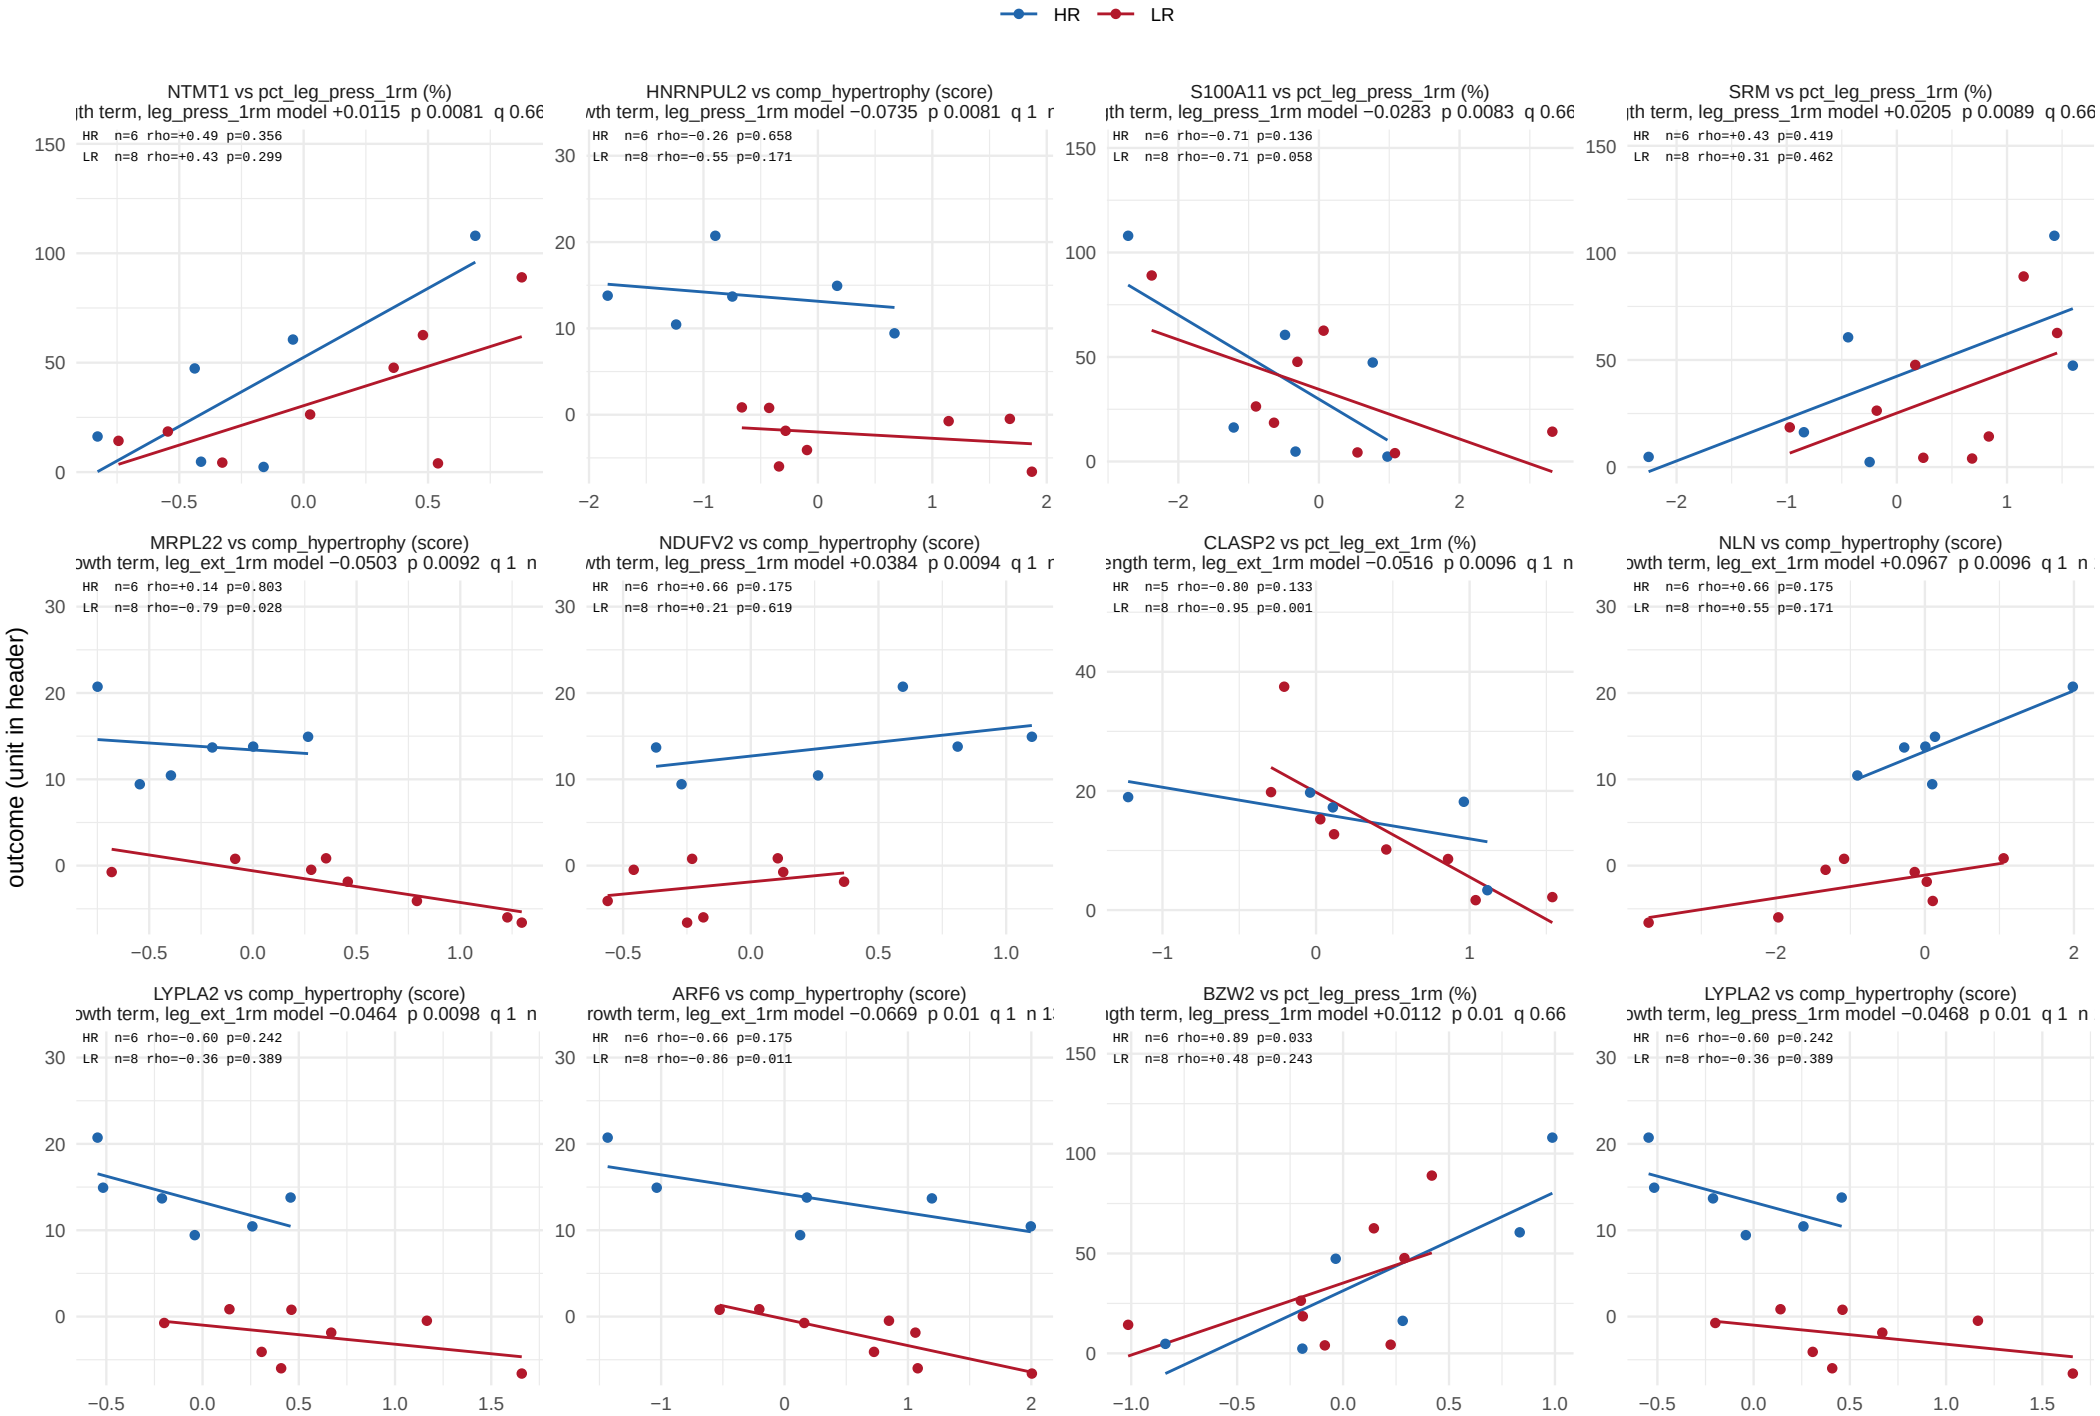

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, training window


311 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 5 of 26.

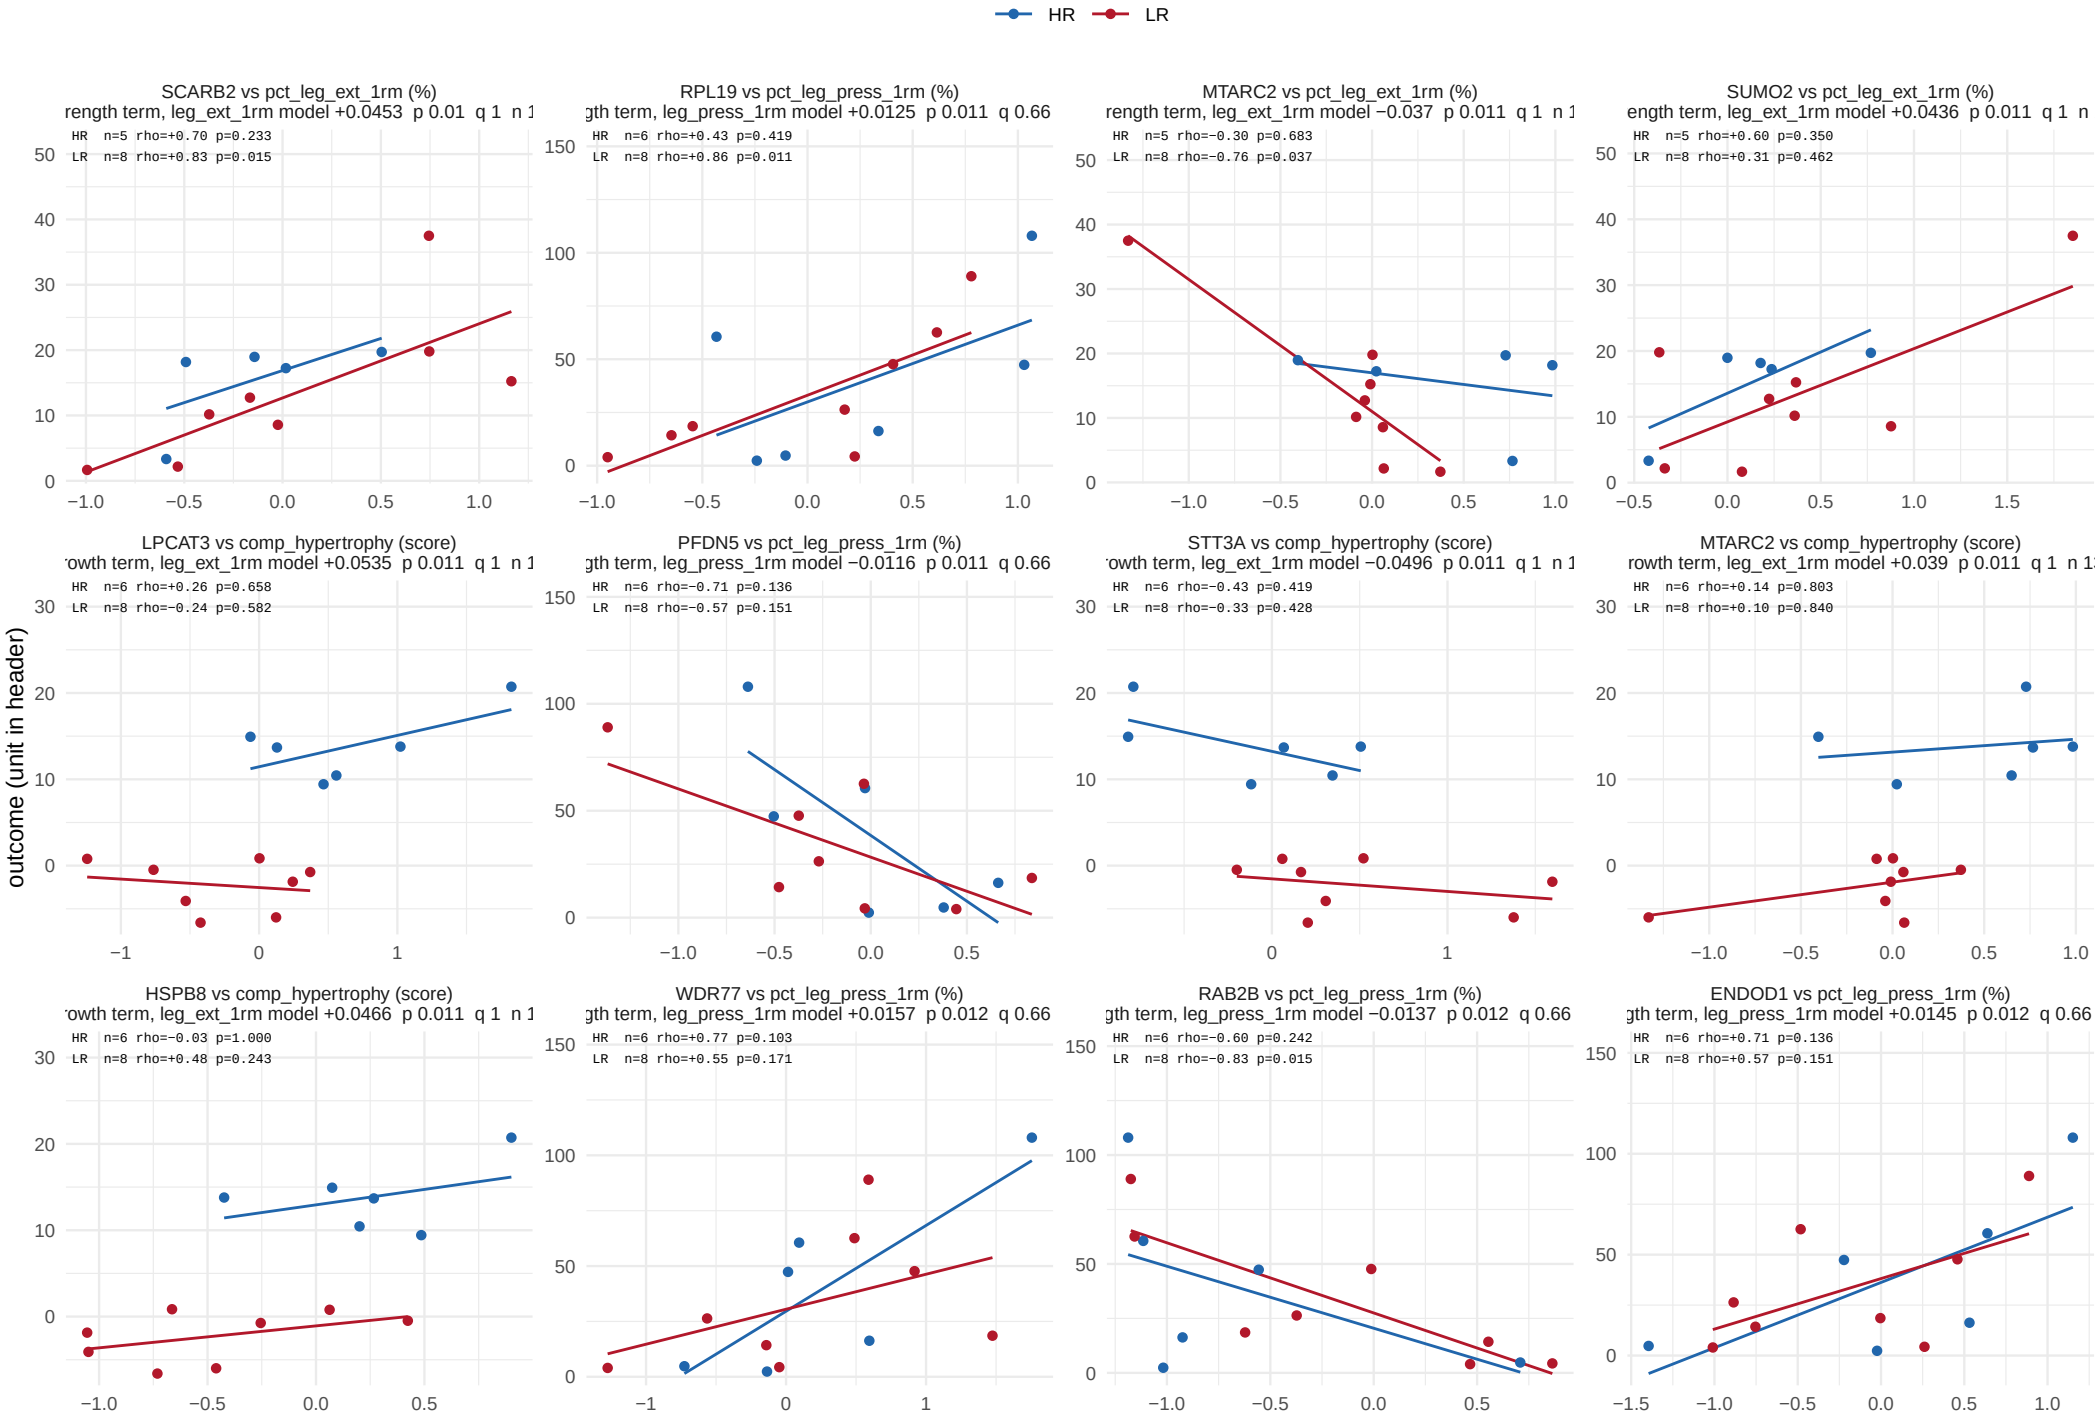

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, training window


311 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 6 of 26.

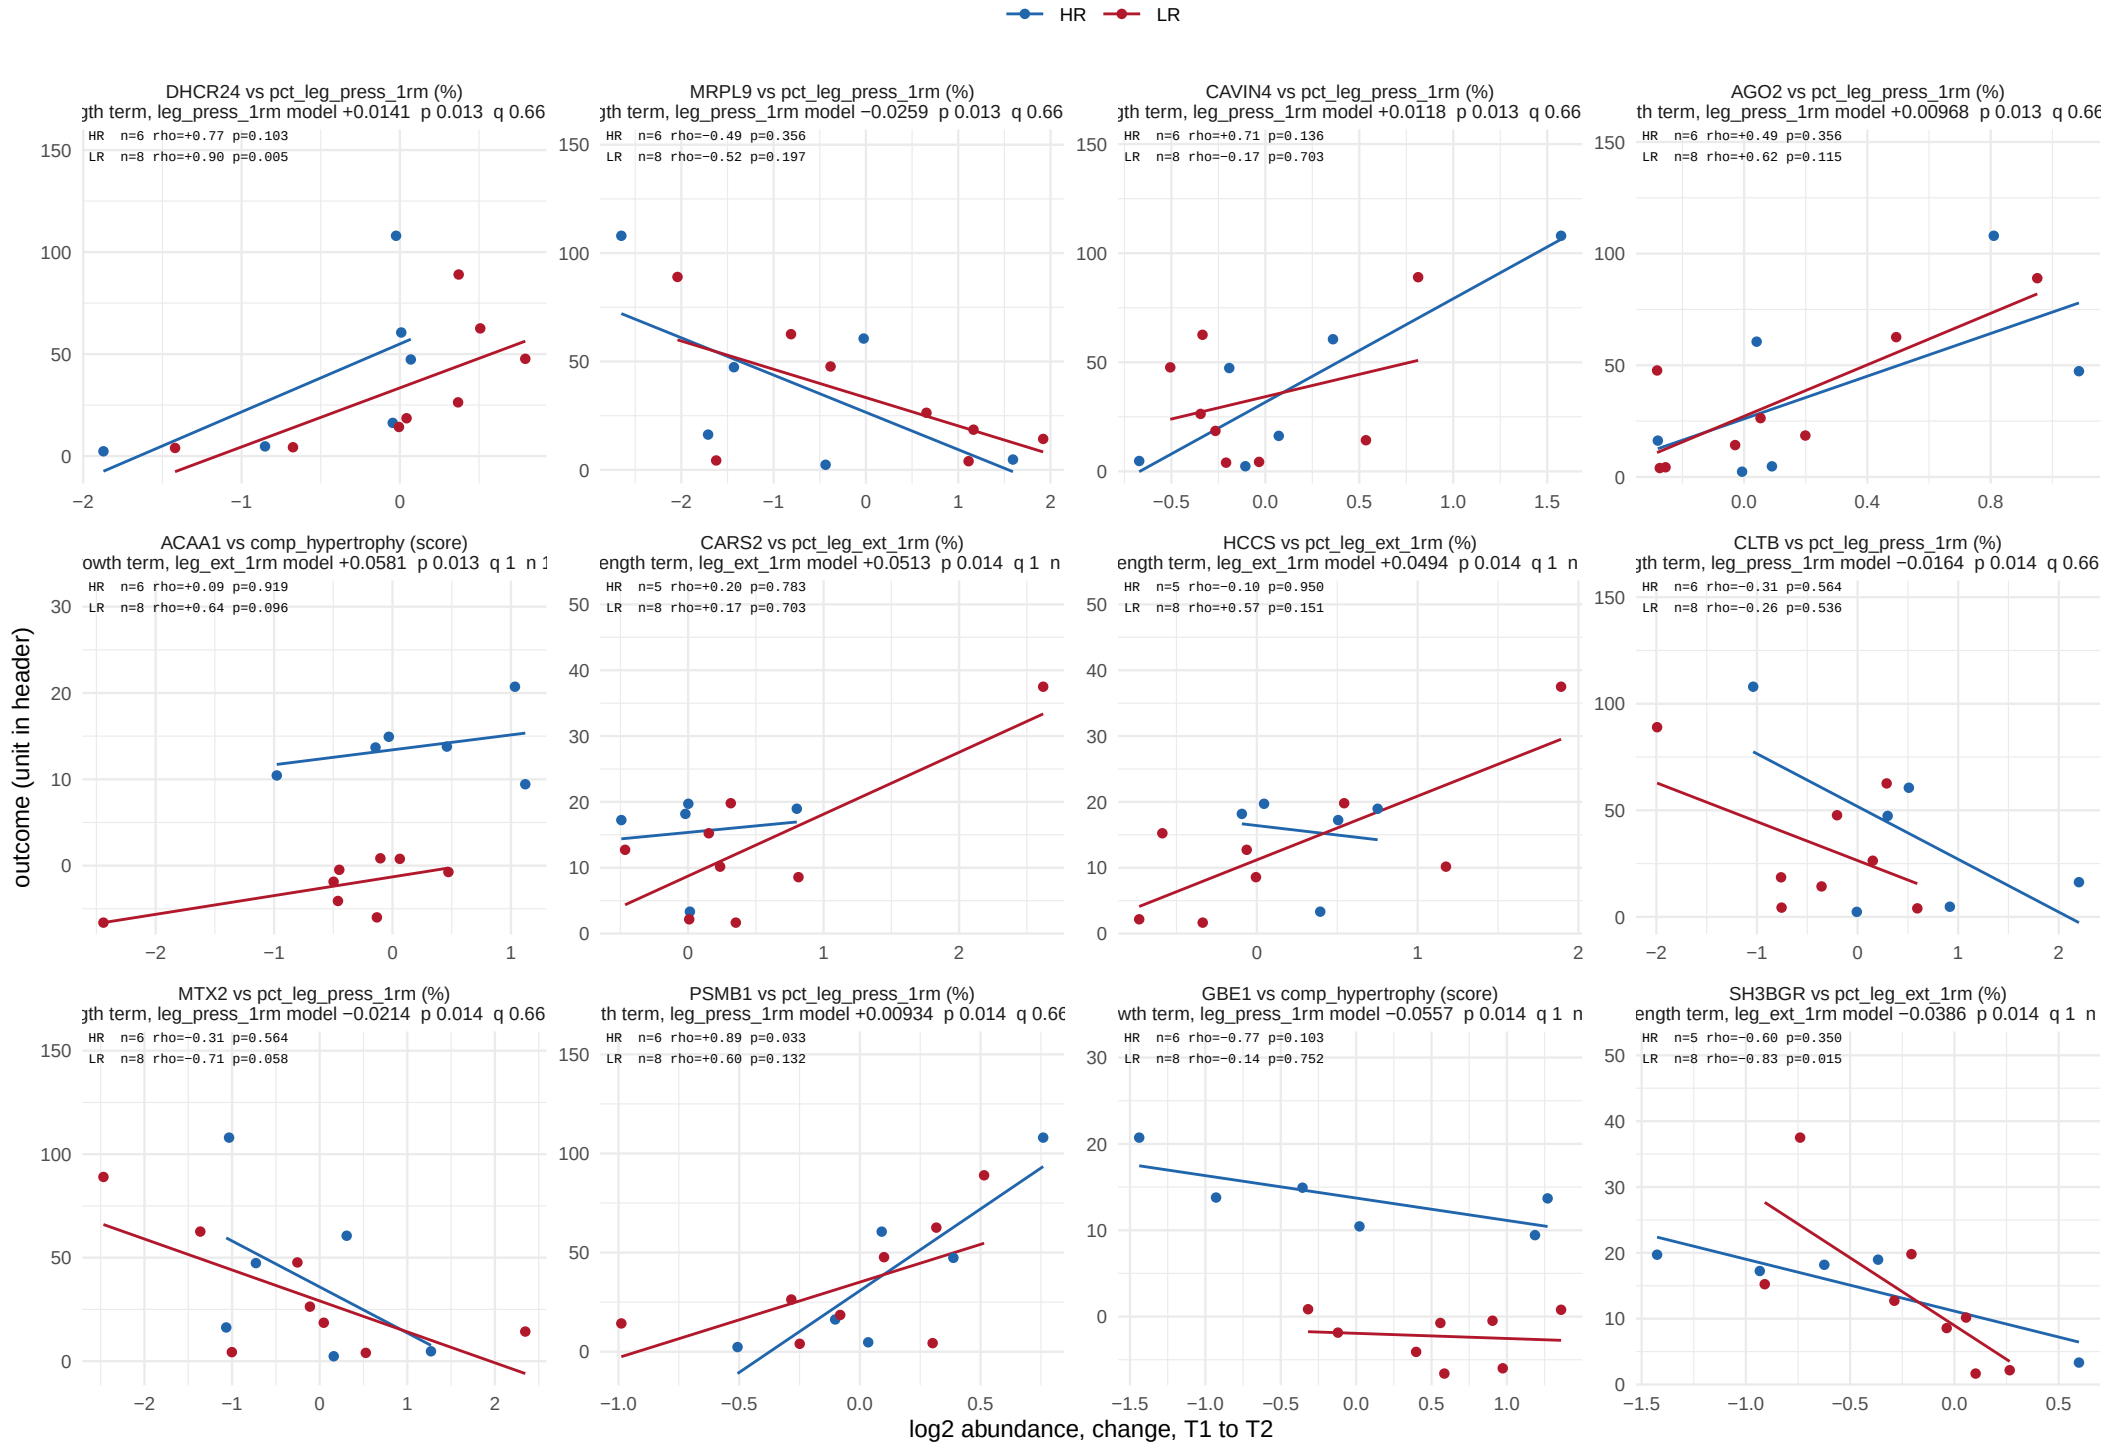

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, training window


311 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 7 of 26.

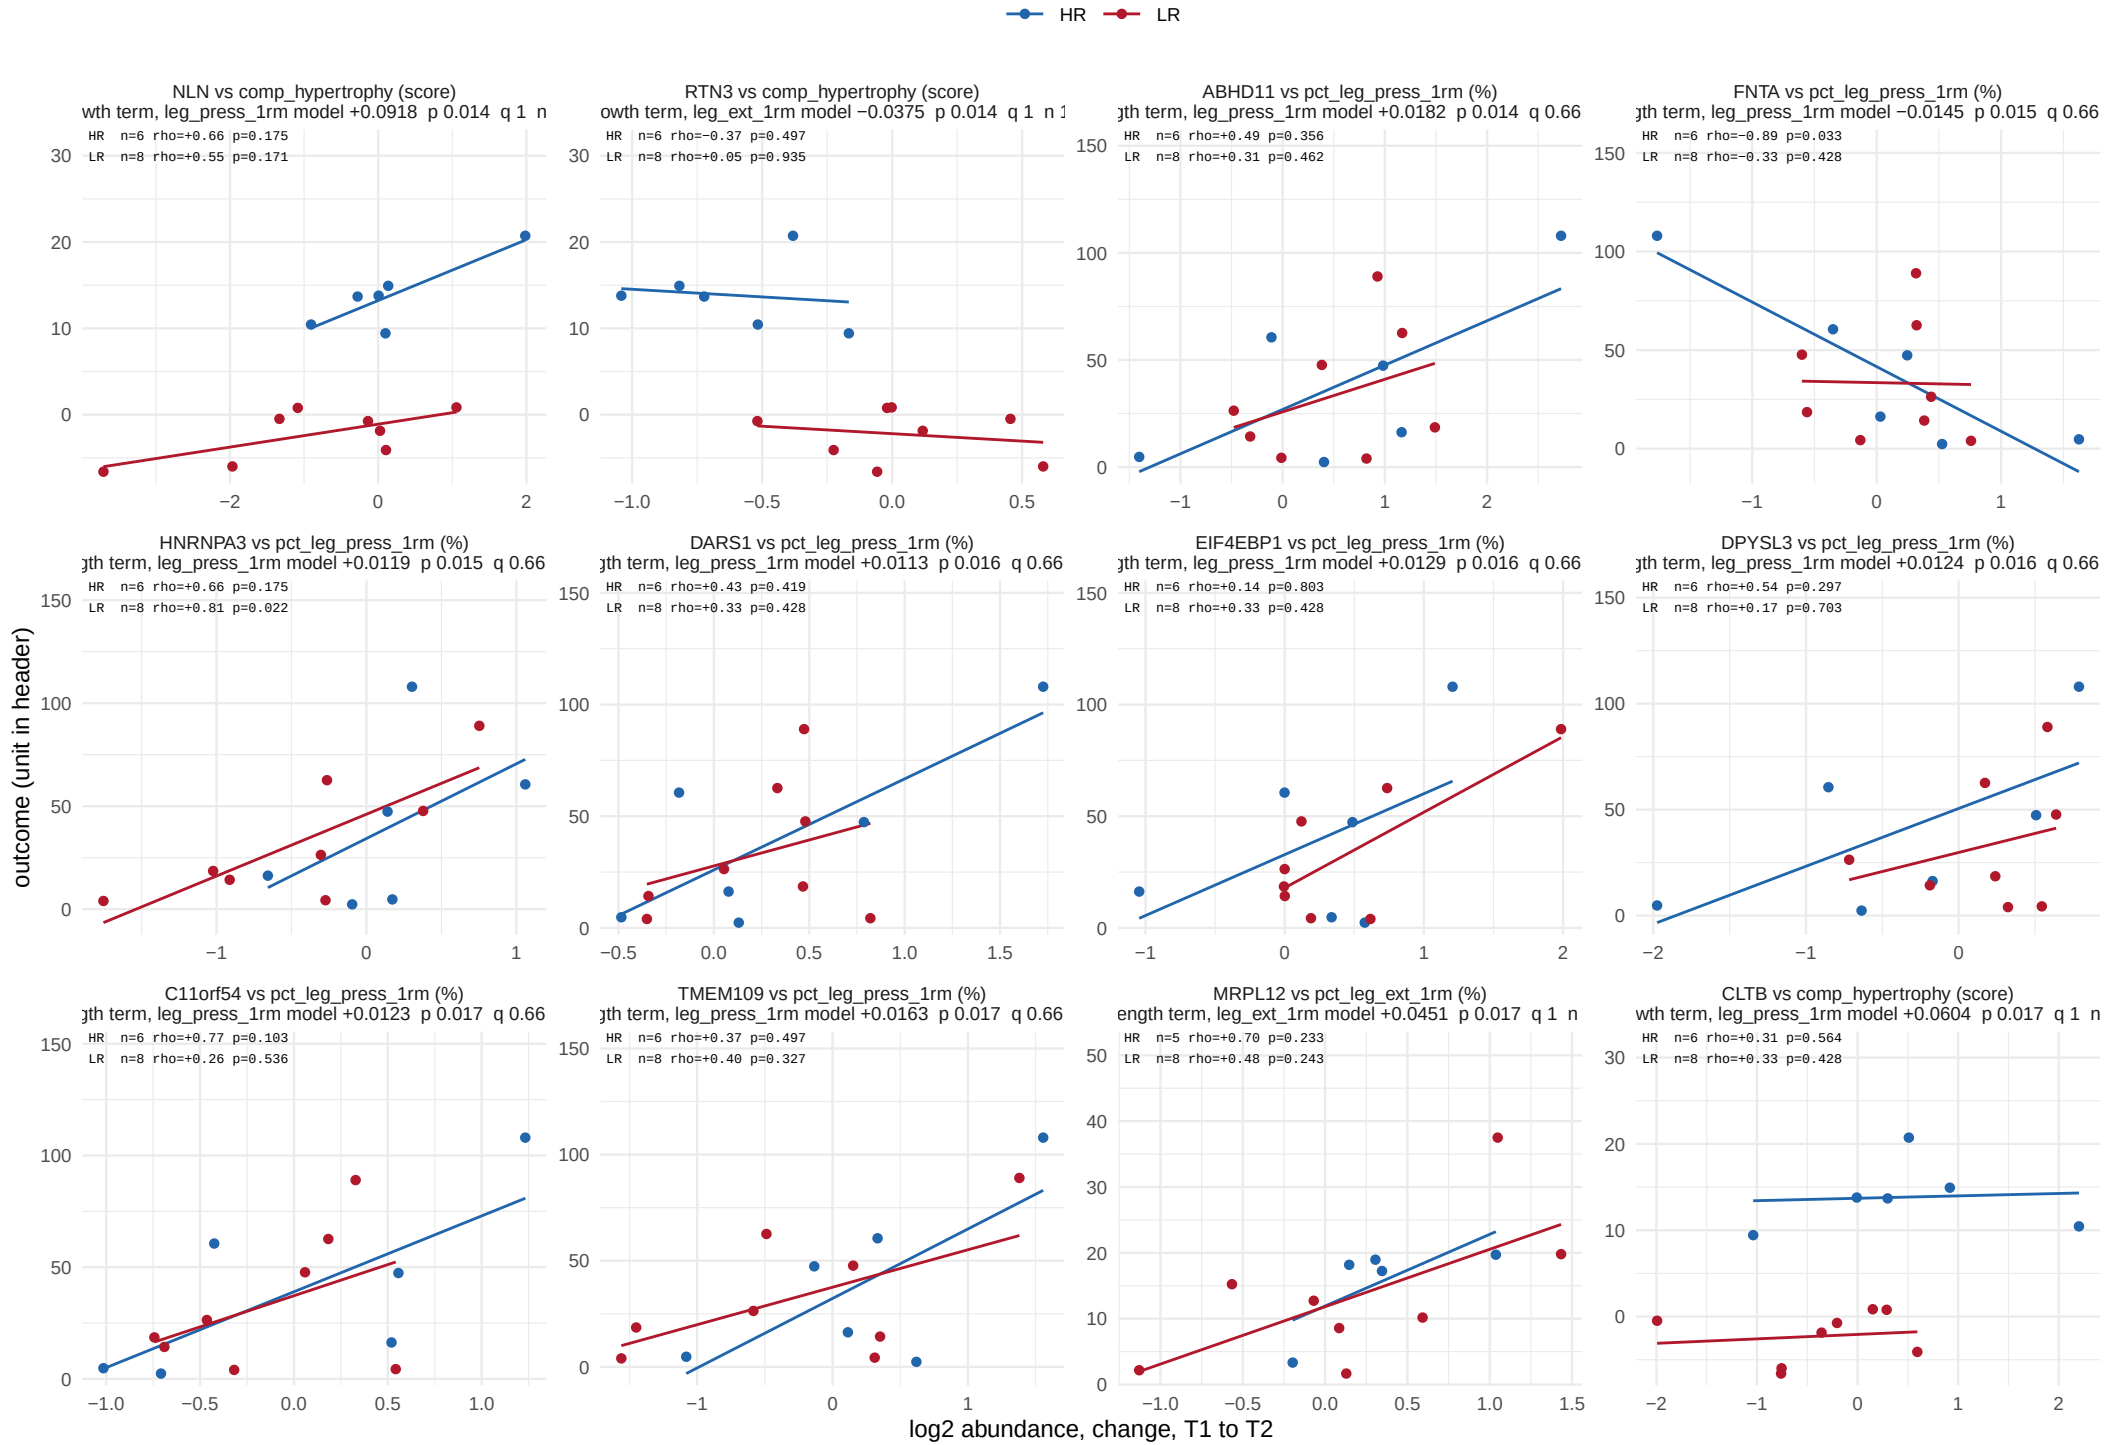

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, training window


311 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 8 of 26.

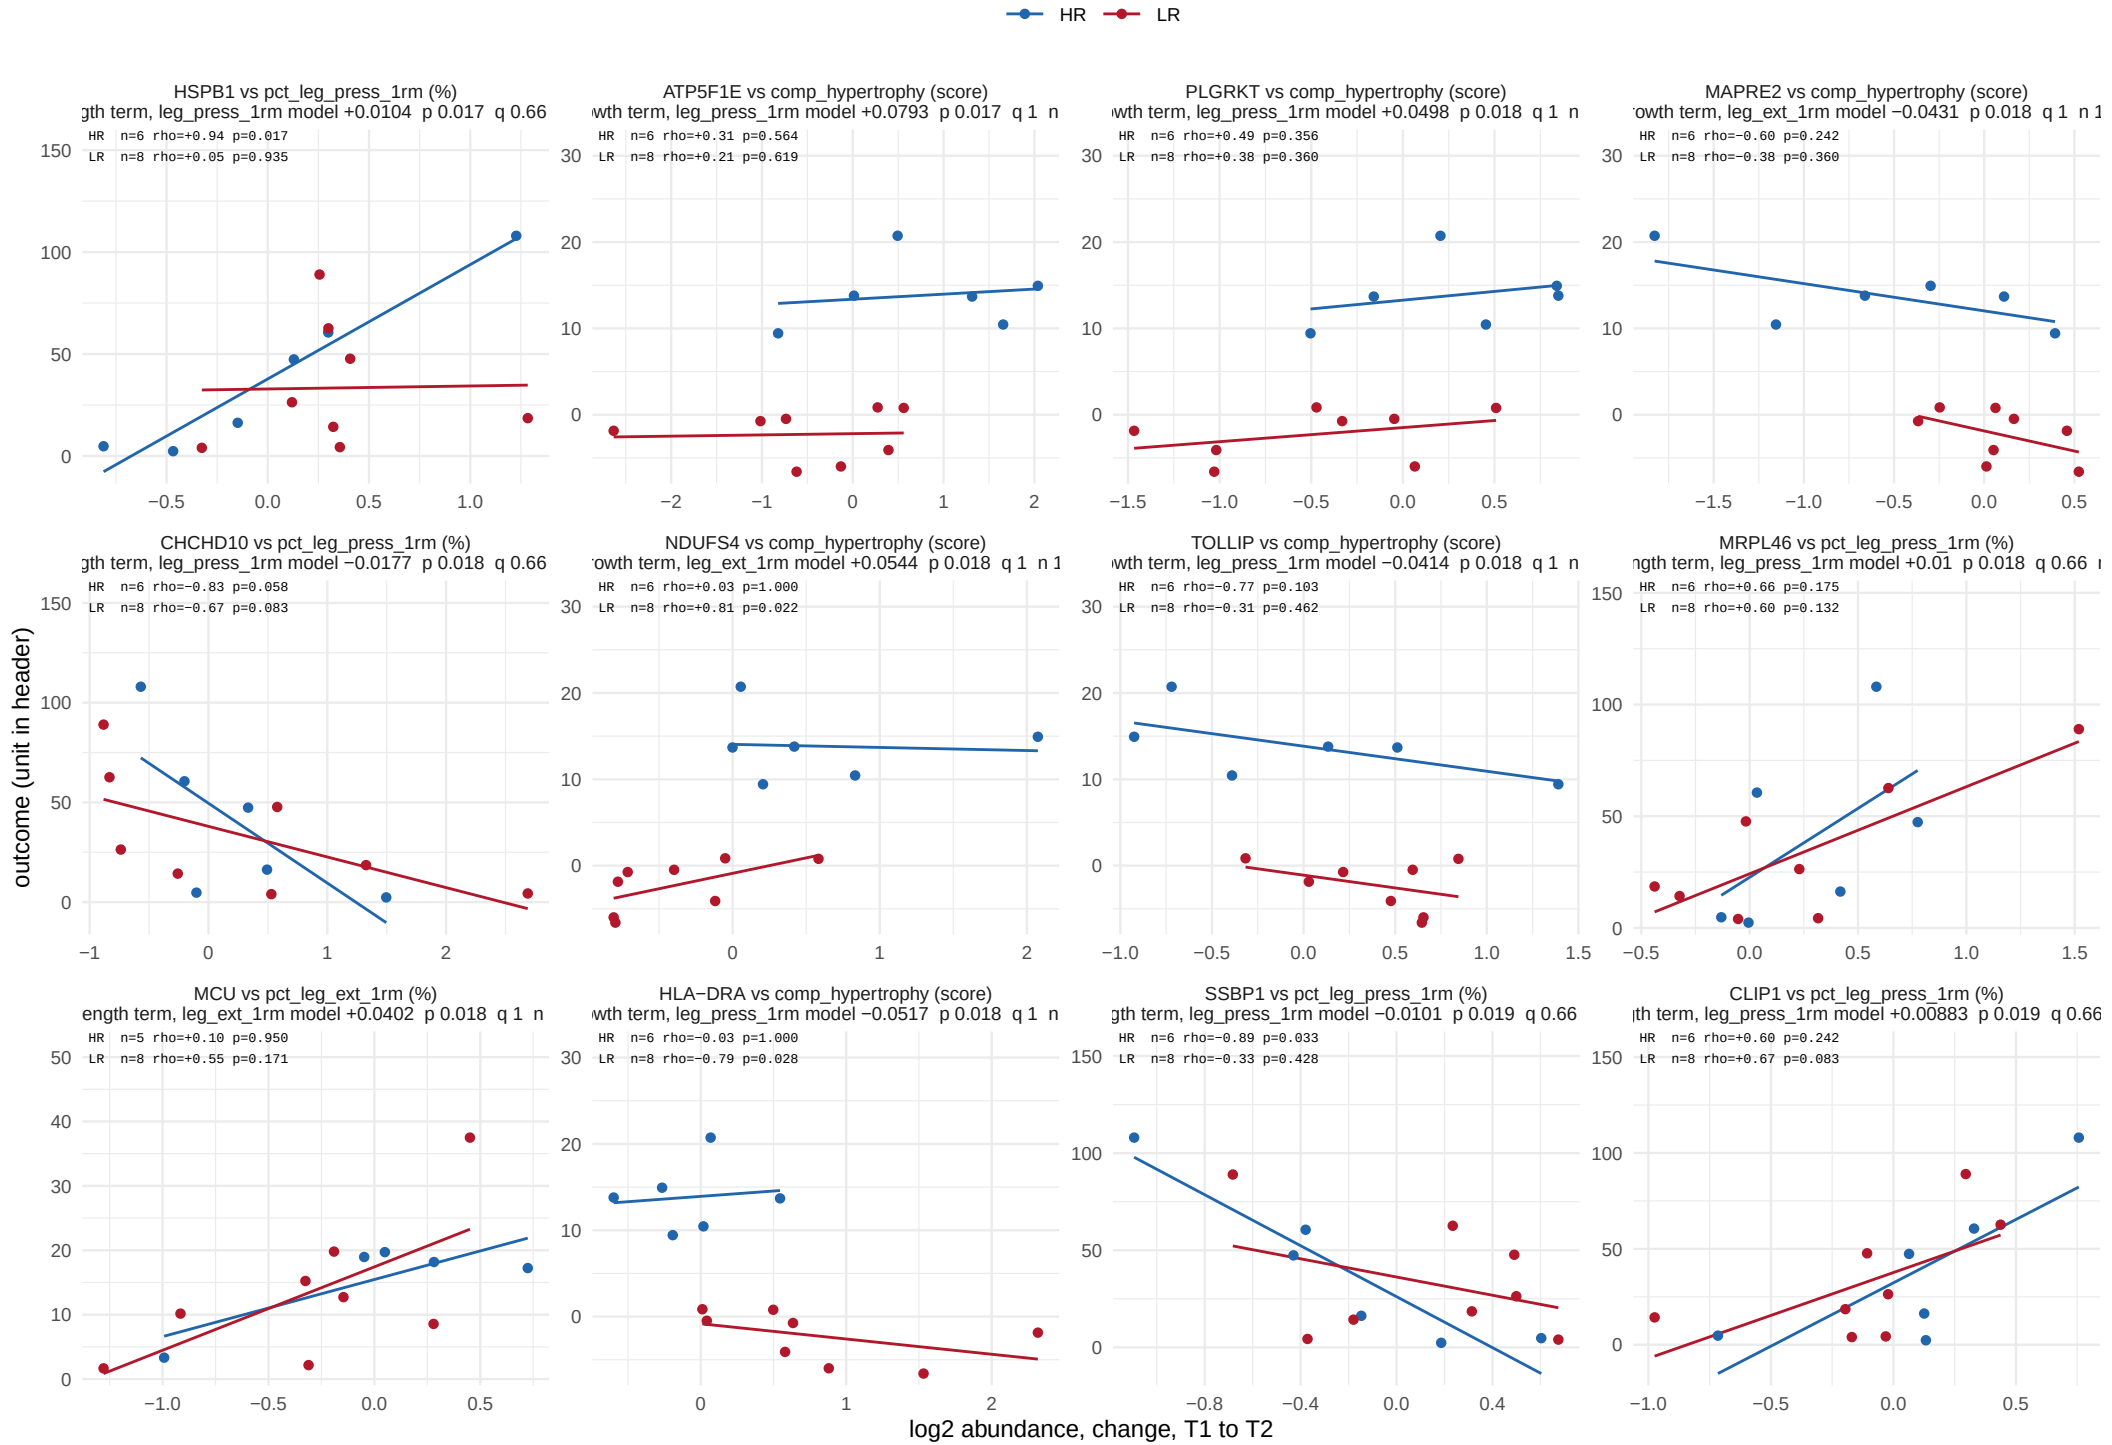

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, training window


311 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 9 of 26.

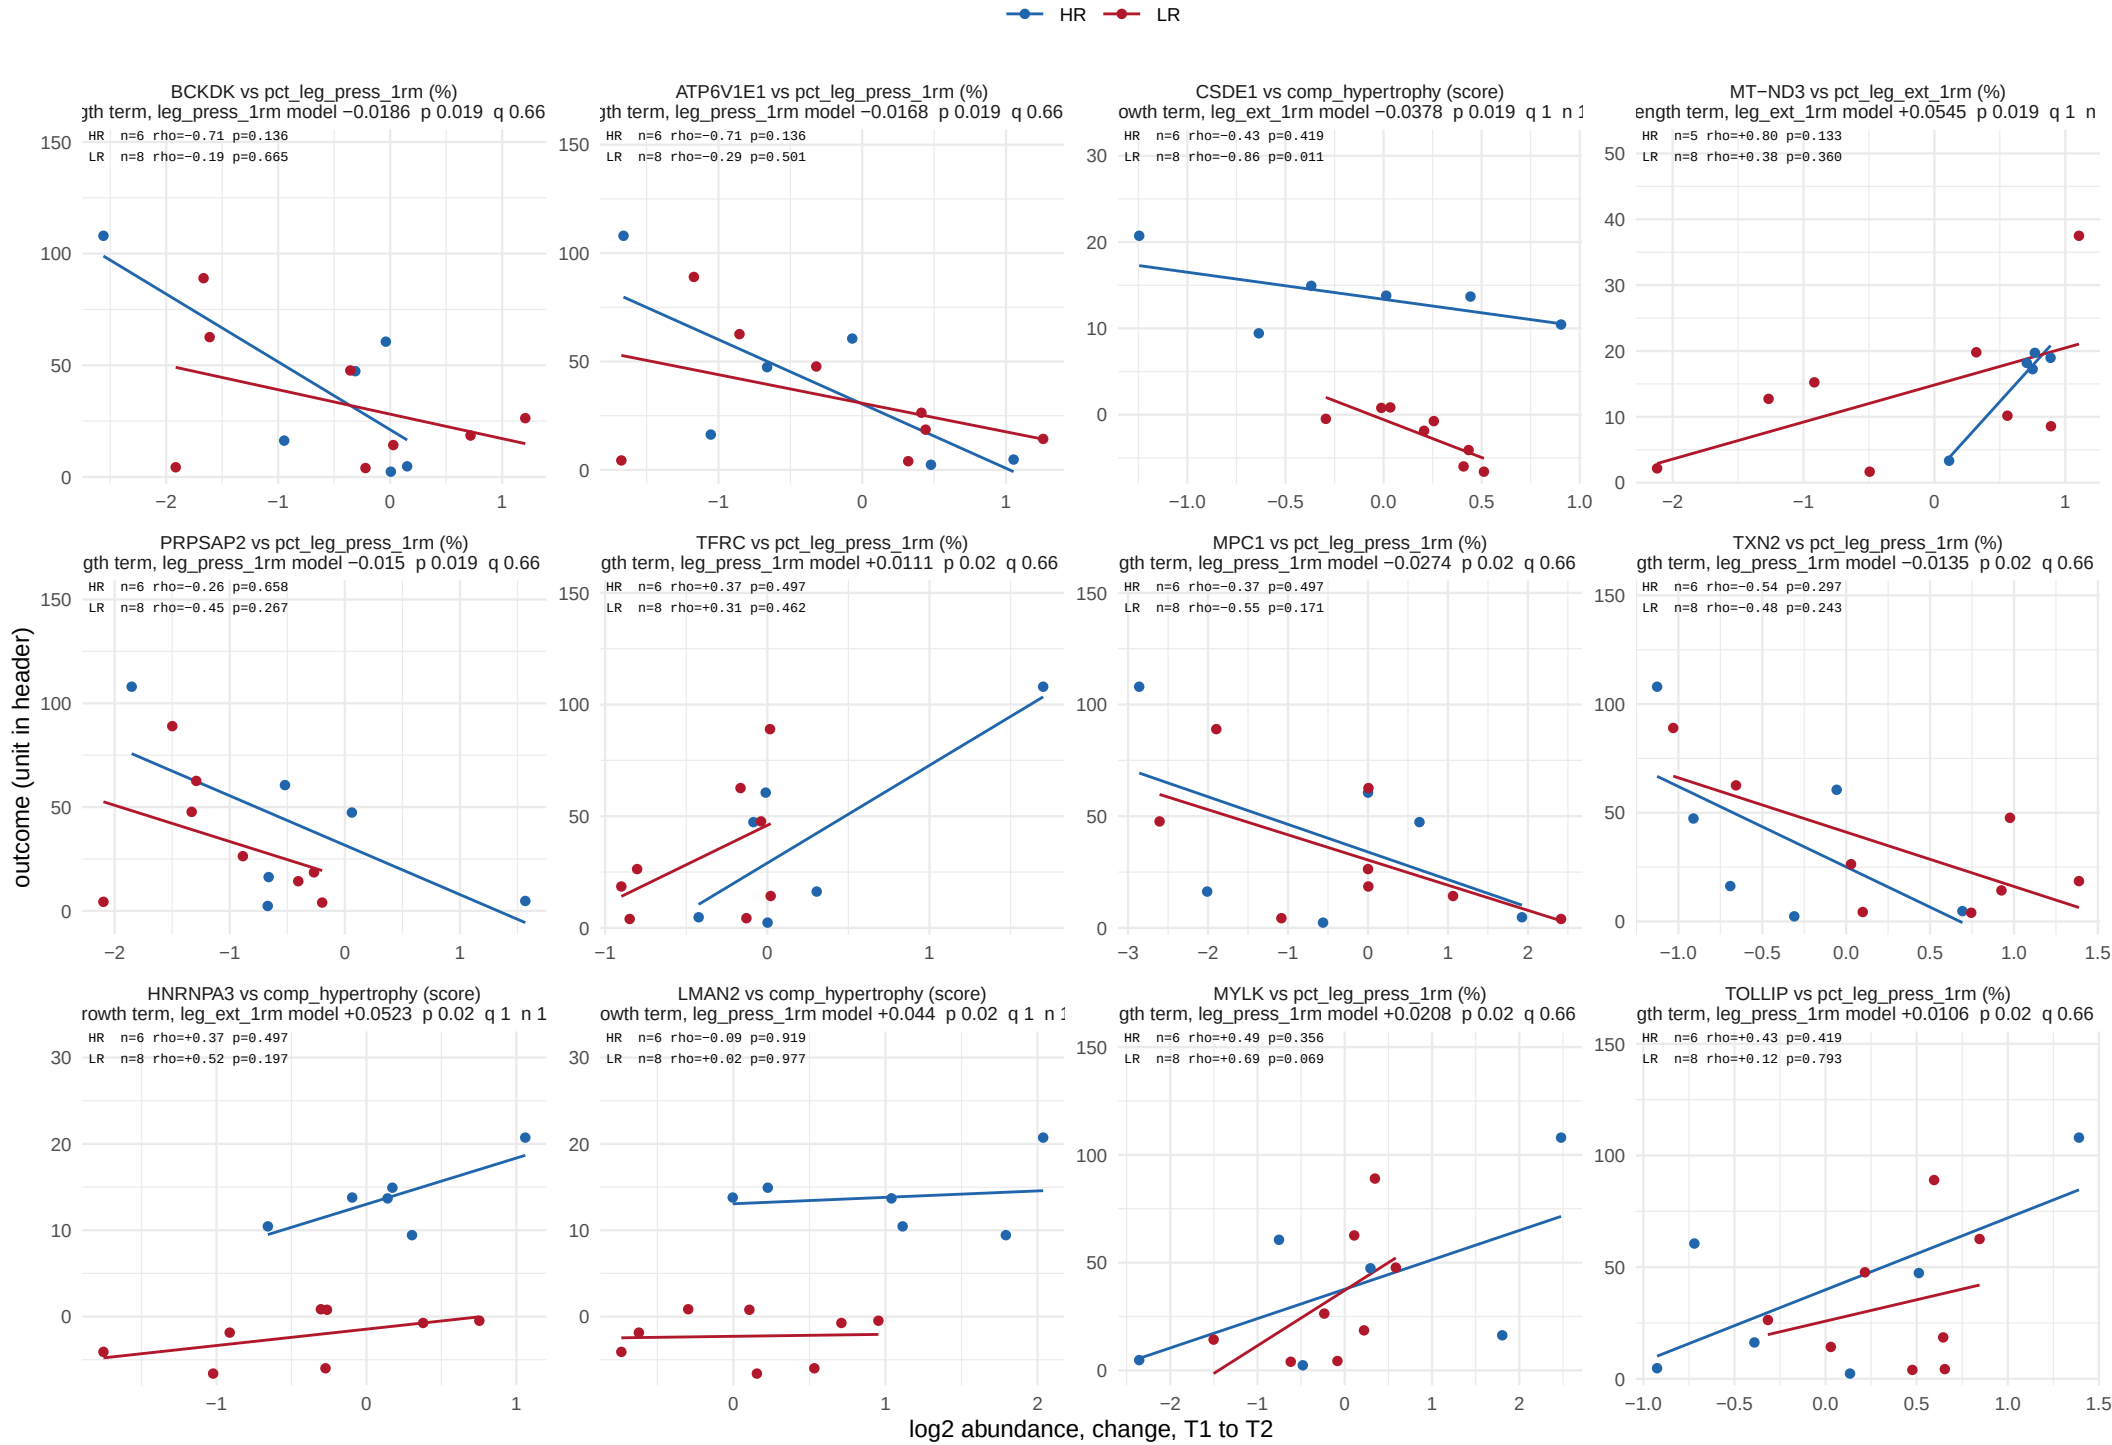

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, training window


311 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 10 of 26.

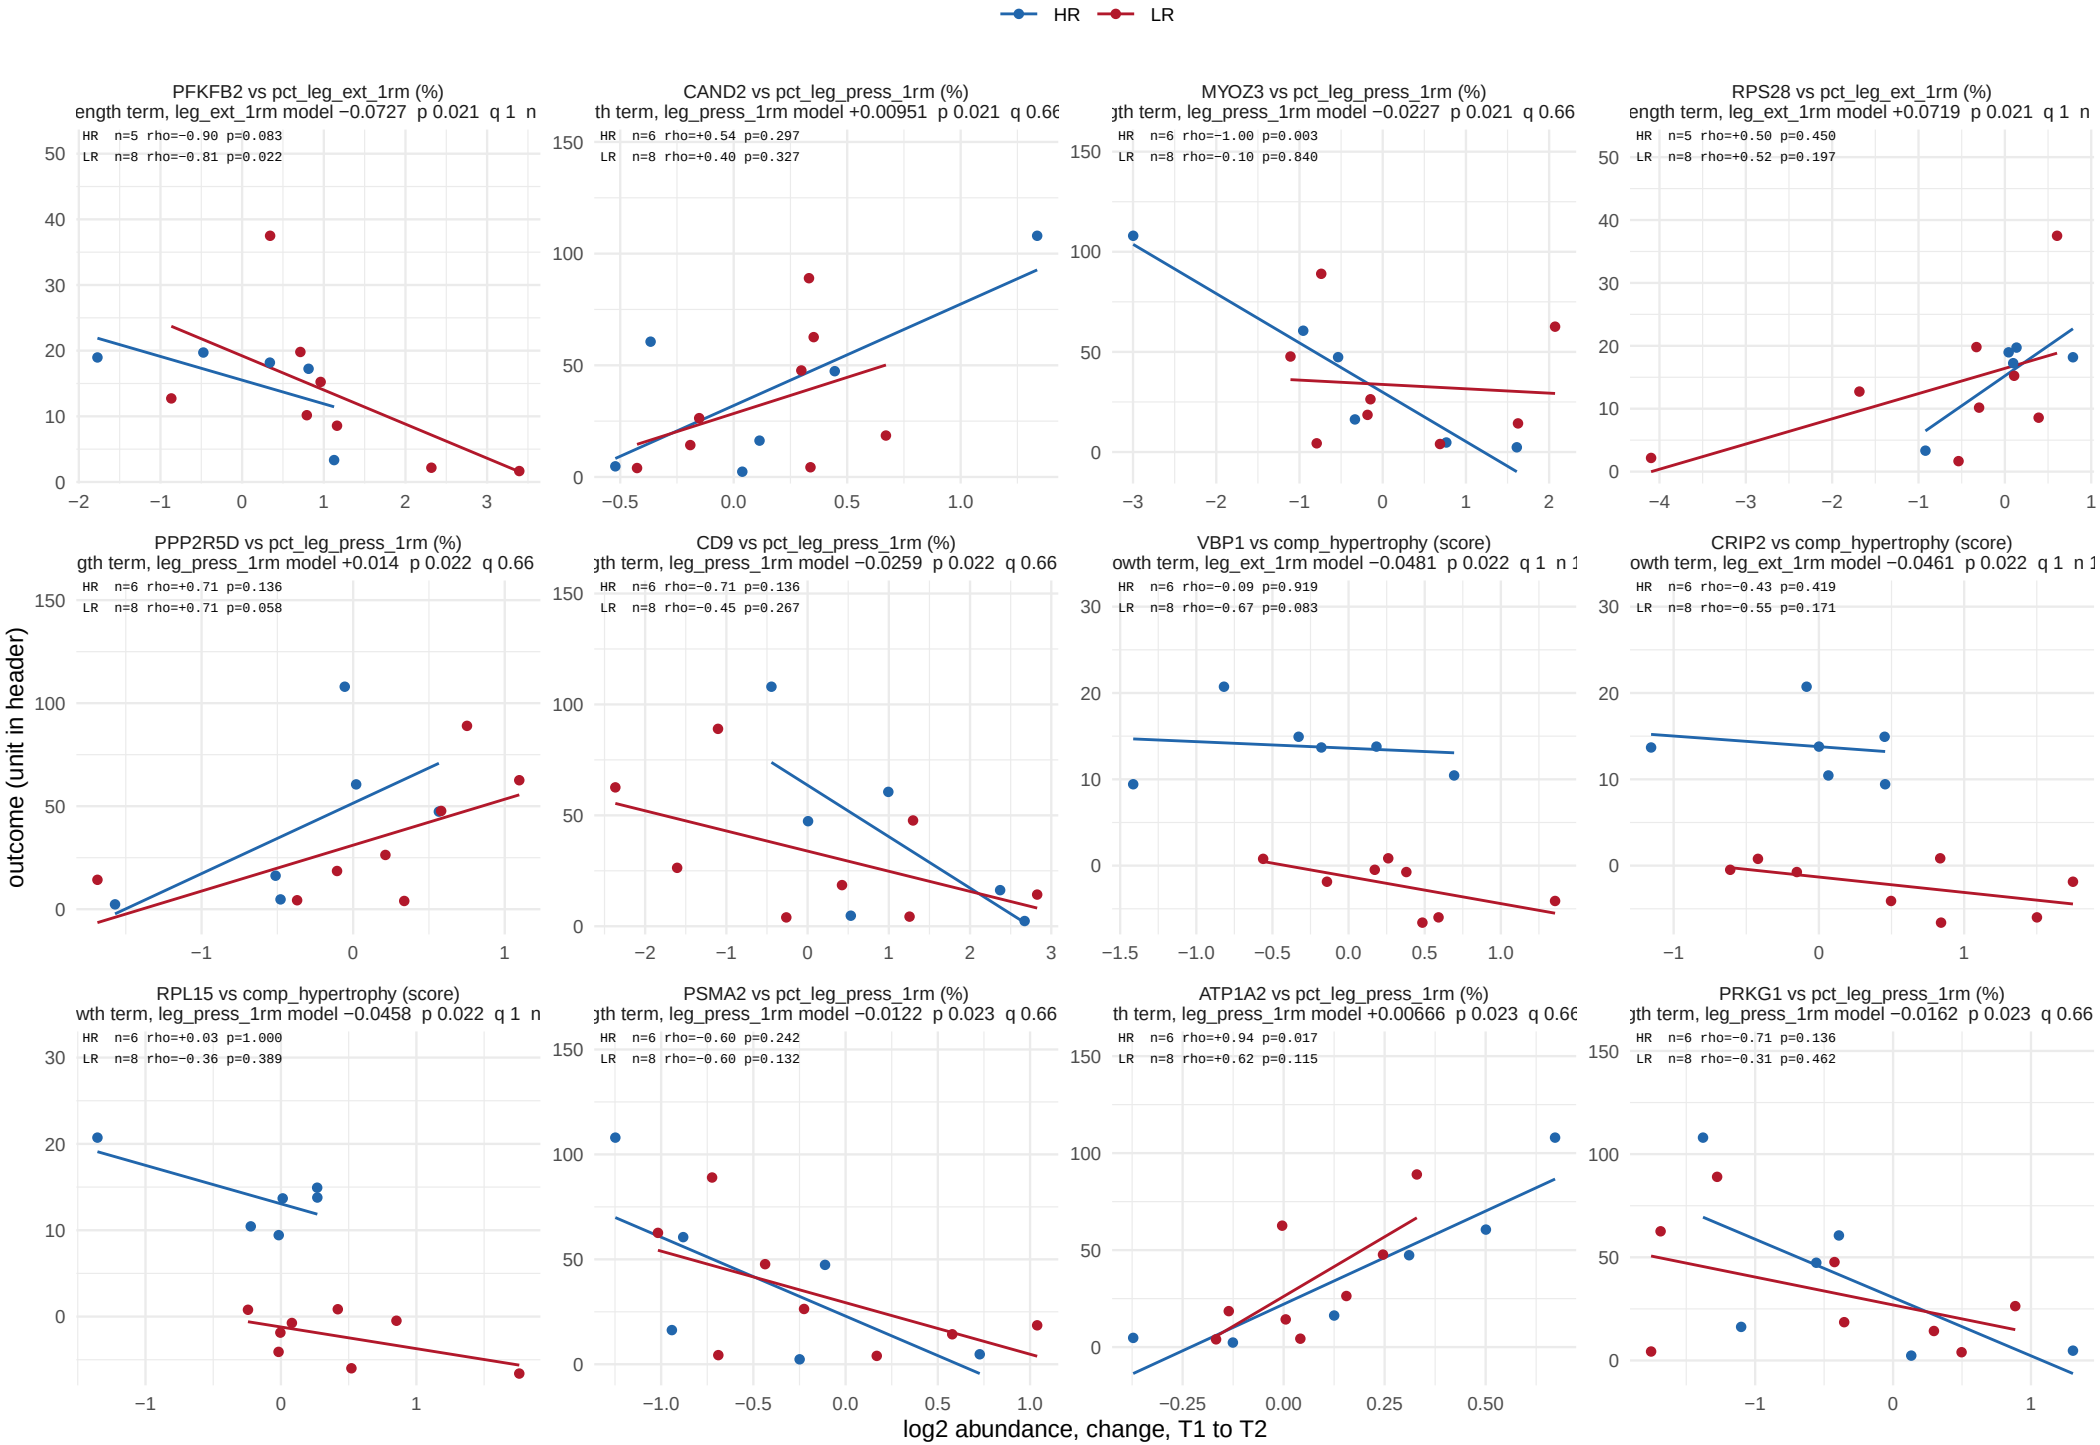

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, training window


311 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 11 of 26.

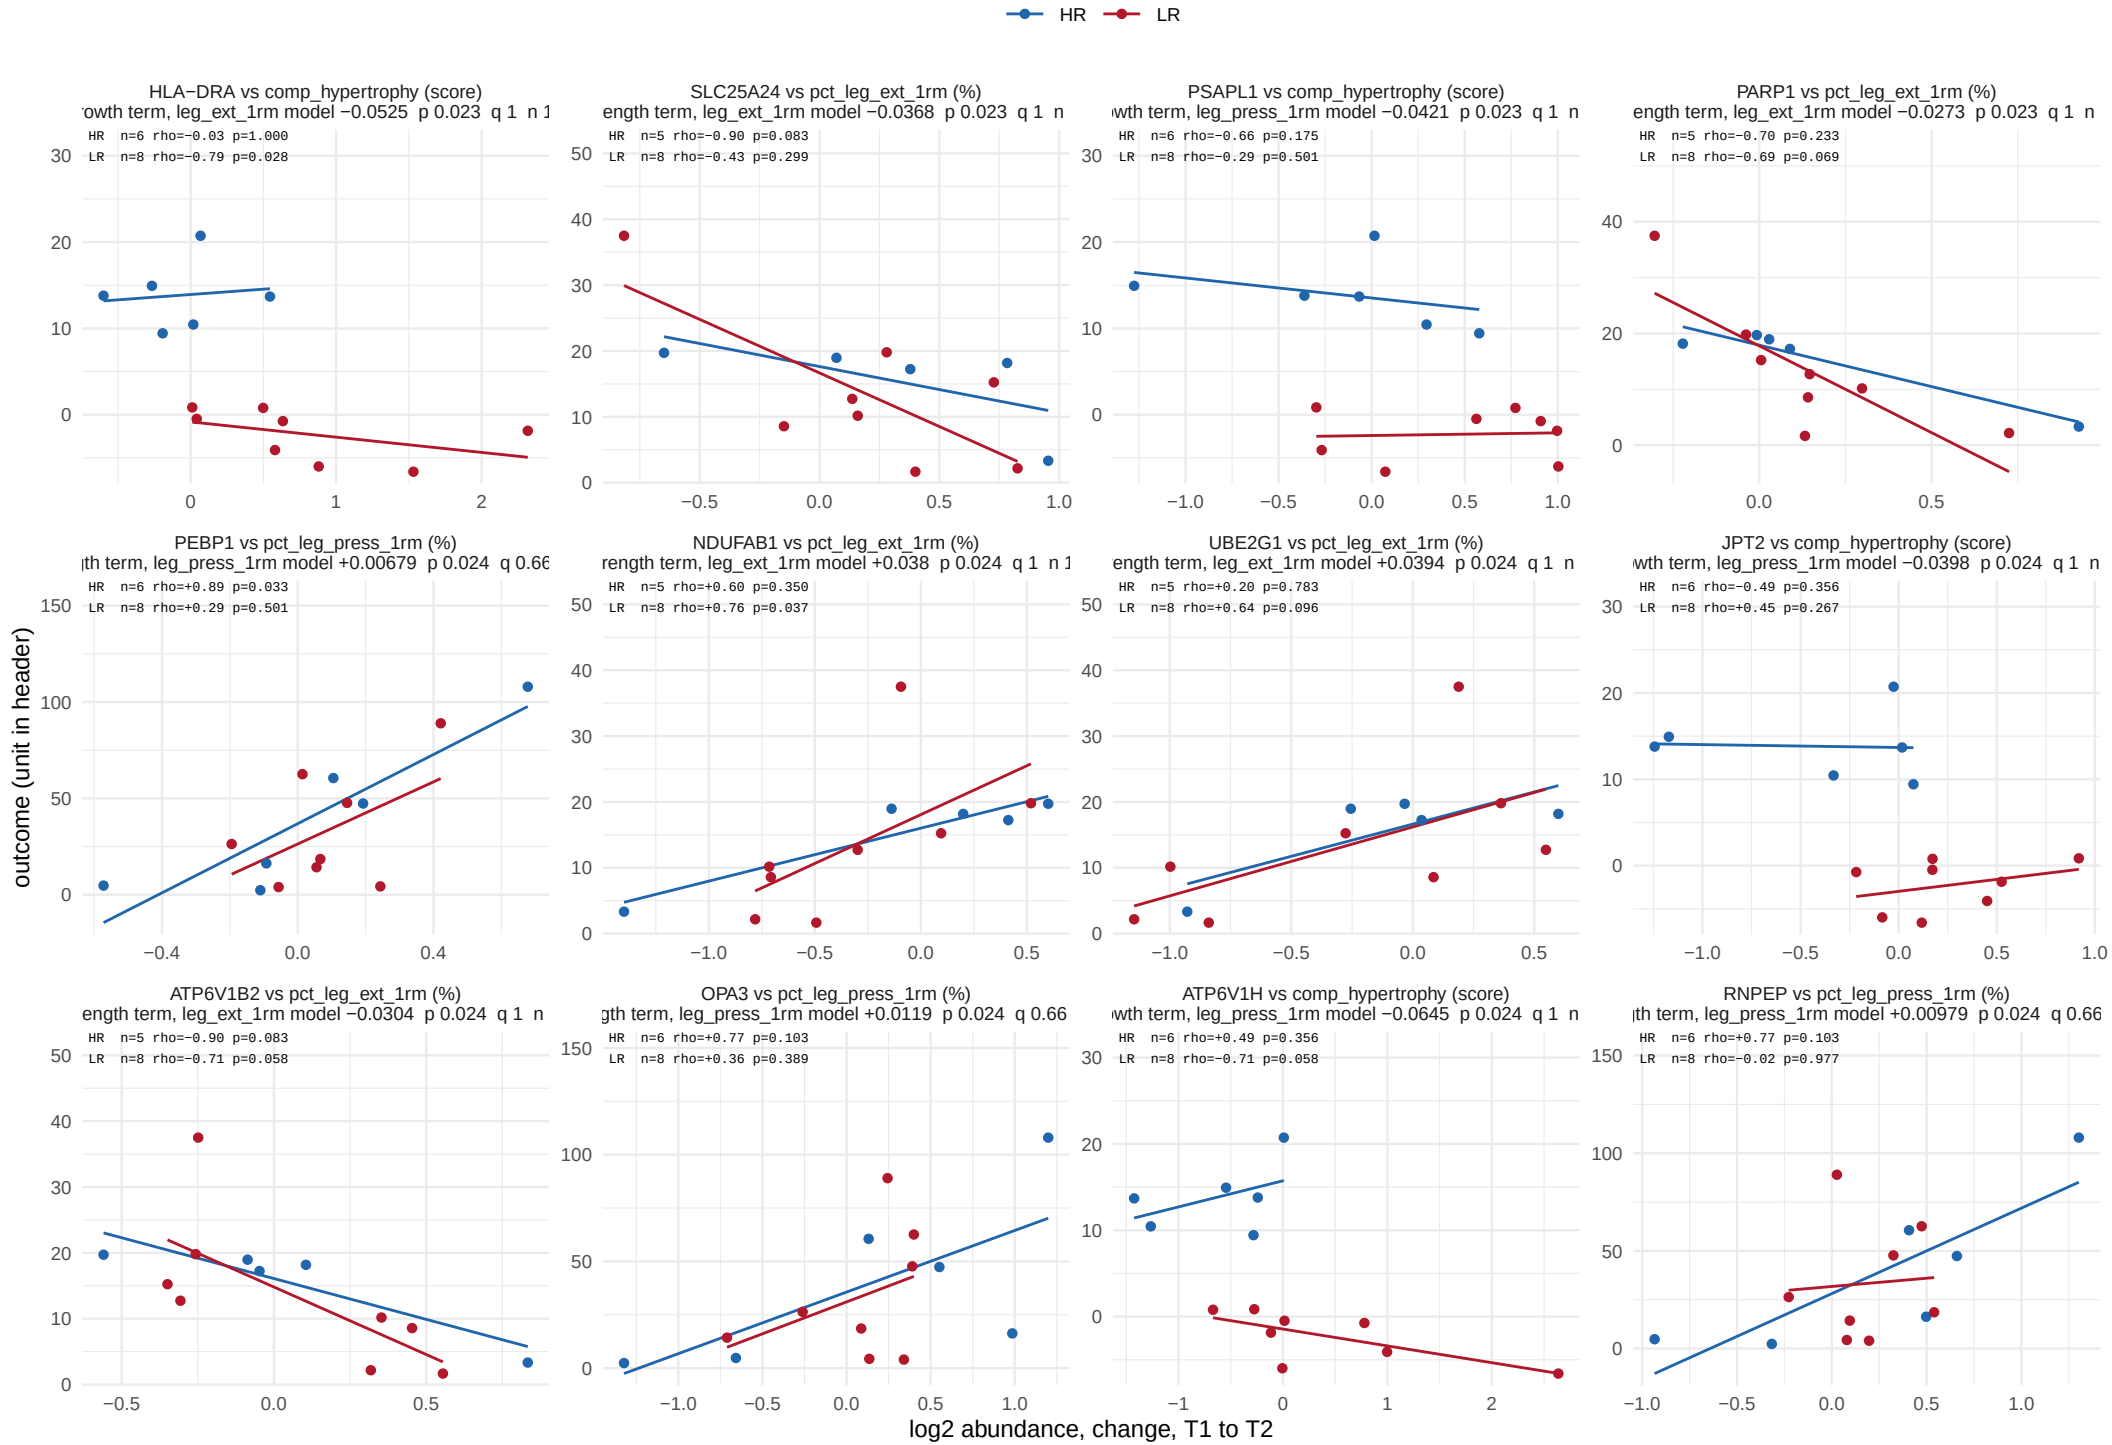

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, training window


311 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 12 of 26.

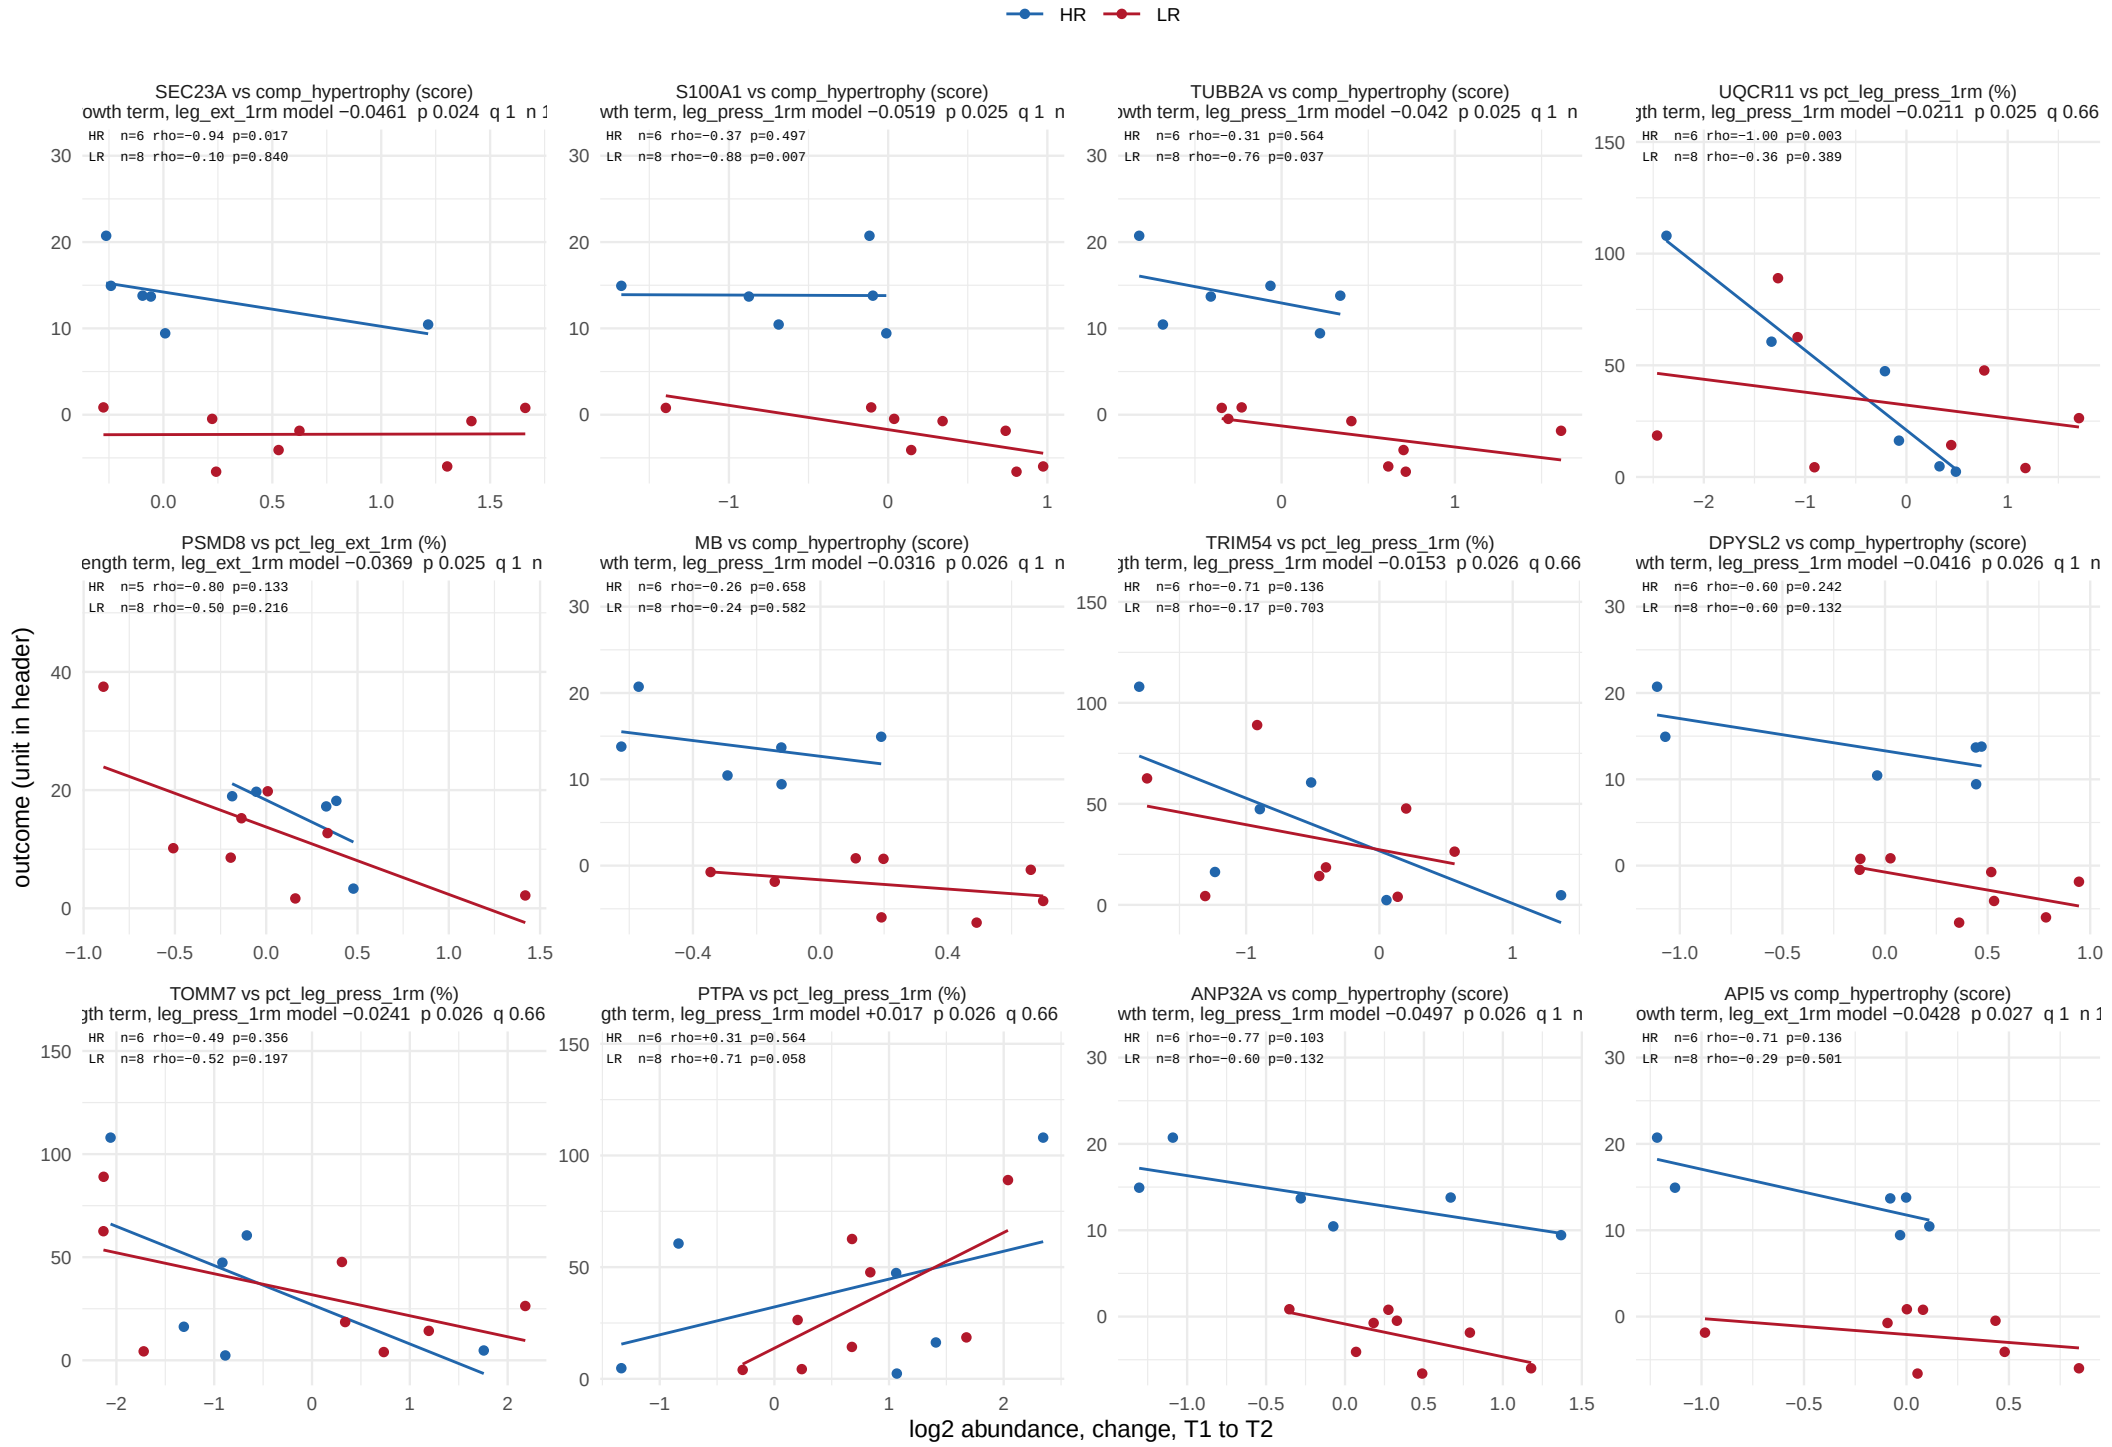

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, training window


311 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 13 of 26.

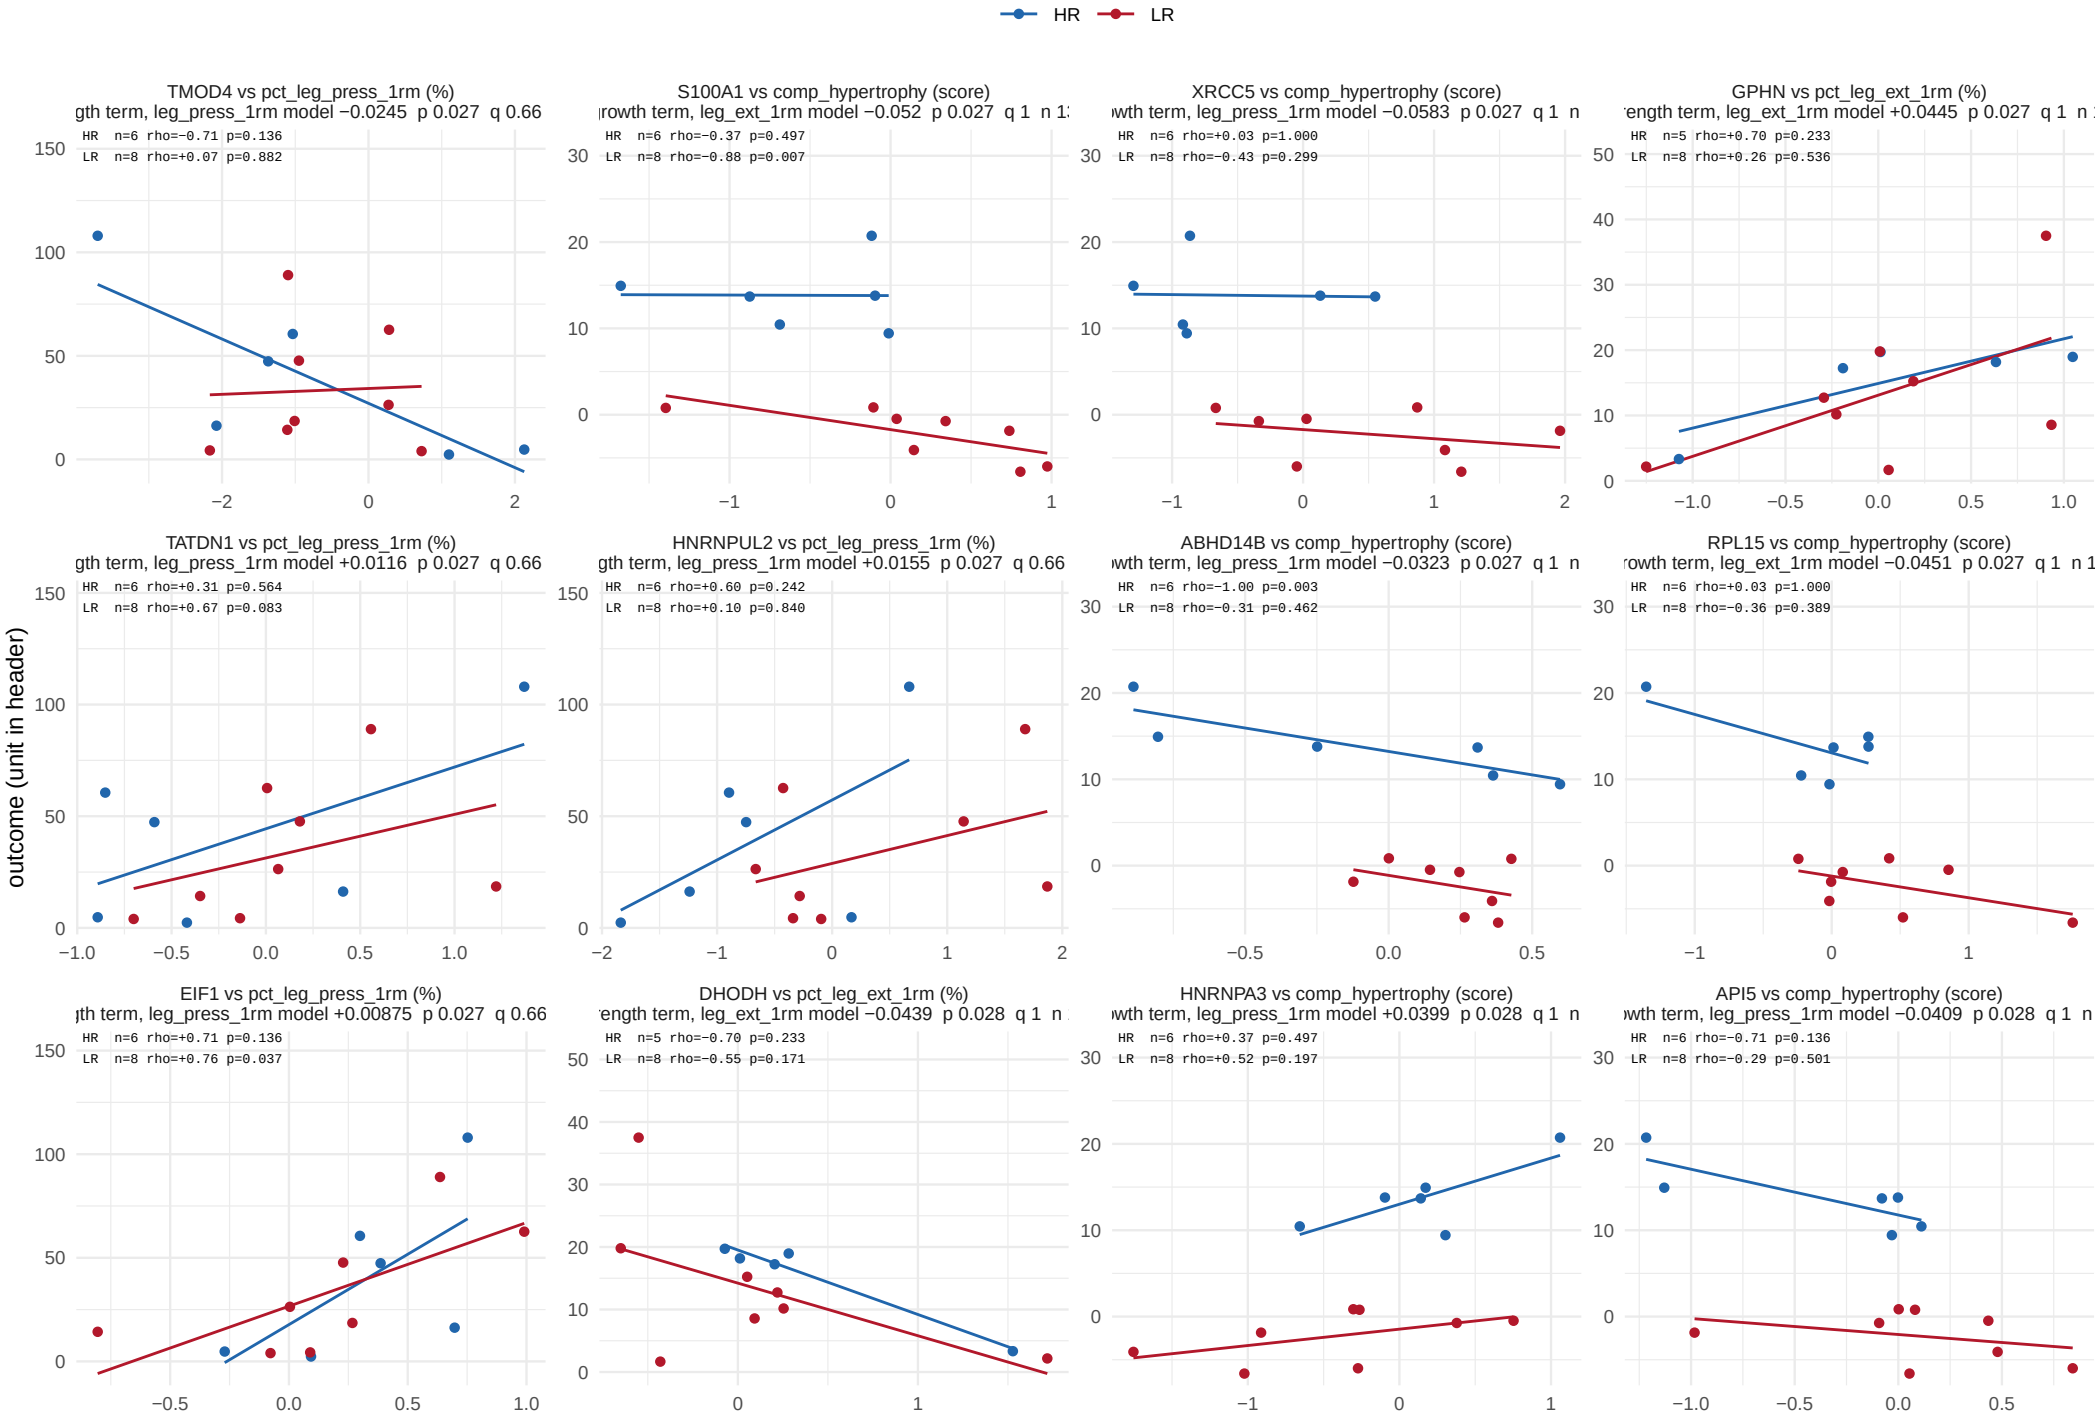

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, training window


311 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 14 of 26.

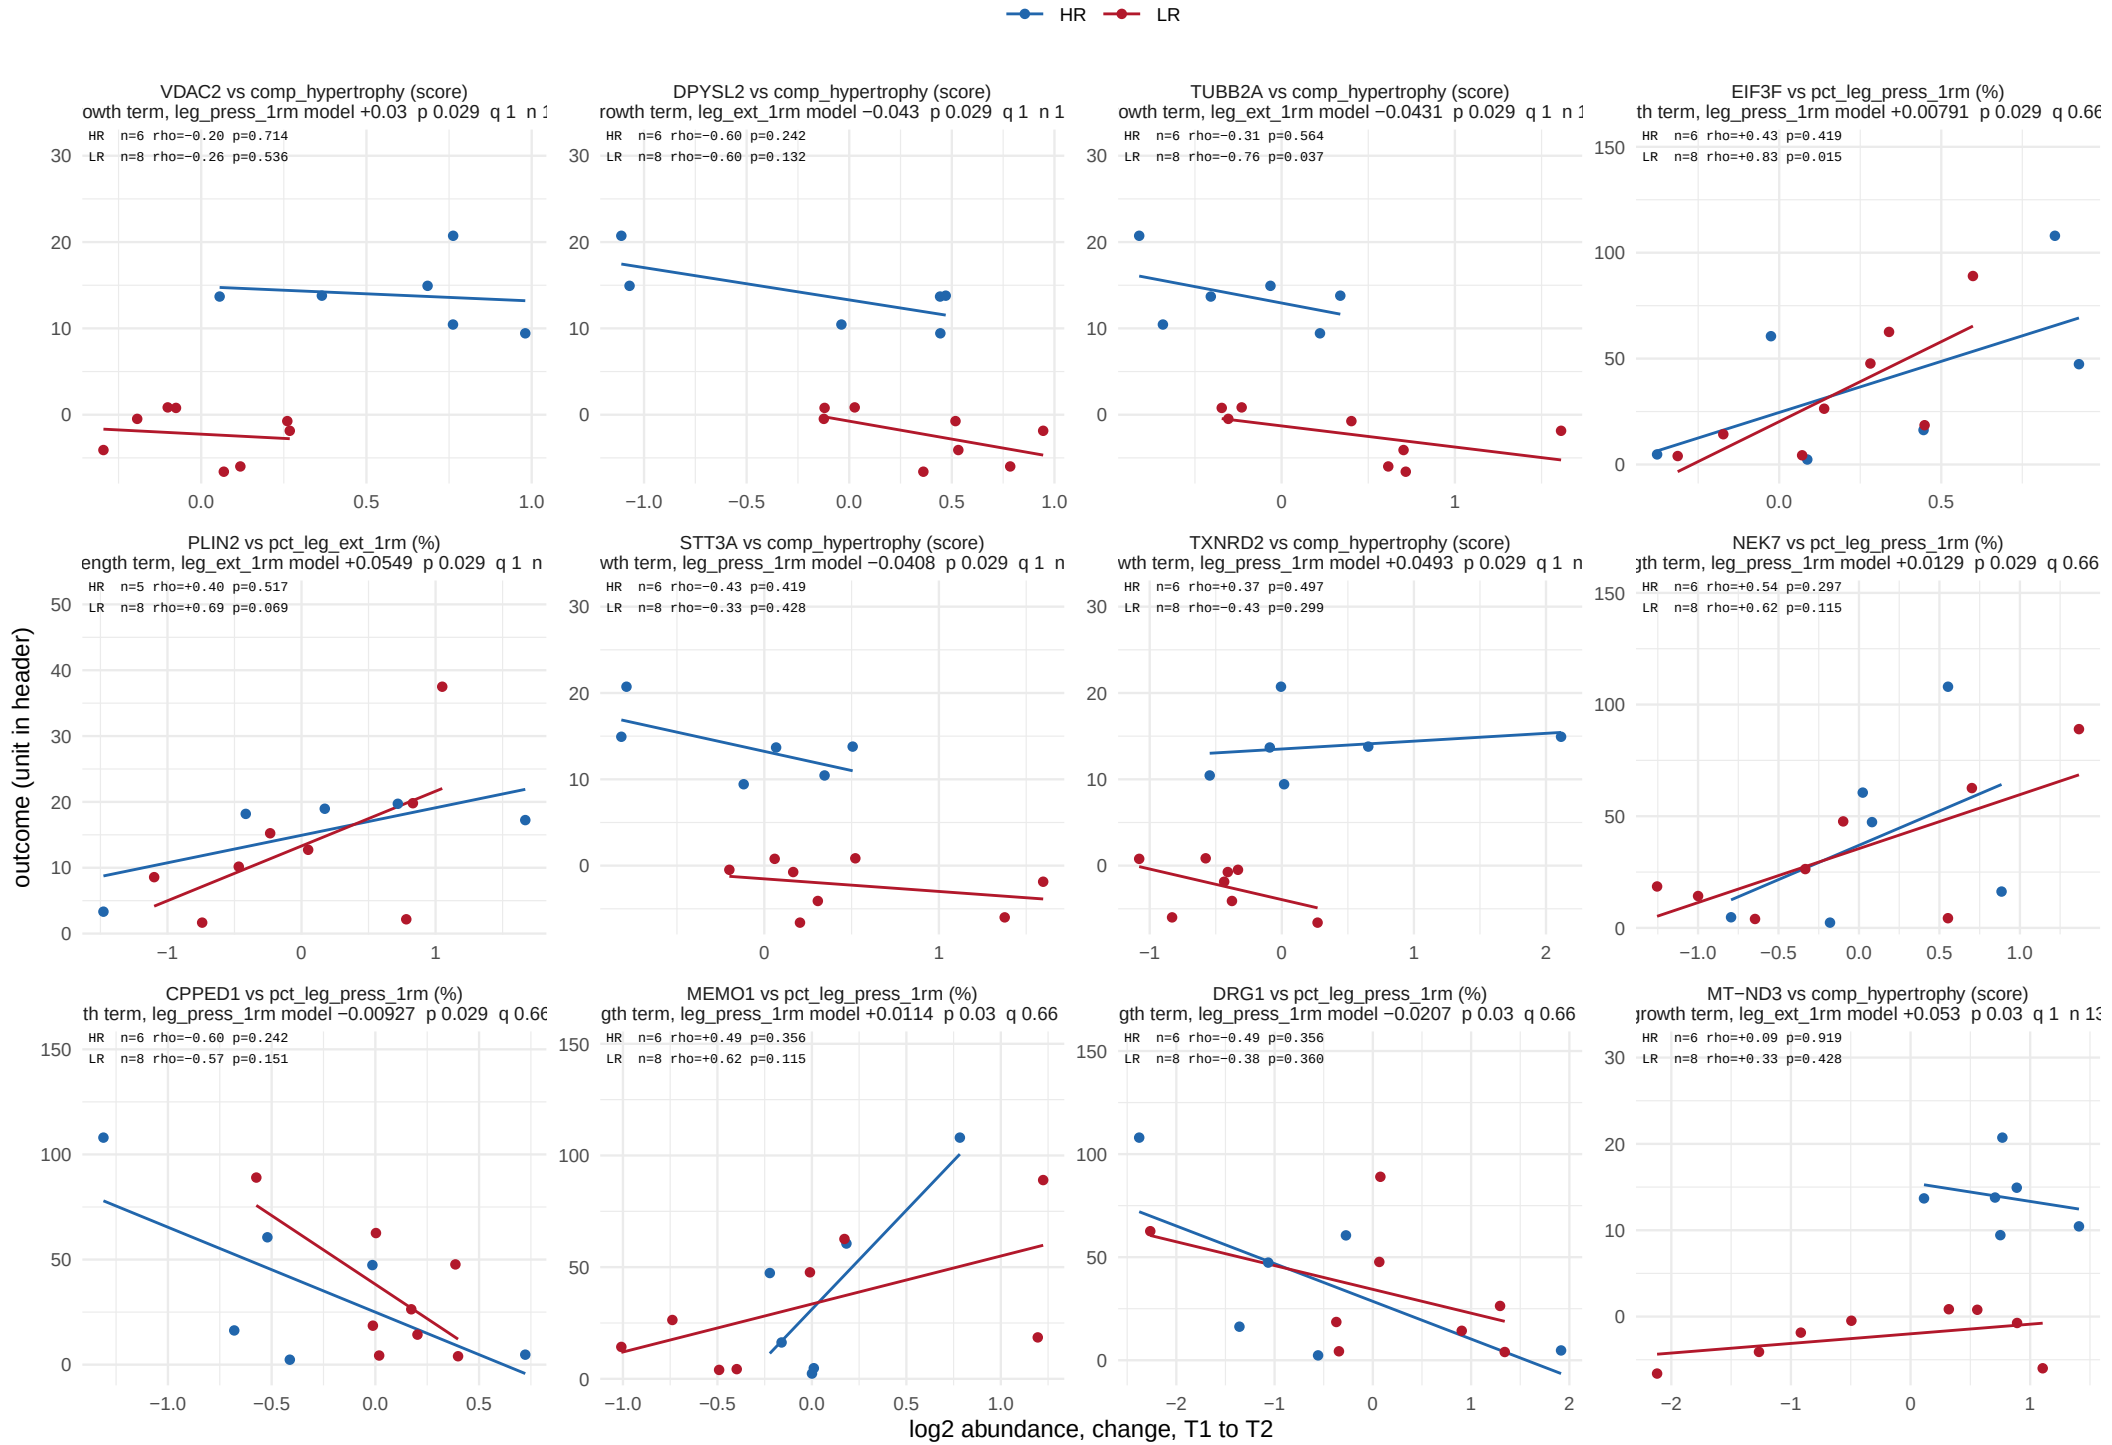

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, training window


311 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 15 of 26.

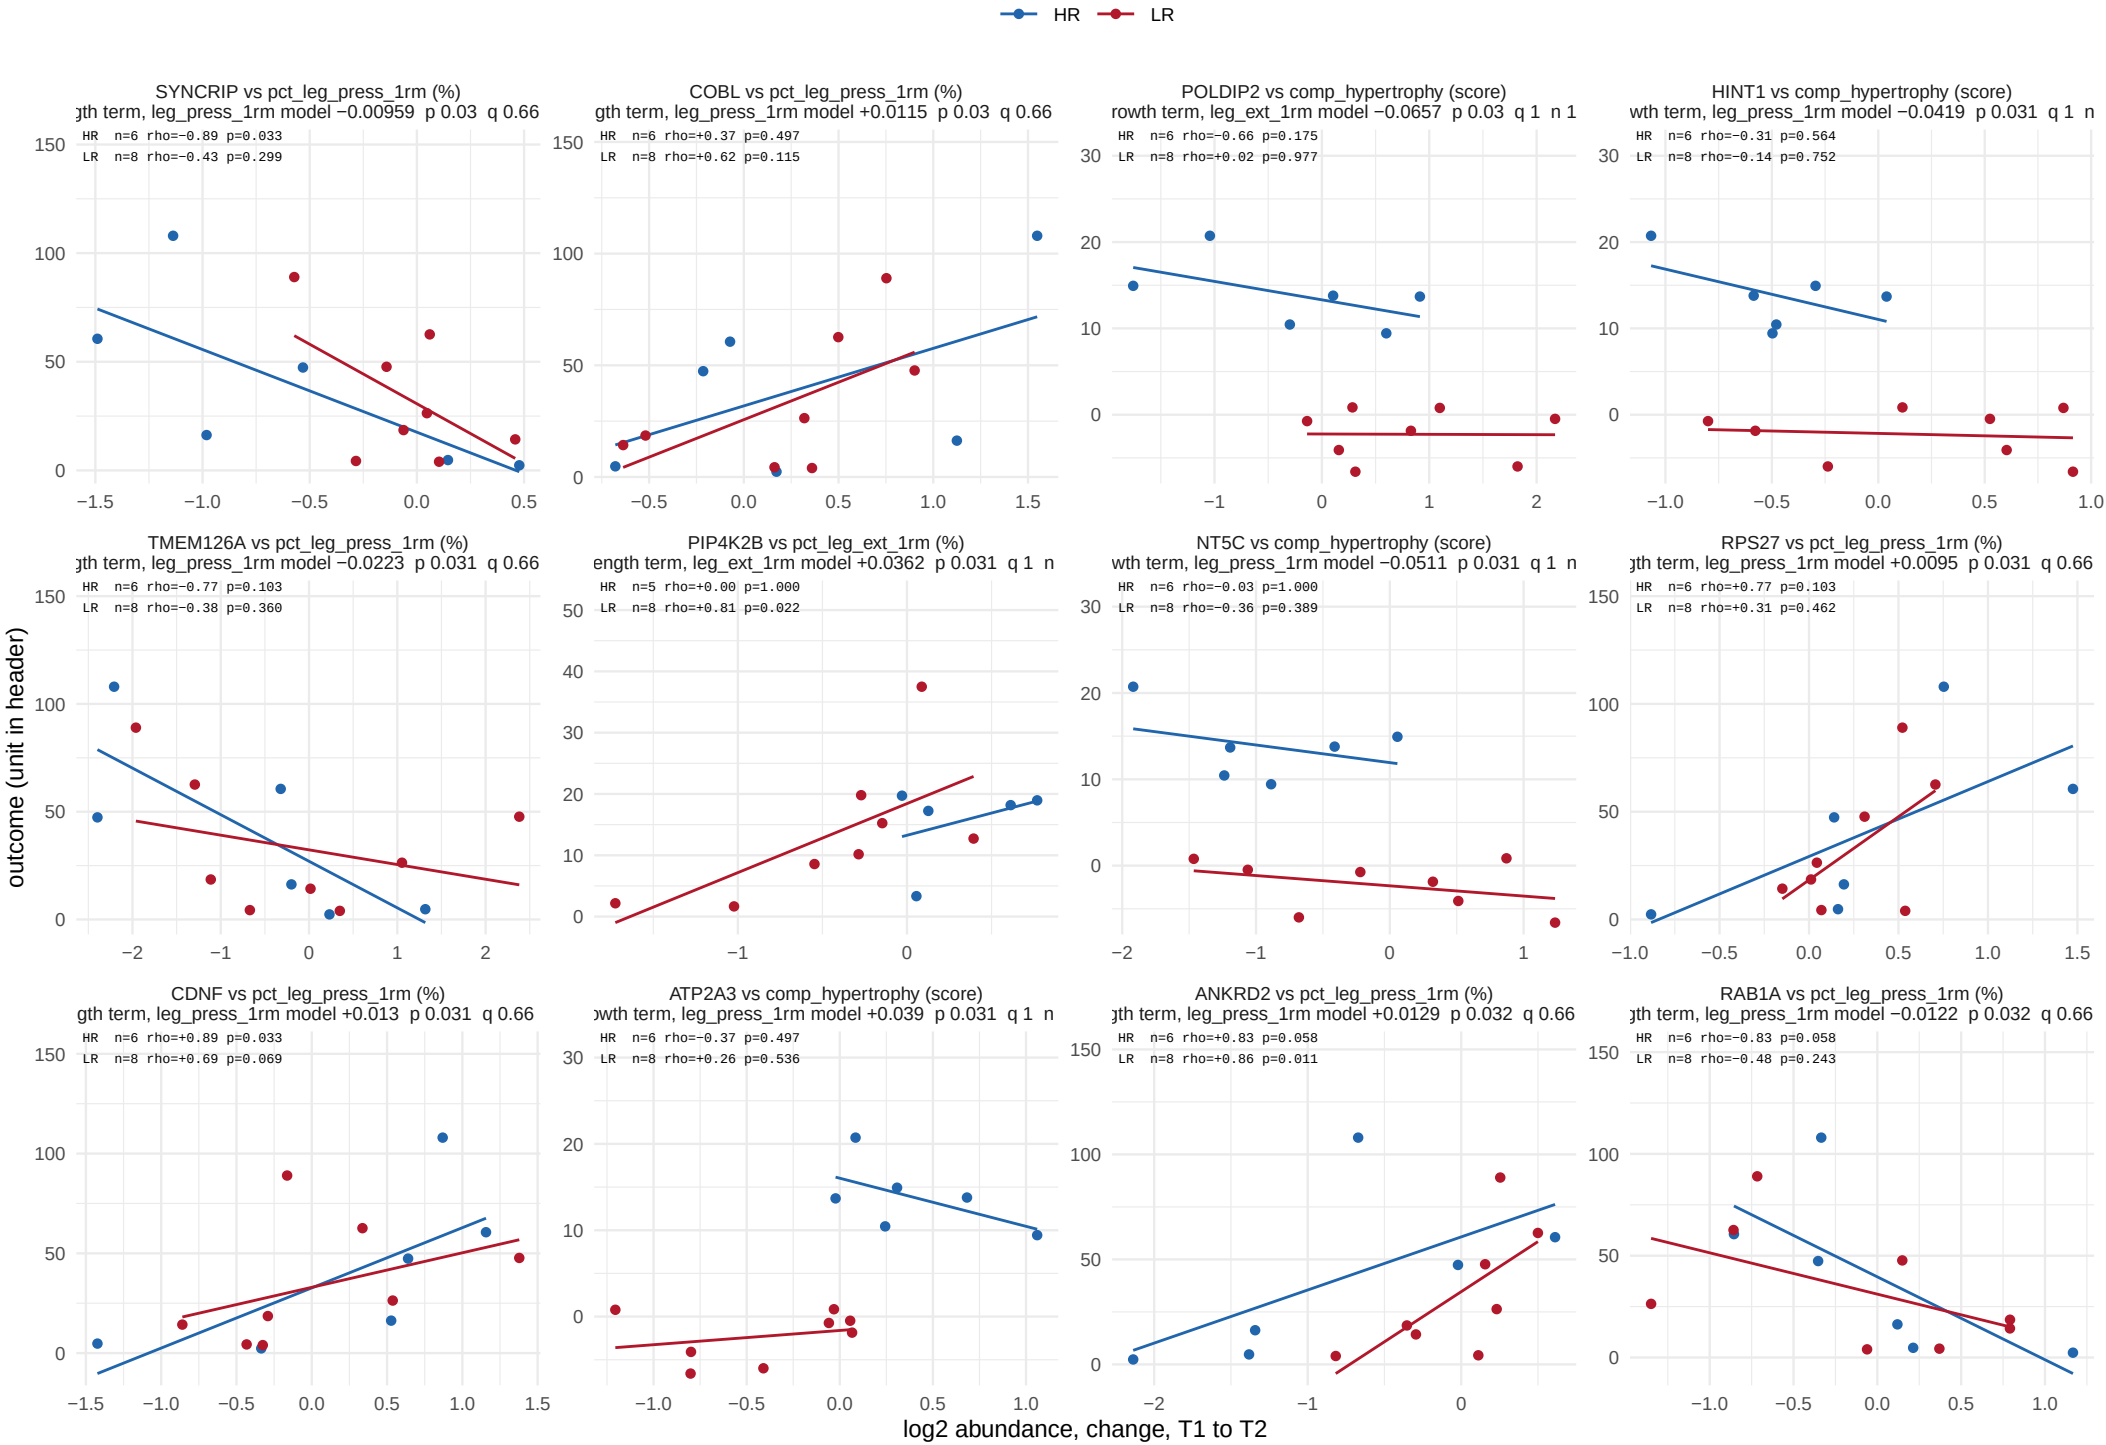

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, training window


311 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 16 of 26.

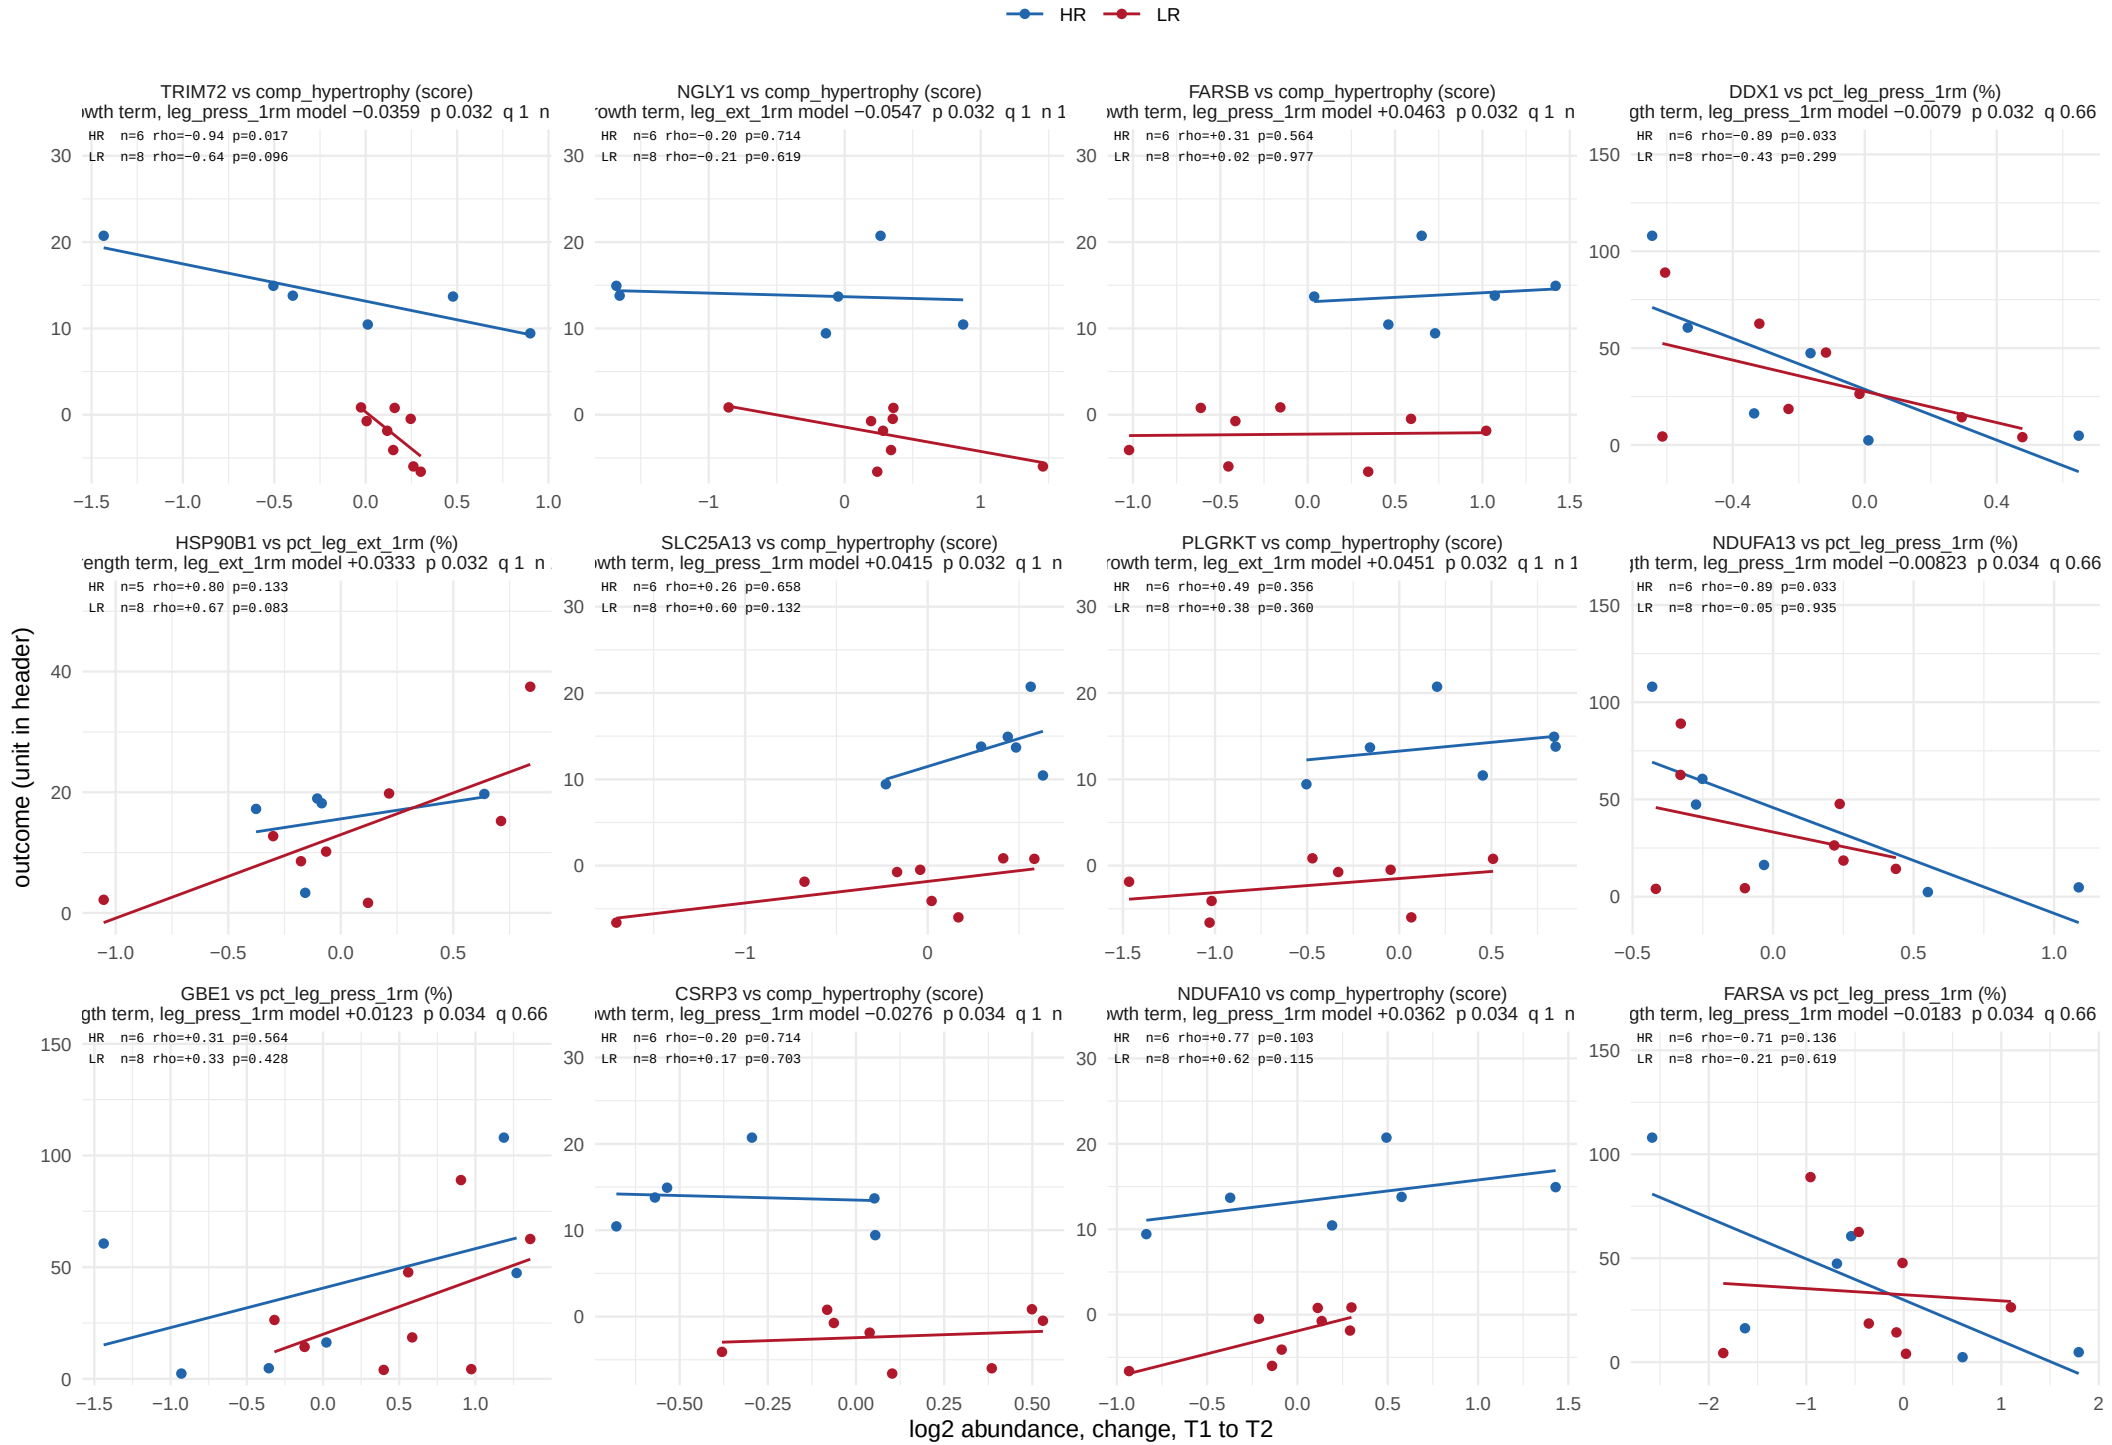

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, training window


311 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 17 of 26.

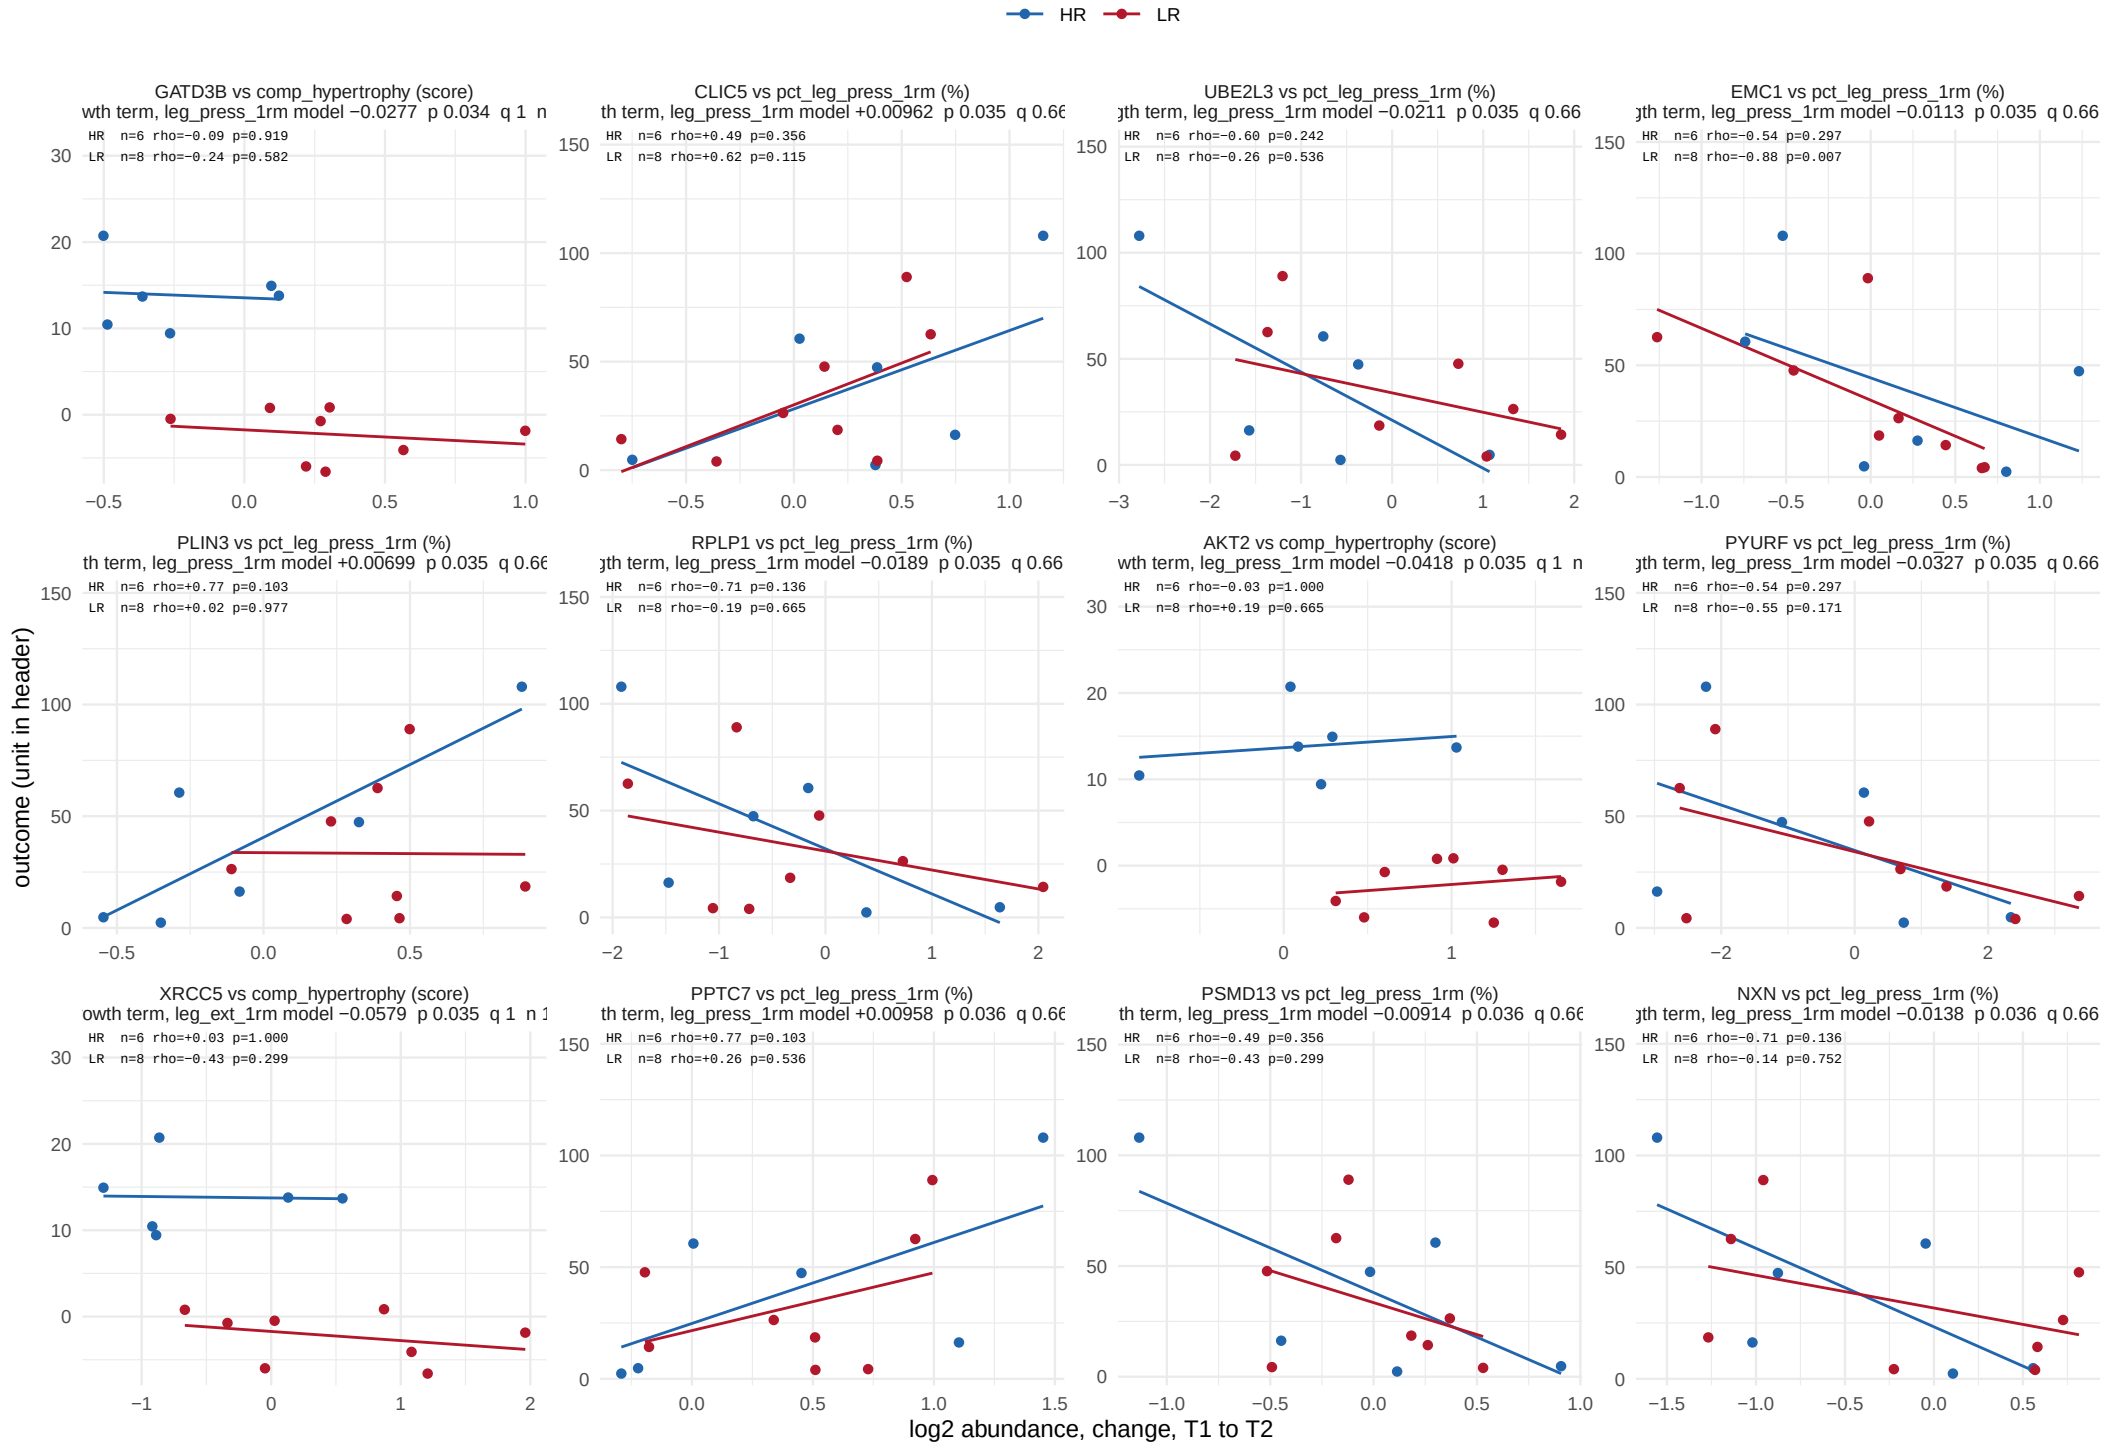

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, training window


311 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 18 of 26.

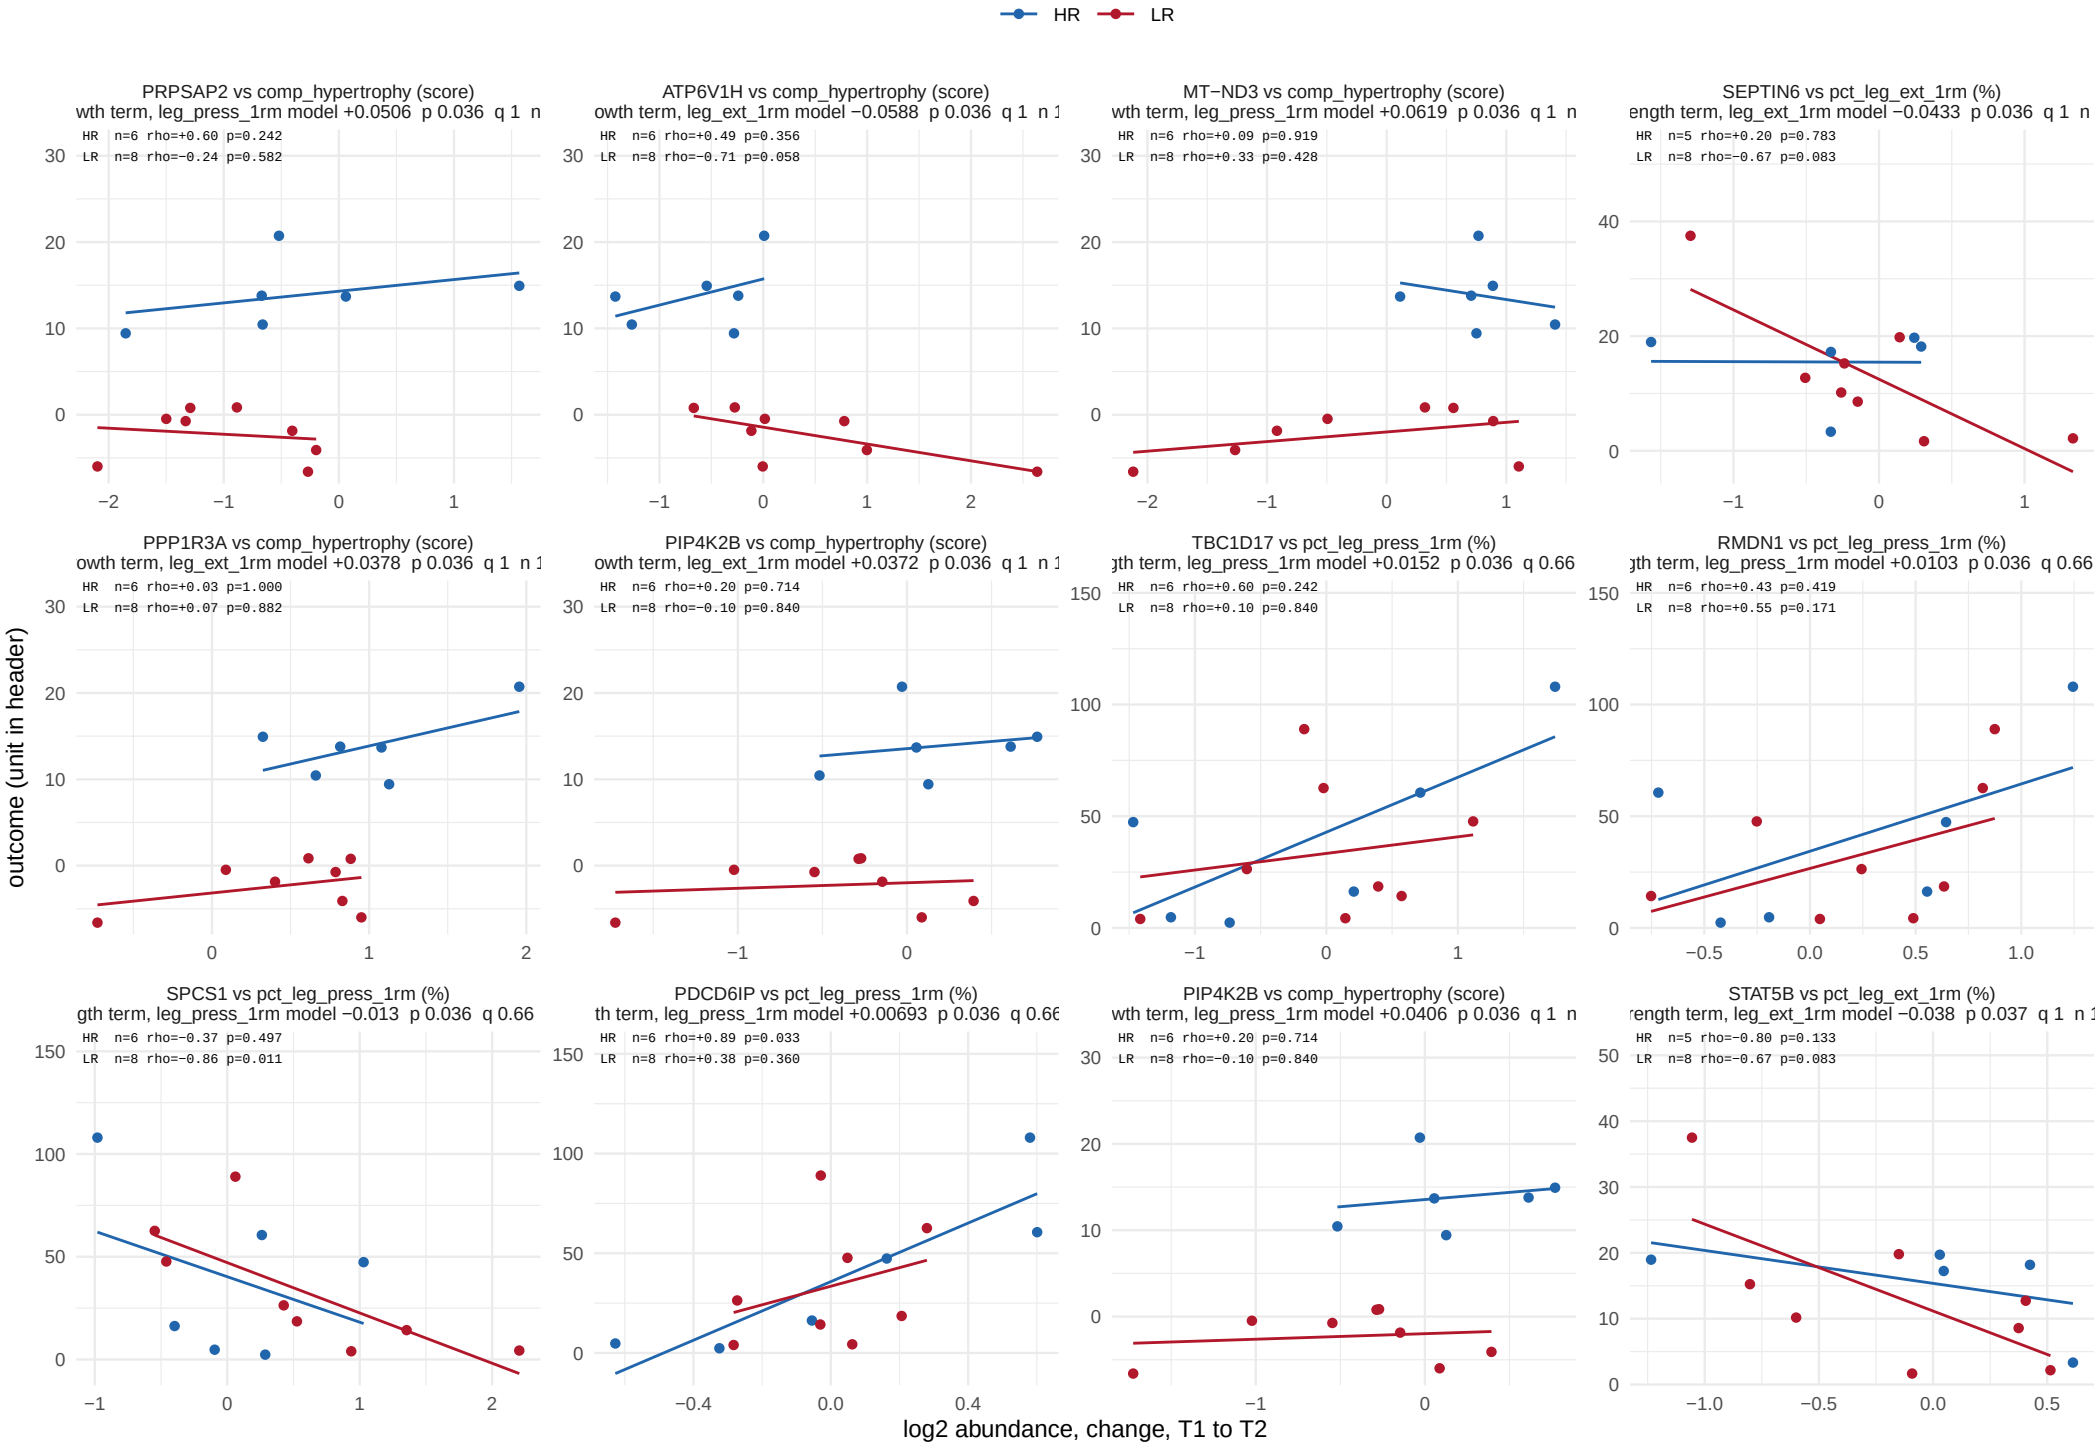

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, training window


311 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 19 of 26.

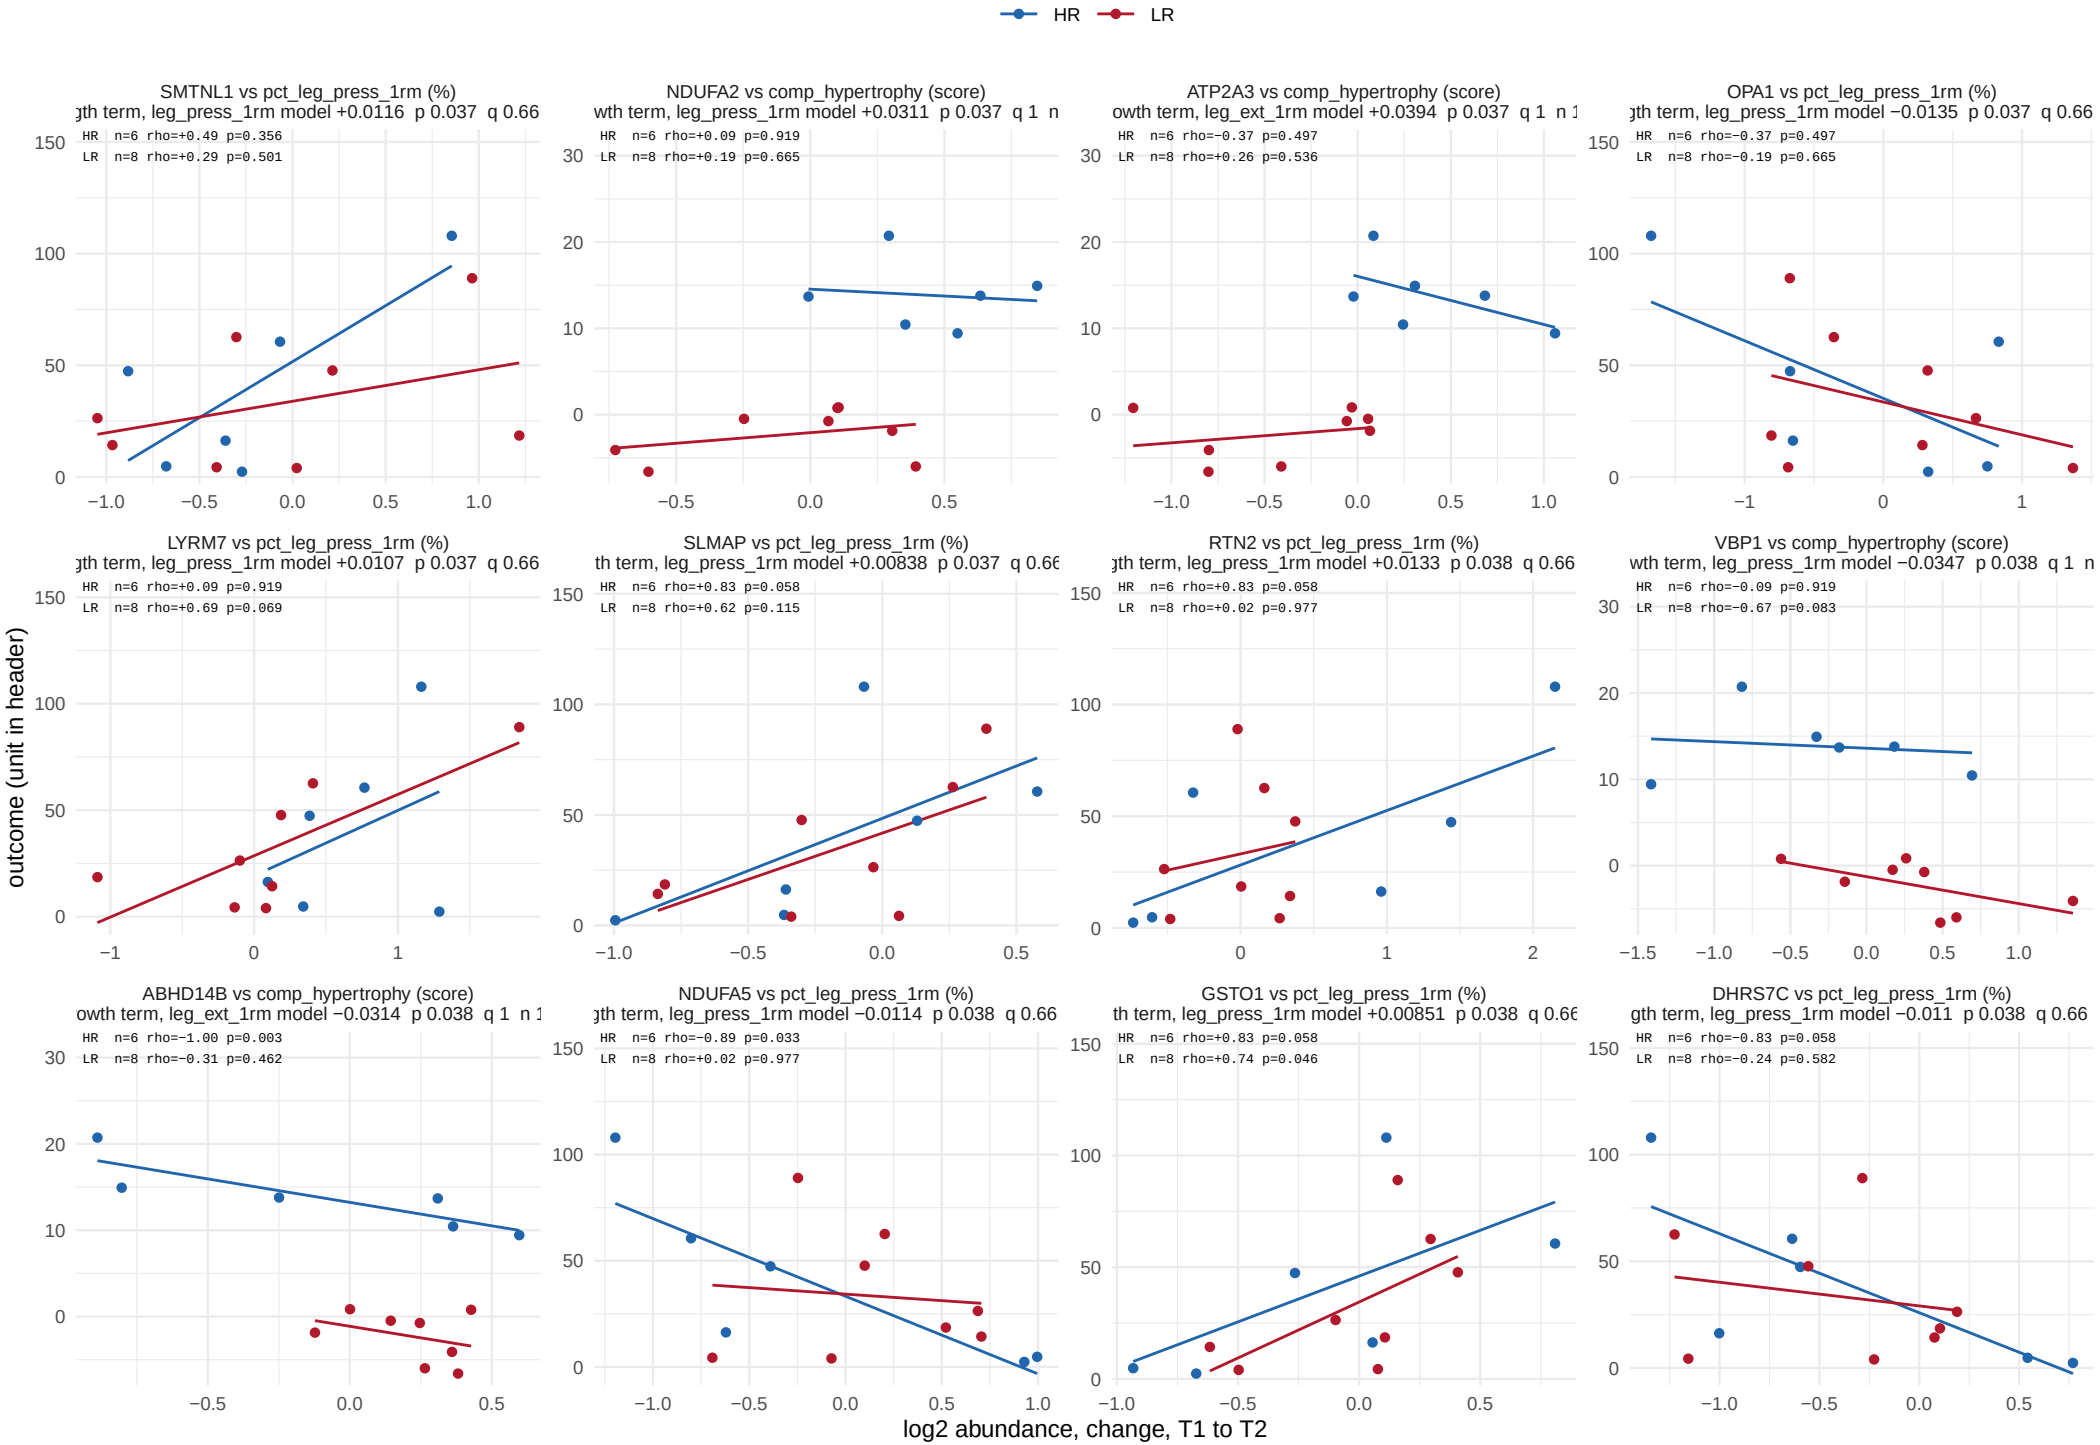

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, training window


311 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 20 of 26.

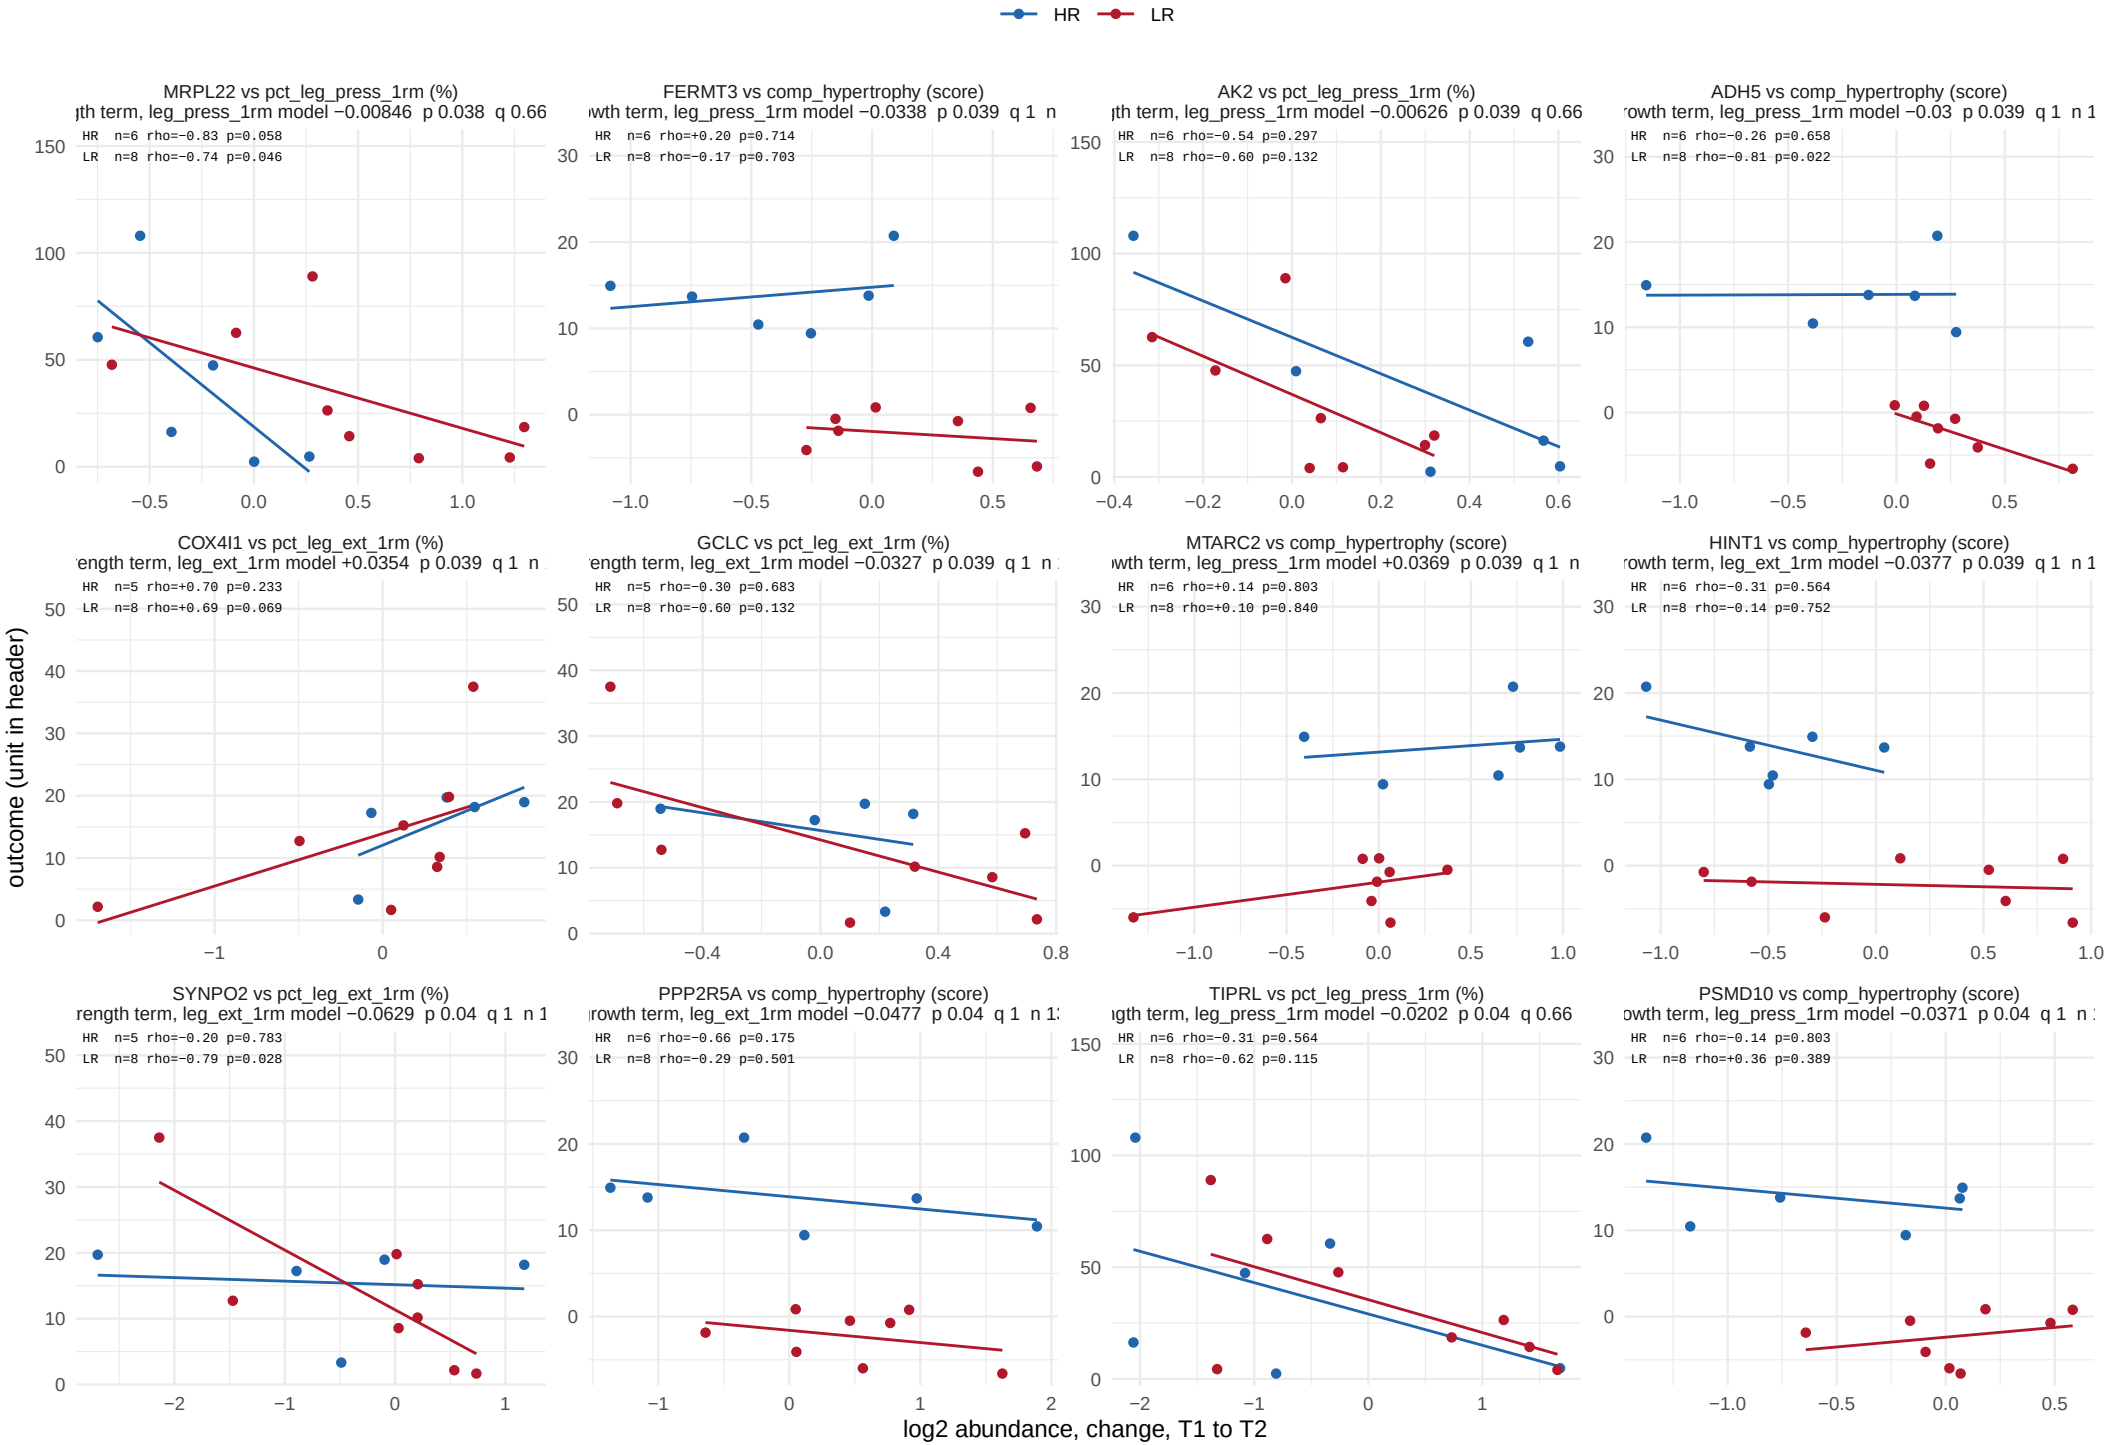

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, training window


311 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 21 of 26.

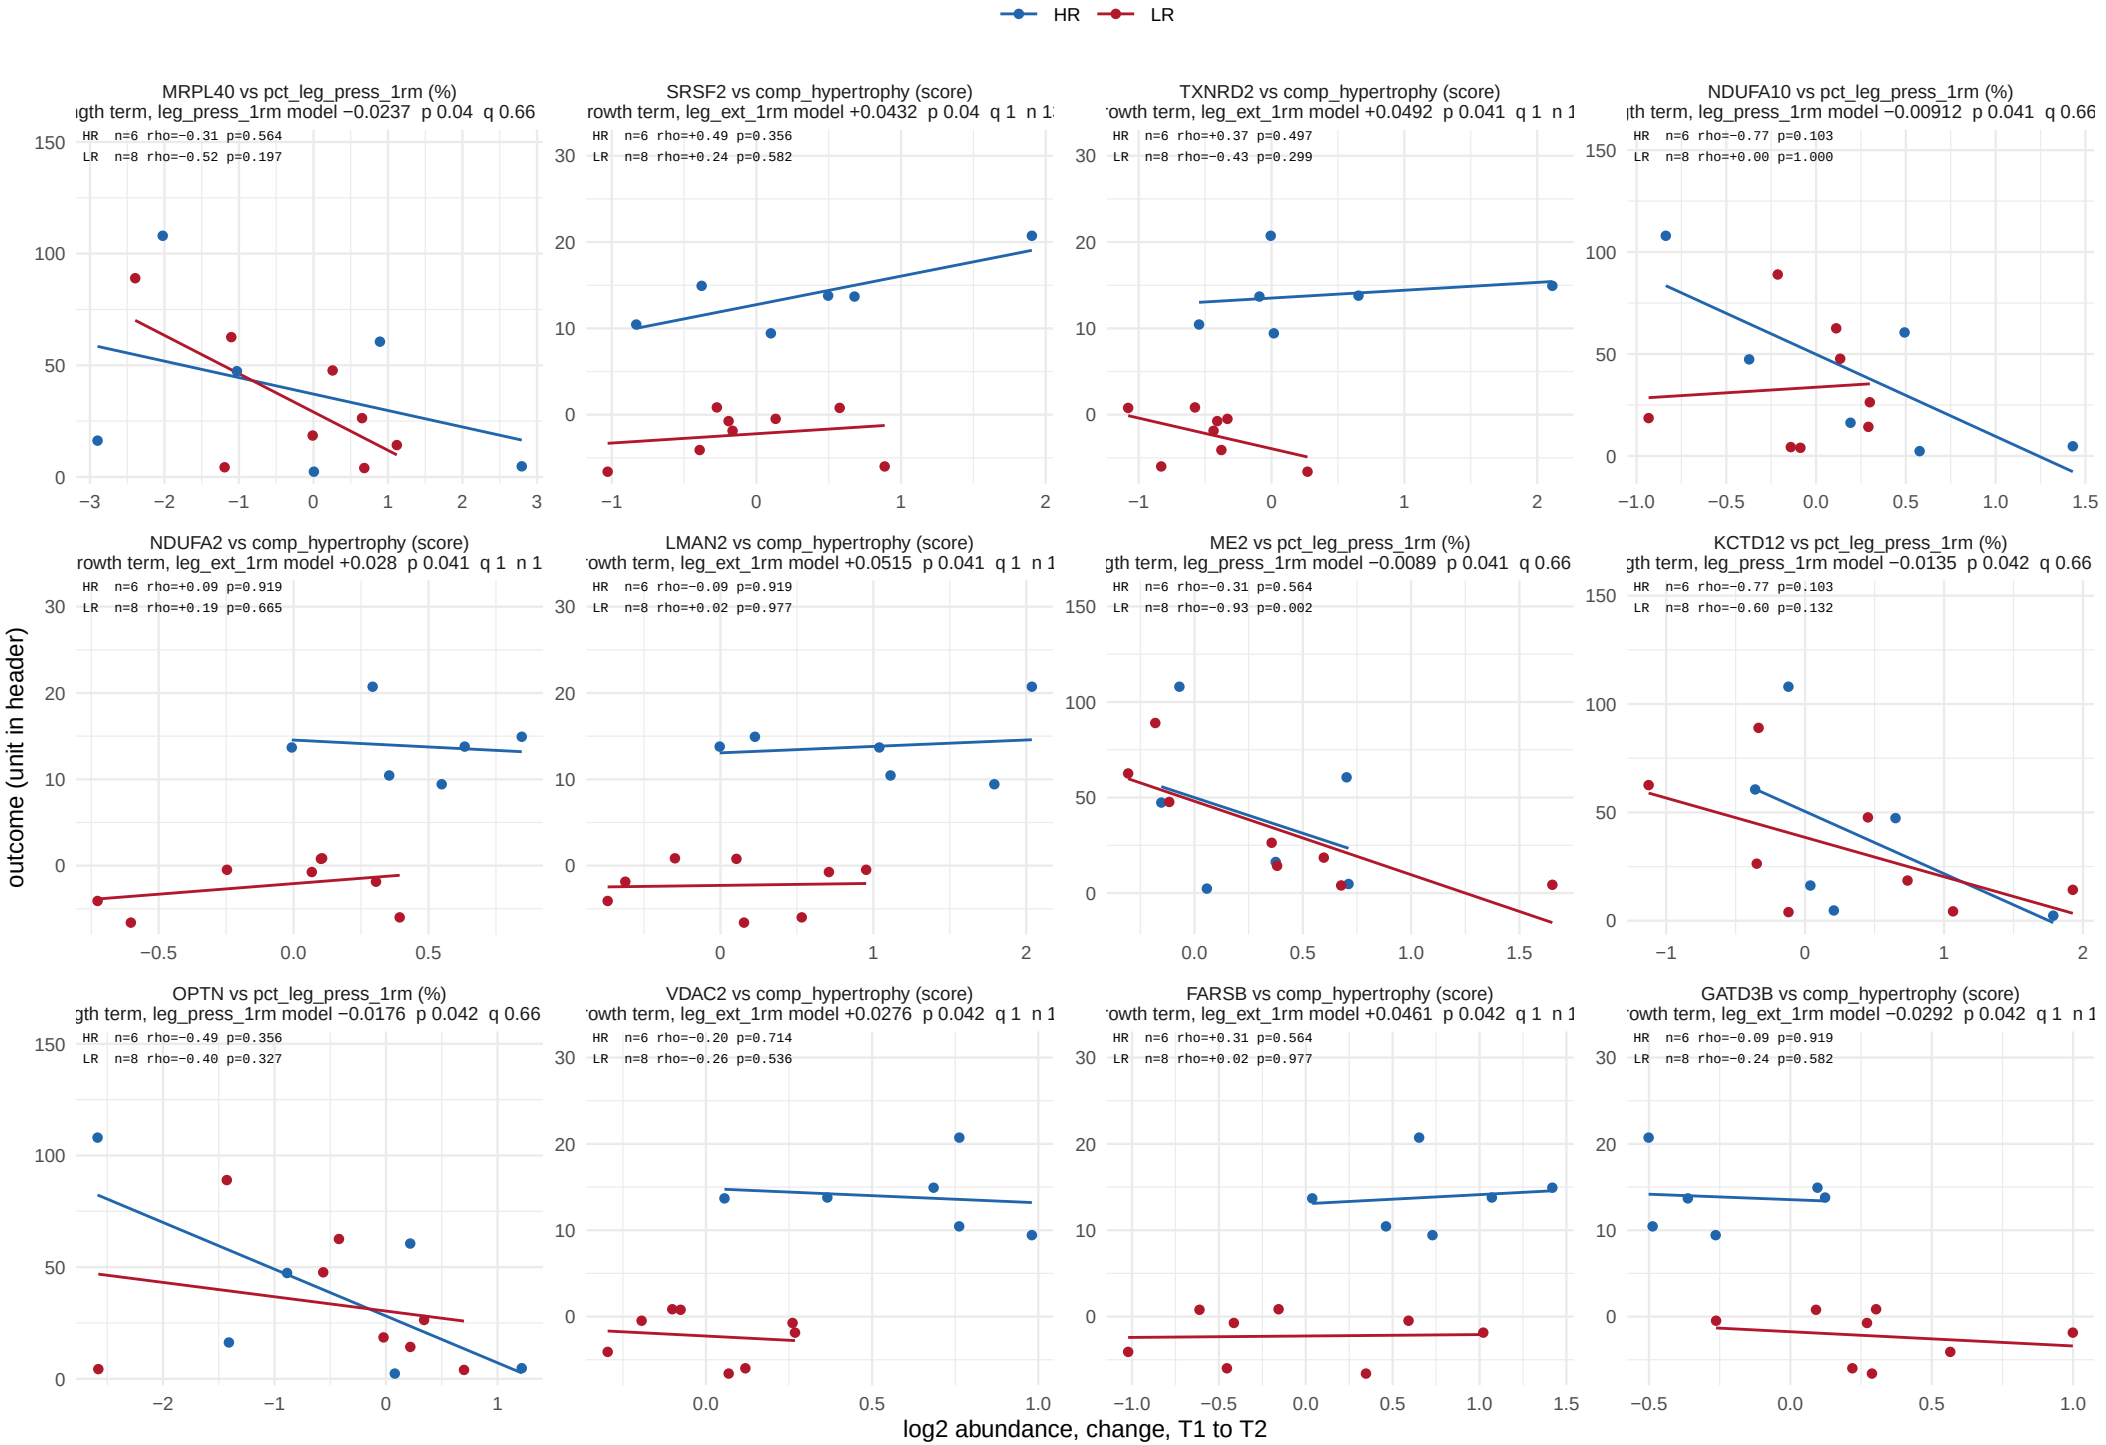

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, training window


311 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 22 of 26.

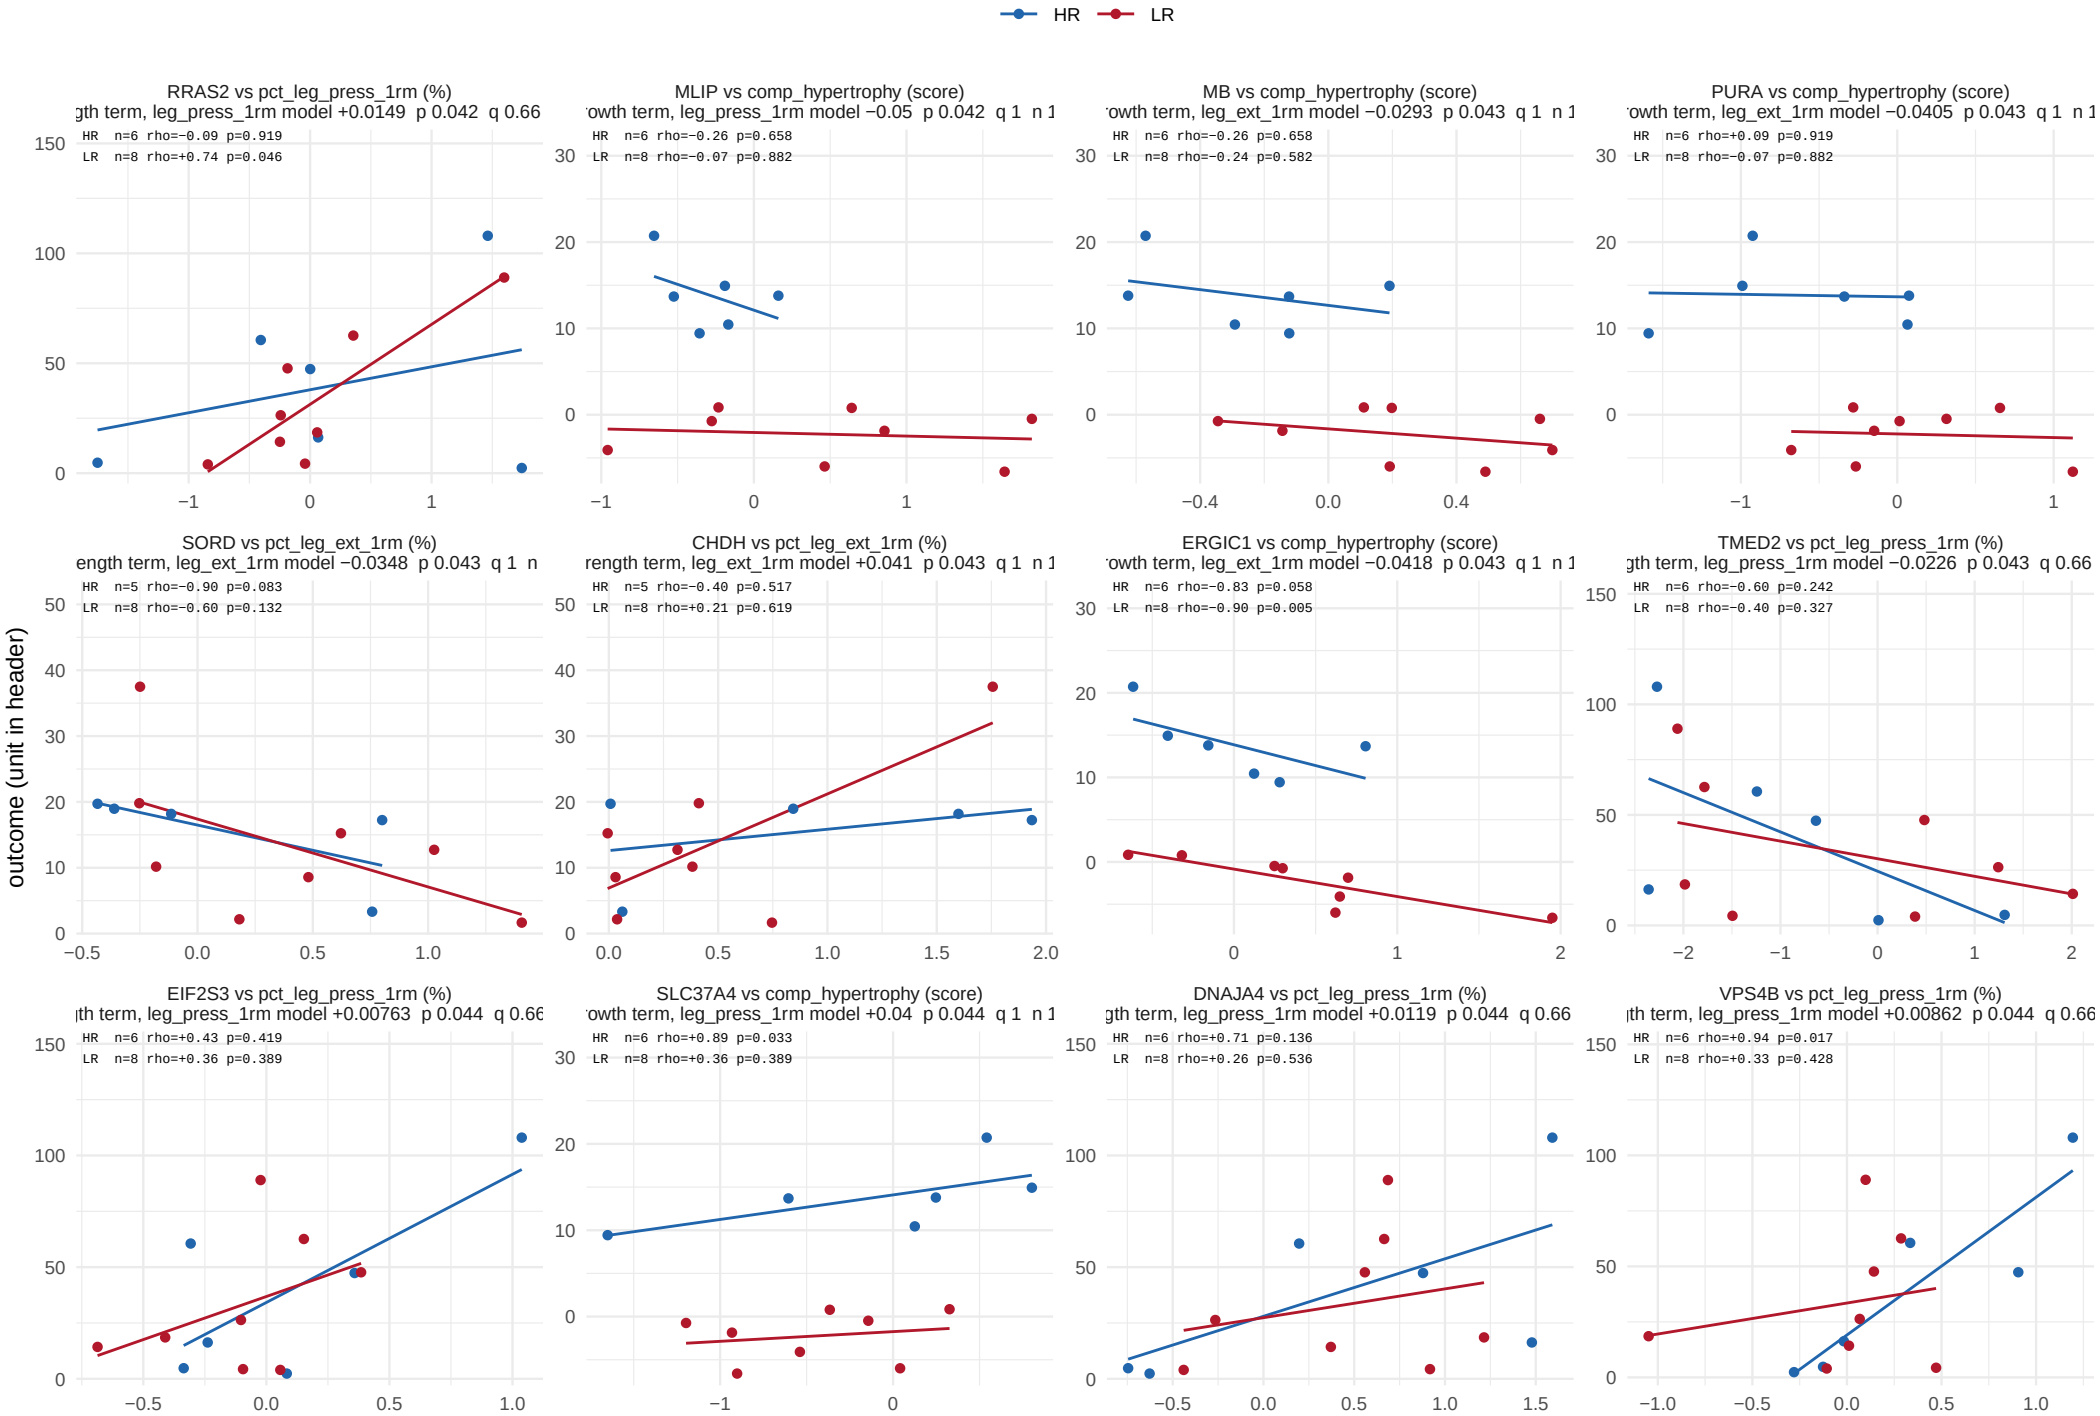

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, training window


311 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 23 of 26.

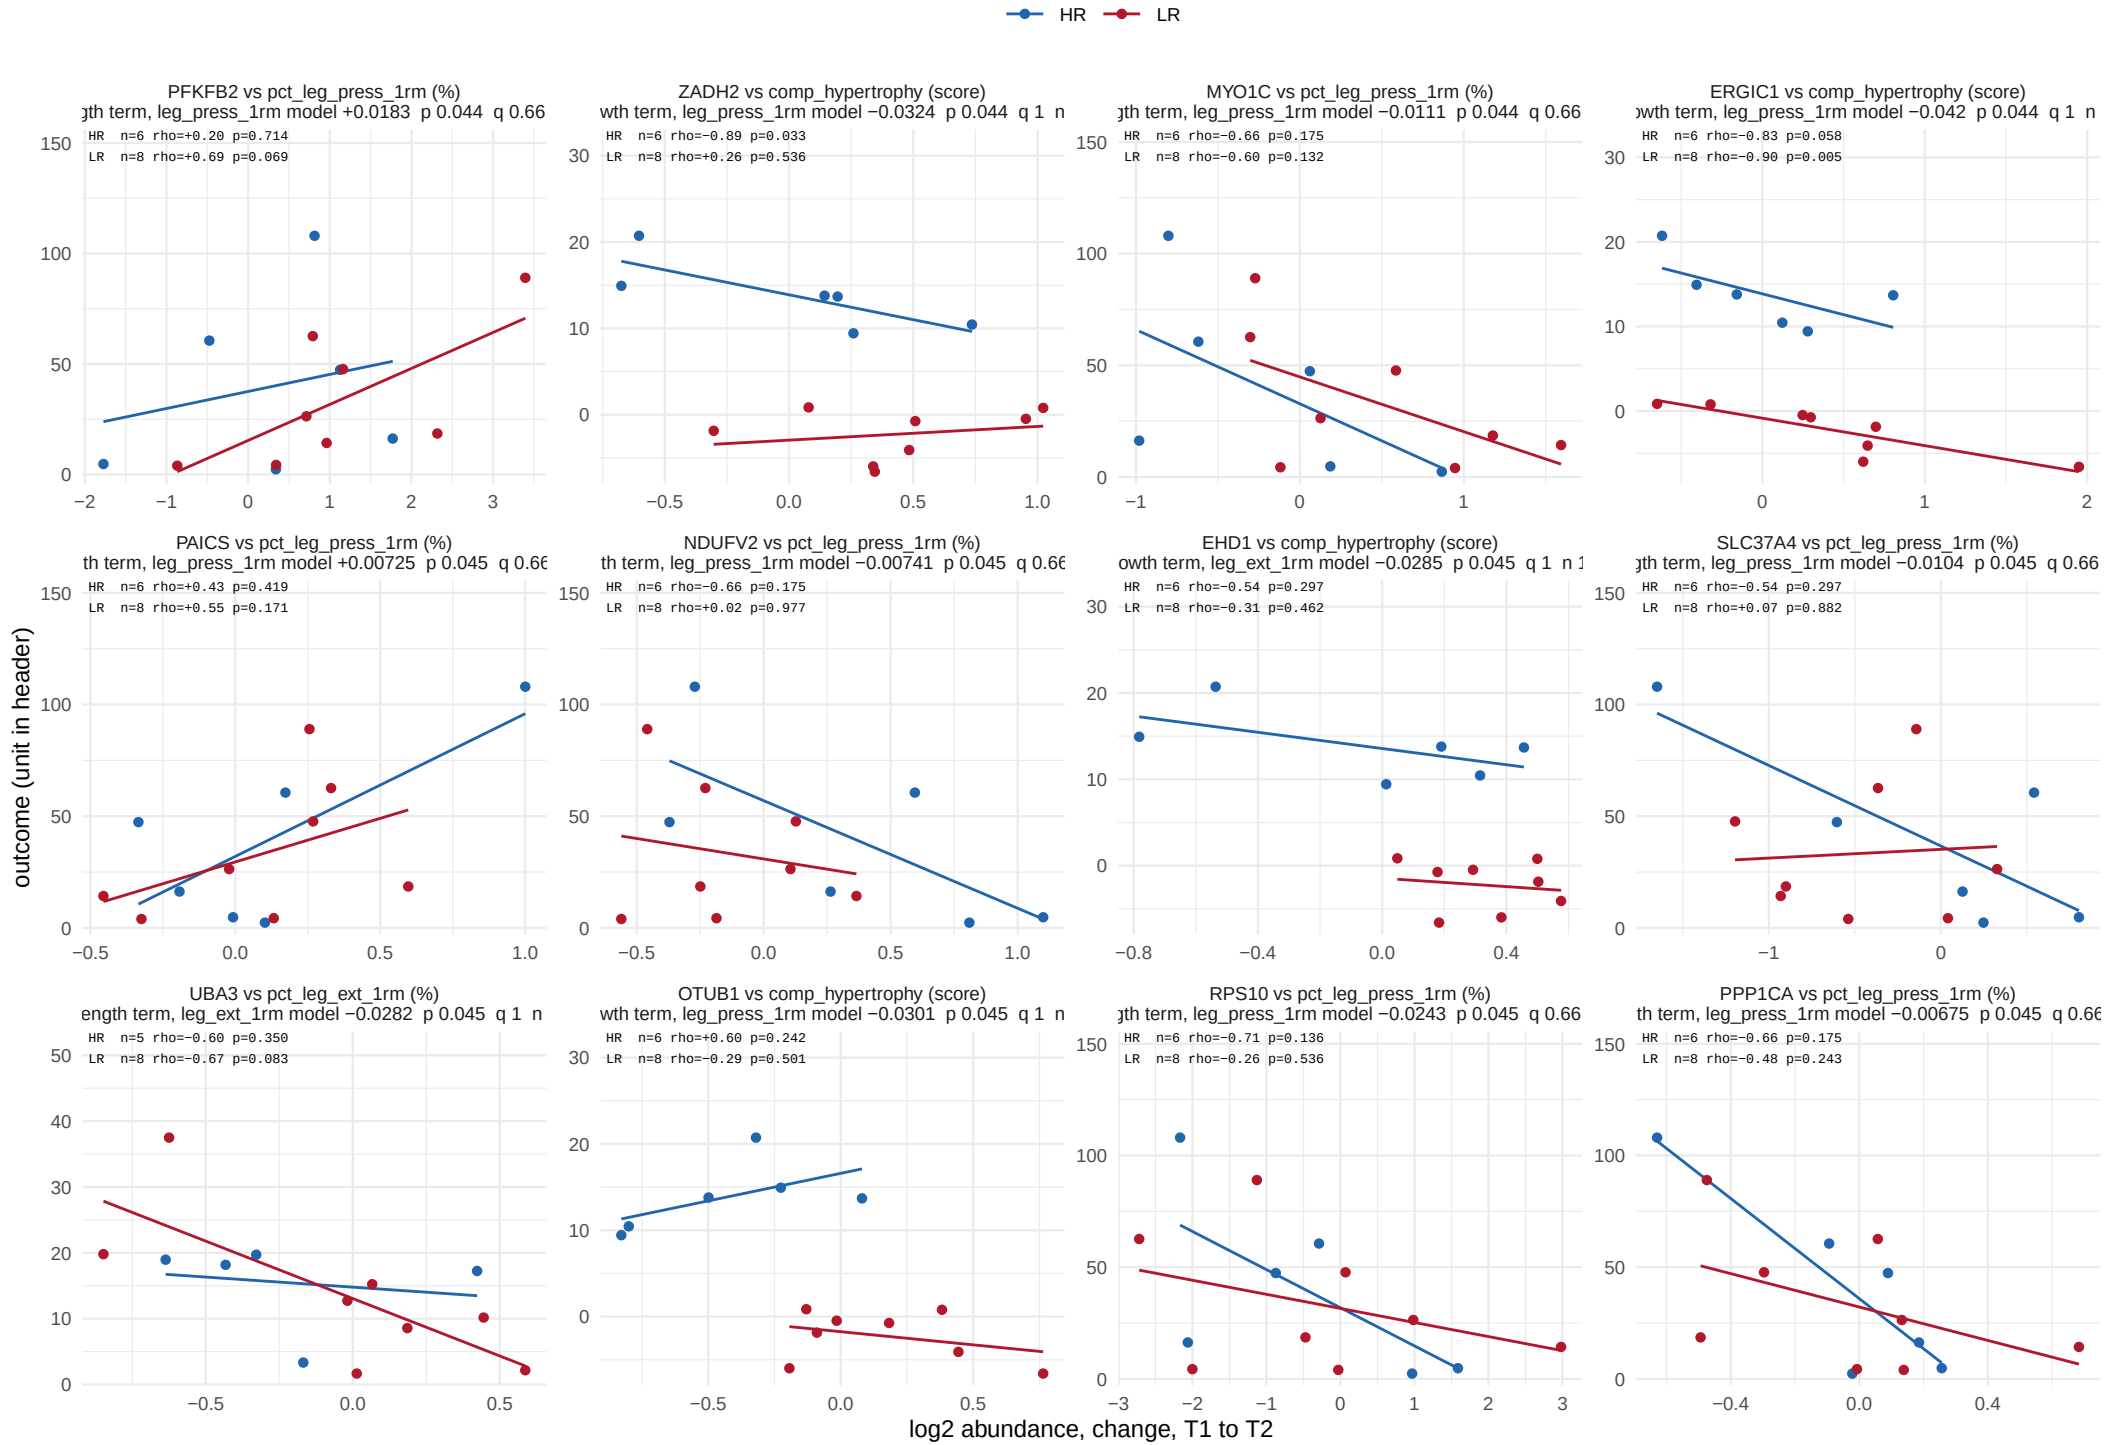

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, training window


311 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 24 of 26.

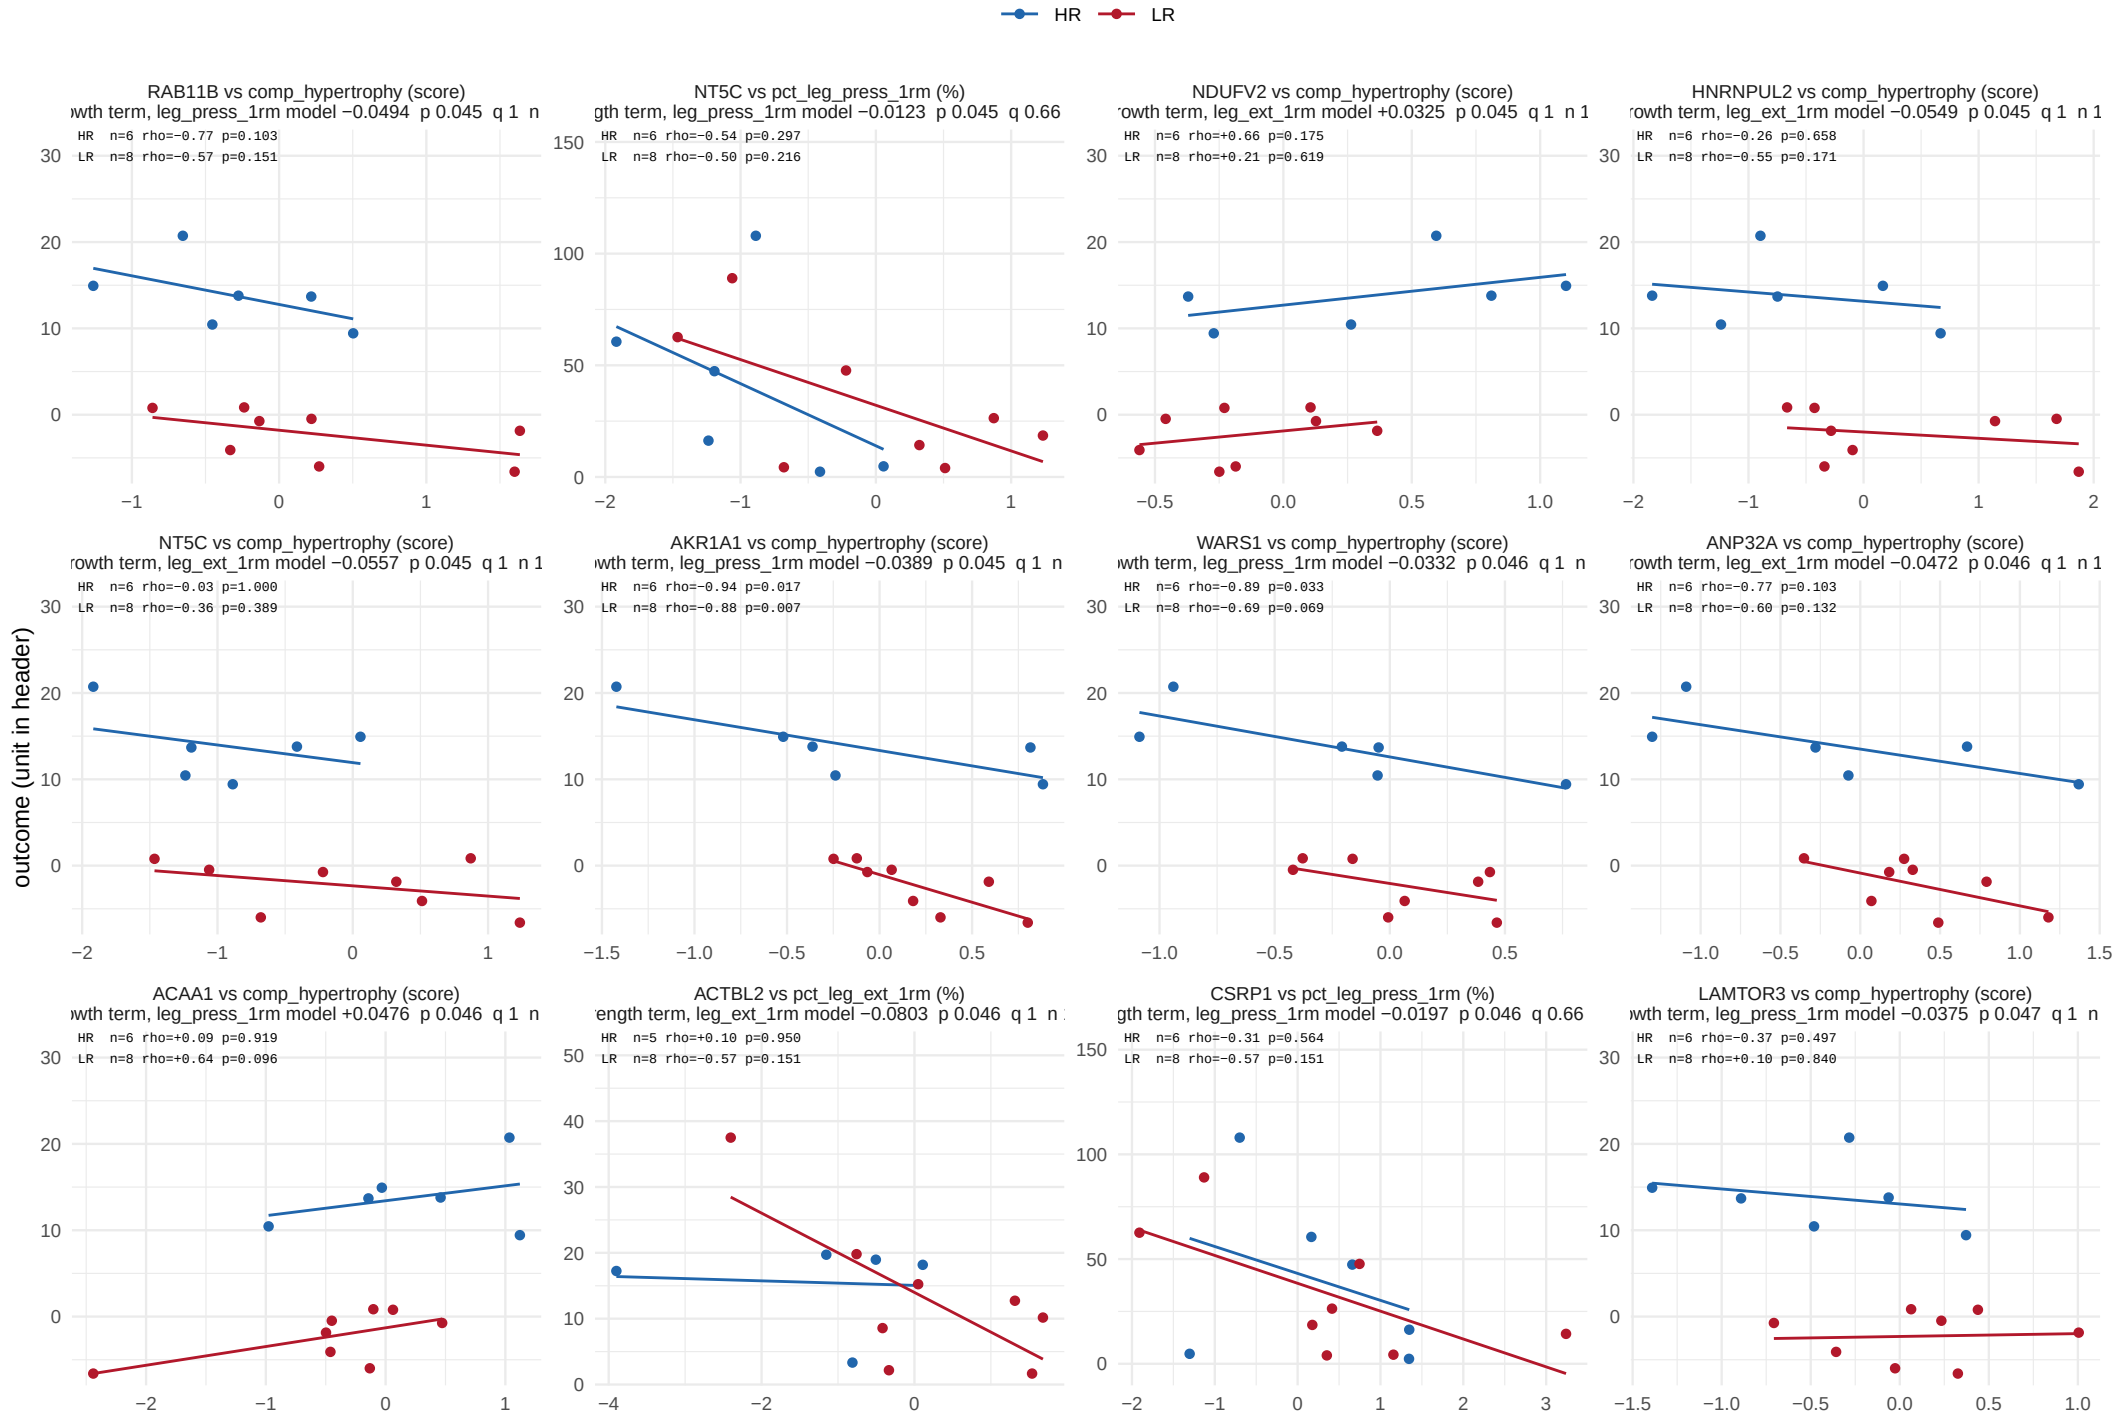

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, training window


311 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 25 of 26.

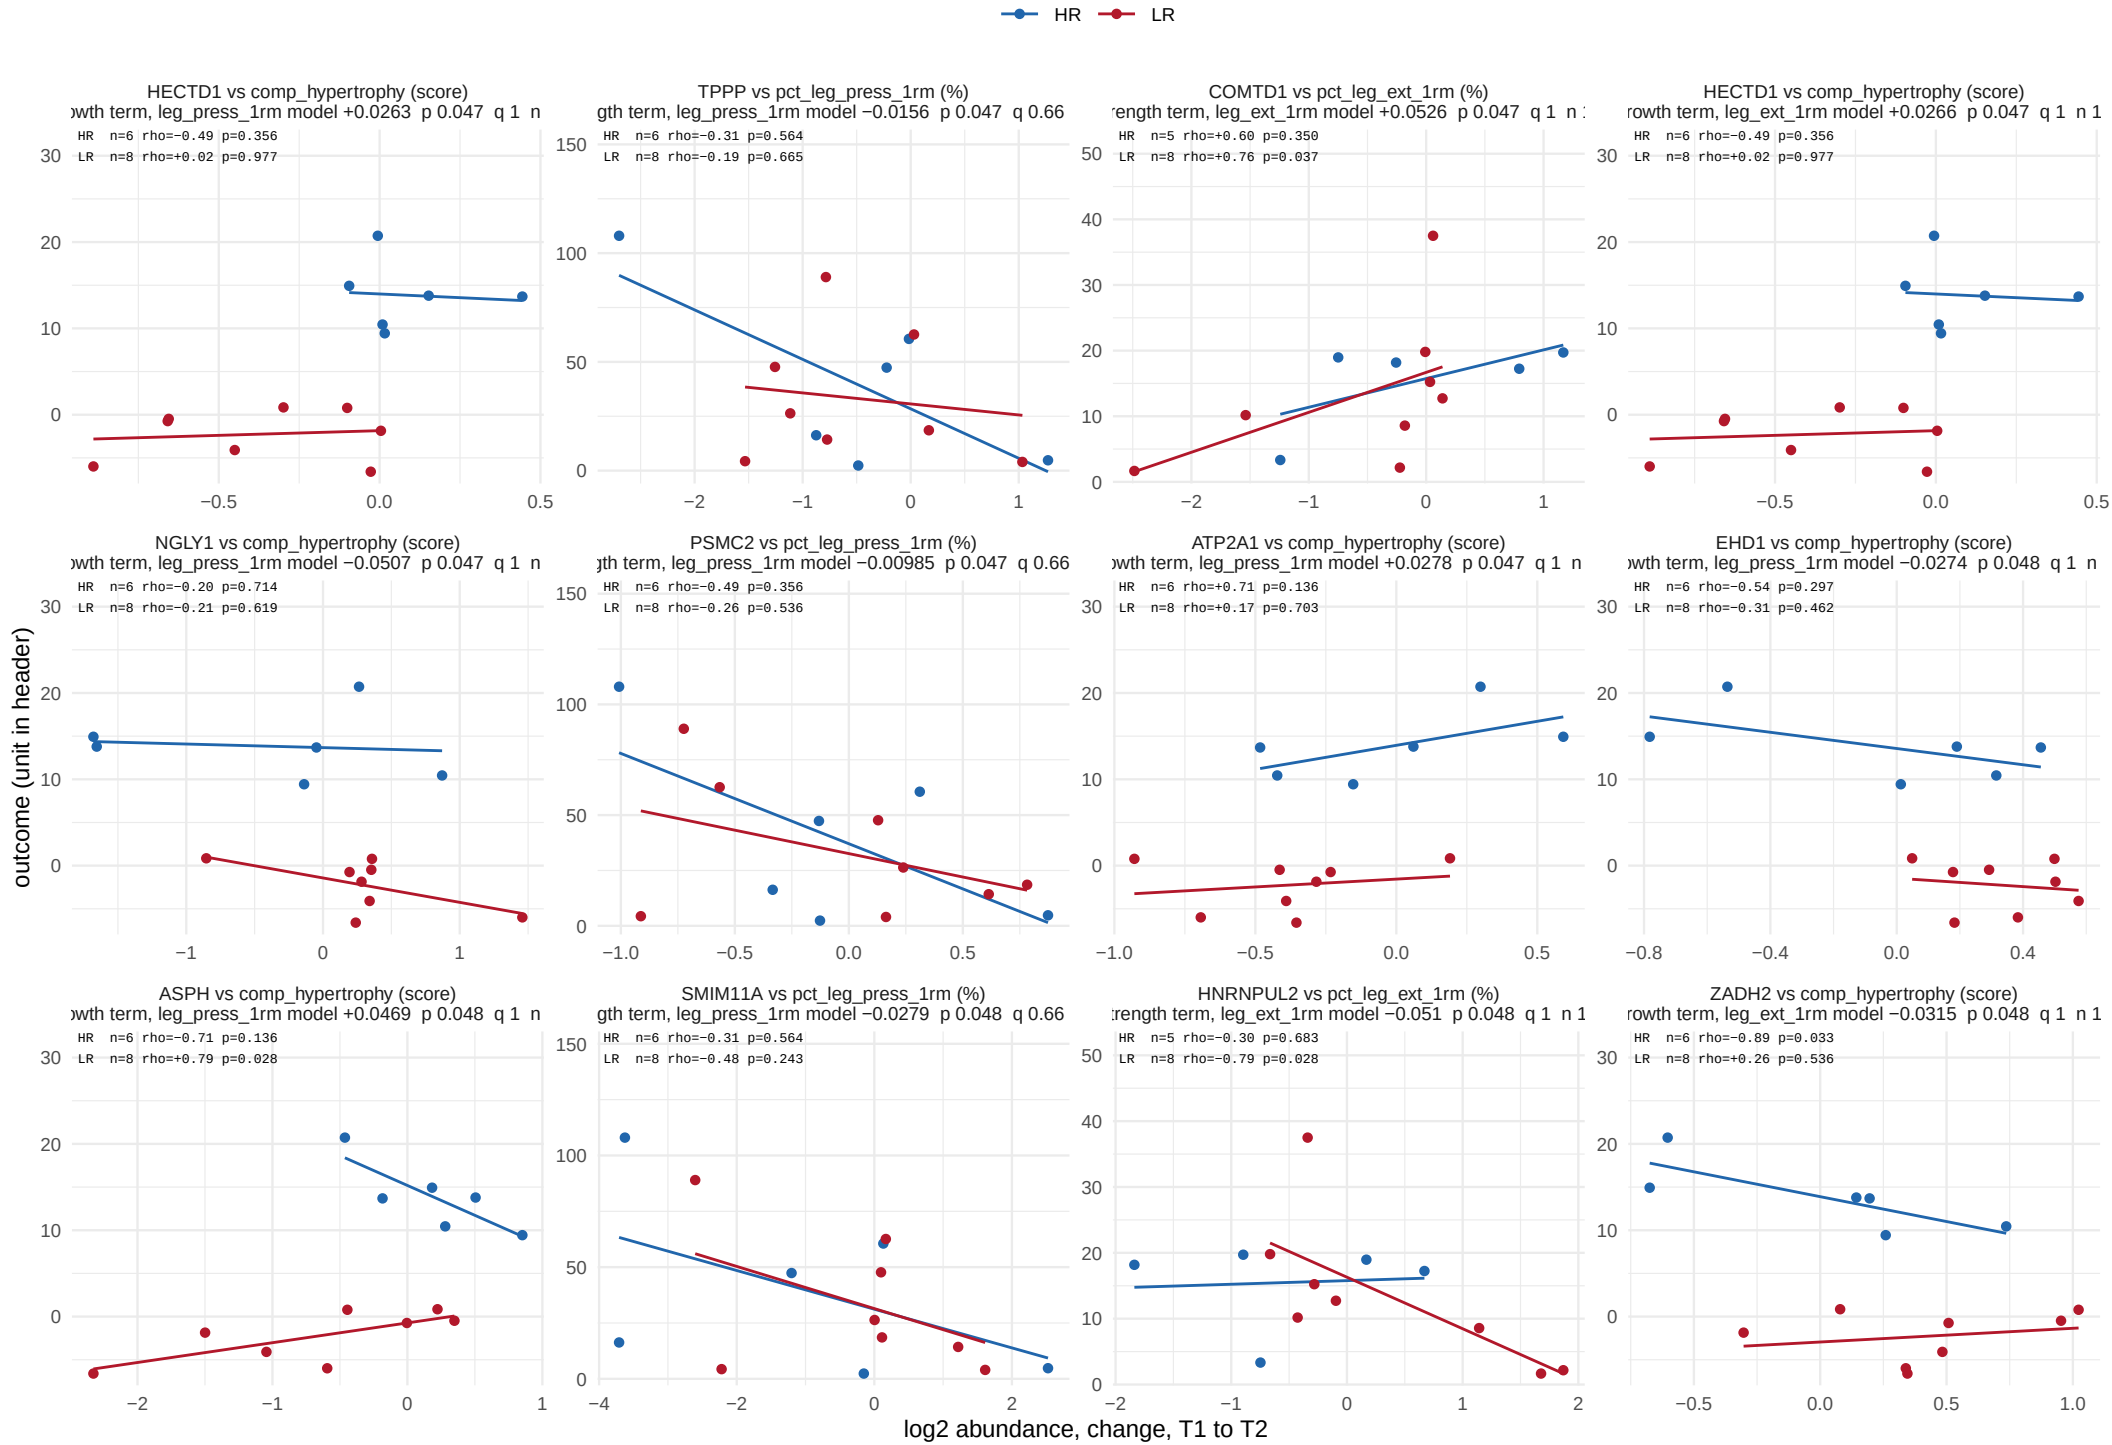

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, training window


311 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 26 of 26.

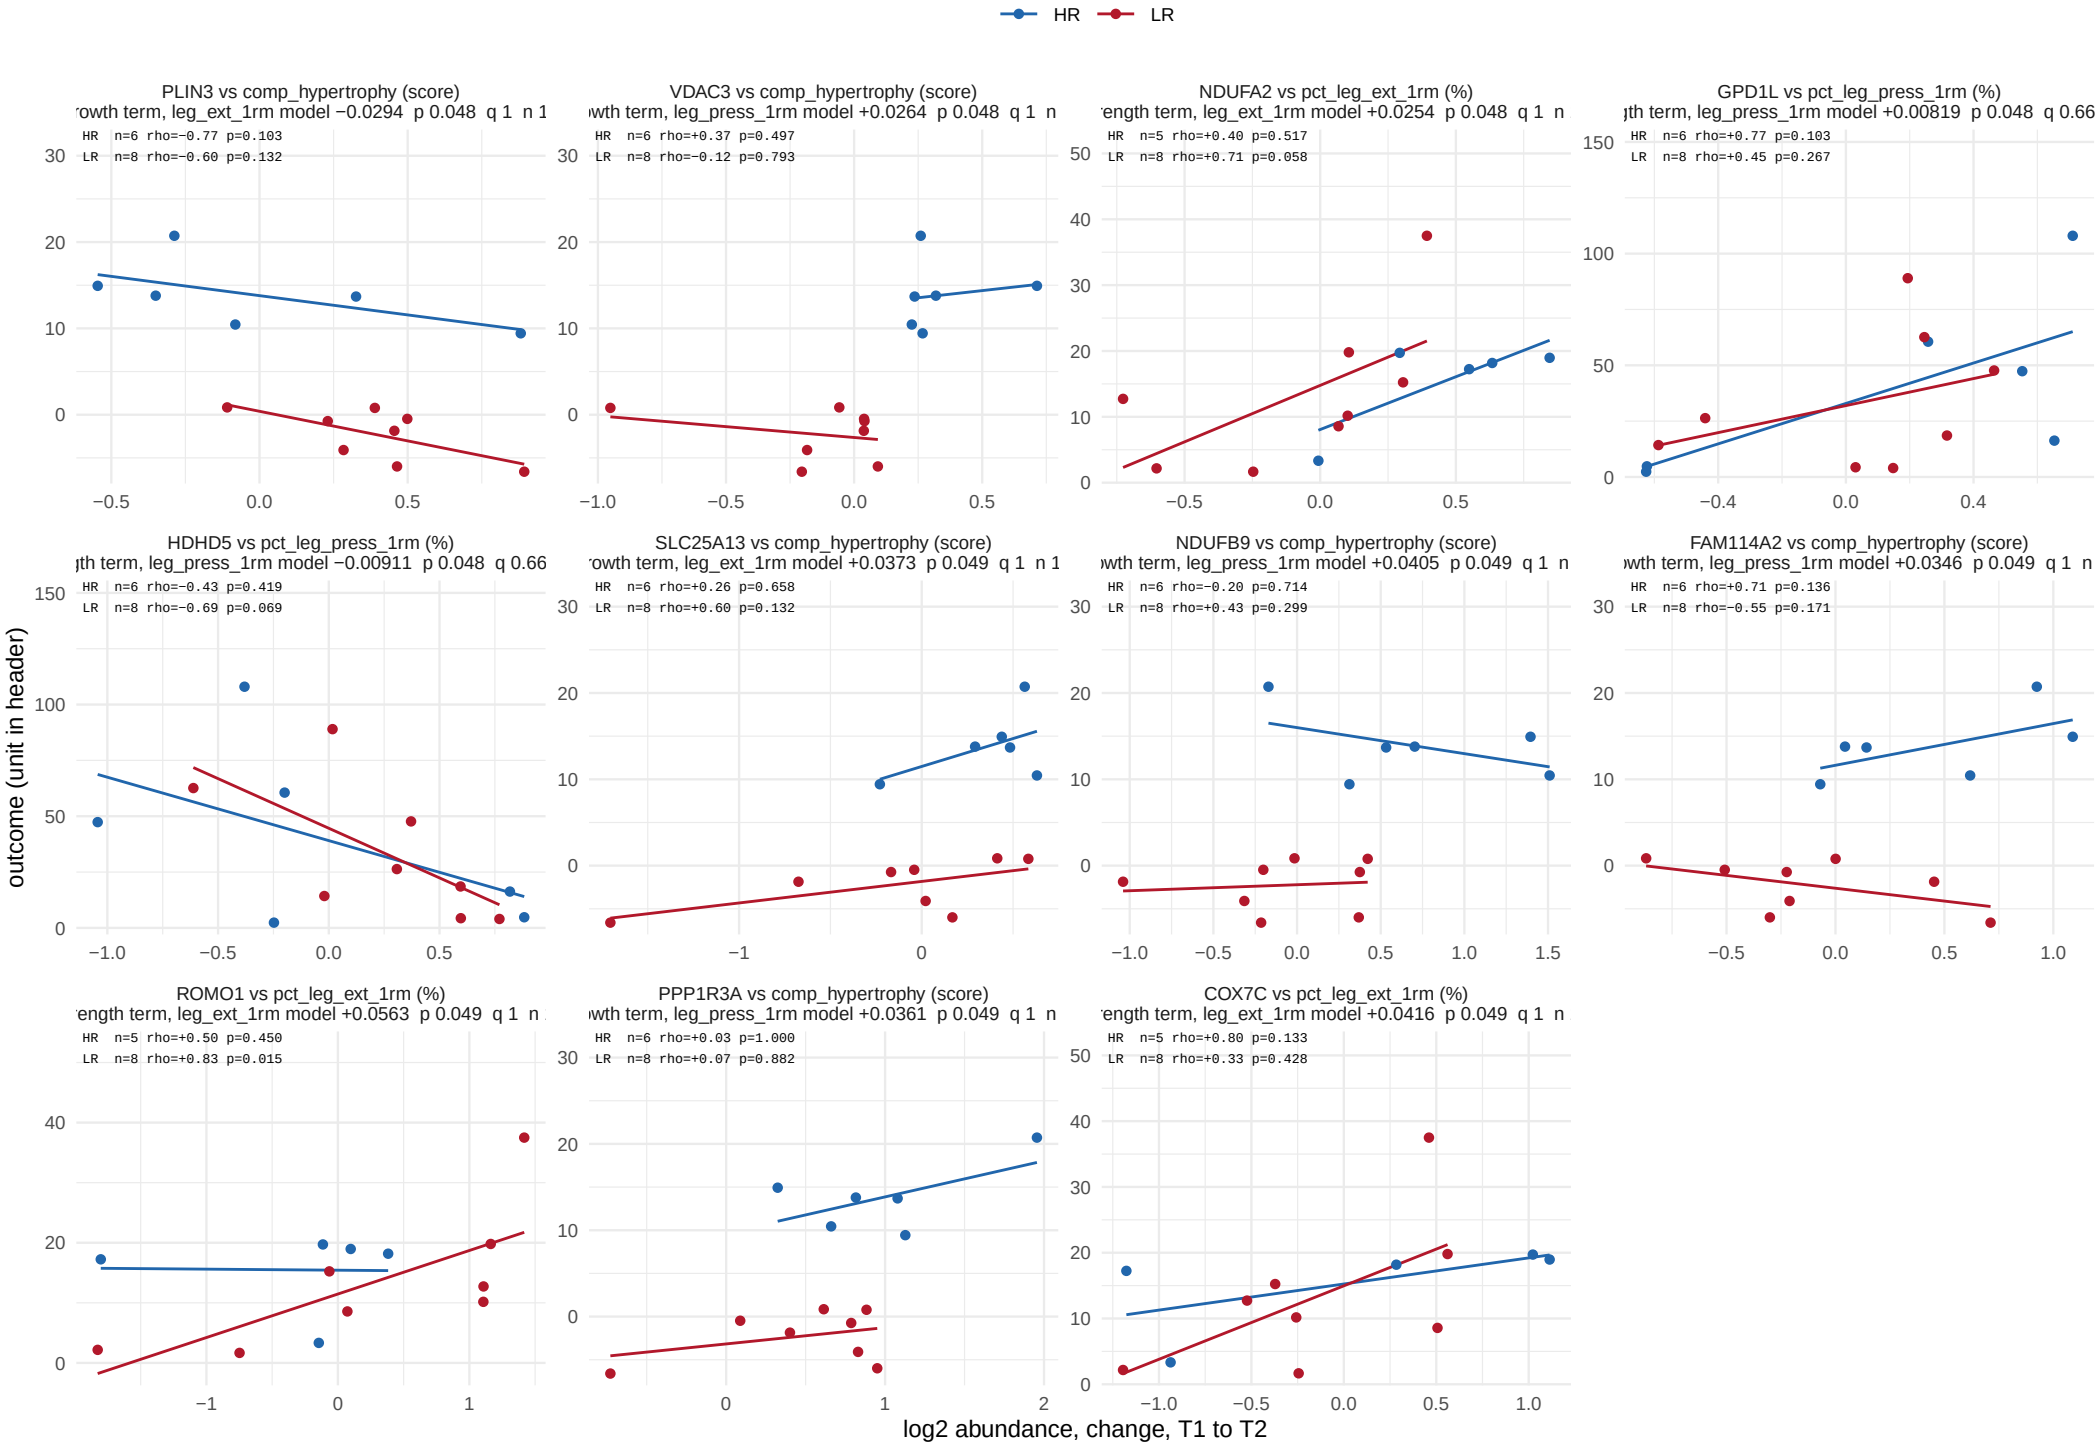

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, baseline window


387 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 1 of 33.

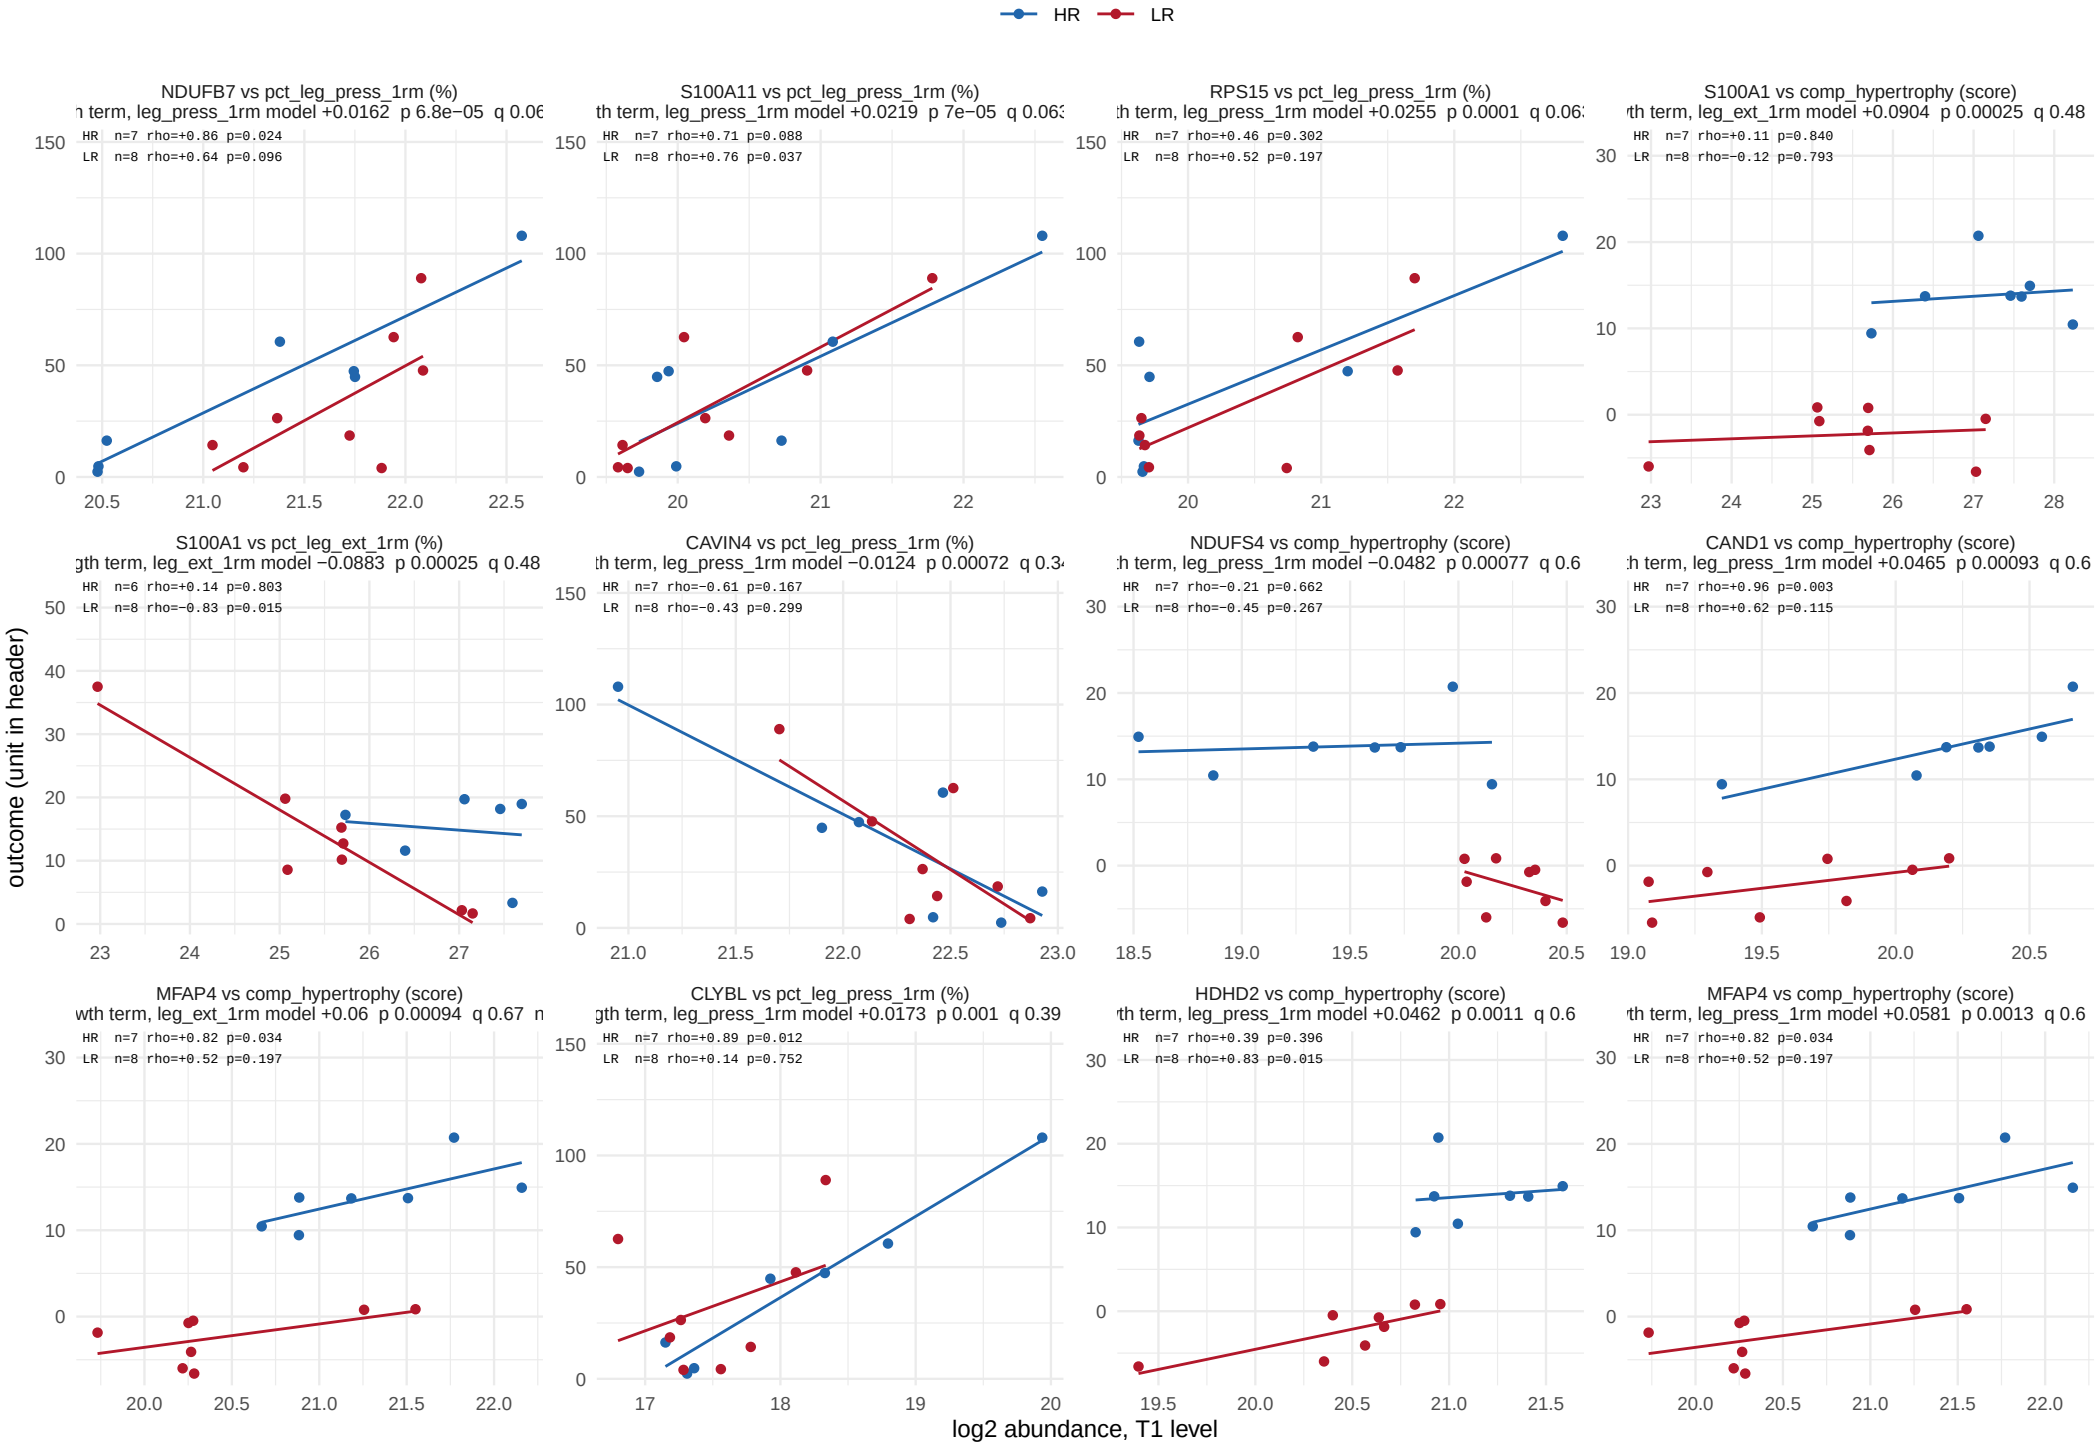

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, baseline window


387 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 2 of 33.

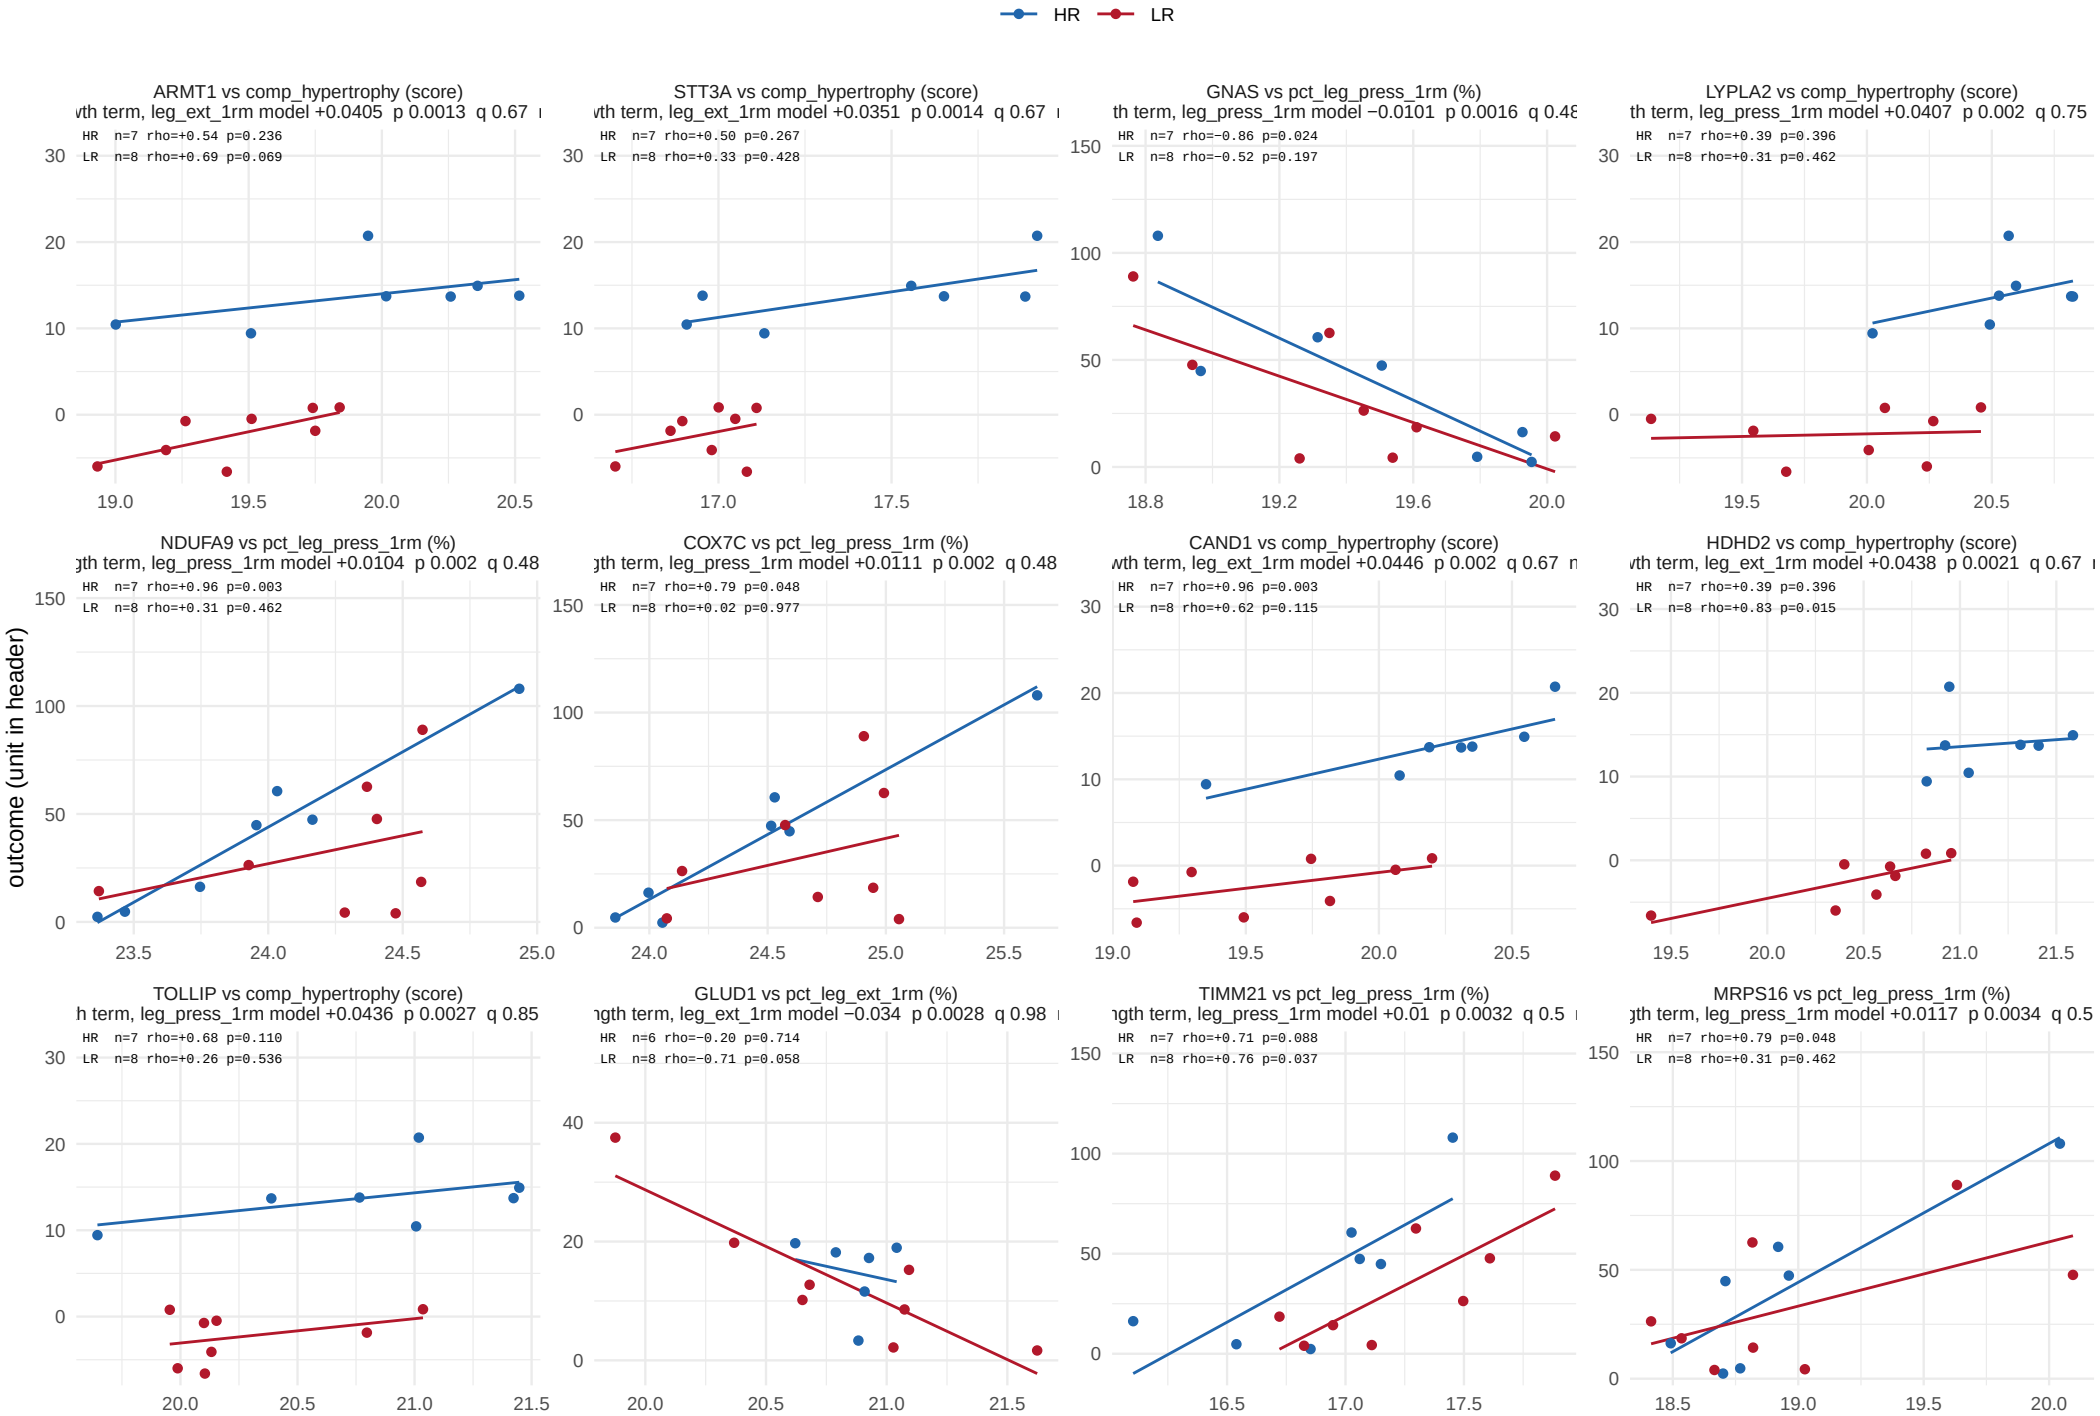

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, baseline window


387 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 3 of 33.

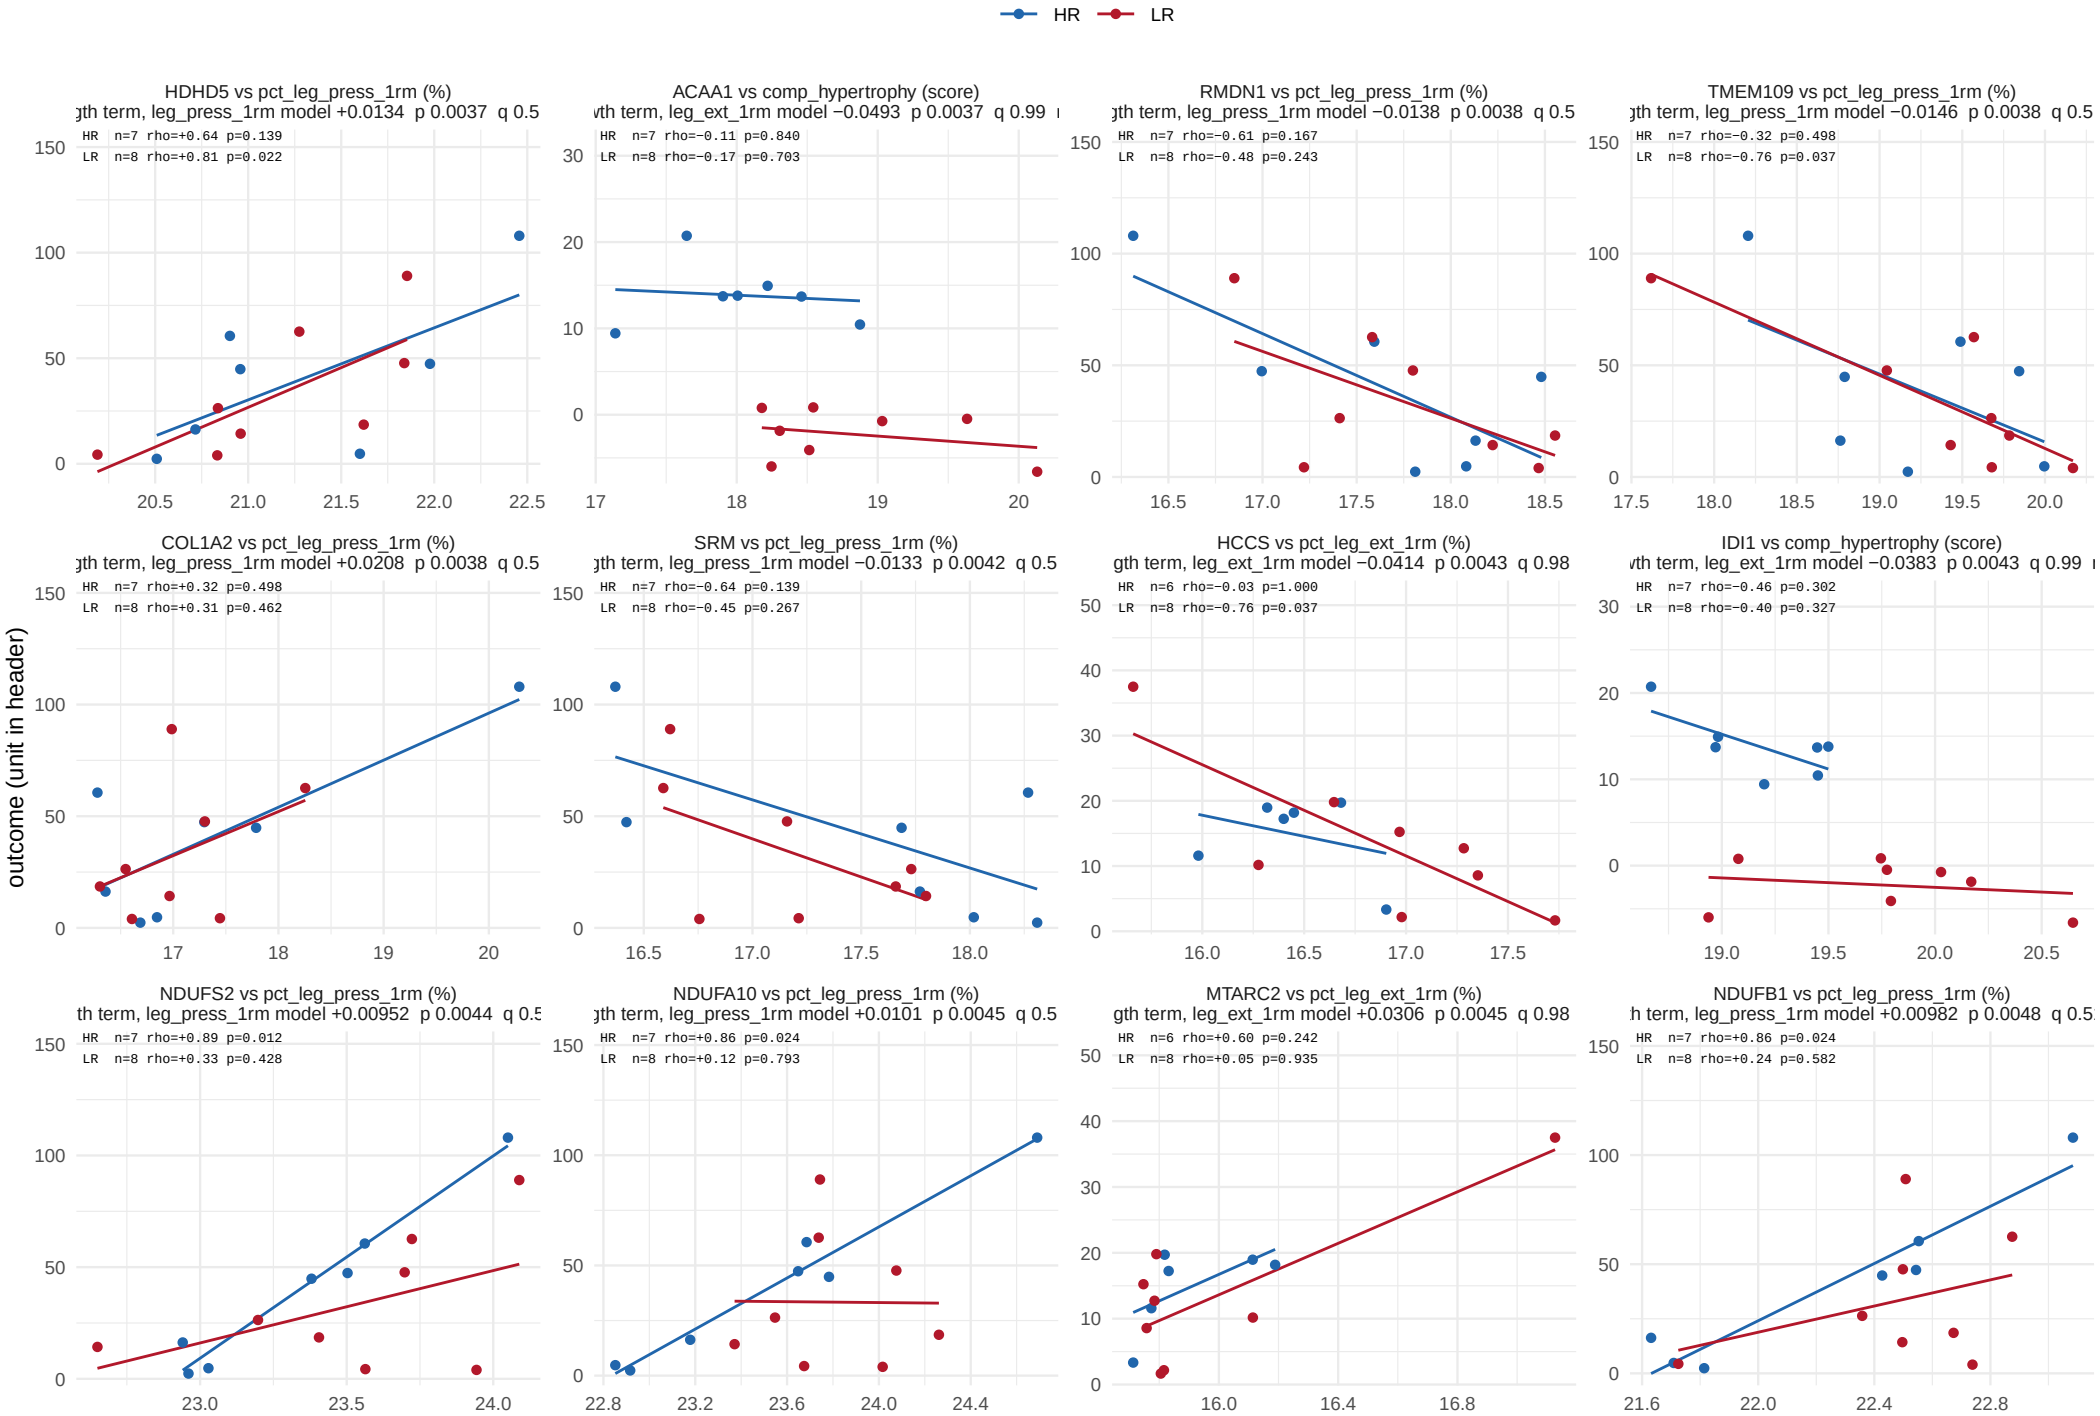

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, baseline window


387 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 4 of 33.

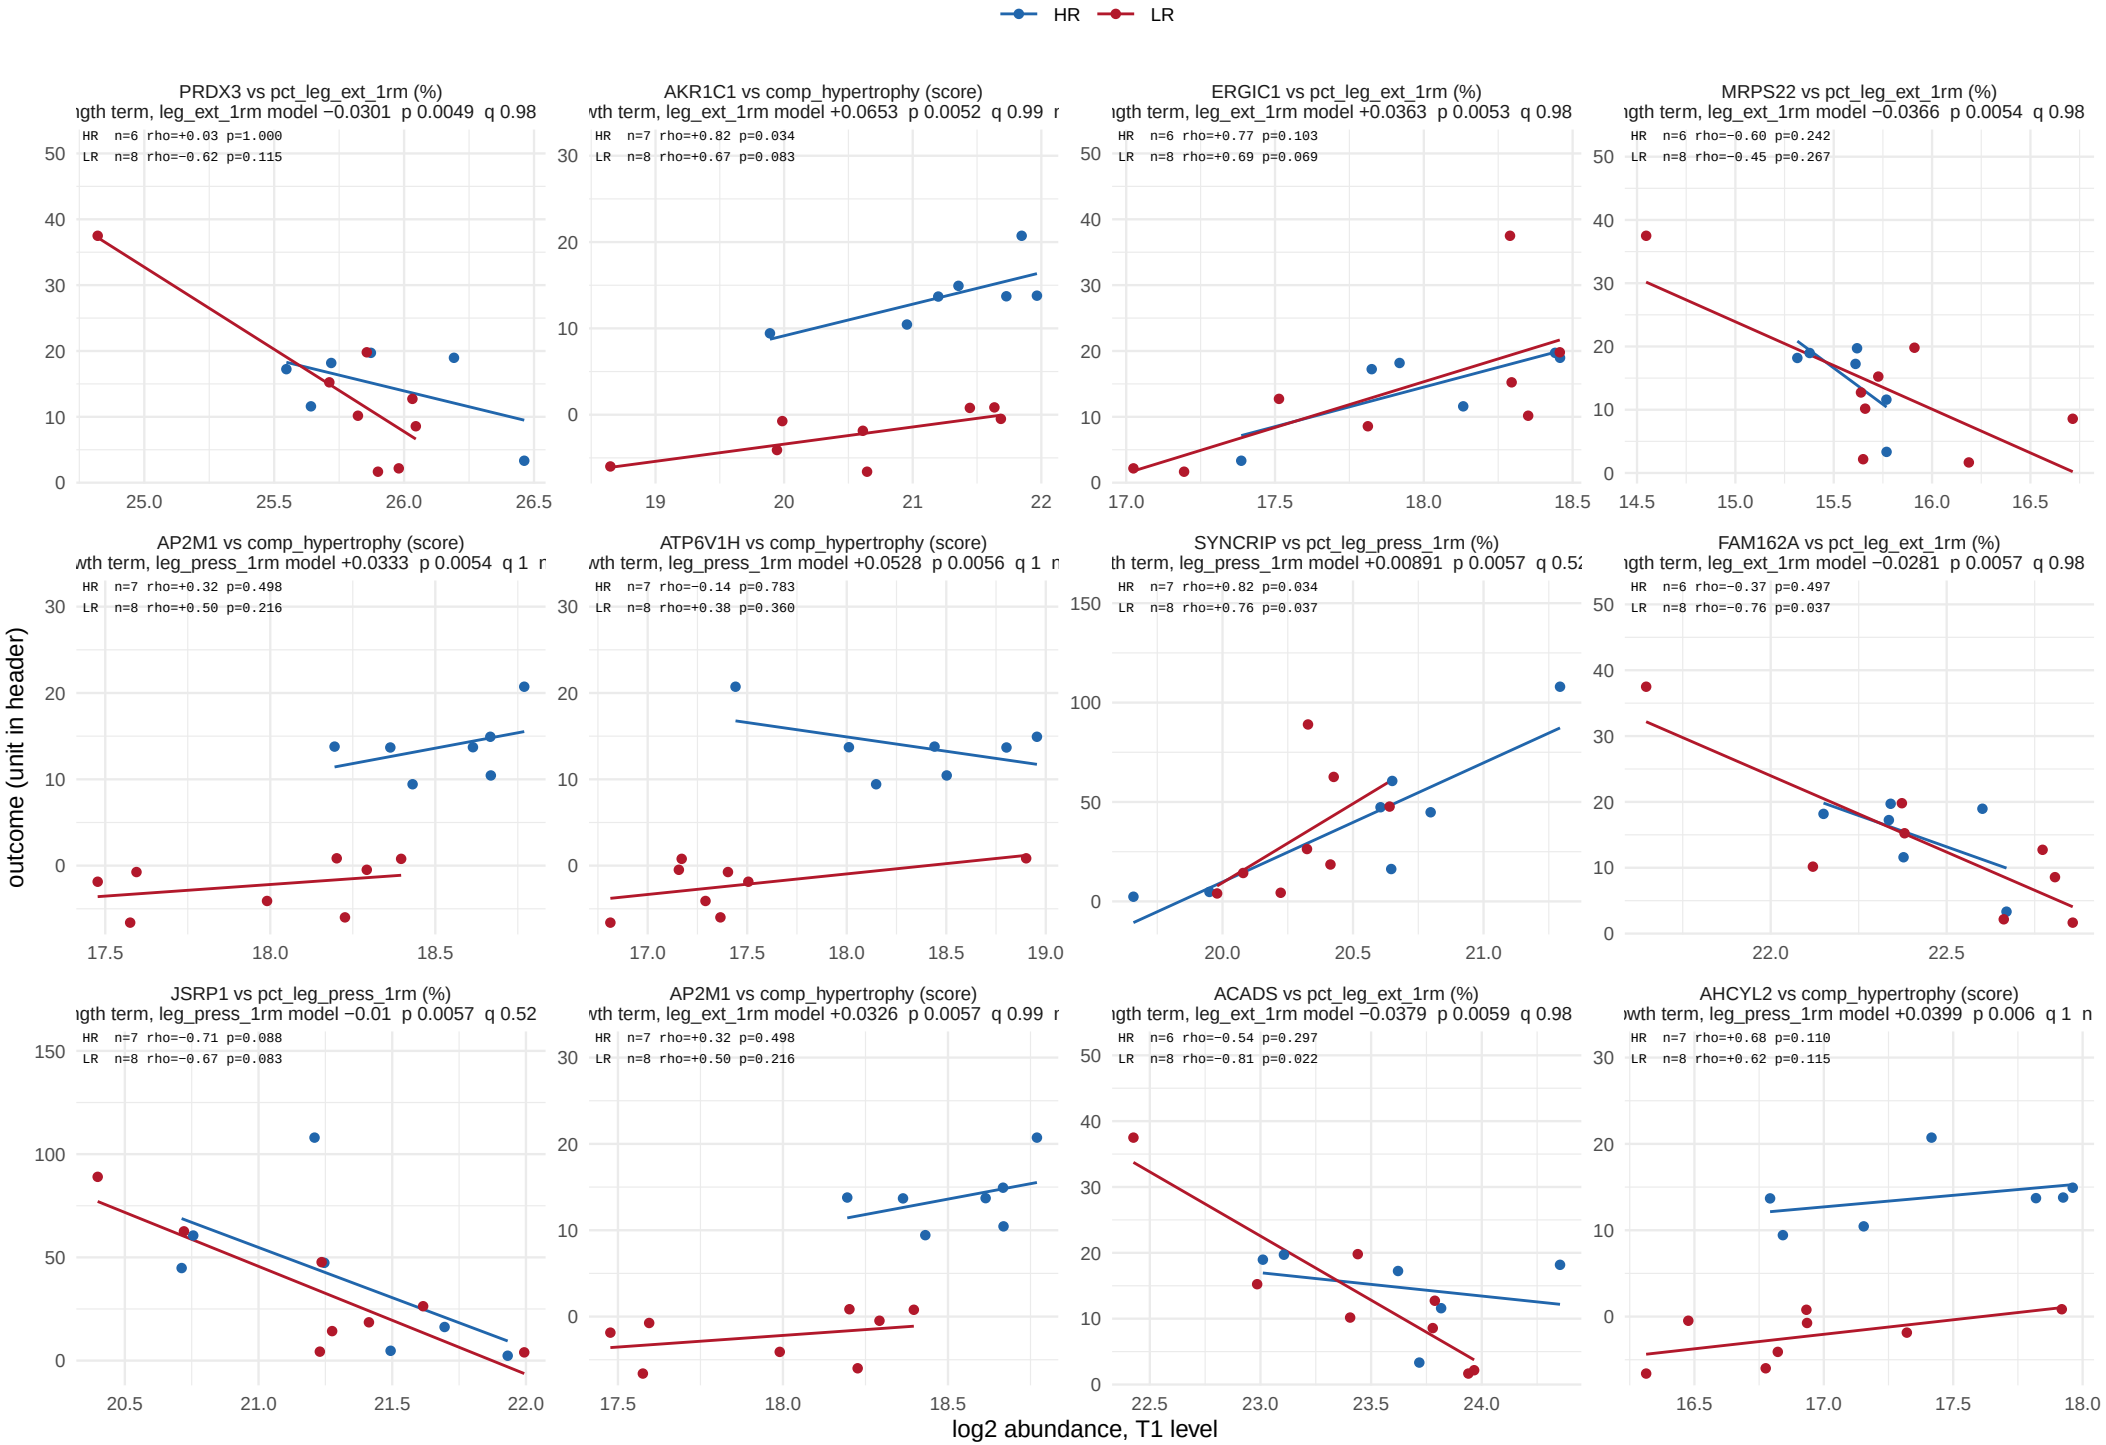

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, baseline window


387 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 5 of 33.

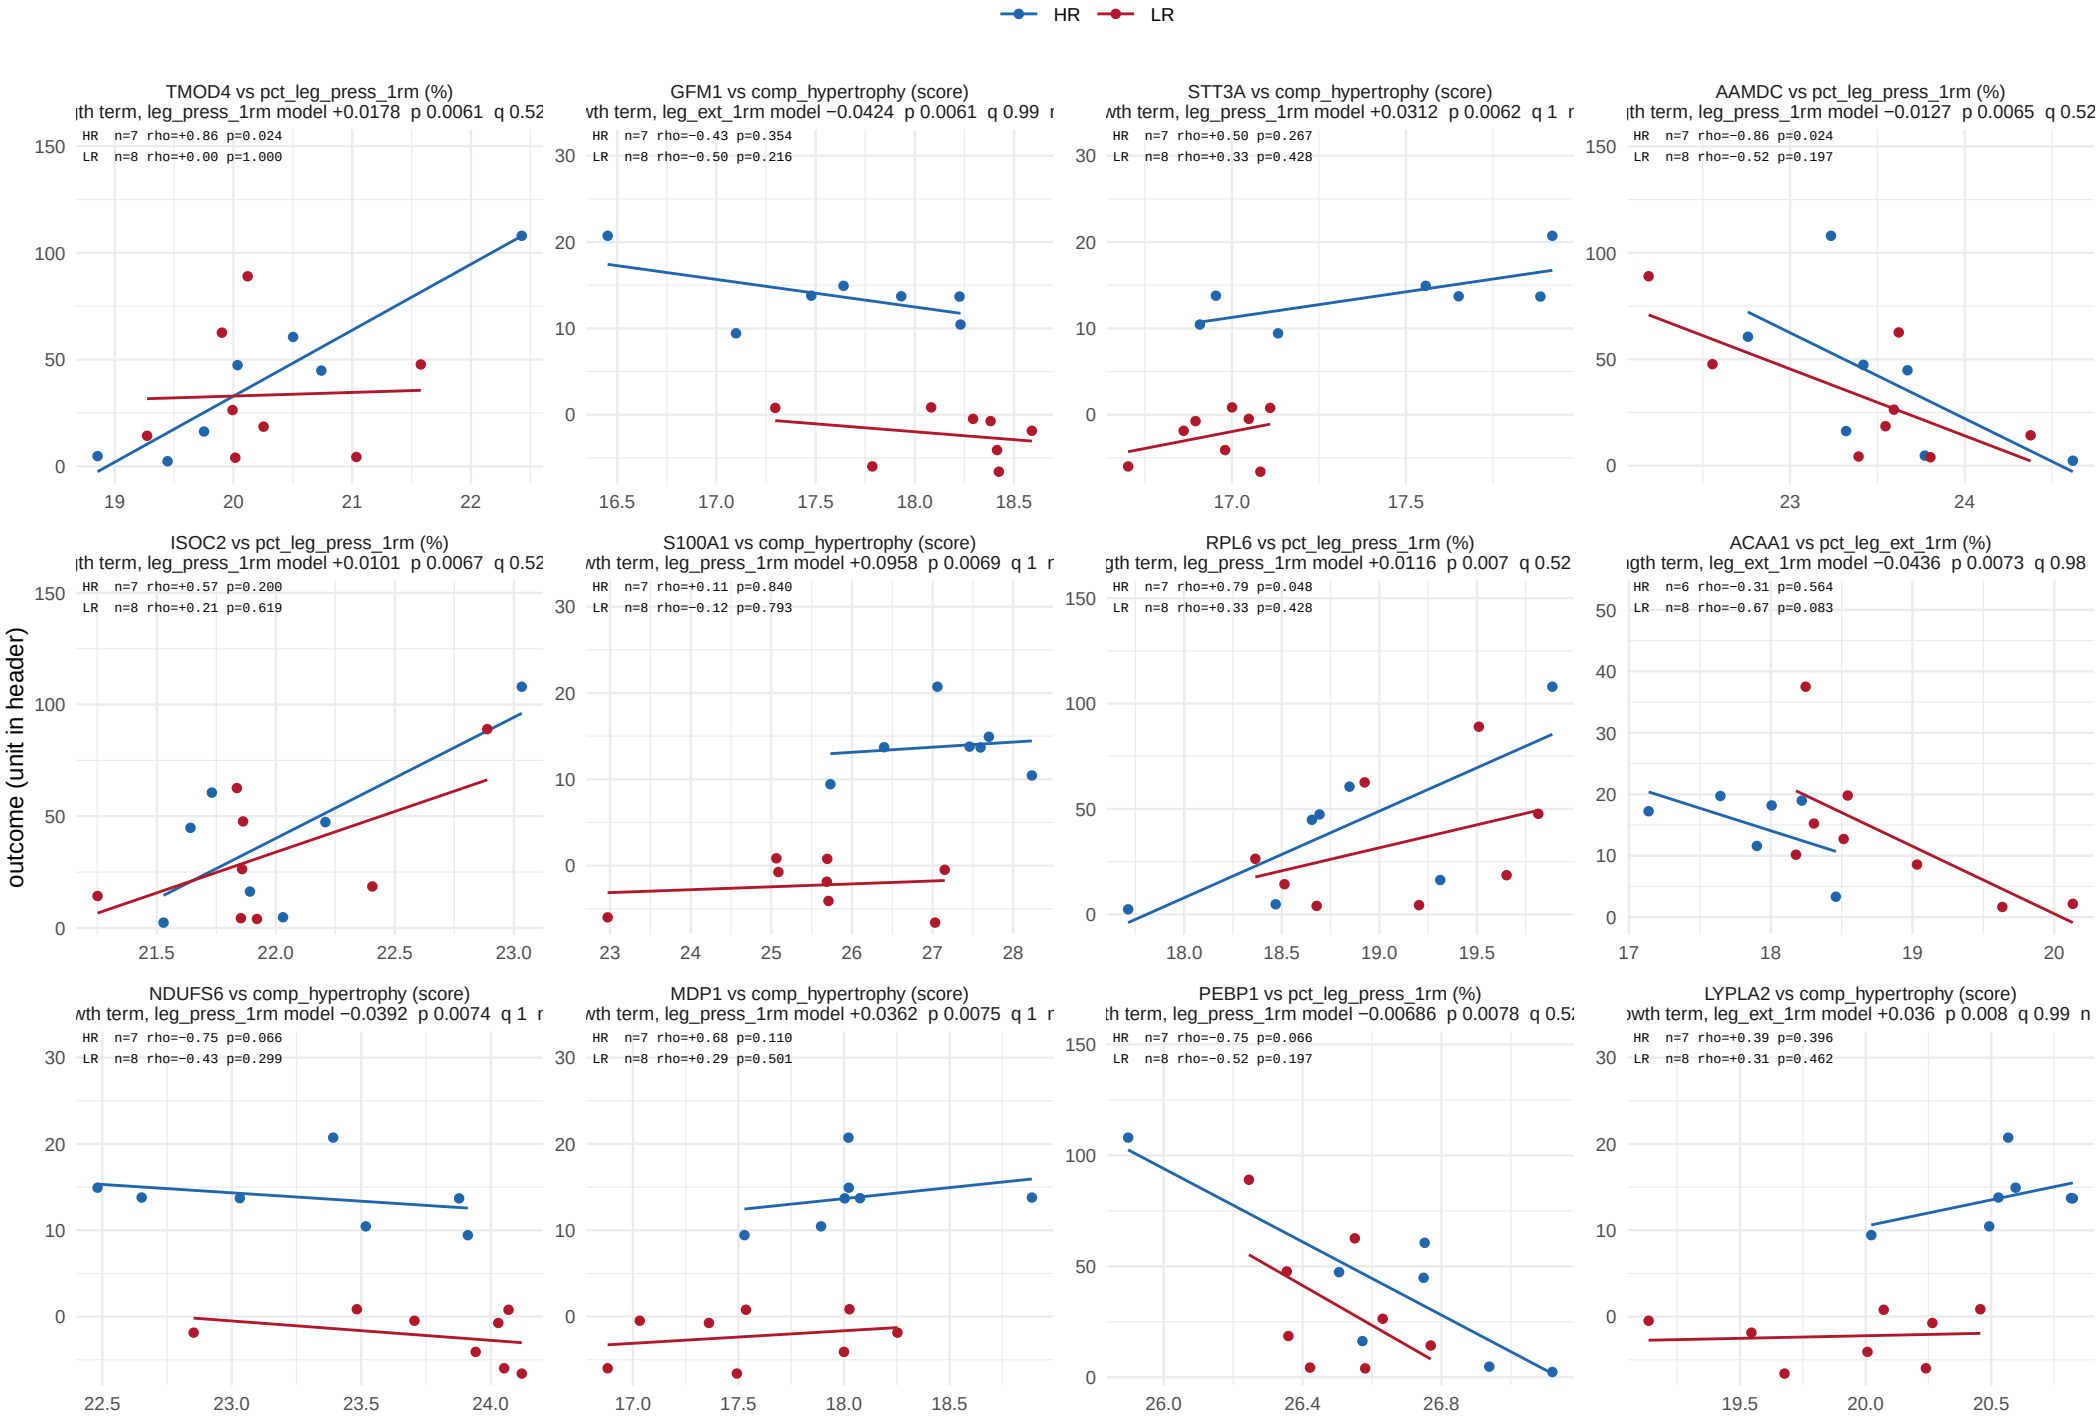

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, baseline window


387 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 6 of 33.

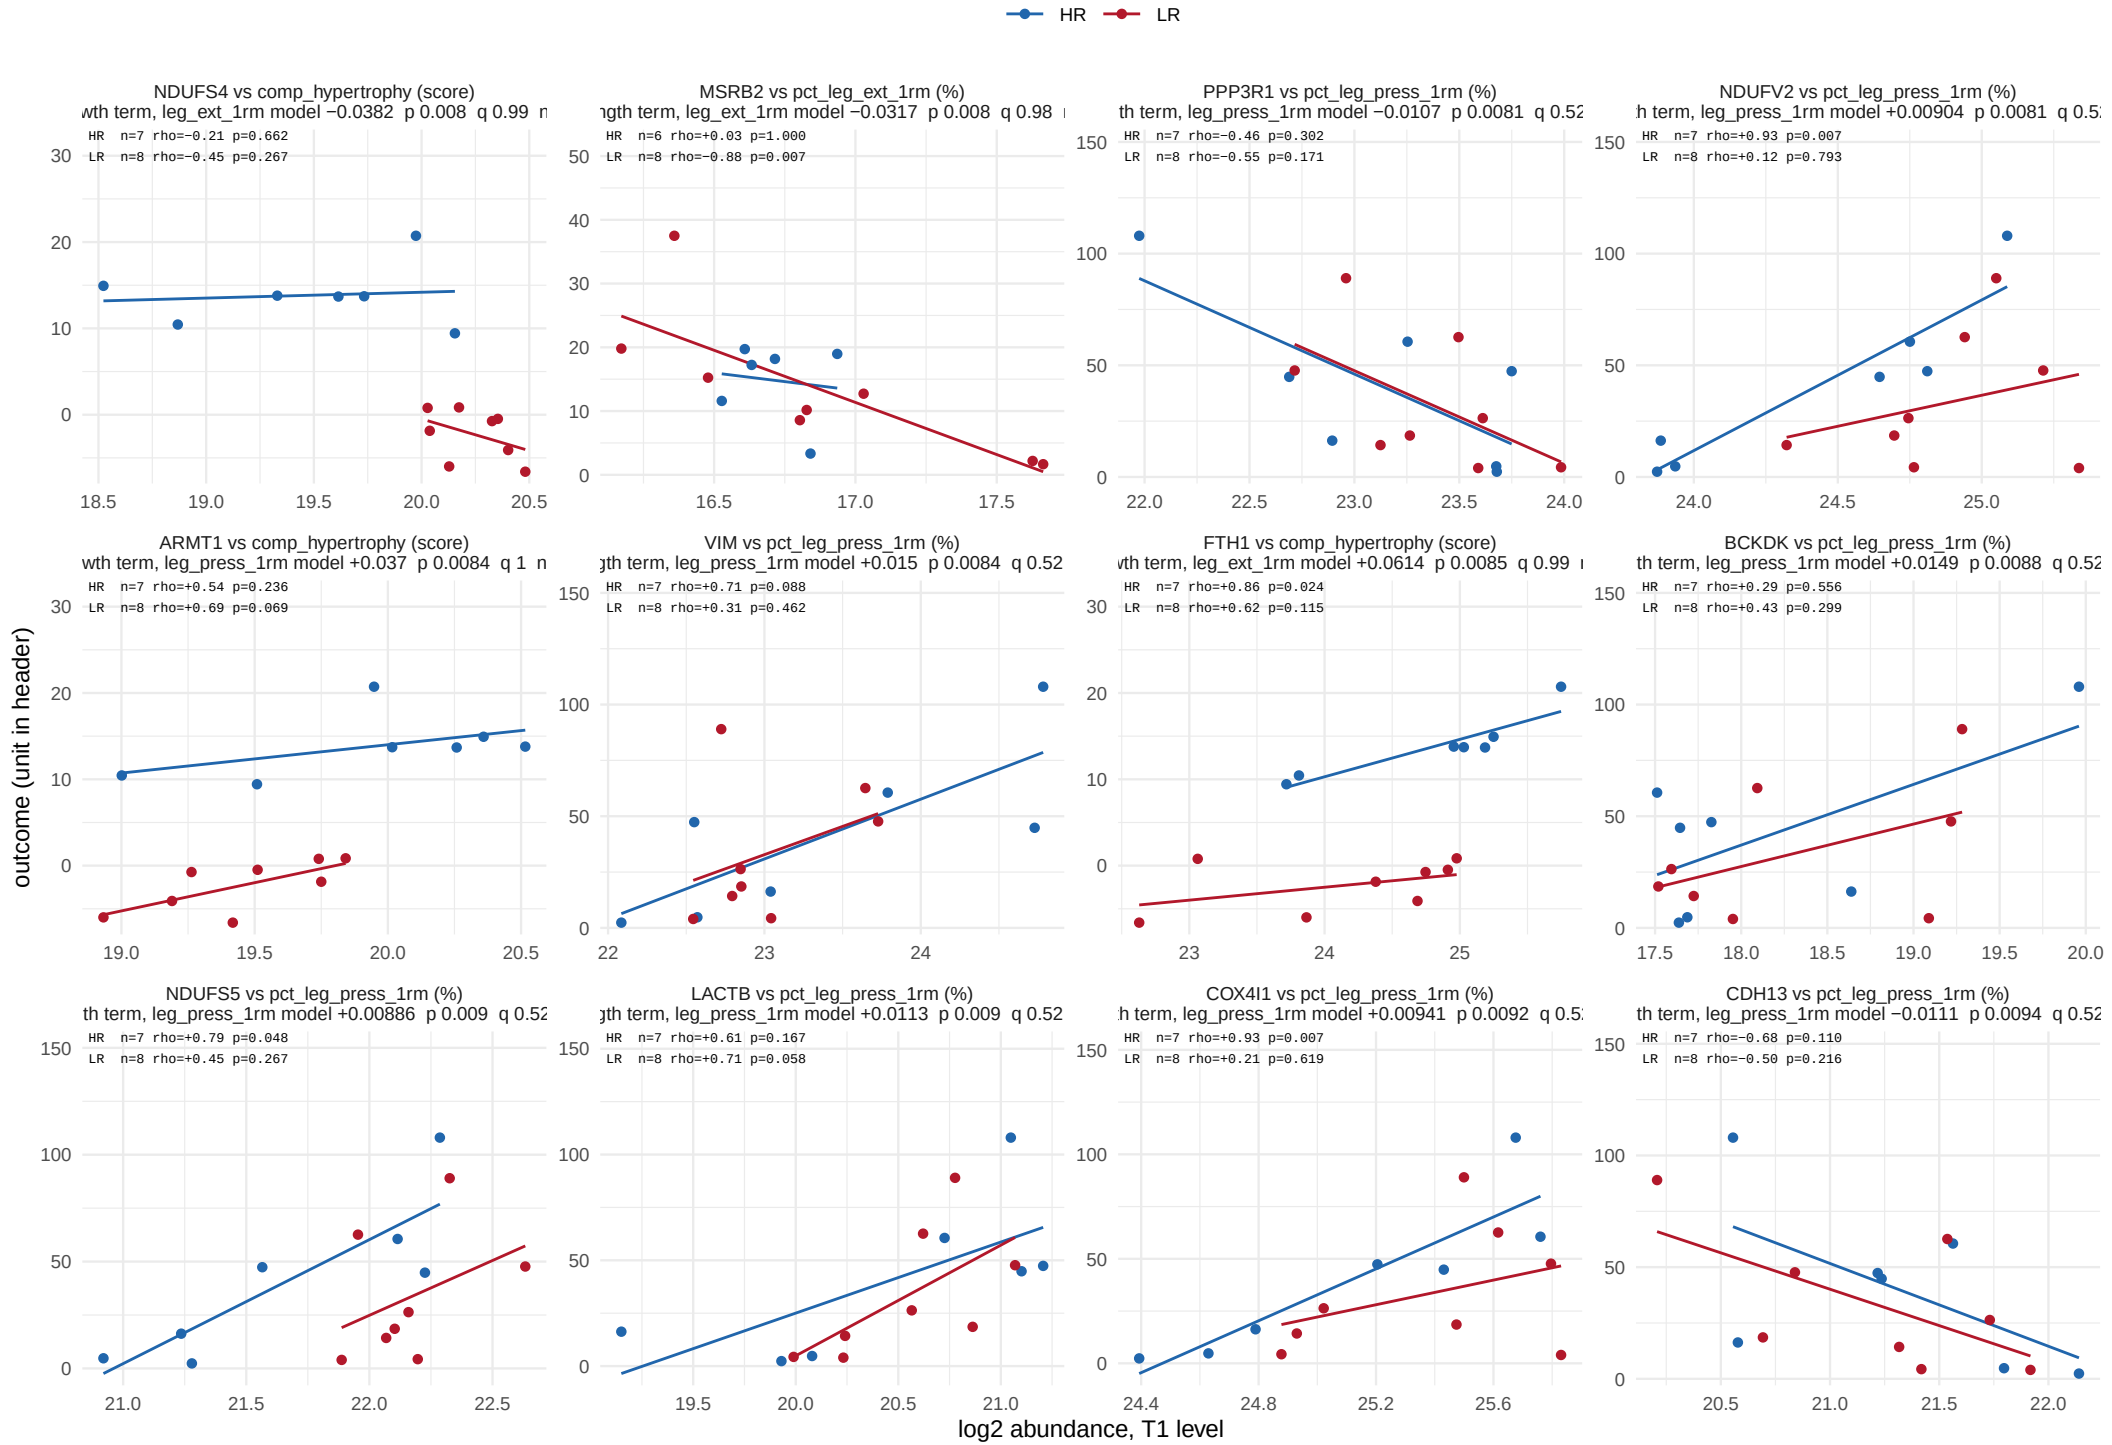

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, baseline window


387 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 7 of 33.

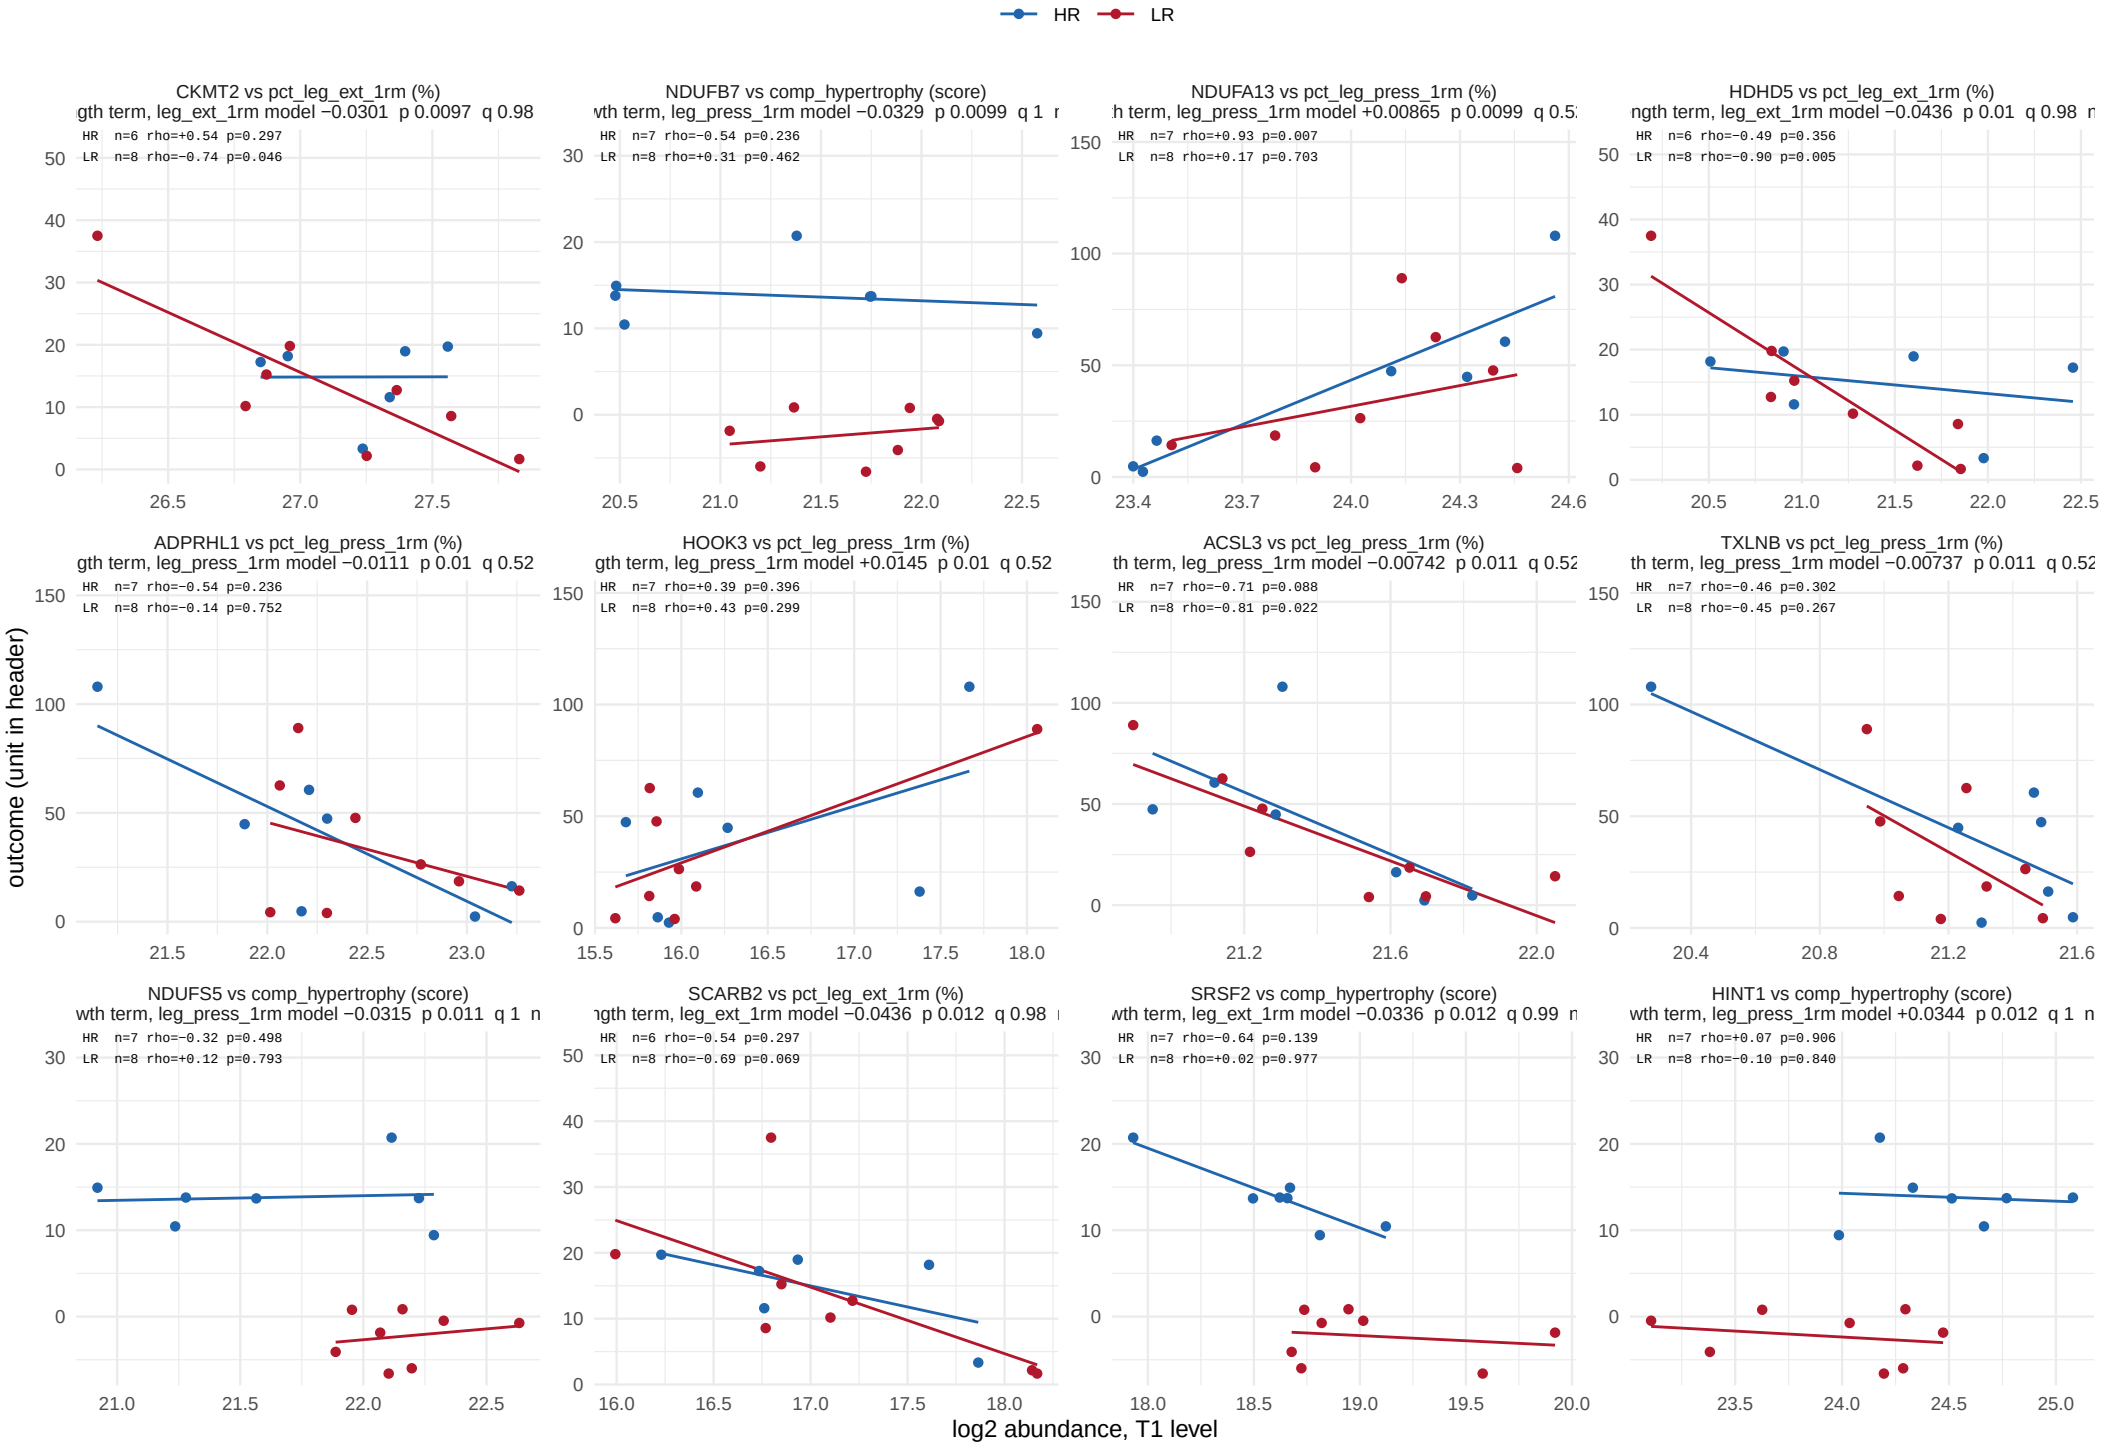

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, baseline window


387 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 8 of 33.

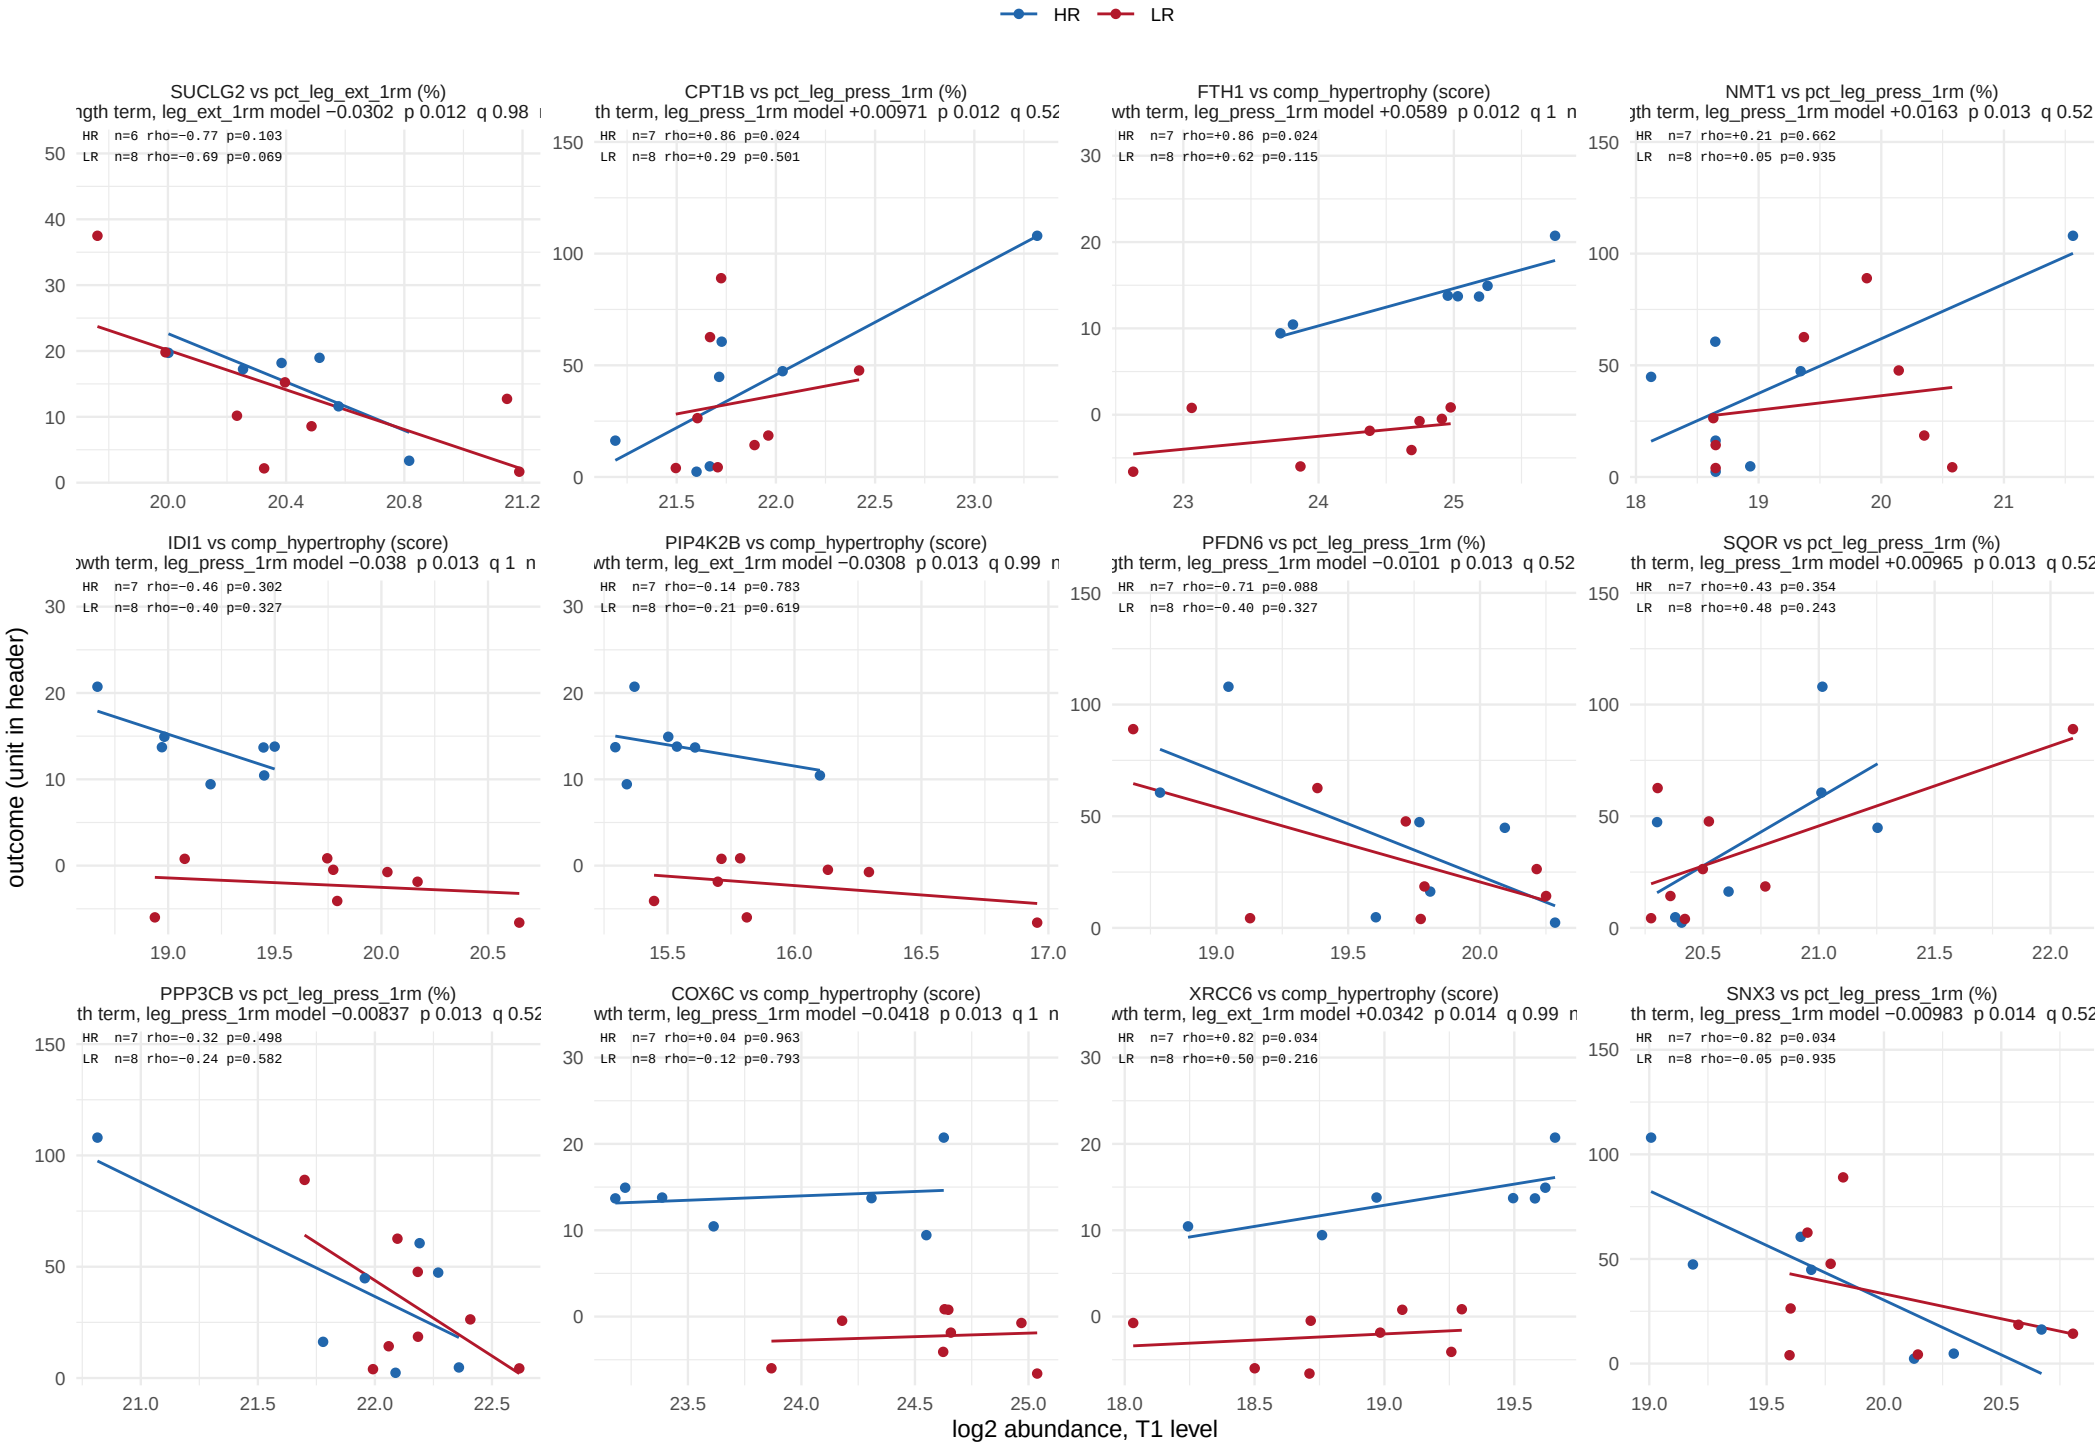

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, baseline window


387 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 9 of 33.

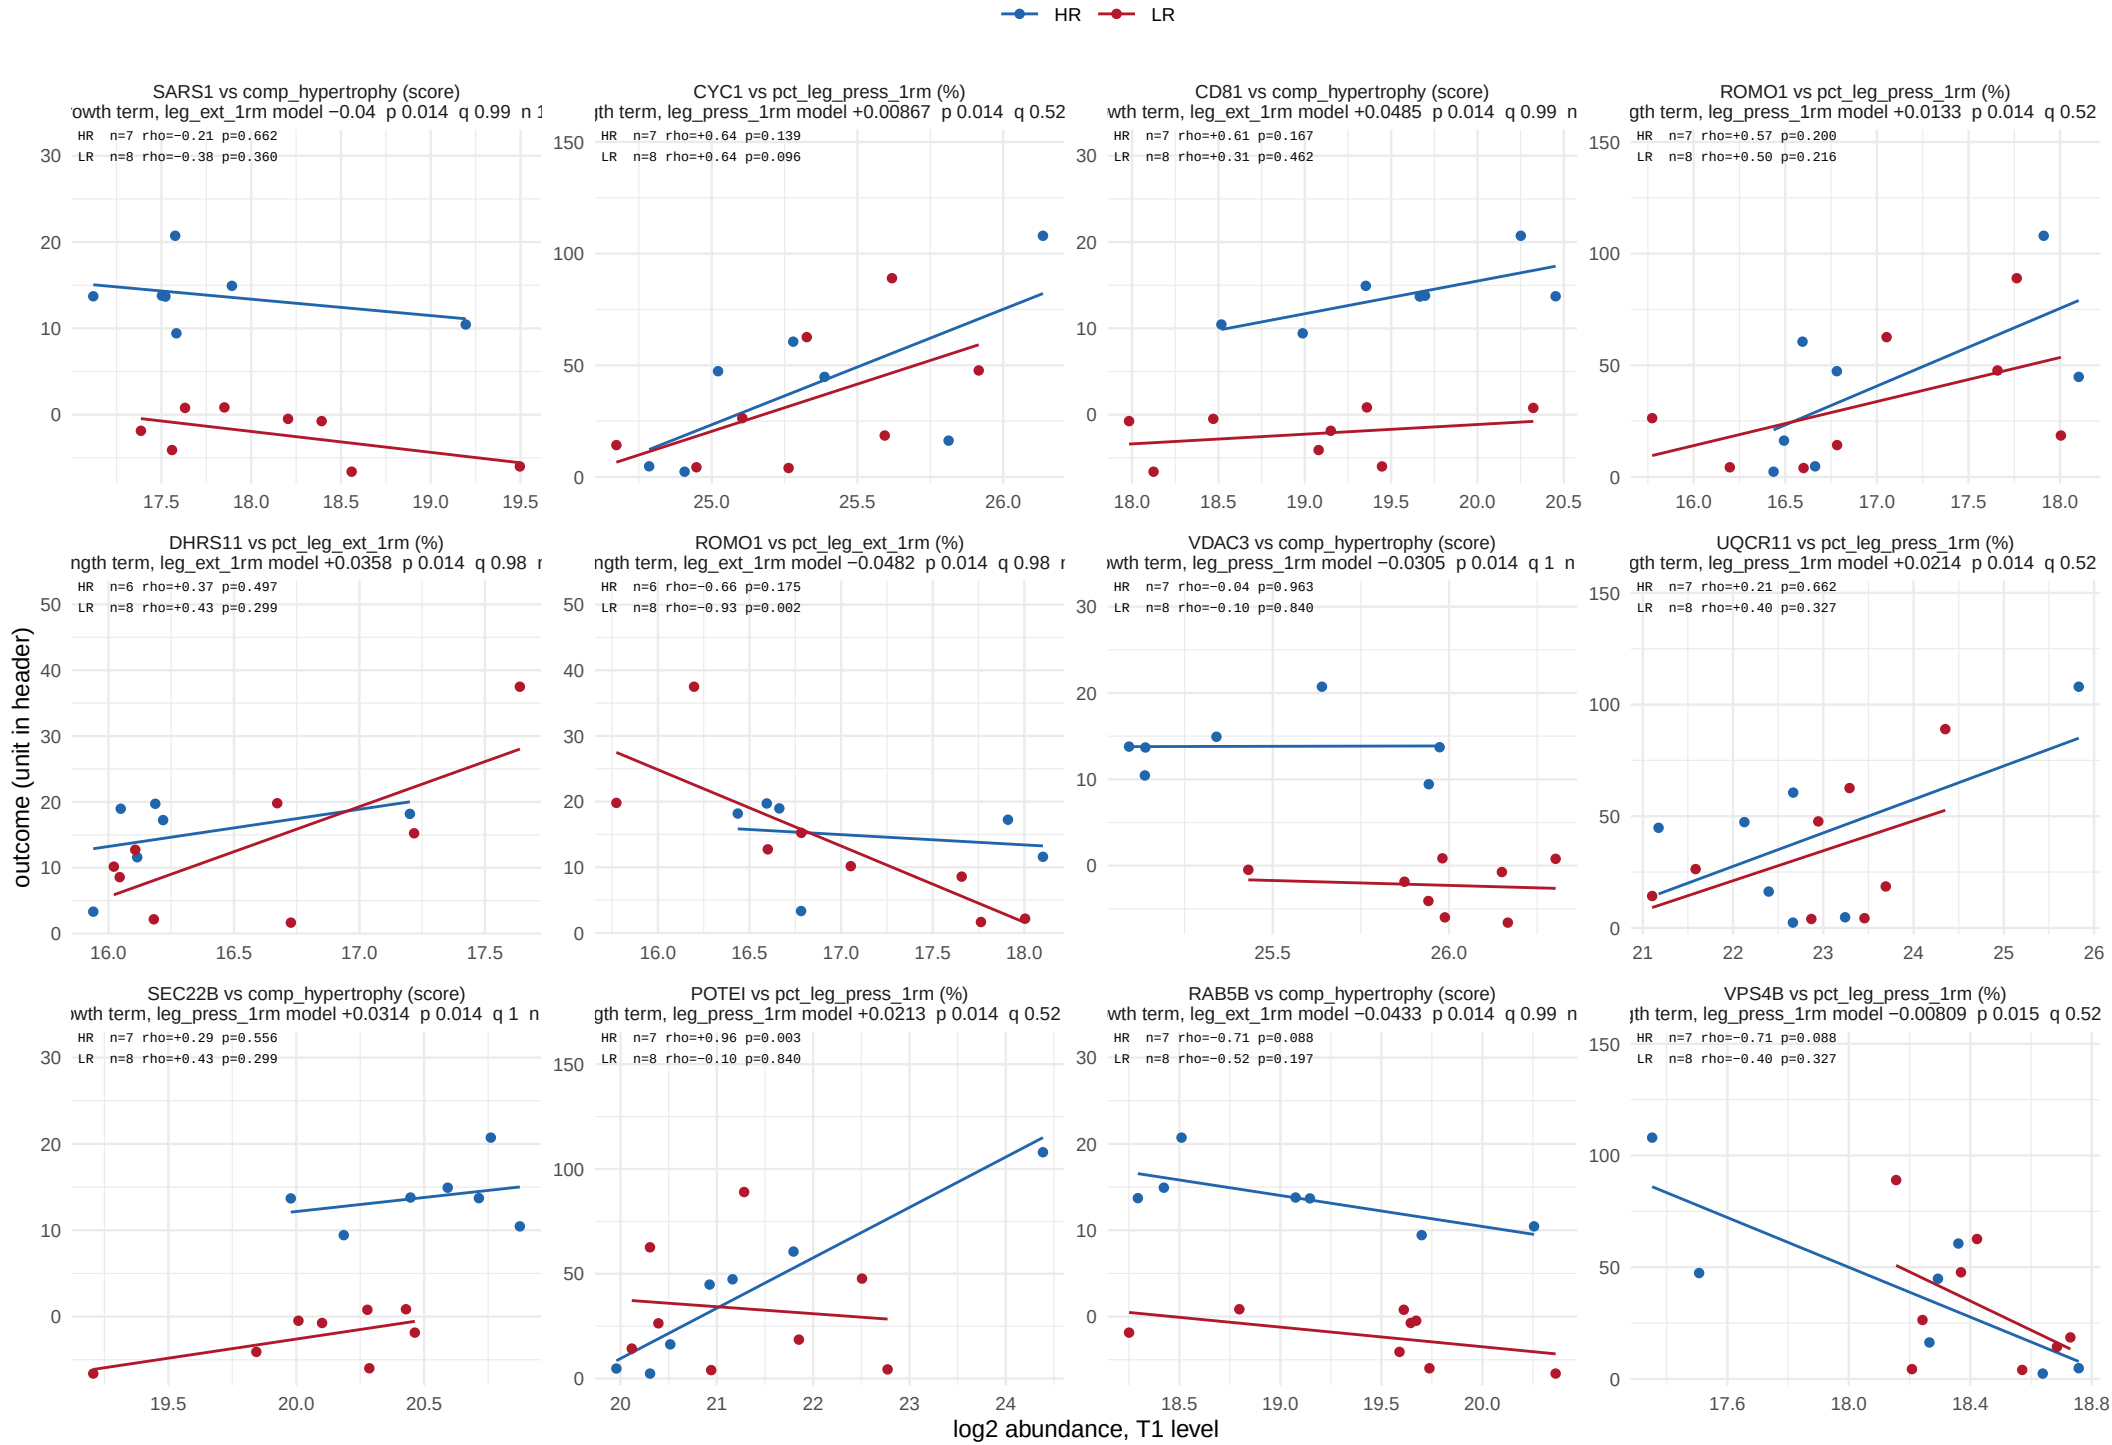

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, baseline window


387 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 10 of 33.

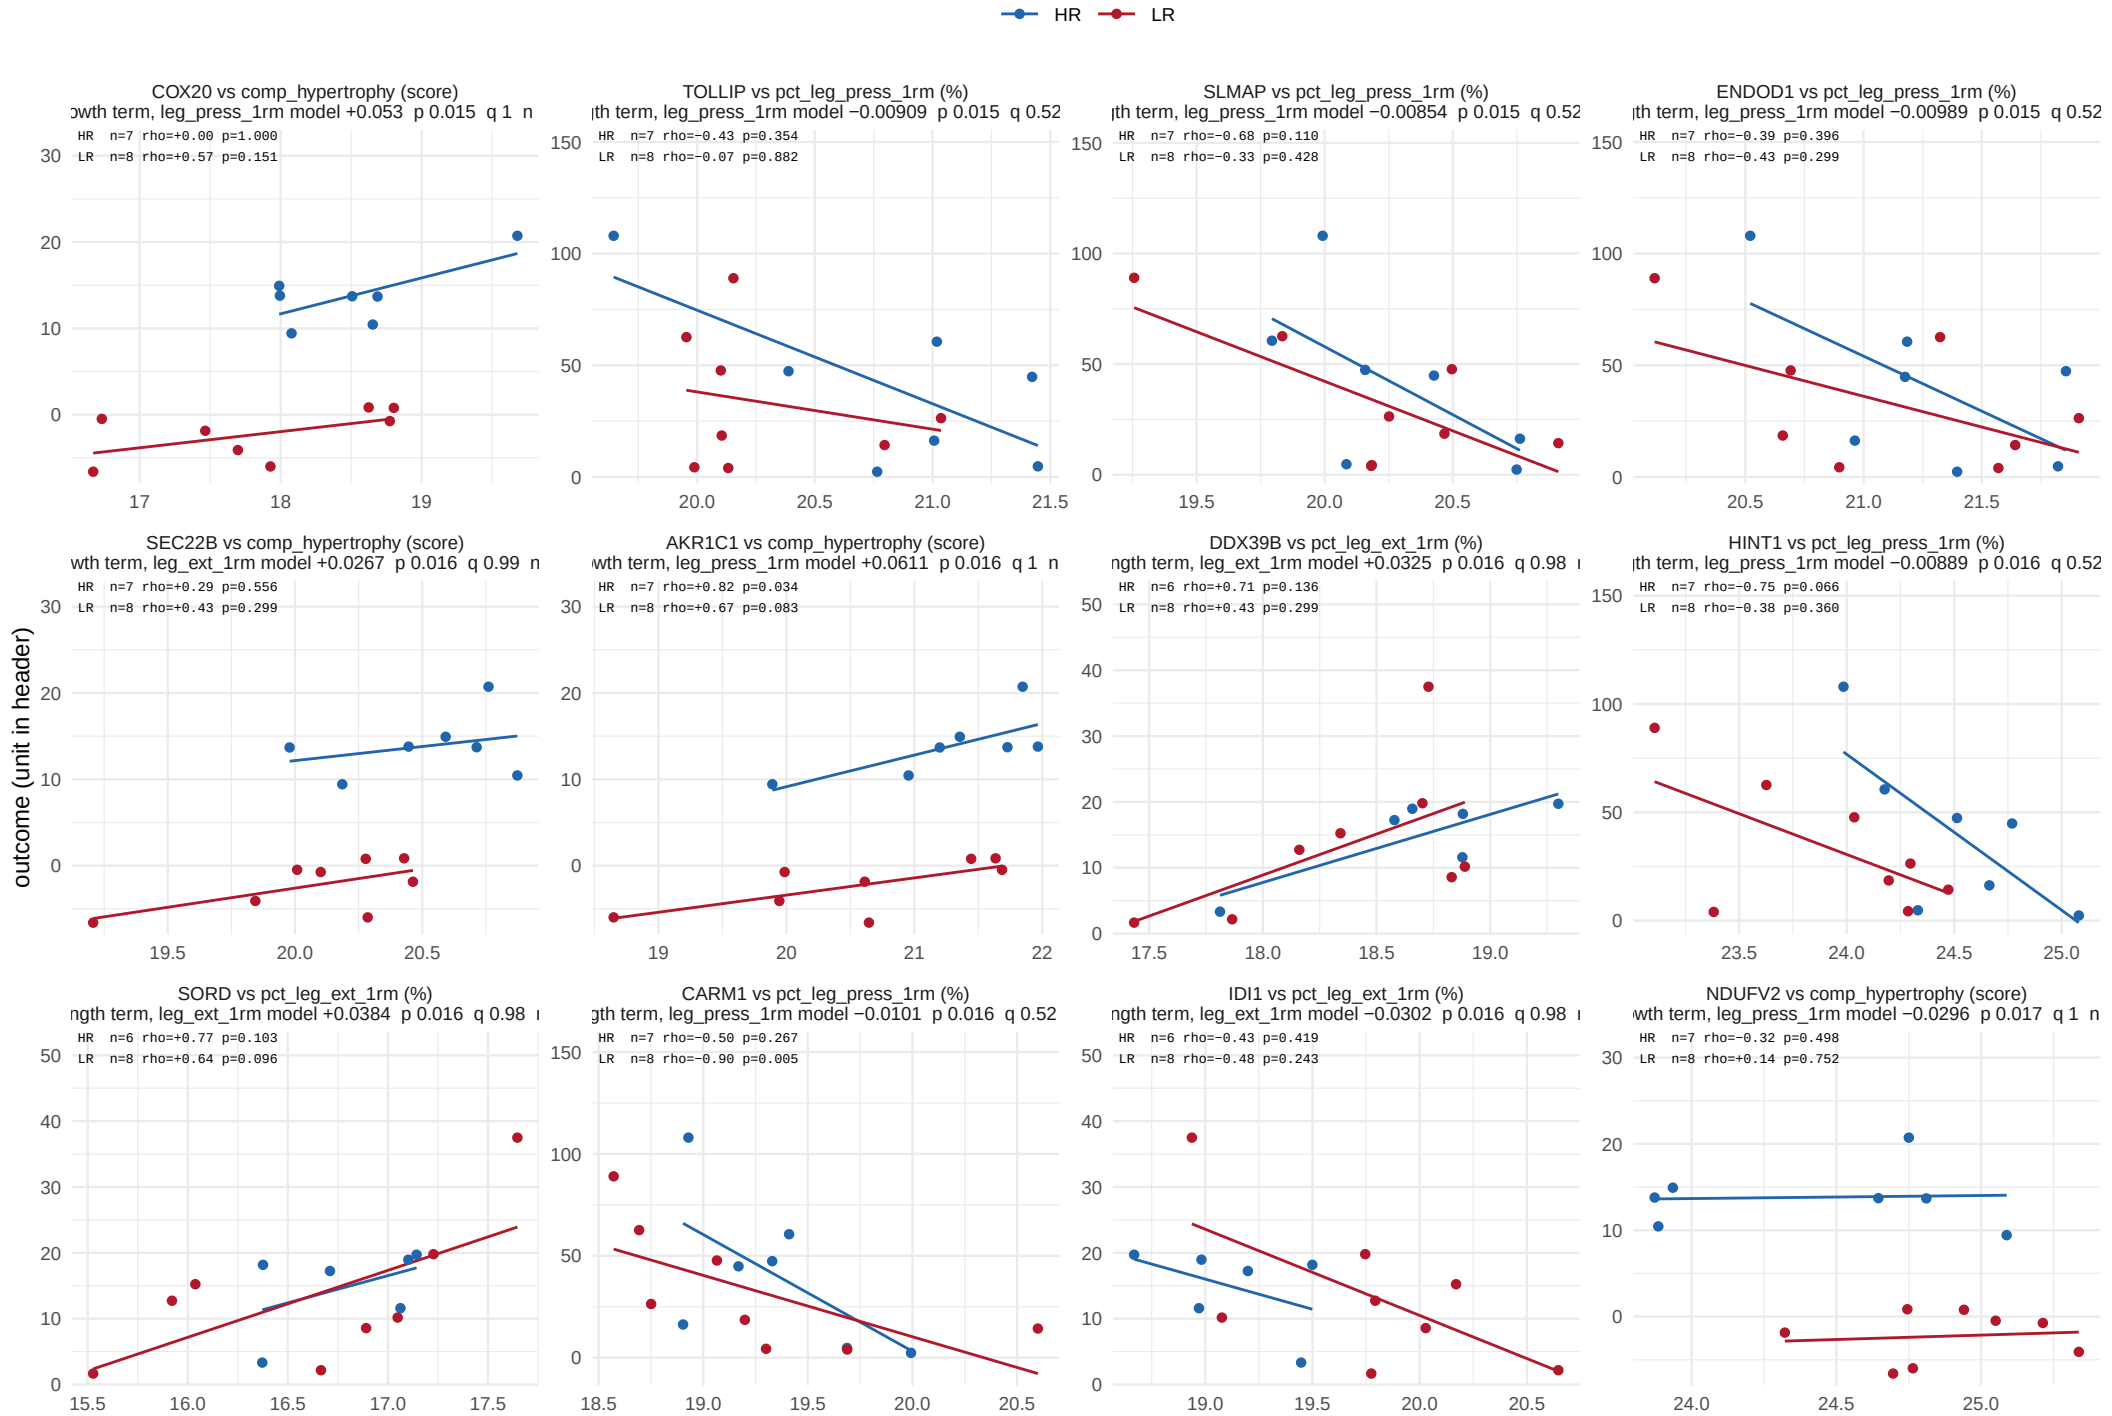

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, baseline window


387 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 11 of 33.

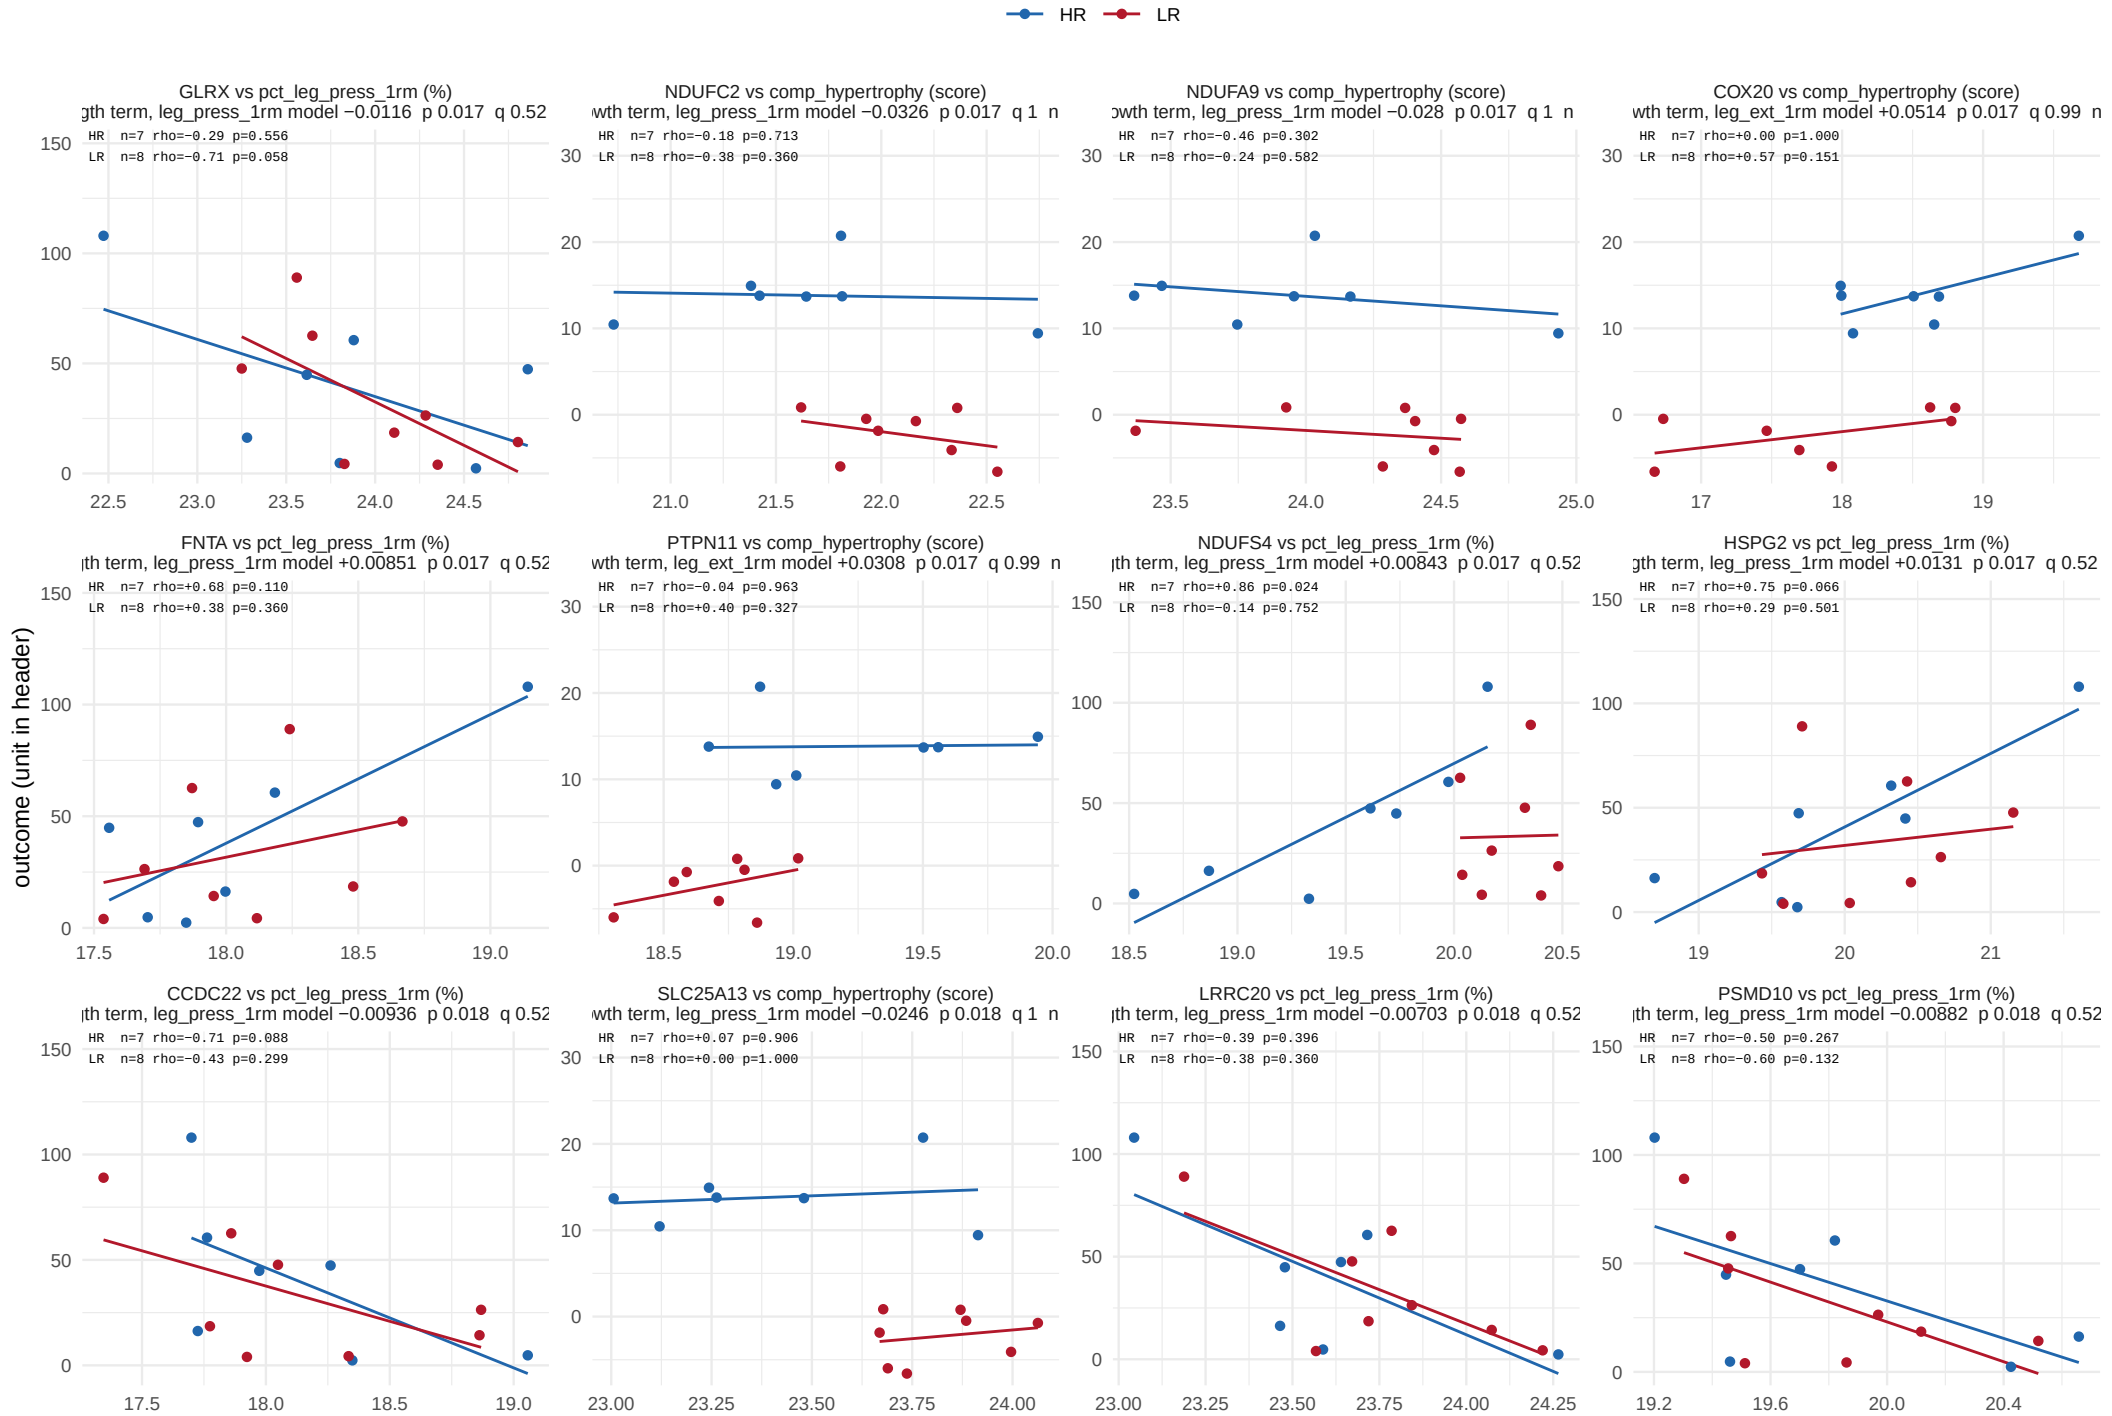

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, baseline window


387 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 12 of 33.

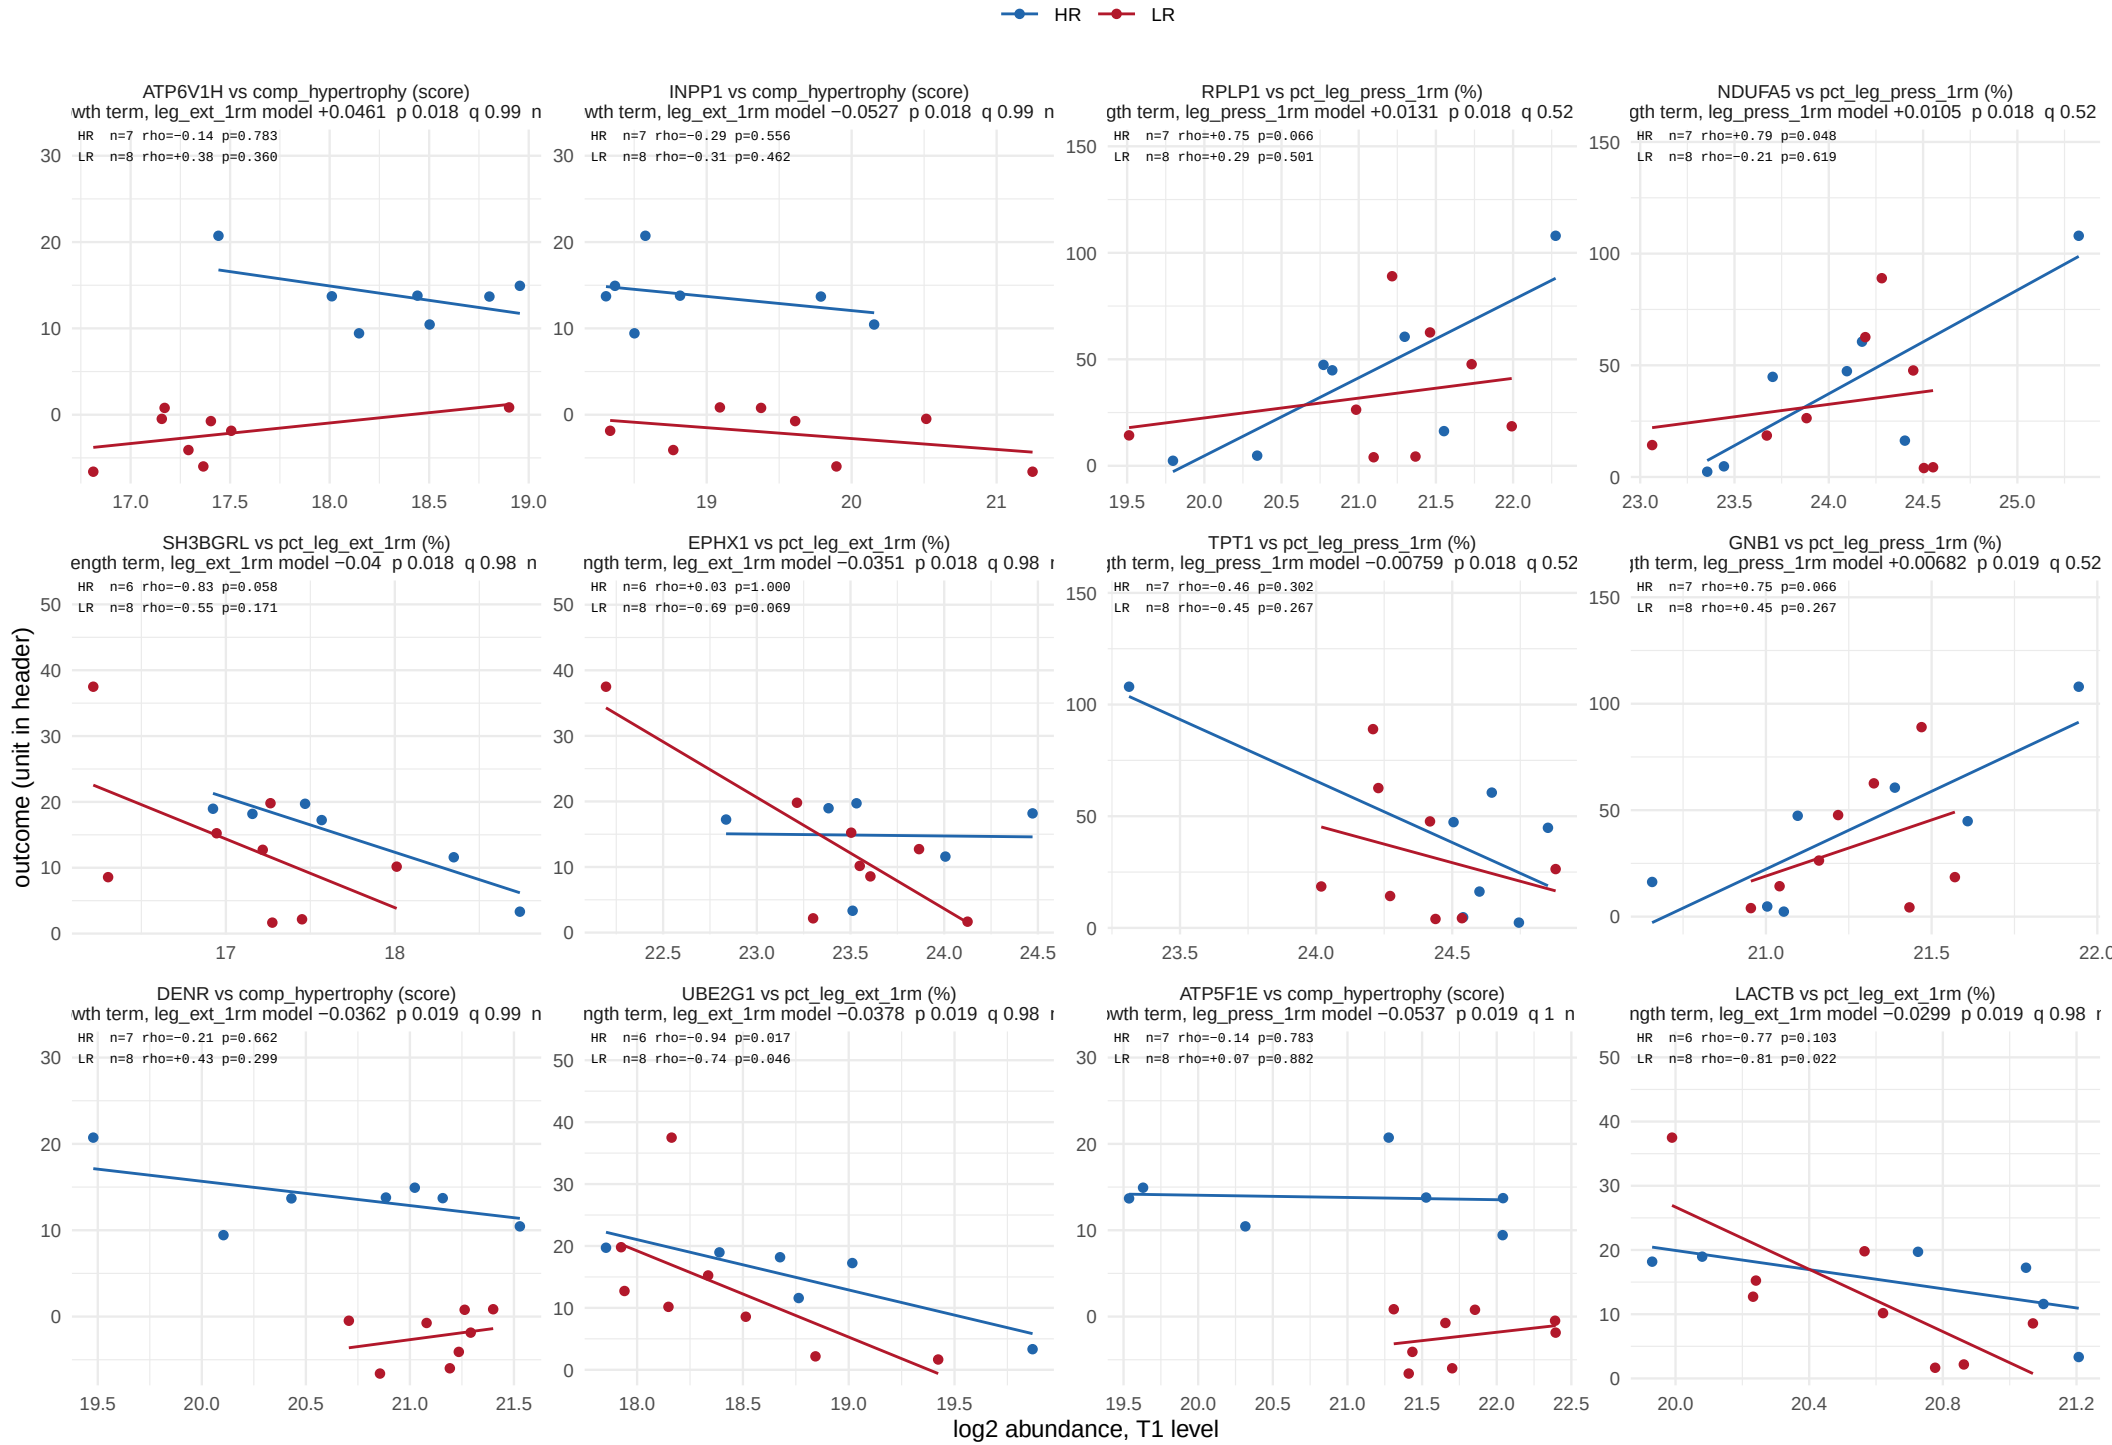

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, baseline window


387 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 13 of 33.

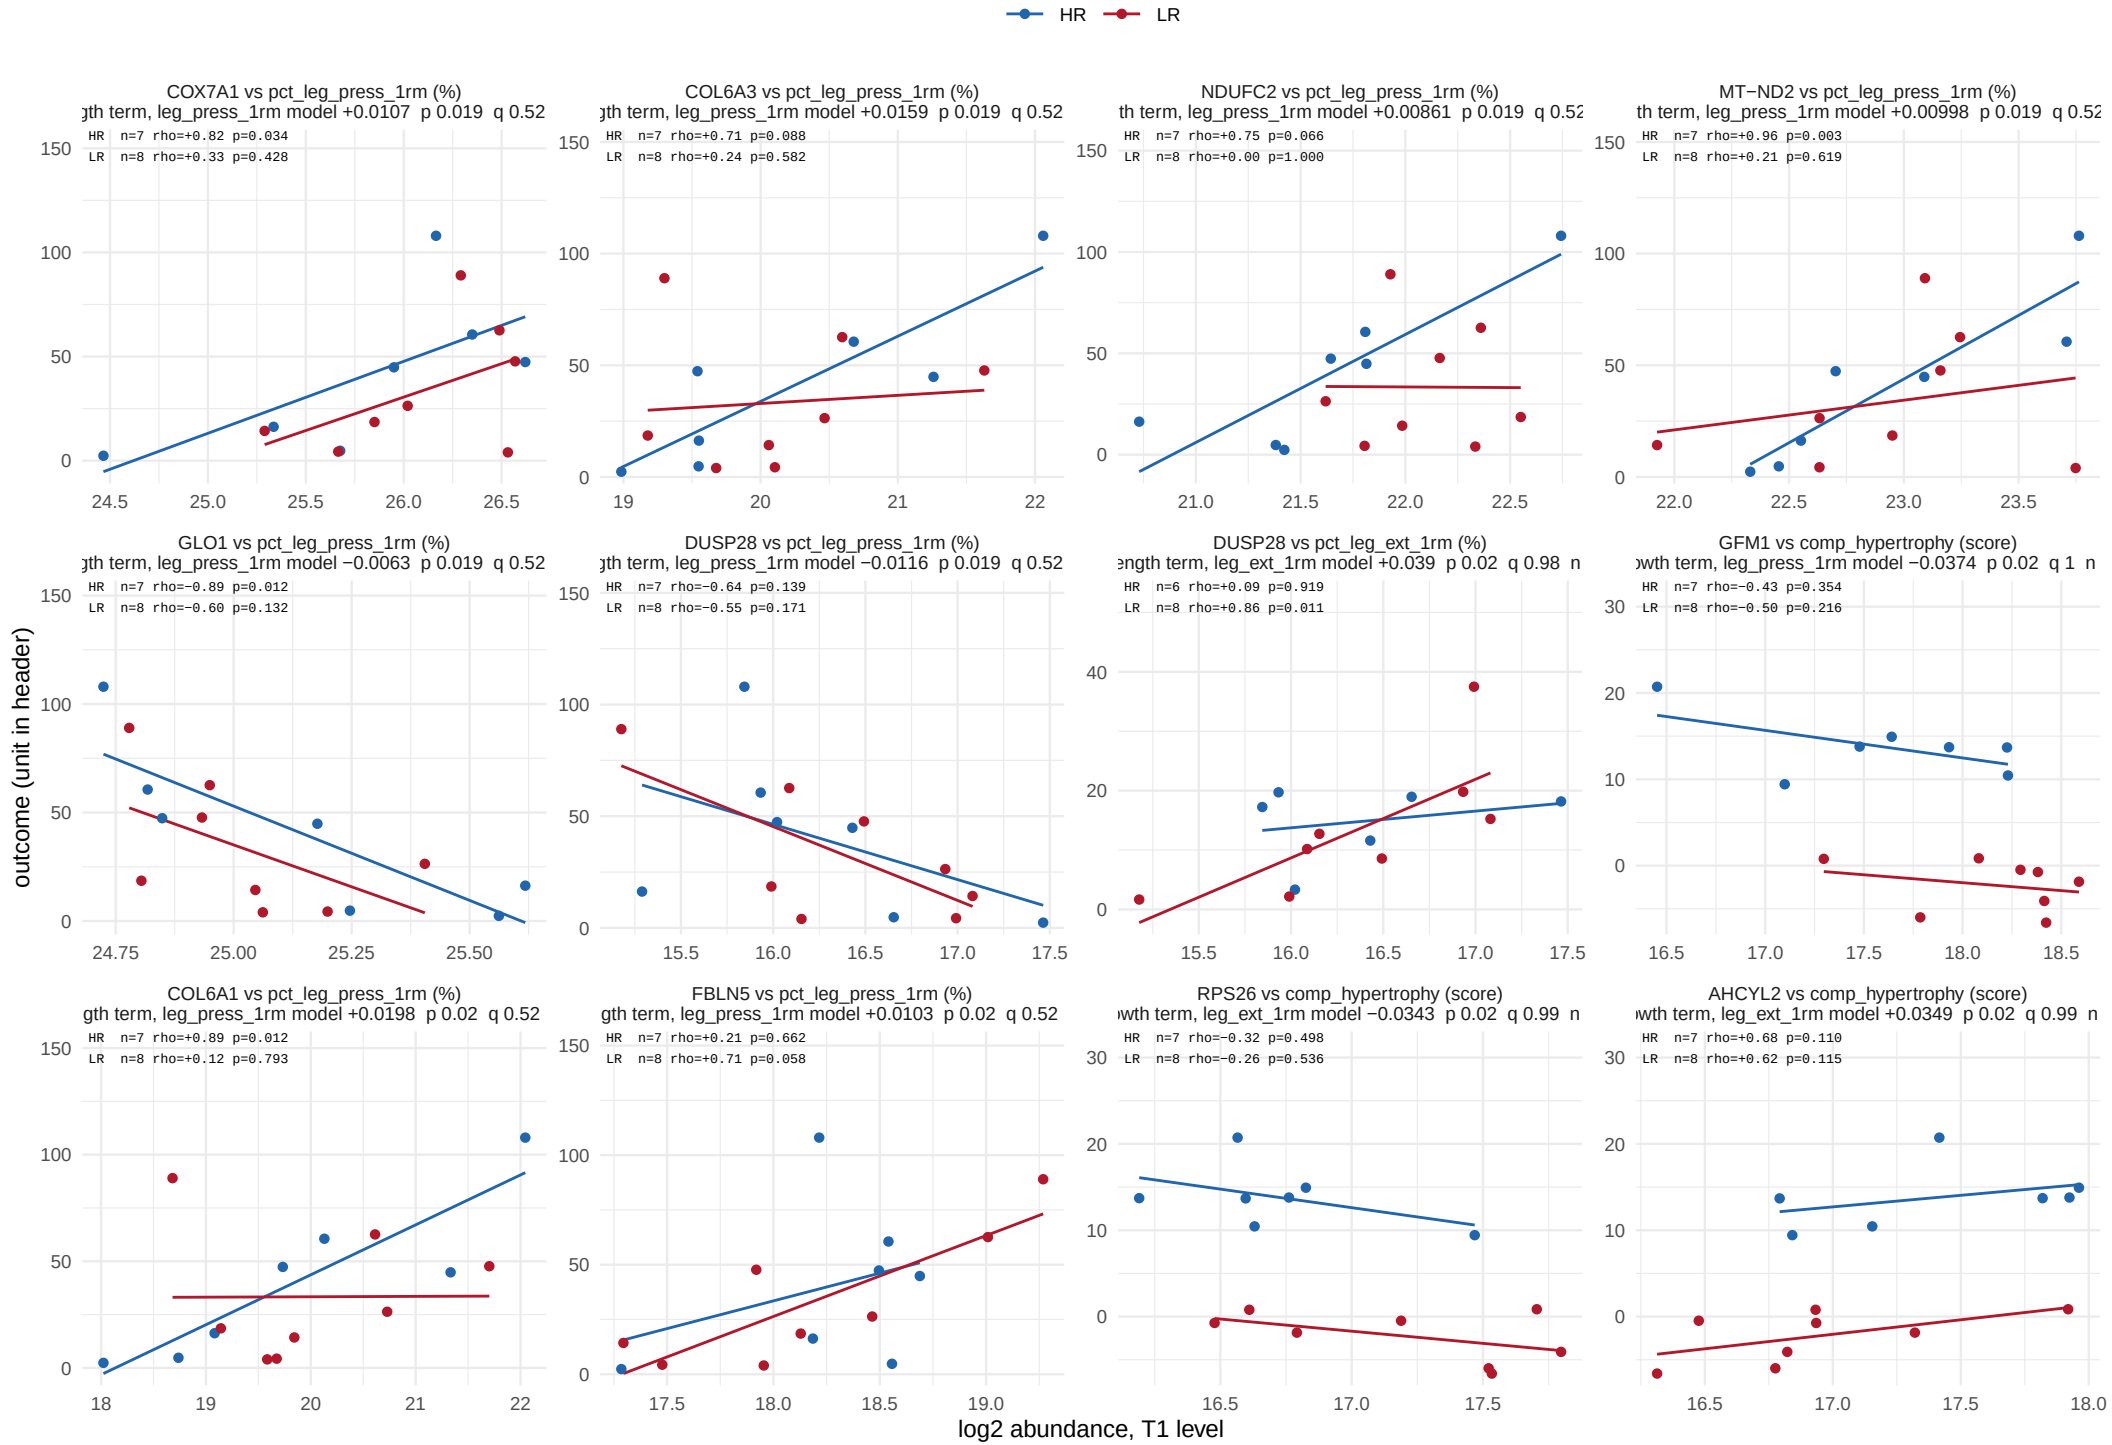

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, baseline window


387 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 14 of 33.

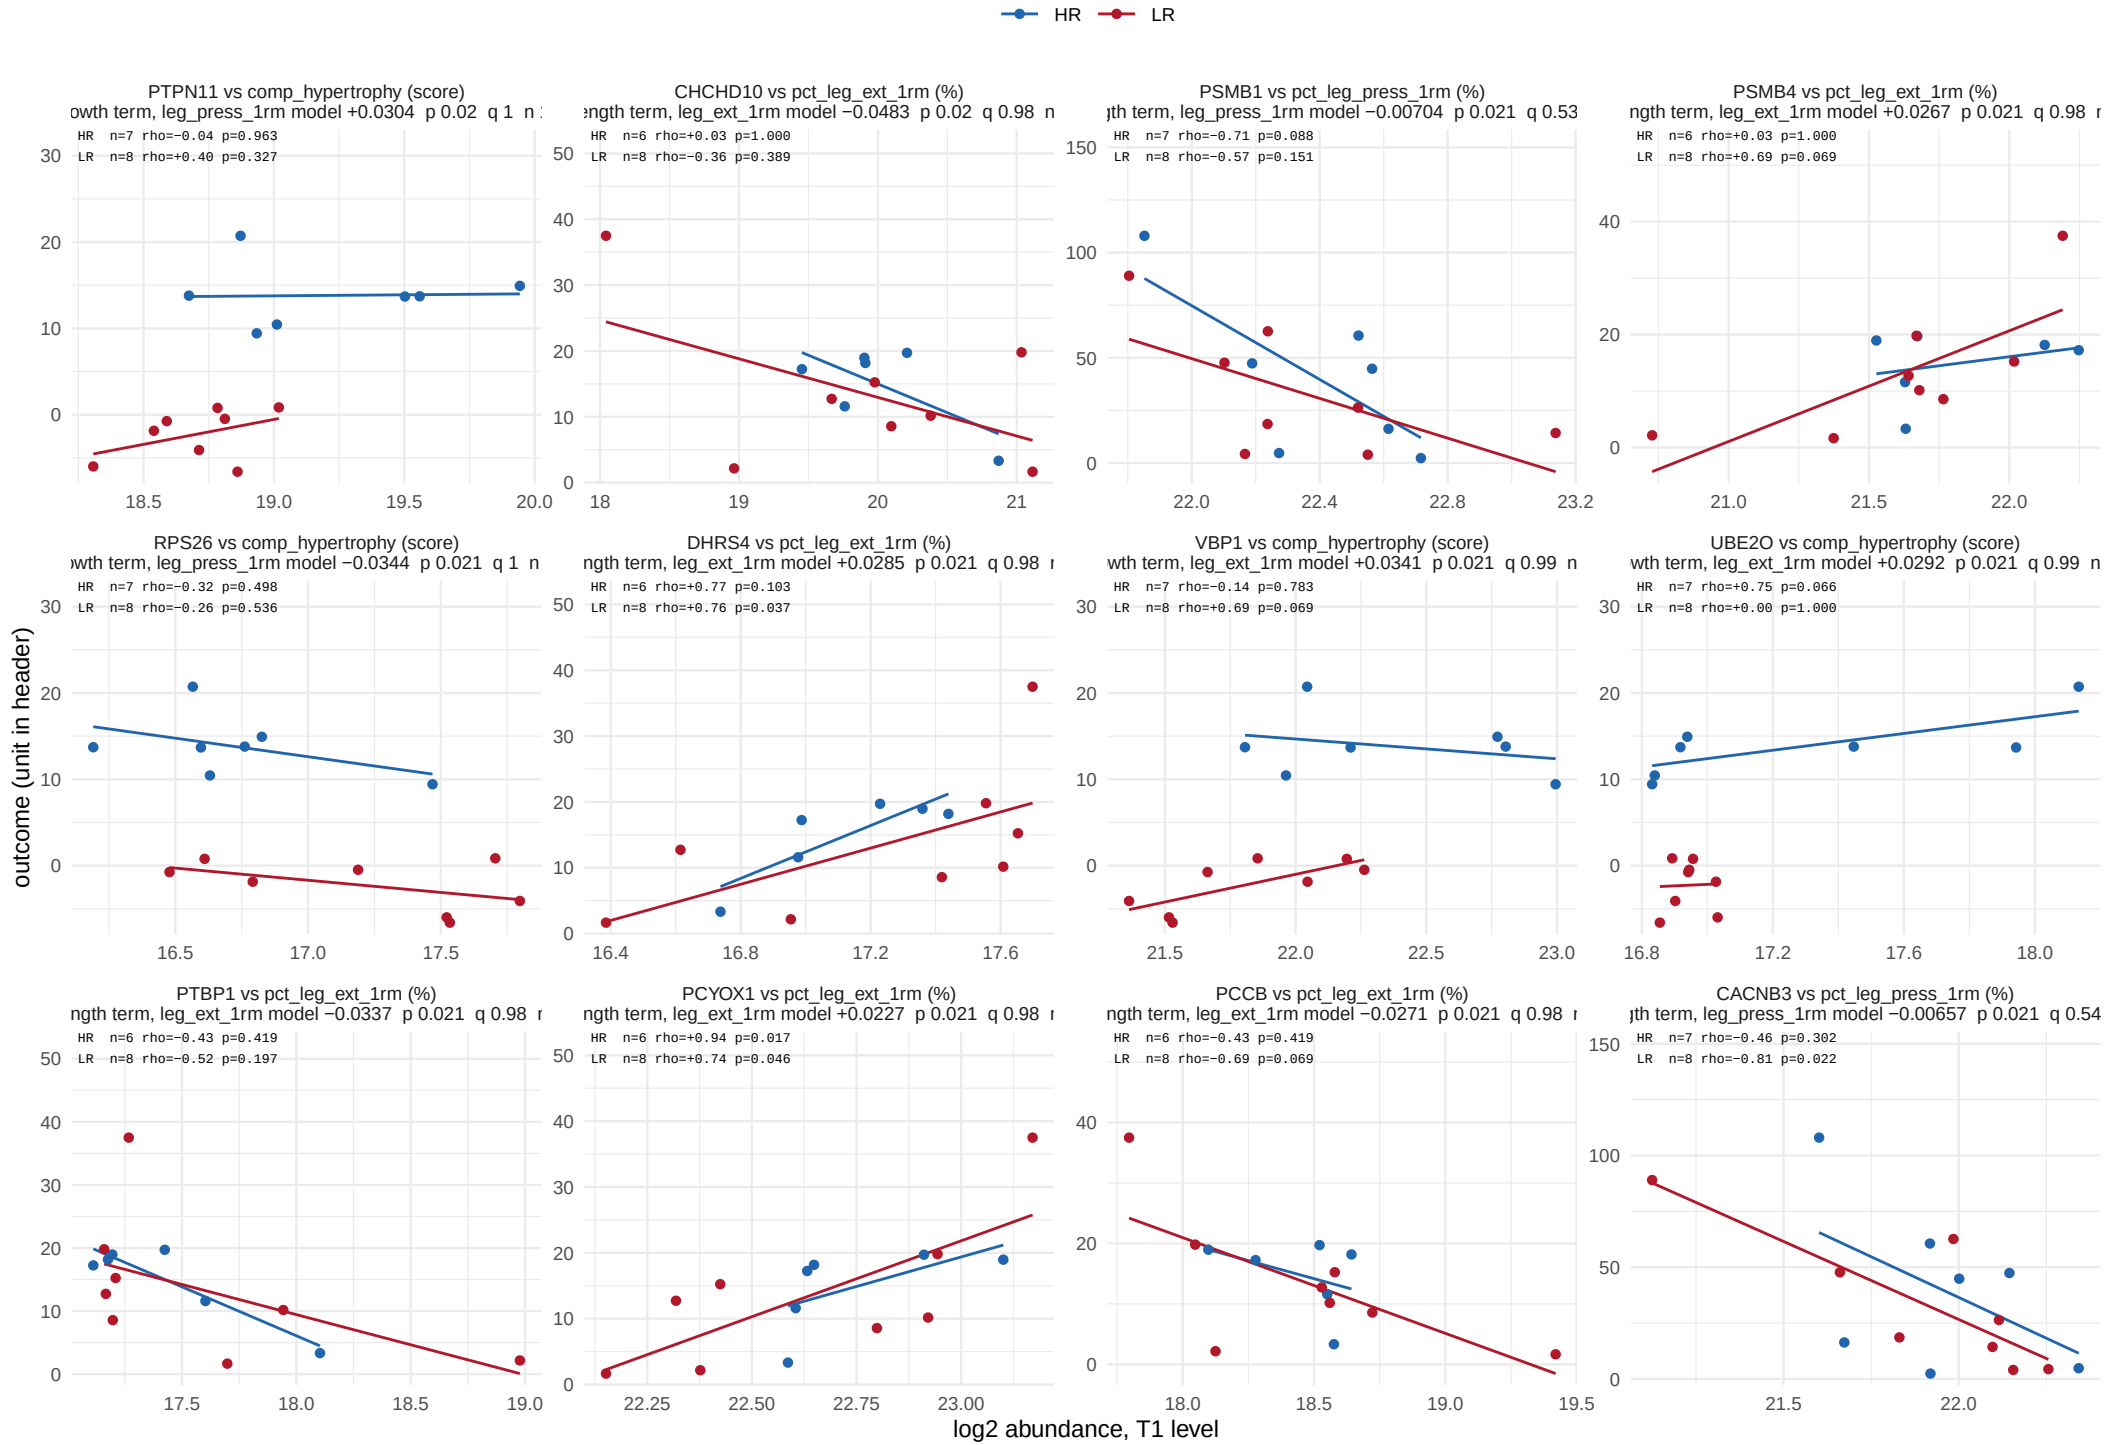

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, baseline window


387 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 15 of 33.

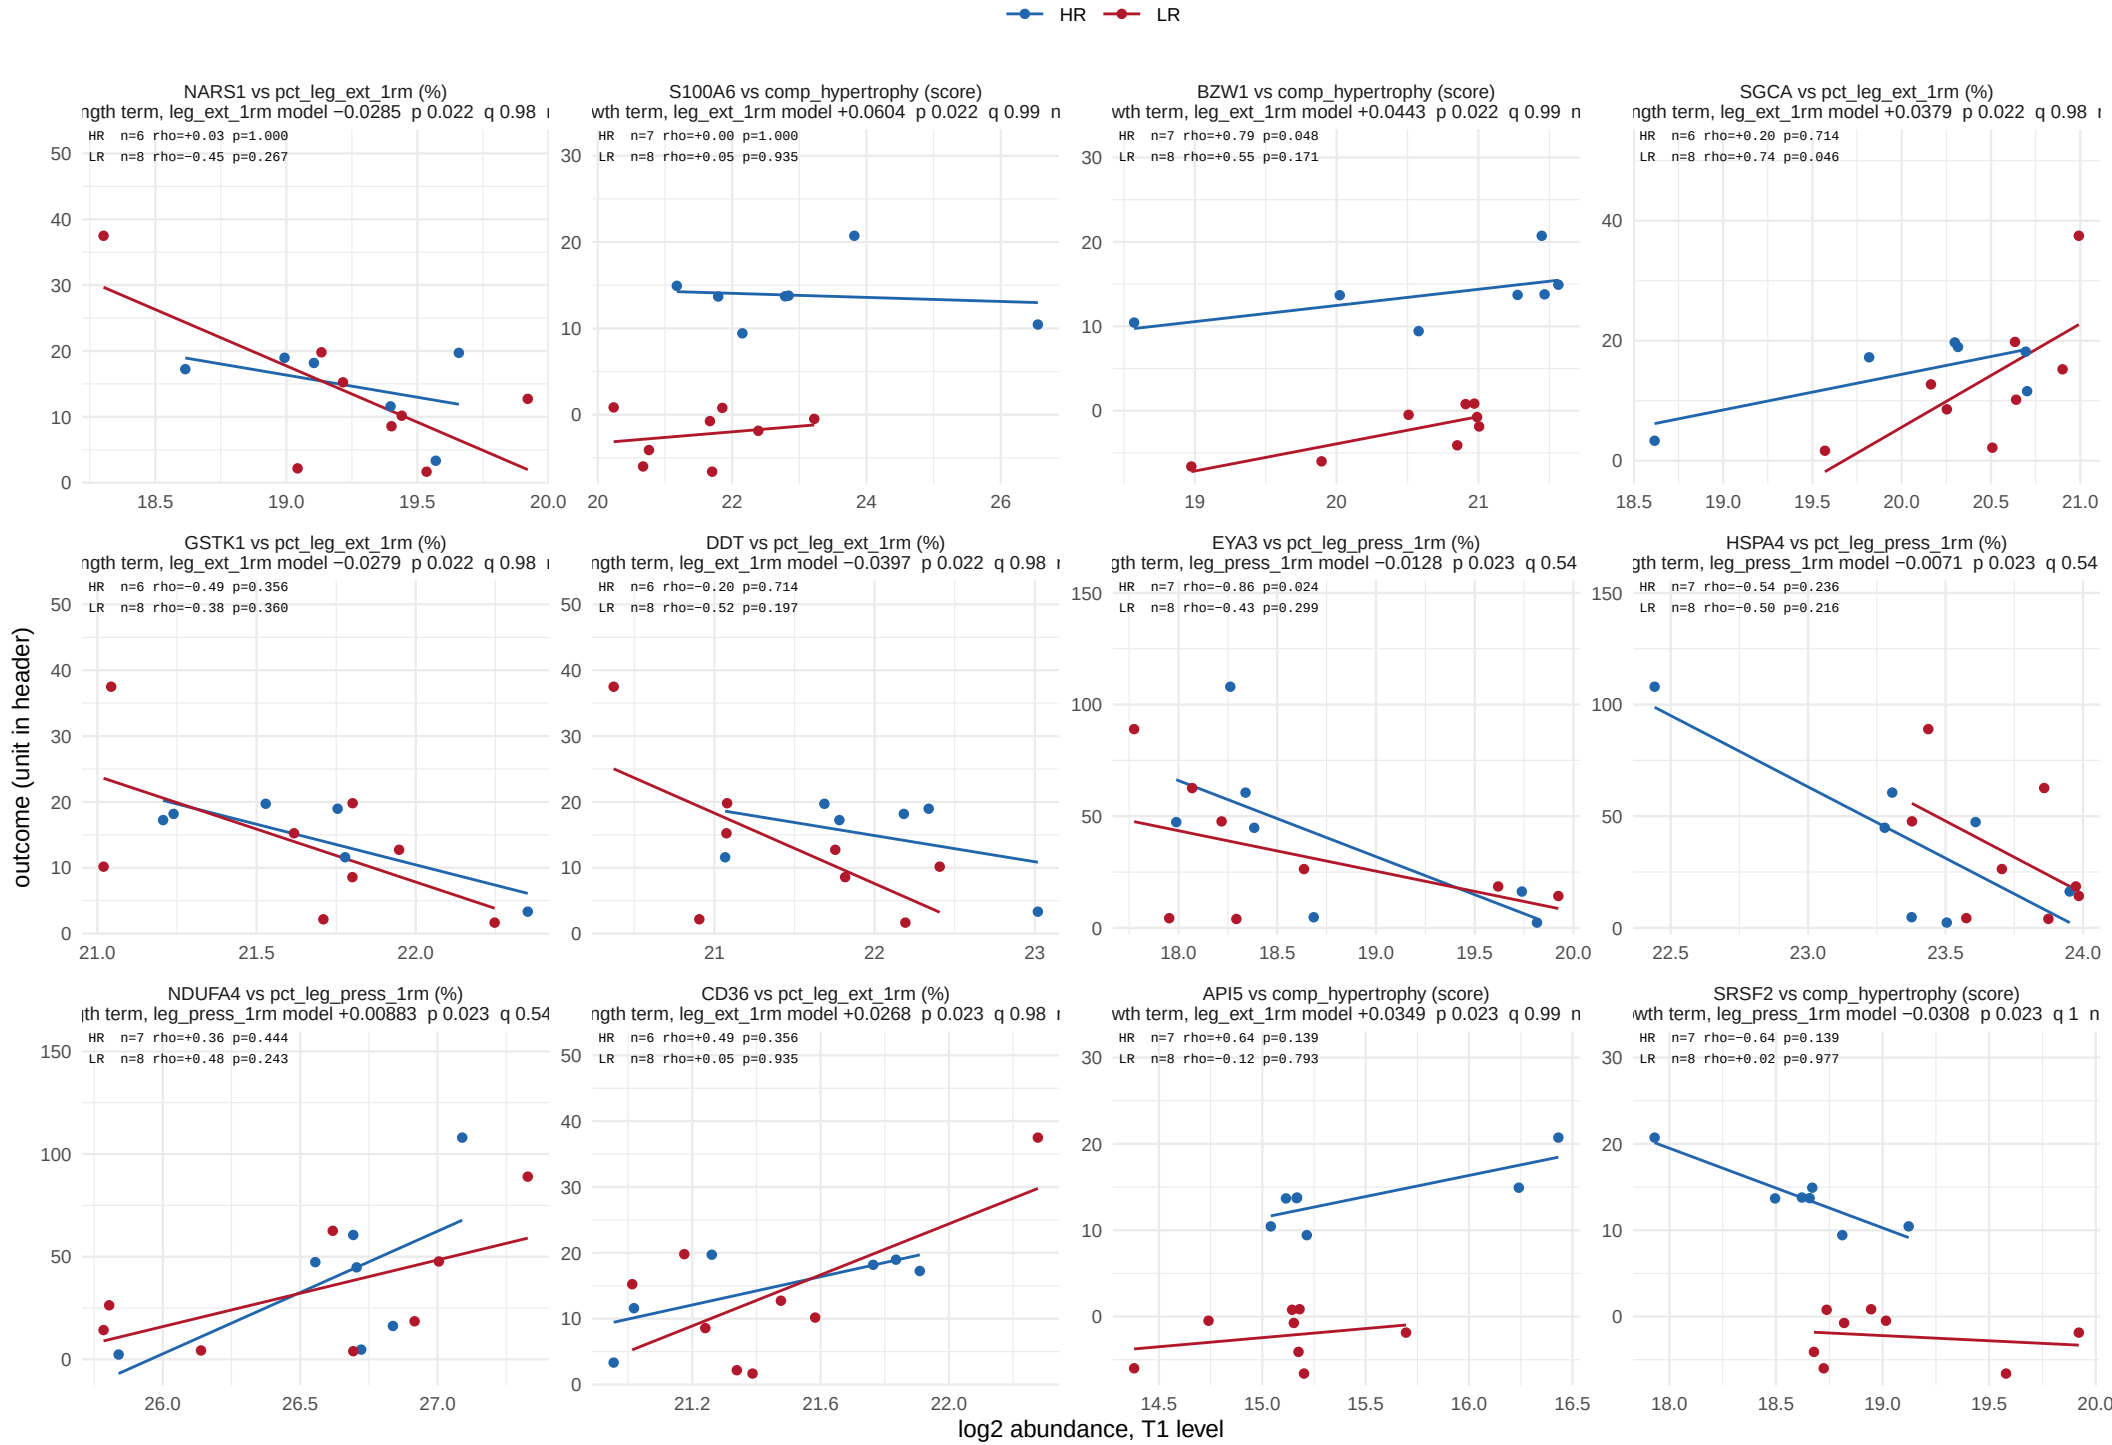

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, baseline window


387 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 16 of 33.

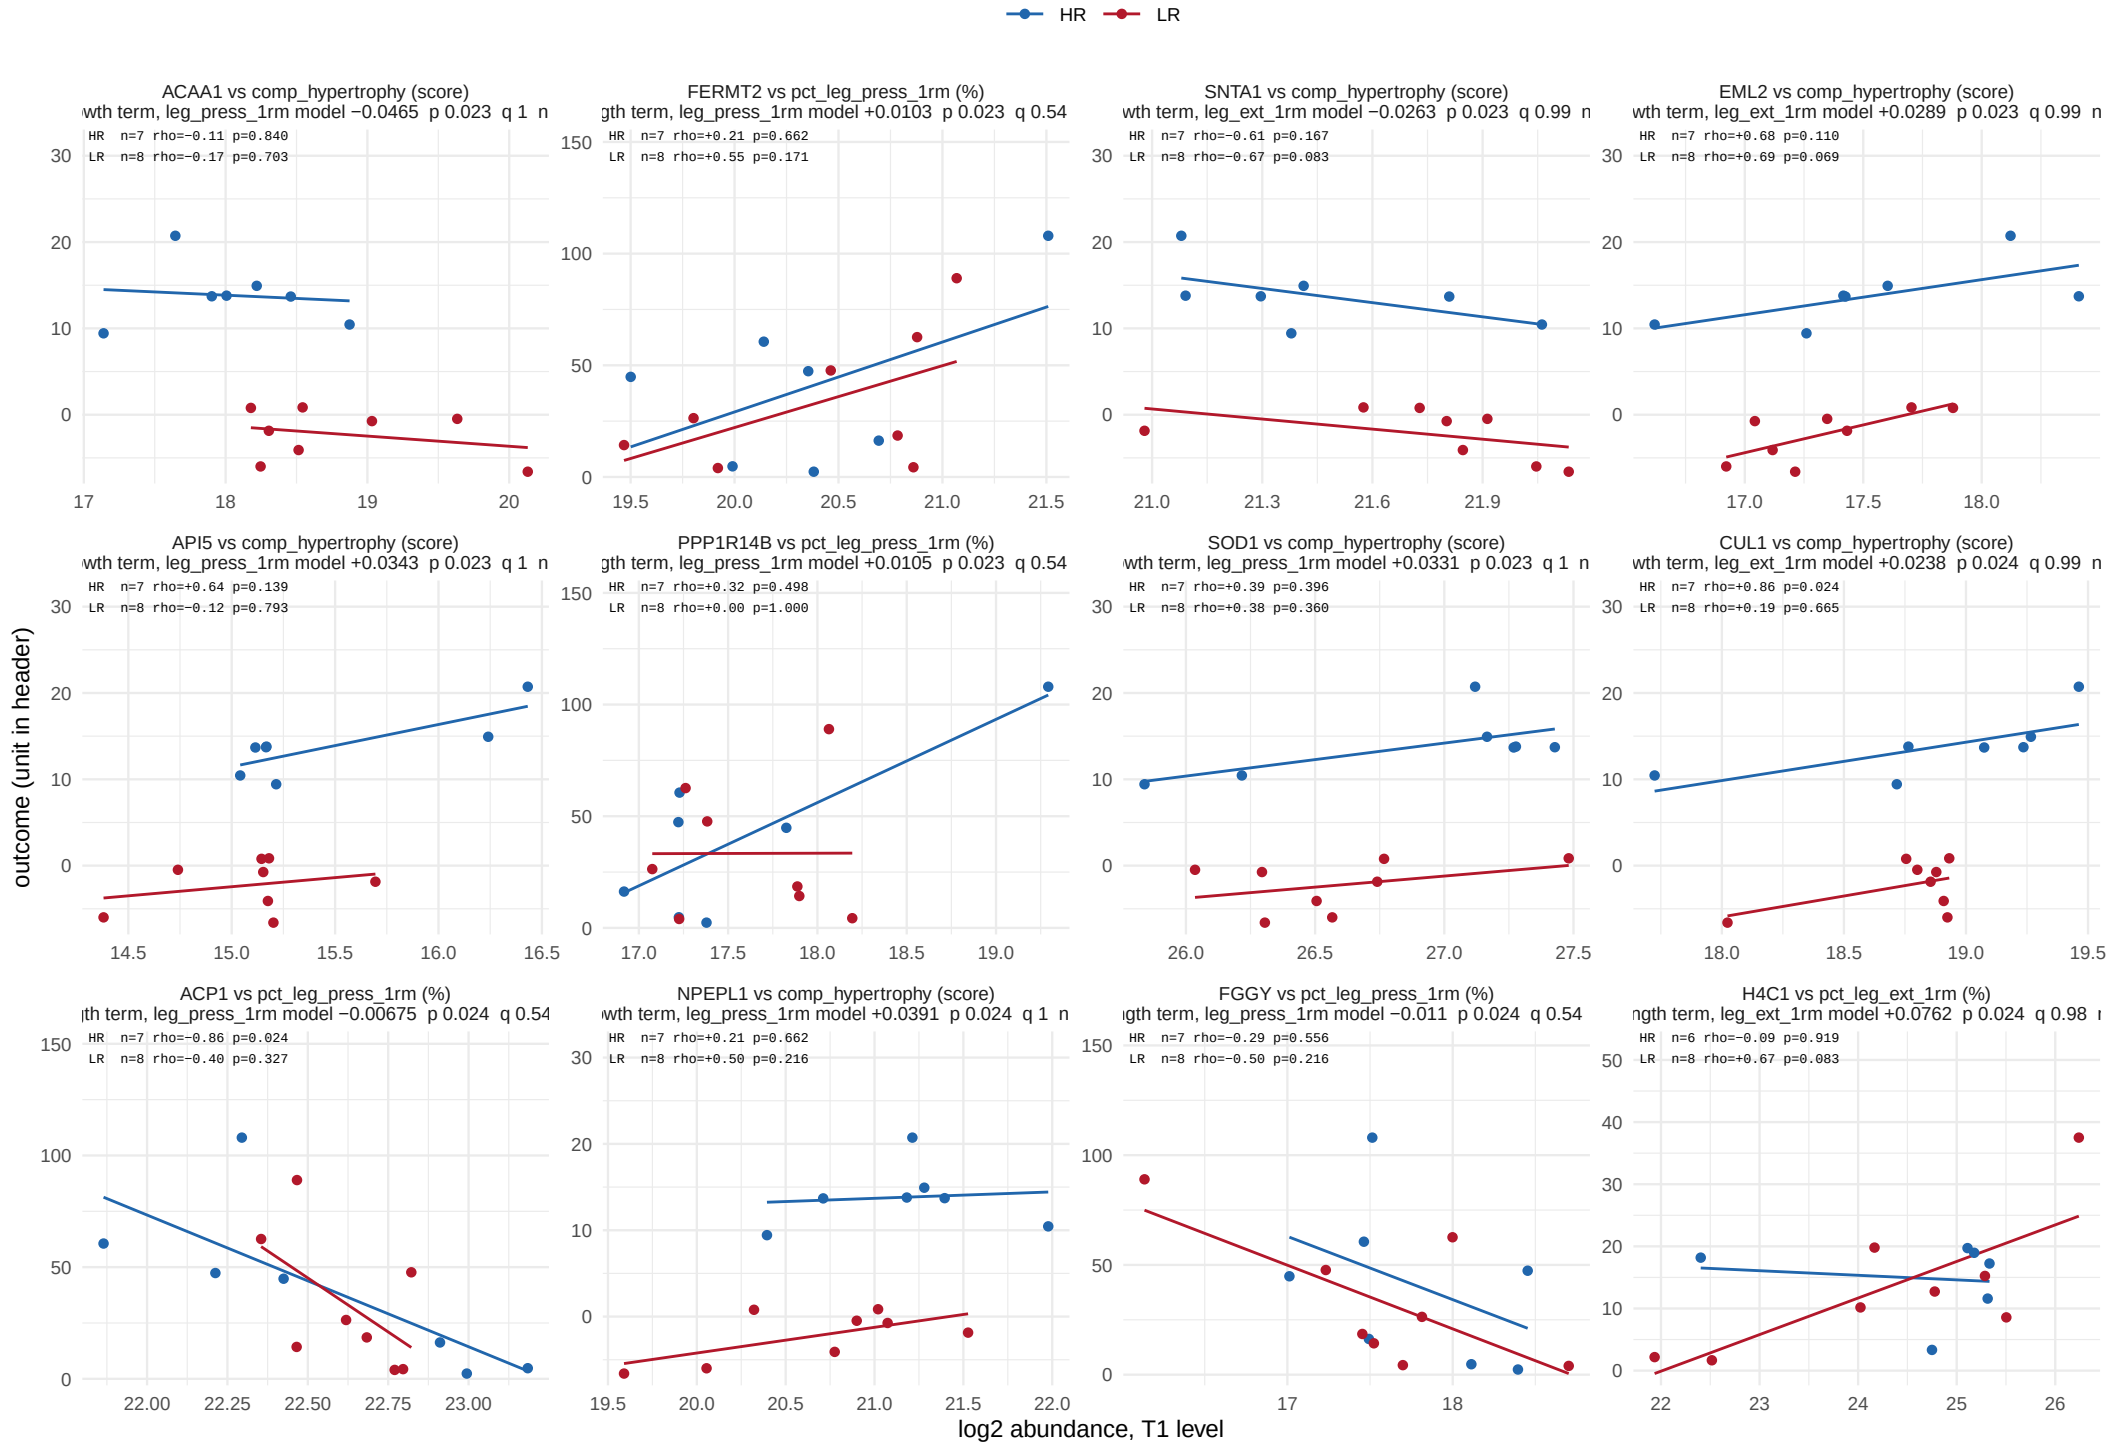

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, baseline window


387 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 17 of 33.

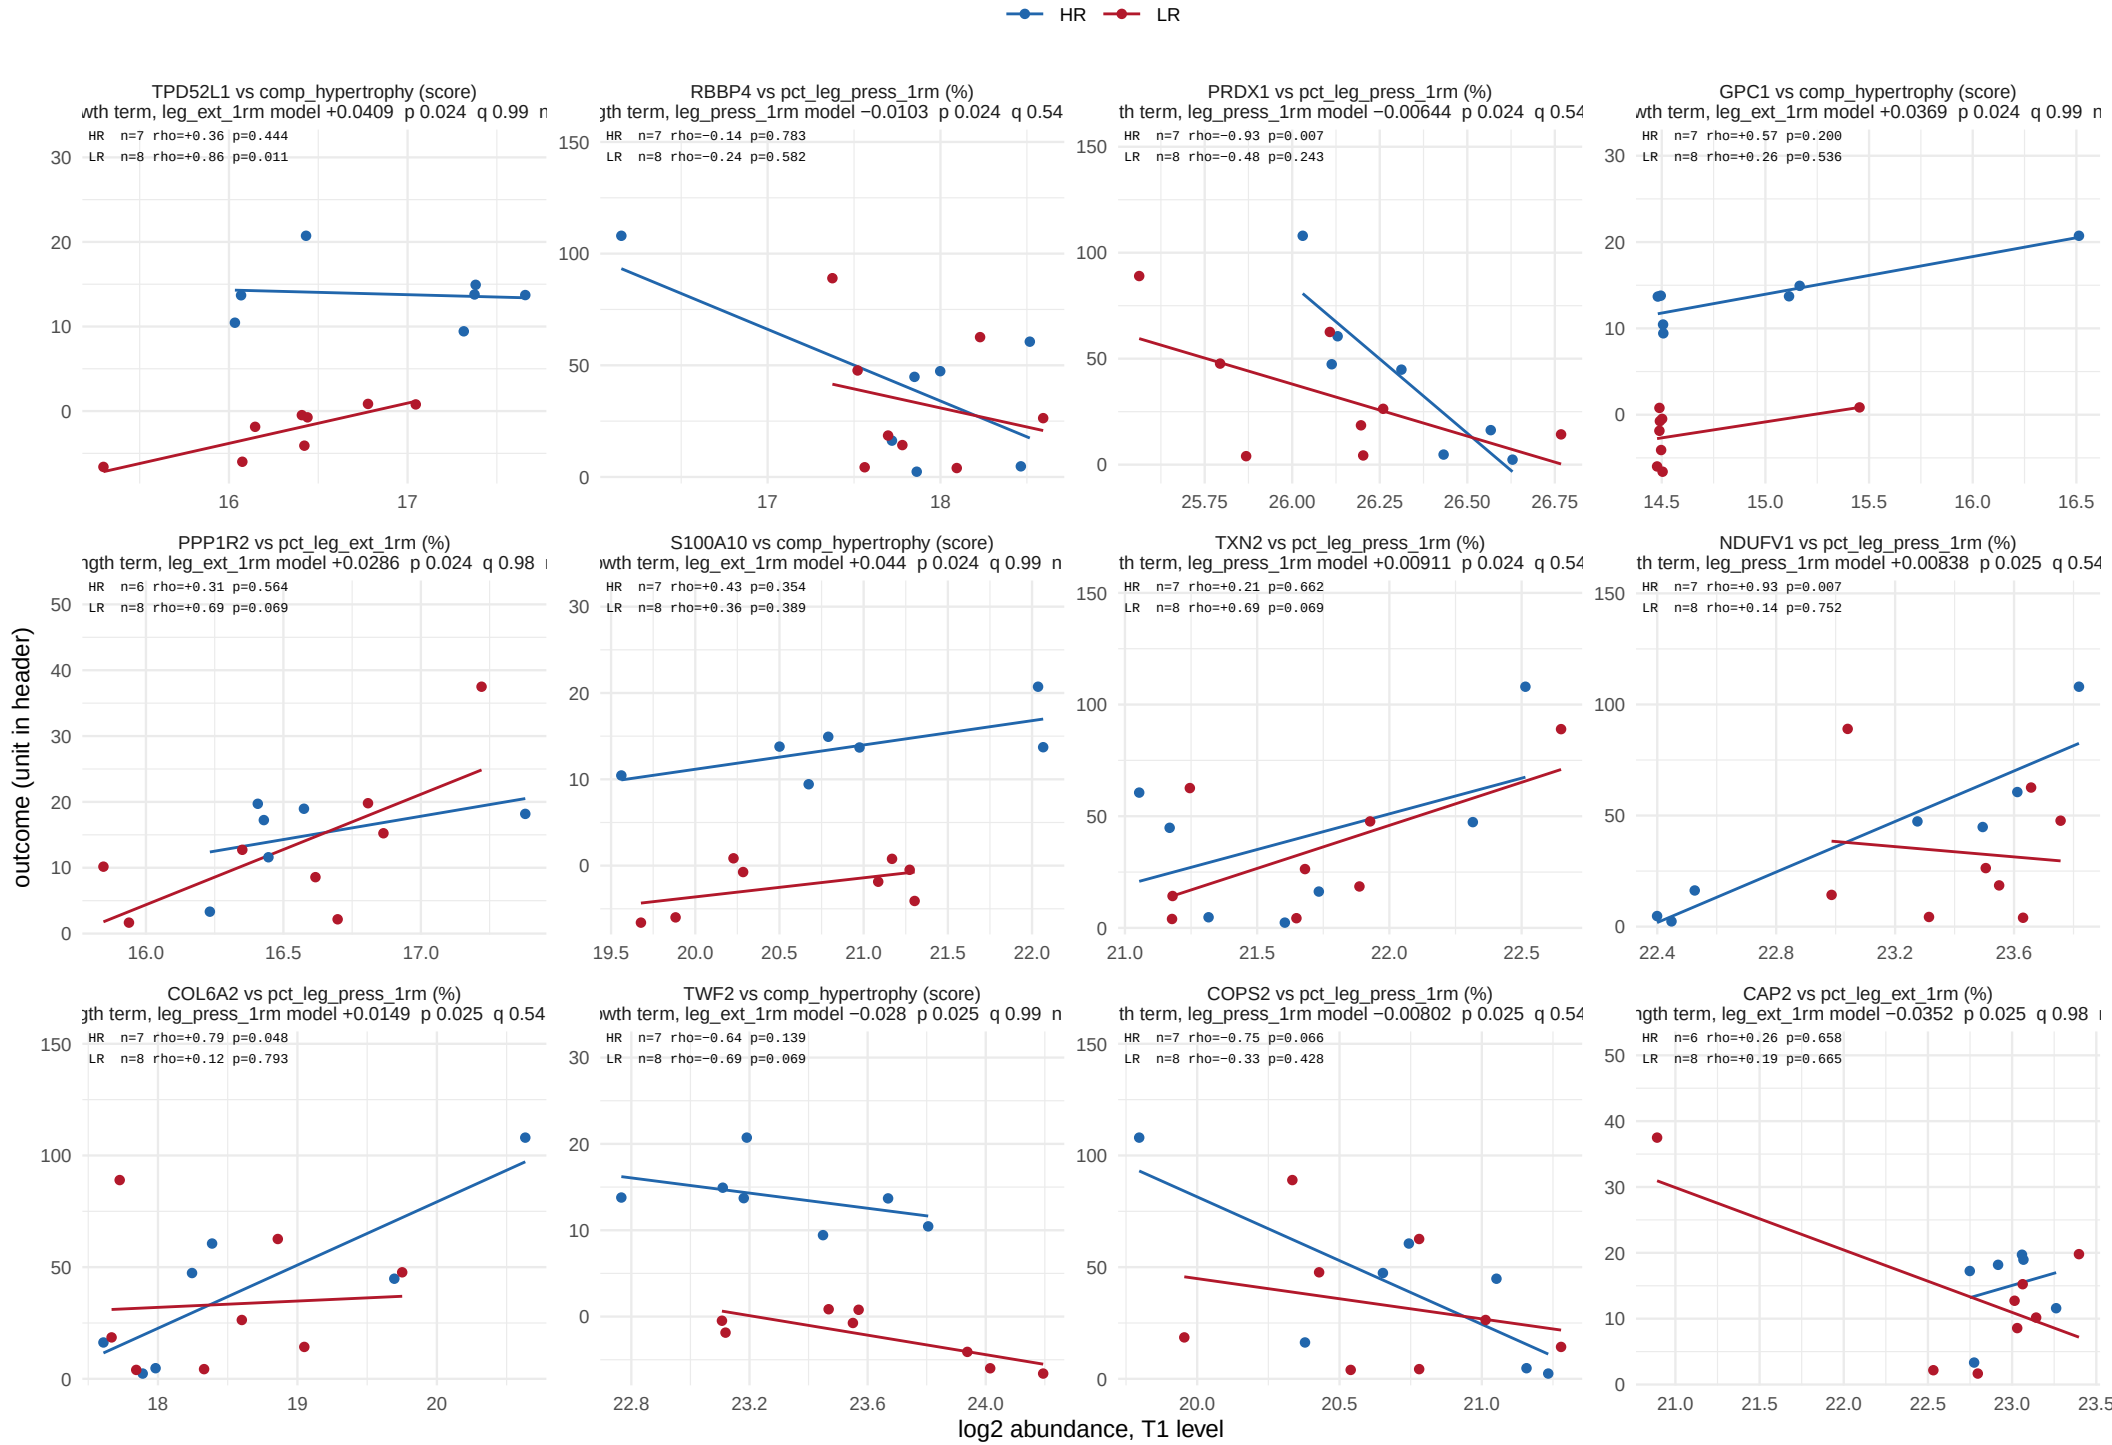

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, baseline window


387 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 18 of 33.

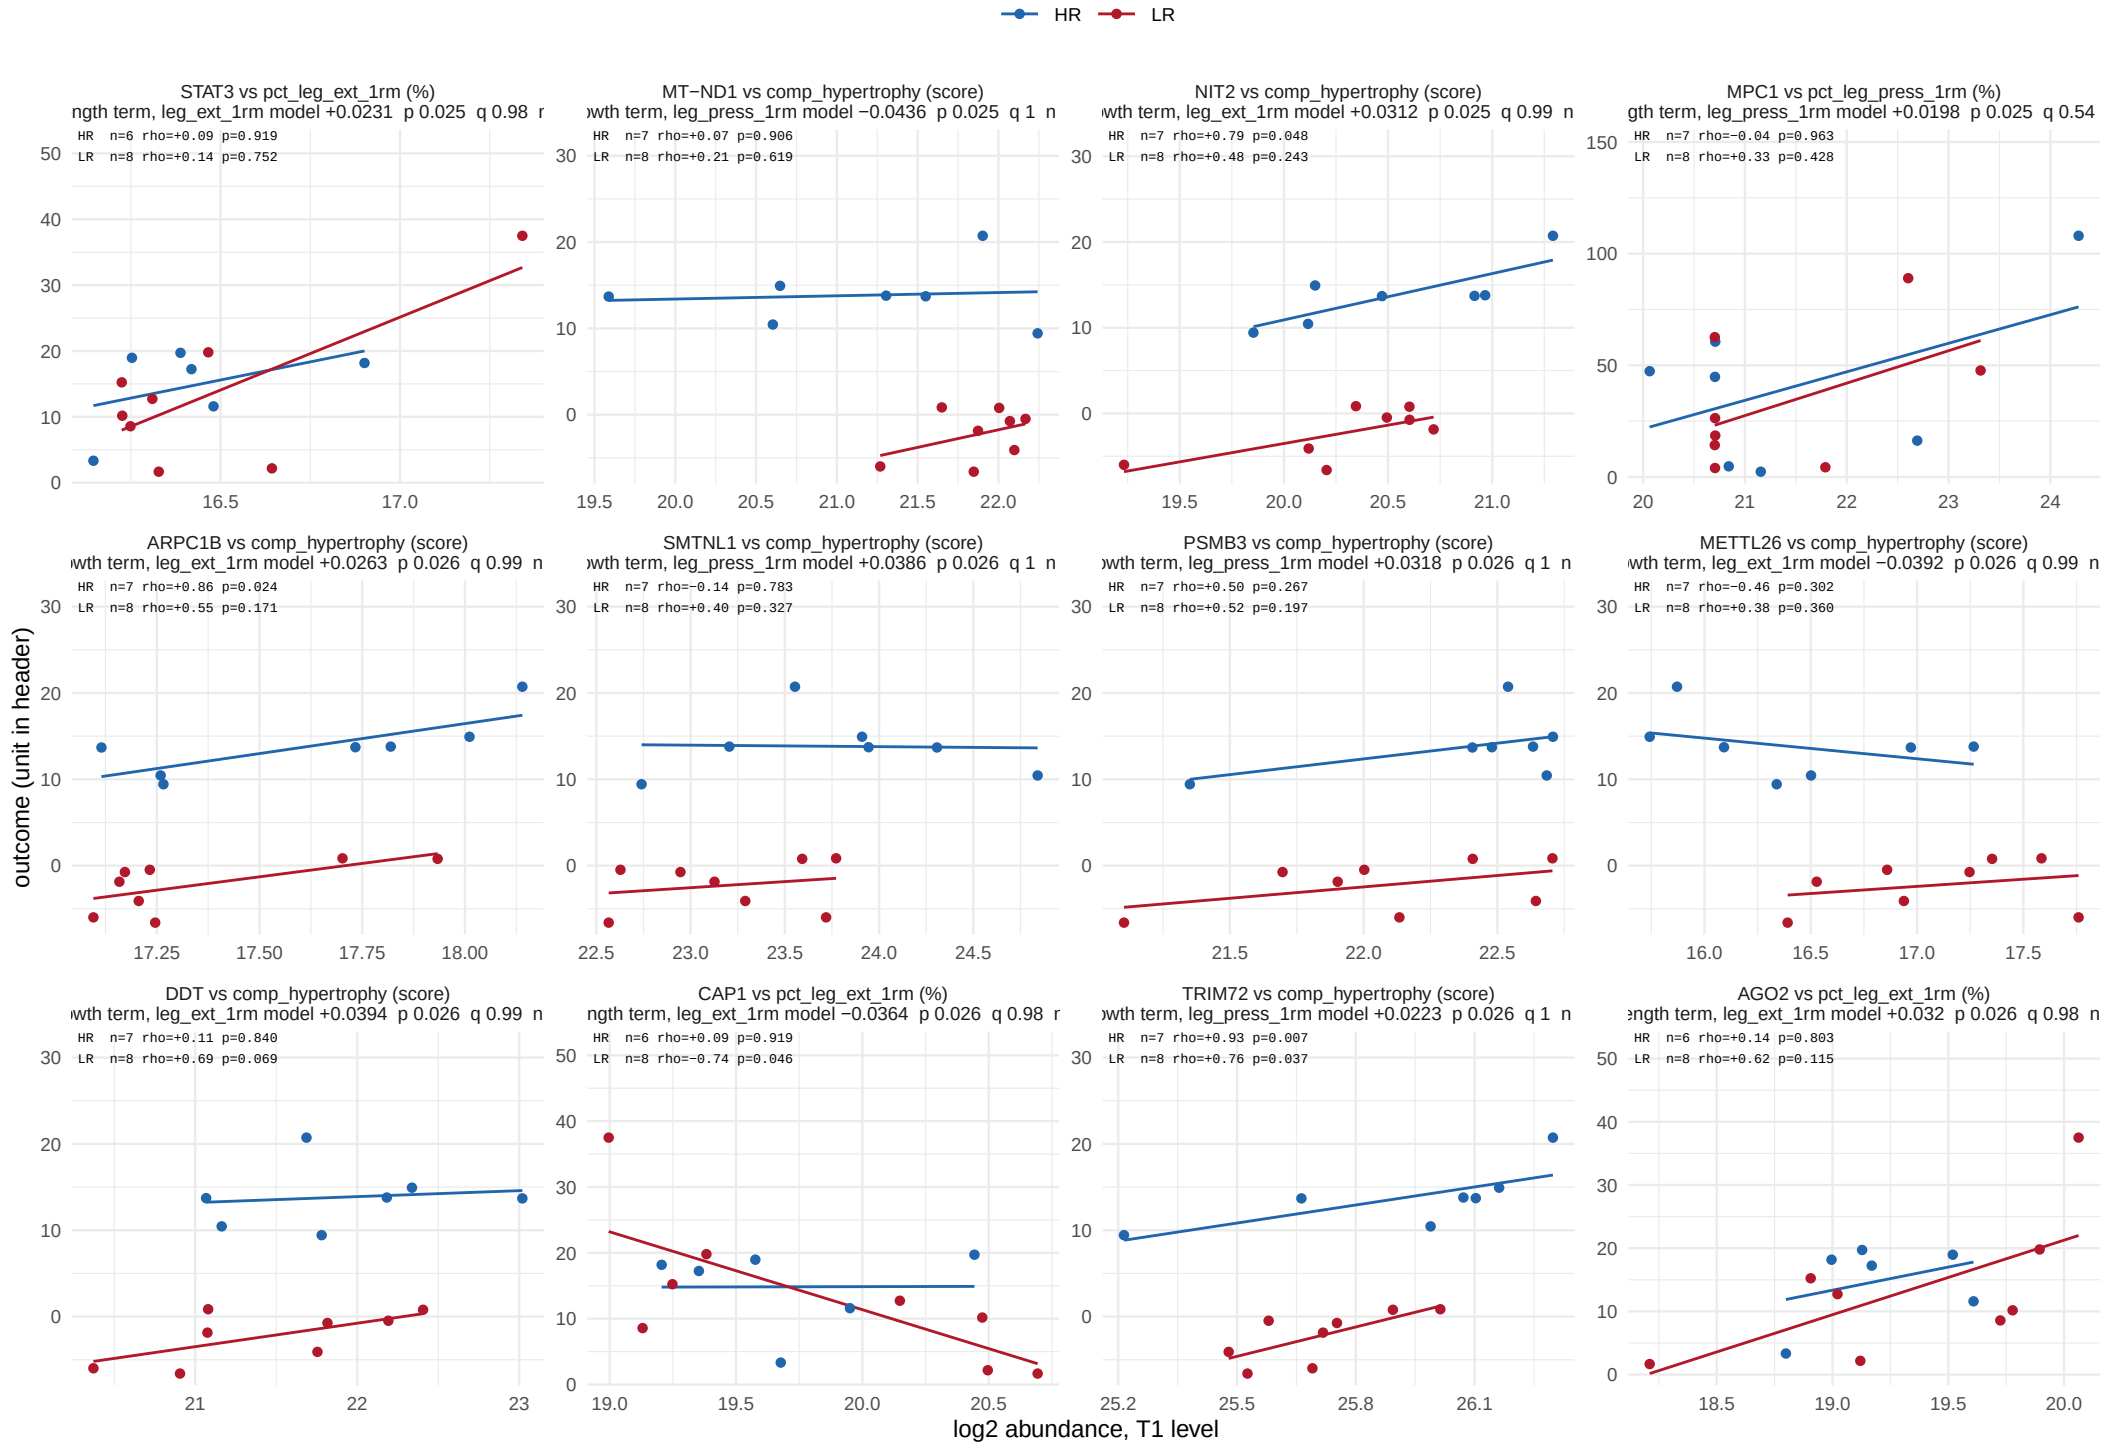

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, baseline window


387 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 19 of 33.

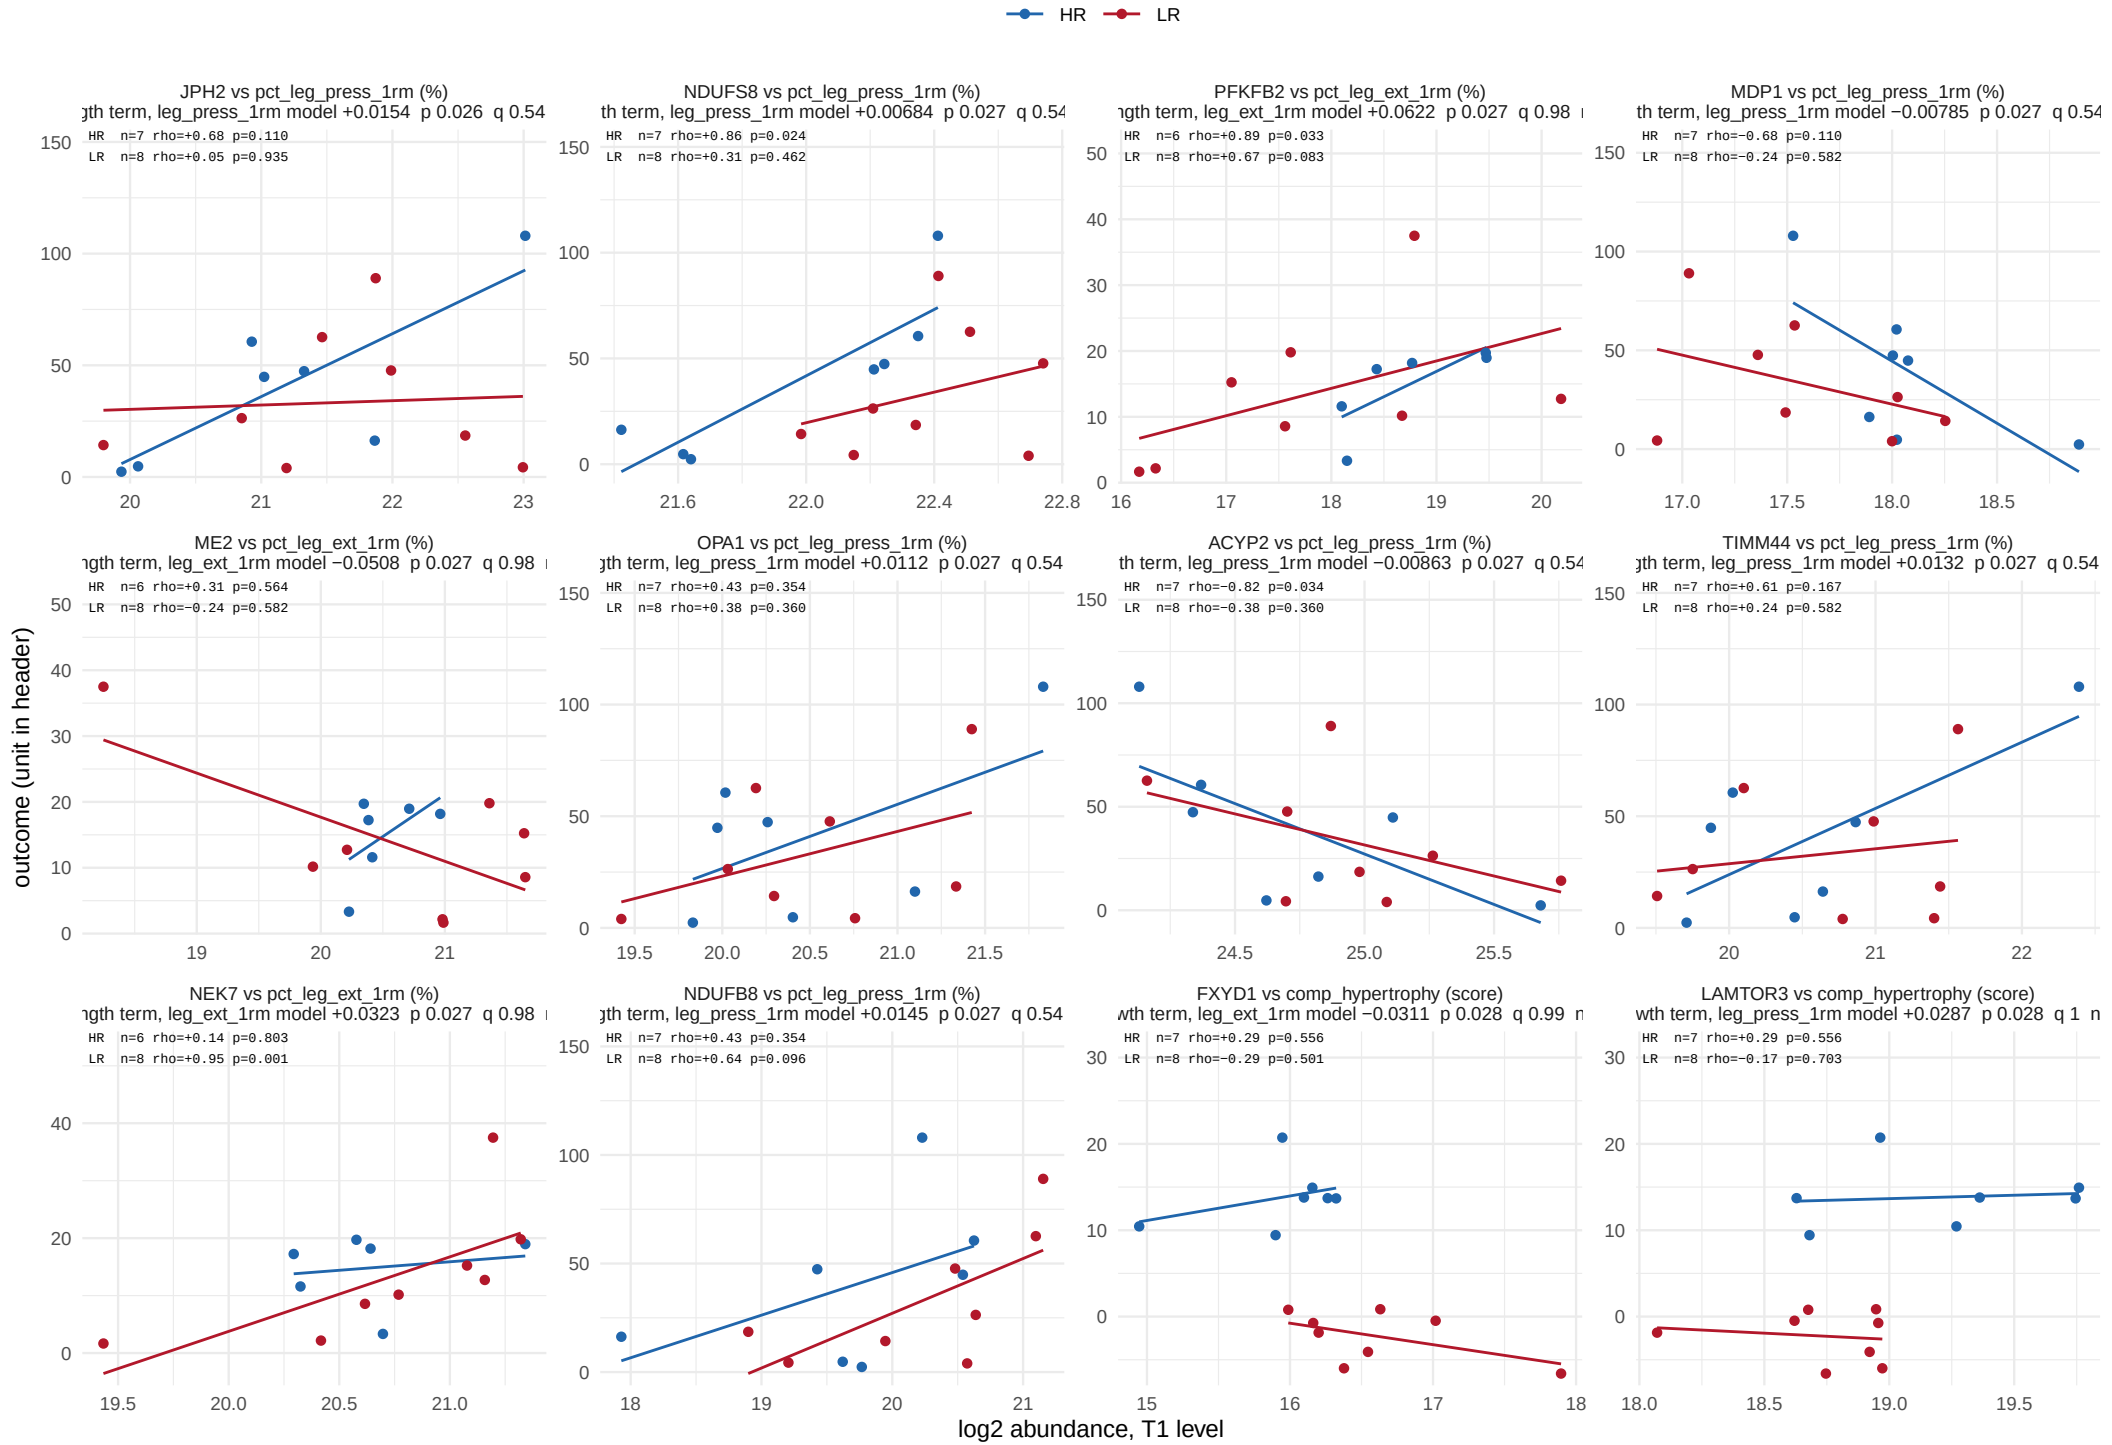

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, baseline window


387 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 20 of 33.

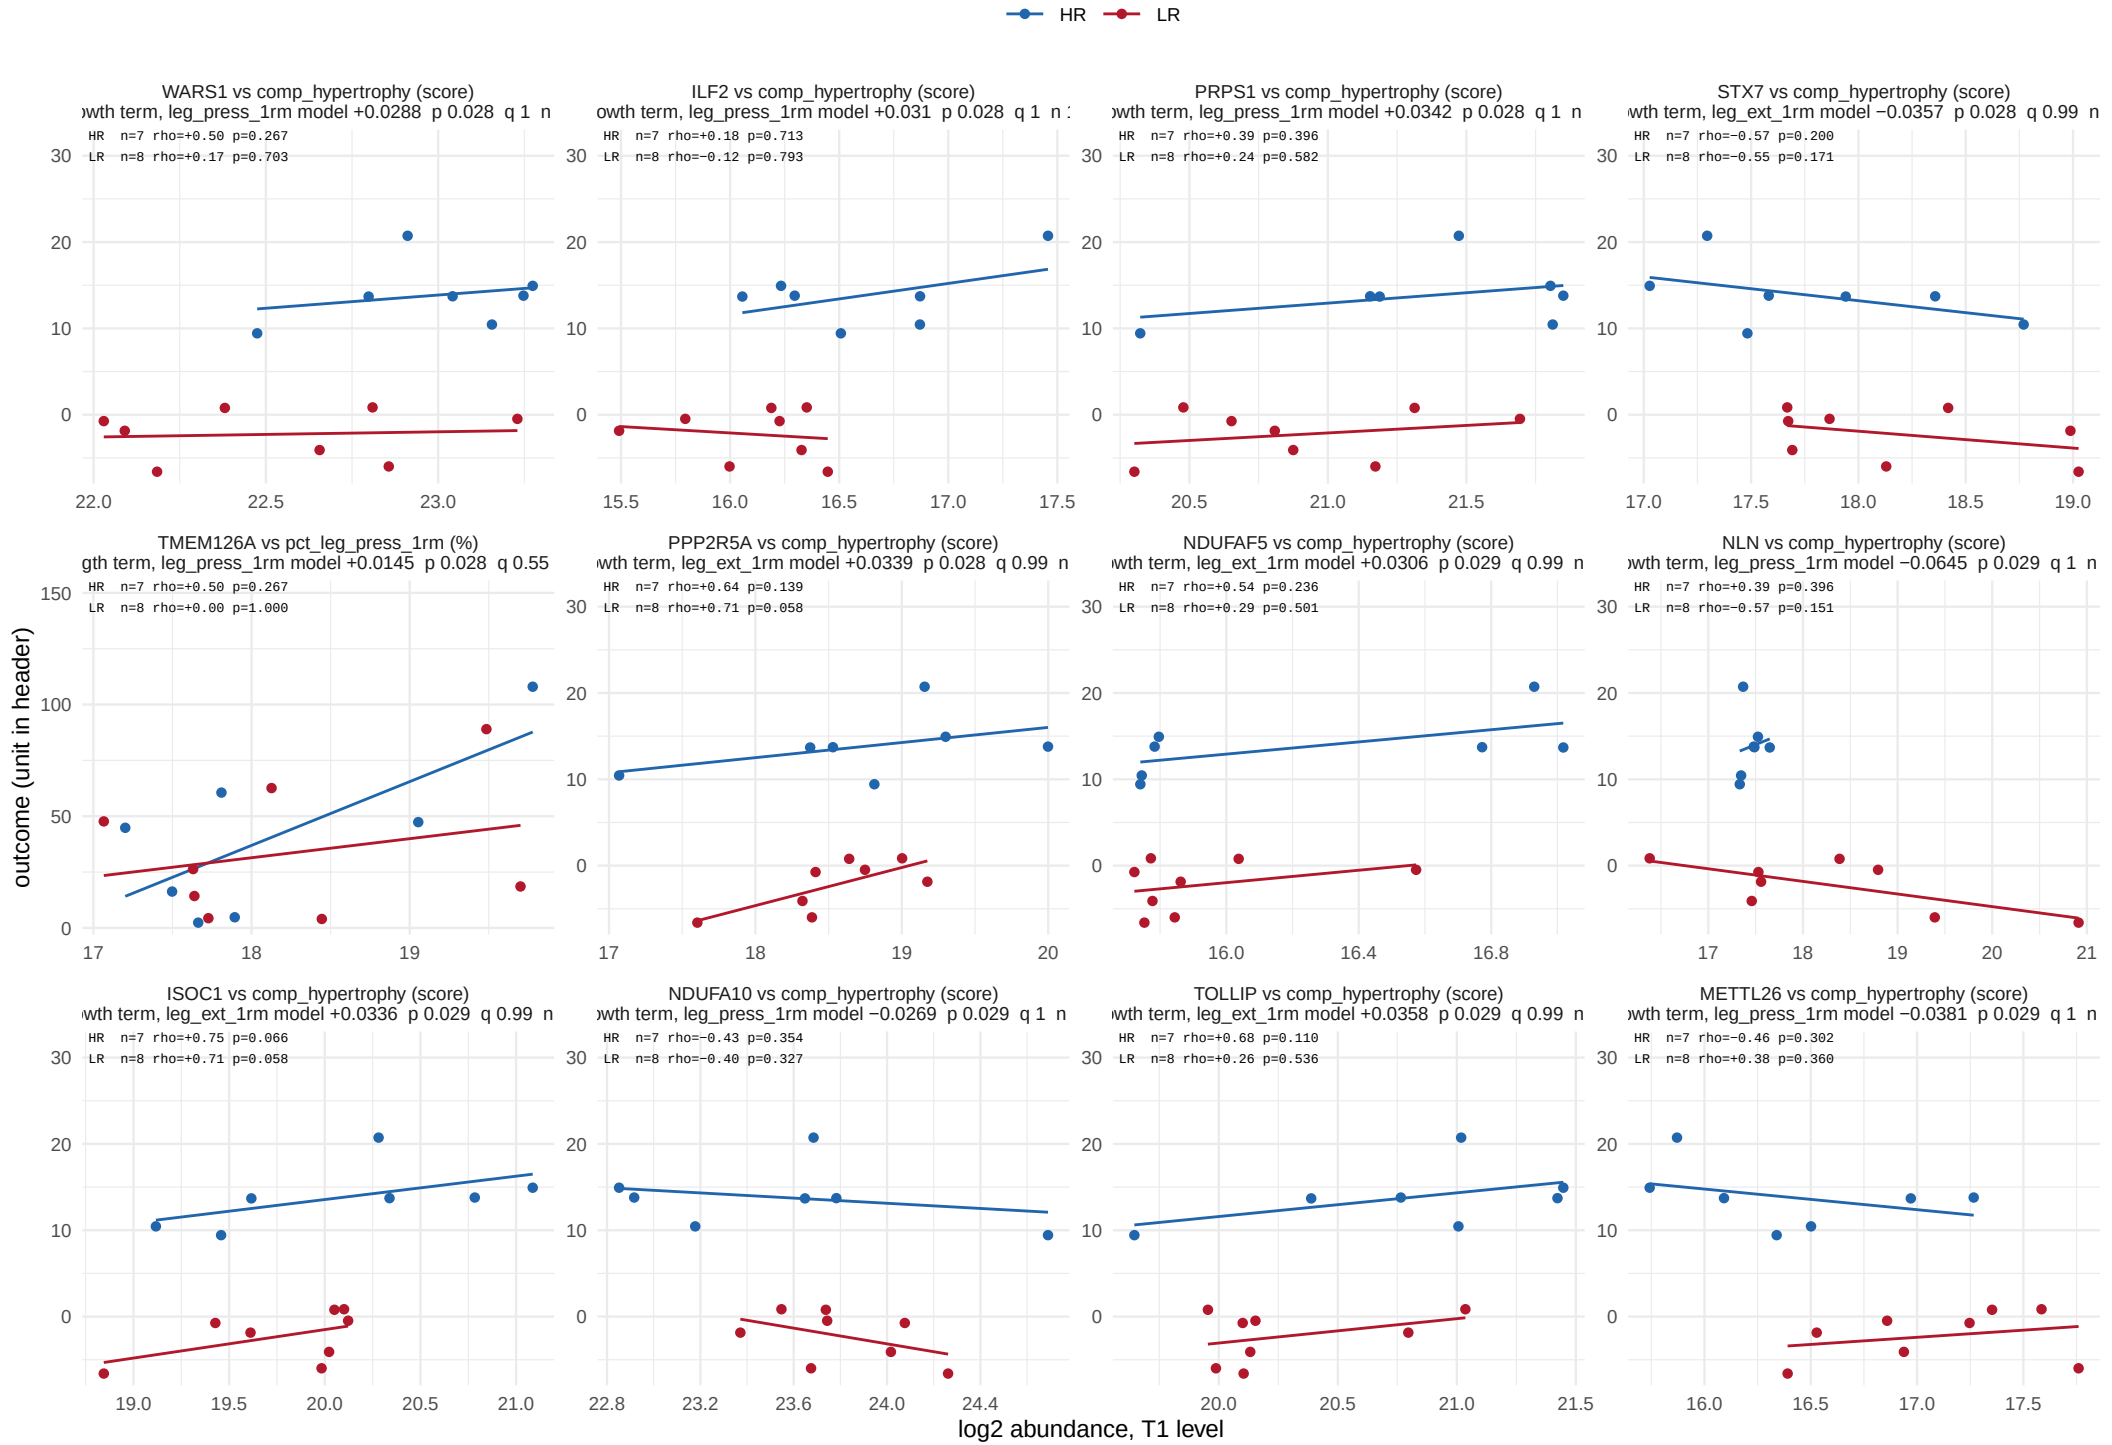

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, baseline window


387 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 21 of 33.

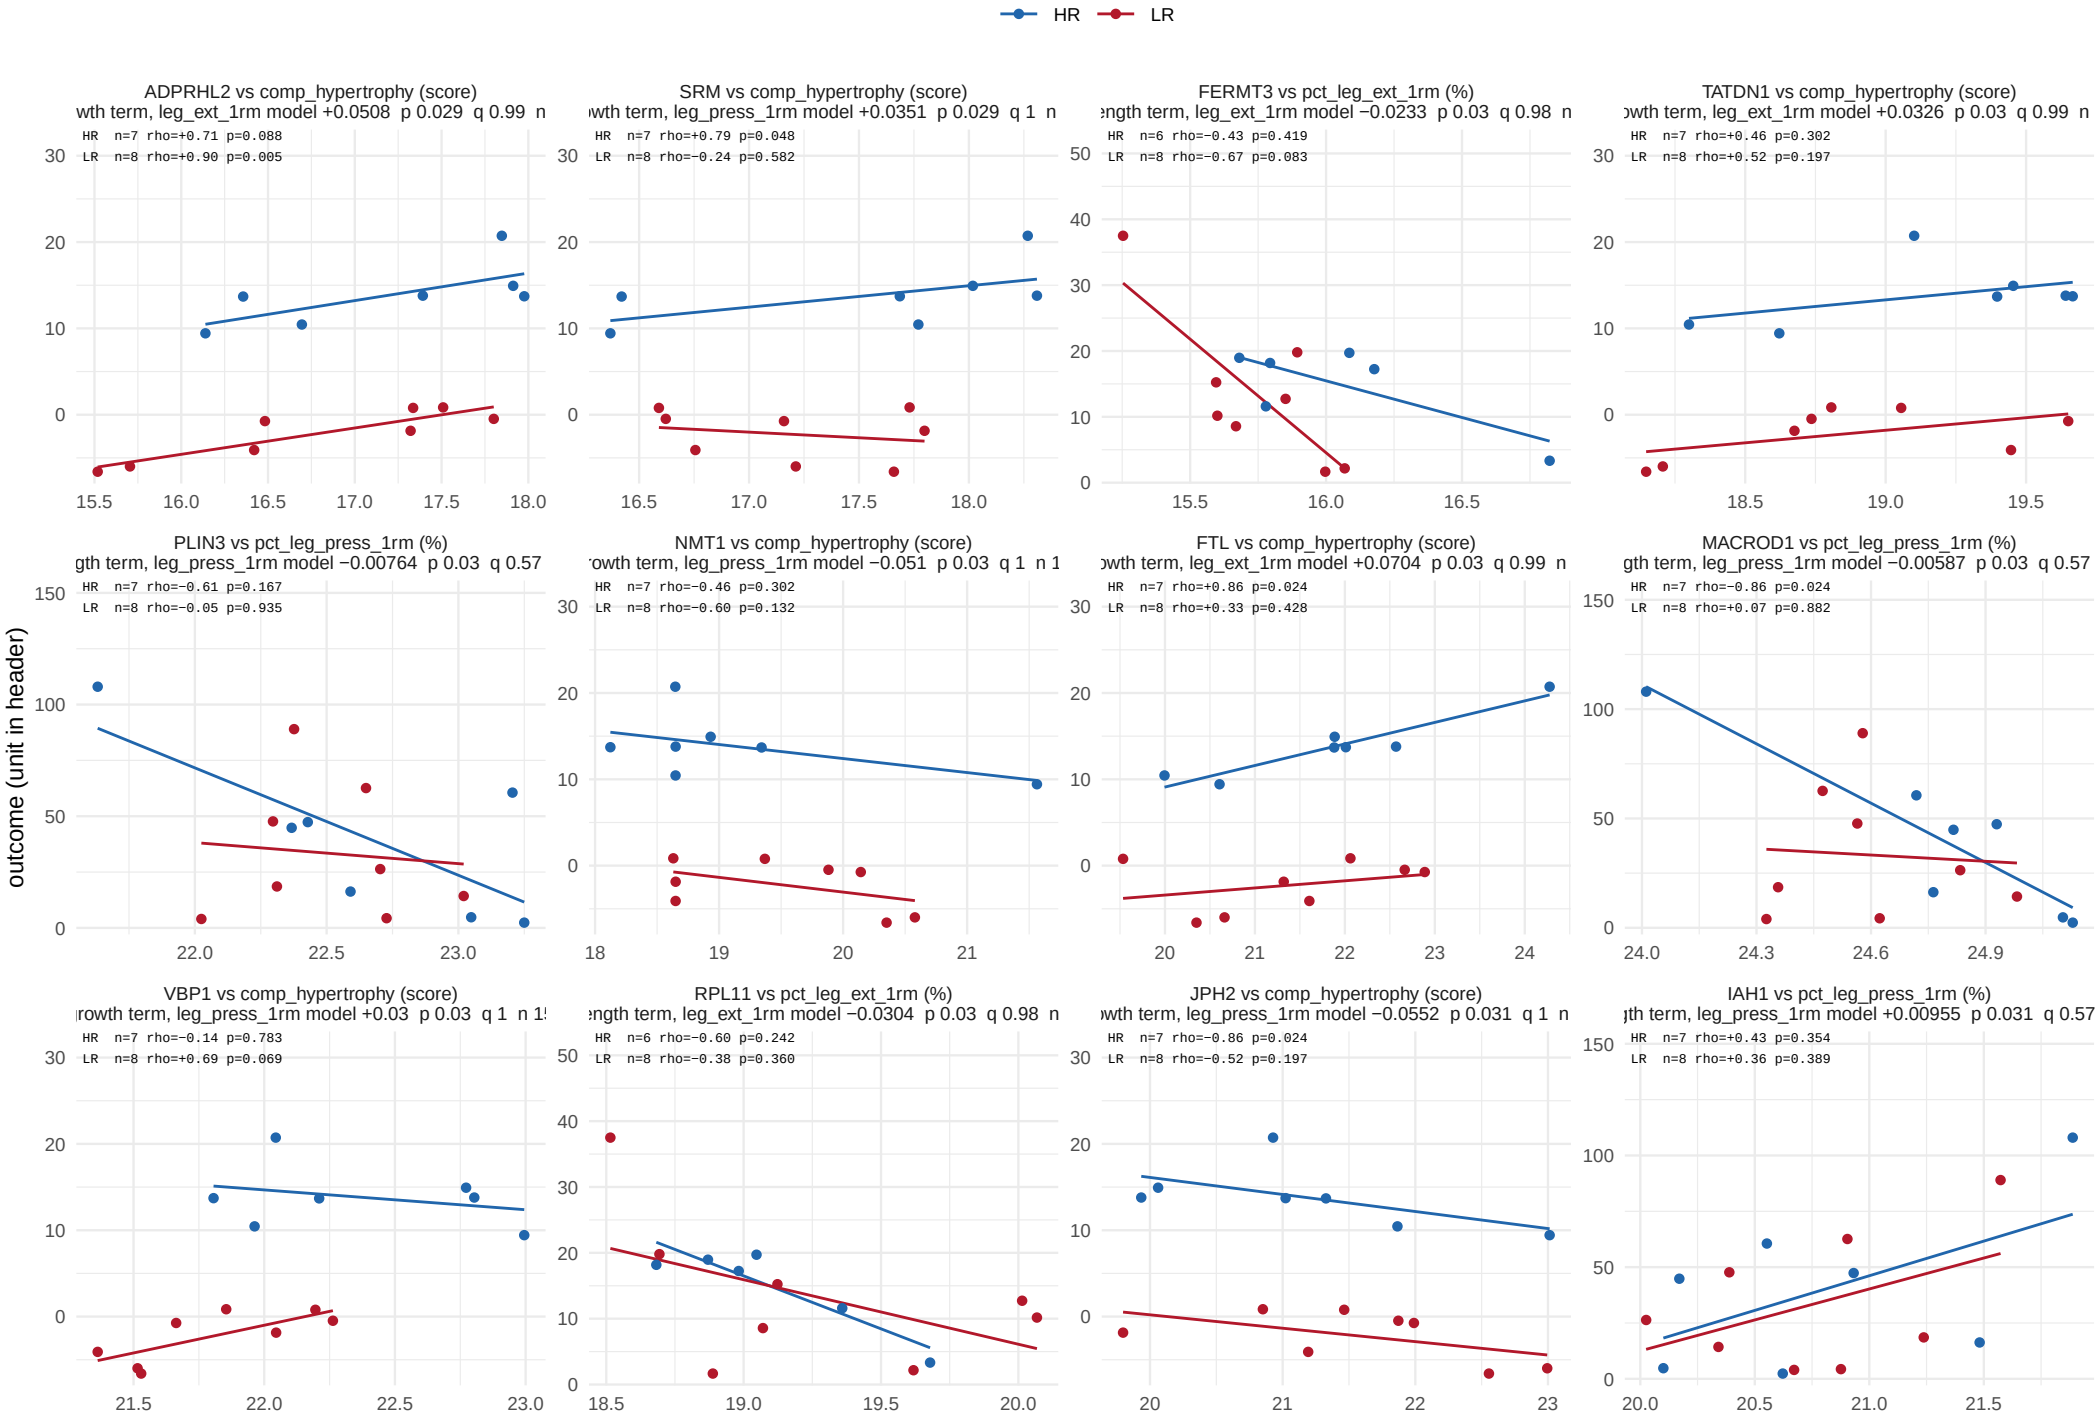

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, baseline window


387 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 22 of 33.

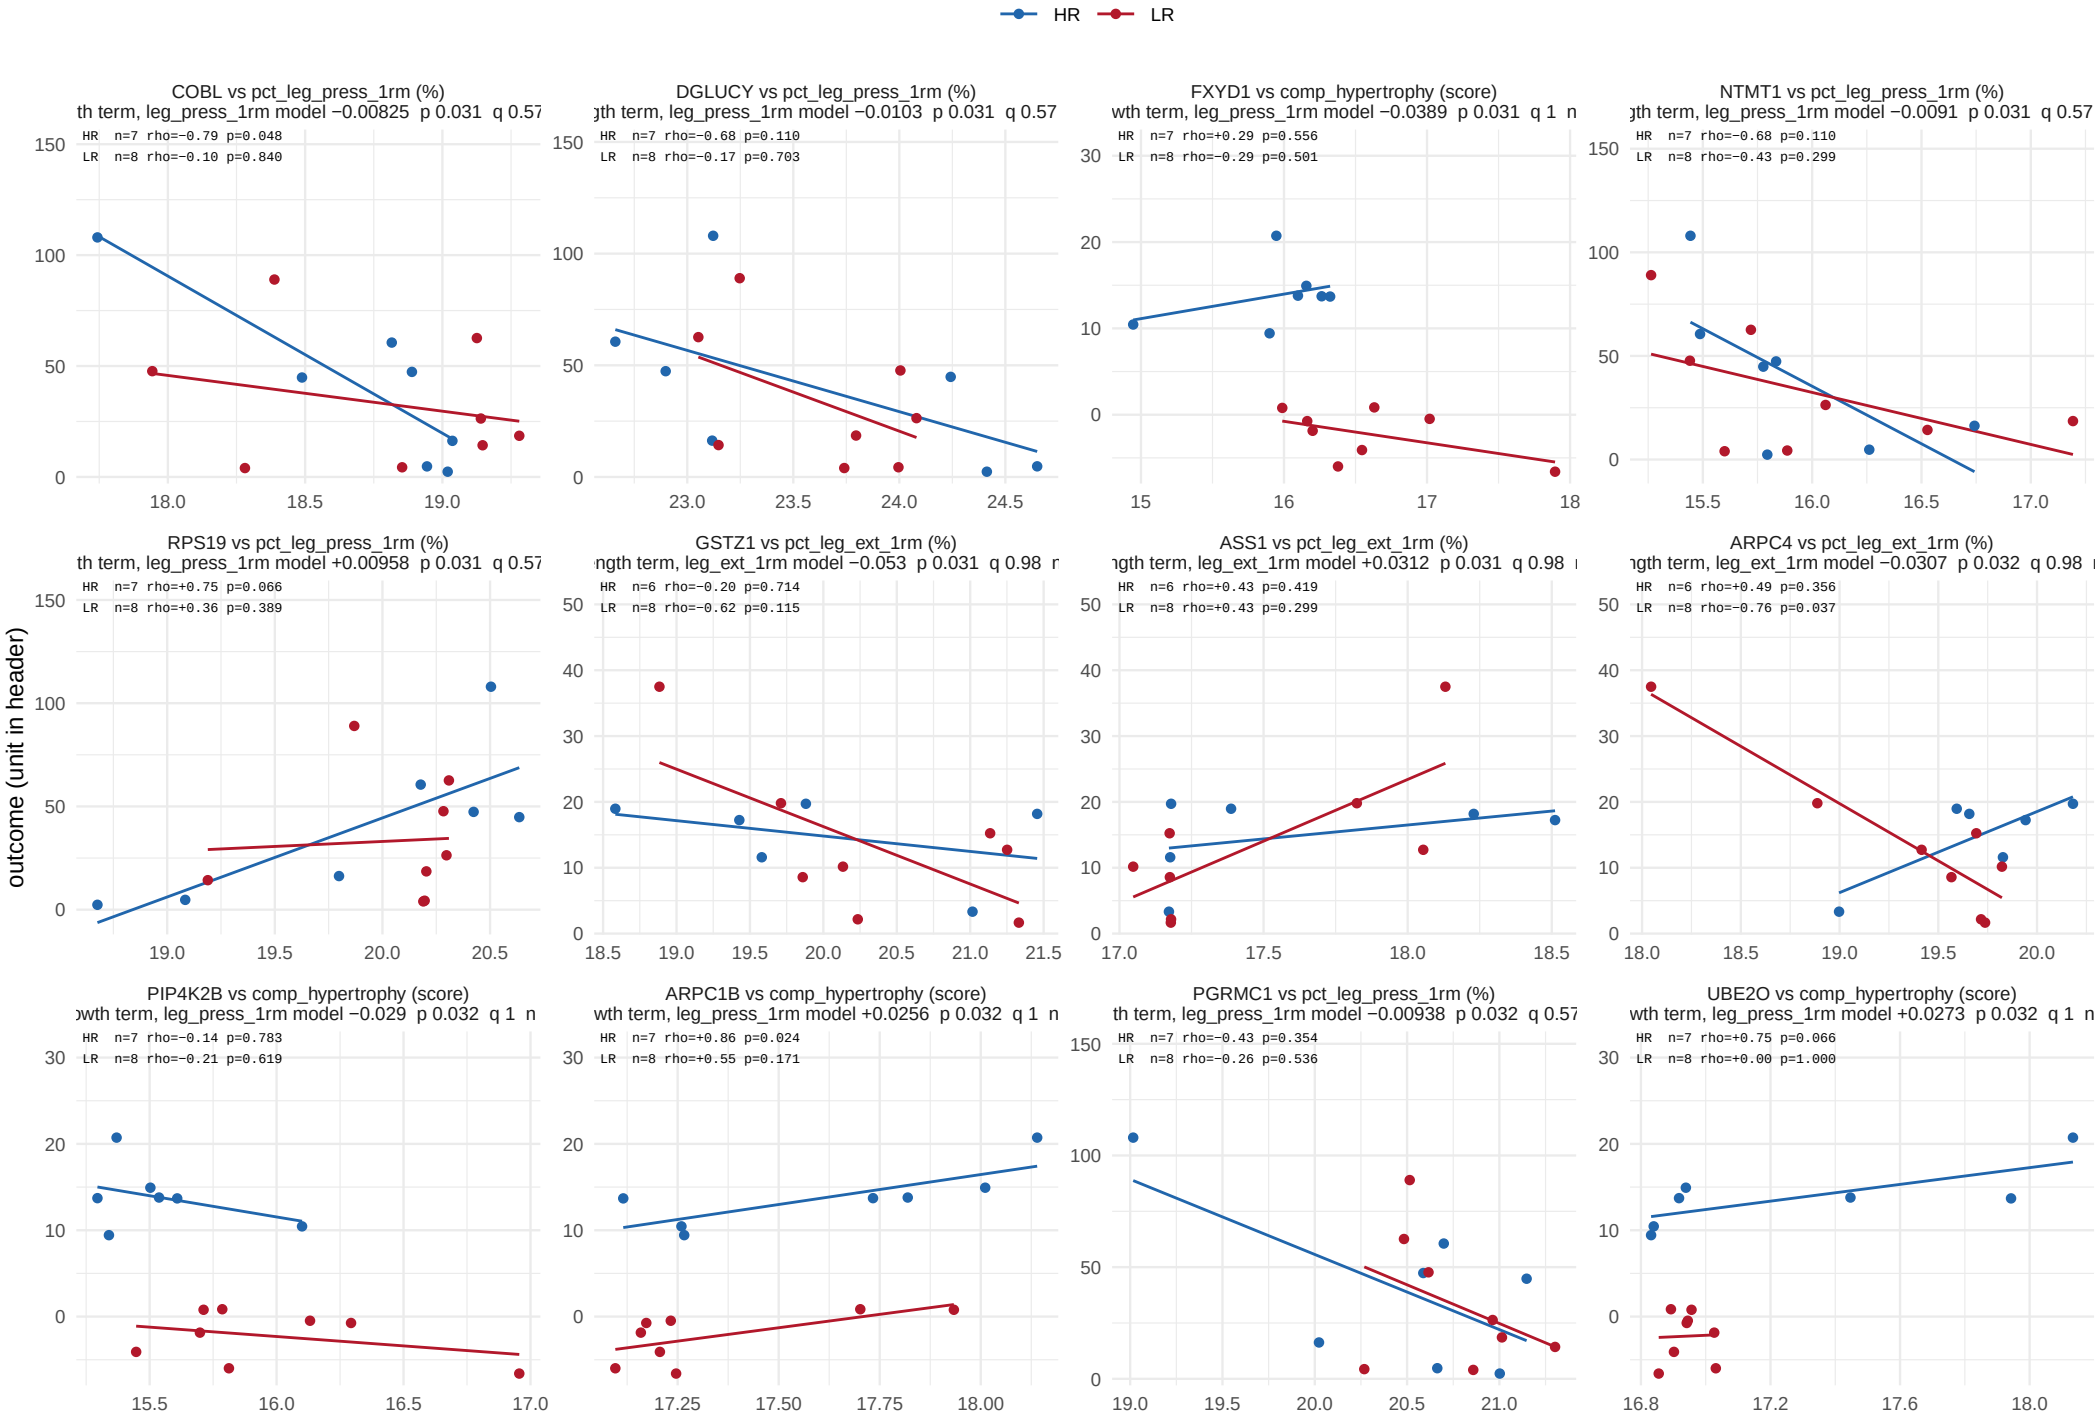

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, baseline window


387 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 23 of 33.

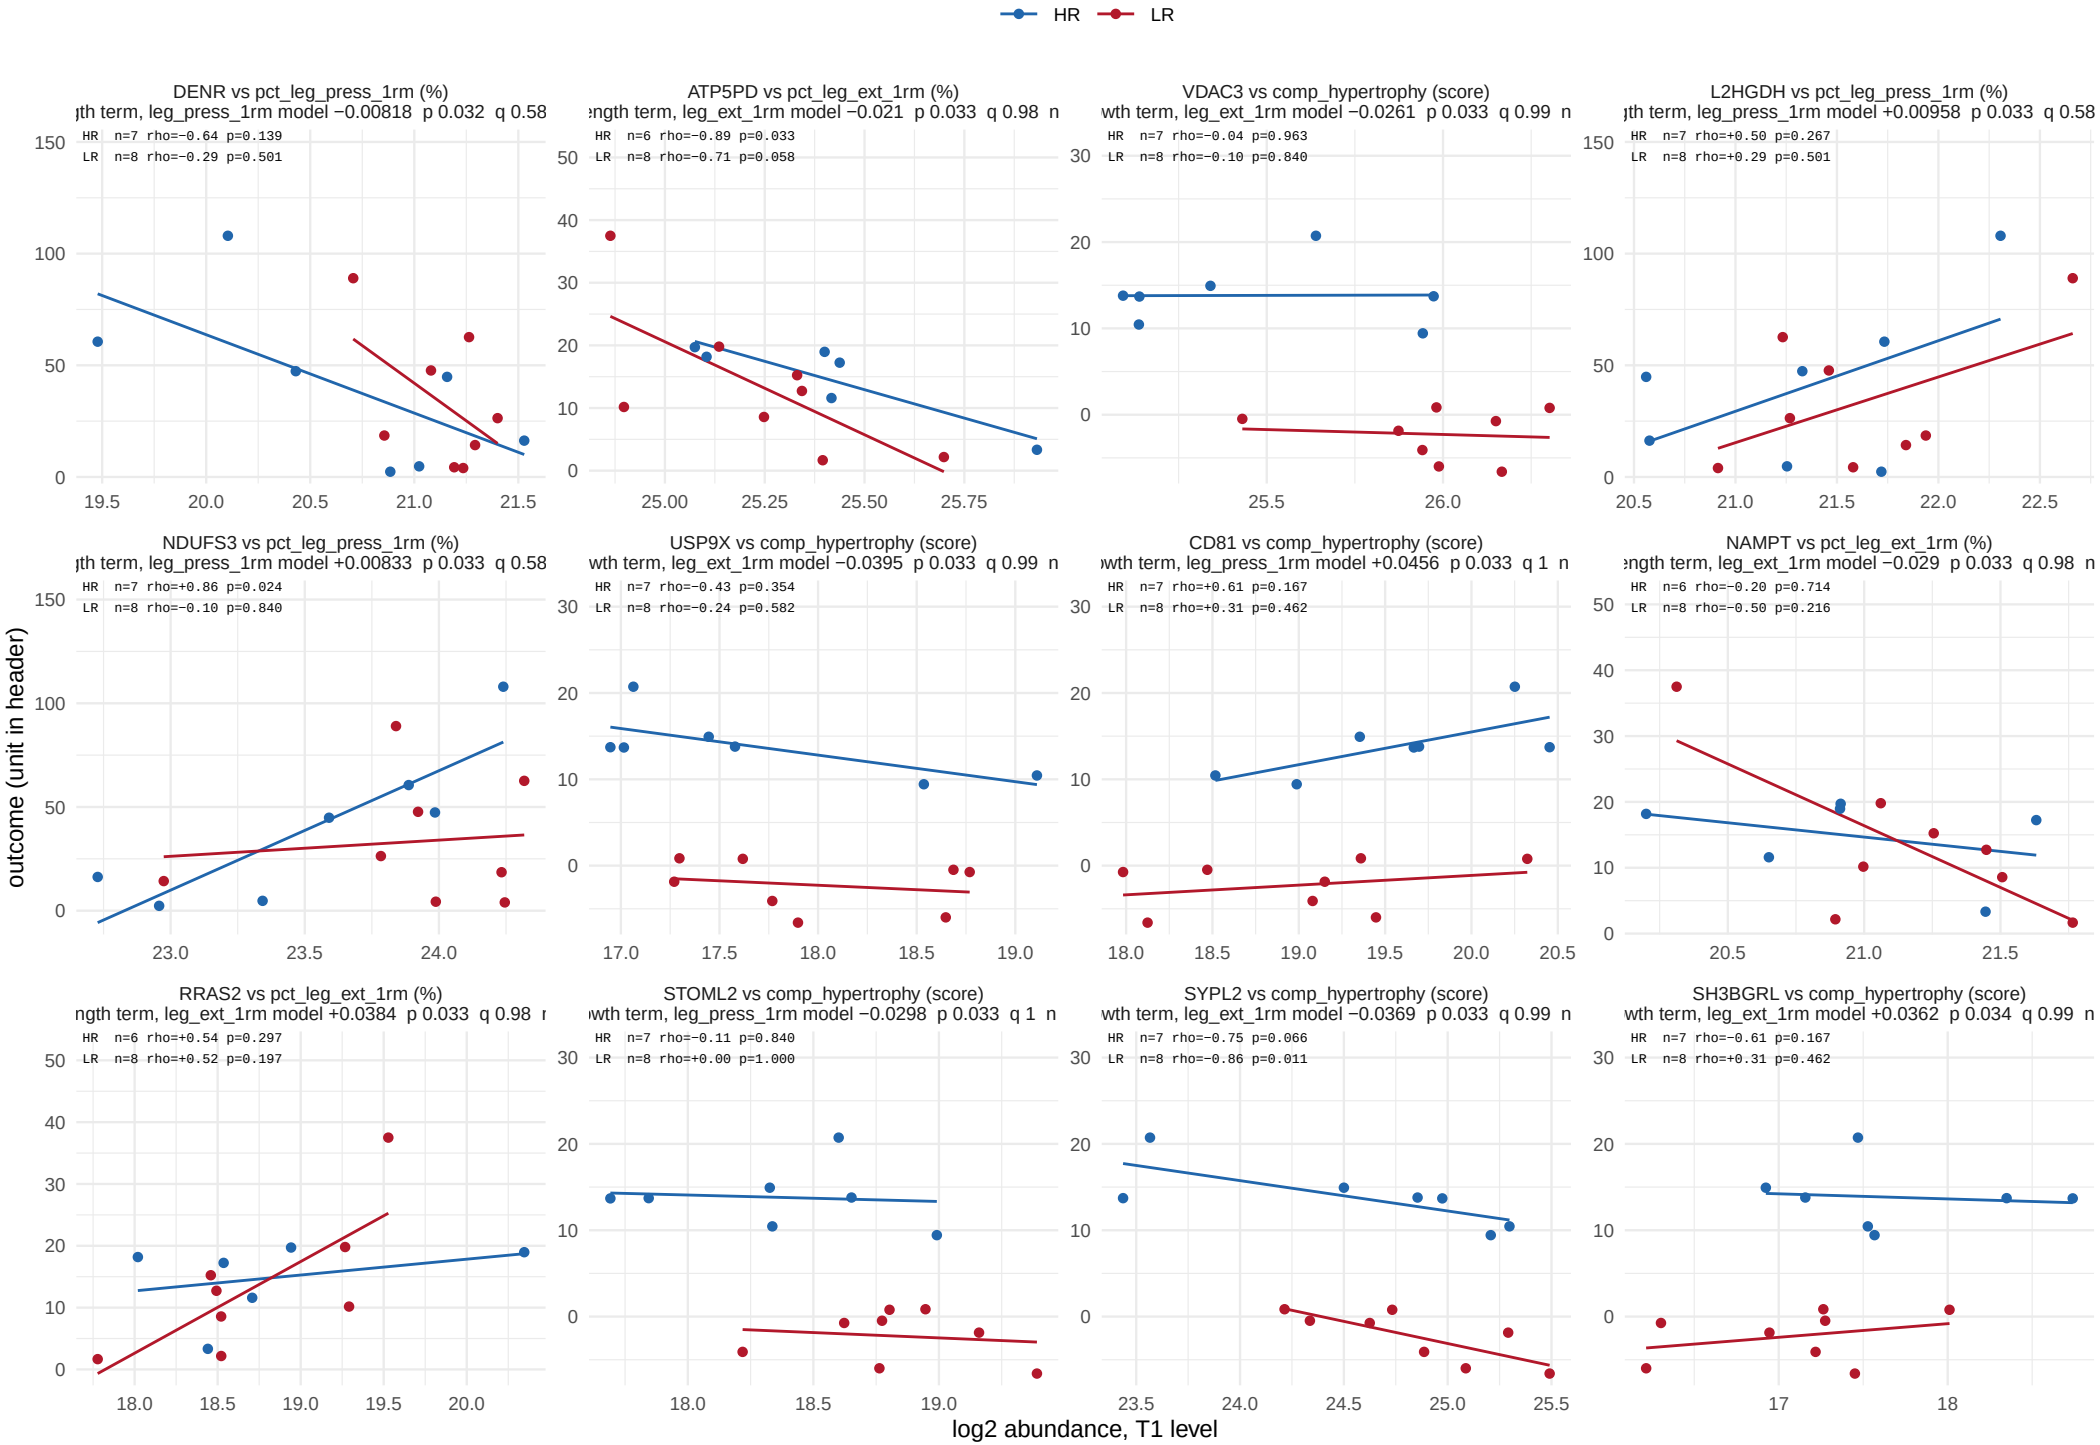

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, baseline window


387 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 24 of 33.

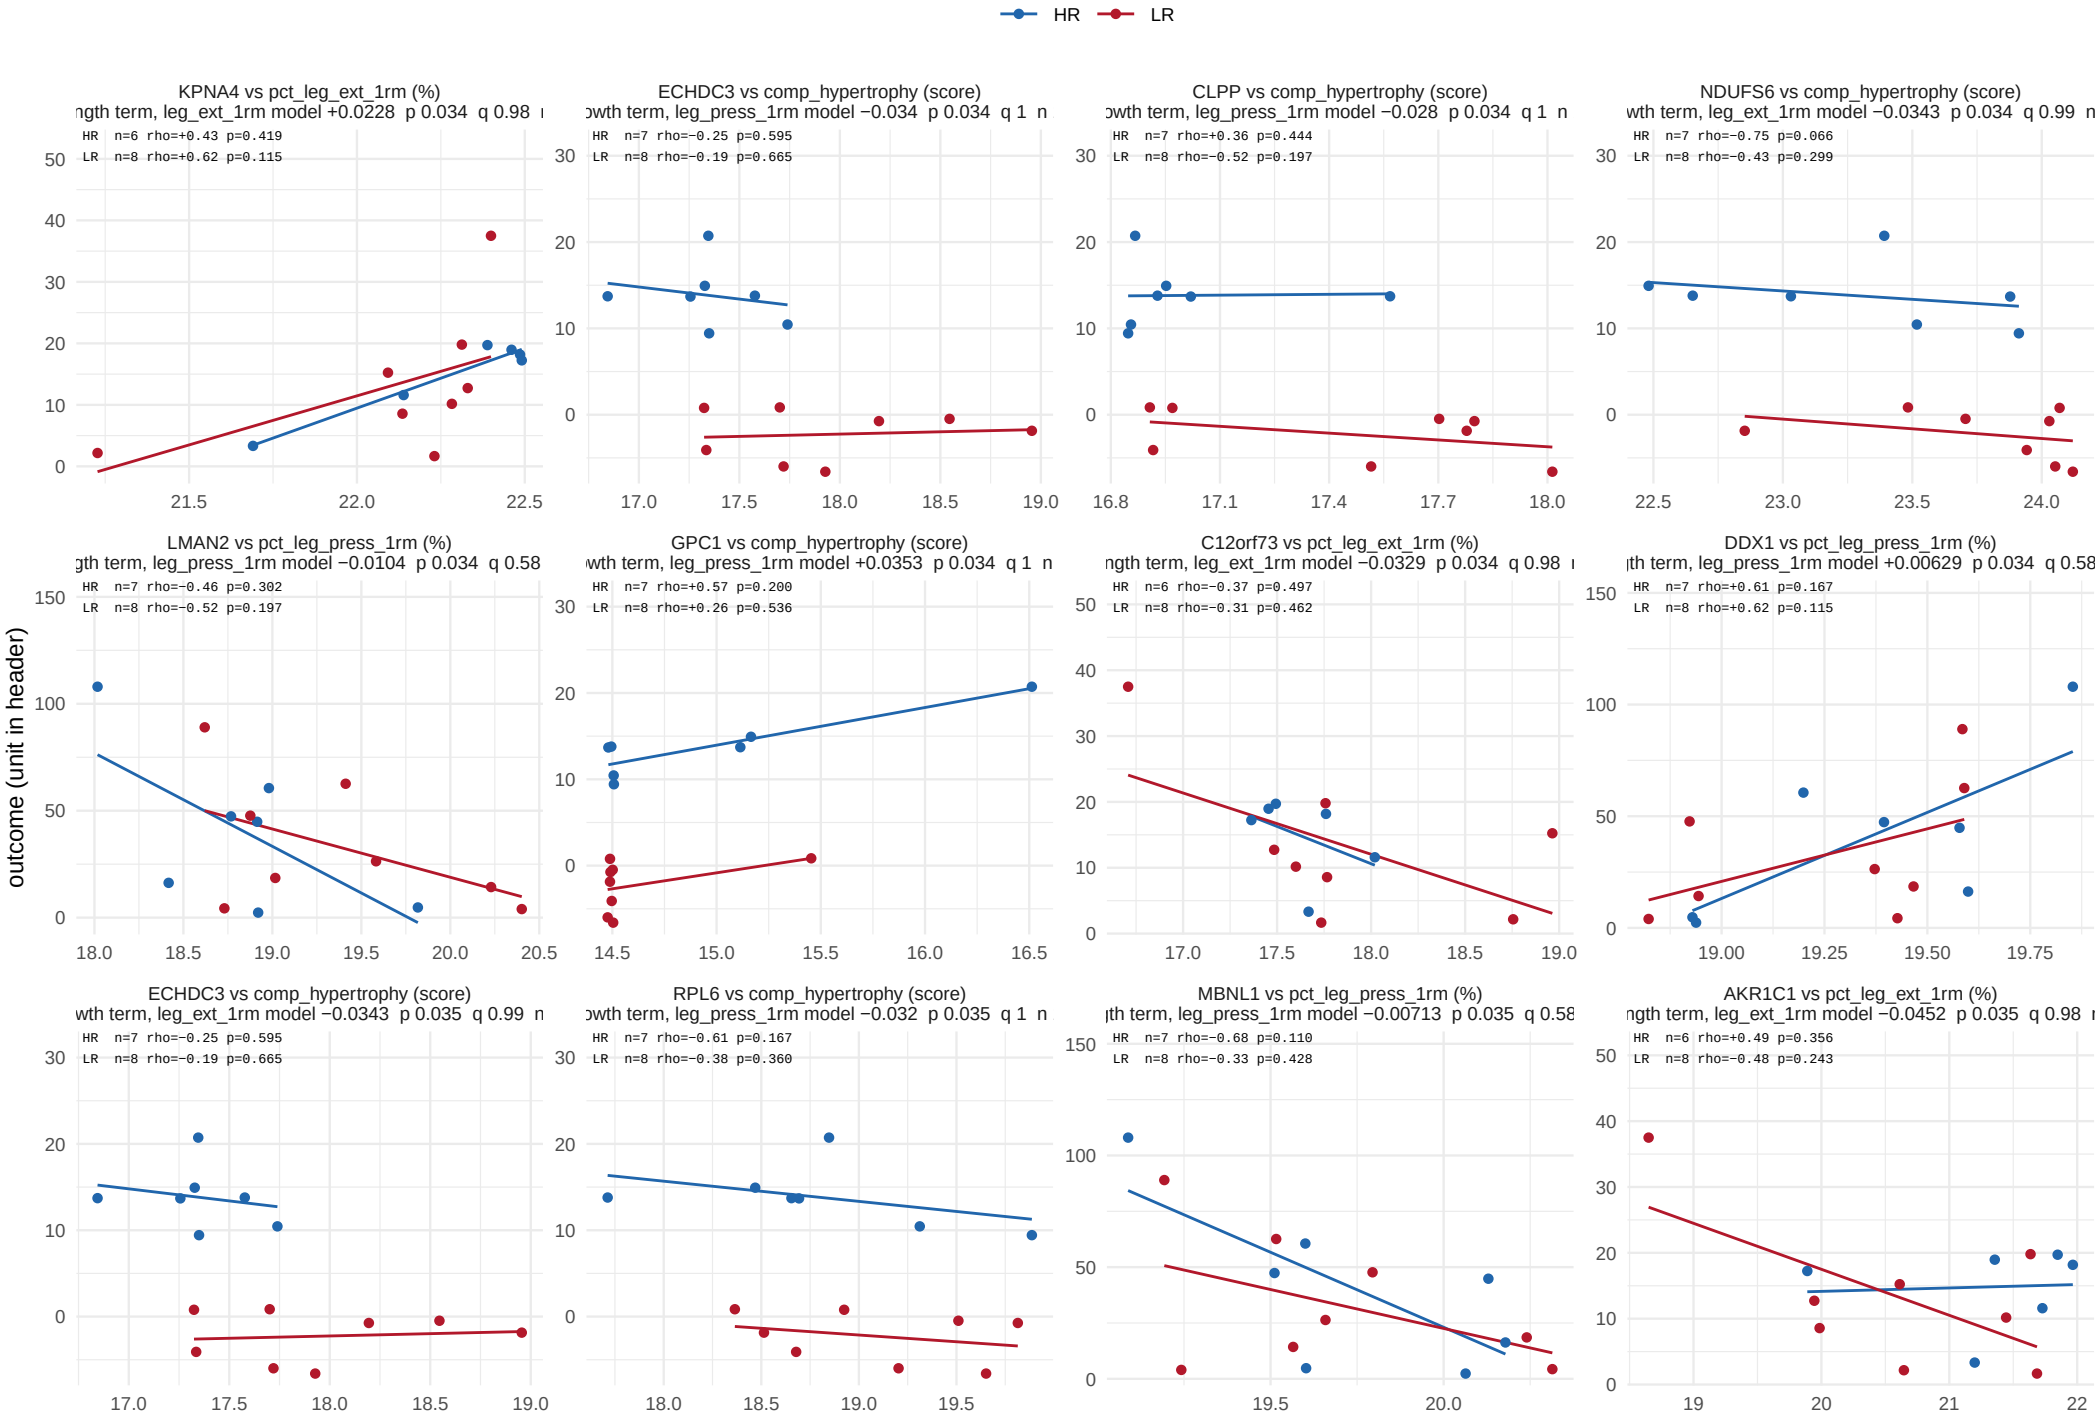

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, baseline window


387 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 25 of 33.

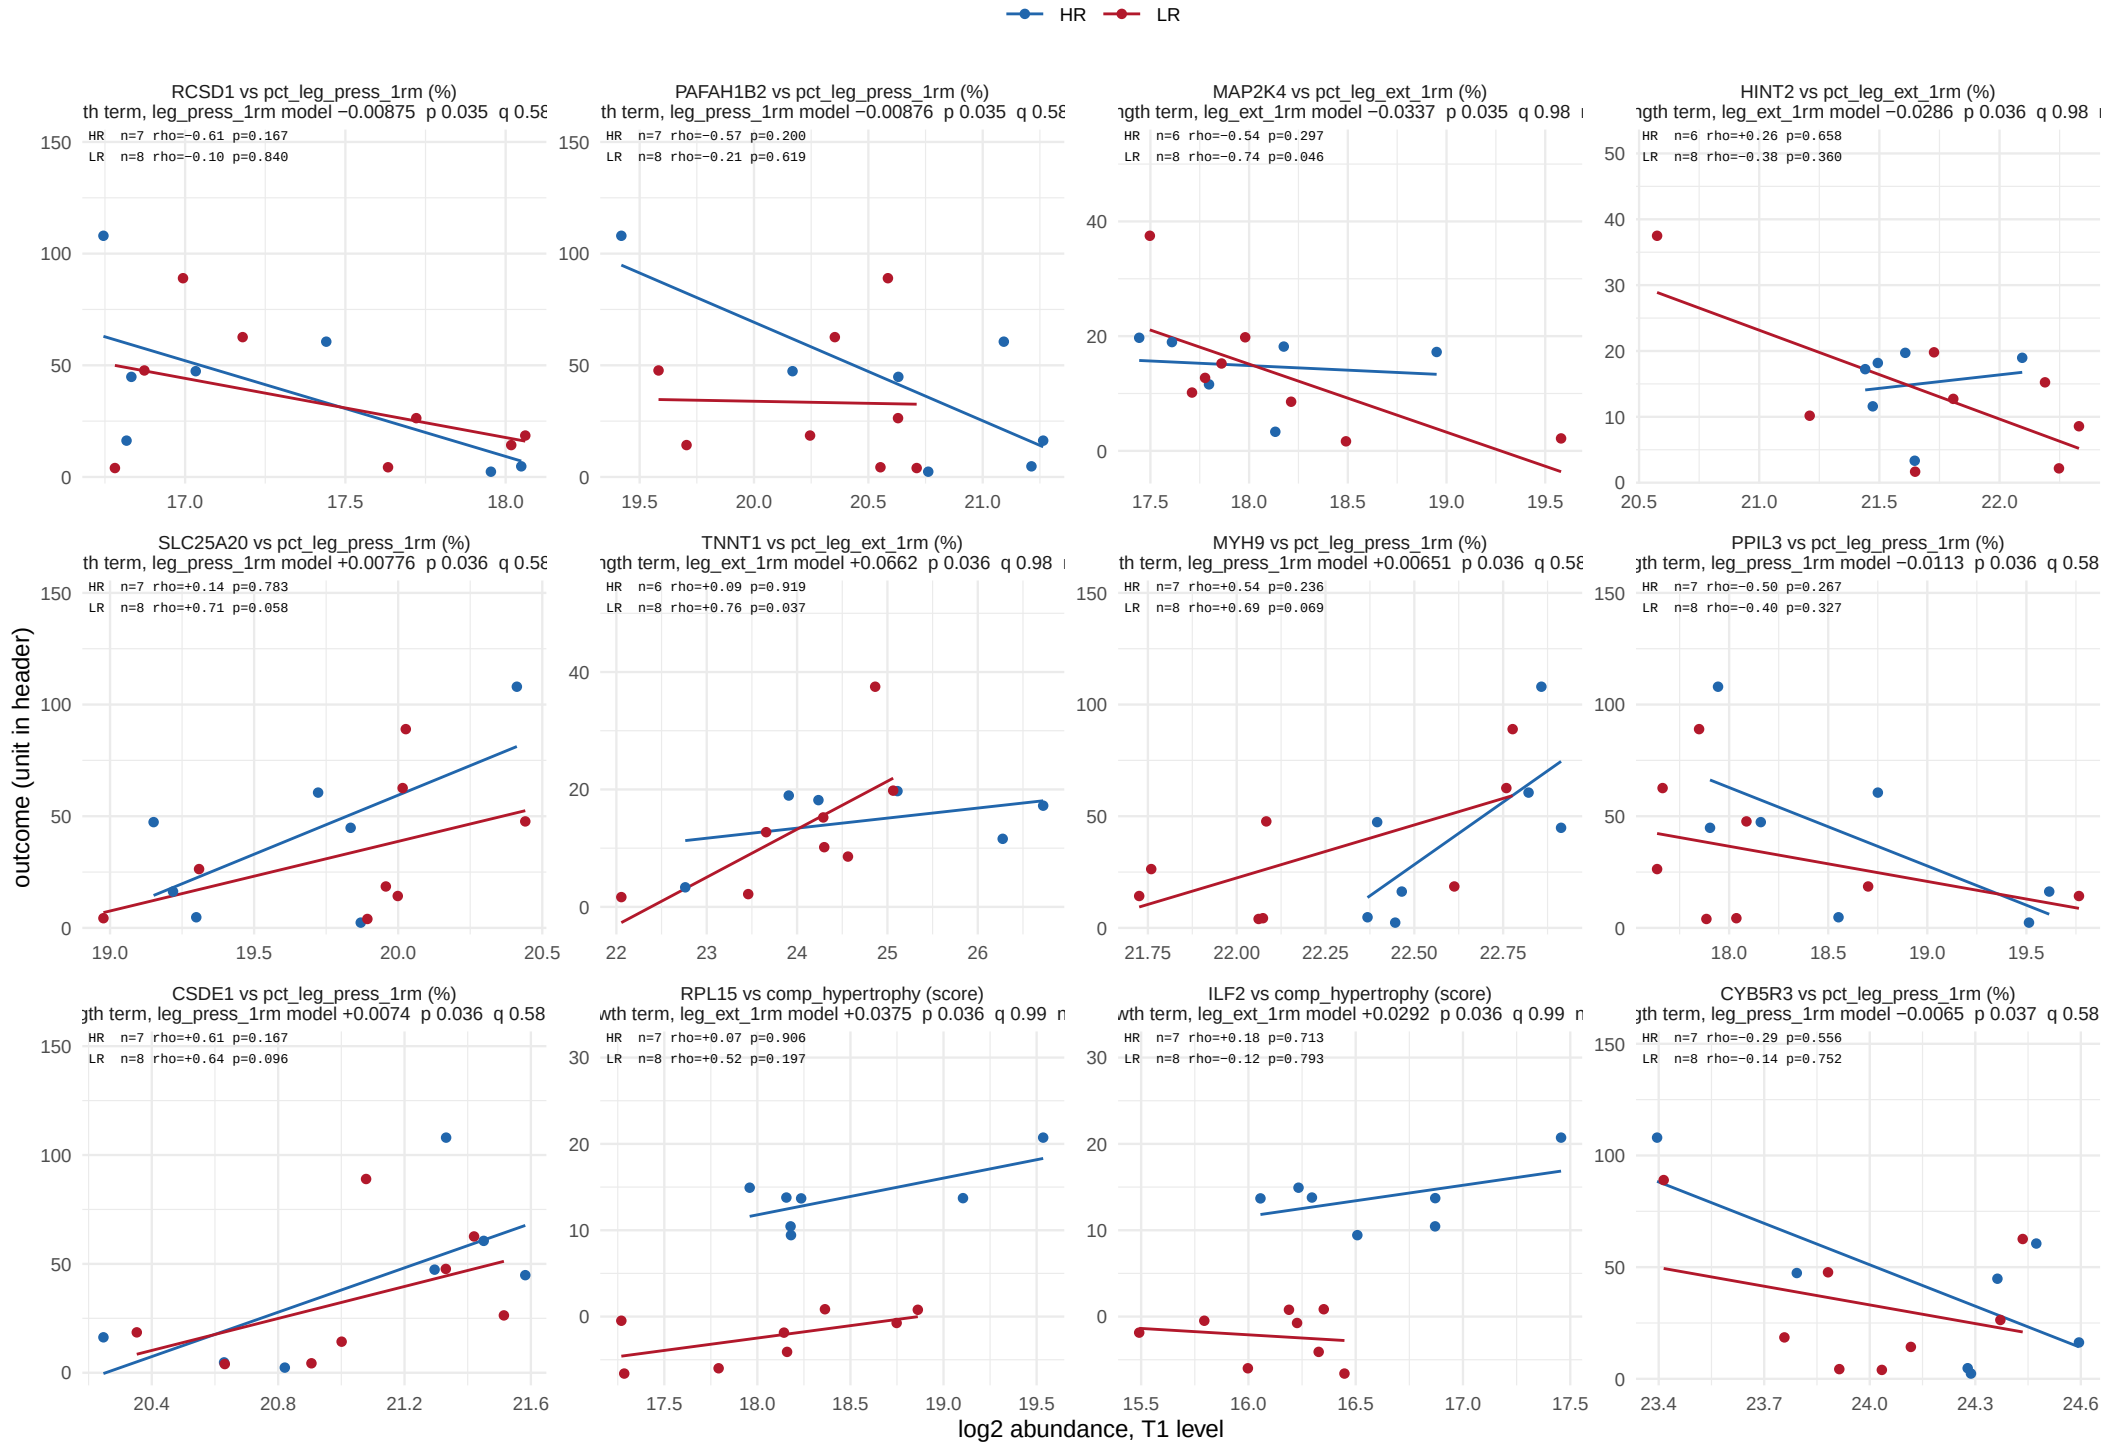

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, baseline window


387 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 26 of 33.

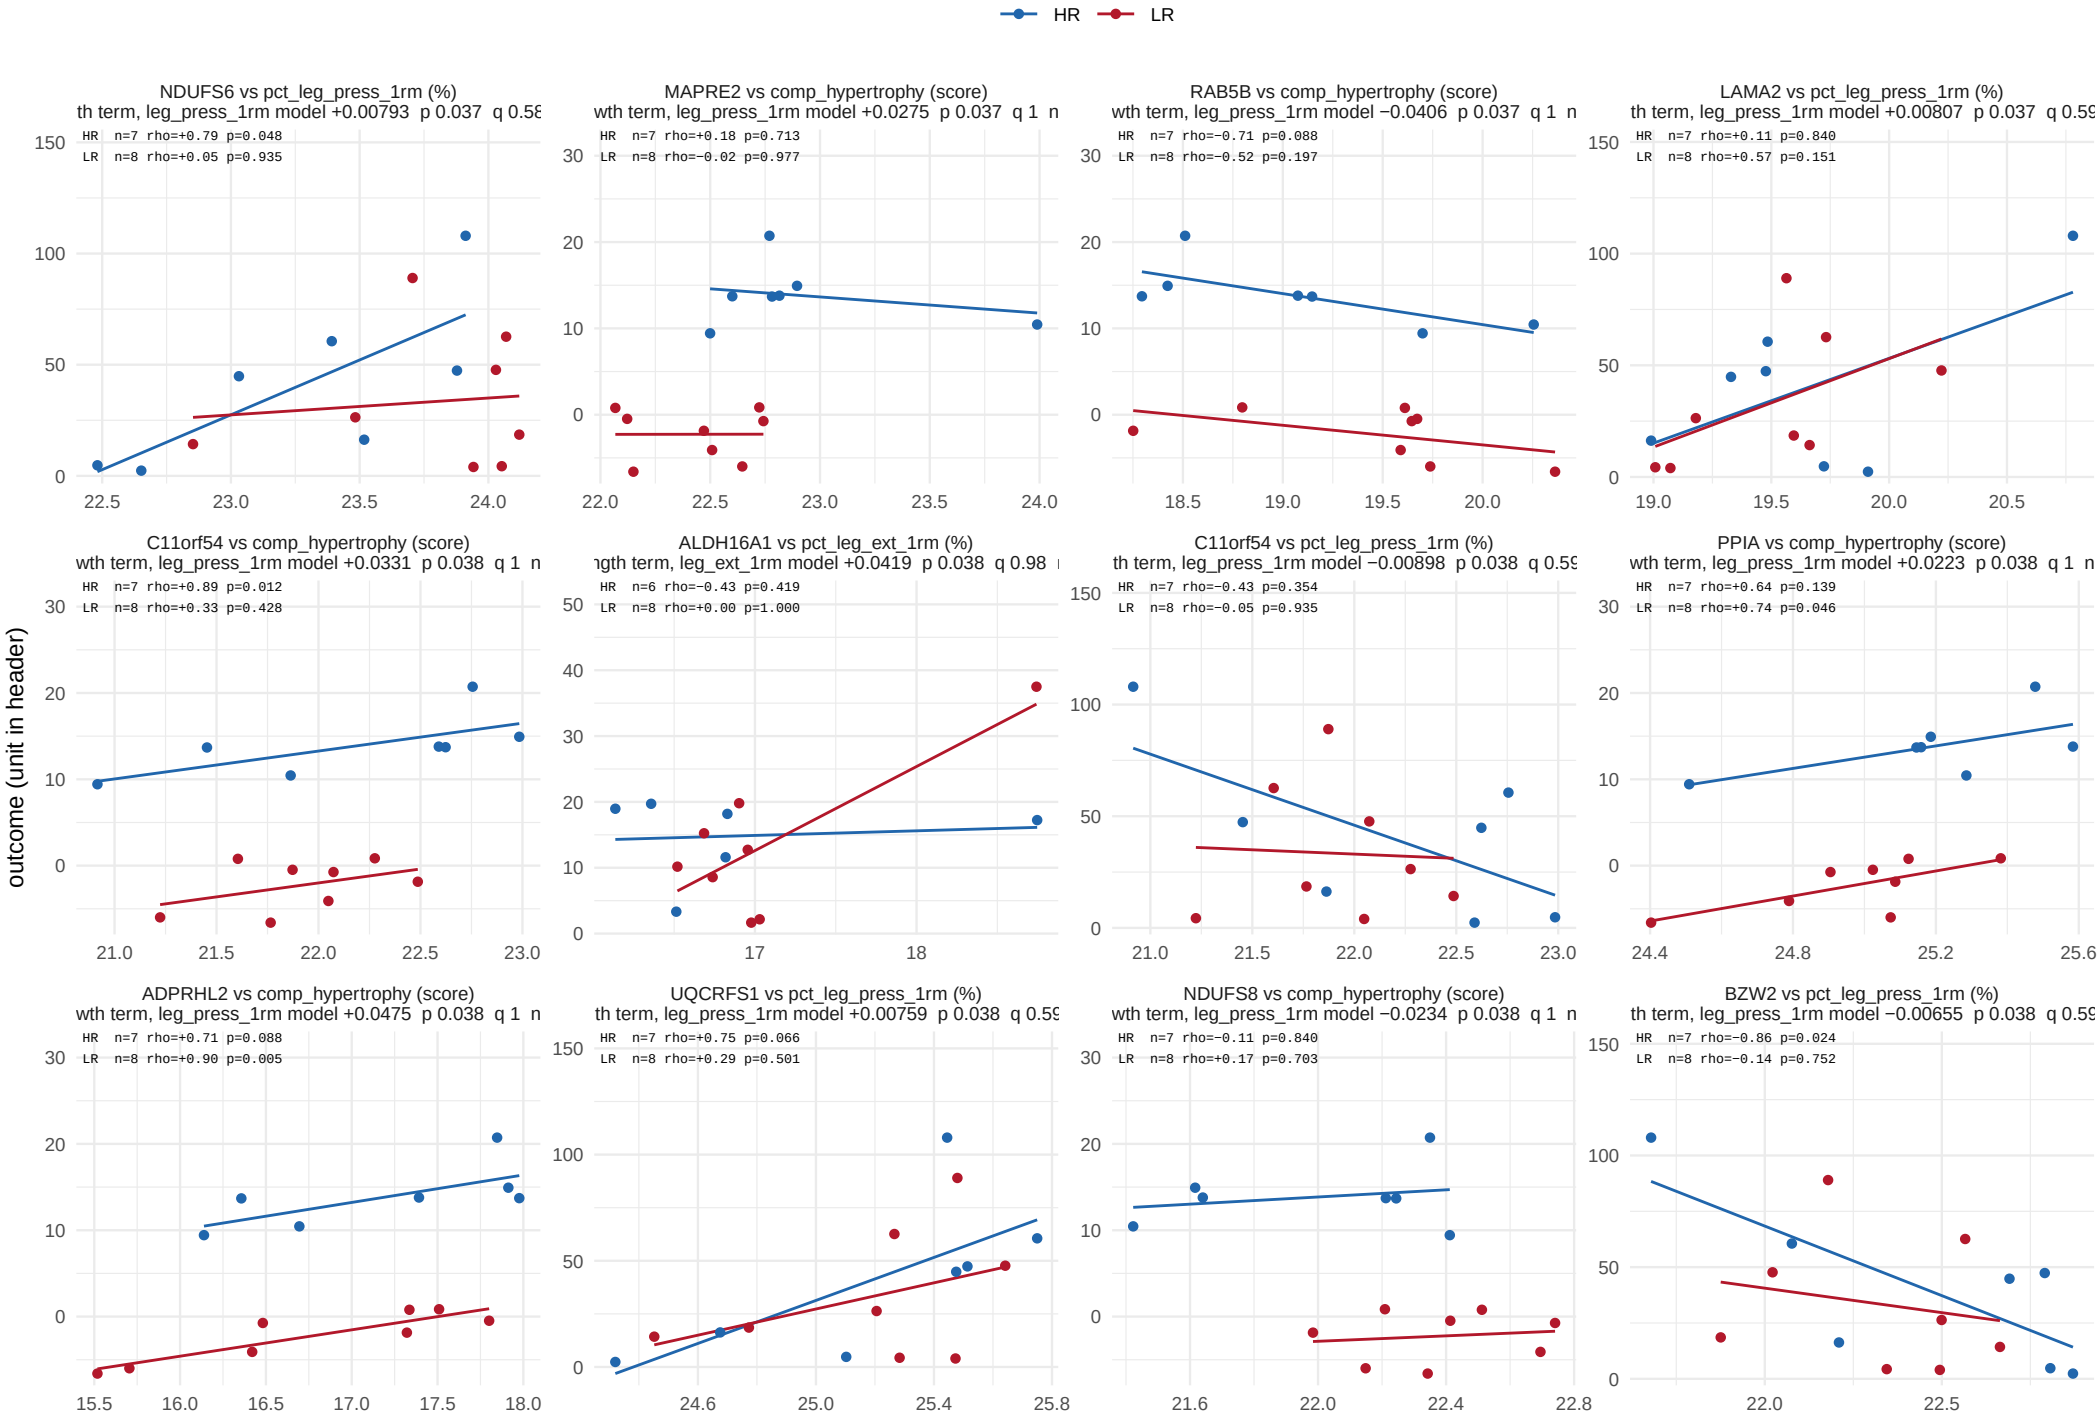

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, baseline window


387 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 27 of 33.

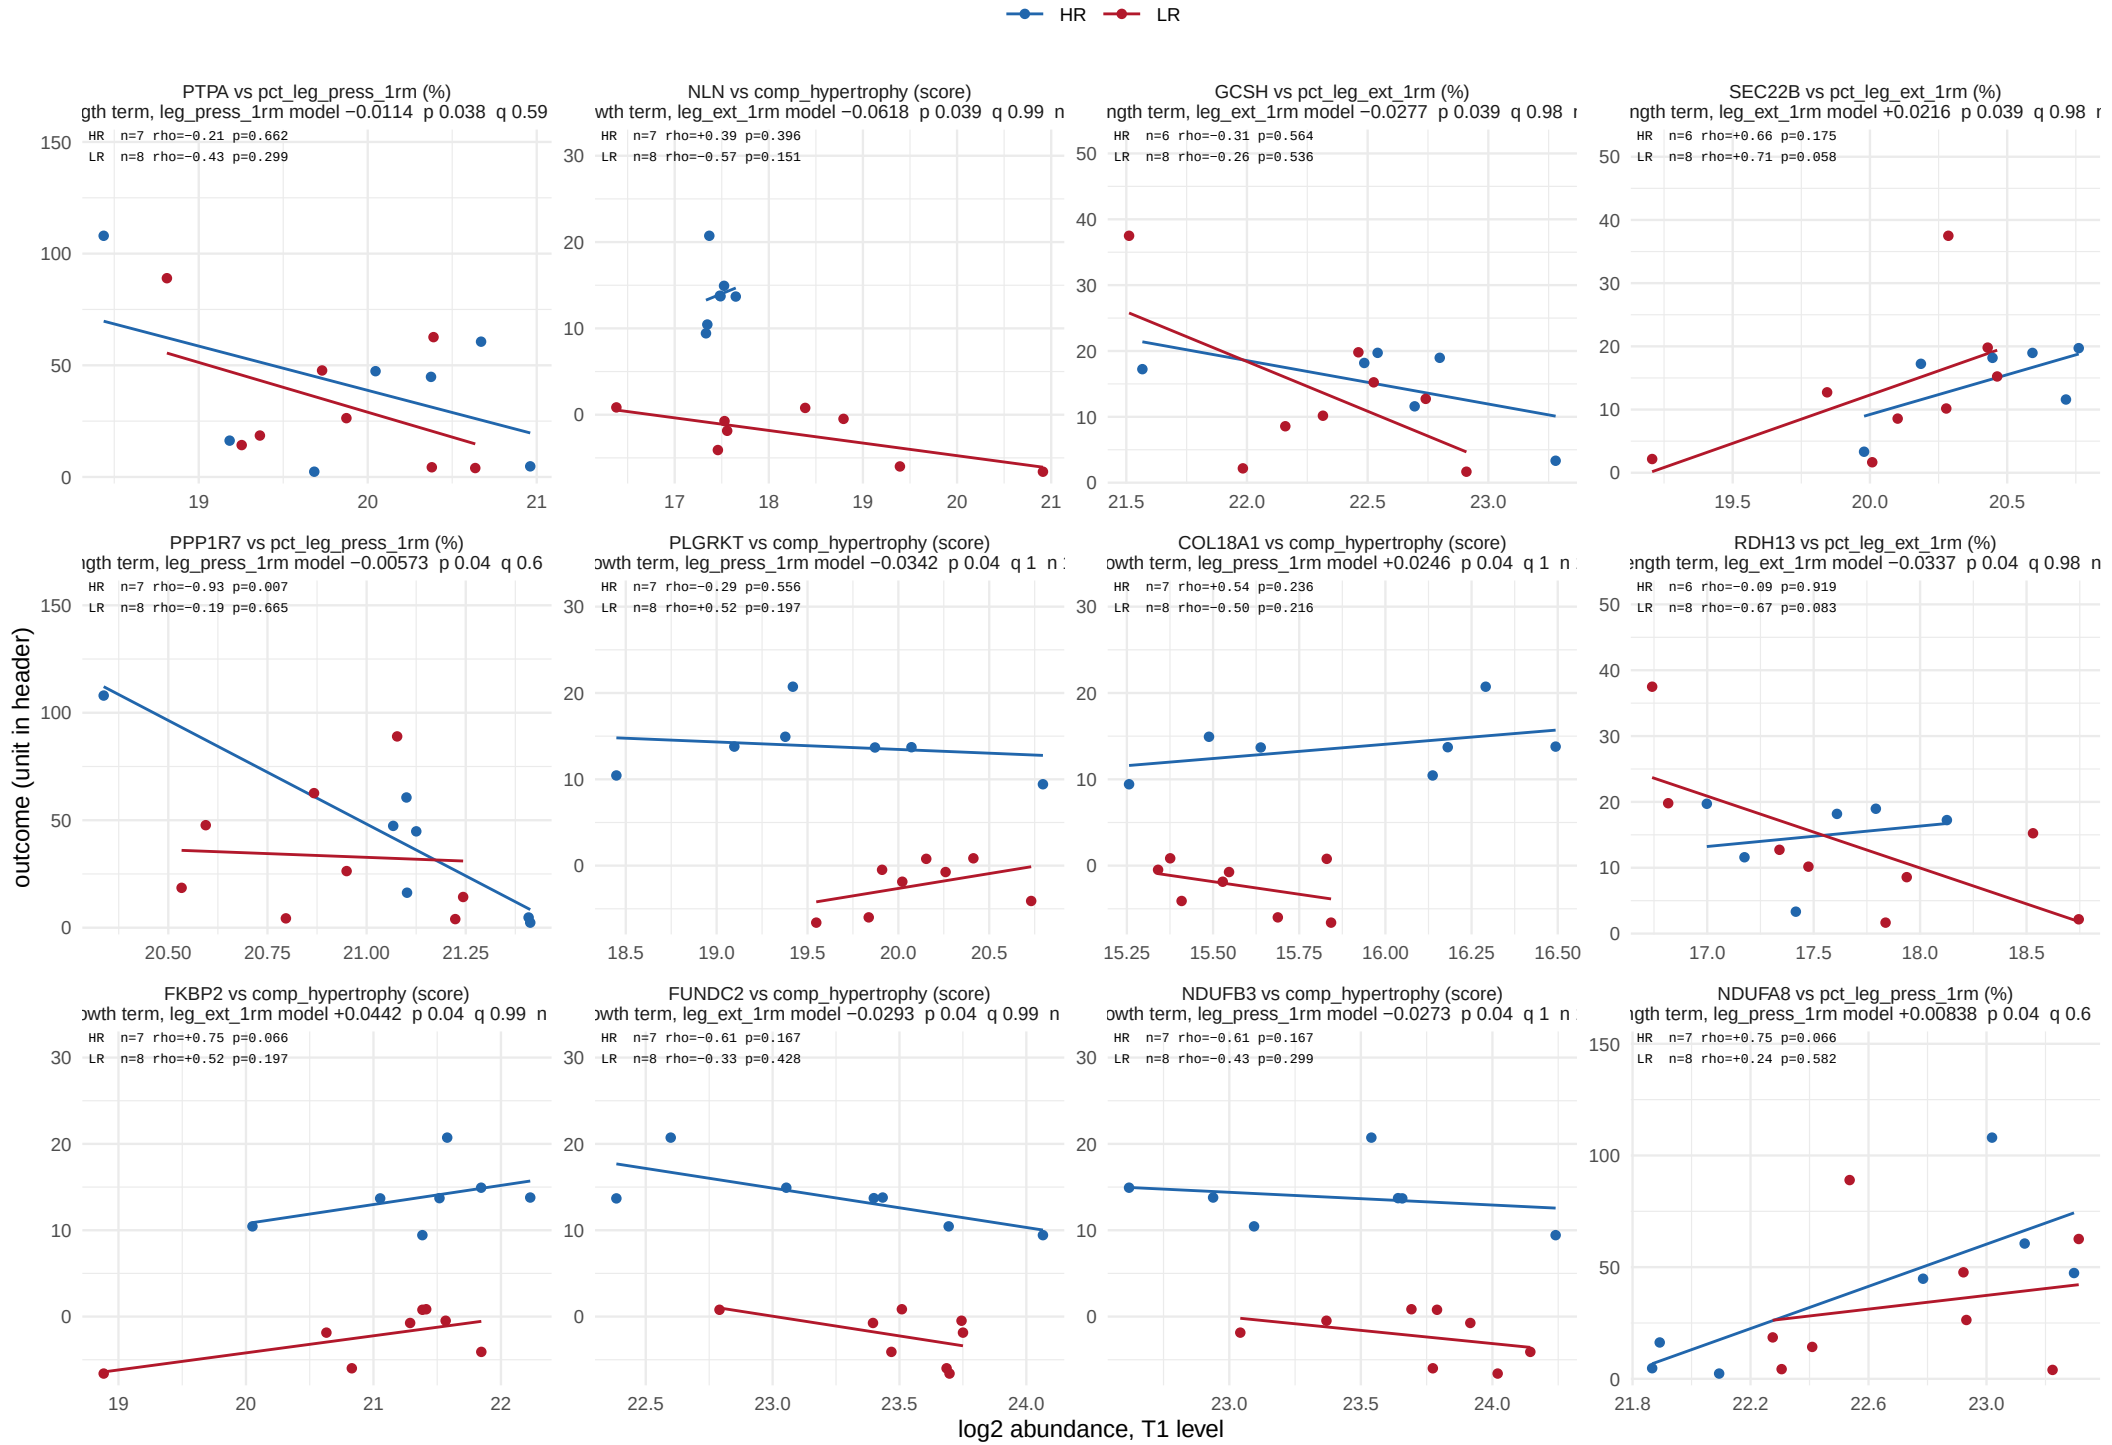

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, baseline window


387 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 28 of 33.

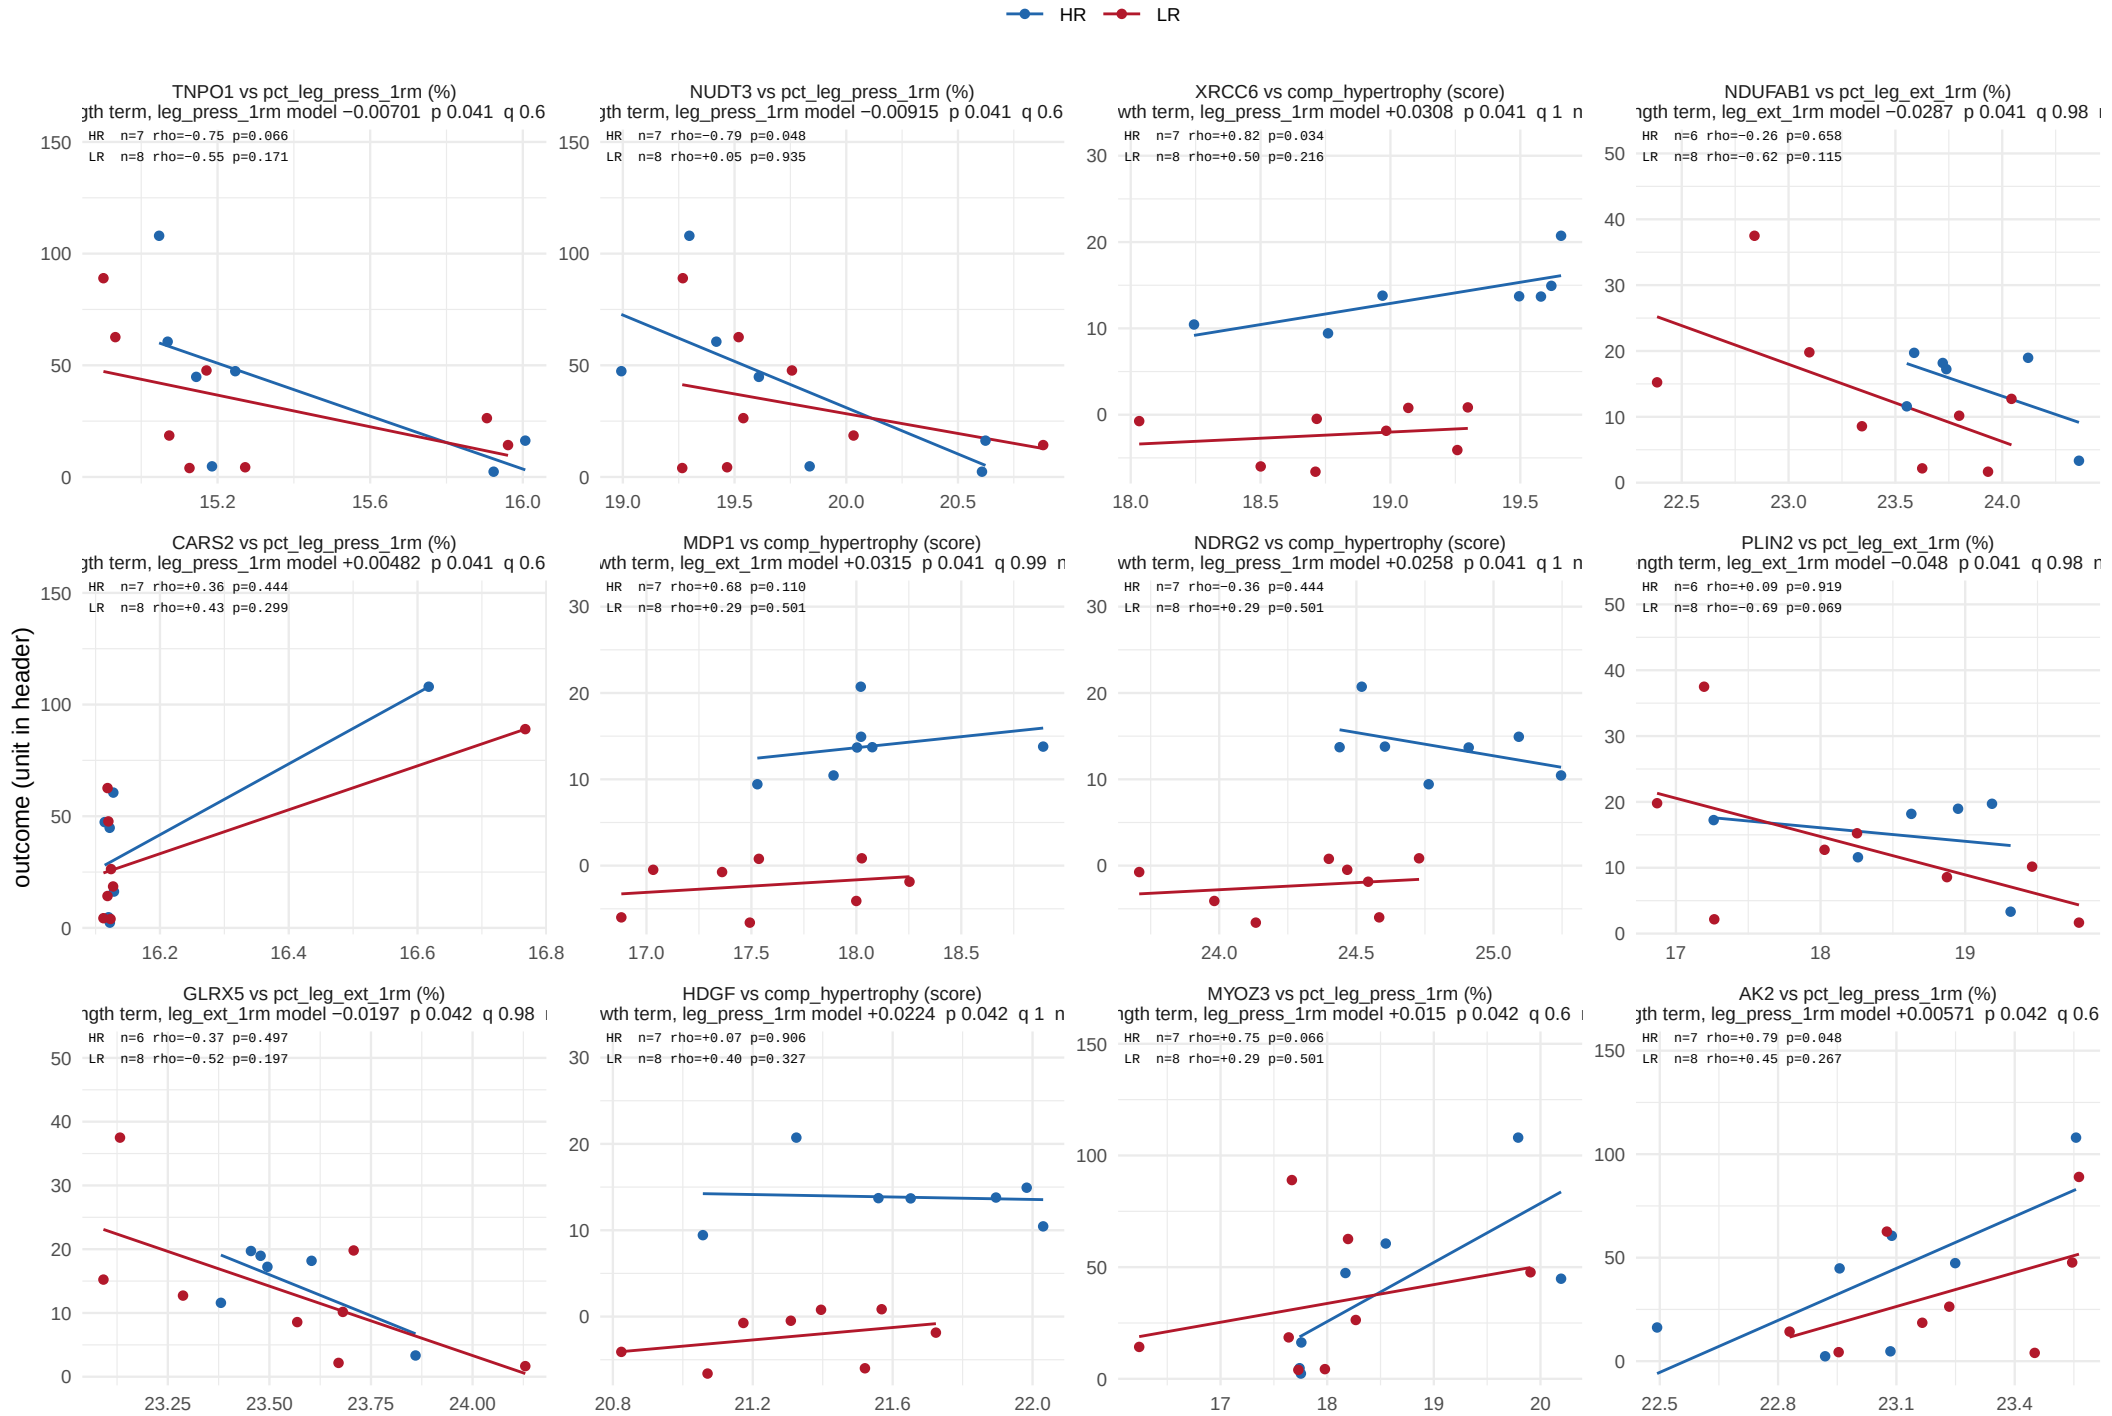

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, baseline window


387 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 29 of 33.

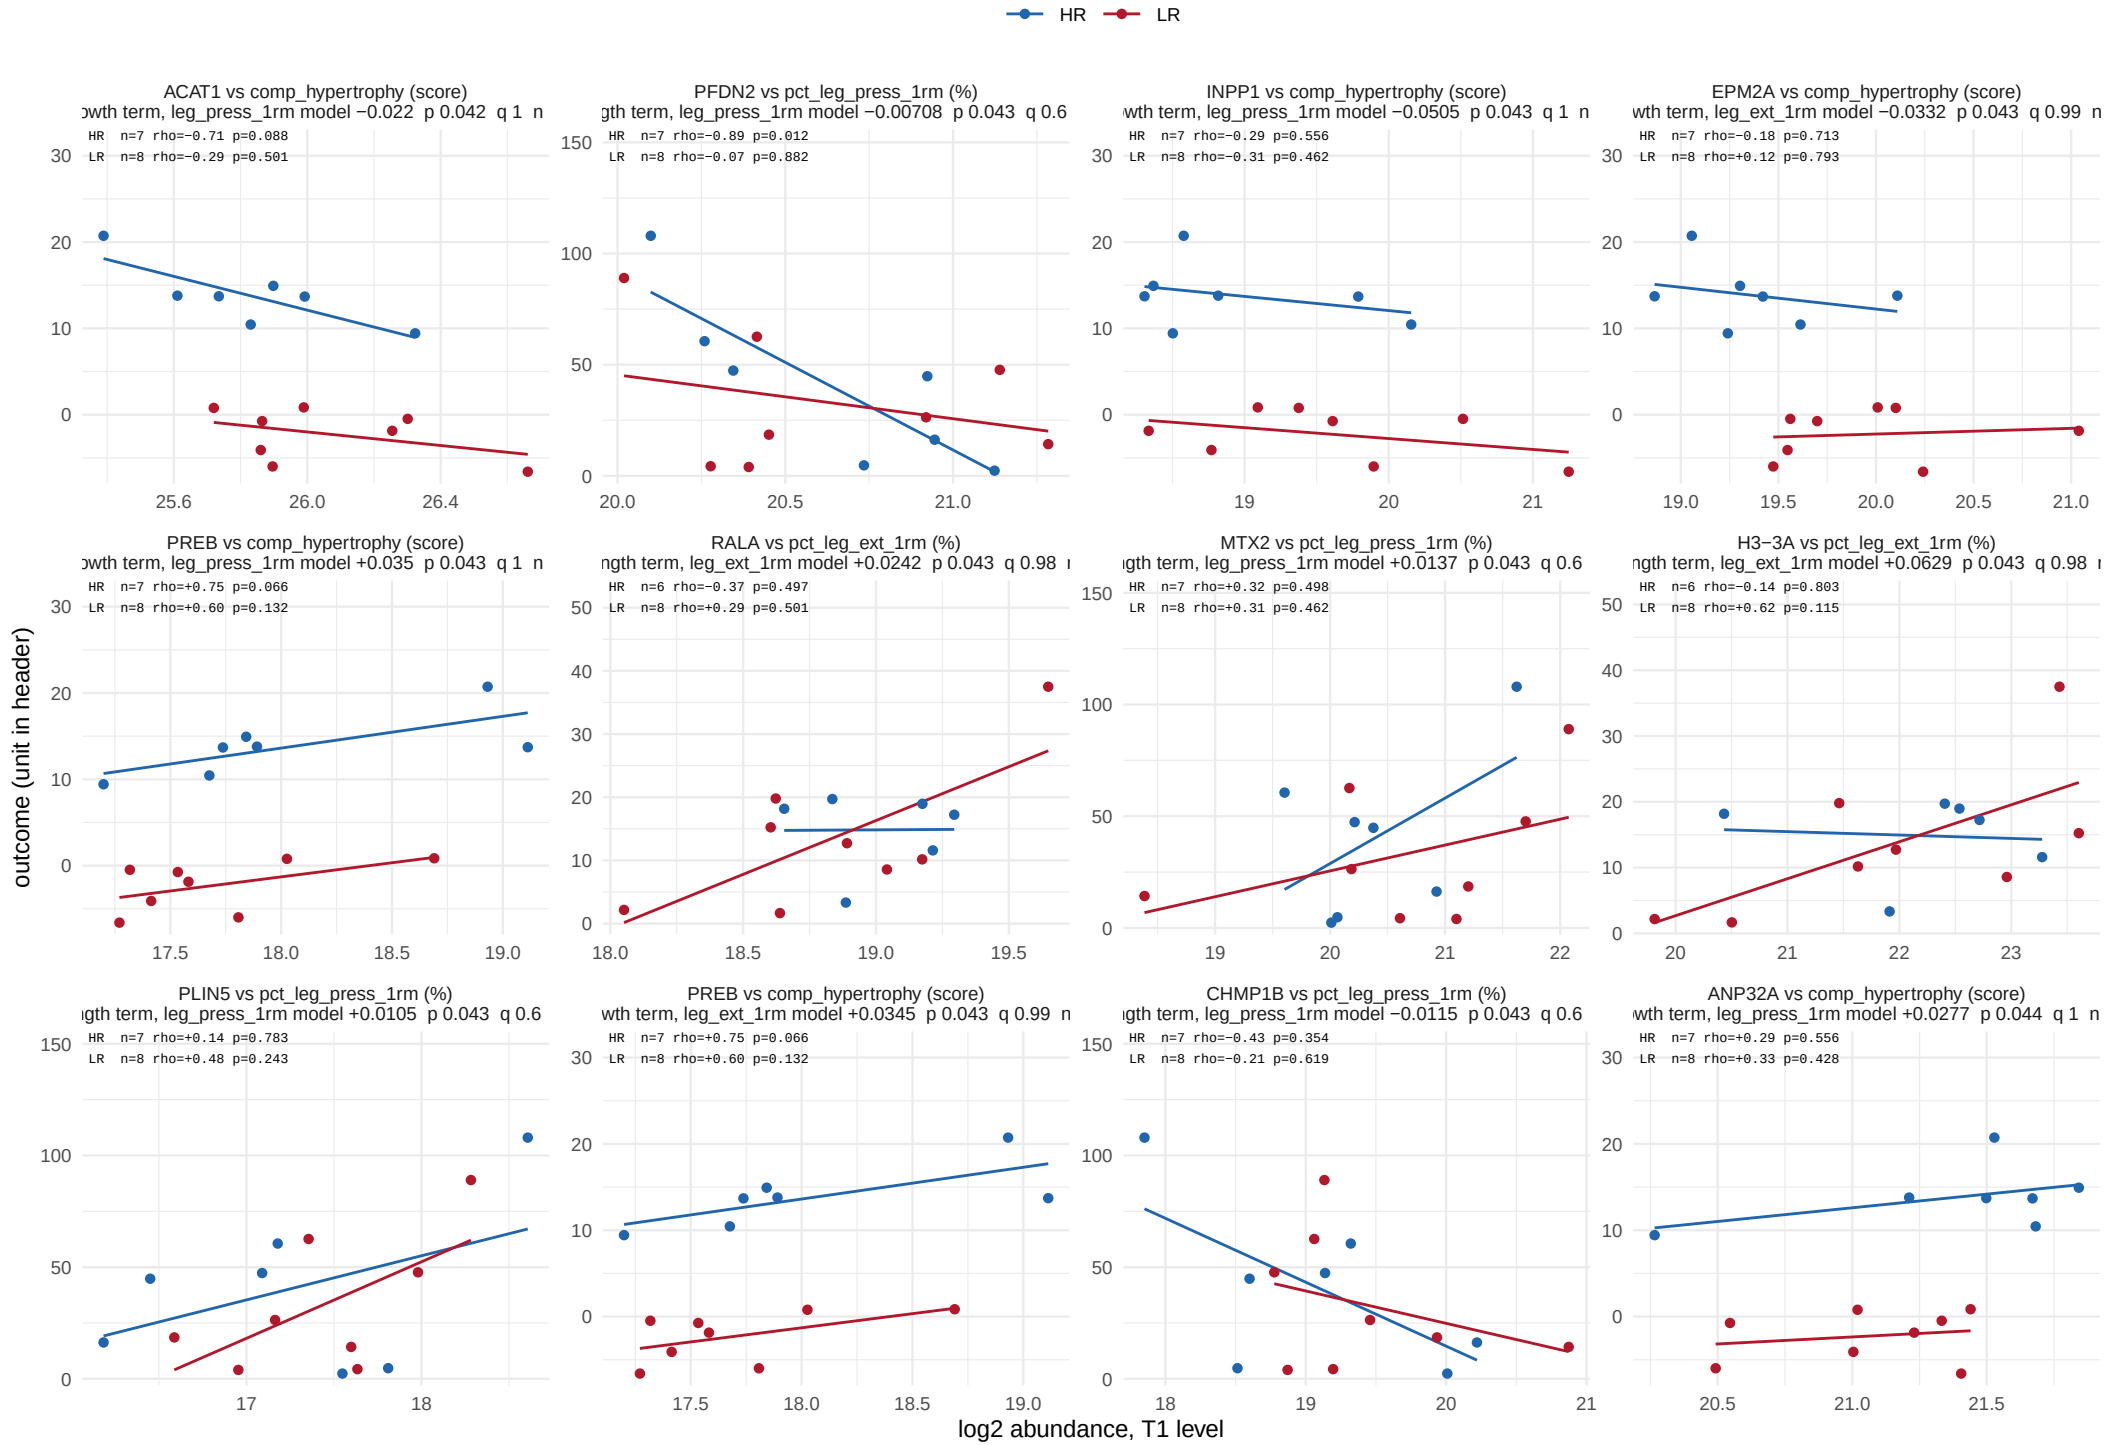

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, baseline window


387 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 30 of 33.

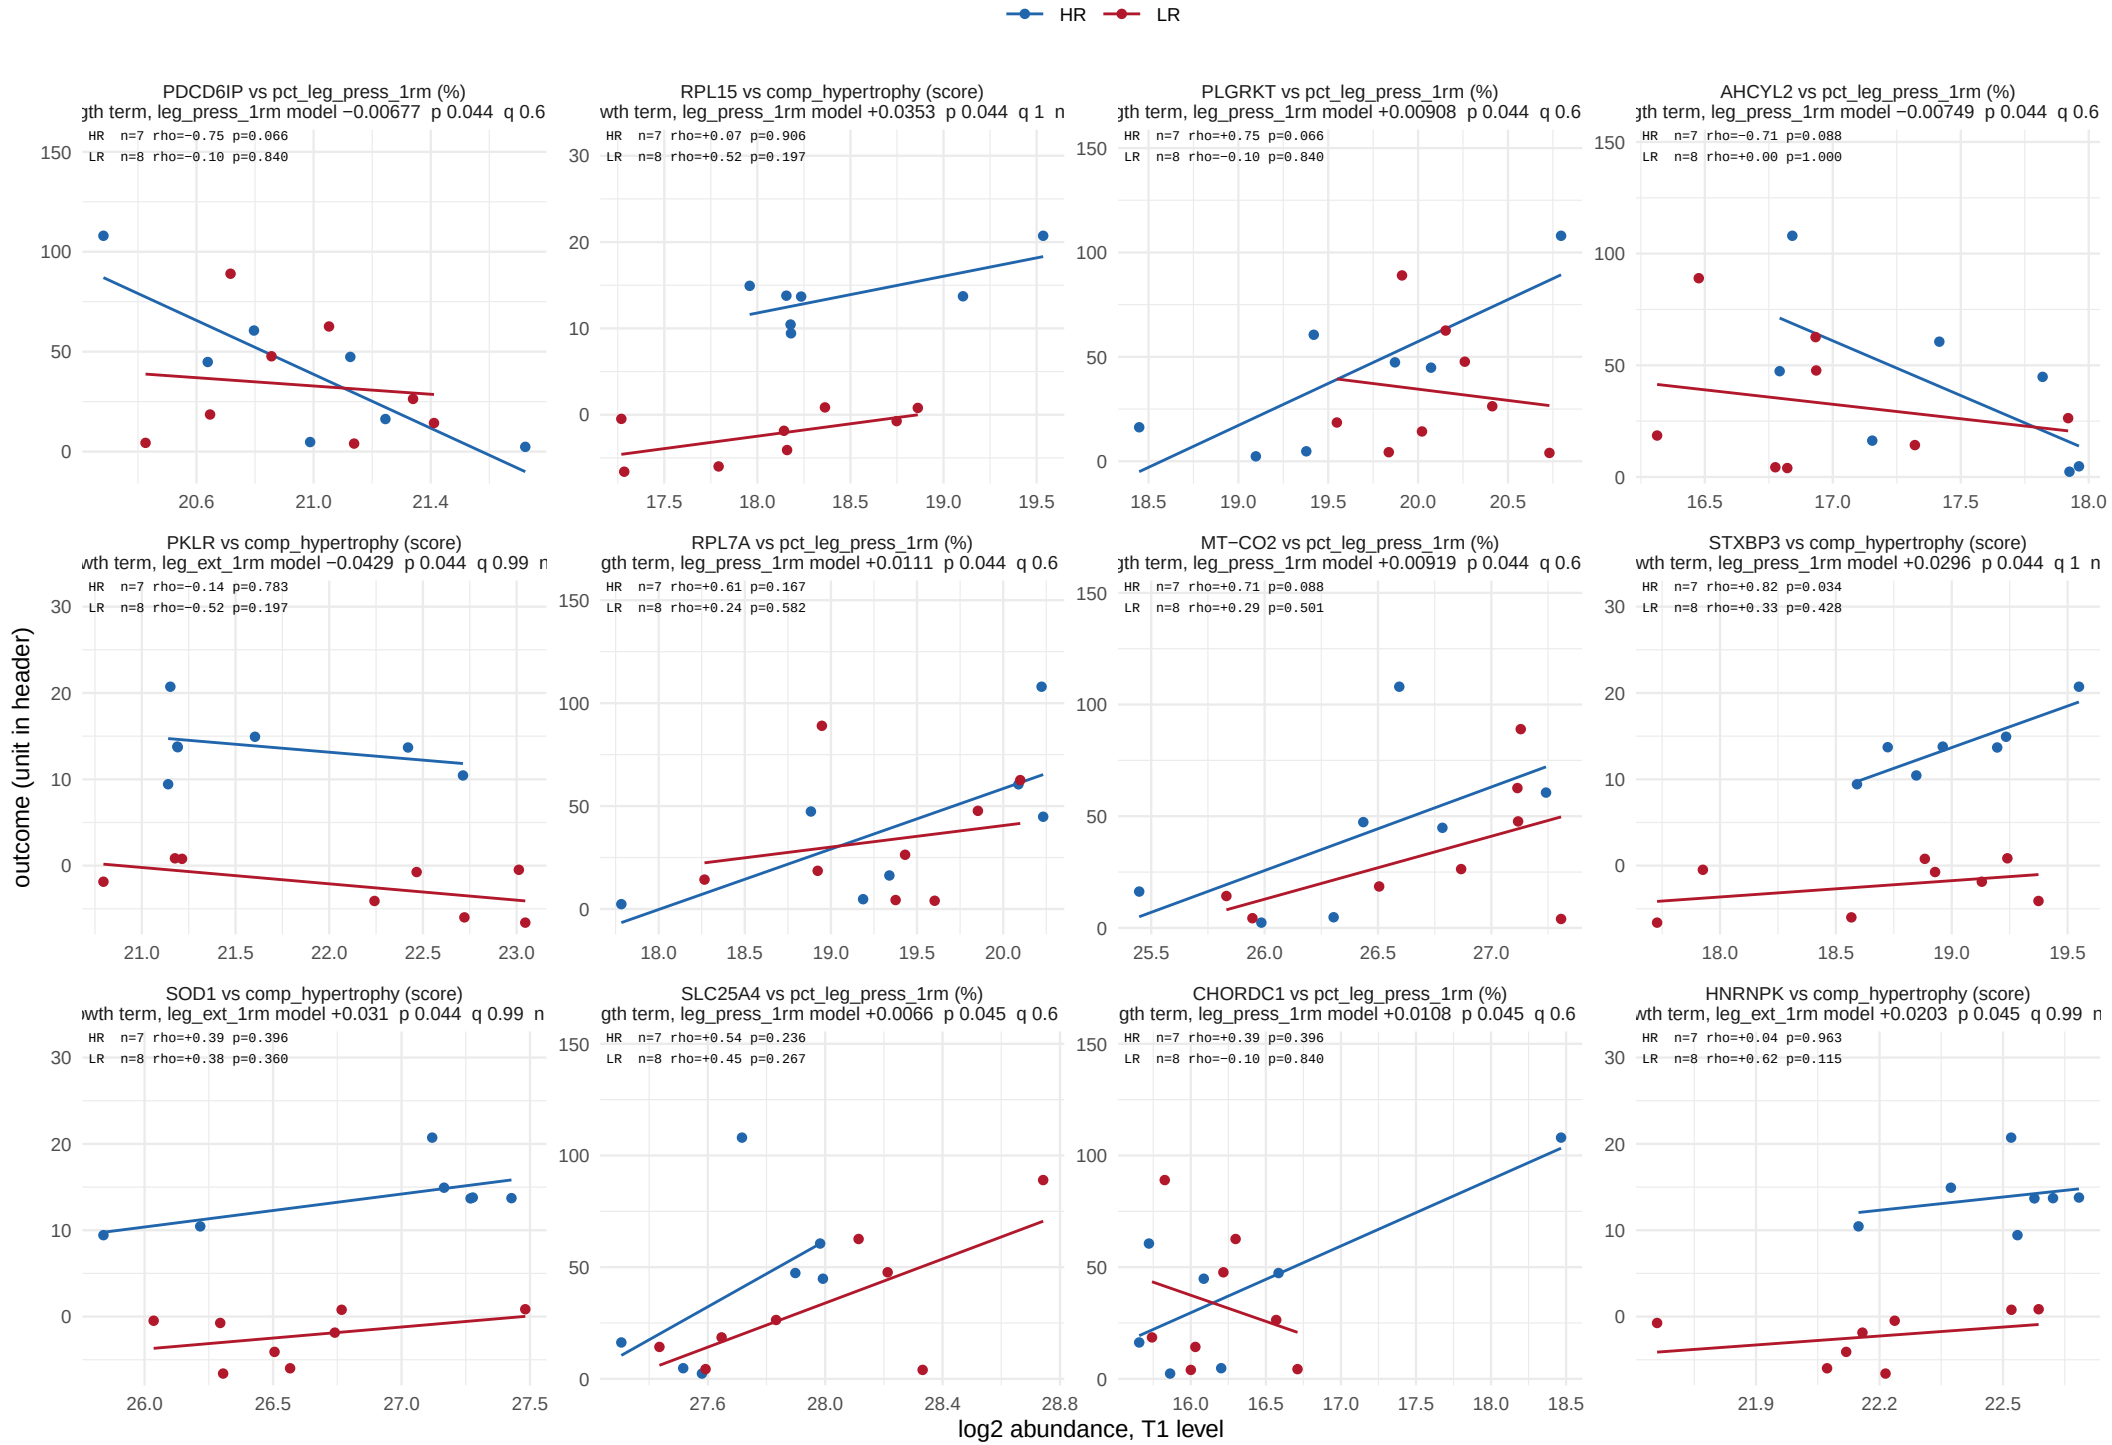

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, baseline window


387 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 31 of 33.

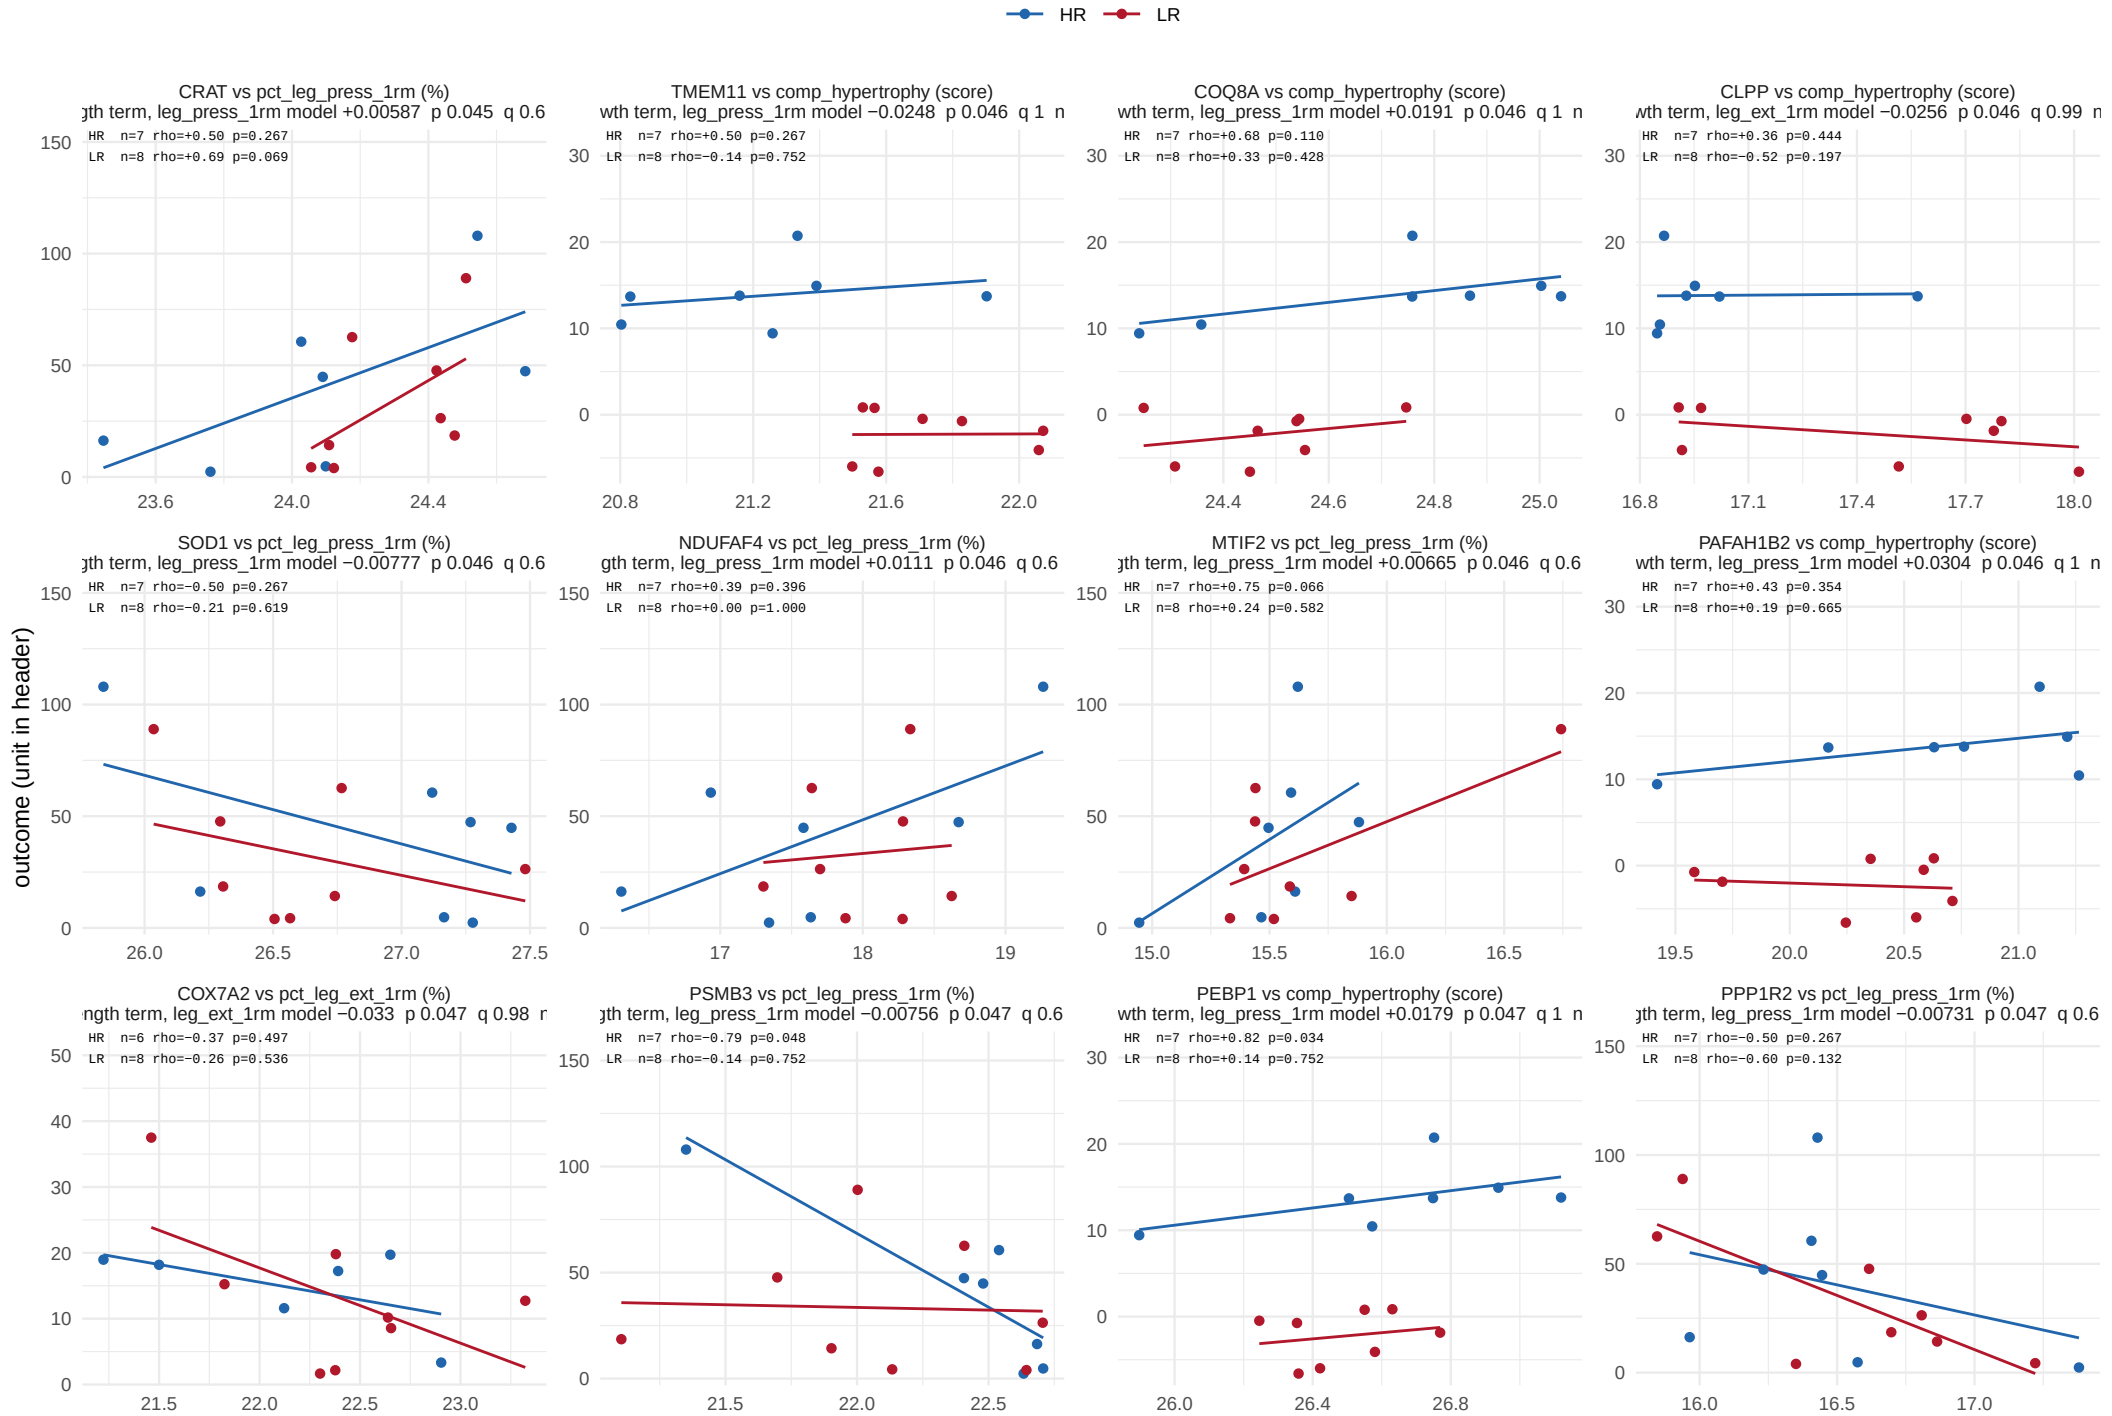

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, baseline window


387 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 32 of 33.

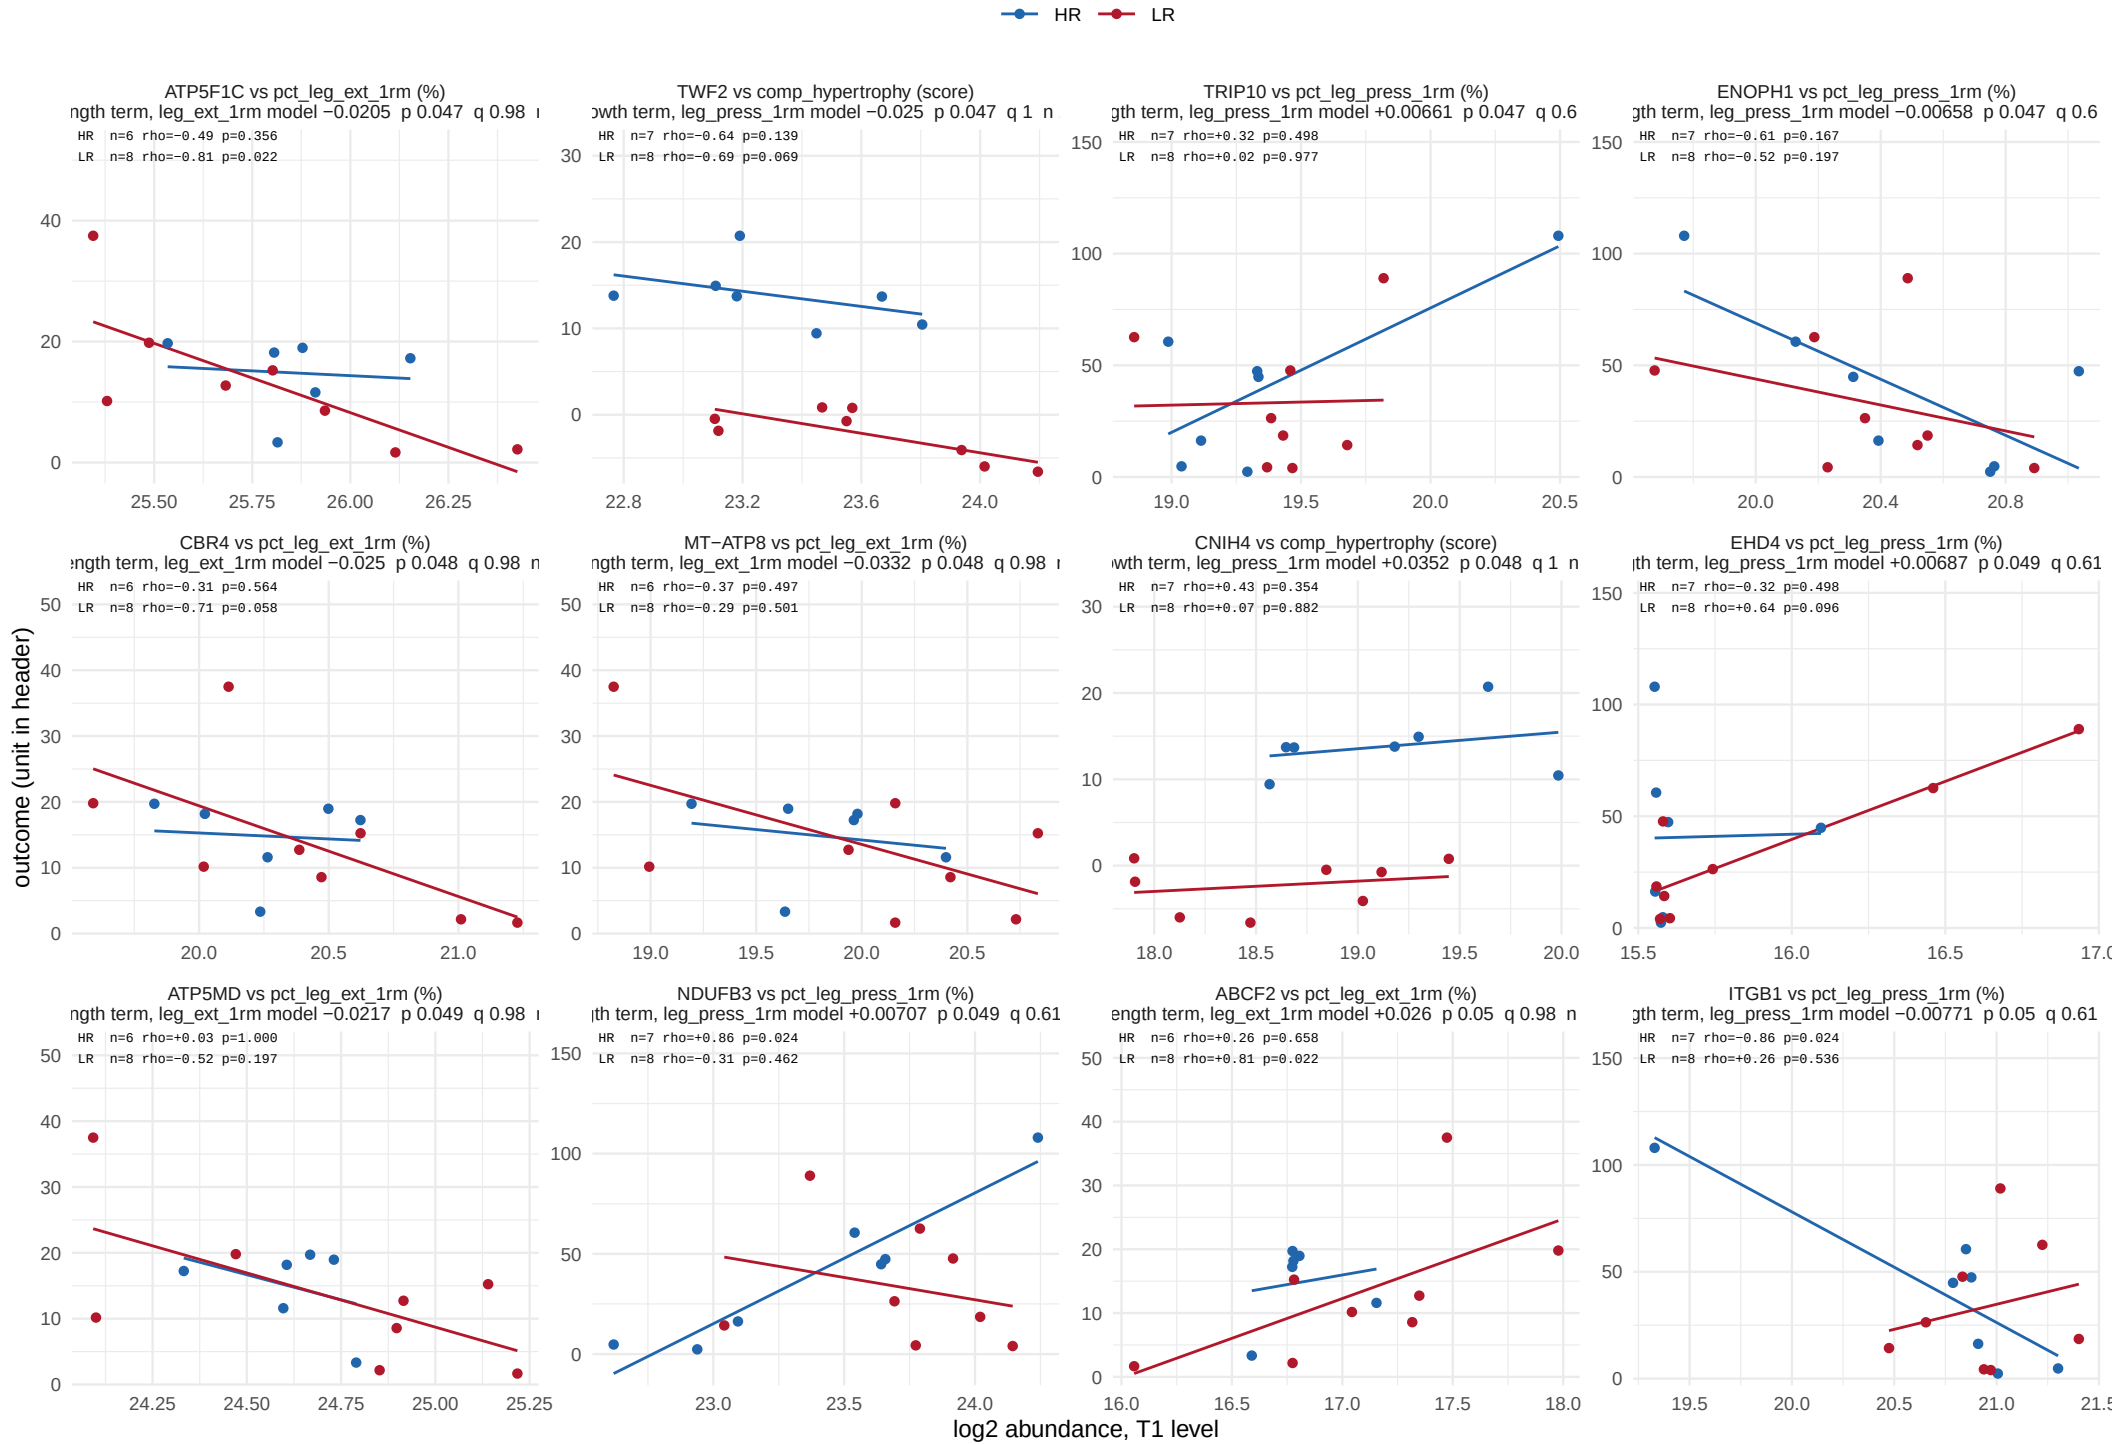

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, baseline window


387 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 33 of 33.

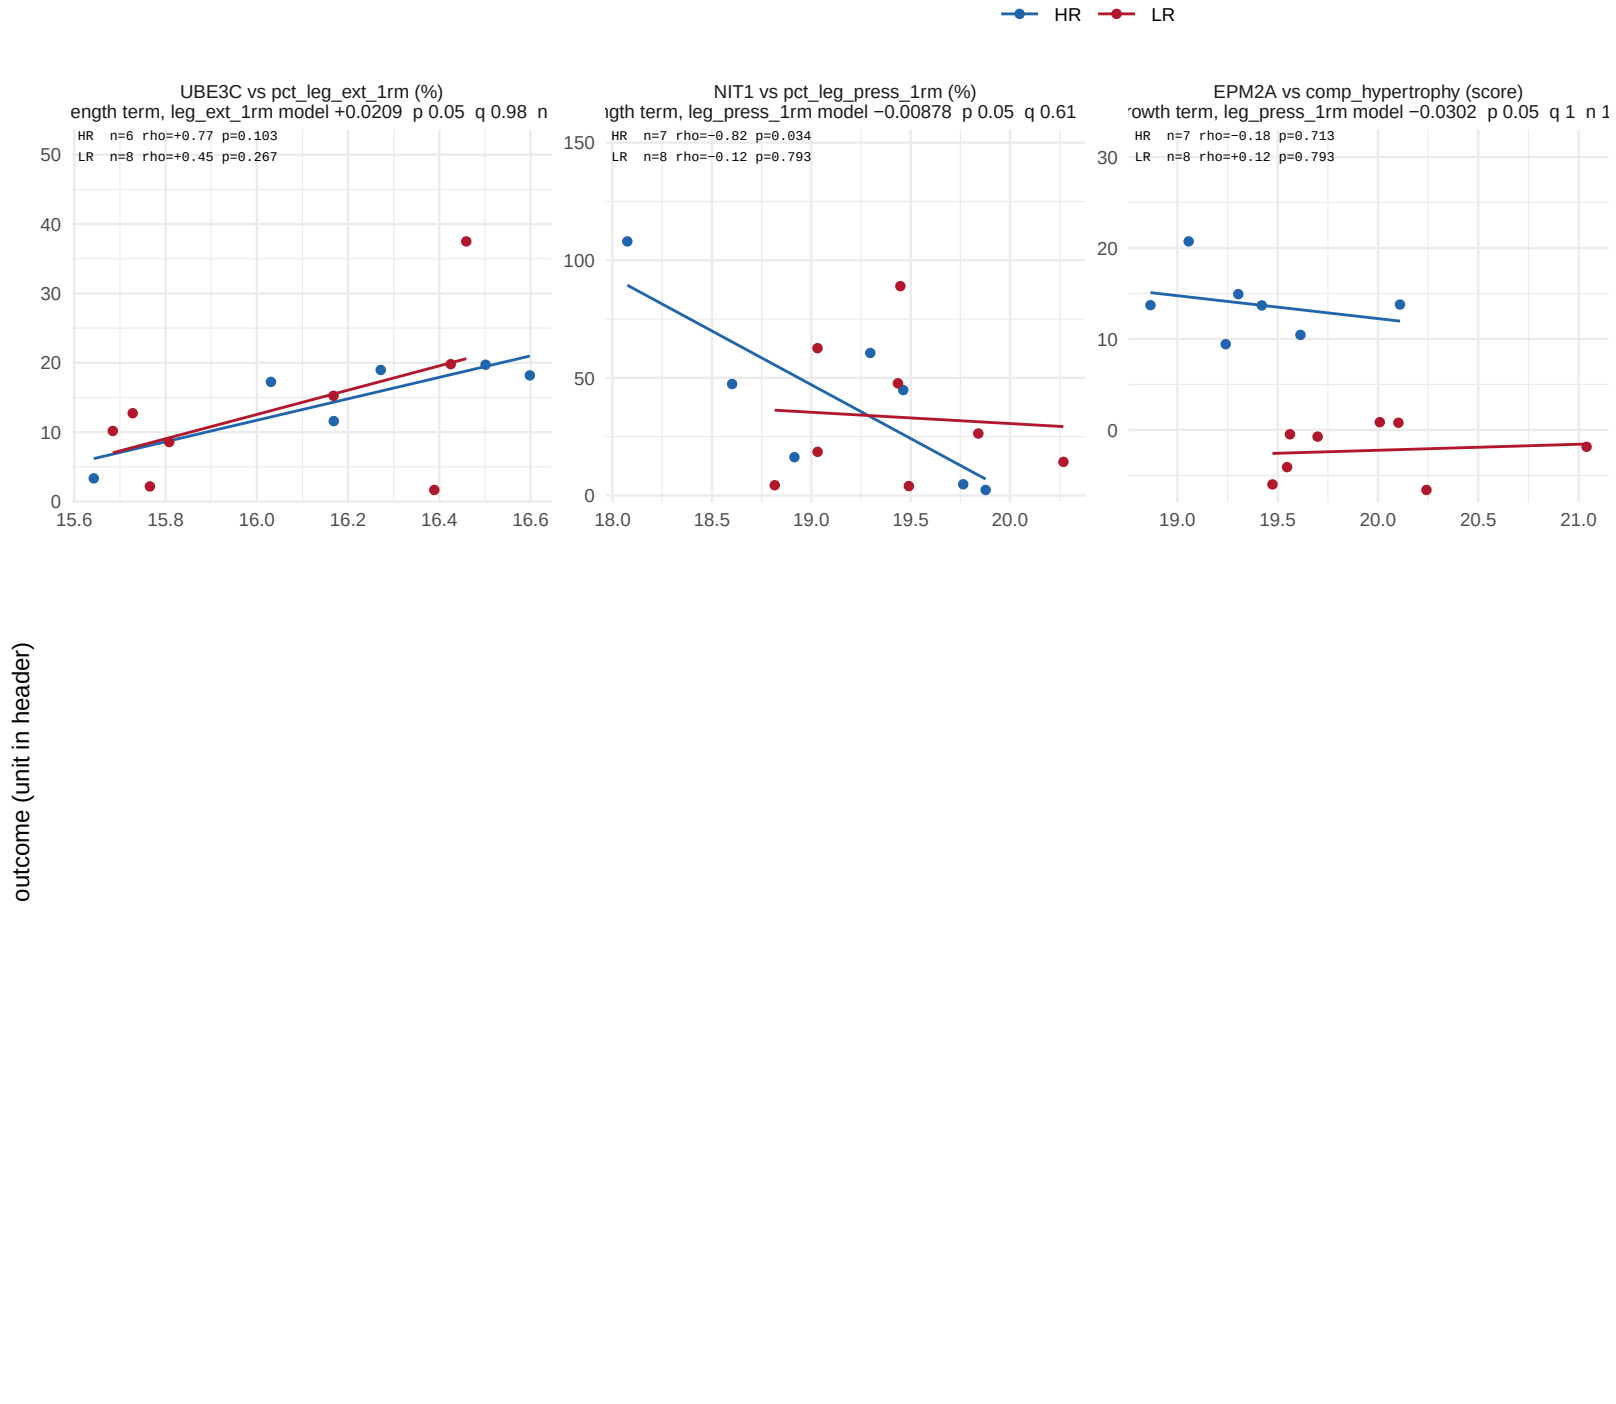

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, acute window


420 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 1 of 35.

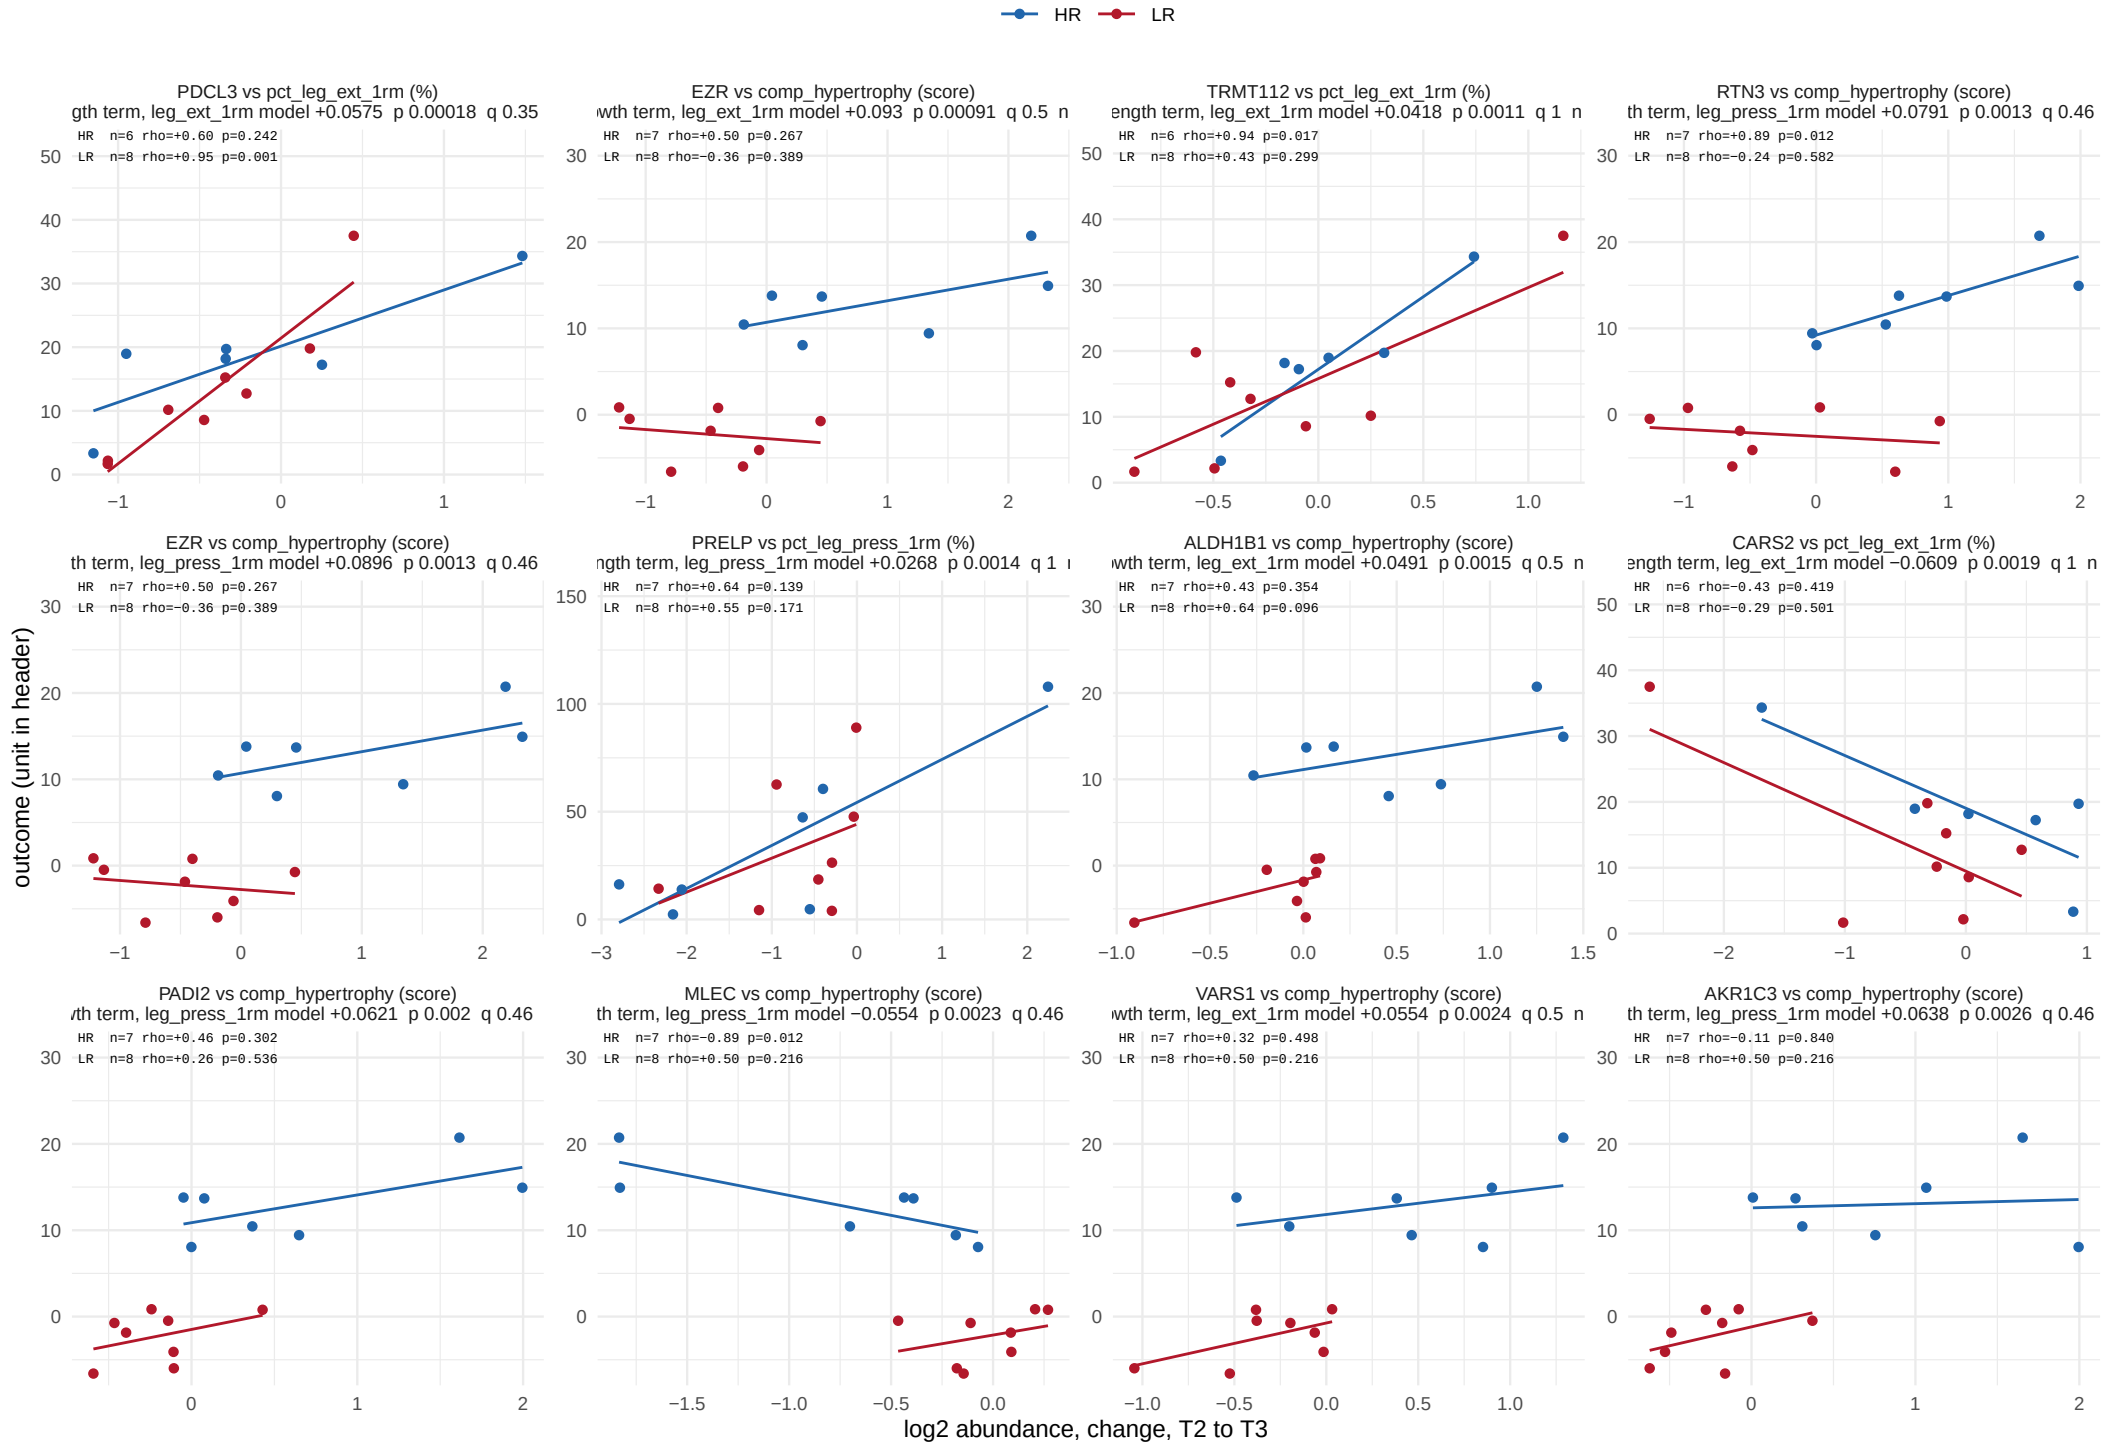

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, acute window


420 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 2 of 35.

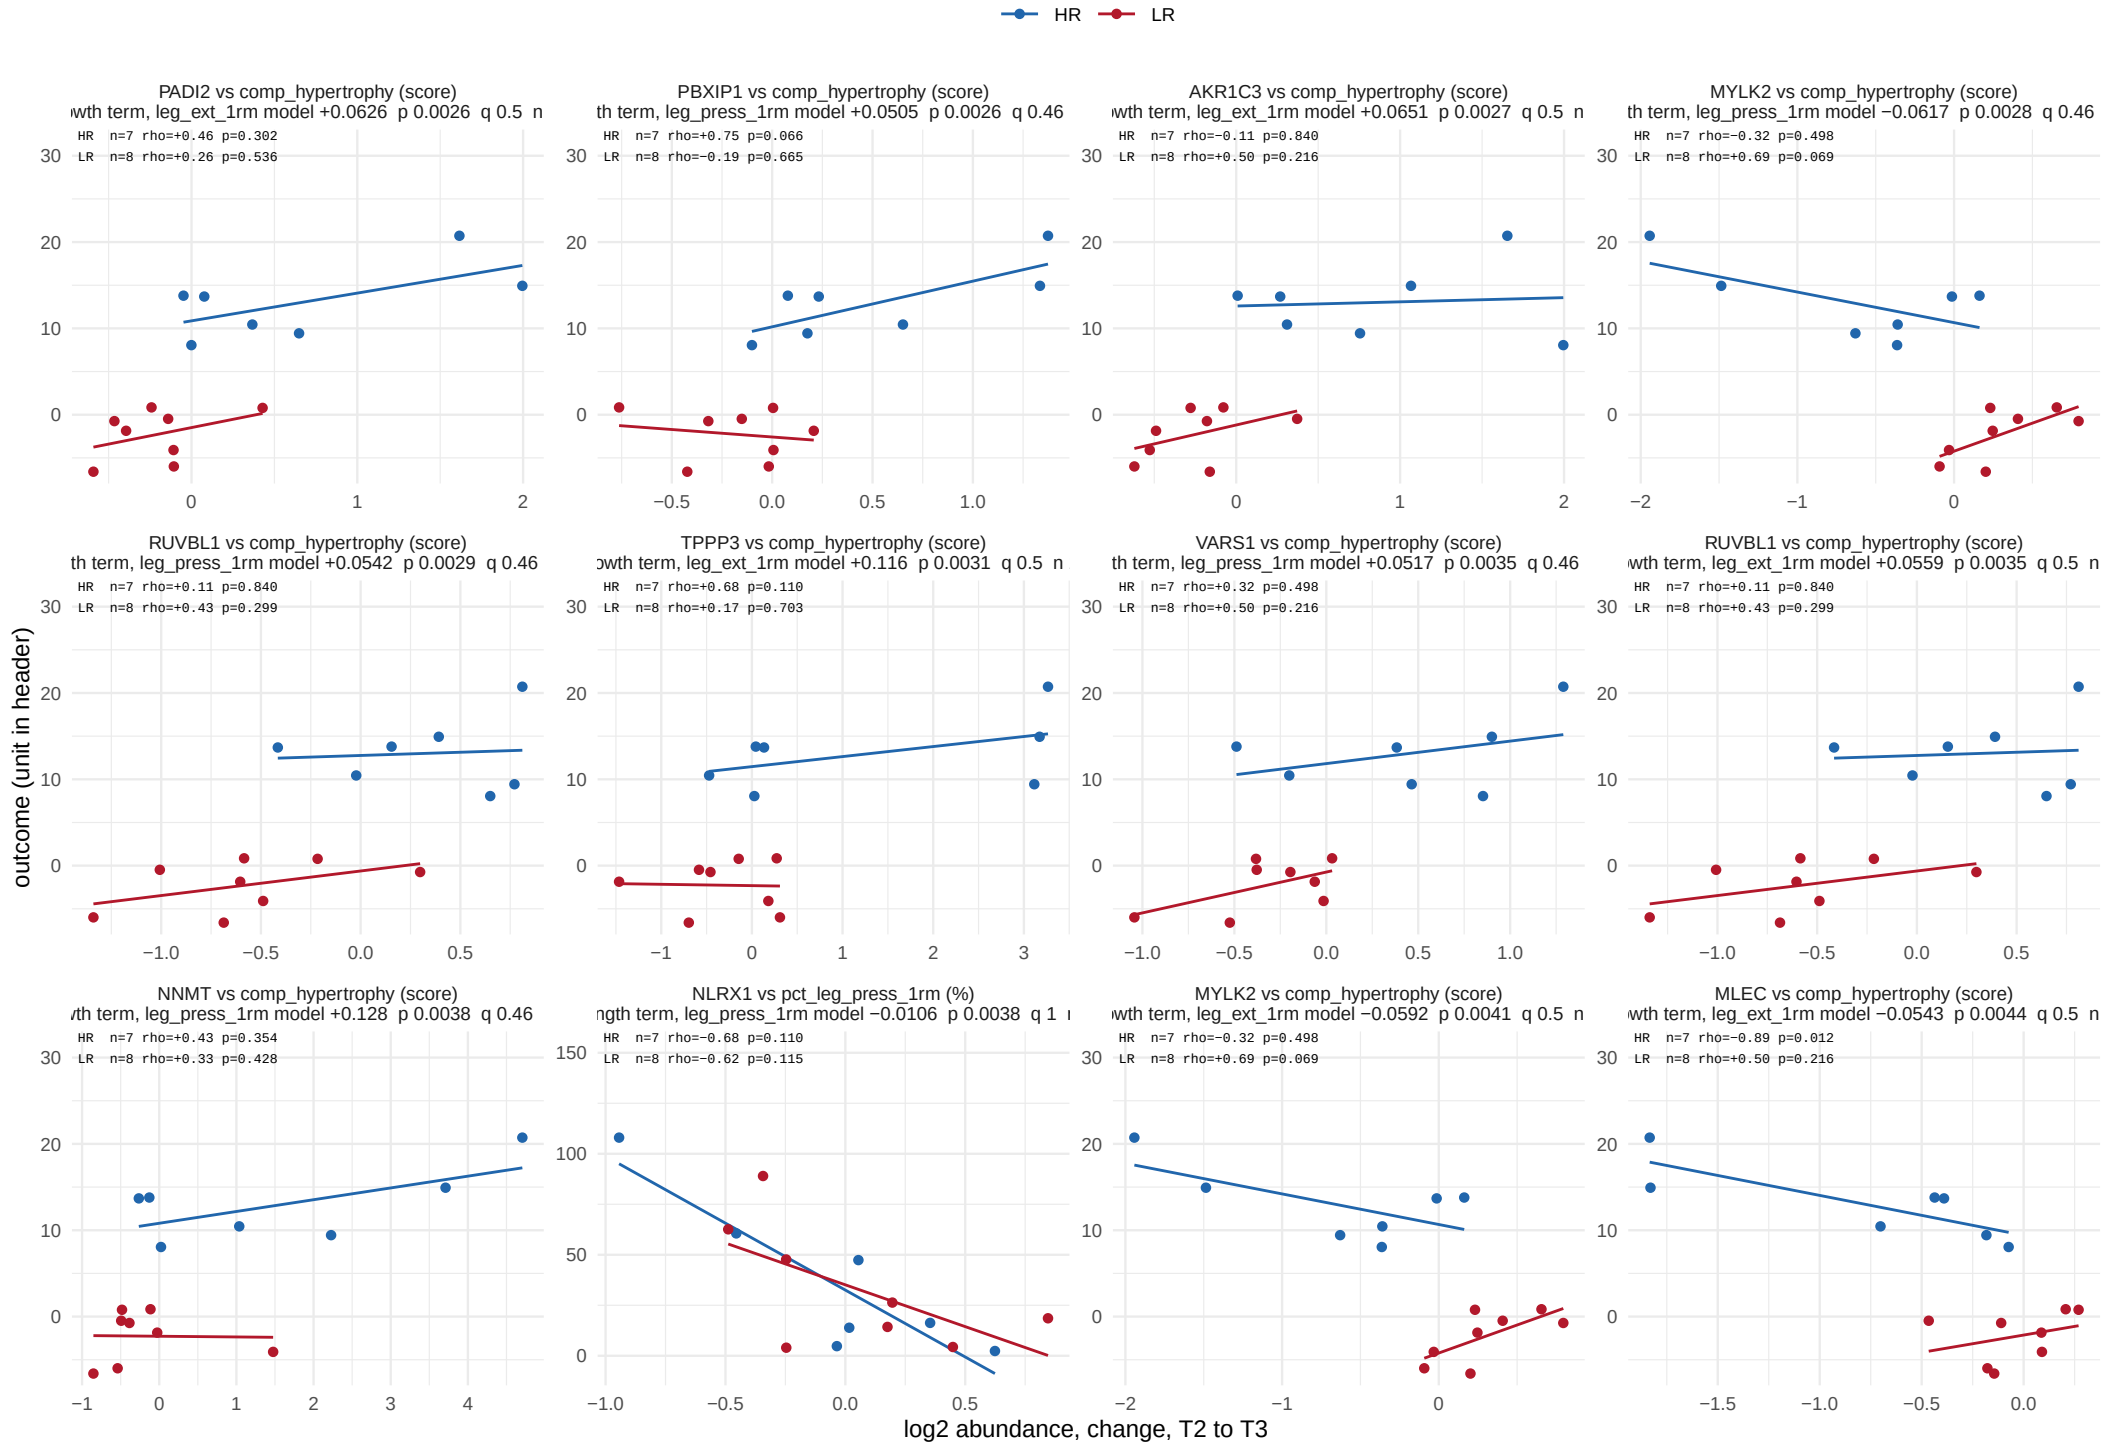

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, acute window


420 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 3 of 35.

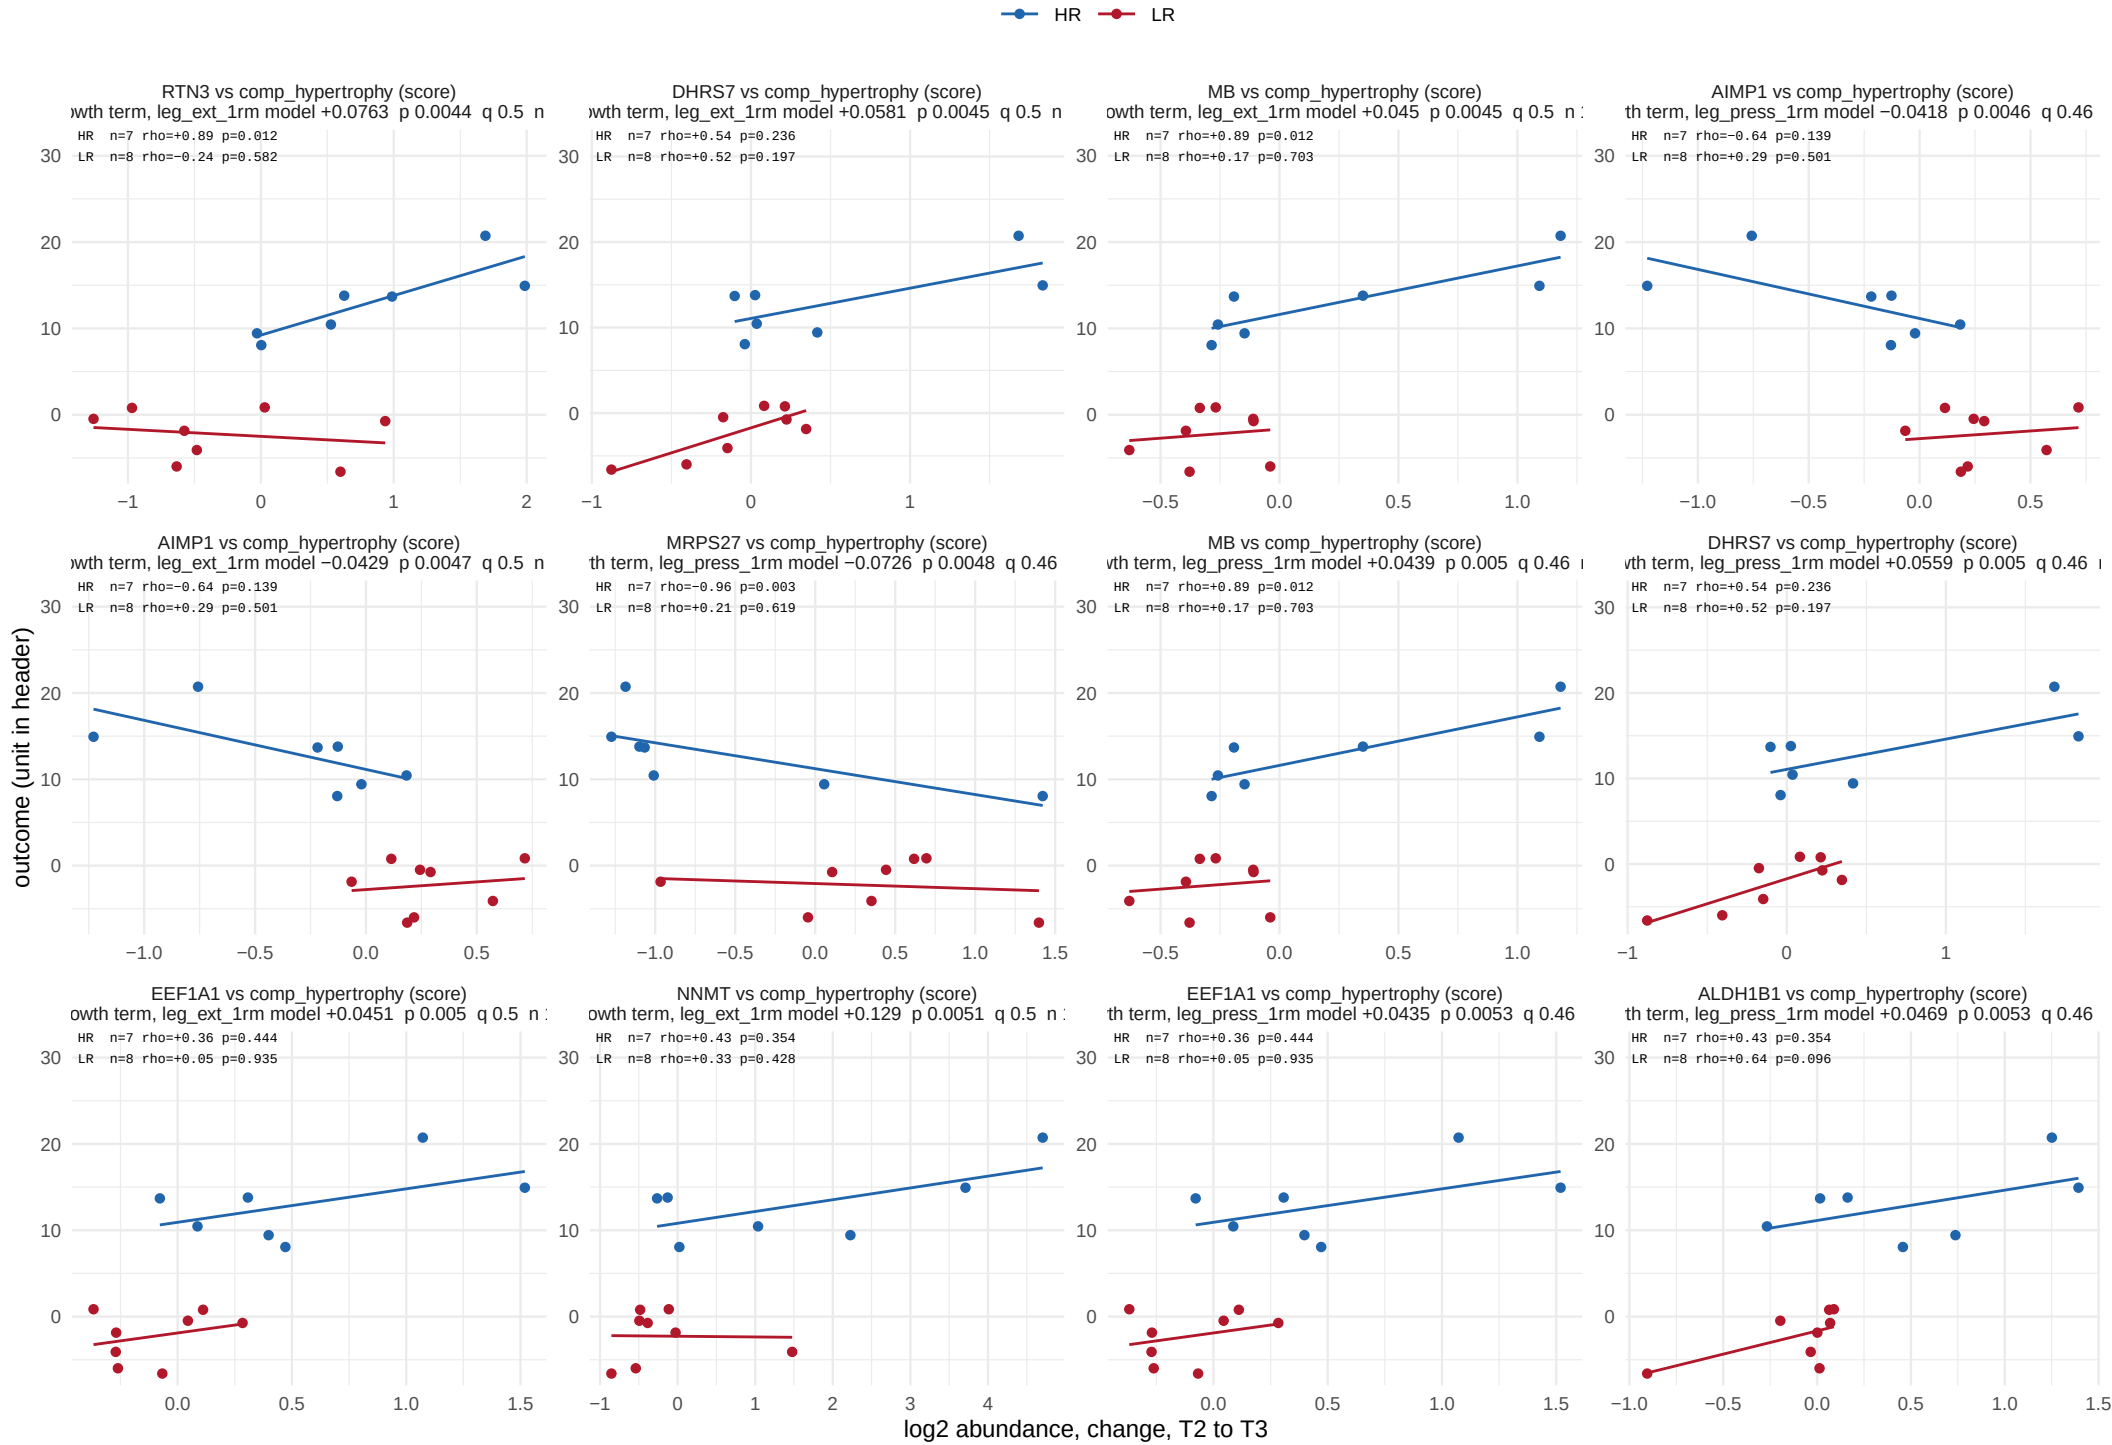

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, acute window


420 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 4 of 35.

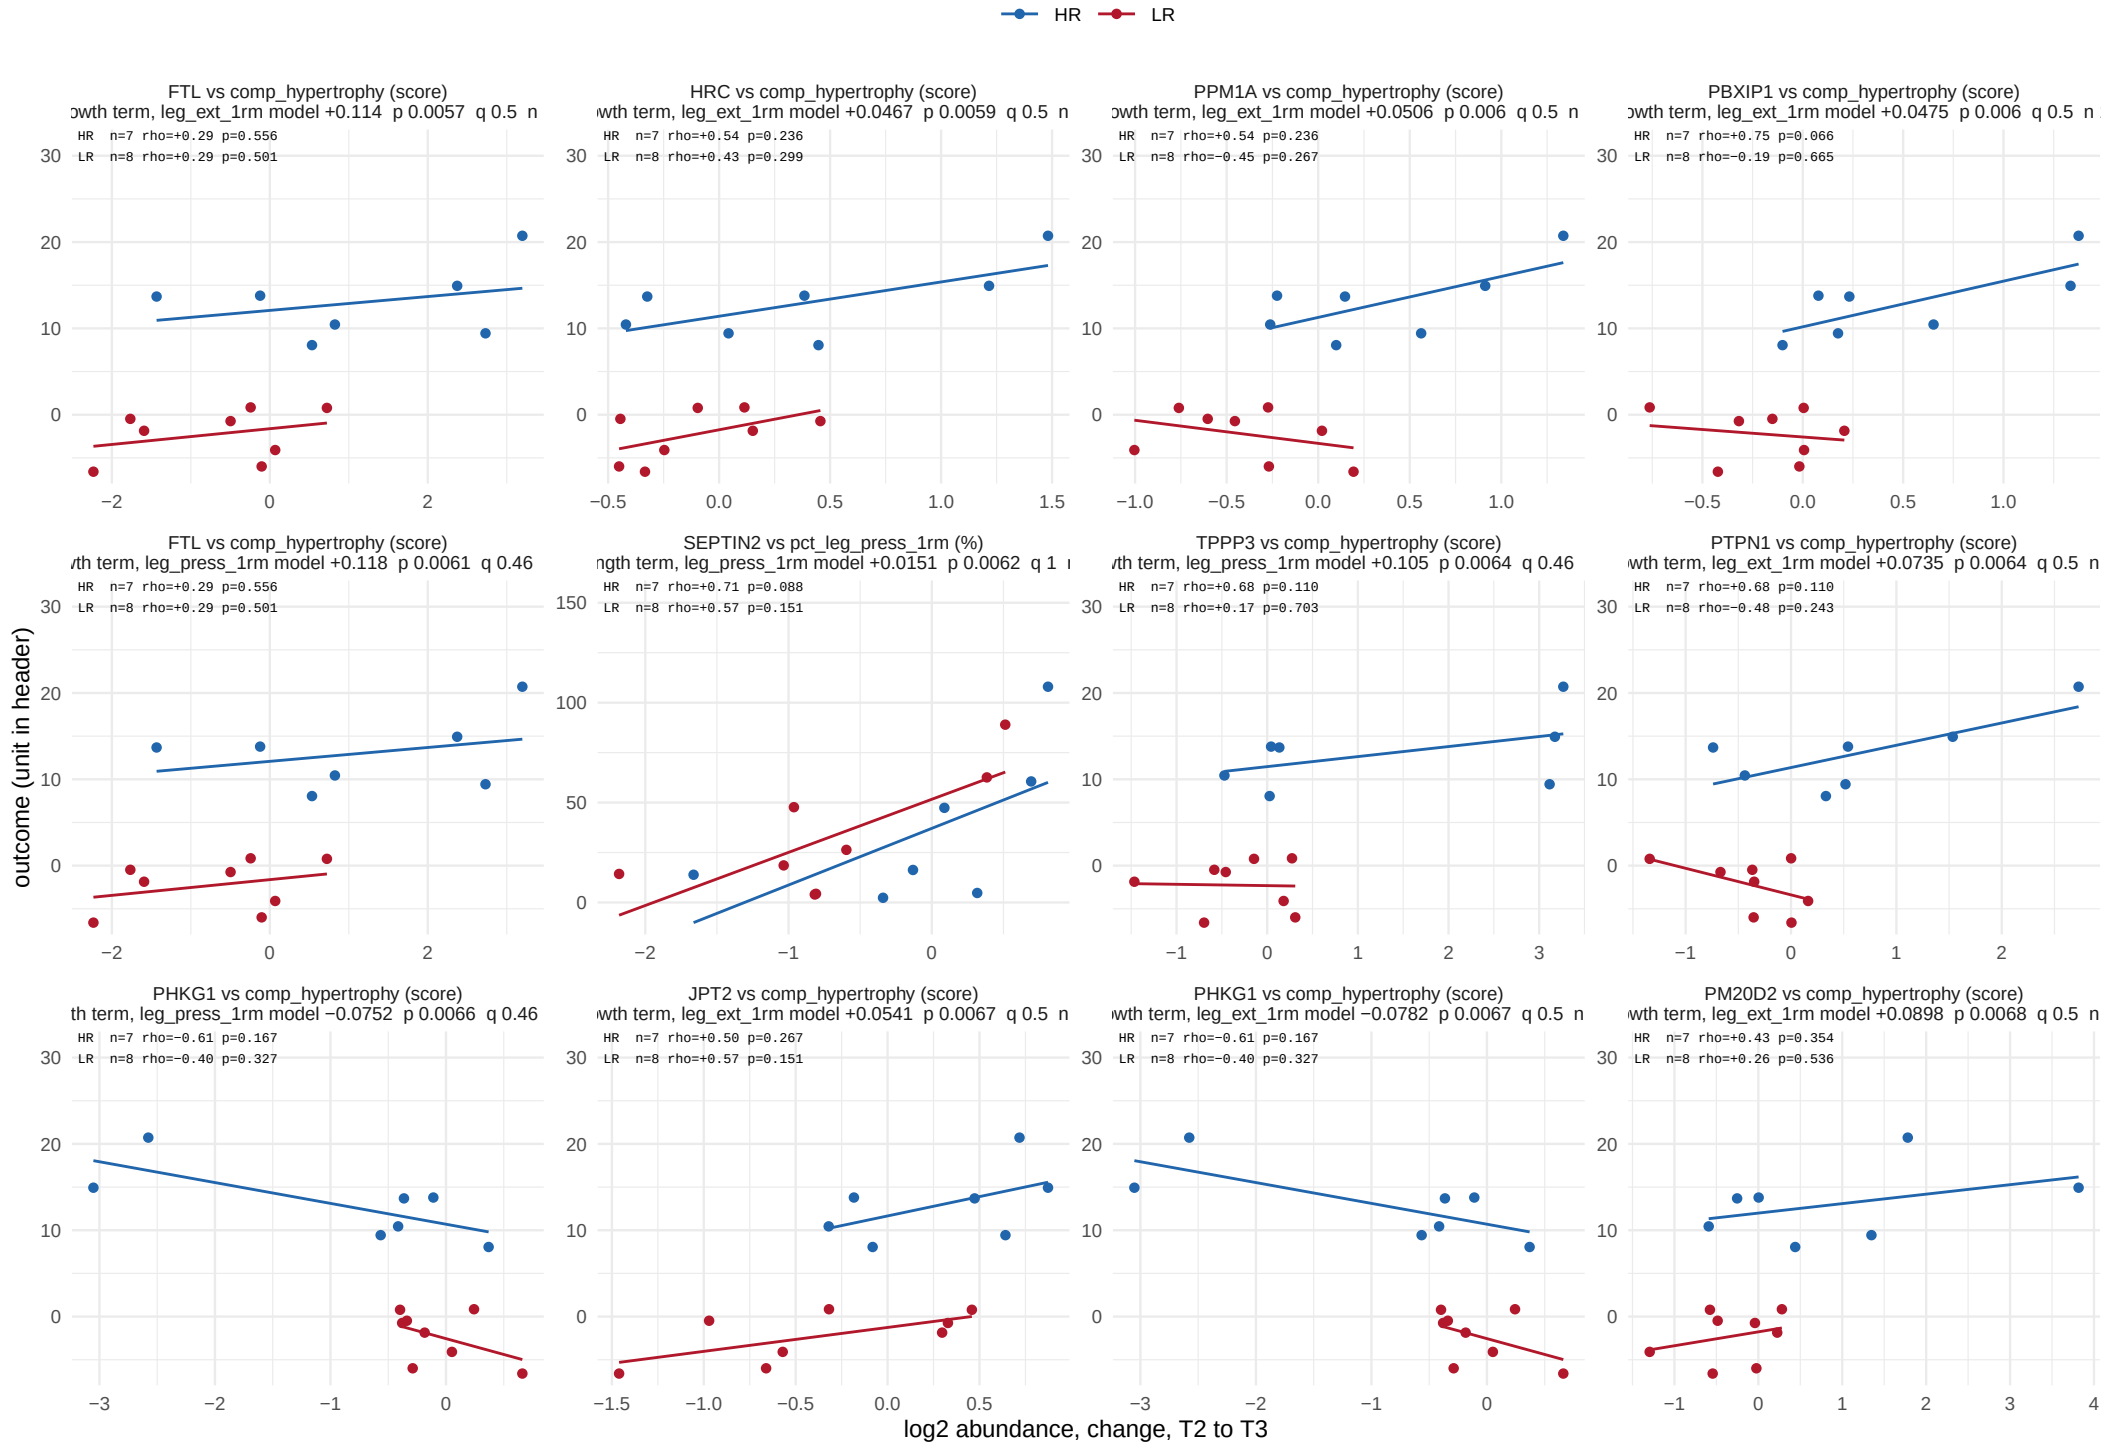

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, acute window


420 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 5 of 35.

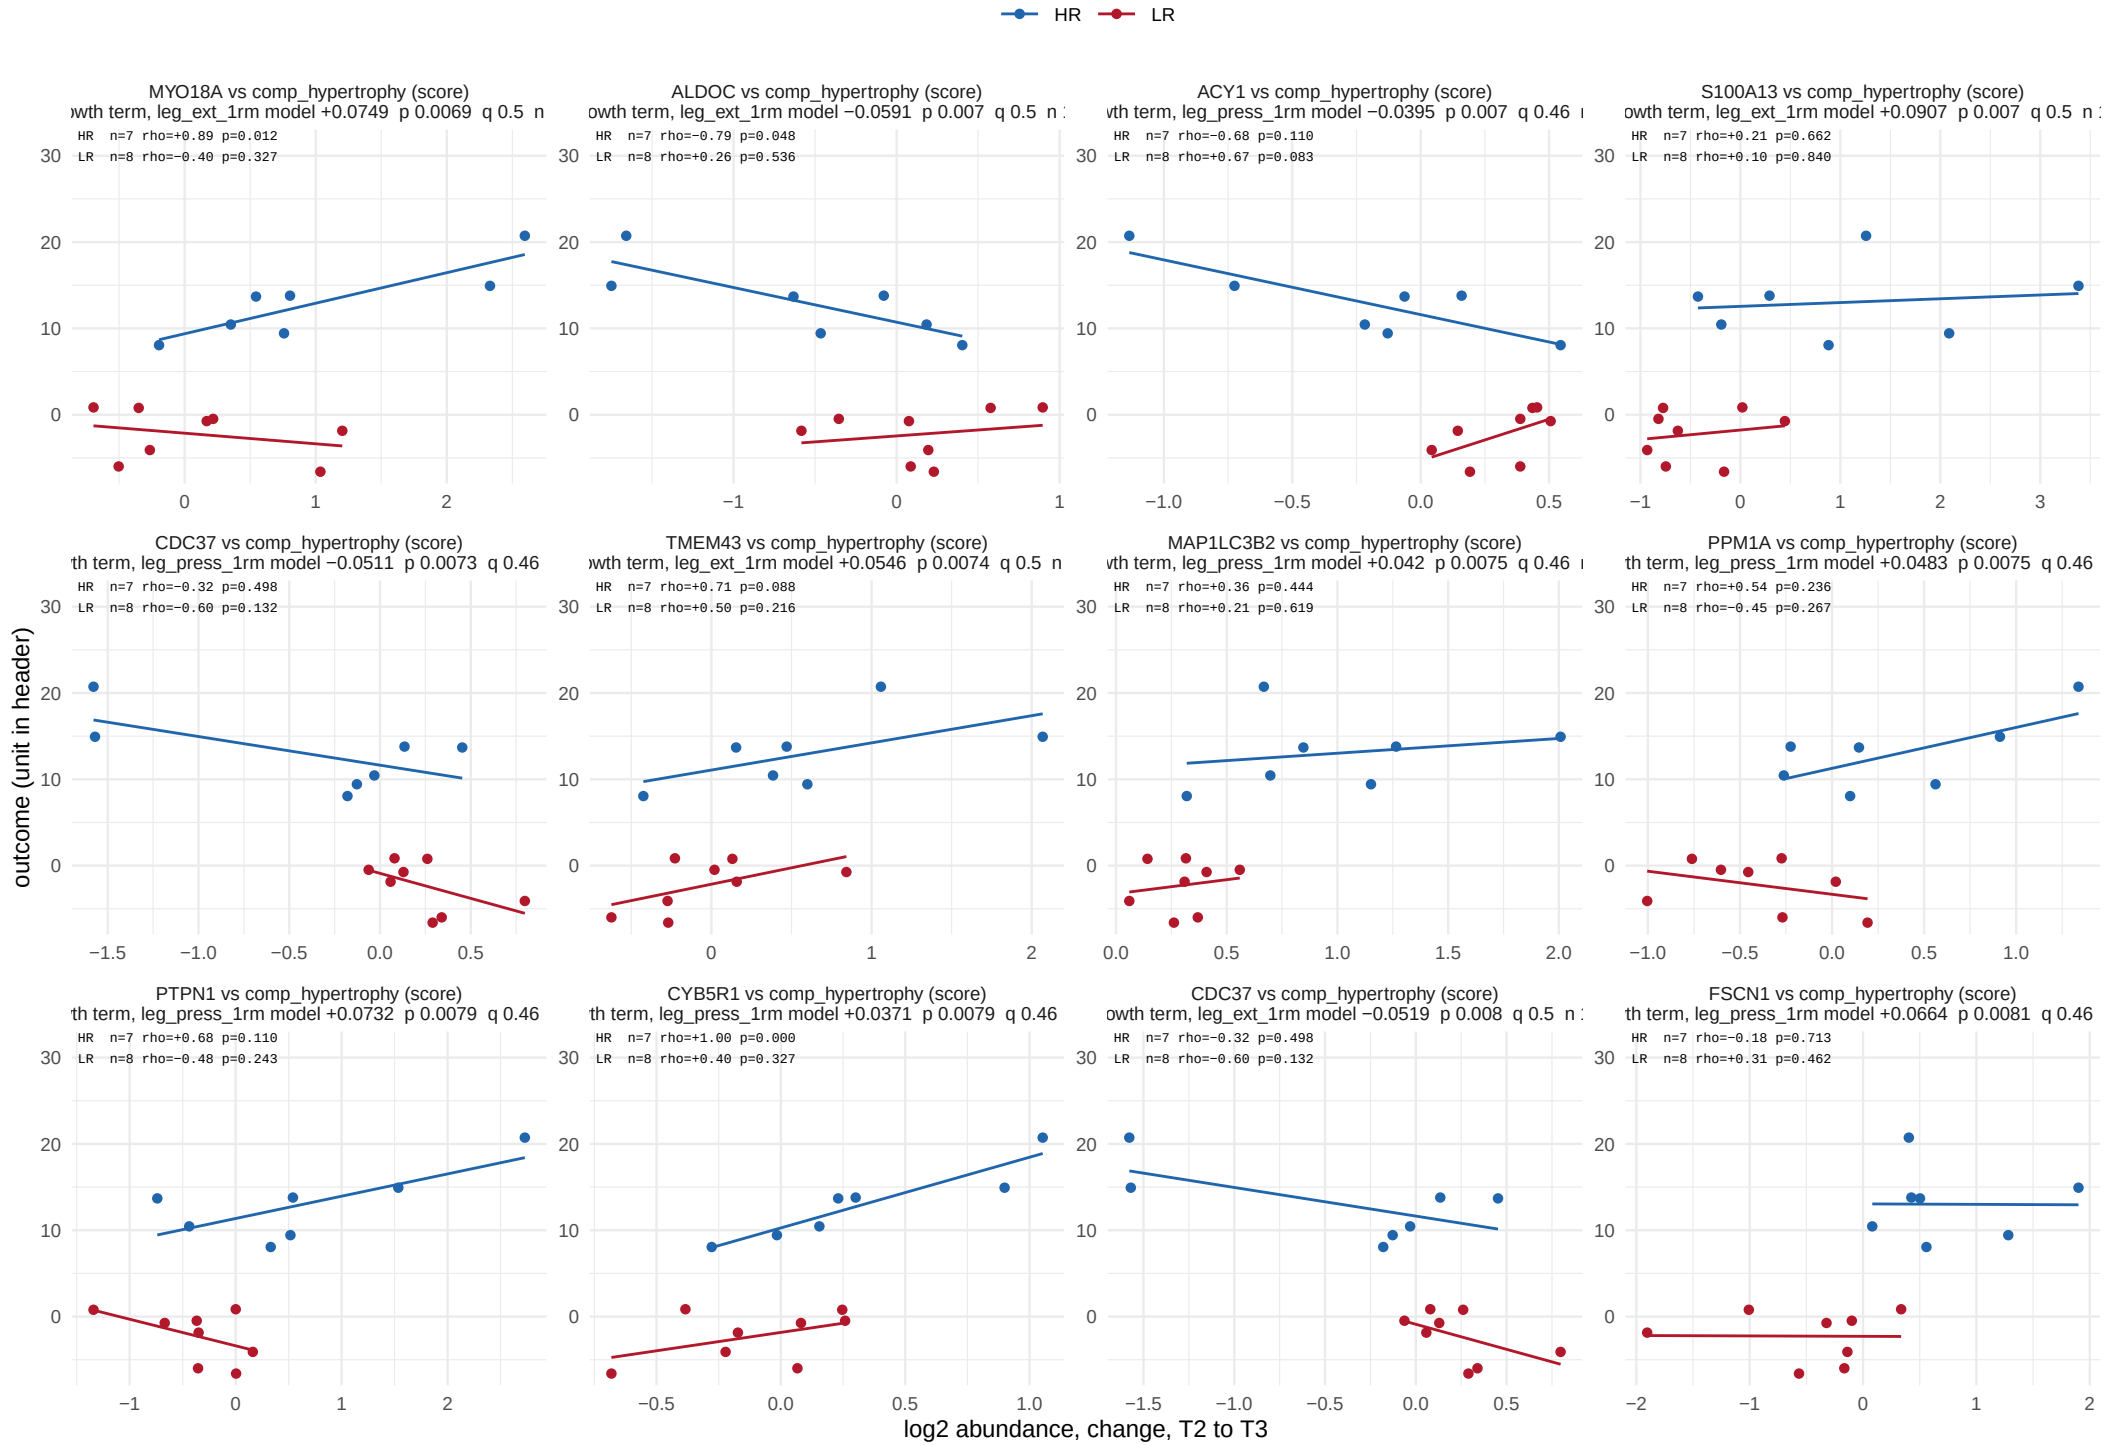

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, acute window


420 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 6 of 35.

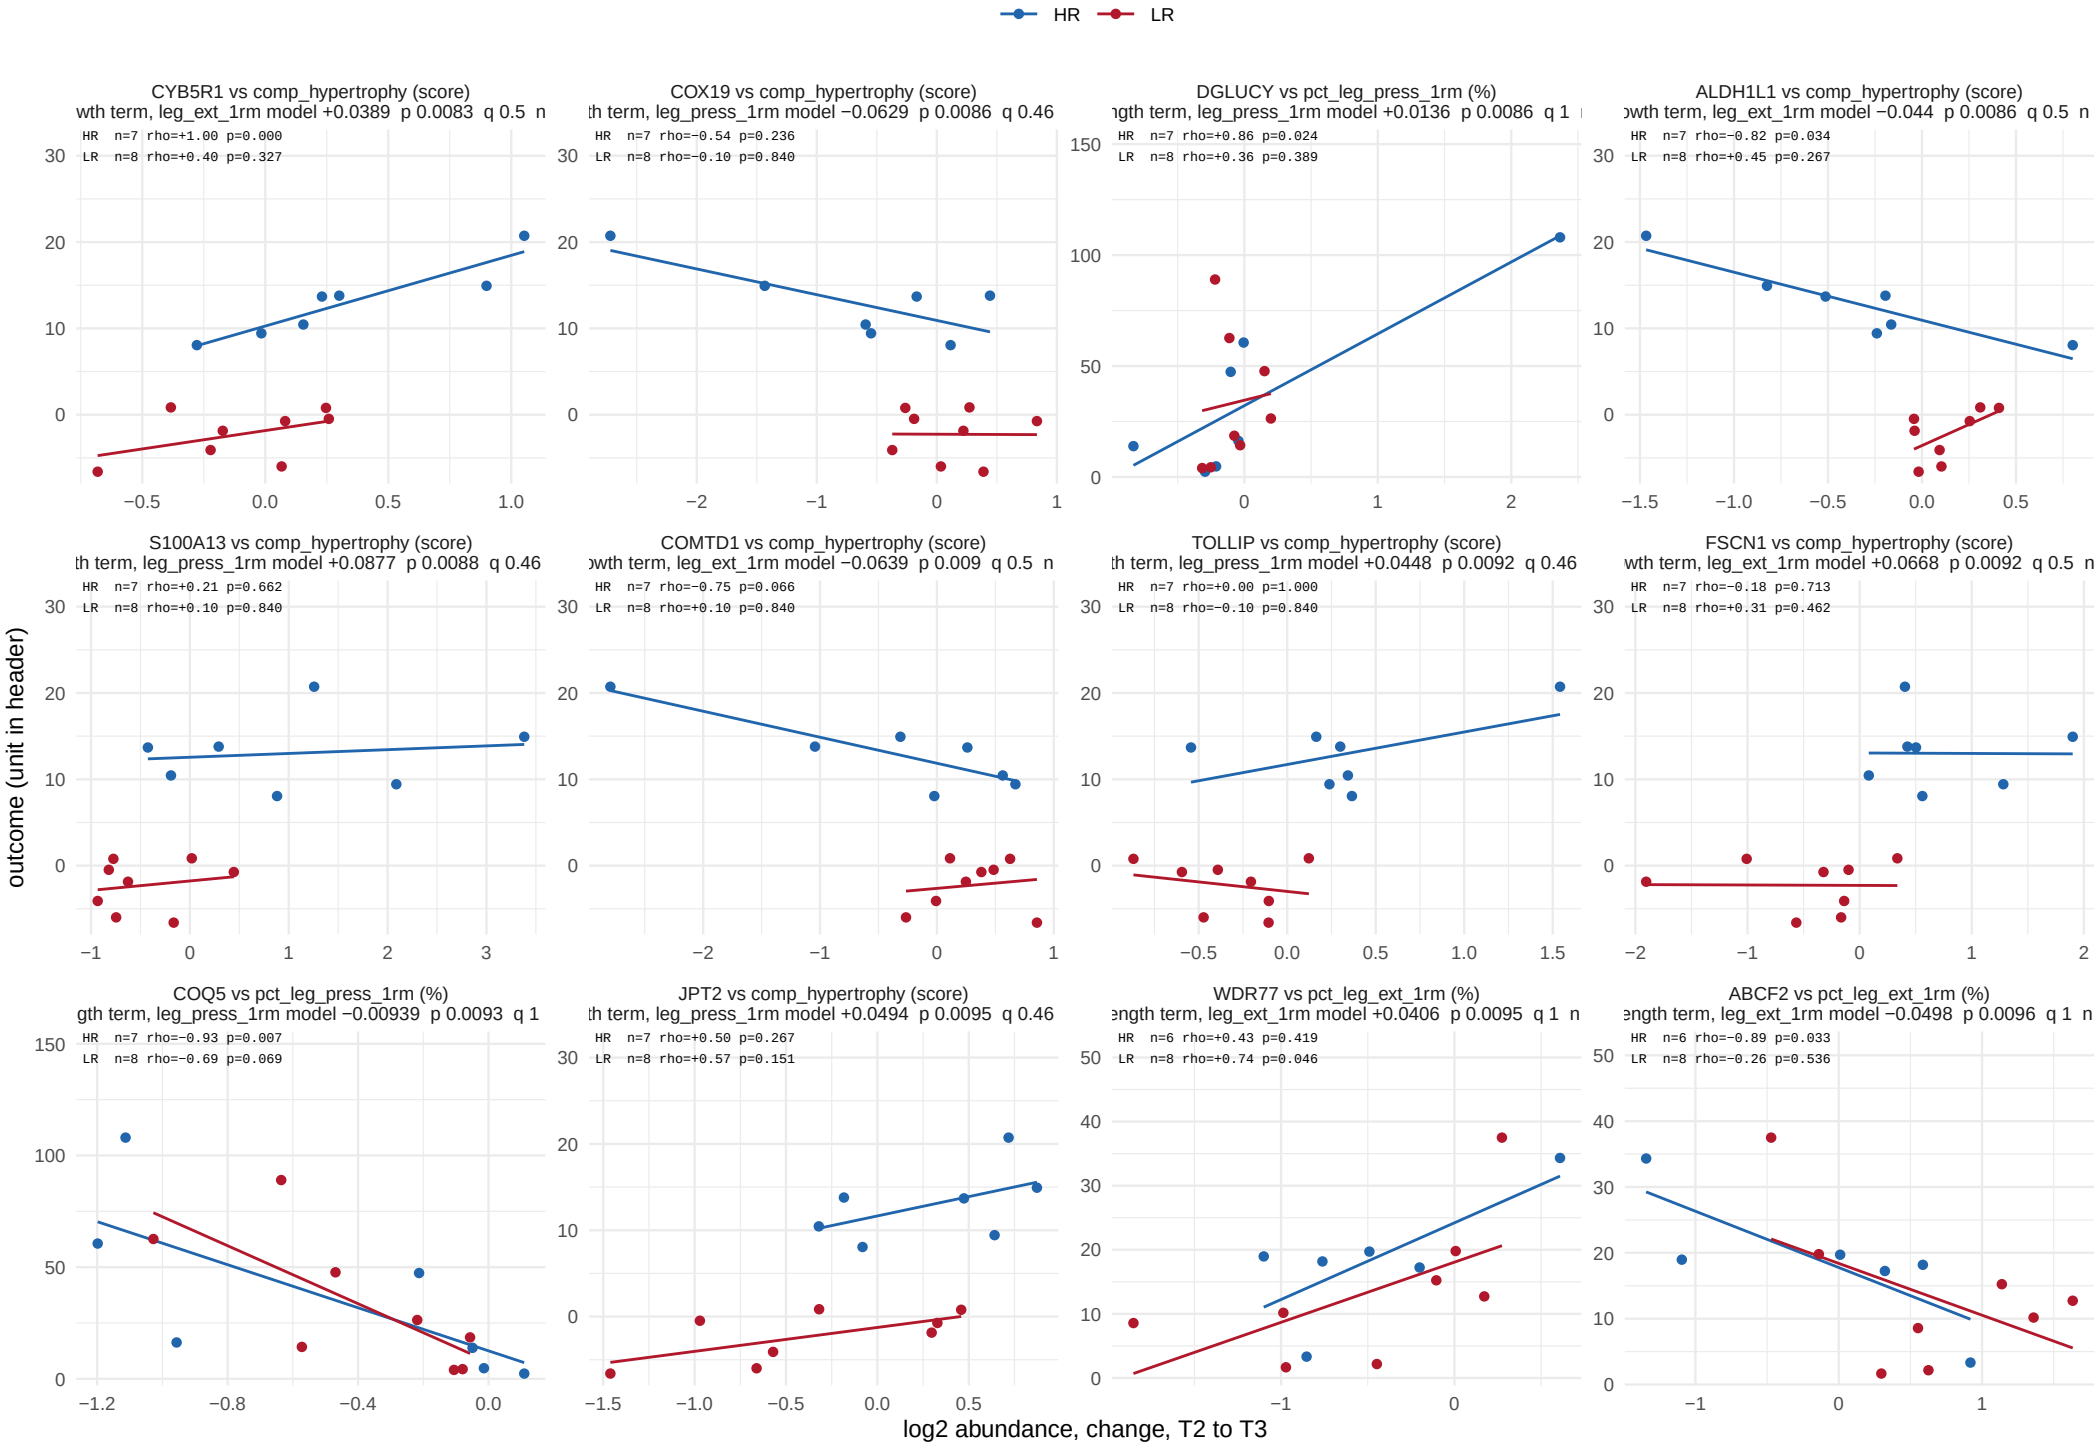

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, acute window


420 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 7 of 35.

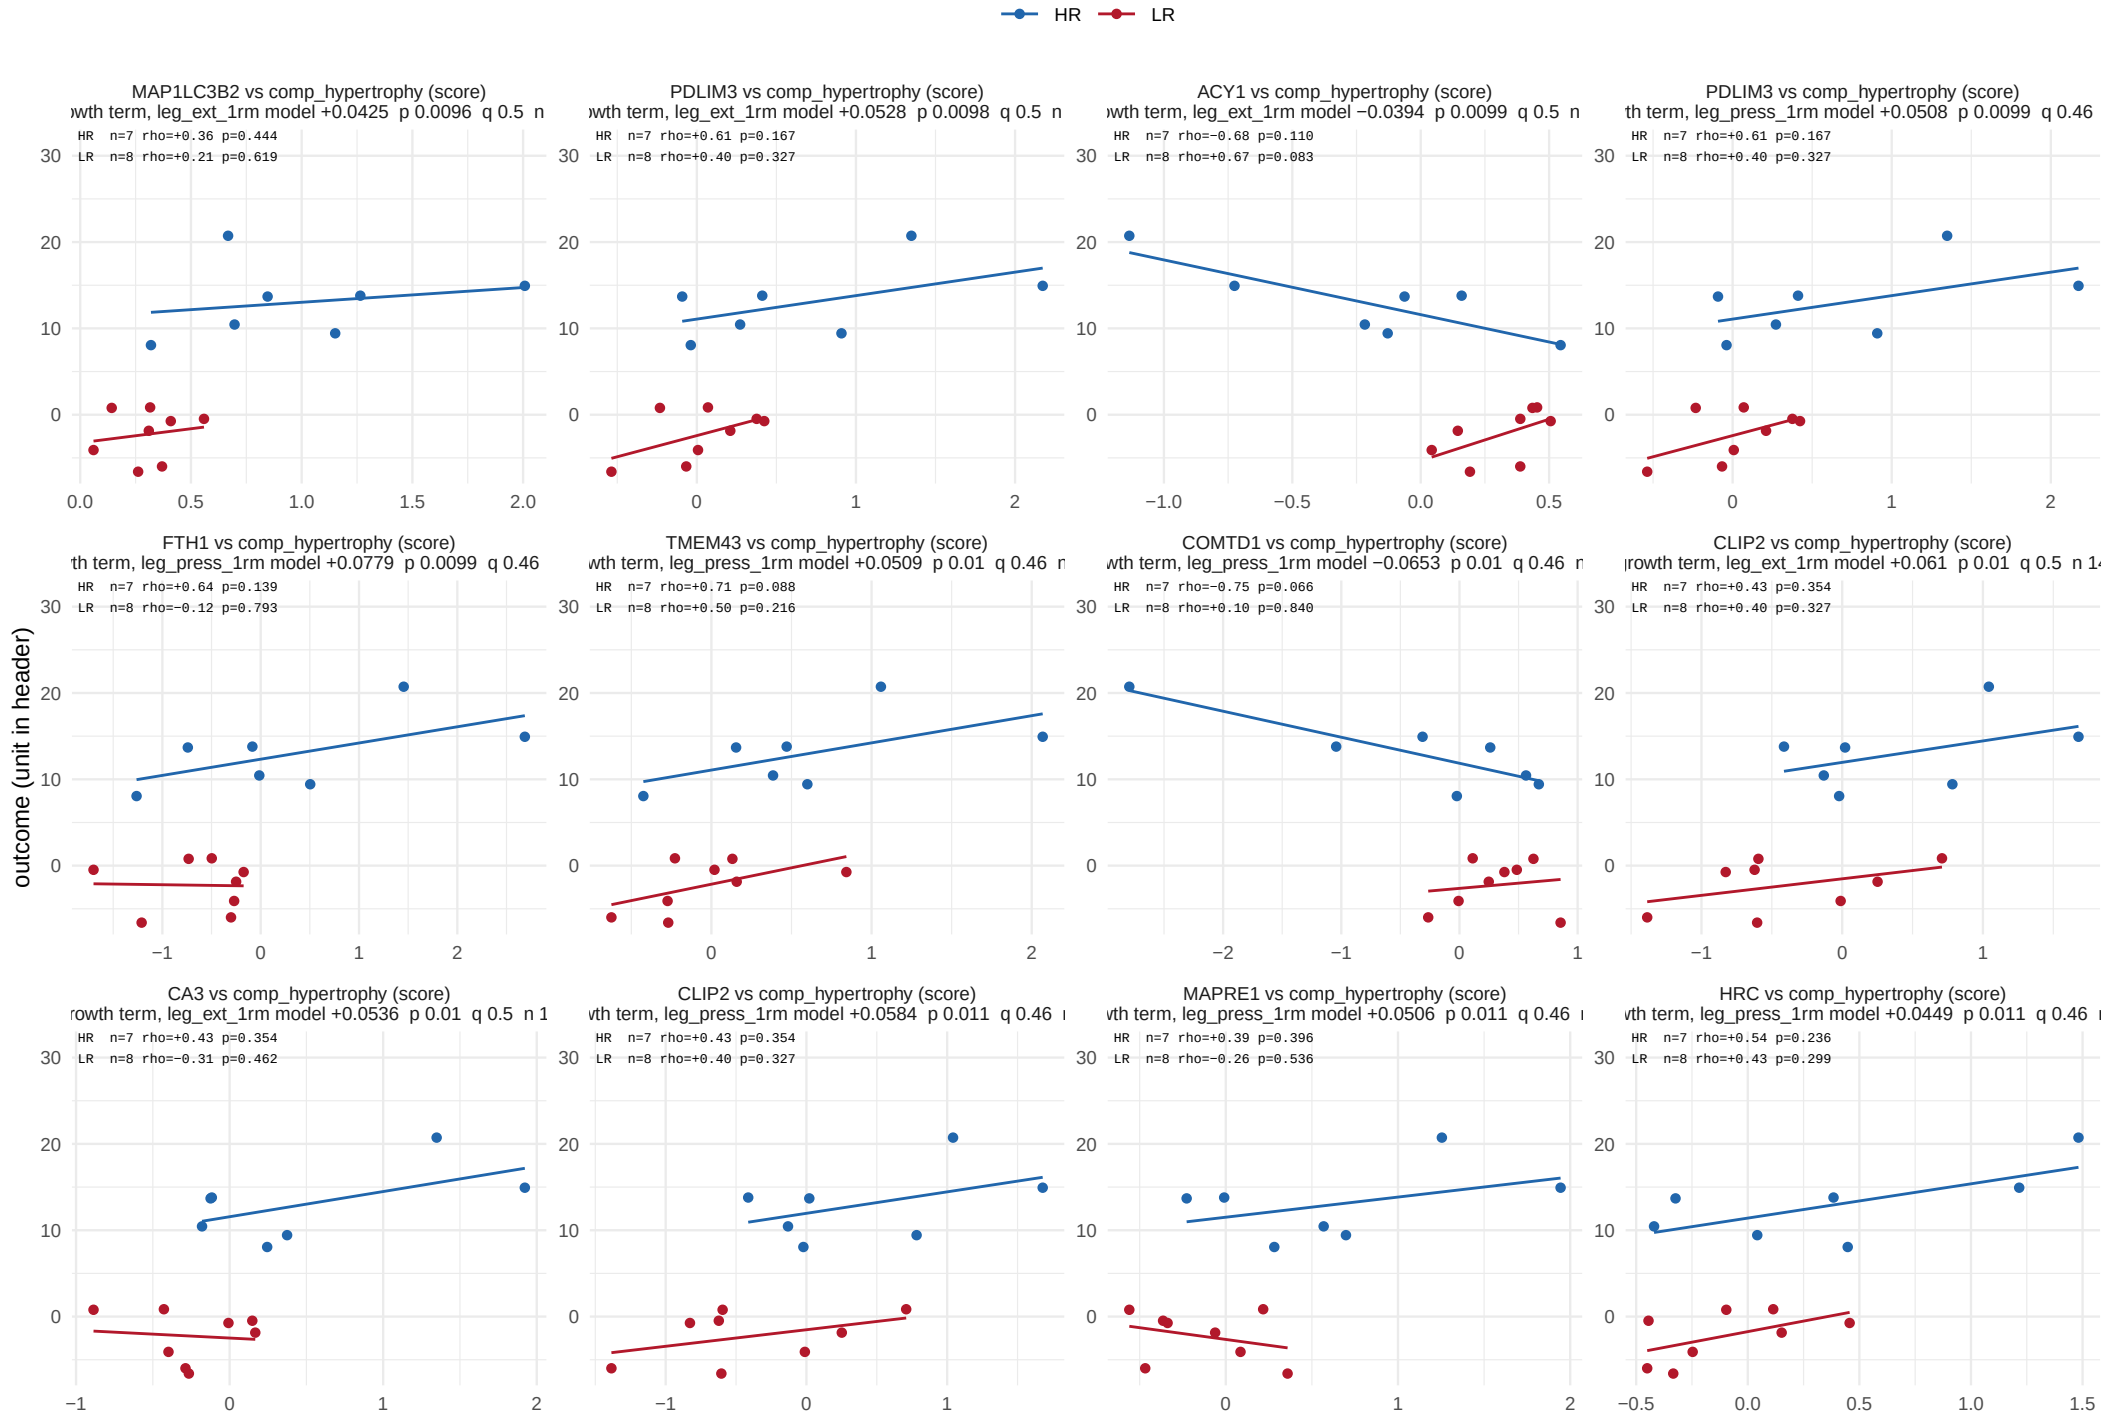

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, acute window


420 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 8 of 35.

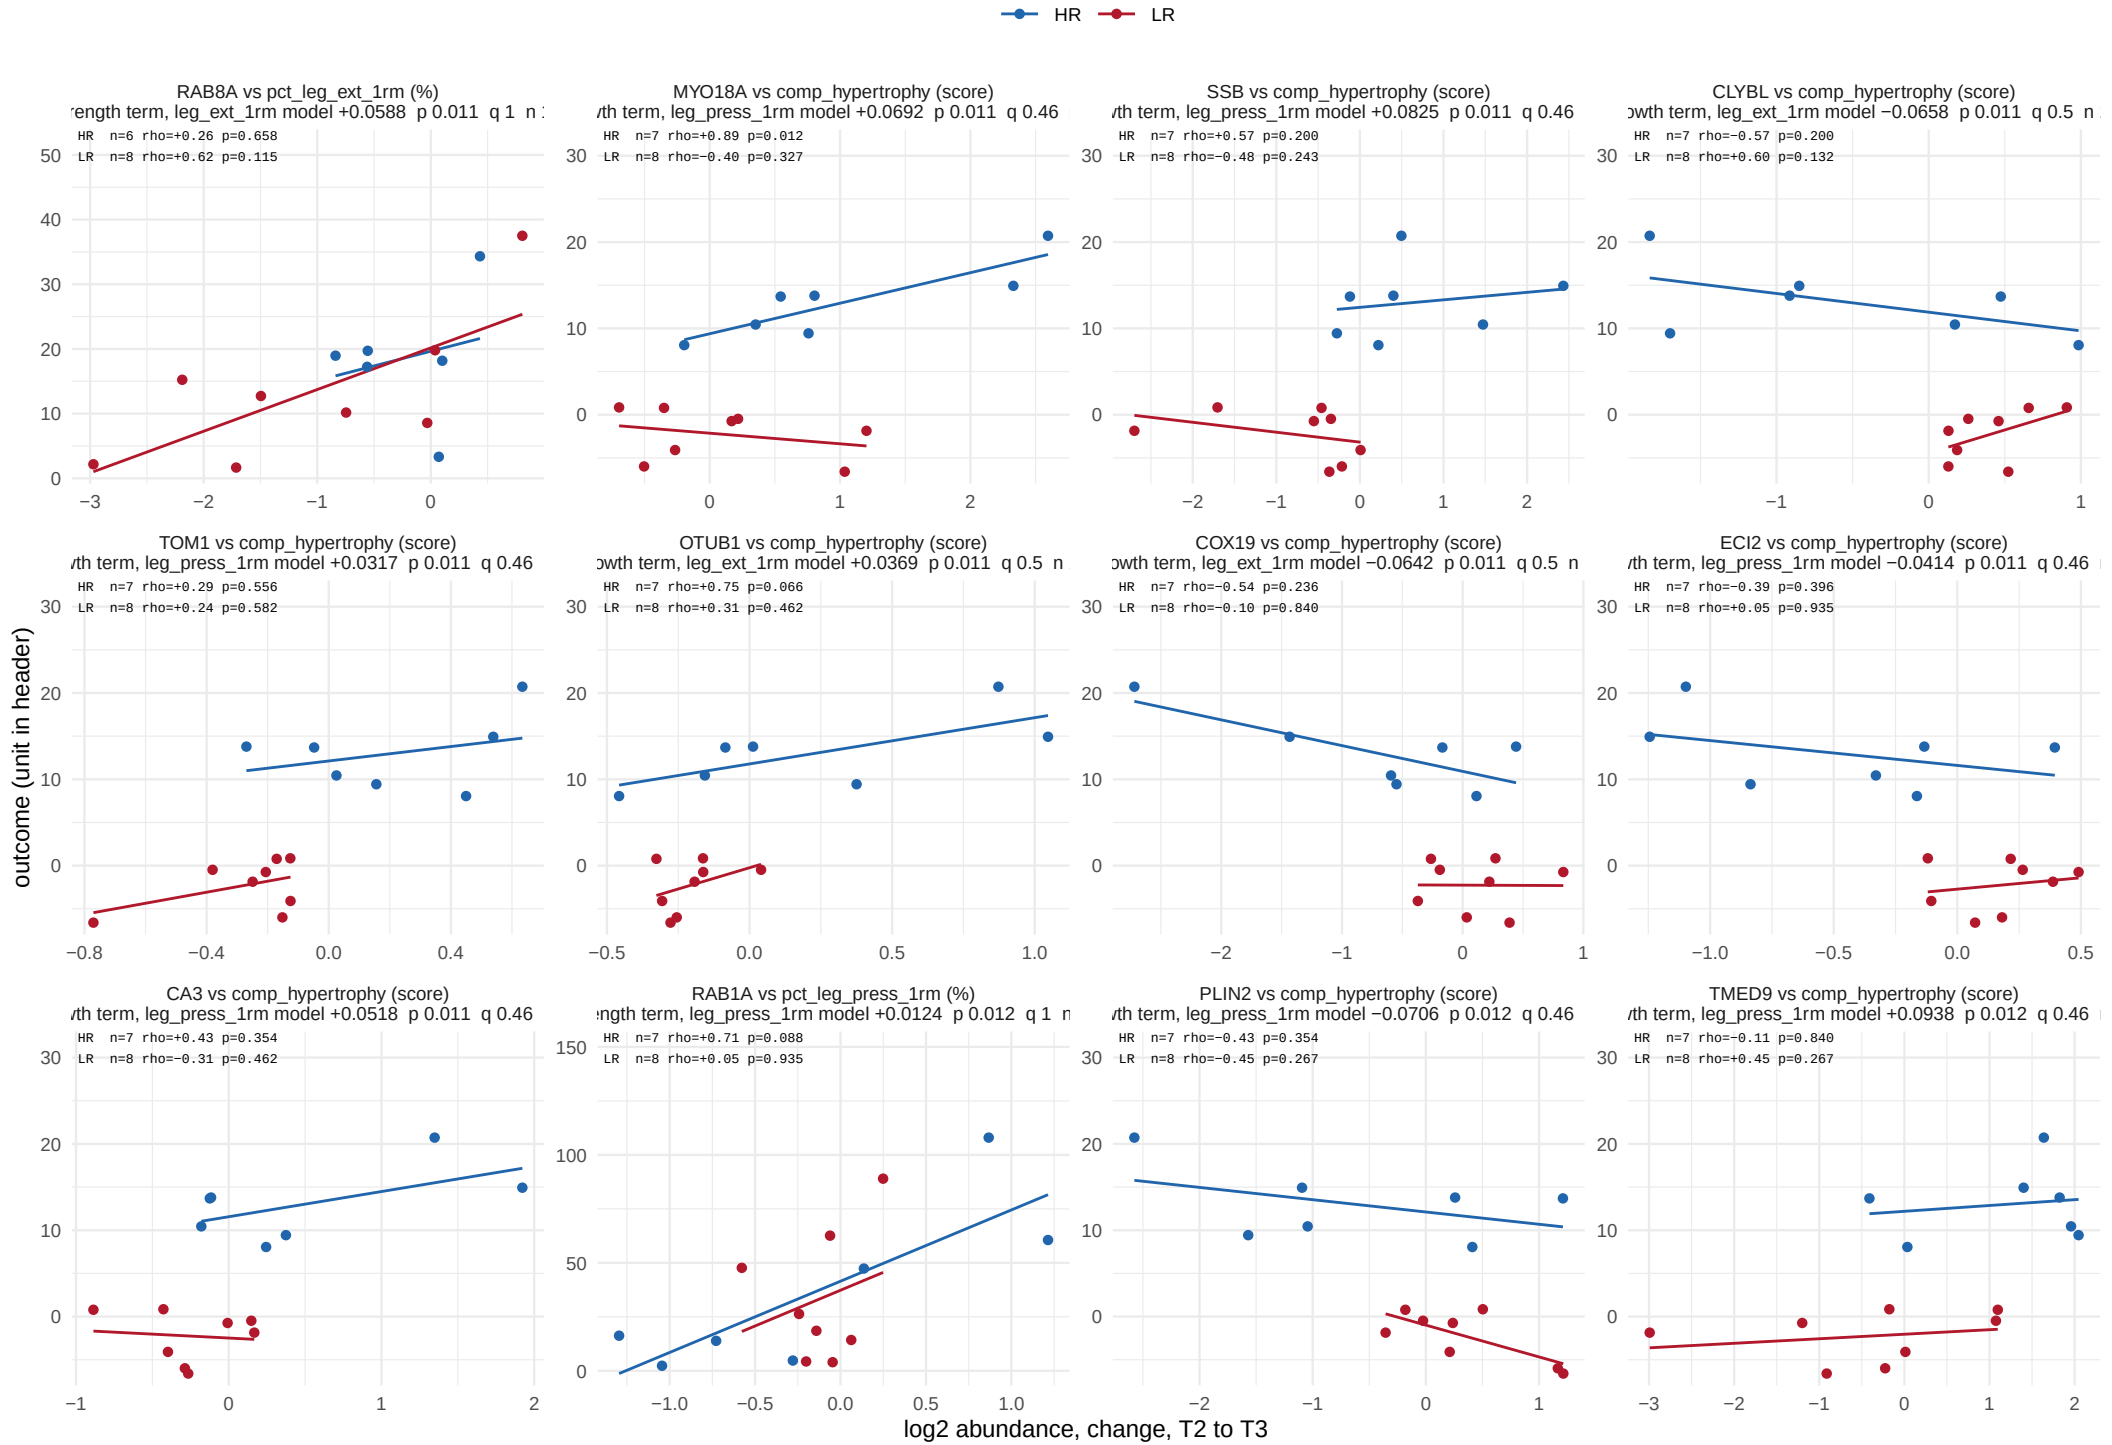

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, acute window


420 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 9 of 35.

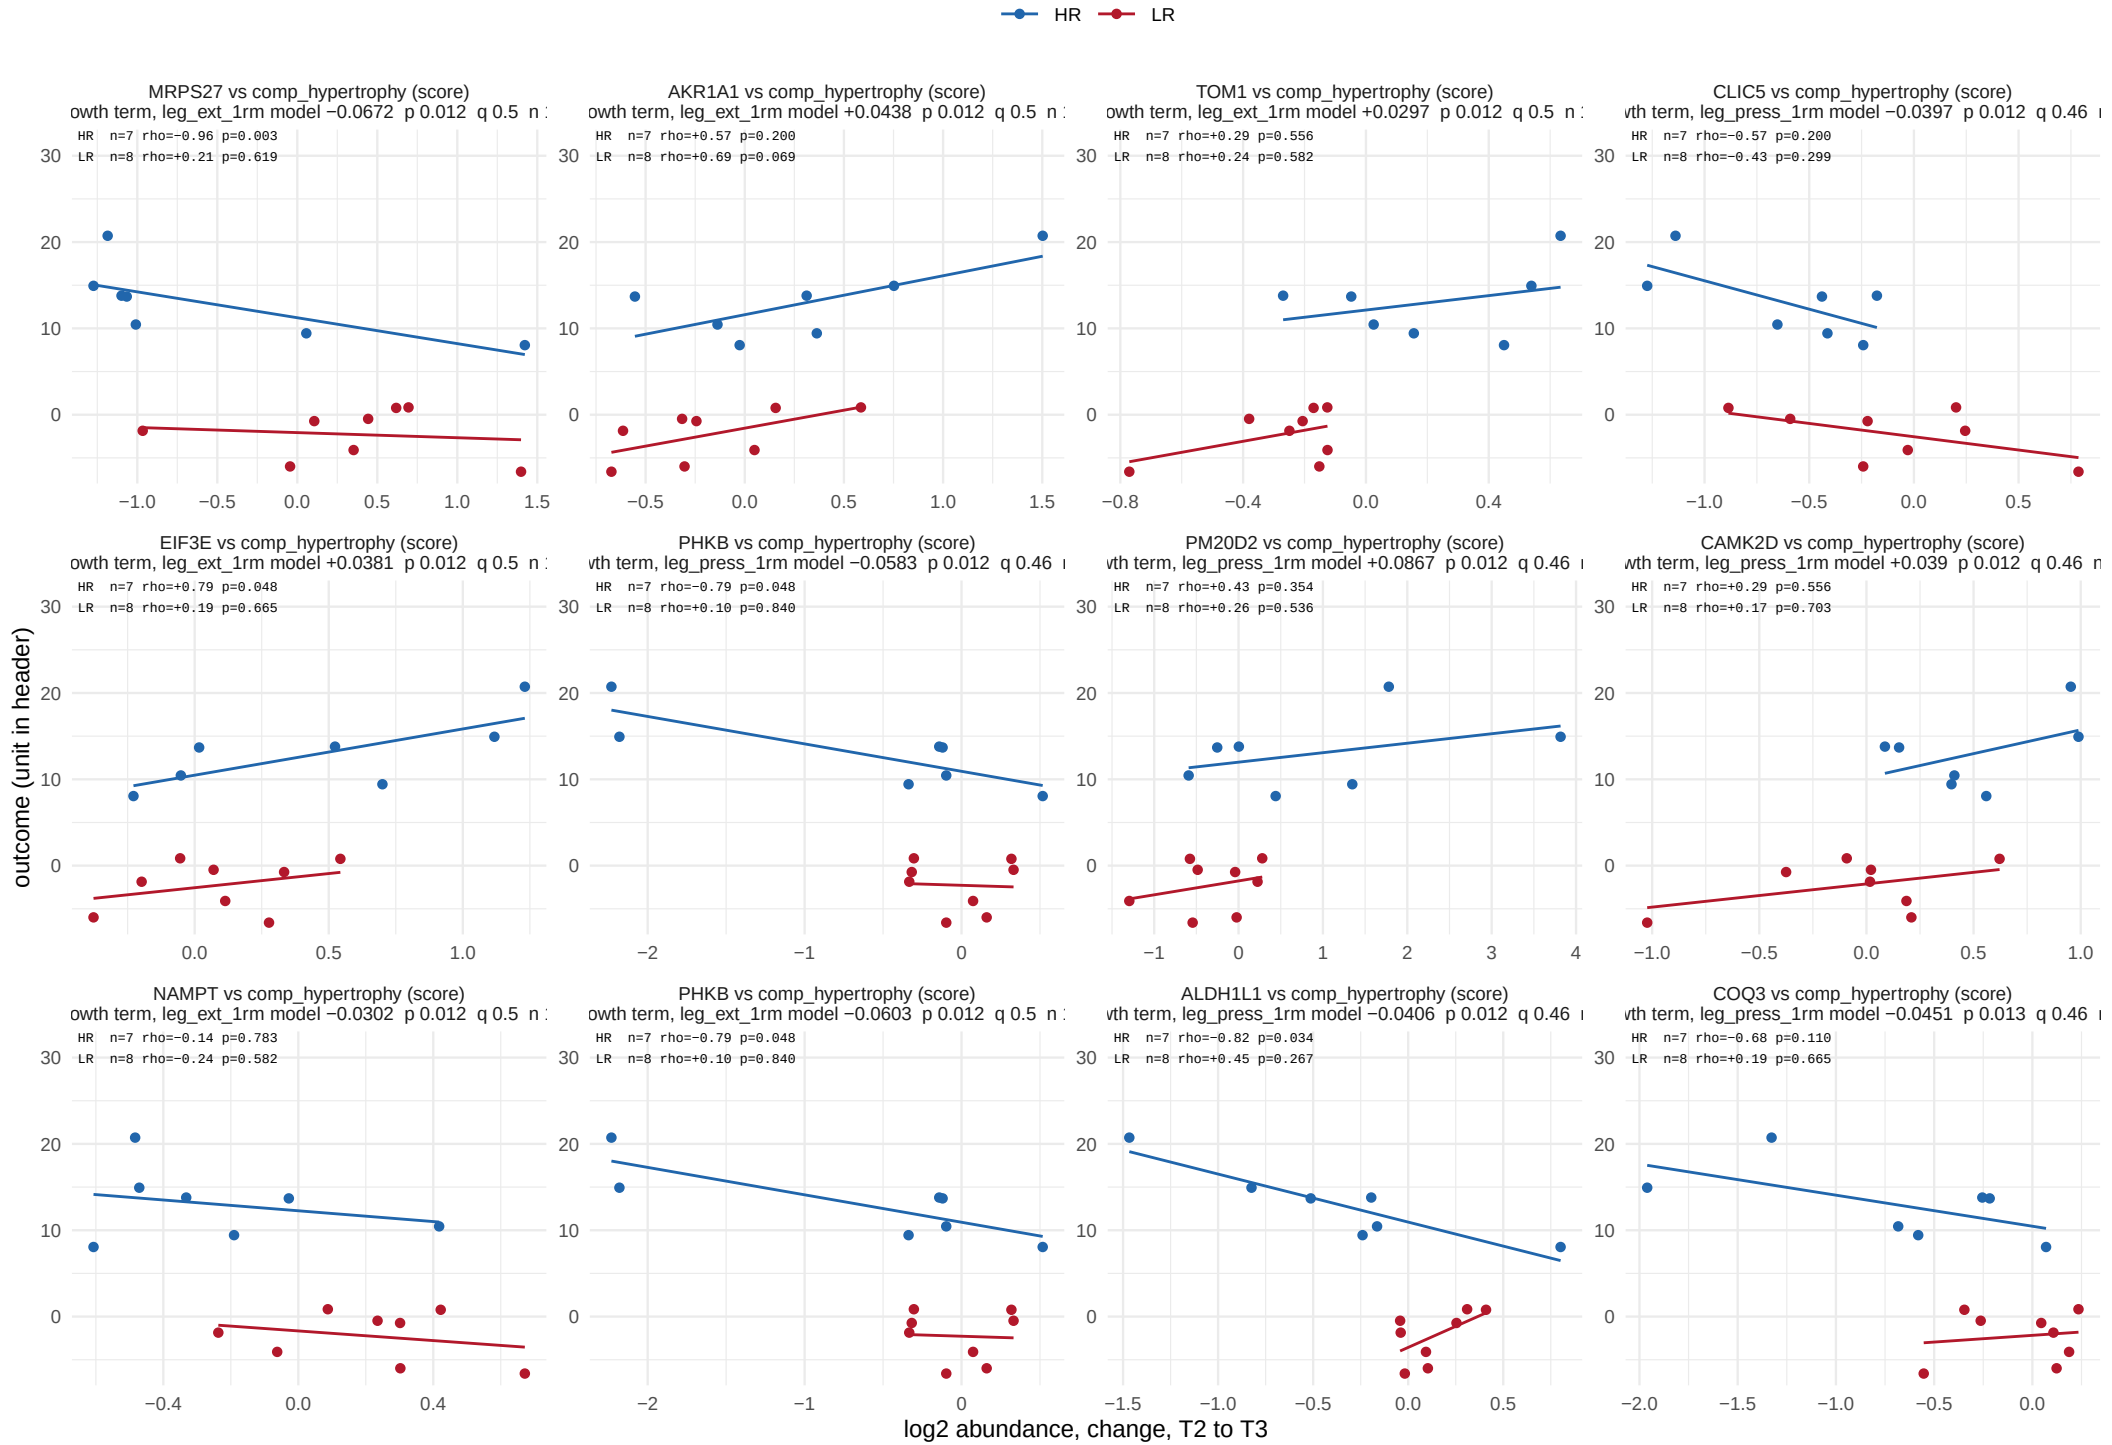

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, acute window


420 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 10 of 35.

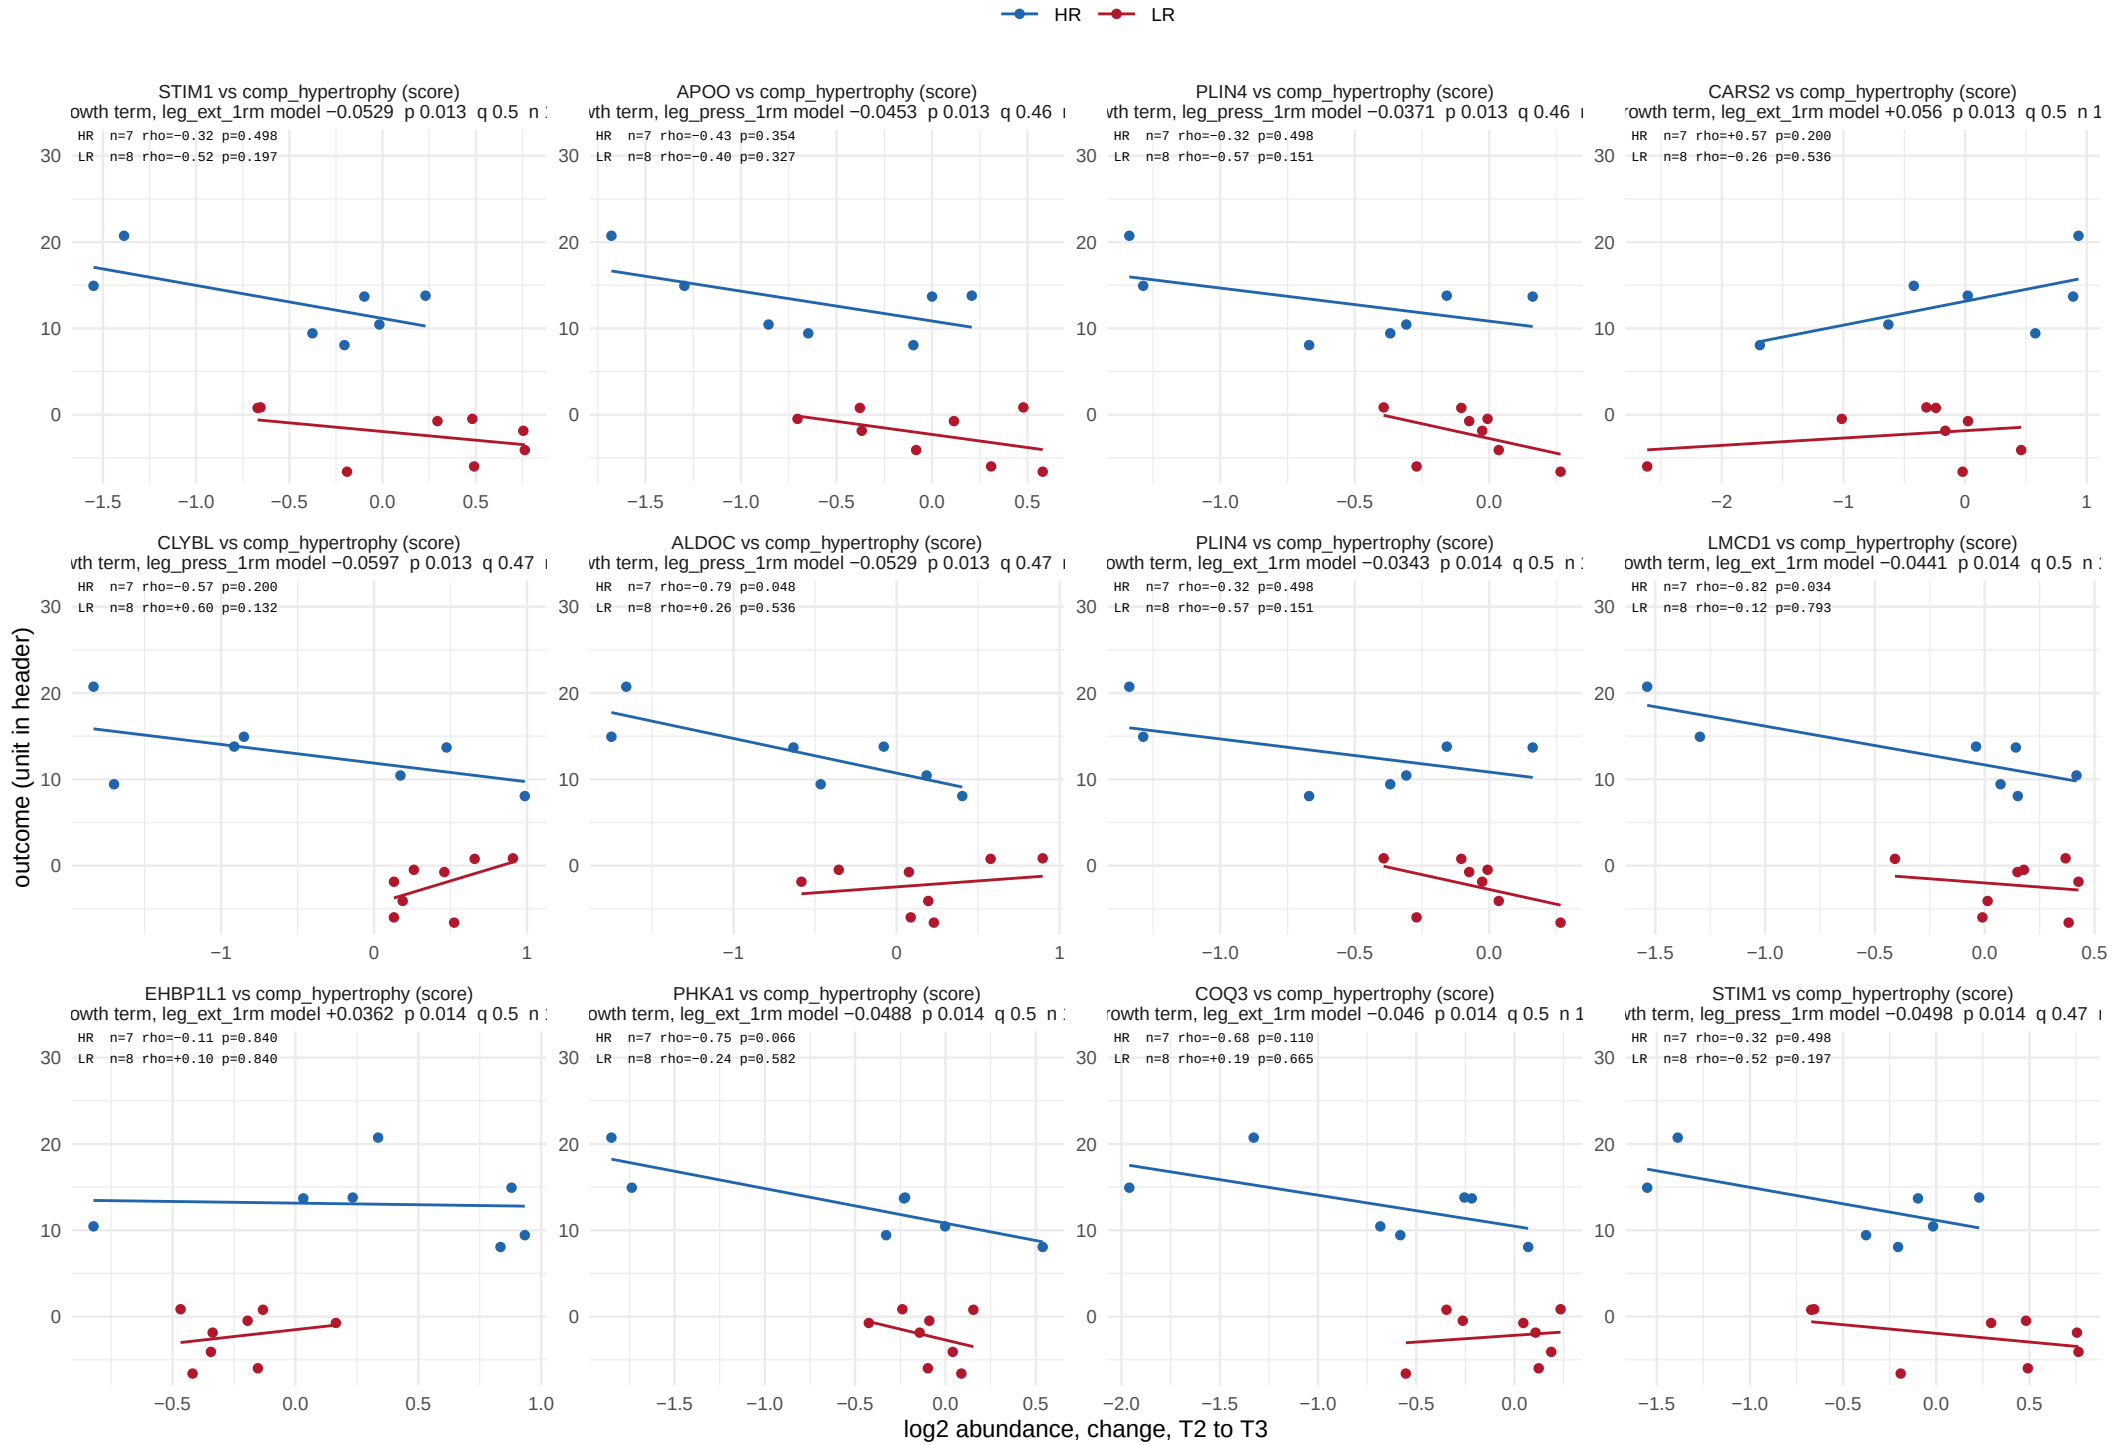

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, acute window


420 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 11 of 35.

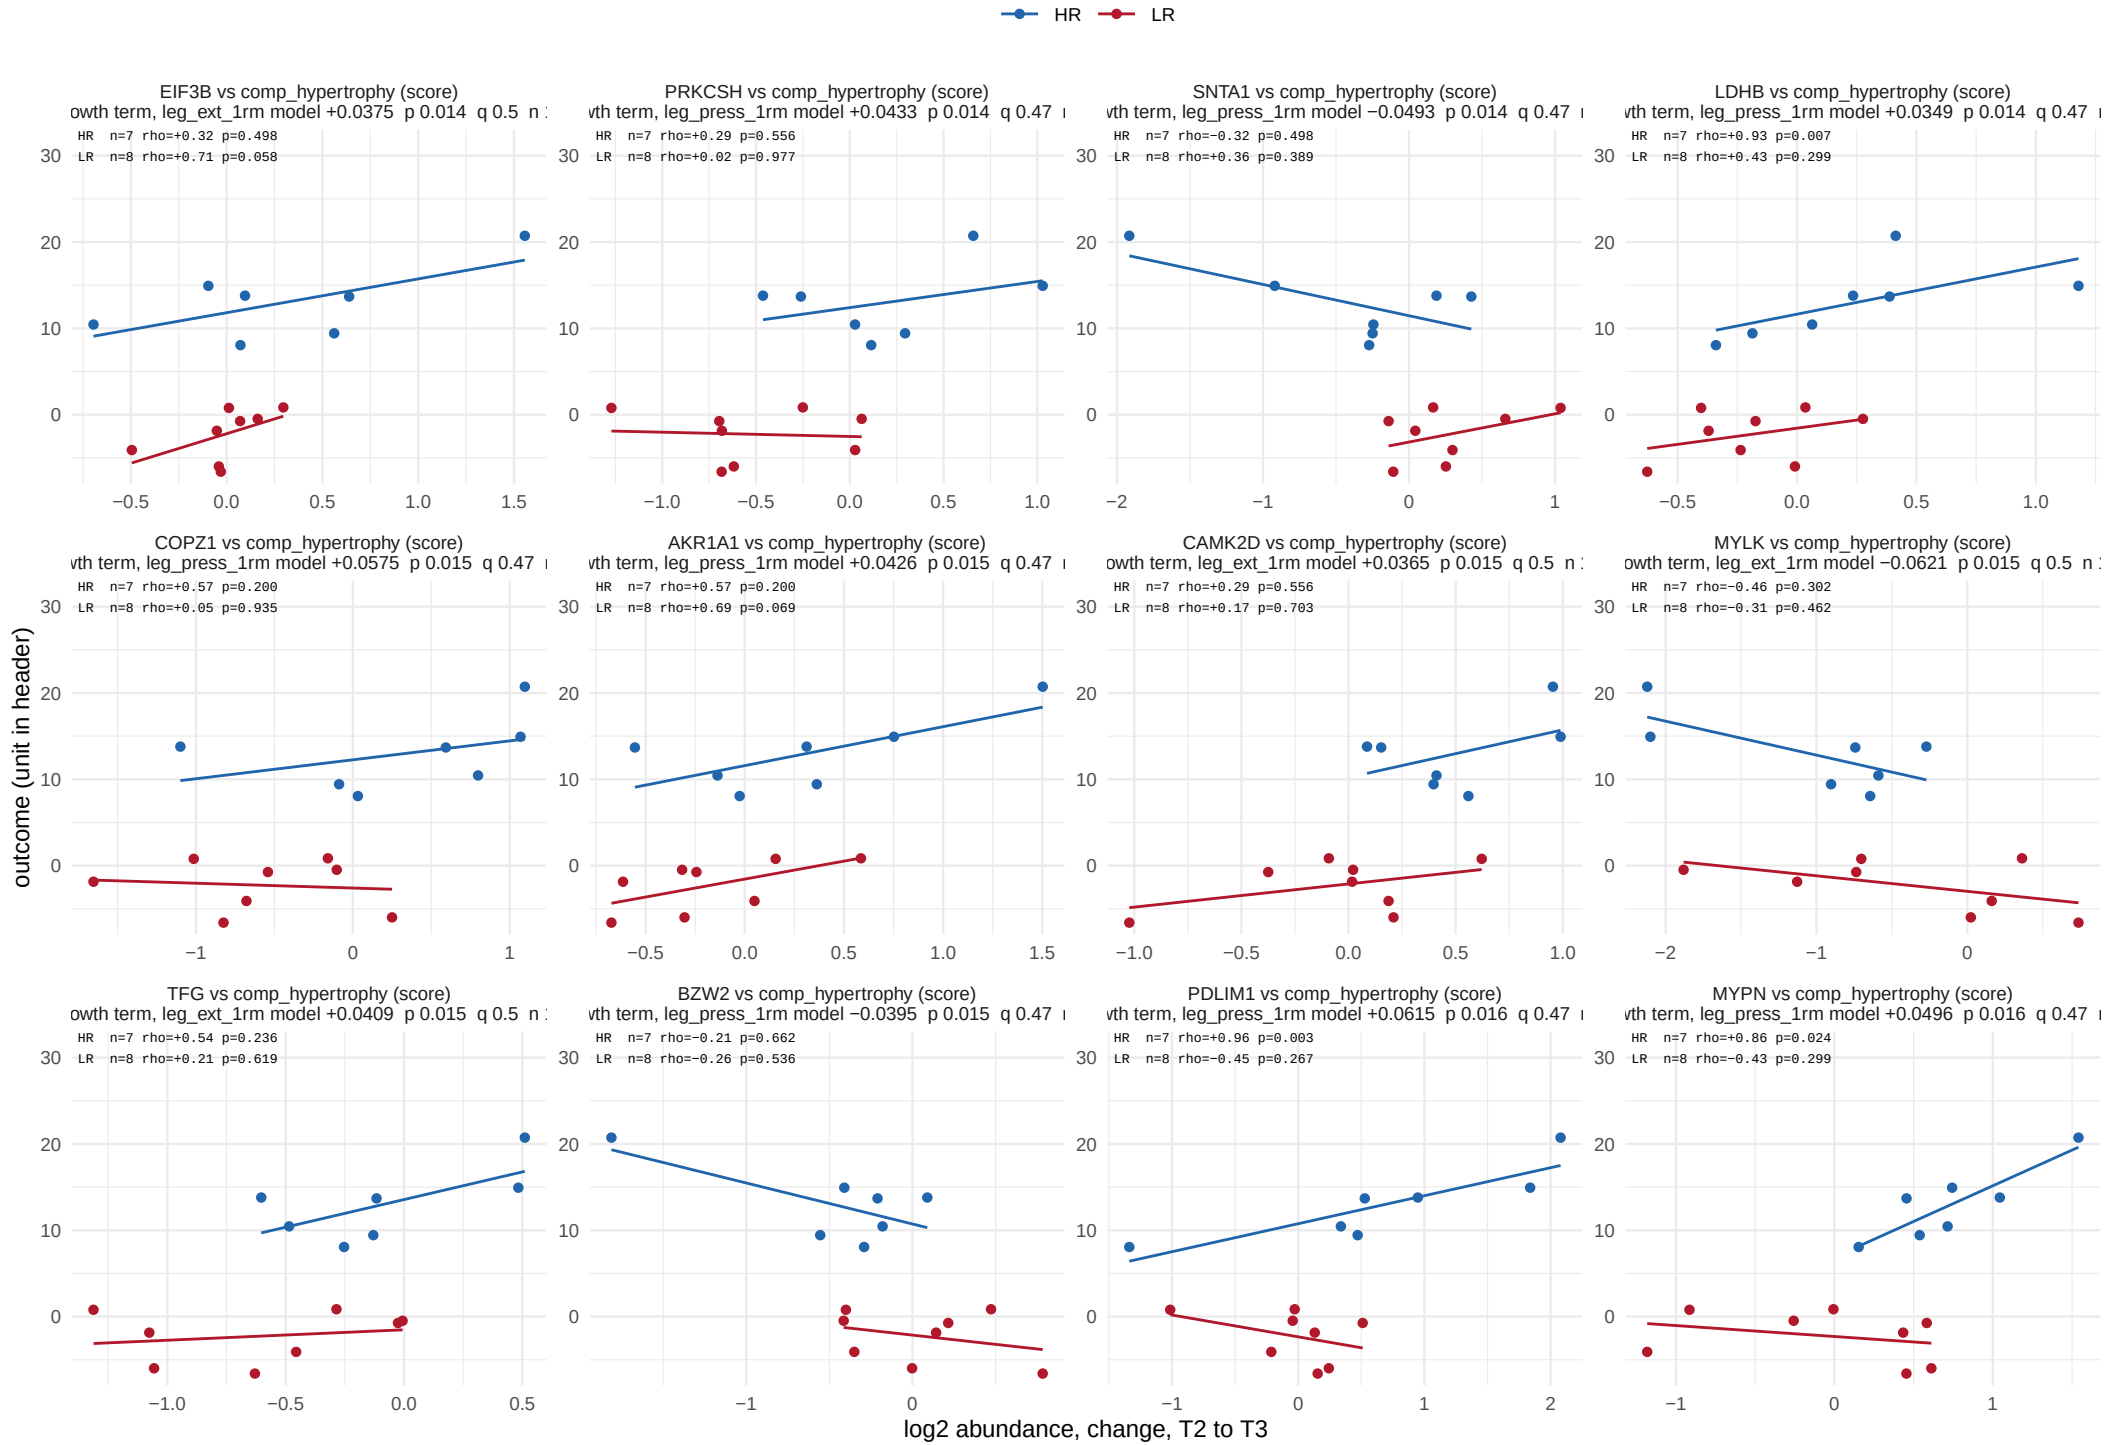

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, acute window


420 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 12 of 35.

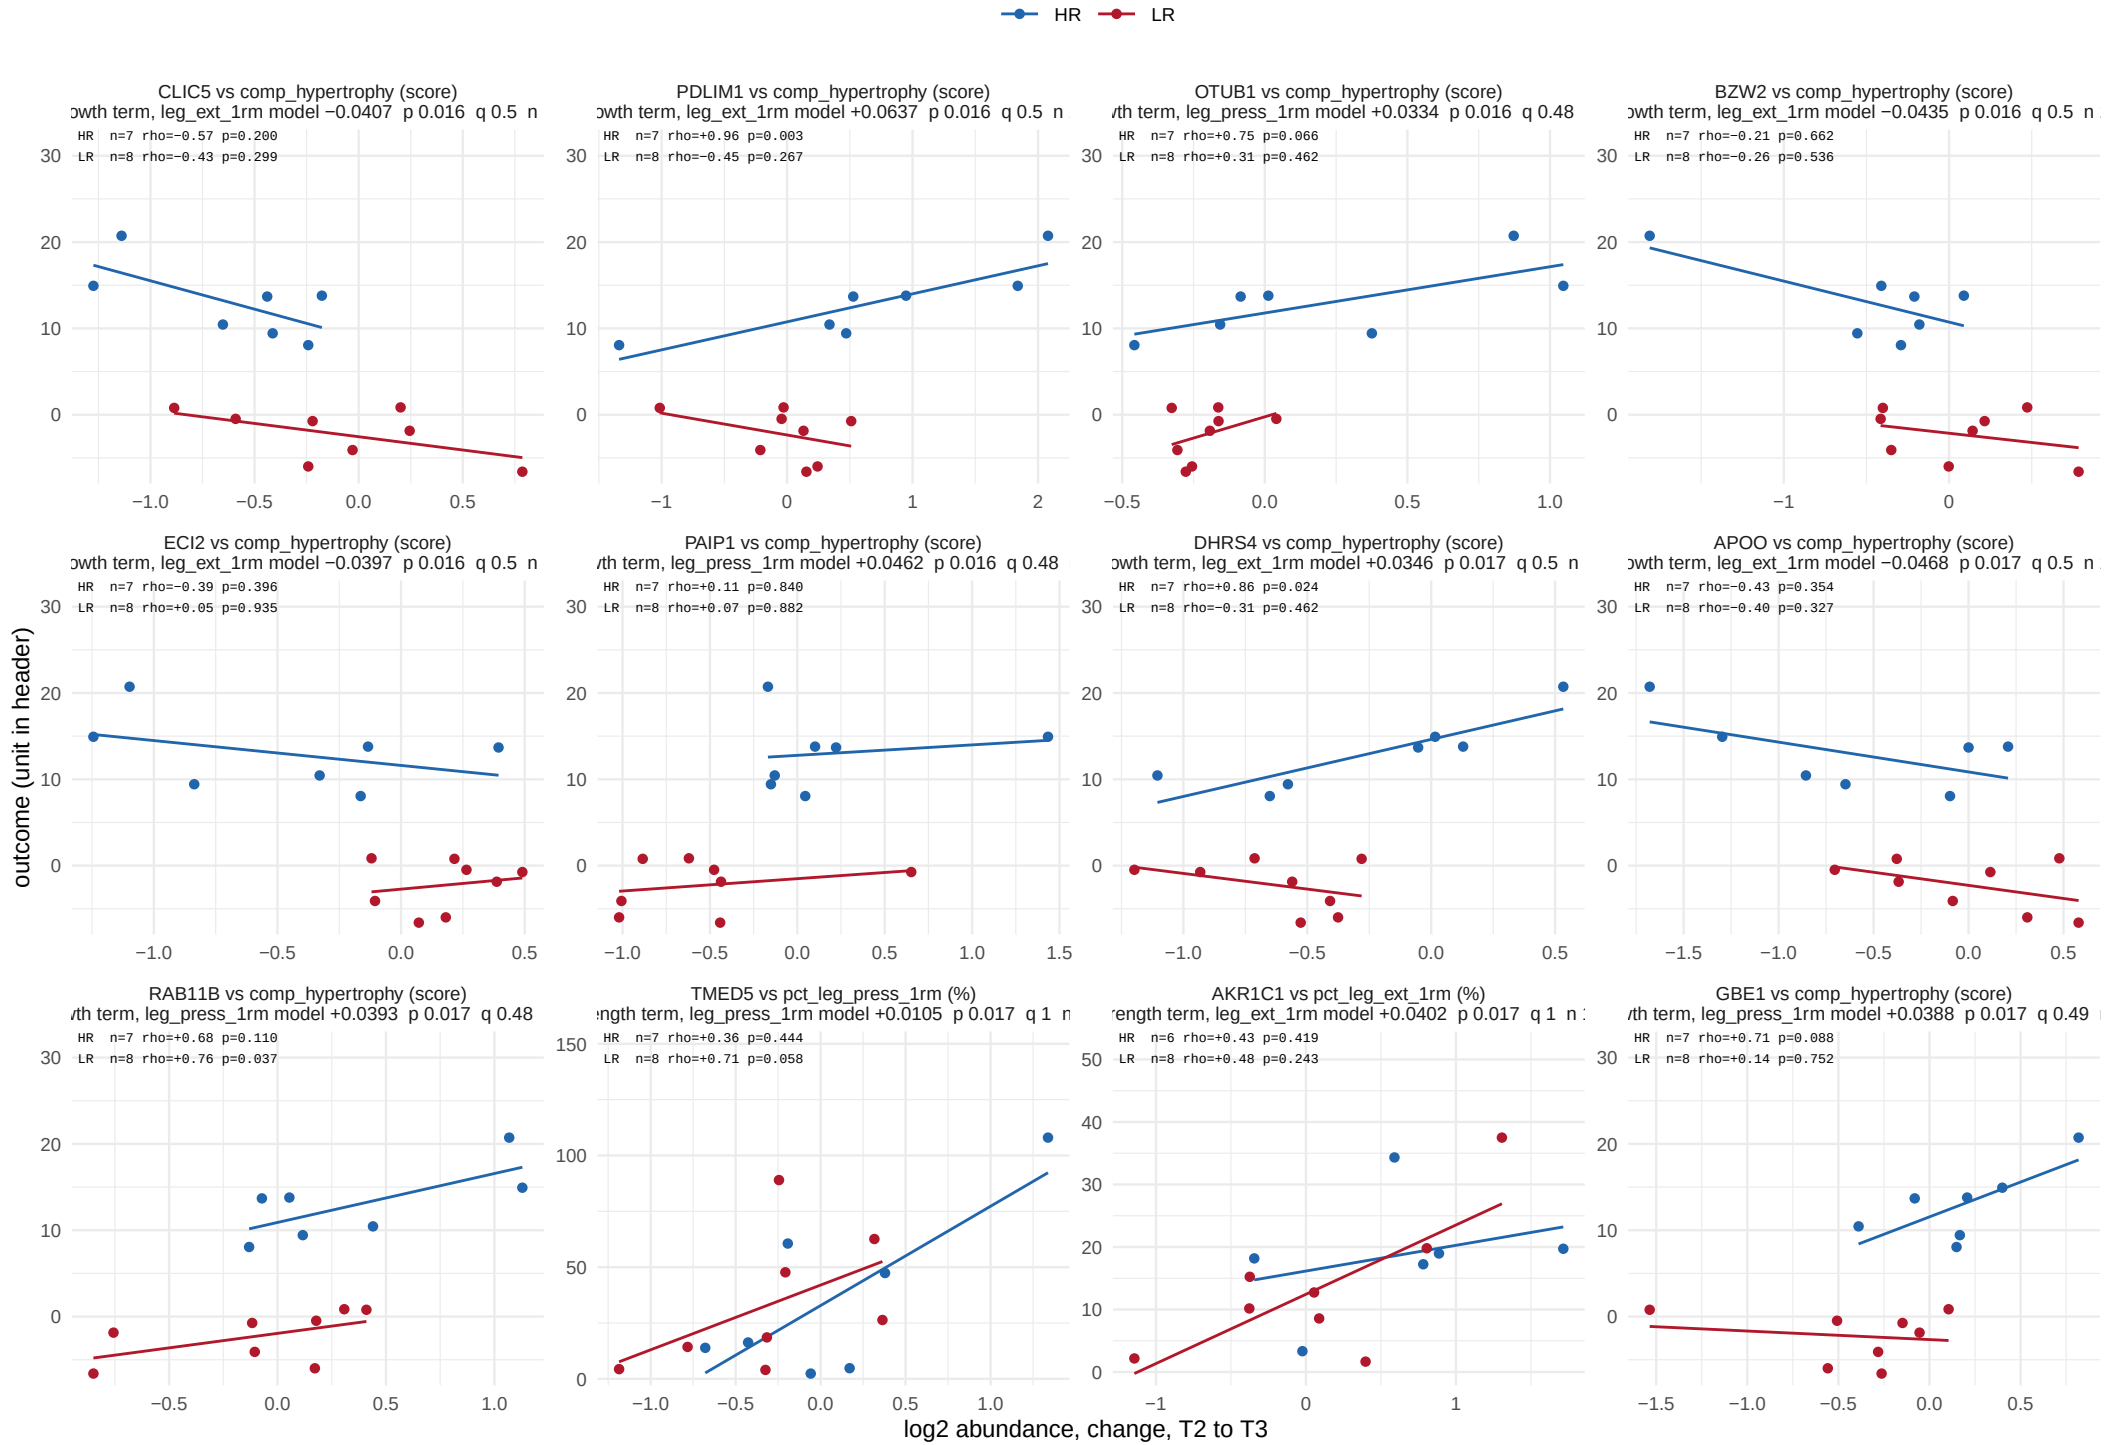

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, acute window


420 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 13 of 35.

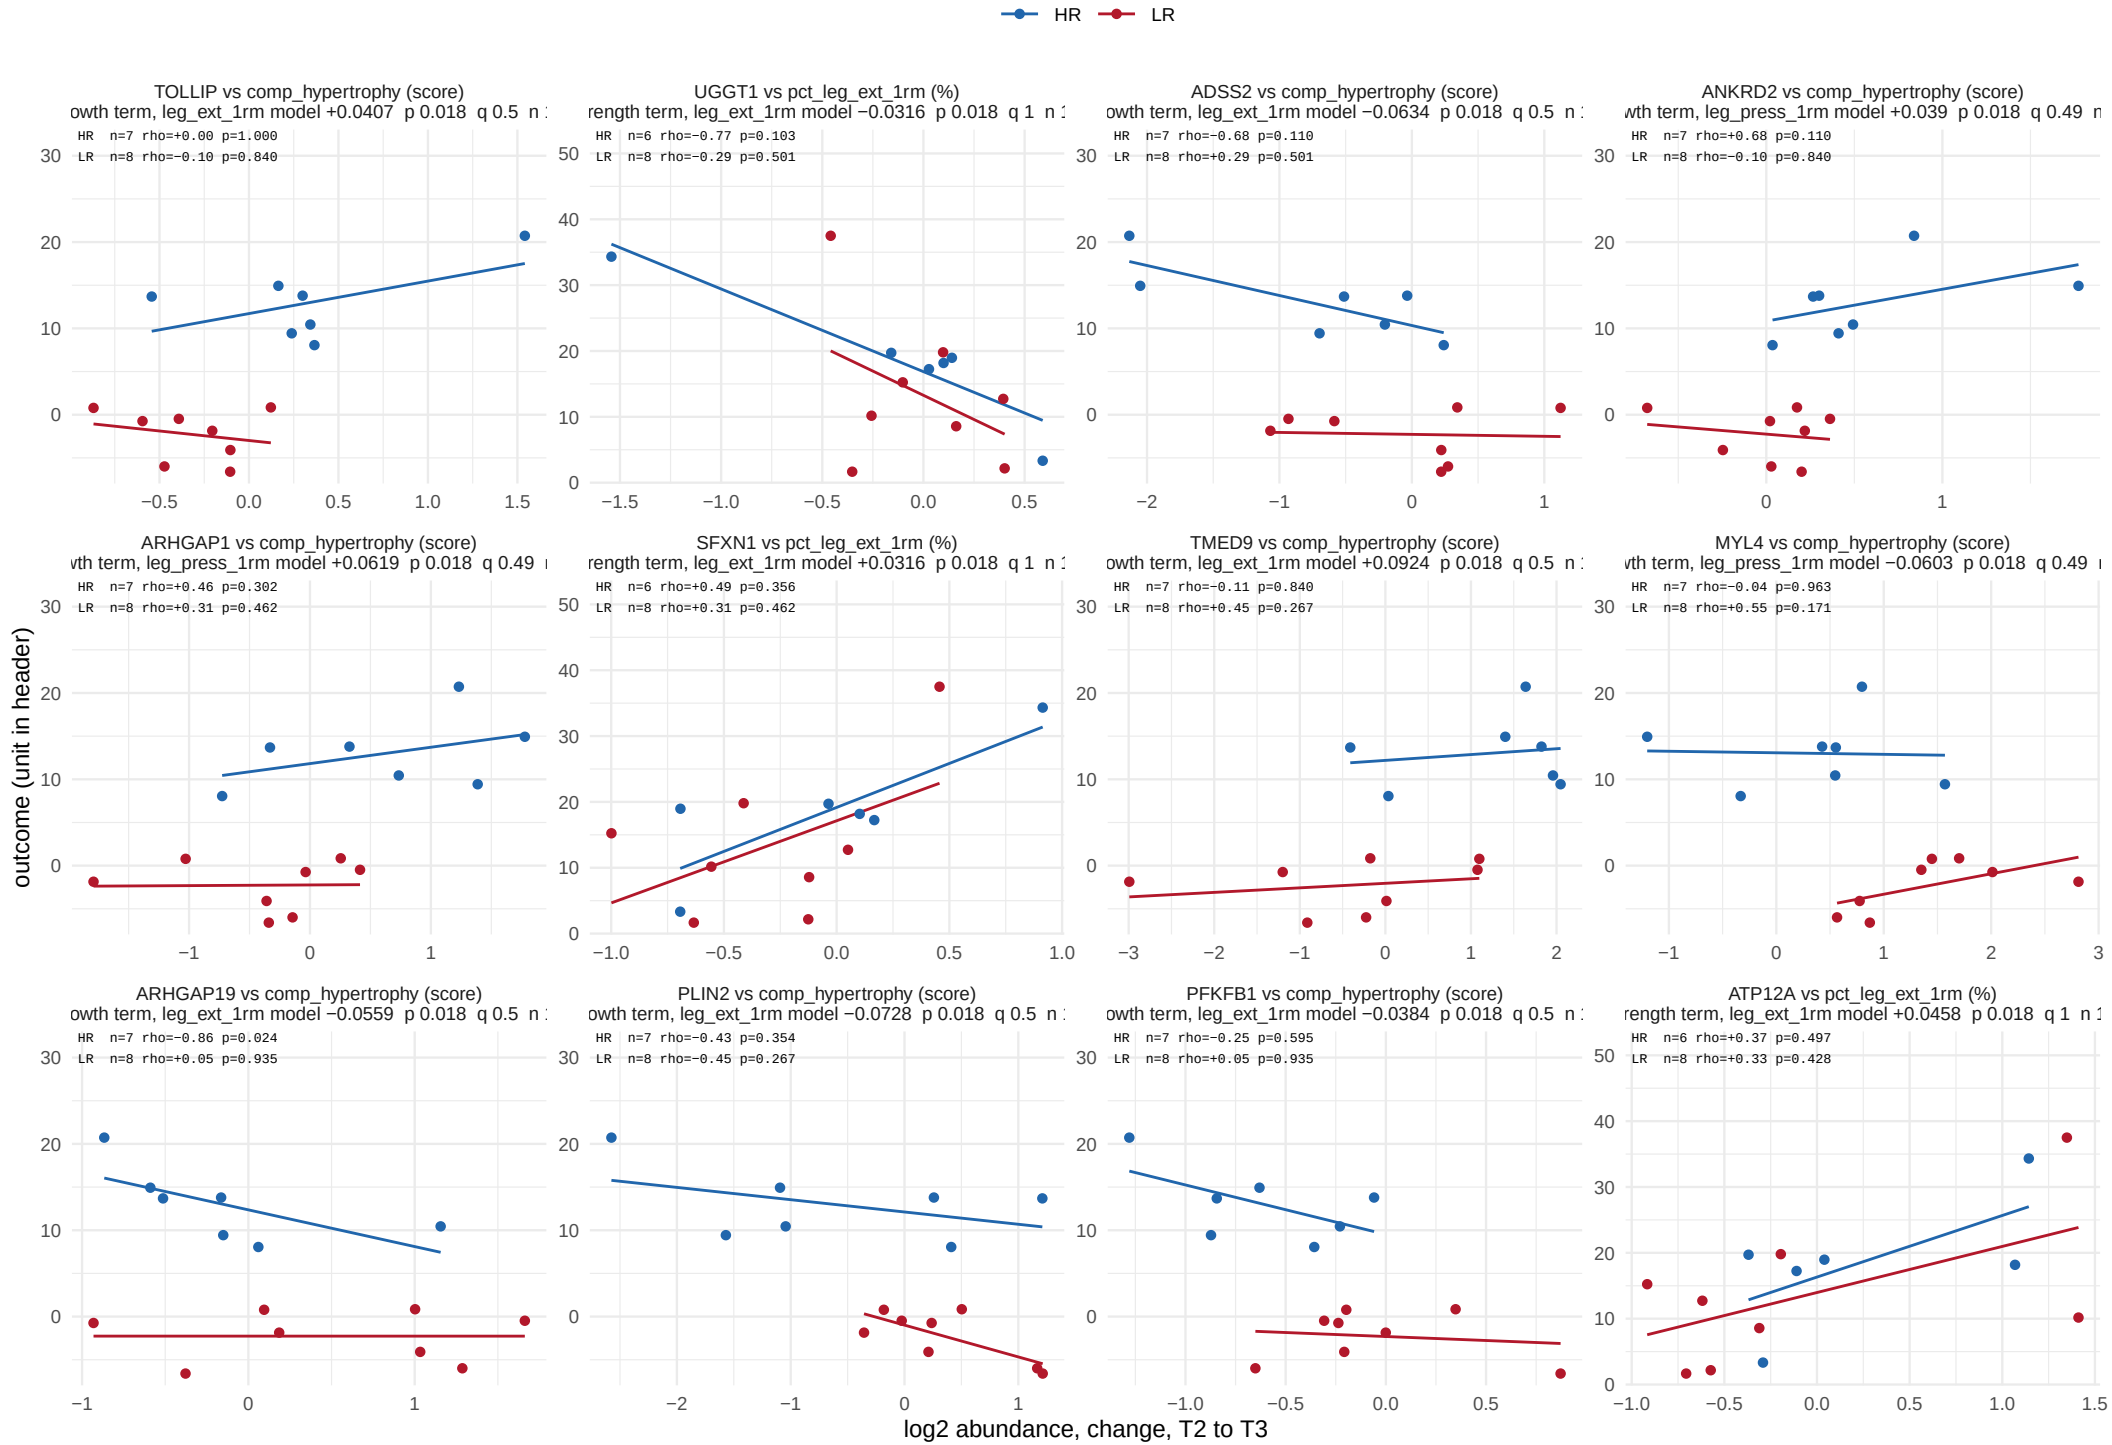

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, acute window


420 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 14 of 35.

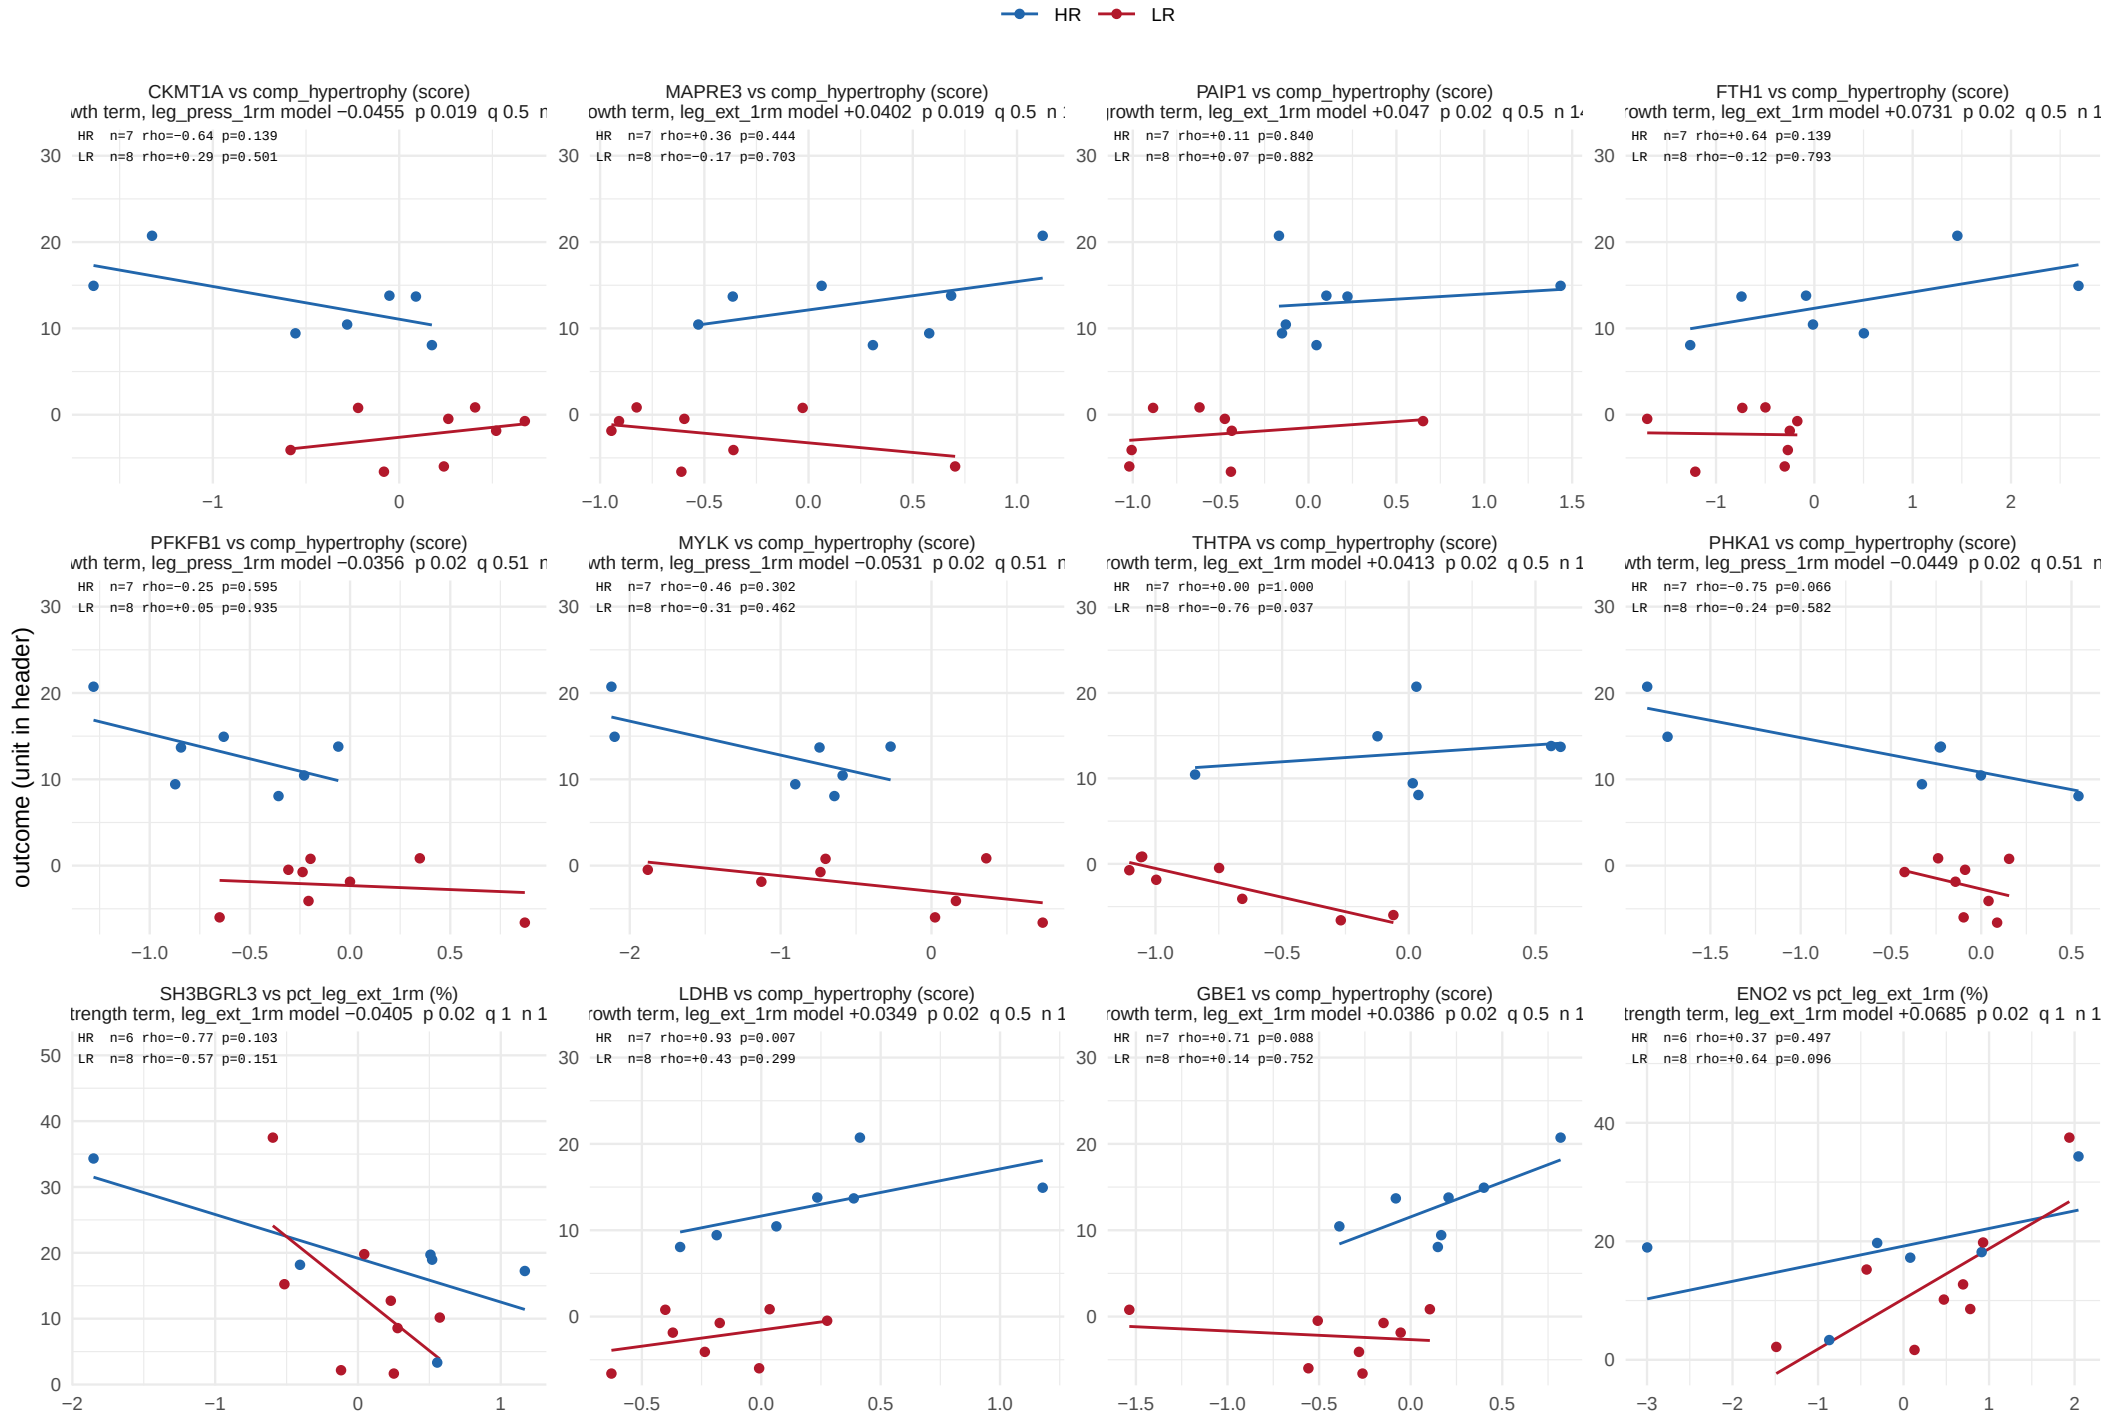

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, acute window


420 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 15 of 35.

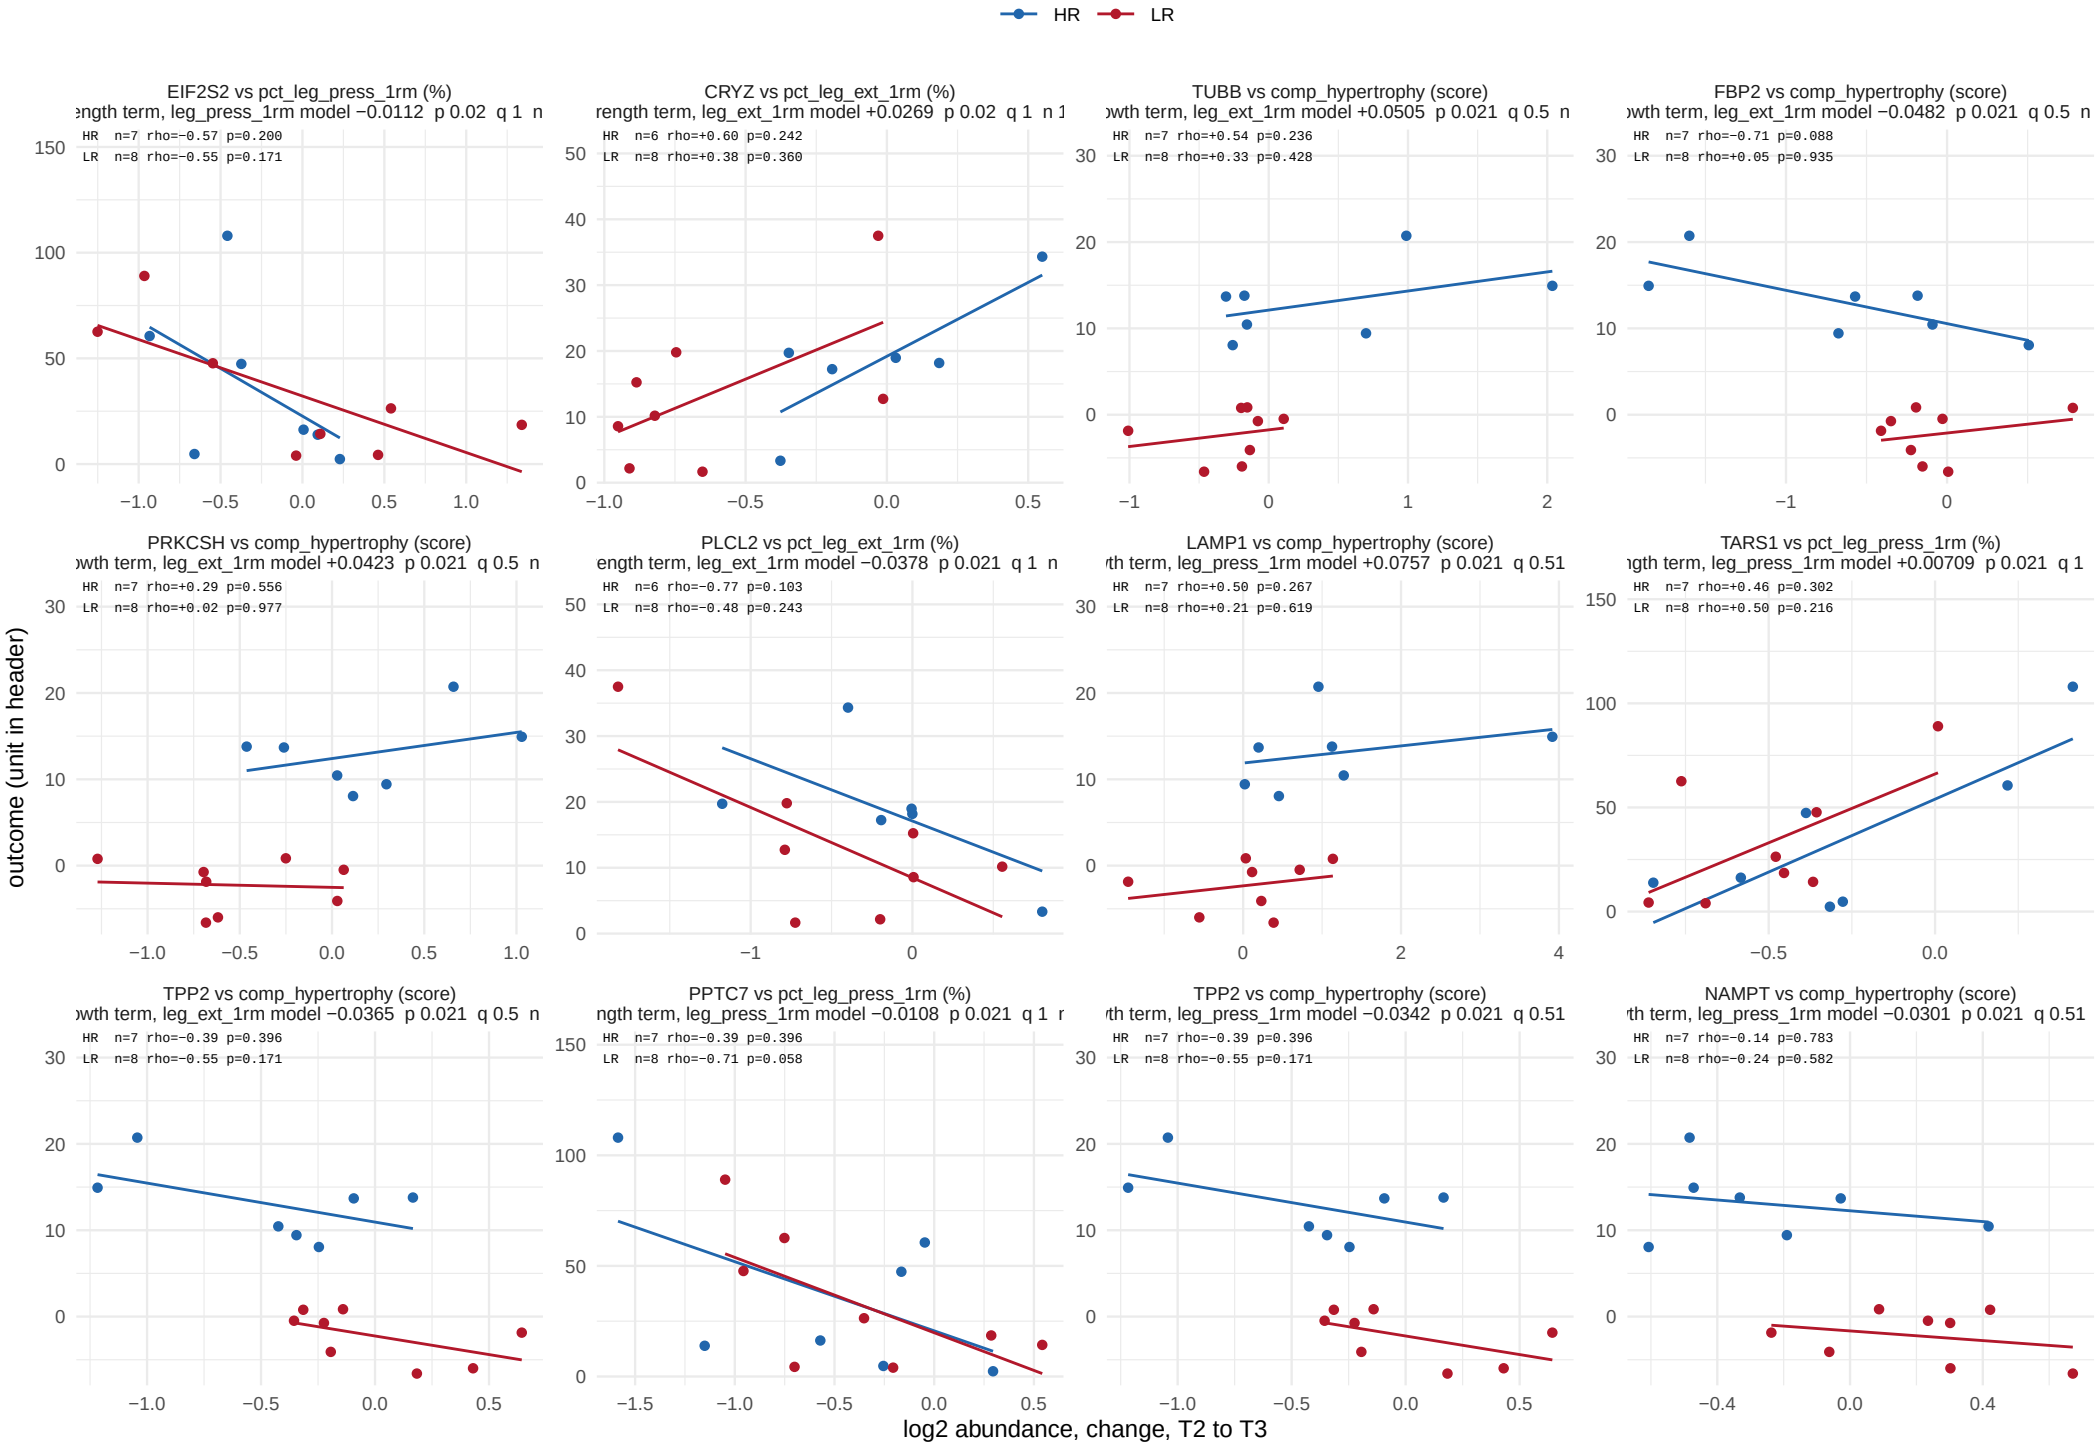

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, acute window


420 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 16 of 35.

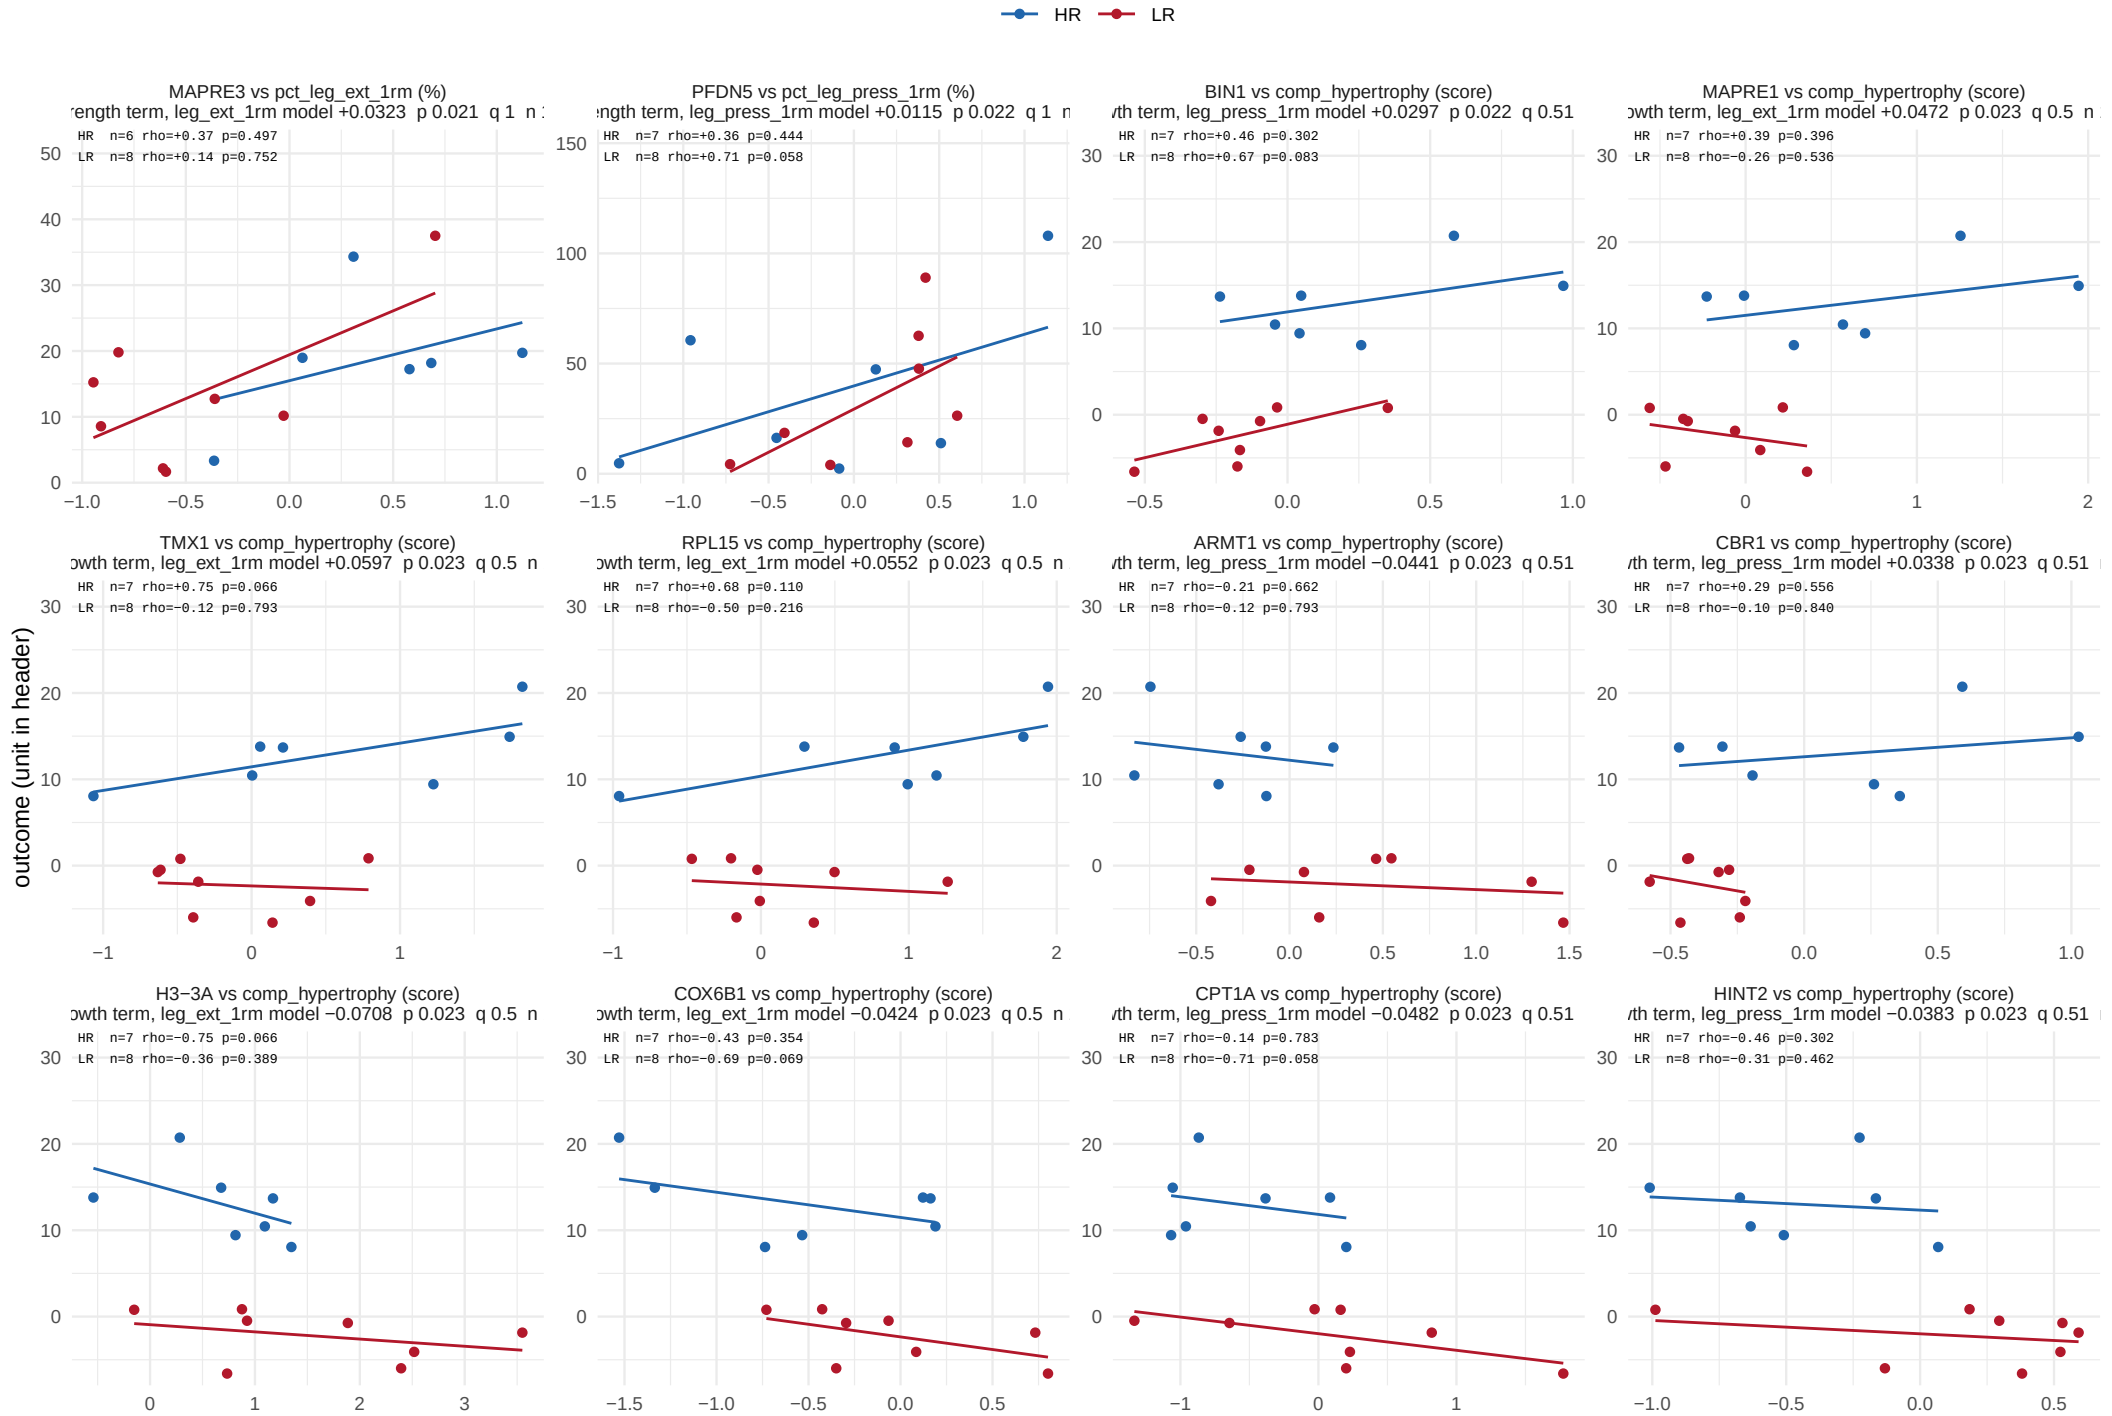

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, acute window


420 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 17 of 35.

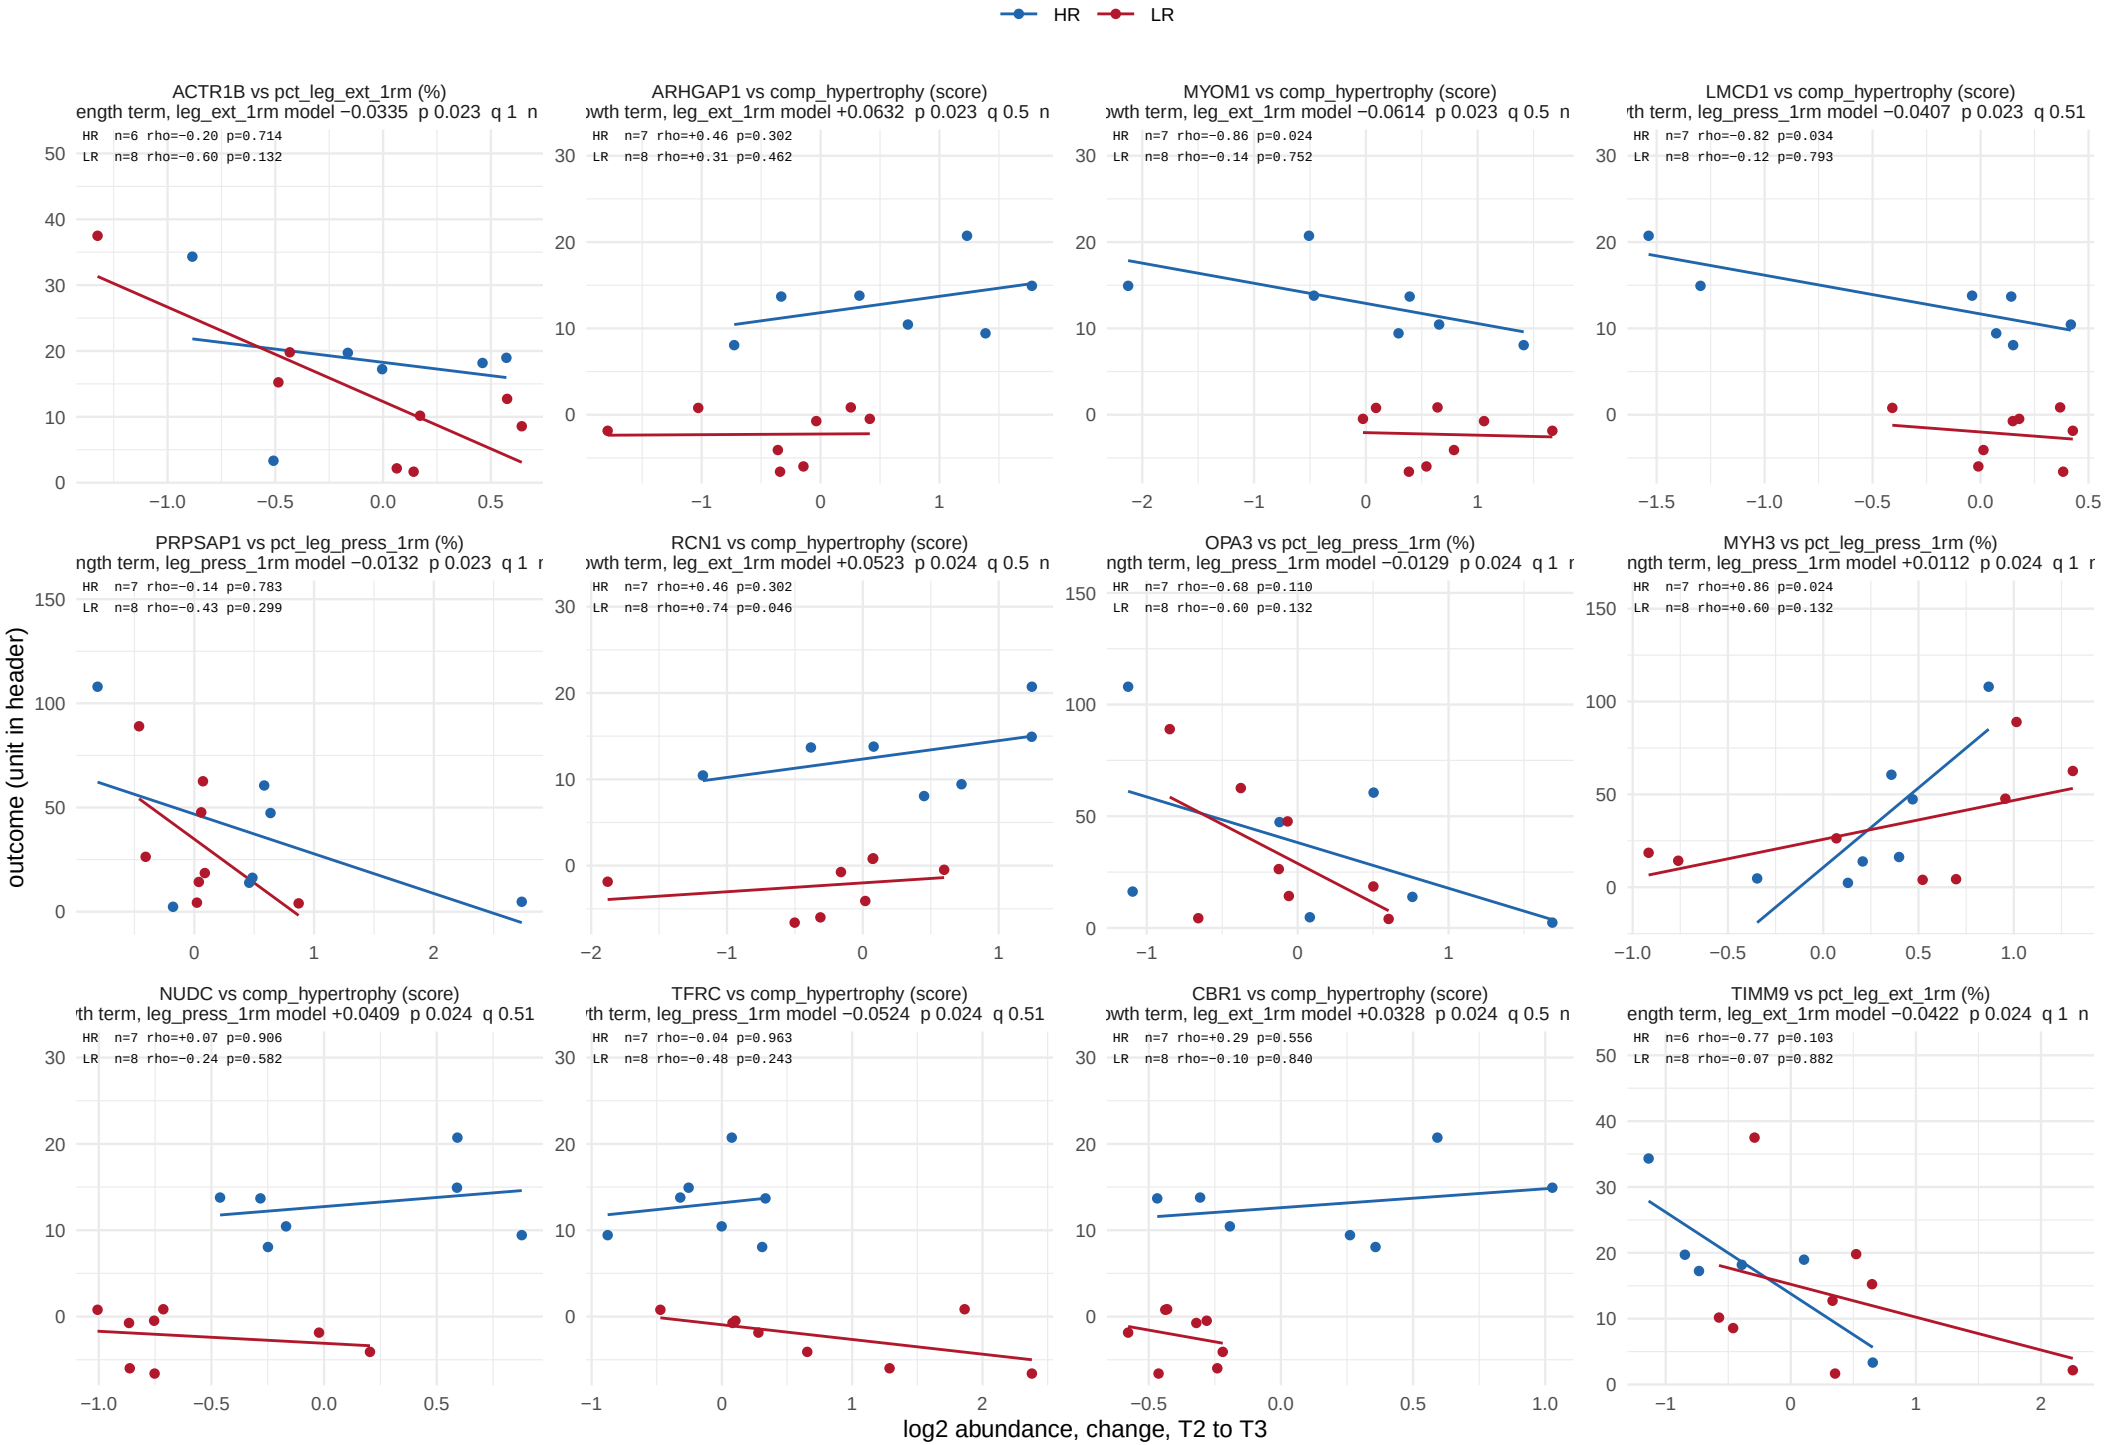

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, acute window


420 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 18 of 35.

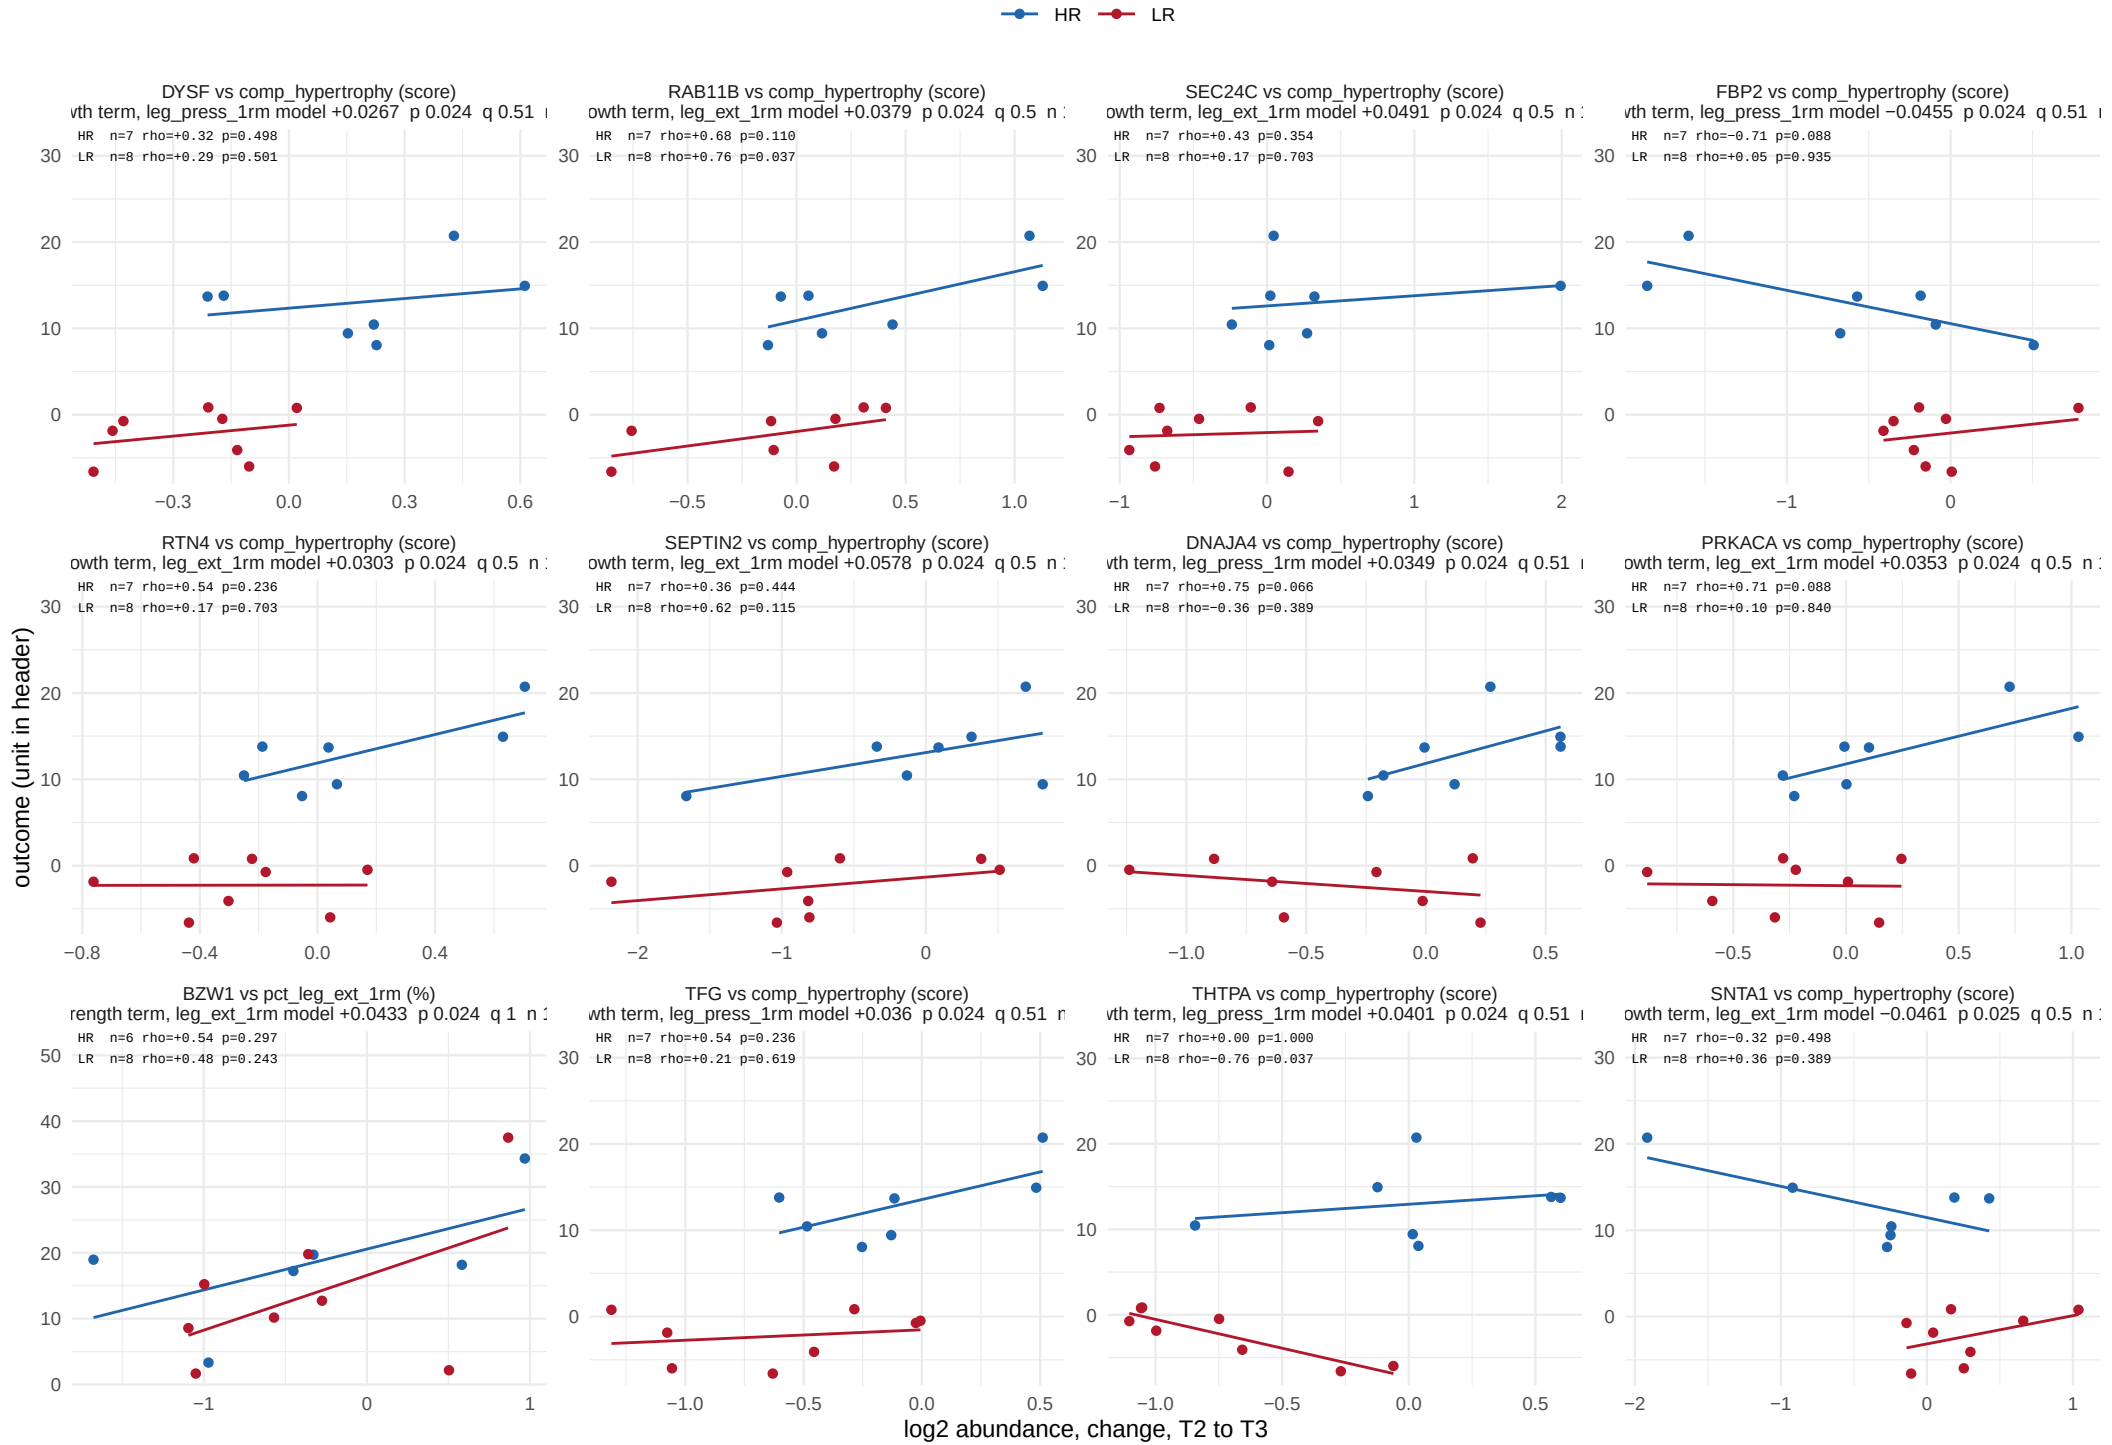

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, acute window


420 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 19 of 35.

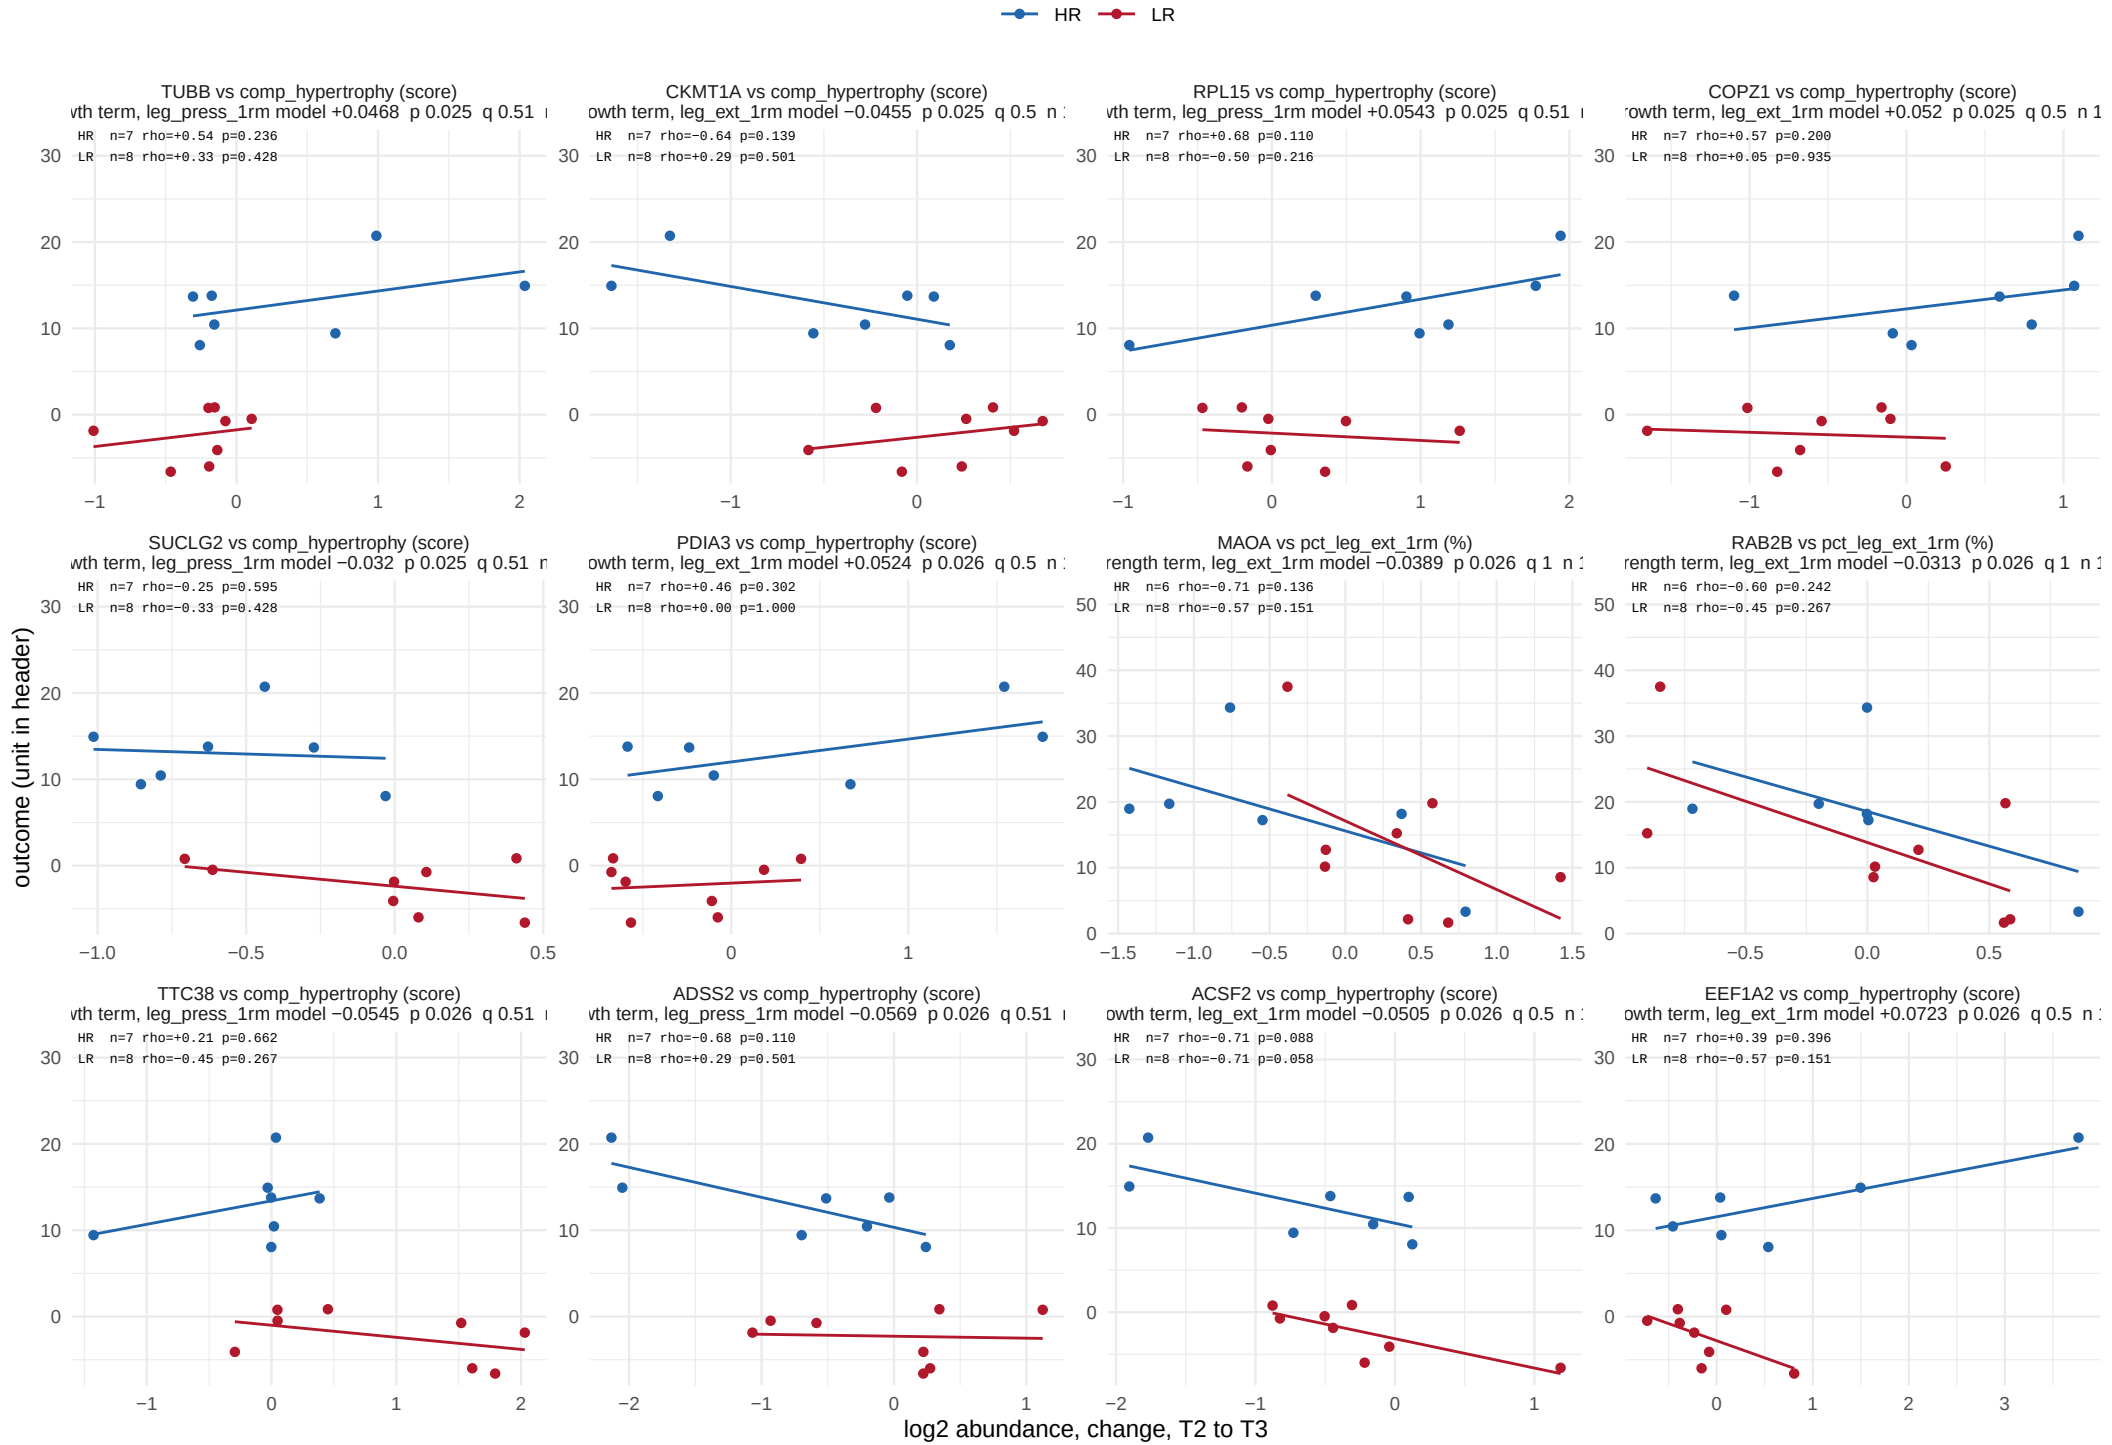

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, acute window


420 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 20 of 35.

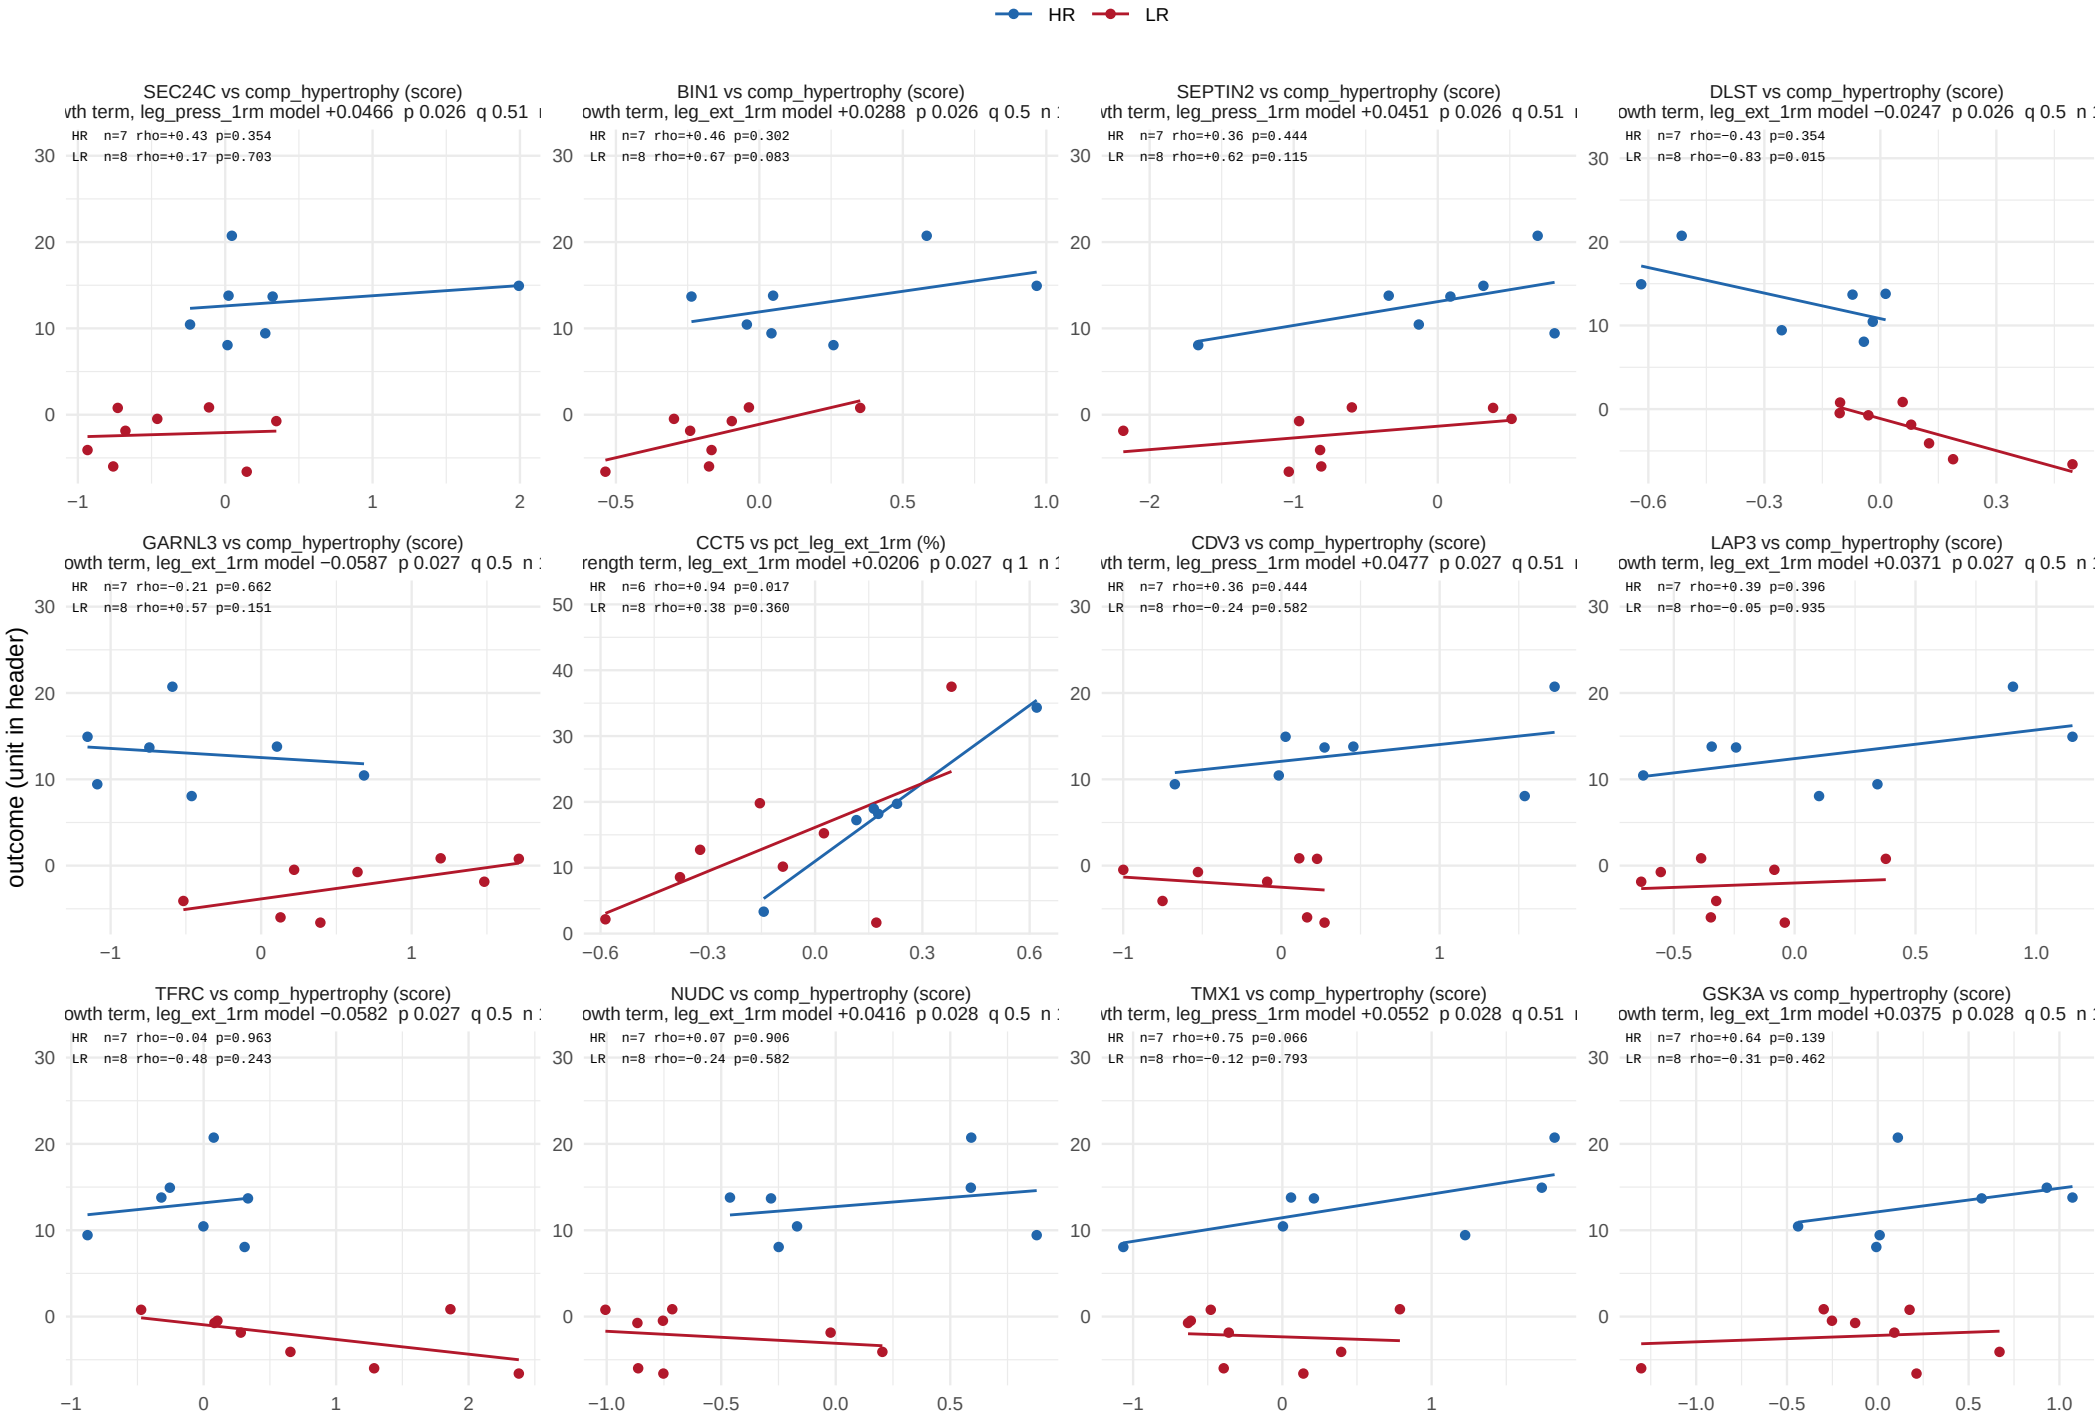

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, acute window


420 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 21 of 35.

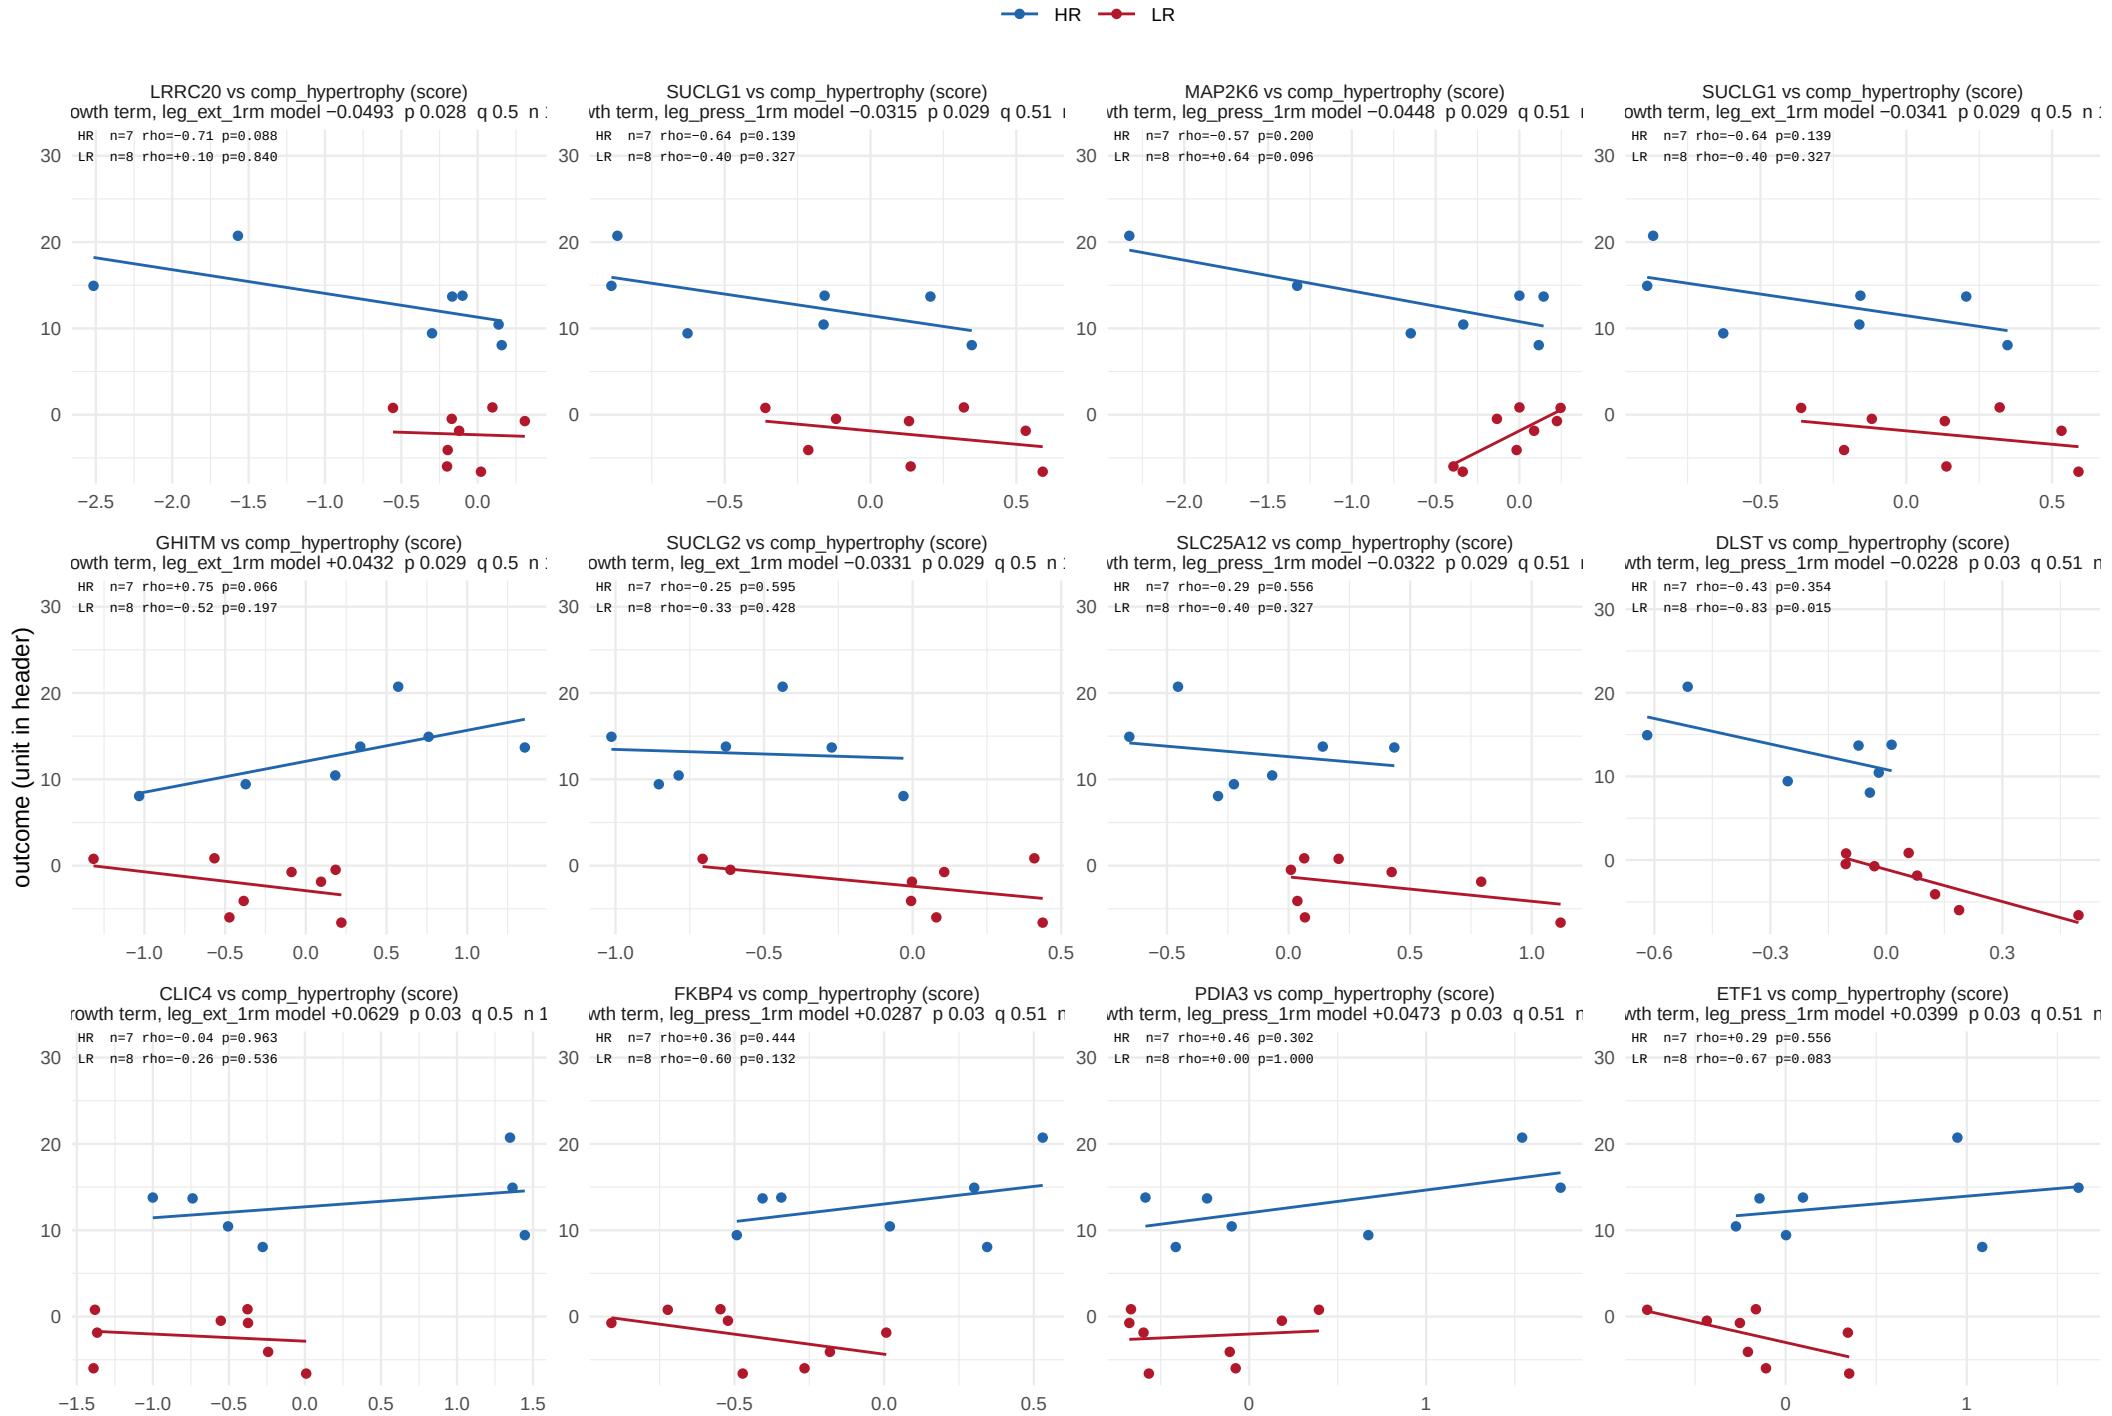

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, acute window


420 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 22 of 35.

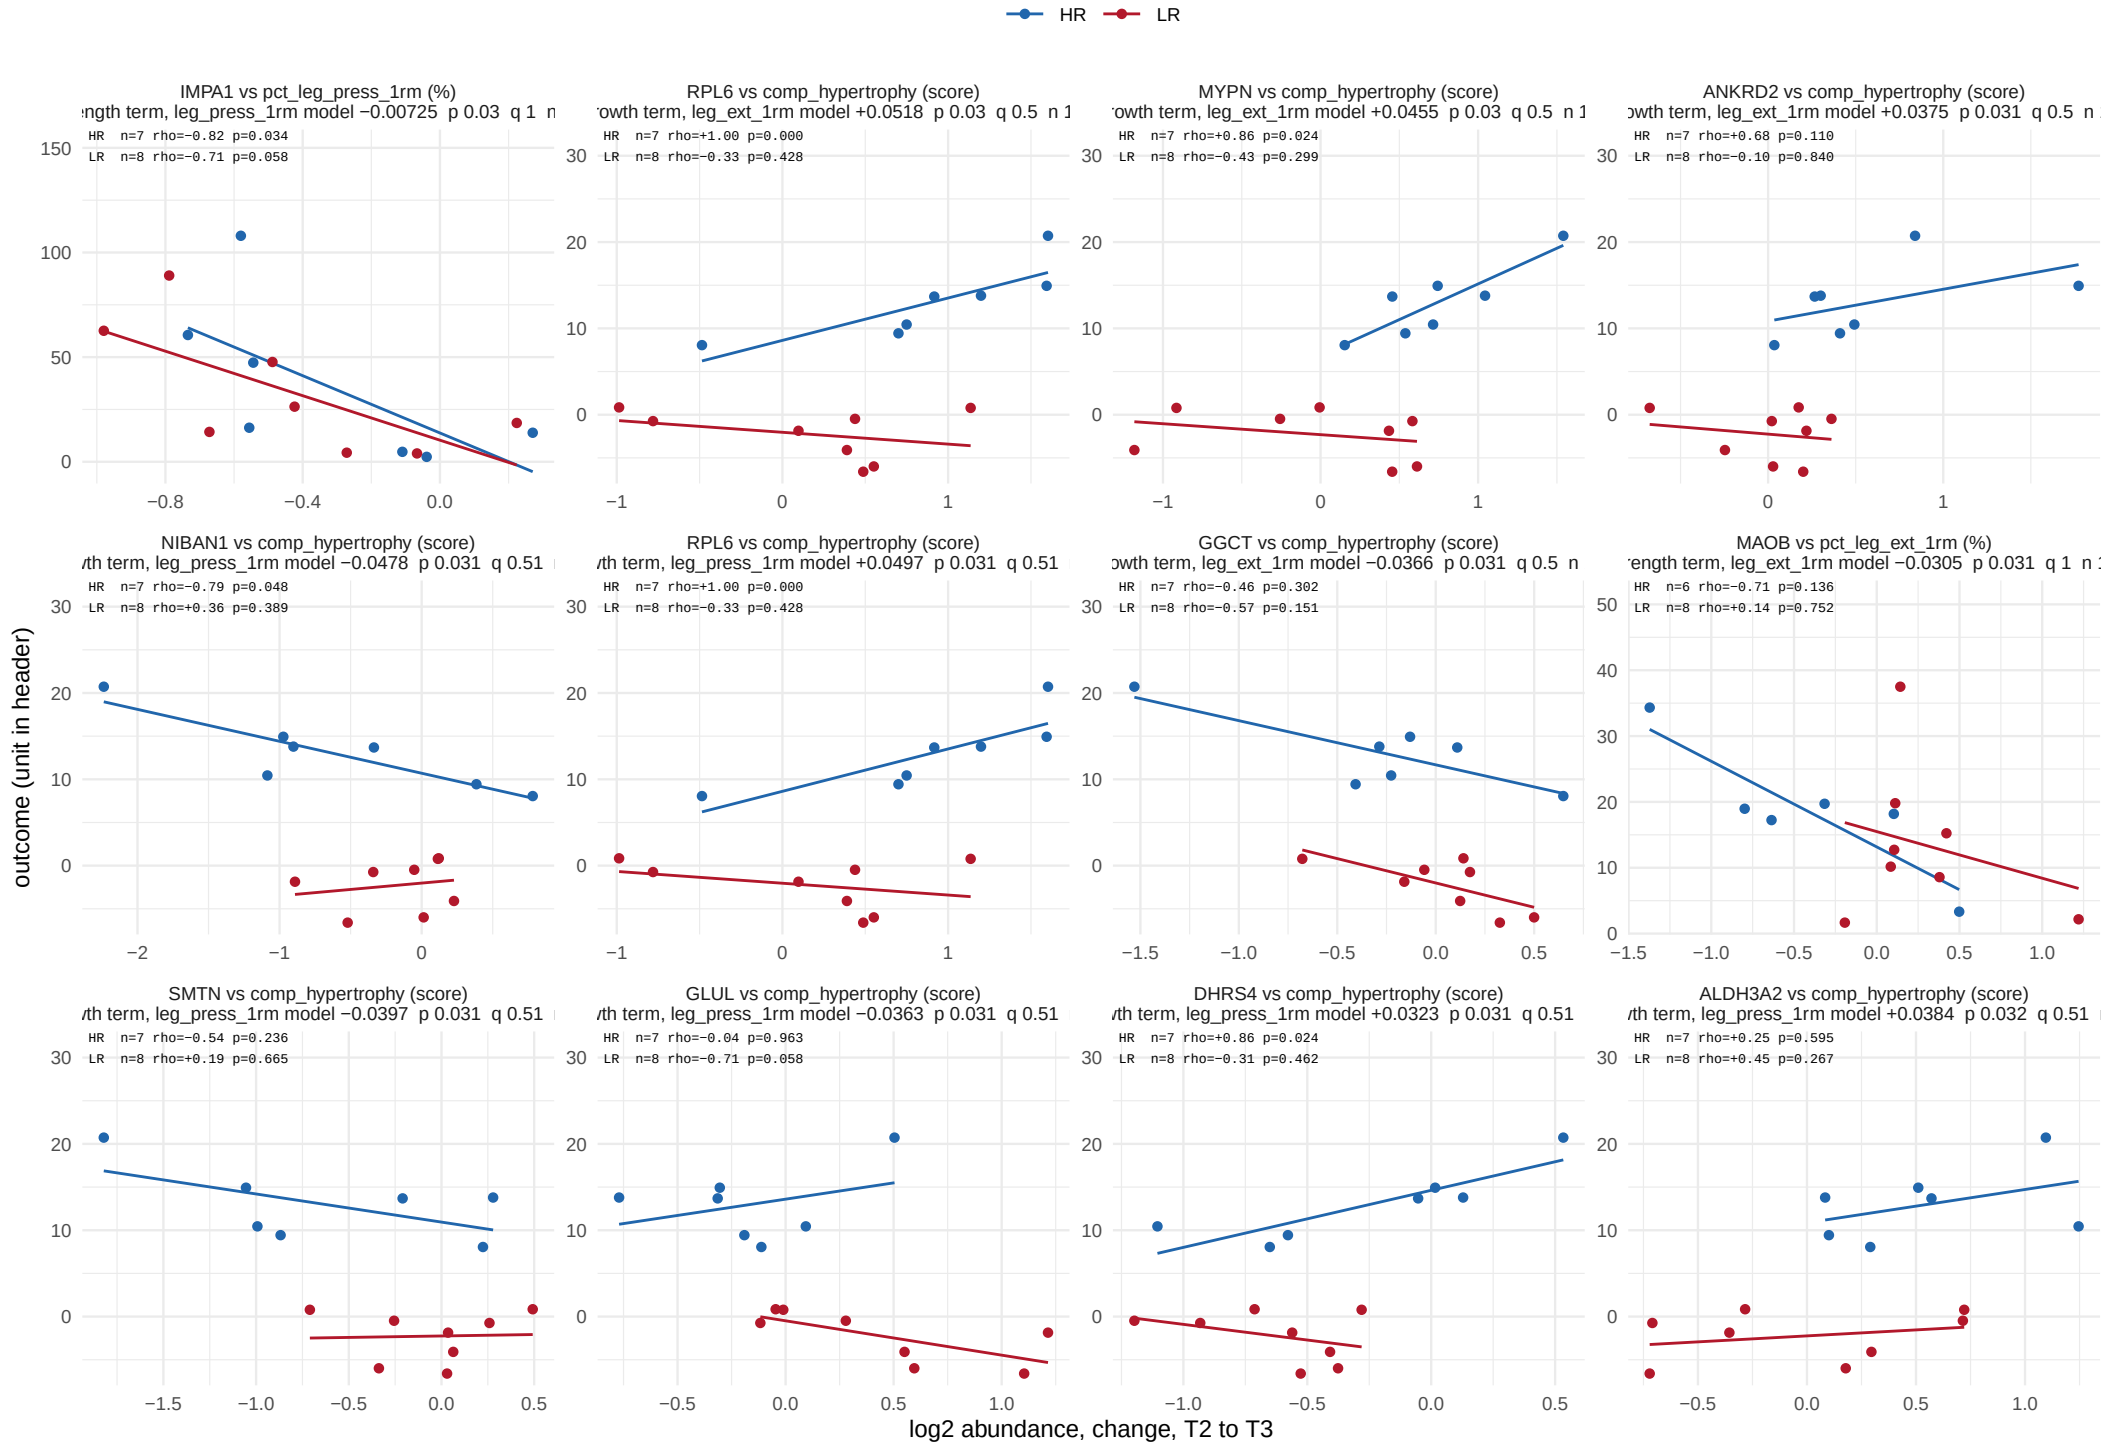

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, acute window


420 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 23 of 35.

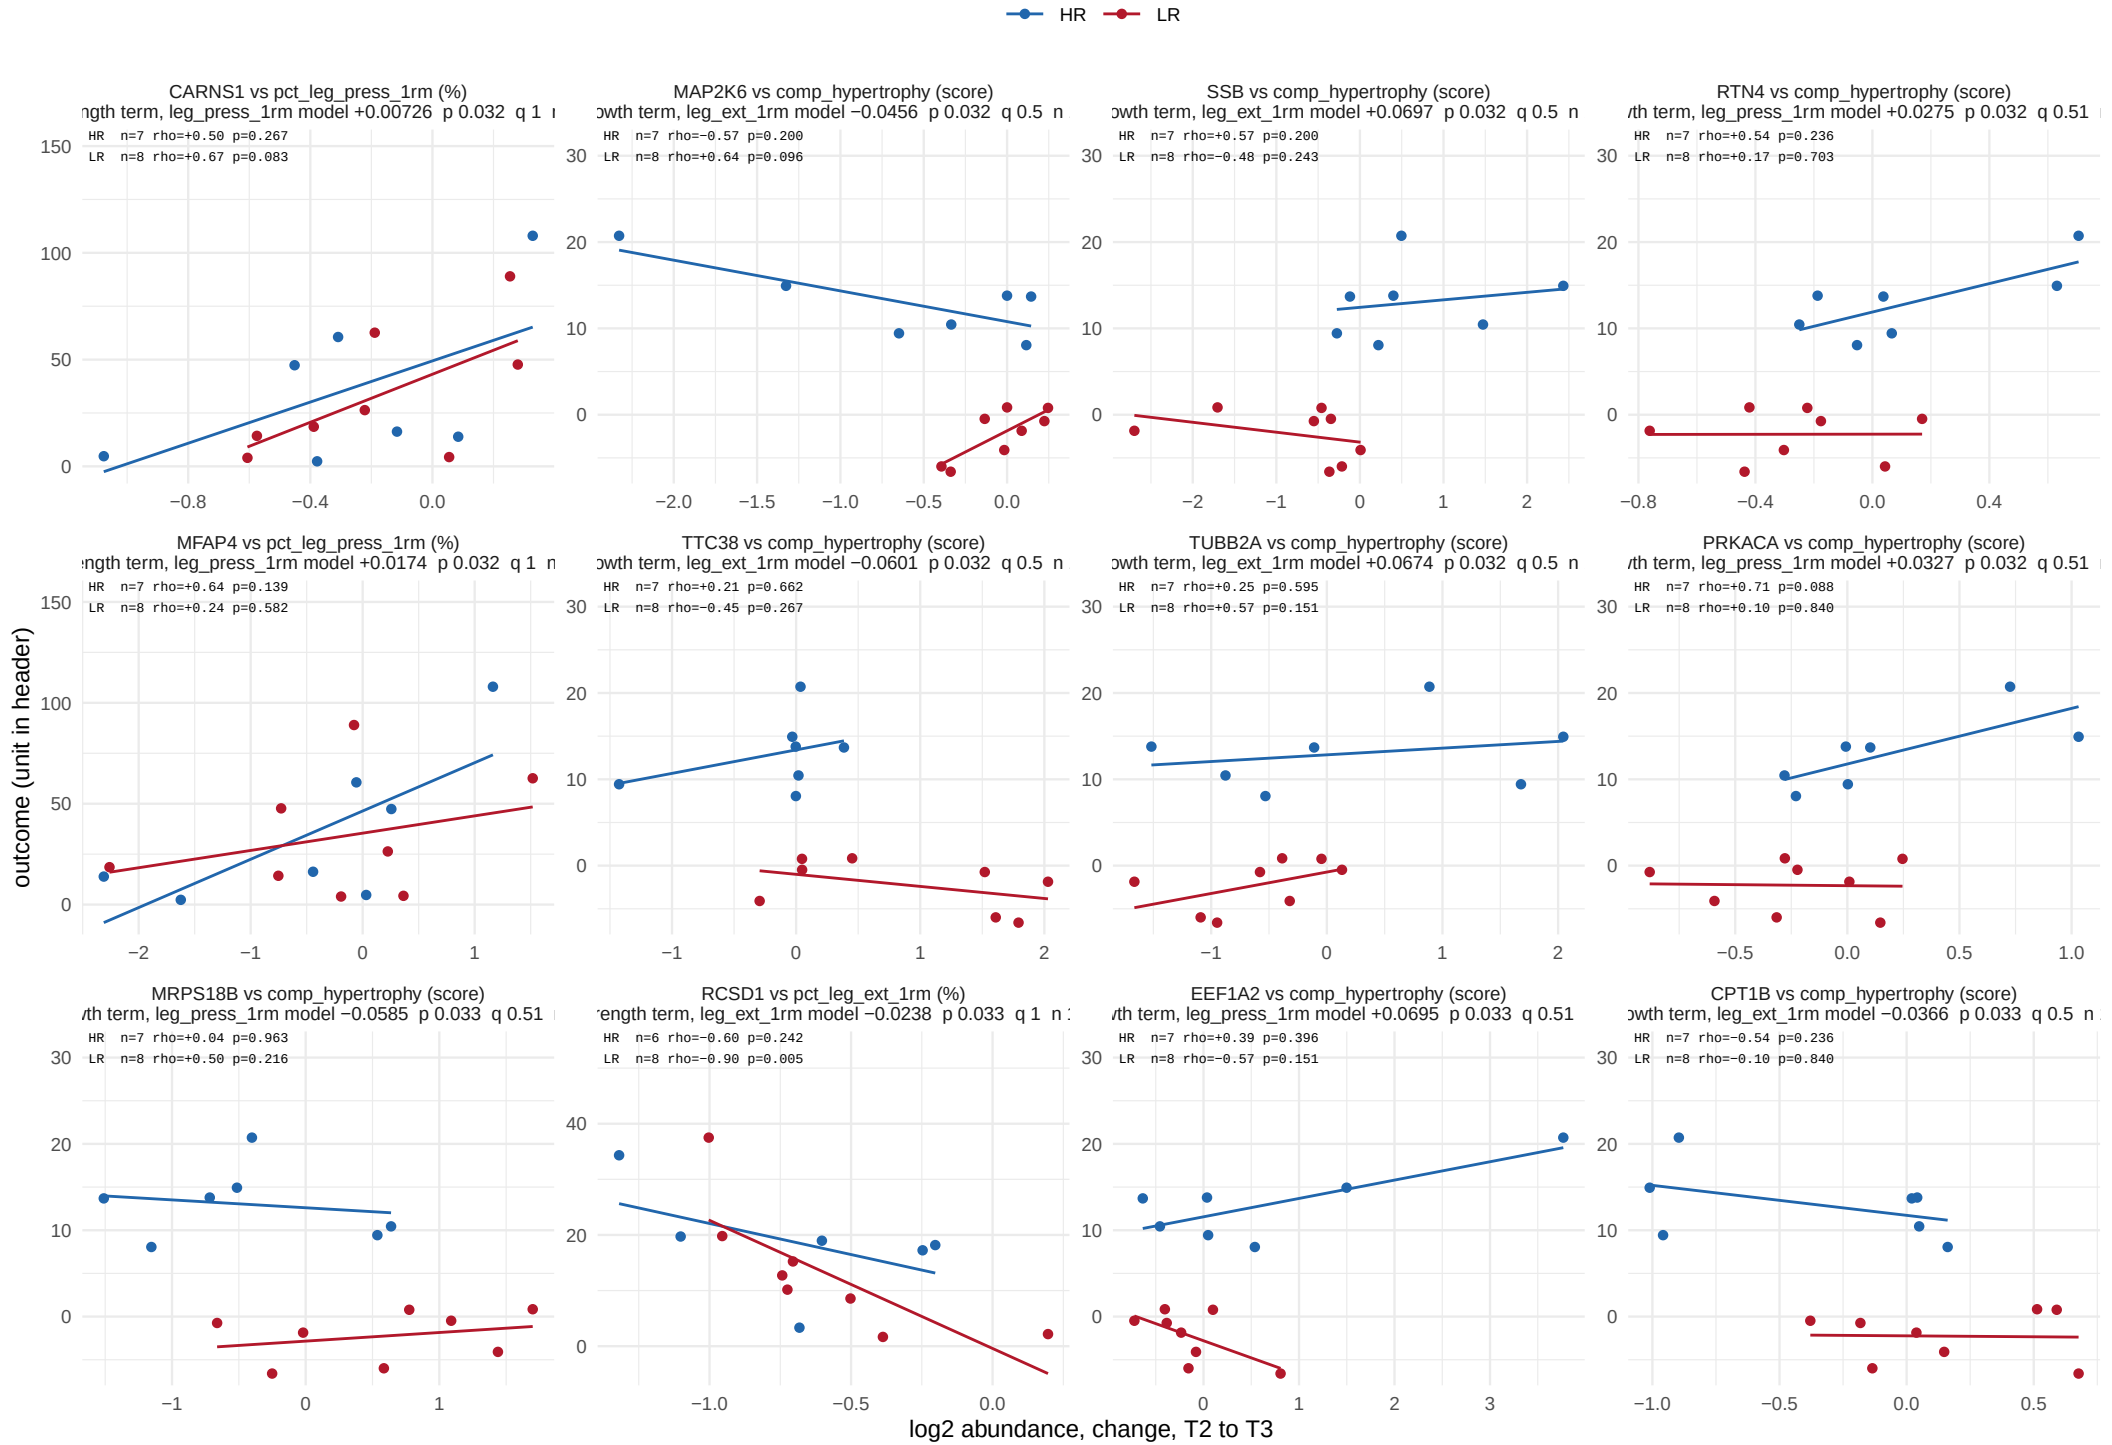

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, acute window


420 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 24 of 35.

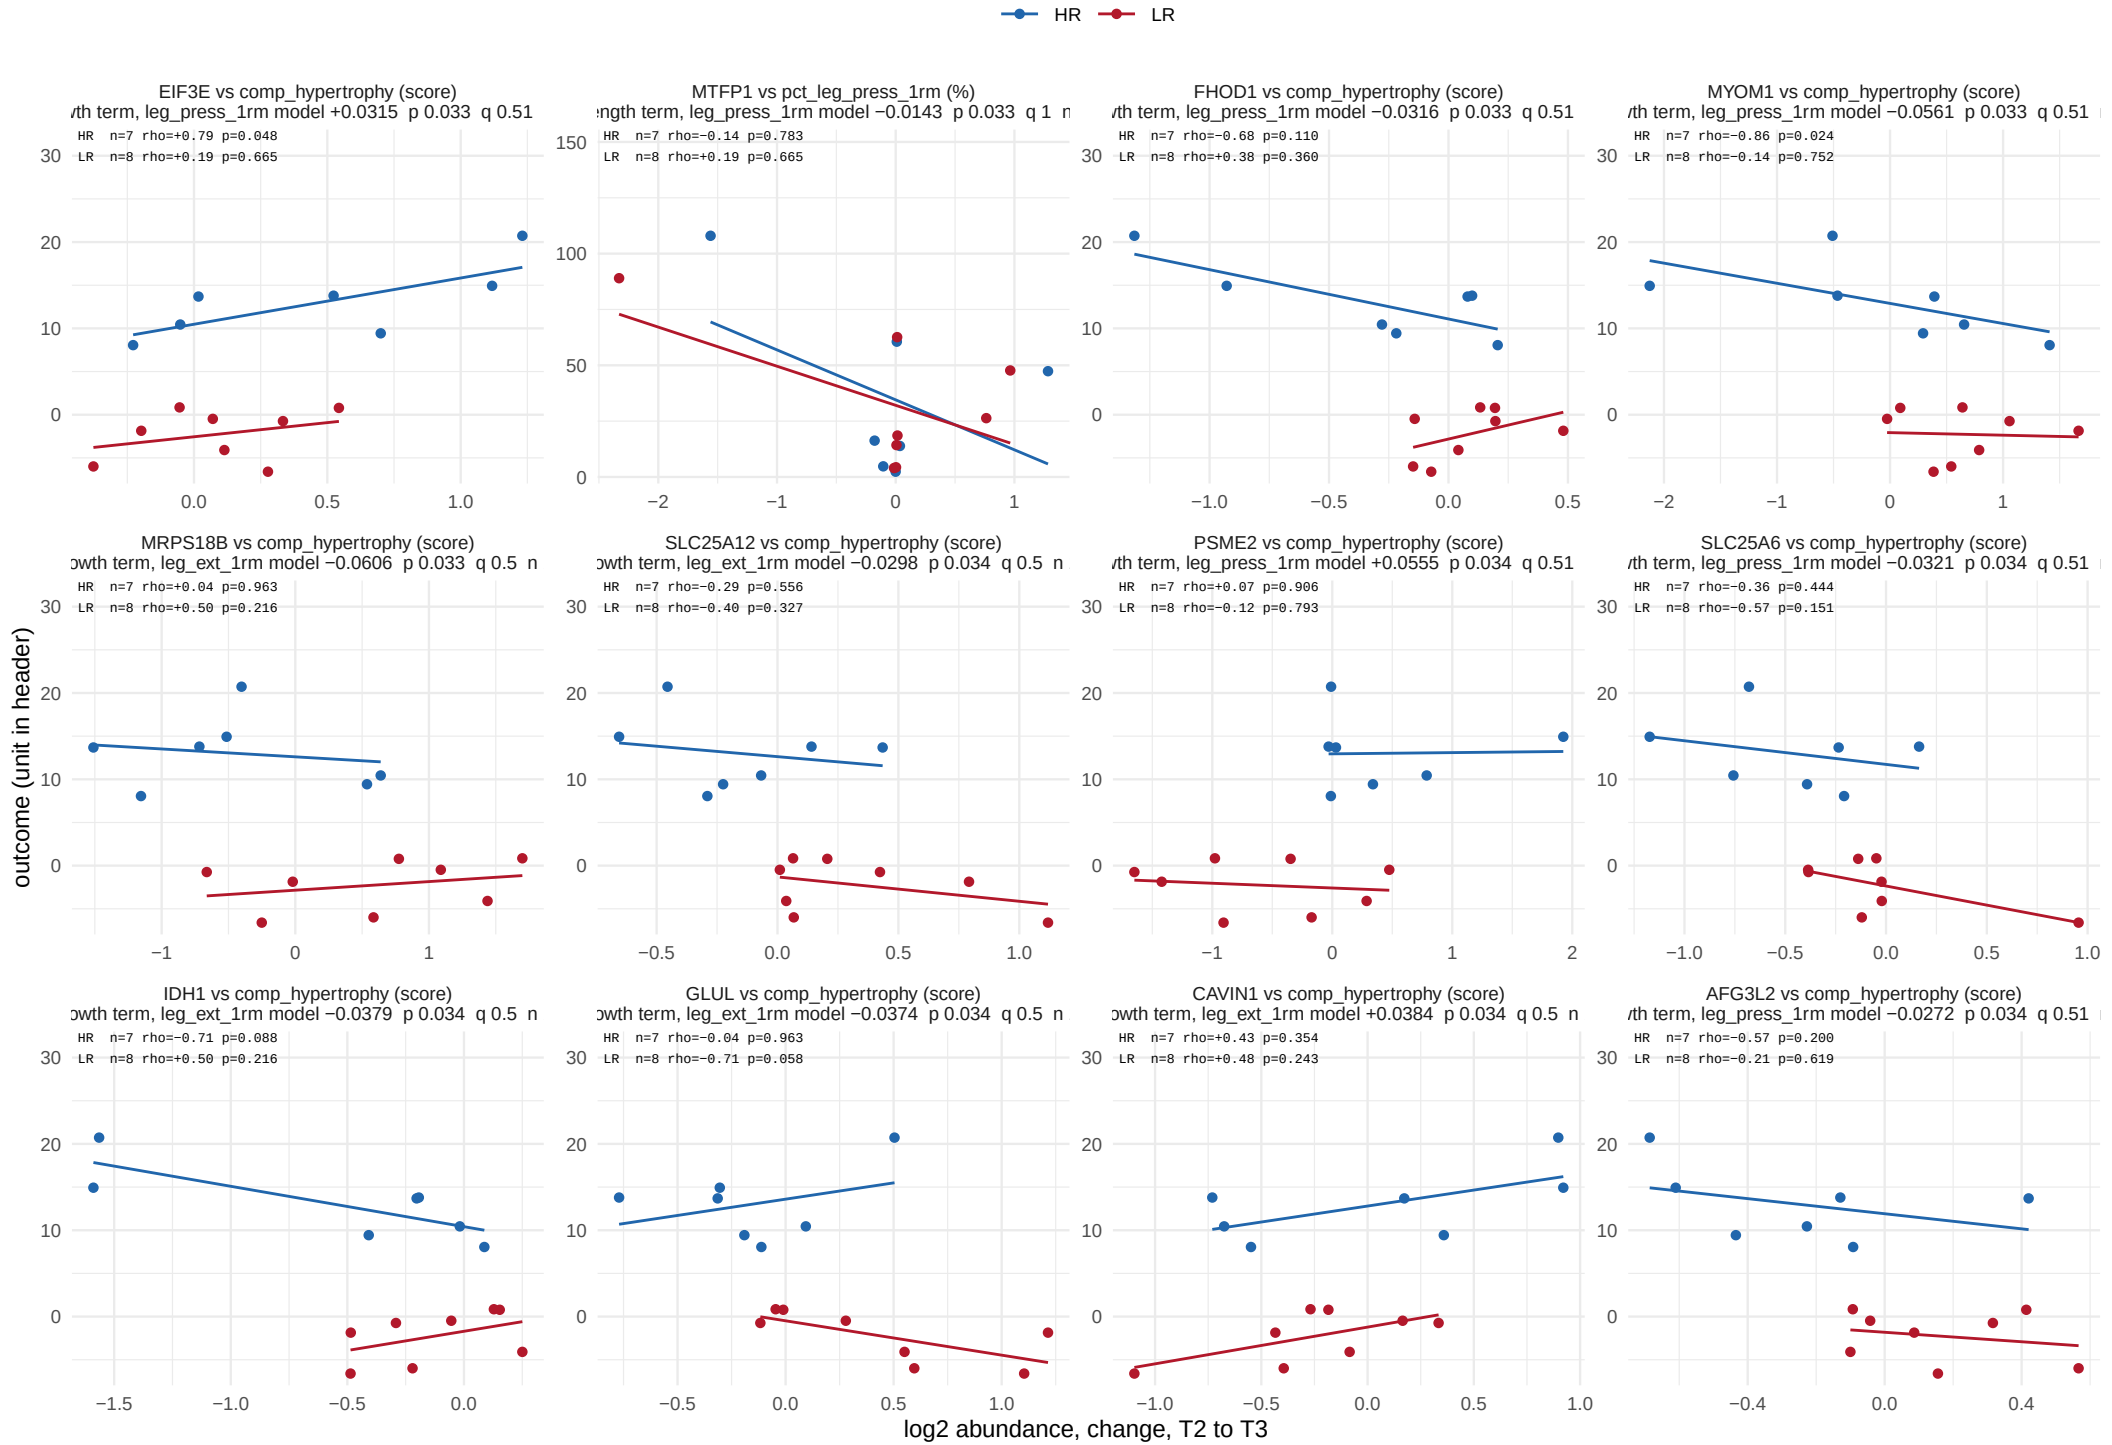

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.


Two predictor, acute window

420 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 25 of 35.

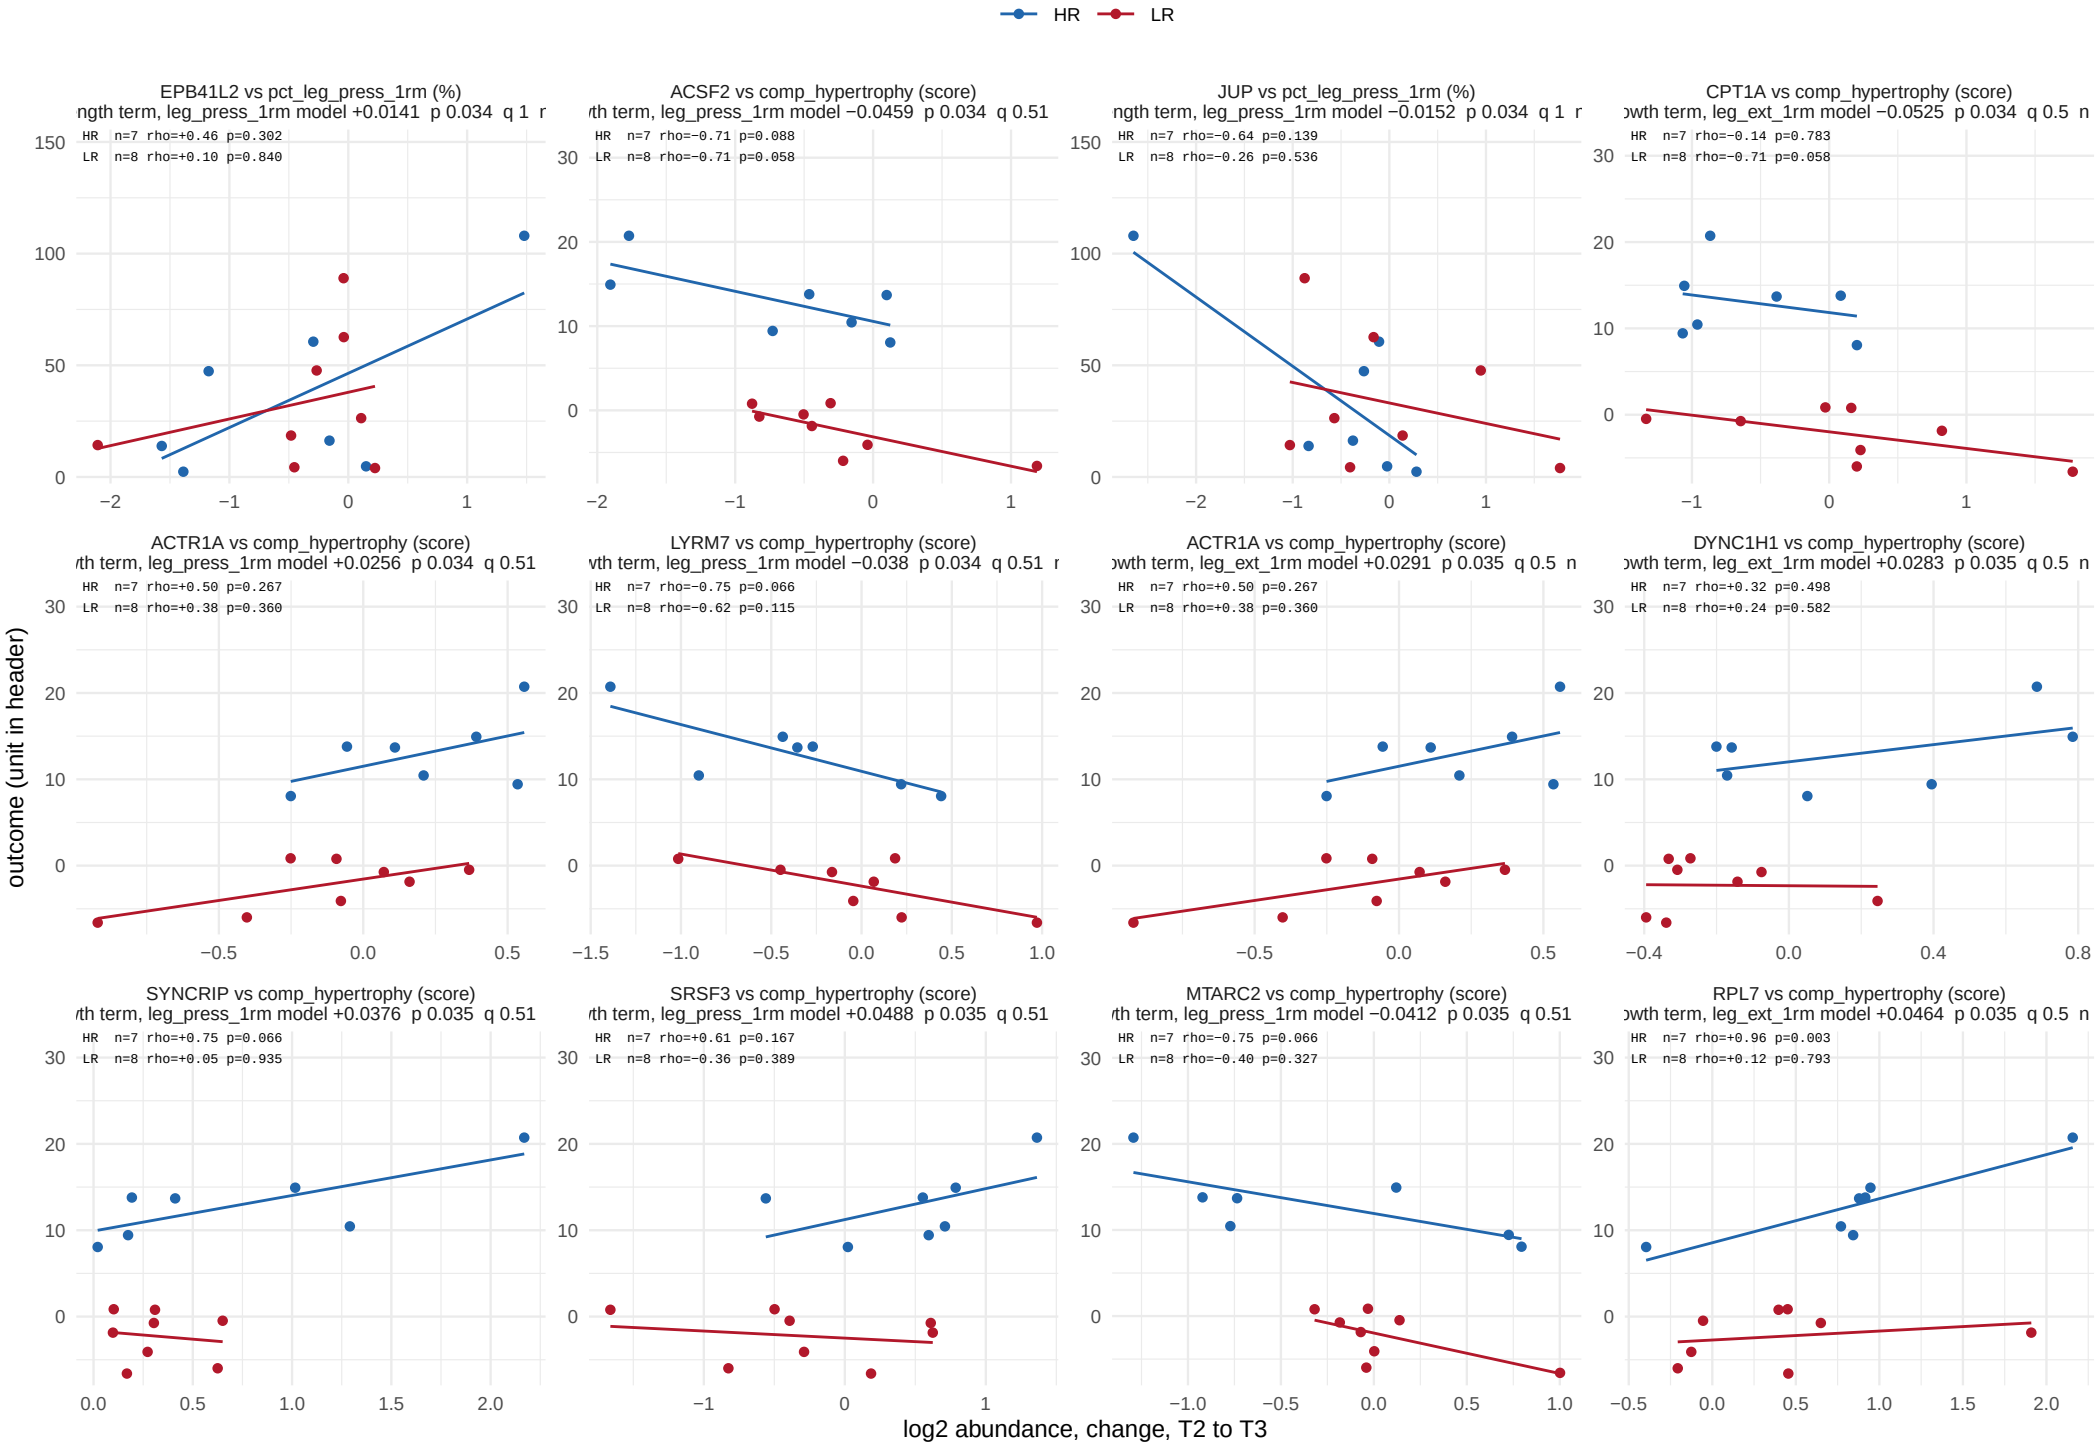

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.


Two predictor, acute window

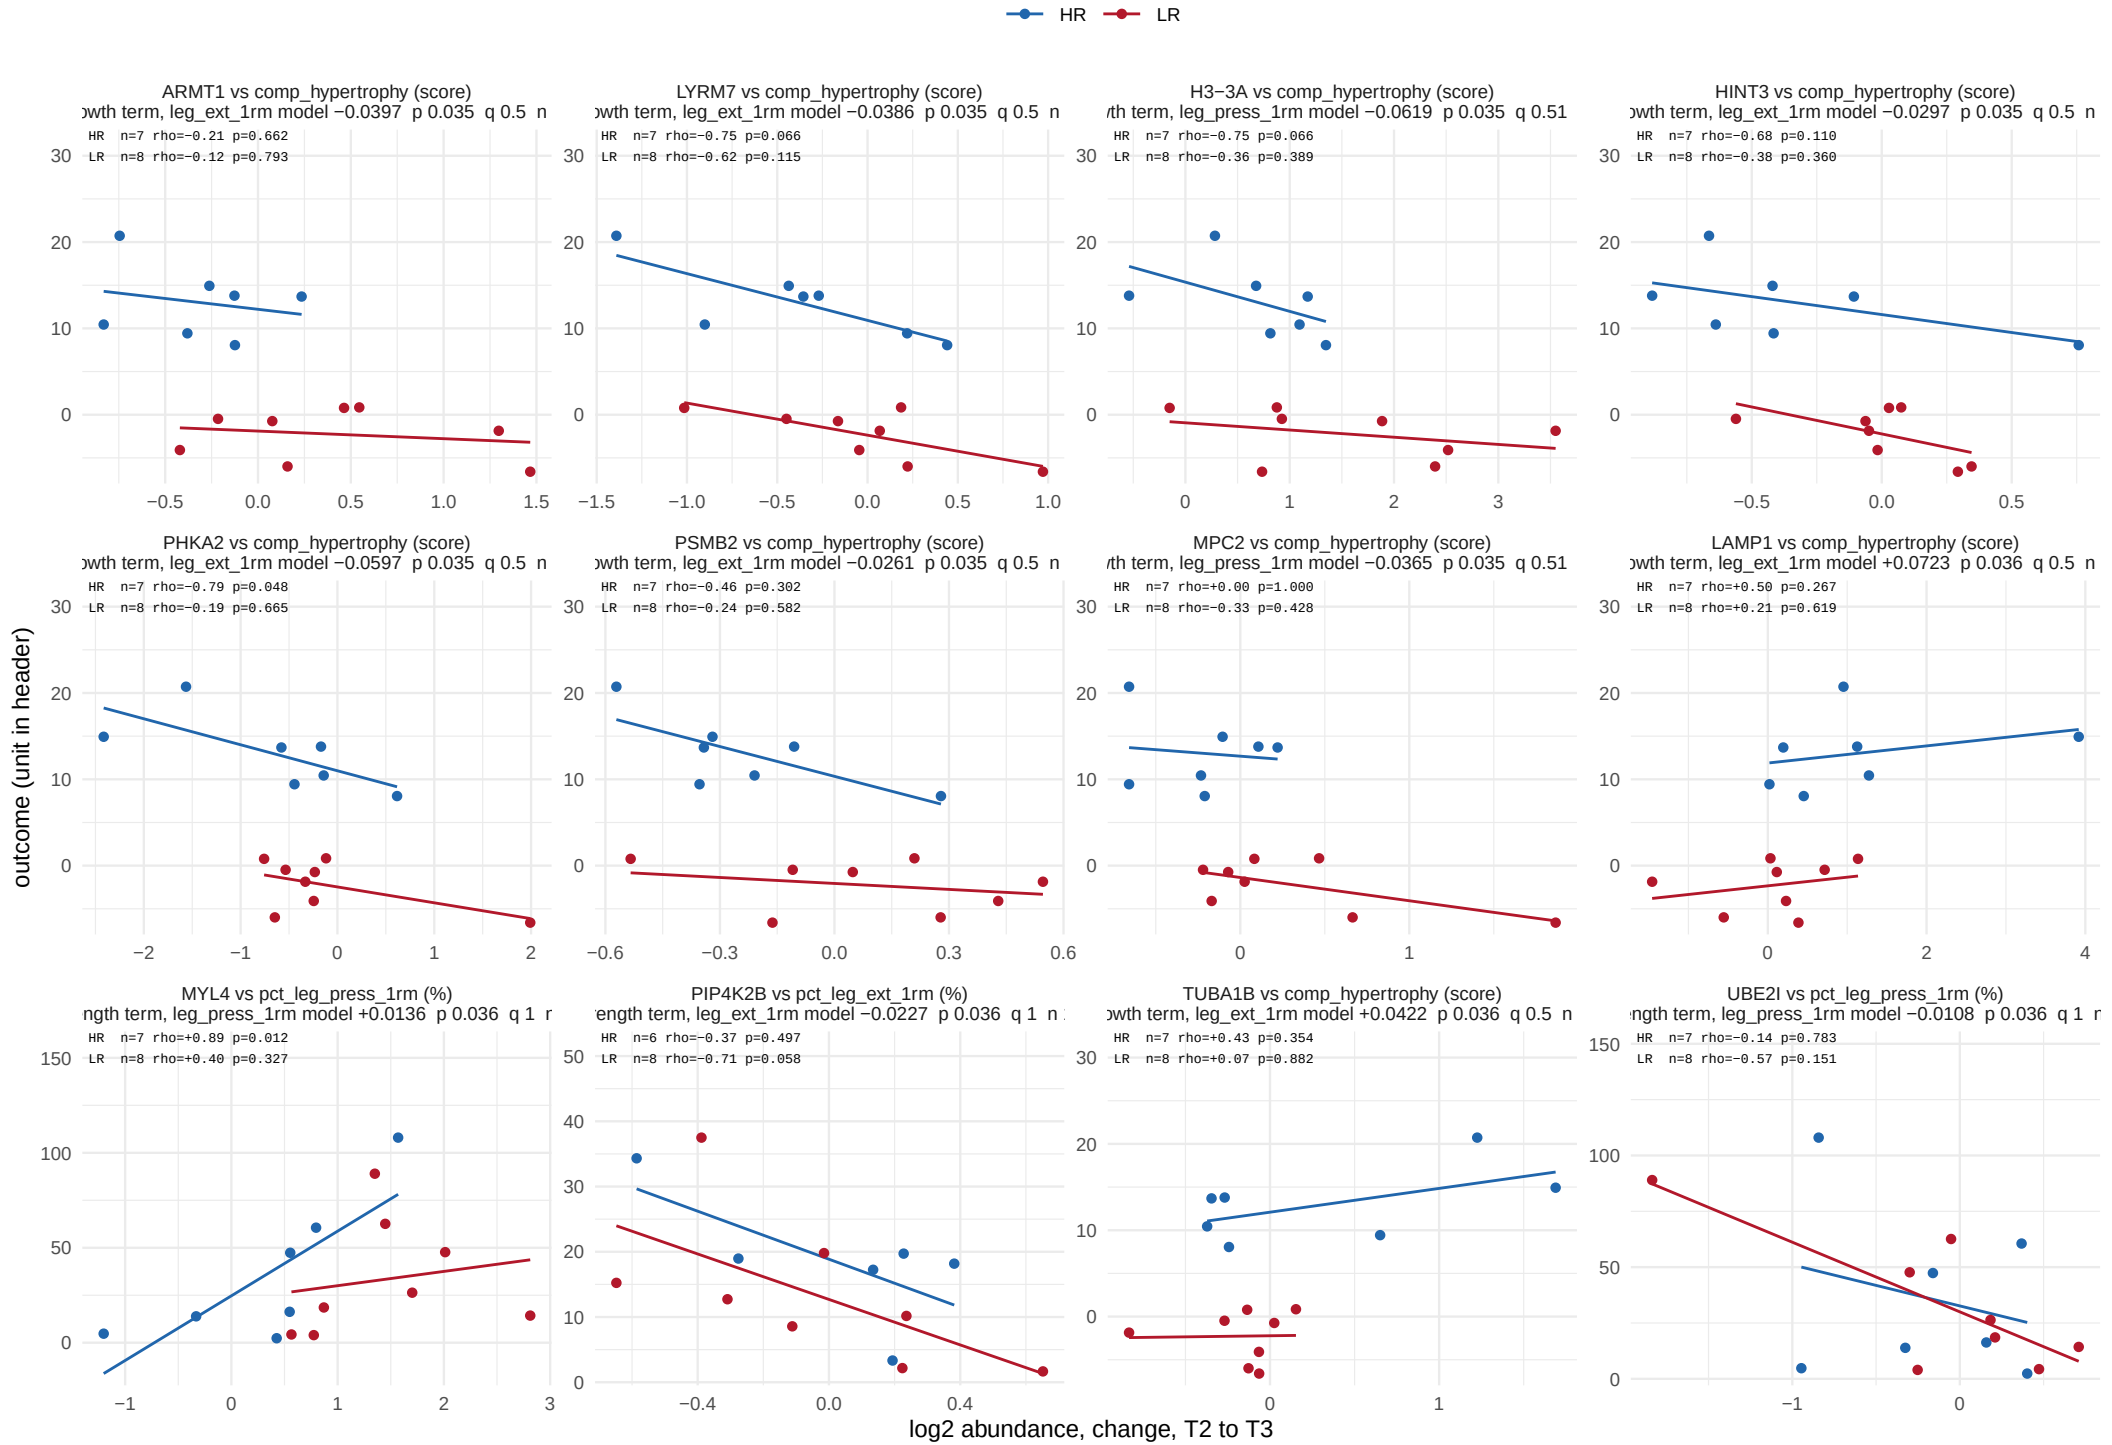

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, acute window


420 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 27 of 35.

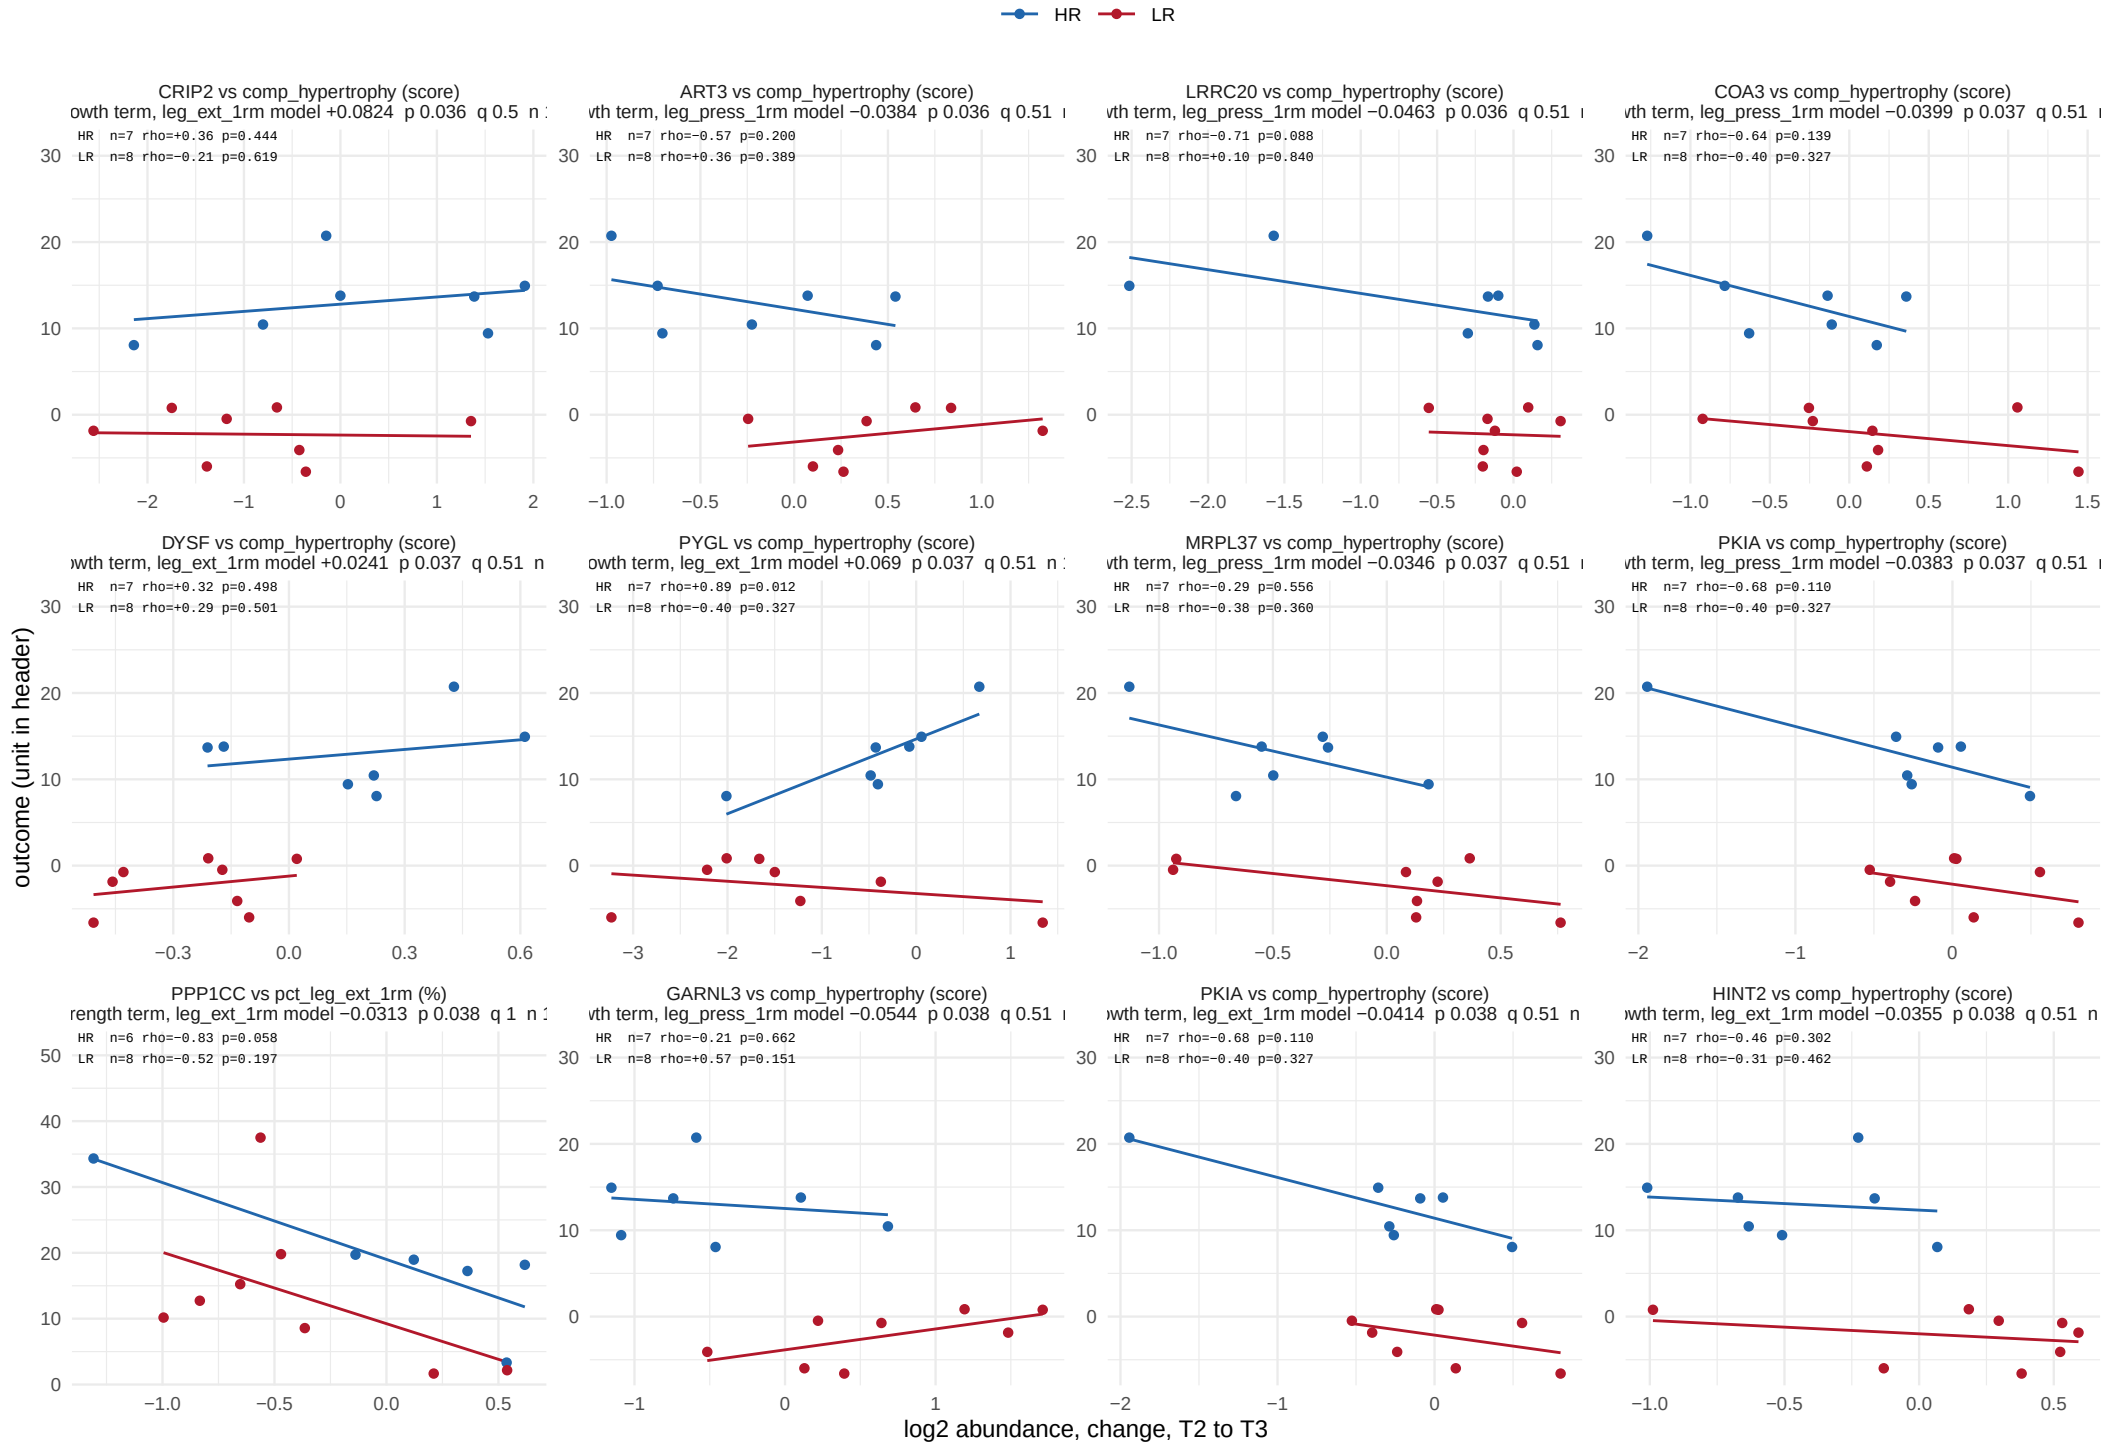

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, acute window


420 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 28 of 35.

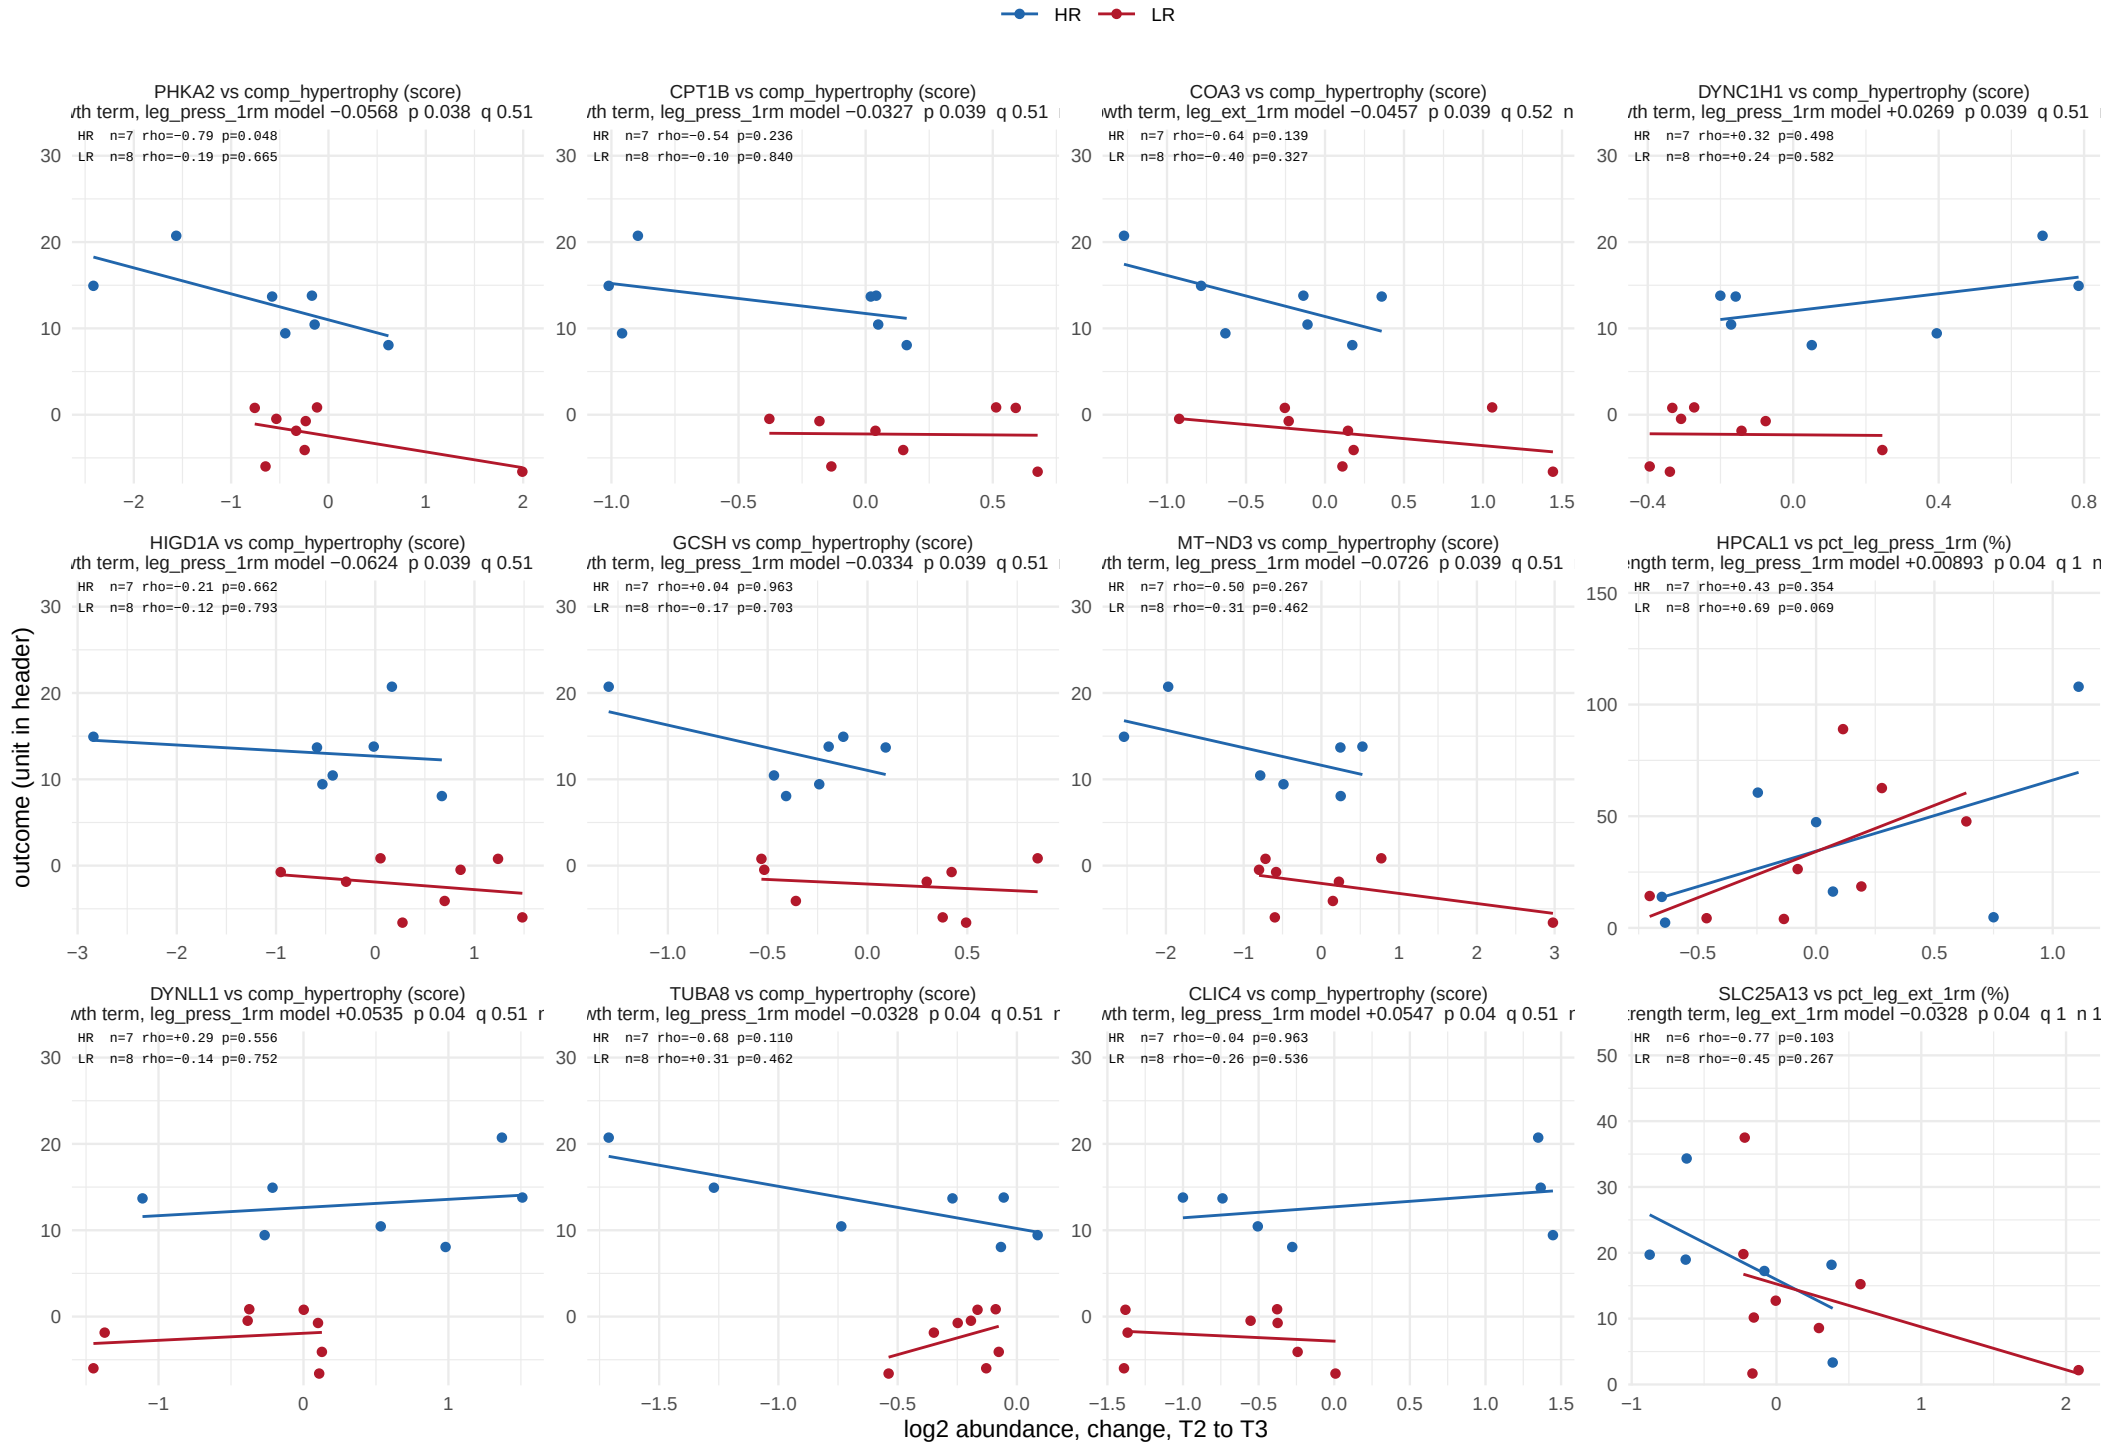

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, acute window


420 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 29 of 35.

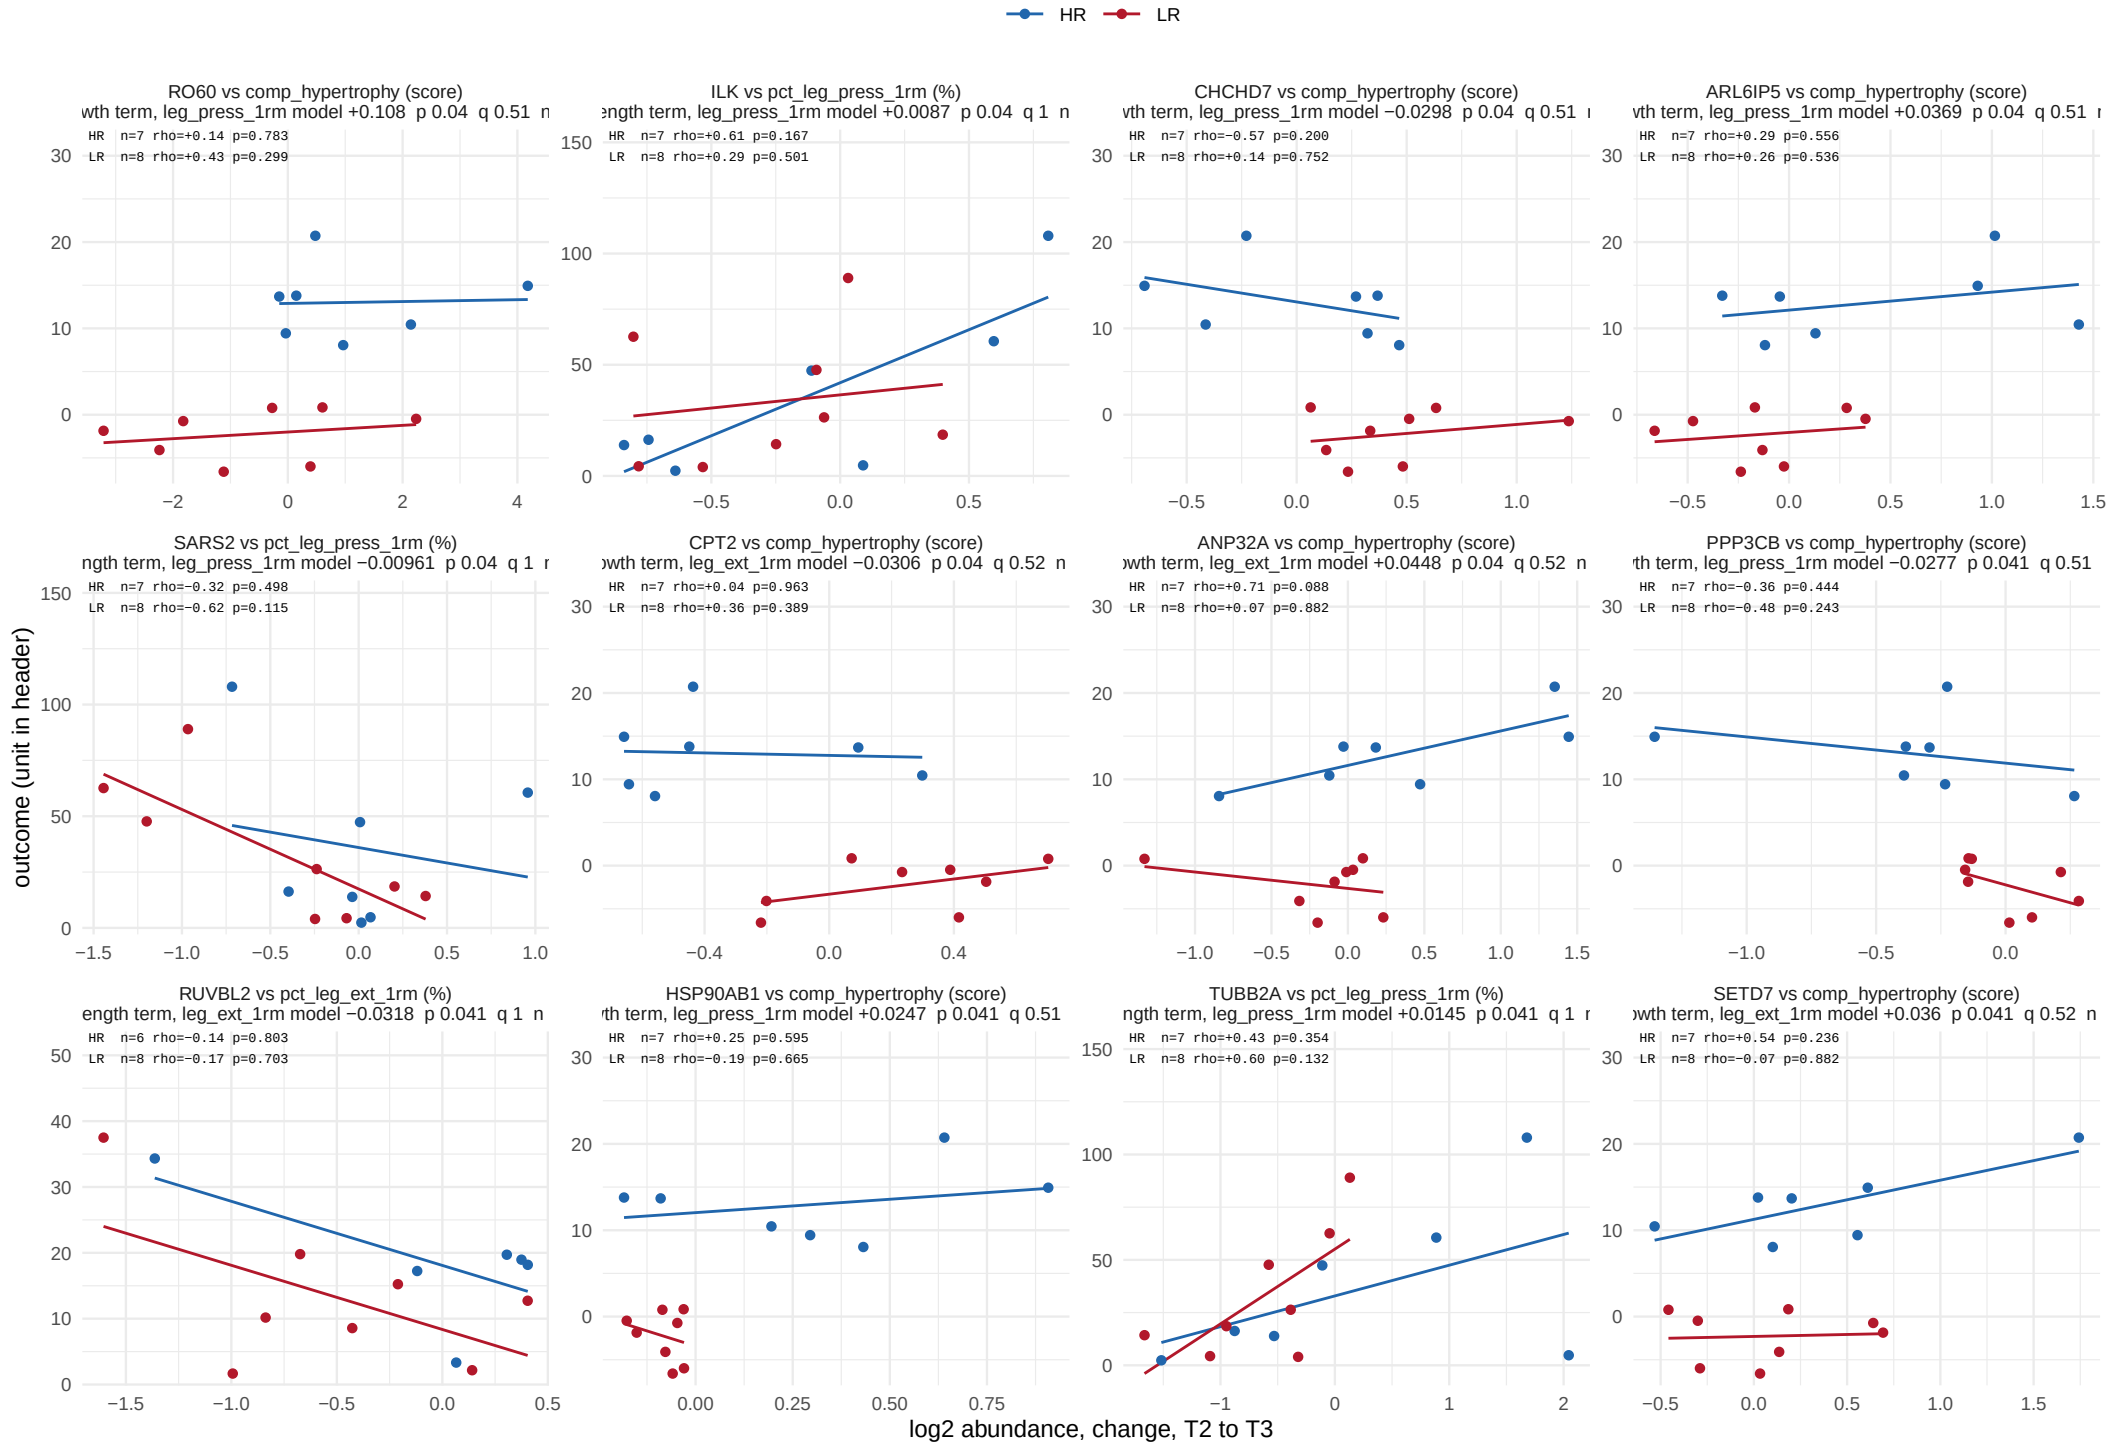

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, acute window


420 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 30 of 35.

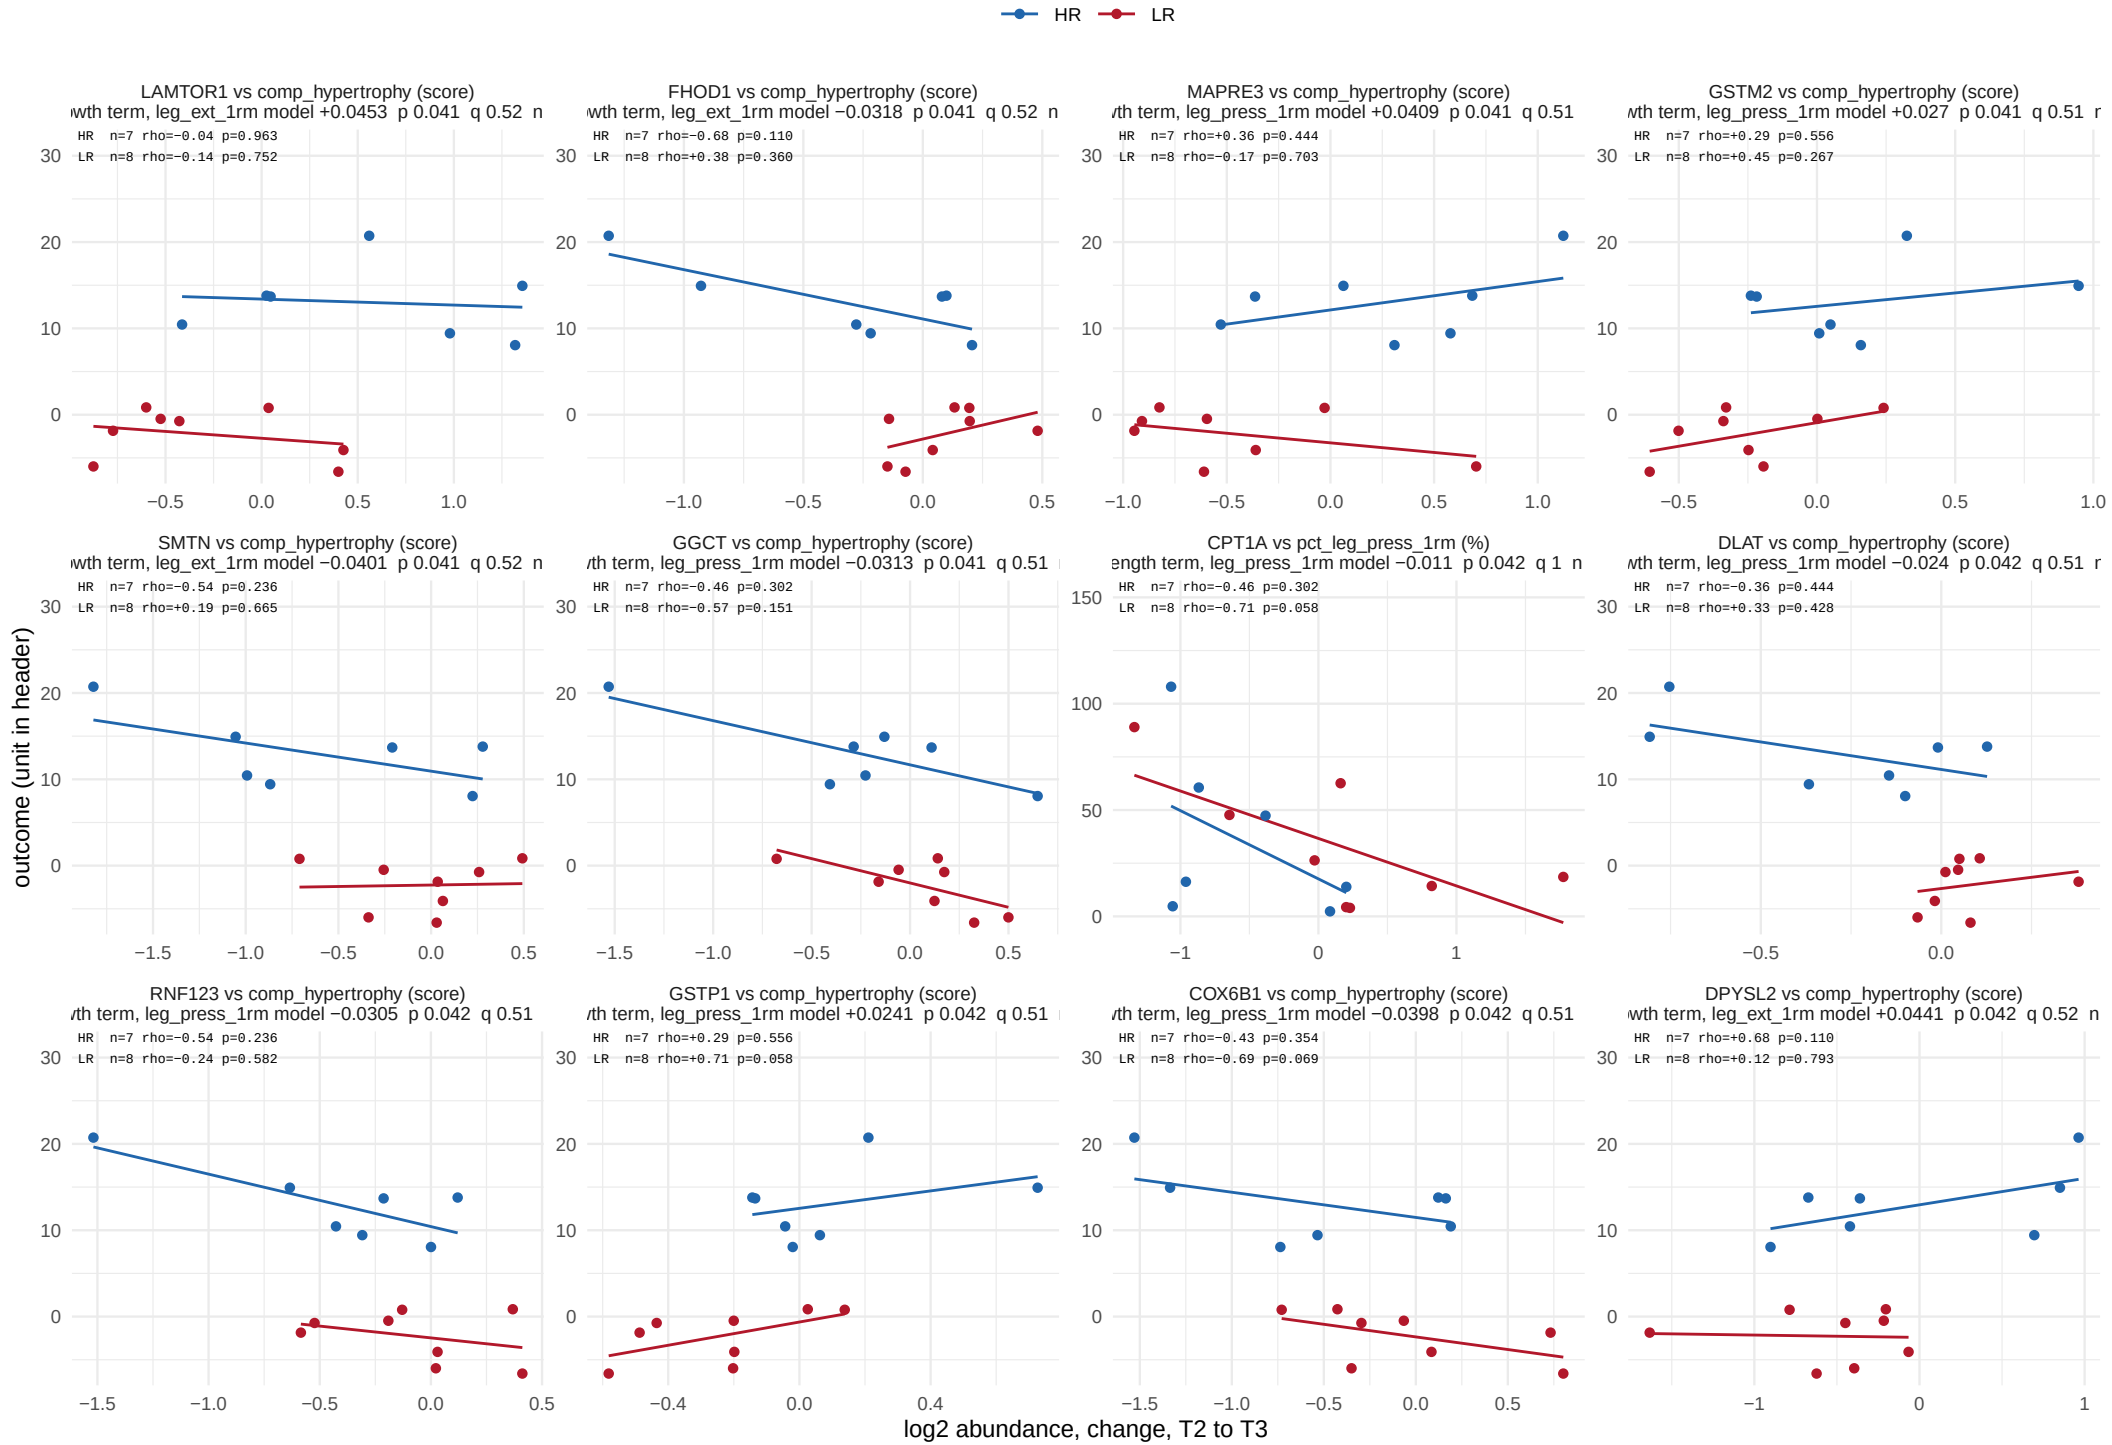

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, acute window


420 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 31 of 35.

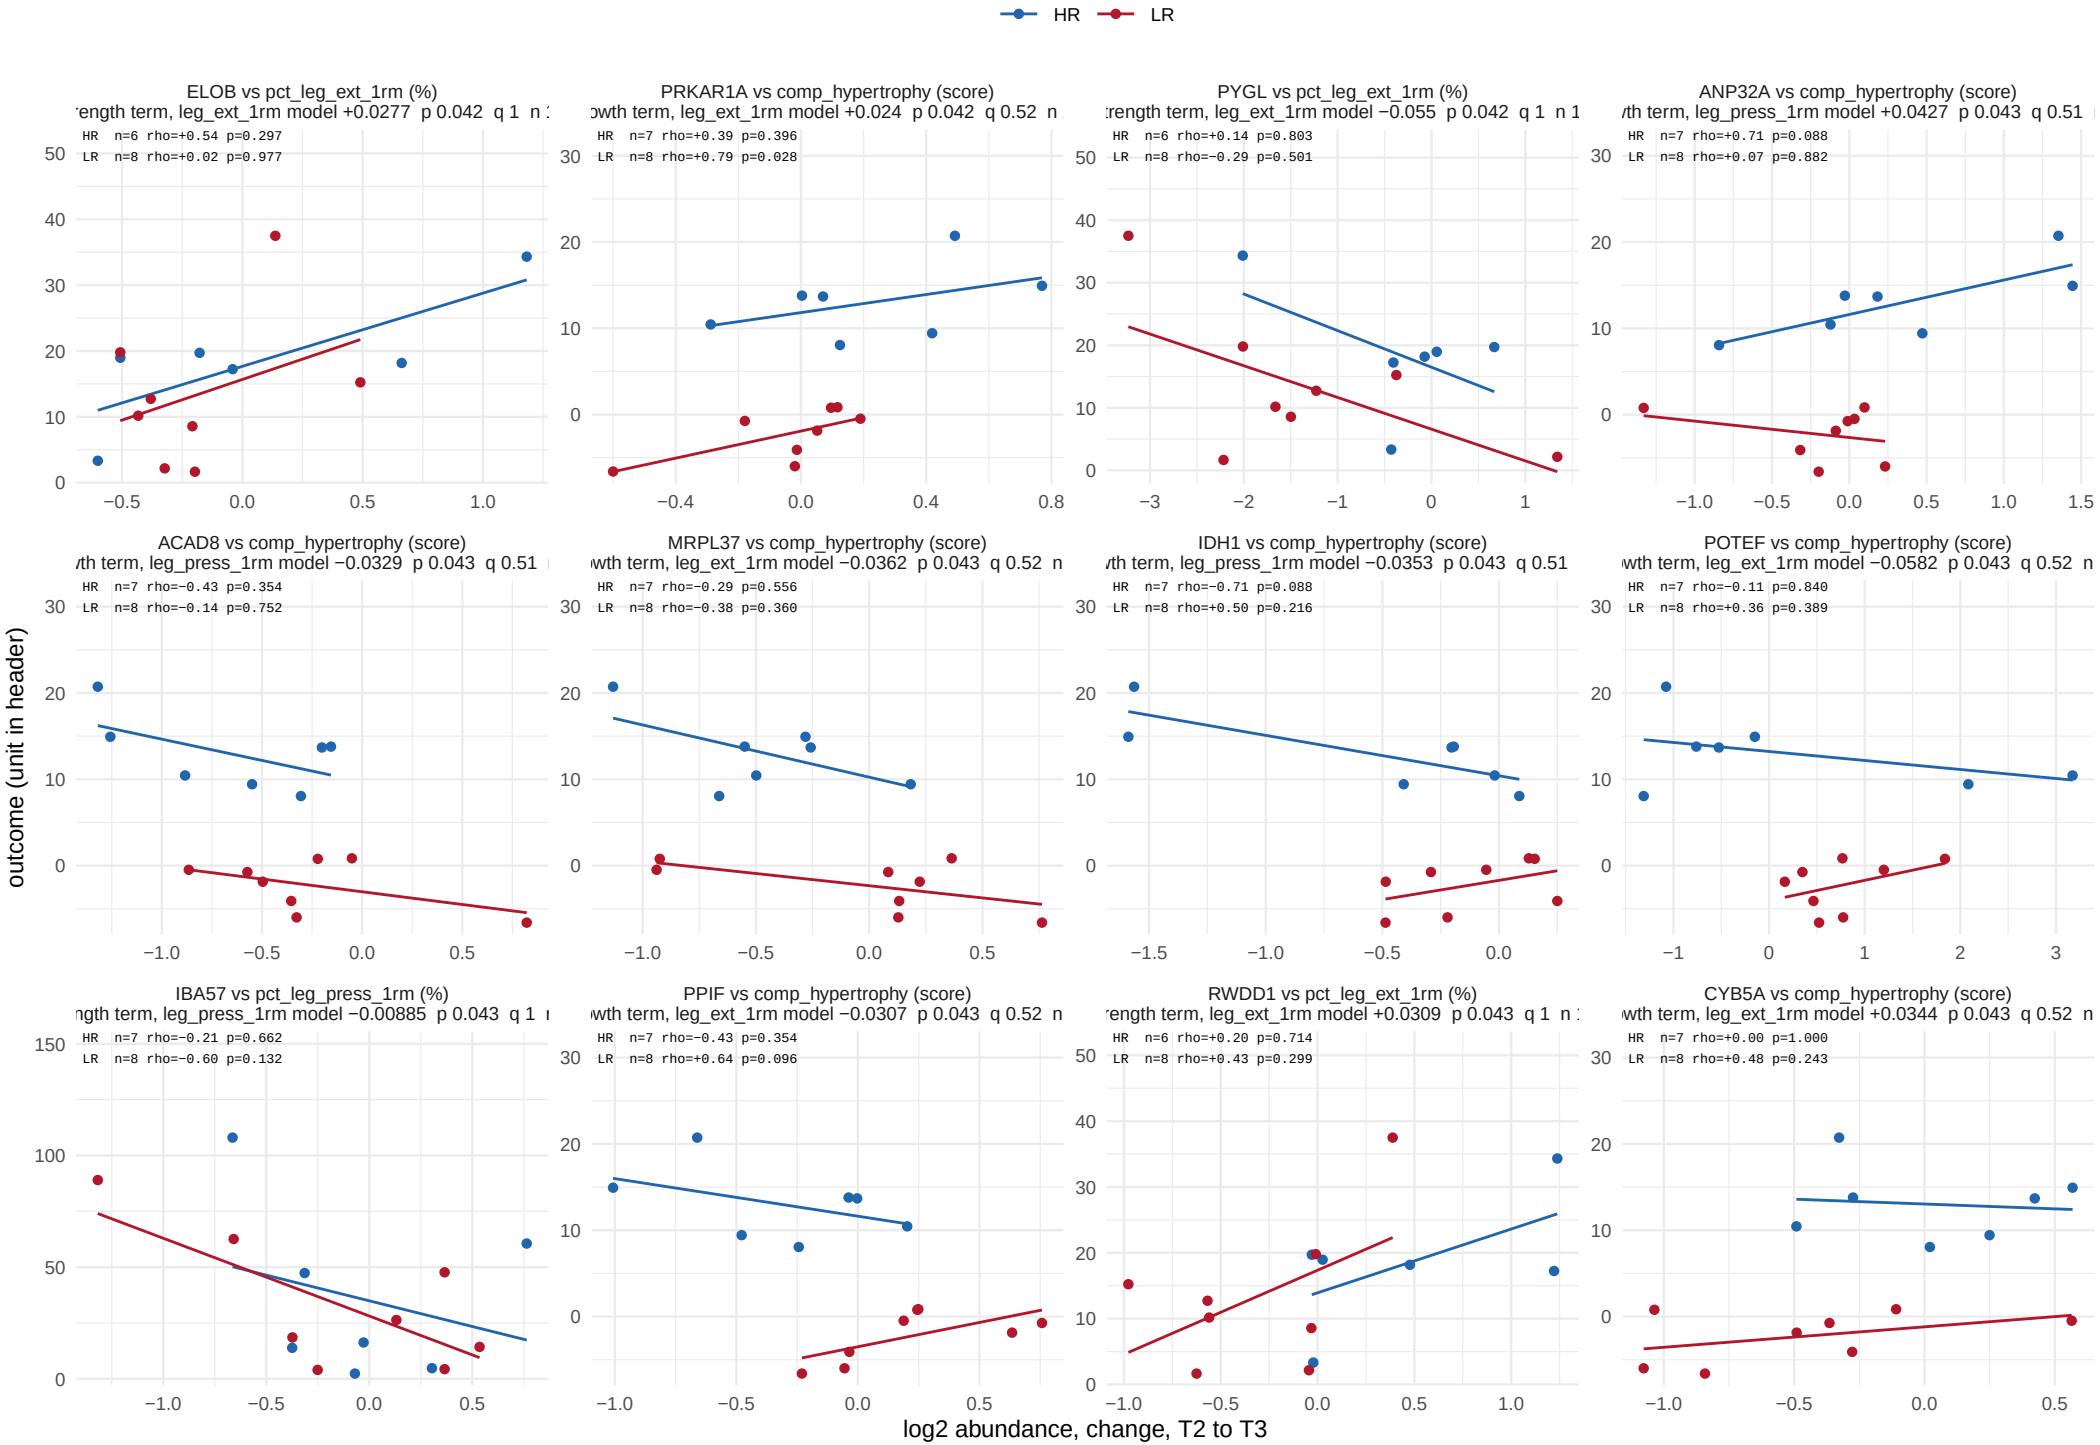

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, acute window


420 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 32 of 35.

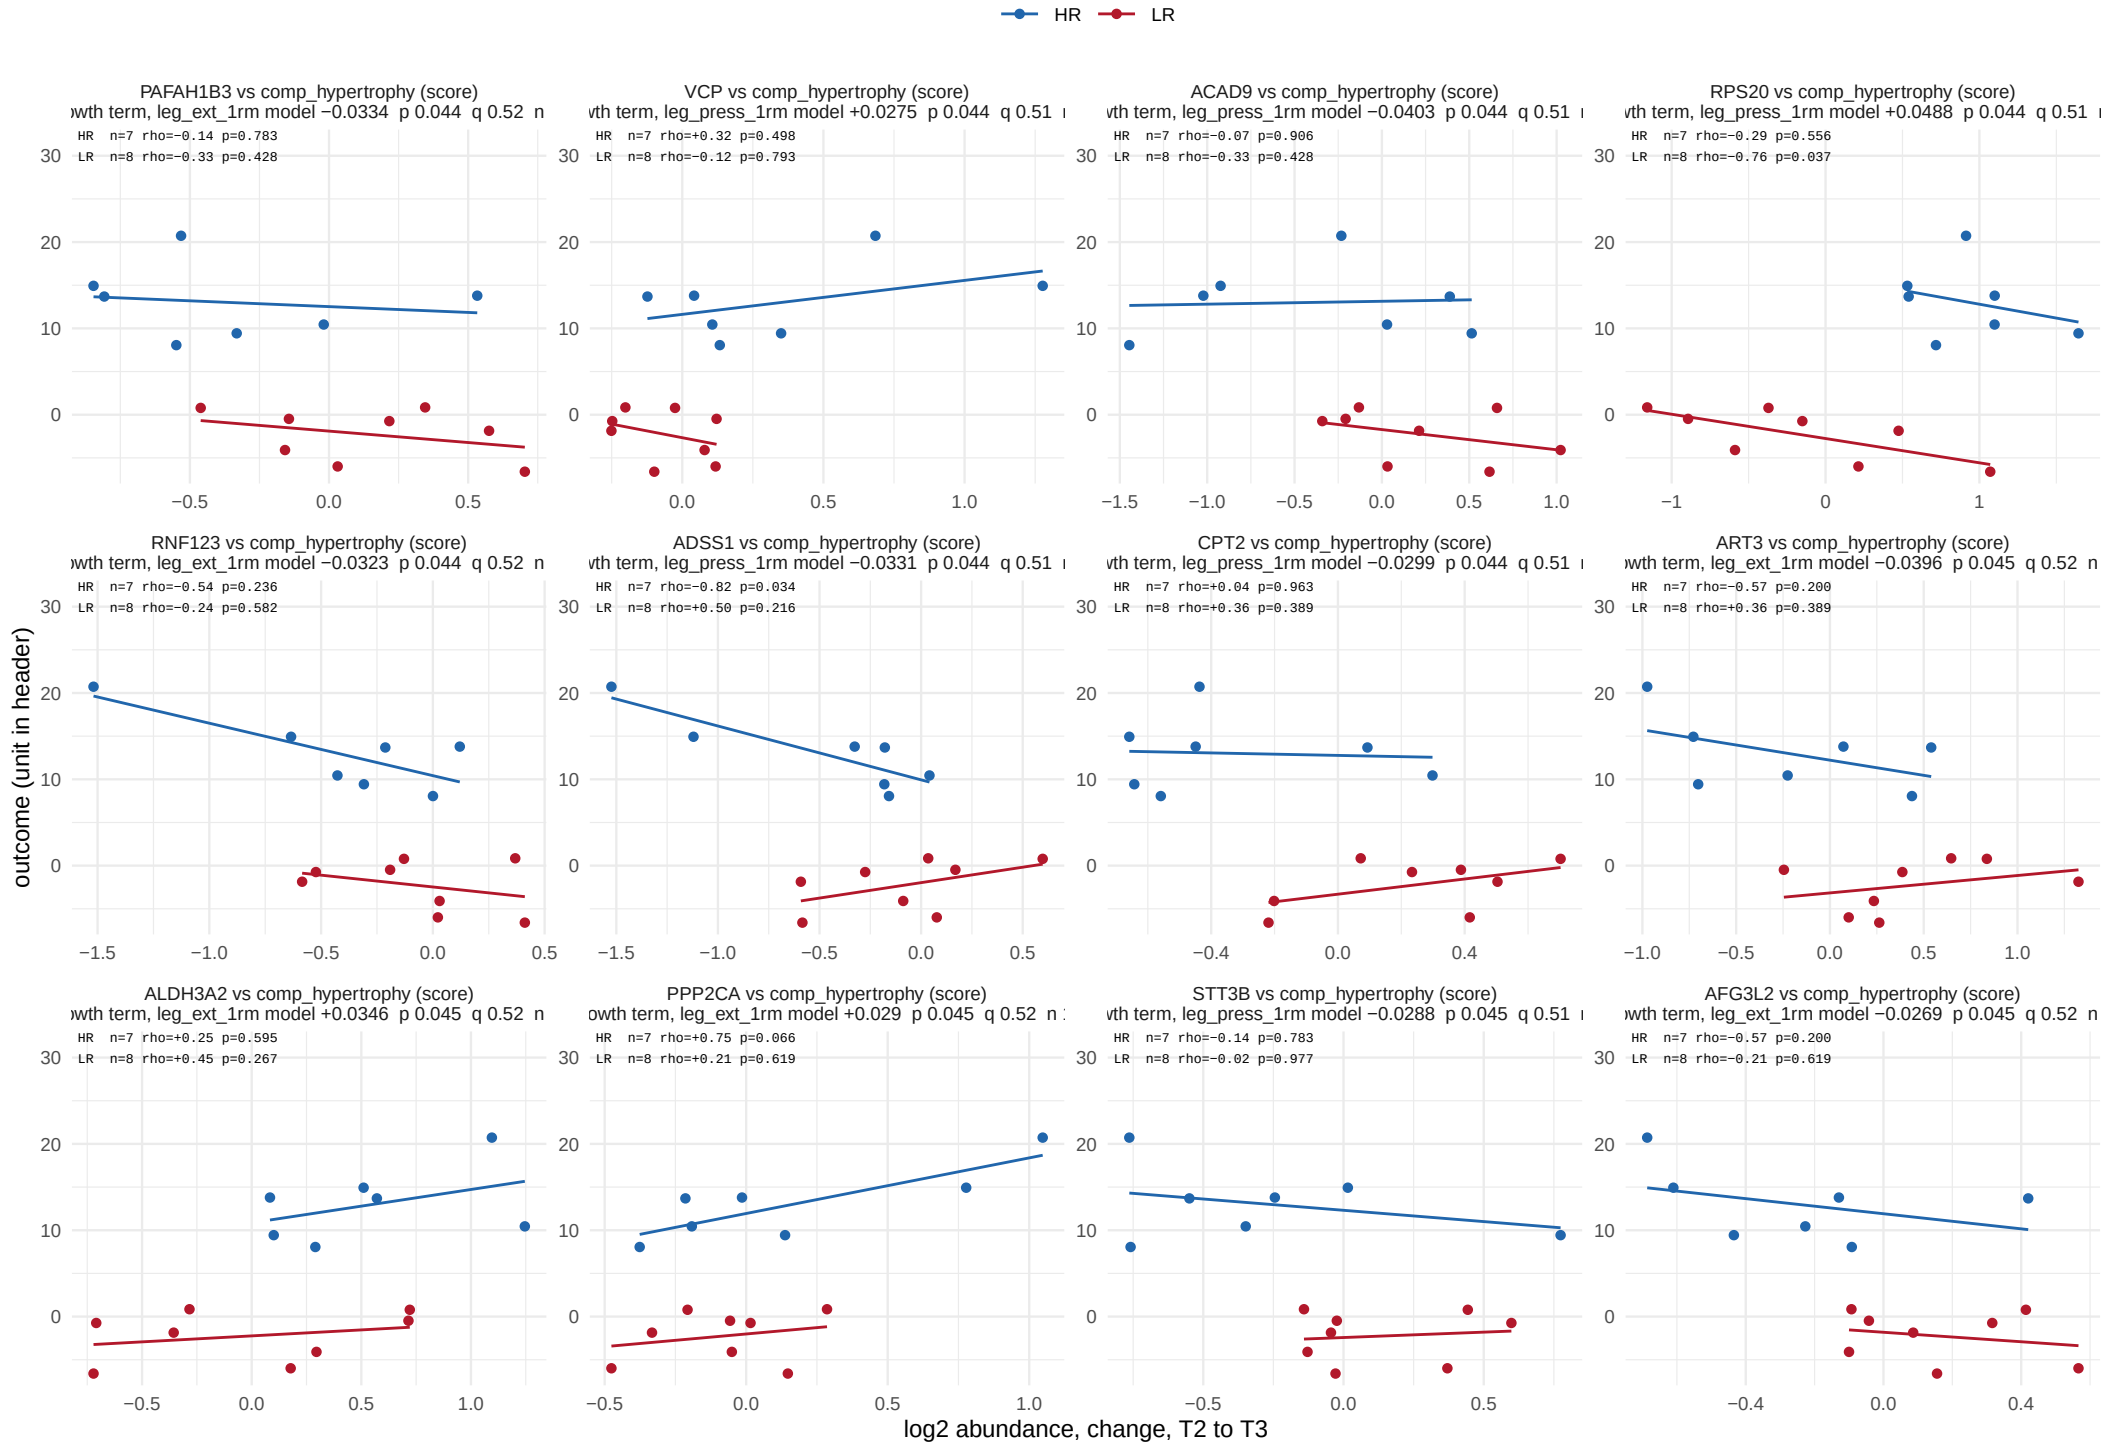

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, acute window


420 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 33 of 35.

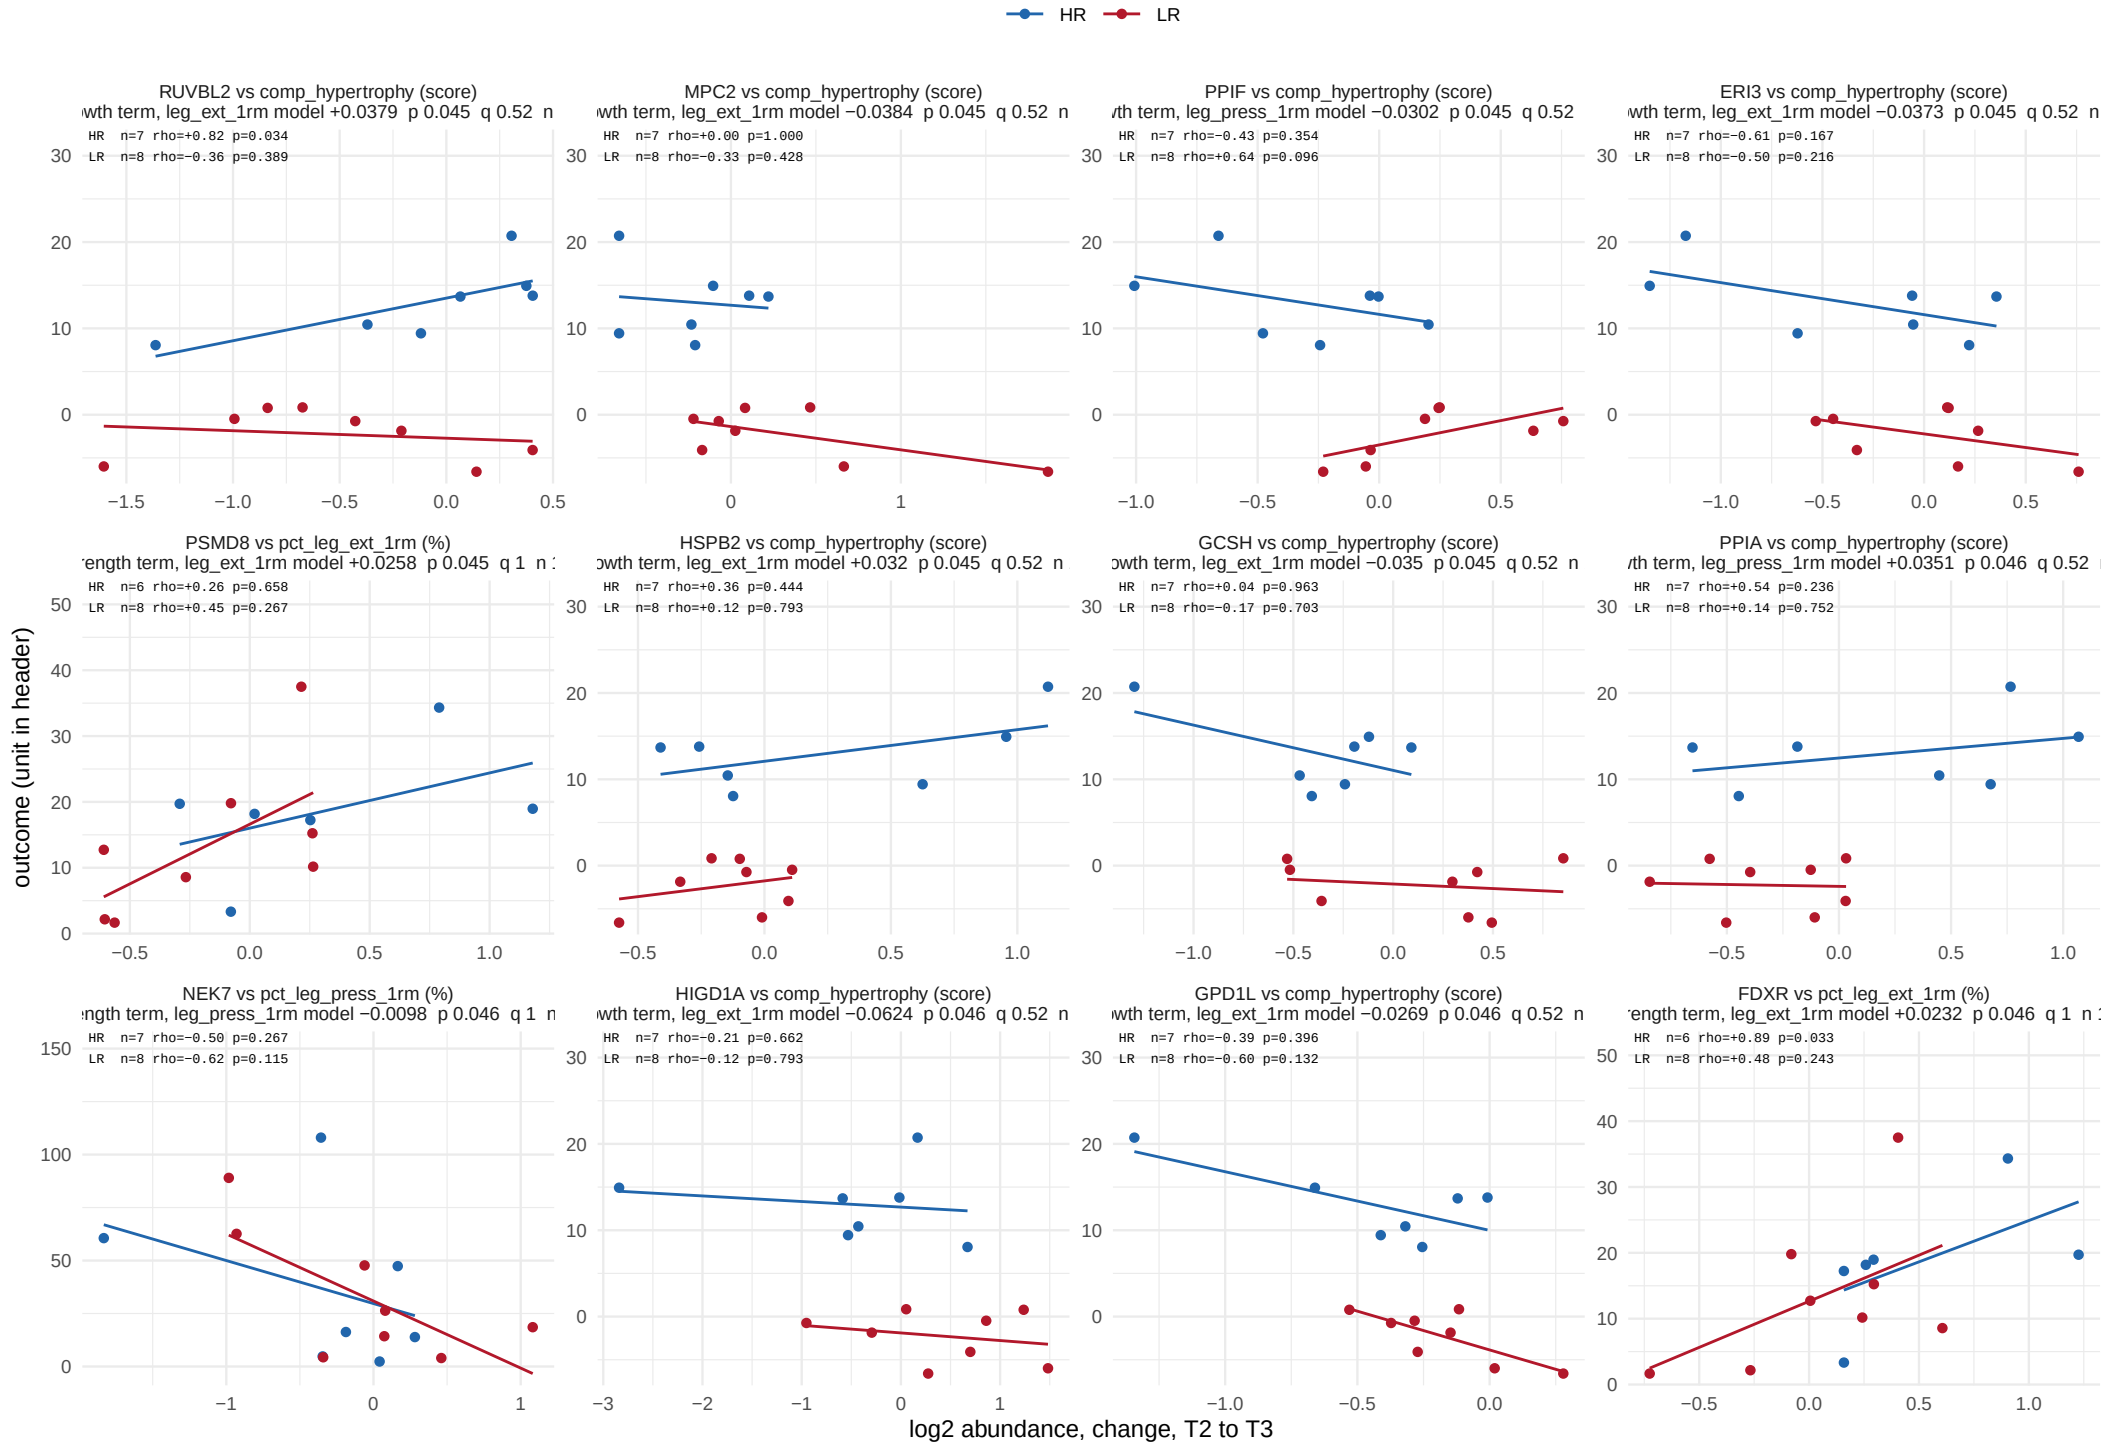

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, acute window


420 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 34 of 35.

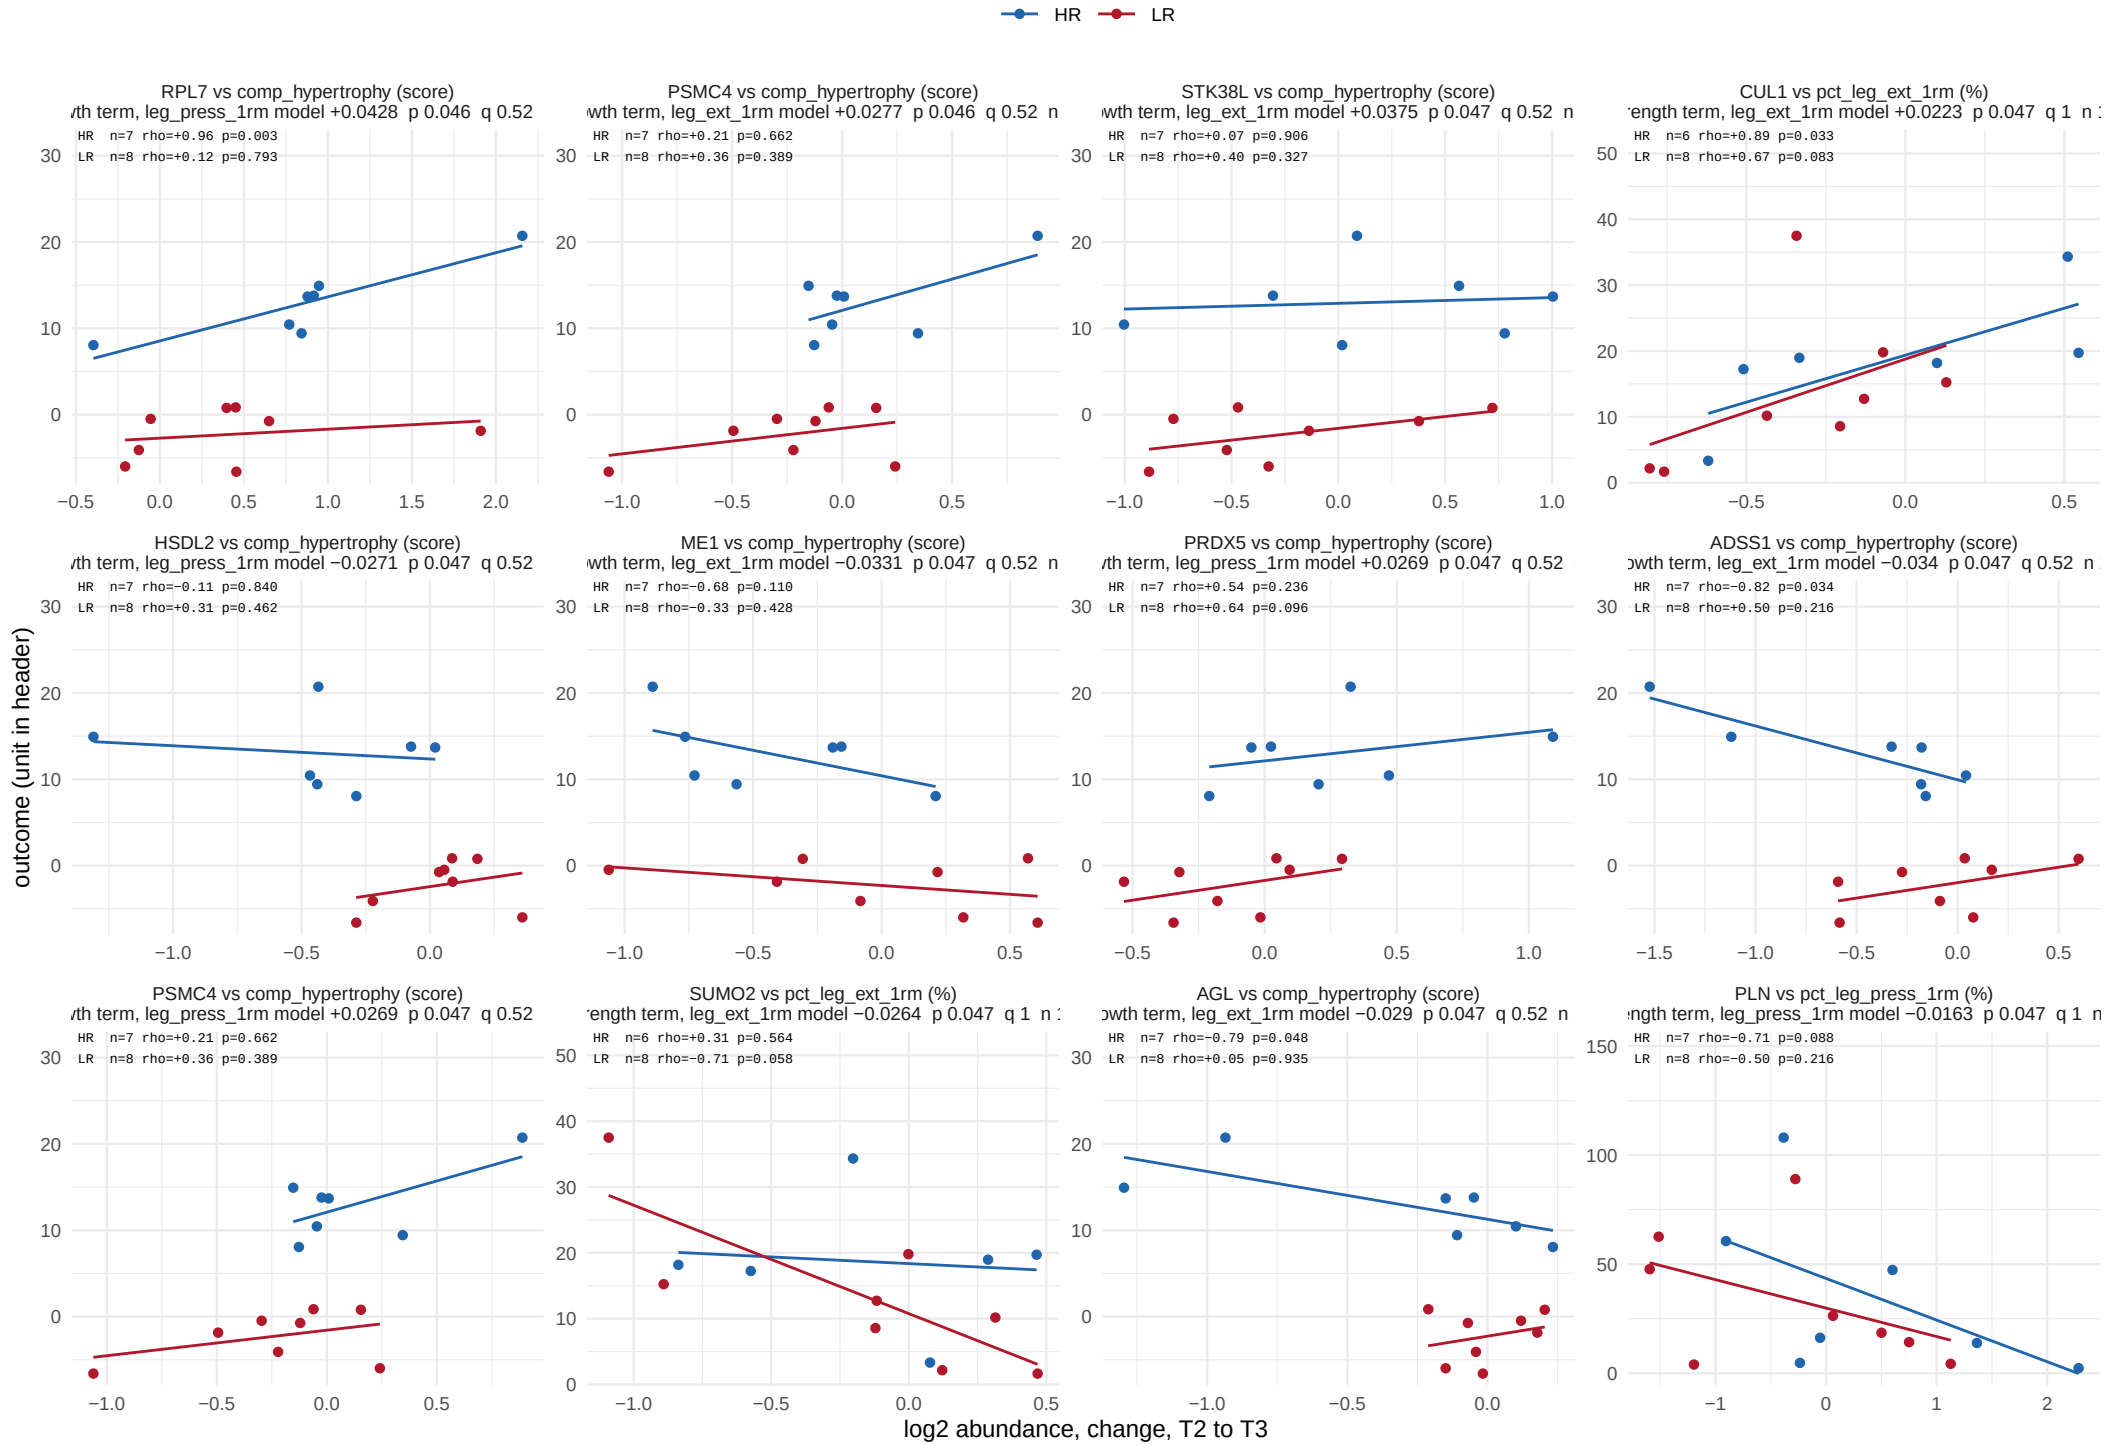

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, acute window

420 of 7600 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 35 of 35.

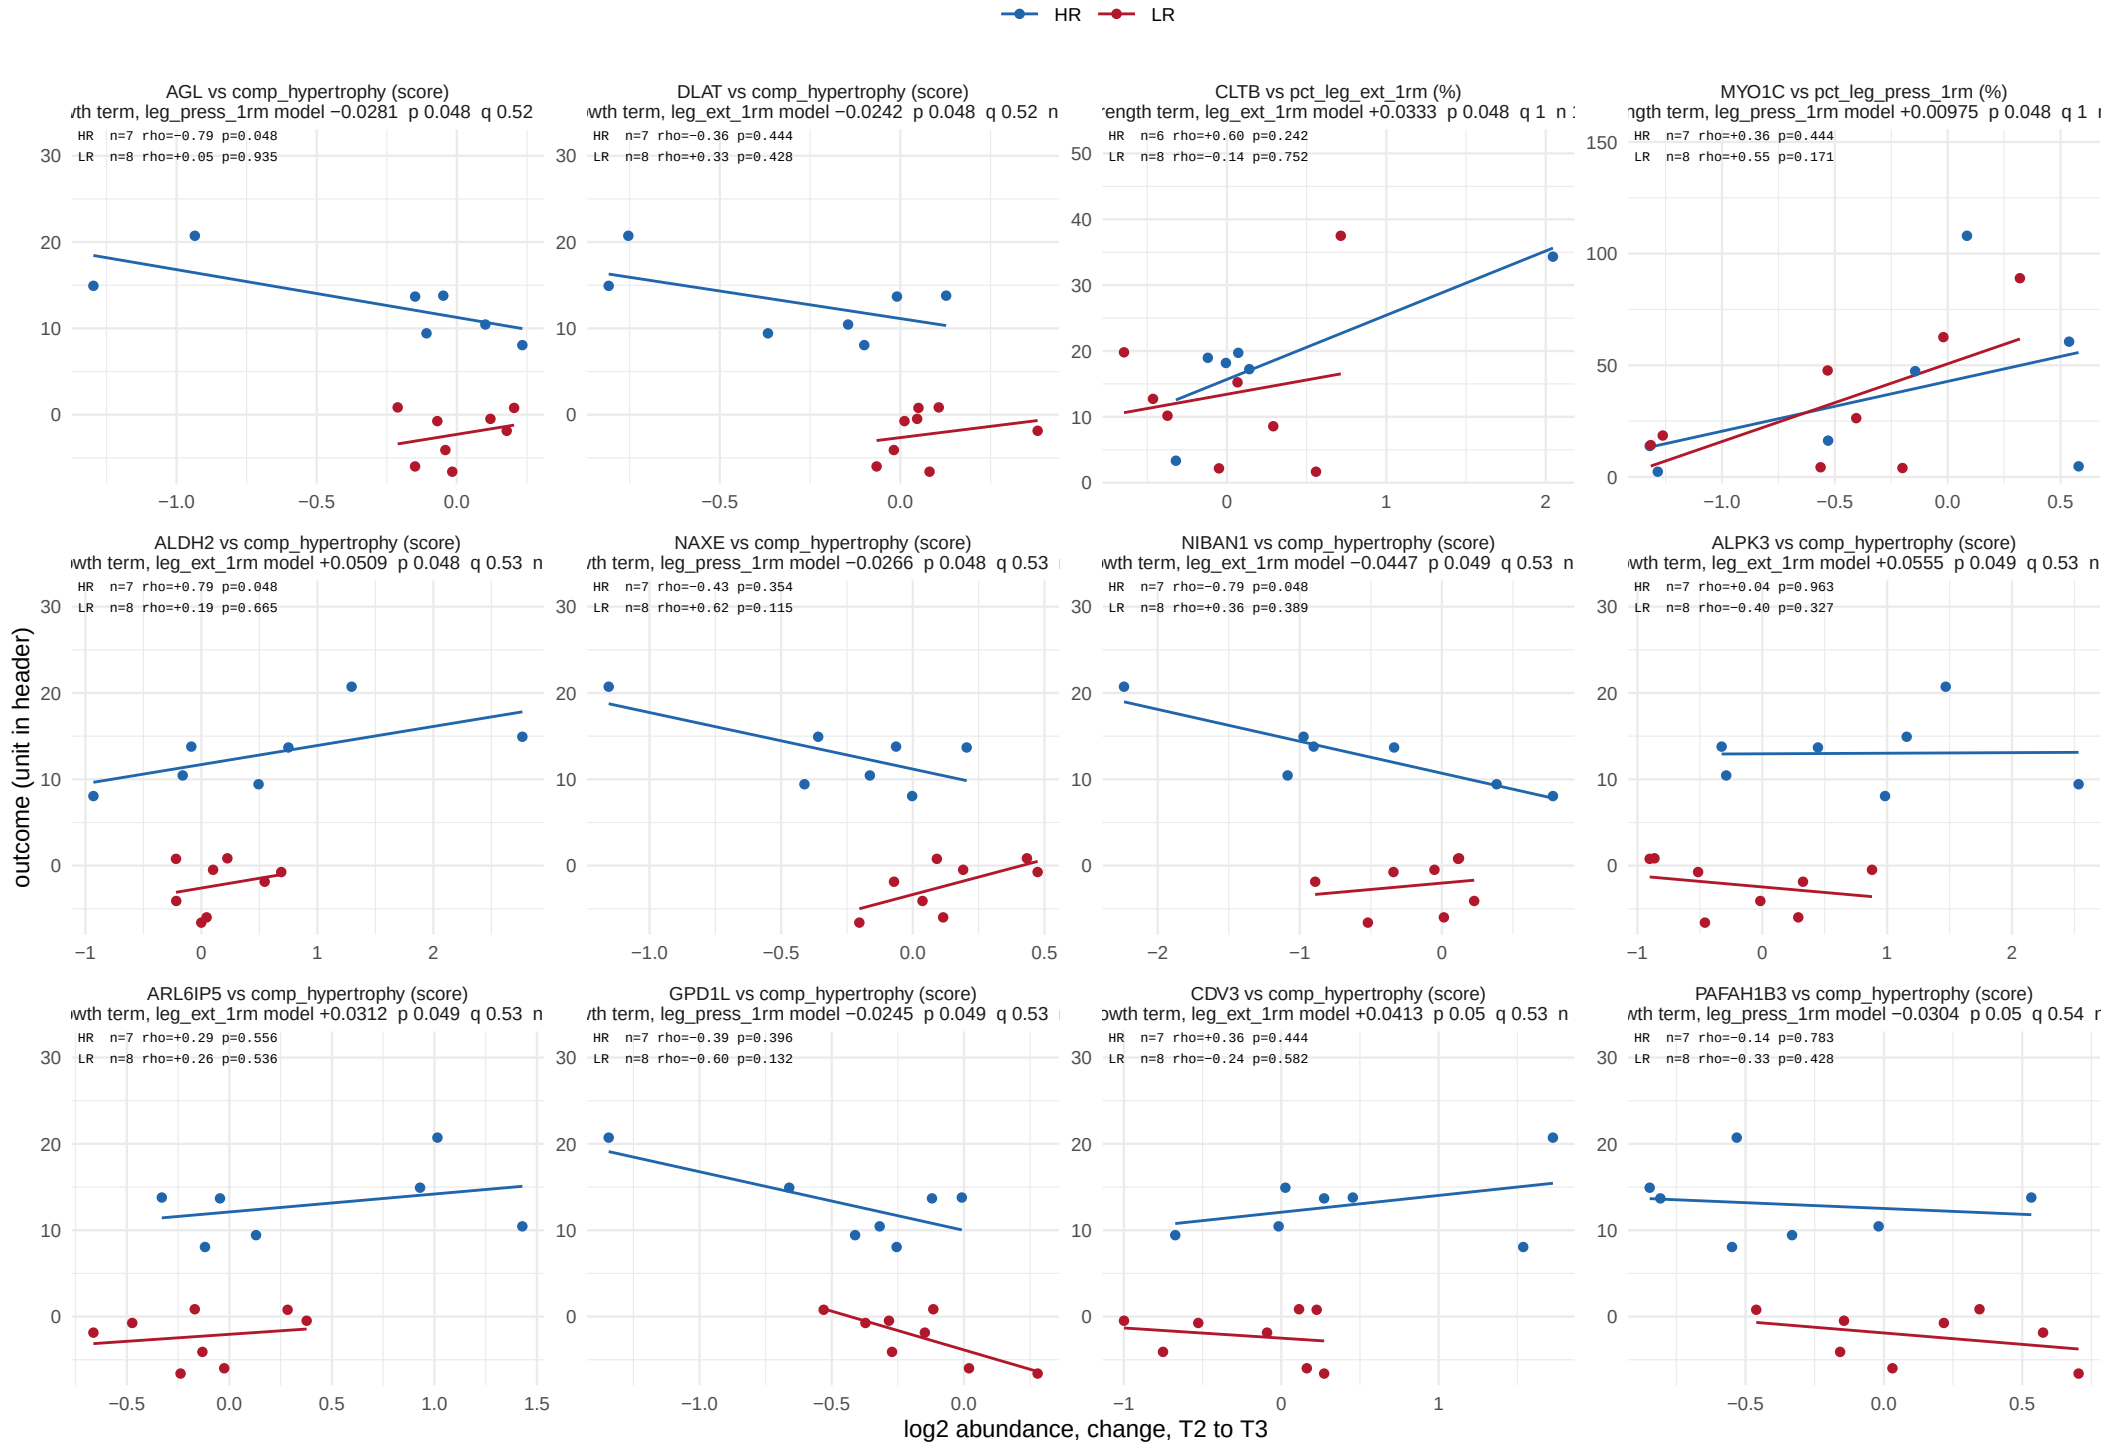

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.