

Sample model overview: Hallmark

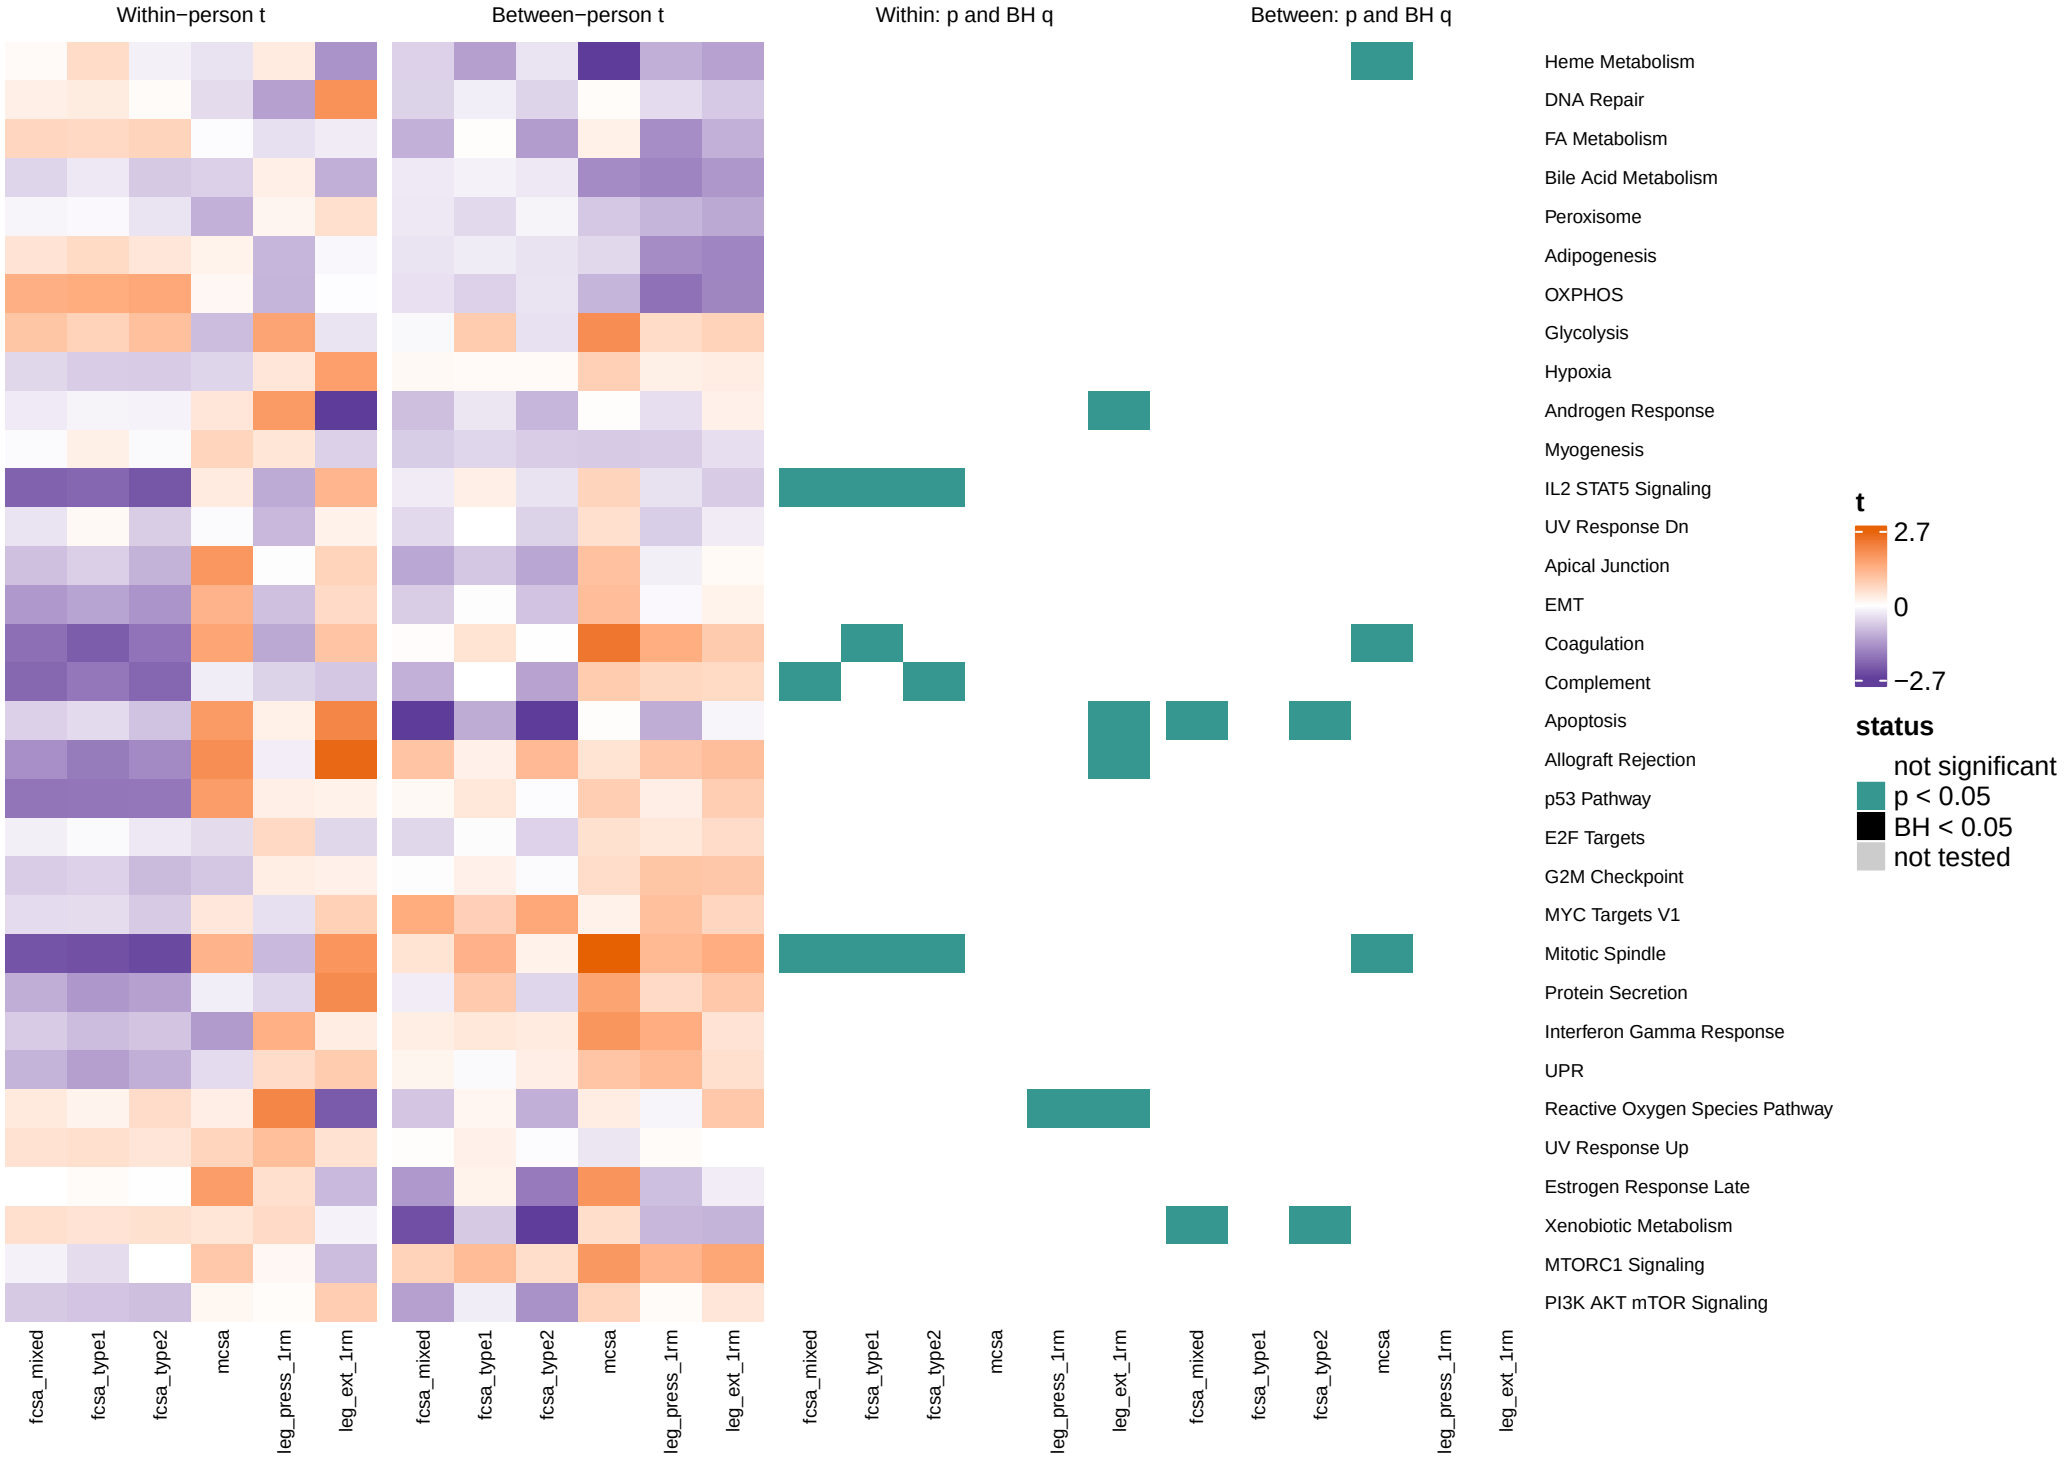


All 33 sets, one row each. Moderated t of the within and between terms, abundance ~ timepoint + between + within, subject blocked. Colours stop at the 99th percentile of |t|, 2.7. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/05_associate.xlsx, model.

Change score overview, training window: Hallmark

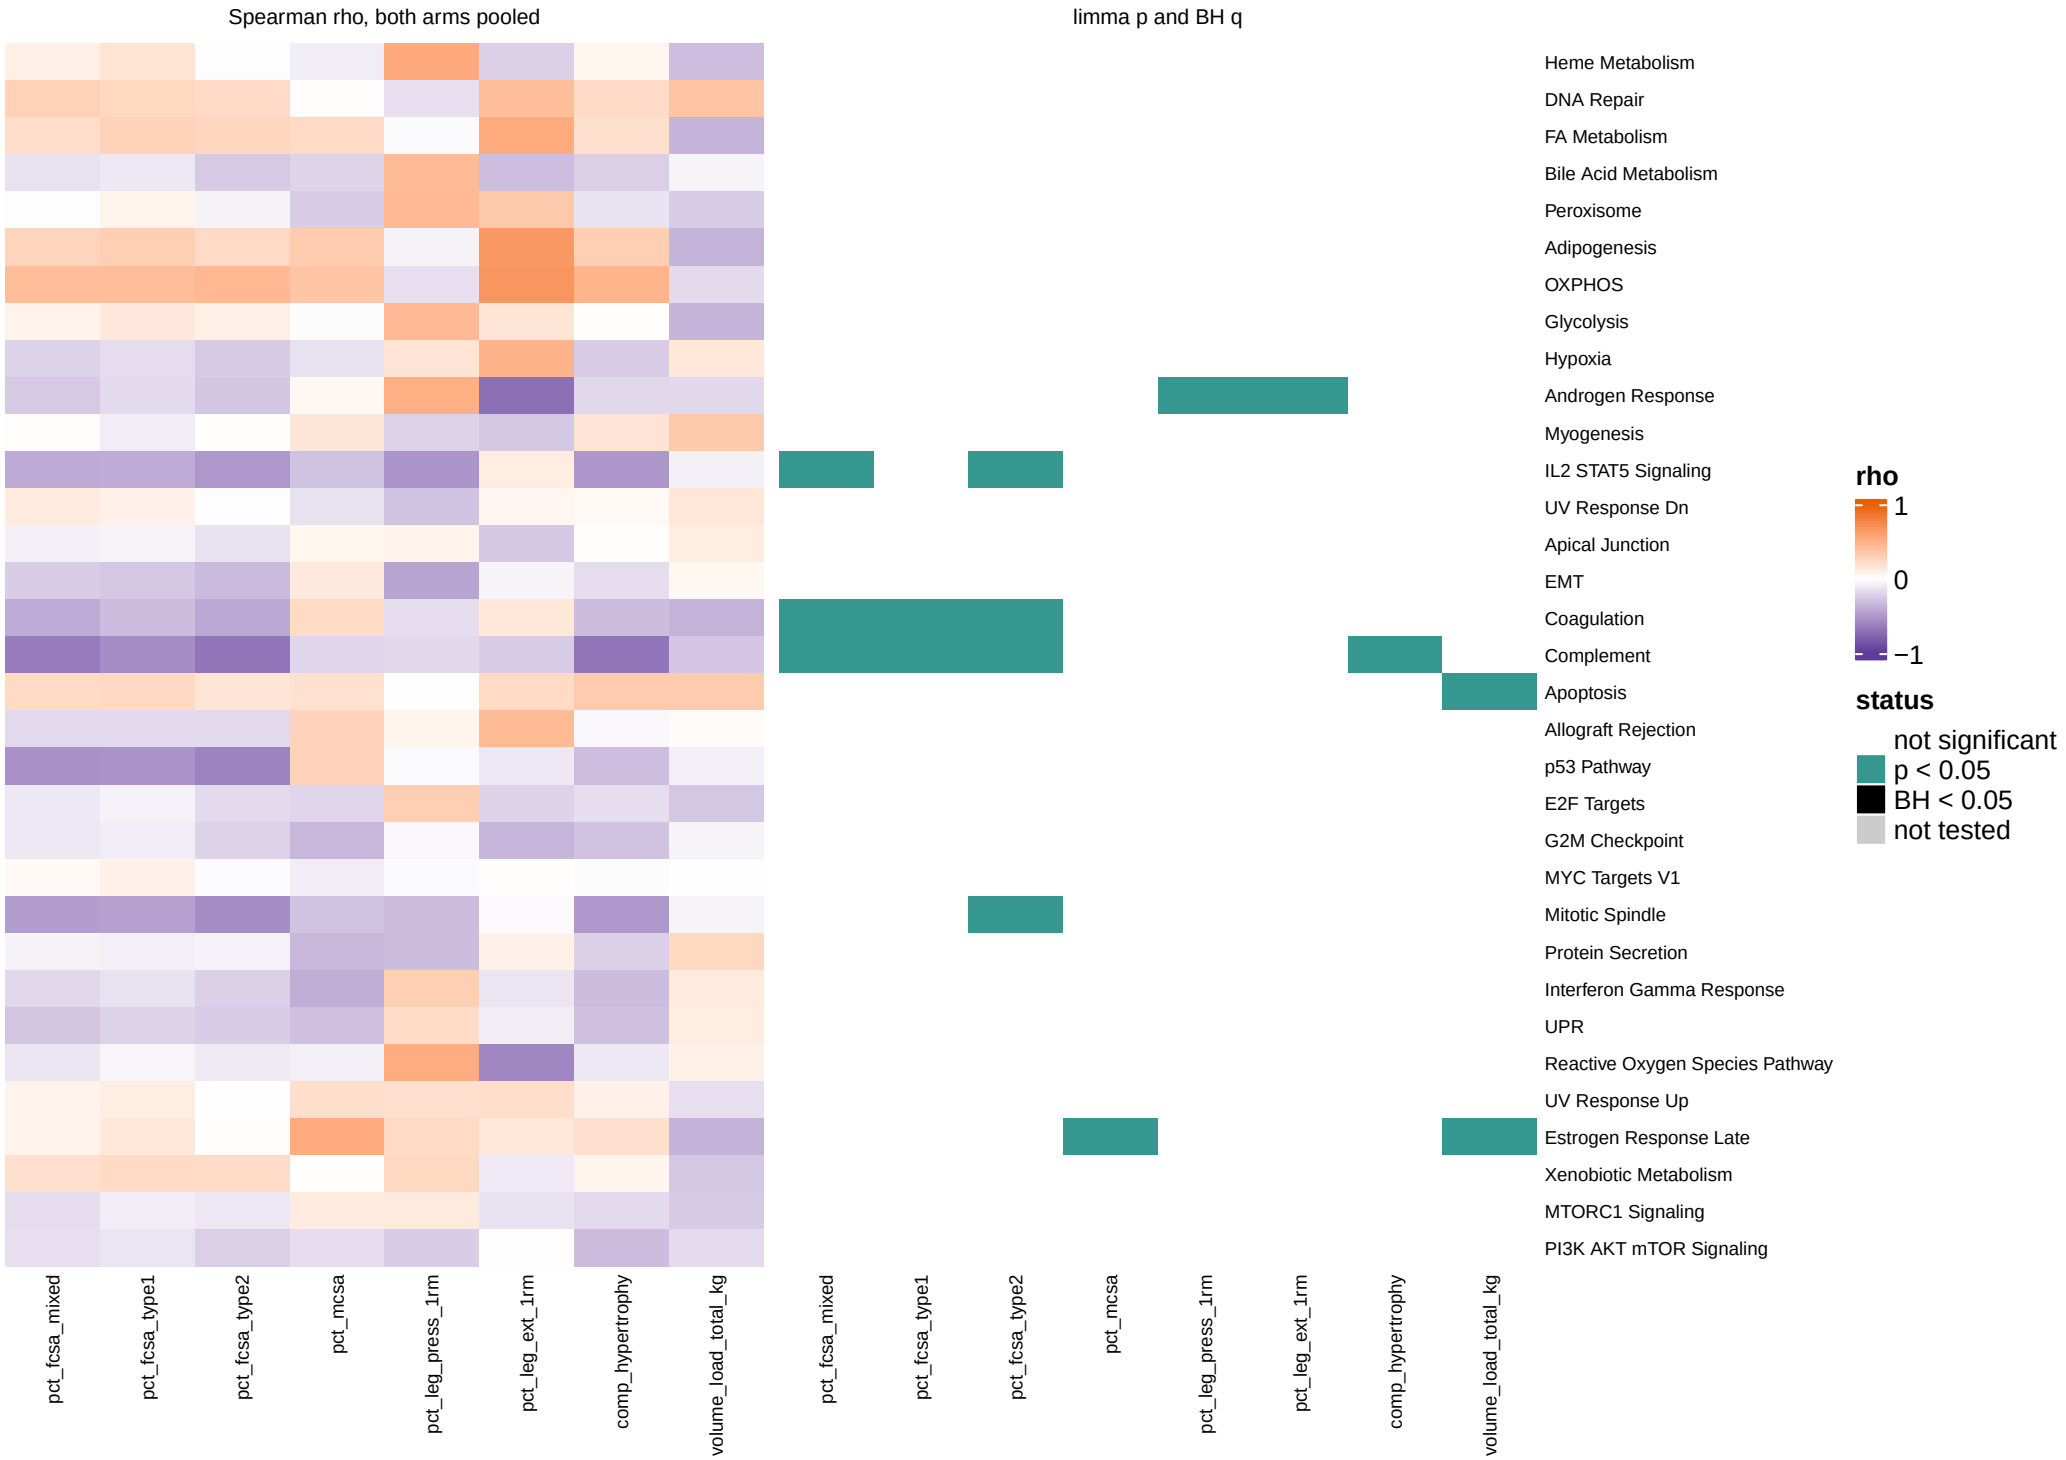


All 33 sets, one row each. Spearman rho between the singscore (change, T1 to T2) and each outcome; status from limma. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/05_associate.xlsx, change_score.

Change score overview, baseline window: Hallmark

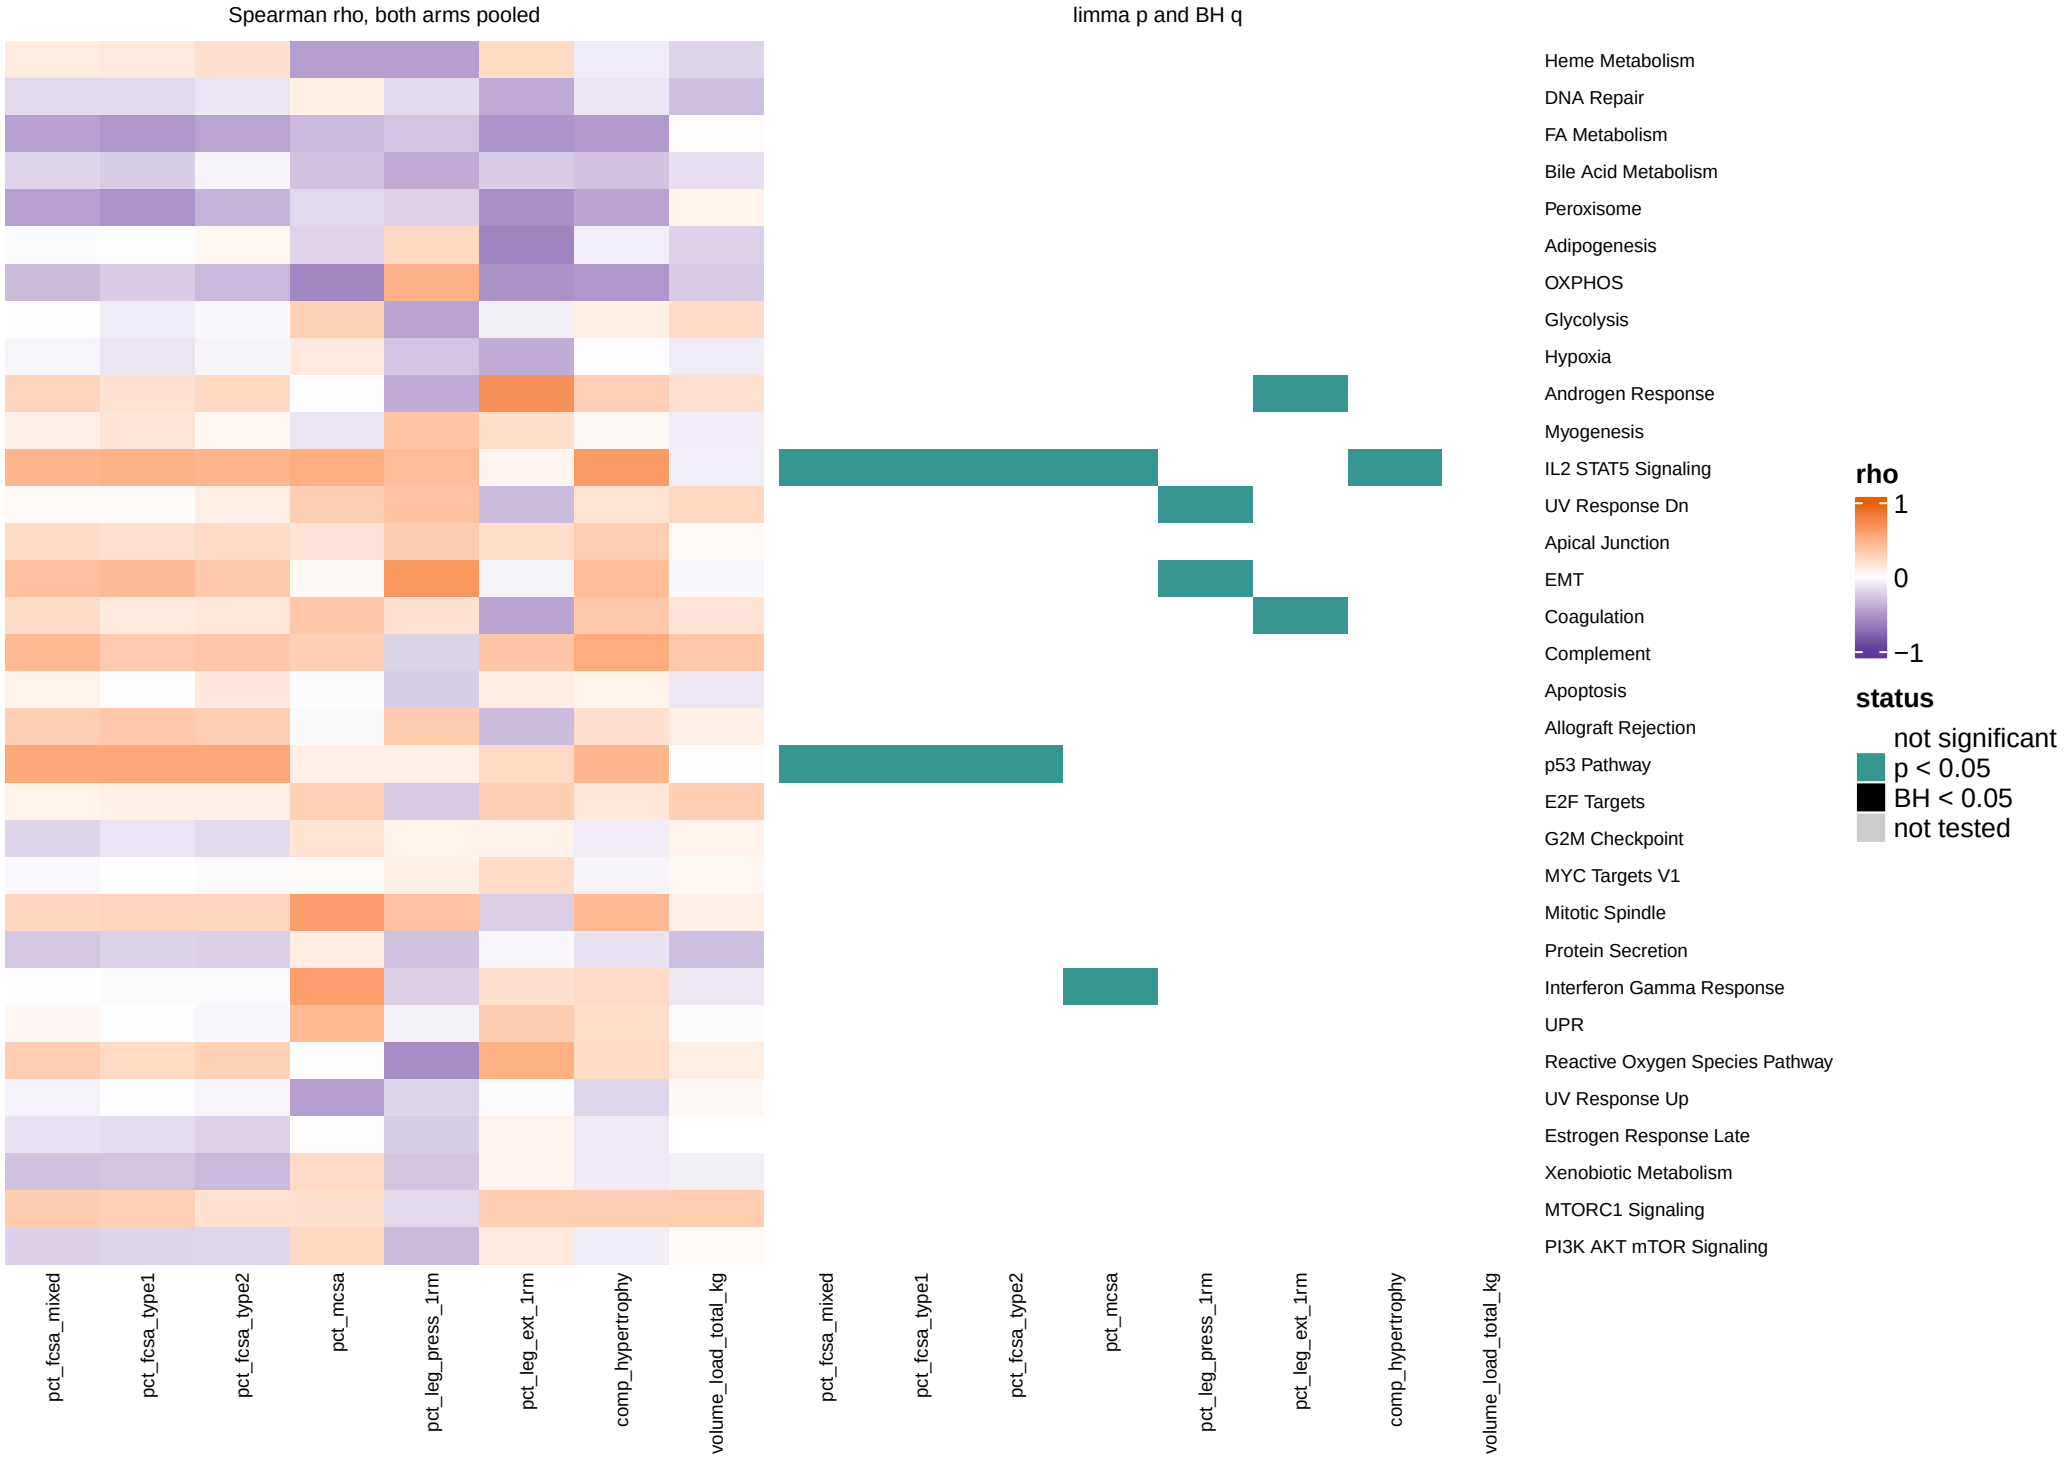


All 33 sets, one row each. Spearman rho between the singscore (T1 level) and each outcome; status from limma. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/05_associate.xlsx, change_score.

Change score overview, acute window: Hallmark

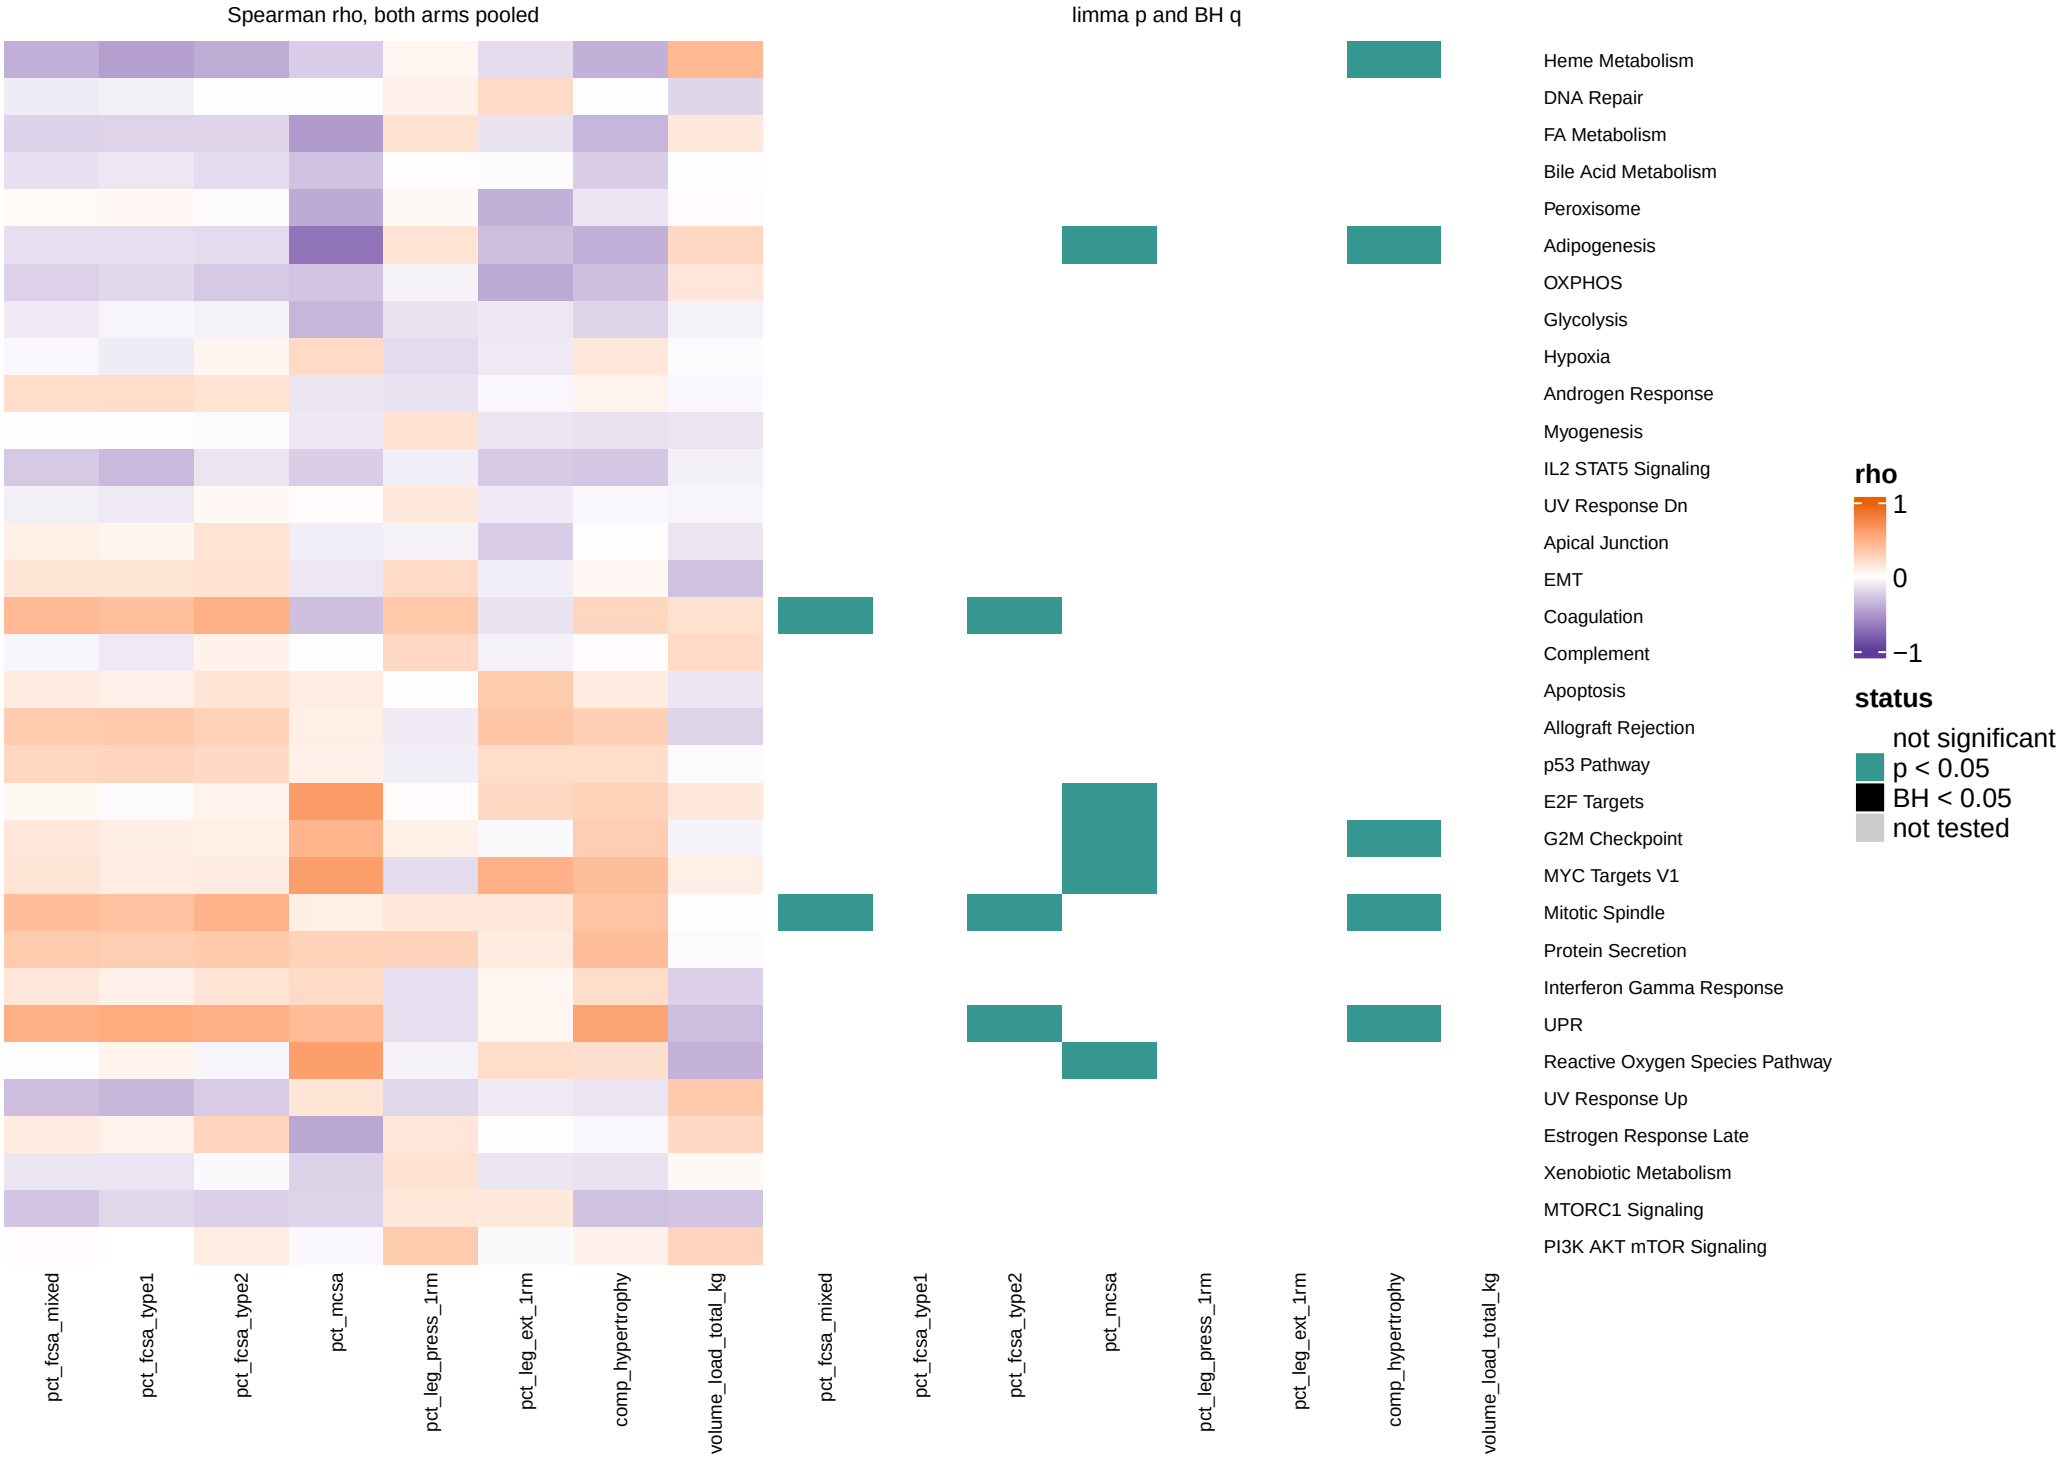


All 33 sets, one row each. Spearman rho between the singscore (change, T2 to T3) and each outcome; status from limma. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/05_associate.xlsx, change_score.

Change score overview, baseline_level window: Hallmark

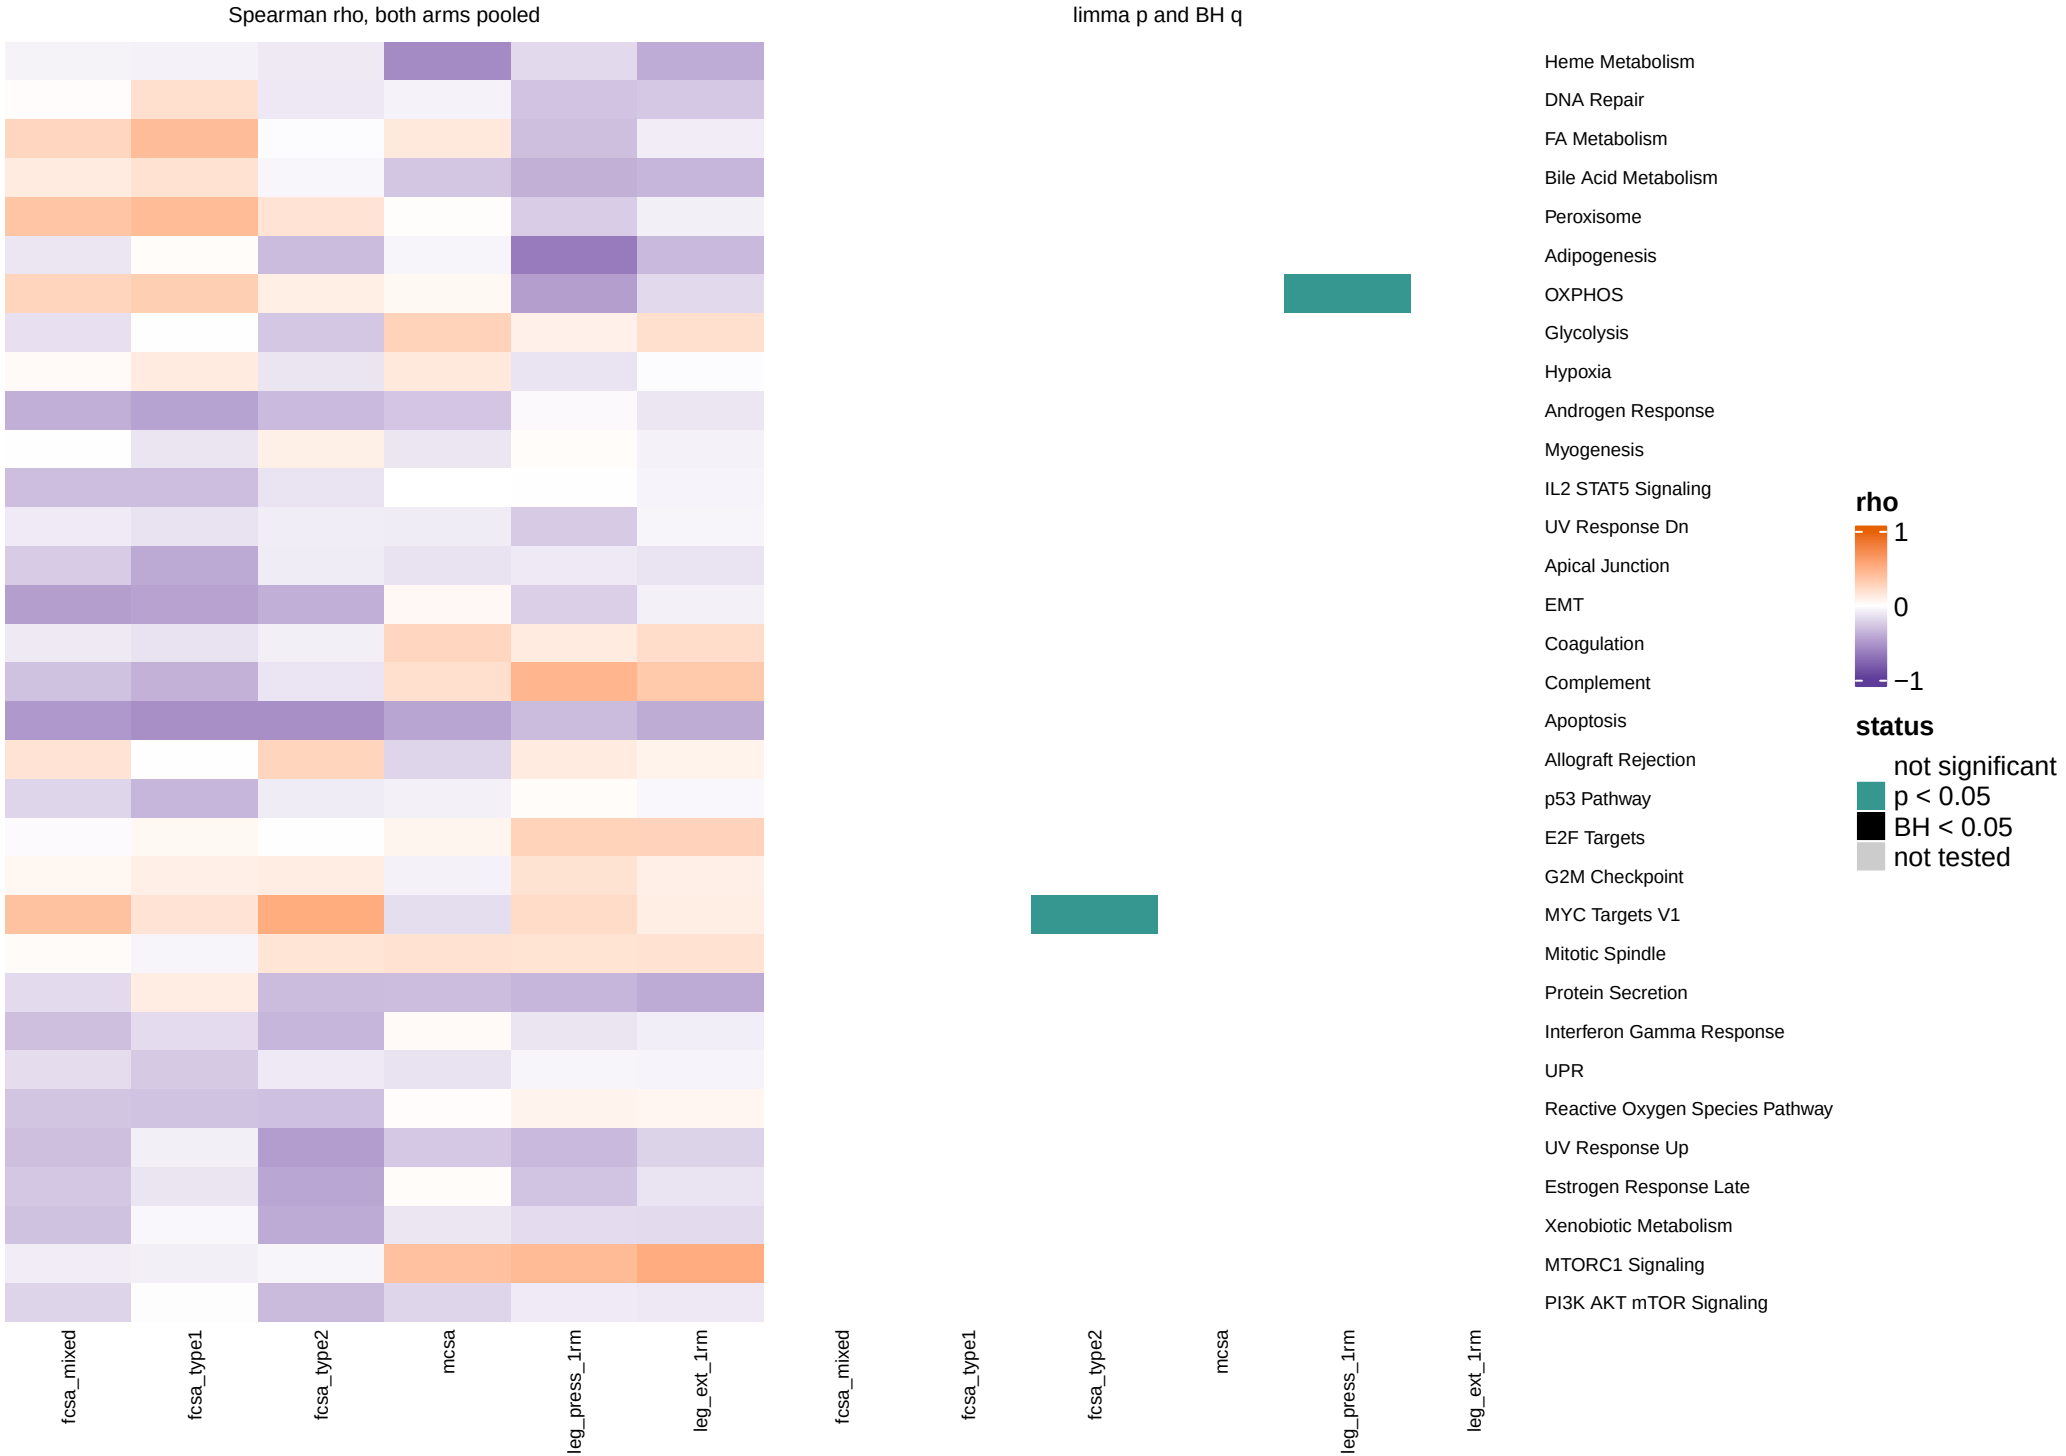


All 33 sets, one row each. Spearman rho between the singscore (T1 level) and each outcome; status from limma. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/05_associate.xlsx, change_score.

Change score overview, post_level window: Hallmark

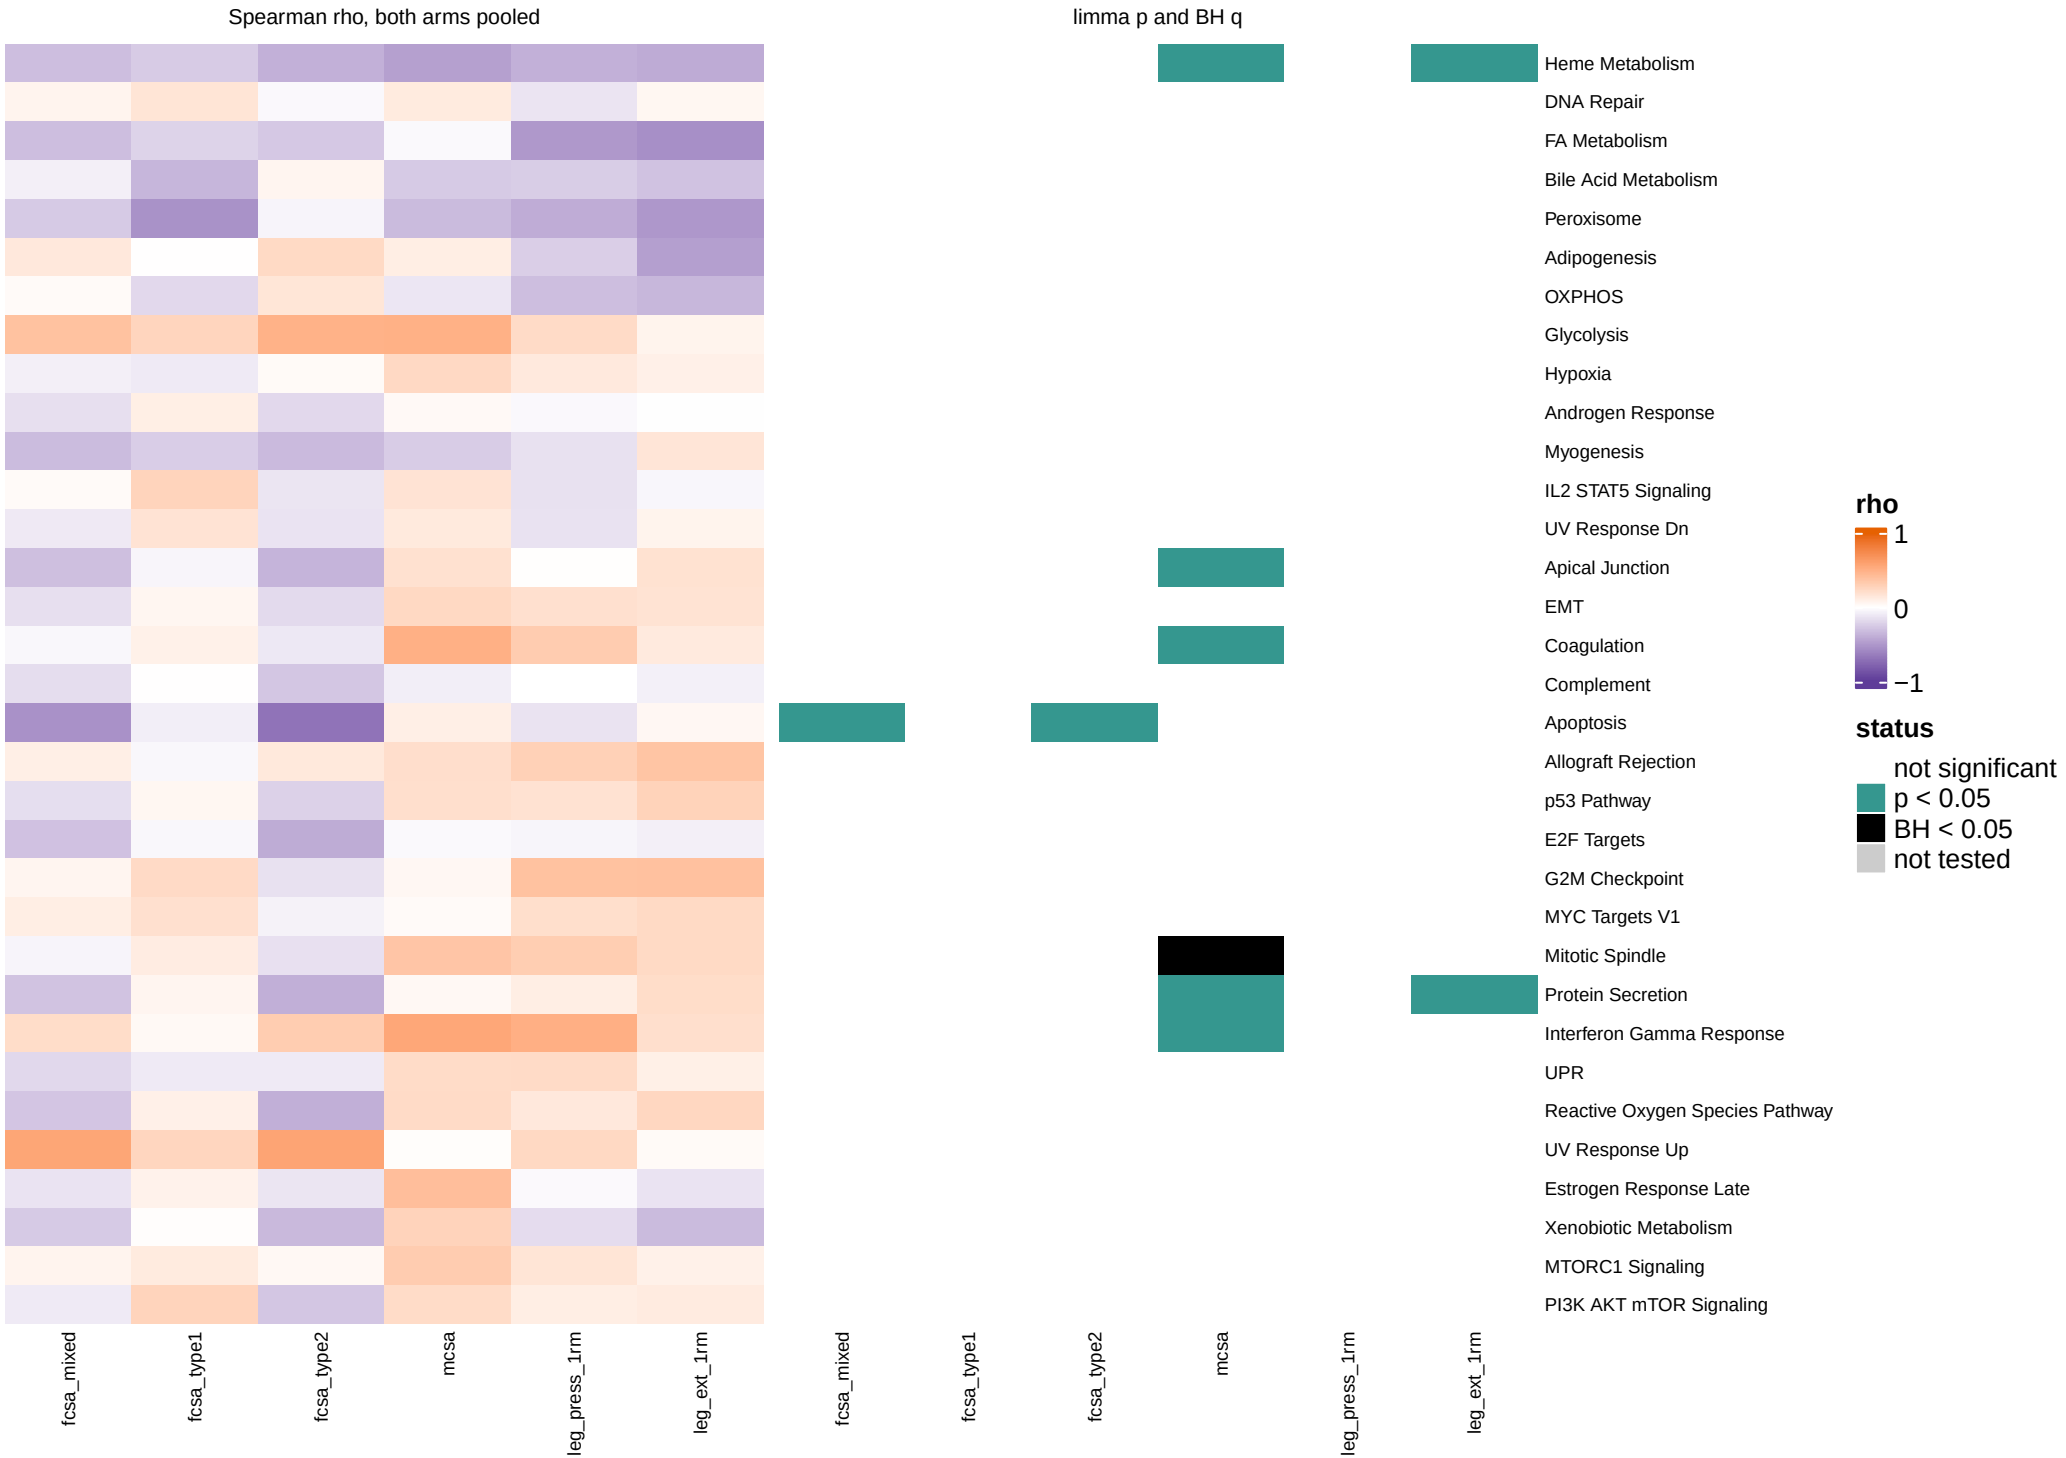


All 33 sets, one row each. Spearman rho between the singscore (T2 level) and each outcome; status from limma. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/05_associate.xlsx, change_score.

Sample model overview: Reactome

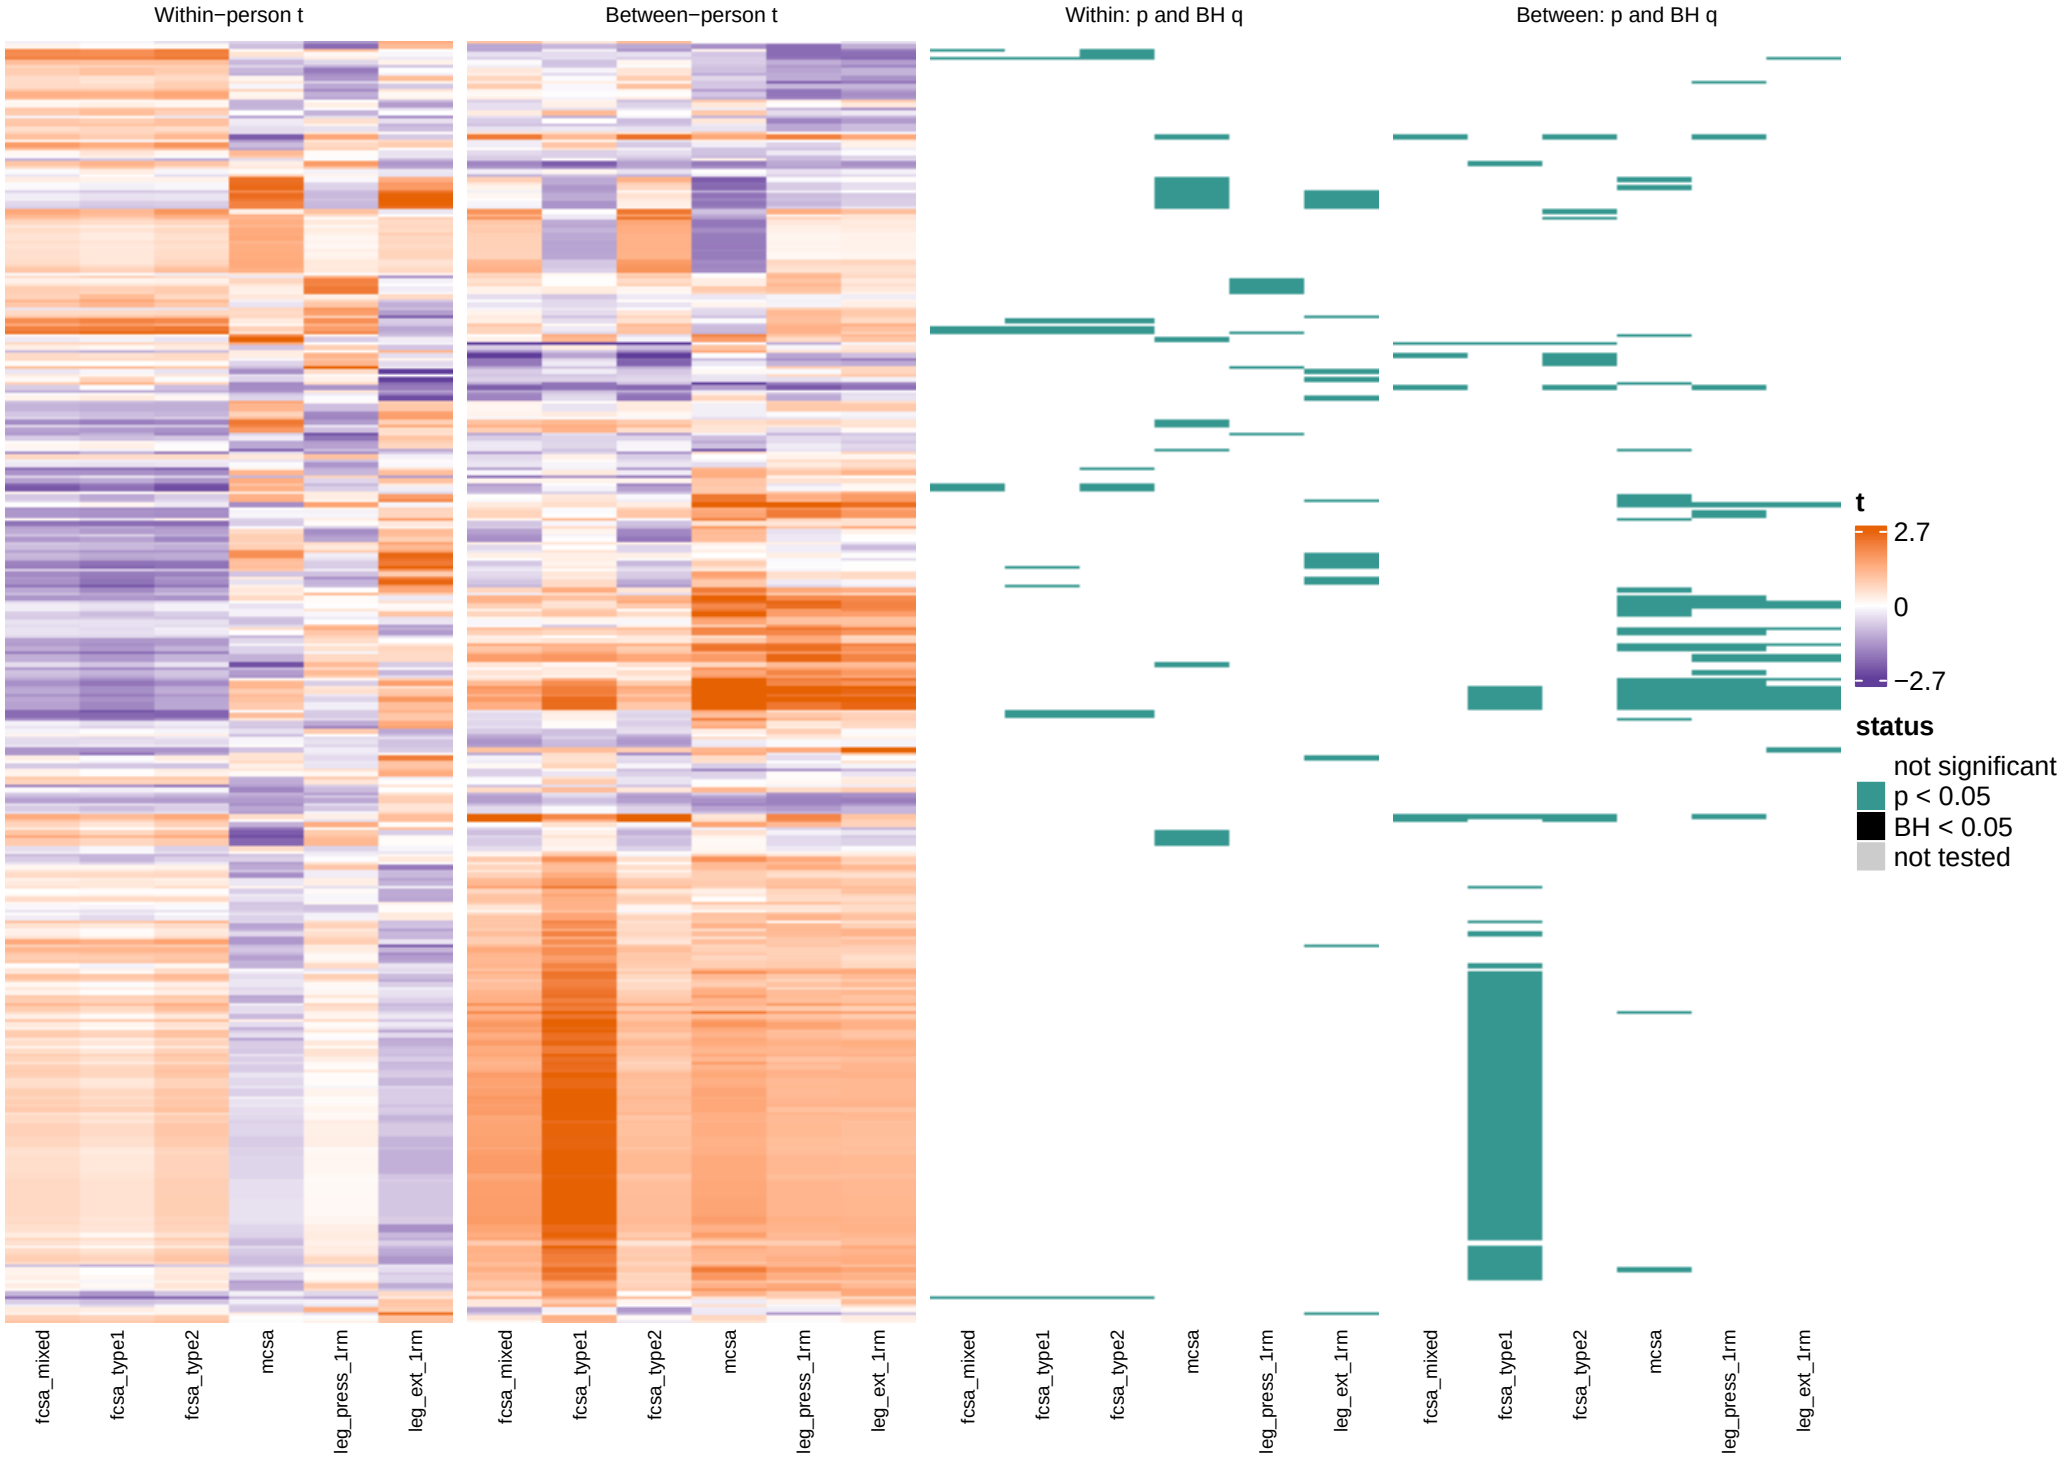


All 328 sets, one row each. Moderated t of the within and between terms, abundance ~ timepoint + between + within, subject blocked. Colours stop at the 99th percentile of |t|, 2.7. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/05_associate.xlsx, model.

Change score overview, training window: Reactome

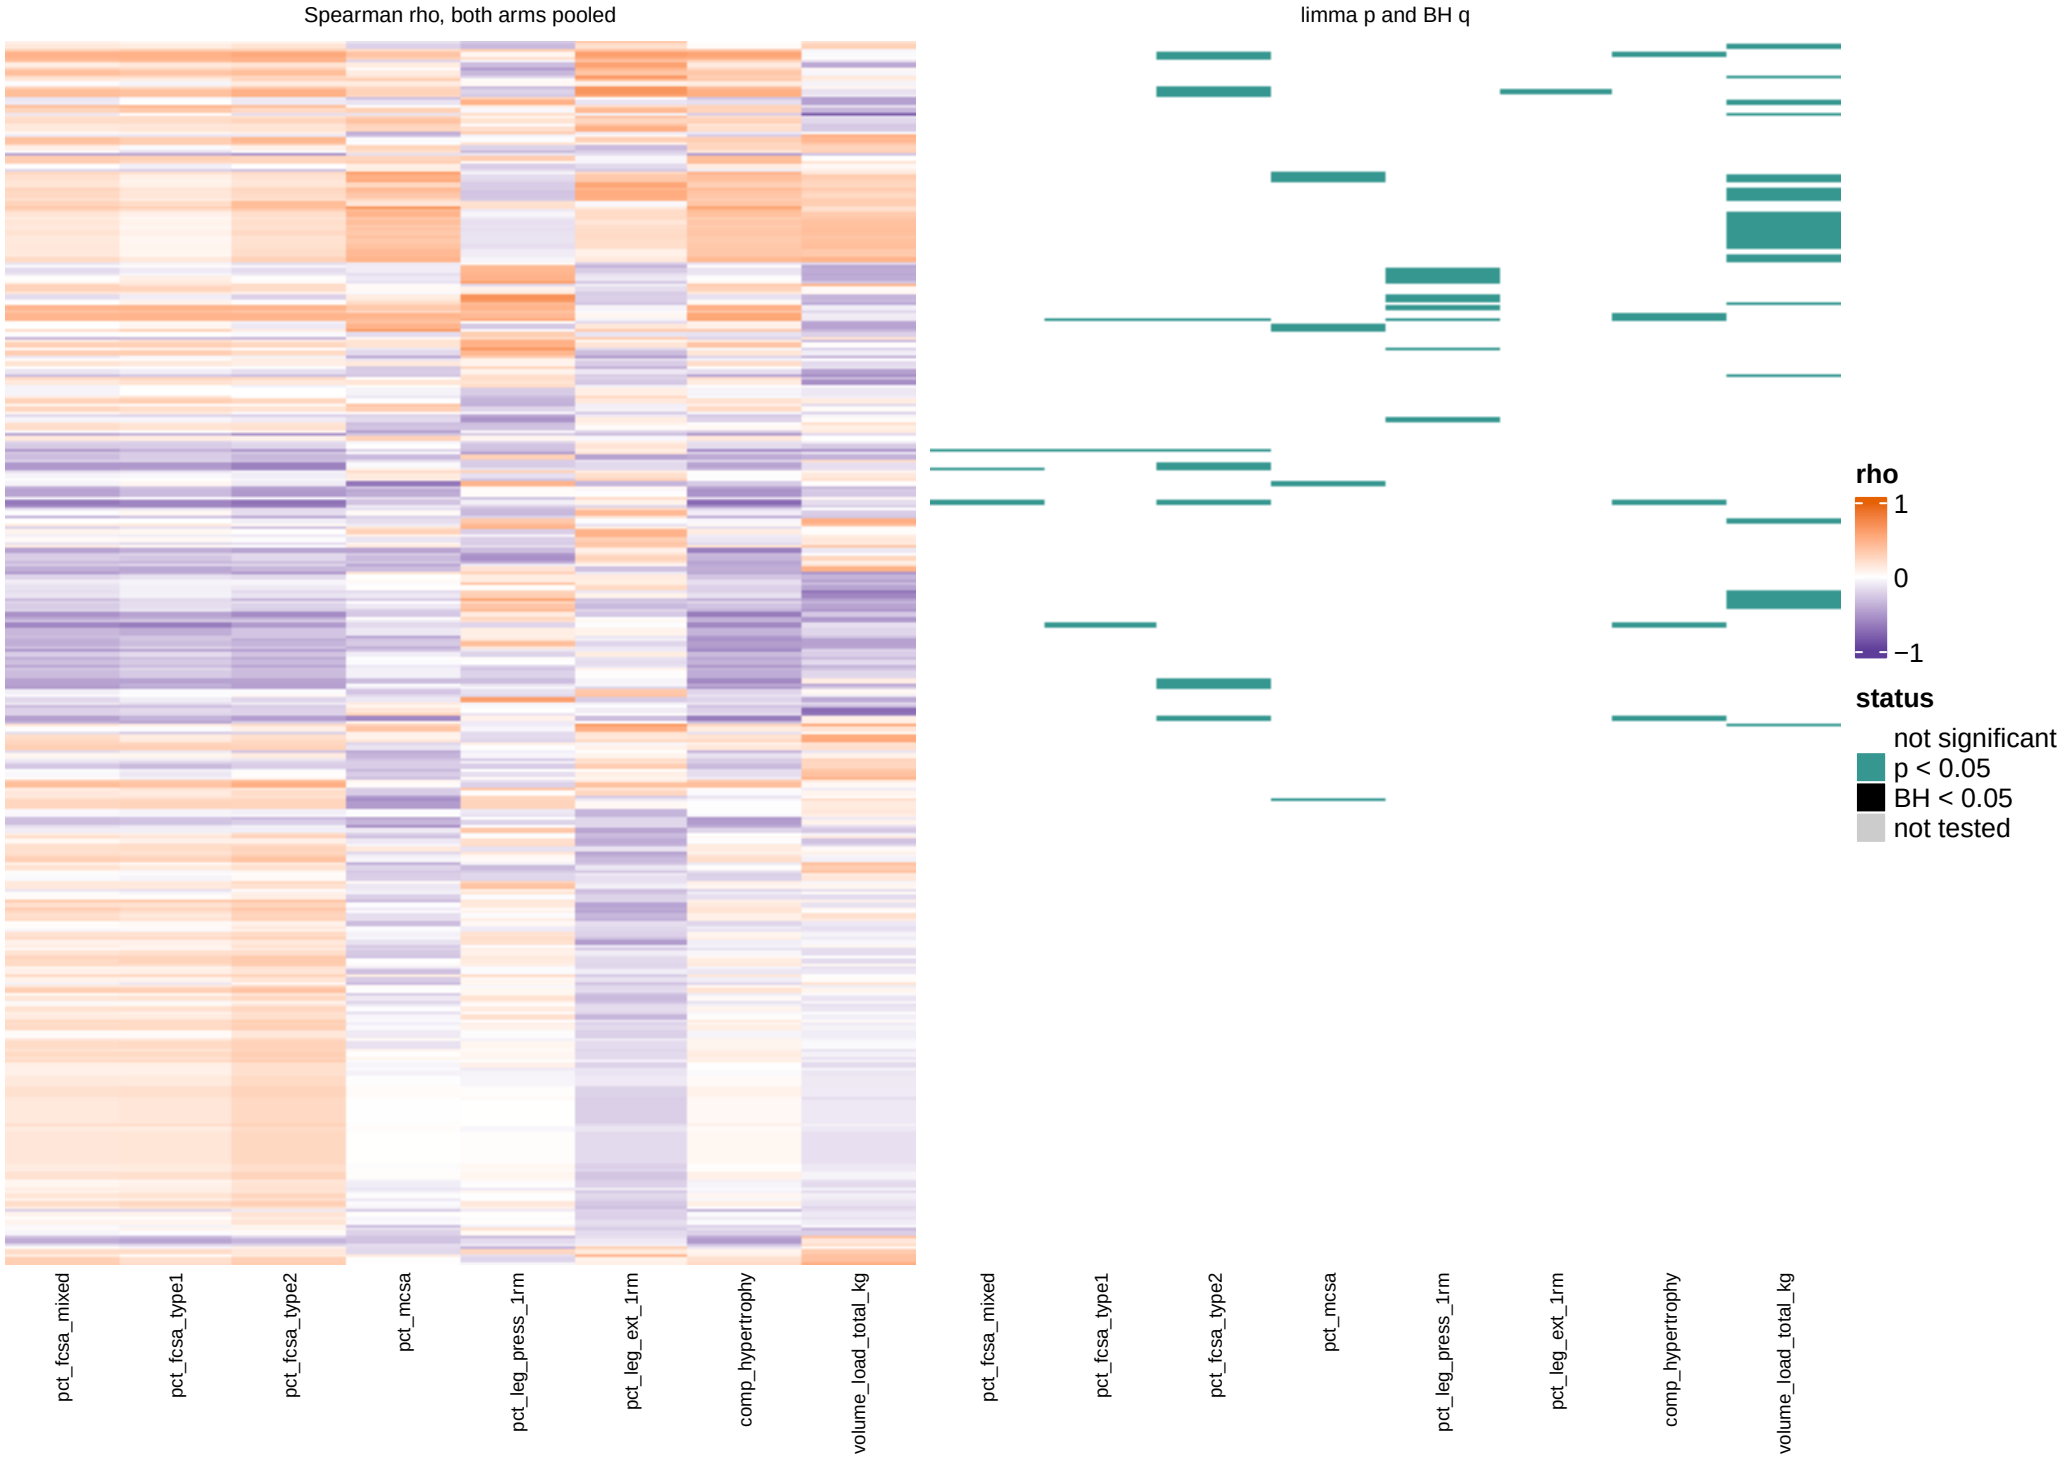


All 328 sets, one row each. Spearman rho between the singscore (change, T1 to T2) and each outcome; status from limma. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/05_associate.xlsx, change_score.

Change score overview, baseline window: Reactome

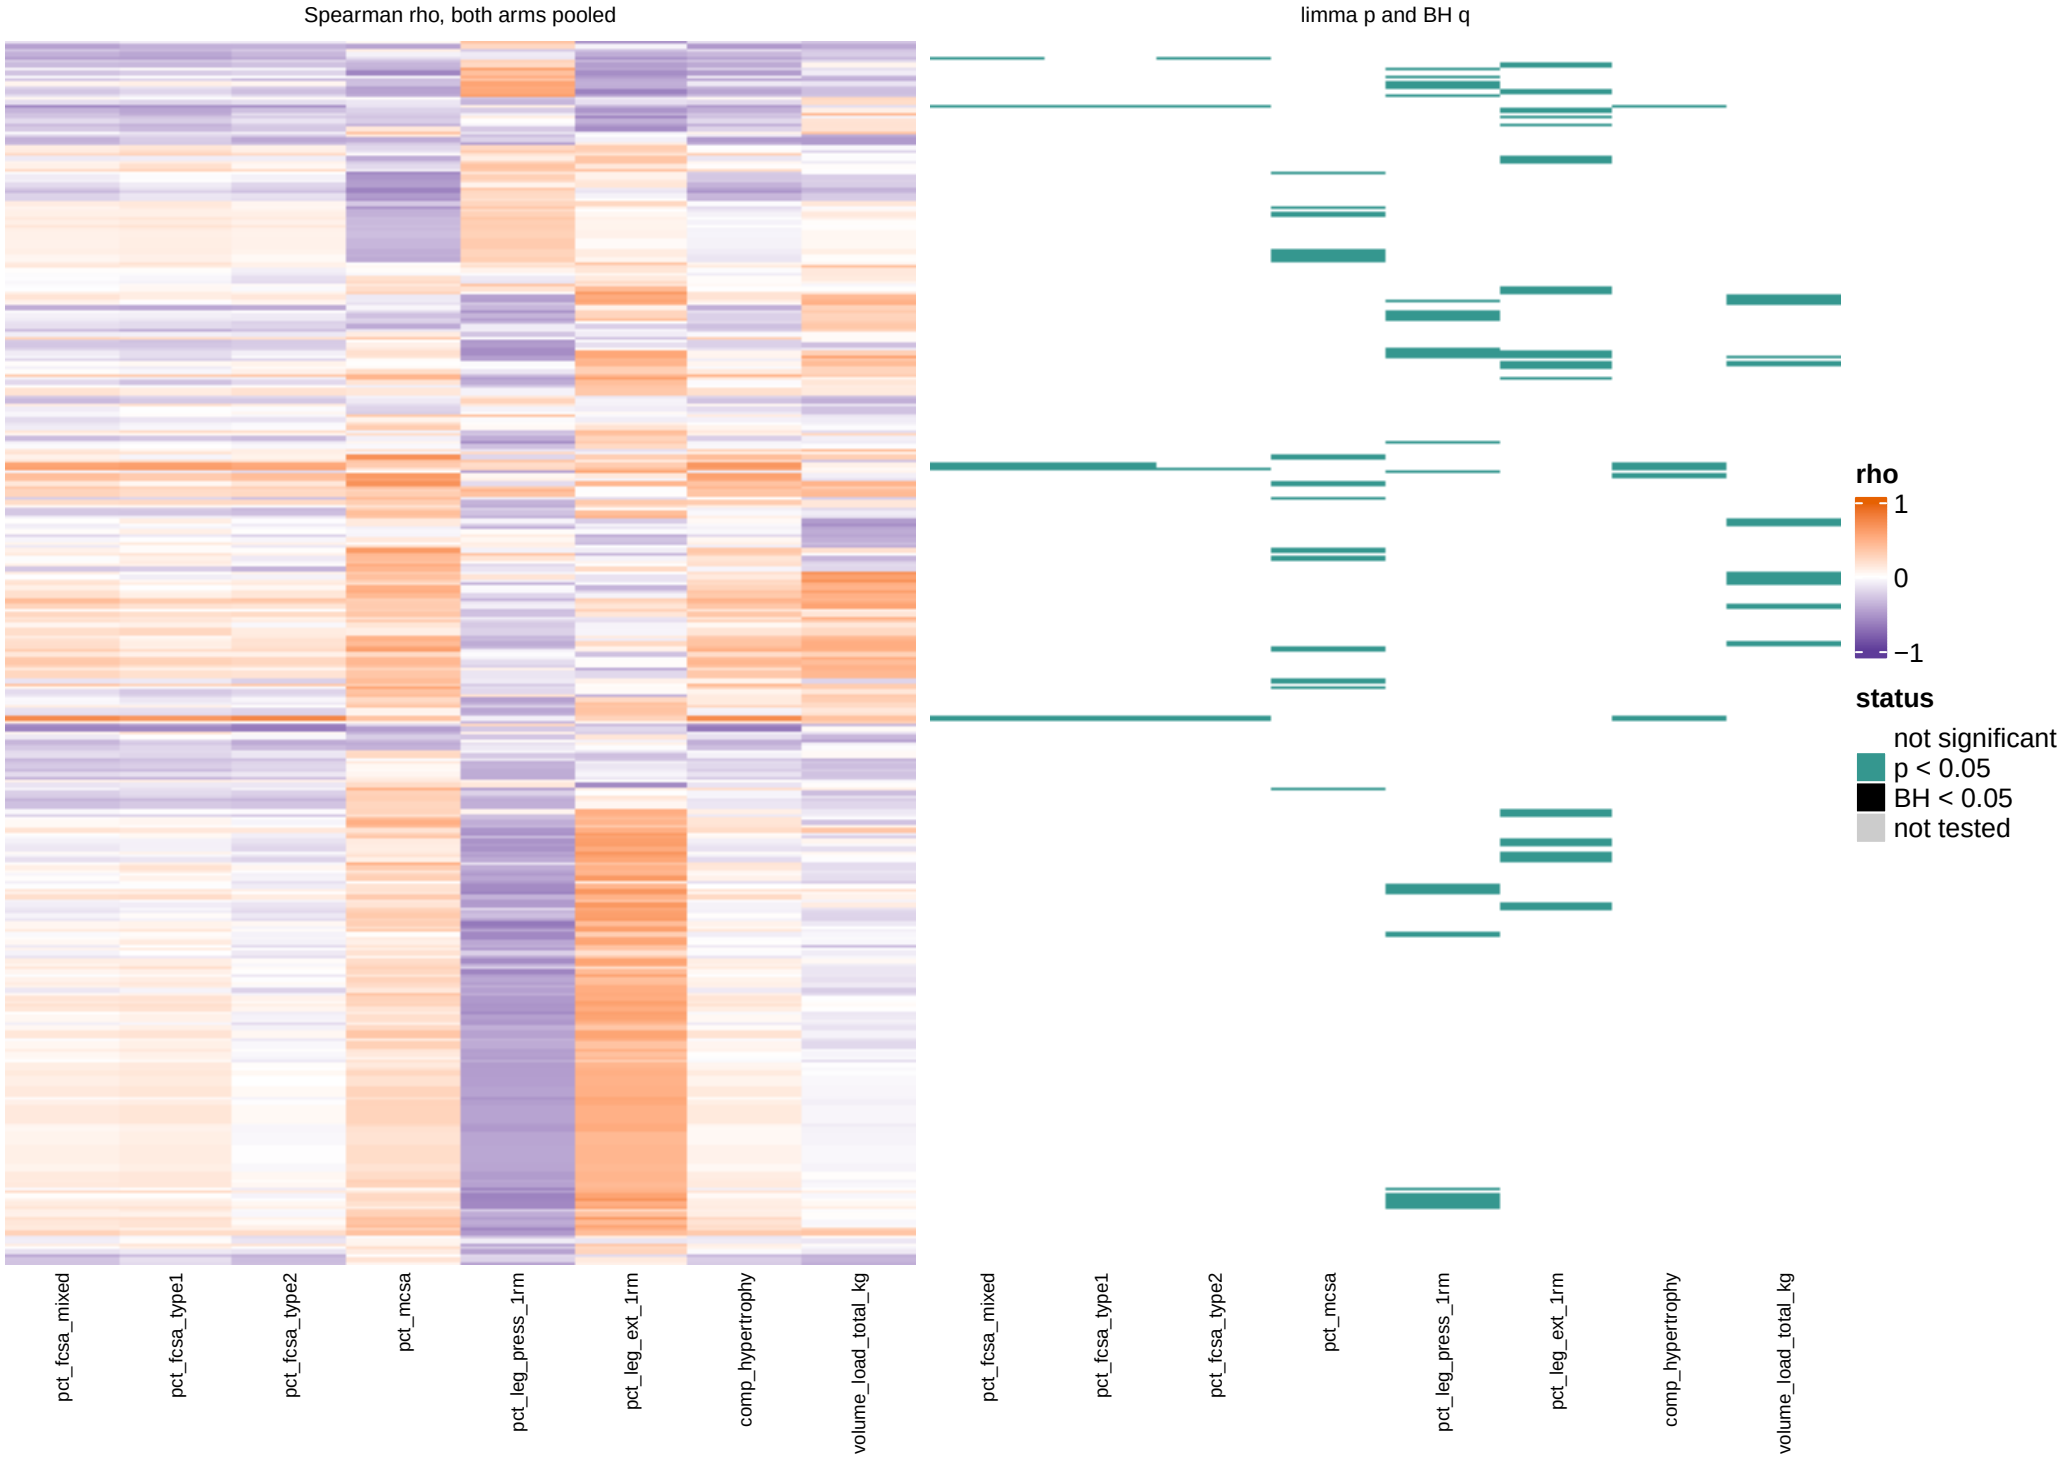


All 328 sets, one row each. Spearman rho between the singscore (T1 level) and each outcome; status from limma. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/05_associate.xlsx, change_score.

Change score overview, acute window: Reactome

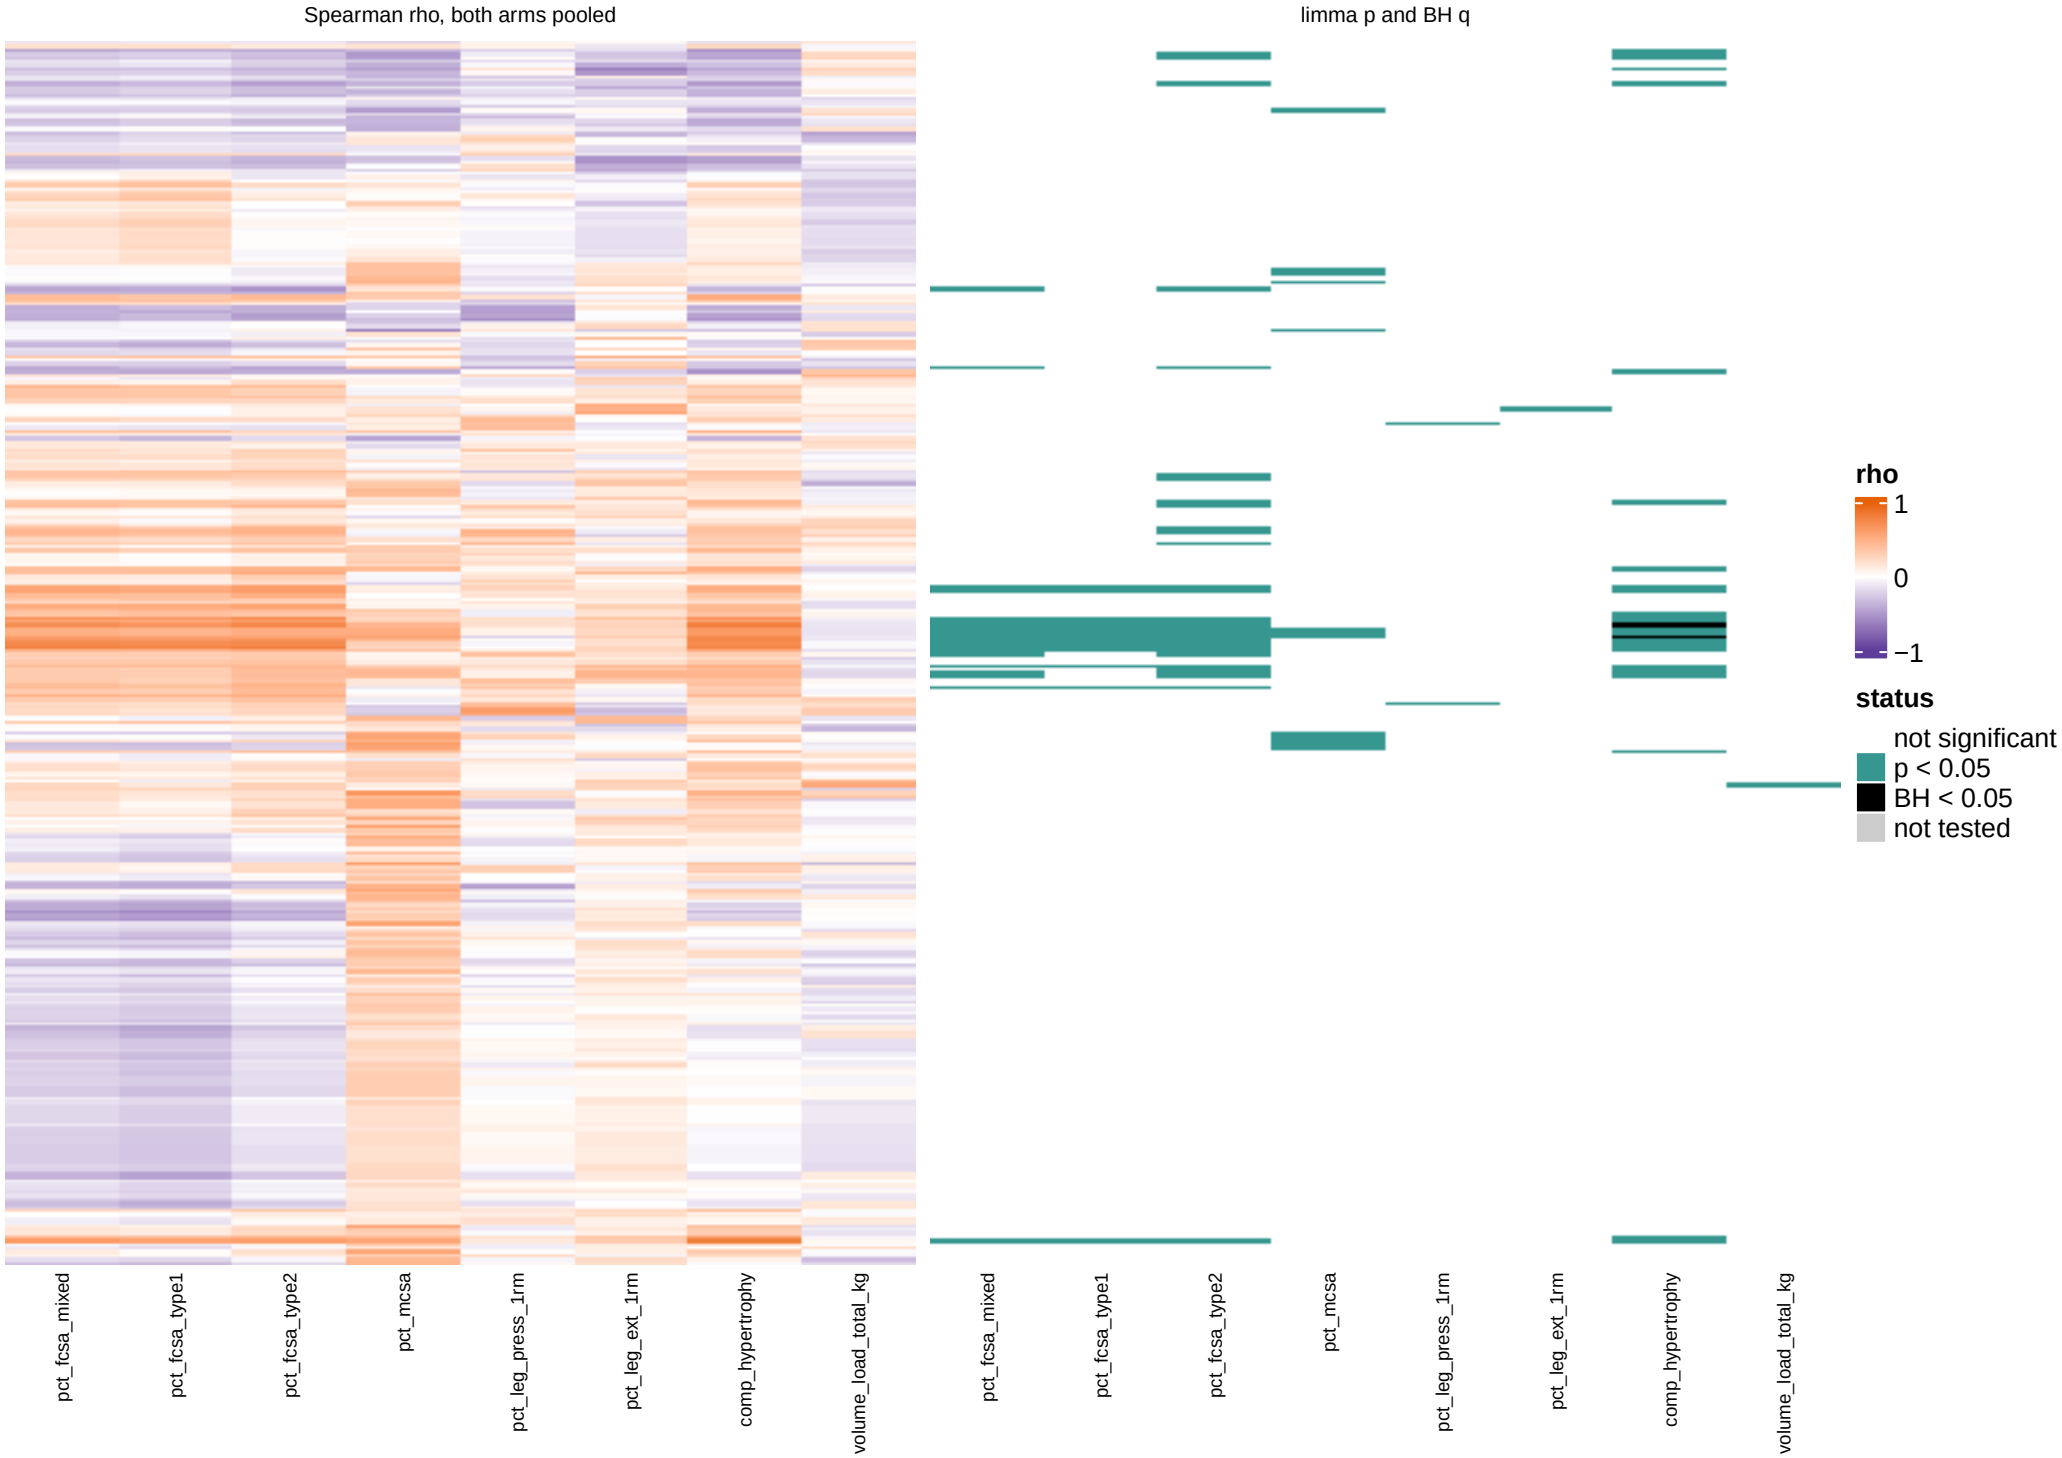


All 328 sets, one row each. Spearman rho between the singscore (change, T2 to T3) and each outcome; status from limma. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/05_associate.xlsx, change_score.

Change score overview, baseline_level window: Reactome

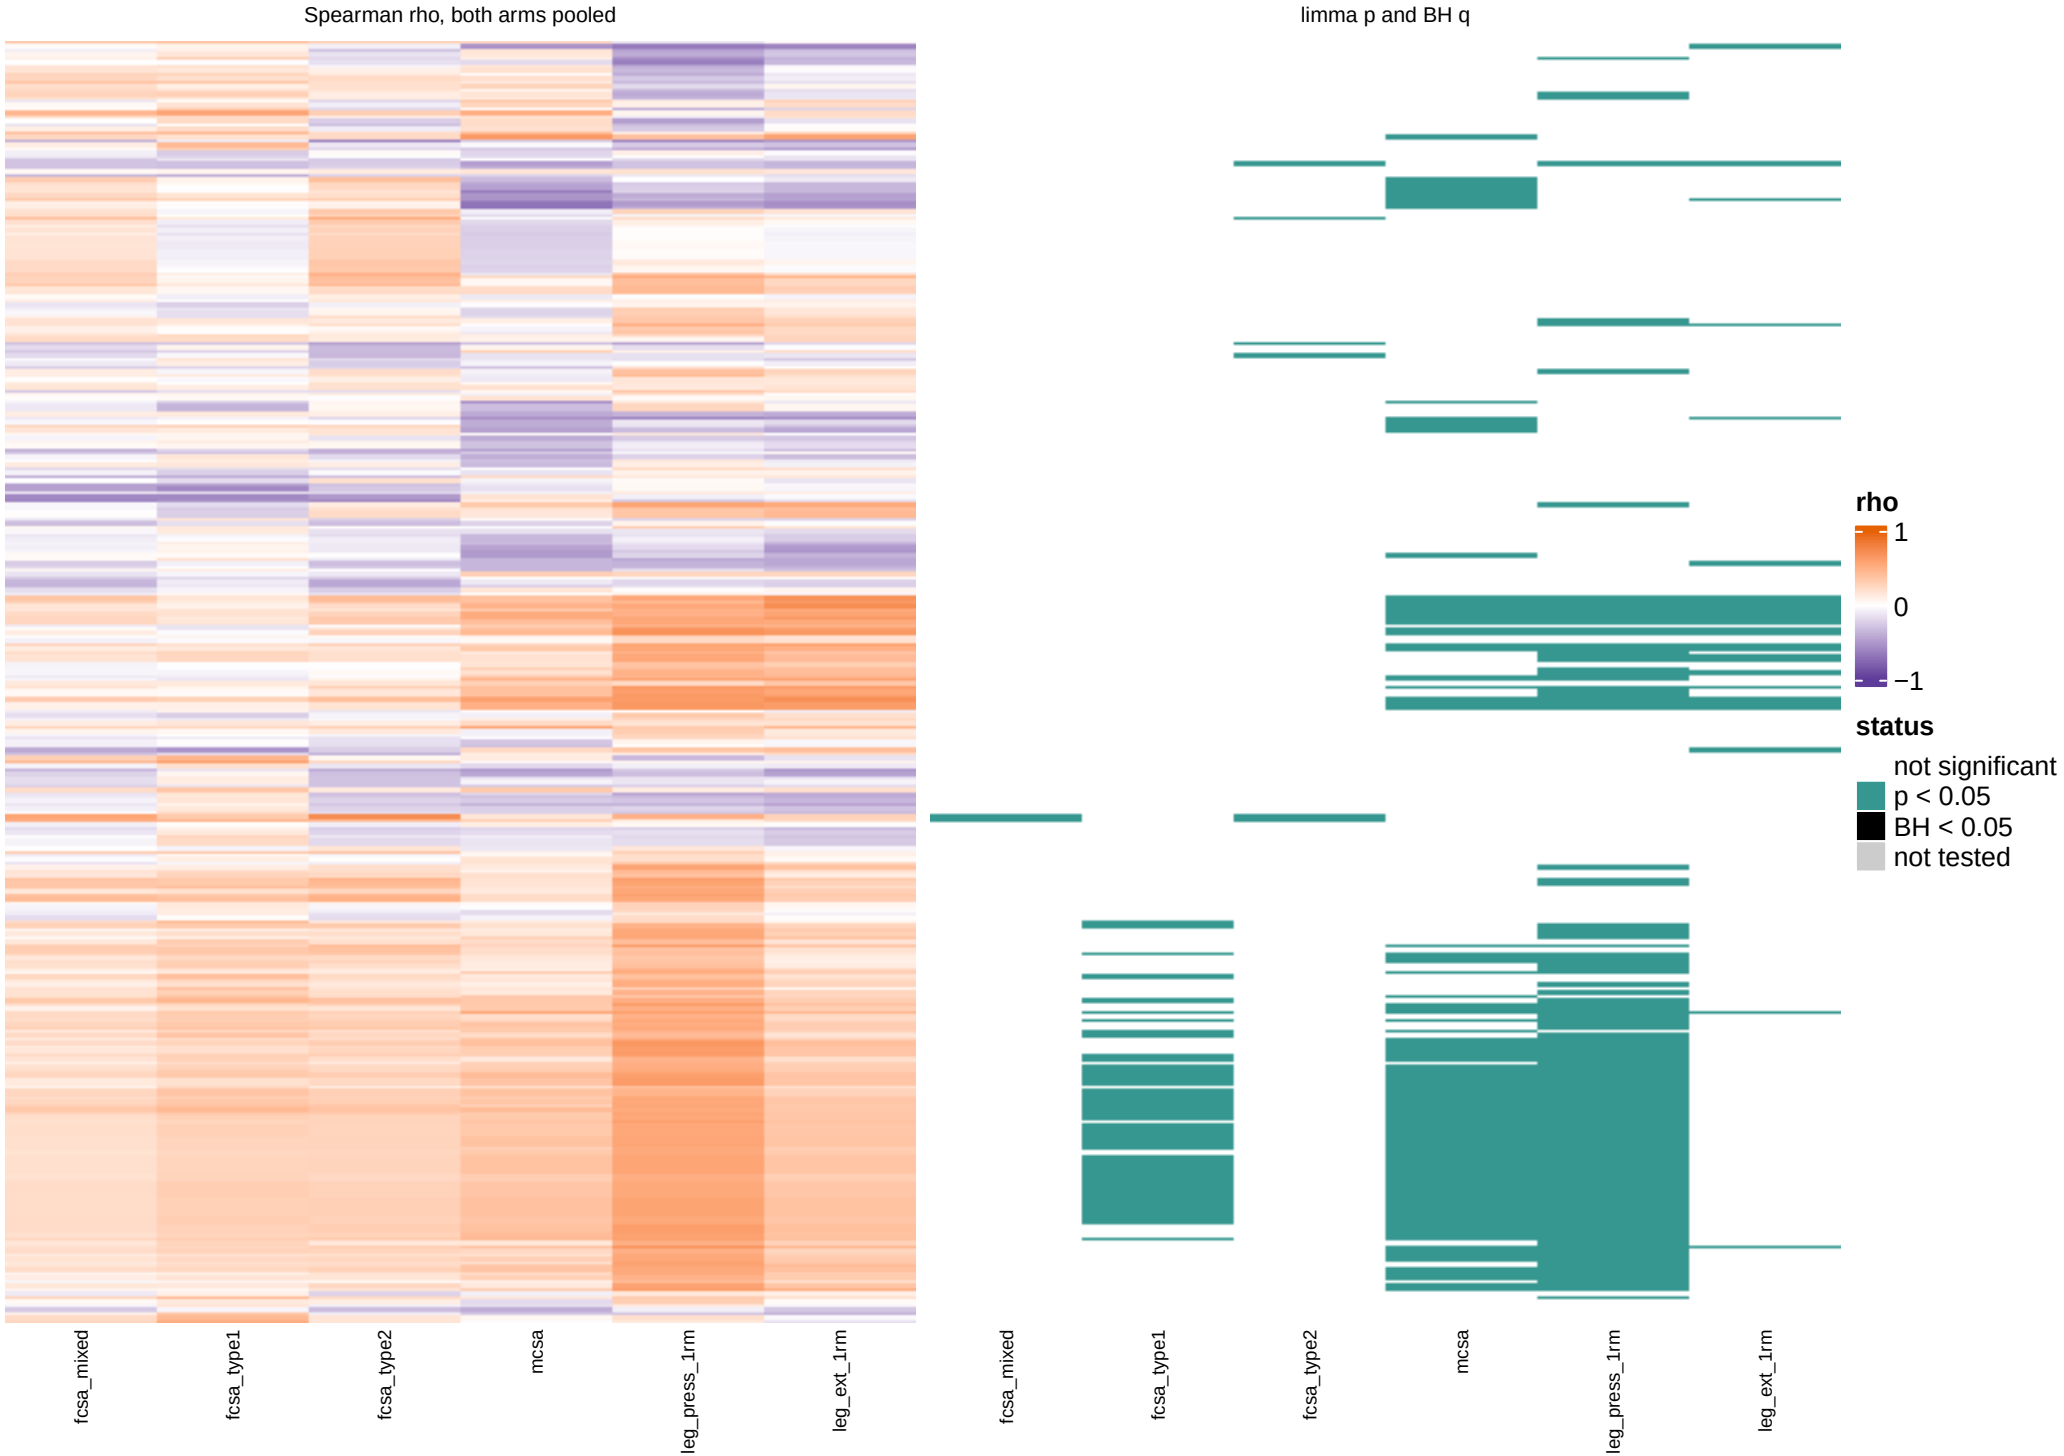


All 328 sets, one row each. Spearman rho between the singscore (T1 level) and each outcome; status from limma. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/05_associate.xlsx, change_score.

Change score overview, post_level window: Reactome

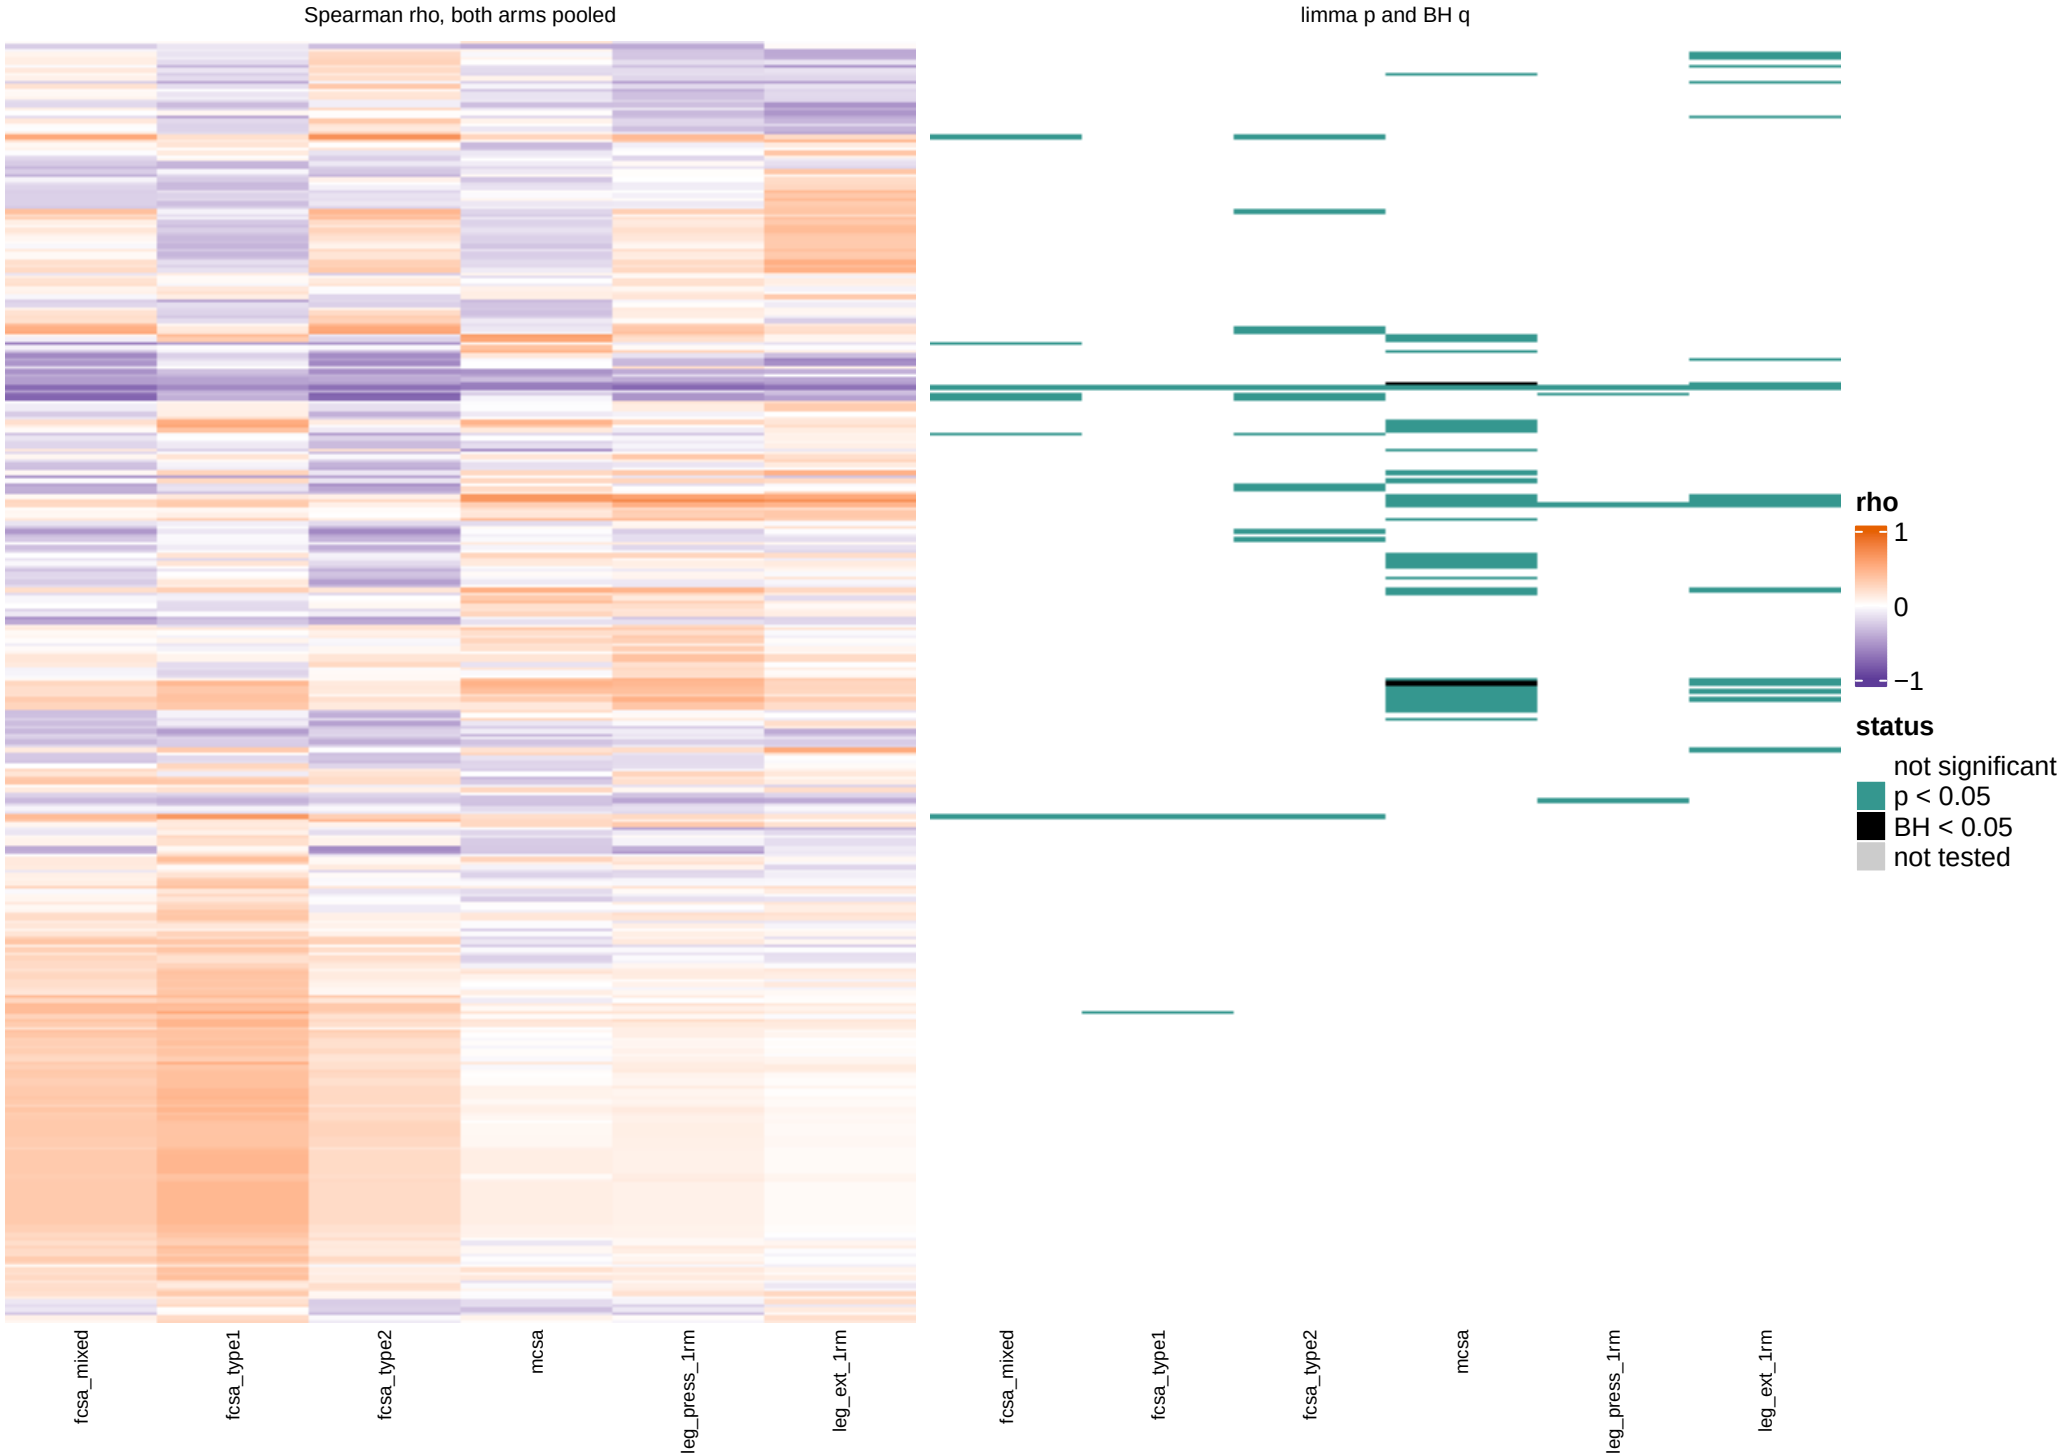

All 328 sets, one row each. Spearman rho between the singscore (T2 level) and each outcome; status from limma. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/05_associate.xlsx, change_score.

Sample model overview: KEGG_Legacy

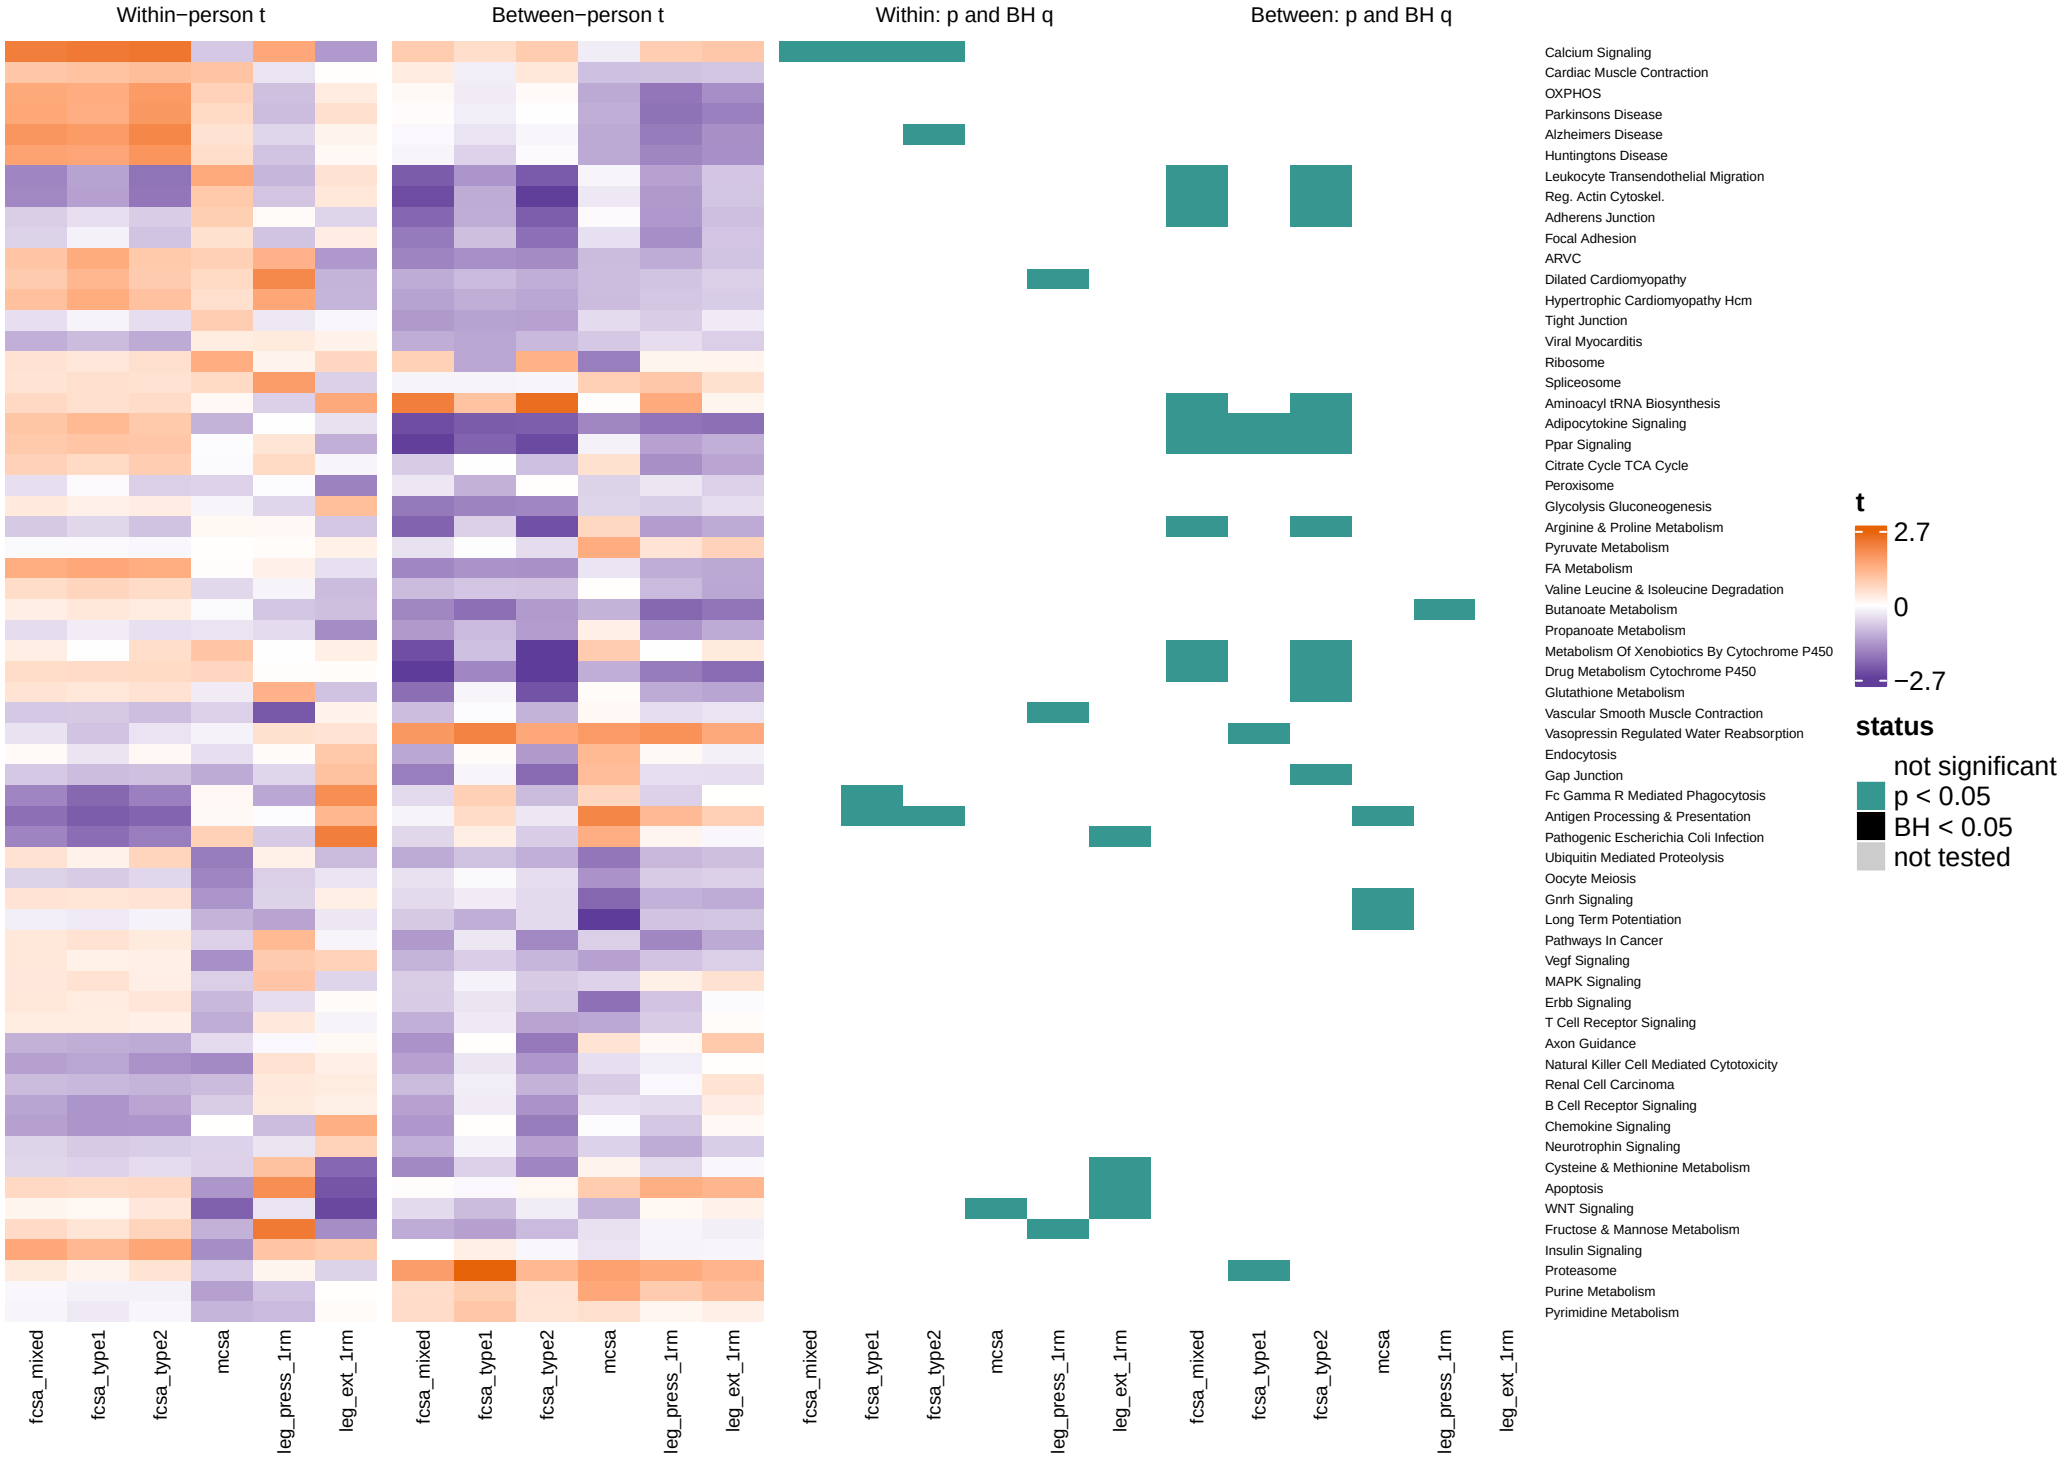


All 62 sets, one row each. Moderated t of the within and between terms, abundance ~ timepoint + between + within, subject blocked. Colours stop at the 99th percentile of |t|, 2.7. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/05_associate.xlsx, model.

Change score overview, training window: KEGG_Legacy



All 62 sets, one row each. Spearman rho between the singscore (change, T1 to T2) and each outcome; status from limma. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/05_associate.xlsx, change_score.

Change score overview, baseline window: KEGG_Legacy

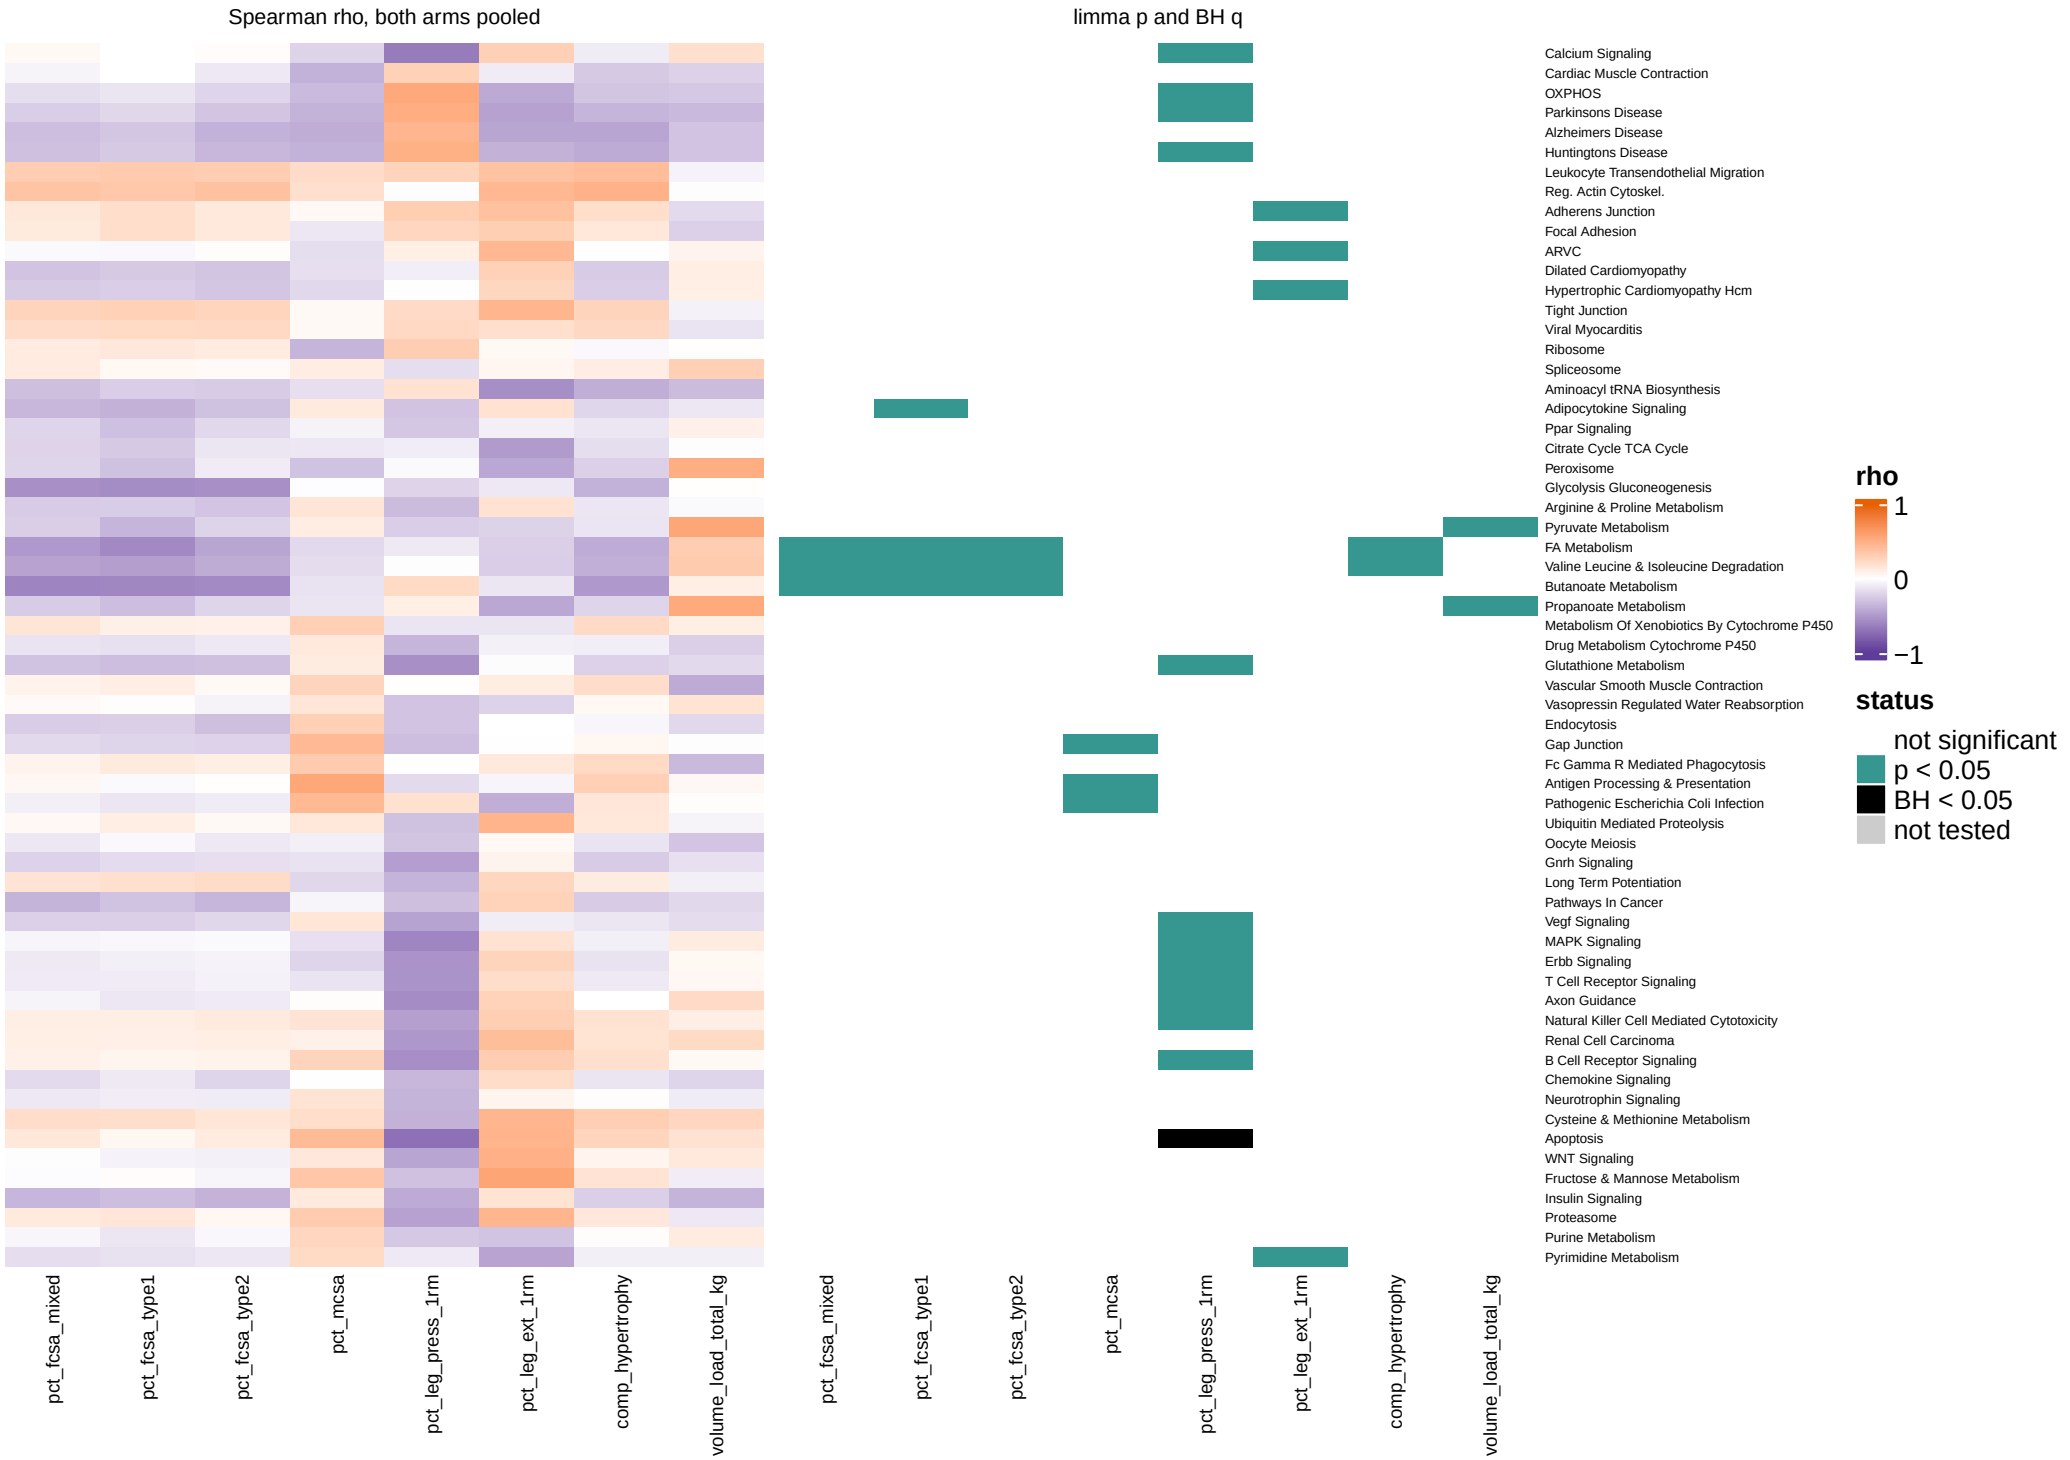

All 62 sets, one row each. Spearman rho between the singscore (T1 level) and each outcome; status from limma. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/05_associate.xlsx, change_score.

Change score overview, acute window: KEGG_Legacy



All 62 sets, one row each. Spearman rho between the singscore (change, T2 to T3) and each outcome; status from limma. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/05_associate.xlsx, change_score.

Change score overview, baseline_level window: KEGG_Legacy




All 62 sets, one row each. Spearman rho between the singscore (T1 level) and each outcome; status from limma. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/05_associate.xlsx, change_score.

Change score overview, post_level window: KEGG_Legacy




All 62 sets, one row each. Spearman rho between the singscore (T2 level) and each outcome; status from limma. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/05_associate.xlsx, change_score.

Sample model overview: GOBP

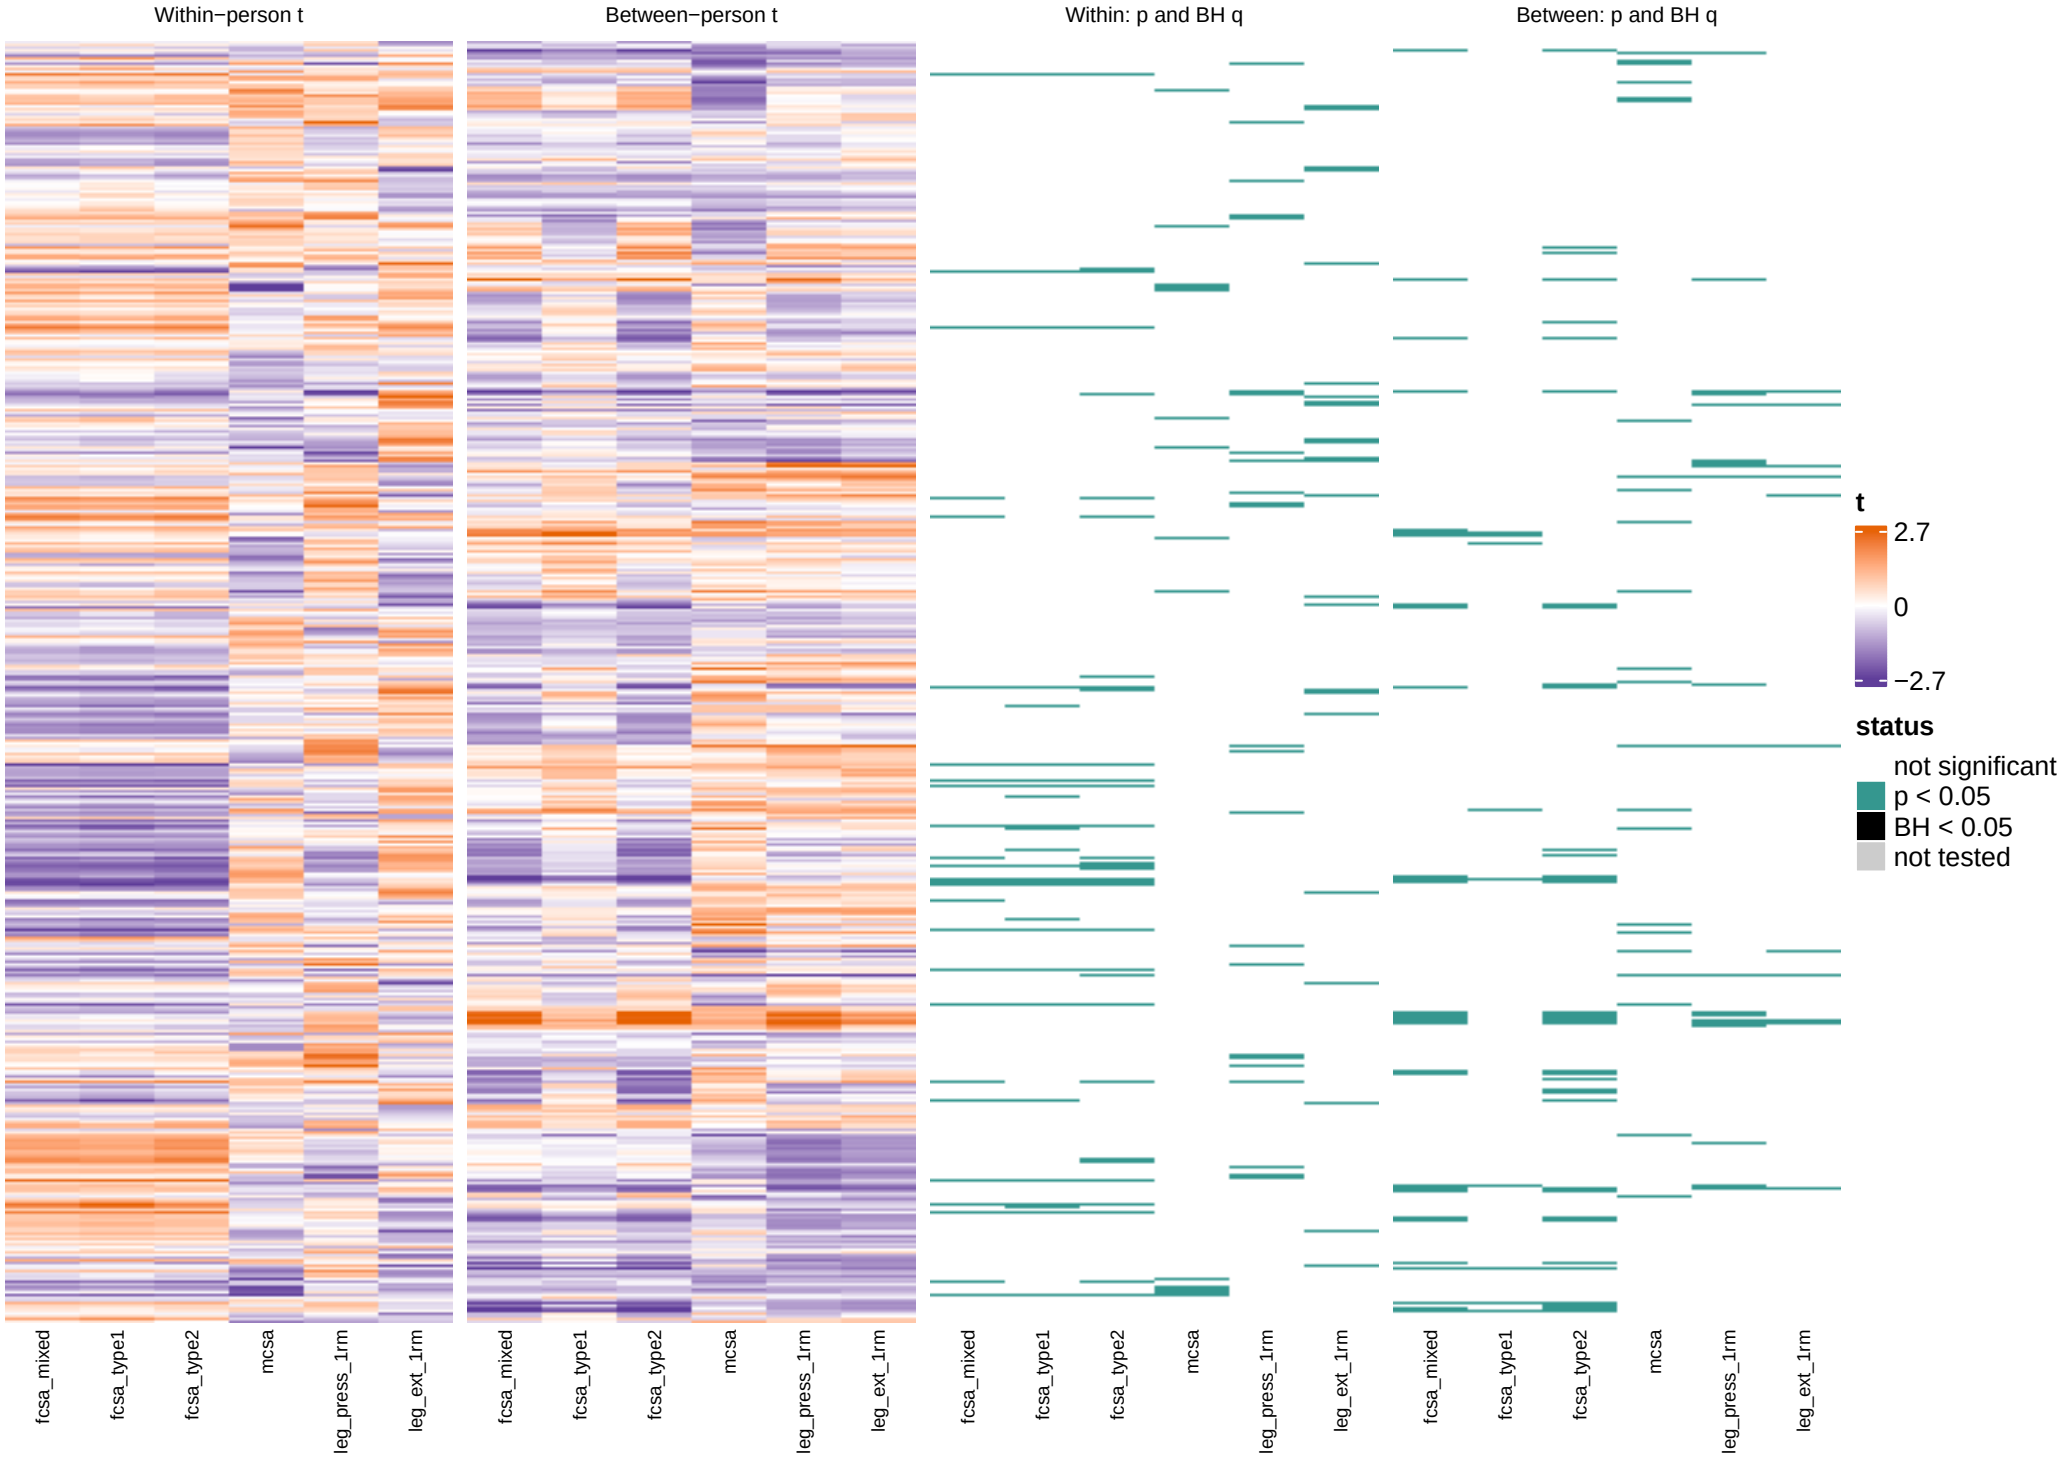


All 897 sets, one row each. Moderated t of the within and between terms, abundance ~ timepoint + between + within, subject blocked. Colours stop at the 99th percentile of |t|, 2.7. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/05_associate.xlsx, model.

Change score overview, training window: GOBP

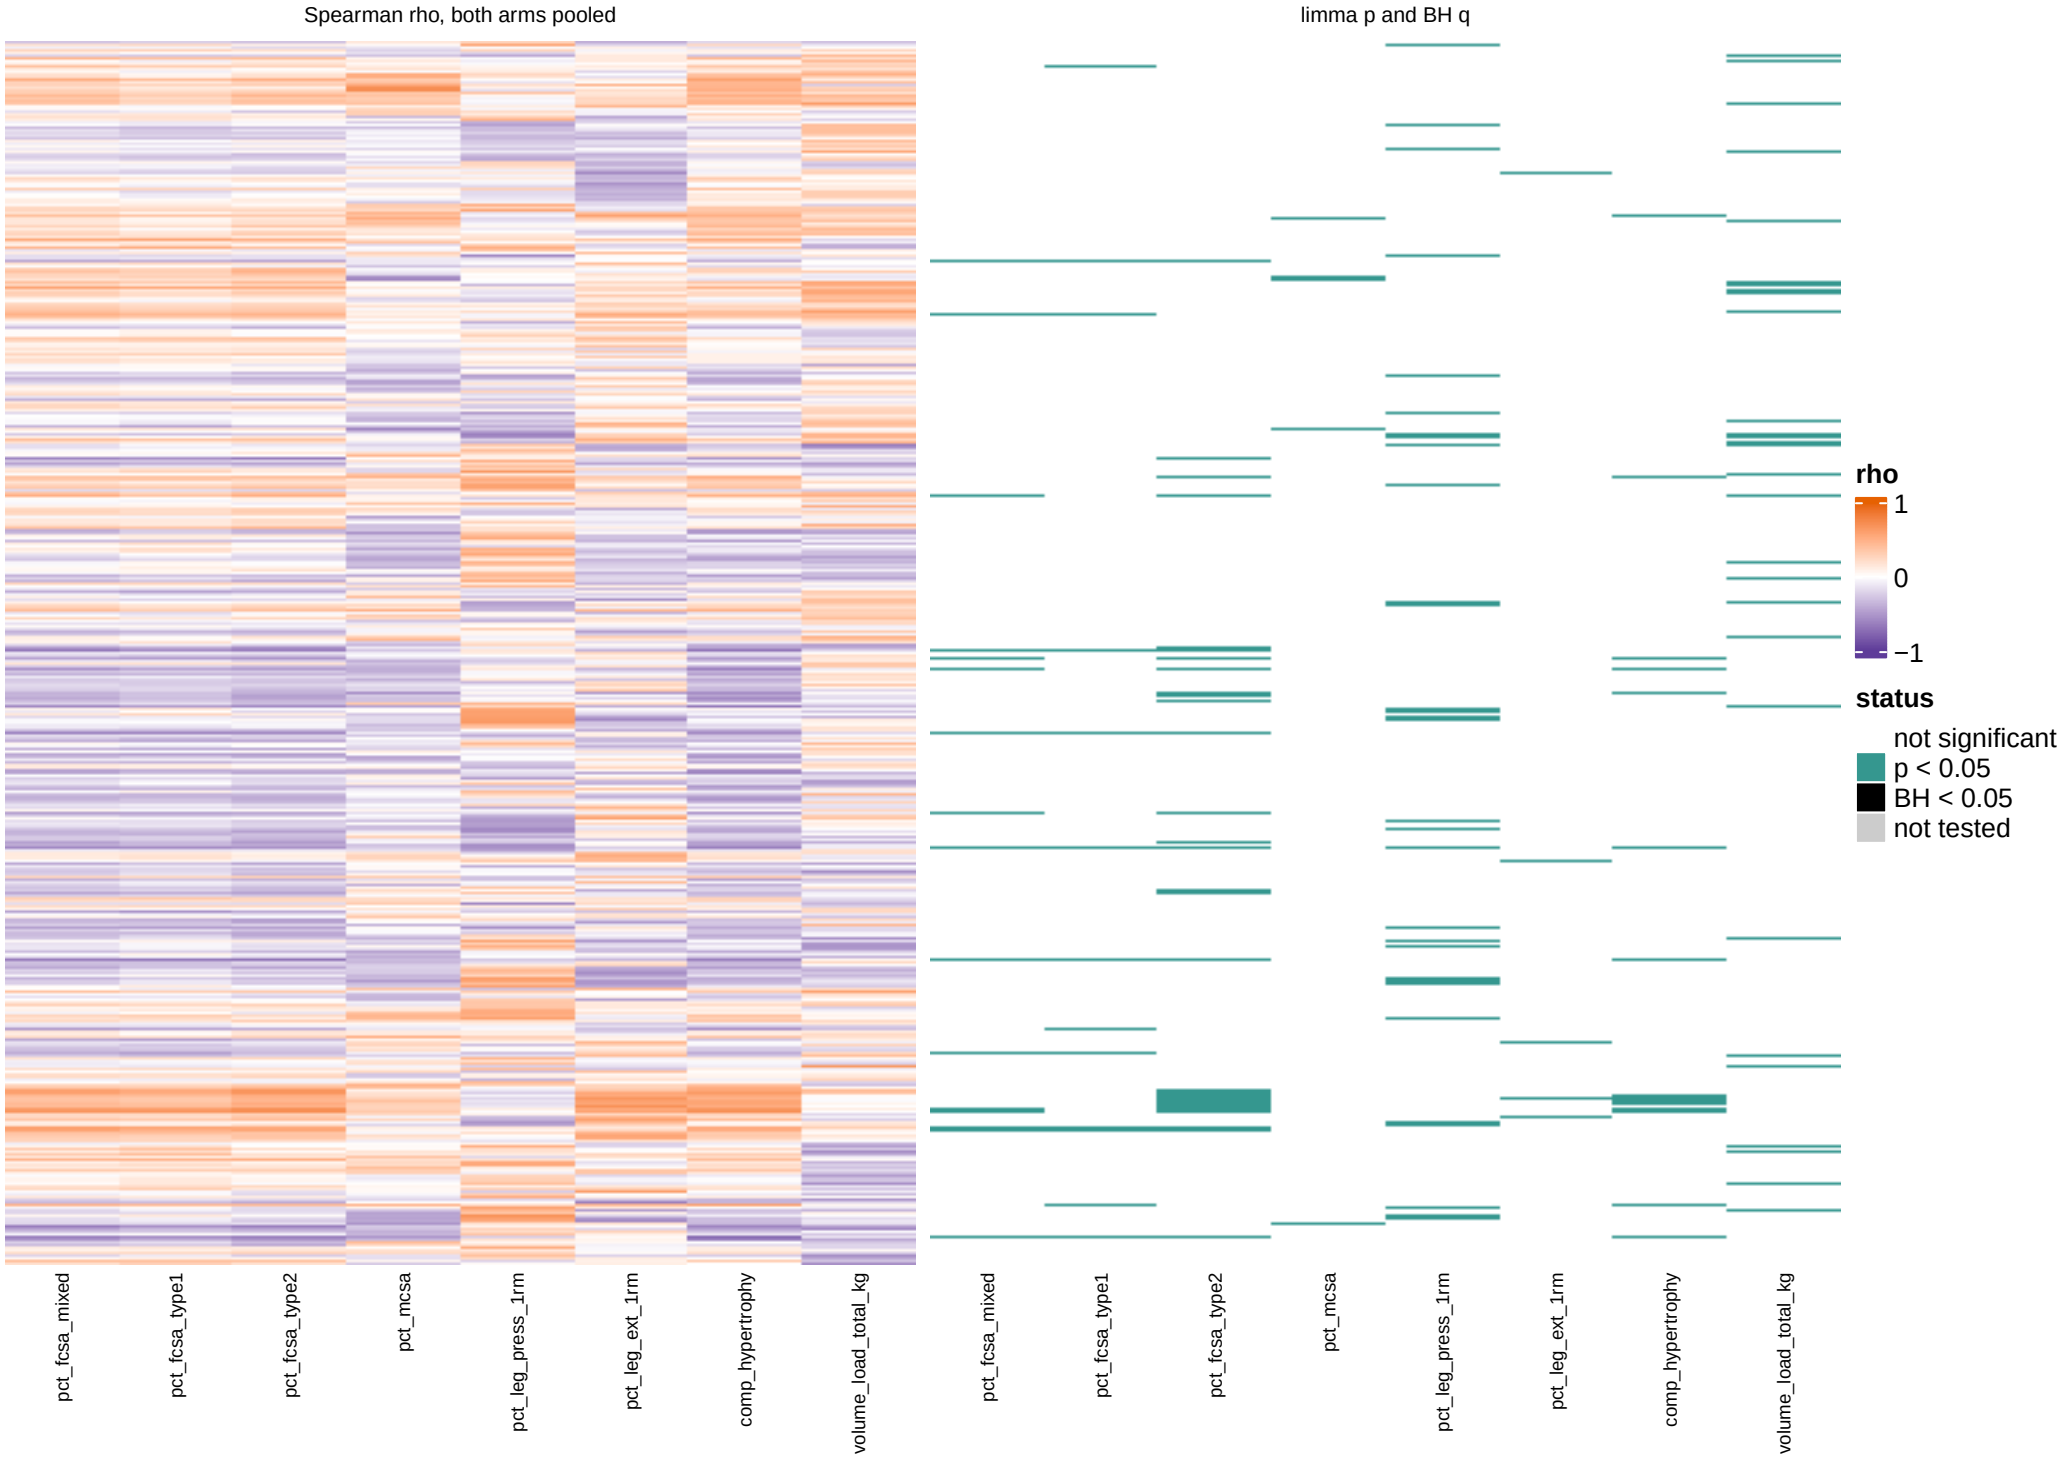


All 897 sets, one row each. Spearman rho between the singscore (change, T1 to T2) and each outcome; status from limma. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/05_associate.xlsx, change_score.

Change score overview, baseline window: GOBP

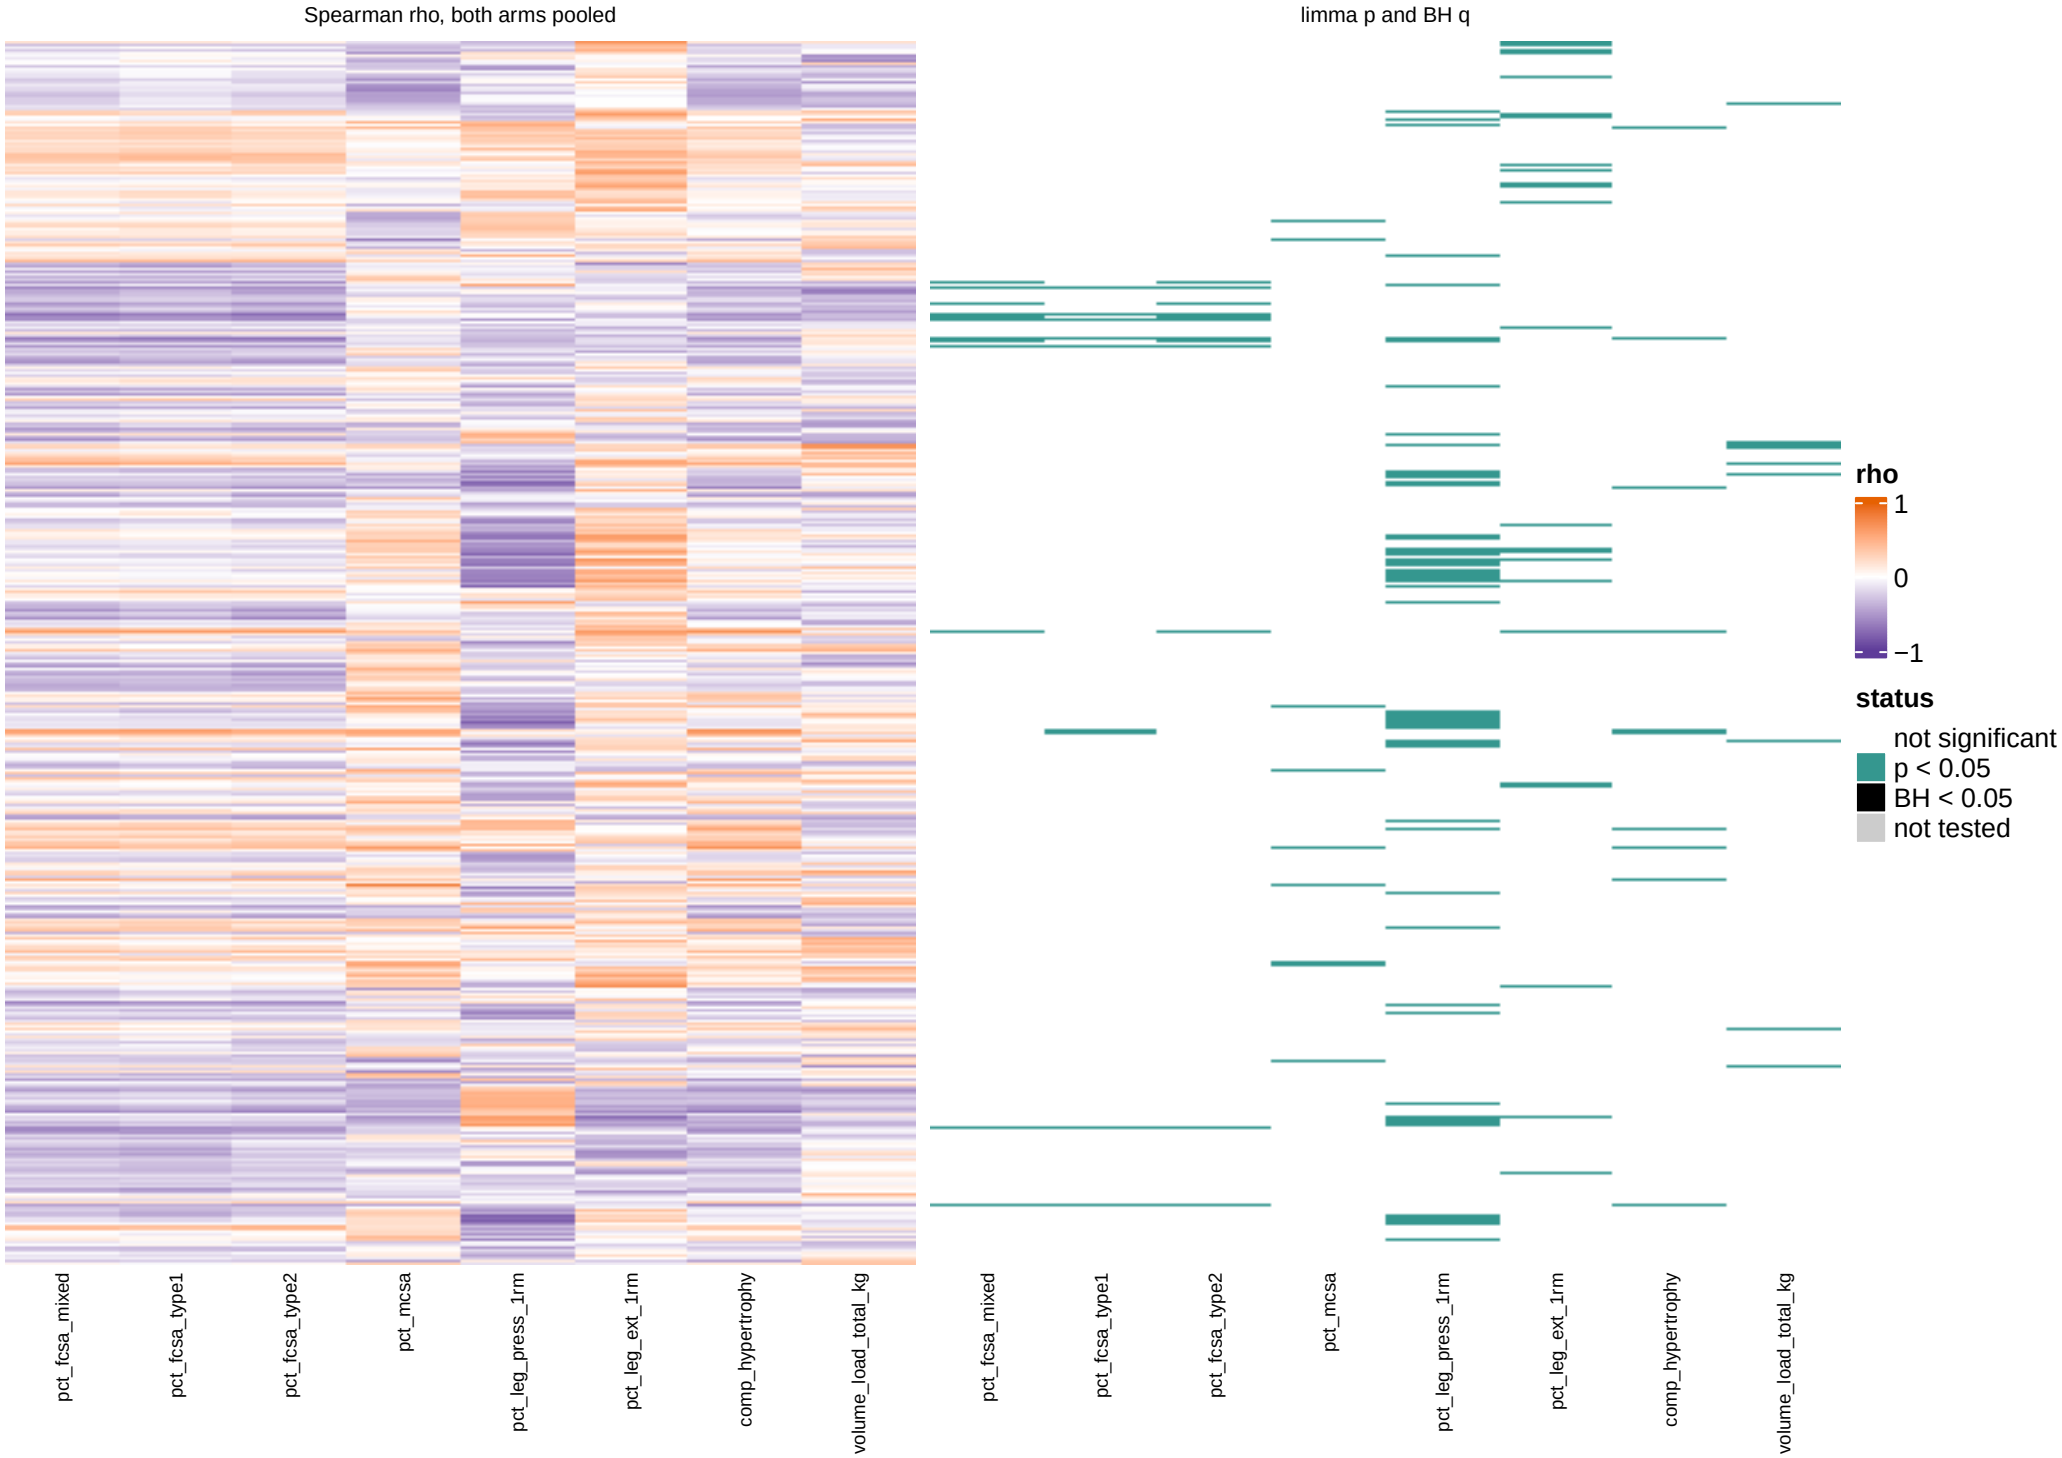


All 897 sets, one row each. Spearman rho between the singscore (T1 level) and each outcome; status from limma. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/05_associate.xlsx, change_score.

Change score overview, acute window: GOBP

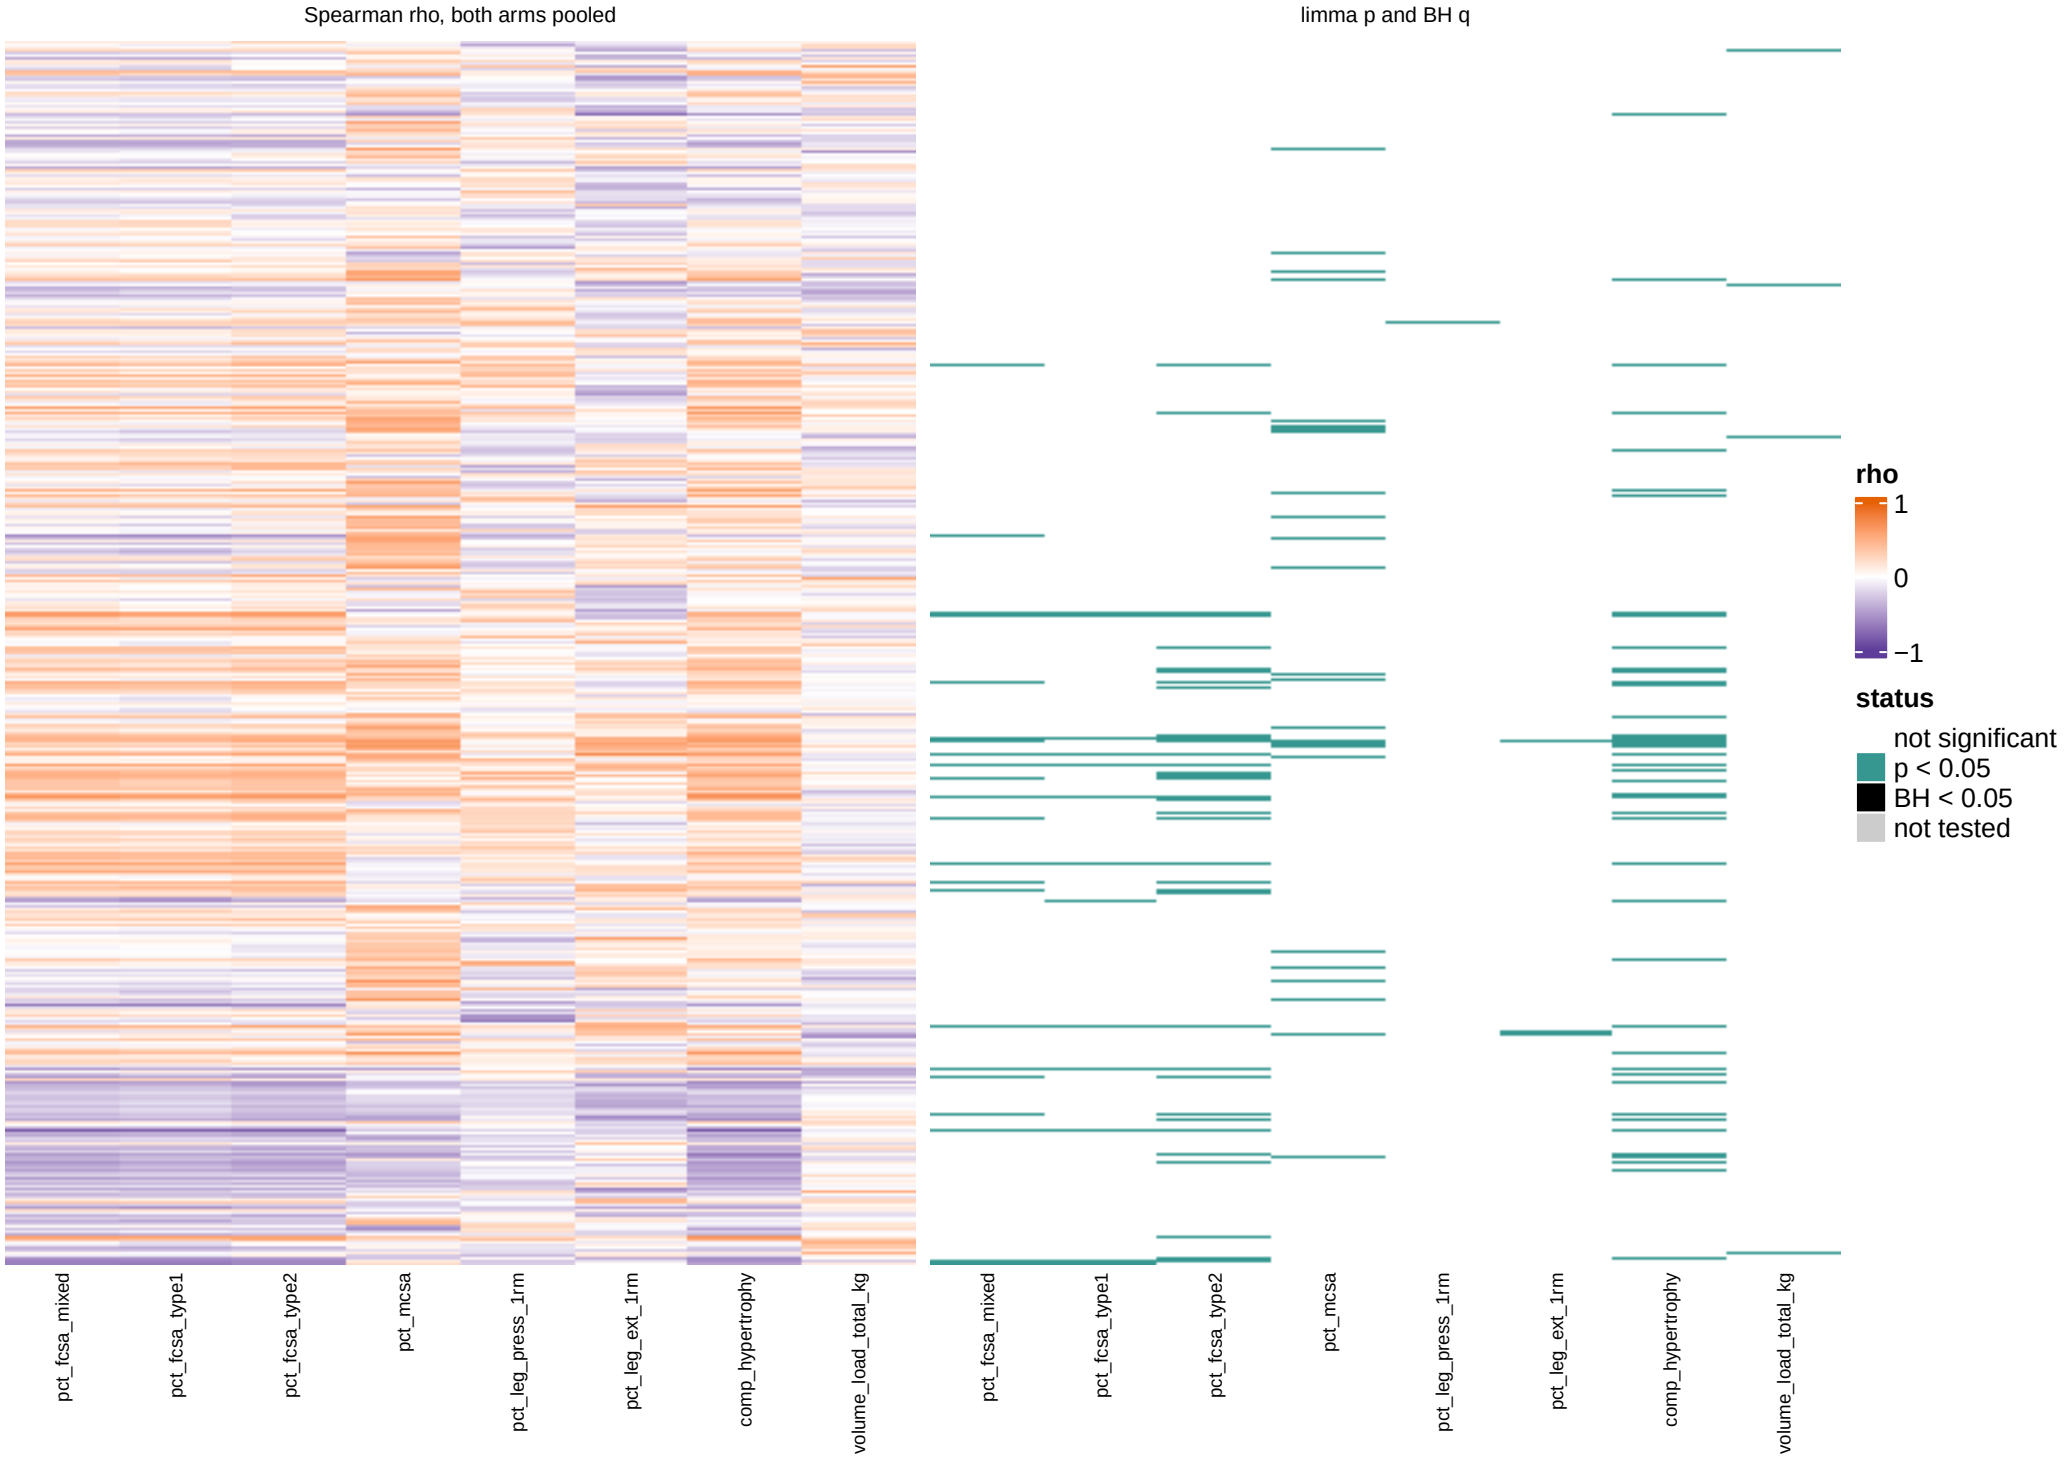


All 897 sets, one row each. Spearman rho between the singscore (change, T2 to T3) and each outcome; status from limma. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/05_associate.xlsx, change_score.

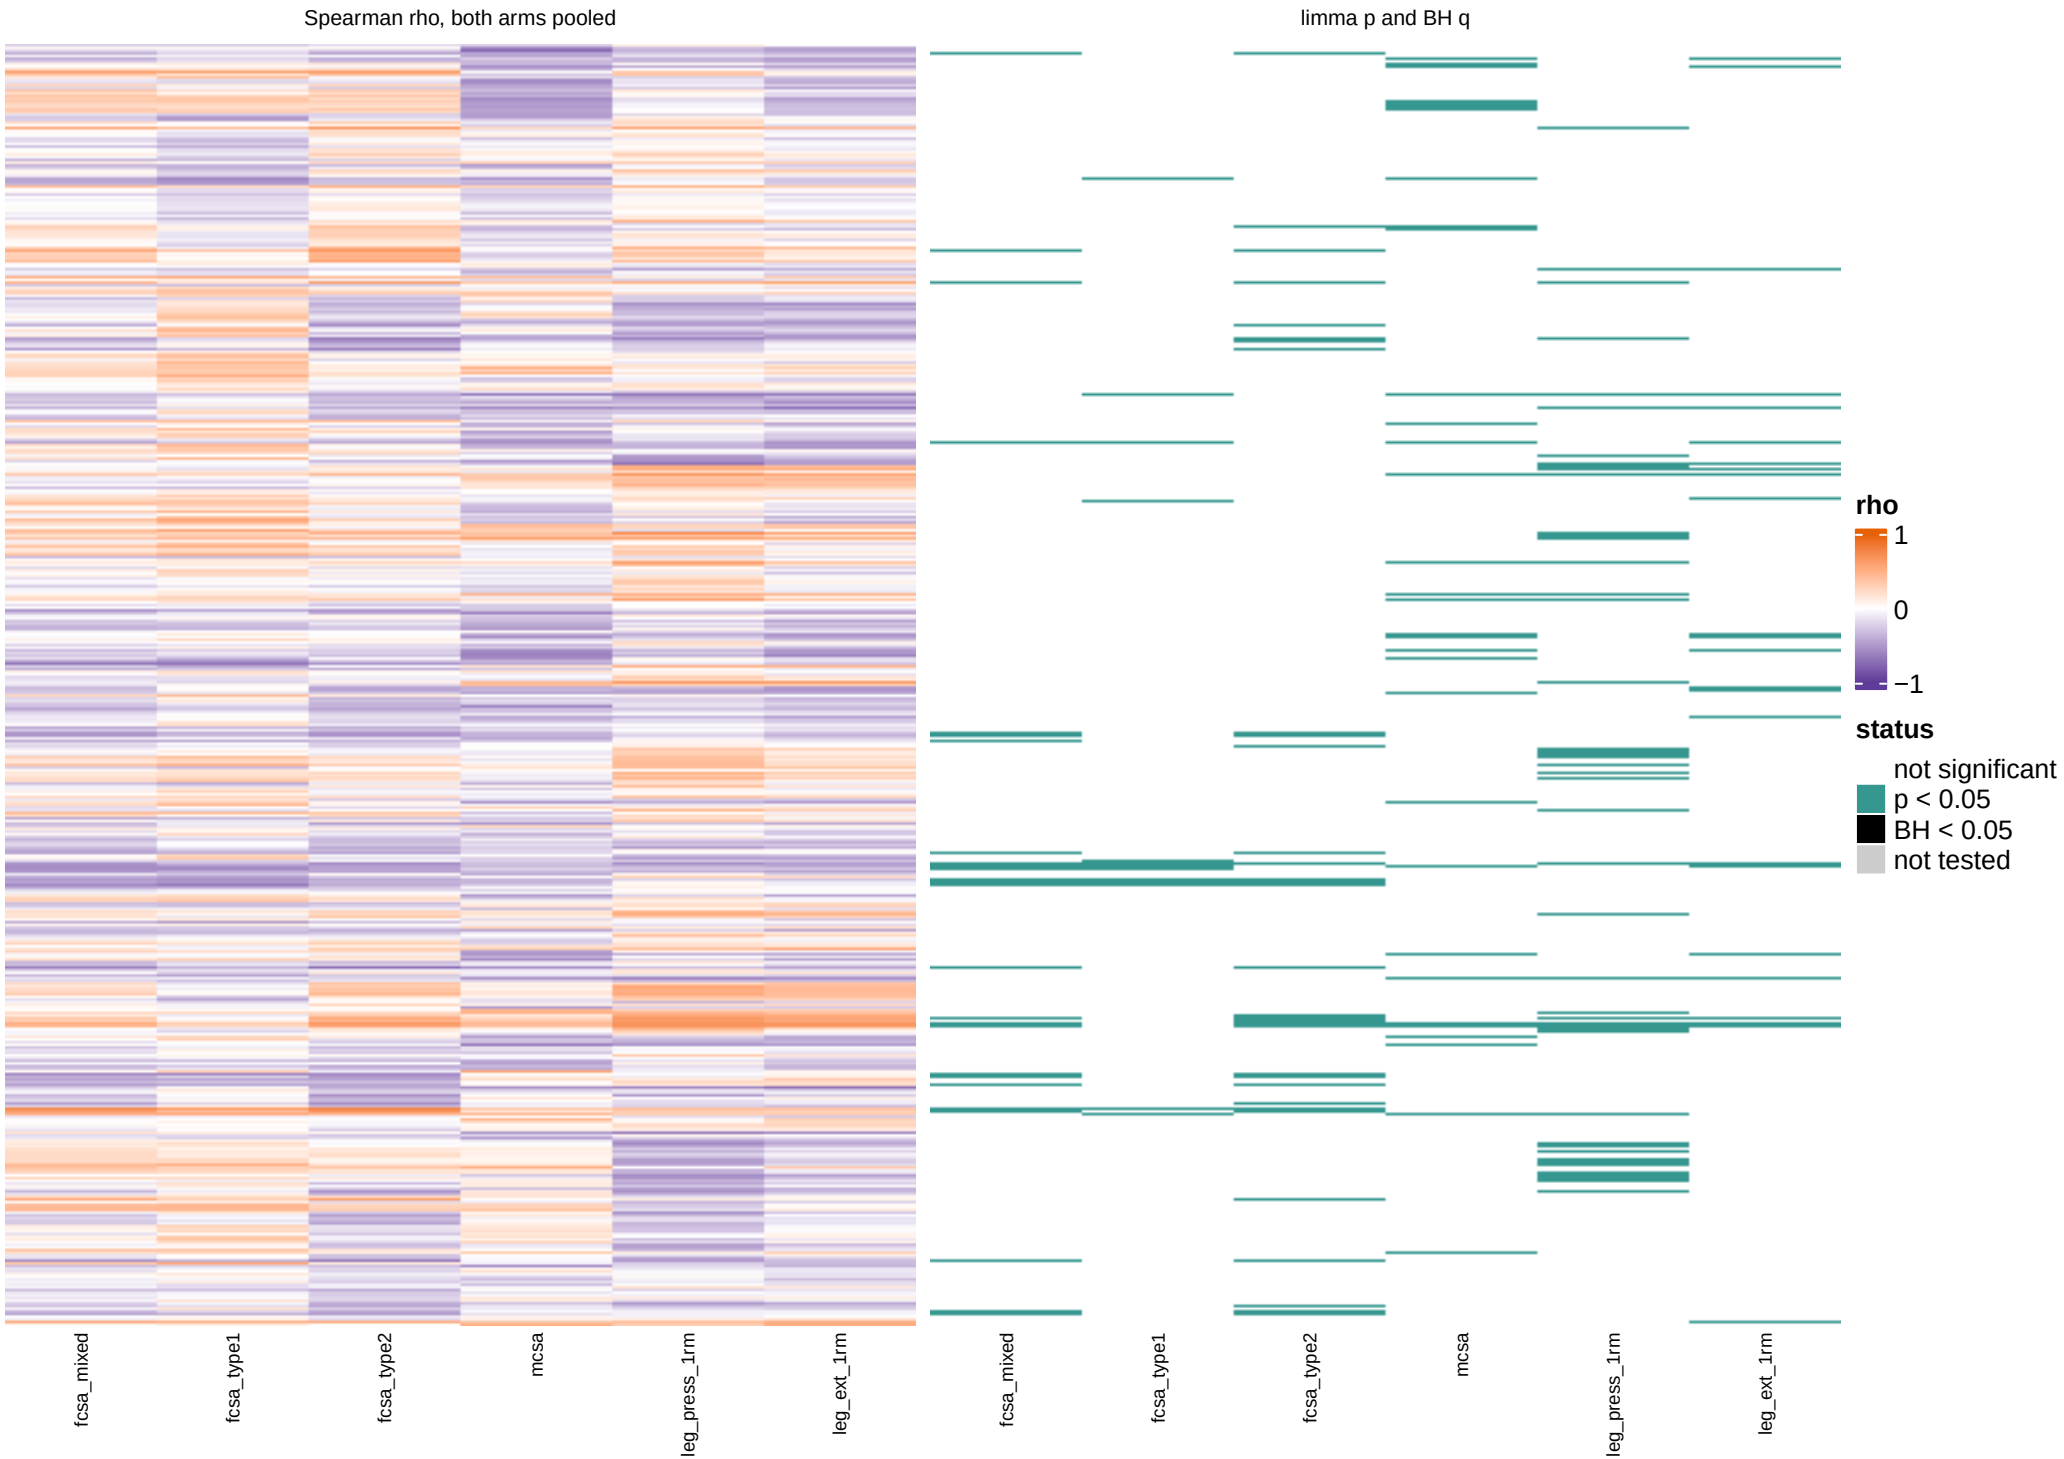


All 897 sets, one row each. Spearman rho between the singscore (T1 level) and each outcome; status from limma. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/05_associate.xlsx, change_score.

Change score overview, post_level window: GOBP

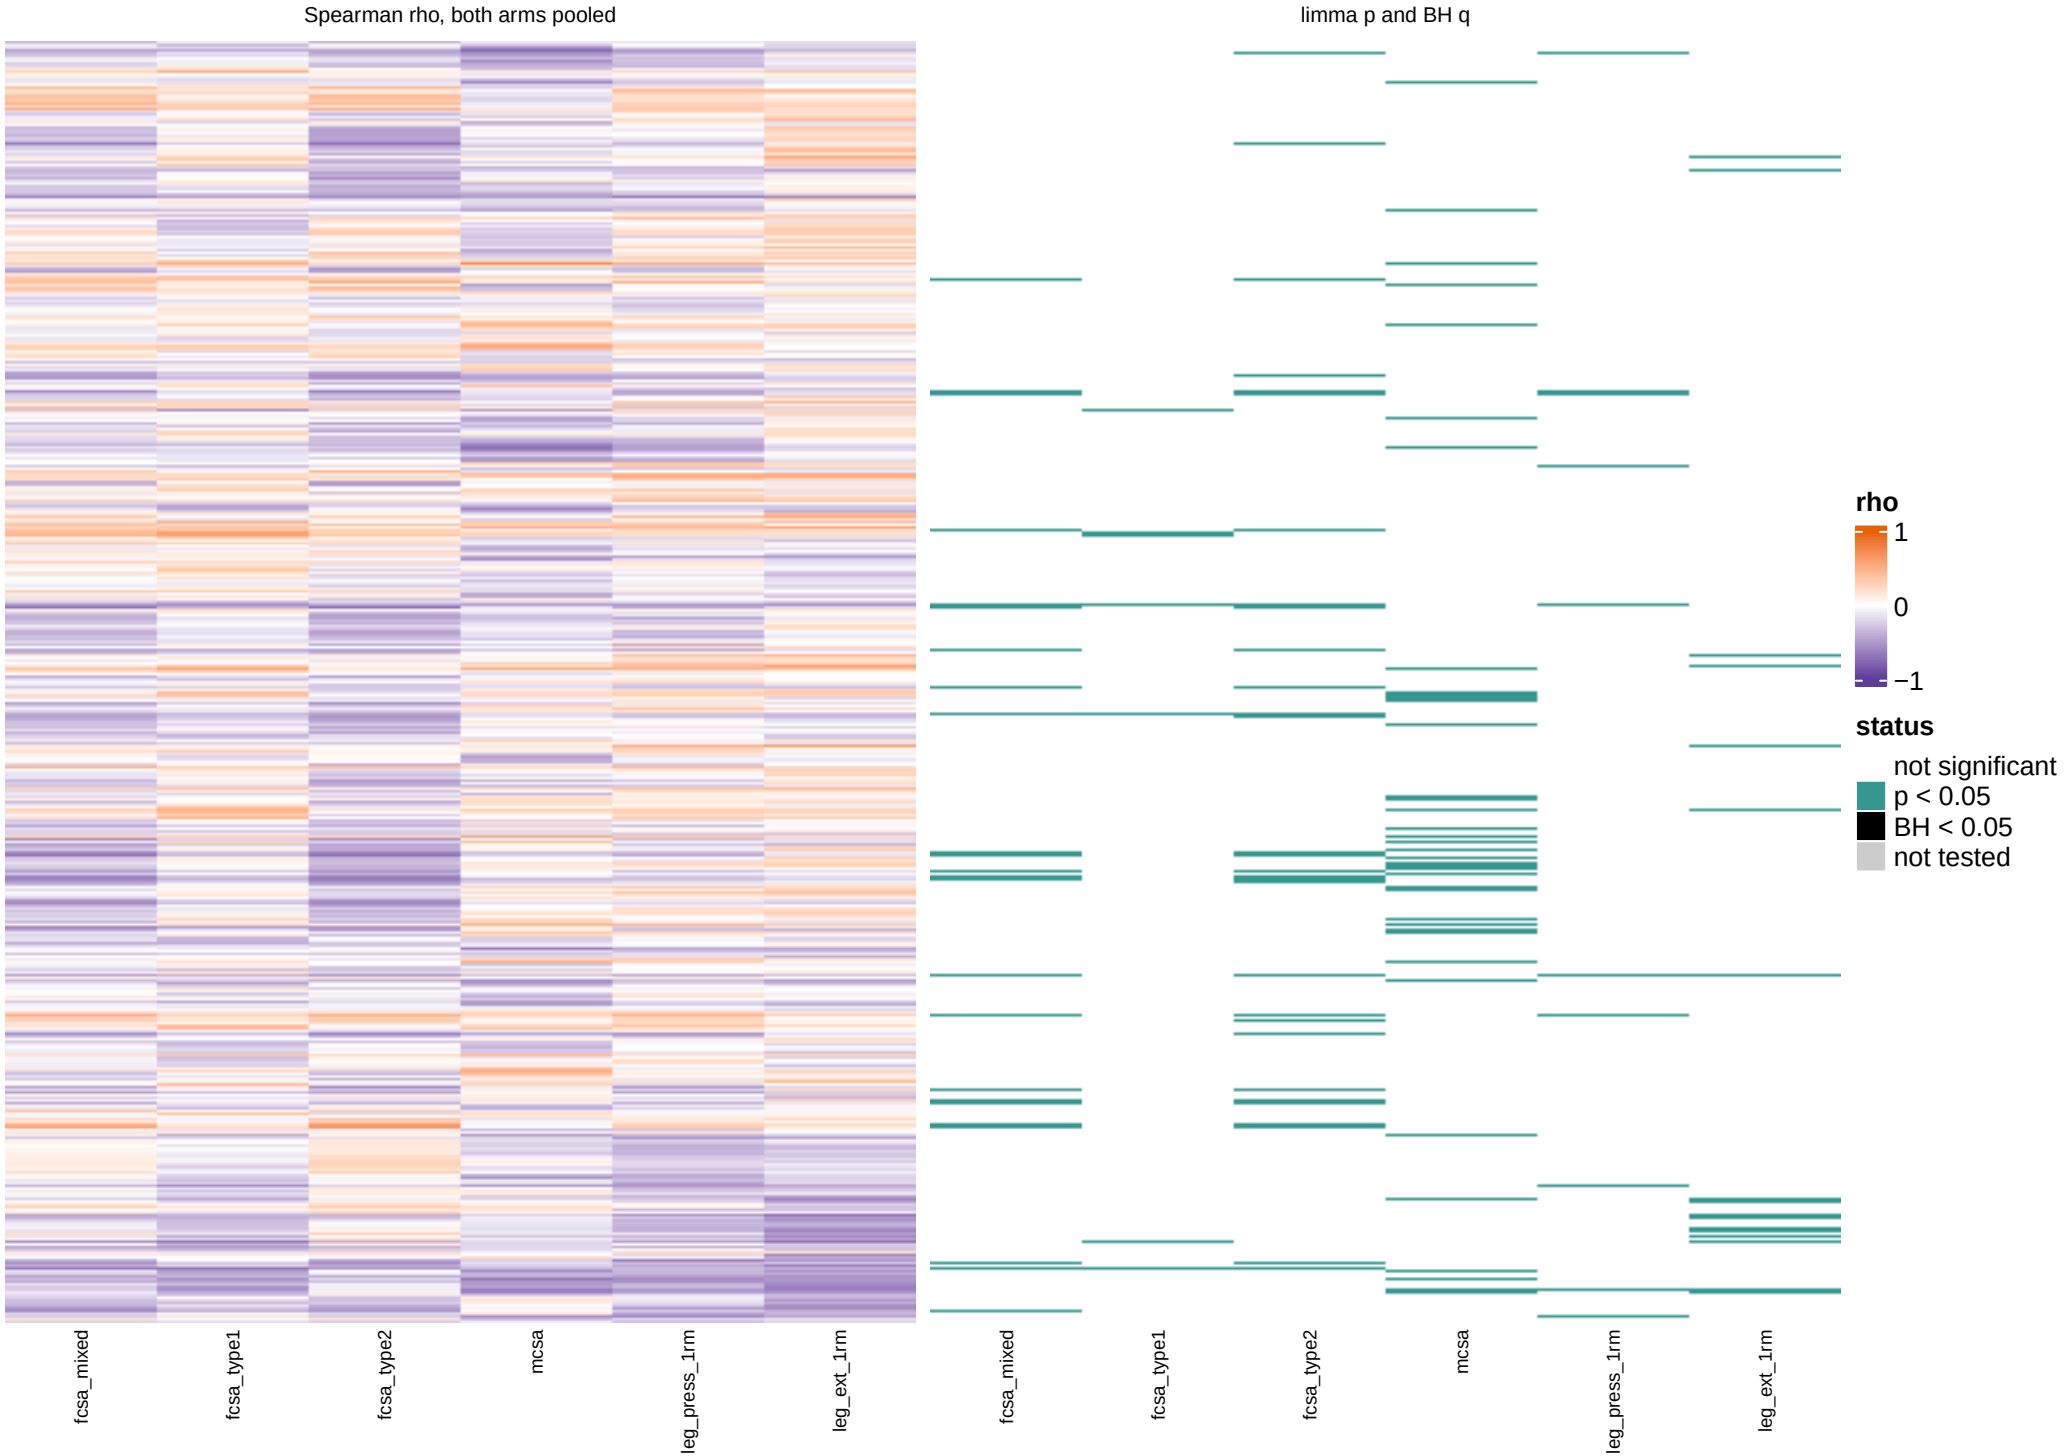

All 897 sets, one row each. Spearman rho between the singscore (T2 level) and each outcome; status from limma. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/05_associate.xlsx, change_score.

Sample model overview: GO_Slim

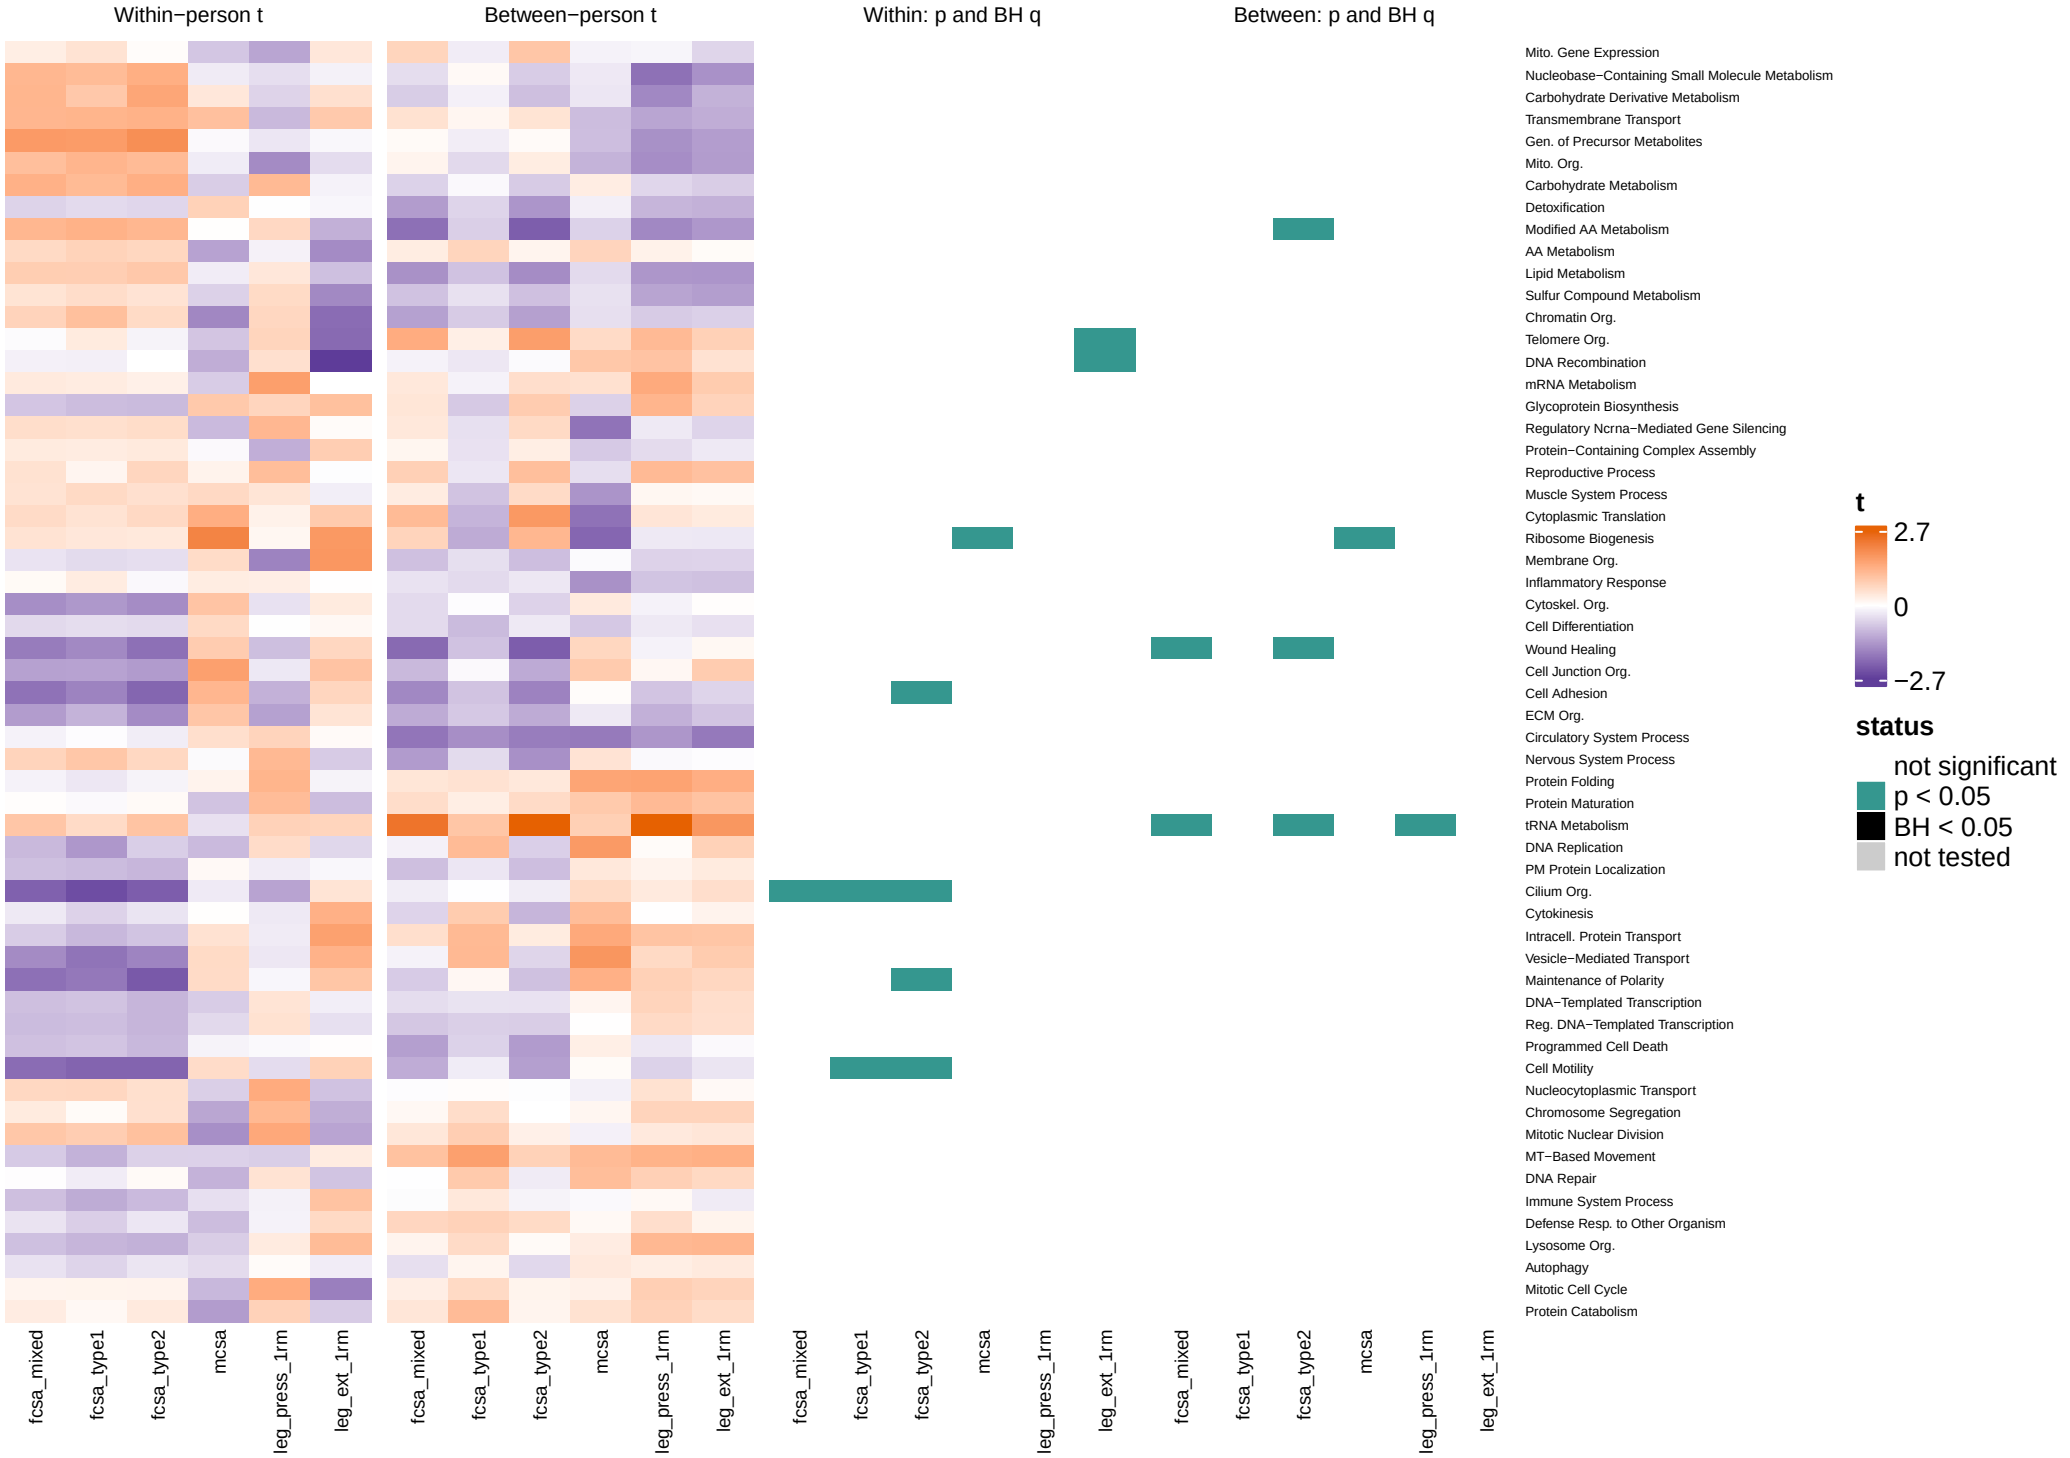


All 58 sets, one row each. Moderated t of the within and between terms, abundance ~ timepoint + between + within, subject blocked. Colours stop at the 99th percentile of |t|, 2.7. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/05_associate.xlsx, model.

Change score overview, training window: GO_Slim




All 58 sets, one row each. Spearman rho between the singscore (change, T1 to T2) and each outcome; status from limma. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/05_associate.xlsx, change_score.

Change score overview, baseline window: GO_Slim

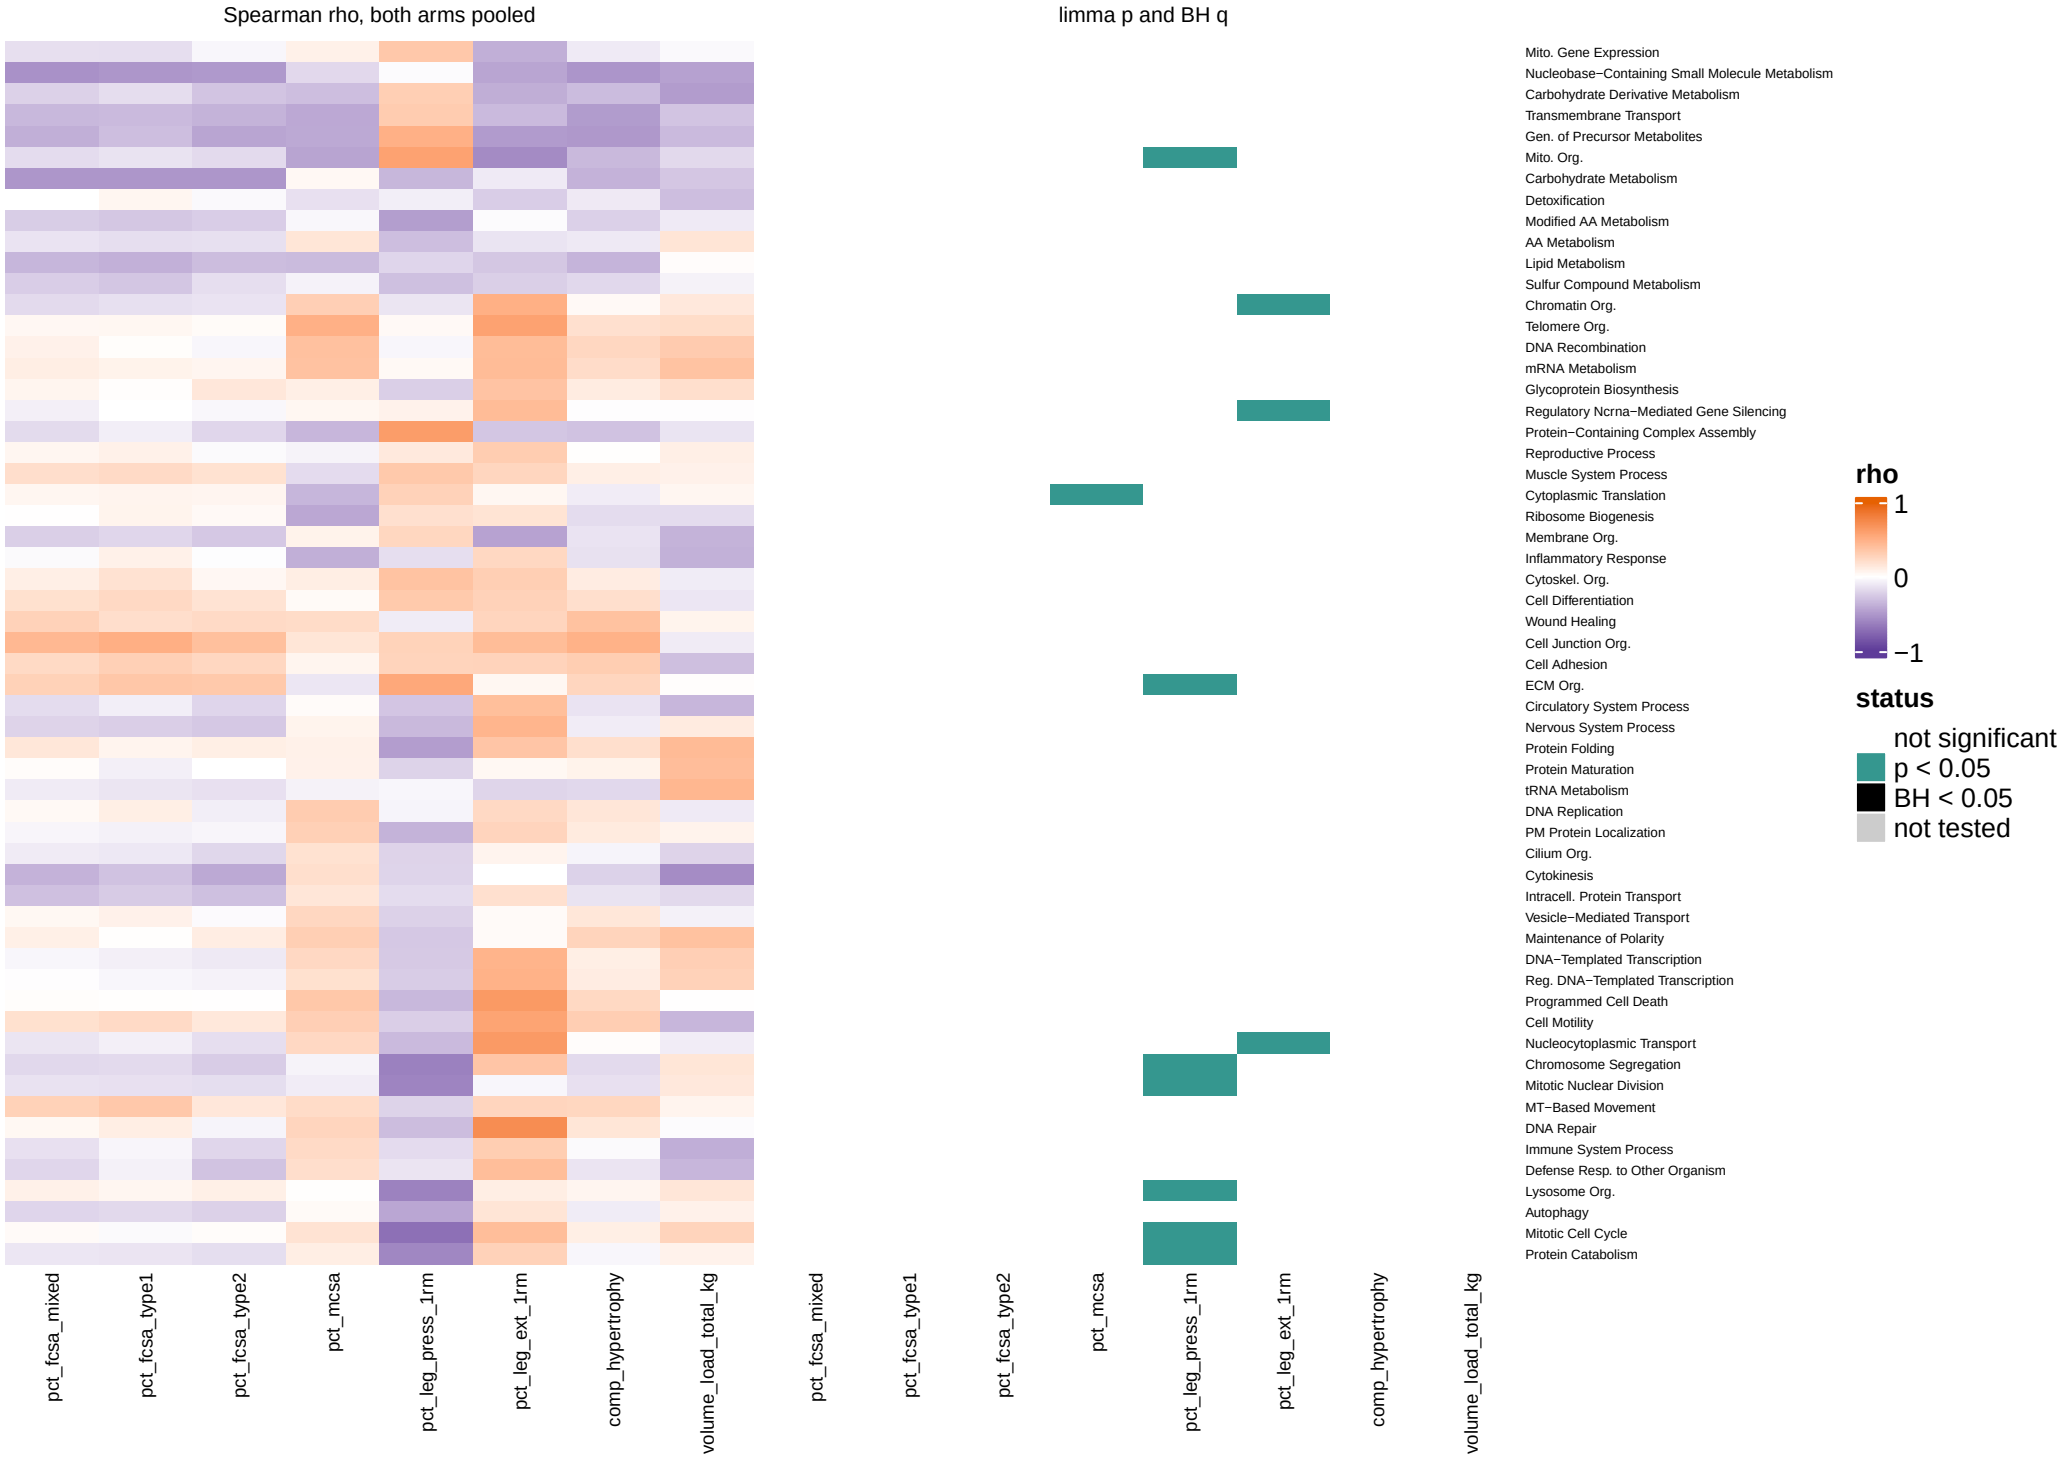


All 58 sets, one row each. Spearman rho between the singscore (T1 level) and each outcome; status from limma. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/05_associate.xlsx, change_score.

Change score overview, acute window: GO_Slim

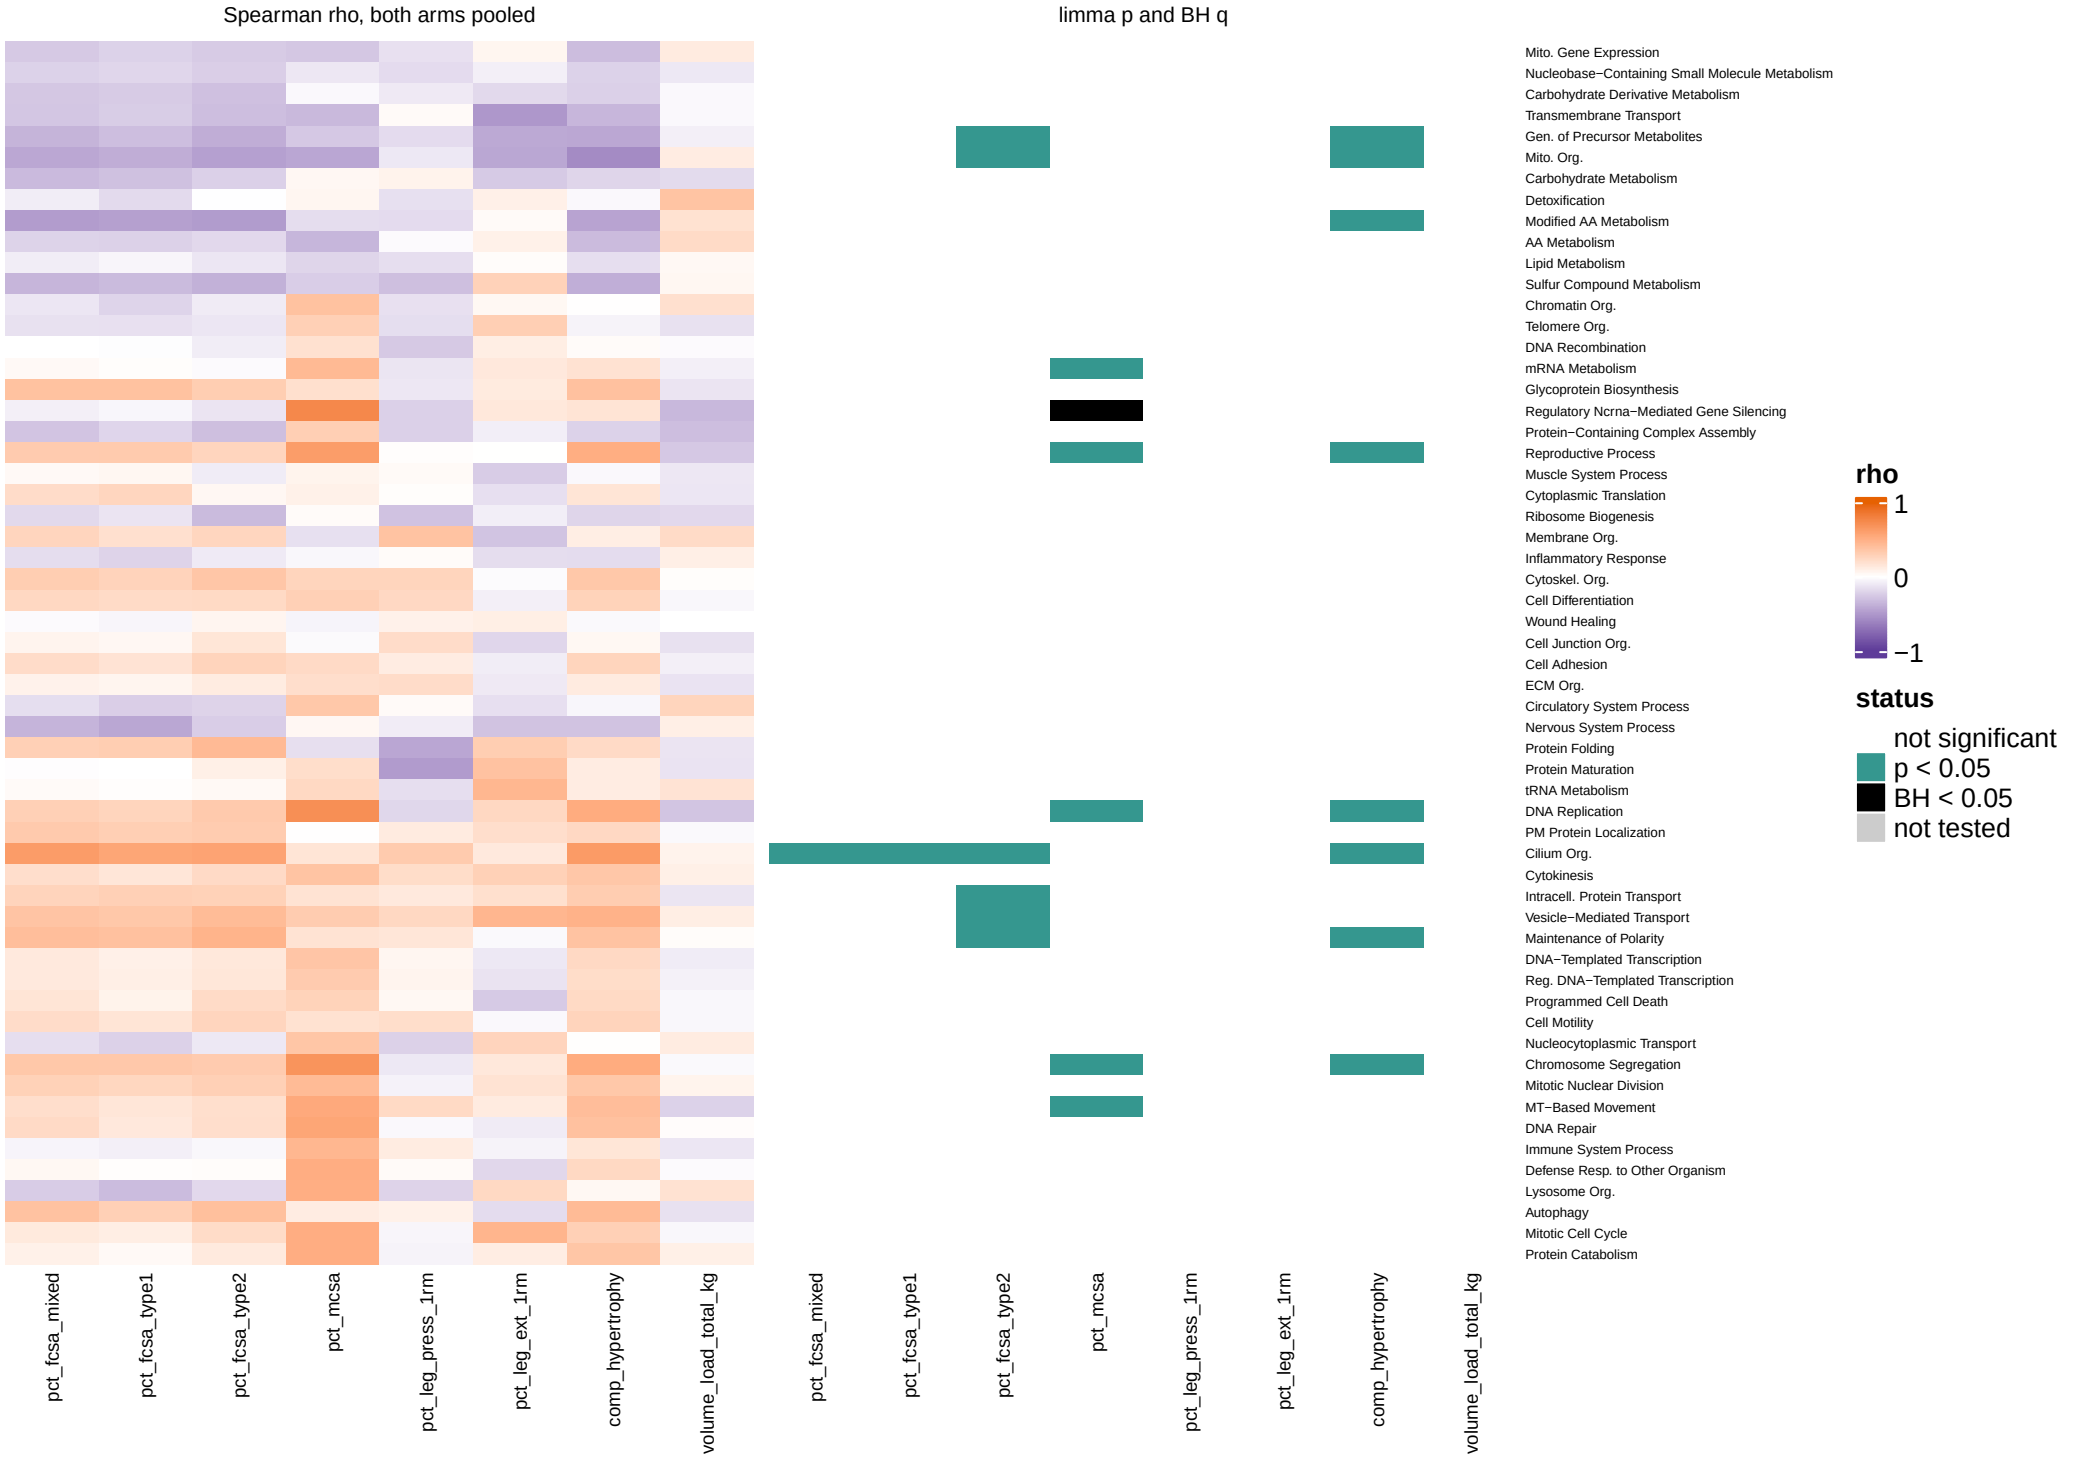

All 58 sets, one row each. Spearman rho between the singscore (change, T2 to T3) and each outcome; status from limma. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/05_associate.xlsx, change_score.

Change score overview, baseline_level window: GO_Slim

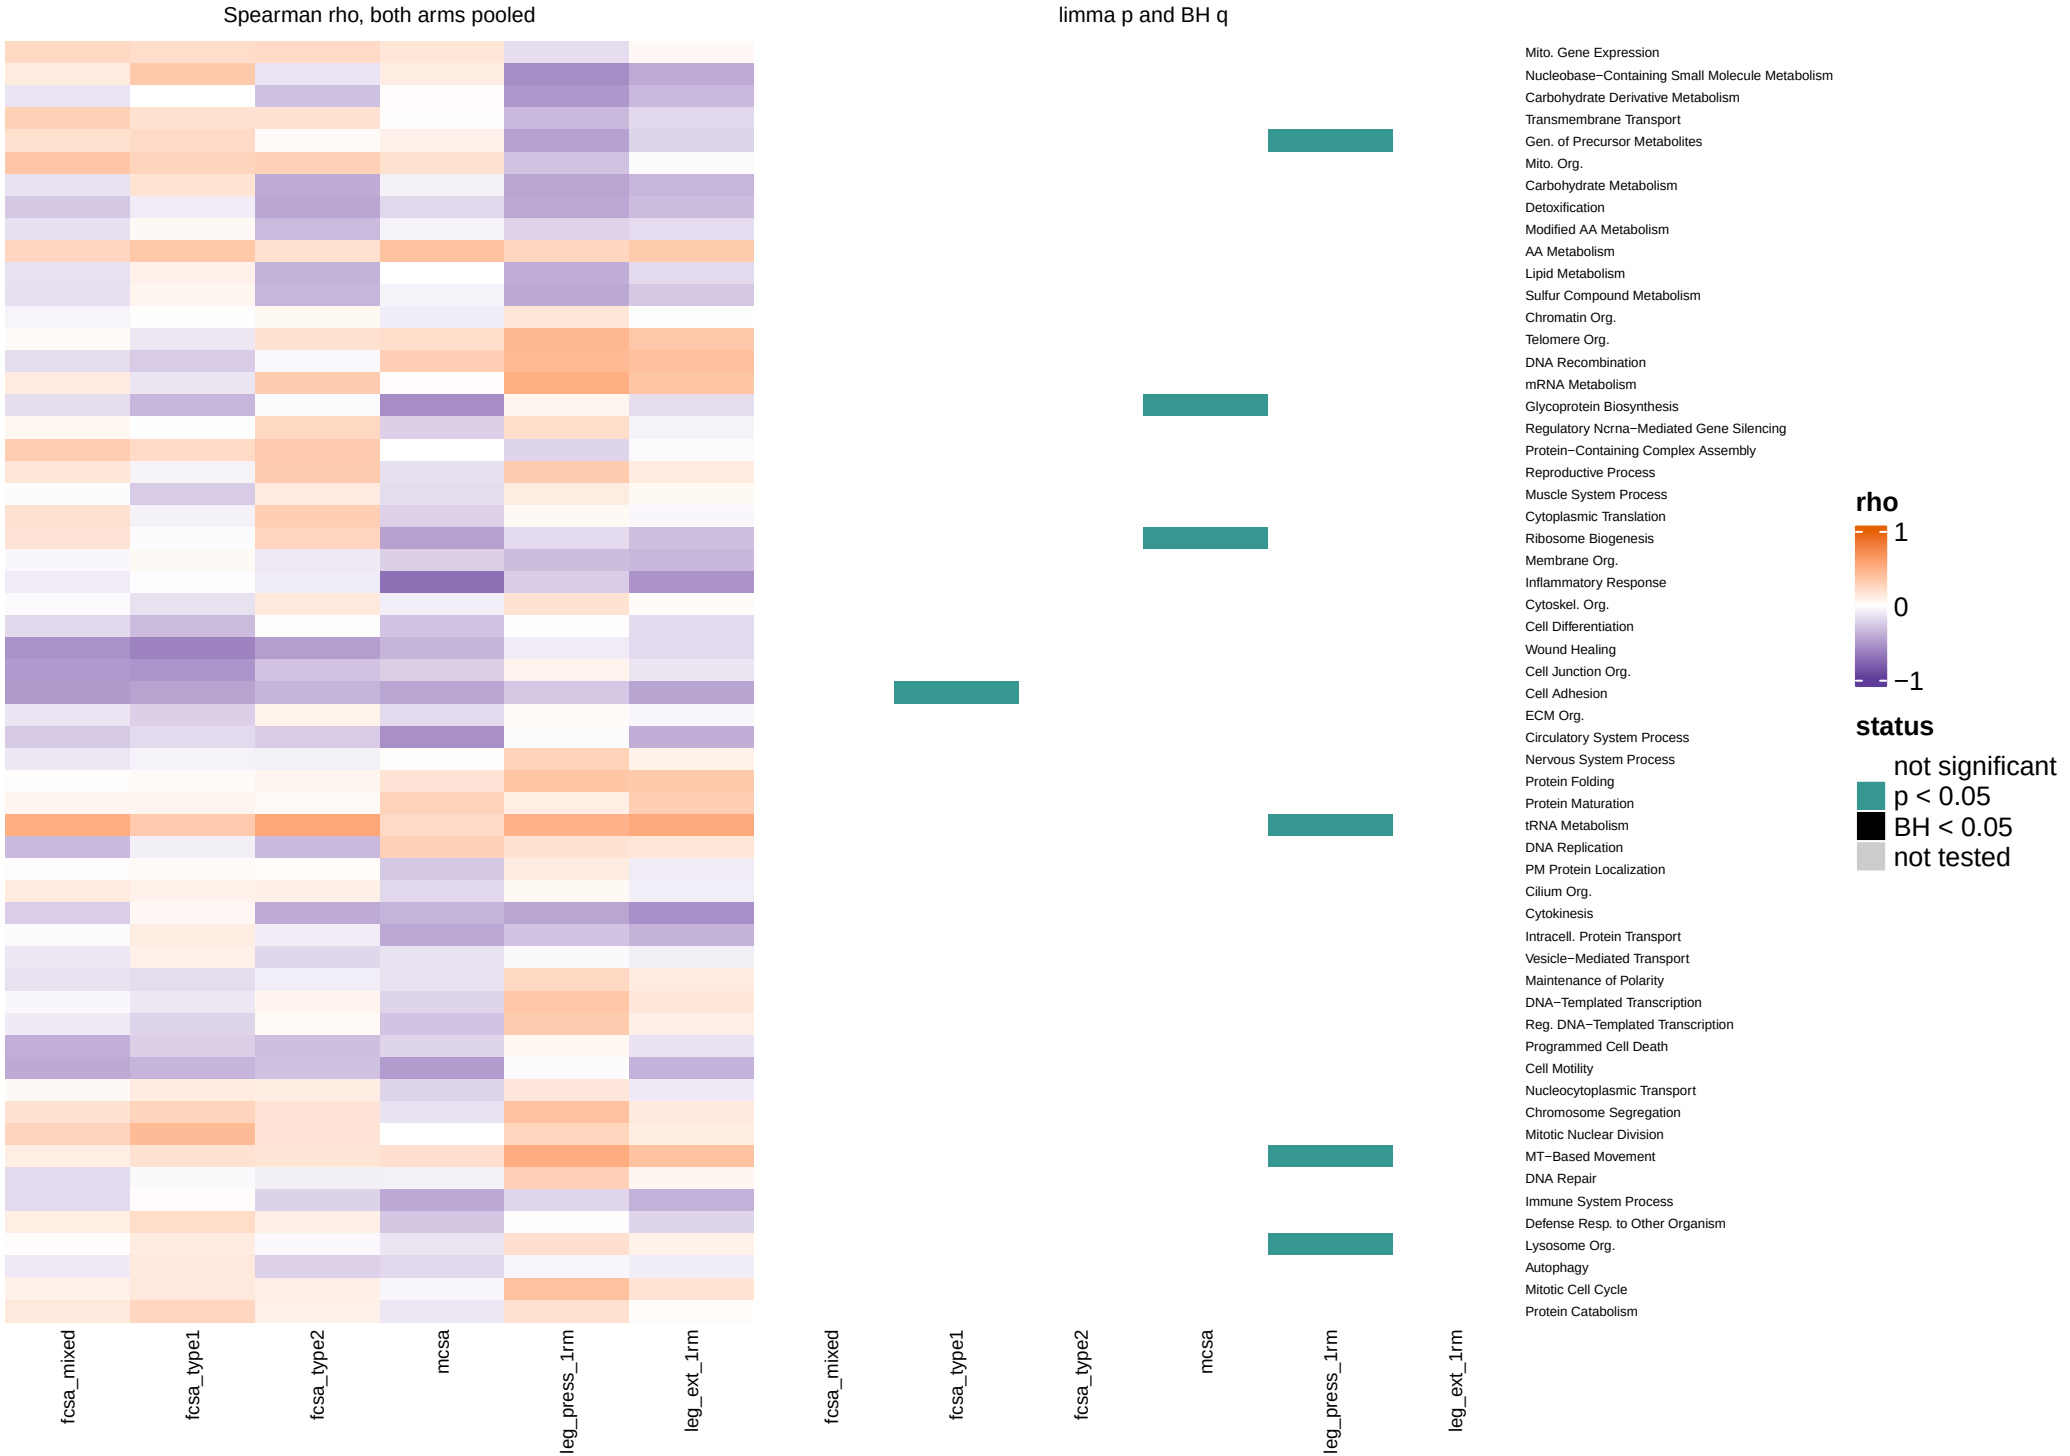

All 58 sets, one row each. Spearman rho between the singscore (T1 level) and each outcome; status from limma. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/05_associate.xlsx, change_score.


Change score overview, post_level window: GO_Slim



All 58 sets, one row each. Spearman rho between the singscore (T2 level) and each outcome; status from limma. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/05_associate.xlsx, change_score.

fcsa_mixed, within−person term


56 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 1 of 5.

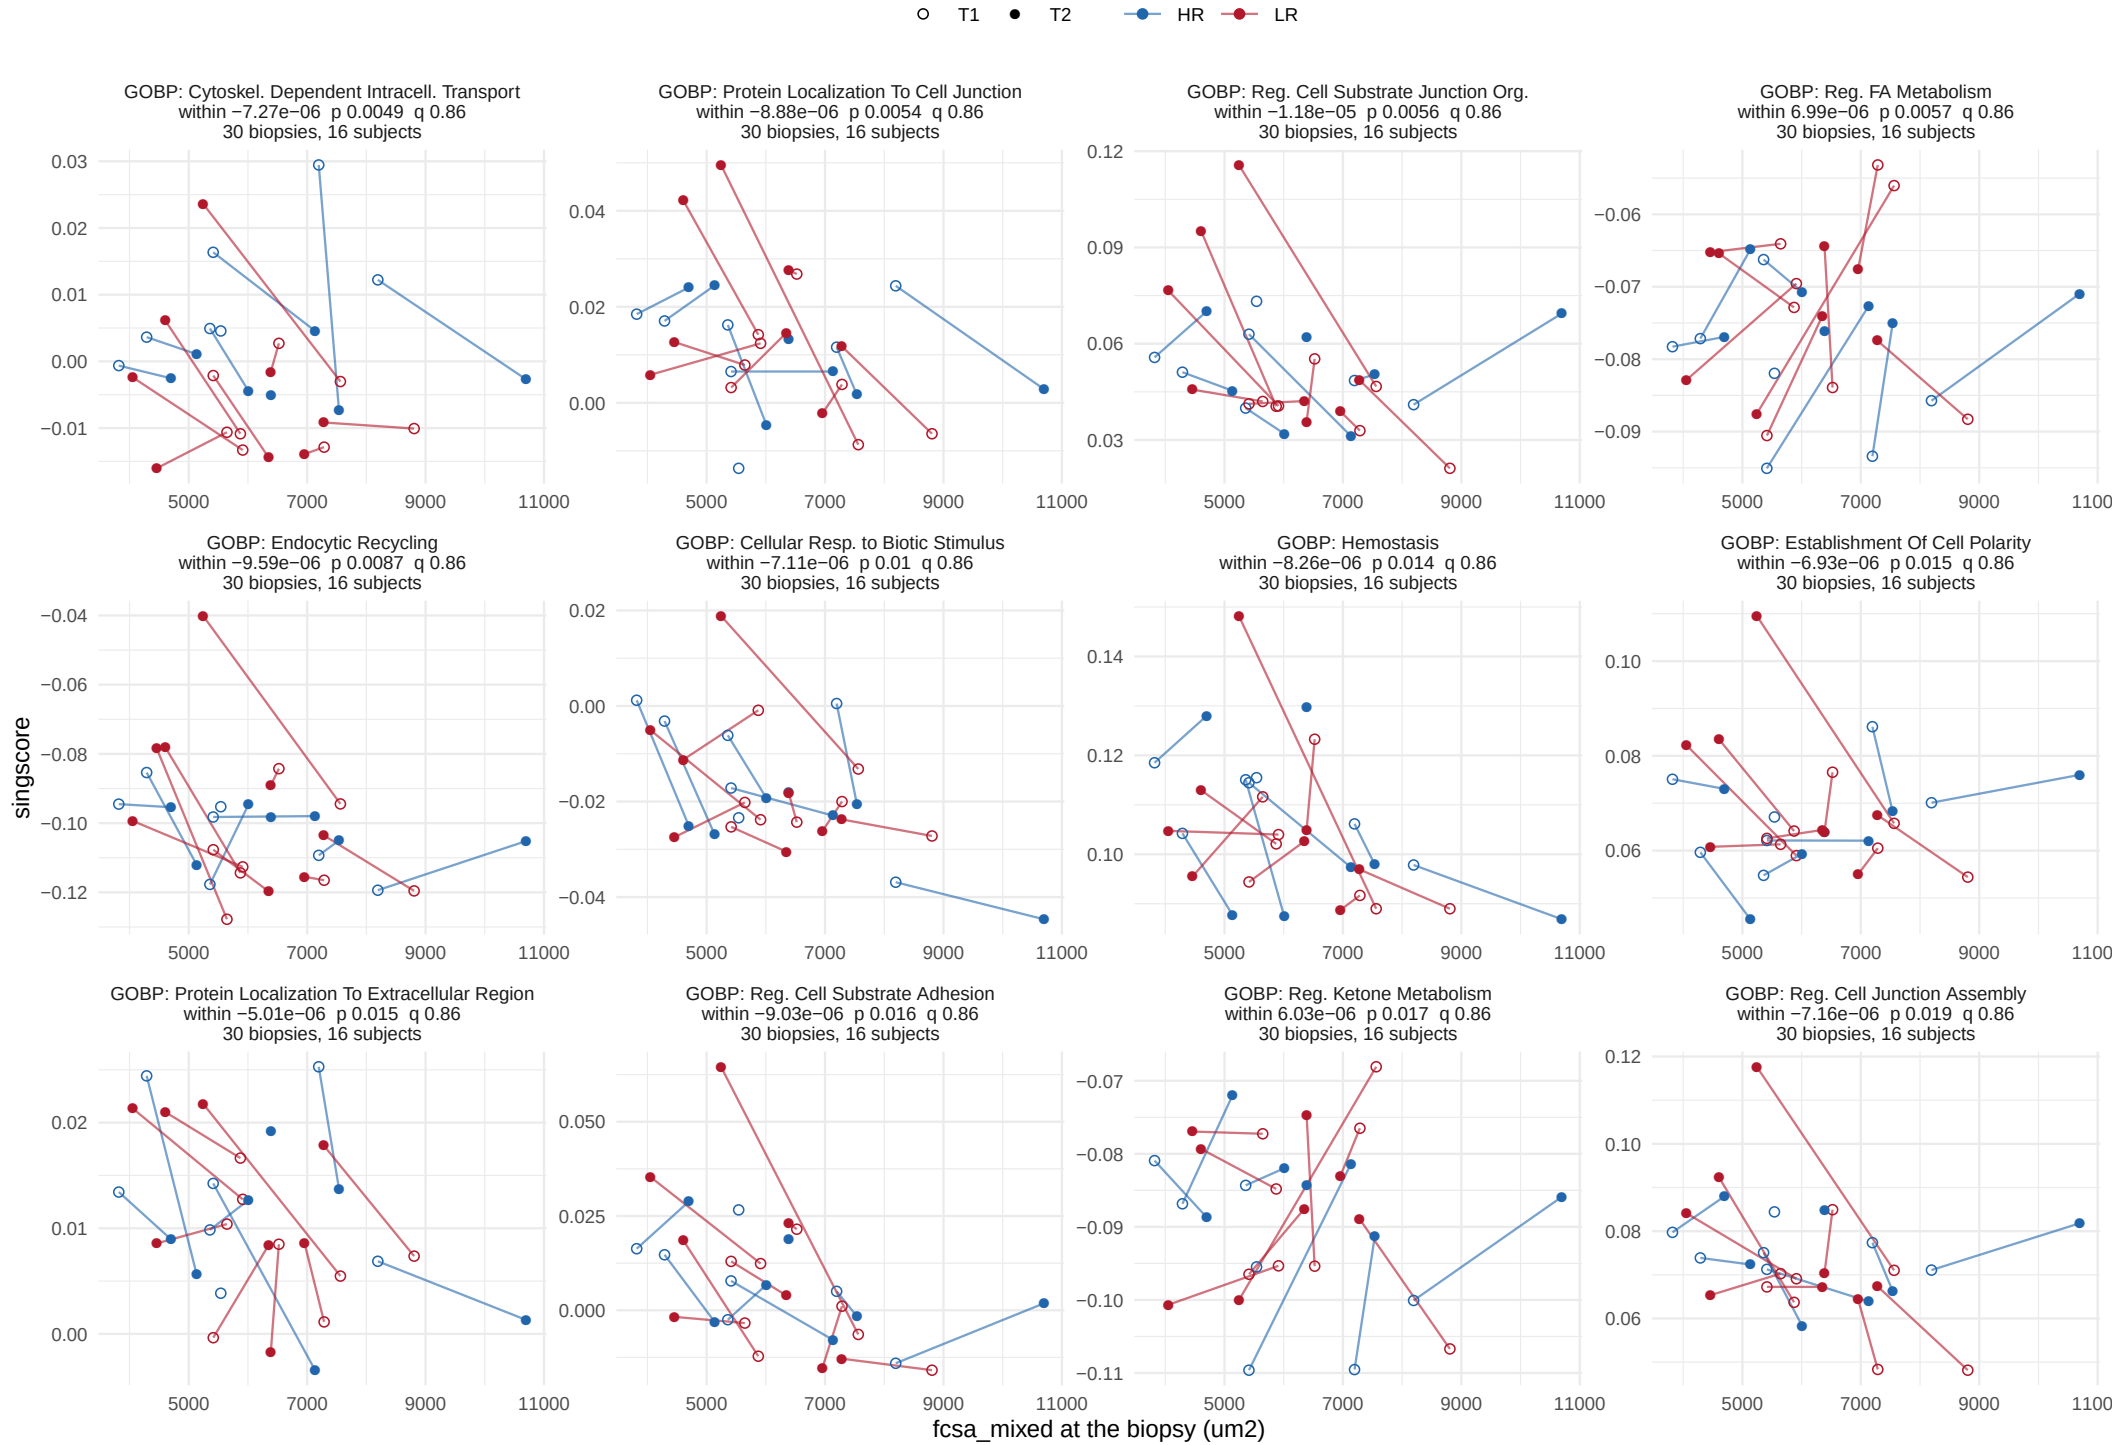

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/05_associate.xlsx, model.

fcsa_mixed, within−person term


56 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 2 of 5.

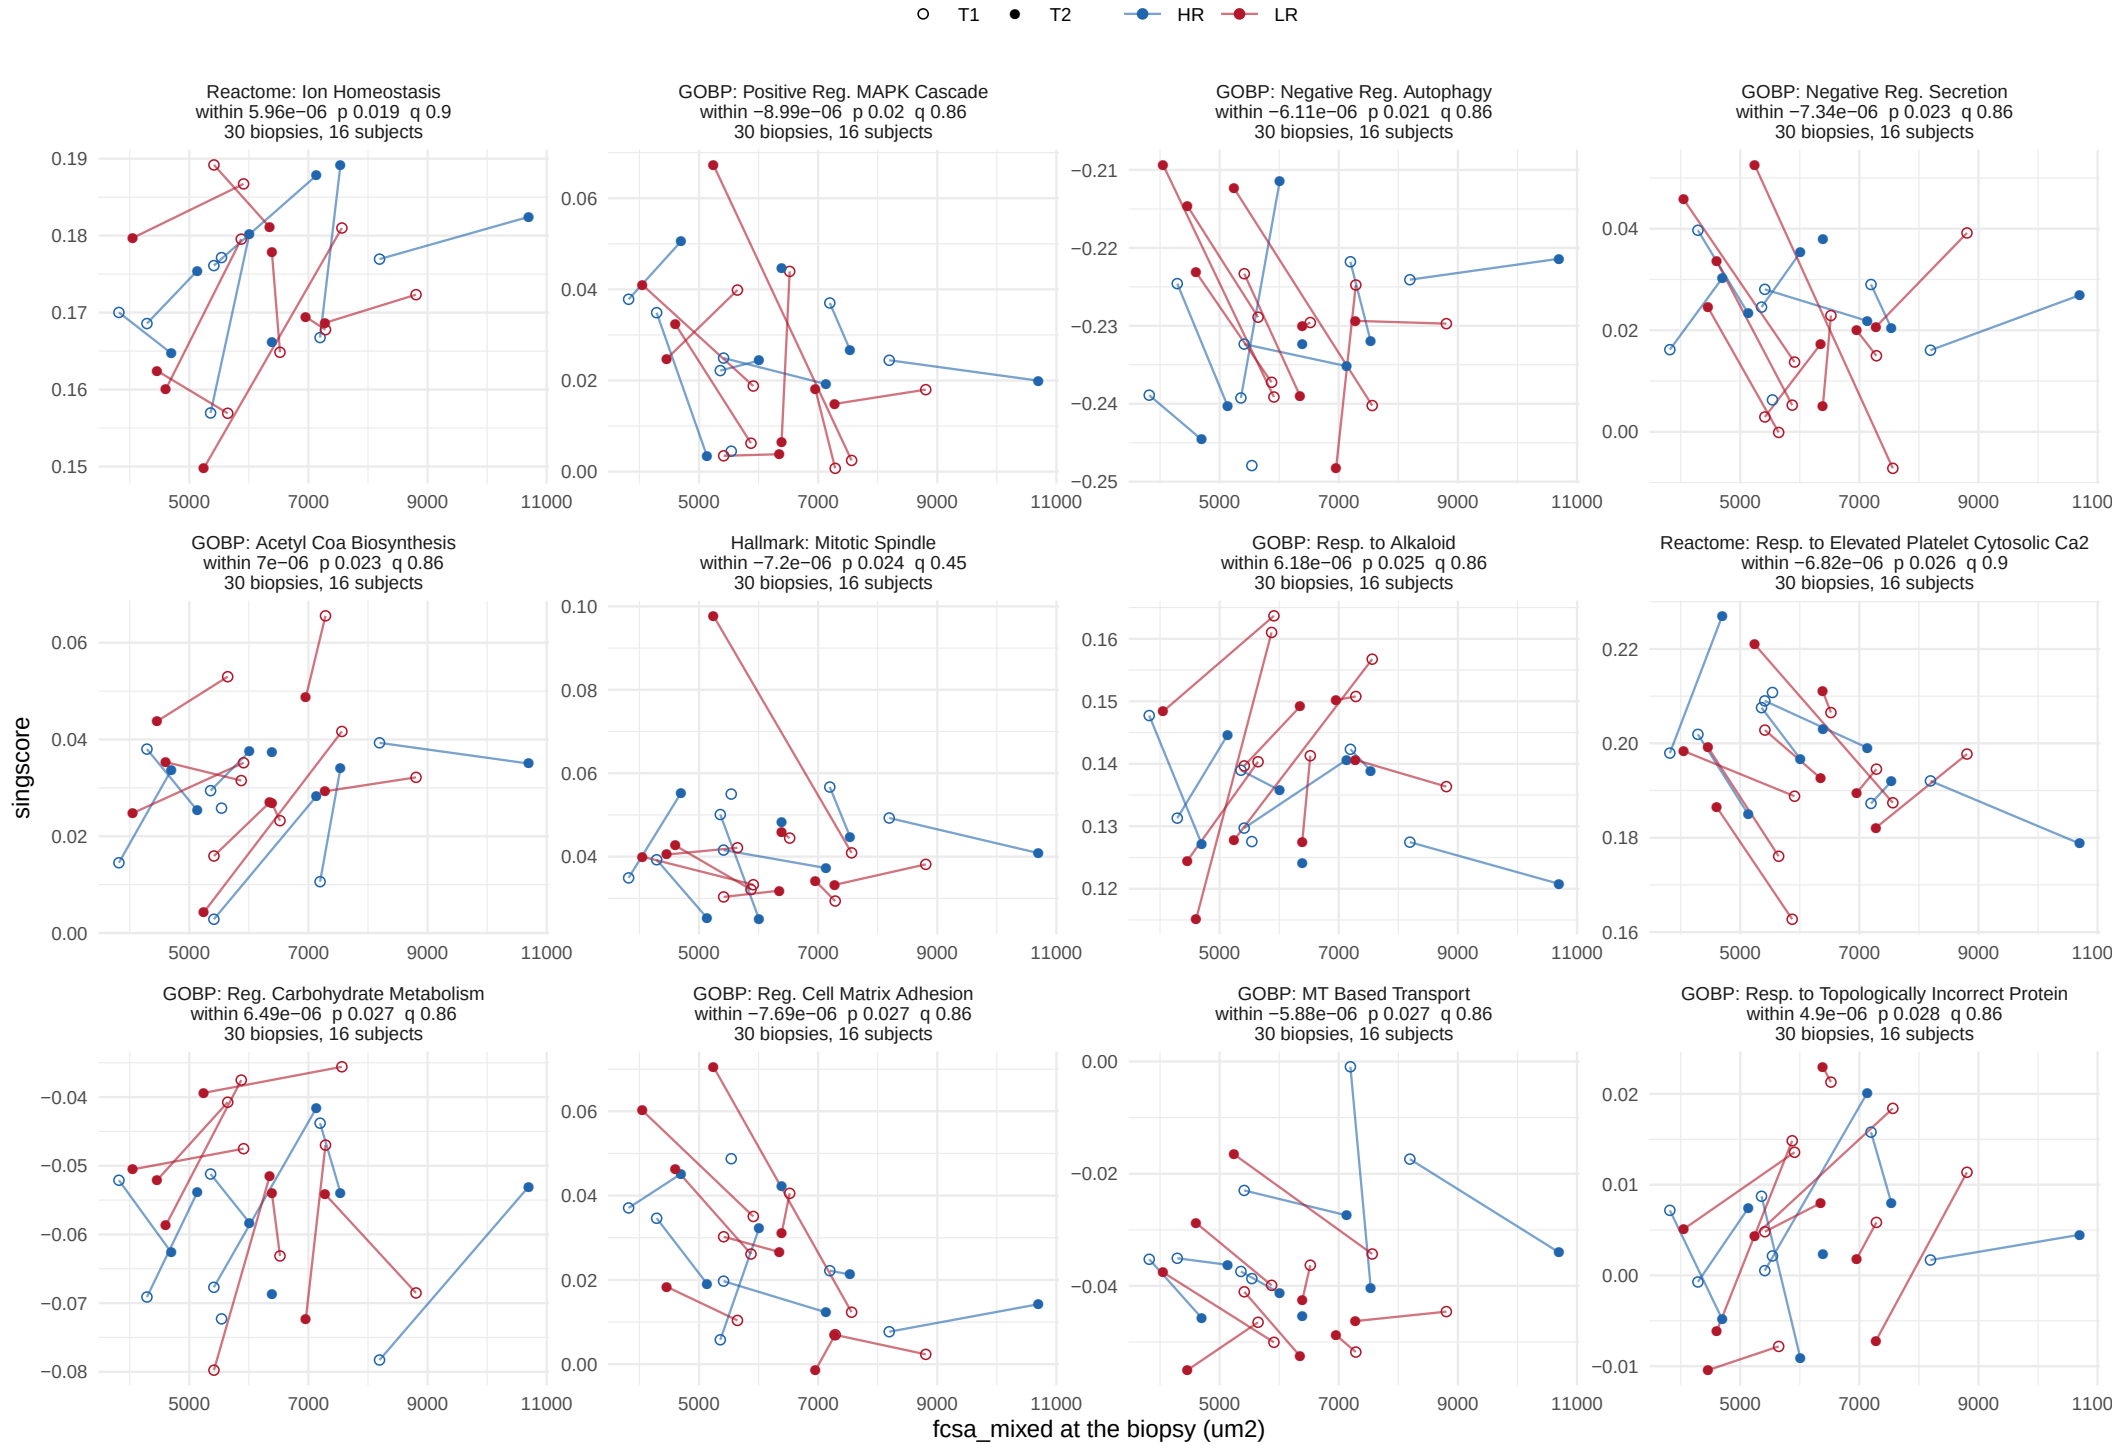

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/05_associate.xlsx, model.

fcsa_mixed, within−person term


56 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 3 of 5.

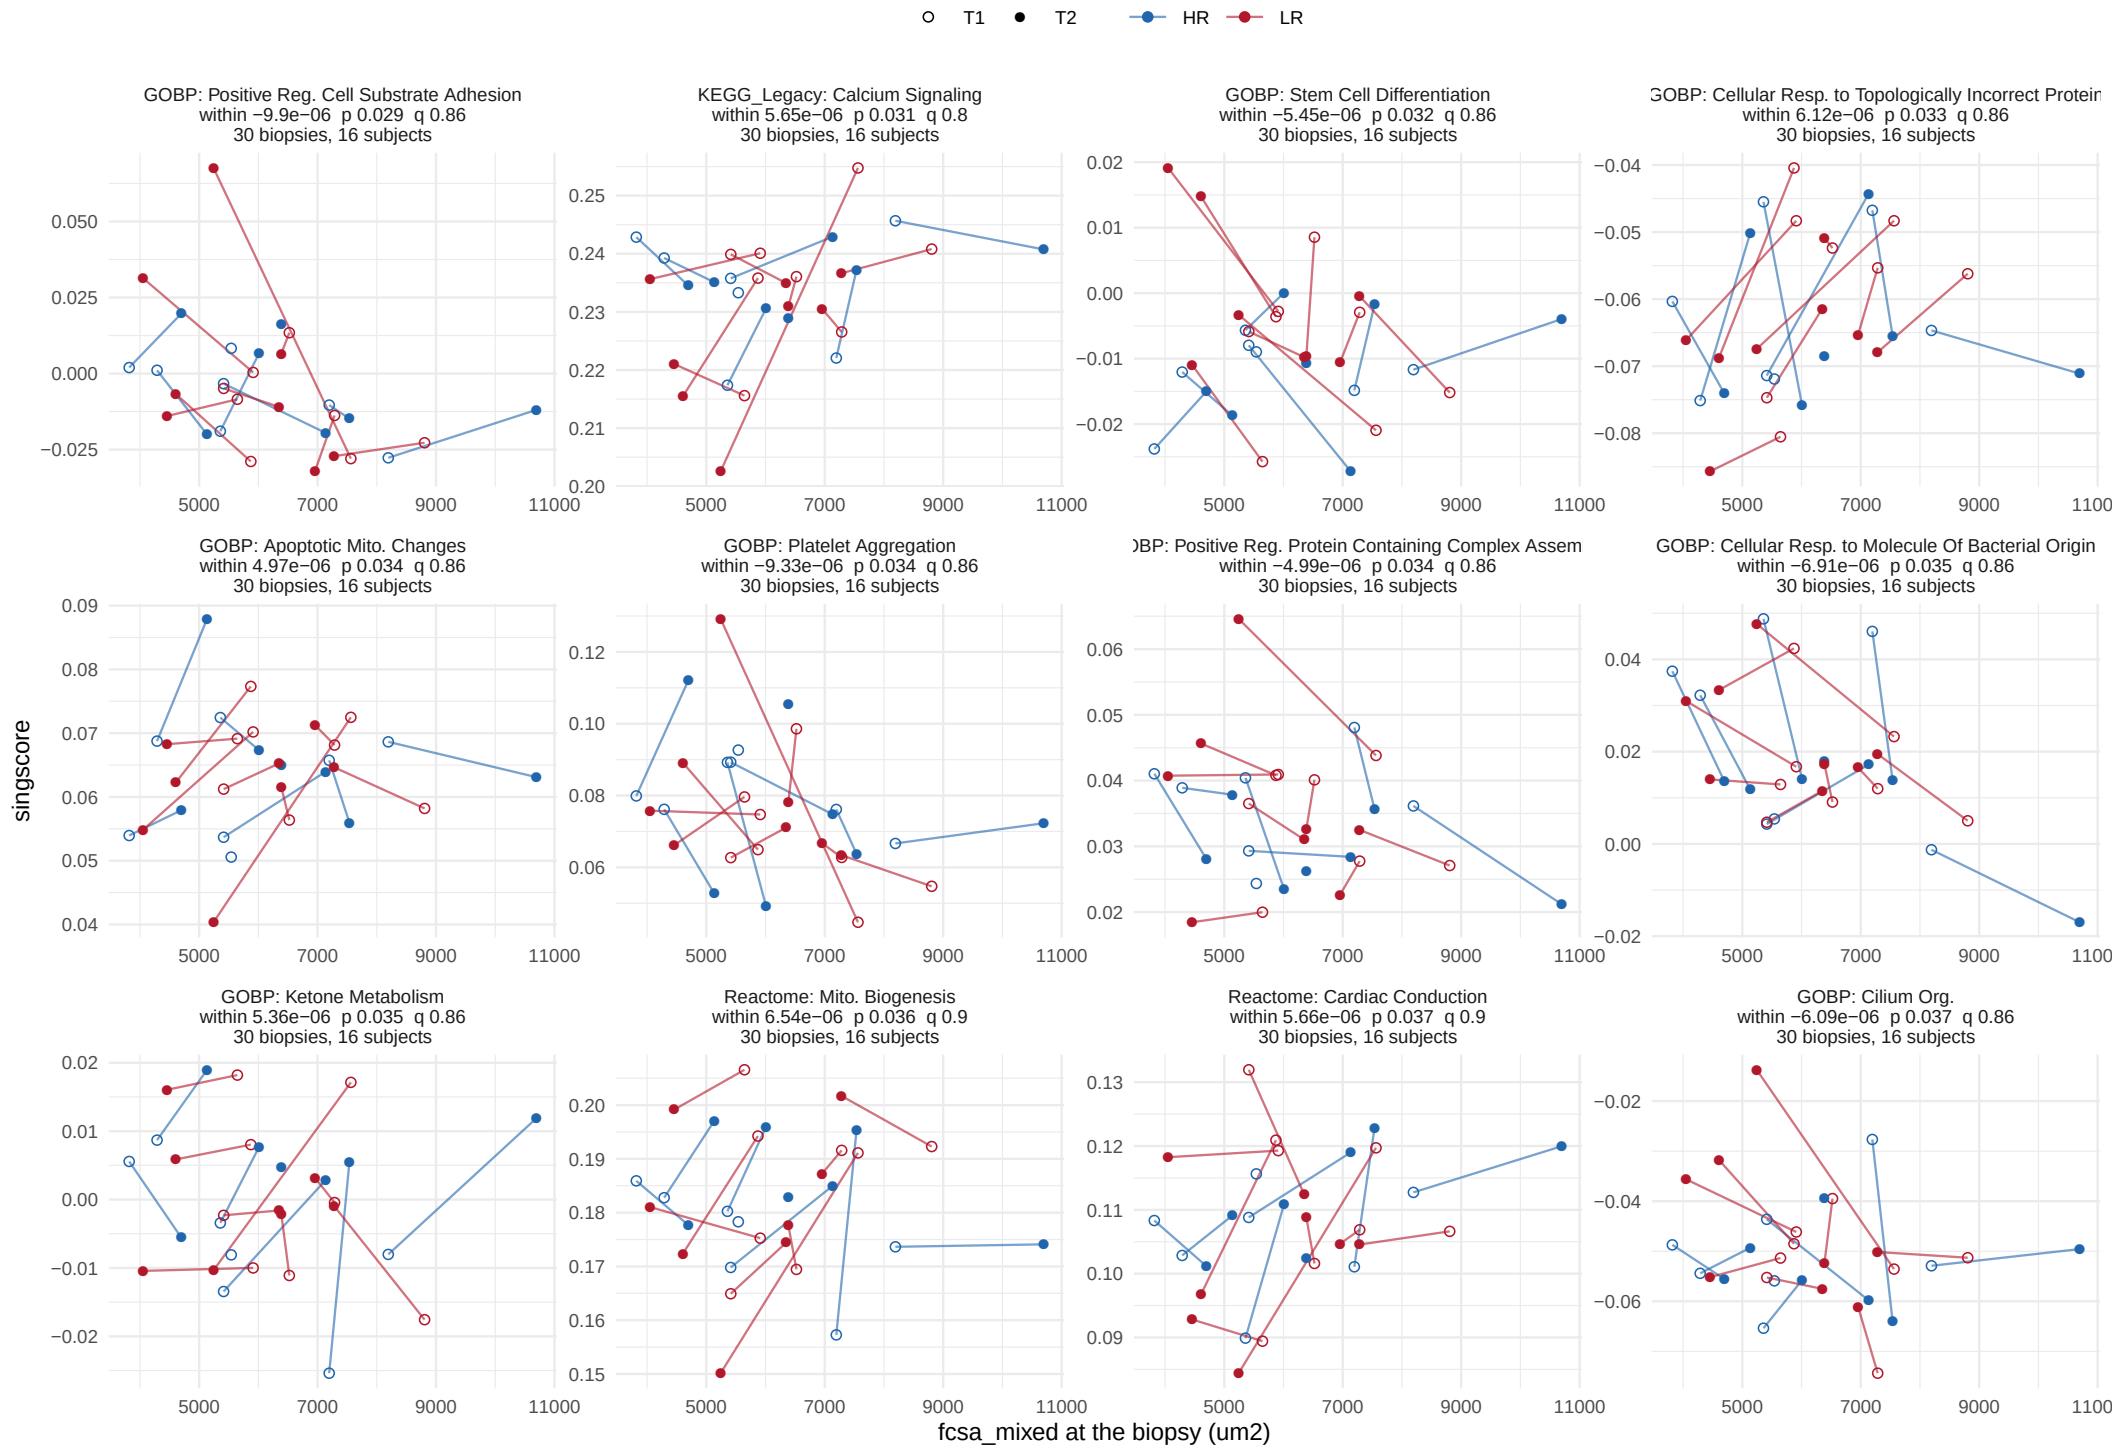

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/05_associate.xlsx, model.

fcsa_mixed, within−person term


56 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 4 of 5.

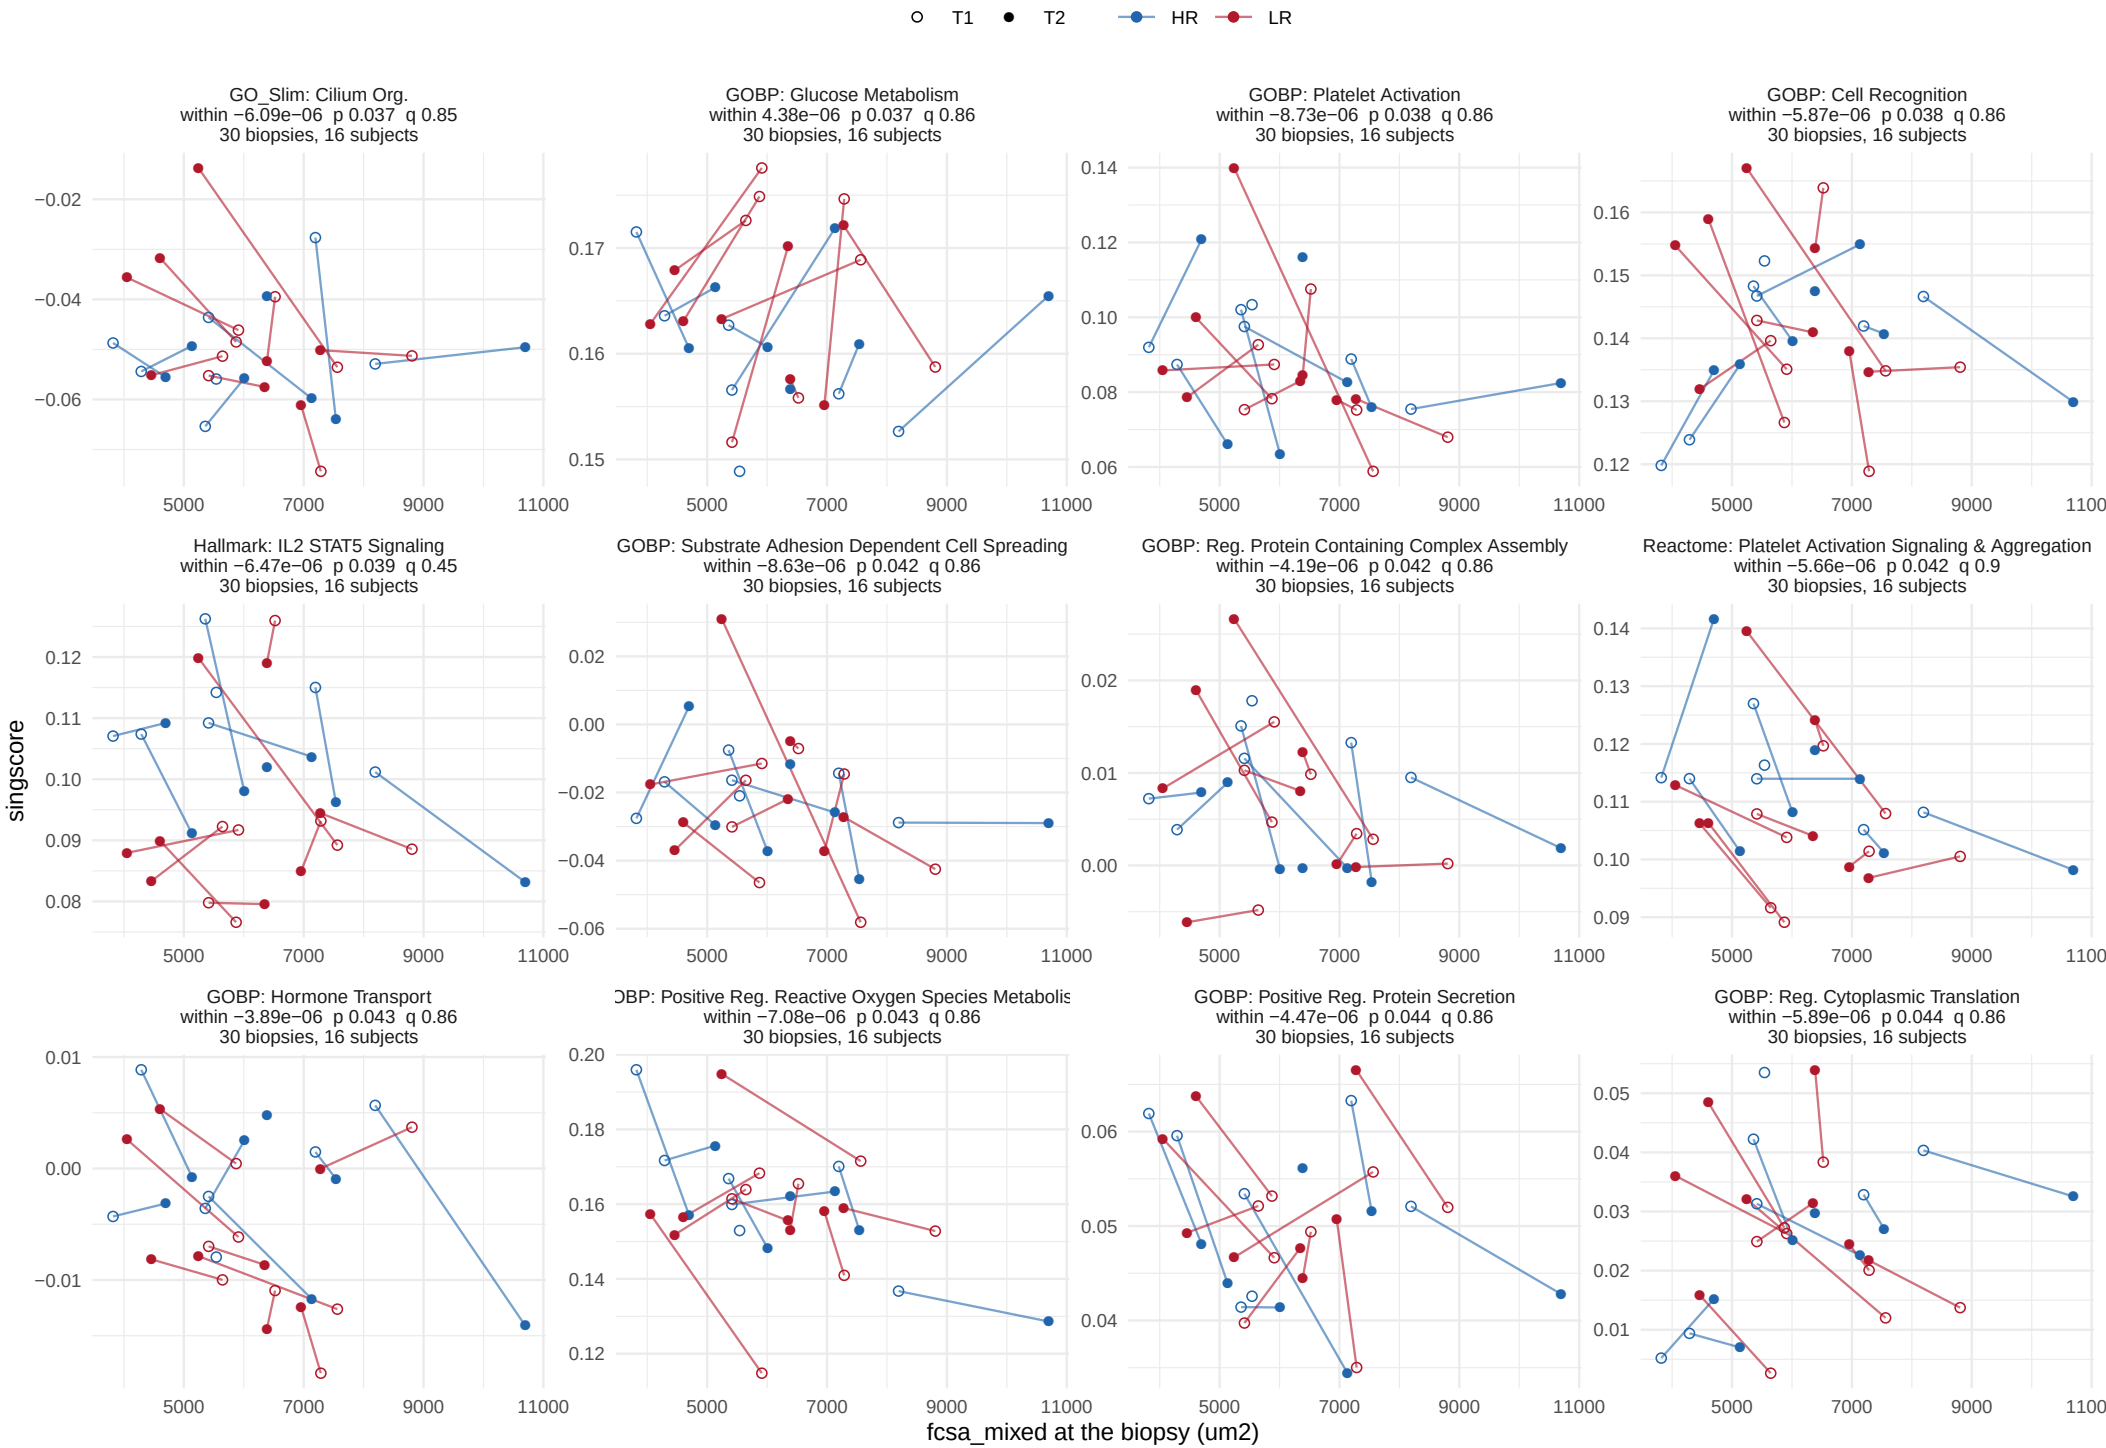

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/05_associate.xlsx, model.

fcsa_mixed, within−person term


56 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 5 of 5.

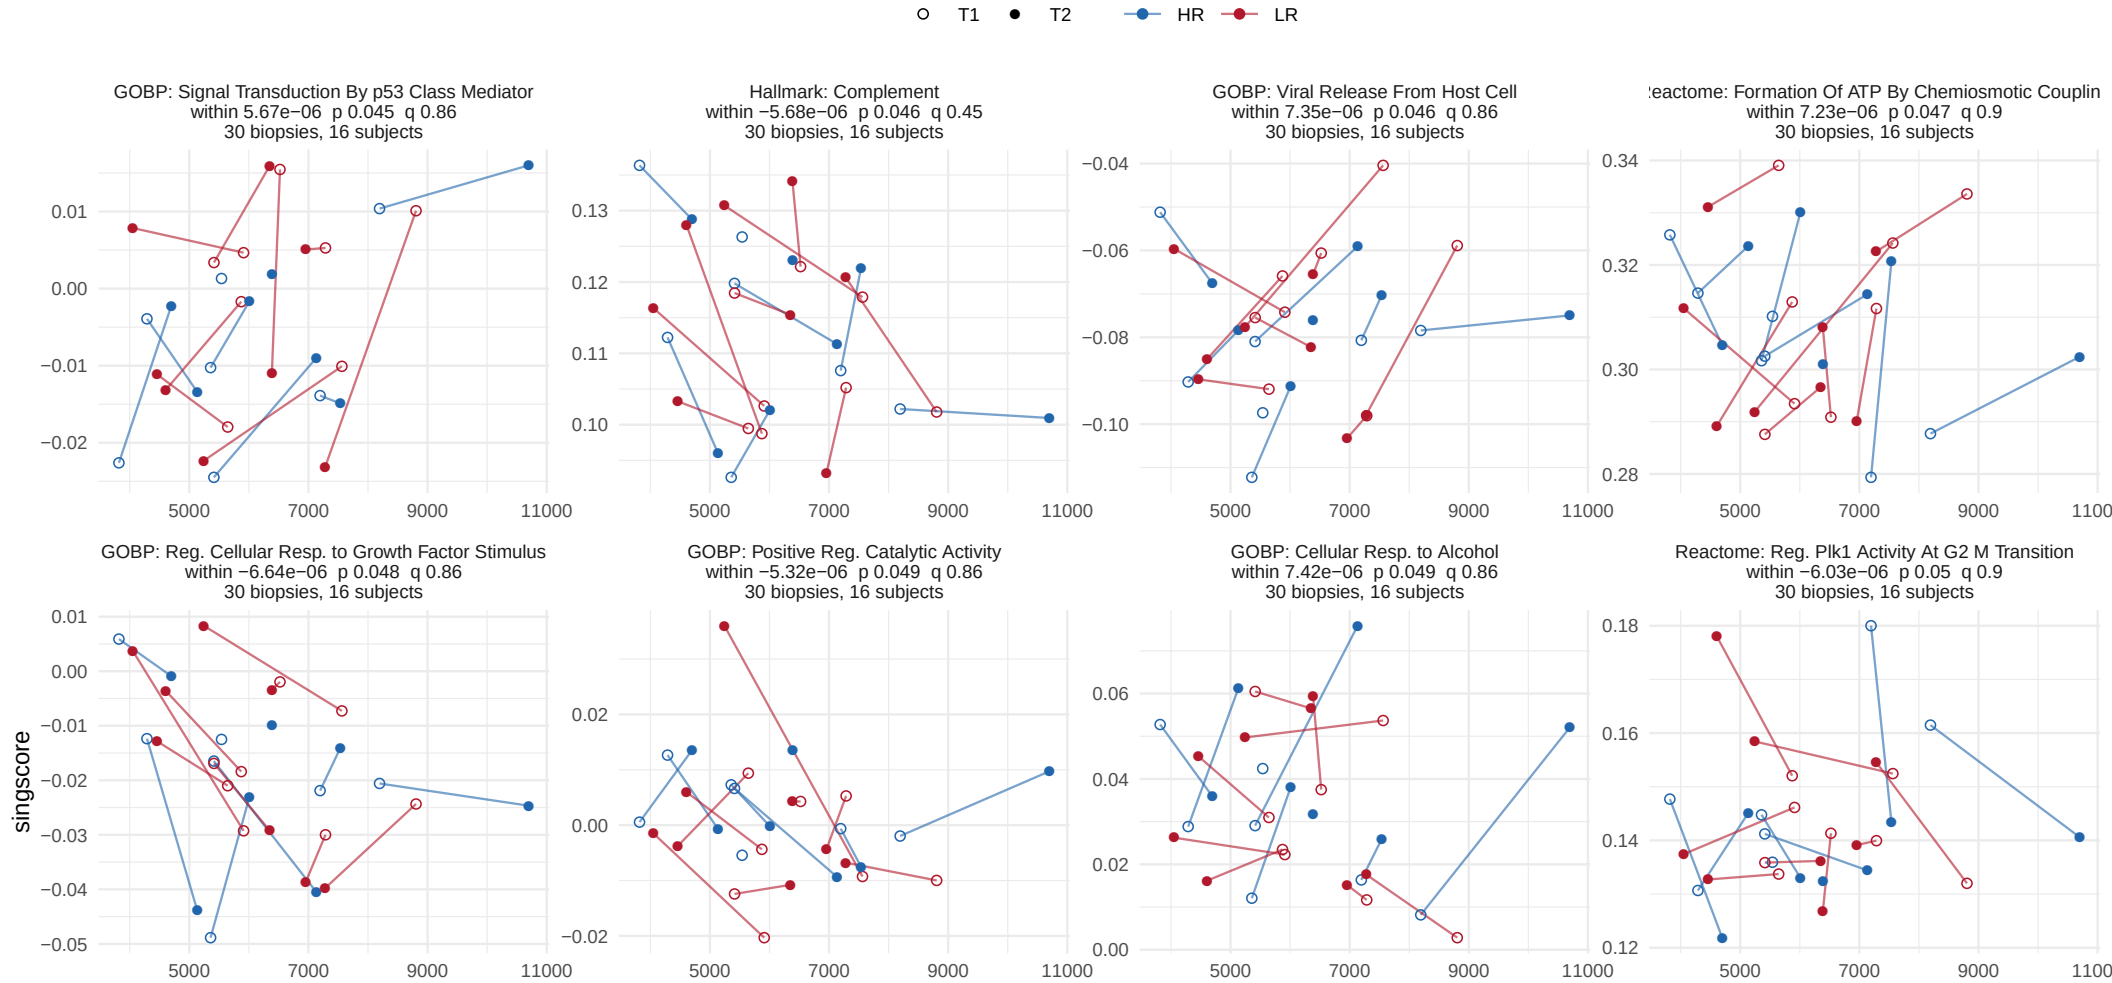

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/05_associate.xlsx, model.

fcsa_mixed, between−person term


73 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 1 of 7.

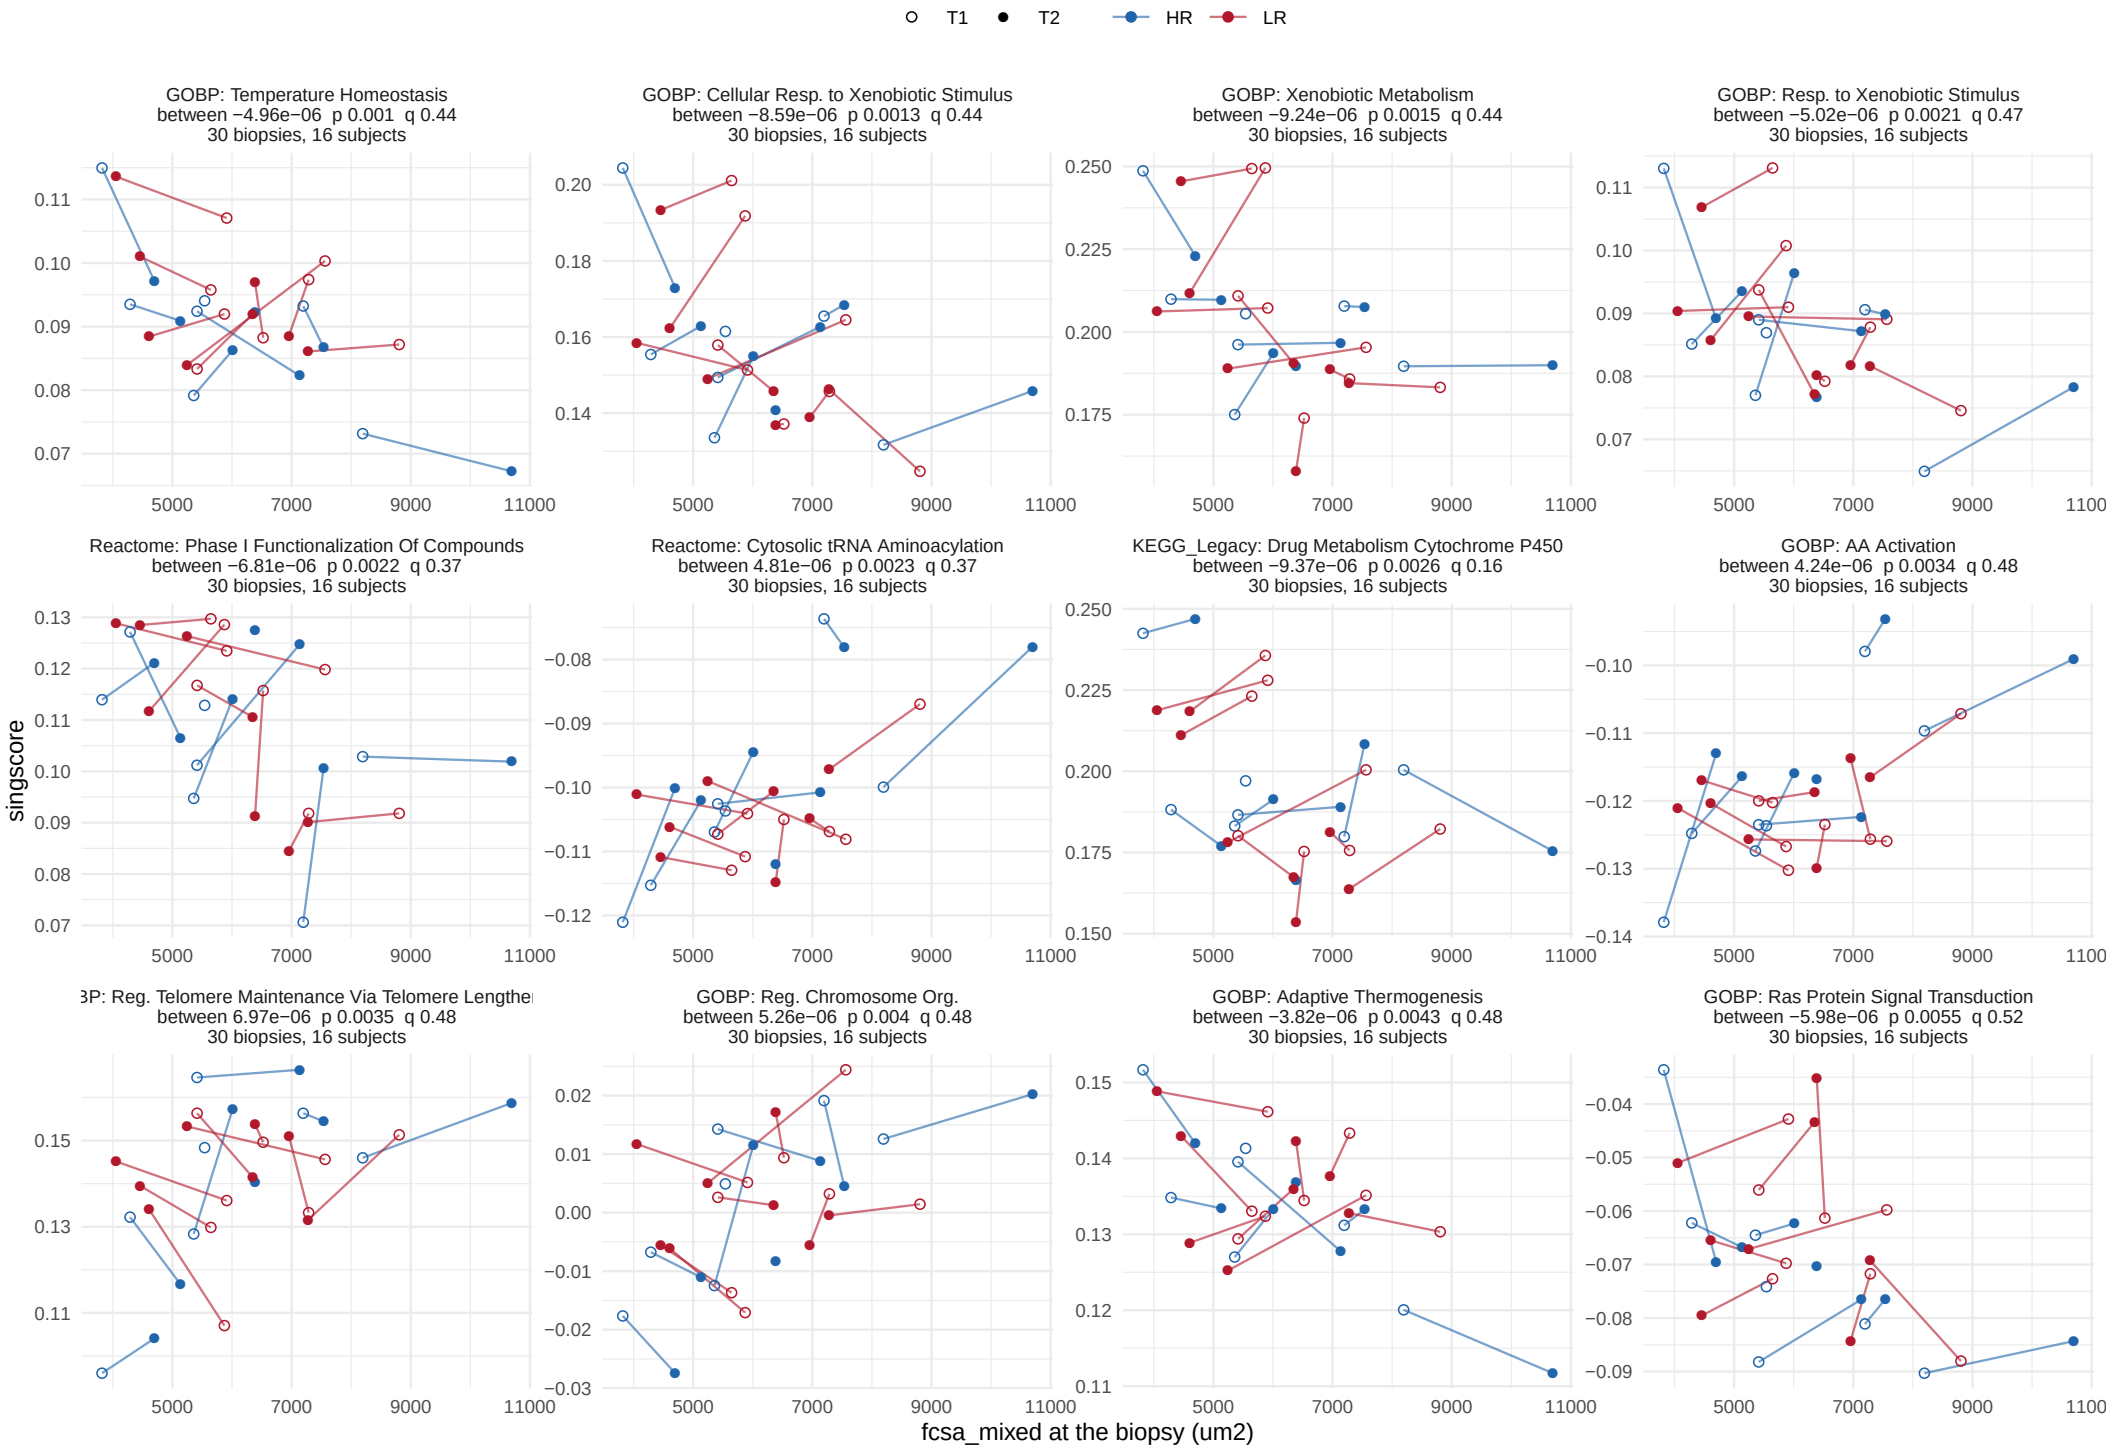

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/05_associate.xlsx, model.

fcsa_mixed, between−person term


73 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 2 of 7.

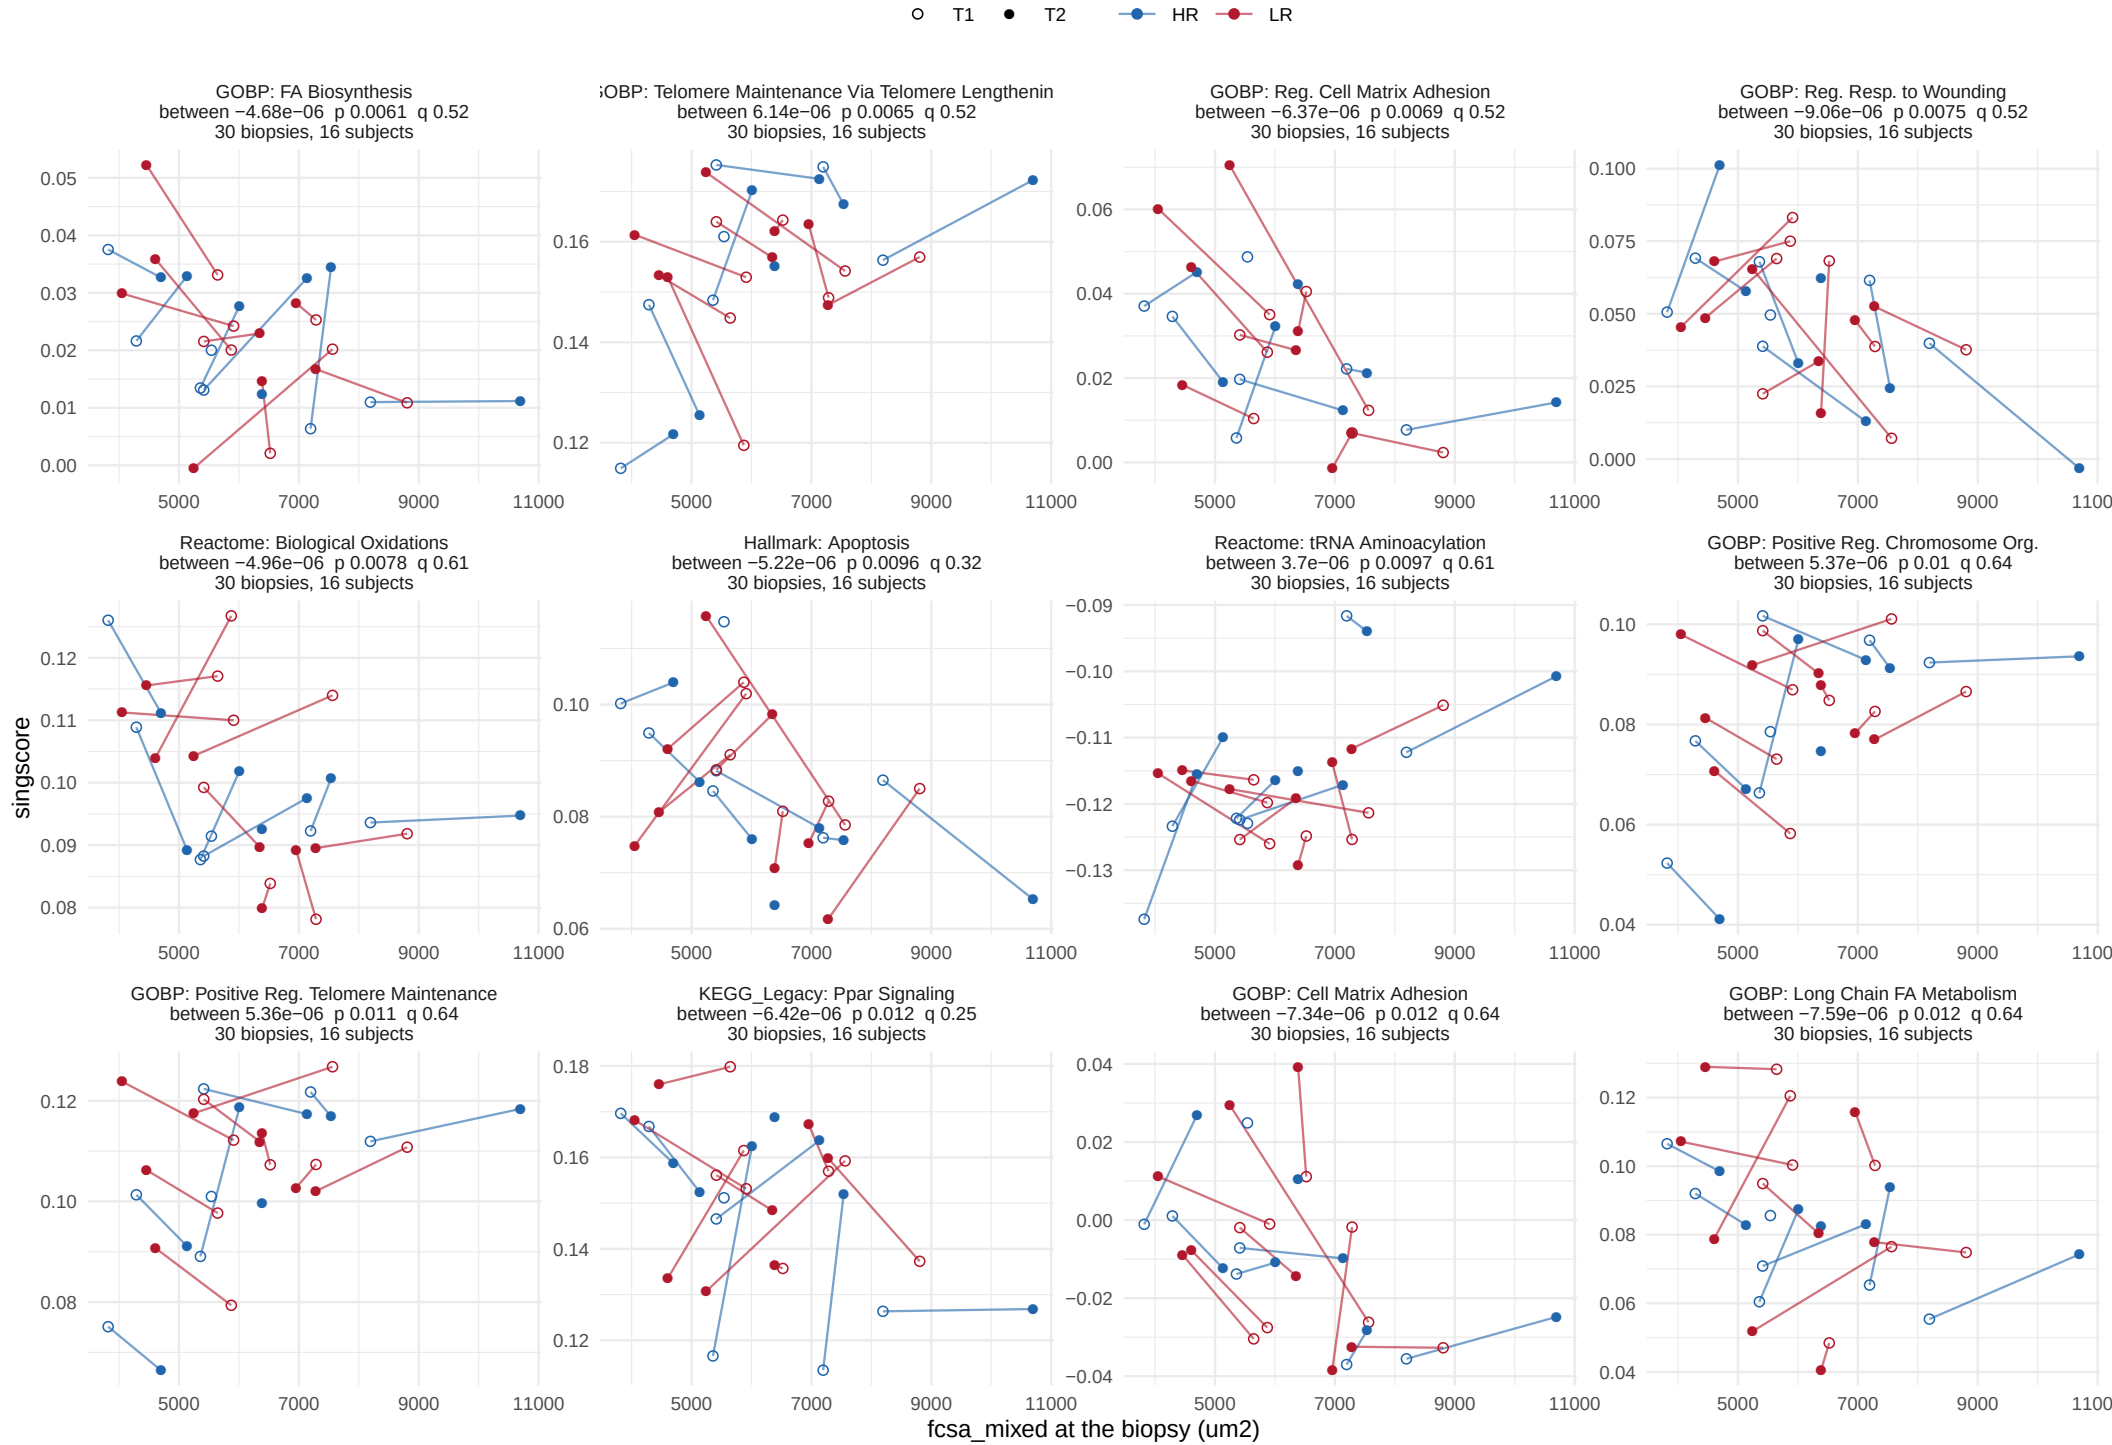

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/05_associate.xlsx, model.

fcsa_mixed, between−person term


73 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 3 of 7.

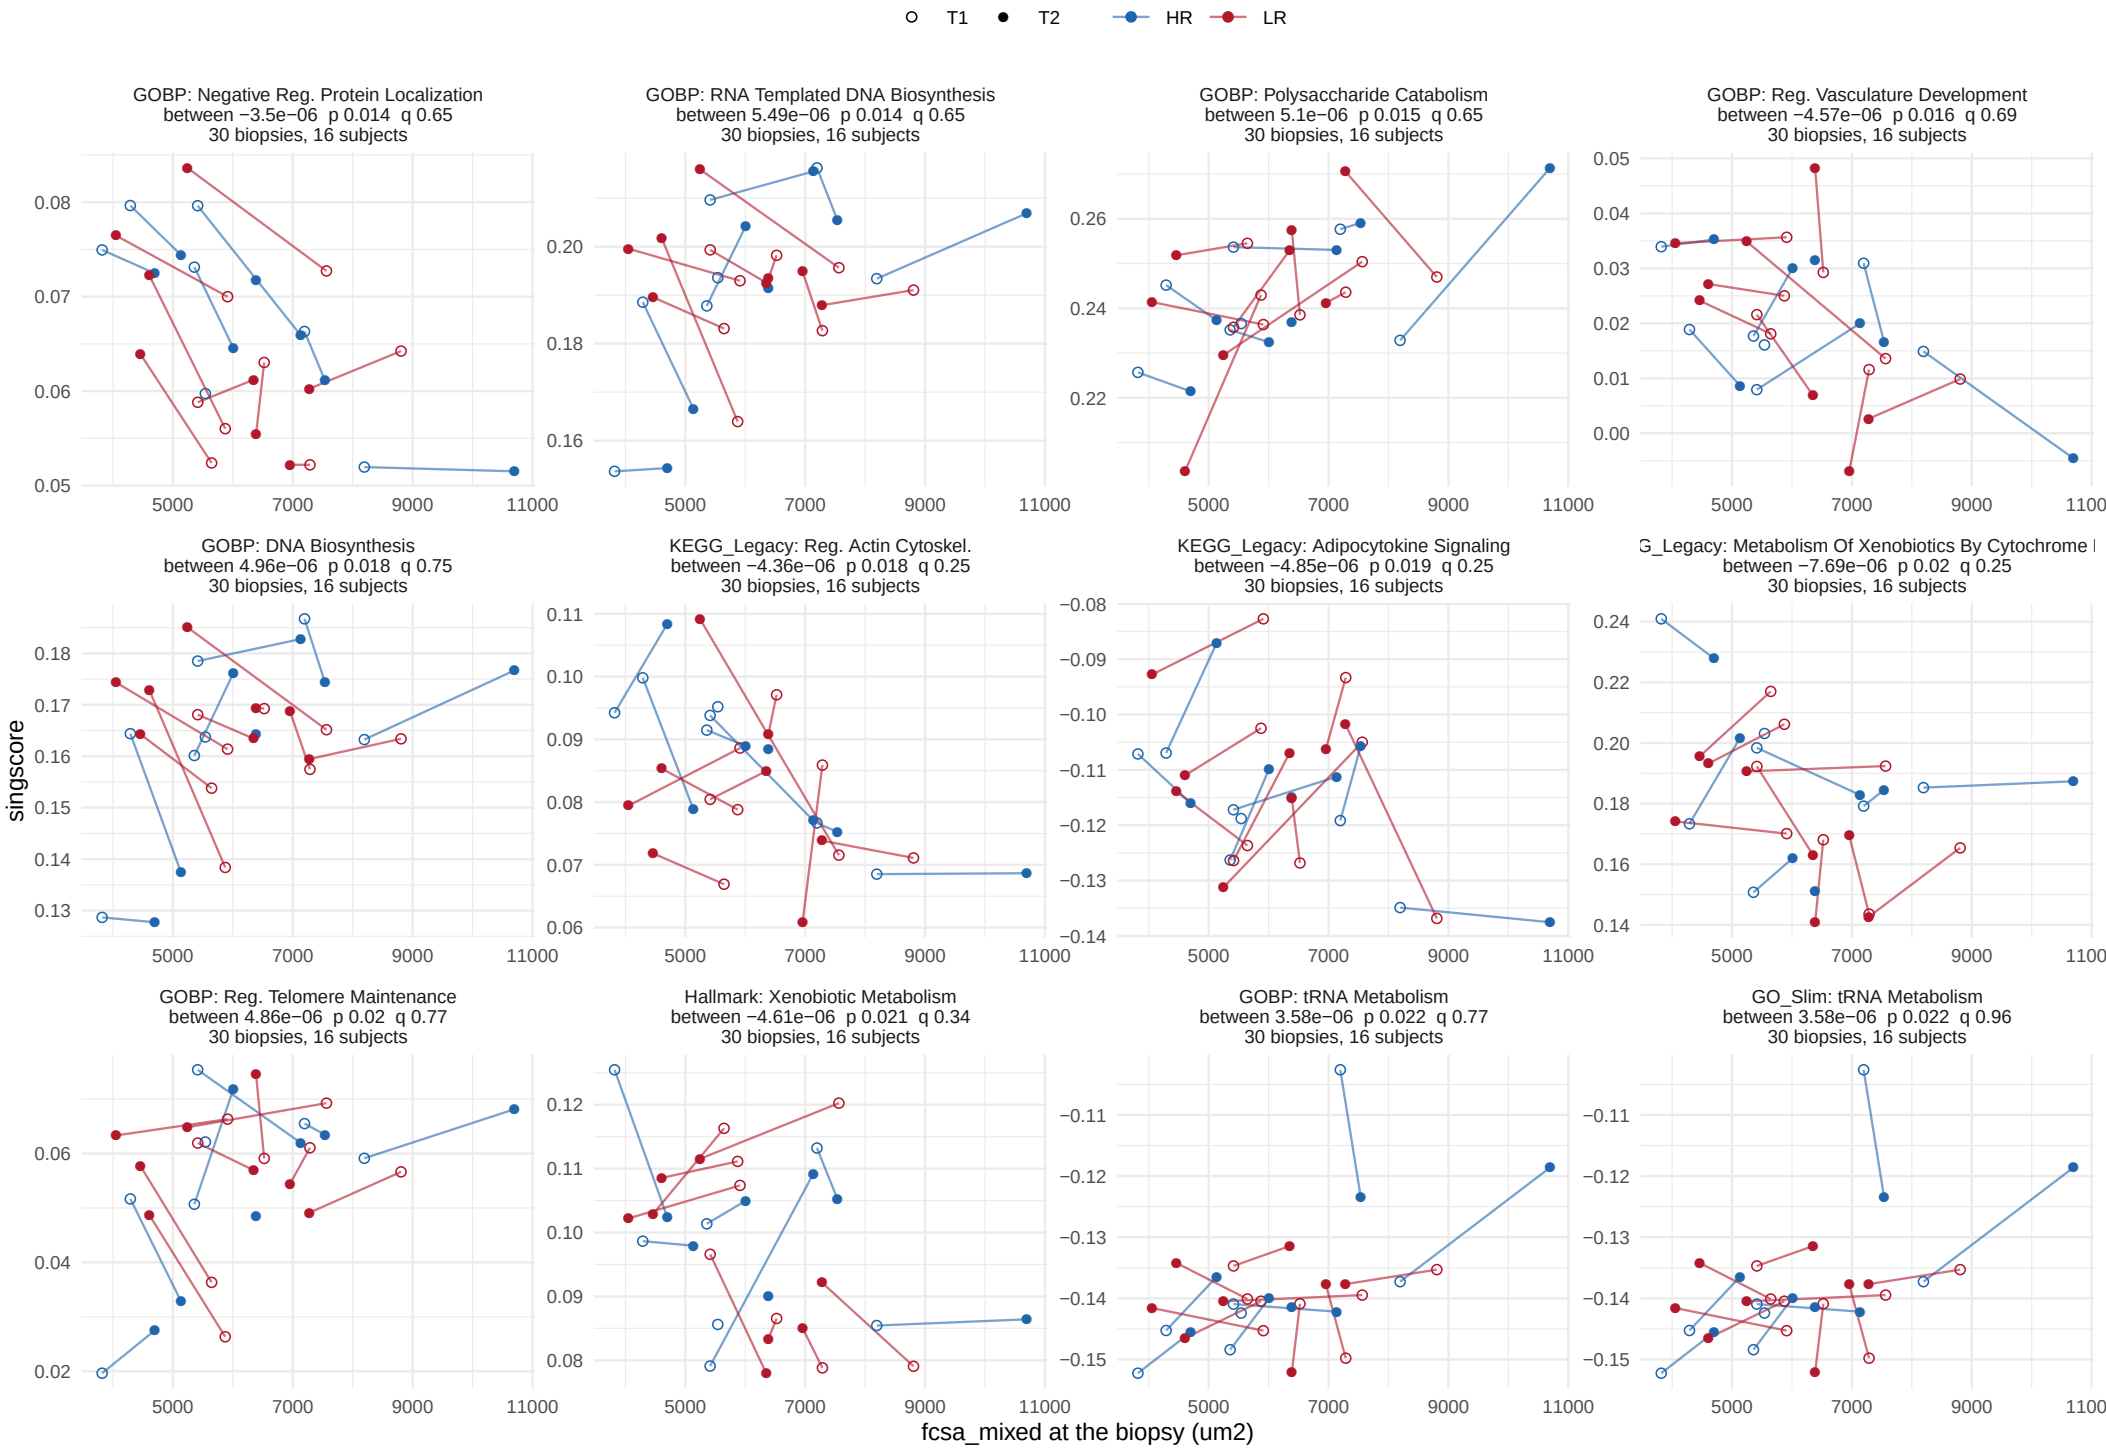

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/05_associate.xlsx, model.

fcsa_mixed, between−person term


73 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 4 of 7.

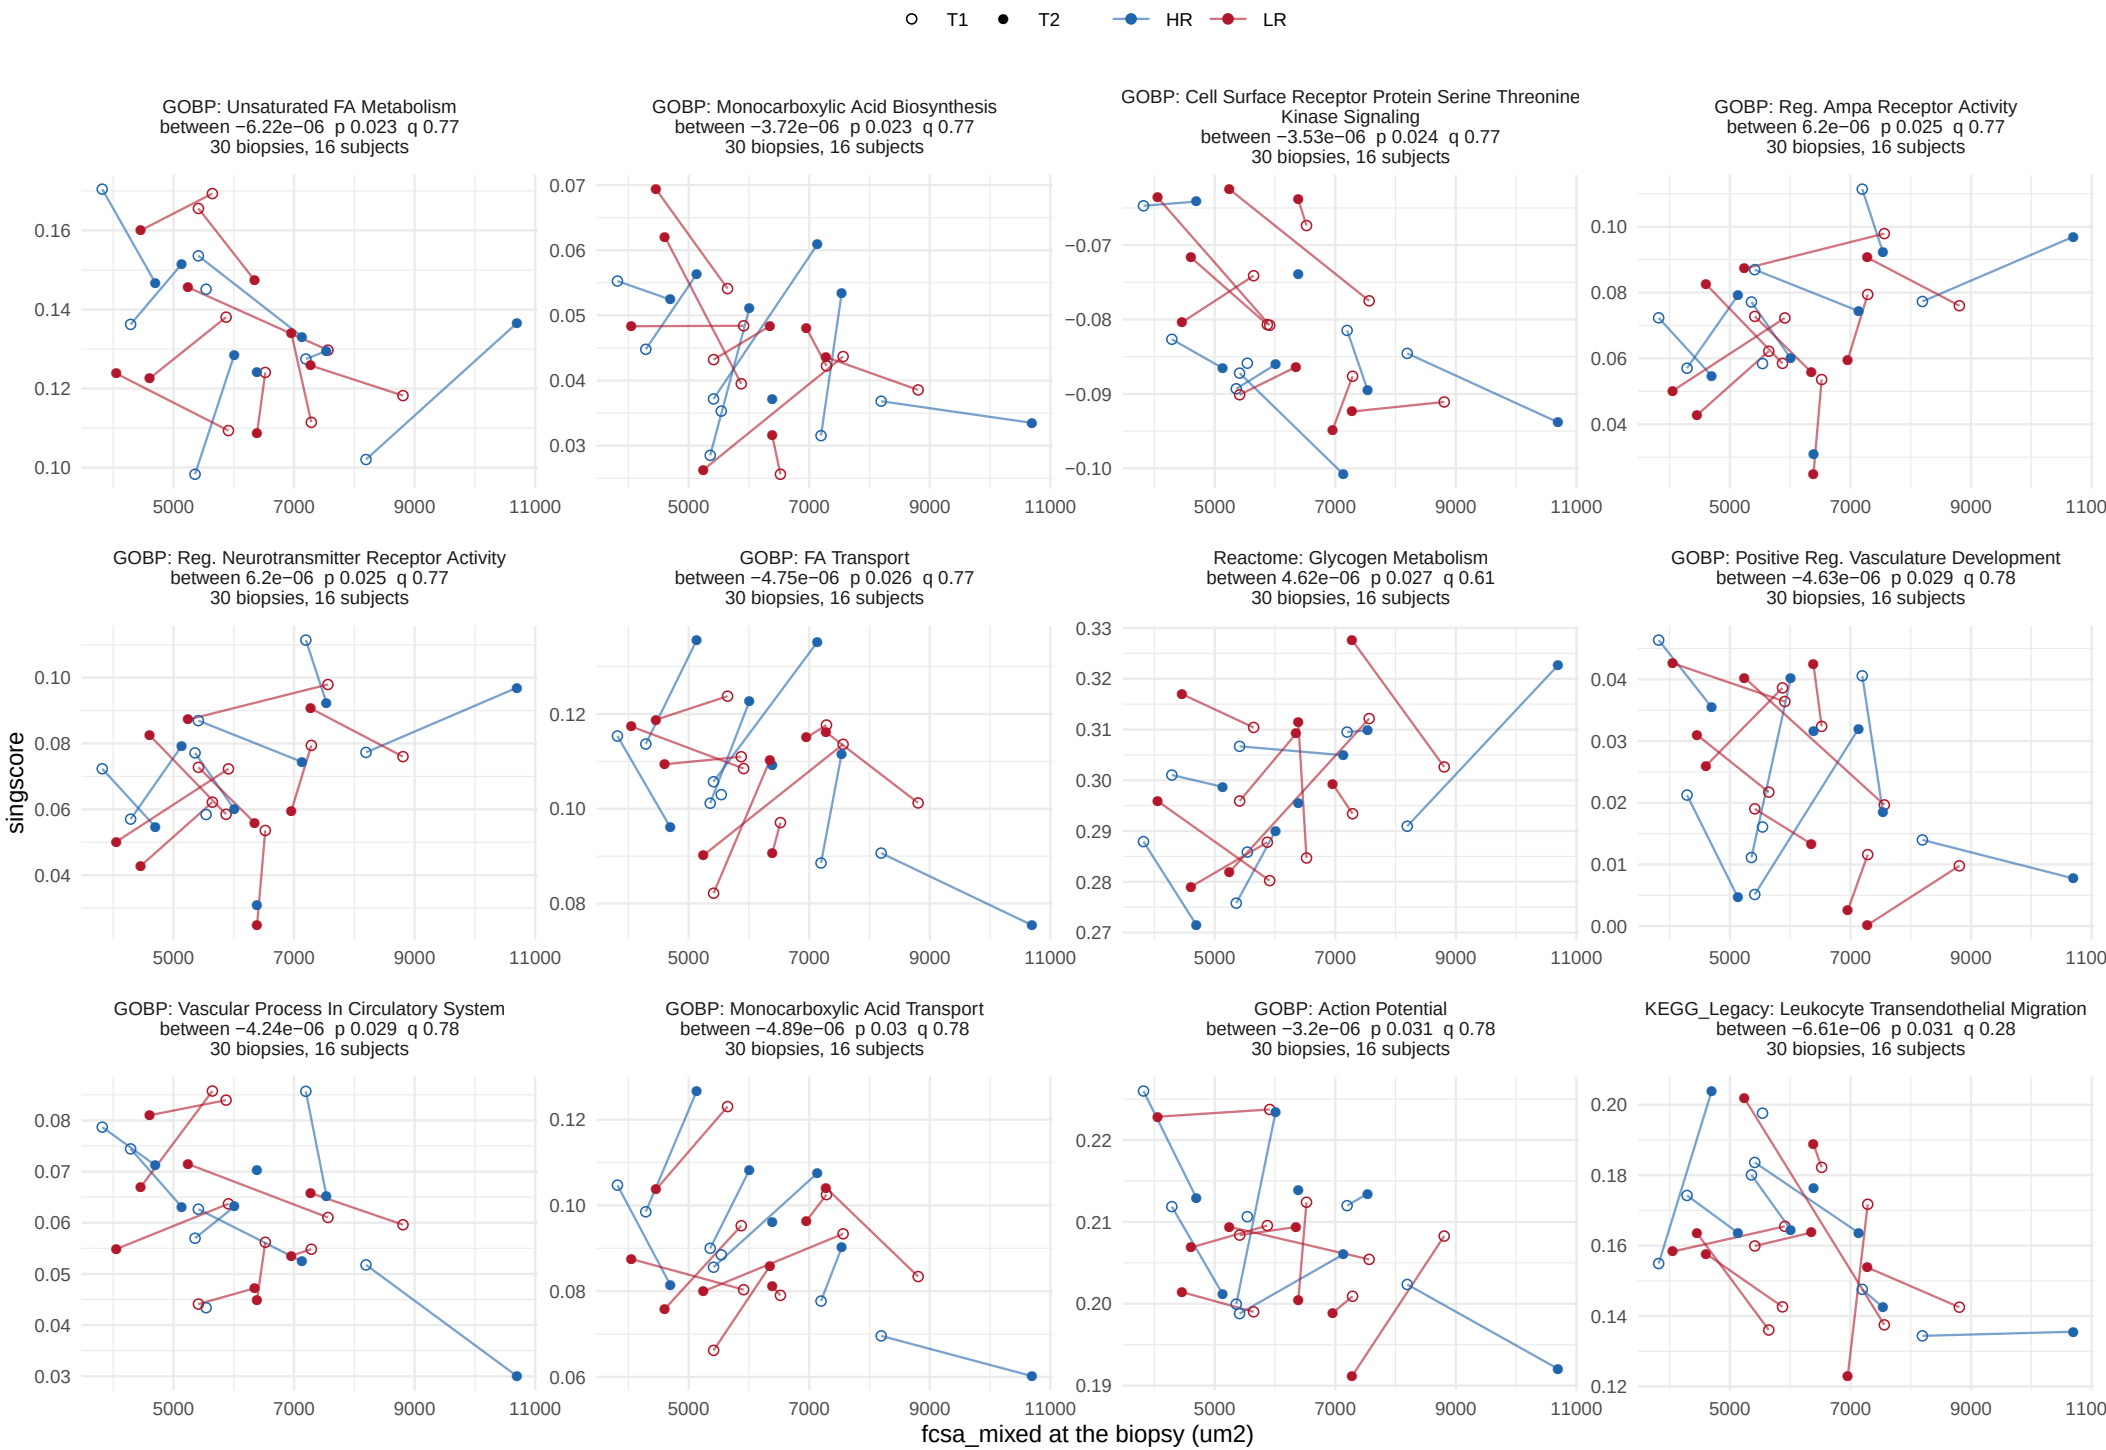

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/05_associate.xlsx, model.

fcsa_mixed, between−person term


73 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 5 of 7.

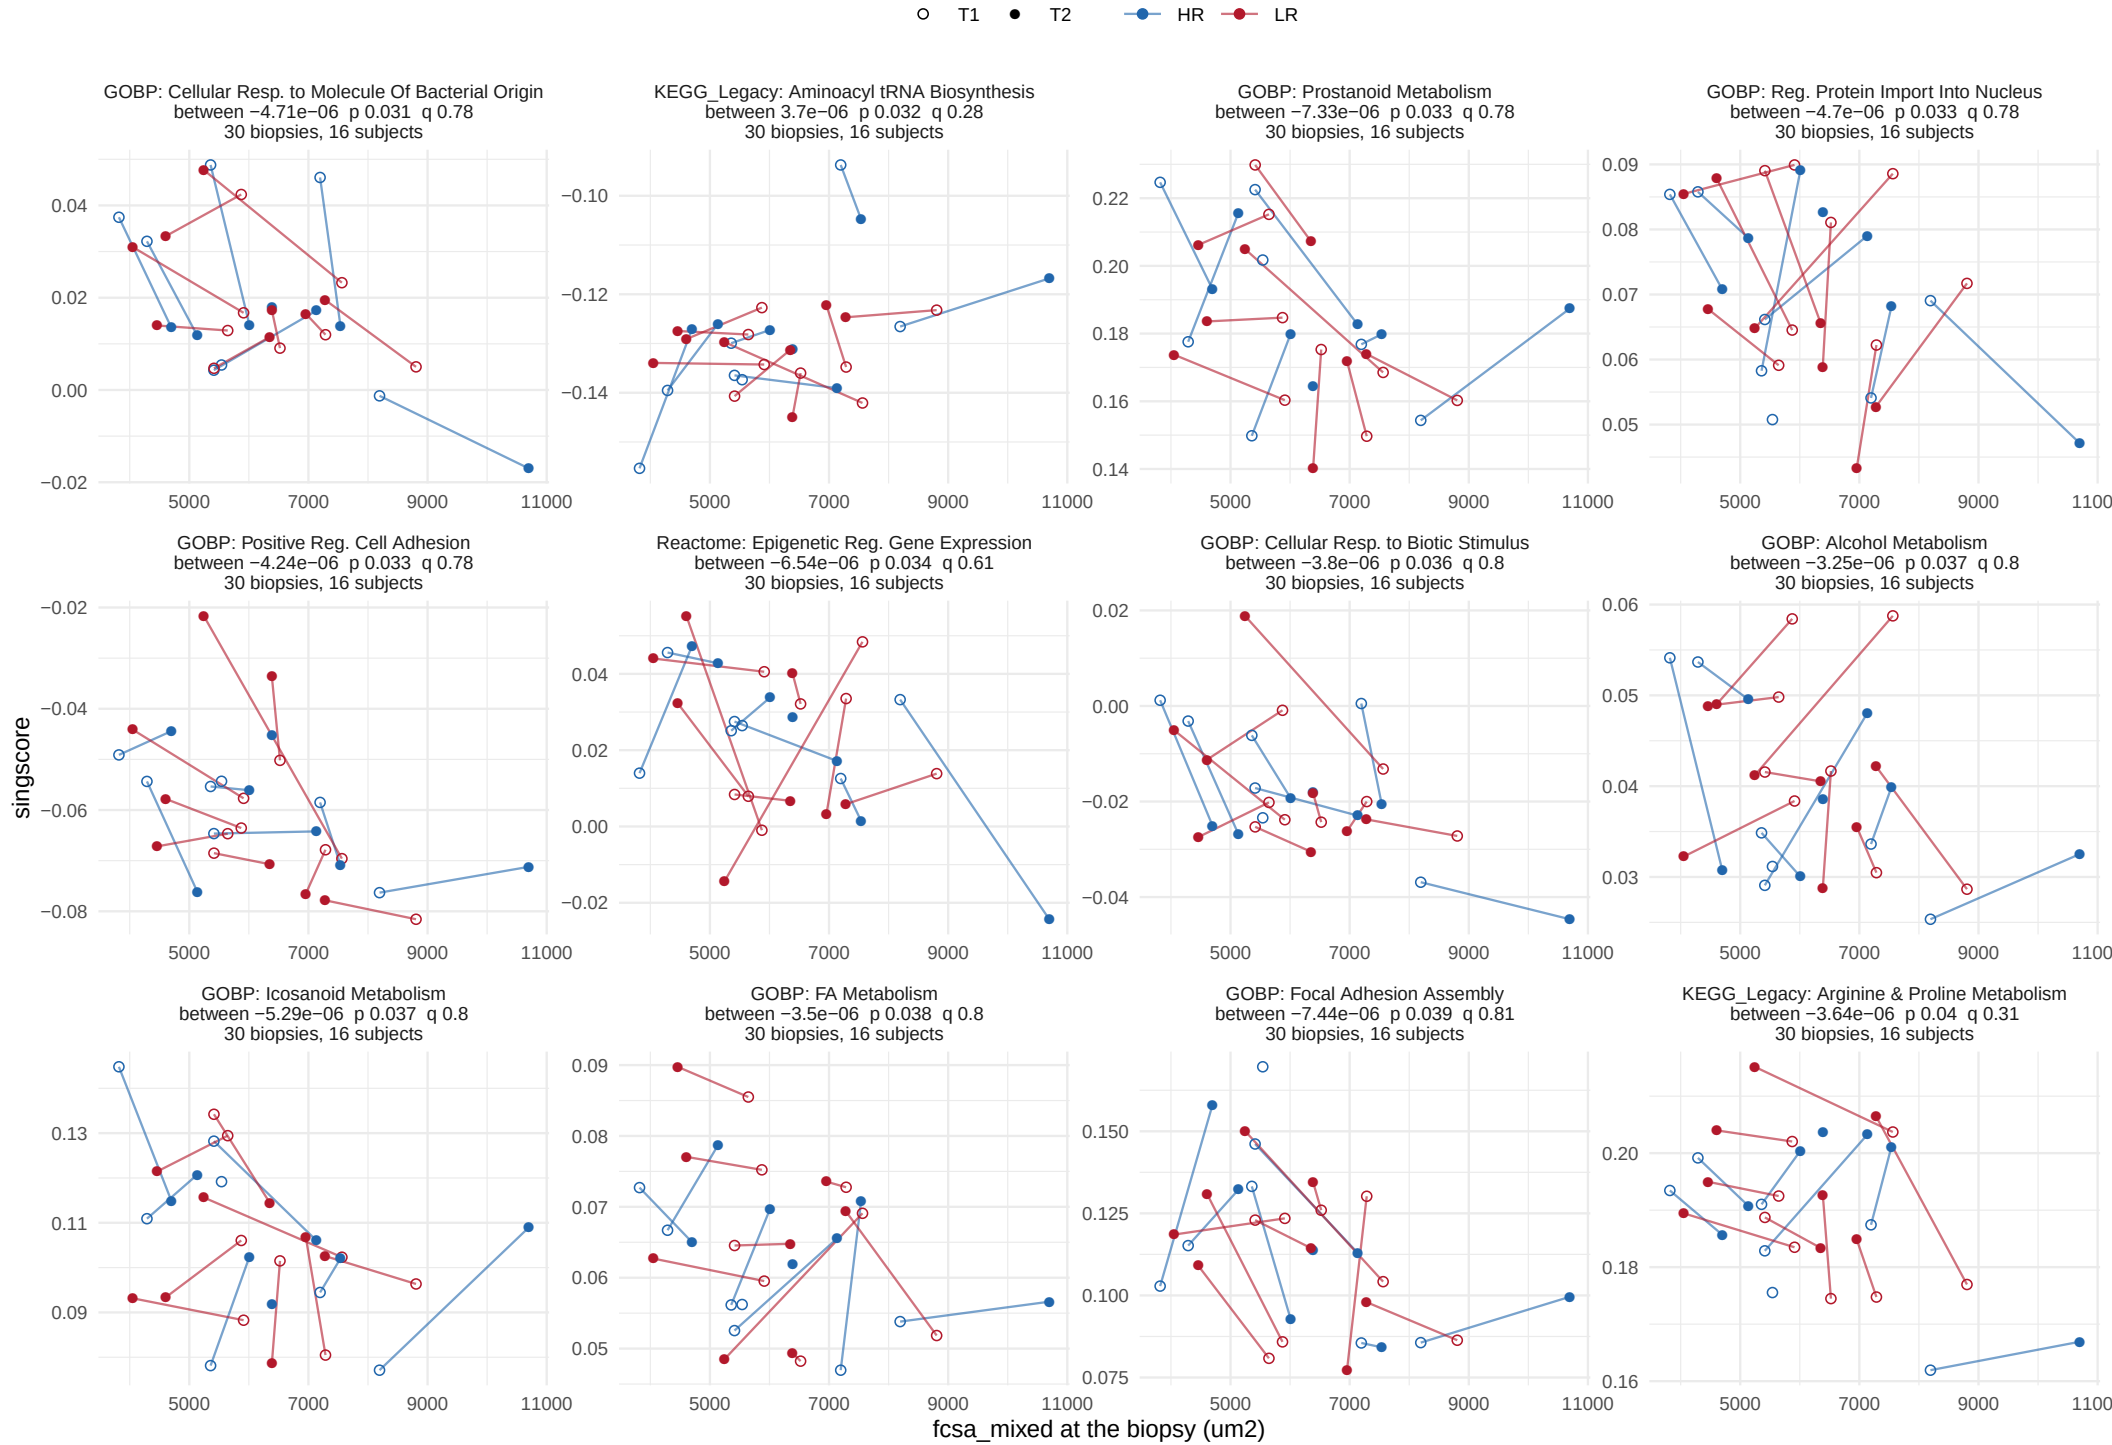

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/05_associate.xlsx, model.

fcsa_mixed, between−person term


73 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 6 of 7.

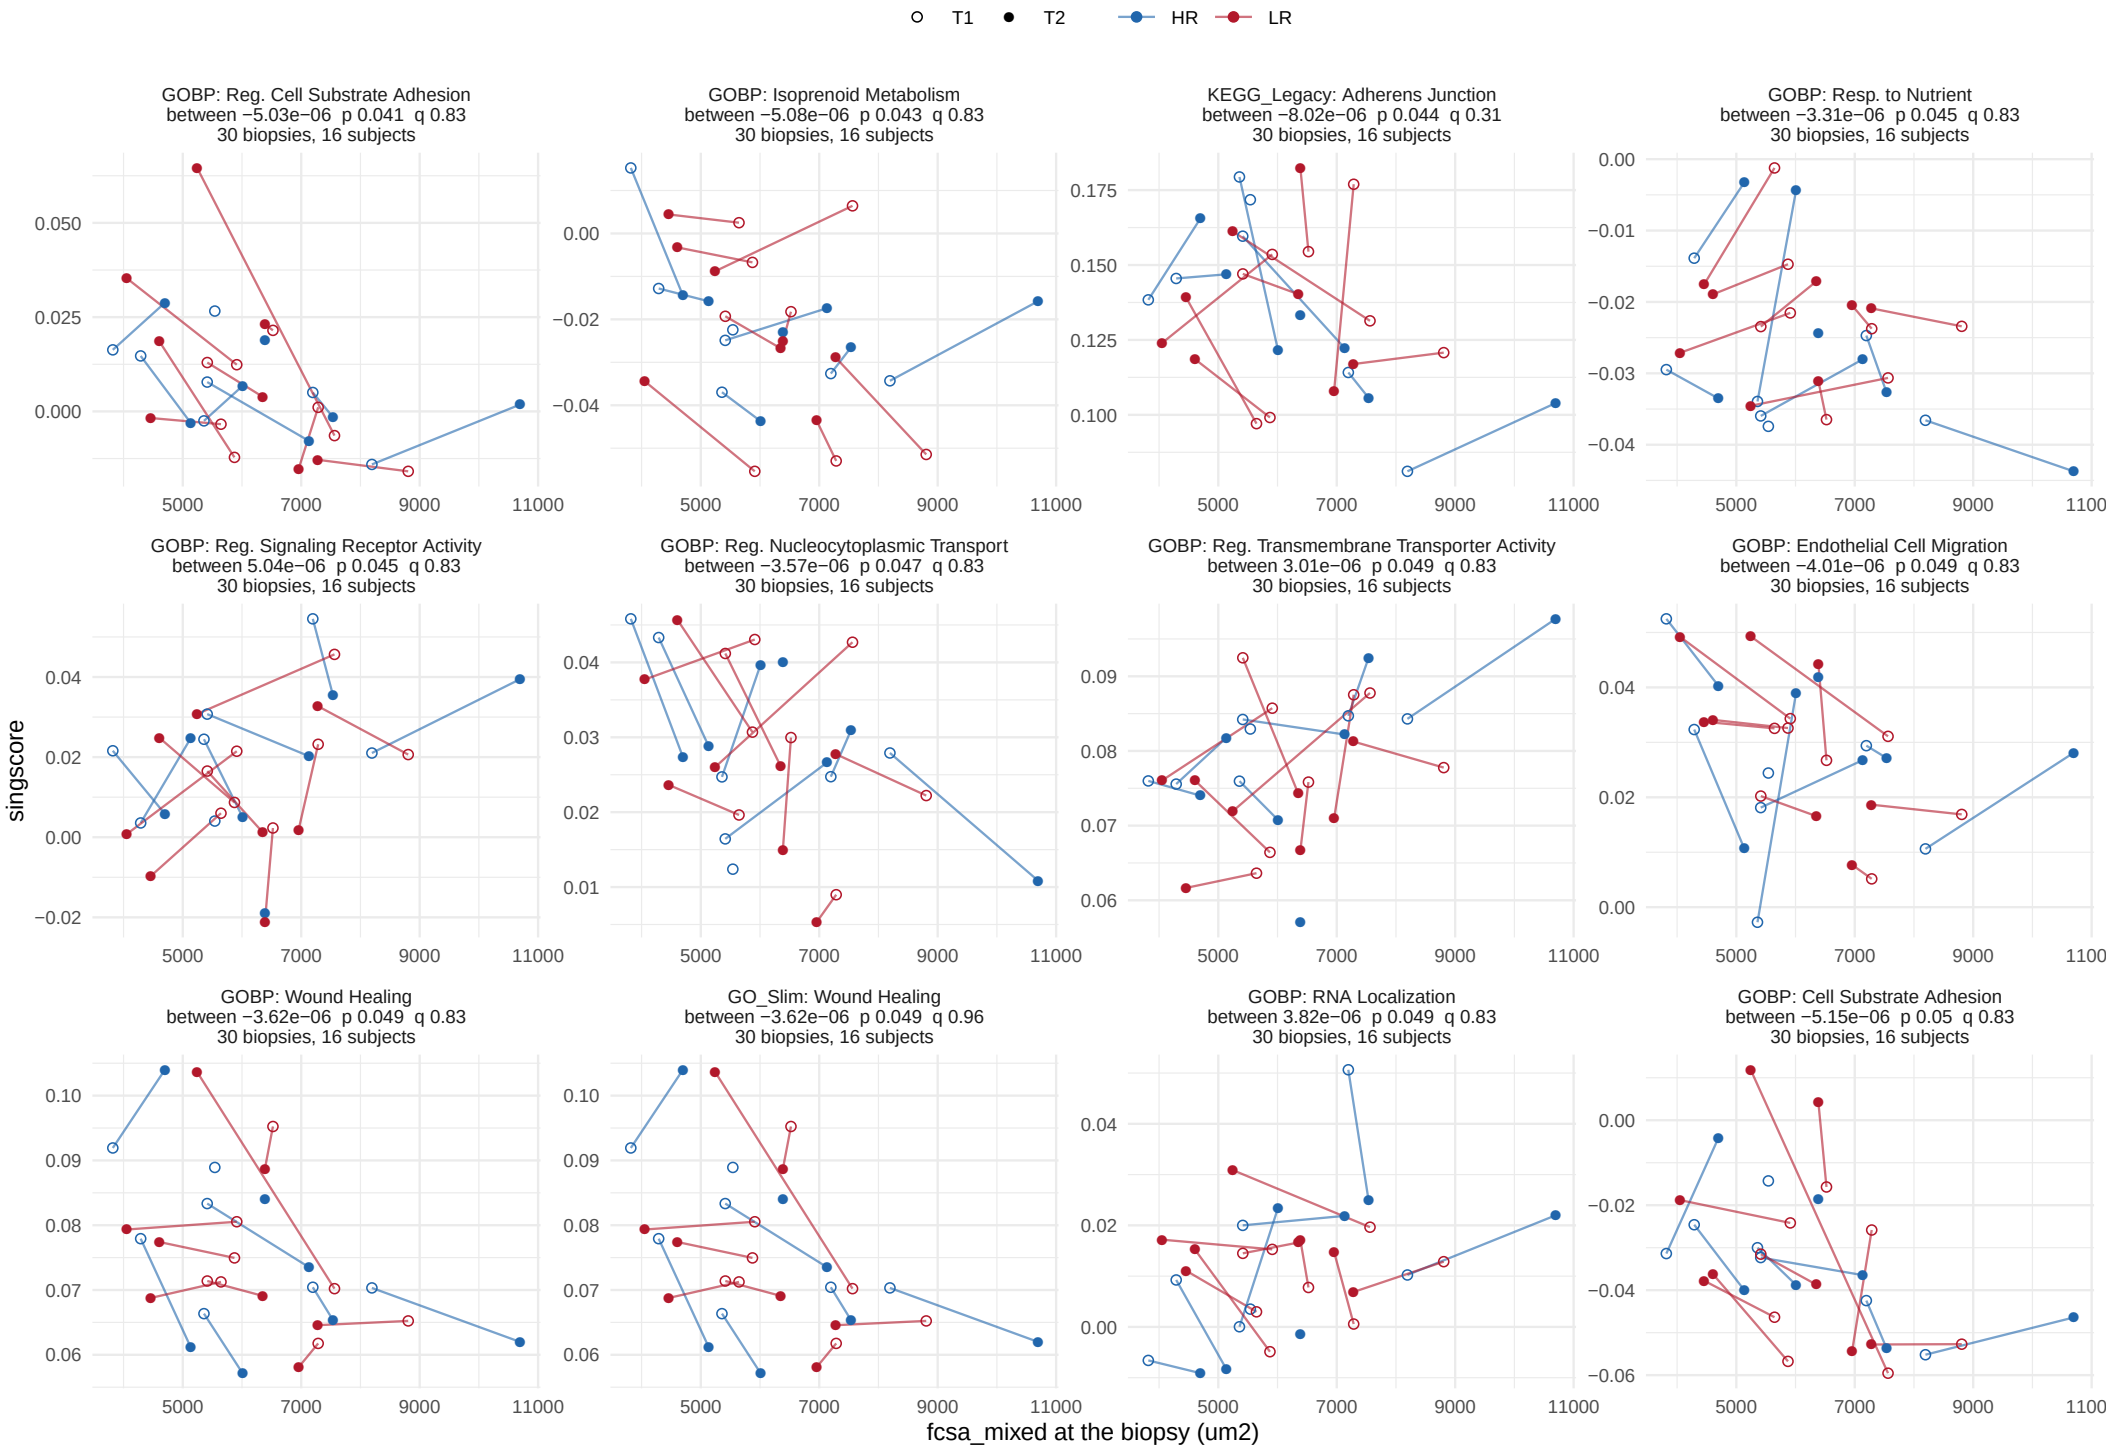

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/05_associate.xlsx, model.

fcsa_mixed, between−person term


73 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 7 of 7.

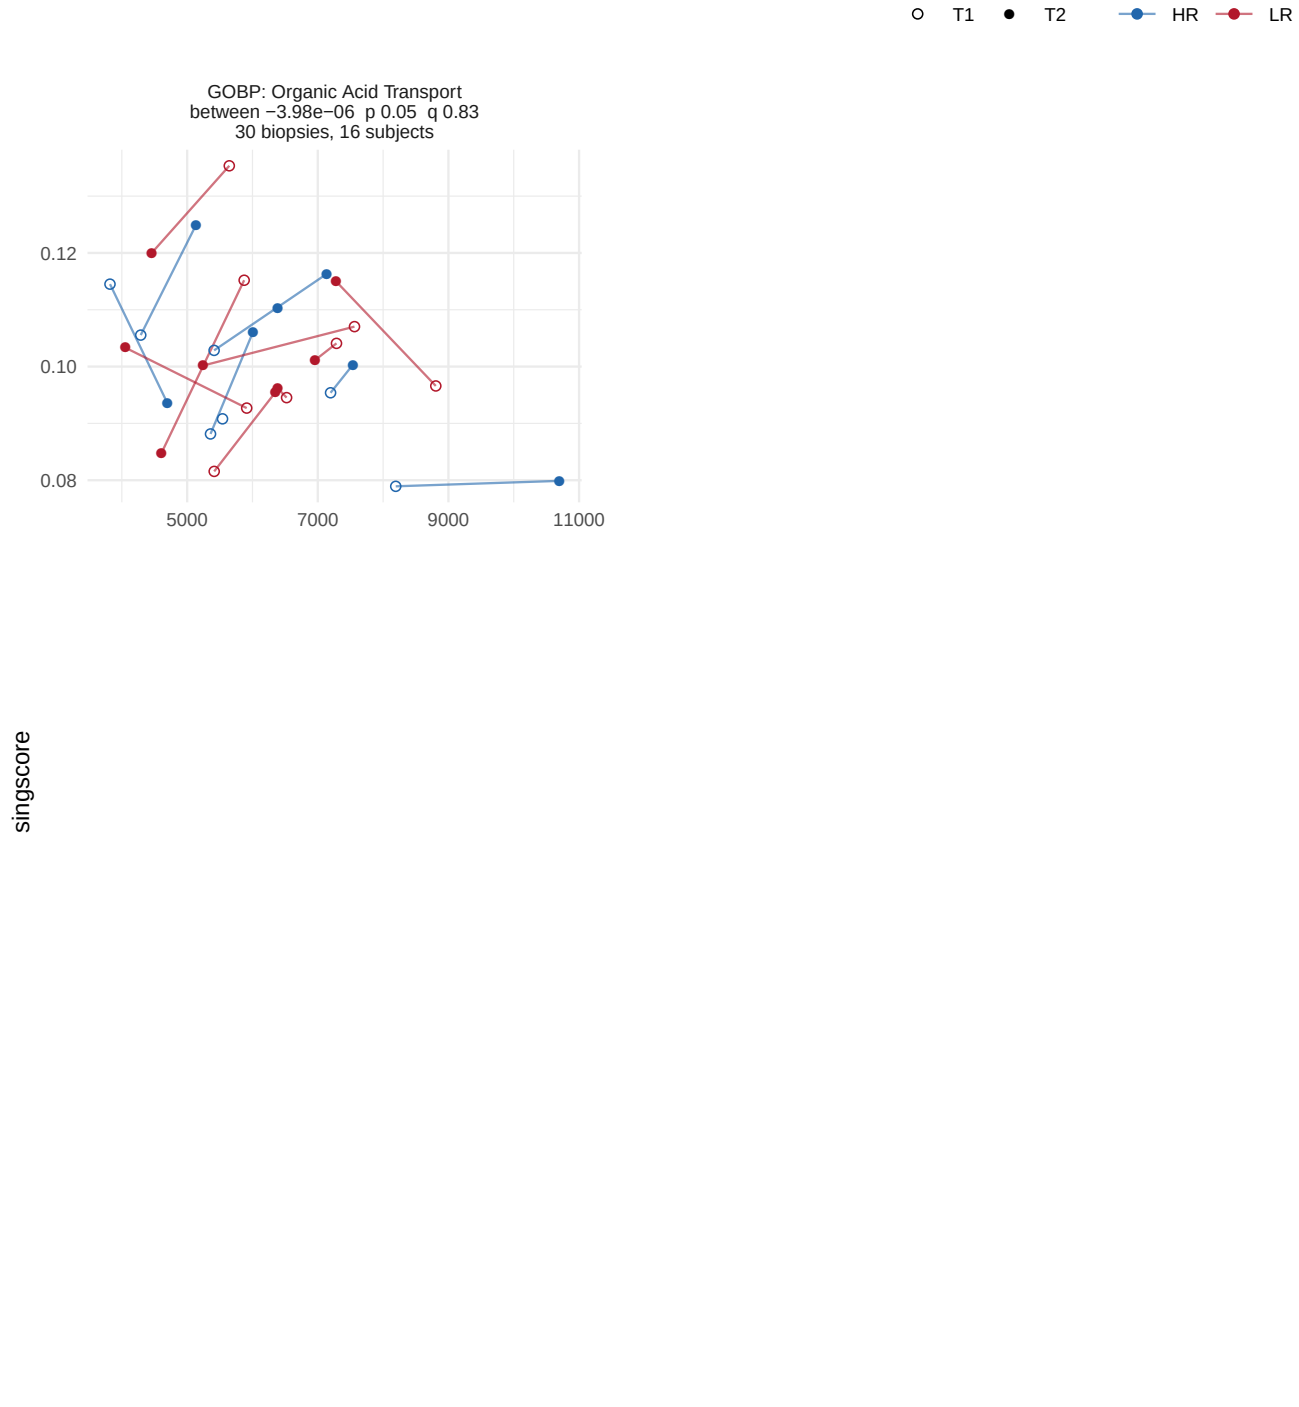

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/05_associate.xlsx, model.

fcsa_type1, within−person term


62 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 1 of 6.

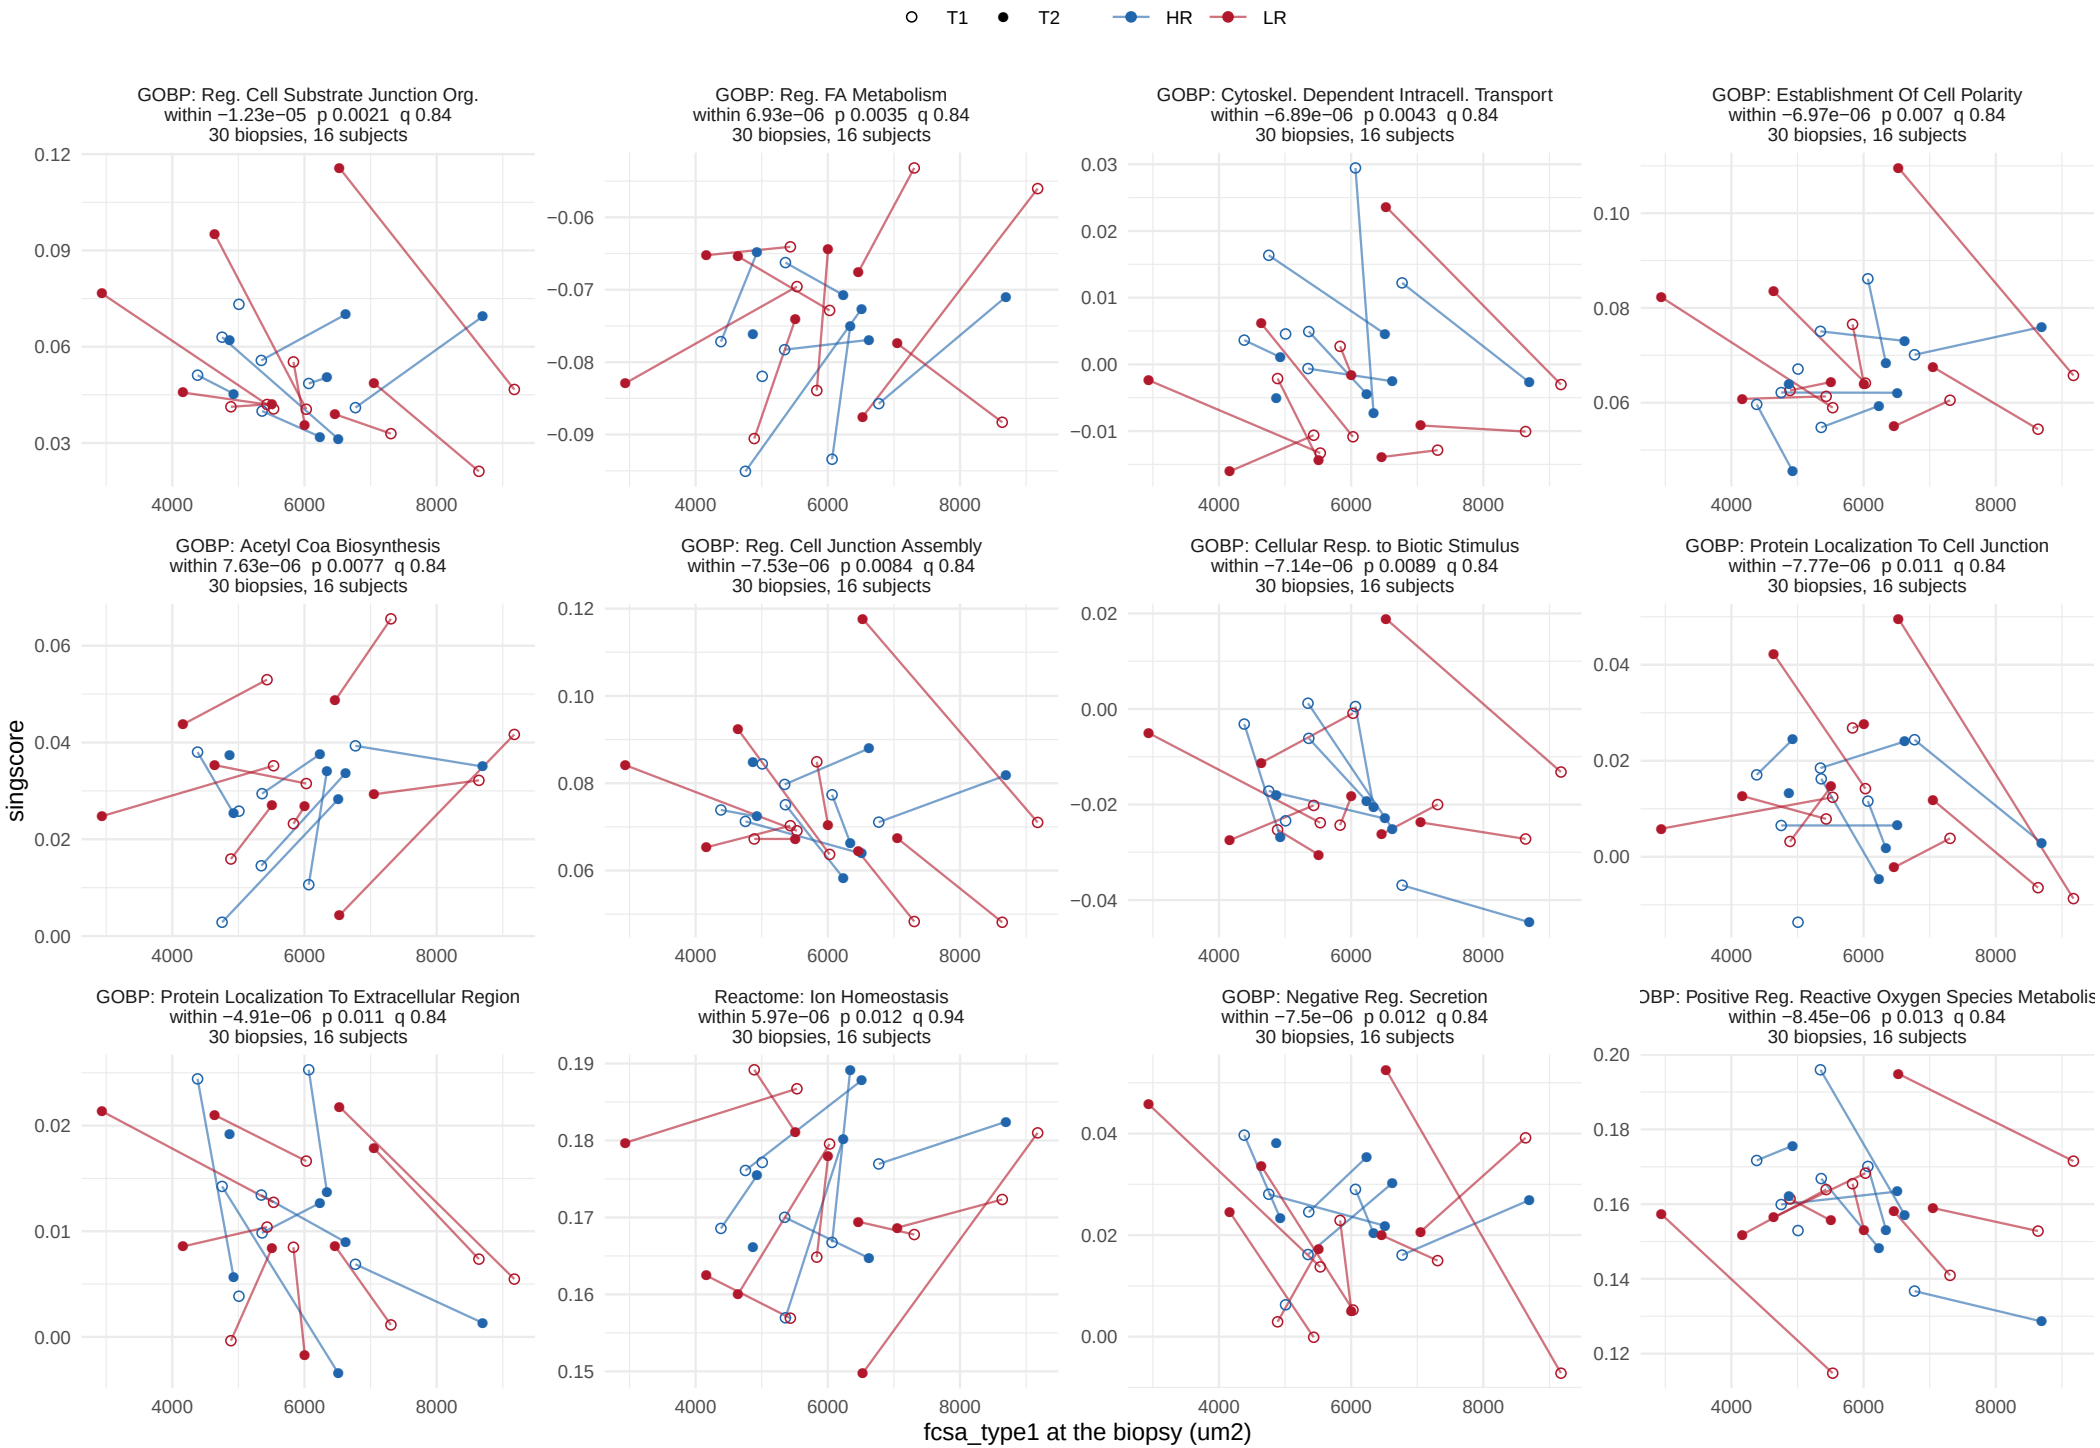

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/05_associate.xlsx, model.

fcsa_type1, within−person term


62 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 2 of 6.

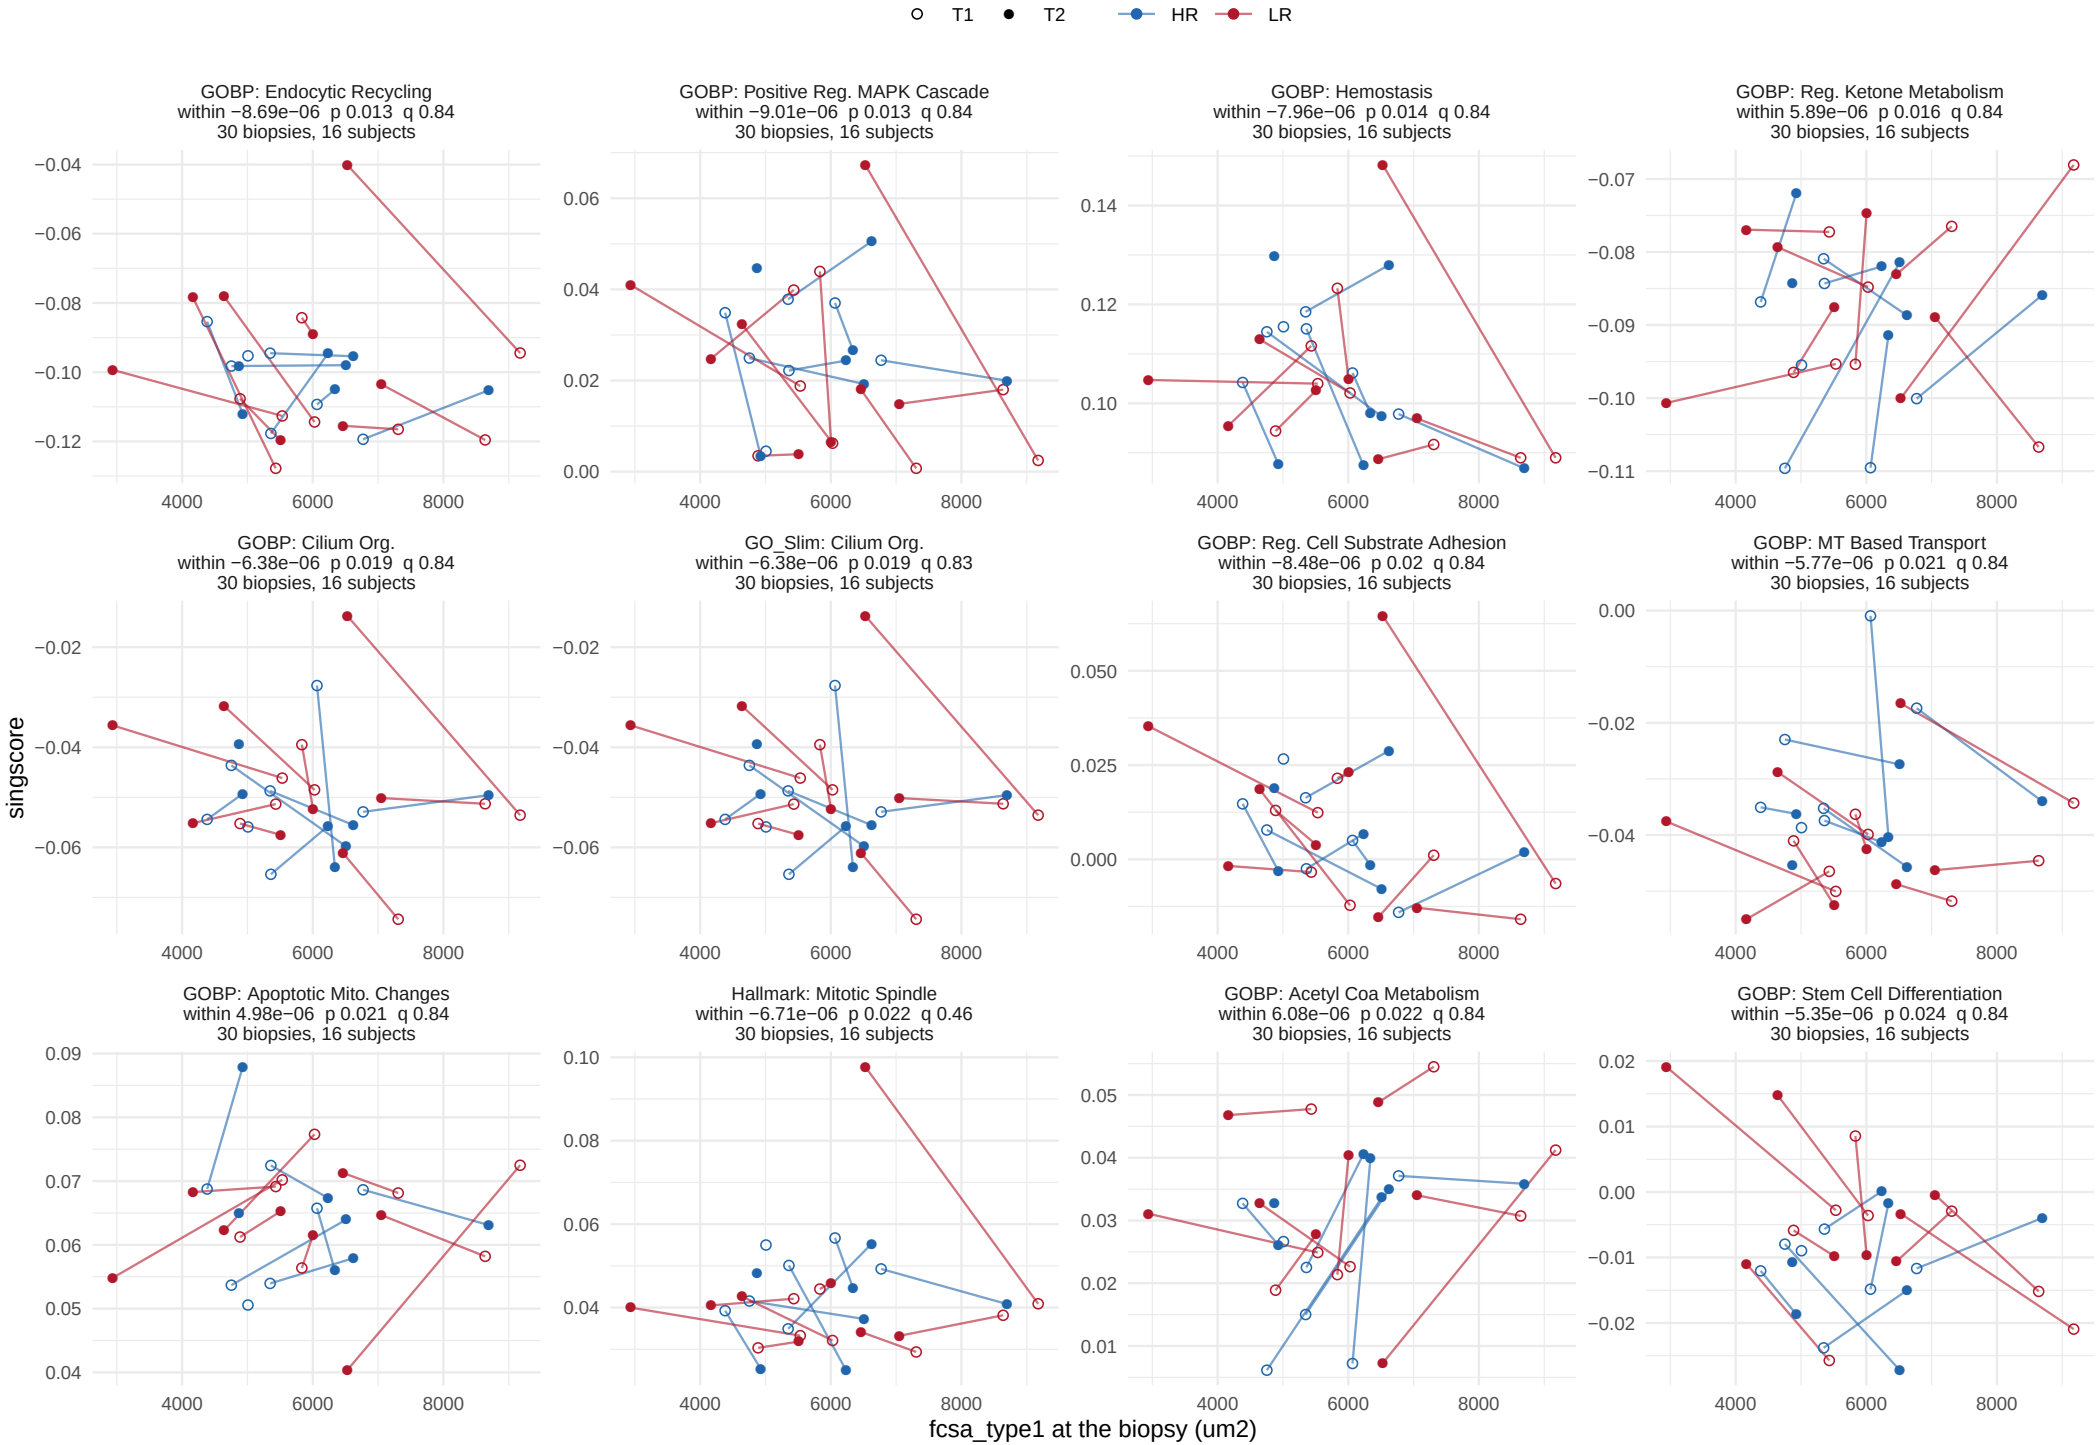

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/05_associate.xlsx, model.

fcsa_type1, within−person term


62 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 3 of 6.

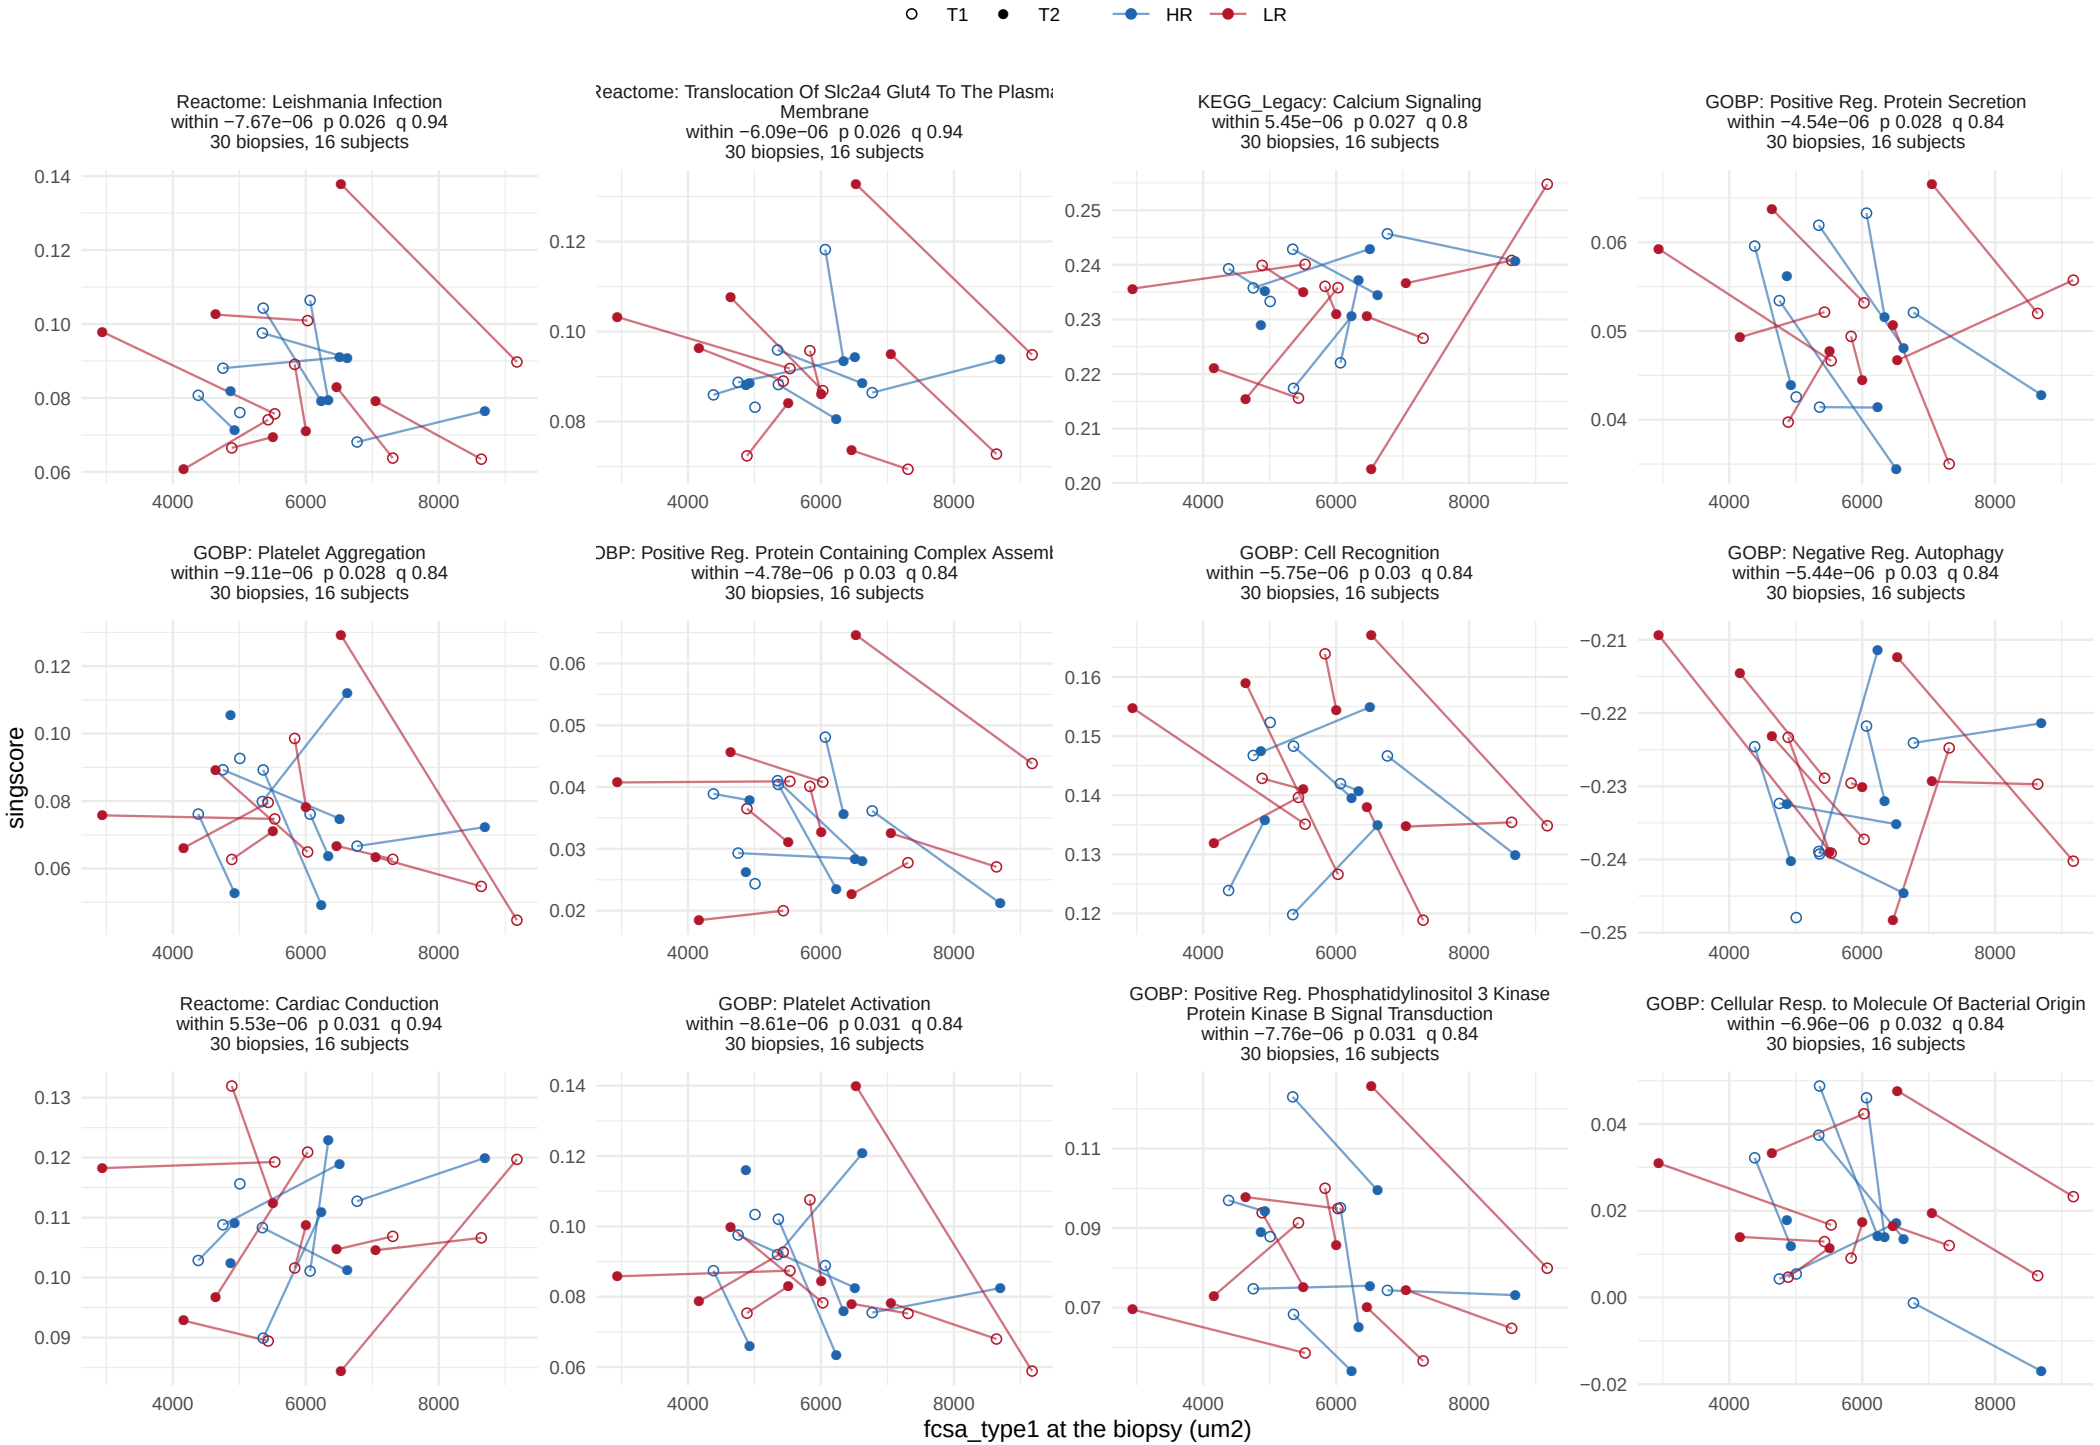

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/05_associate.xlsx, model.

fcsa_type1, within−person term


62 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 4 of 6.

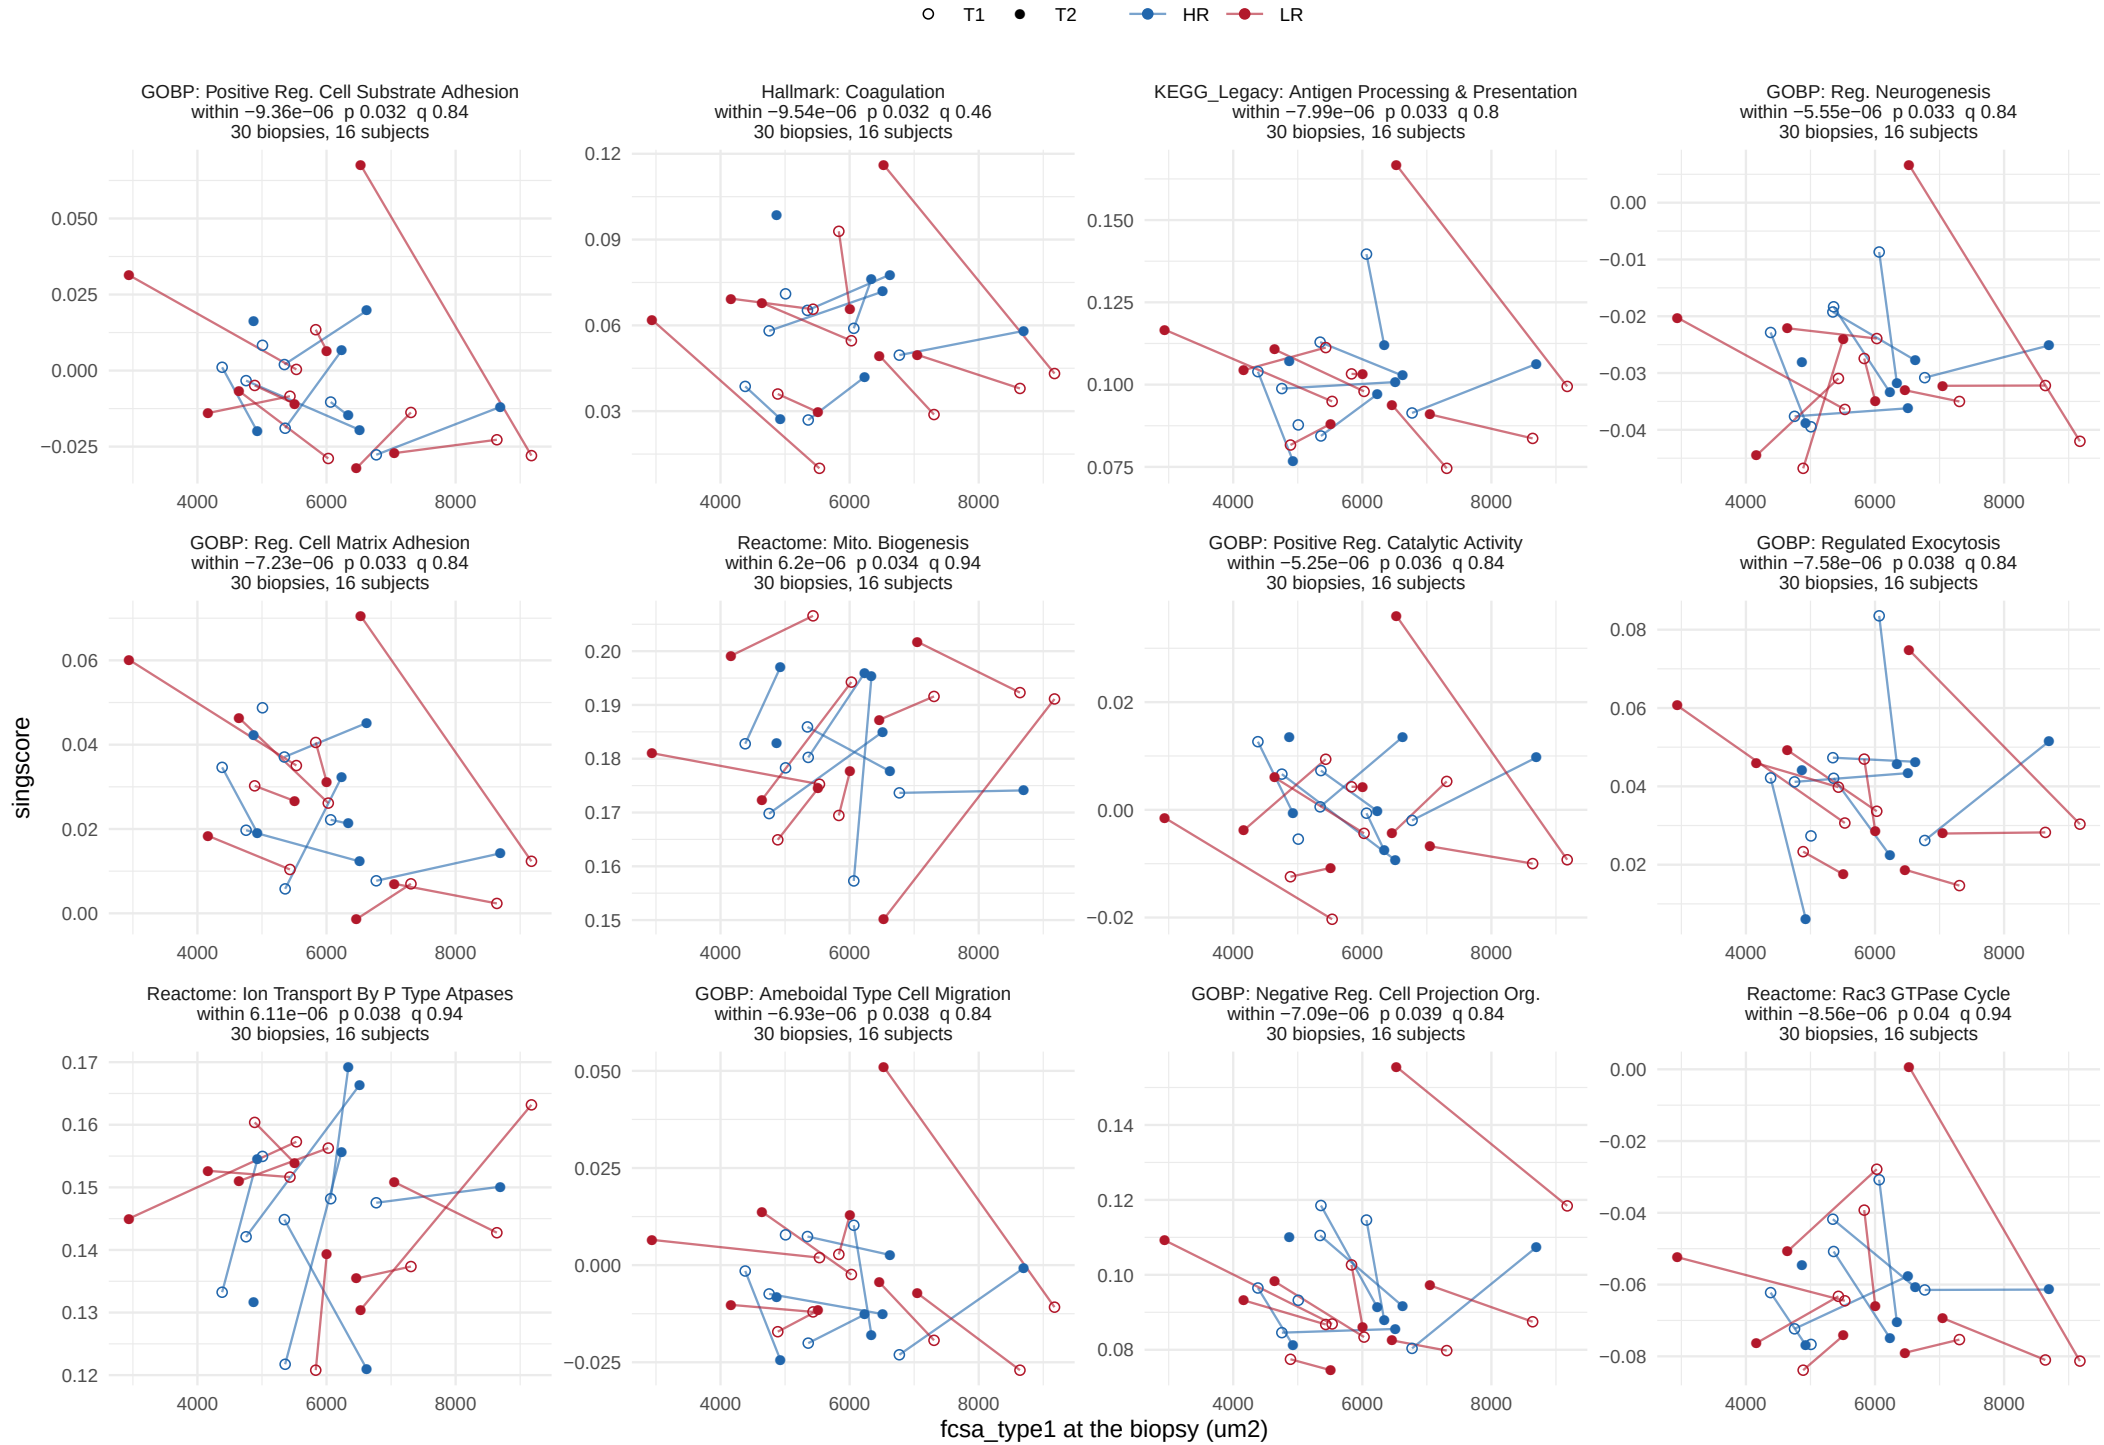

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/05_associate.xlsx, model.

fcsa_type1, within−person term


62 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 5 of 6.

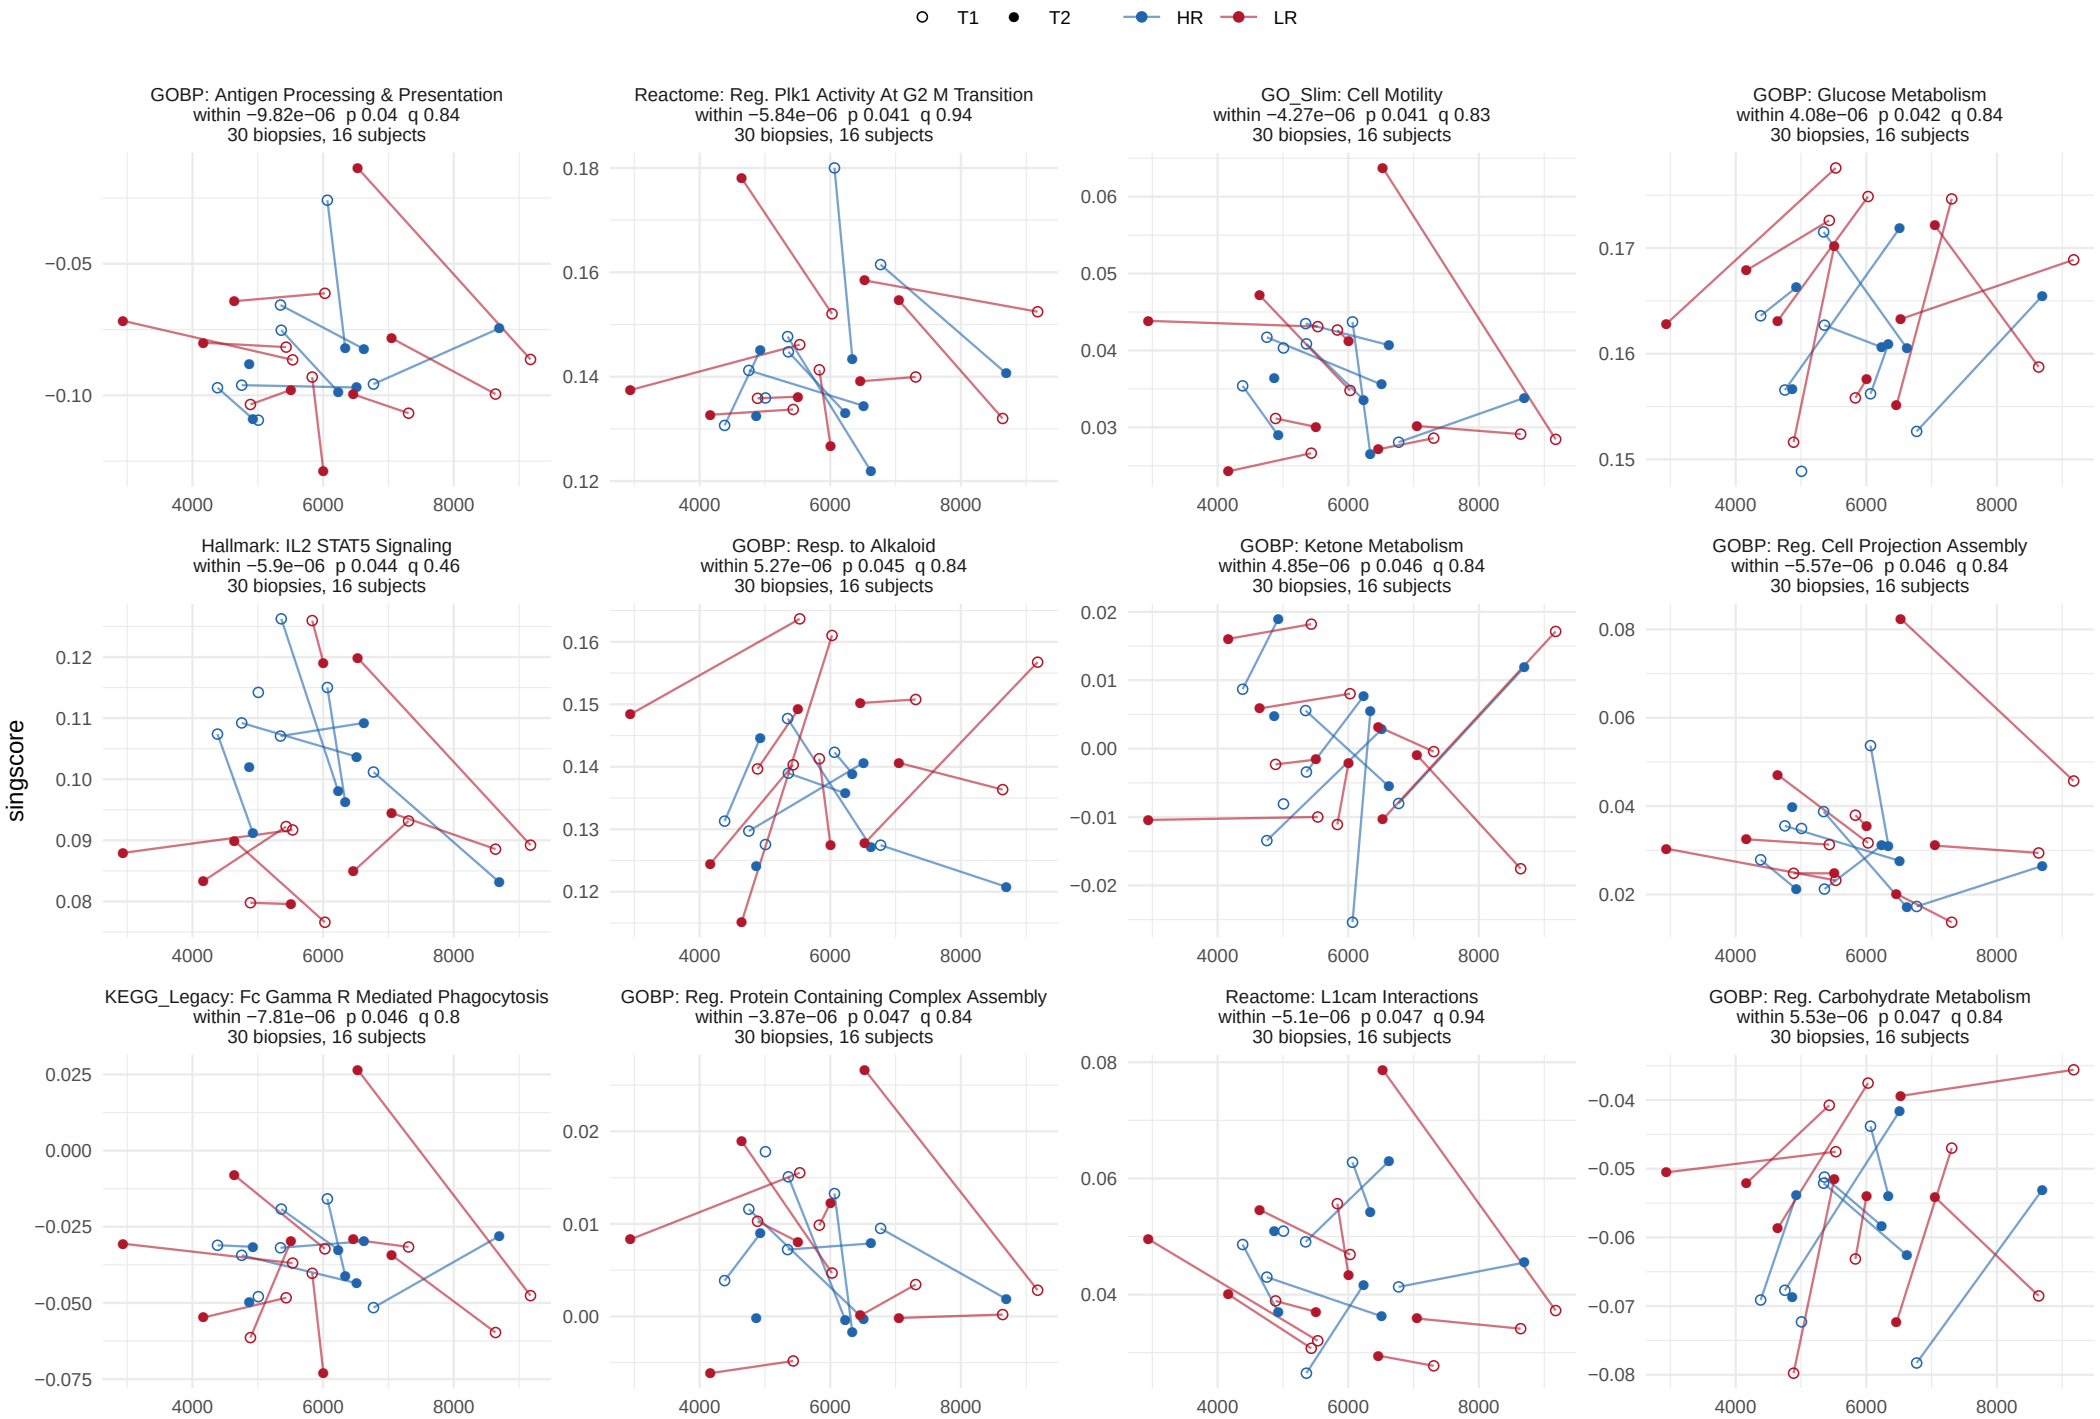

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/05_associate.xlsx, model.

fcsa_type1, within−person term


62 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 6 of 6.

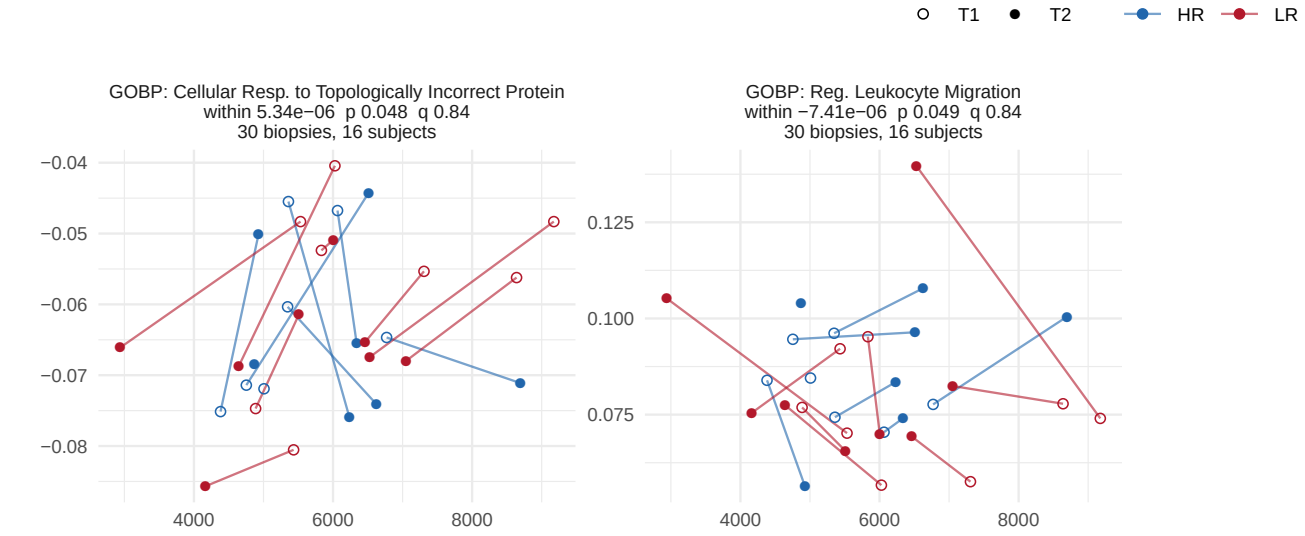

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/05_associate.xlsx, model.

fcsa_type1, between−person term


111 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 1 of 10.

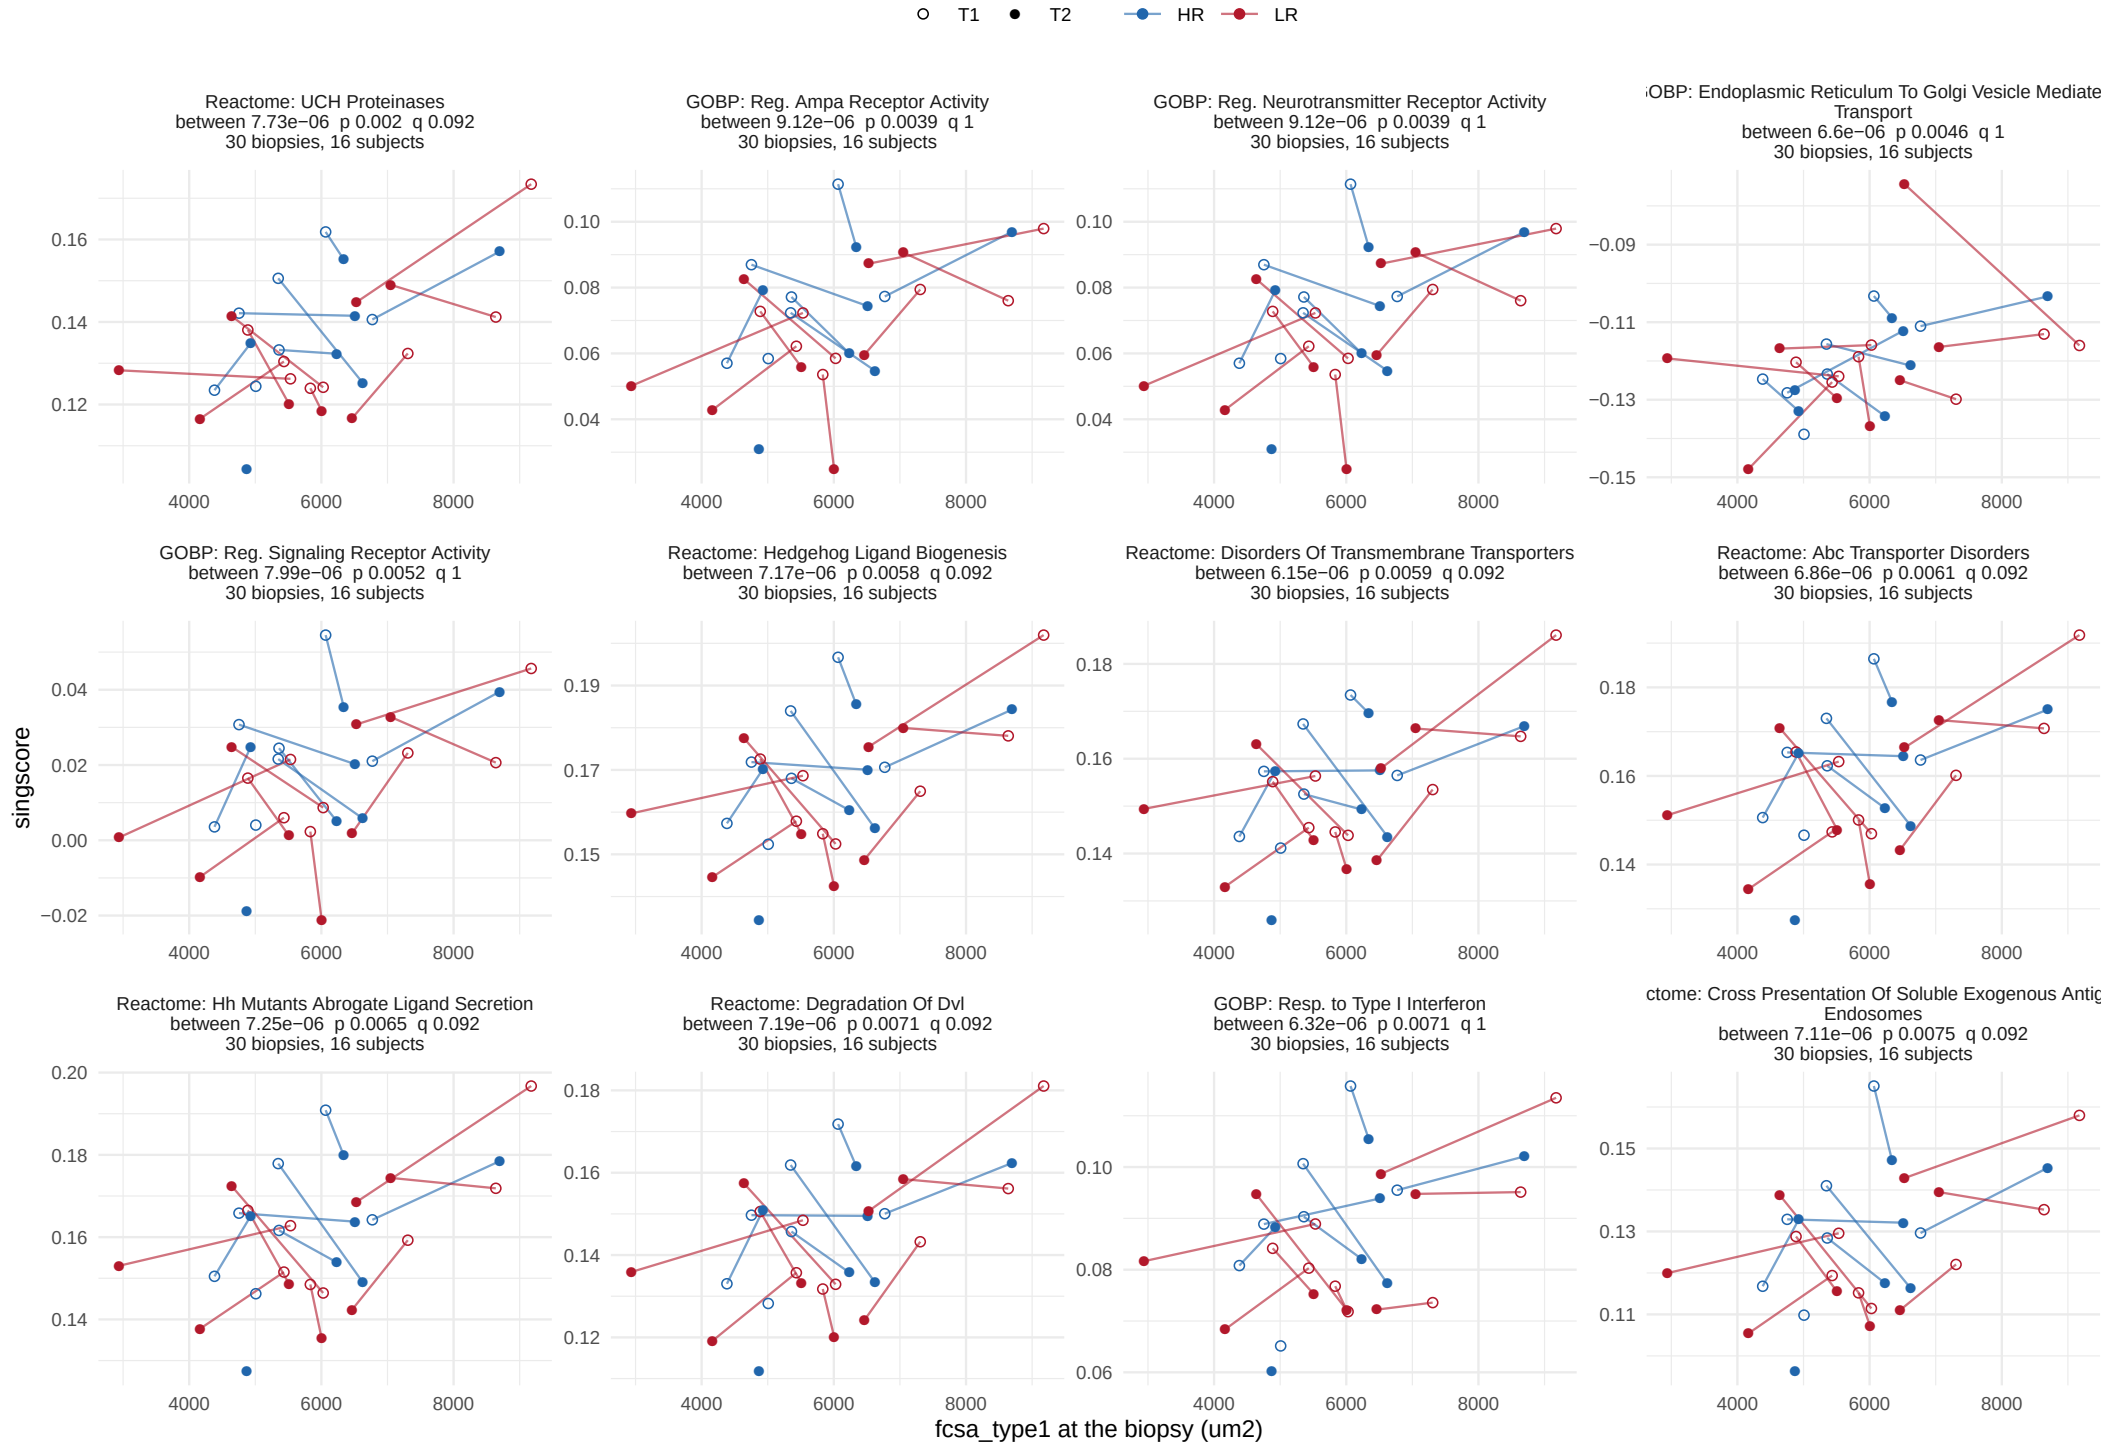

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/05_associate.xlsx, model.

fcsa_type1, between−person term


111 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 2 of 10.

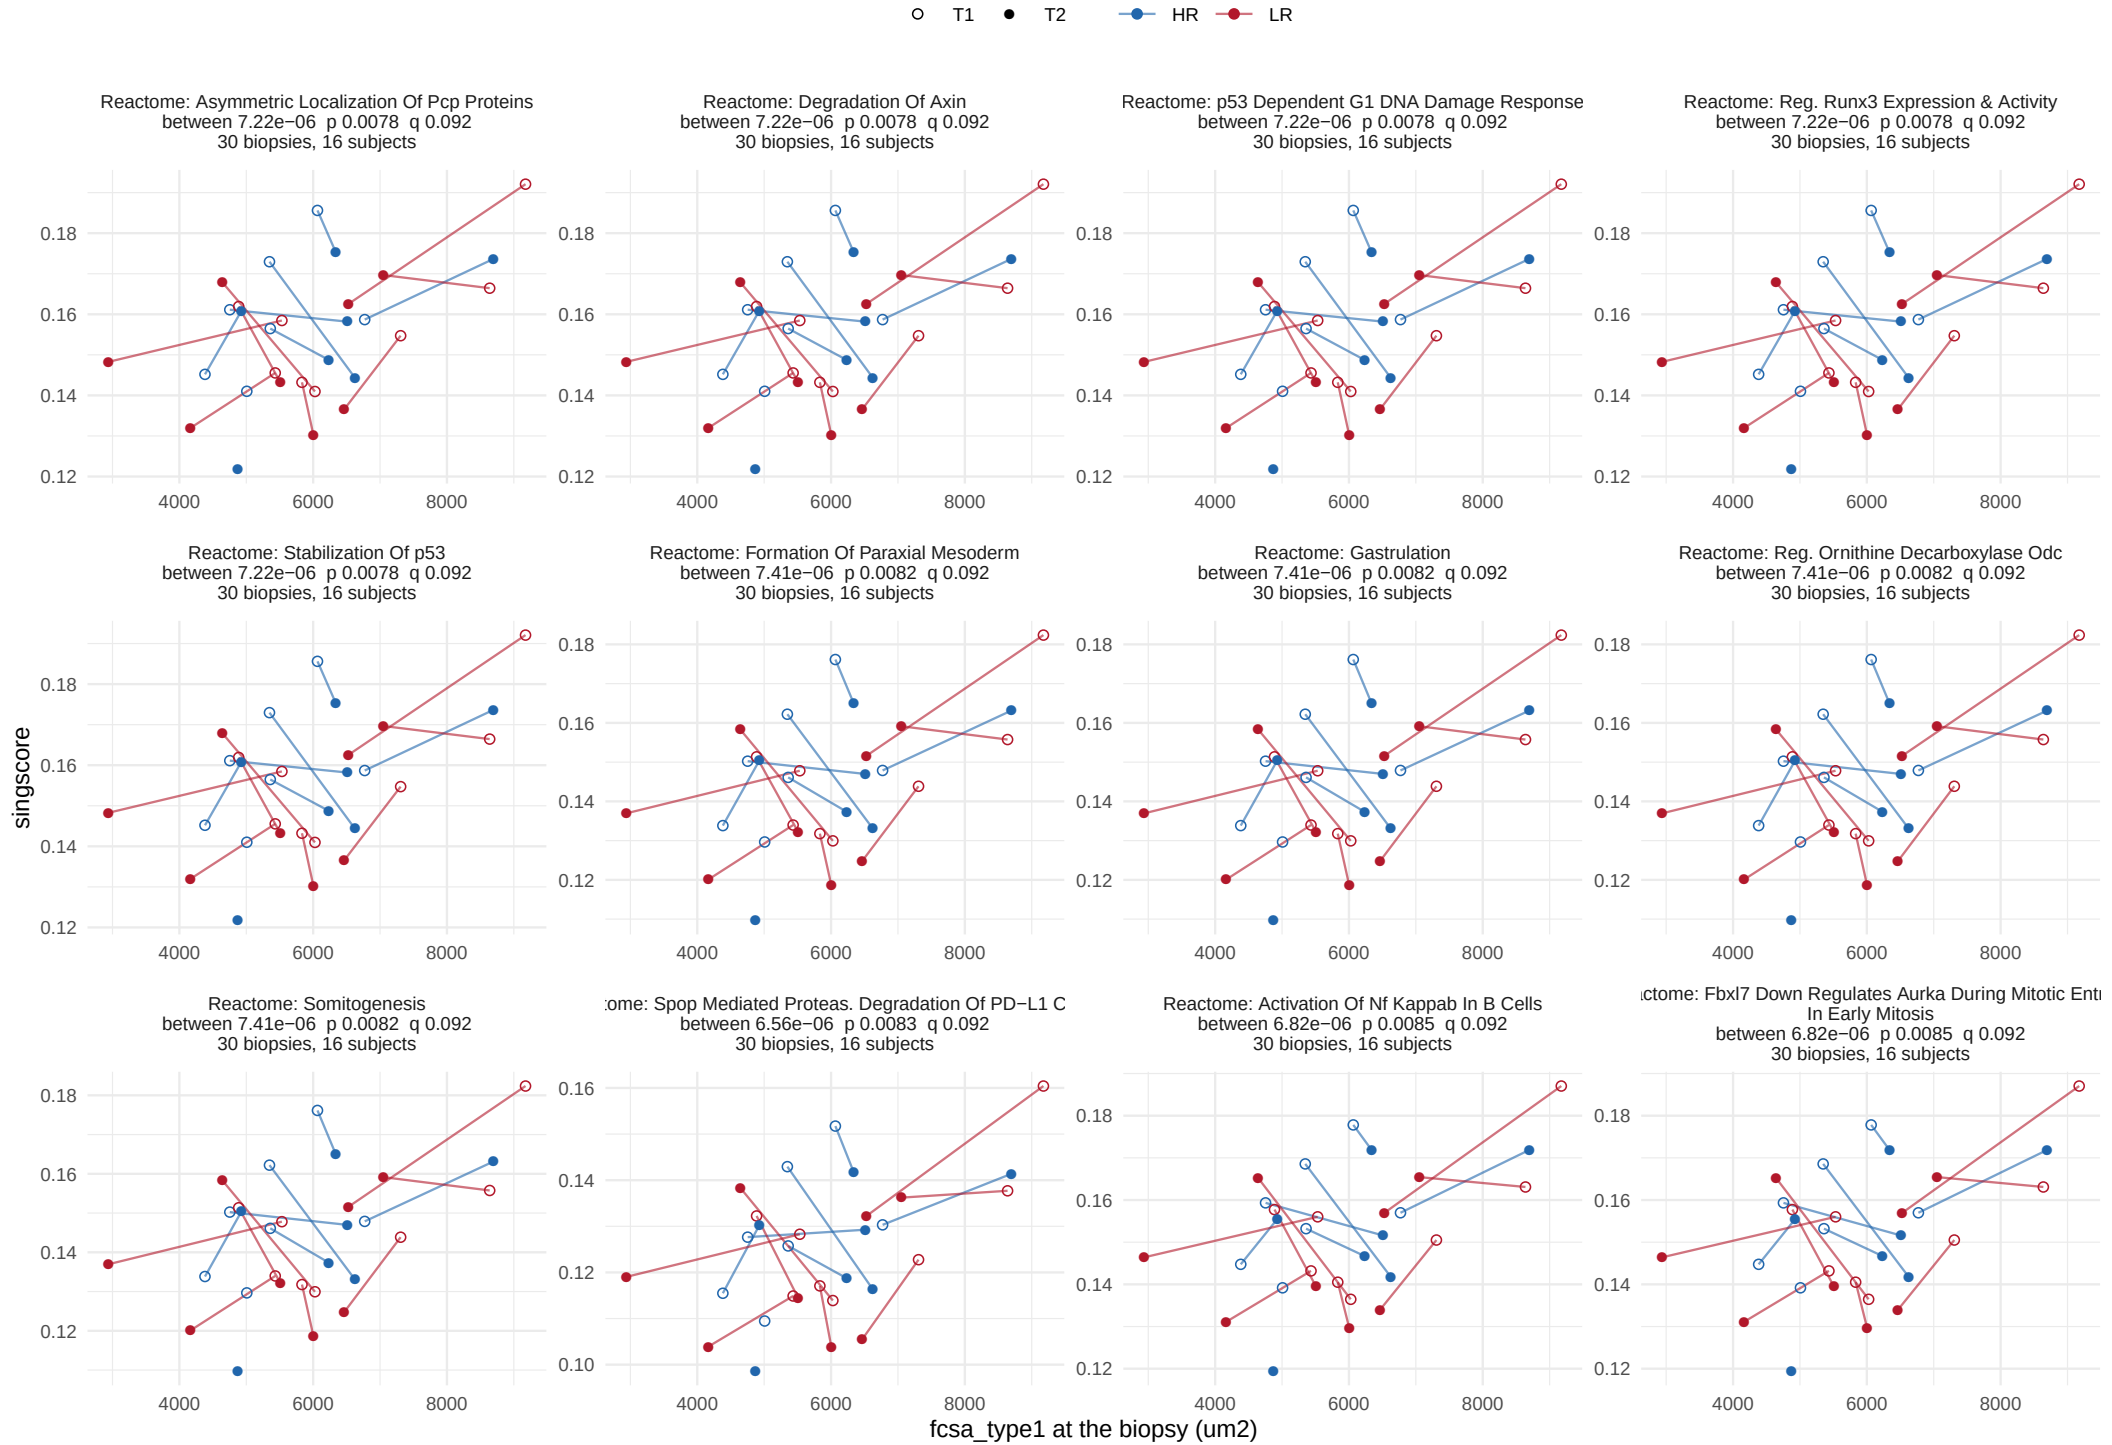

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/05_associate.xlsx, model.

fcsa_type1, between−person term


111 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 3 of 10.

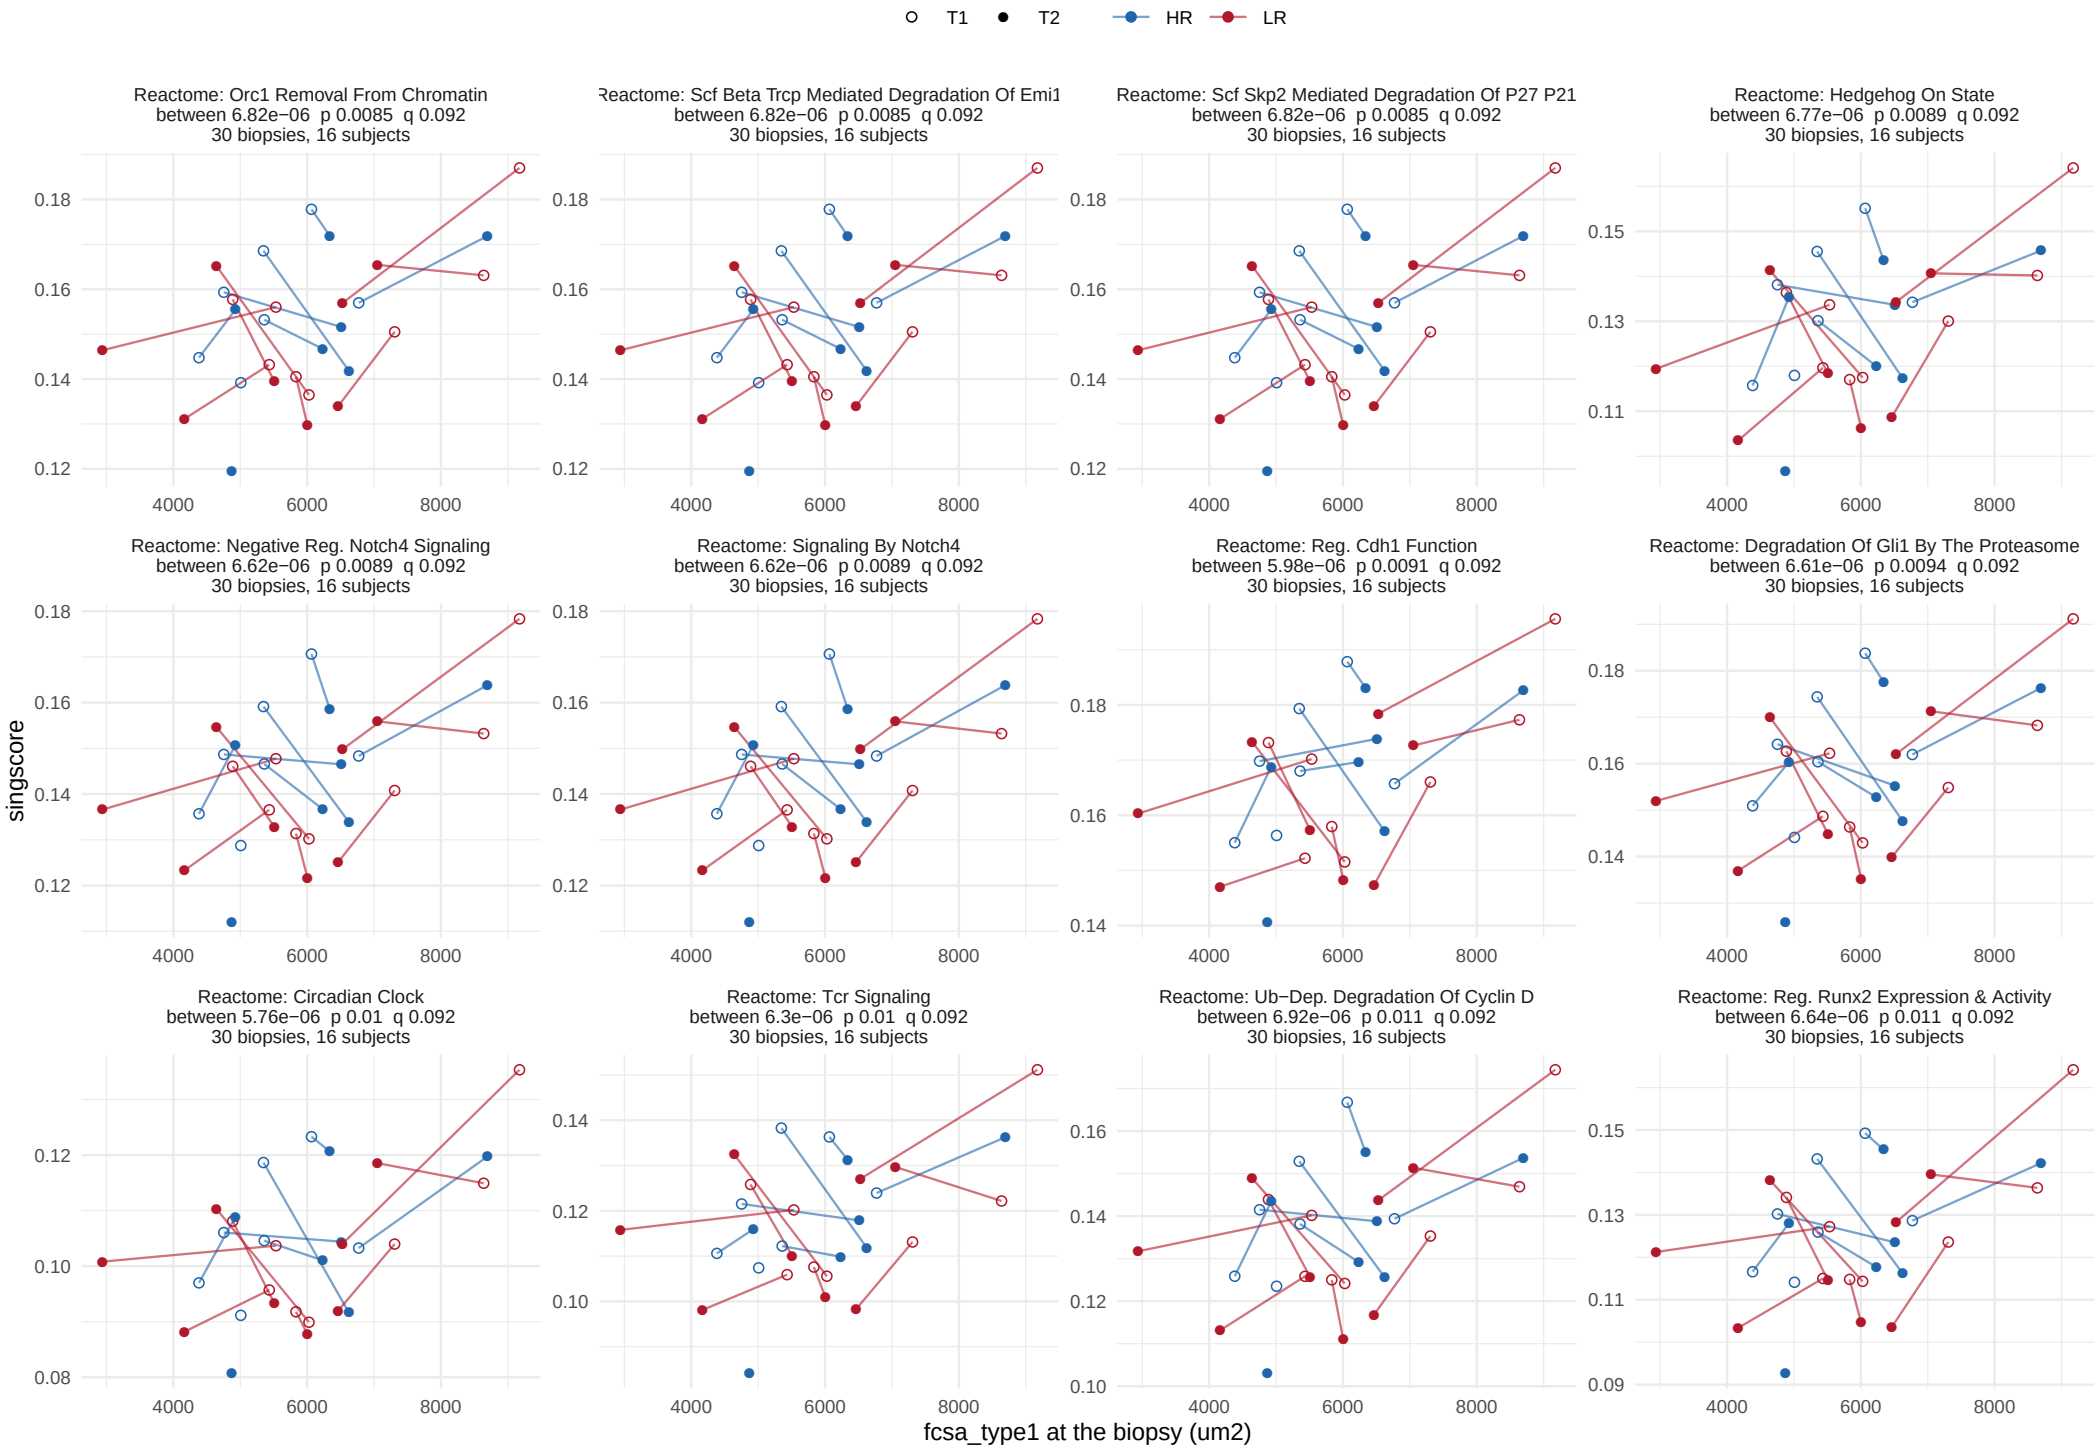

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/05_associate.xlsx, model.

fcsa_type1, between−person term


111 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 4 of 10.

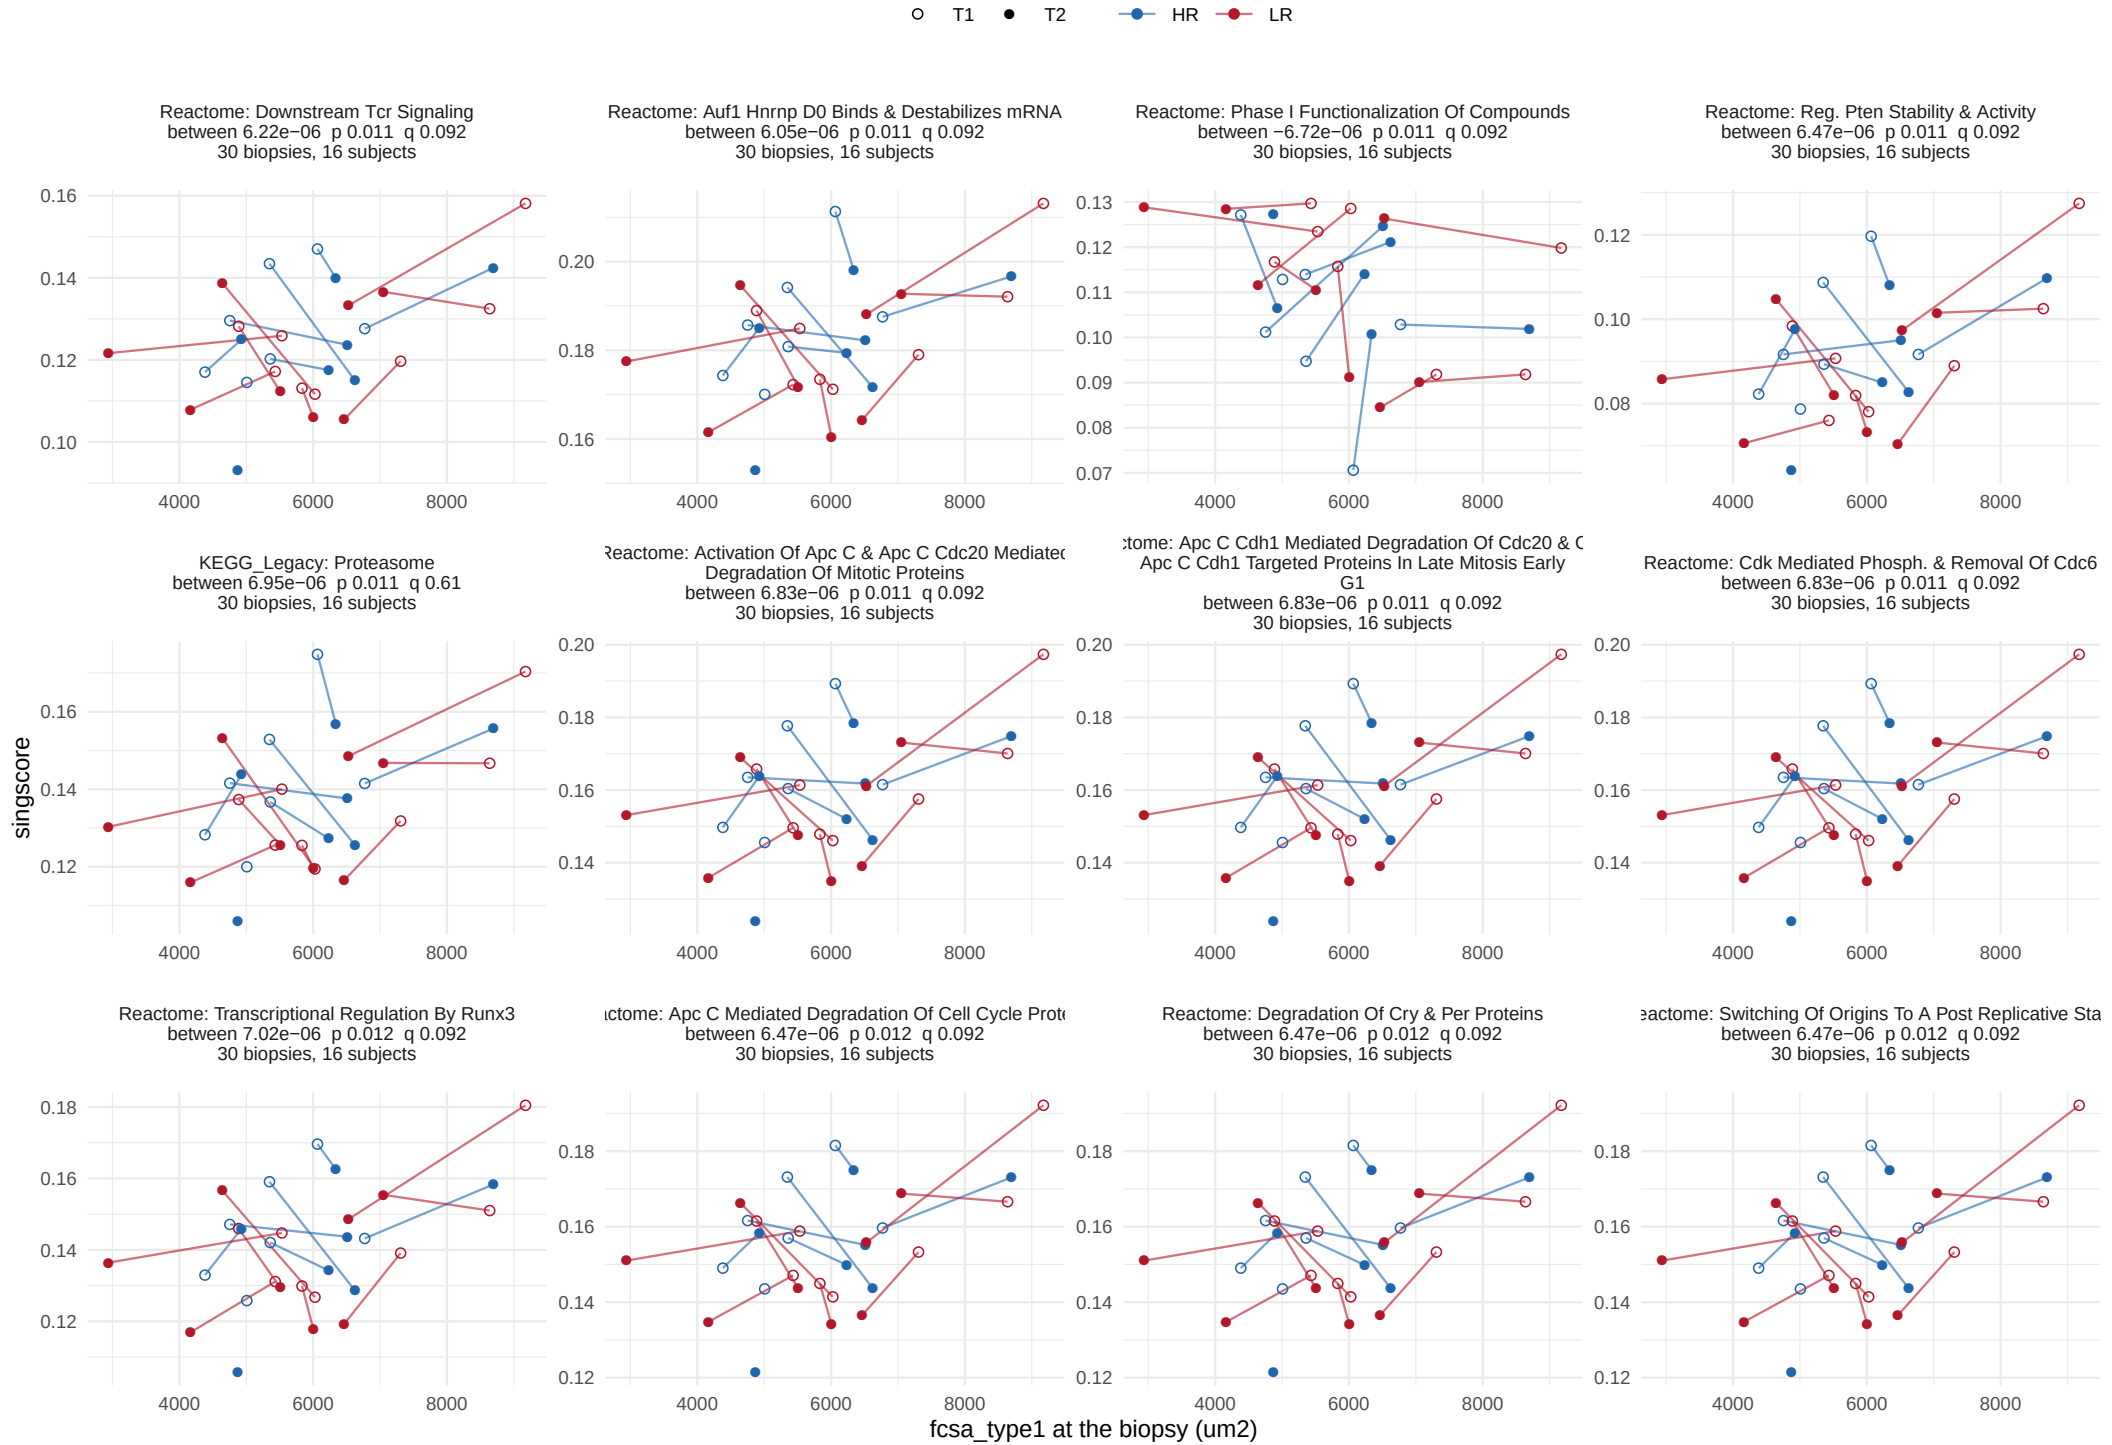

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/05_associate.xlsx, model.

fcsa_type1, between−person term


111 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 5 of 10.

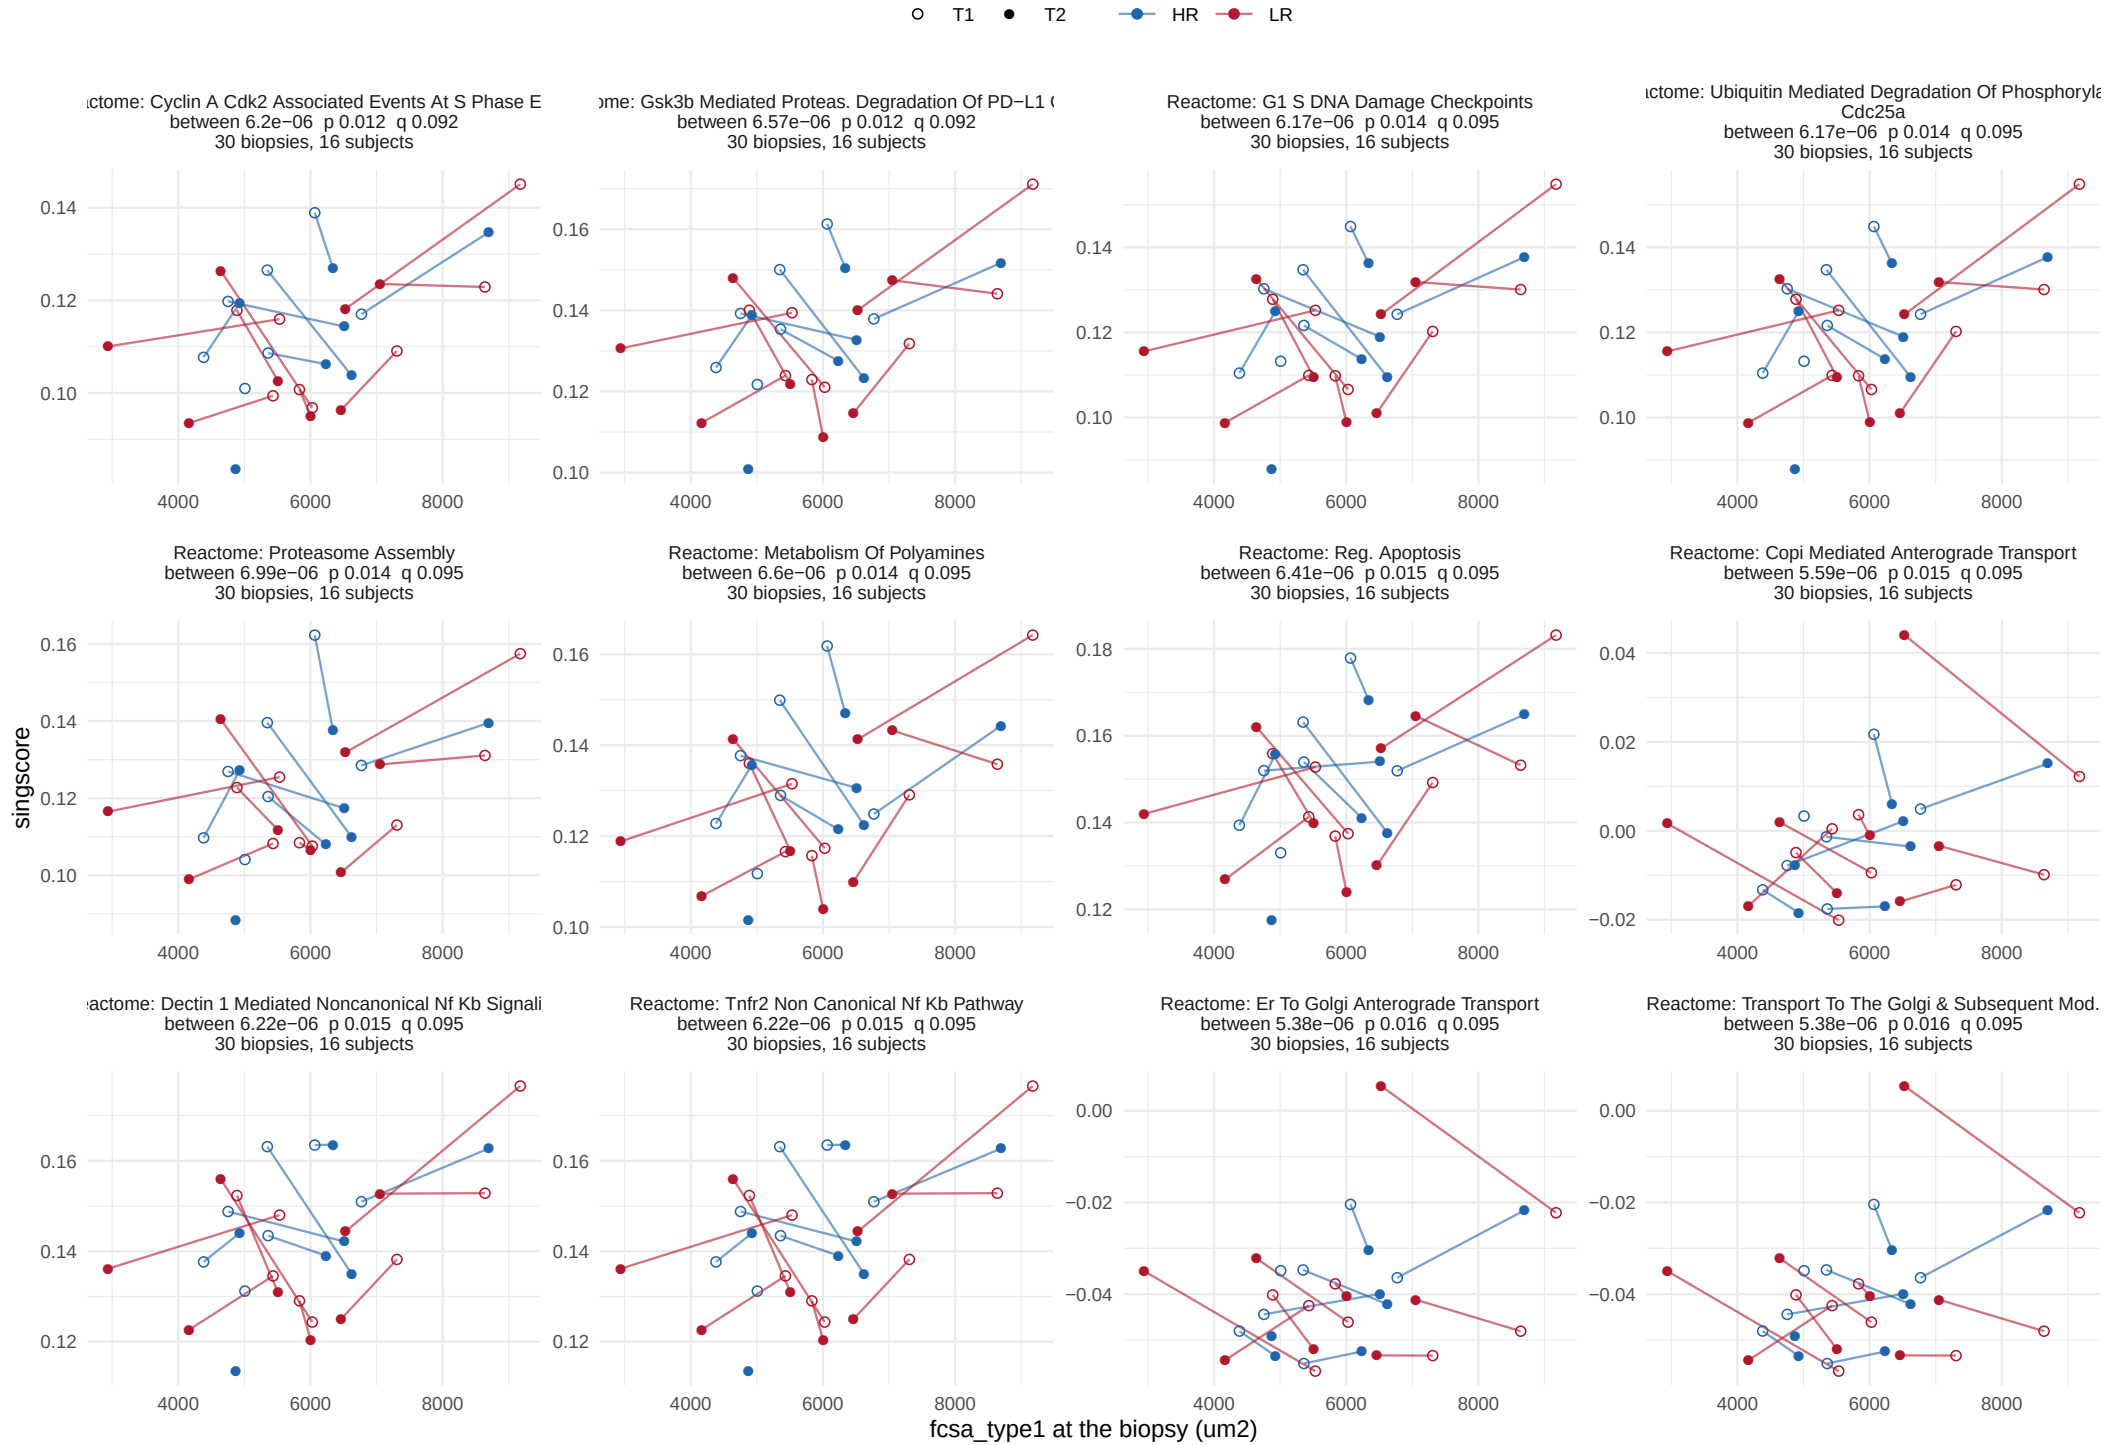

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/05_associate.xlsx, model.

fcsa_type1, between−person term


111 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 6 of 10.

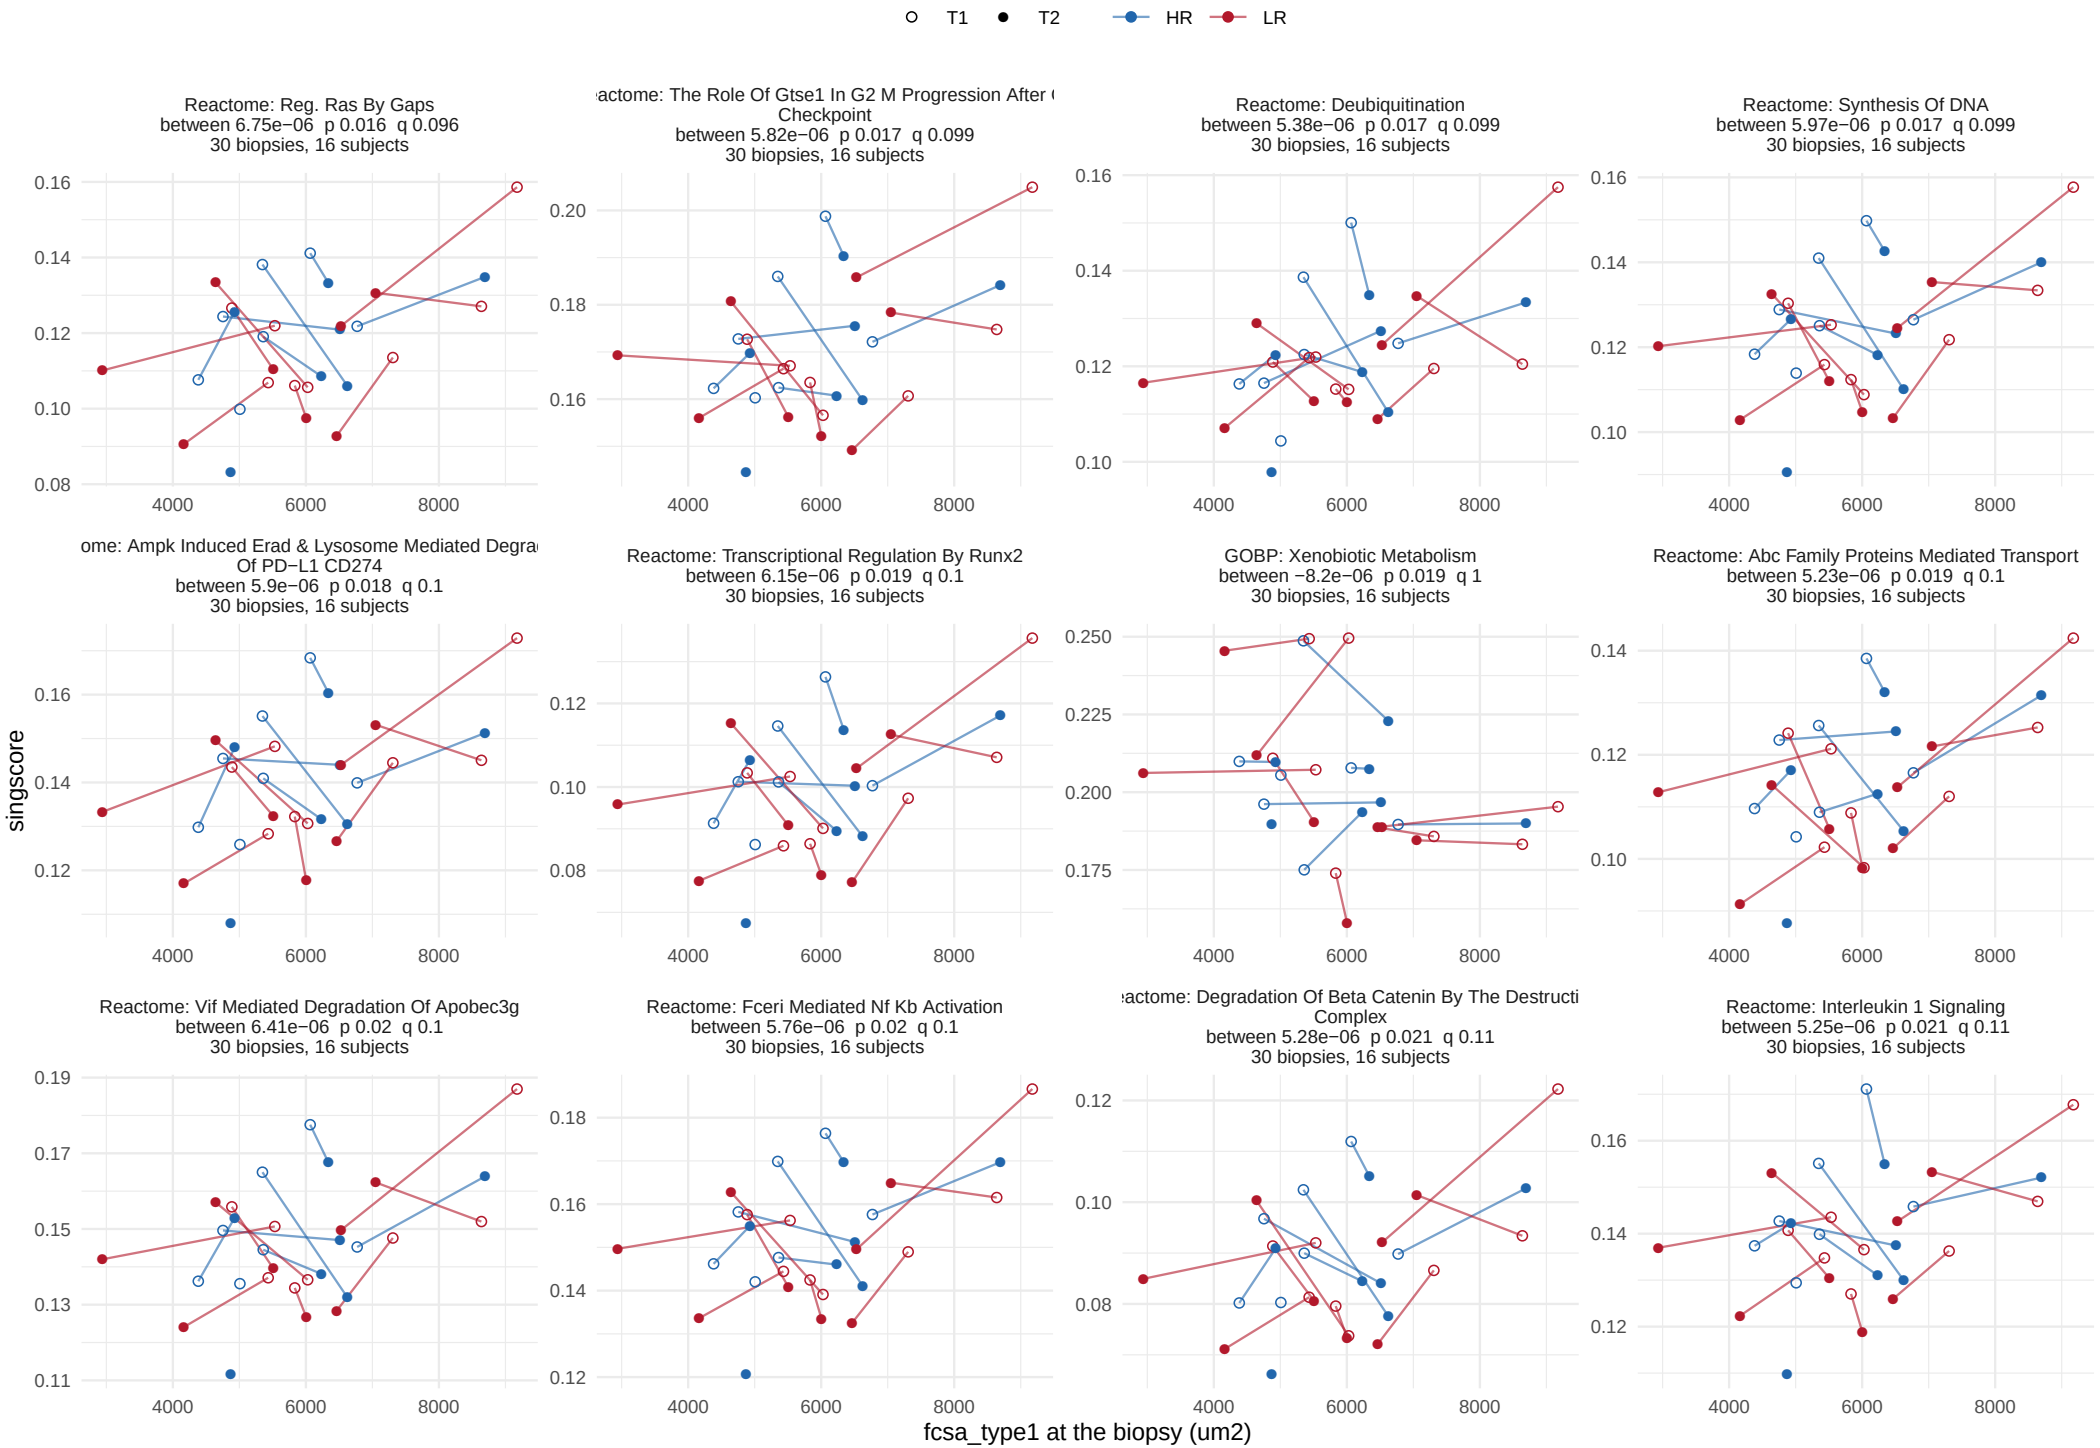

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/05_associate.xlsx, model.

fcsa_type1, between−person term


111 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 7 of 10.

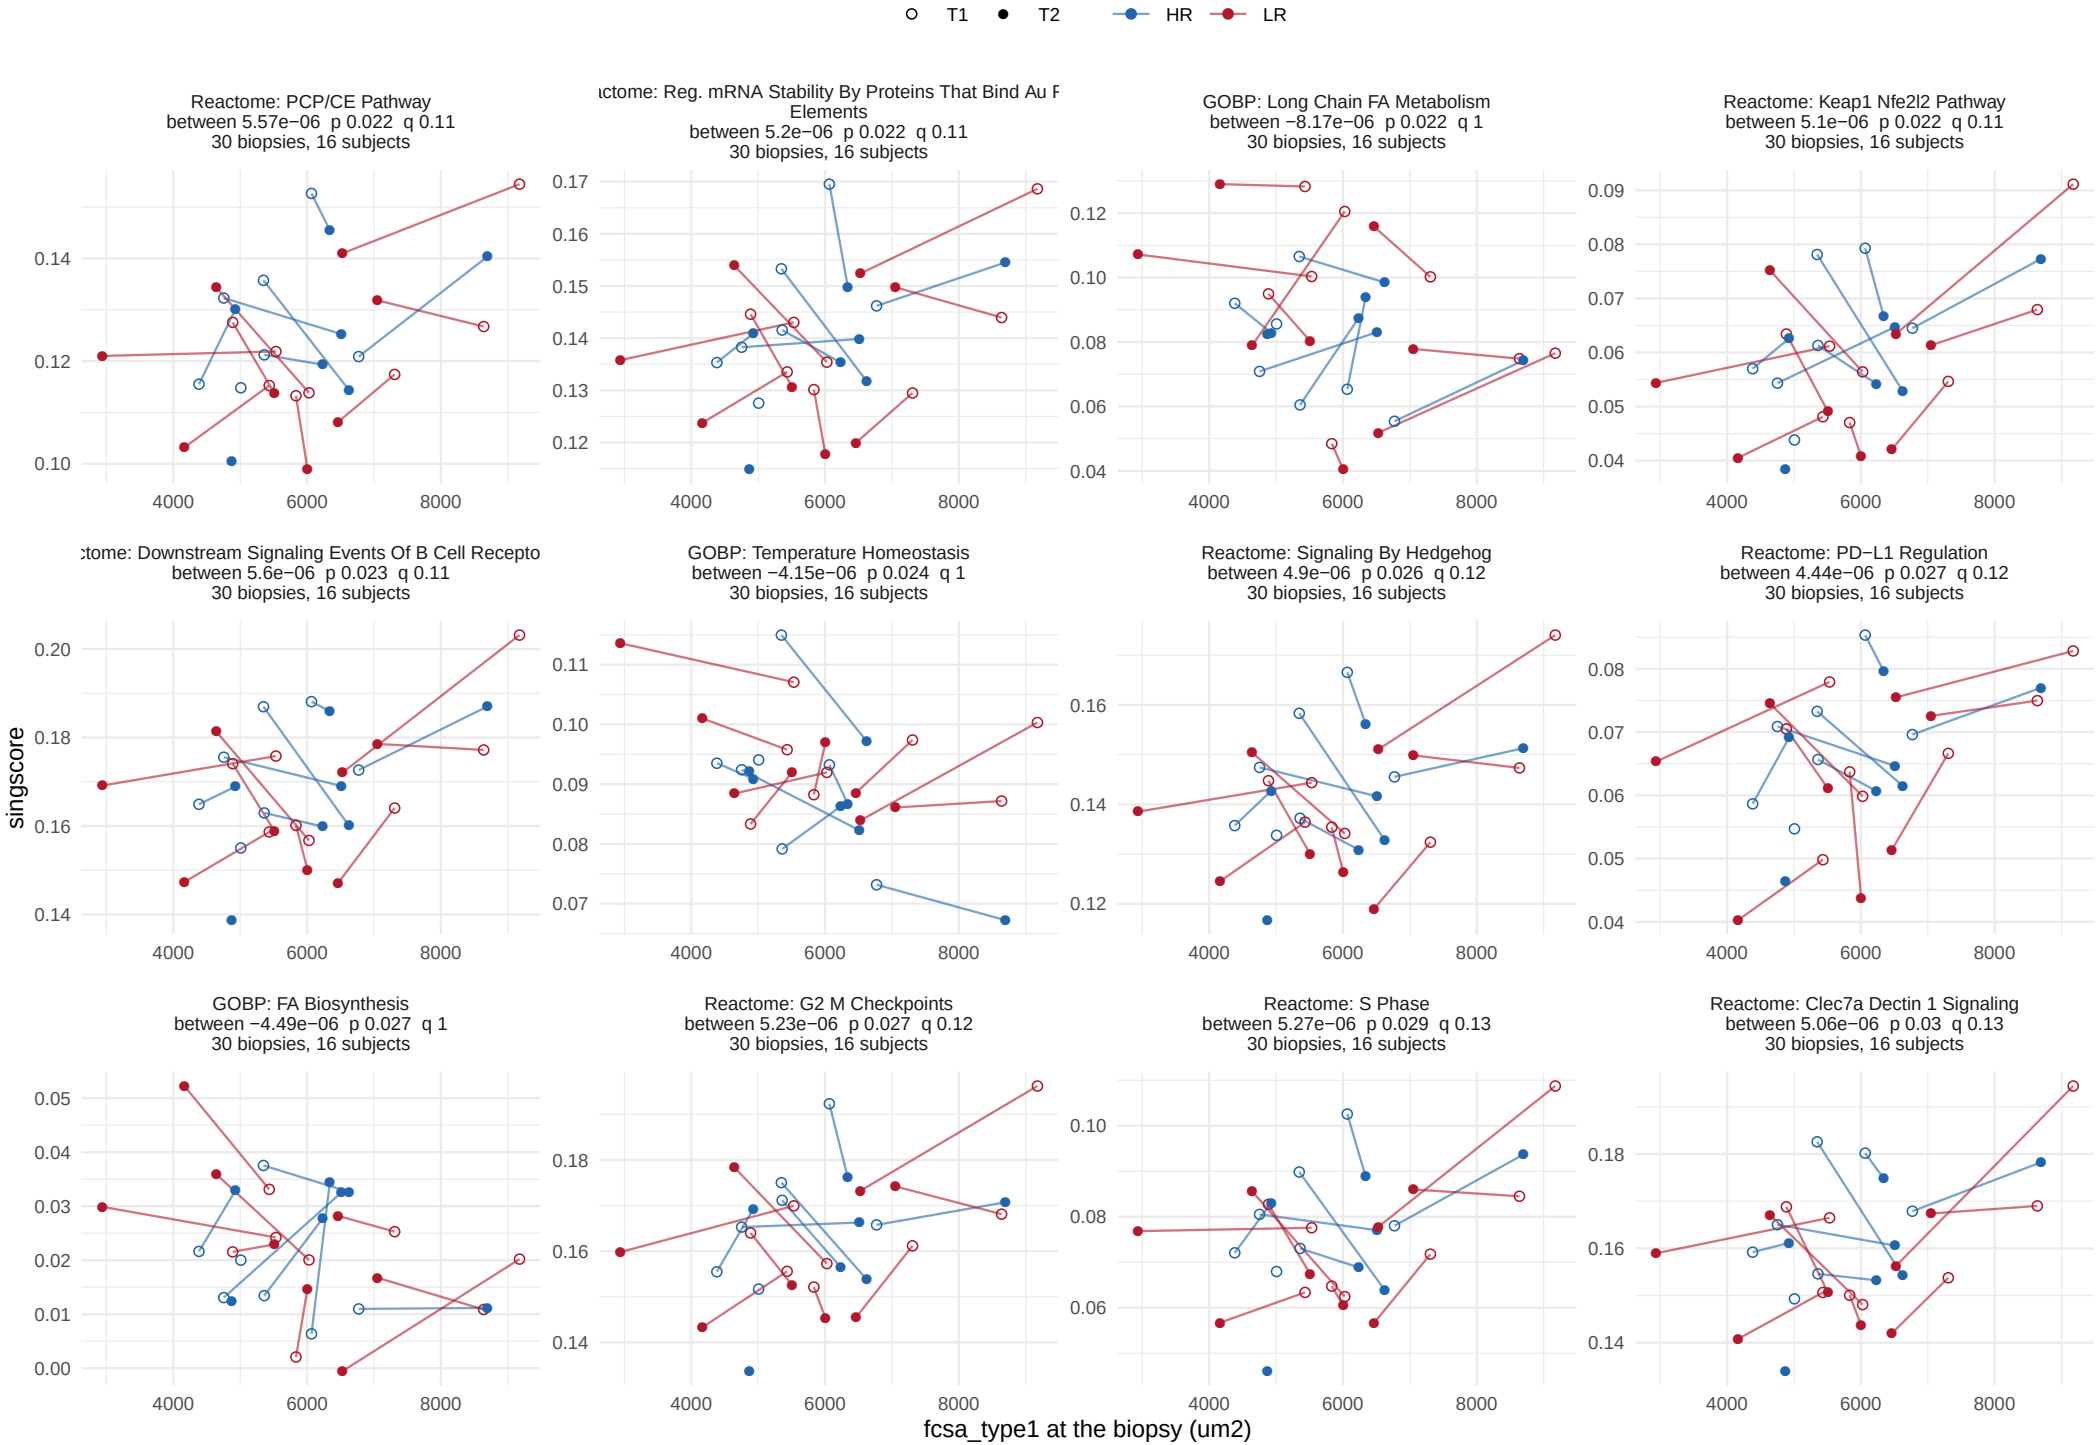

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/05_associate.xlsx, model.

fcsa_type1, between−person term


111 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 8 of 10.

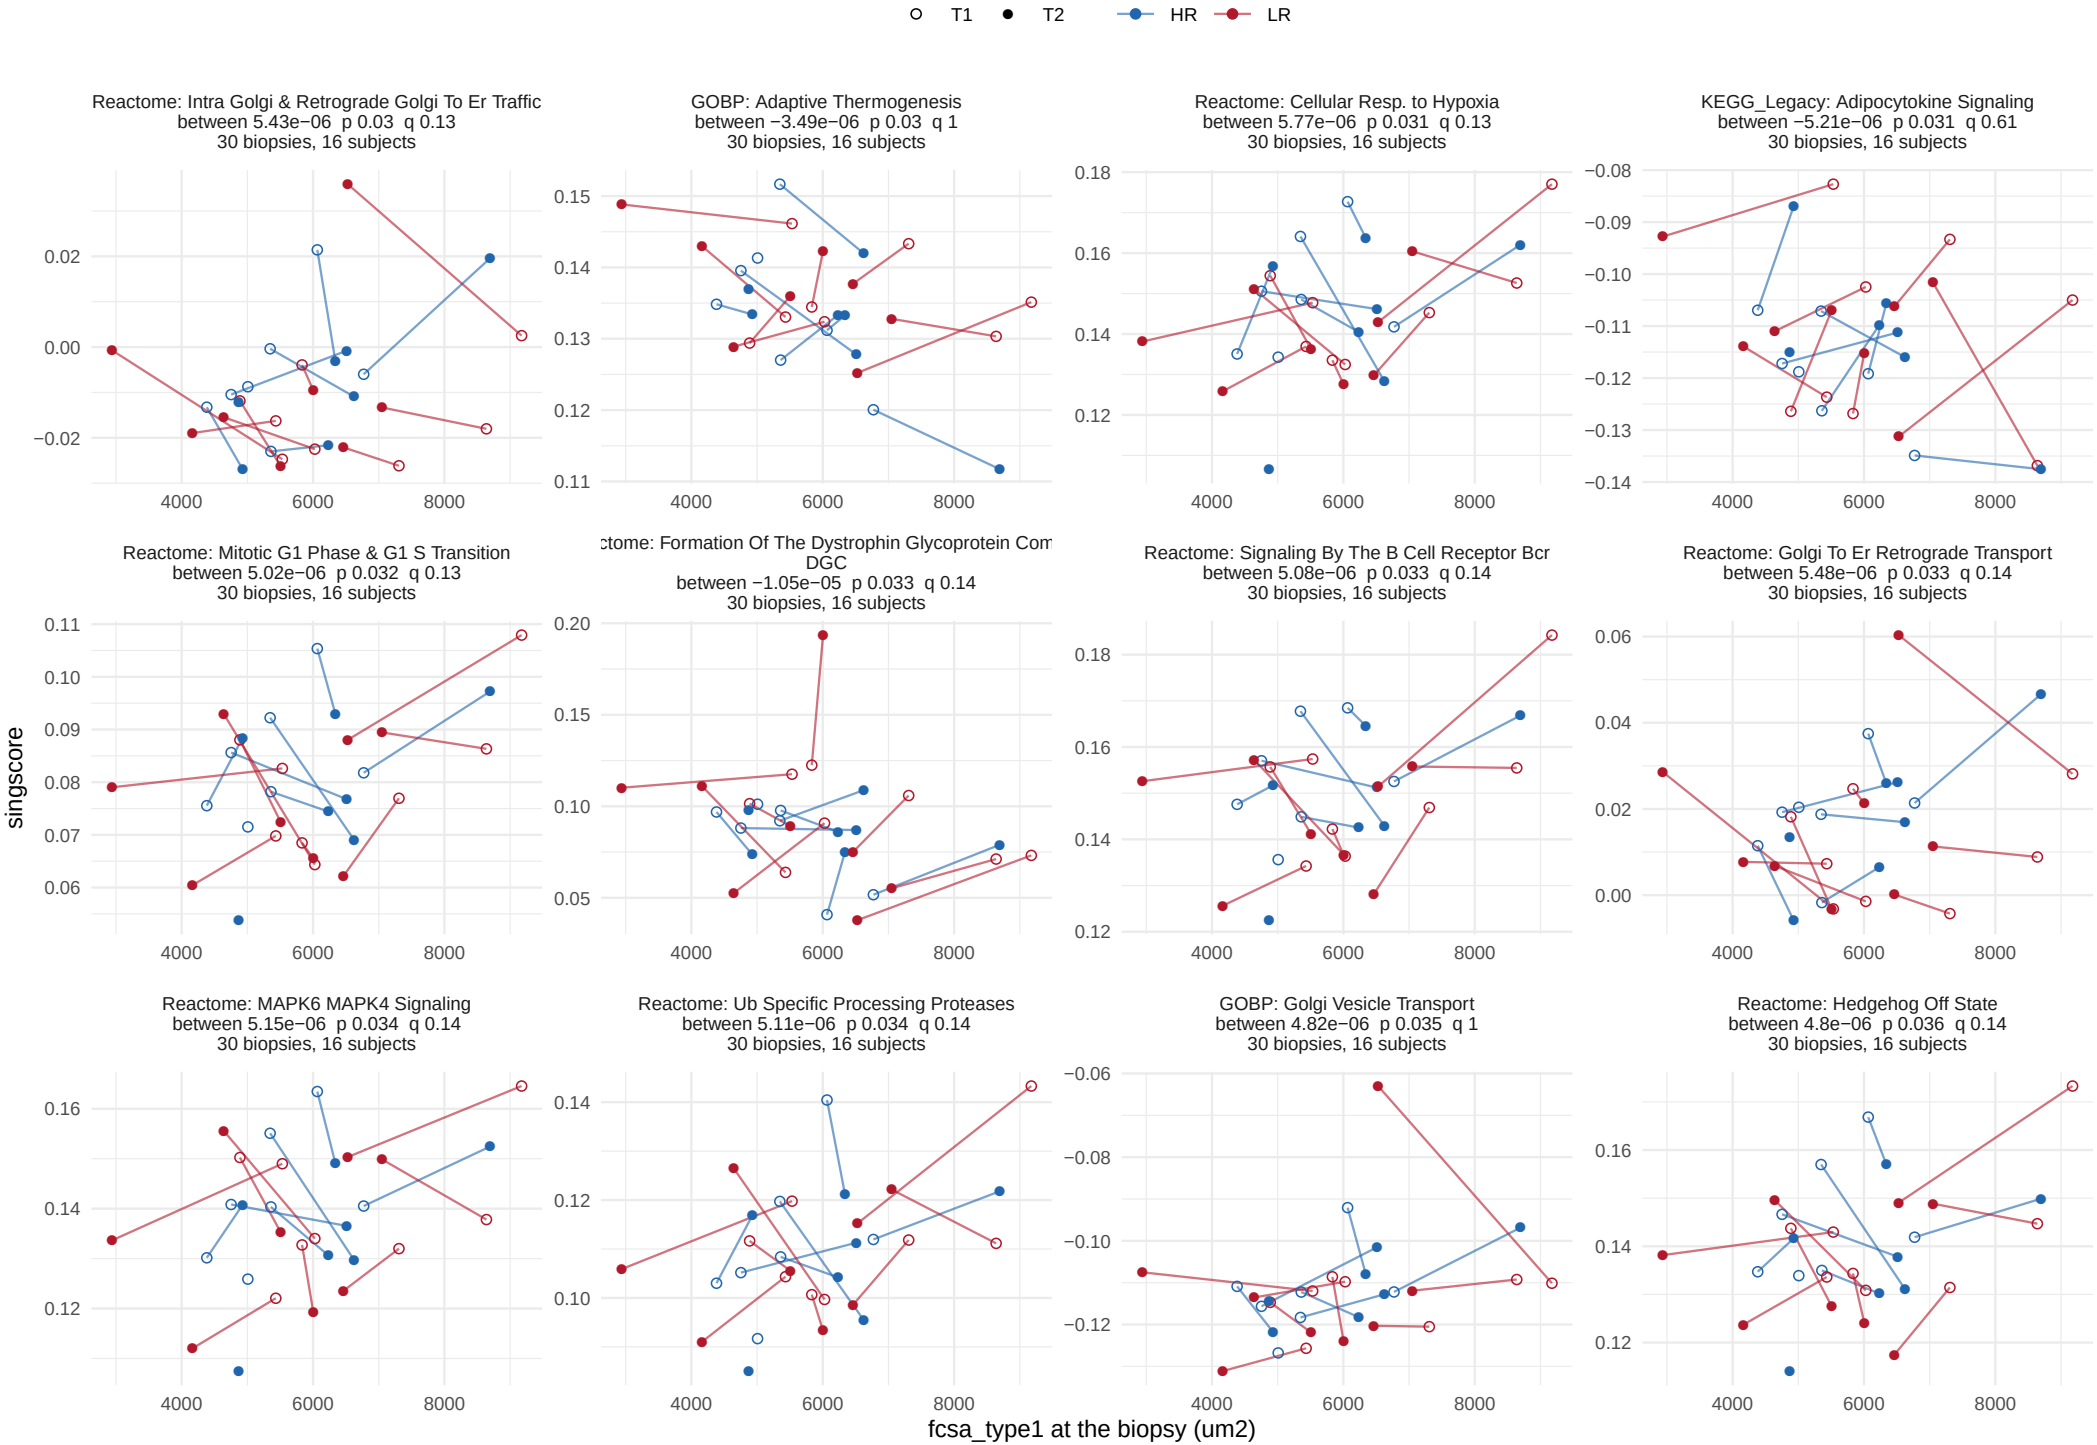

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/05_associate.xlsx, model.

fcsa_type1, between−person term


111 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 9 of 10.

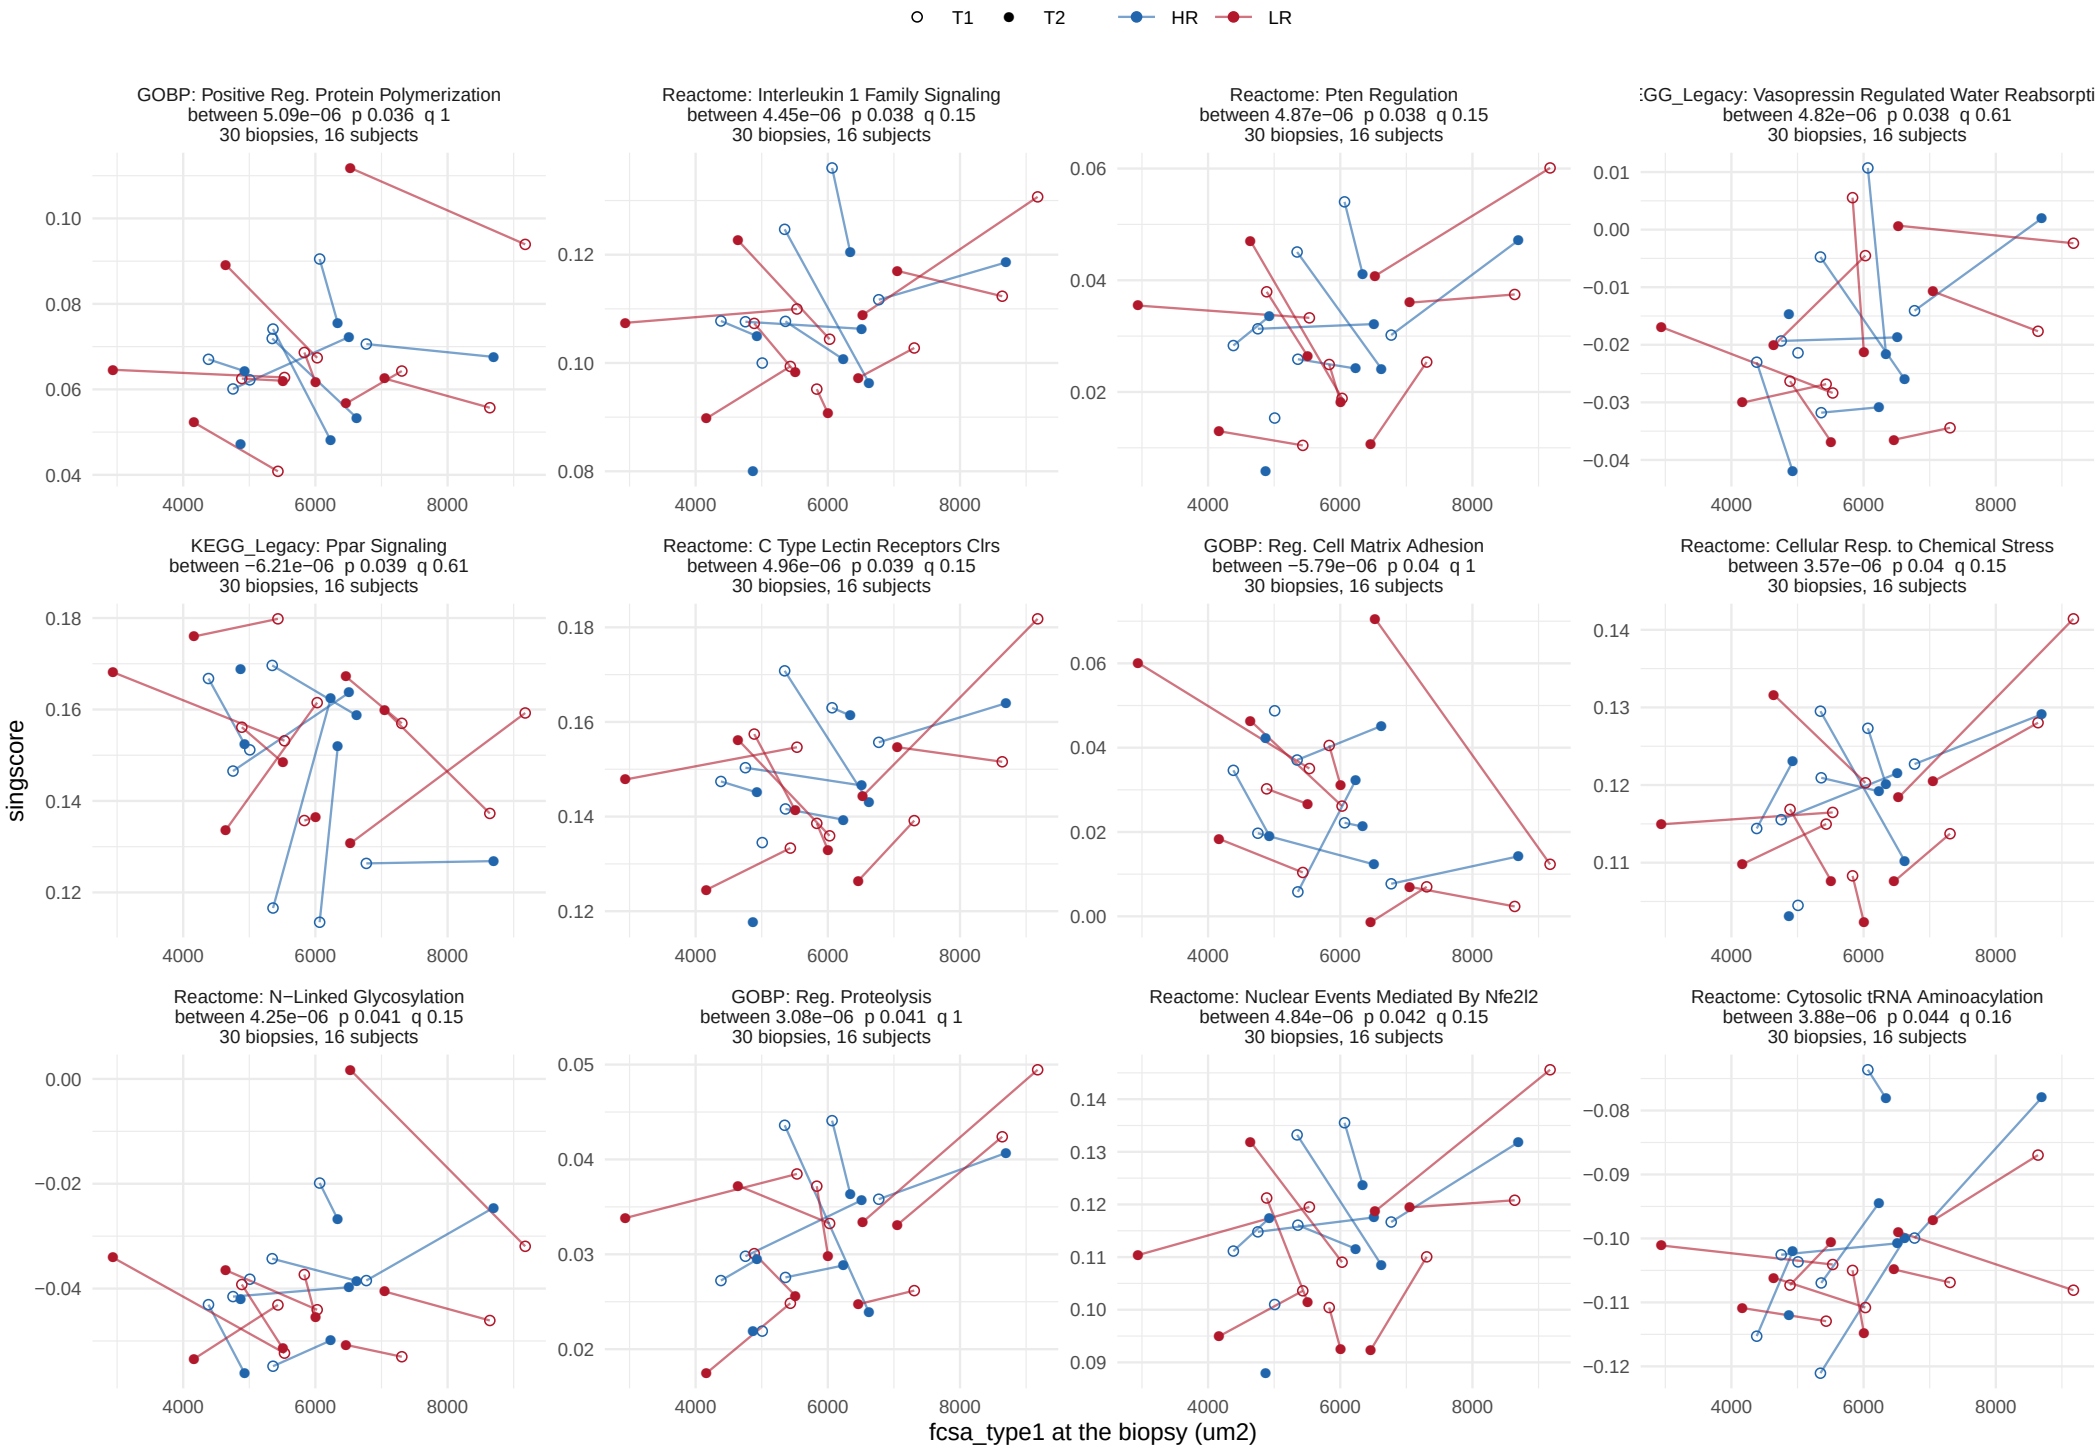

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/05_associate.xlsx, model.

fcsa_type1, between−person term

111 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 10 of 10.

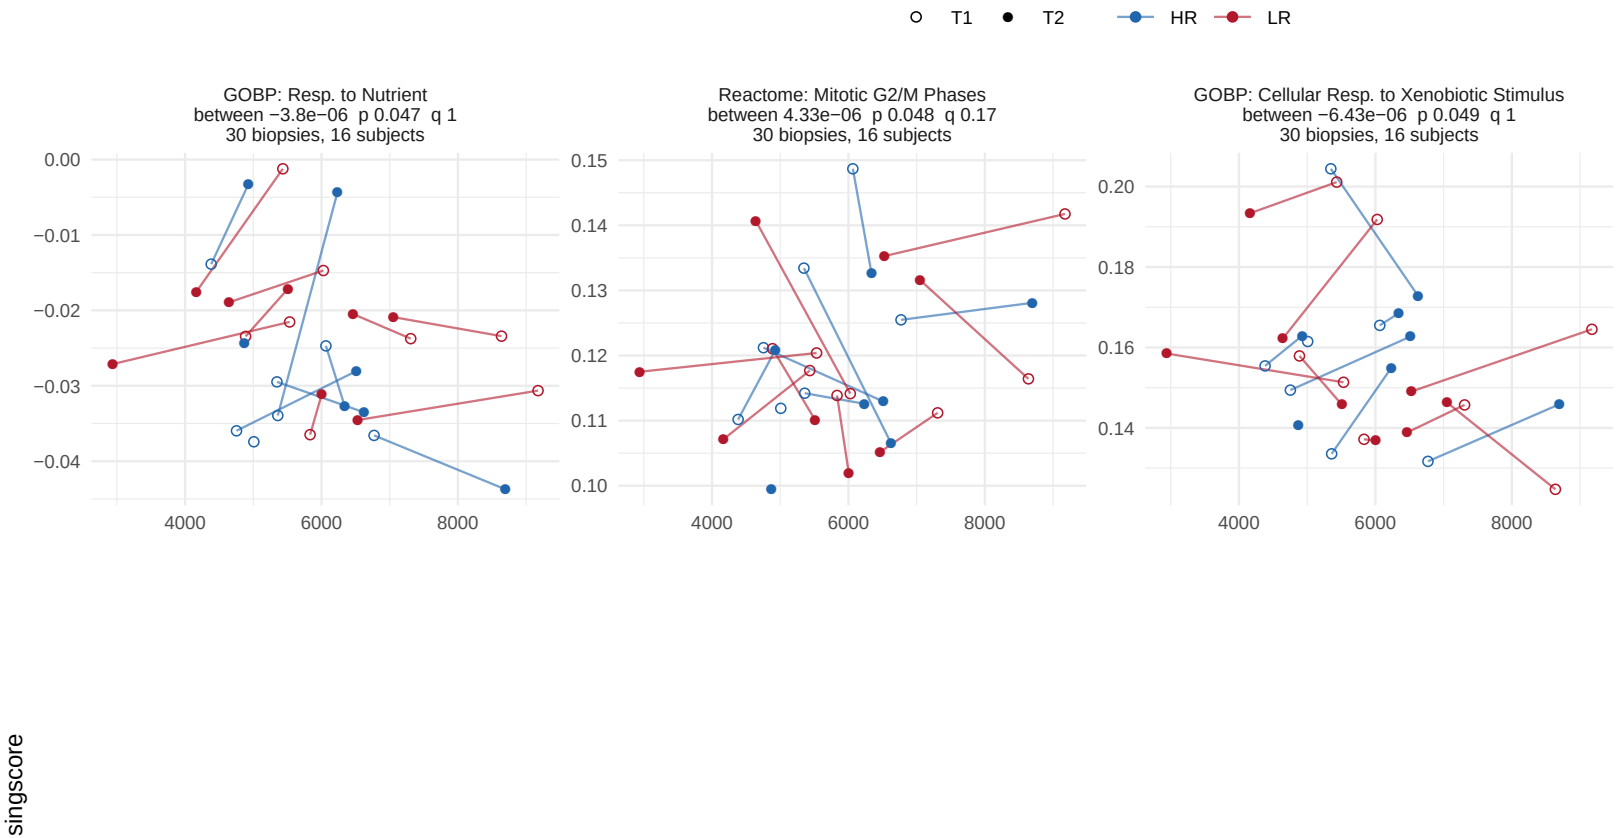

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/05_associate.xlsx, model.

fcsa_type2, within−person term


83 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 1 of 7.



limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/05_associate.xlsx, model.

fcsa_type2, within−person term


83 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 2 of 7.

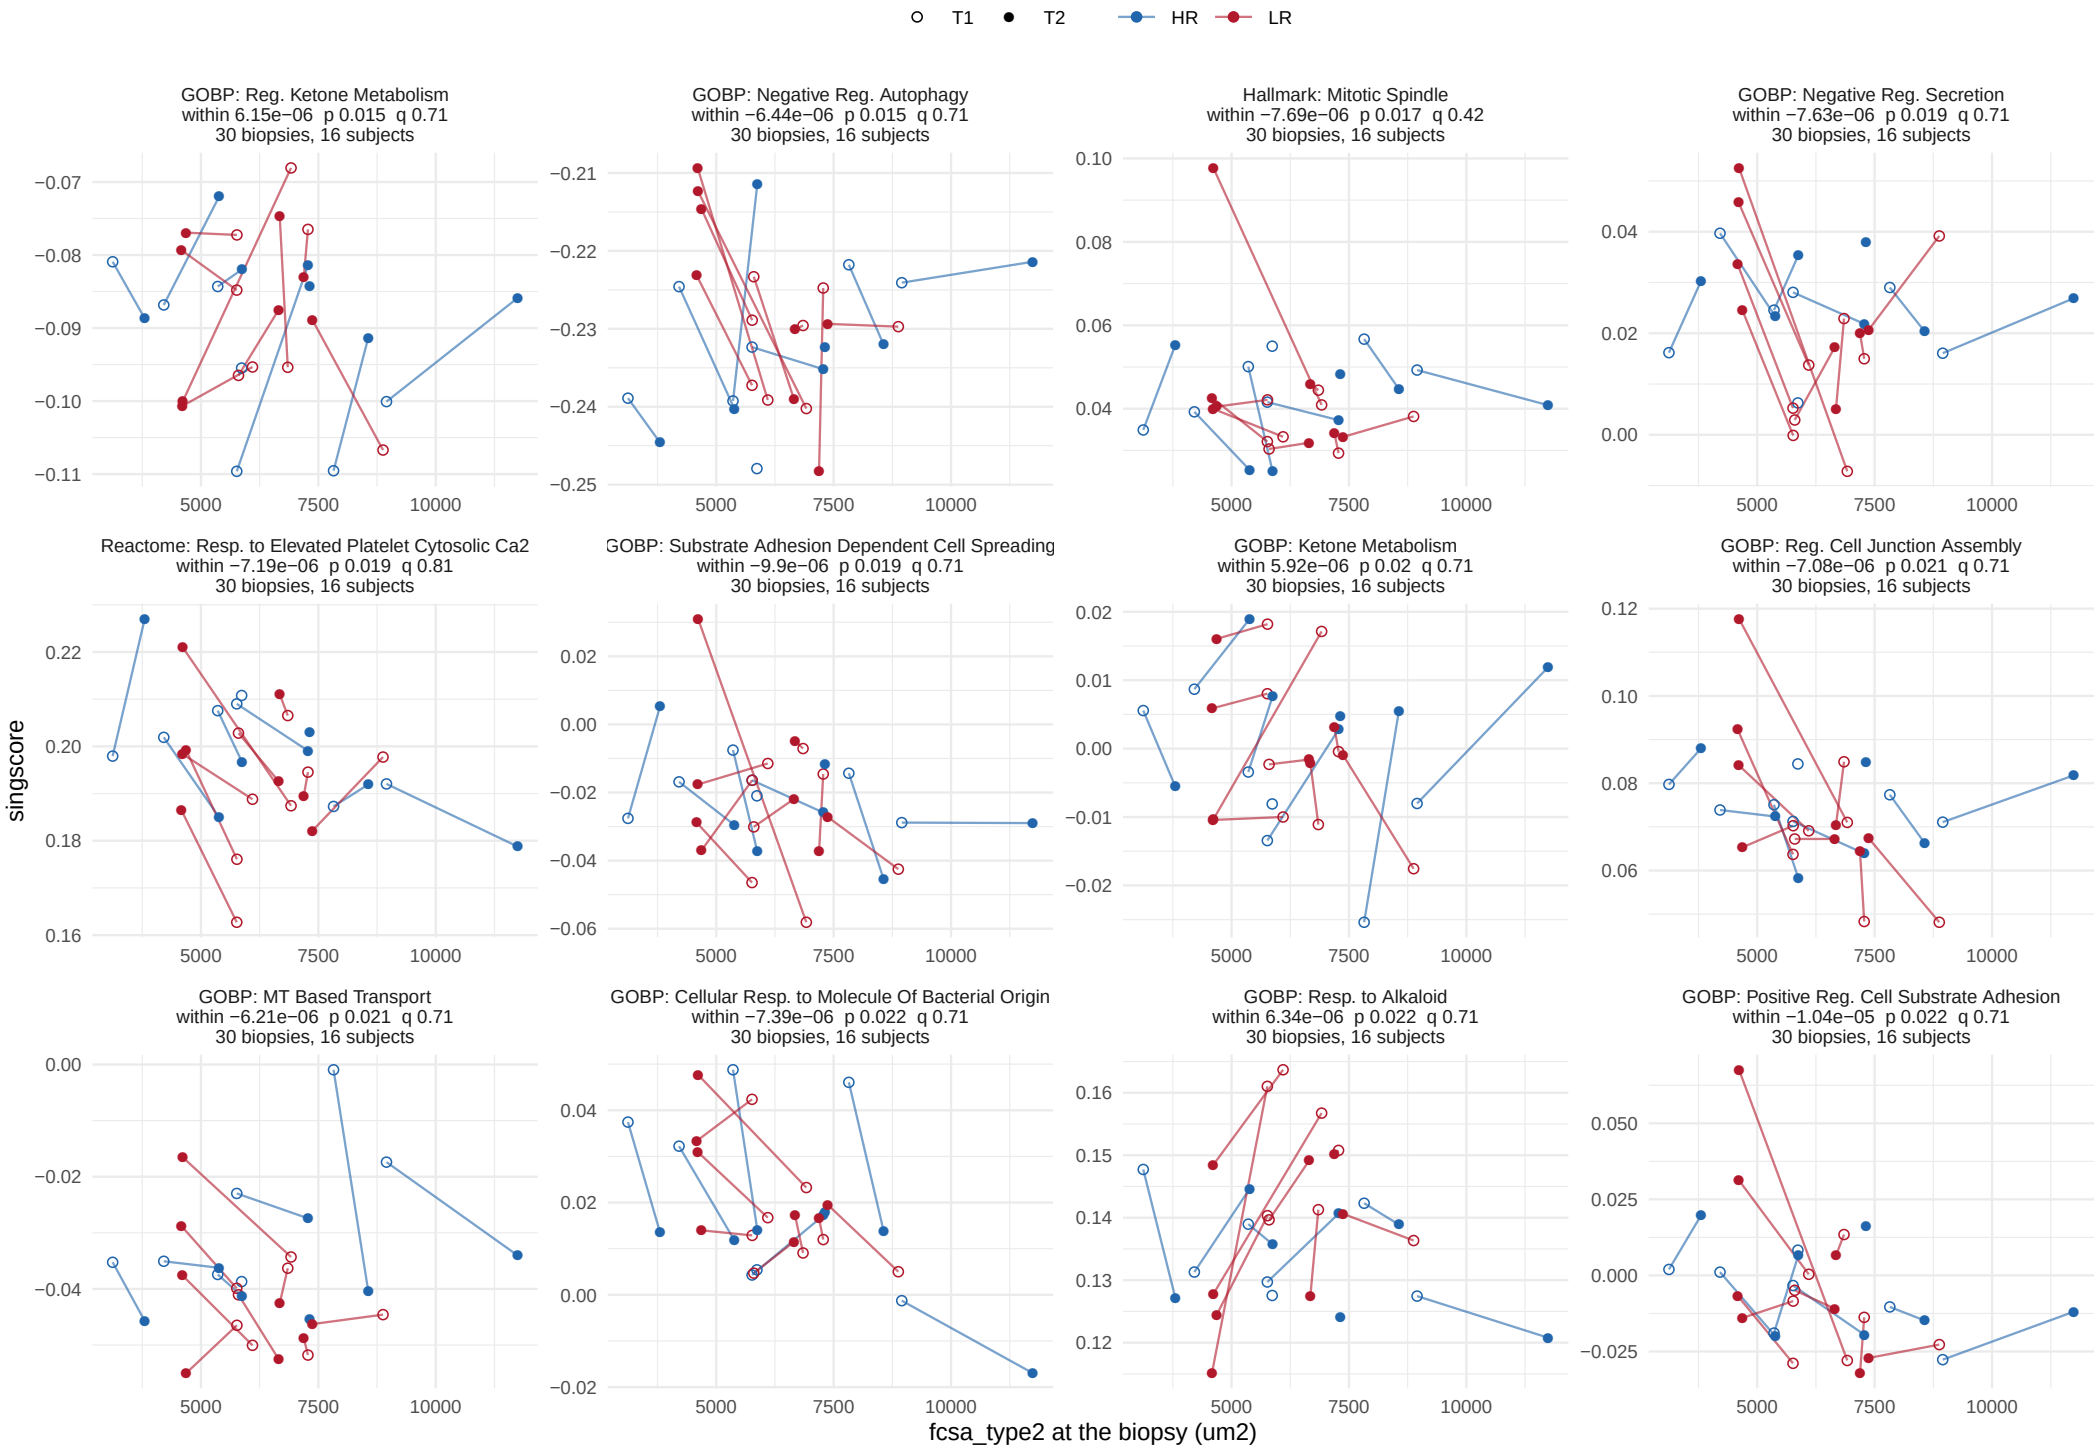

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/05_associate.xlsx, model.

fcsa_type2, within−person term


83 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 3 of 7.

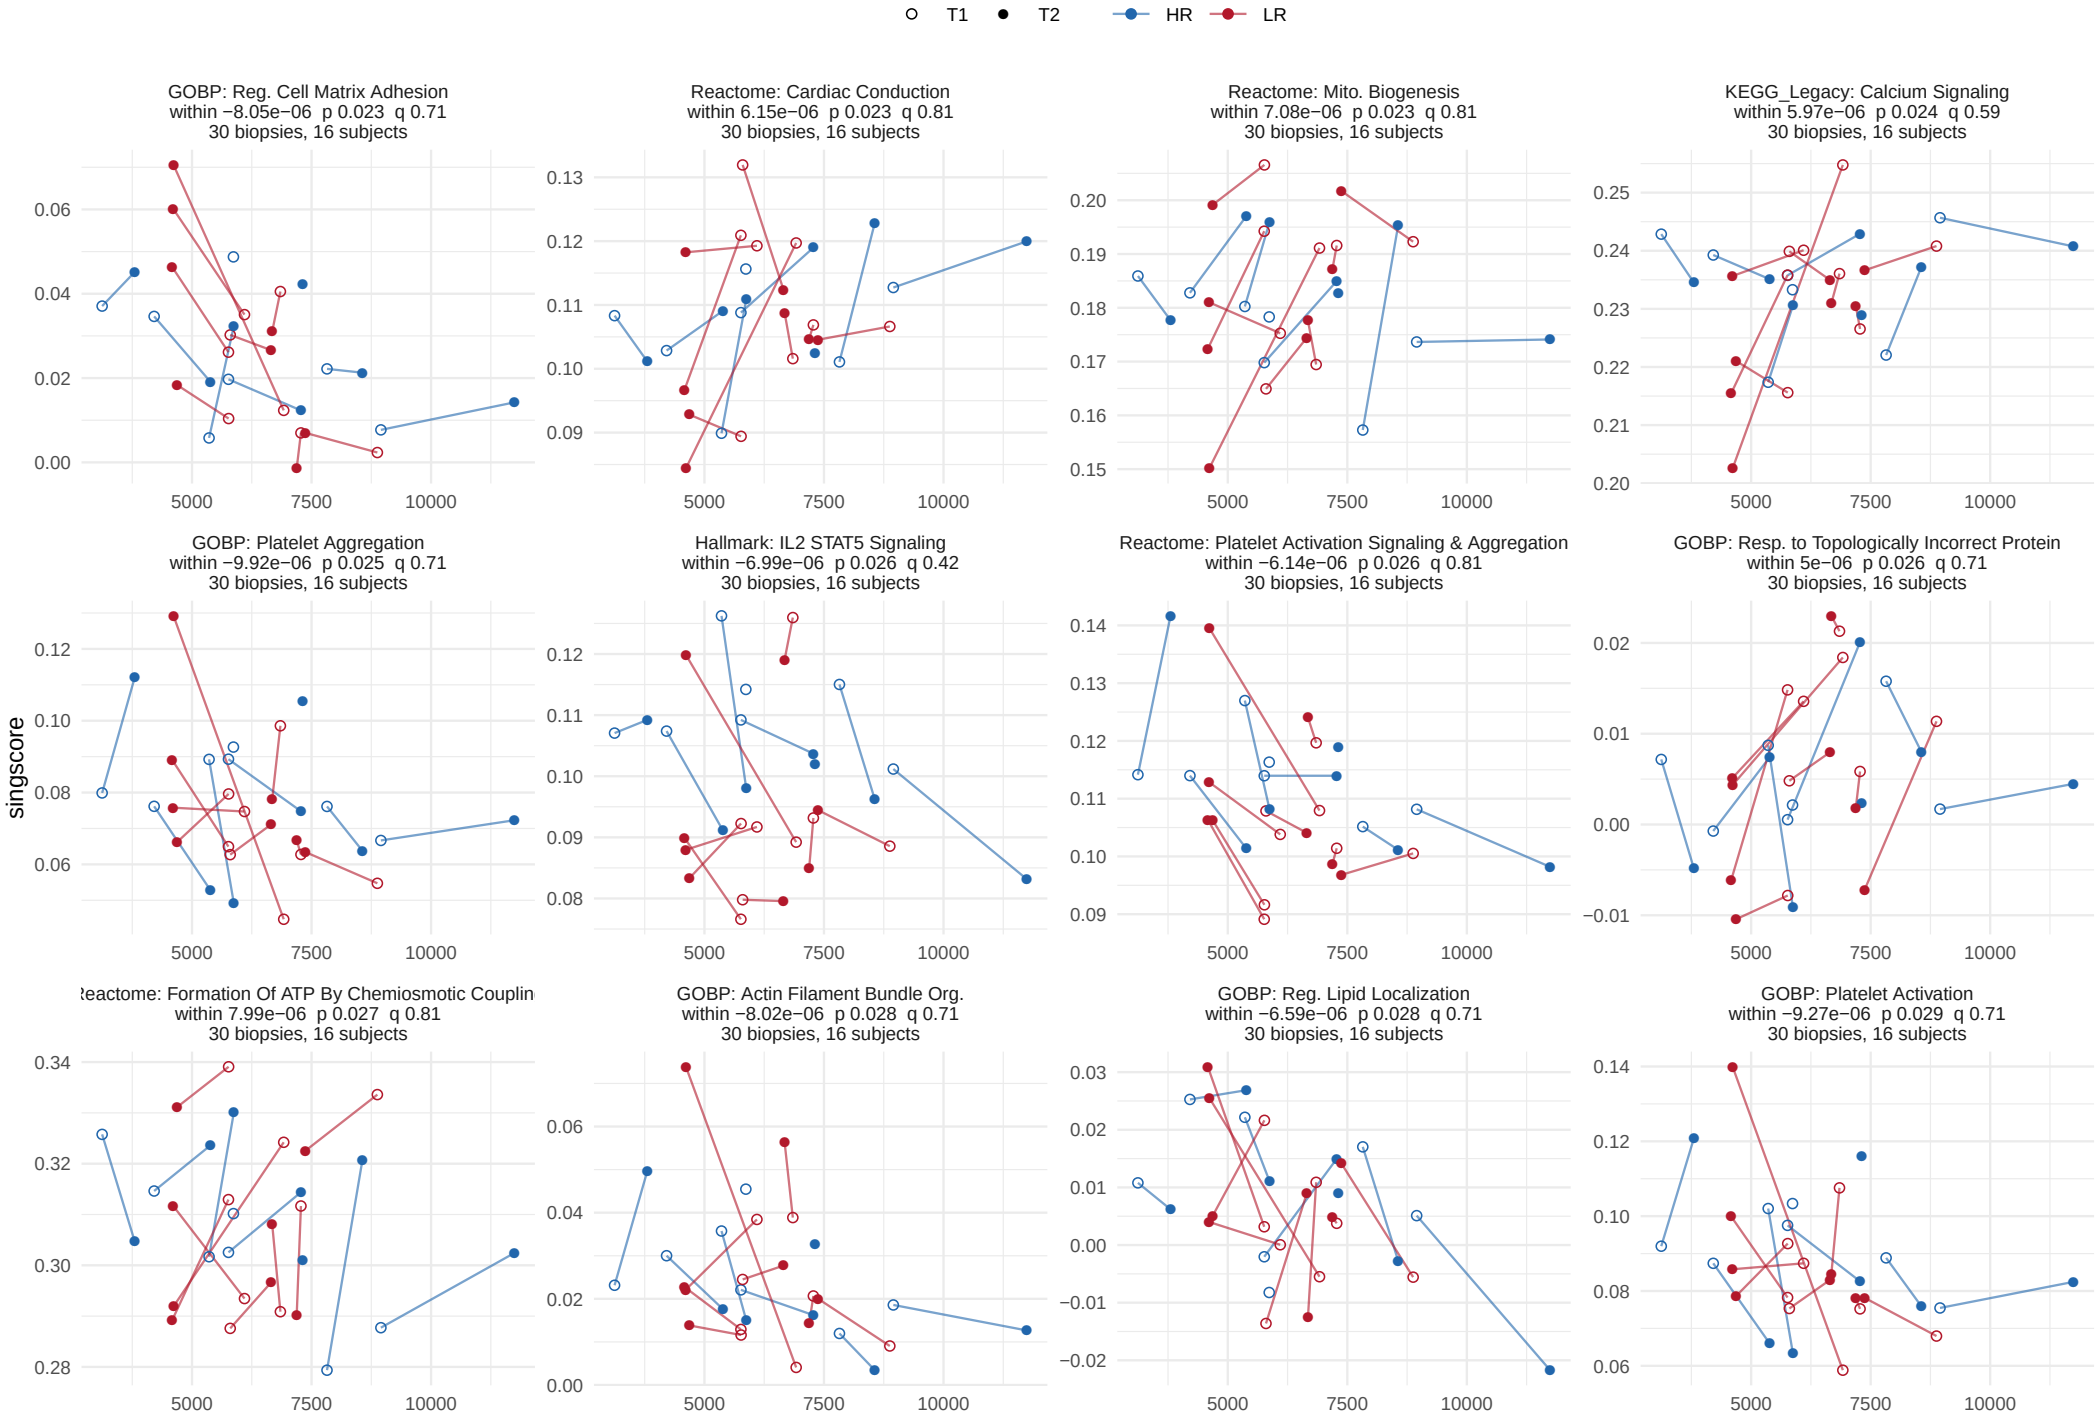

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/05_associate.xlsx, model.

fcsa_type2, within−person term


83 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 4 of 7.

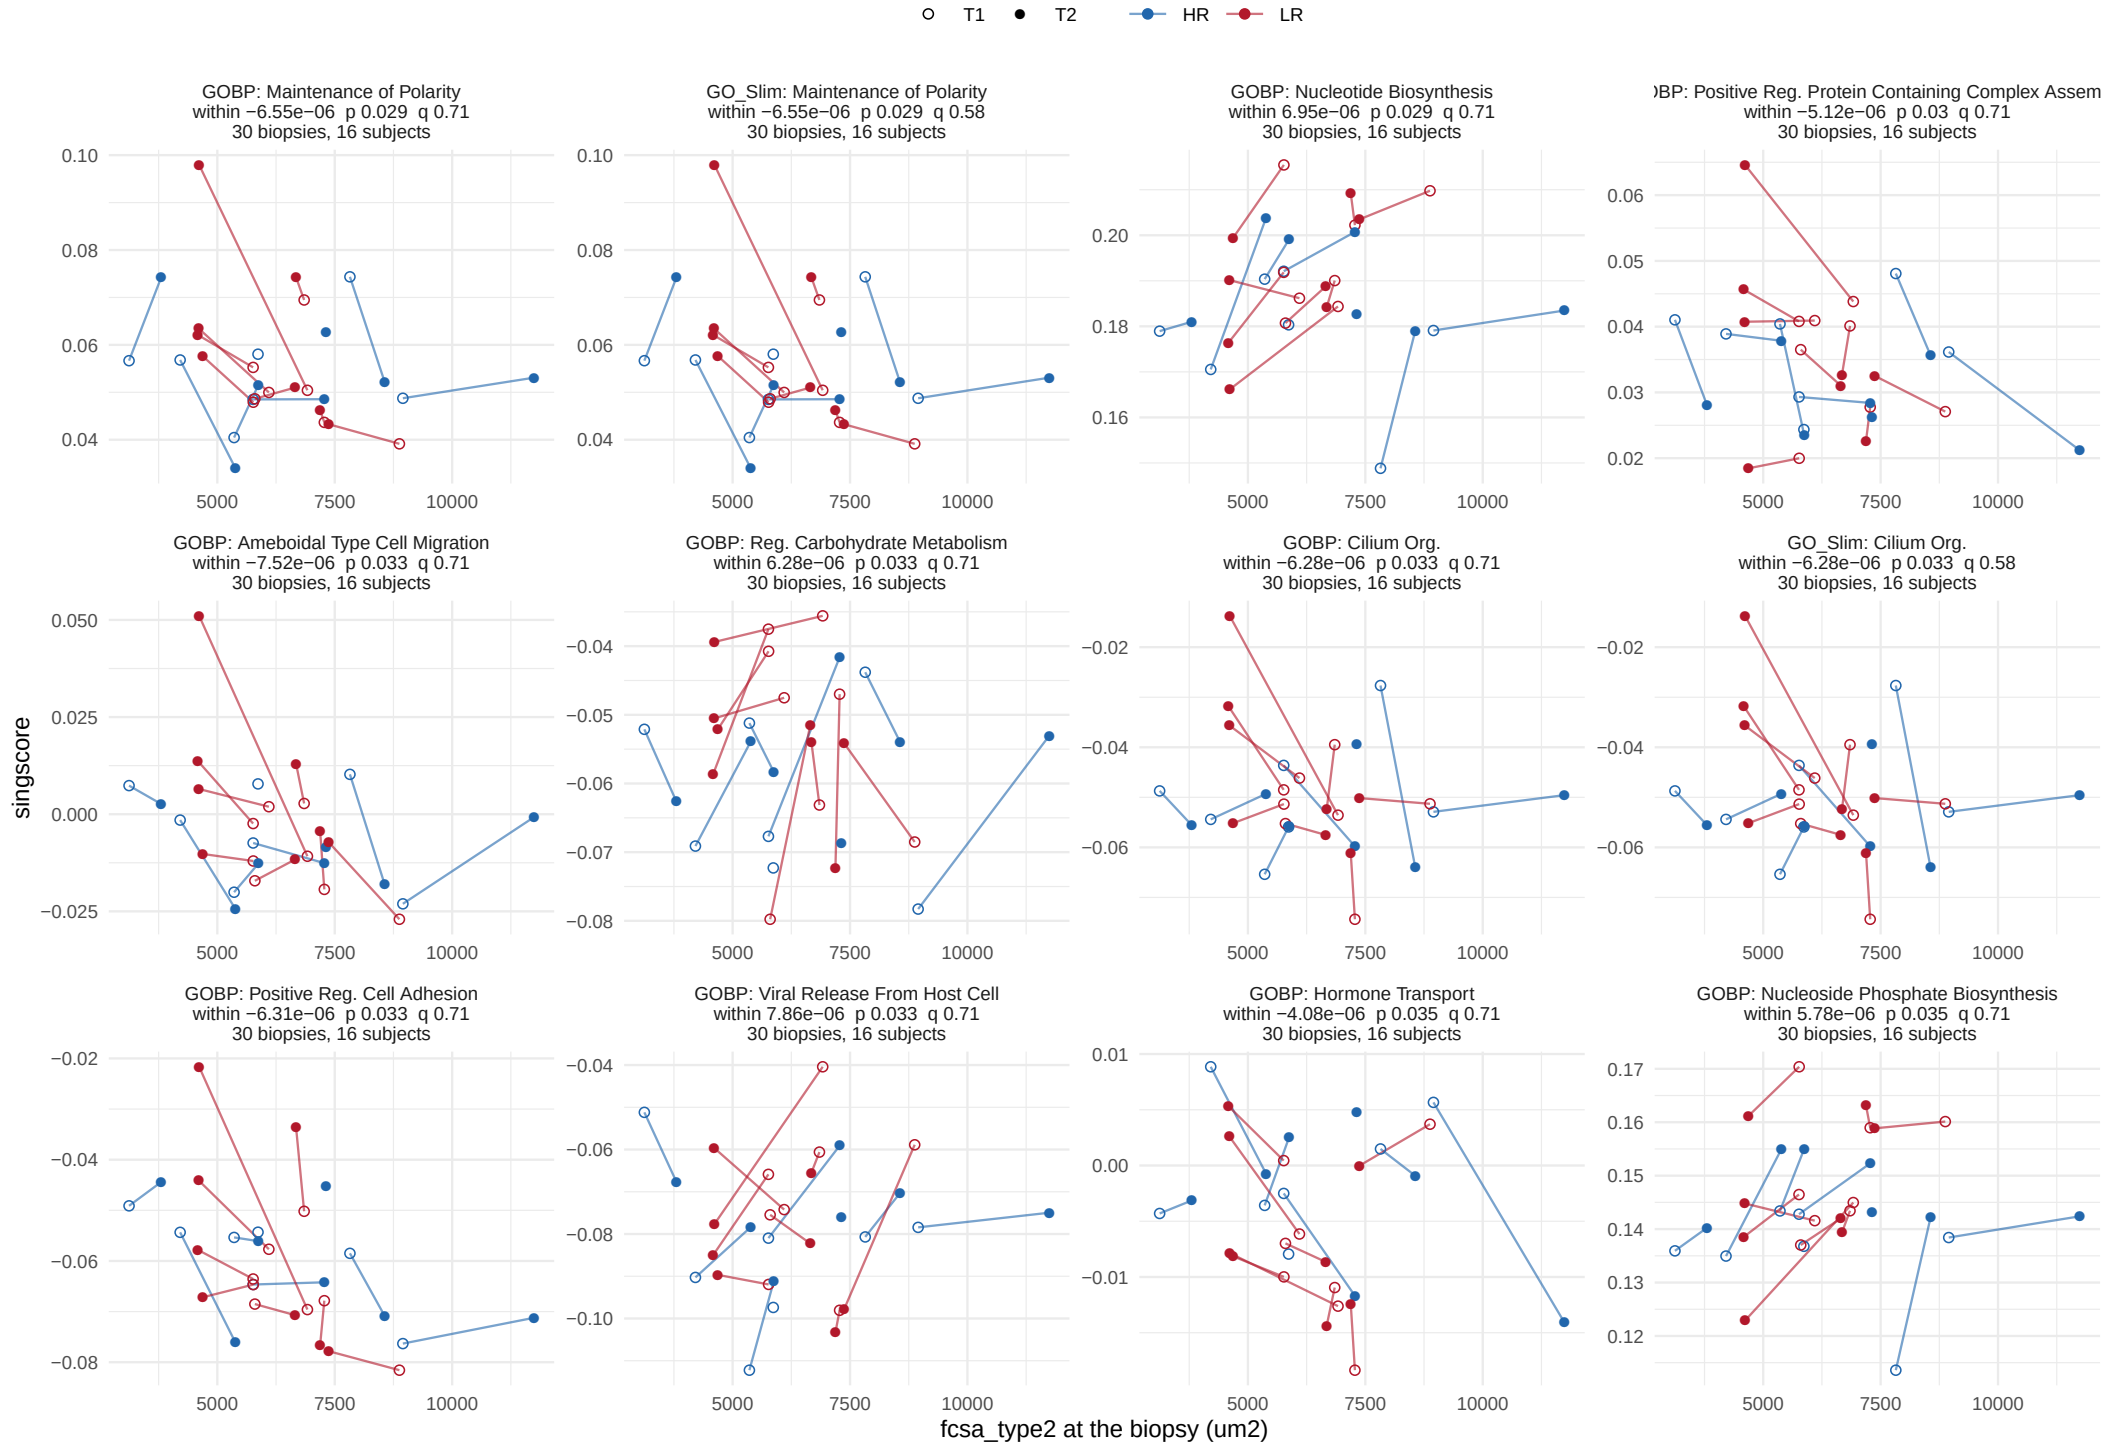

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/05_associate.xlsx, model.

fcsa_type2, within−person term


83 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 5 of 7.

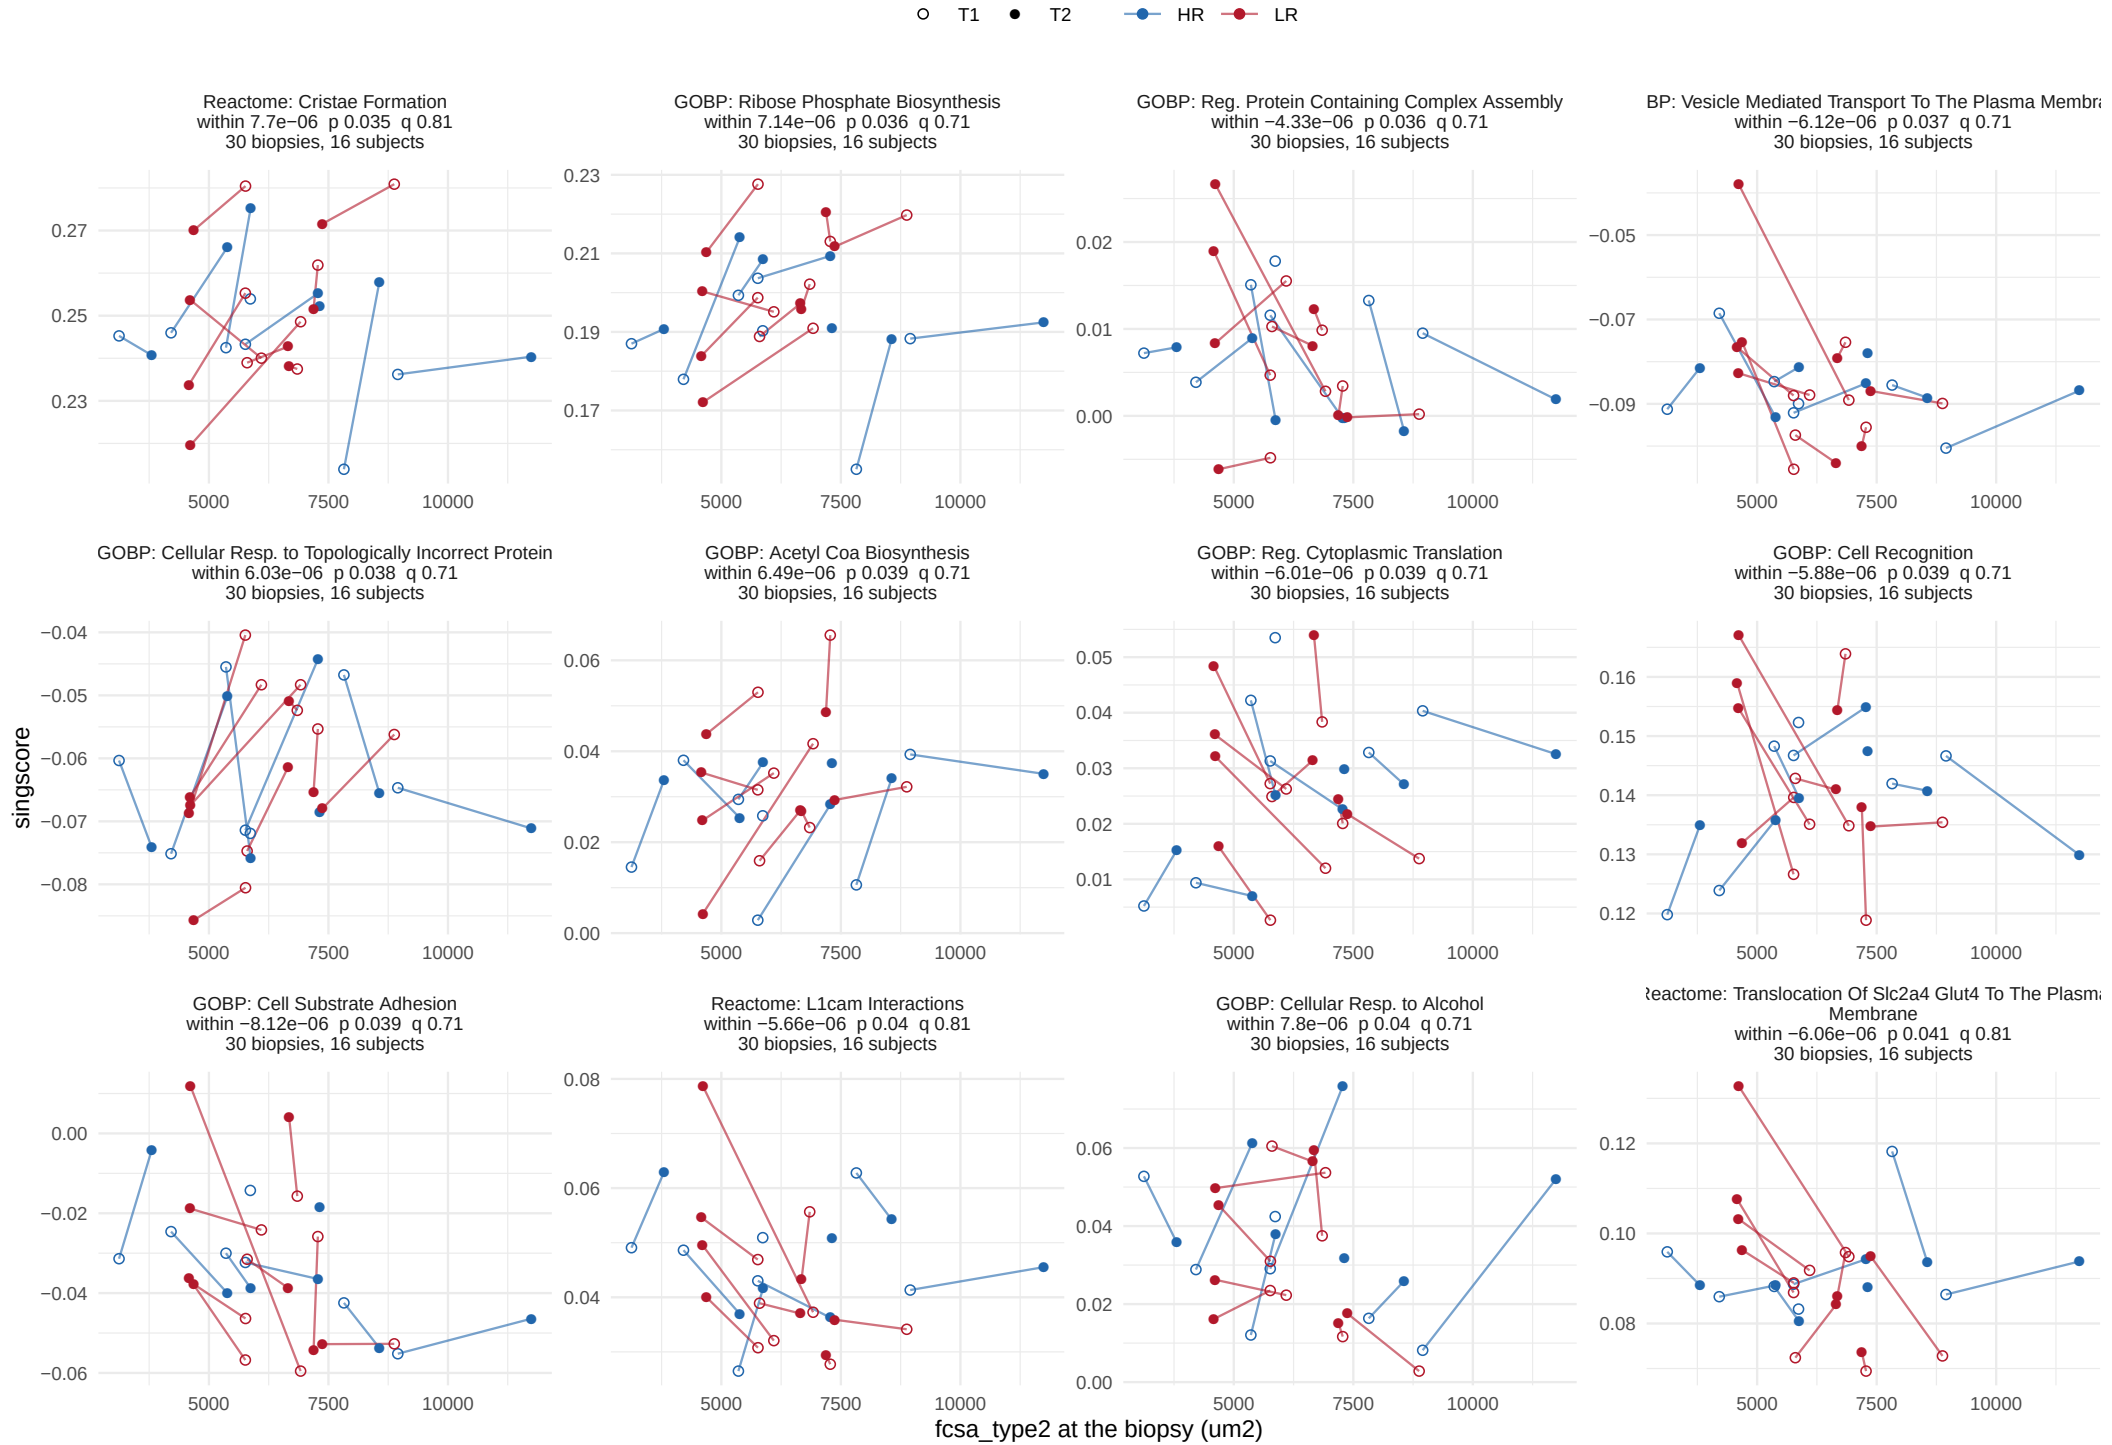

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/05_associate.xlsx, model.

fcsa_type2, within−person term


83 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 6 of 7.

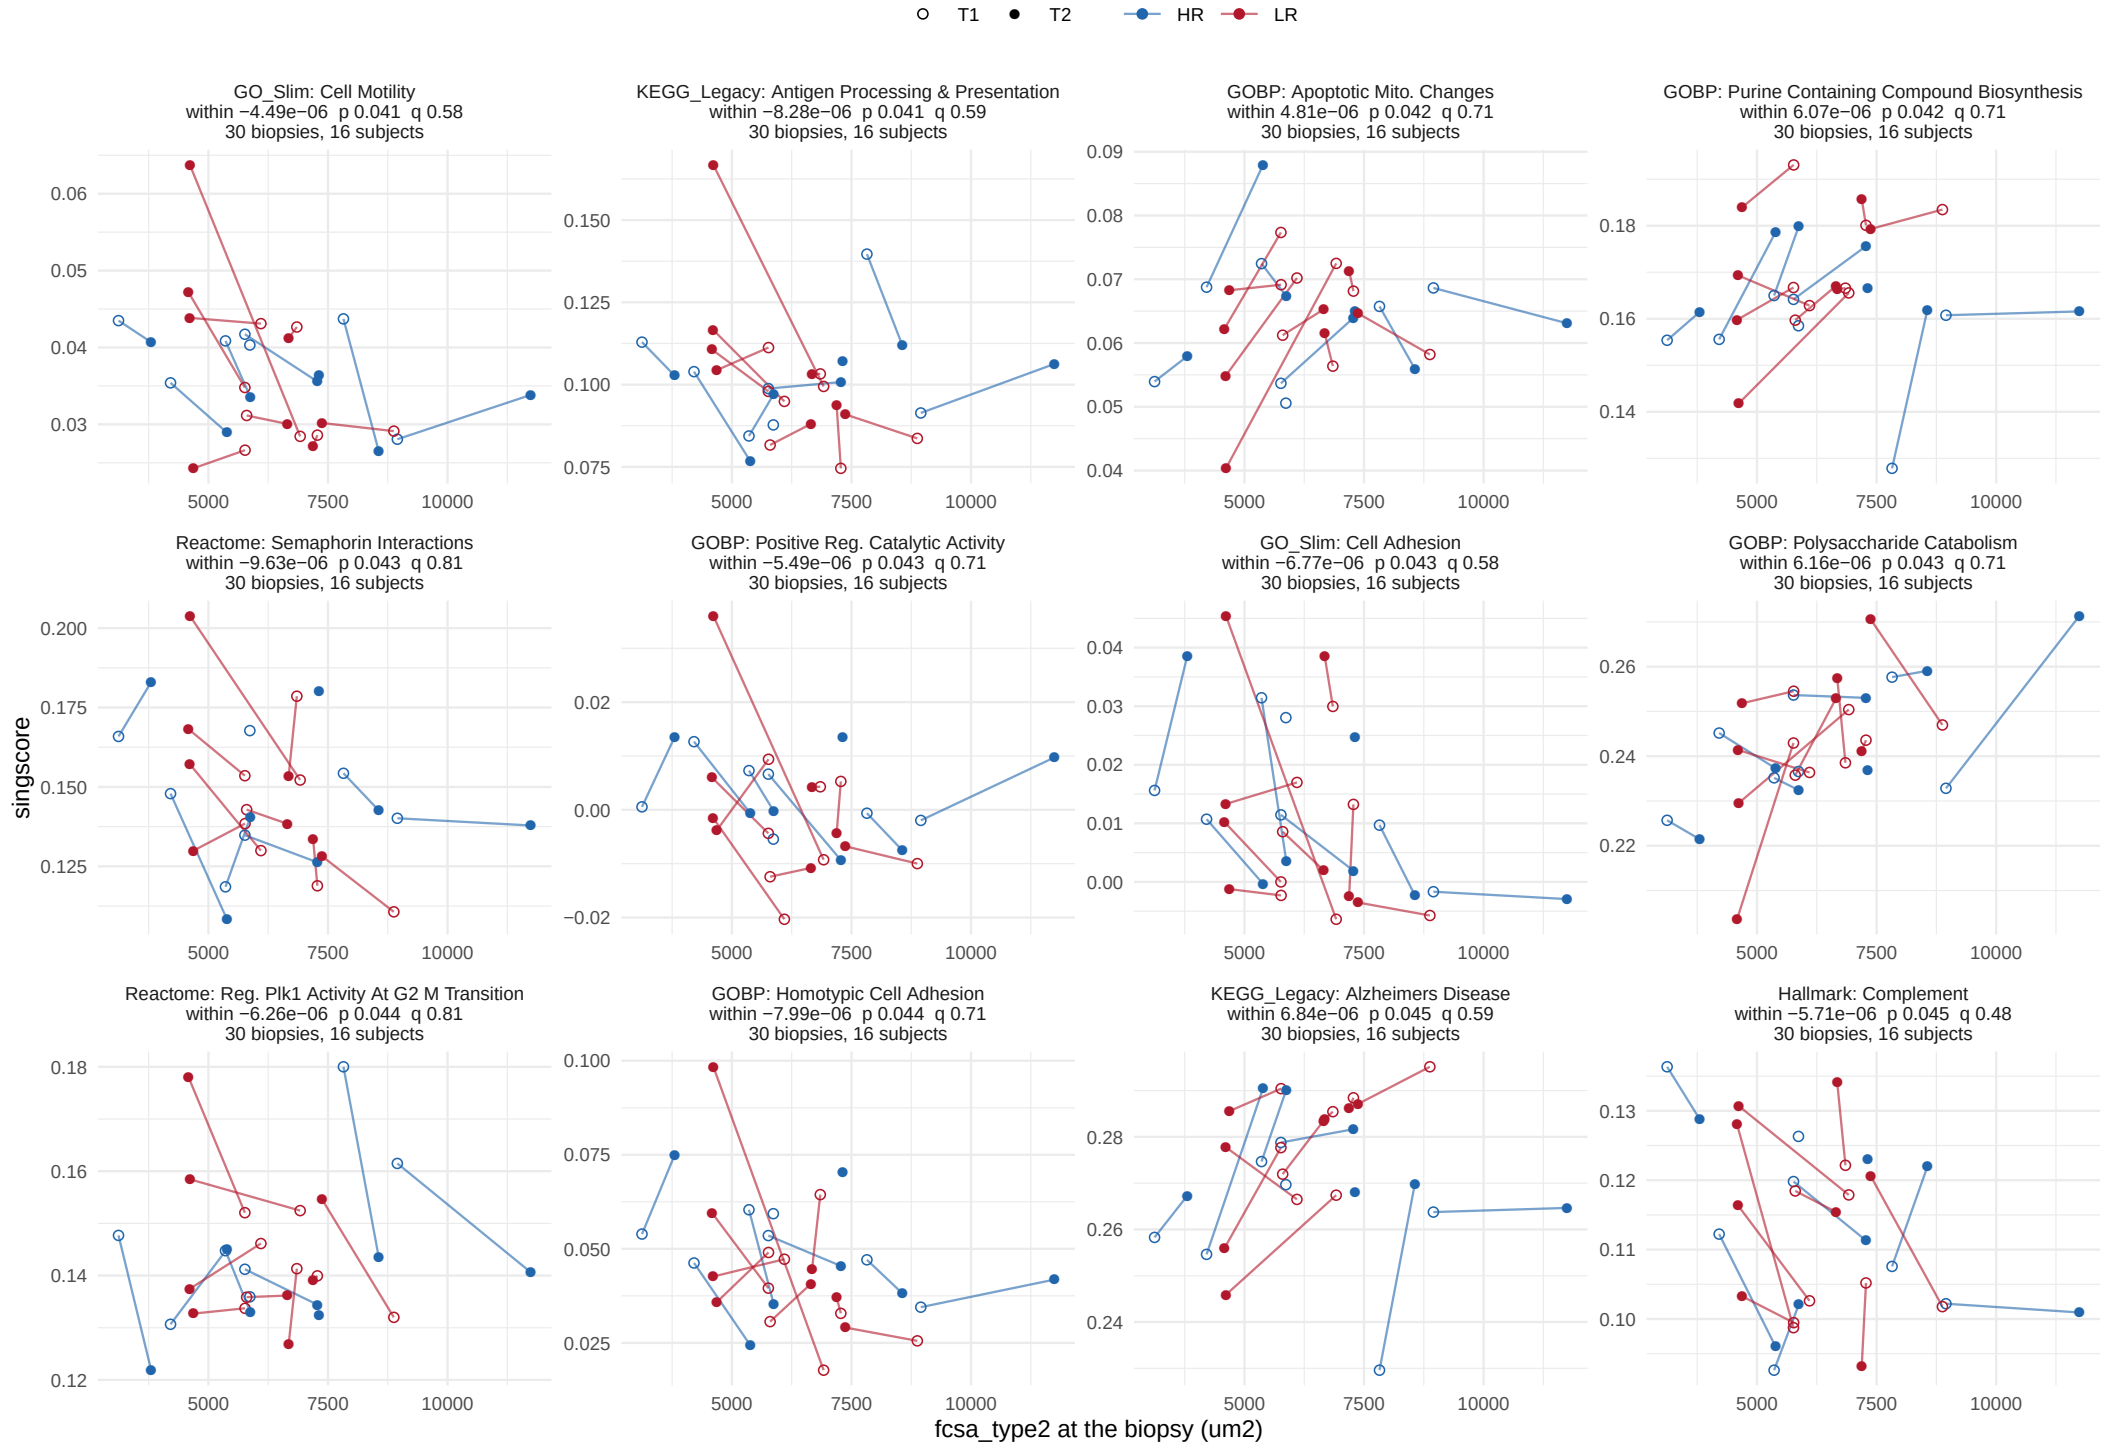

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/05_associate.xlsx, model.

fcsa_type2, within−person term


83 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 7 of 7.

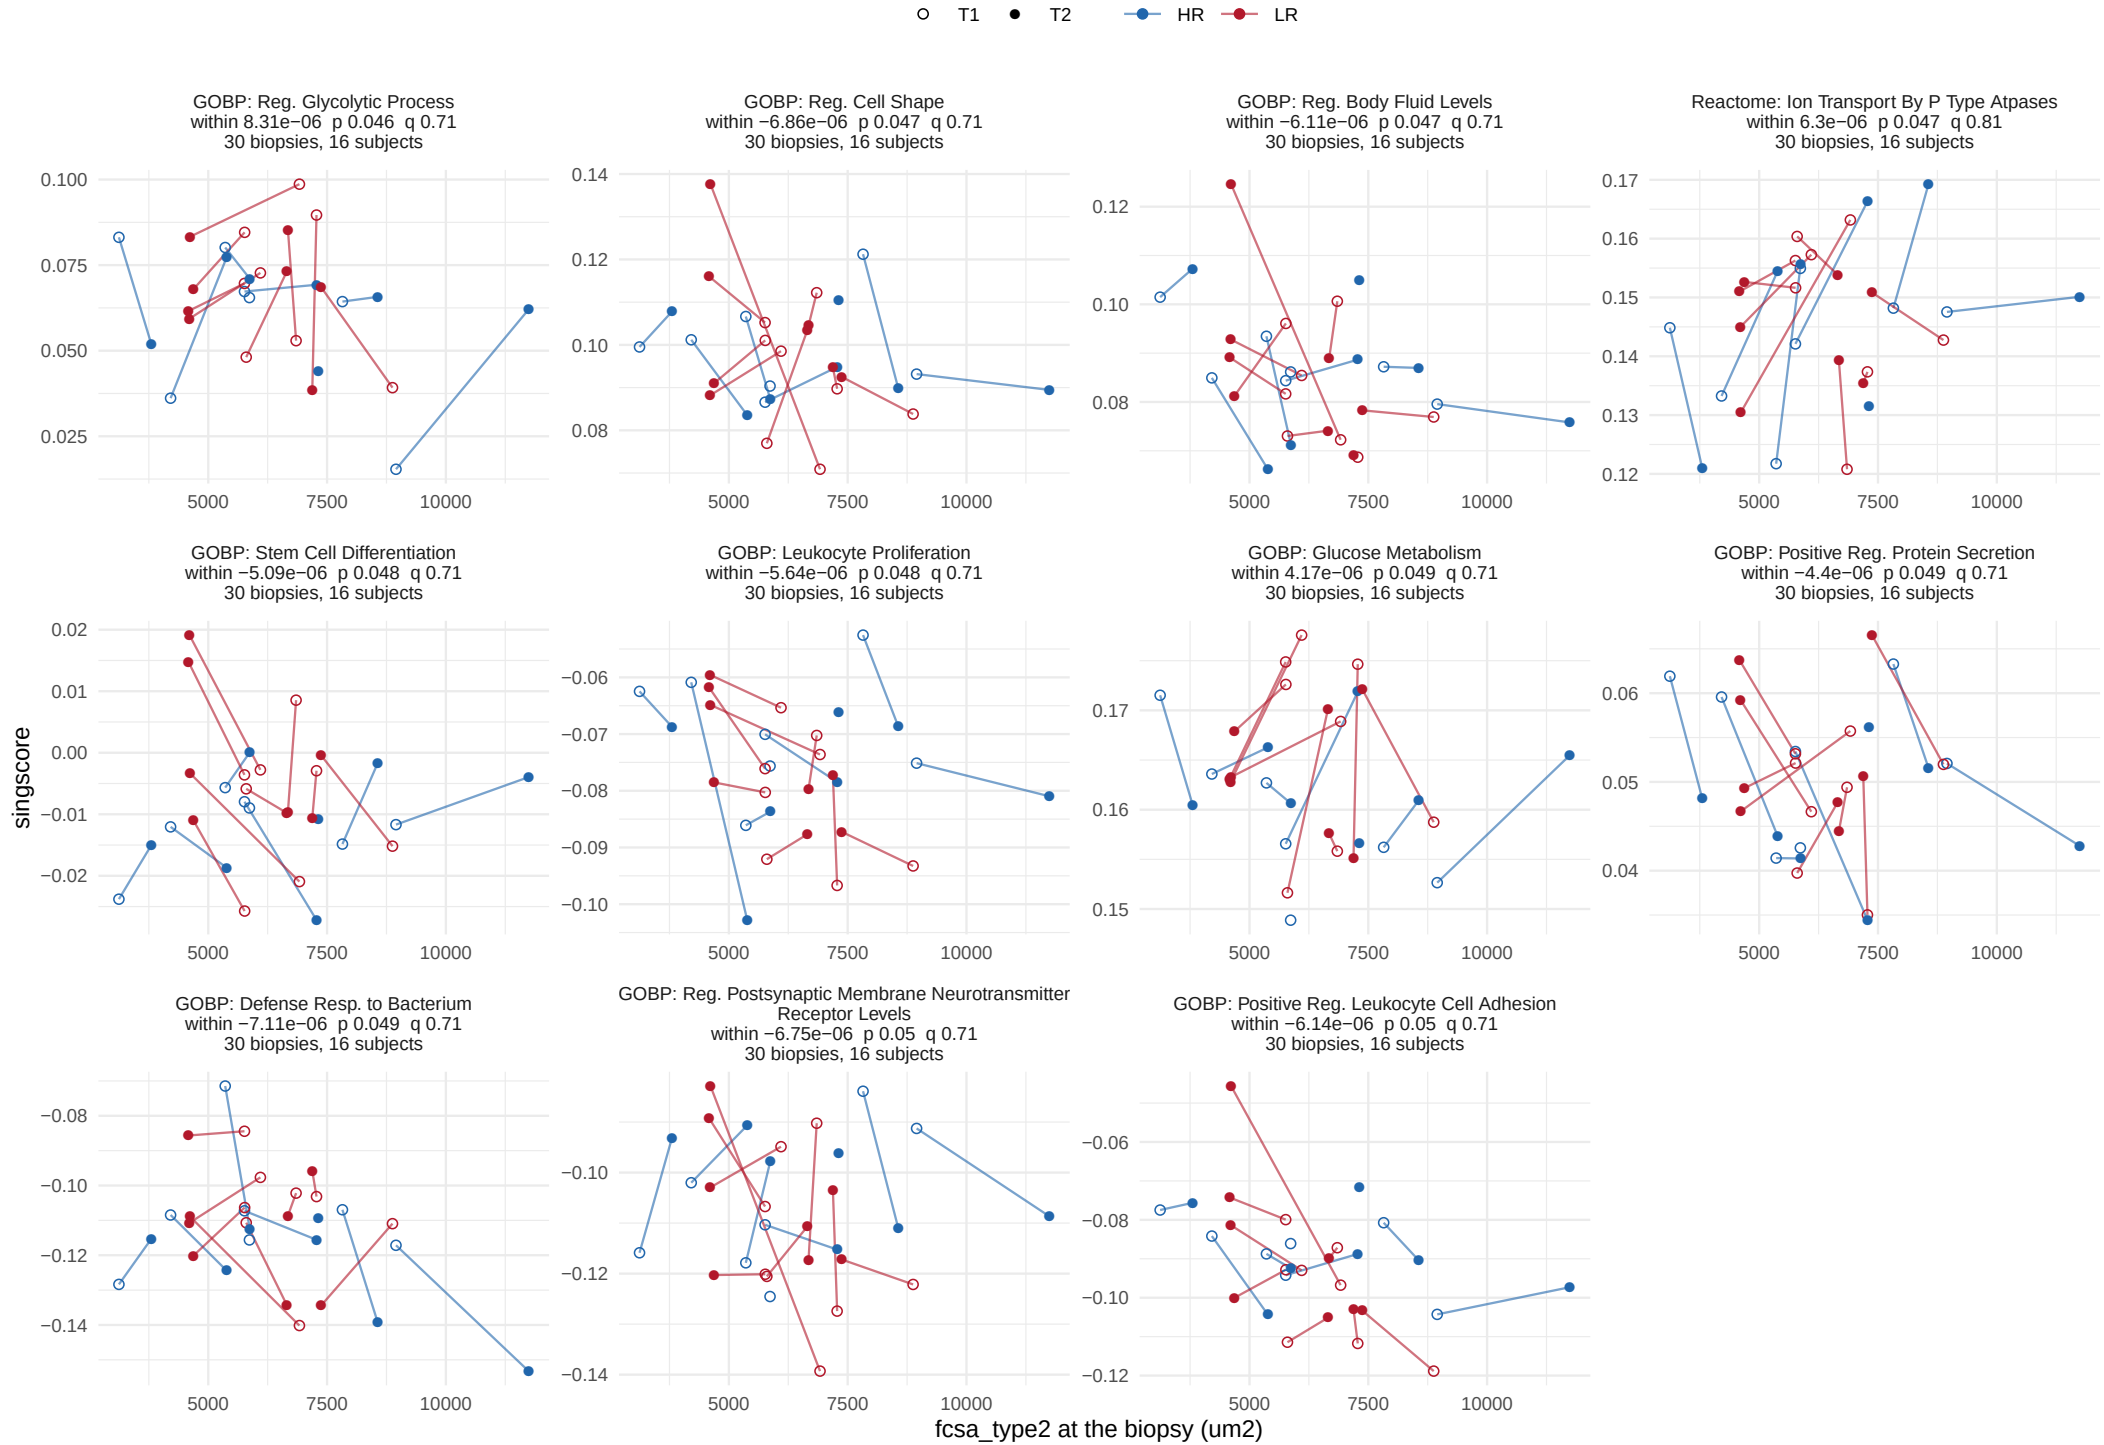

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/05_associate.xlsx, model.

fcsa_type2, between−person term


92 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 1 of 8.

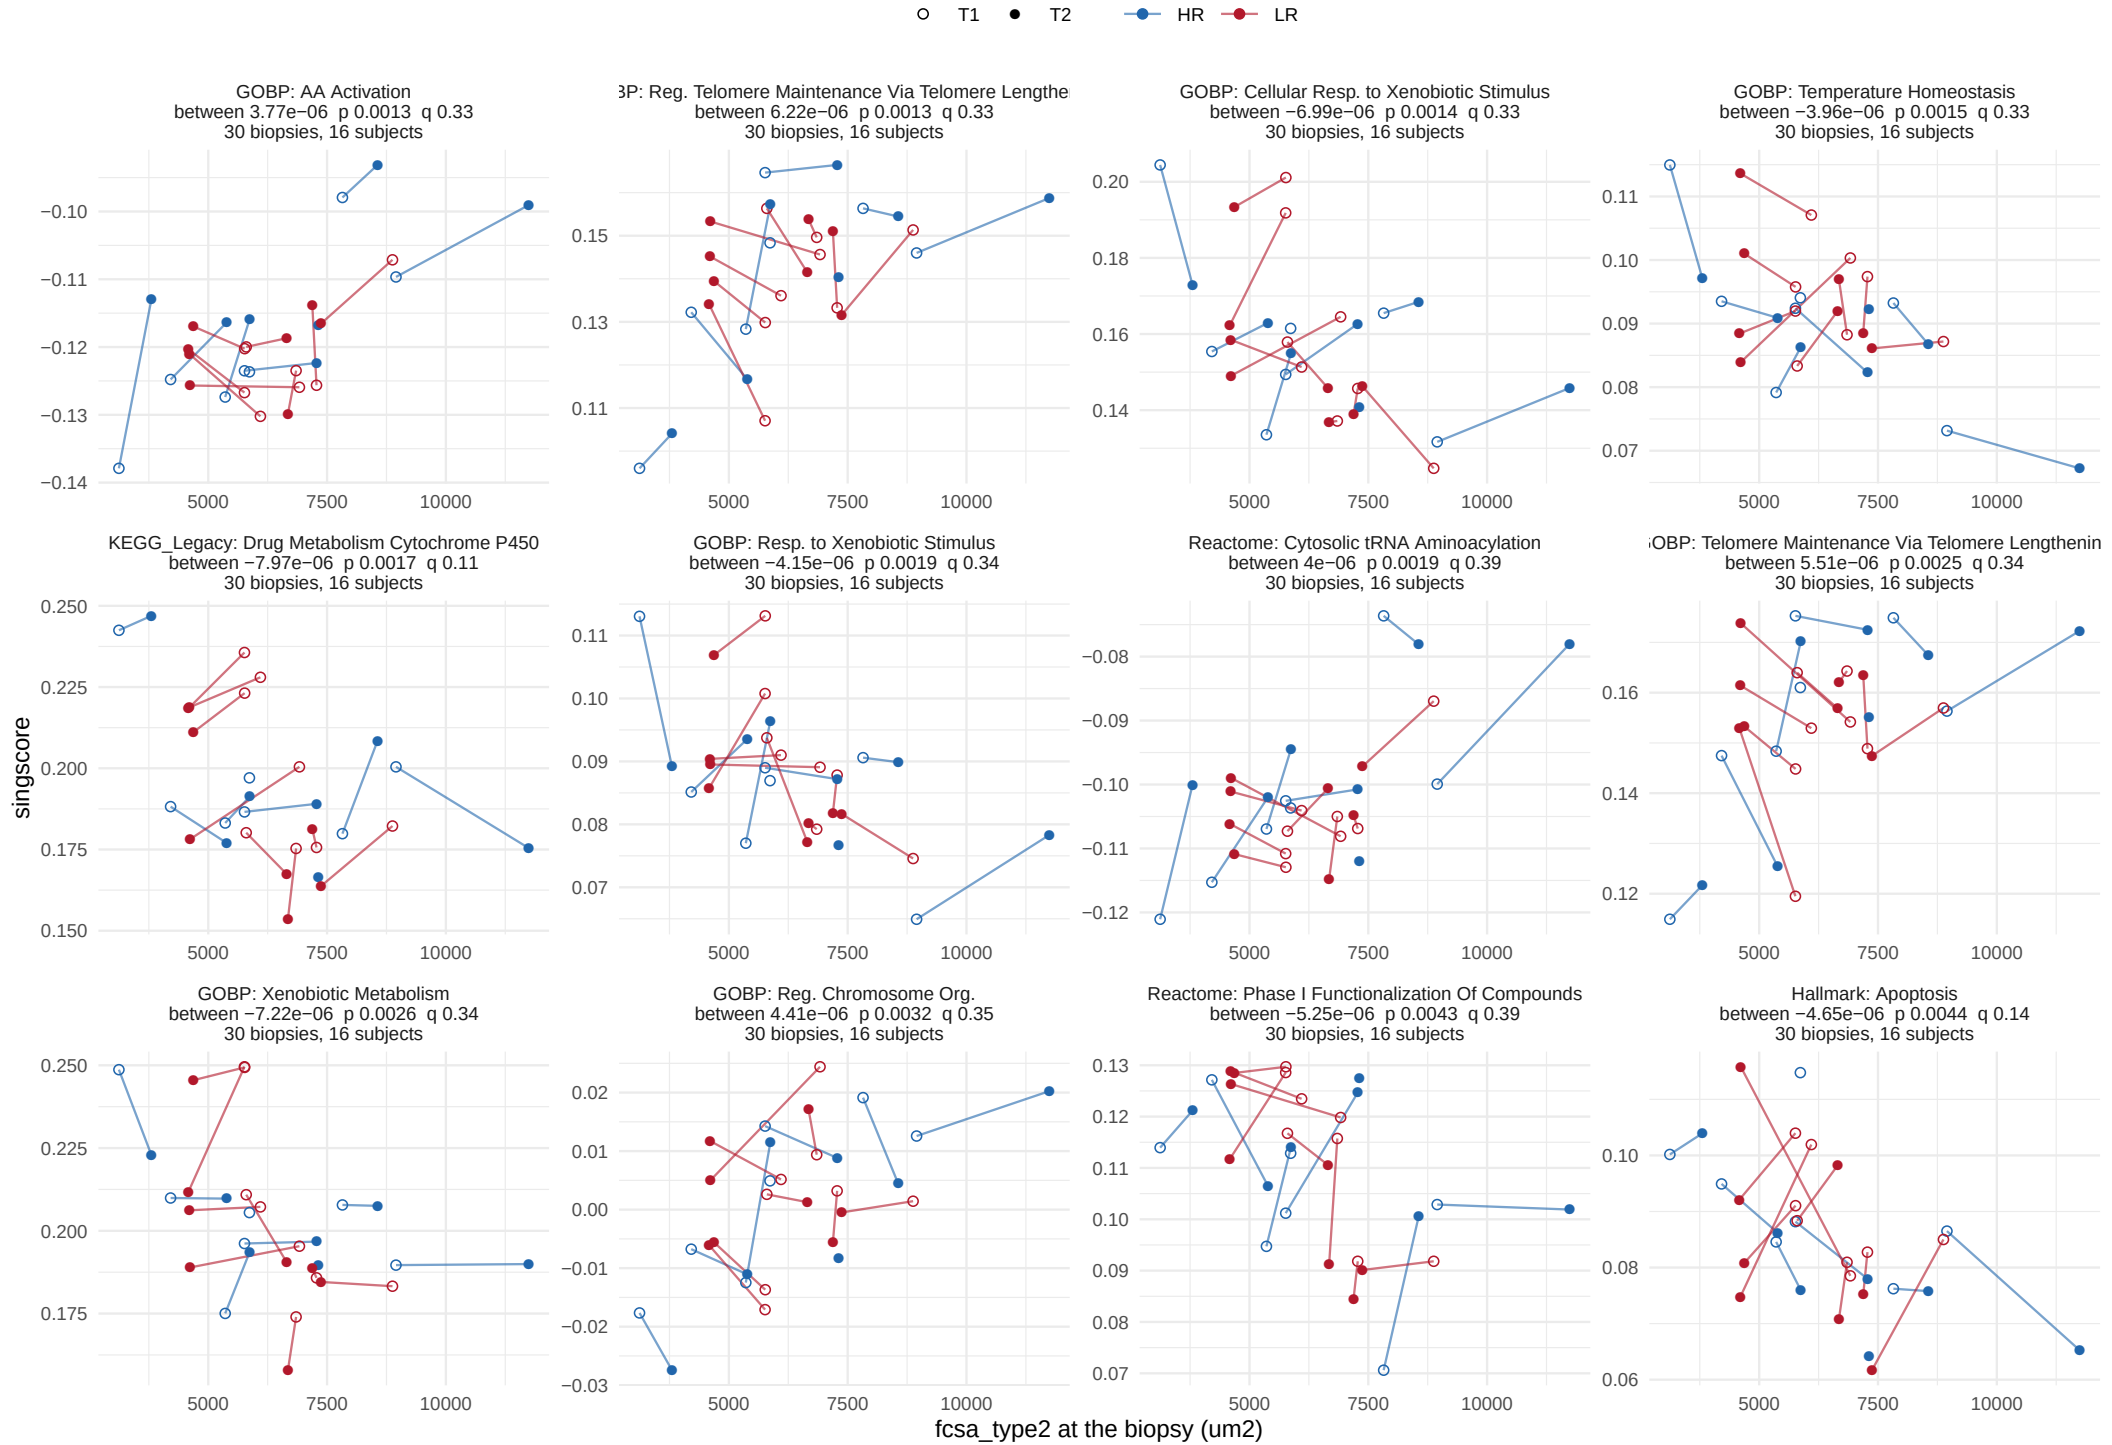

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/05_associate.xlsx, model.

fcsa_type2, between−person term


92 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 2 of 8.

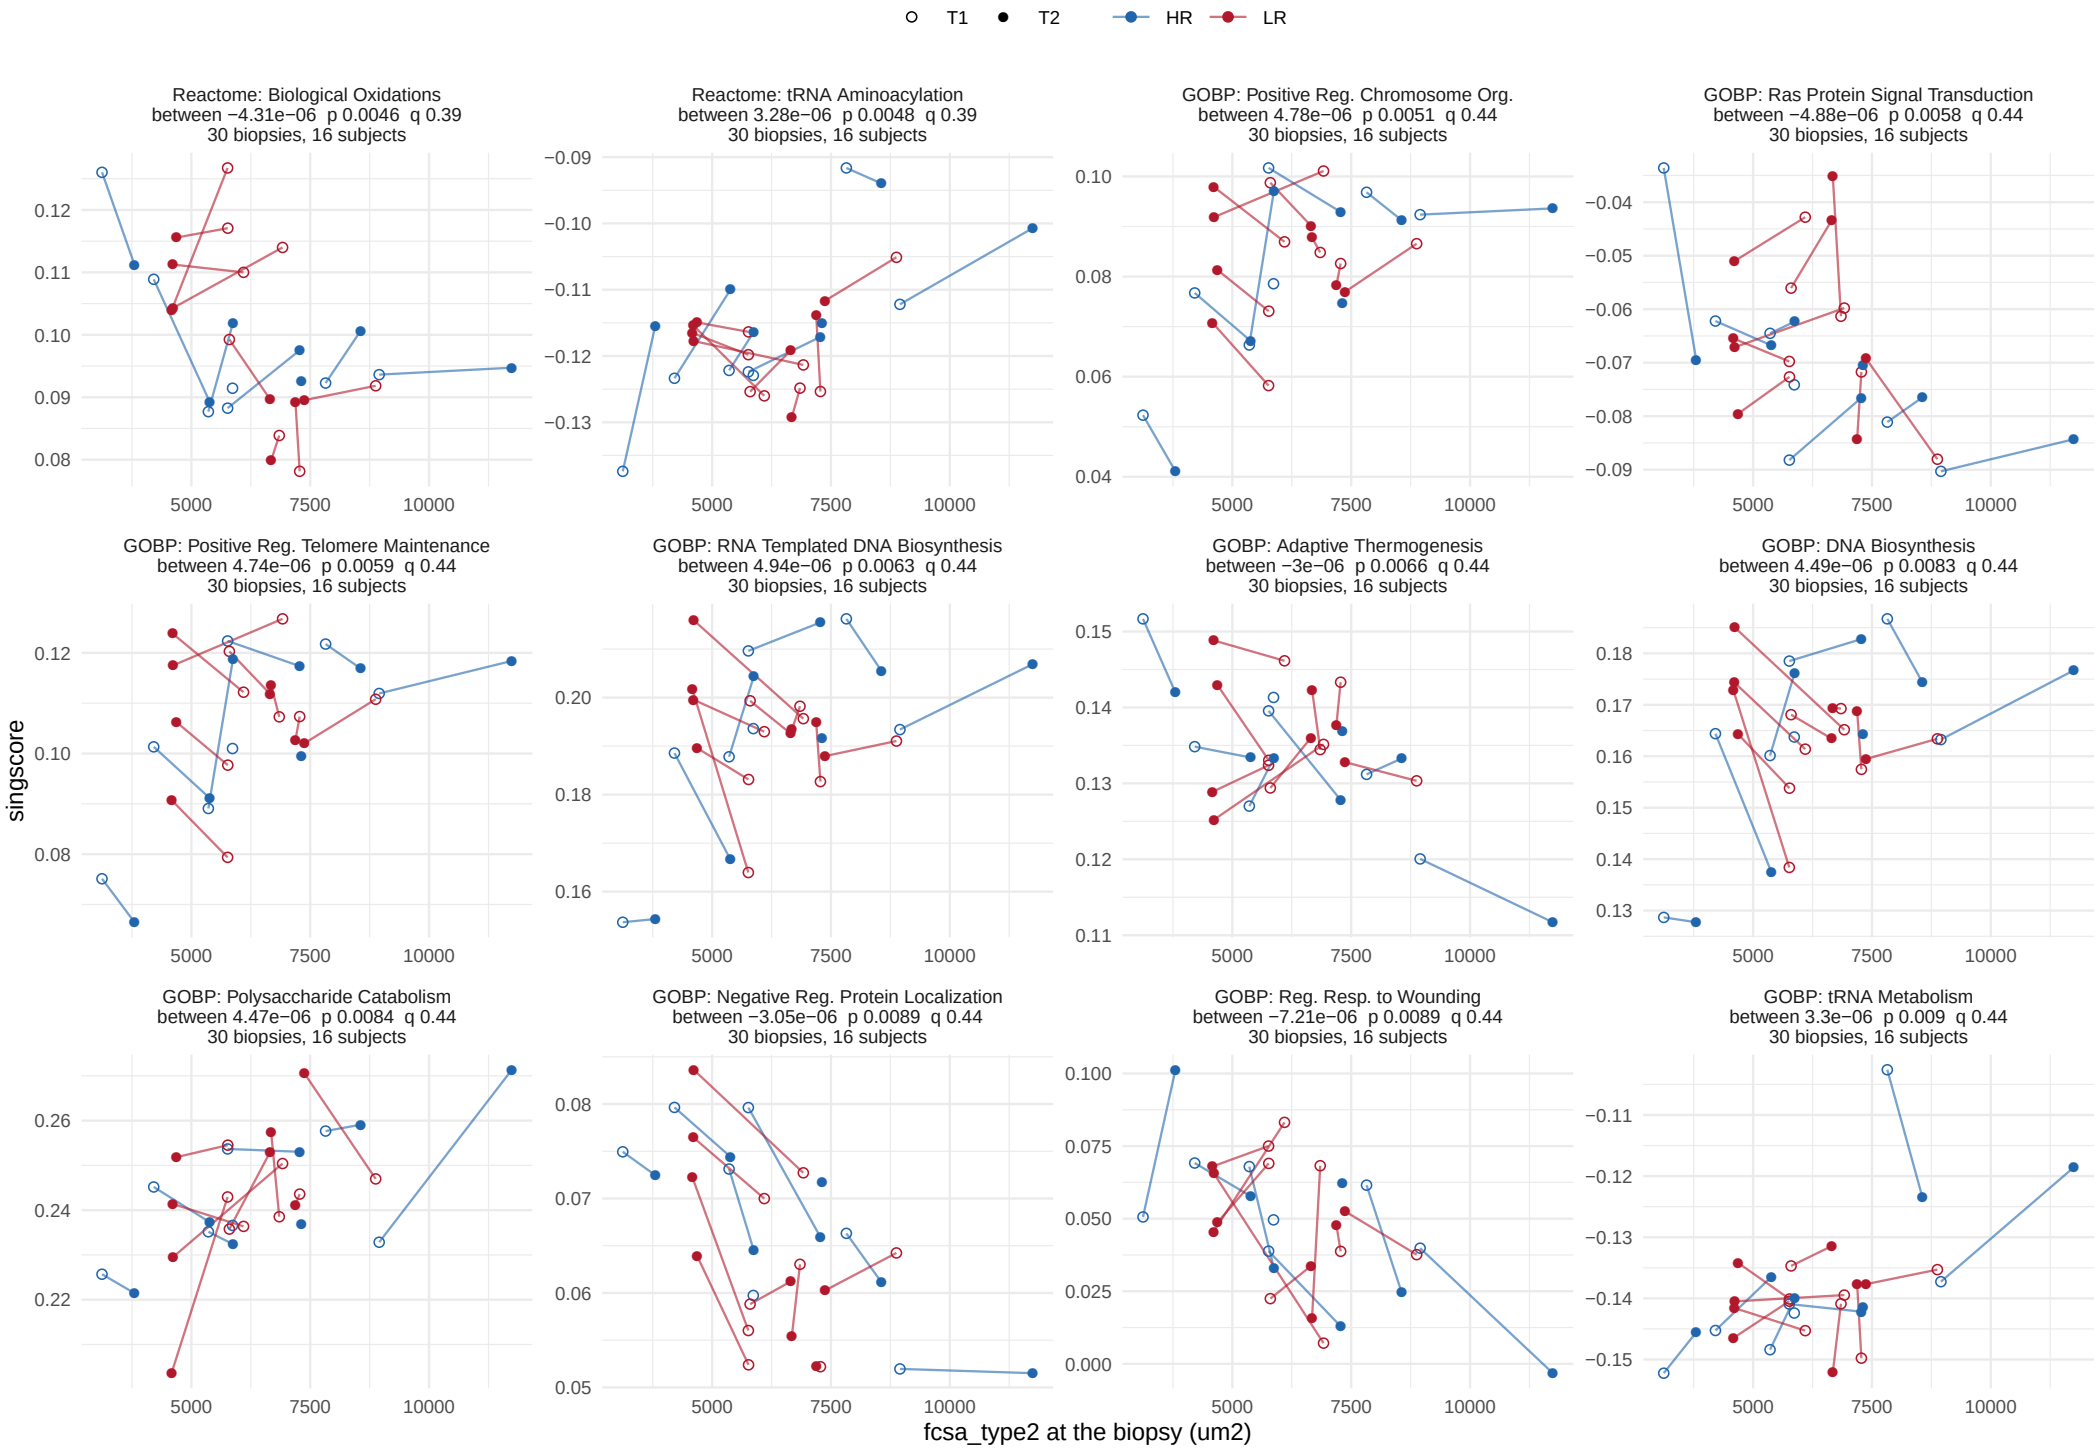

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/05_associate.xlsx, model.

fcsa_type2, between−person term


92 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 3 of 8.

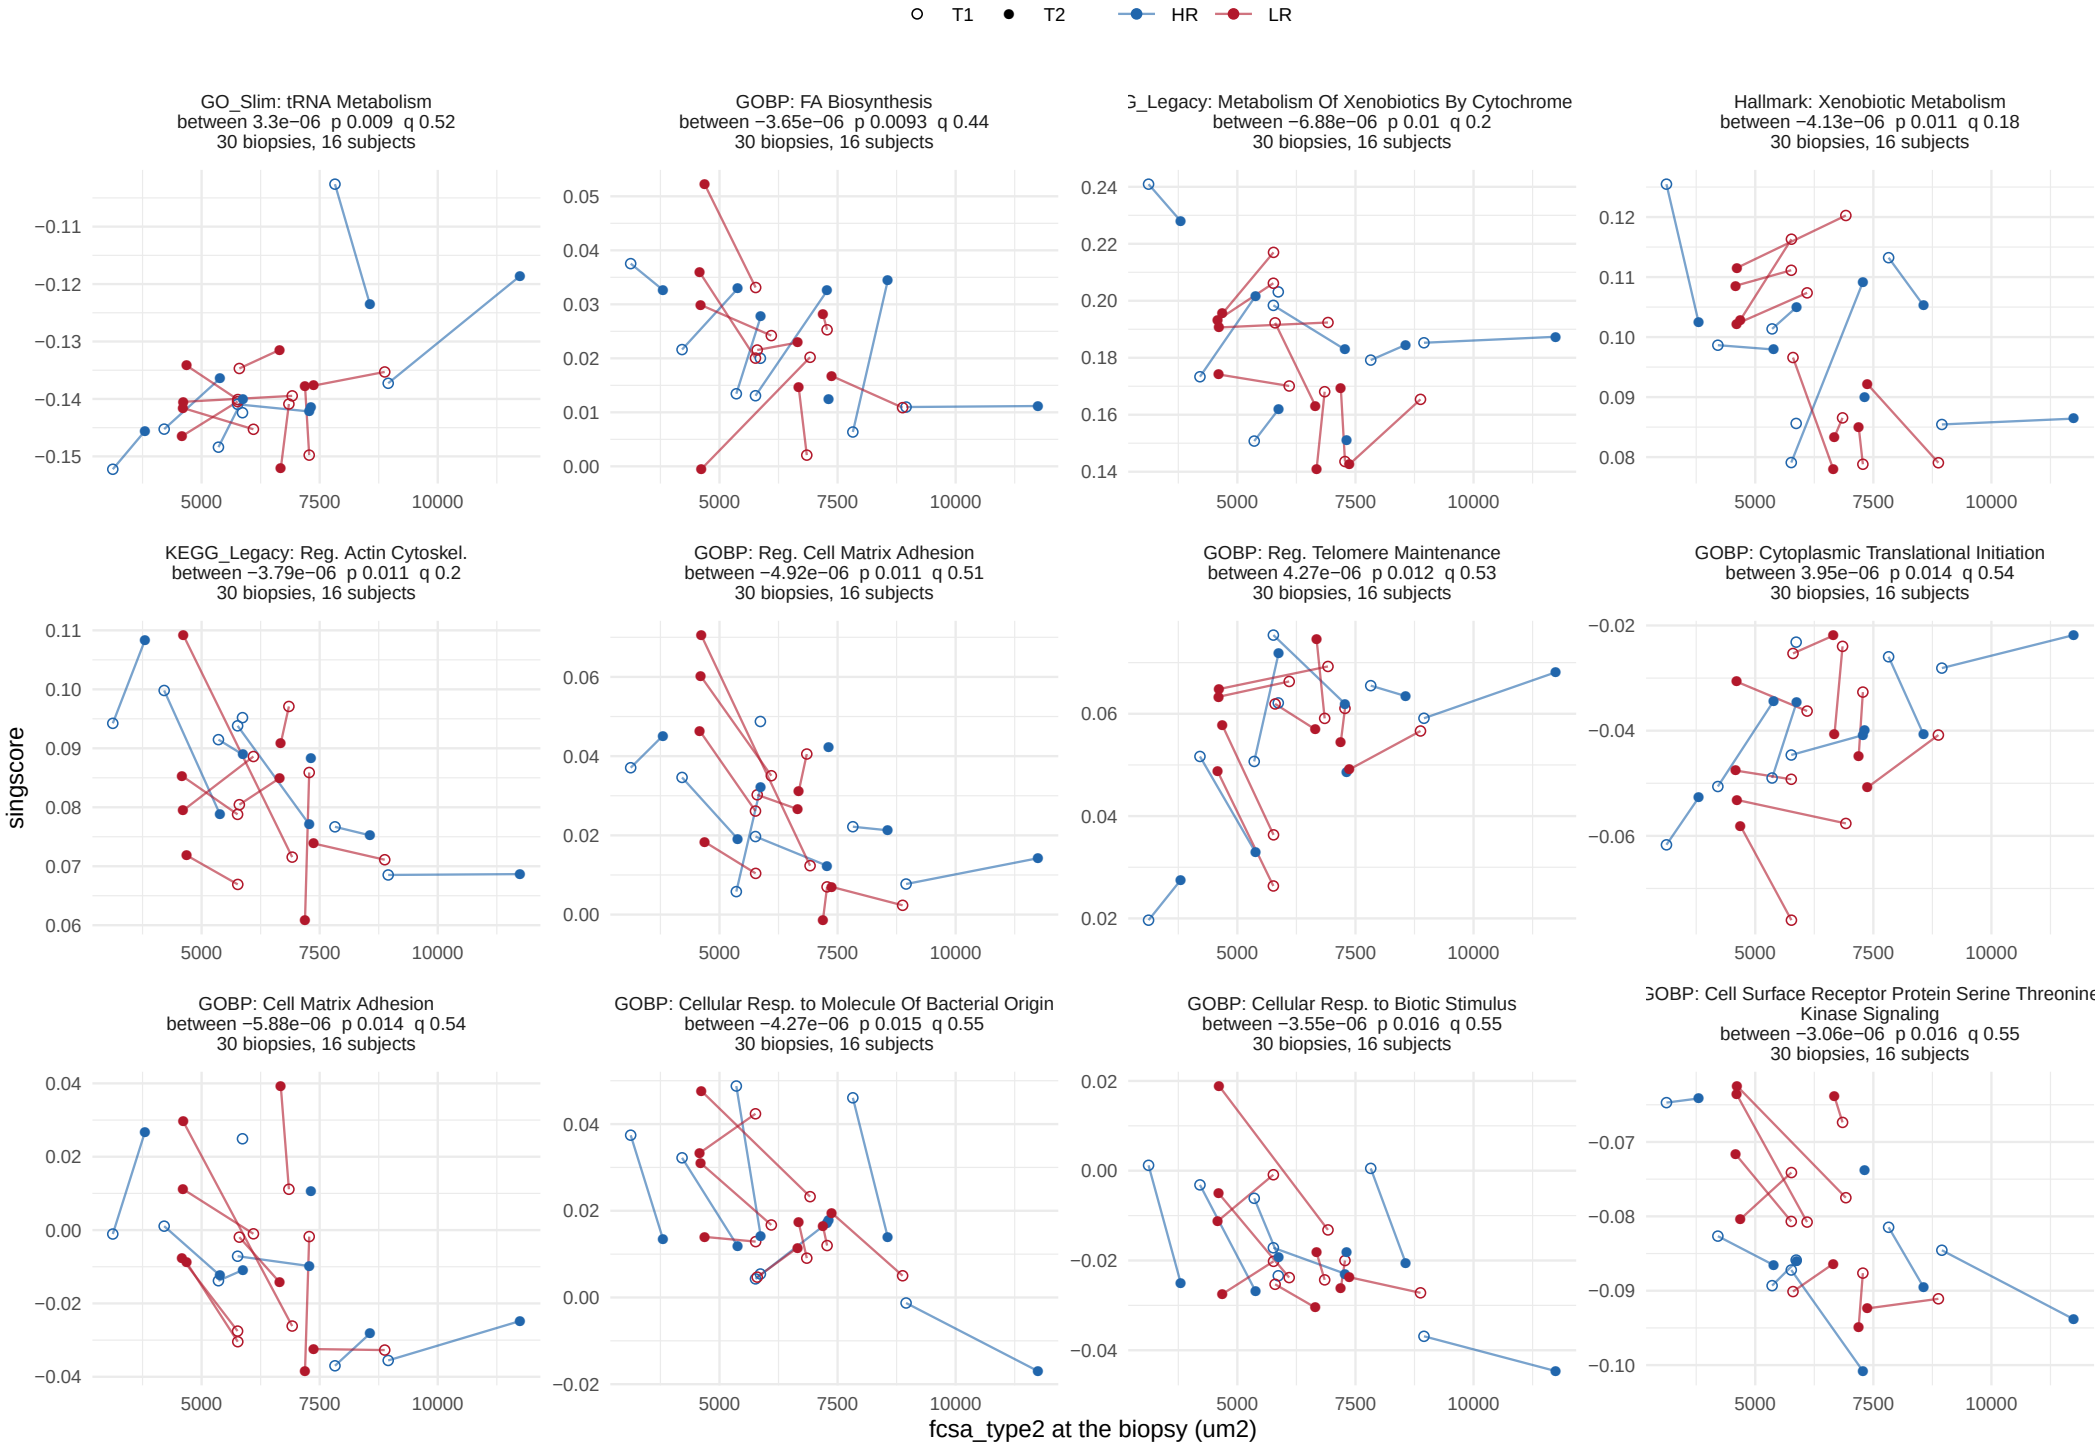

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/05_associate.xlsx, model.

fcsa_type2, between−person term


92 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 4 of 8.

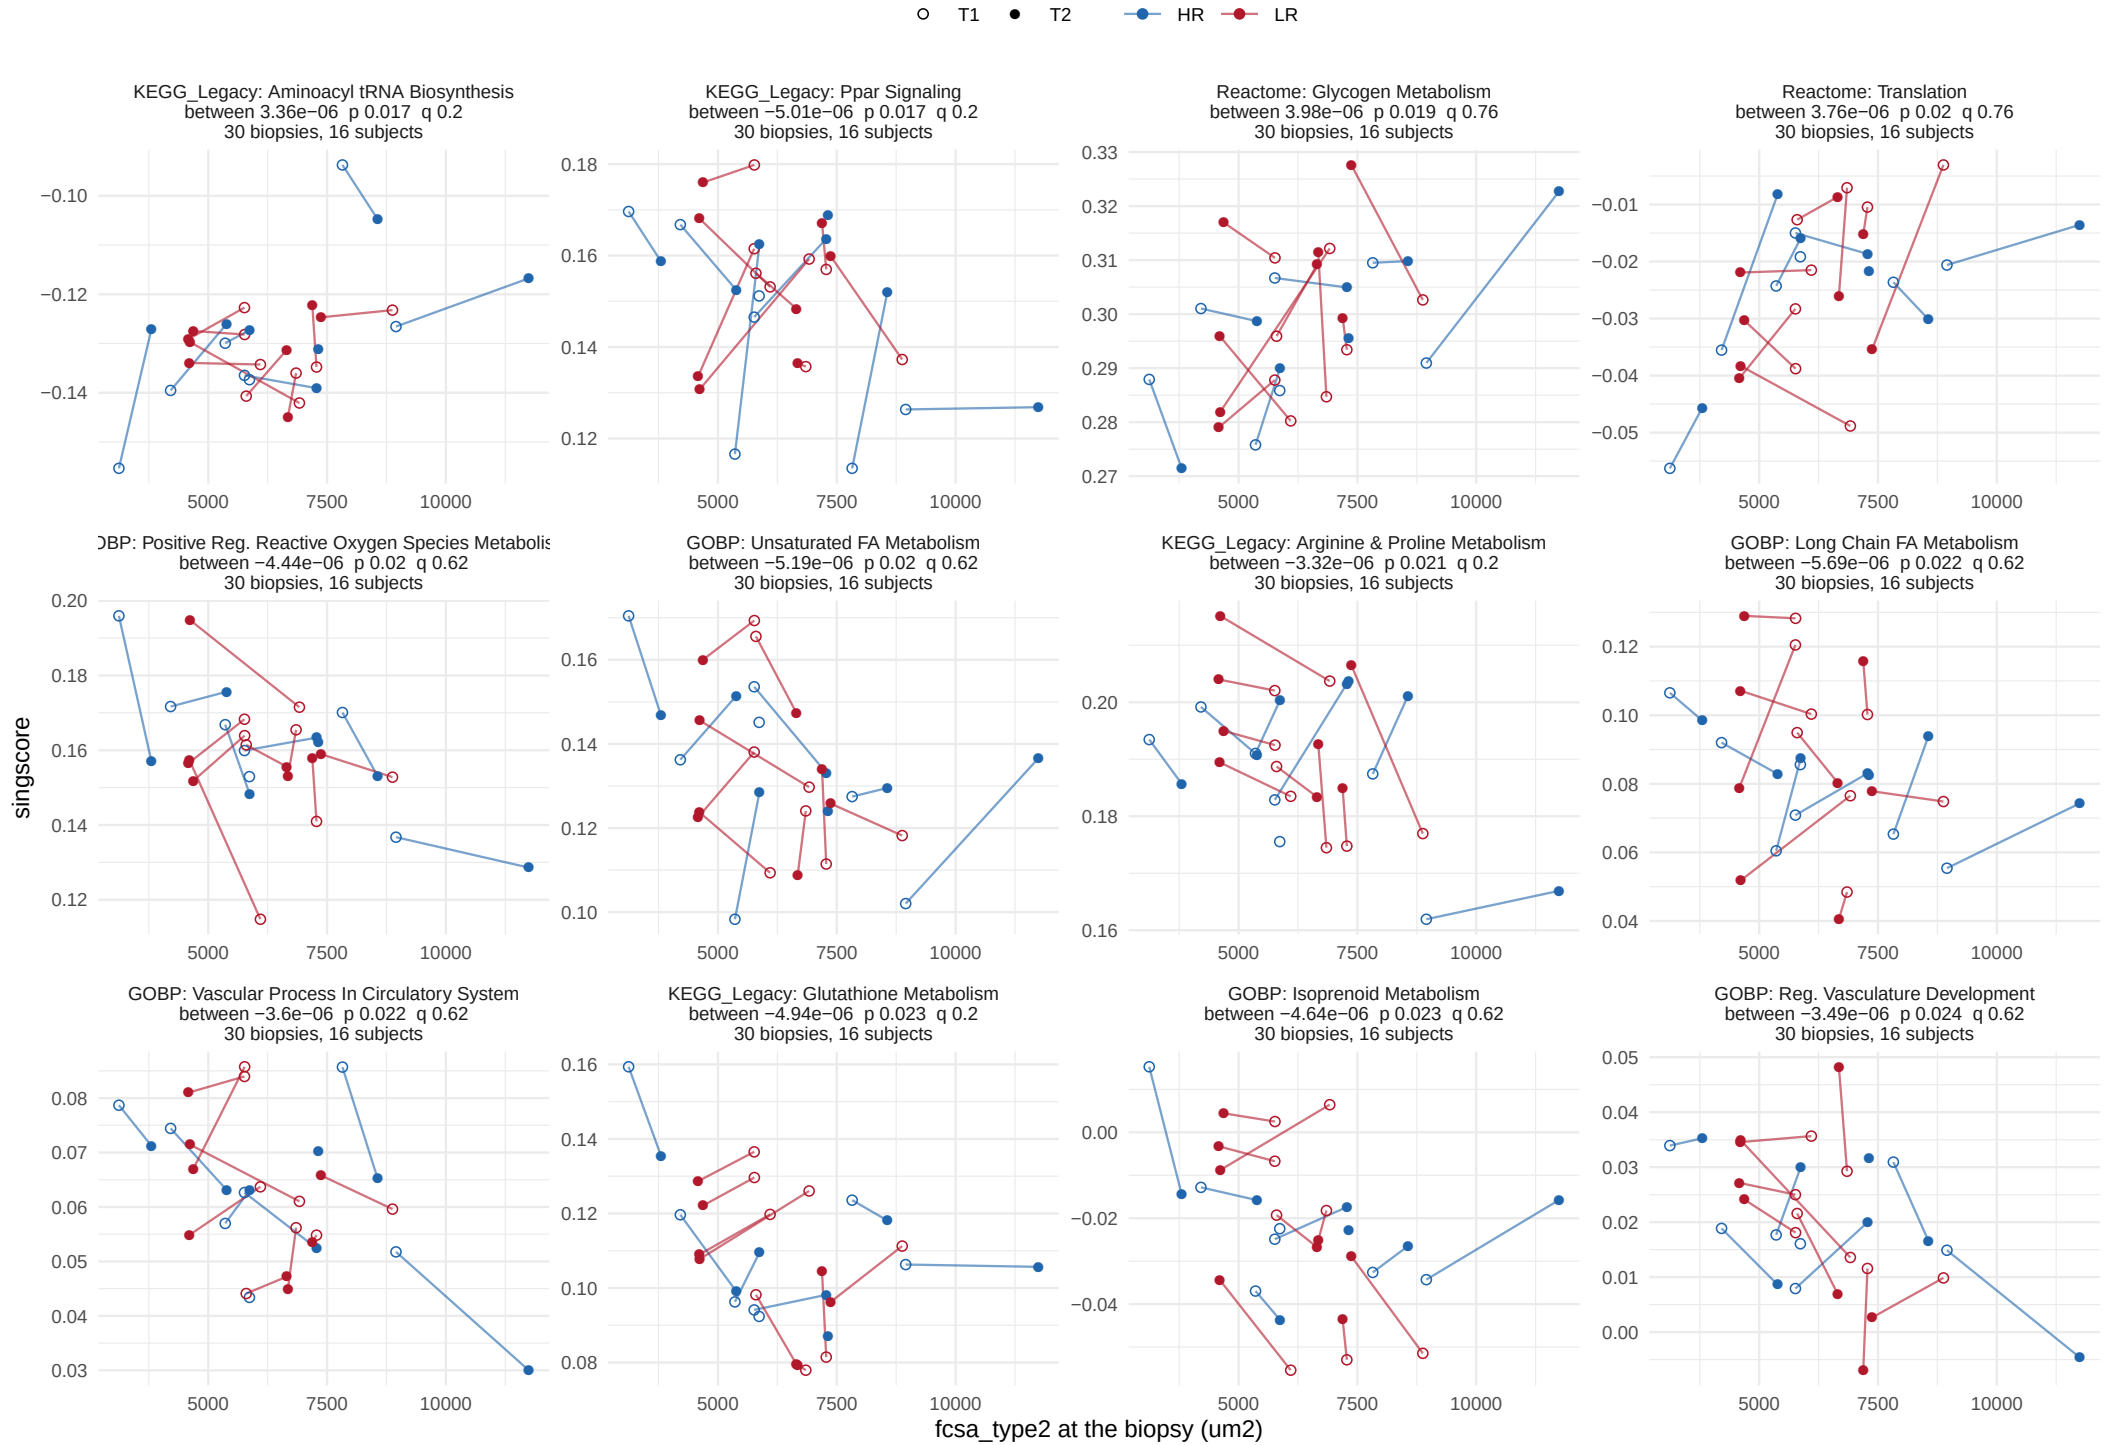

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/05_associate.xlsx, model.

fcsa_type2, between−person term


92 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 5 of 8.

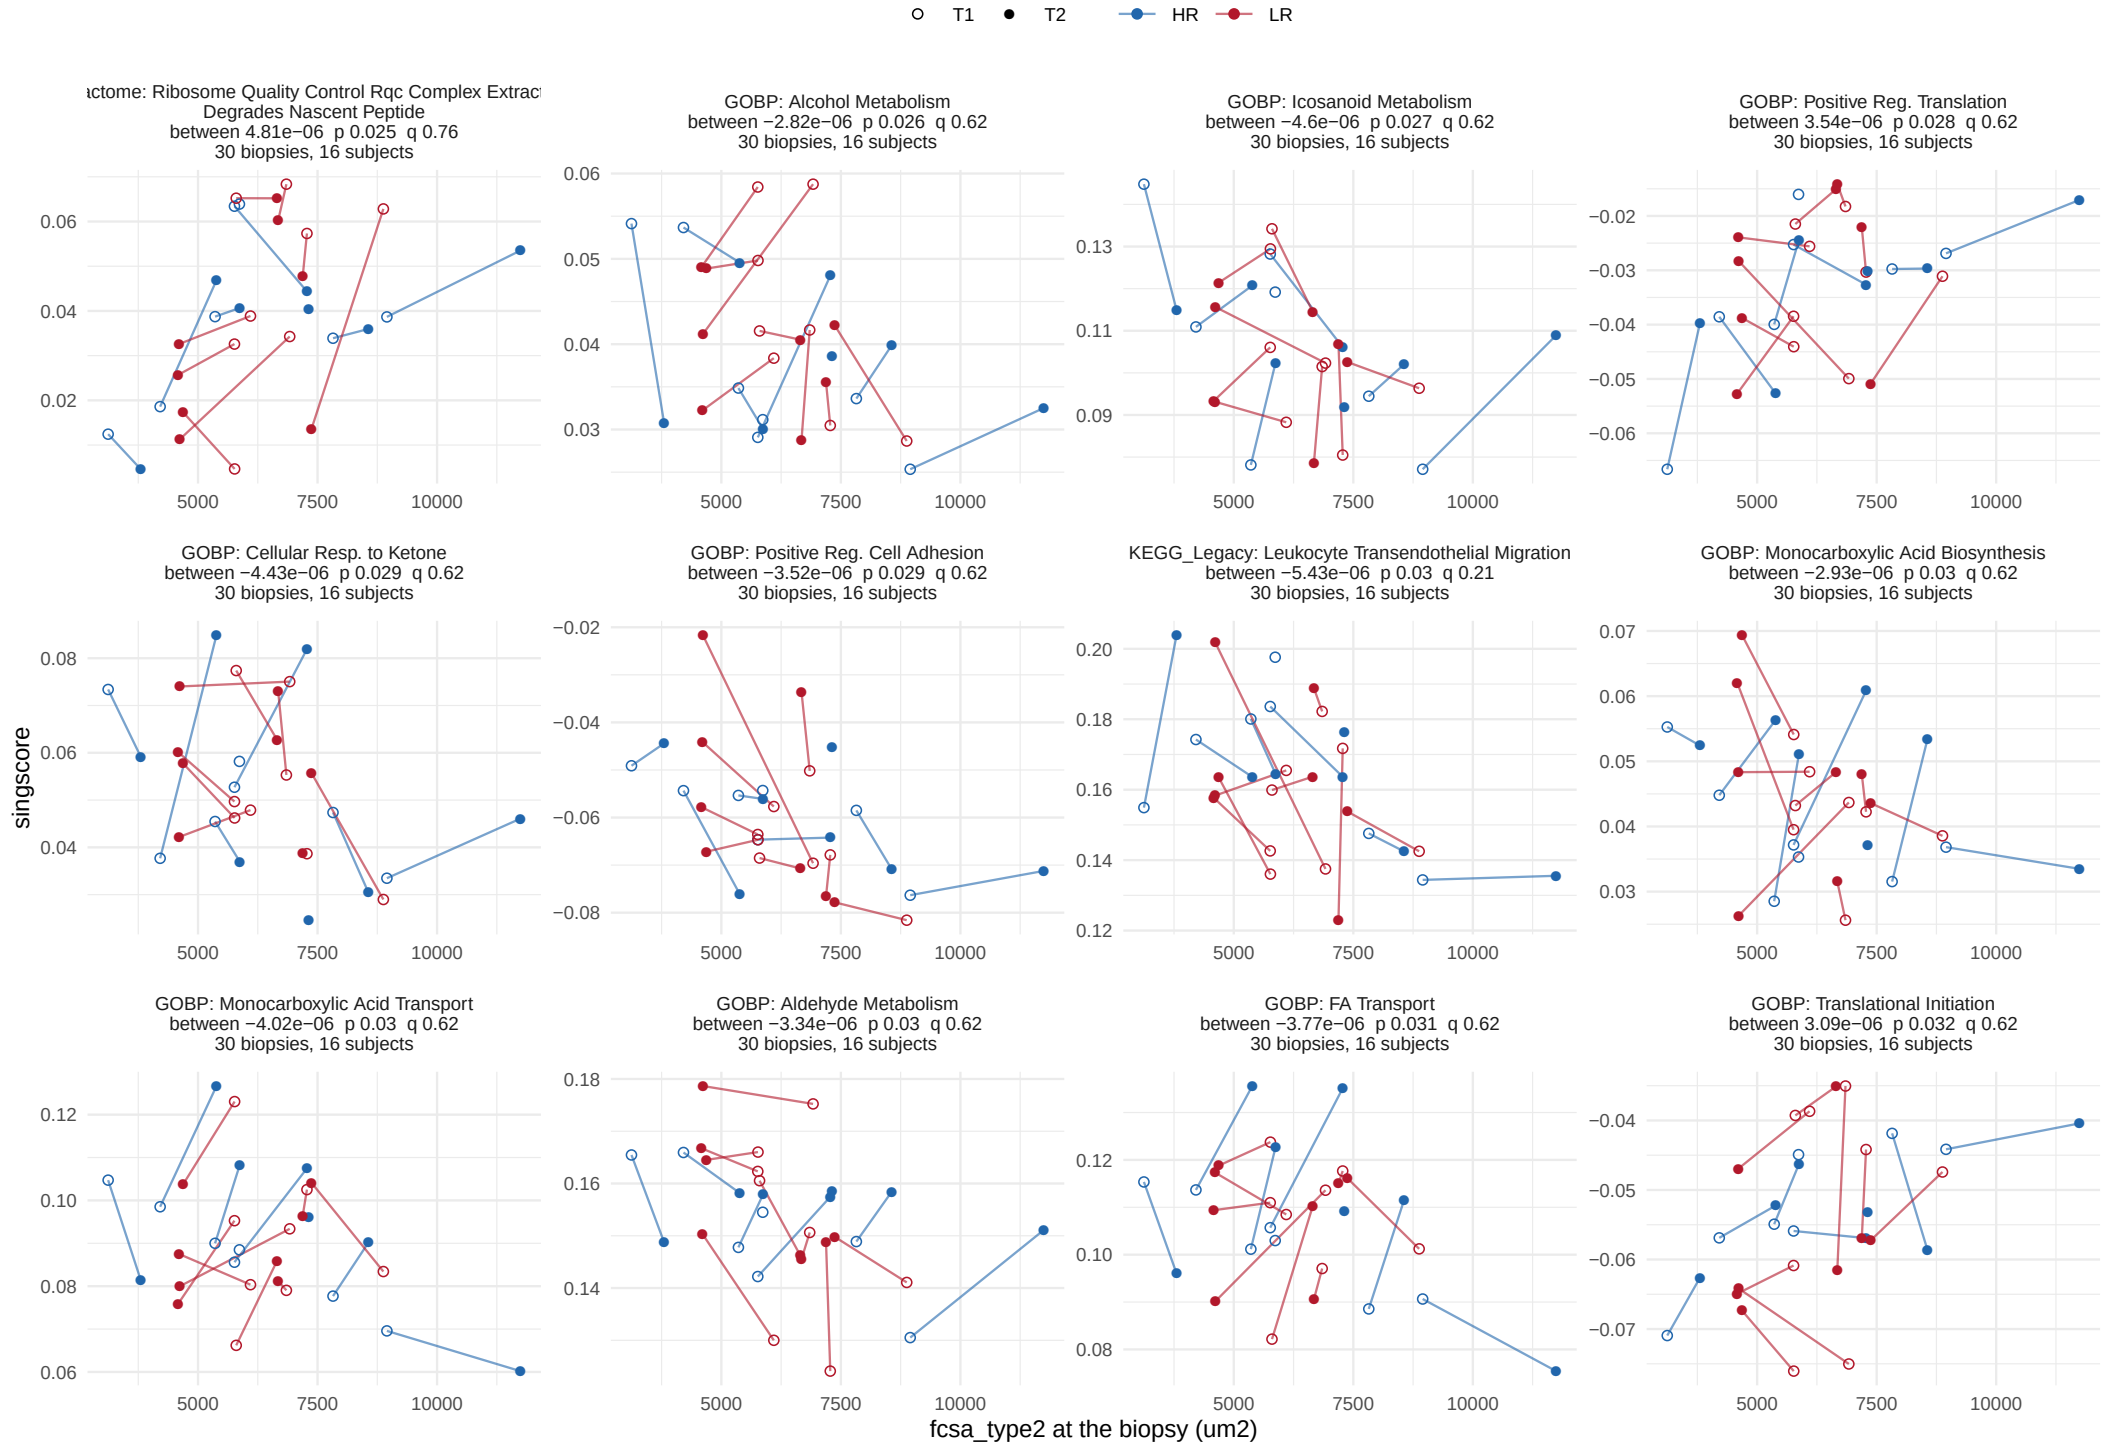

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/05_associate.xlsx, model.

fcsa_type2, between−person term


92 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 6 of 8.

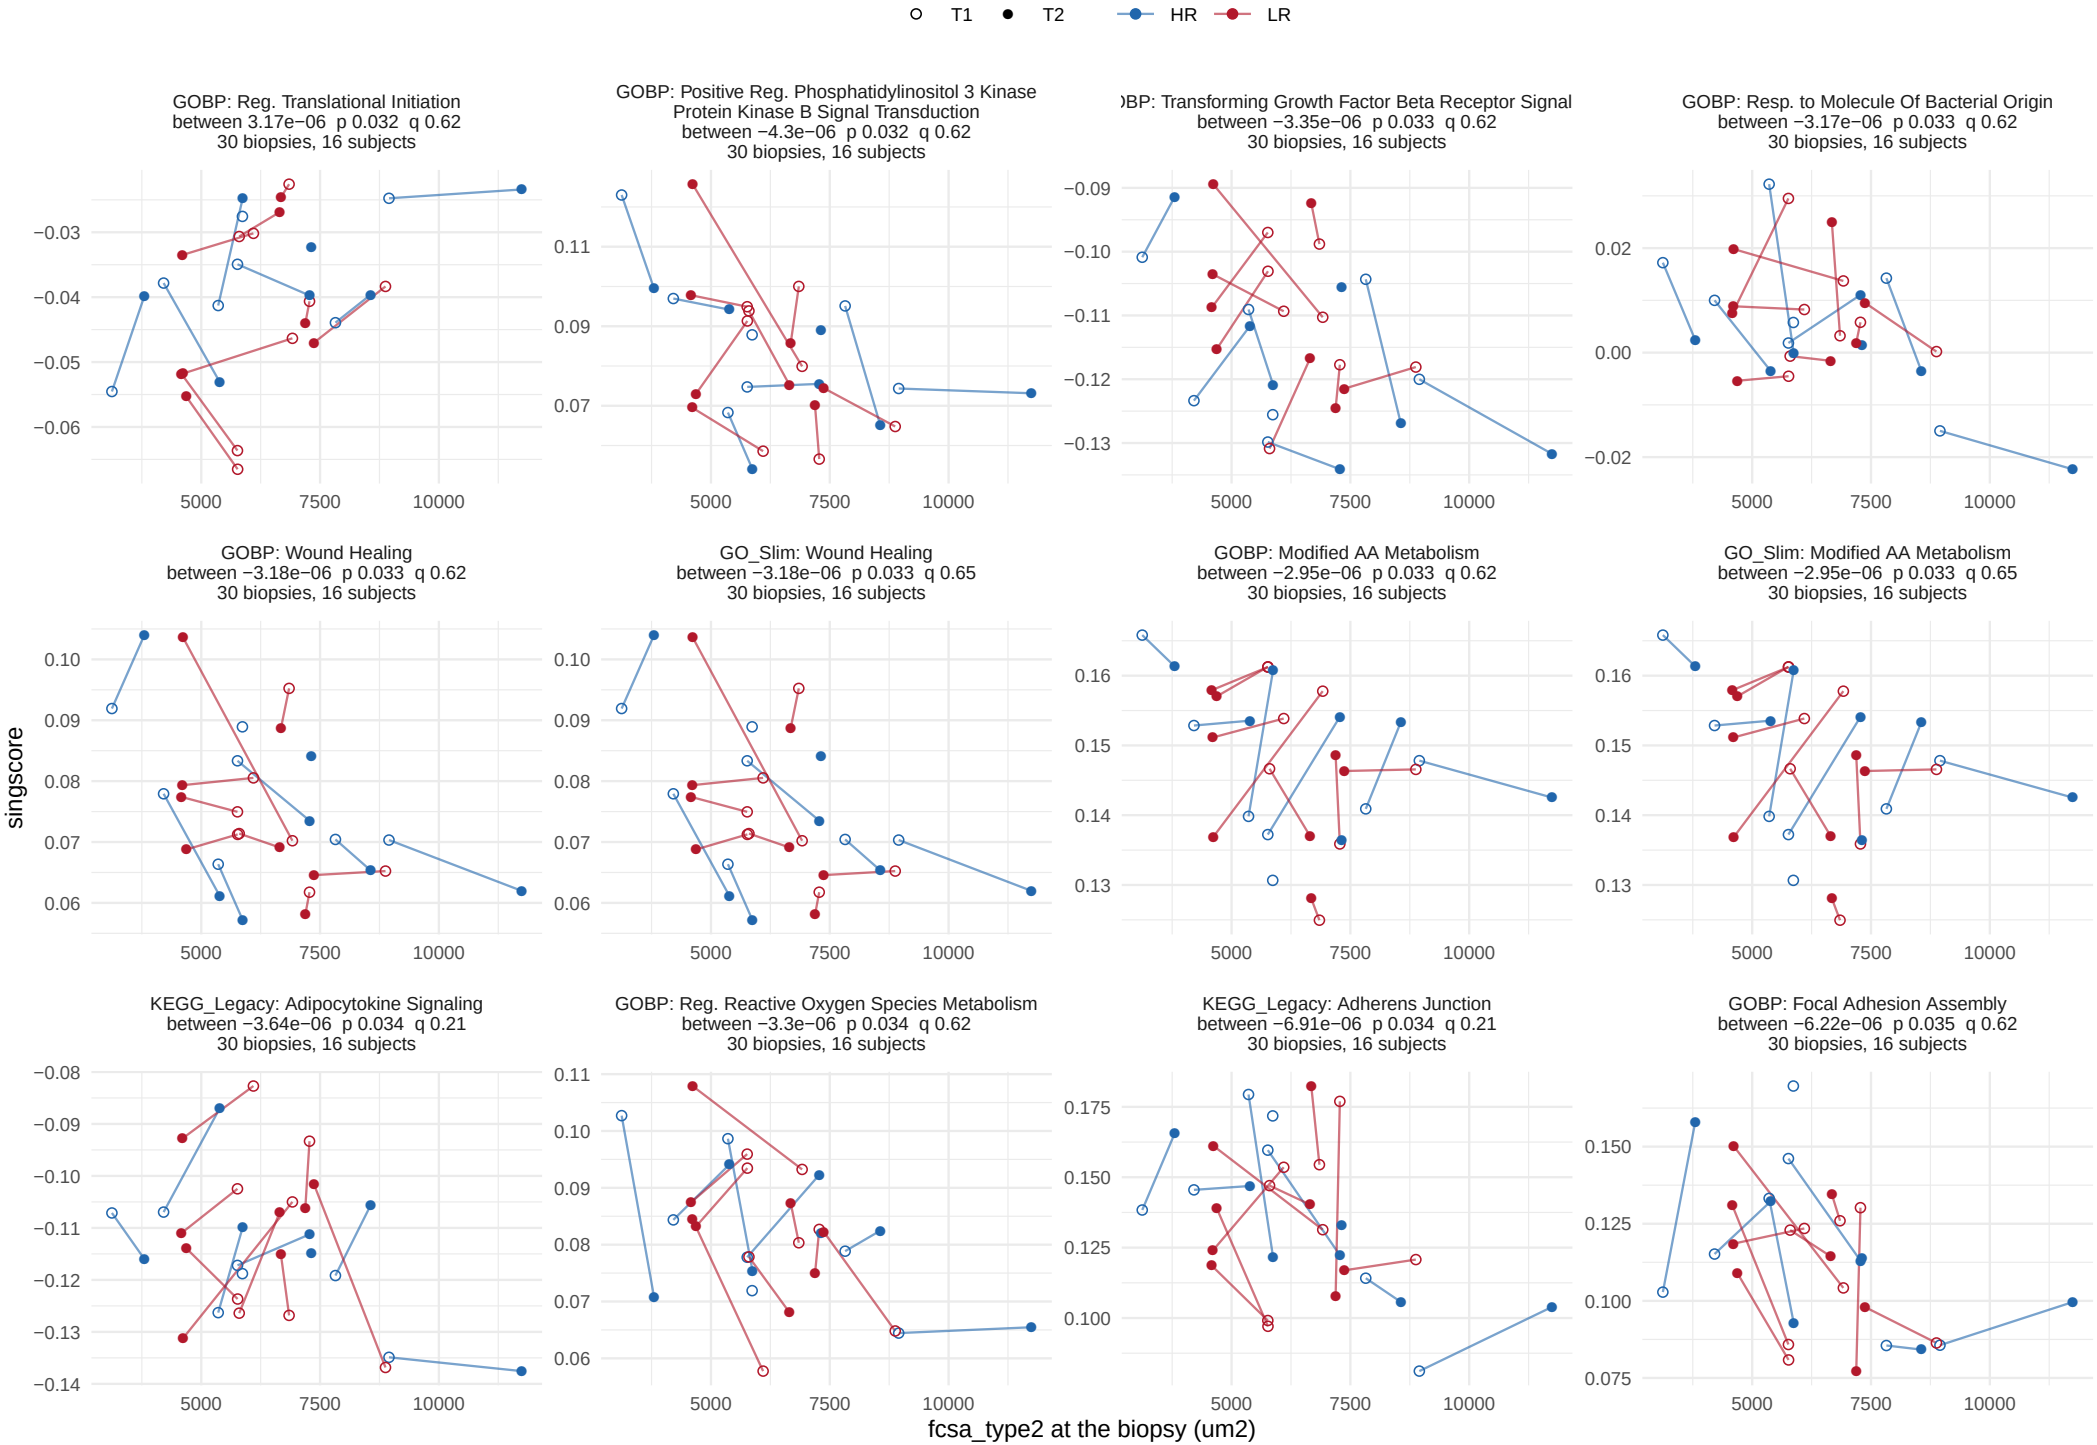

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/05_associate.xlsx, model.

fcsa_type2, between−person term


92 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 7 of 8.

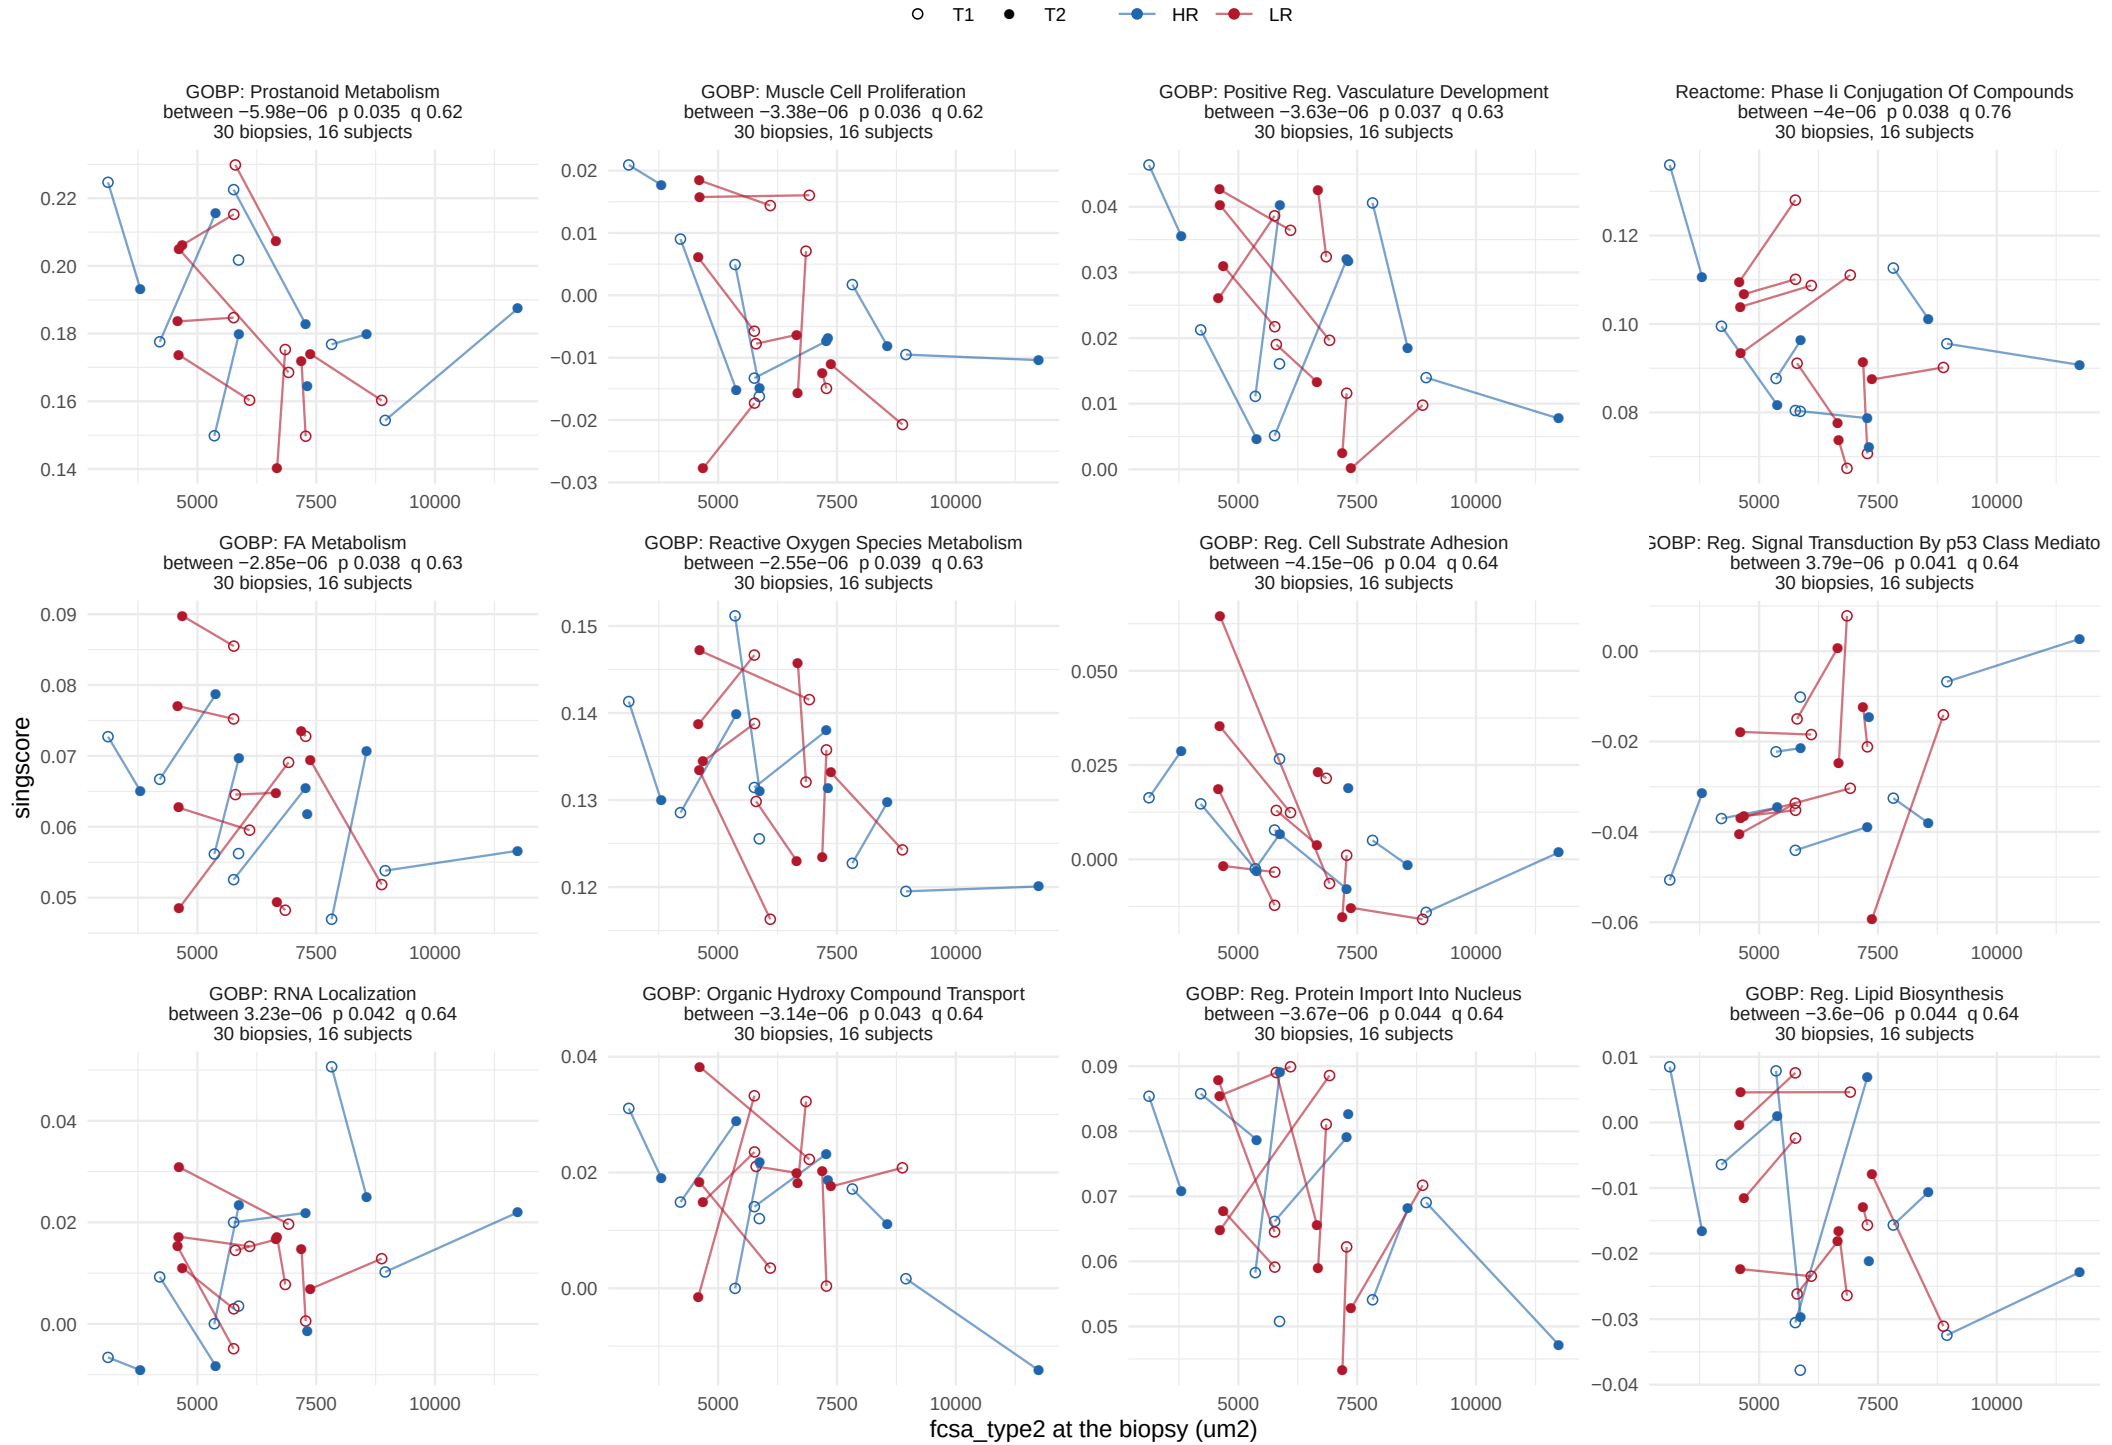

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/05_associate.xlsx, model.

fcsa_type2, between−person term


92 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 8 of 8.

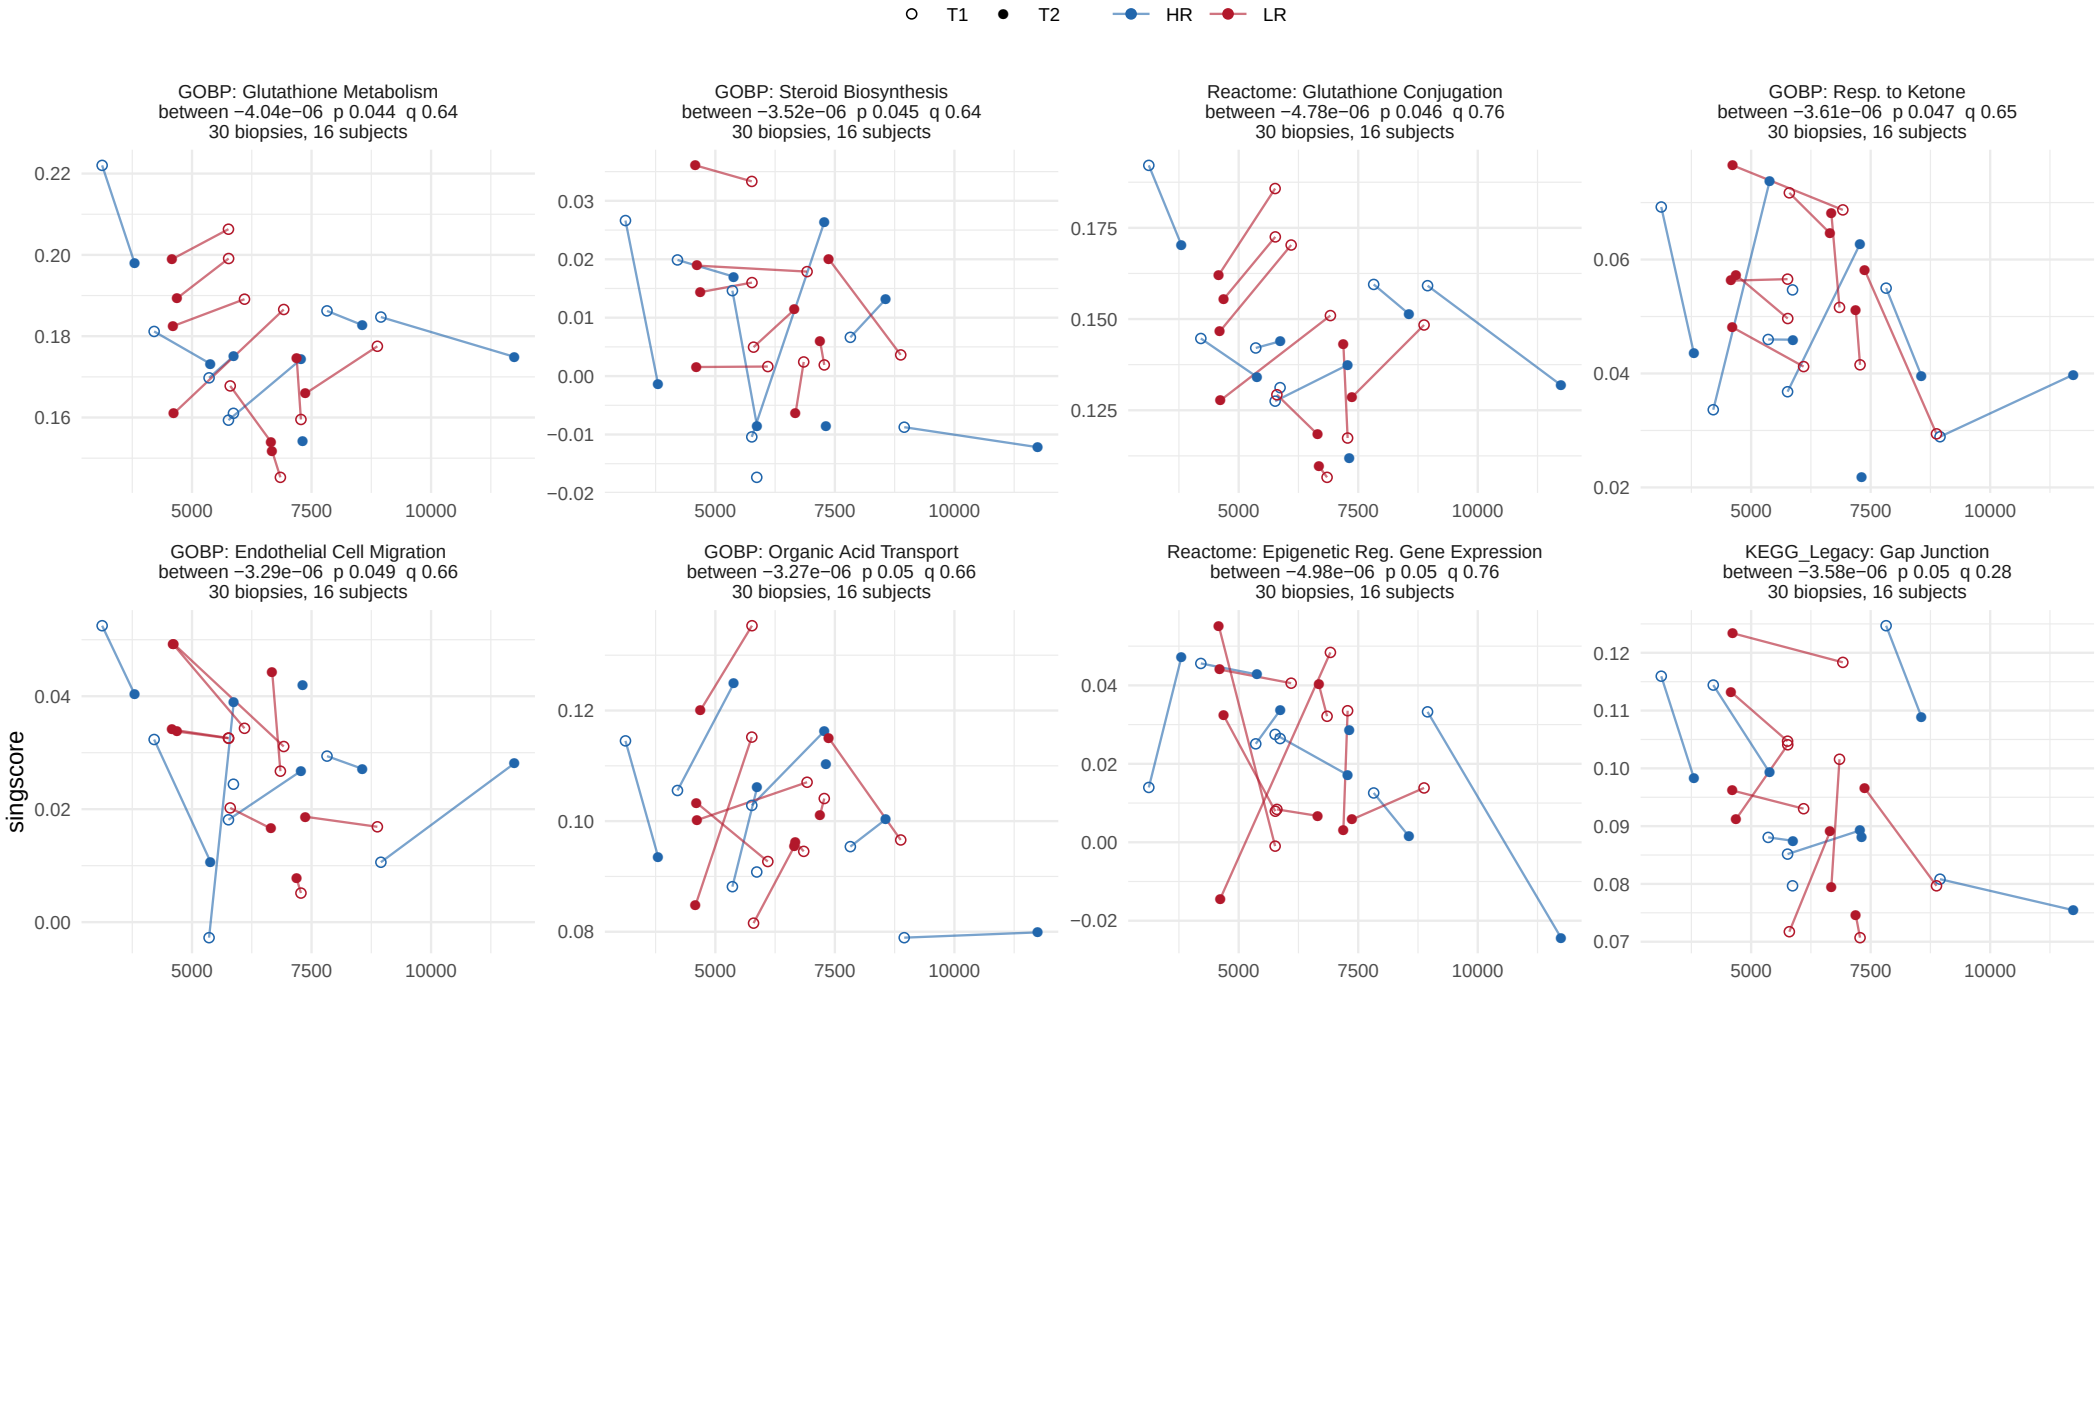

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/05_associate.xlsx, model.

mcsa, within−person term


47 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 1 of 4.

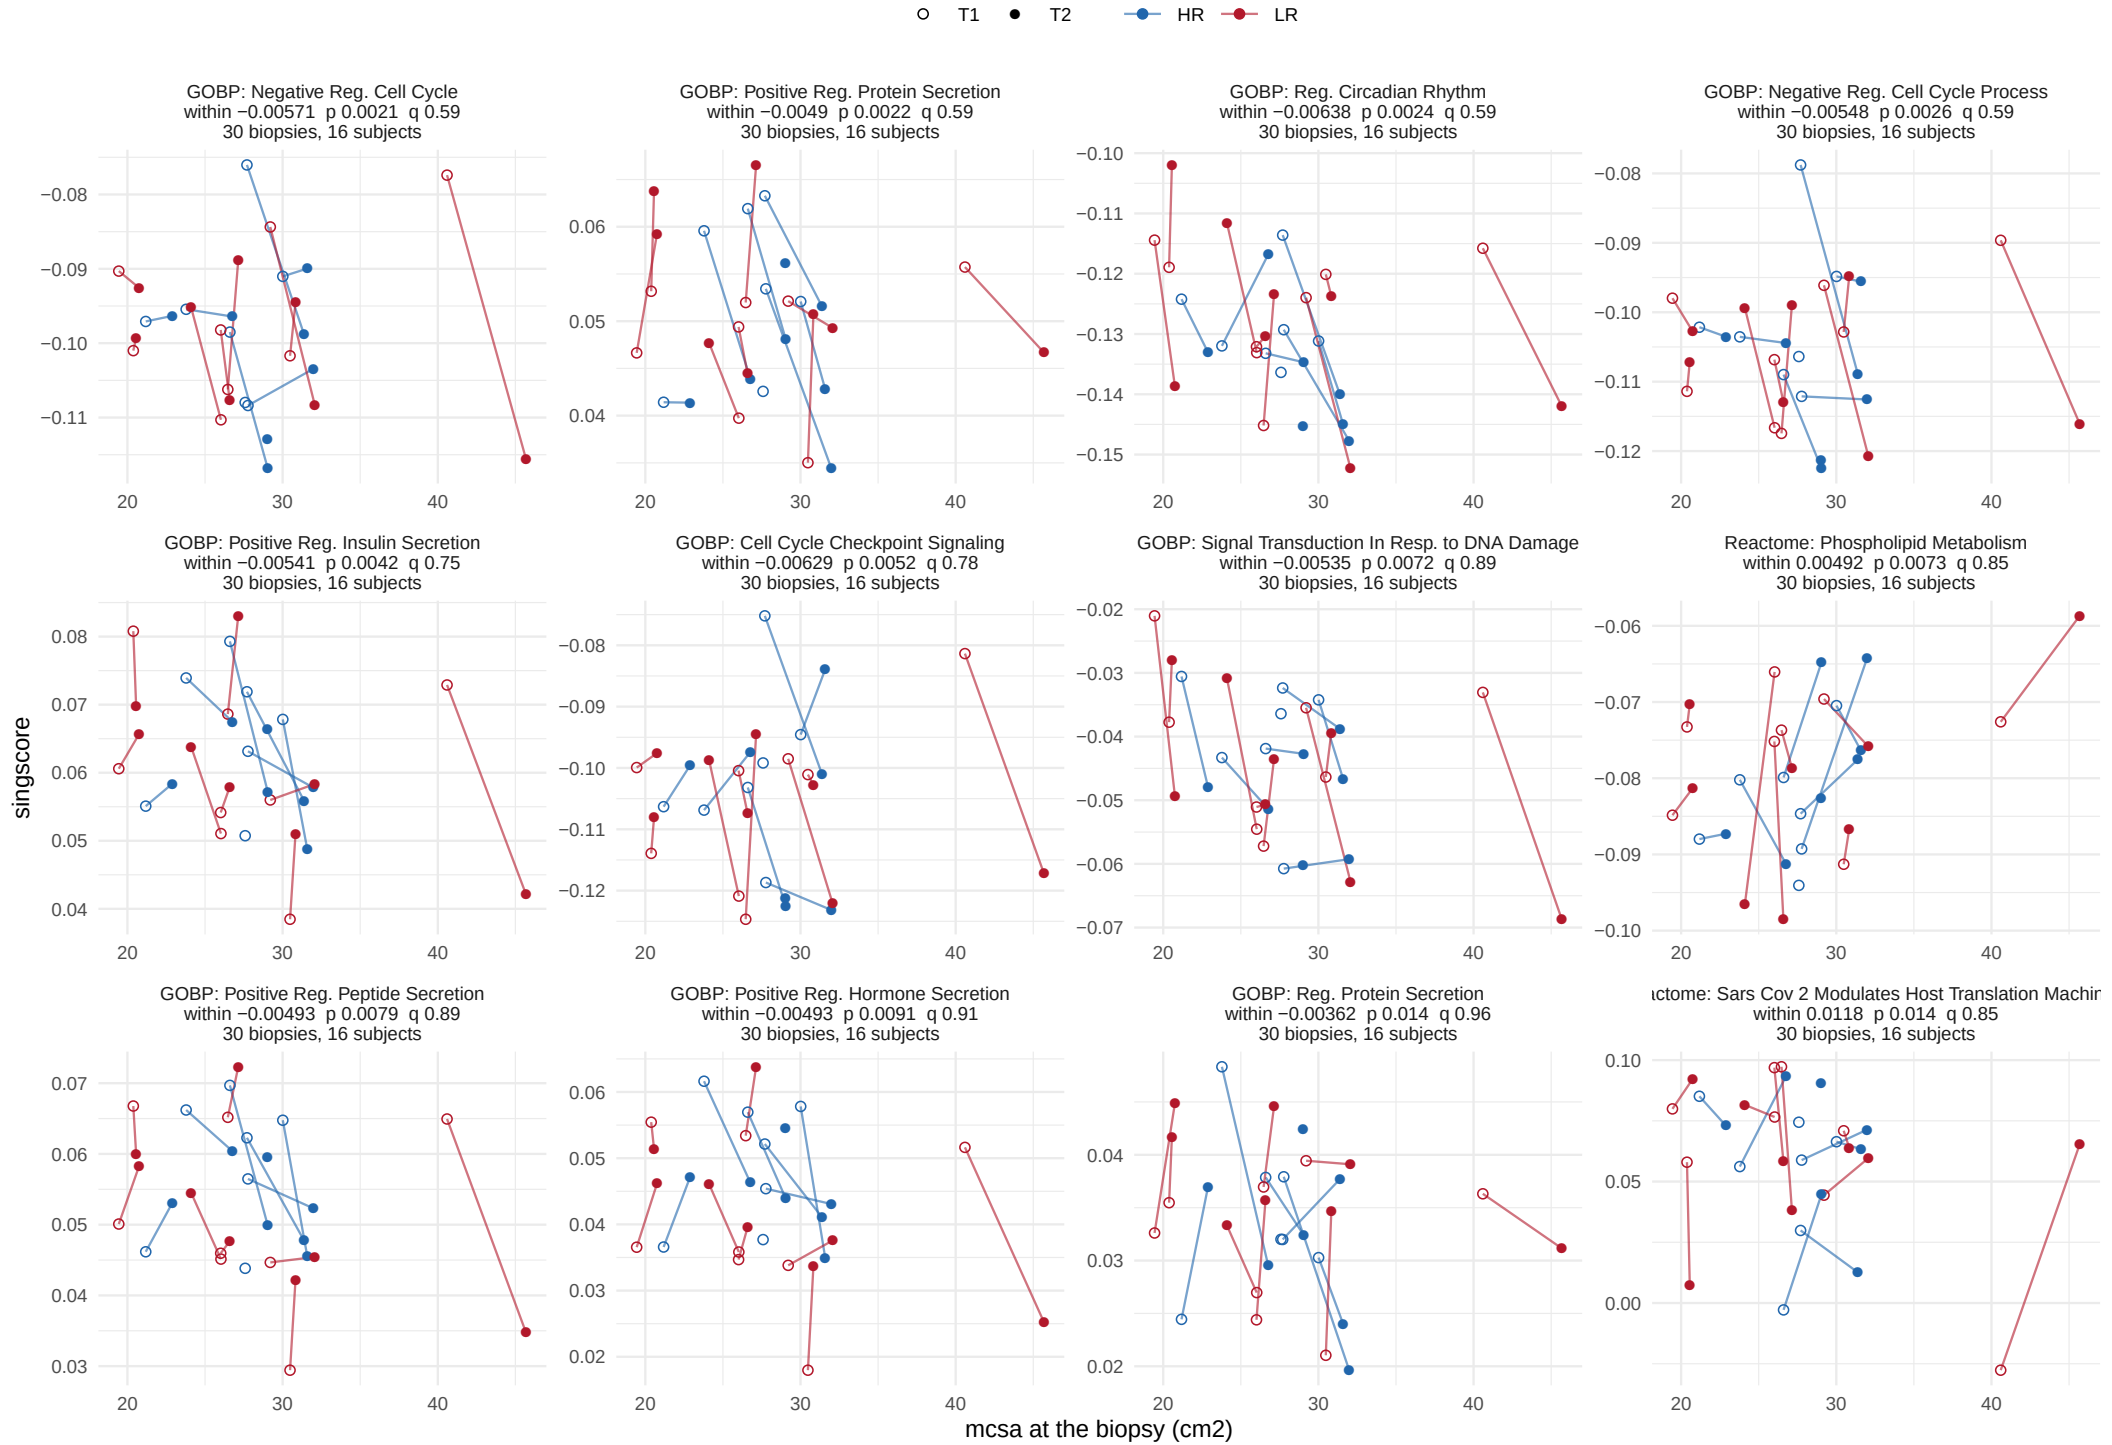

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/05_associate.xlsx, model.

mcsa, within−person term


47 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 2 of 4.

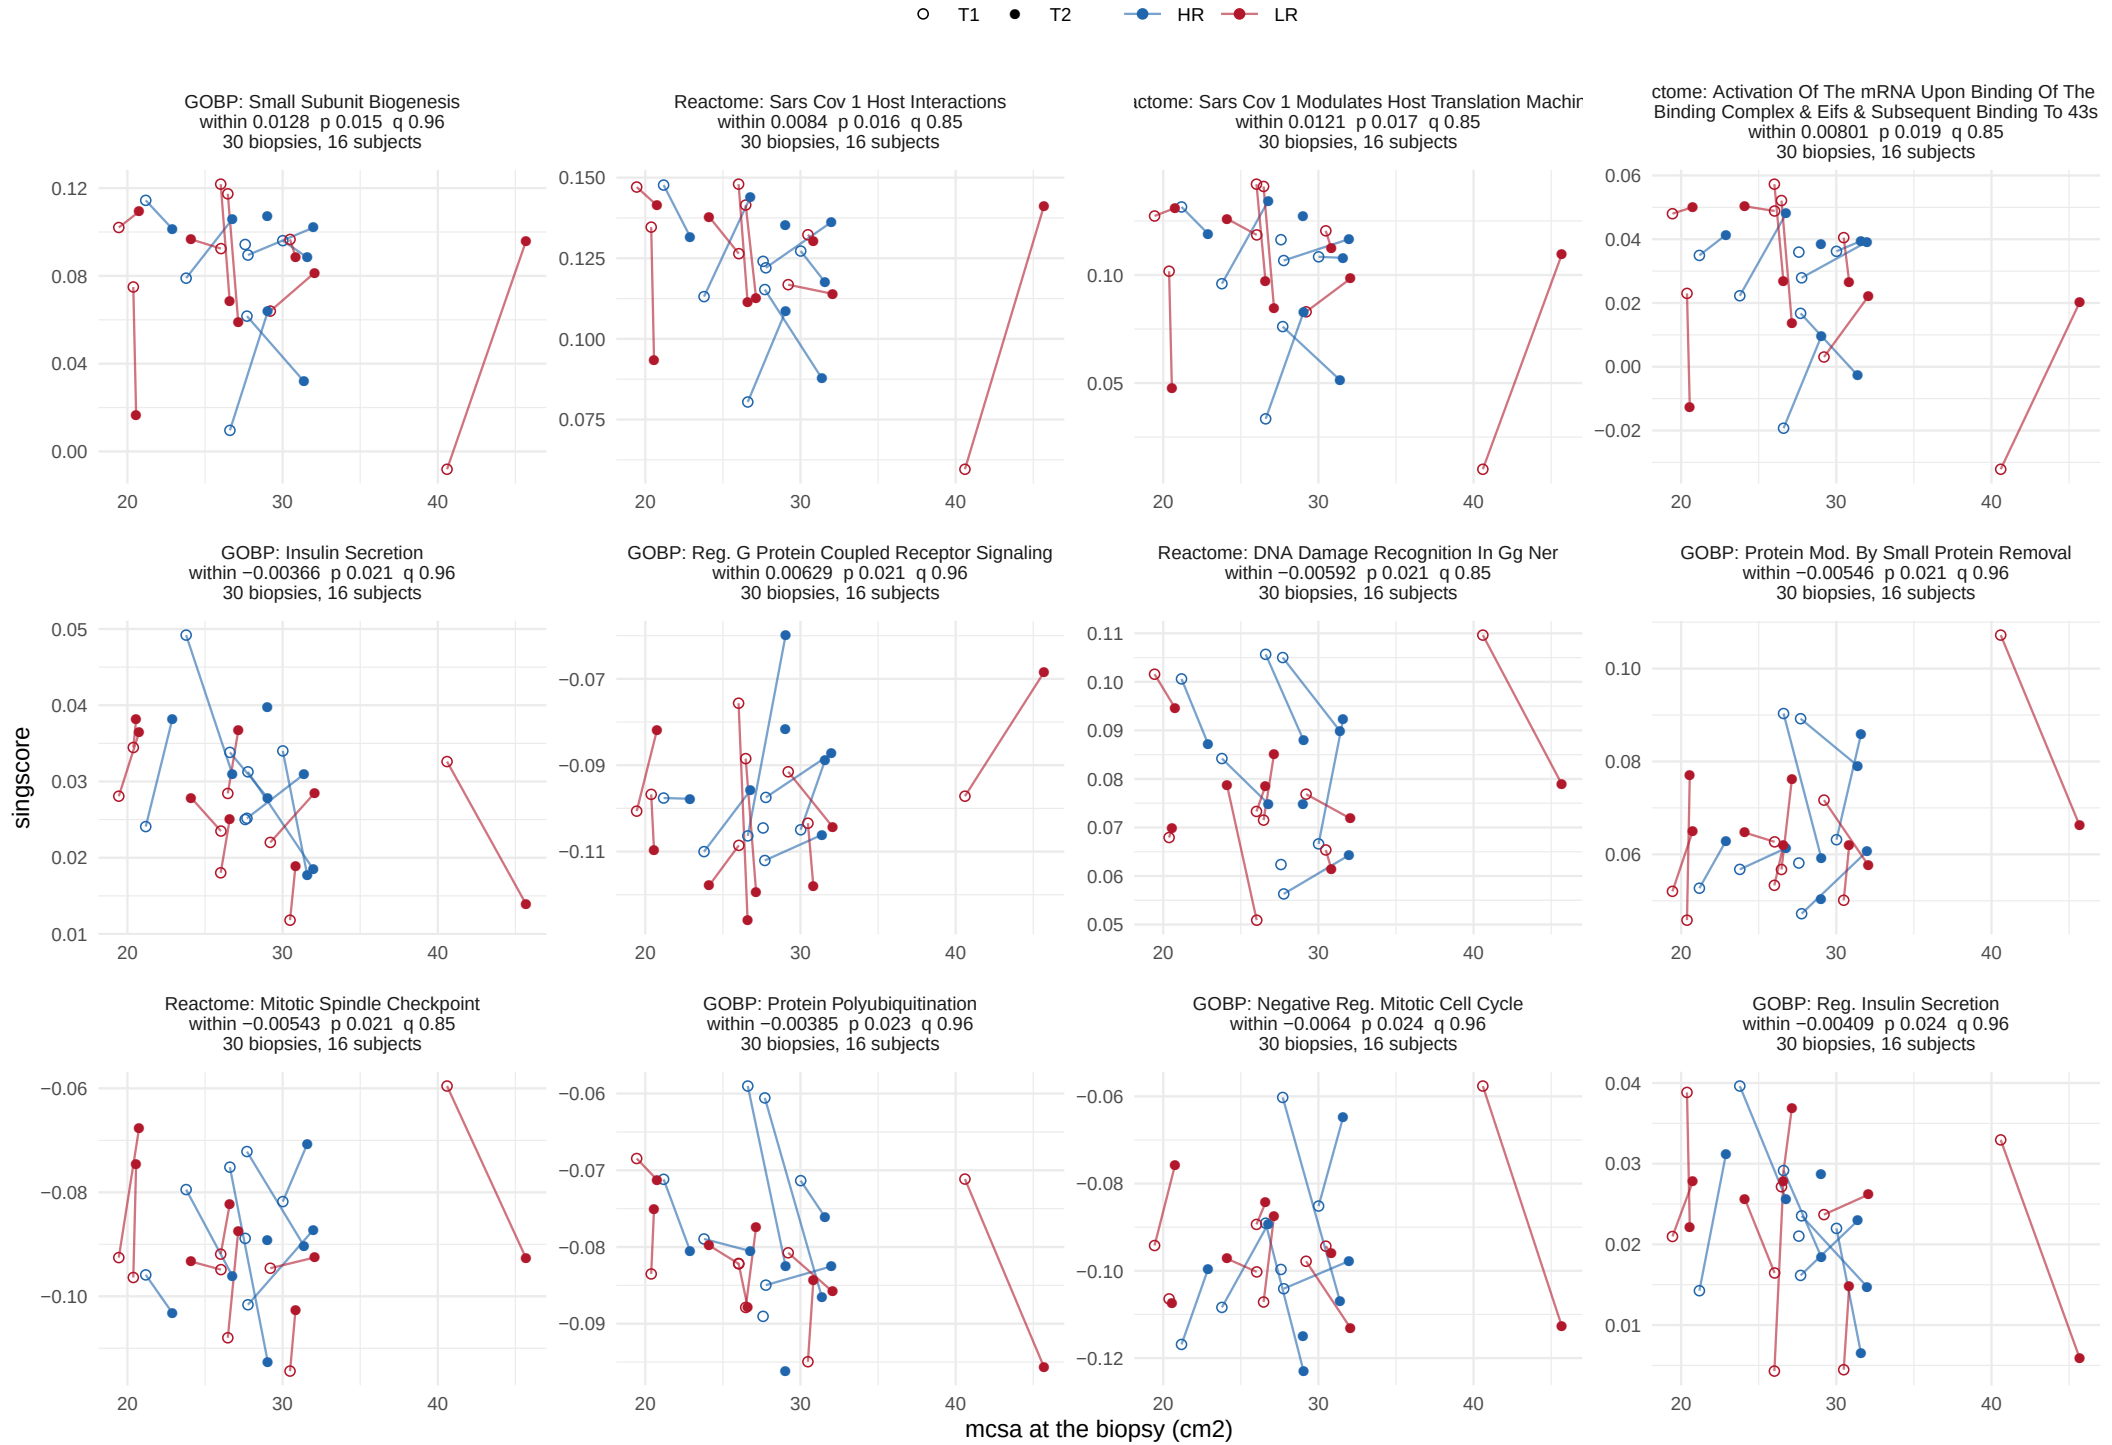

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/05_associate.xlsx, model.

mcsa, within−person term


47 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 3 of 4.

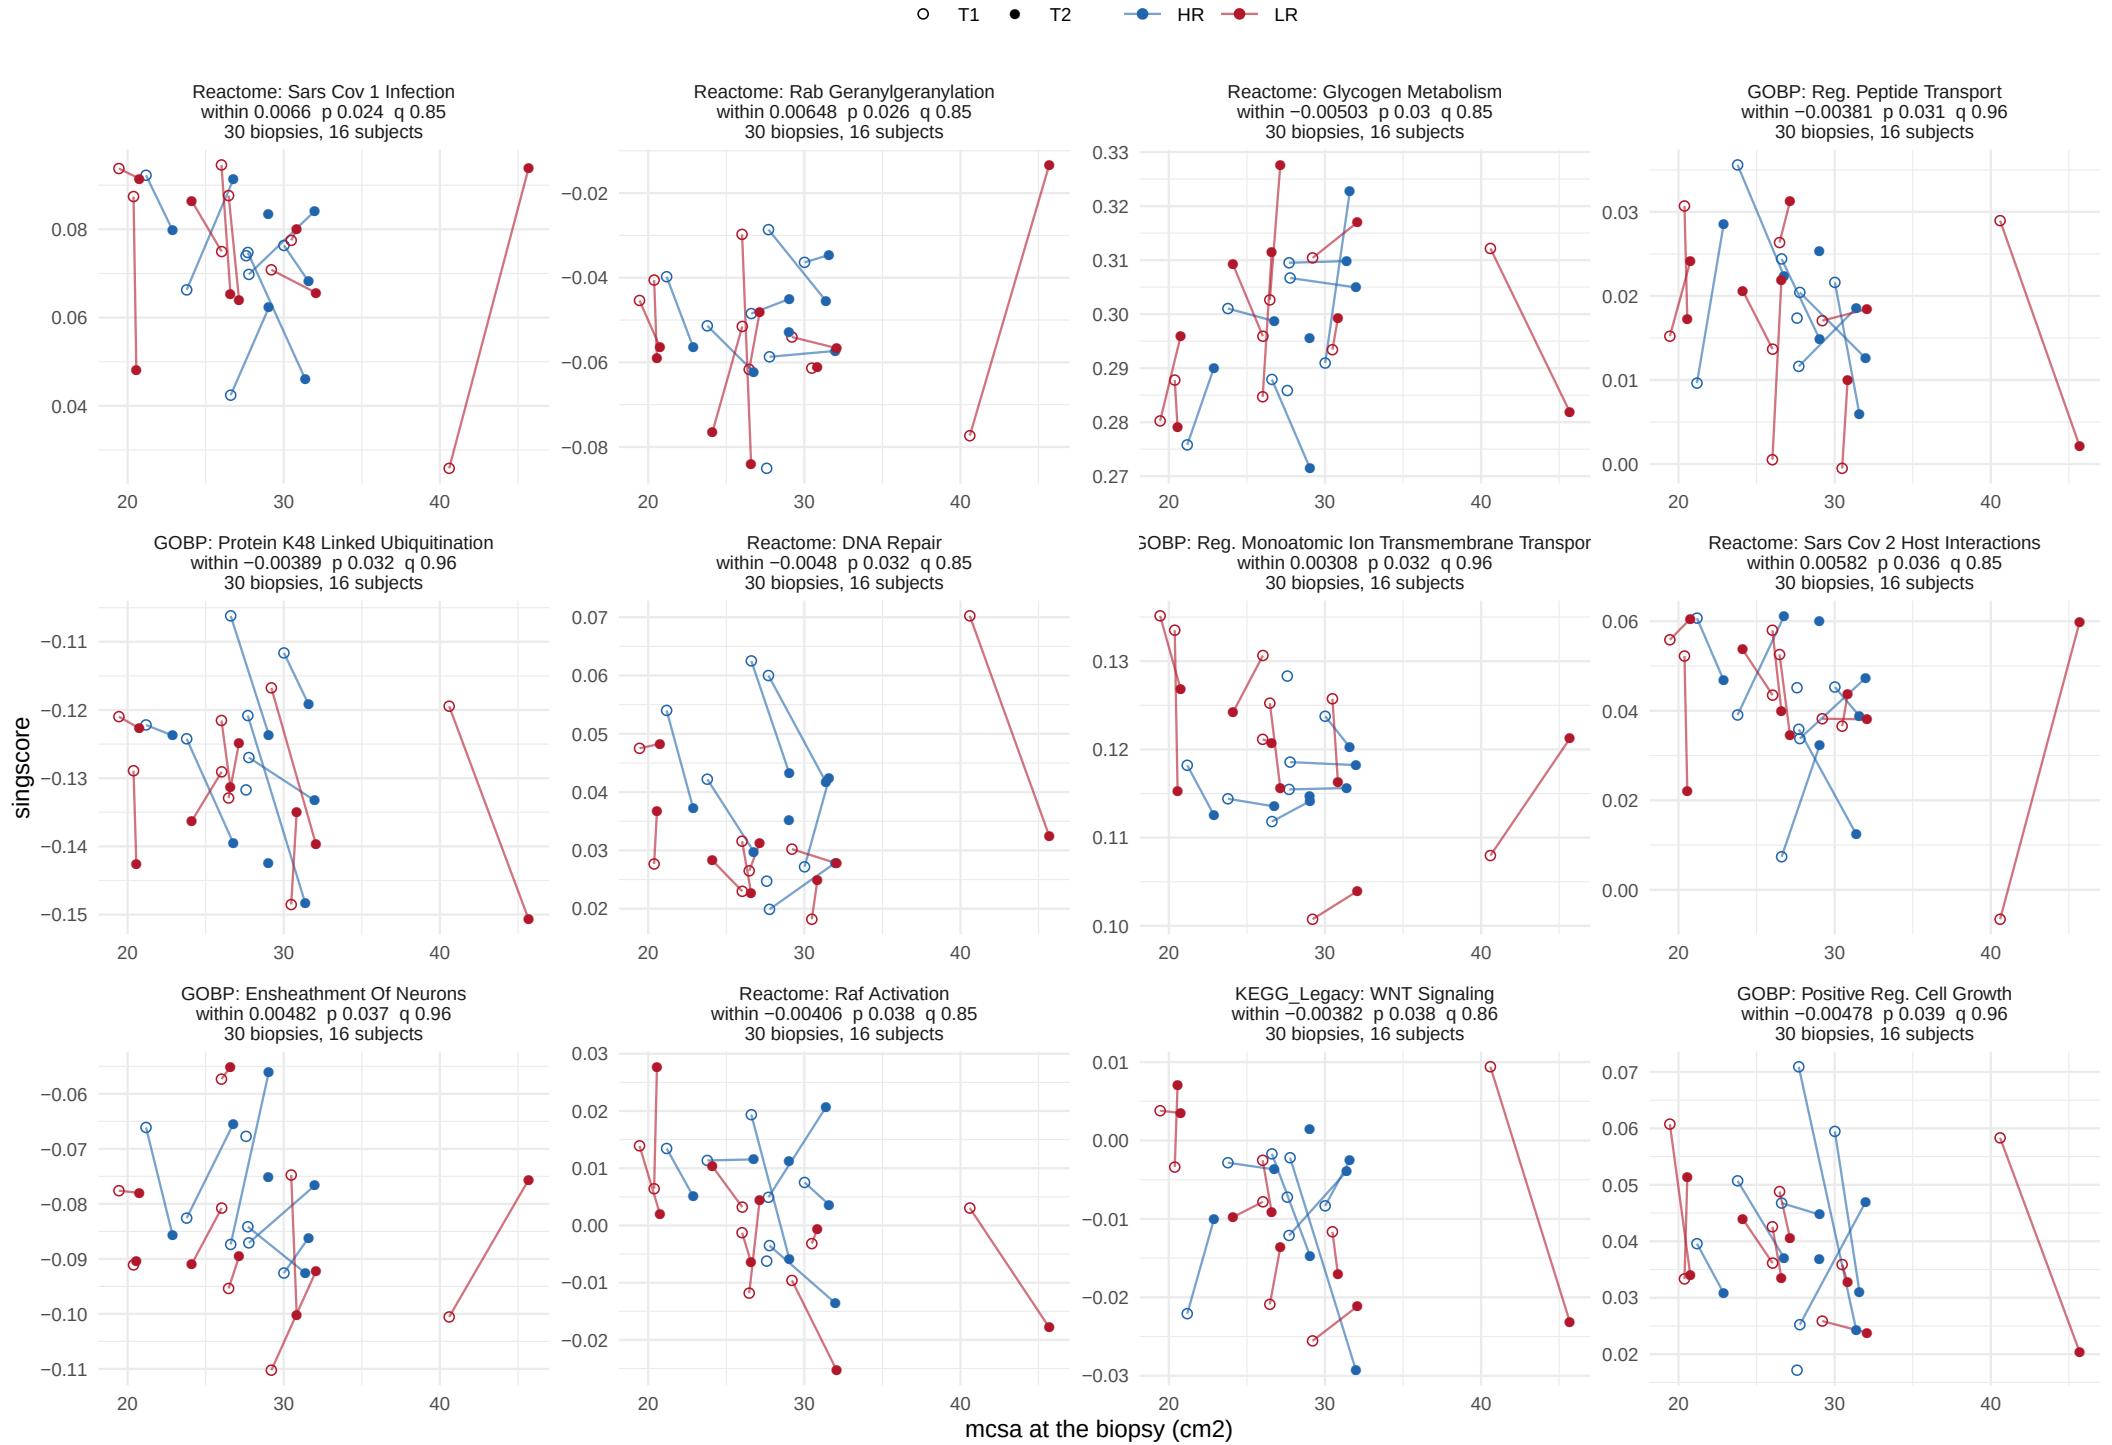

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/05_associate.xlsx, model.

mcsa, within−person term


47 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 4 of 4.

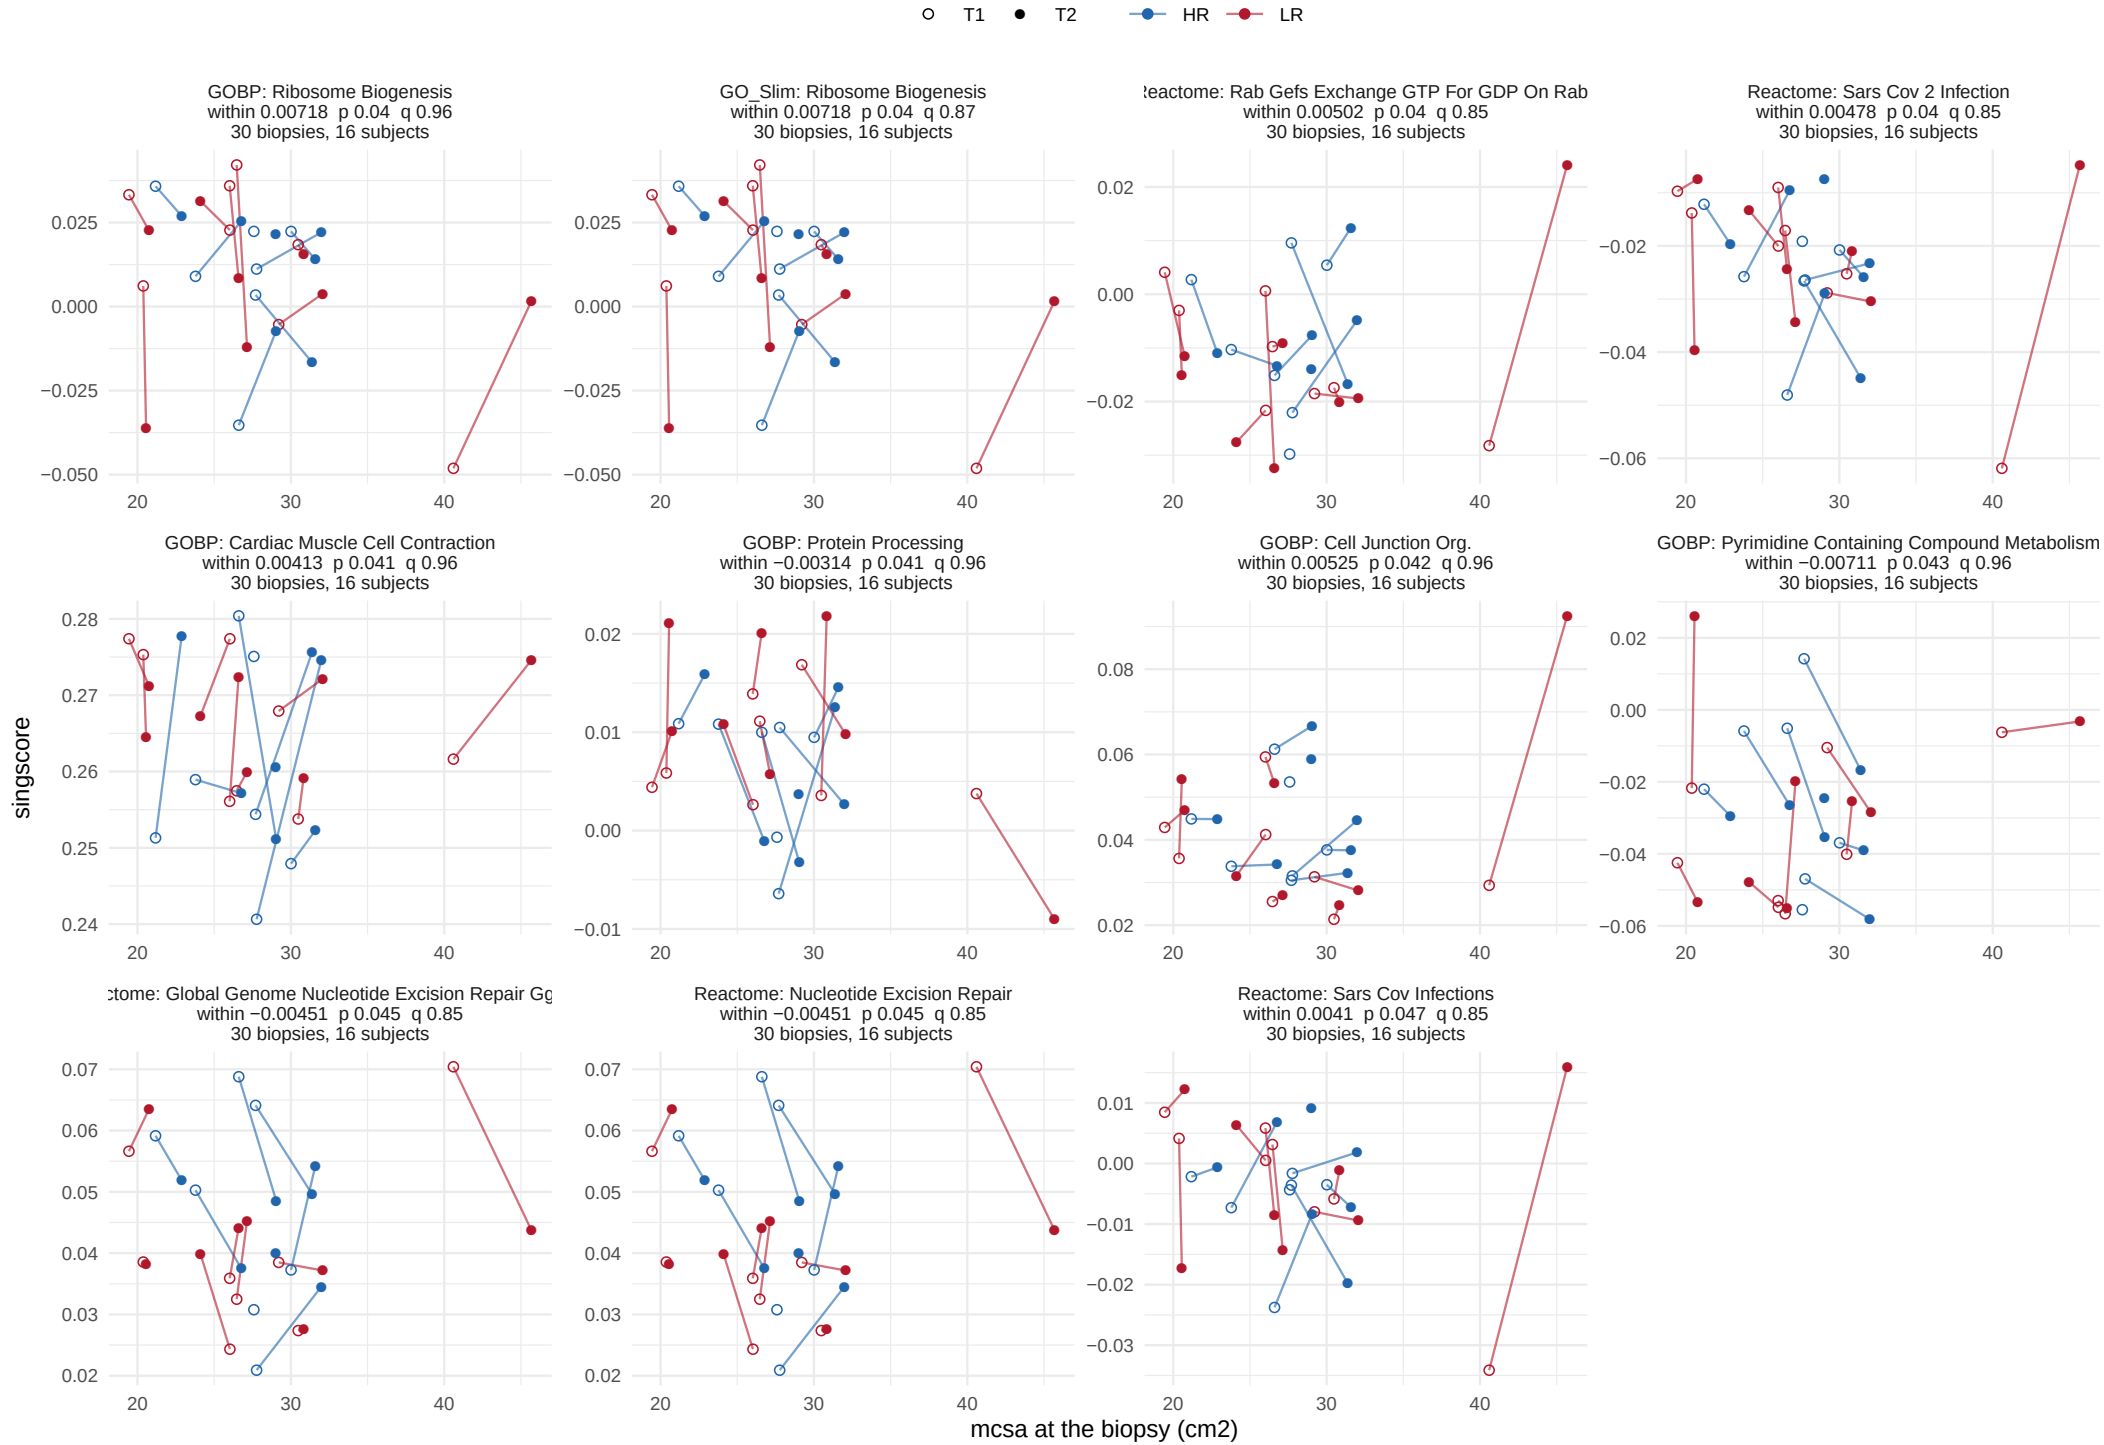

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/05_associate.xlsx, model.

mcsa, between−person term


74 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 1 of 7.

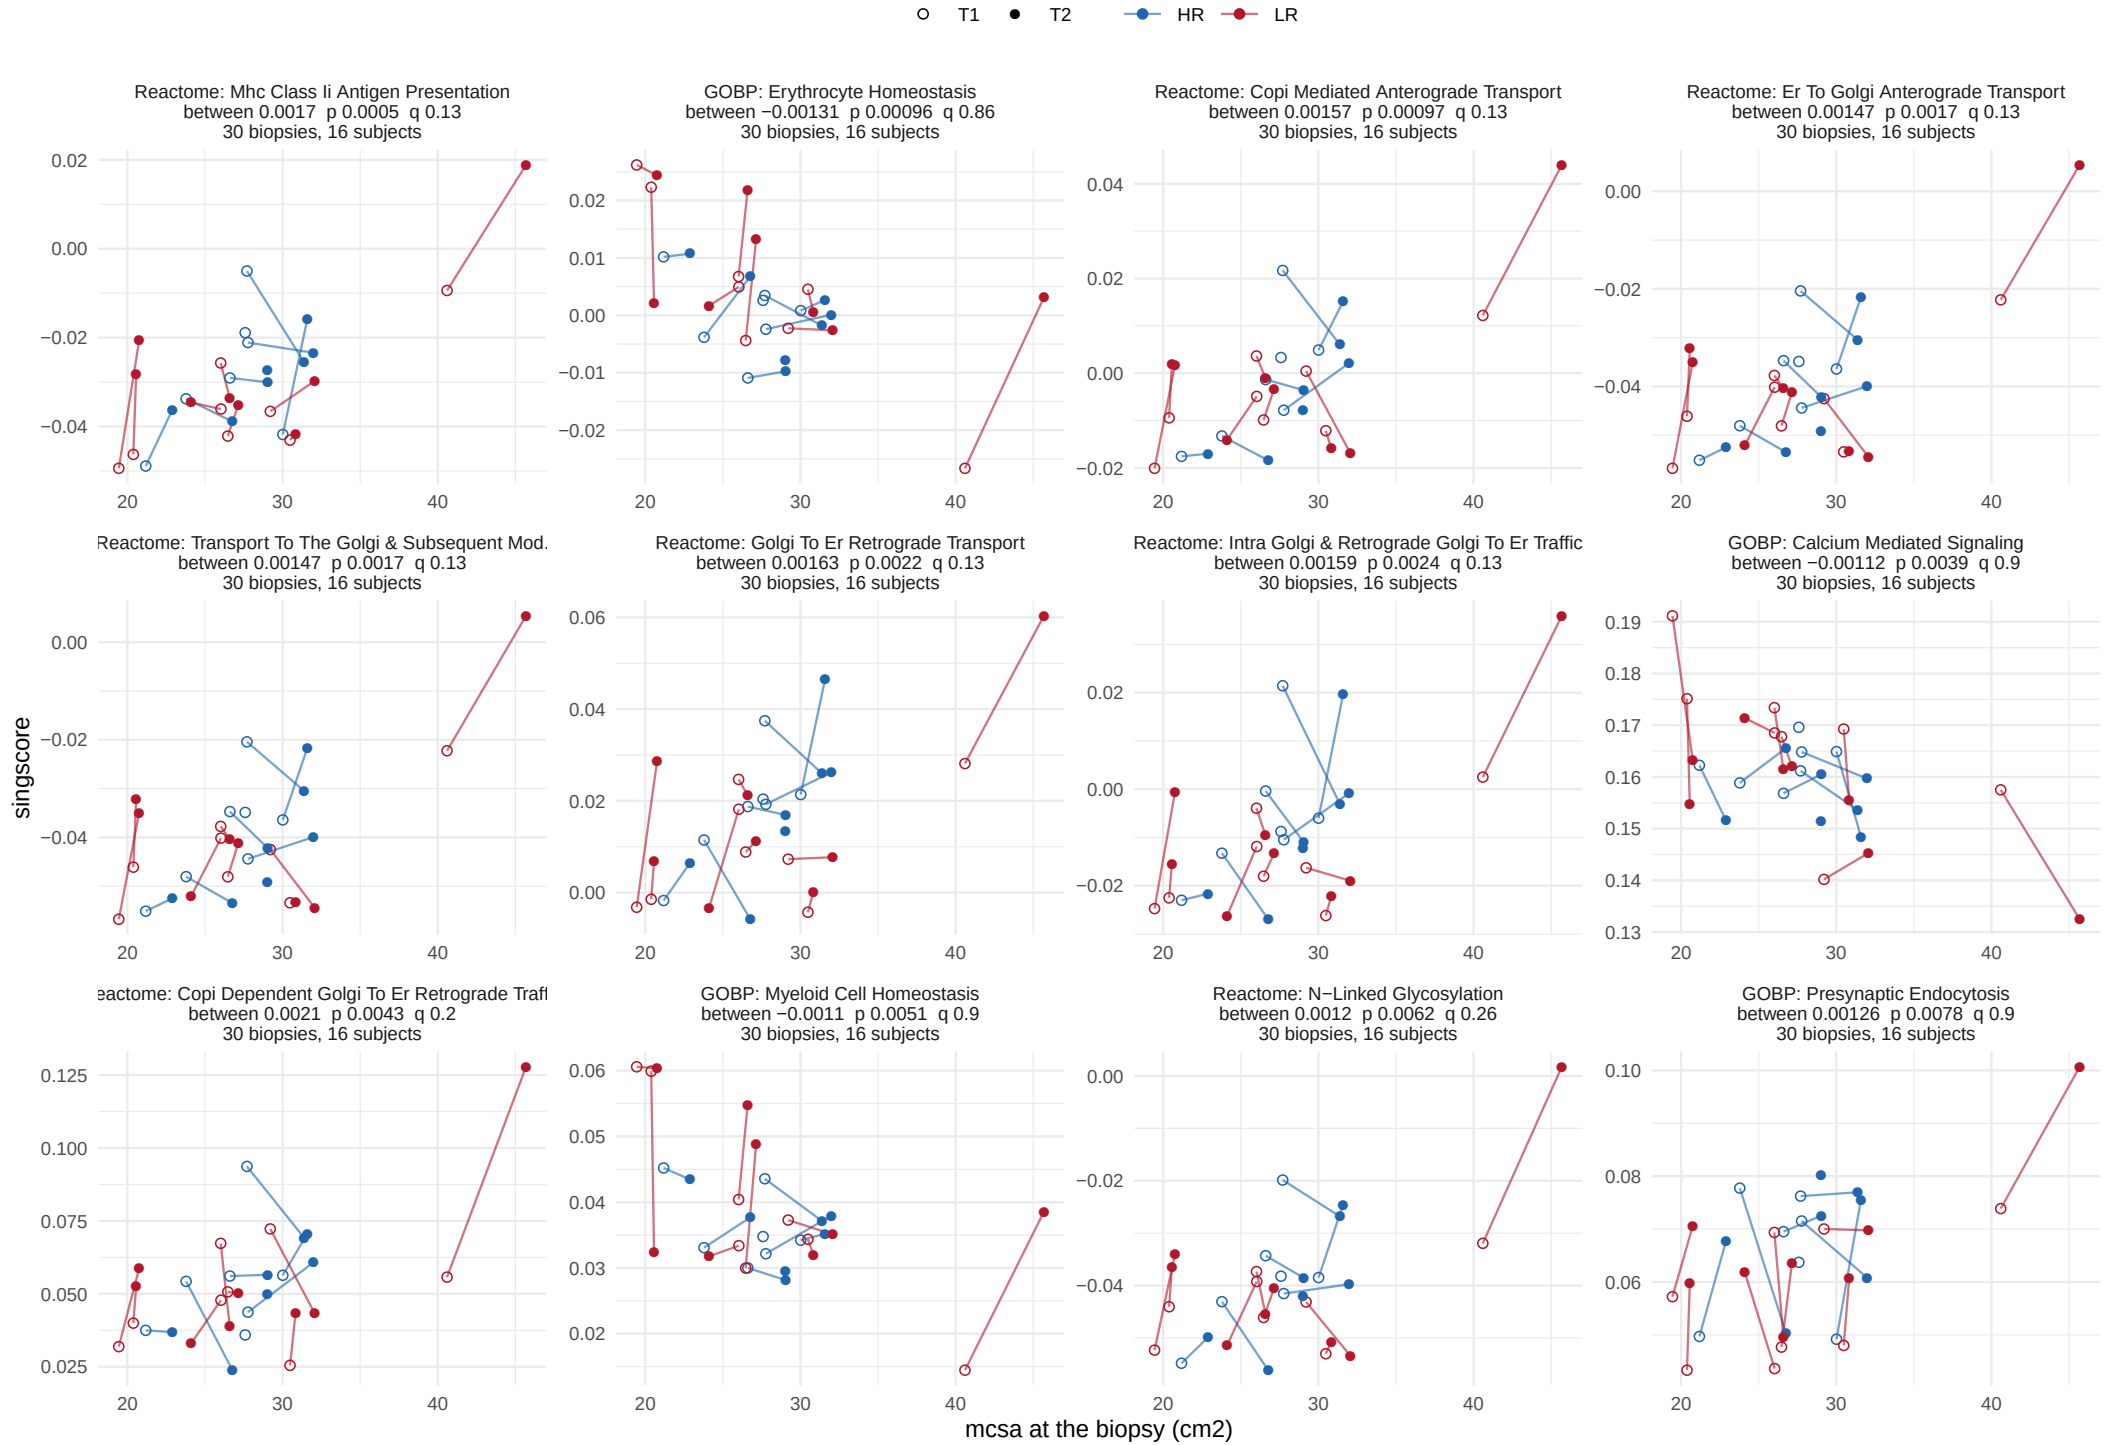

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/05_associate.xlsx, model.

mcsa, between−person term


74 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 2 of 7.

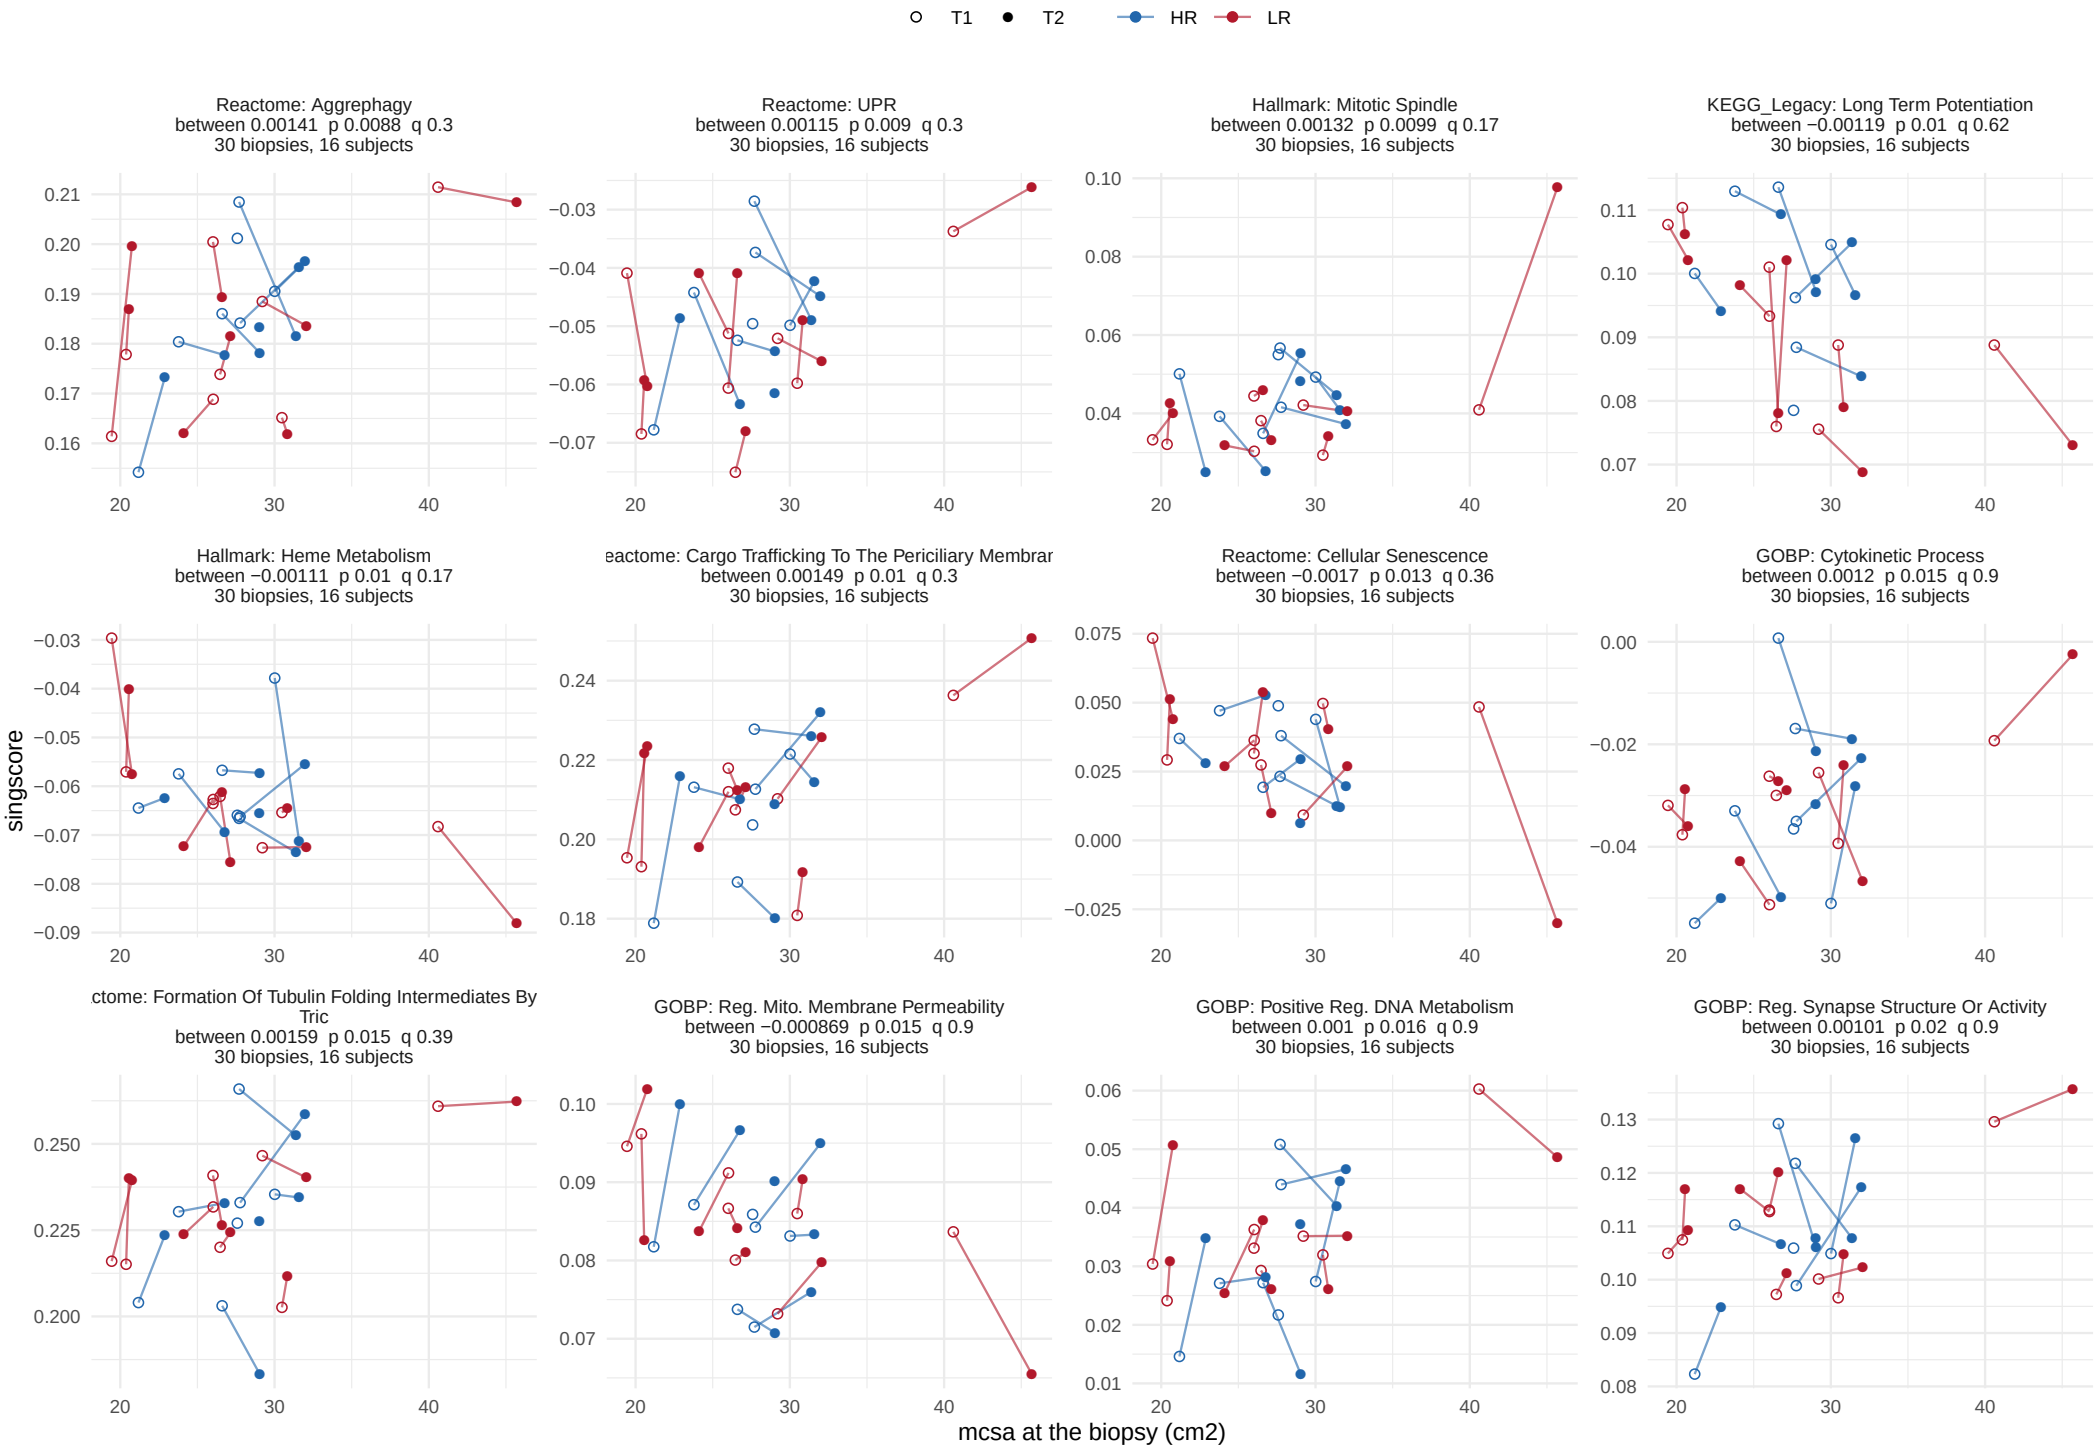

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/05_associate.xlsx, model.

mcsa, between−person term


74 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 3 of 7.

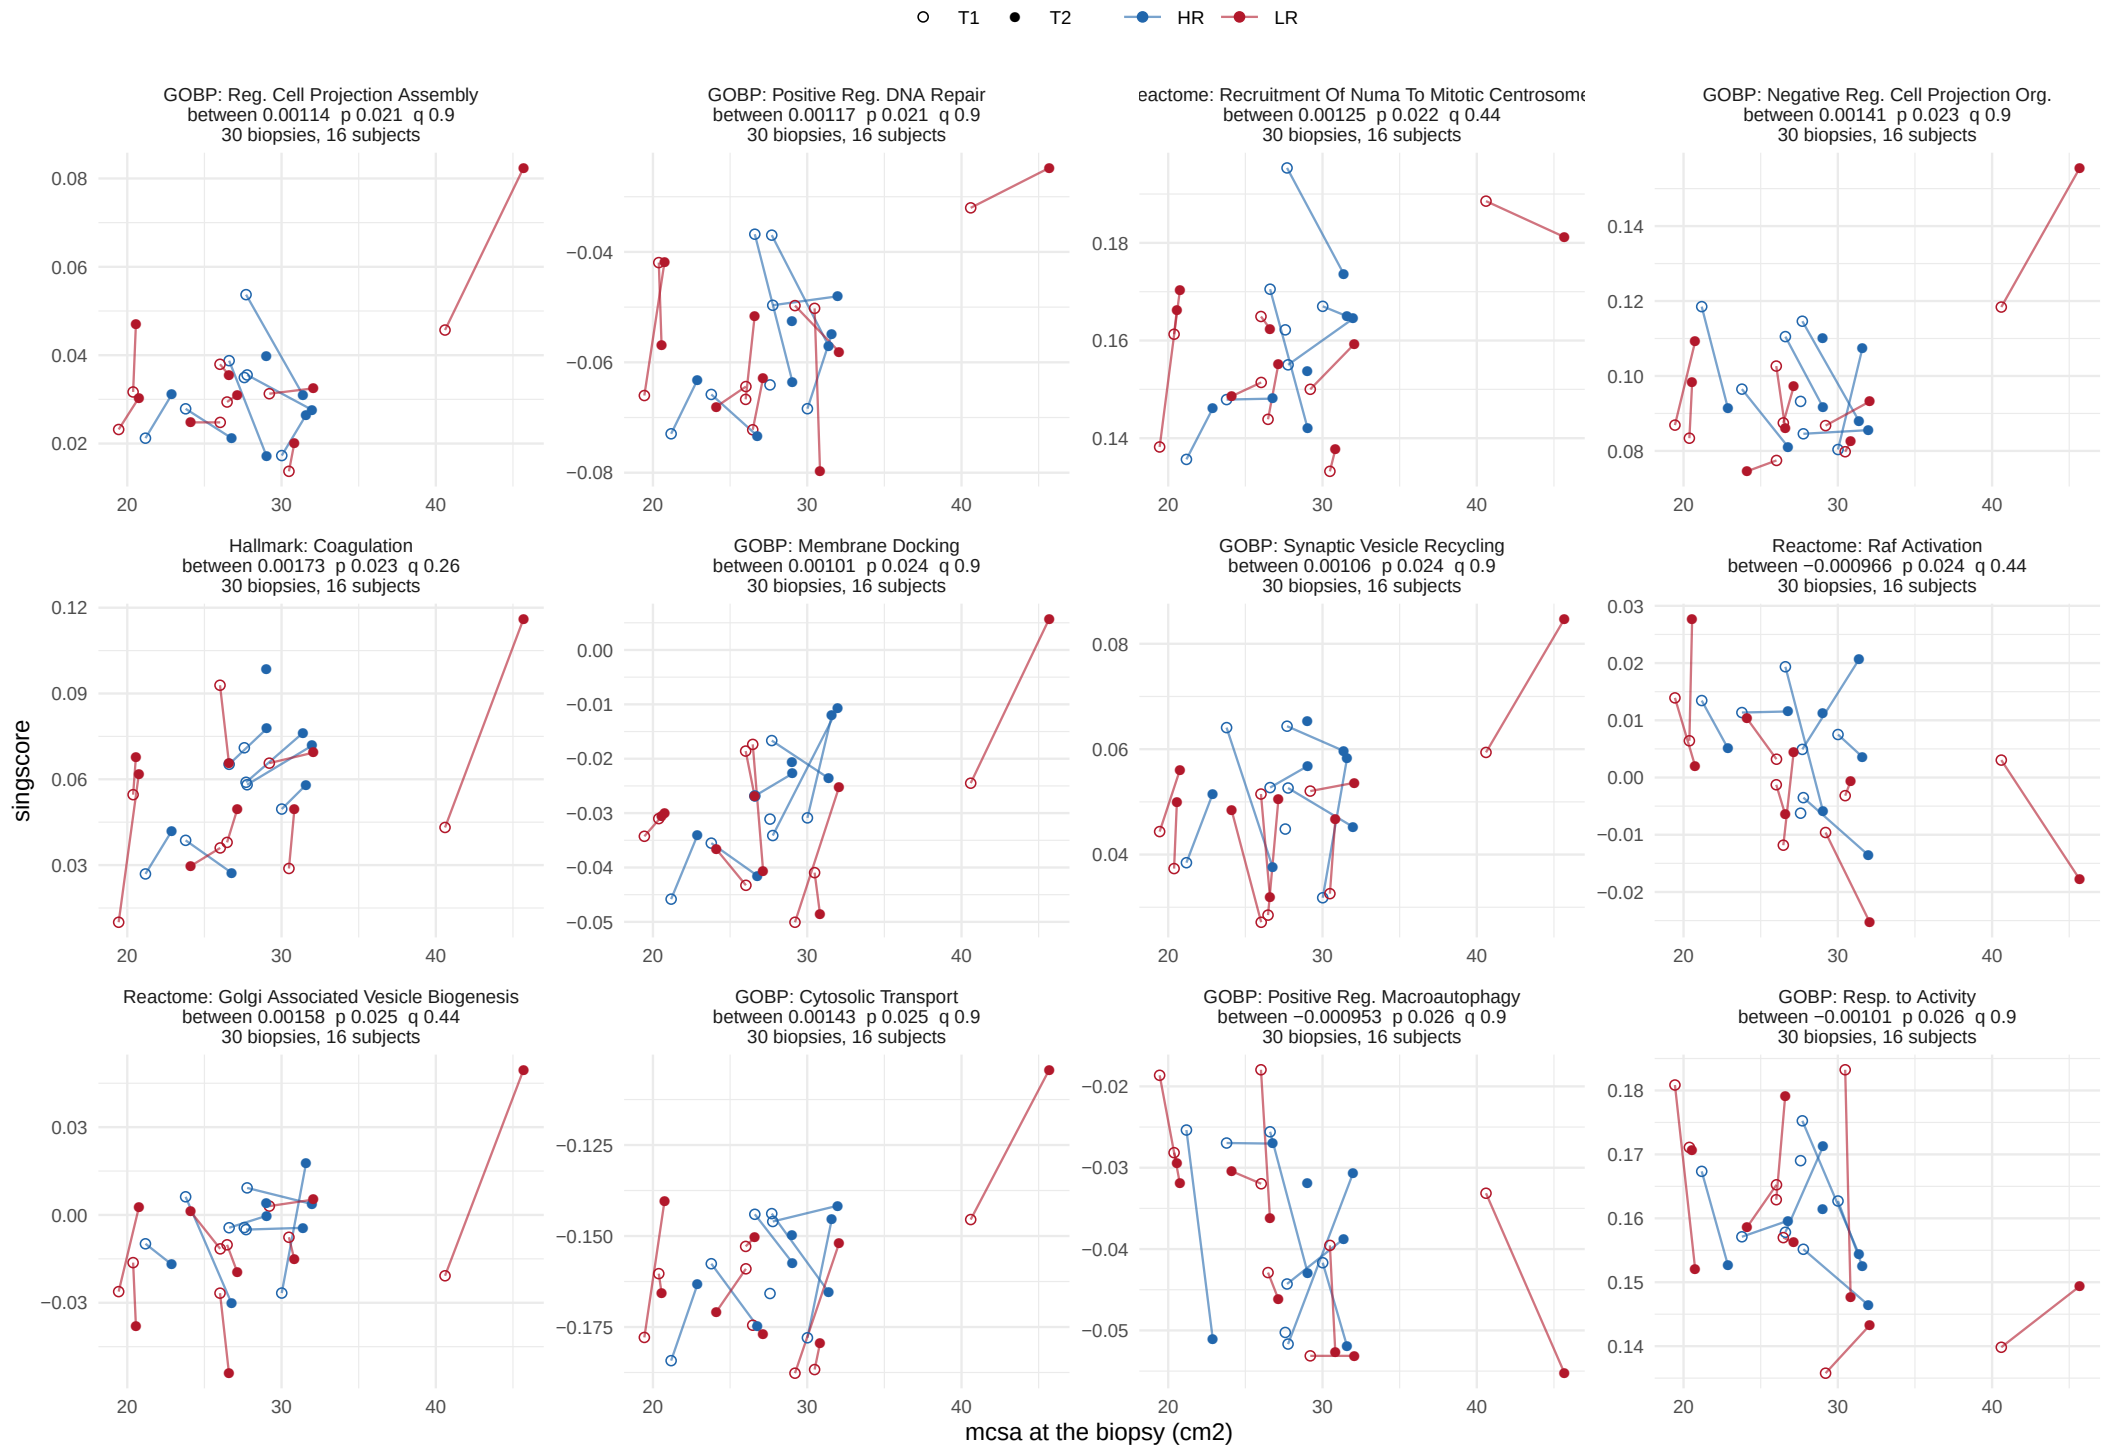

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/05_associate.xlsx, model.

mcsa, between−person term


74 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 4 of 7.

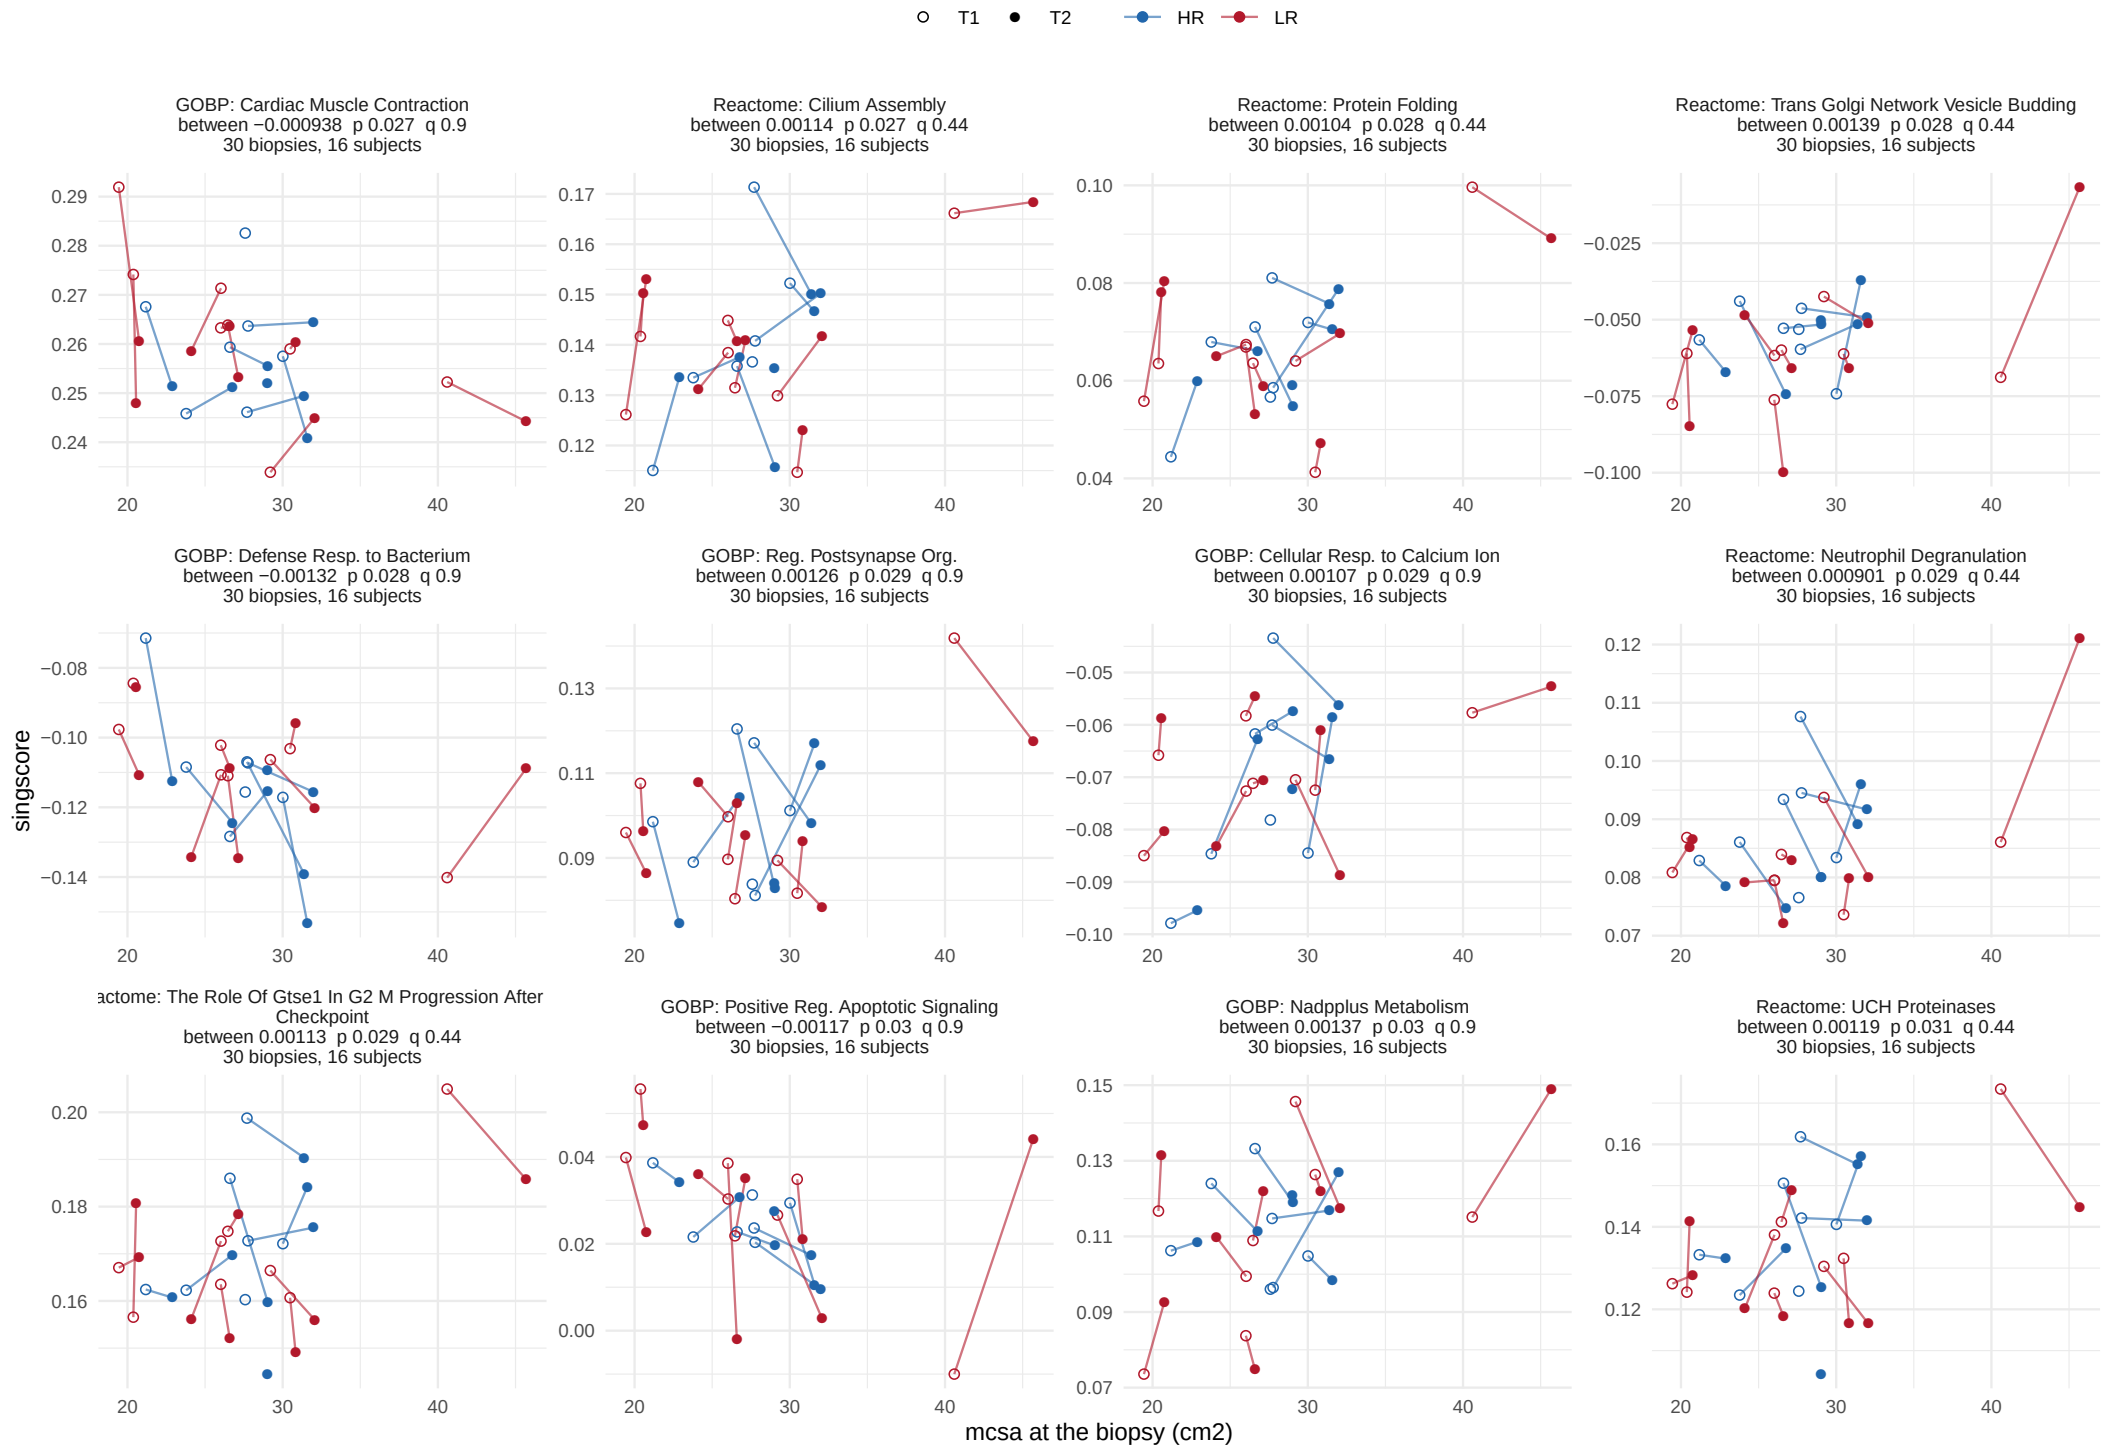

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/05_associate.xlsx, model.

mcsa, between−person term


74 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 5 of 7.

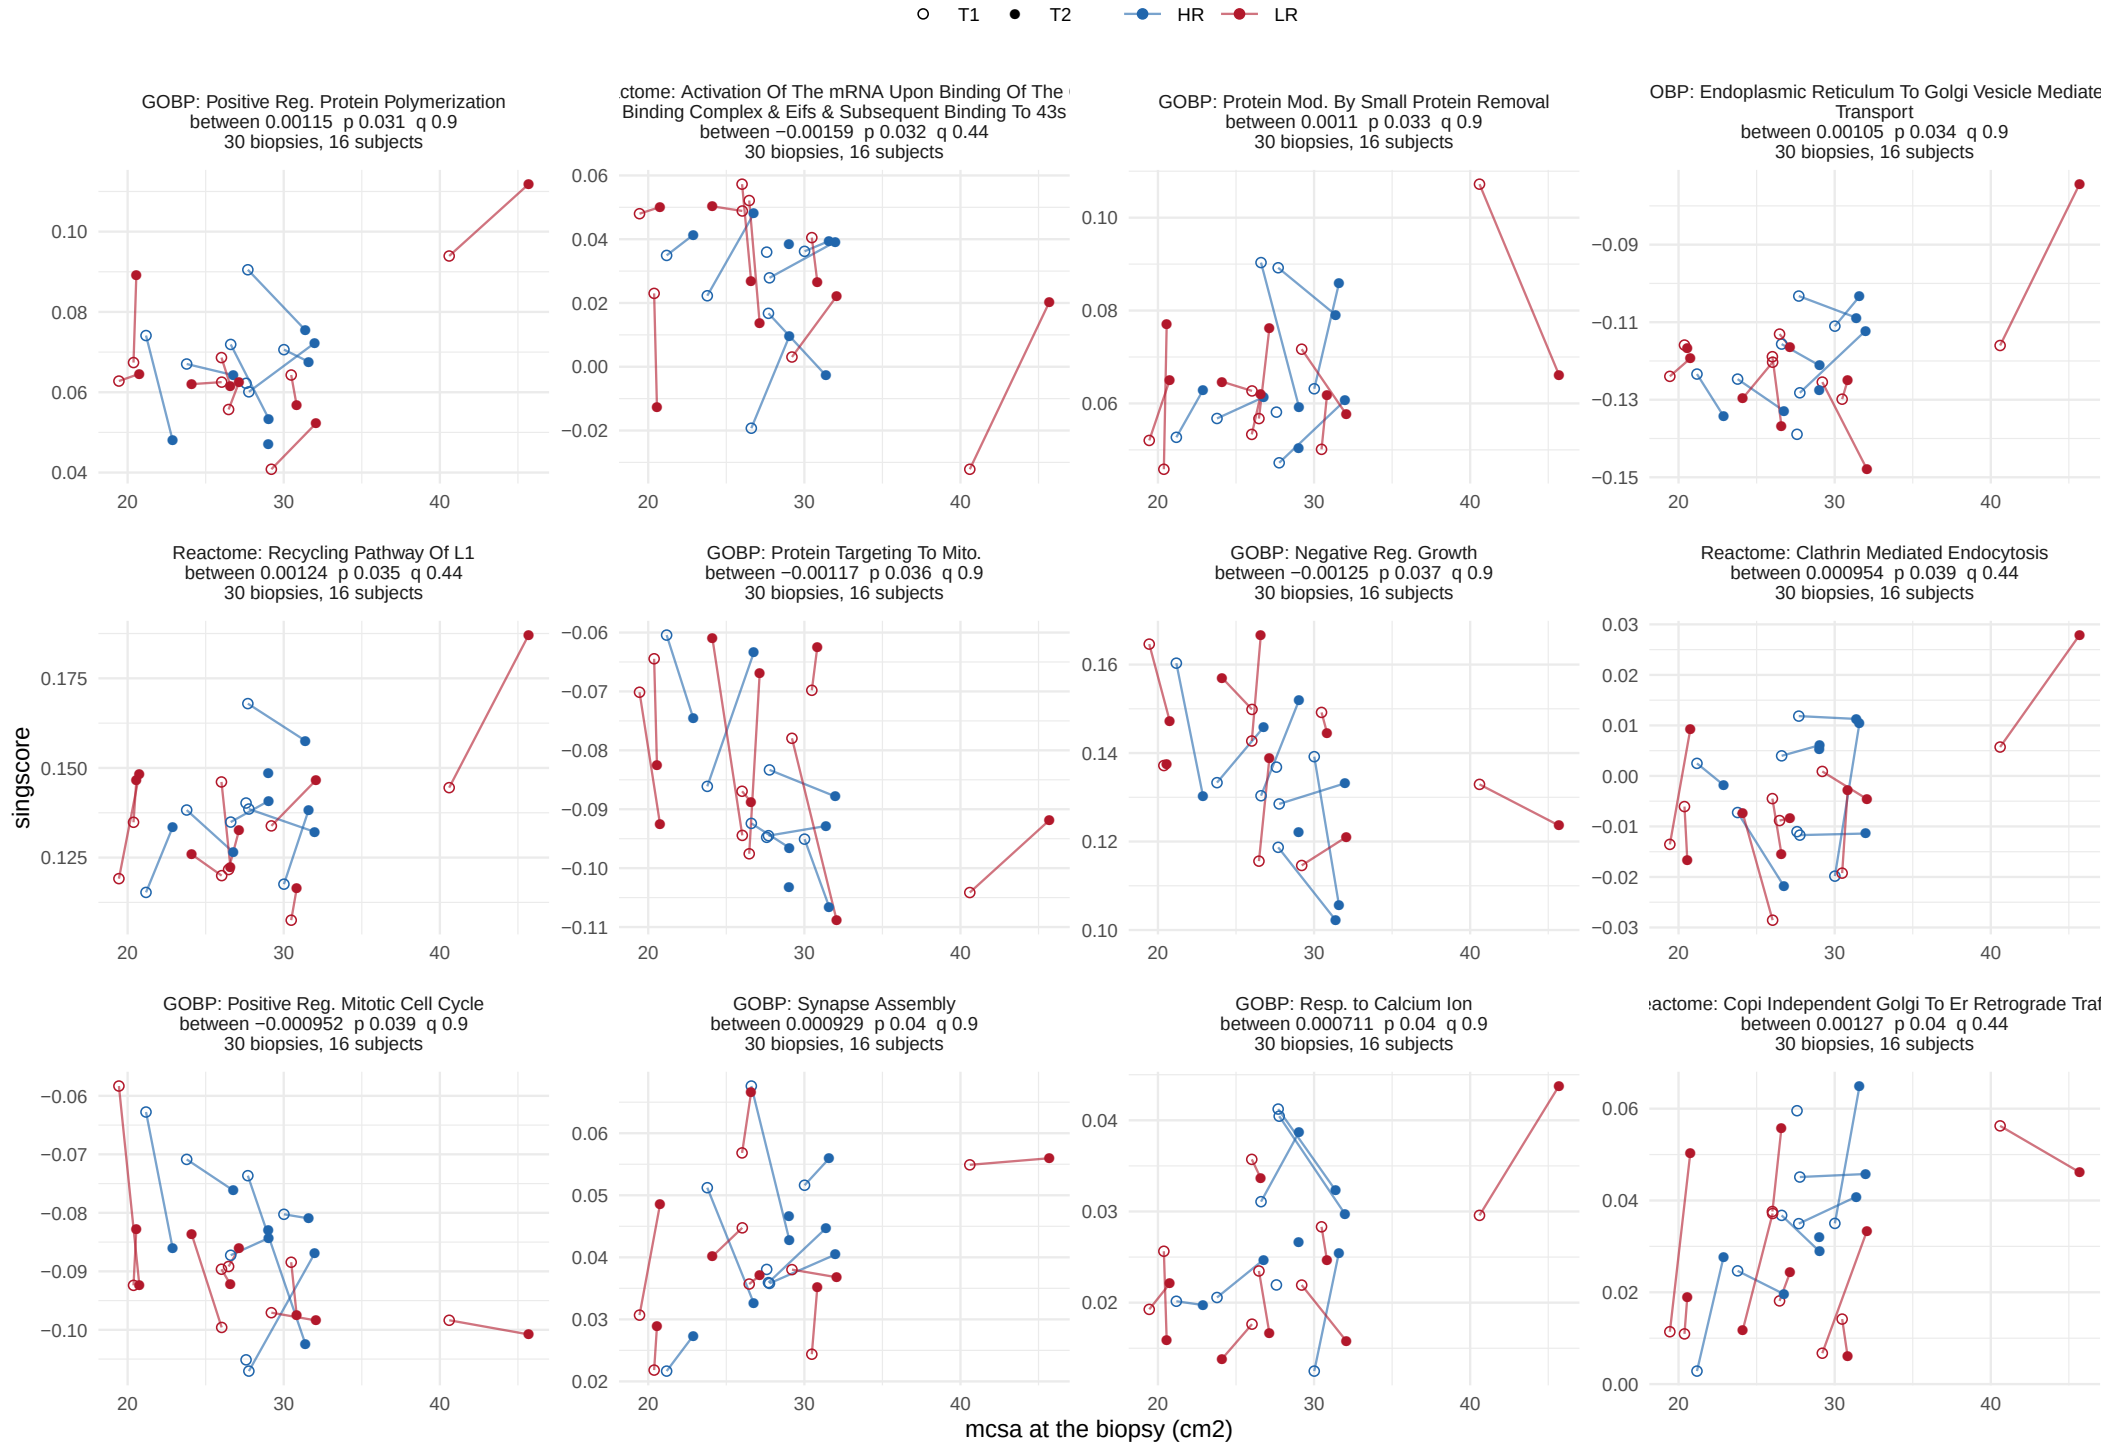

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/05_associate.xlsx, model.

mcsa, between−person term


74 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 6 of 7.

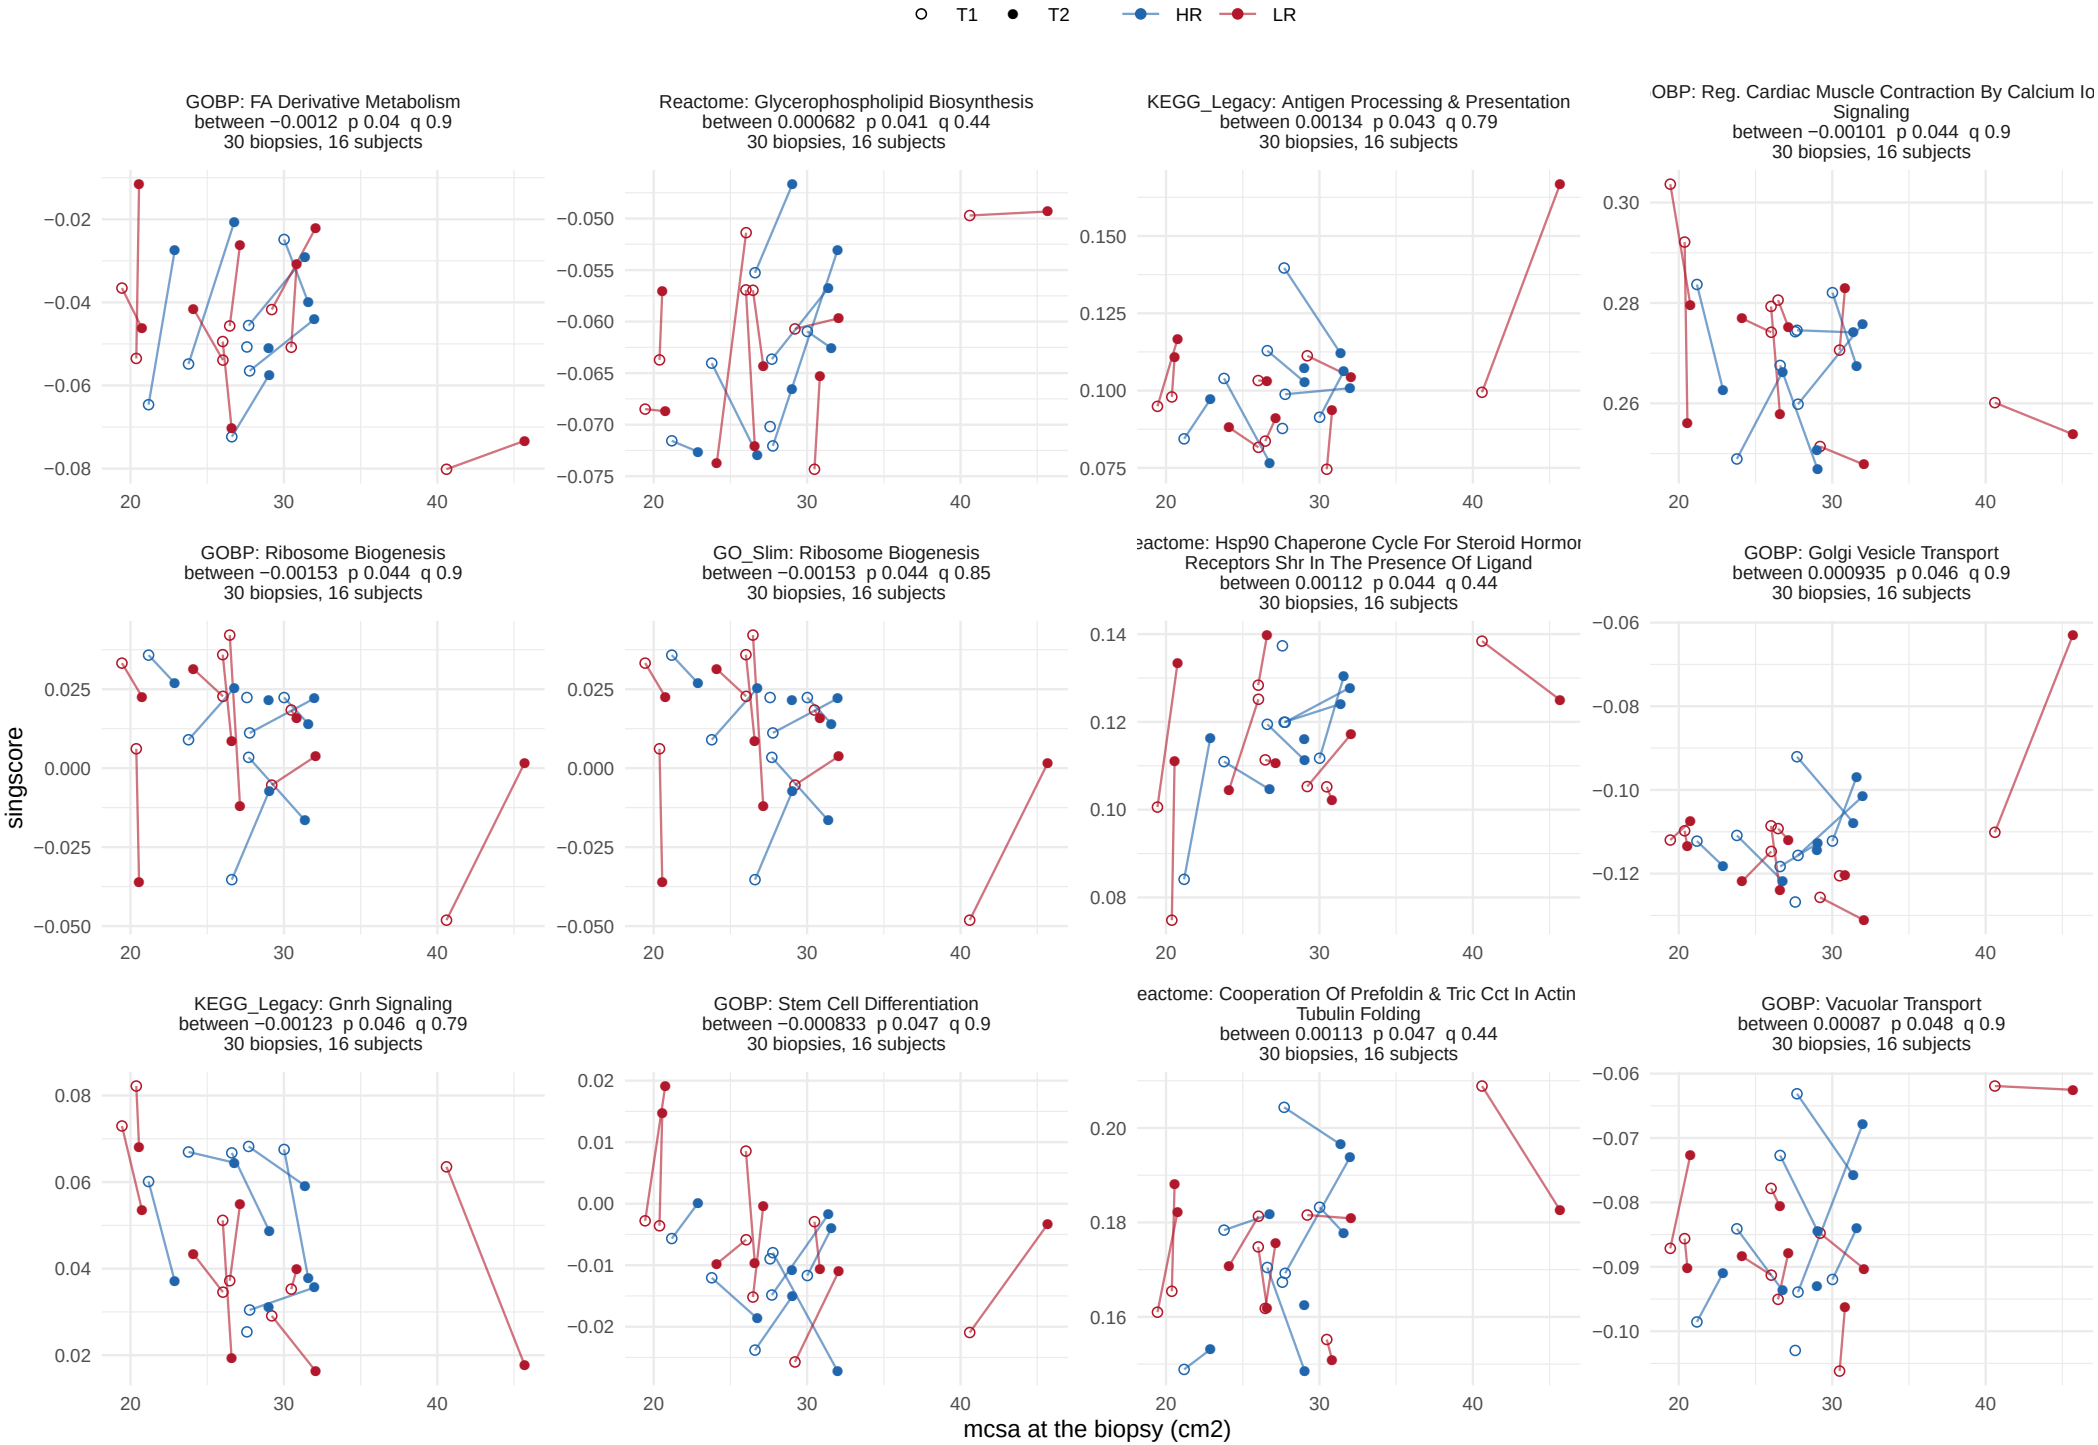

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/05_associate.xlsx, model.

mcsa, between−person term


74 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 7 of 7.

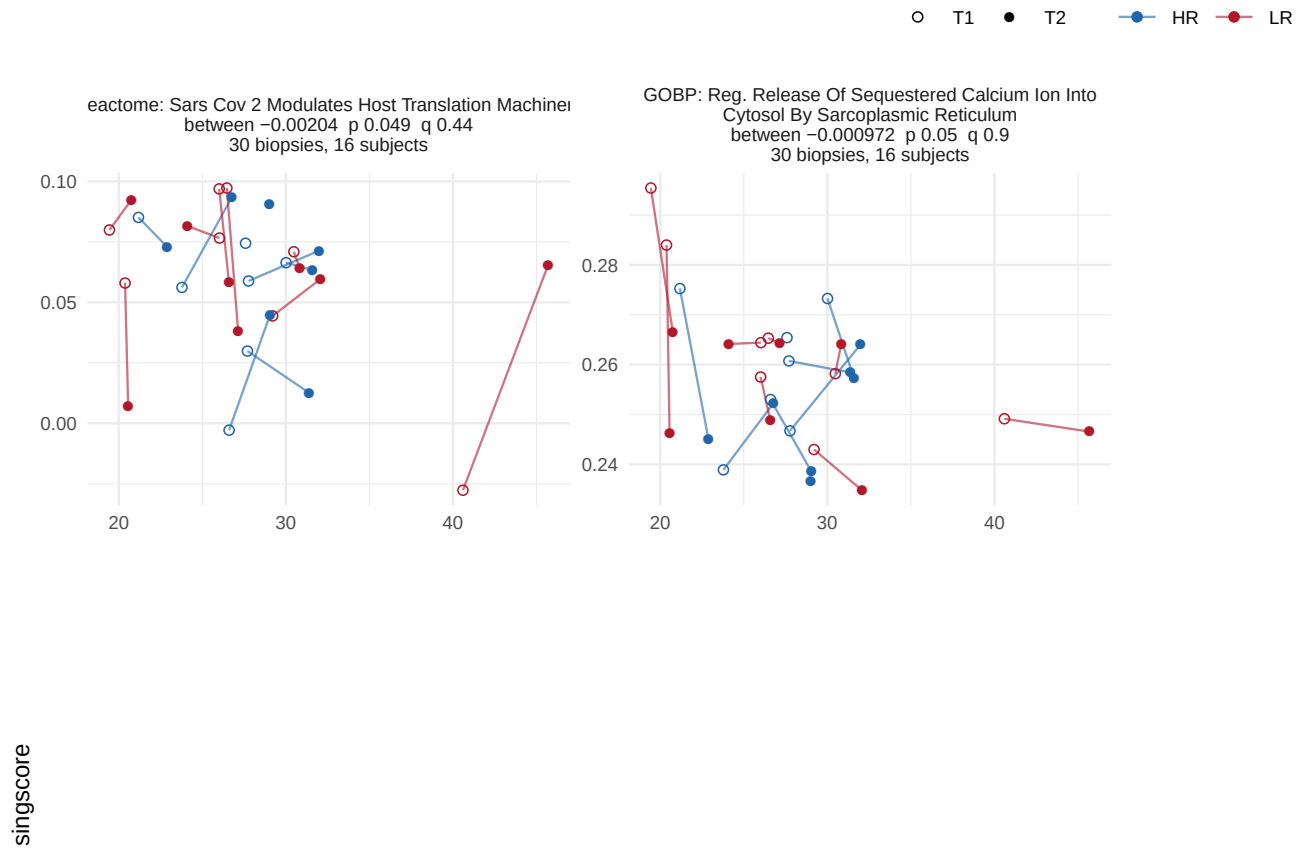

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/05_associate.xlsx, model.

leg_press_1rm, within−person term


47 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 1 of 4.

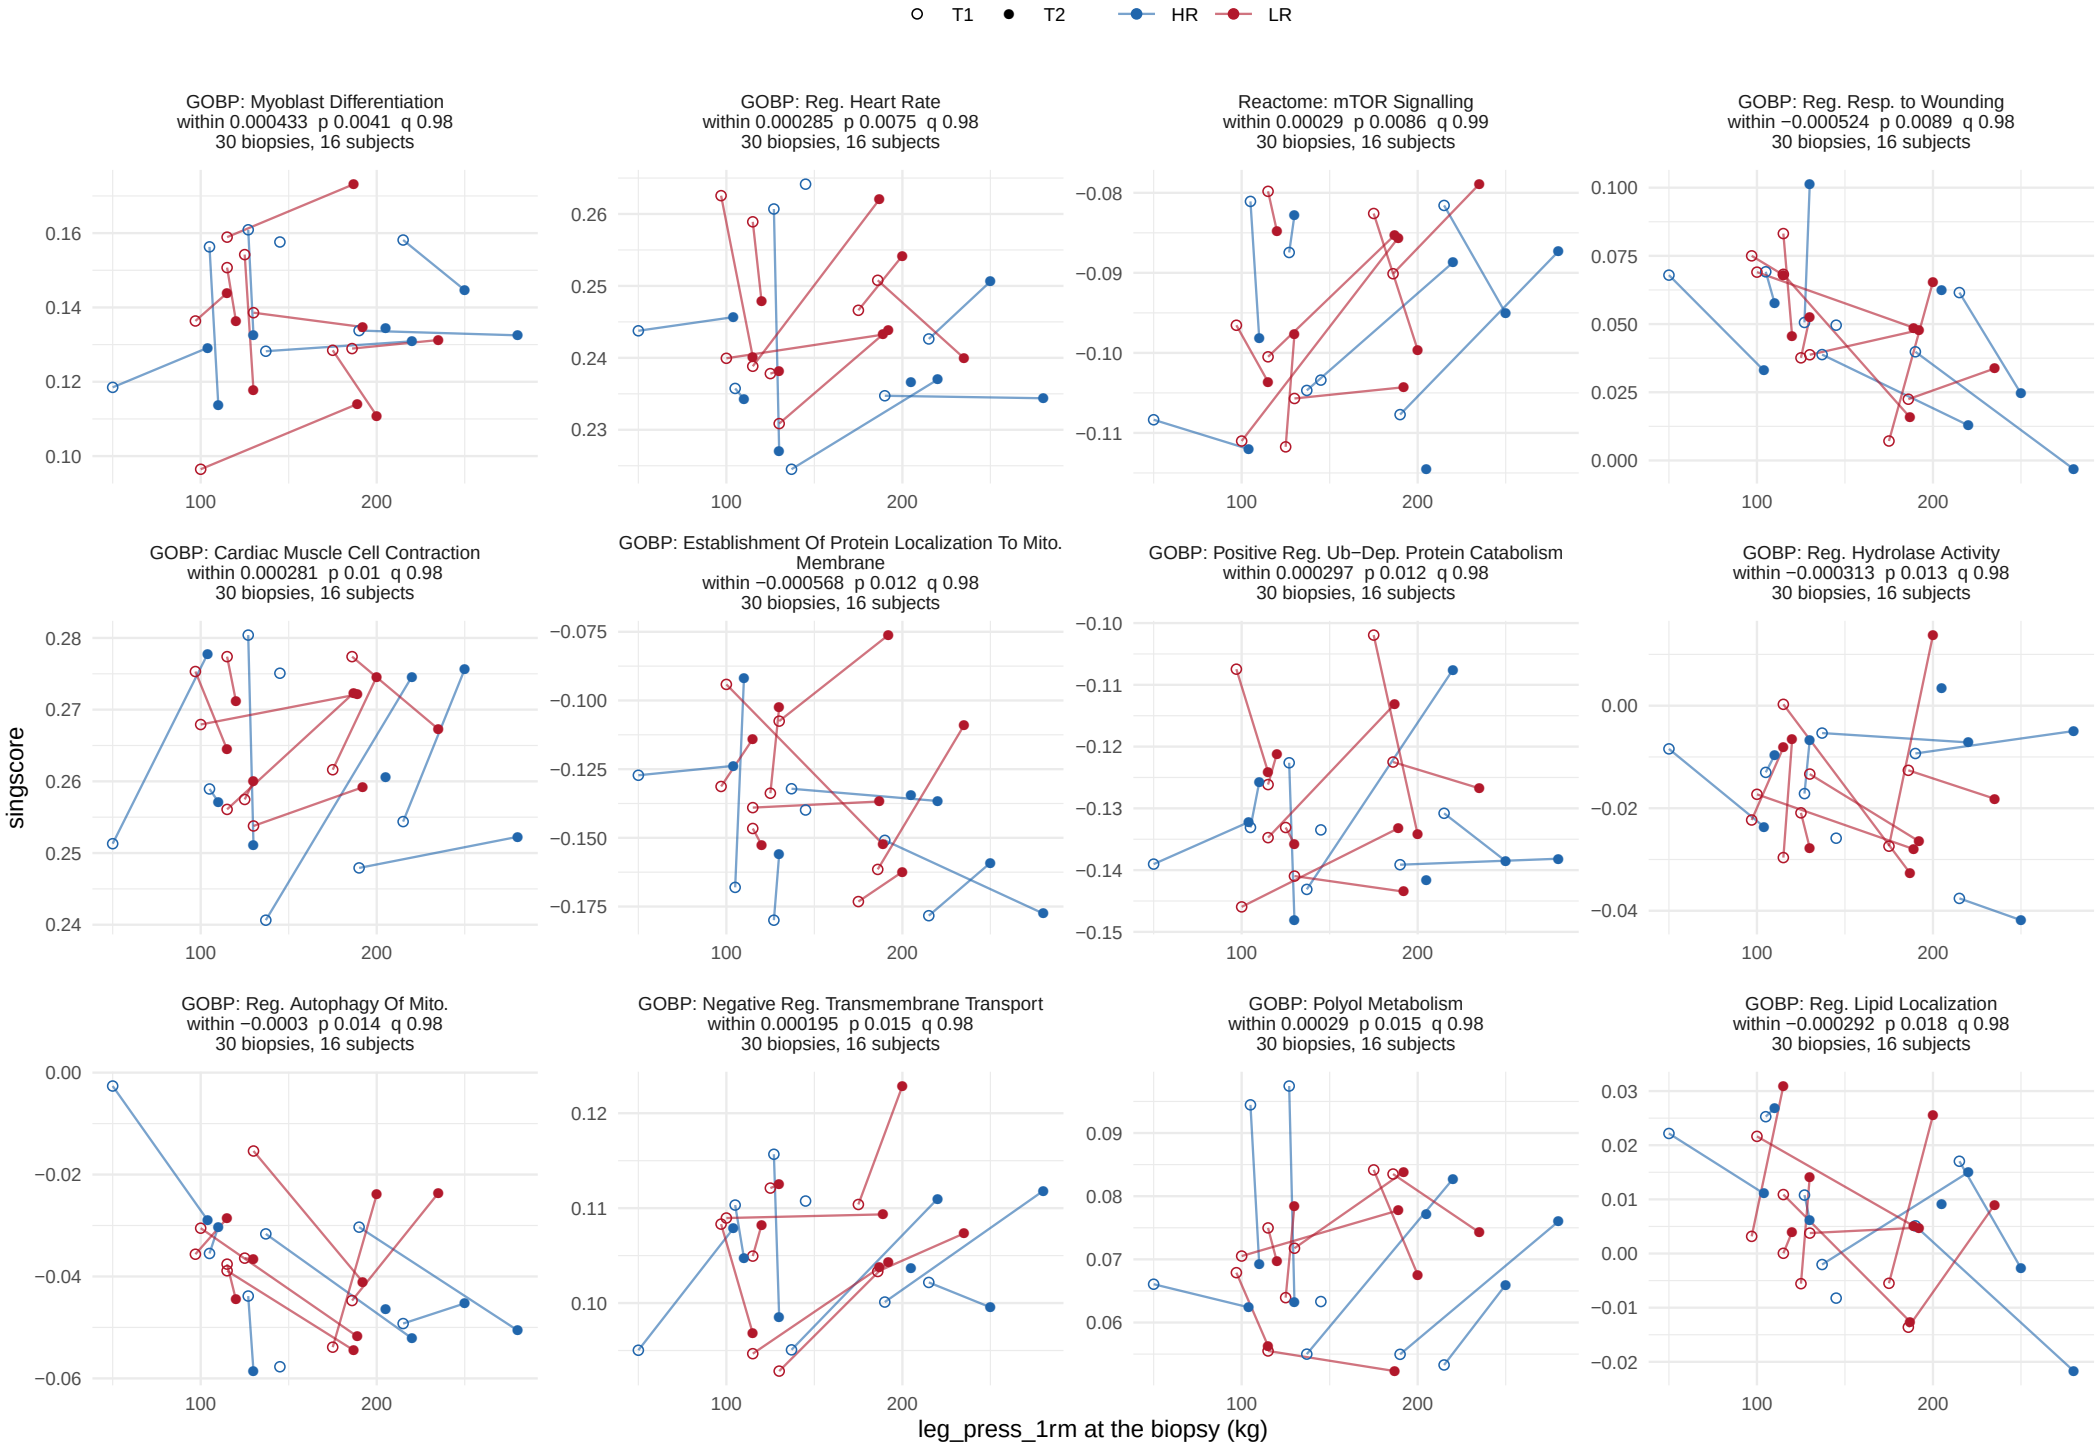

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/05_associate.xlsx, model.

leg_press_1rm, within−person term


47 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 2 of 4.

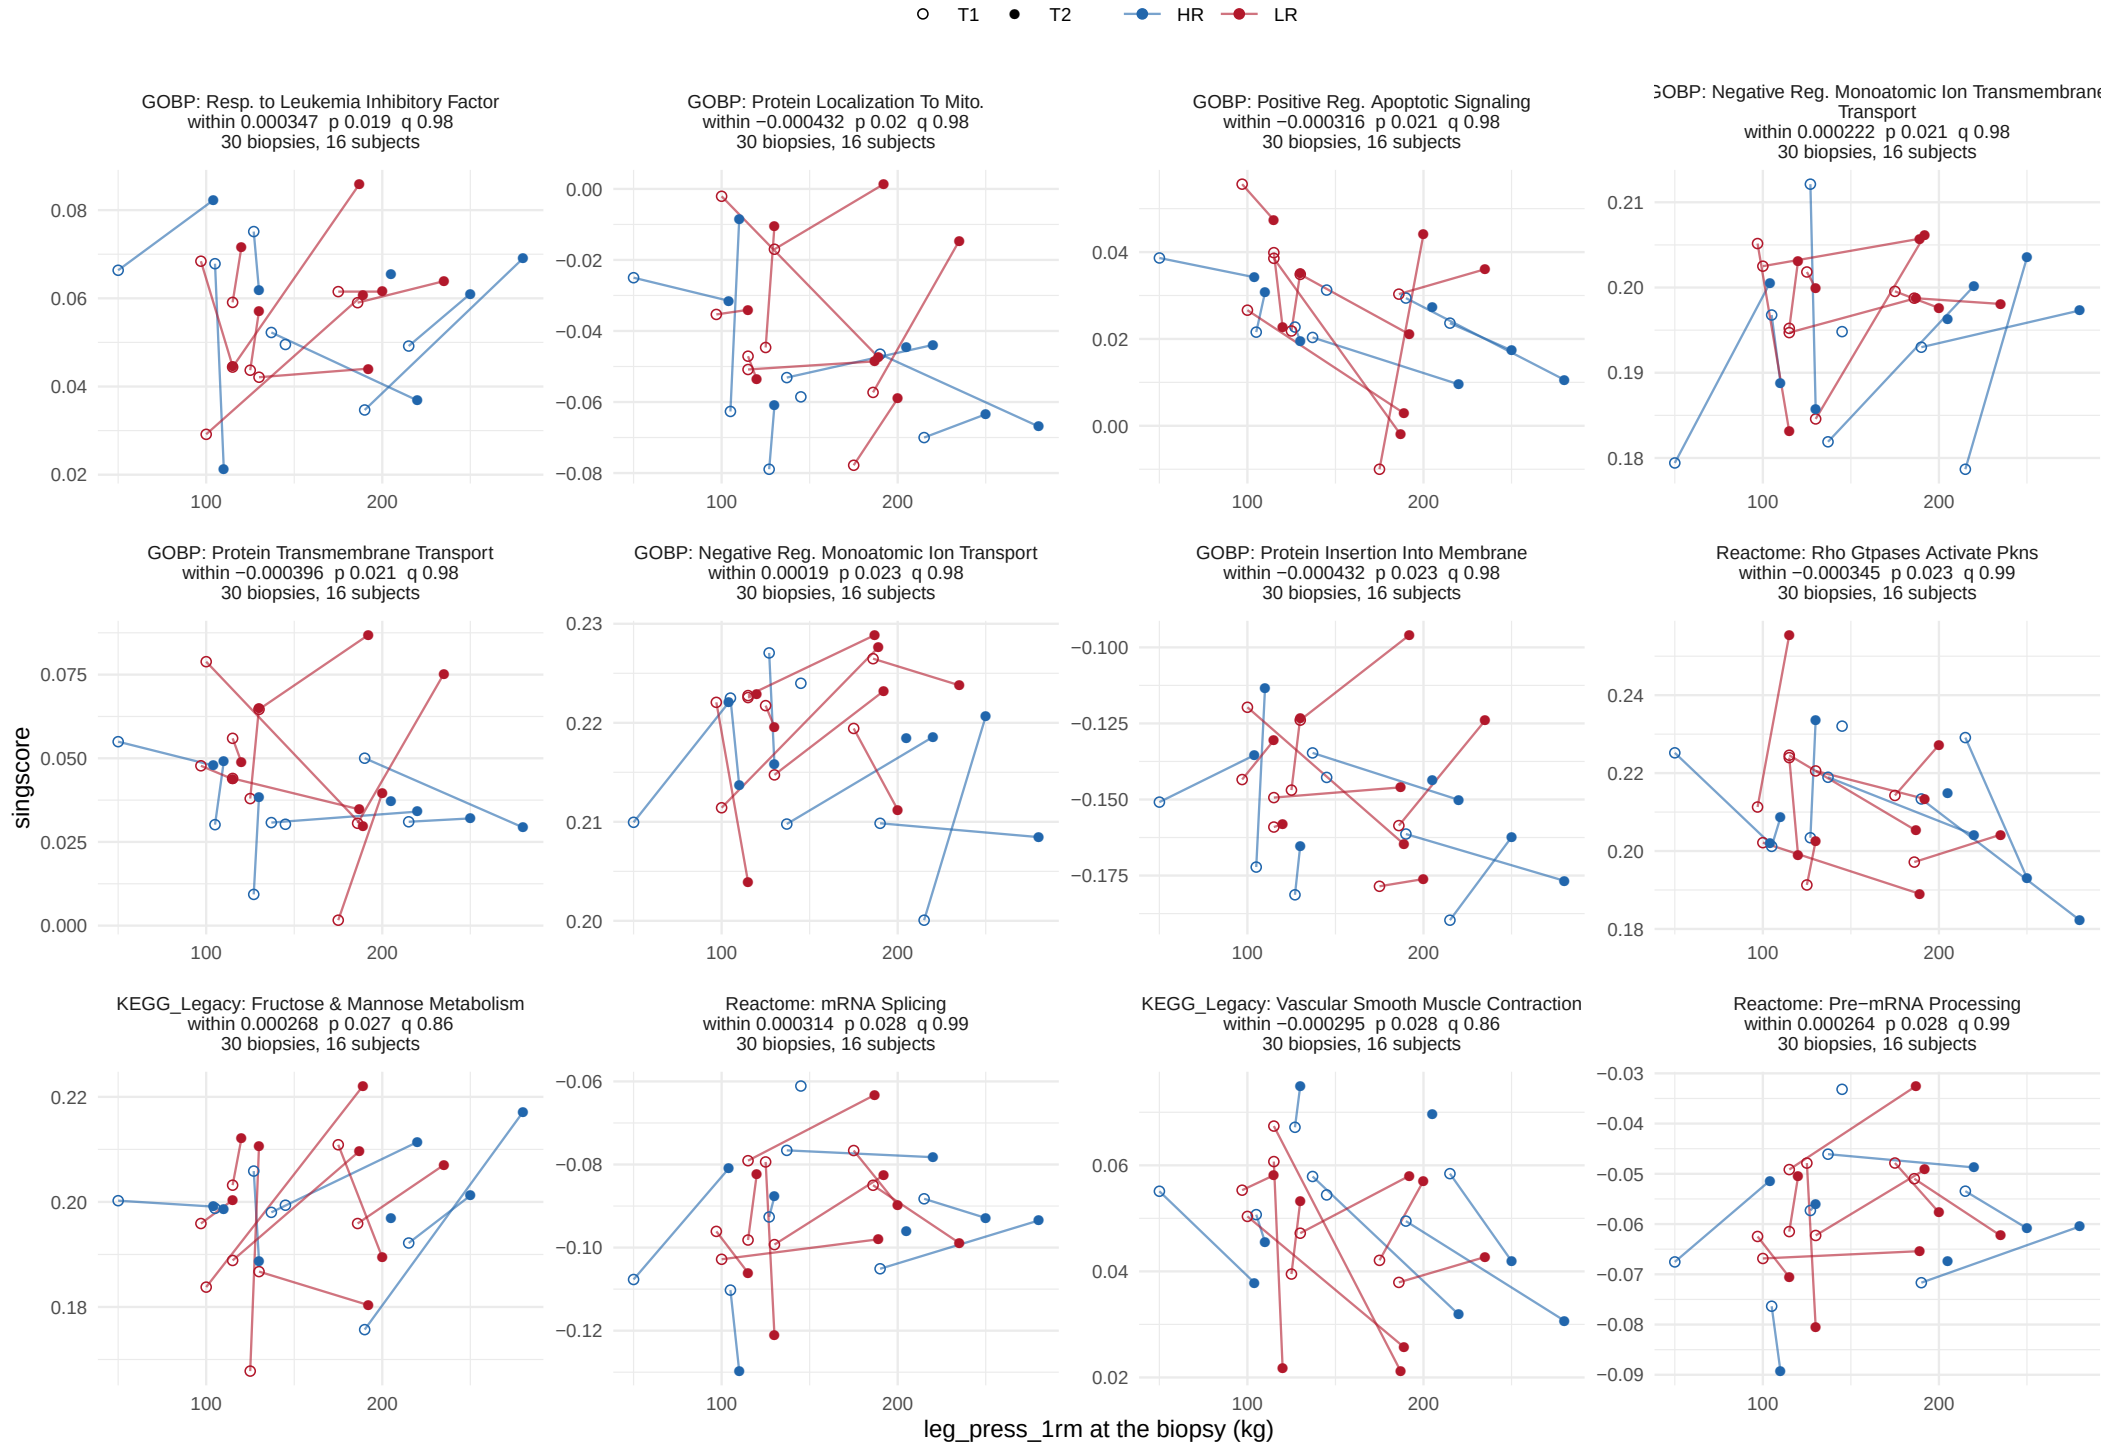

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/05_associate.xlsx, model.

leg_press_1rm, within−person term


47 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 3 of 4.

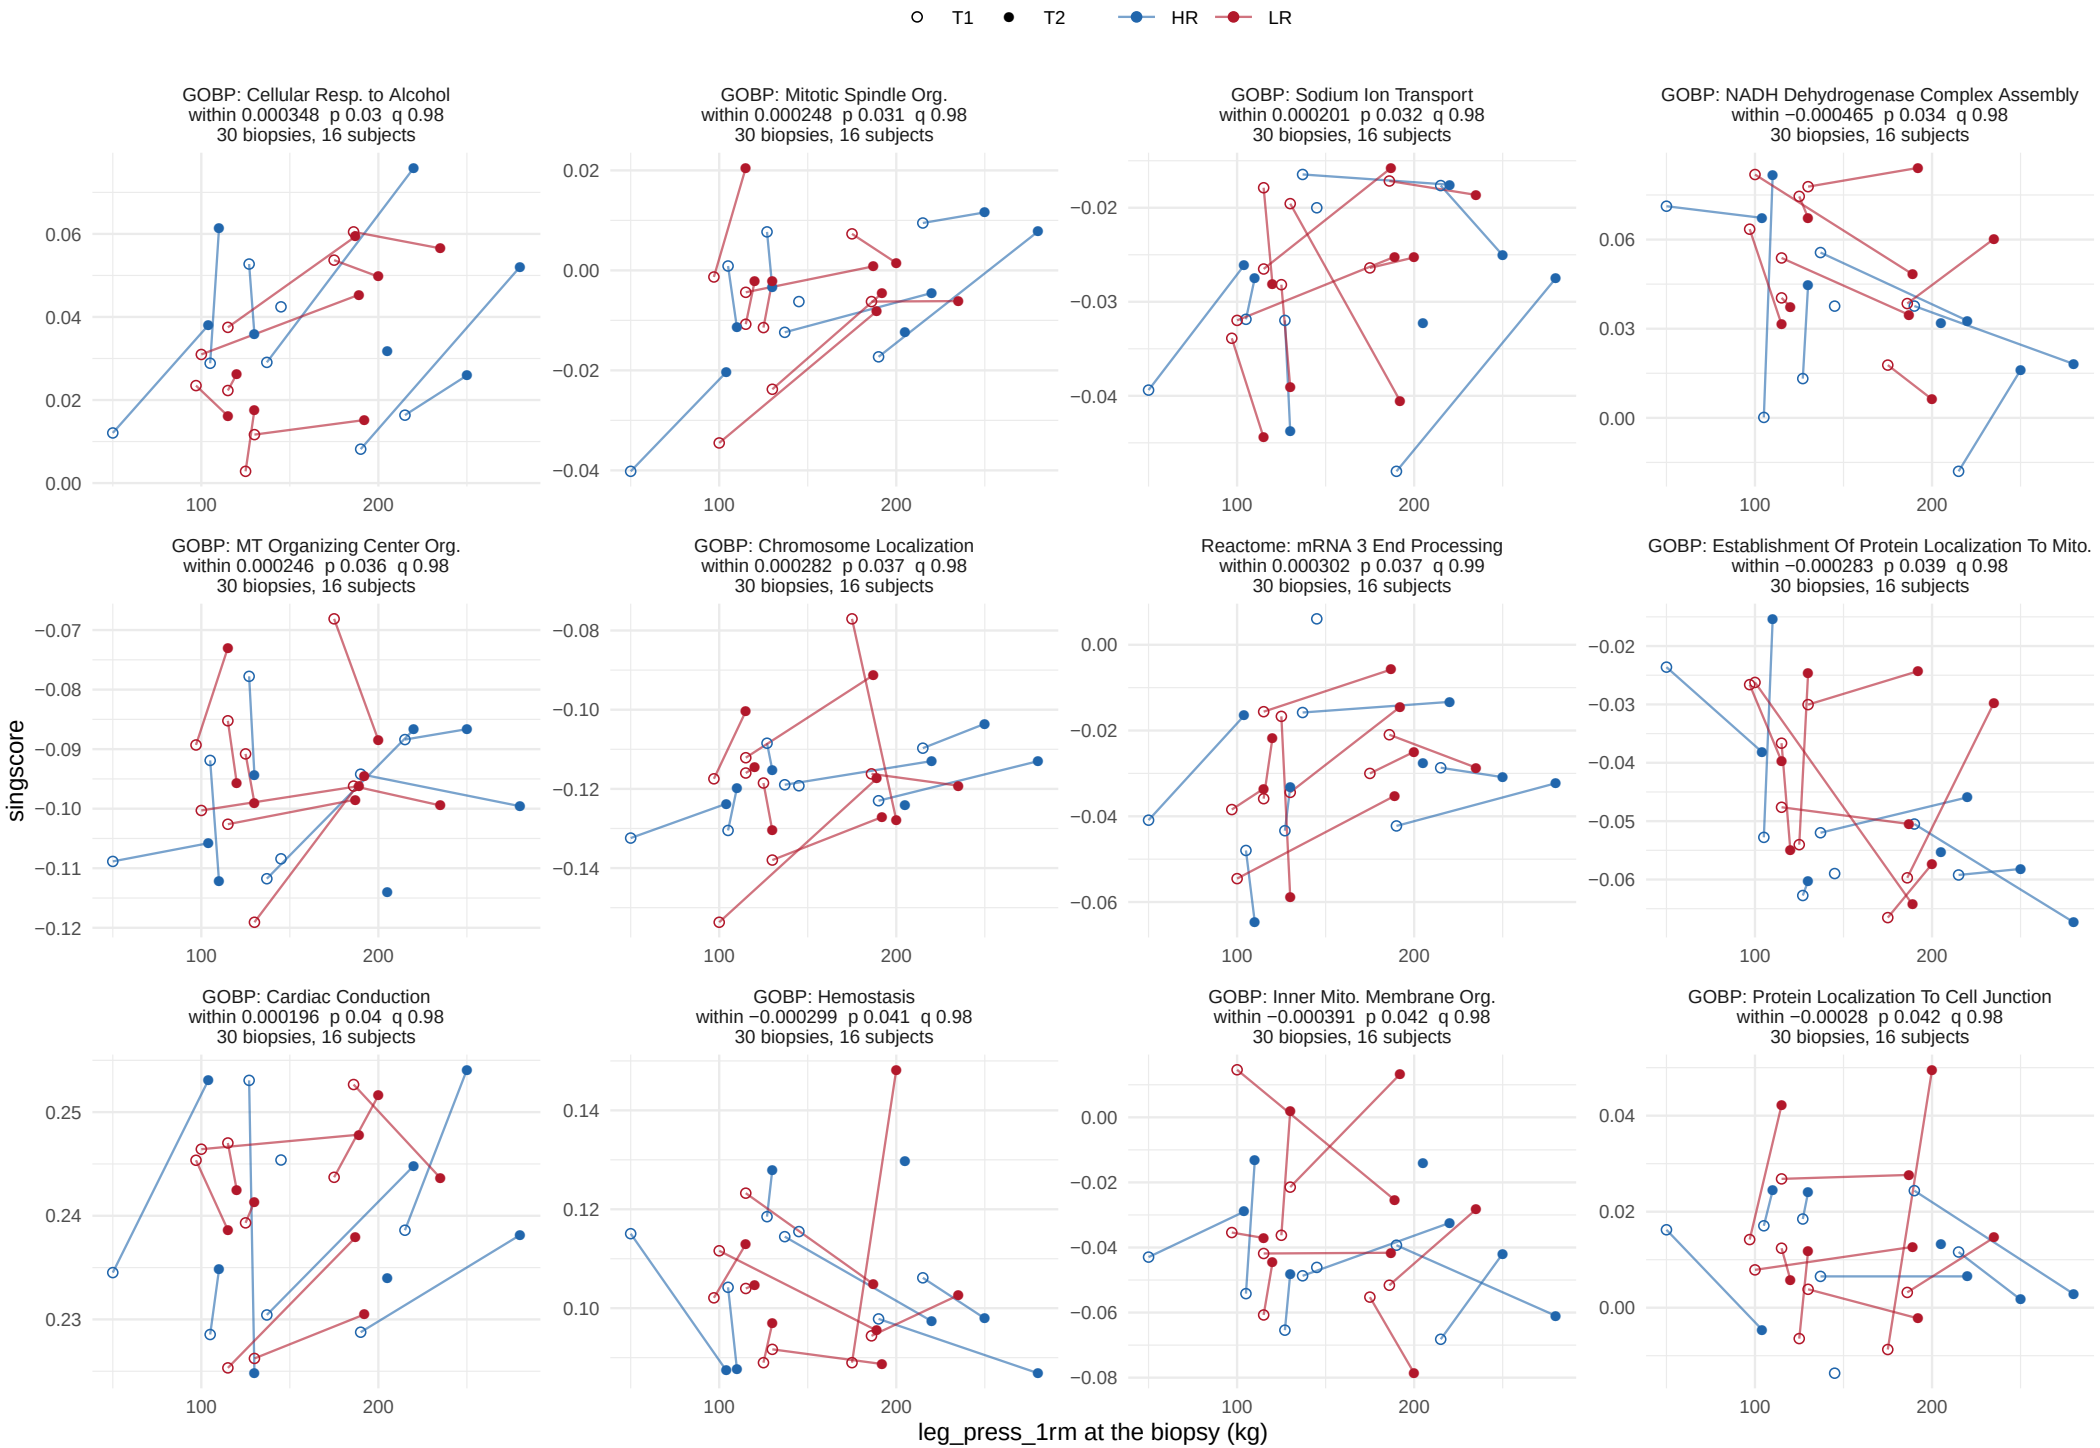

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/05_associate.xlsx, model.

leg_press_1rm, within−person term


47 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 4 of 4.

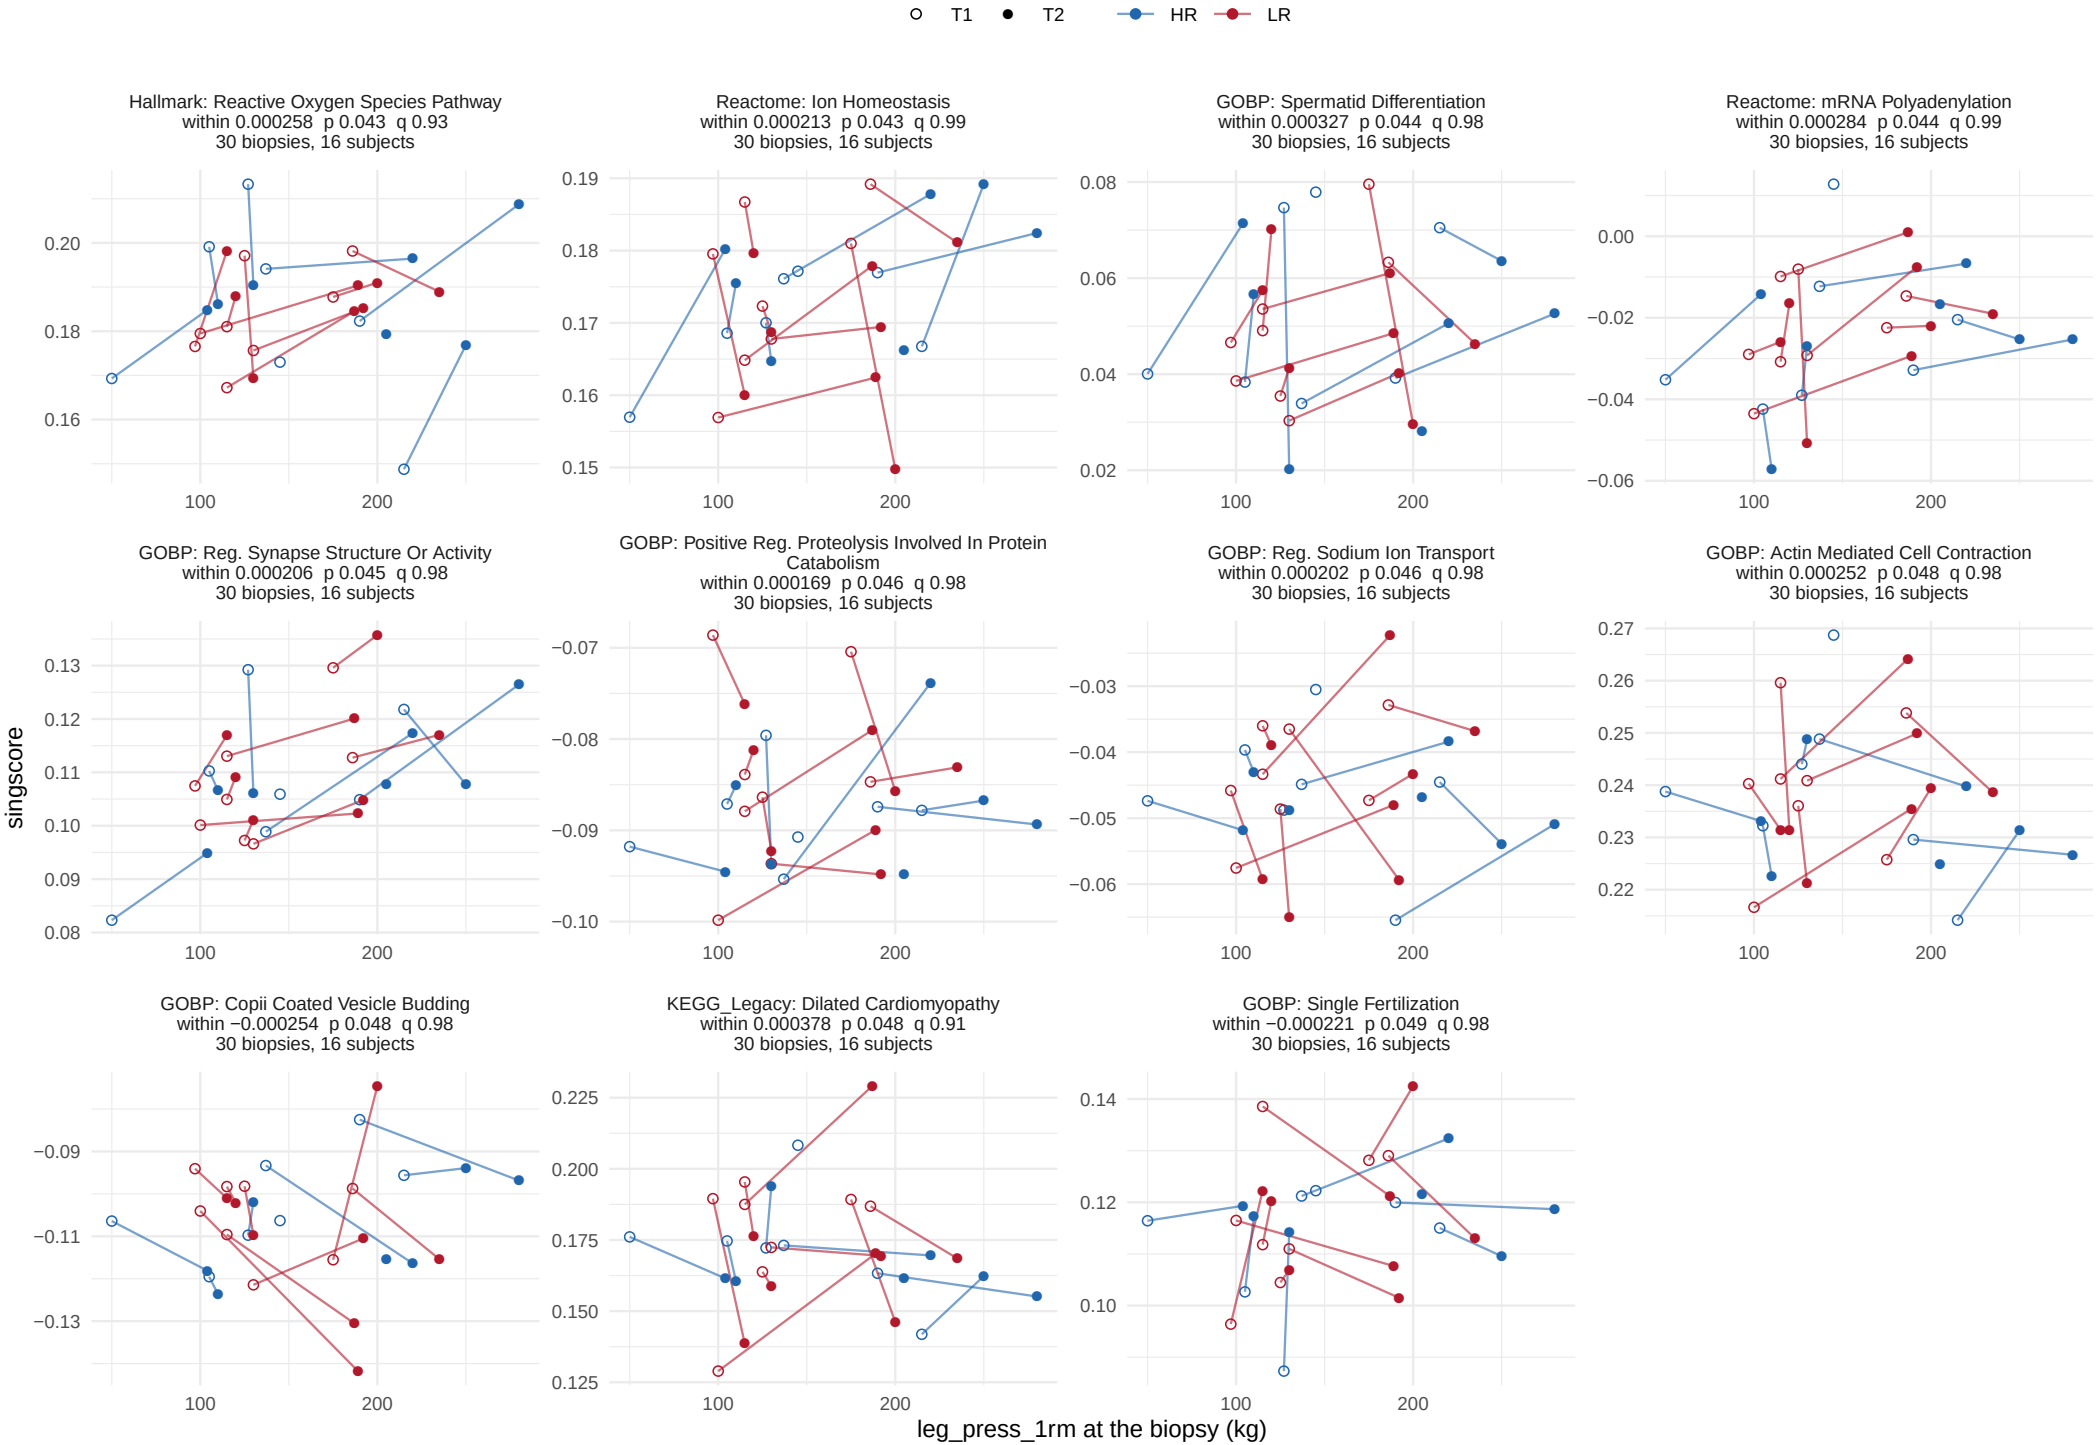

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/05_associate.xlsx, model.

leg_press_1rm, between−person term


64 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 1 of 6.

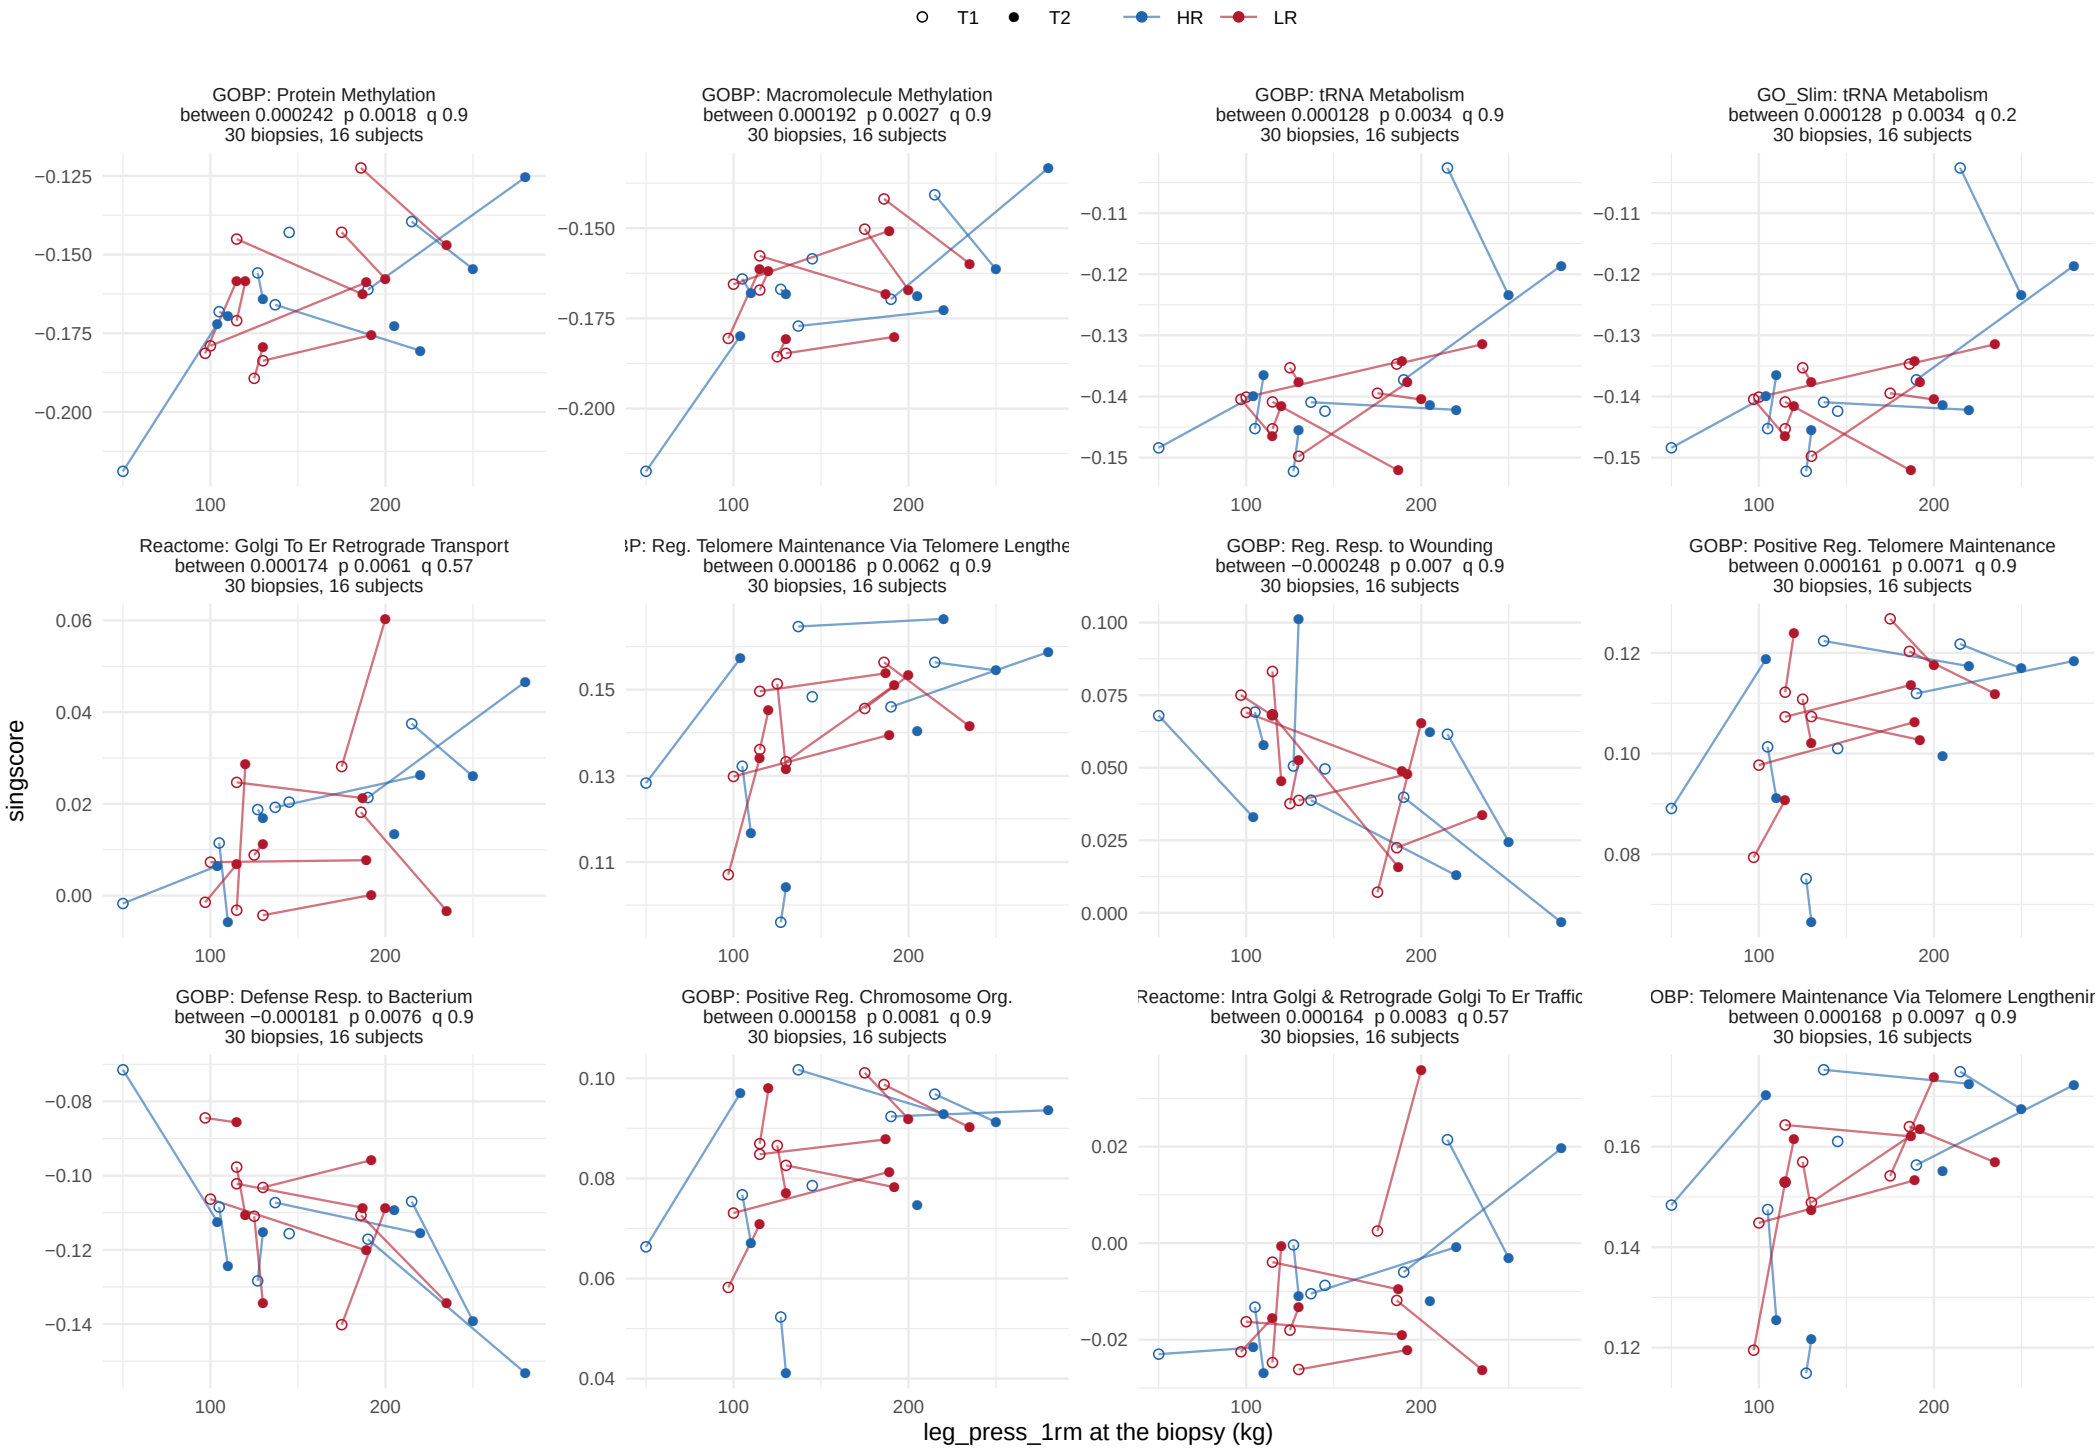

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/05_associate.xlsx, model.

leg_press_1rm, between−person term


64 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 2 of 6.

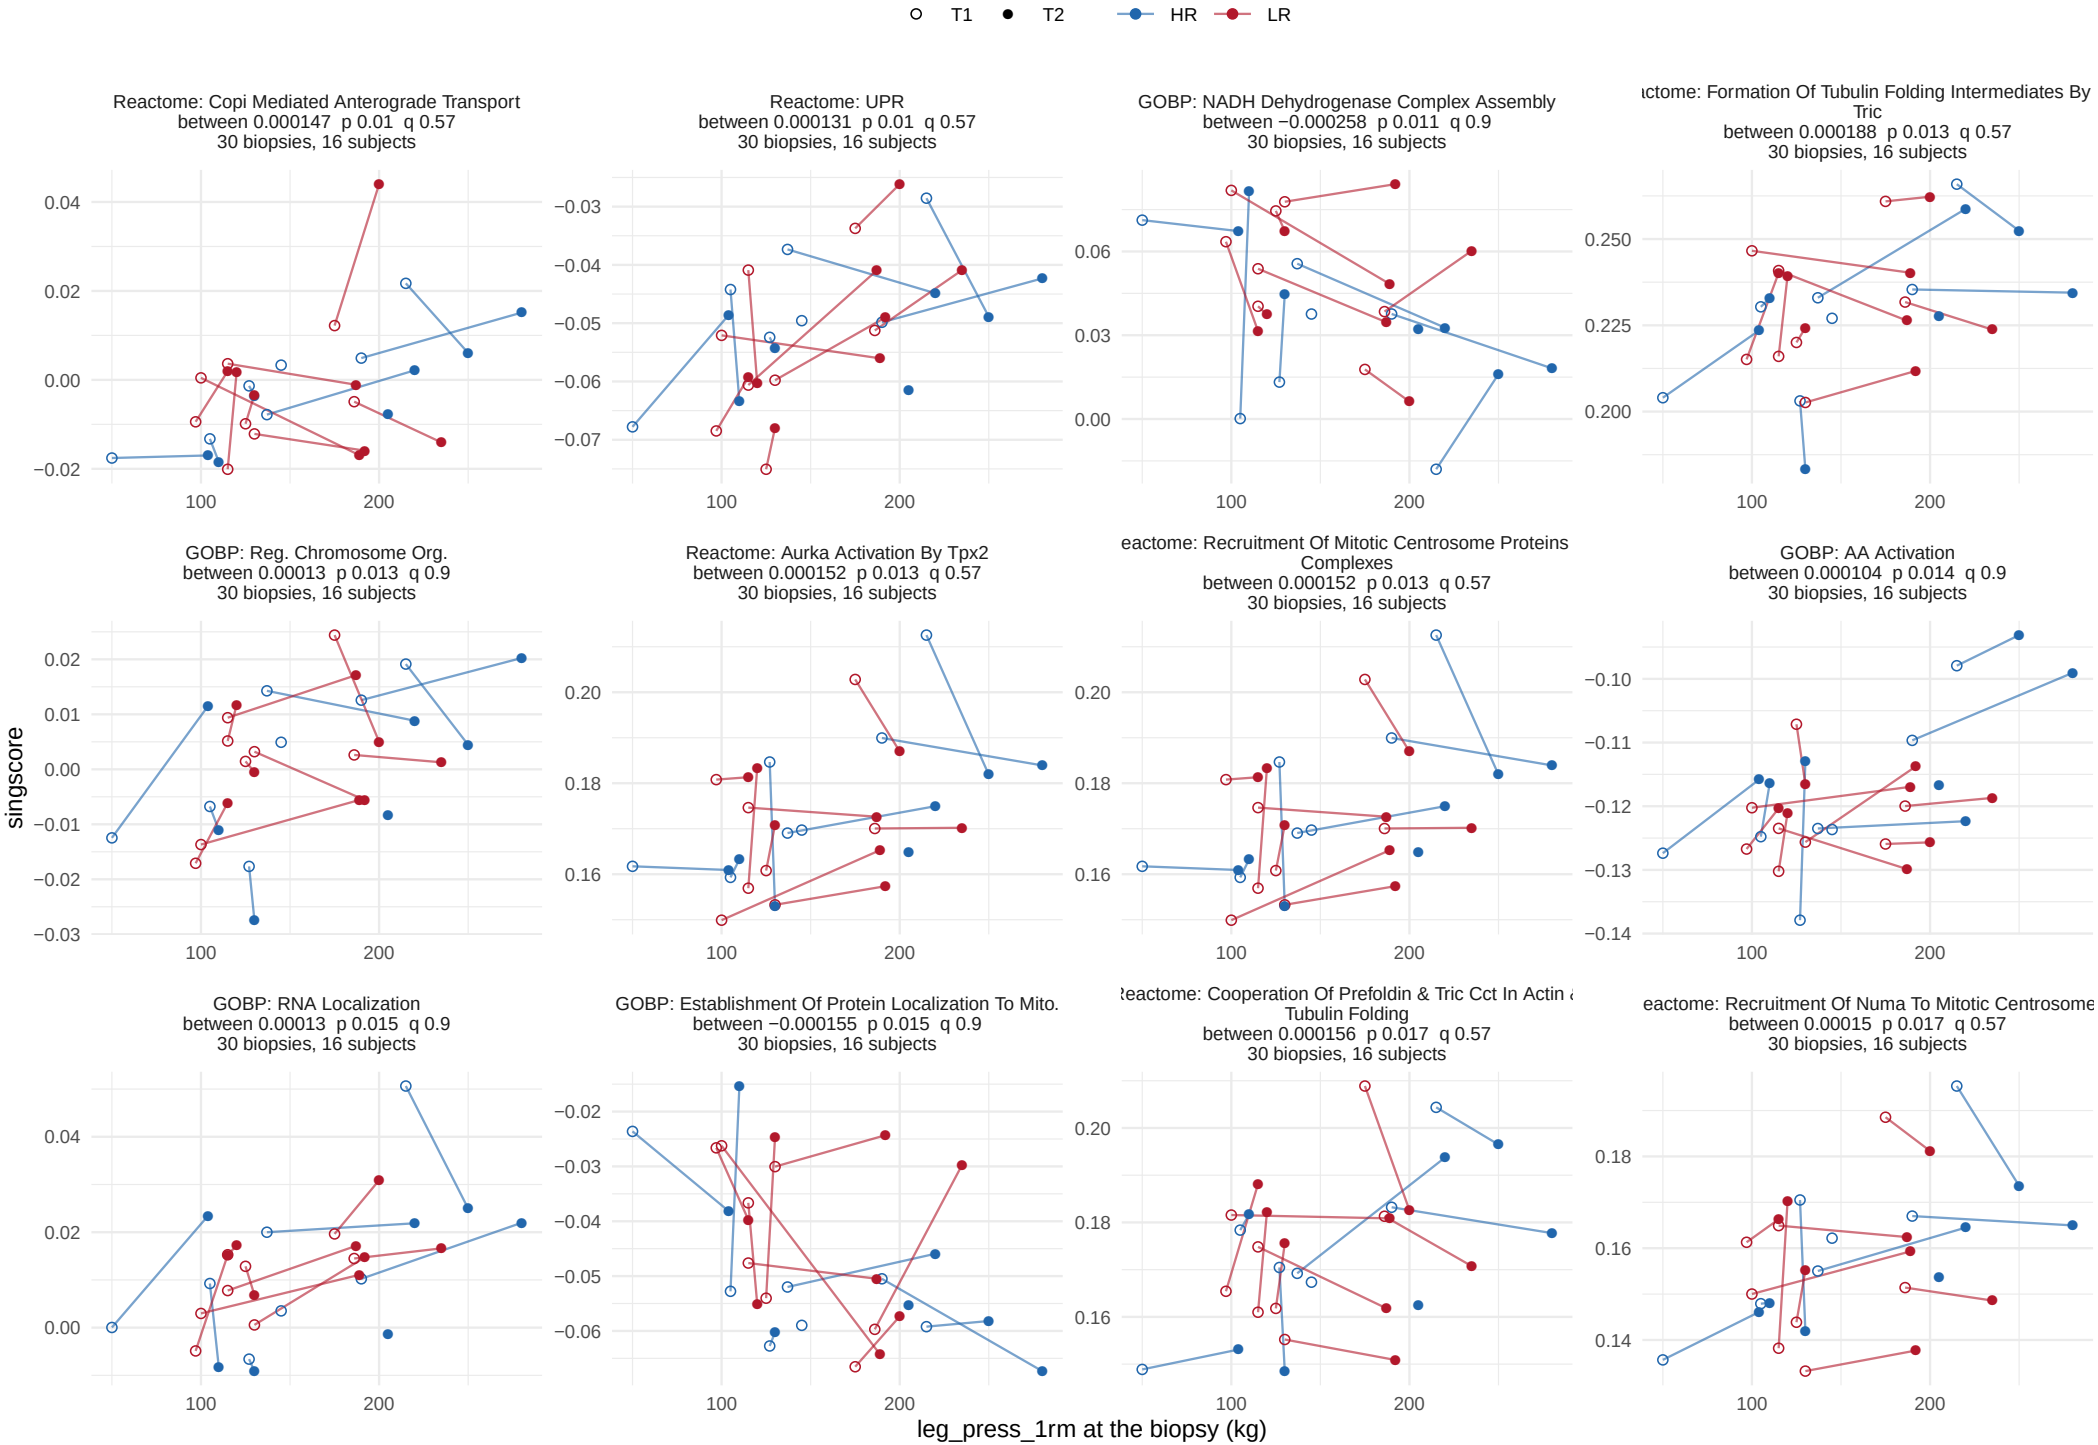

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/05_associate.xlsx, model.

leg_press_1rm, between−person term


64 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 3 of 6.

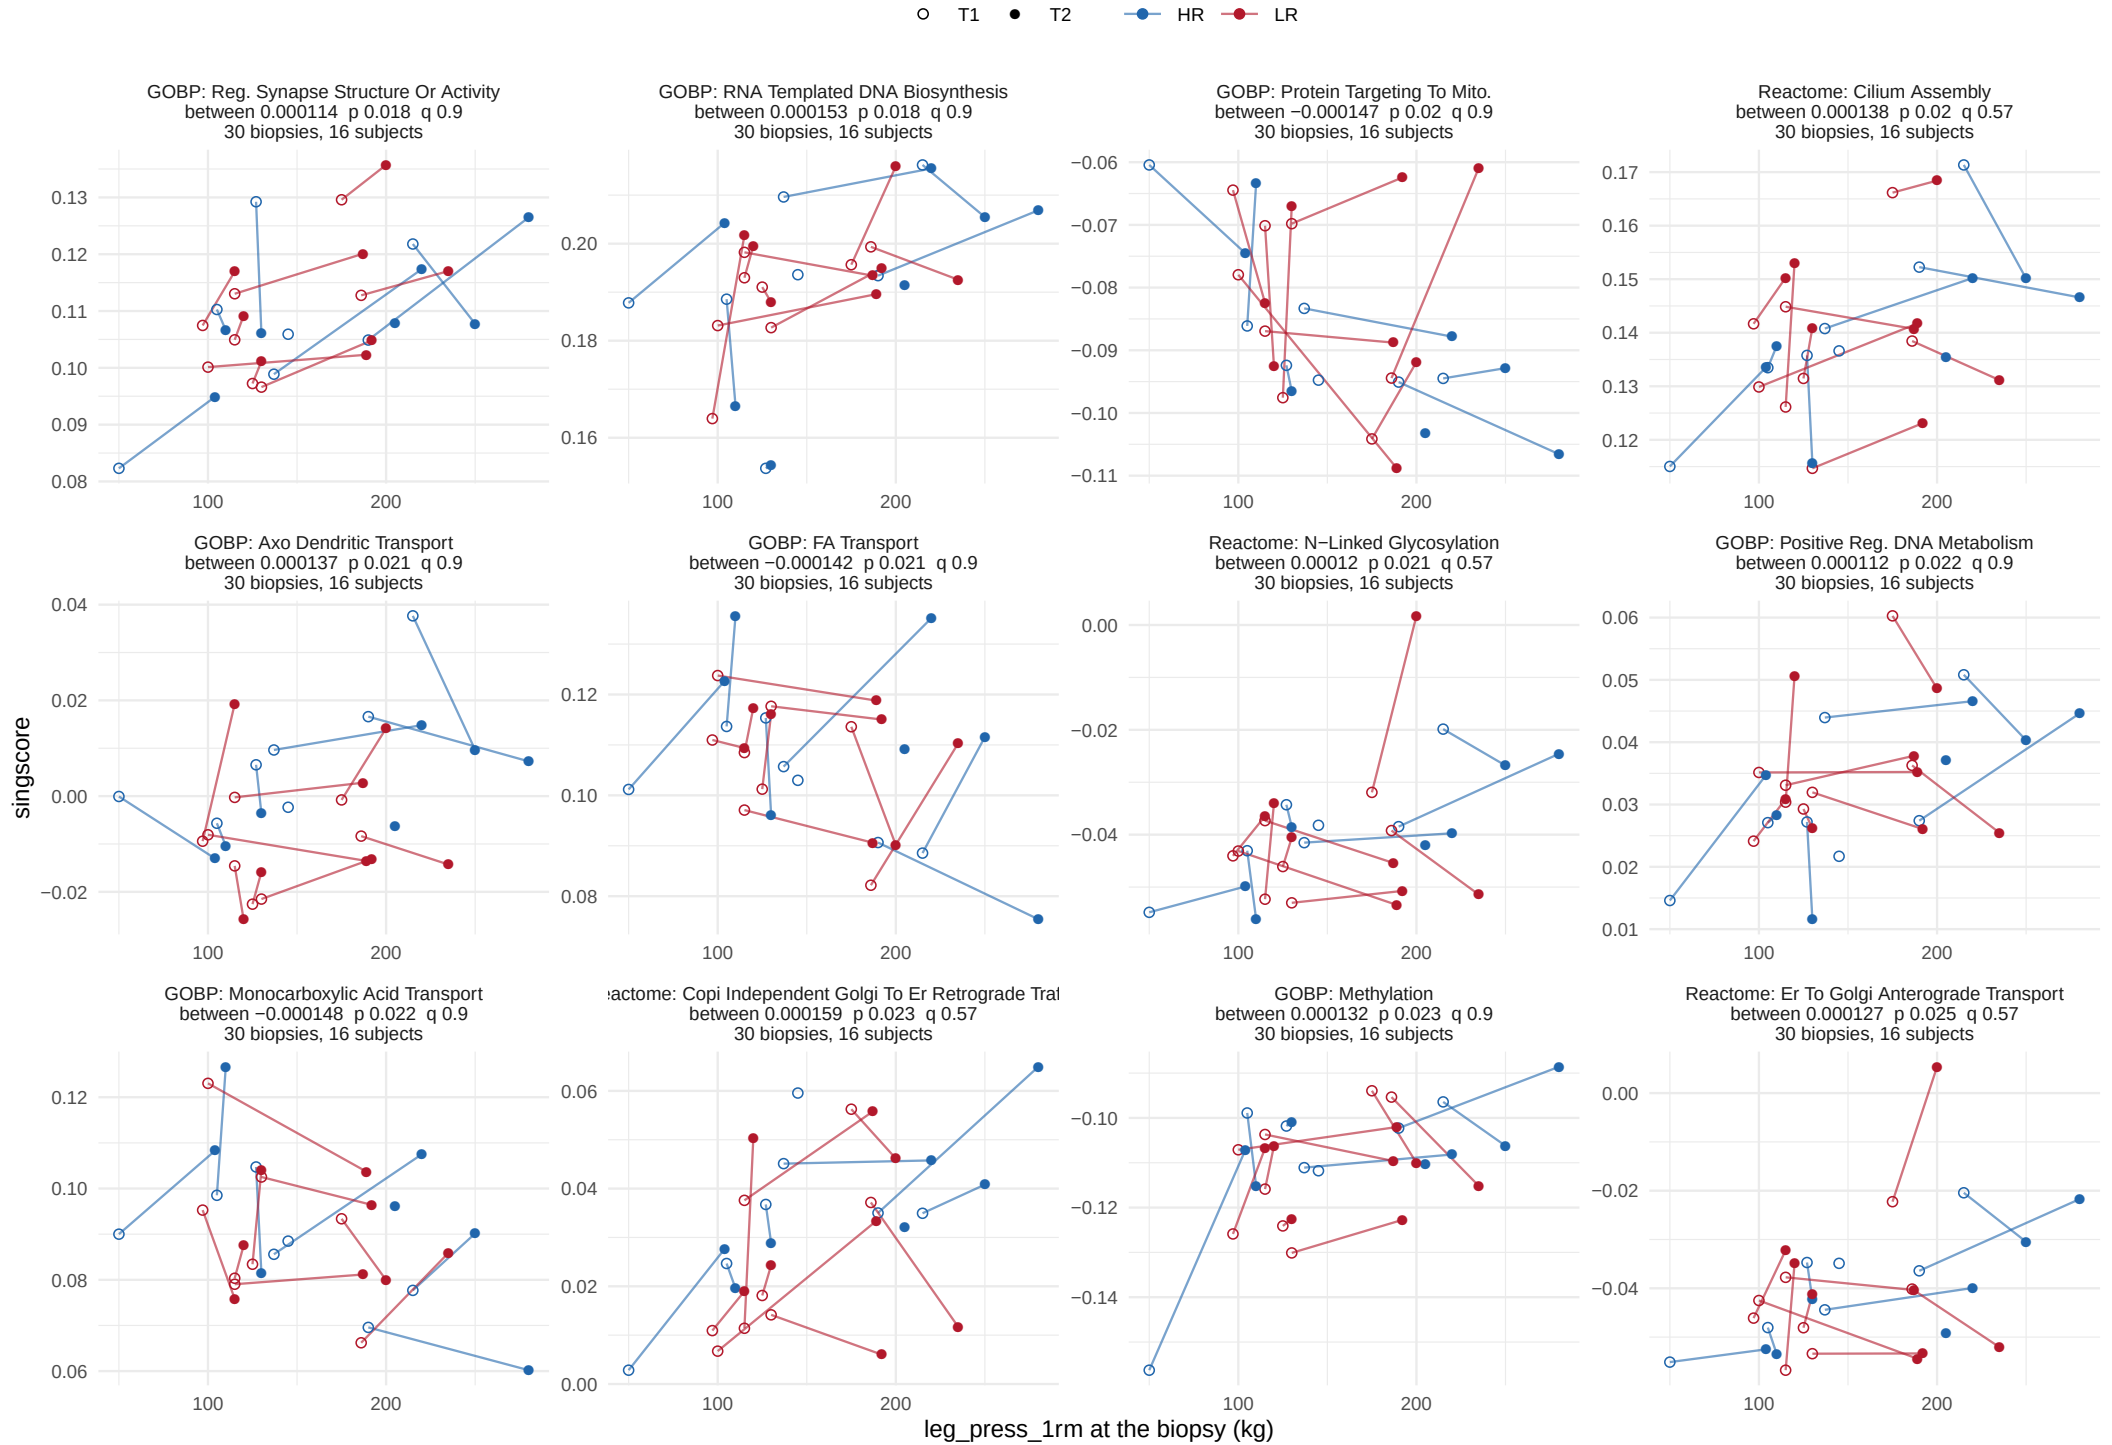

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/05_associate.xlsx, model.

leg_press_1rm, between−person term


64 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 4 of 6.

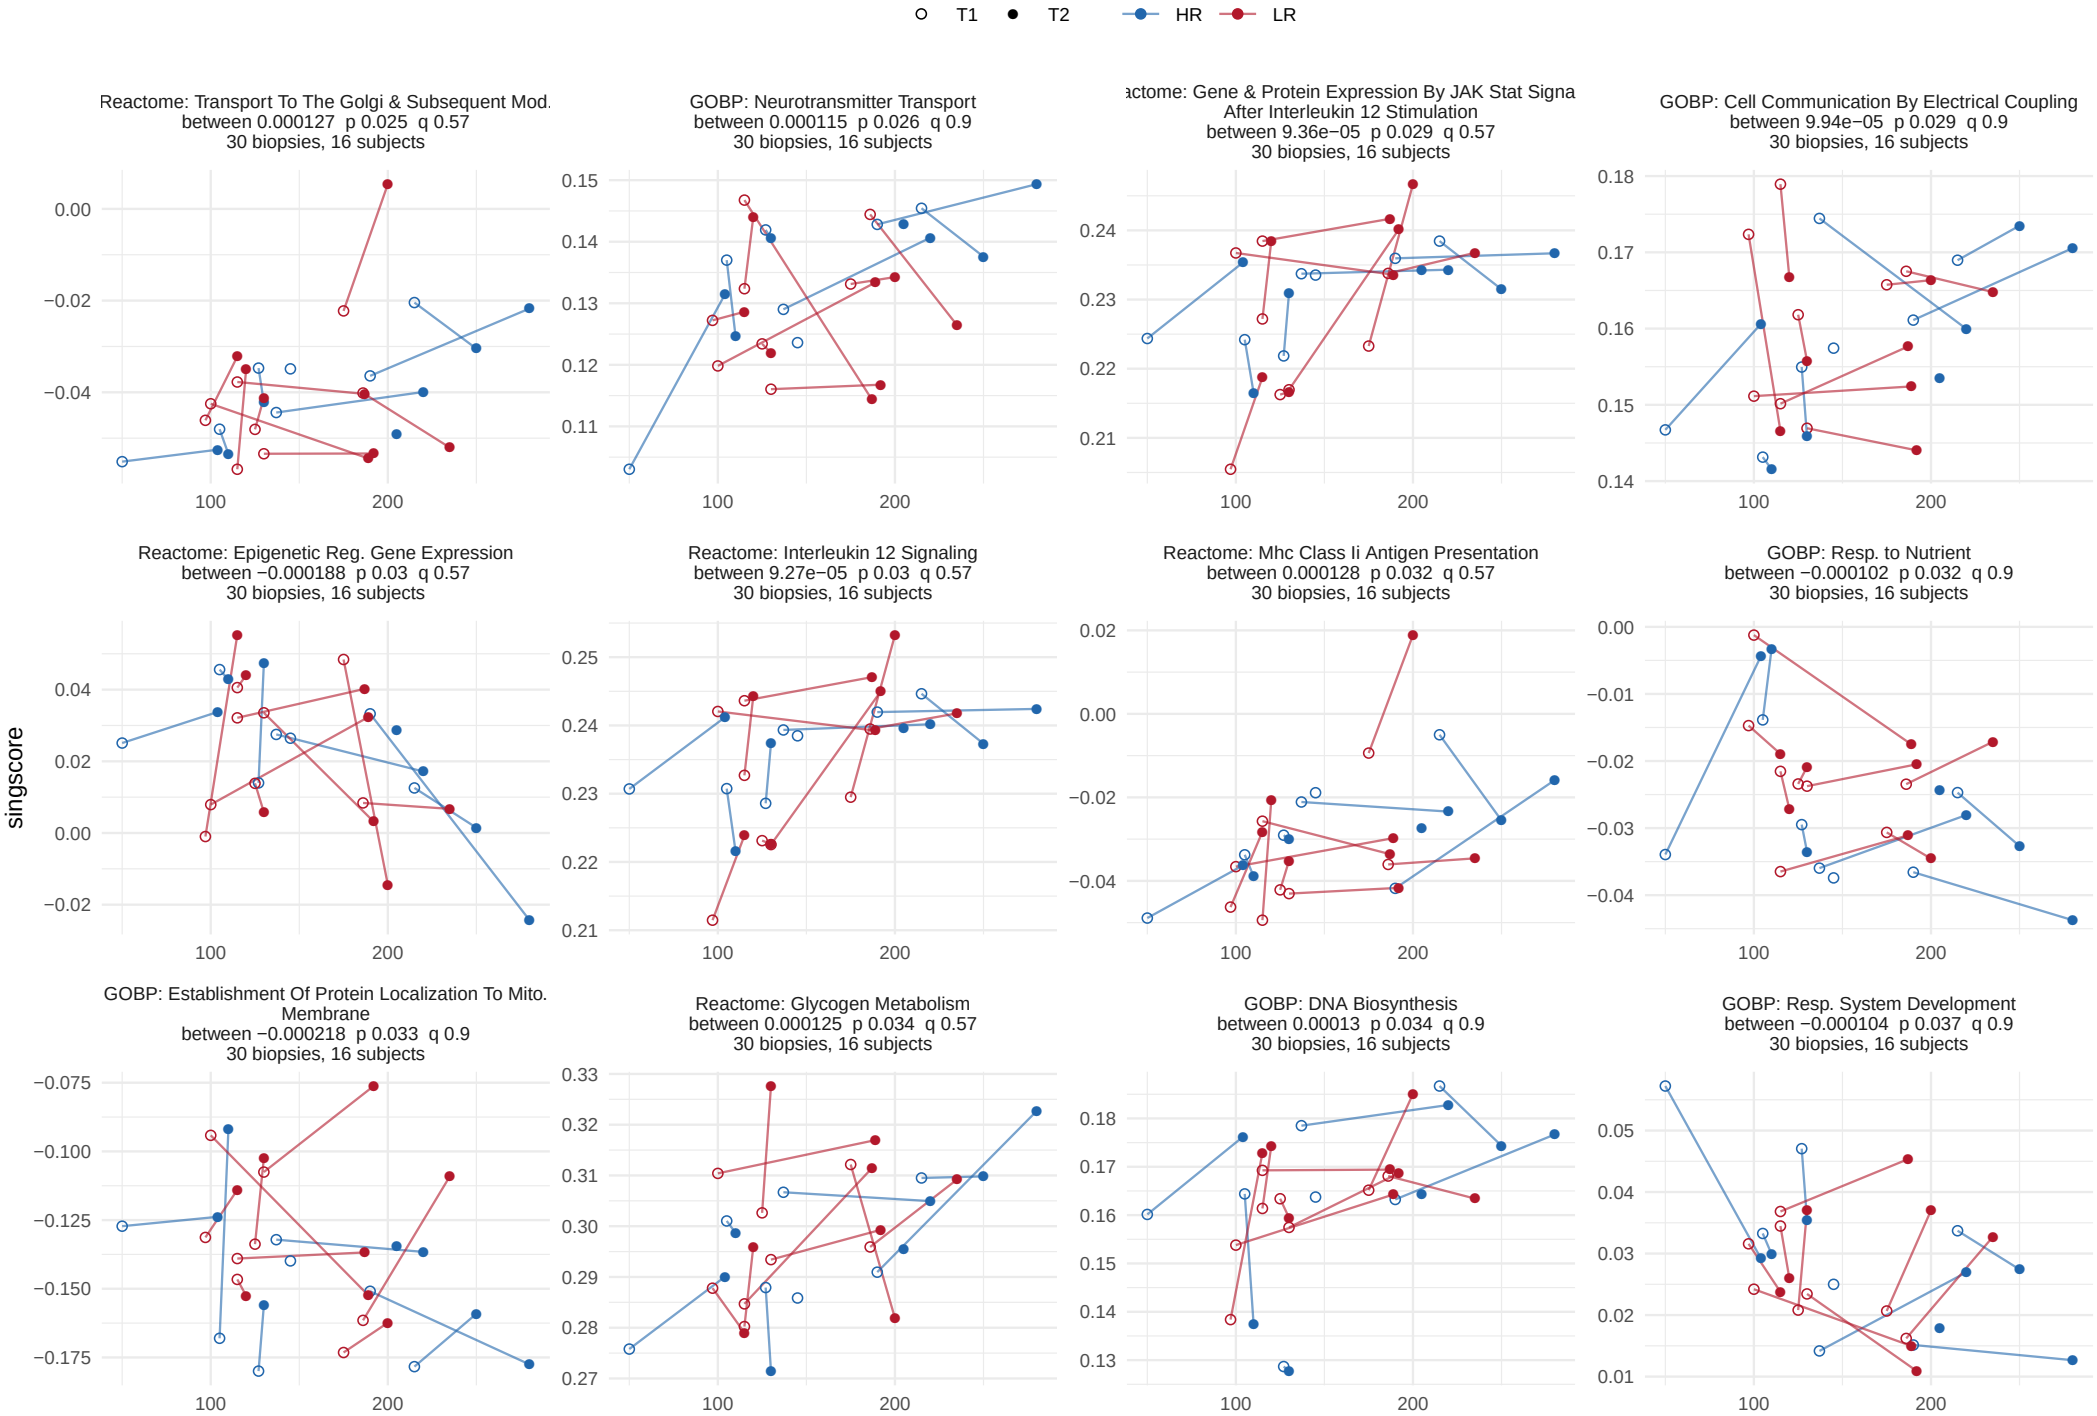

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/05_associate.xlsx, model.

leg_press_1rm, between−person term


64 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 5 of 6.

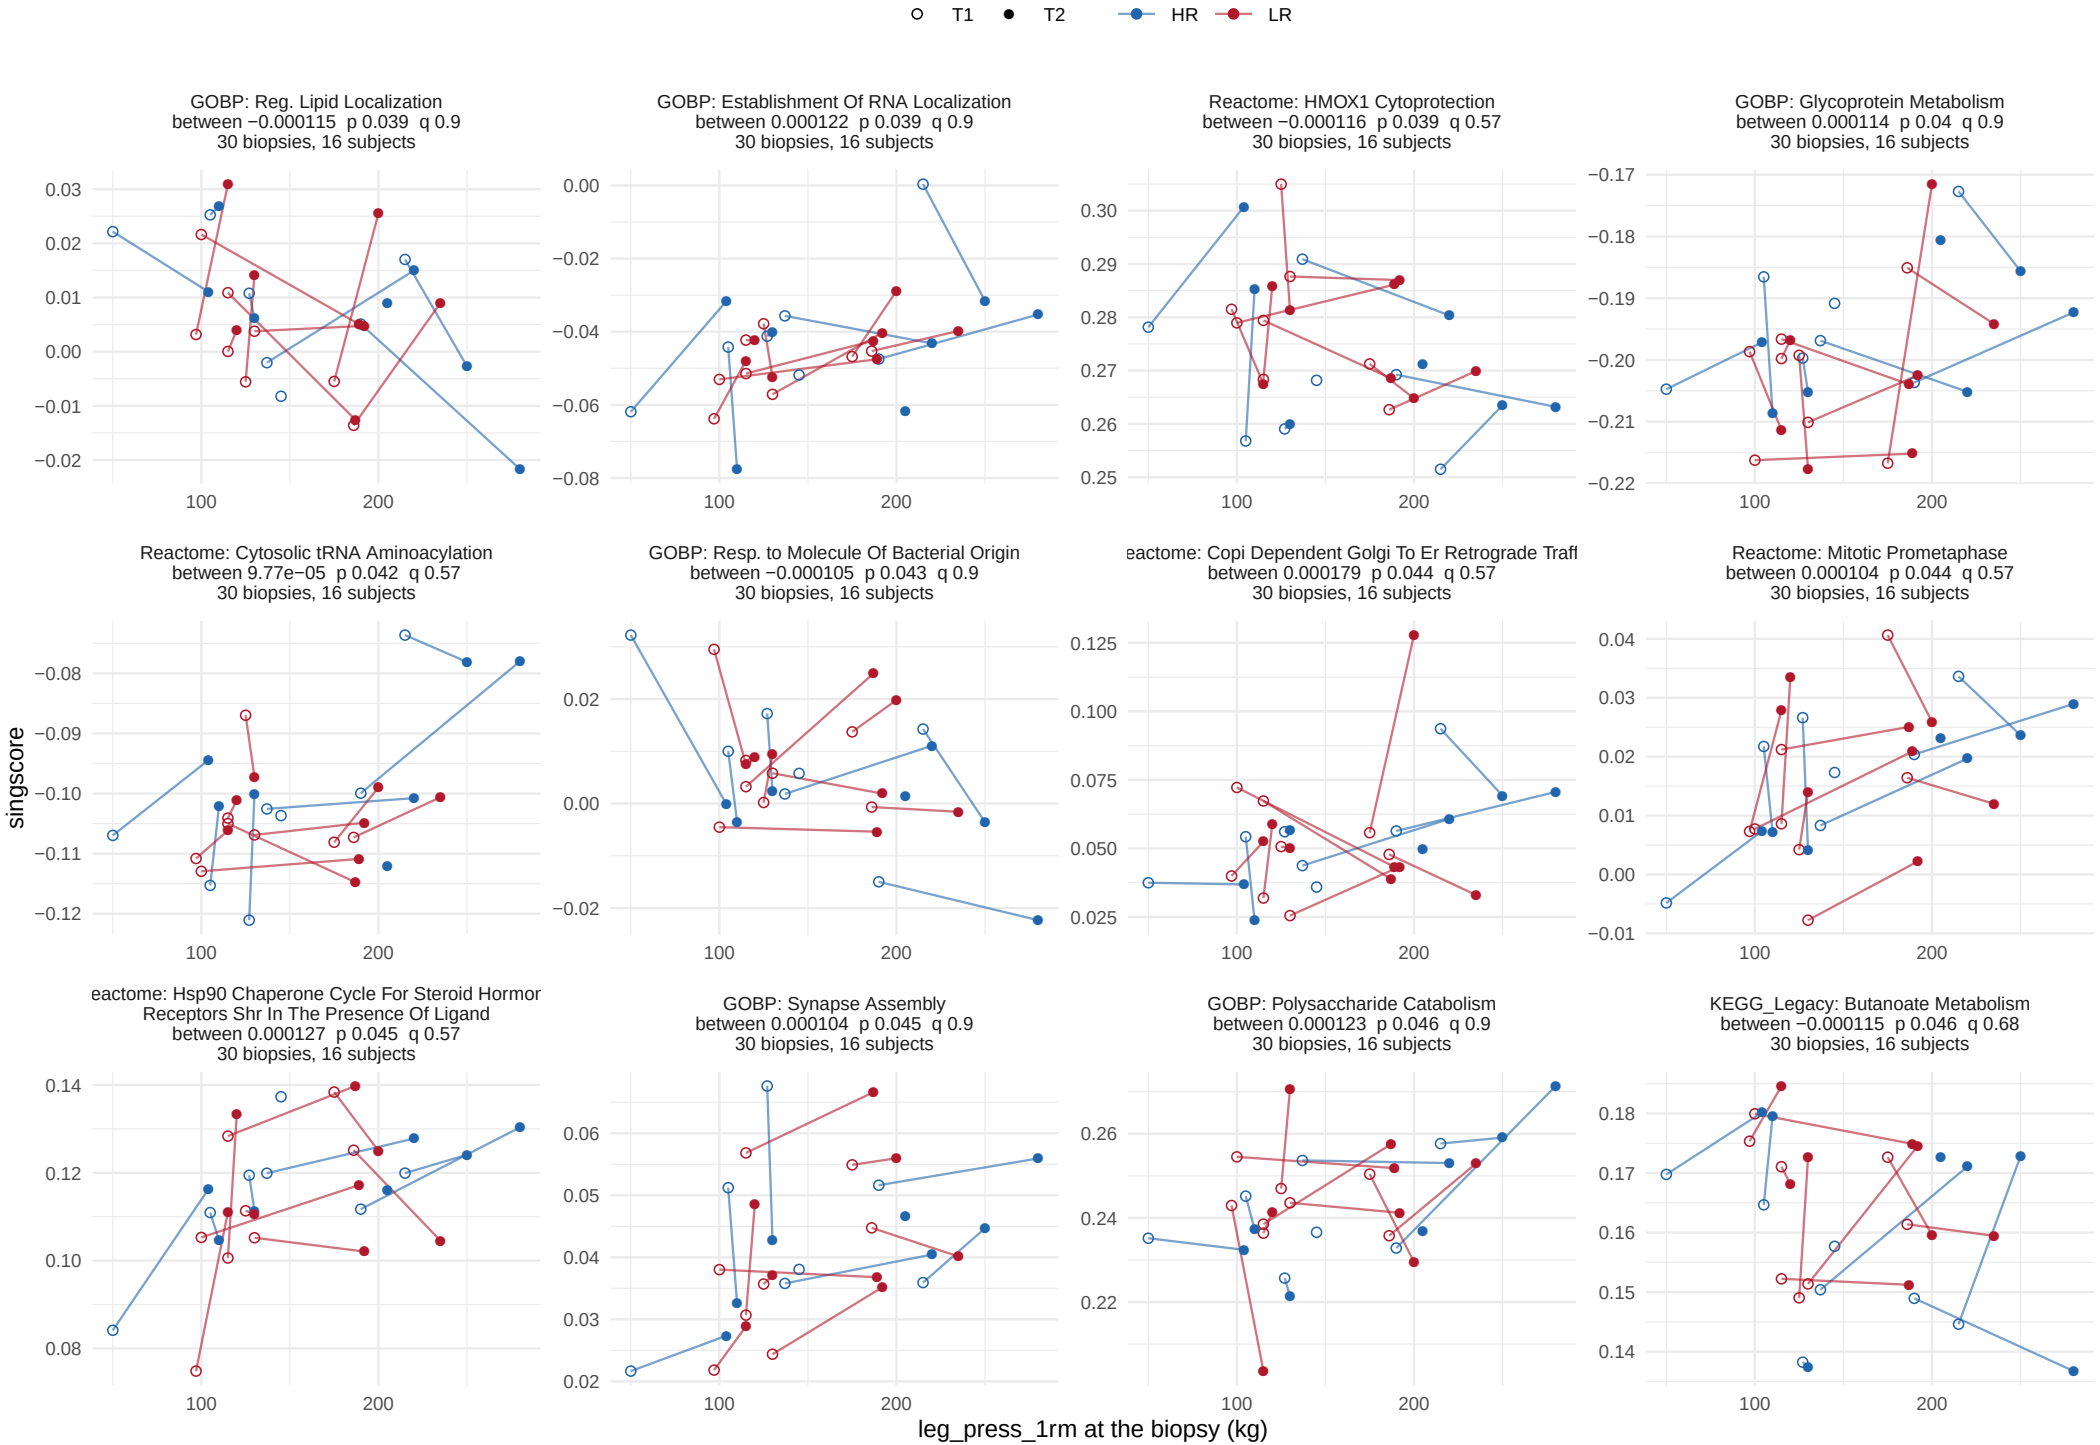

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/05_associate.xlsx, model.

leg_press_1rm, between−person term


64 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 6 of 6.

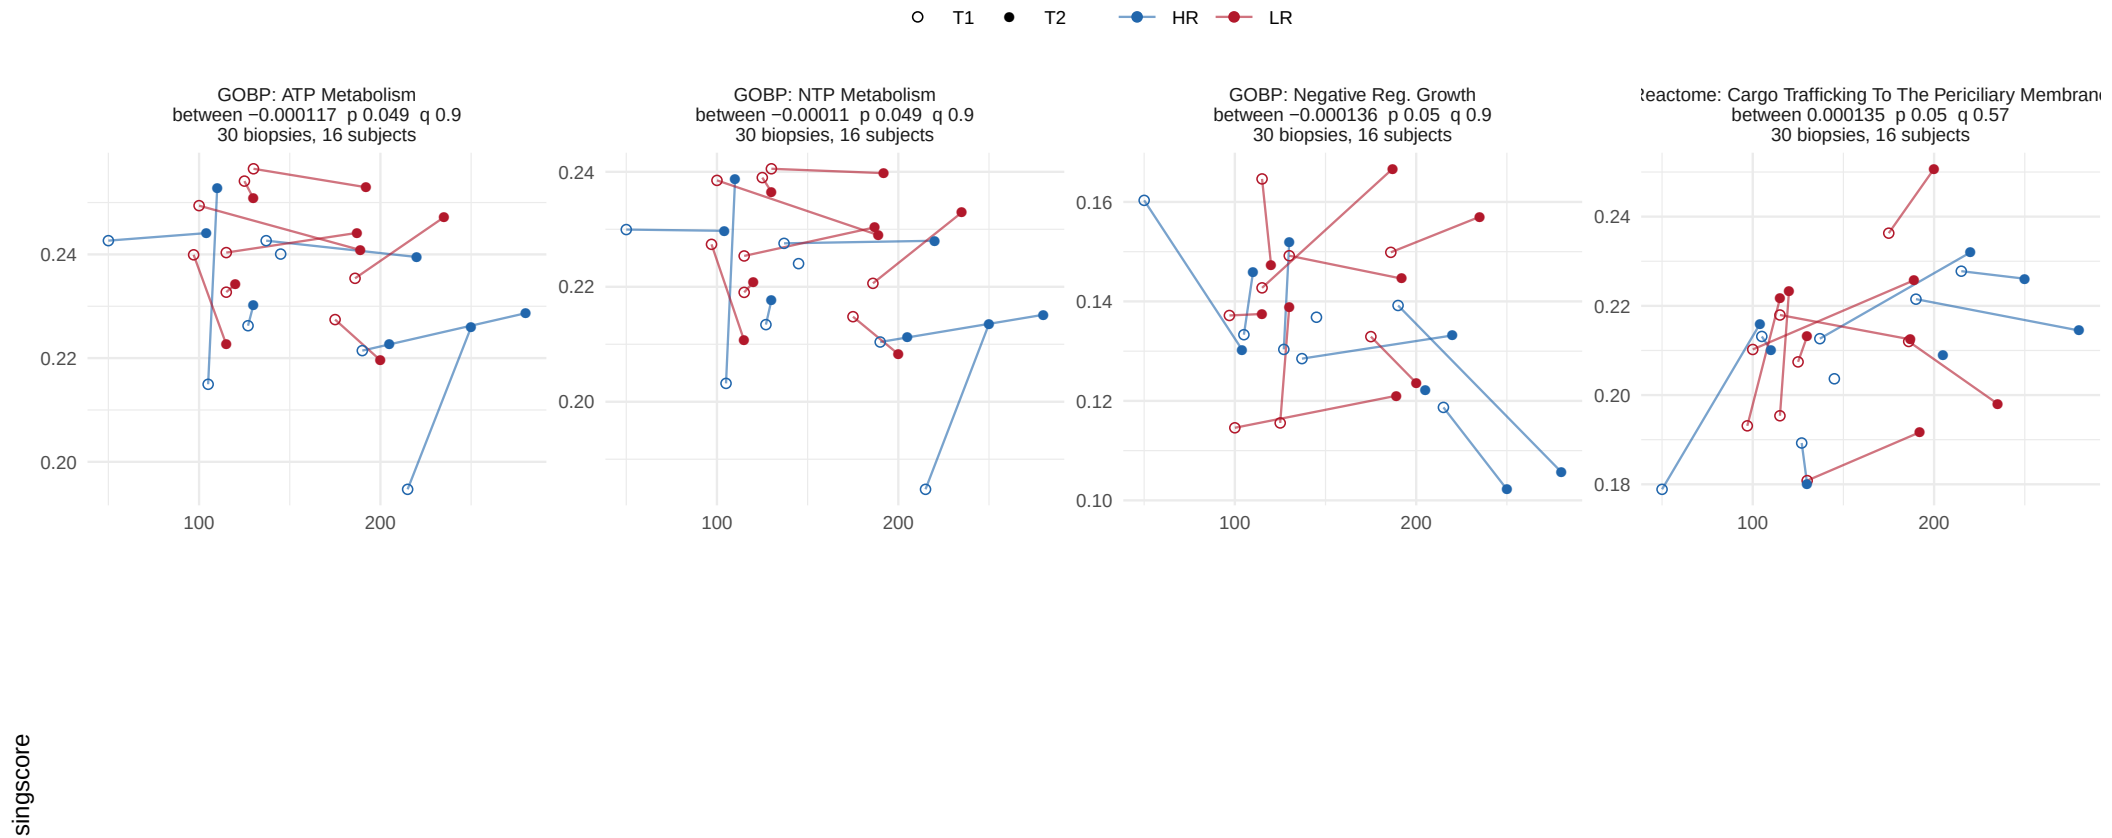

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/05_associate.xlsx, model.

leg_ext_1rm, within−person term


78 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 1 of 7.

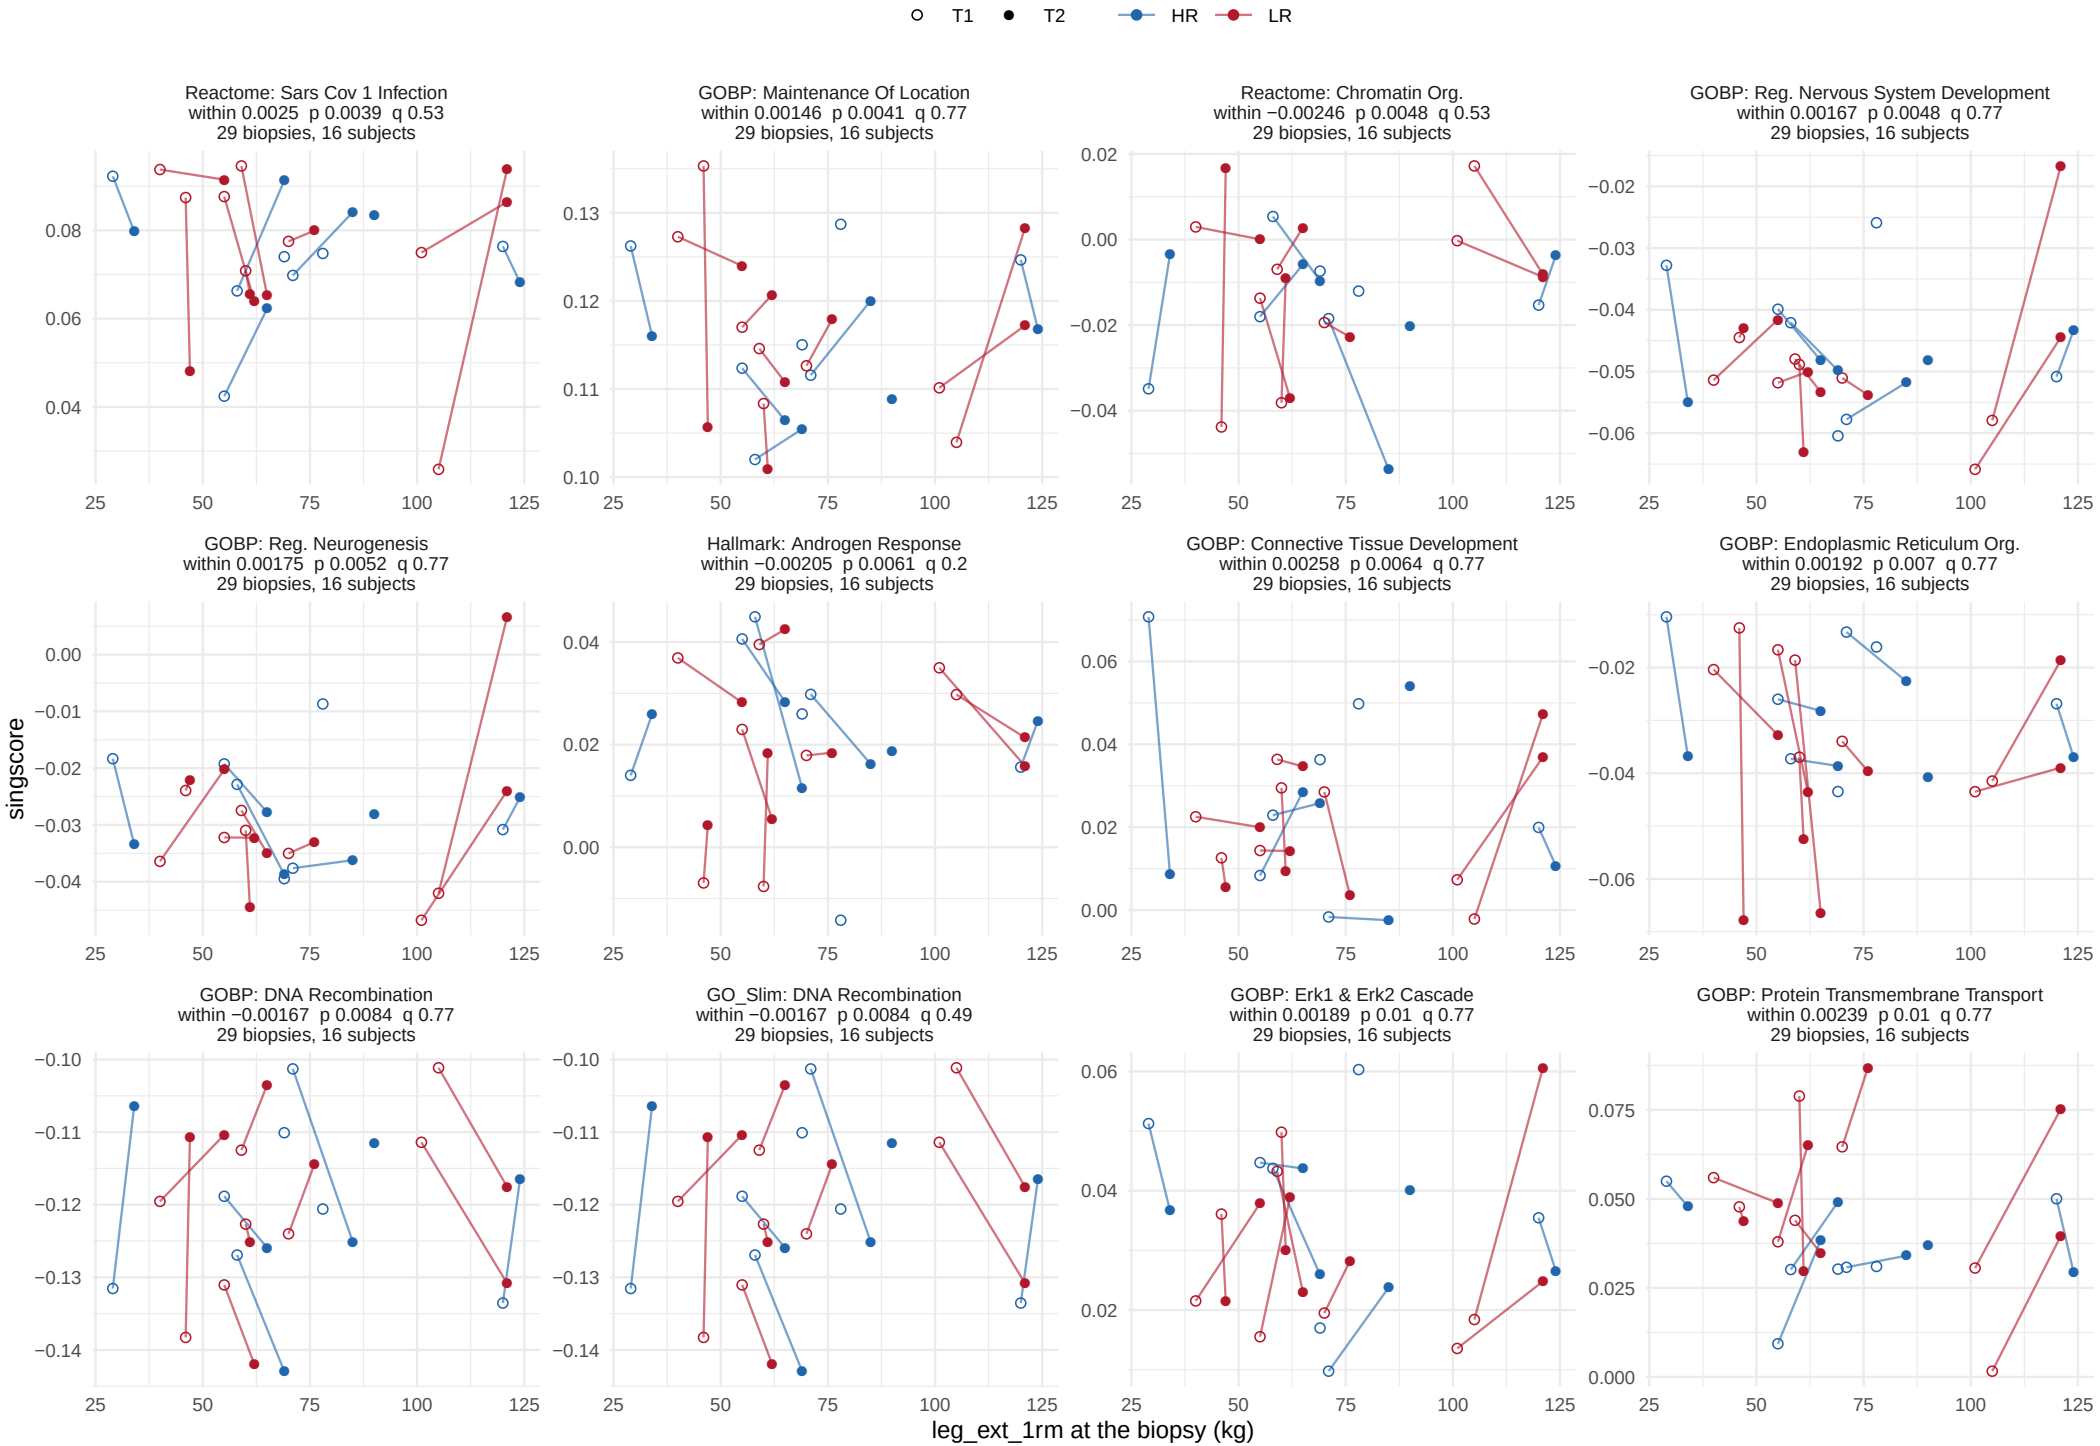

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/05_associate.xlsx, model.

leg_ext_1rm, within−person term


78 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 2 of 7.

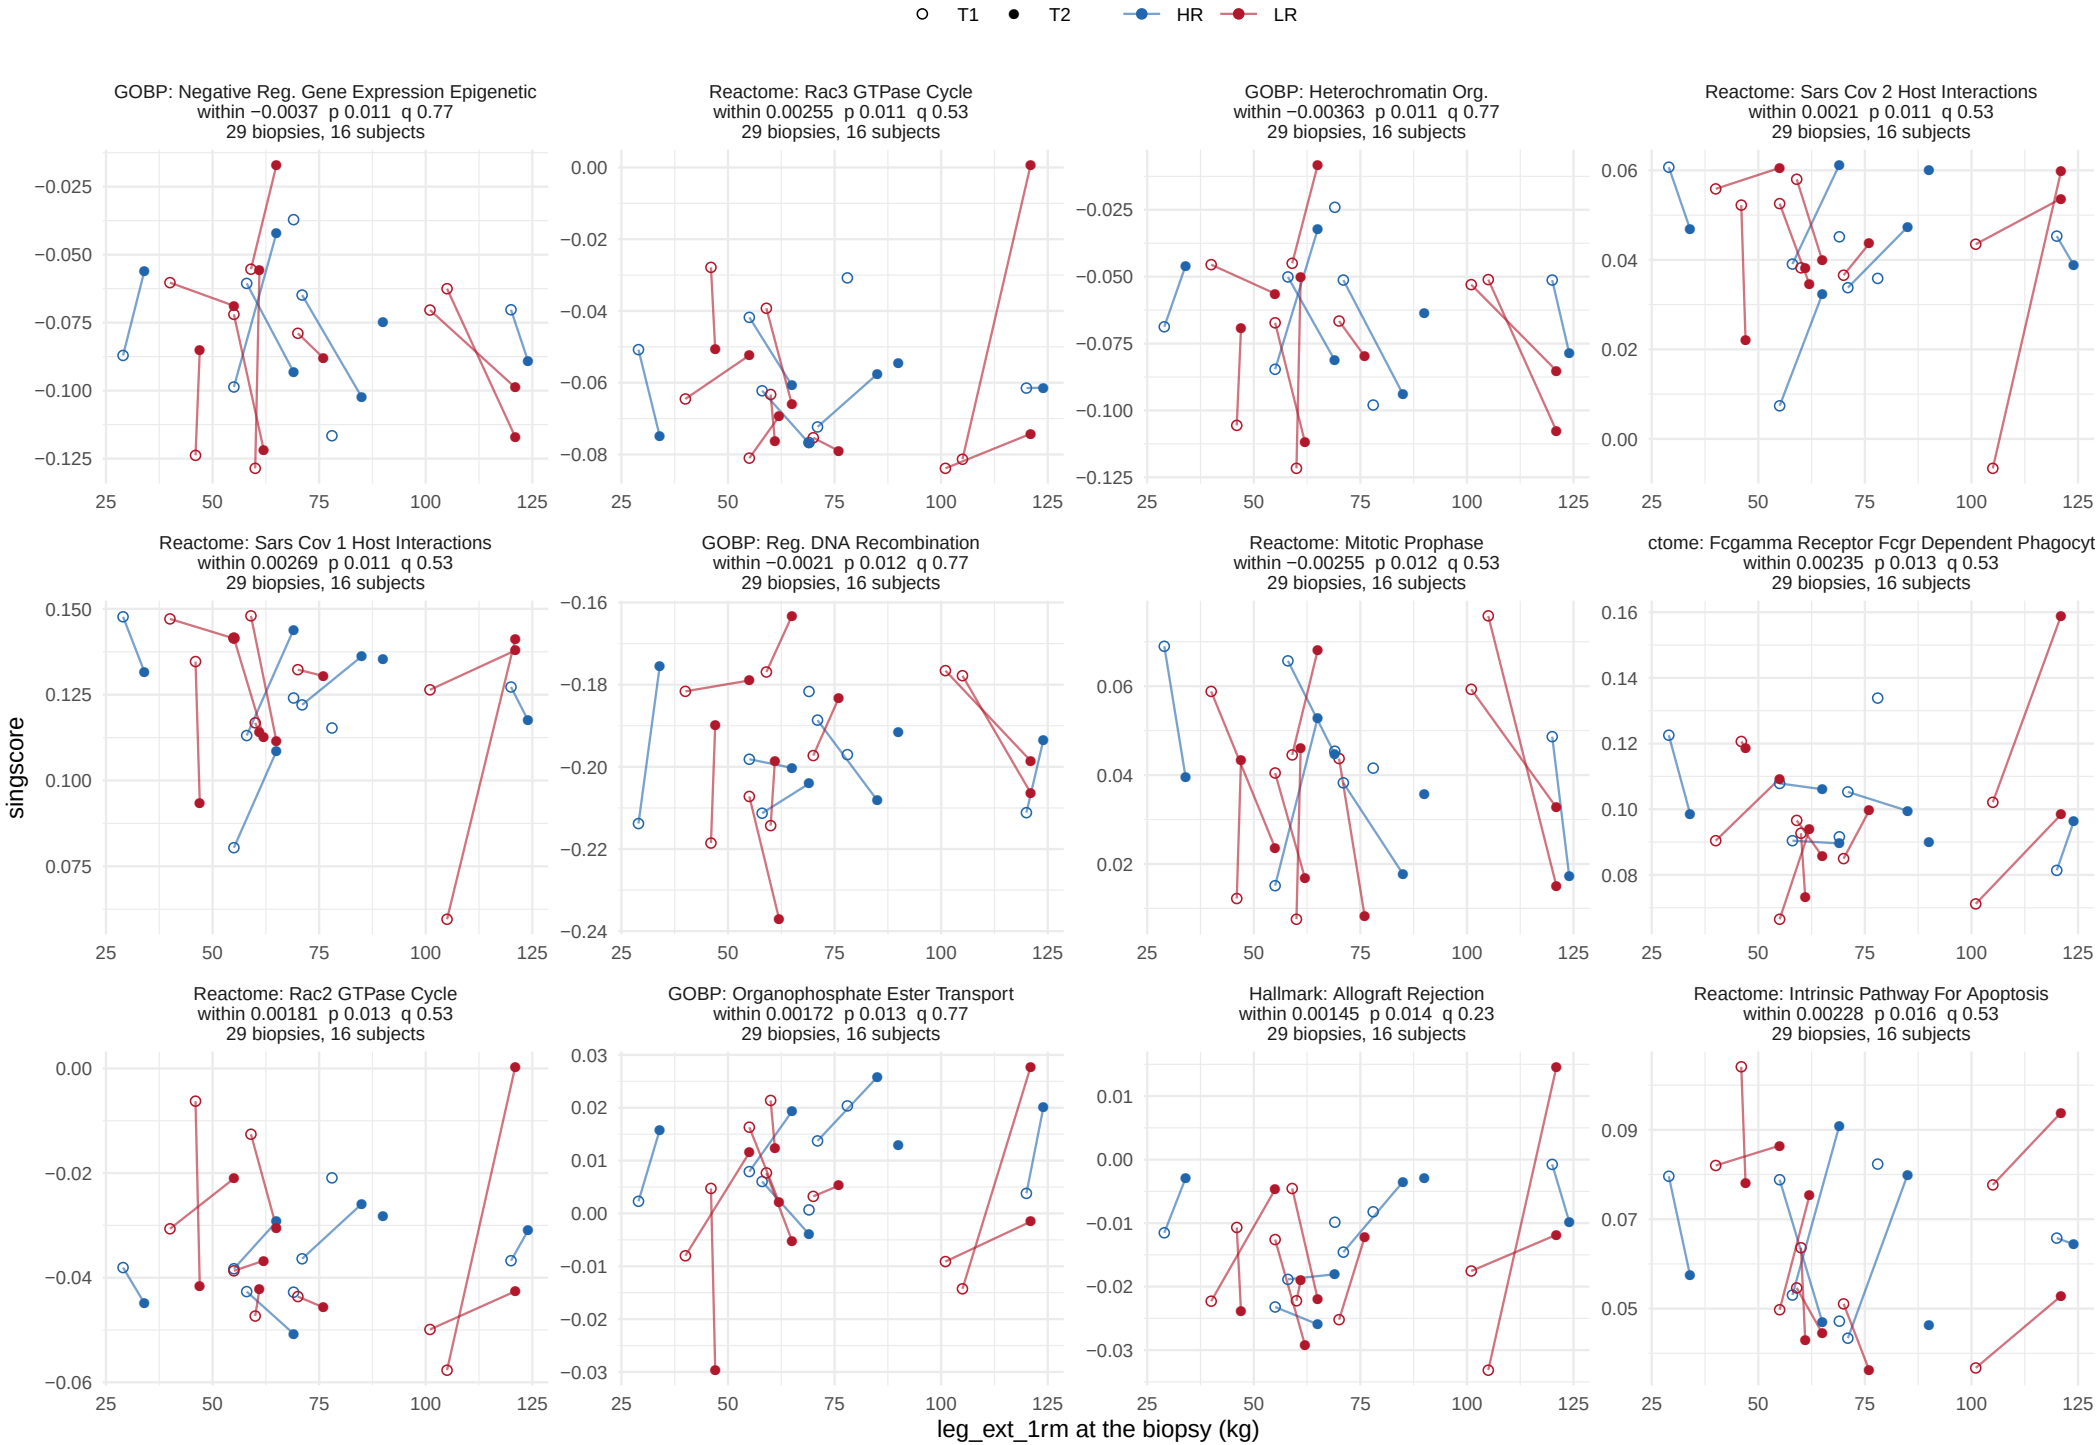

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/05_associate.xlsx, model.

leg_ext_1rm, within−person term


78 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 3 of 7.

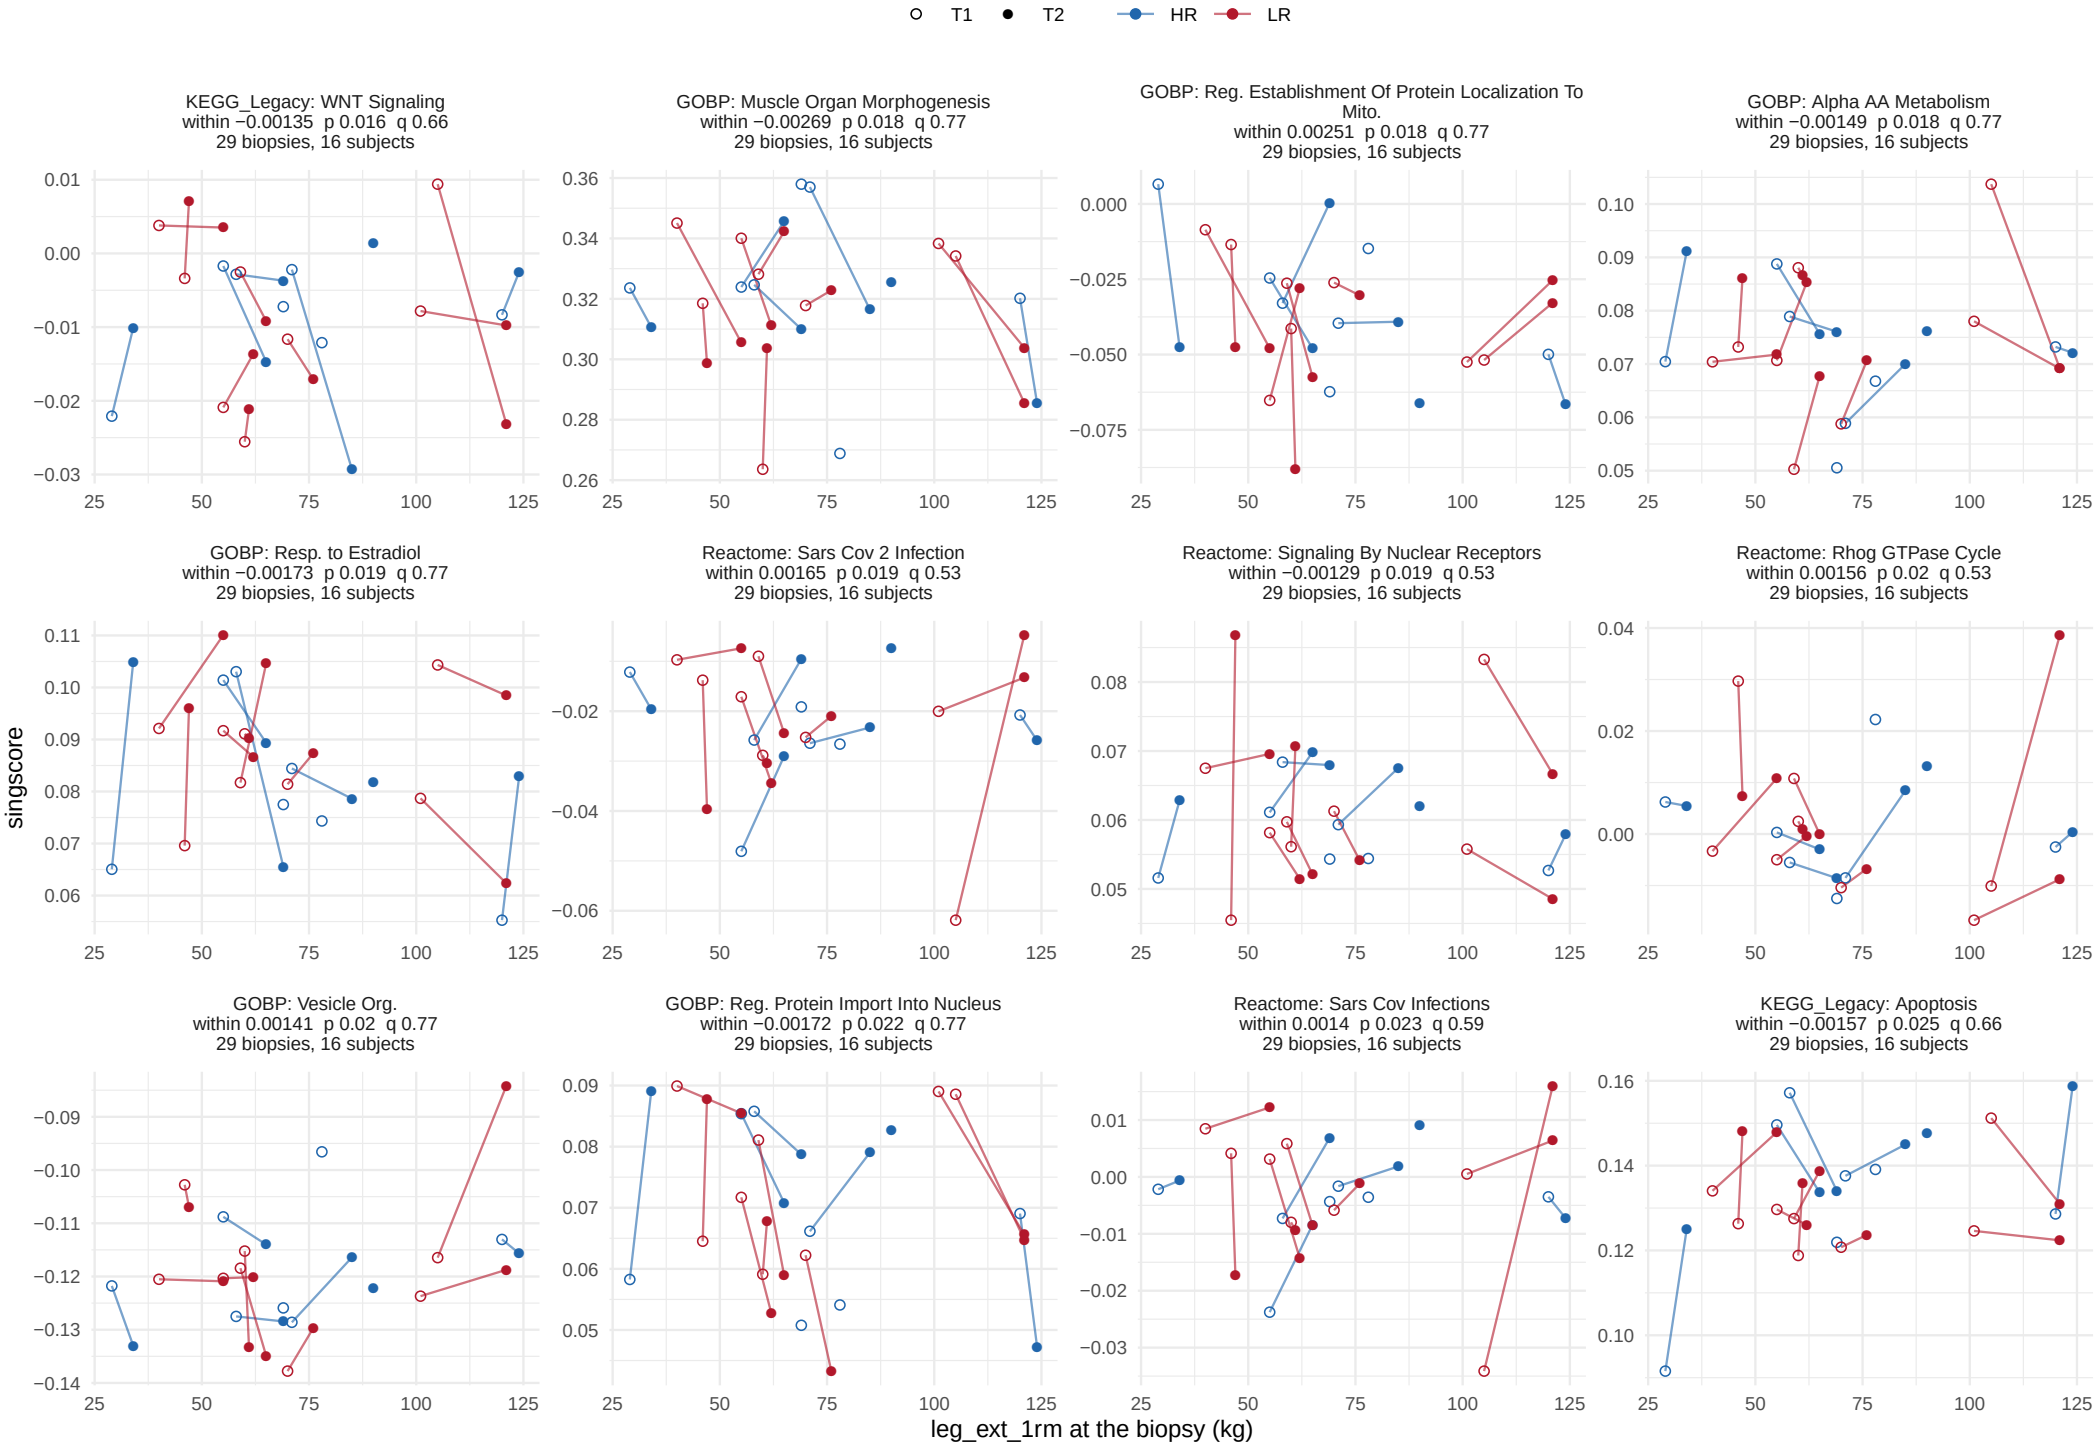

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/05_associate.xlsx, model.

leg_ext_1rm, within−person term


78 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 4 of 7.

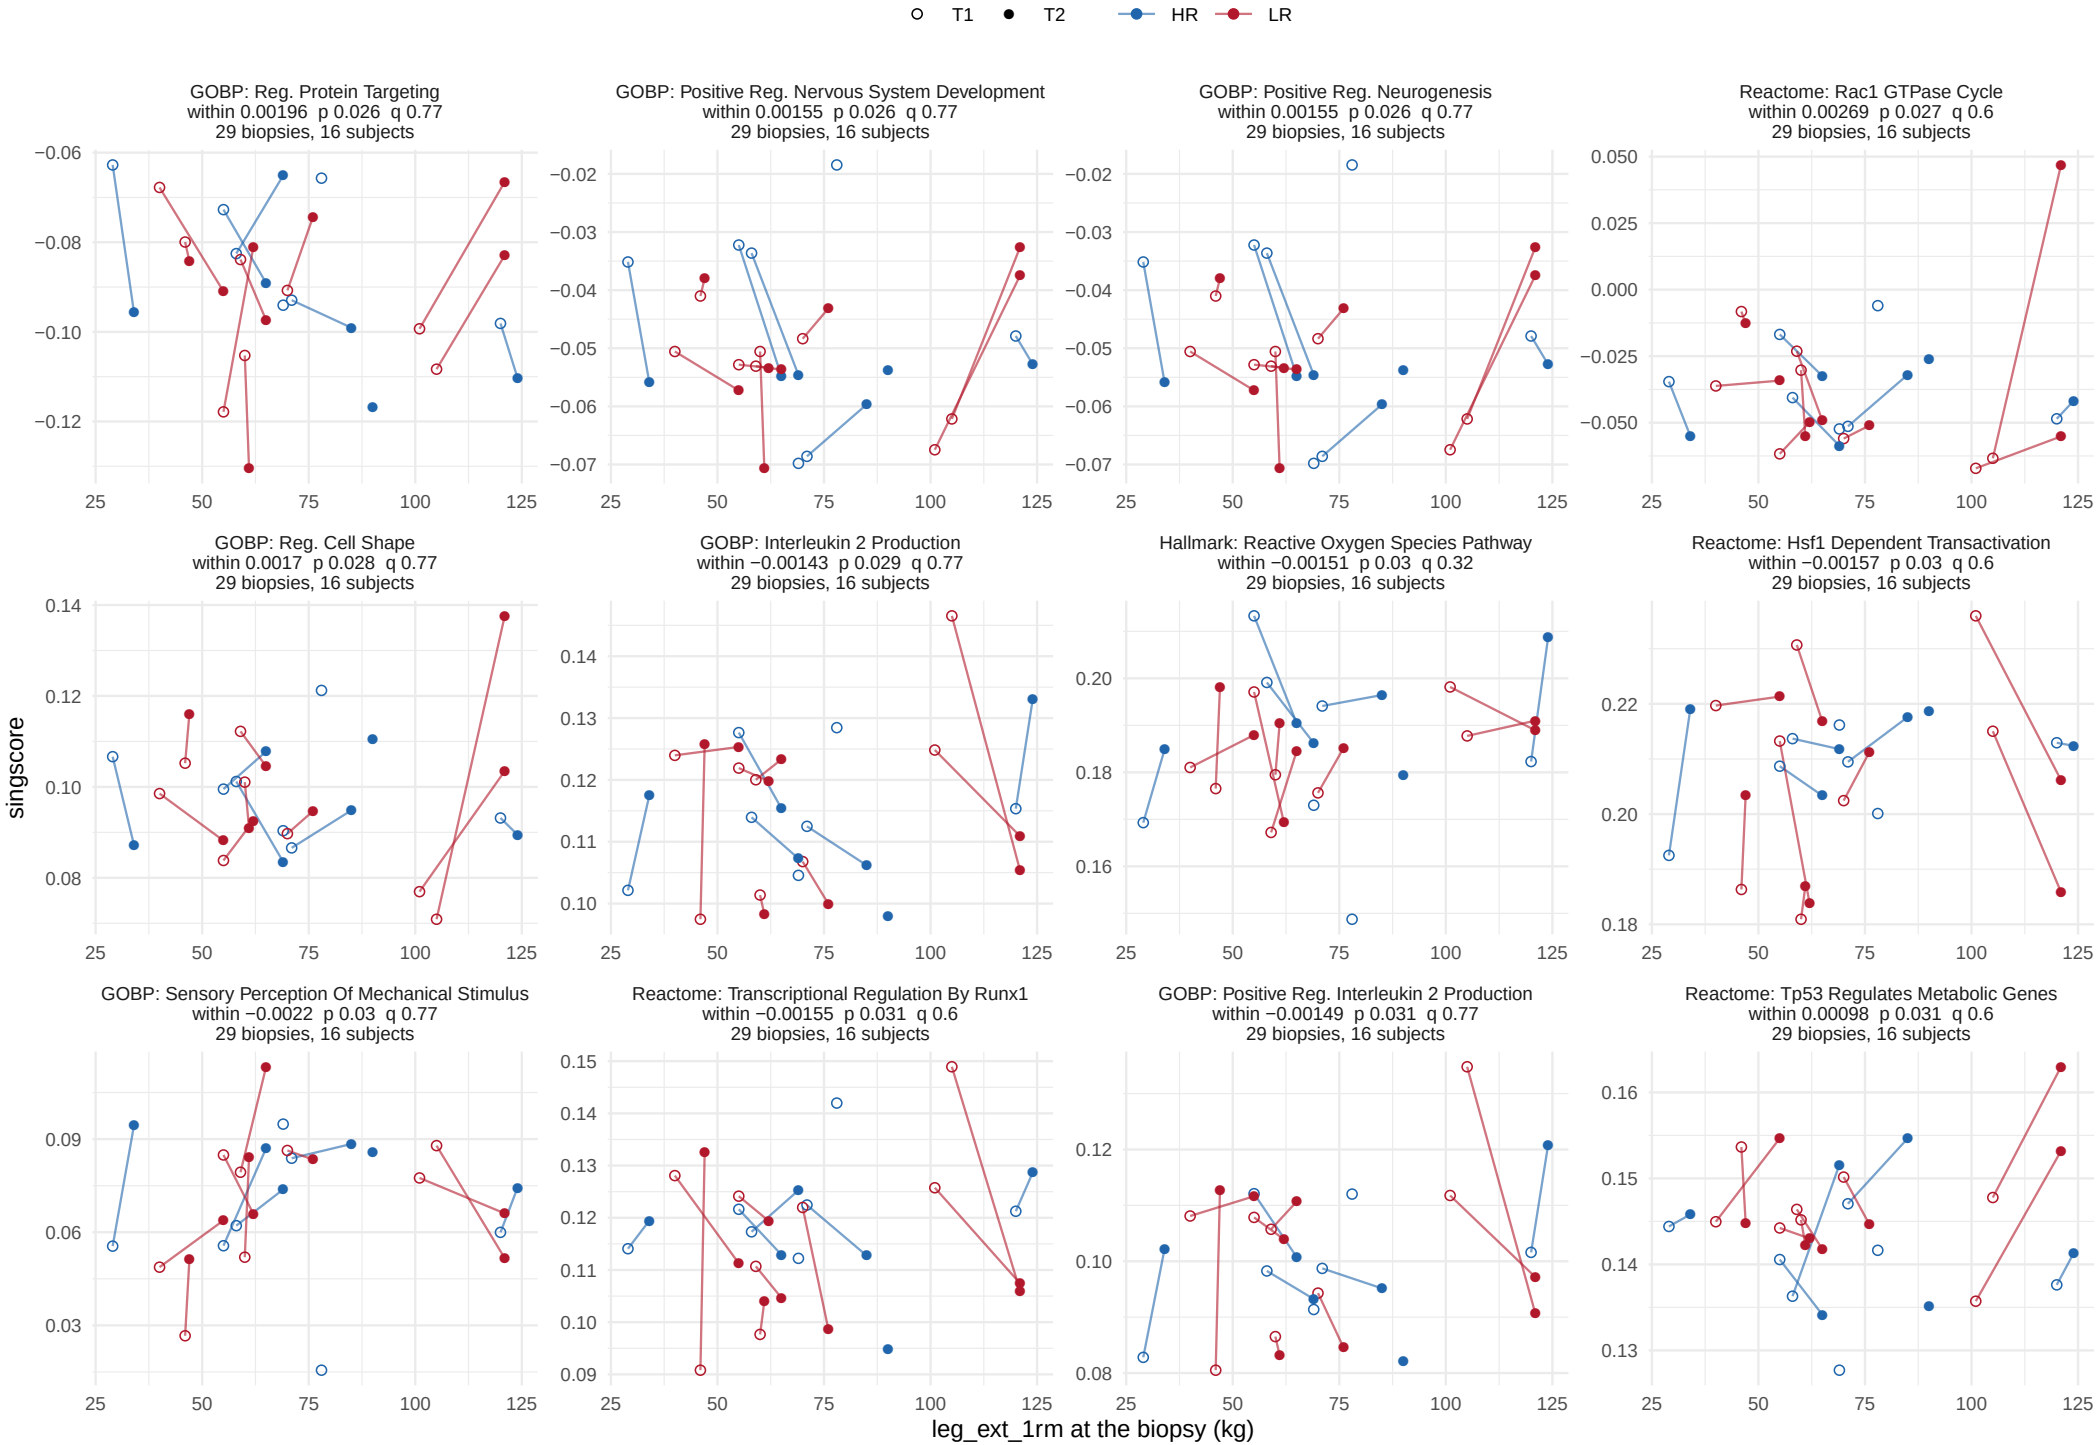

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/05_associate.xlsx, model.

leg_ext_1rm, within−person term


78 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 5 of 7.

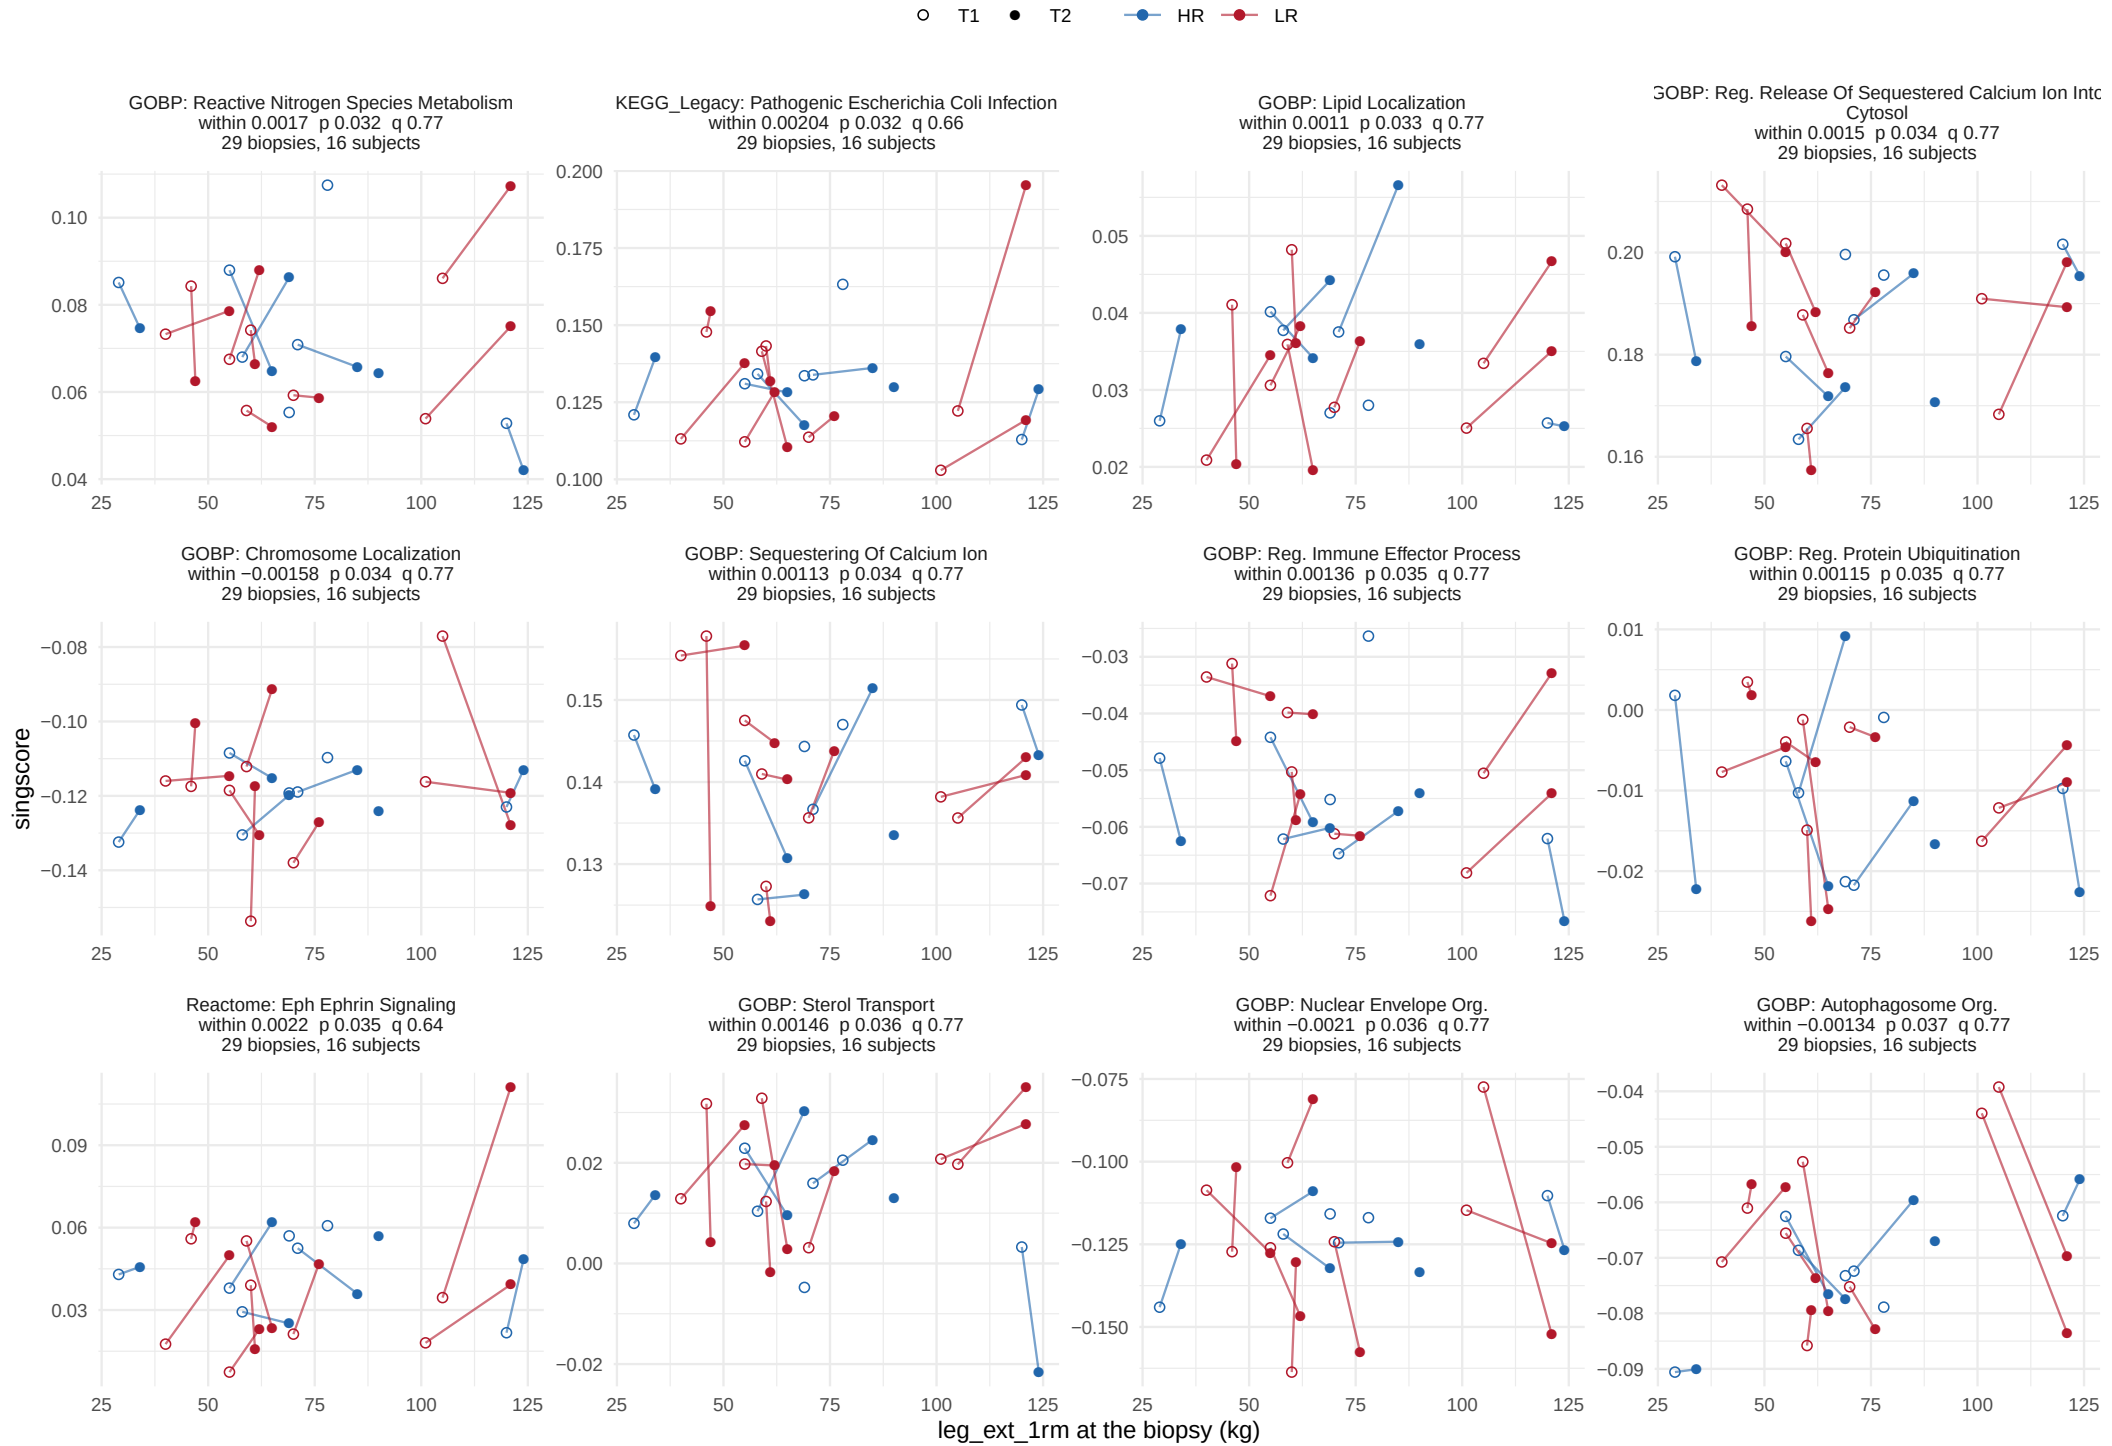

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/05_associate.xlsx, model.

leg_ext_1rm, within−person term


78 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 6 of 7.

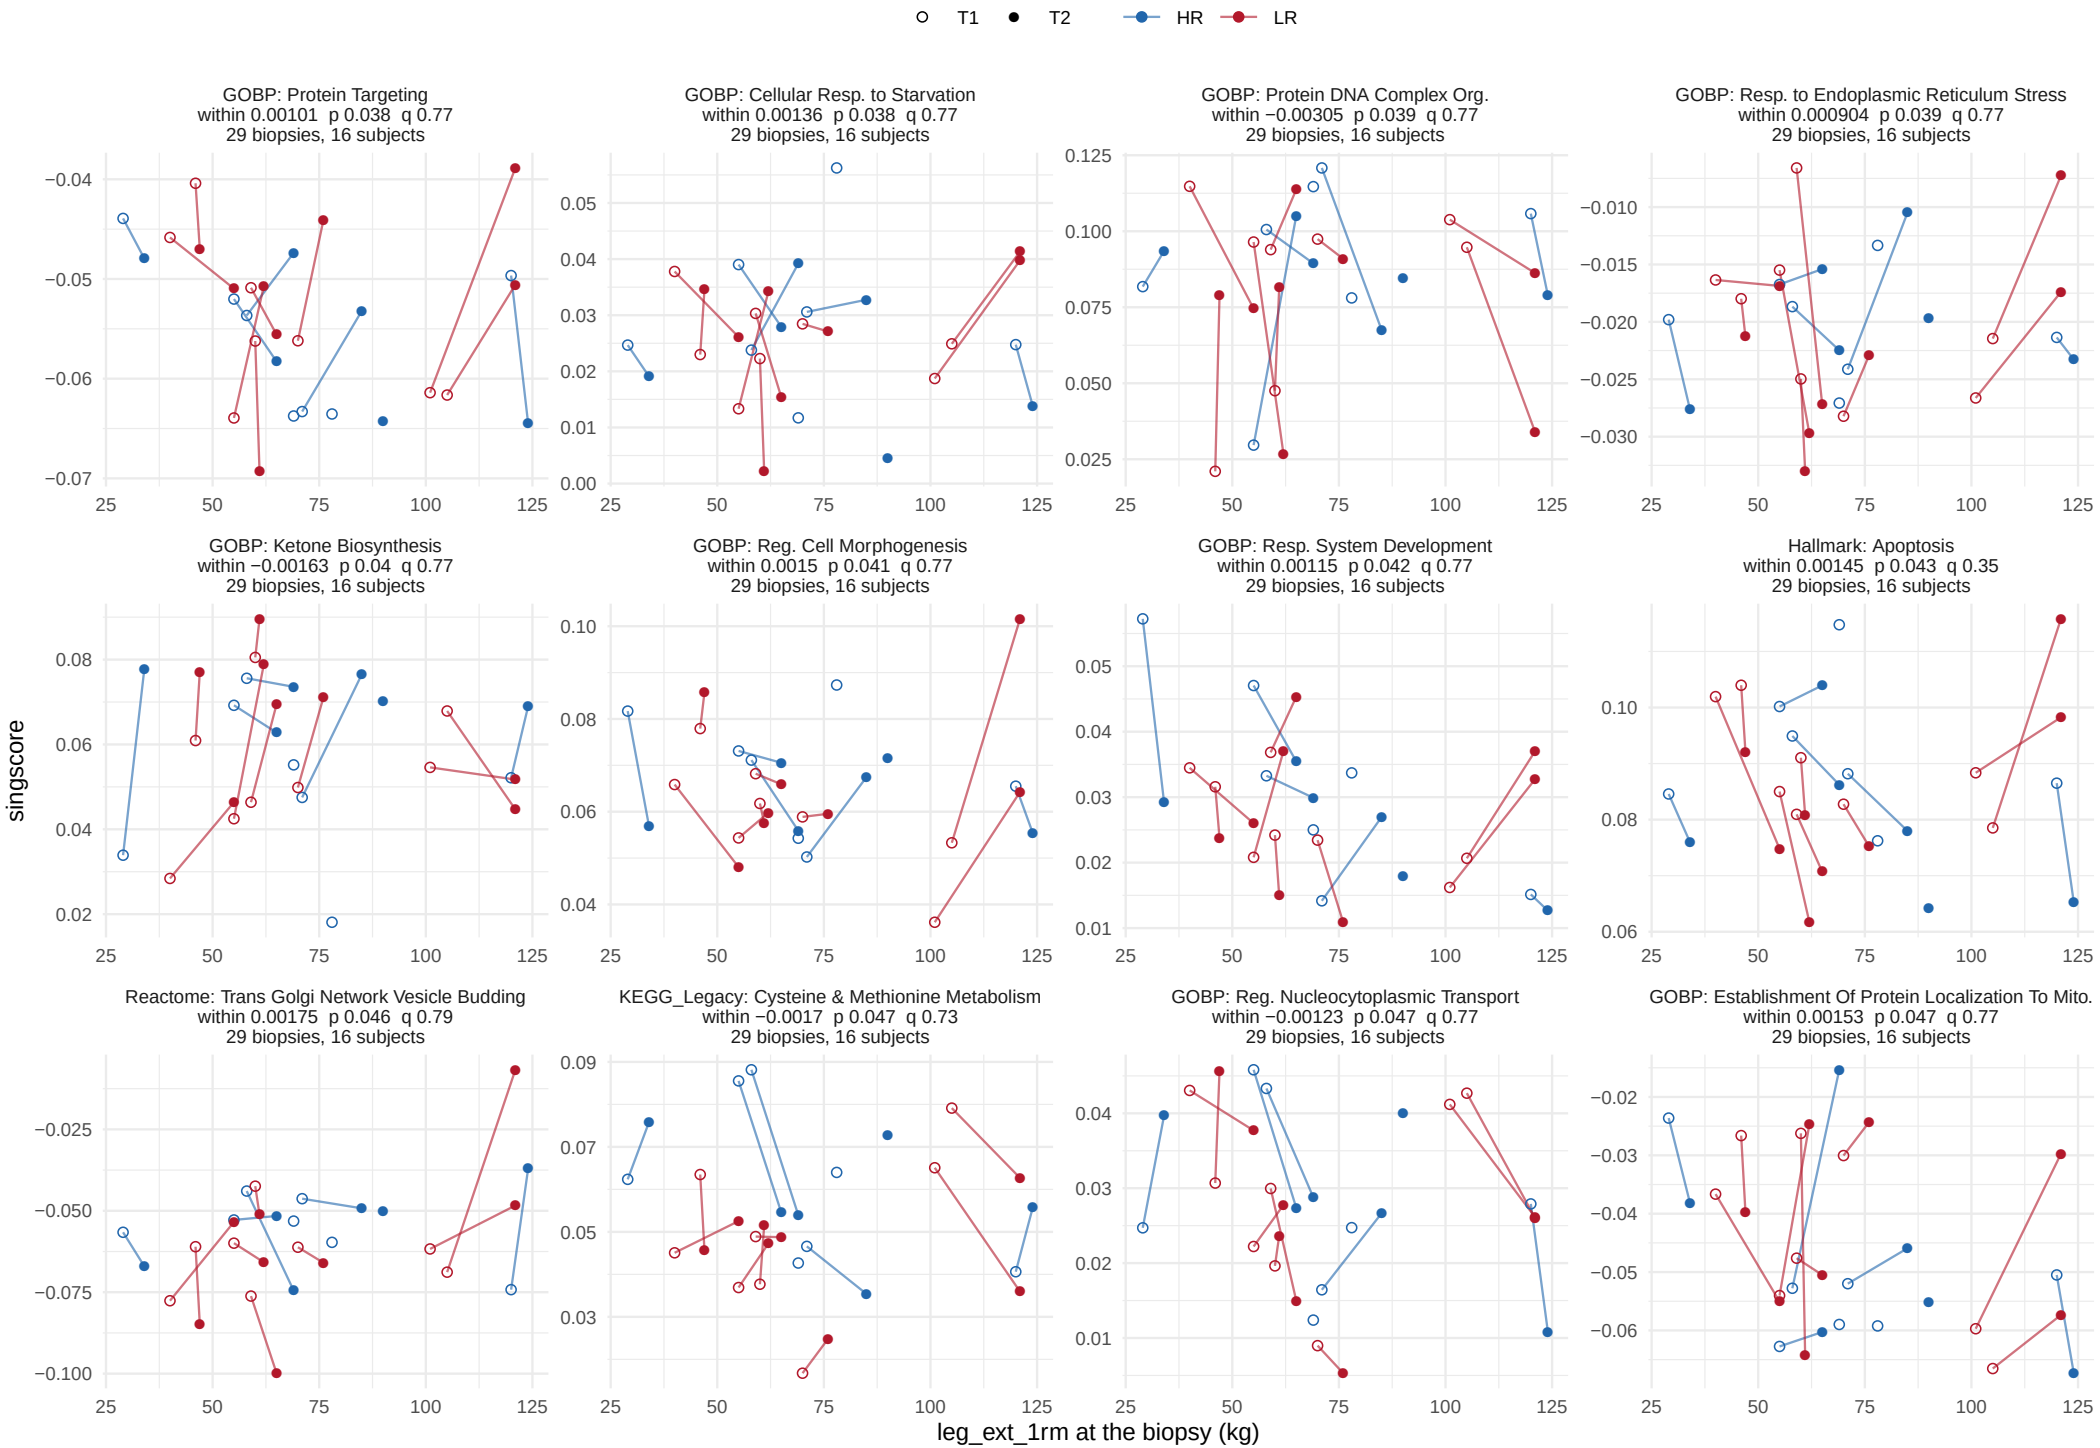

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/05_associate.xlsx, model.

leg_ext_1rm, within−person term


78 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 7 of 7.

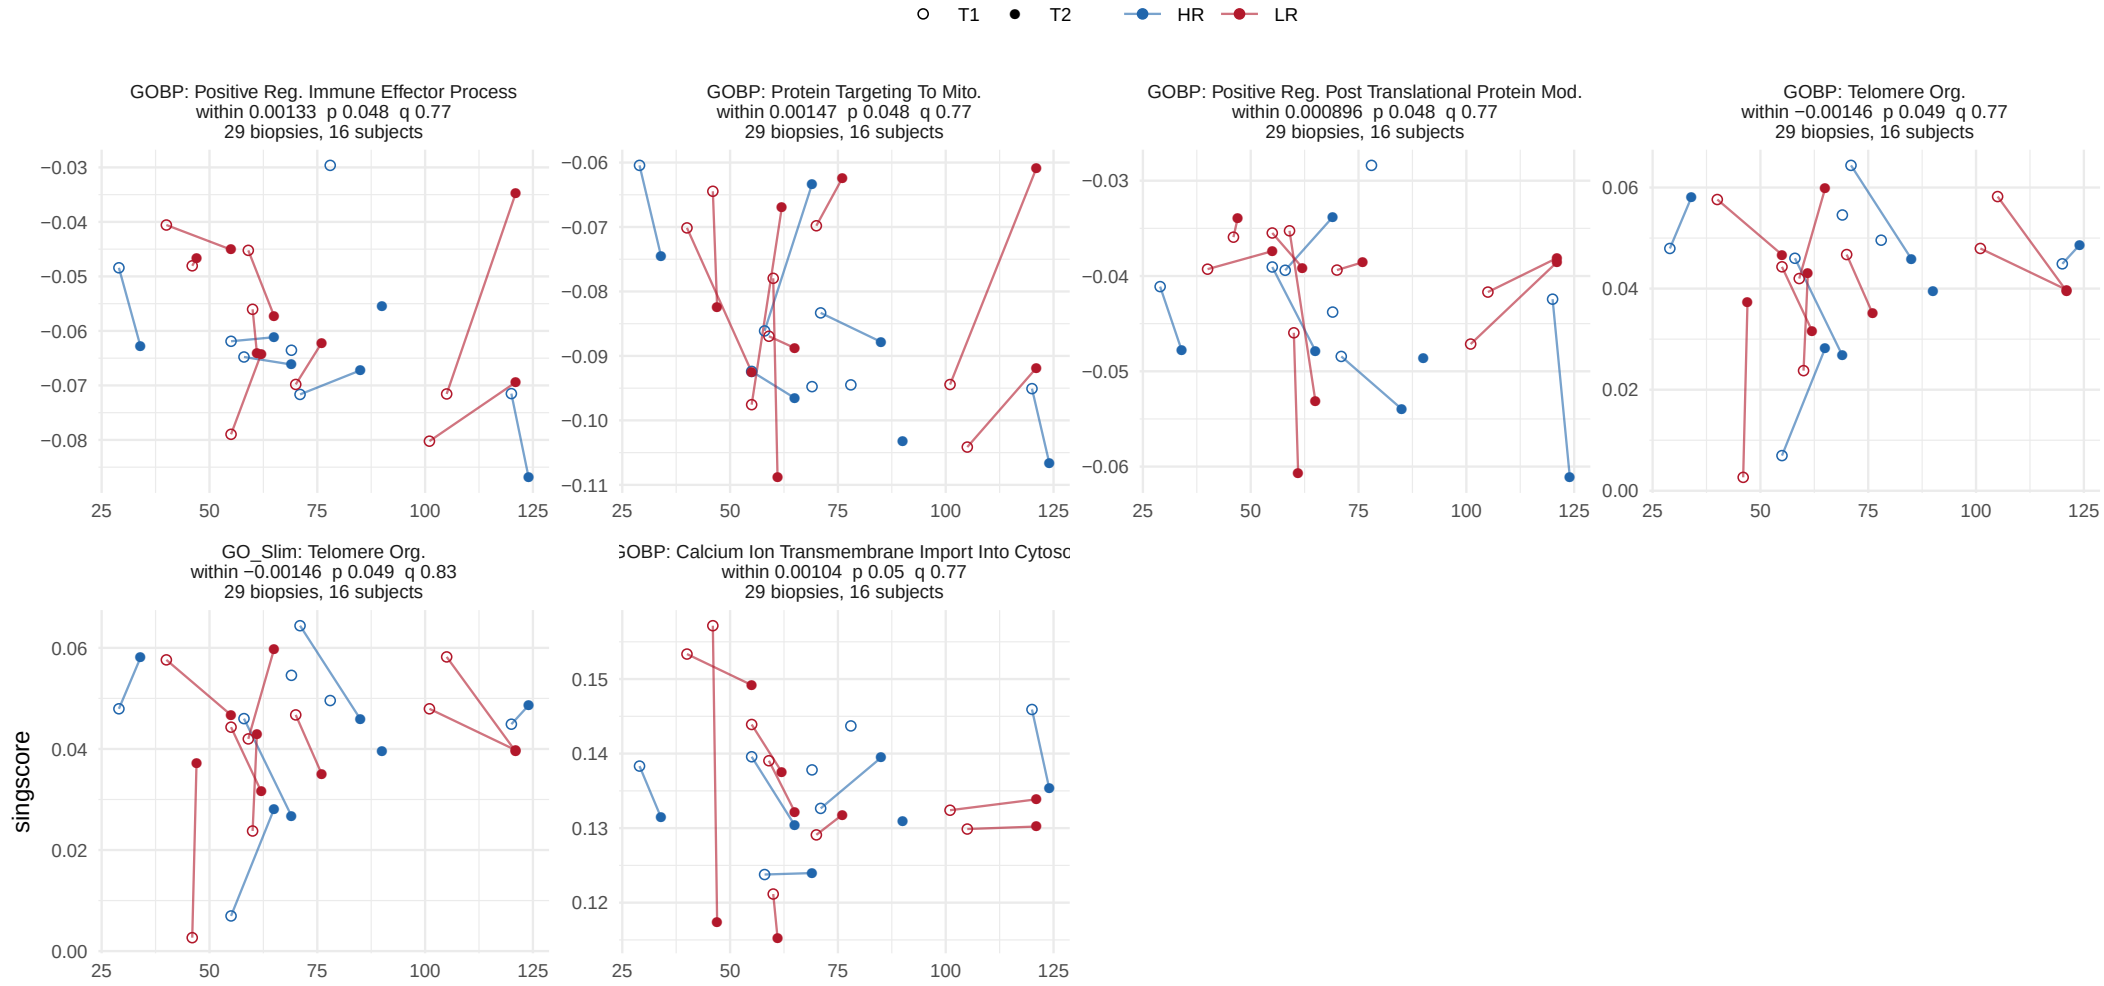

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/05_associate.xlsx, model.

leg_ext_1rm, between−person term


39 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 1 of 4.

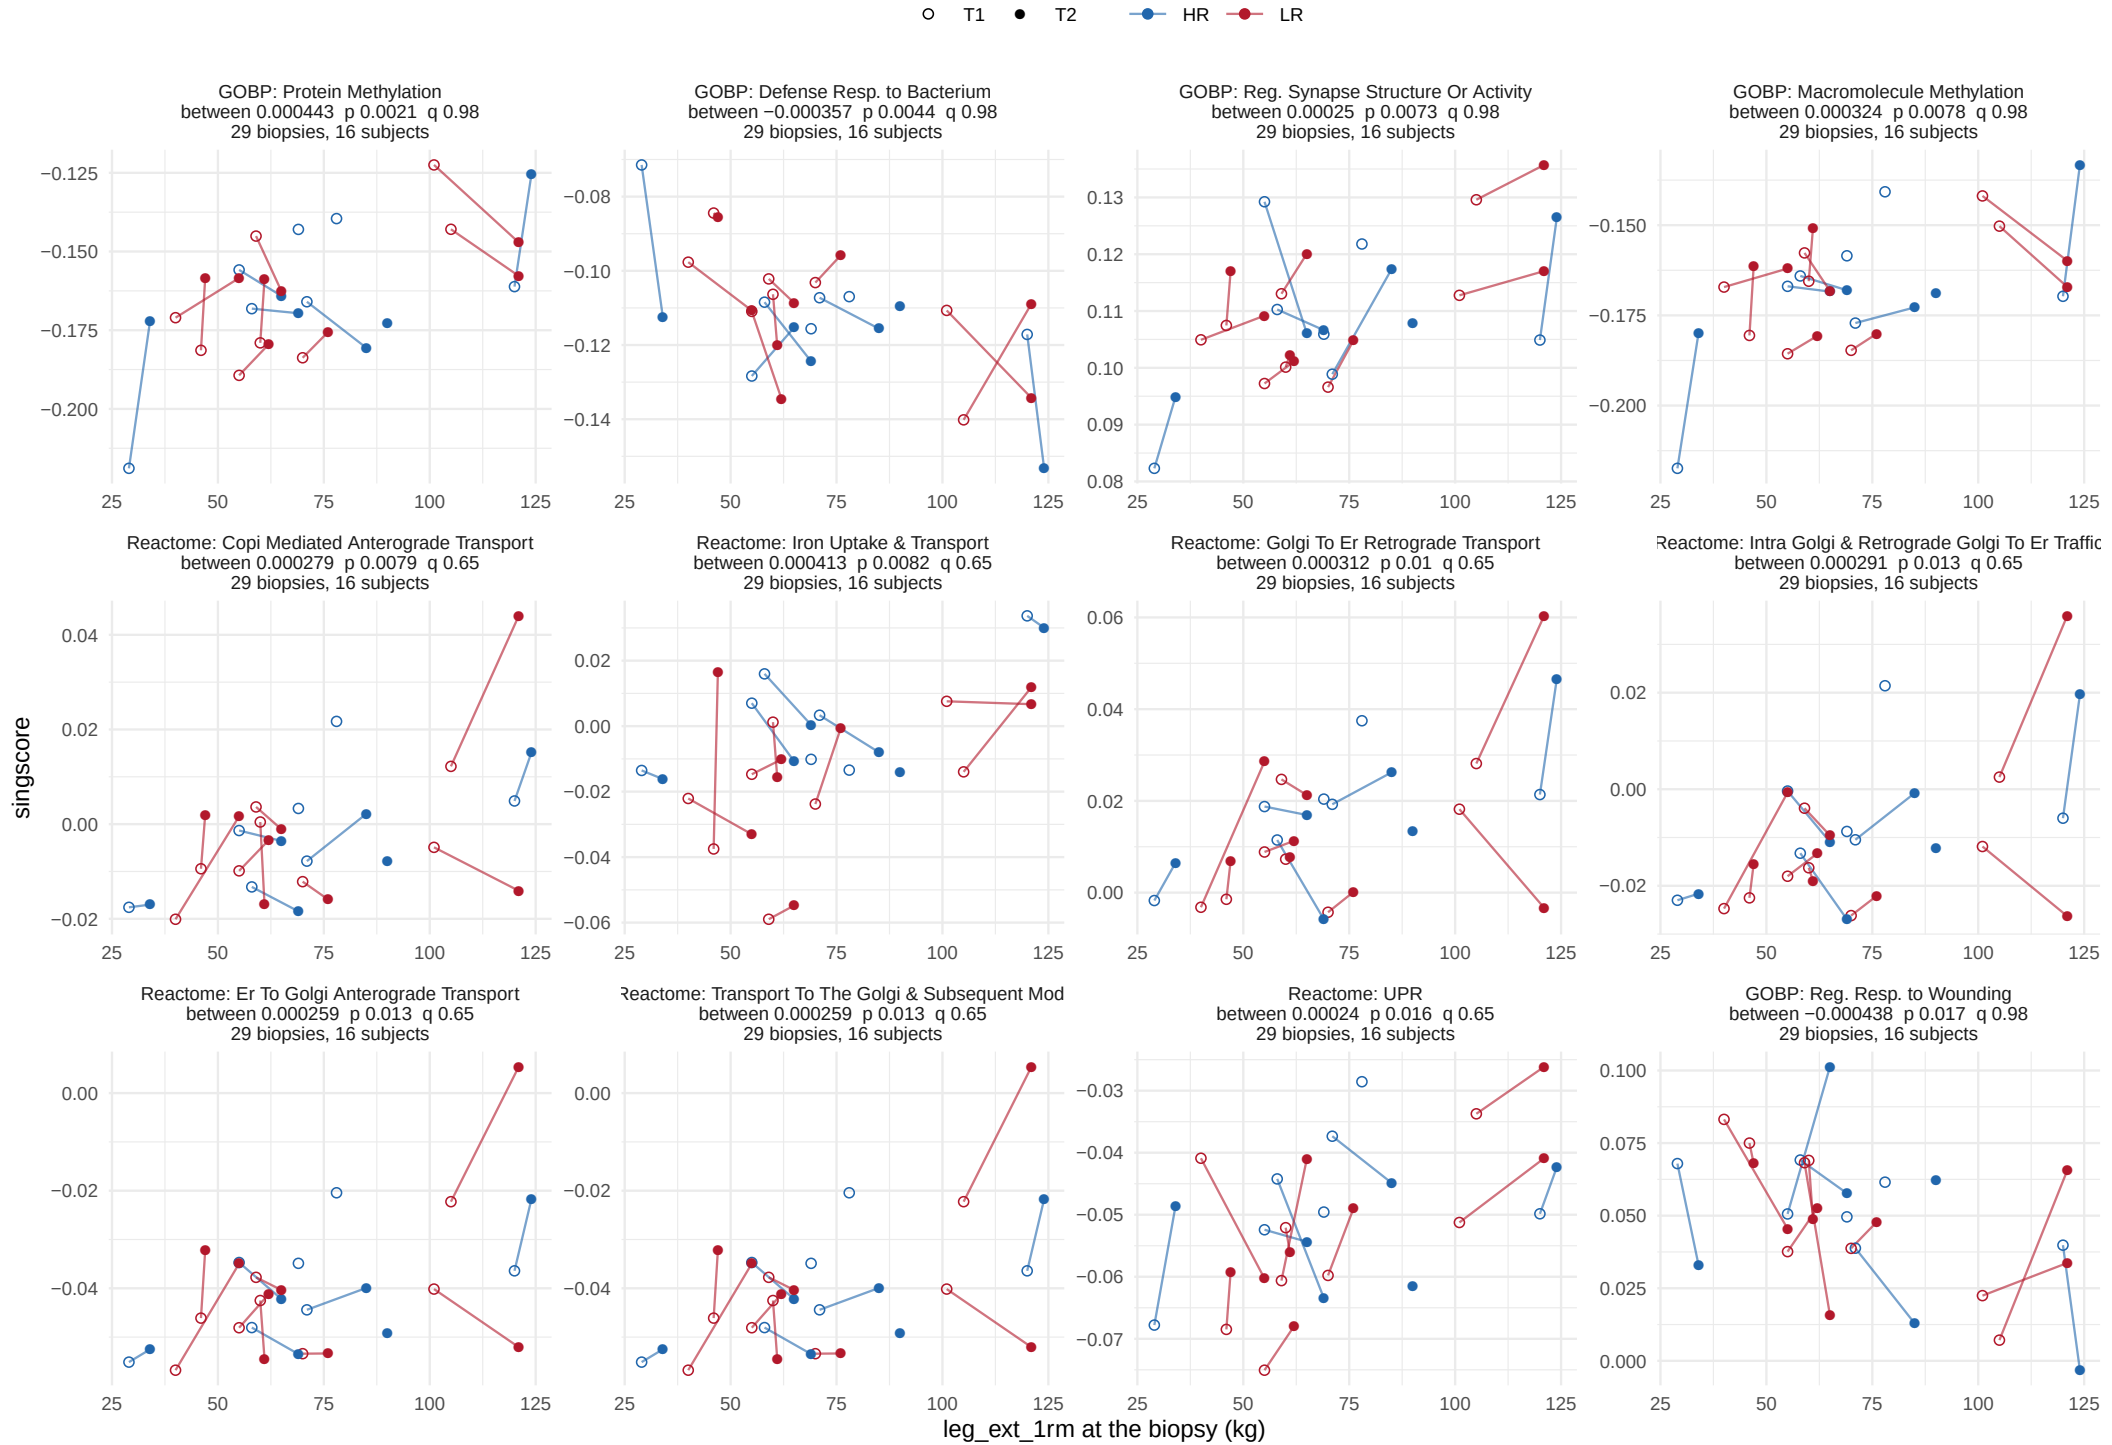

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/05_associate.xlsx, model.

leg_ext_1rm, between−person term


39 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 2 of 4.

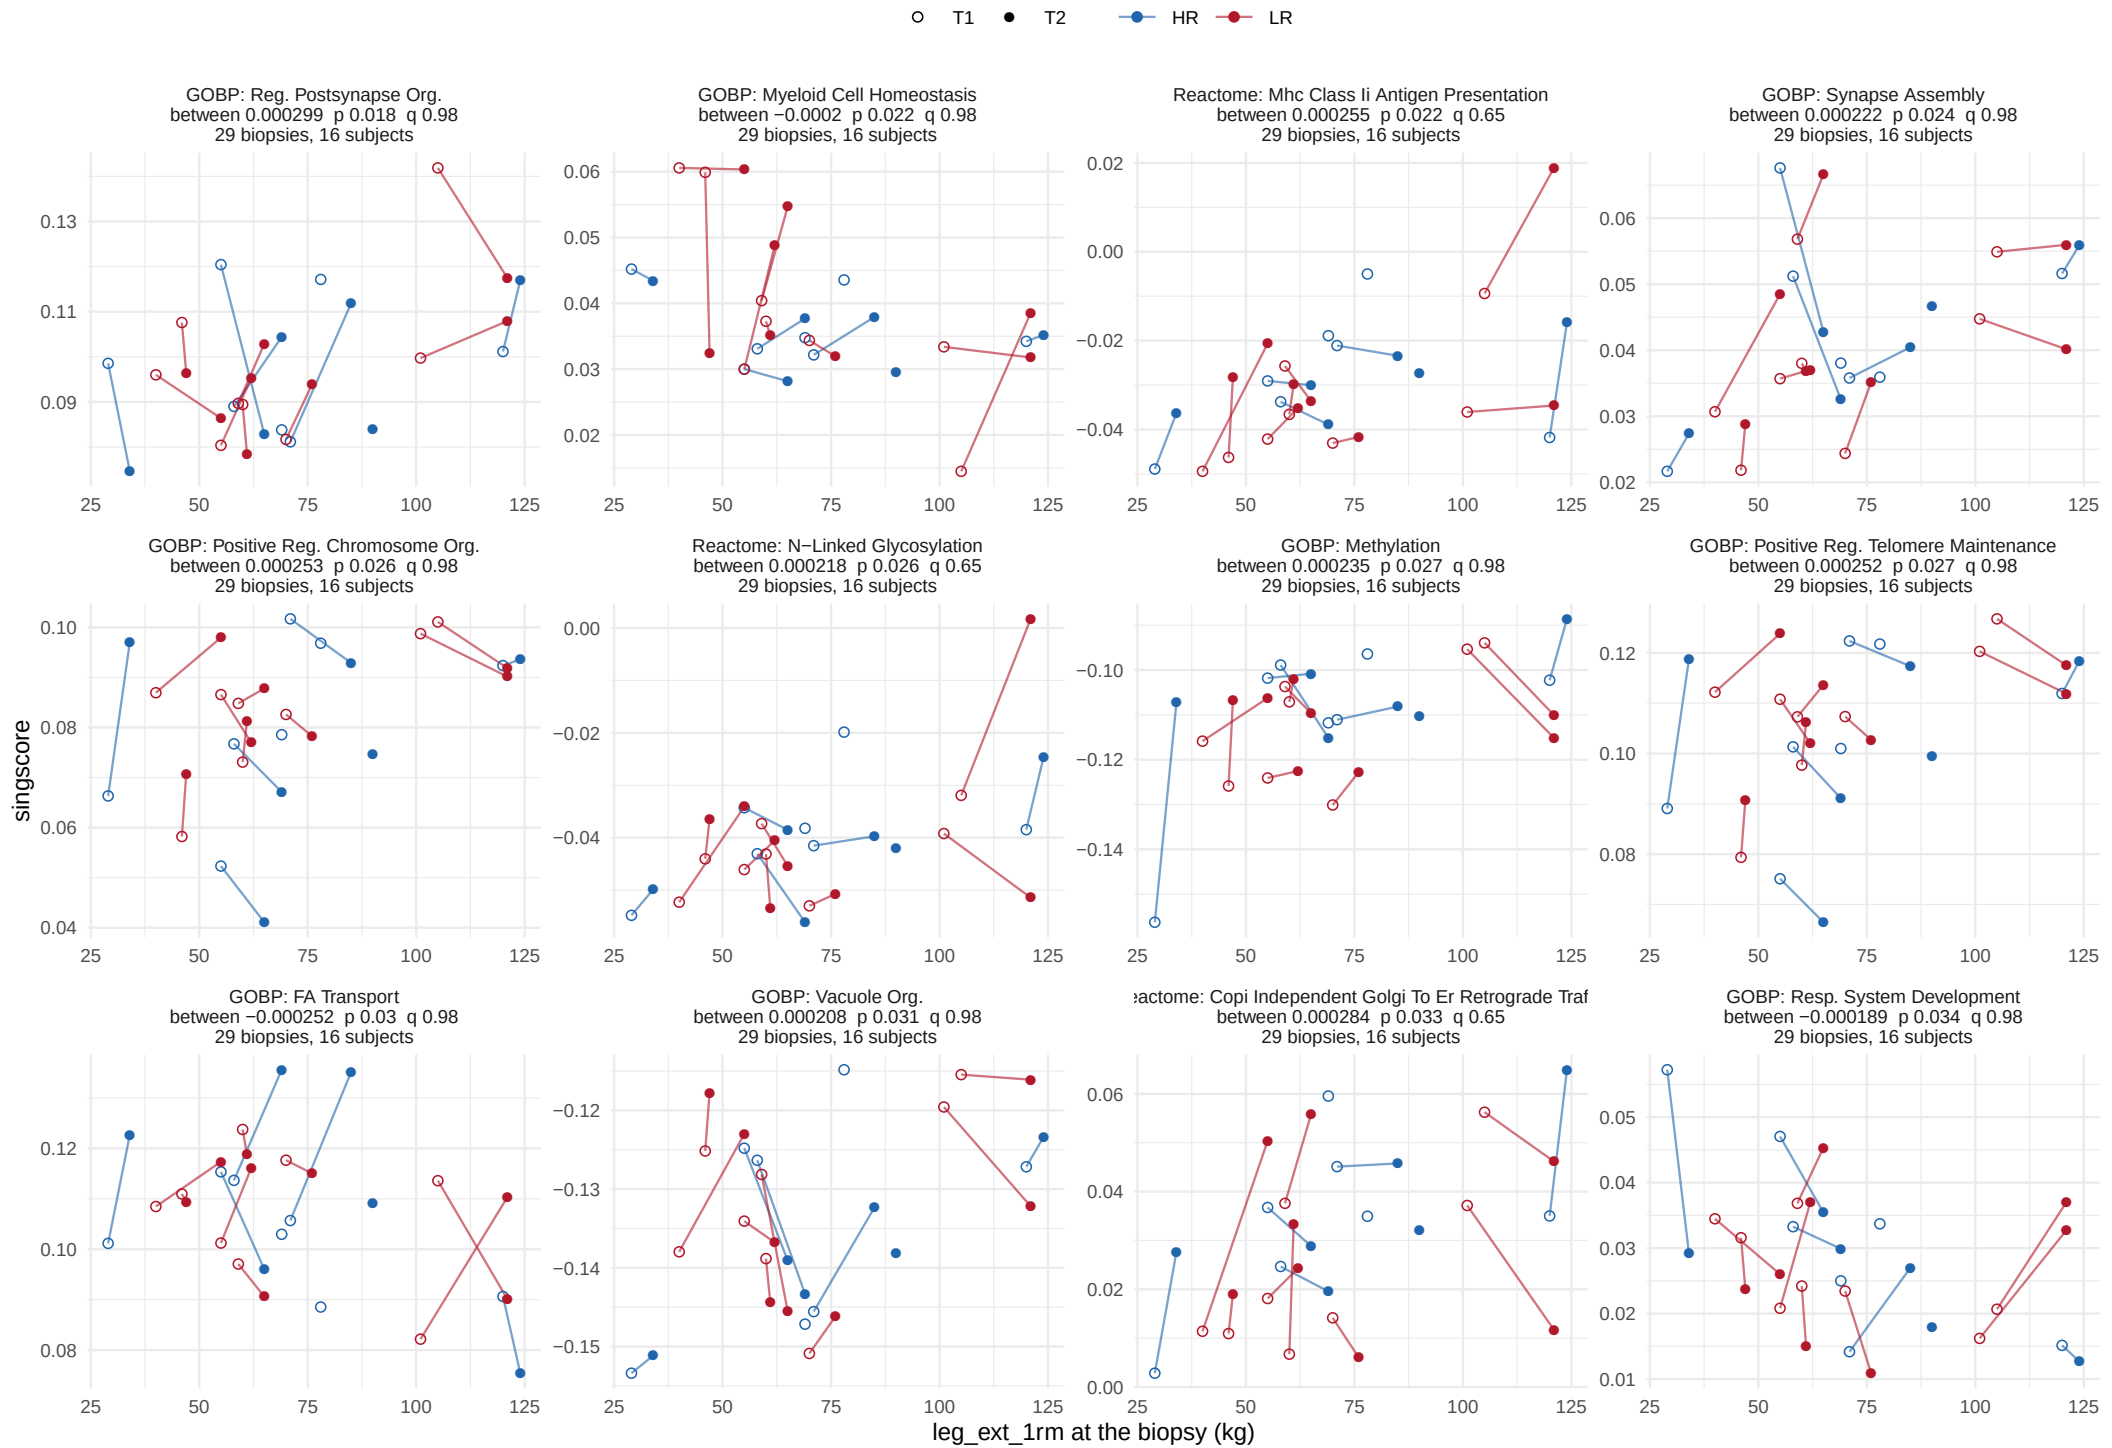

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/05_associate.xlsx, model.

leg_ext_1rm, between−person term


39 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 3 of 4.

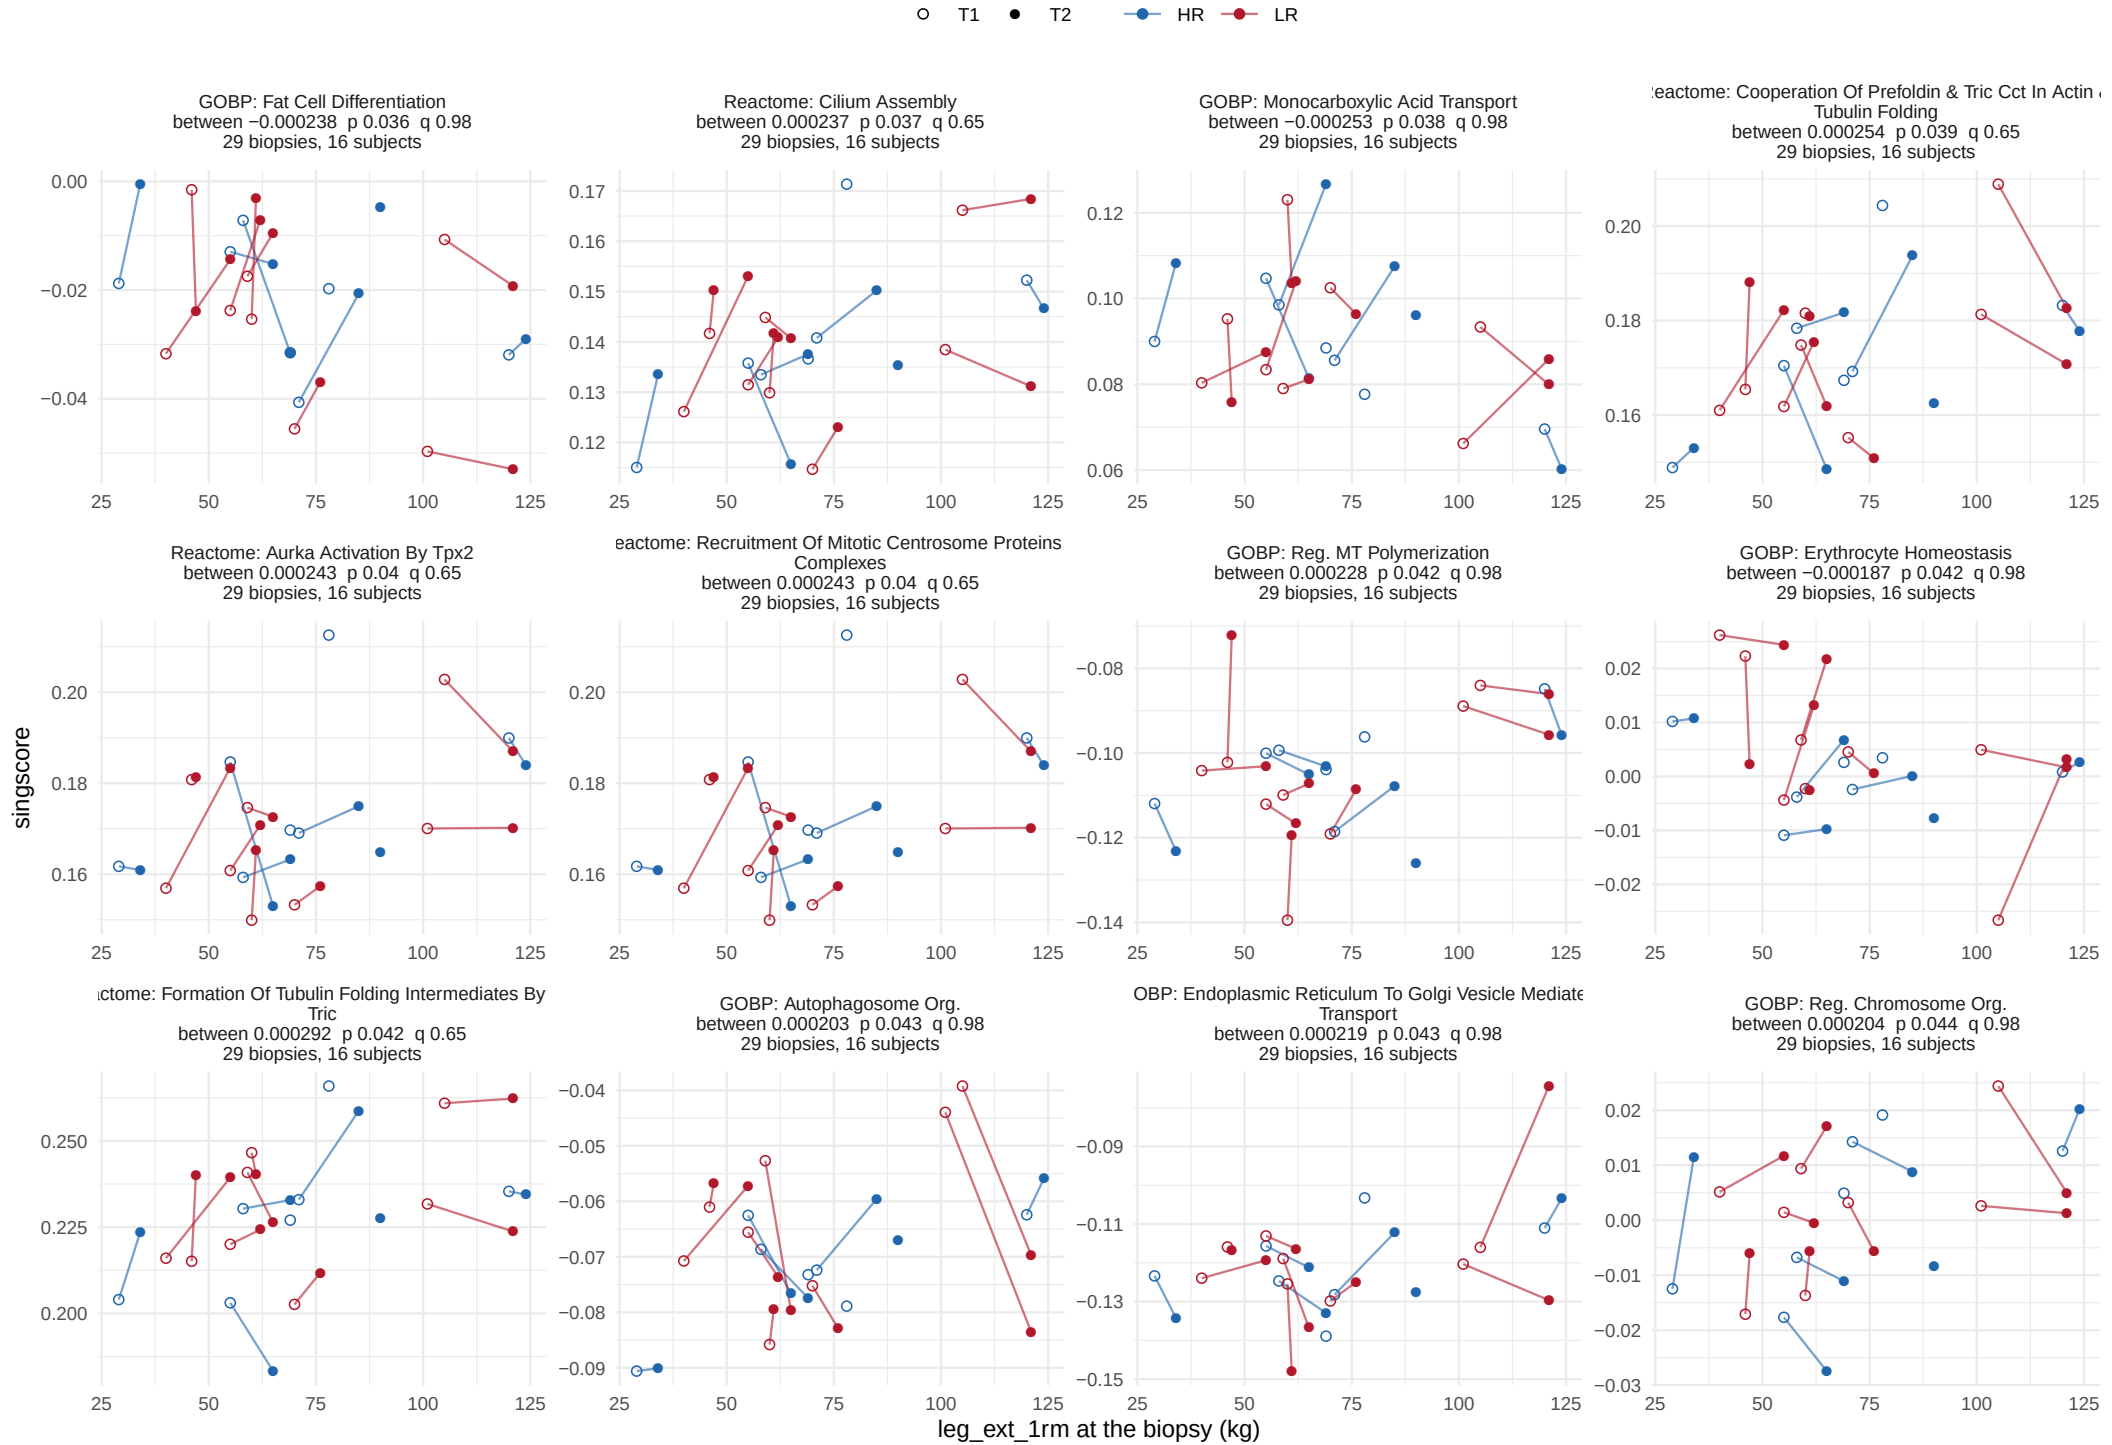

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/05_associate.xlsx, model.

leg_ext_1rm, between−person term


39 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 4 of 4.

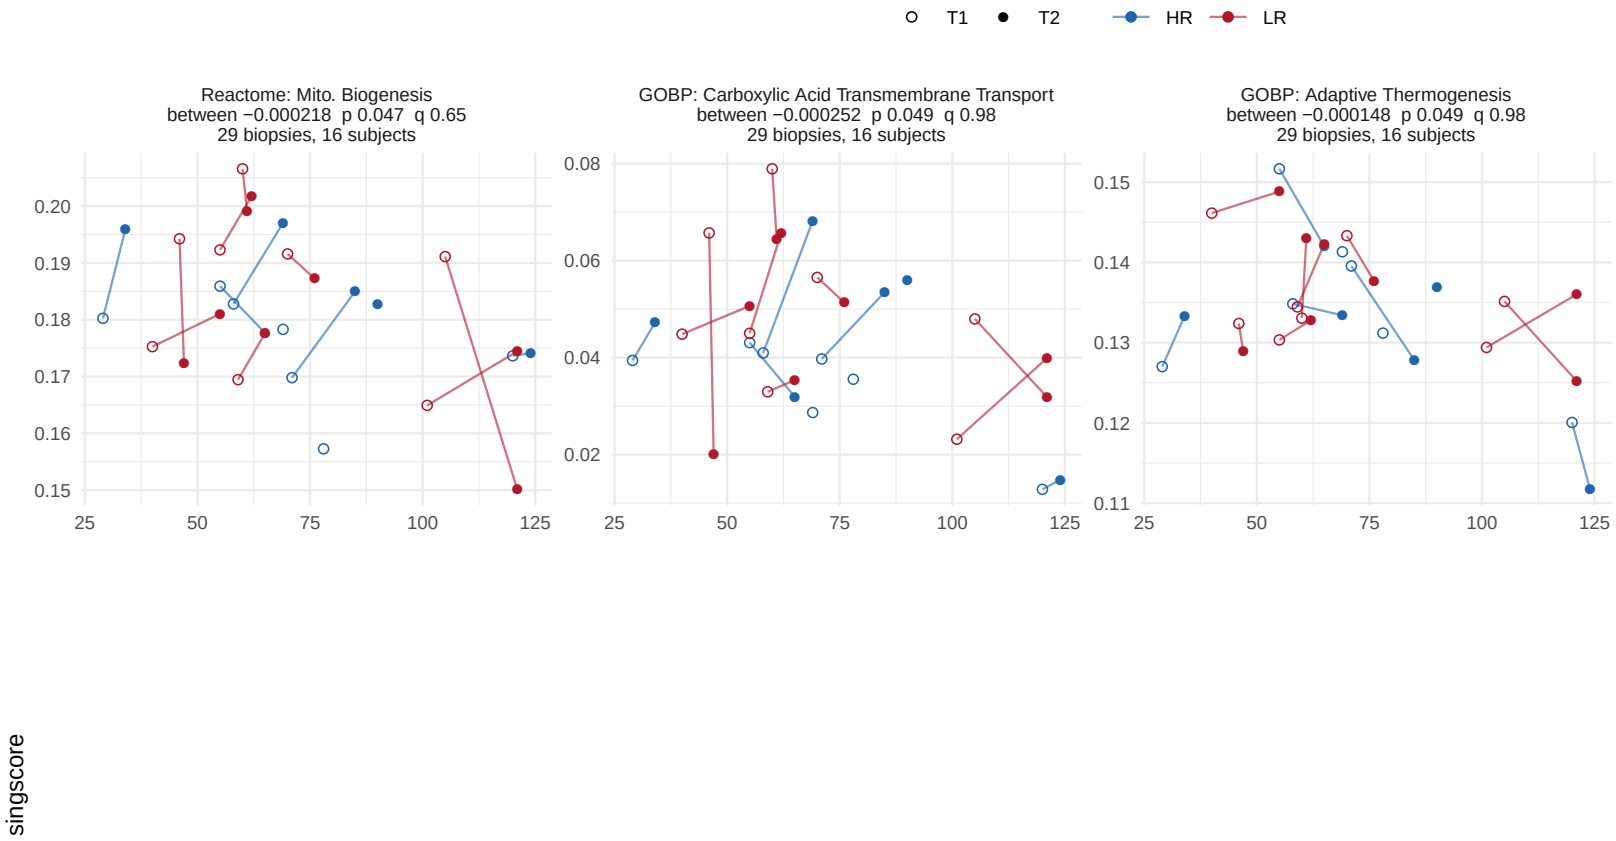

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/05_associate.xlsx, model.

Change score, training window


415 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 1 of 35.

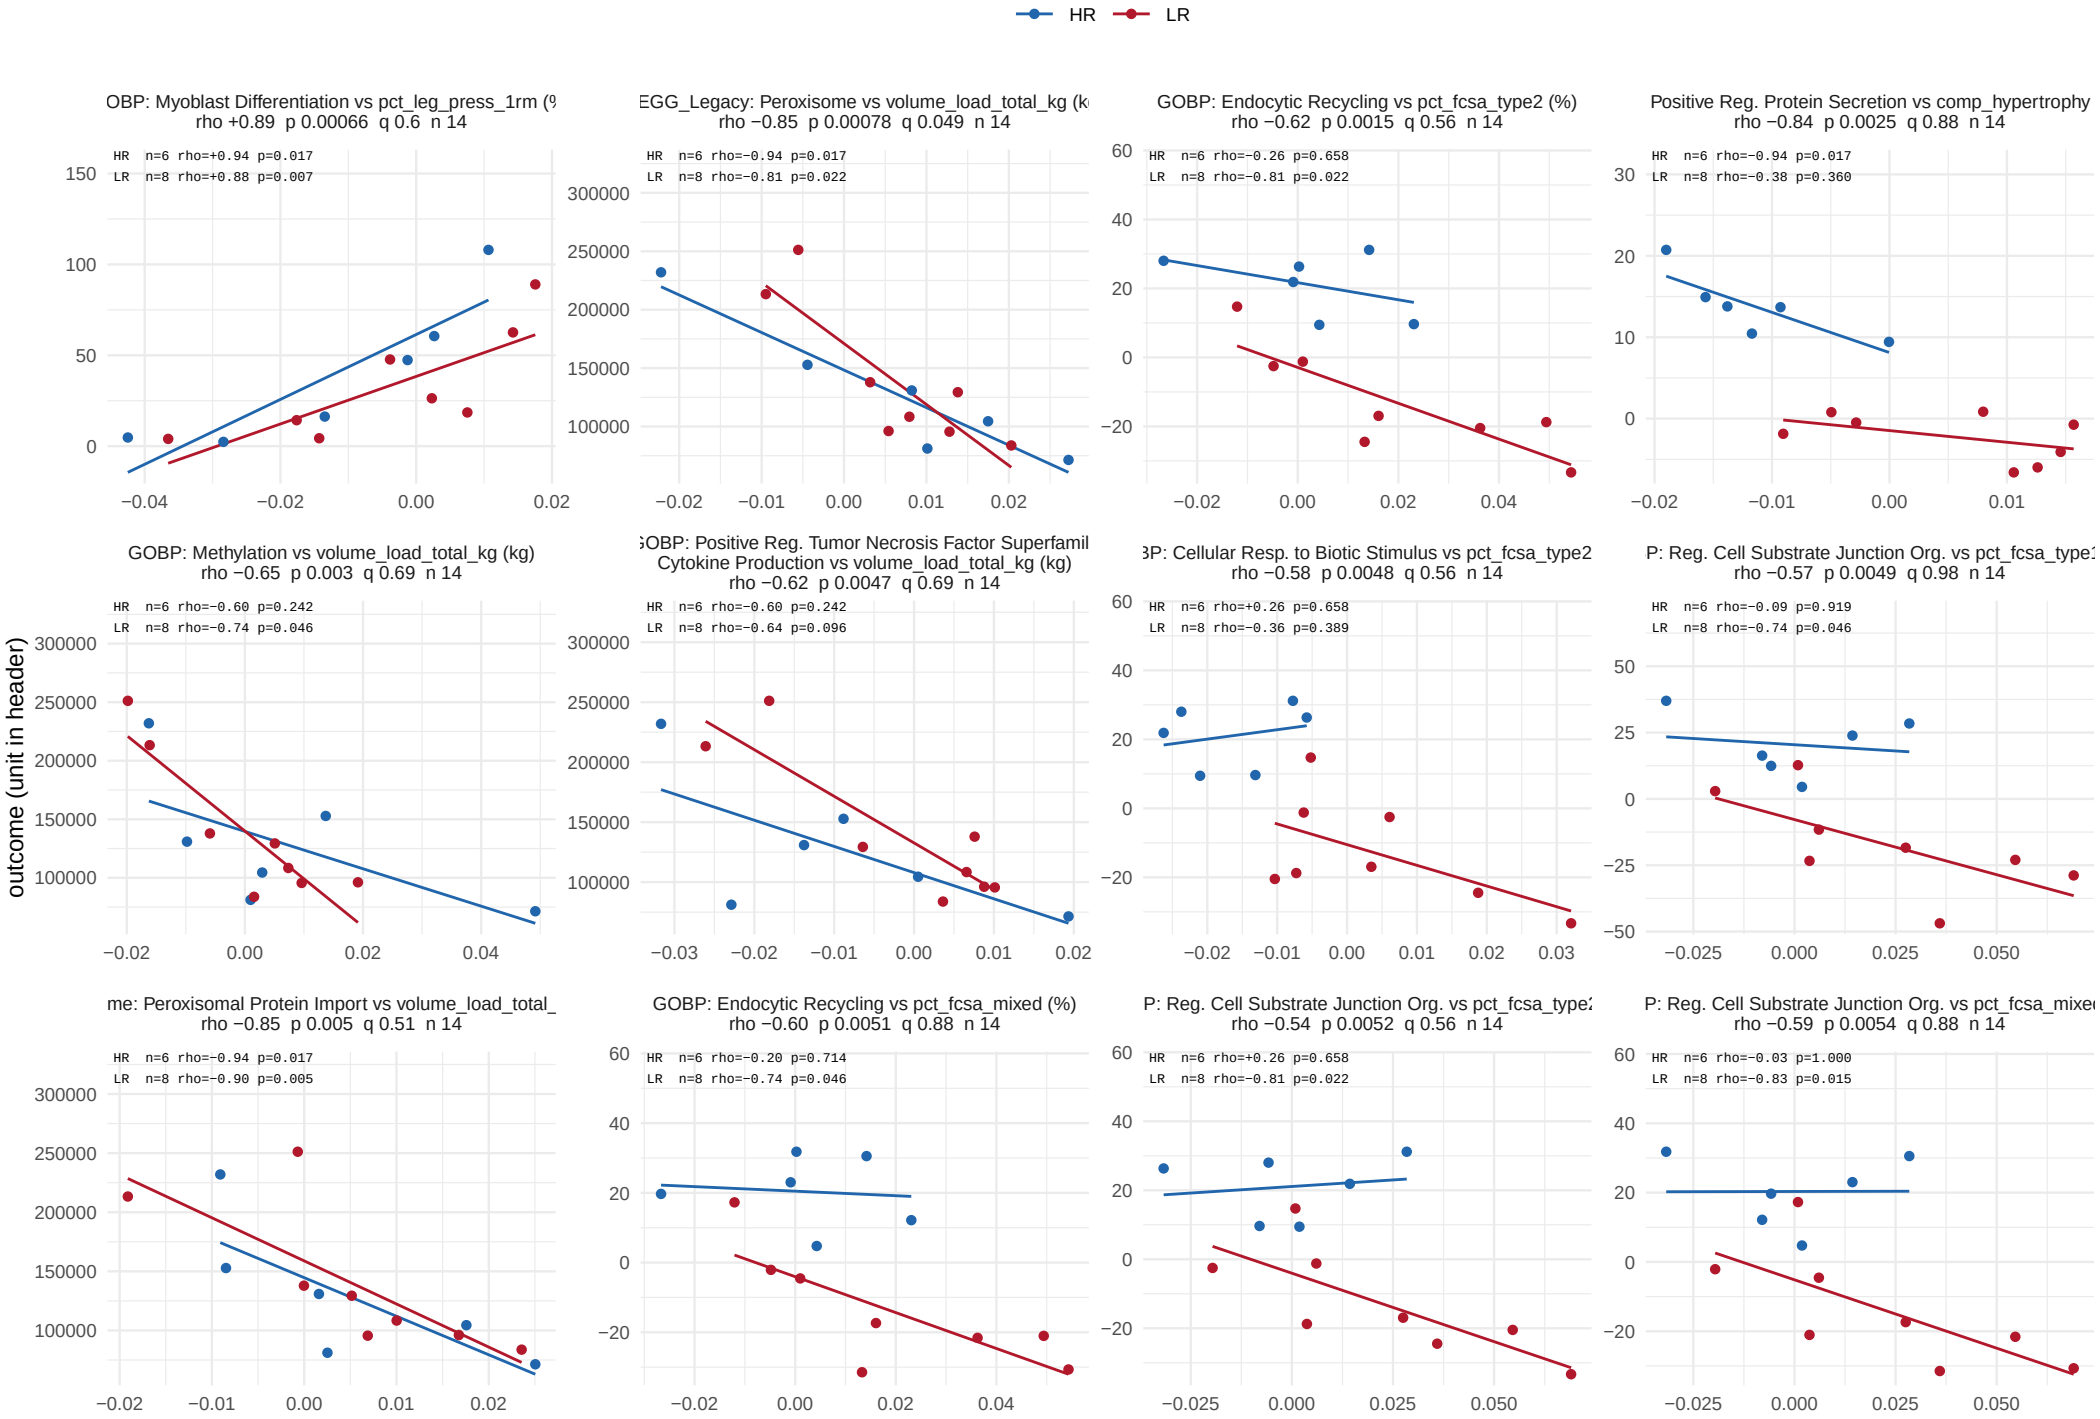

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


415 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 2 of 35.

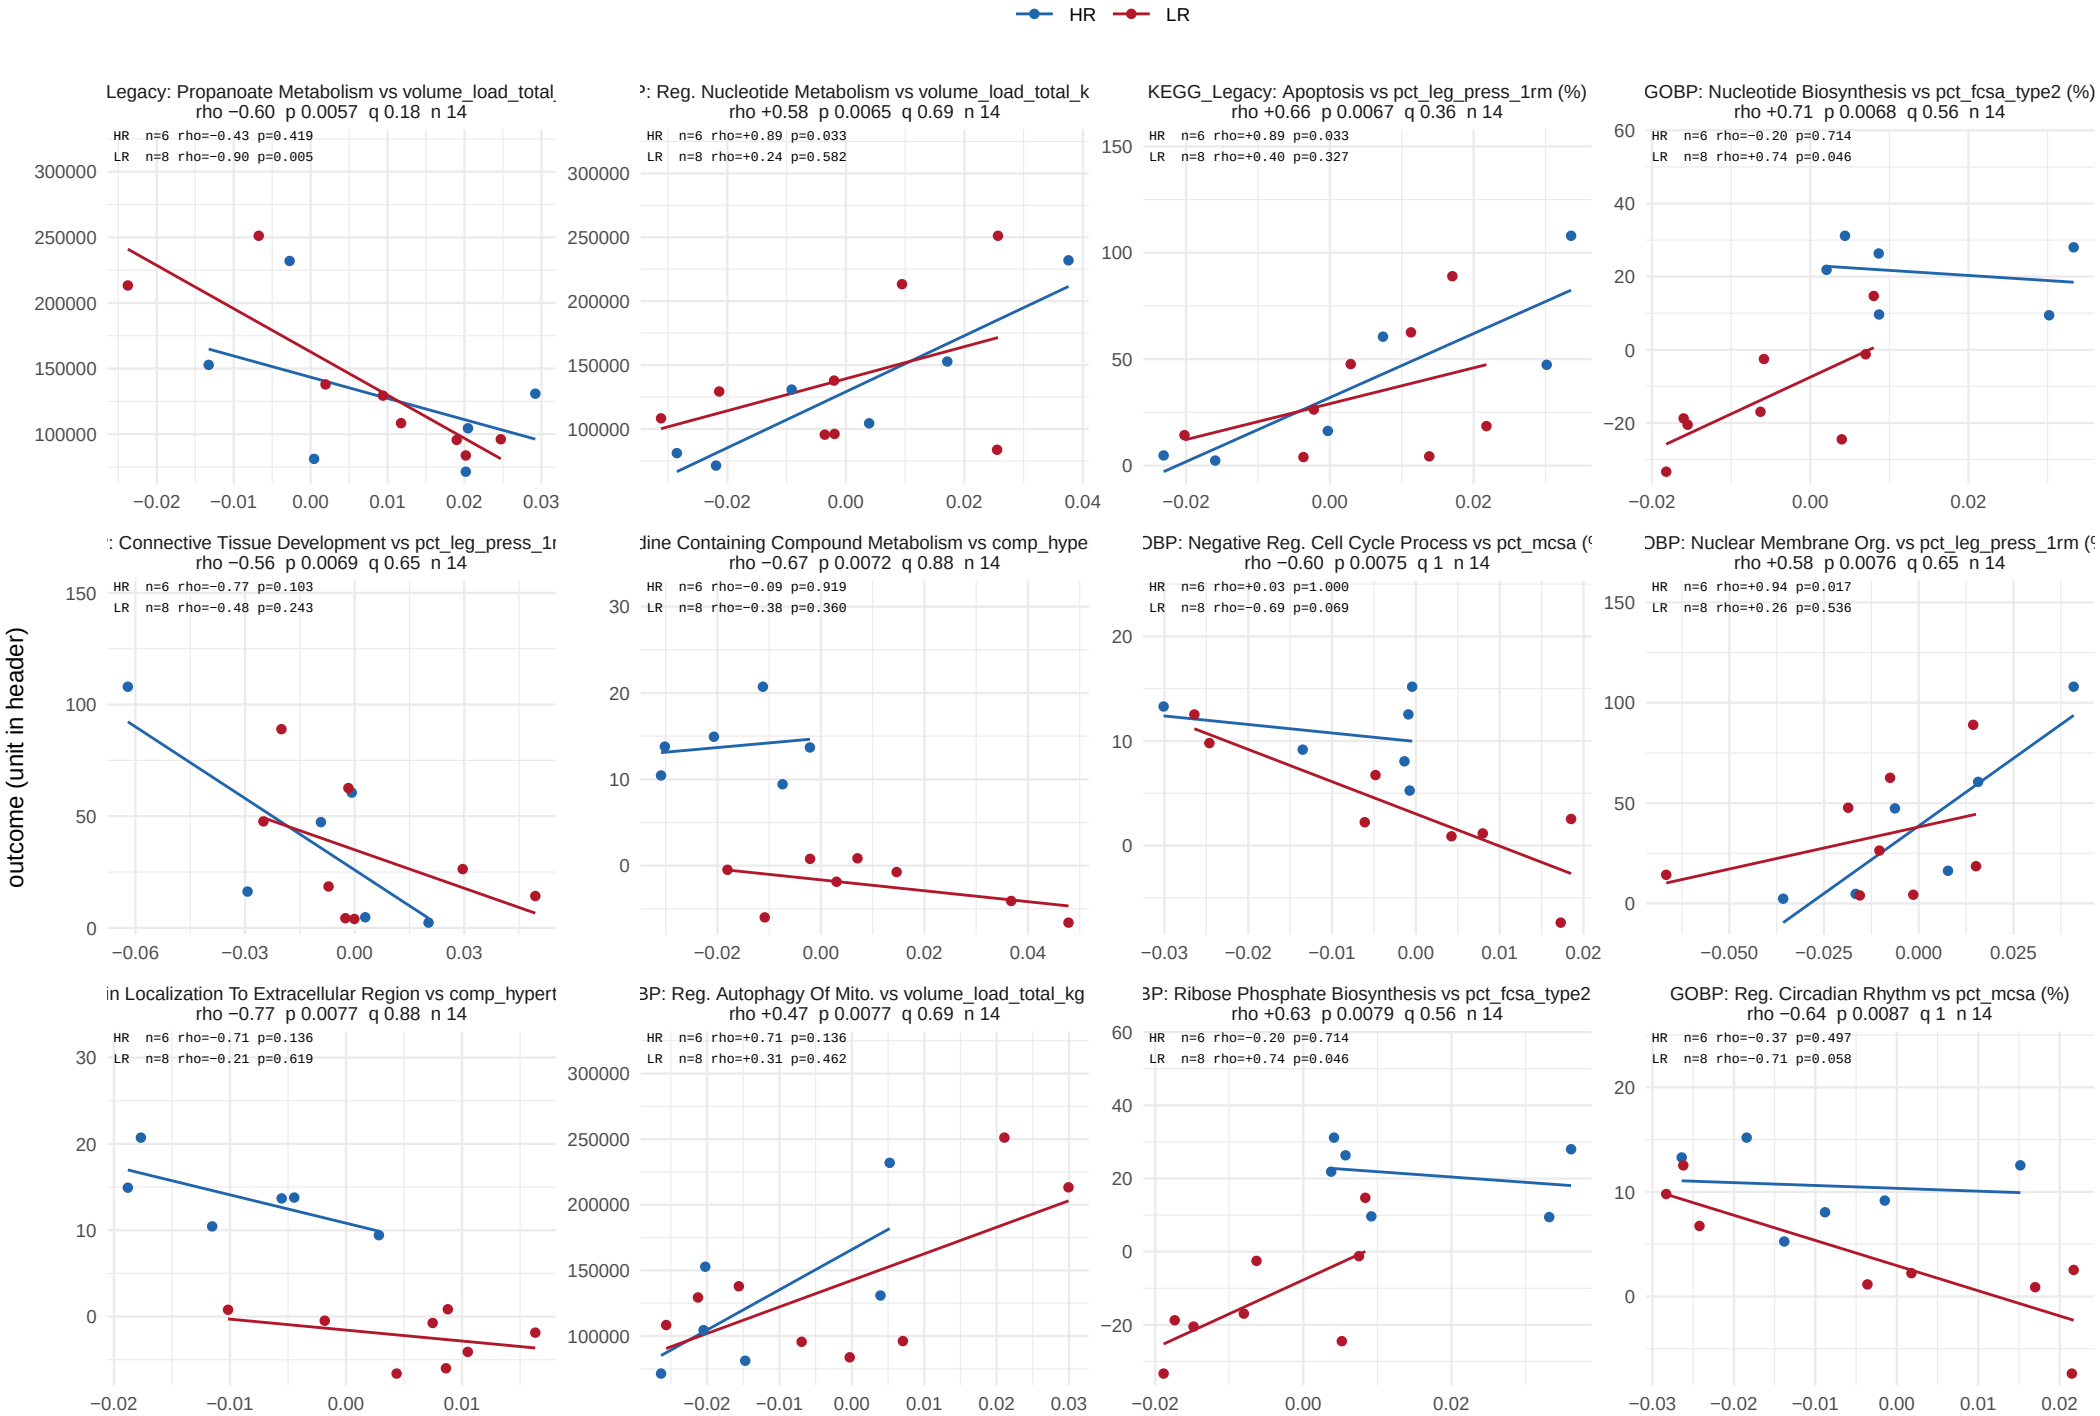

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


415 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 3 of 35.

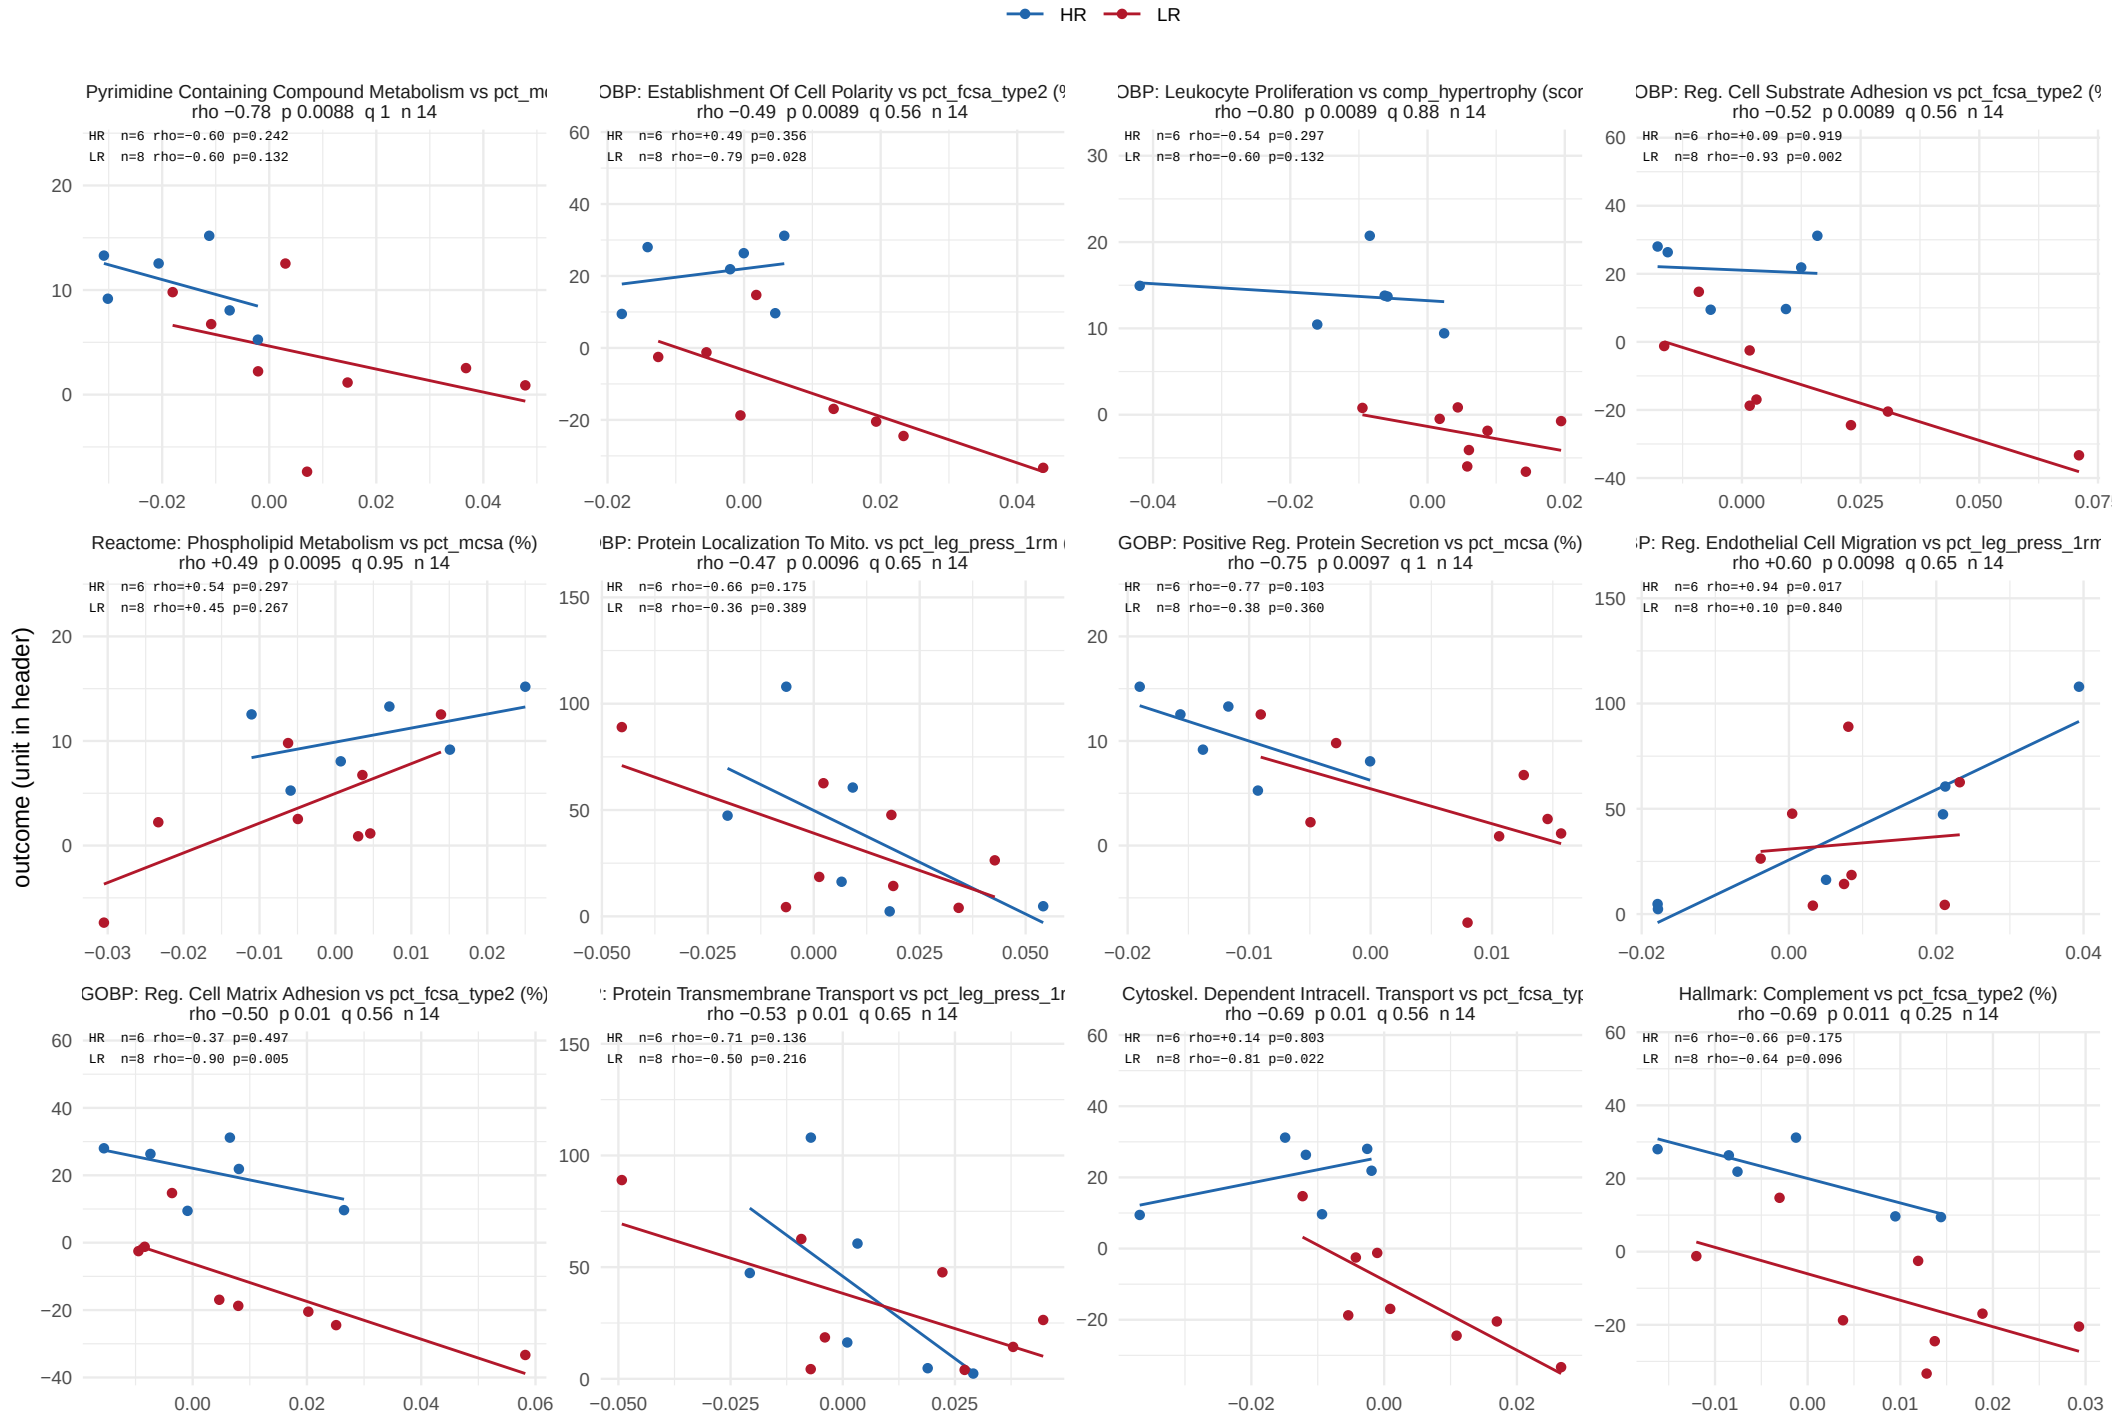

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


415 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 4 of 35.

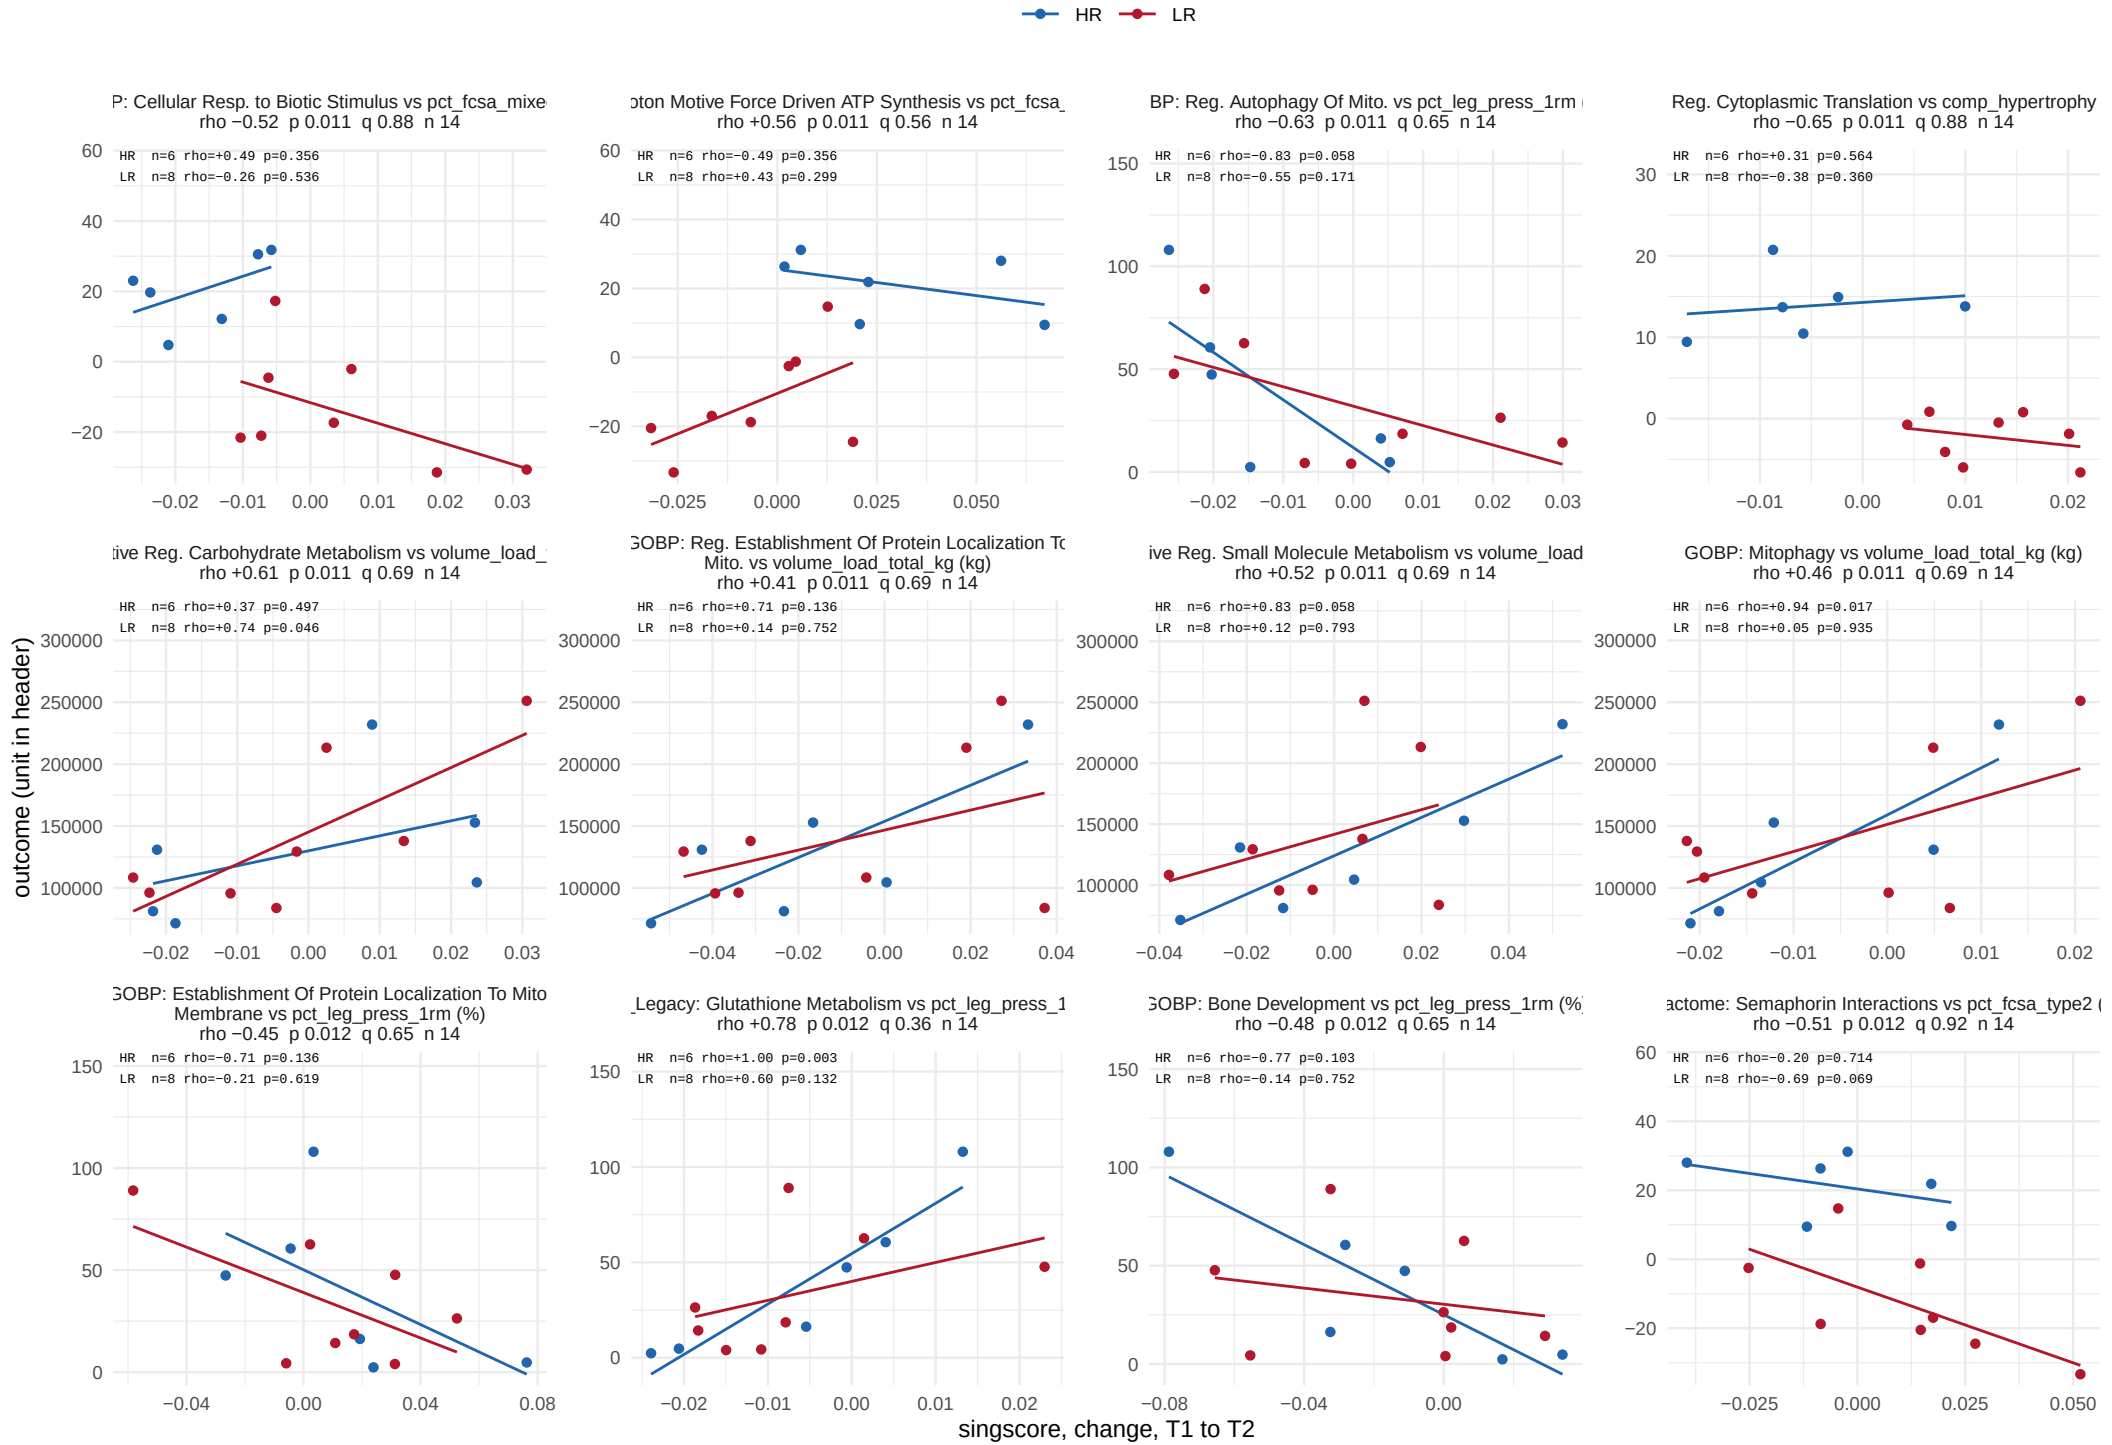

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


415 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 5 of 35.

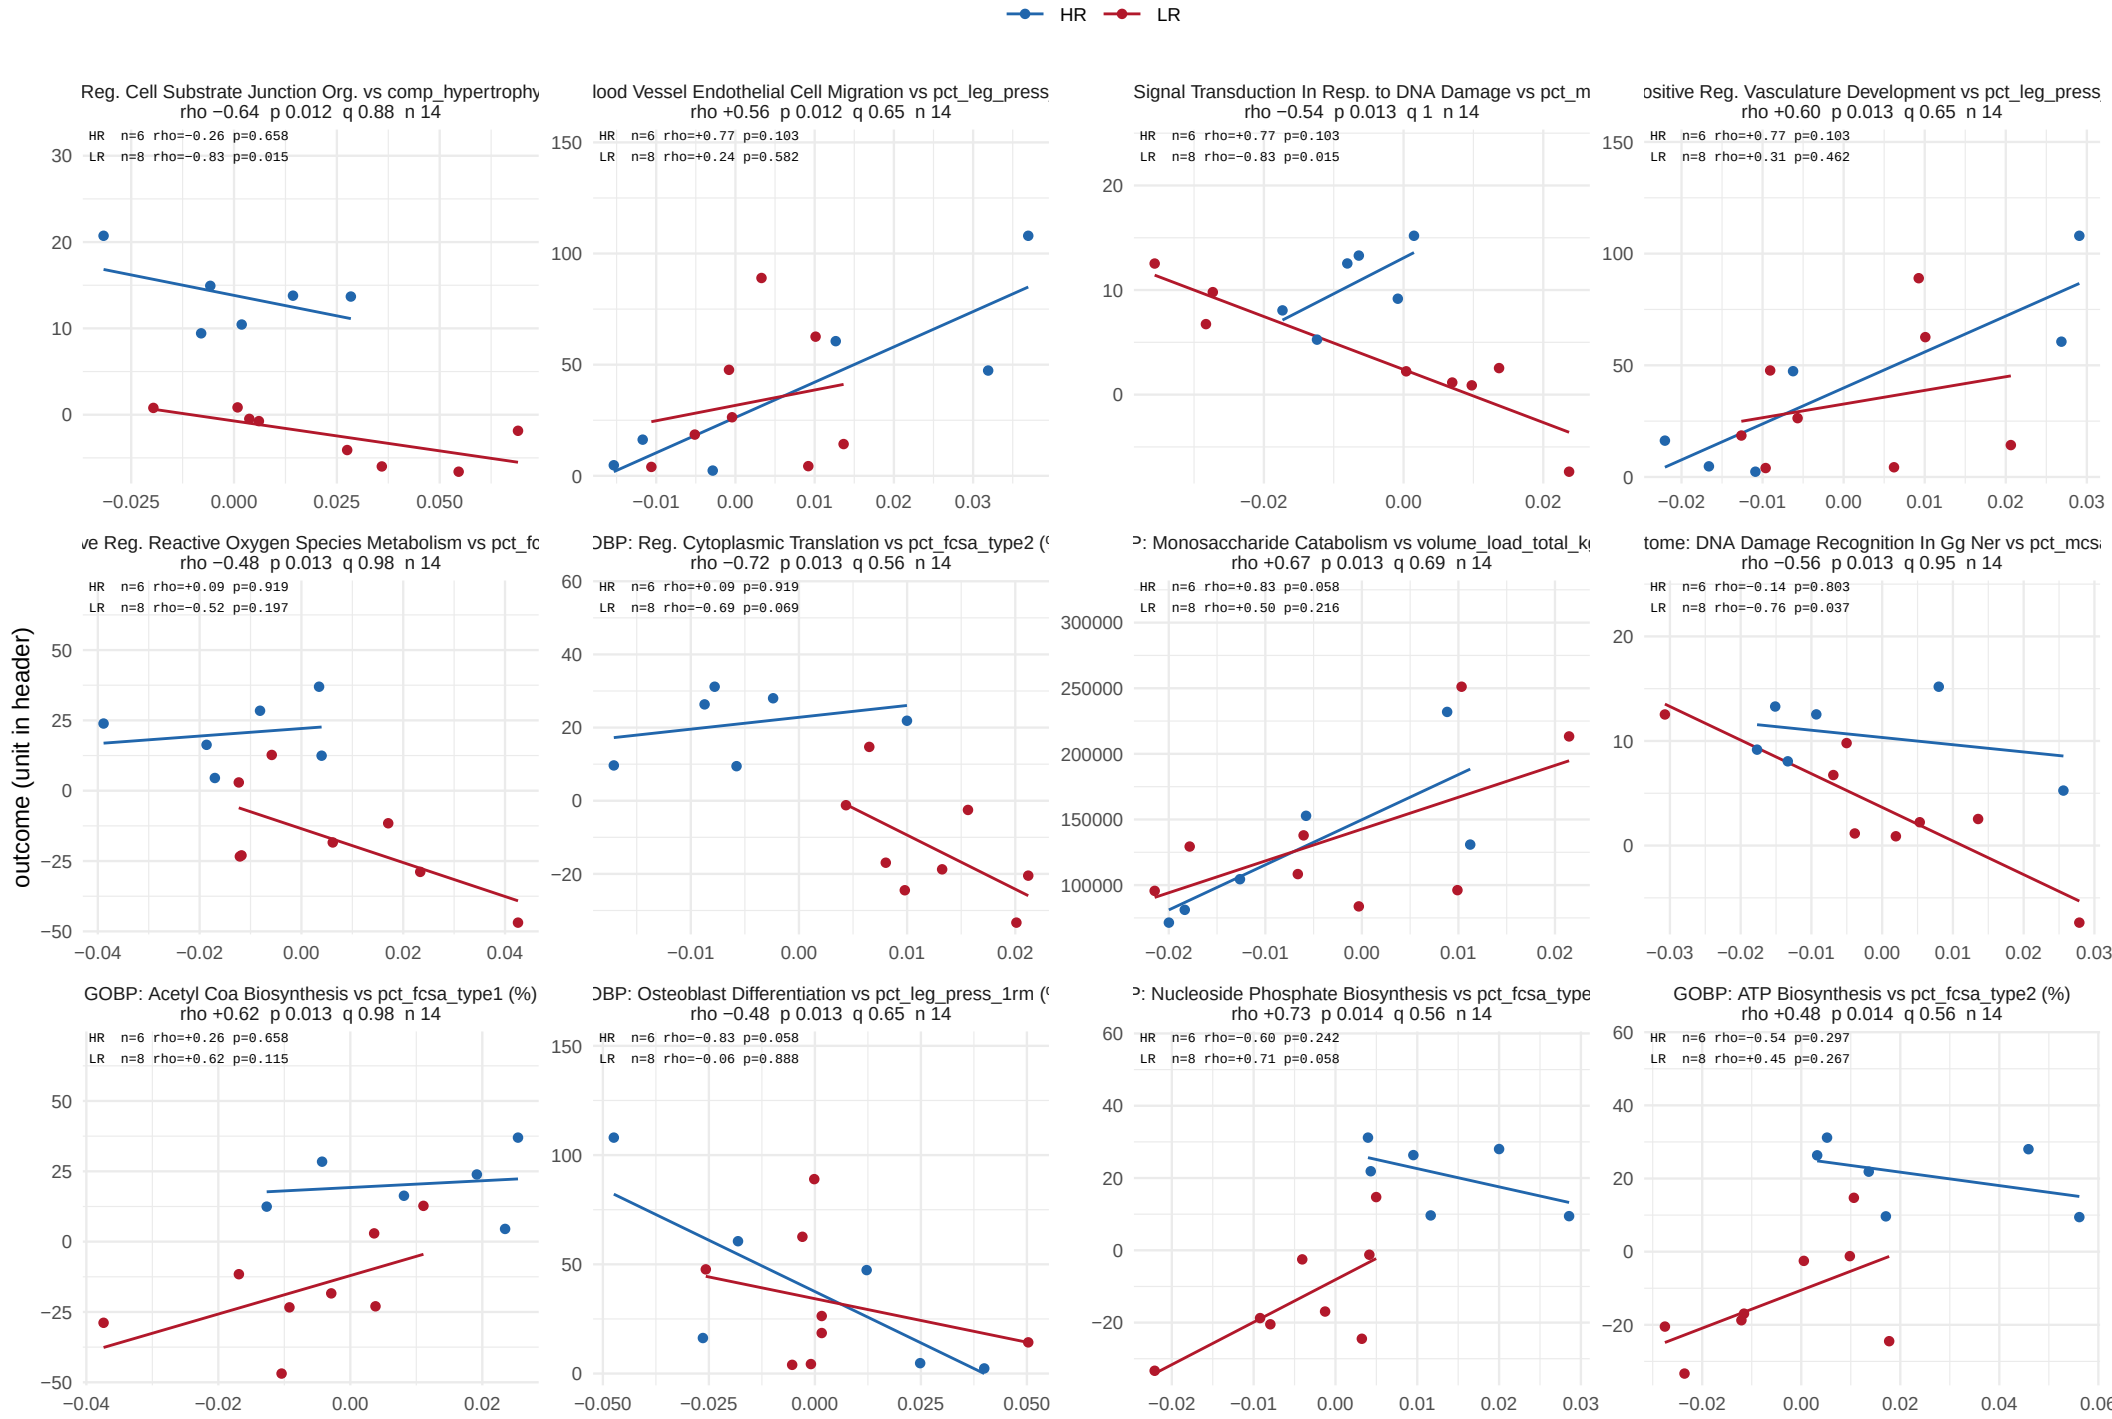

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


415 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 6 of 35.

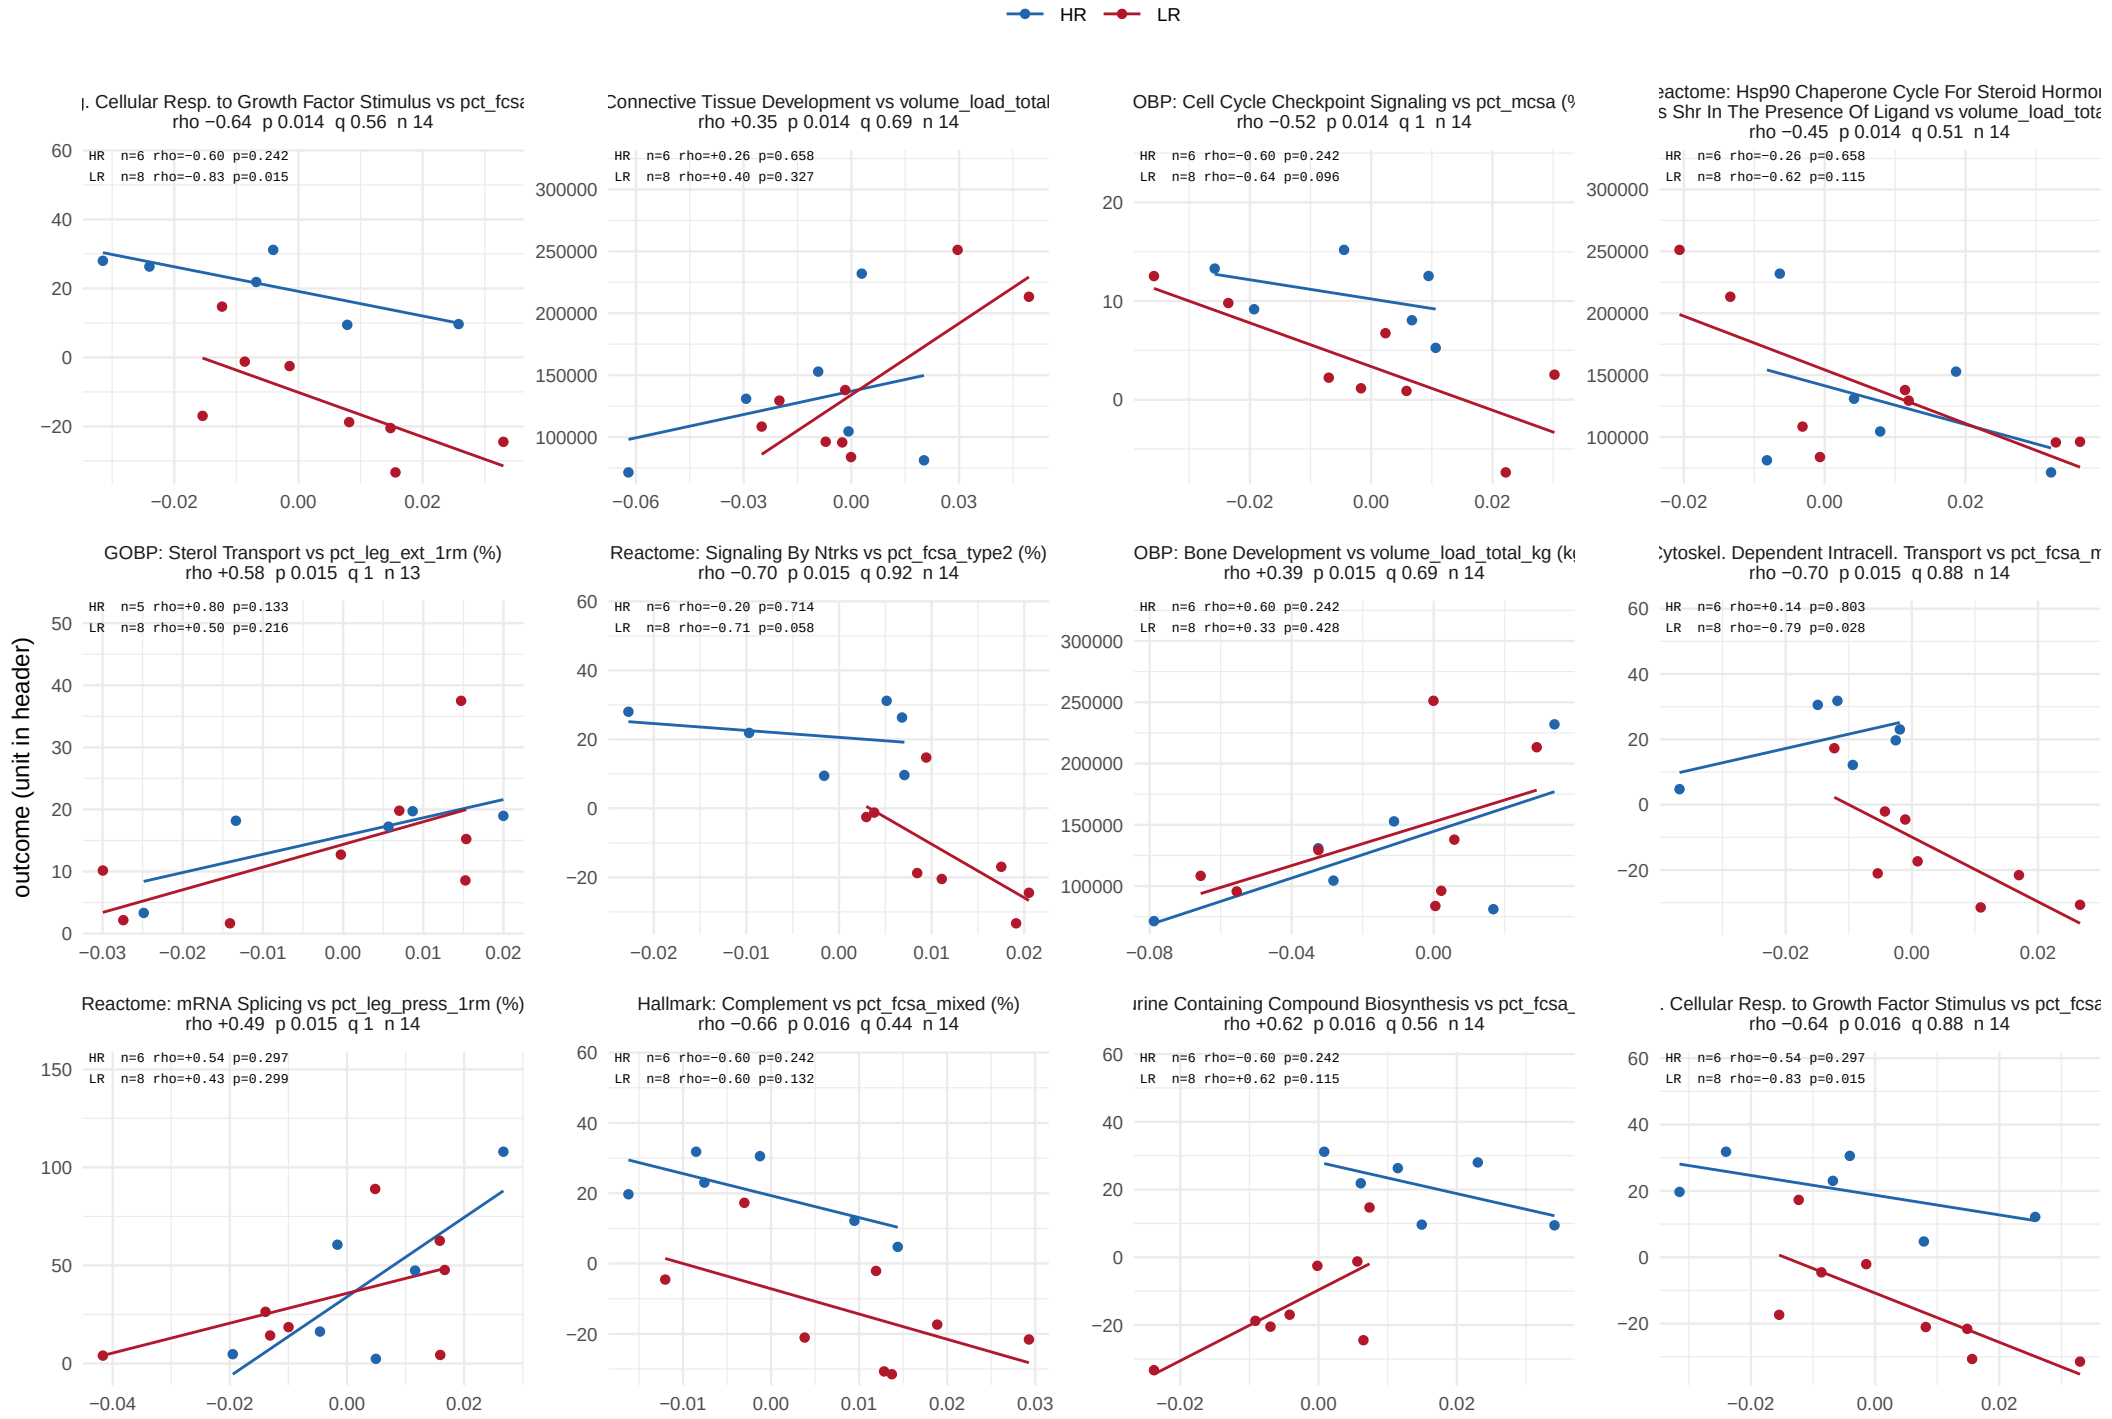

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


415 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 7 of 35.

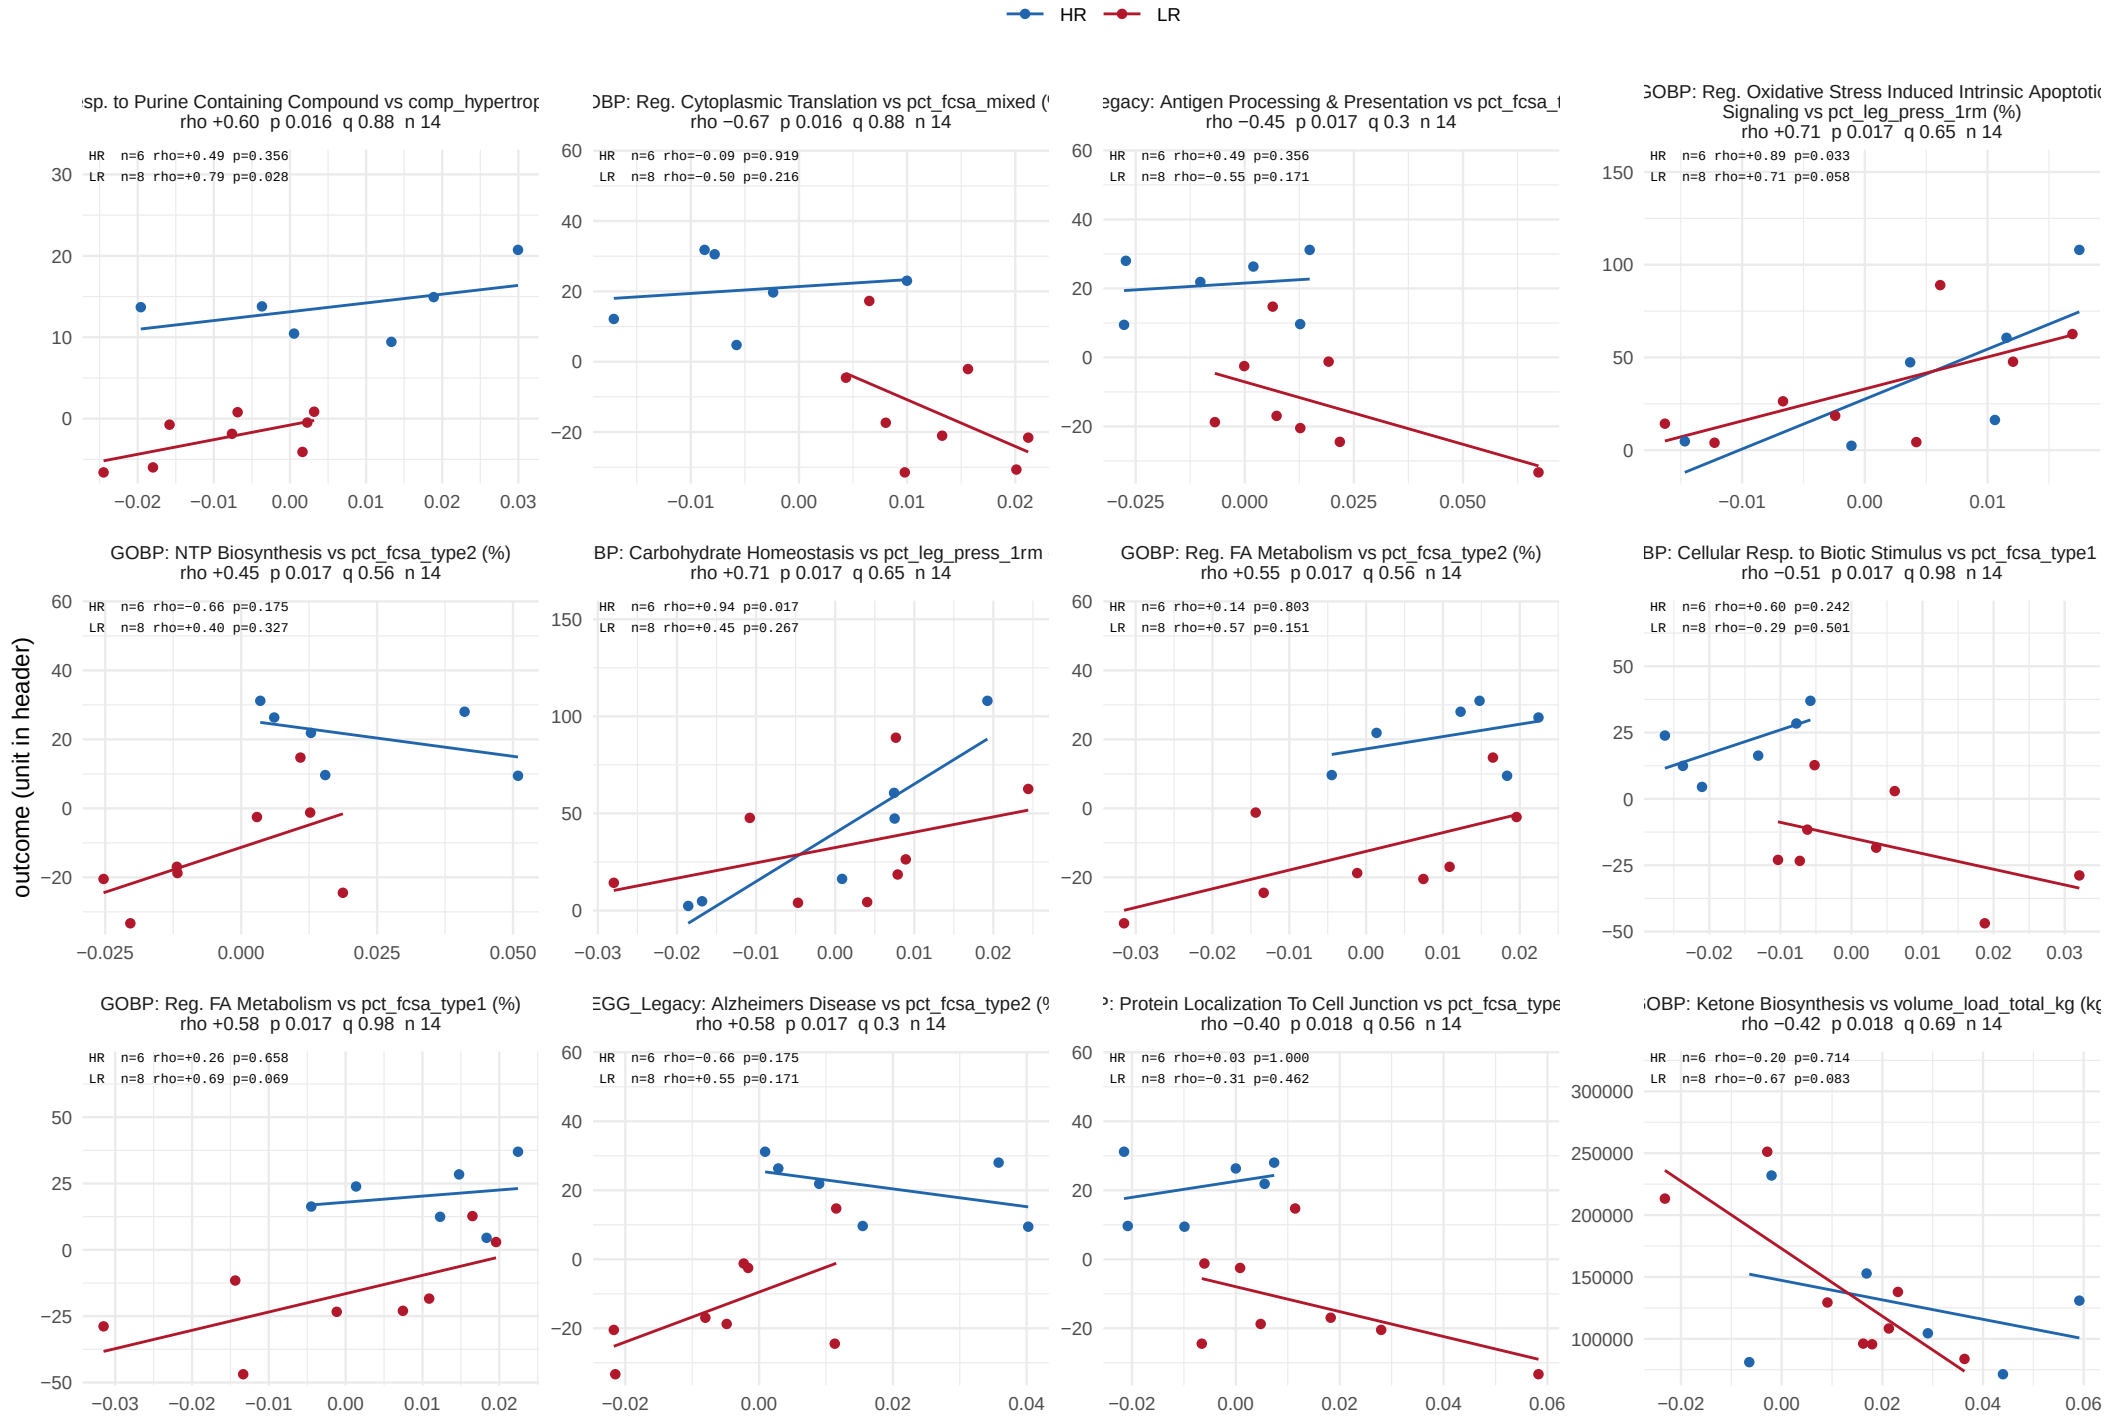

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


415 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 8 of 35.

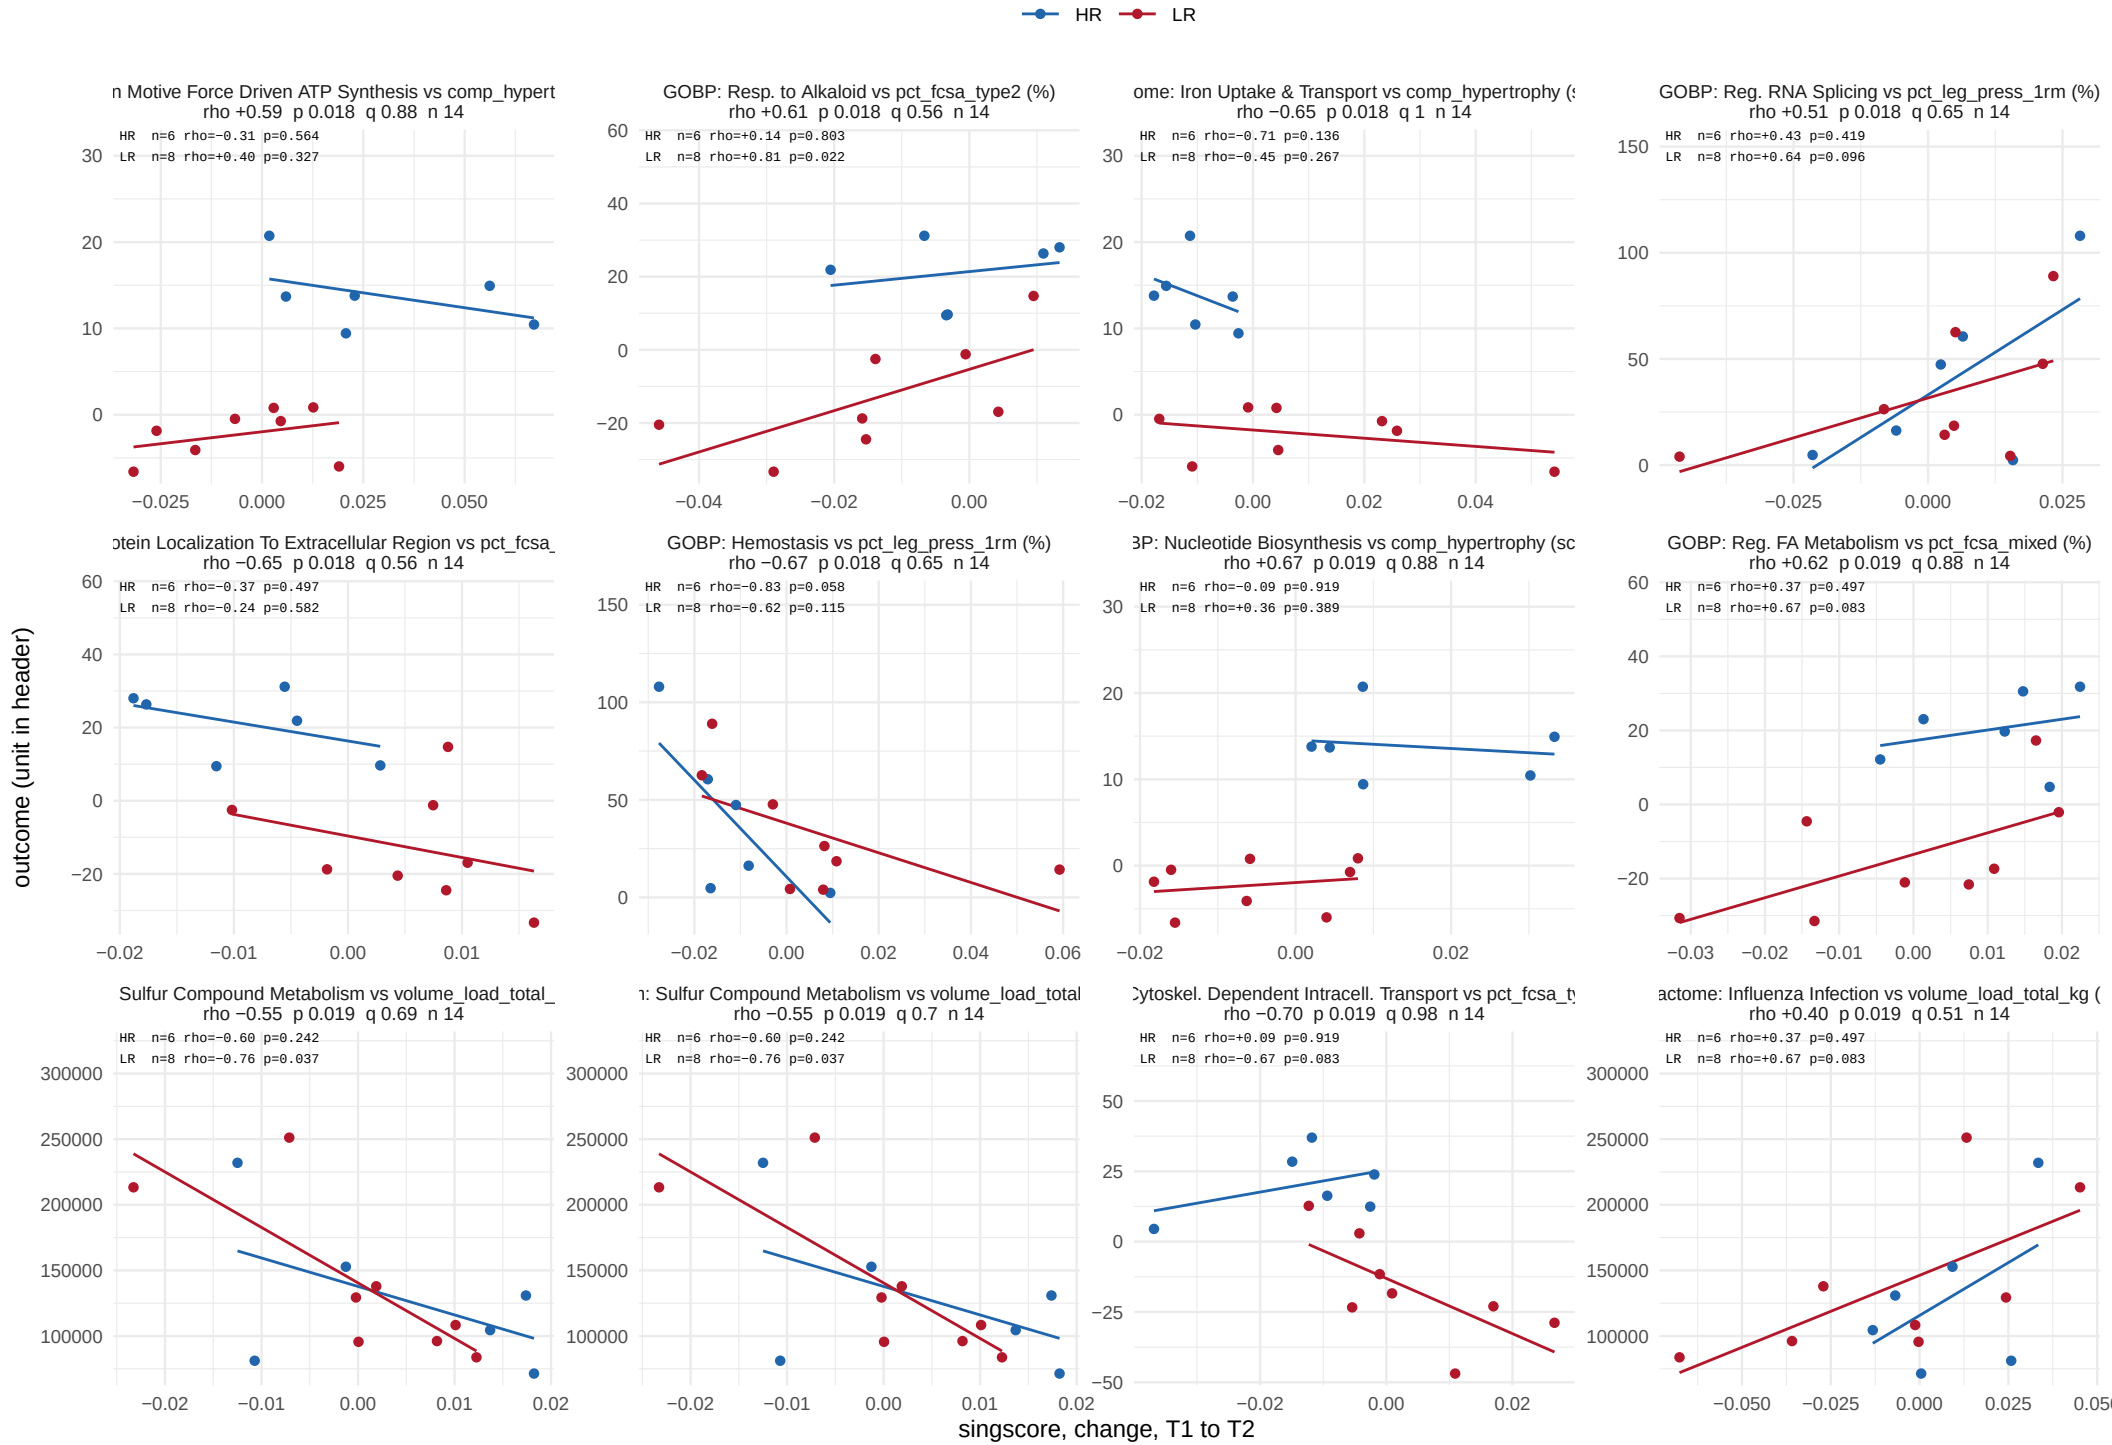

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


415 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 9 of 35.

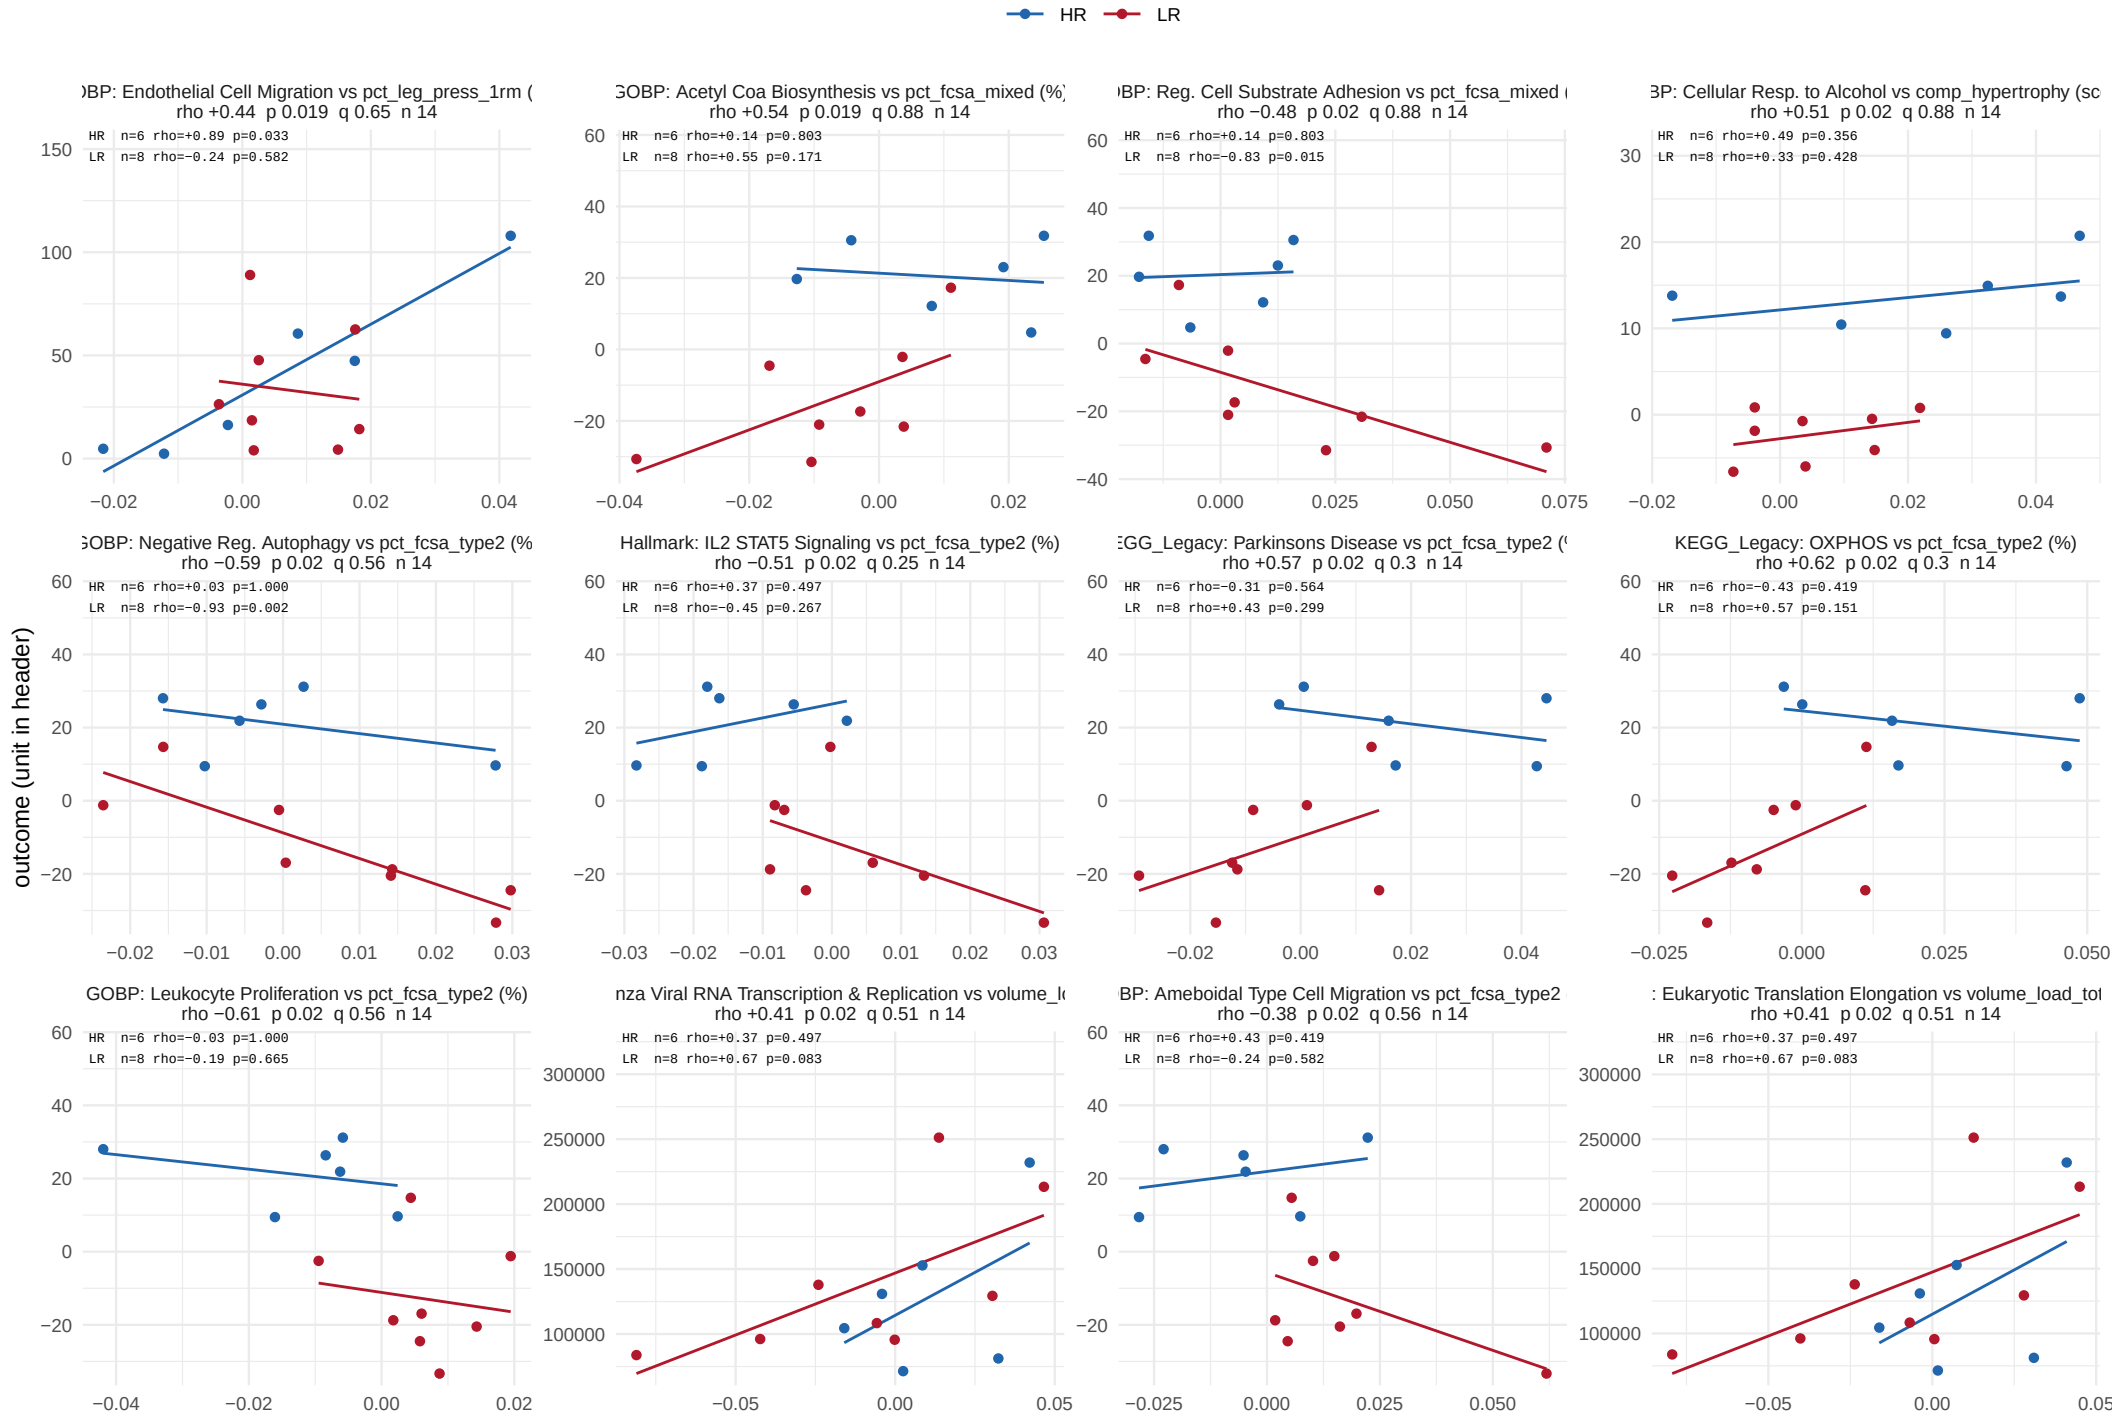

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


415 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 10 of 35.

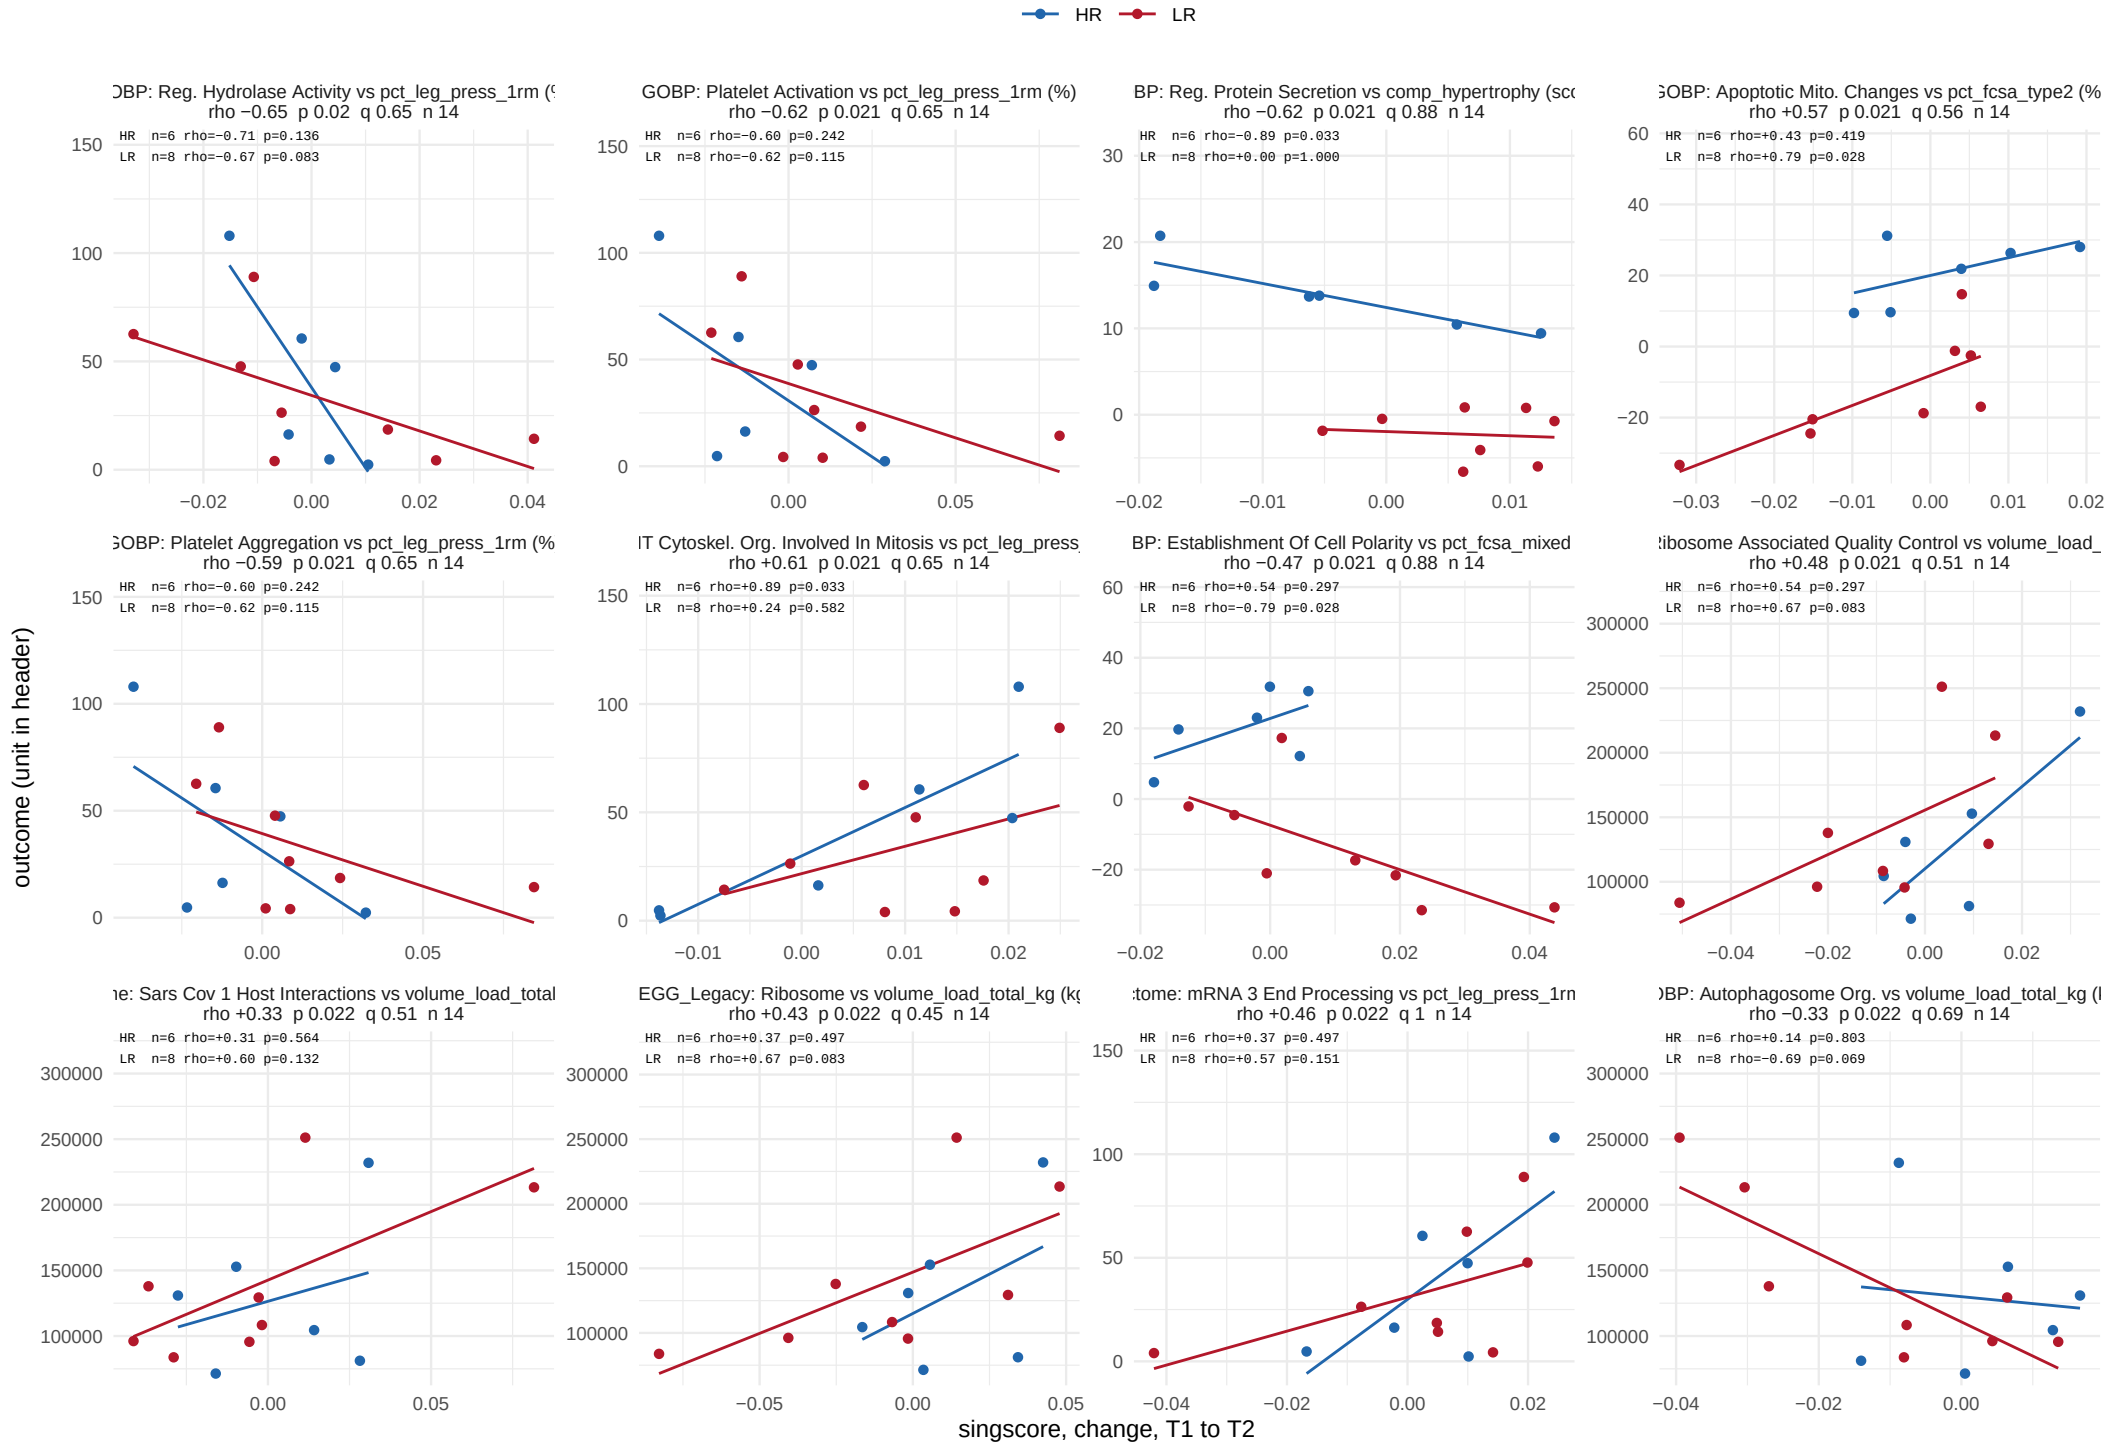

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


415 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 11 of 35.

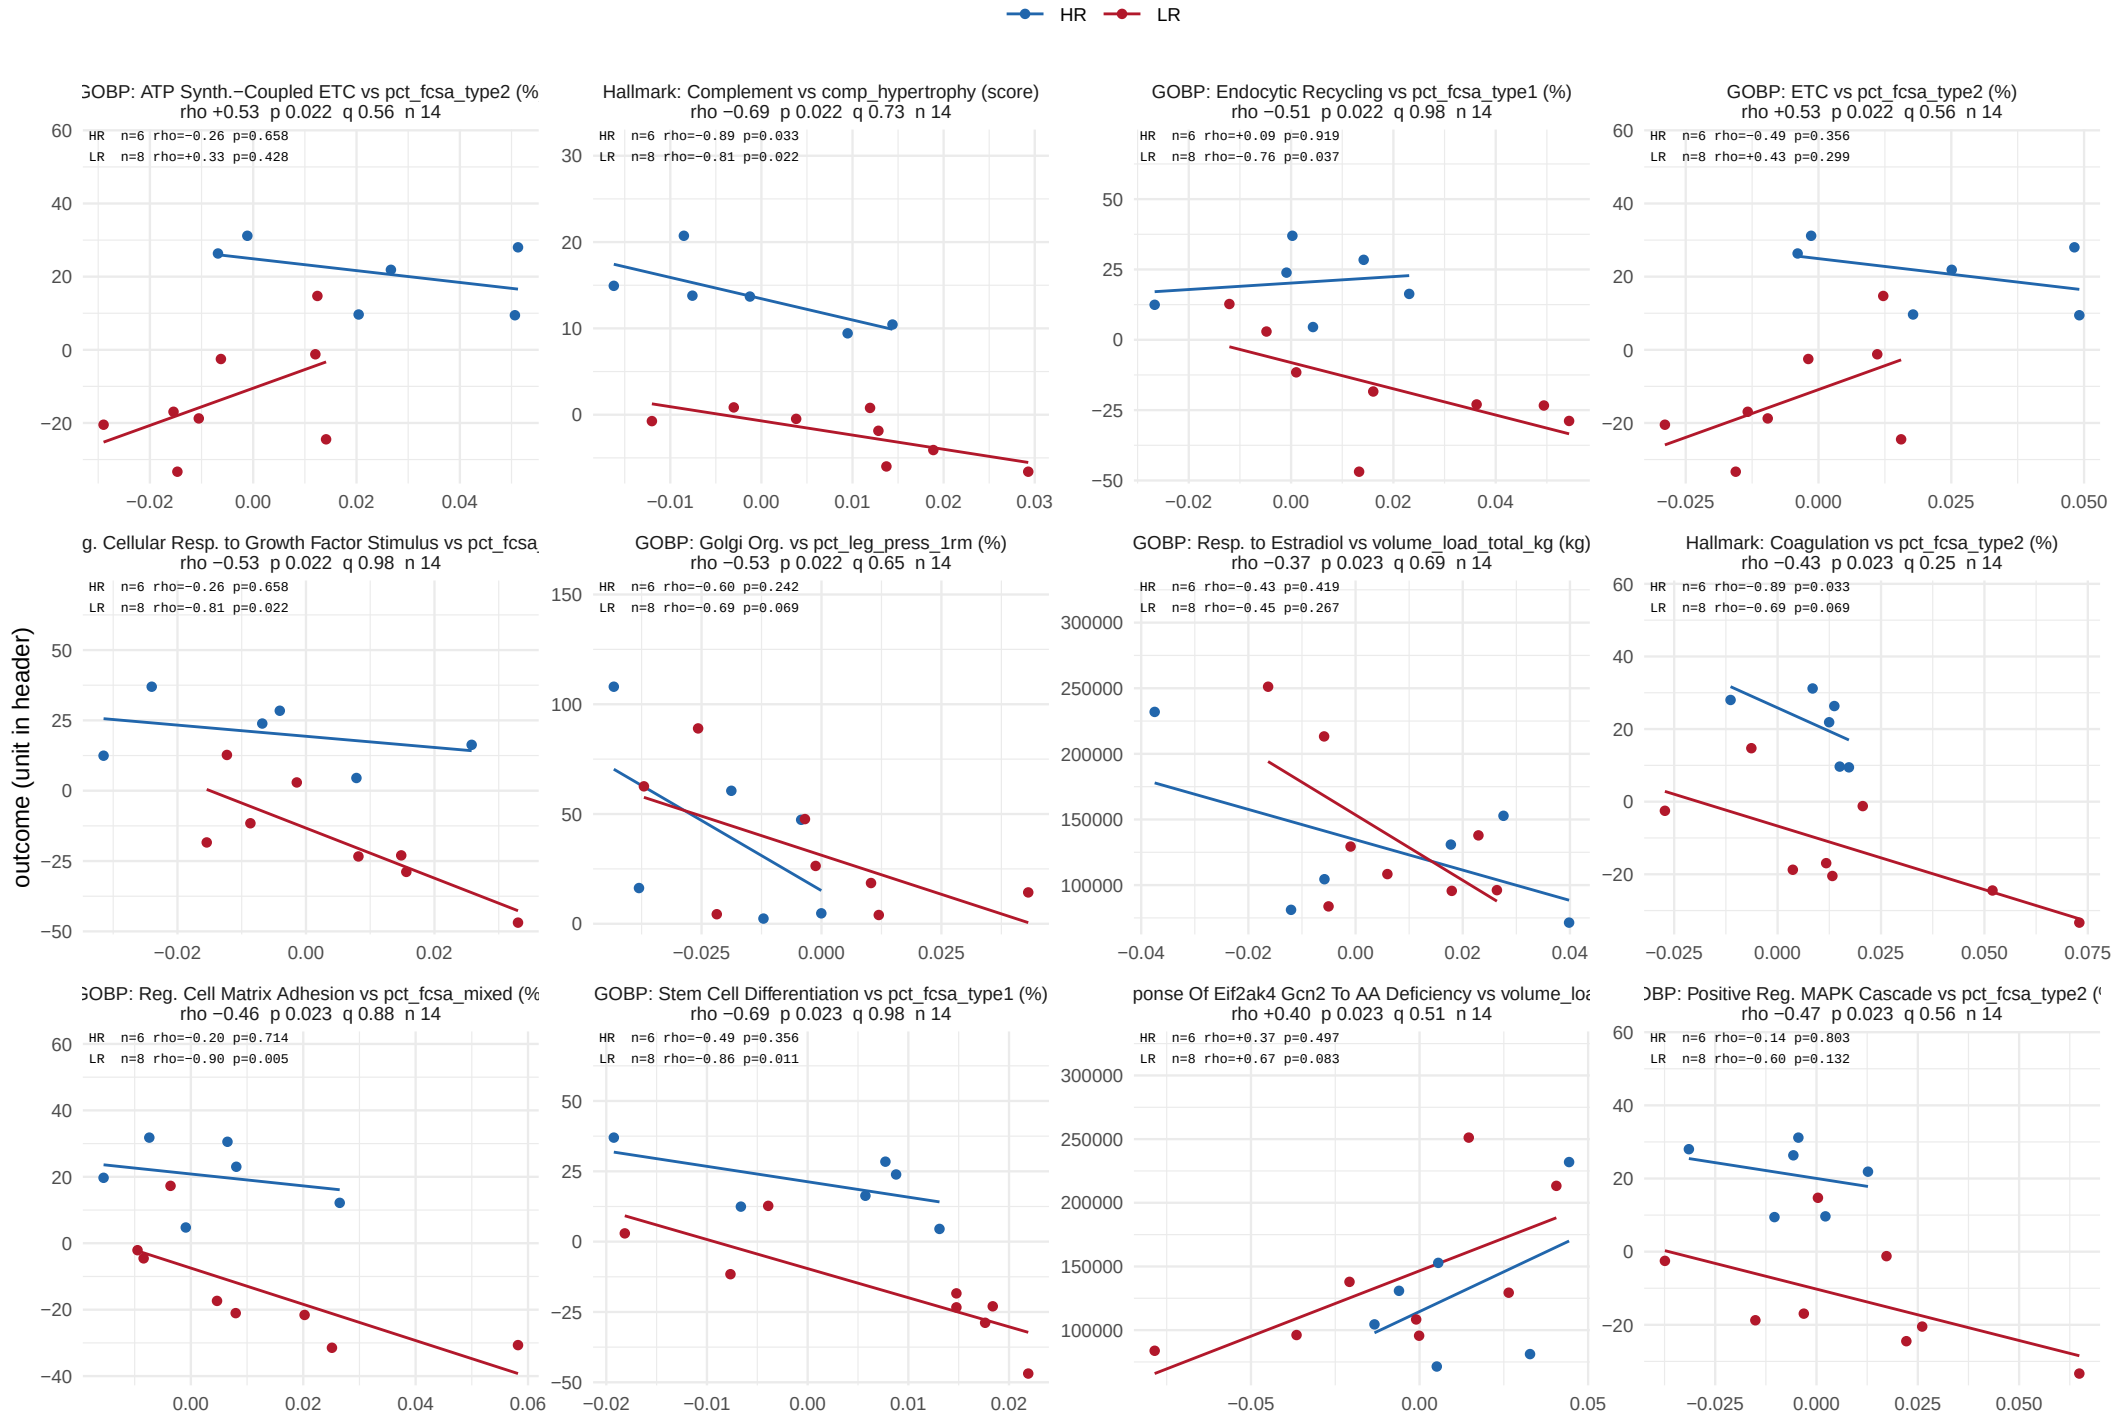

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


415 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 12 of 35.

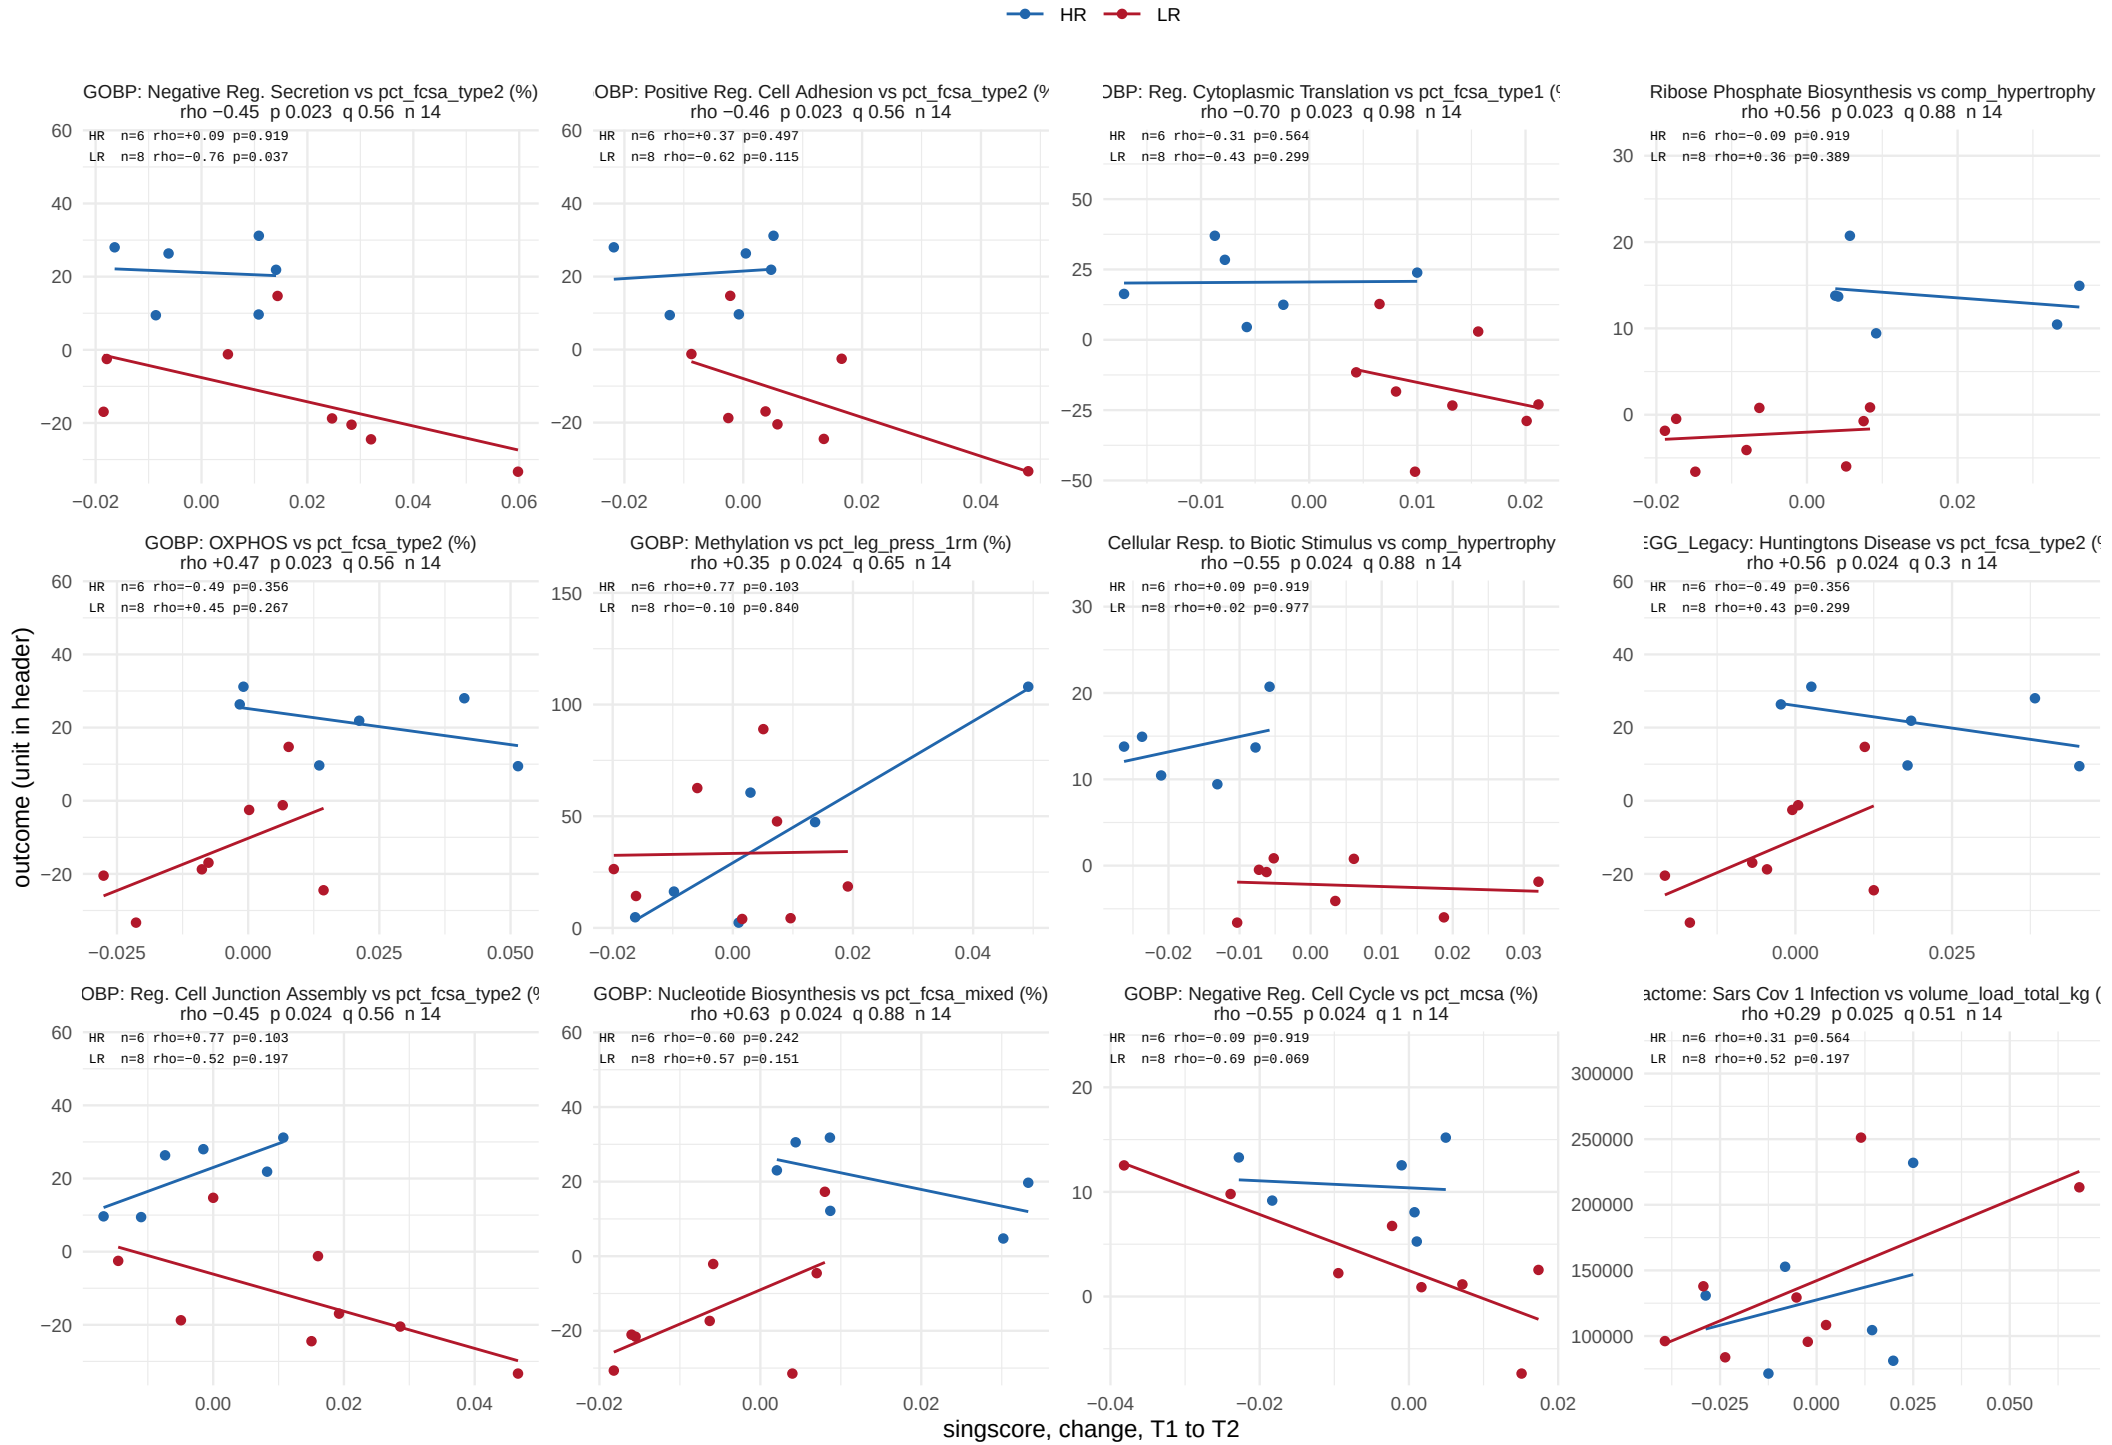

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


415 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 13 of 35.

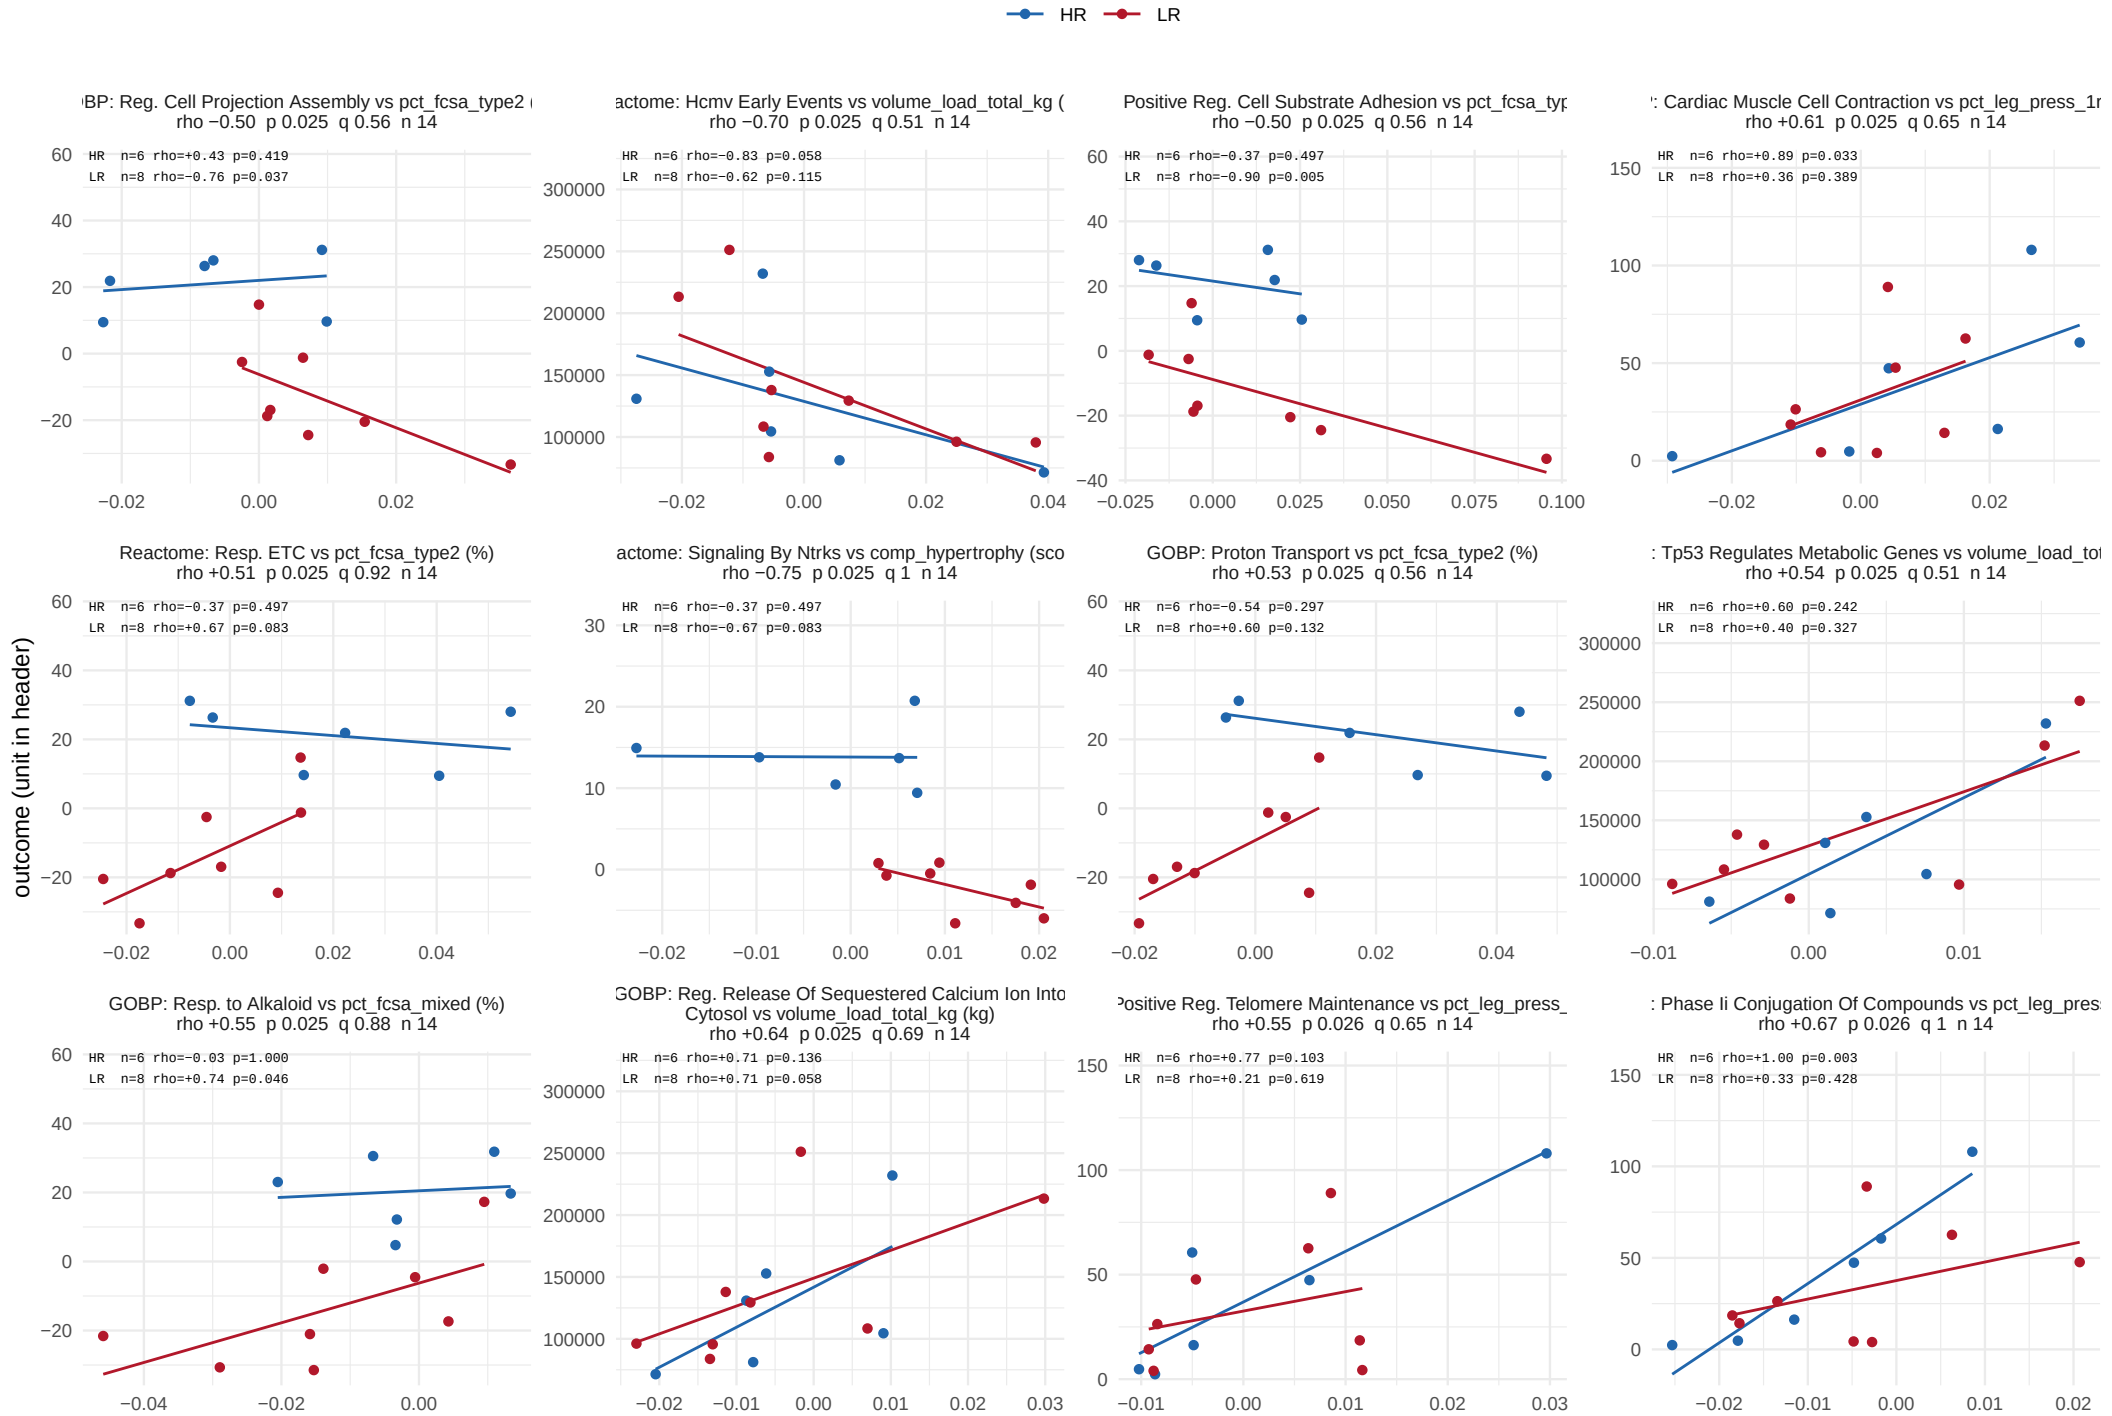

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


415 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 14 of 35.

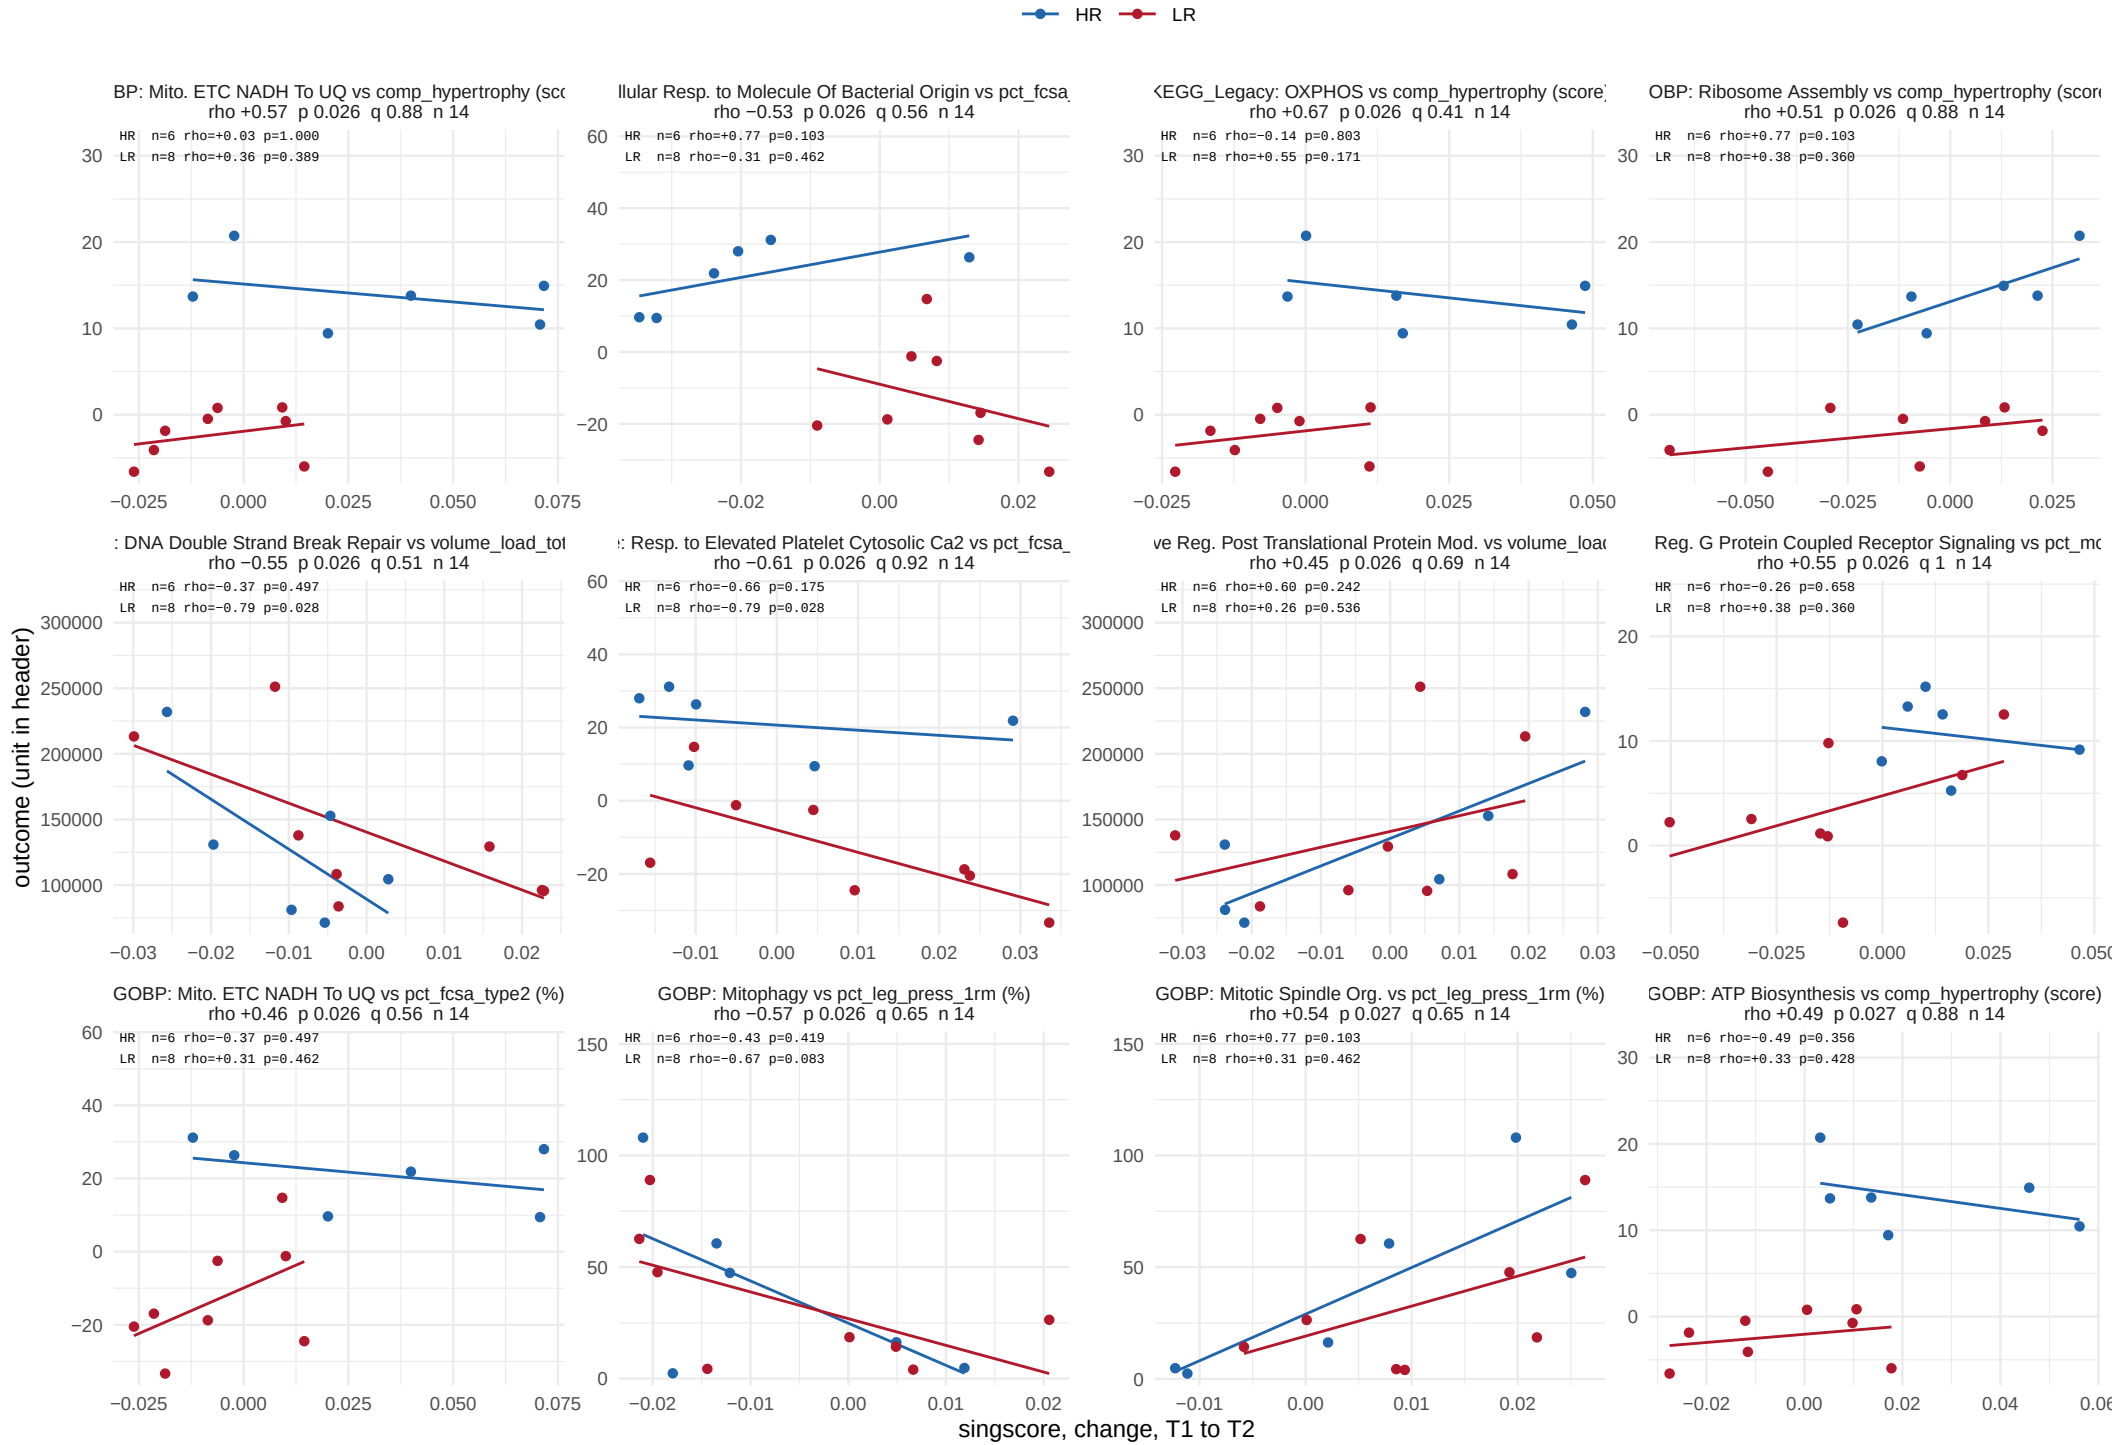

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


415 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 15 of 35.

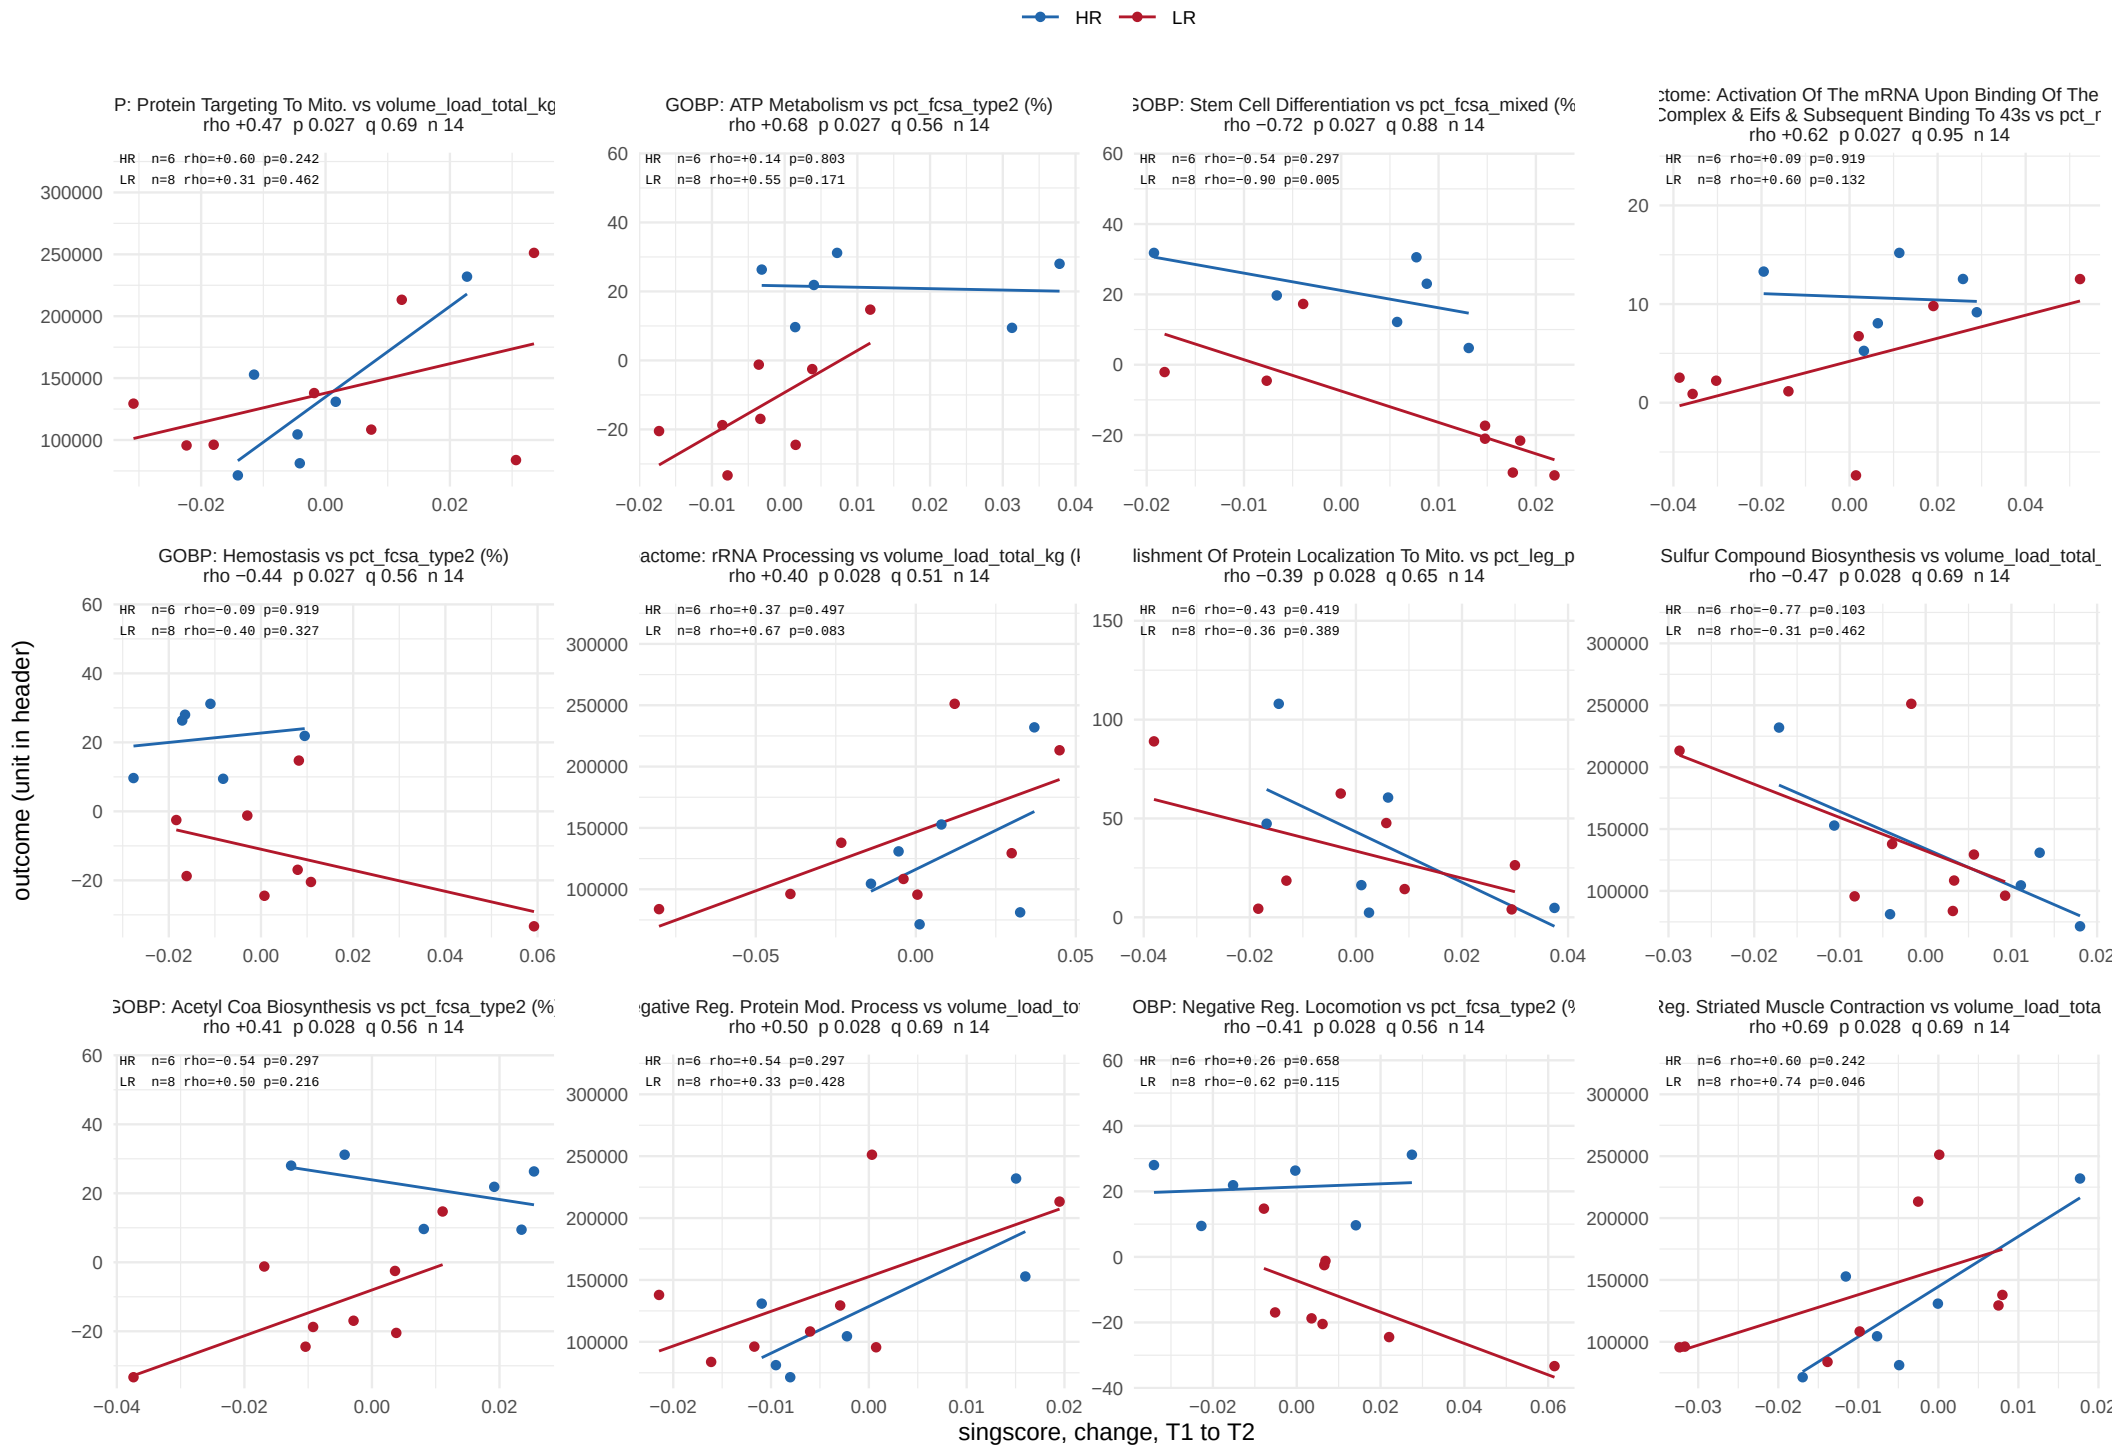

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


415 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 16 of 35.

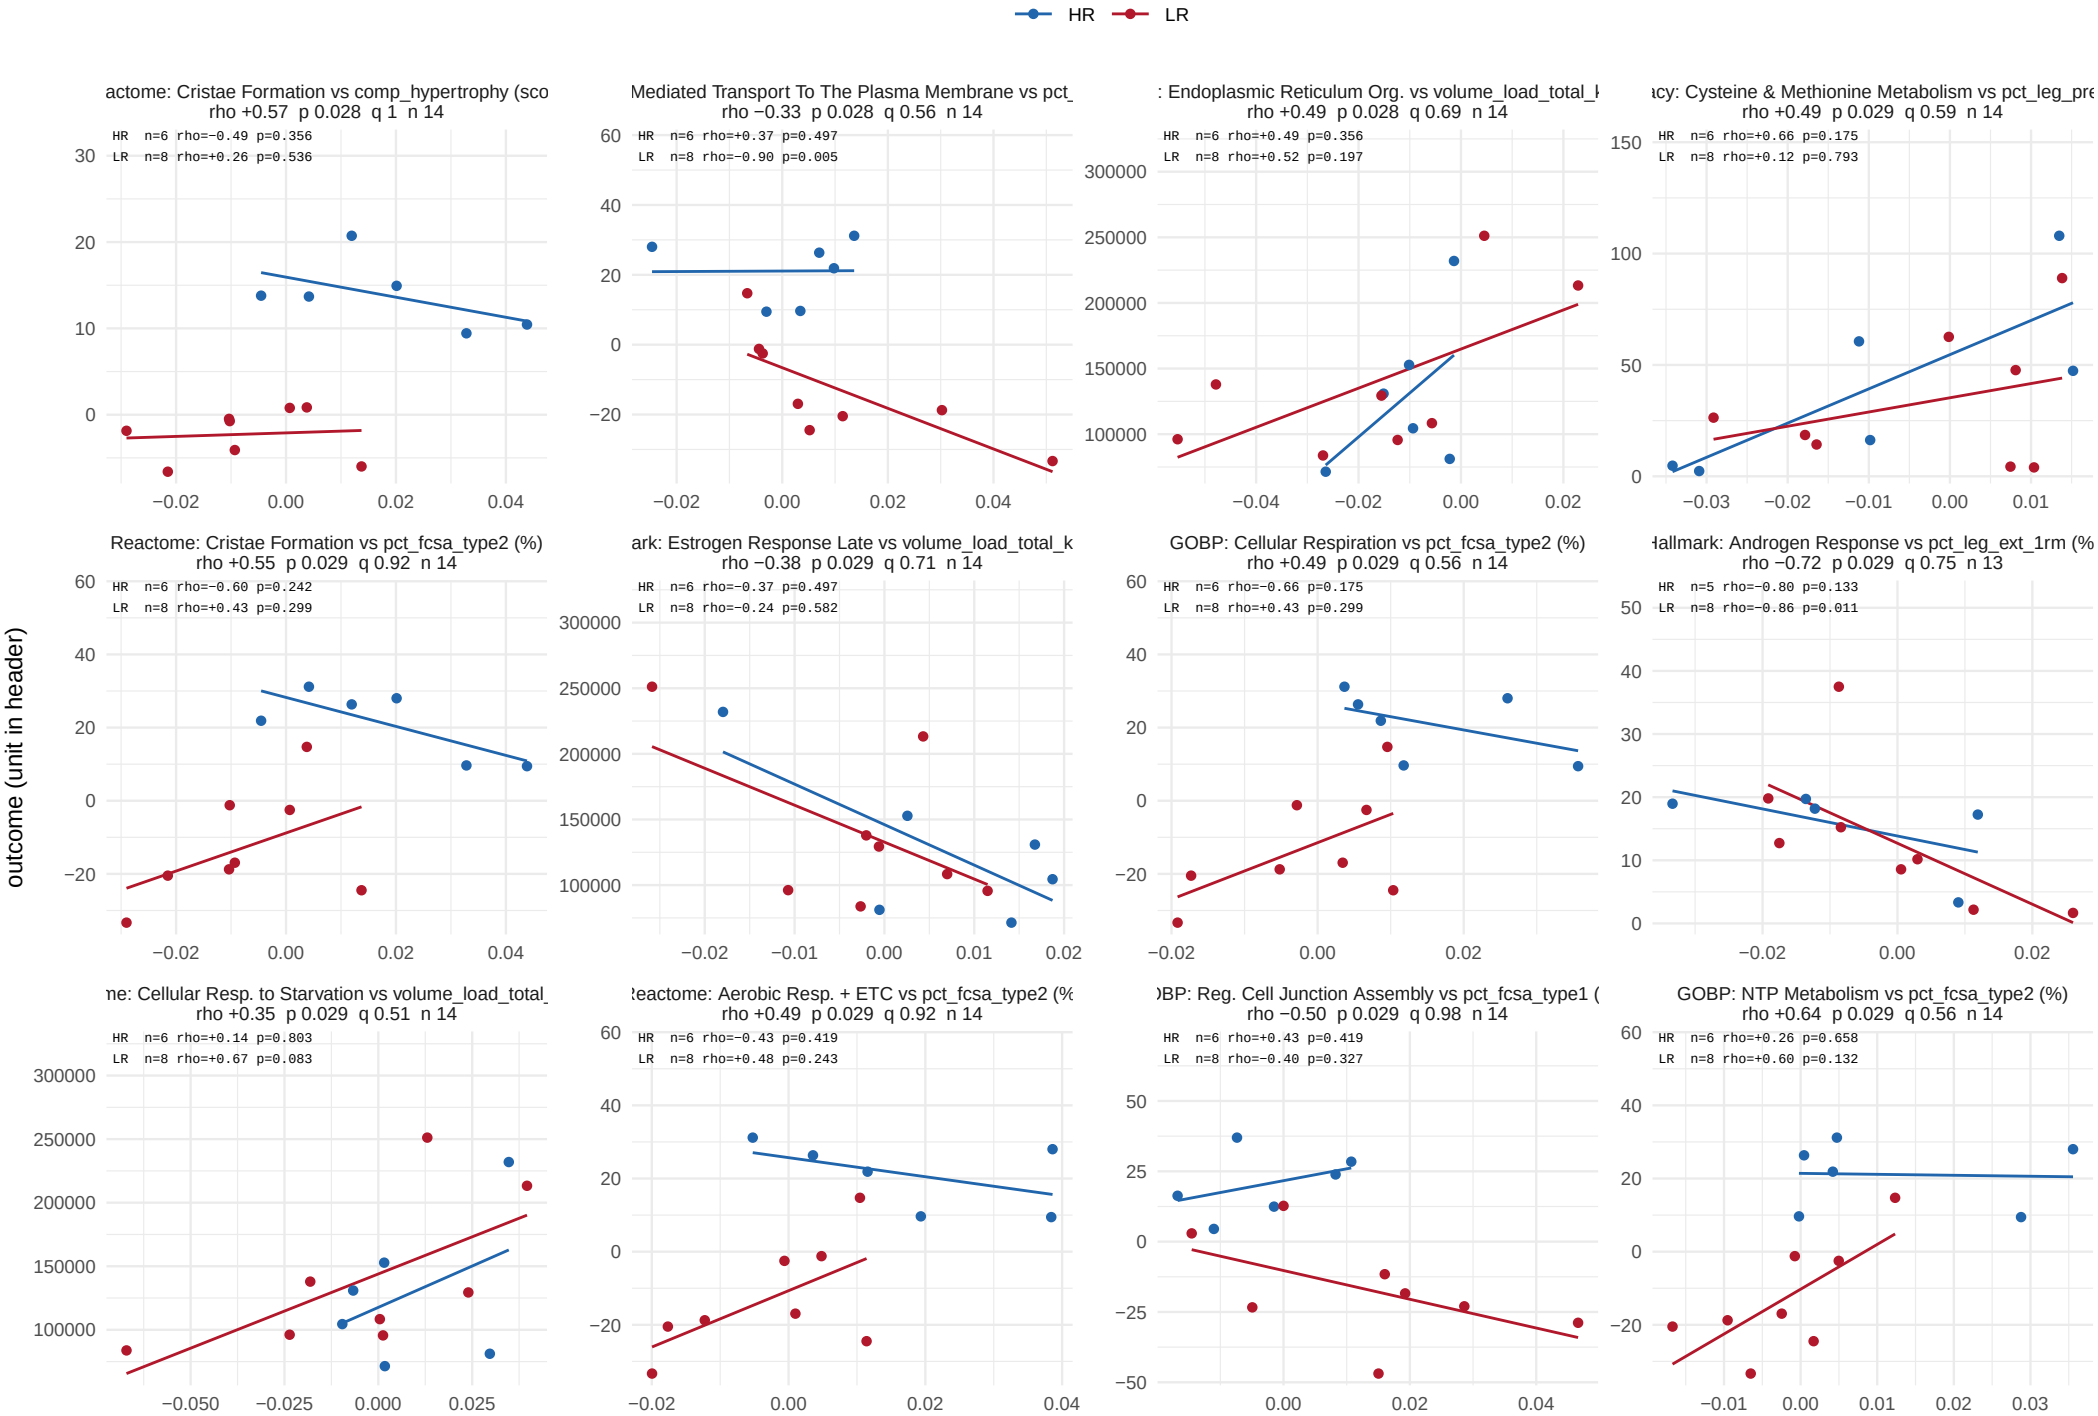

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


415 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 17 of 35.

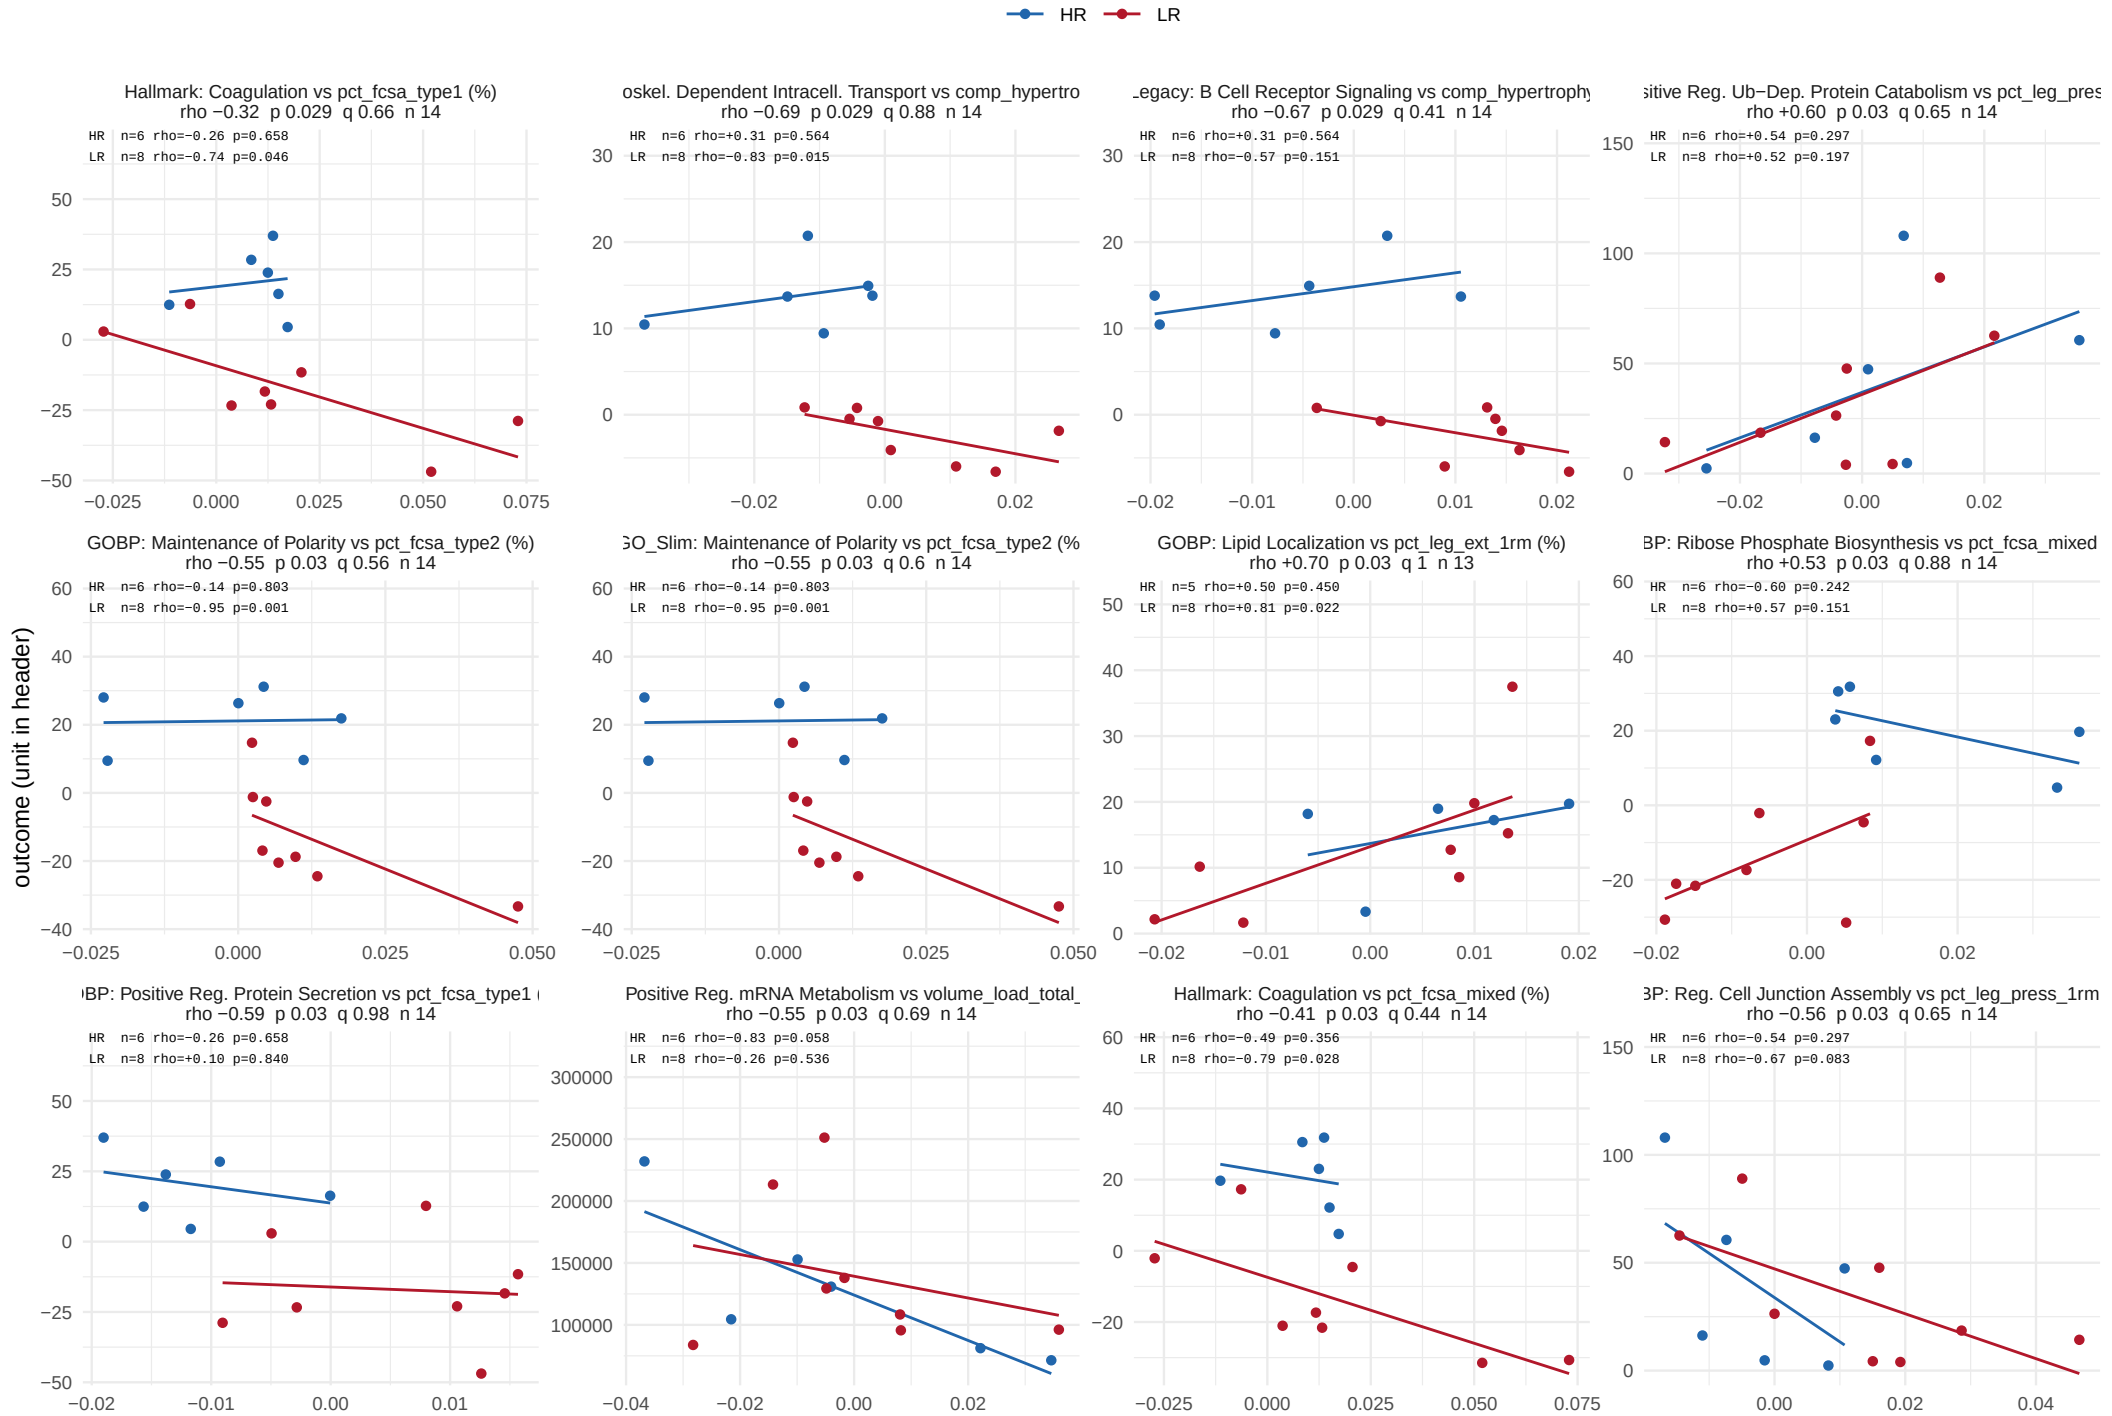

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


415 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 18 of 35.

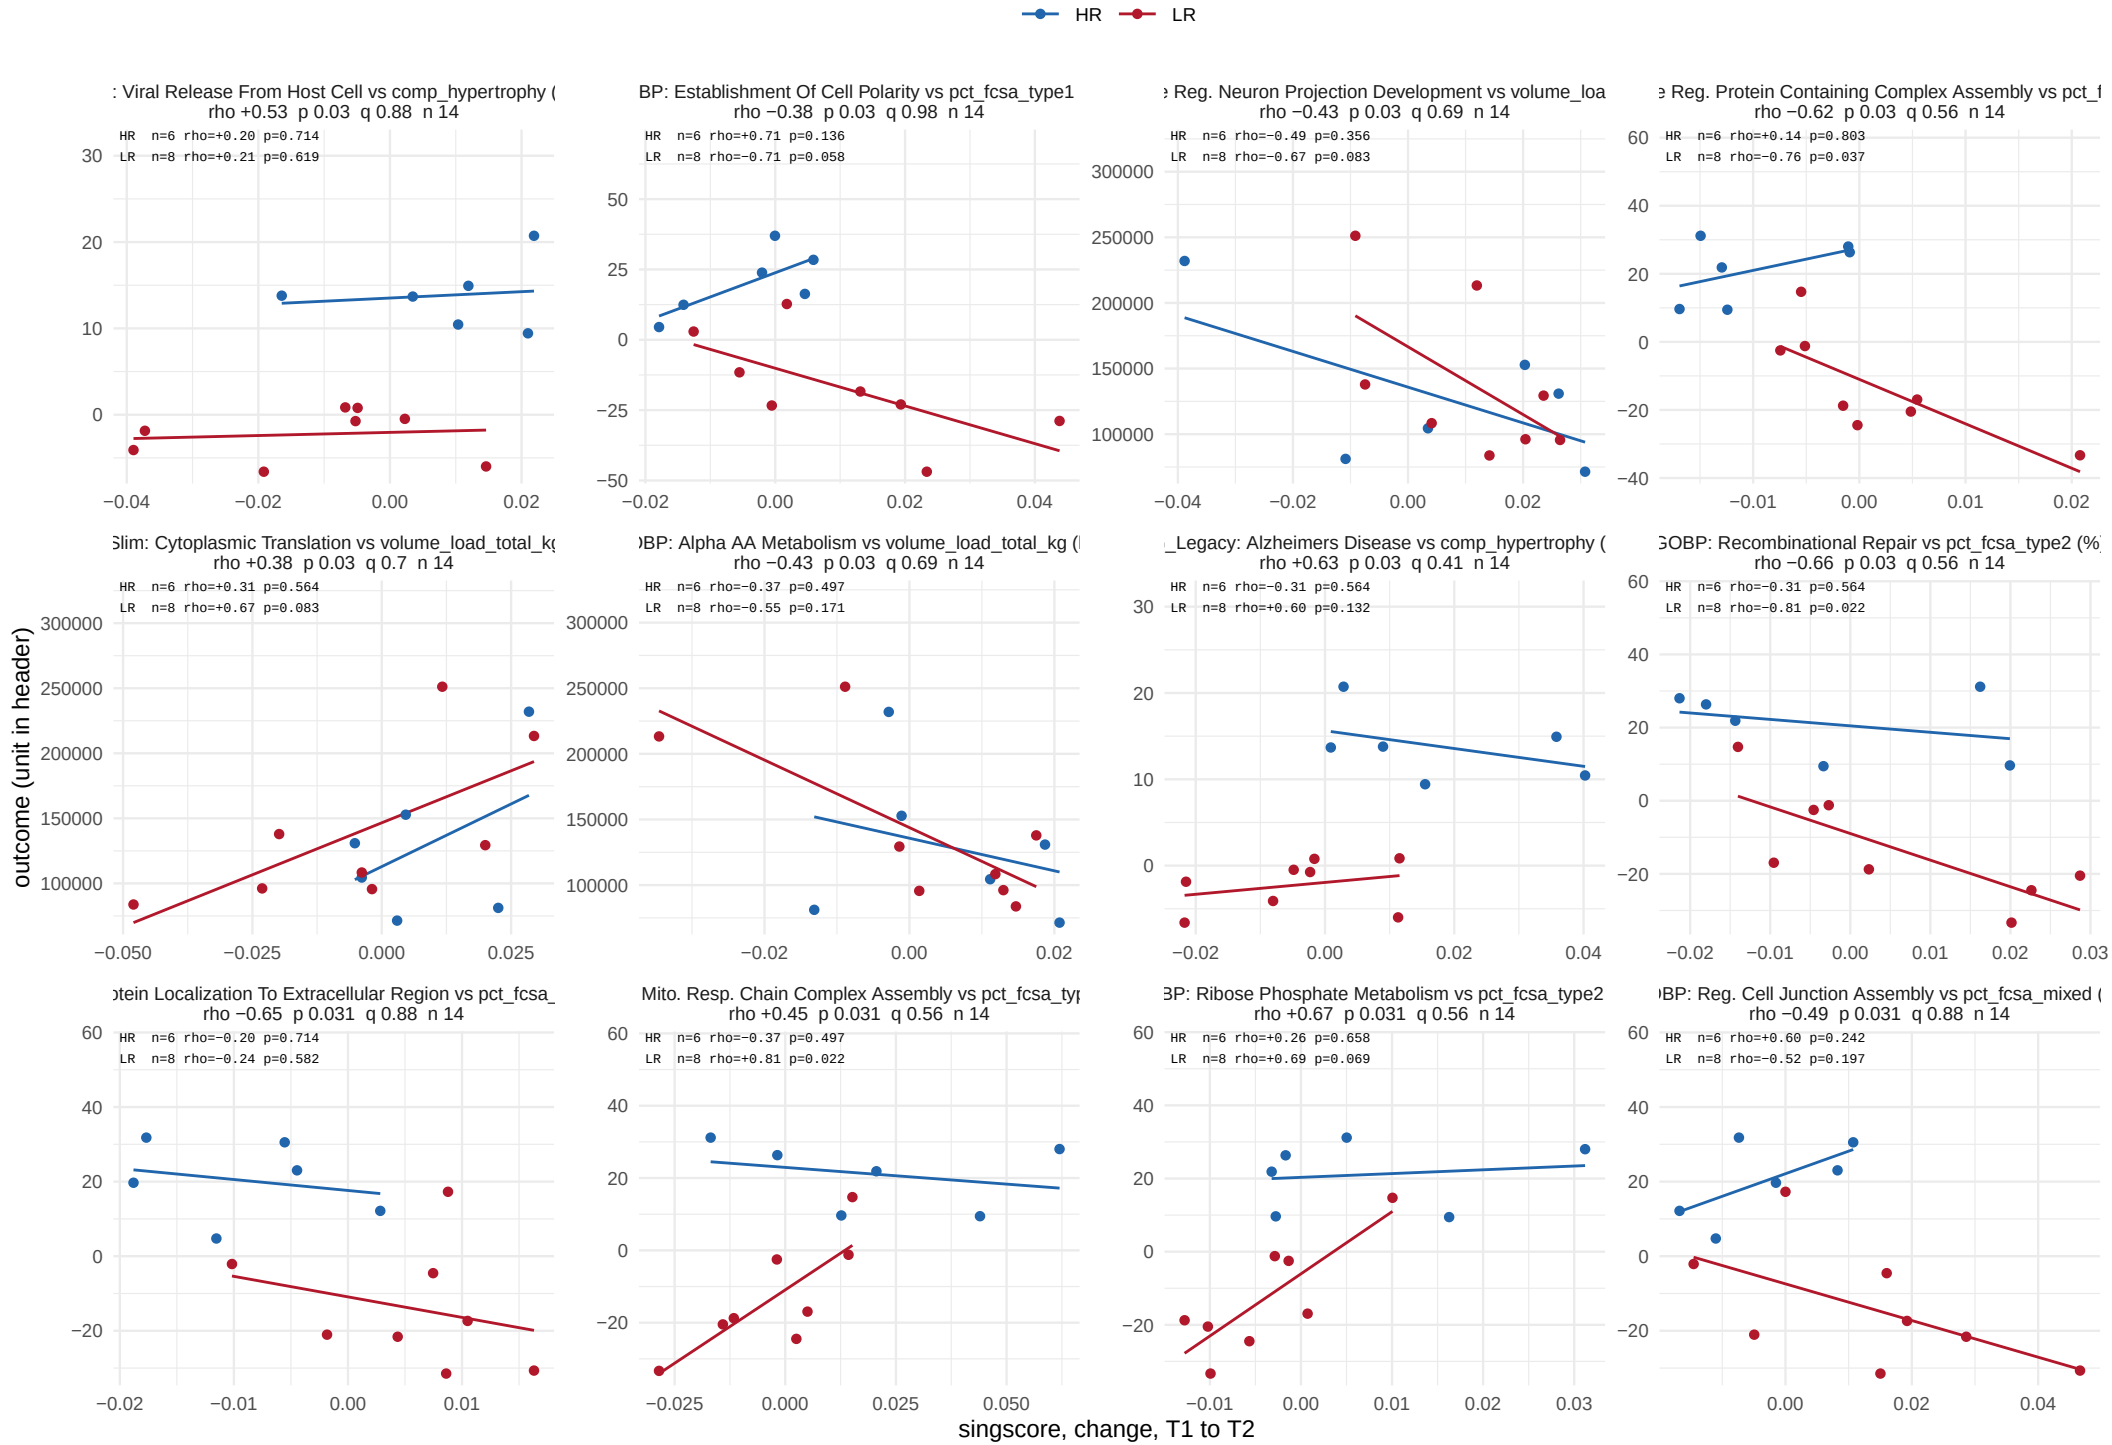

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


415 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 19 of 35.

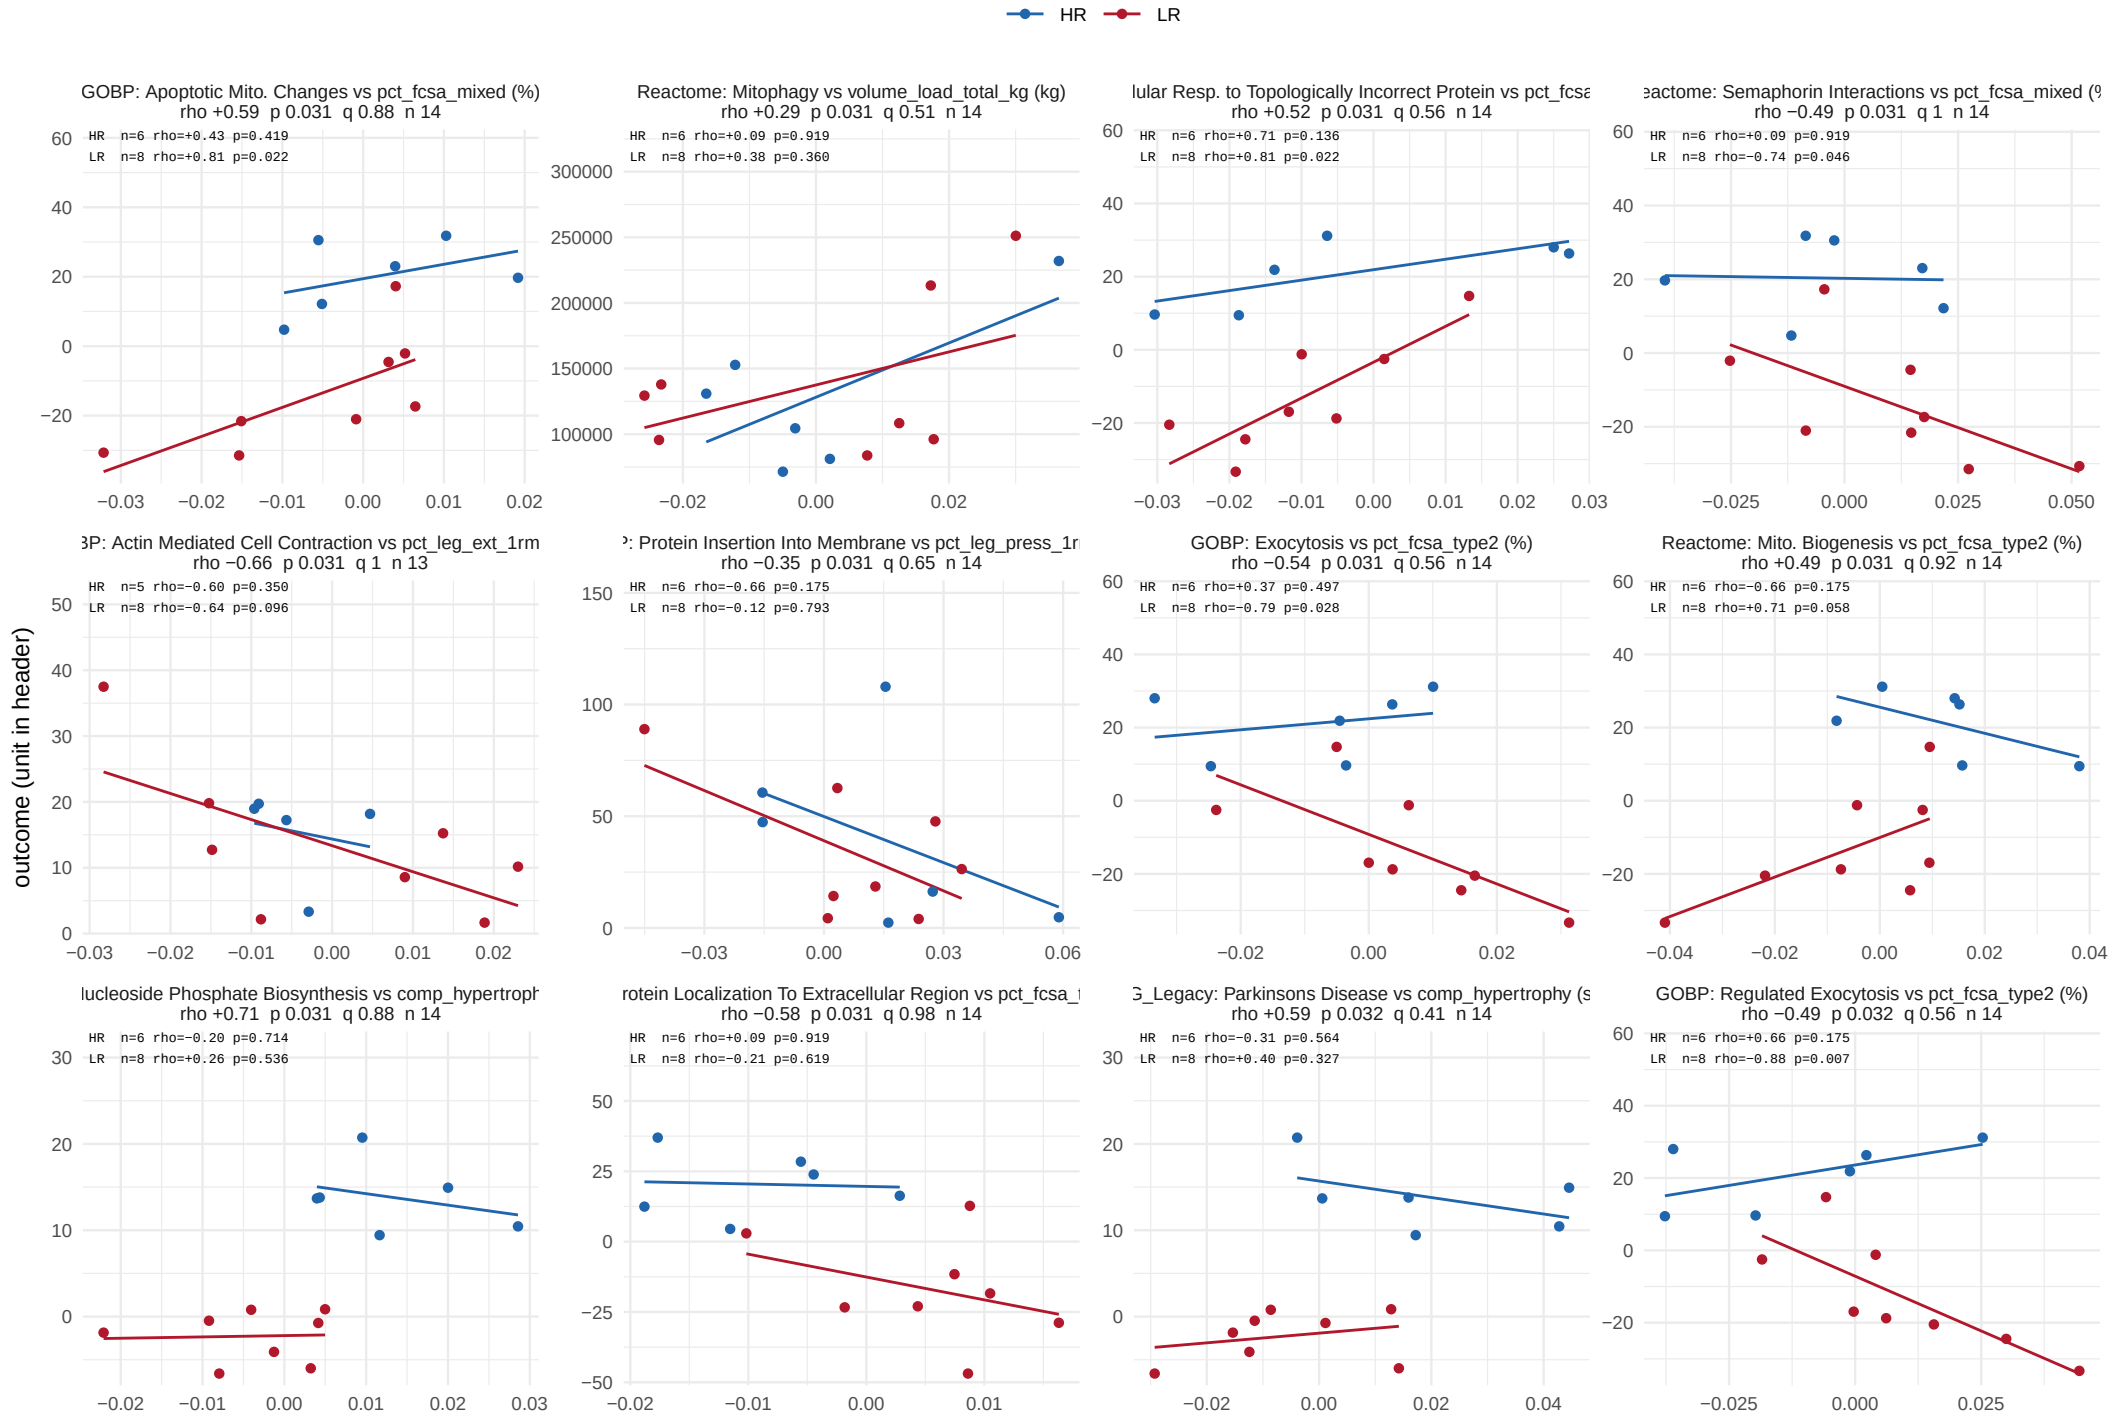

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


415 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 20 of 35.

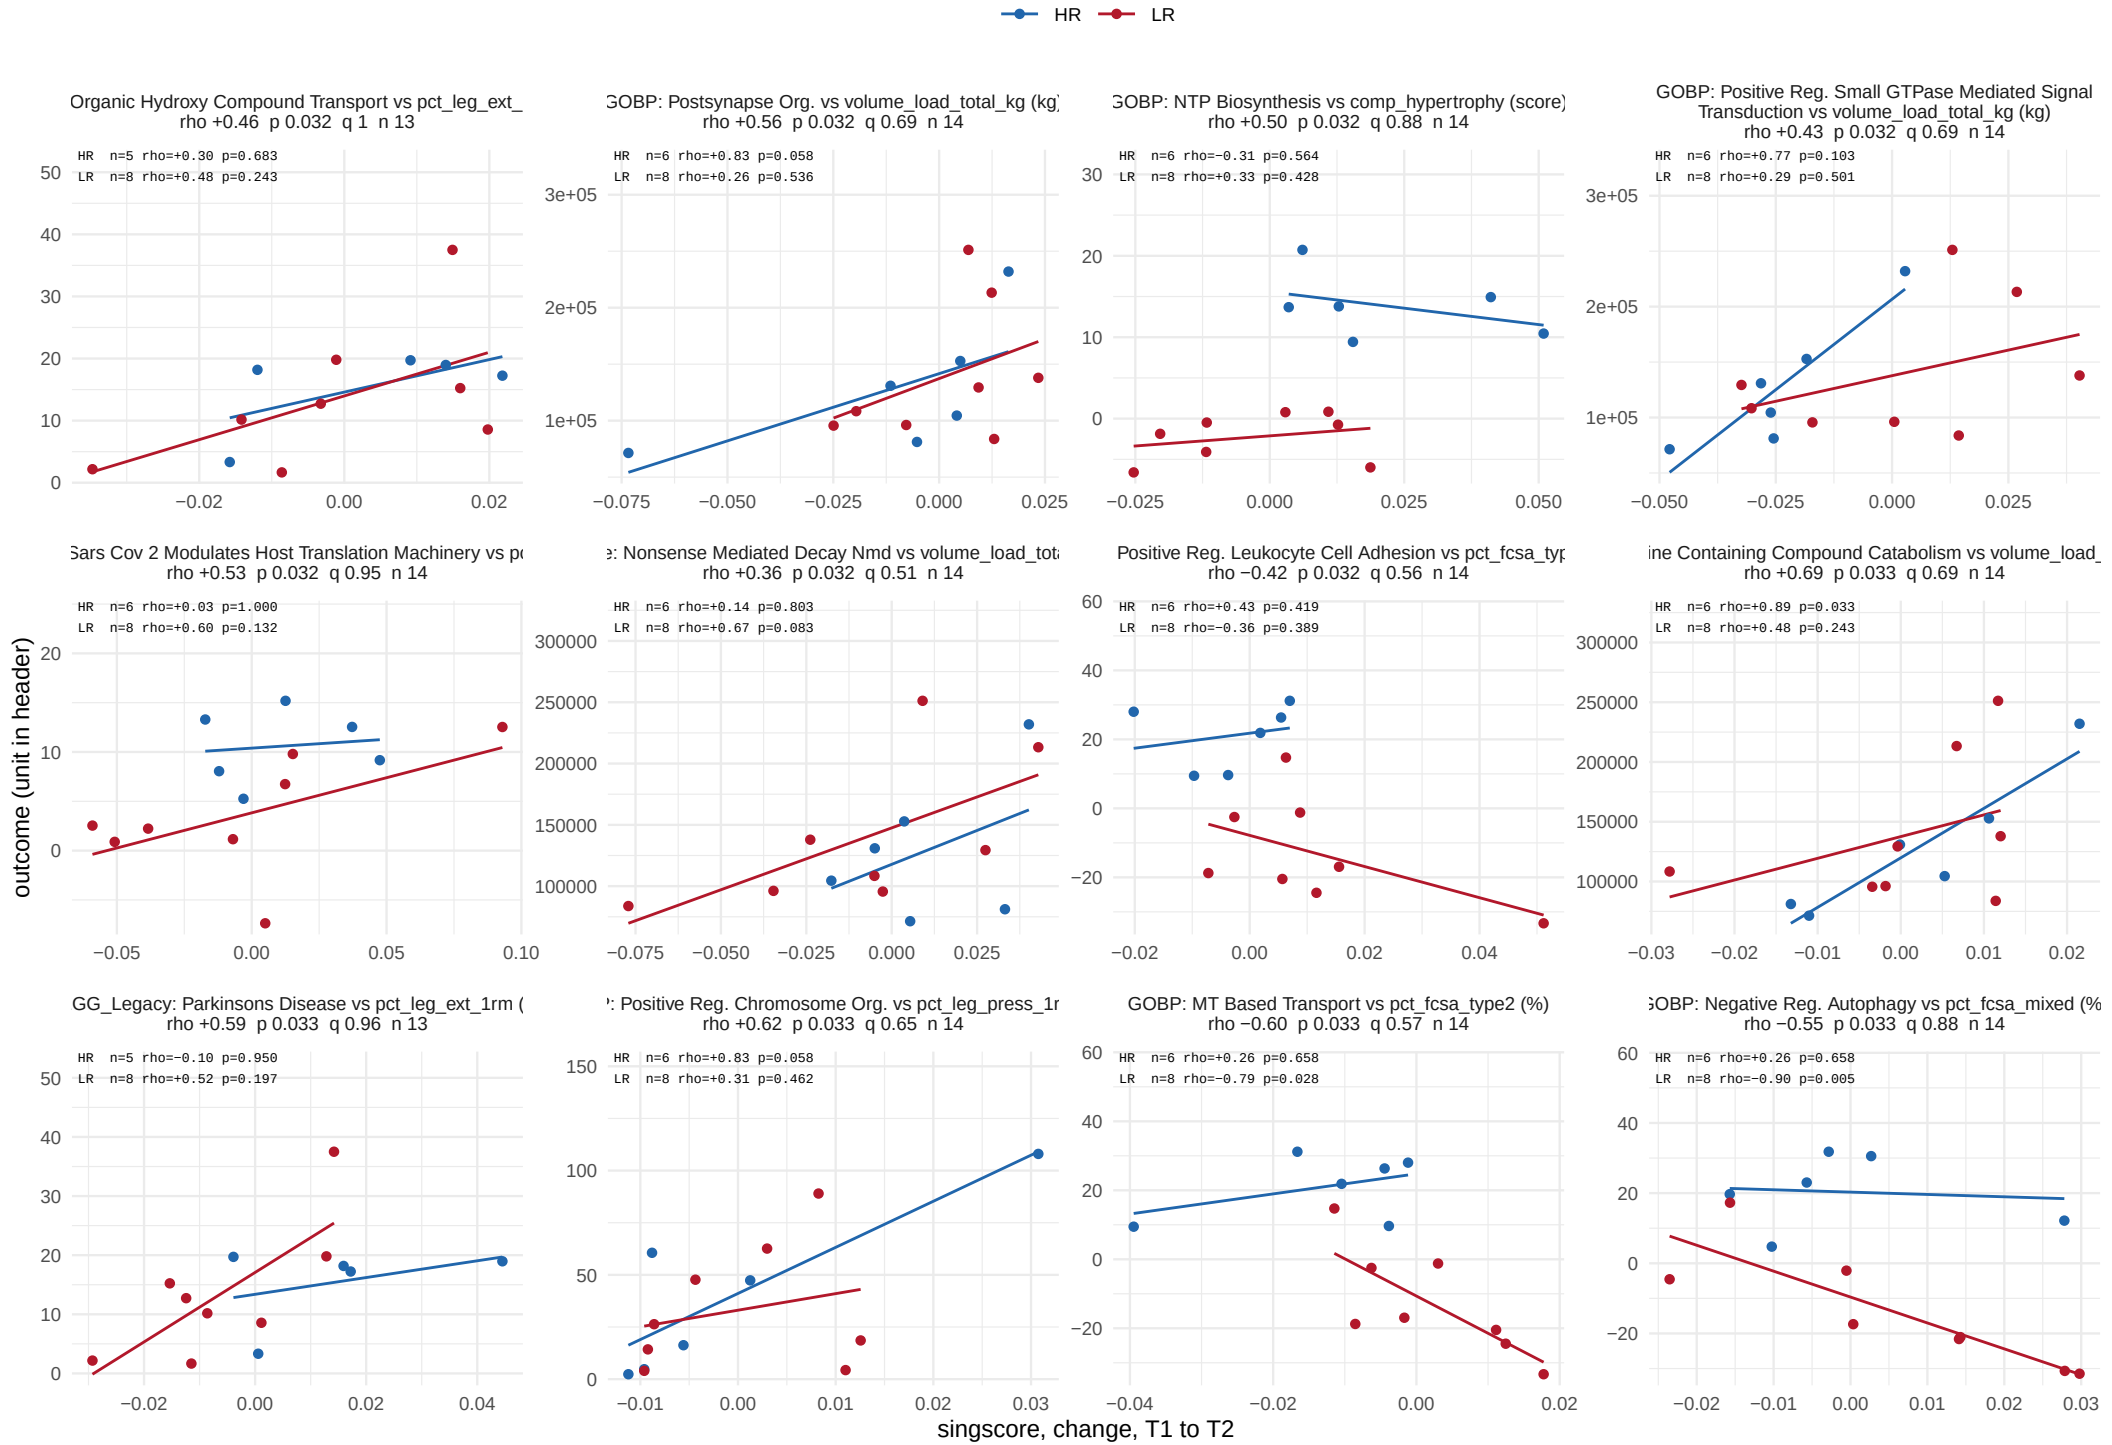

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


415 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 21 of 35.

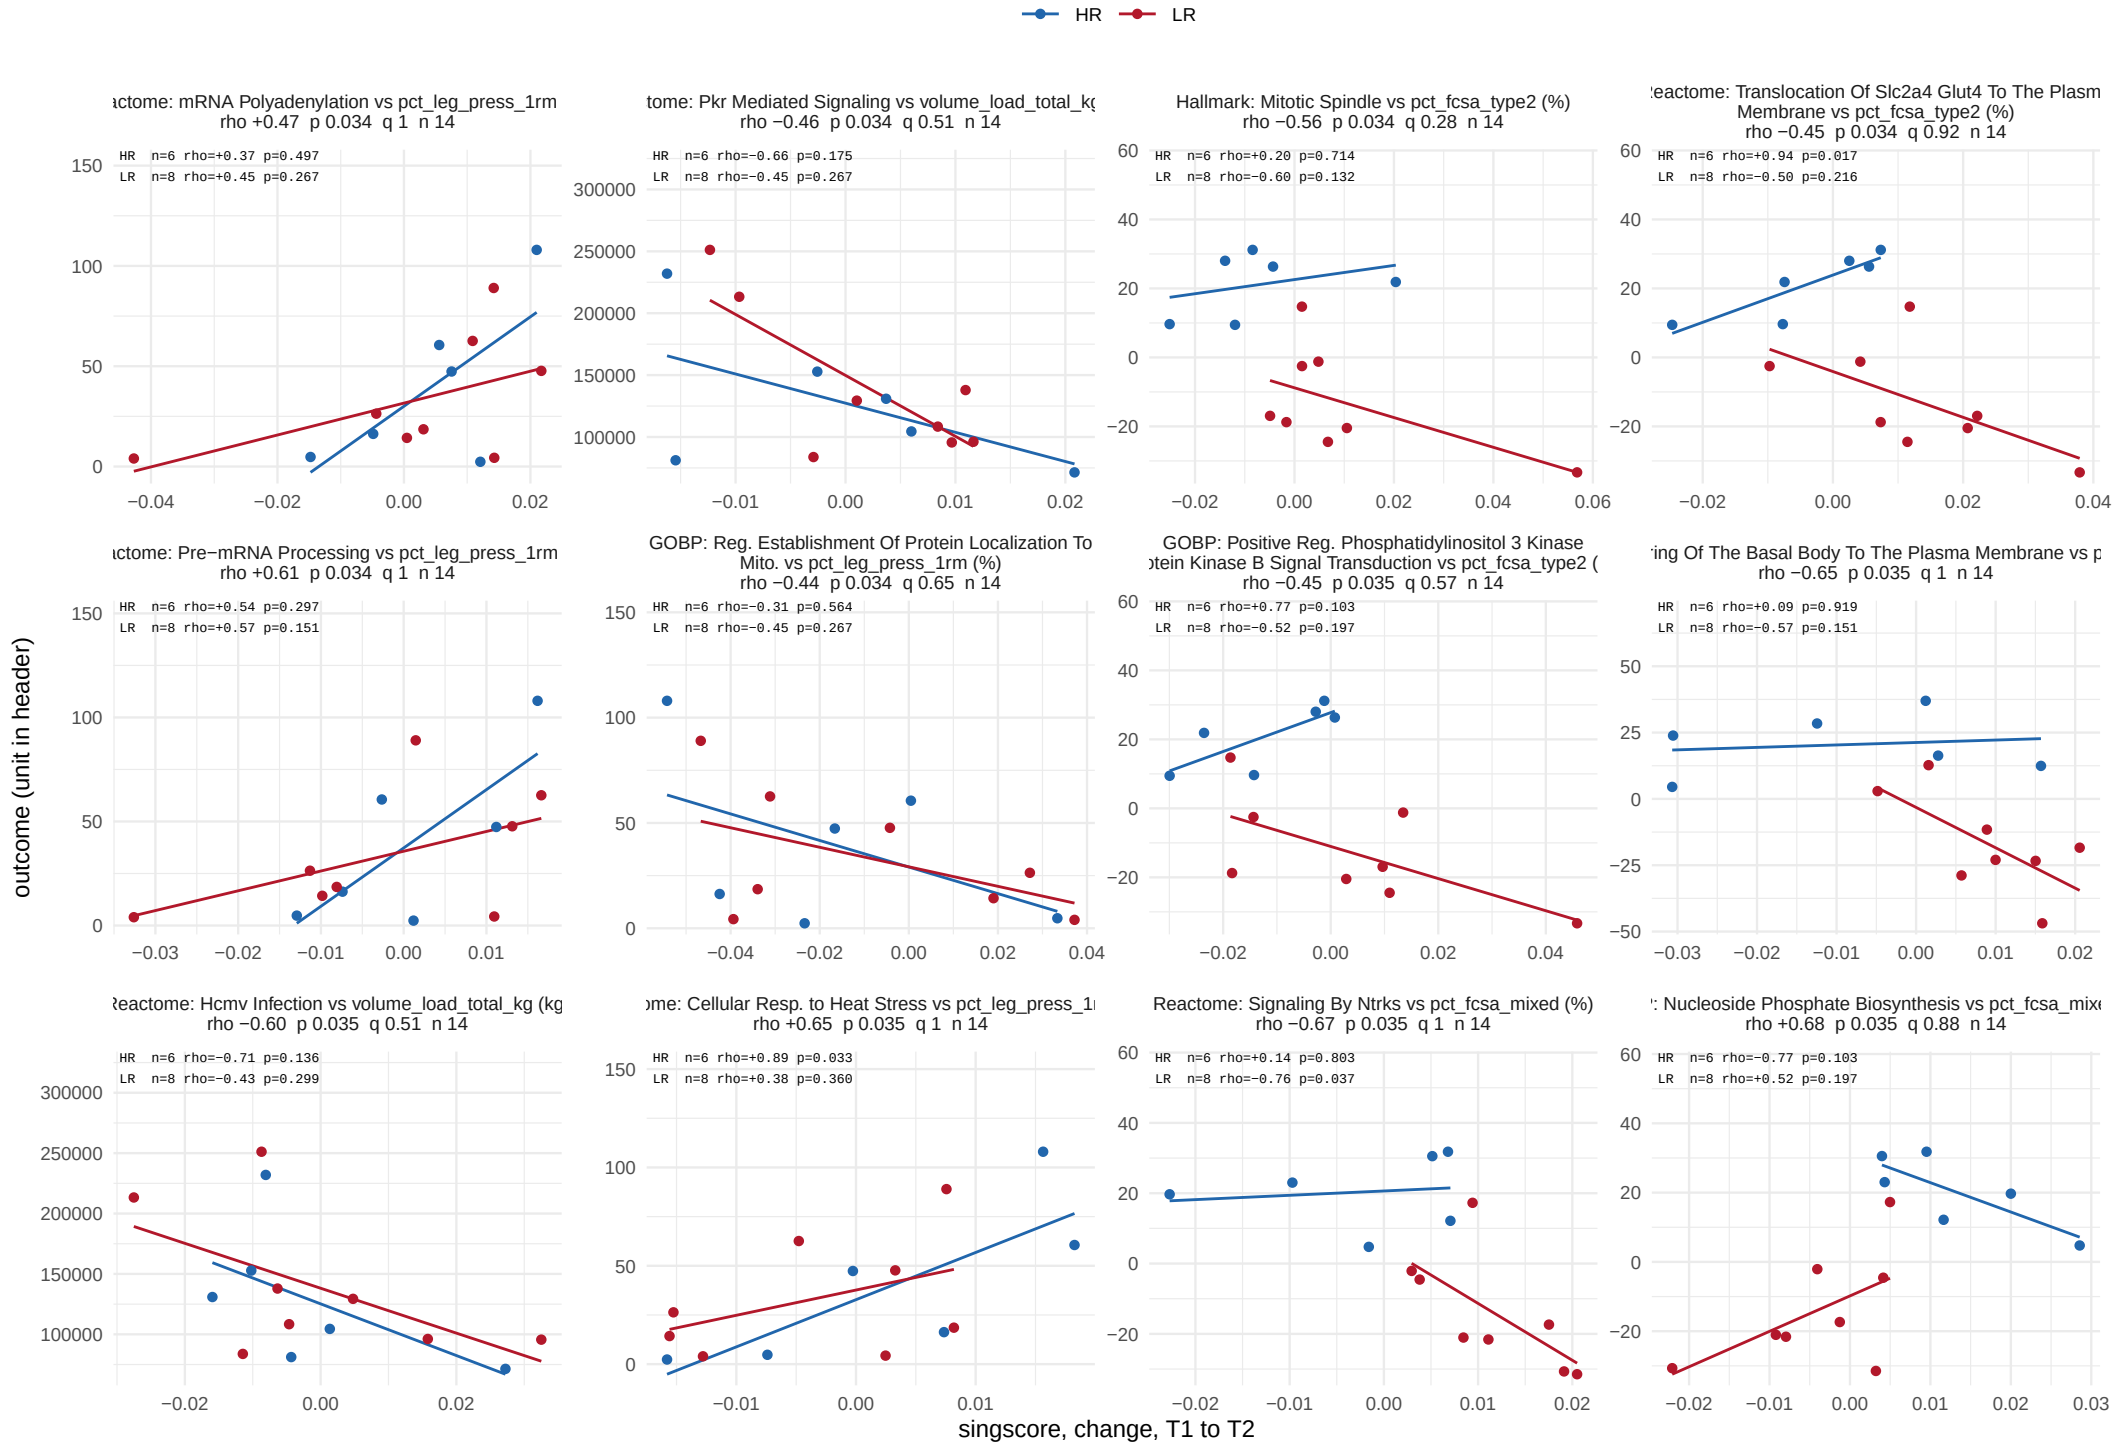

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


415 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 22 of 35.

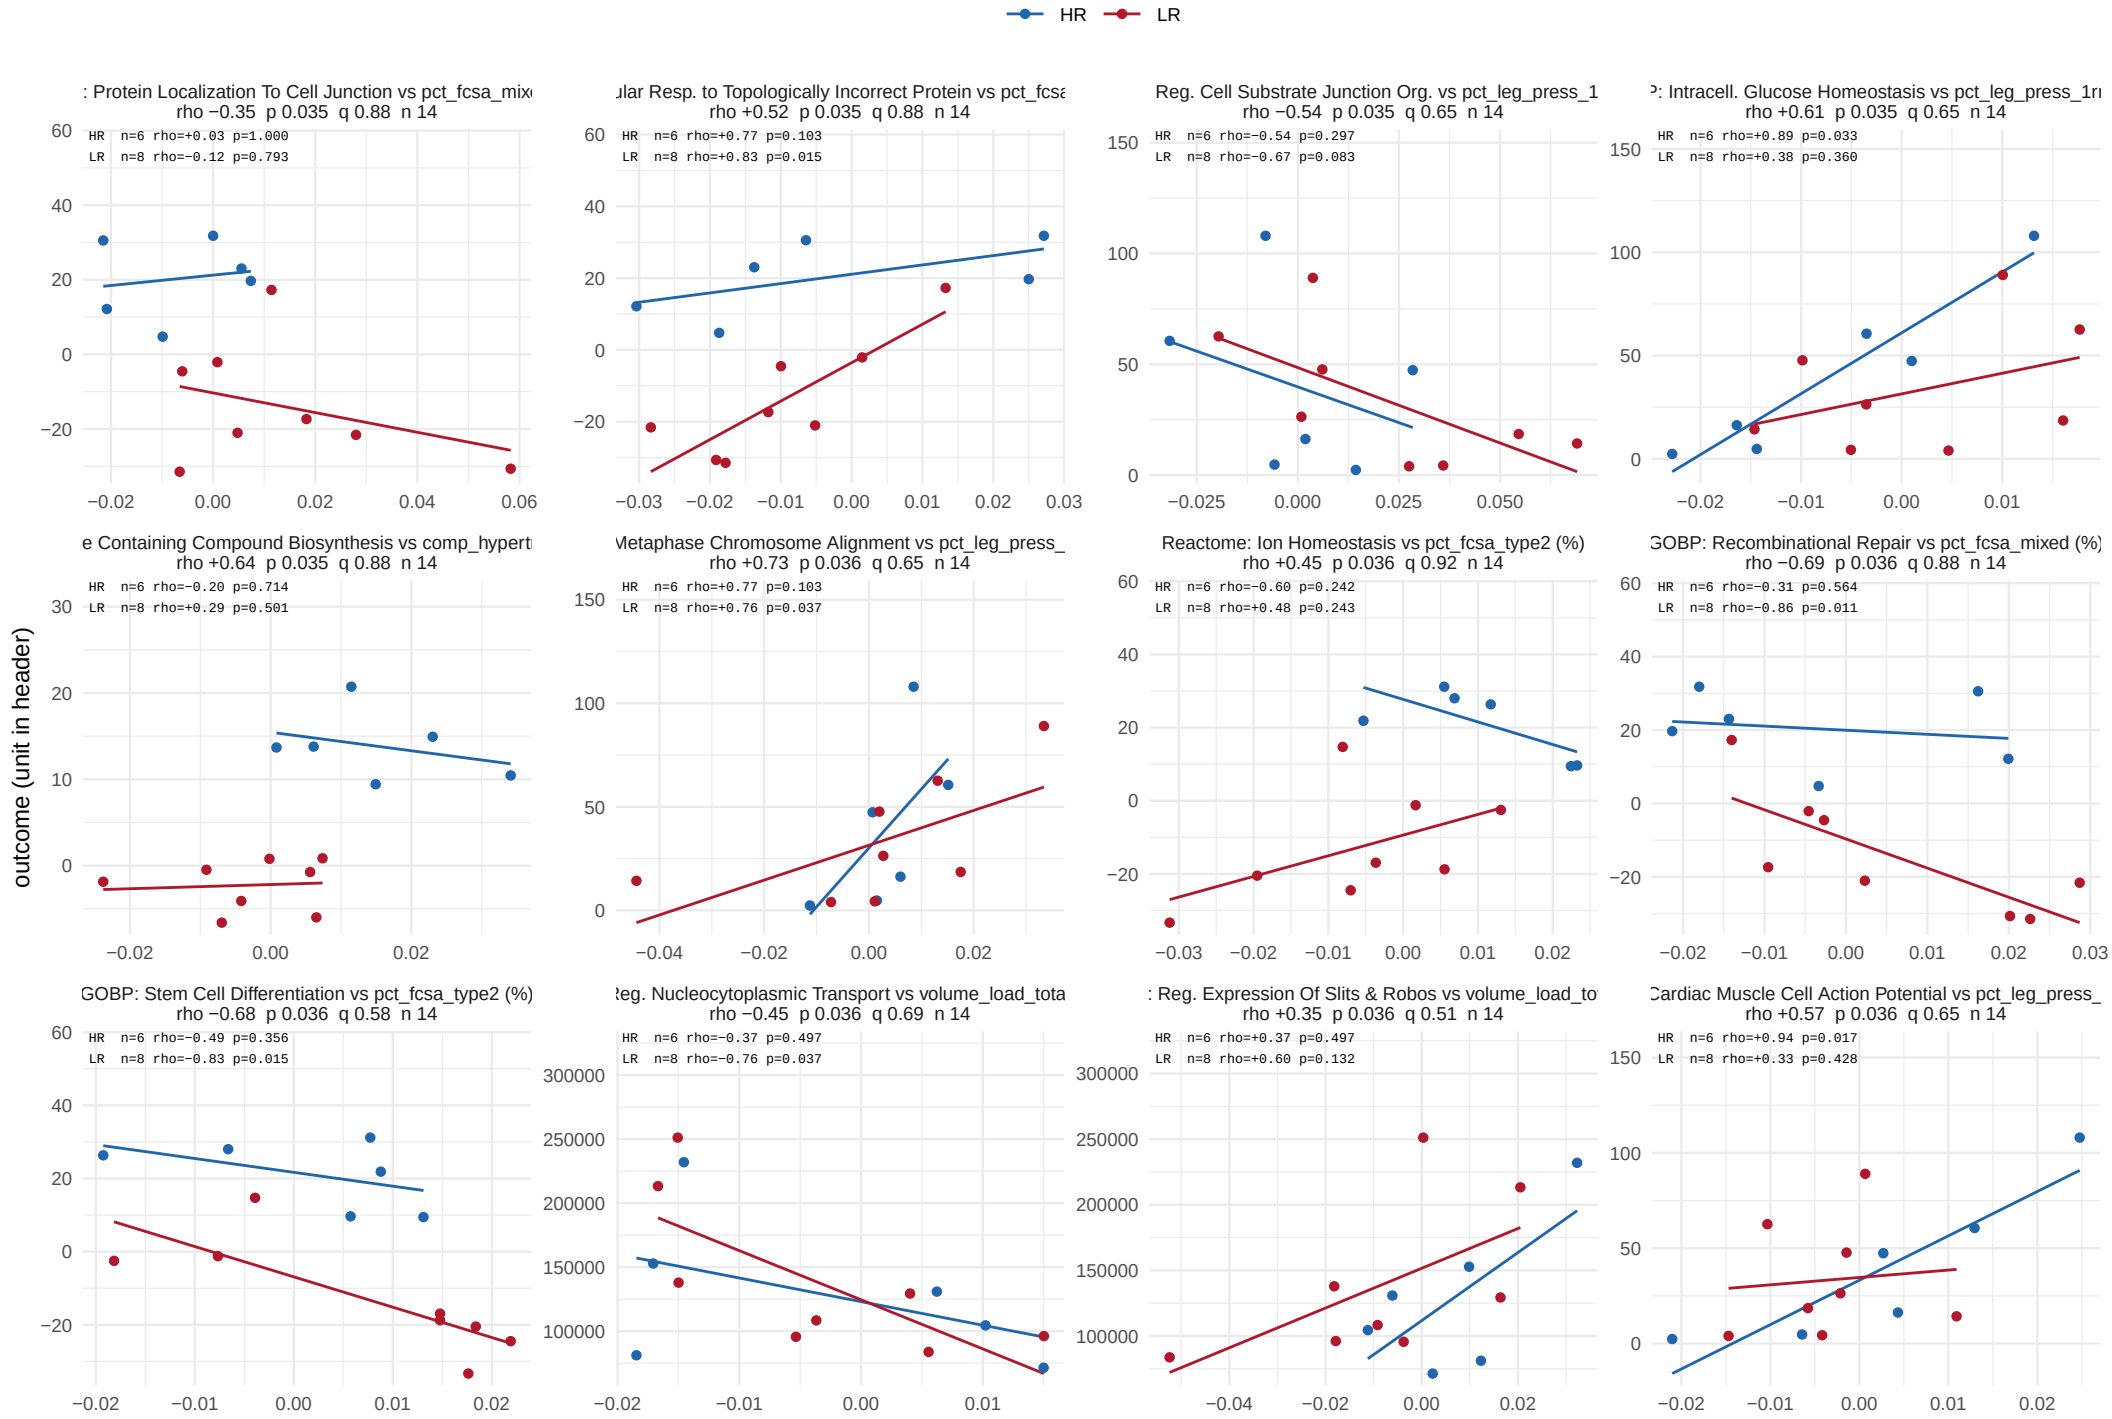

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


415 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 23 of 35.

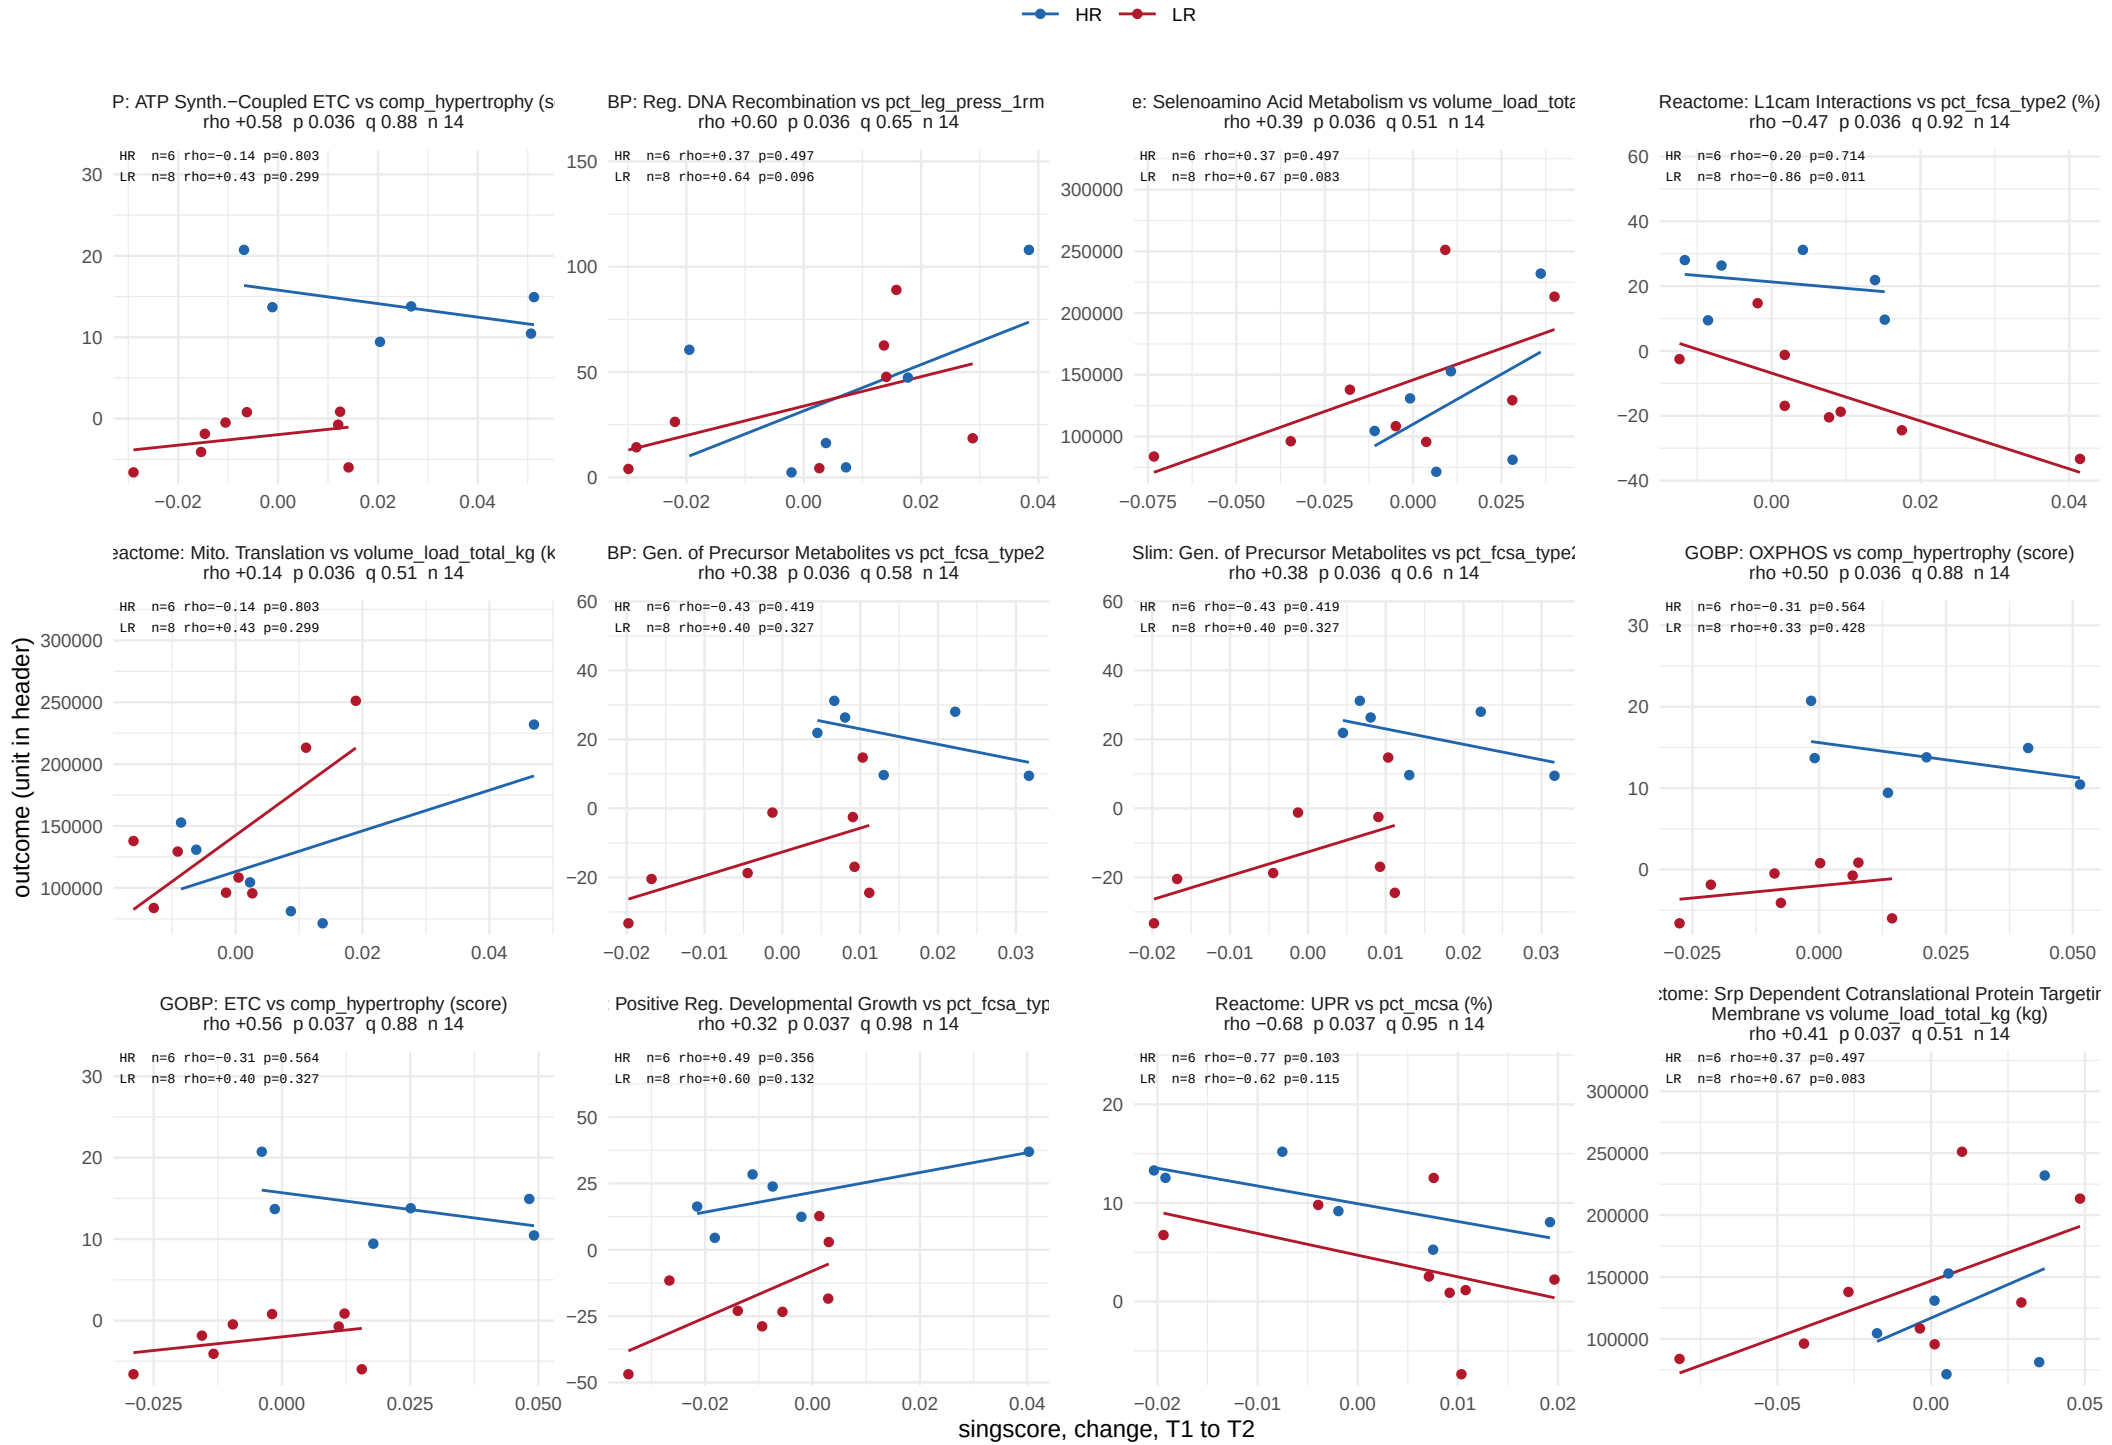

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


415 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 24 of 35.

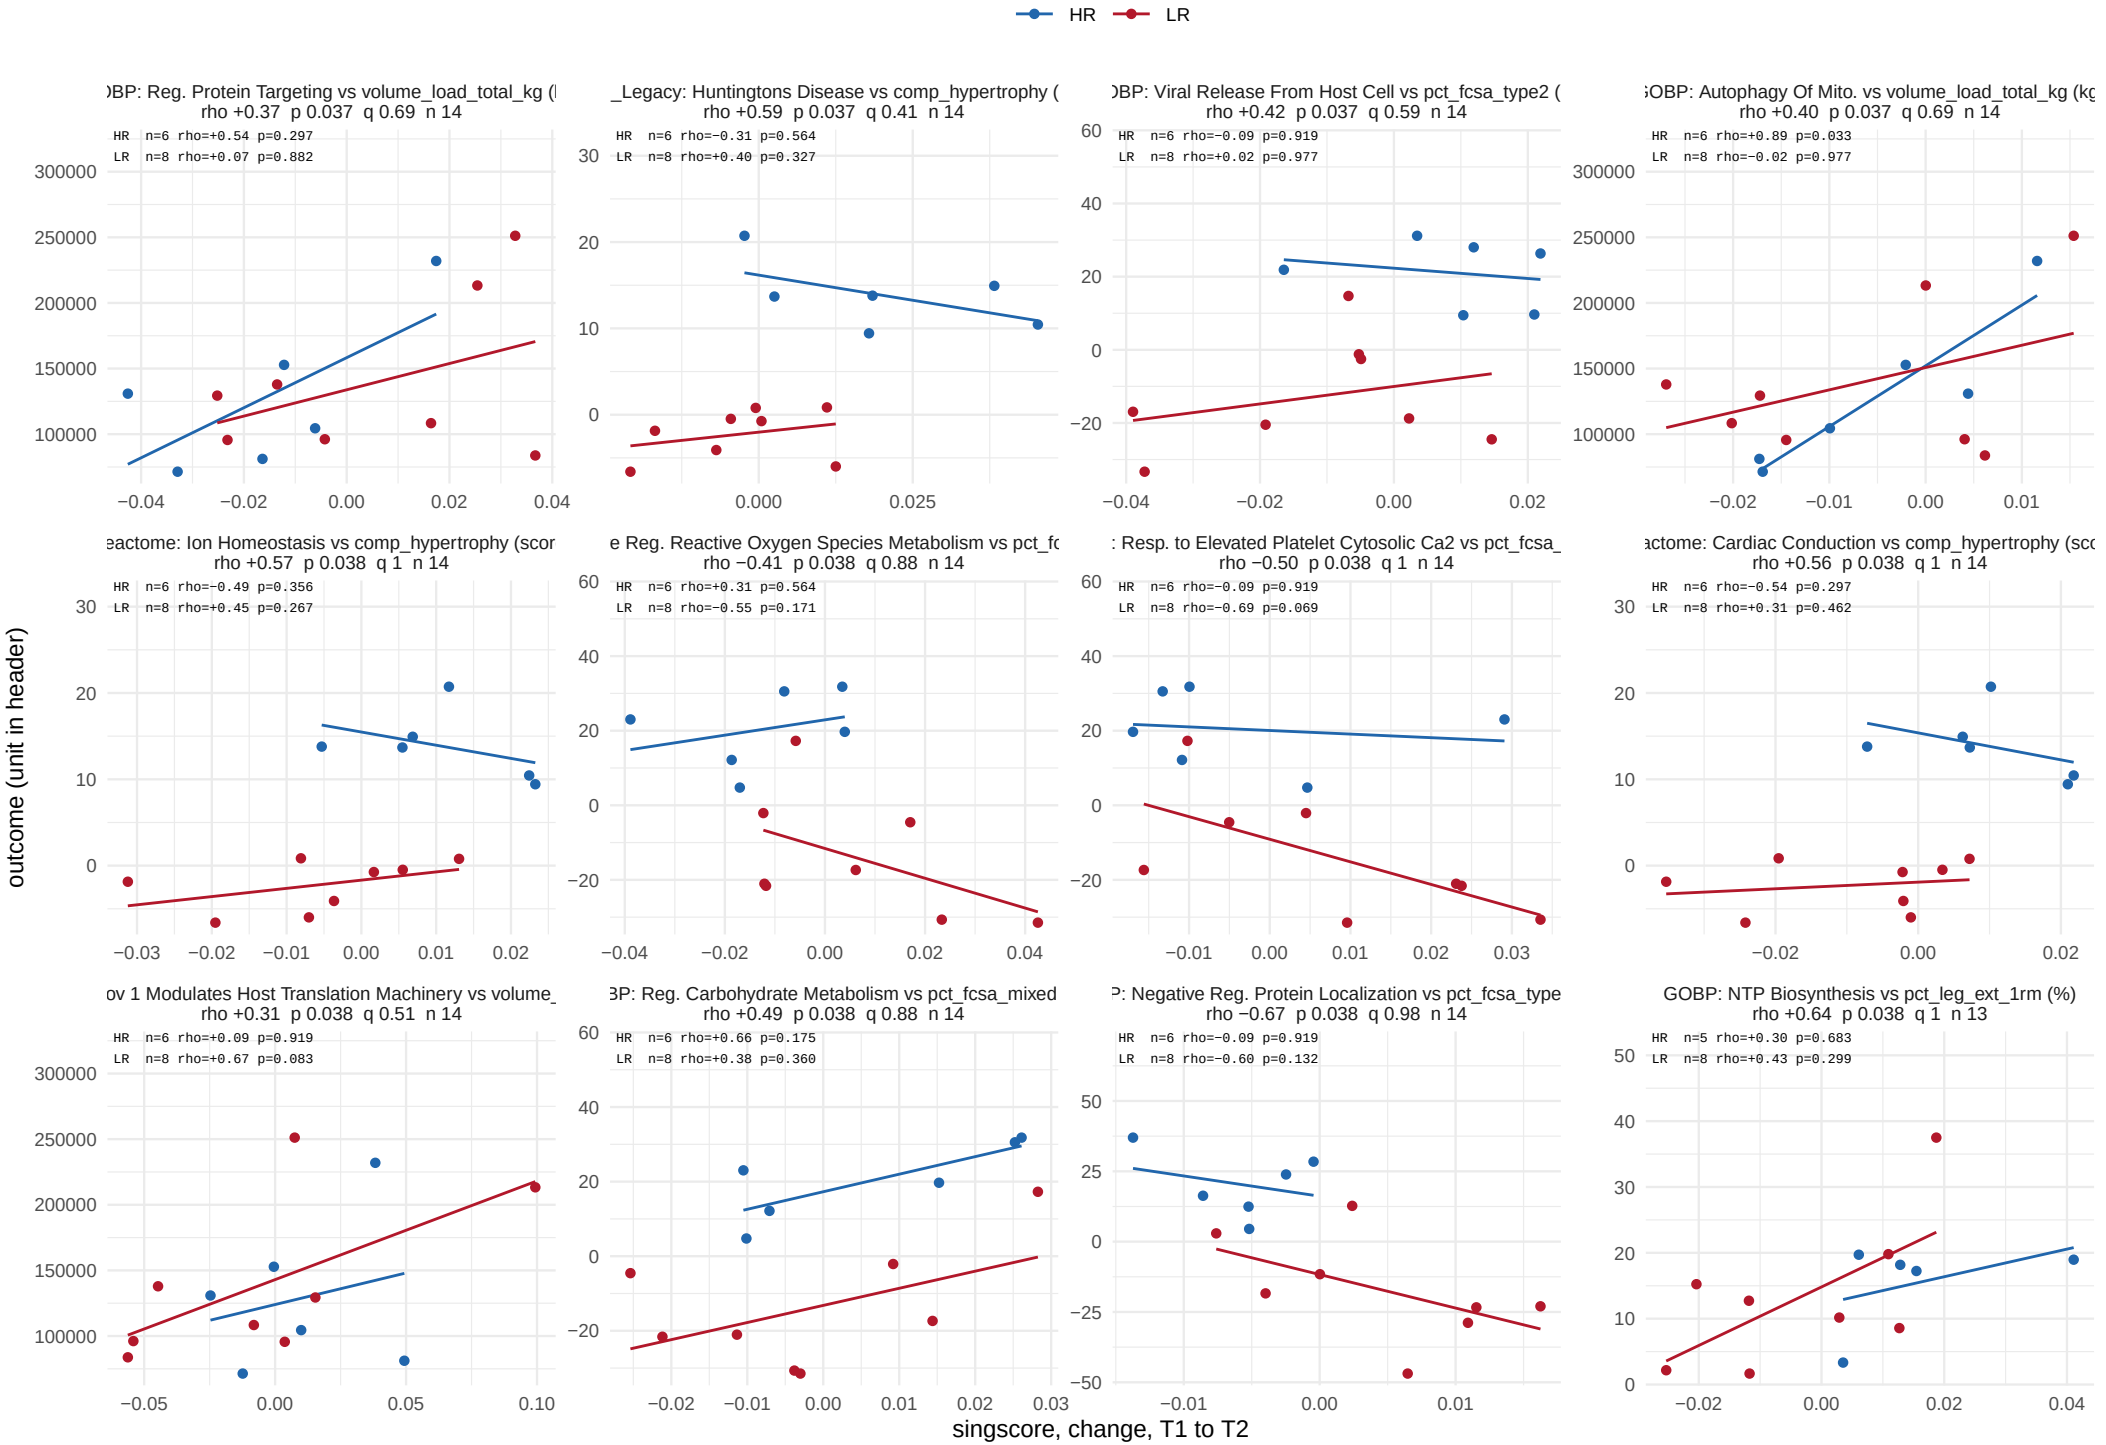

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


415 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 25 of 35.

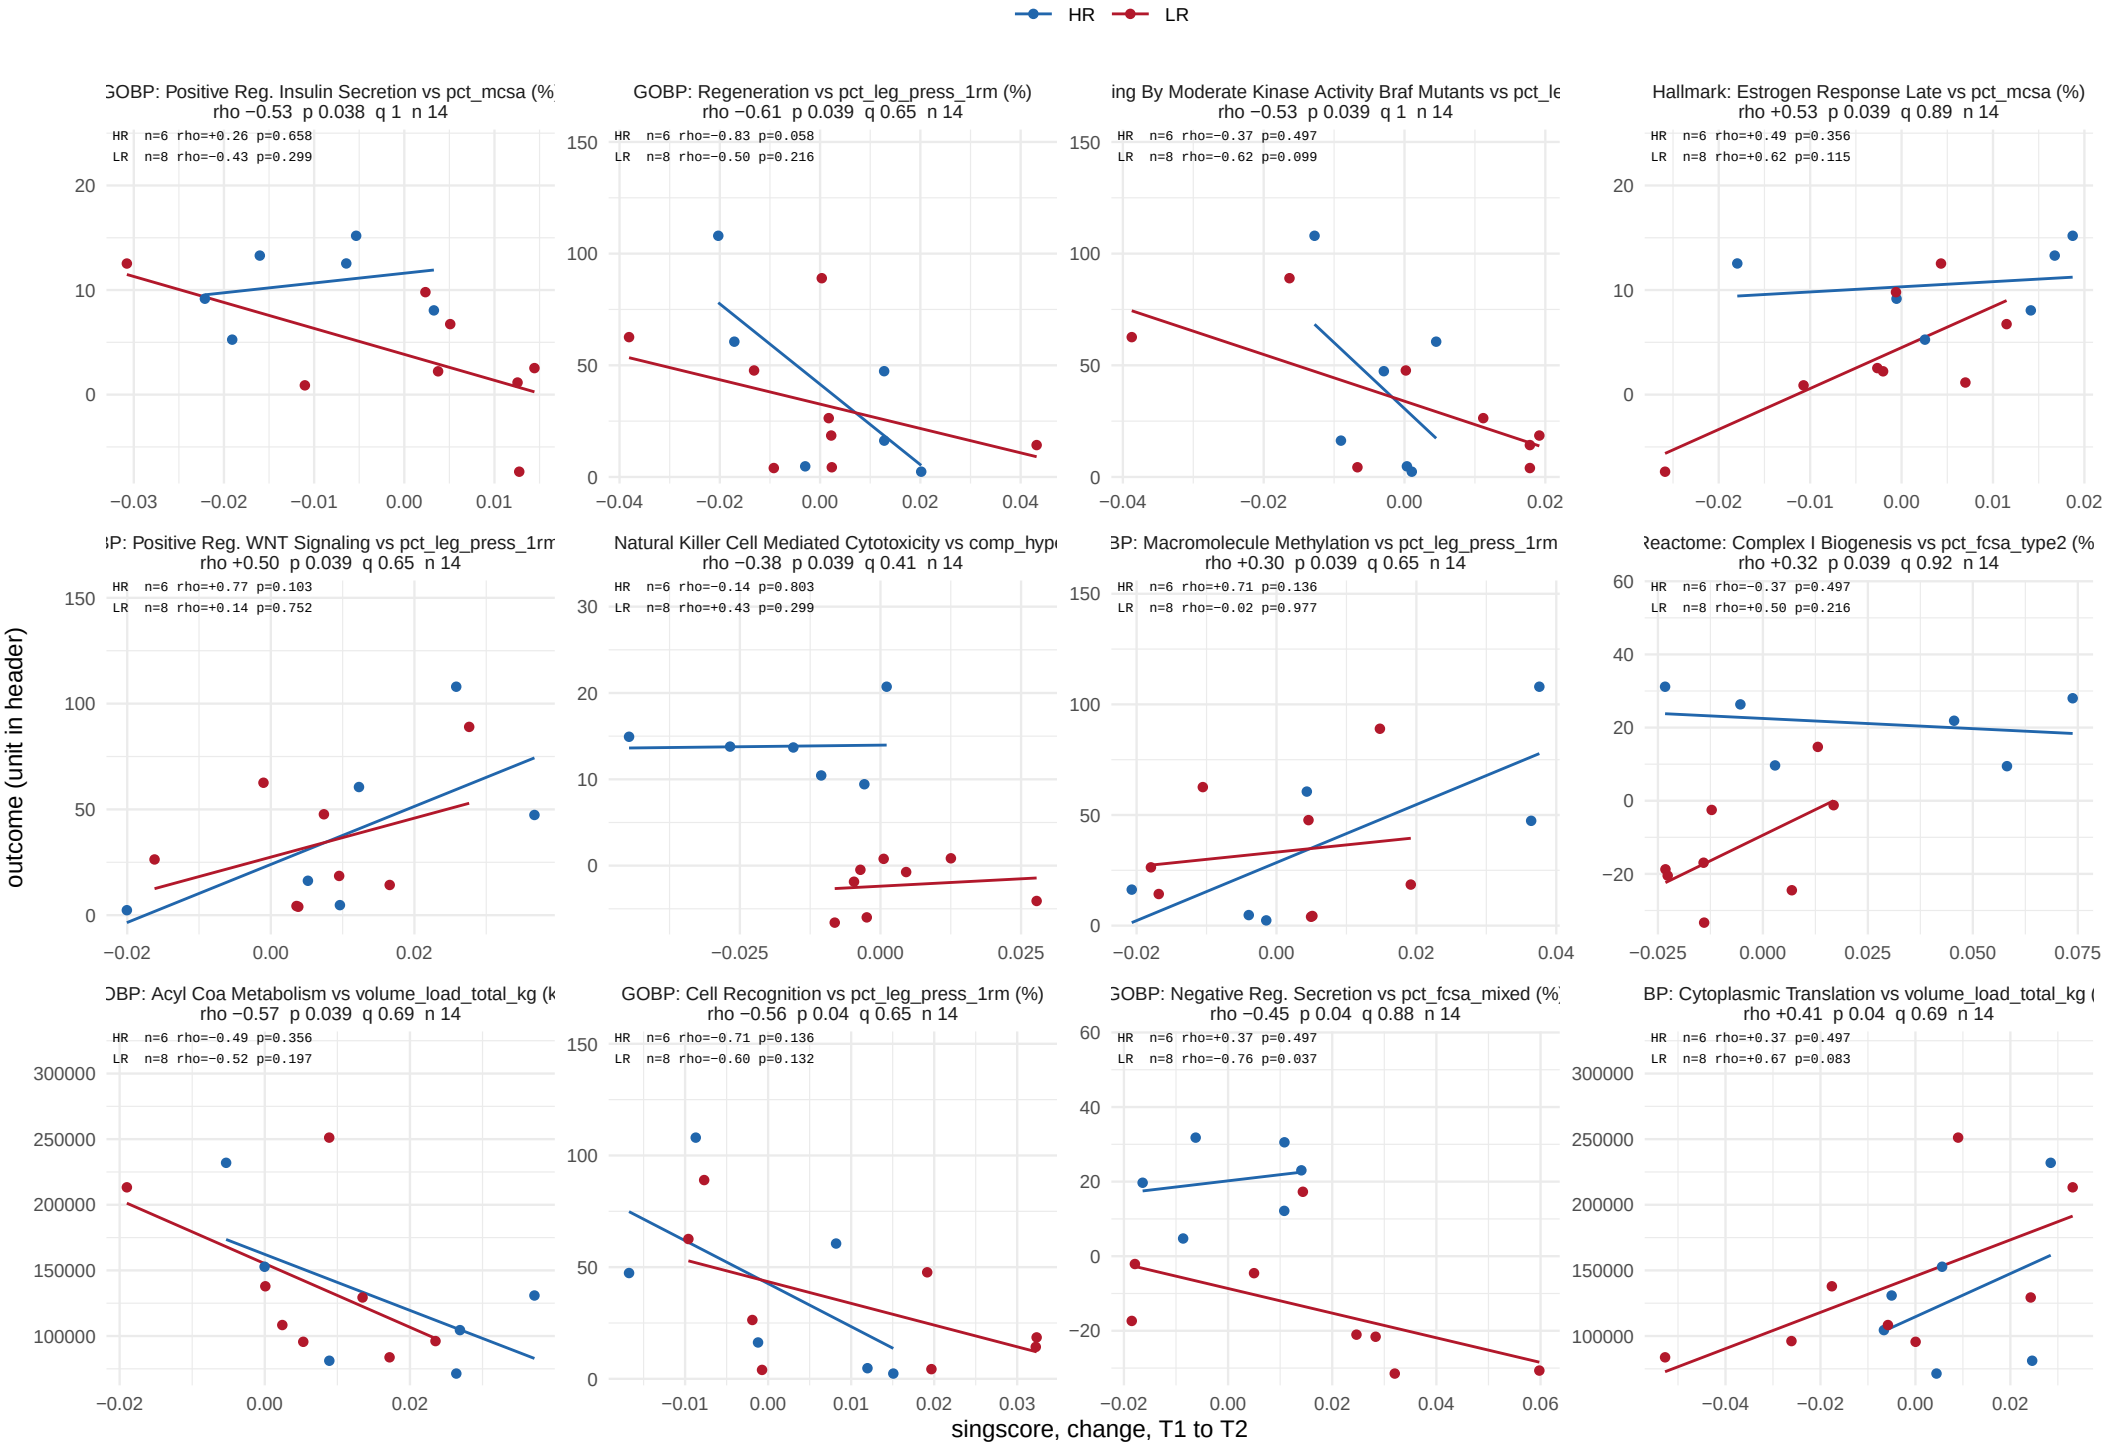

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


415 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 26 of 35.

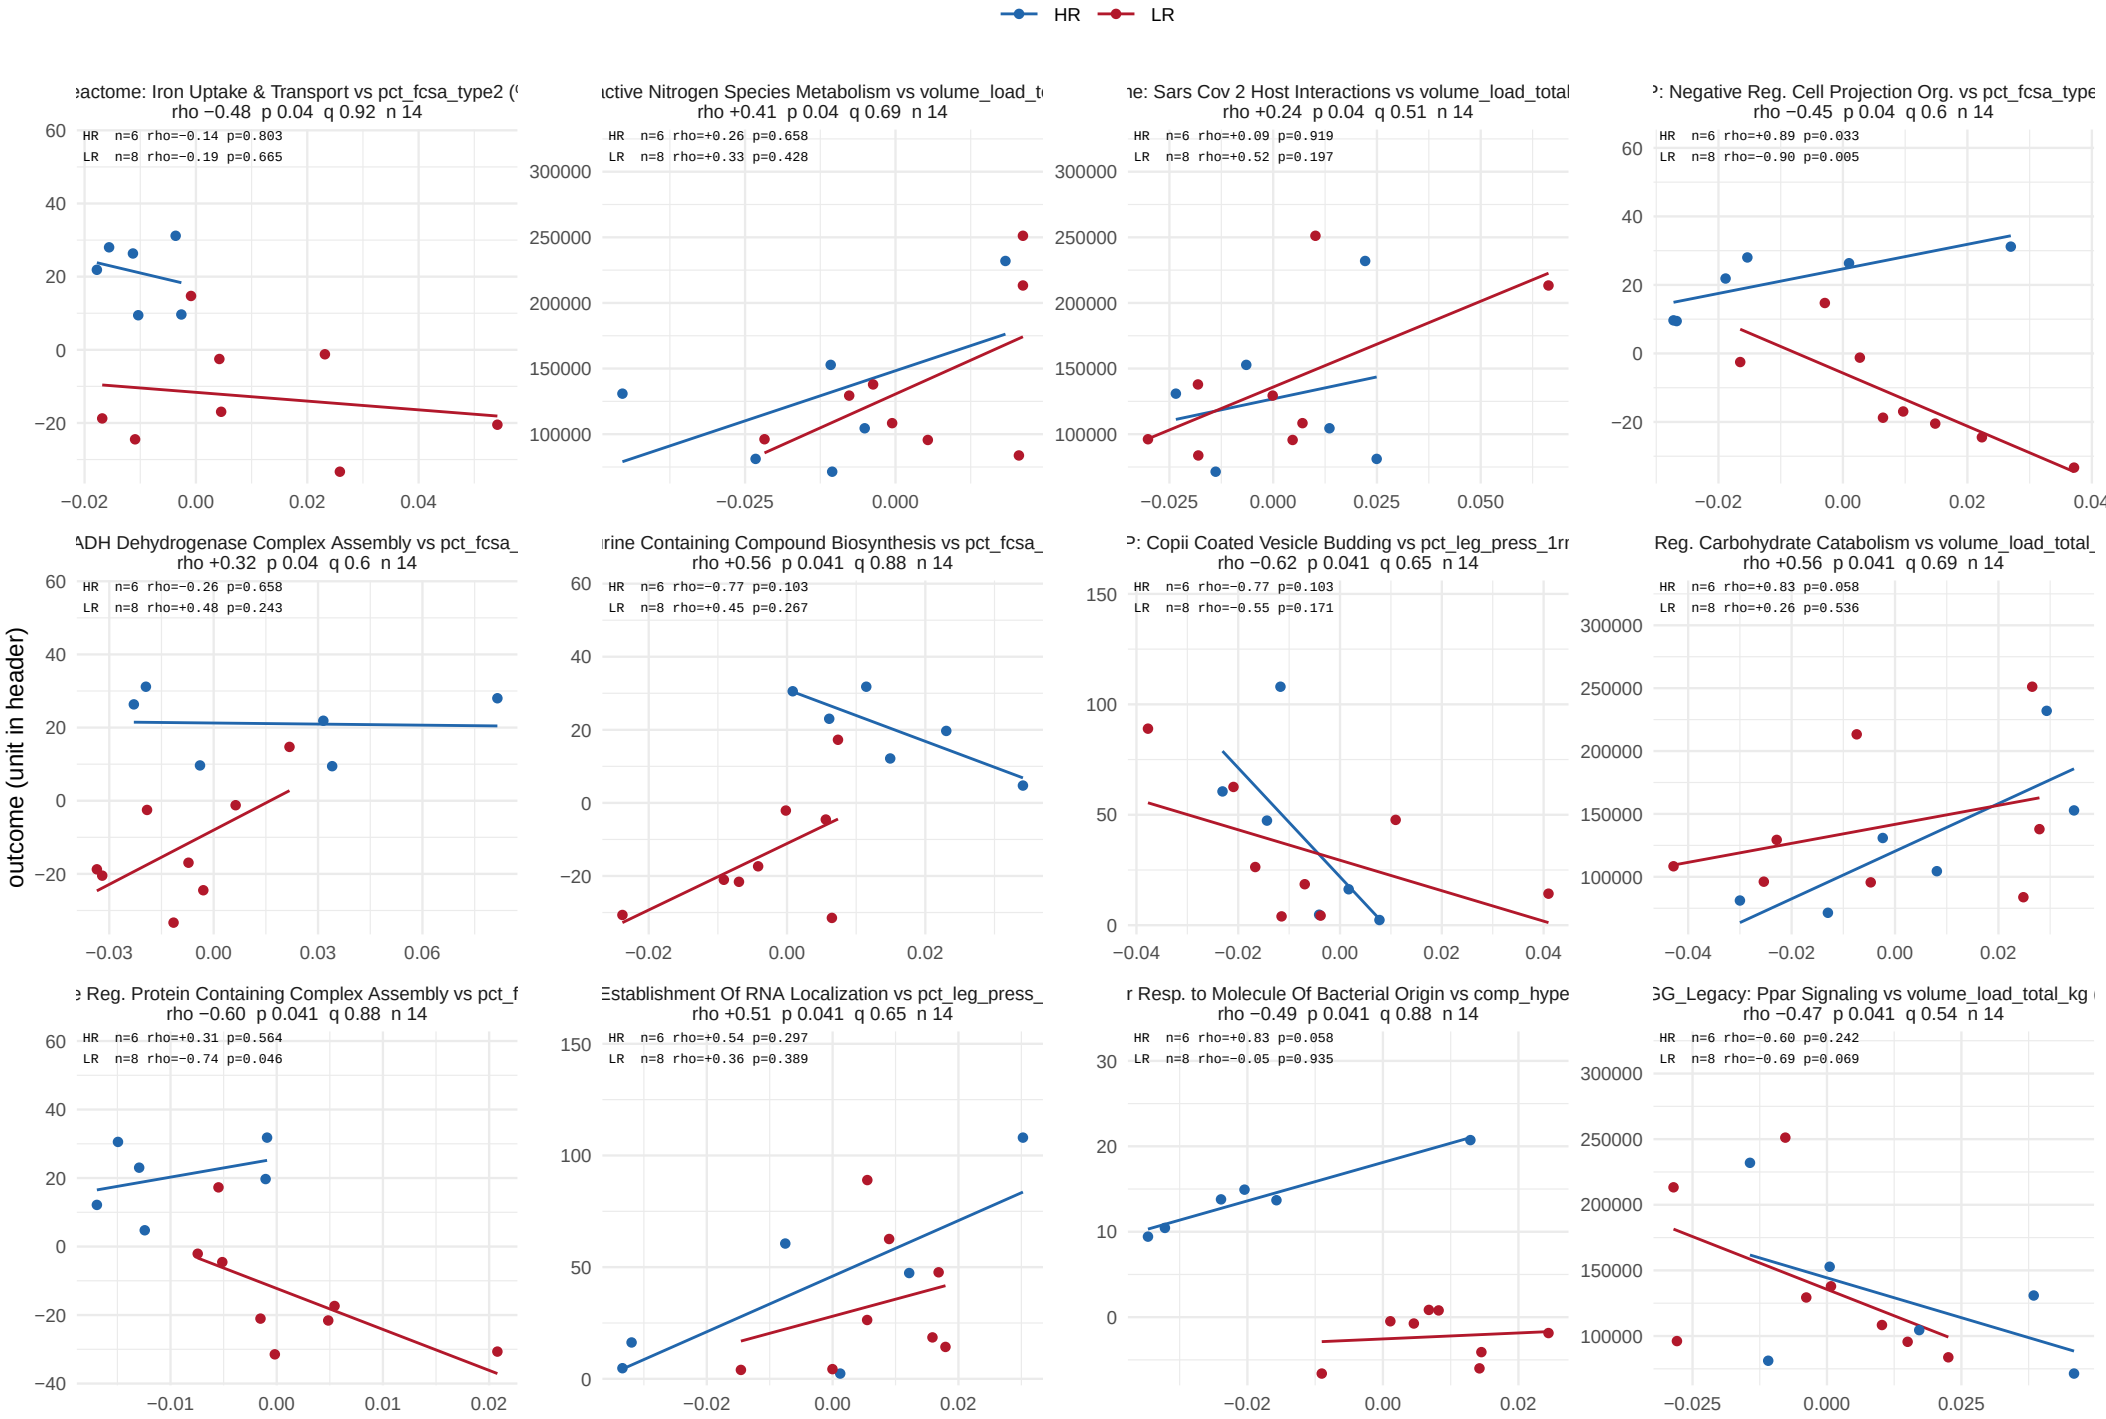

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


415 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 27 of 35.

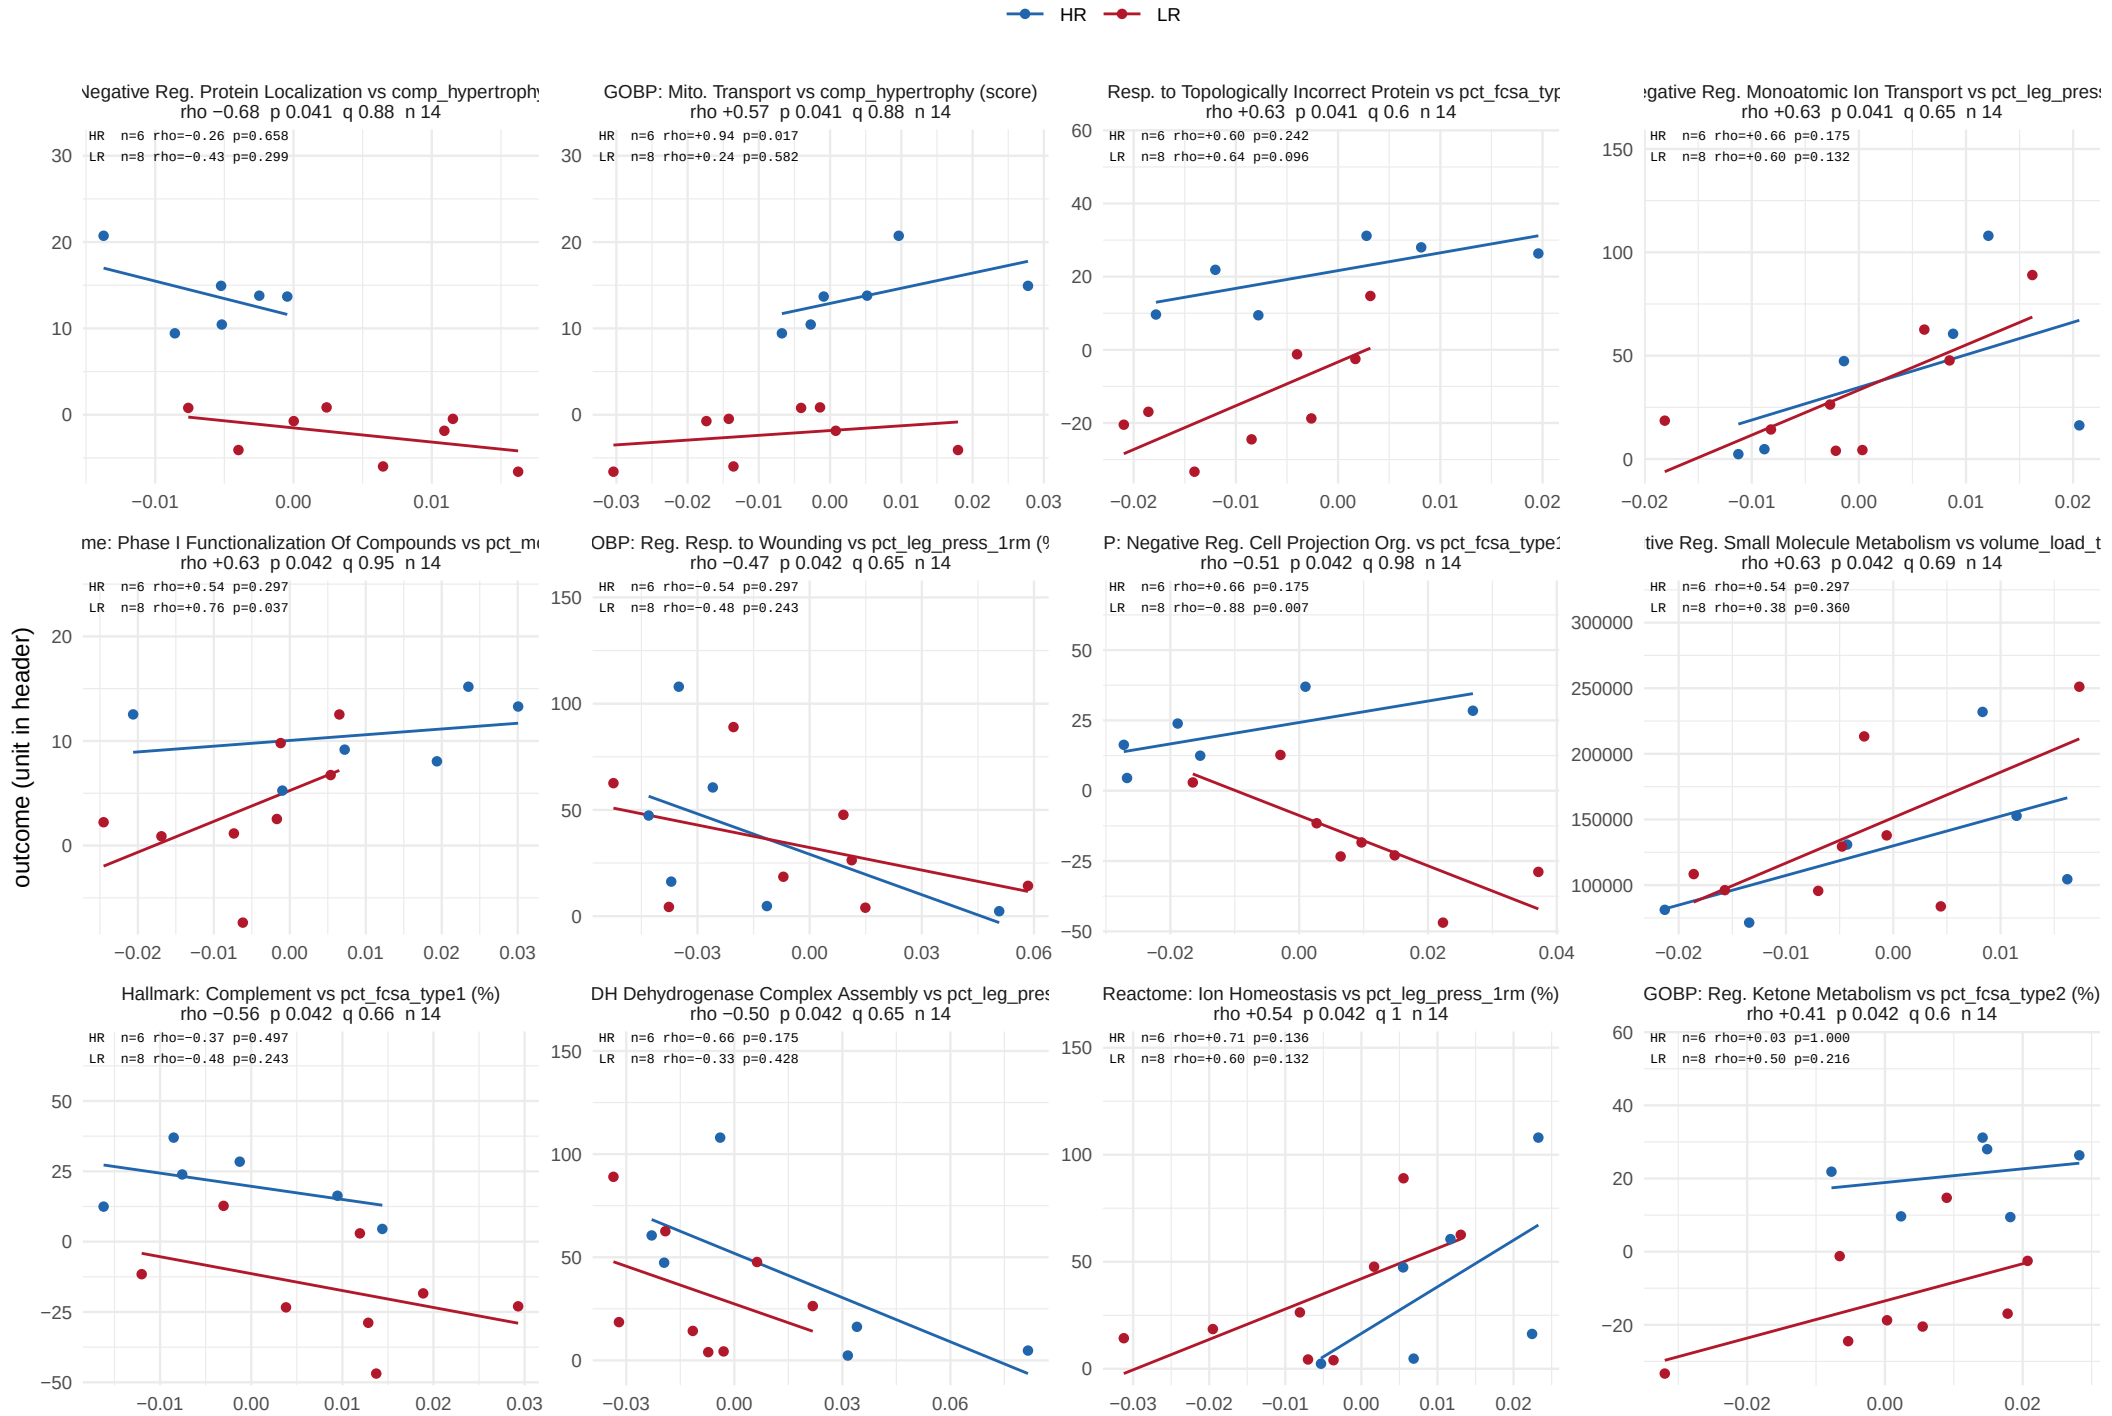

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


415 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 28 of 35.

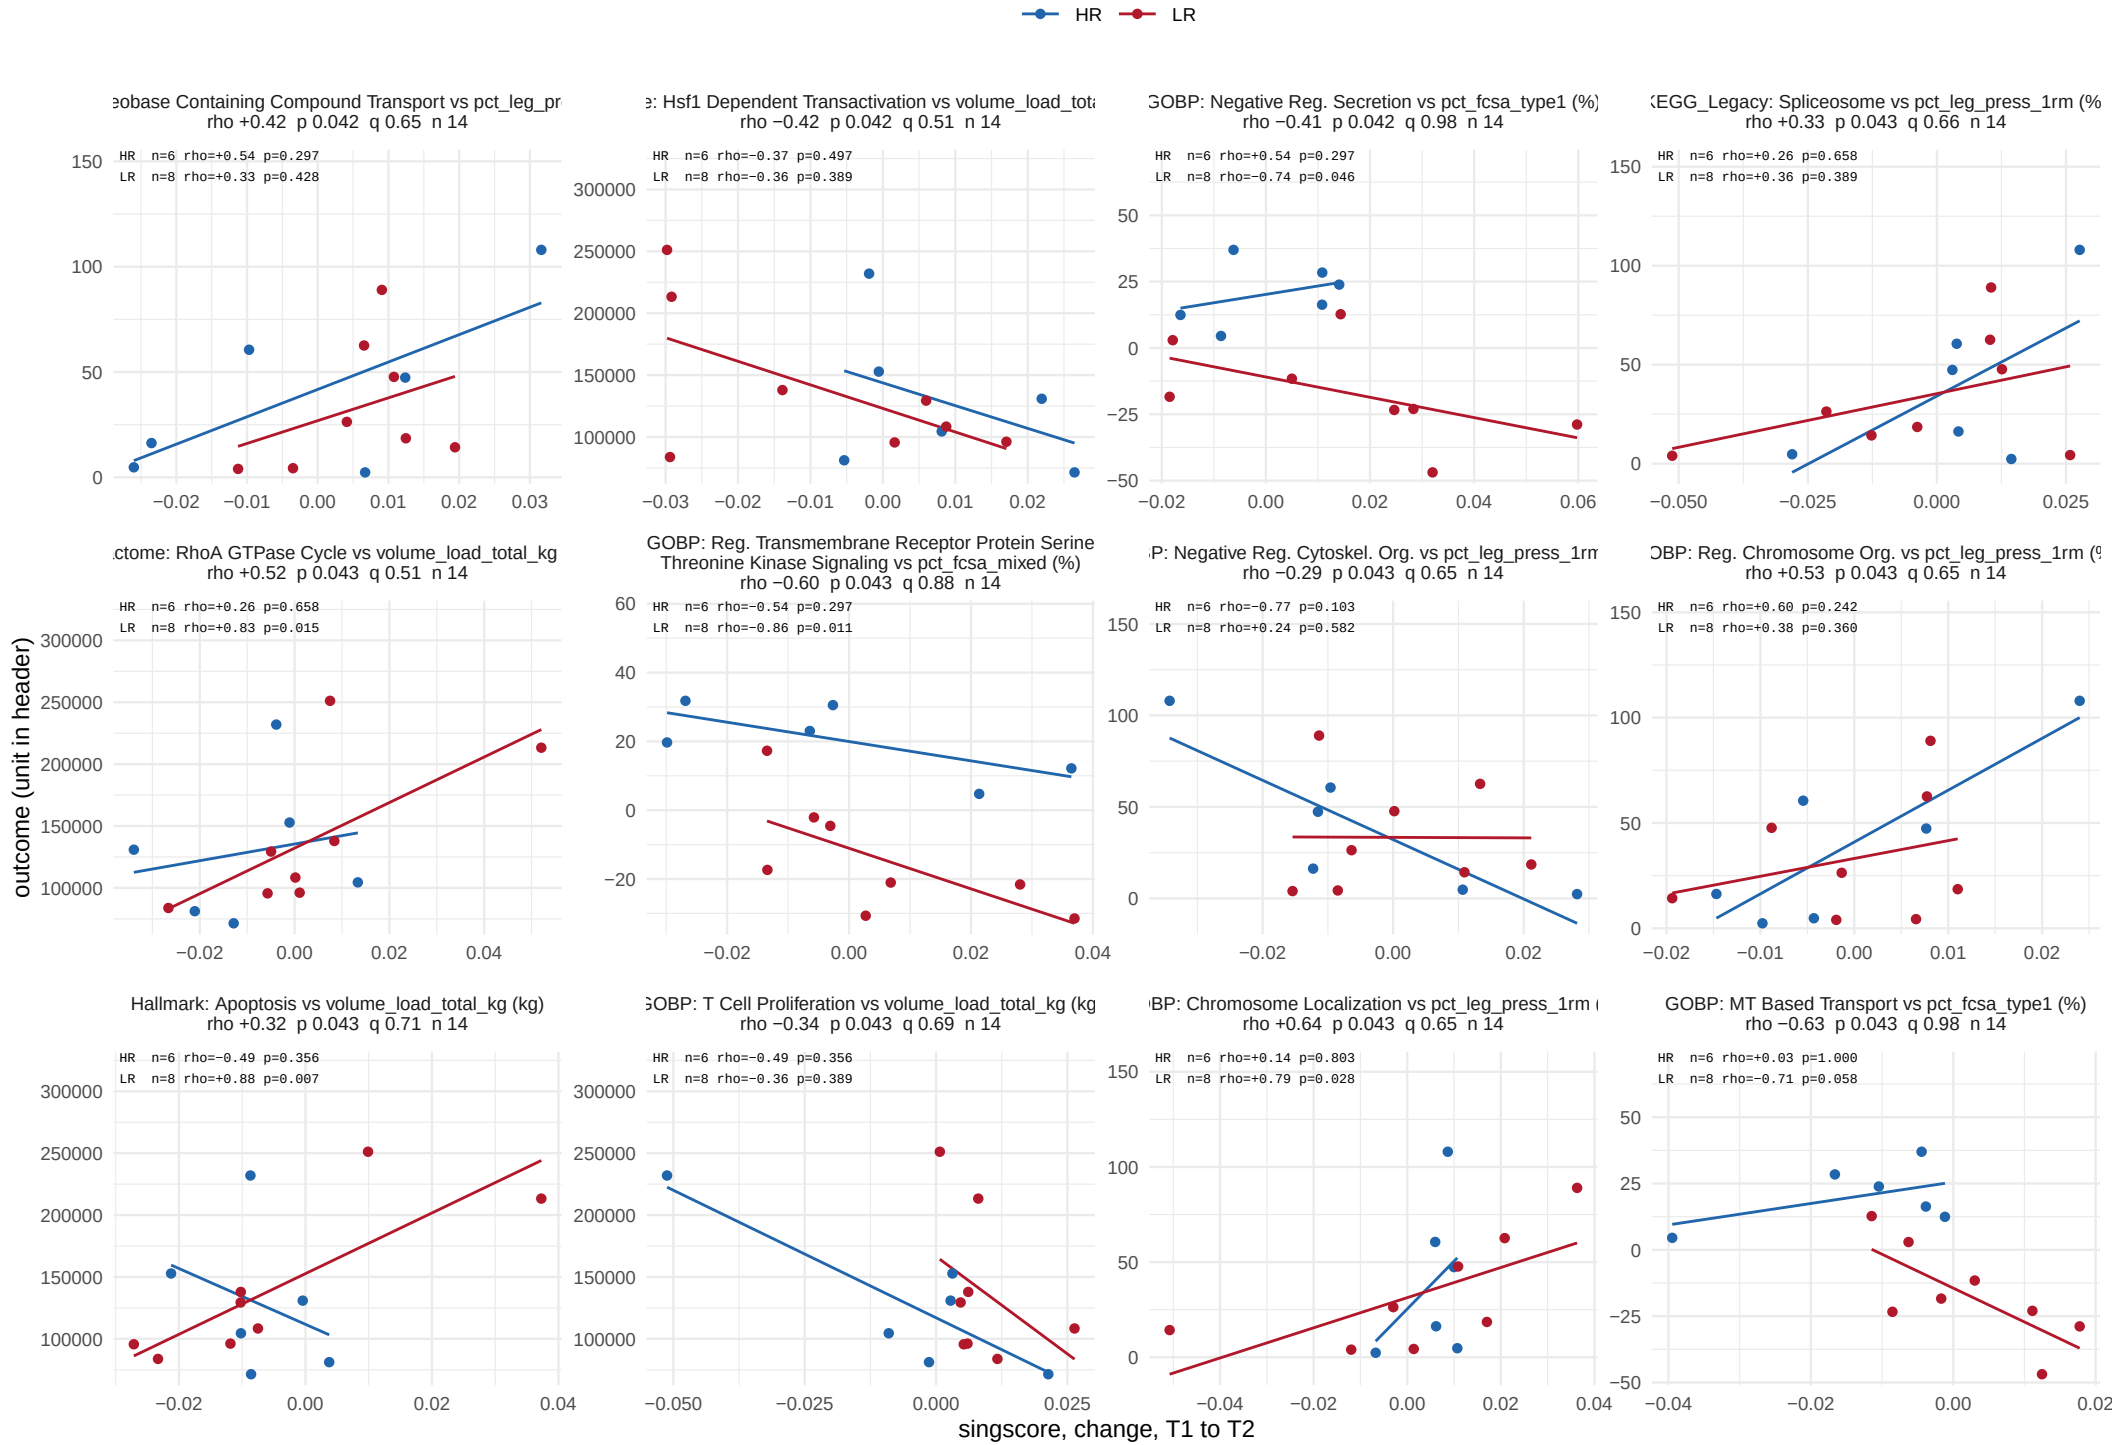

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


415 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 29 of 35.

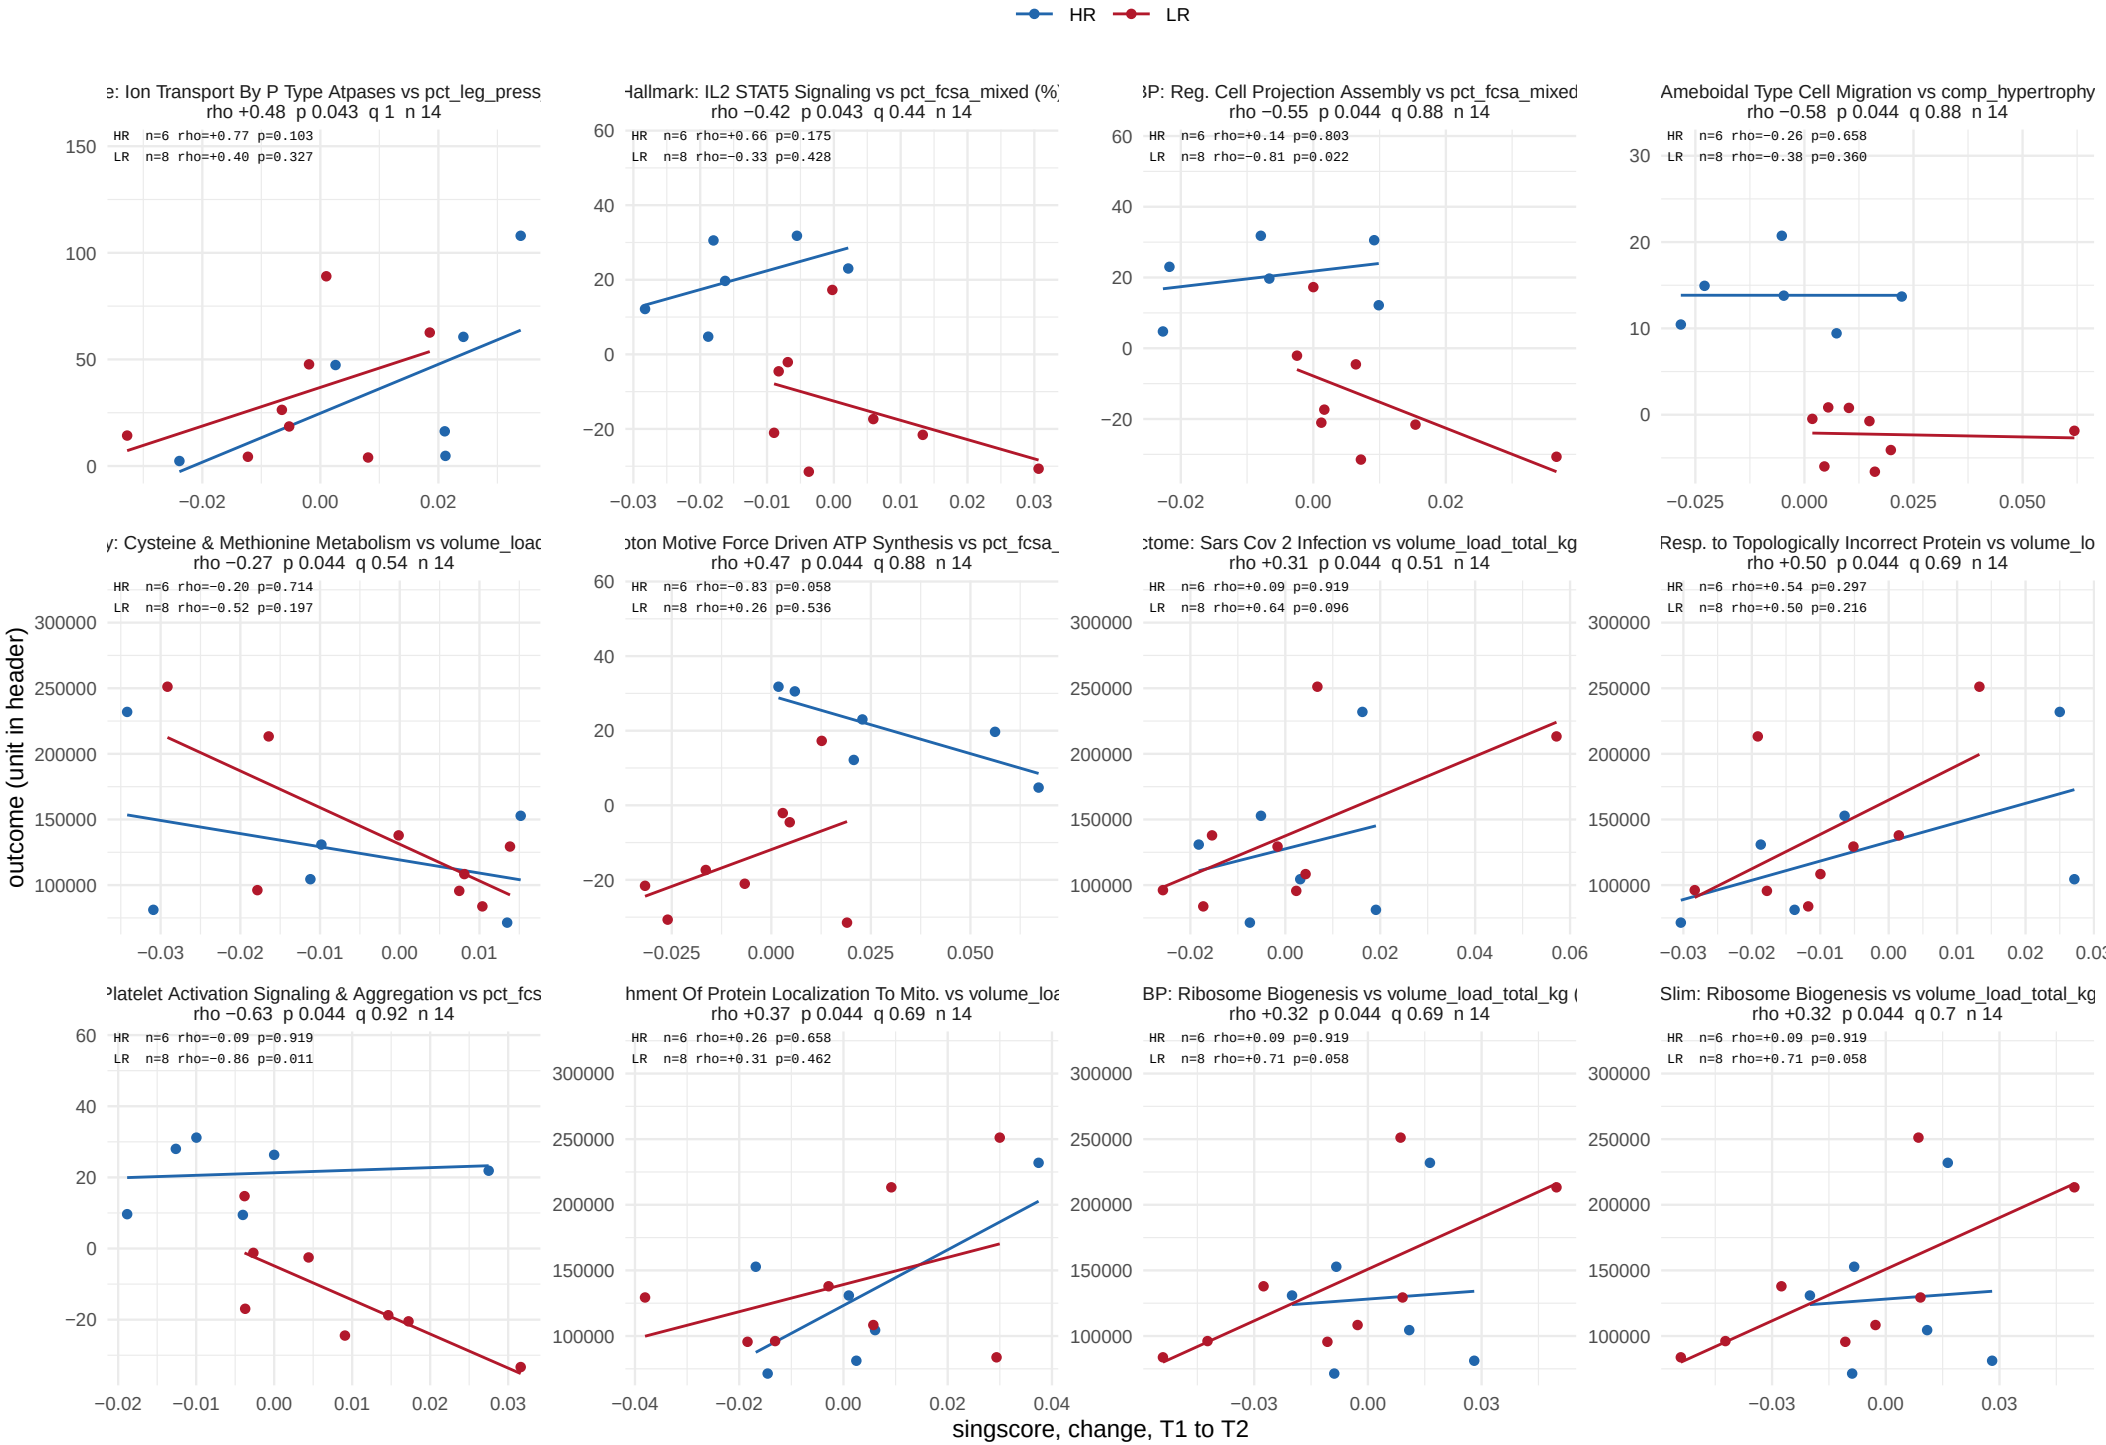

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


415 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 30 of 35.

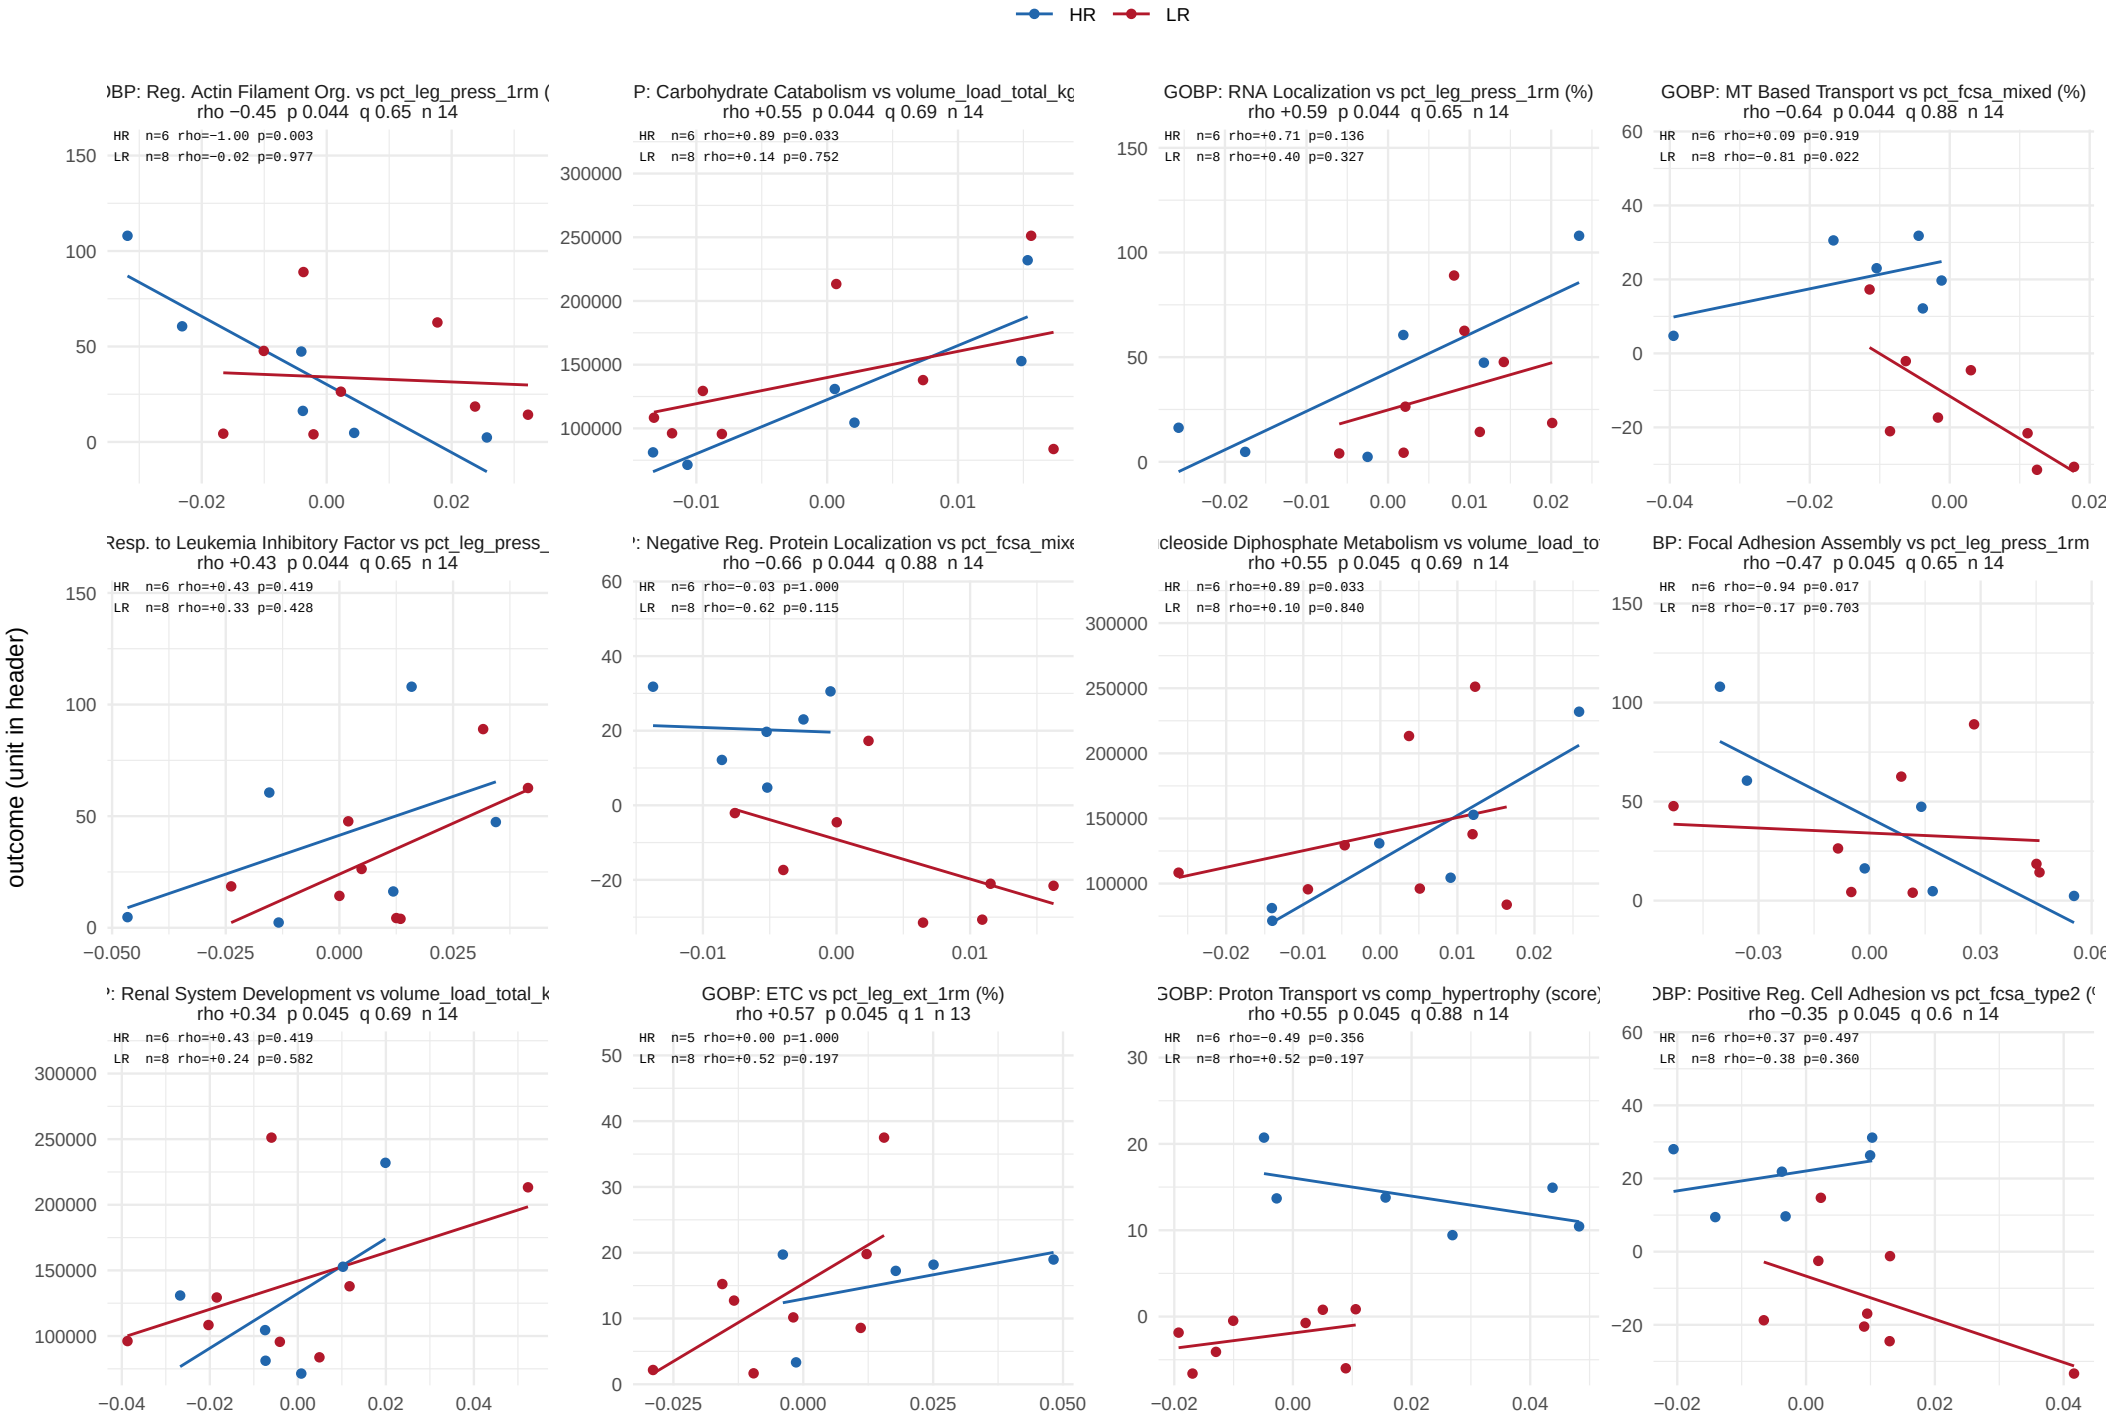

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


415 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 31 of 35.

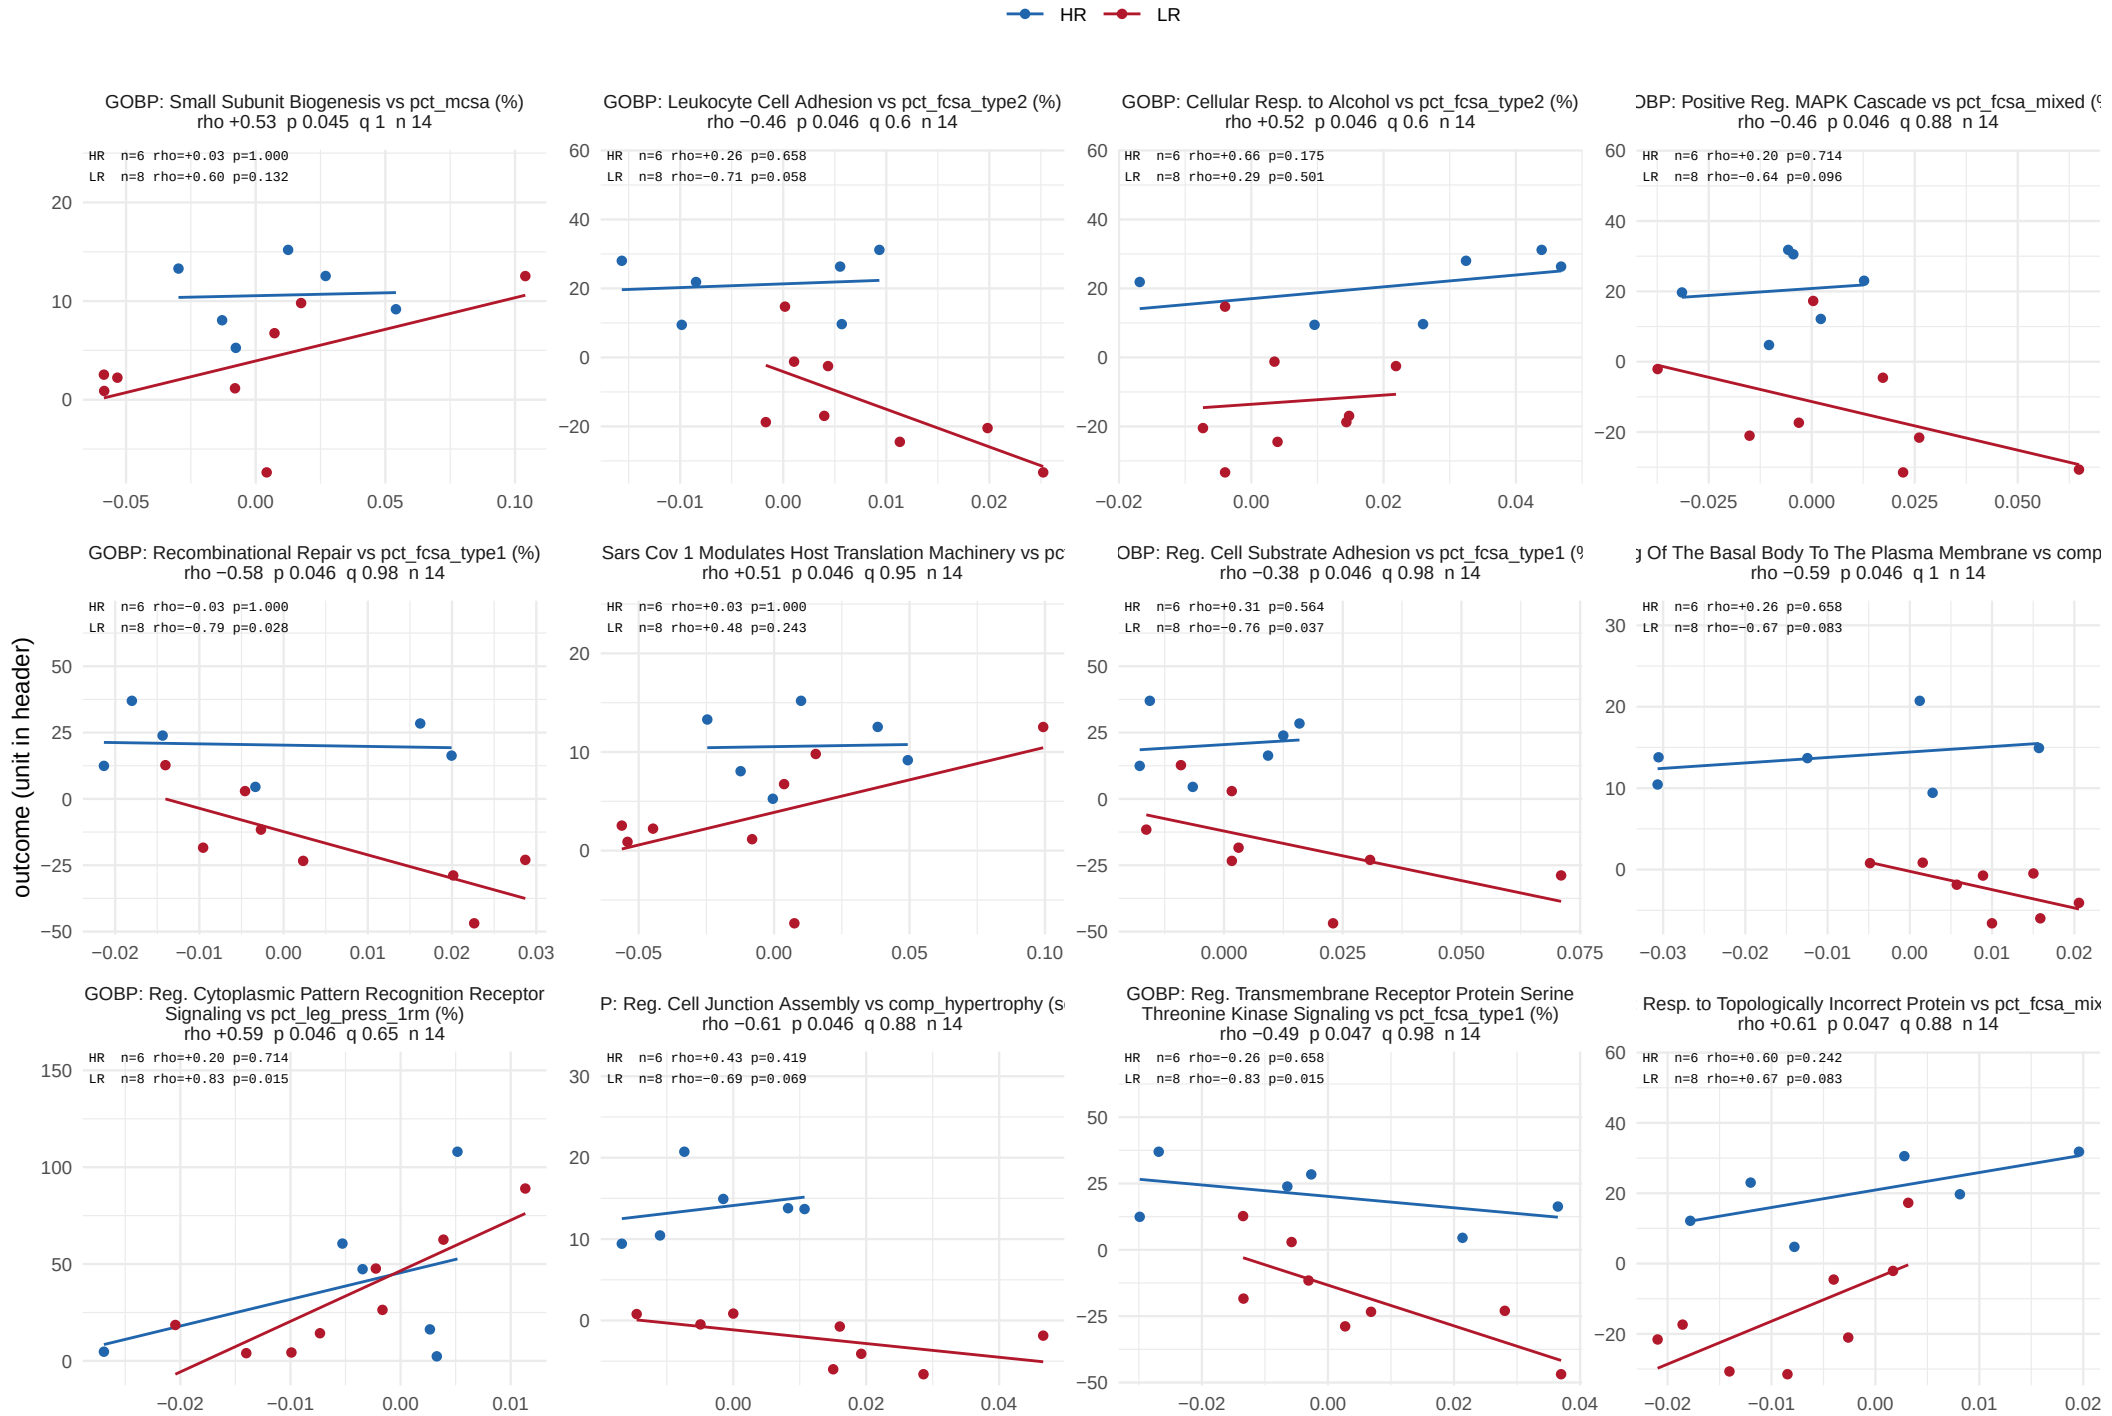

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


415 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 32 of 35.

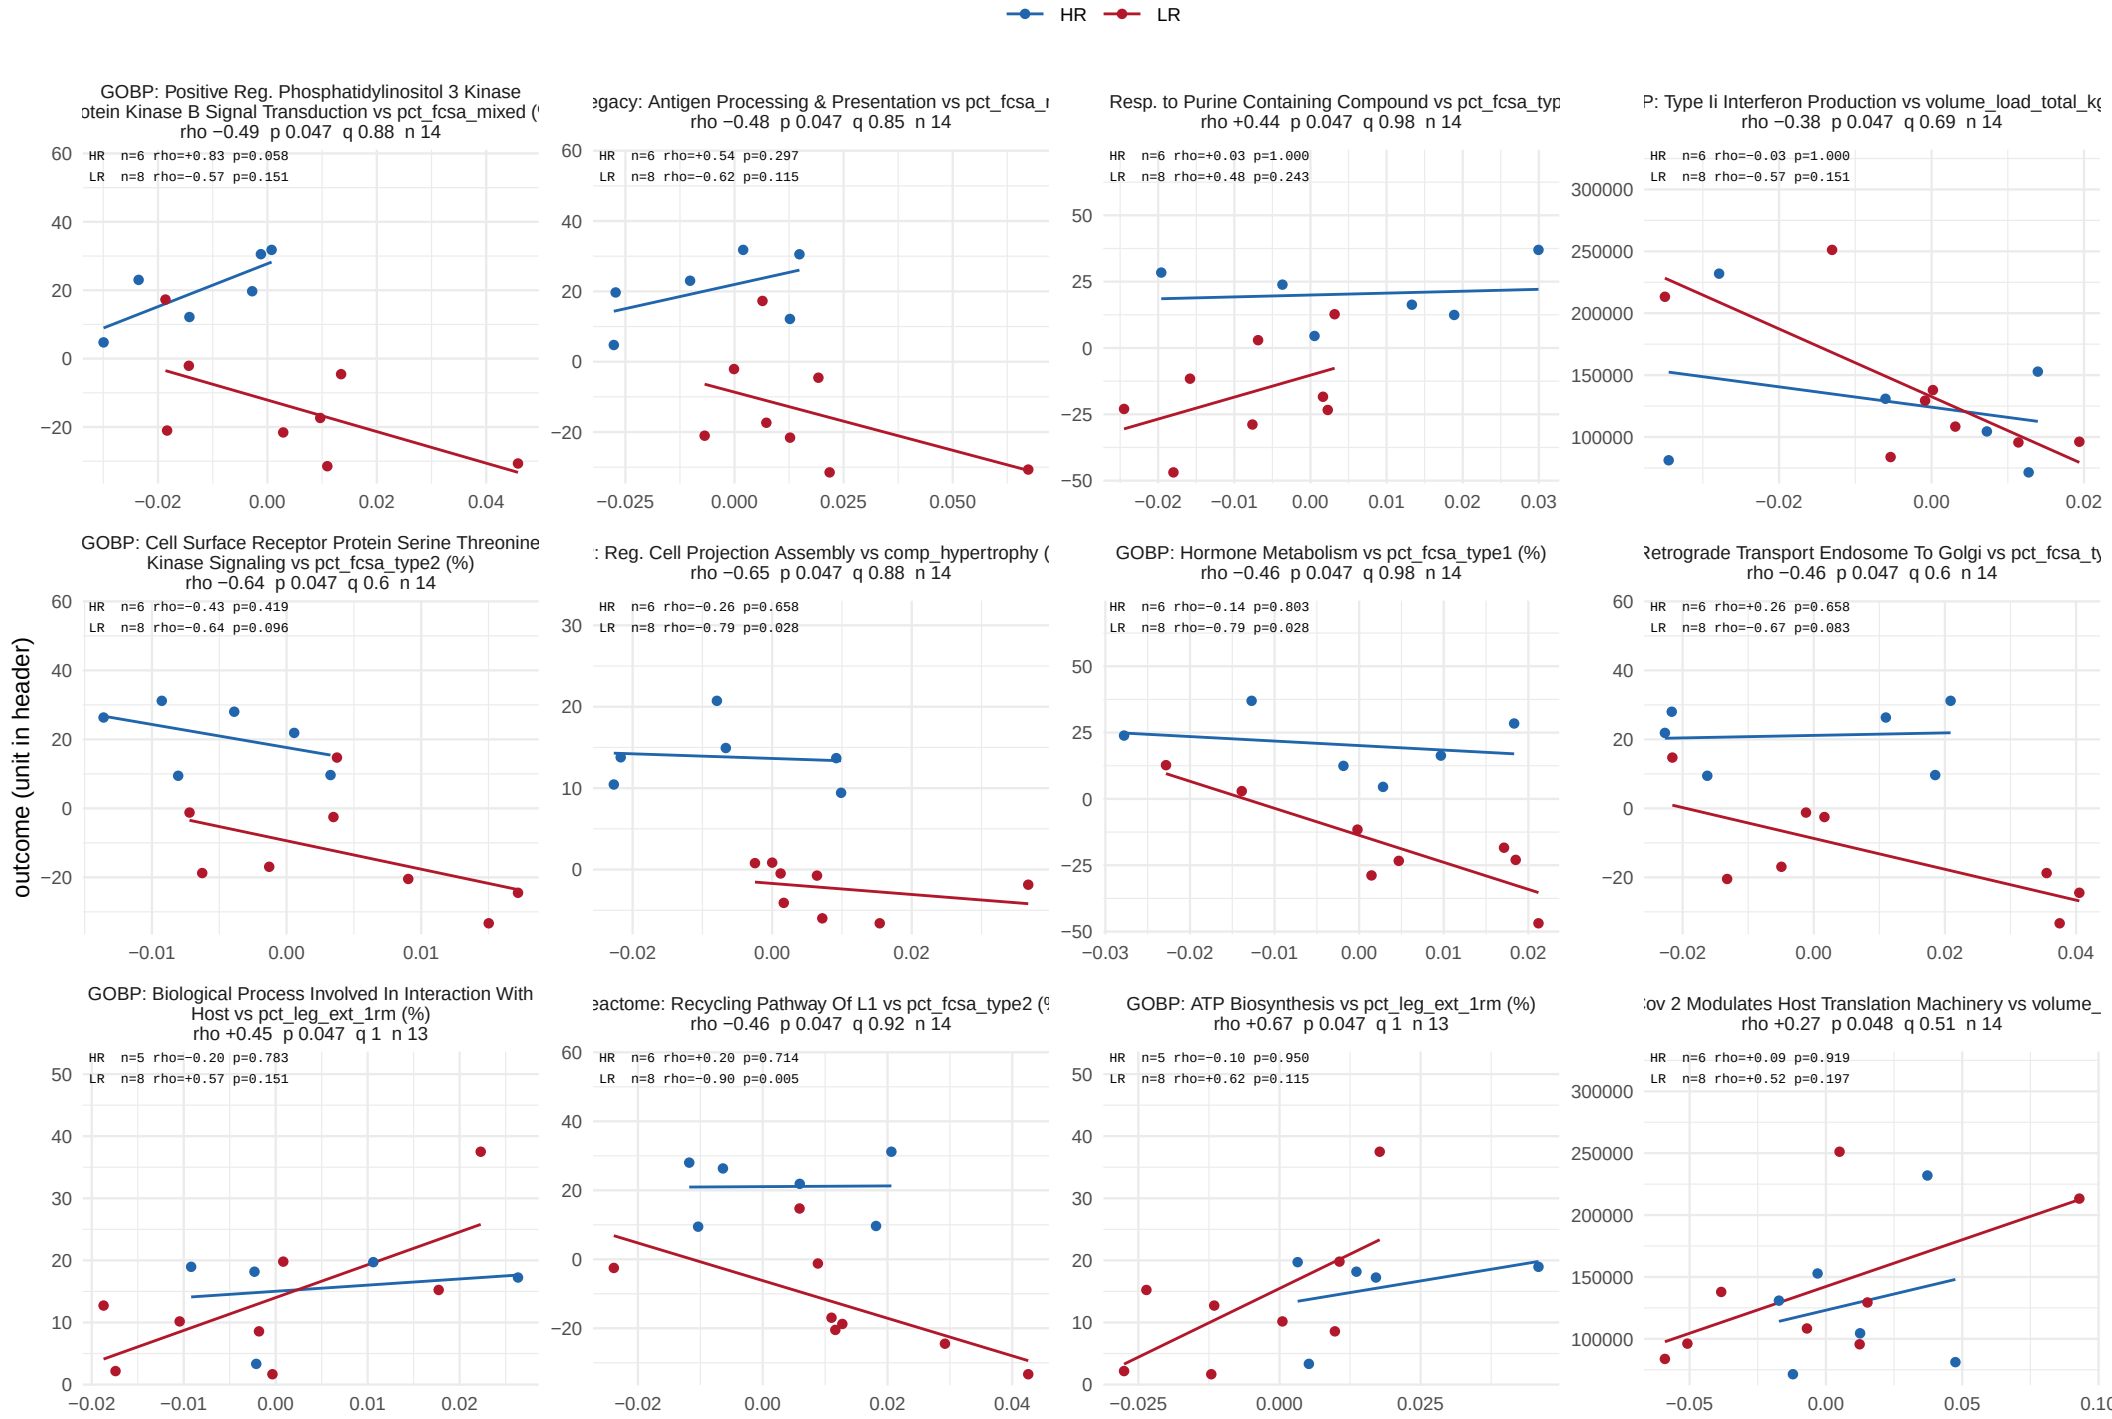

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


415 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 33 of 35.

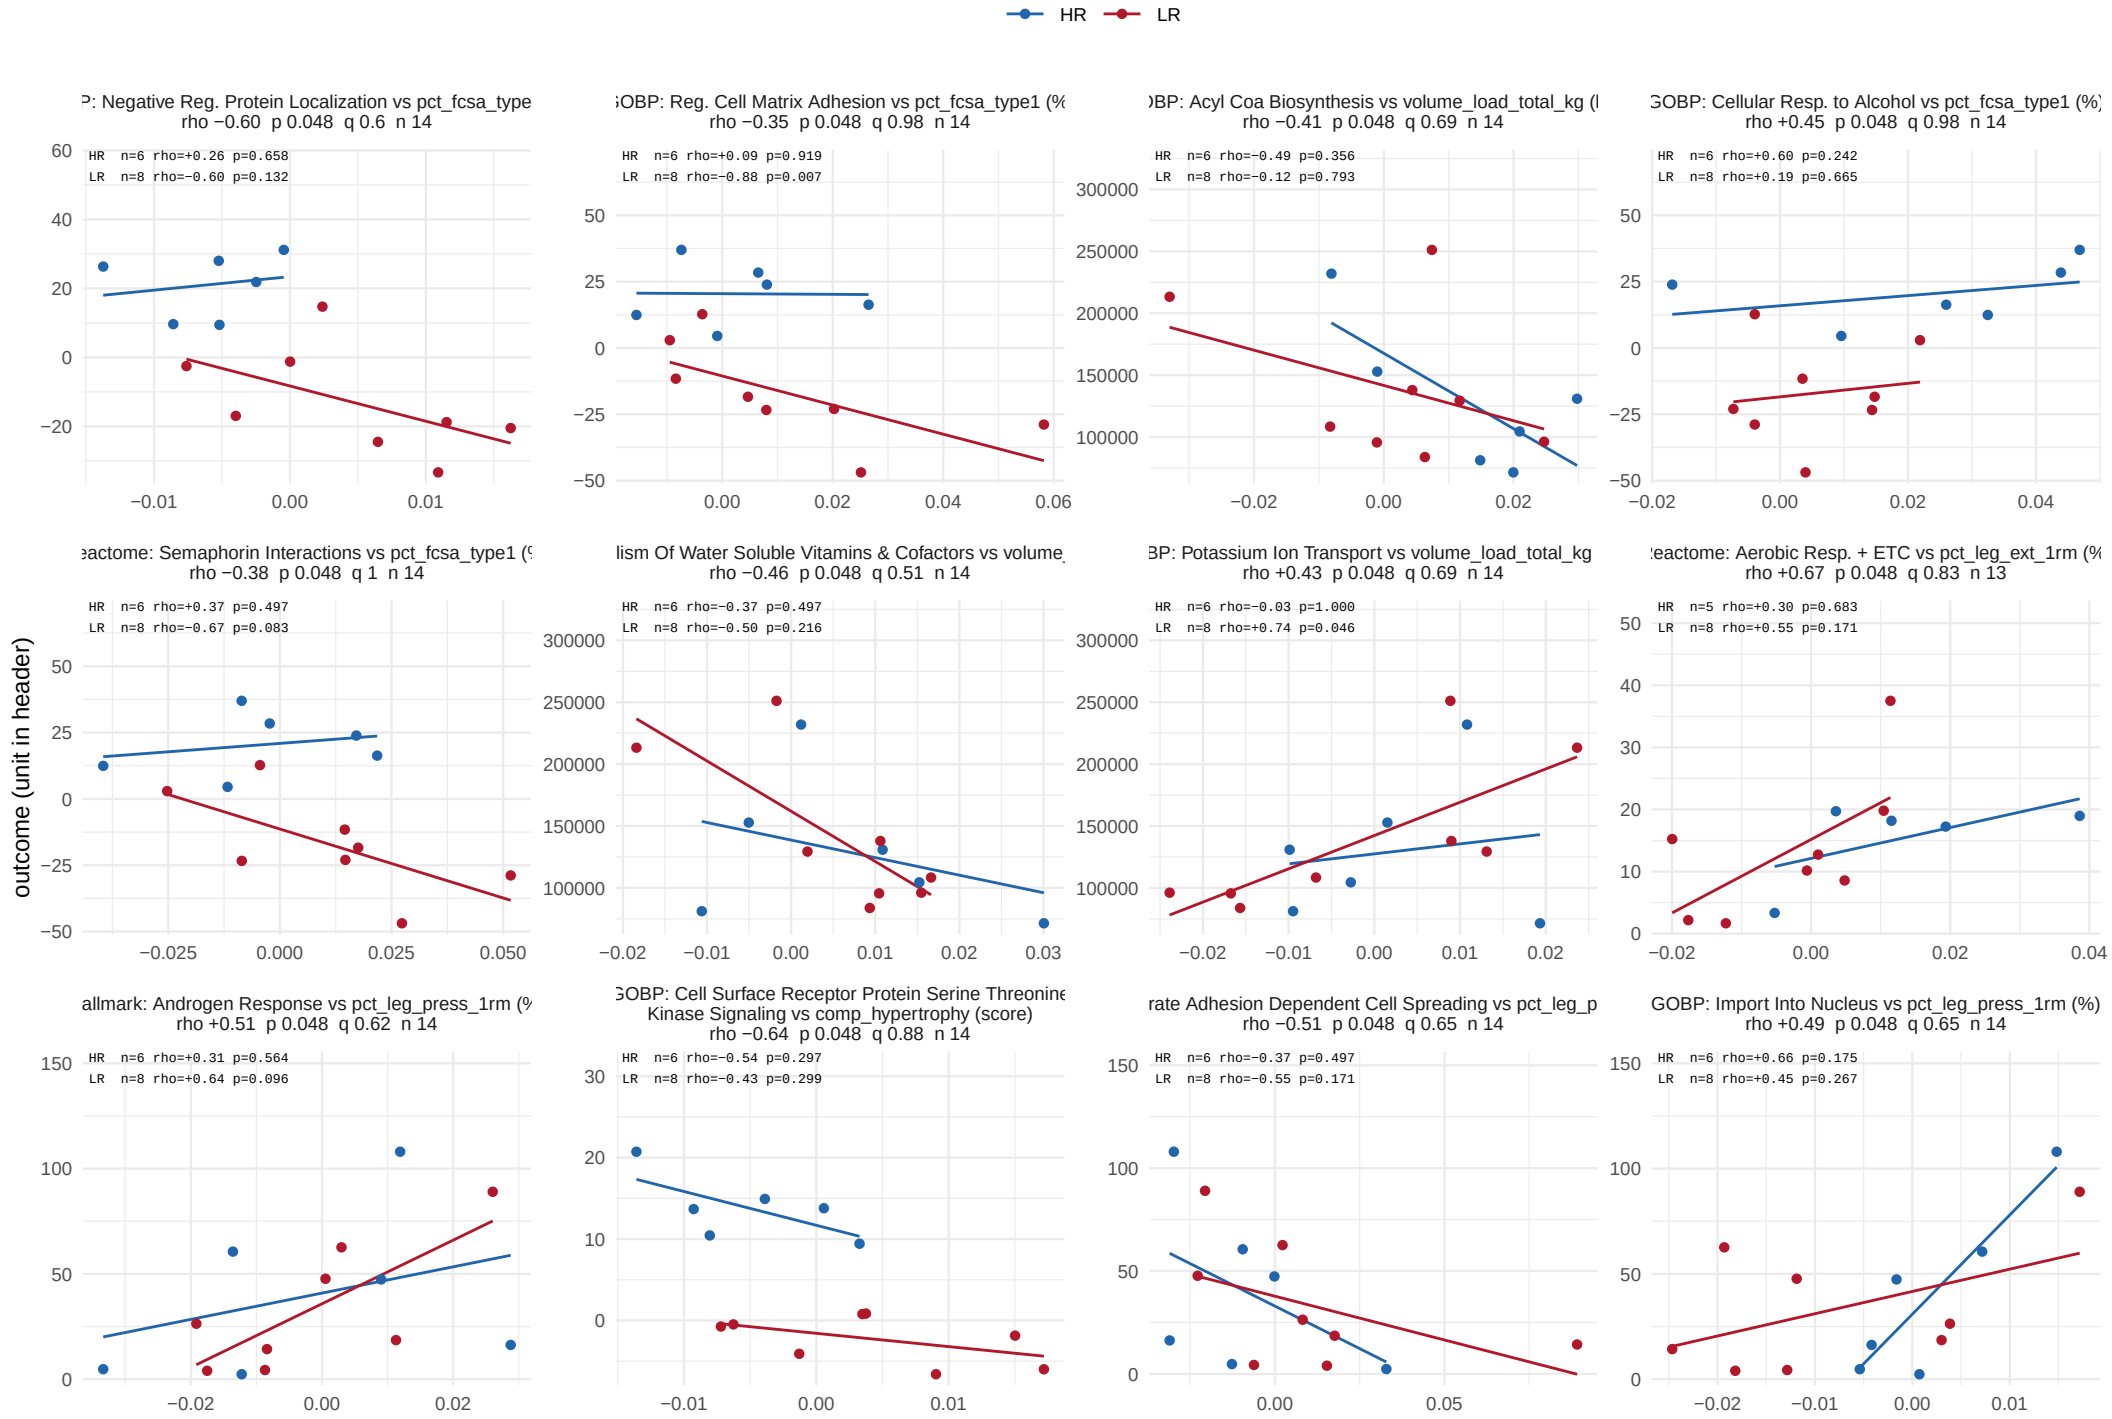

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


415 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 34 of 35.

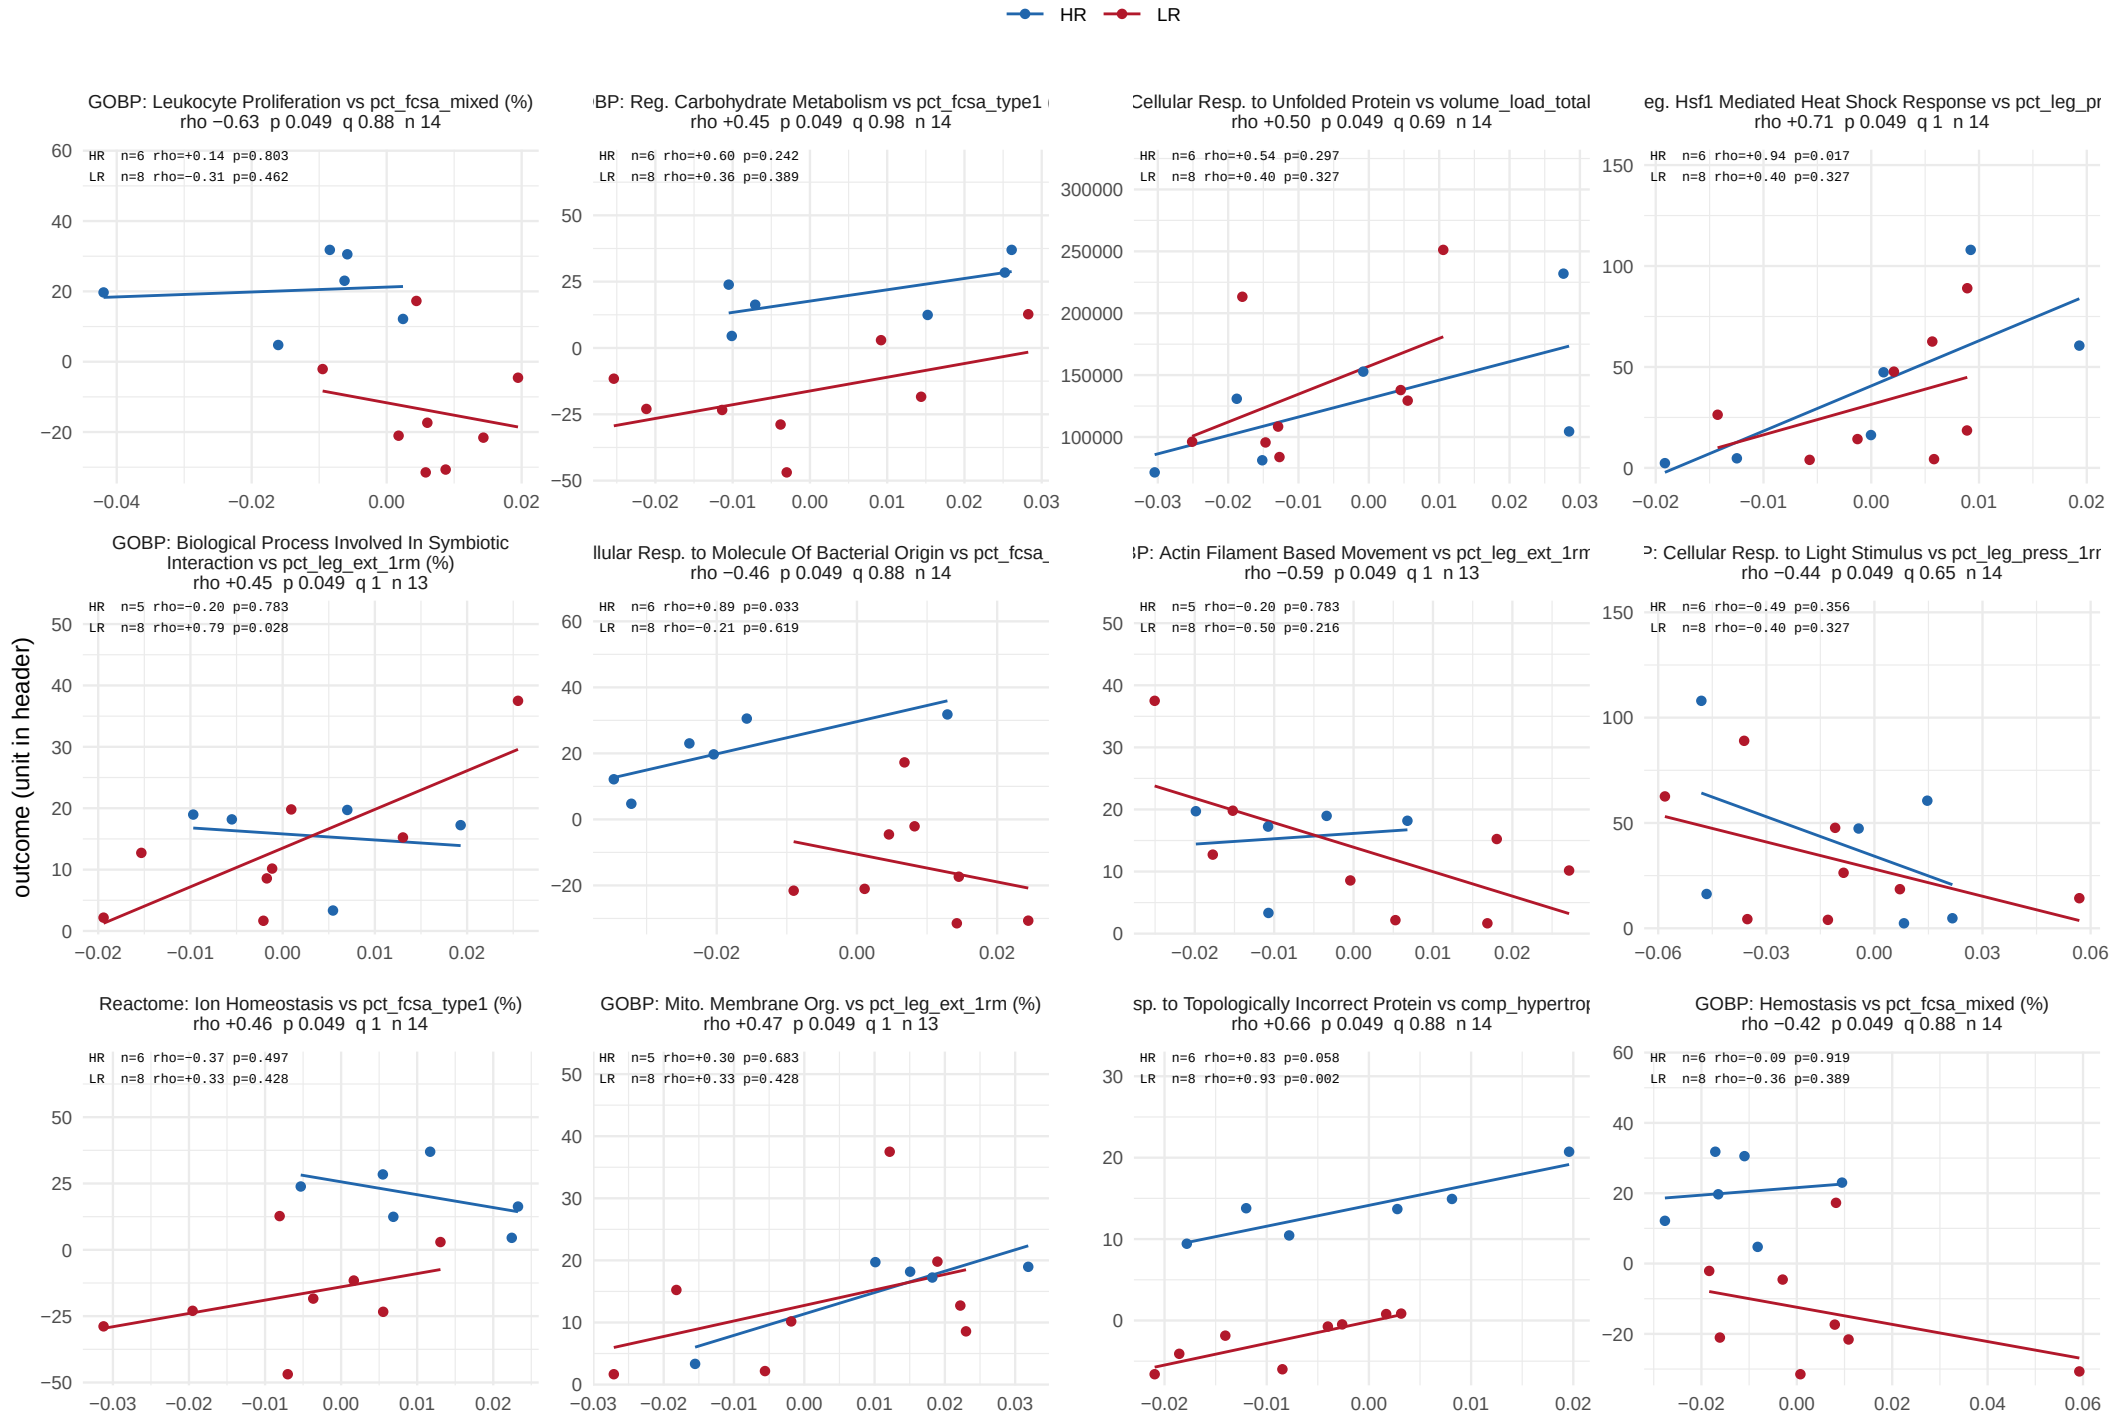

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


415 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 35 of 35.

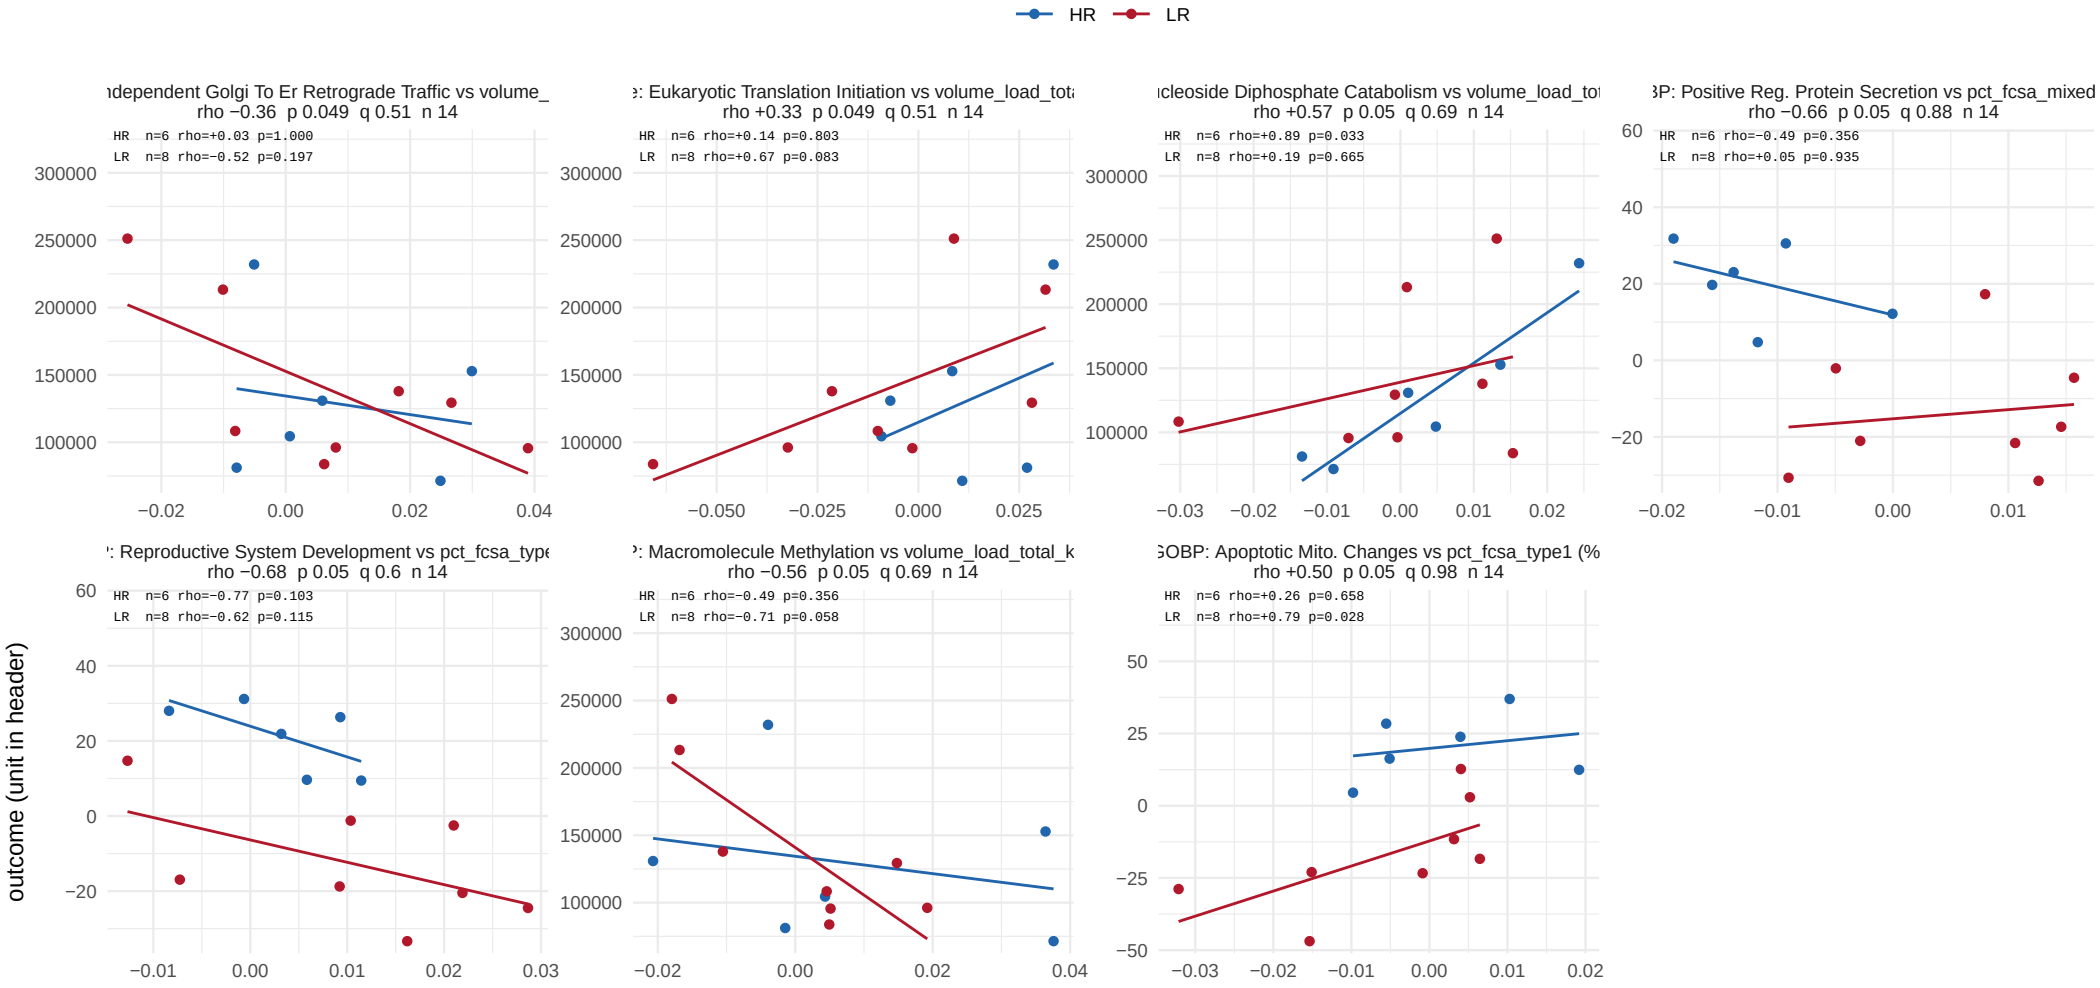

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


418 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 1 of 35.

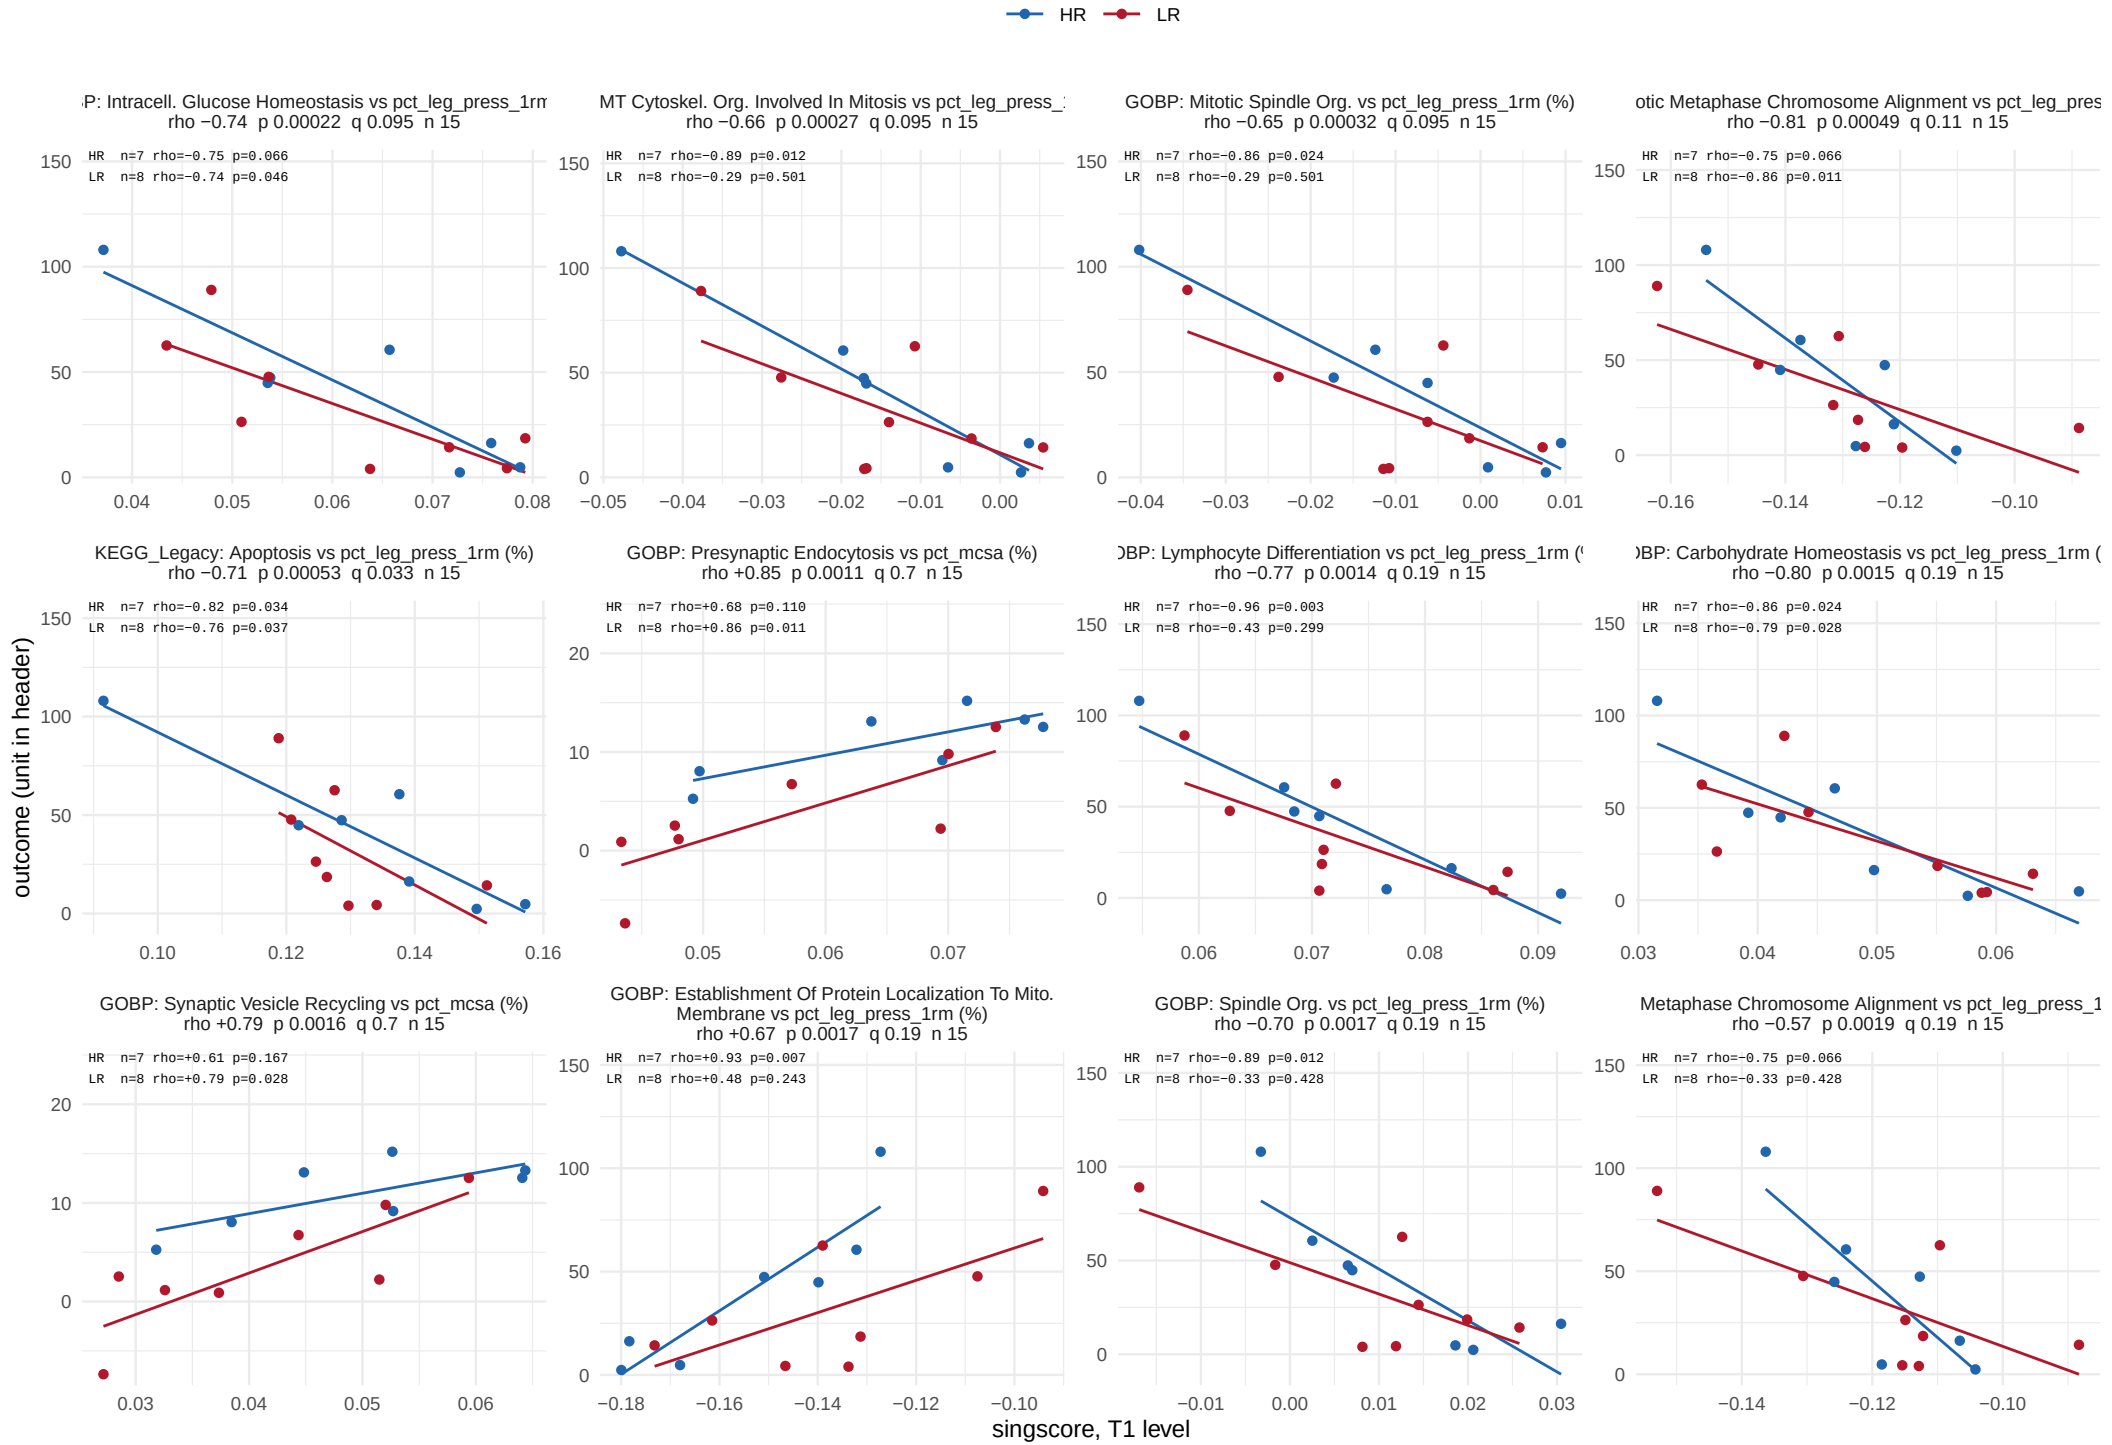

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


418 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 2 of 35.

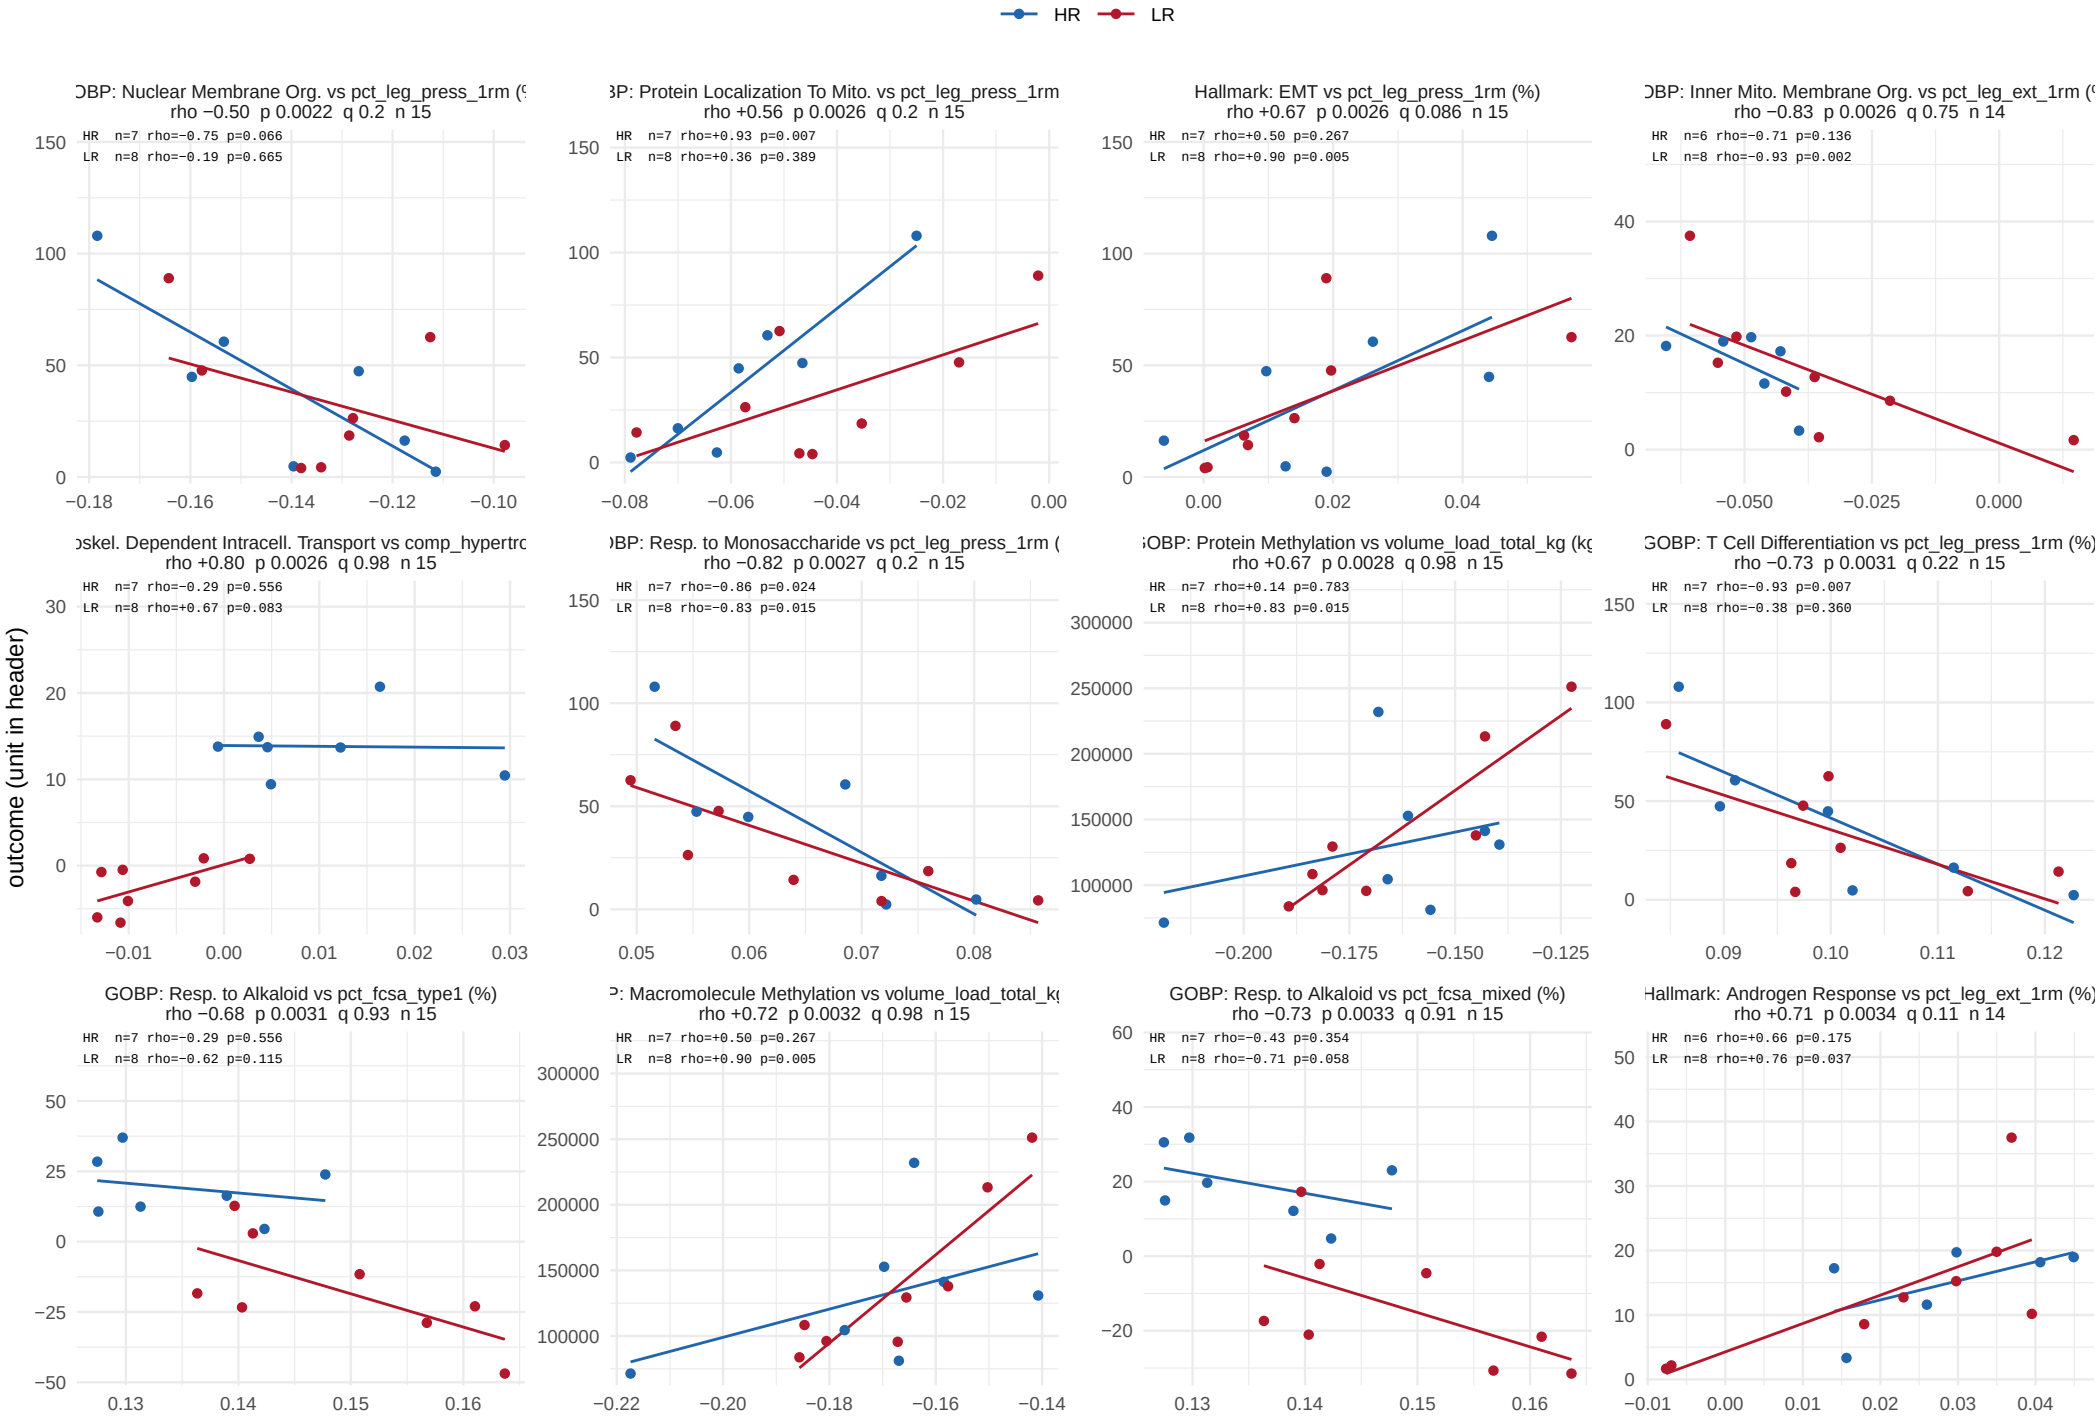

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


418 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 3 of 35.

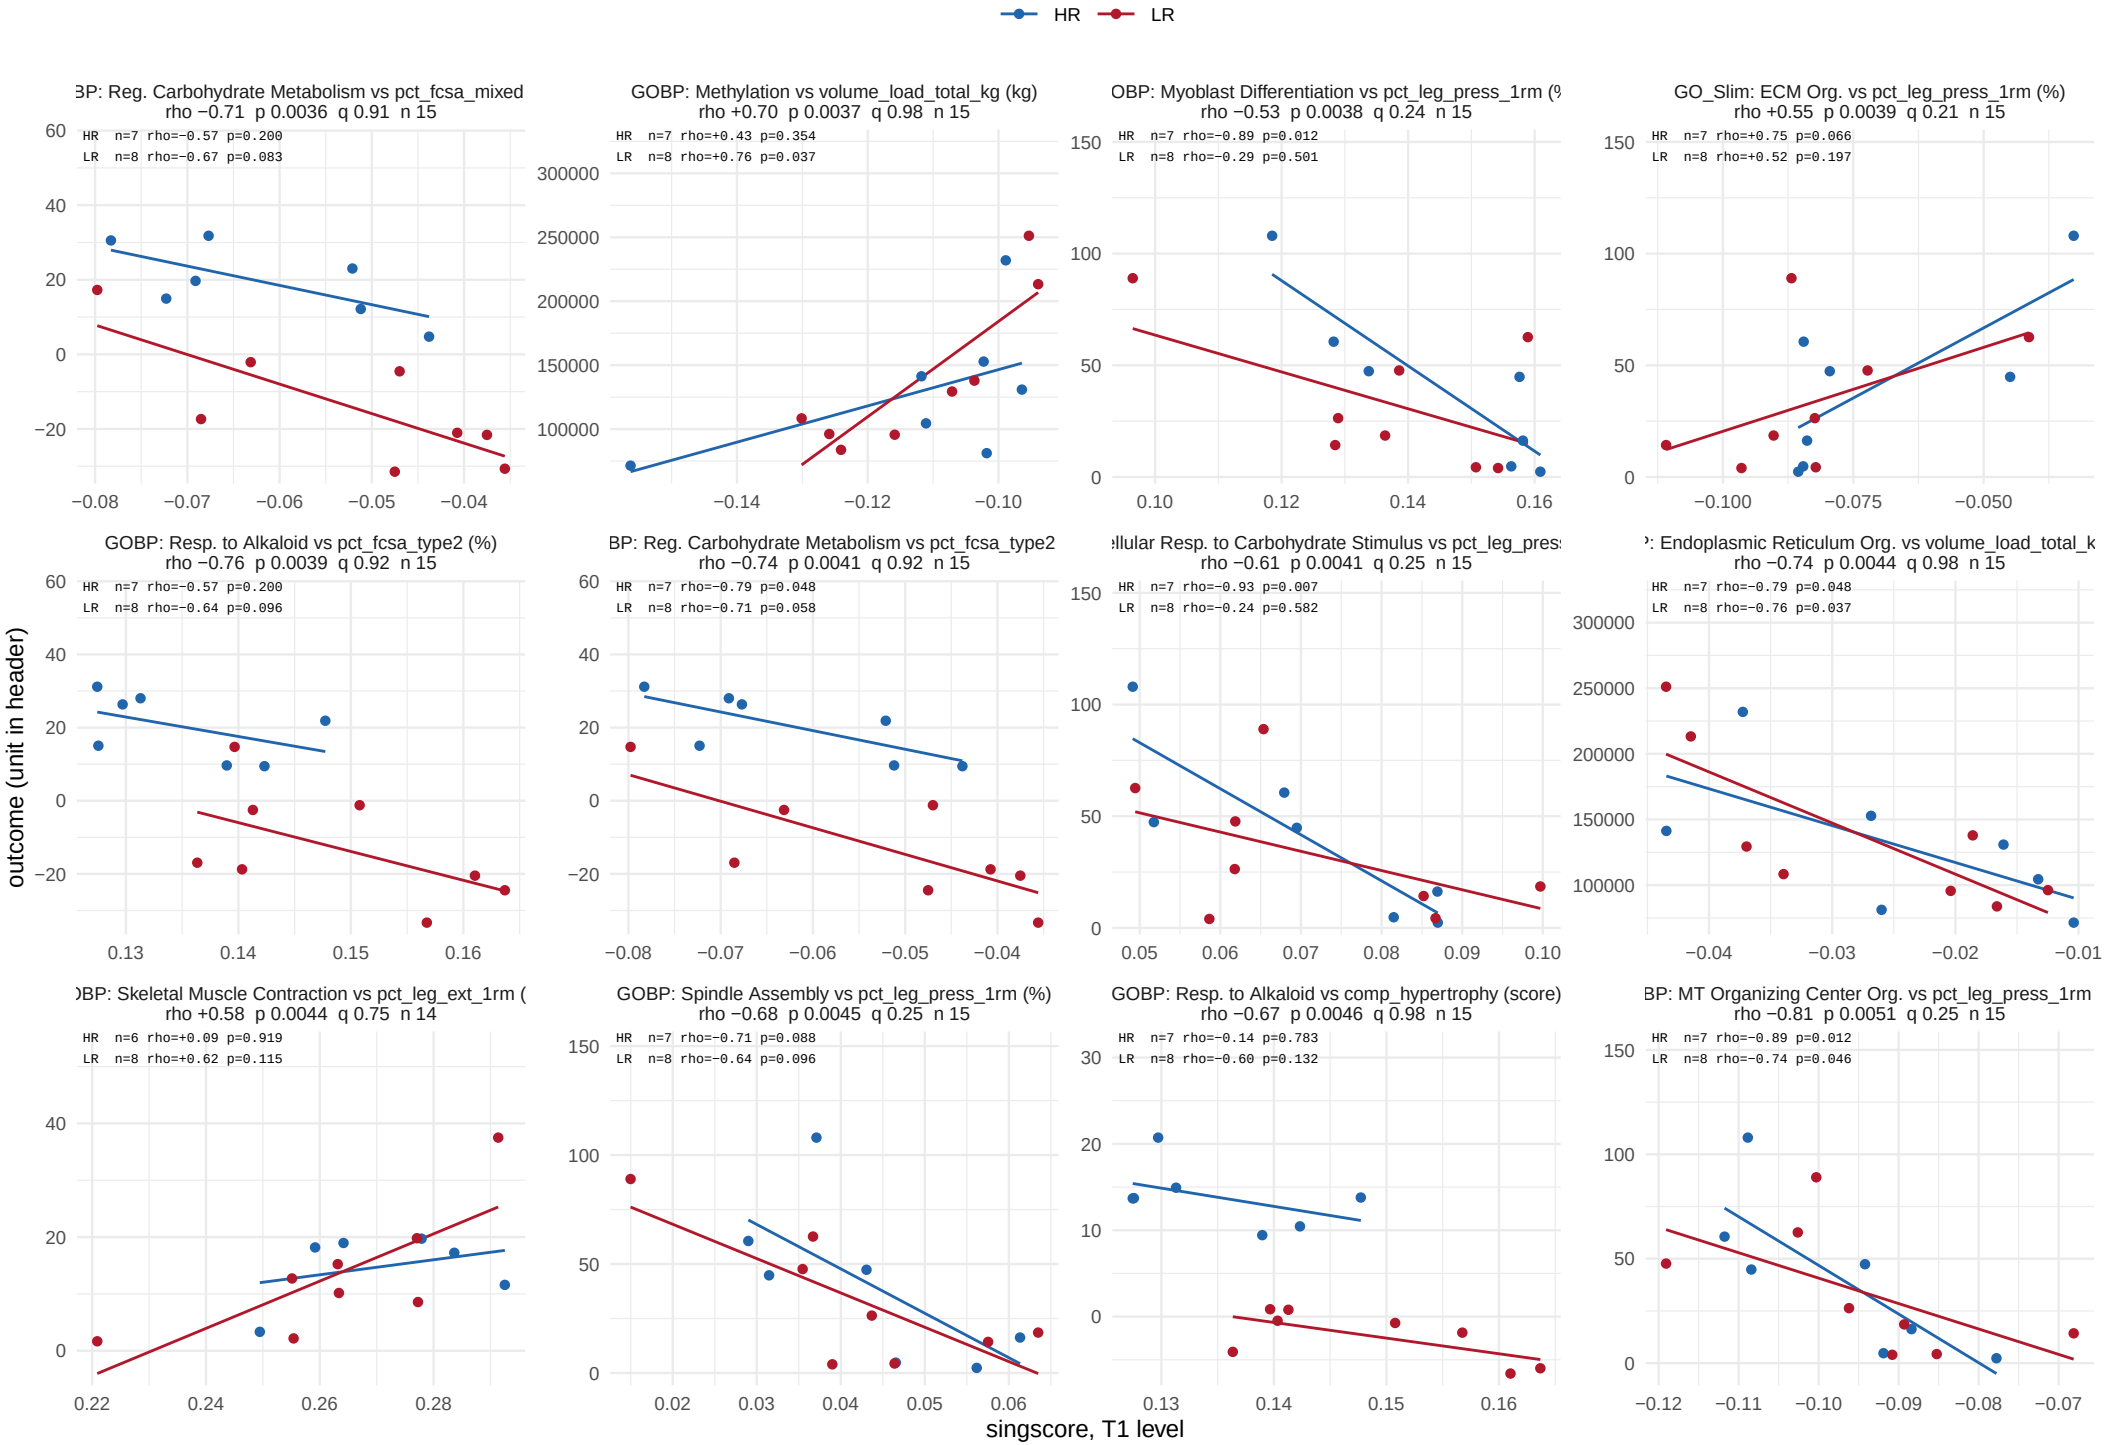

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


418 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 4 of 35.

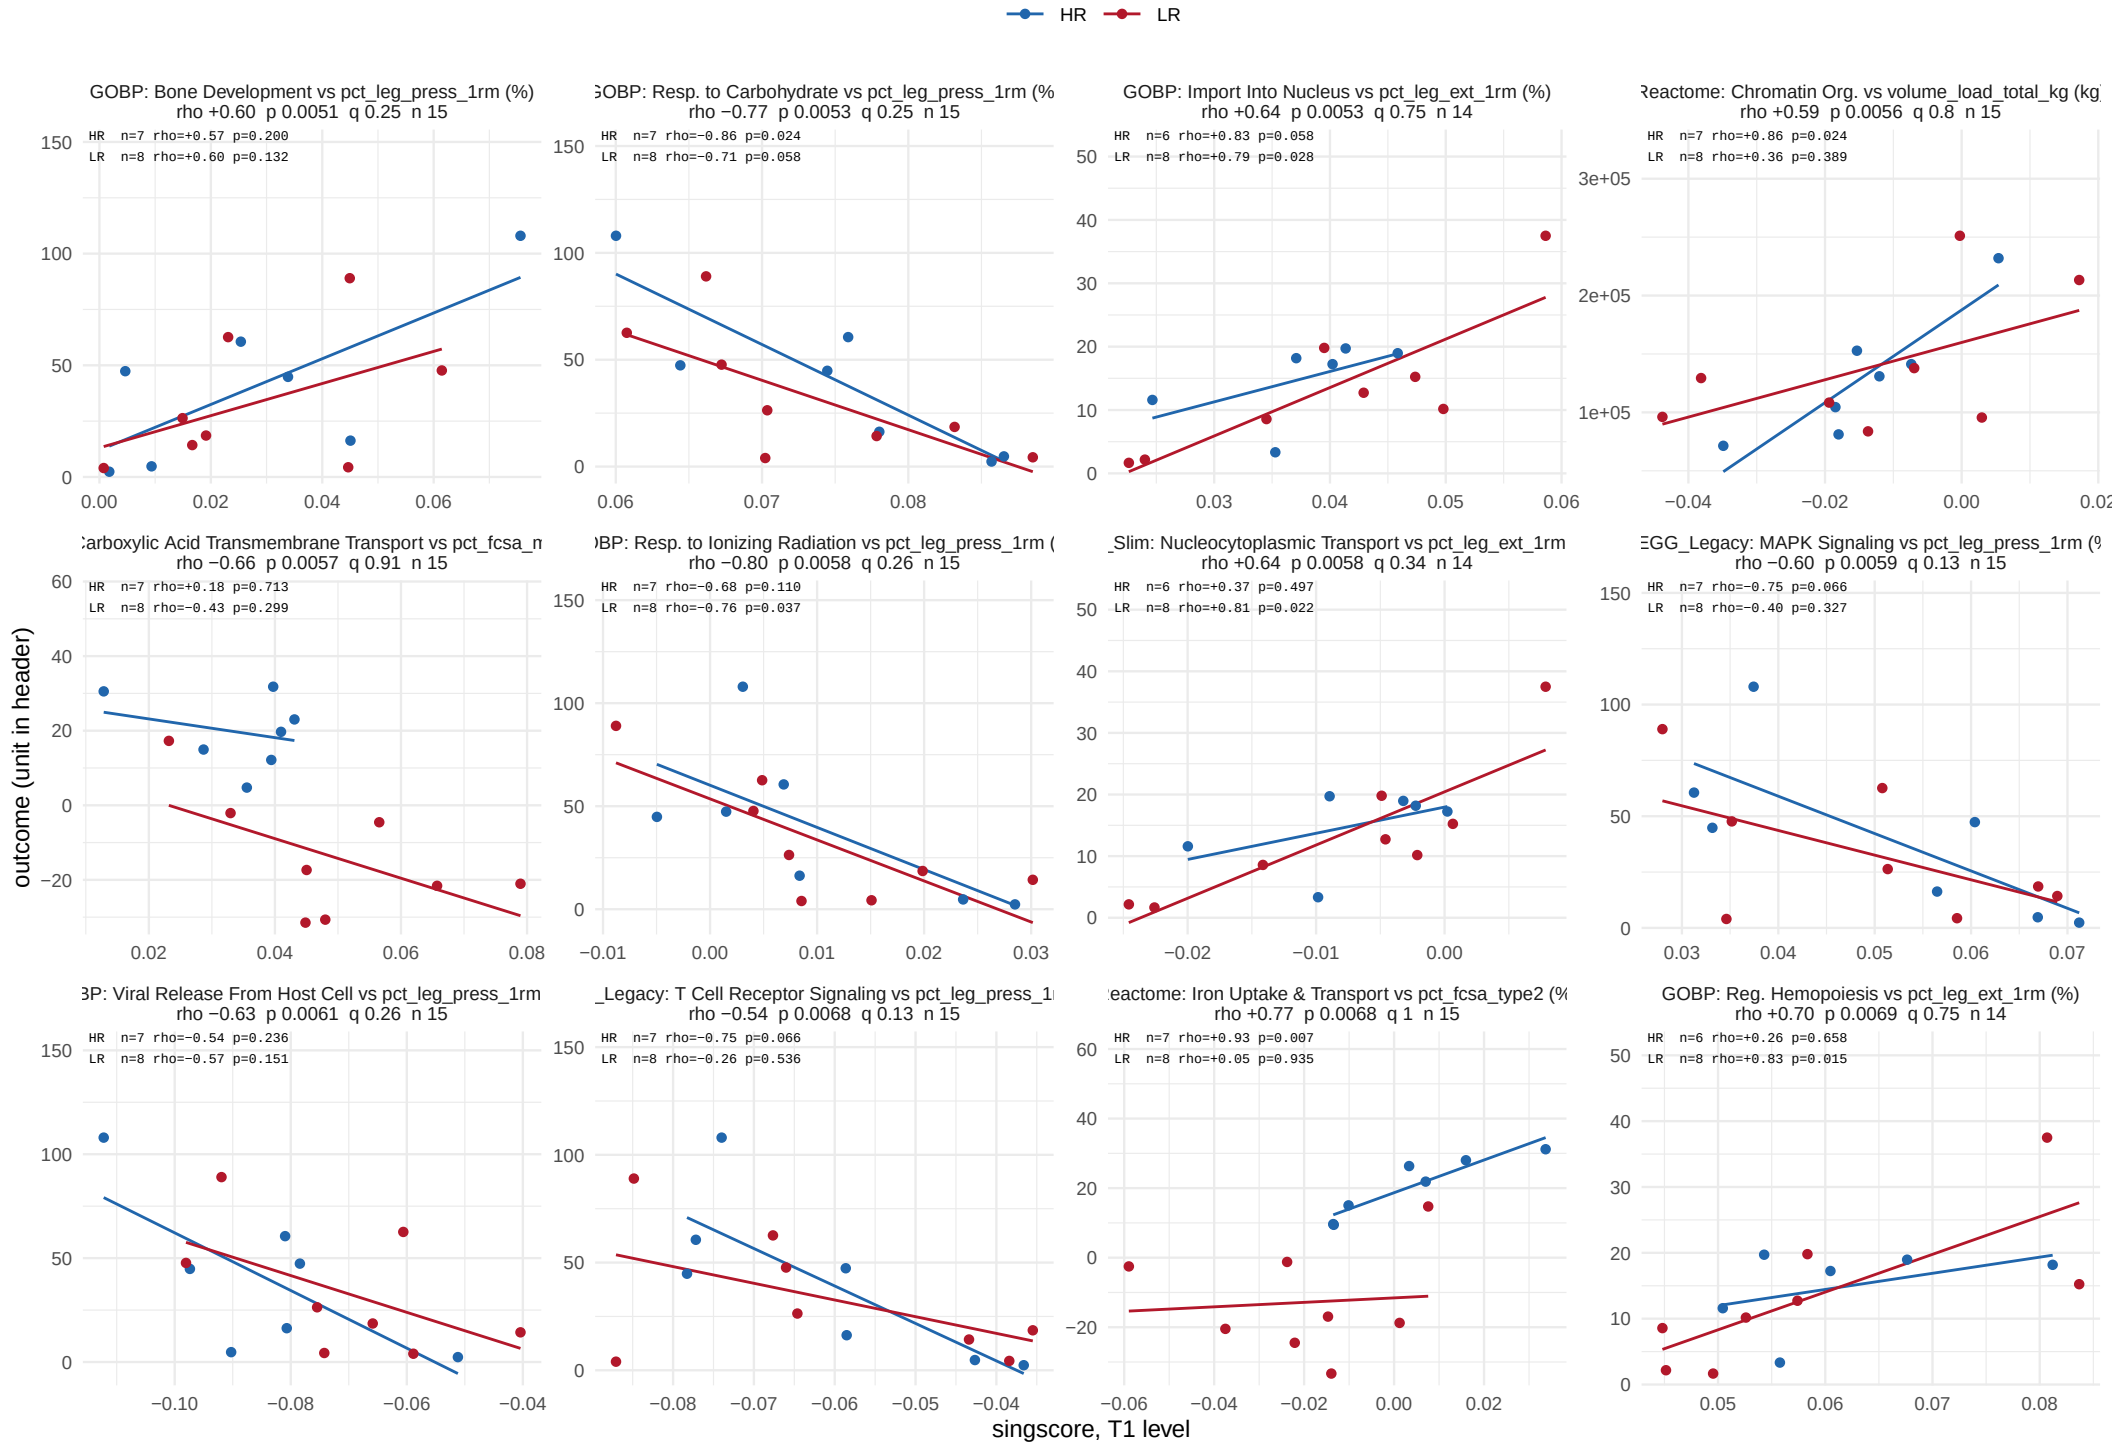

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


418 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 5 of 35.

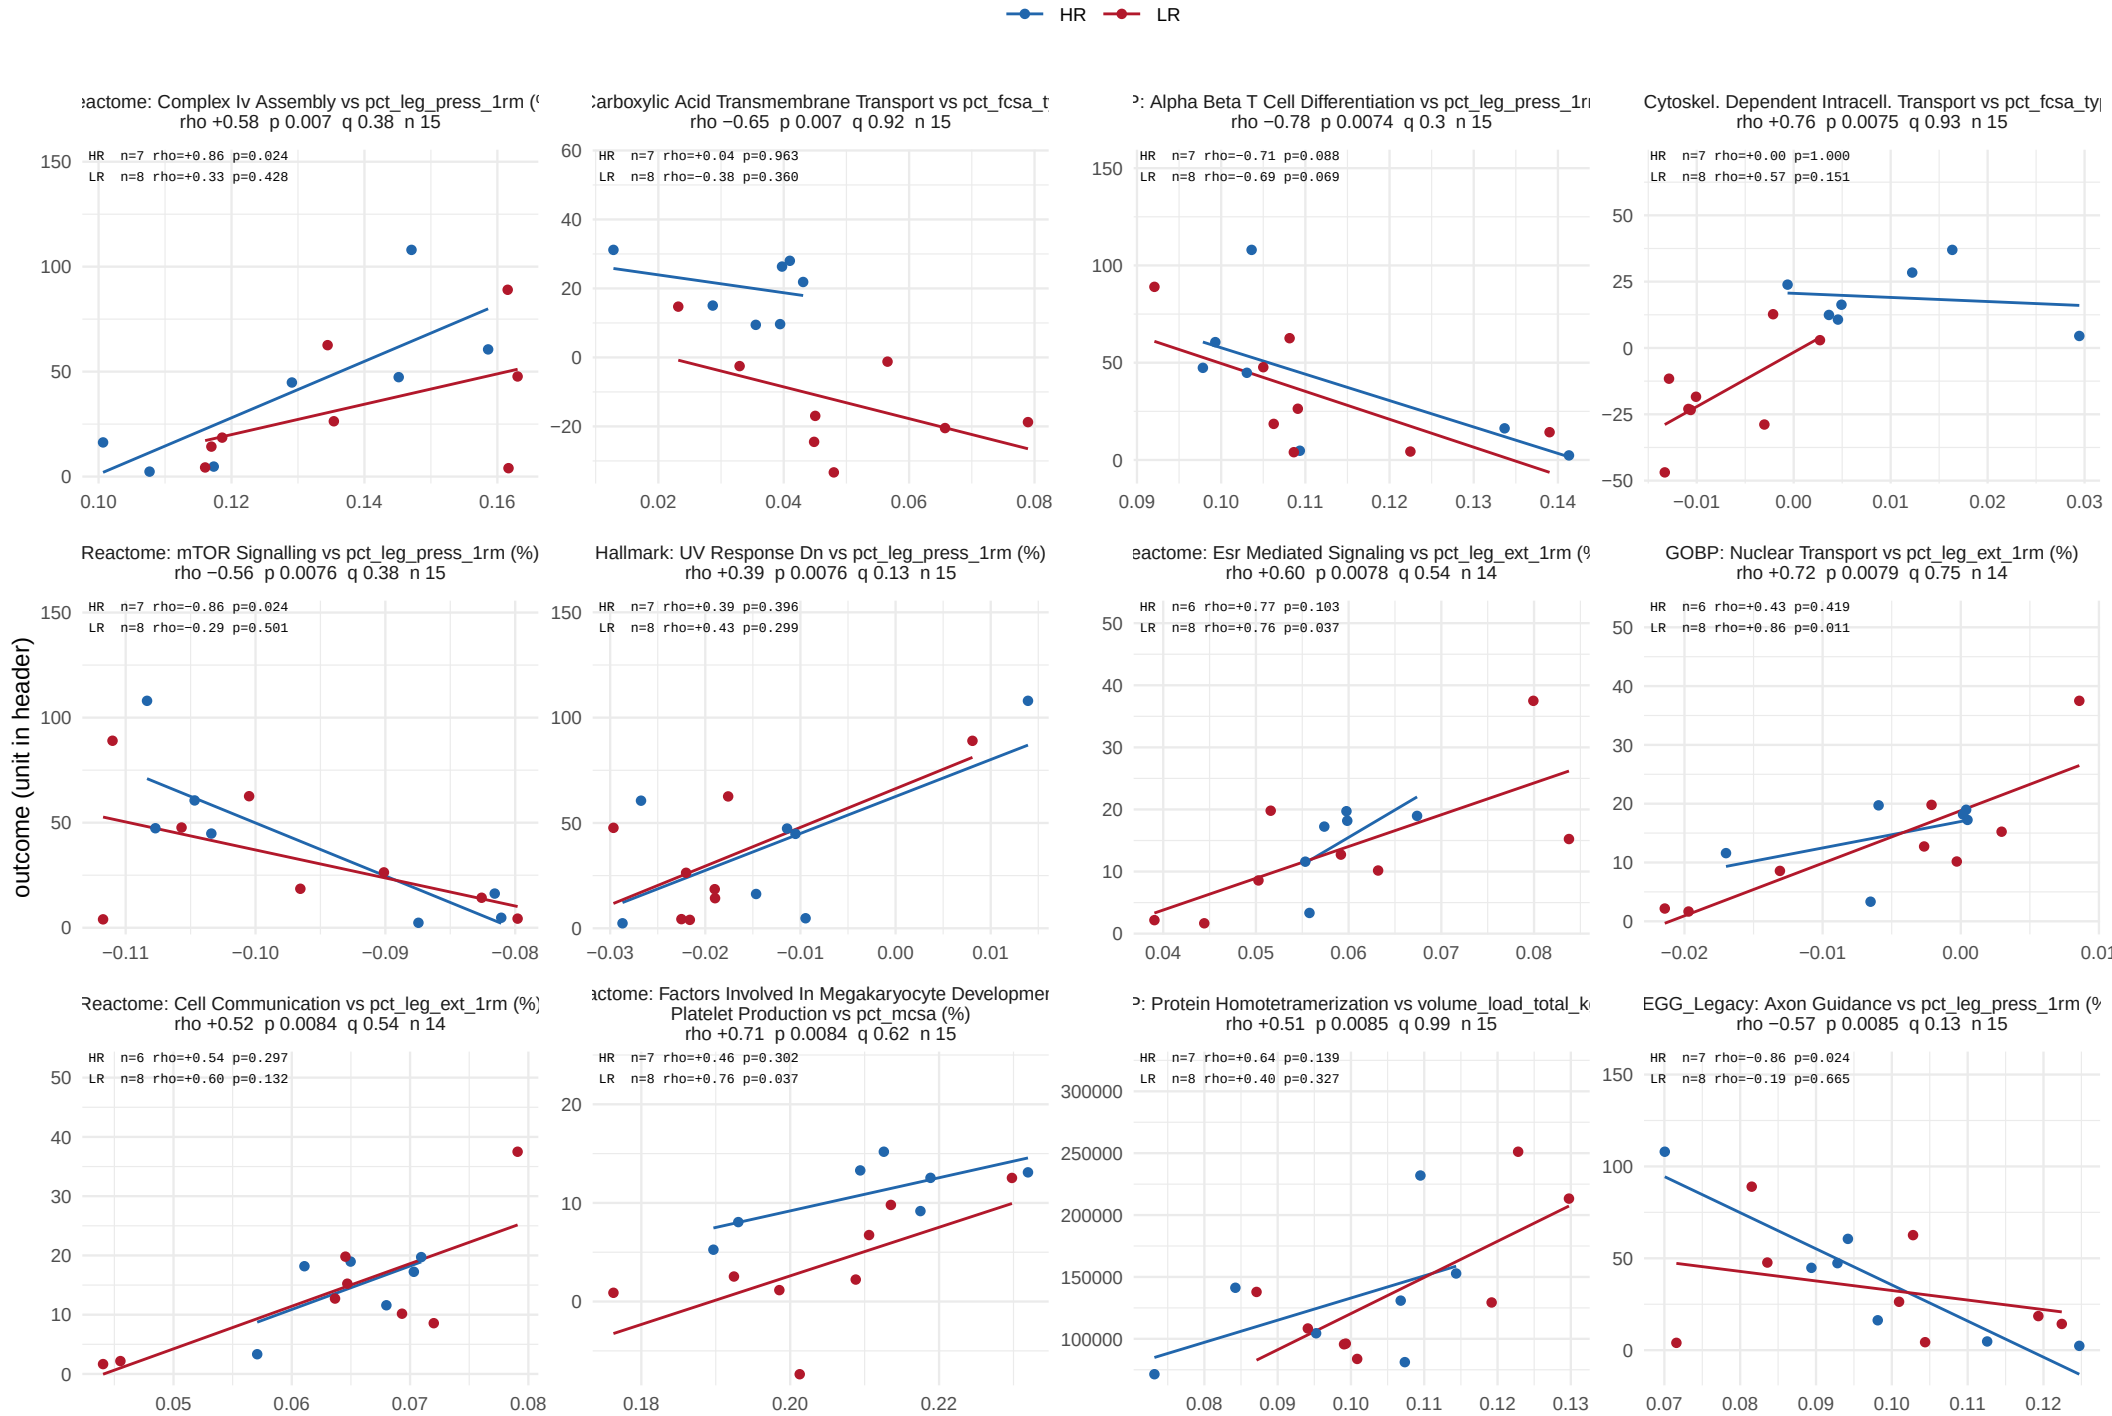

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


418 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 6 of 35.

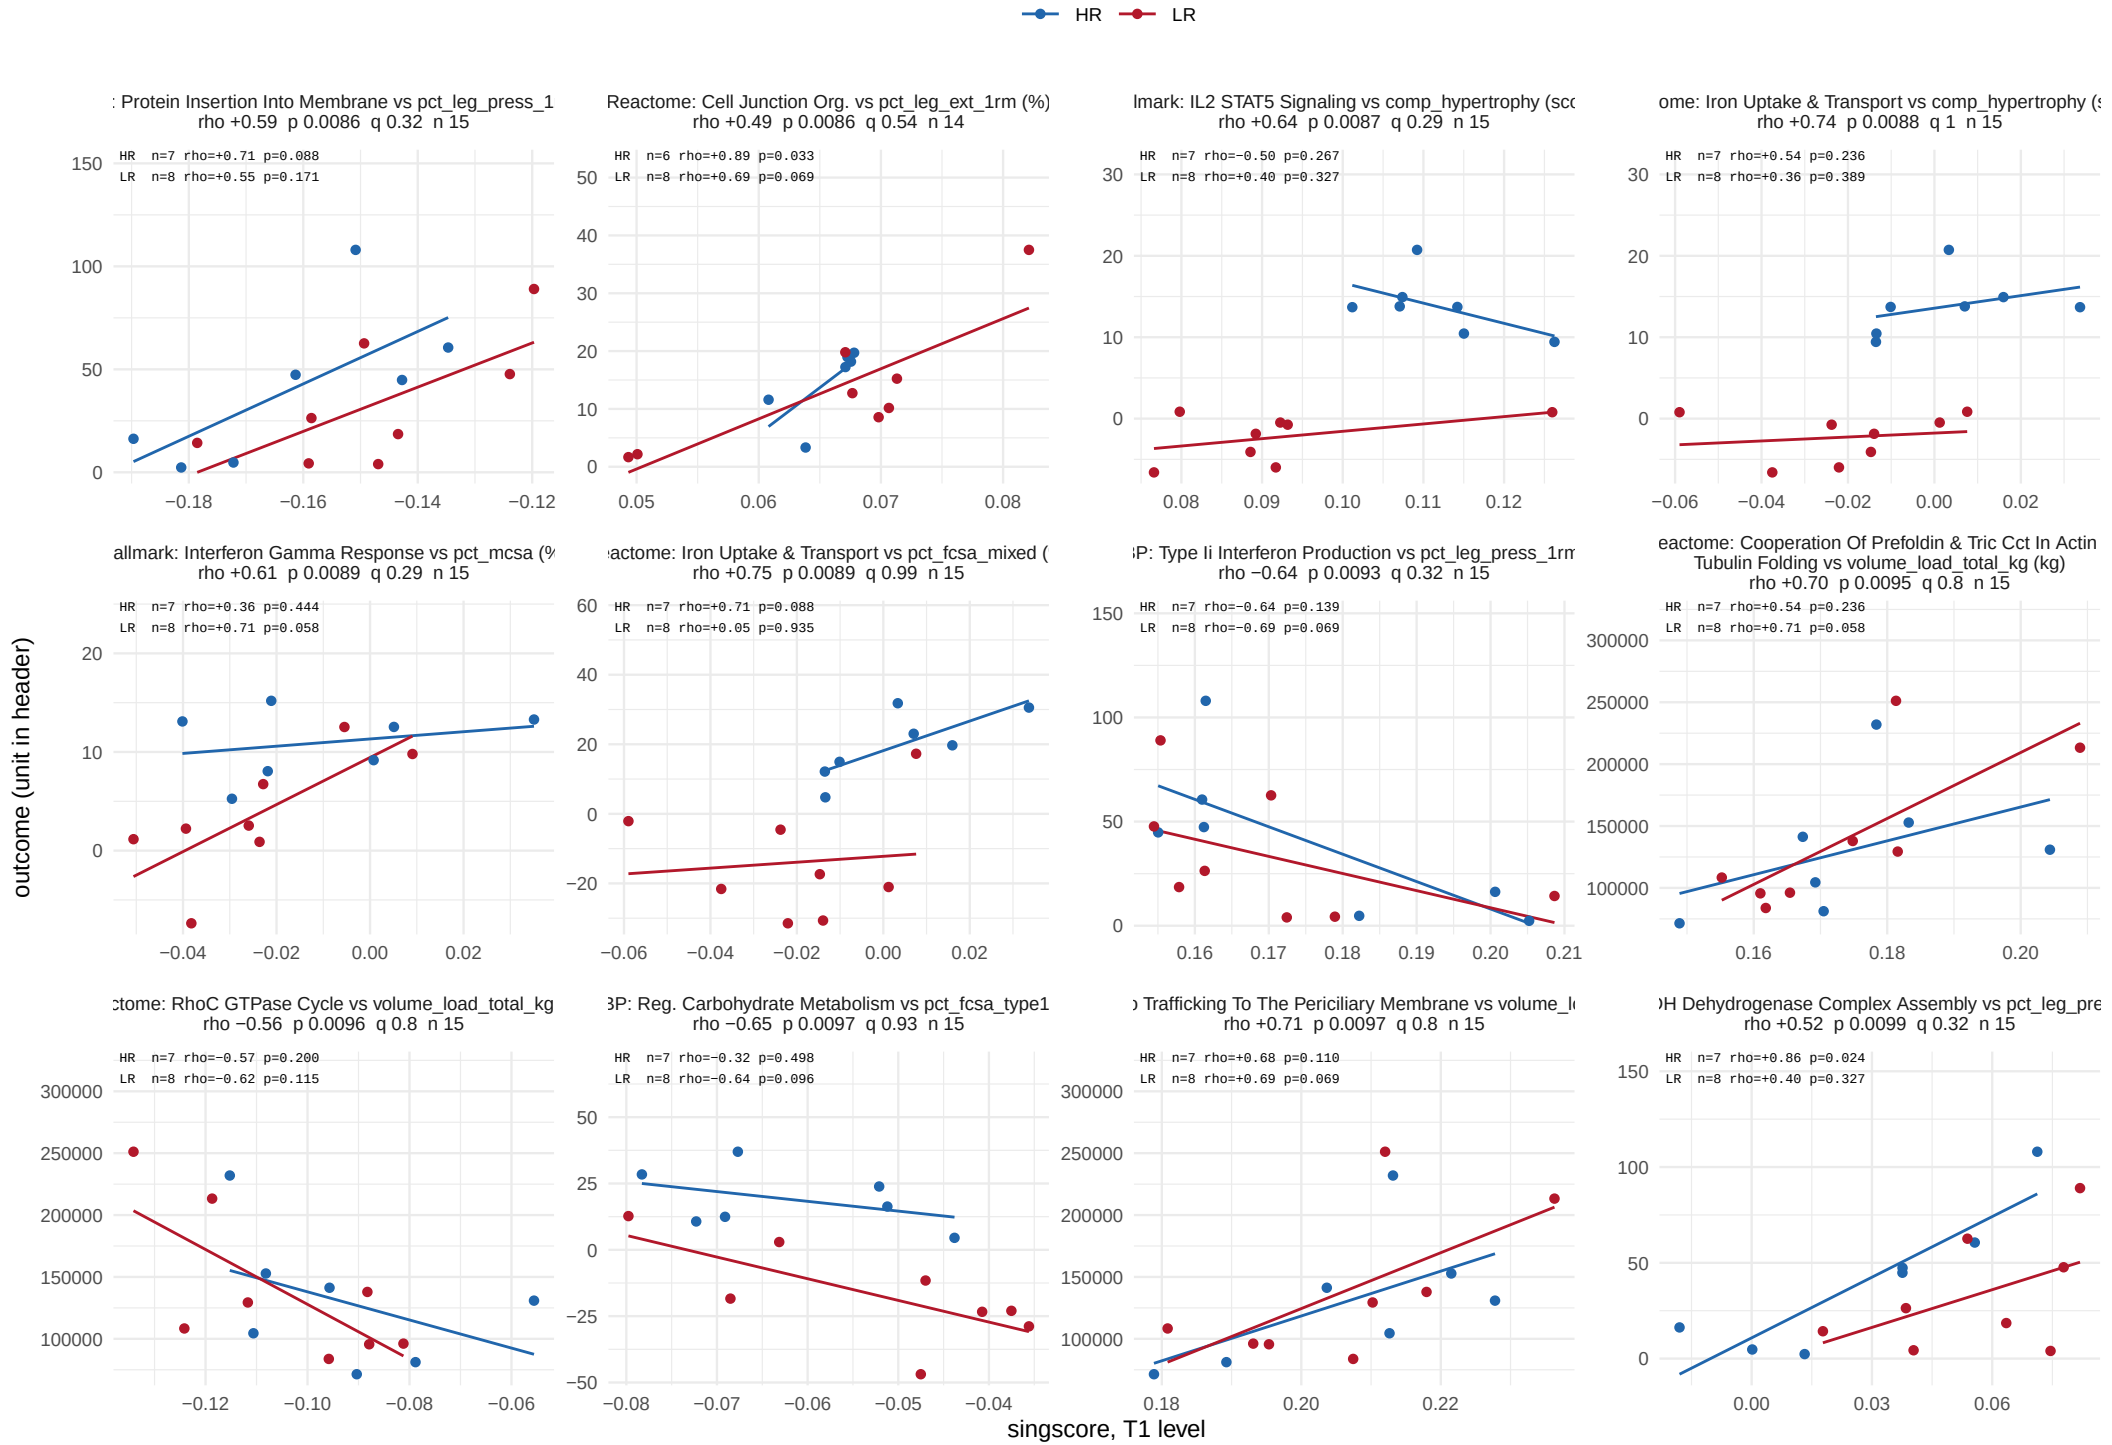

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


418 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 7 of 35.

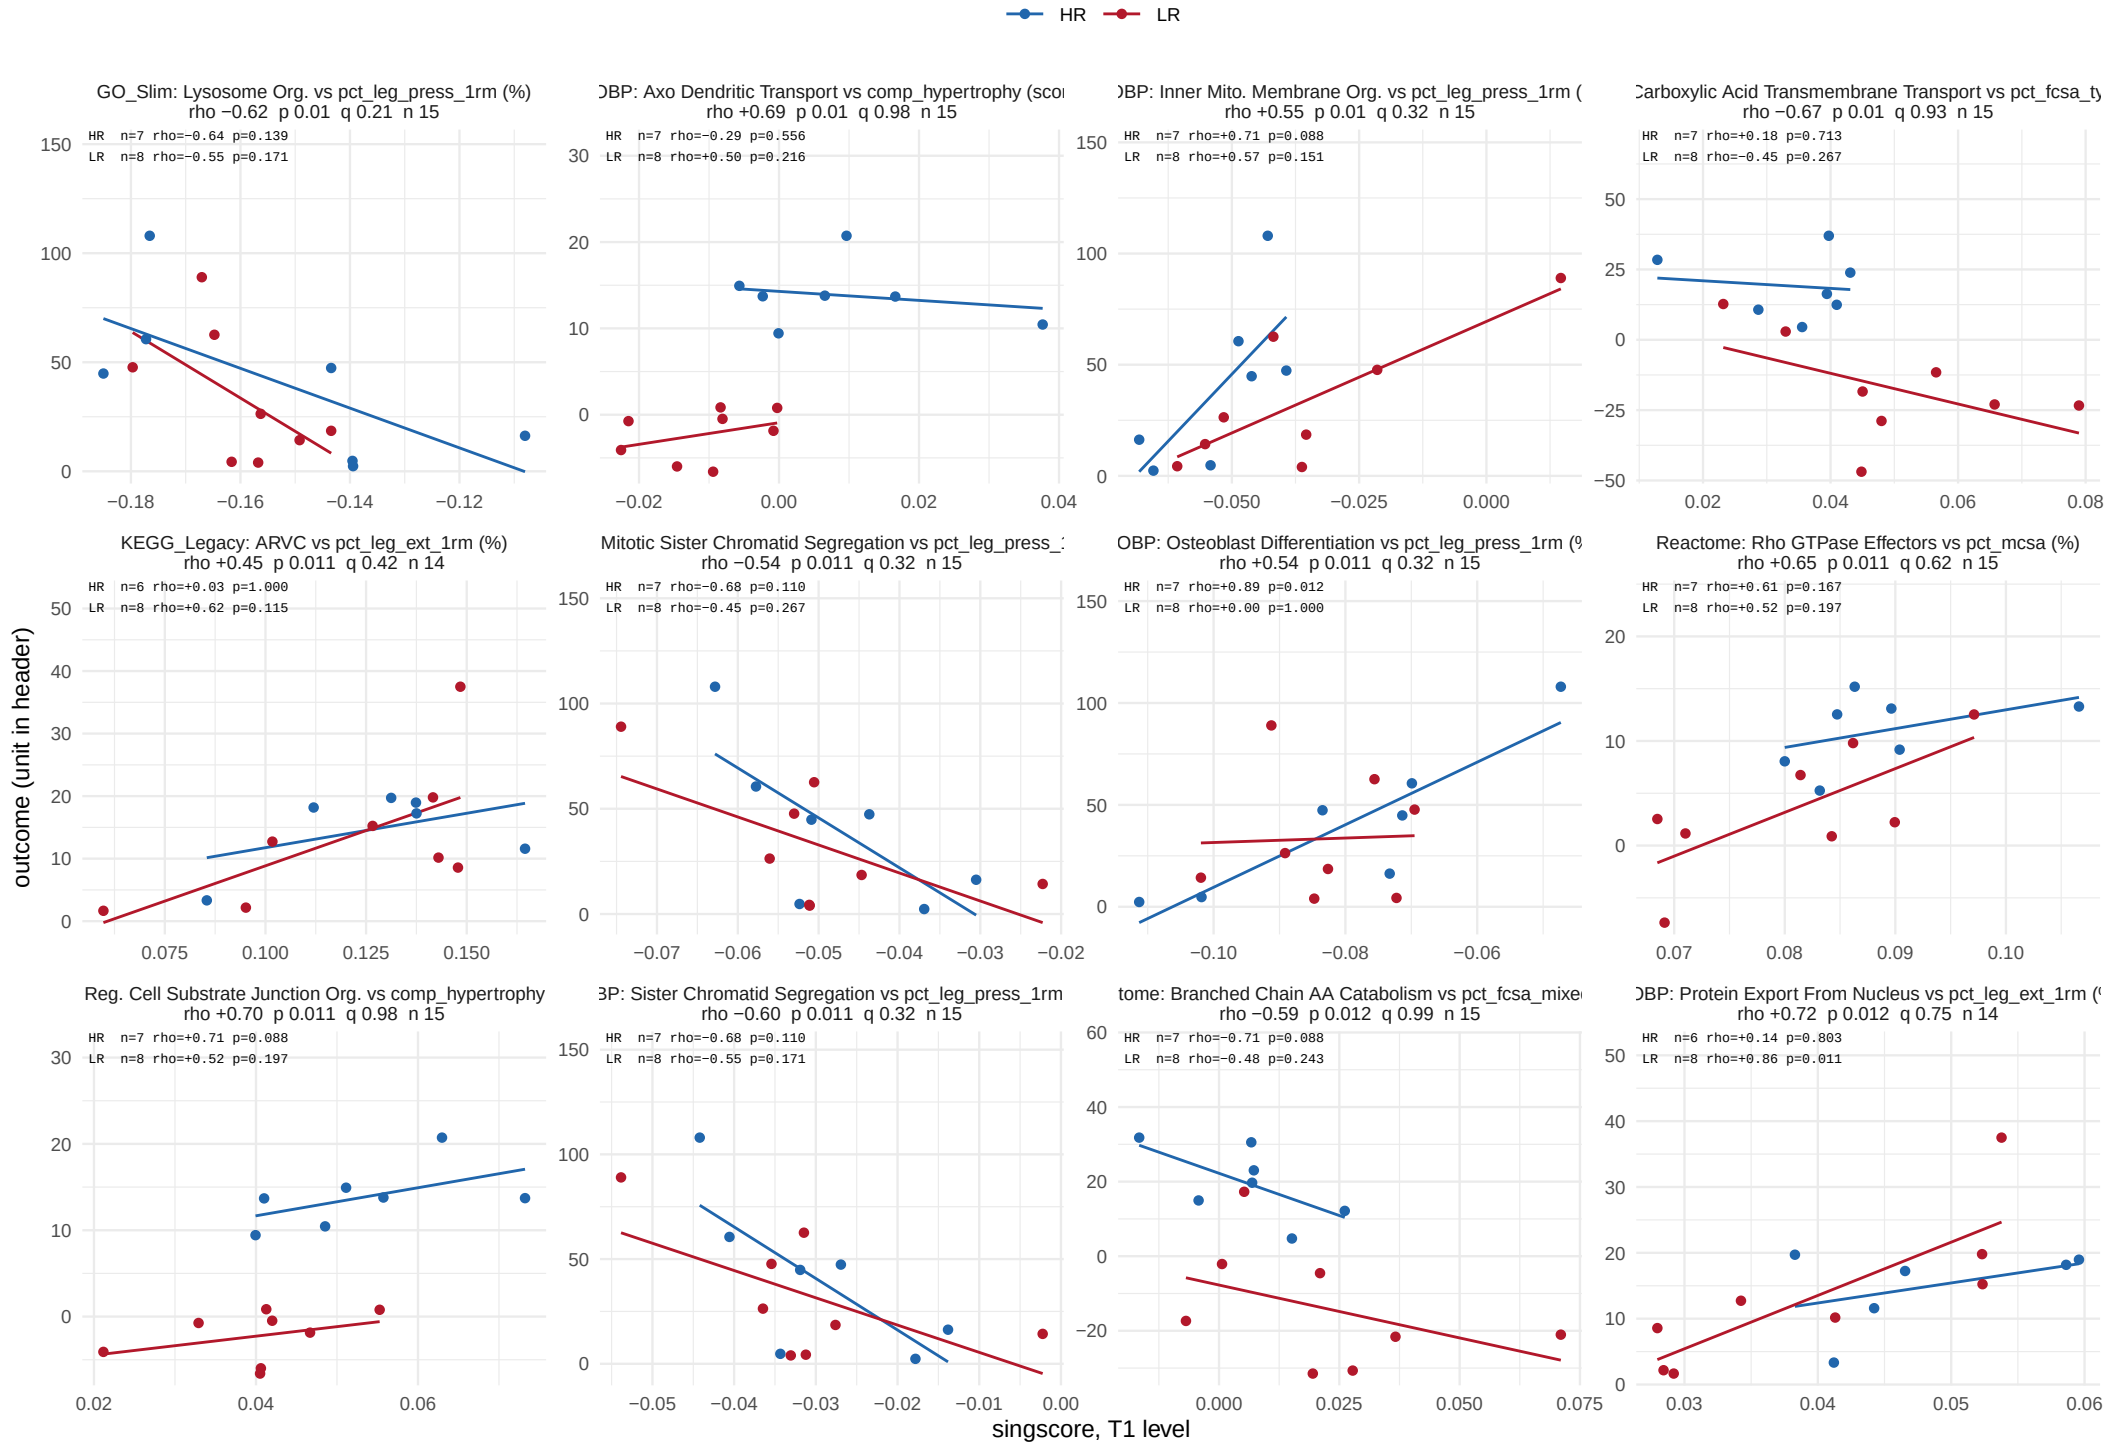

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


418 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 8 of 35.

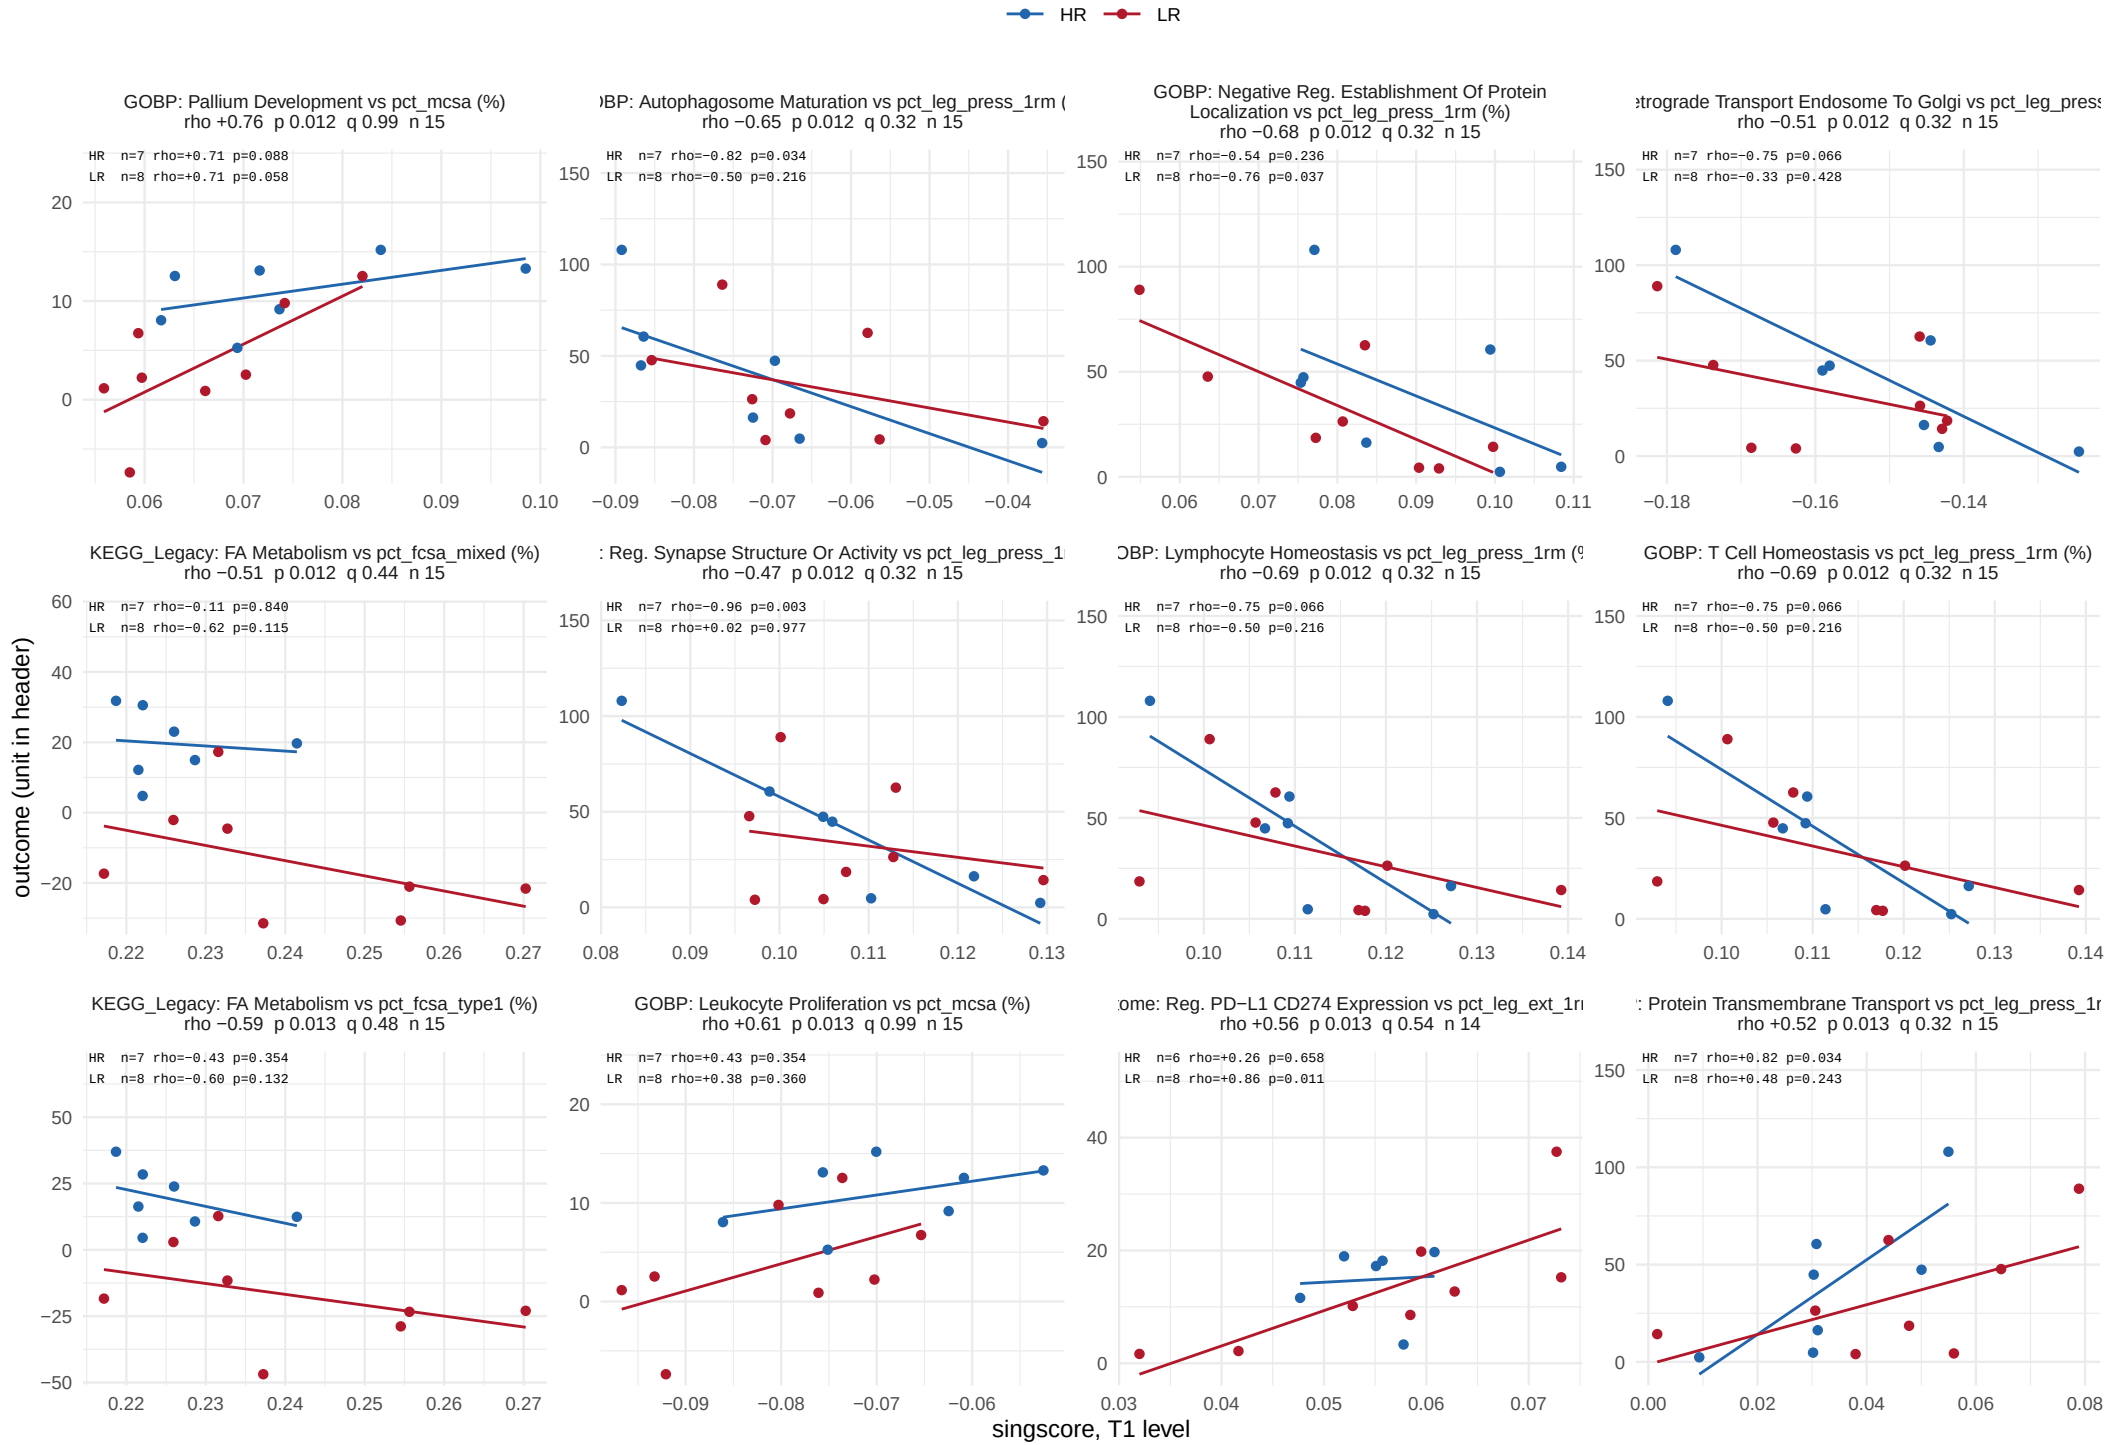

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


418 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 9 of 35.

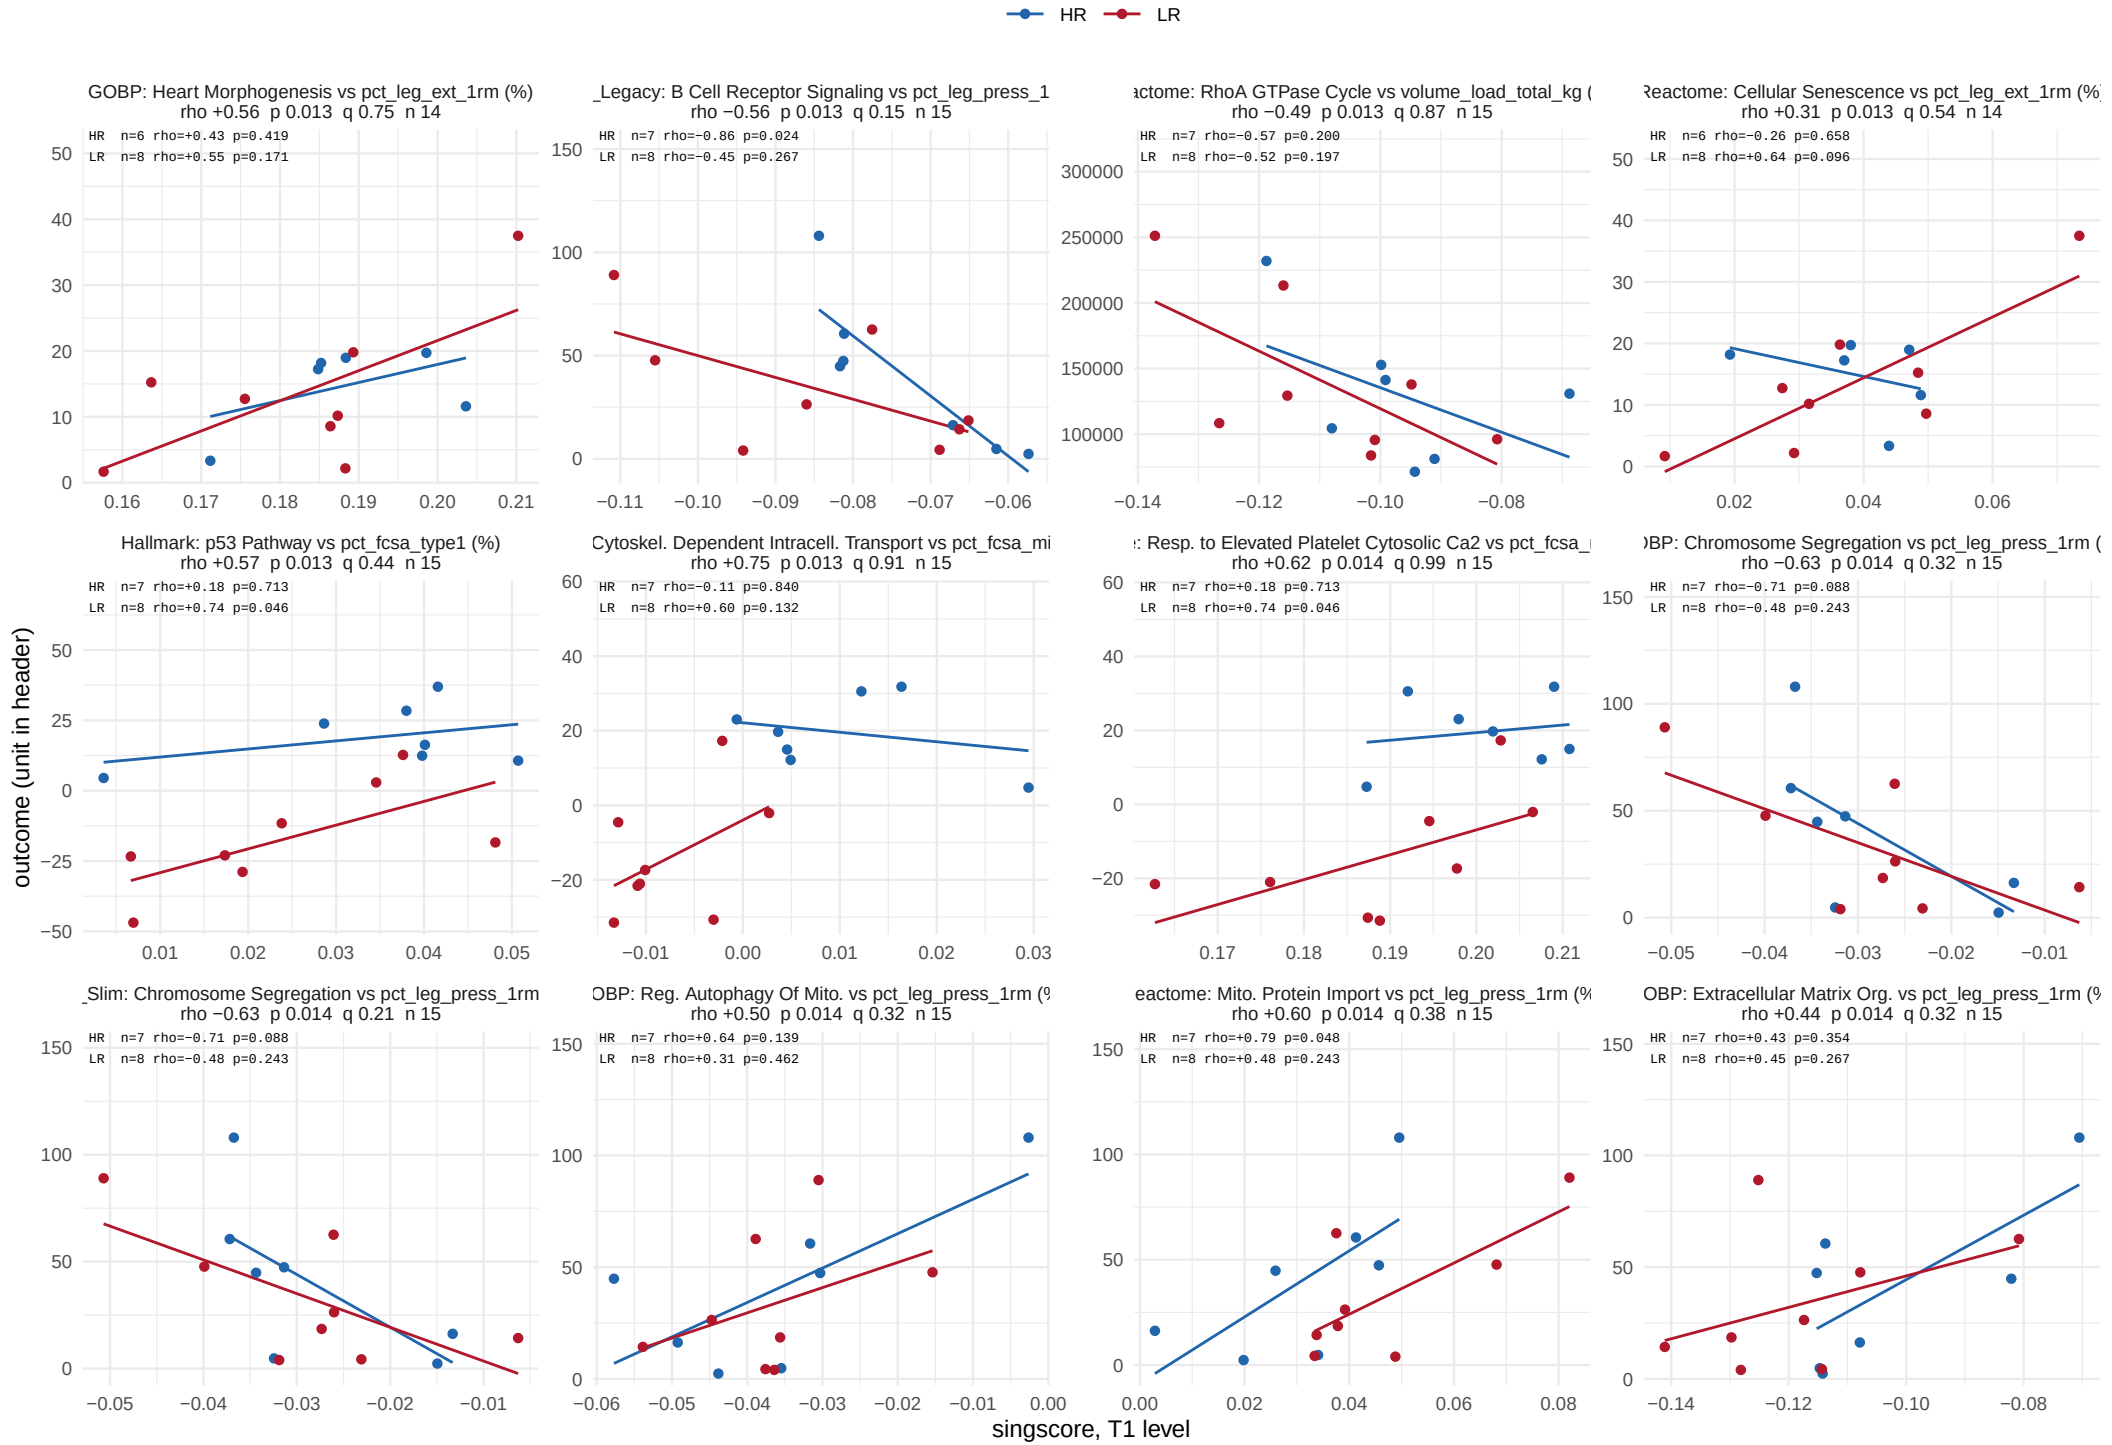

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


418 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 10 of 35.

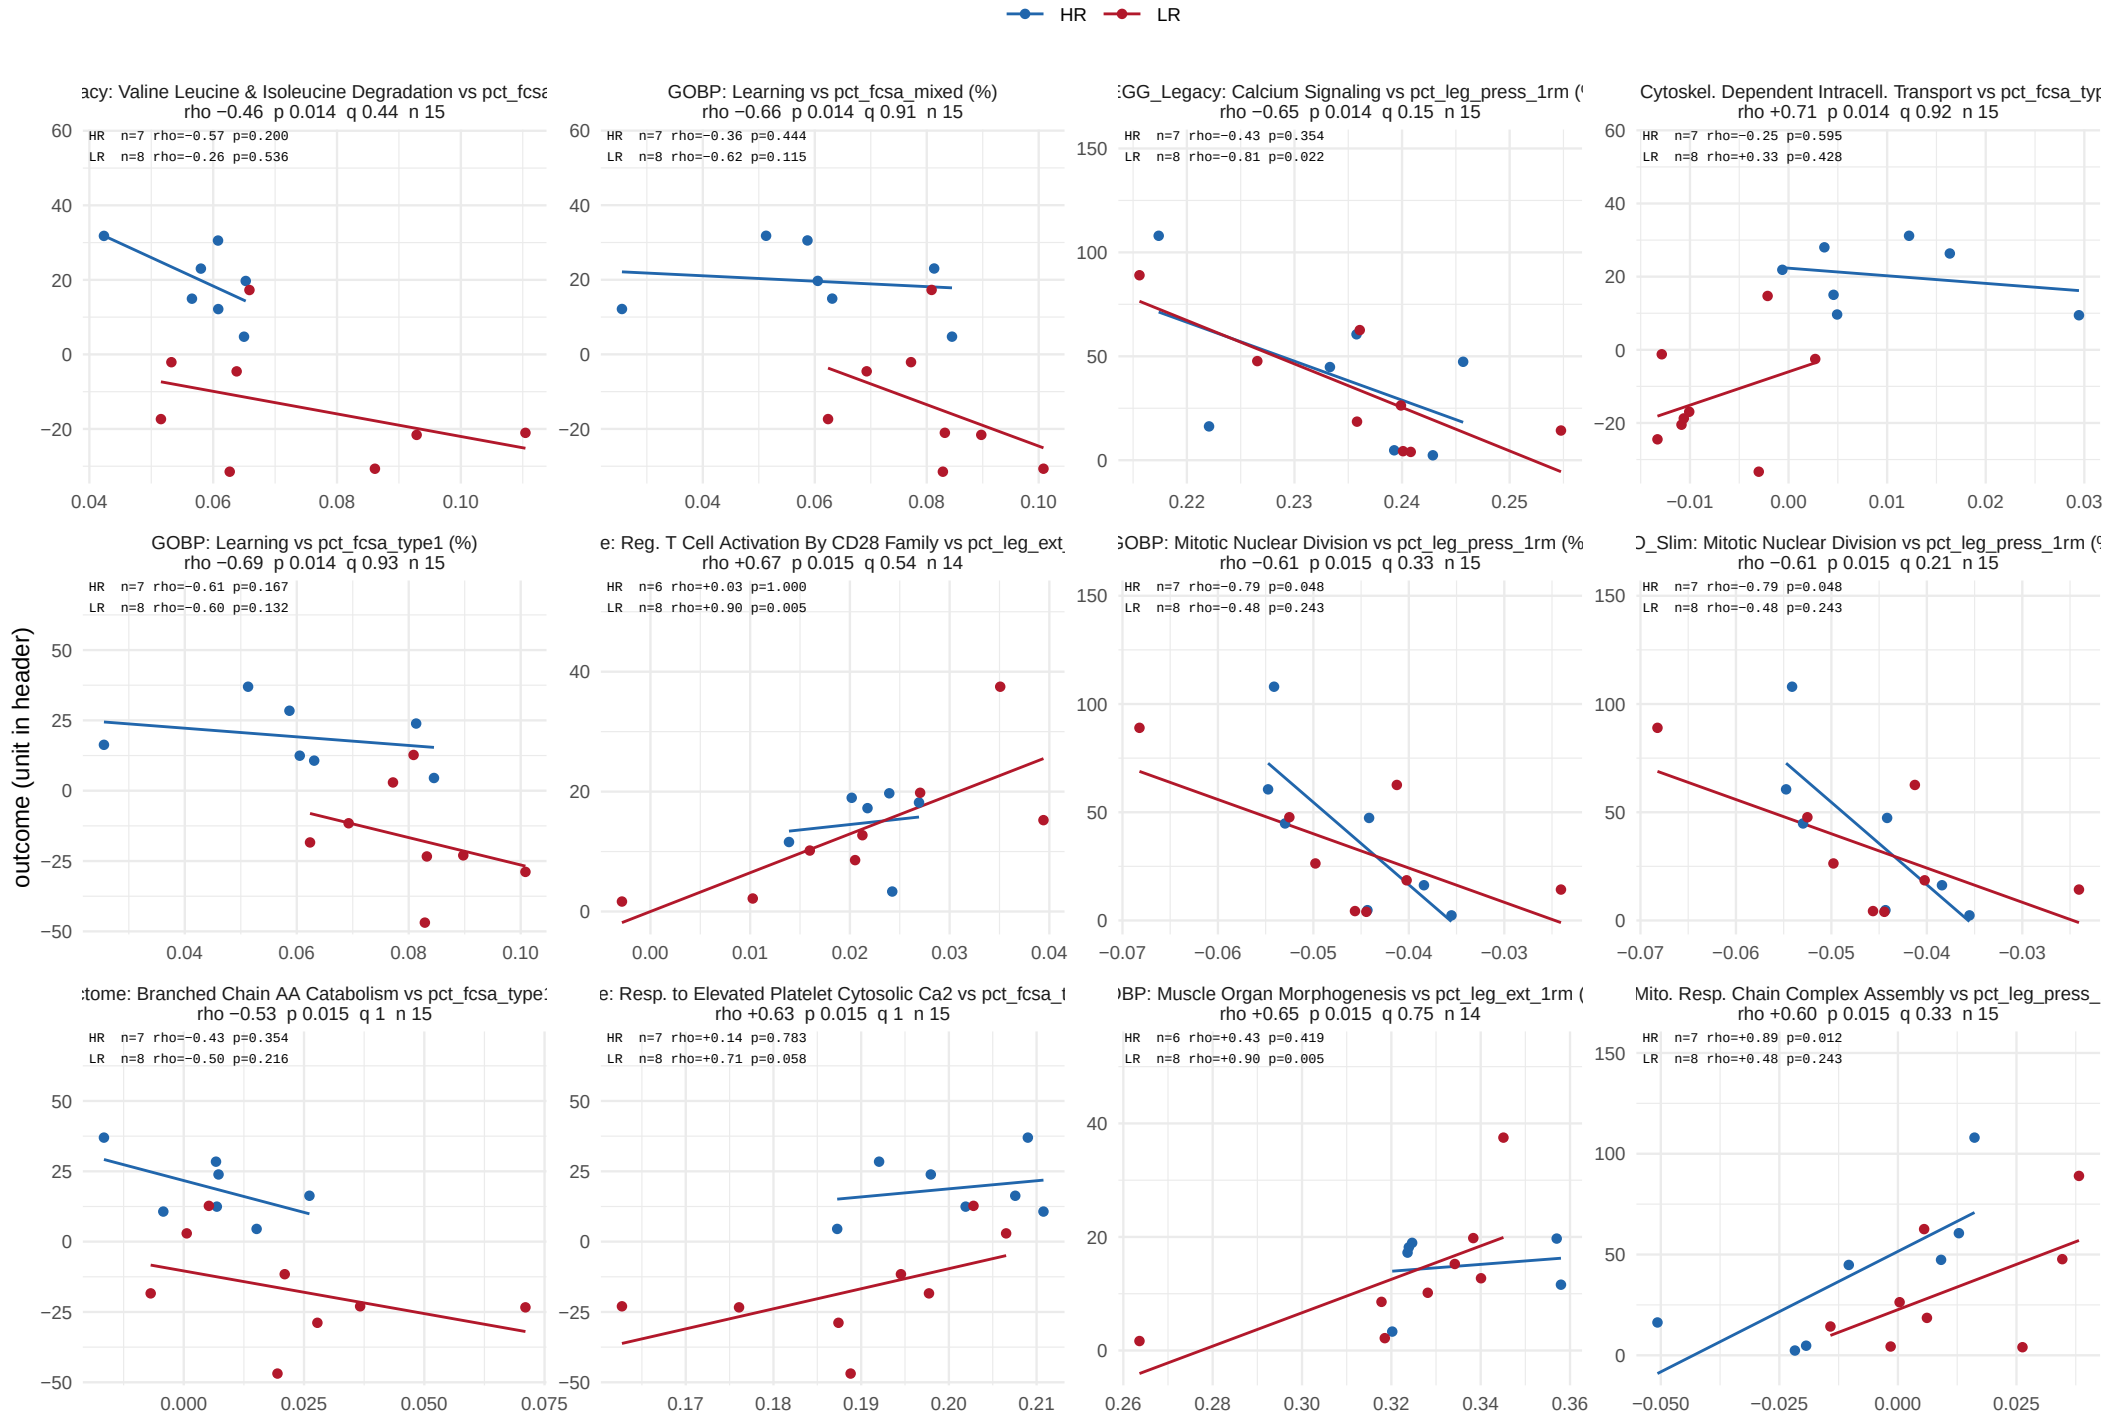

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


418 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 11 of 35.

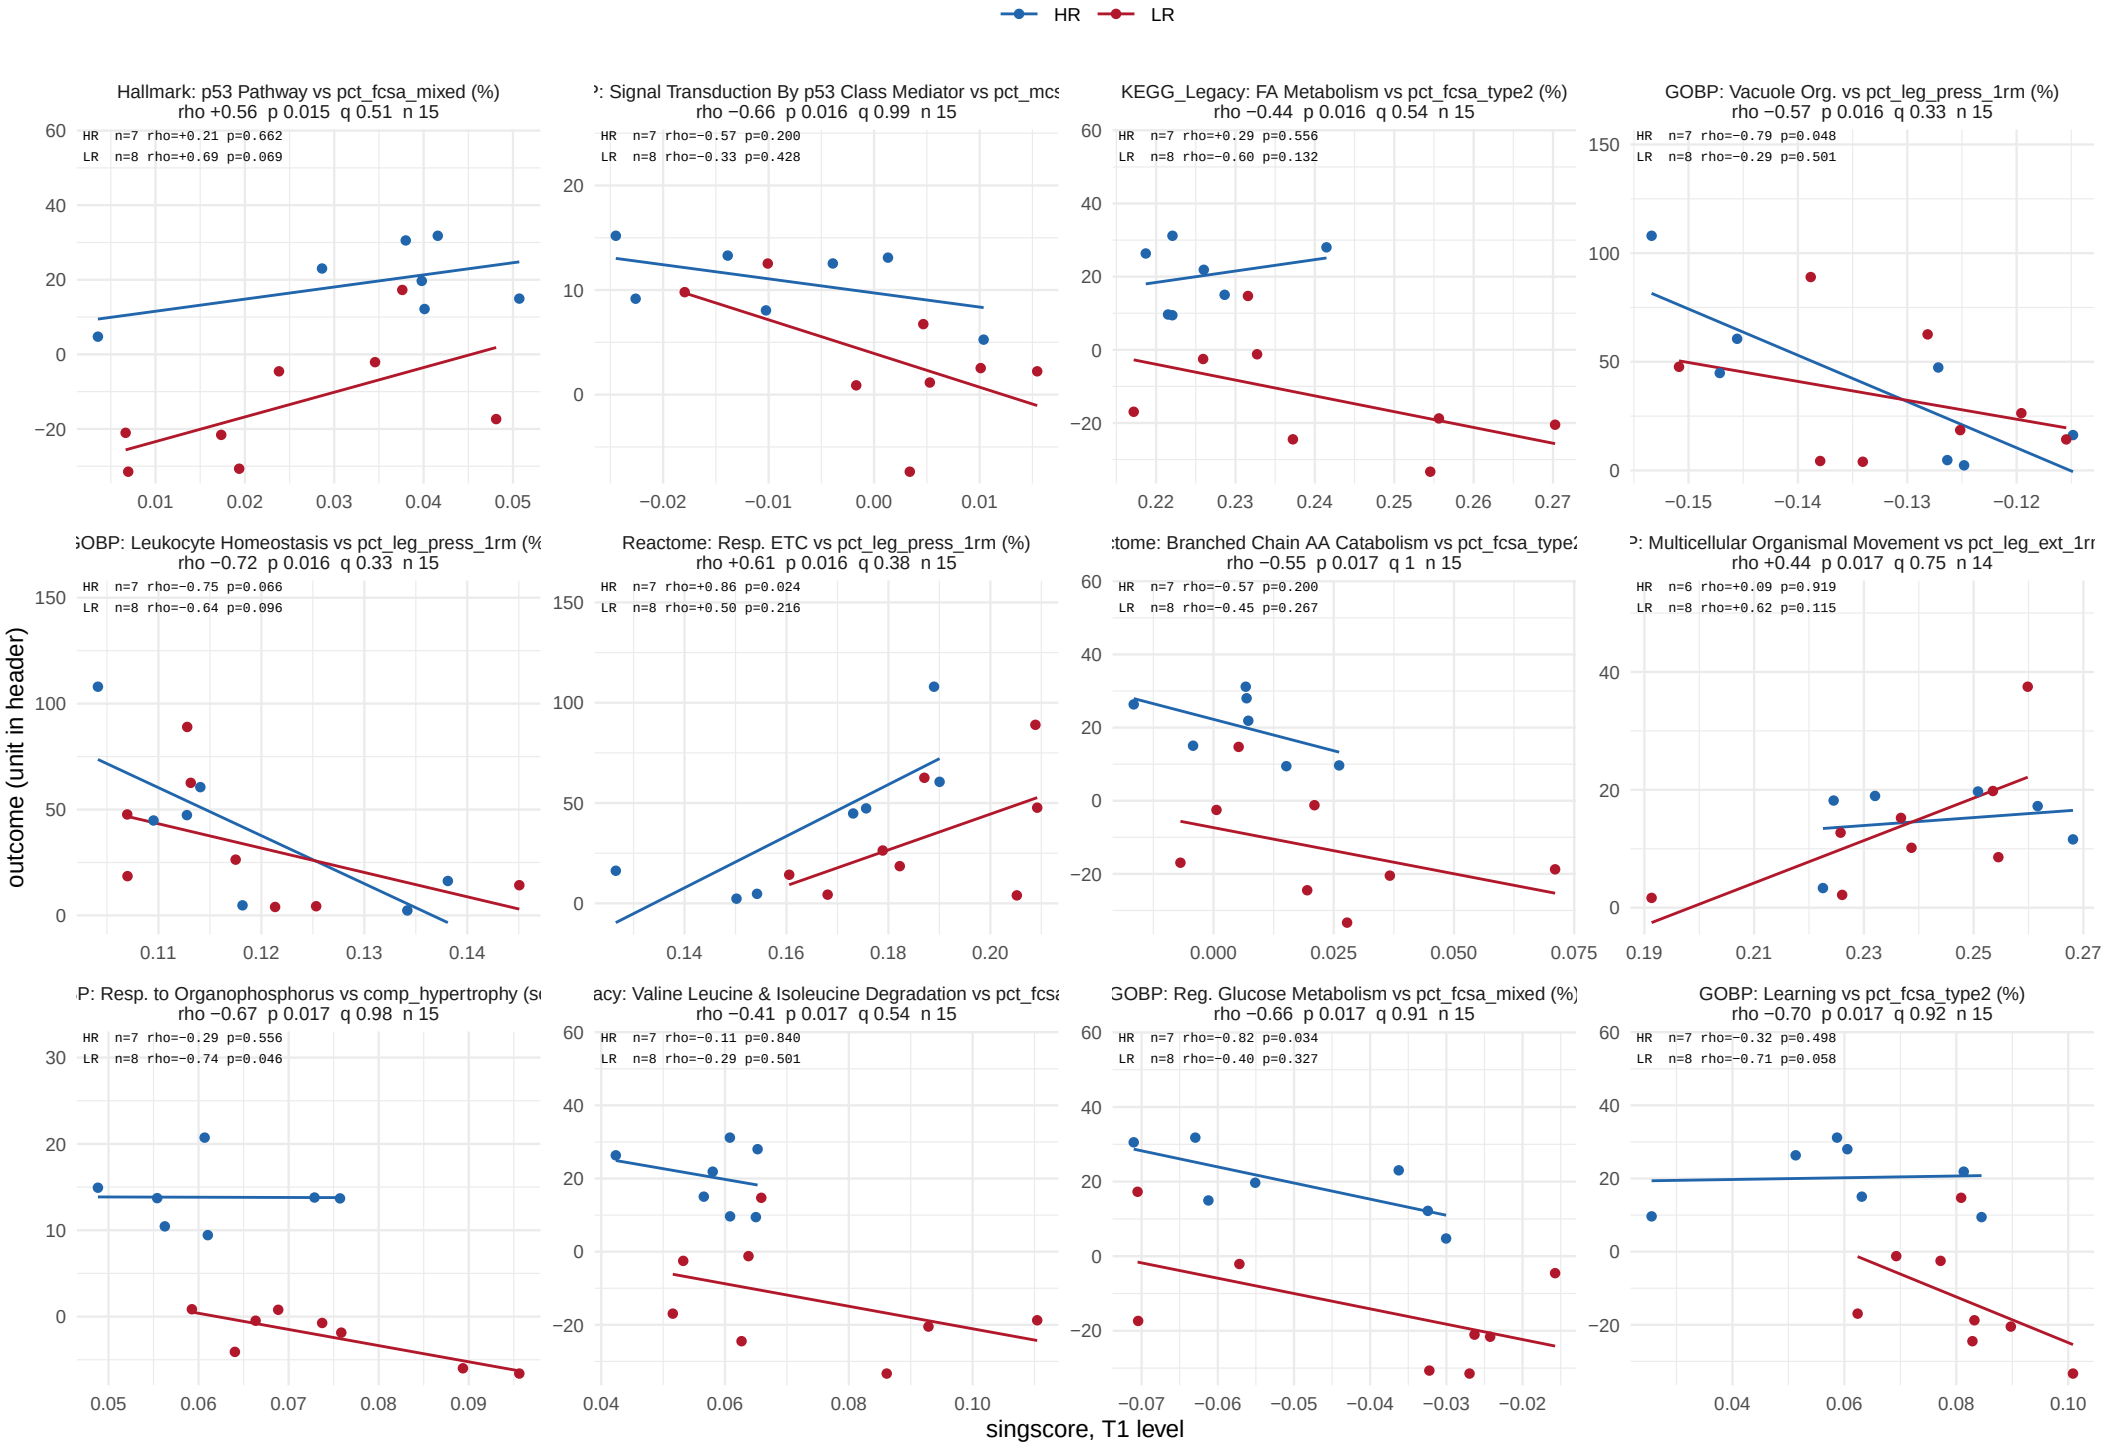

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


418 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 12 of 35.

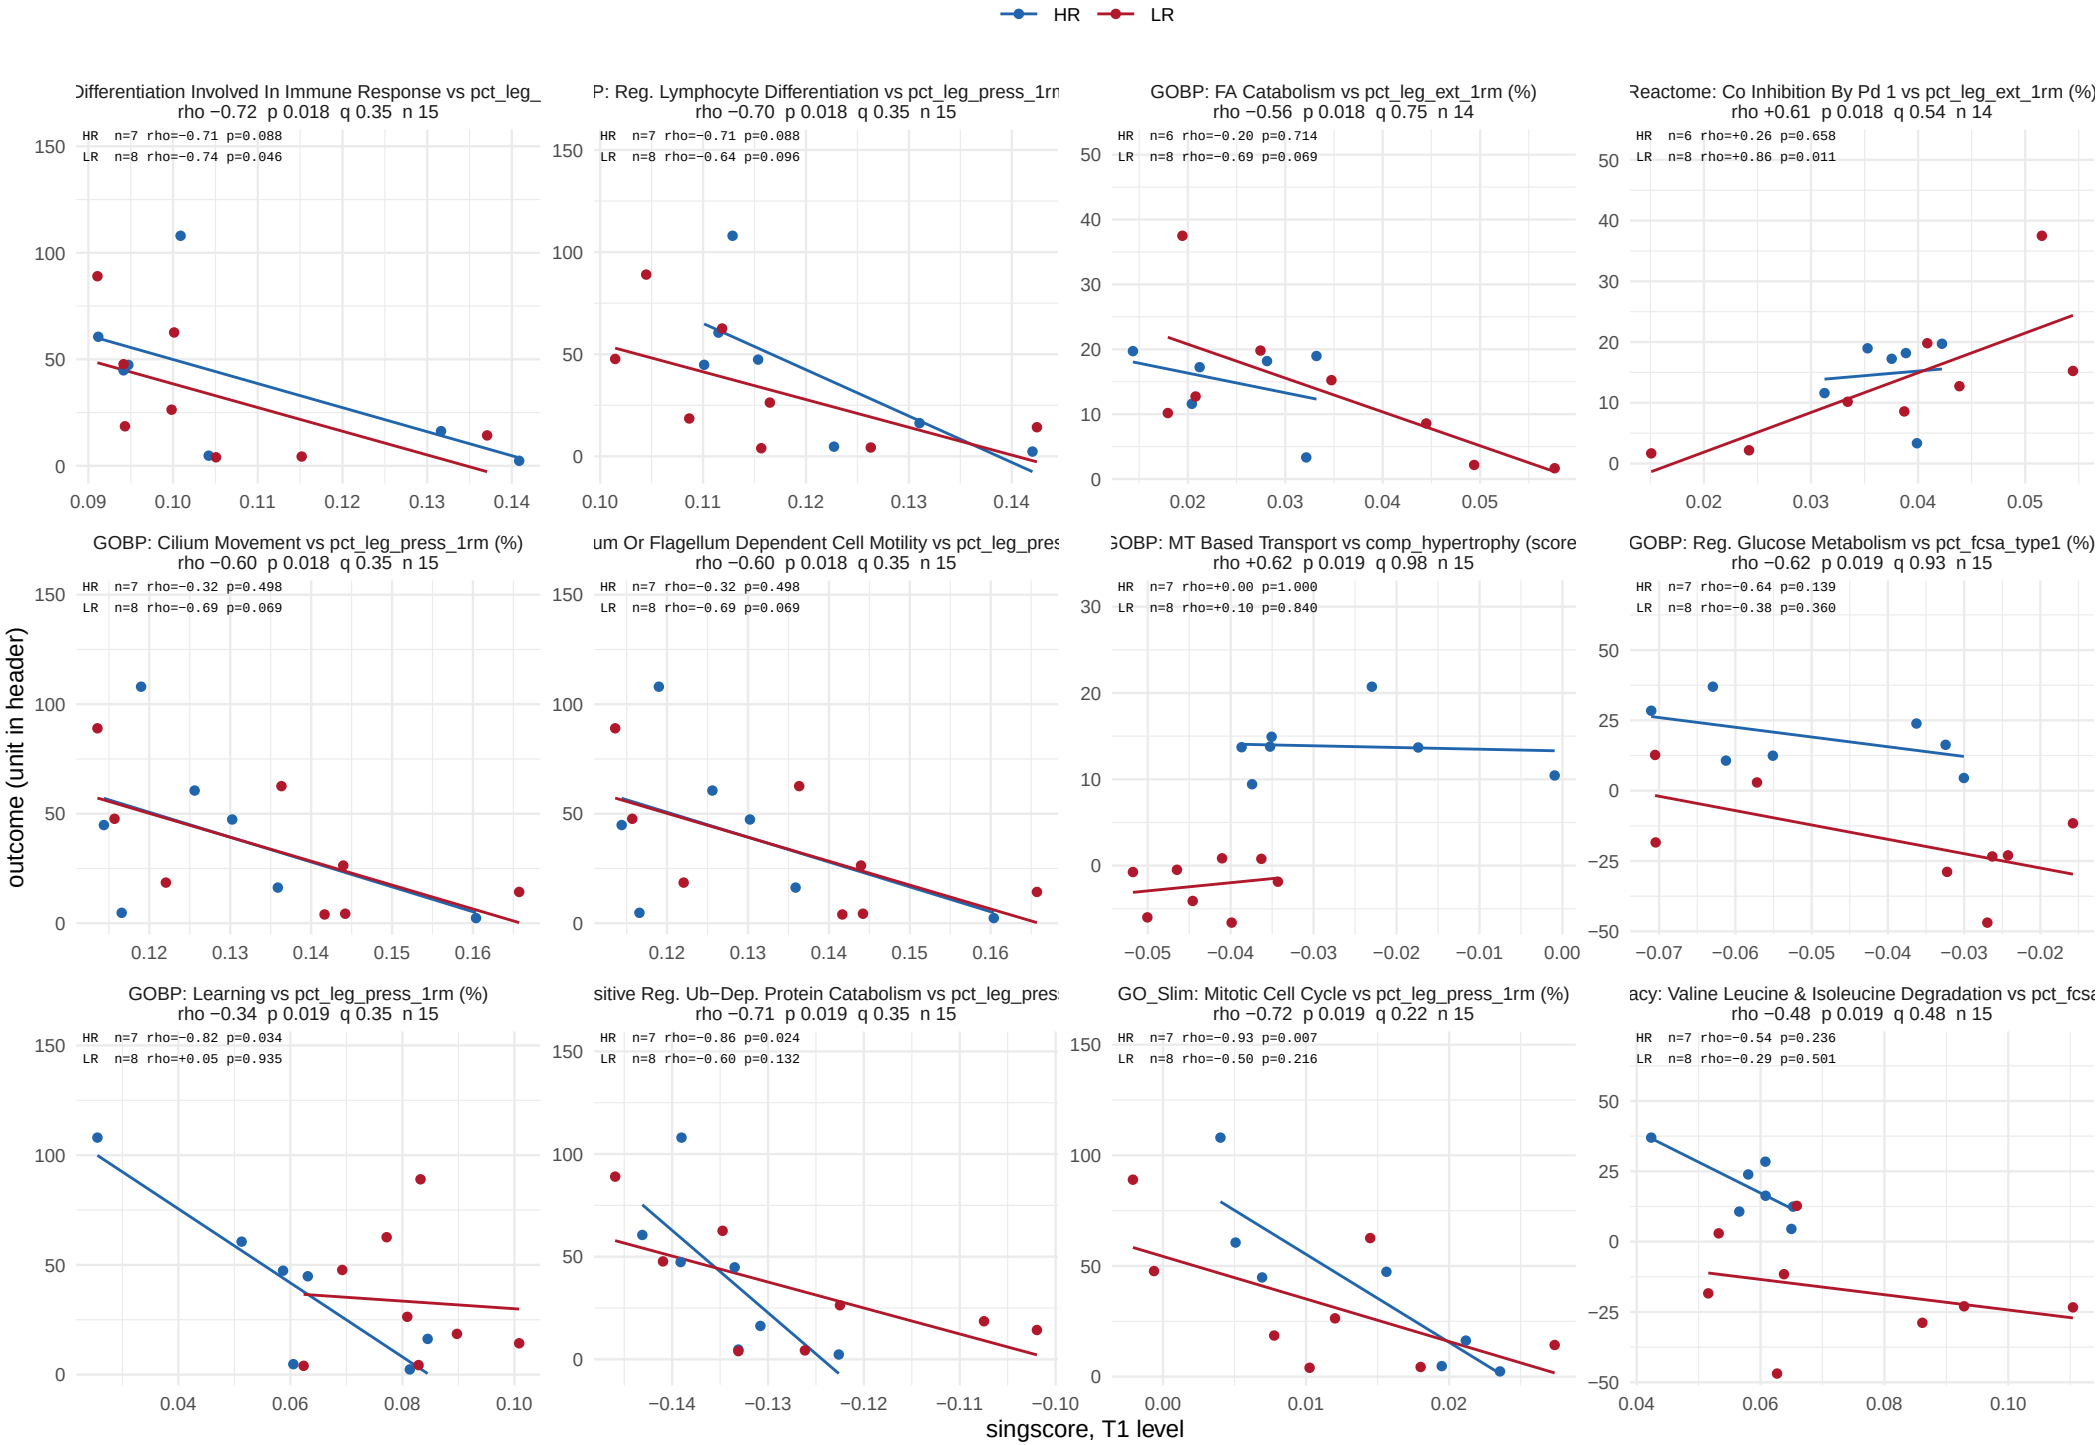

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


418 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 13 of 35.

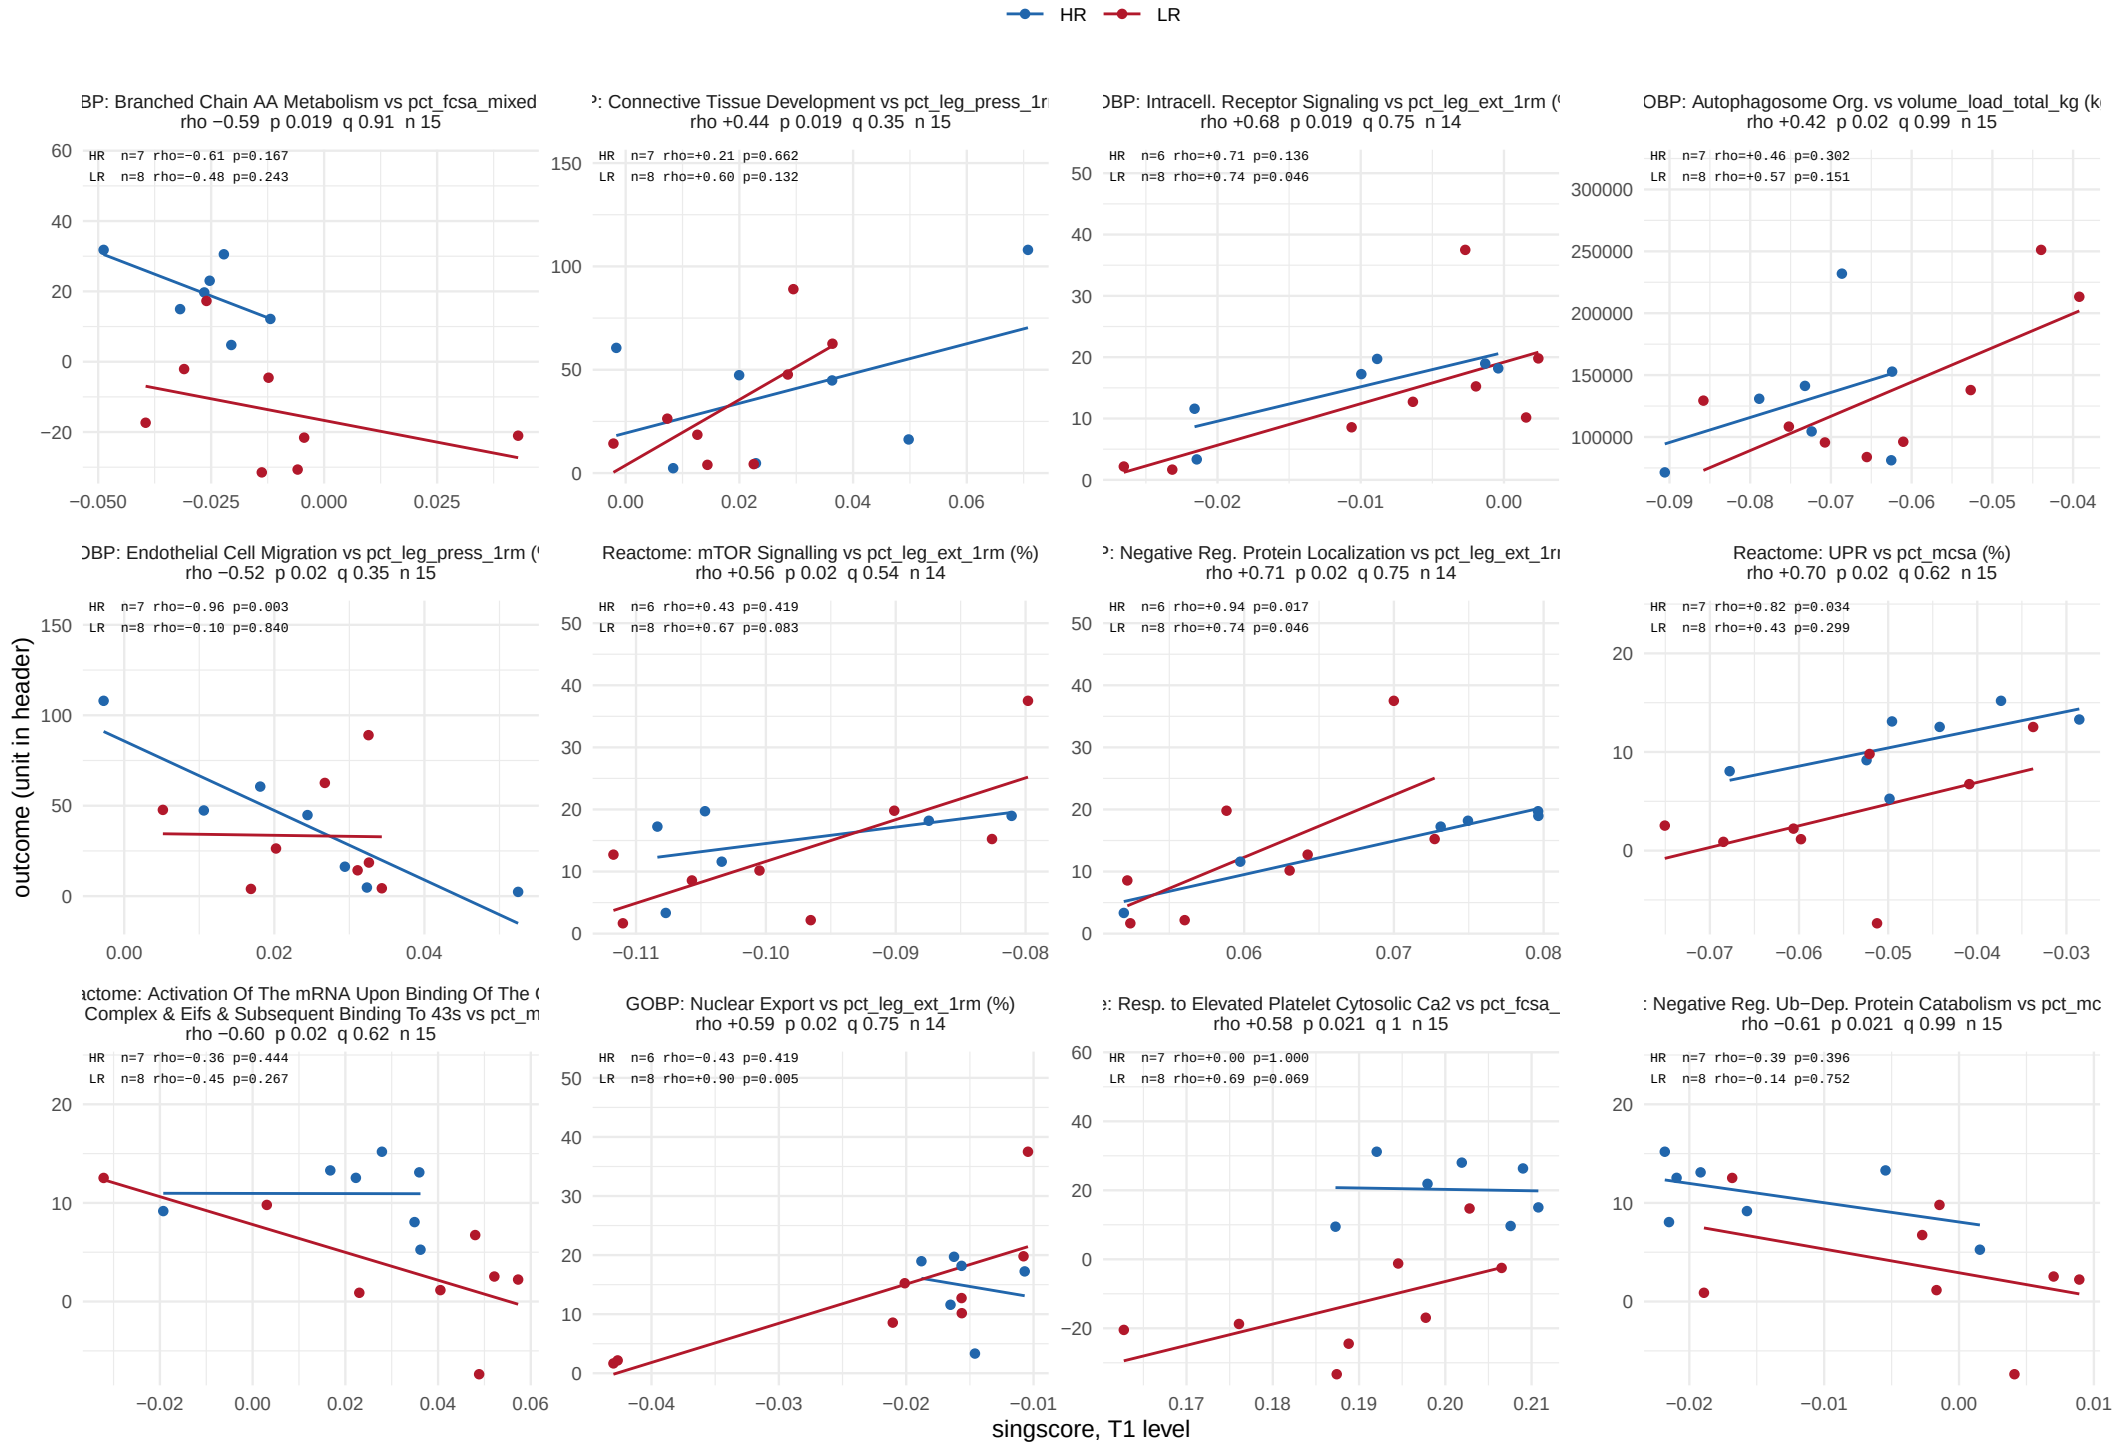

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


418 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 14 of 35.

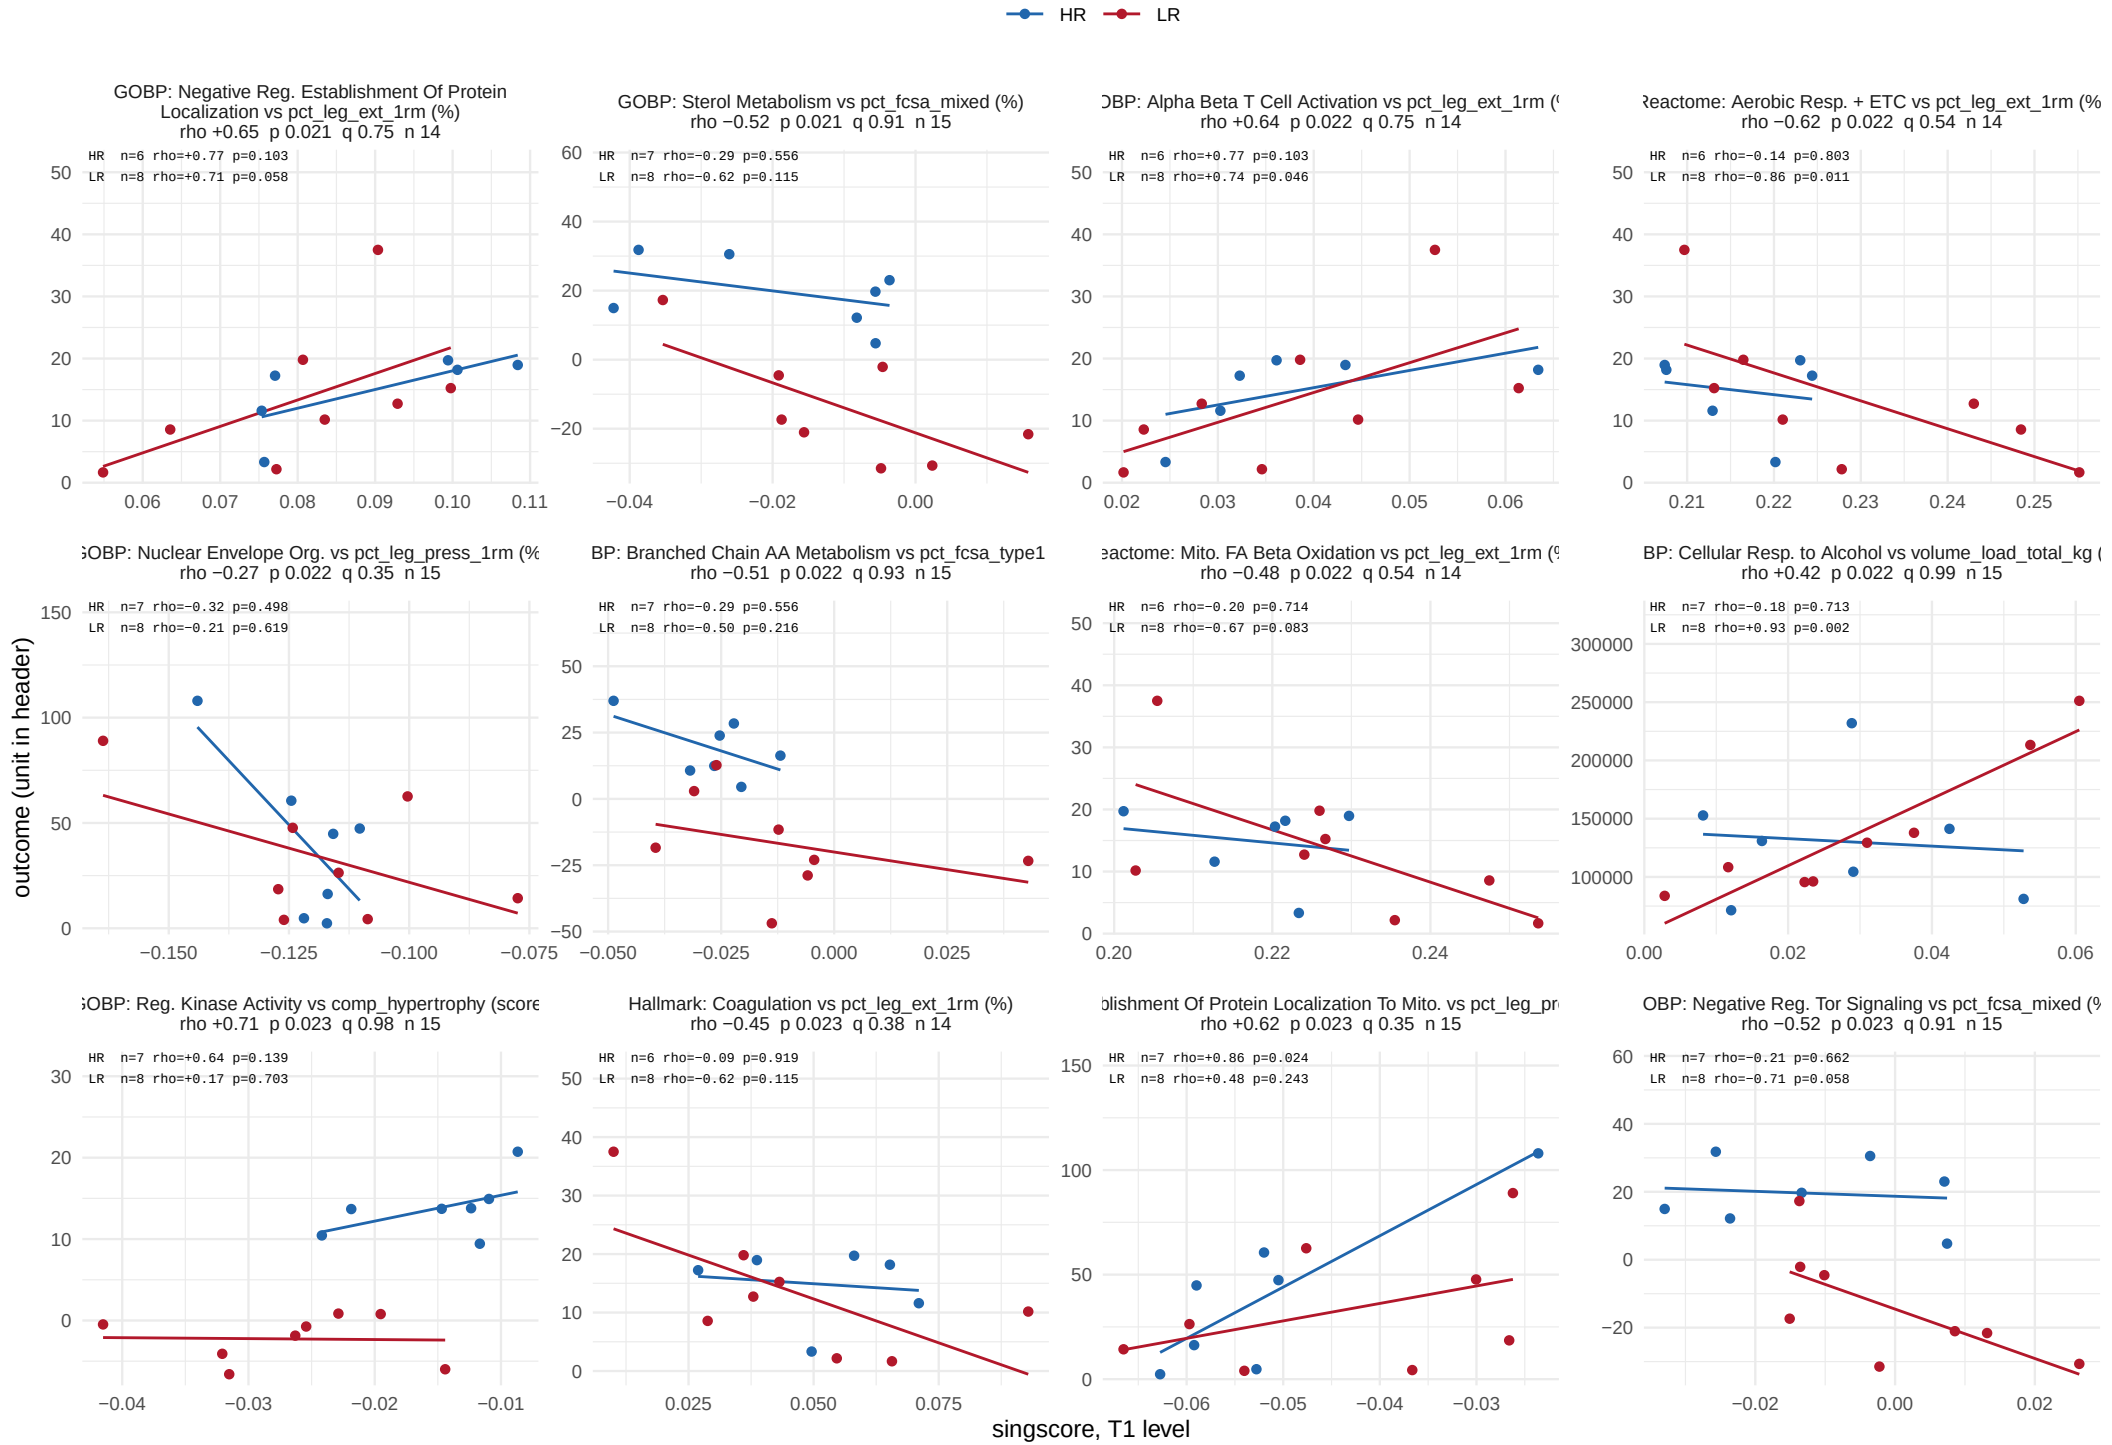

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


418 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 15 of 35.

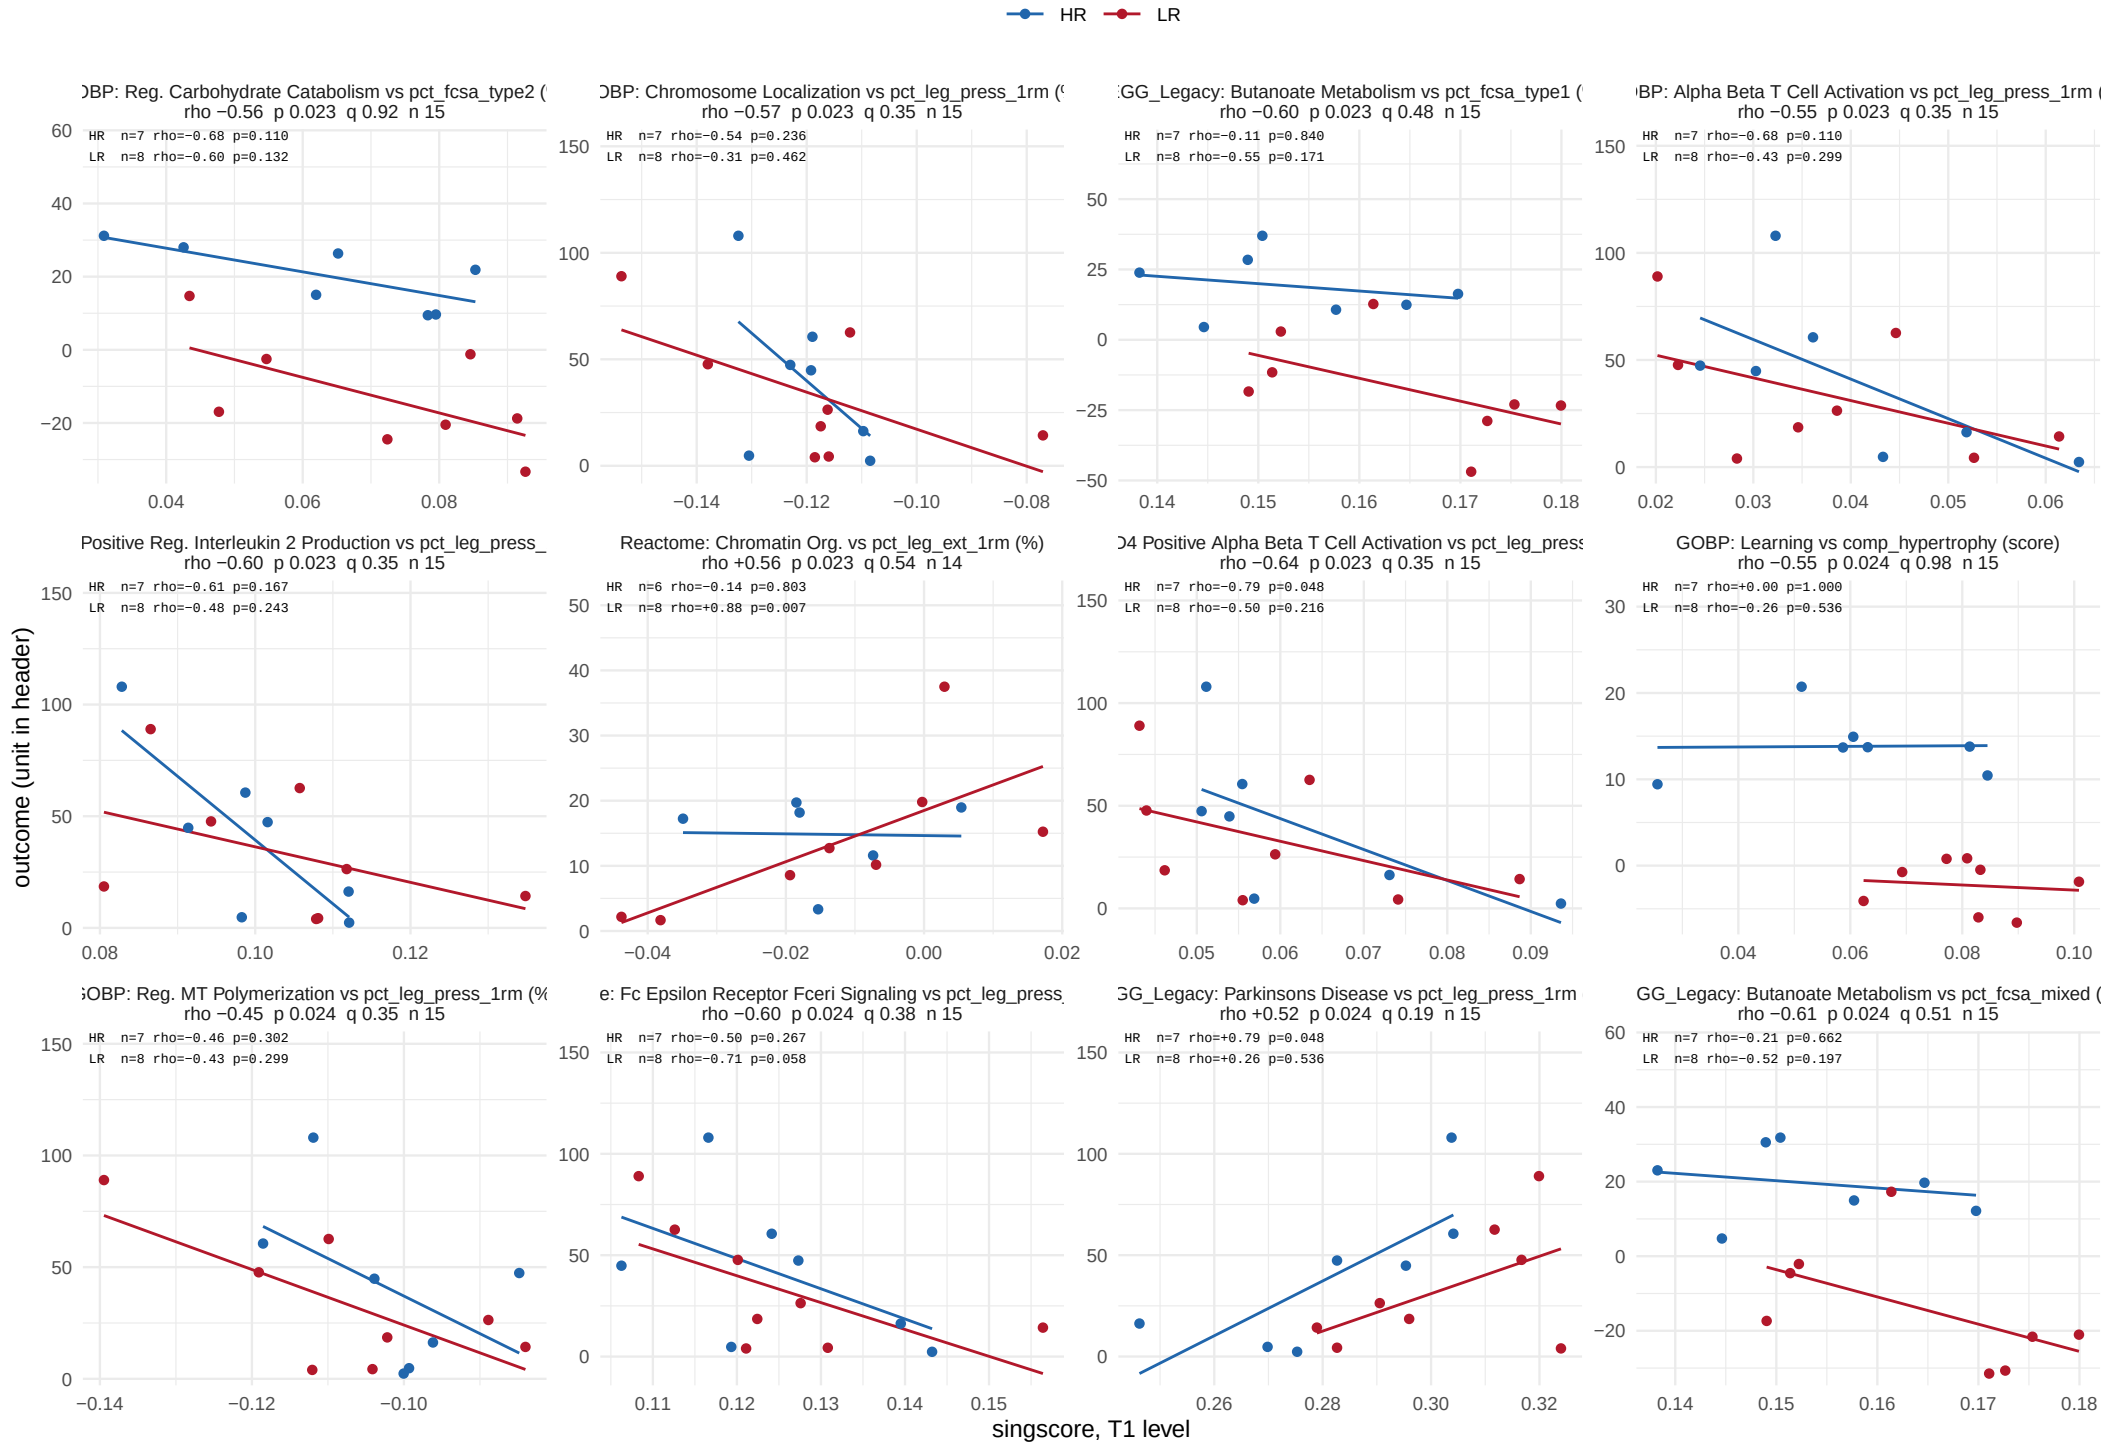

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


418 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 16 of 35.

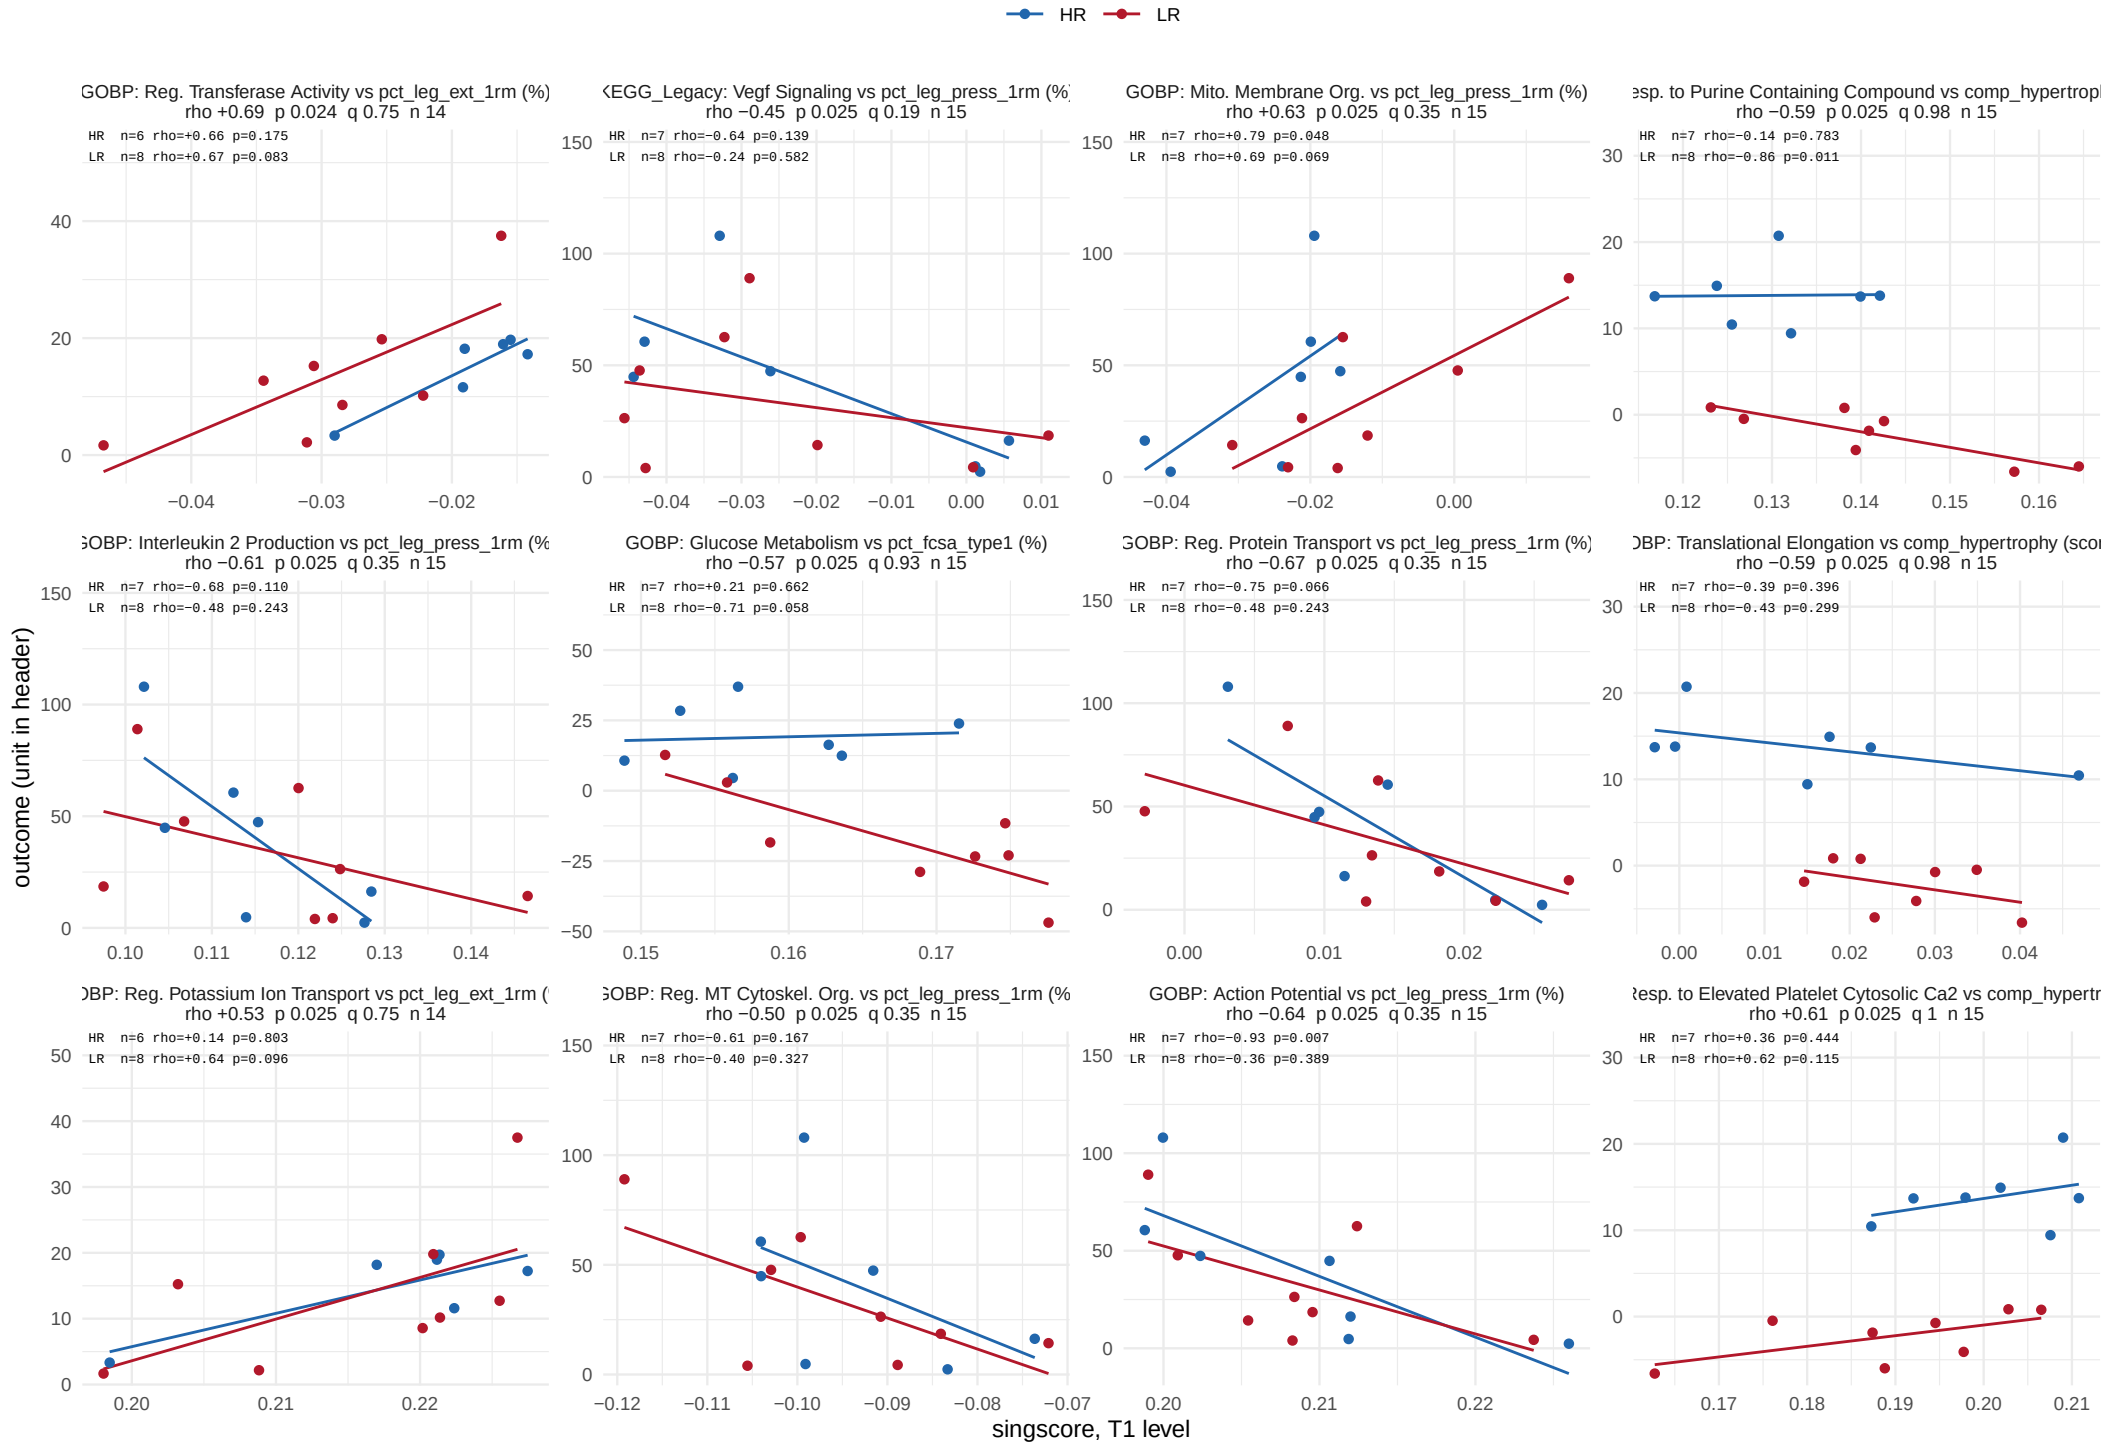

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


418 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 17 of 35.

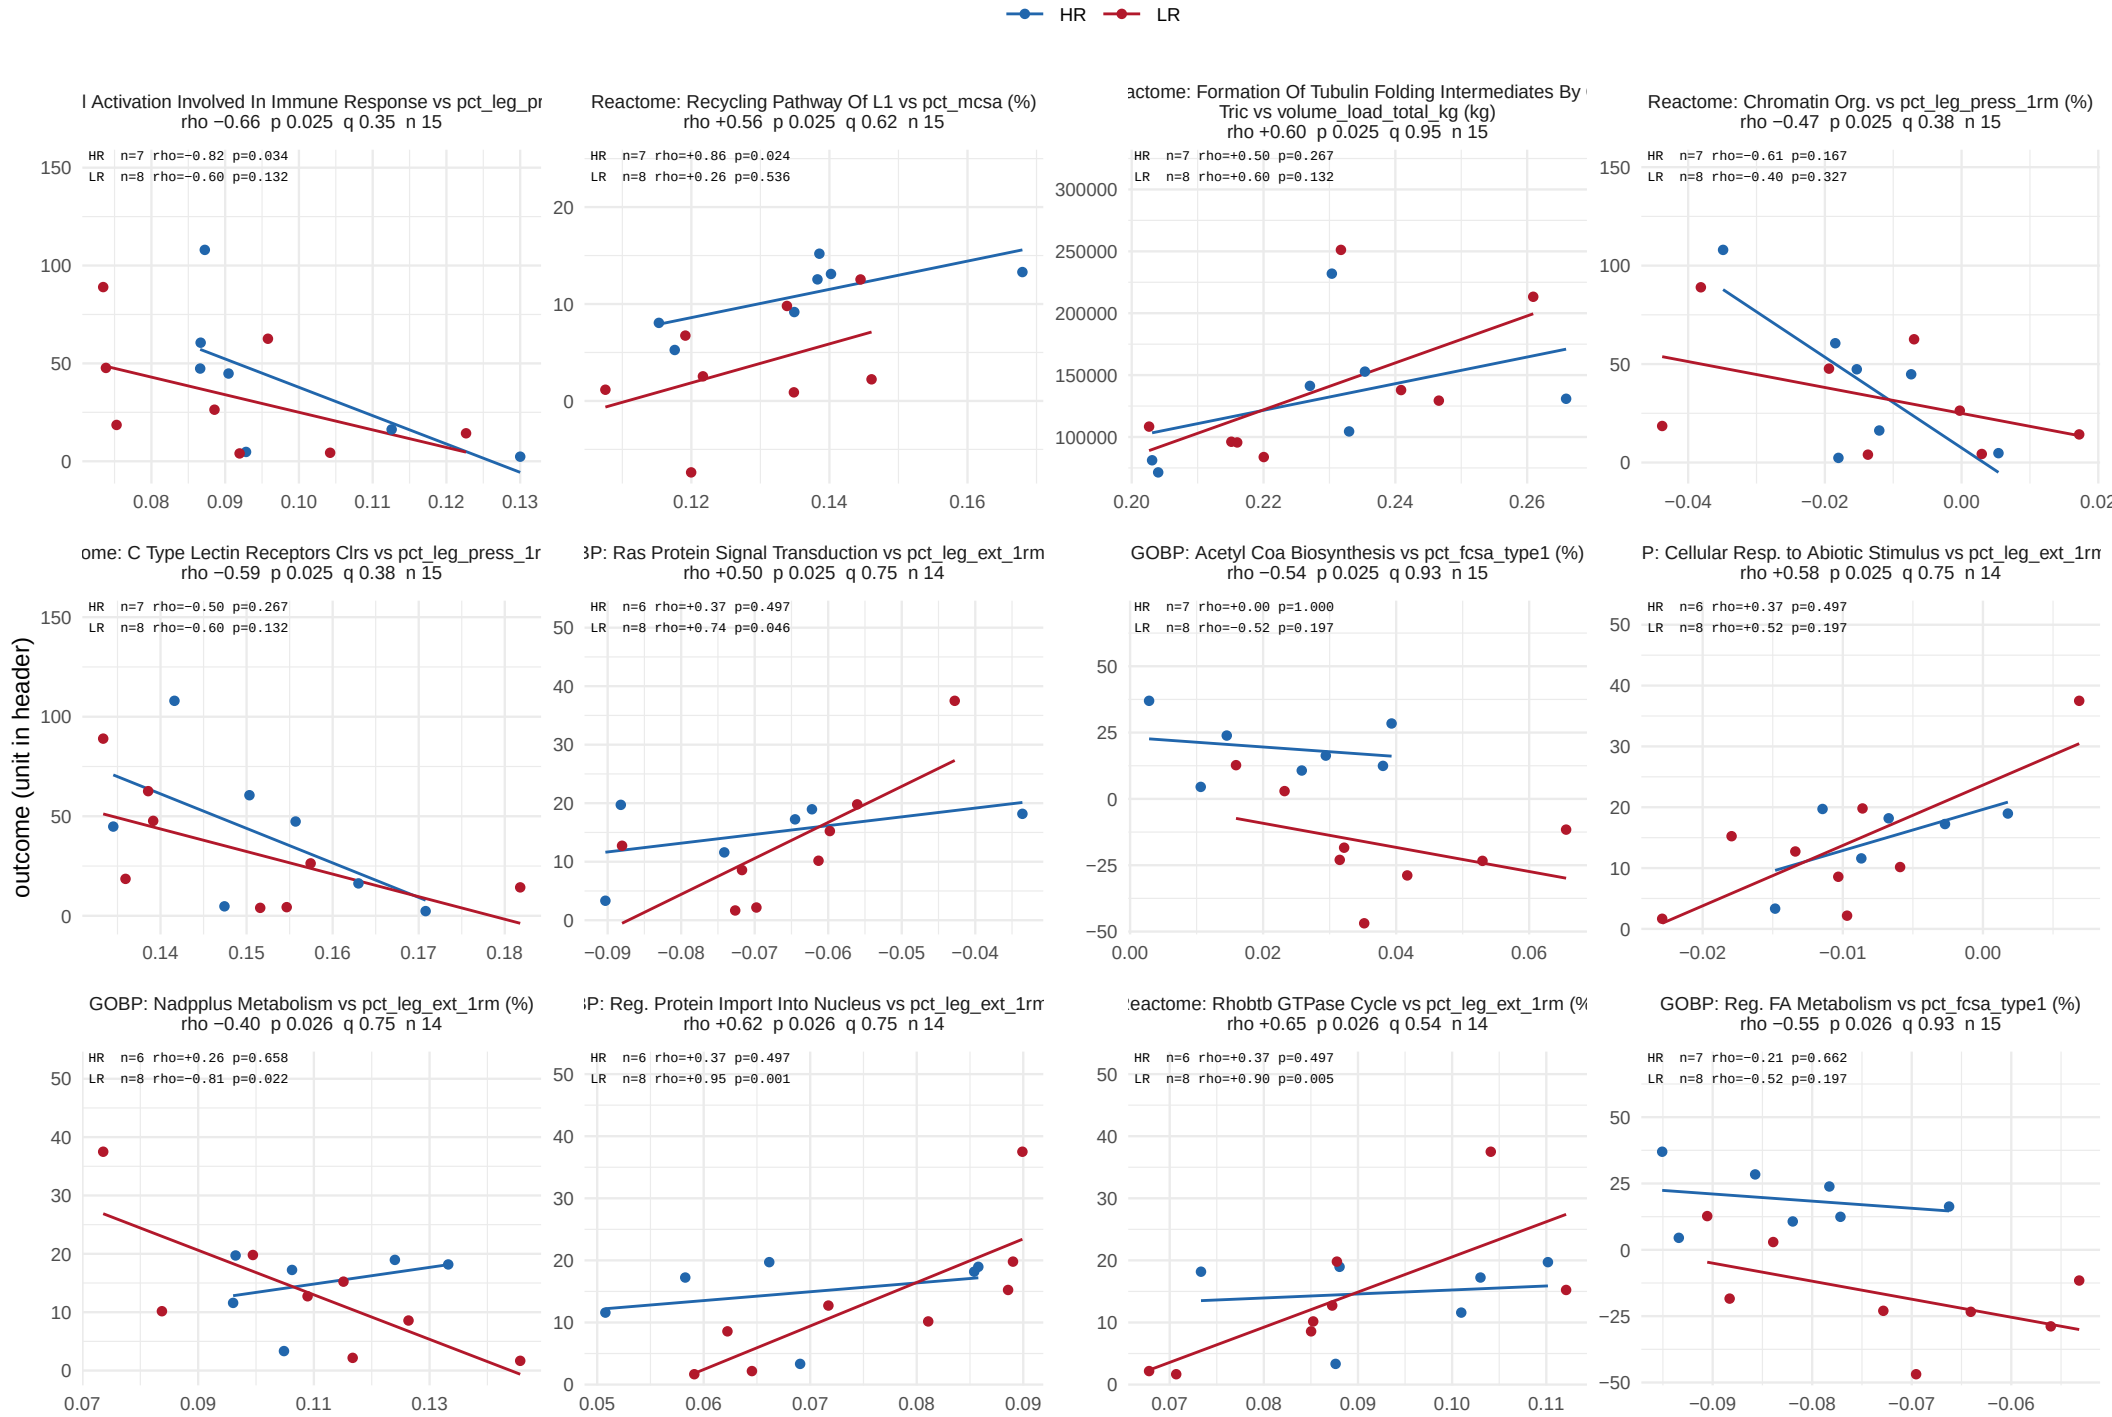

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


418 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 18 of 35.

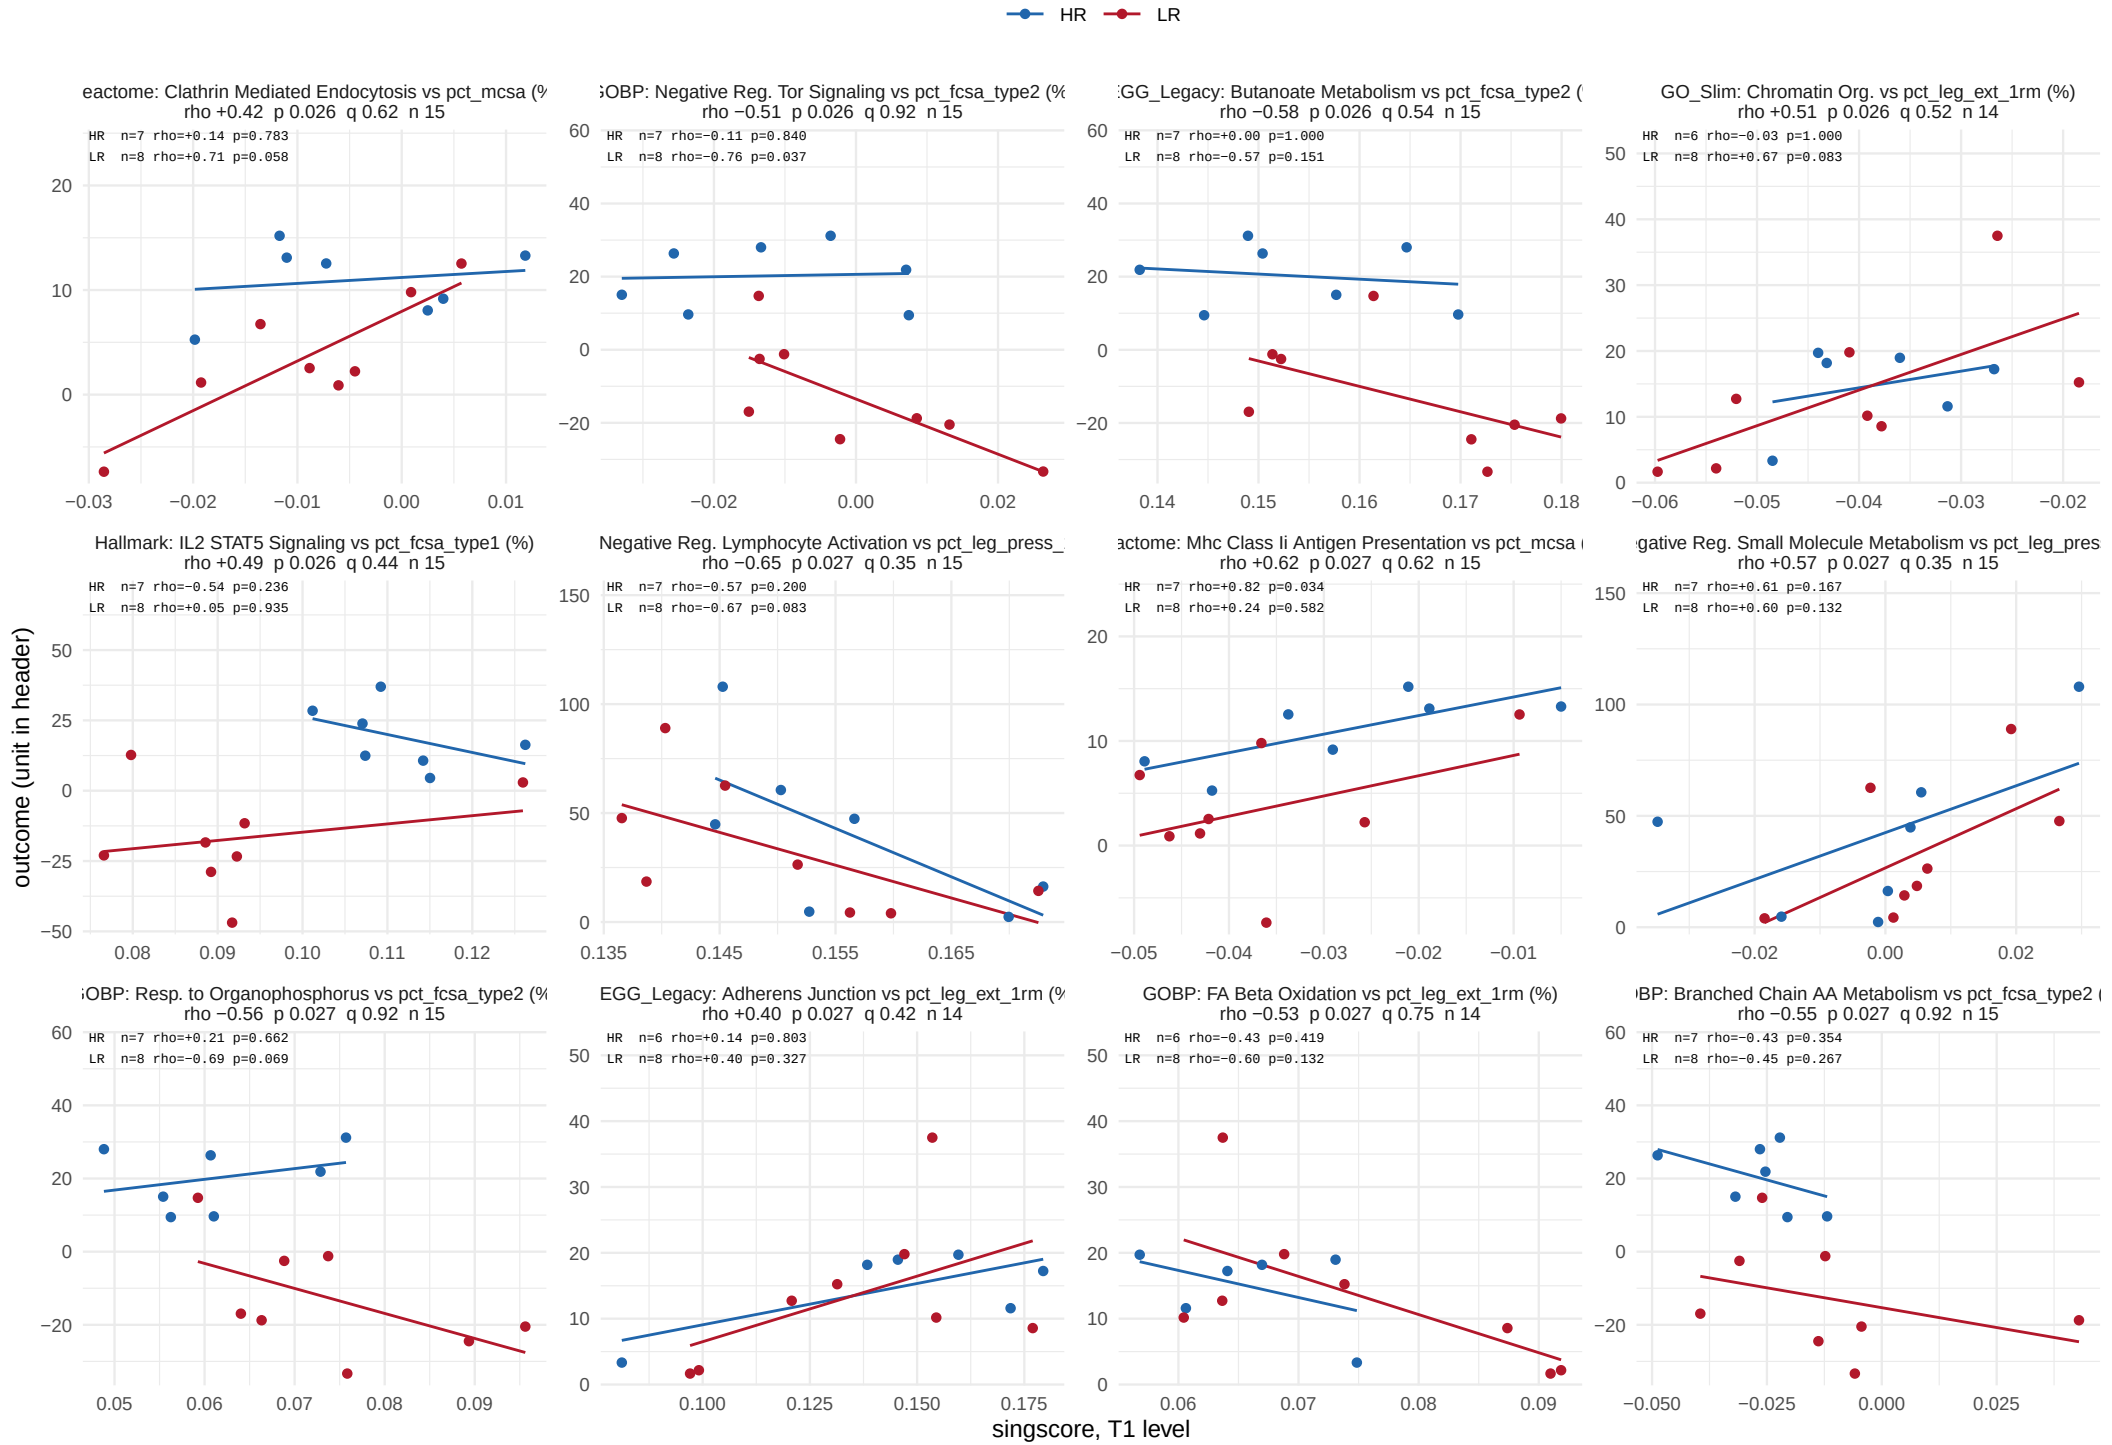

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


418 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 19 of 35.

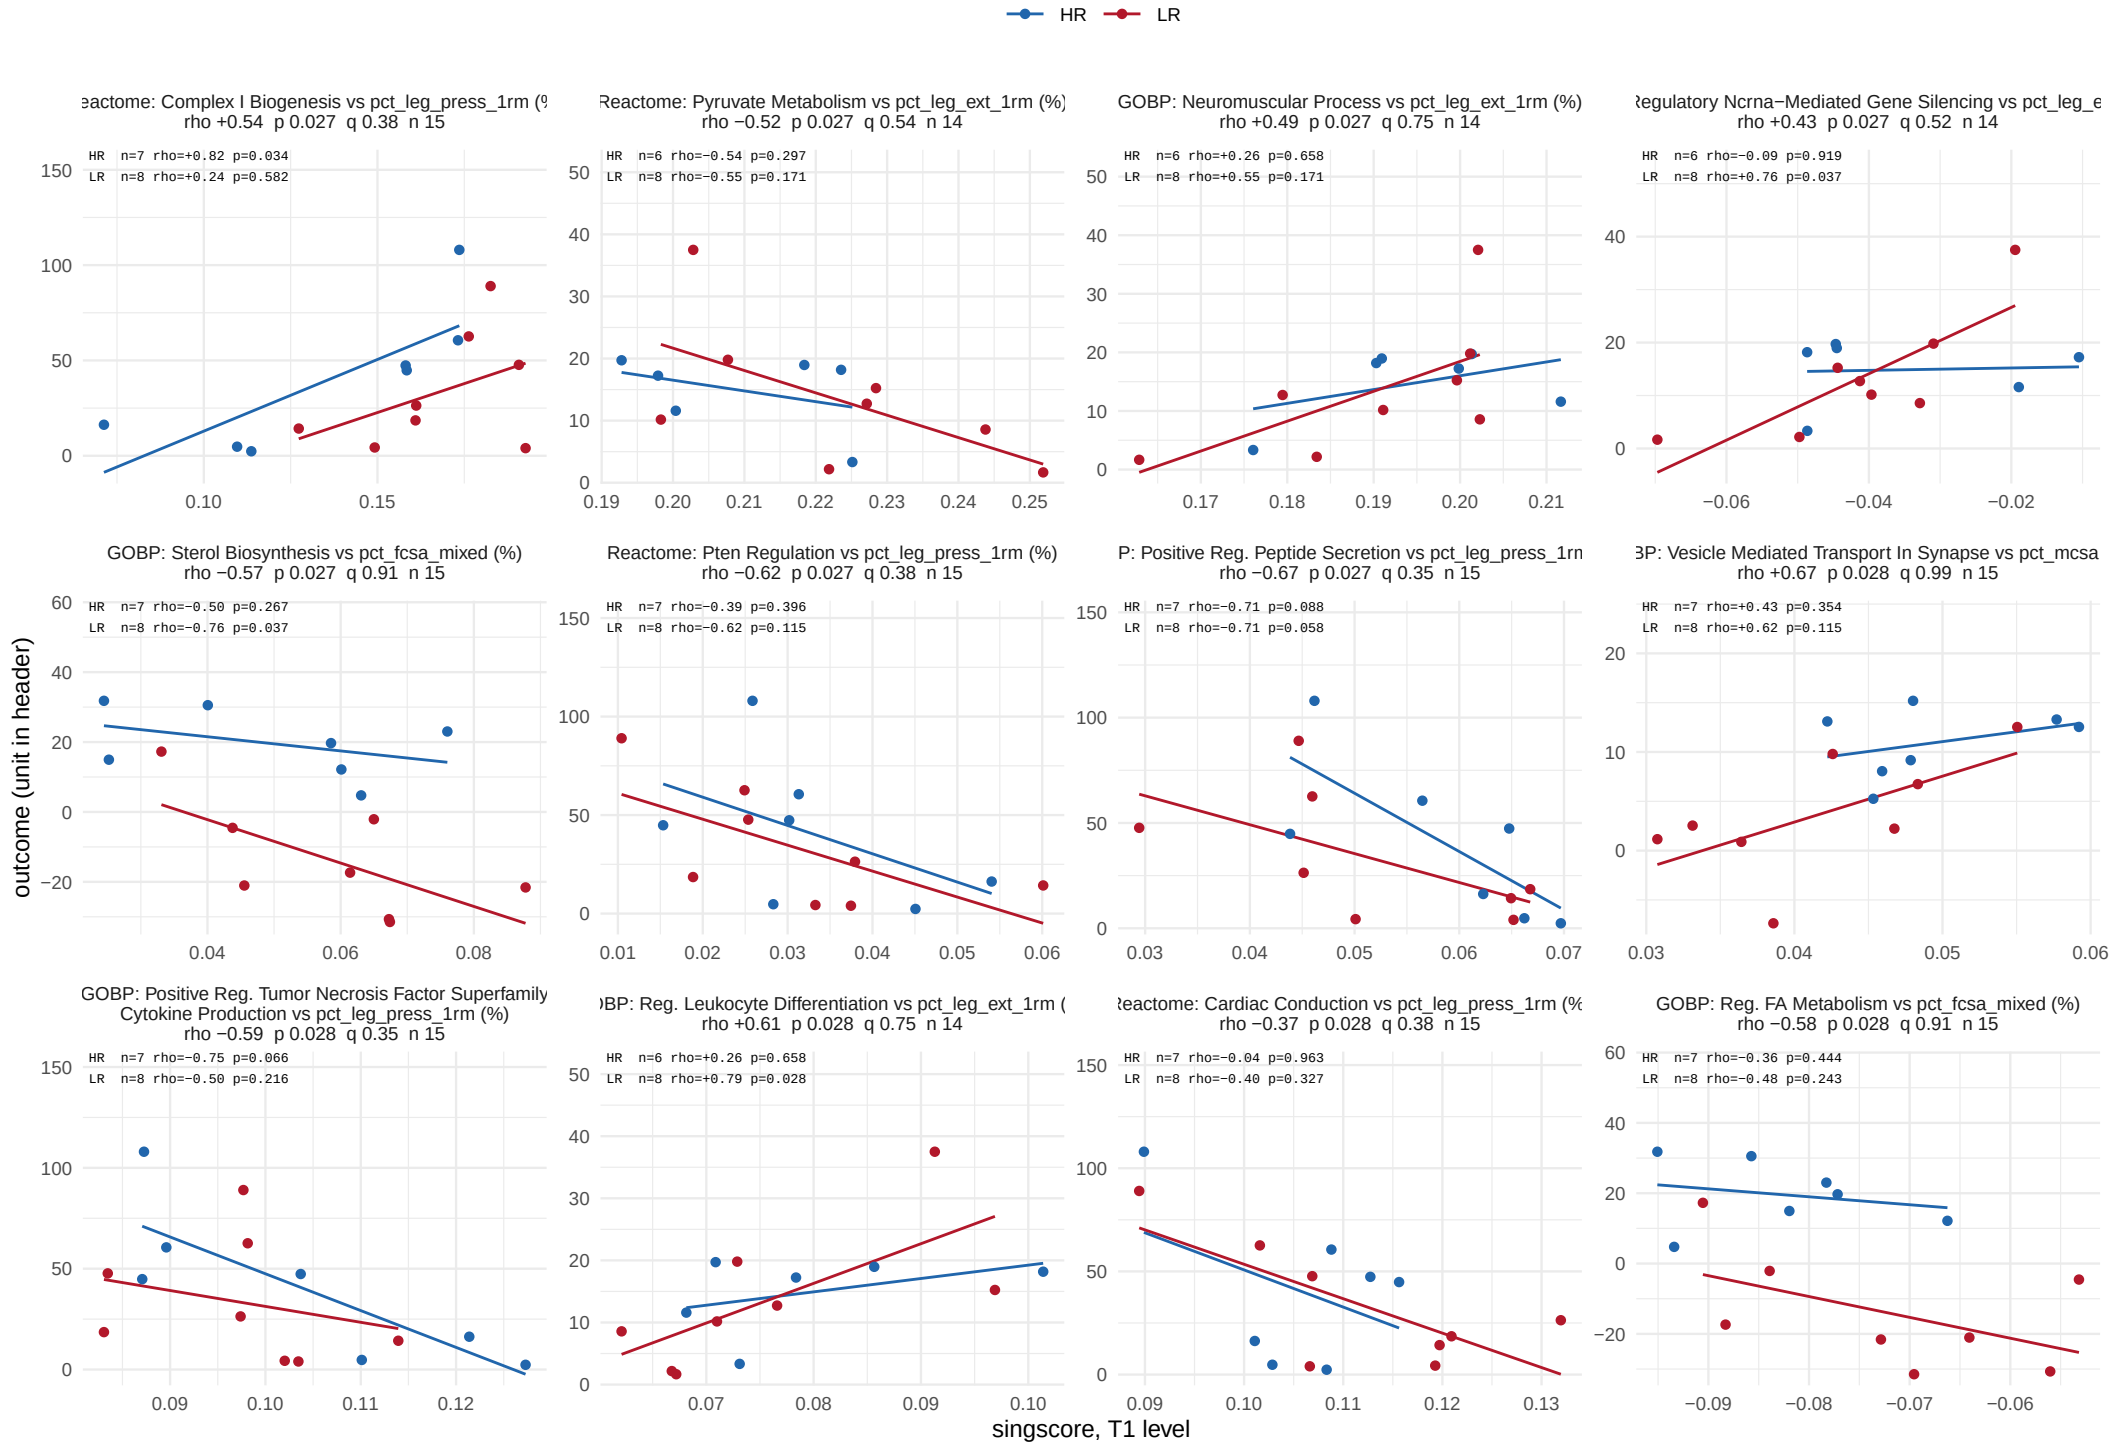

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


418 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 20 of 35.

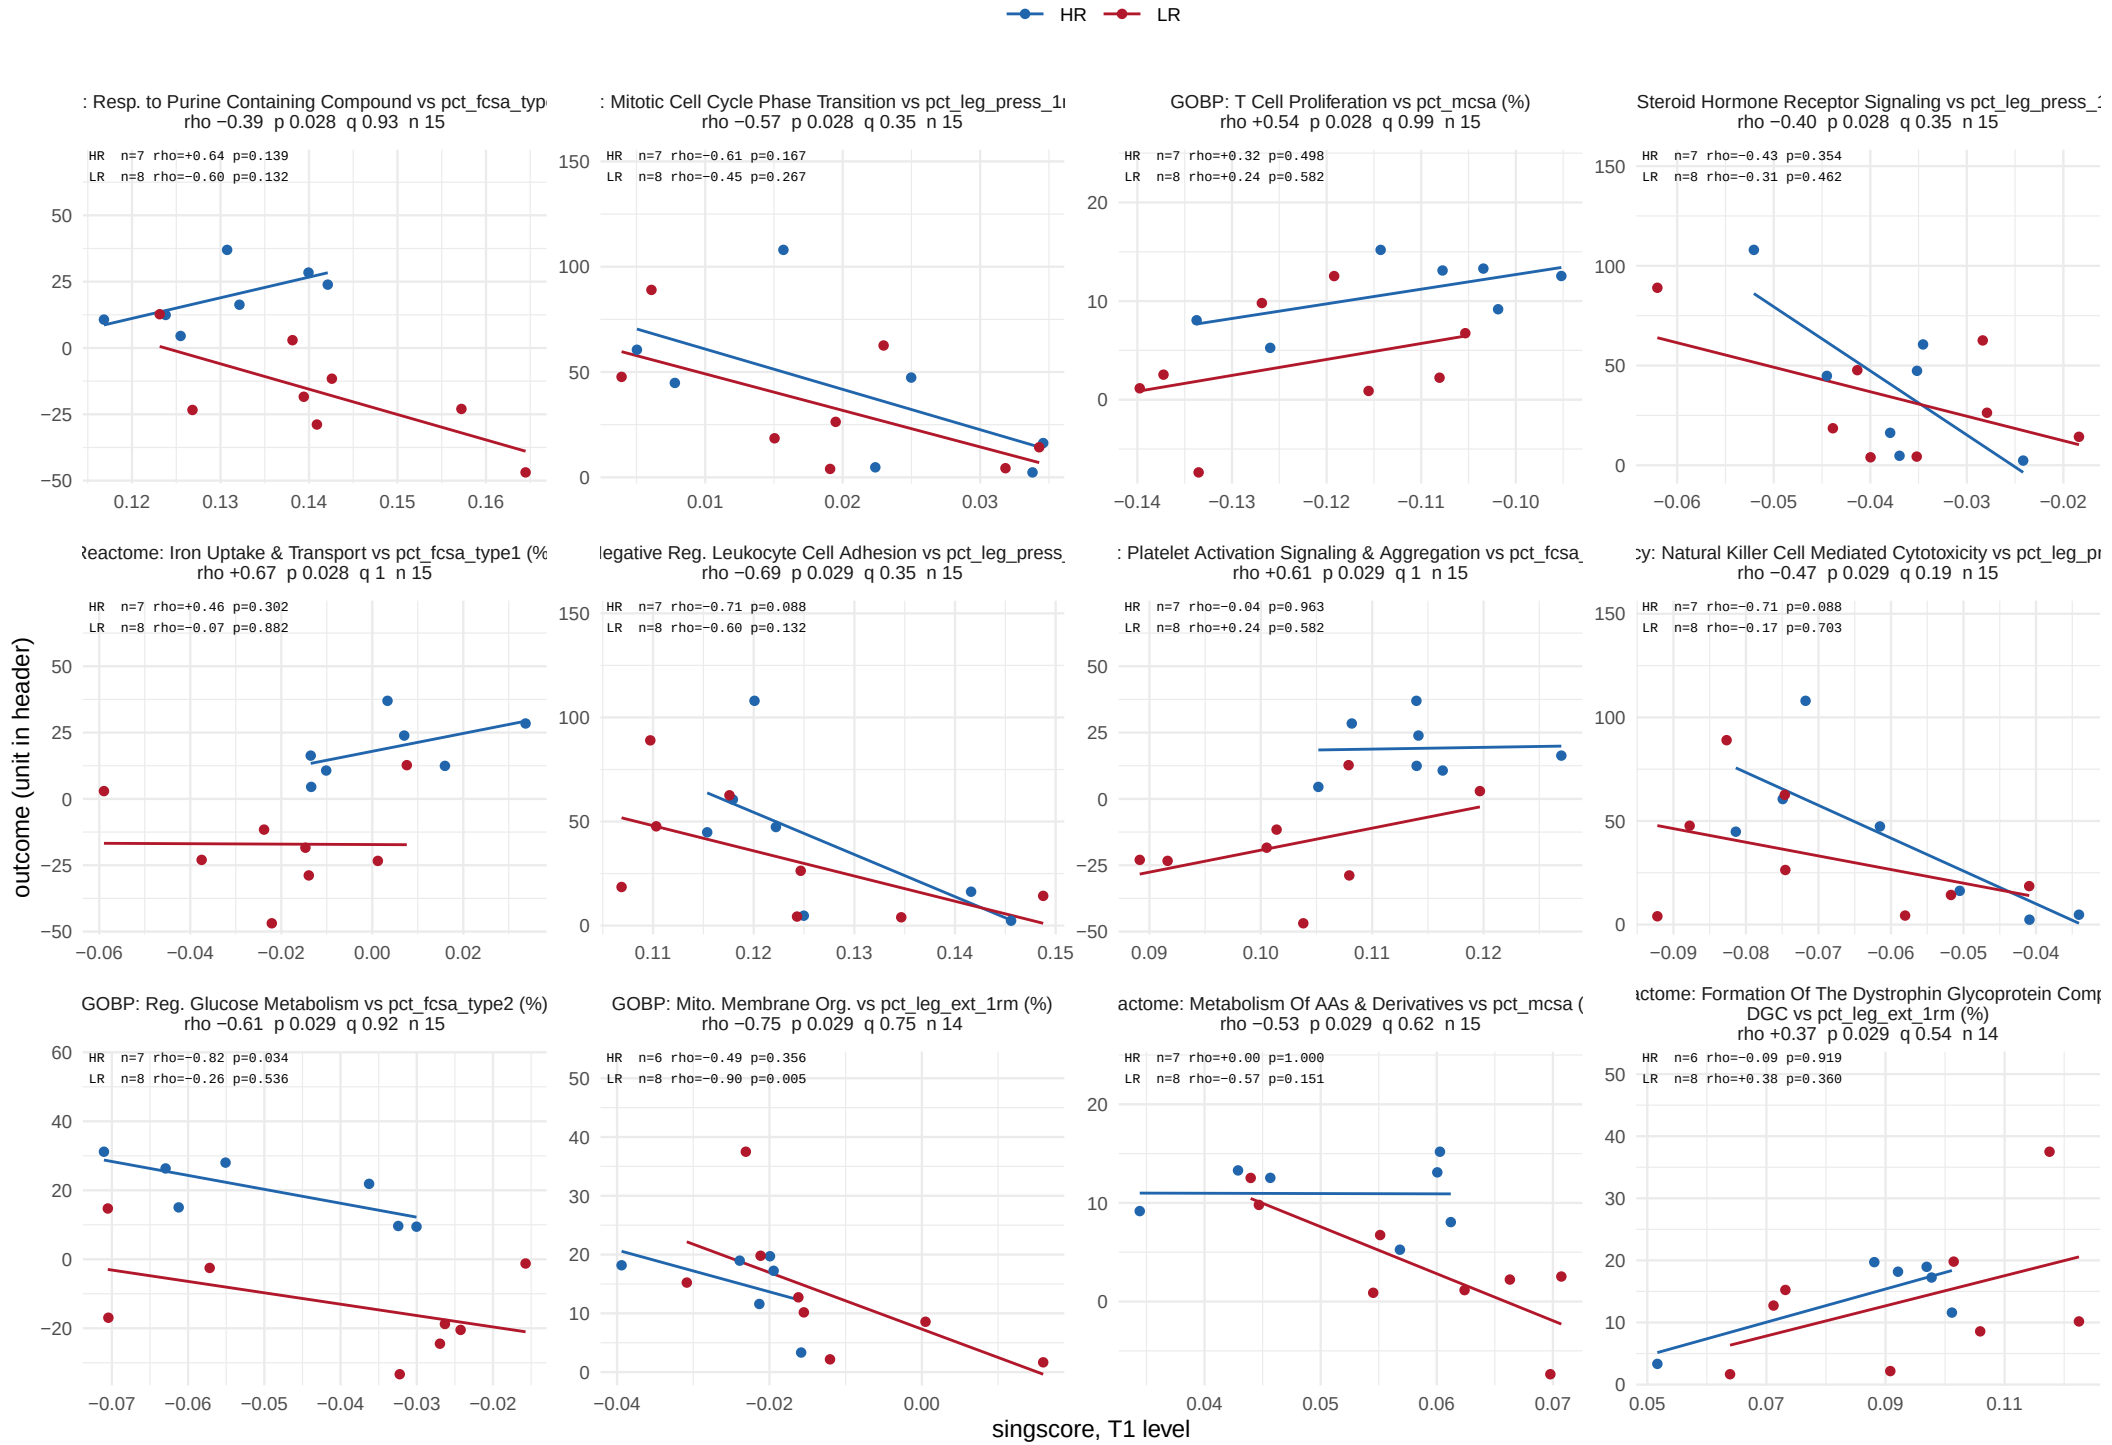

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


418 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 21 of 35.

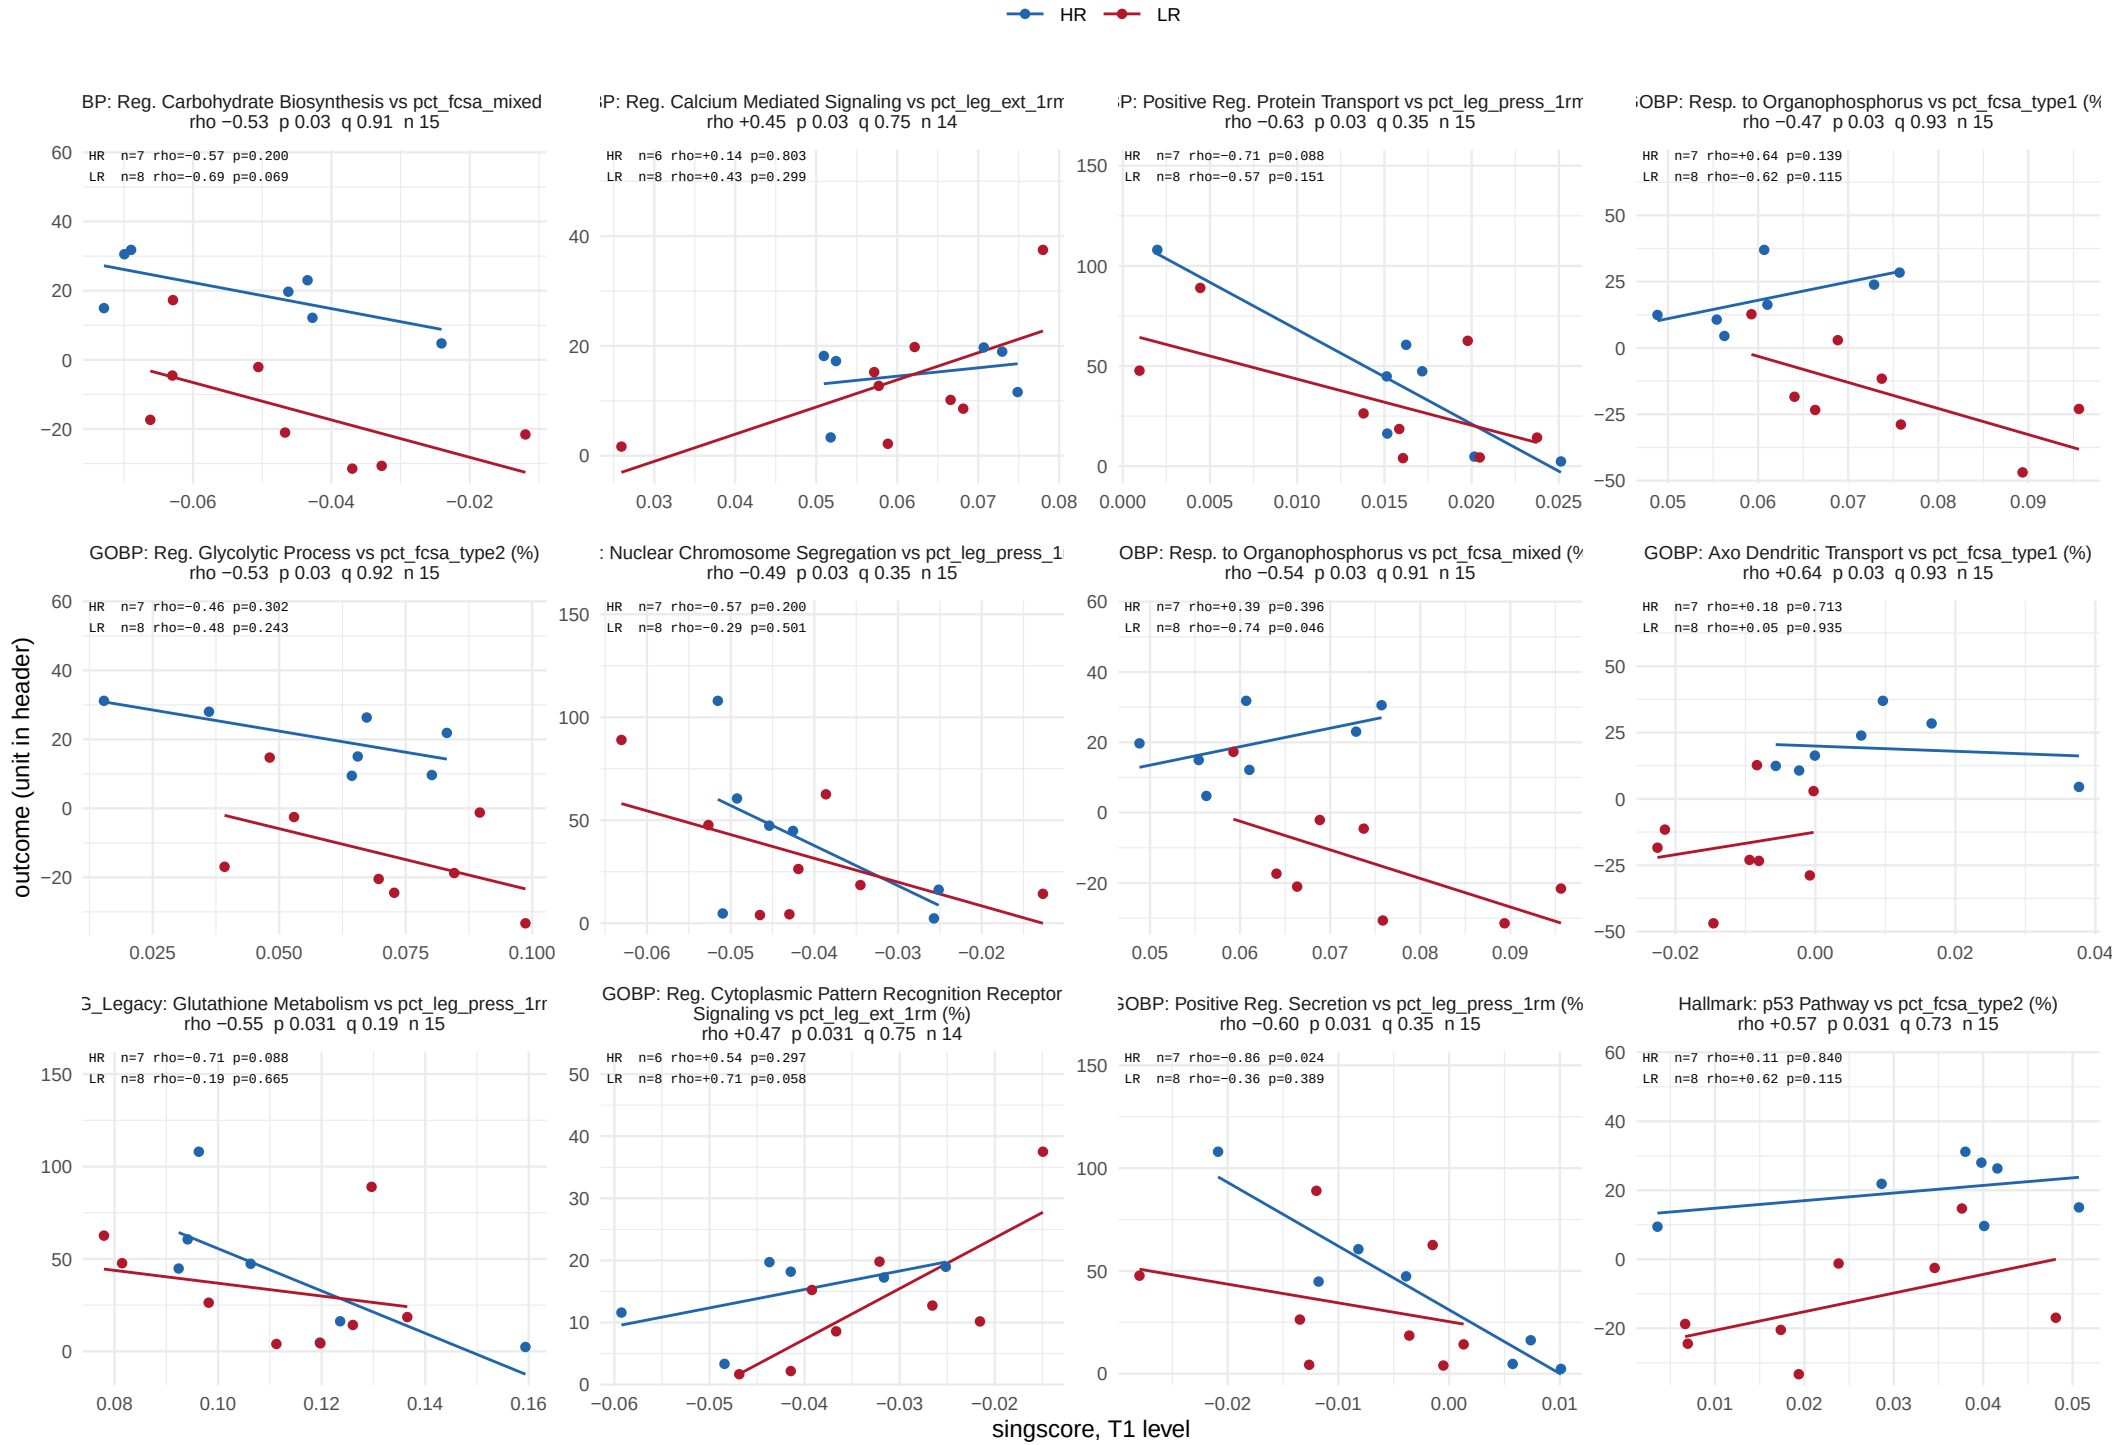

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


418 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 22 of 35.

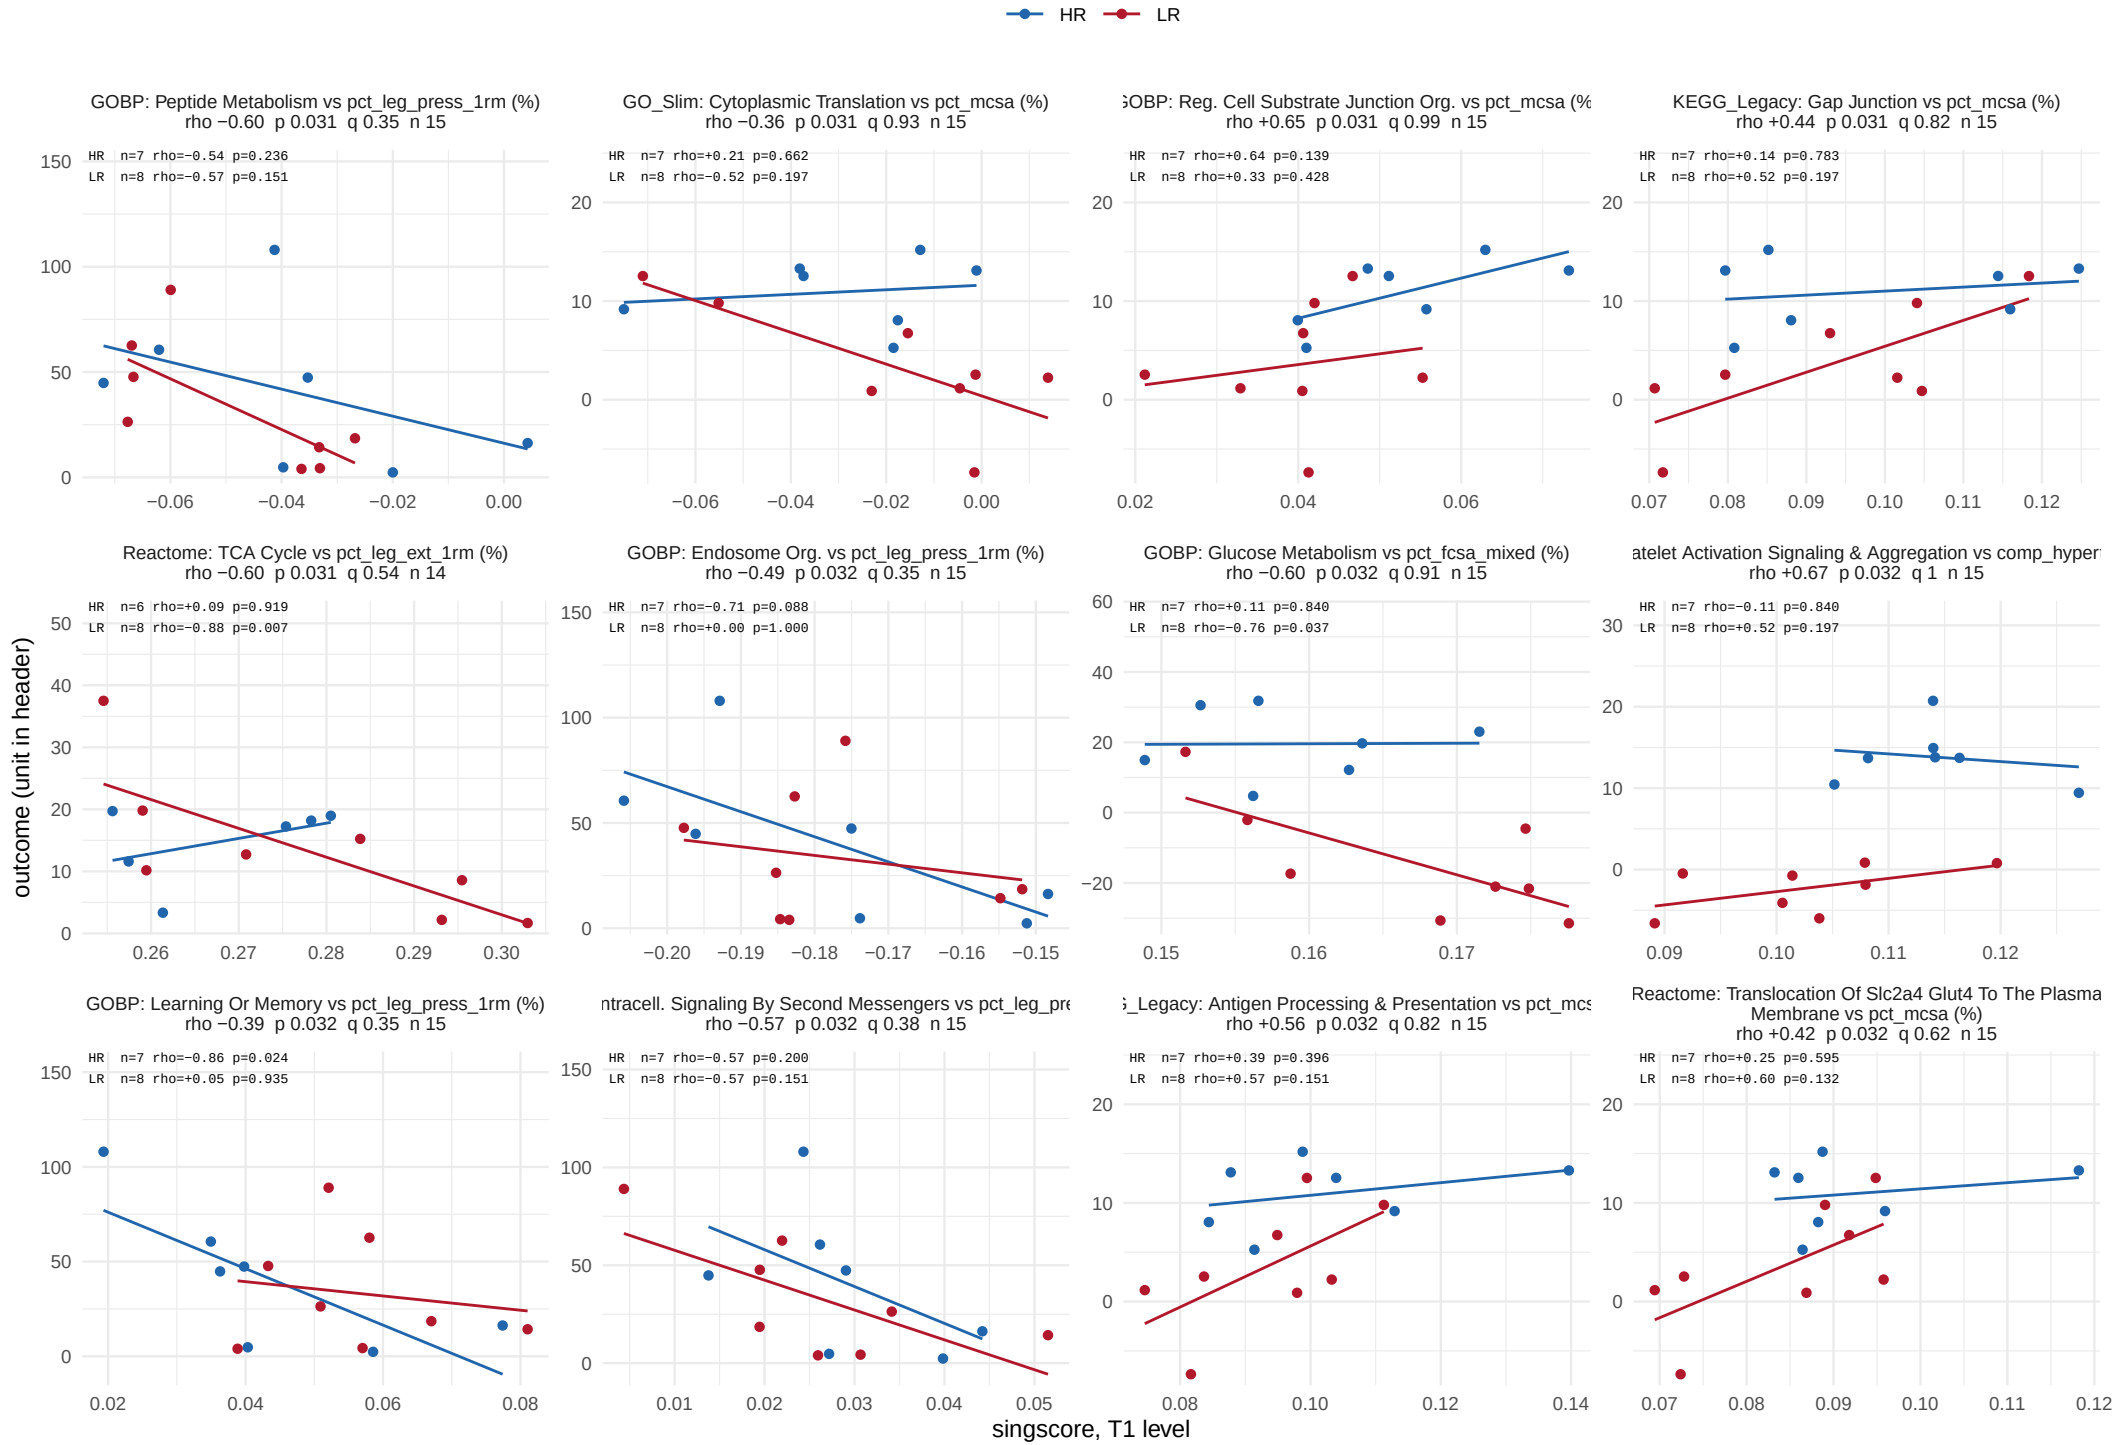

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


418 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 23 of 35.

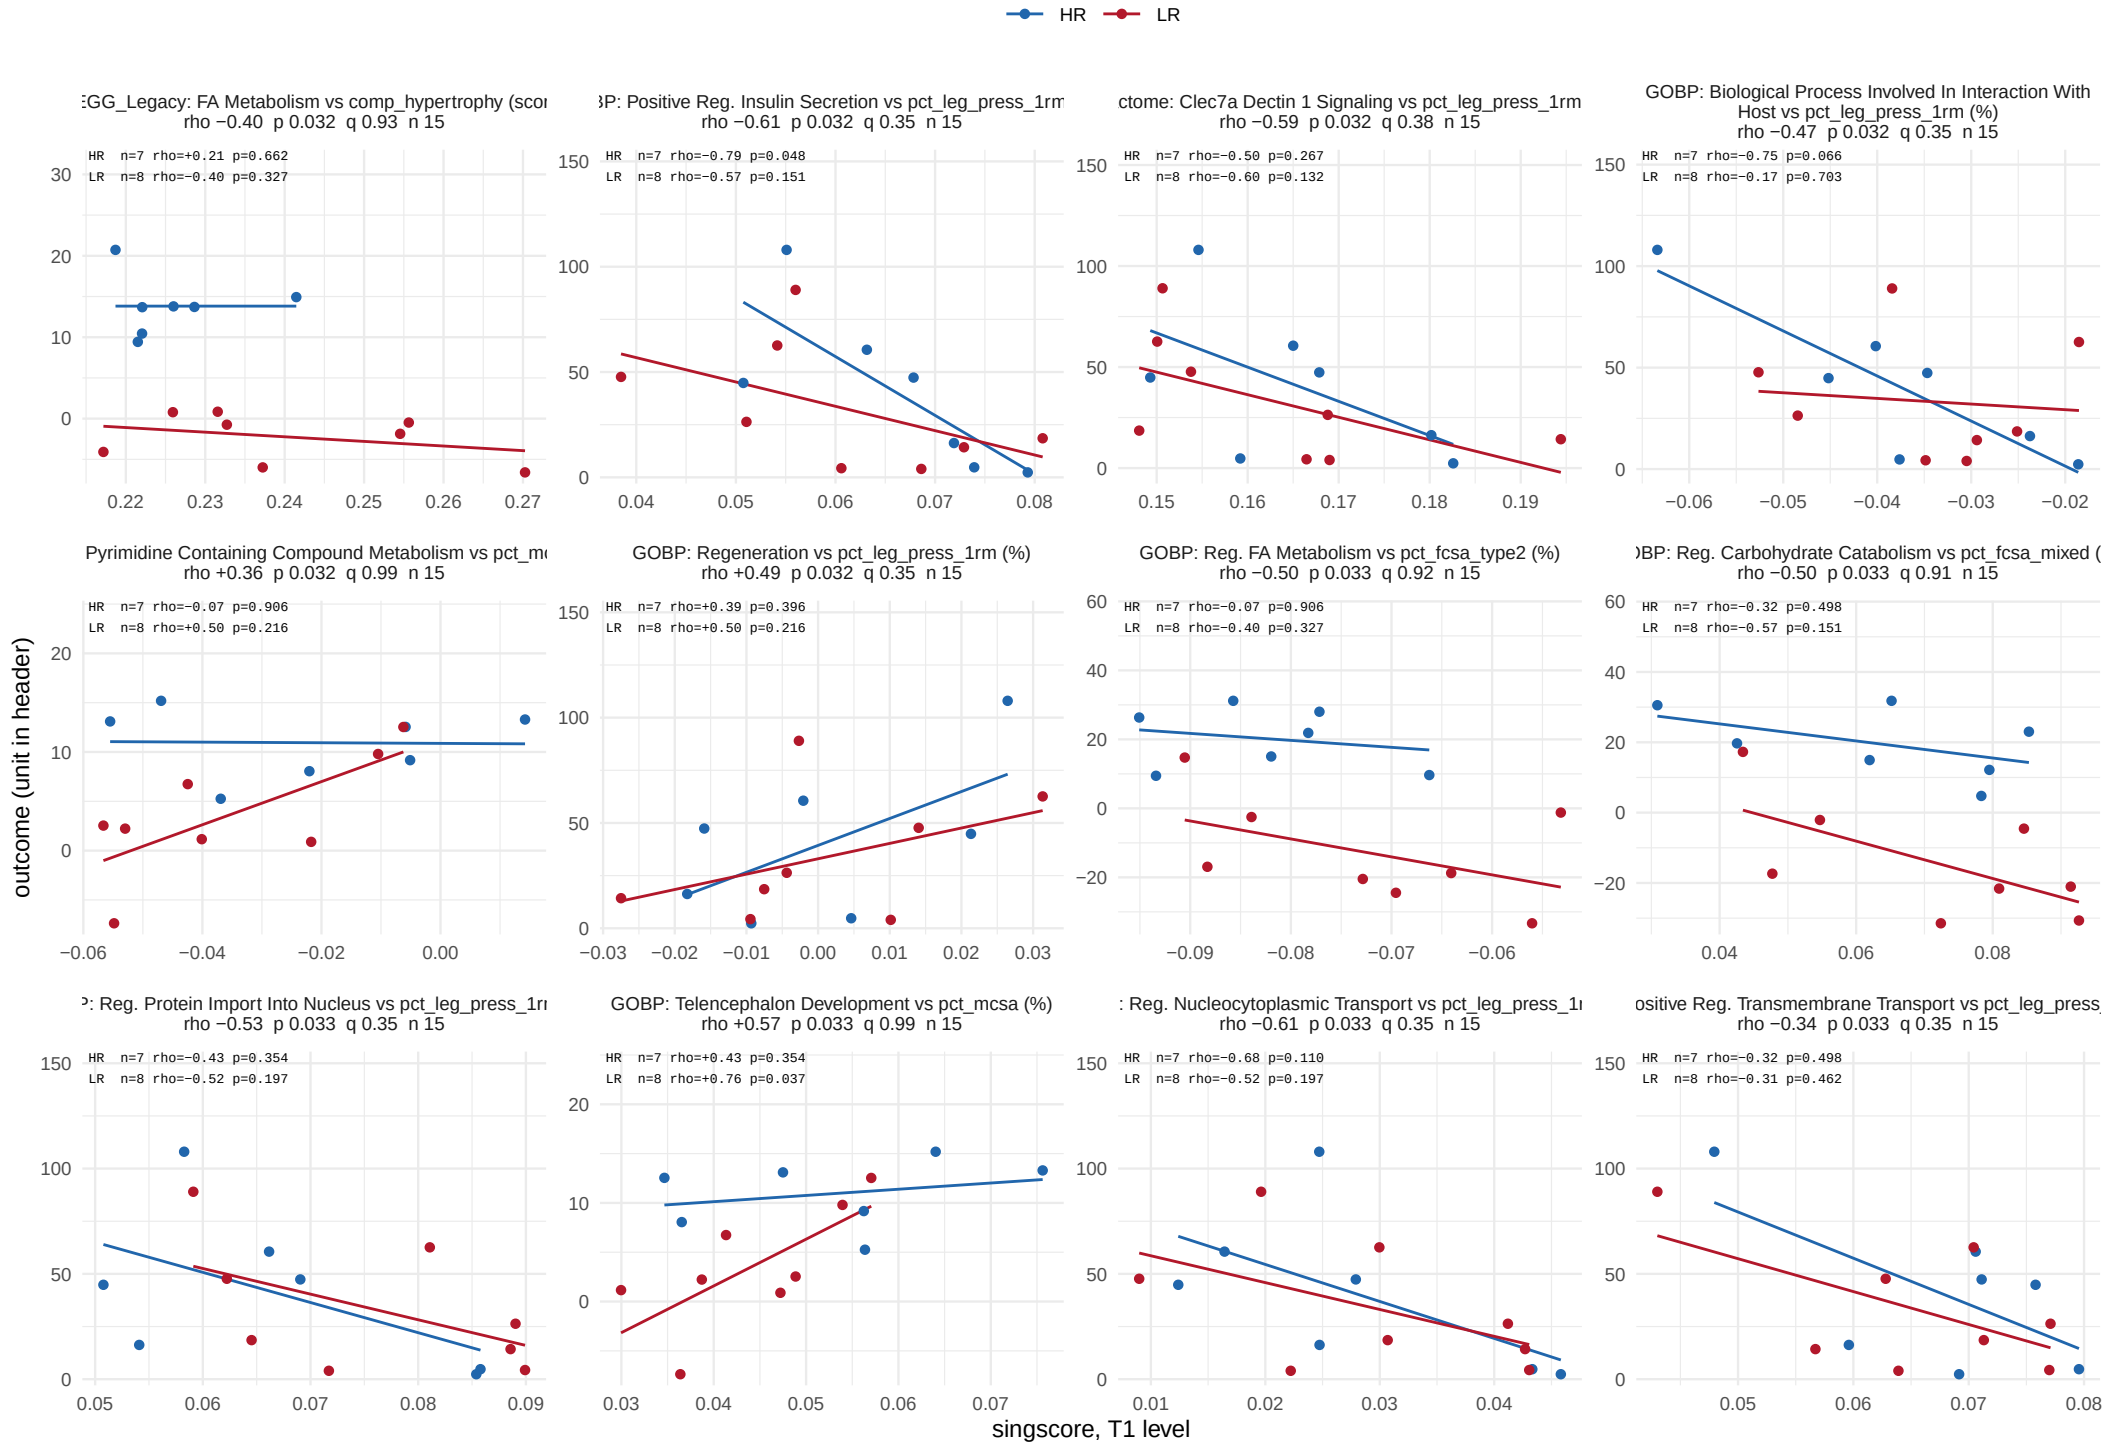

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


418 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 24 of 35.

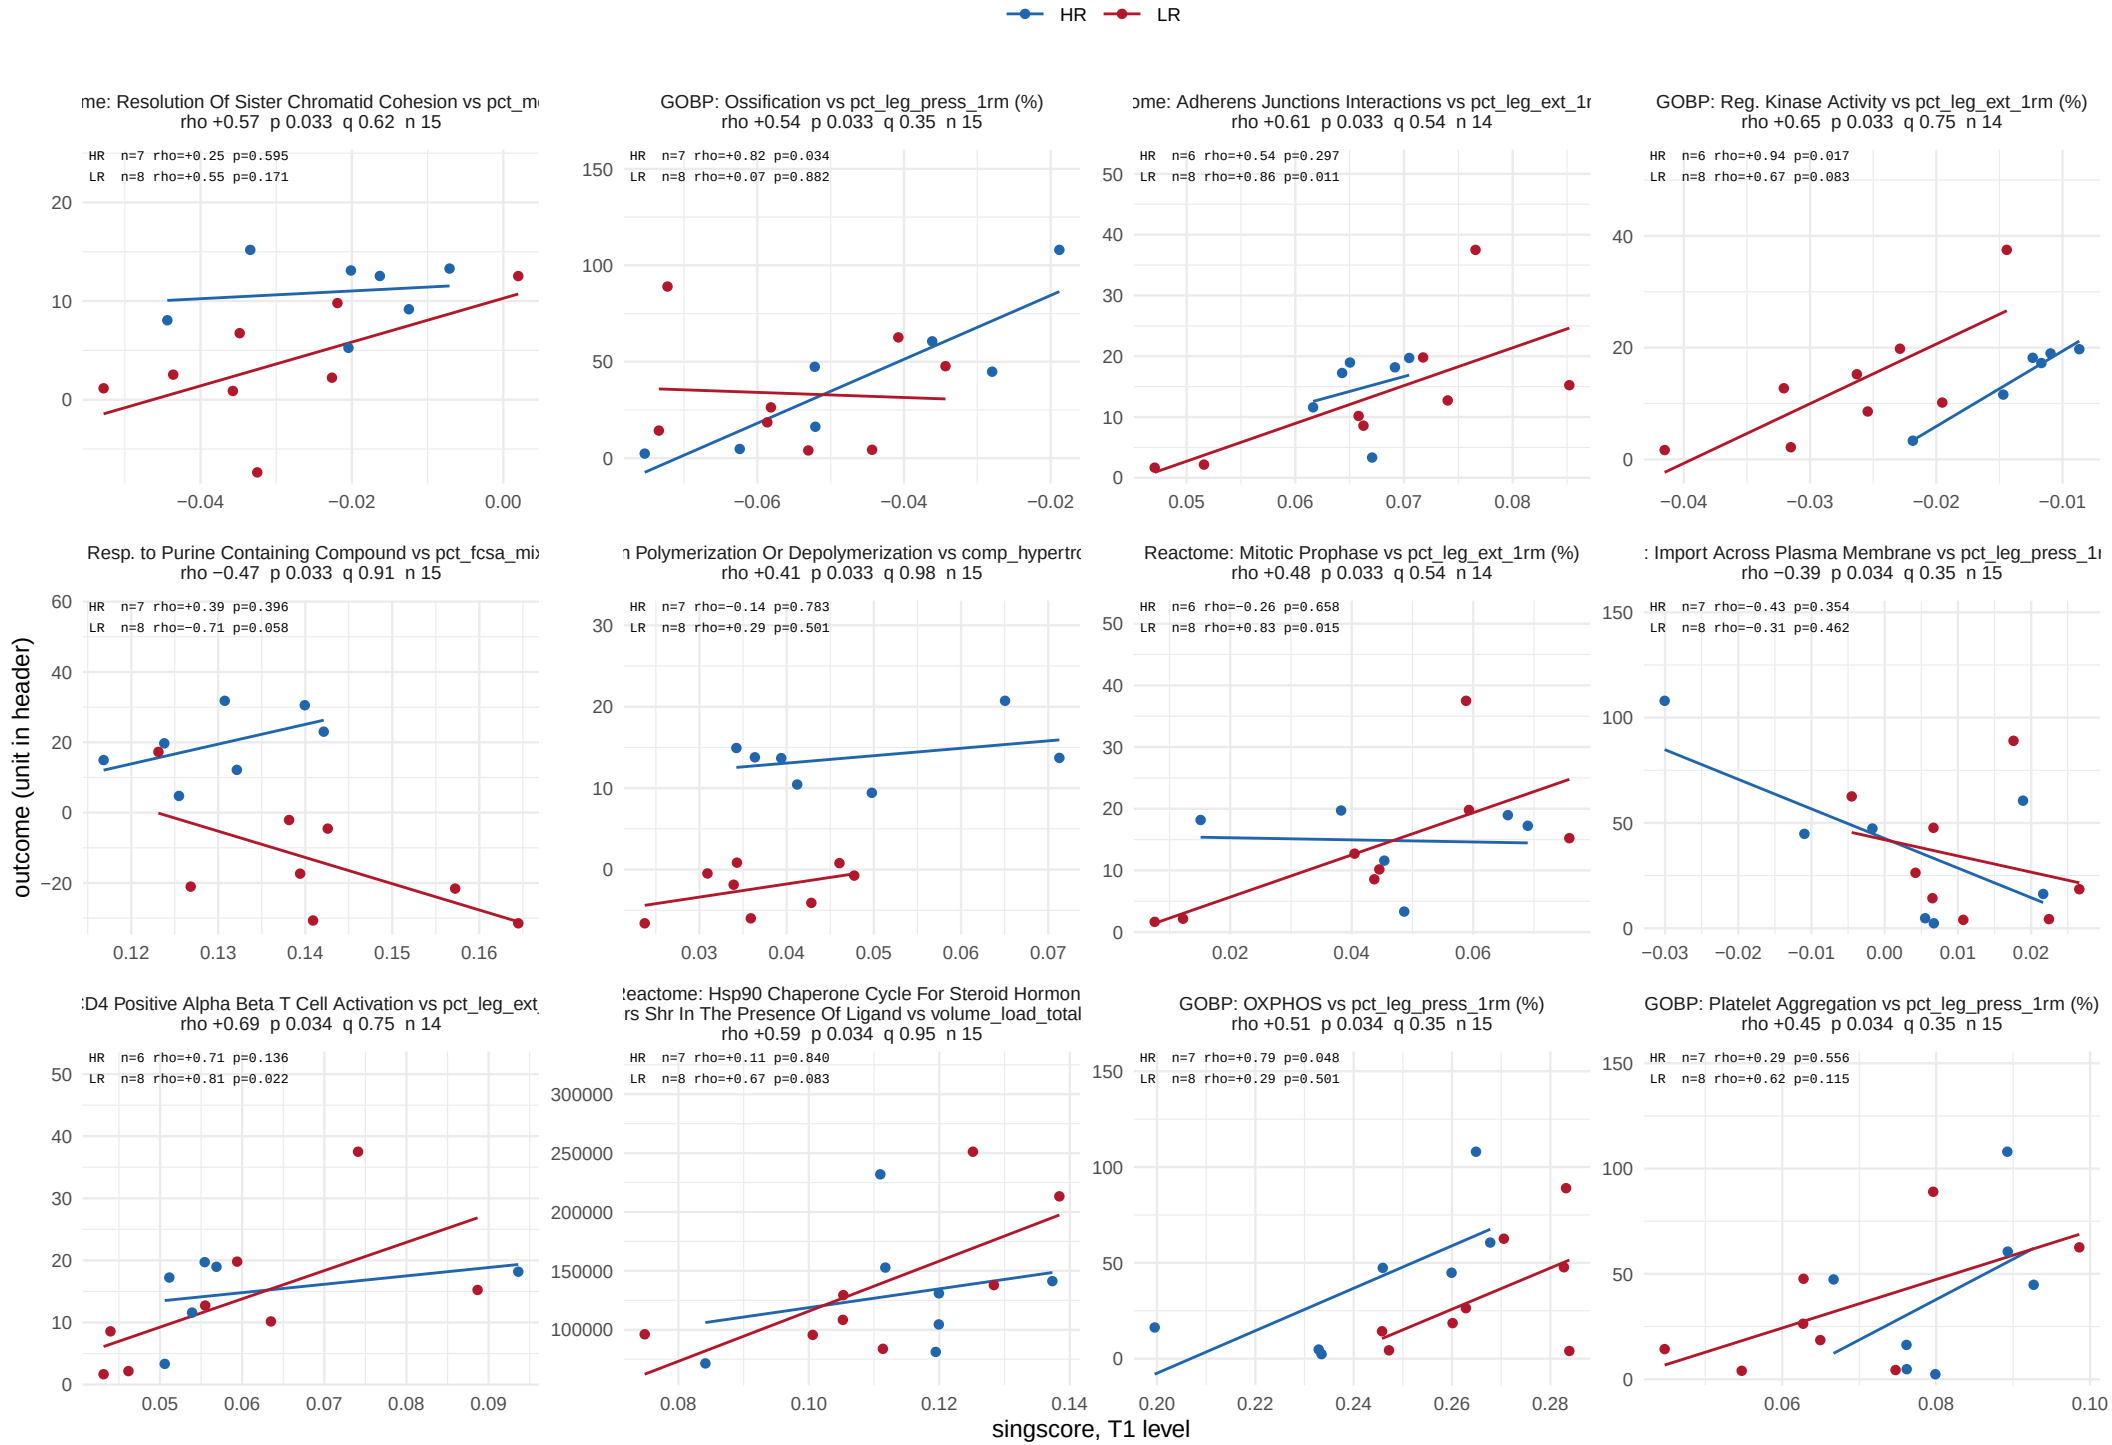

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


418 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 25 of 35.

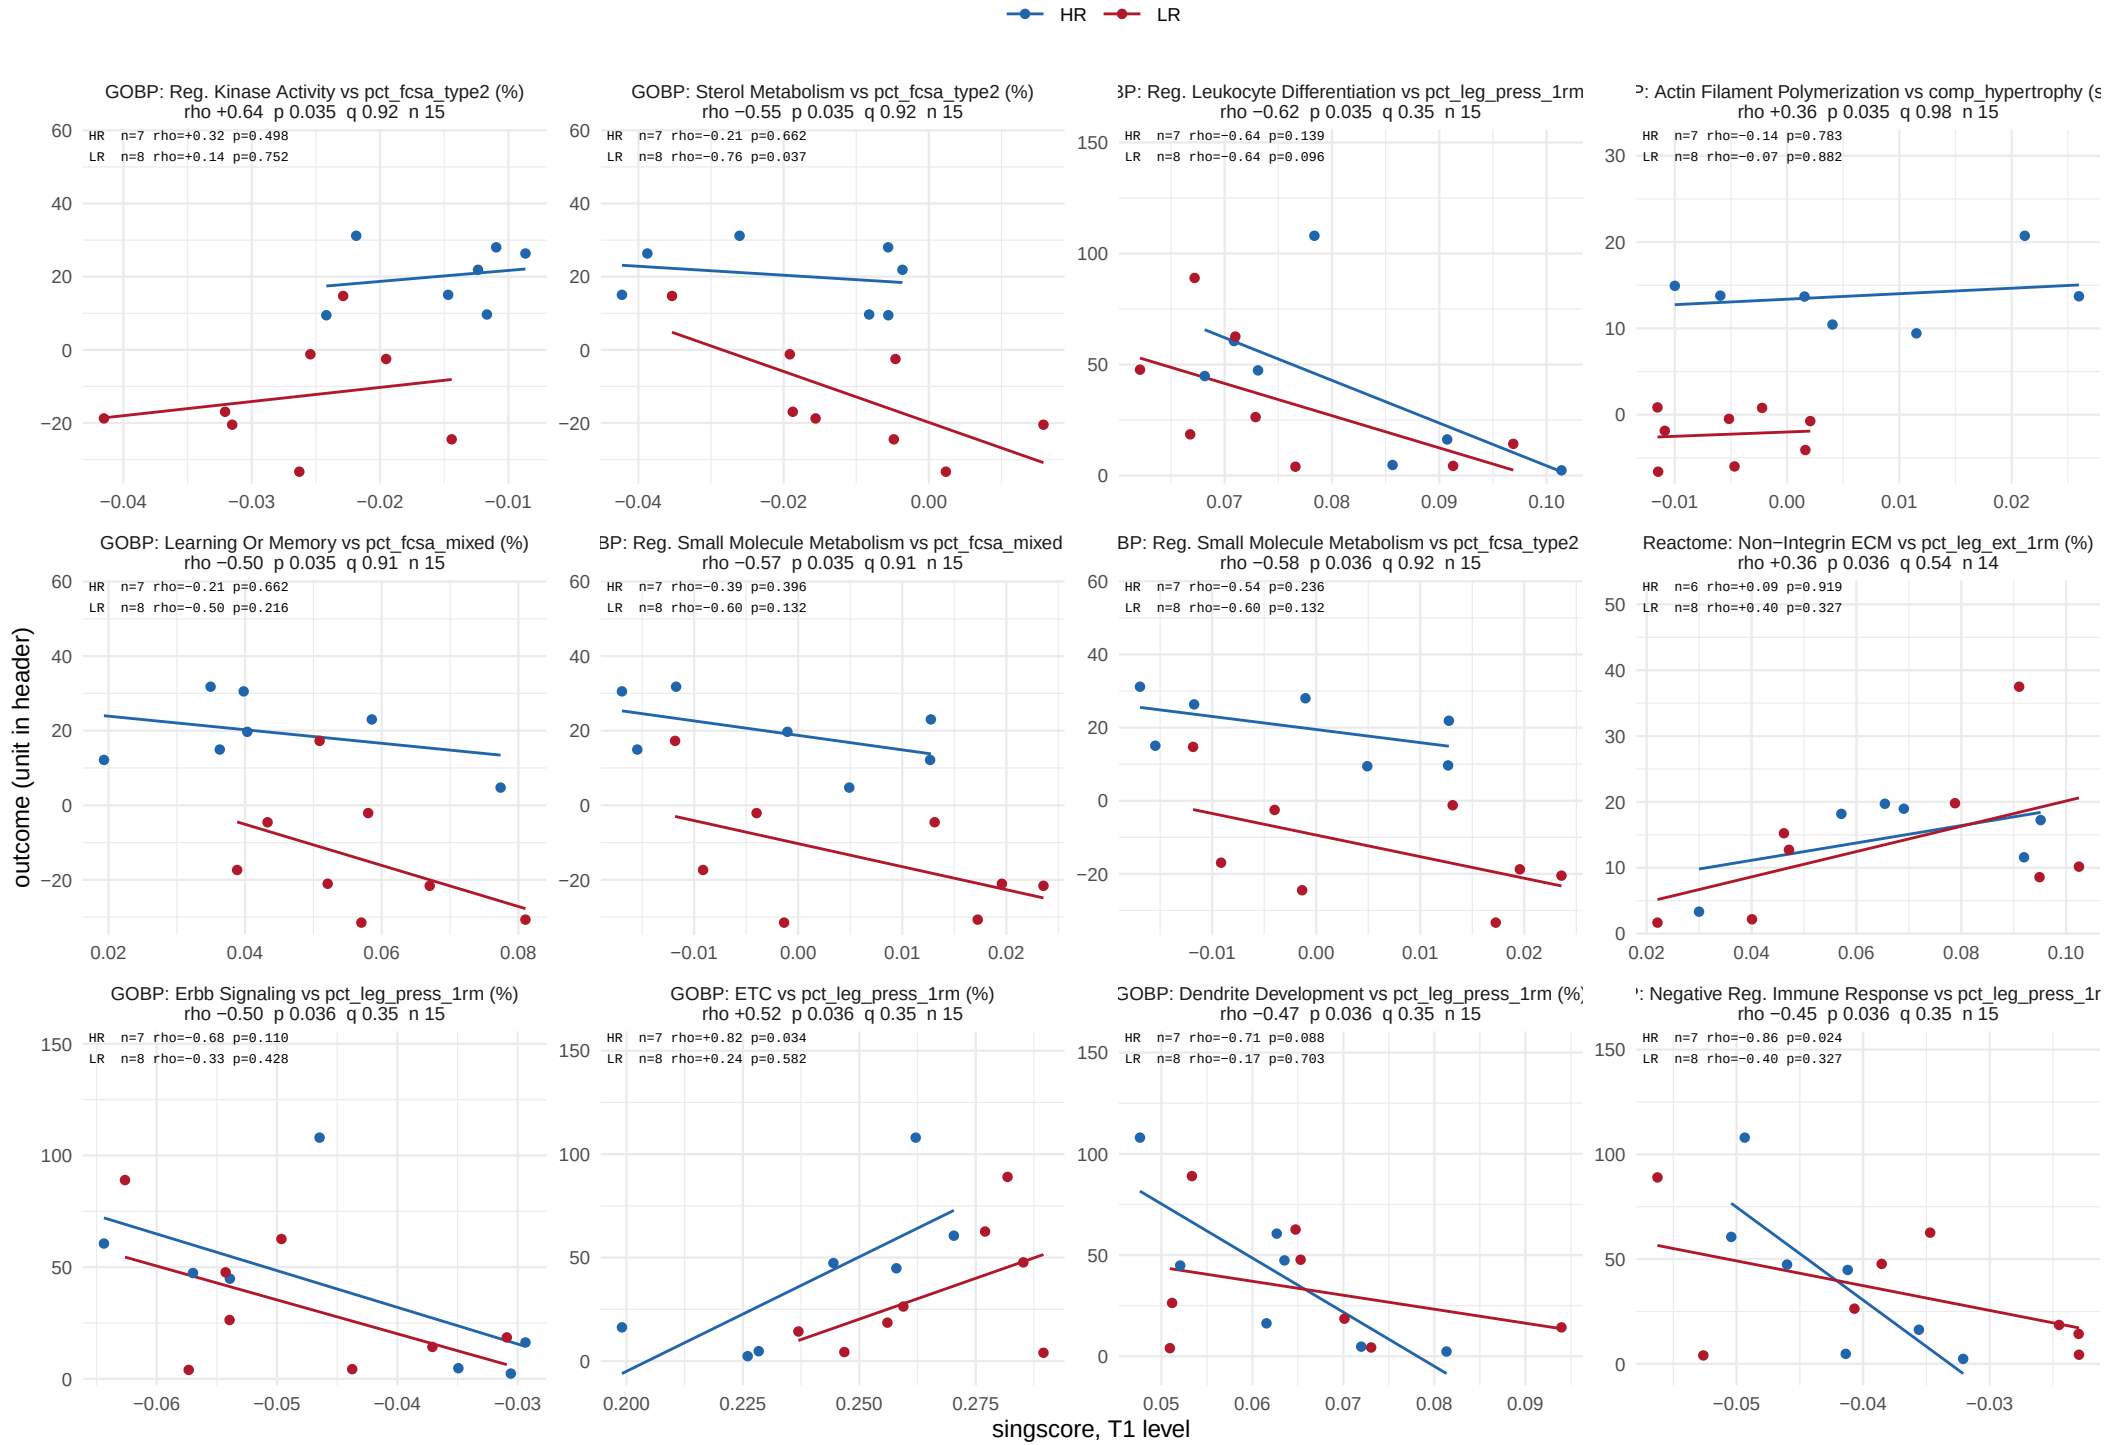

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


418 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 26 of 35.

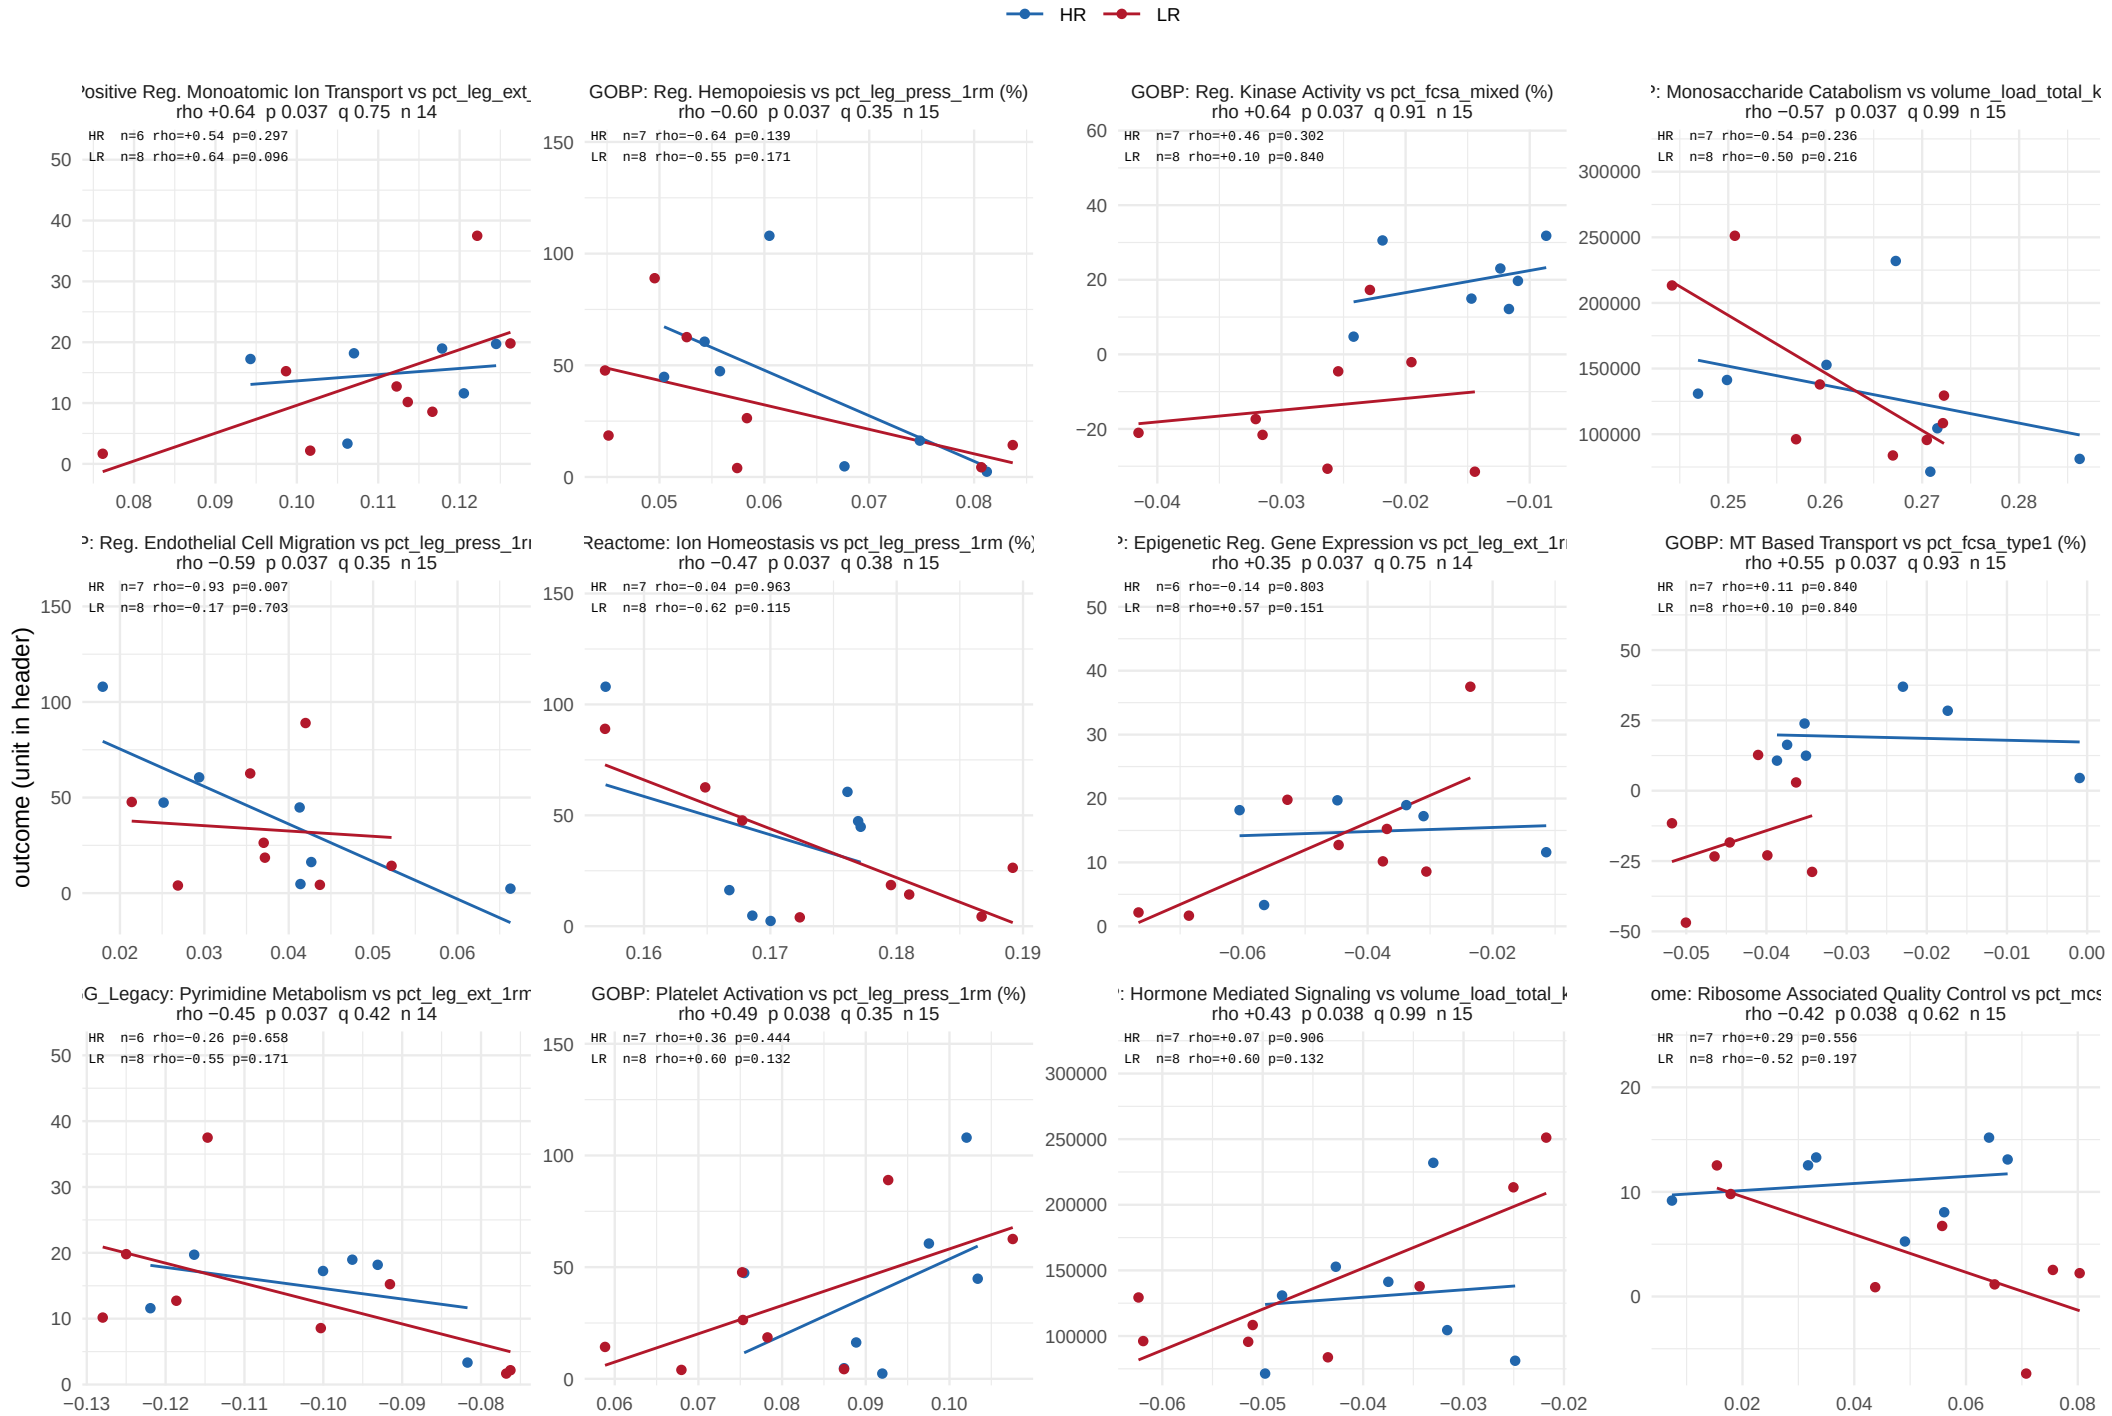

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


418 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 27 of 35.

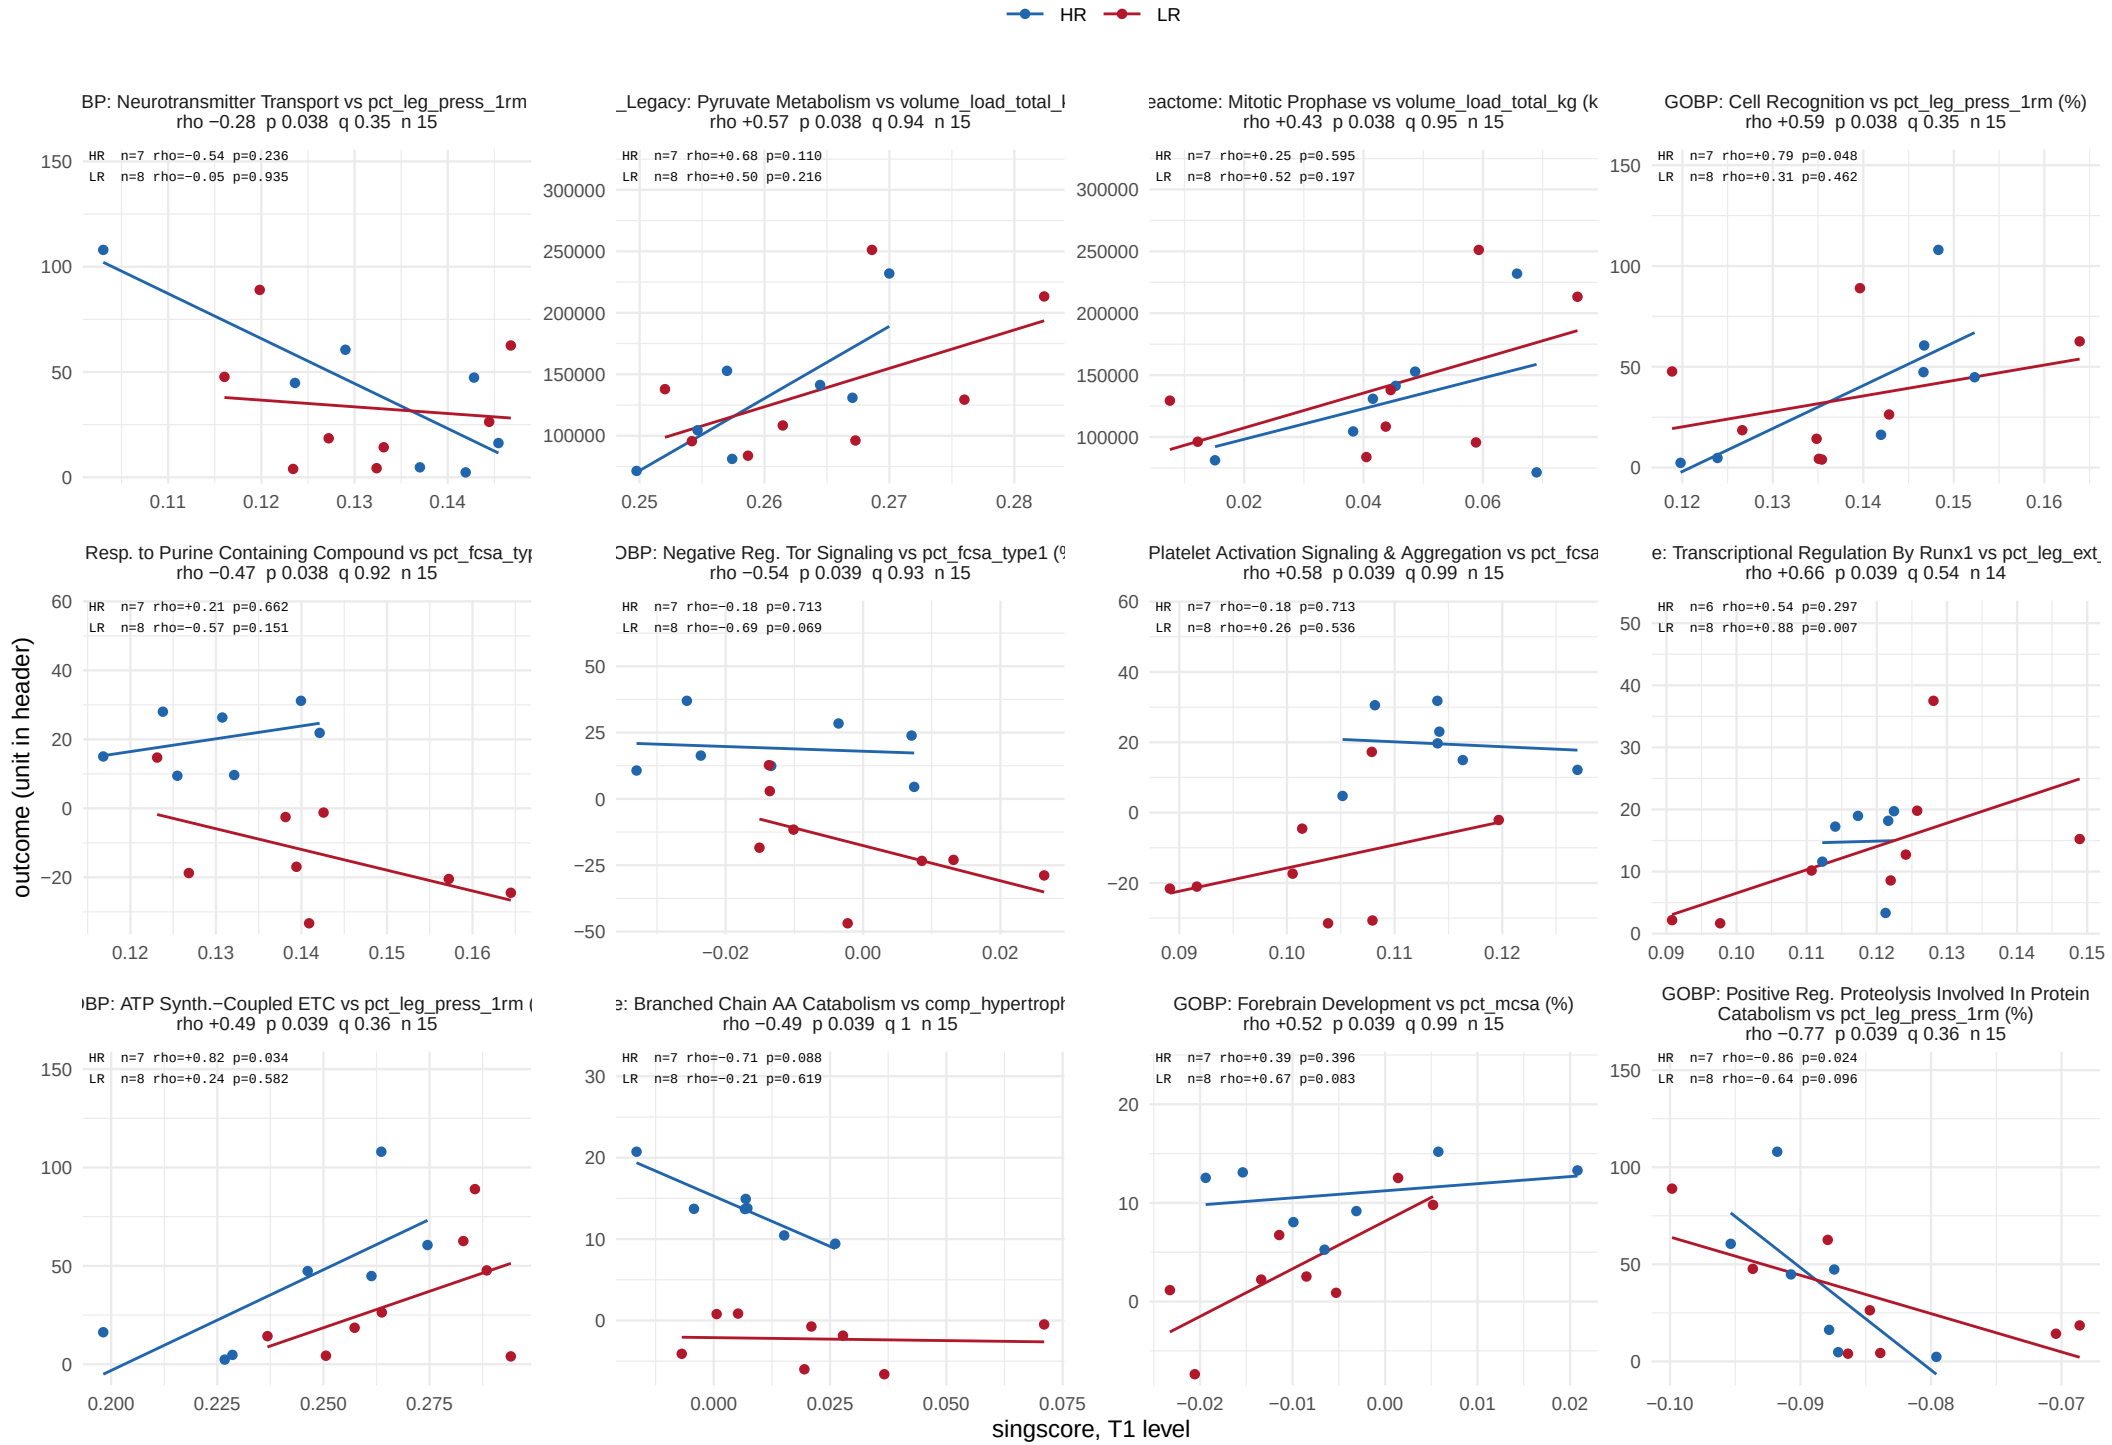

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


418 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 28 of 35.

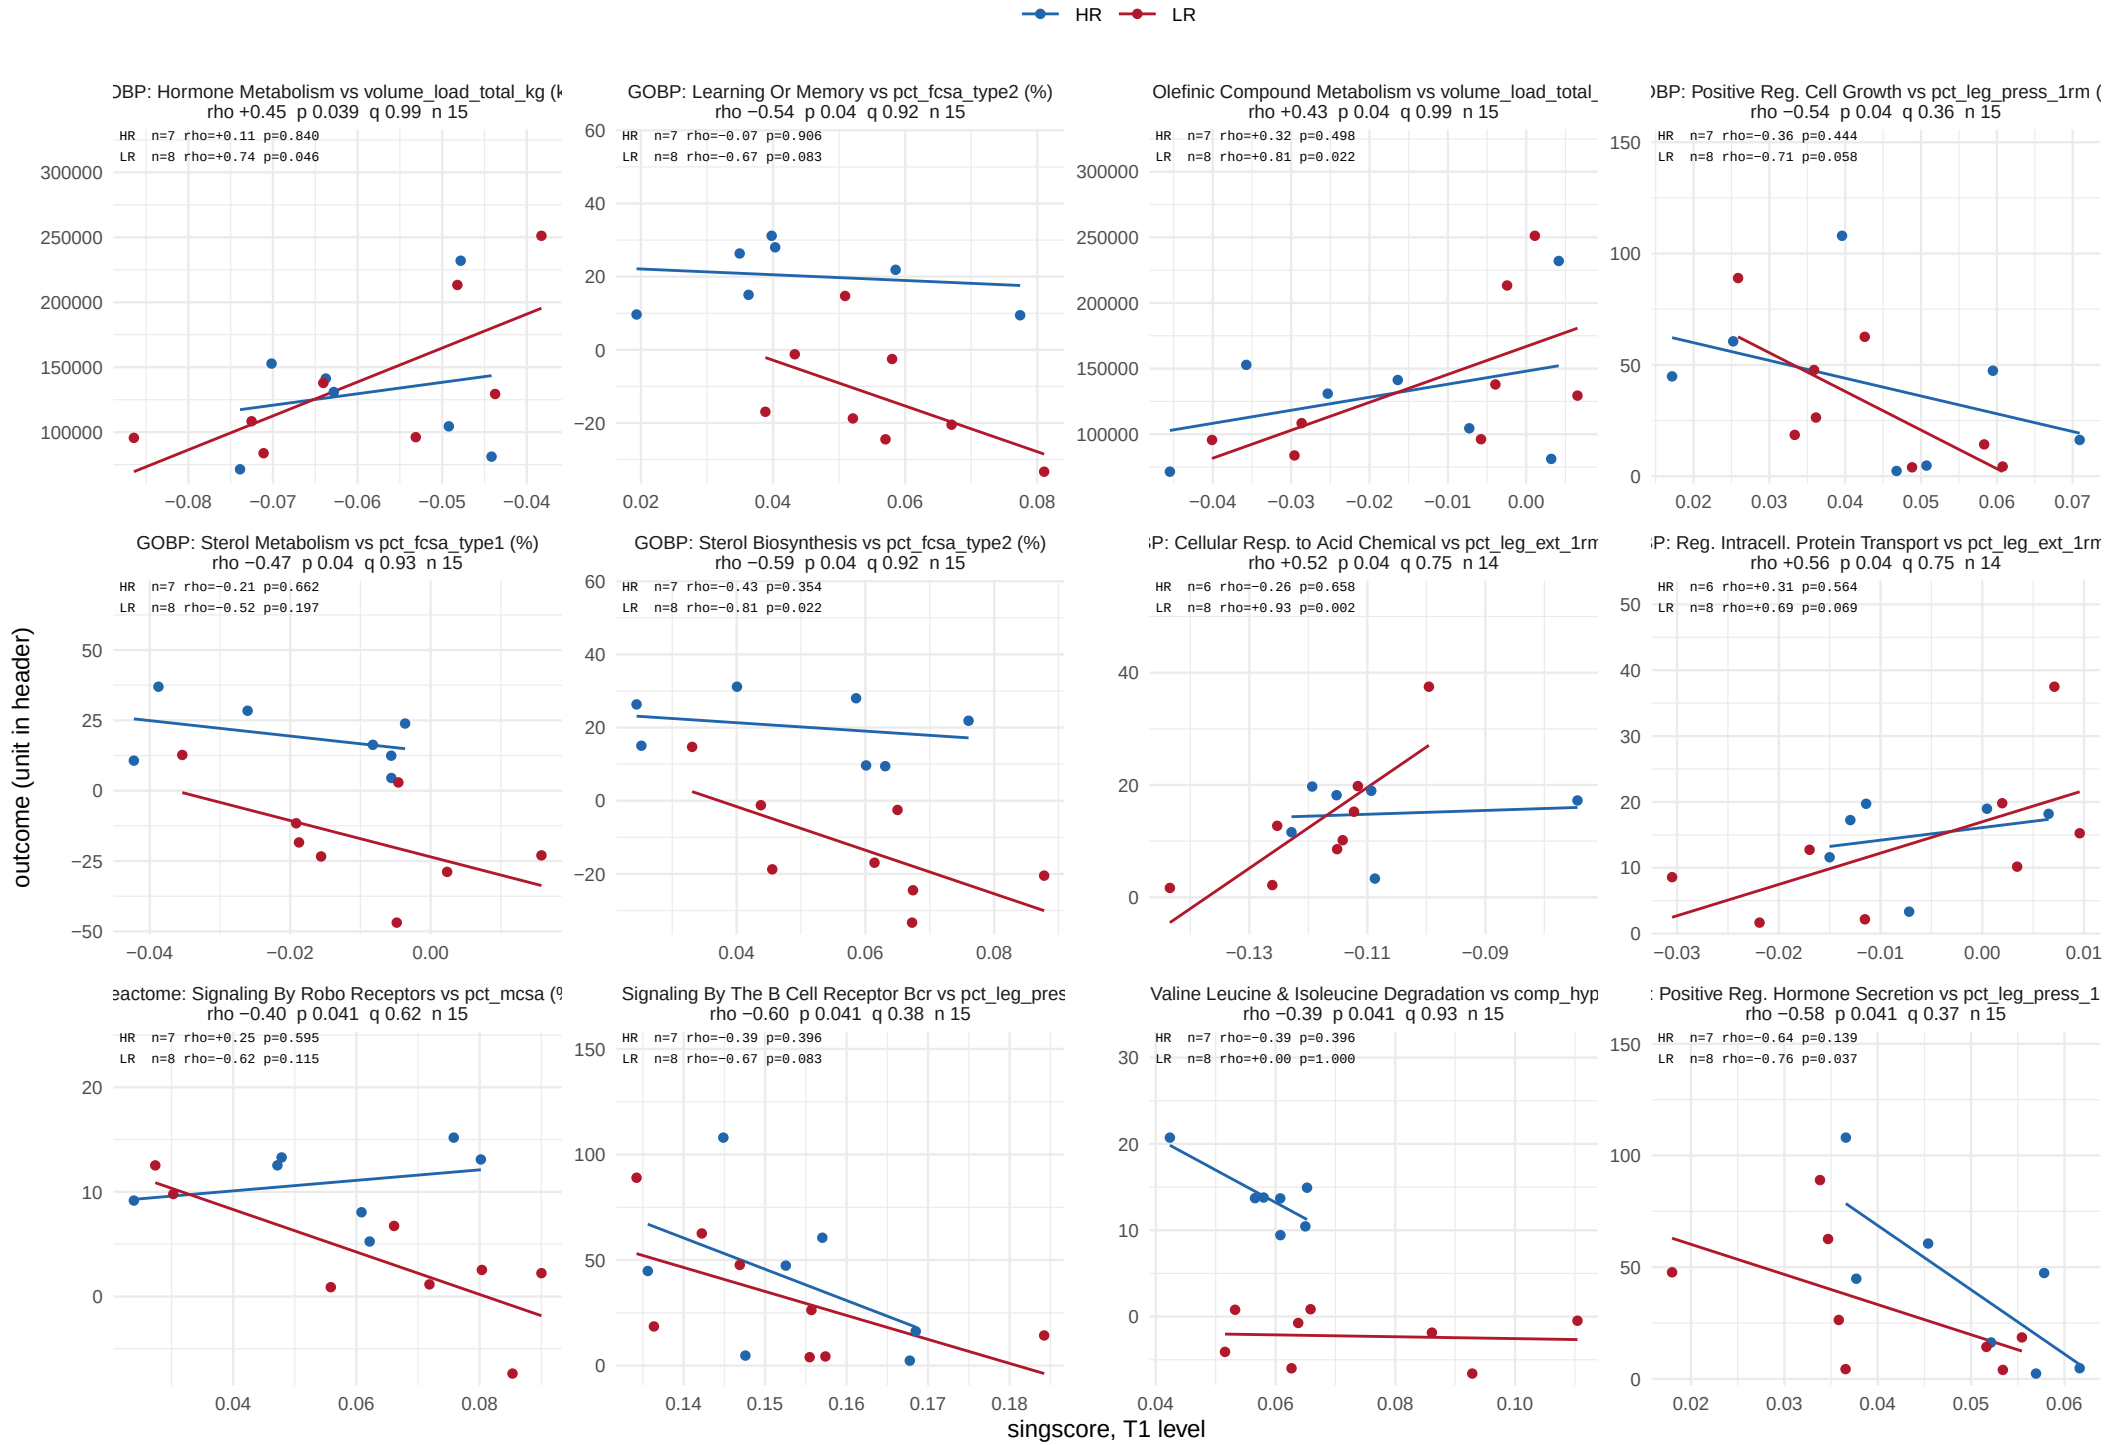

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


418 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 29 of 35.

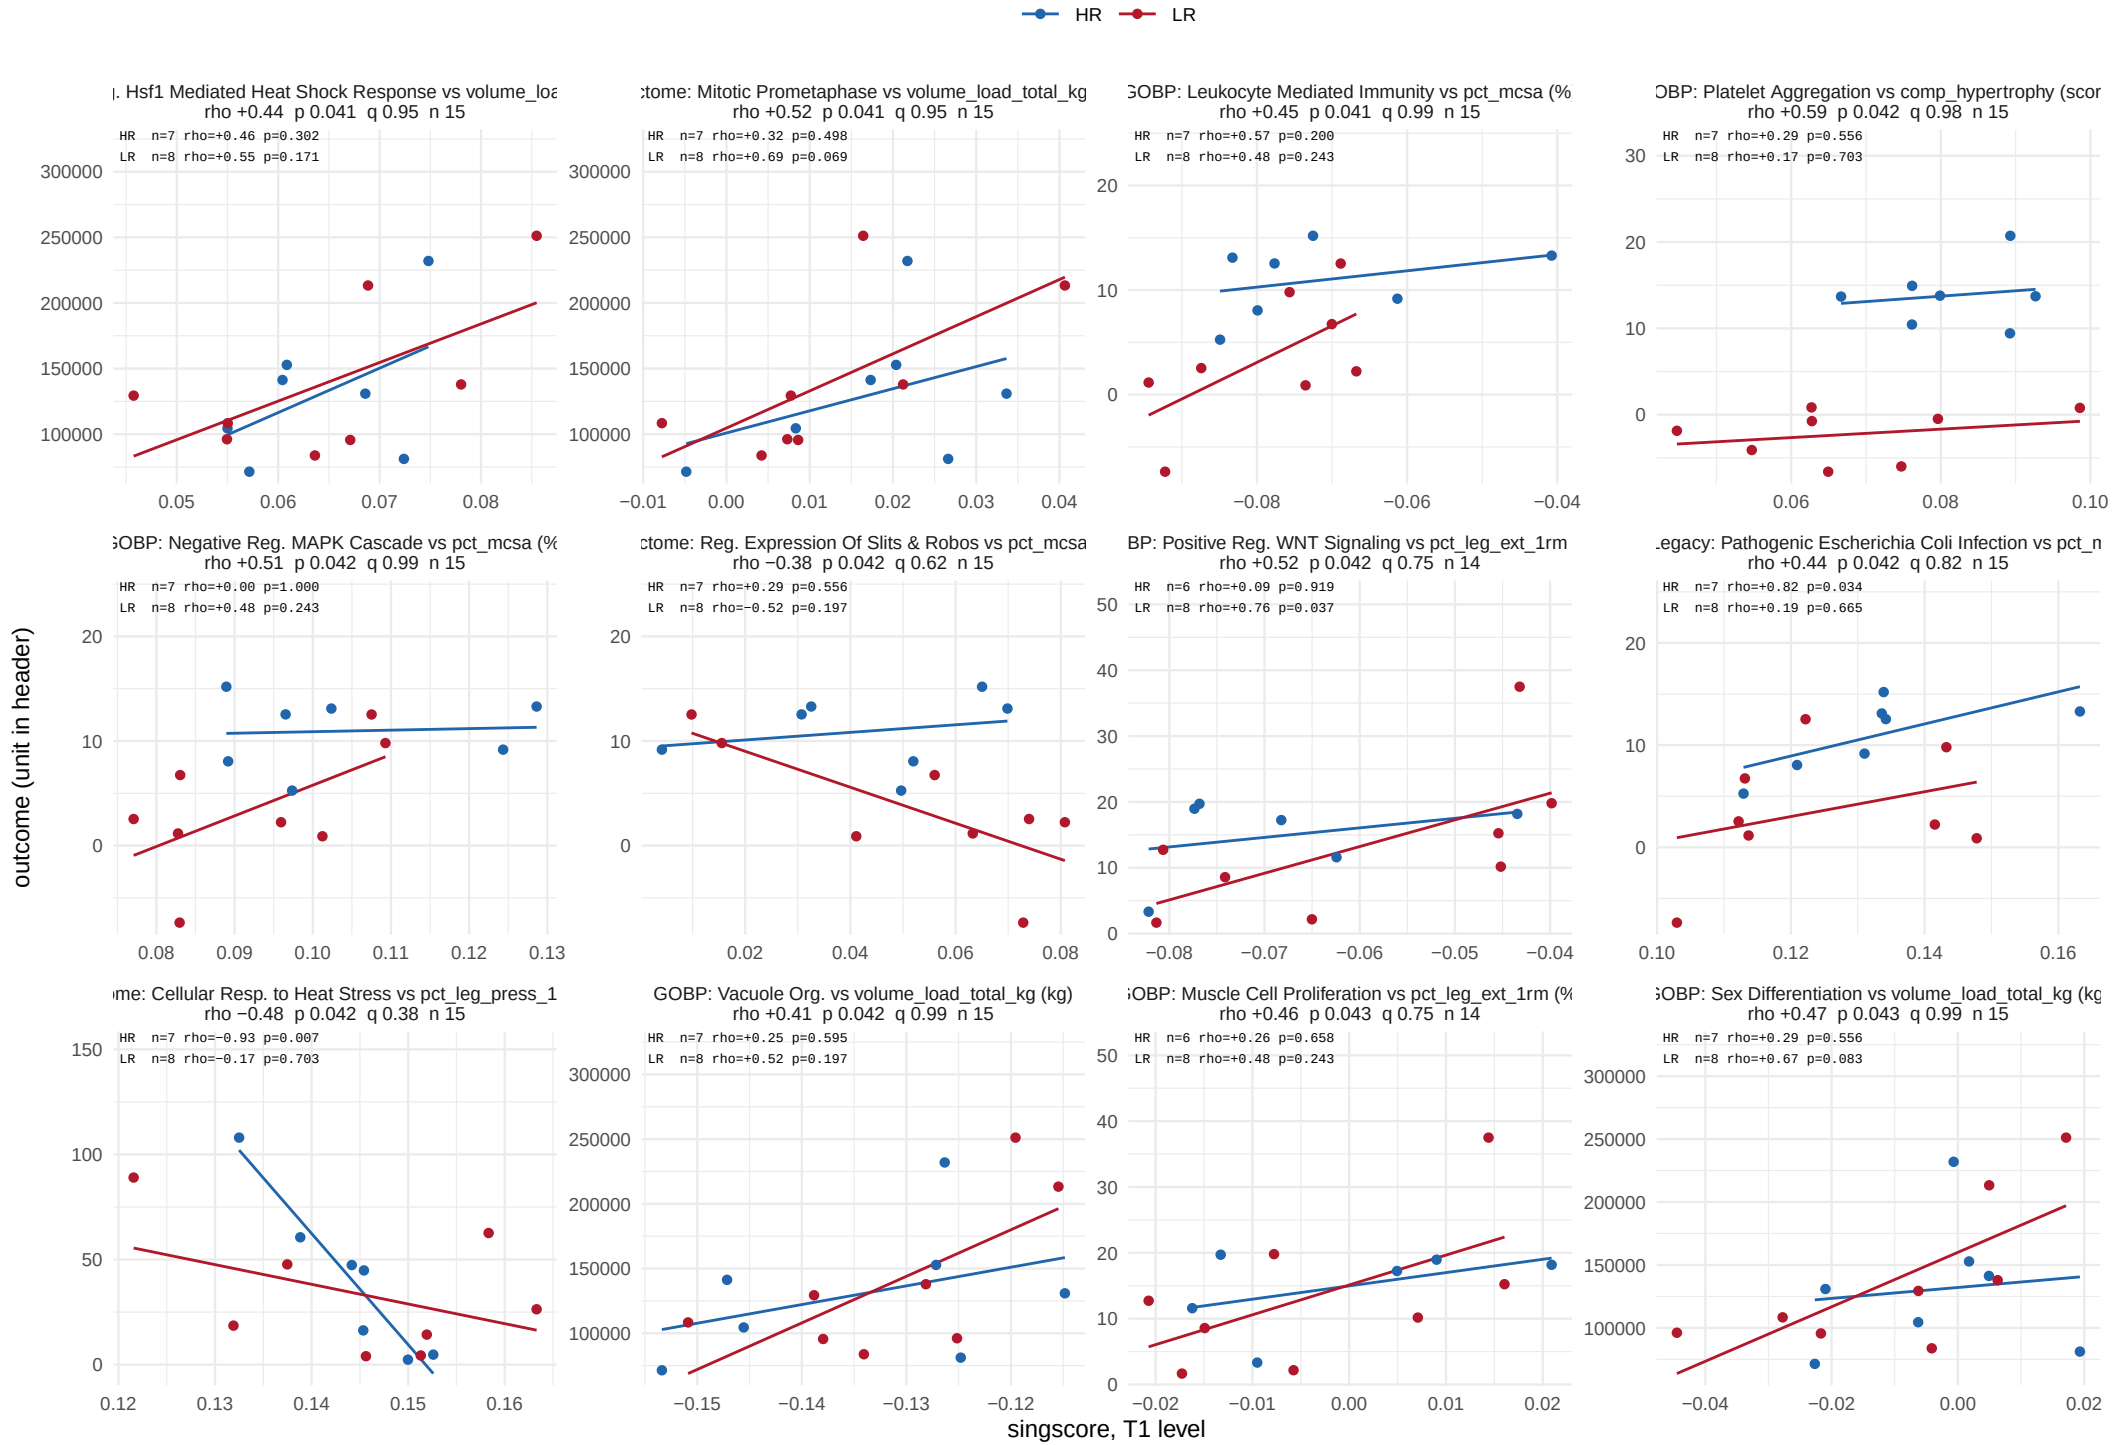

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


418 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 30 of 35.

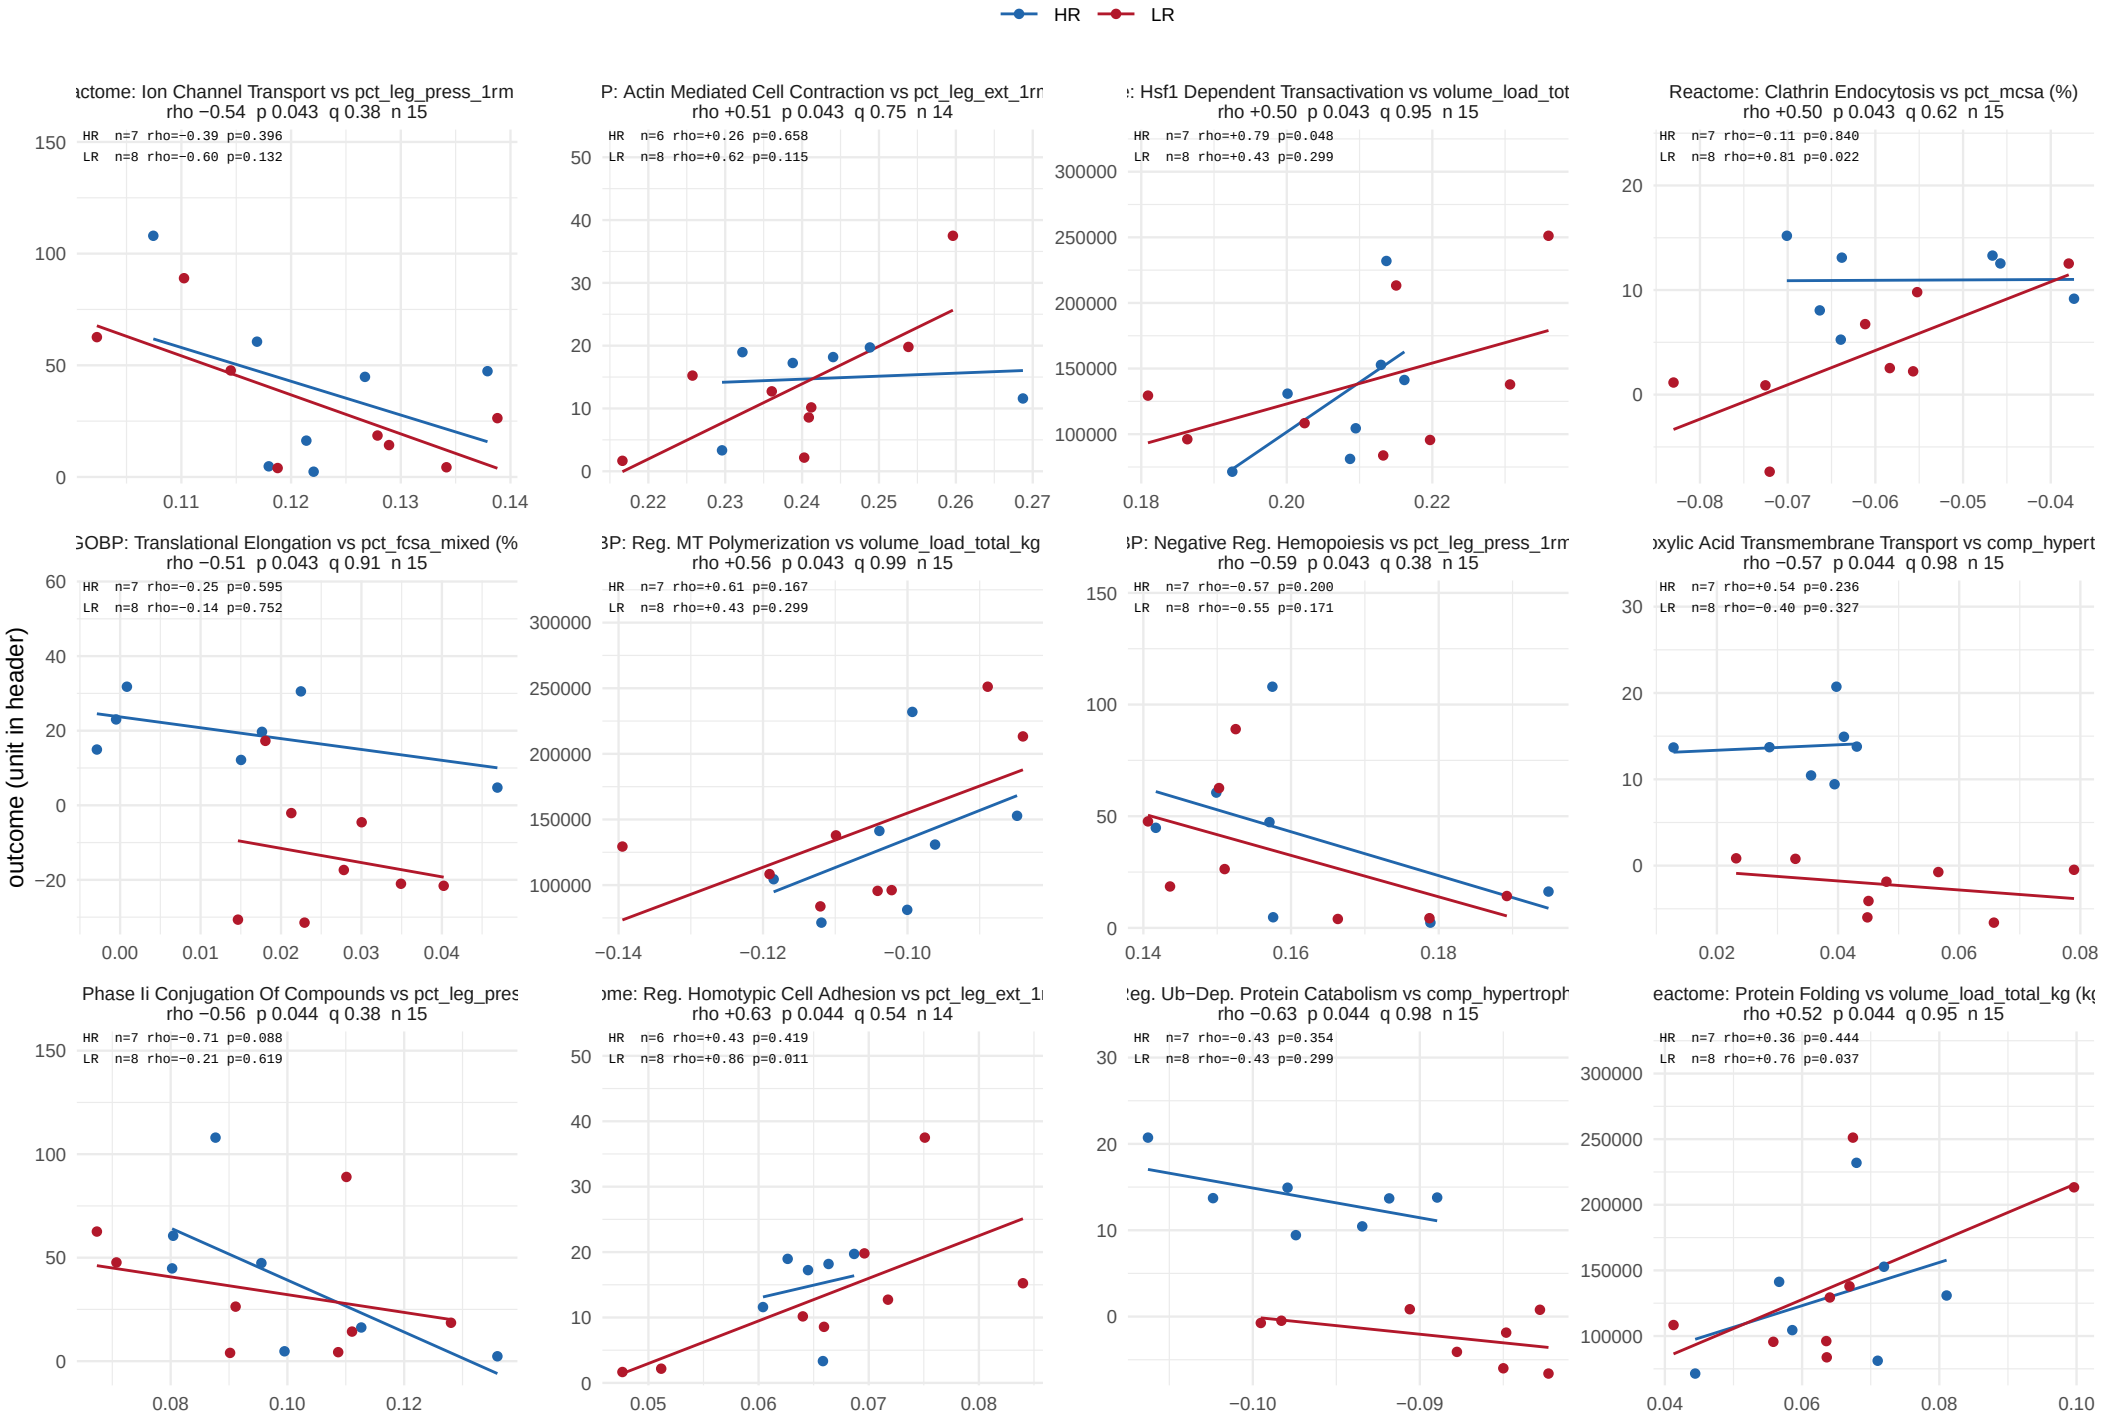

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


418 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 31 of 35.

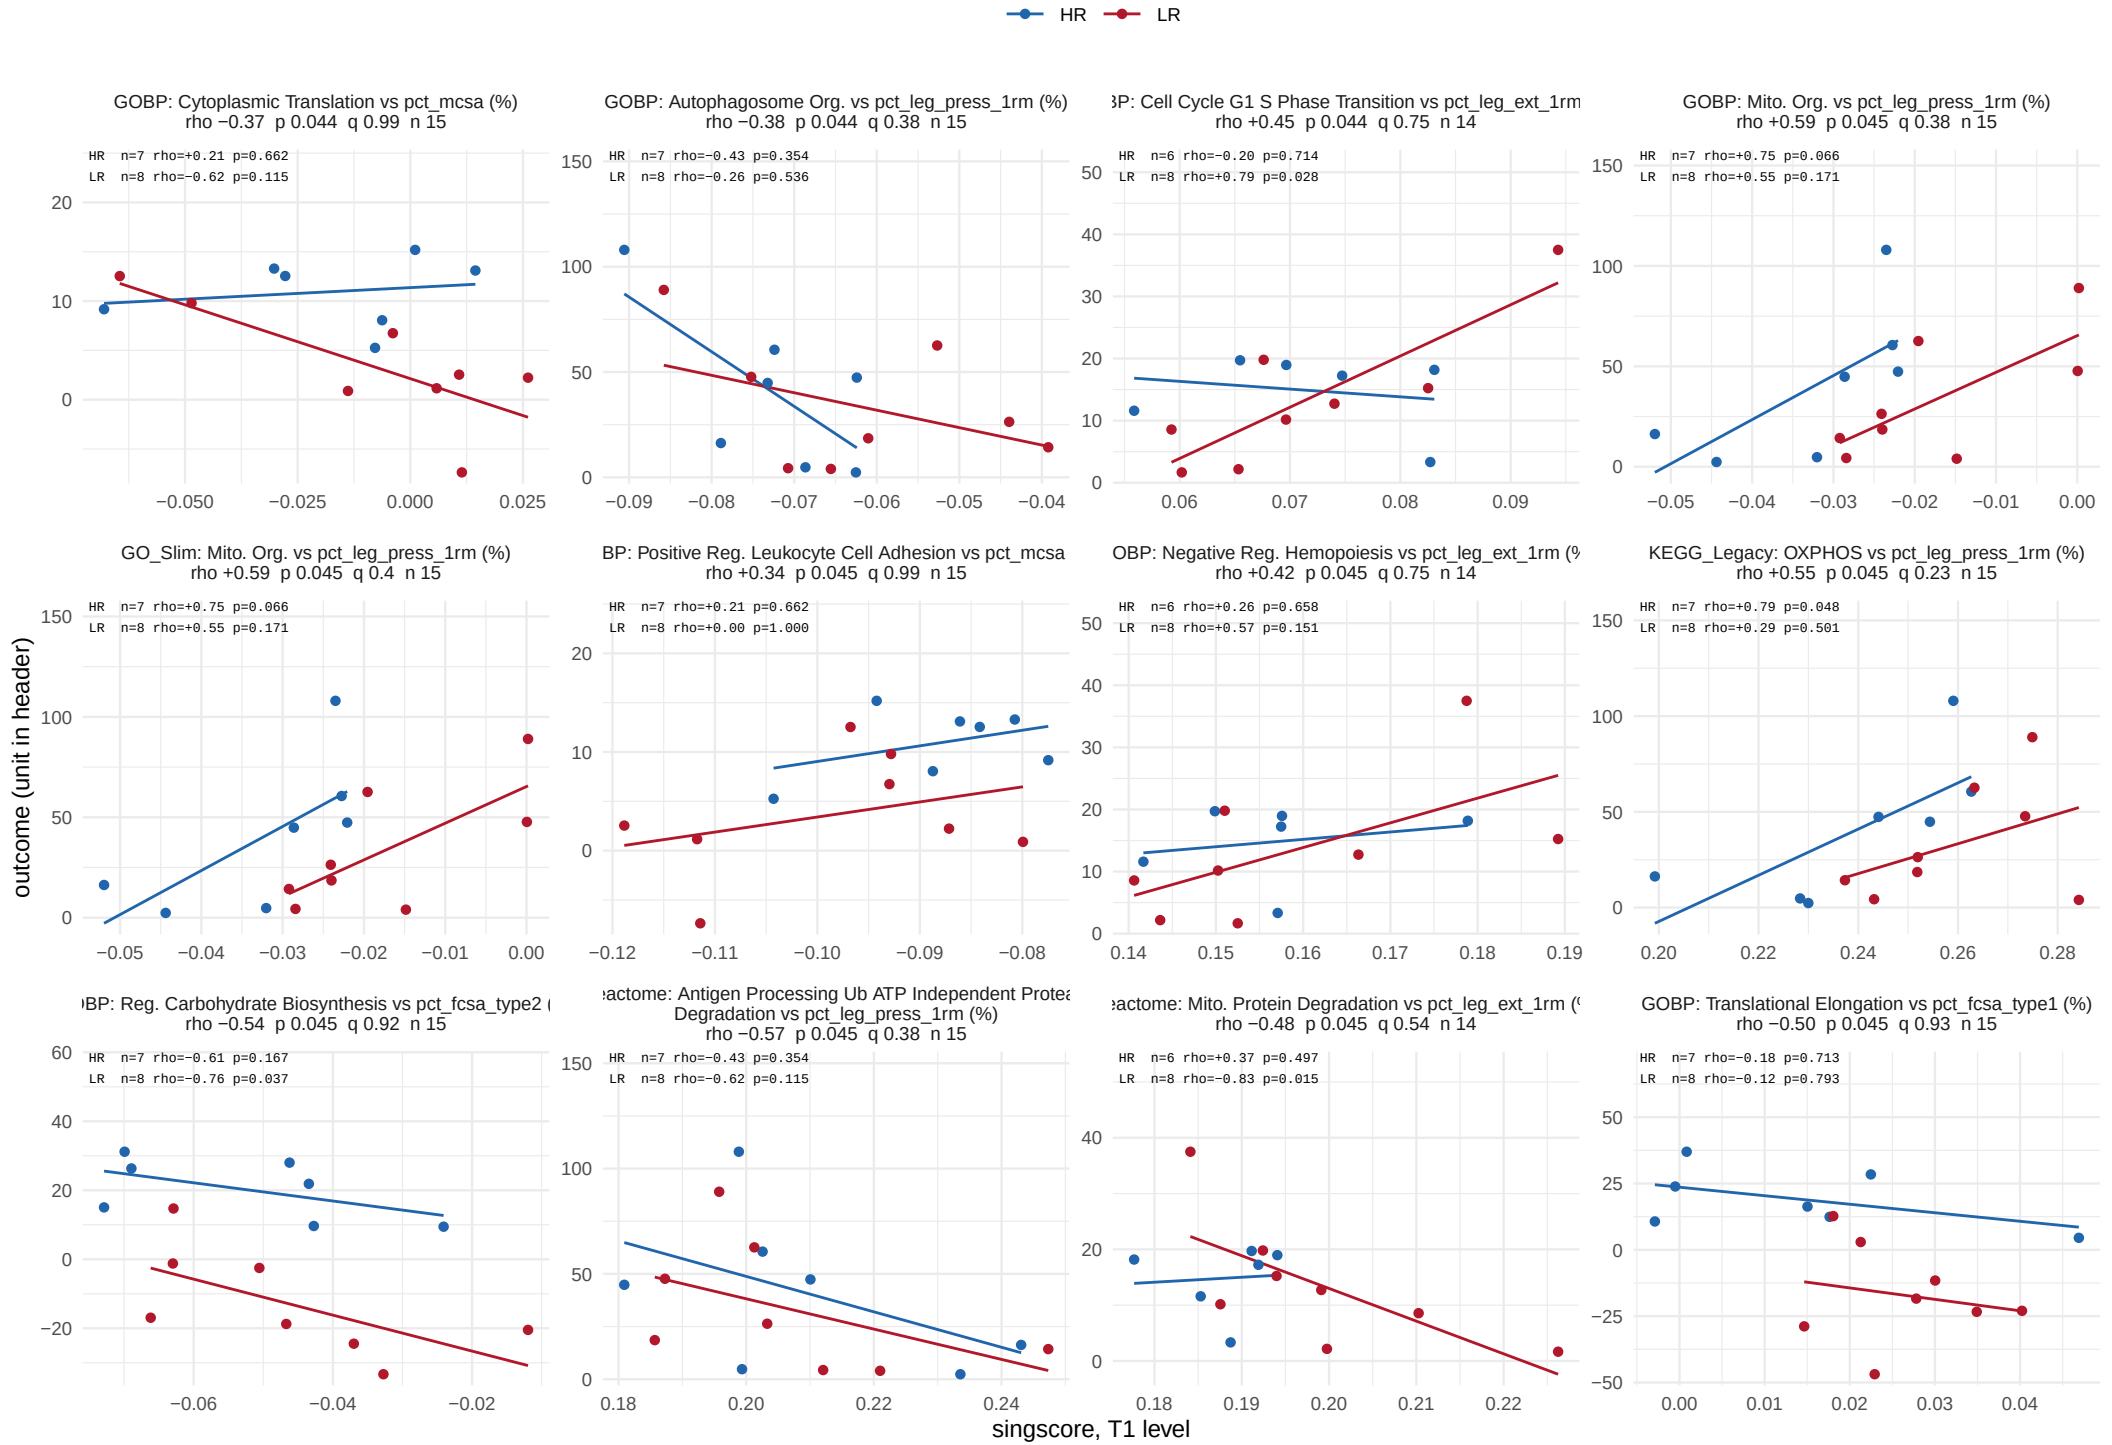

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


418 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 32 of 35.

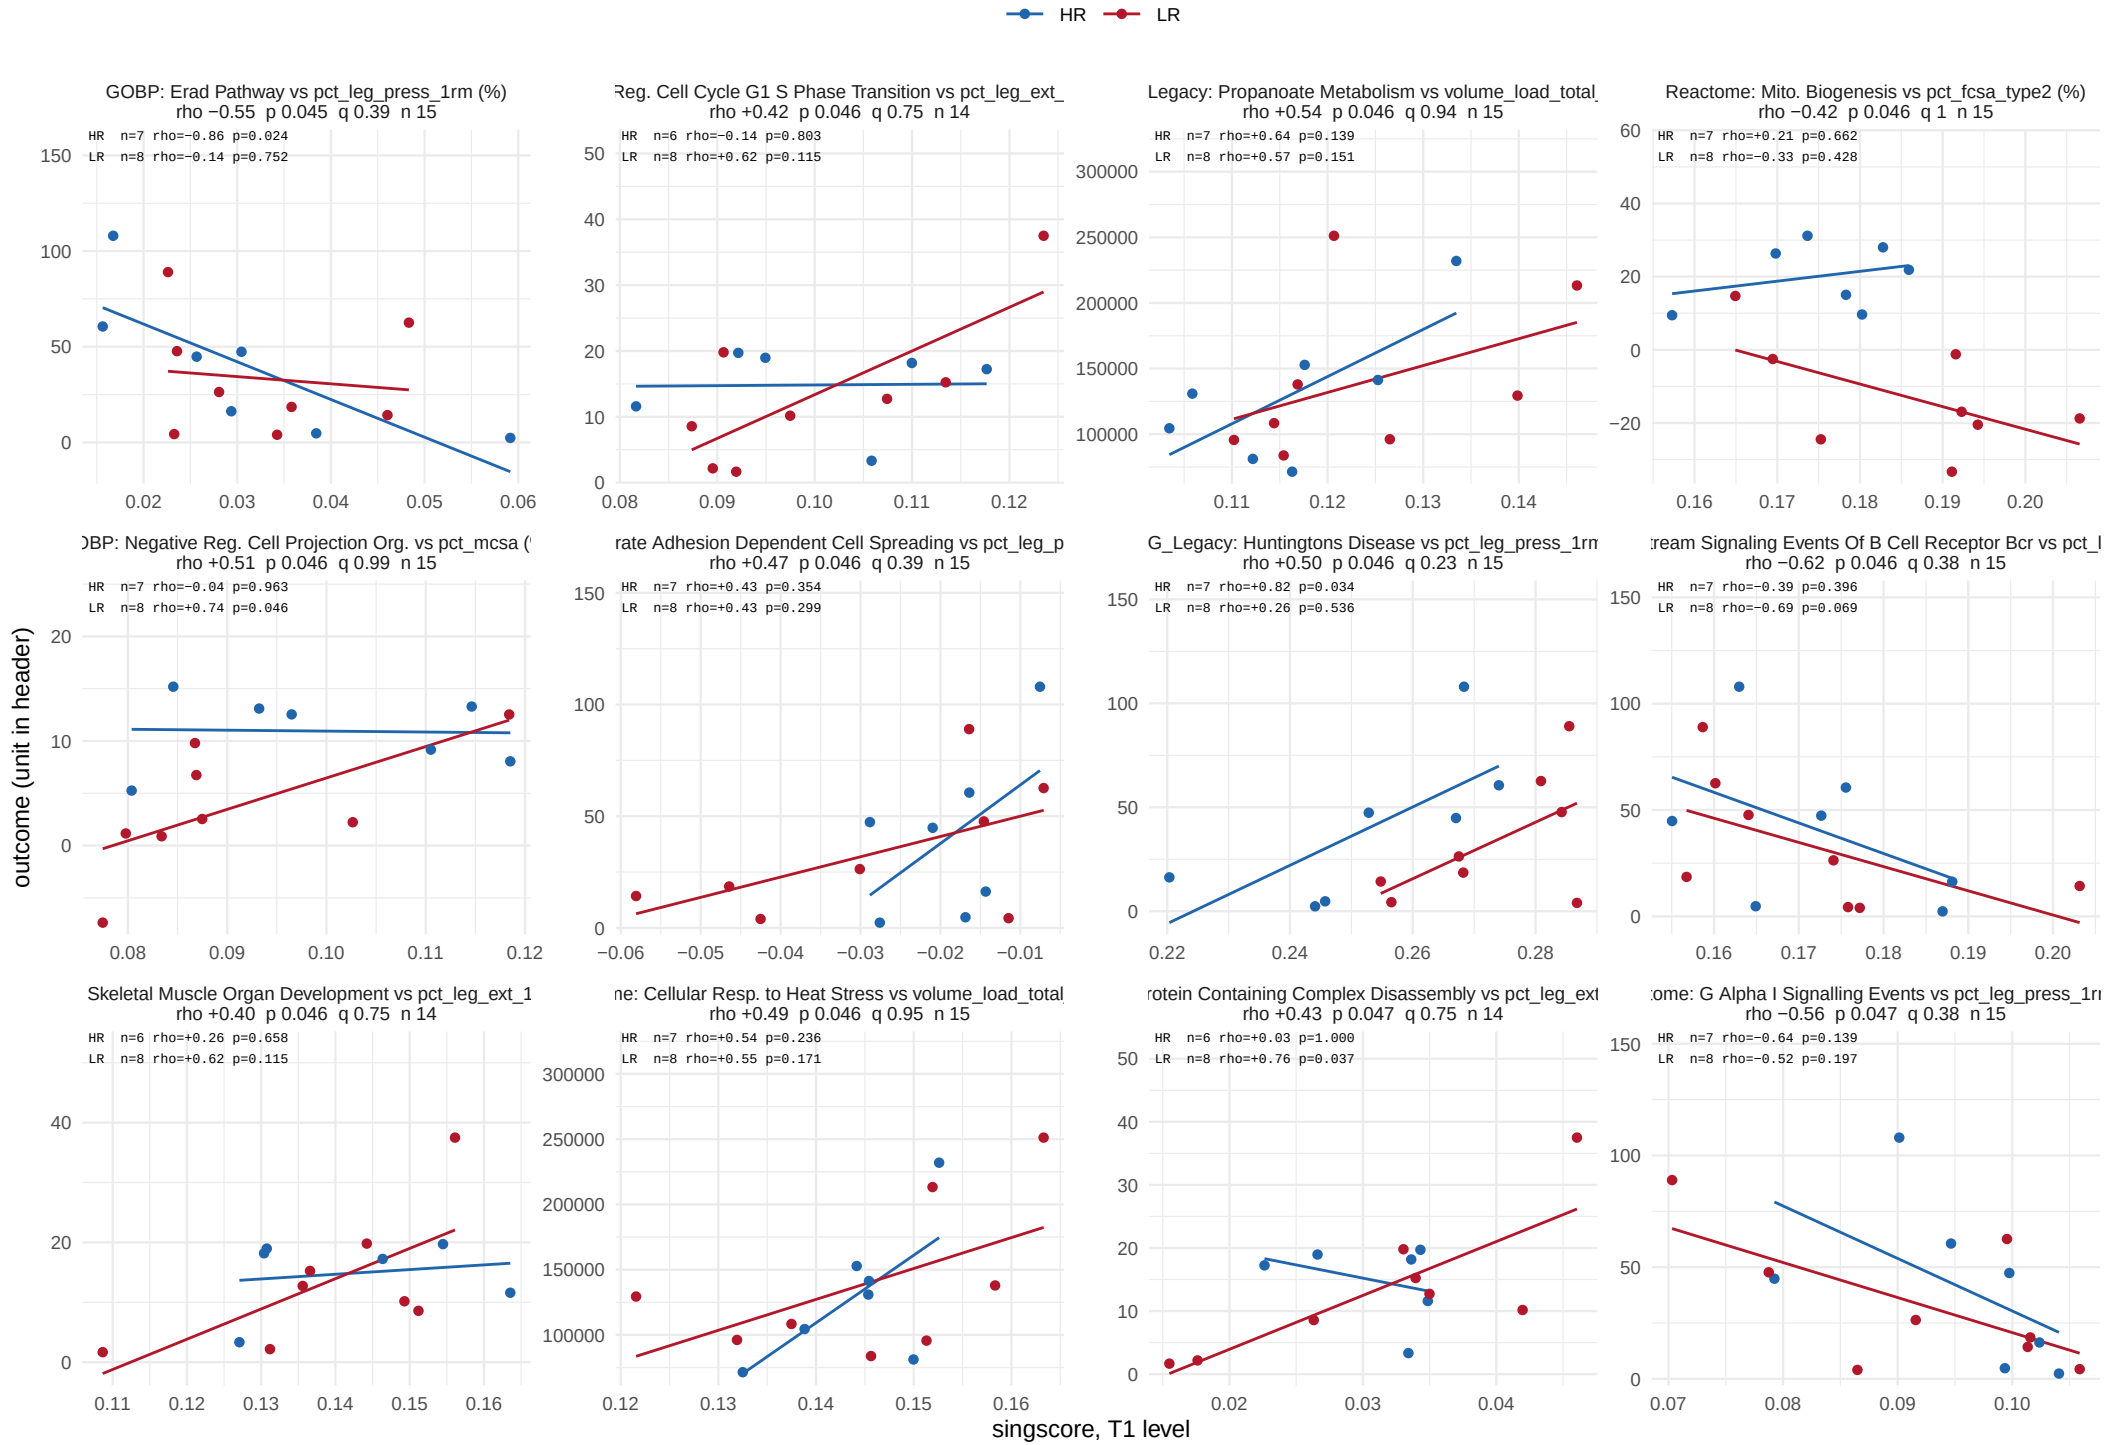

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


418 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 33 of 35.

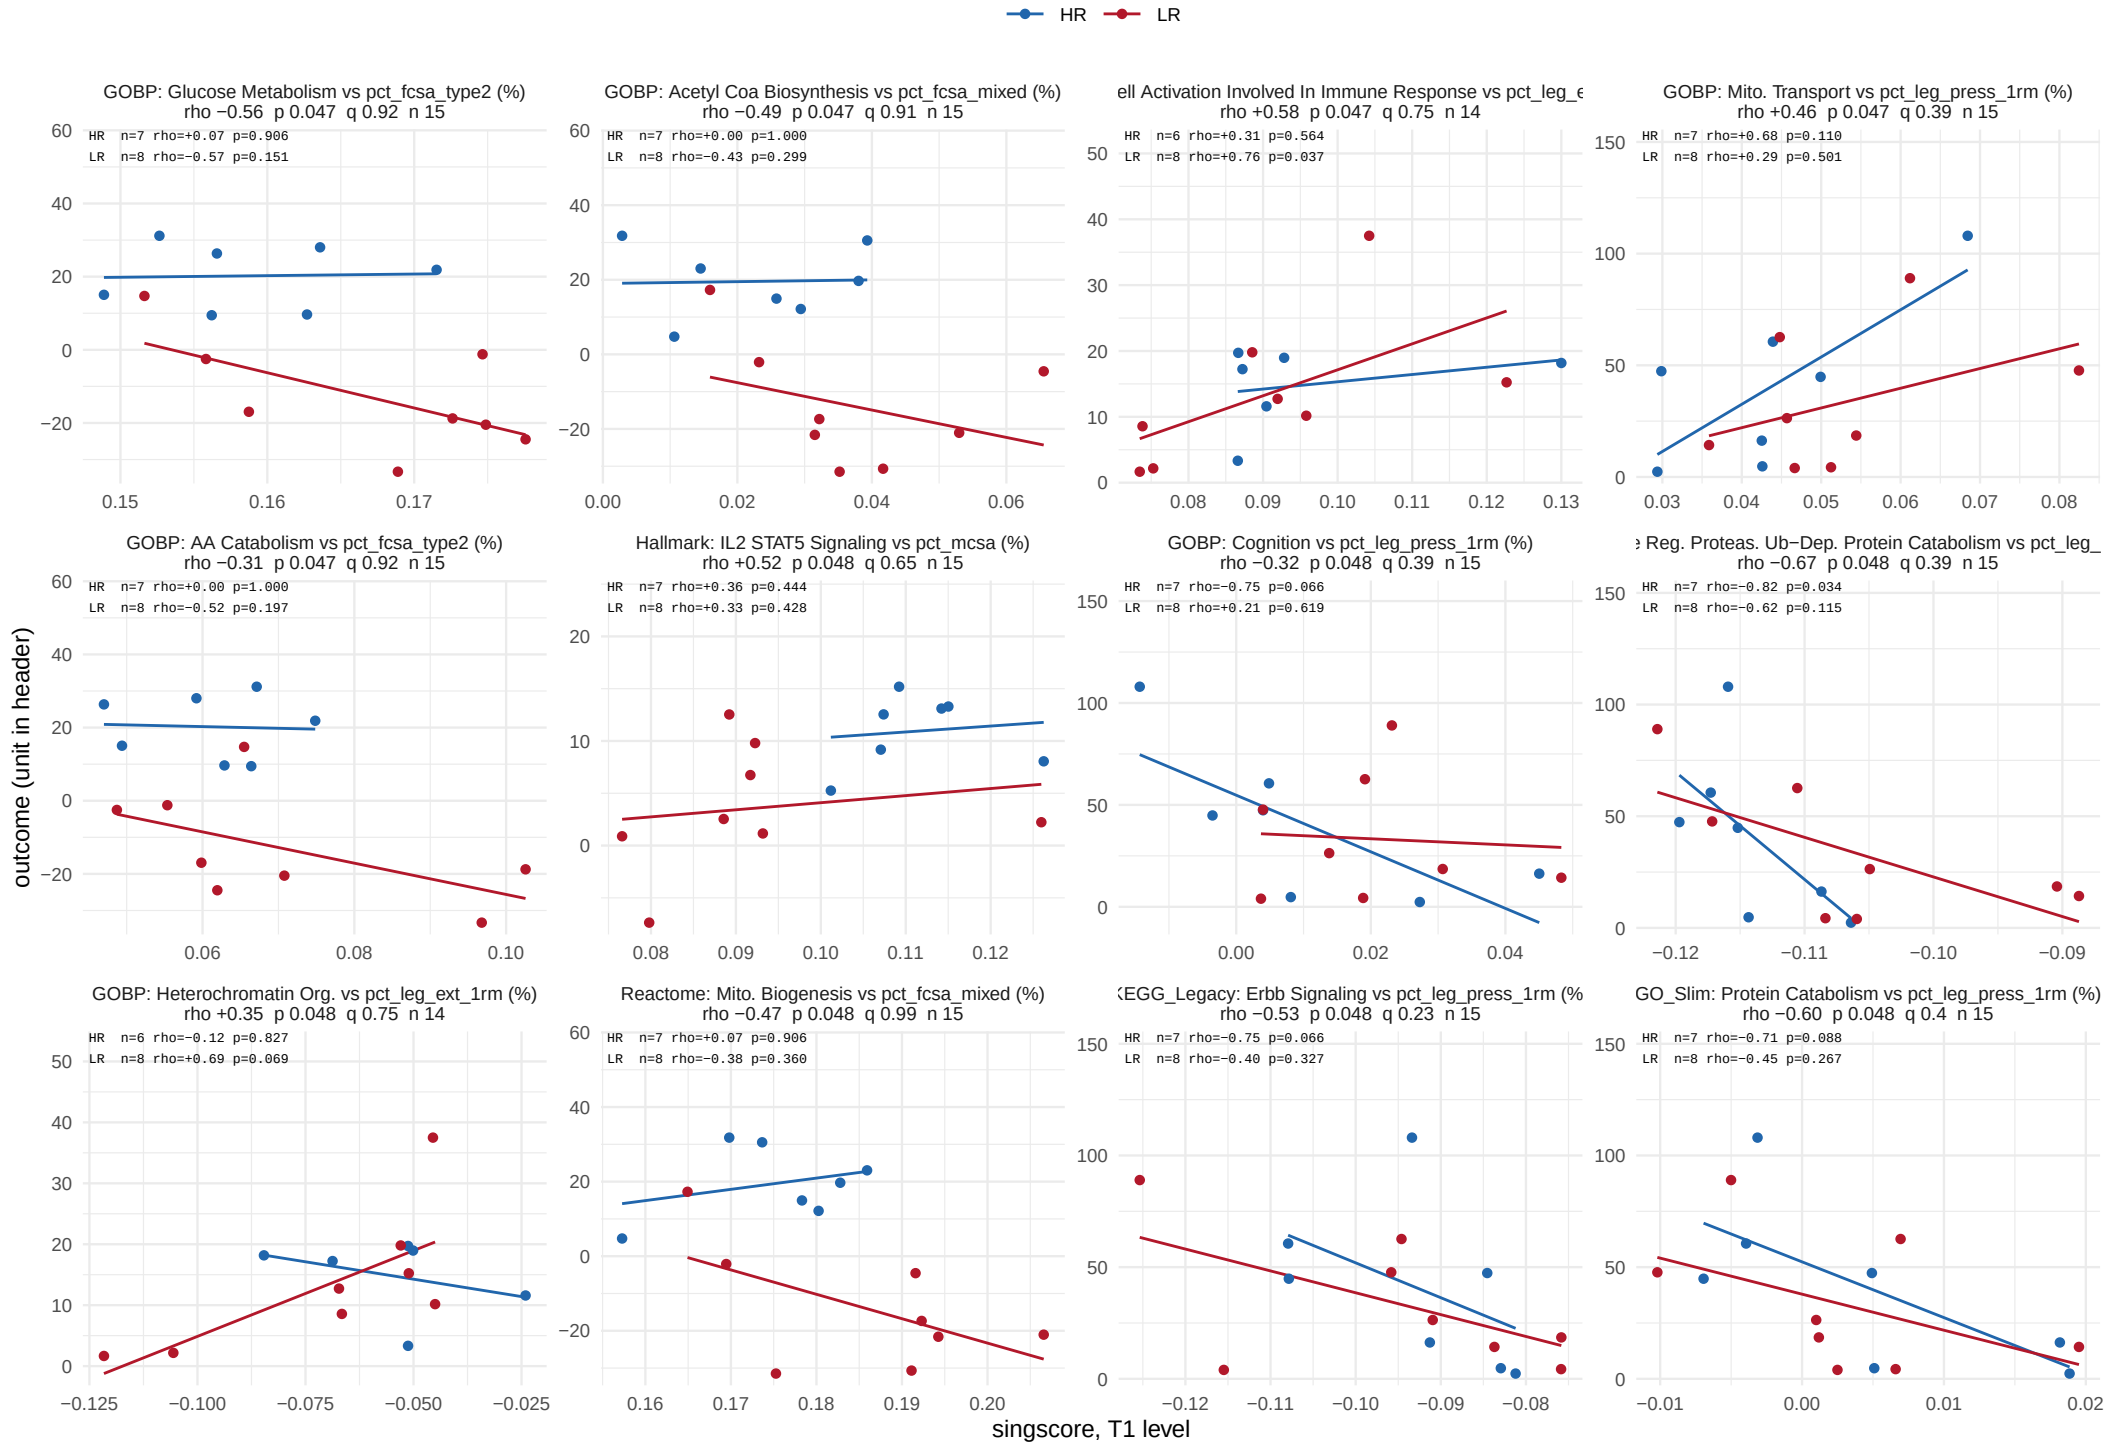

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


418 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 34 of 35.

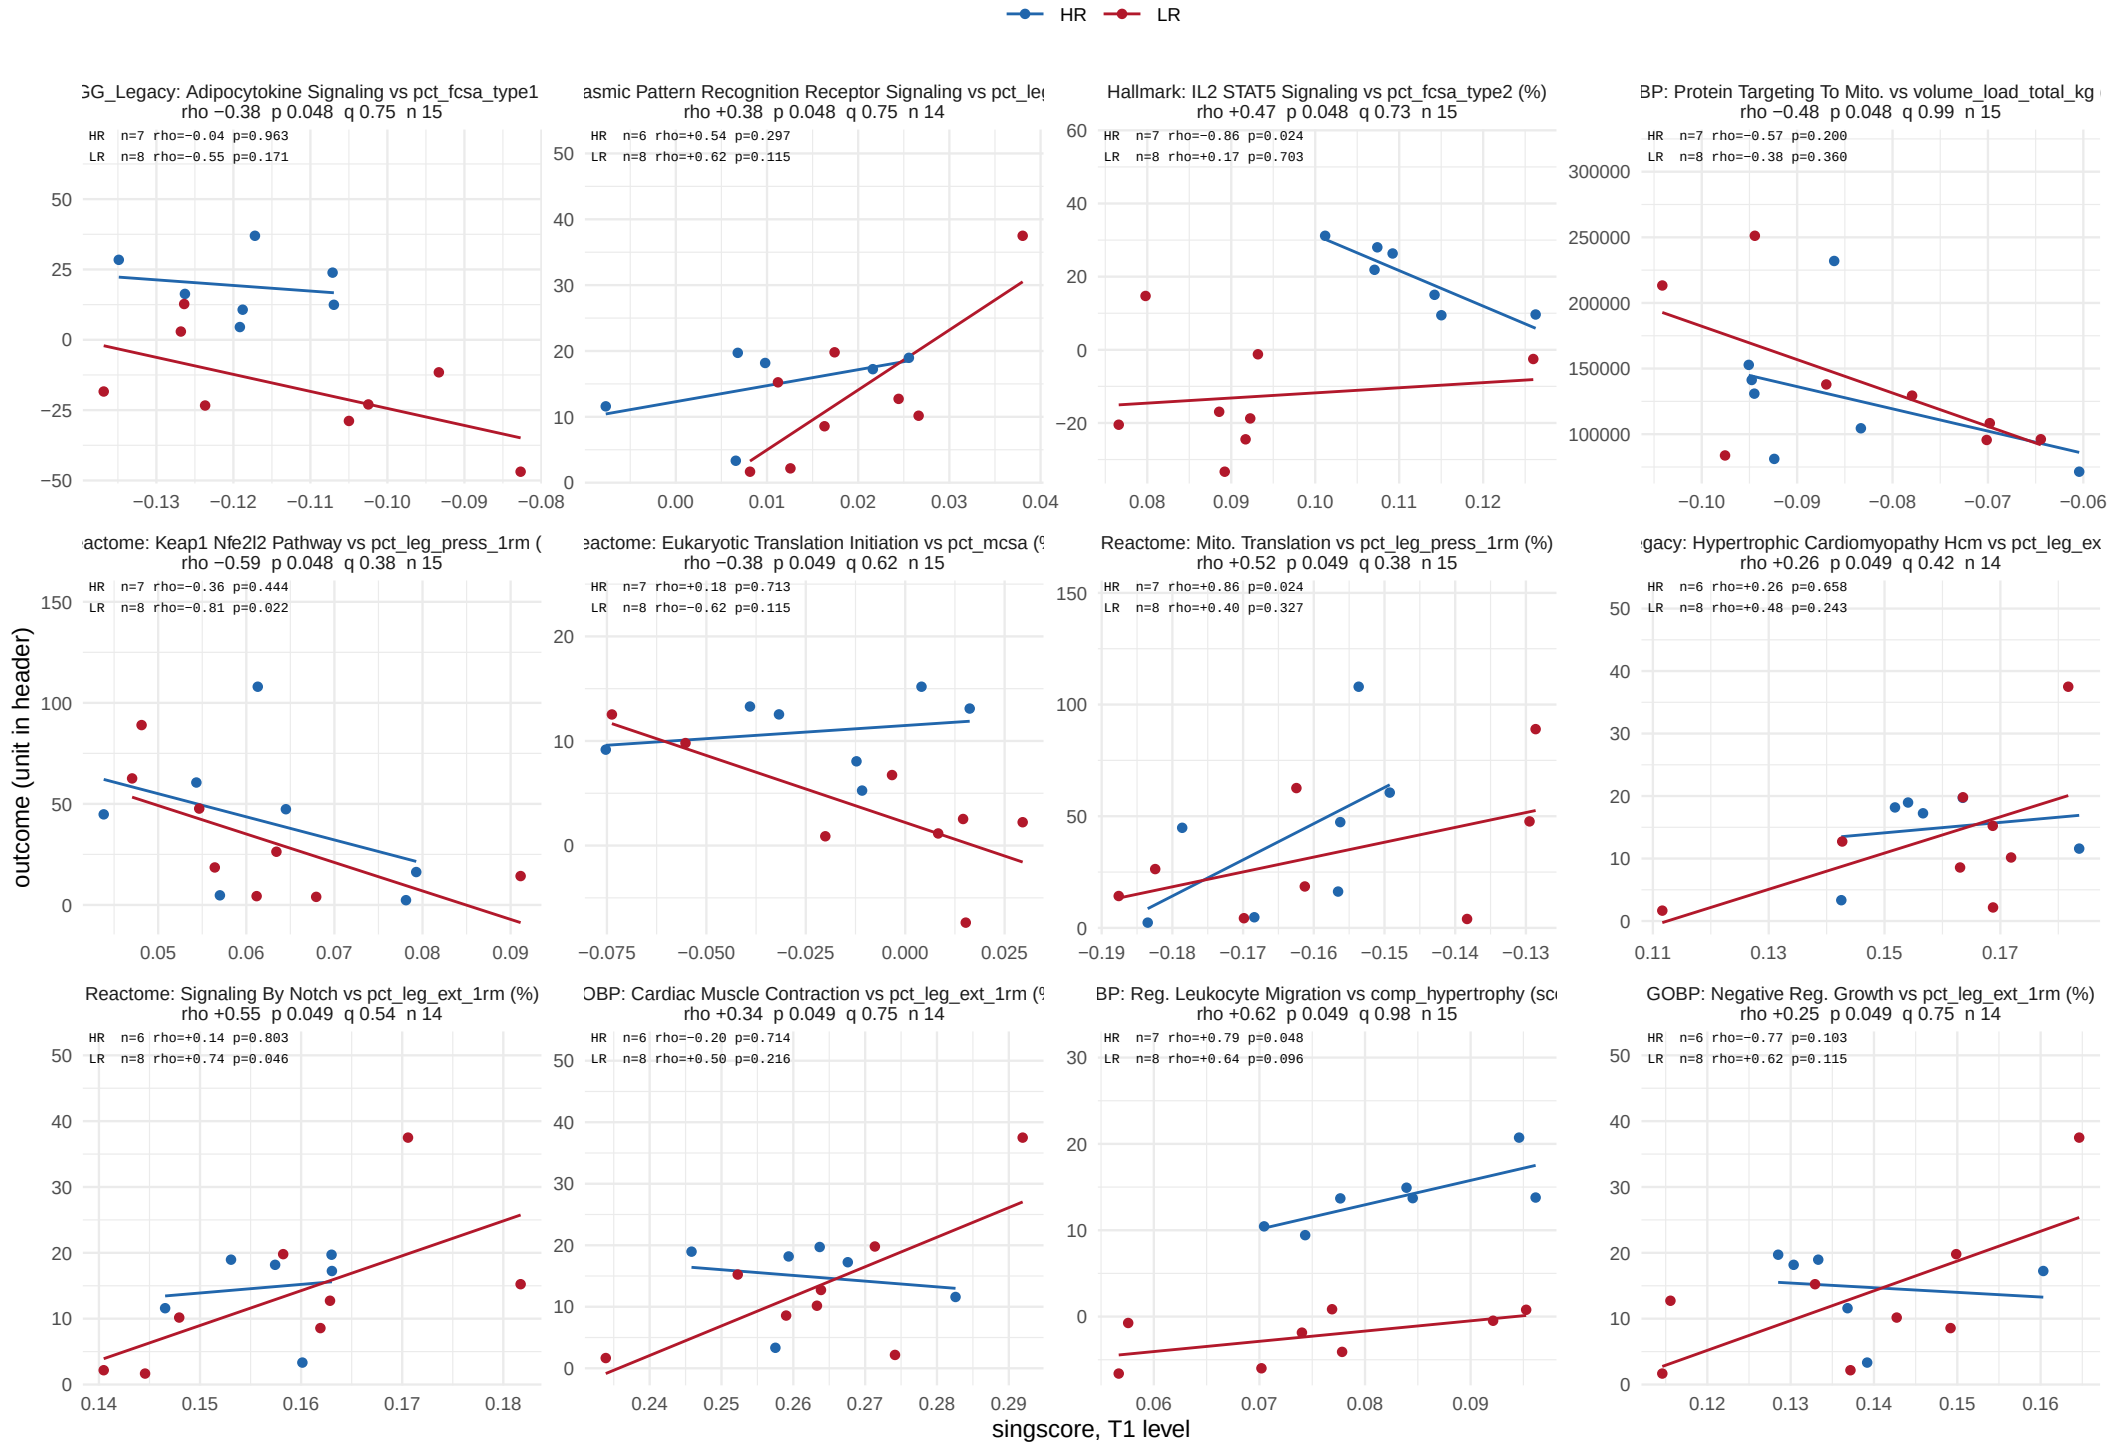

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


418 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 35 of 35.

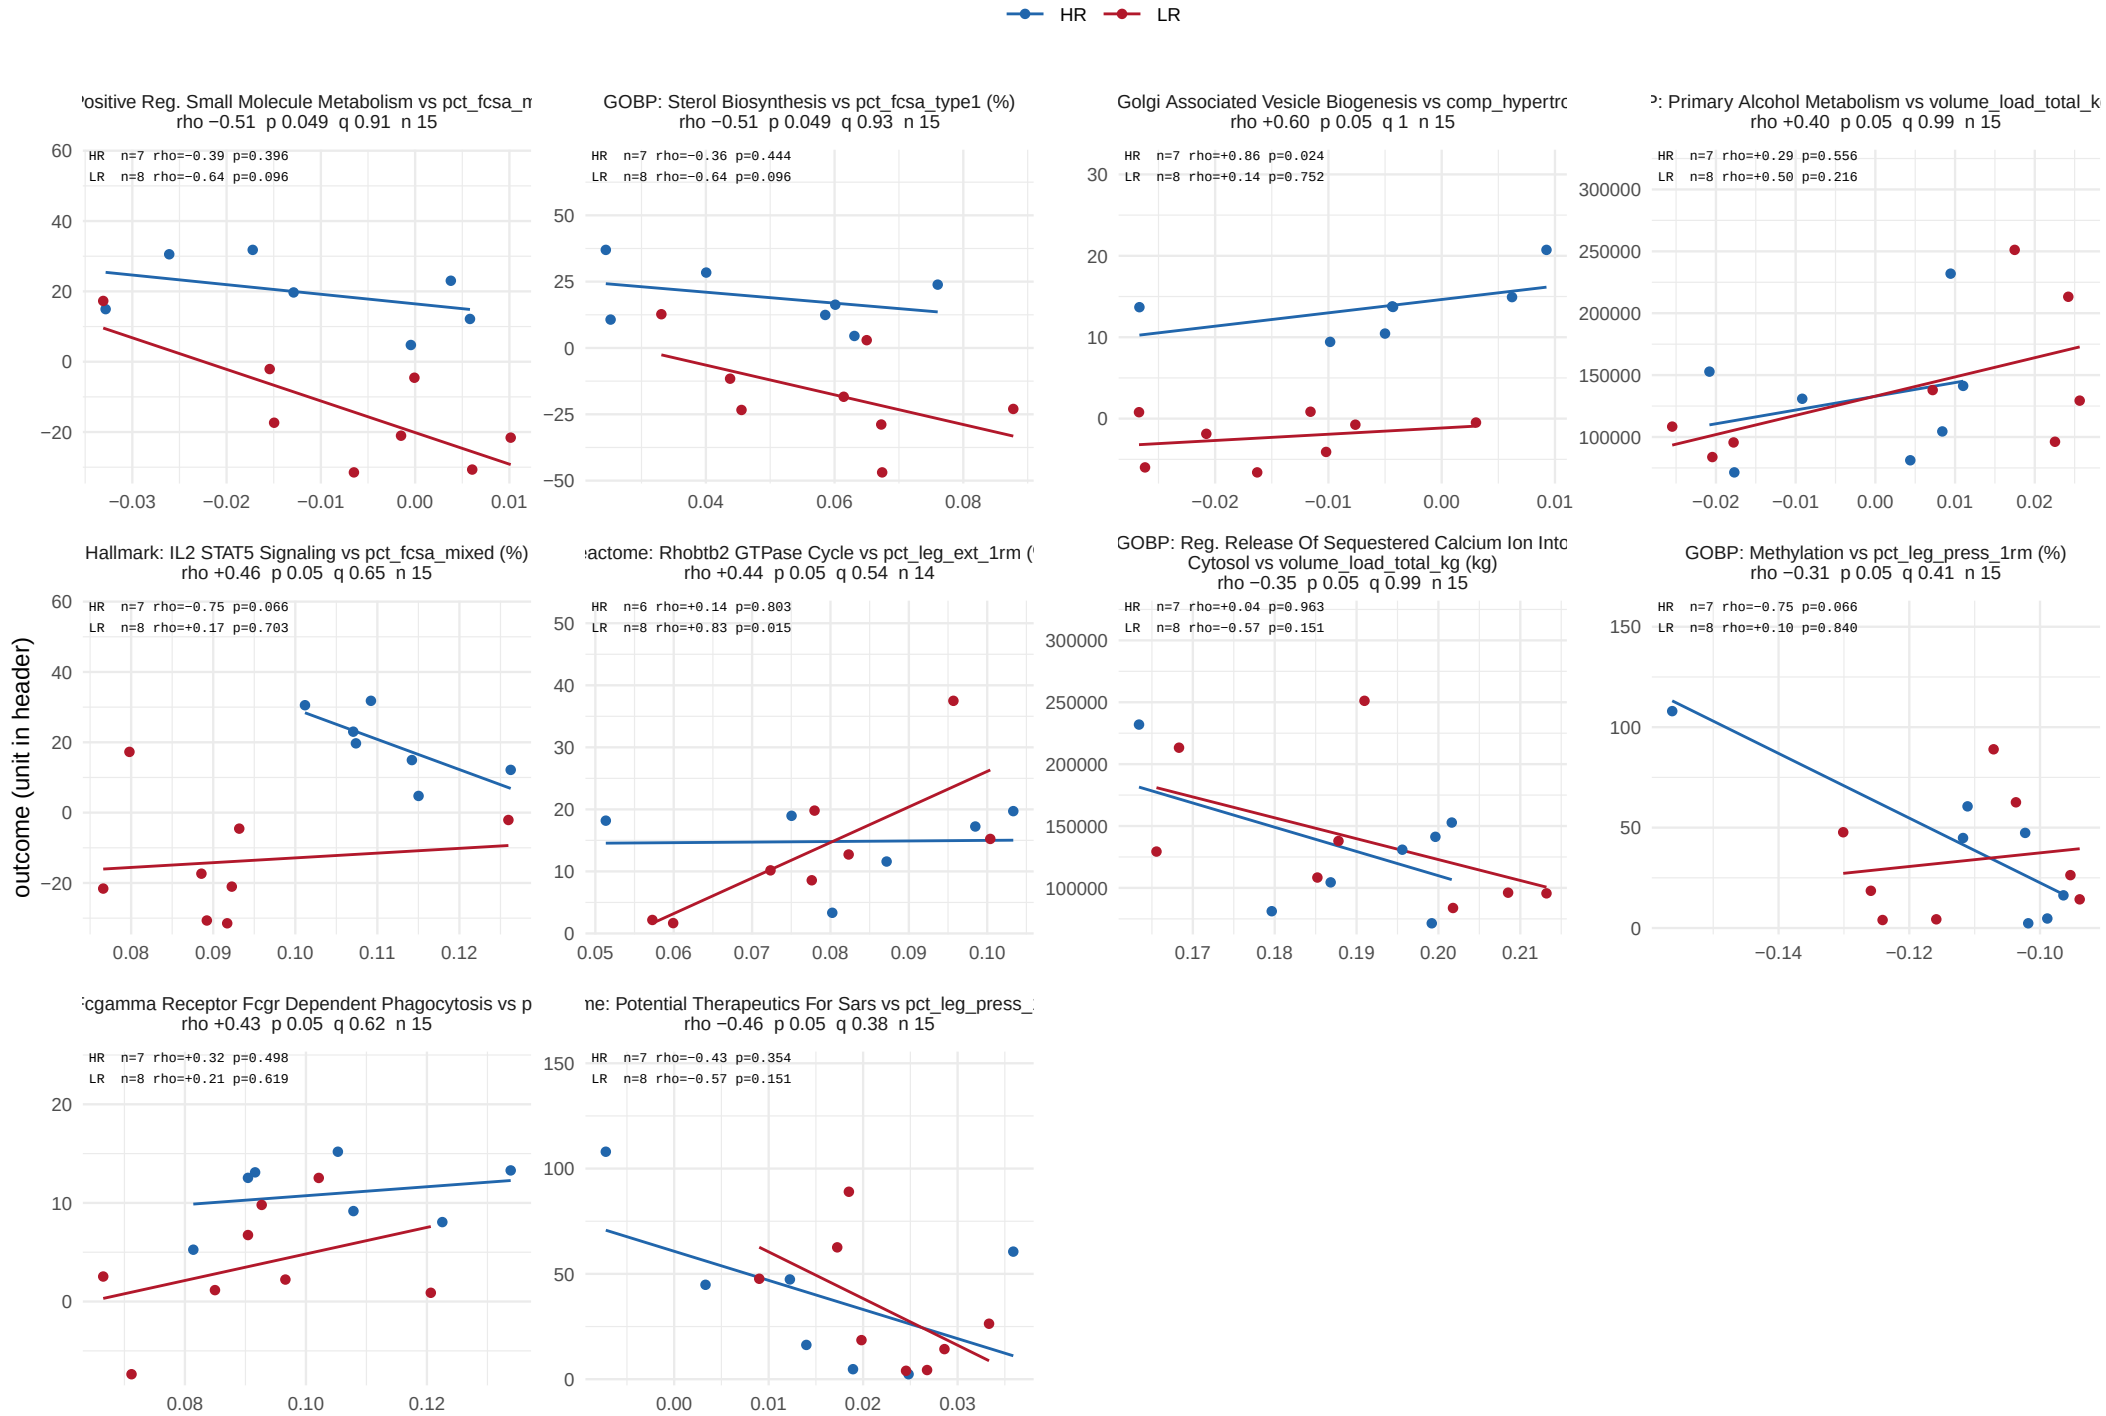

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


494 of 11024 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 1 of 42.

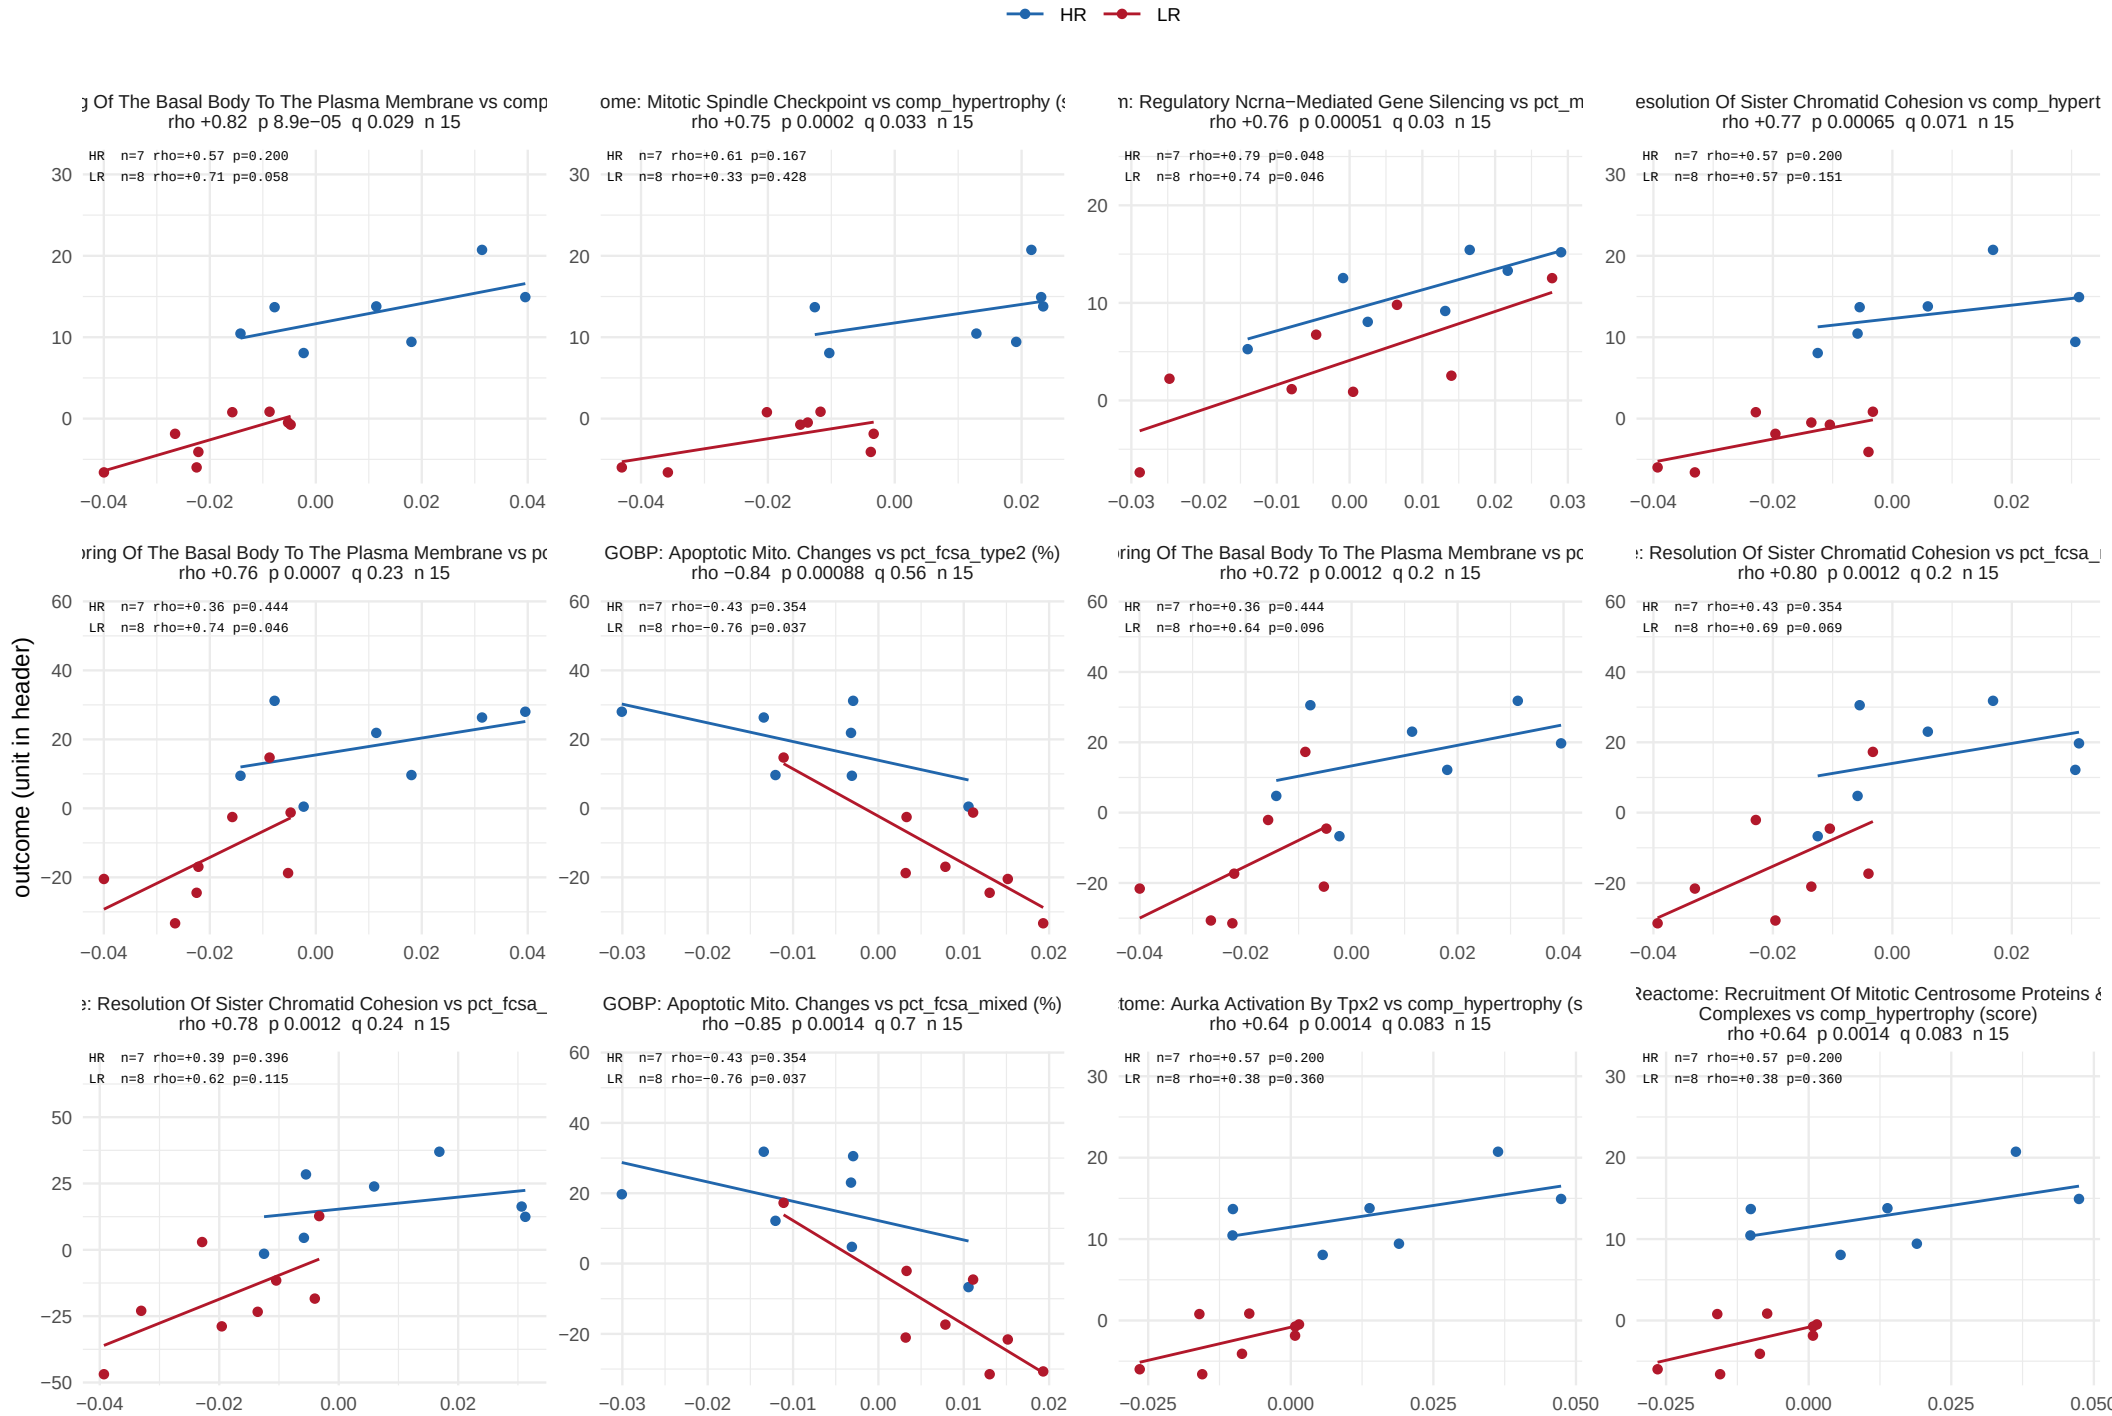

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


494 of 11024 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 2 of 42.

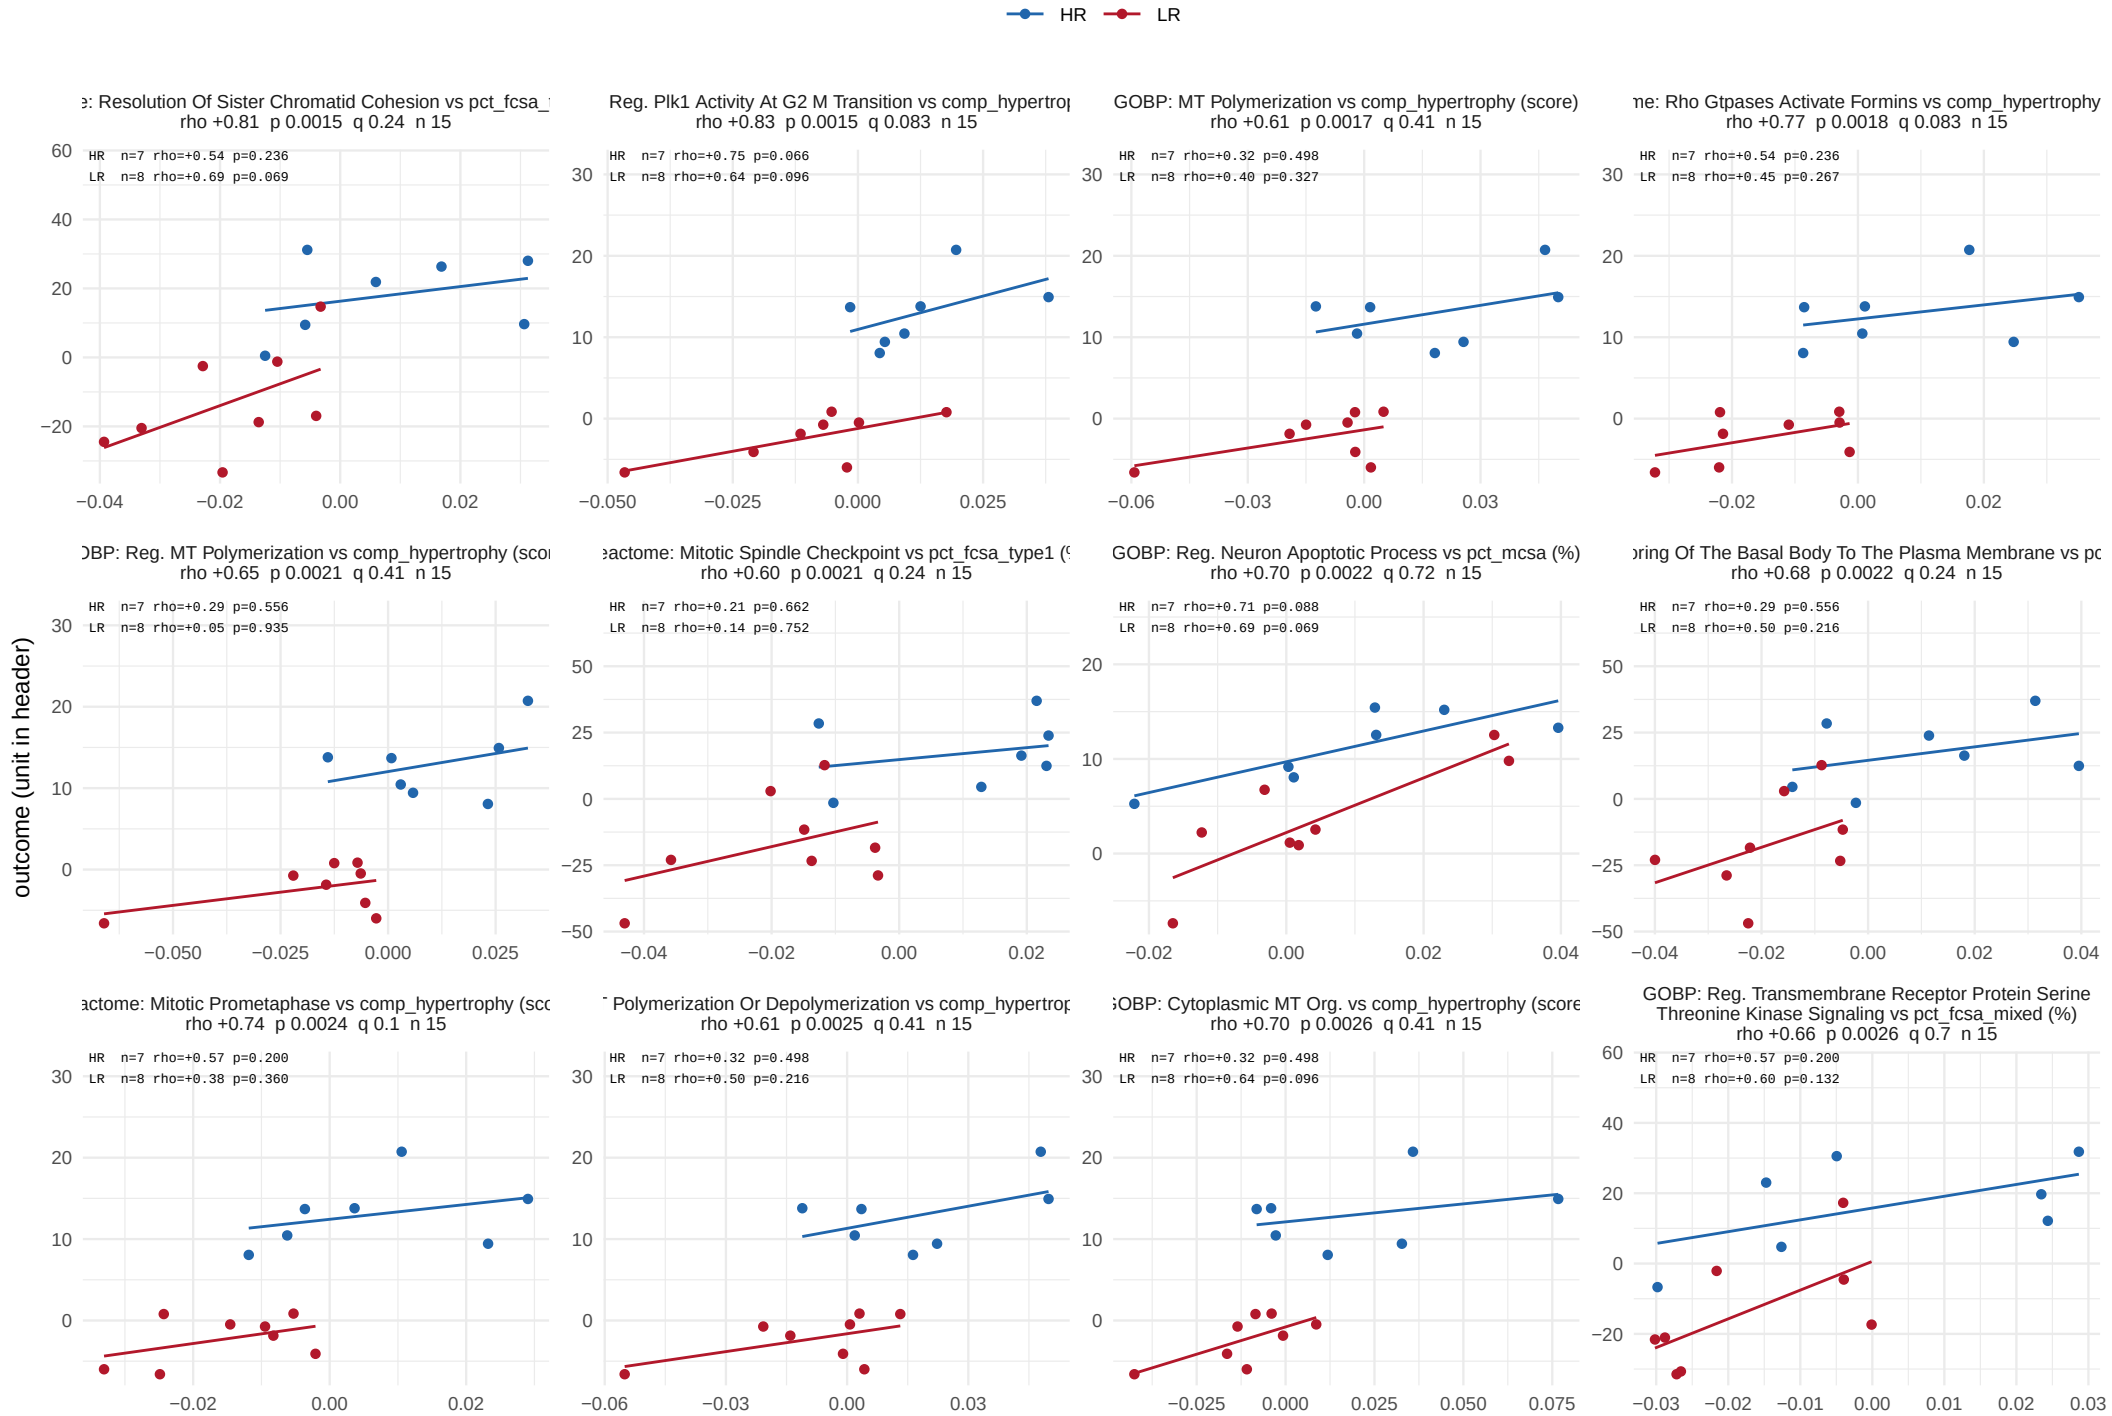

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


494 of 11024 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 3 of 42.

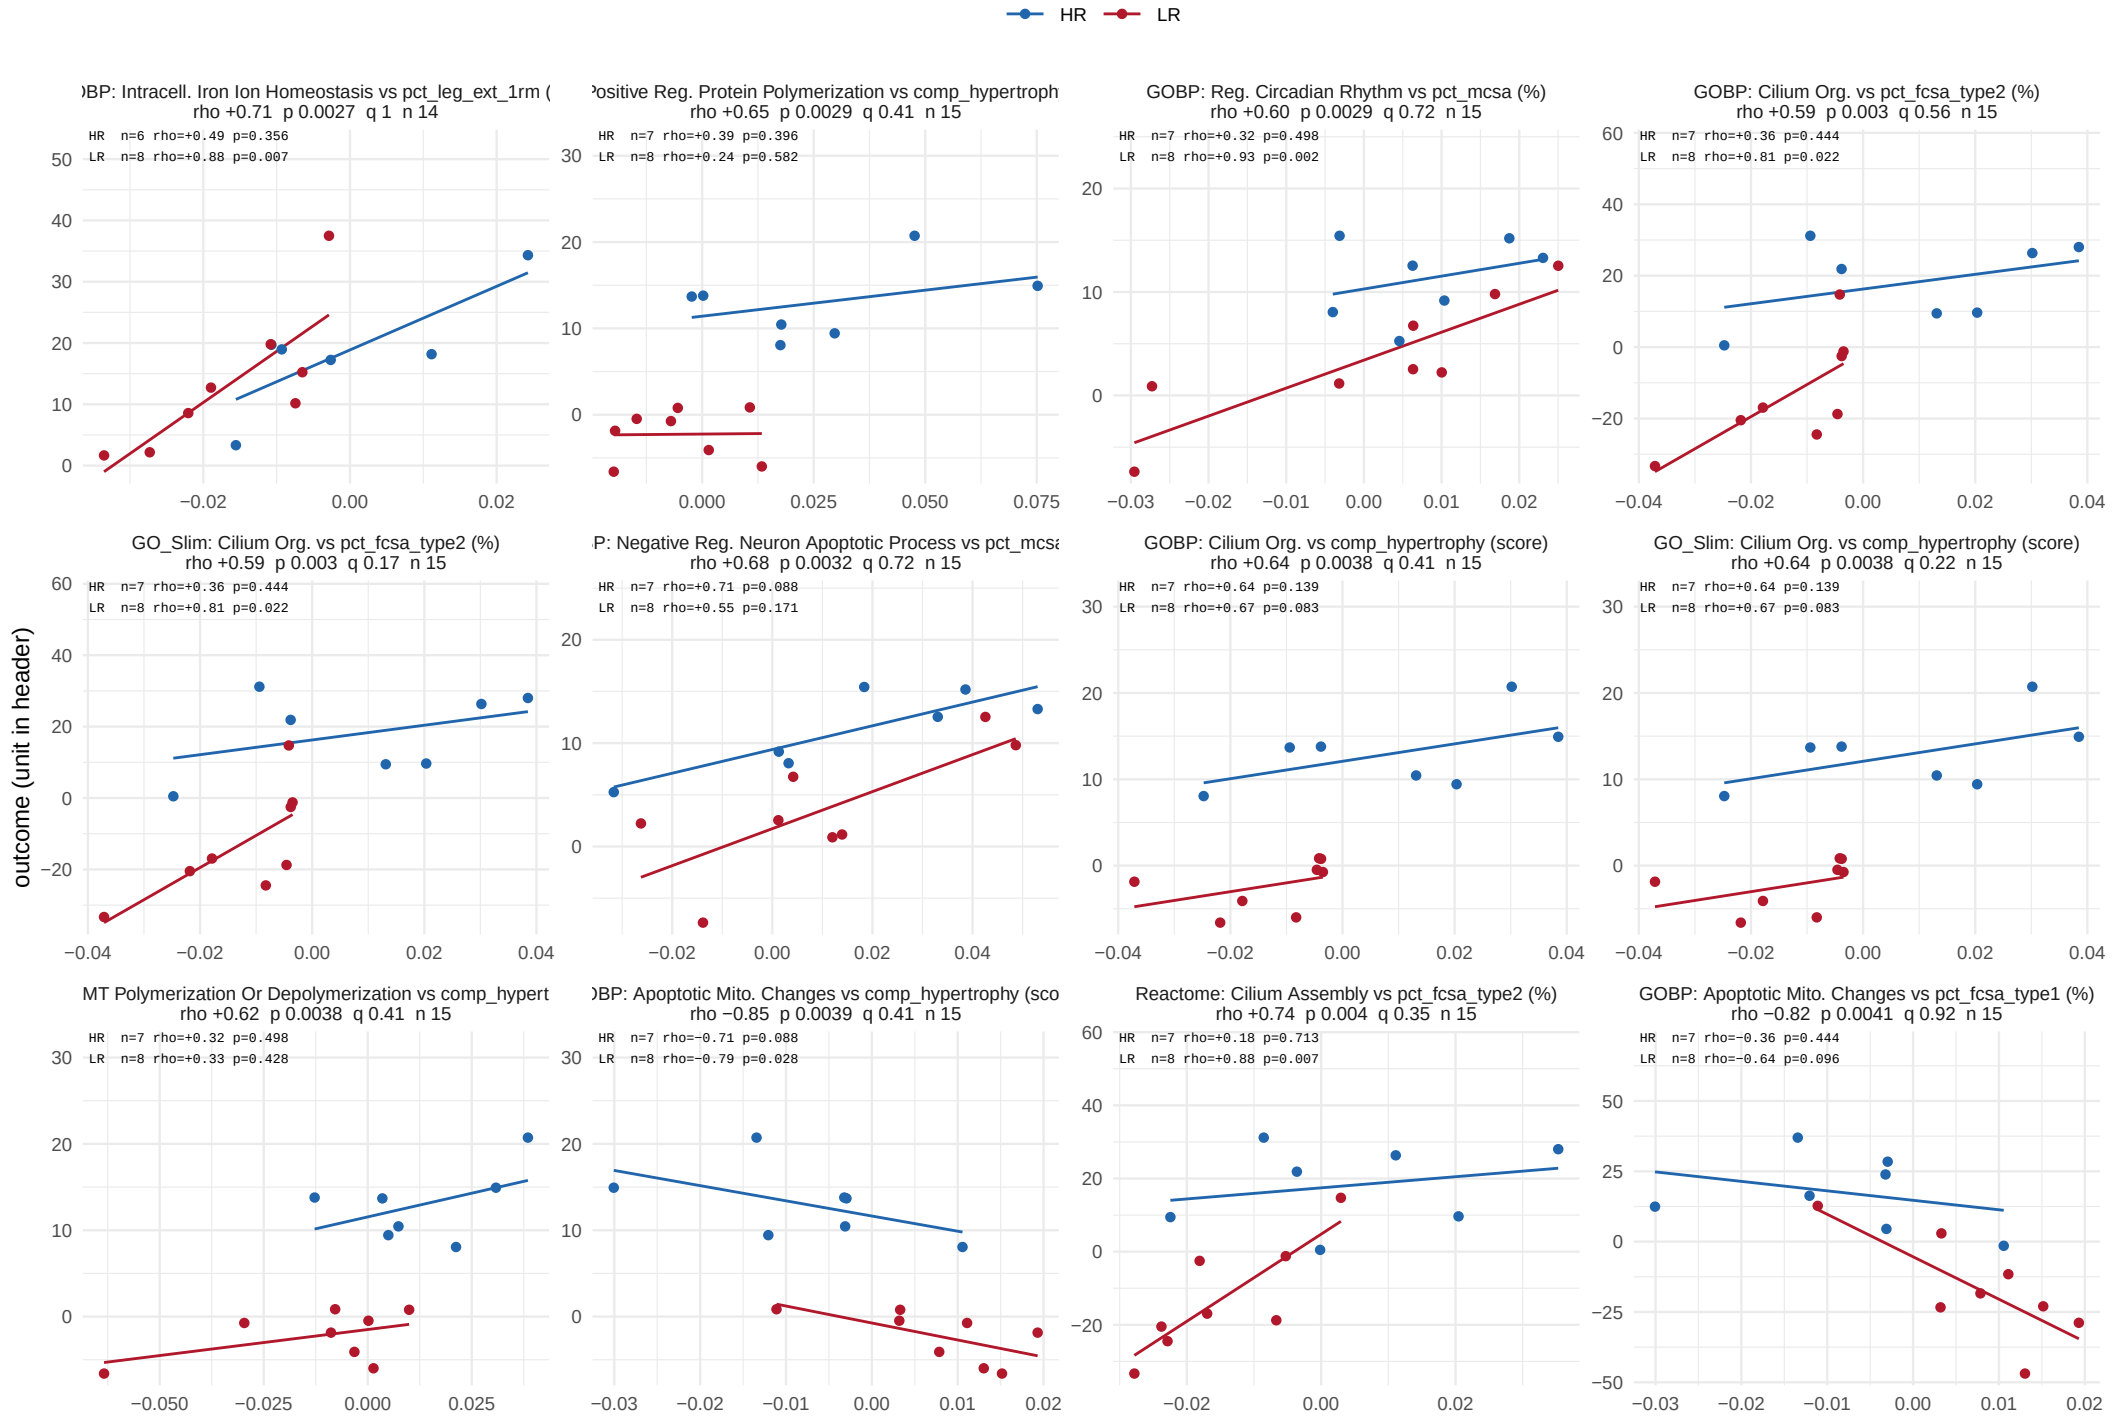

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


494 of 11024 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 4 of 42.

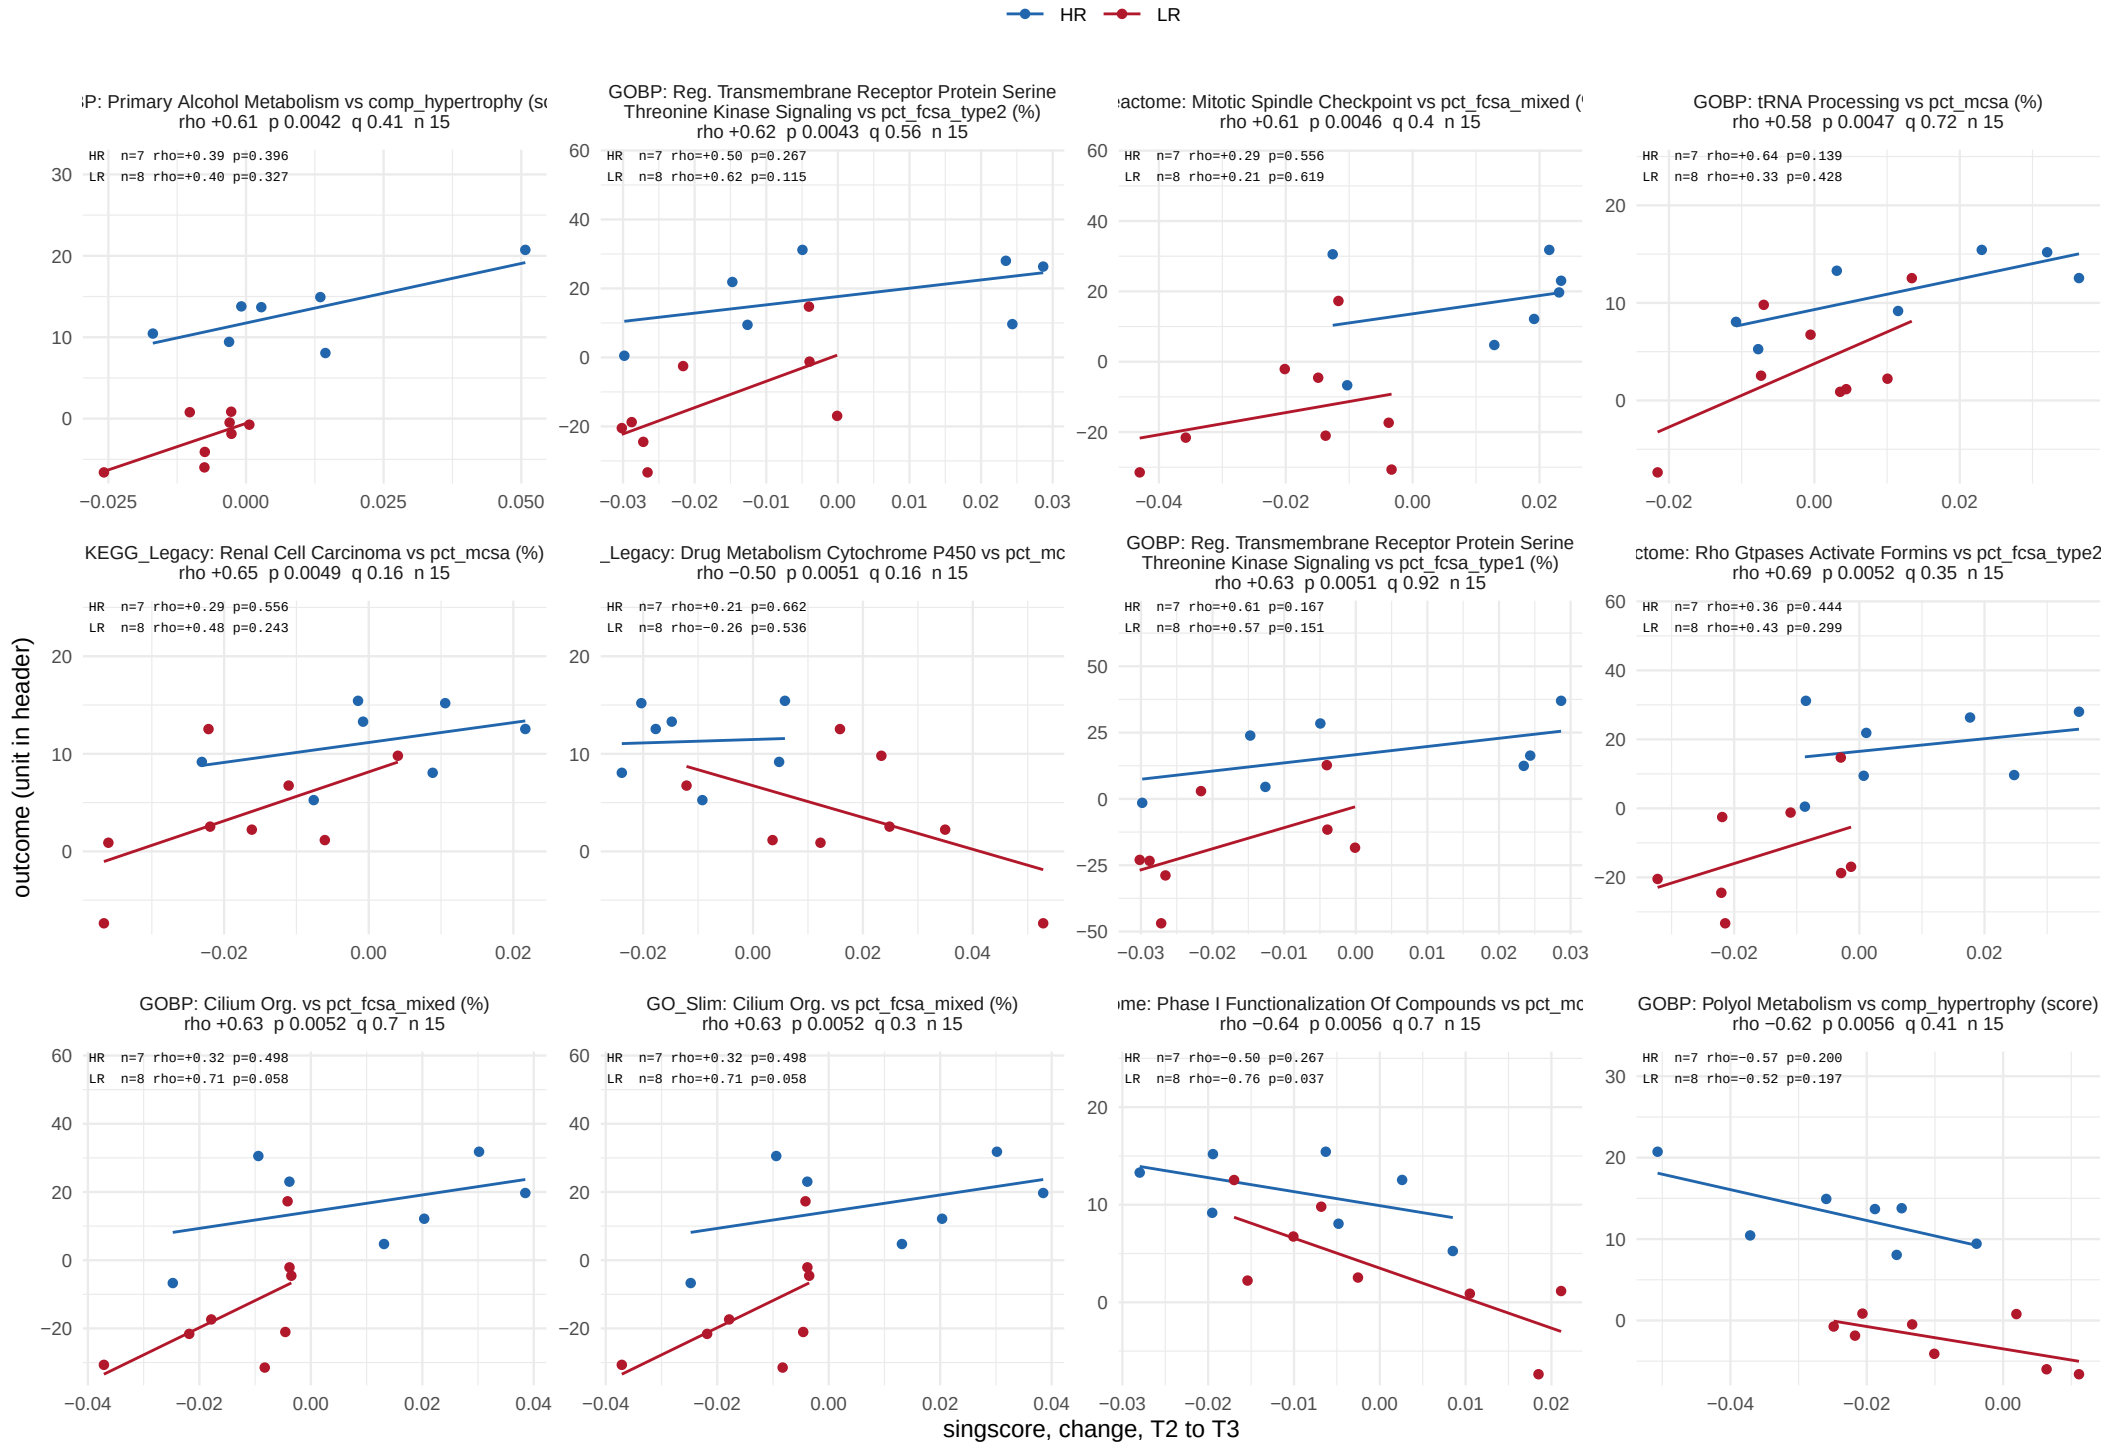

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


494 of 11024 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 5 of 42.

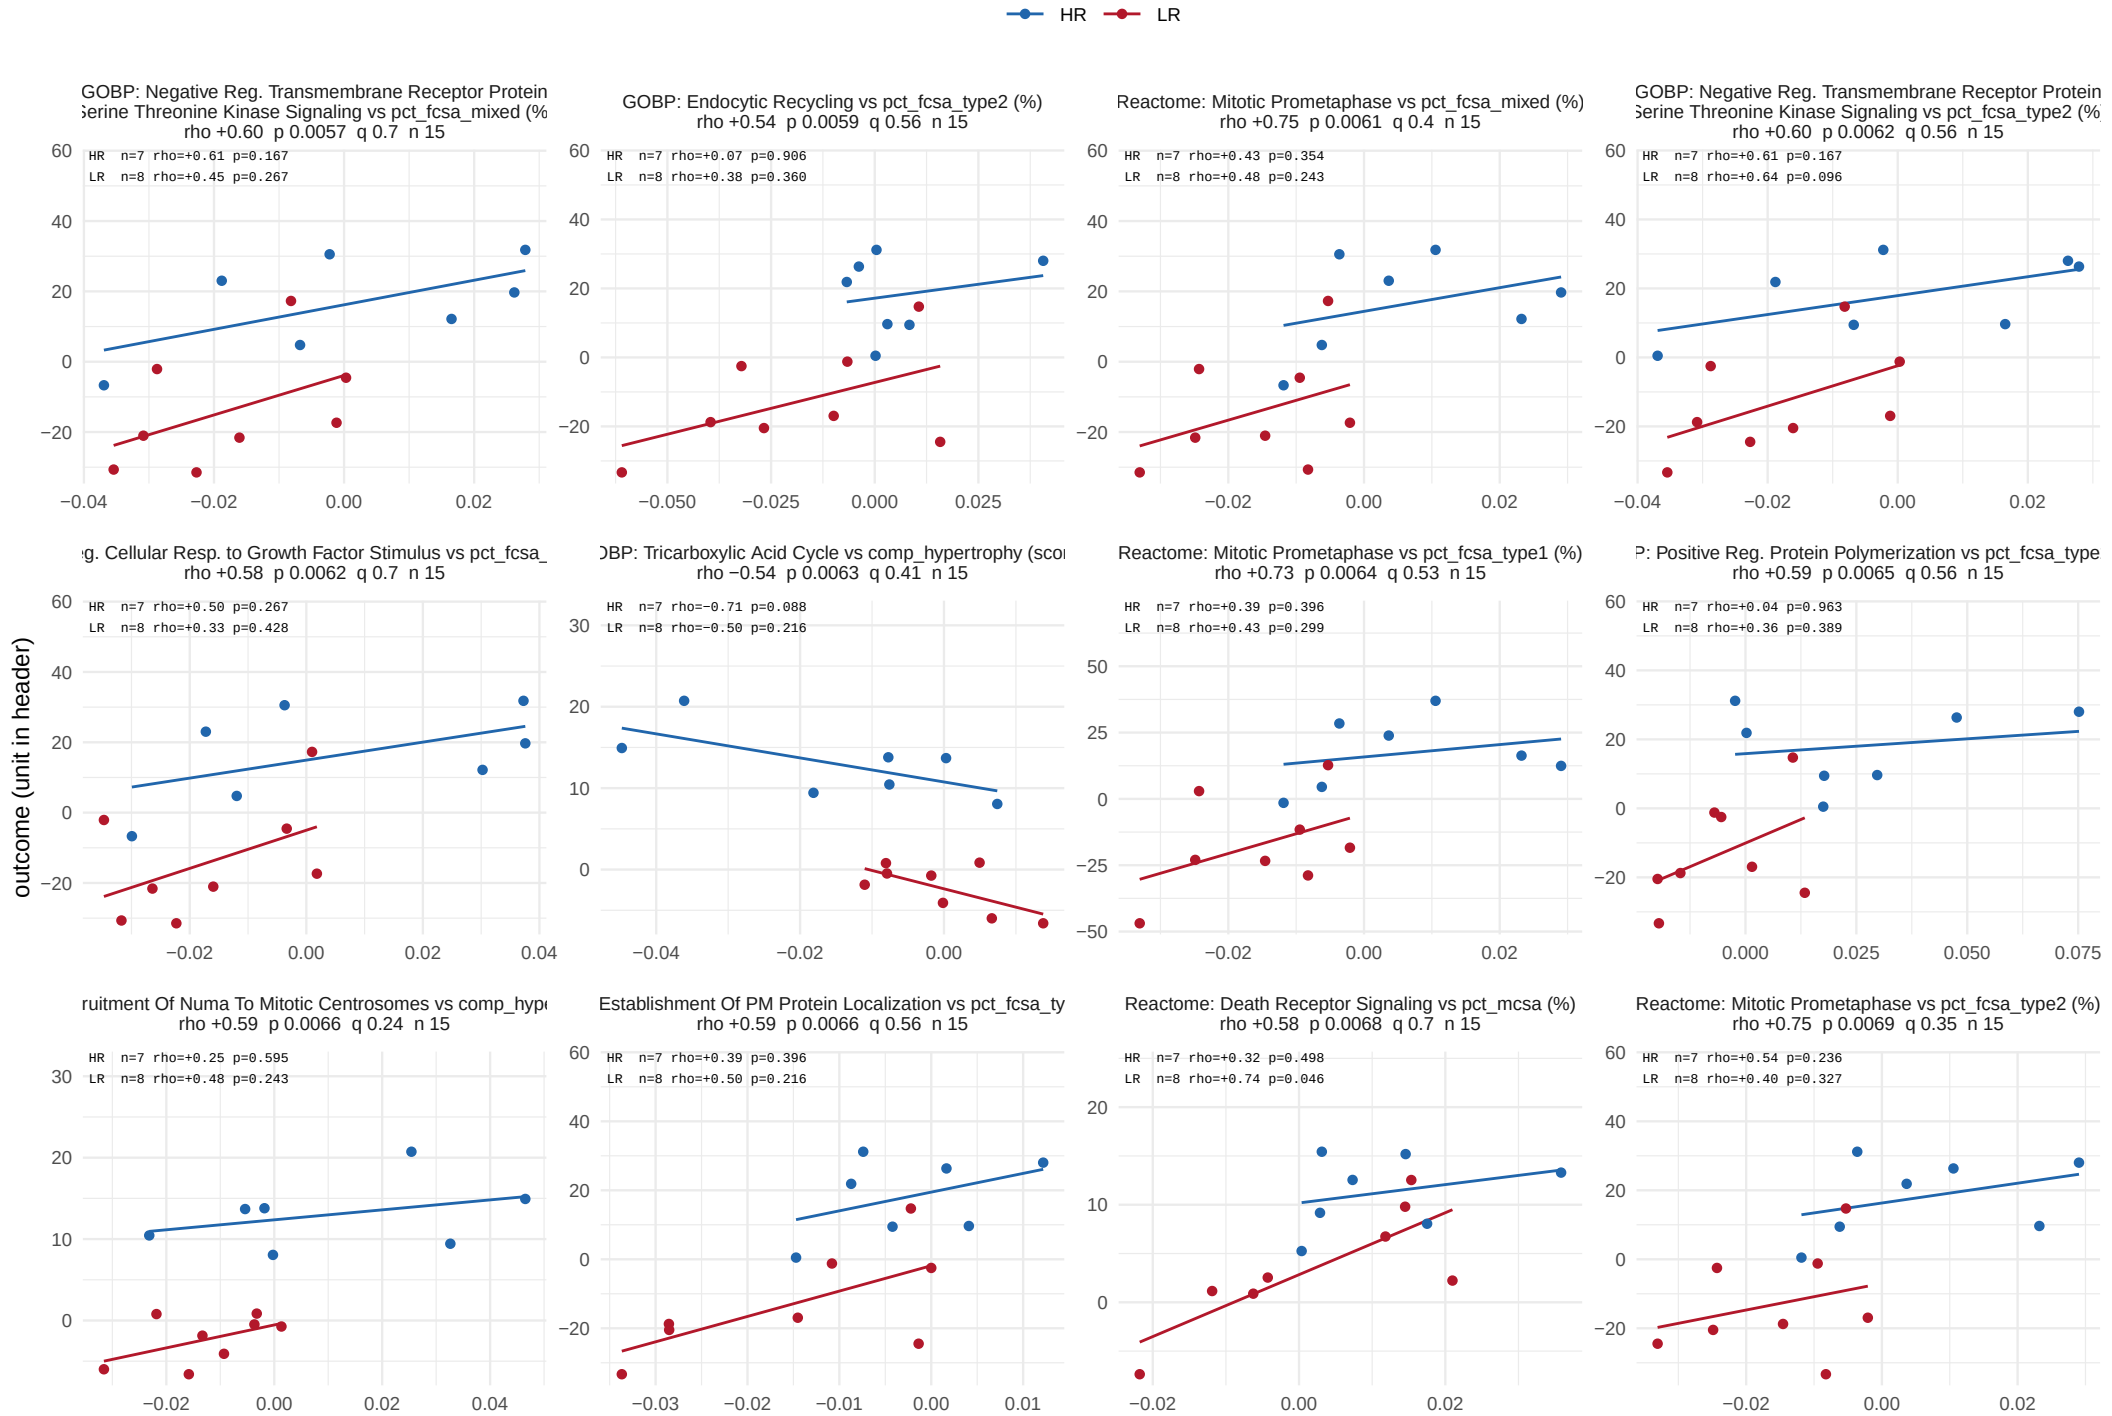

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


494 of 11024 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 6 of 42.

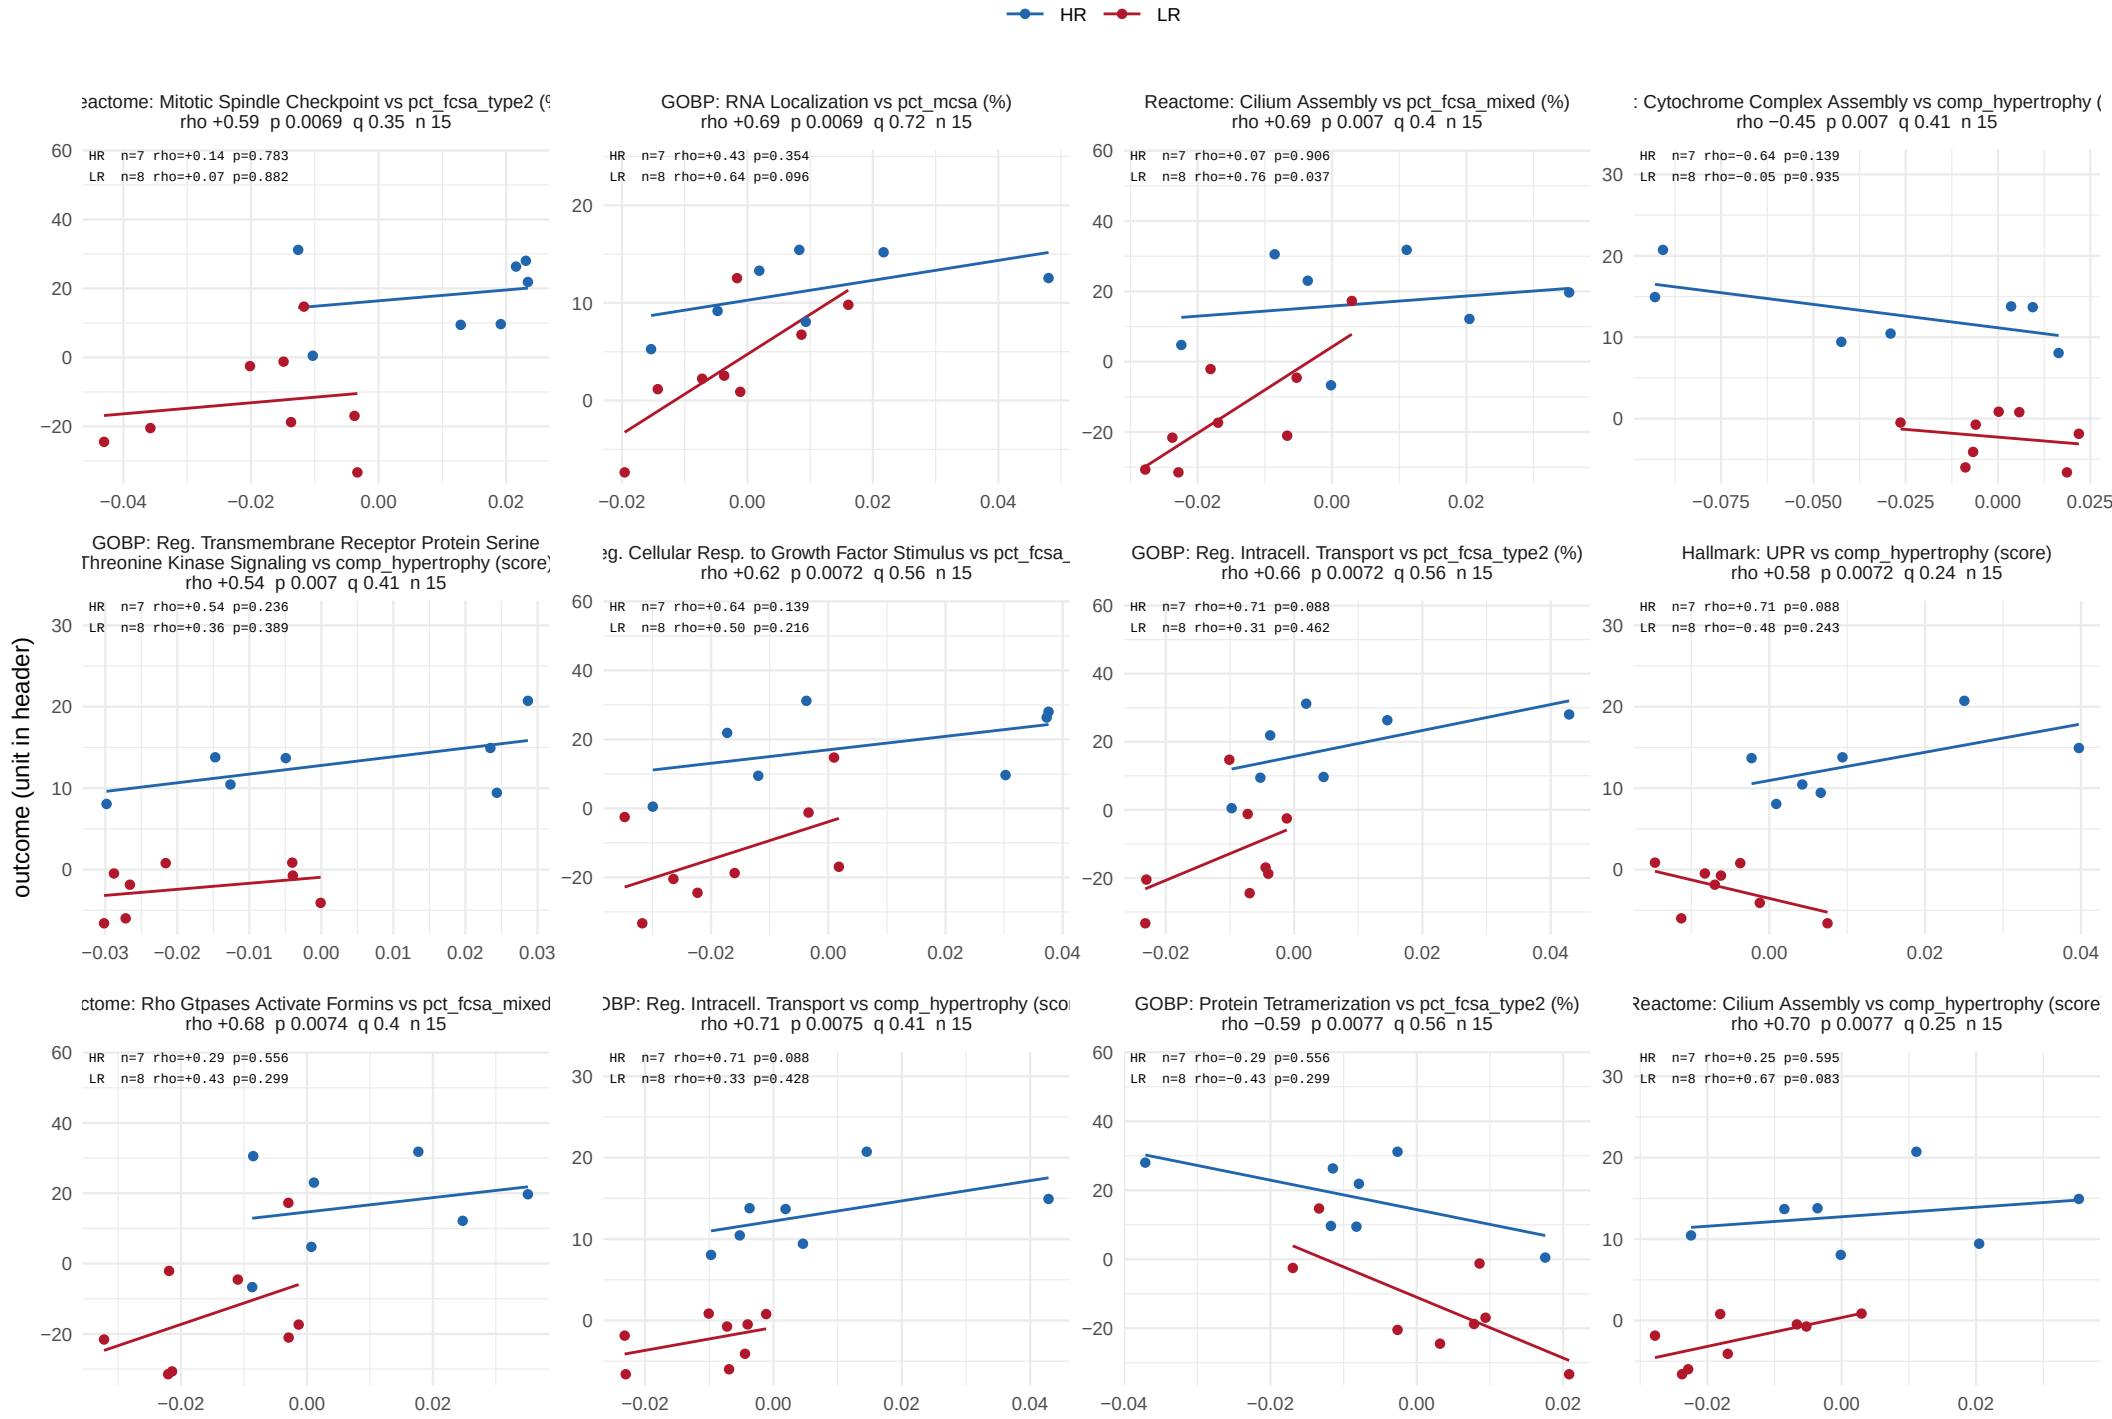

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


494 of 11024 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 7 of 42.

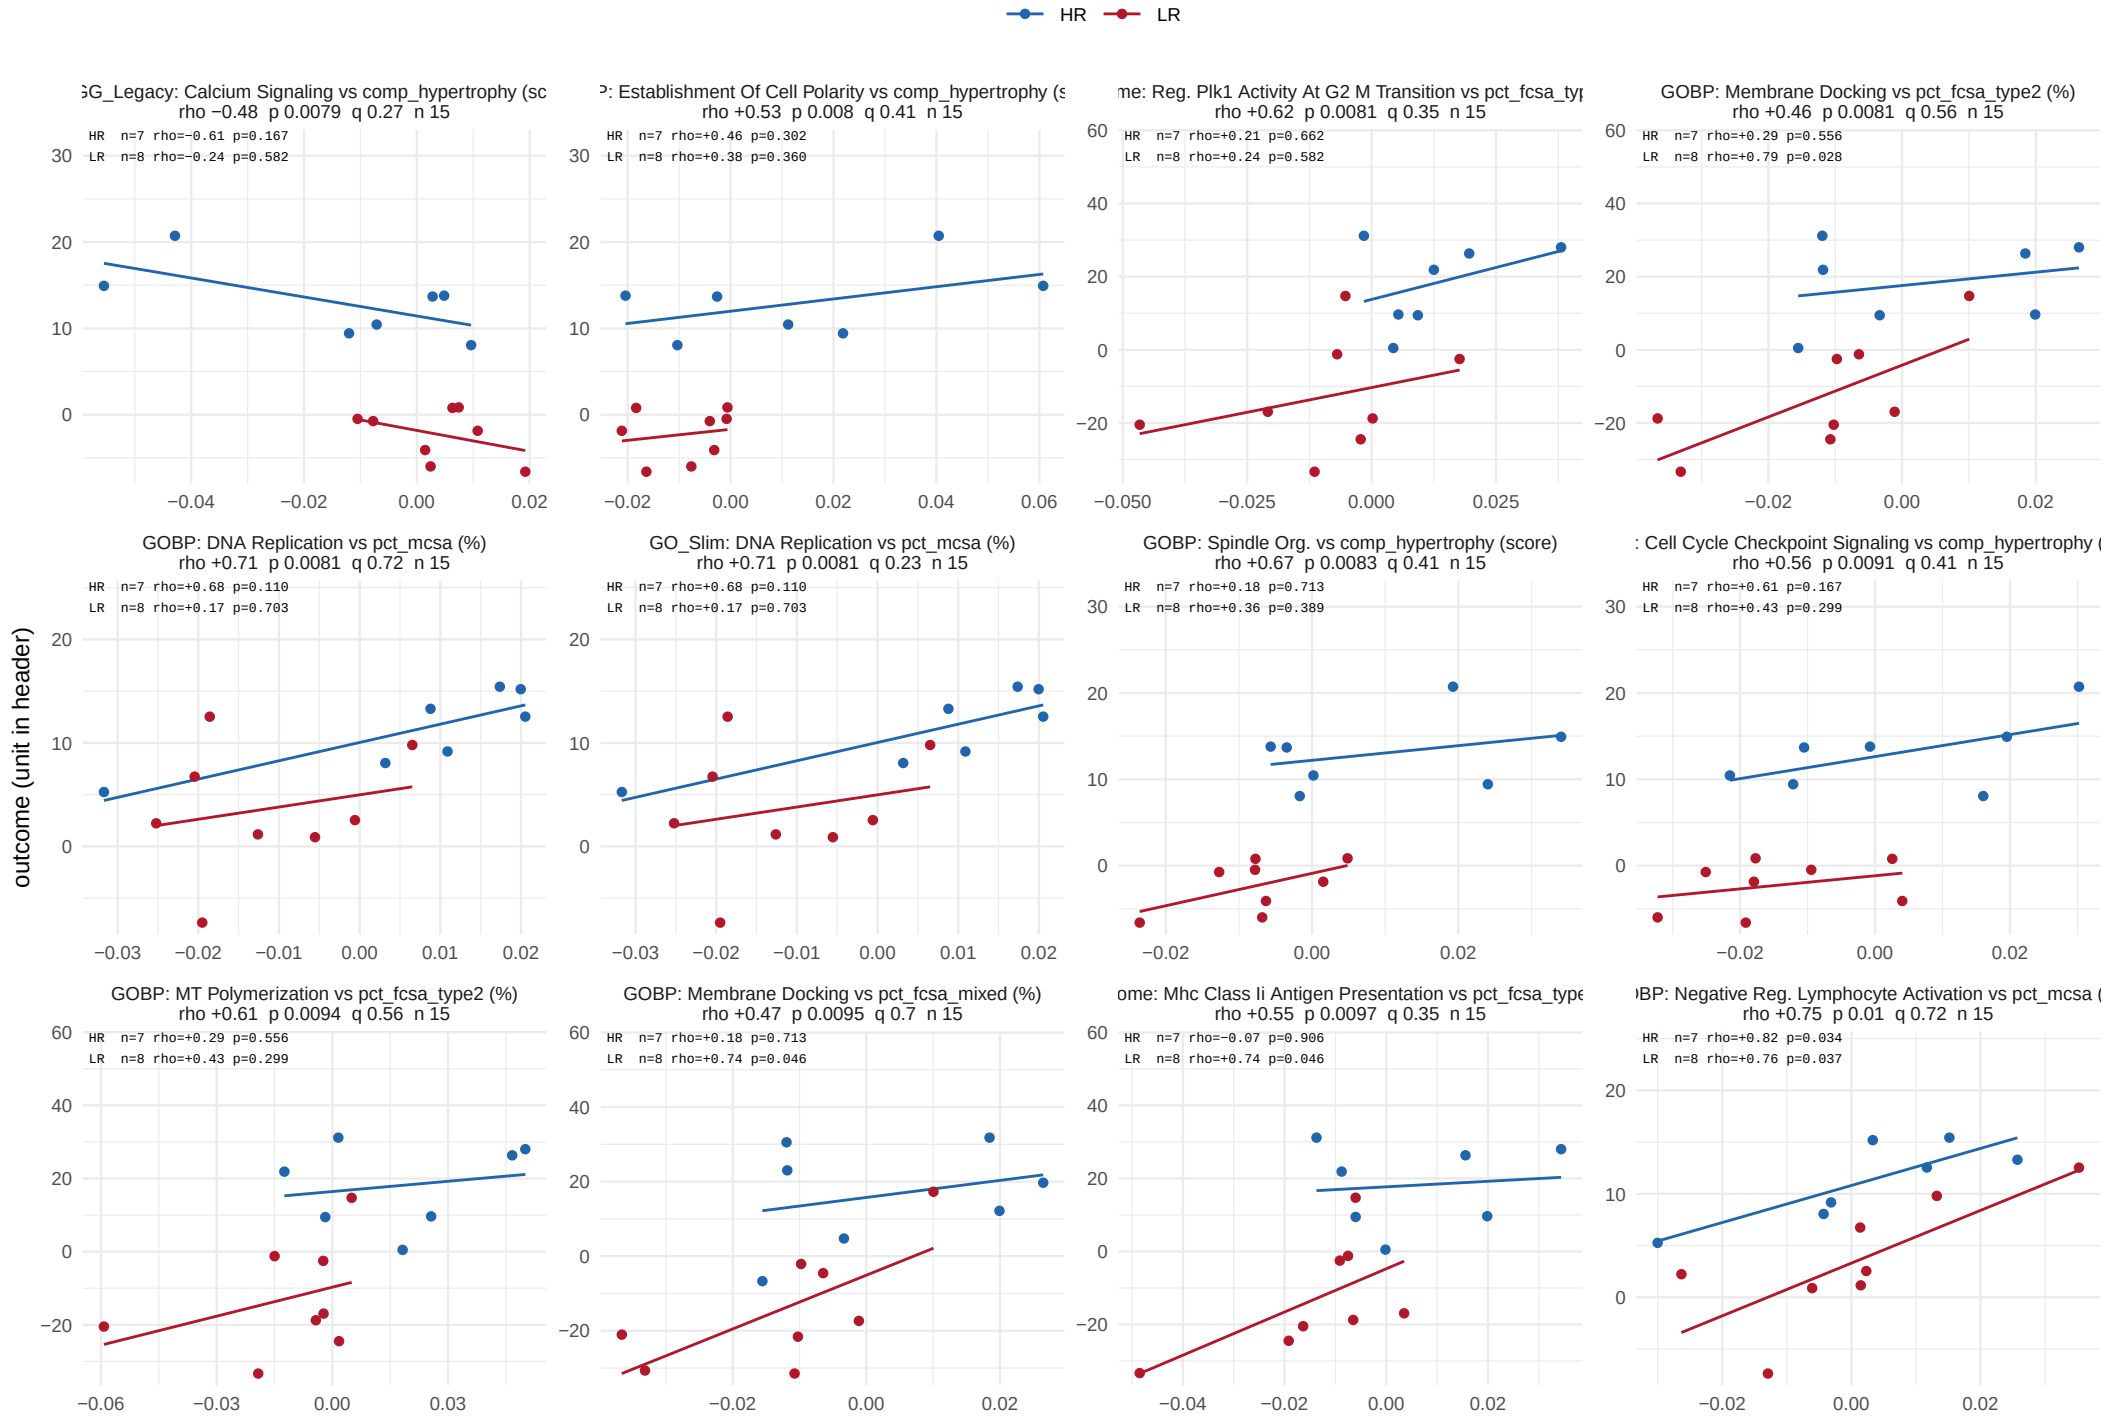

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


494 of 11024 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 8 of 42.

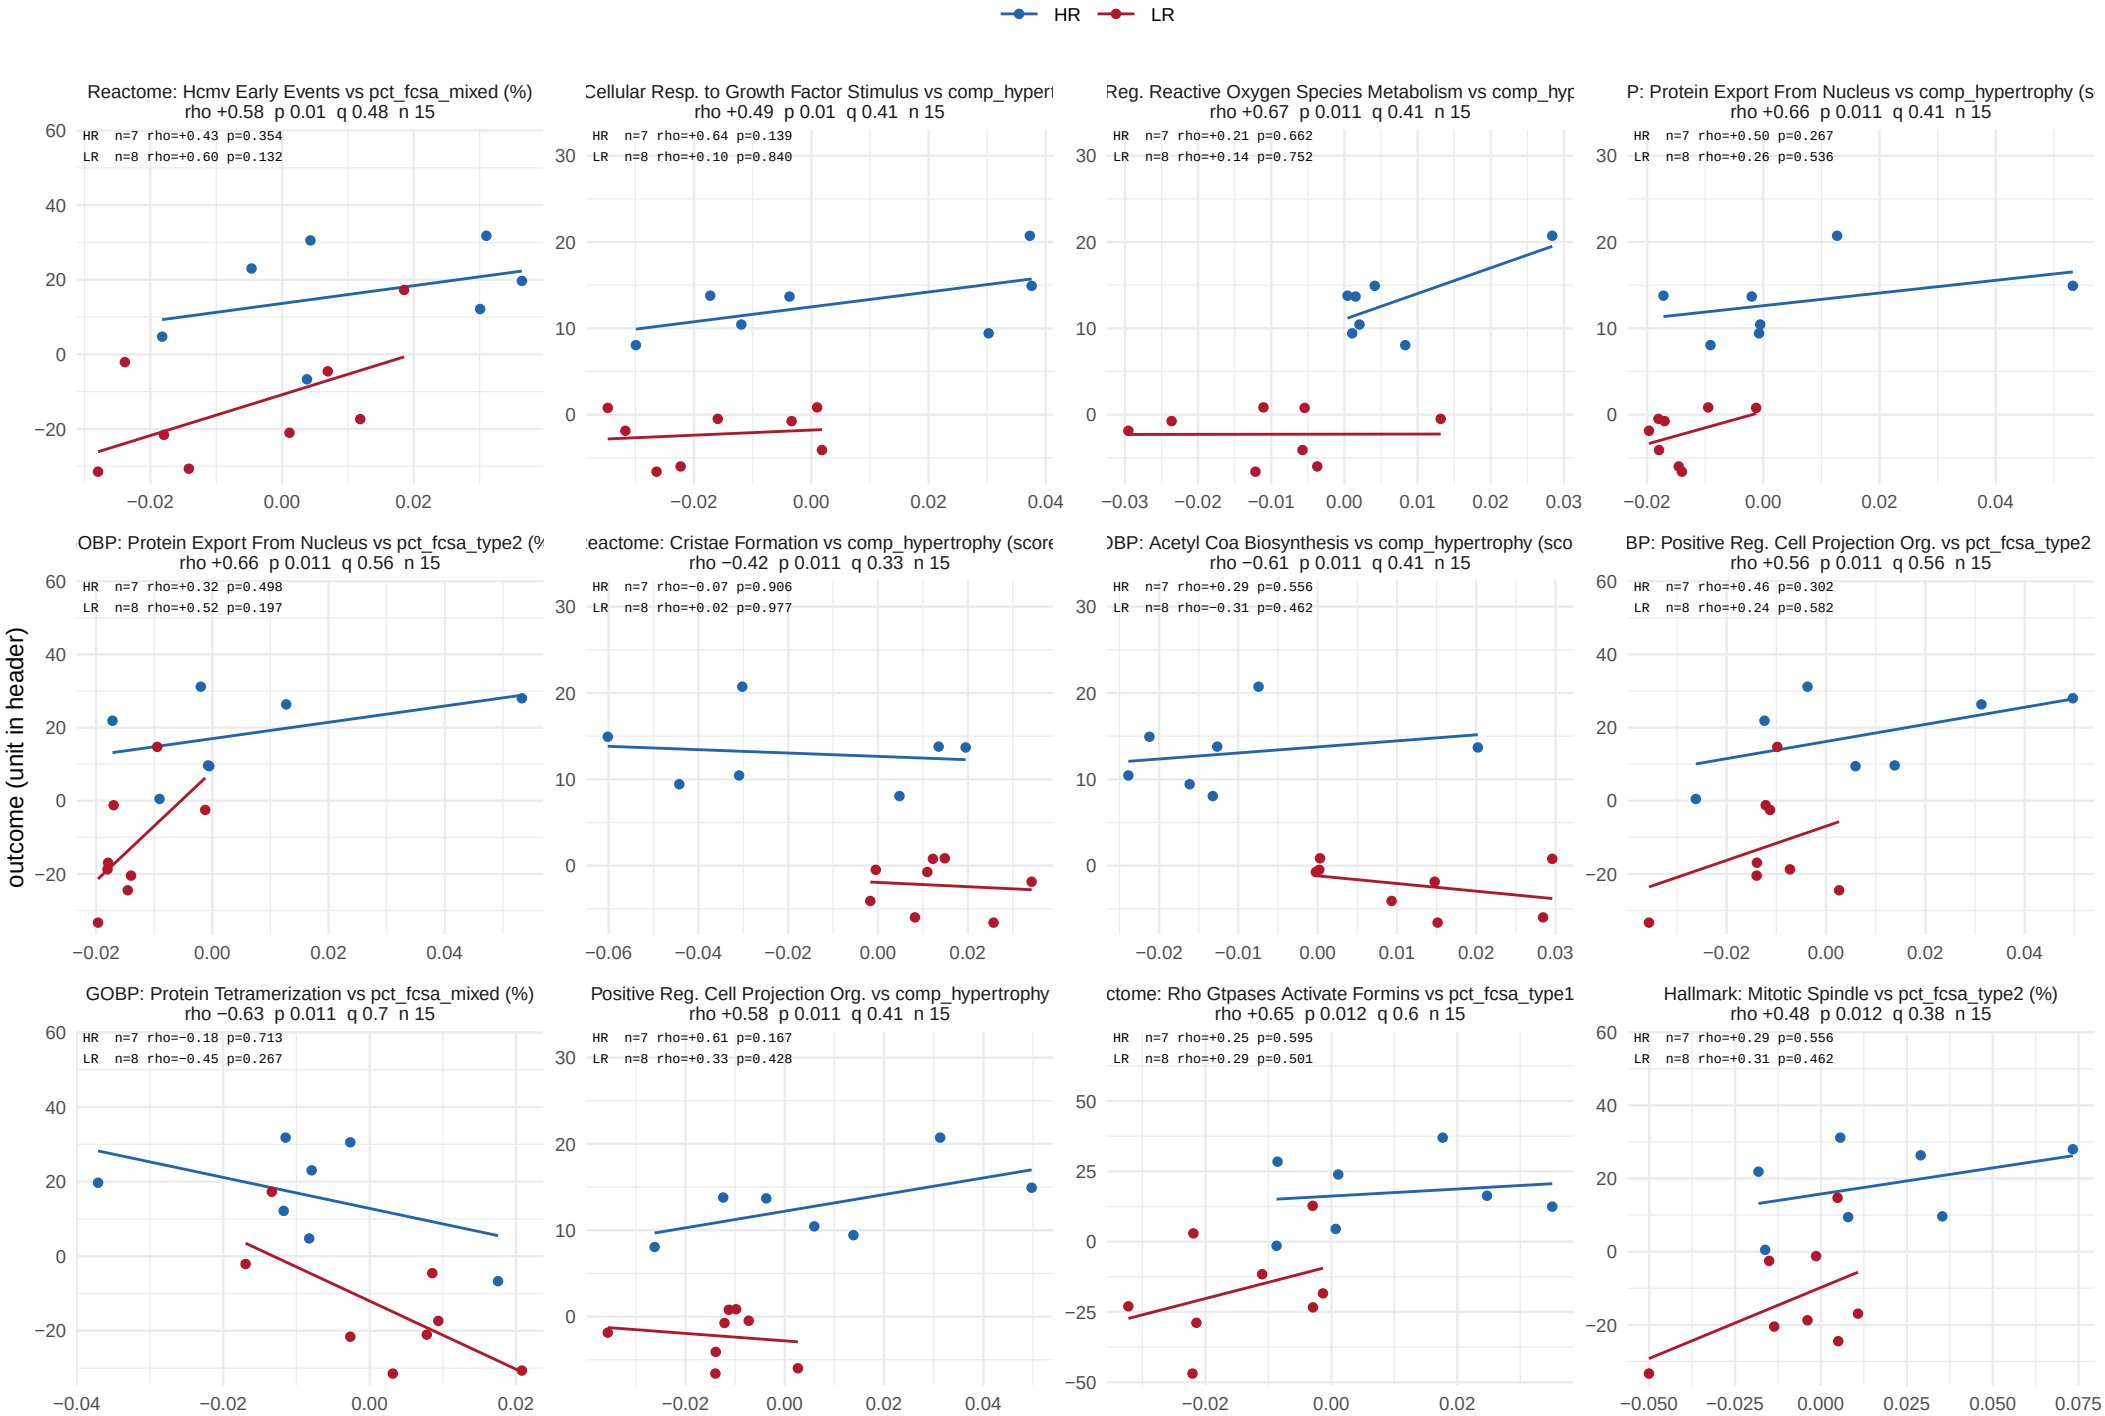

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


494 of 11024 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 9 of 42.

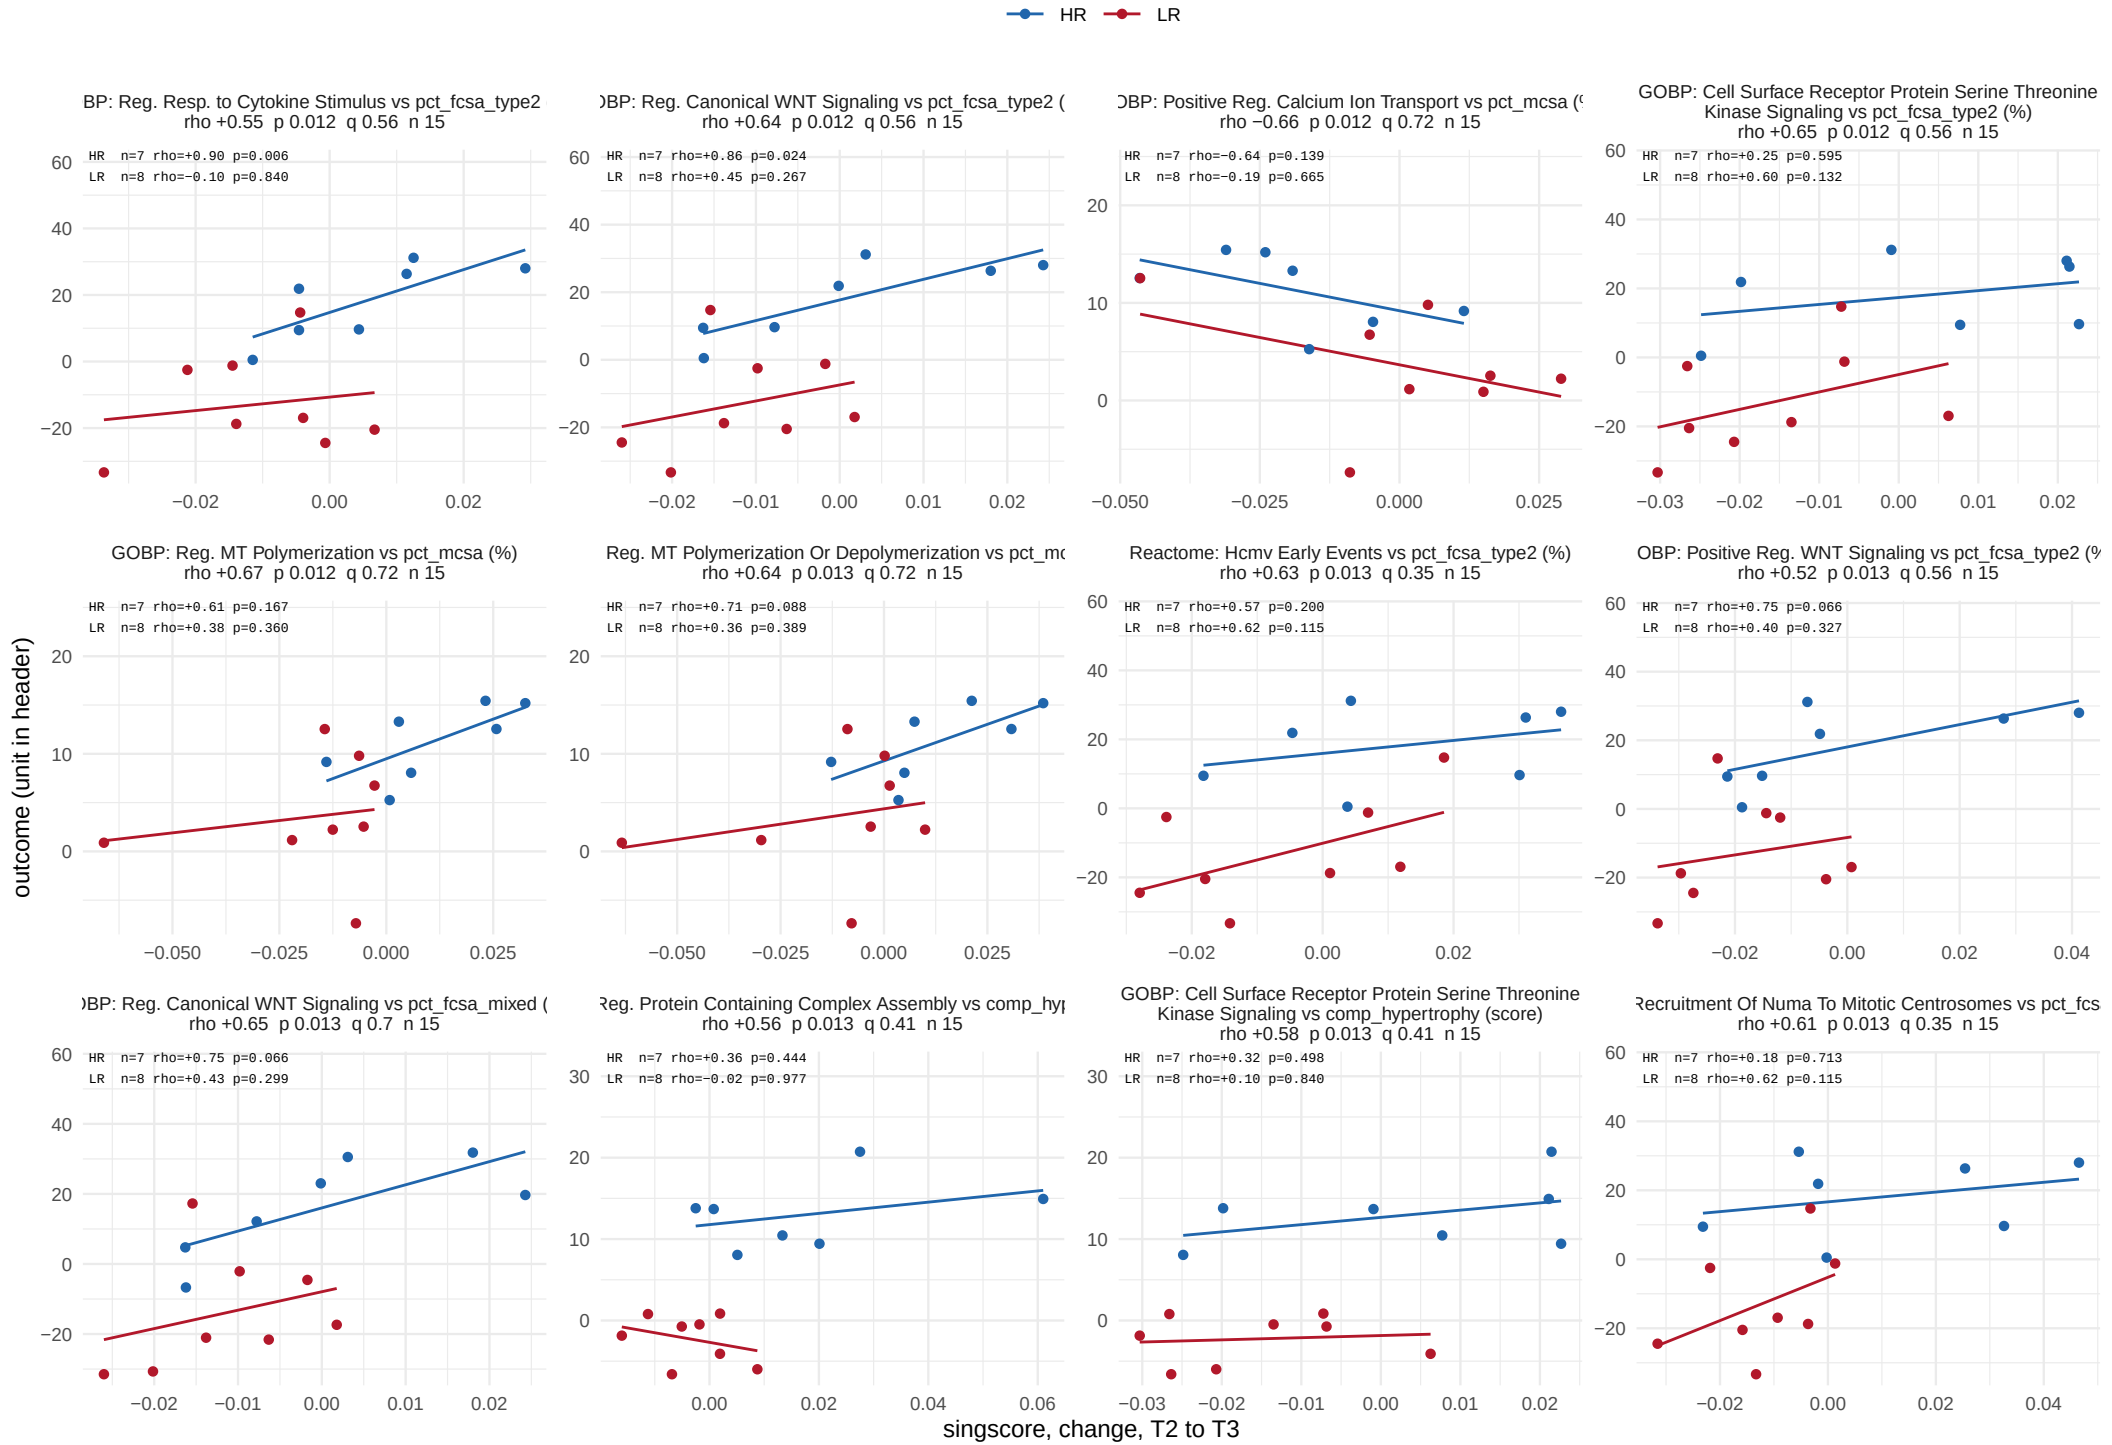

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


494 of 11024 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 10 of 42.

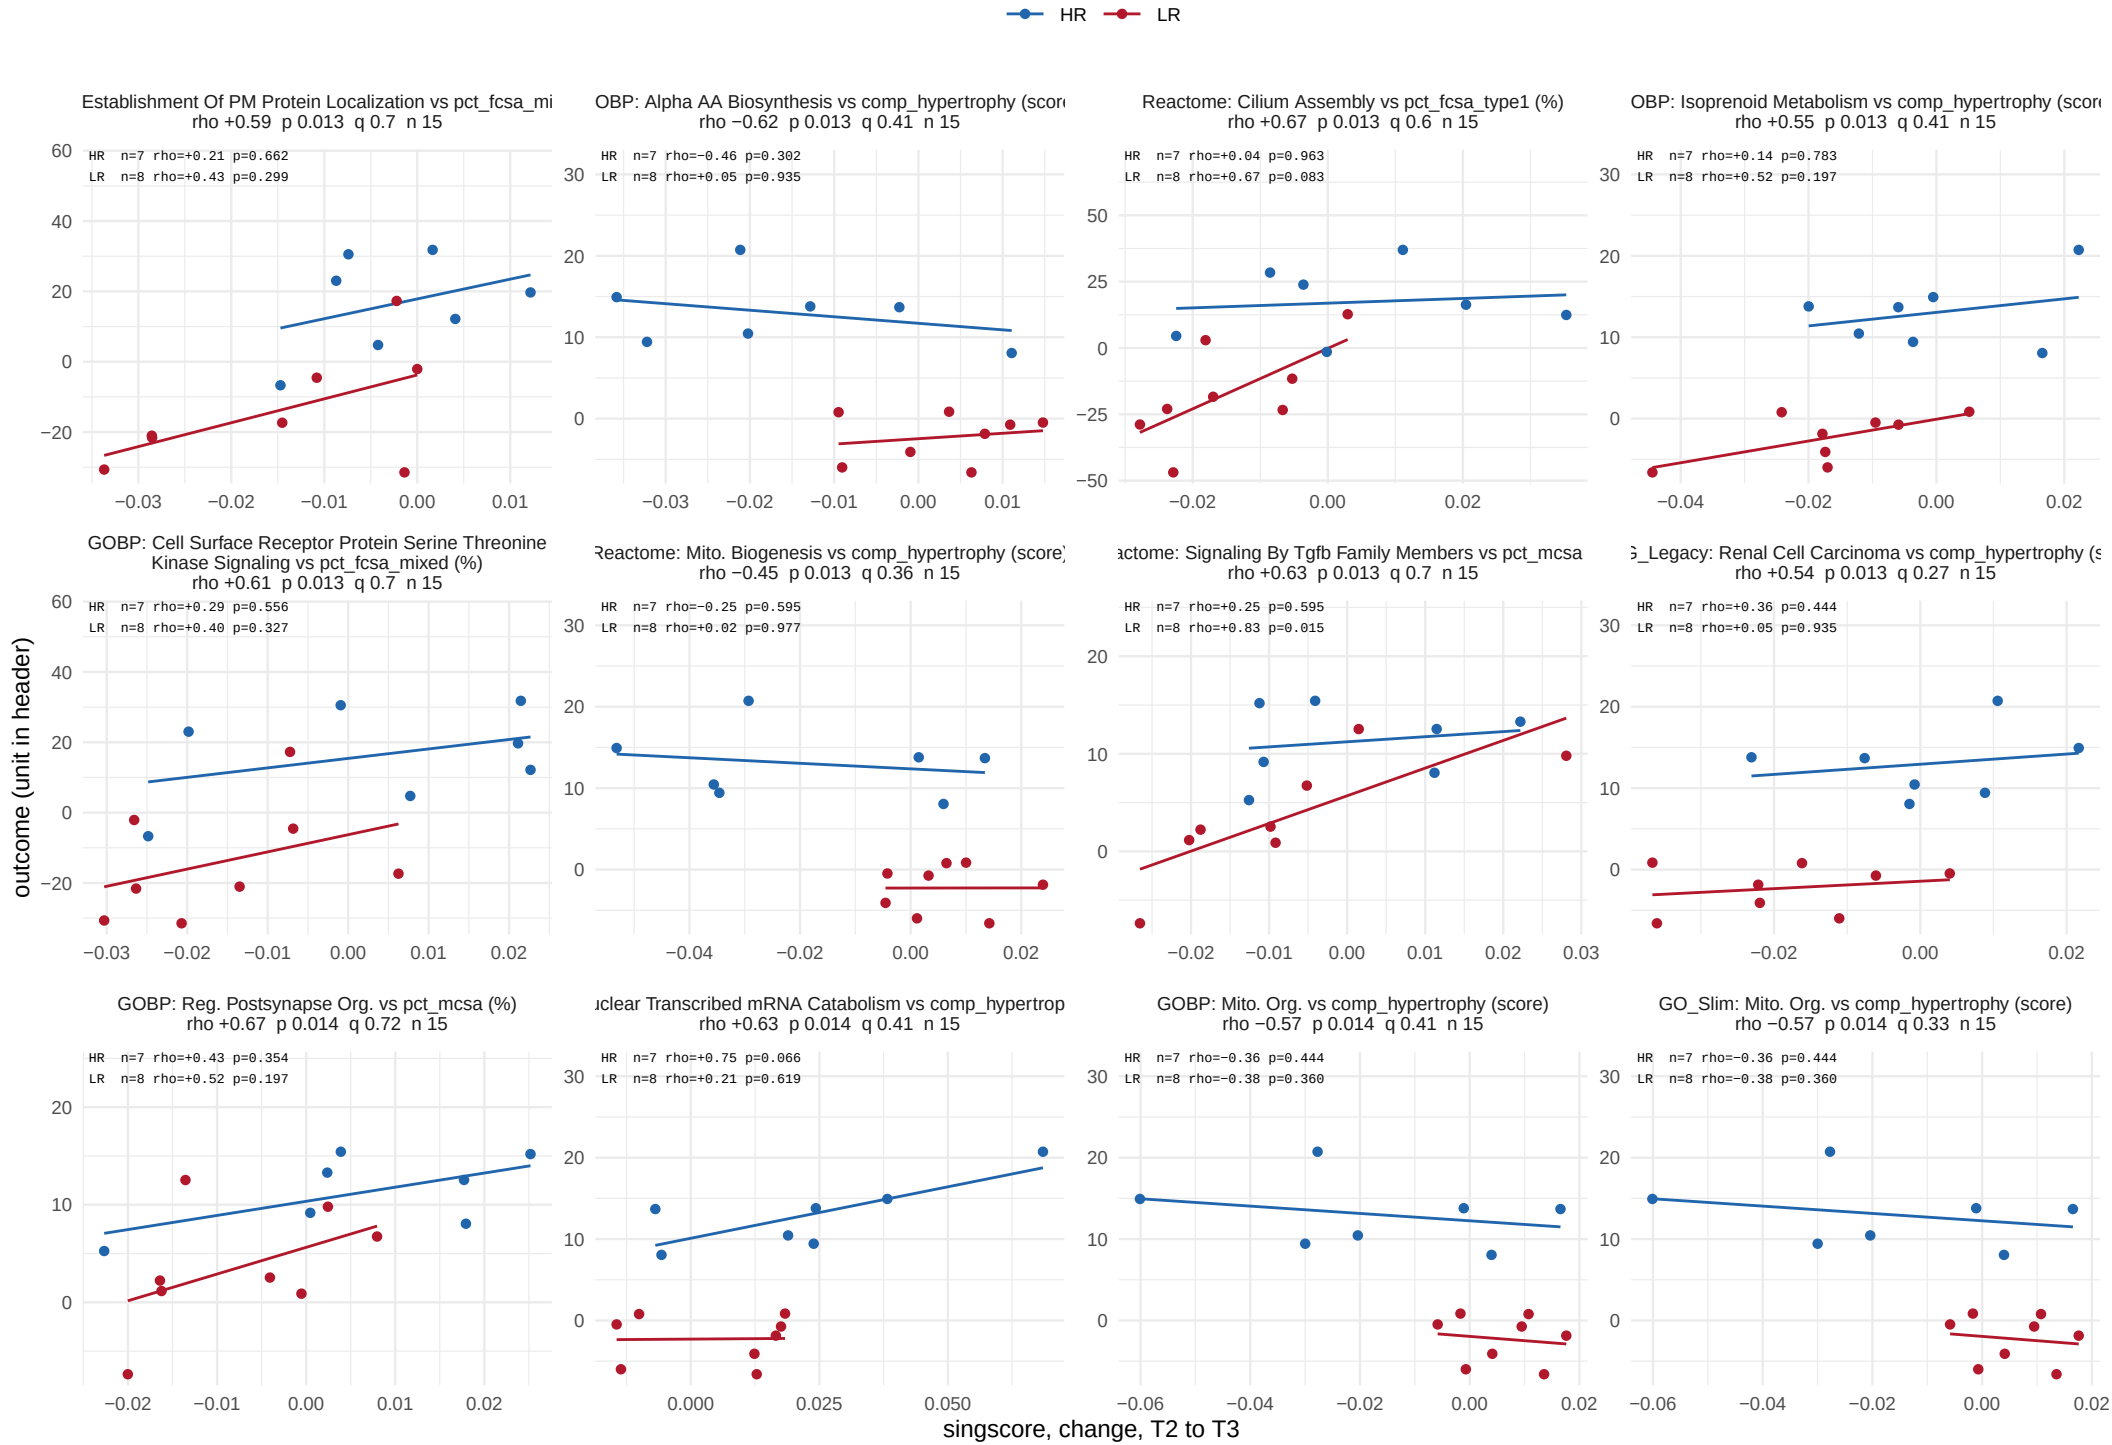

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


494 of 11024 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 11 of 42.

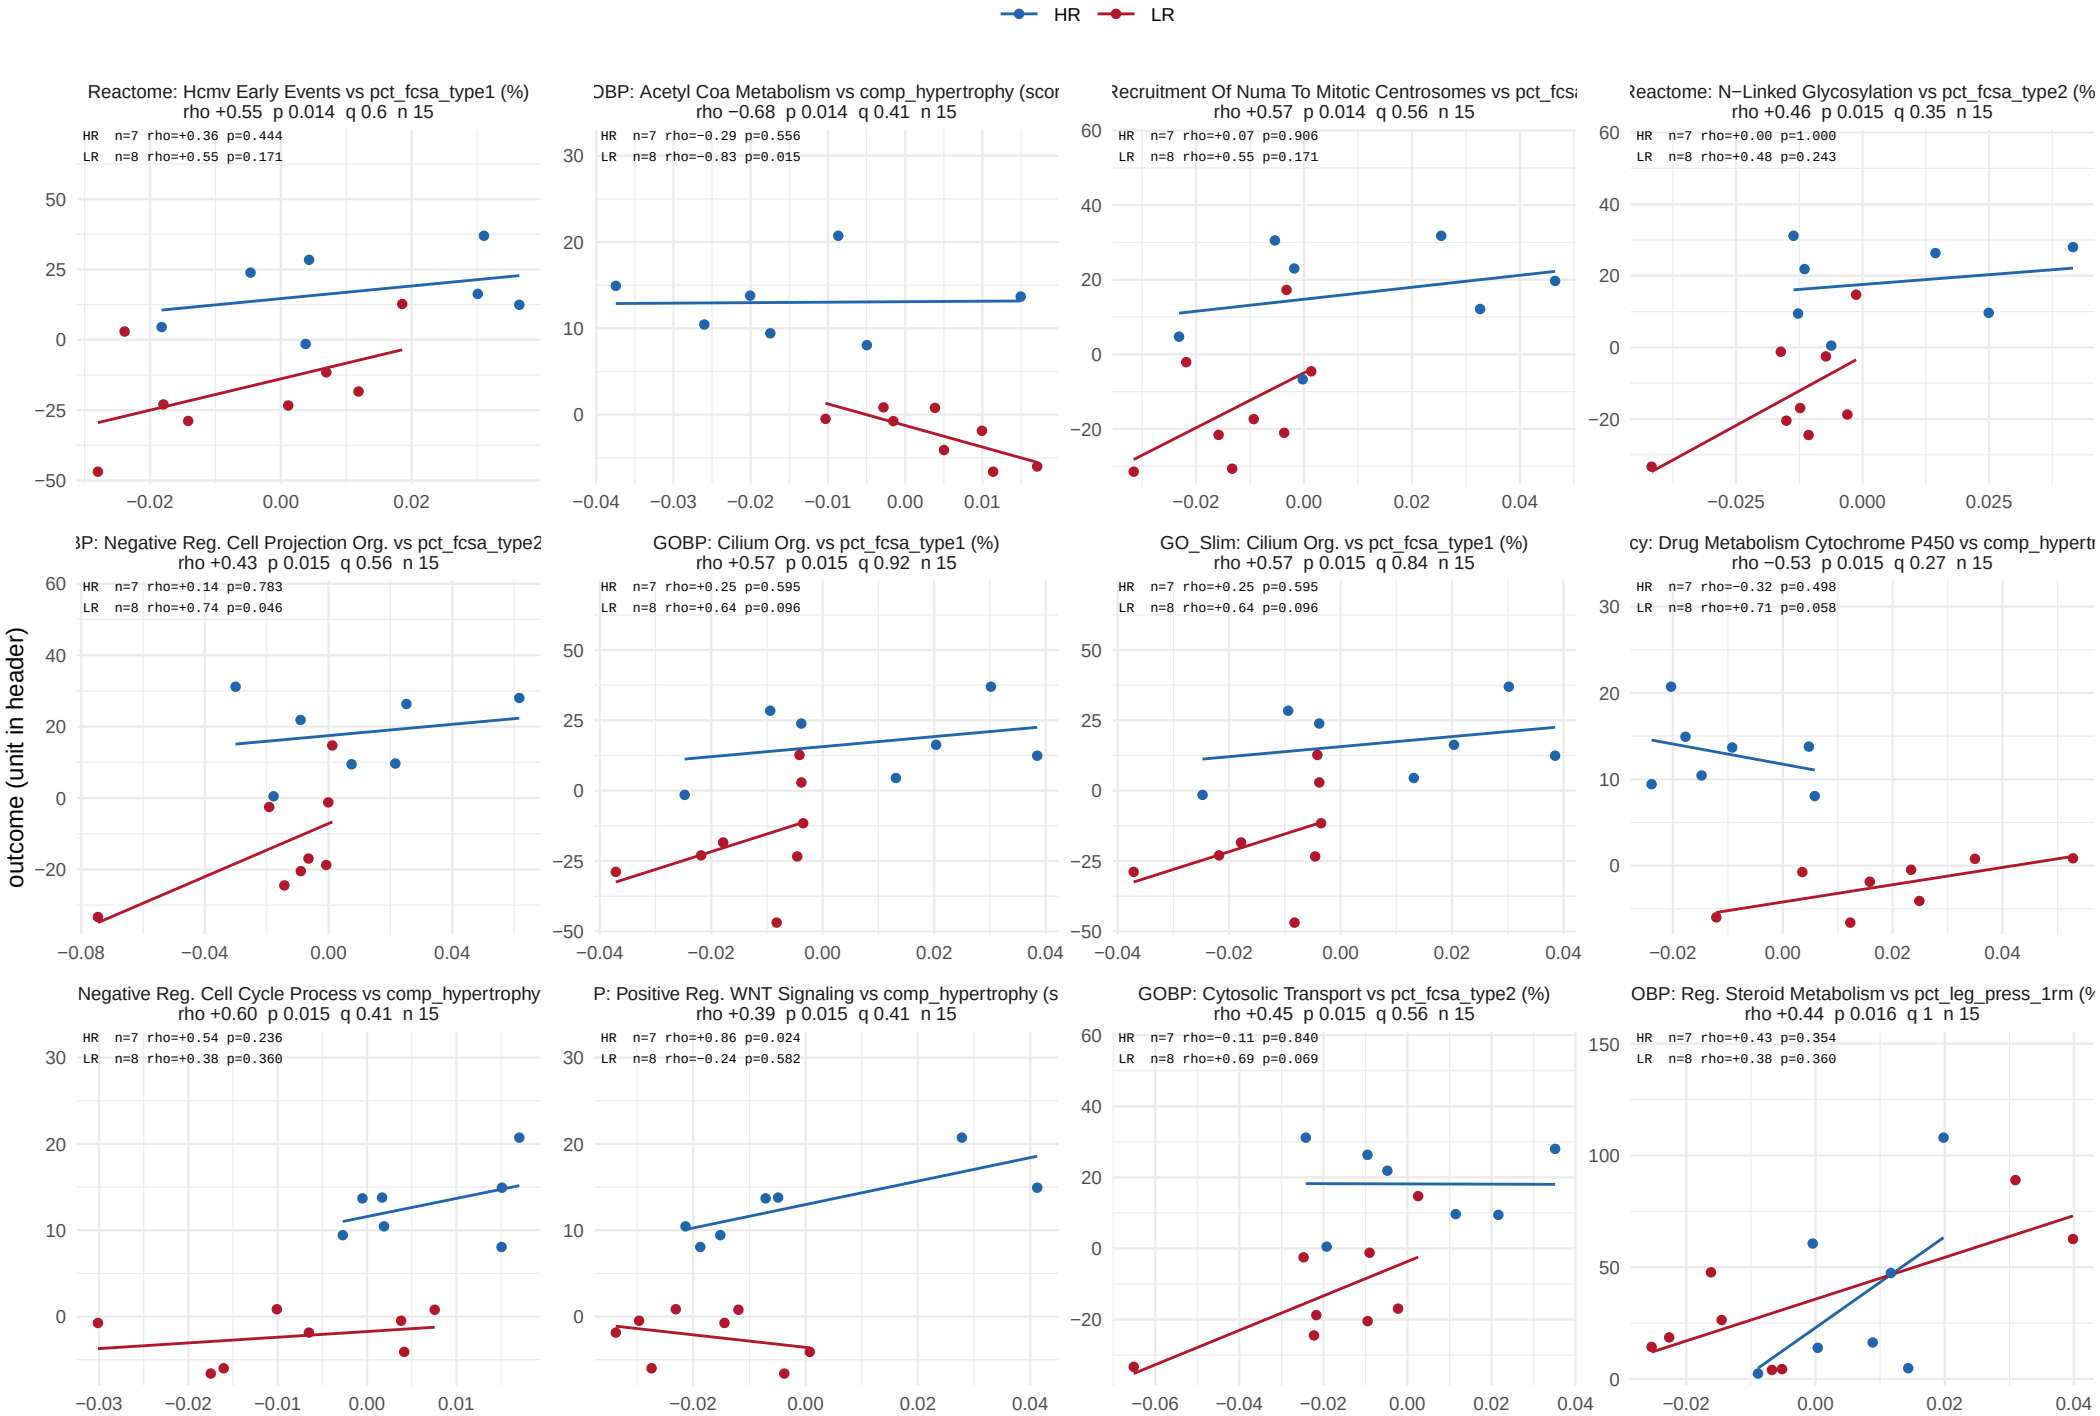

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


494 of 11024 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 12 of 42.

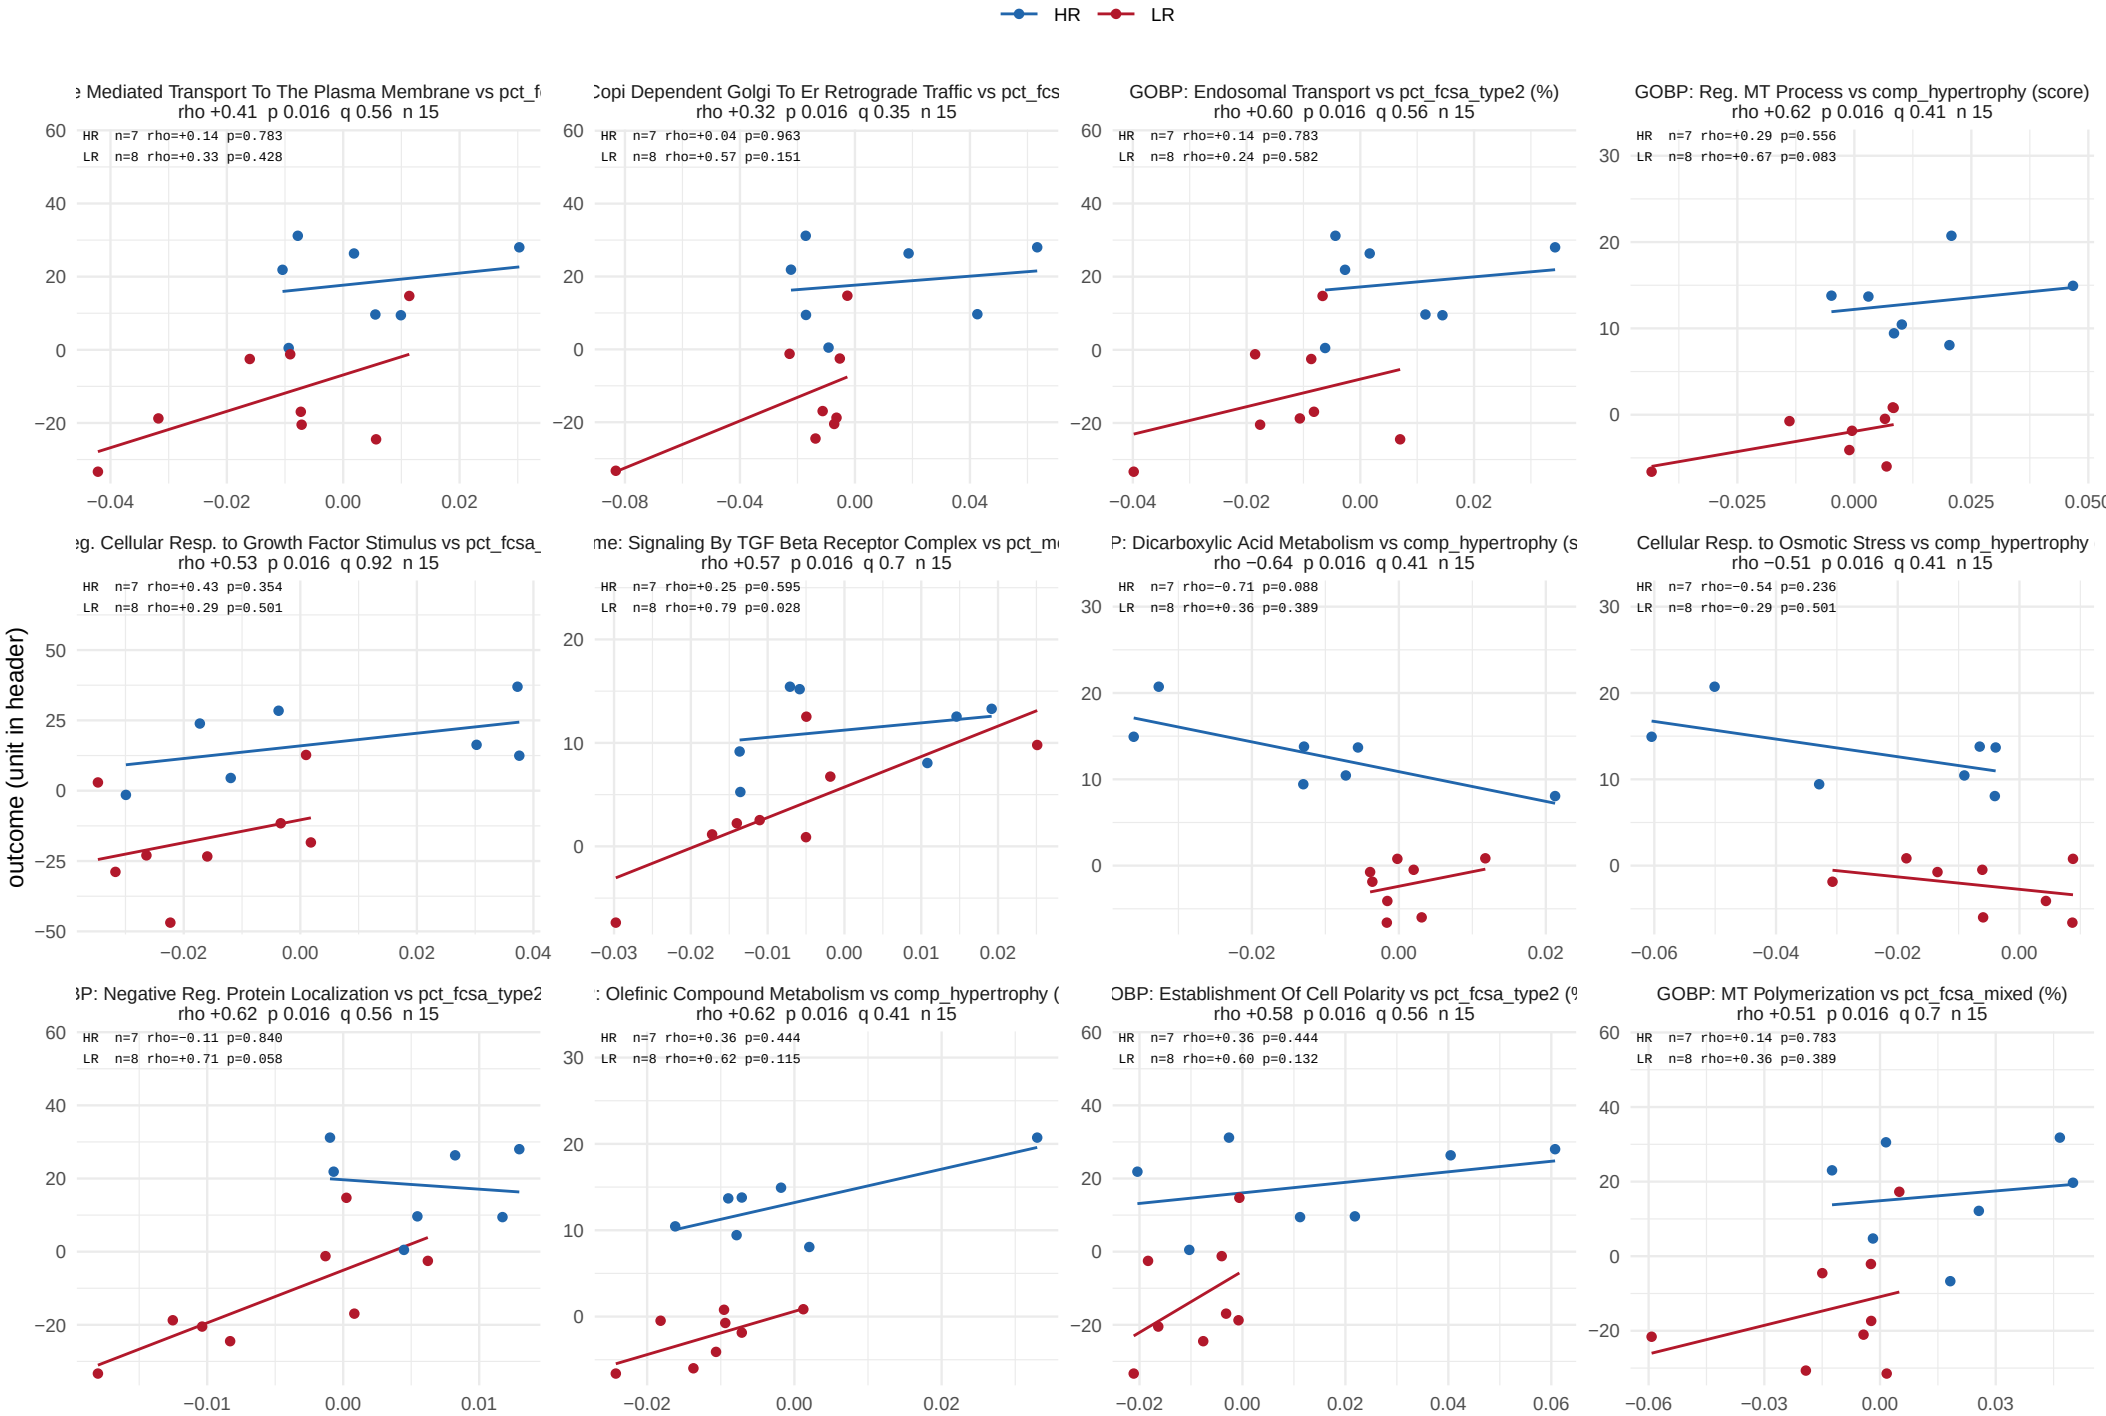

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


494 of 11024 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 13 of 42.

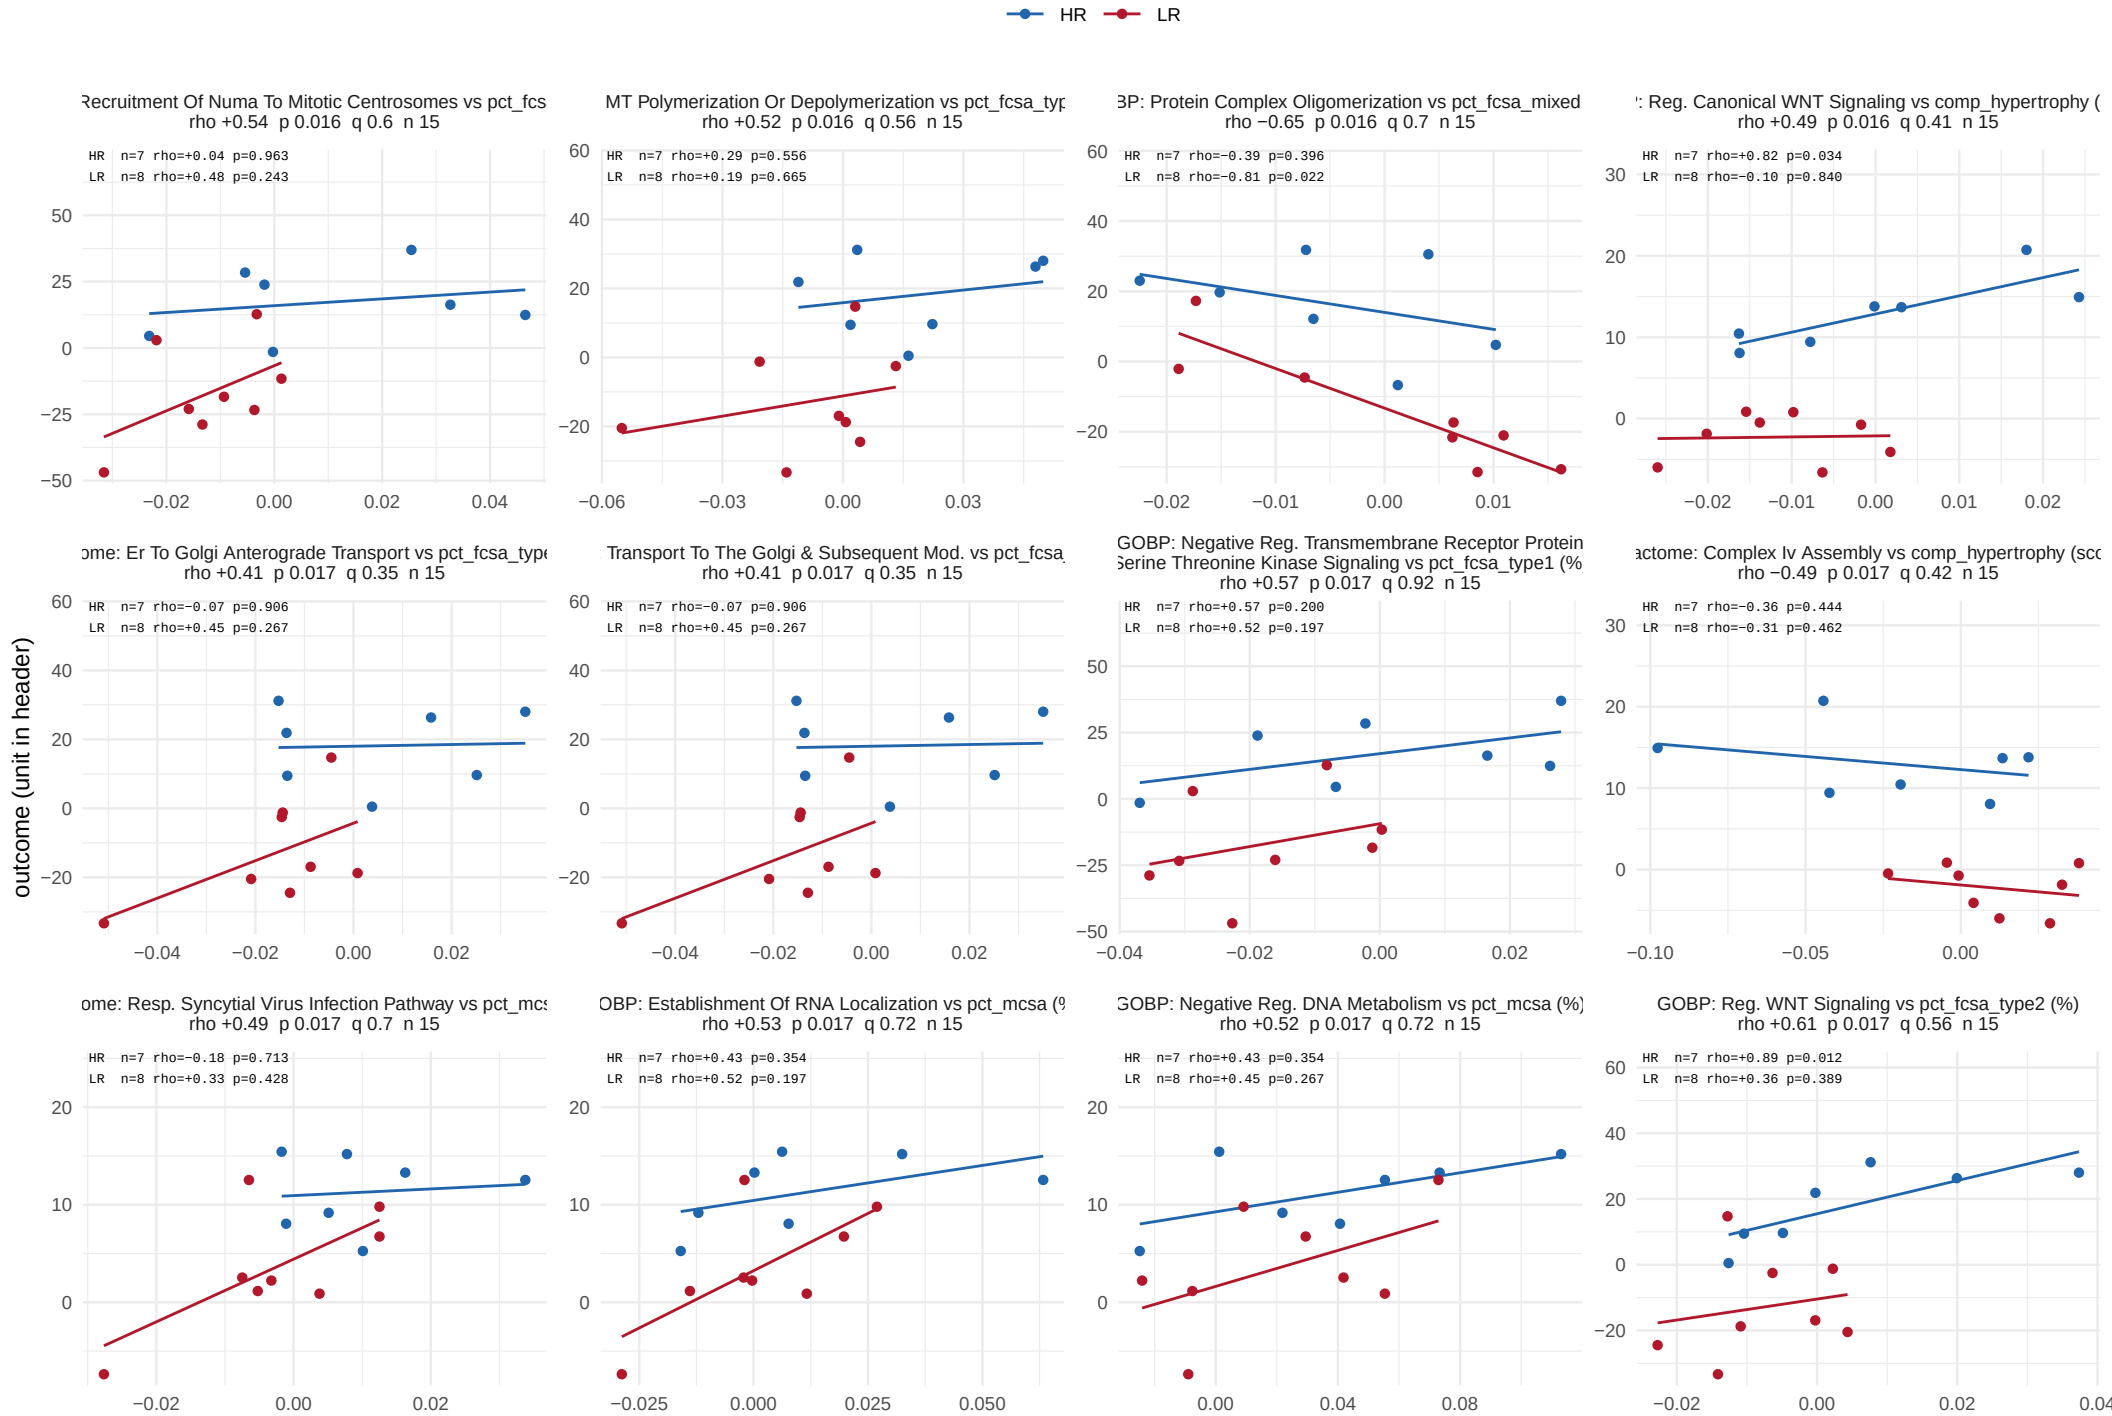

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


494 of 11024 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 14 of 42.

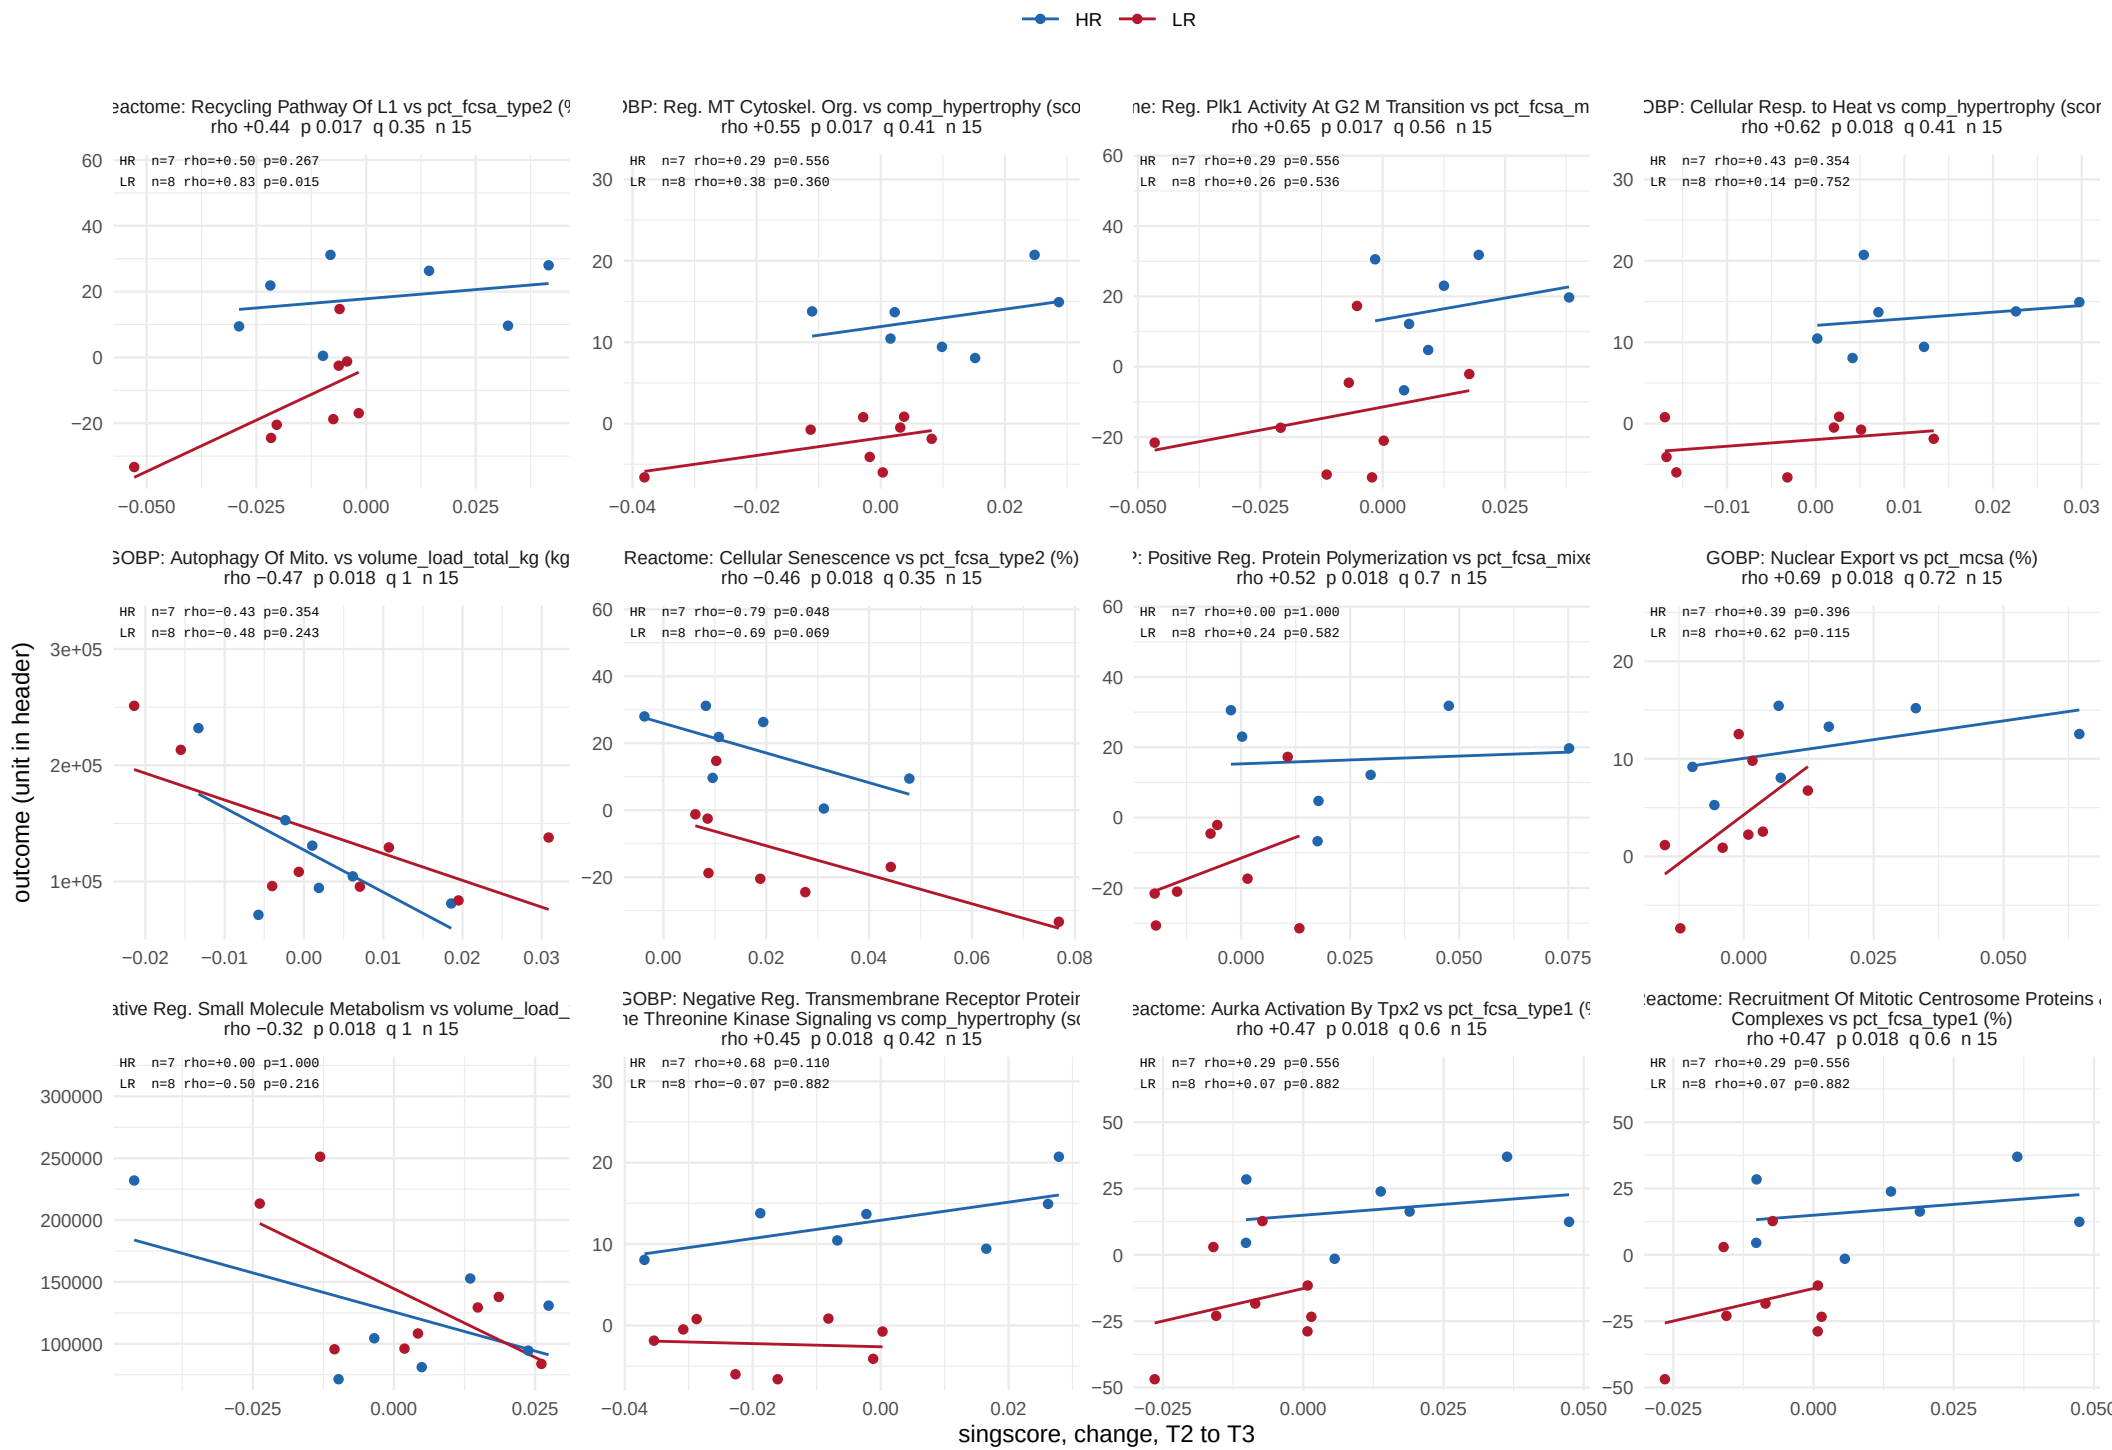

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


494 of 11024 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 15 of 42.

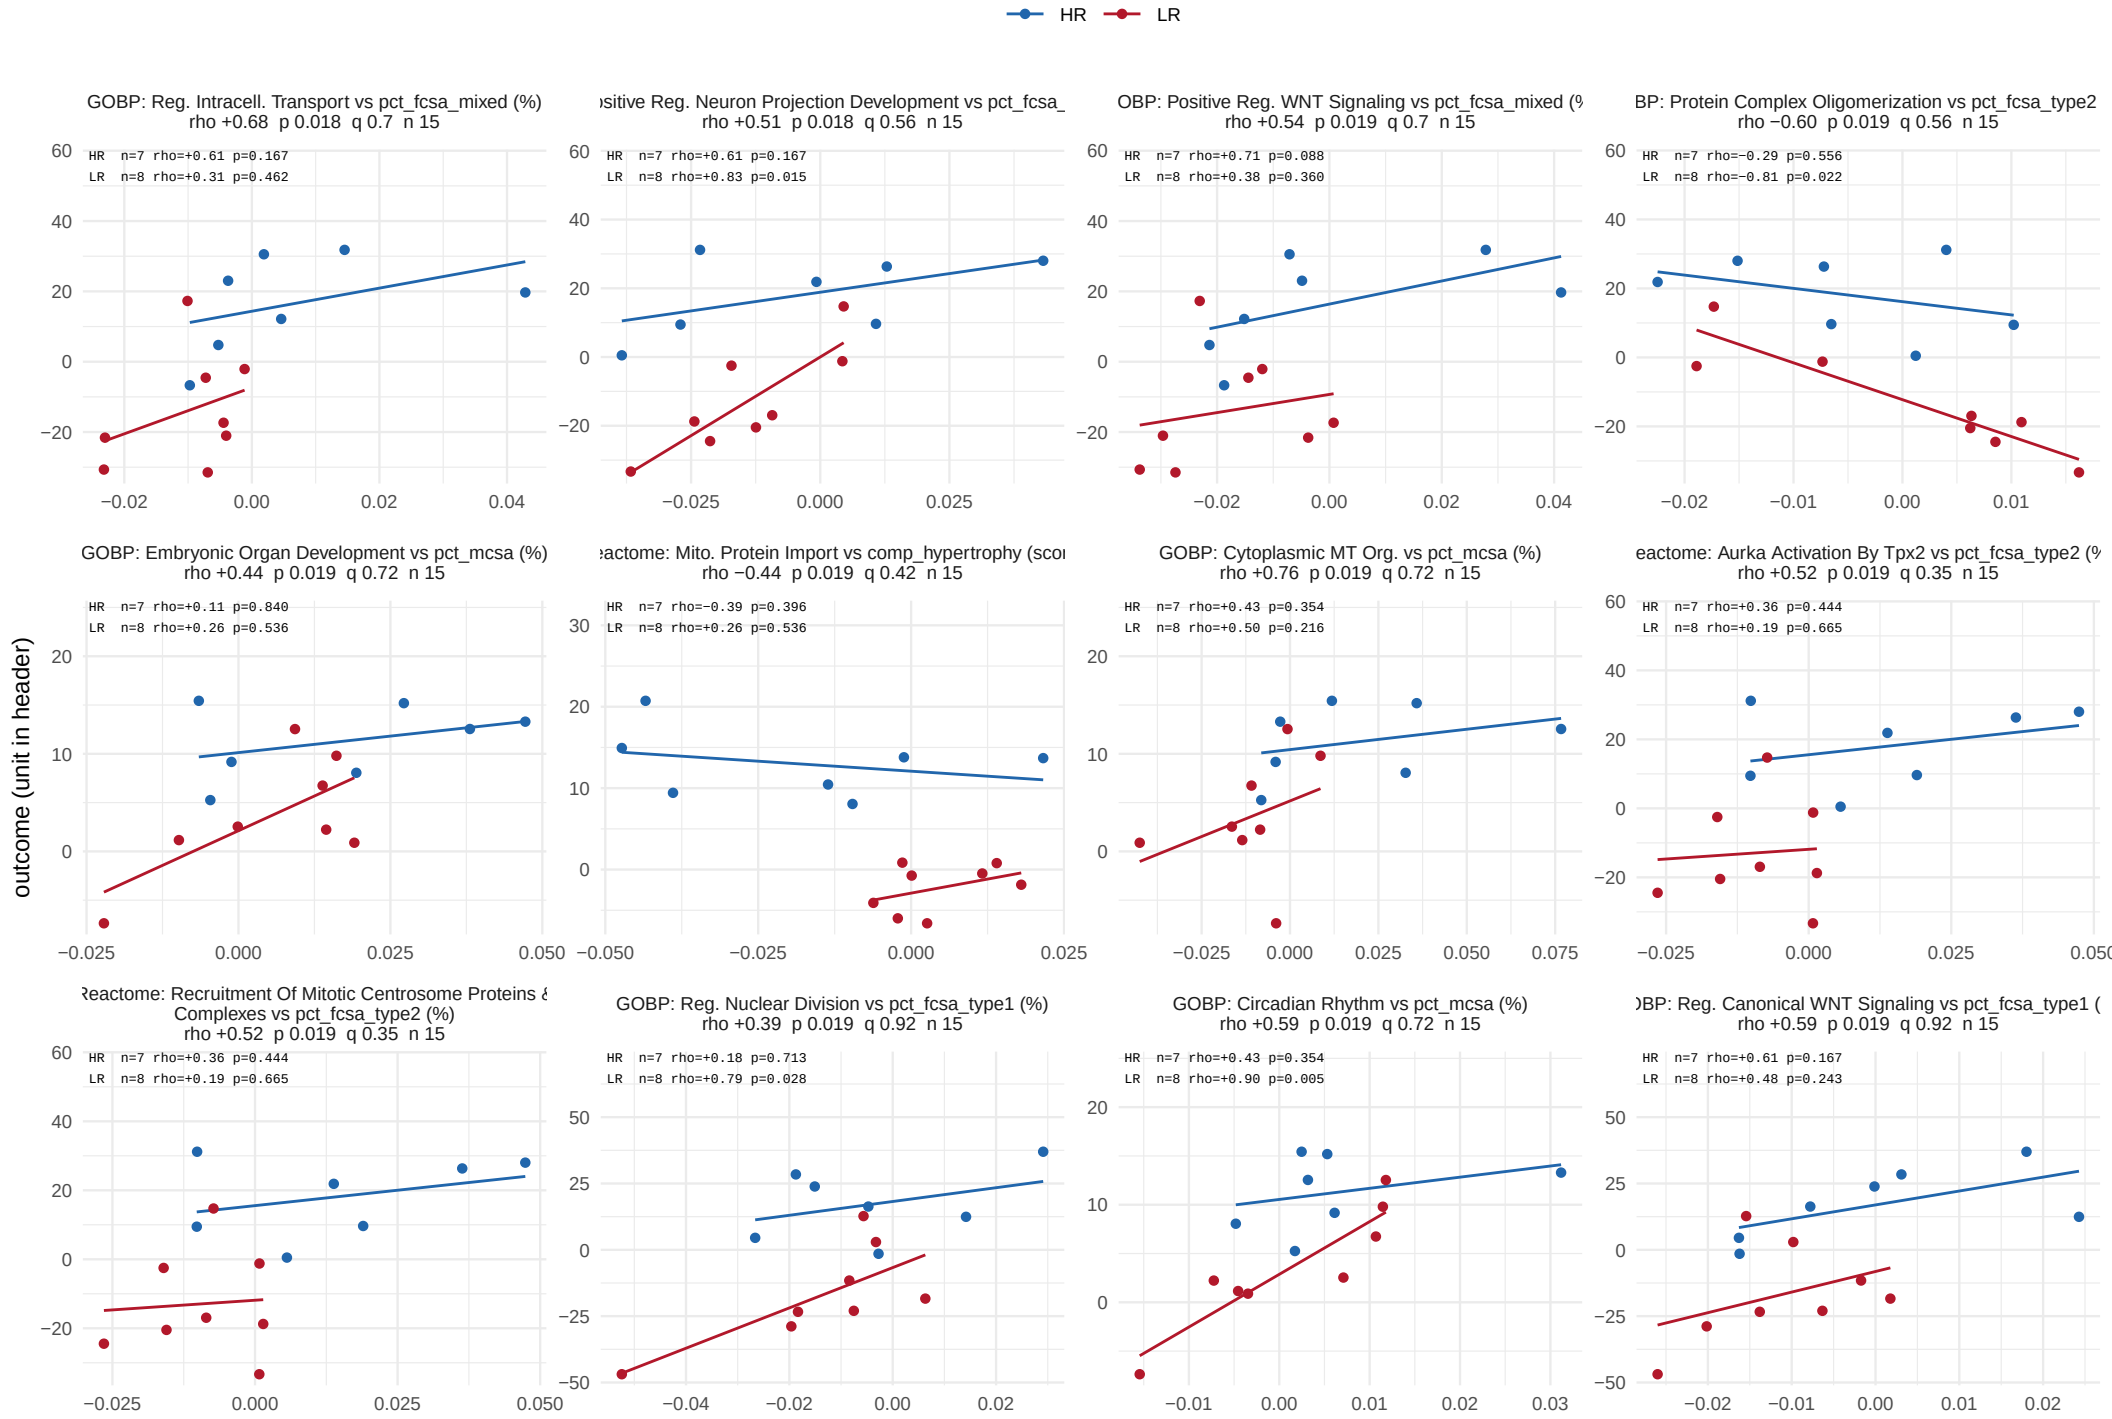

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


494 of 11024 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 16 of 42.

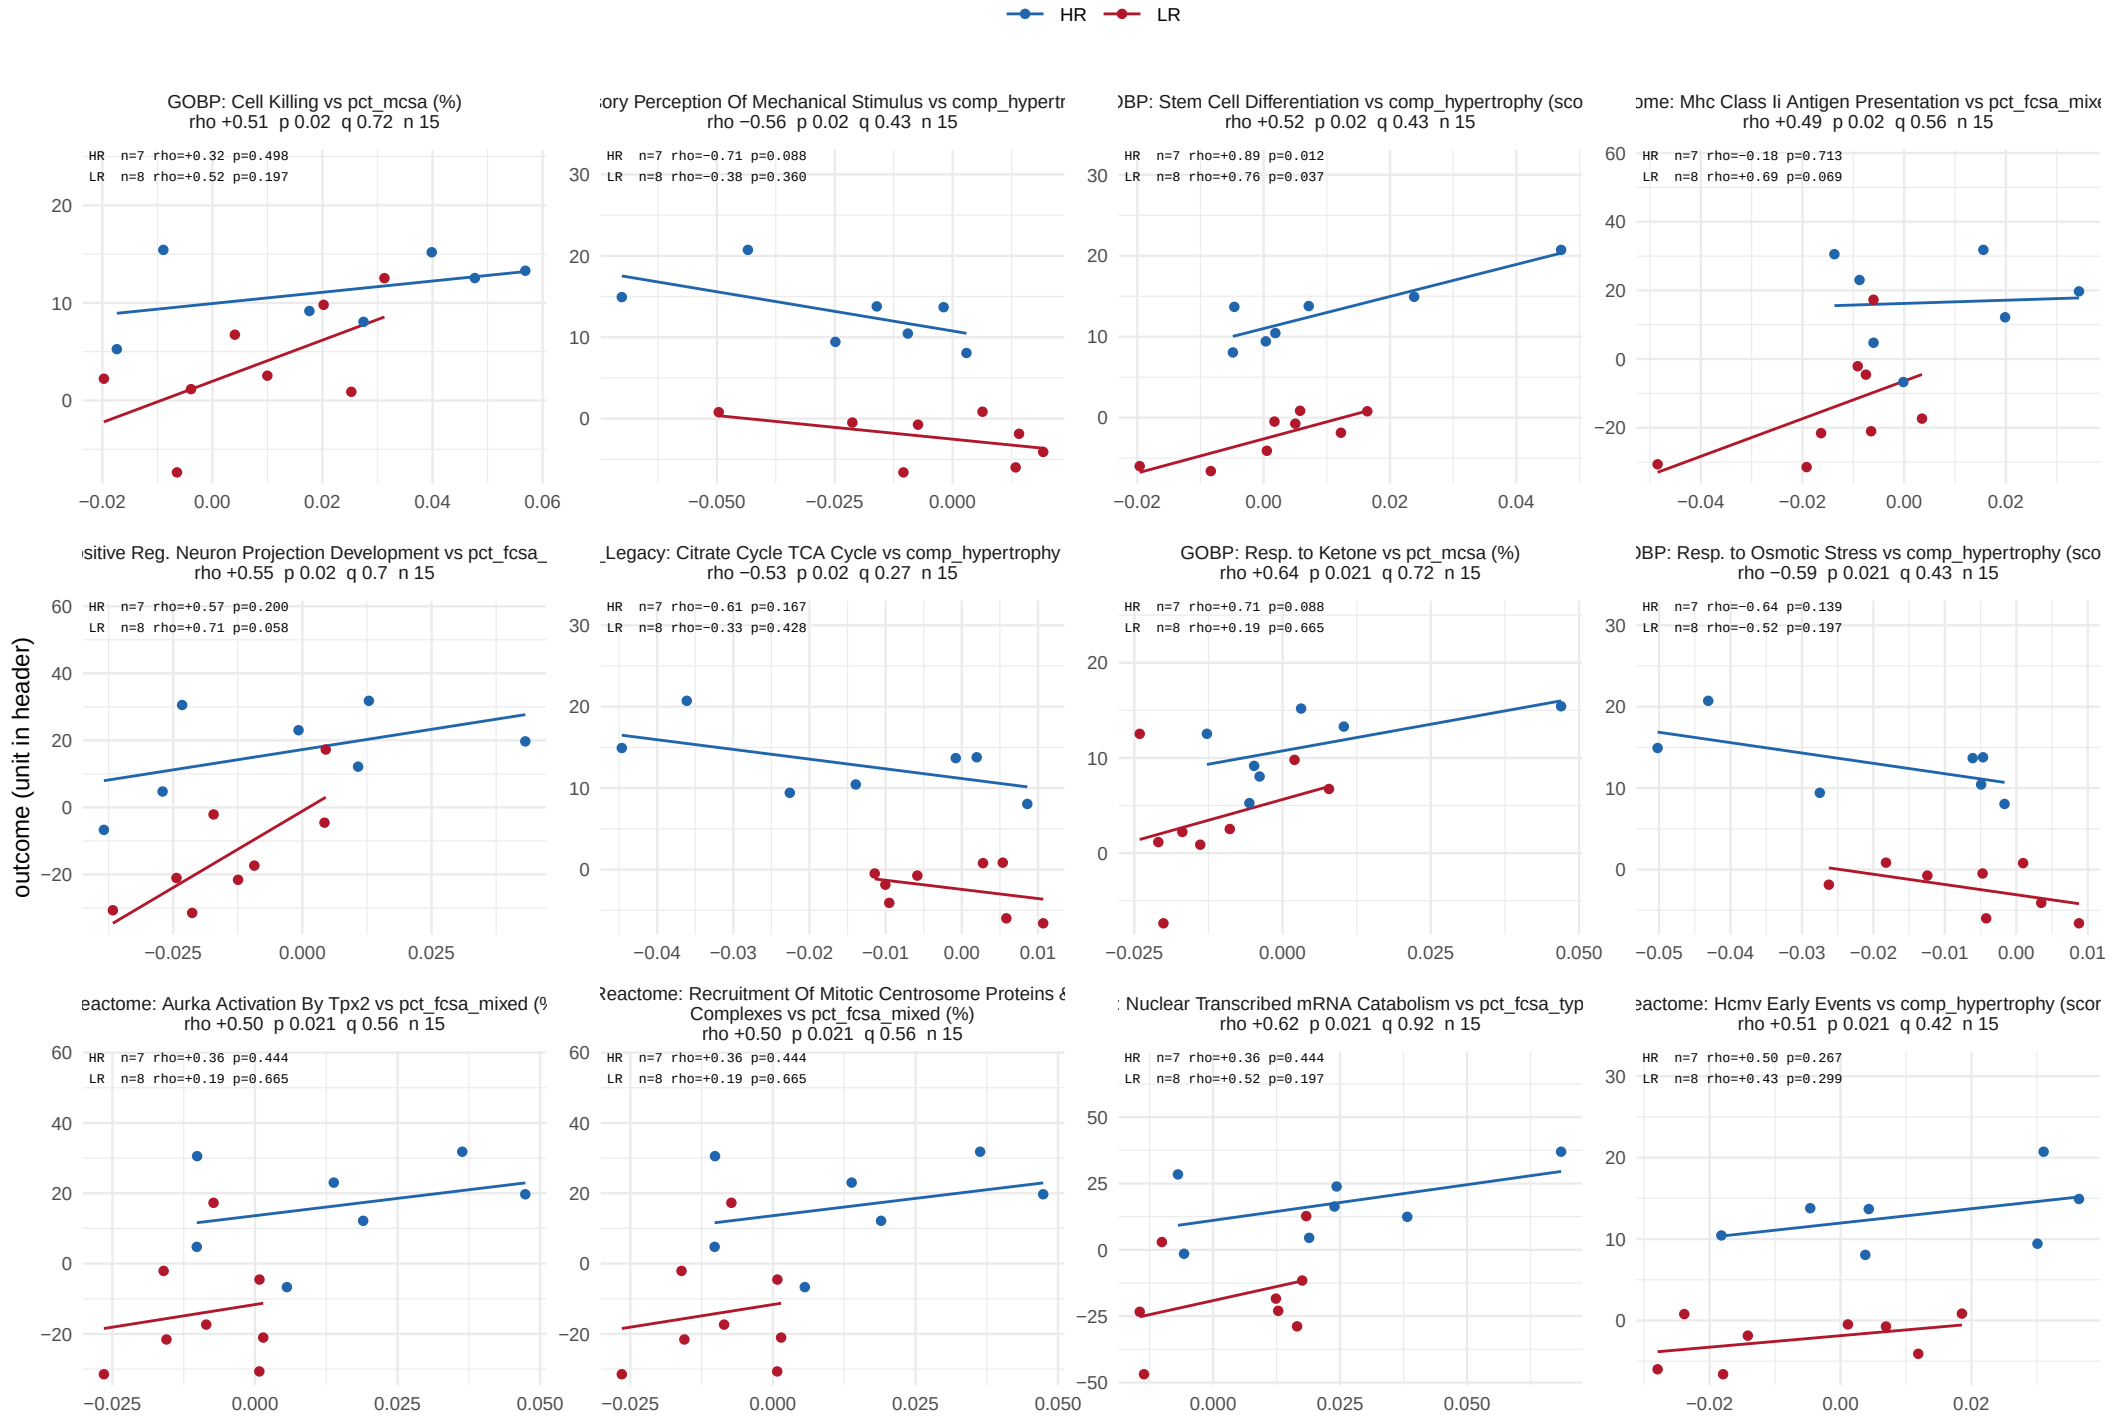

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


494 of 11024 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 17 of 42.

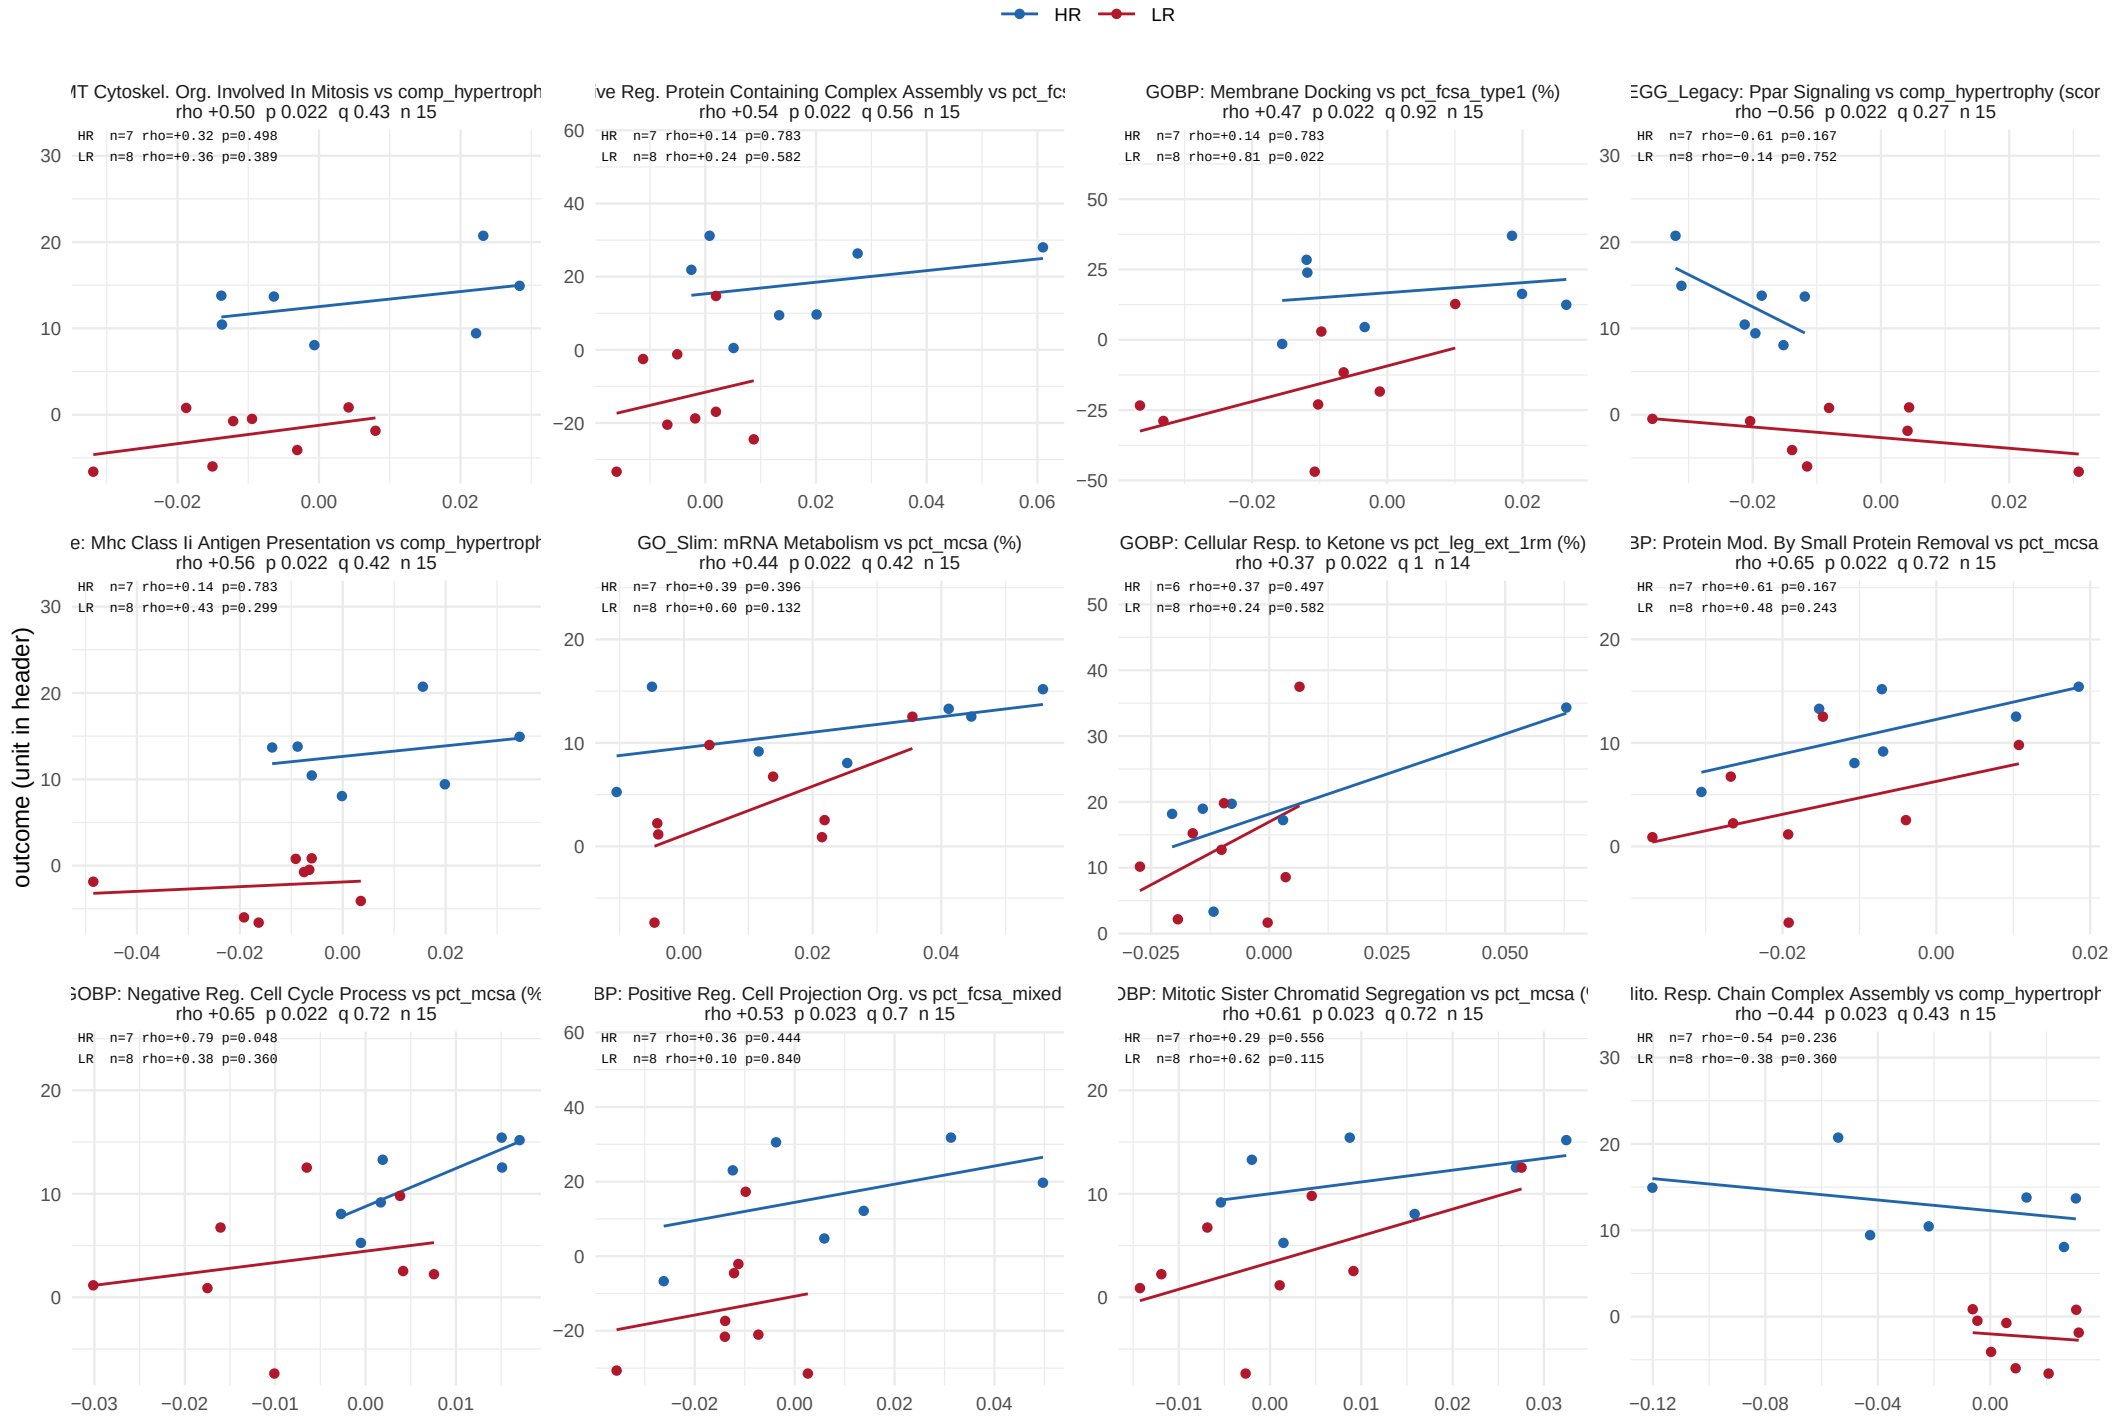

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


494 of 11024 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 18 of 42.

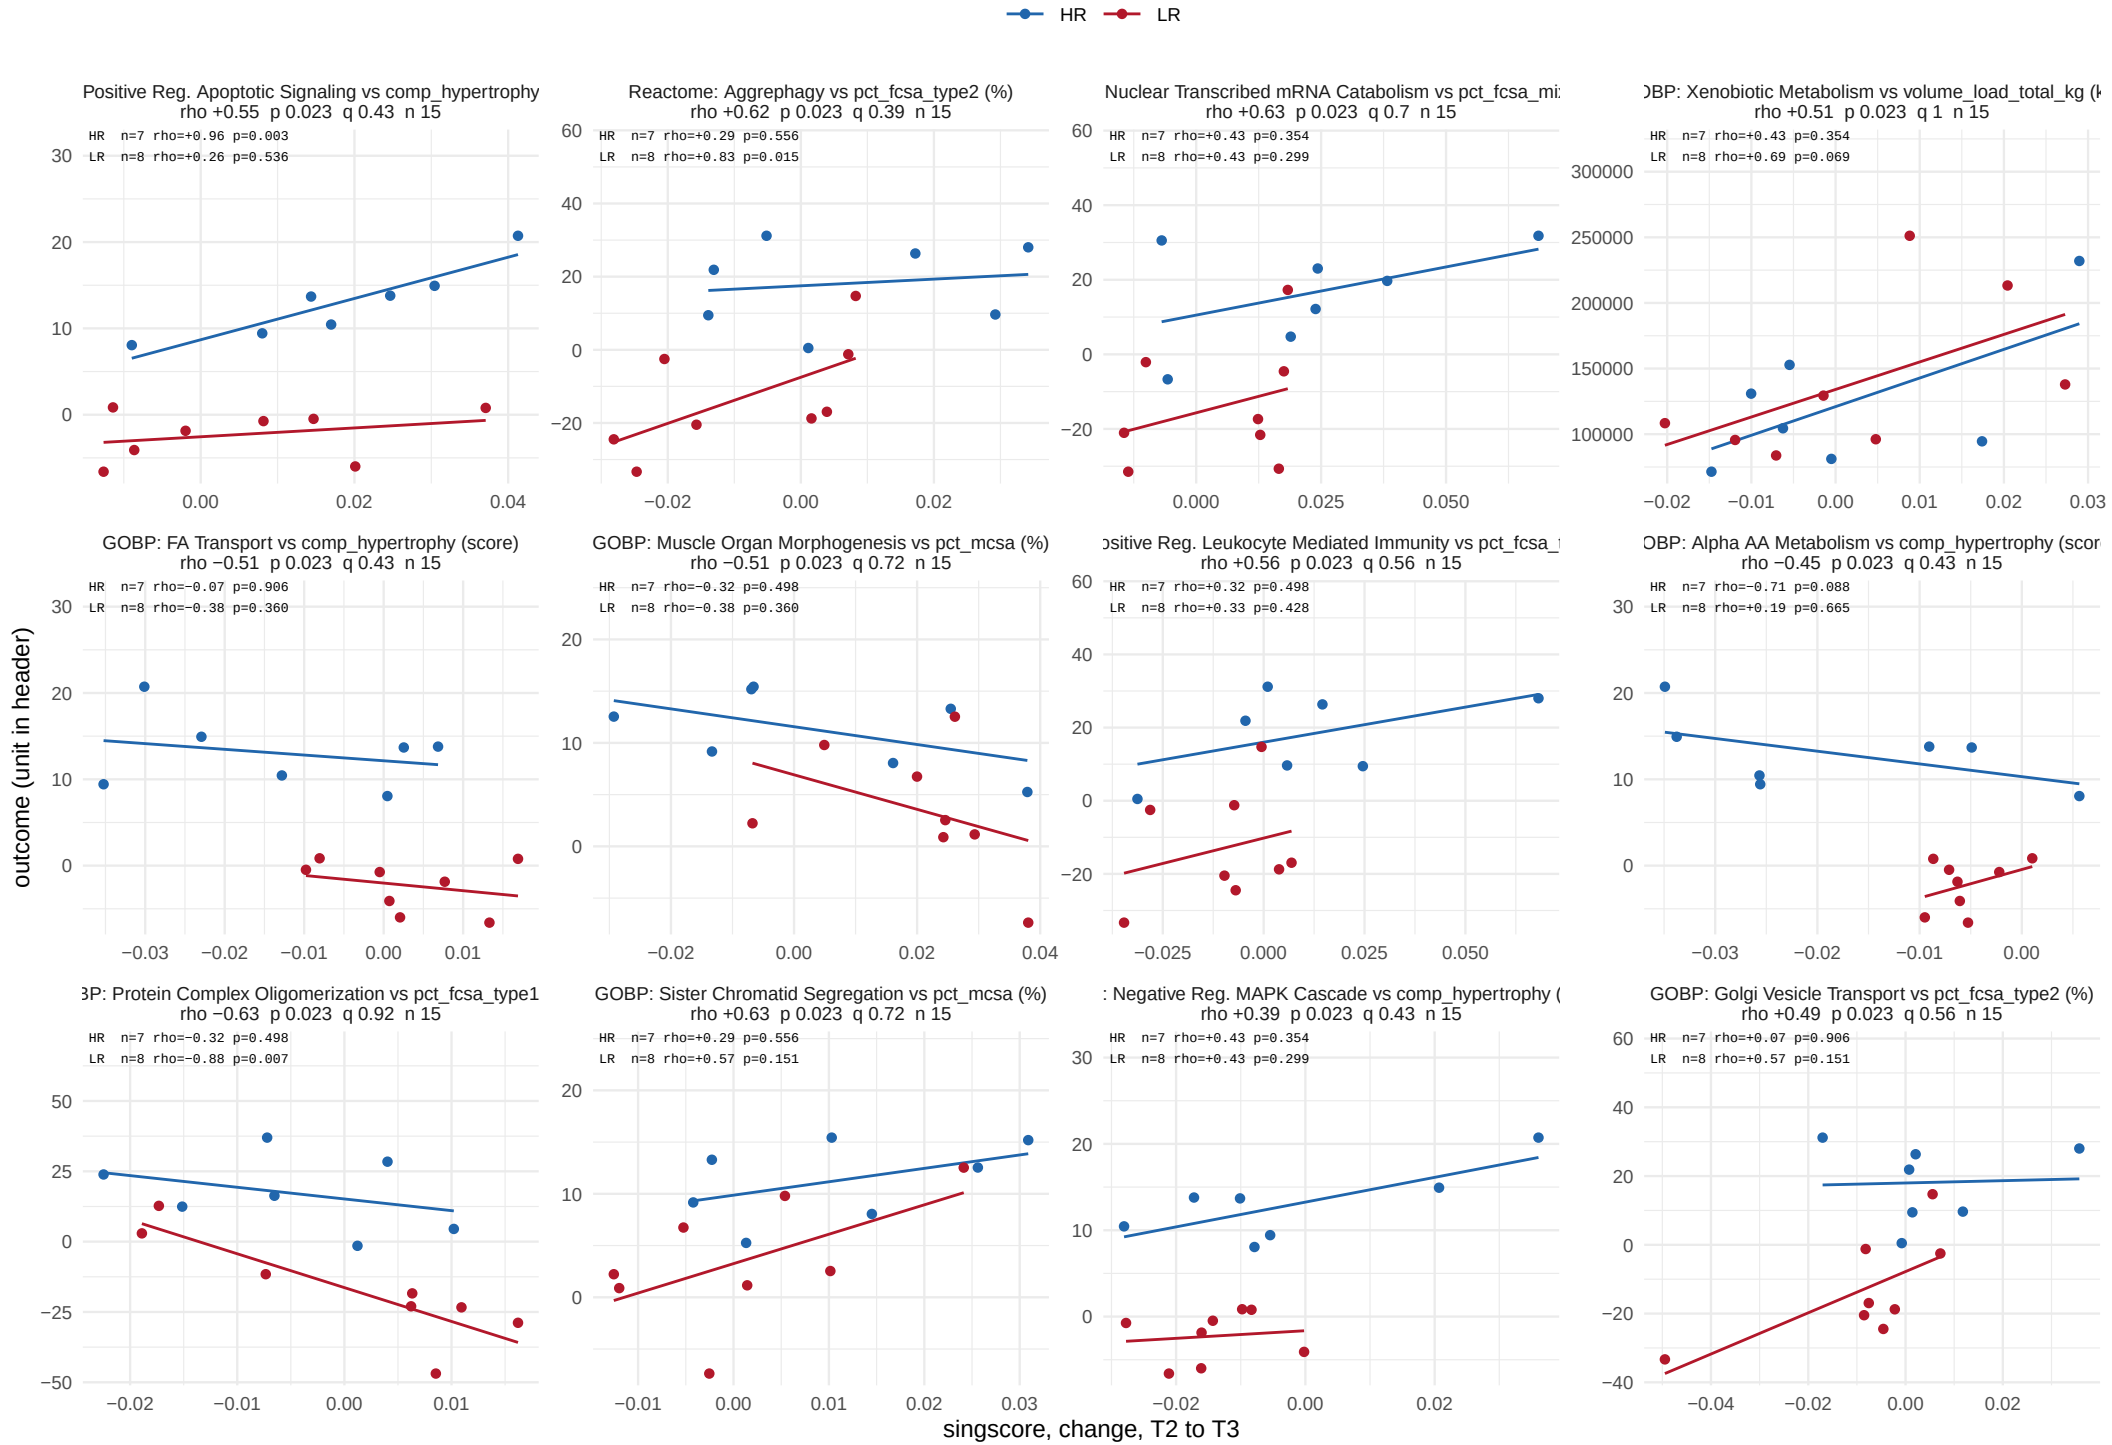

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


494 of 11024 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 19 of 42.

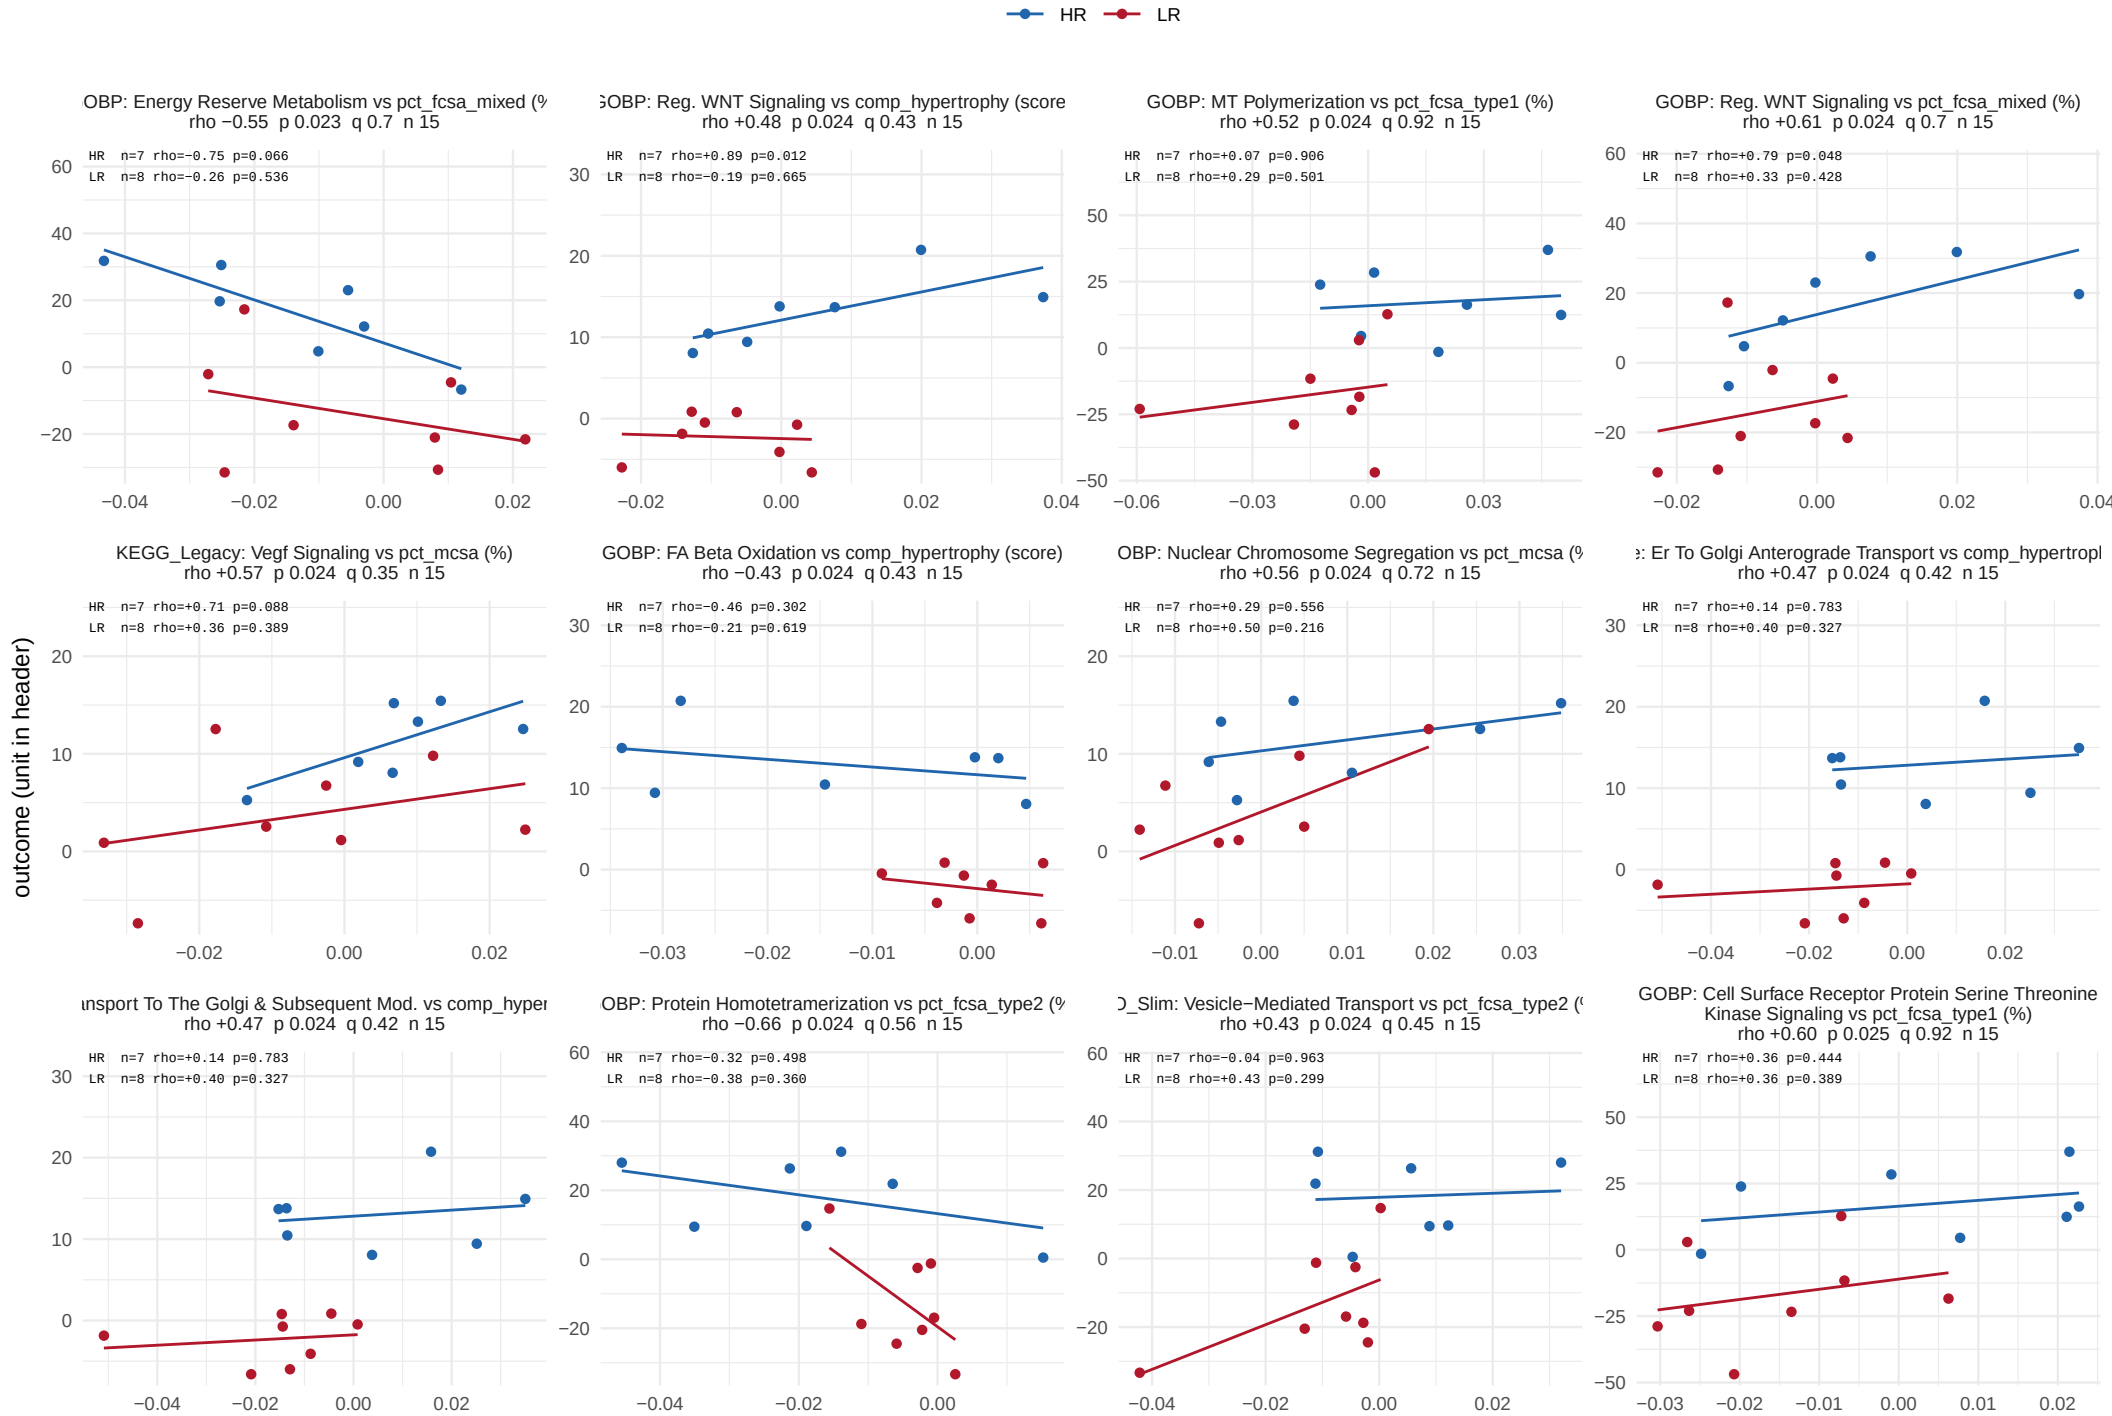

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


494 of 11024 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 20 of 42.

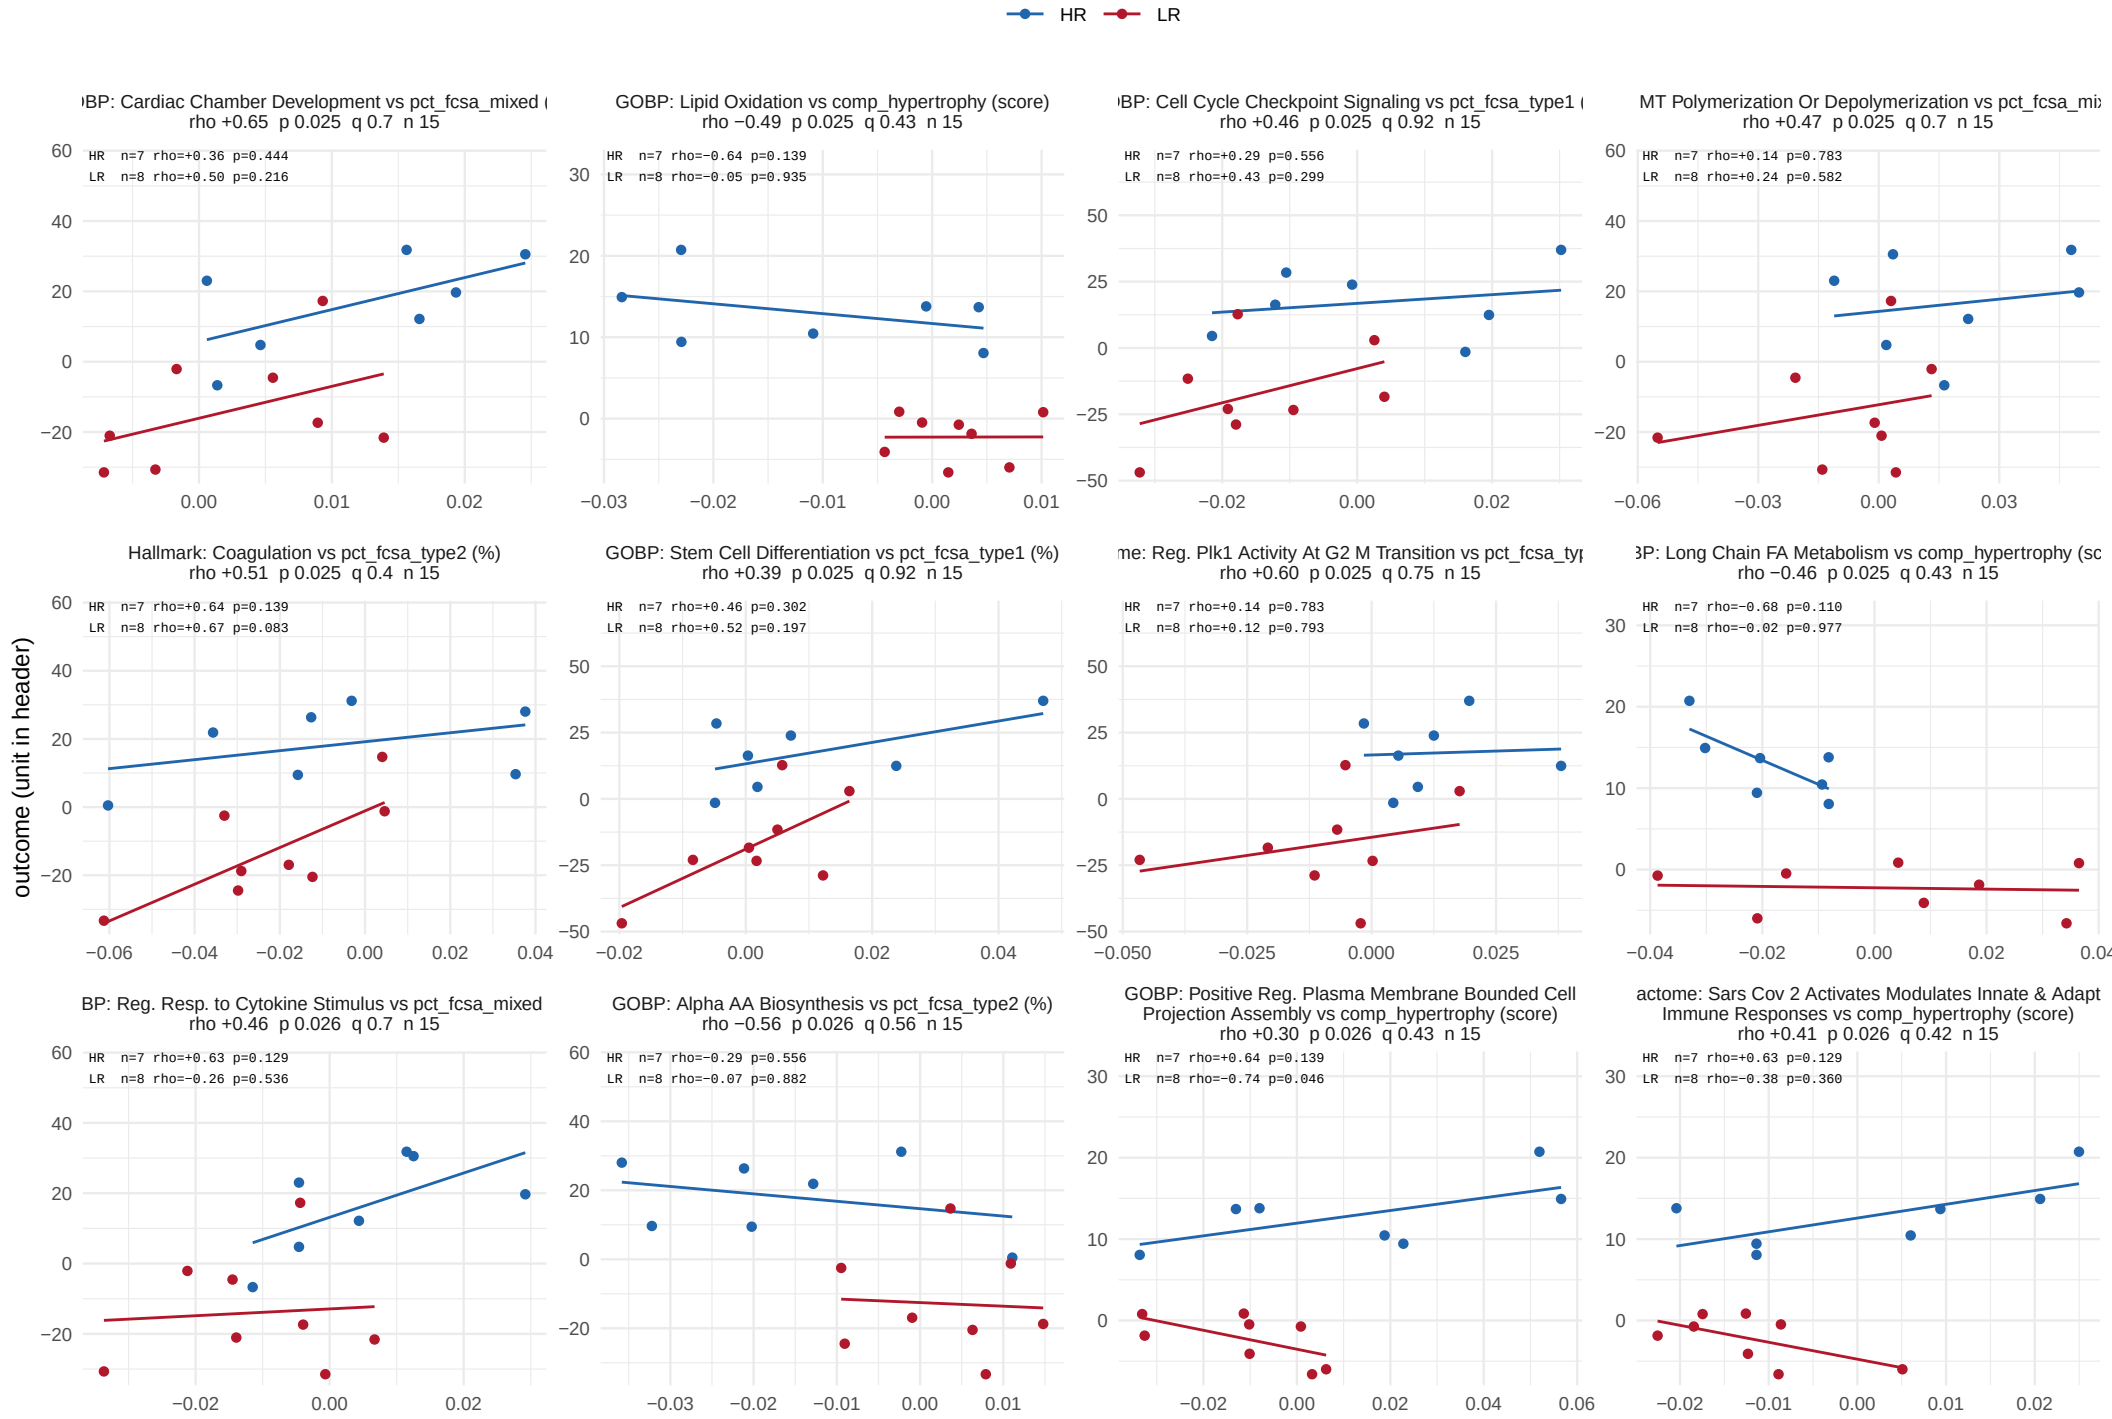

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


494 of 11024 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 21 of 42.

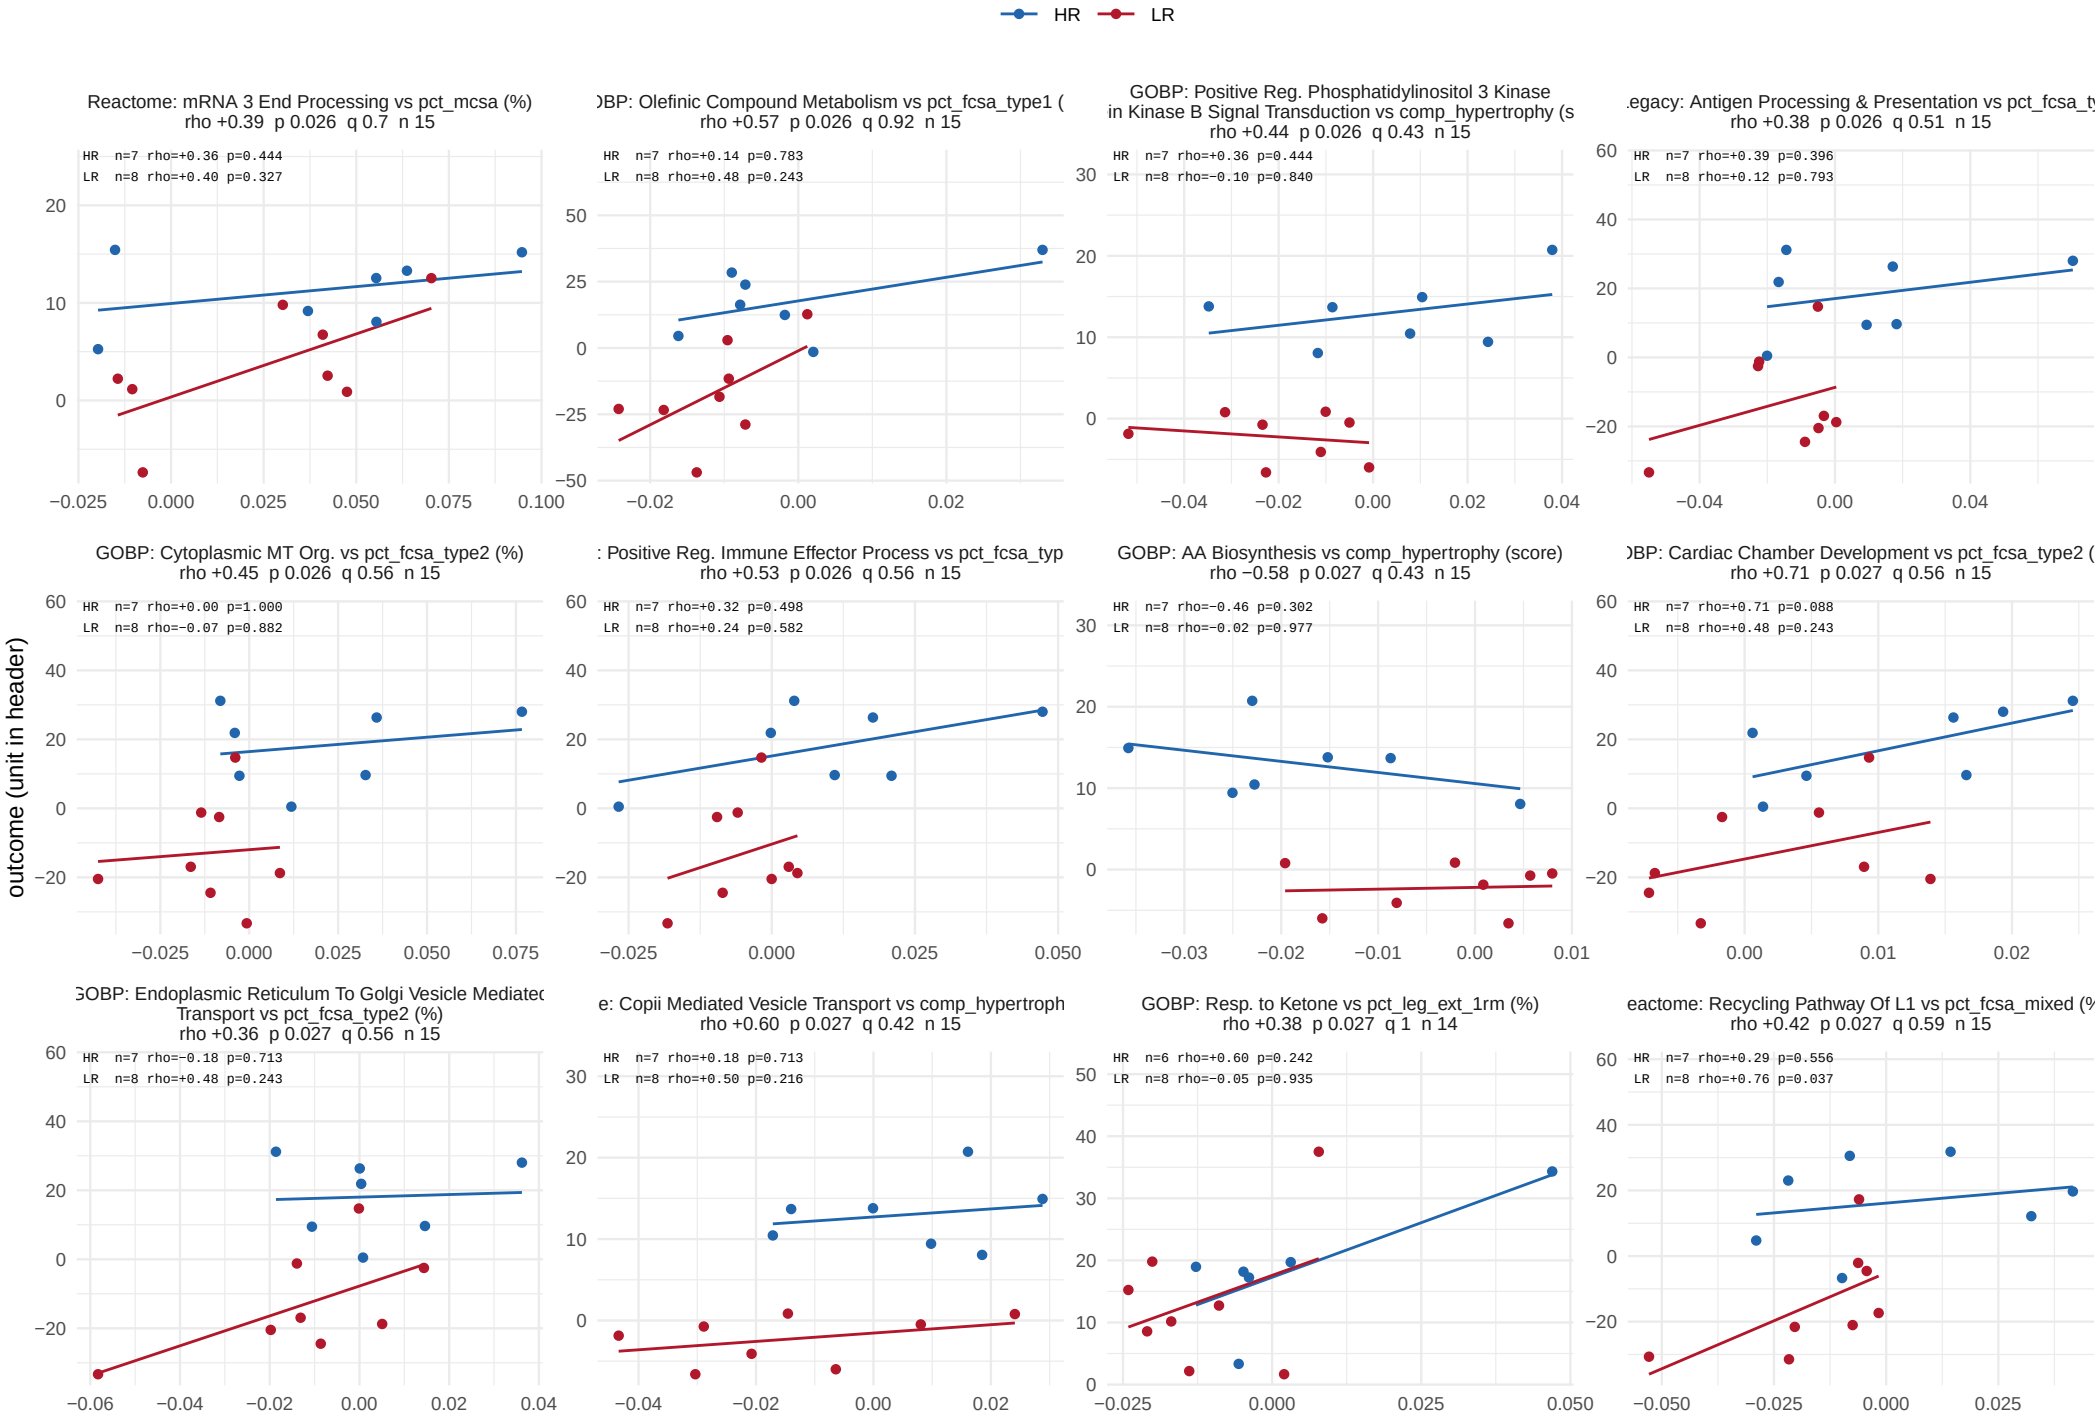

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


494 of 11024 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 22 of 42.

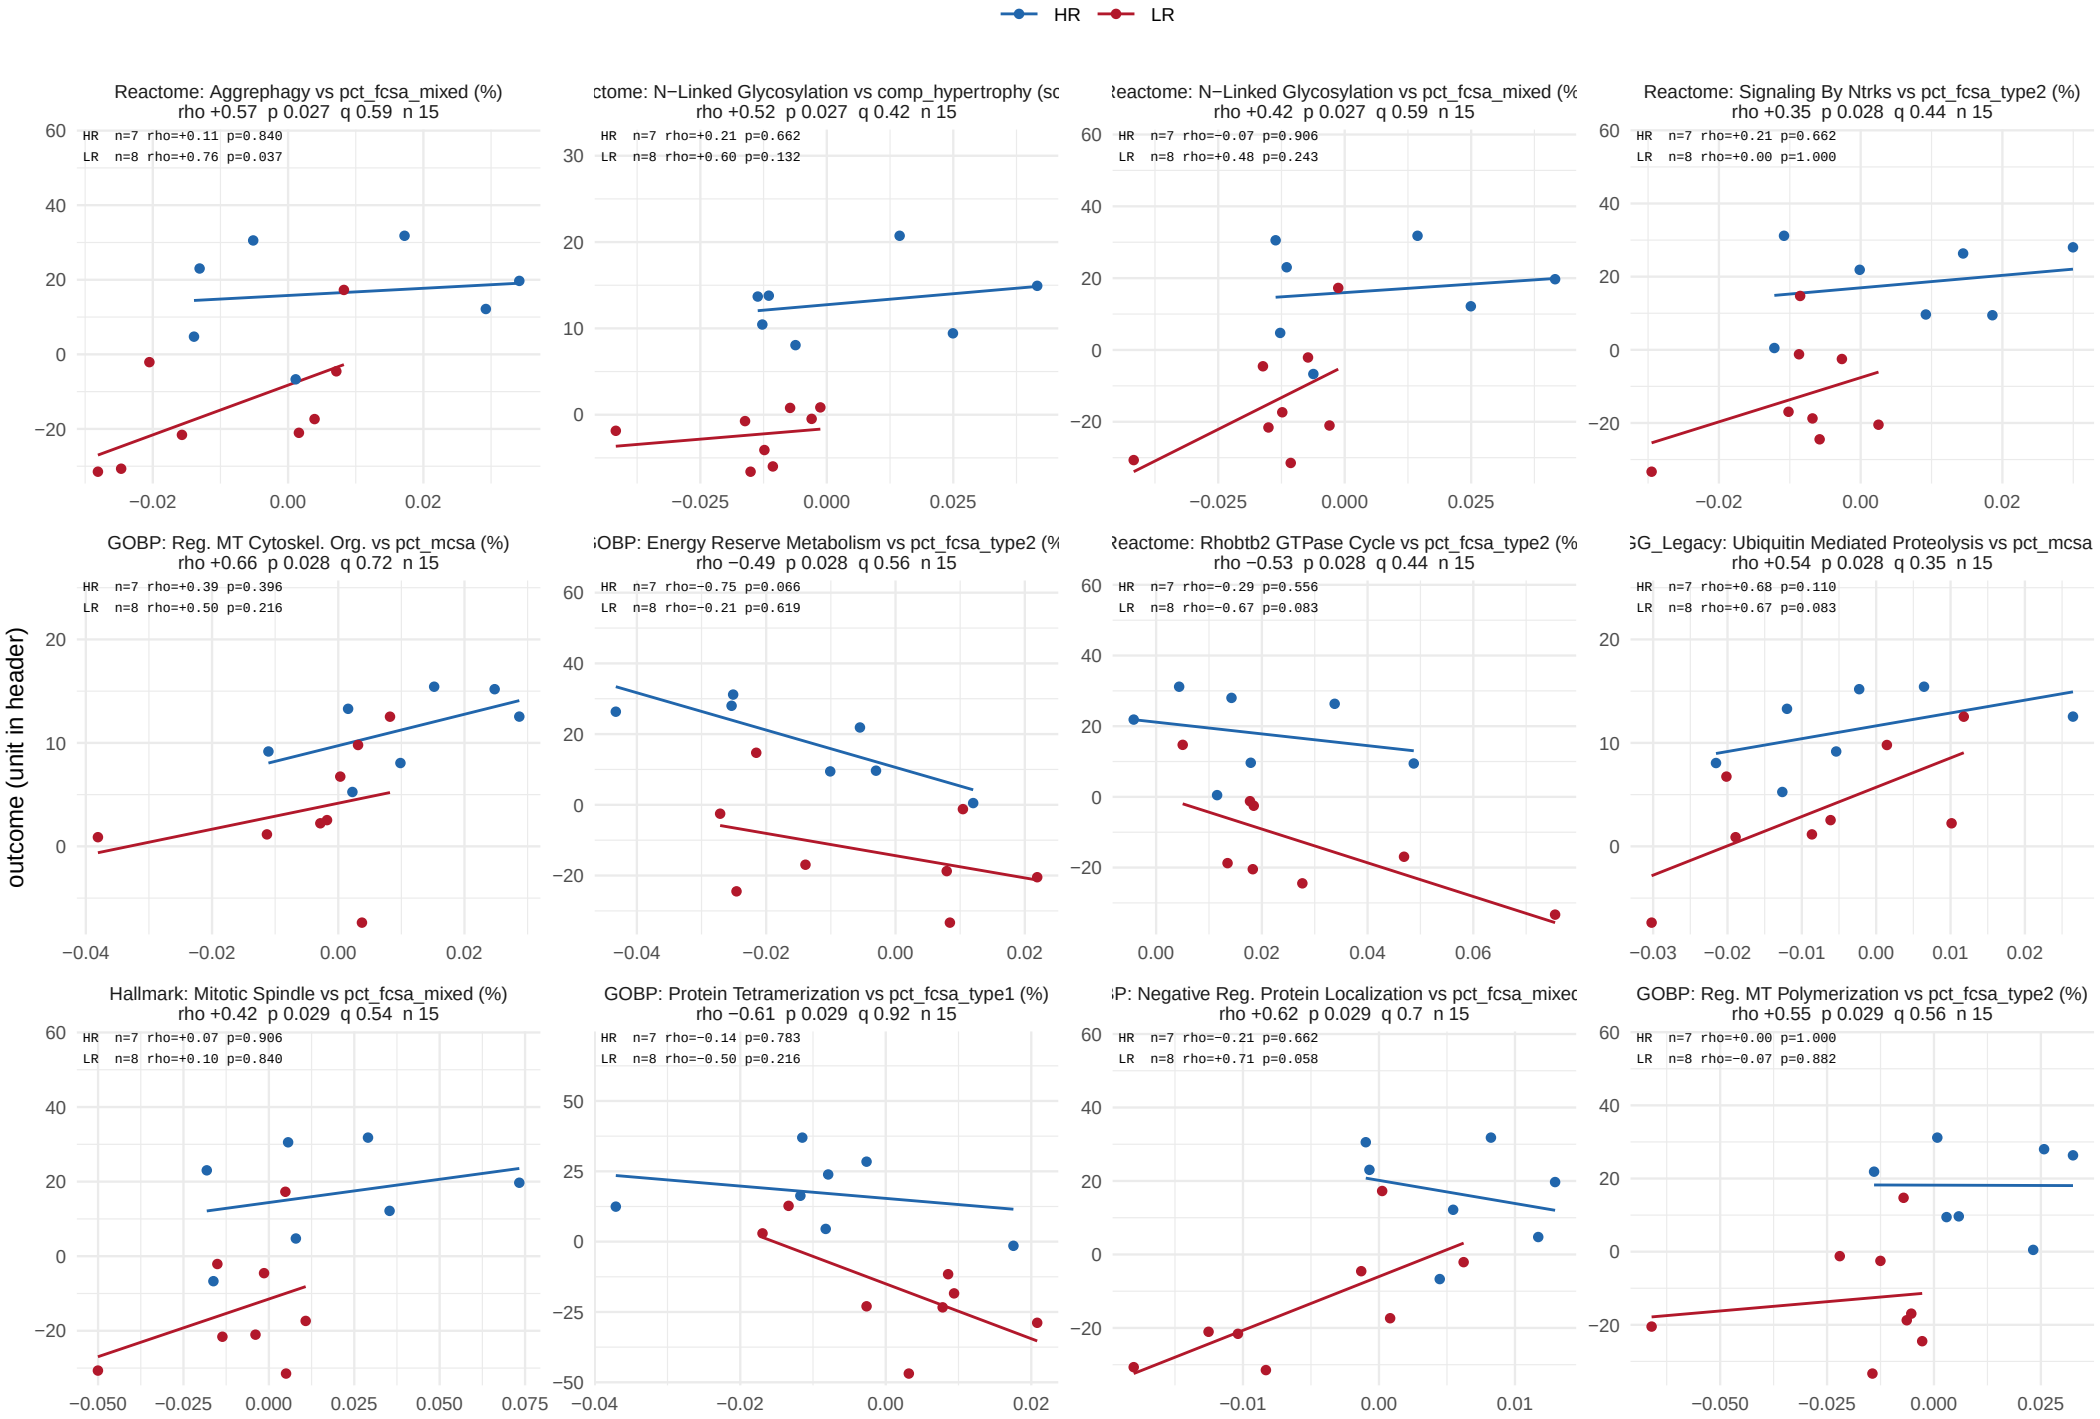

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


494 of 11024 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 23 of 42.

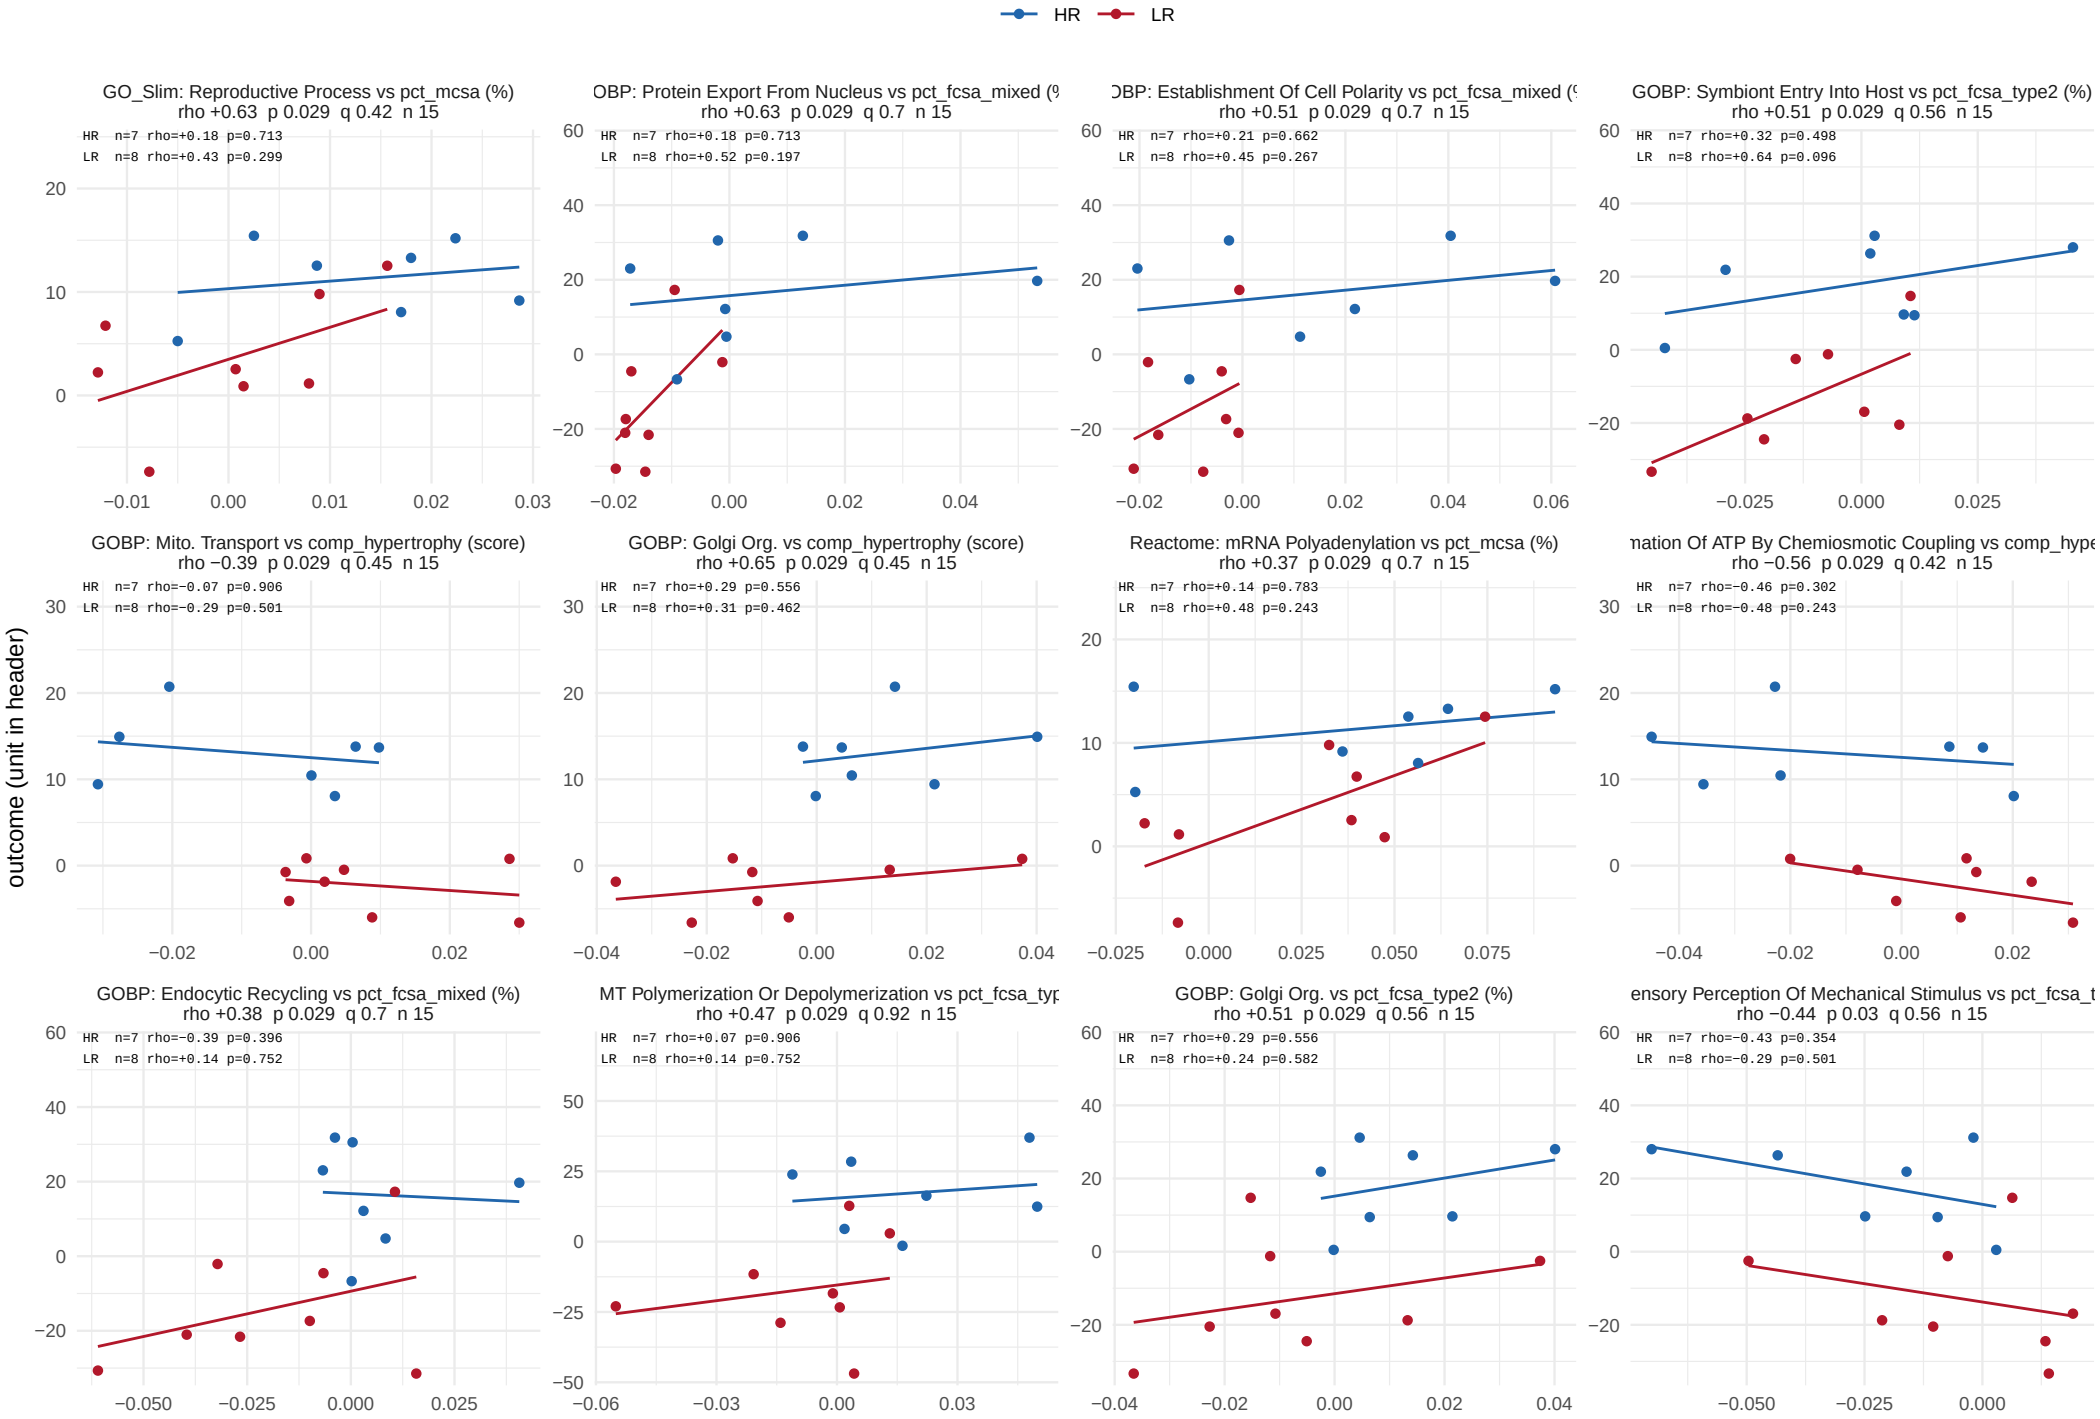

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


494 of 11024 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 24 of 42.

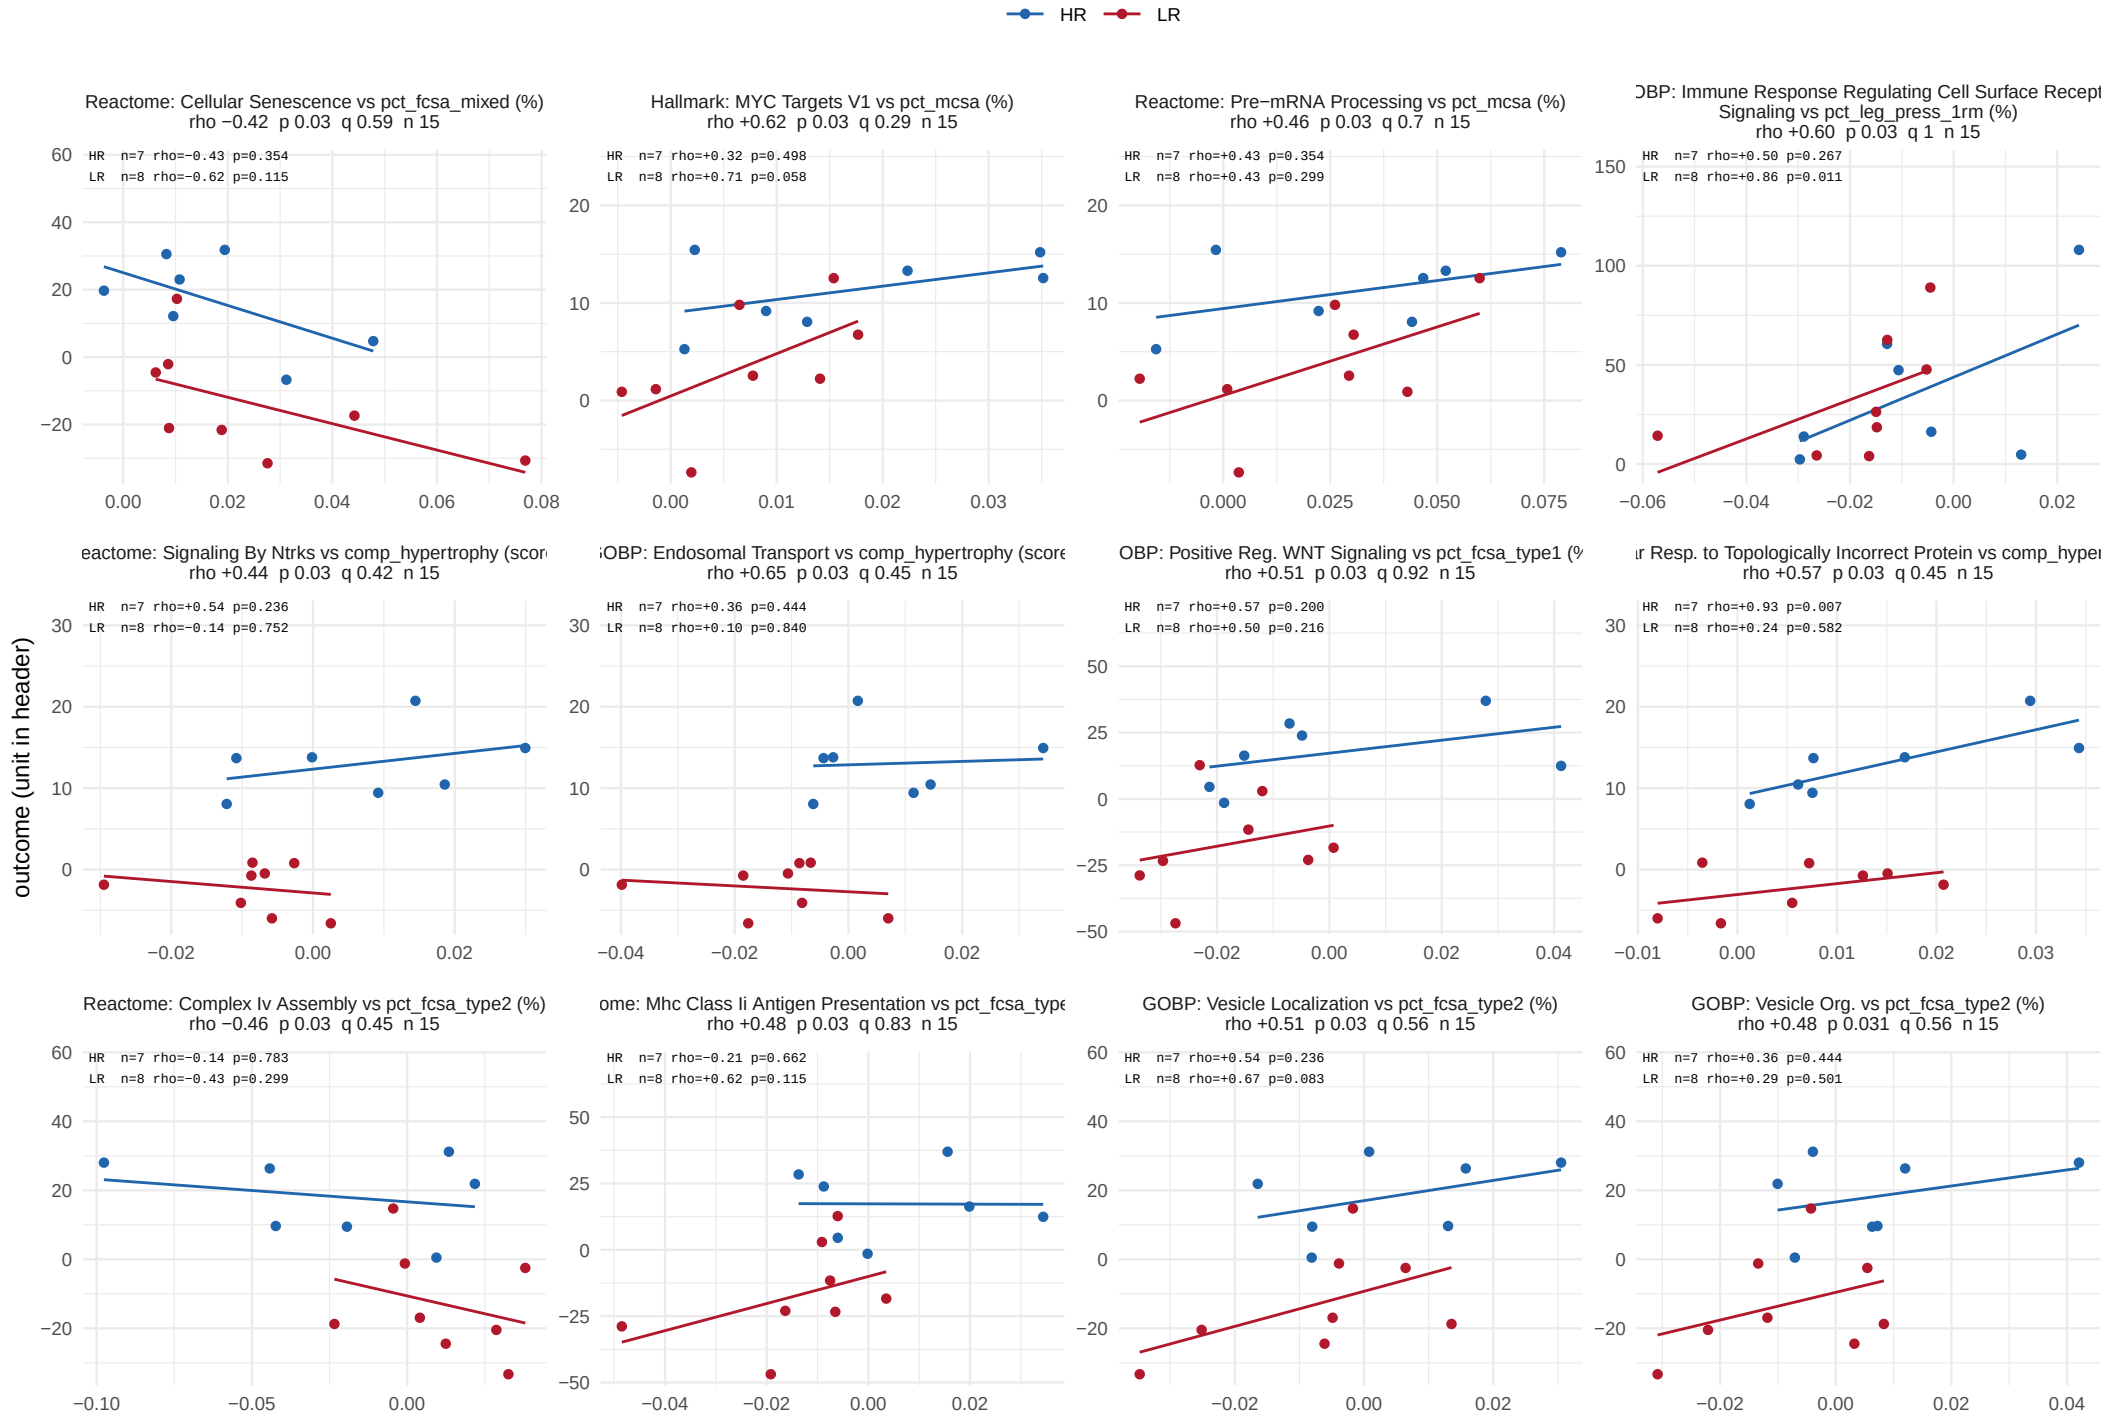

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


494 of 11024 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 25 of 42.

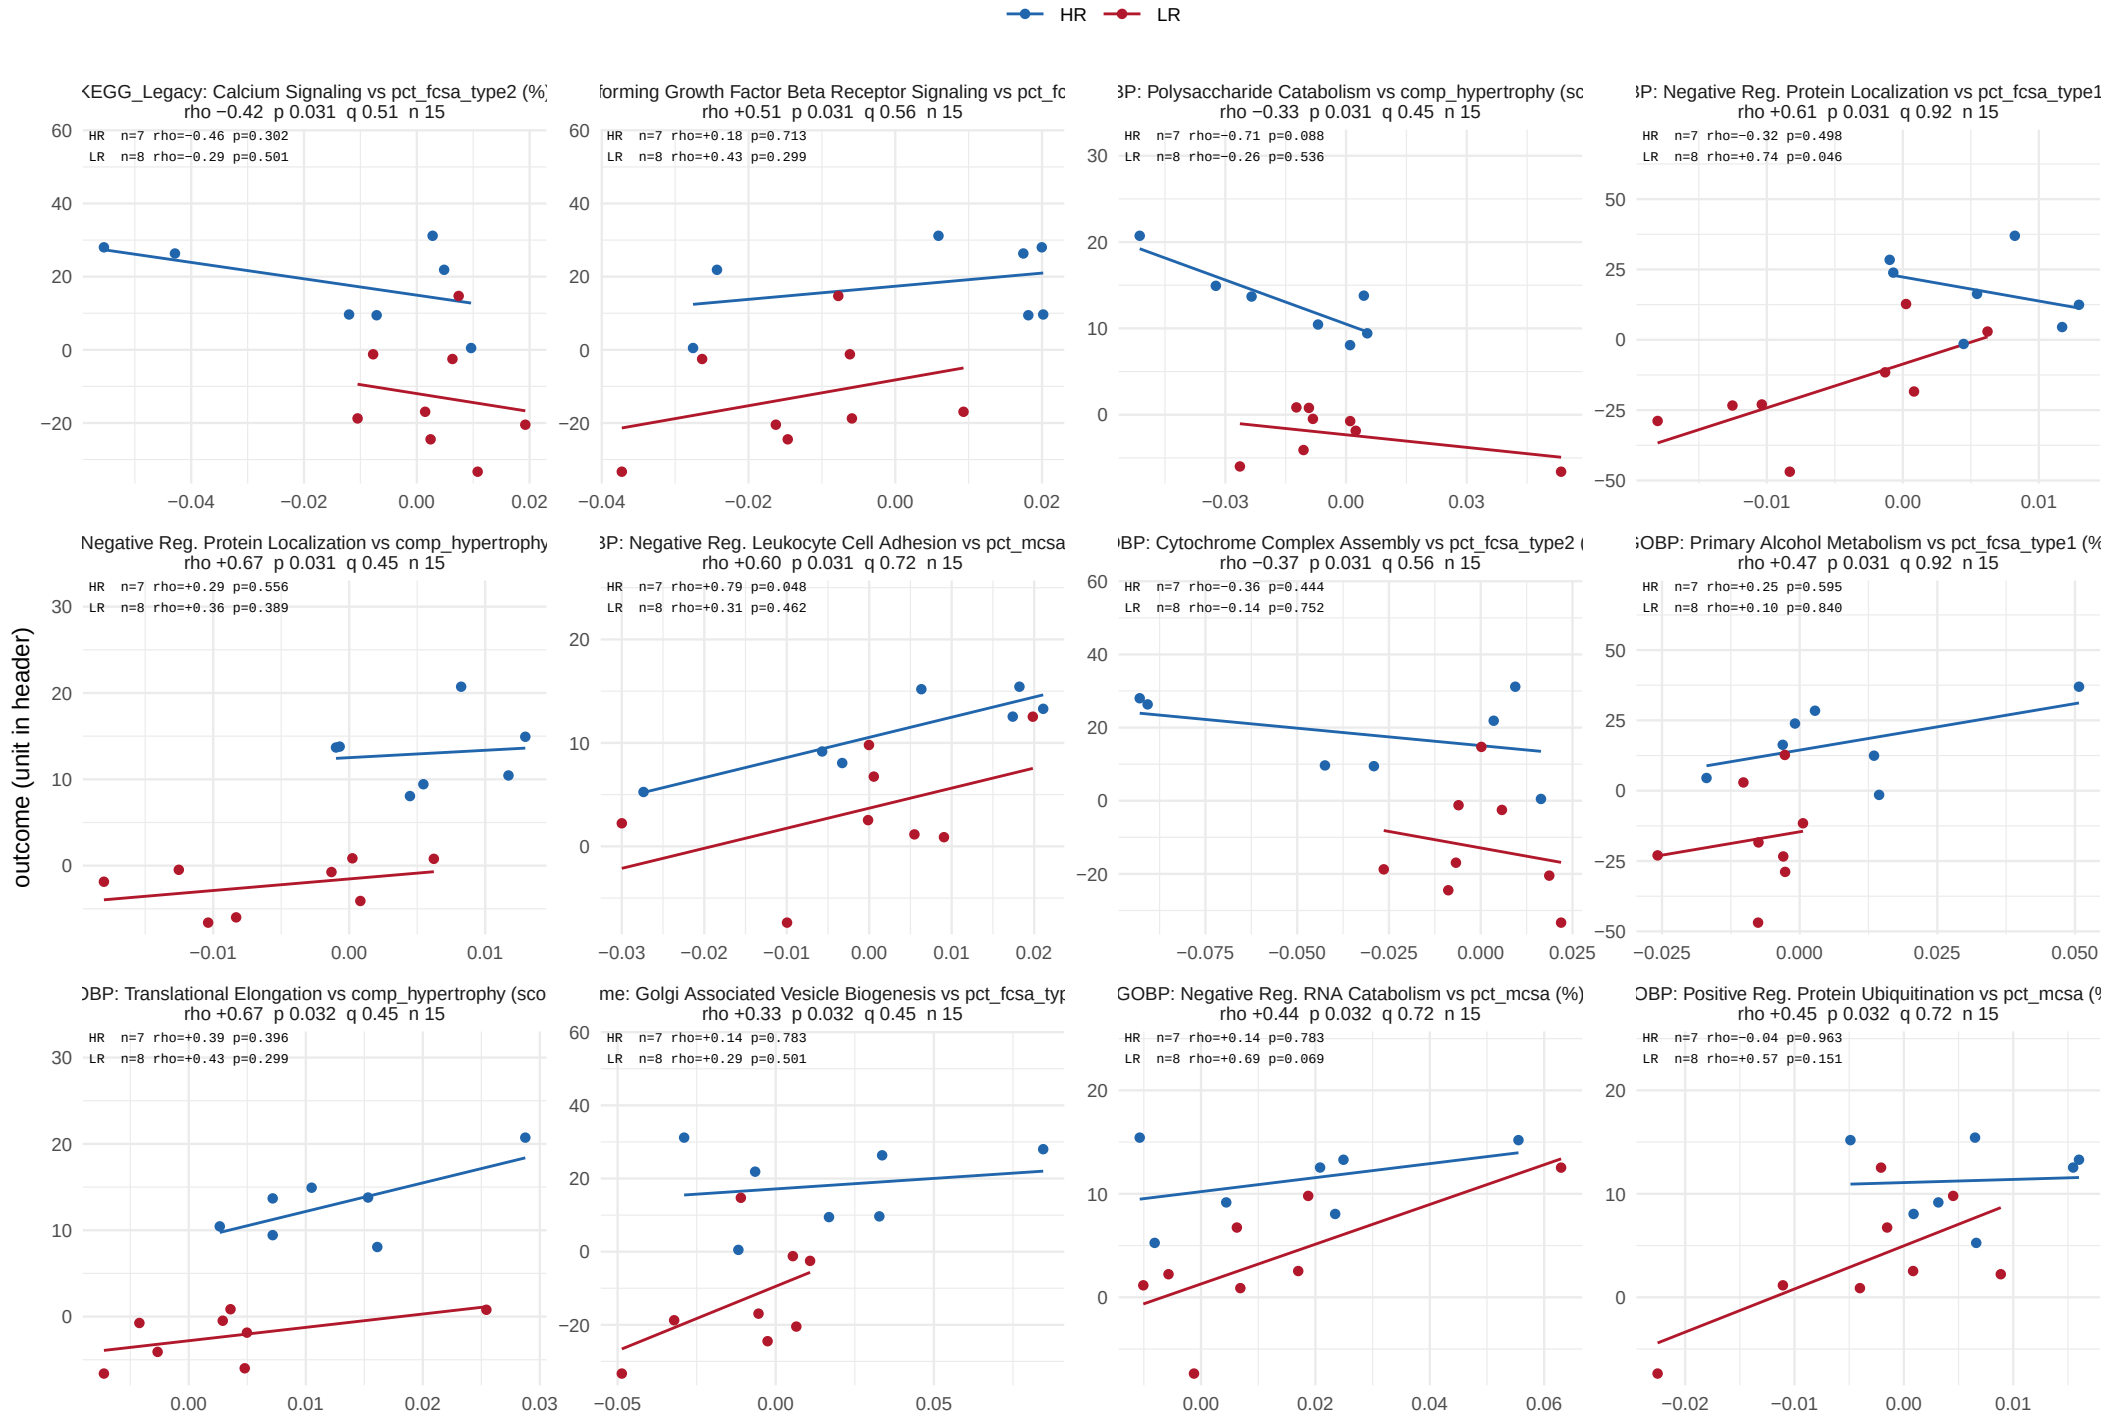

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


494 of 11024 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 26 of 42.

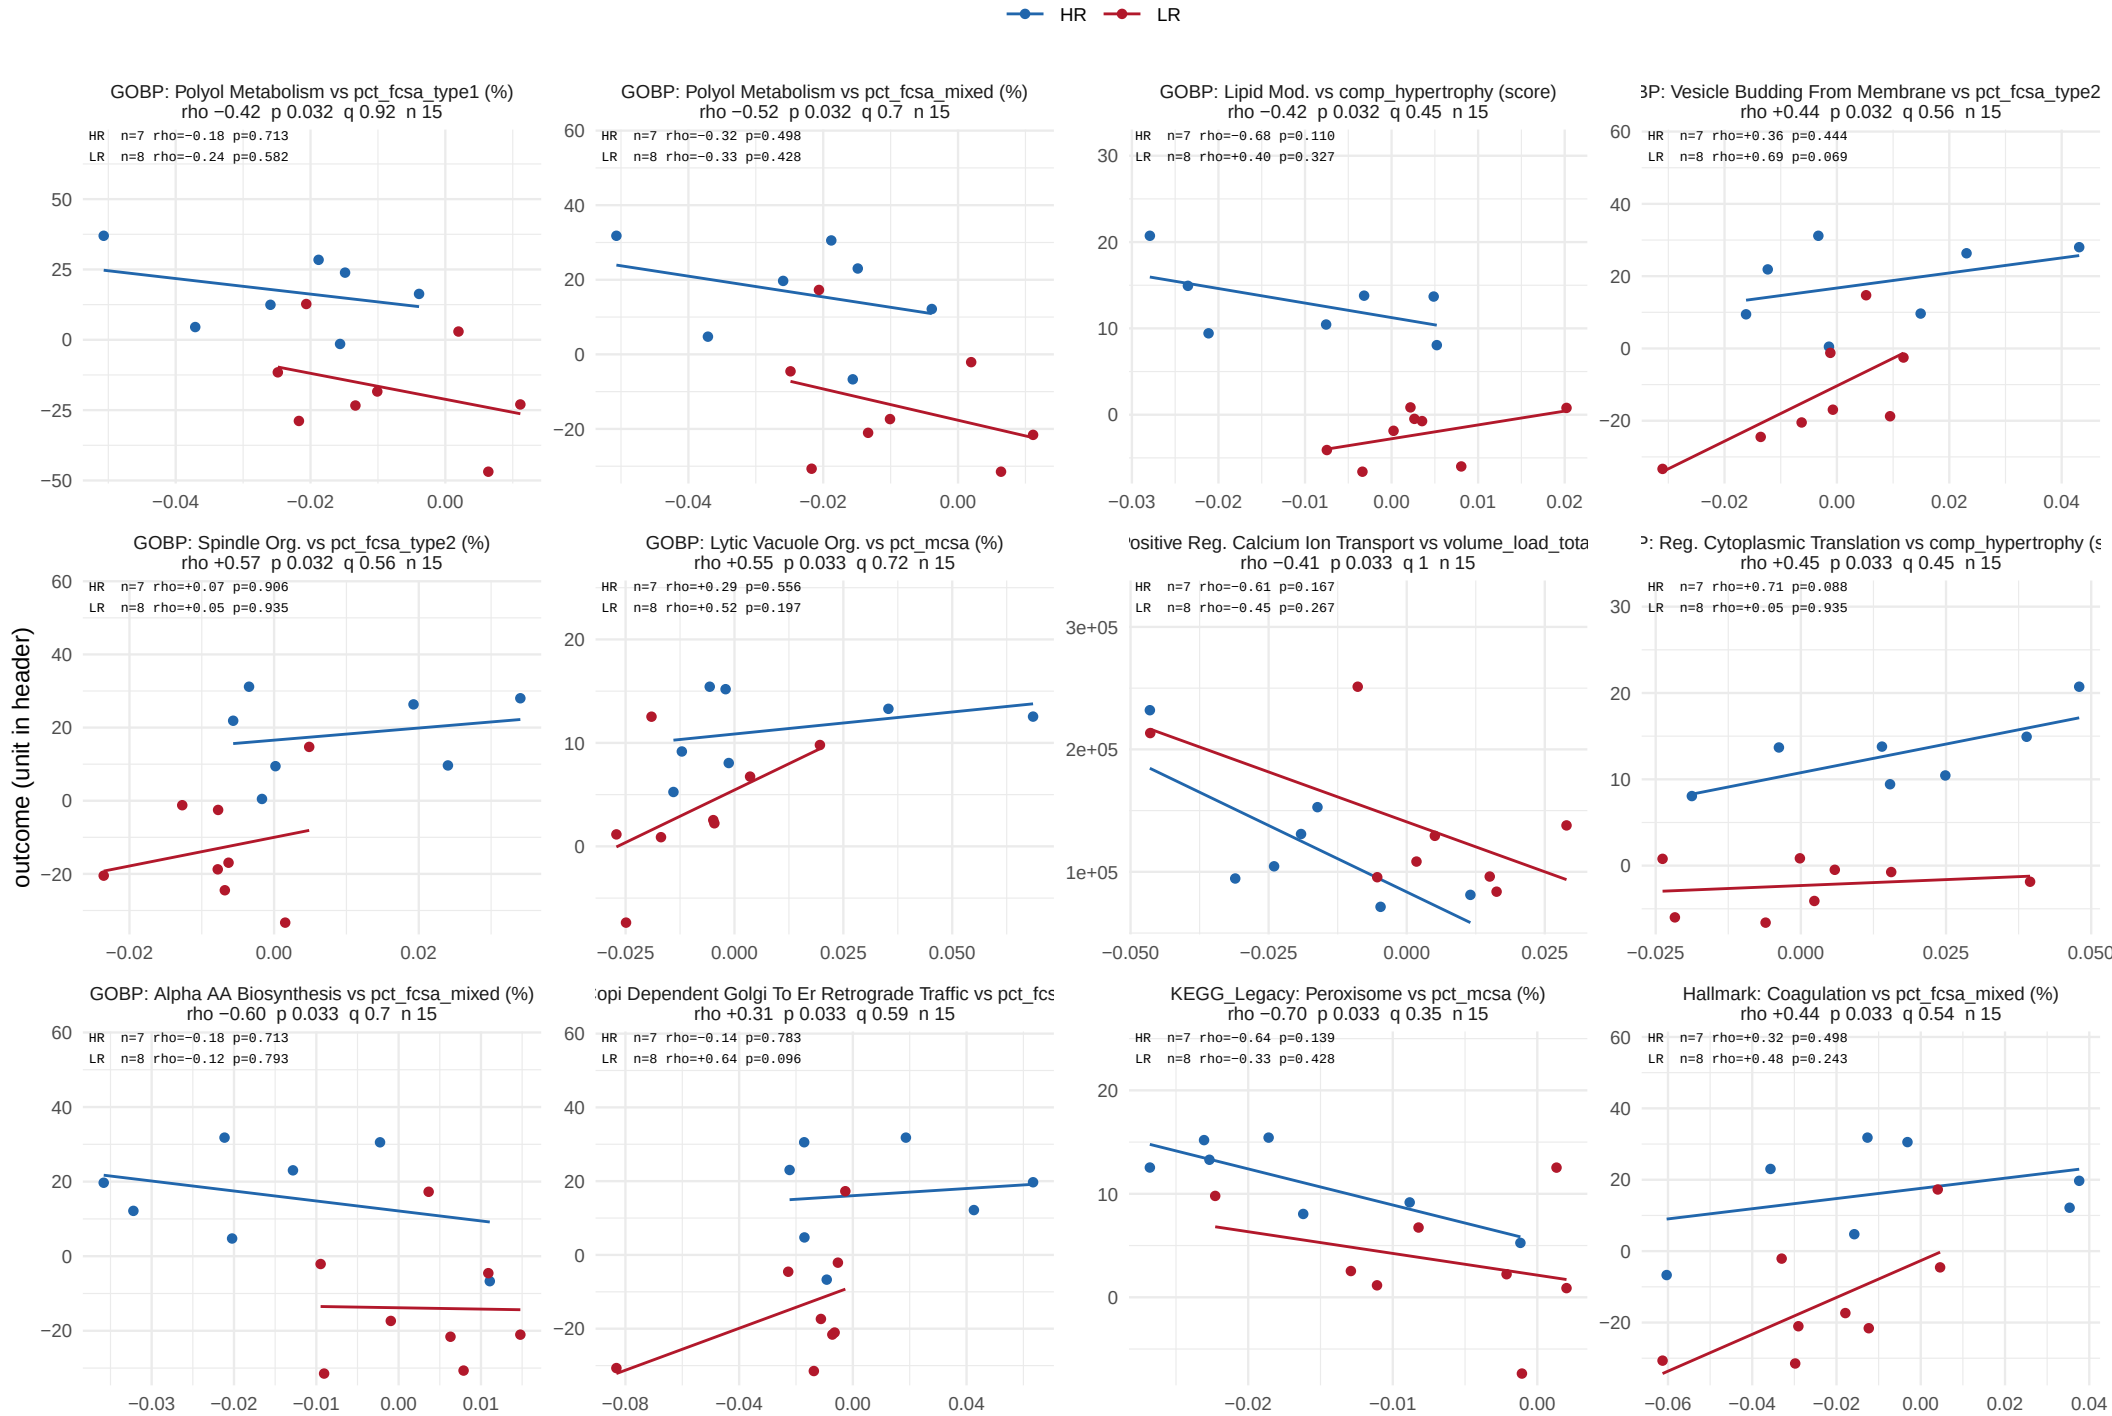

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


494 of 11024 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 27 of 42.

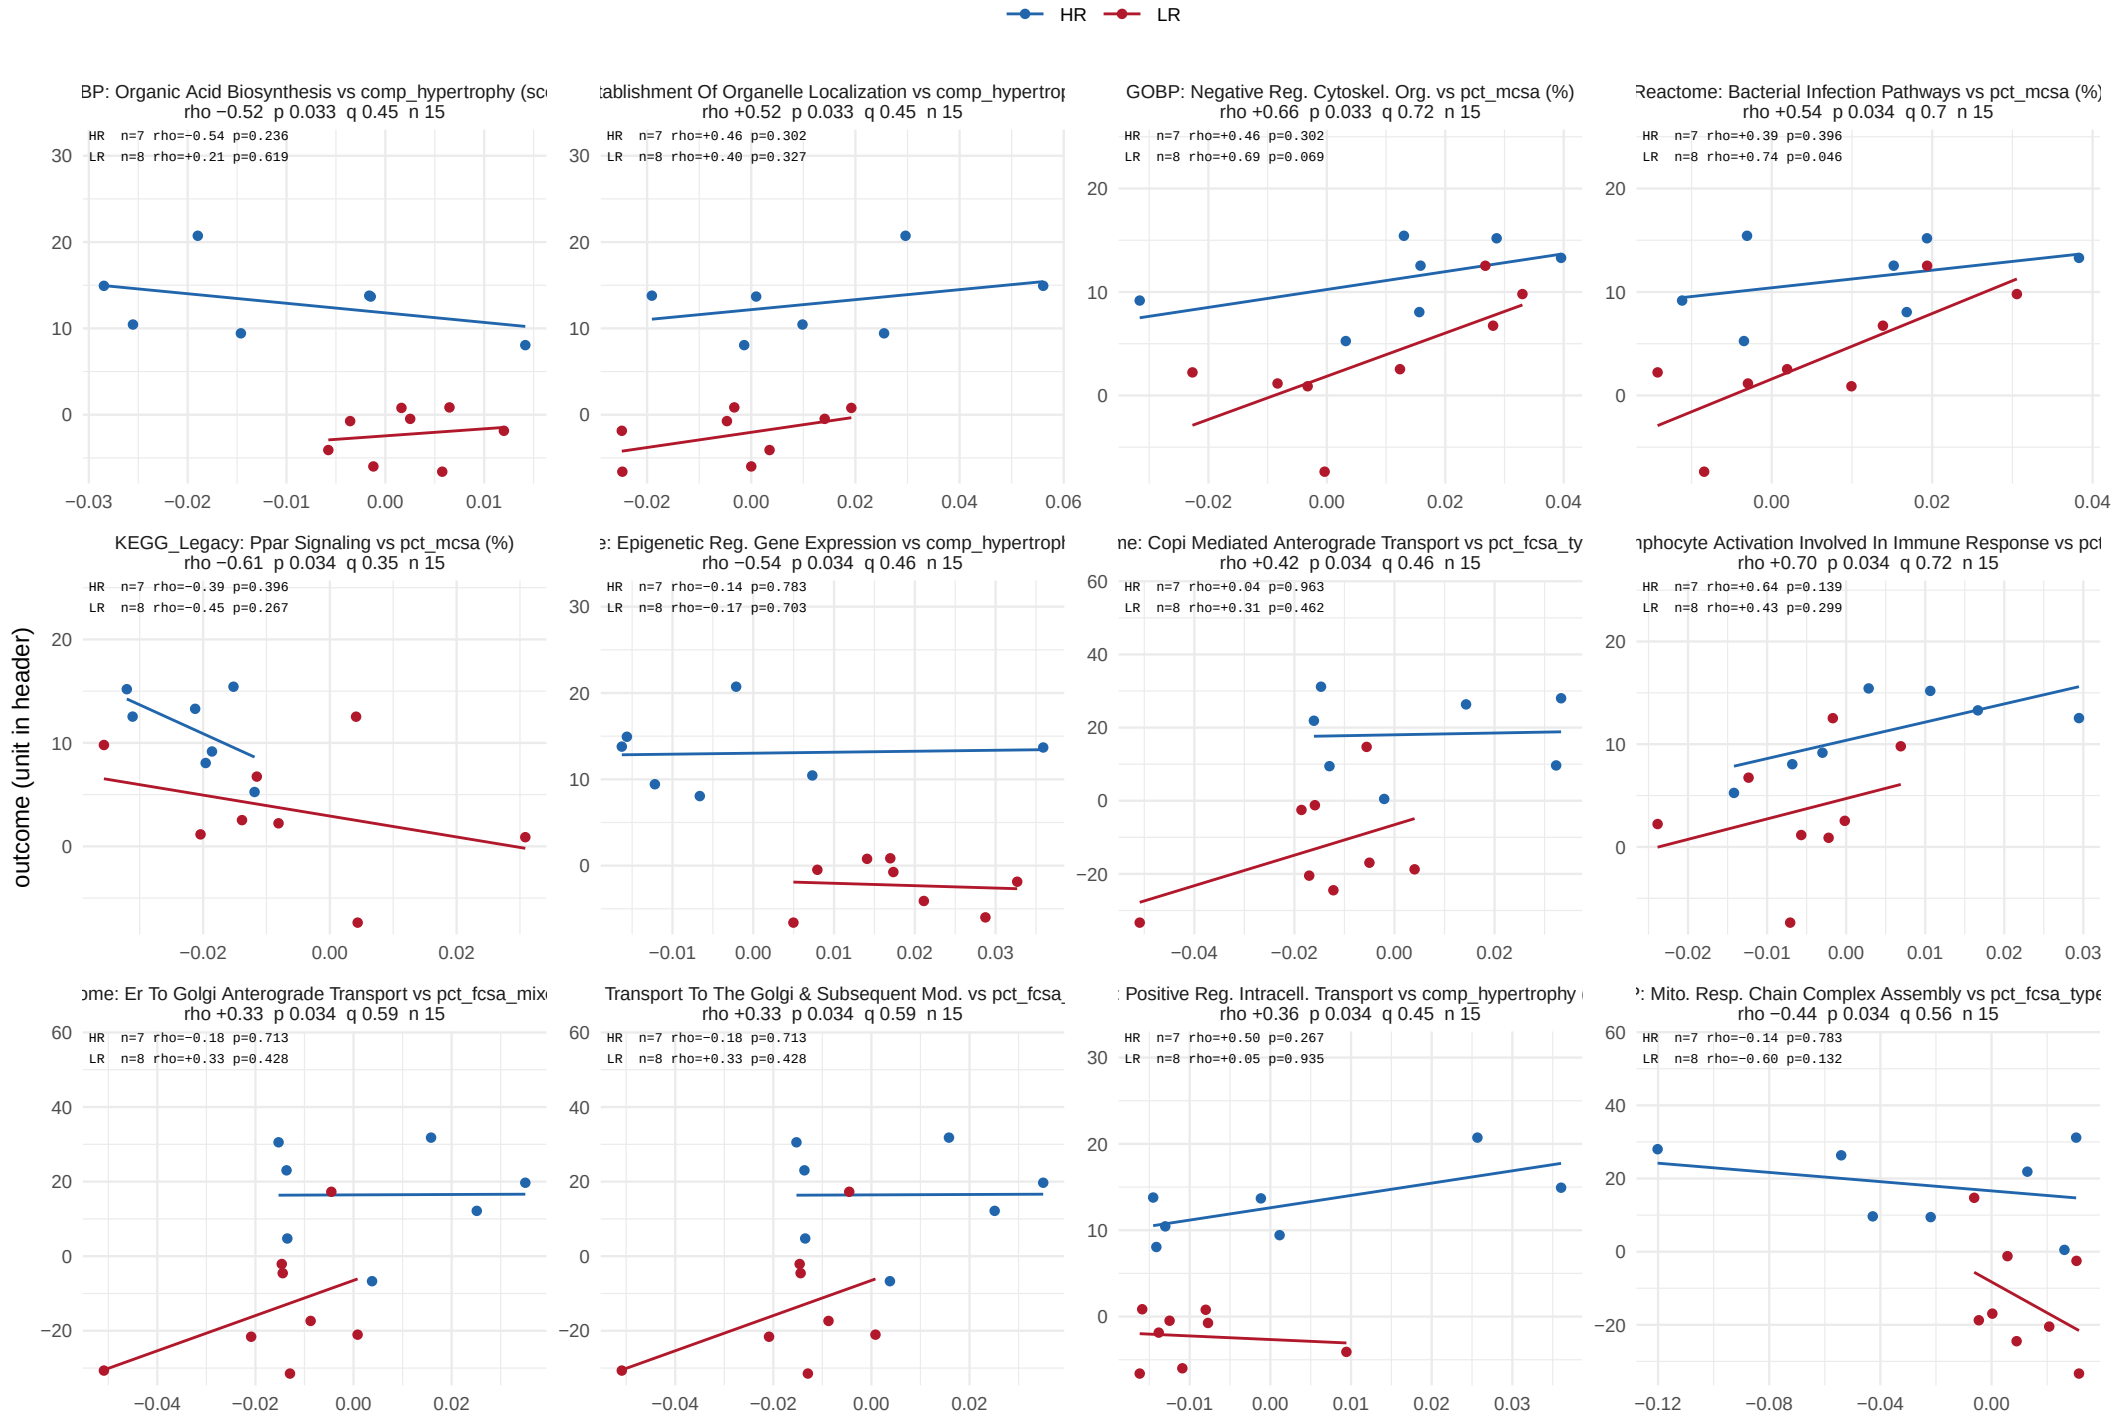

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


494 of 11024 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 28 of 42.

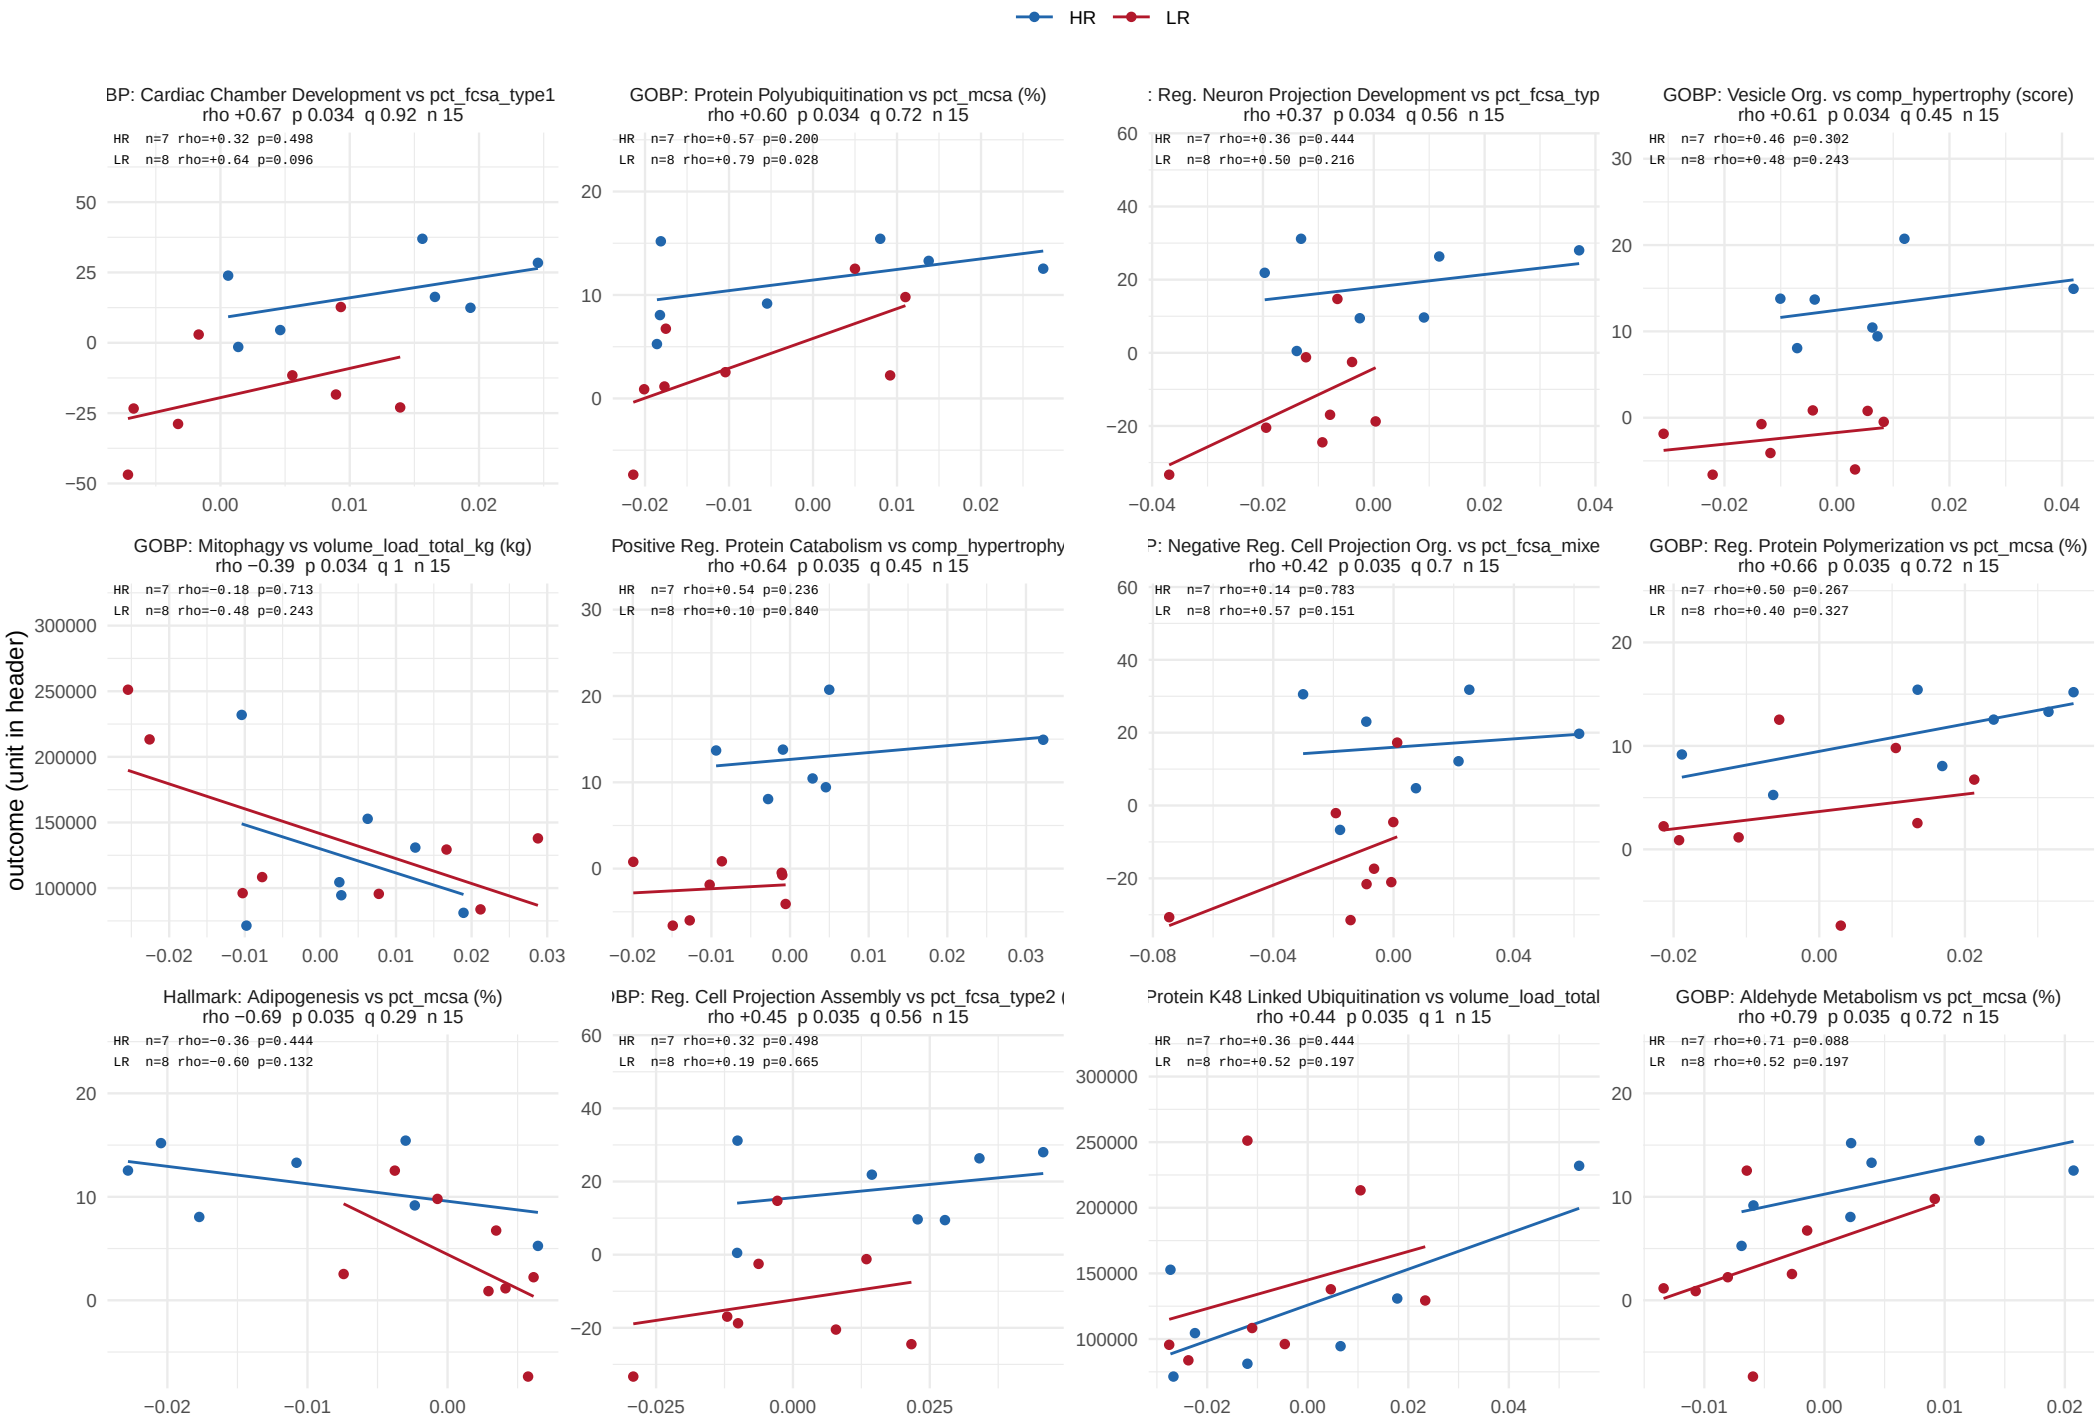

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


494 of 11024 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 29 of 42.

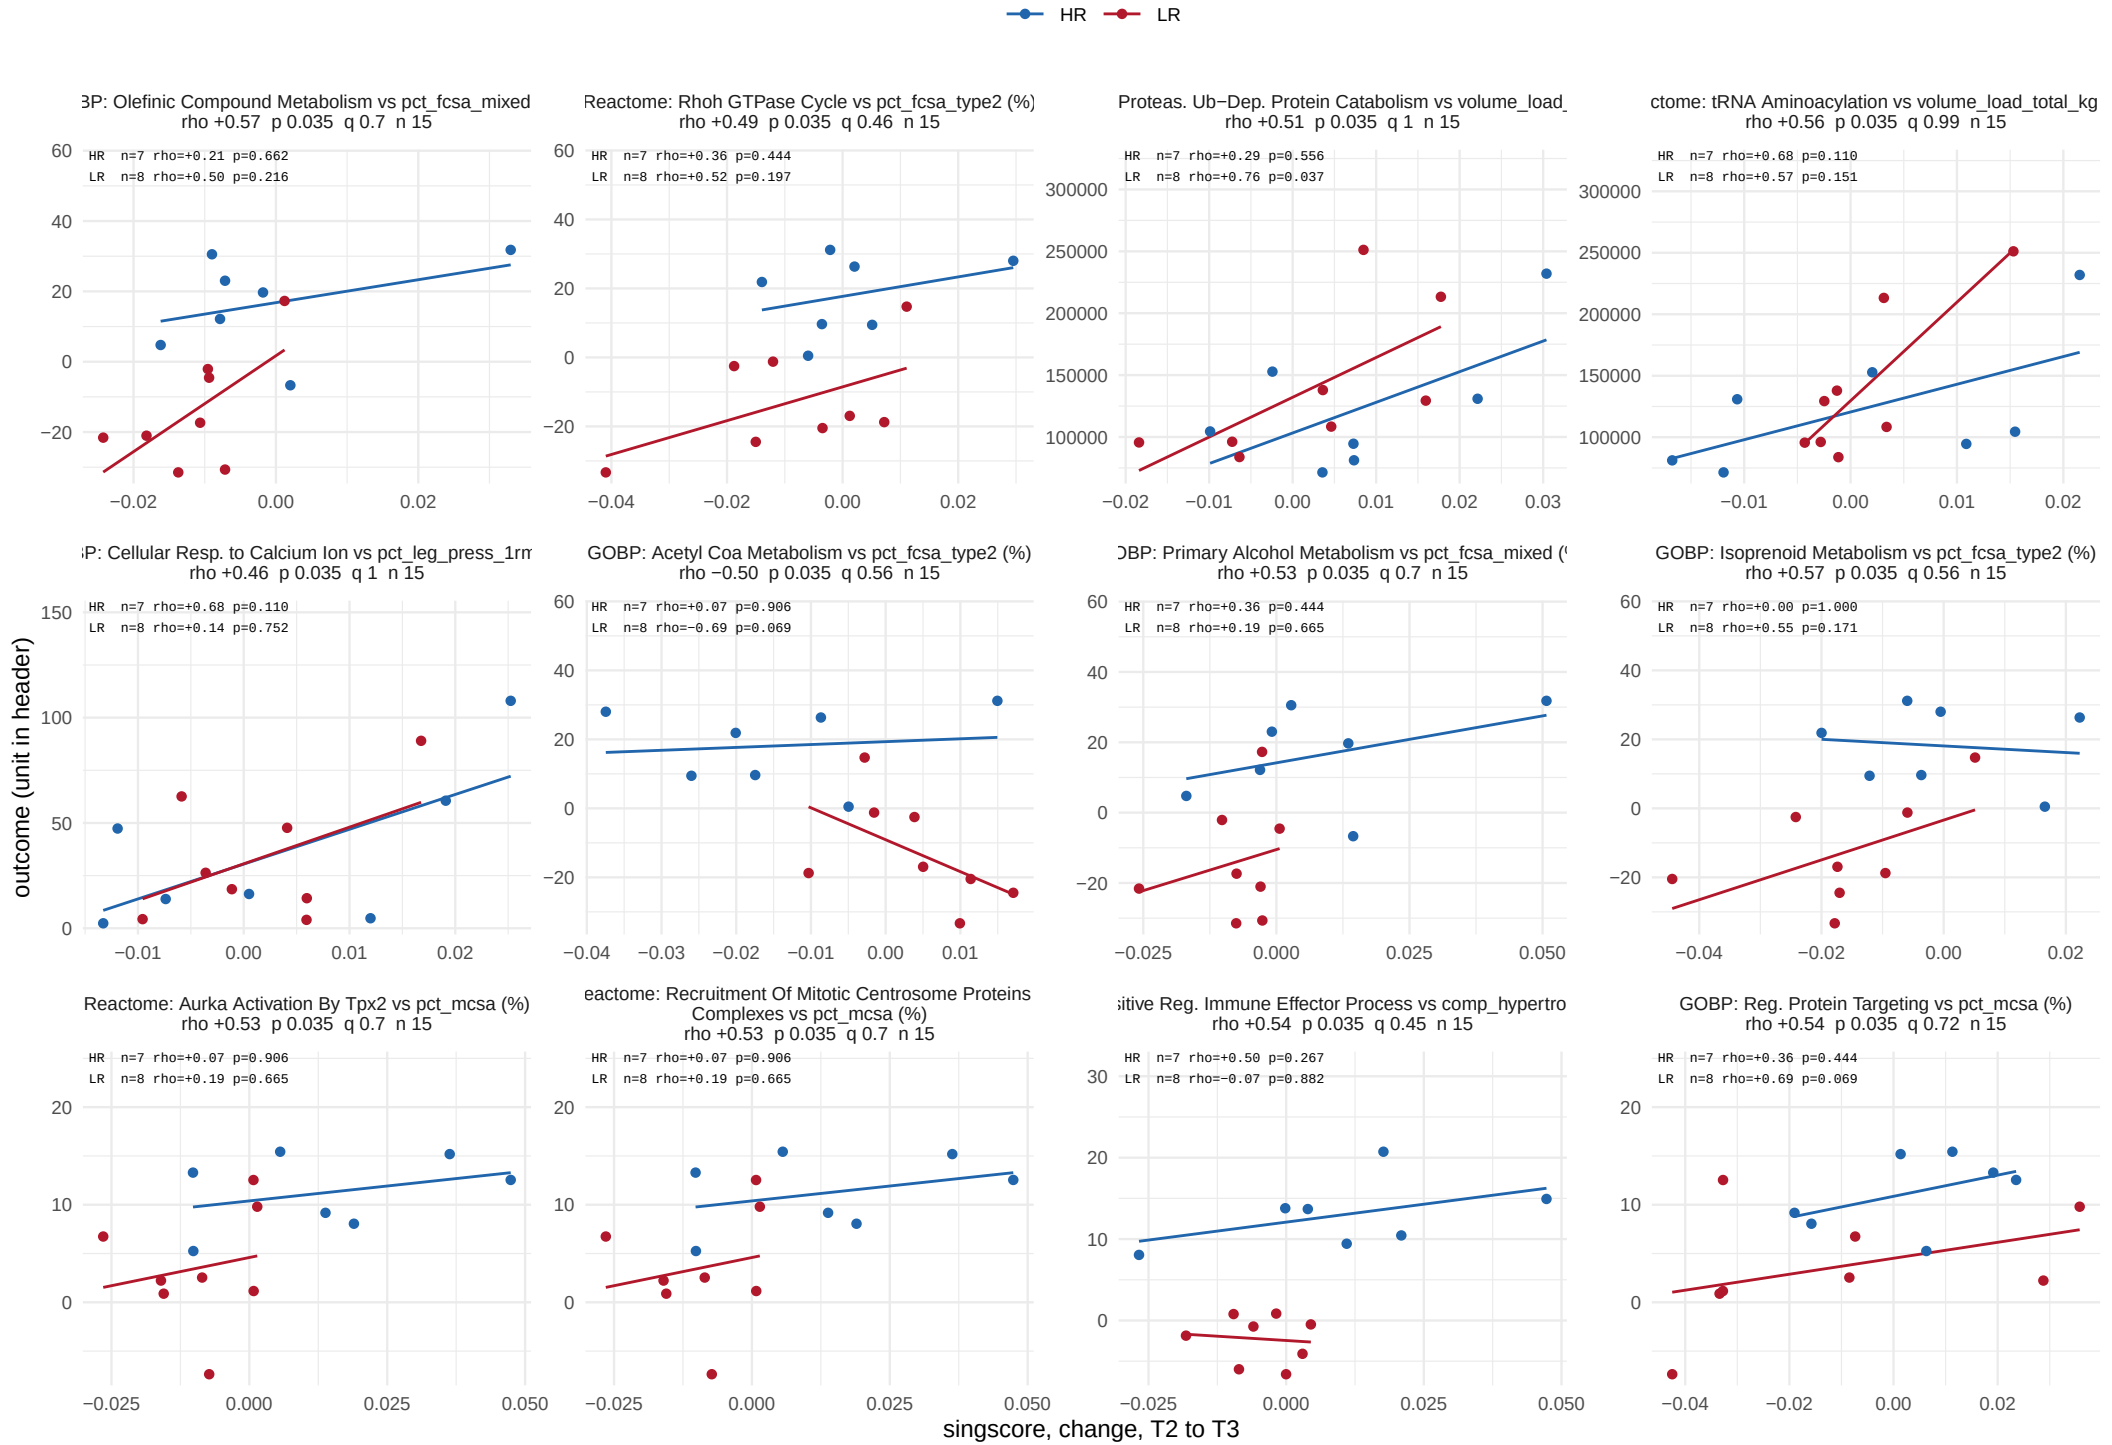

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


494 of 11024 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 30 of 42.

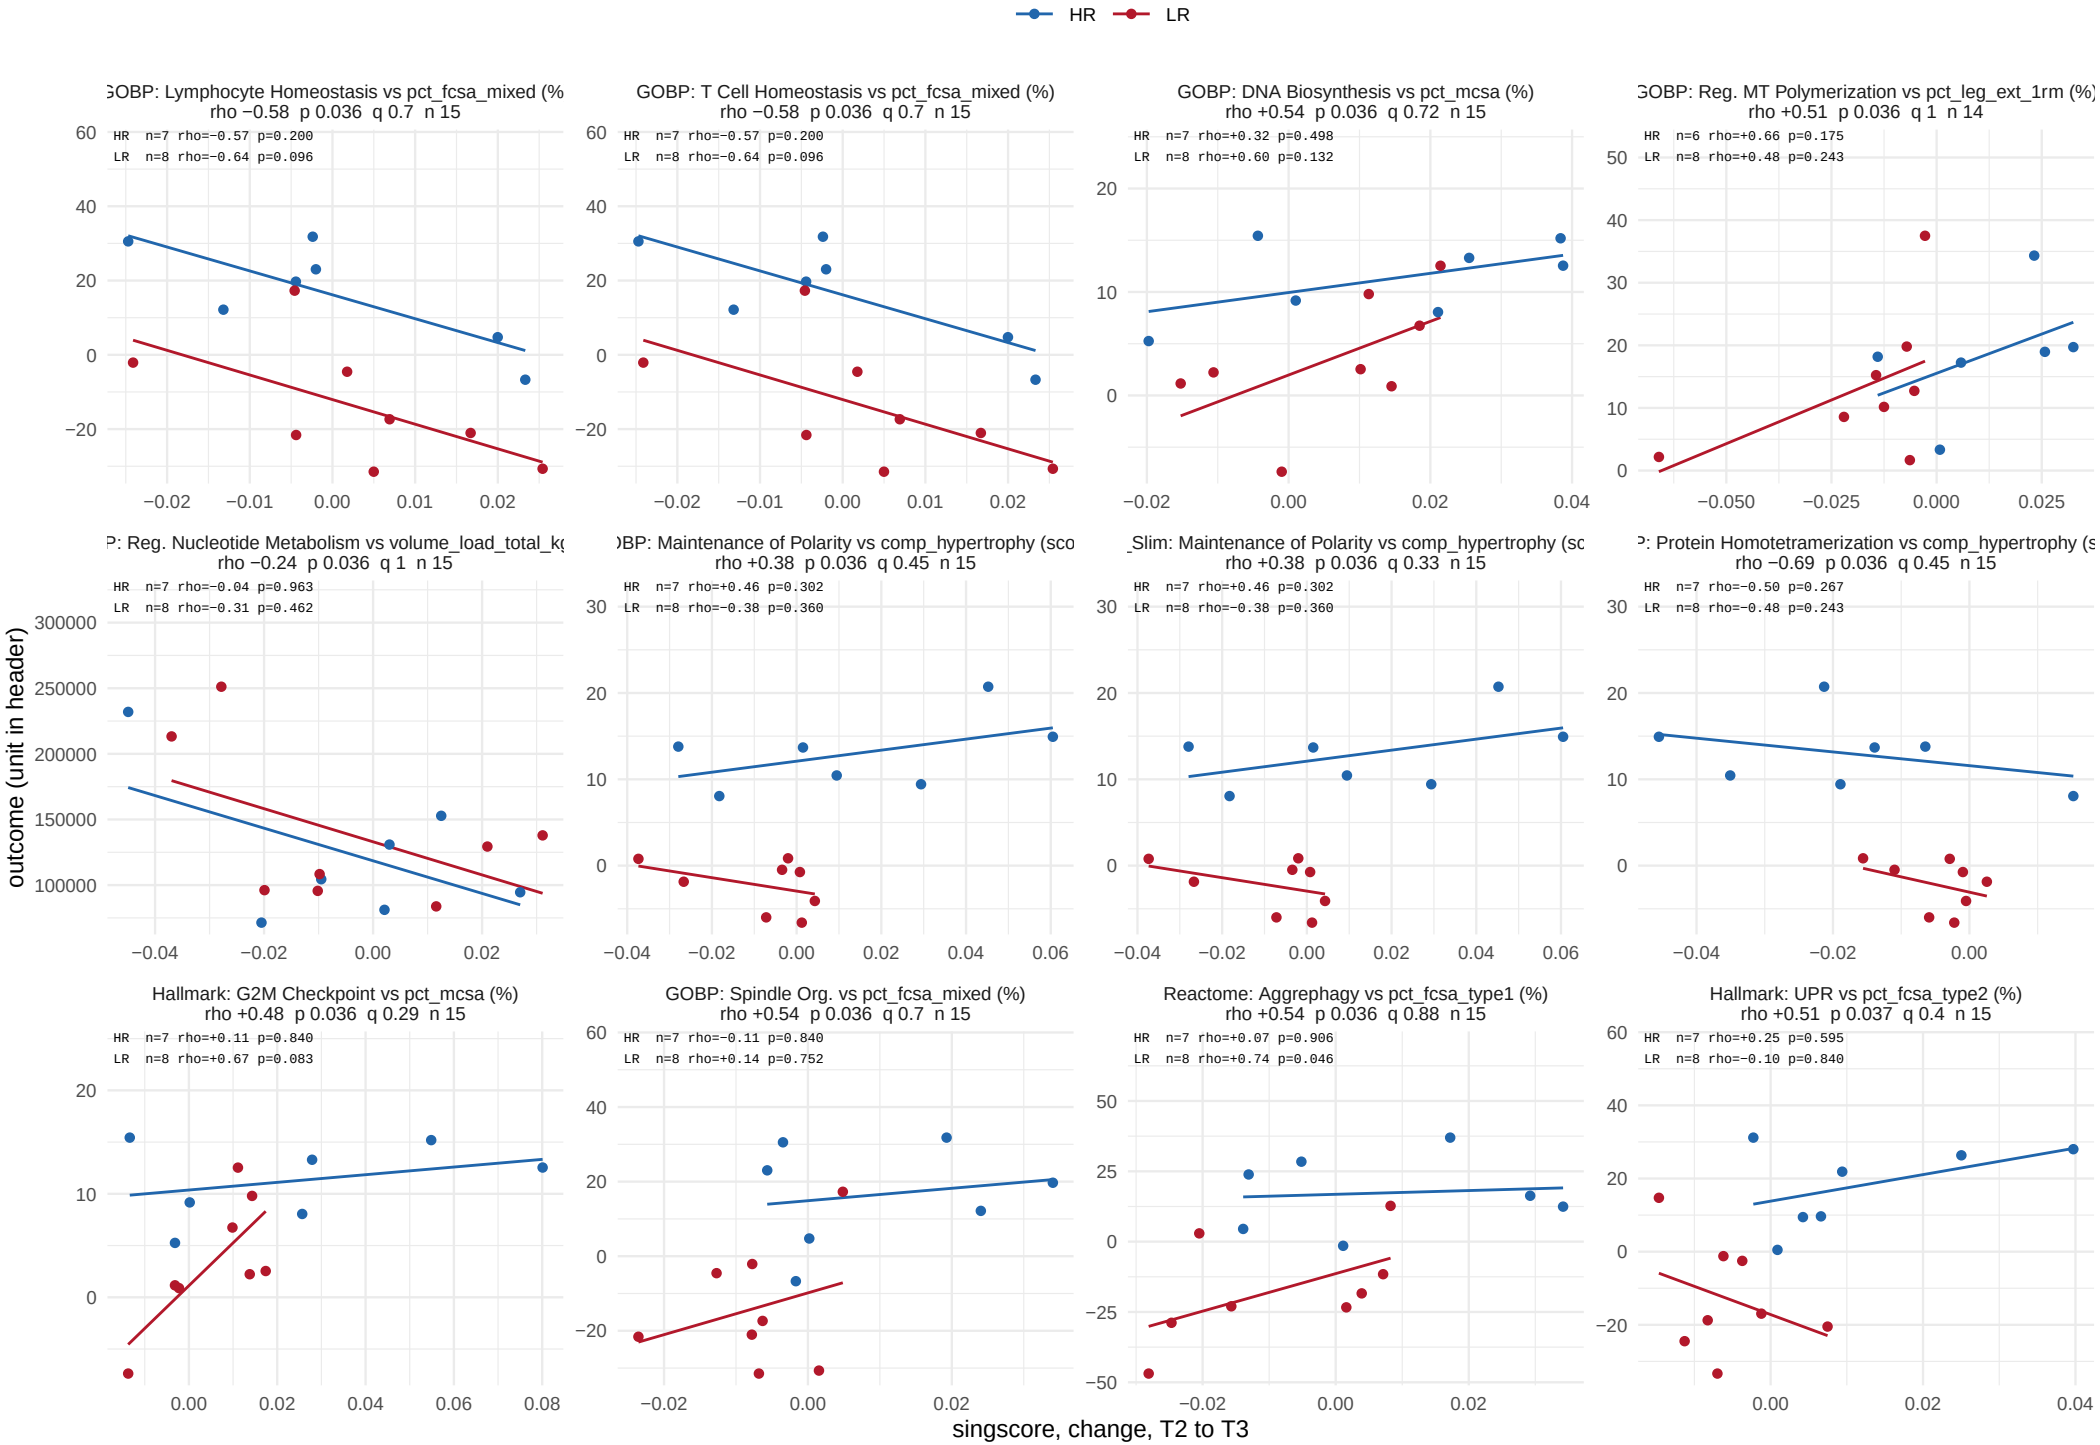

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


494 of 11024 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 31 of 42.

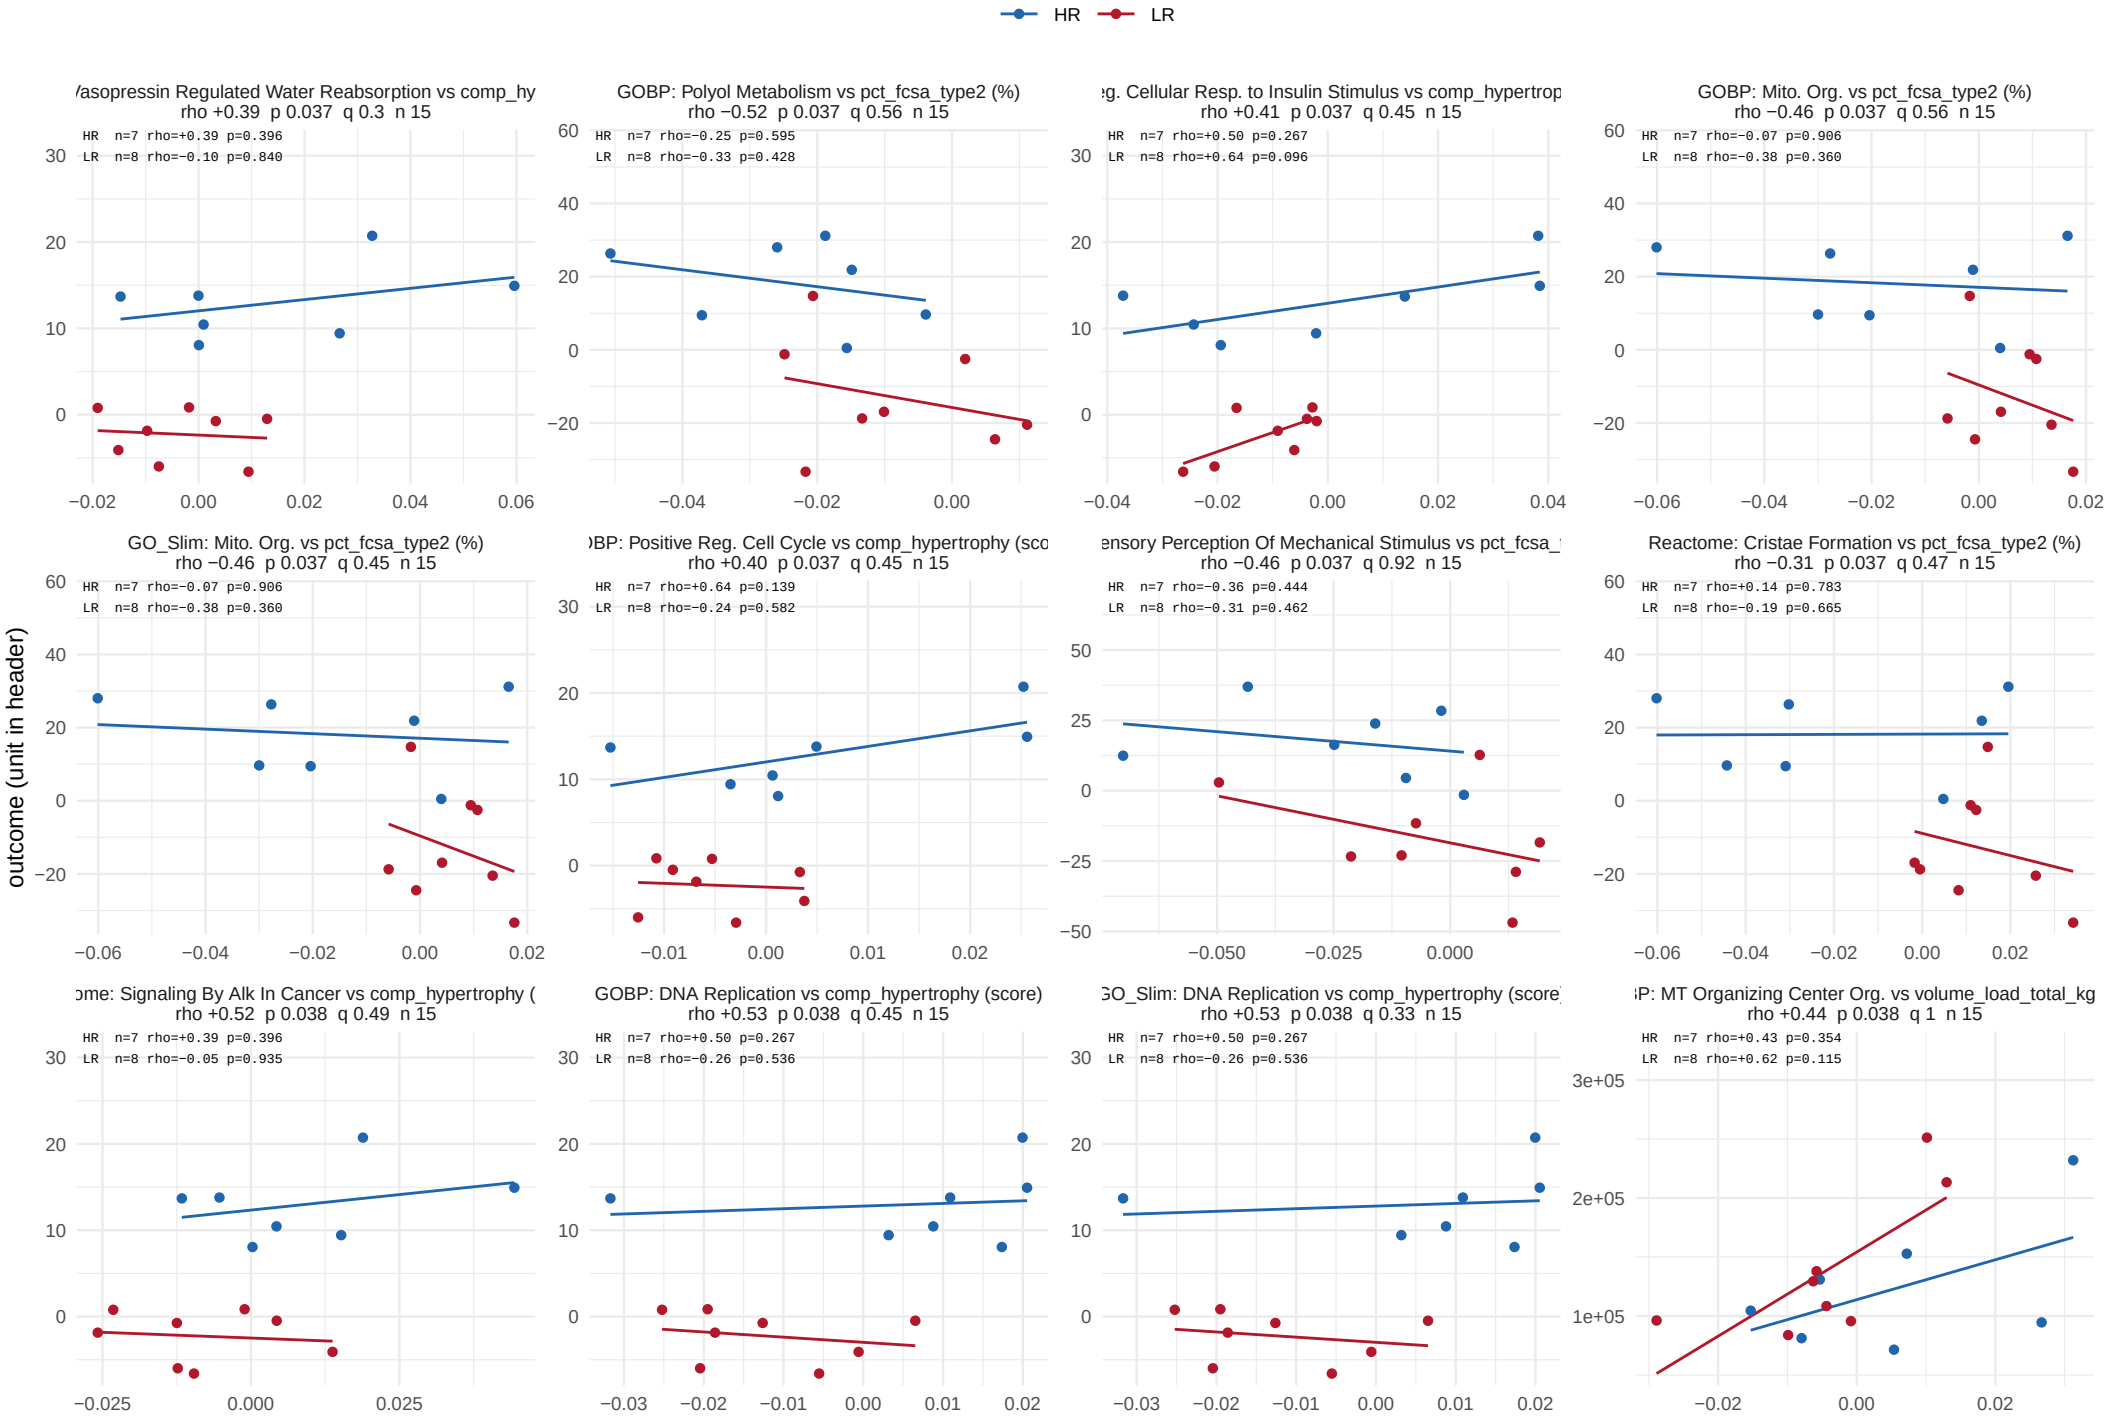

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


494 of 11024 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 32 of 42.

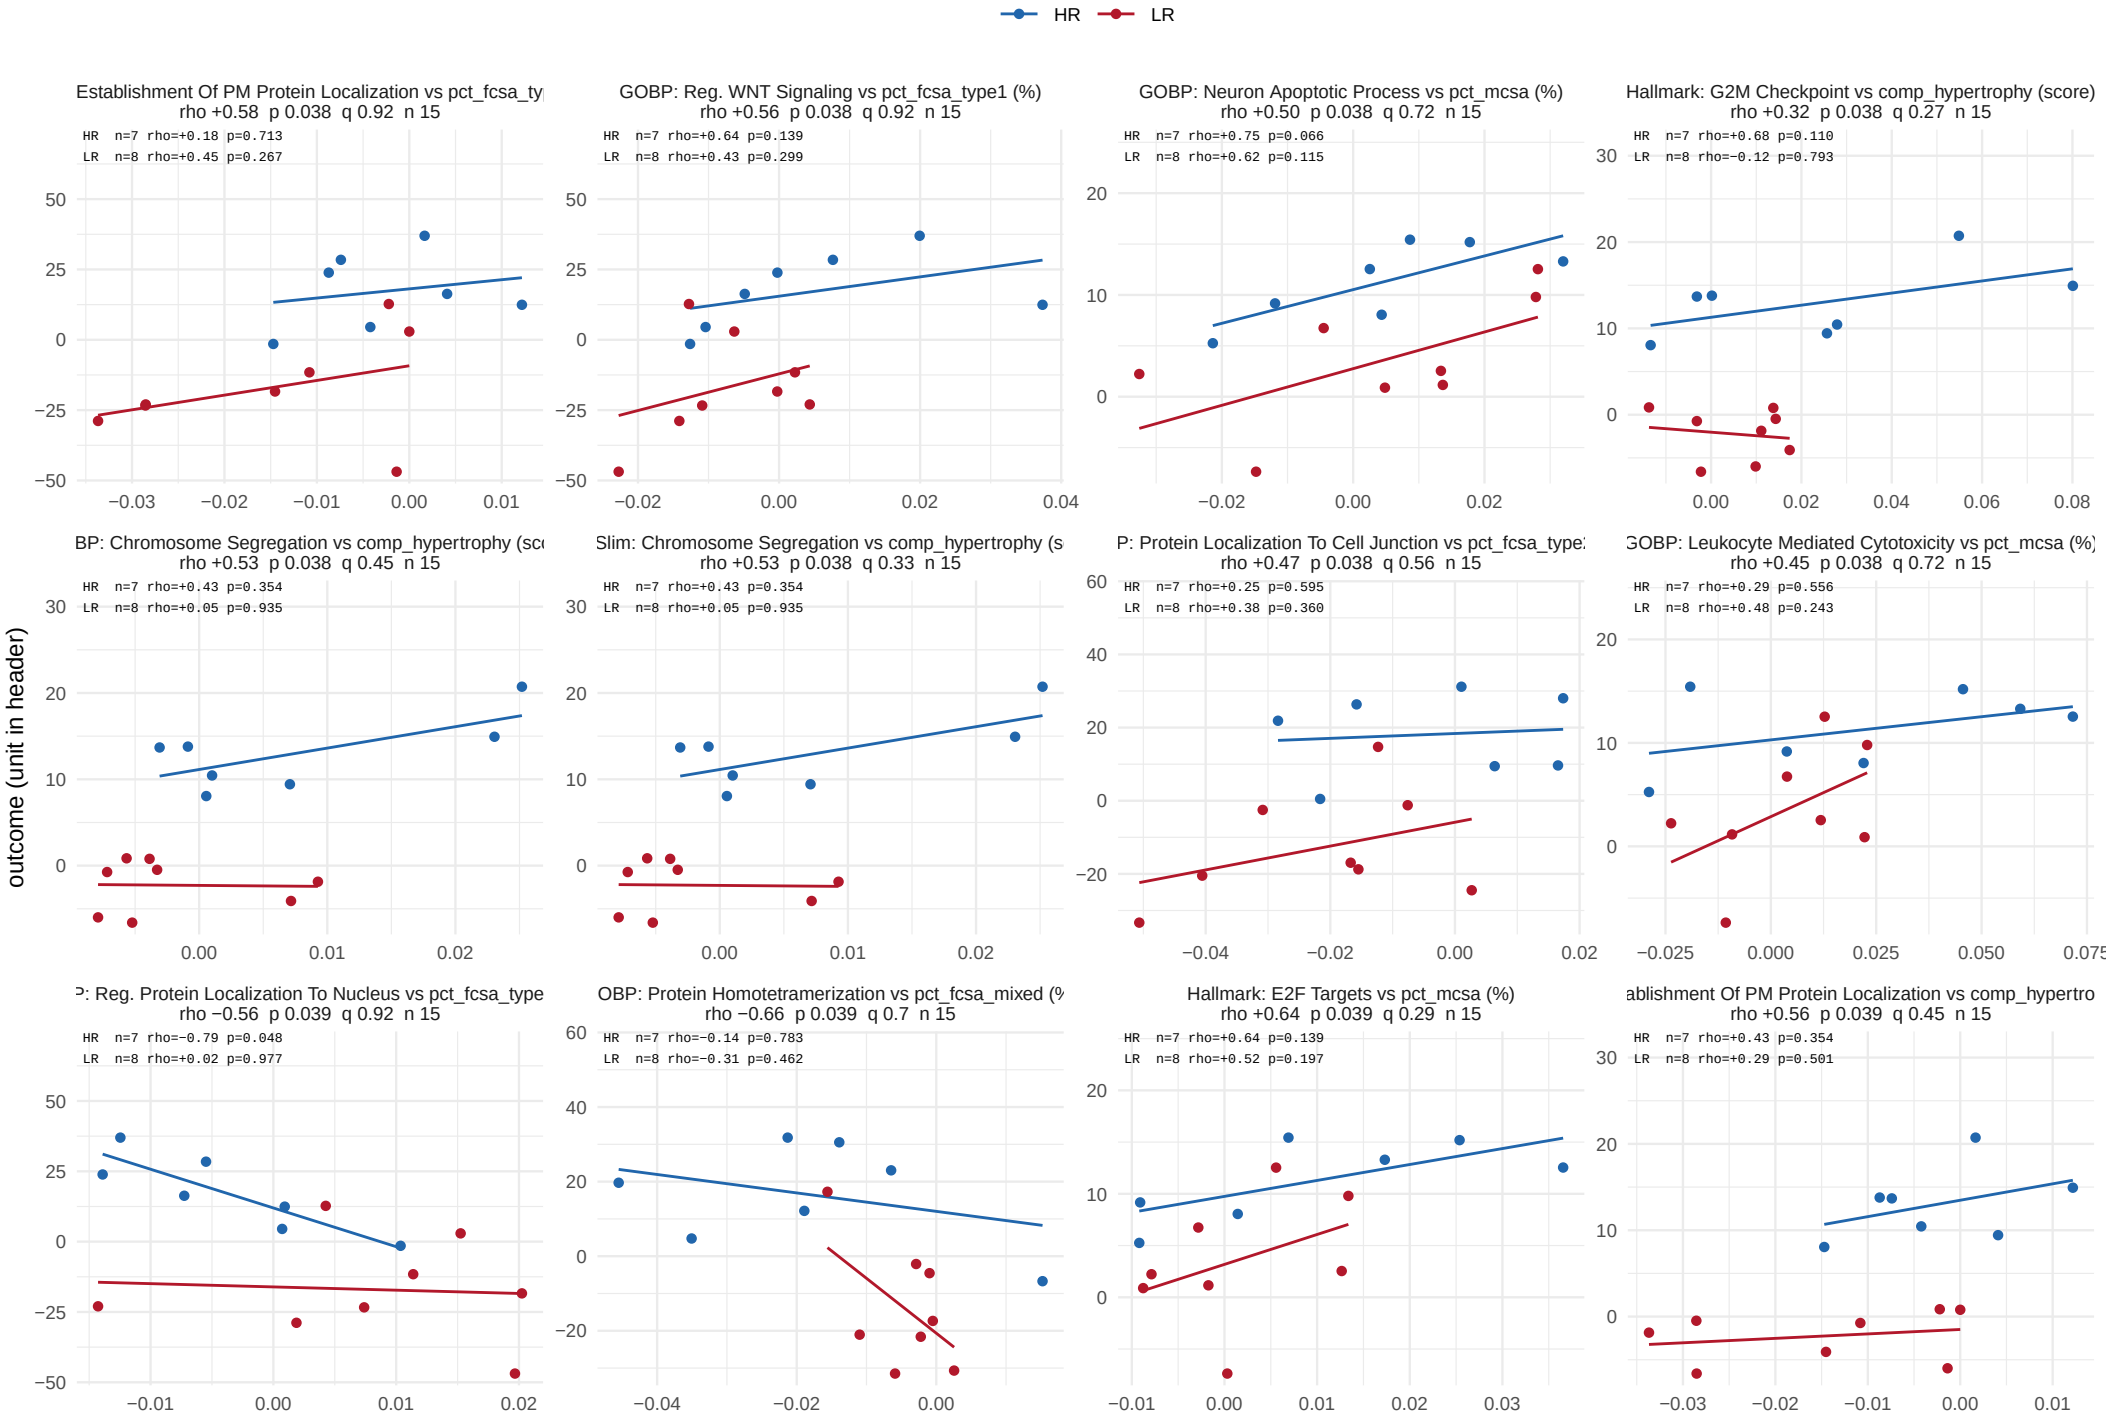

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


494 of 11024 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 33 of 42.

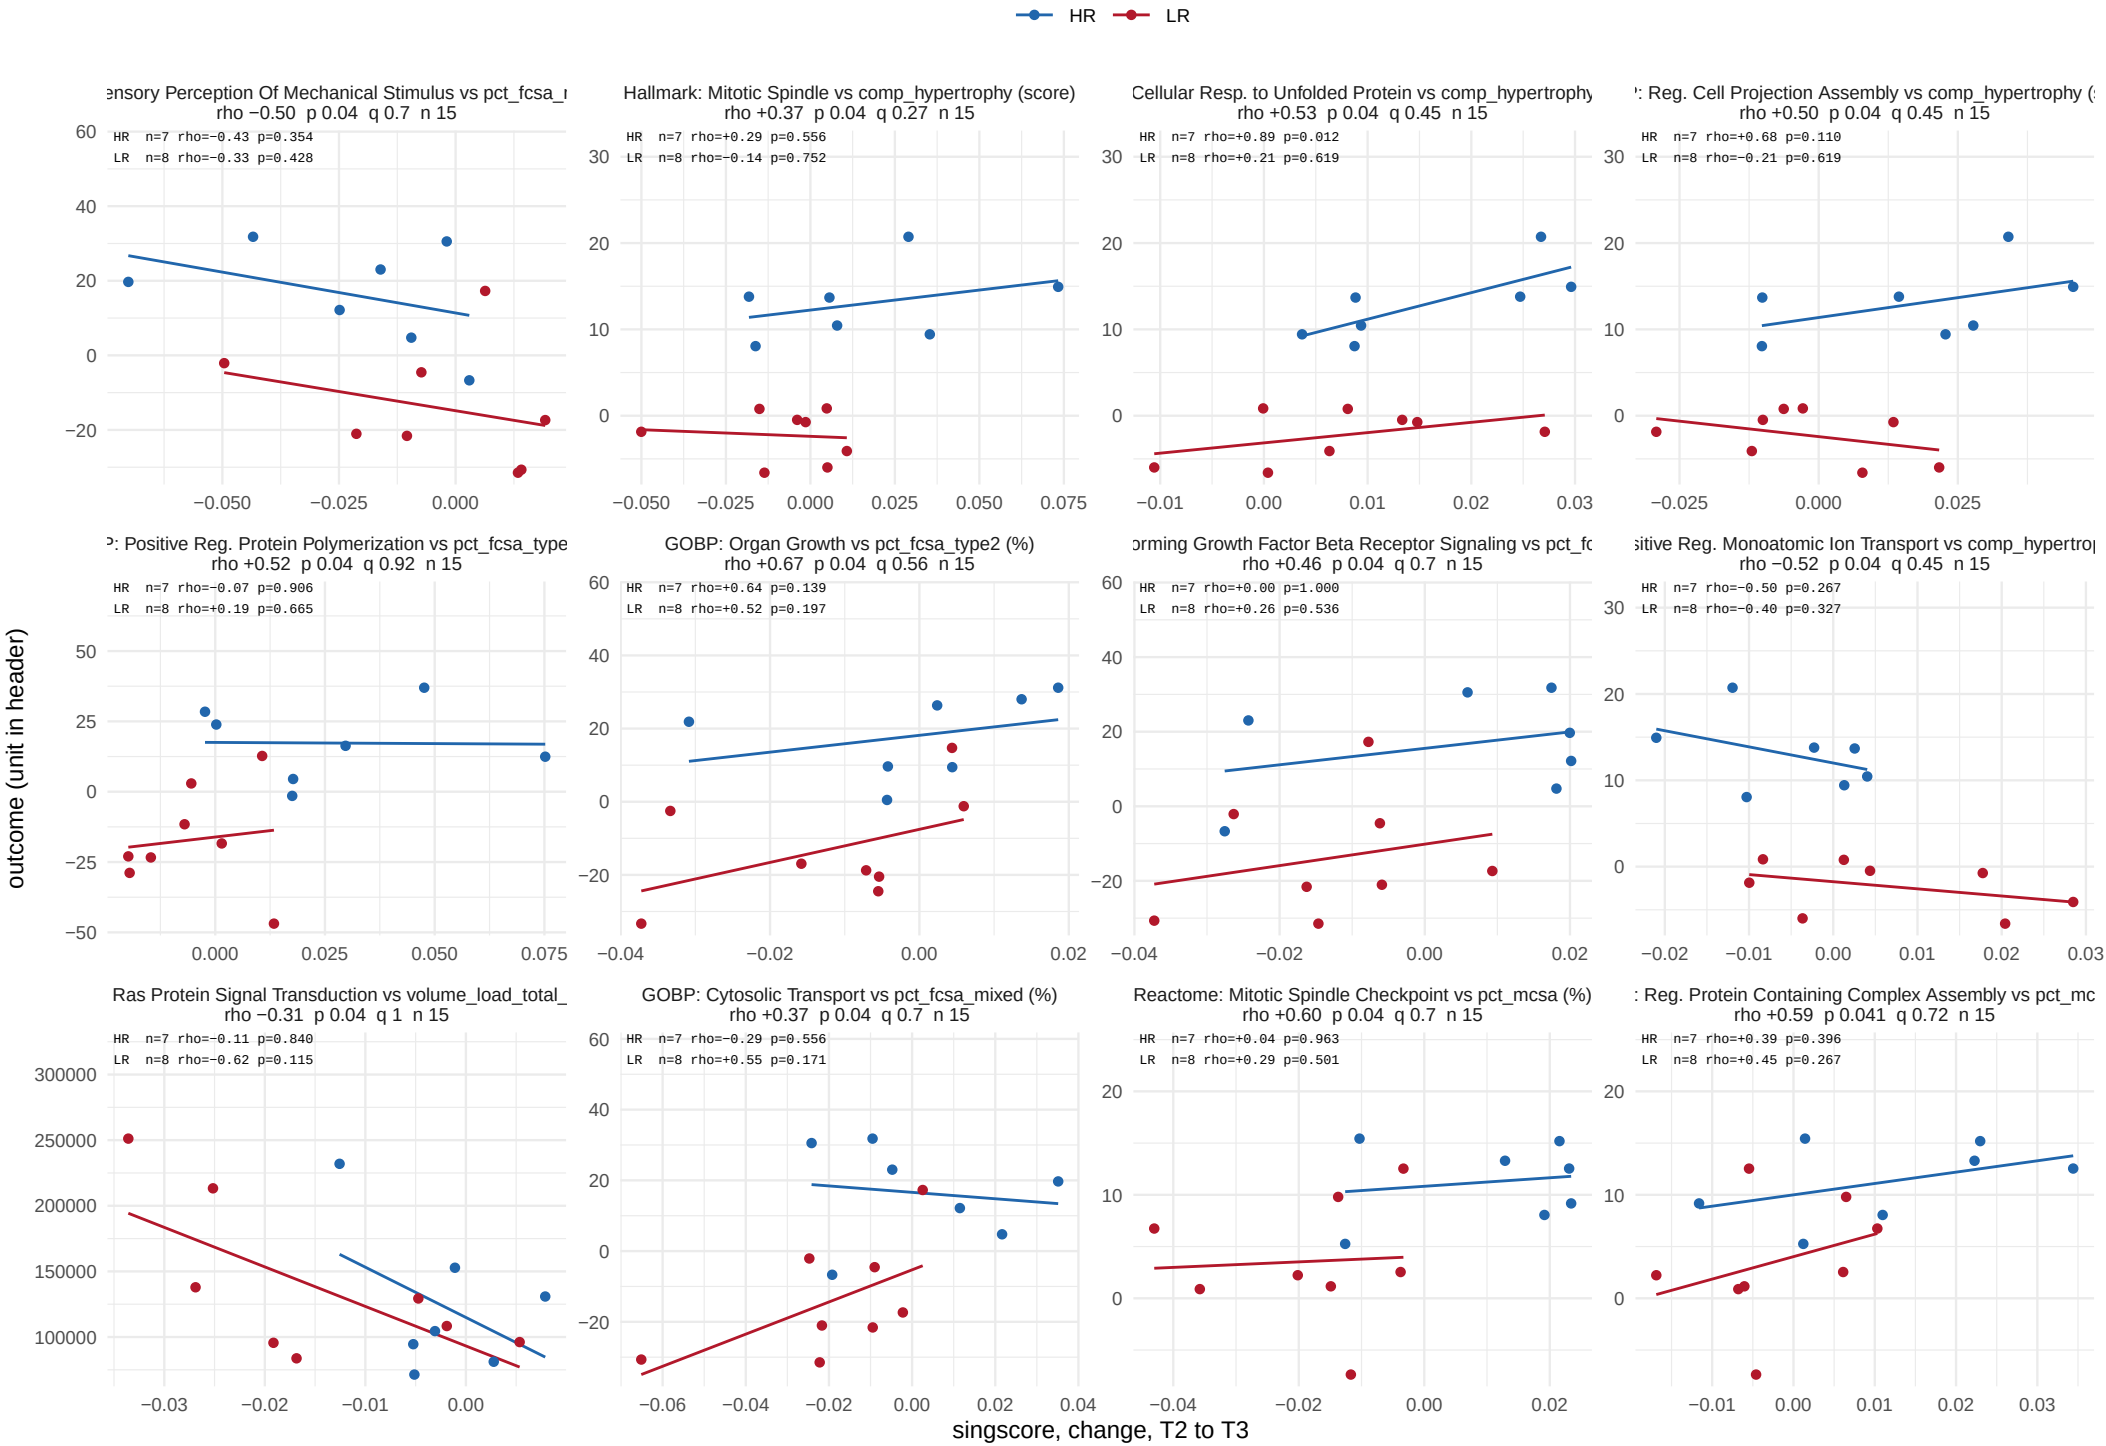

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


494 of 11024 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 34 of 42.

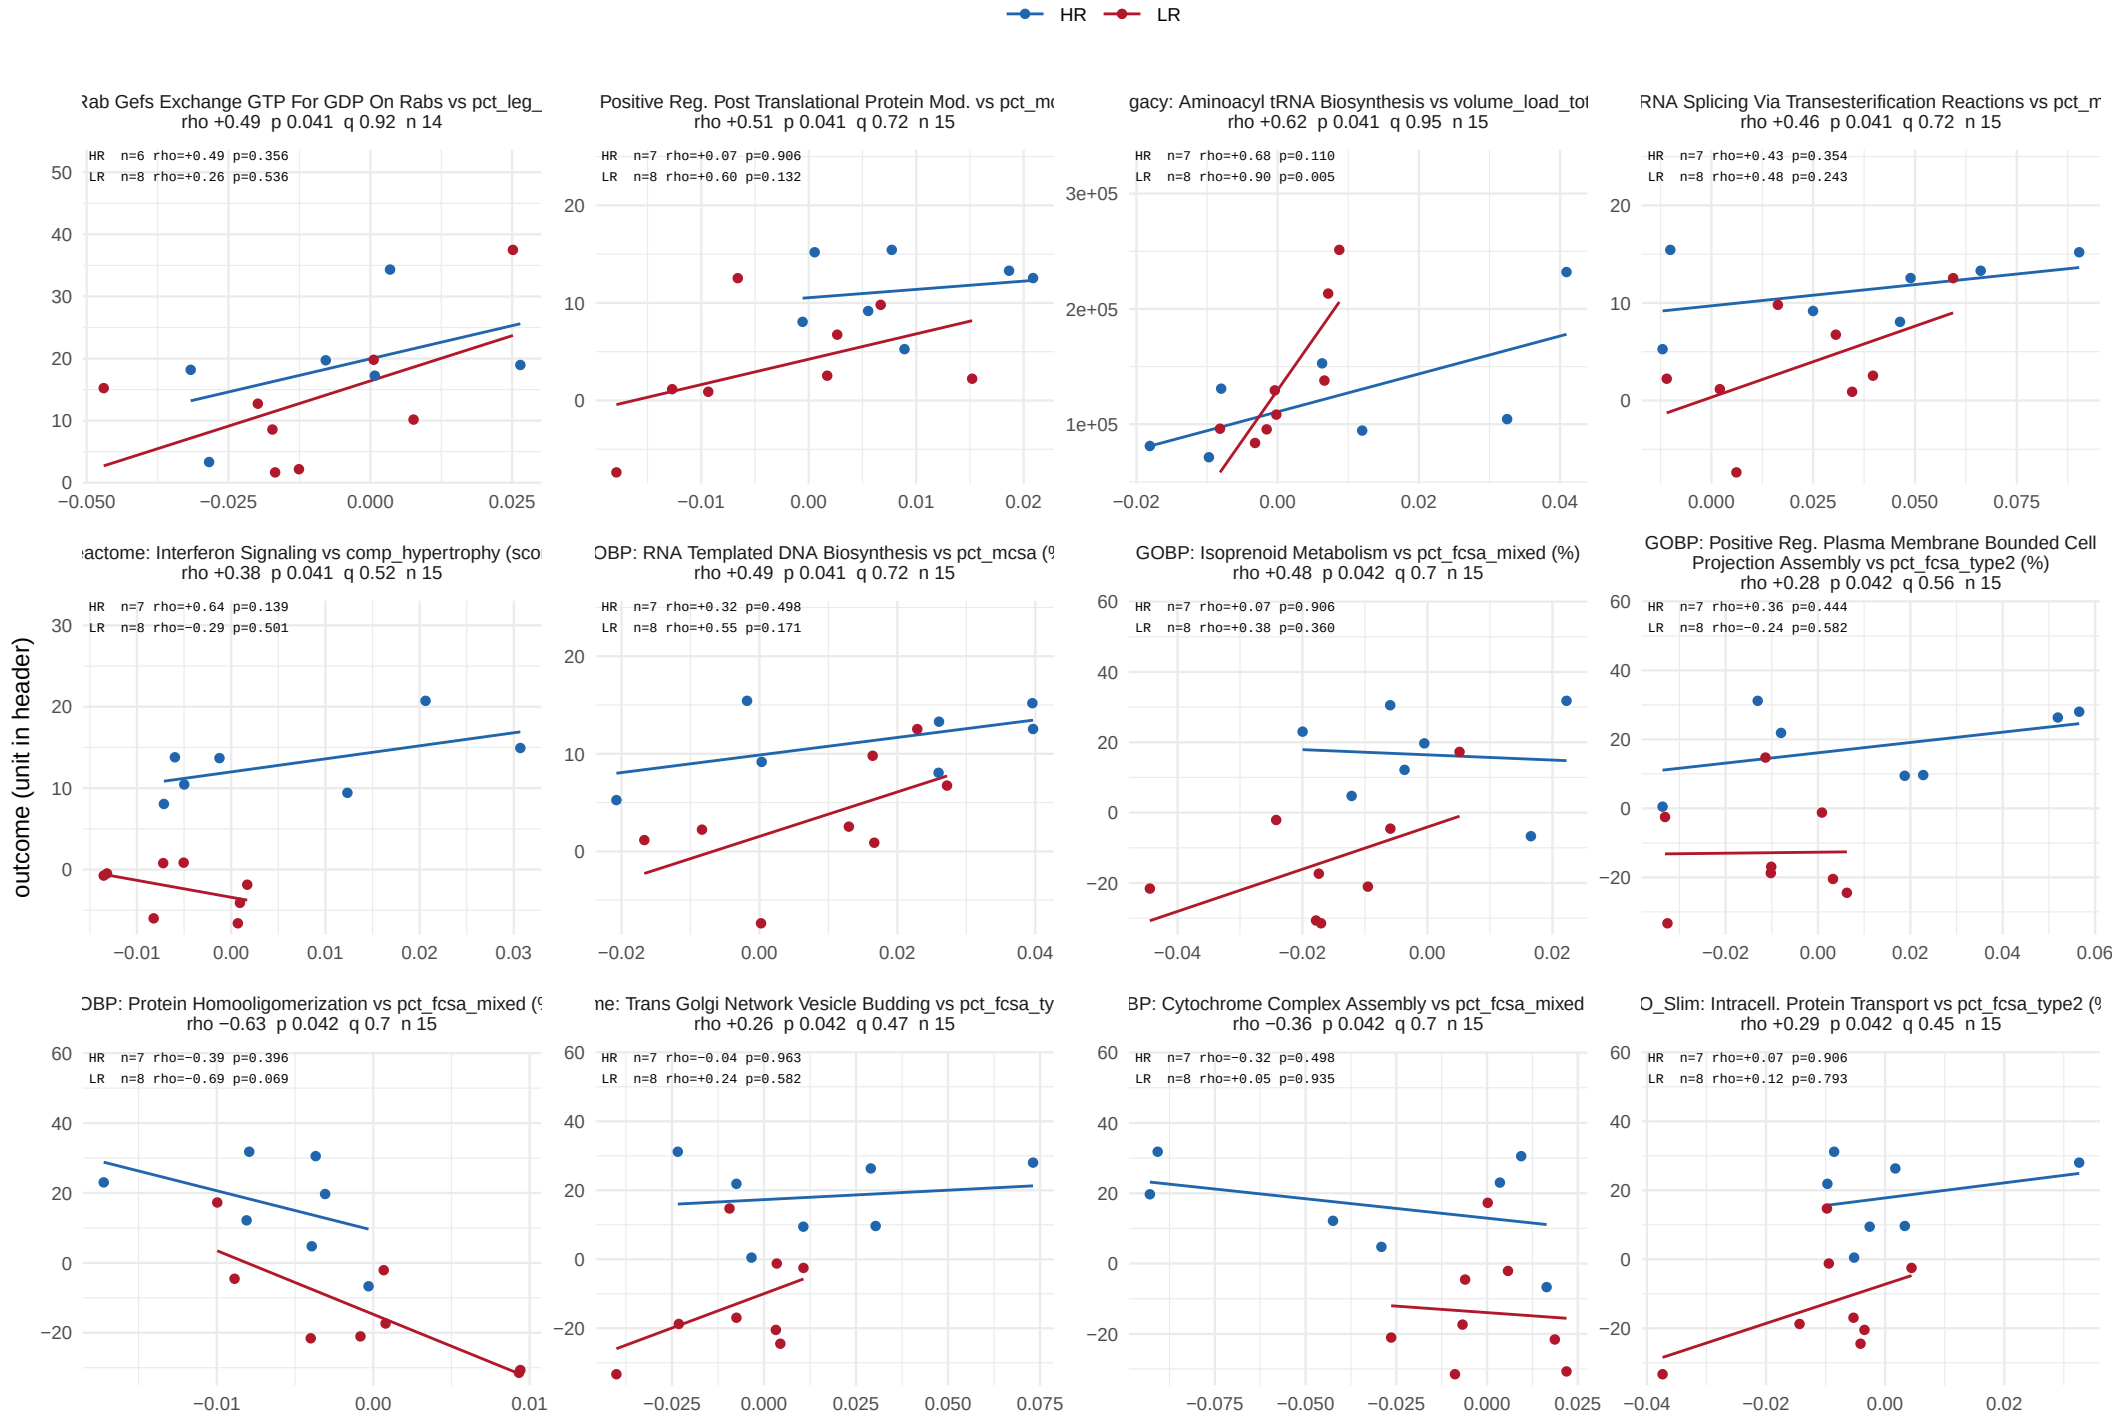

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


494 of 11024 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 35 of 42.

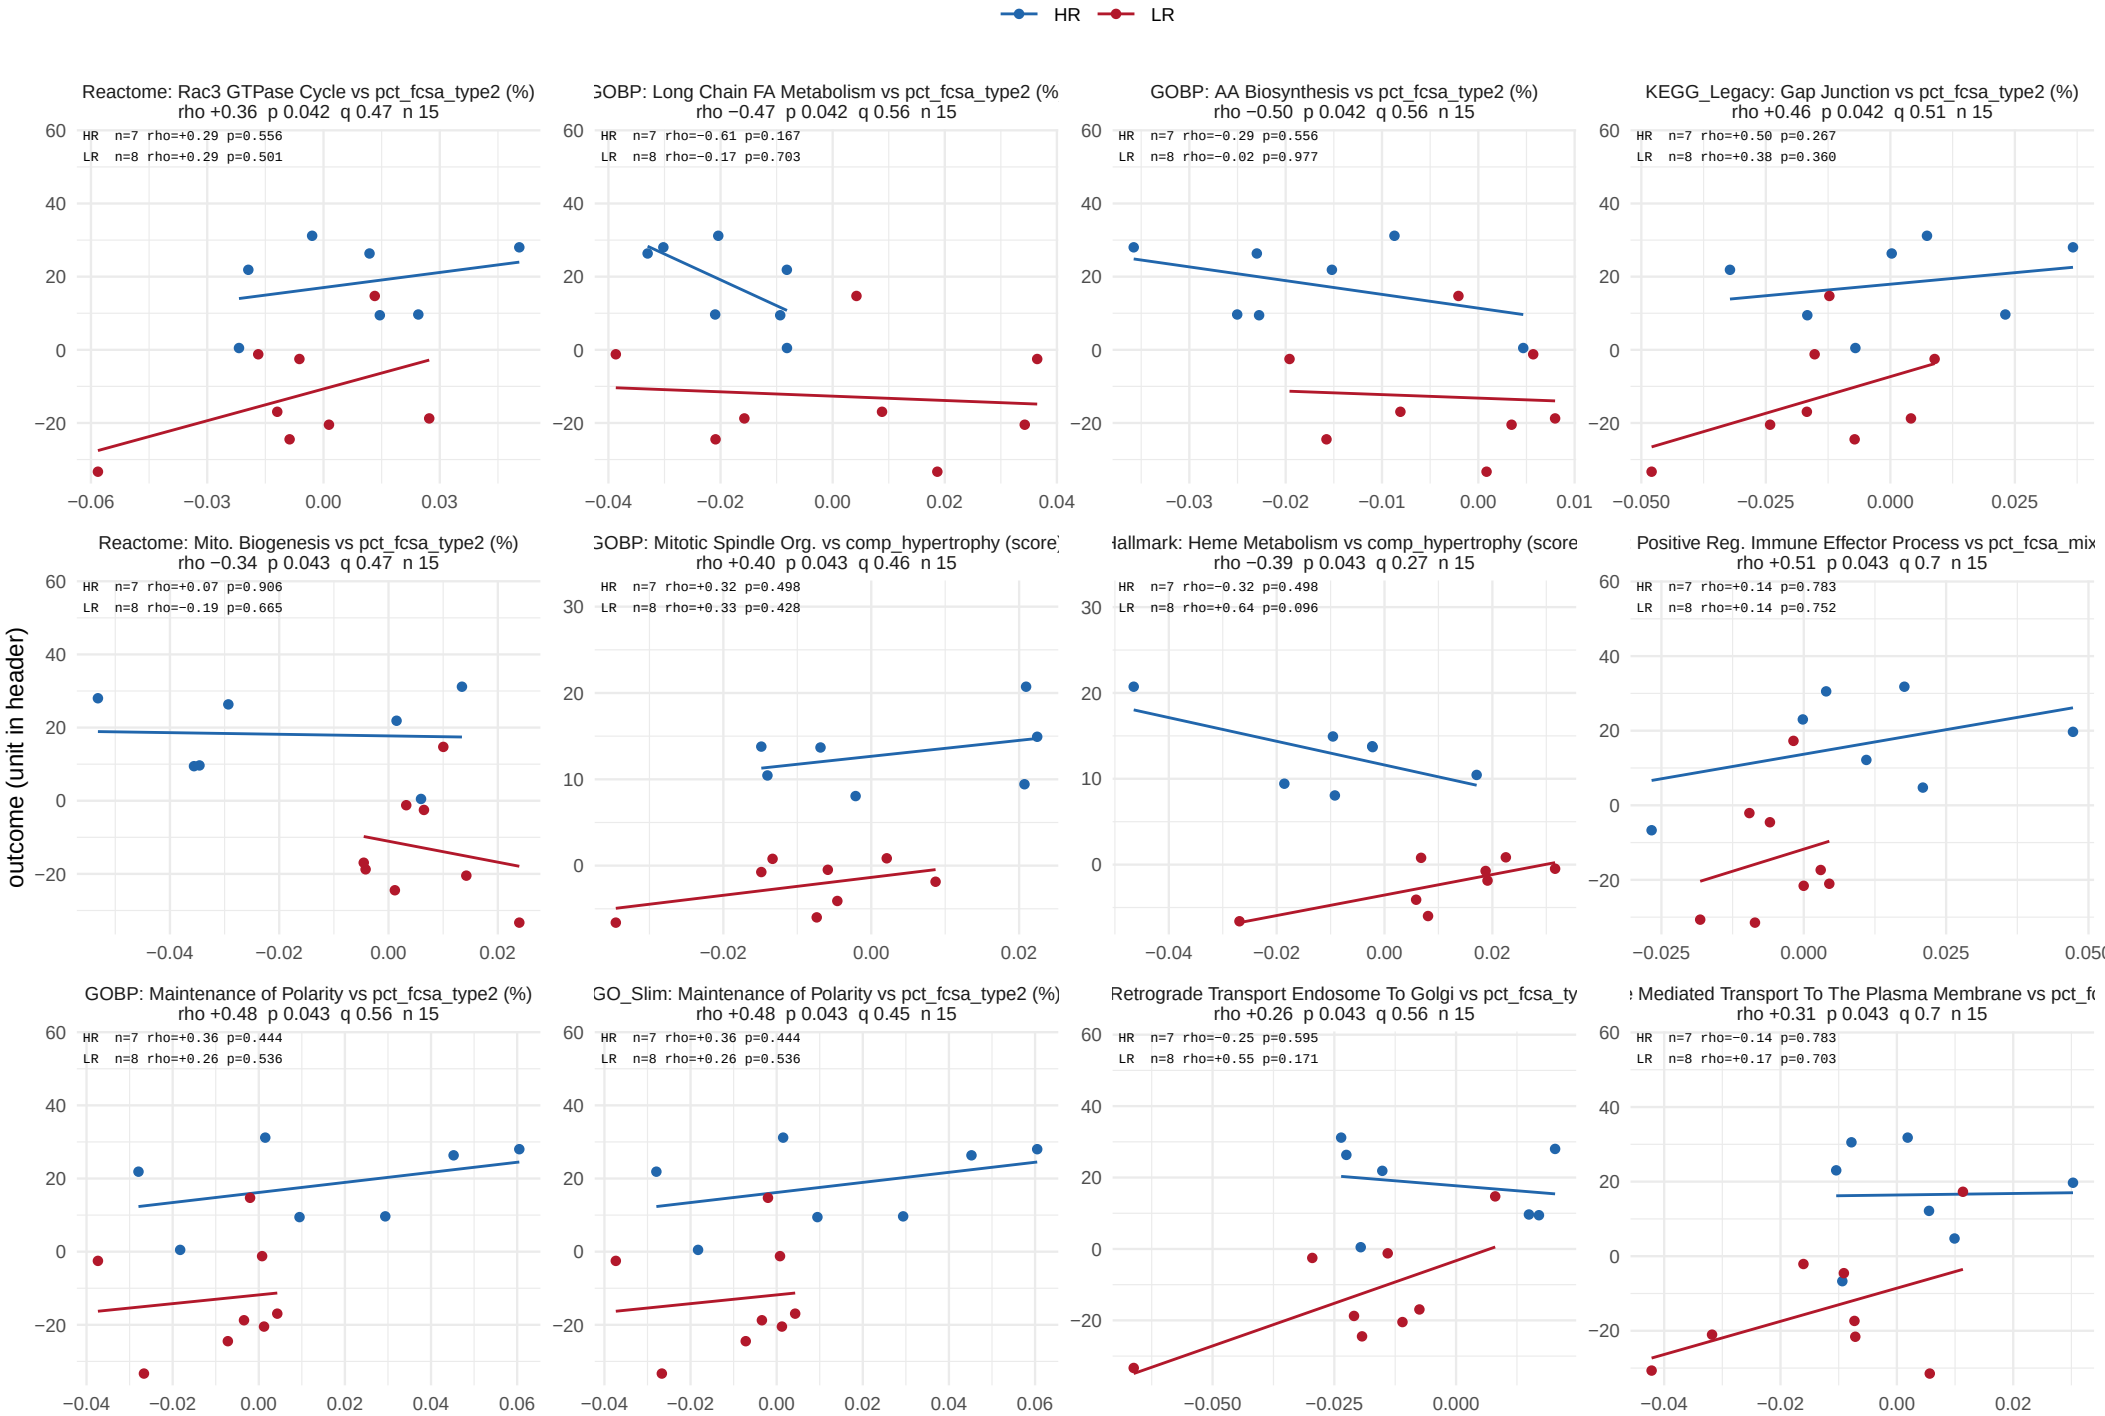

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


494 of 11024 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 36 of 42.

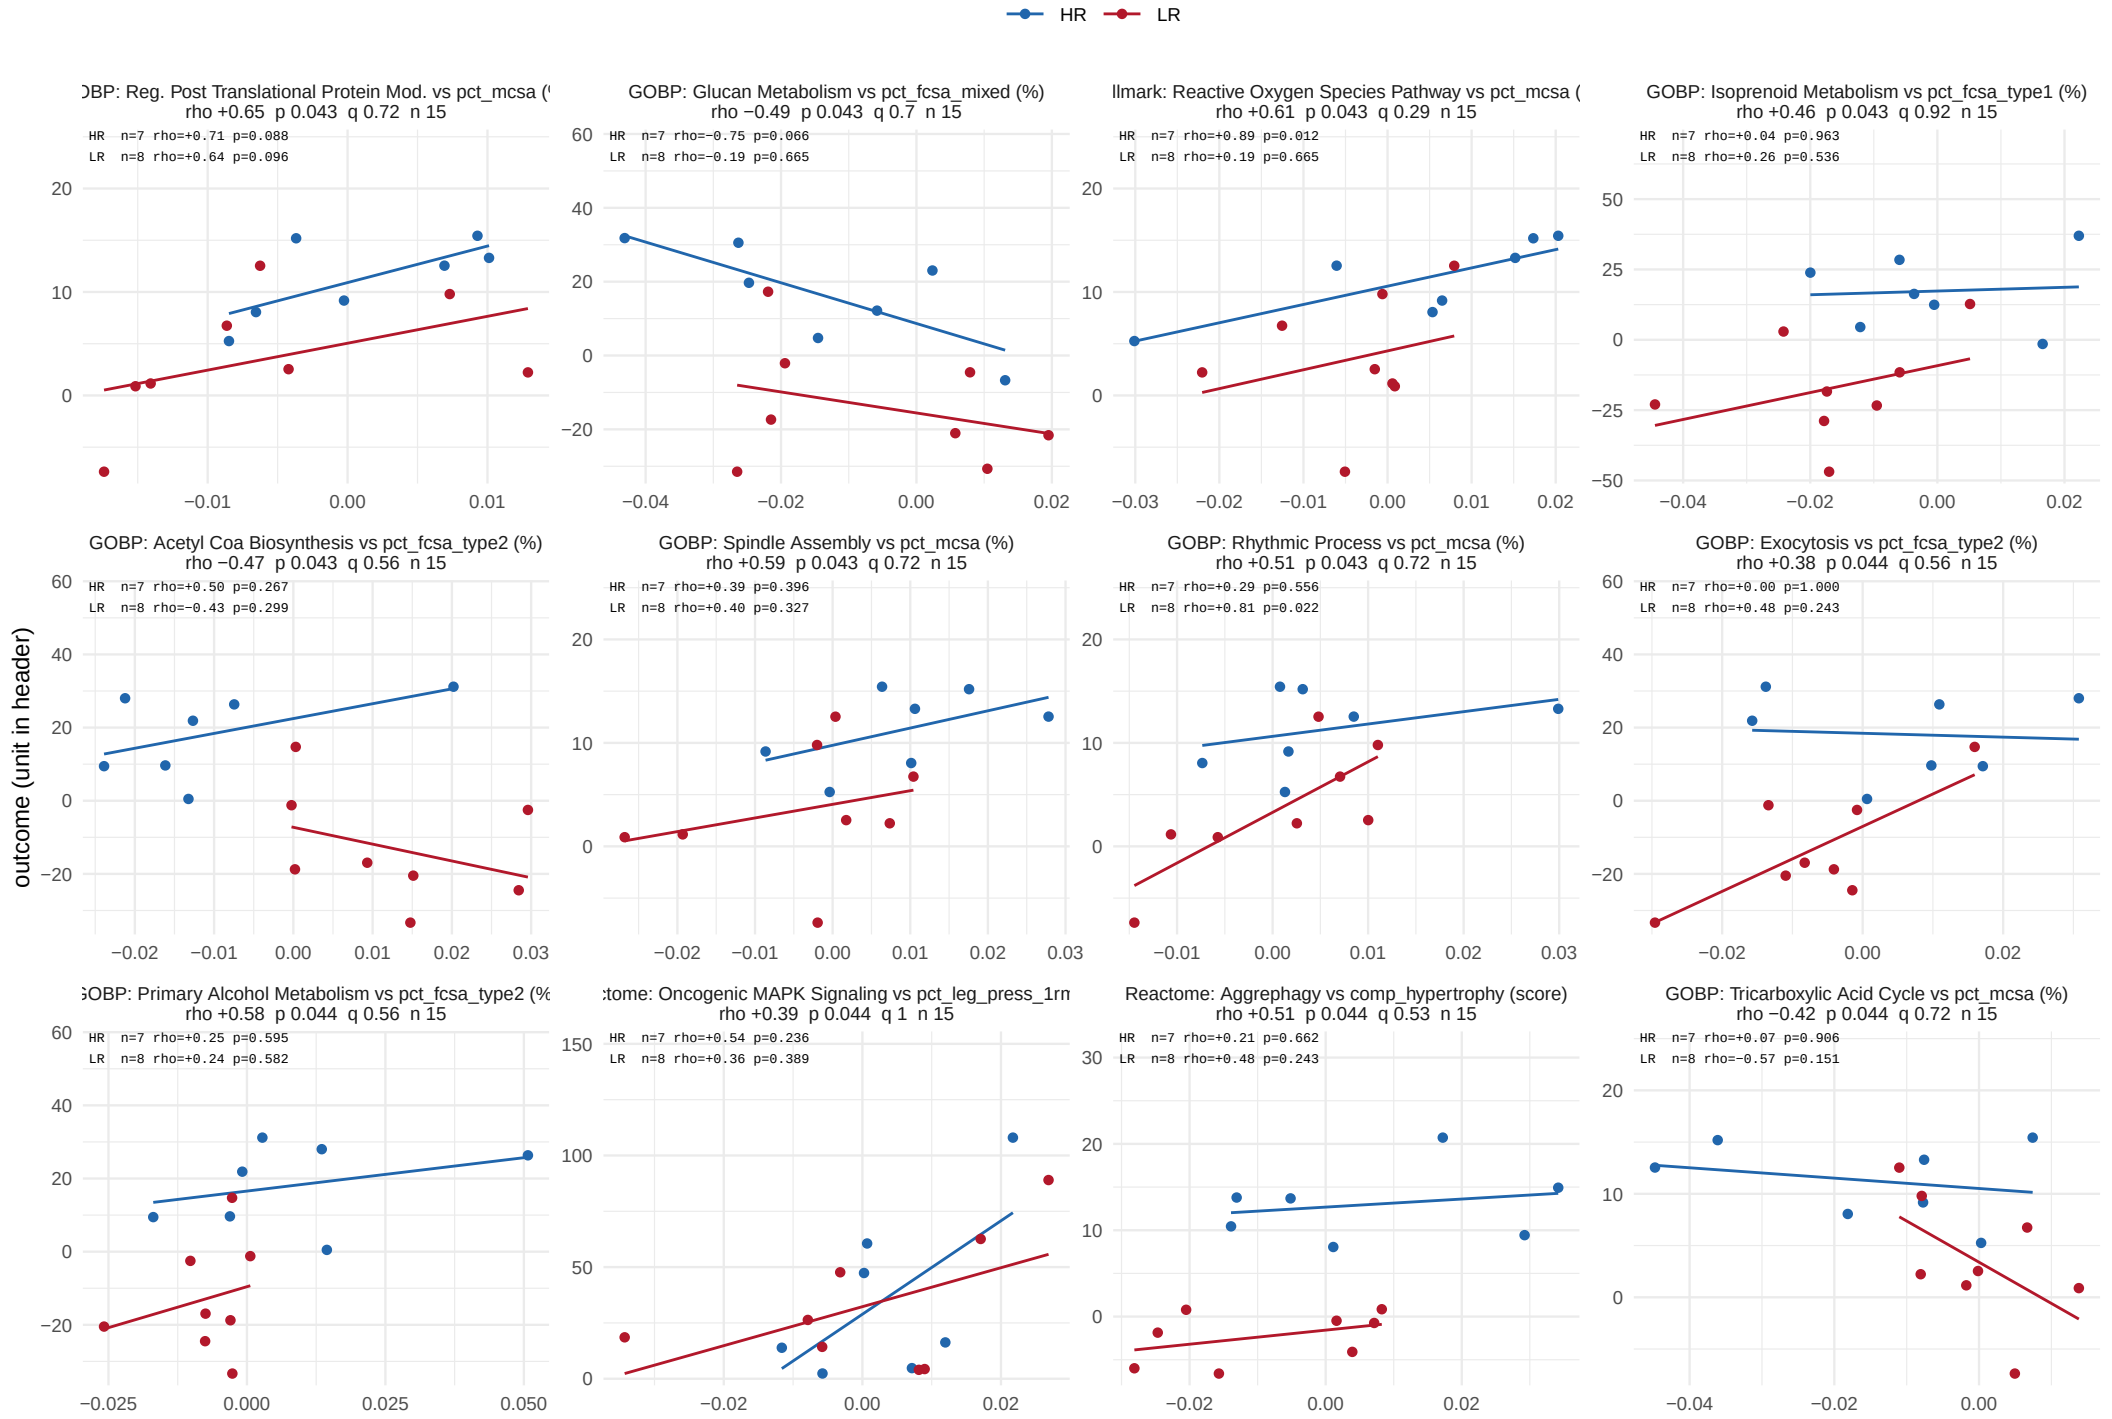

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


494 of 11024 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 37 of 42.

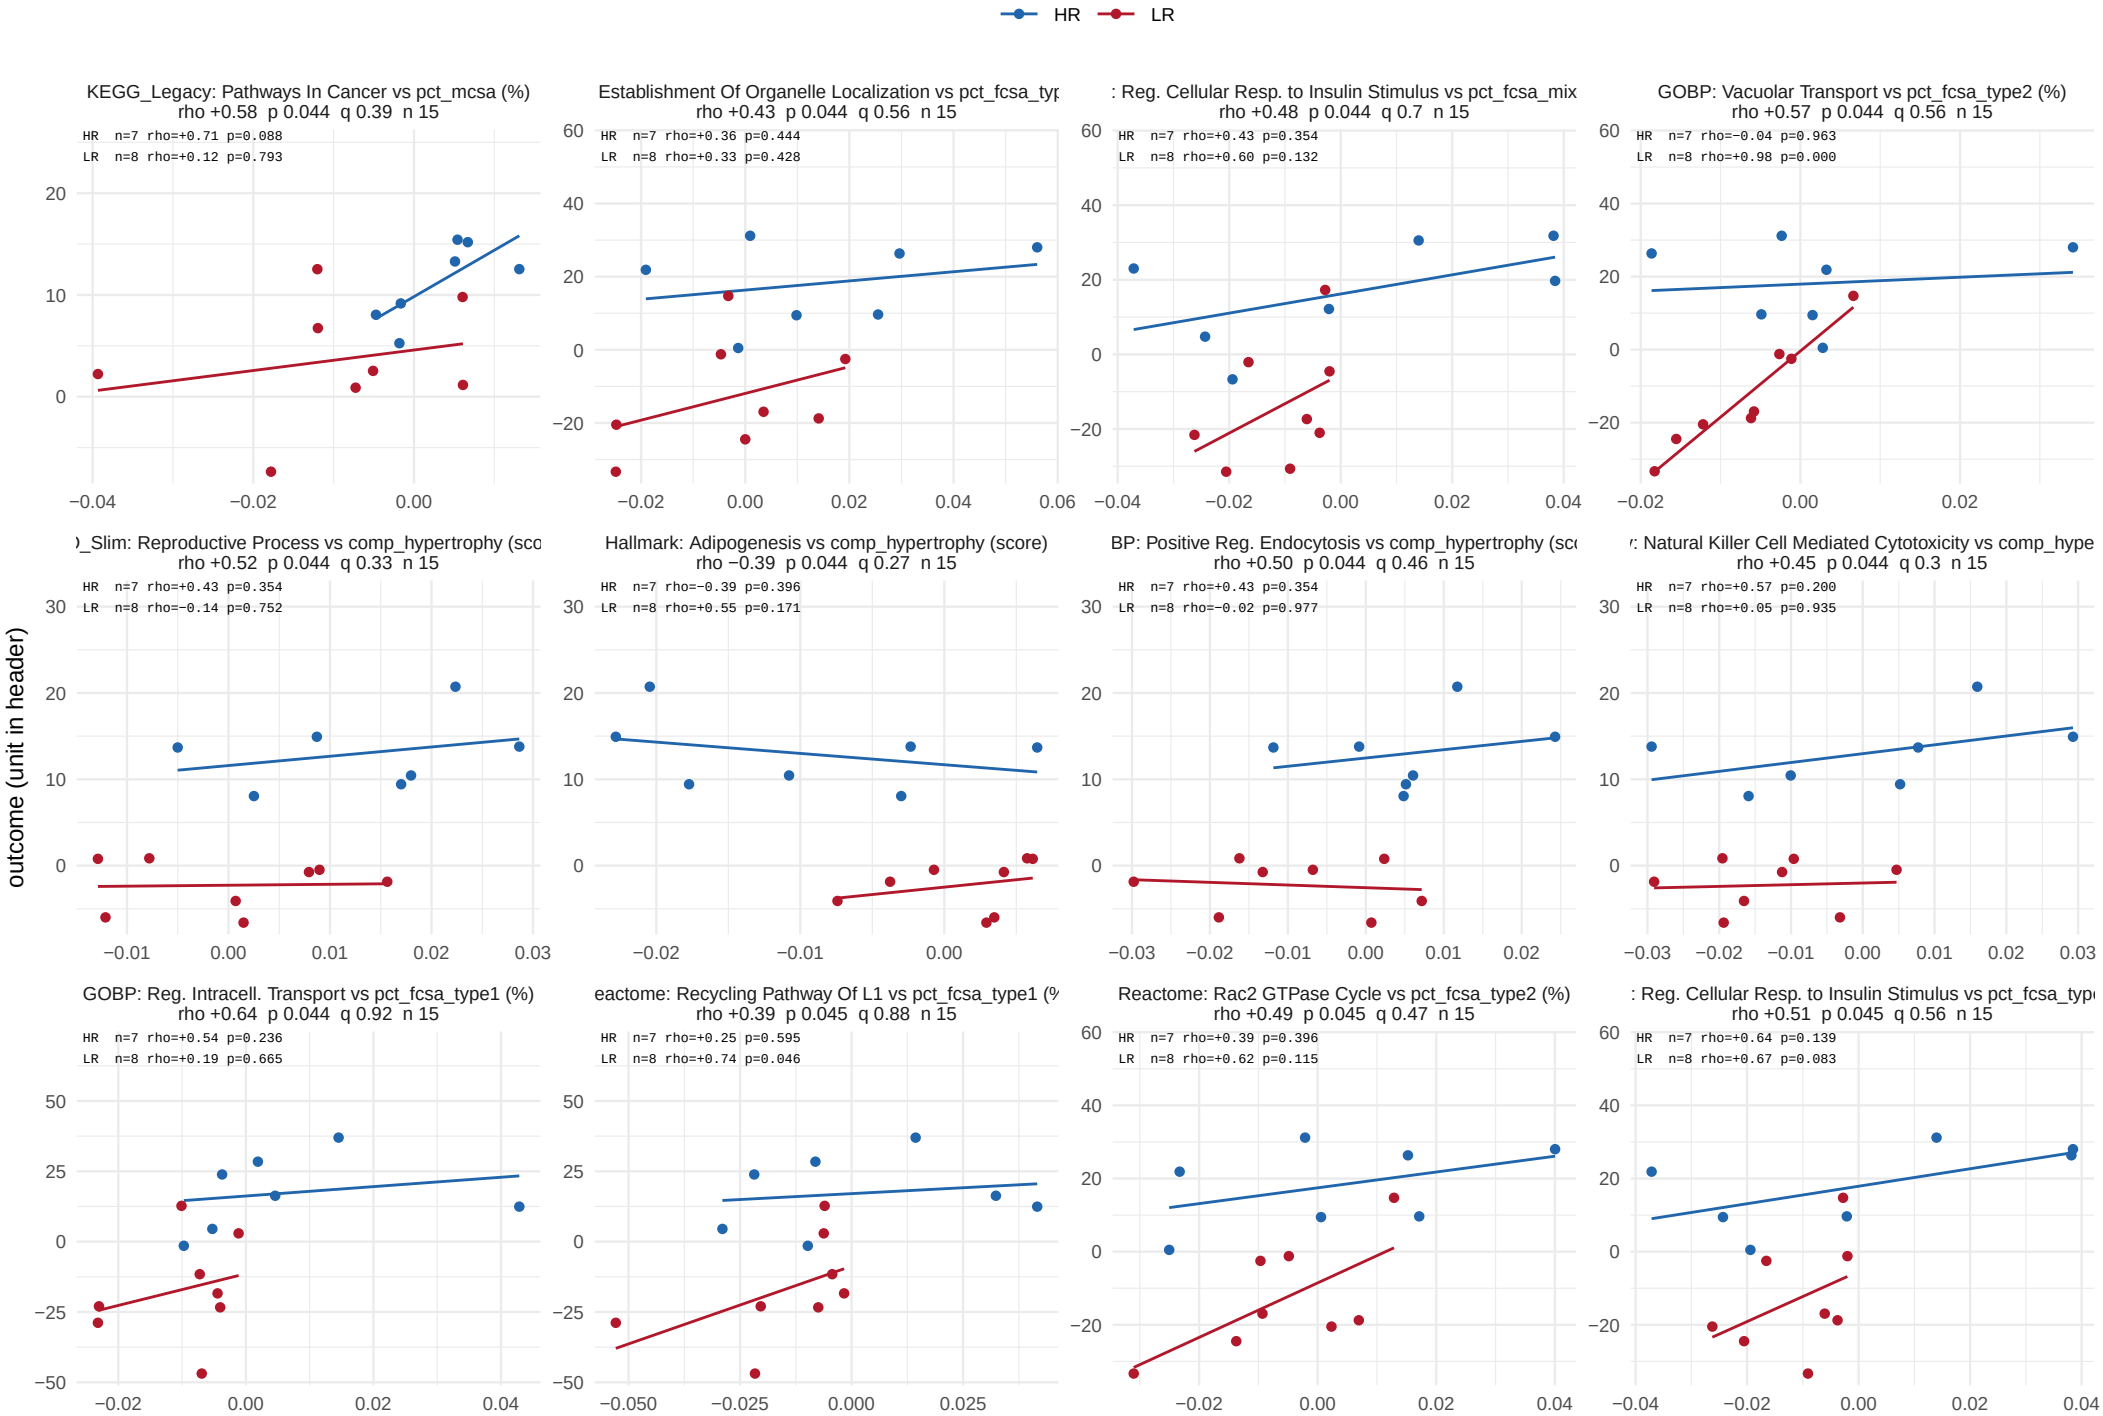

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


494 of 11024 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 38 of 42.

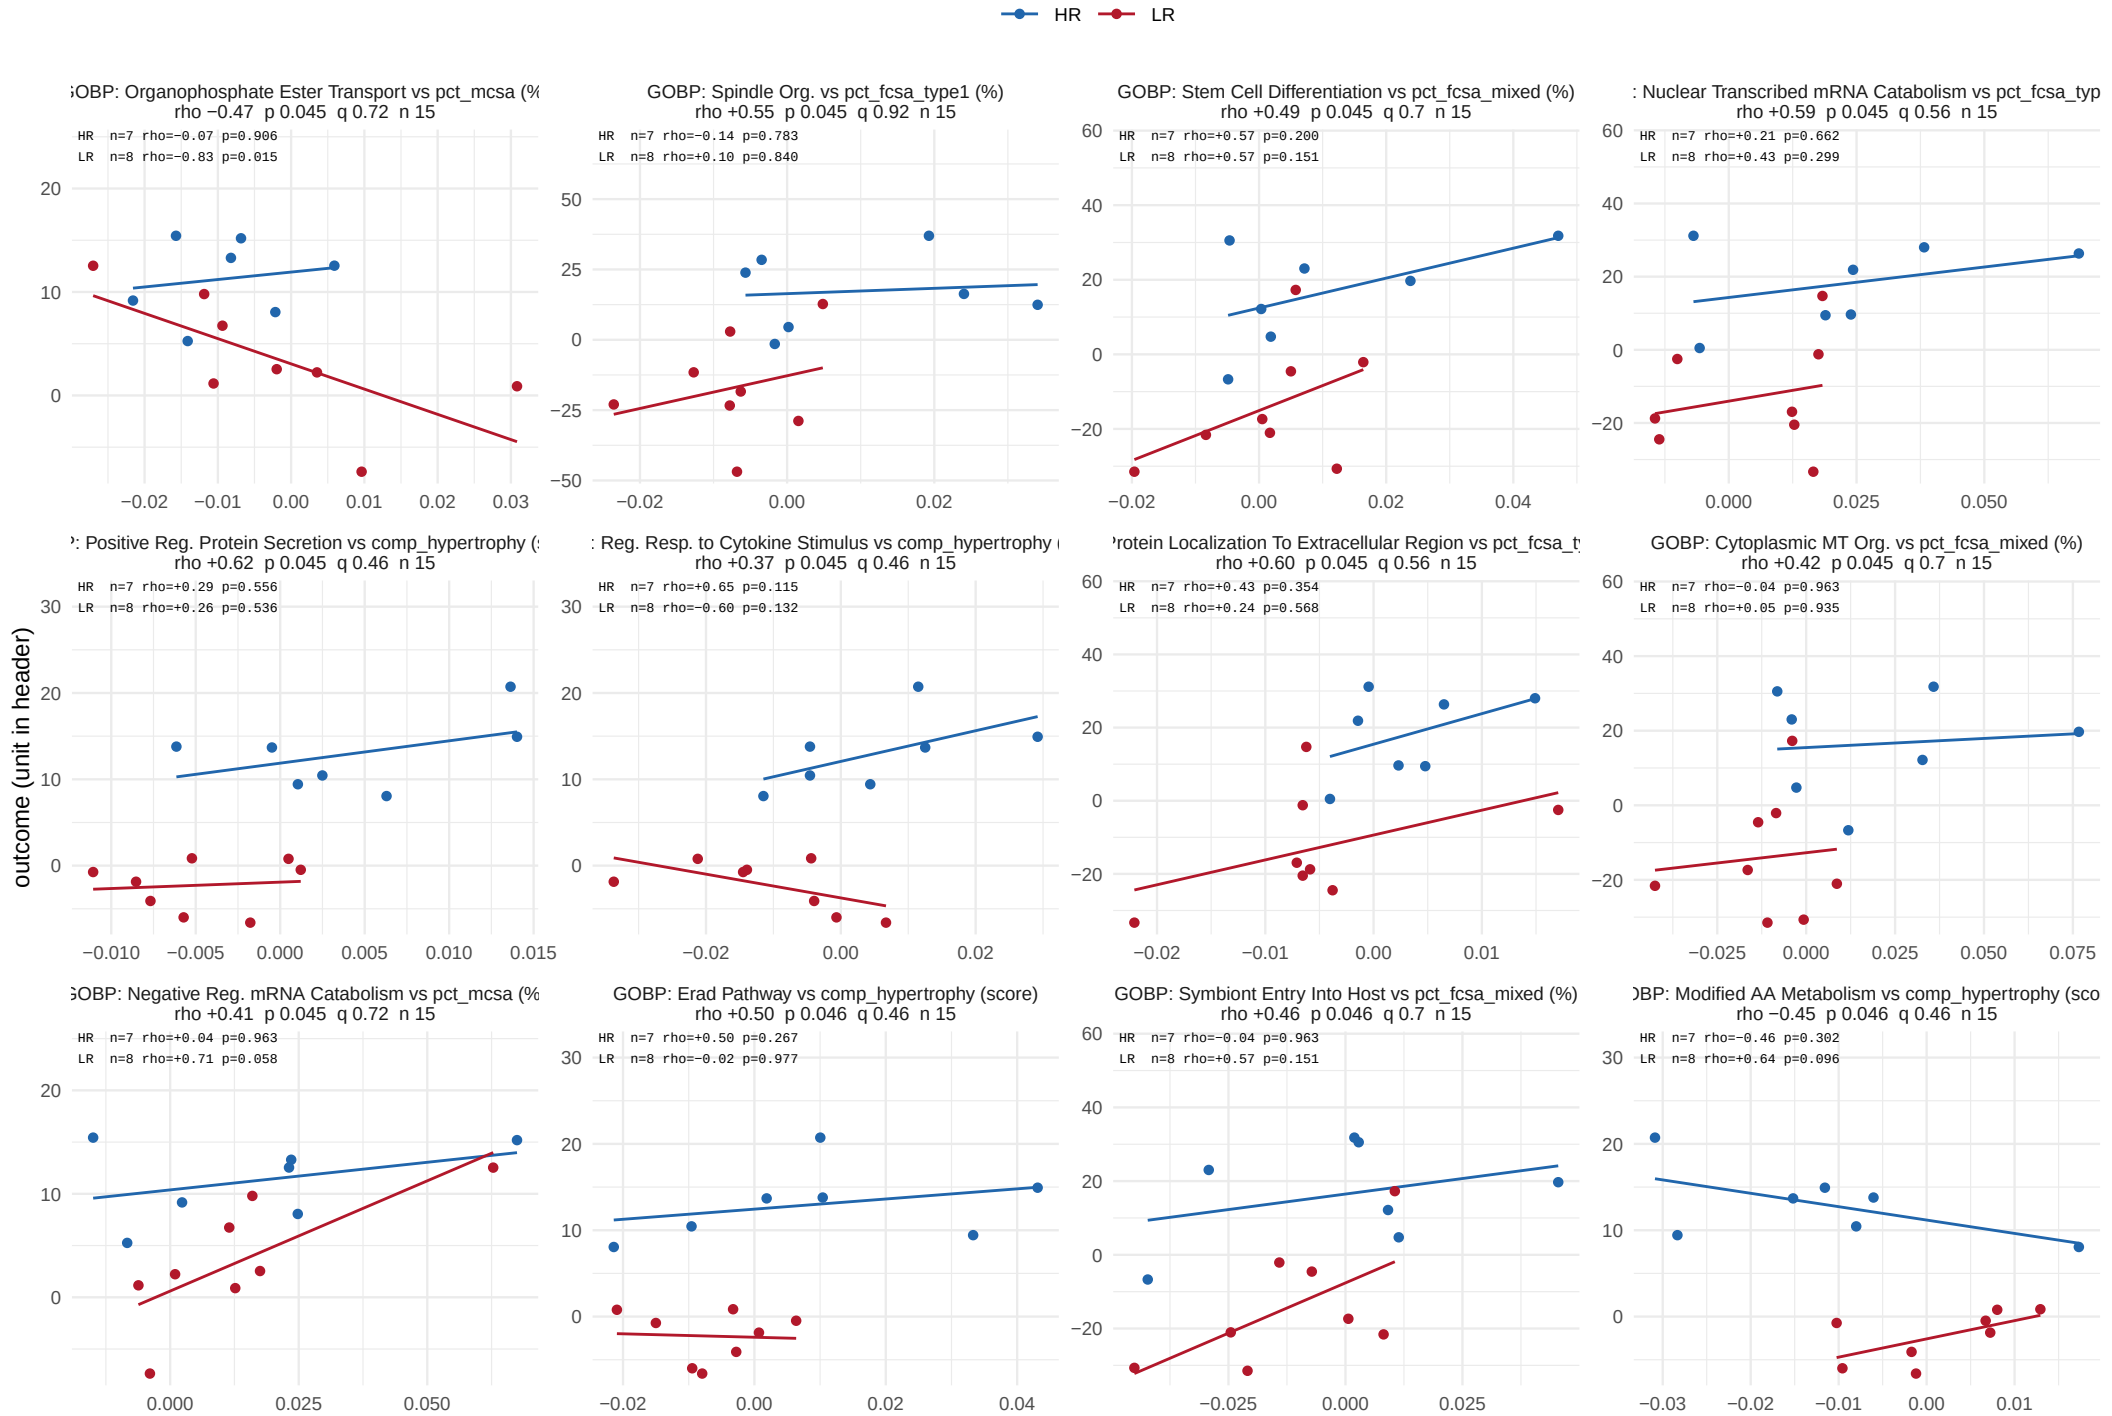

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


494 of 11024 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 39 of 42.

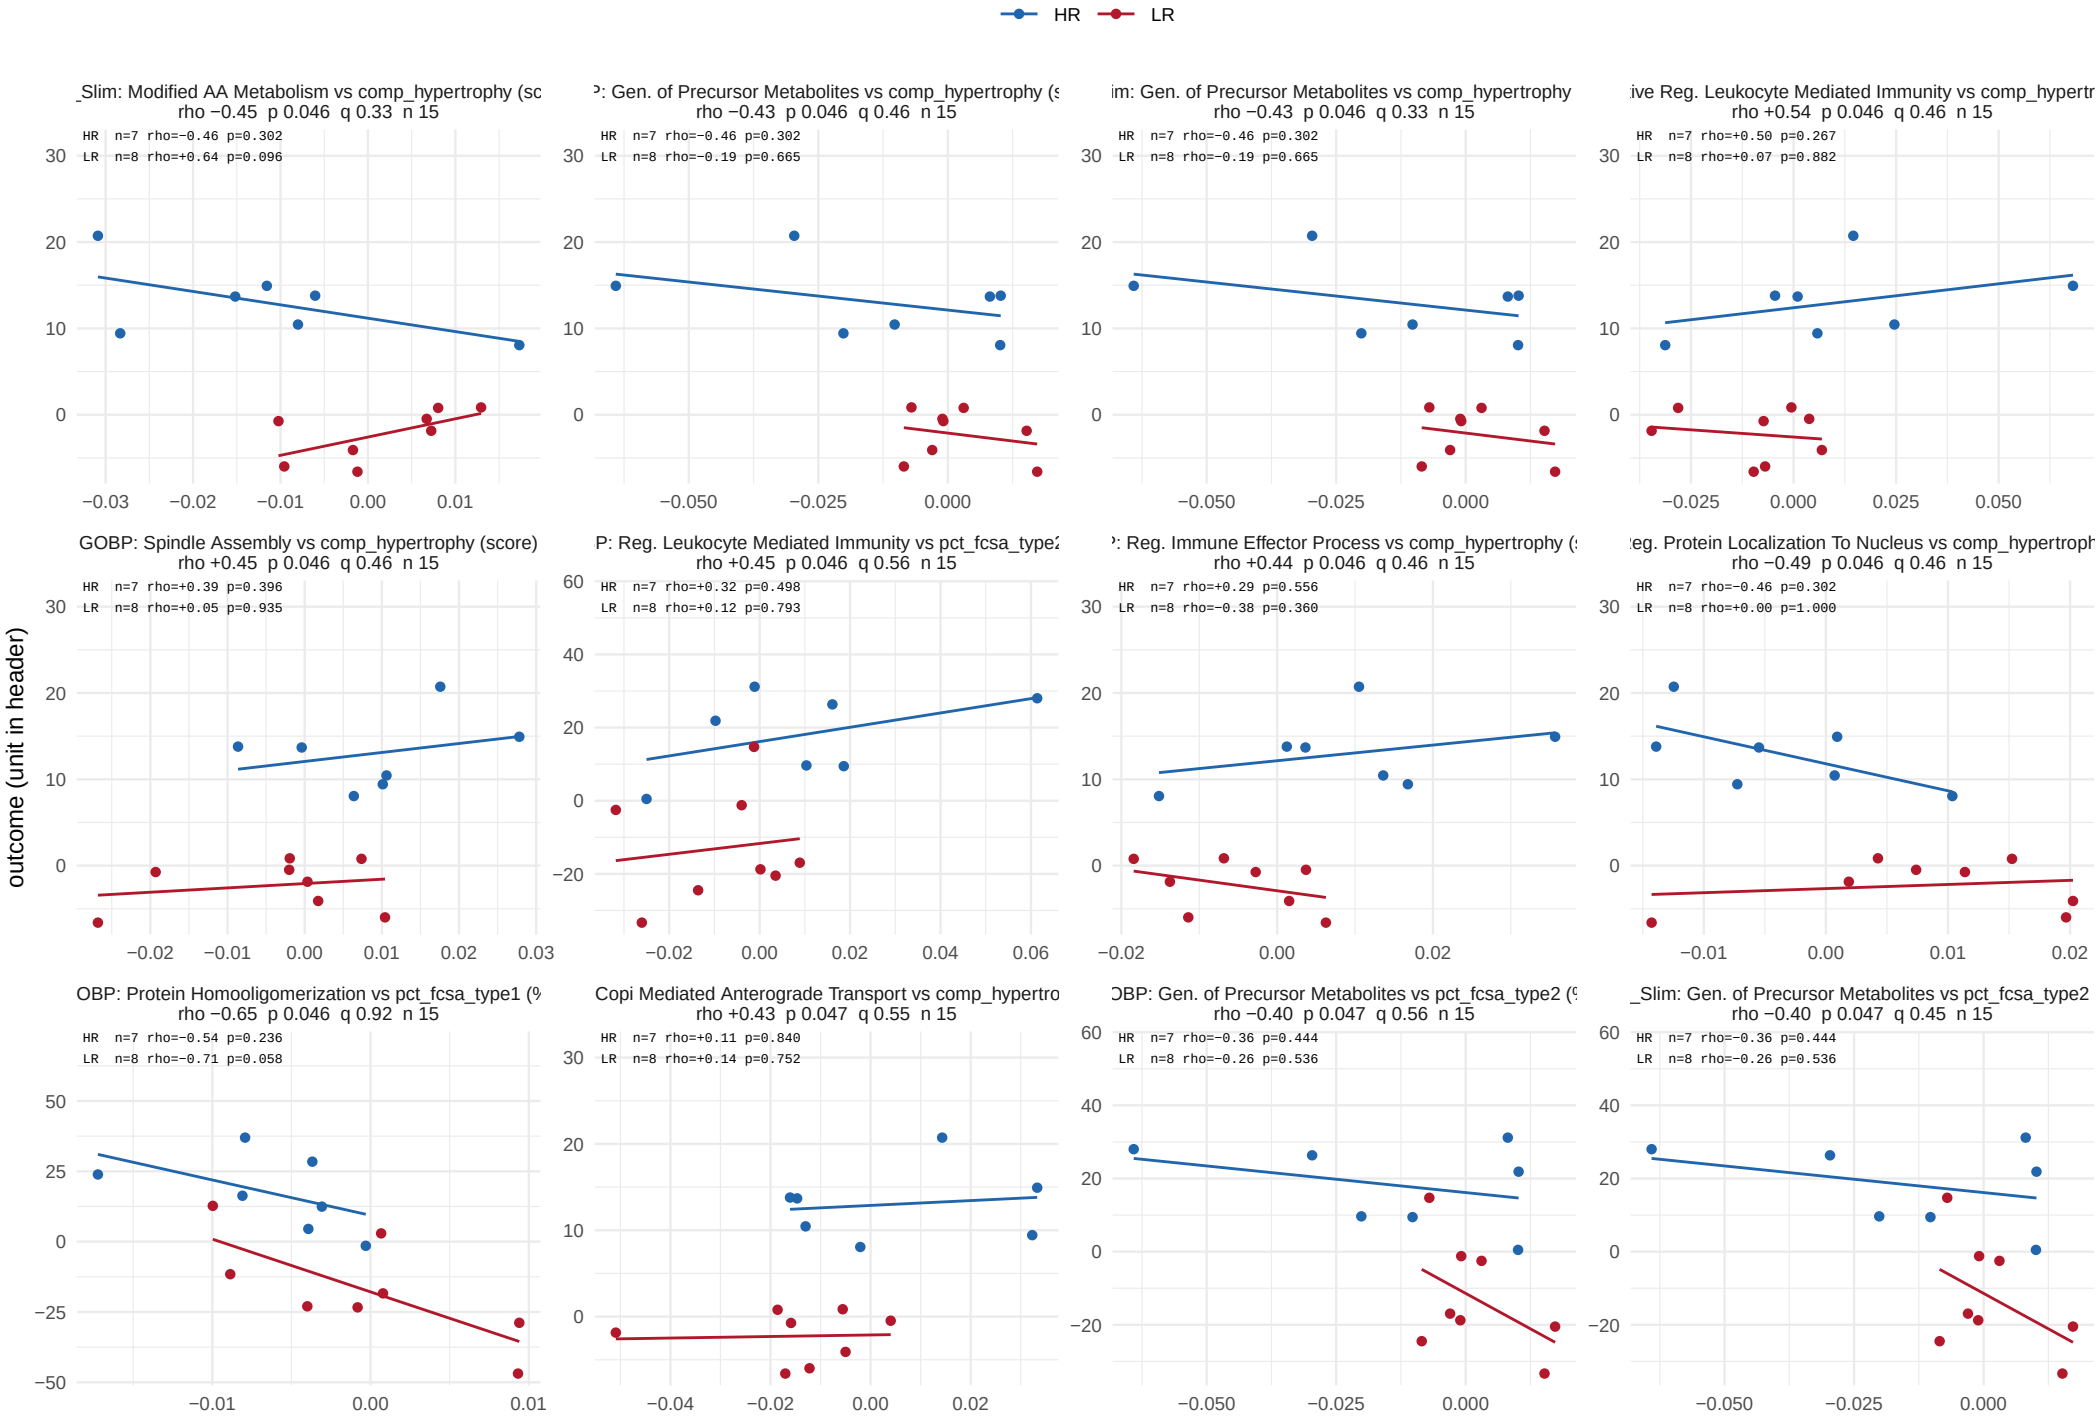

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


494 of 11024 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 40 of 42.

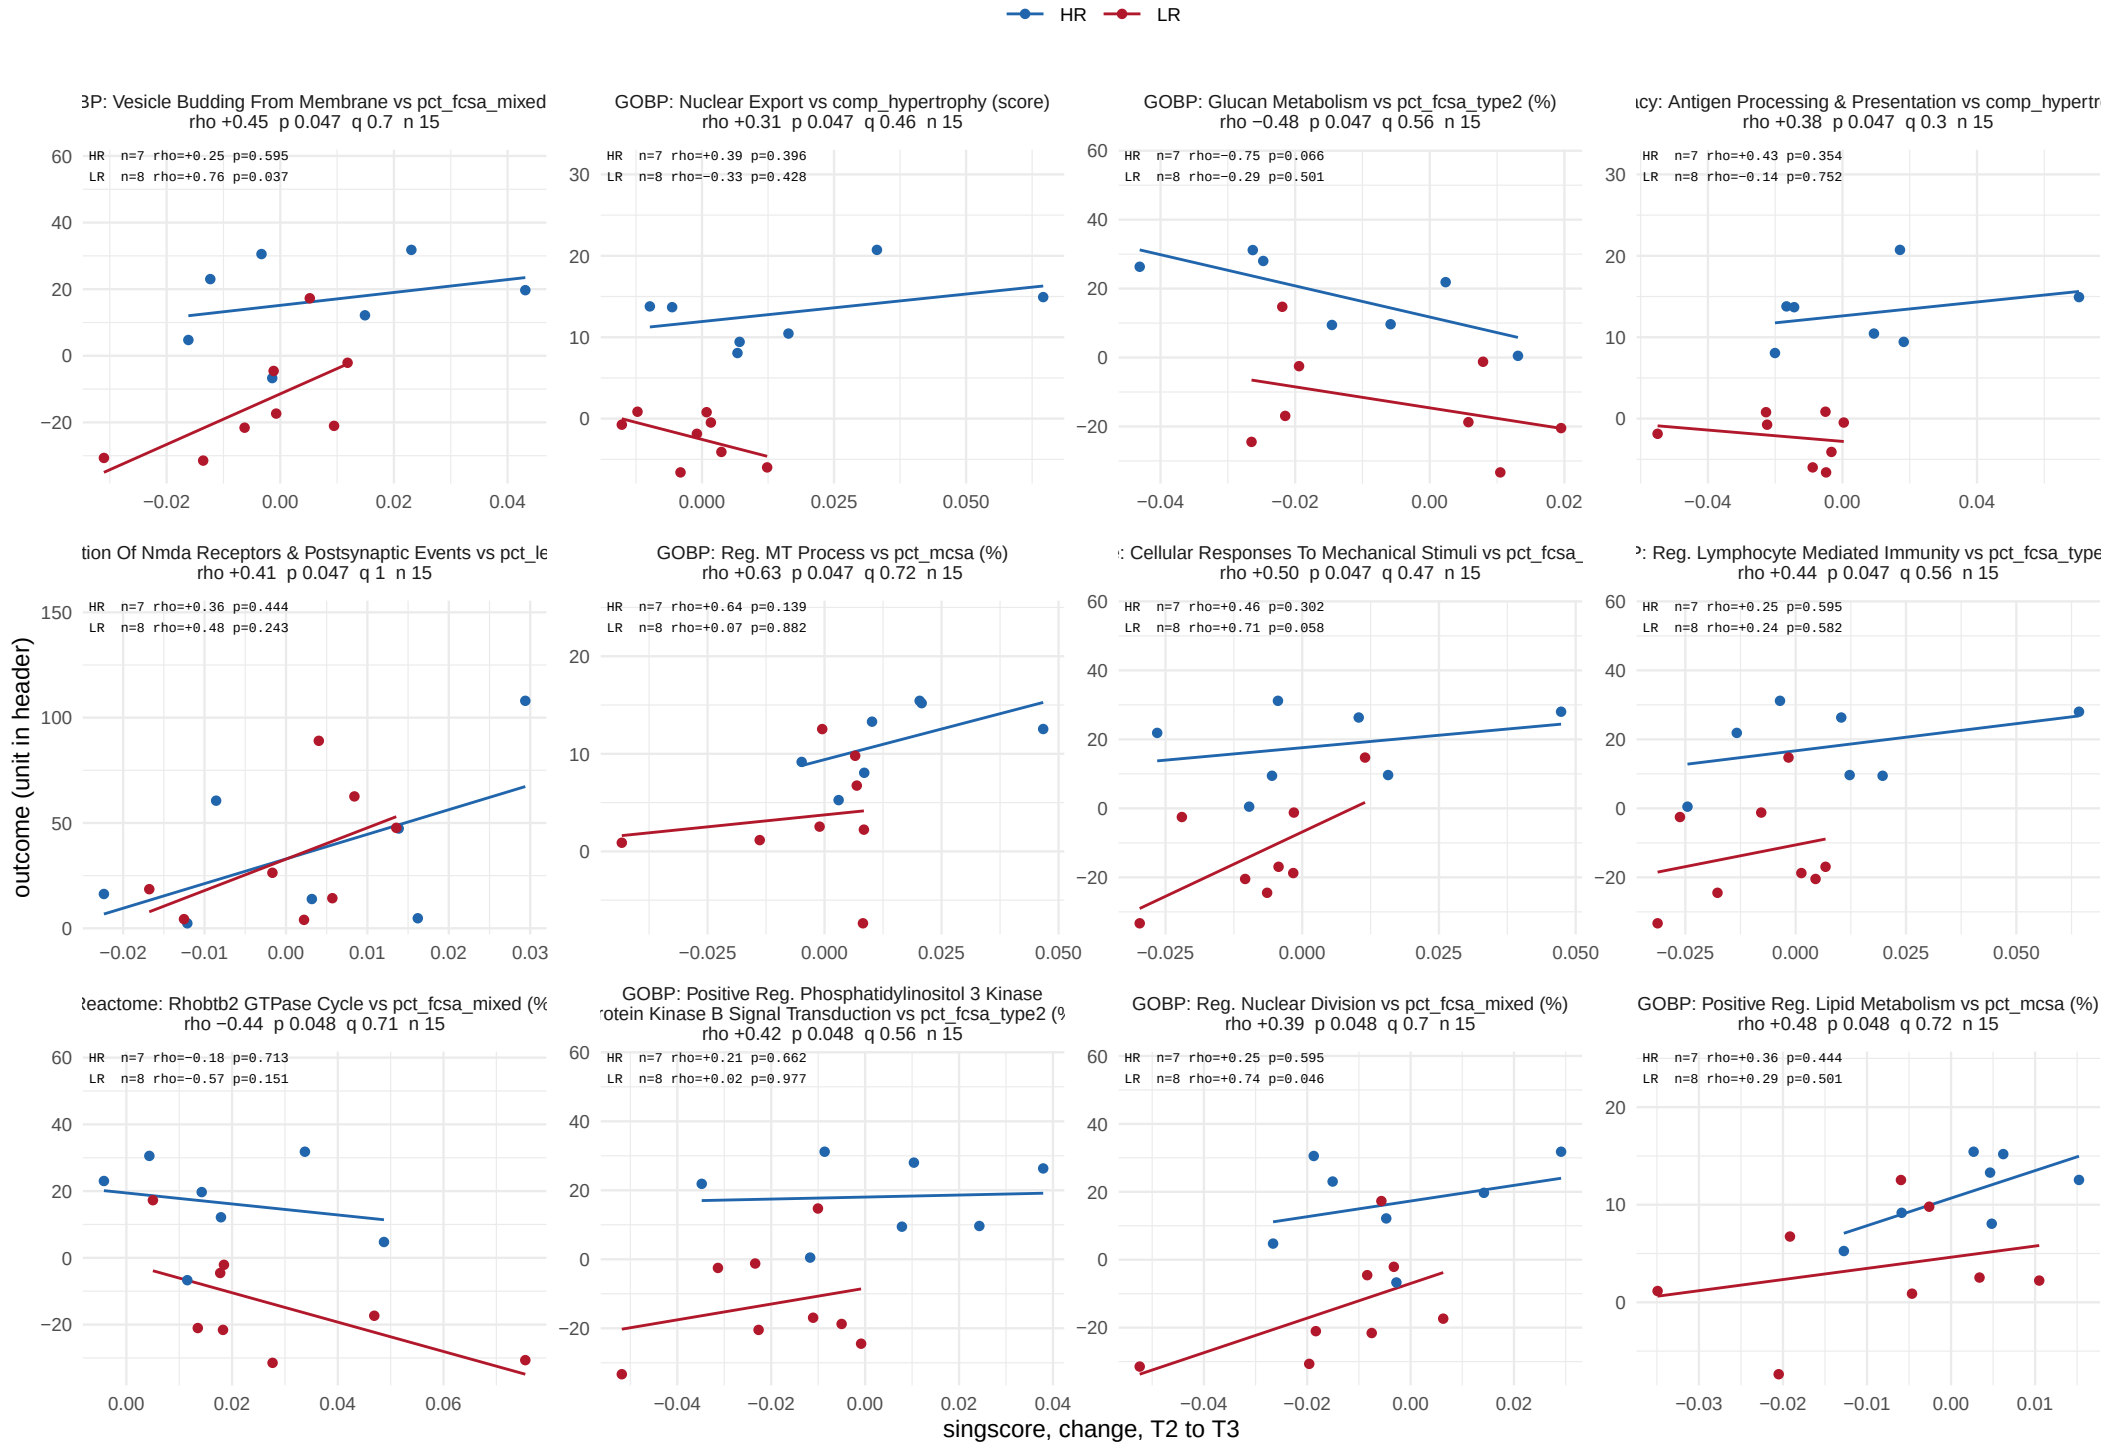

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


494 of 11024 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 41 of 42.

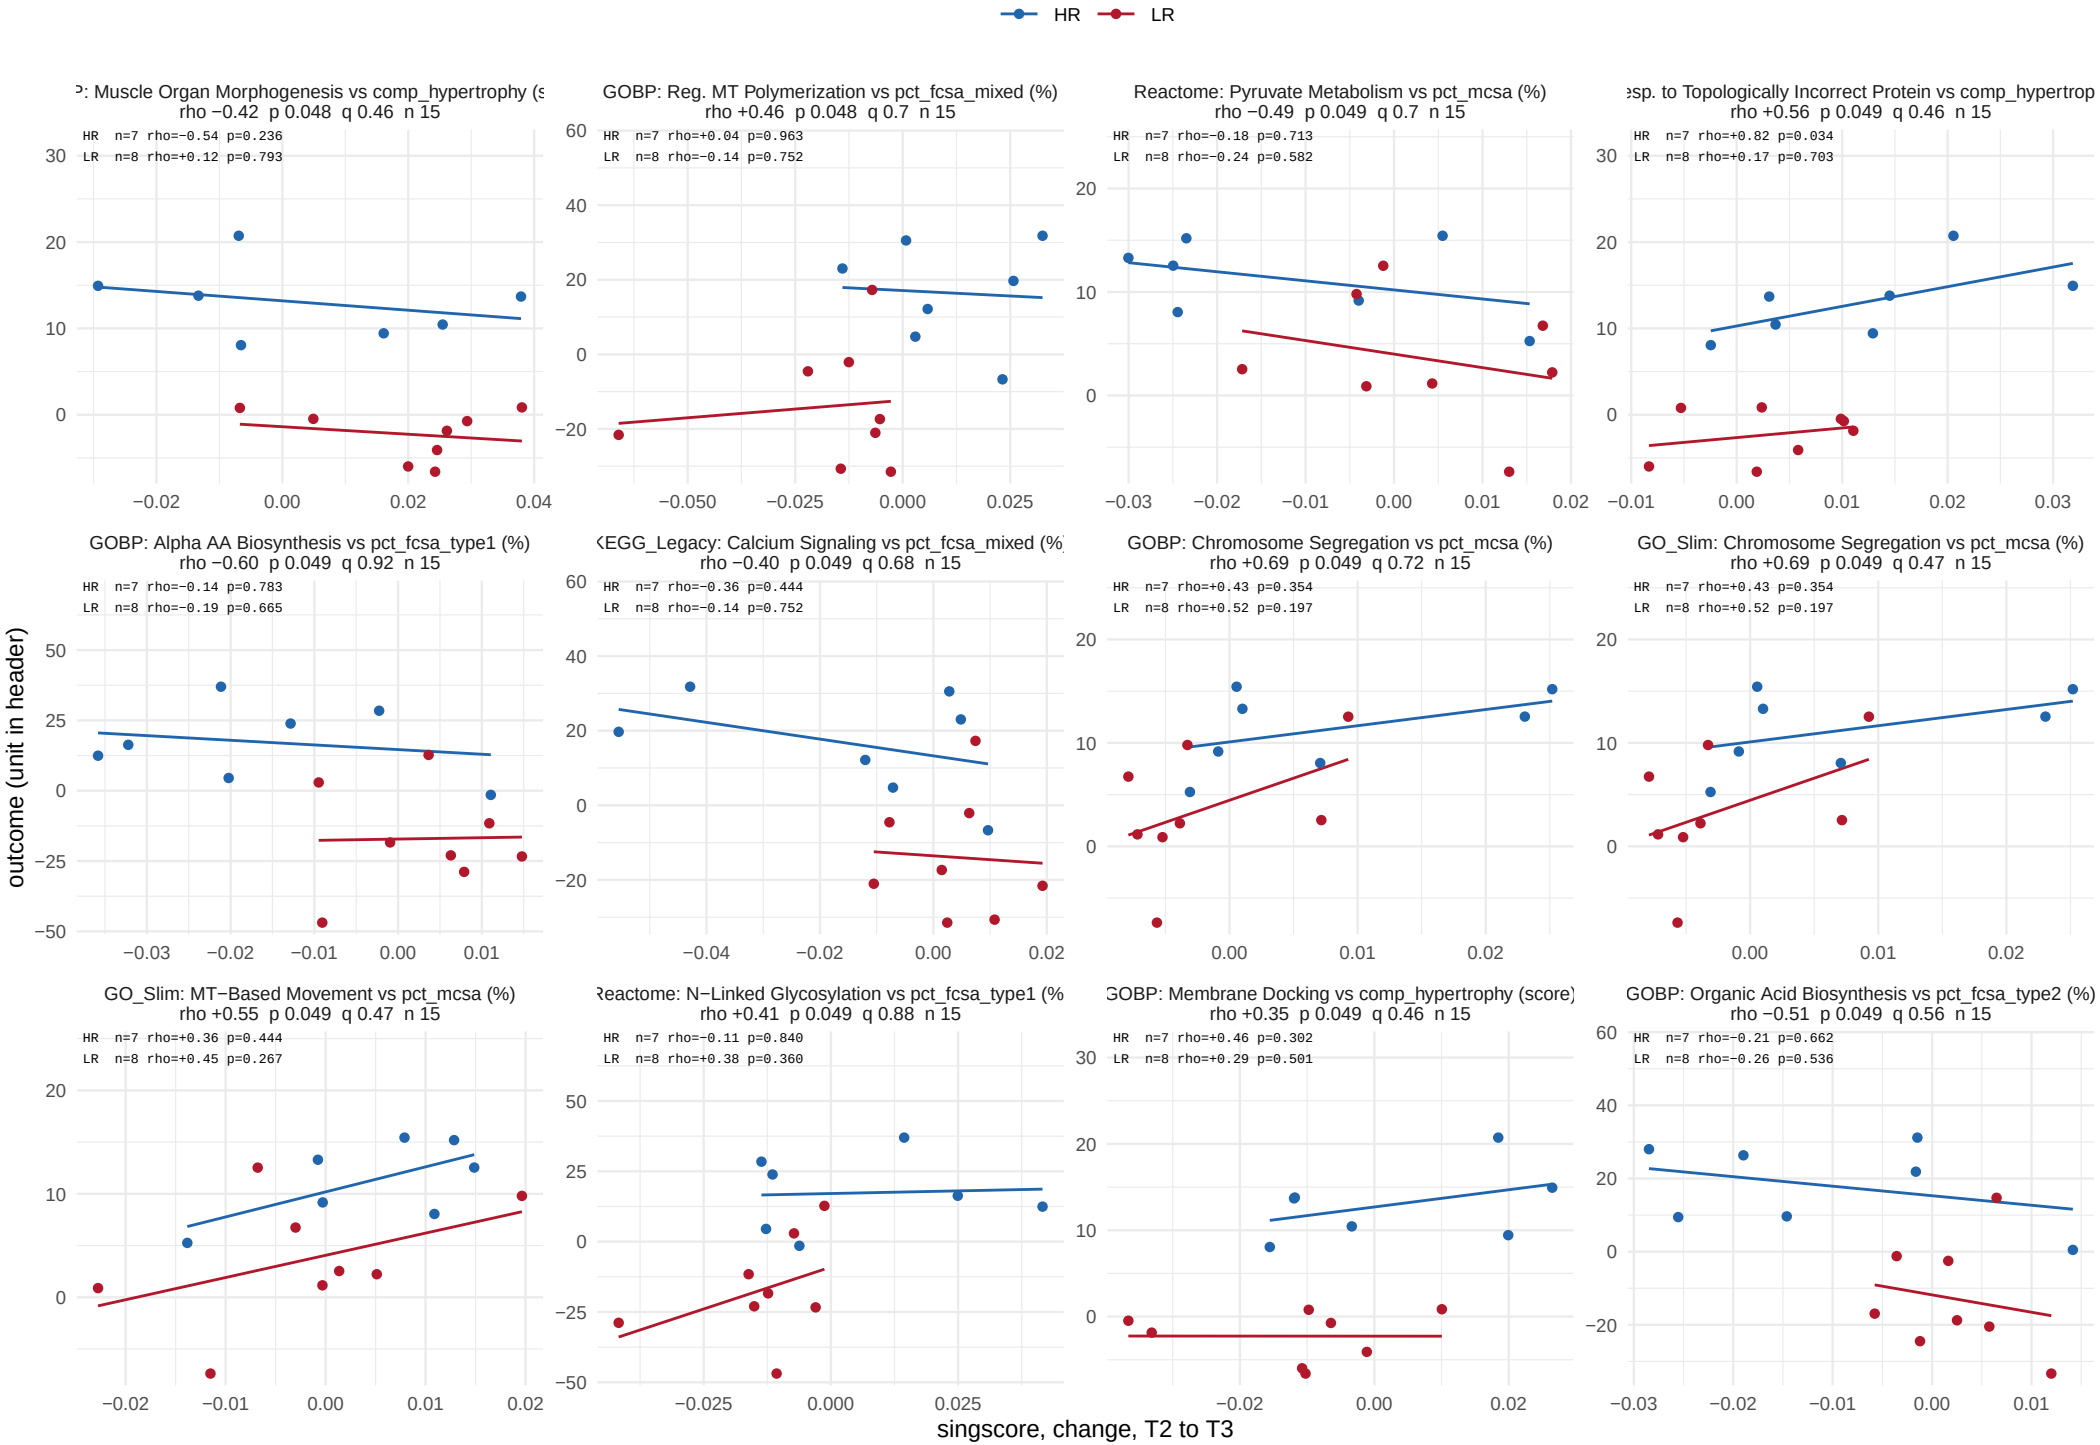

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window

494 of 11024 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 42 of 42.

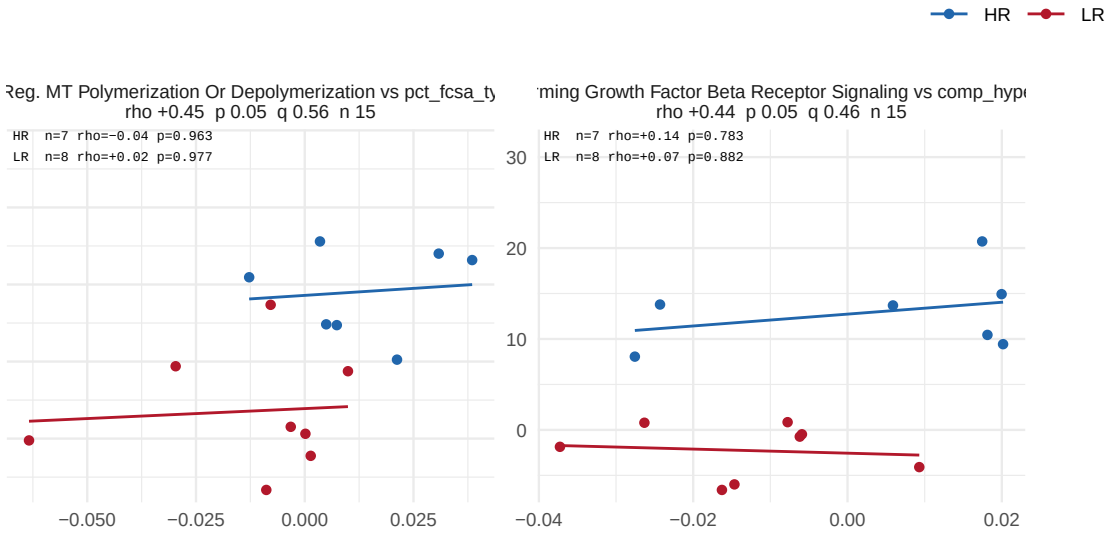


outcome (unit in header)

singscore, change, T2 to T3

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


653 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 1 of 55.

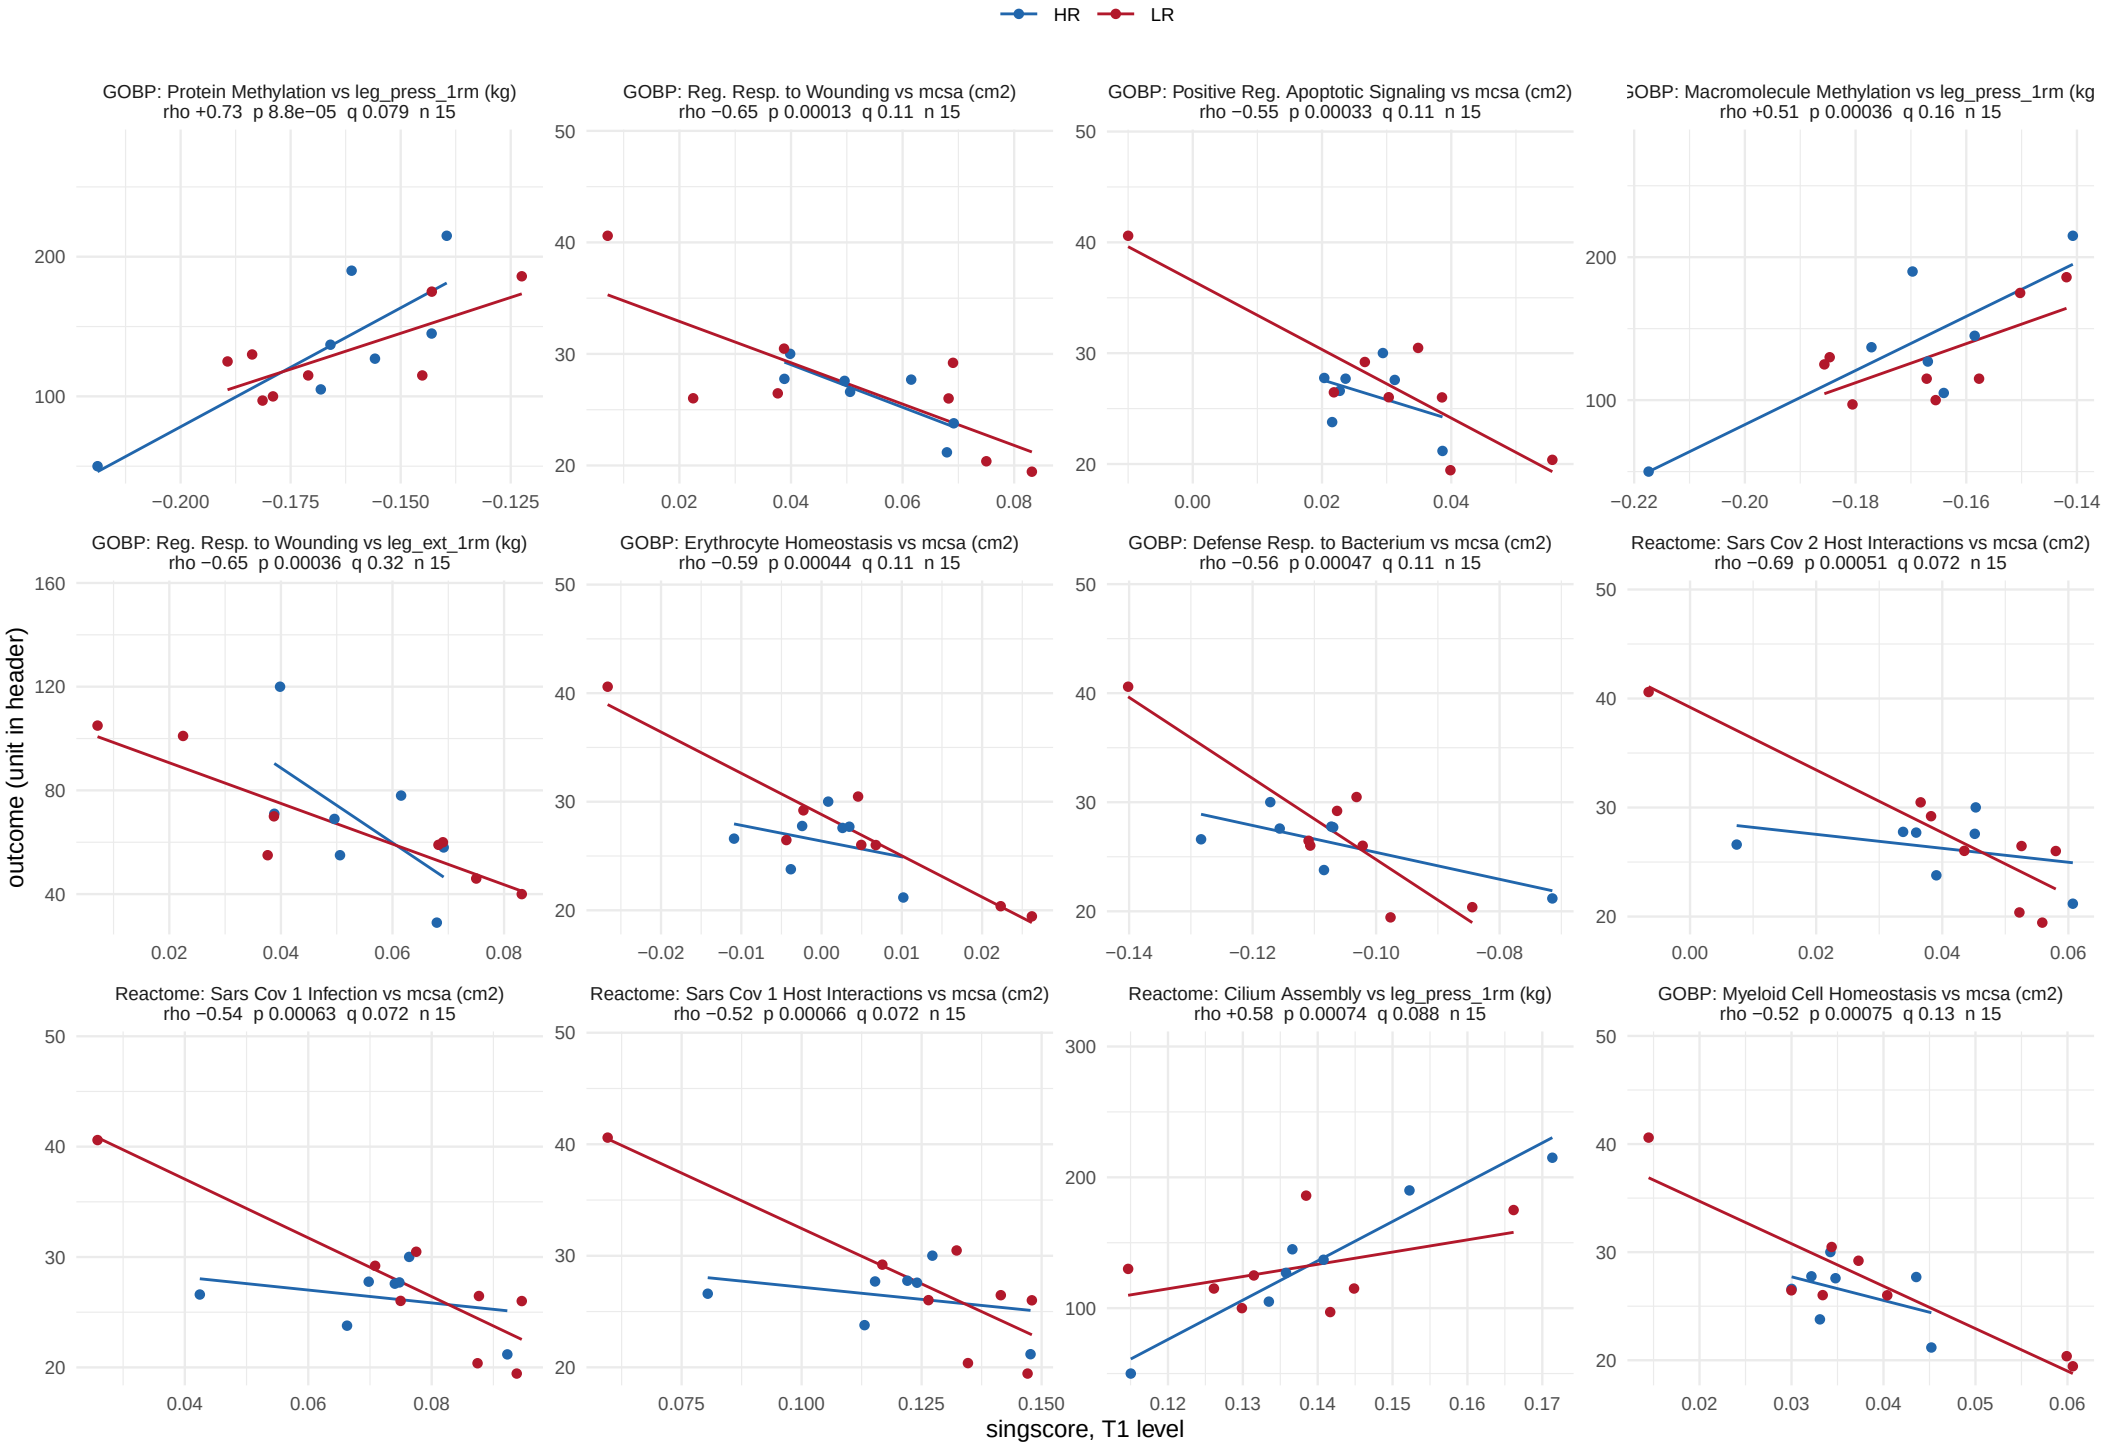

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


653 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 2 of 55.

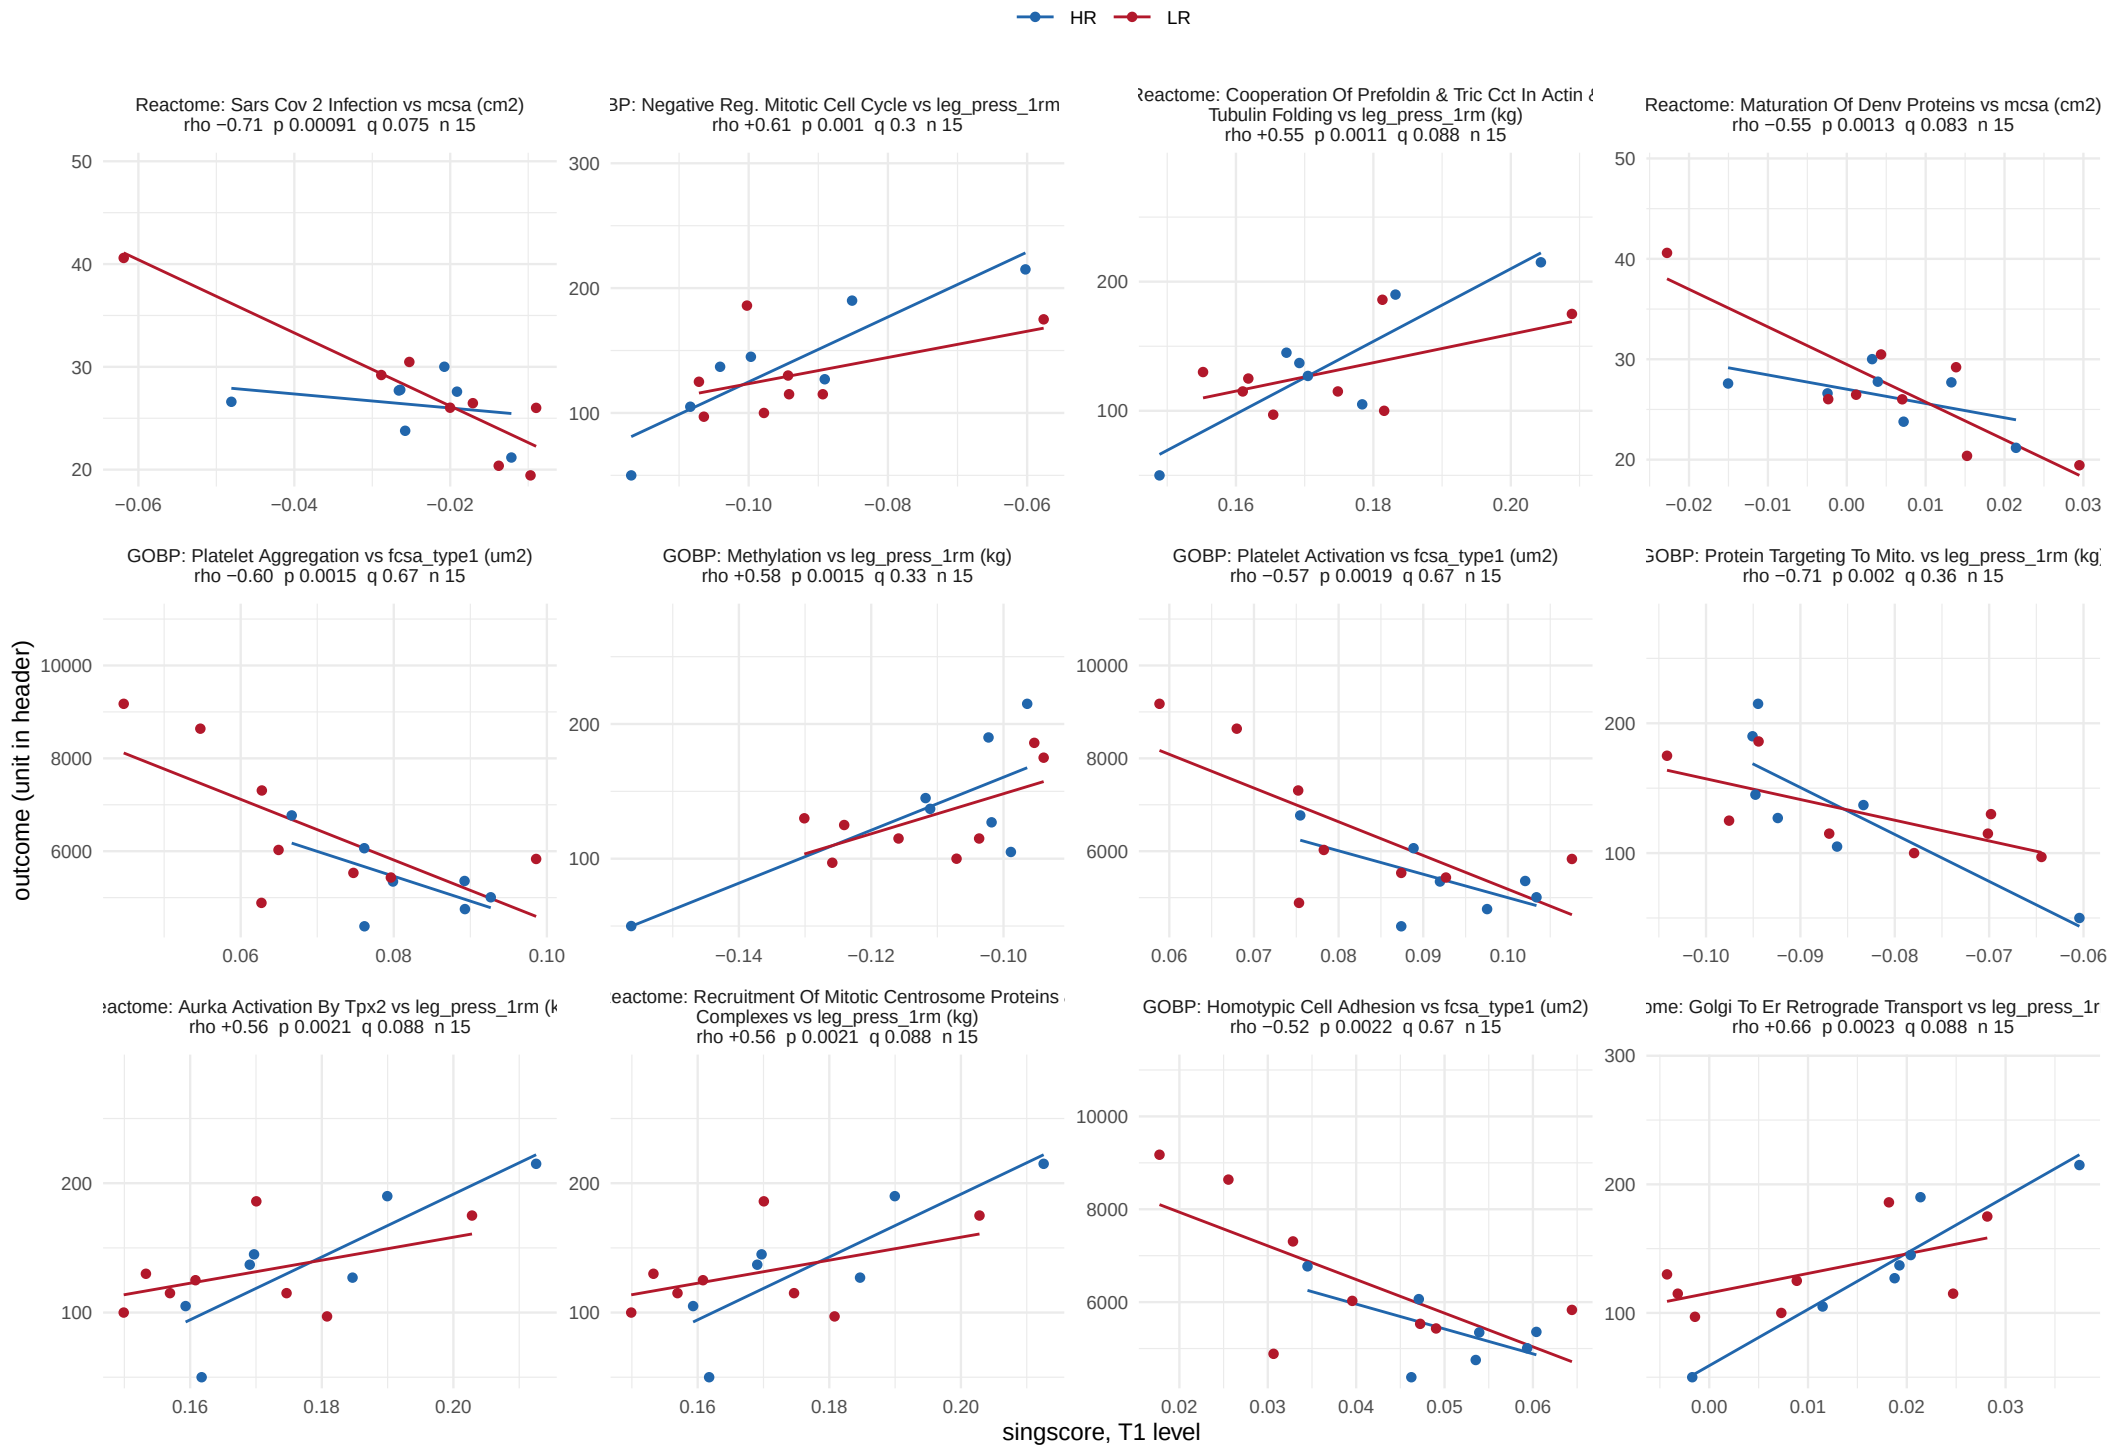

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


653 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 3 of 55.

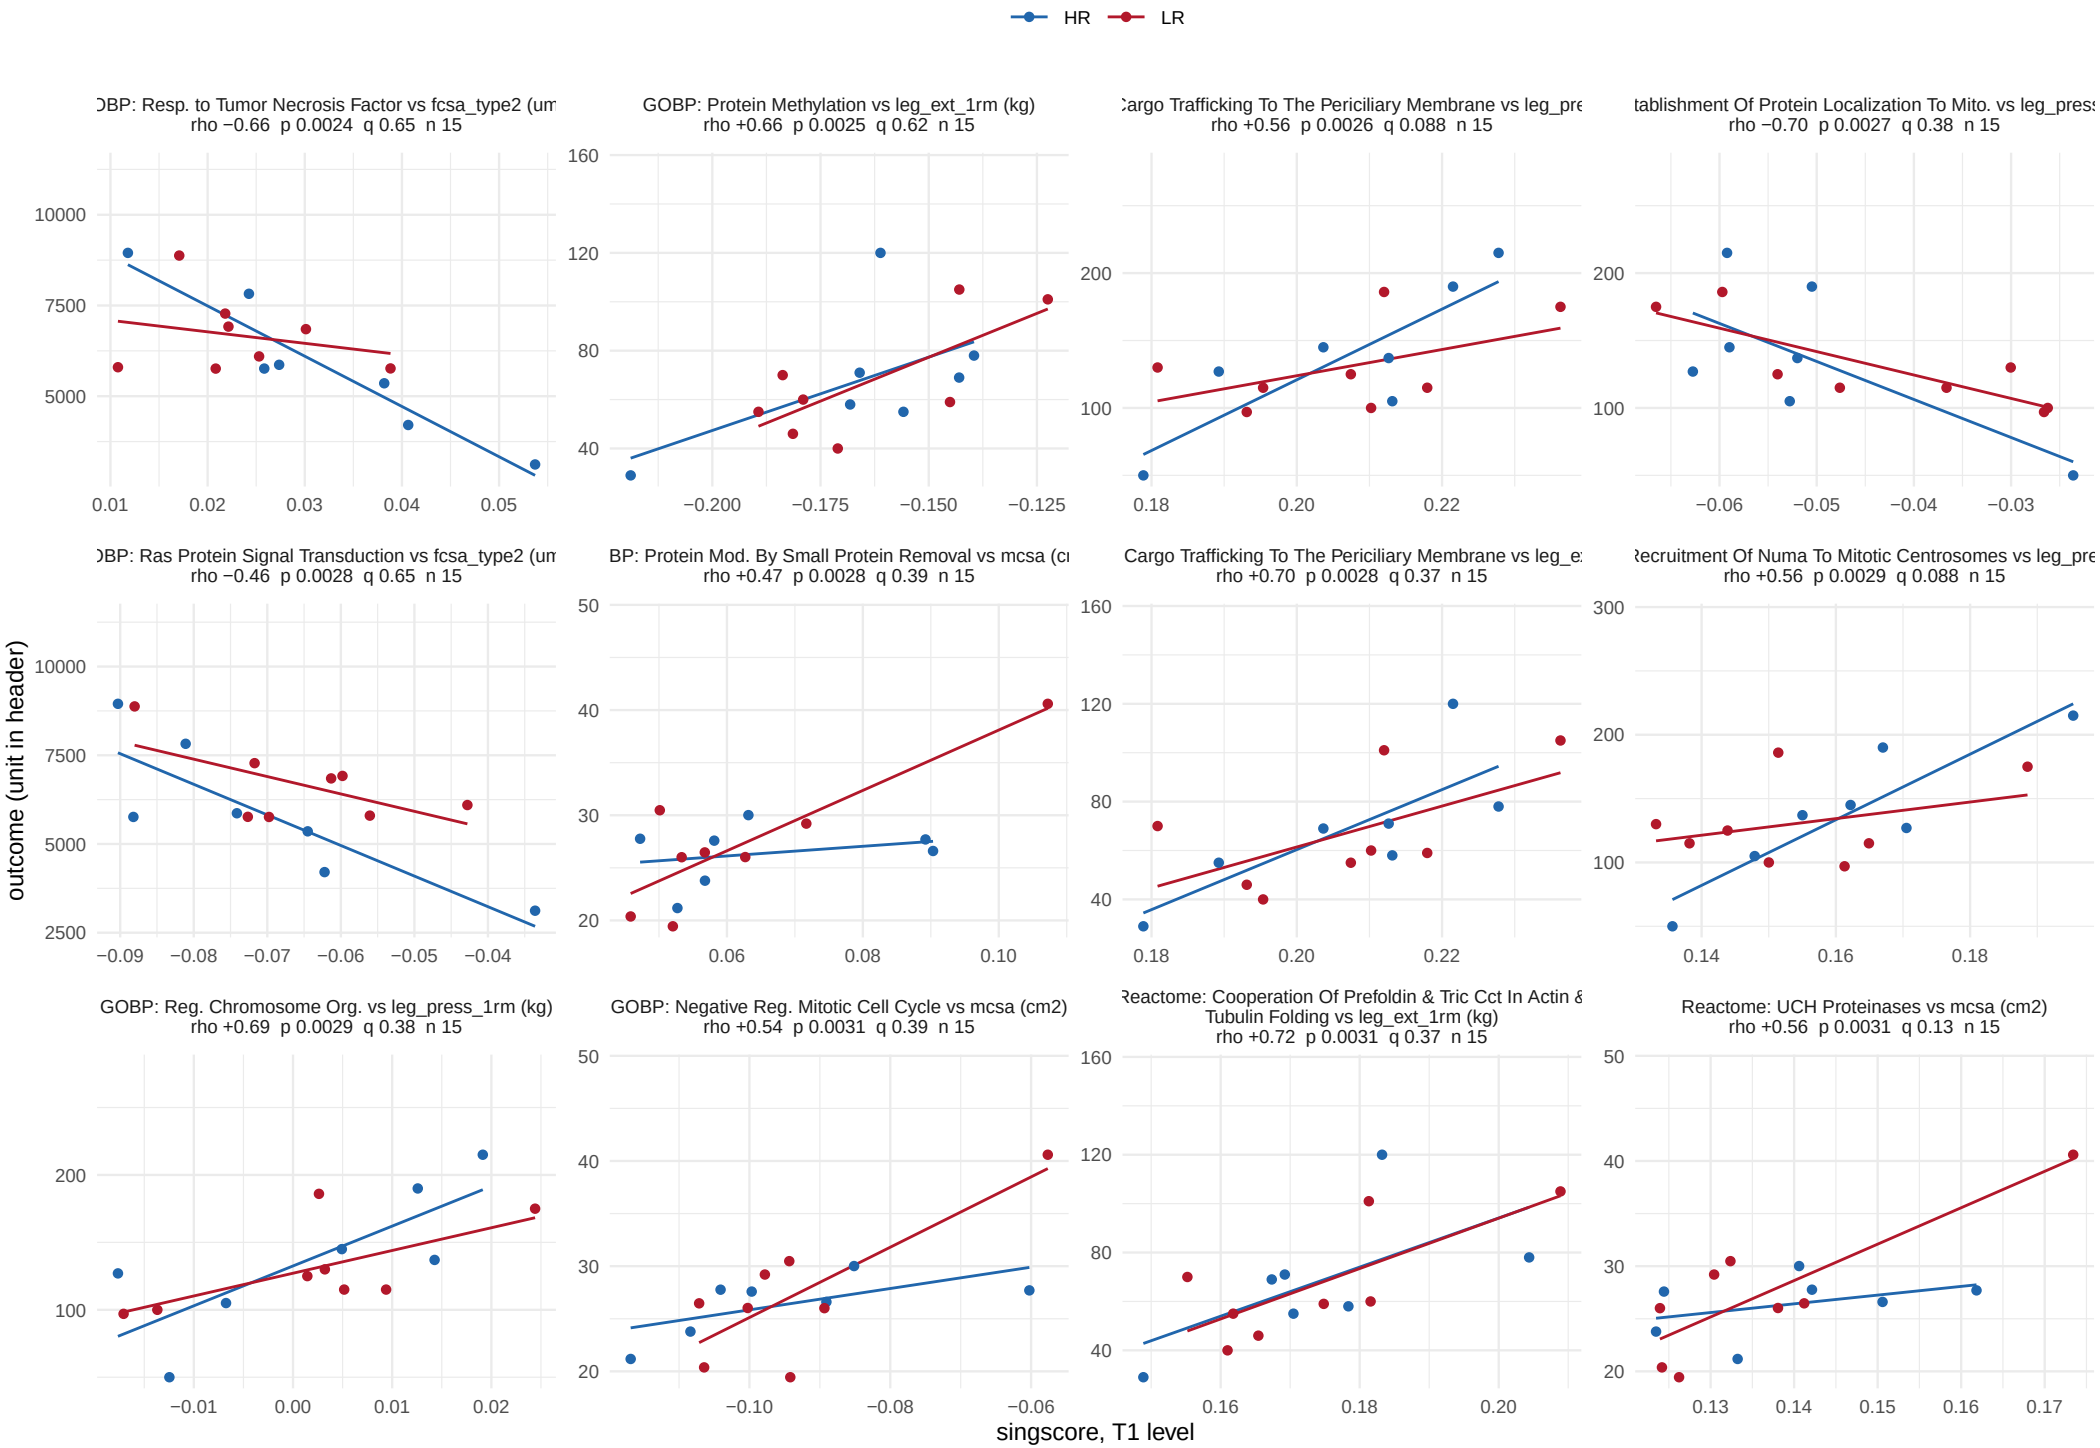

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


653 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 4 of 55.

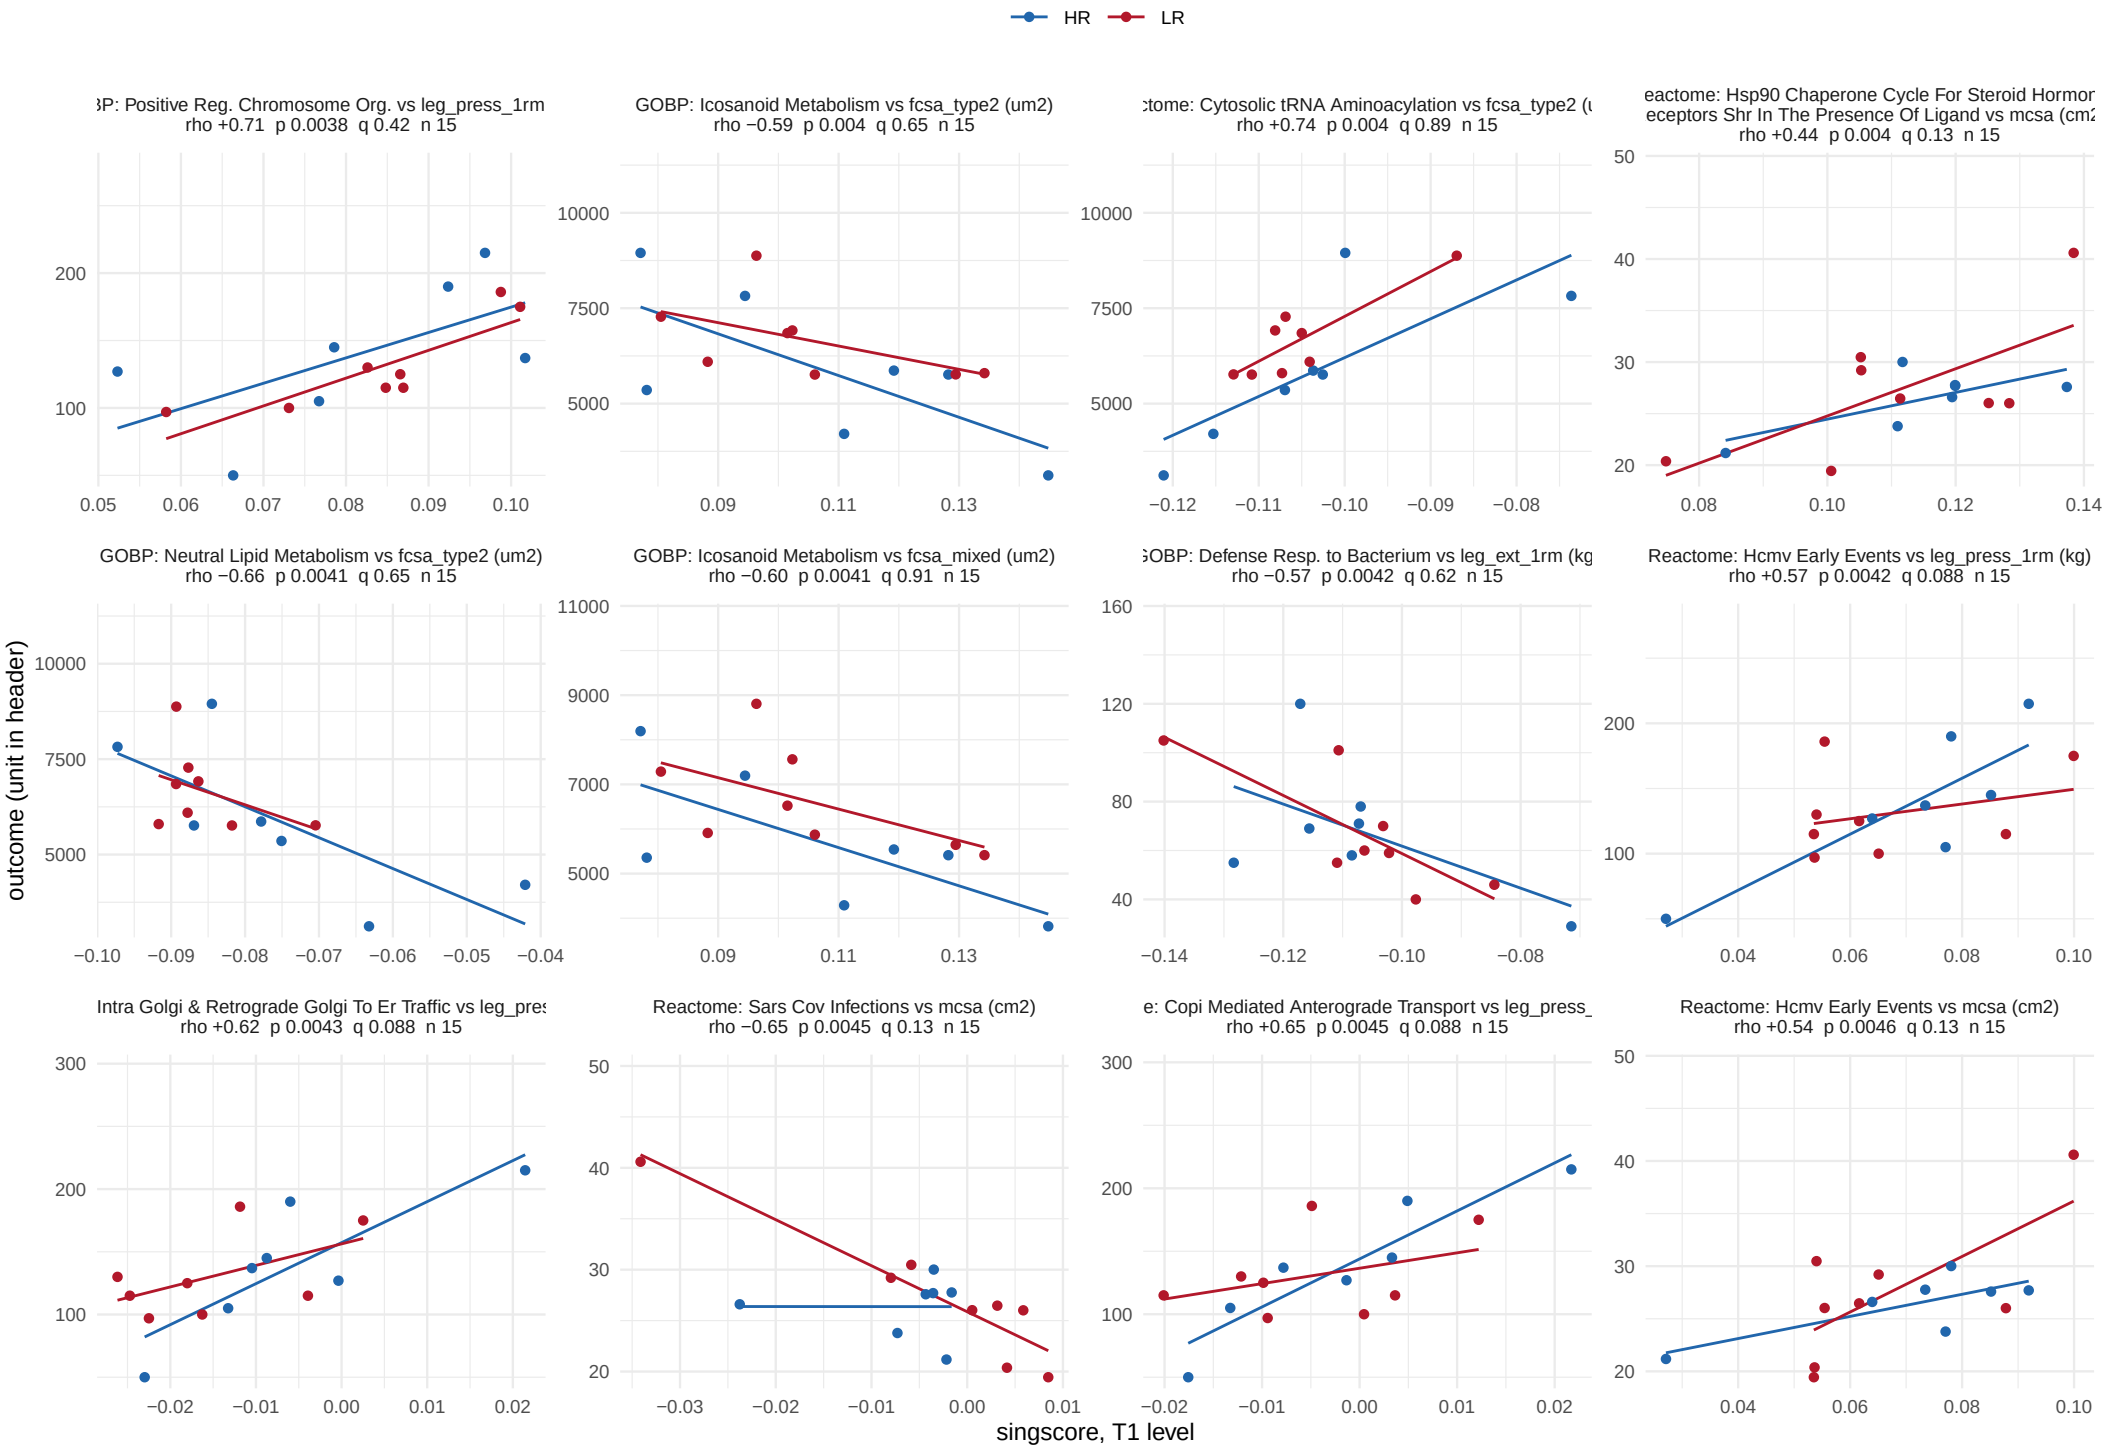

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


653 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 5 of 55.

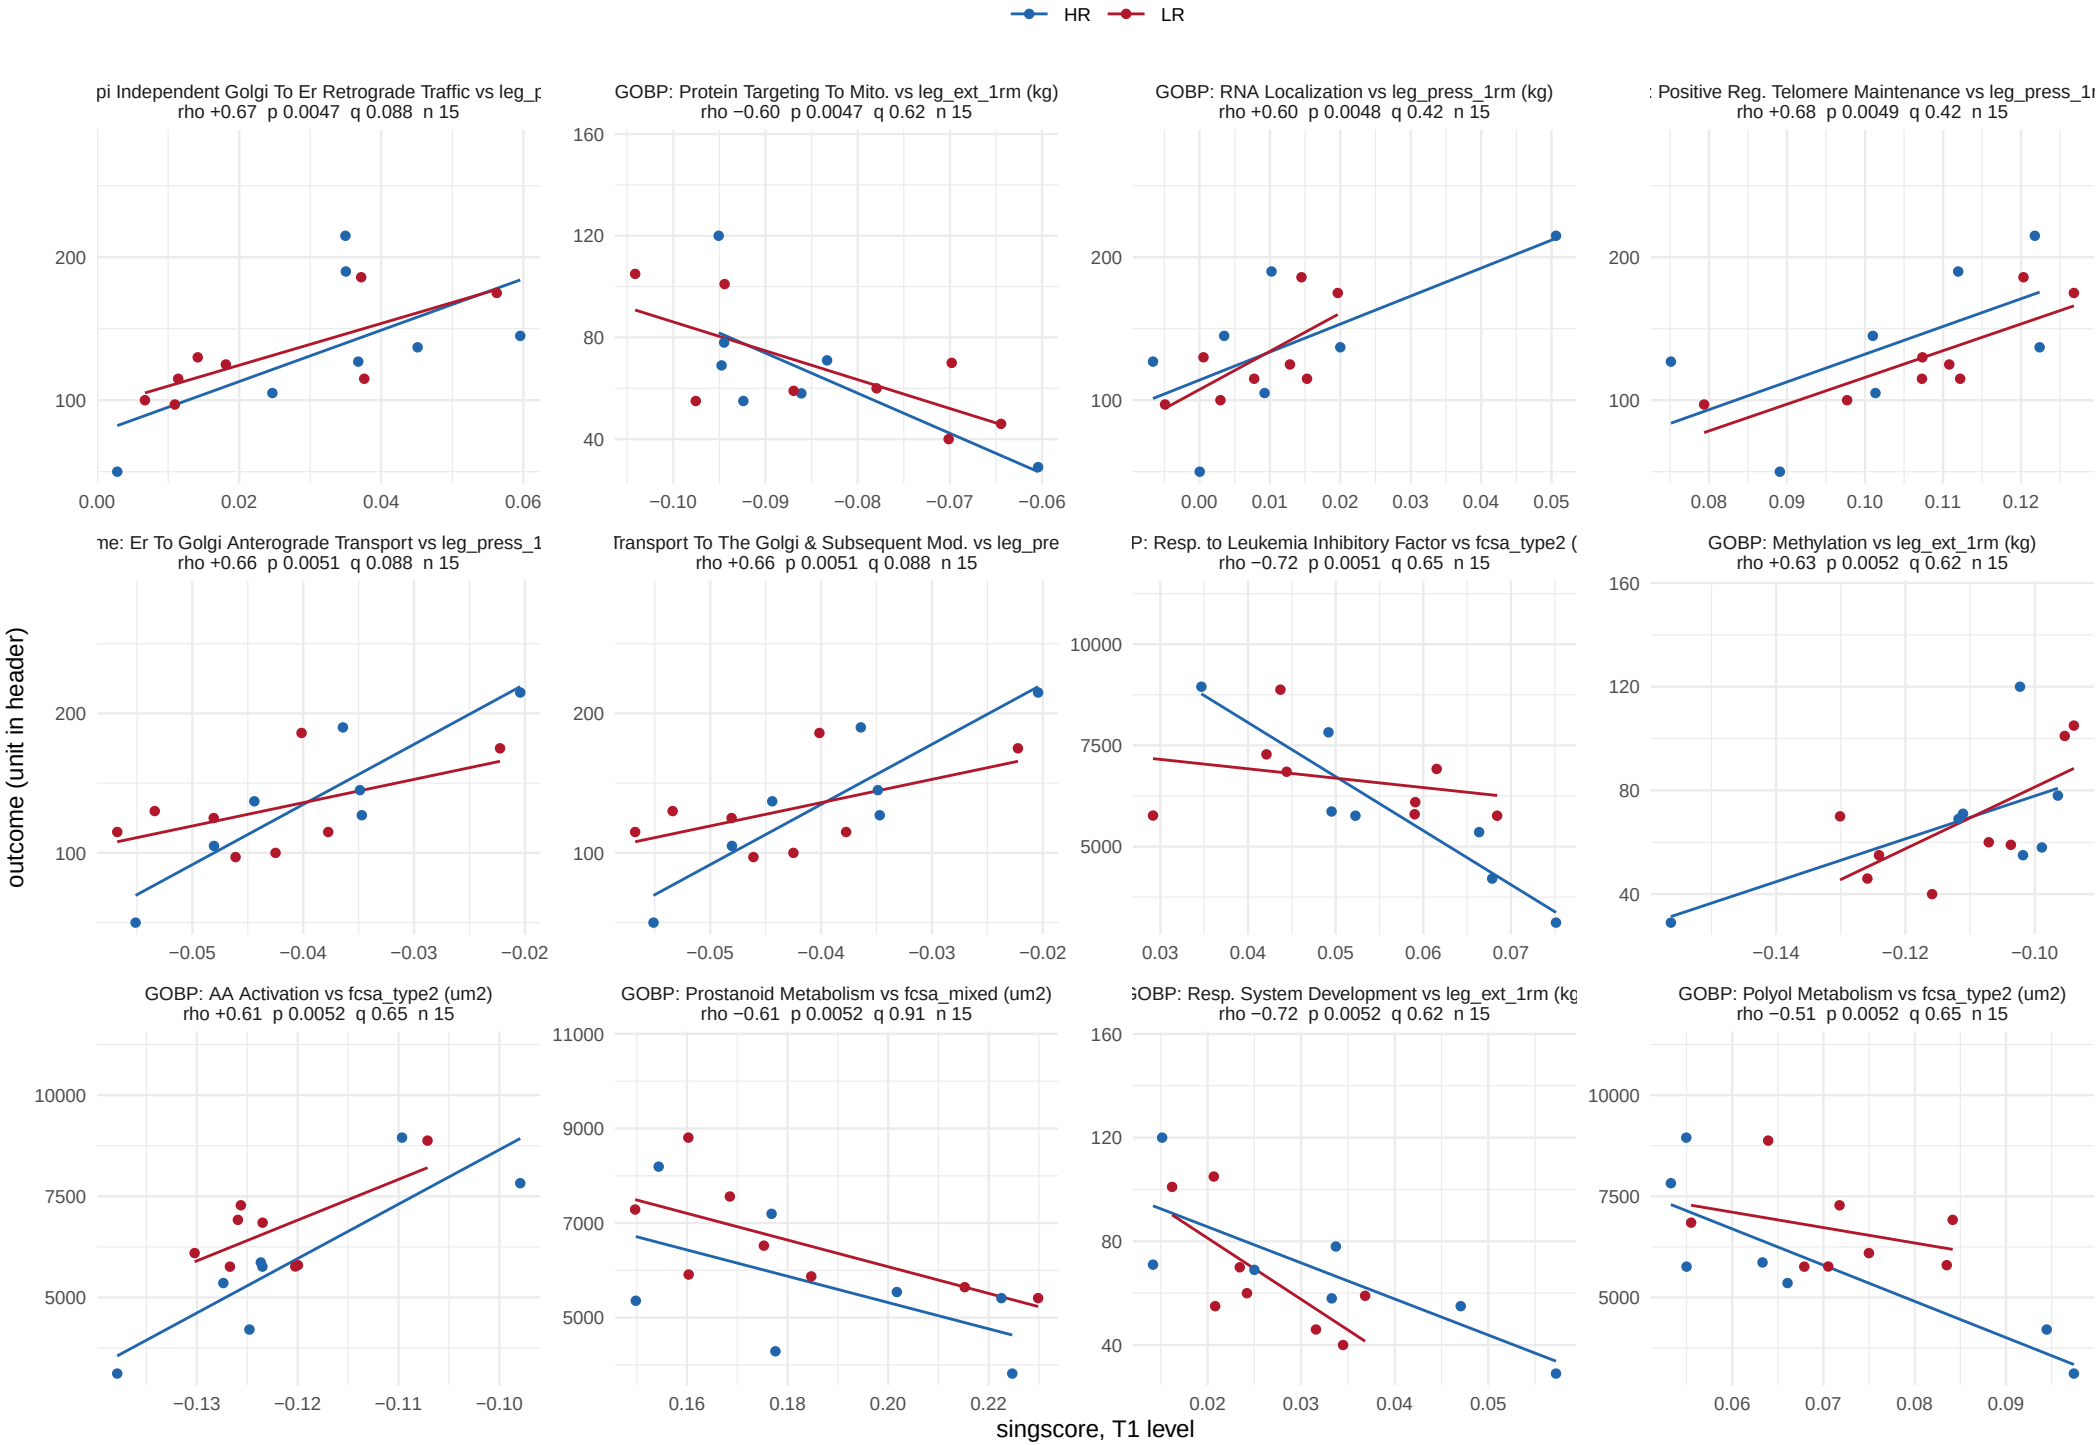

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


653 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 6 of 55.

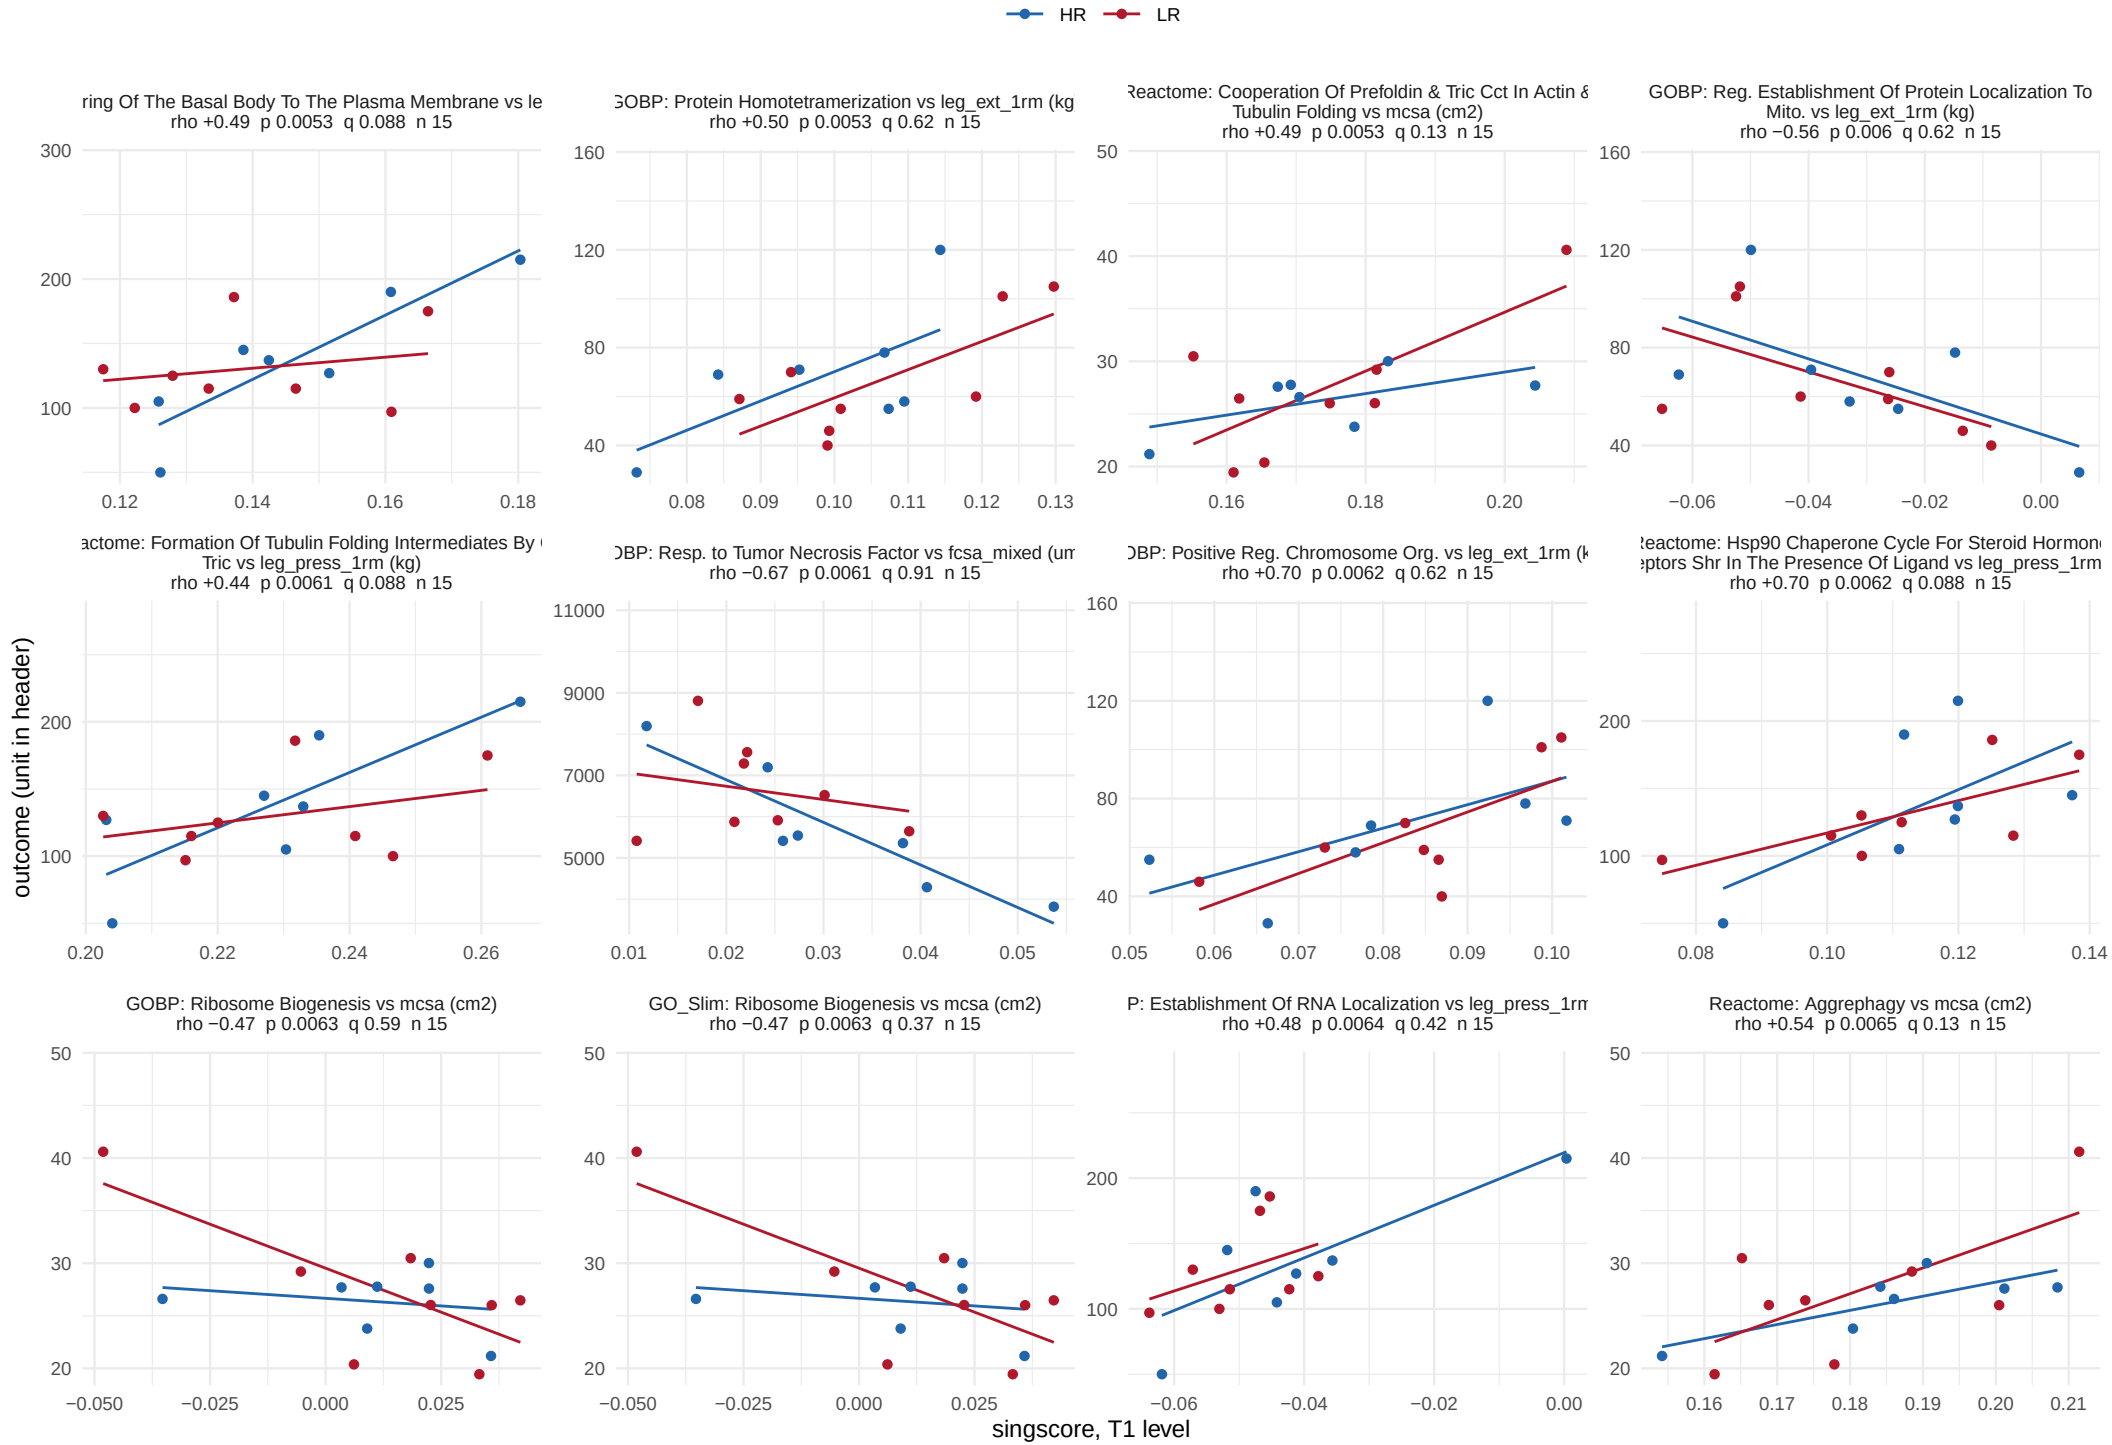

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


653 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 7 of 55.

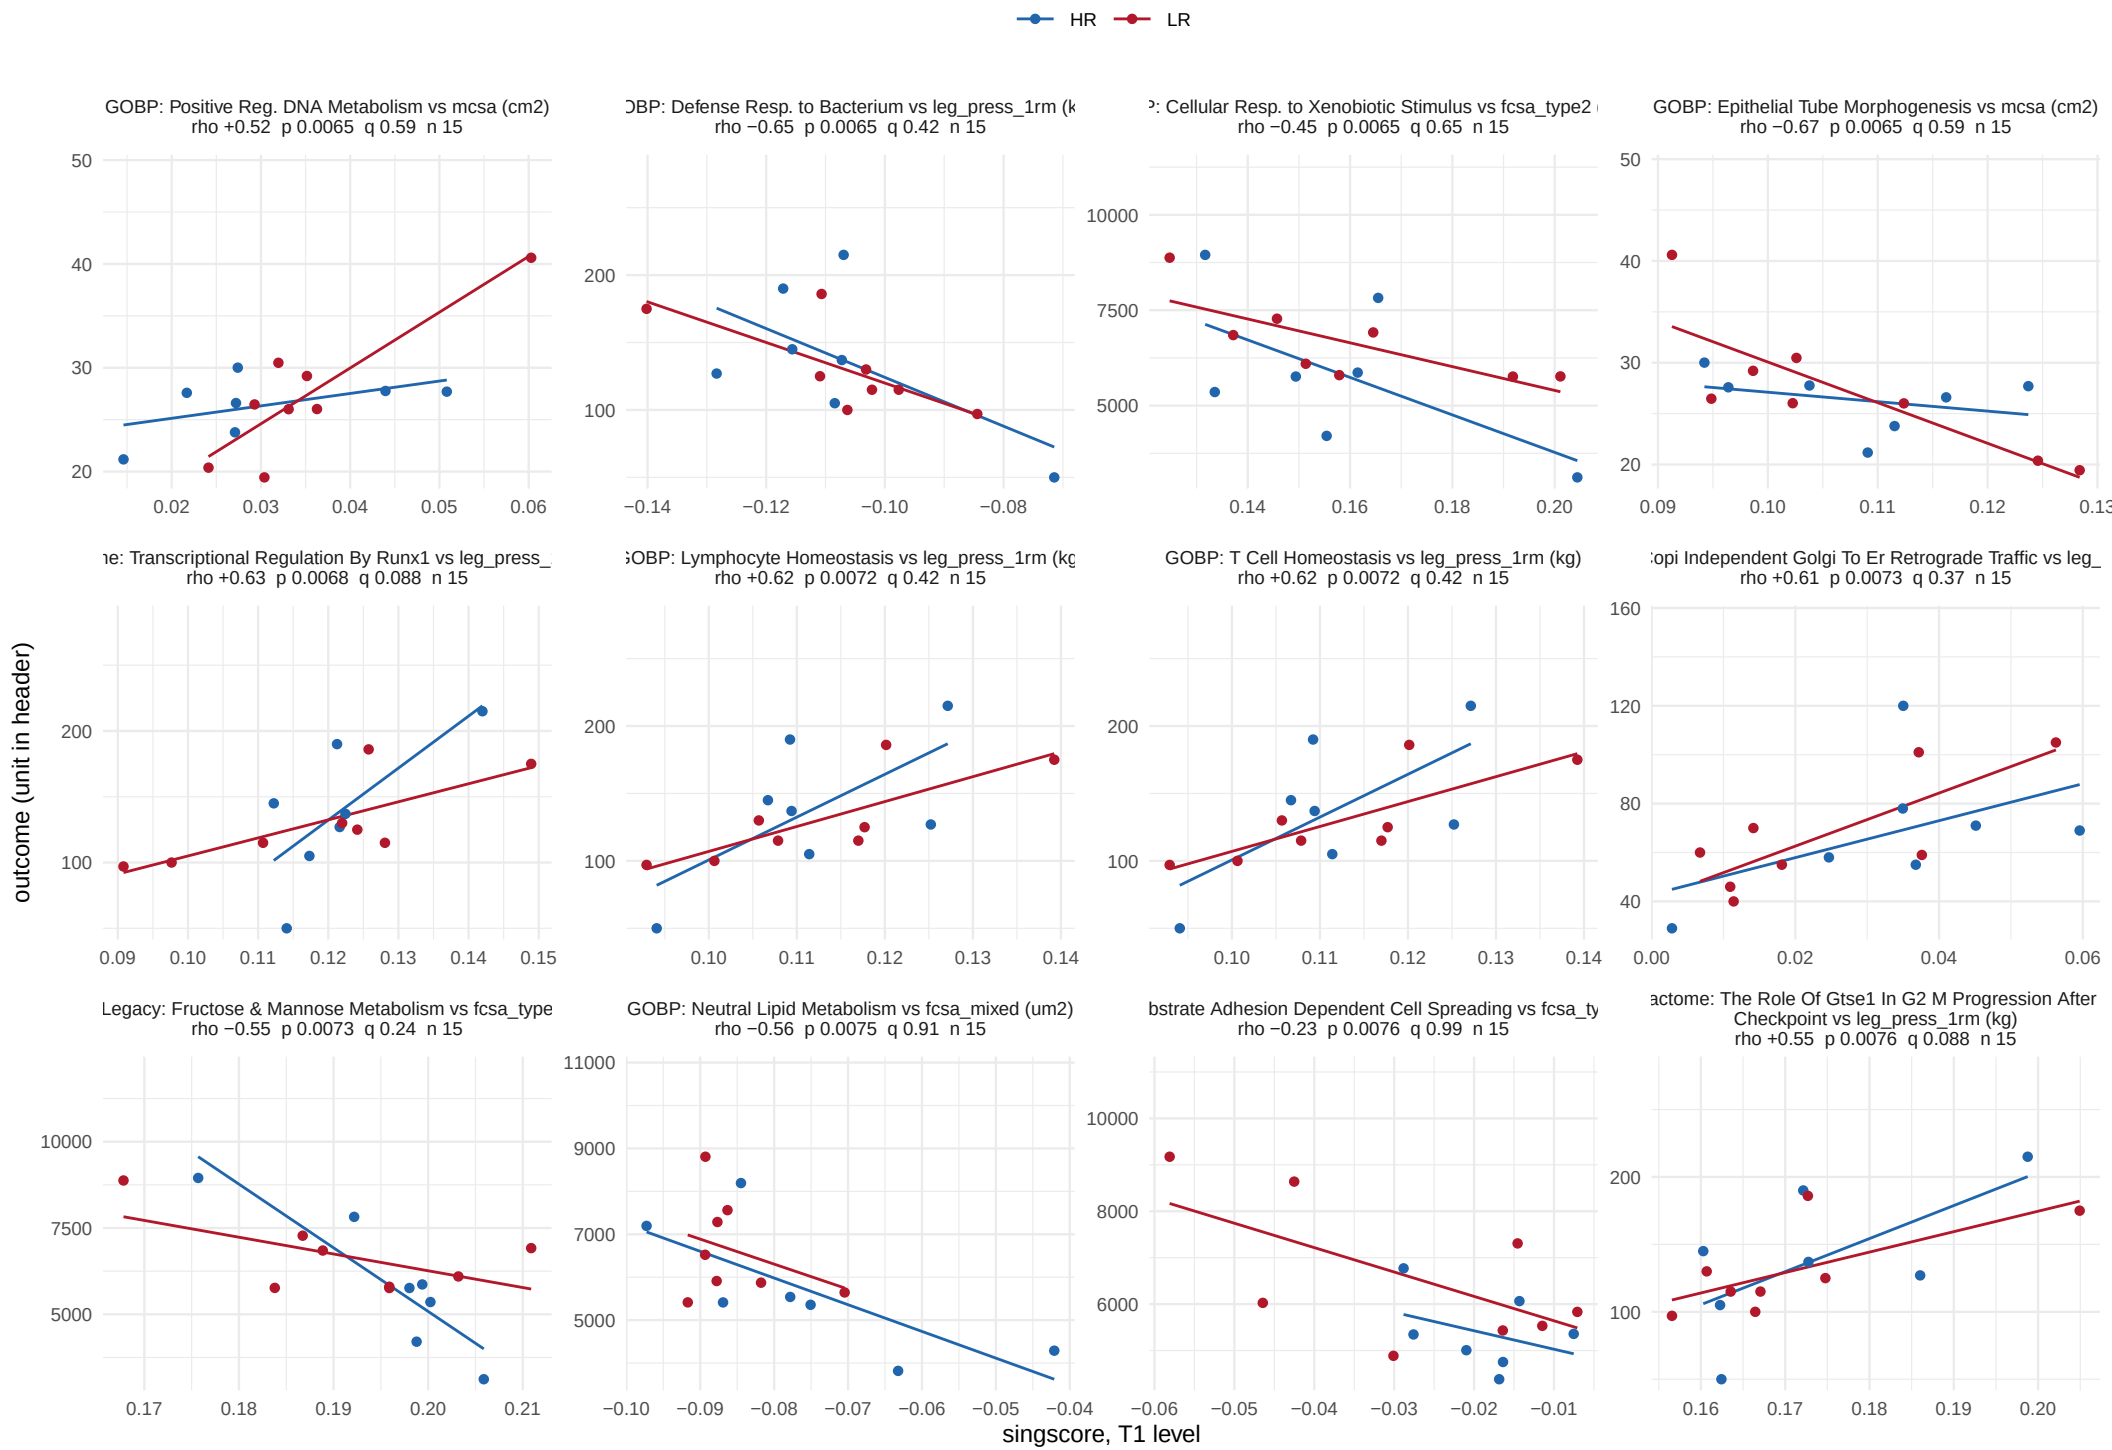

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


653 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 8 of 55.

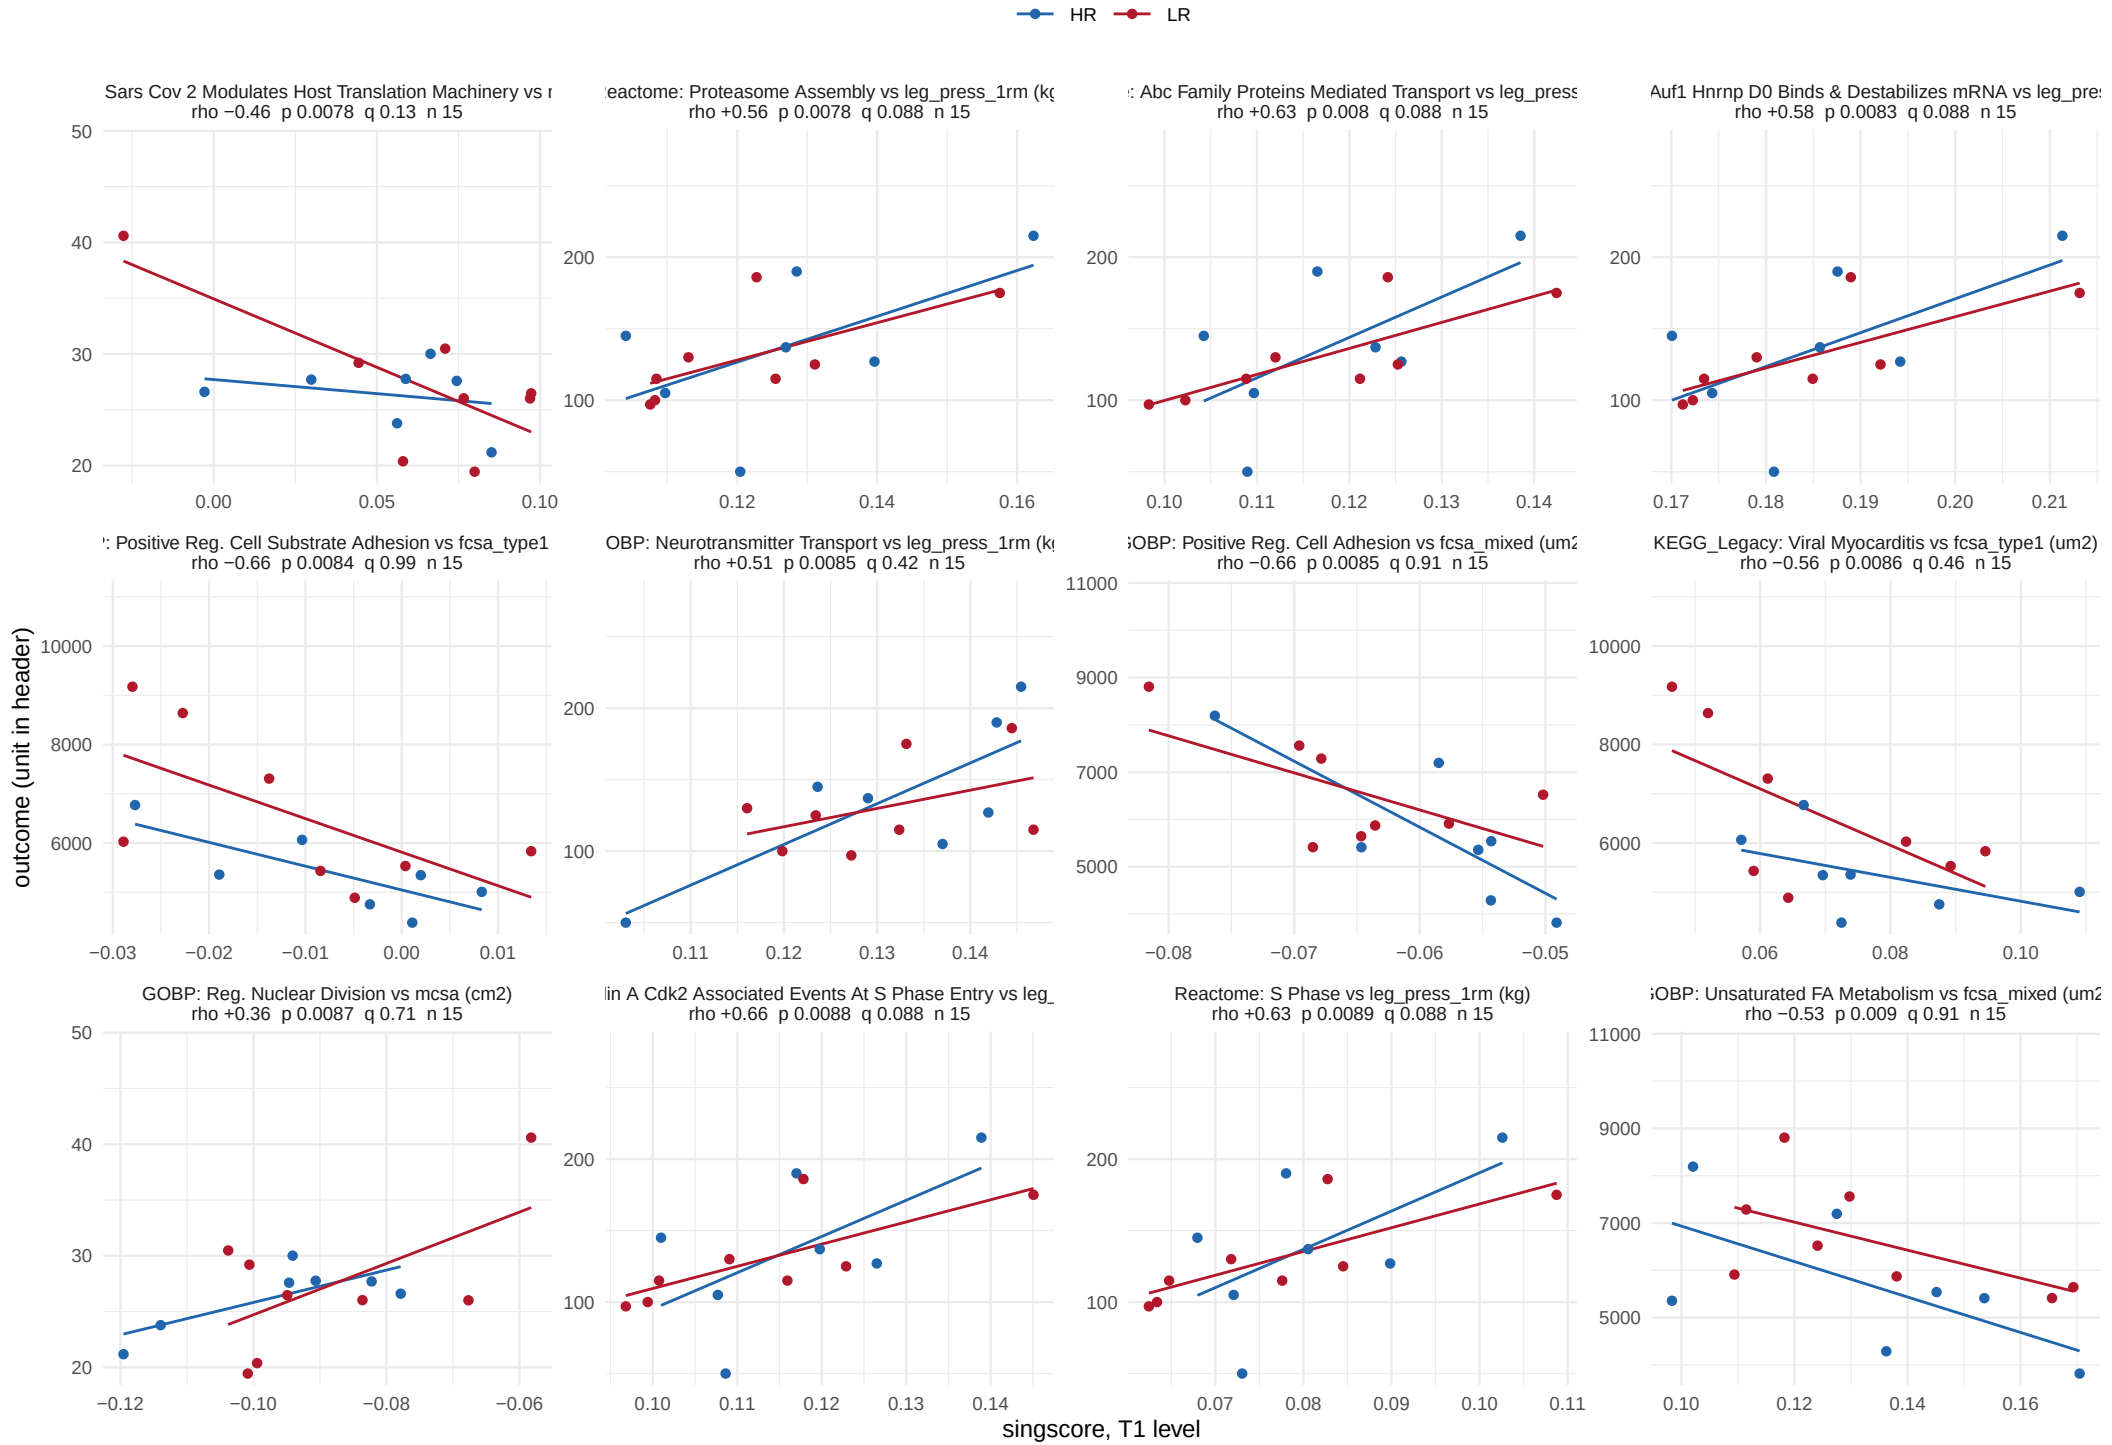

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


653 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 9 of 55.

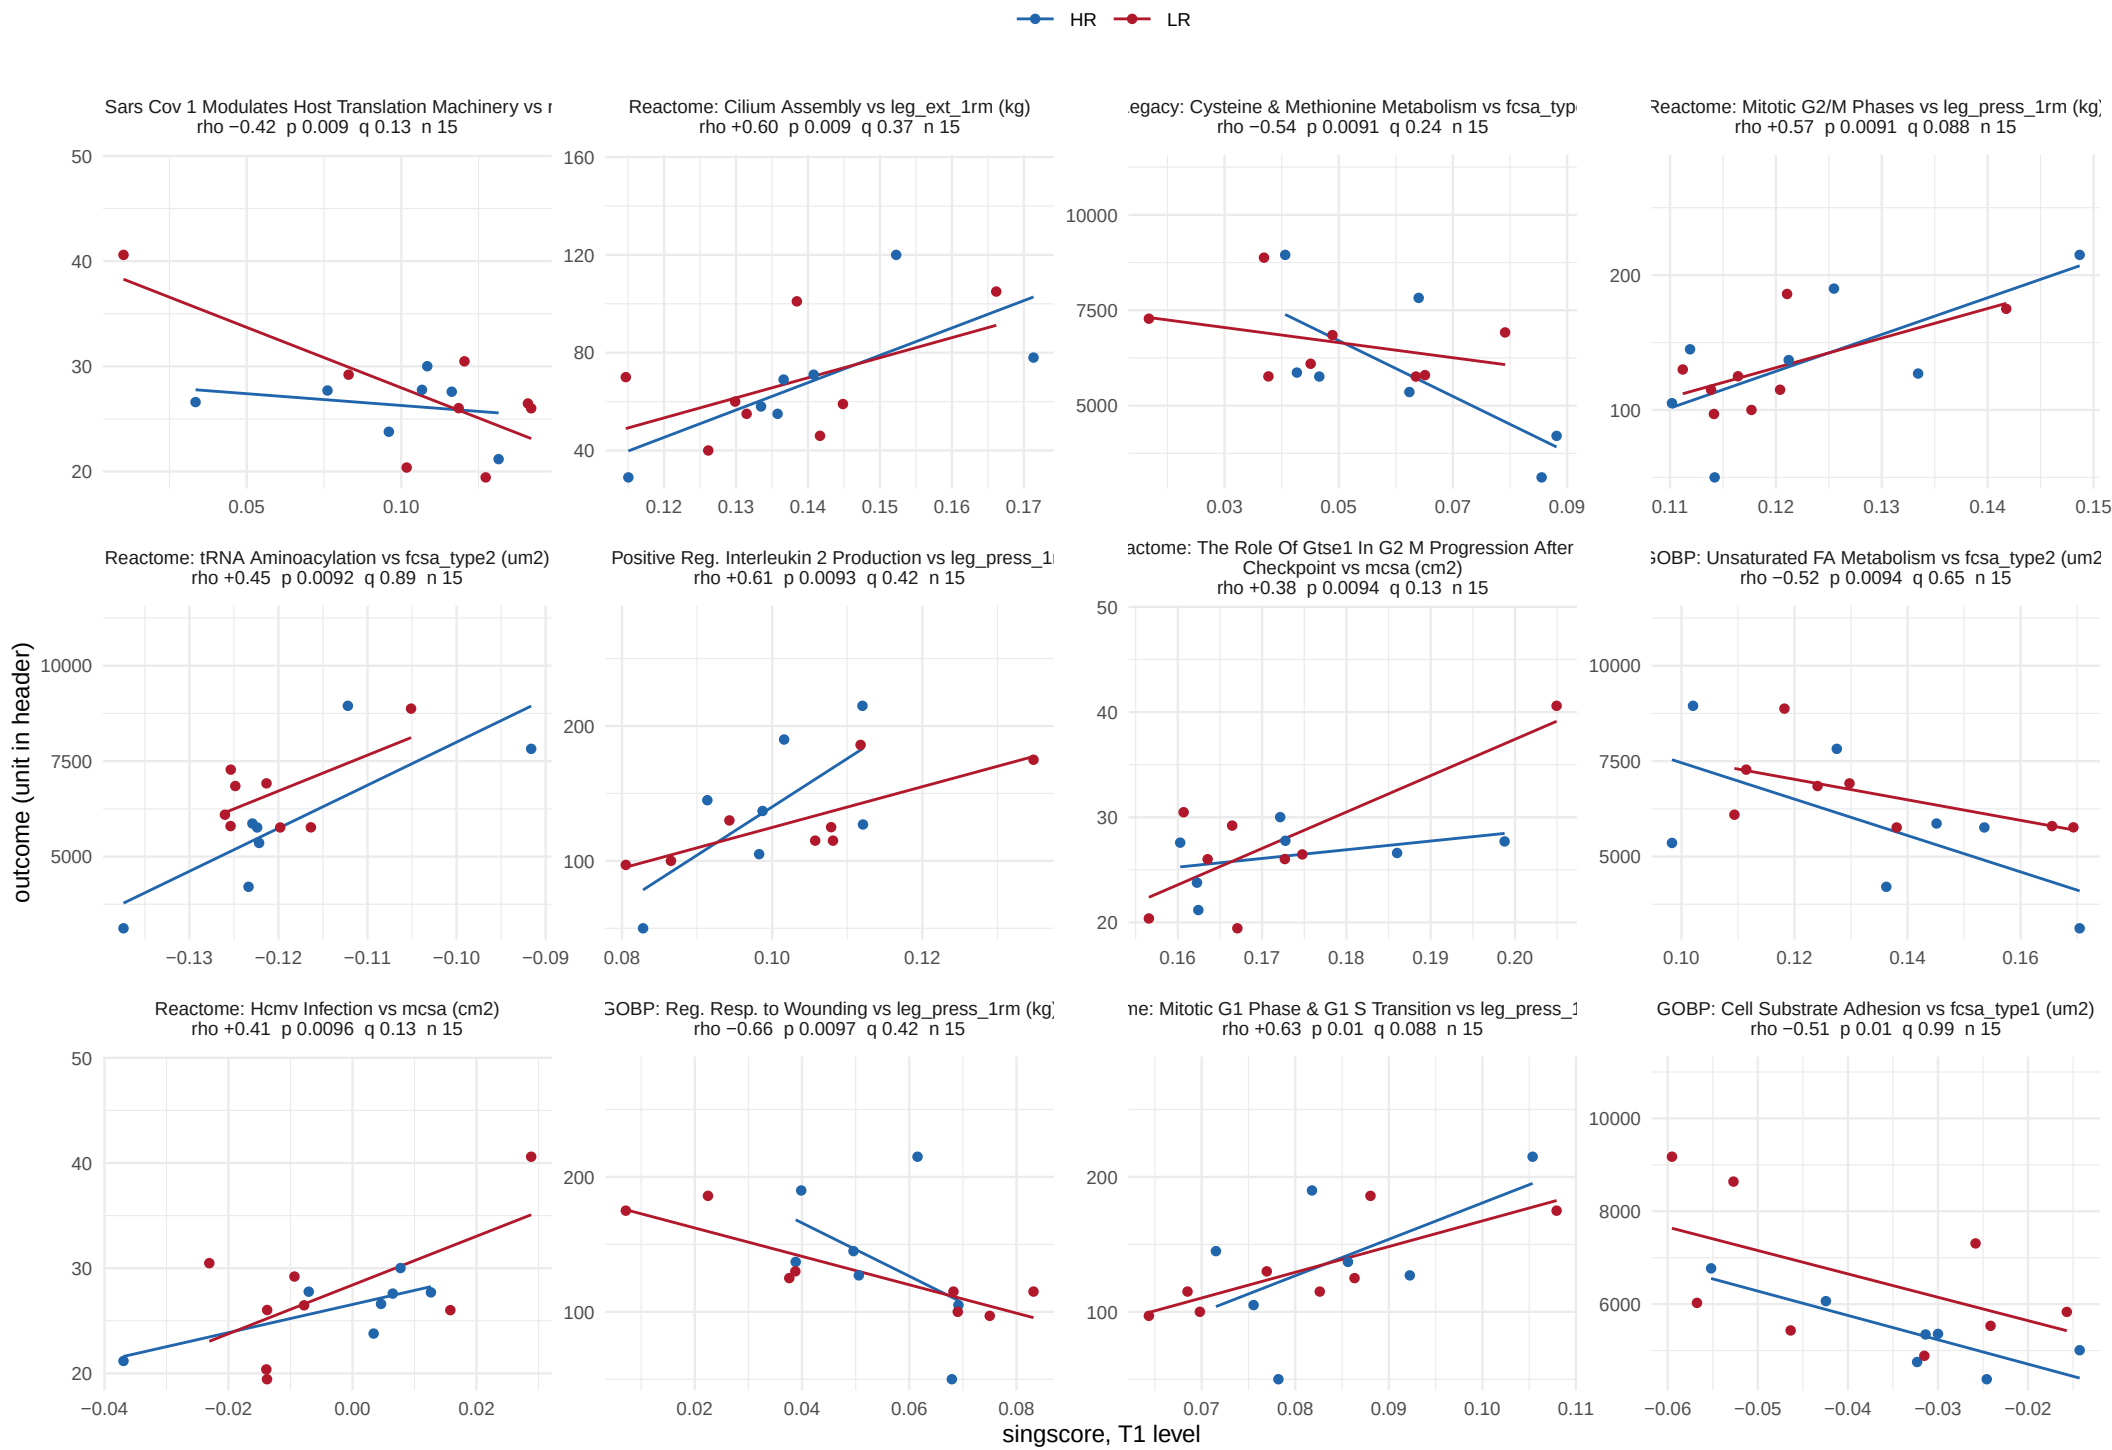

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


653 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 10 of 55.

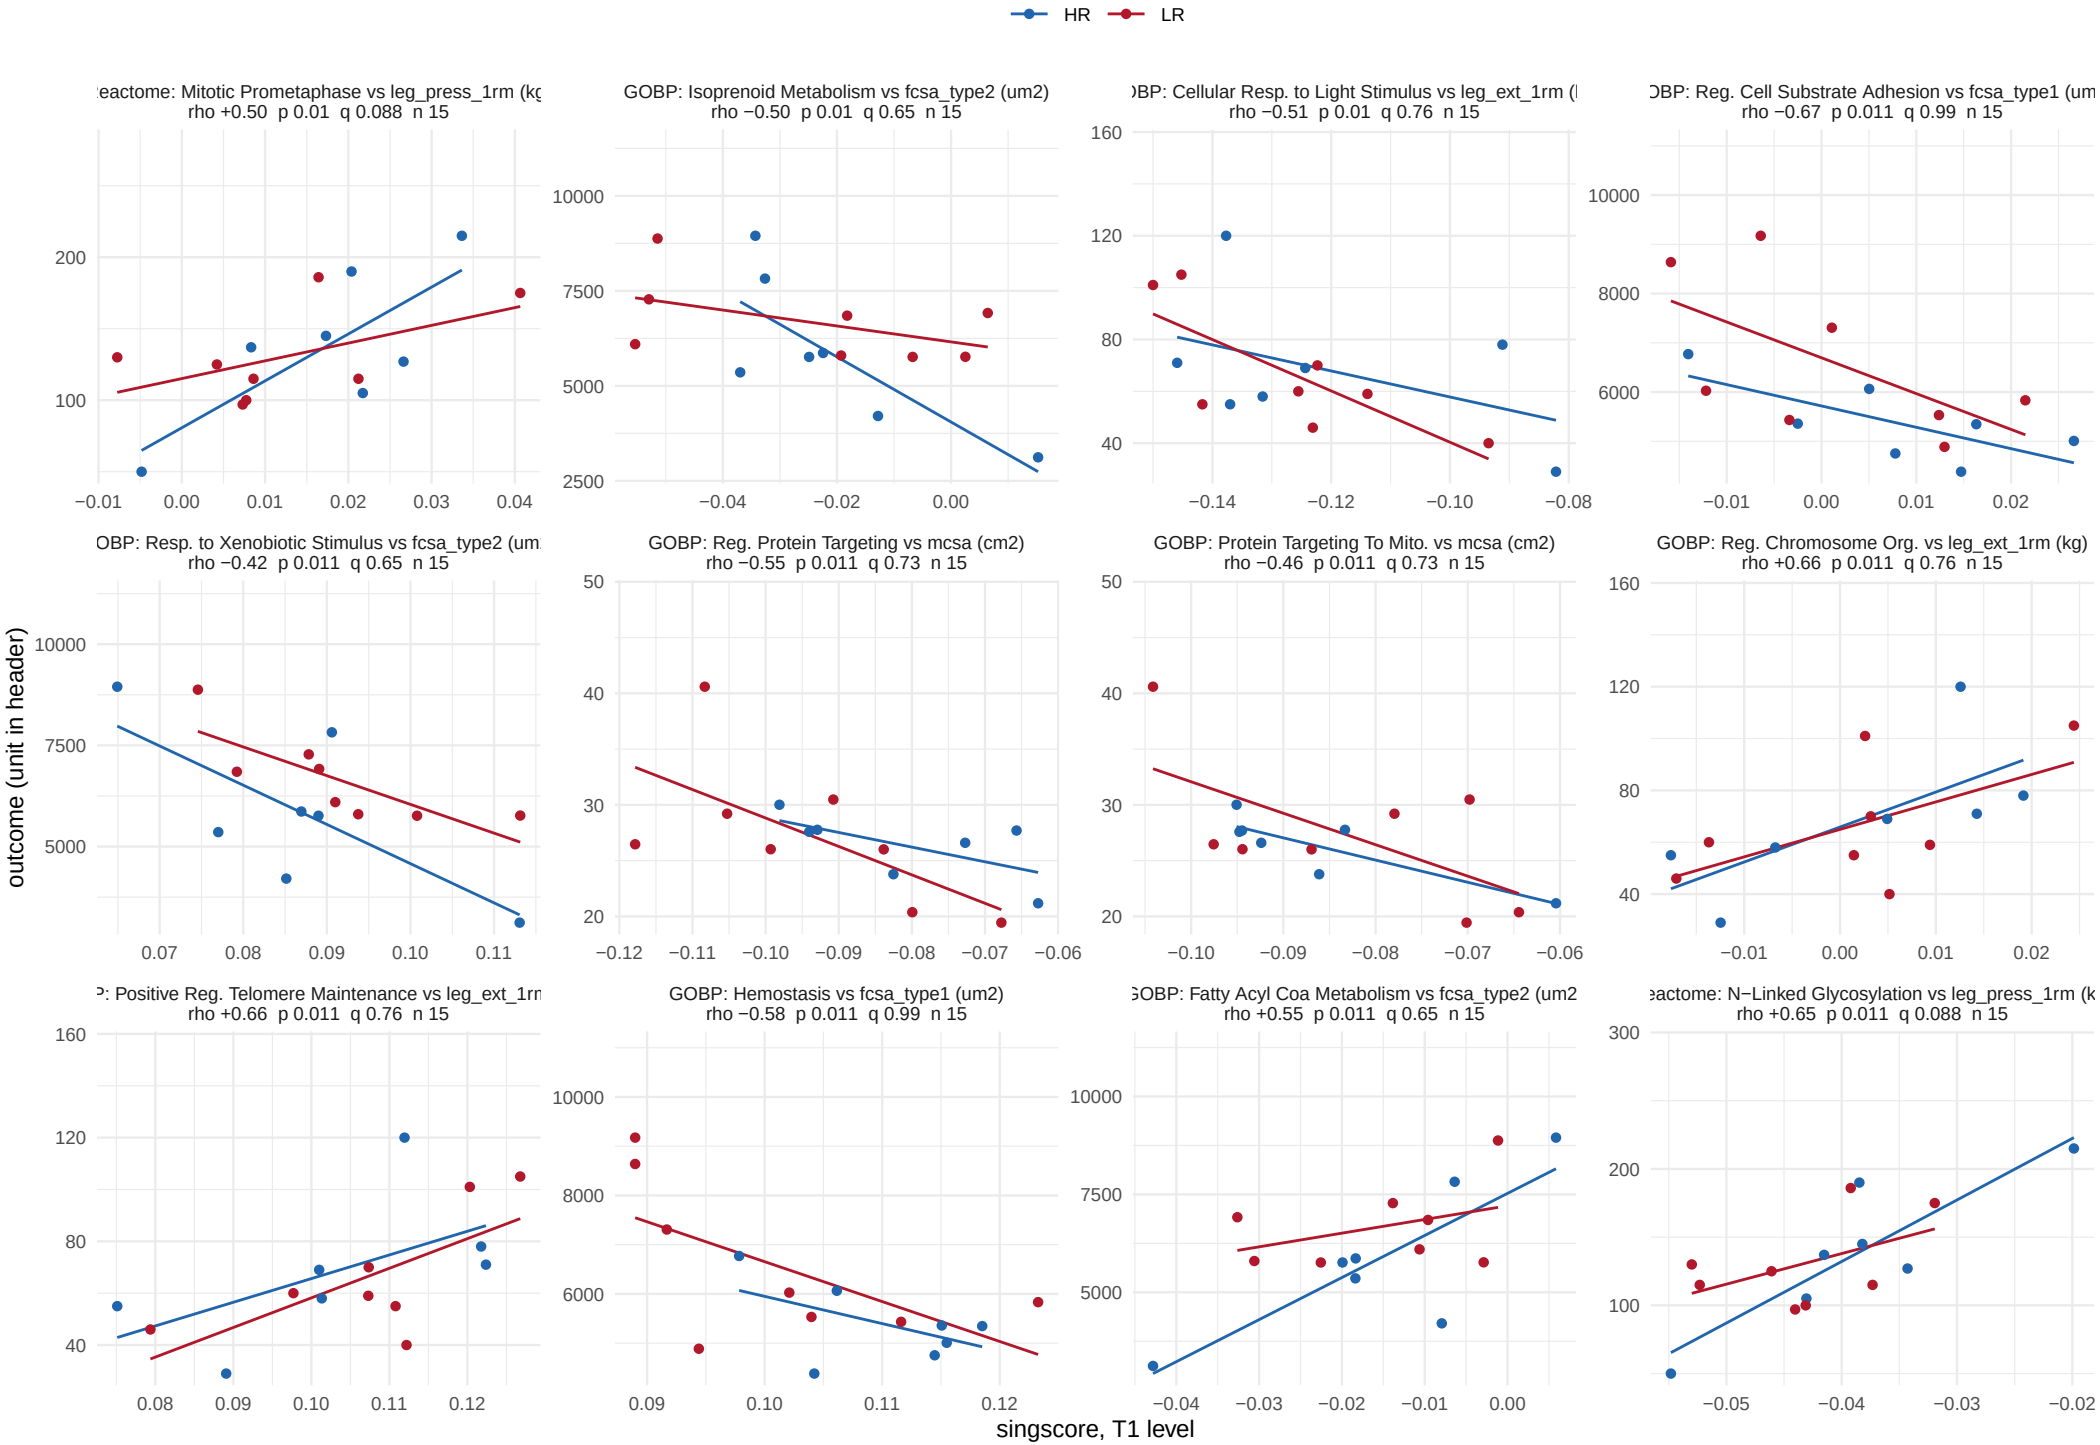

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


653 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 11 of 55.

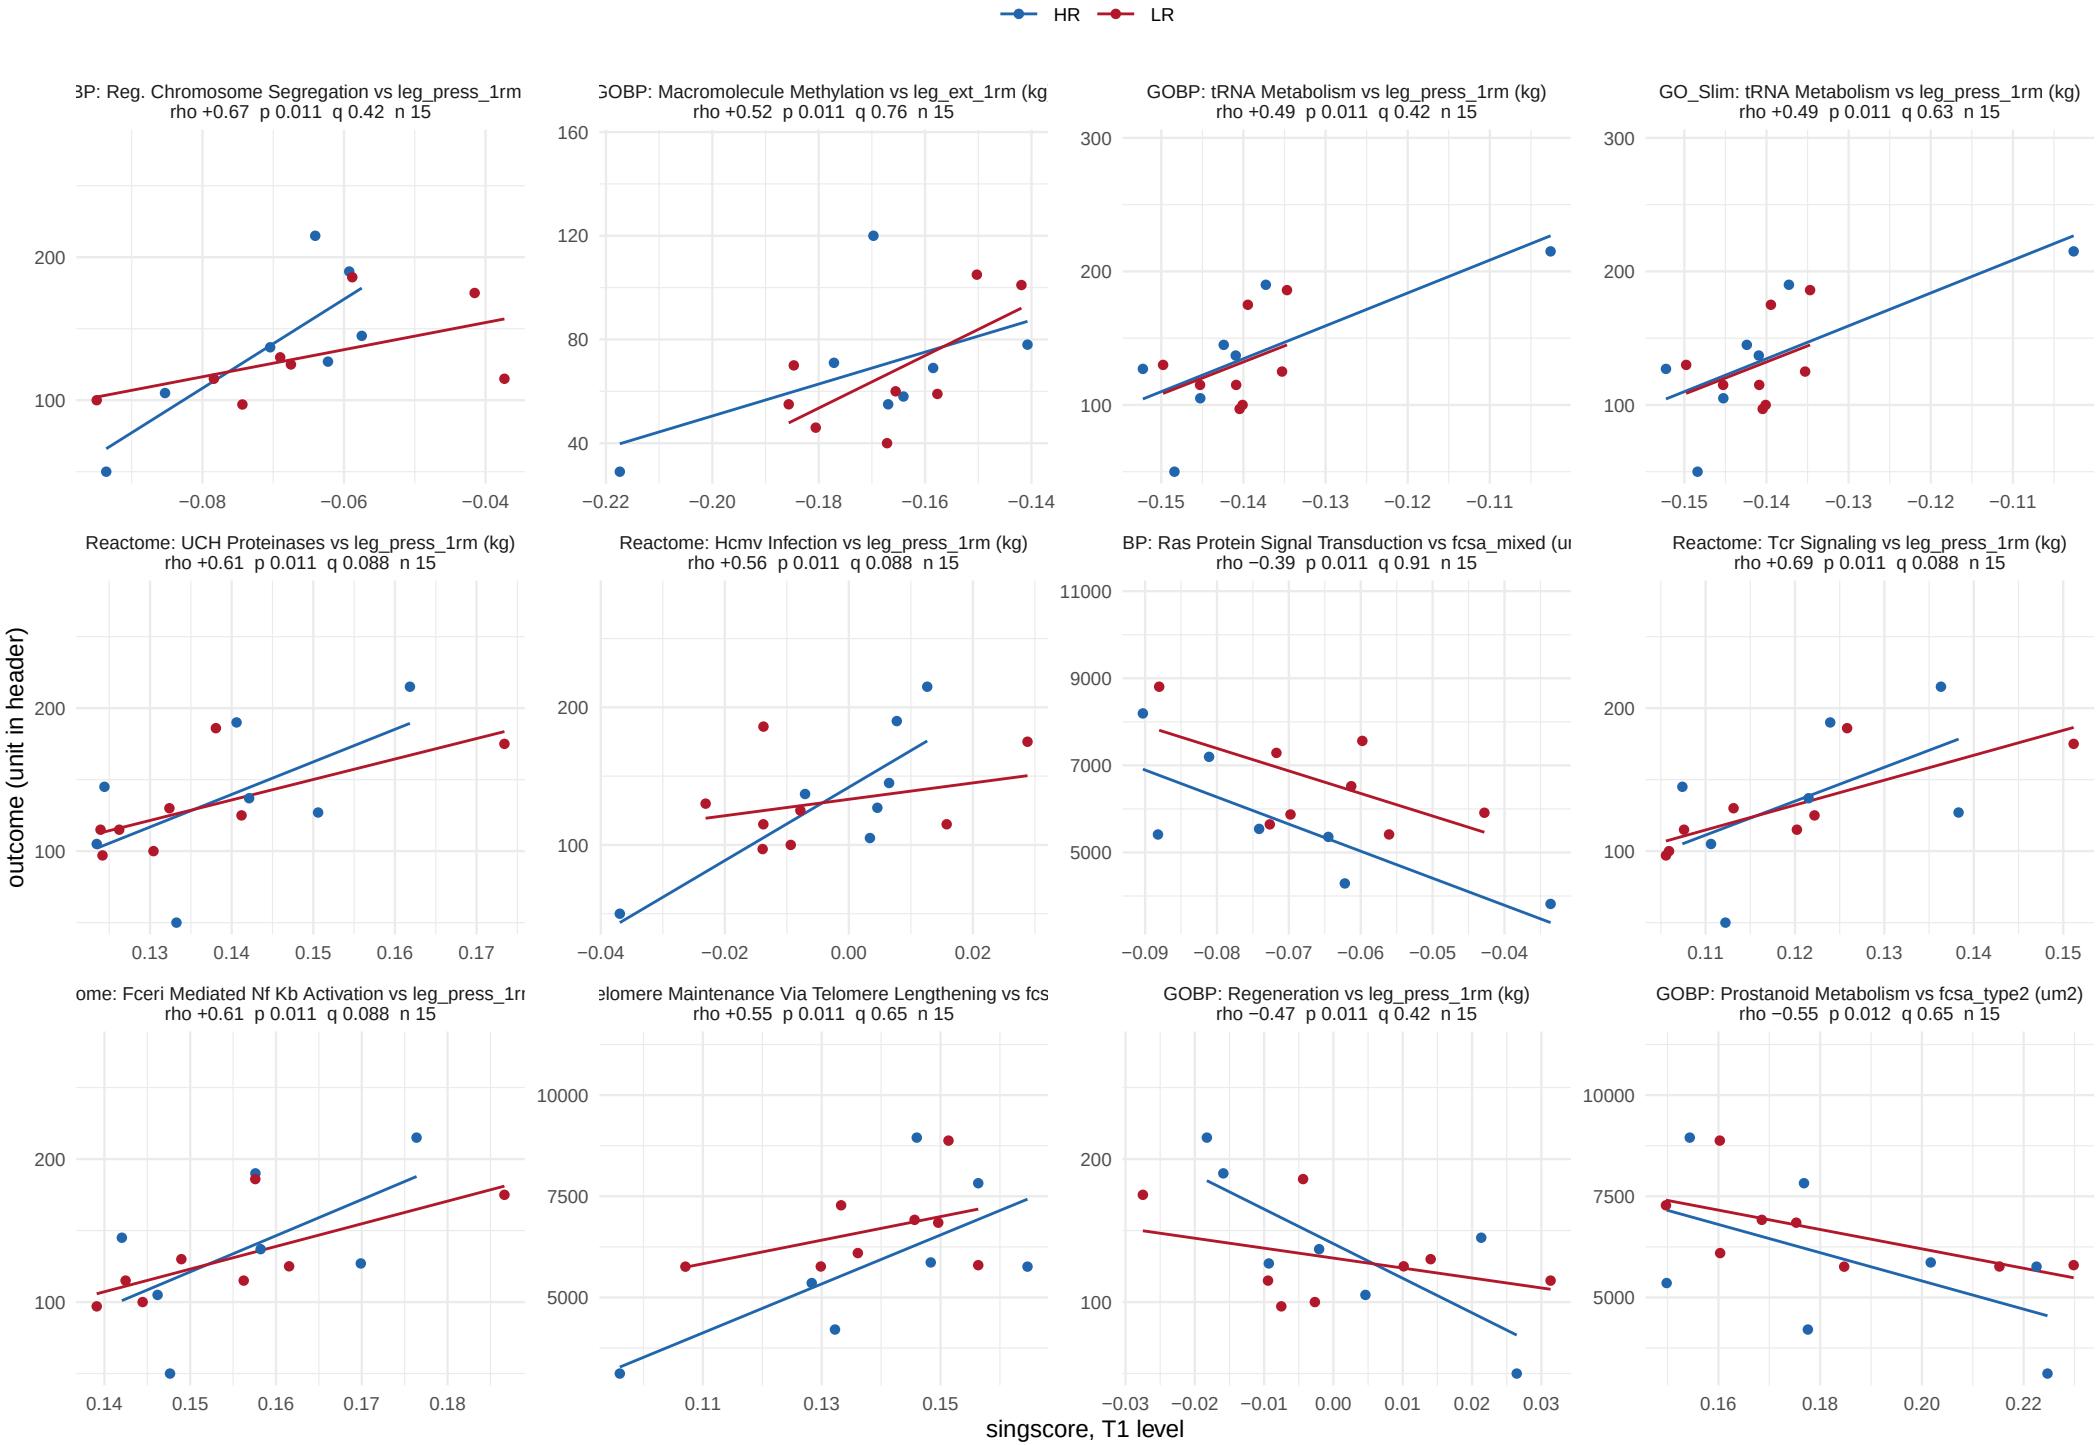

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


653 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 12 of 55.

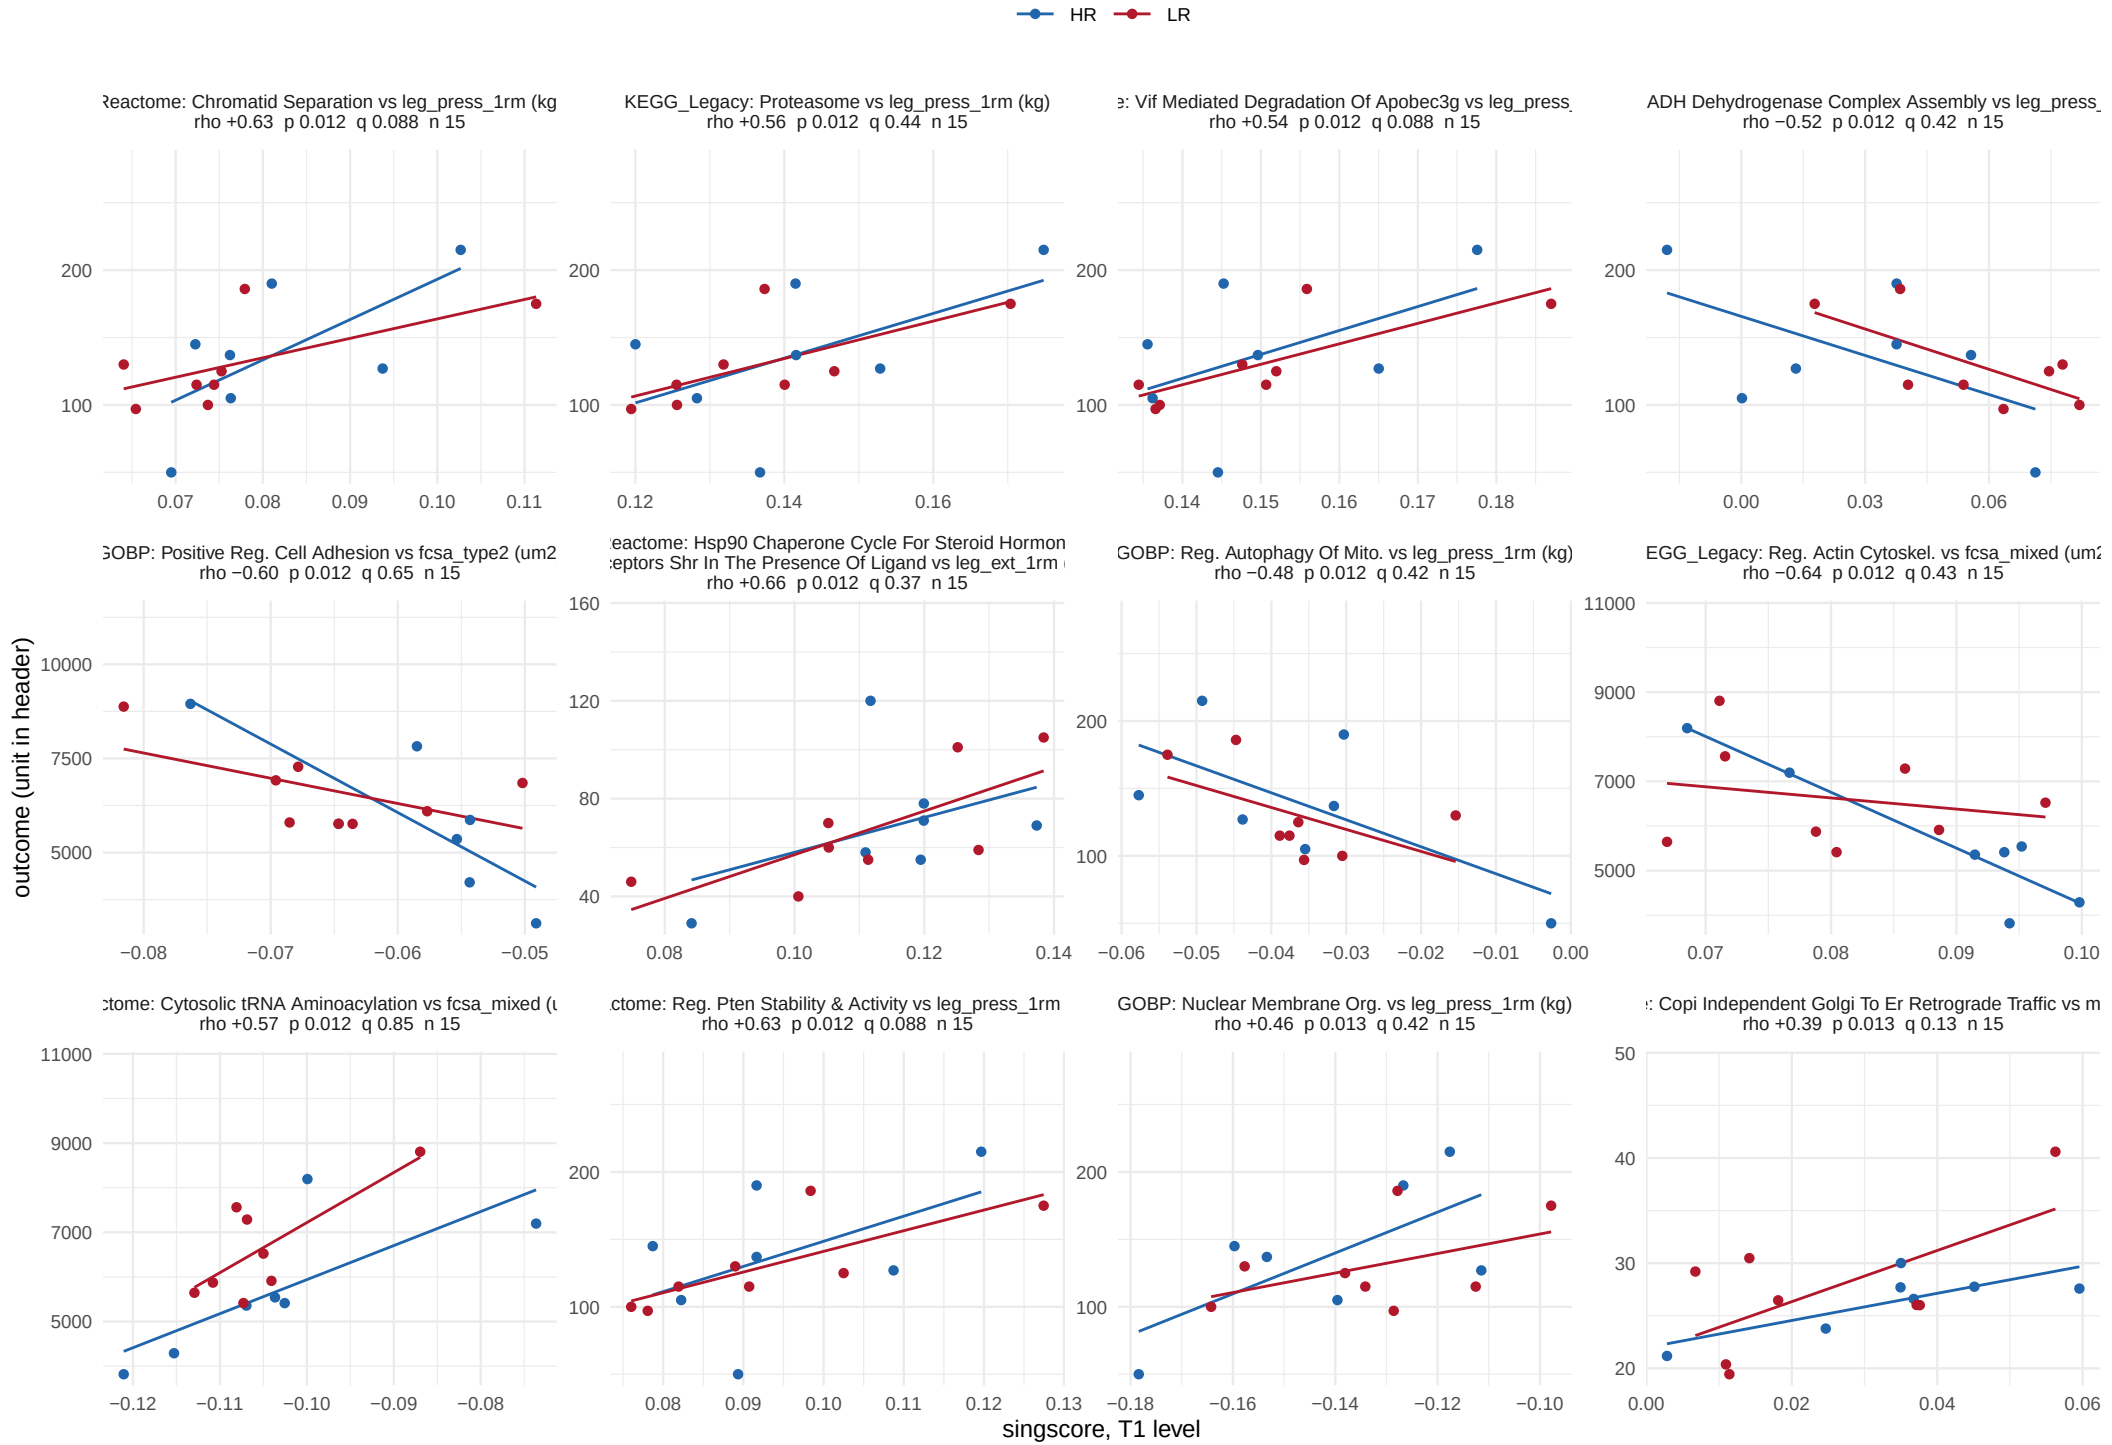

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


653 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 13 of 55.

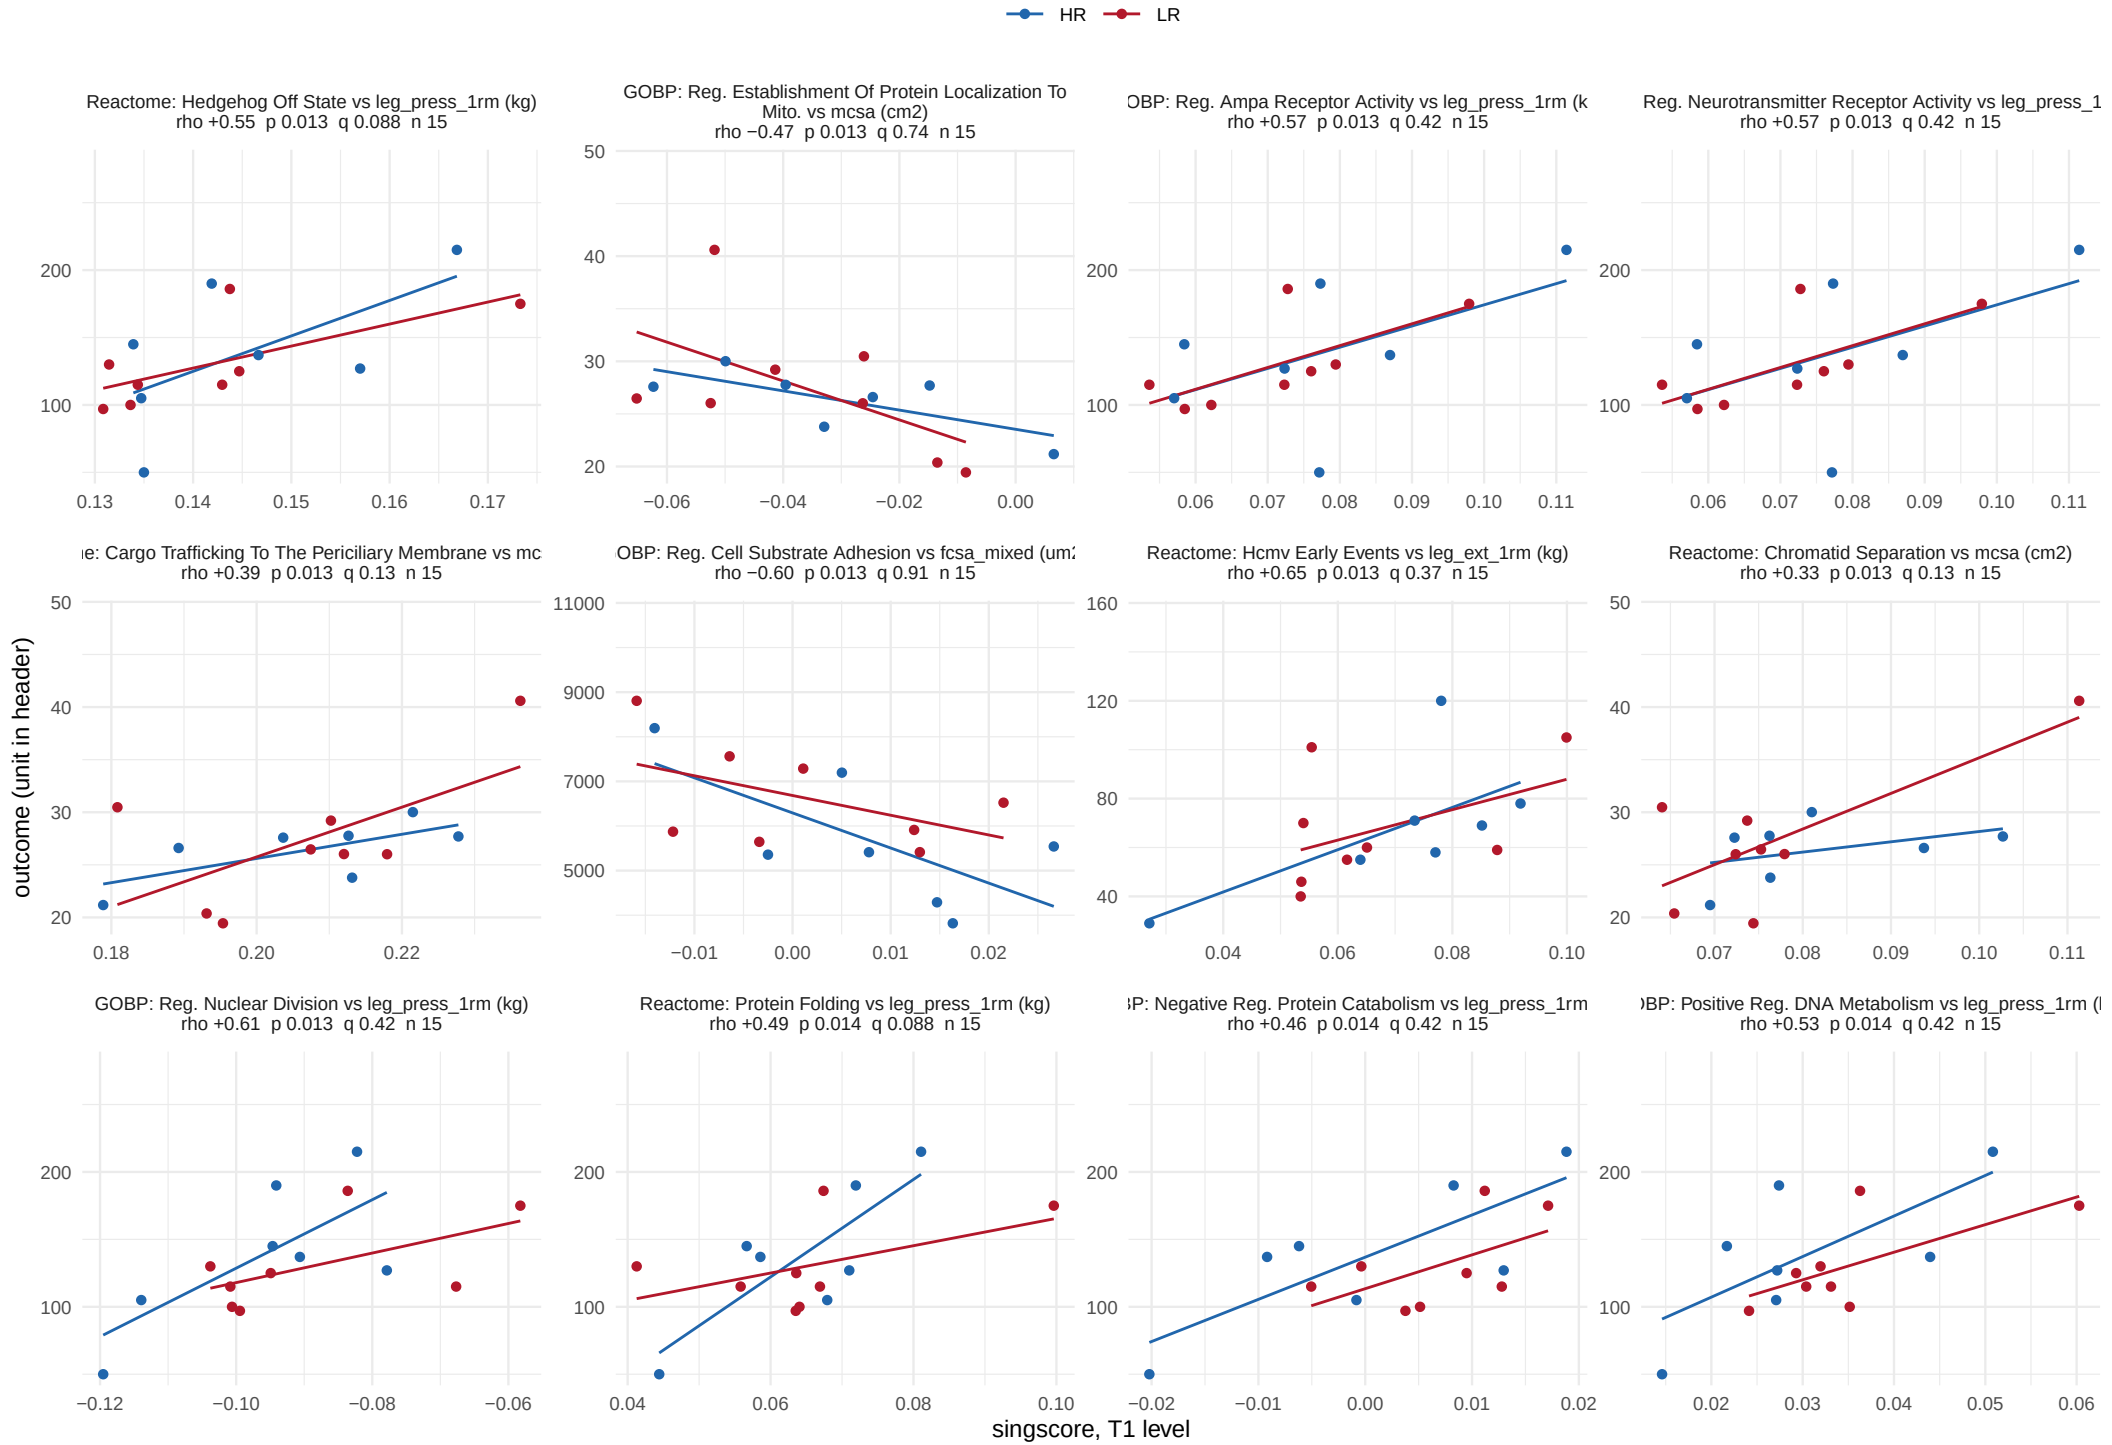

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


653 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 14 of 55.

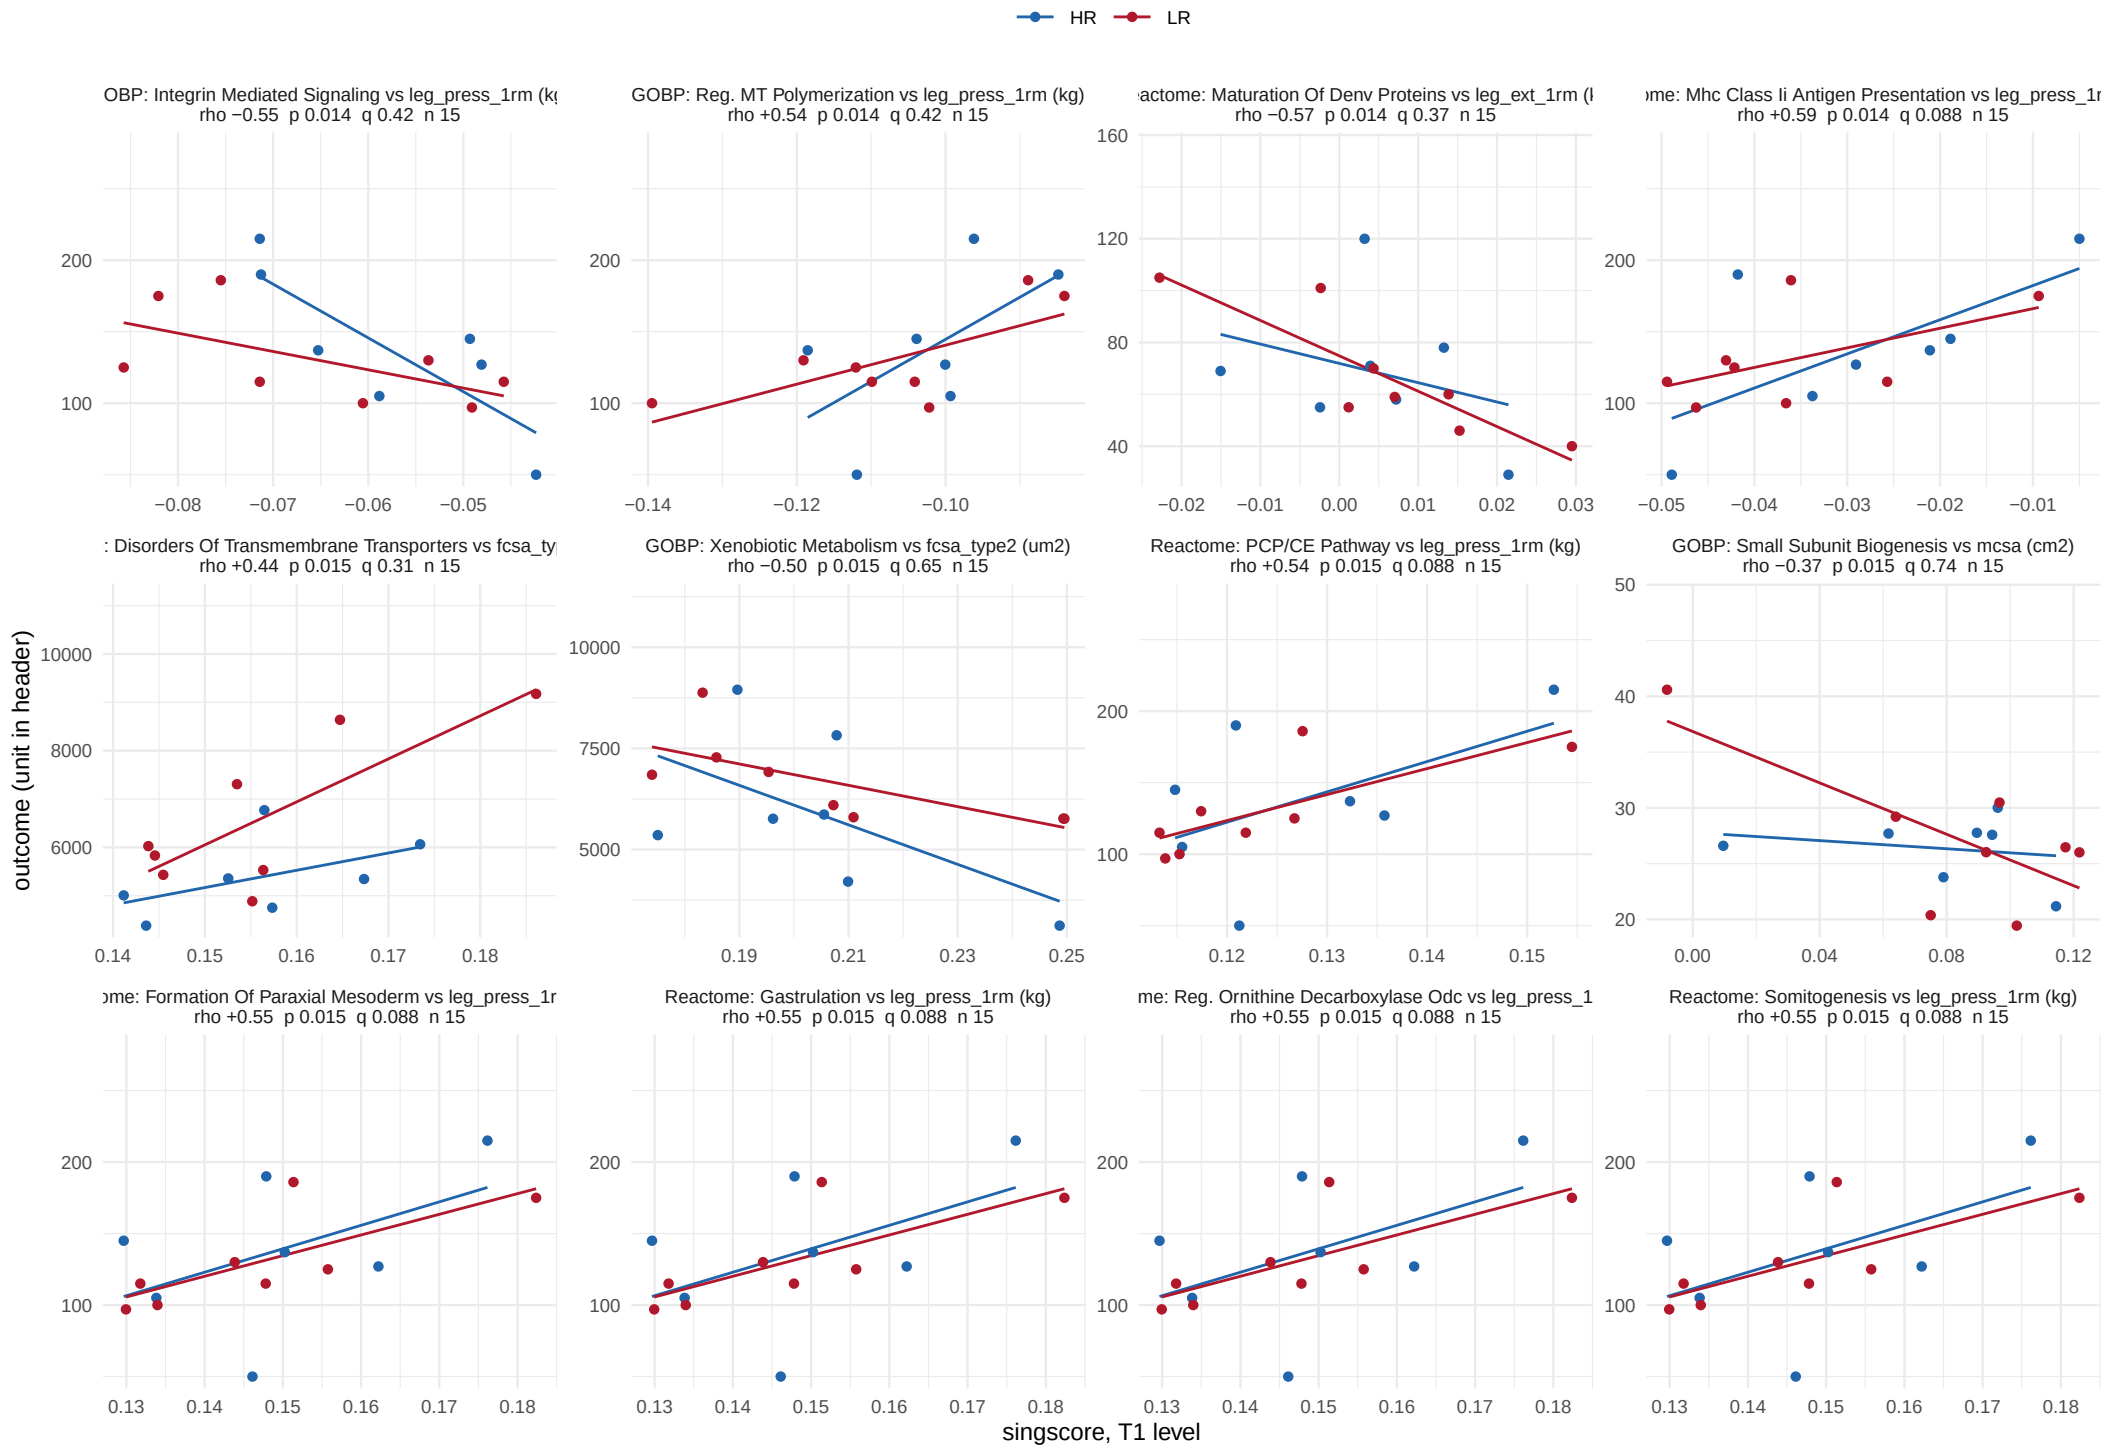

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


653 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 15 of 55.

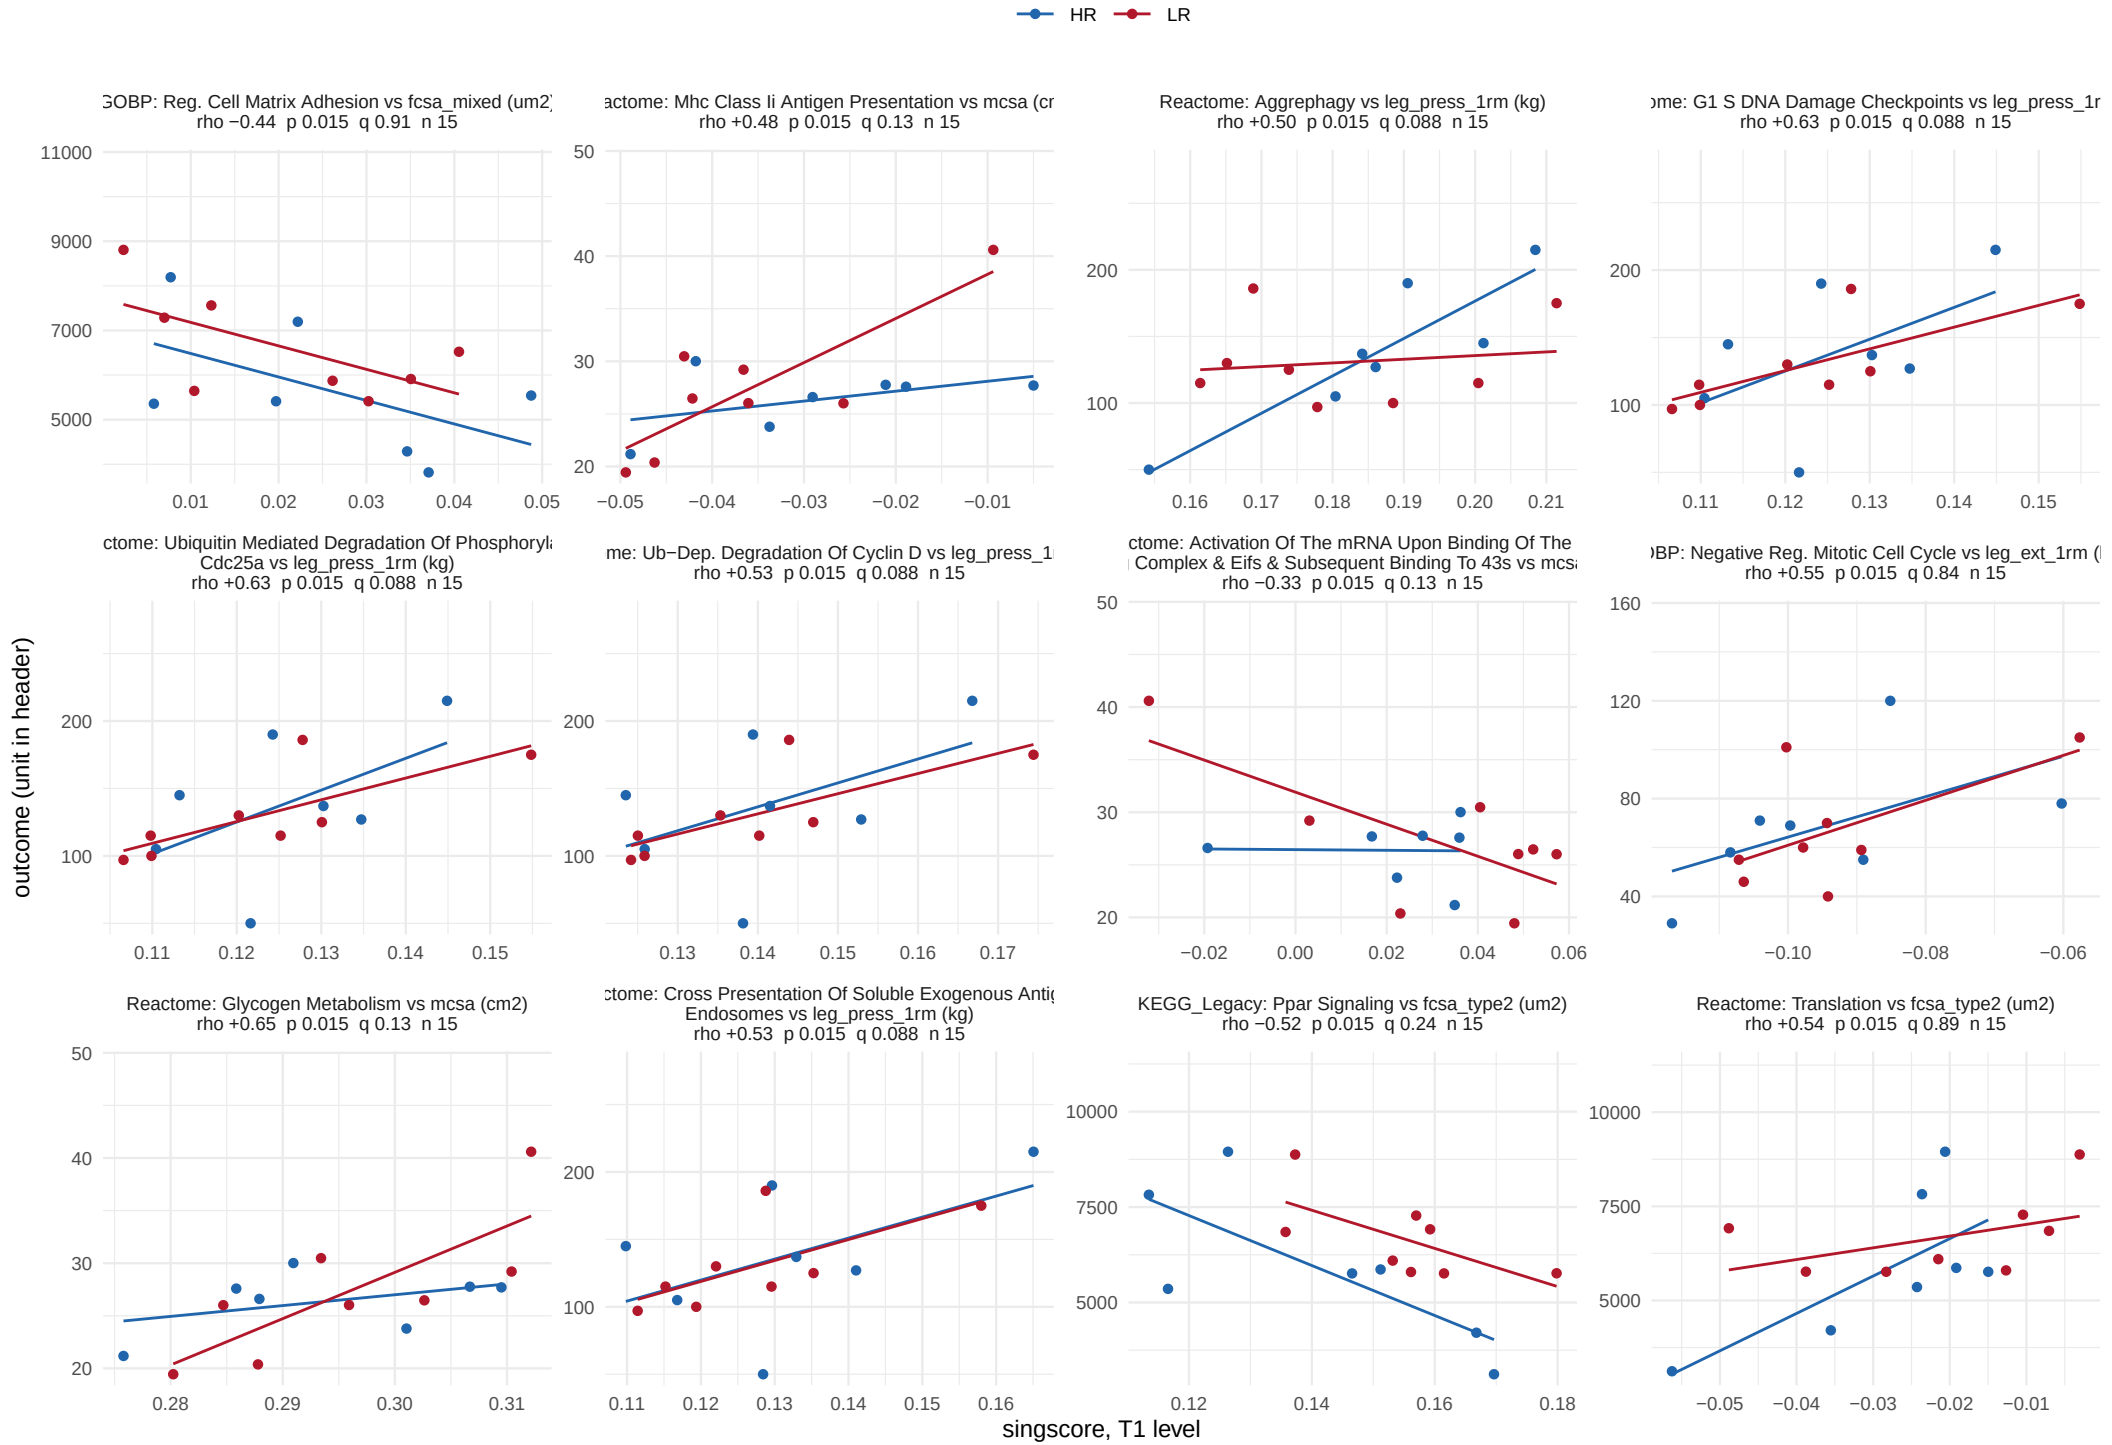

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


653 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 16 of 55.

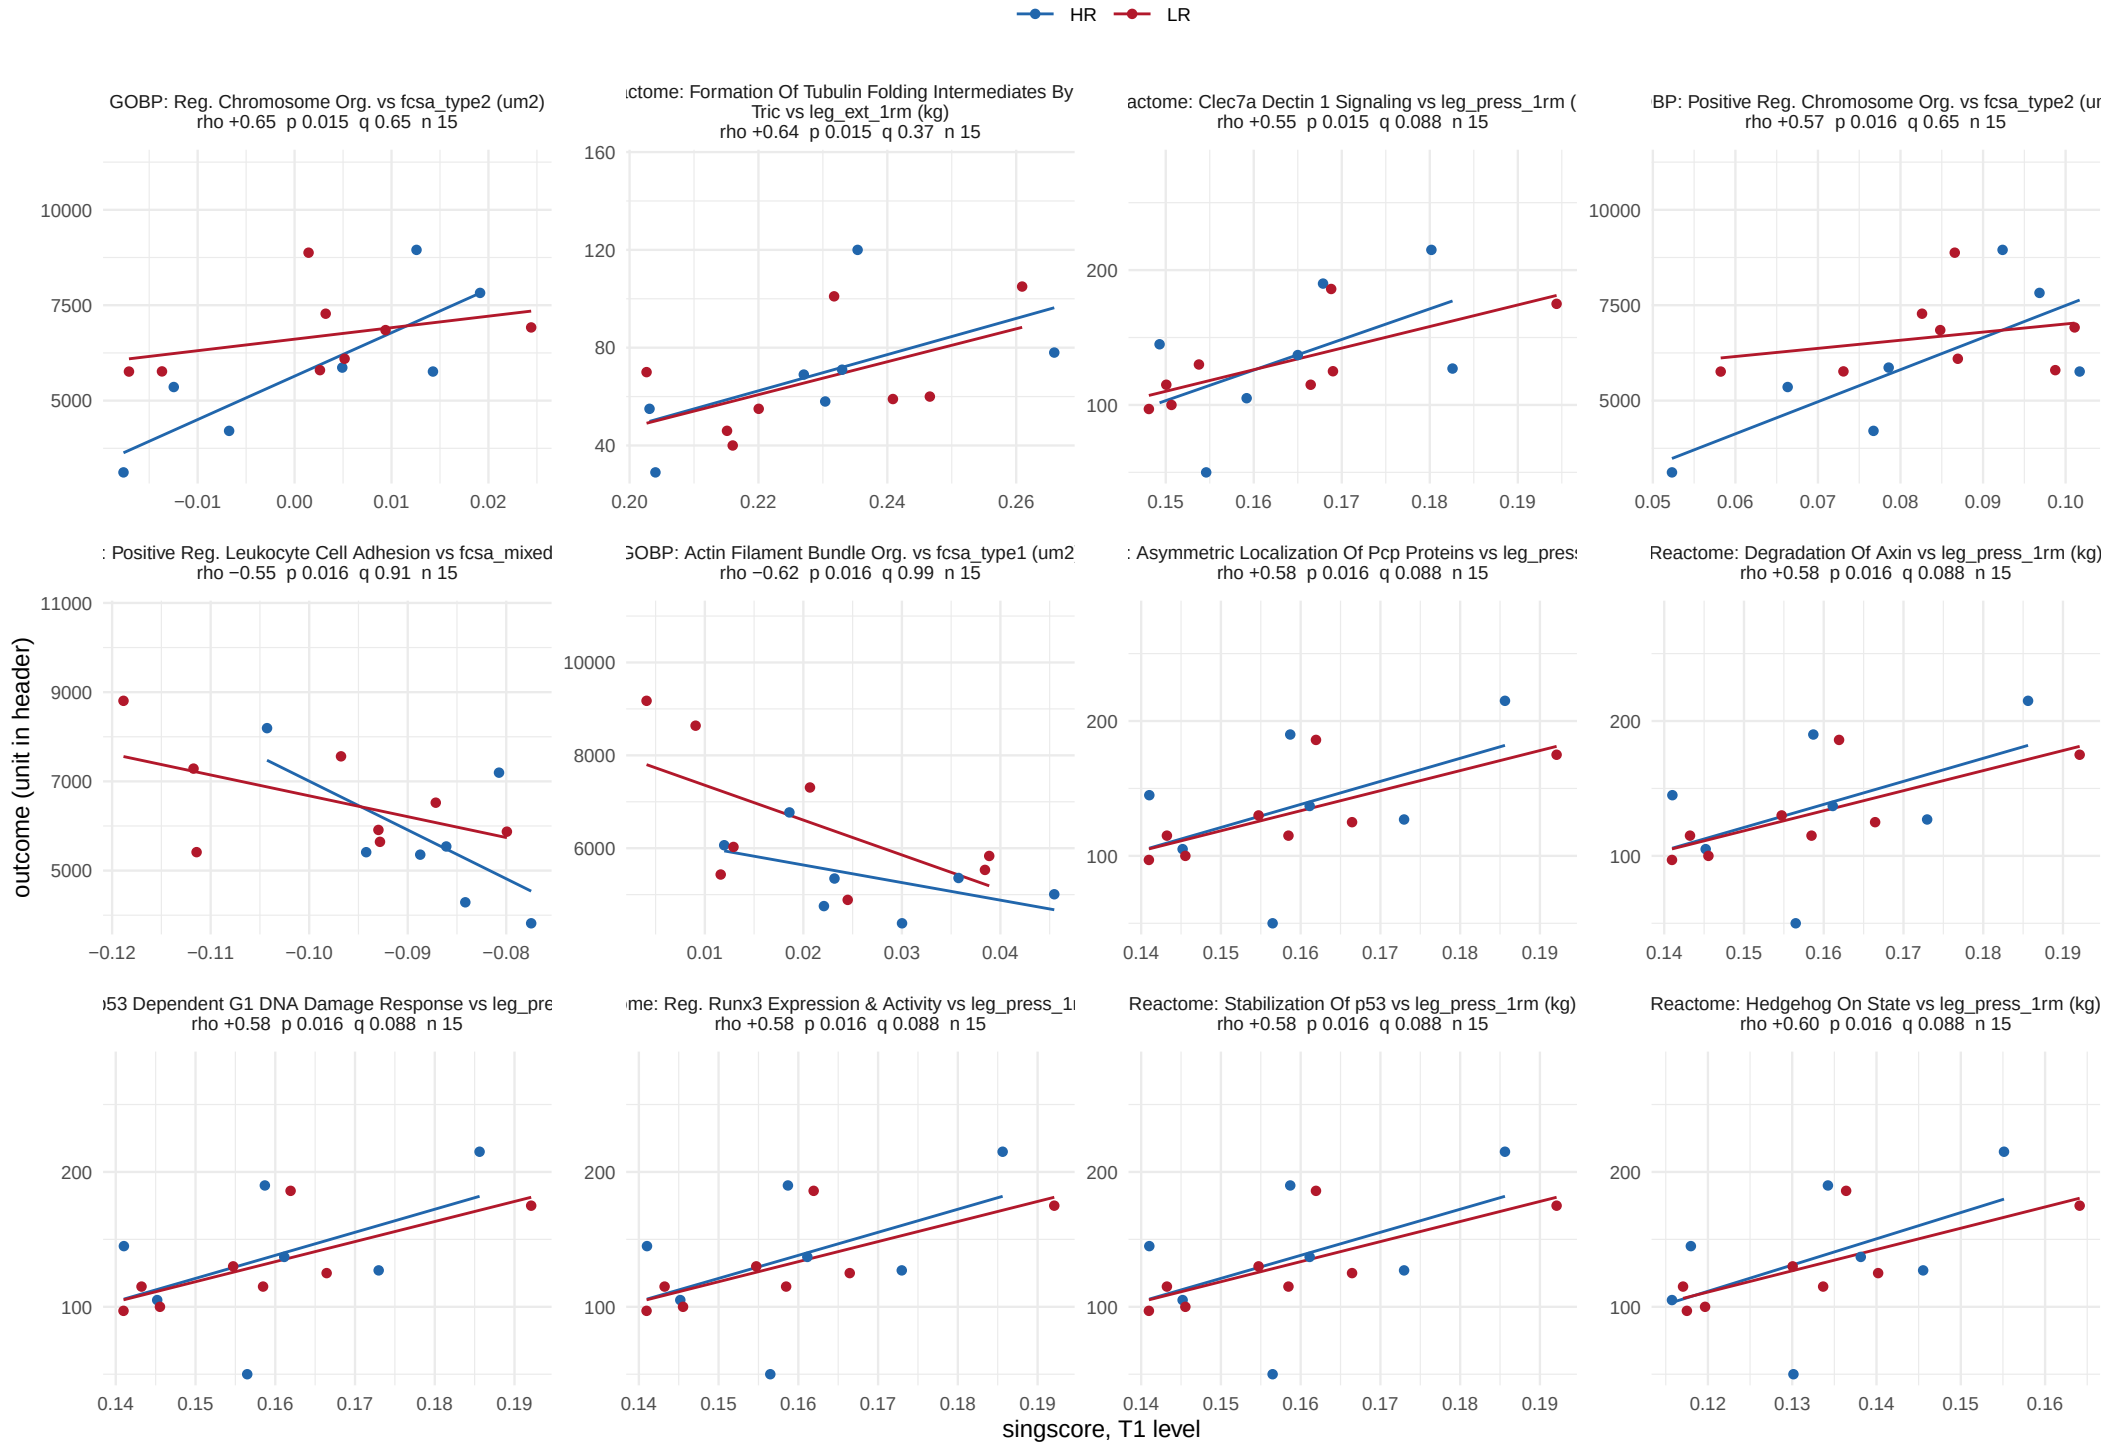

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


653 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 17 of 55.

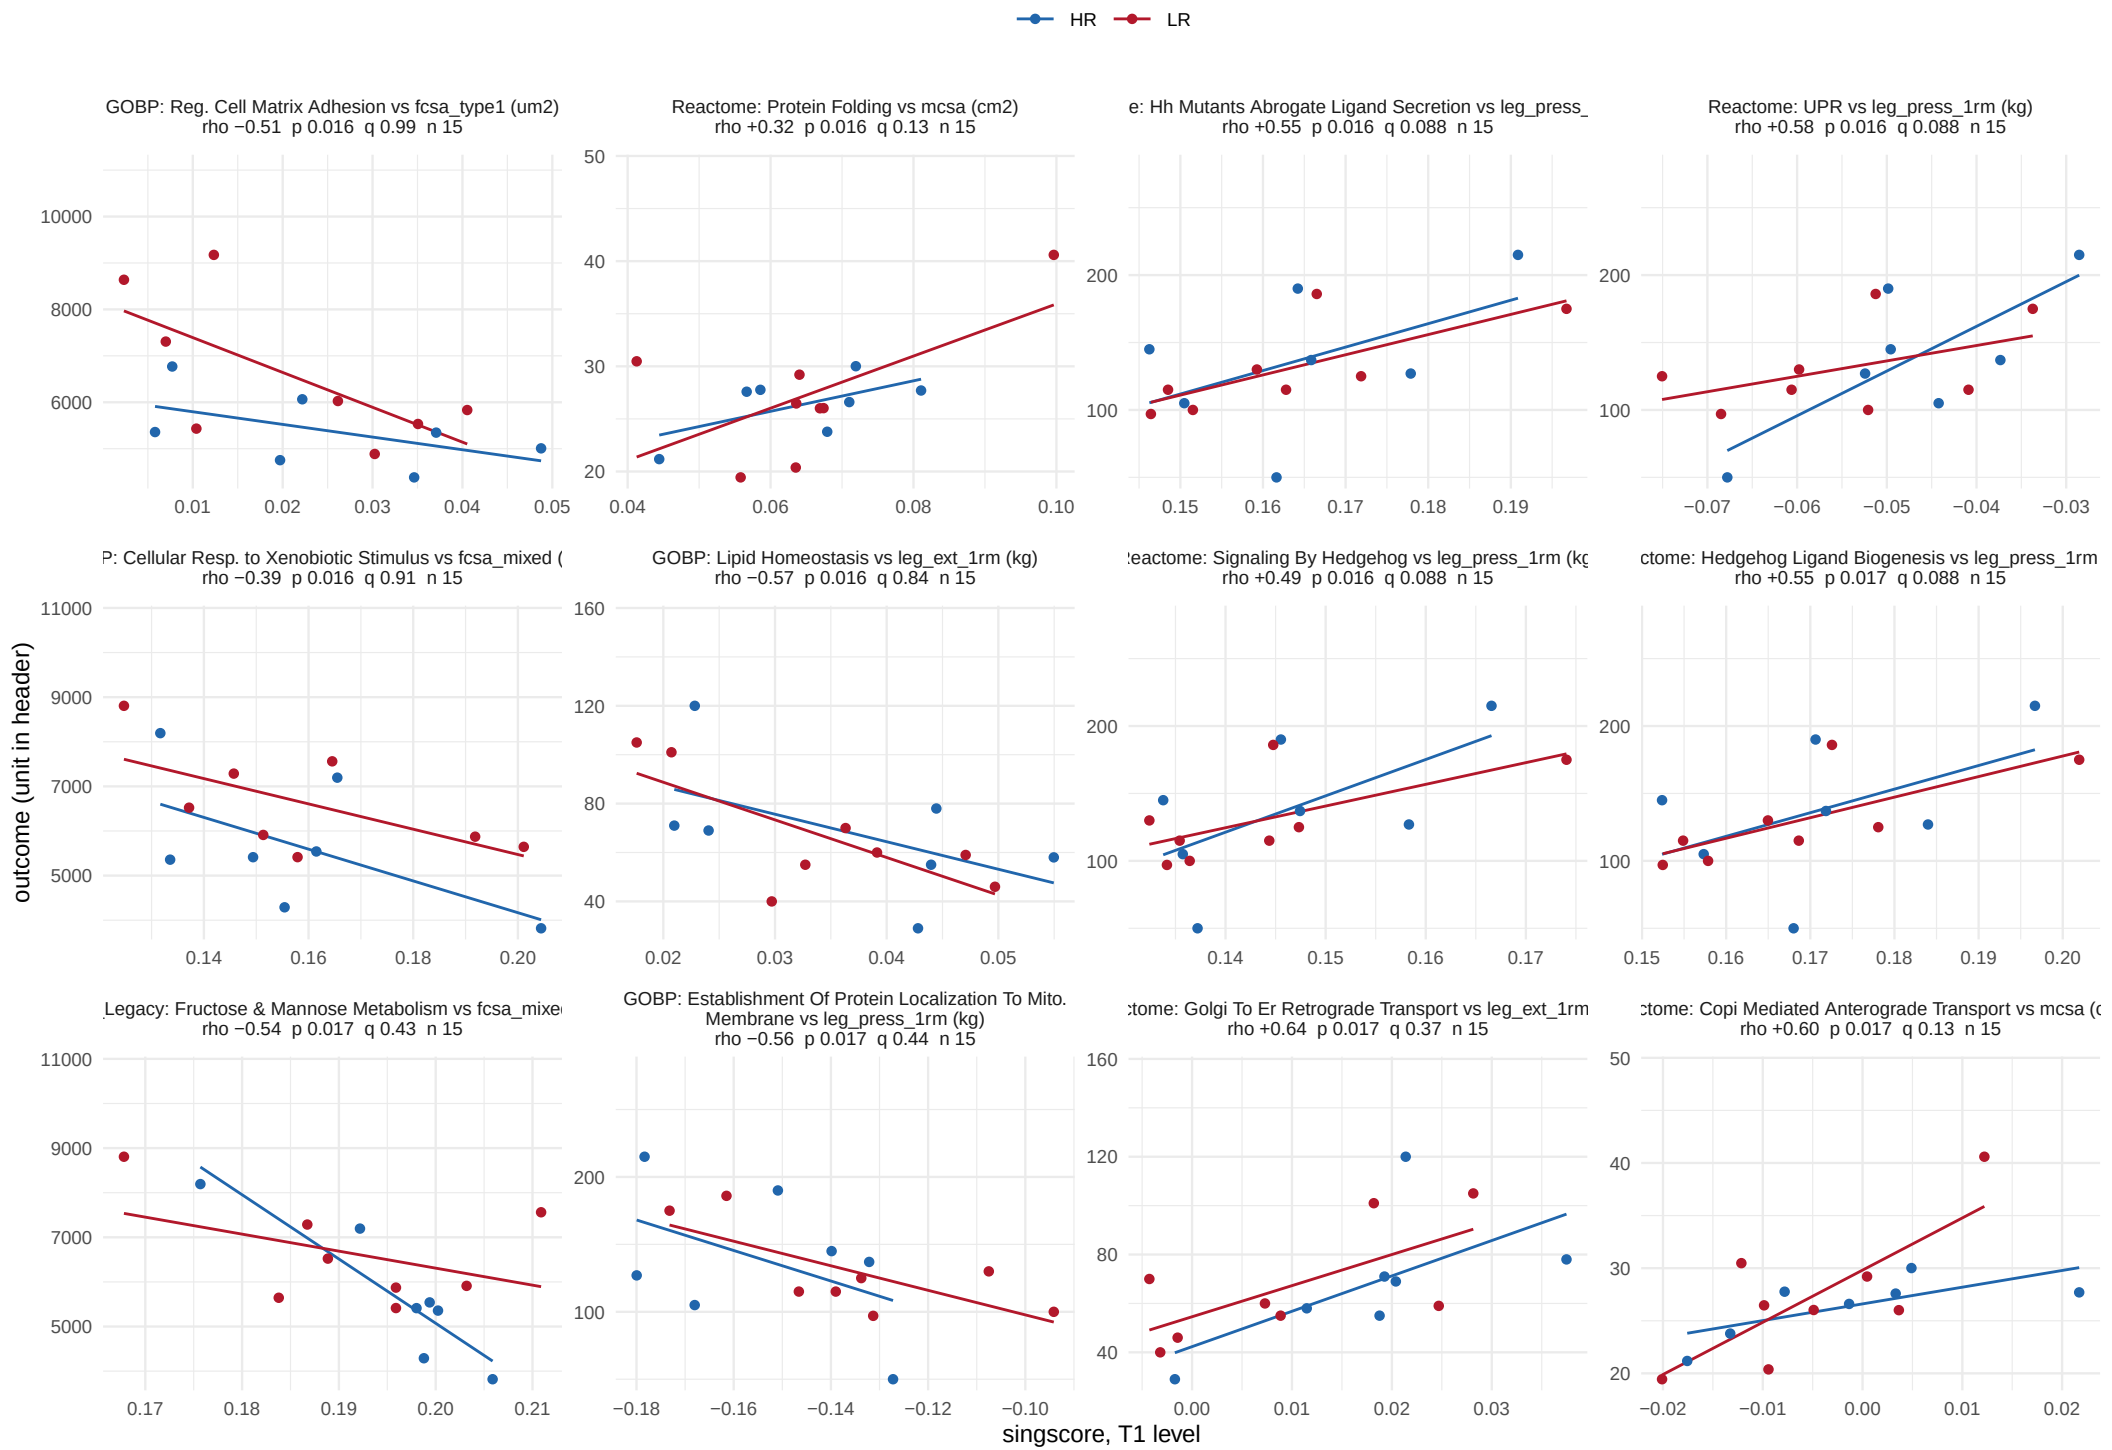

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


653 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 18 of 55.

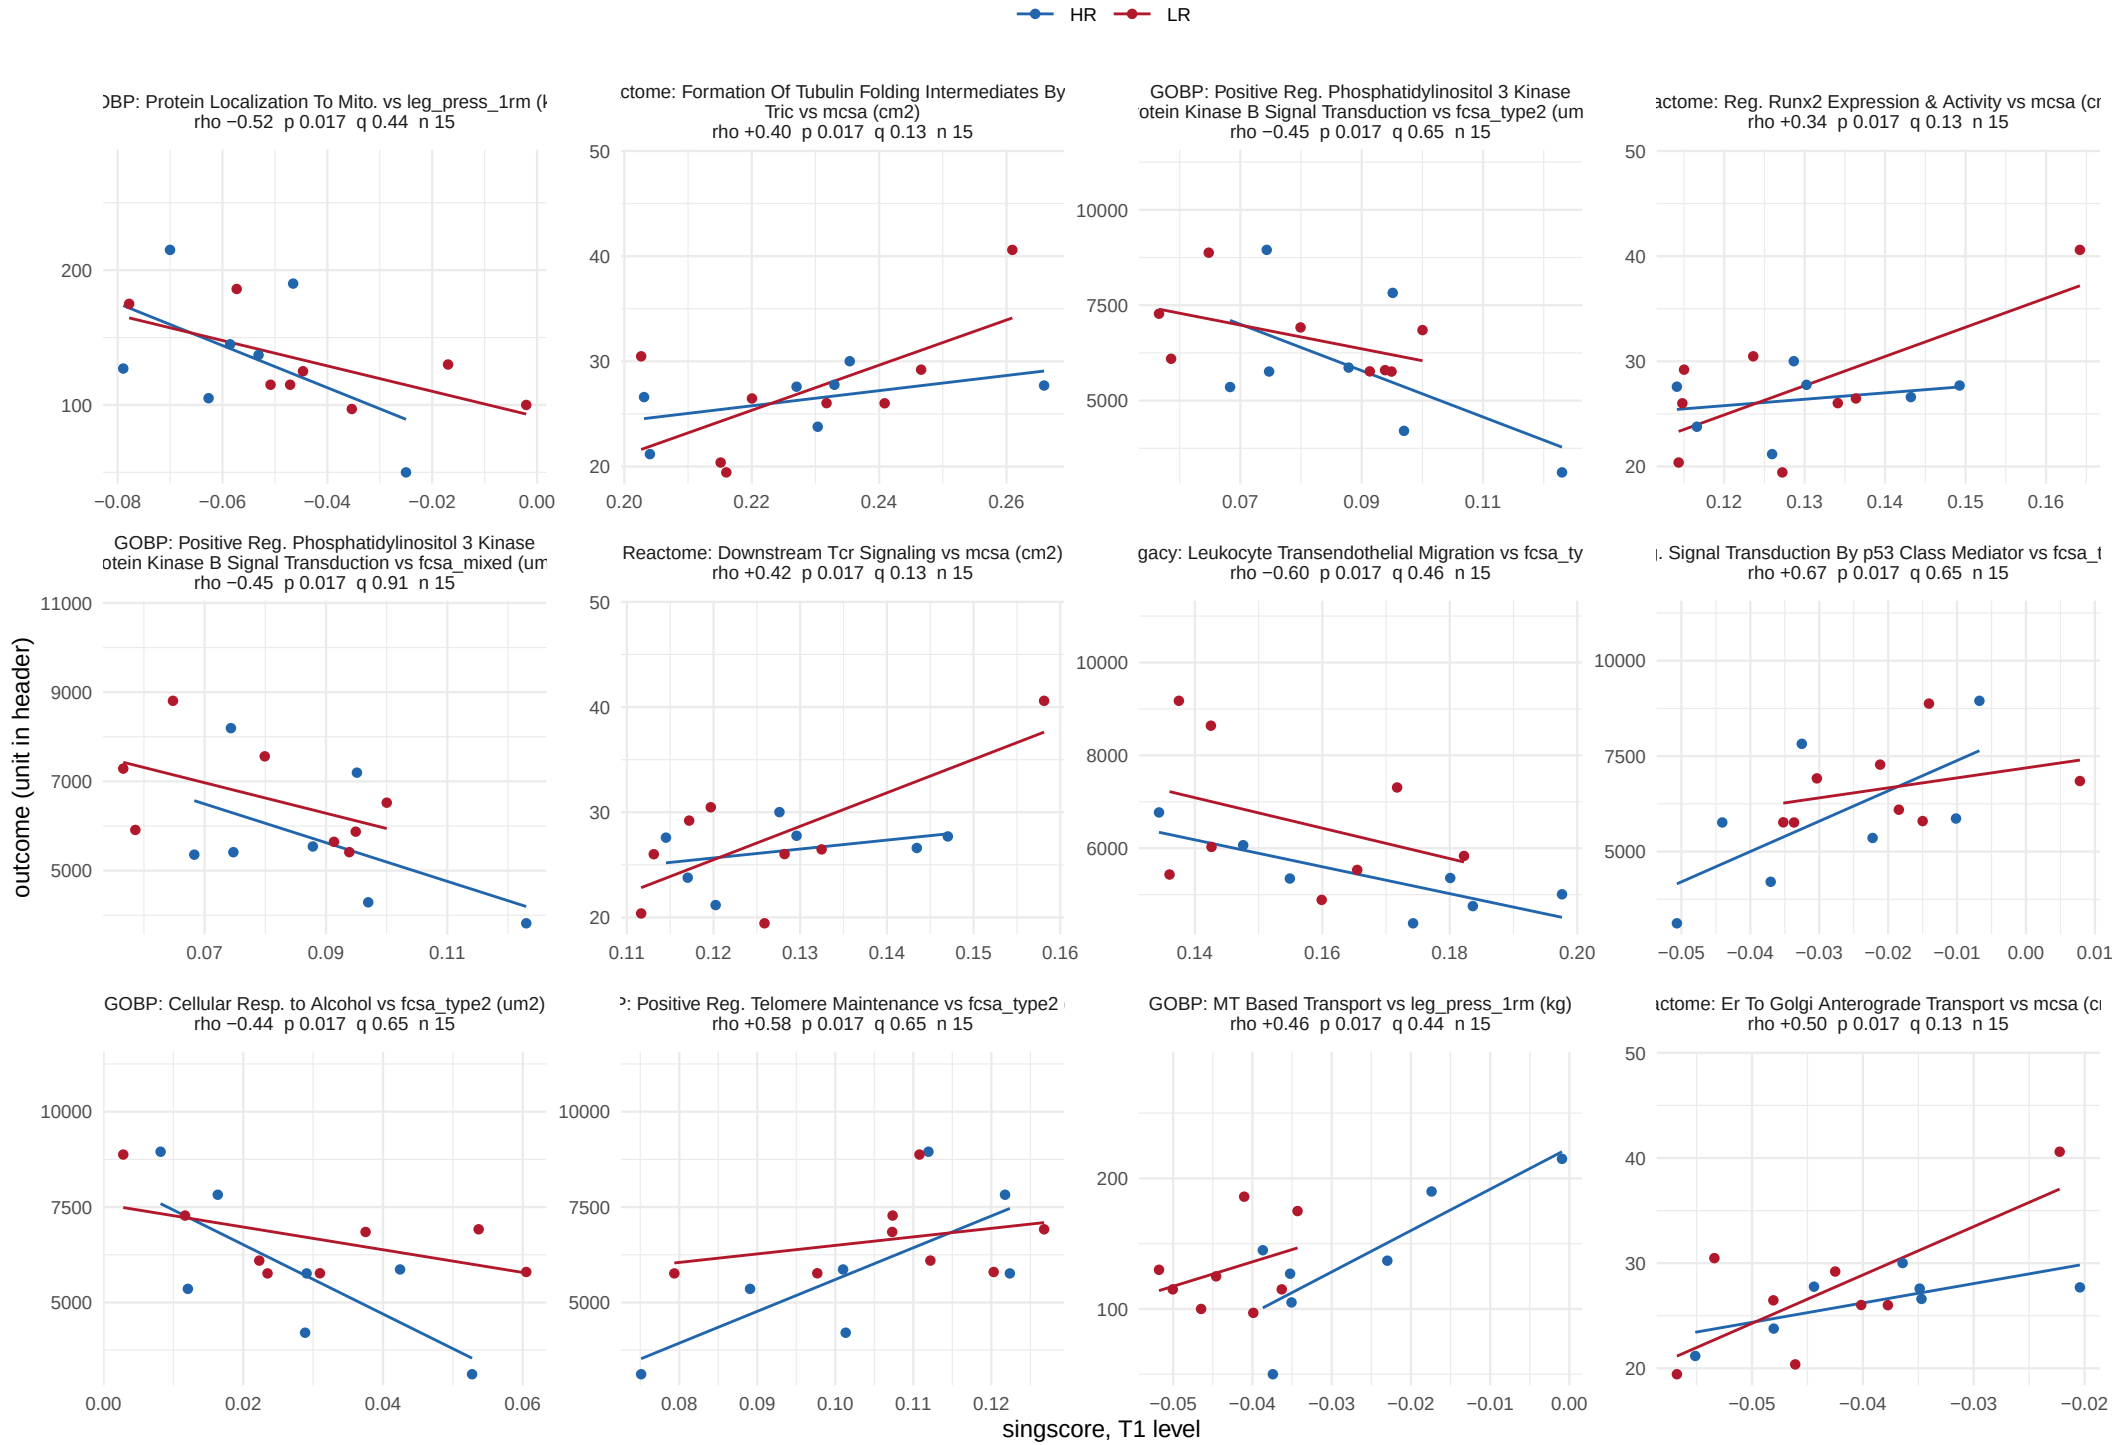

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


653 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 19 of 55.

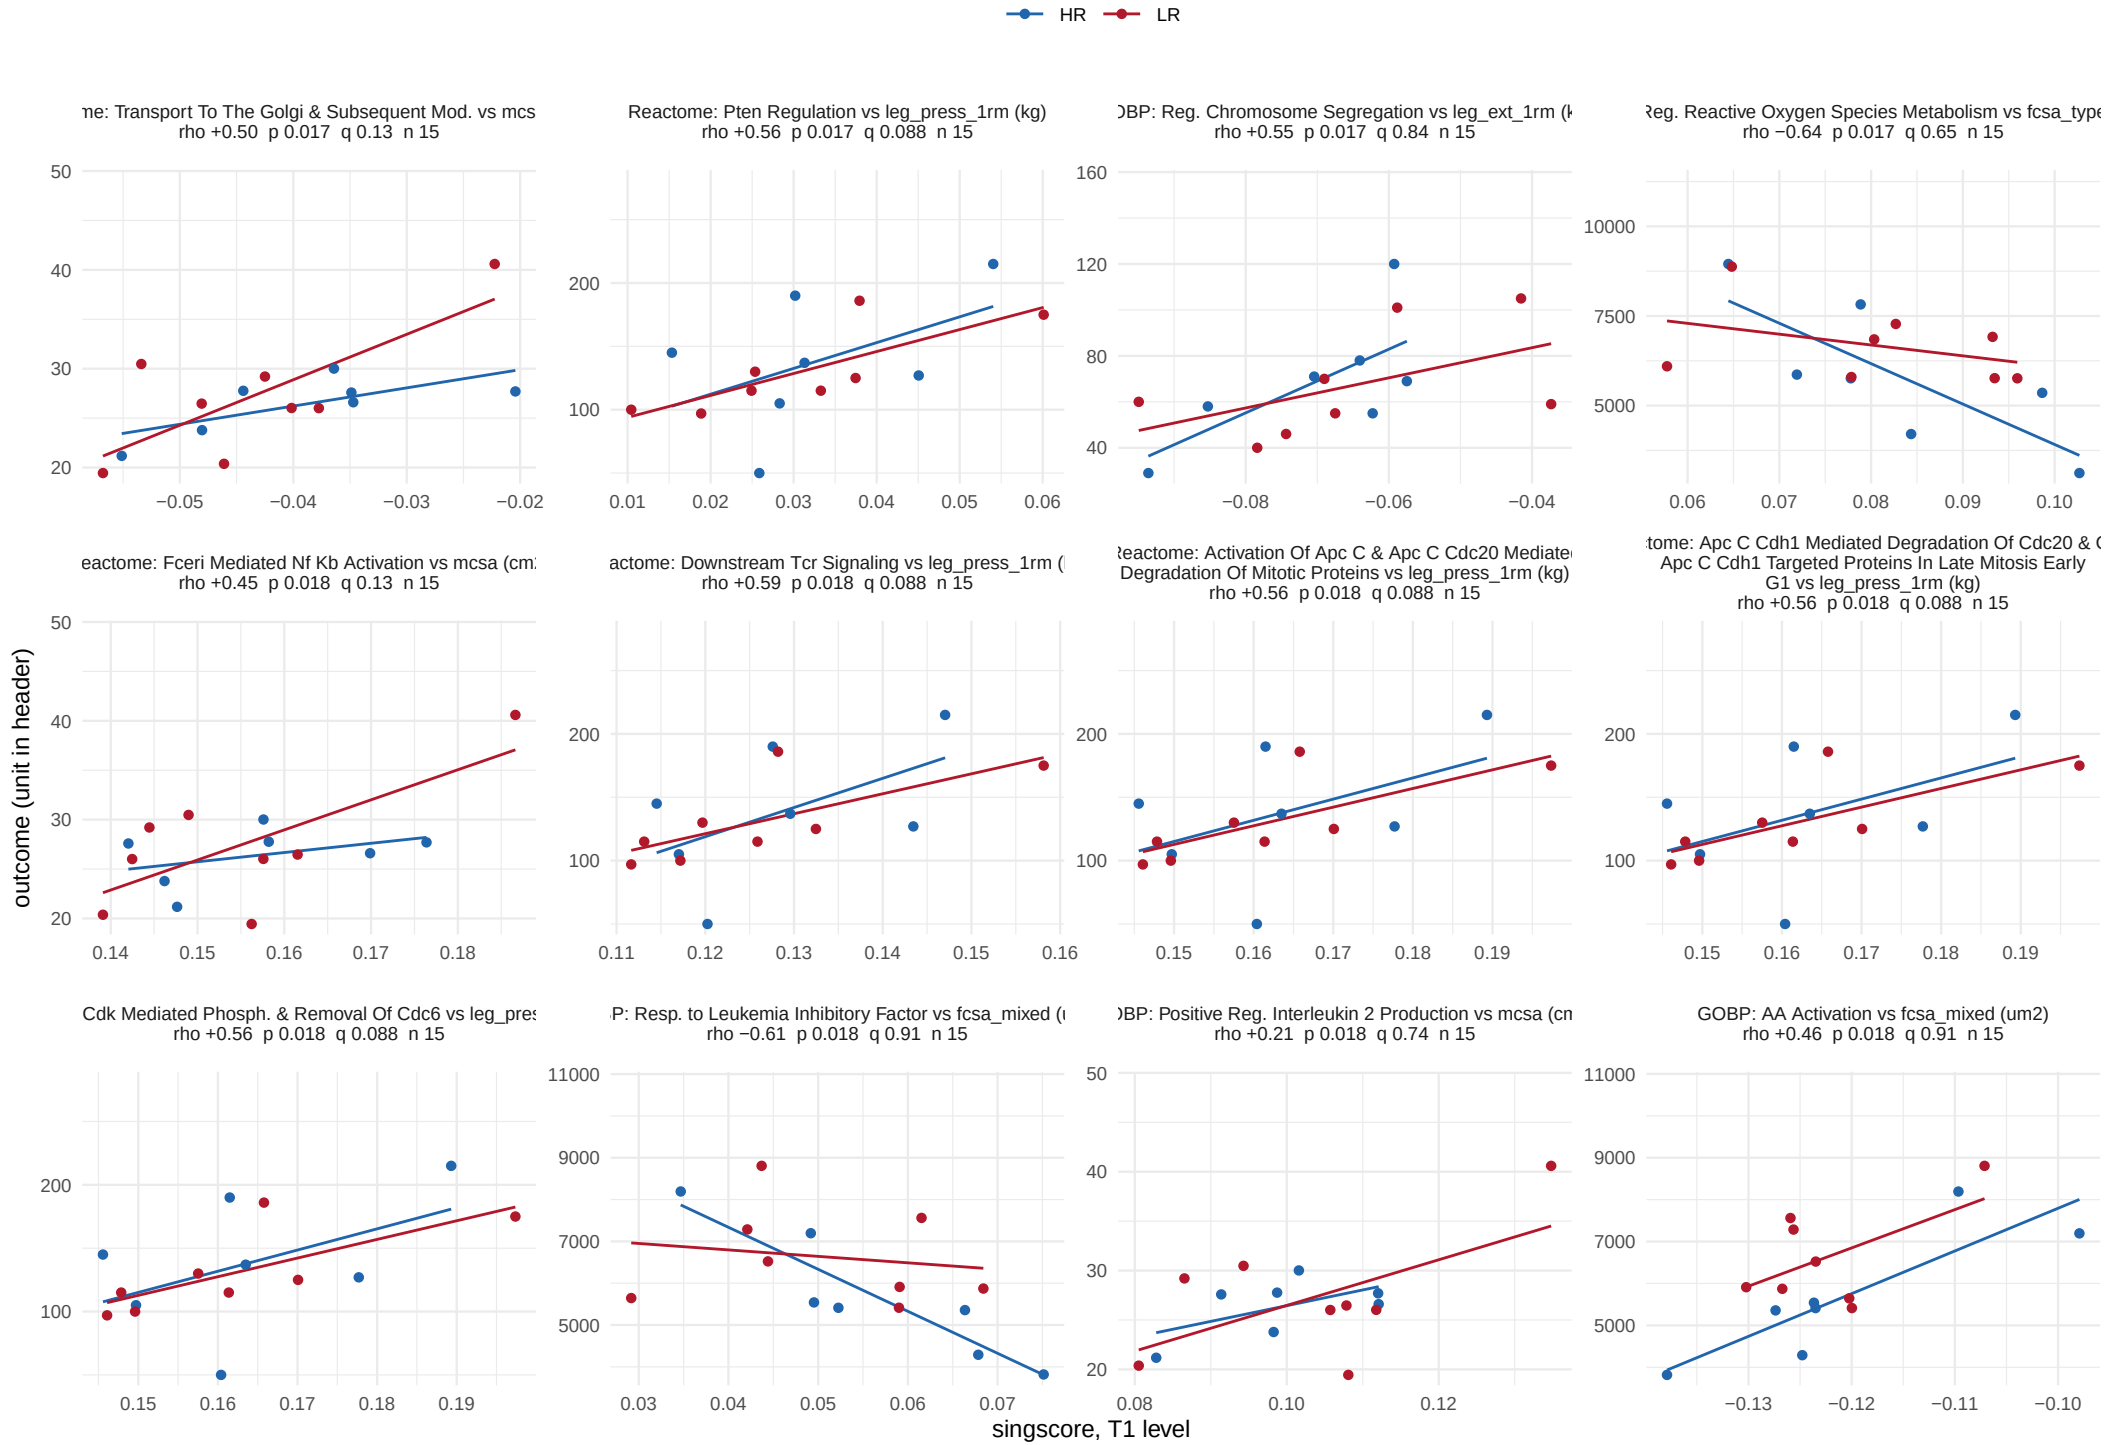

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


653 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 20 of 55.

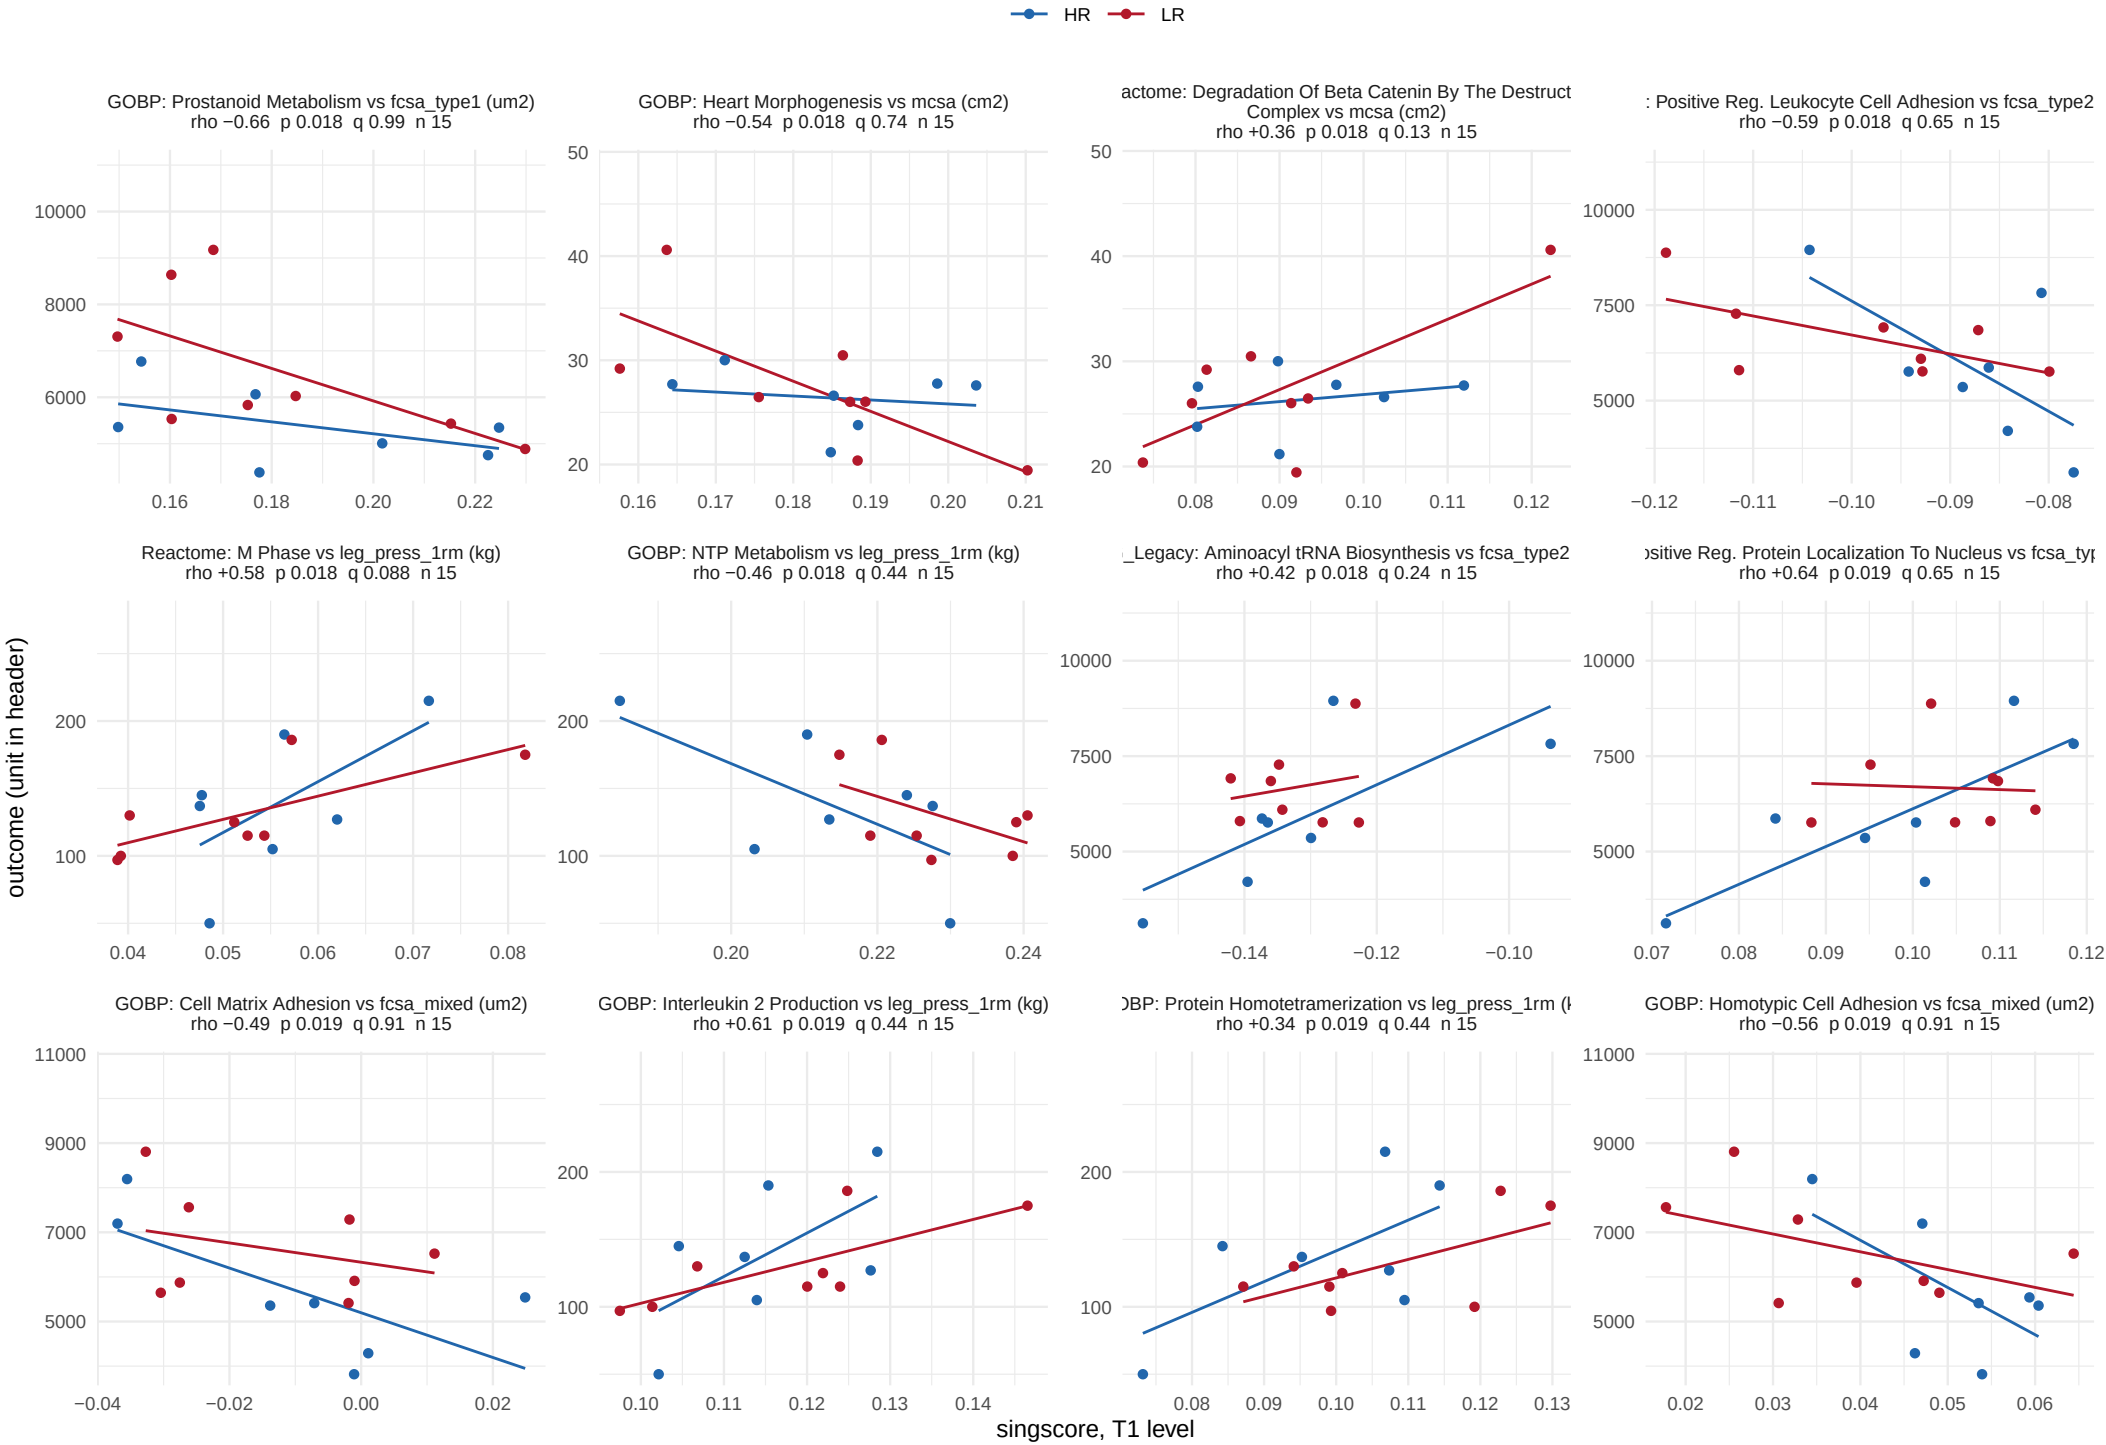

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


653 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 21 of 55.

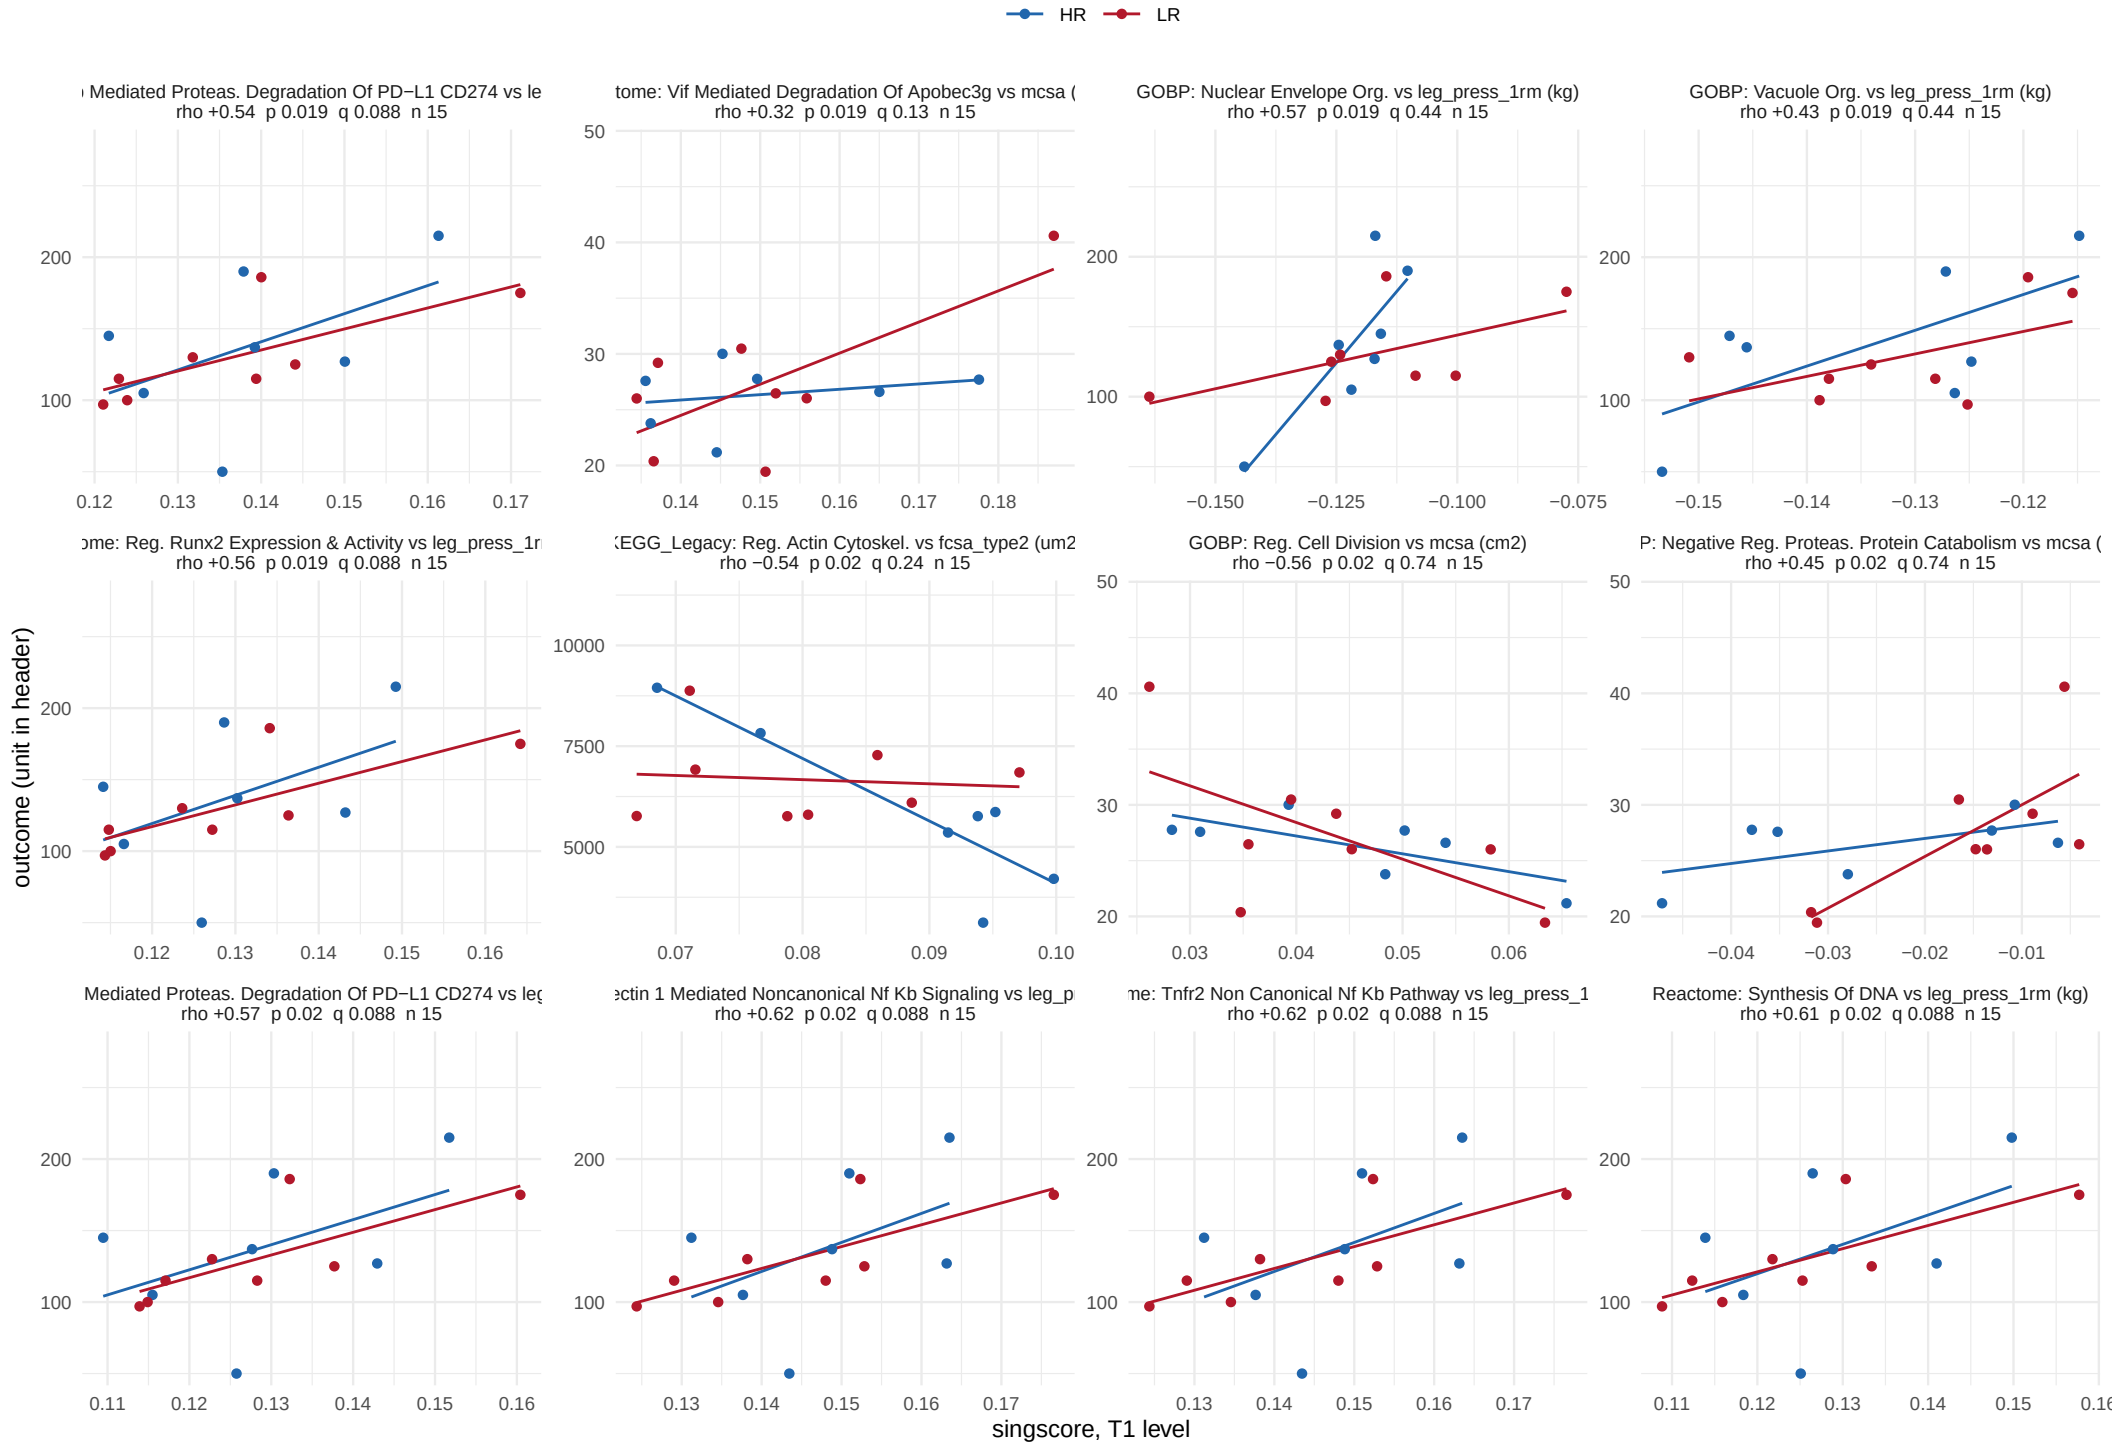

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


653 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 22 of 55.

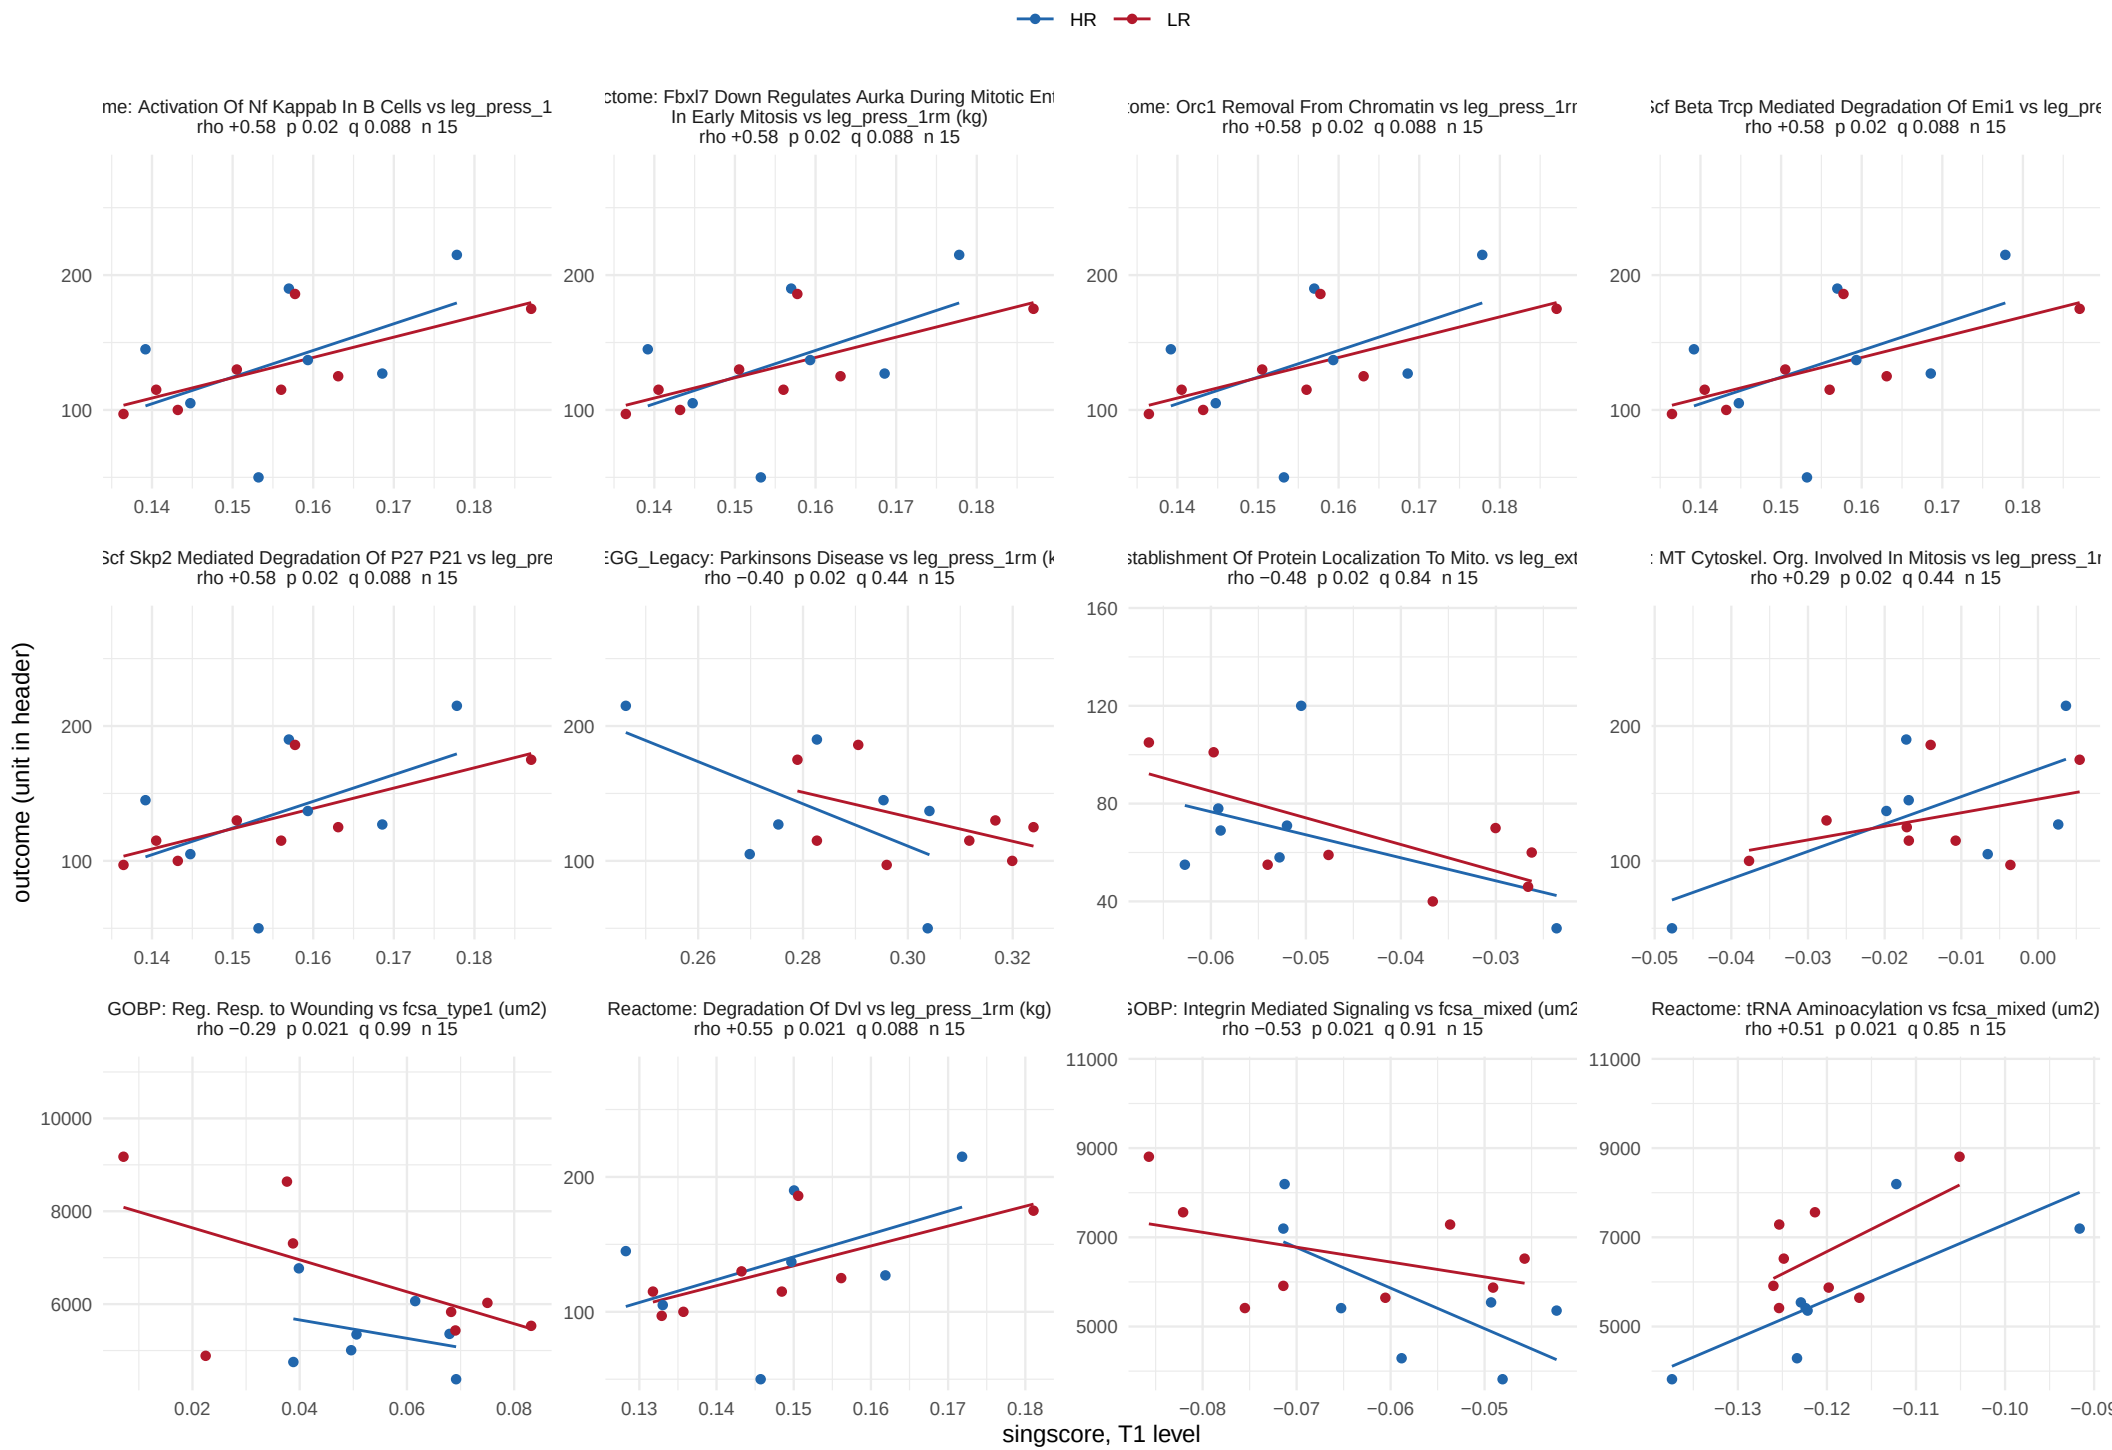

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


653 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 23 of 55.

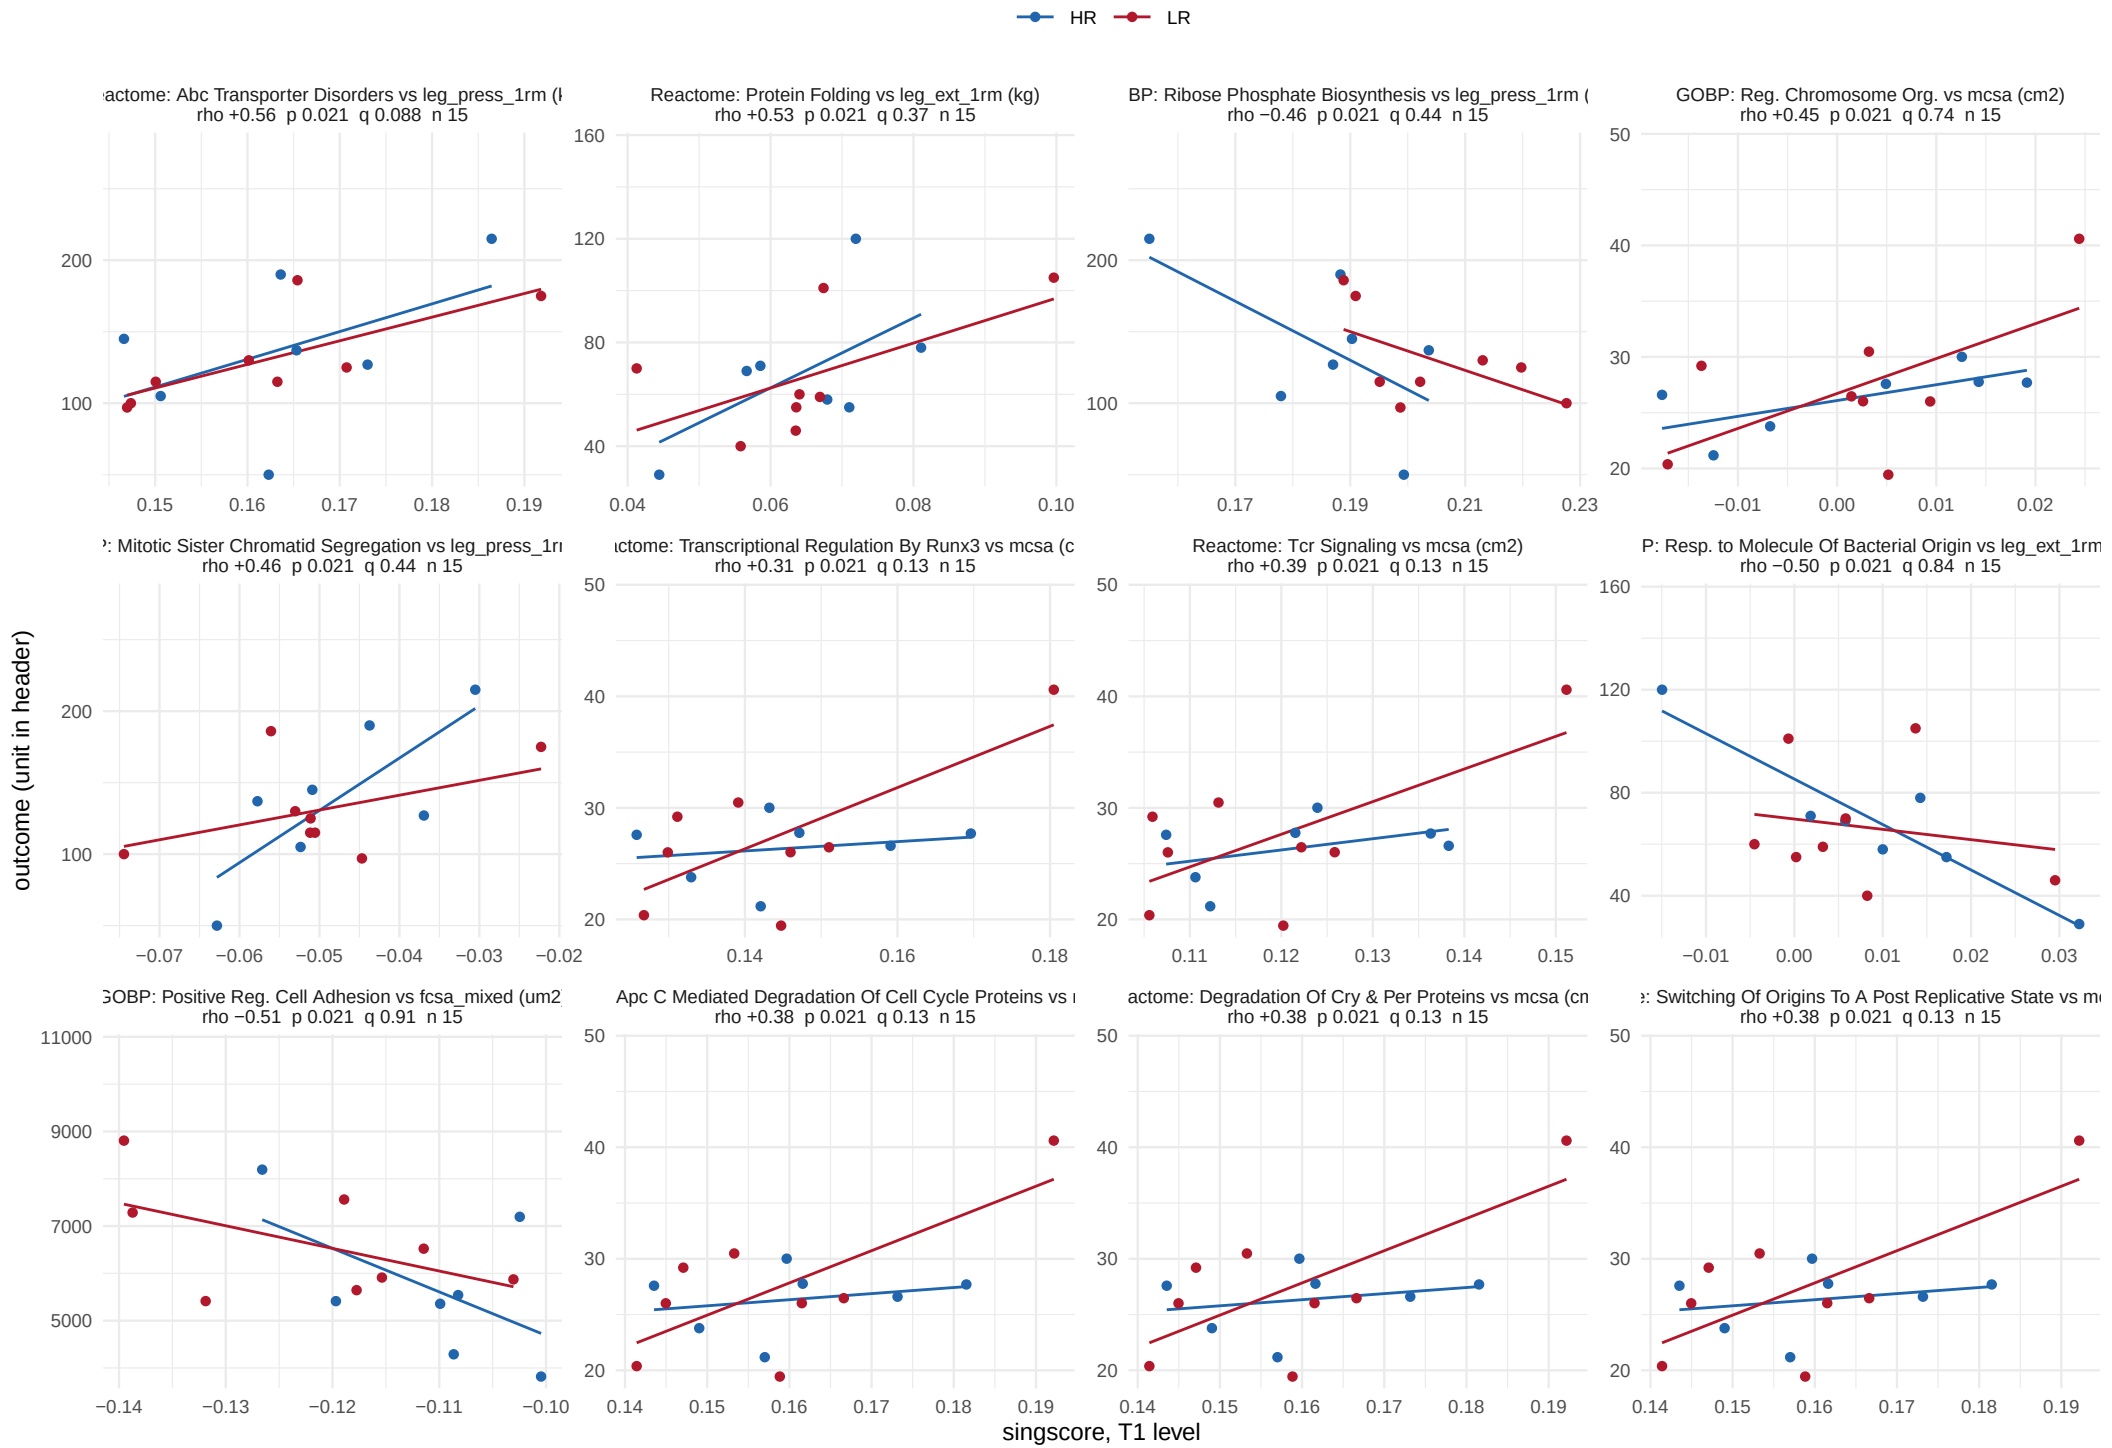

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


653 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 24 of 55.

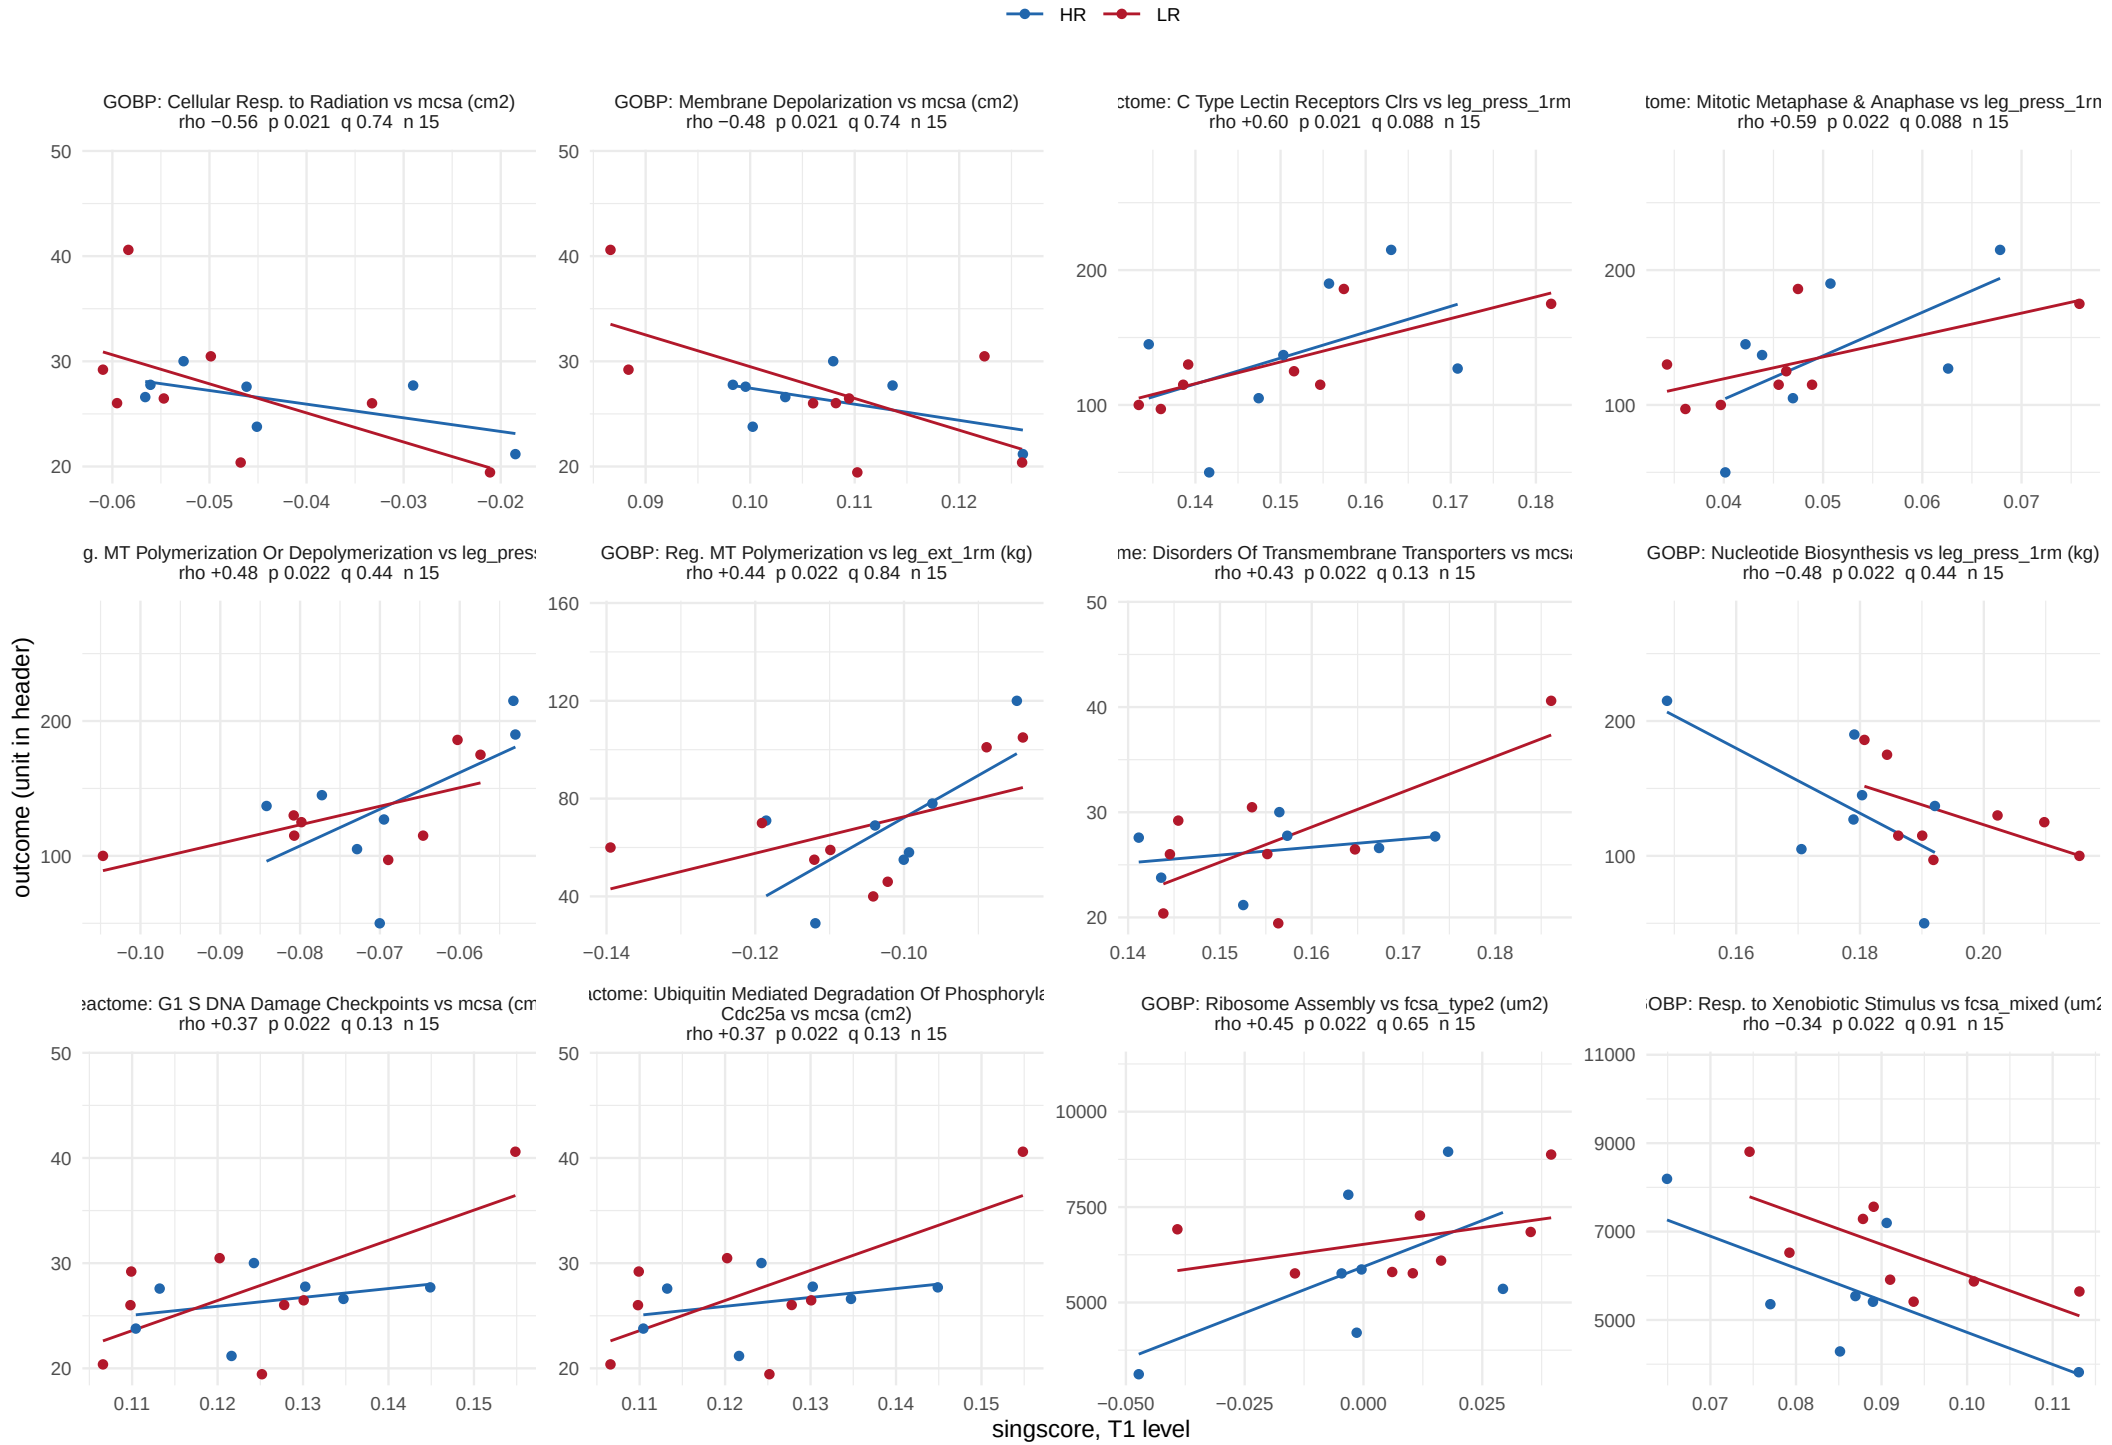

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


653 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 25 of 55.

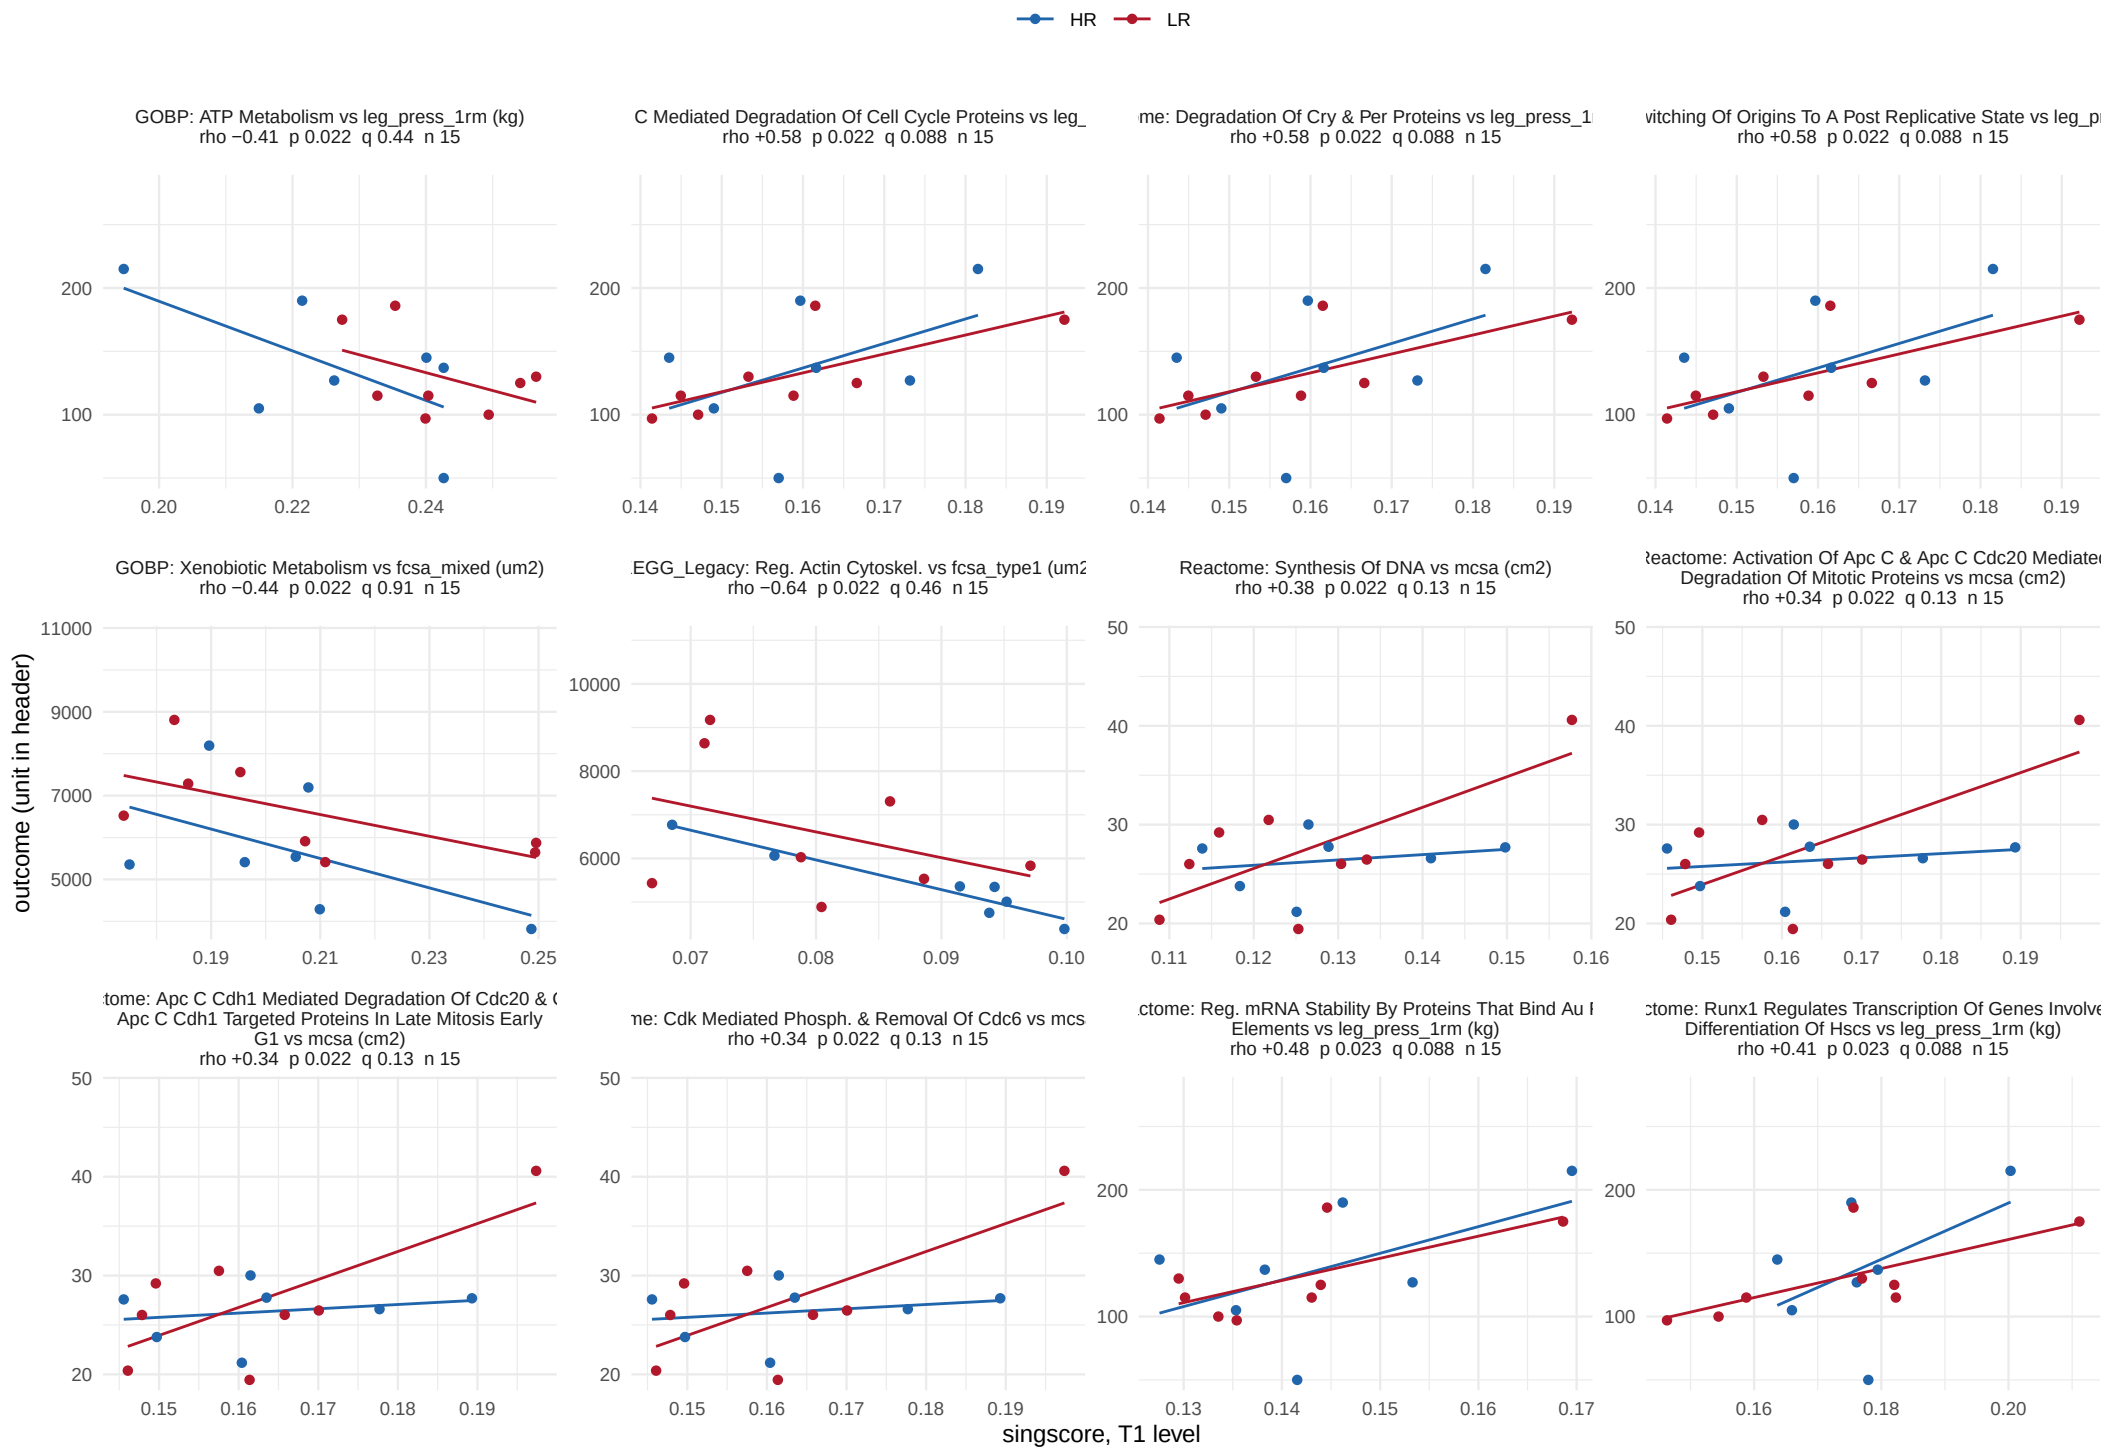

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


653 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 26 of 55.

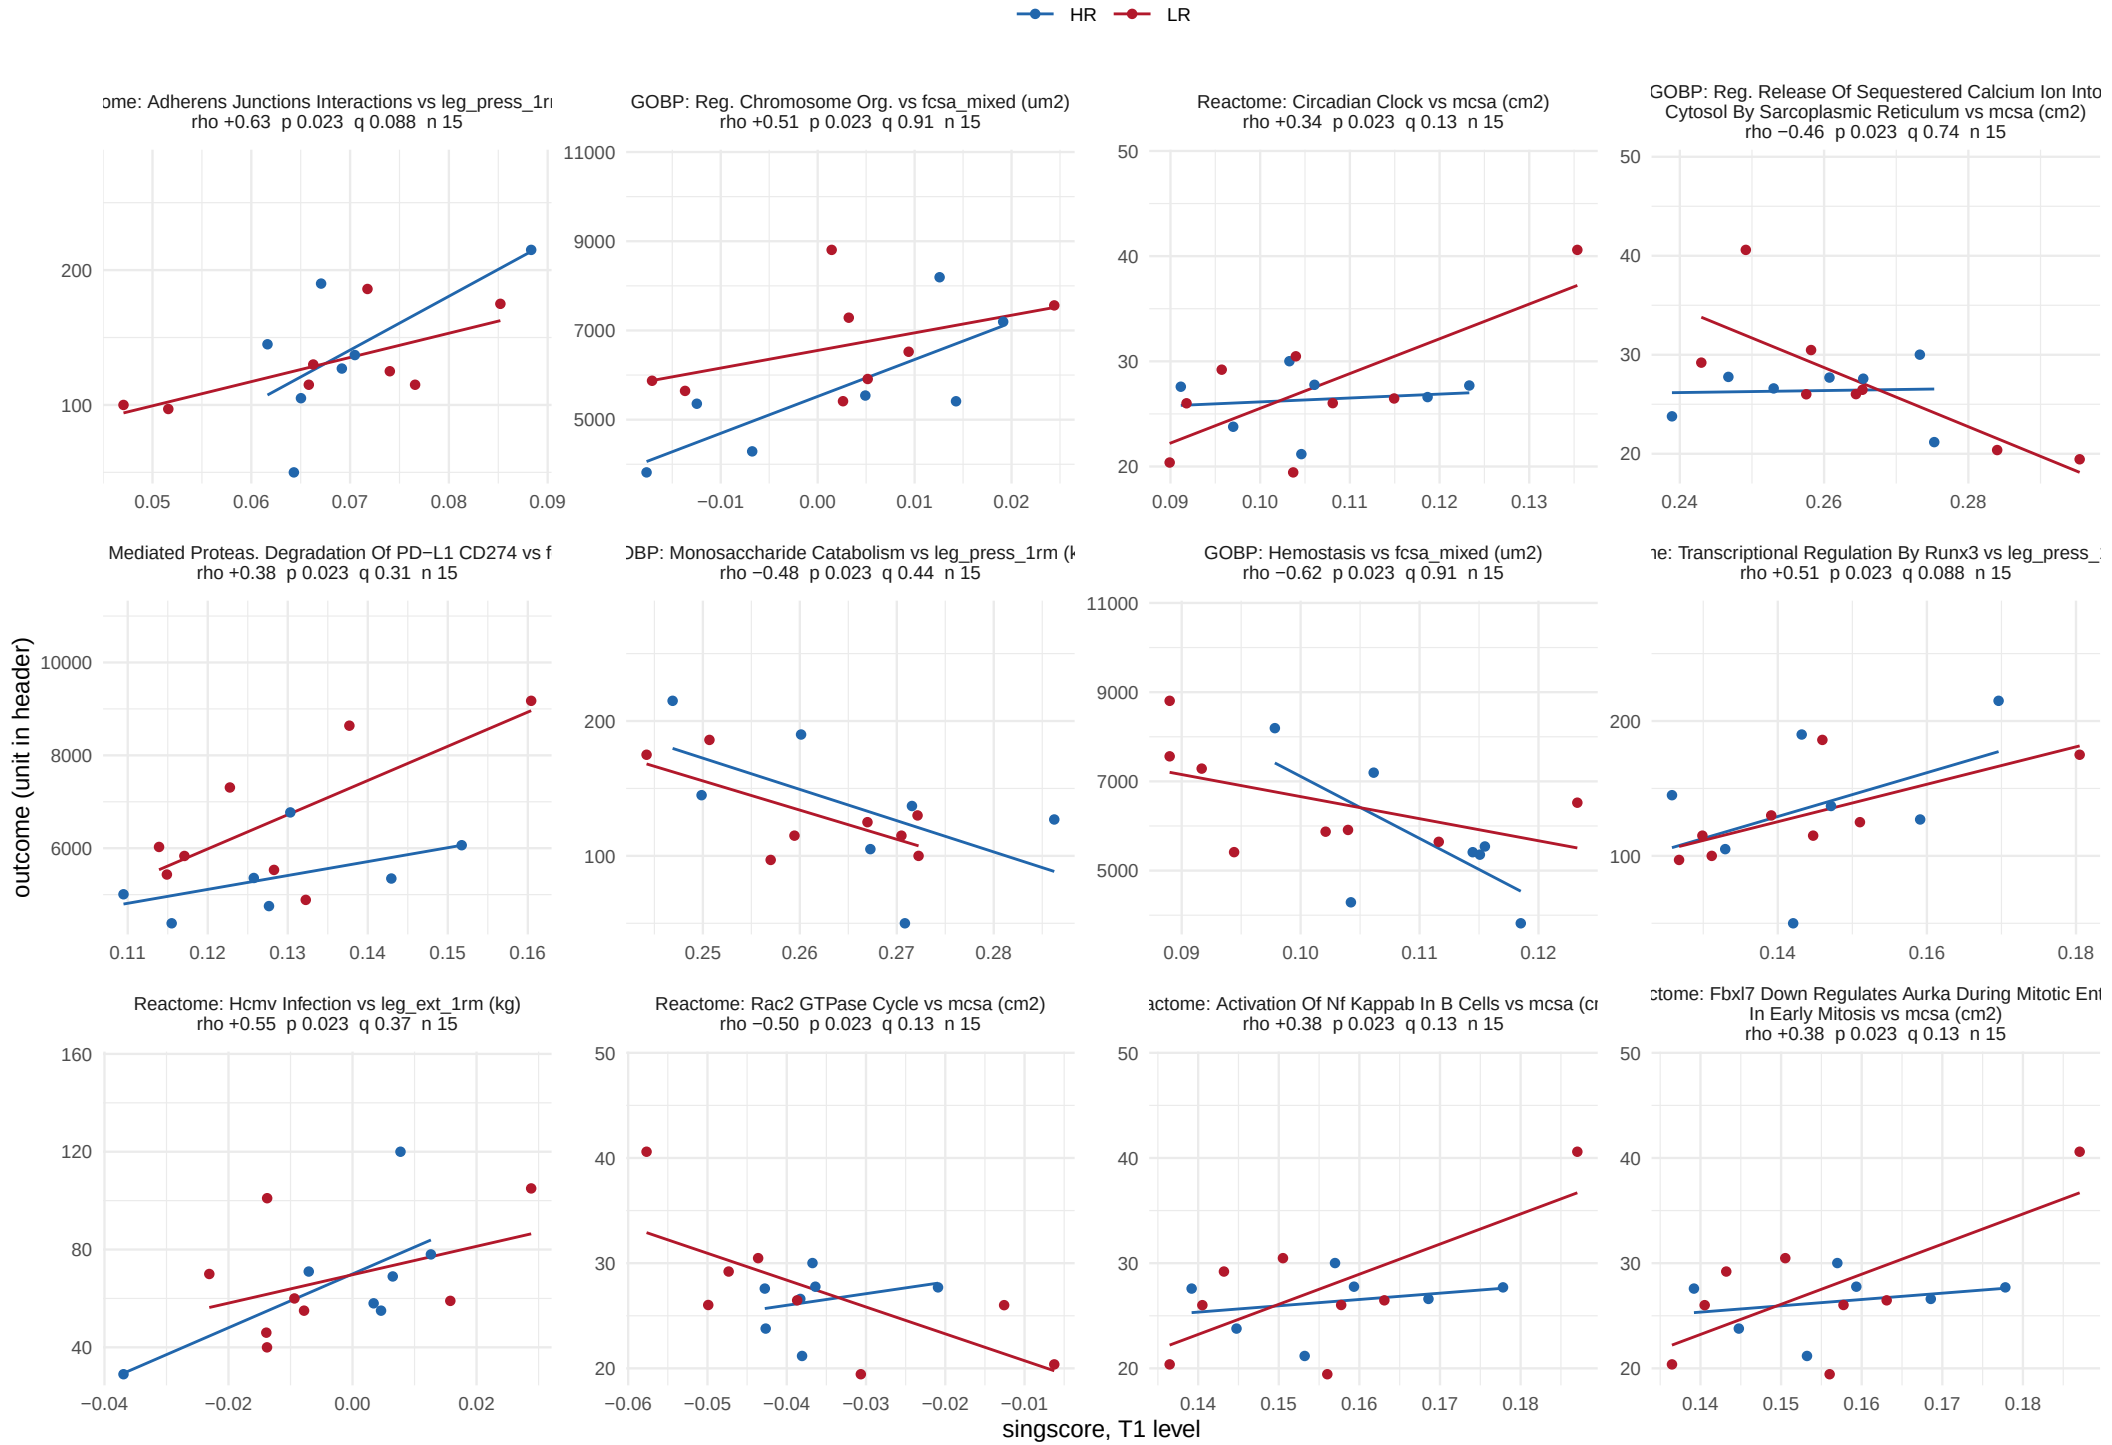

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


653 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 27 of 55.

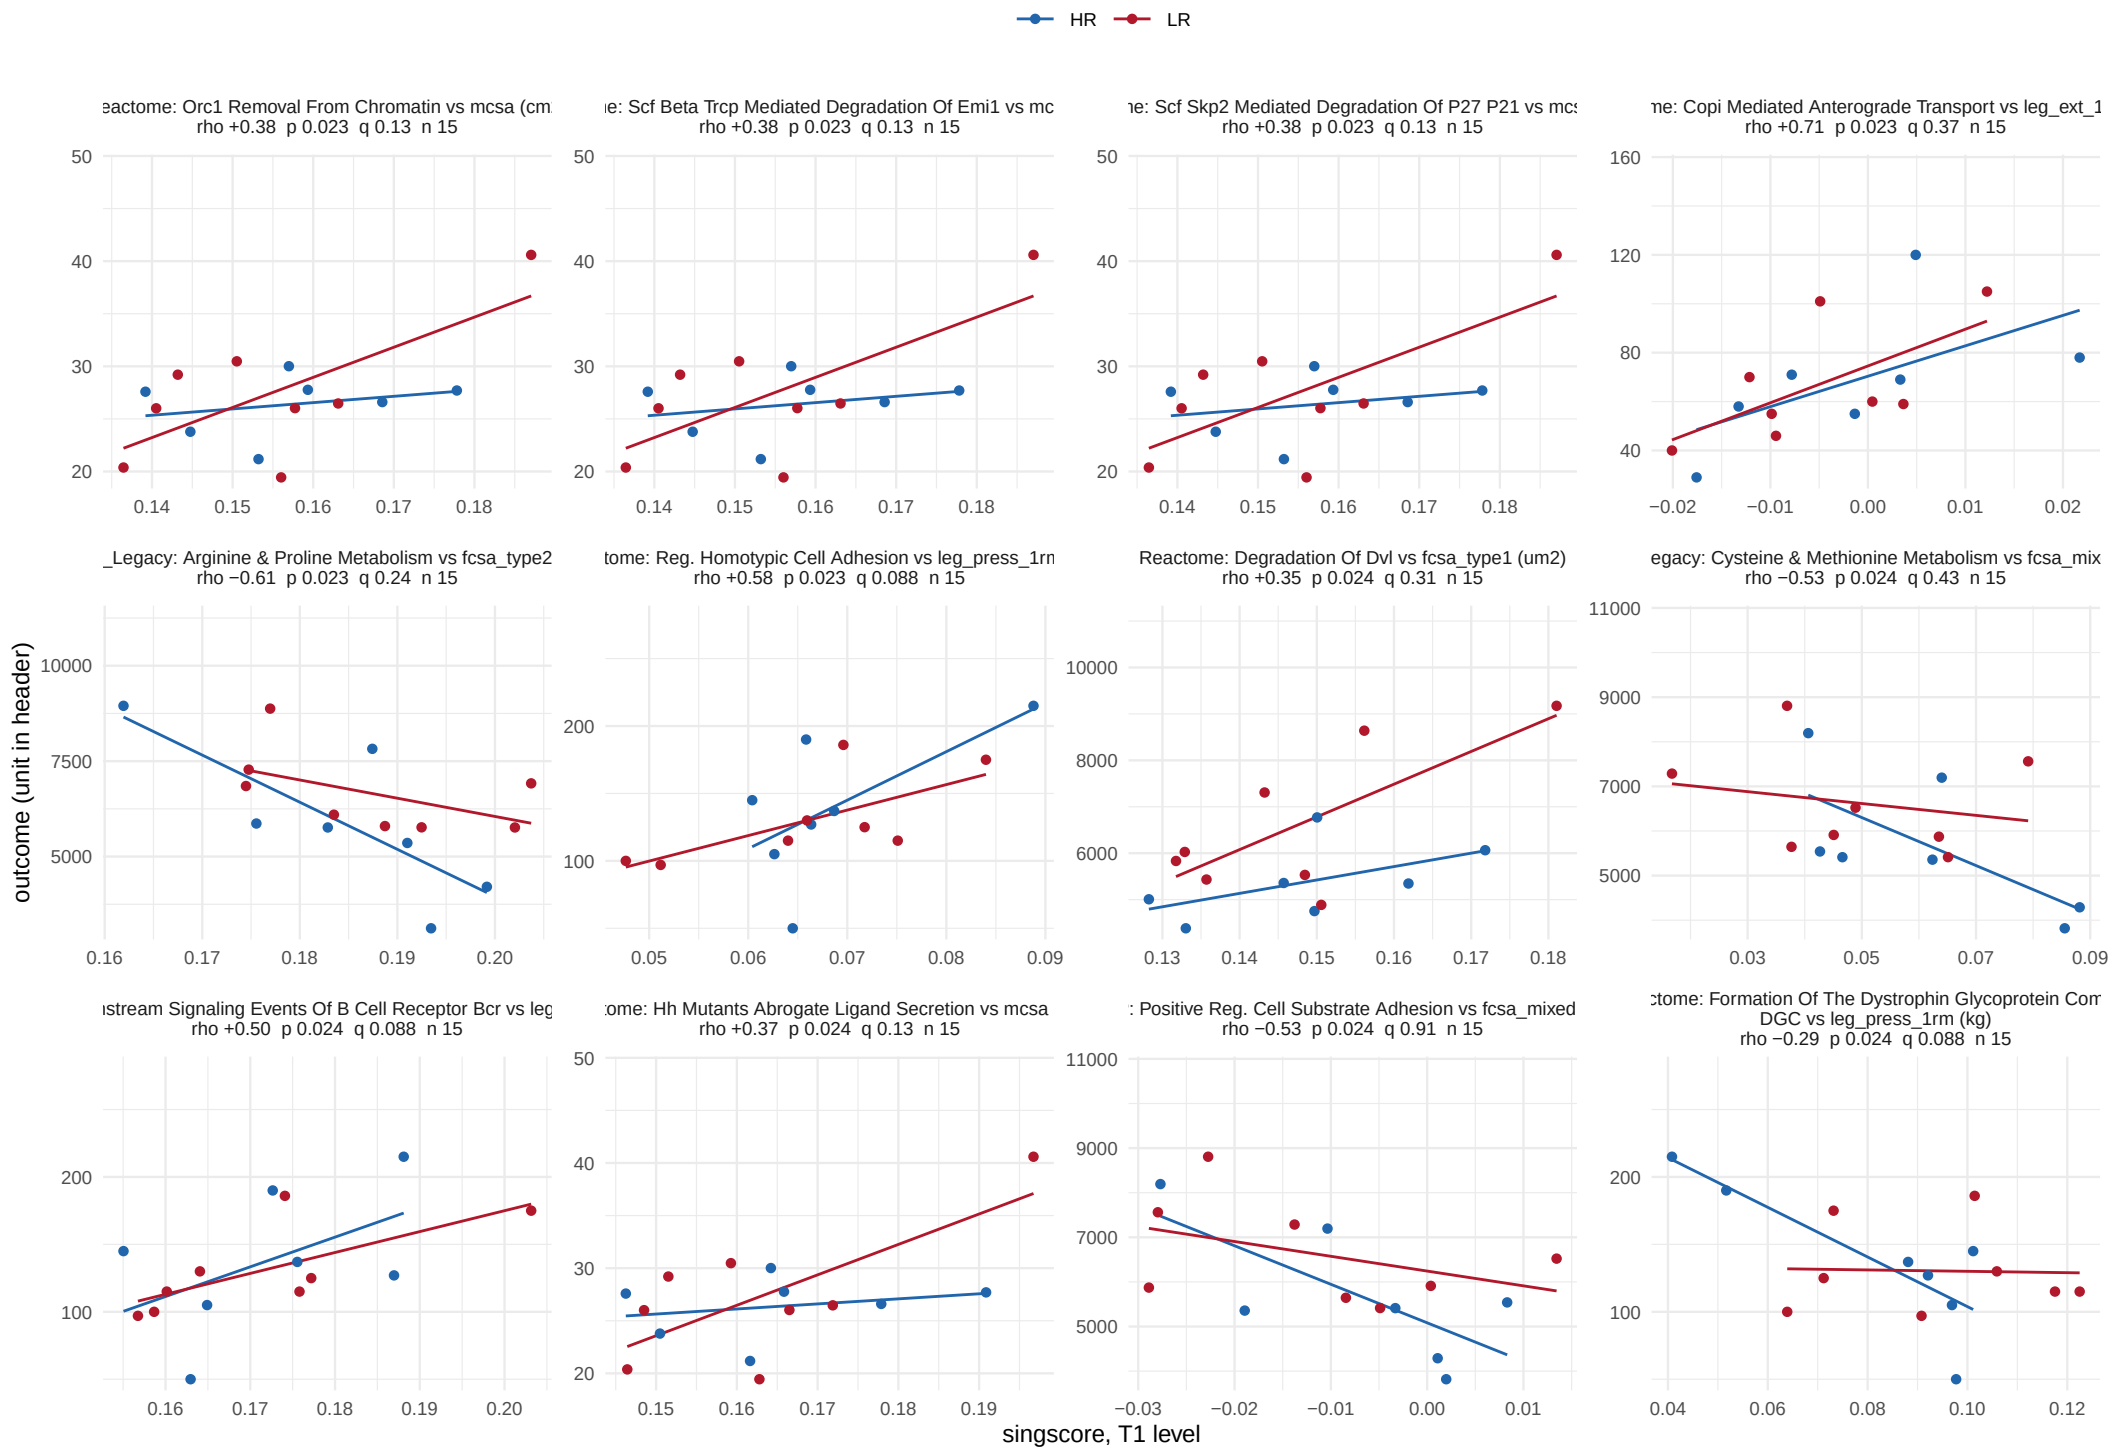

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


653 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 28 of 55.

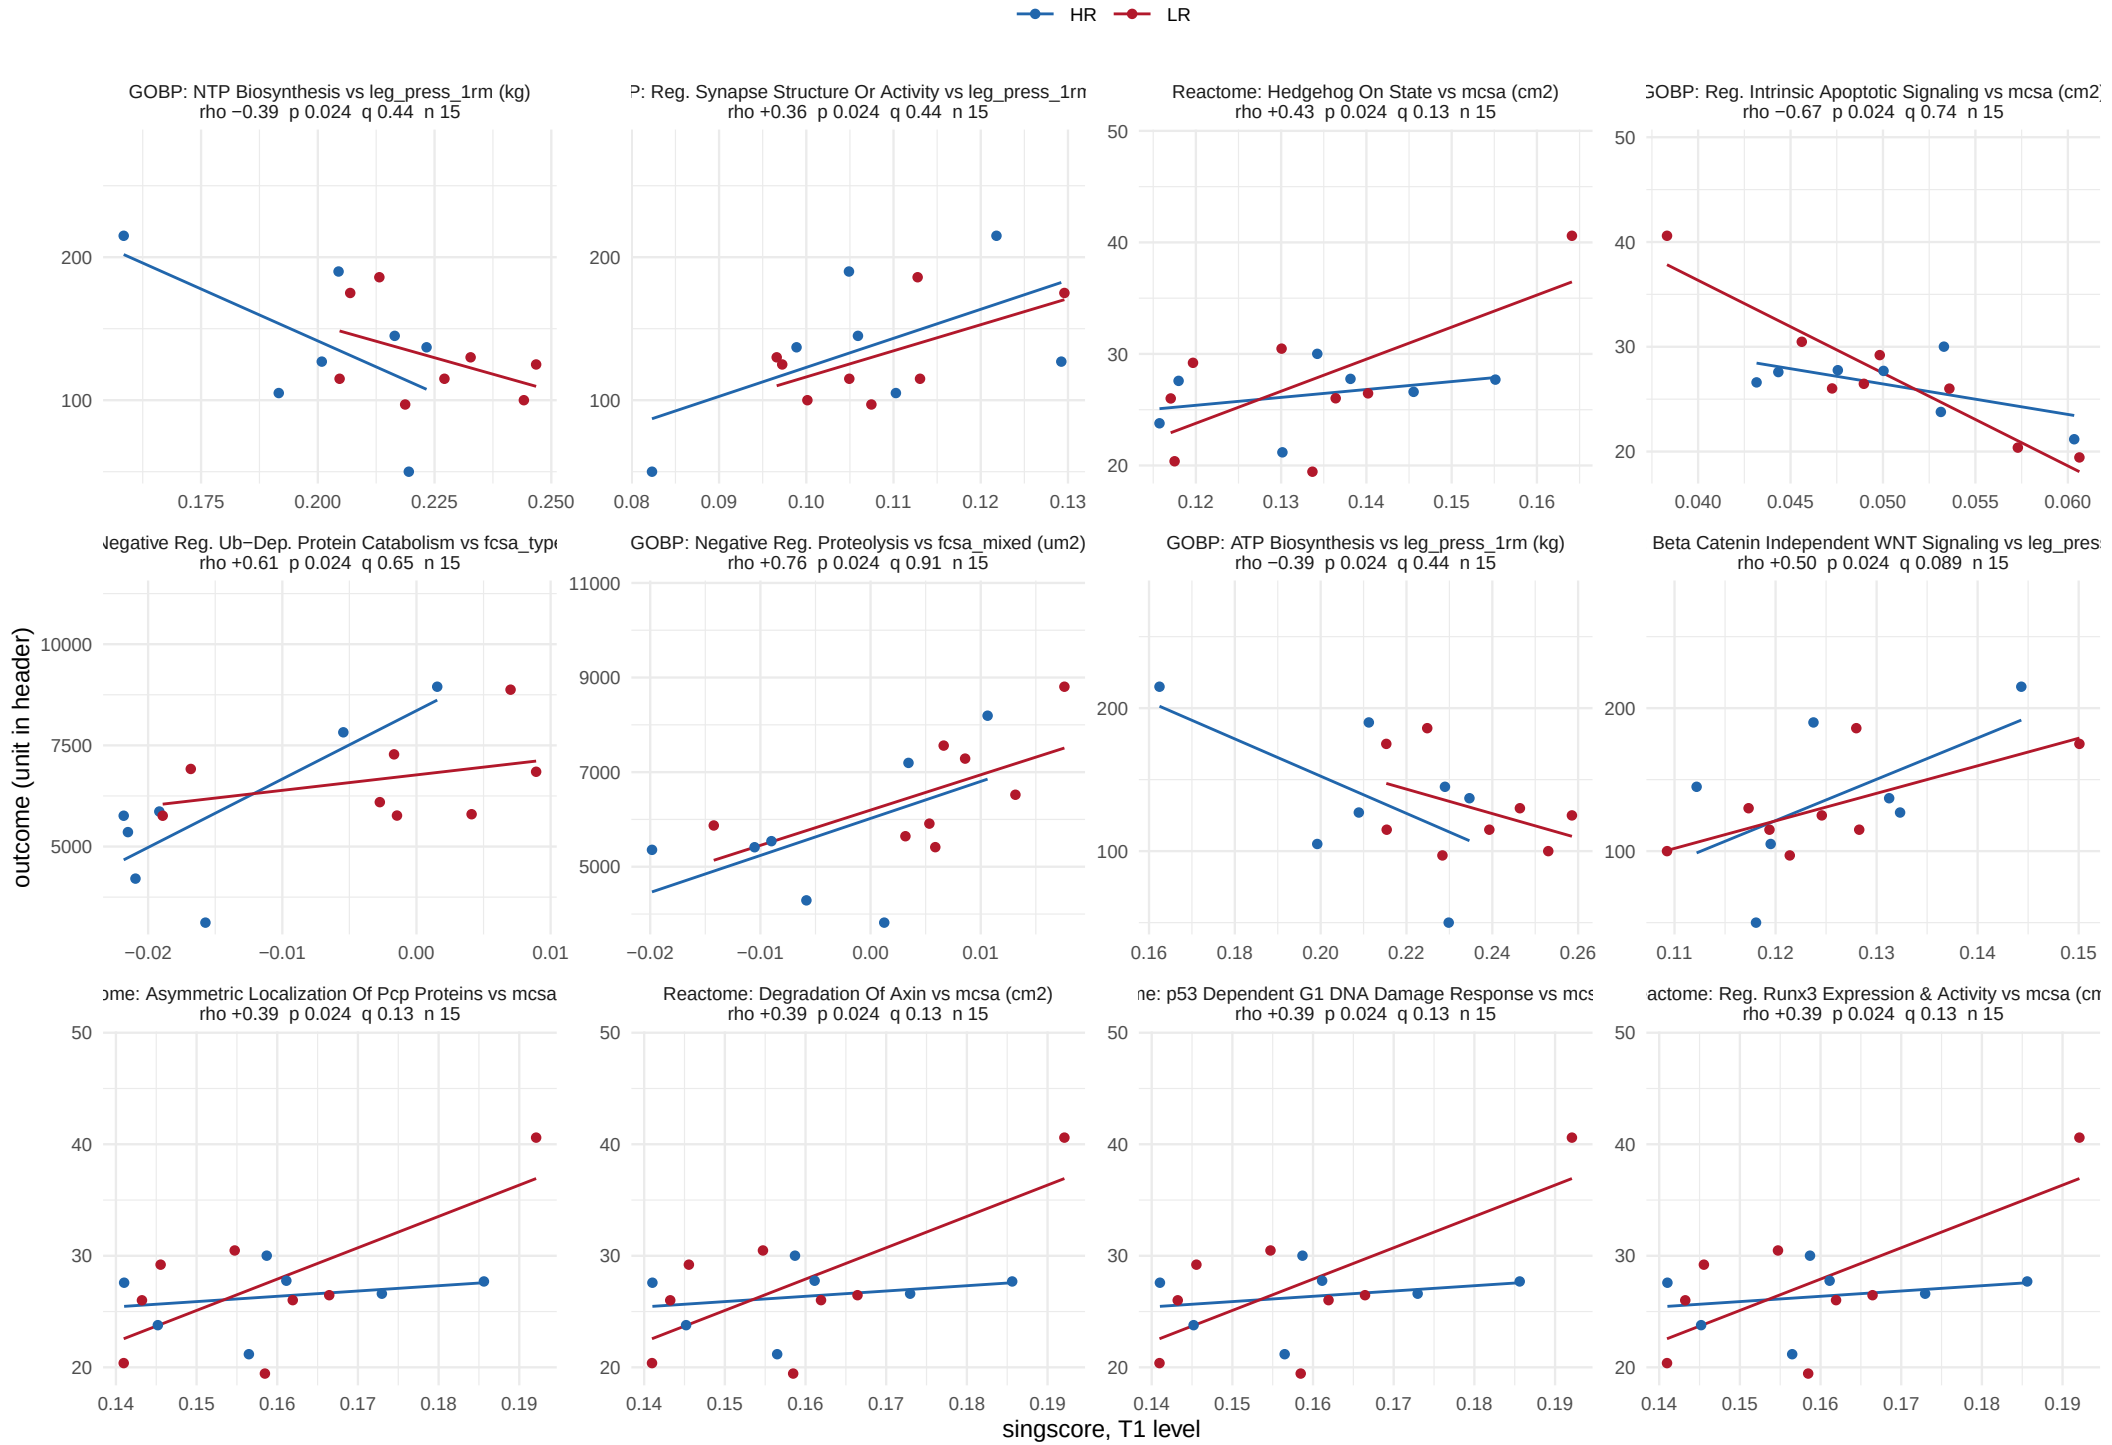

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window

653 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 29 of 55.

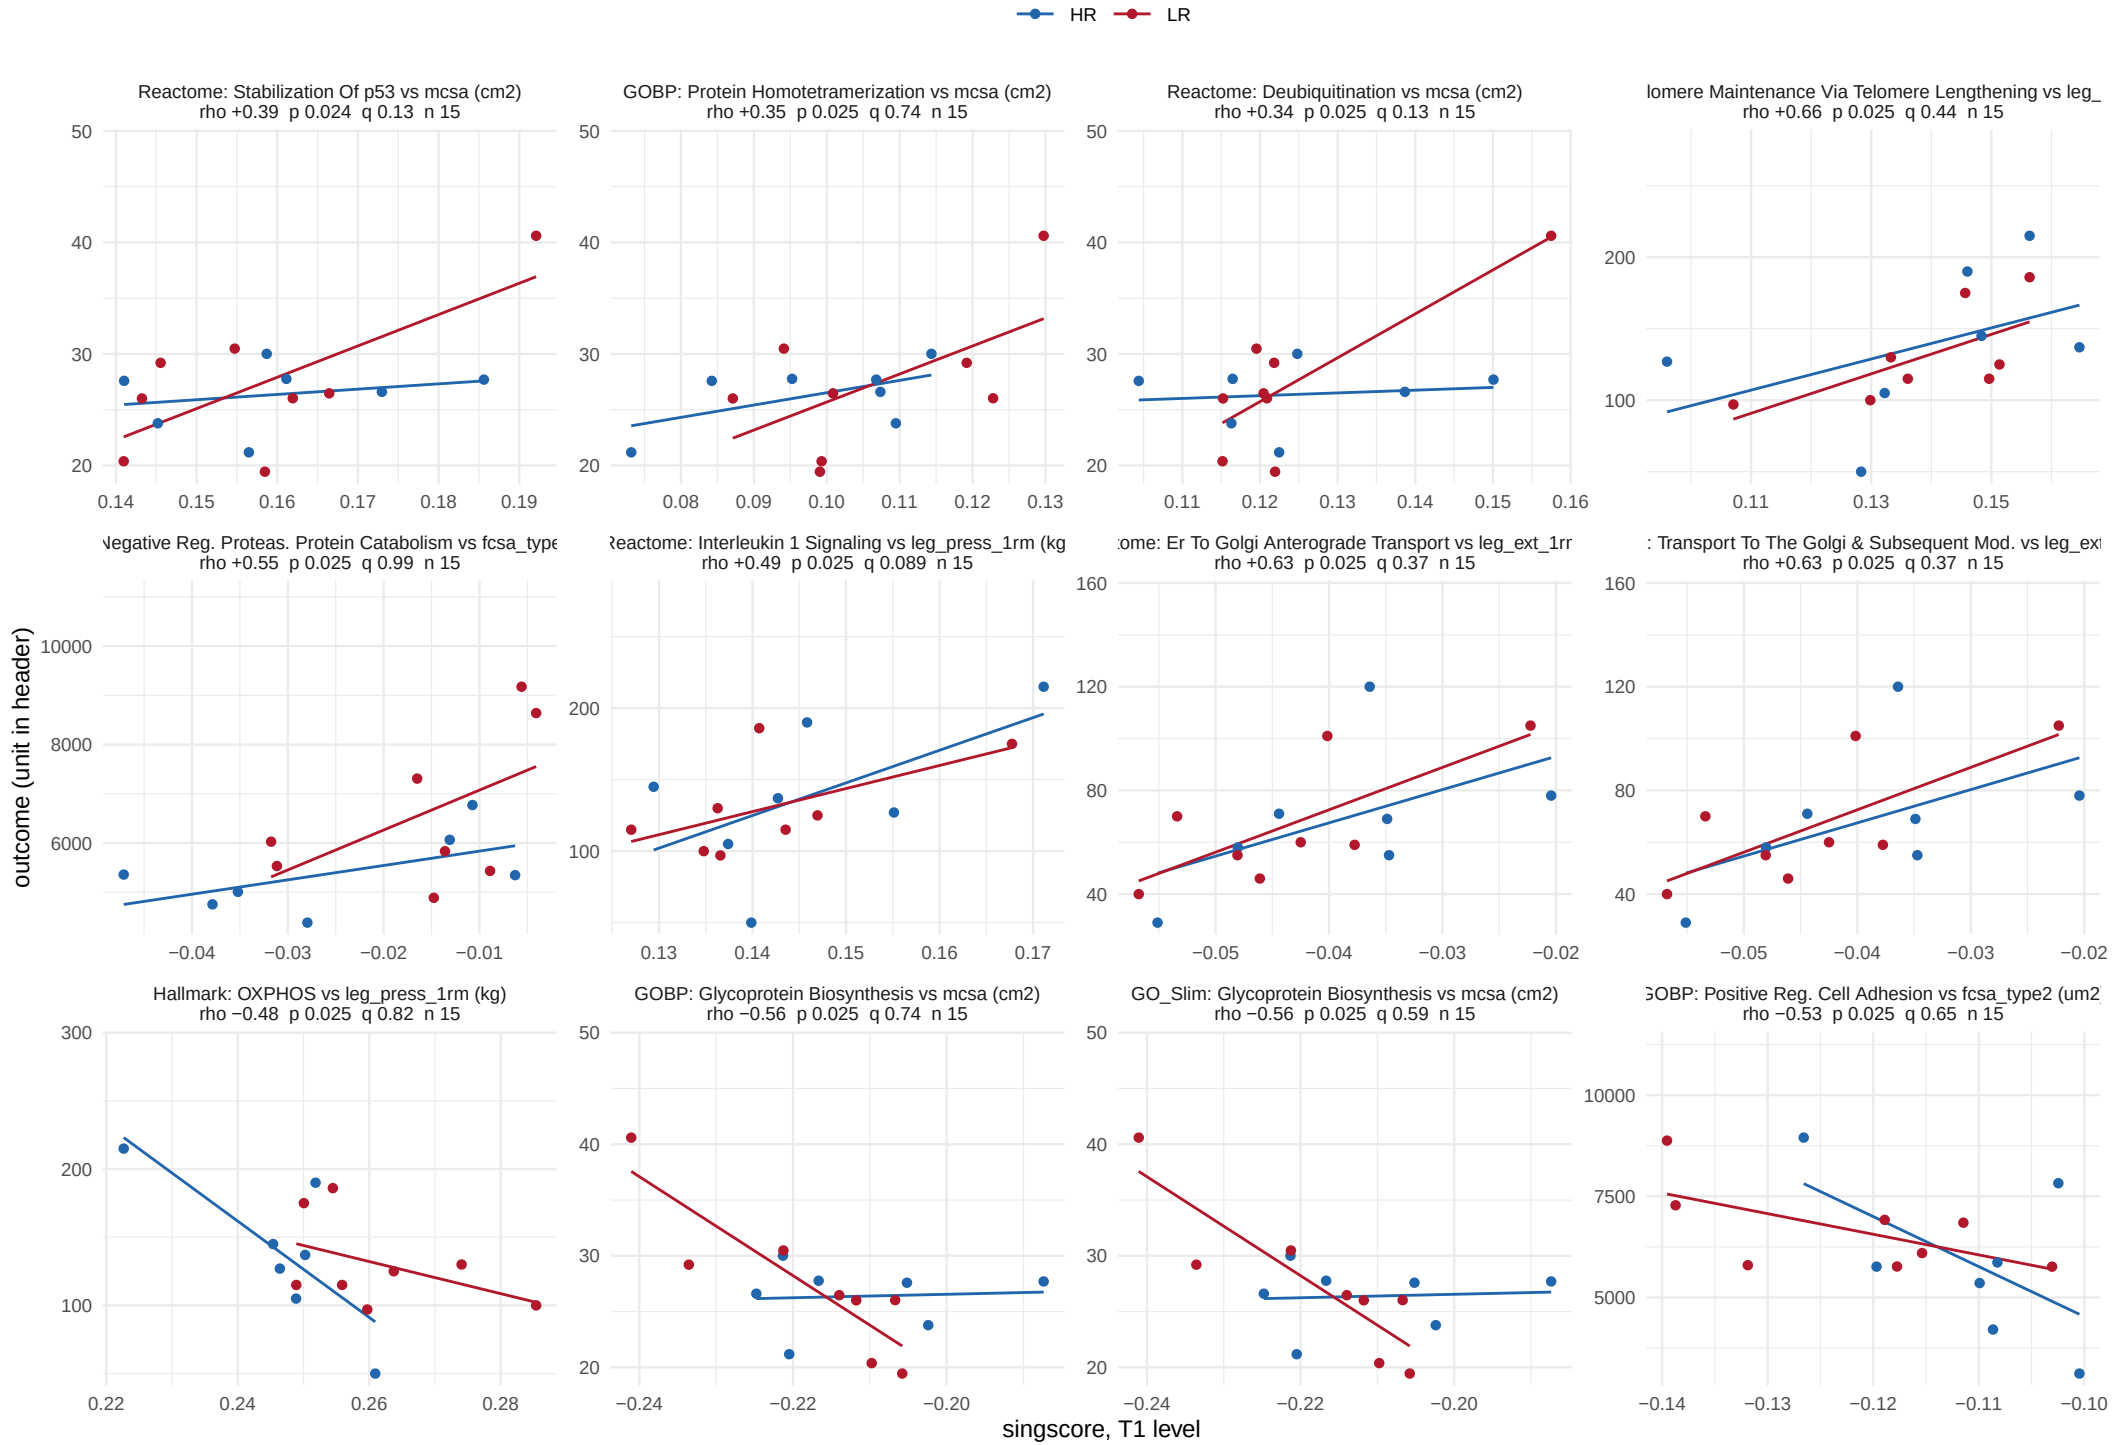

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


653 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 30 of 55.



One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


653 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 31 of 55.

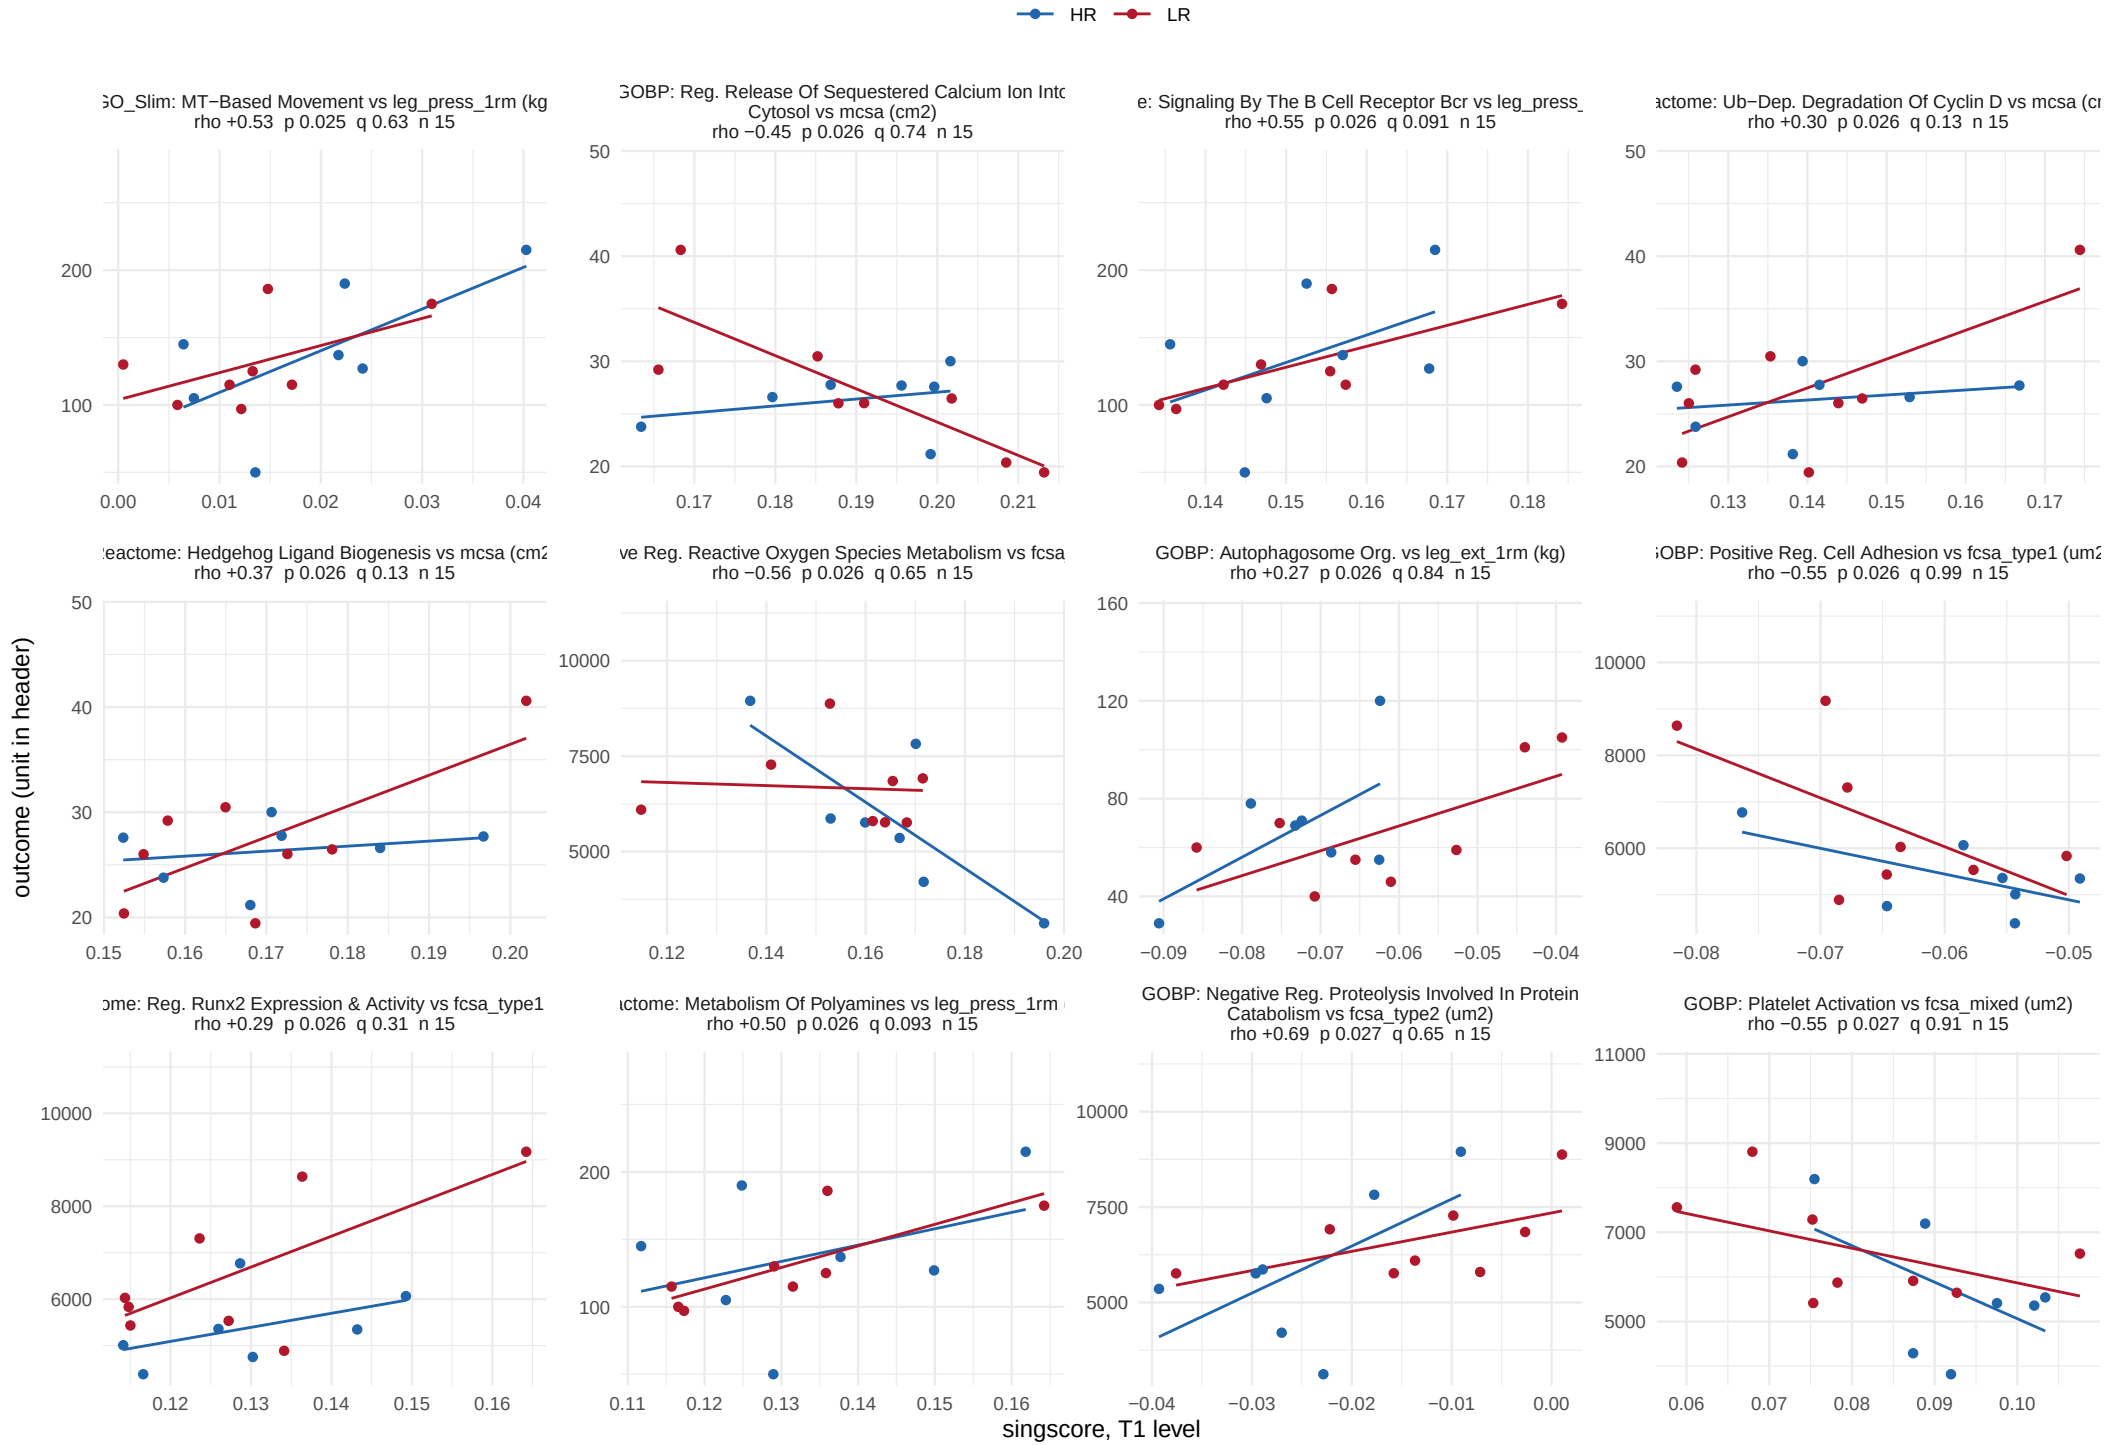

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window

653 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 32 of 55.

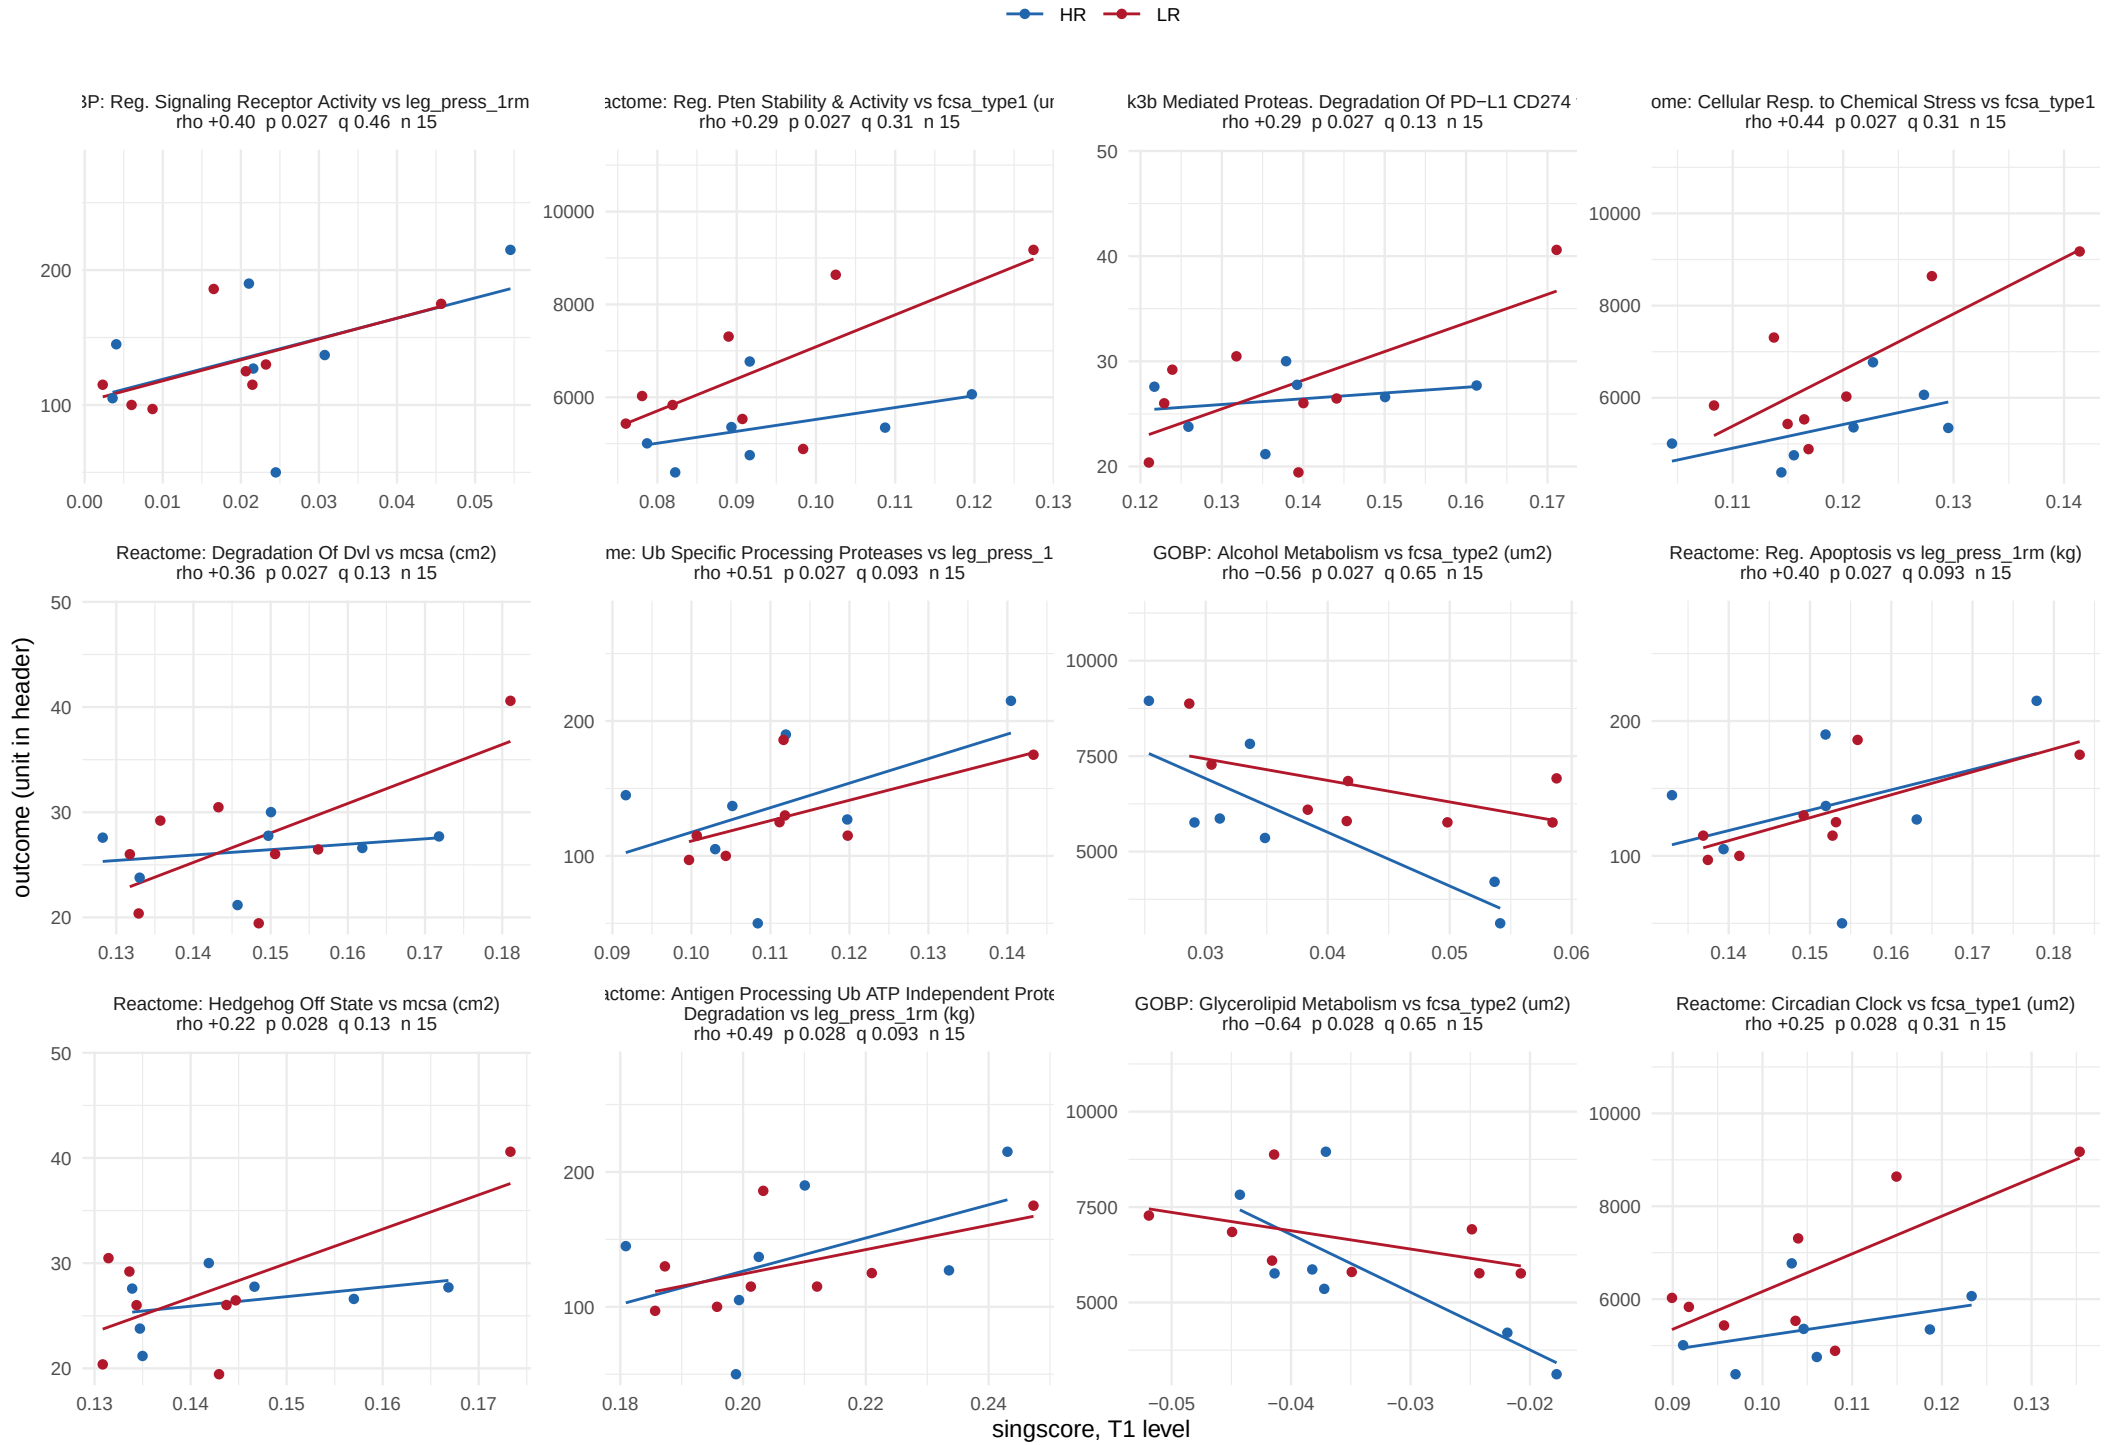

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


653 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 33 of 55.



One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


653 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 34 of 55.

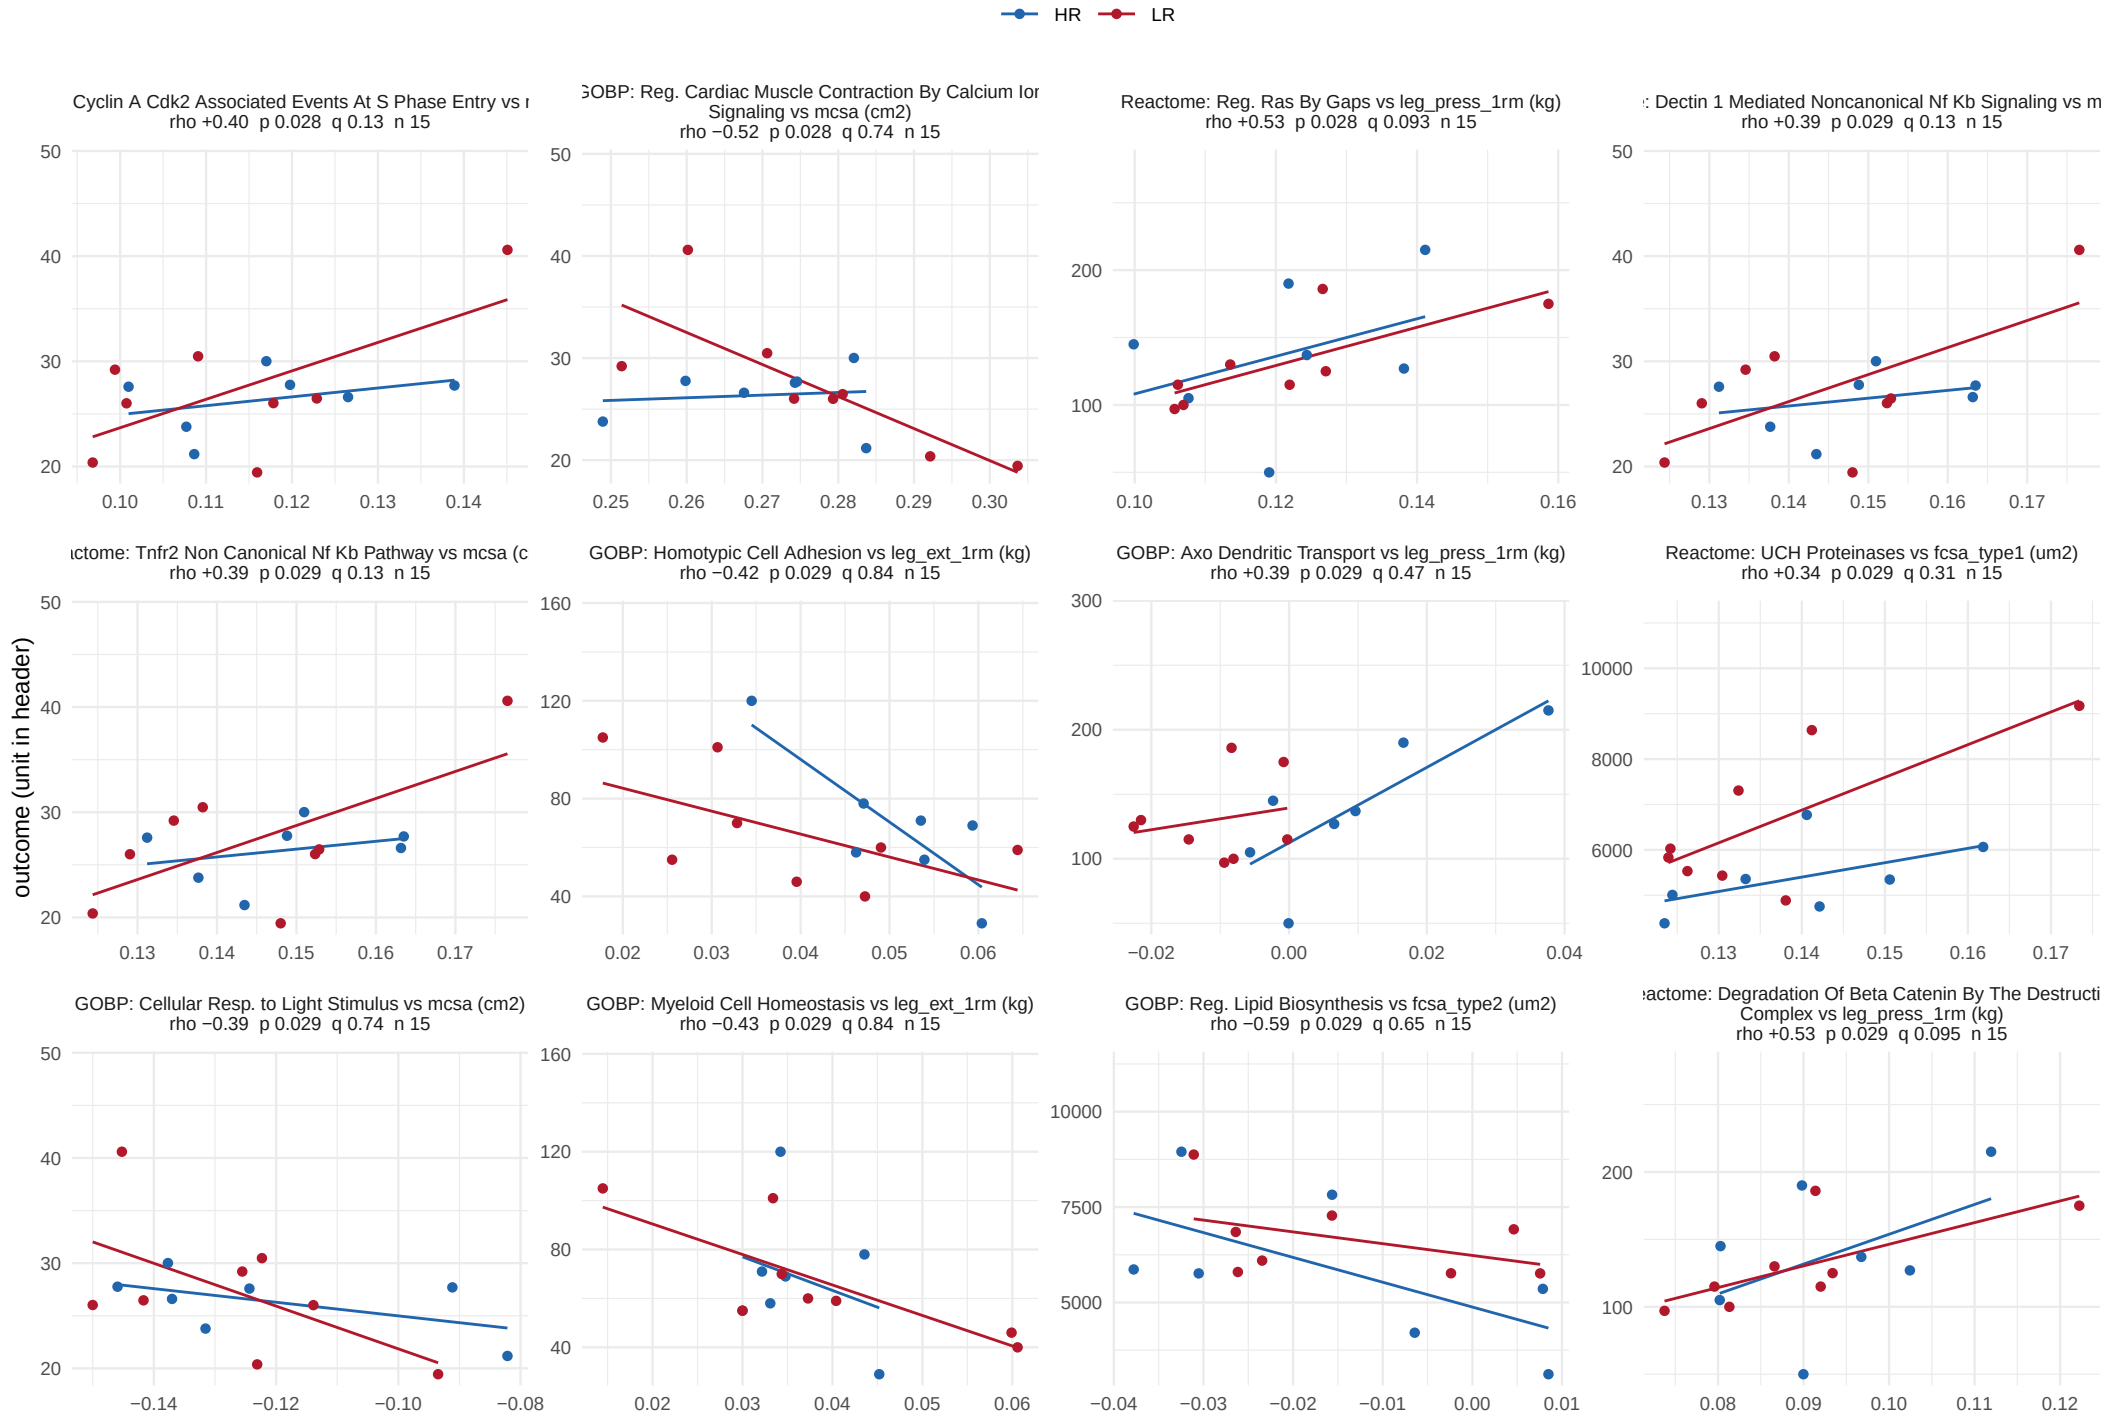

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


653 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 35 of 55.

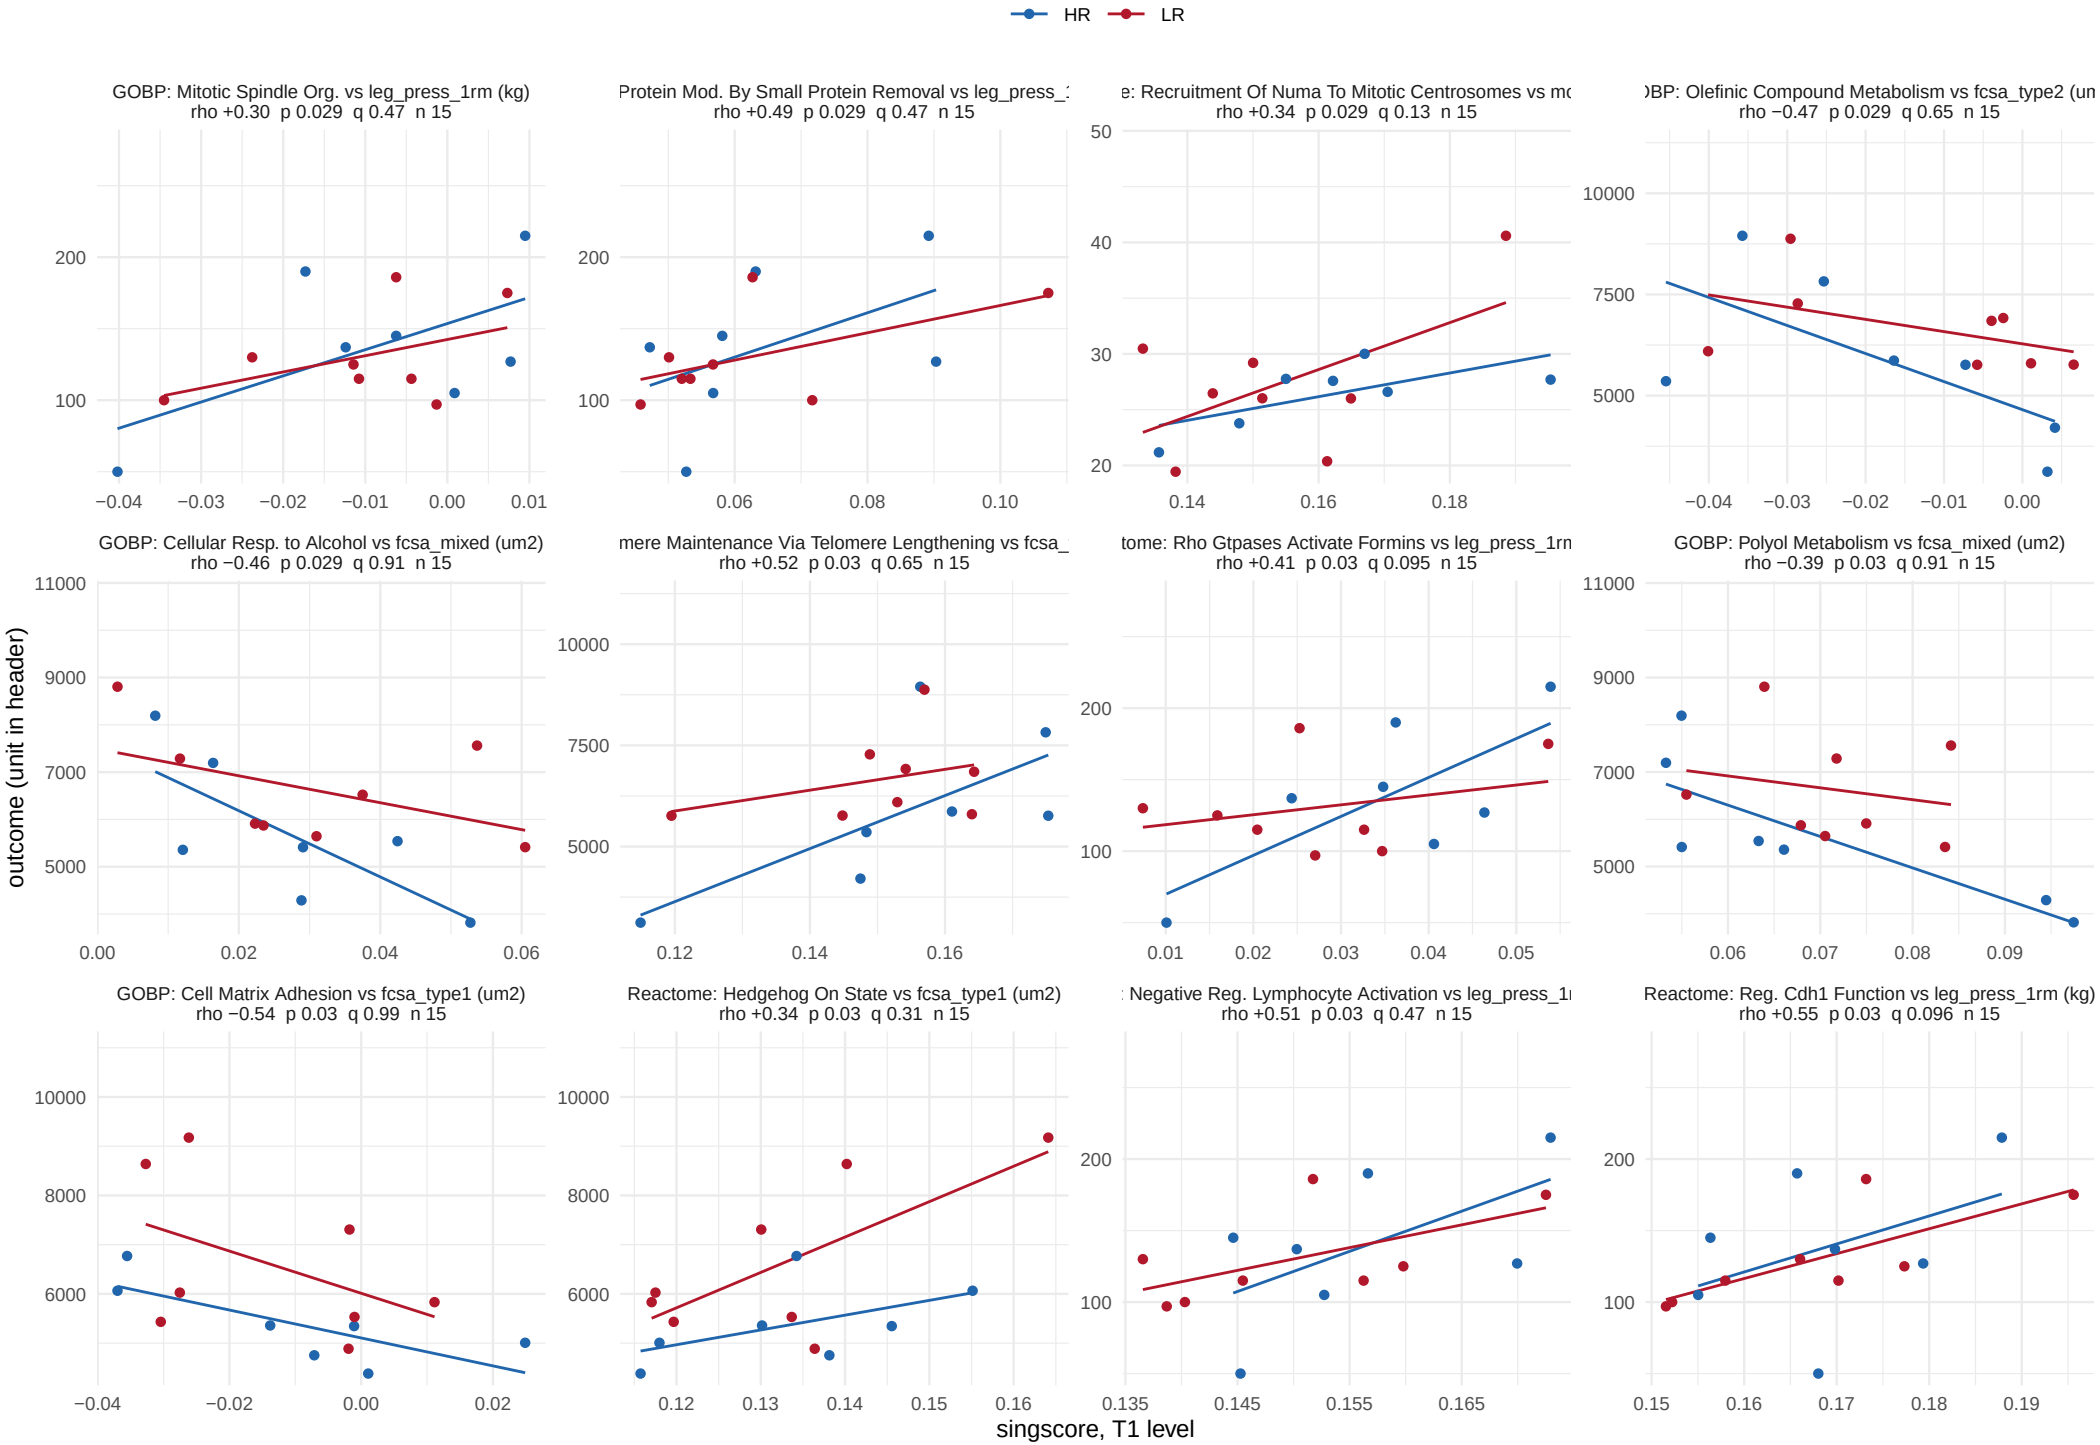

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


653 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 36 of 55.

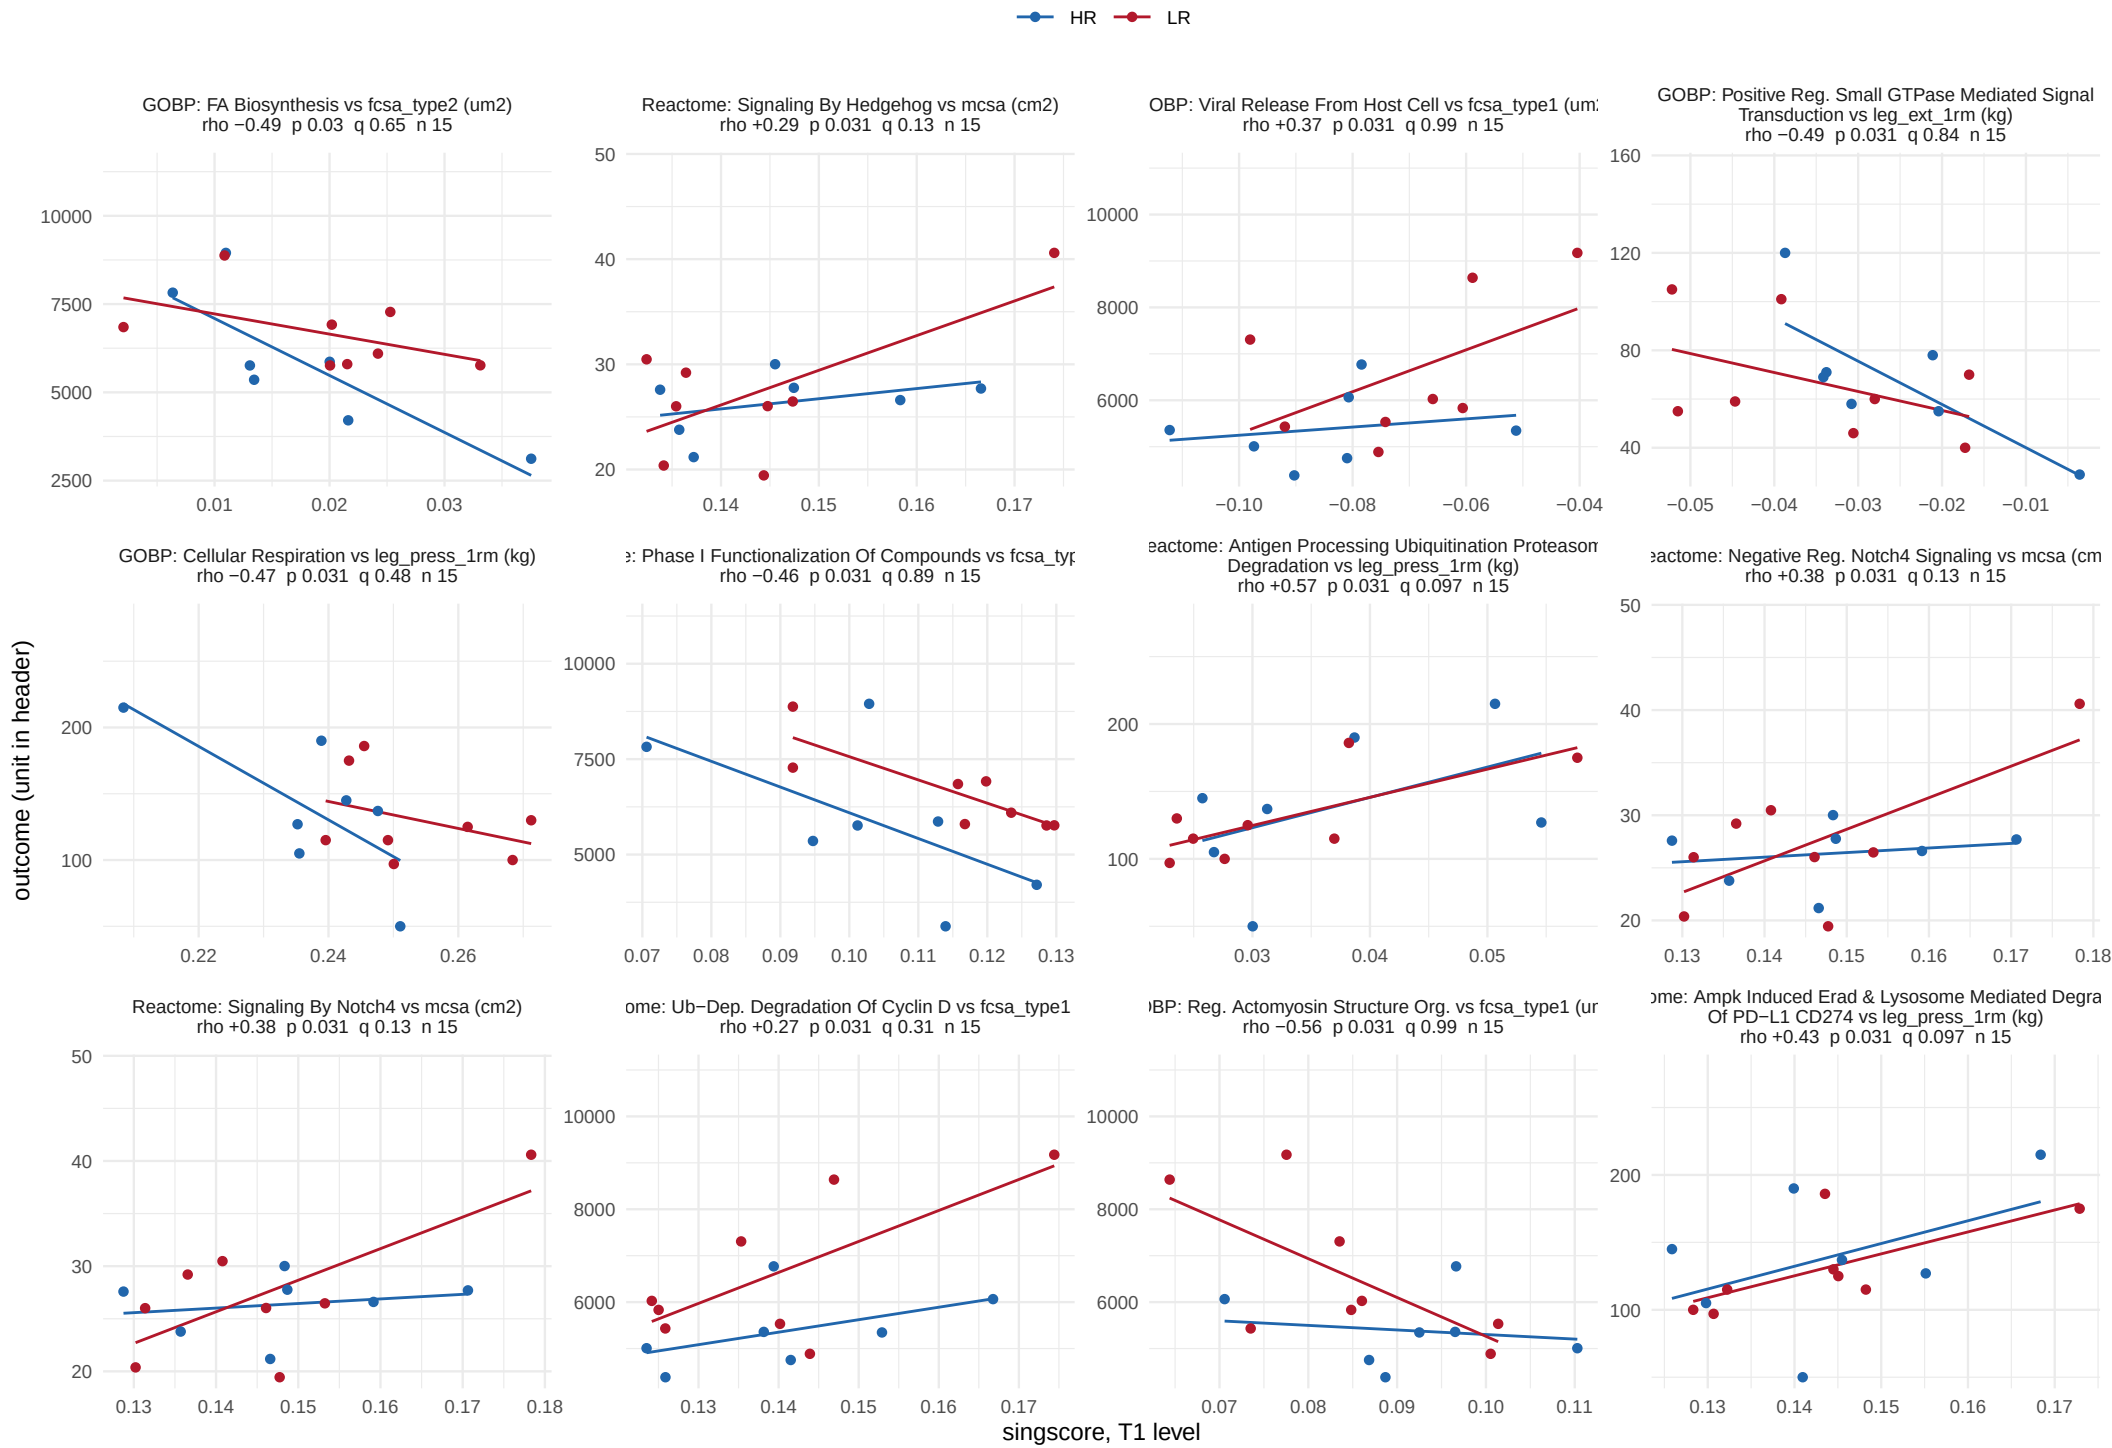

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


653 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 37 of 55.

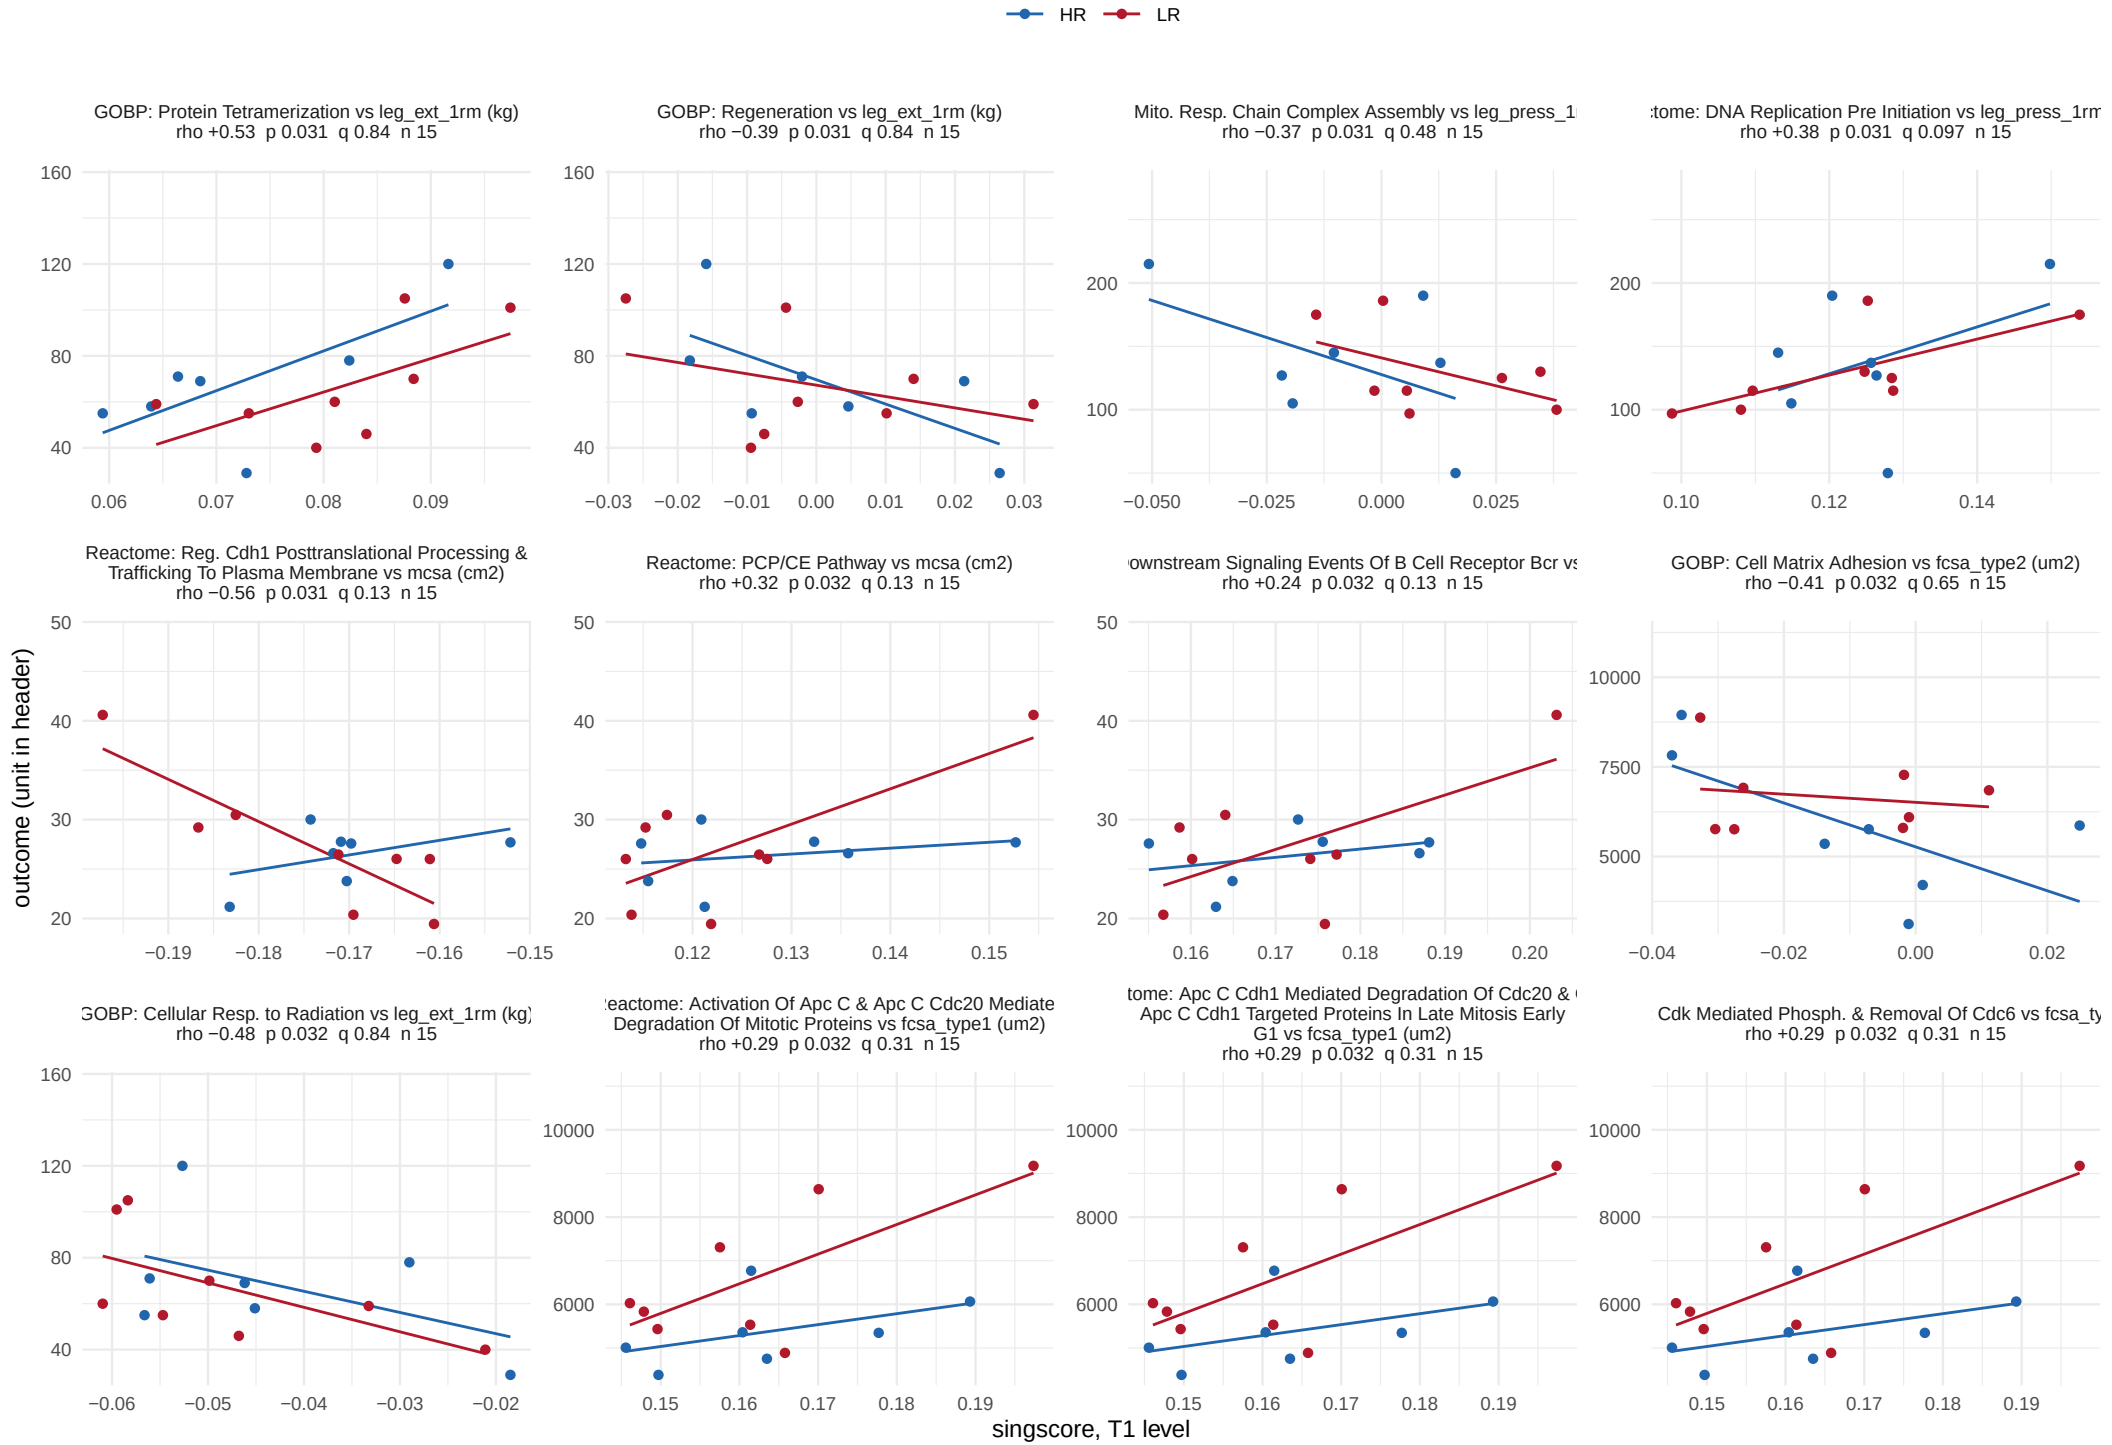

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


653 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 38 of 55.

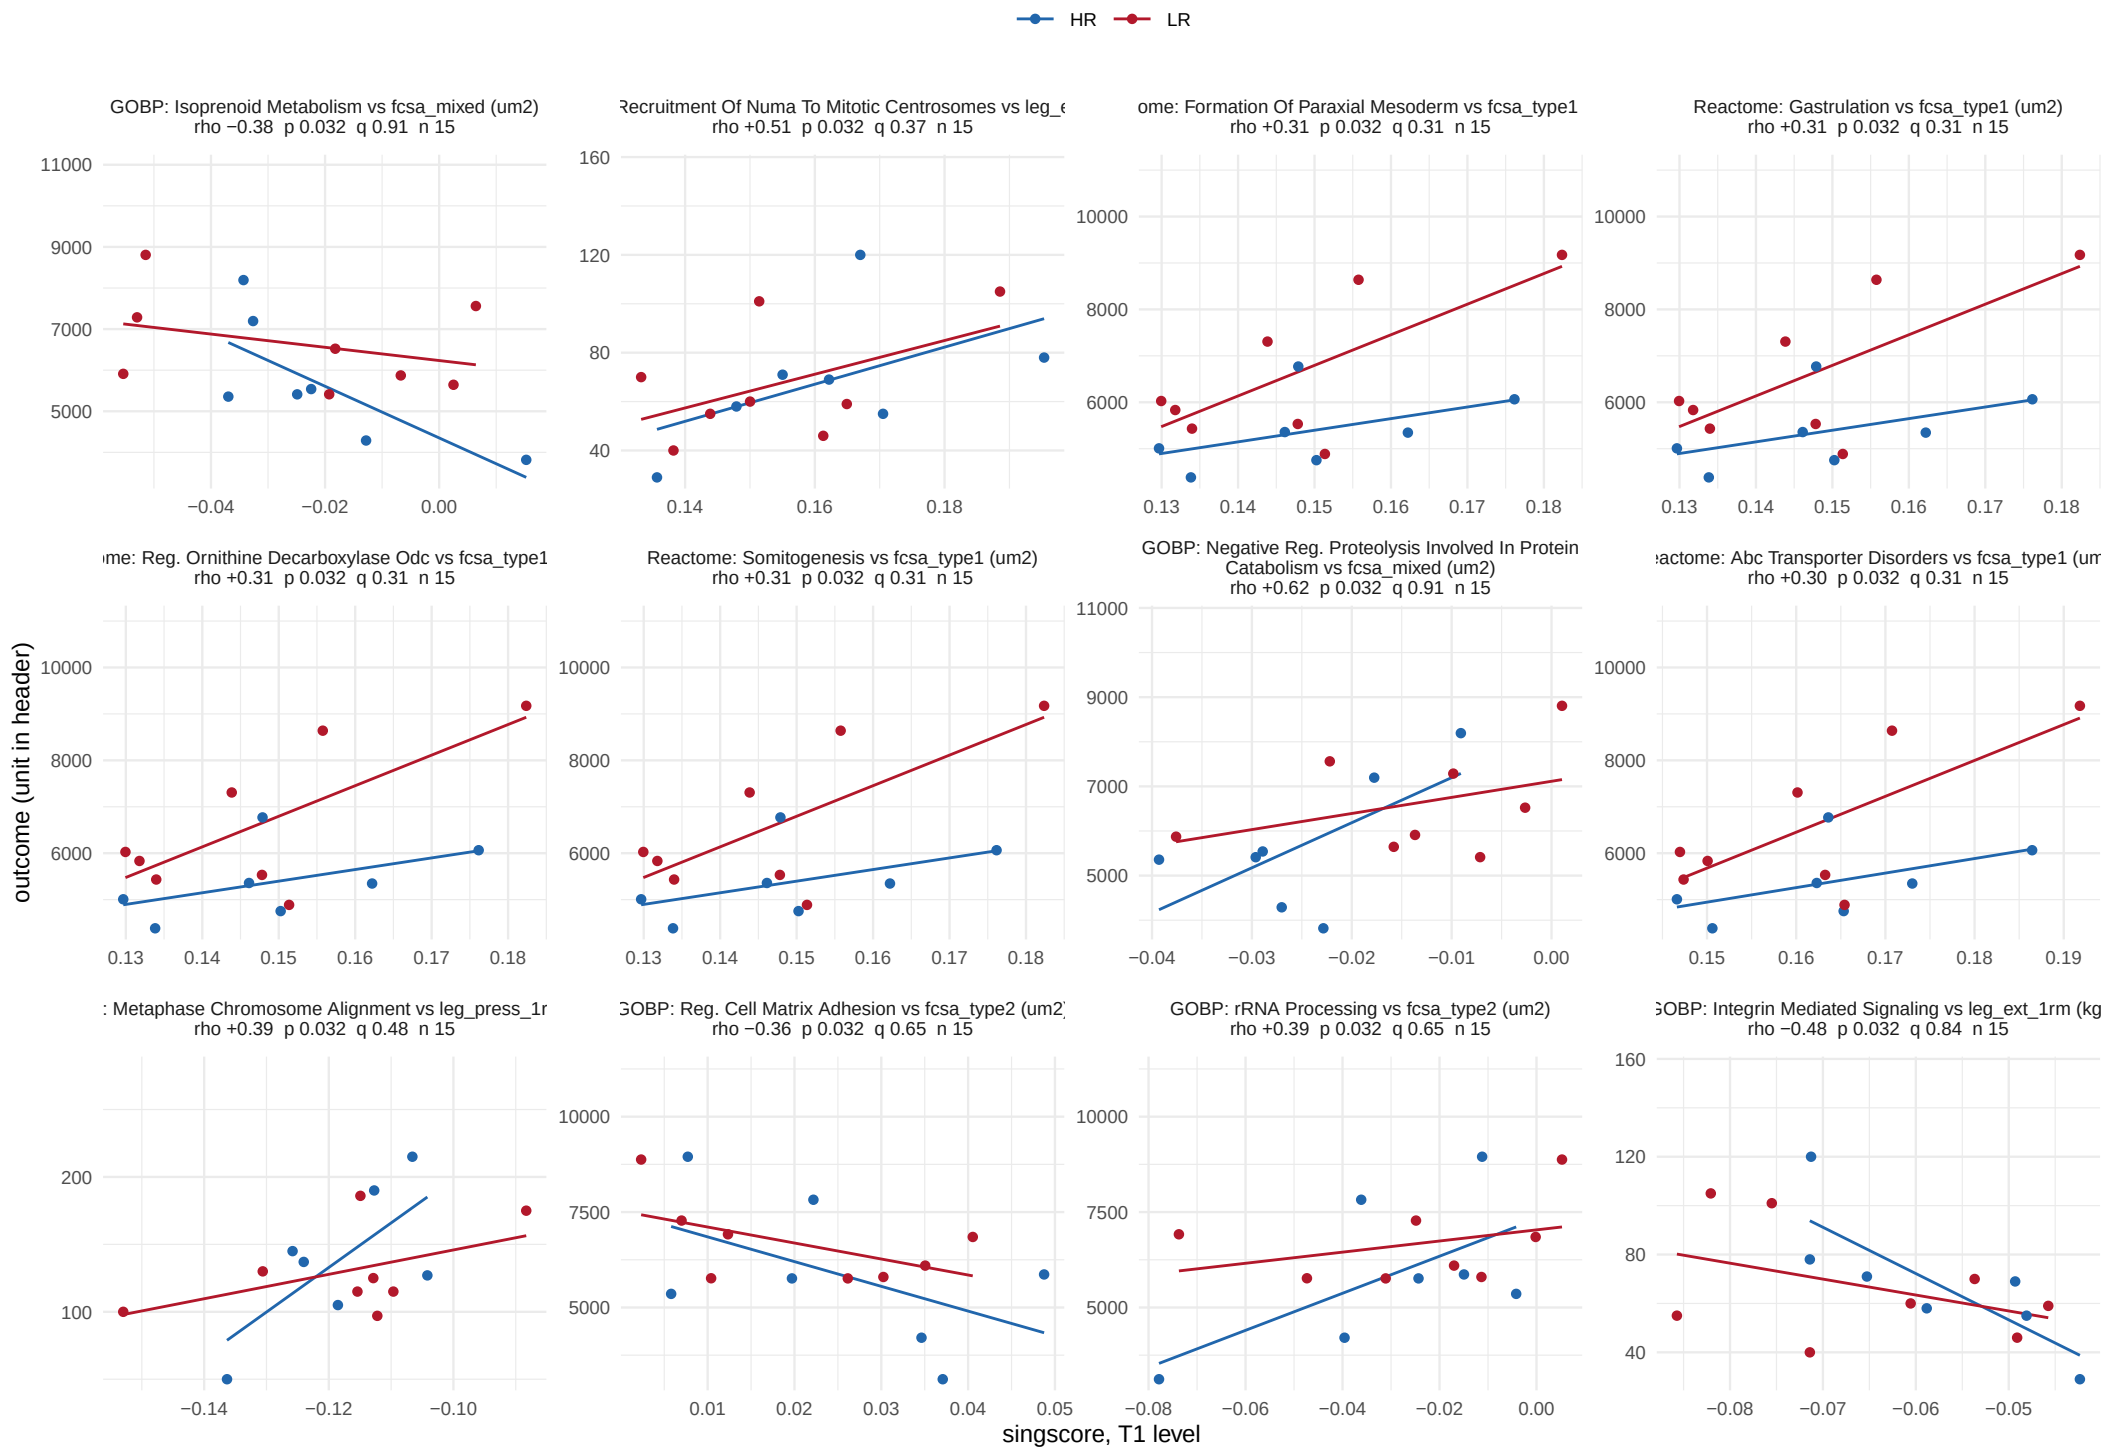

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


653 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 39 of 55.

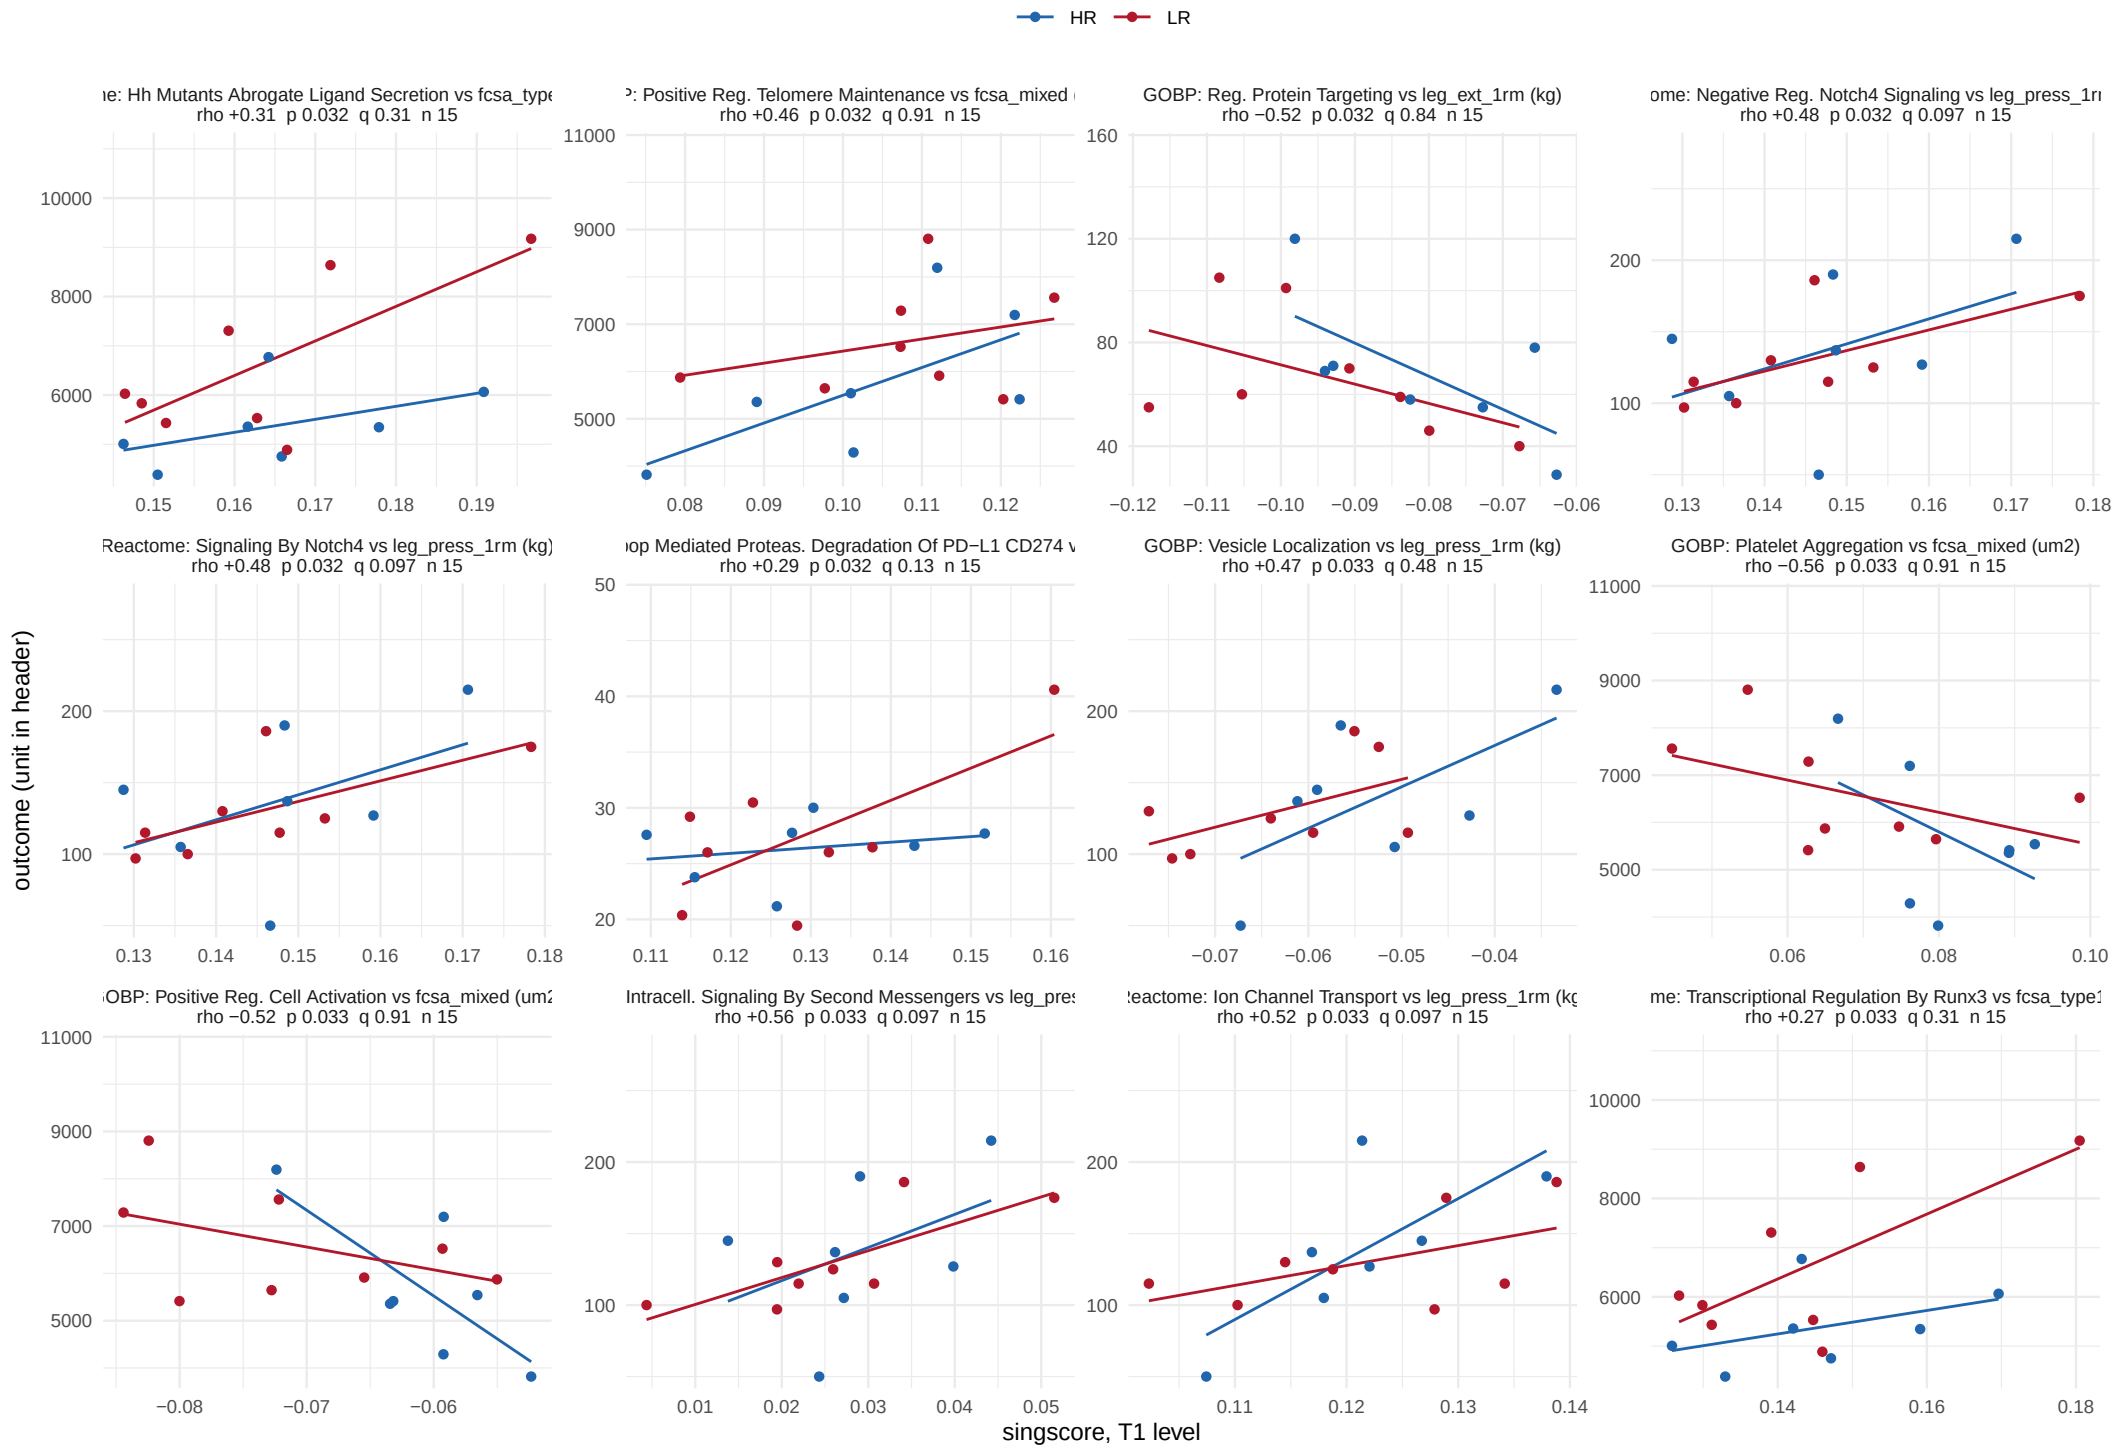

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


653 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 40 of 55.

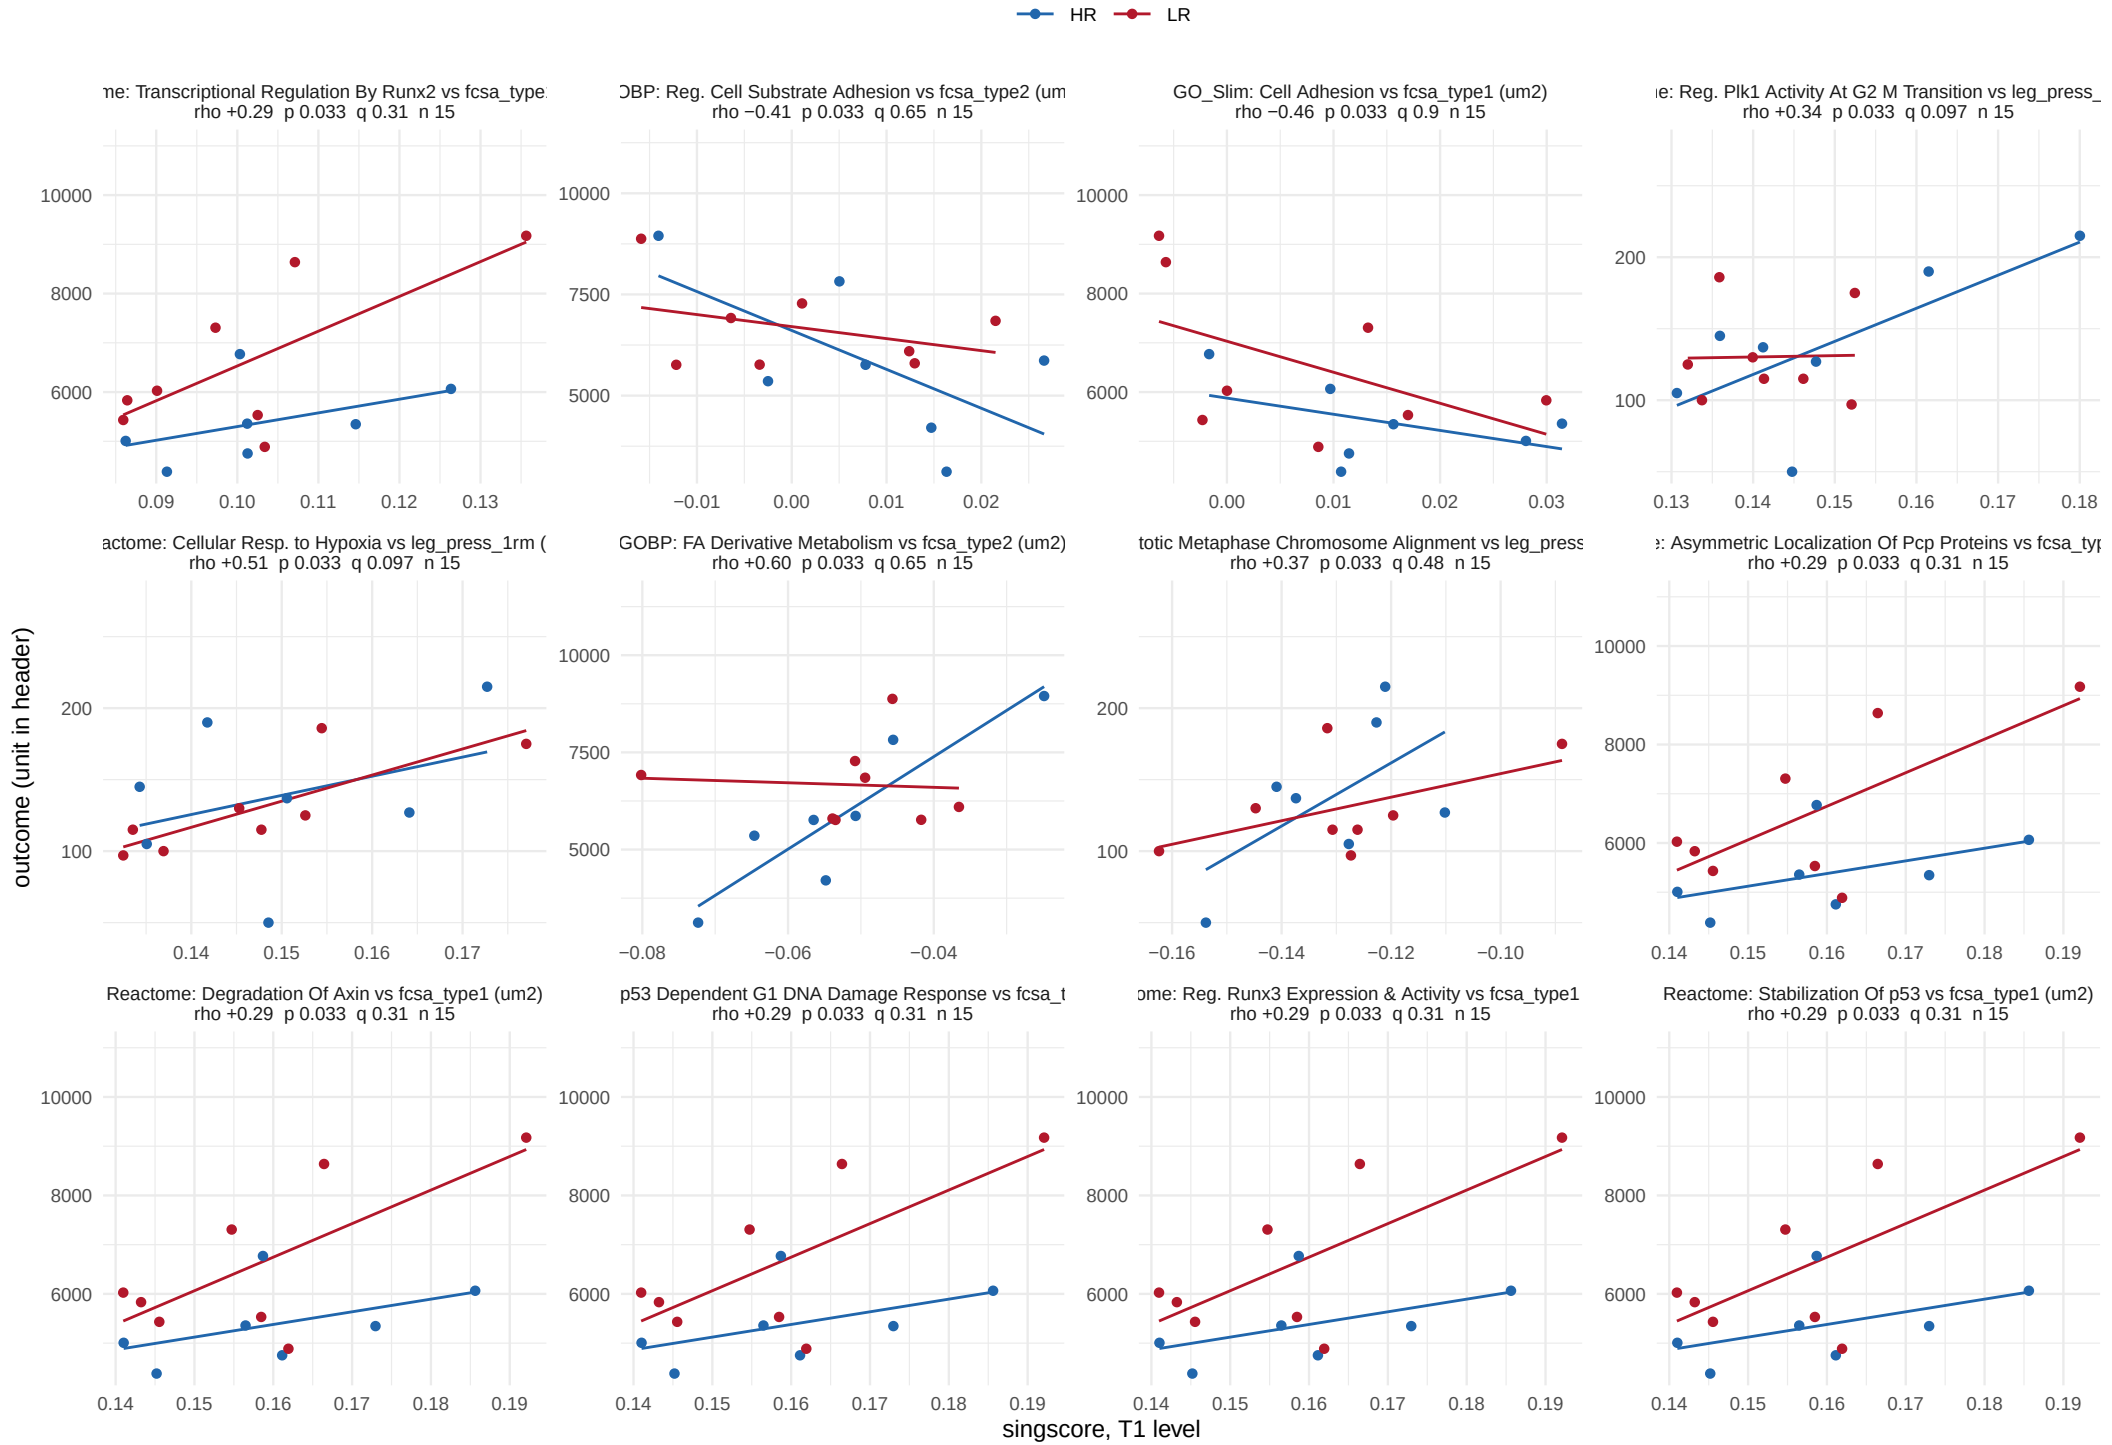

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


653 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 41 of 55.

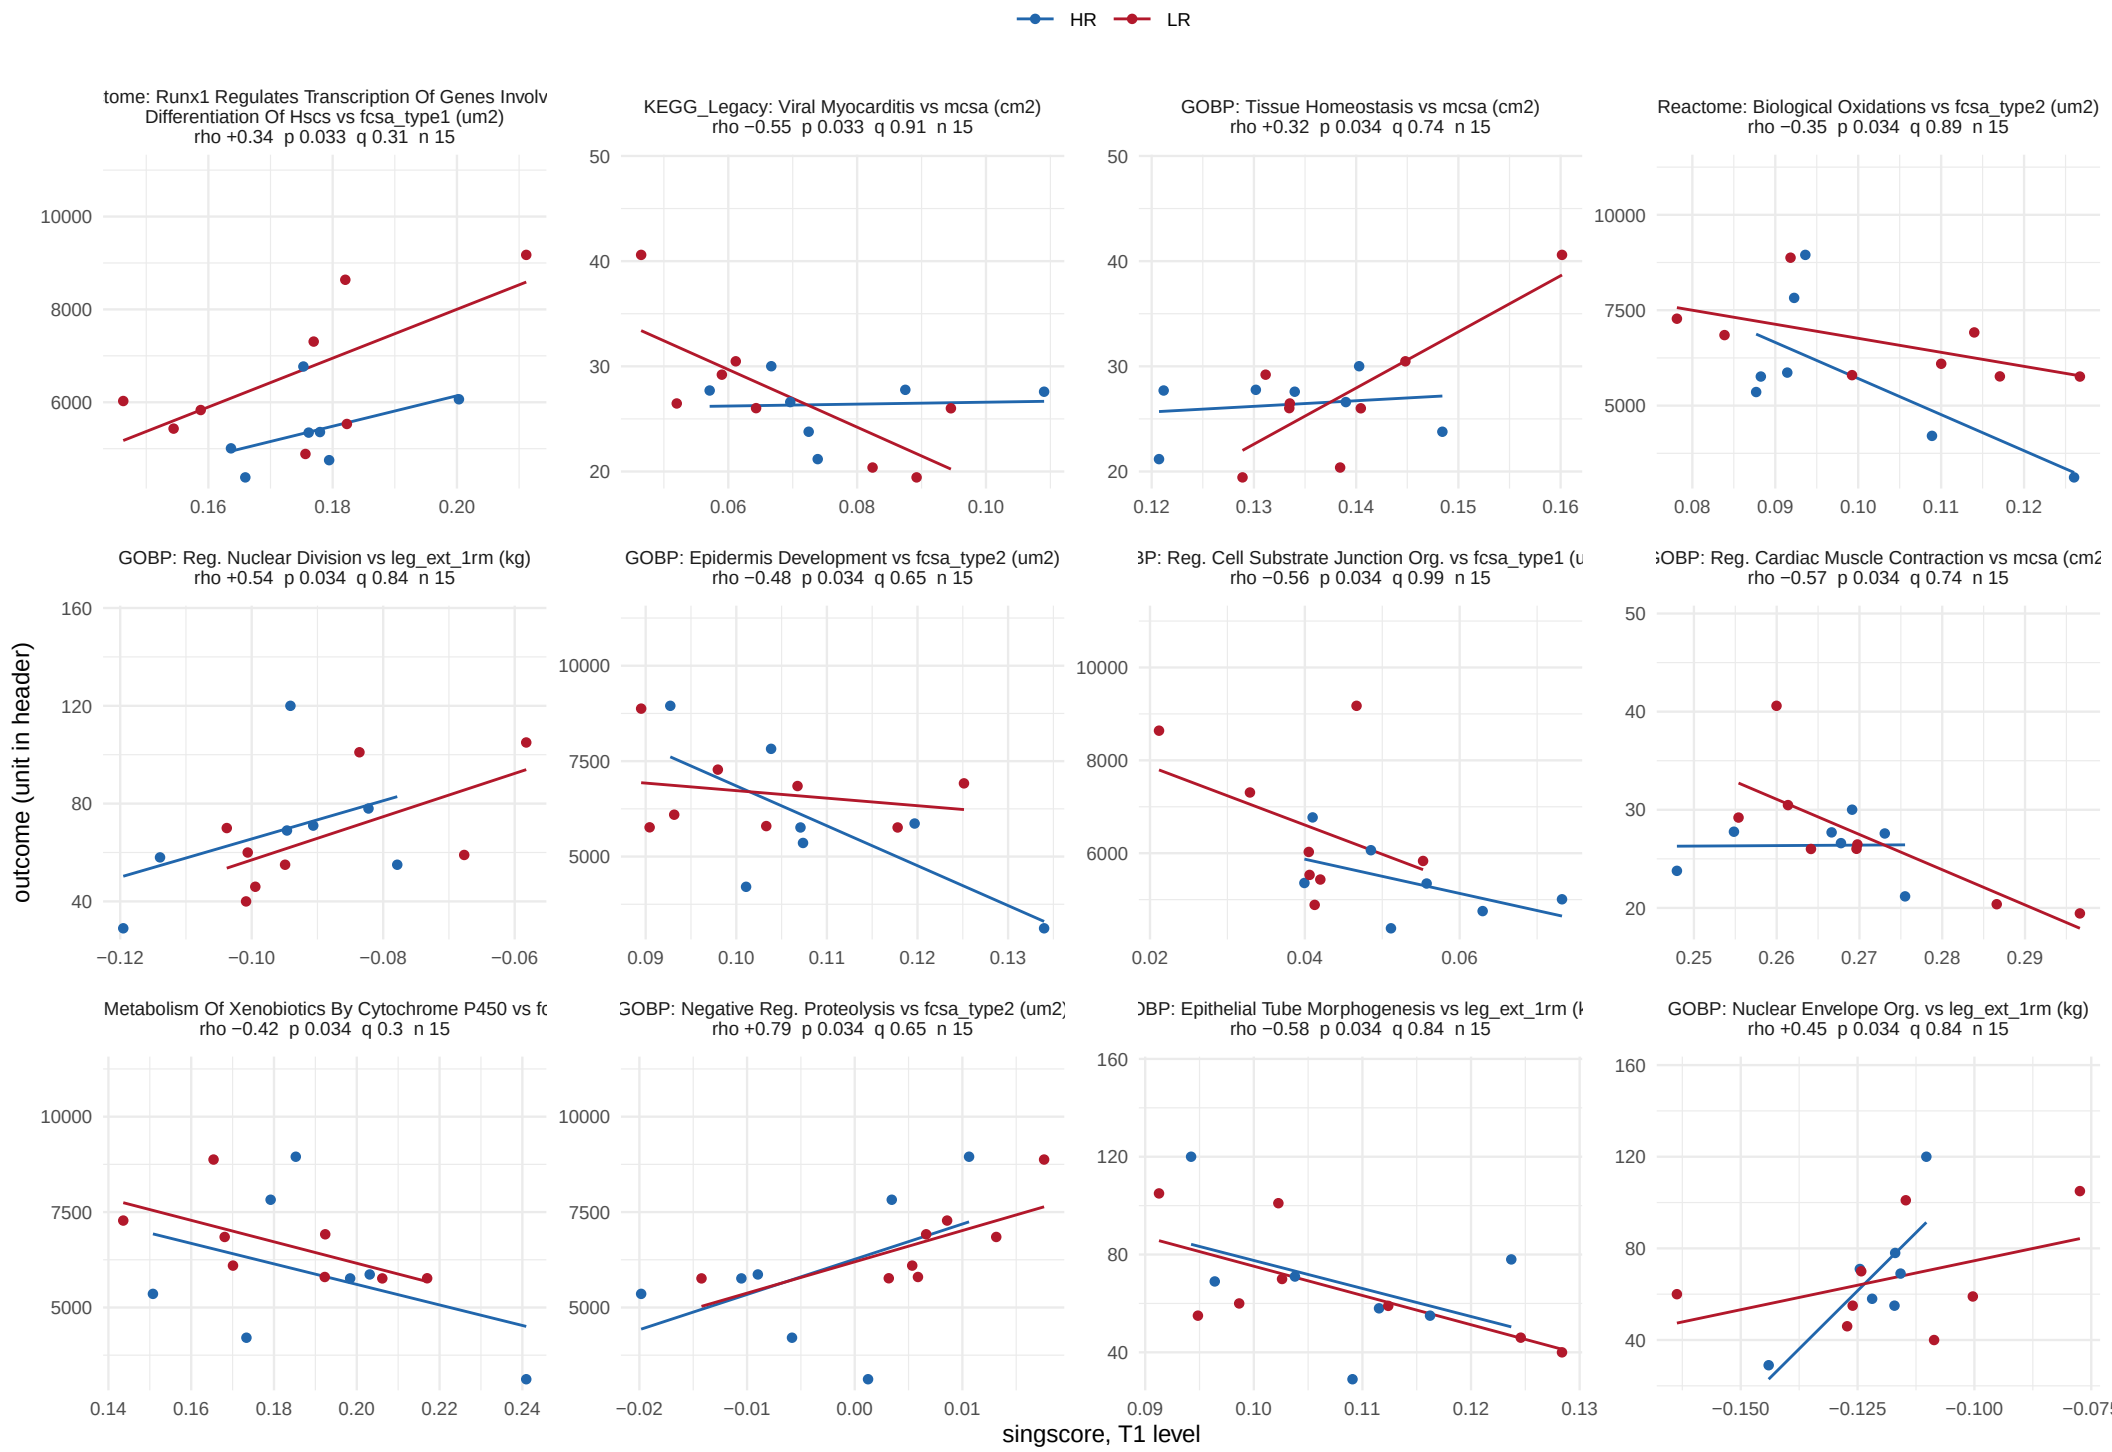

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


653 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 42 of 55.

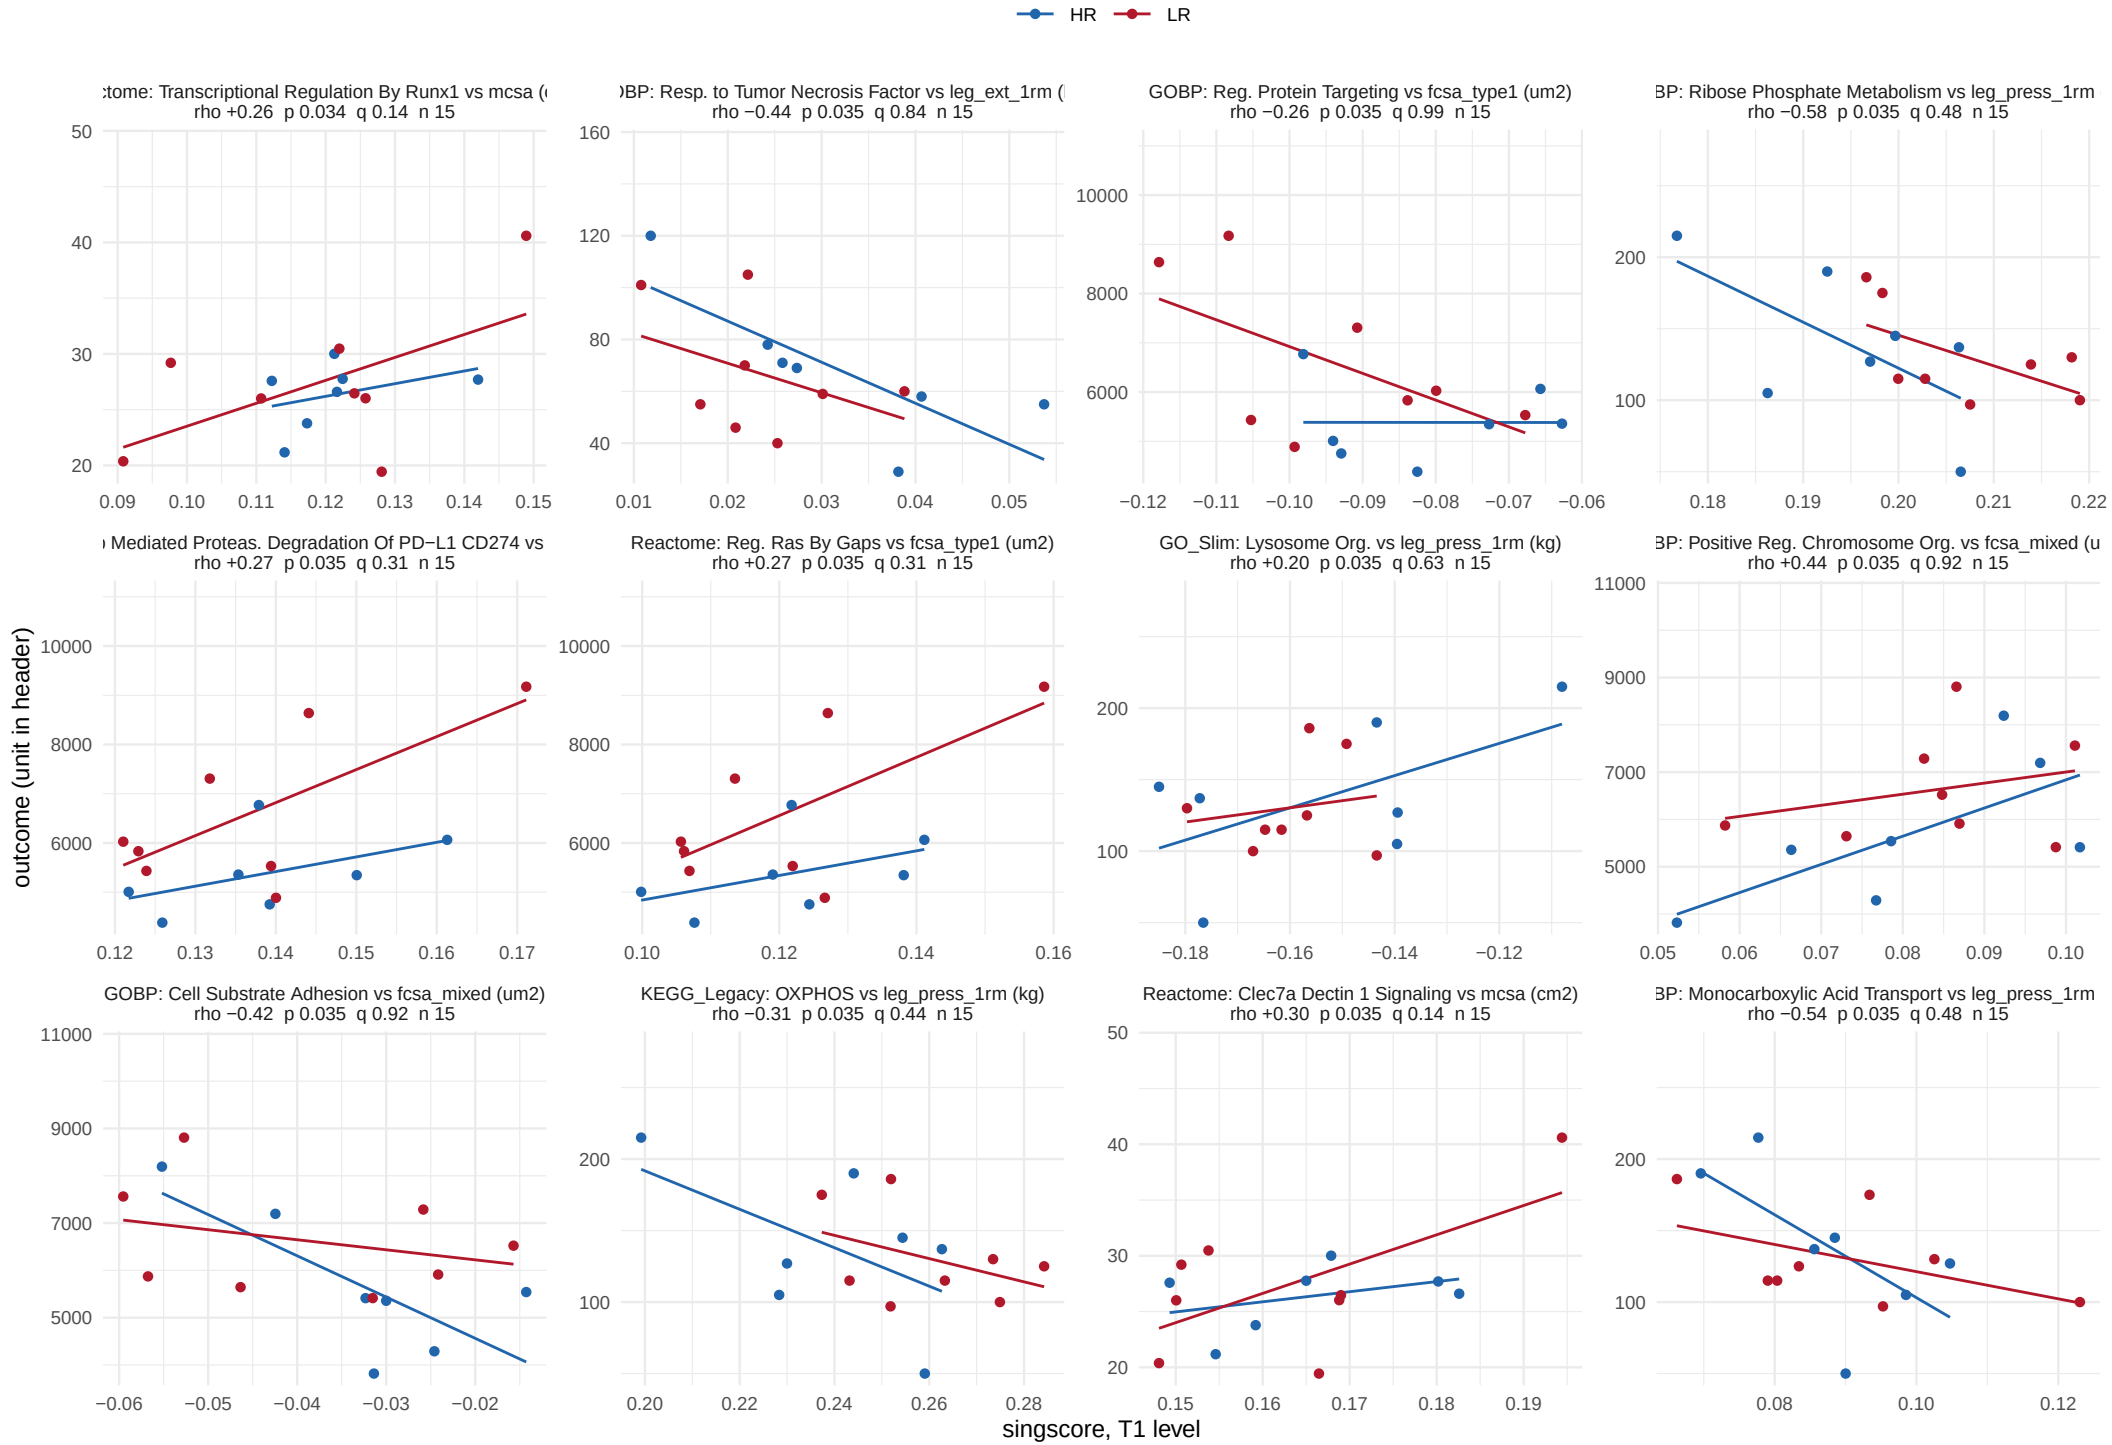

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


653 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 43 of 55.

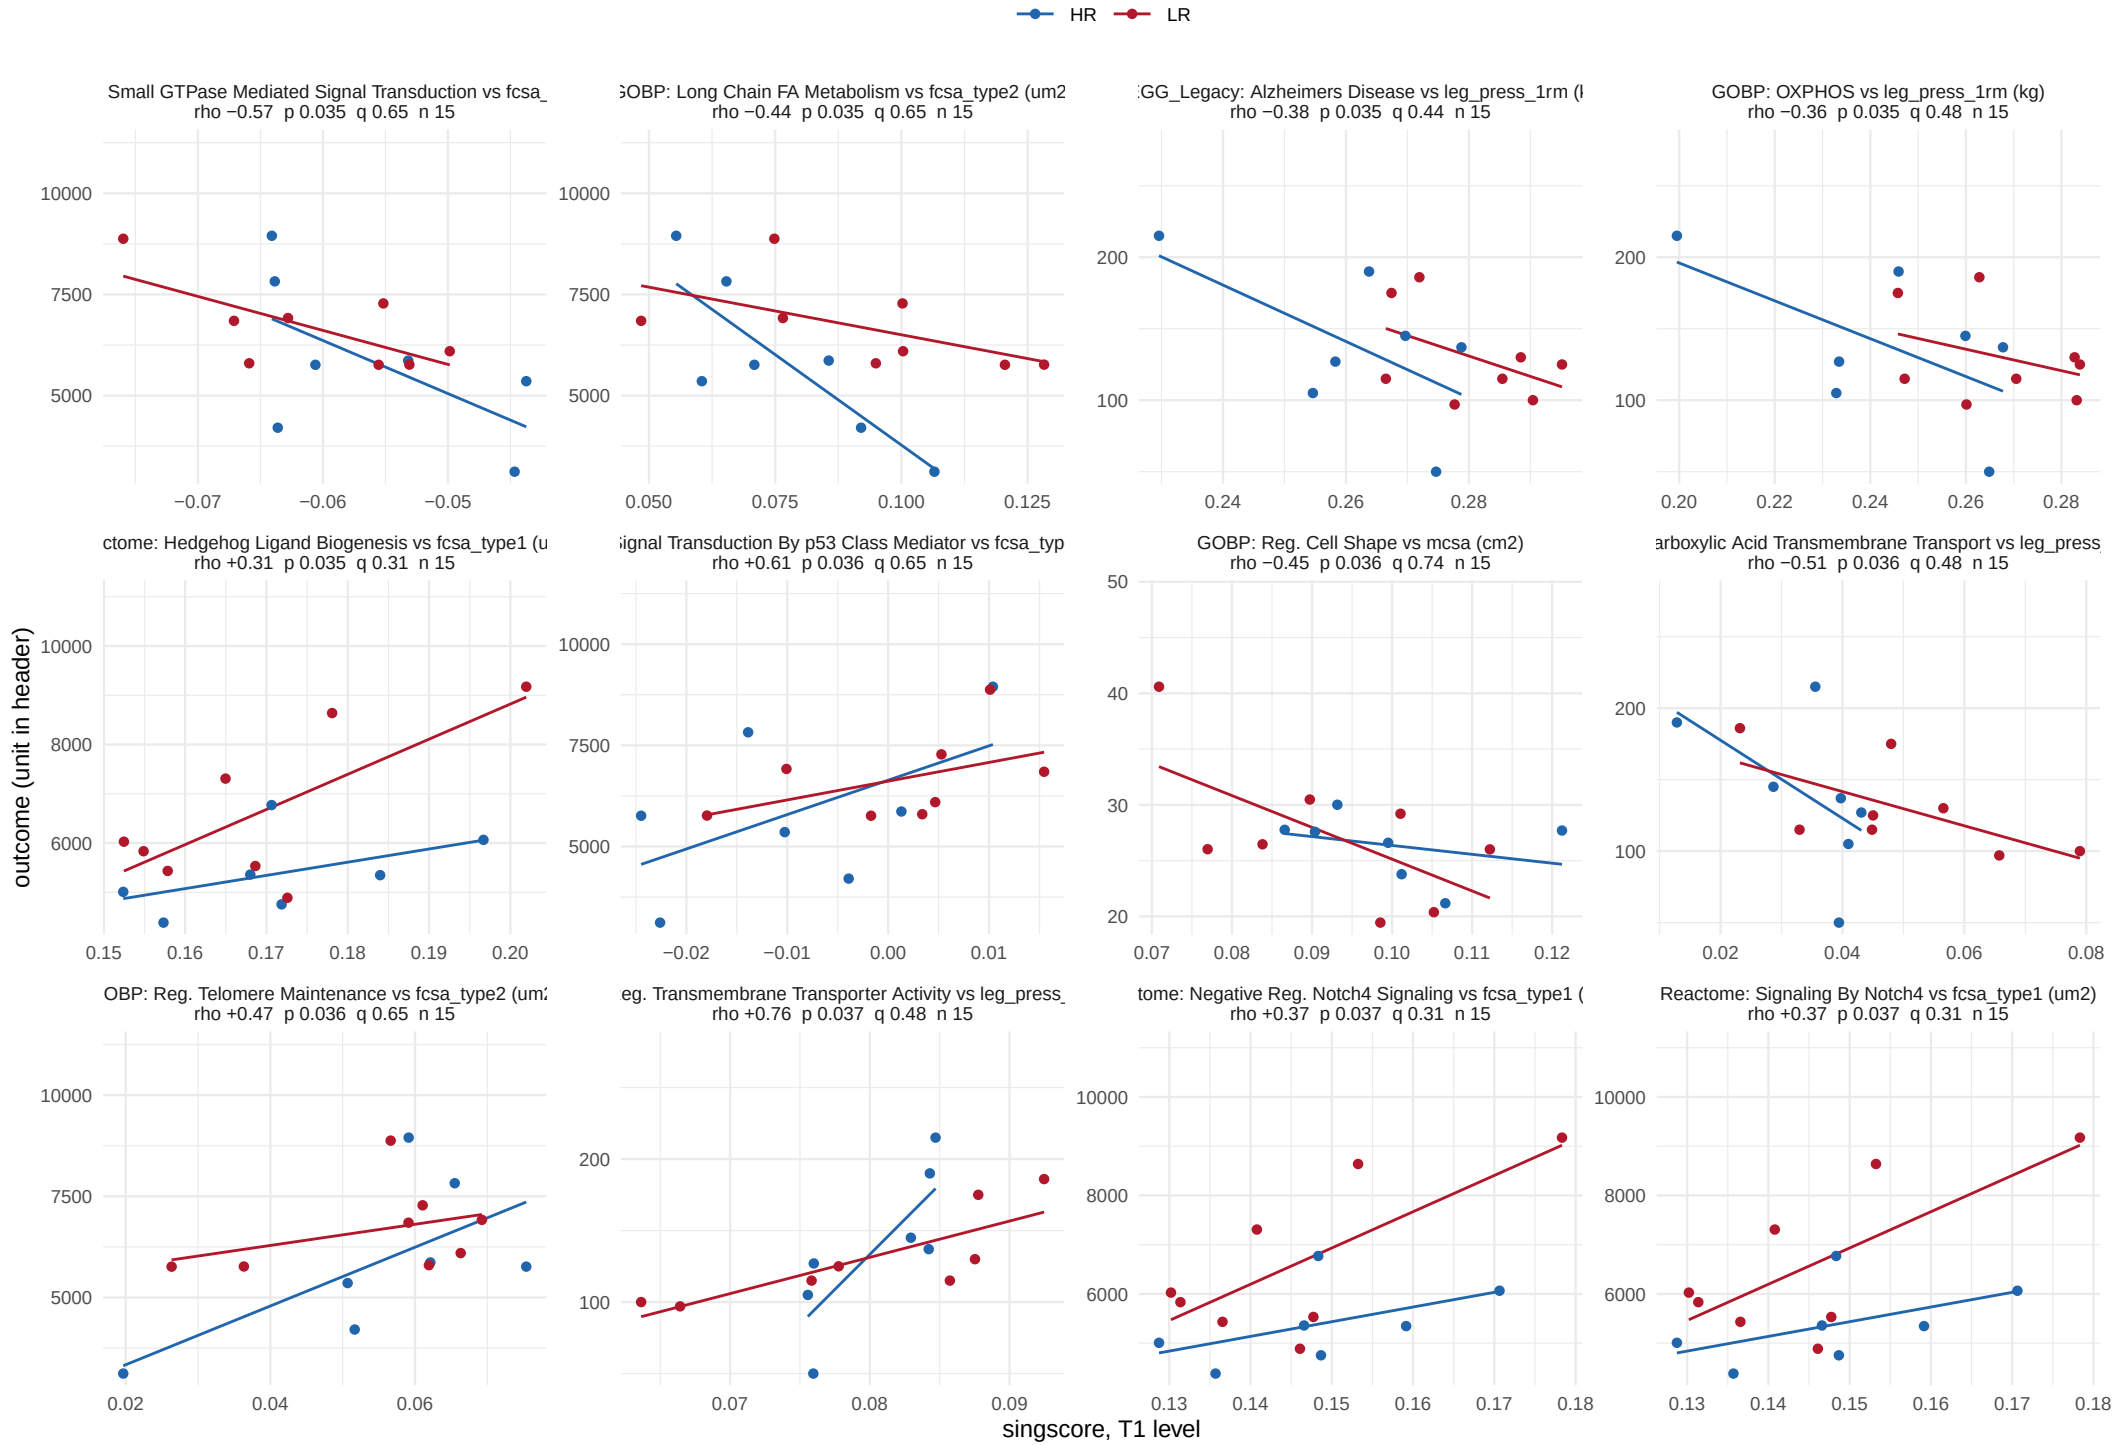

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


653 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 44 of 55.

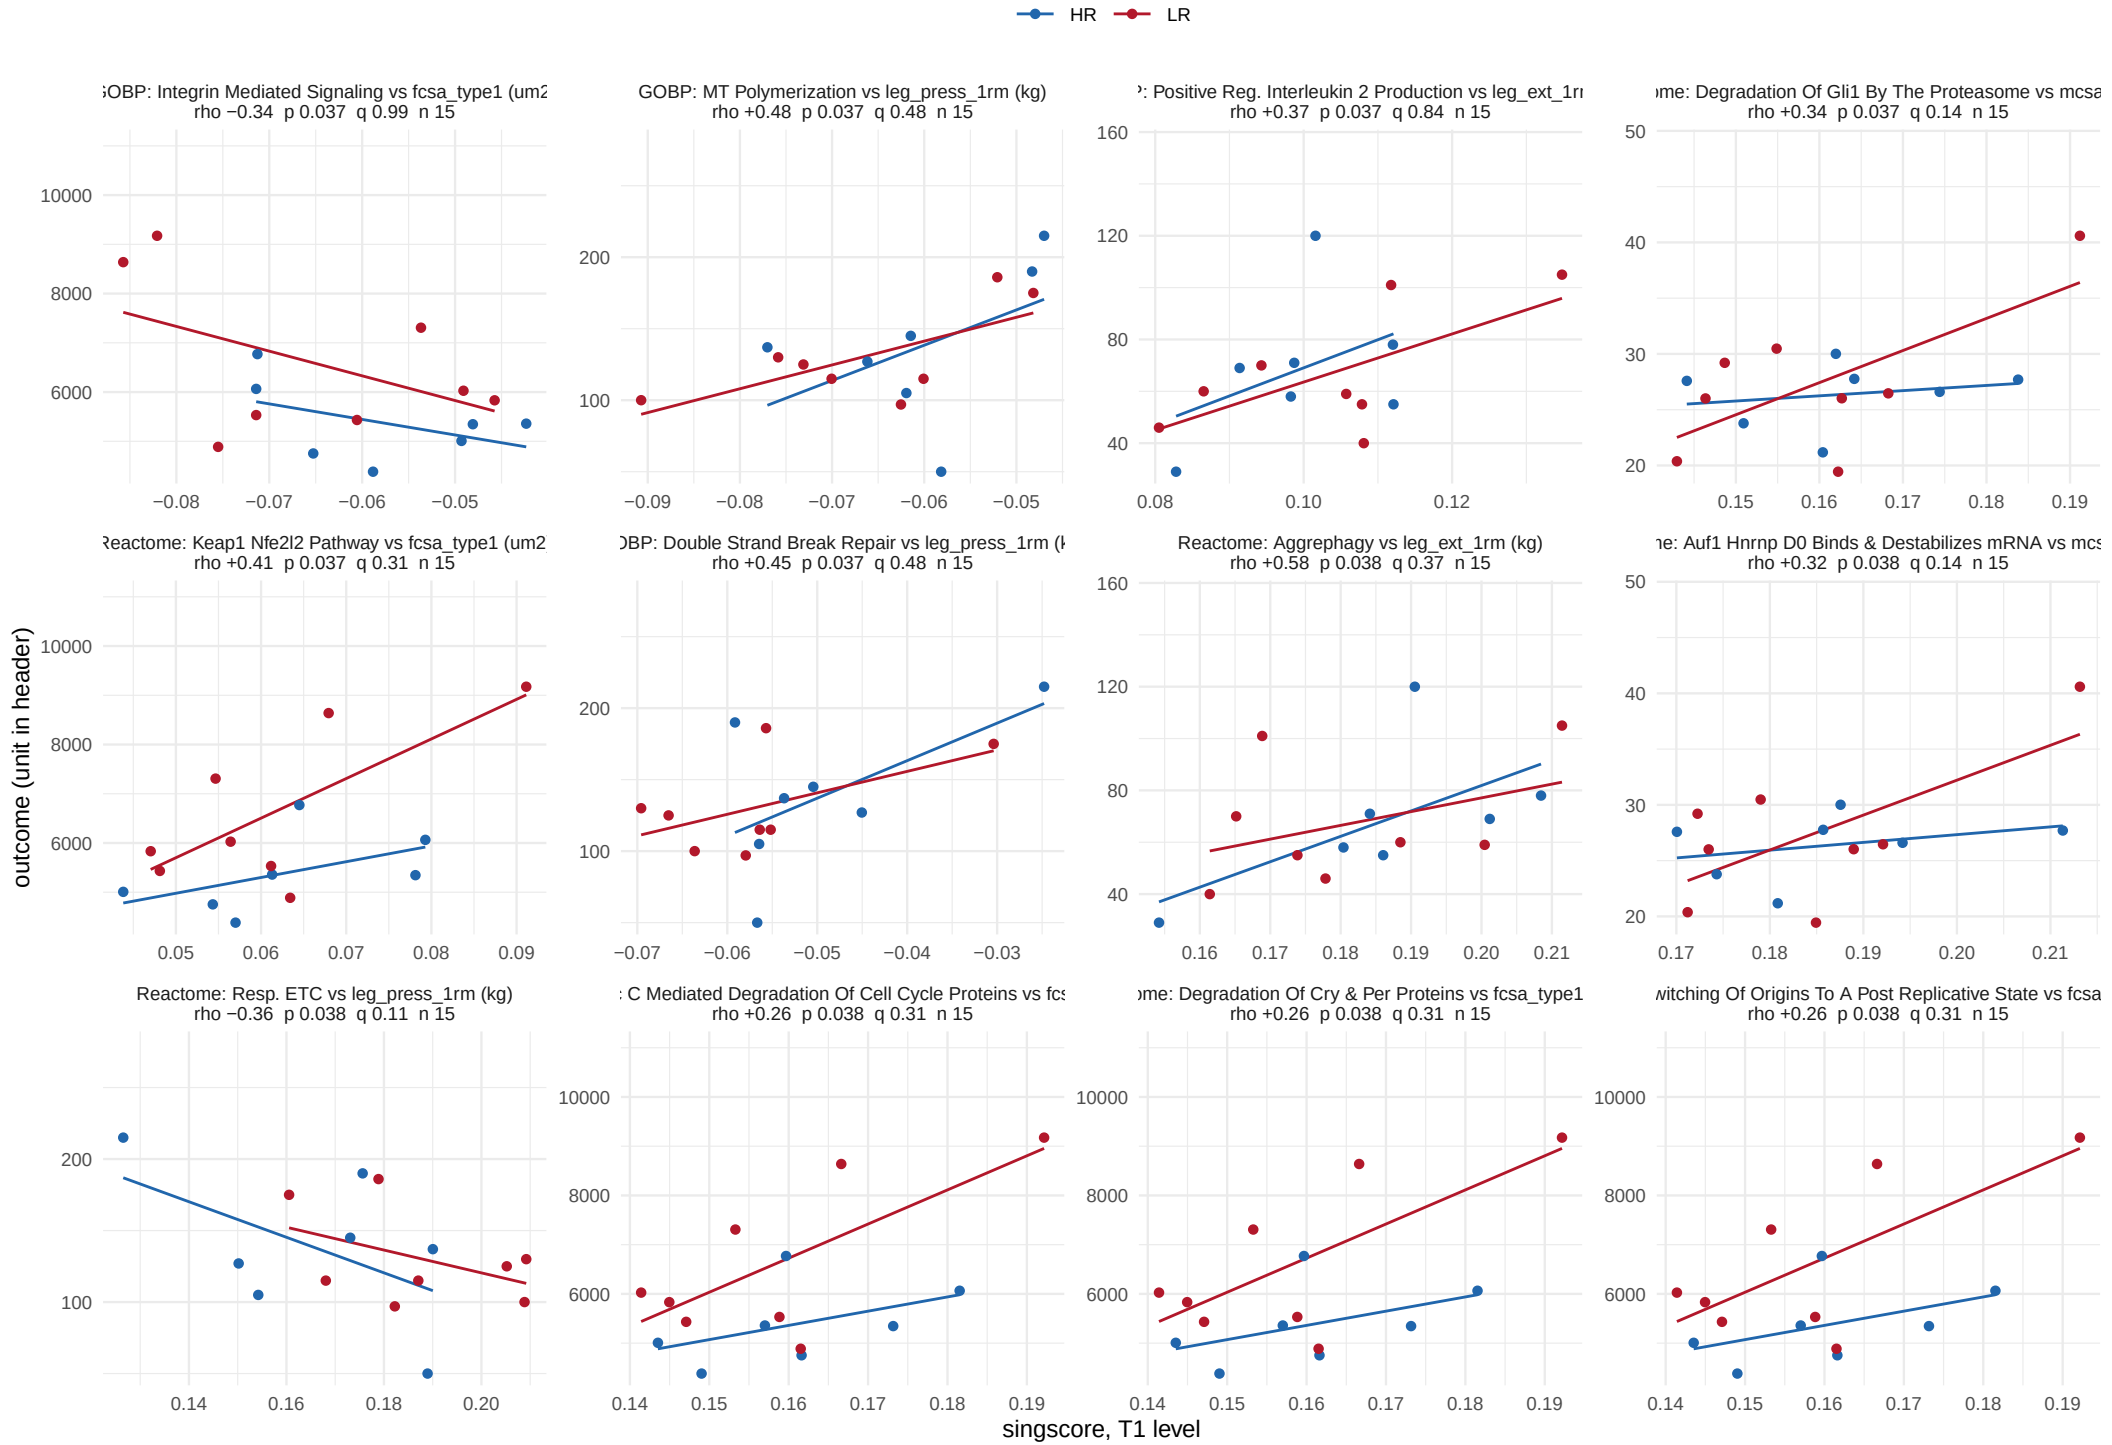

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


653 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 45 of 55.

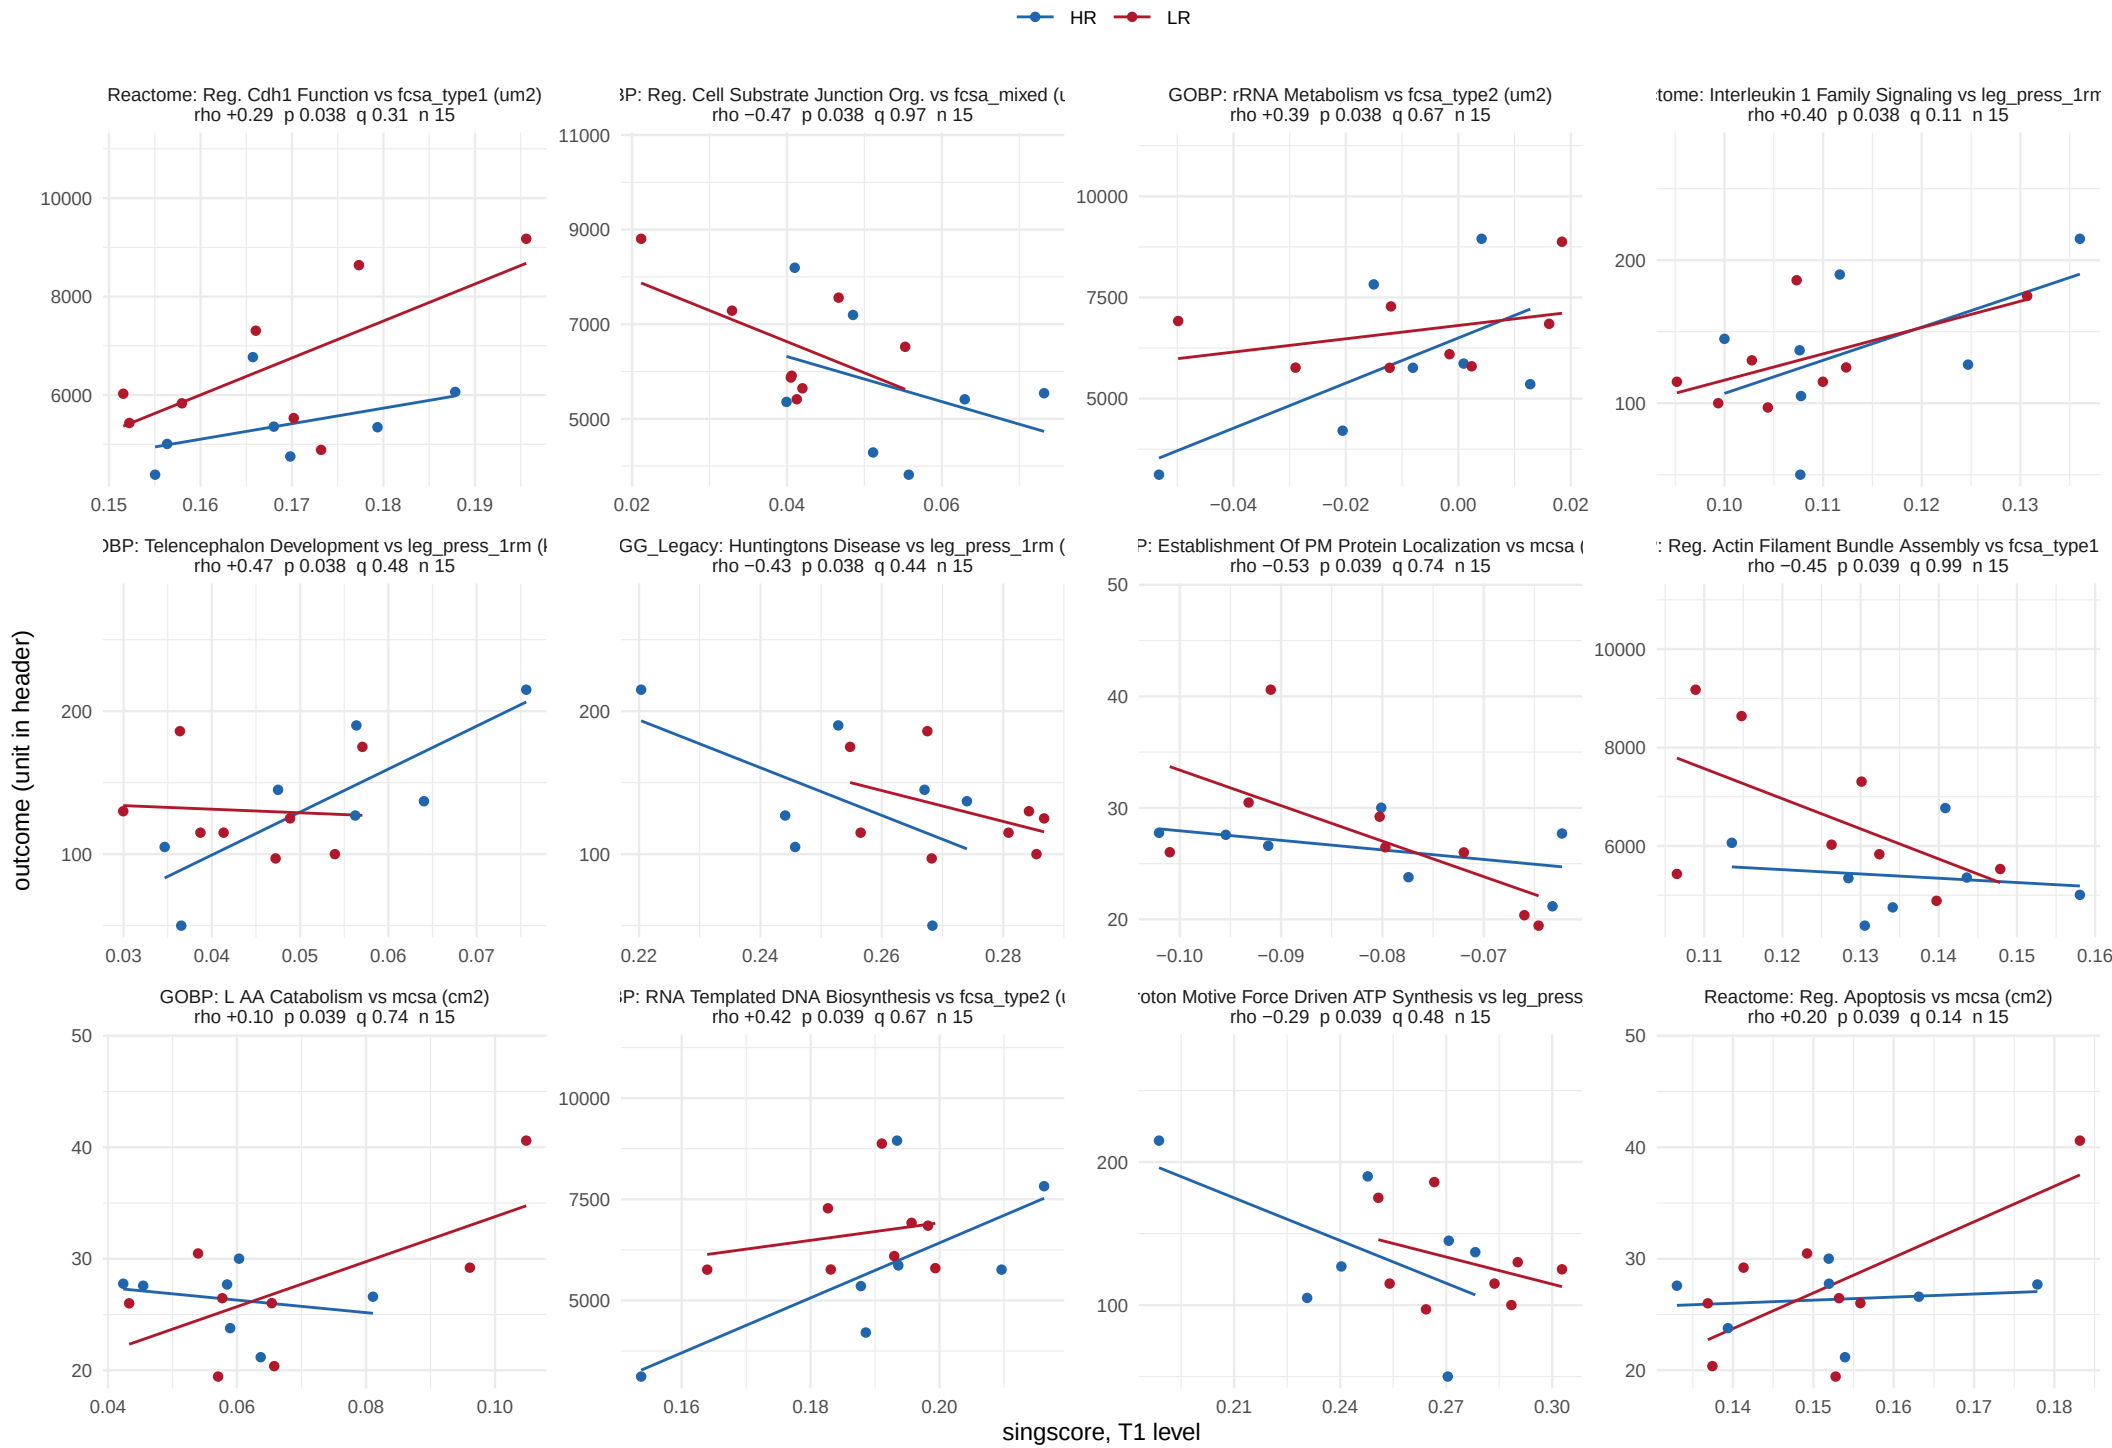

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


653 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 46 of 55.

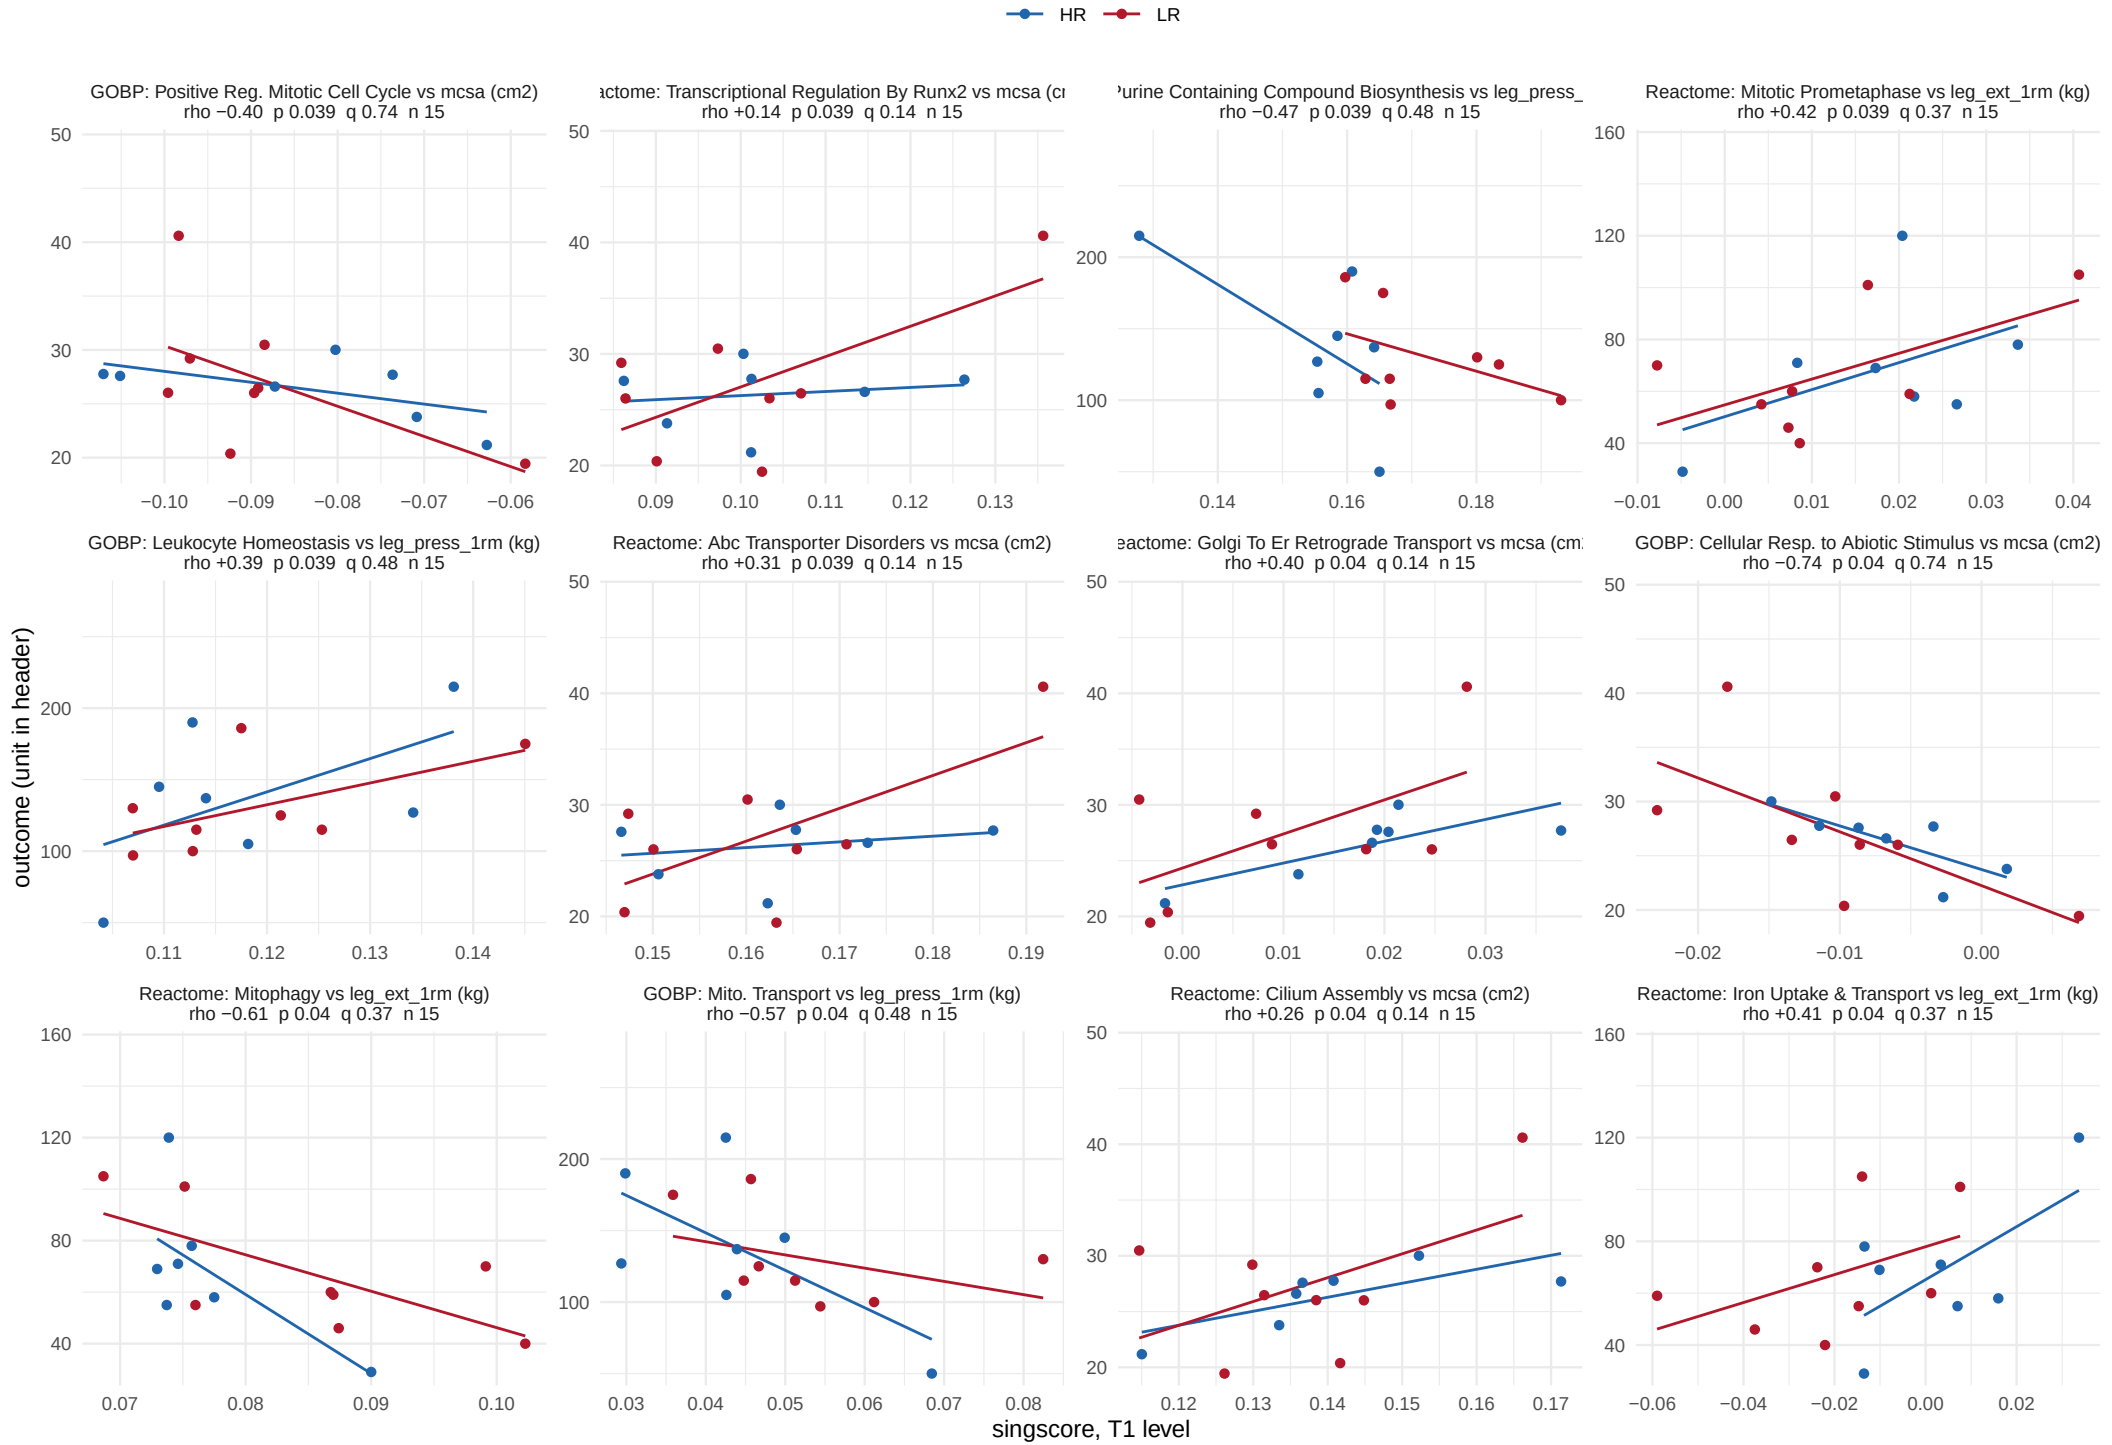

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


653 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 47 of 55.

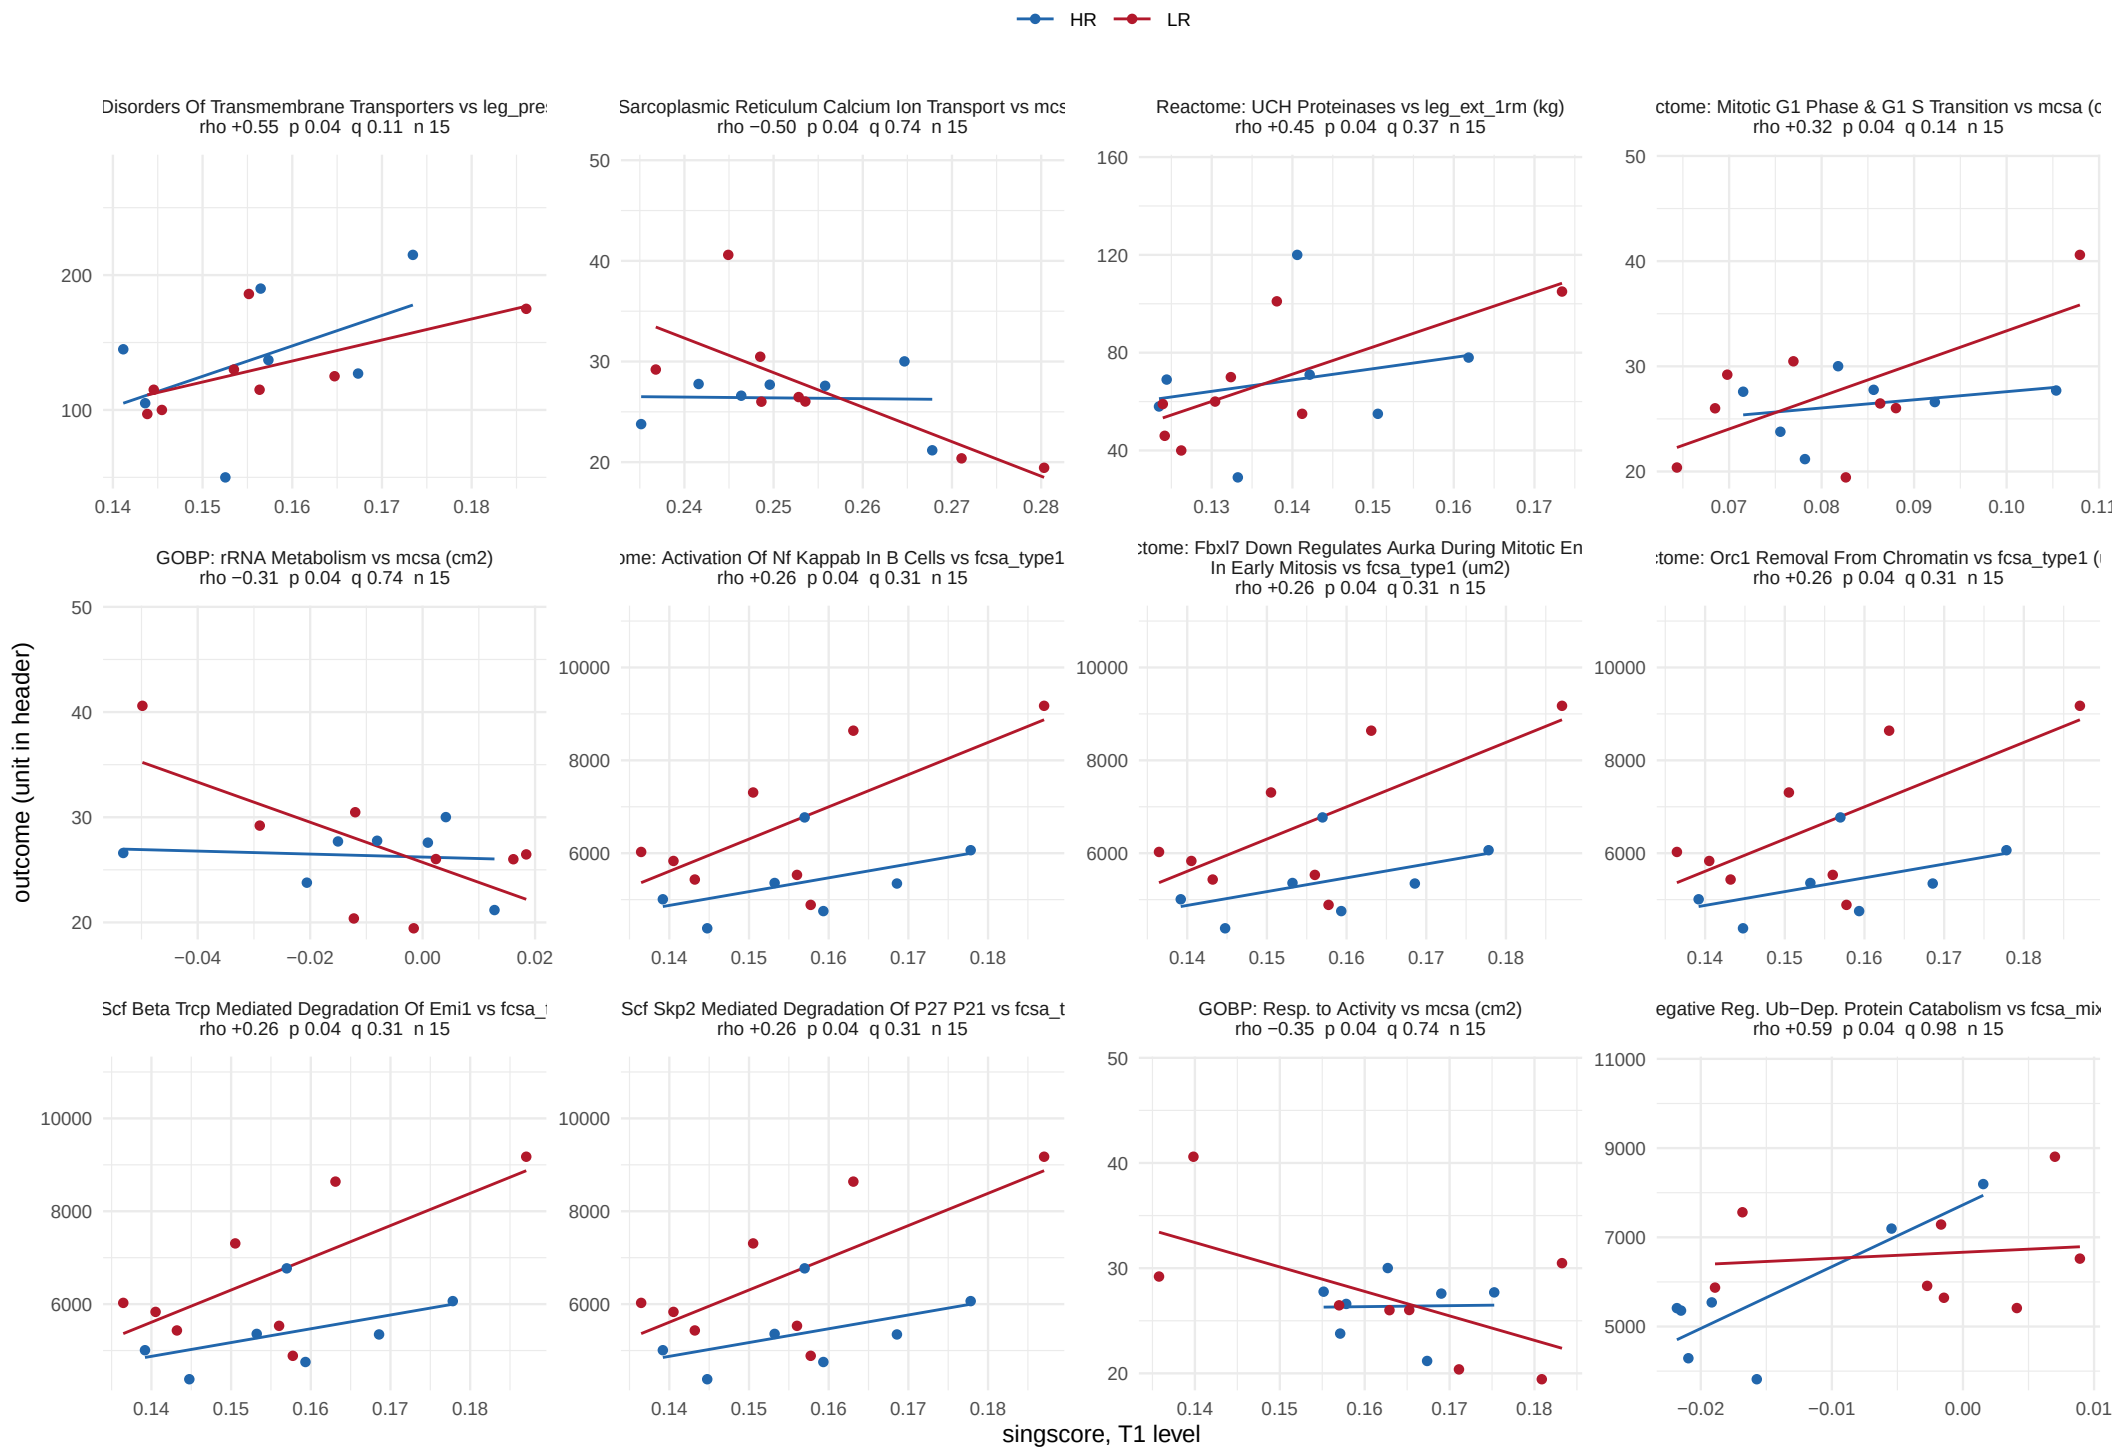

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


653 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 48 of 55.

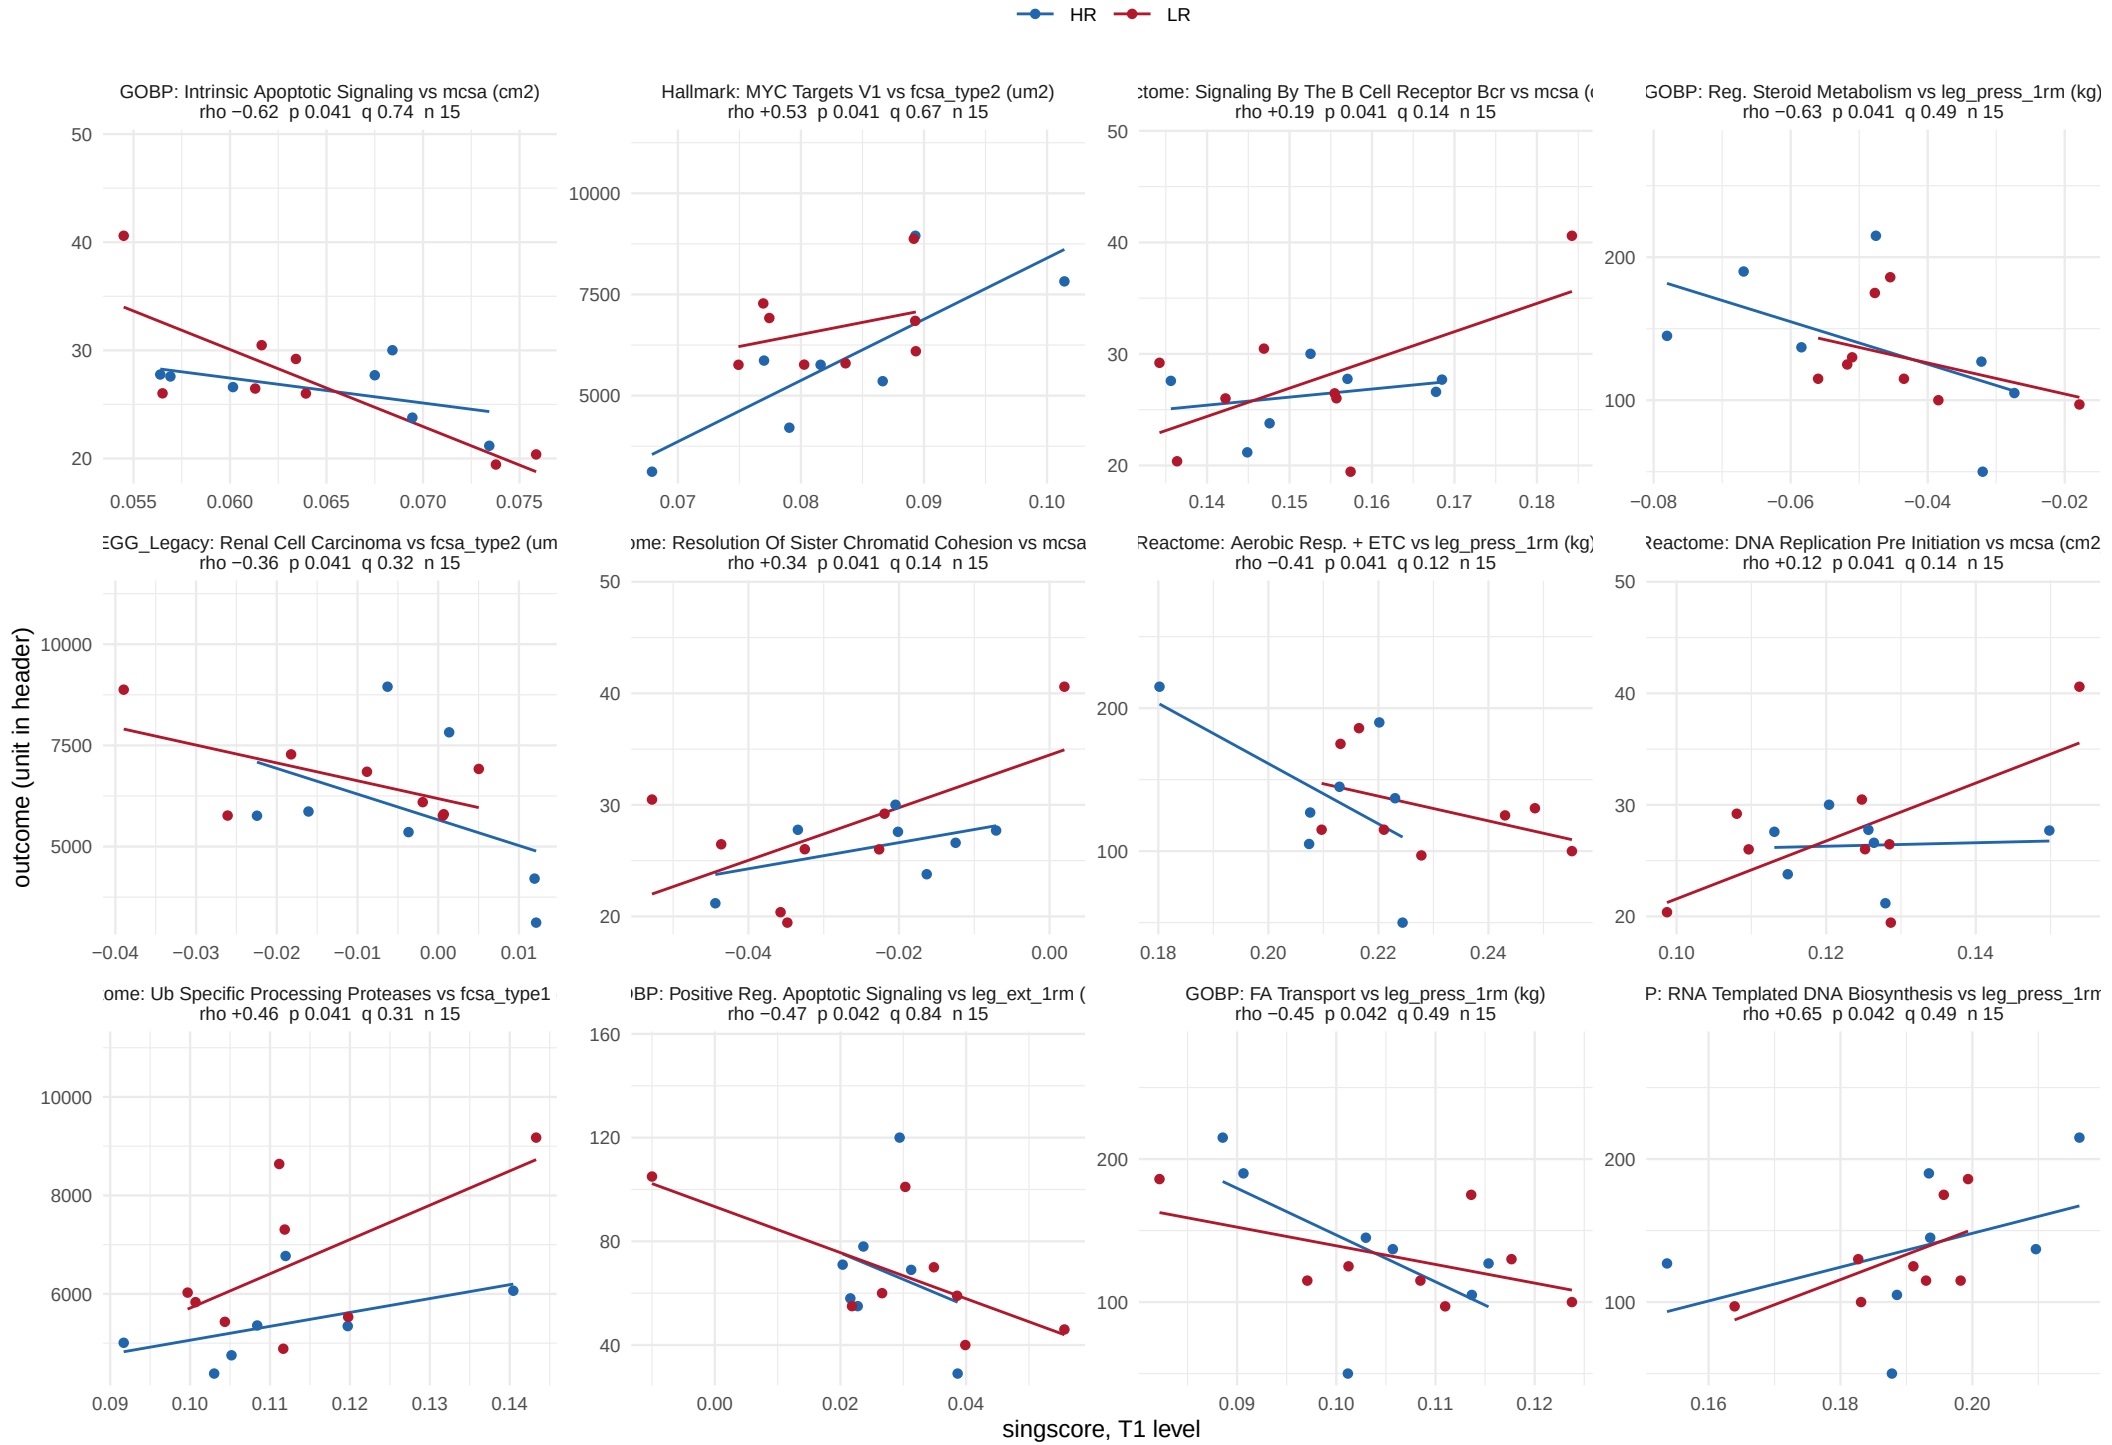

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


653 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 49 of 55.

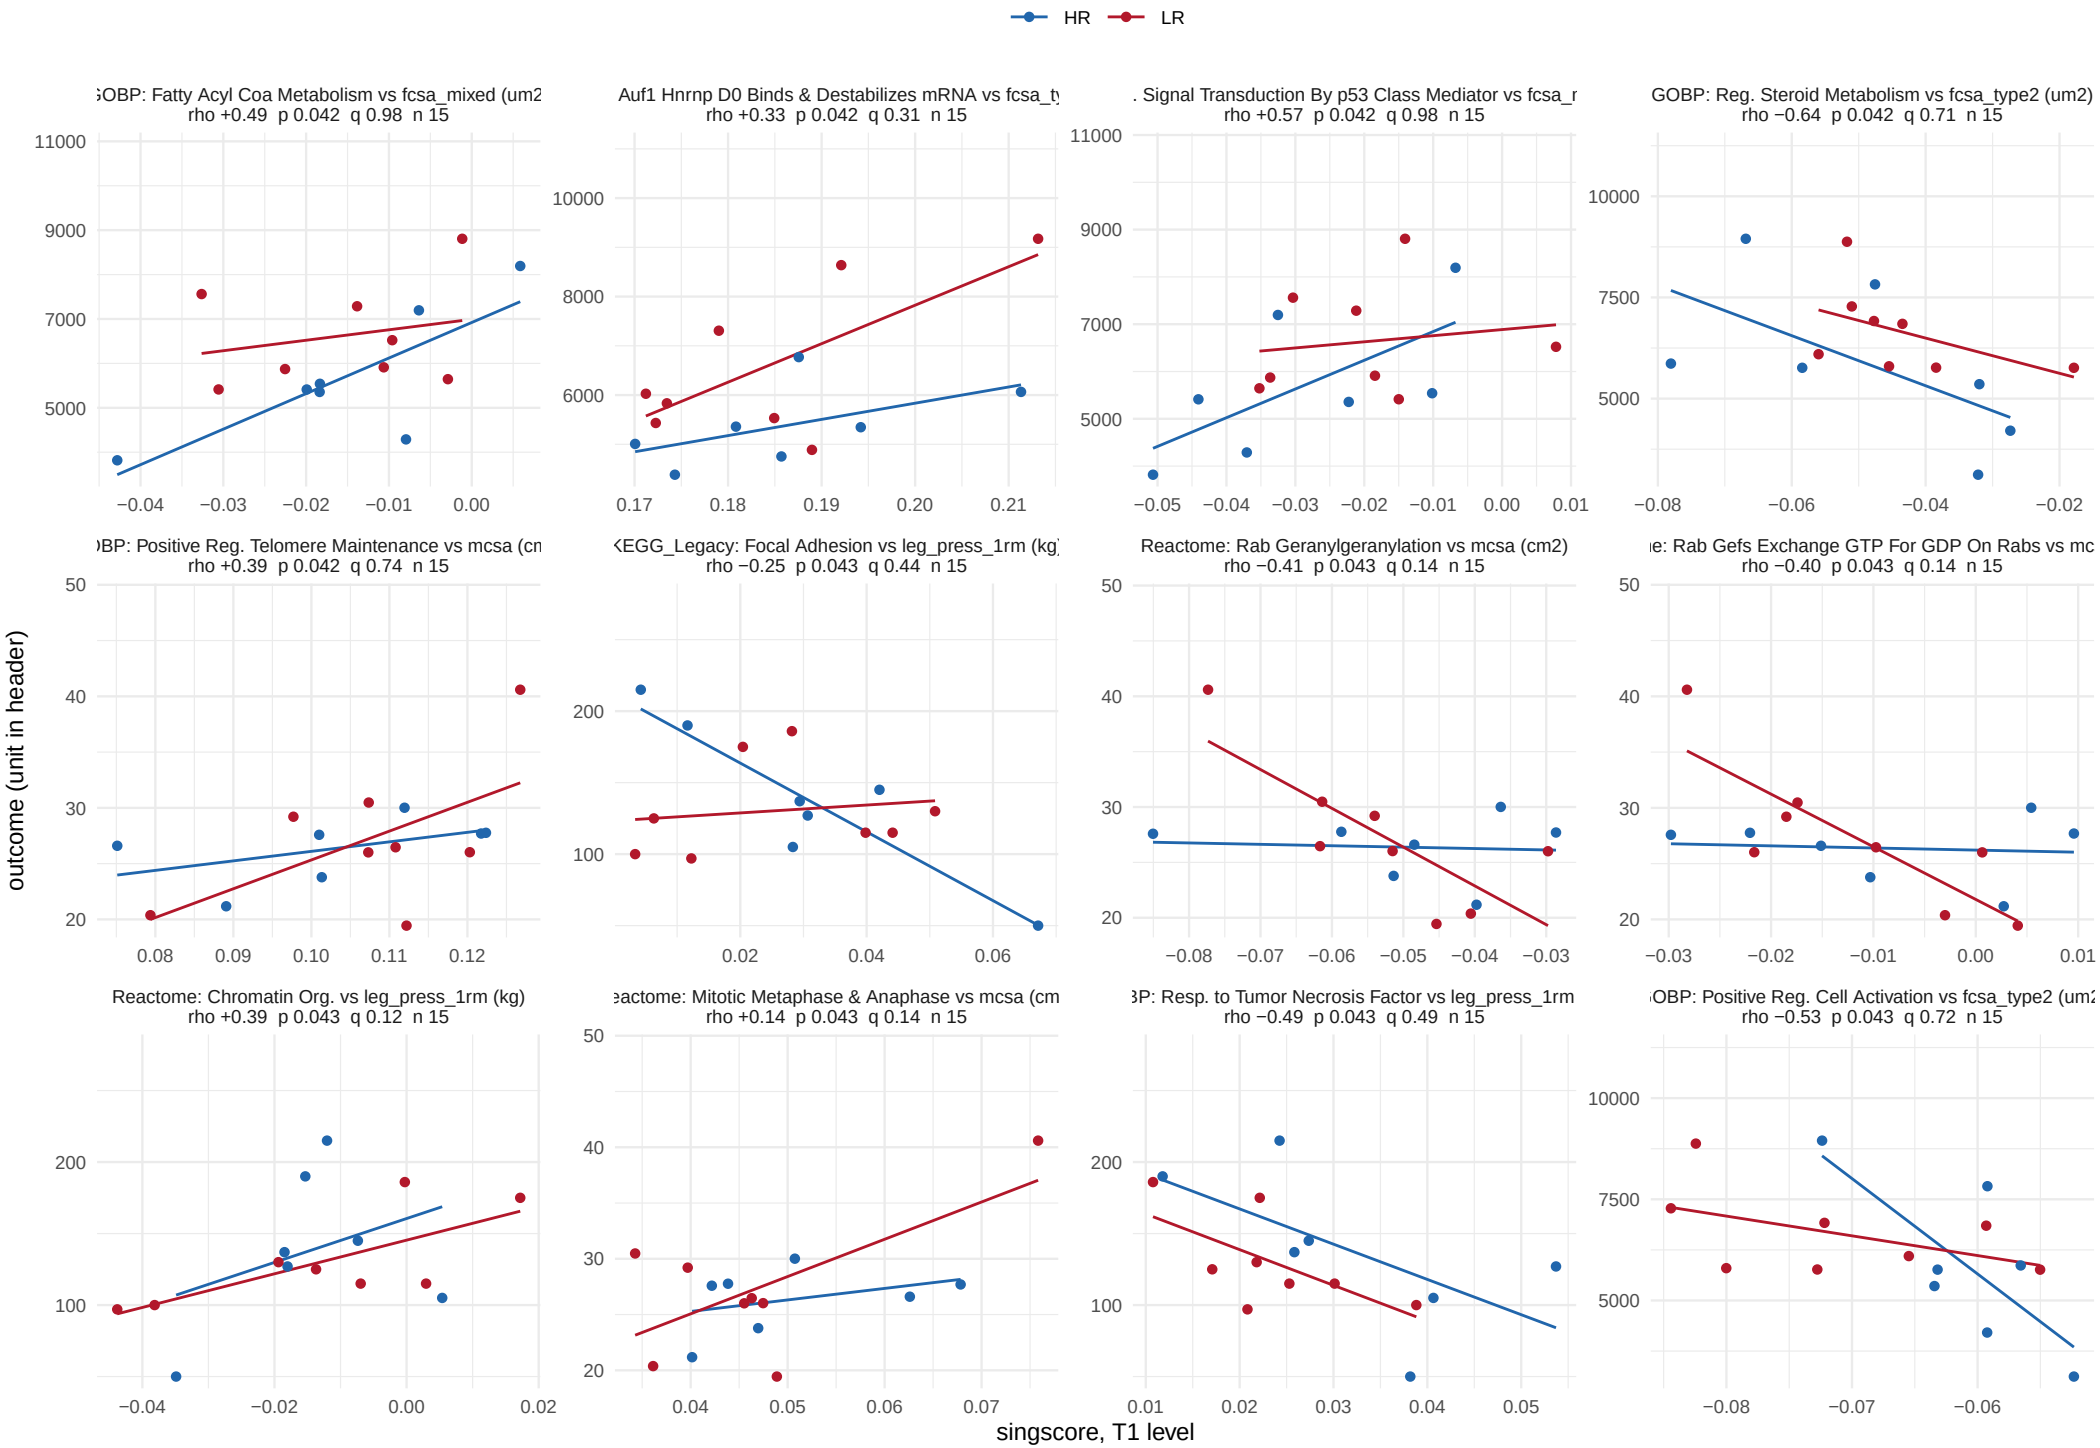

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


653 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 50 of 55.

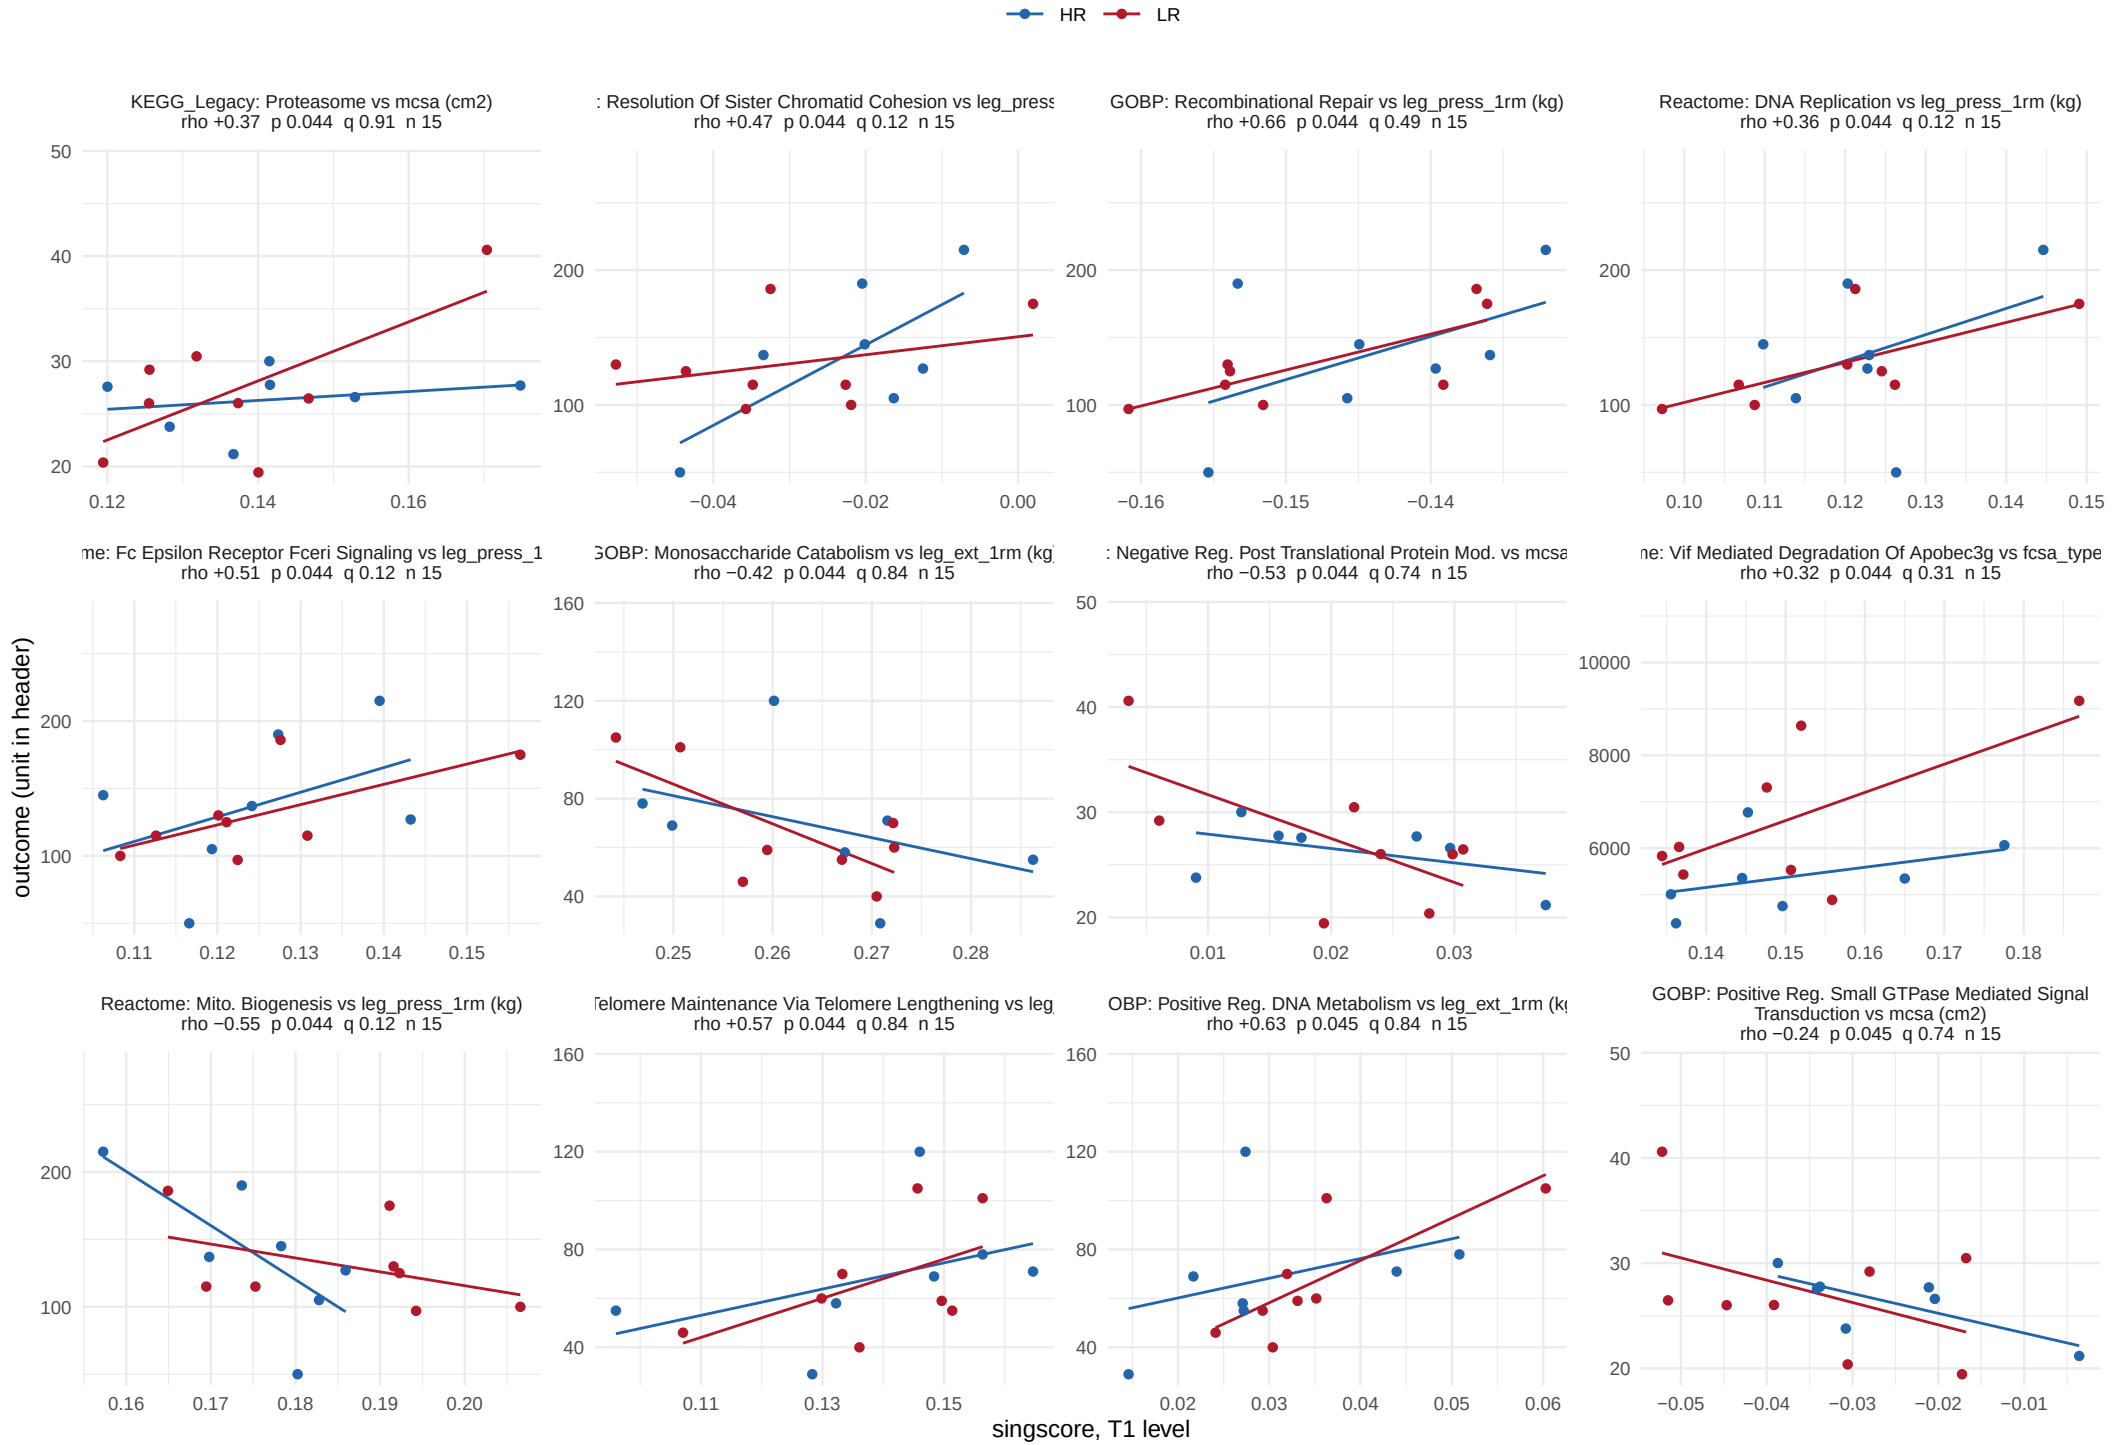

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


653 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 51 of 55.

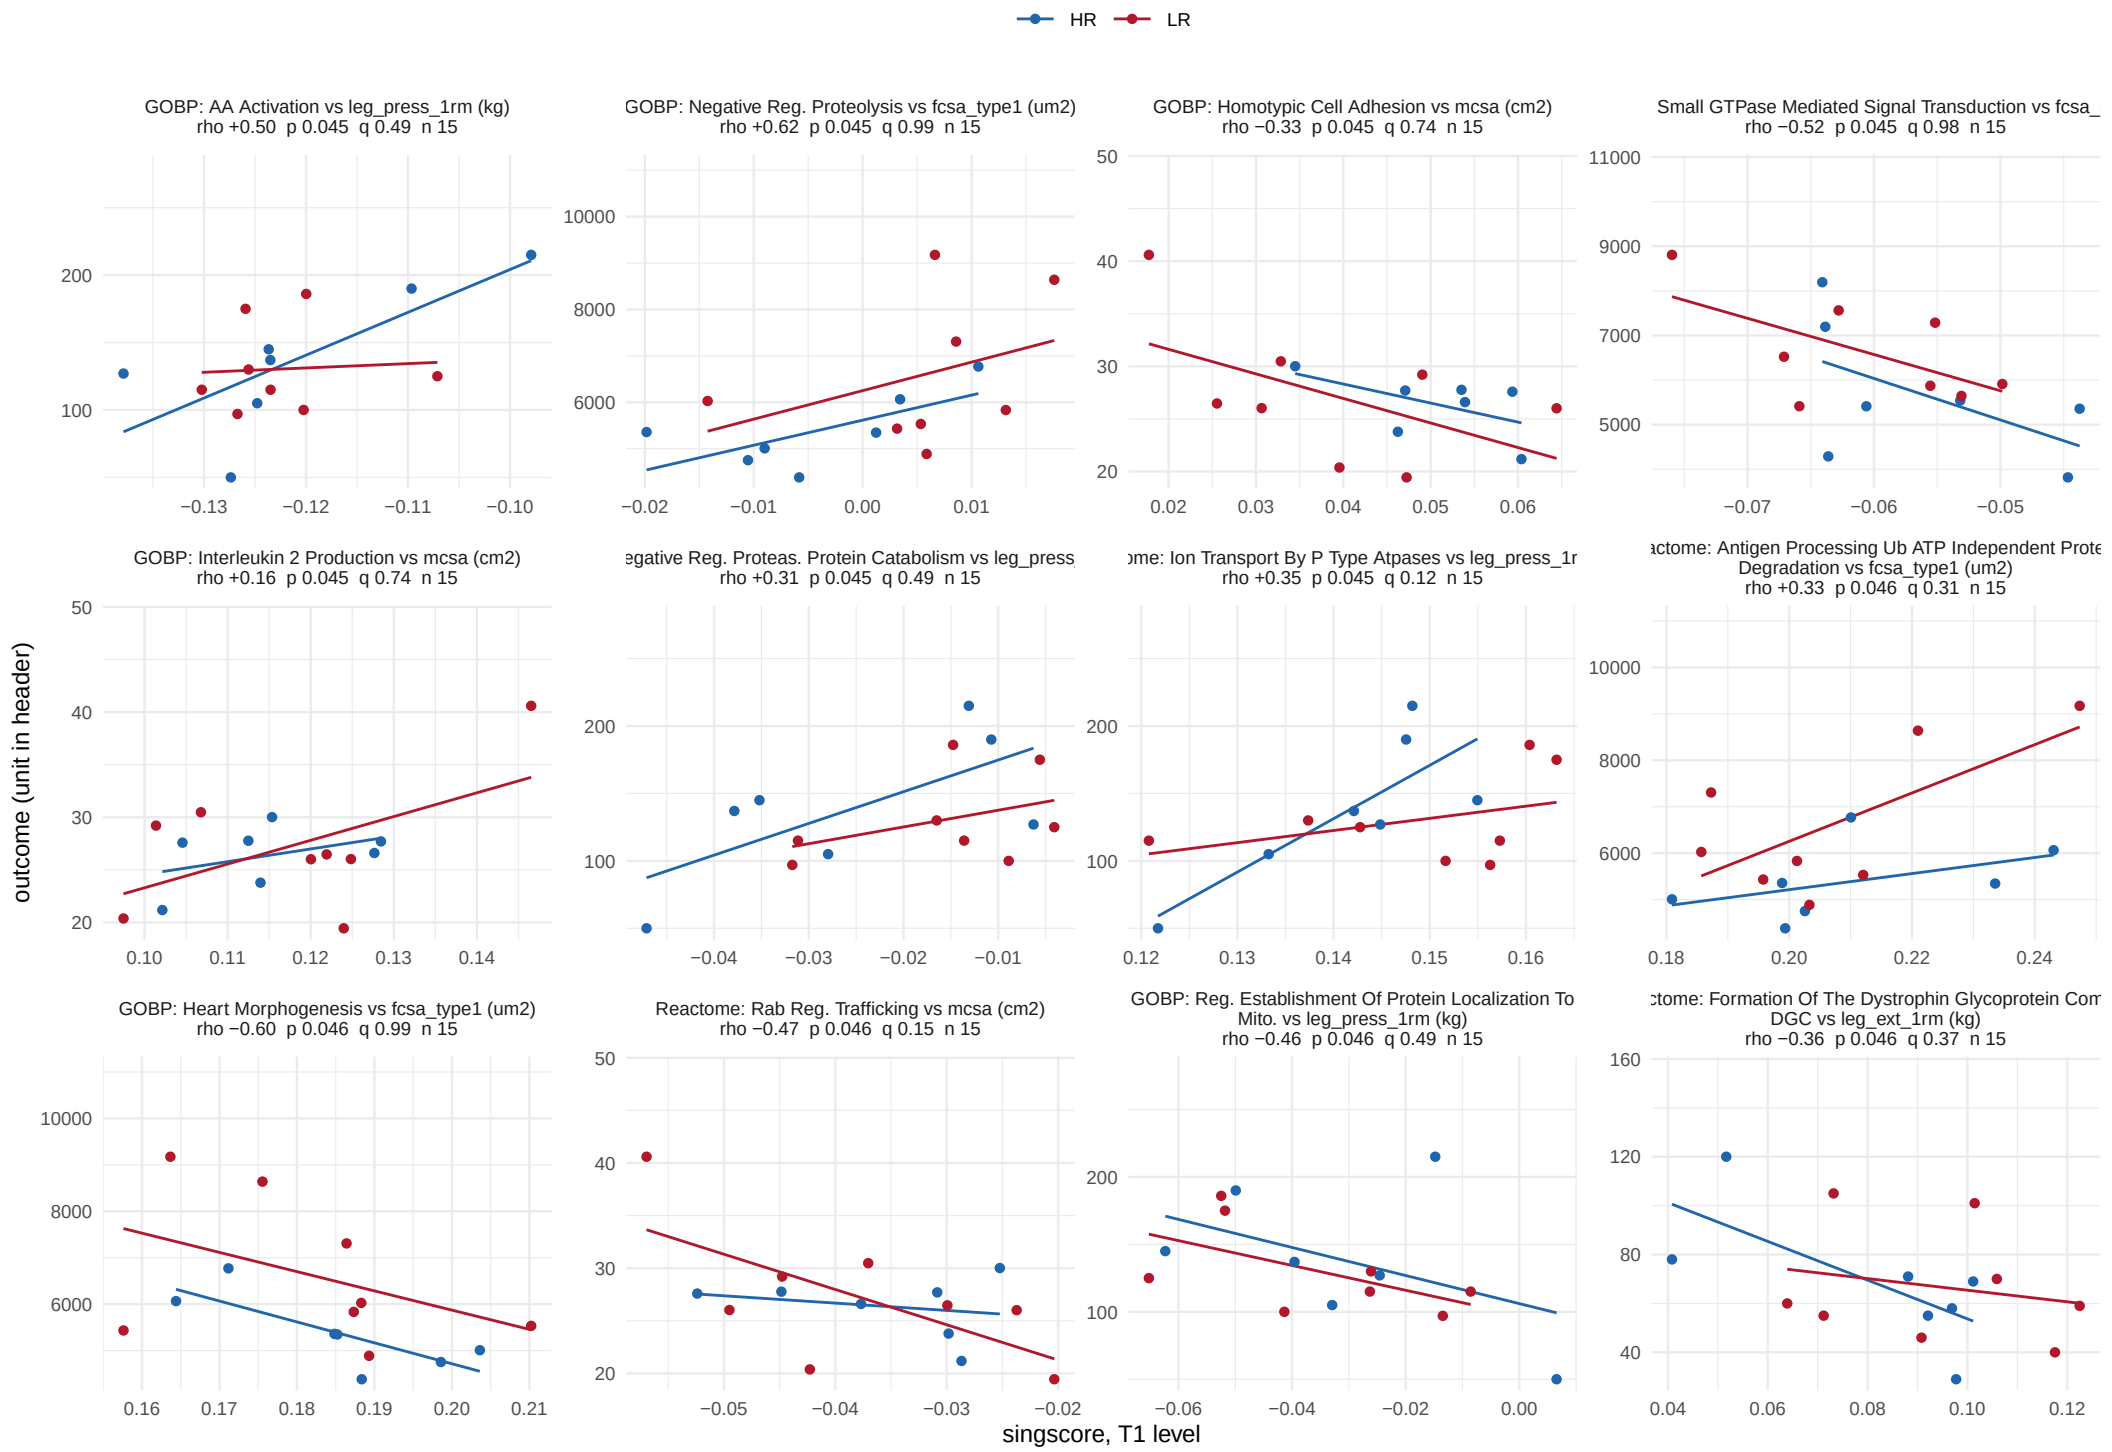

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


653 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 52 of 55.

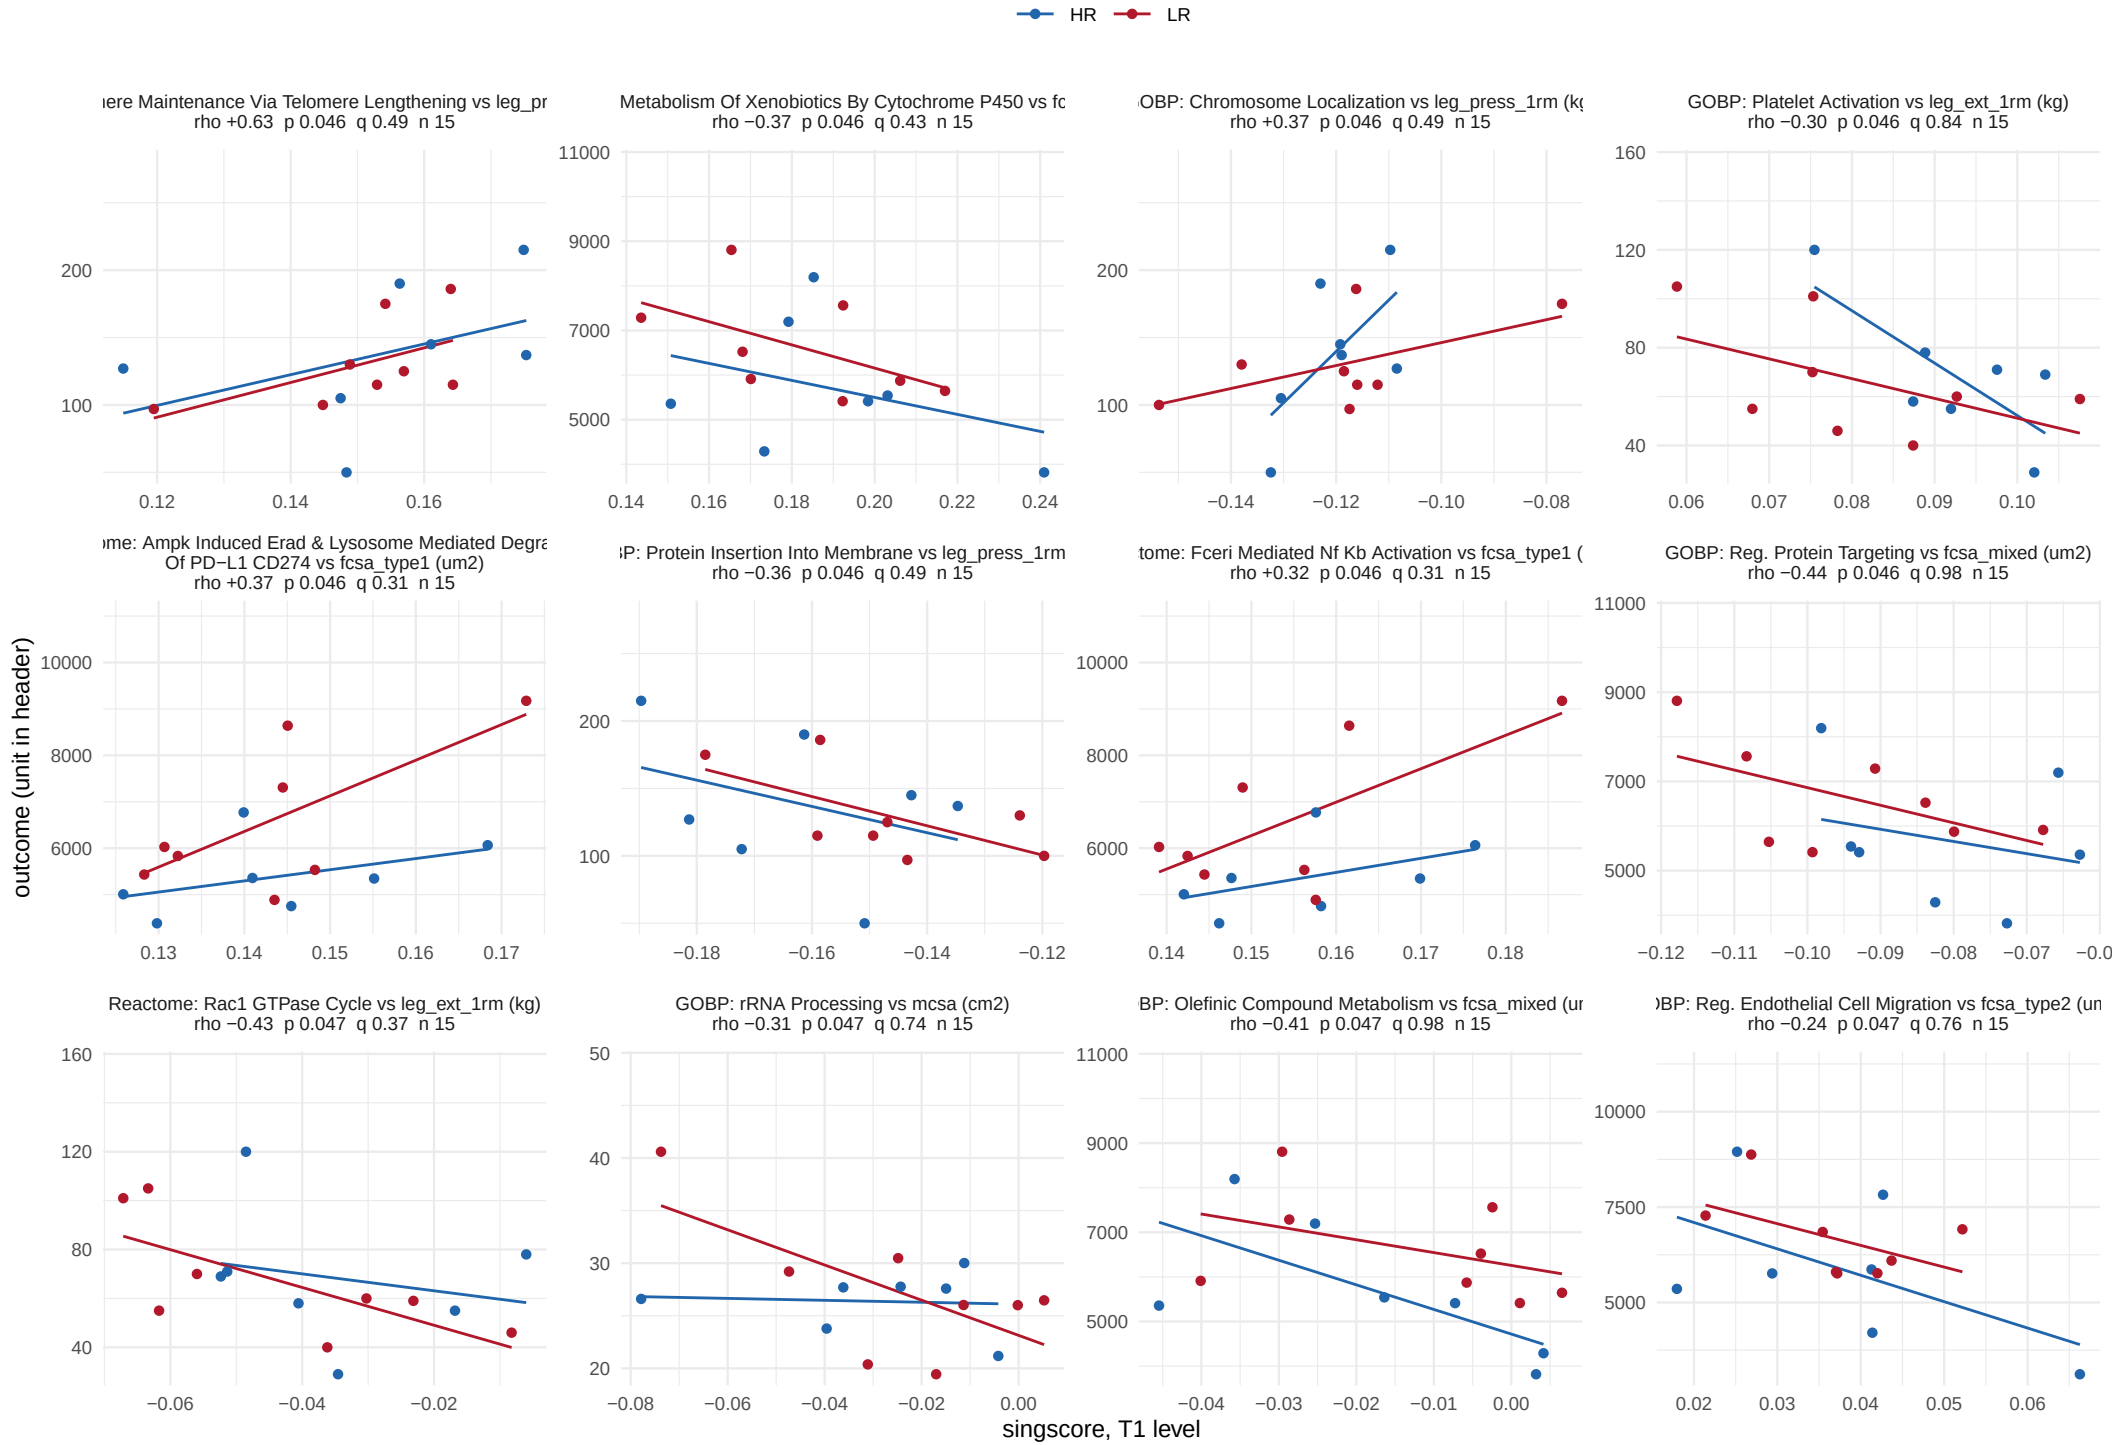

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


653 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 53 of 55.

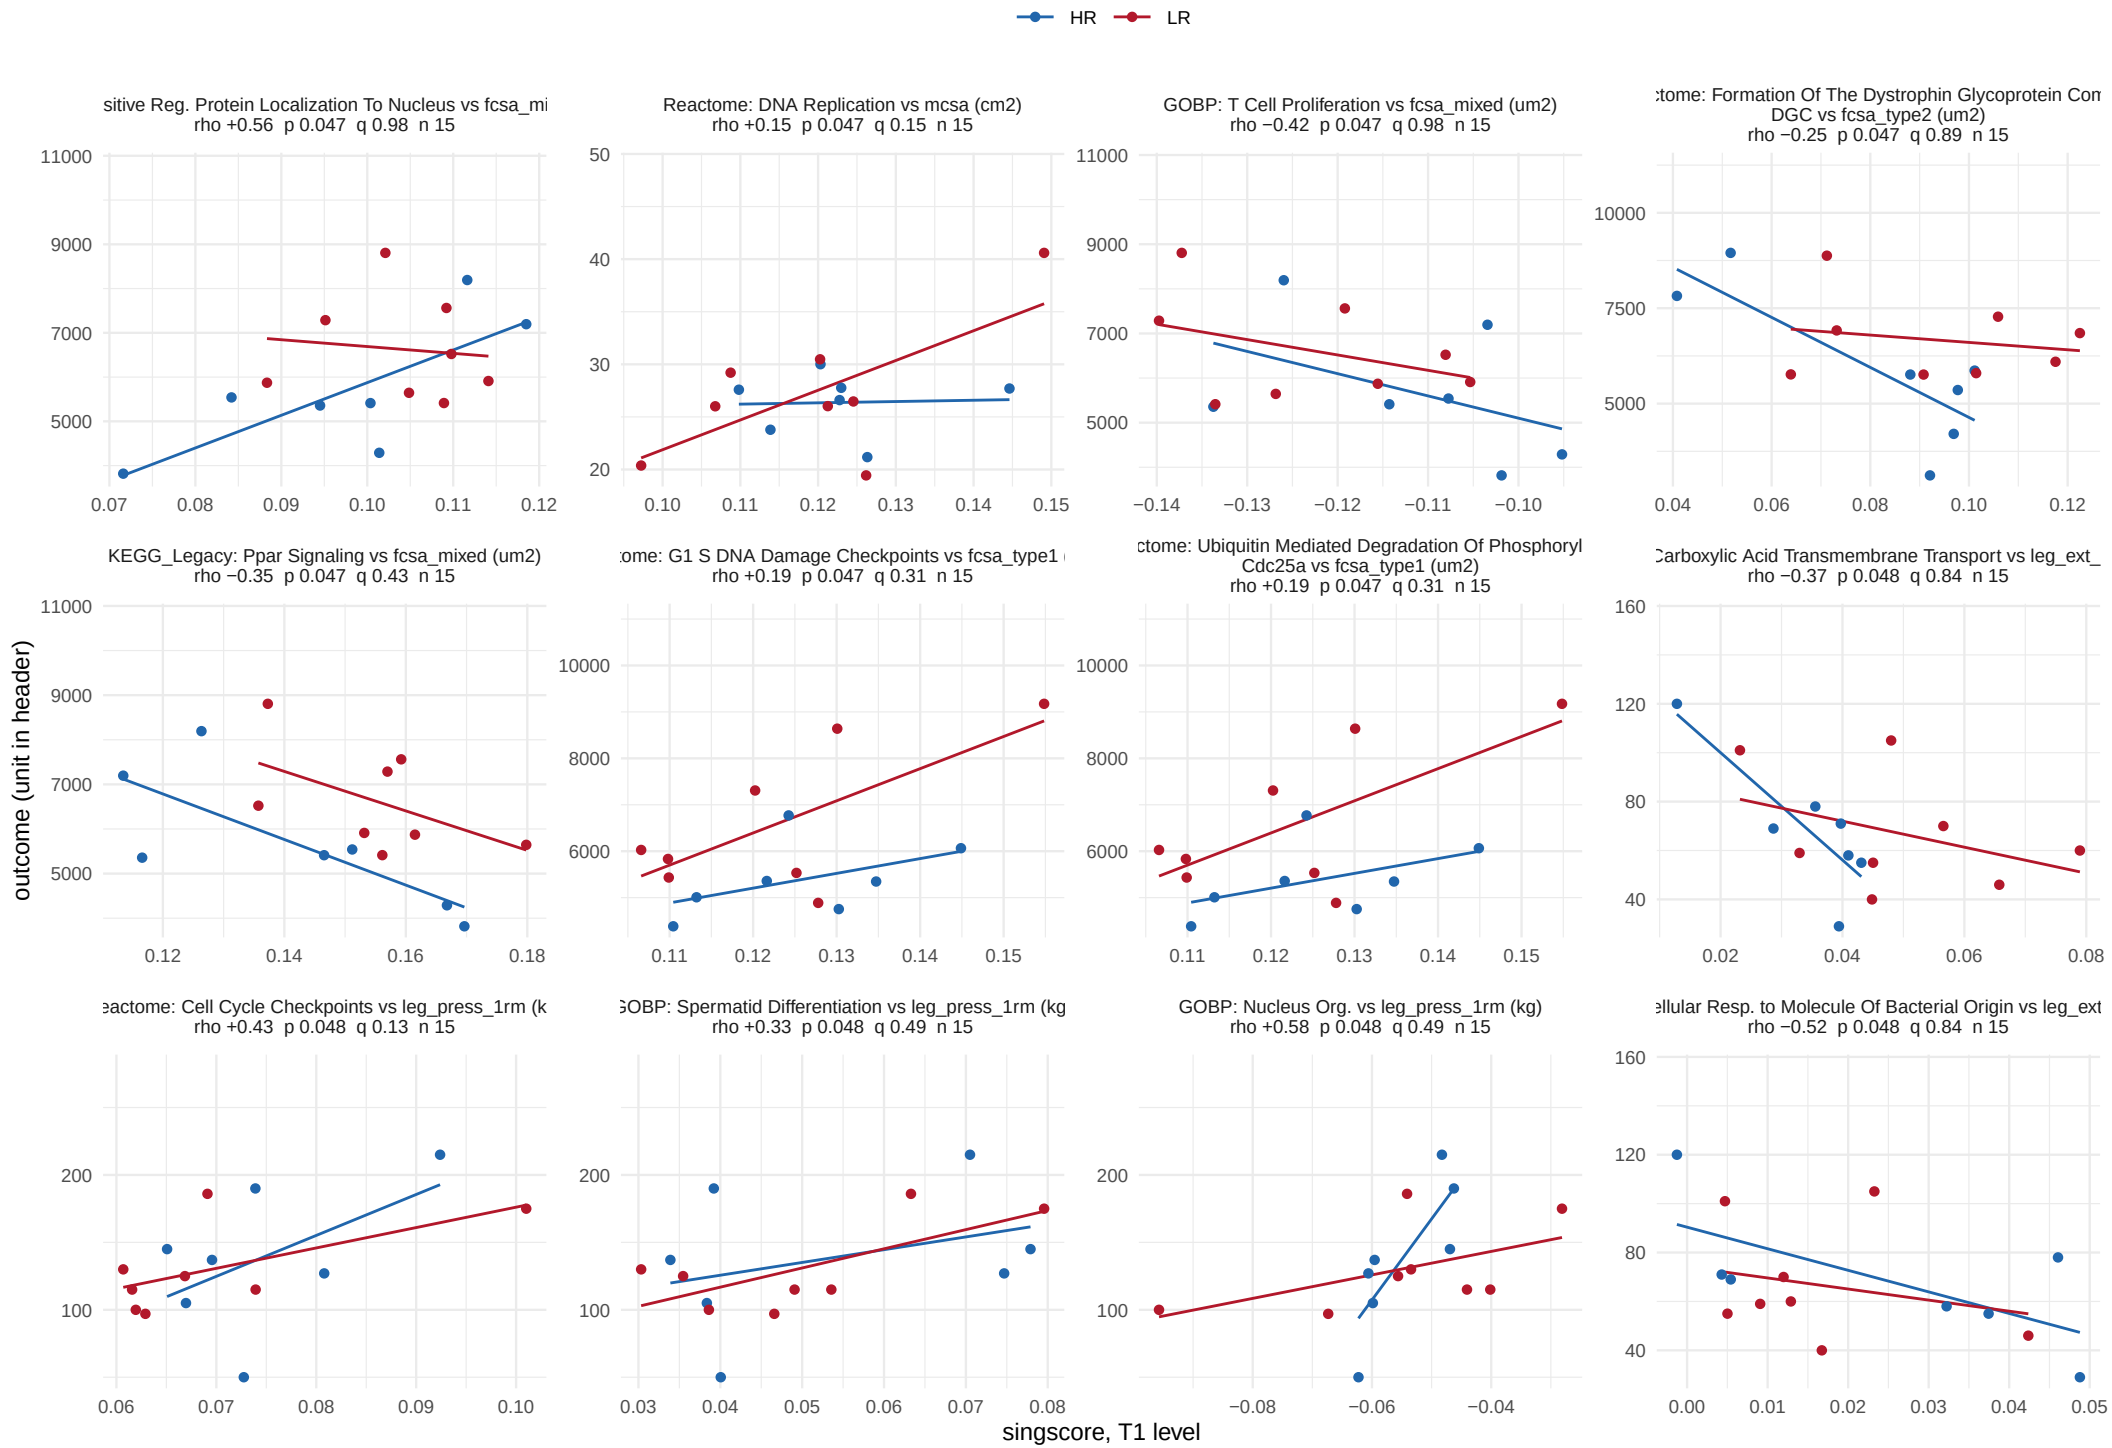

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


653 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 54 of 55.

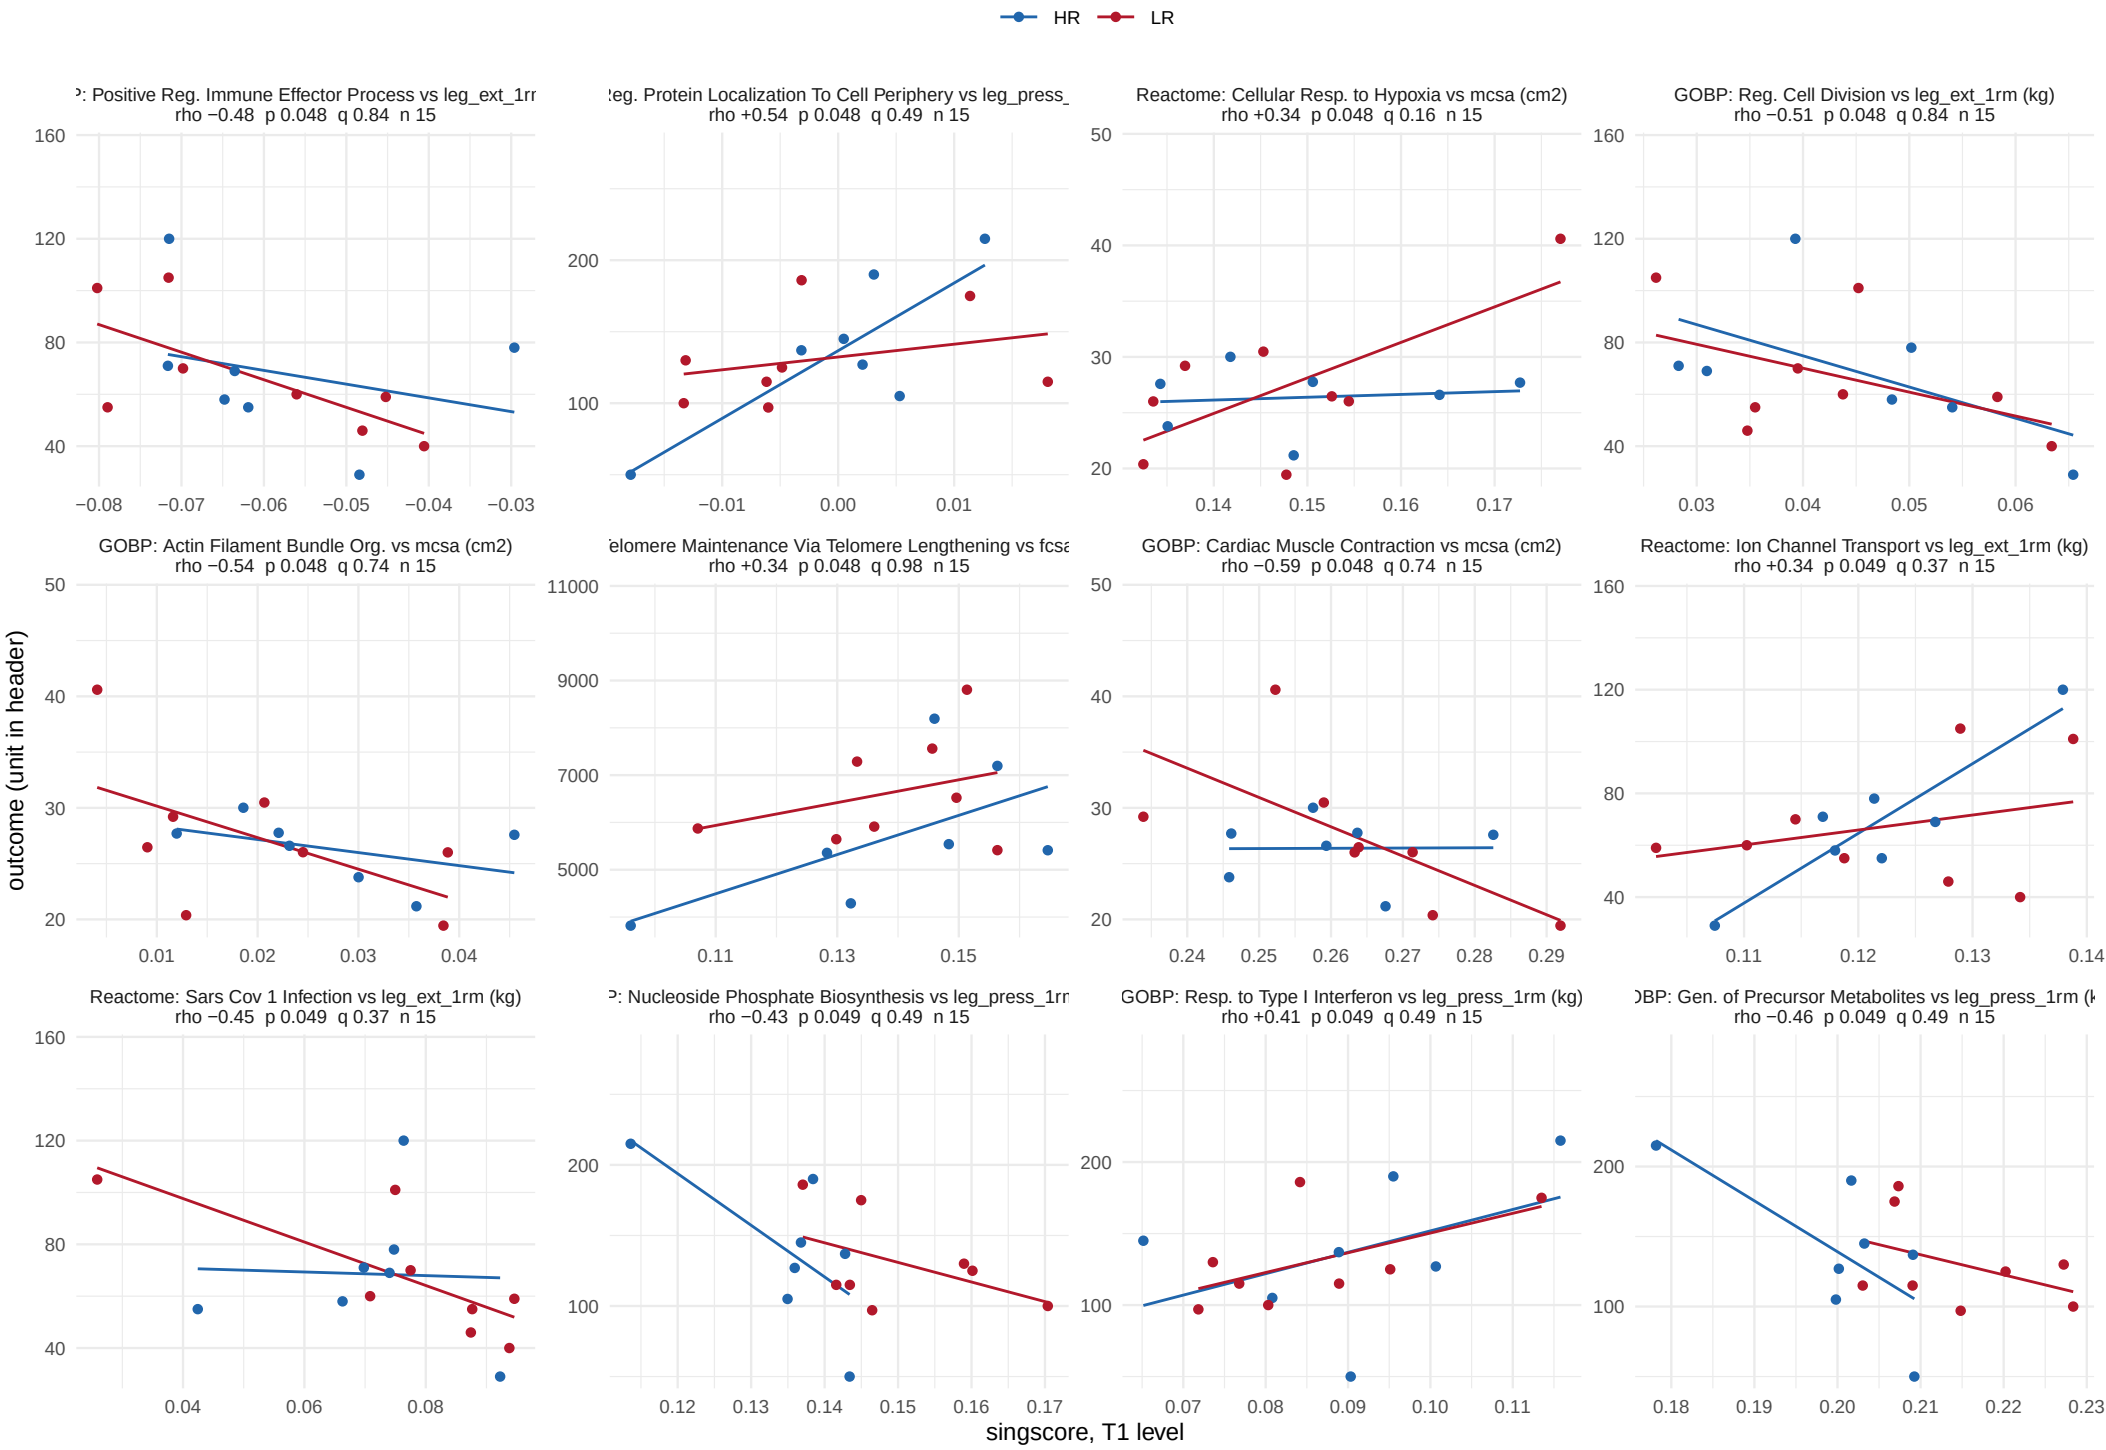

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline_level window


653 of 8268 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 55 of 55.

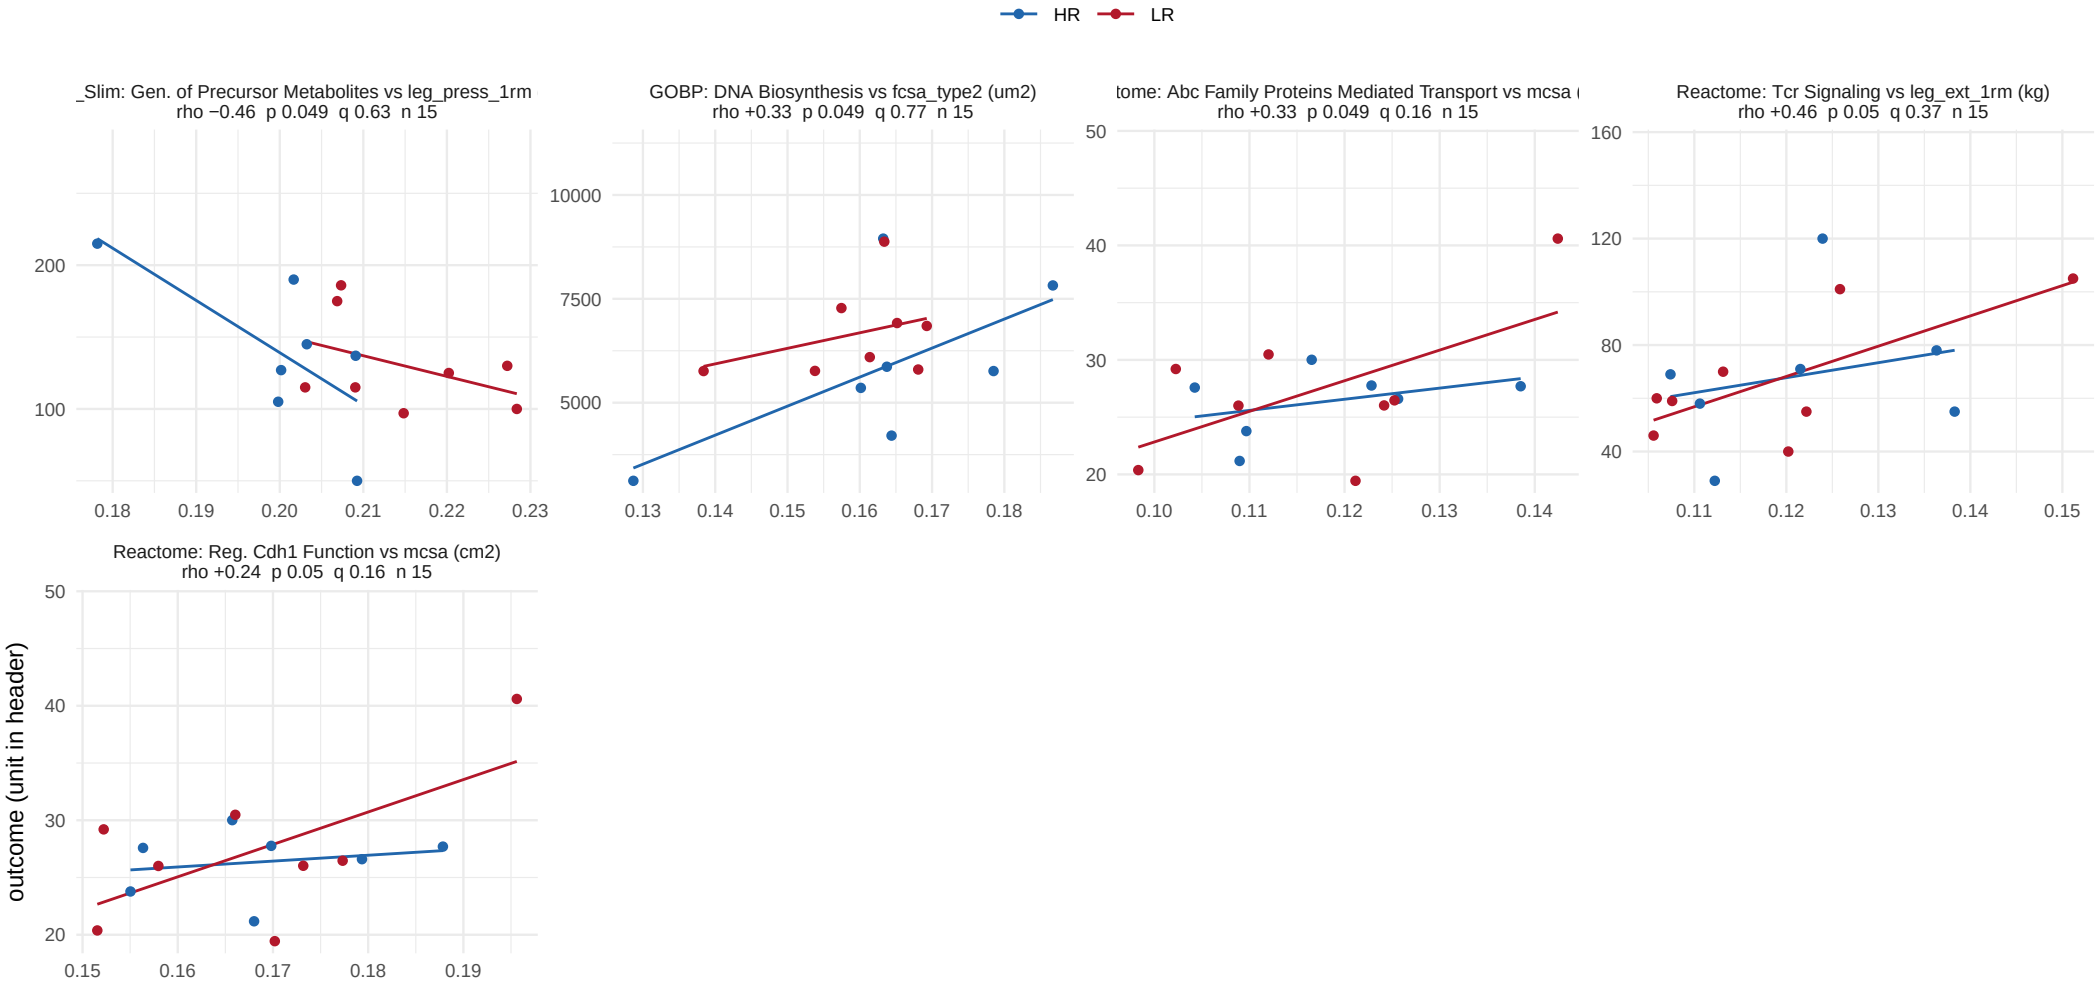

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, post_level window


346 of 8268 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 1 of 29.

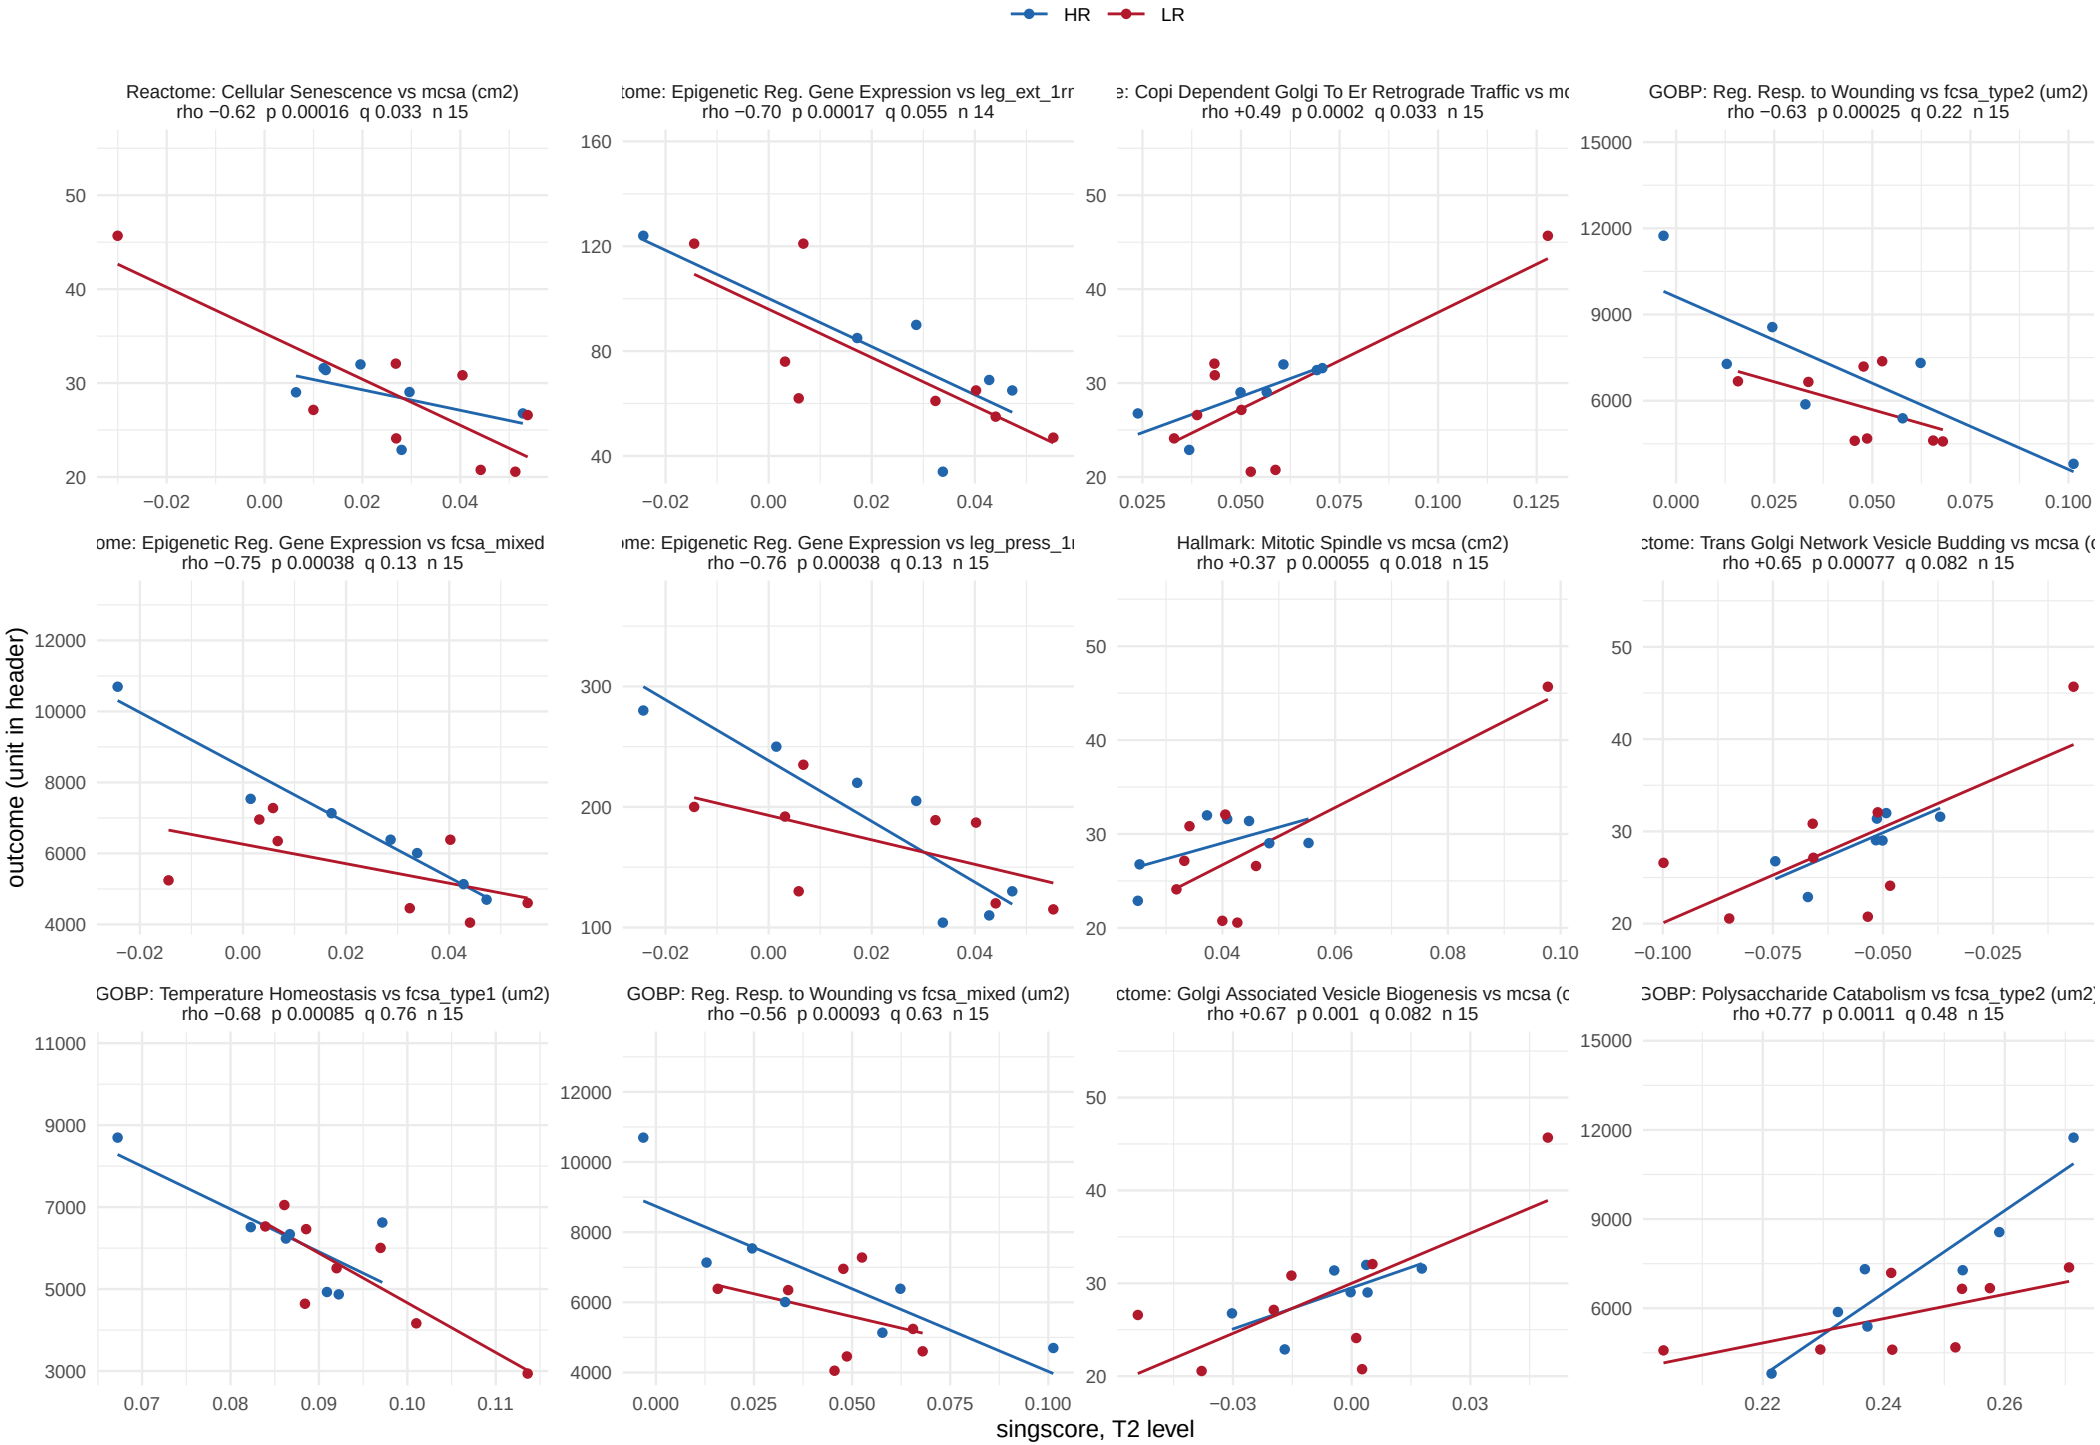

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, post_level window


346 of 8268 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 2 of 29.

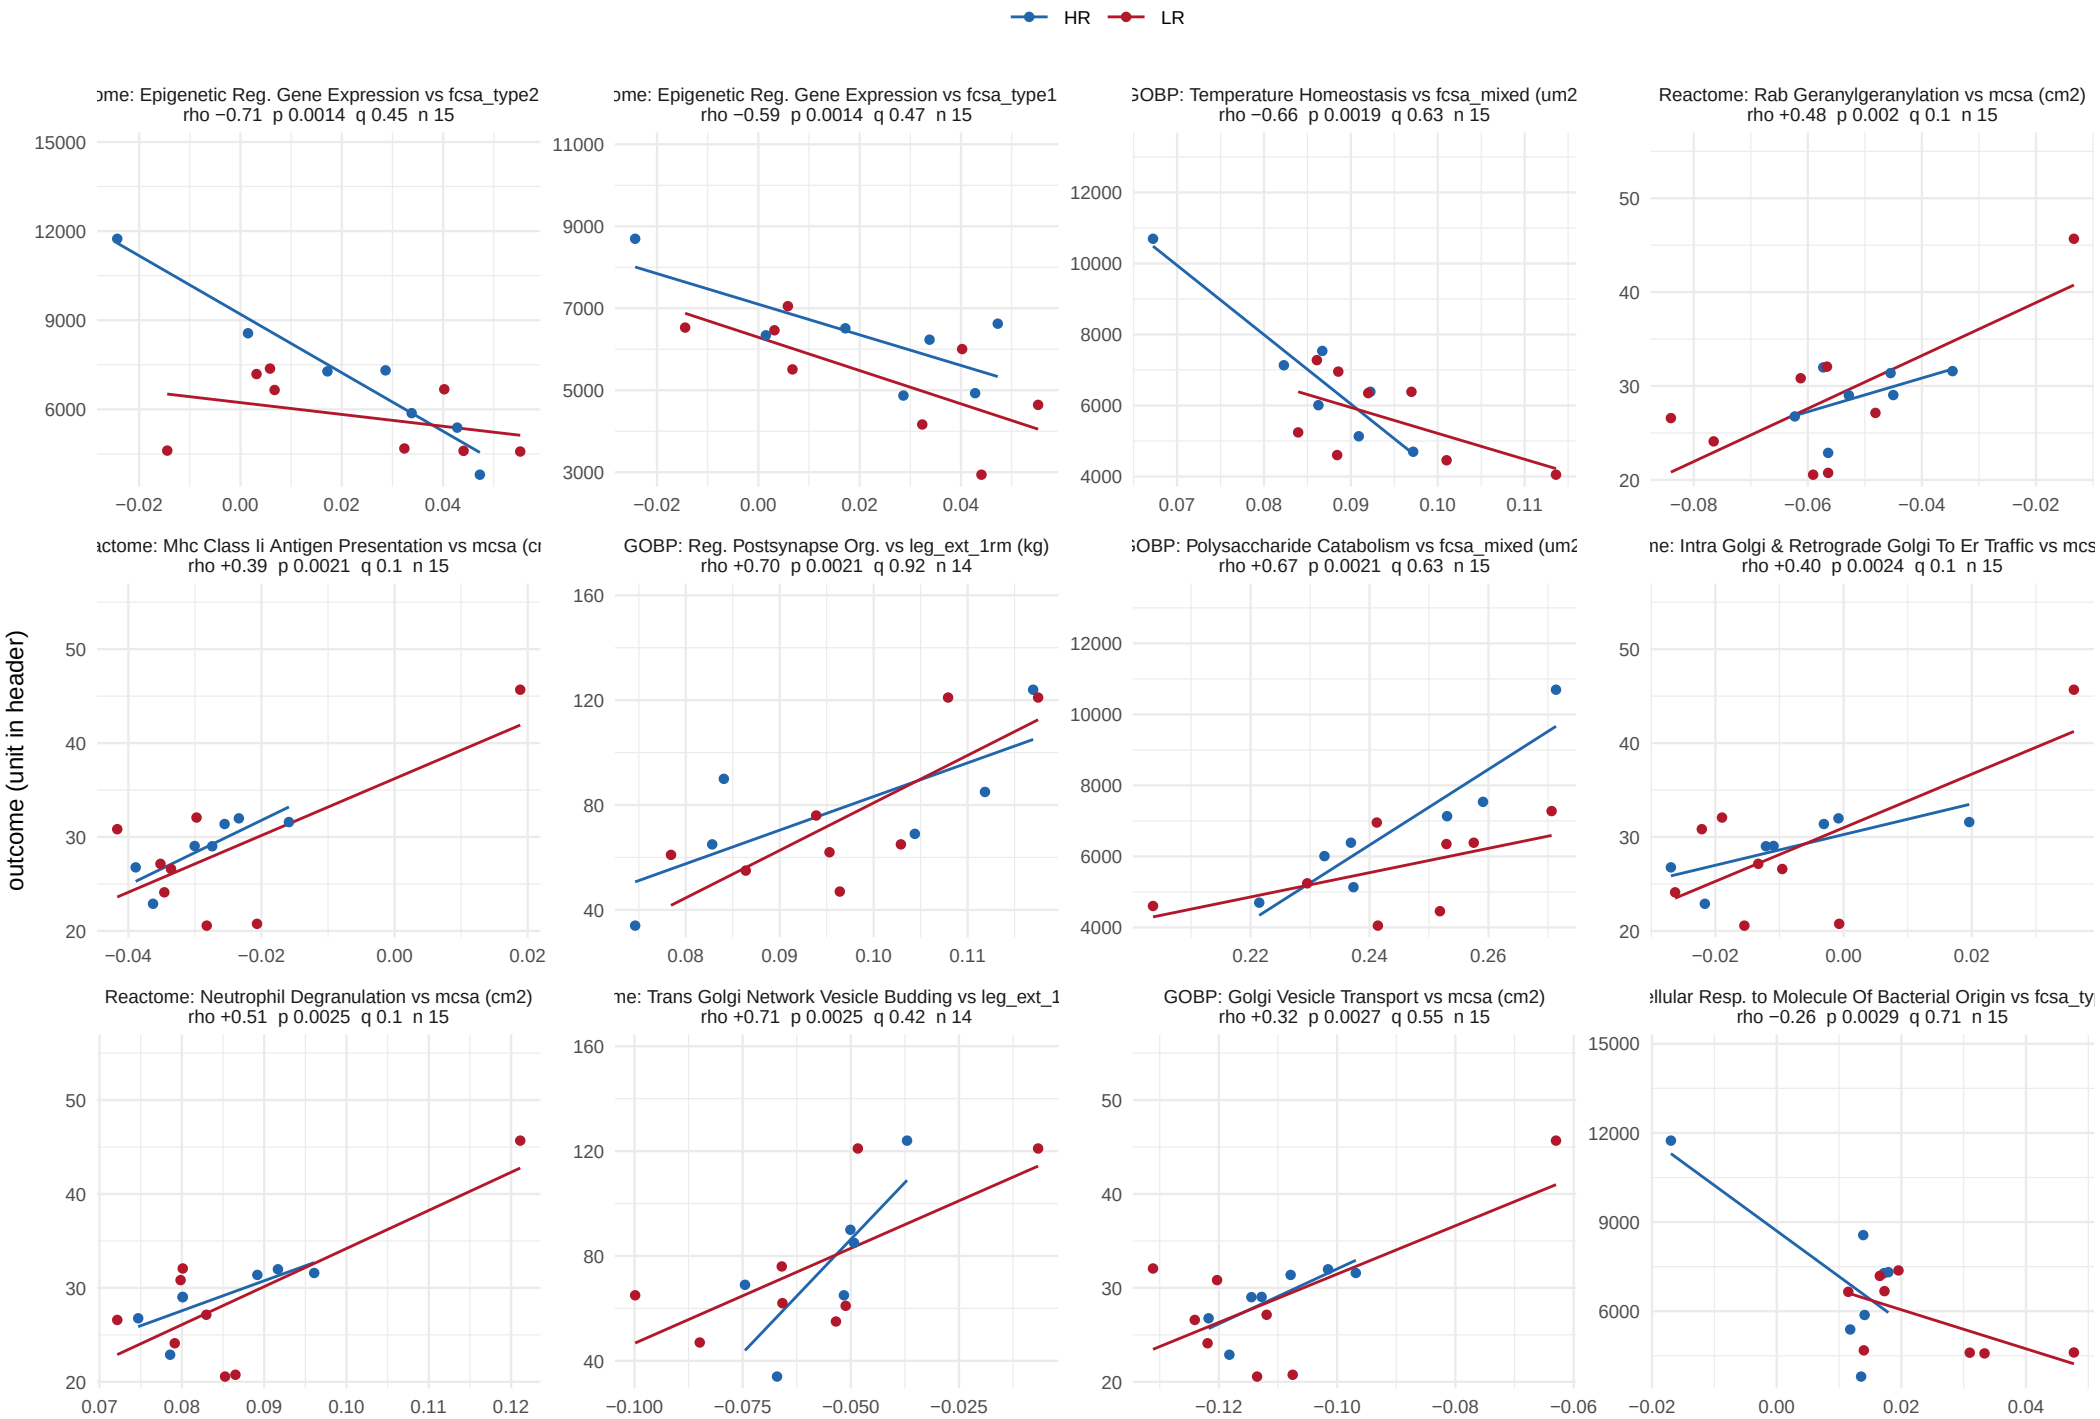

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, post_level window


346 of 8268 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 3 of 29.

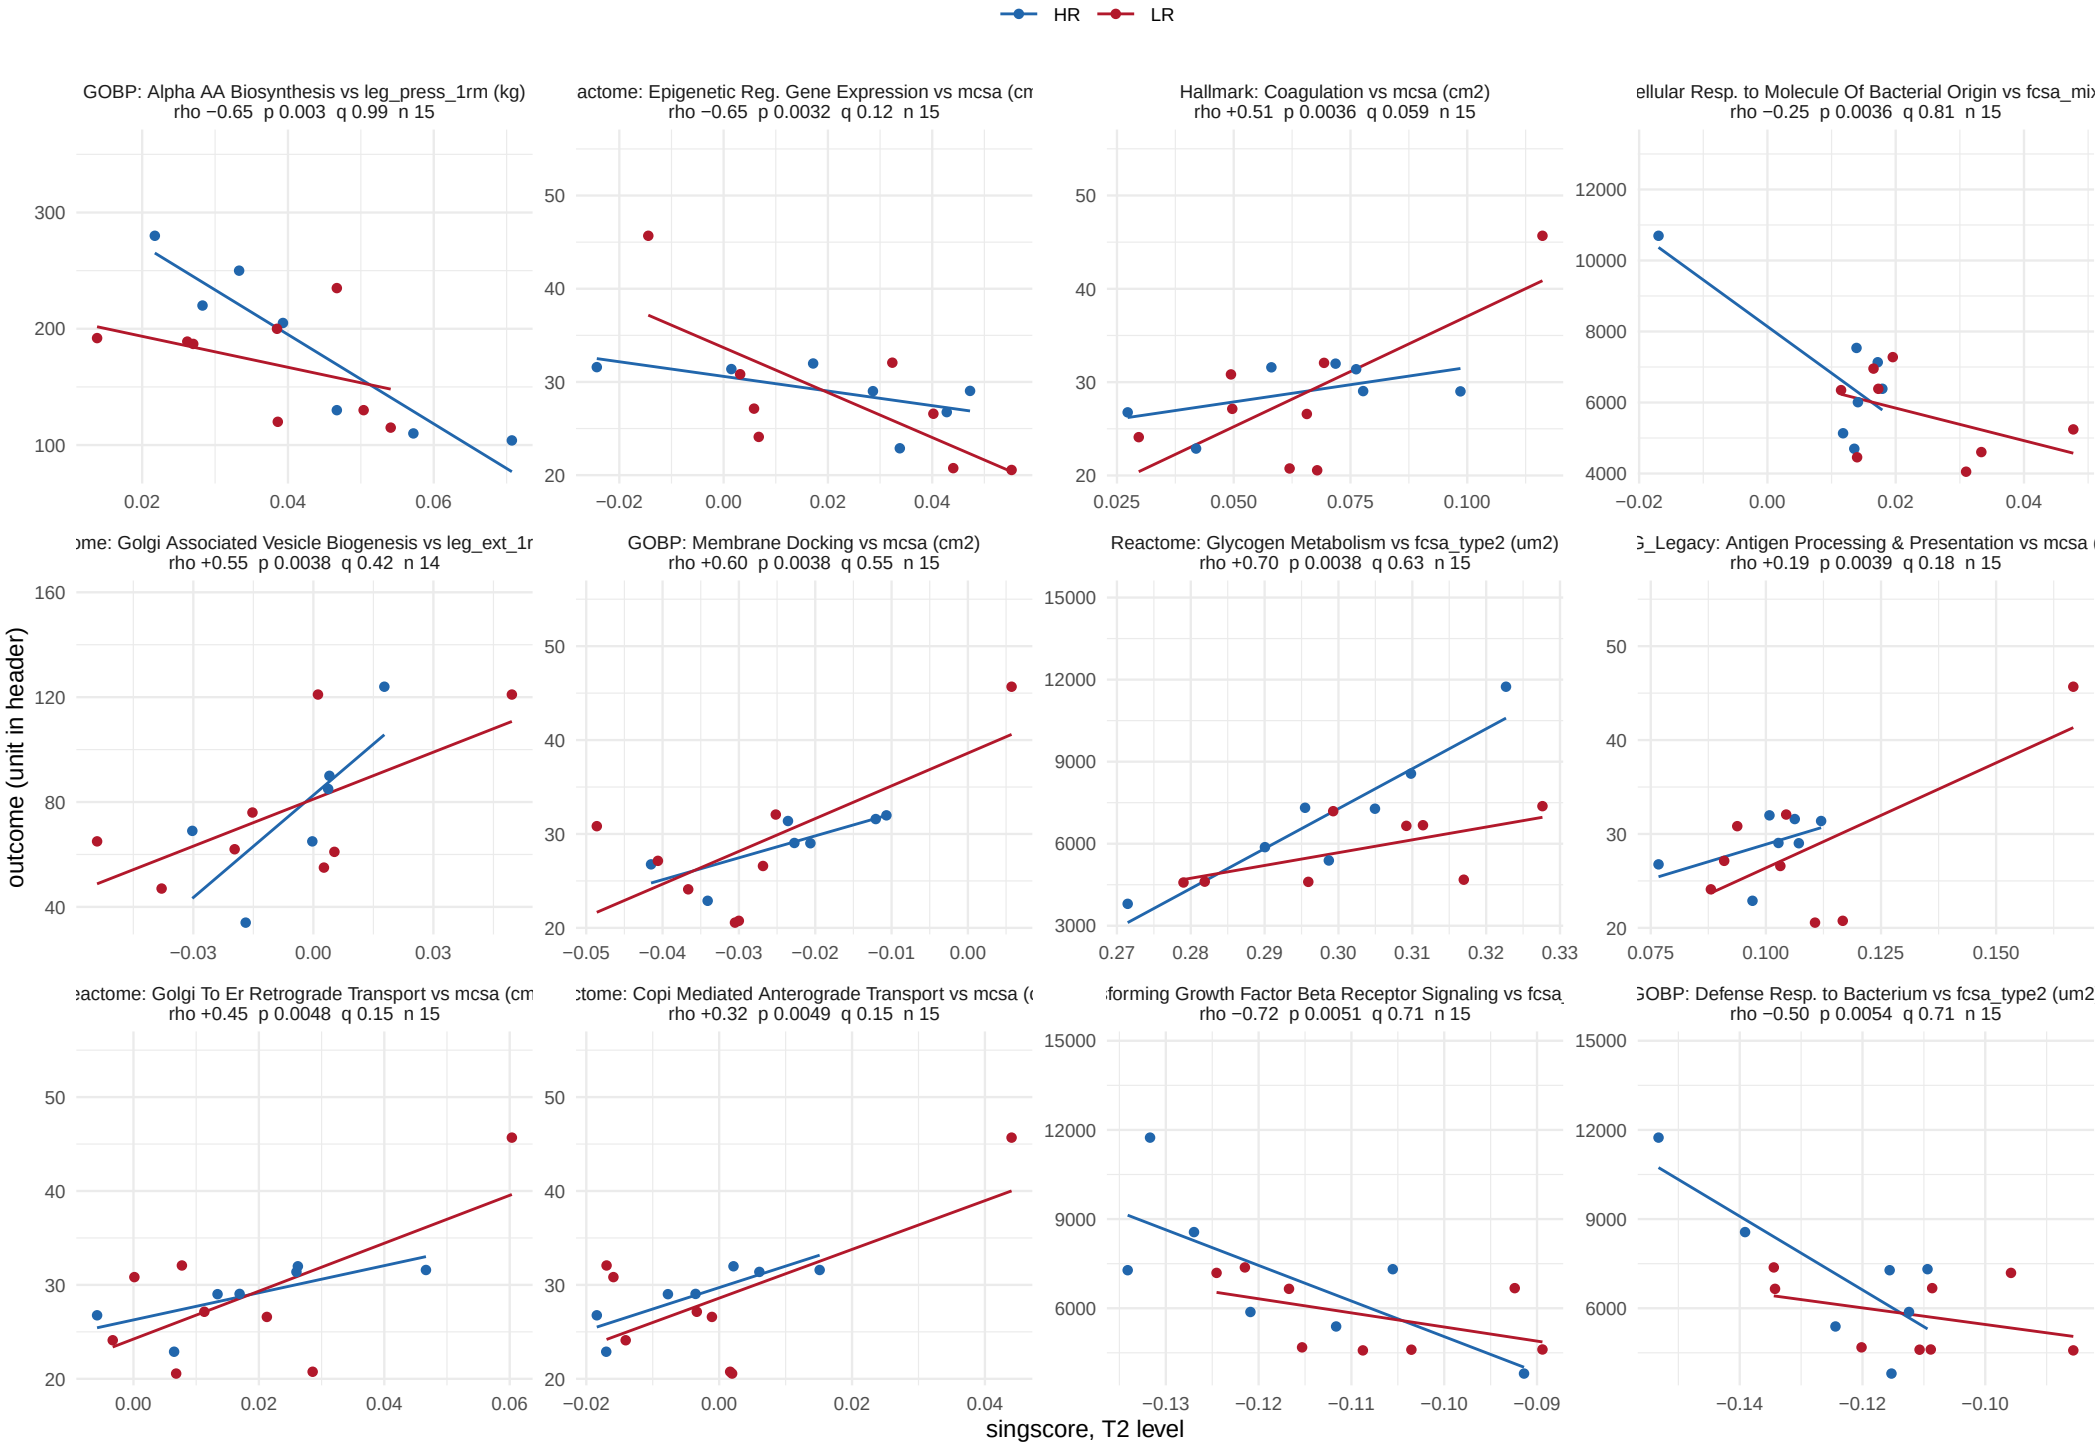

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, post_level window


346 of 8268 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 4 of 29.

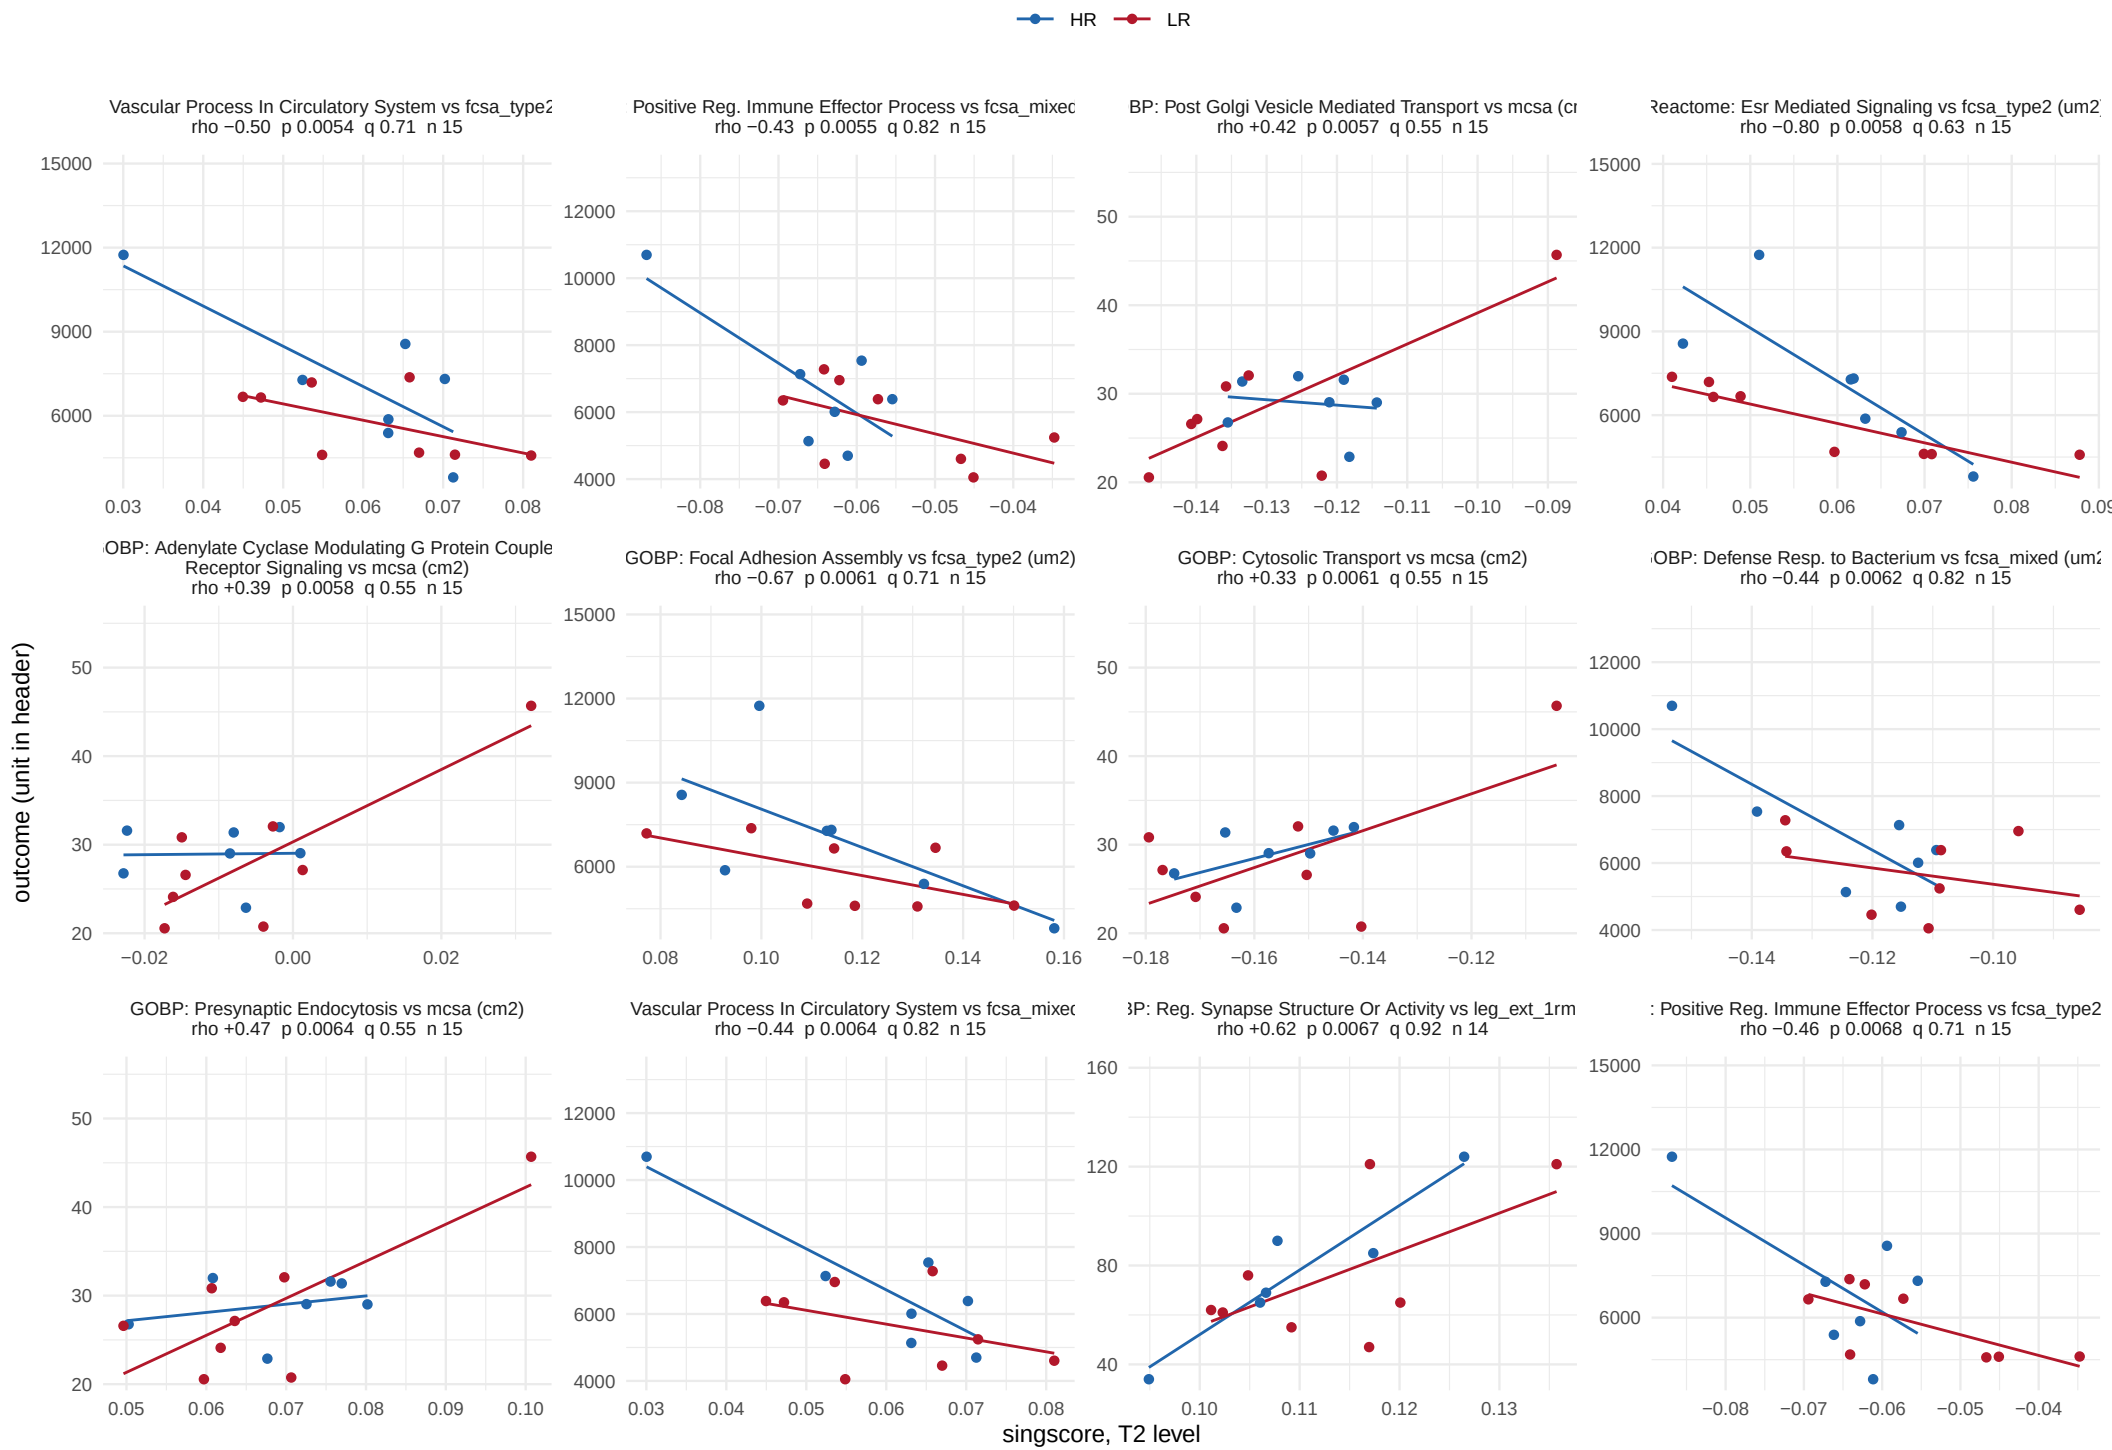

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, post_level window


346 of 8268 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 5 of 29.

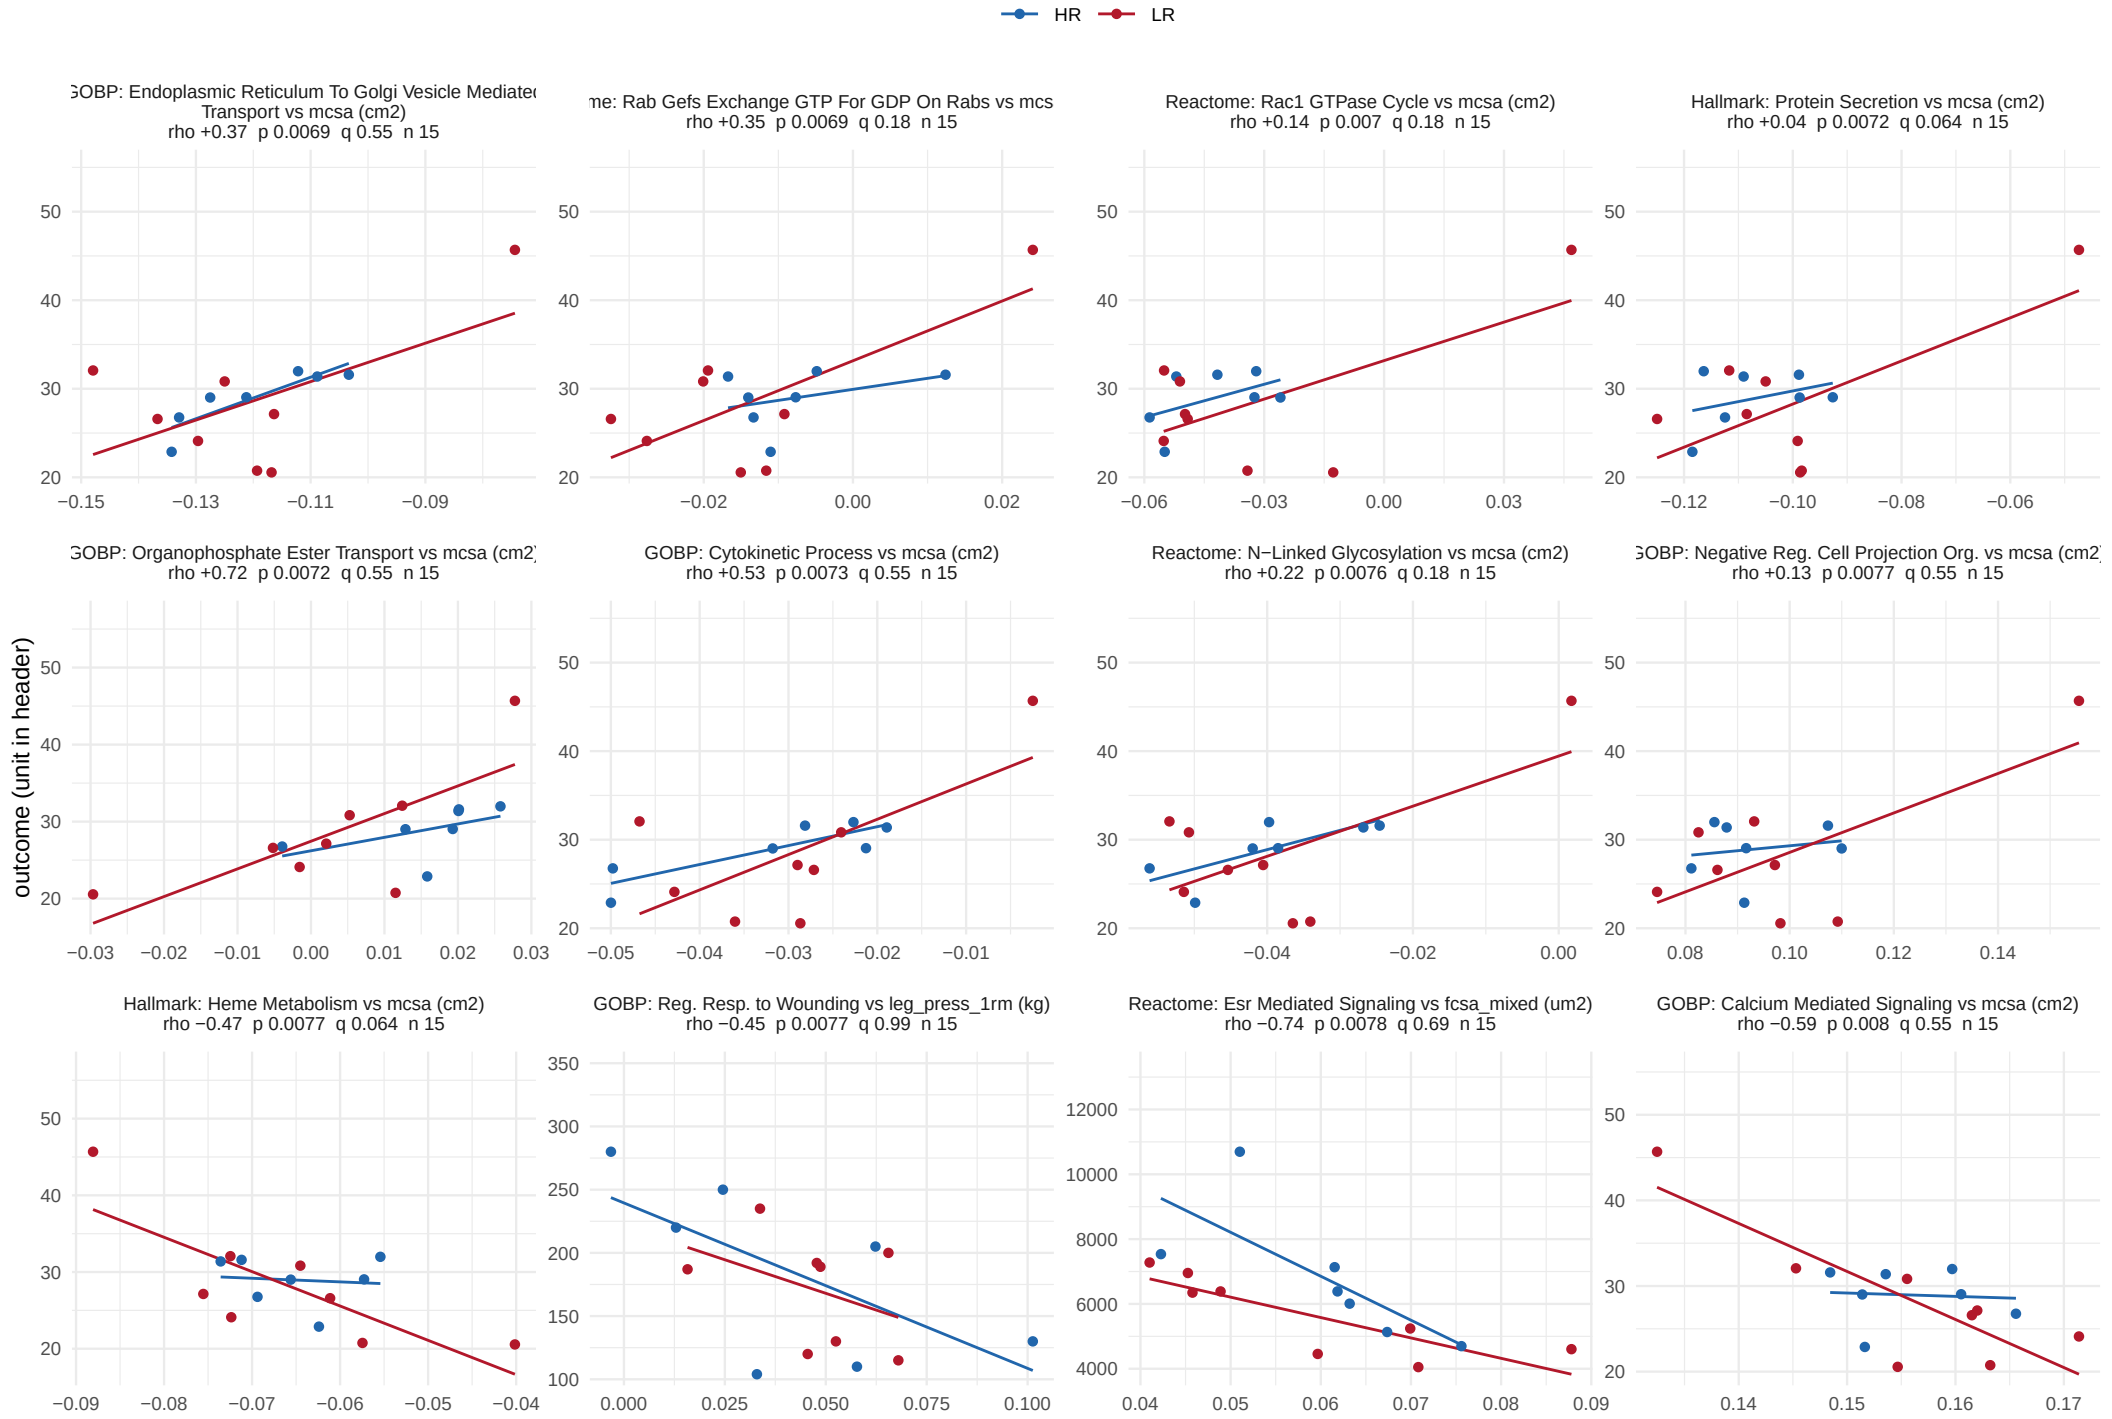

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, post_level window


346 of 8268 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 6 of 29.

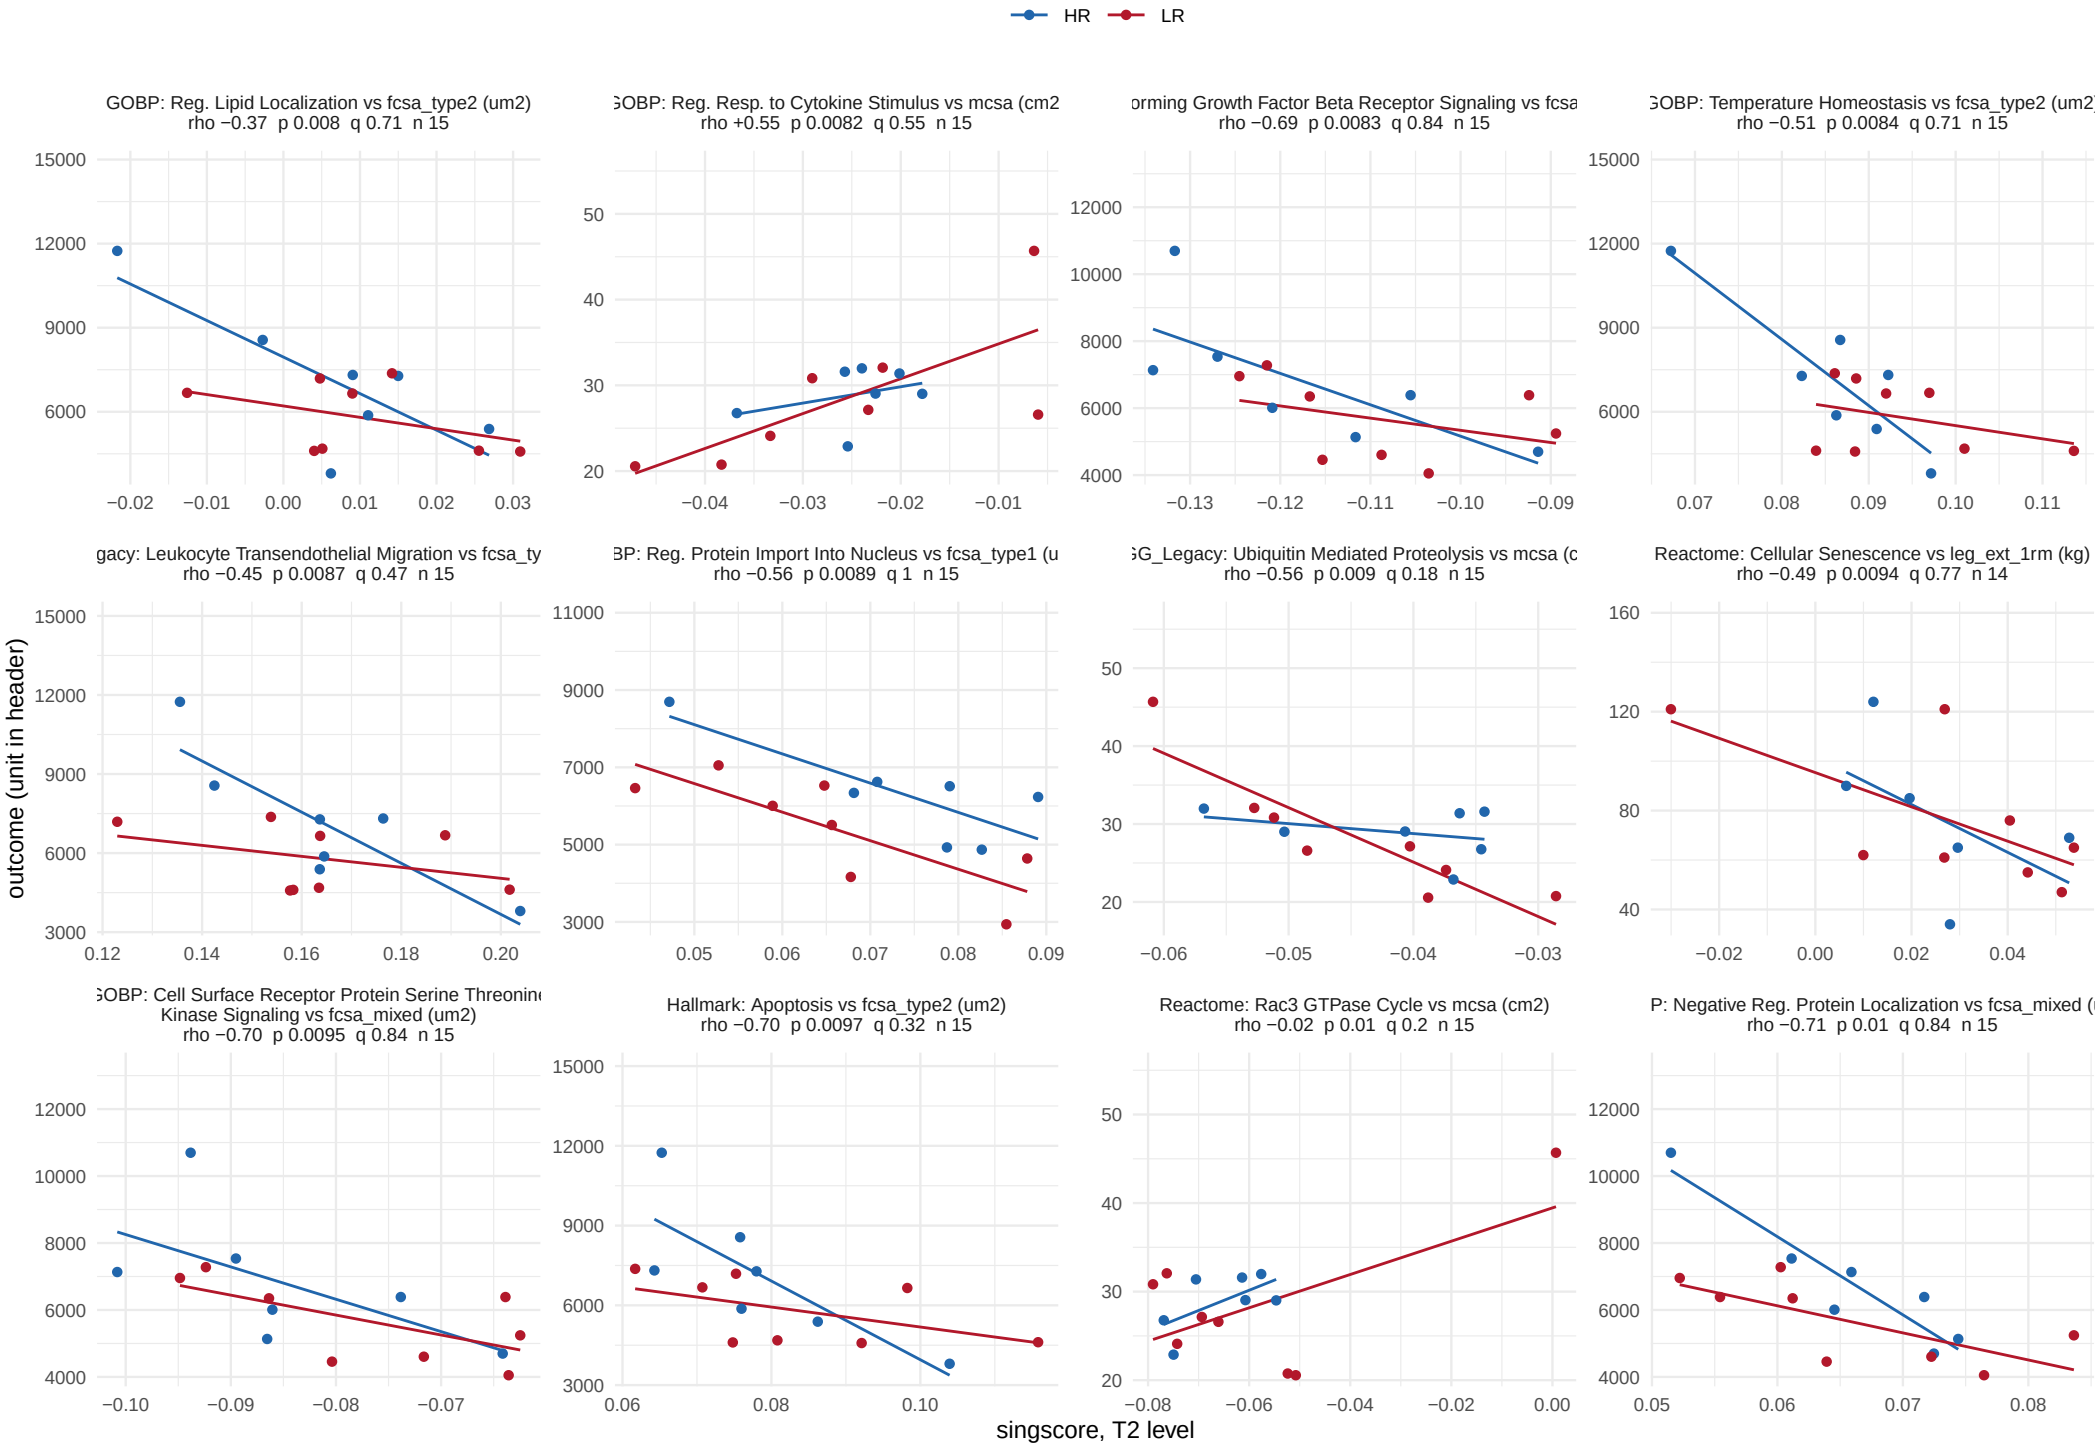

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, post_level window


346 of 8268 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 7 of 29.

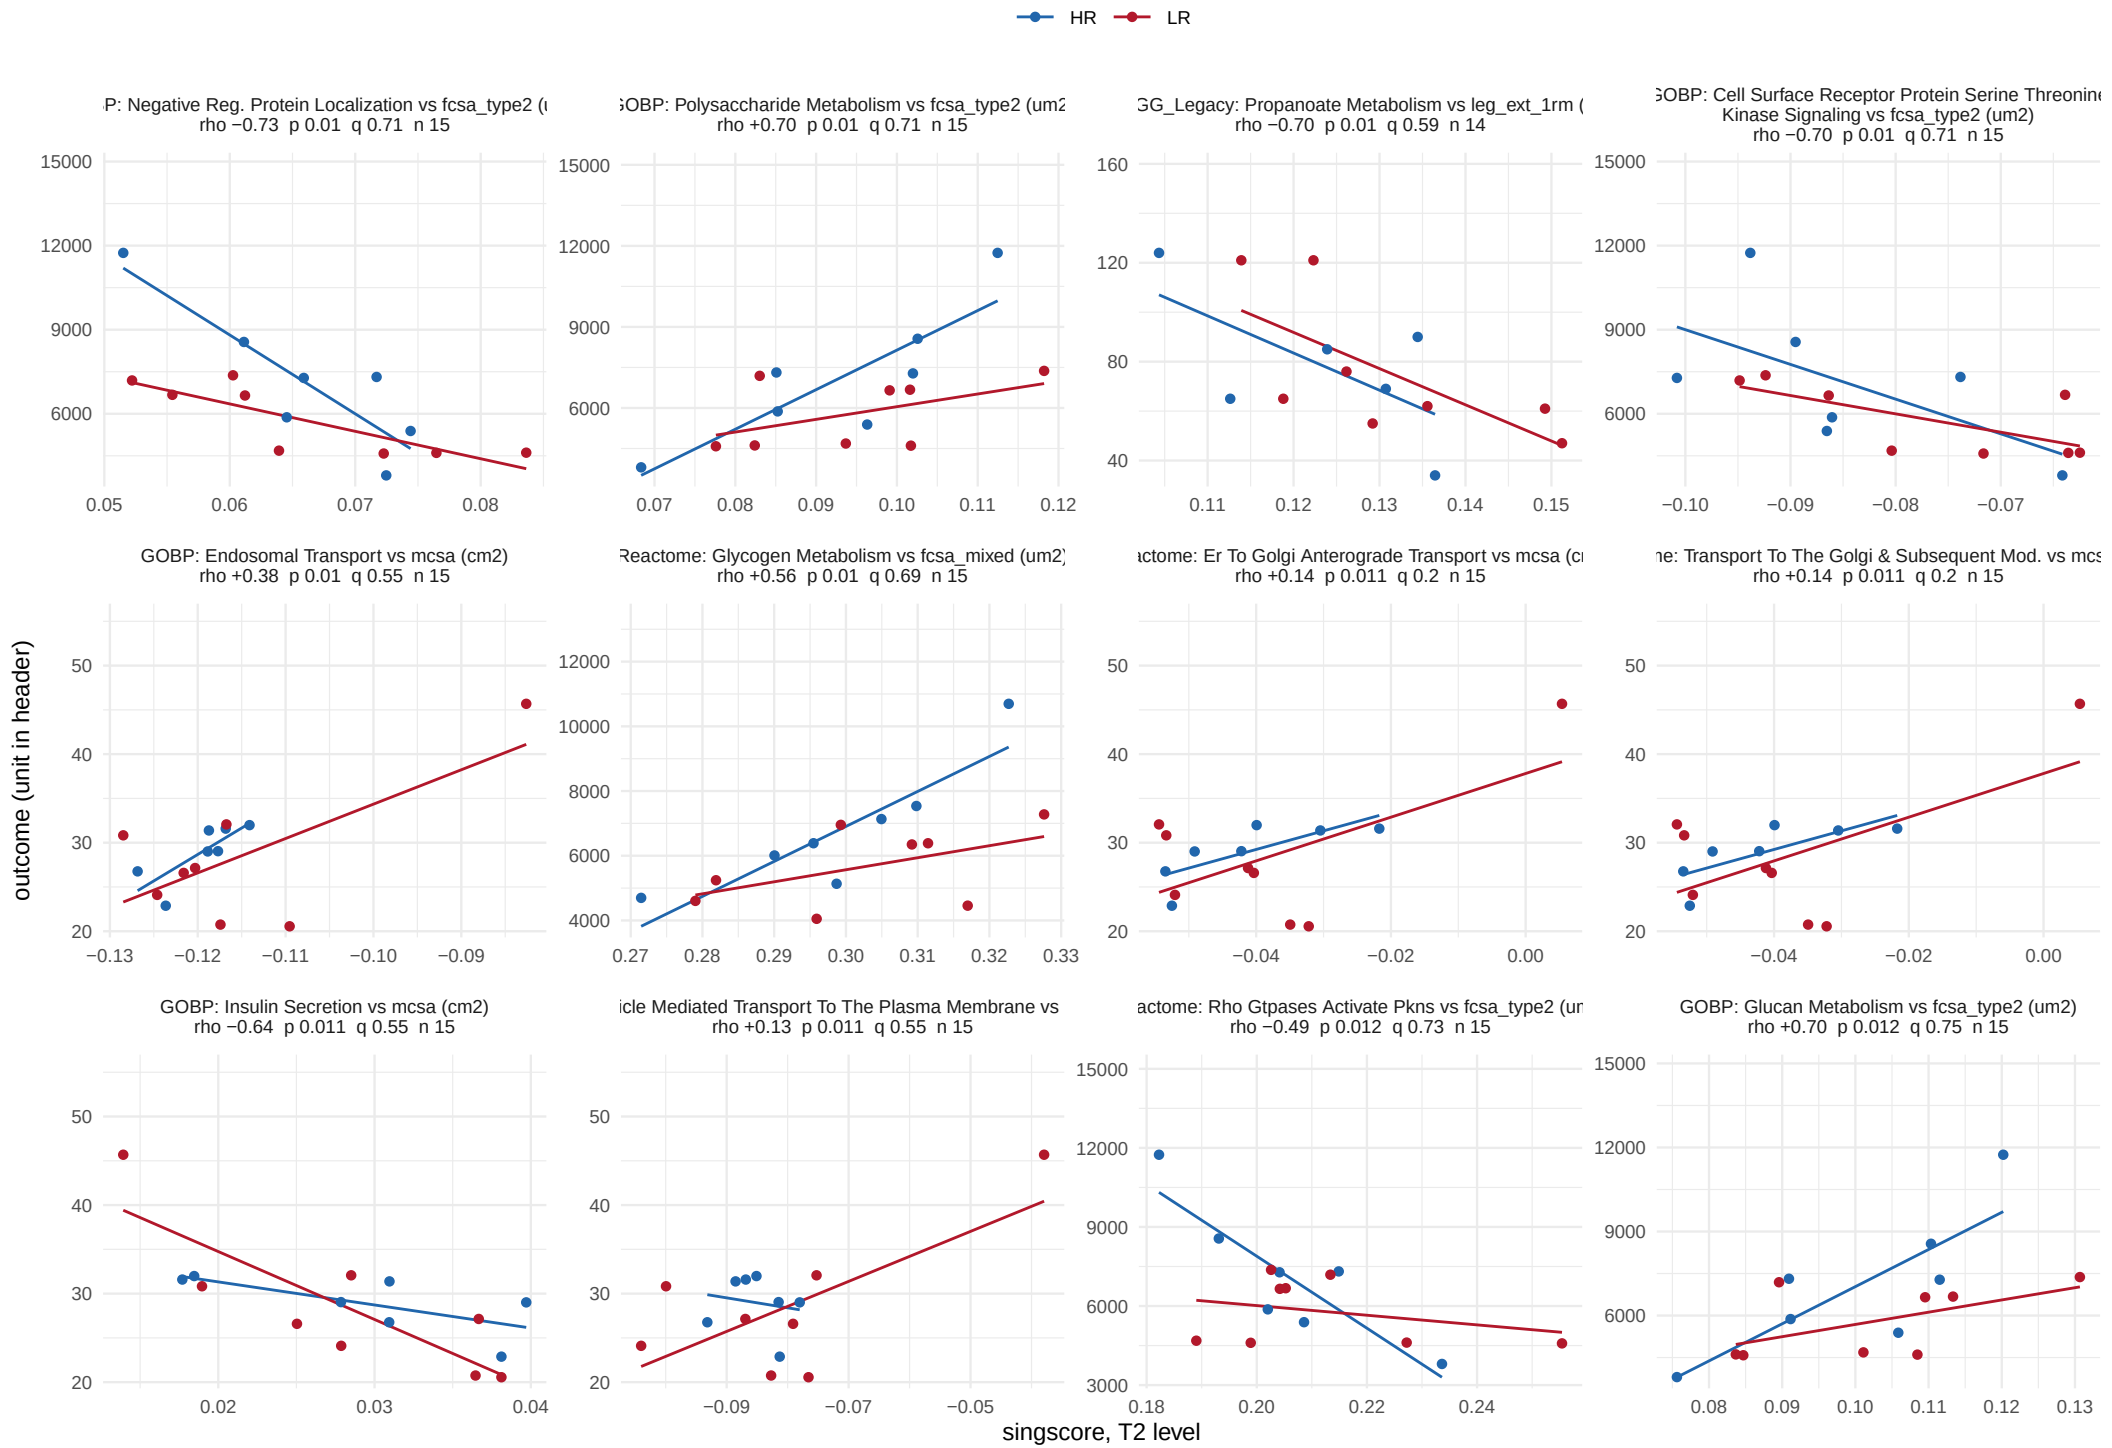

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, post_level window


346 of 8268 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 8 of 29.

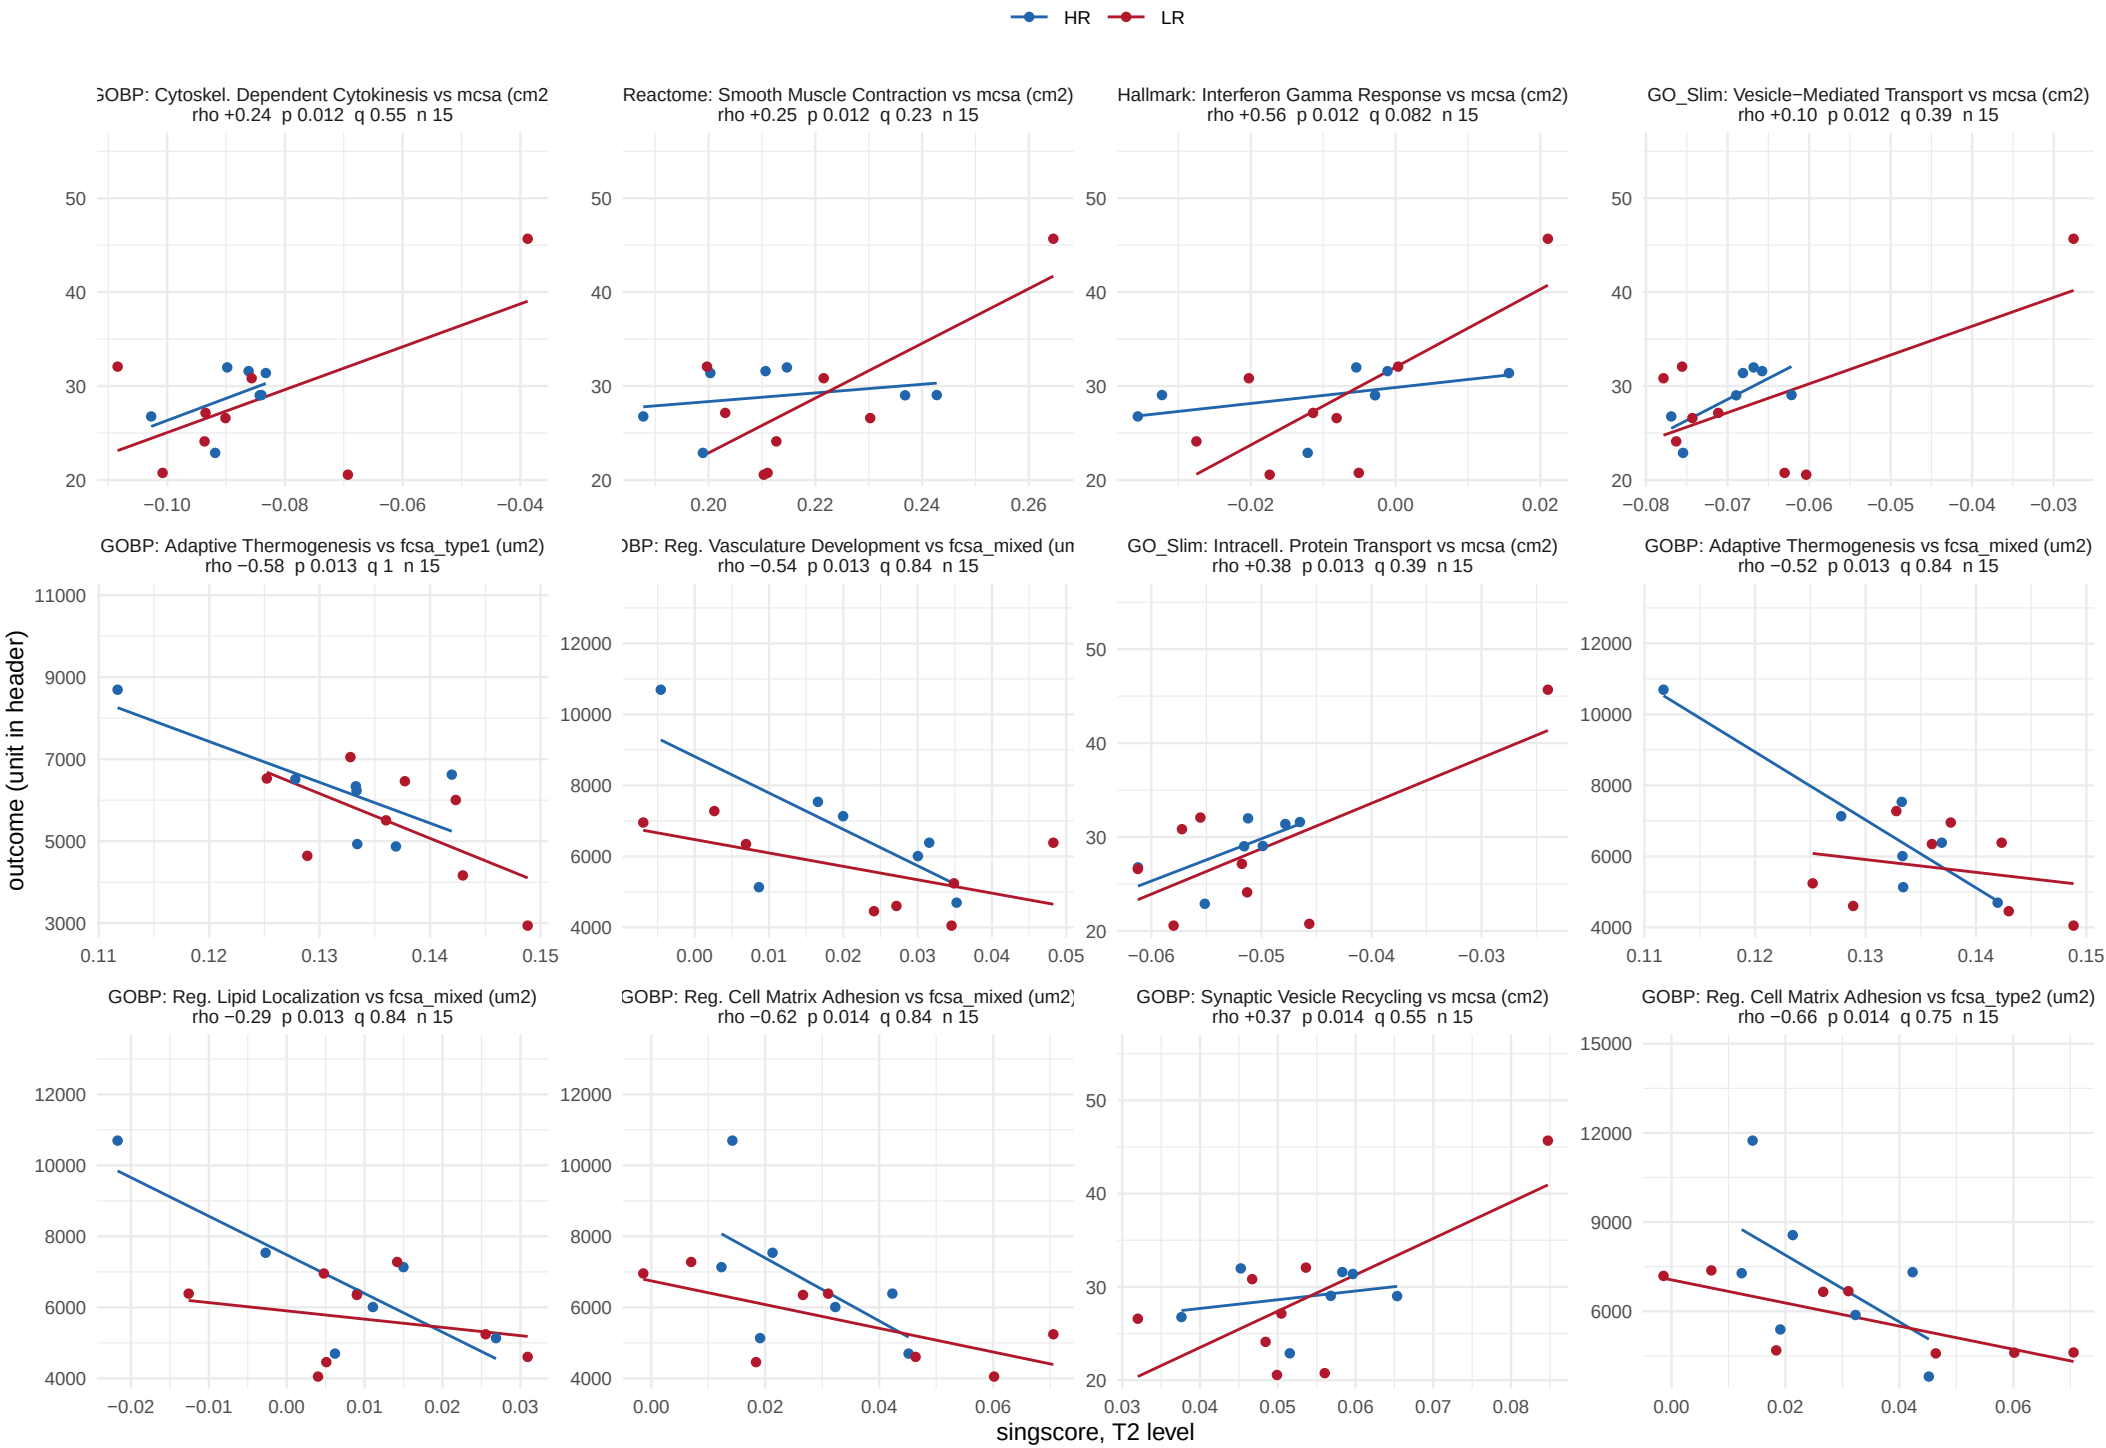

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, post_level window


346 of 8268 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 9 of 29.

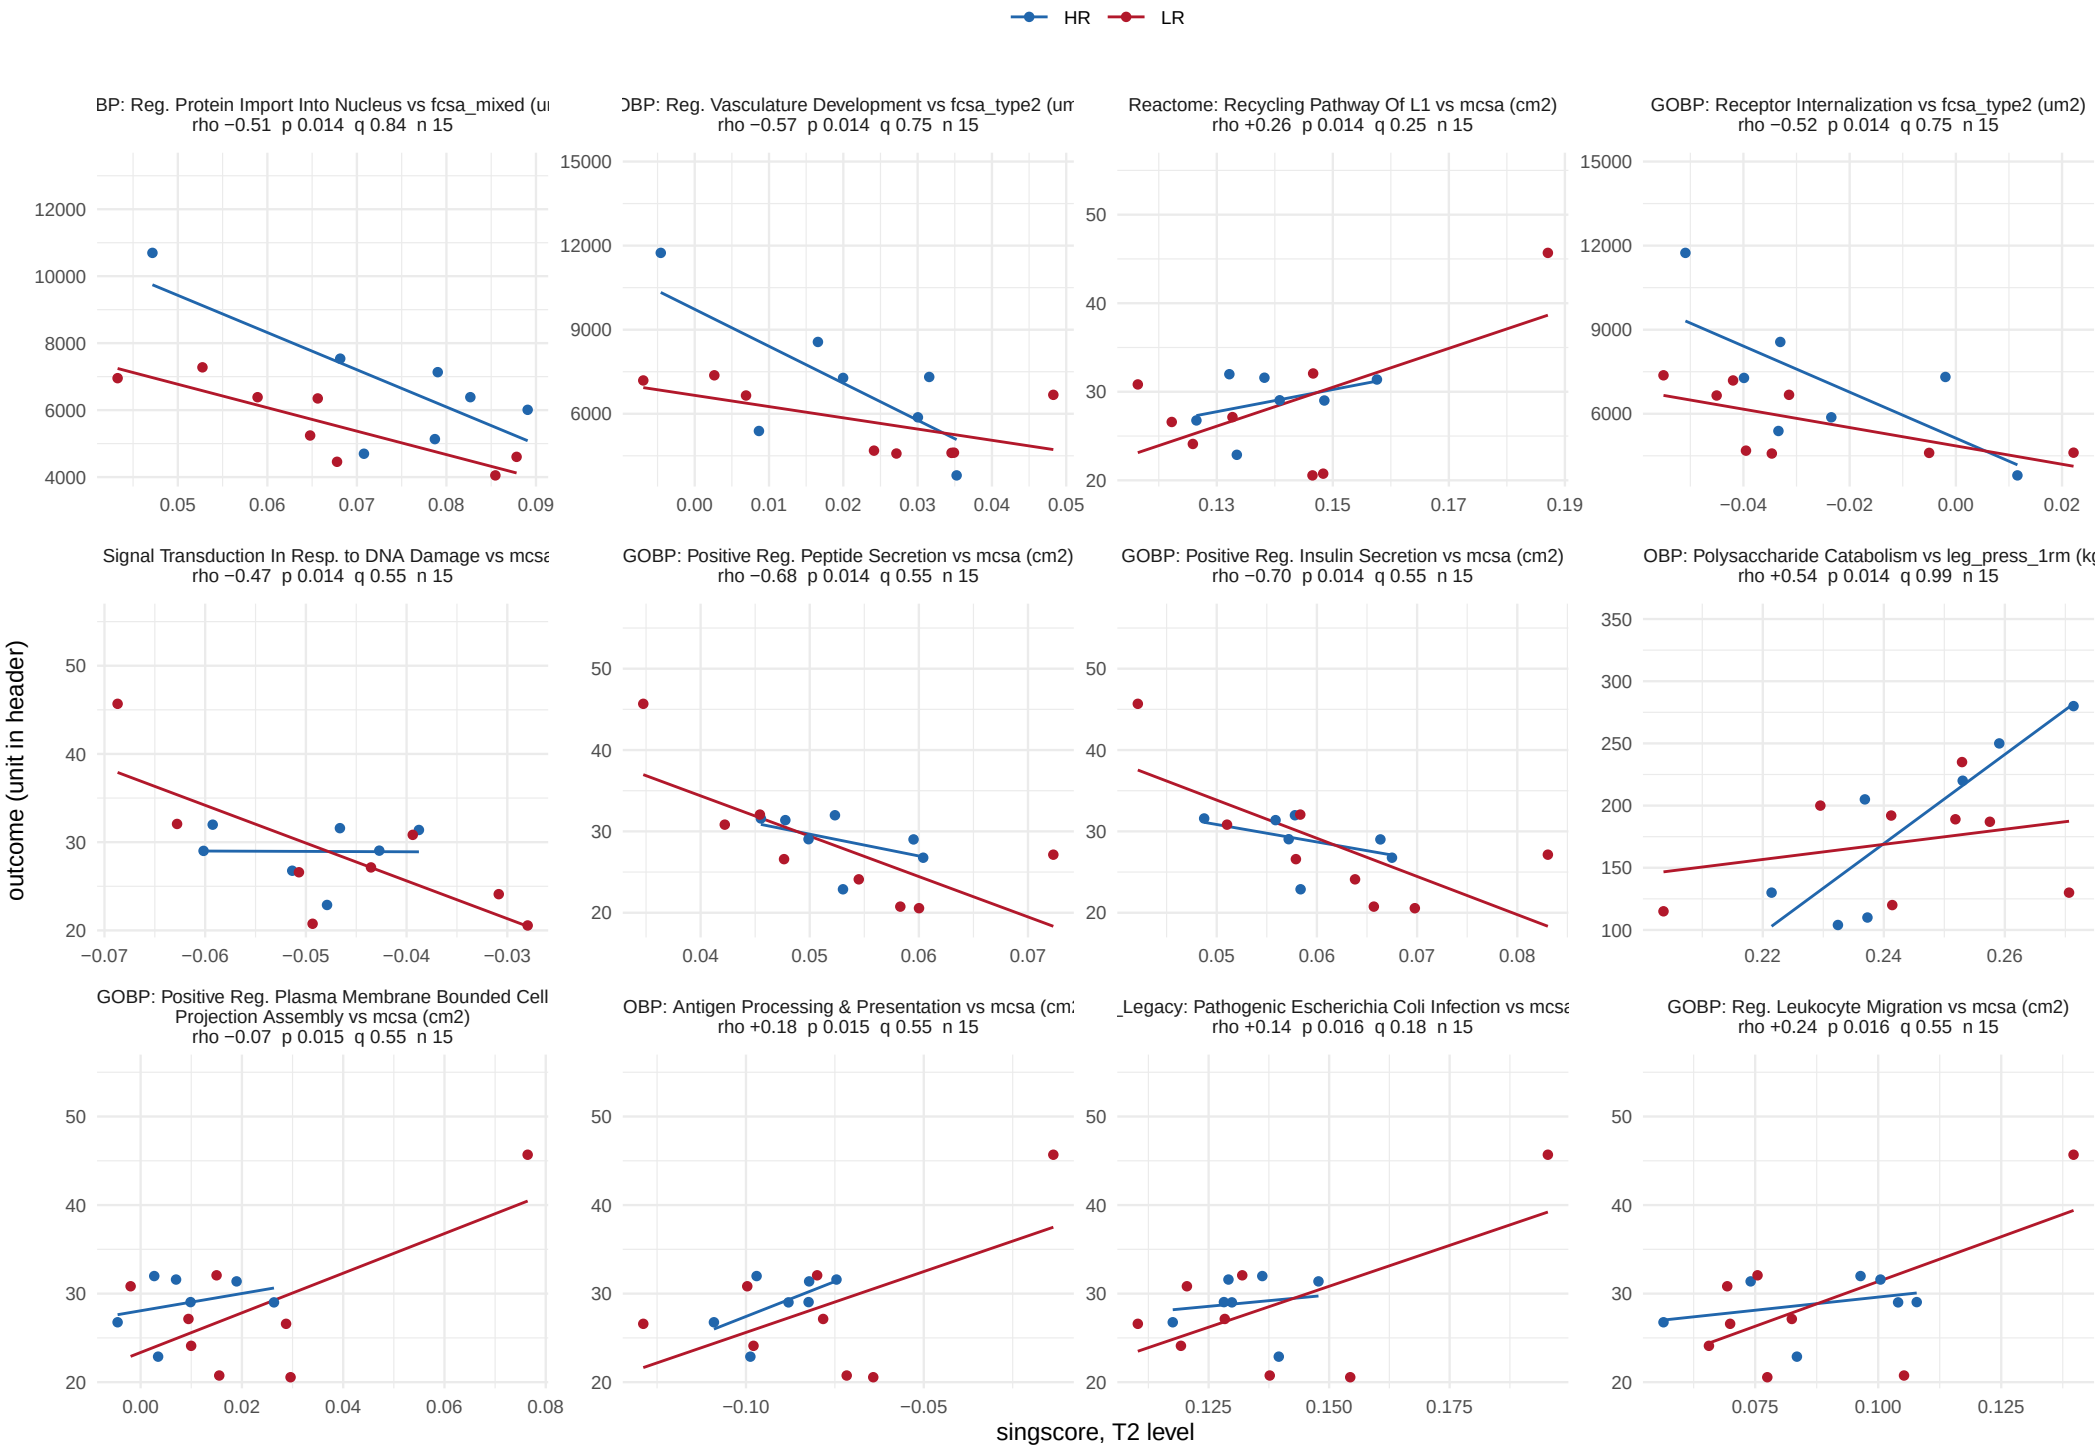

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, post_level window


346 of 8268 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 10 of 29.

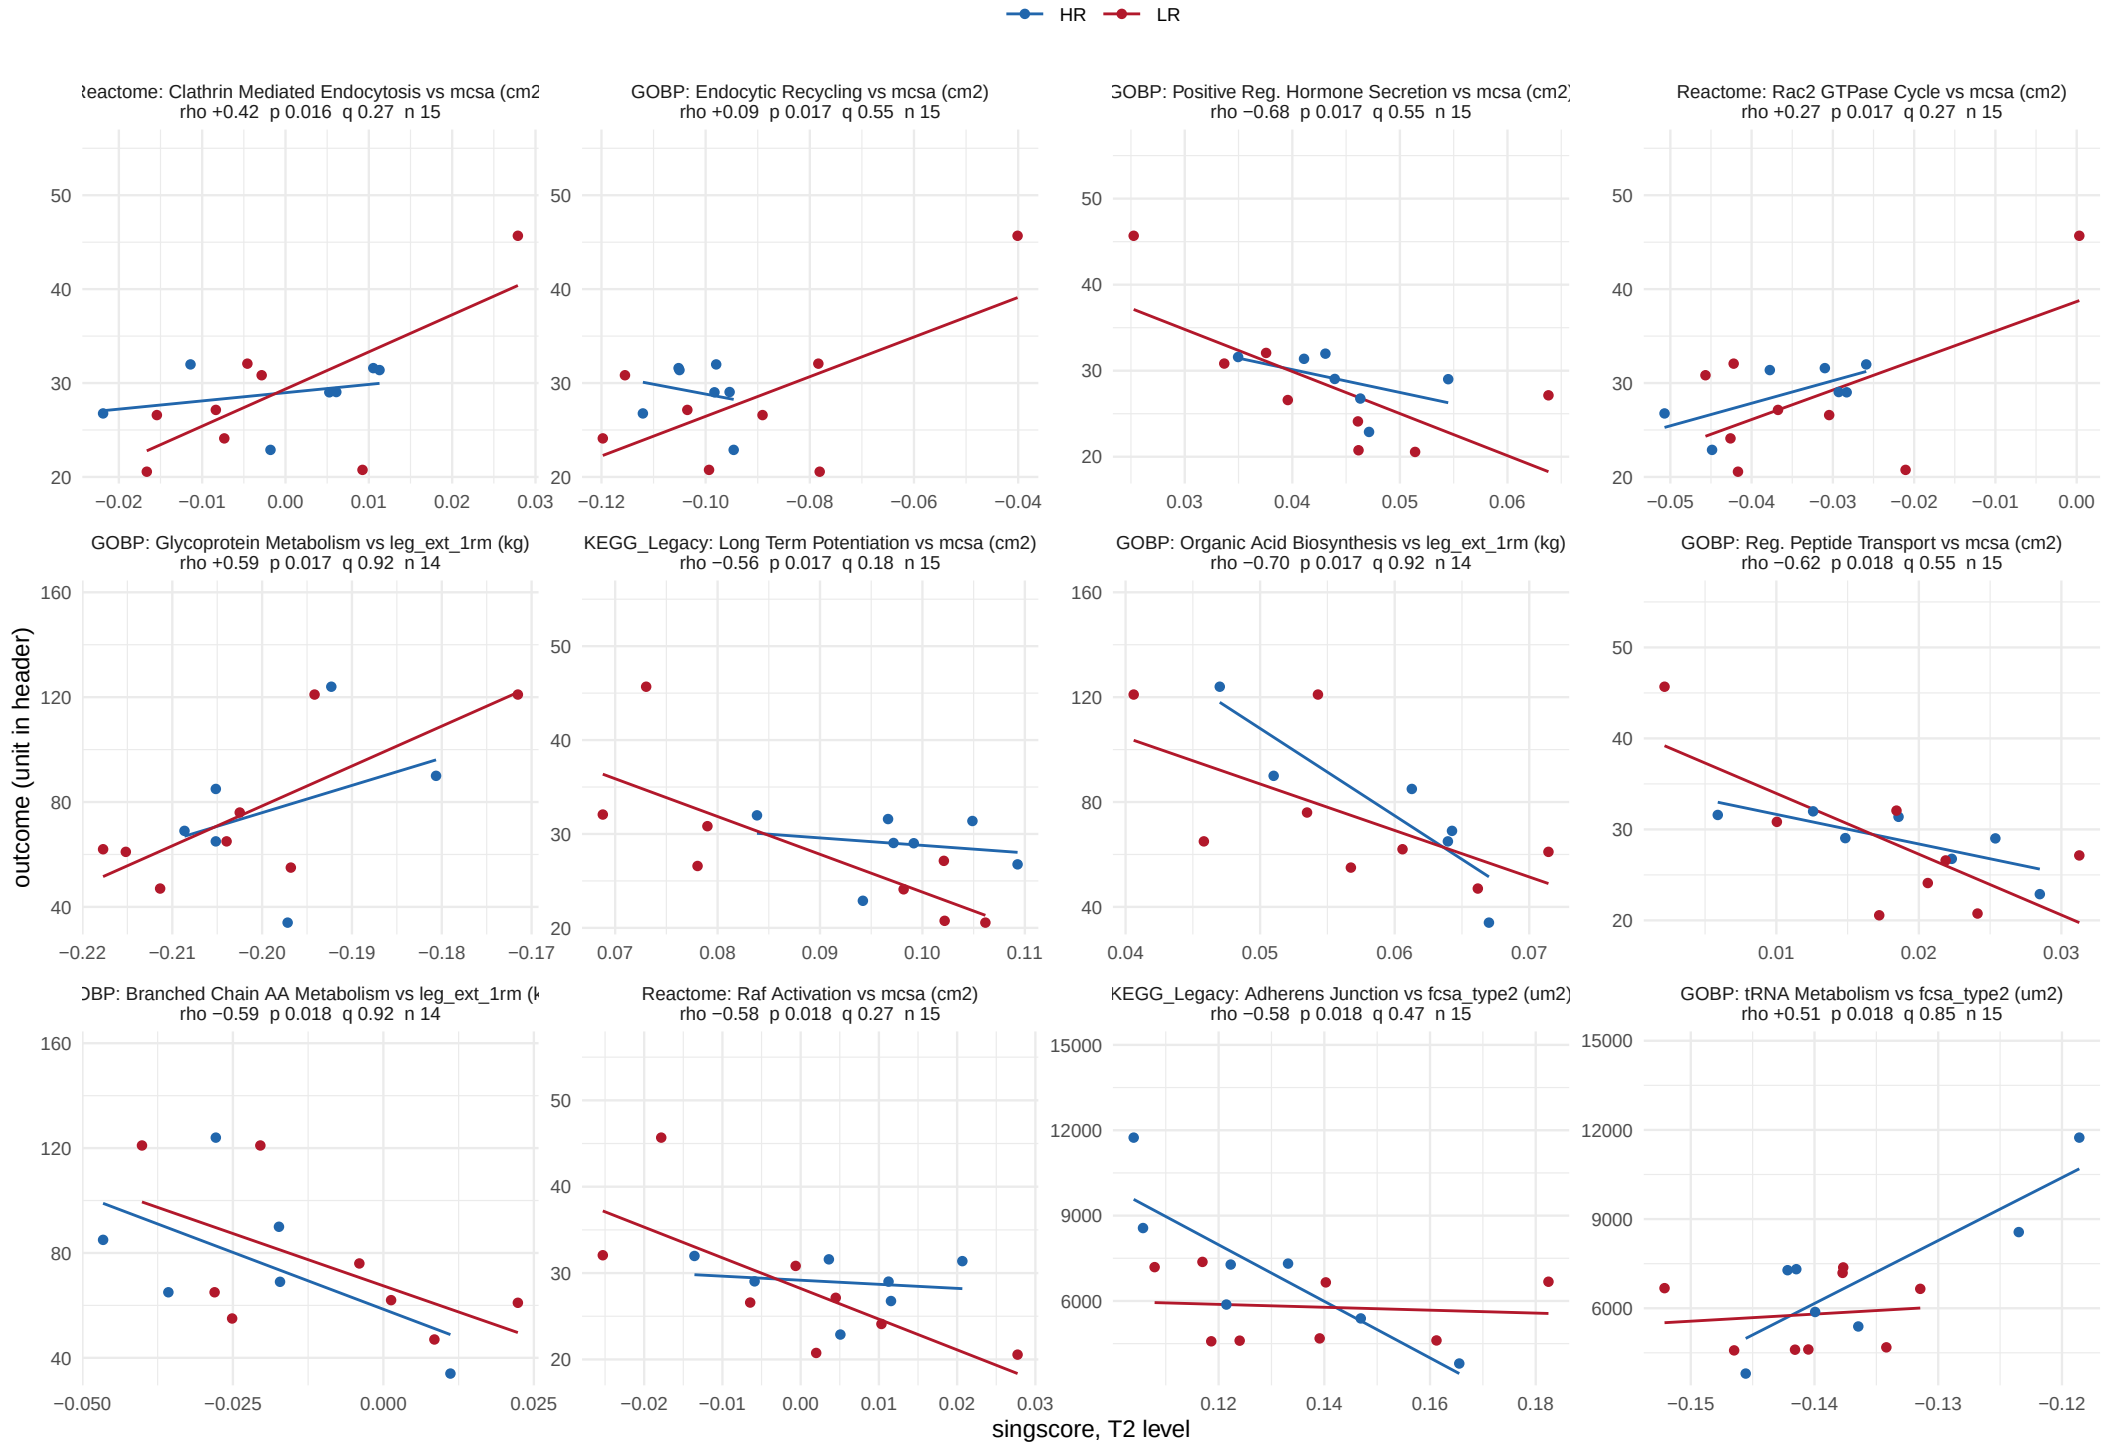

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, post_level window


346 of 8268 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 11 of 29.

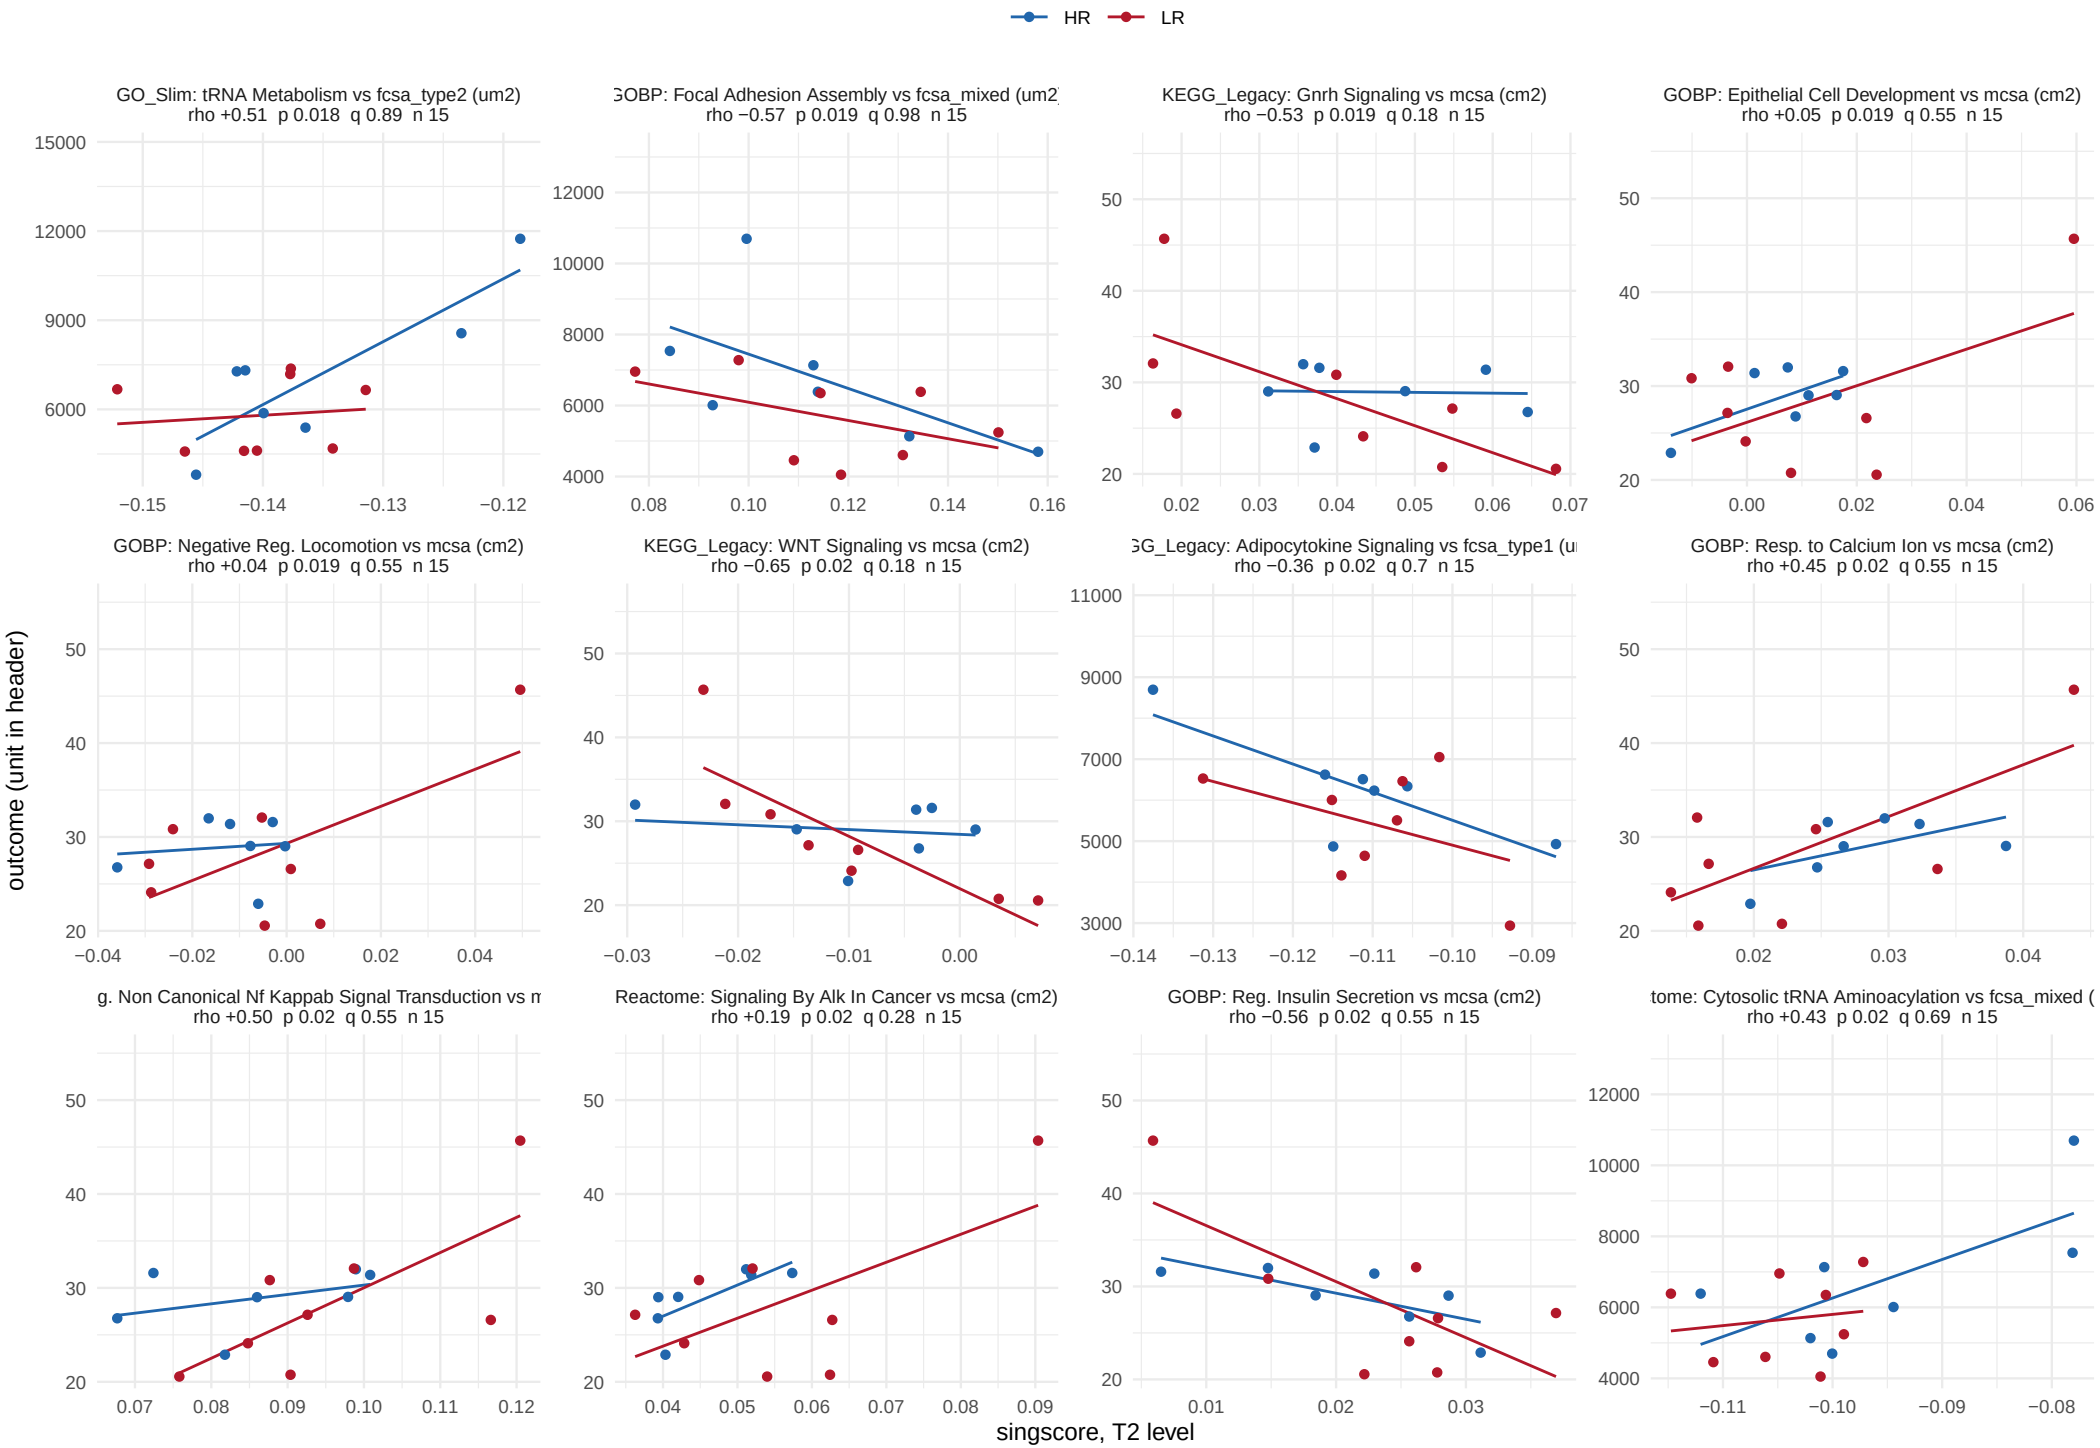

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, post_level window


346 of 8268 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 12 of 29.

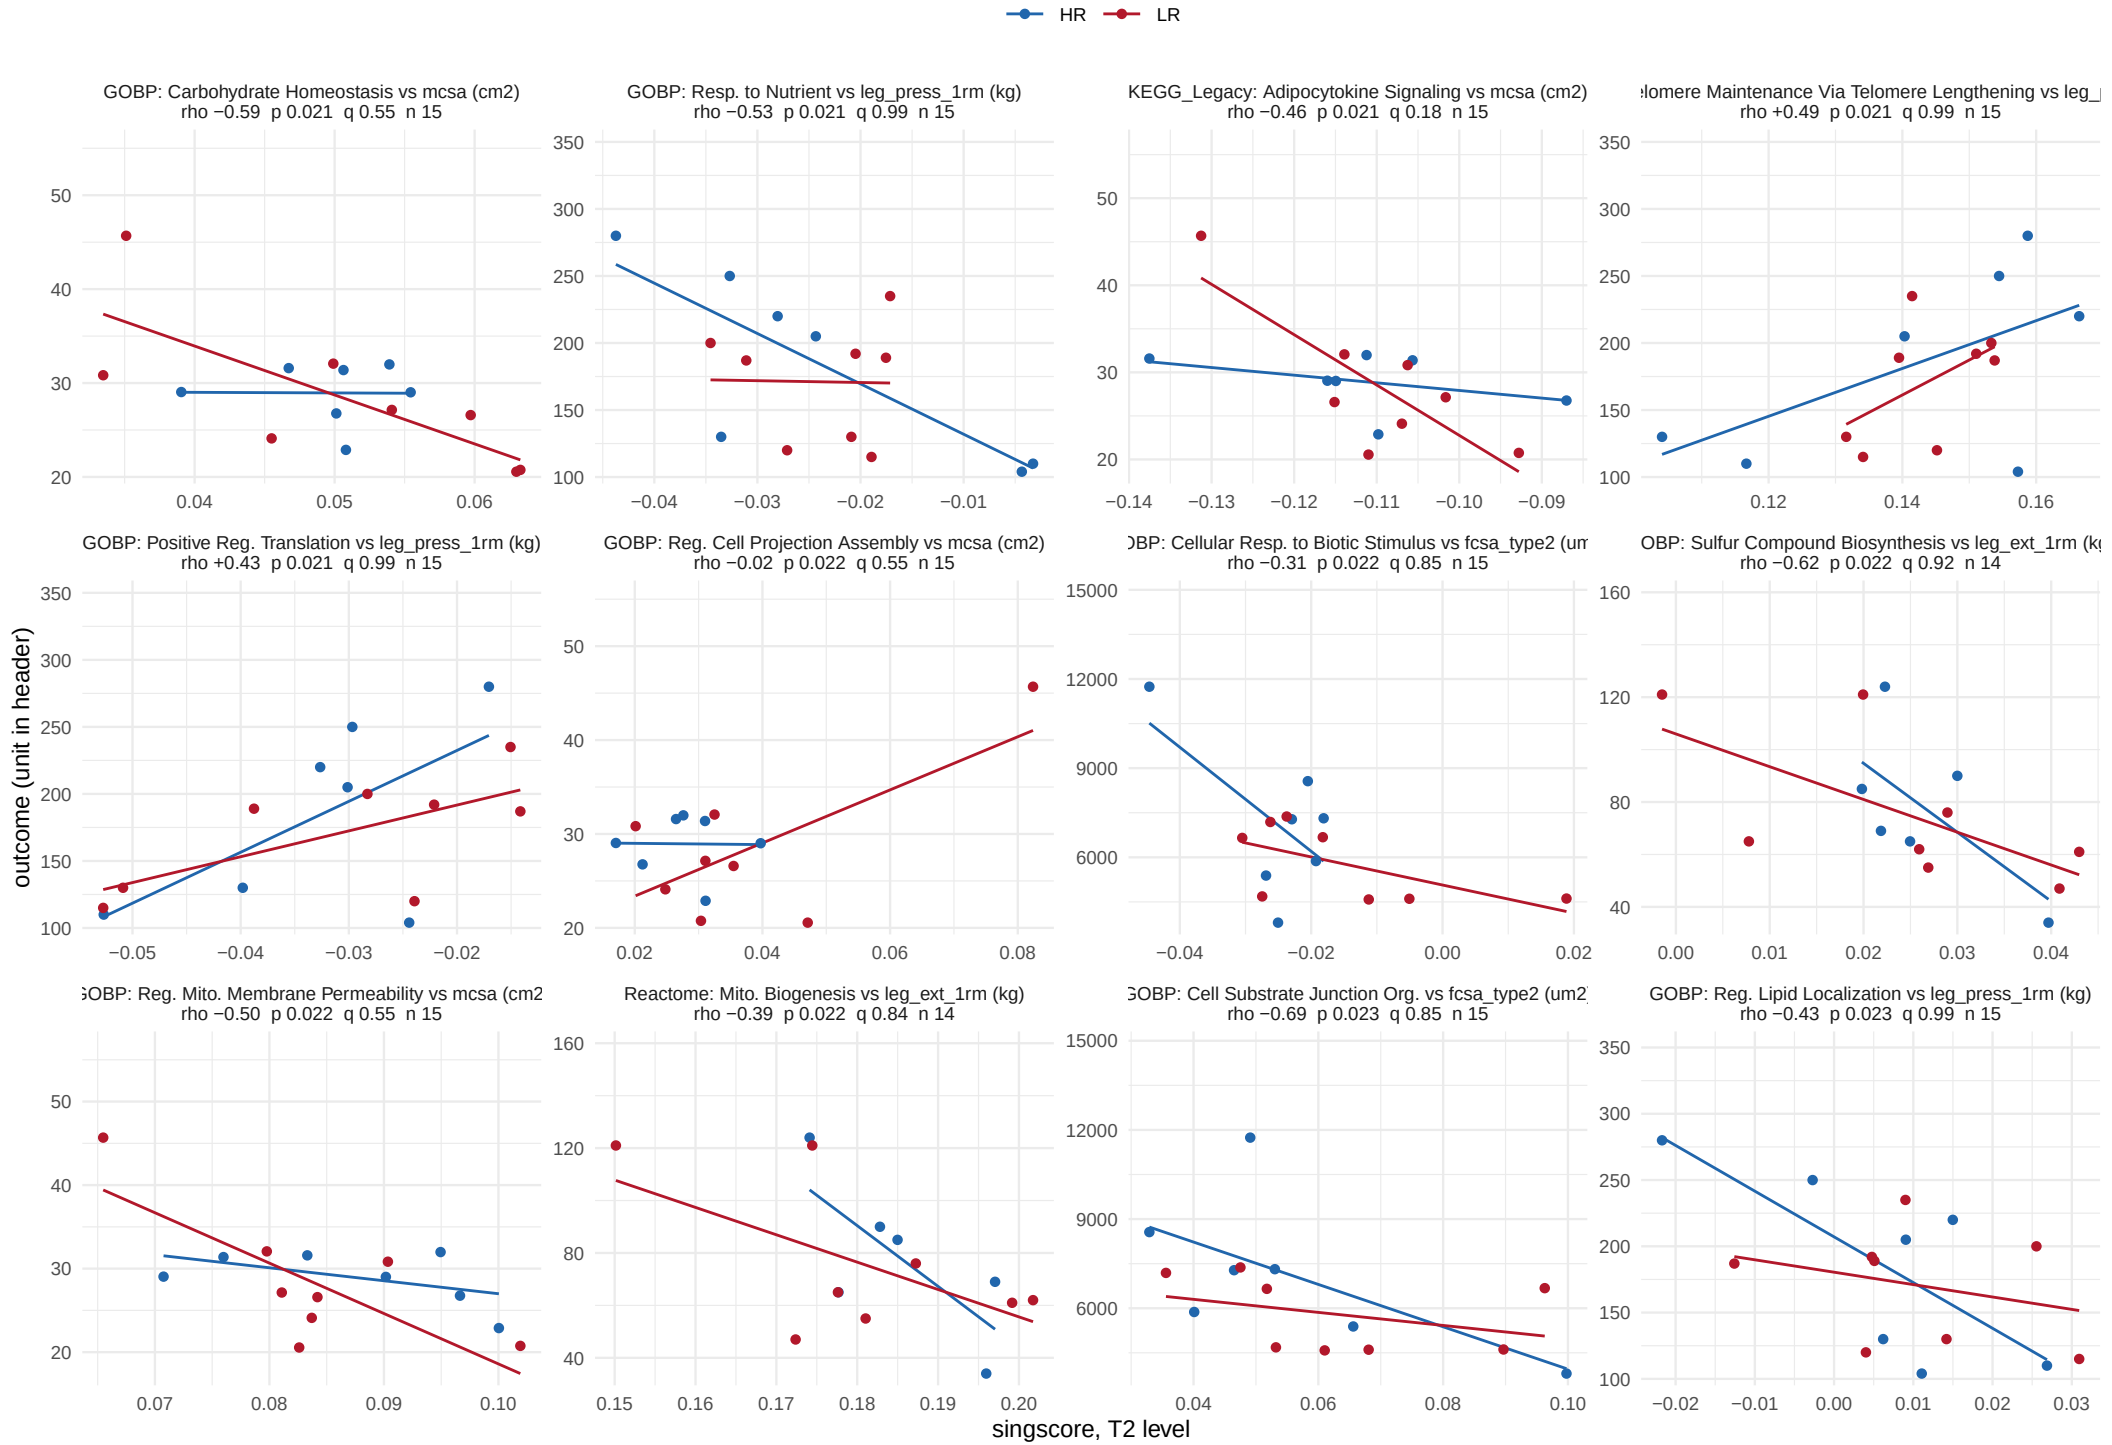

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, post_level window


346 of 8268 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 13 of 29.

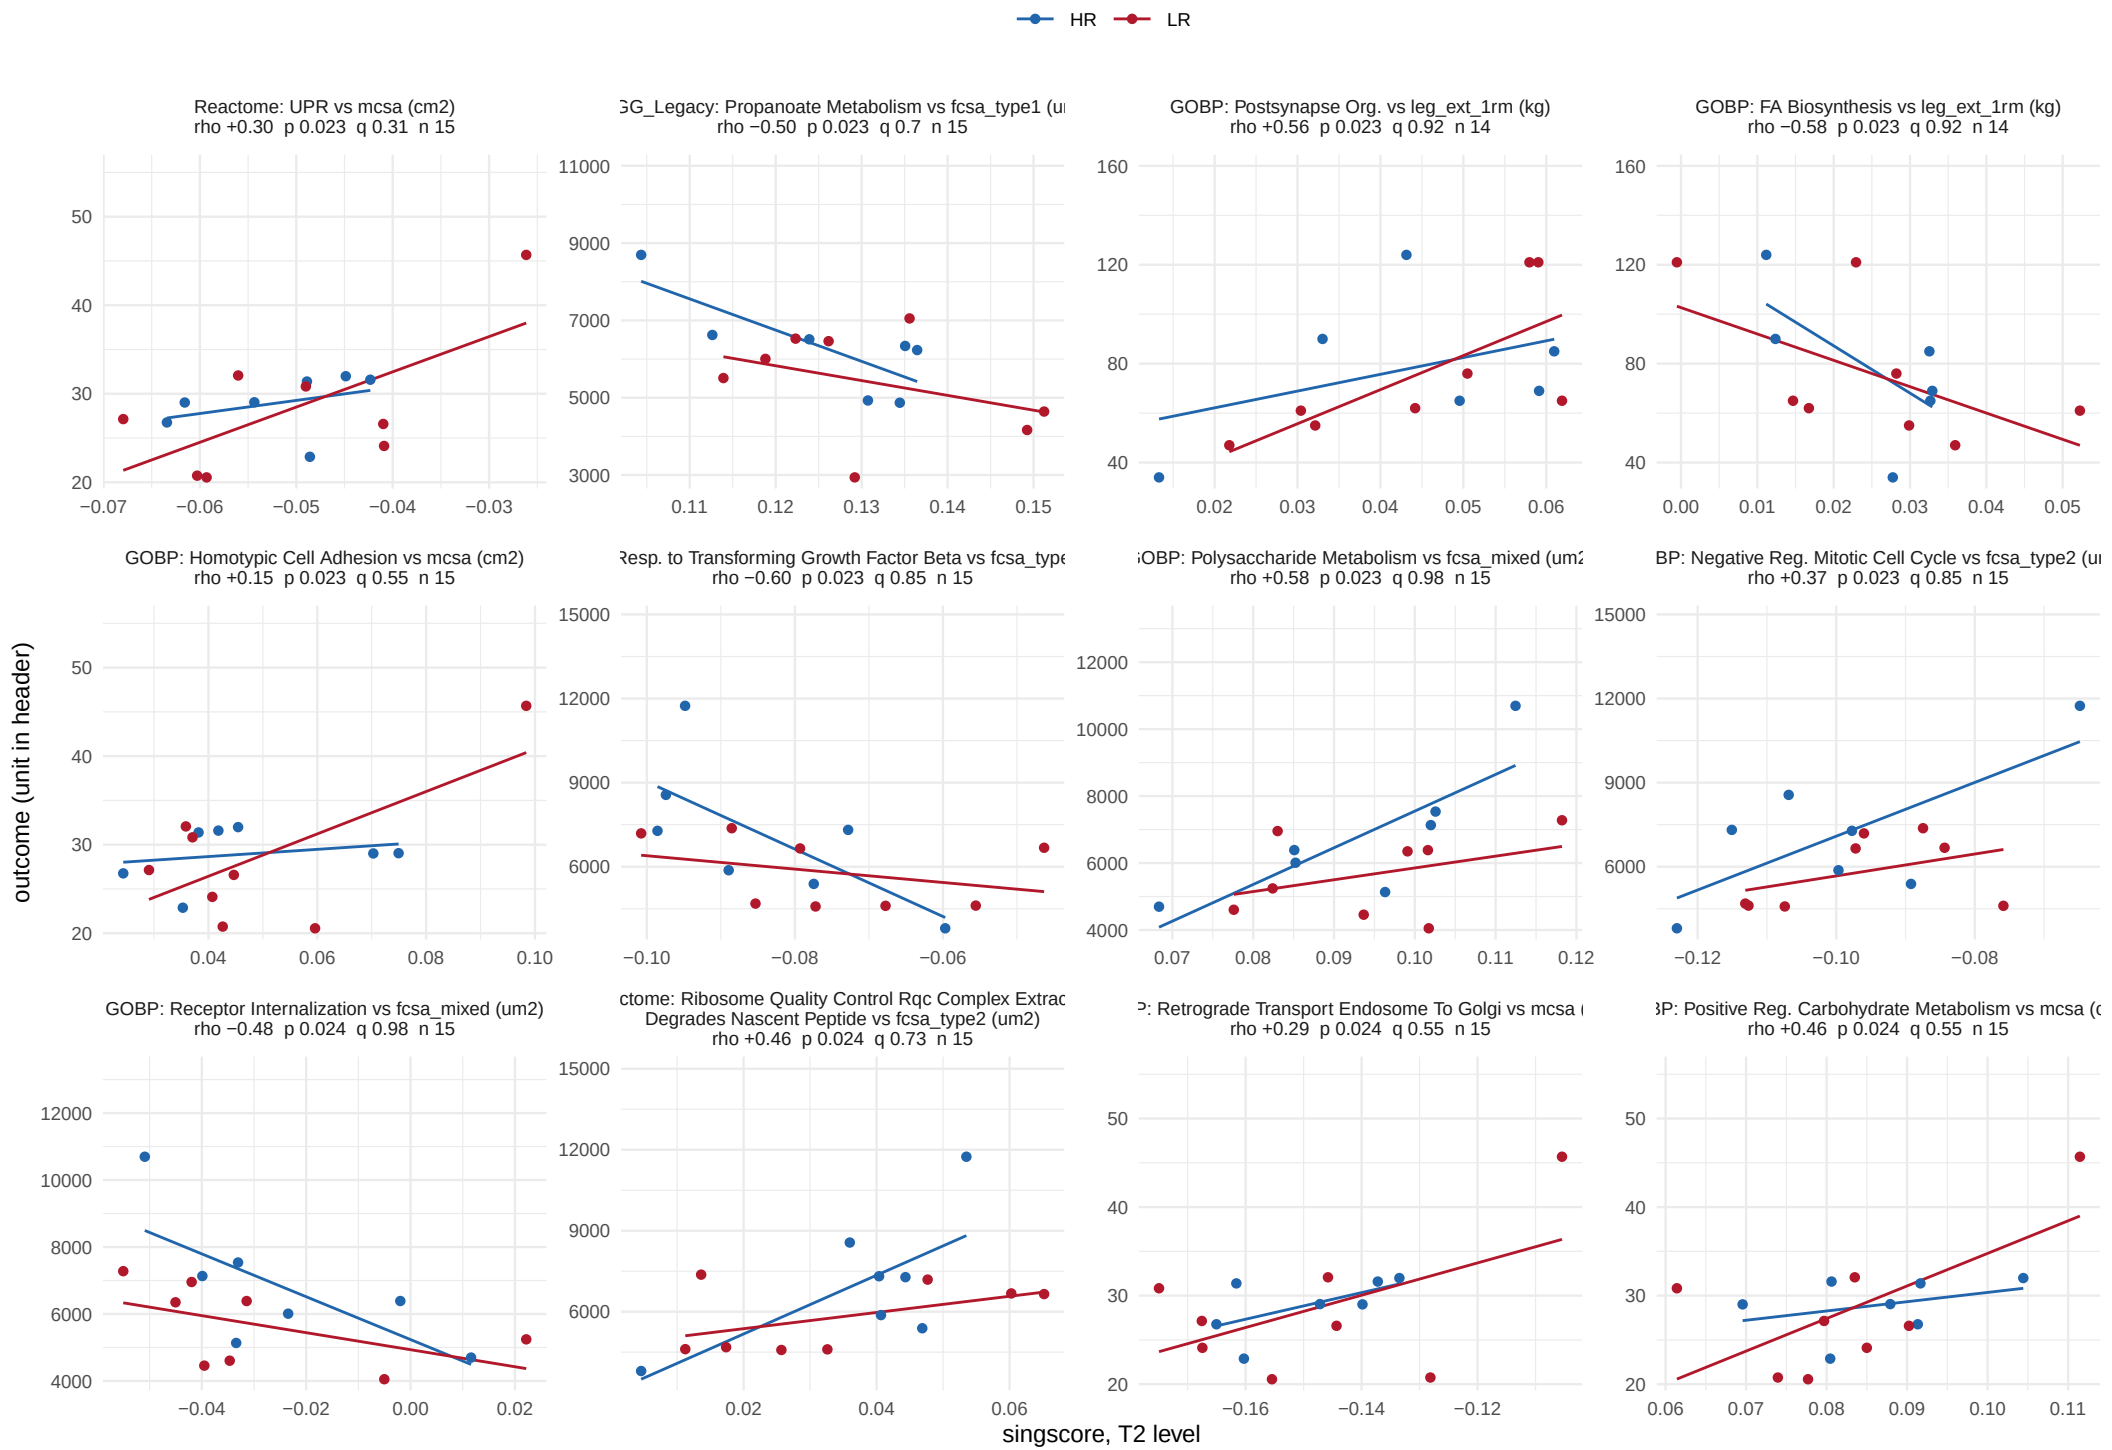

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, post_level window


346 of 8268 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 14 of 29.

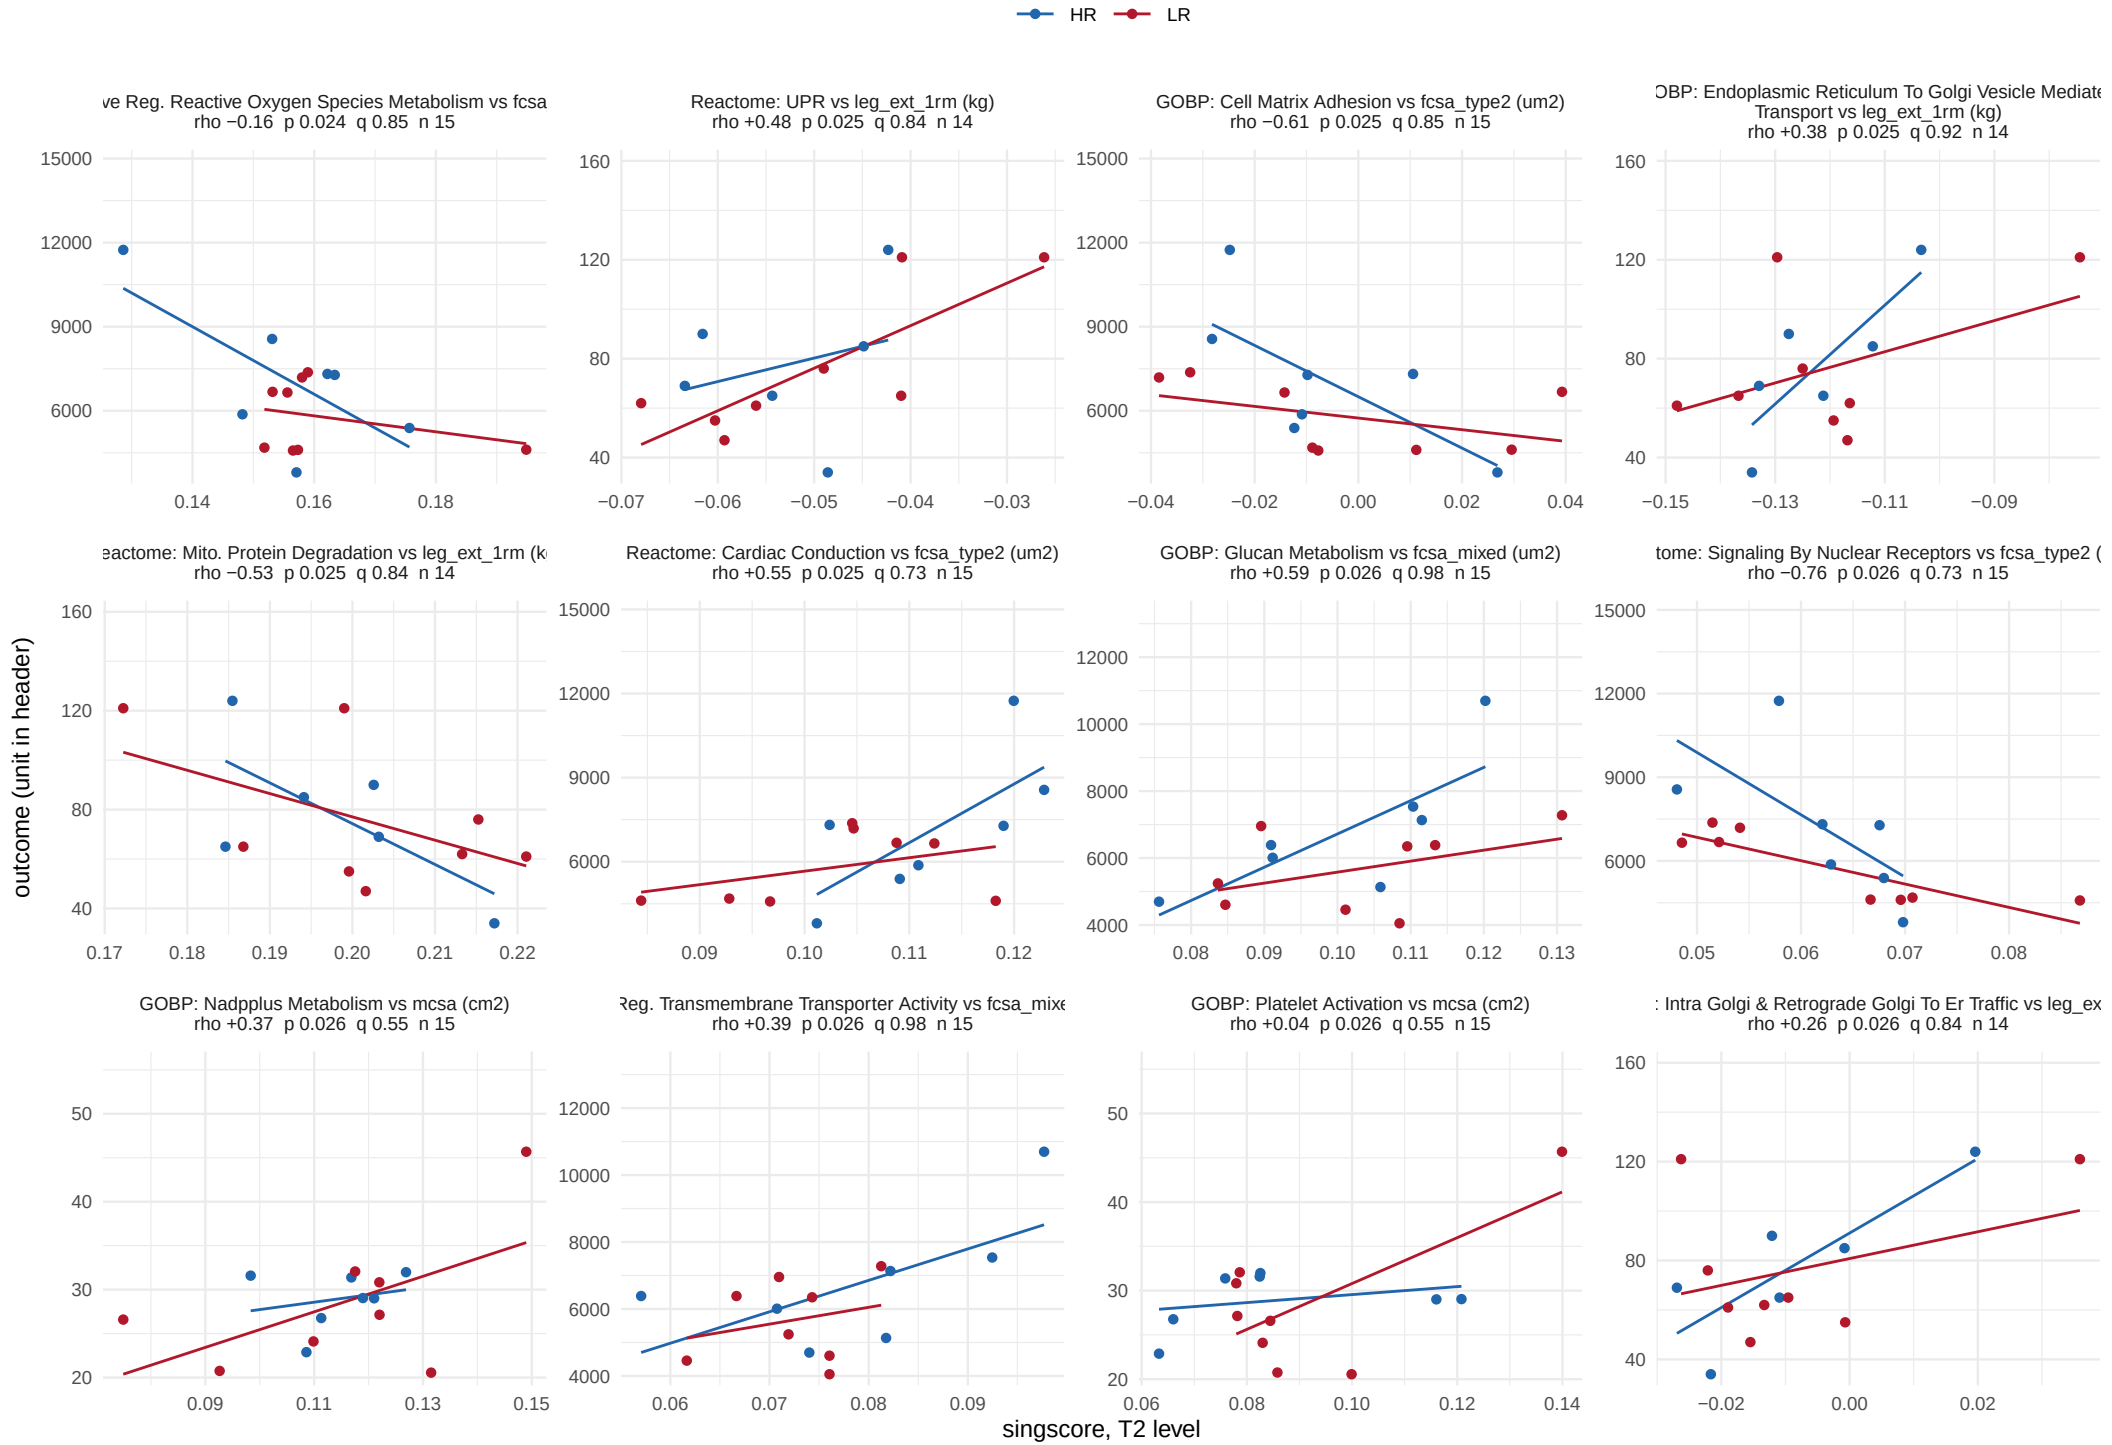

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, post_level window


346 of 8268 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 15 of 29.

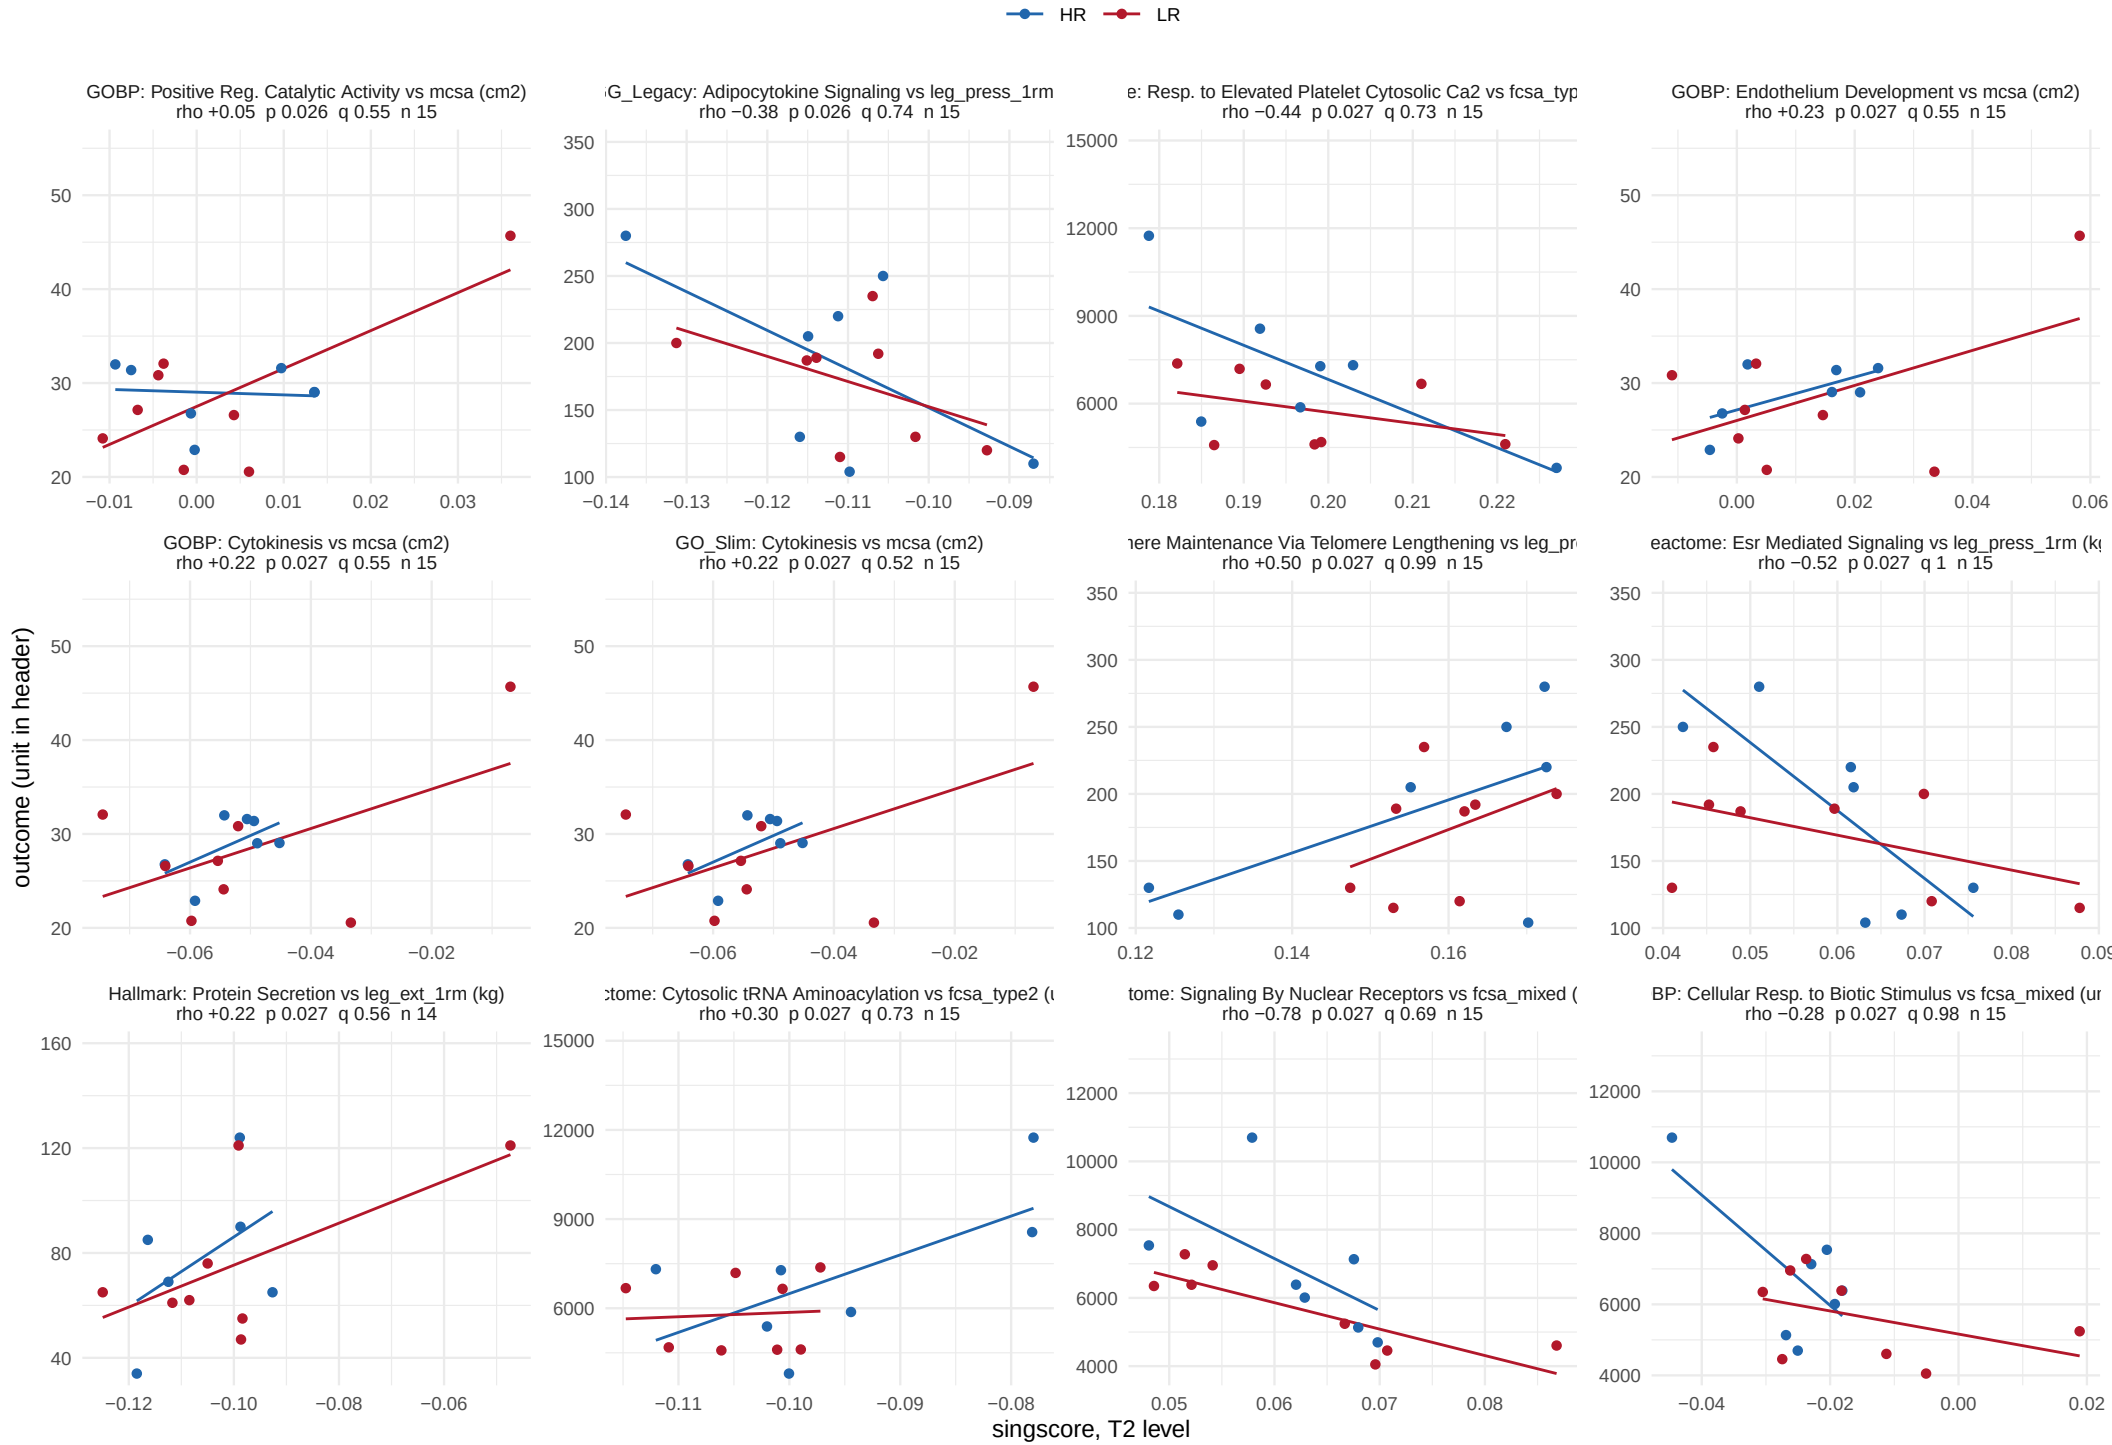

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, post_level window


346 of 8268 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 16 of 29.

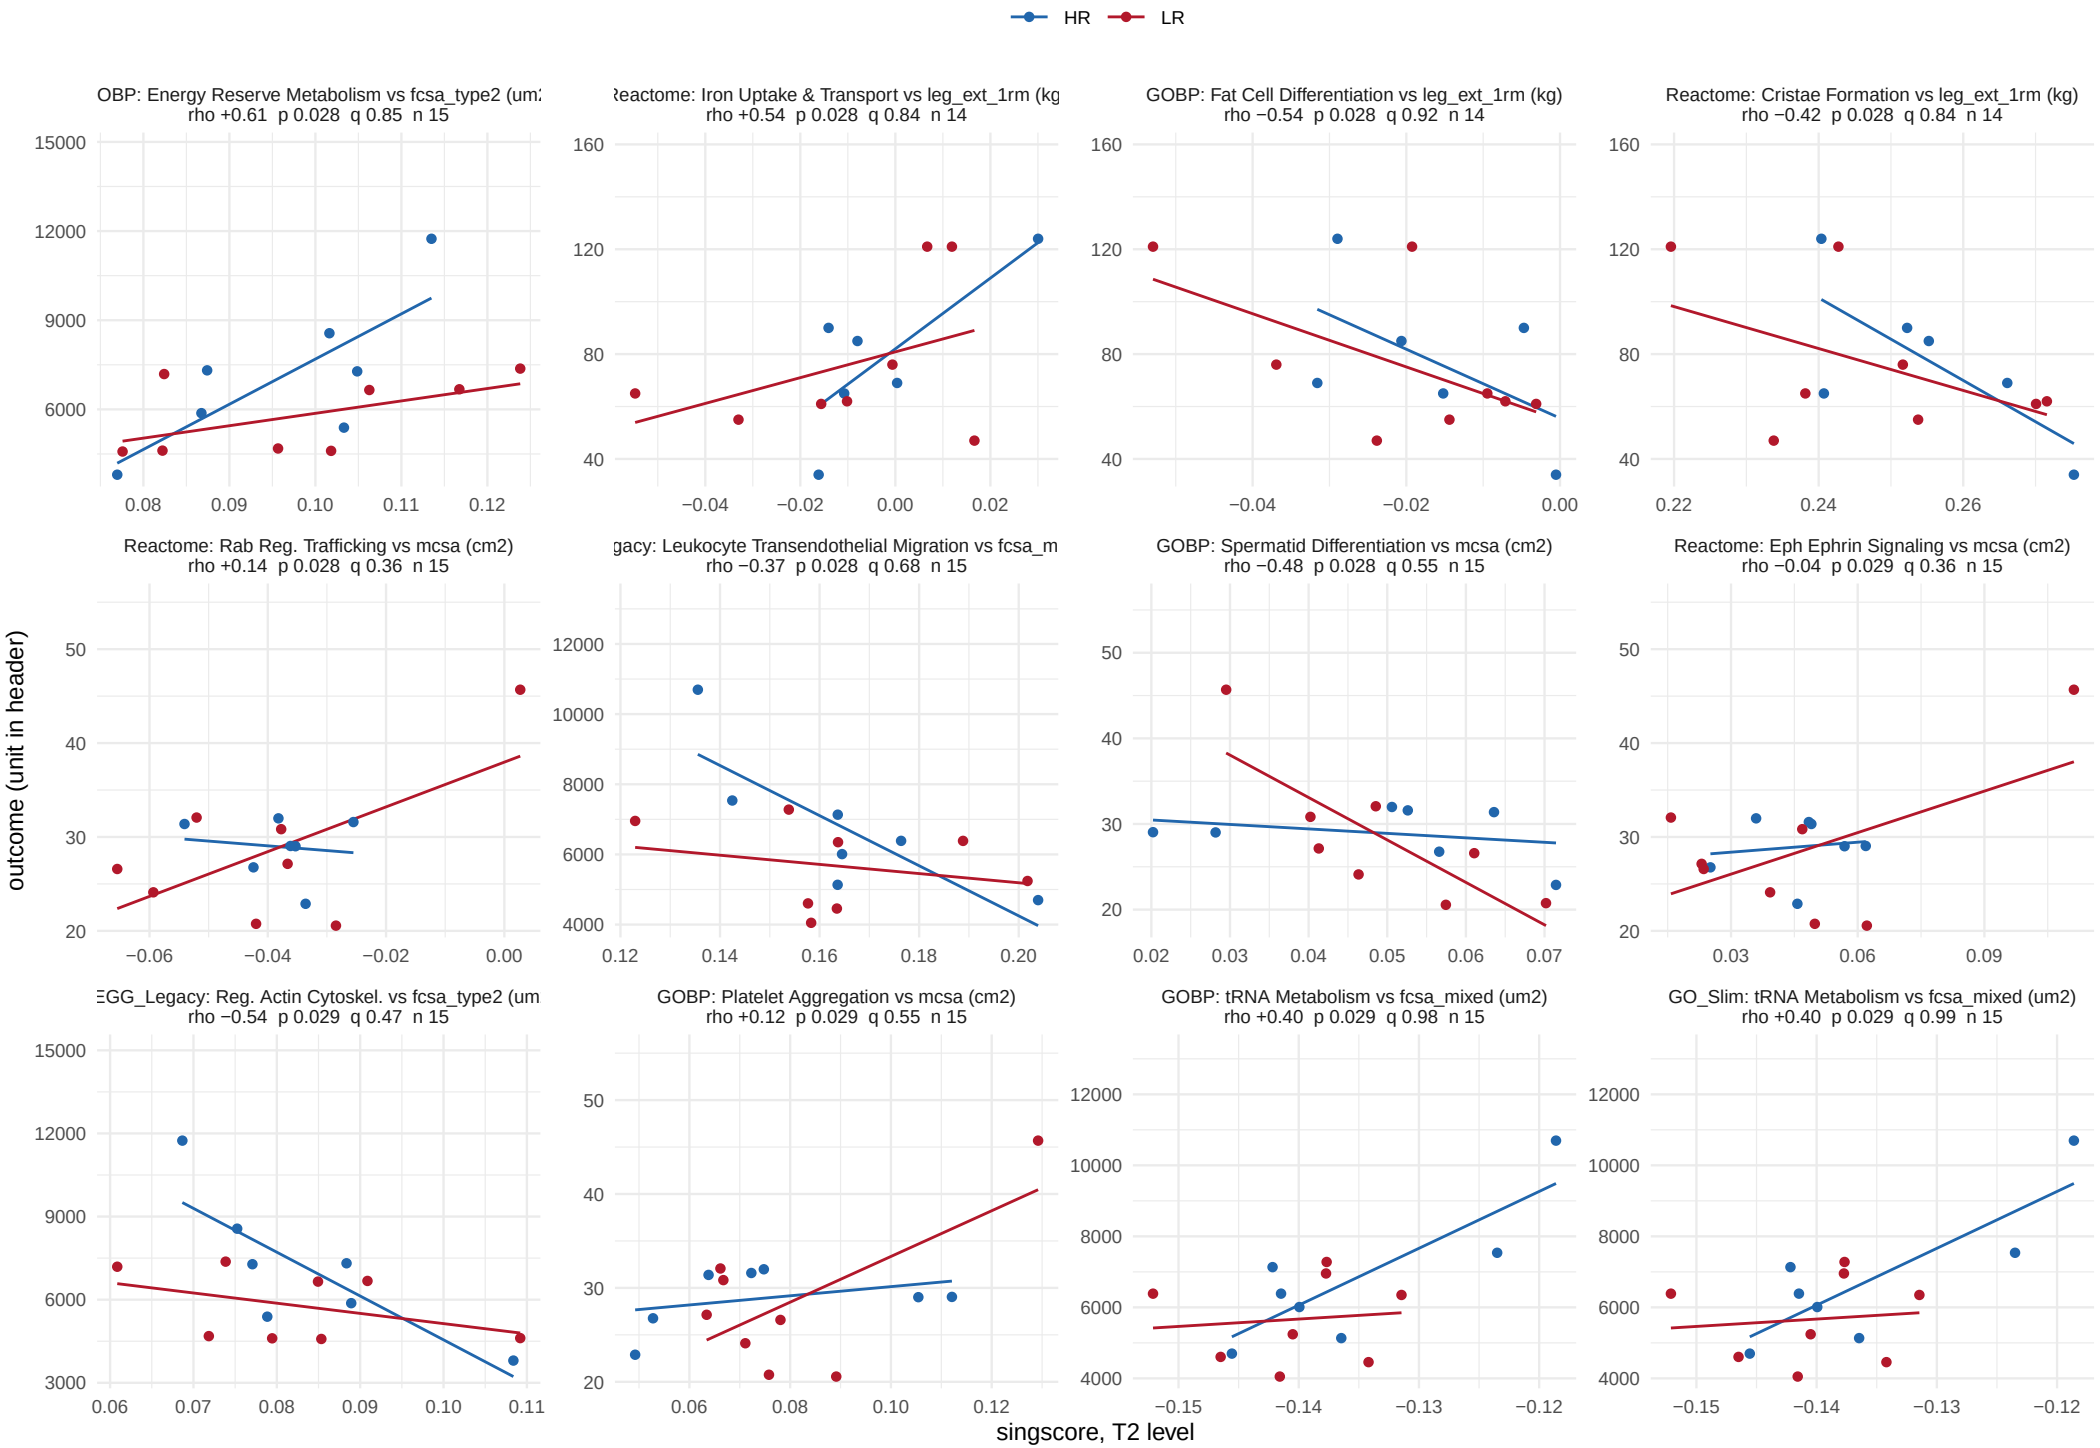

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, post_level window


346 of 8268 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 17 of 29.

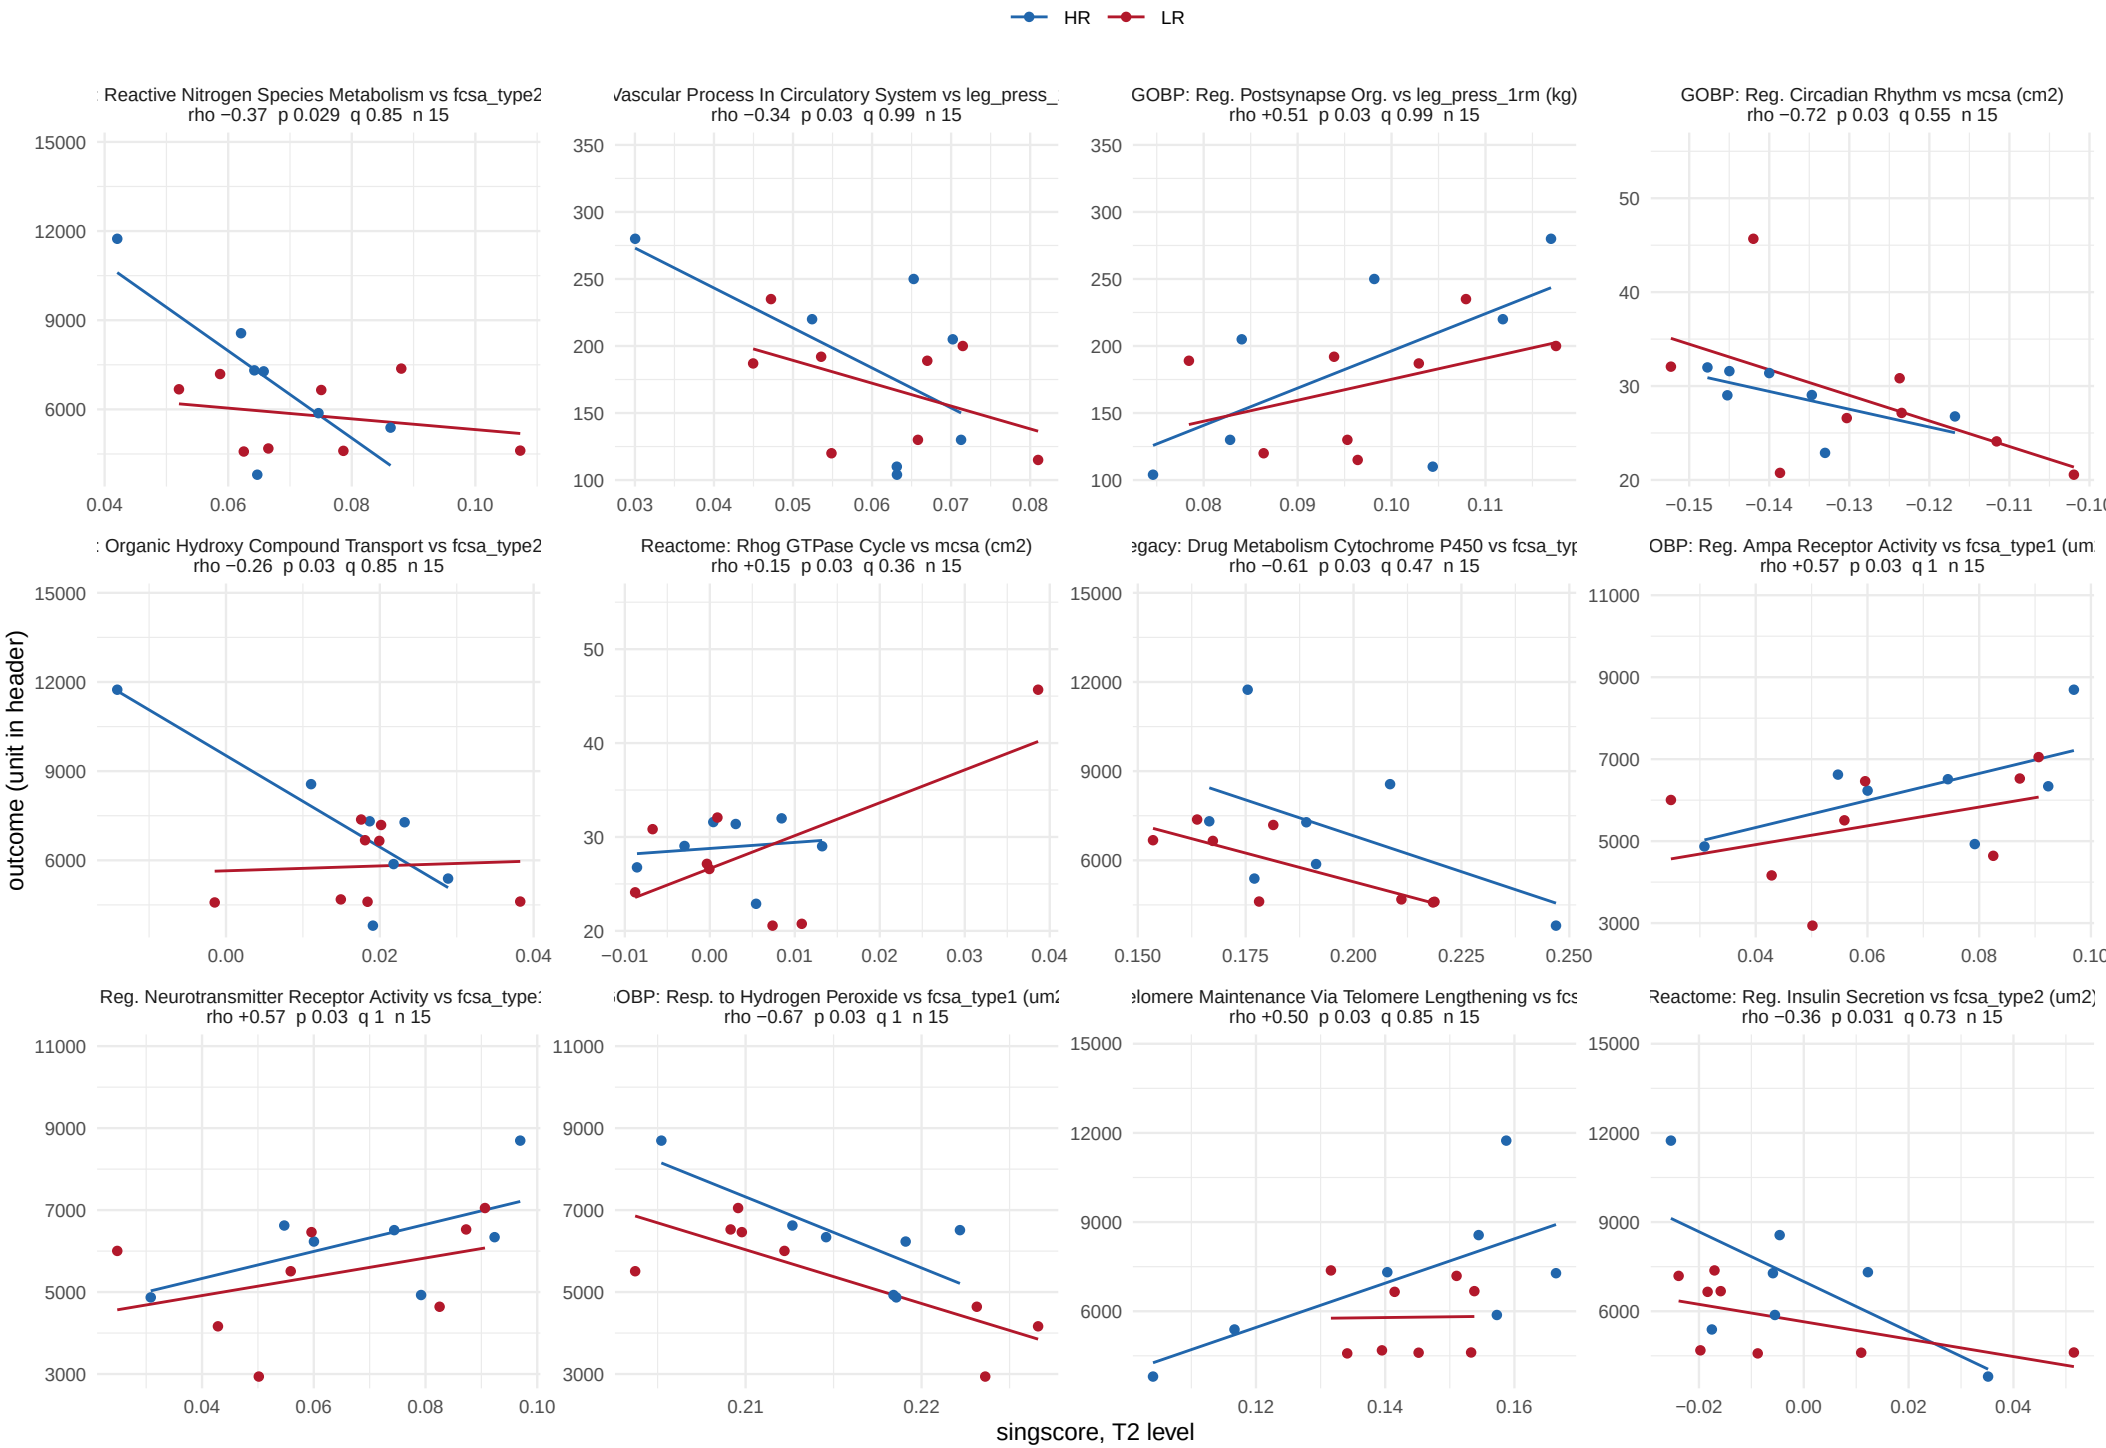

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, post_level window


346 of 8268 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 18 of 29.

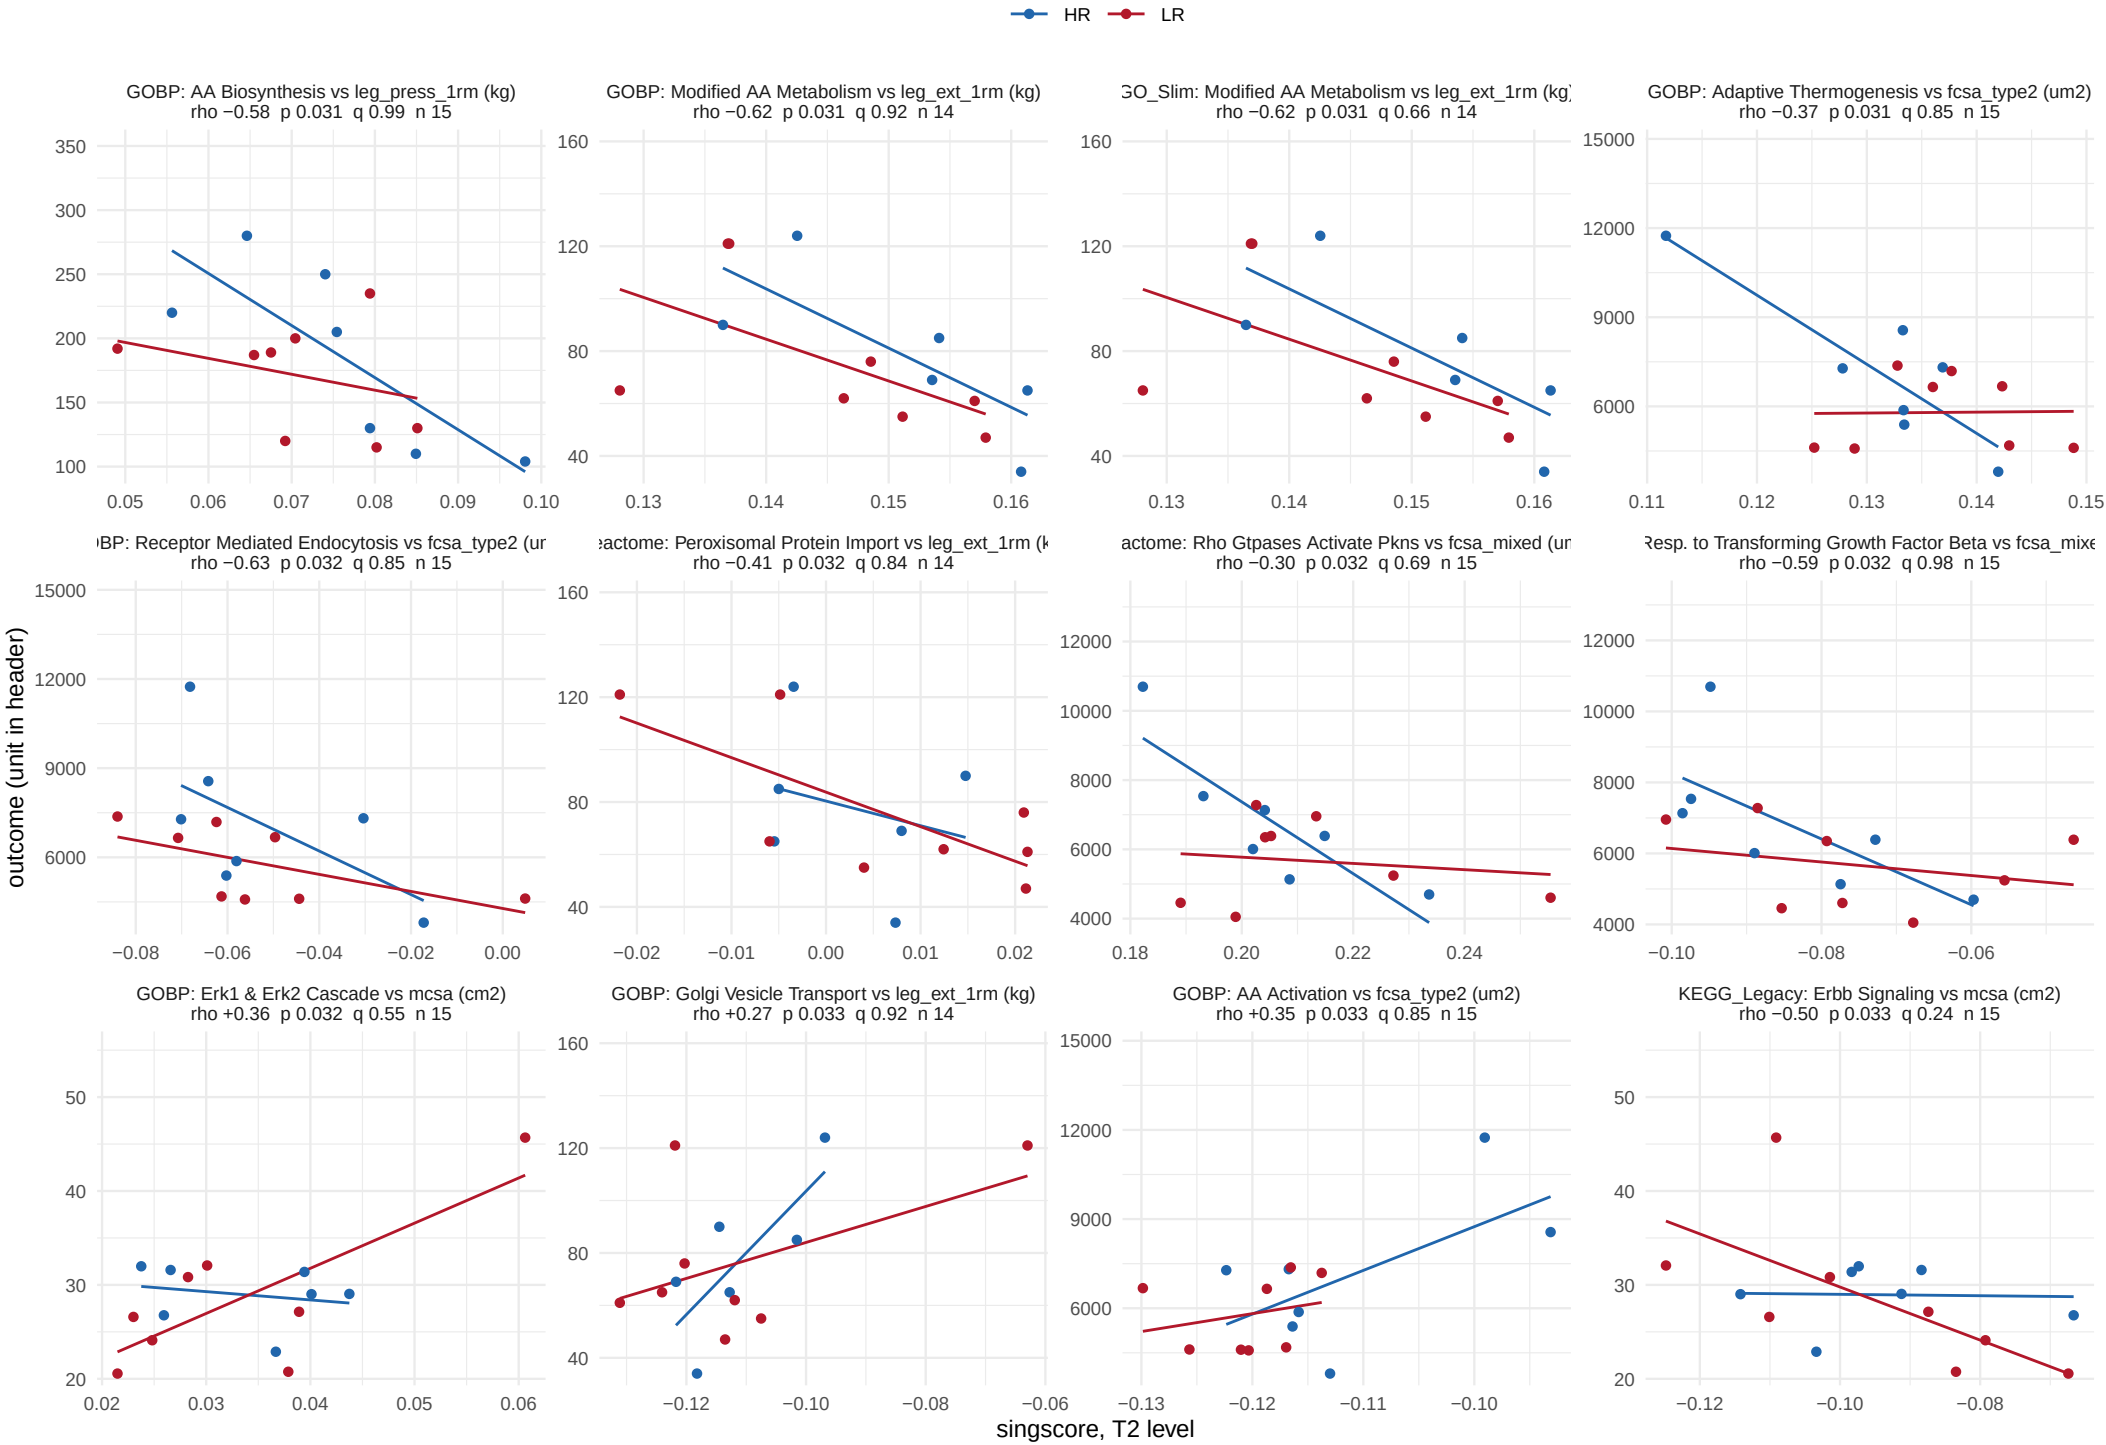

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, post_level window


346 of 8268 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 19 of 29.

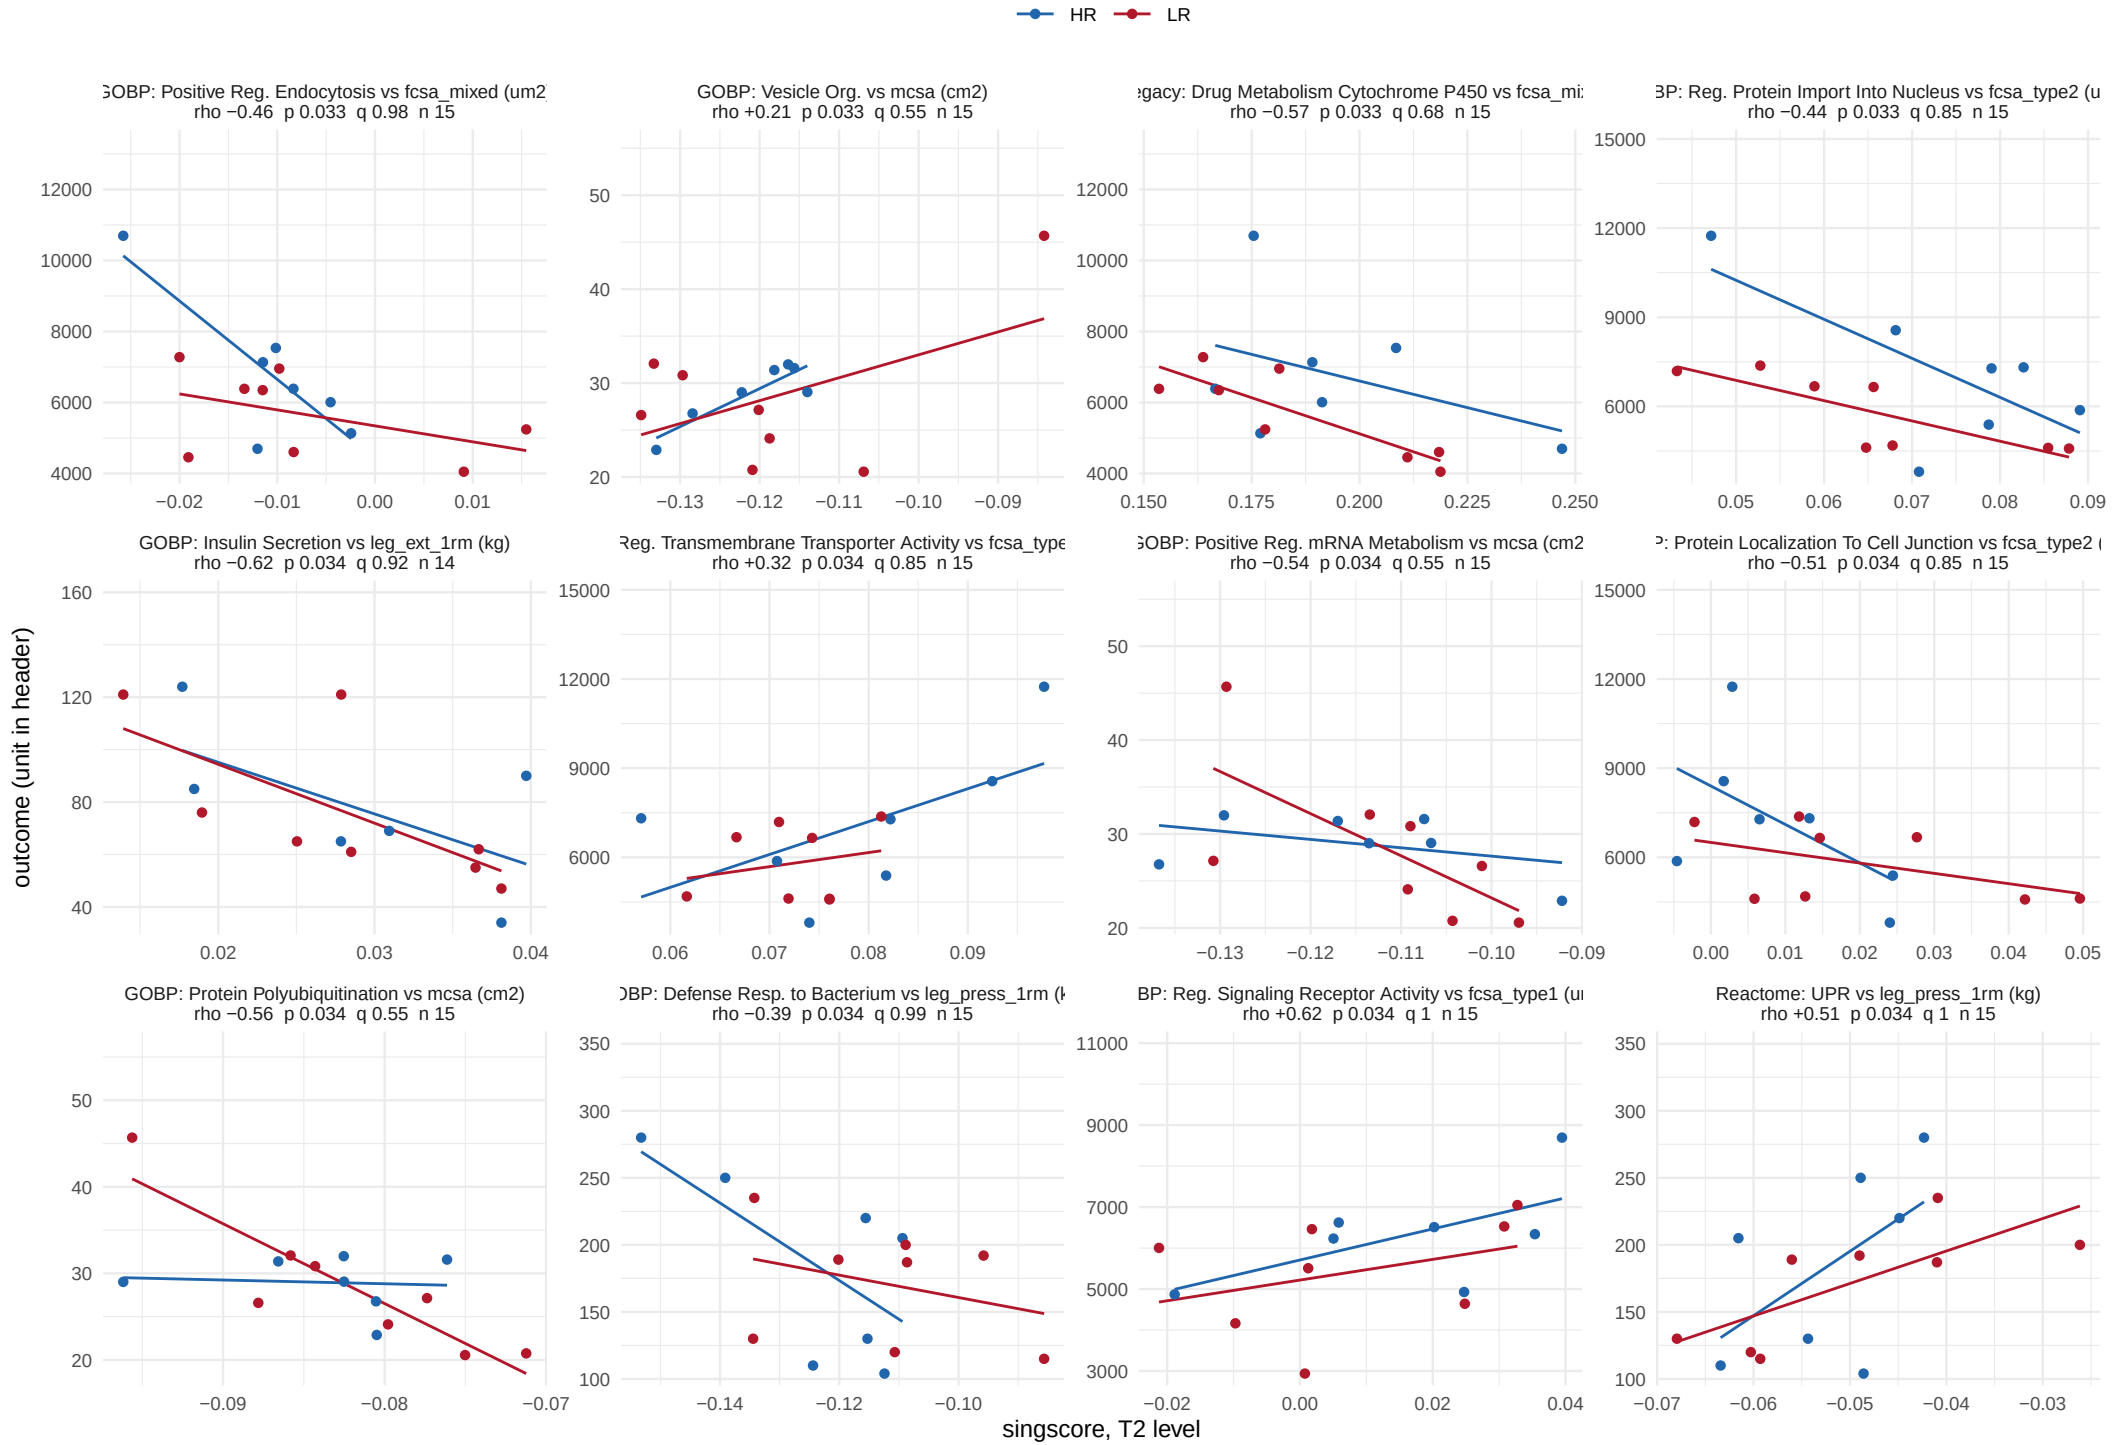

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, post_level window


346 of 8268 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 20 of 29.

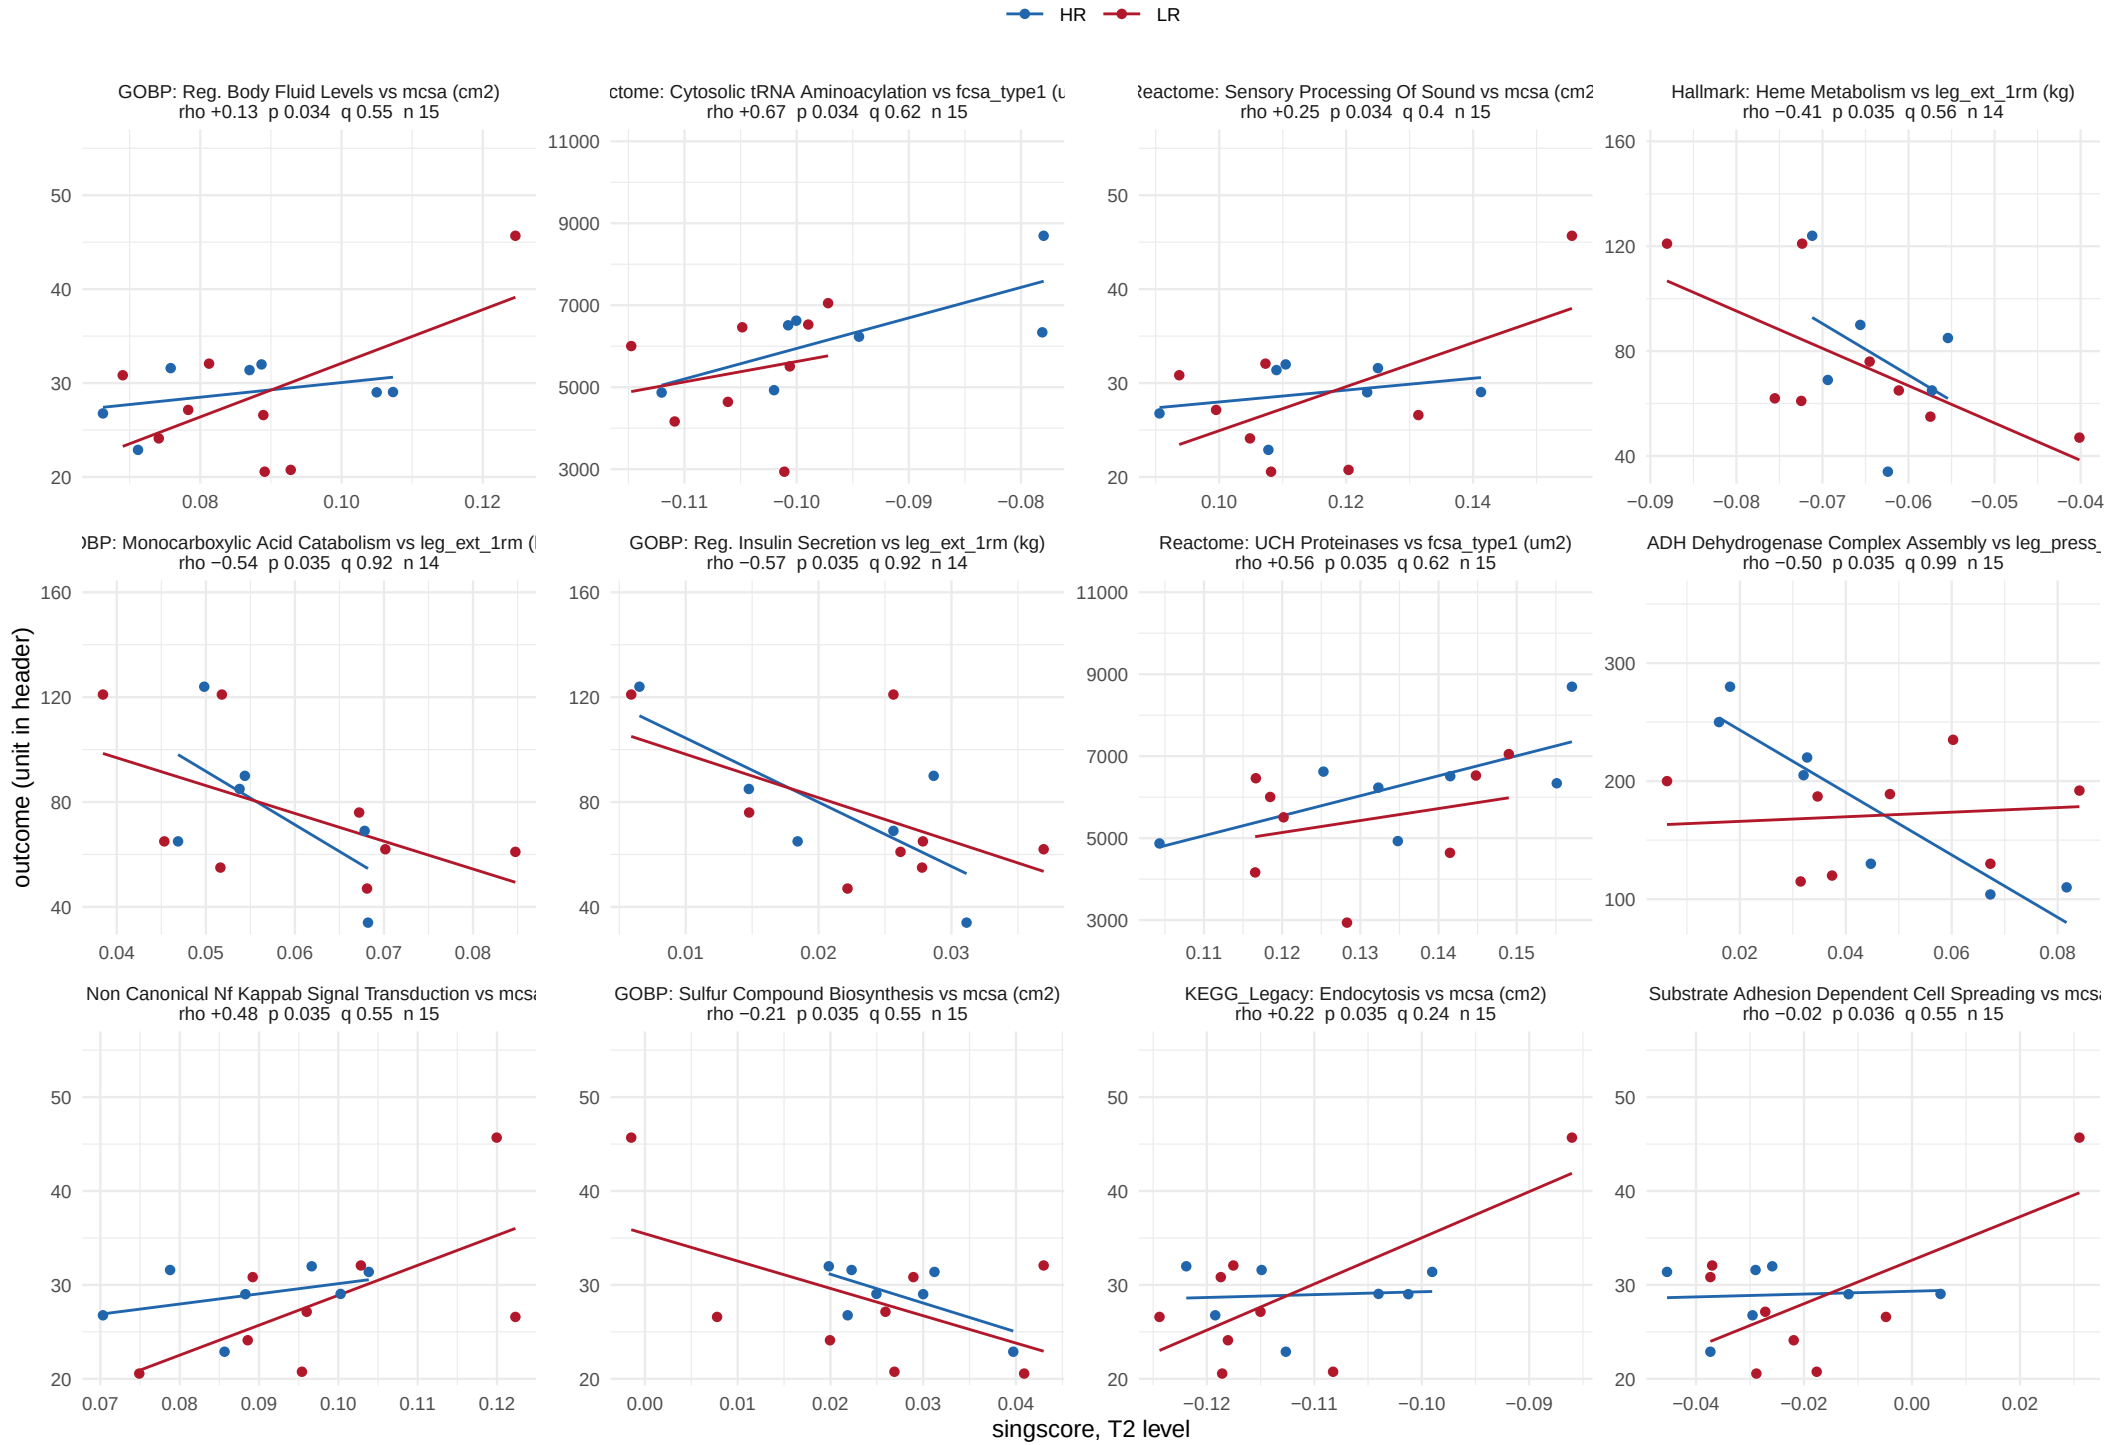

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, post_level window


346 of 8268 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 21 of 29.

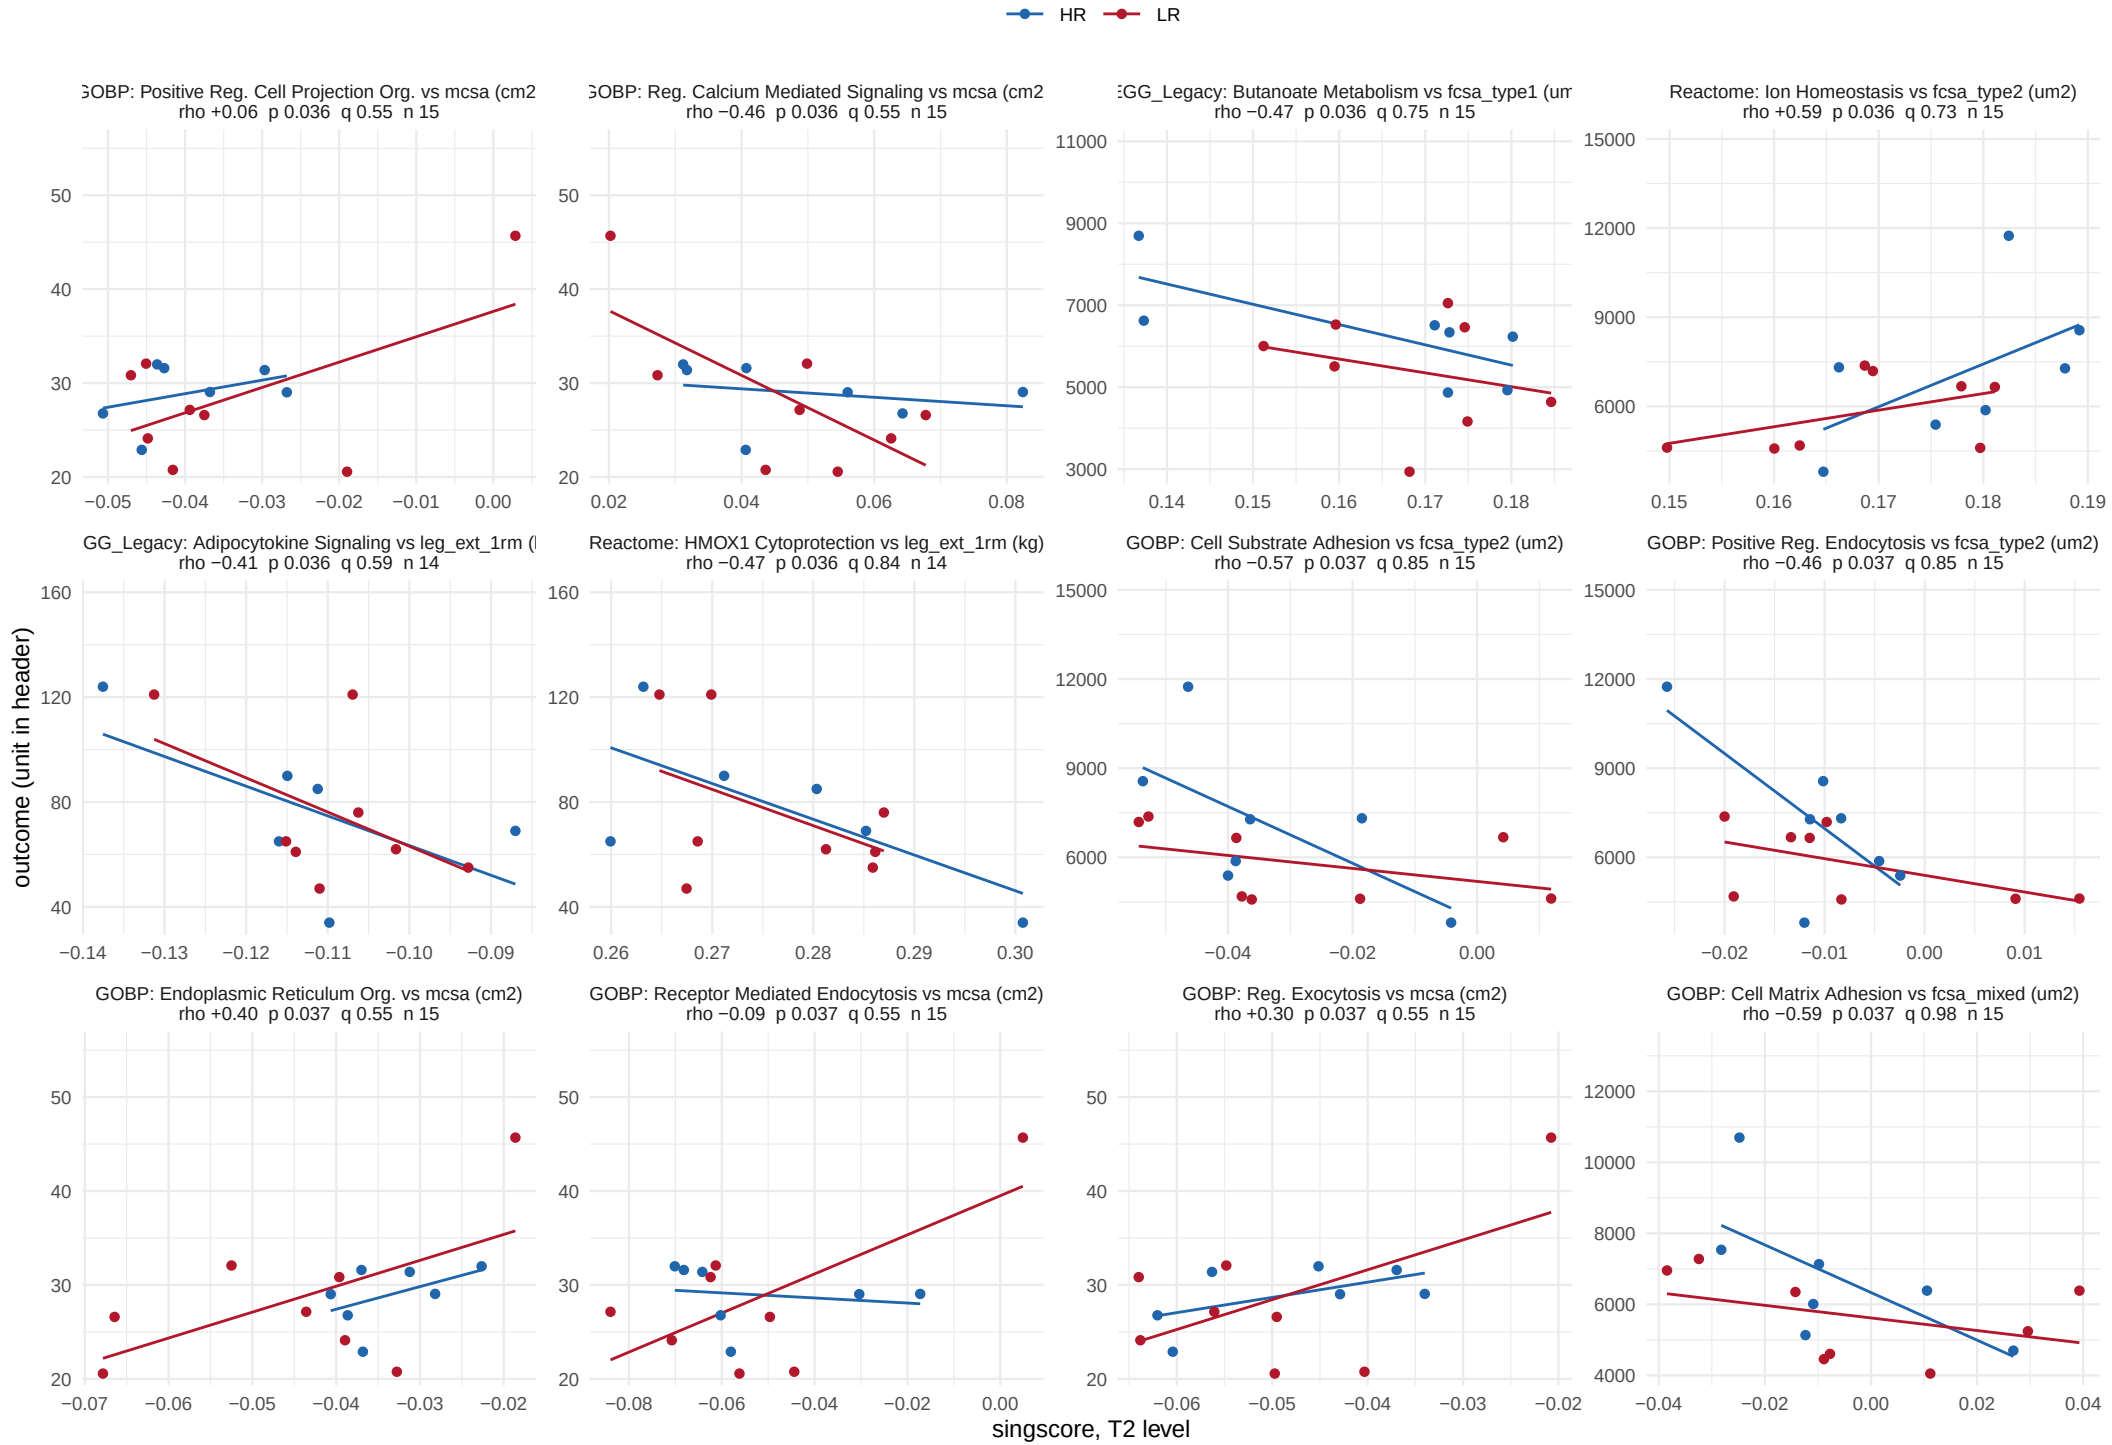

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, post_level window


346 of 8268 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 22 of 29.

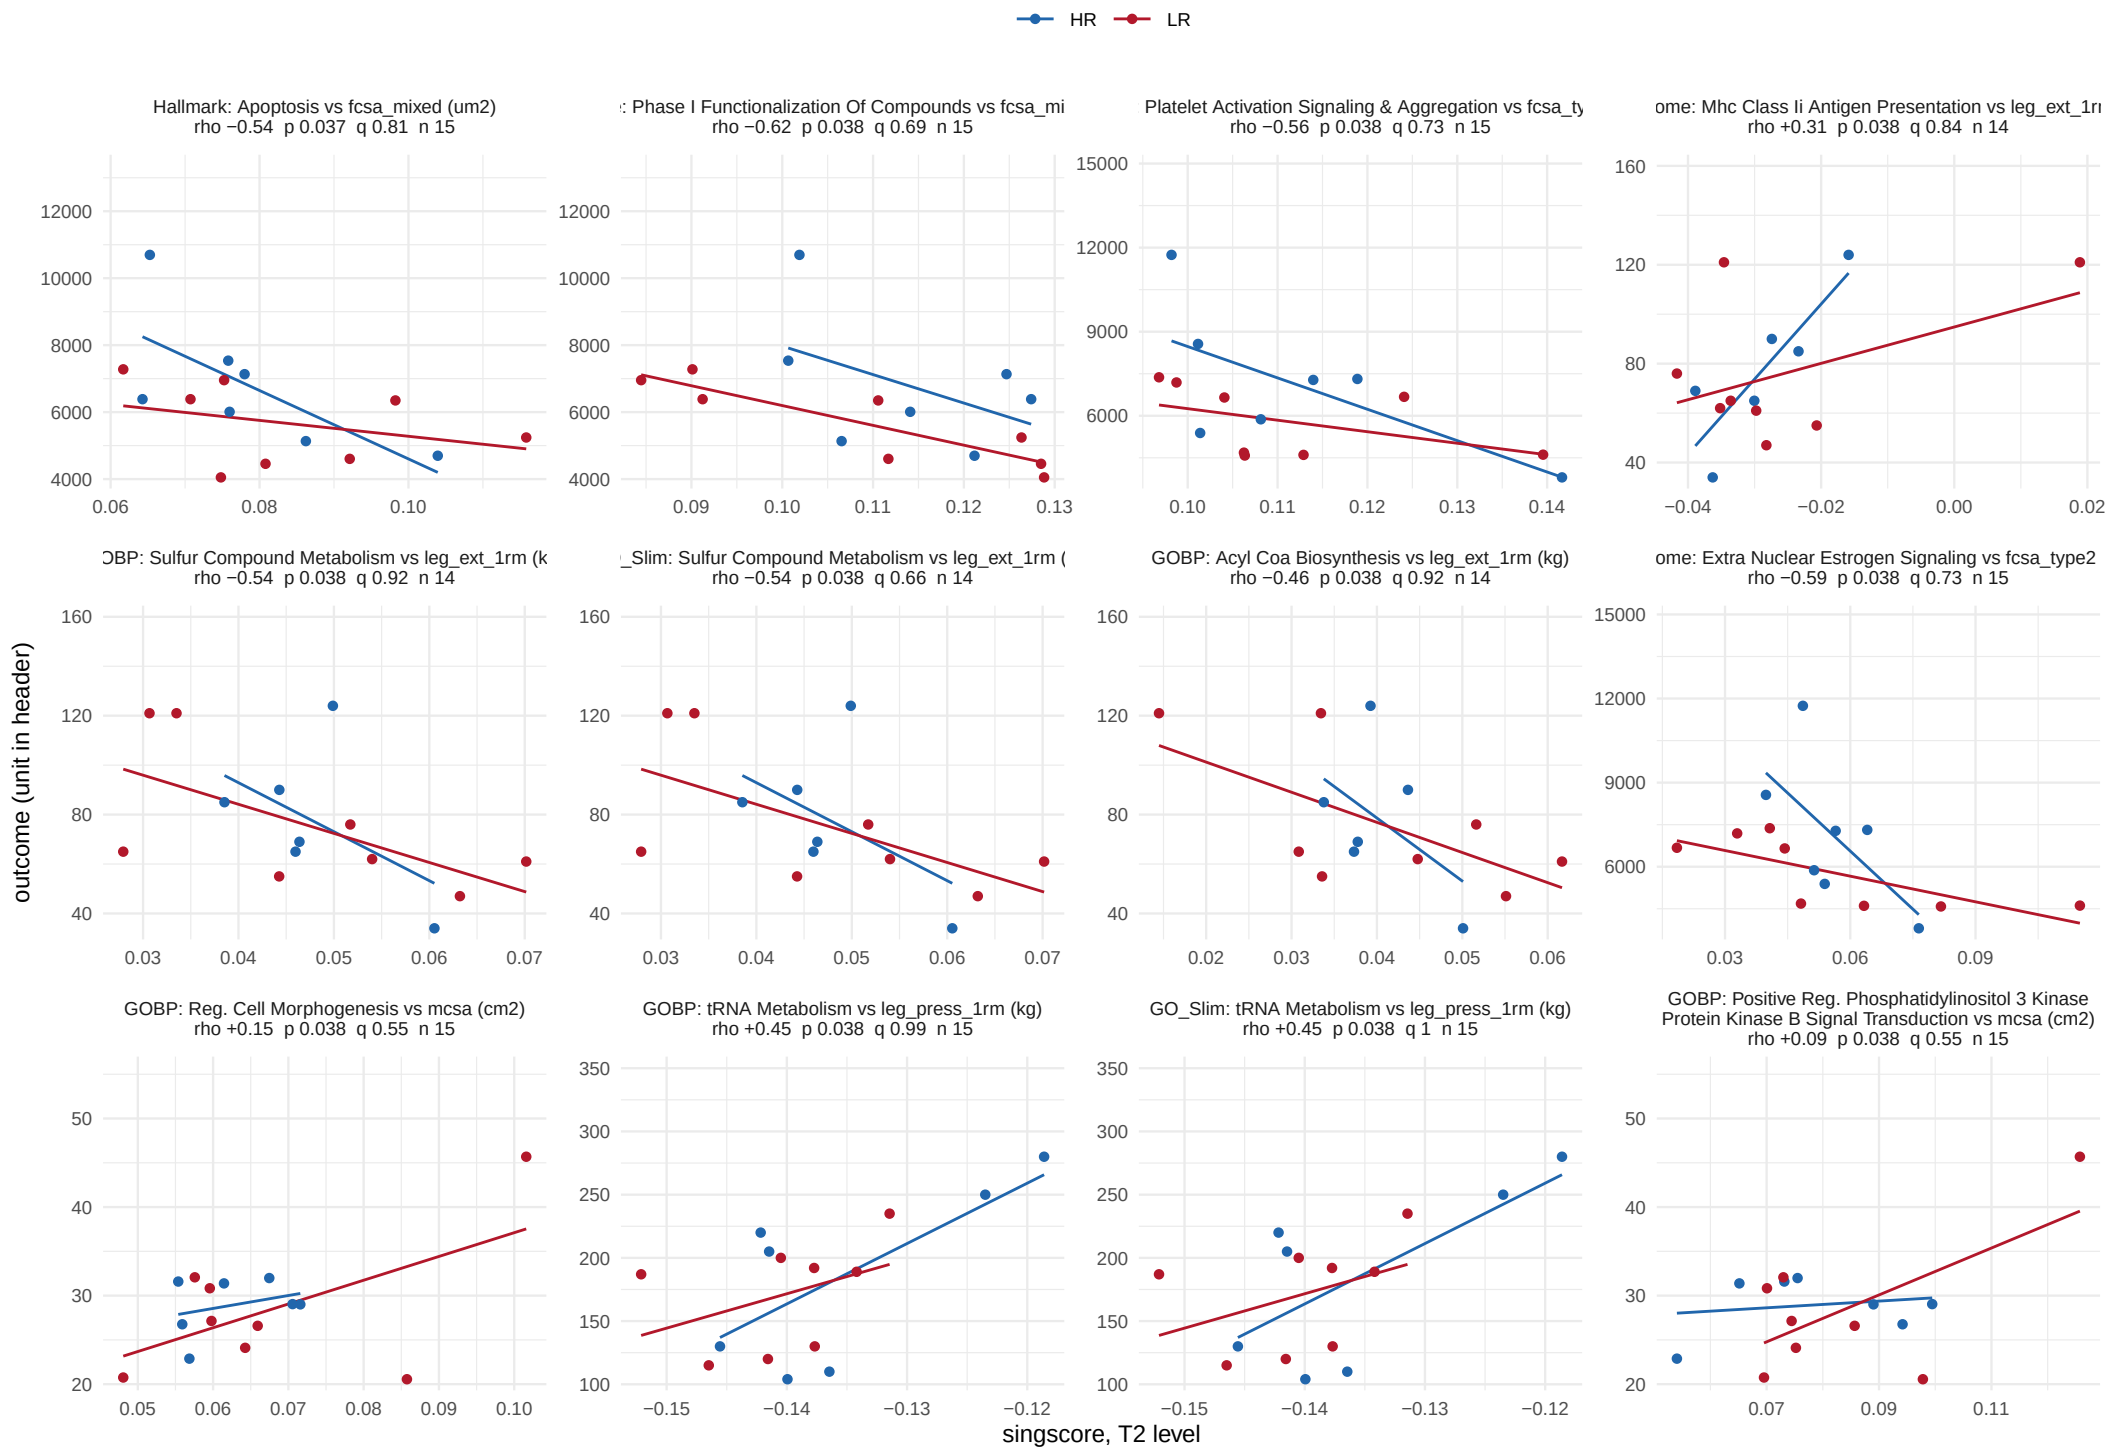

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, post_level window


346 of 8268 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 23 of 29.

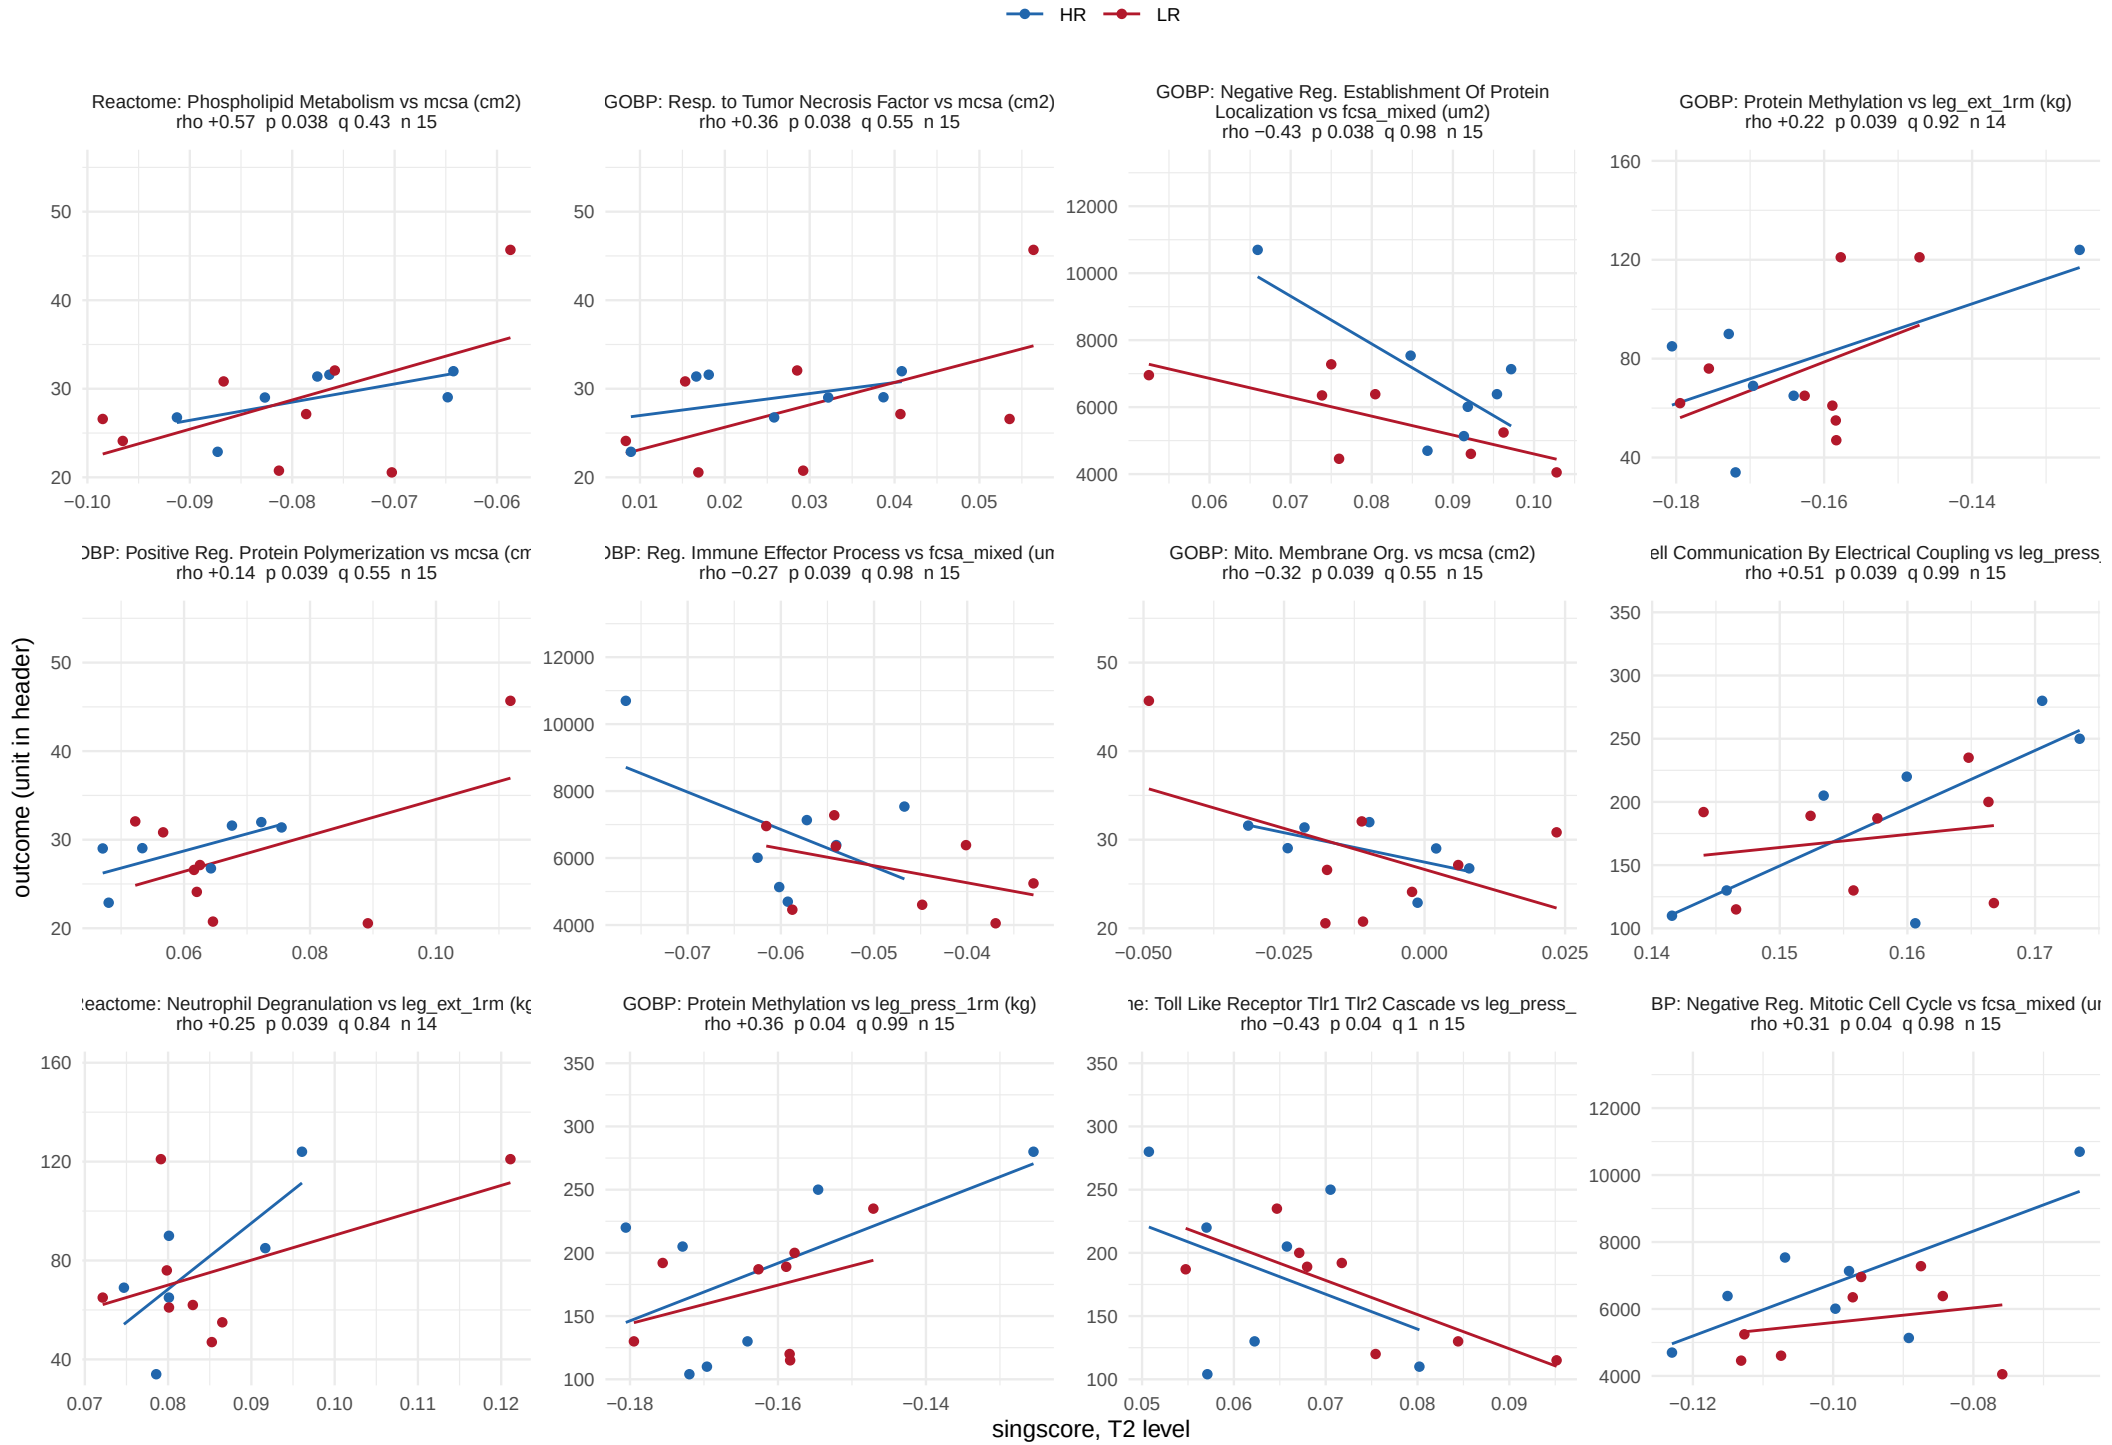

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, post_level window


346 of 8268 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 24 of 29.

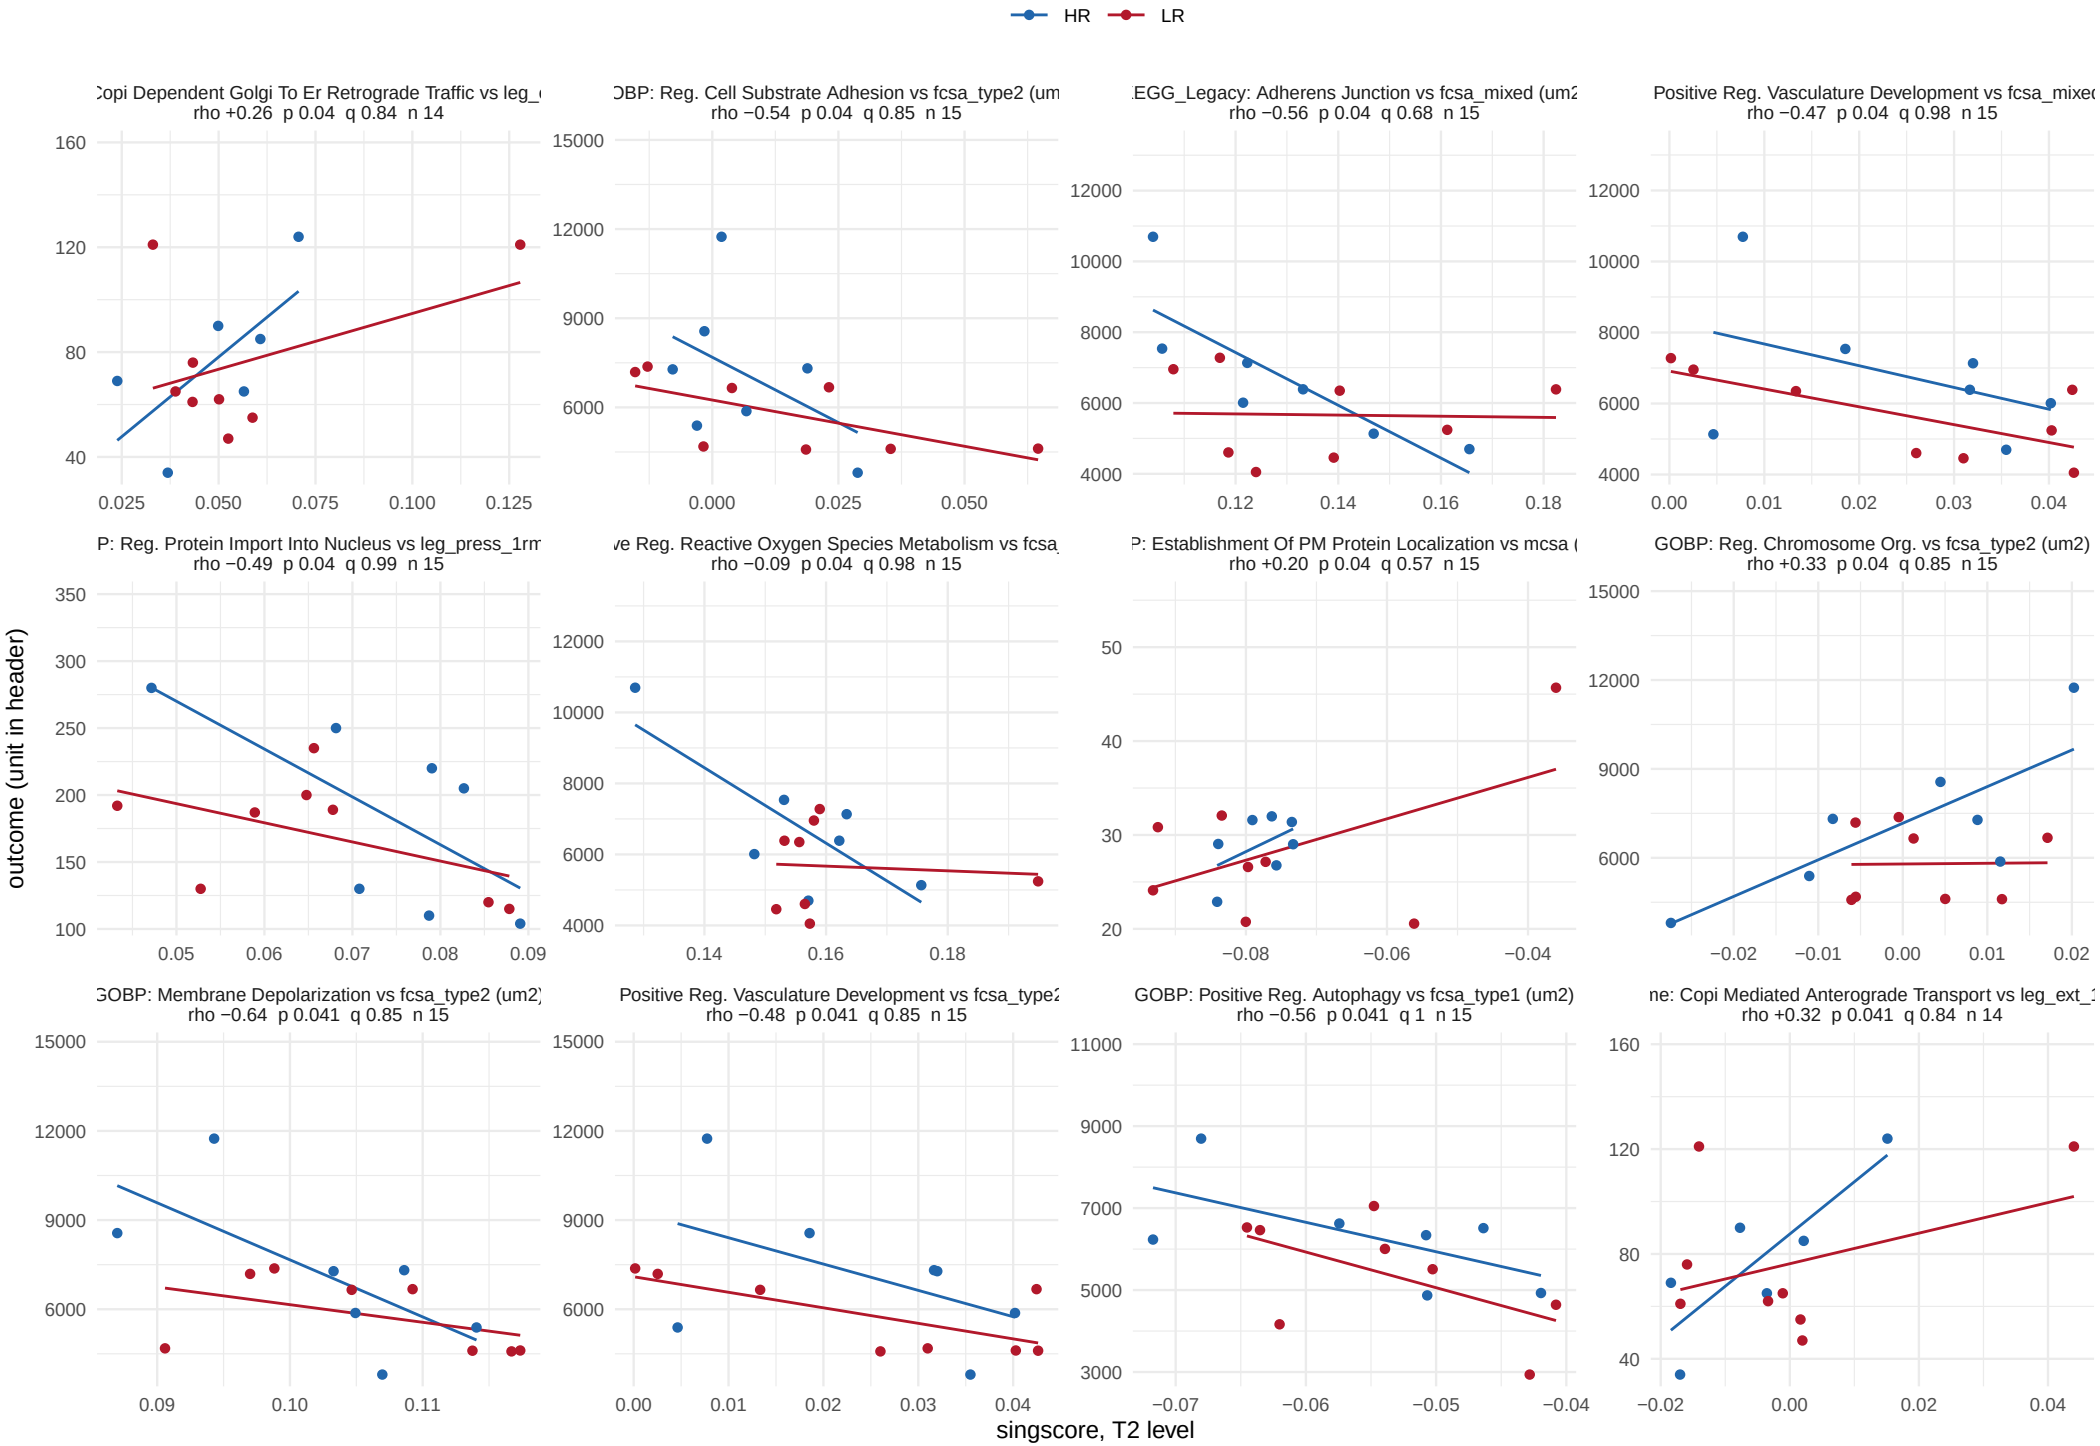

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, post_level window


346 of 8268 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 25 of 29.

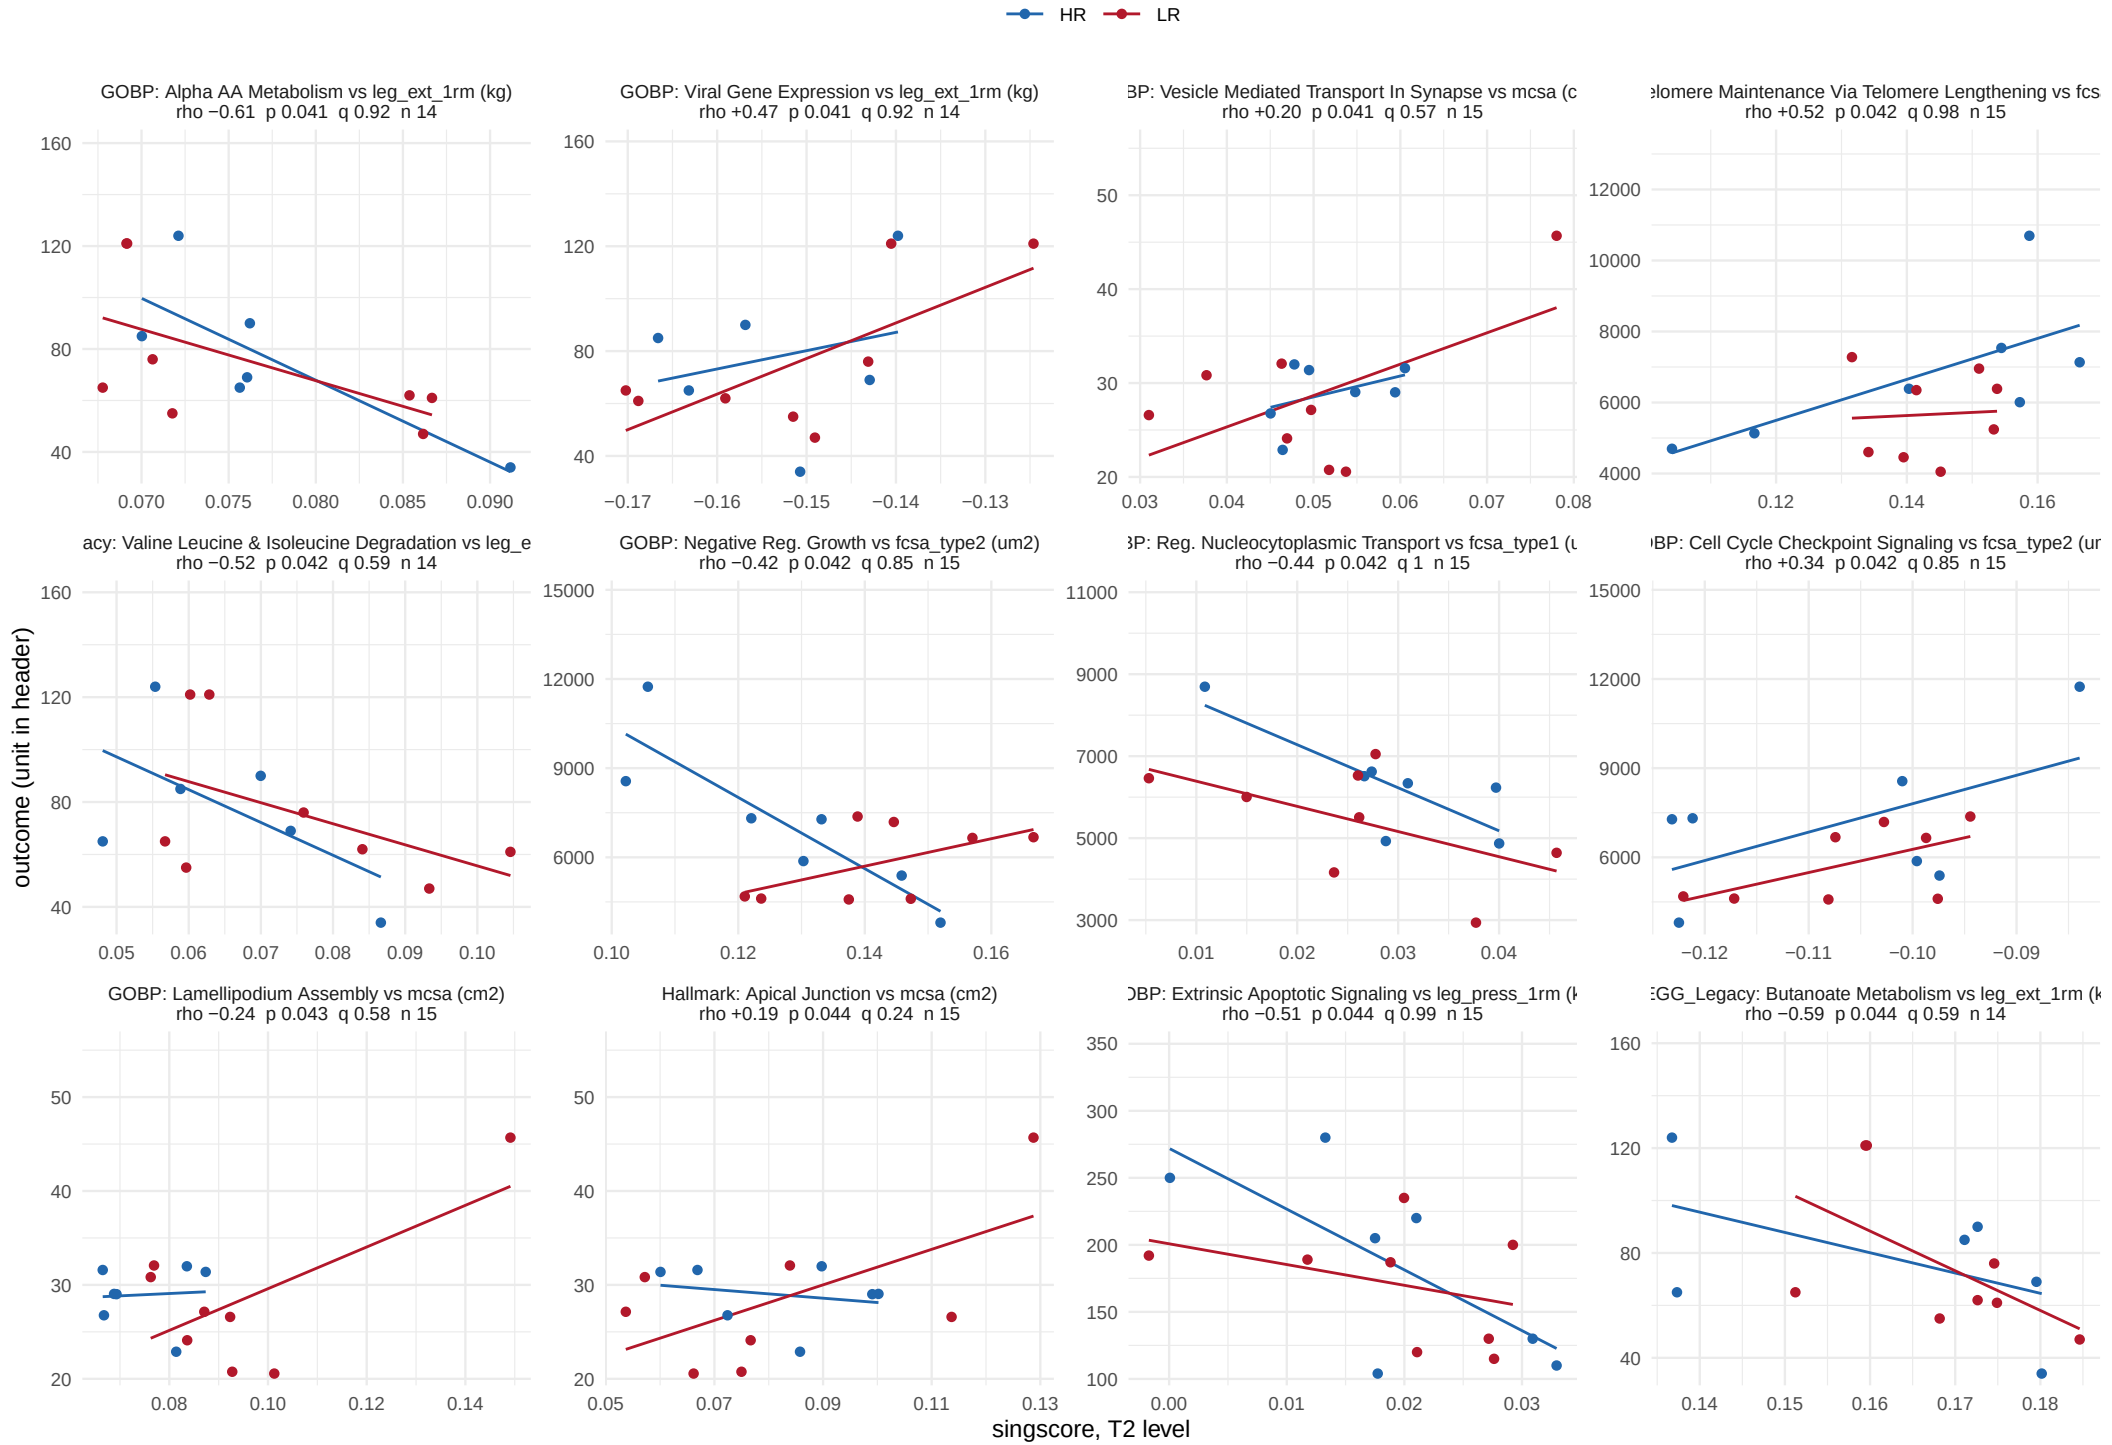

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, post_level window


346 of 8268 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 26 of 29.

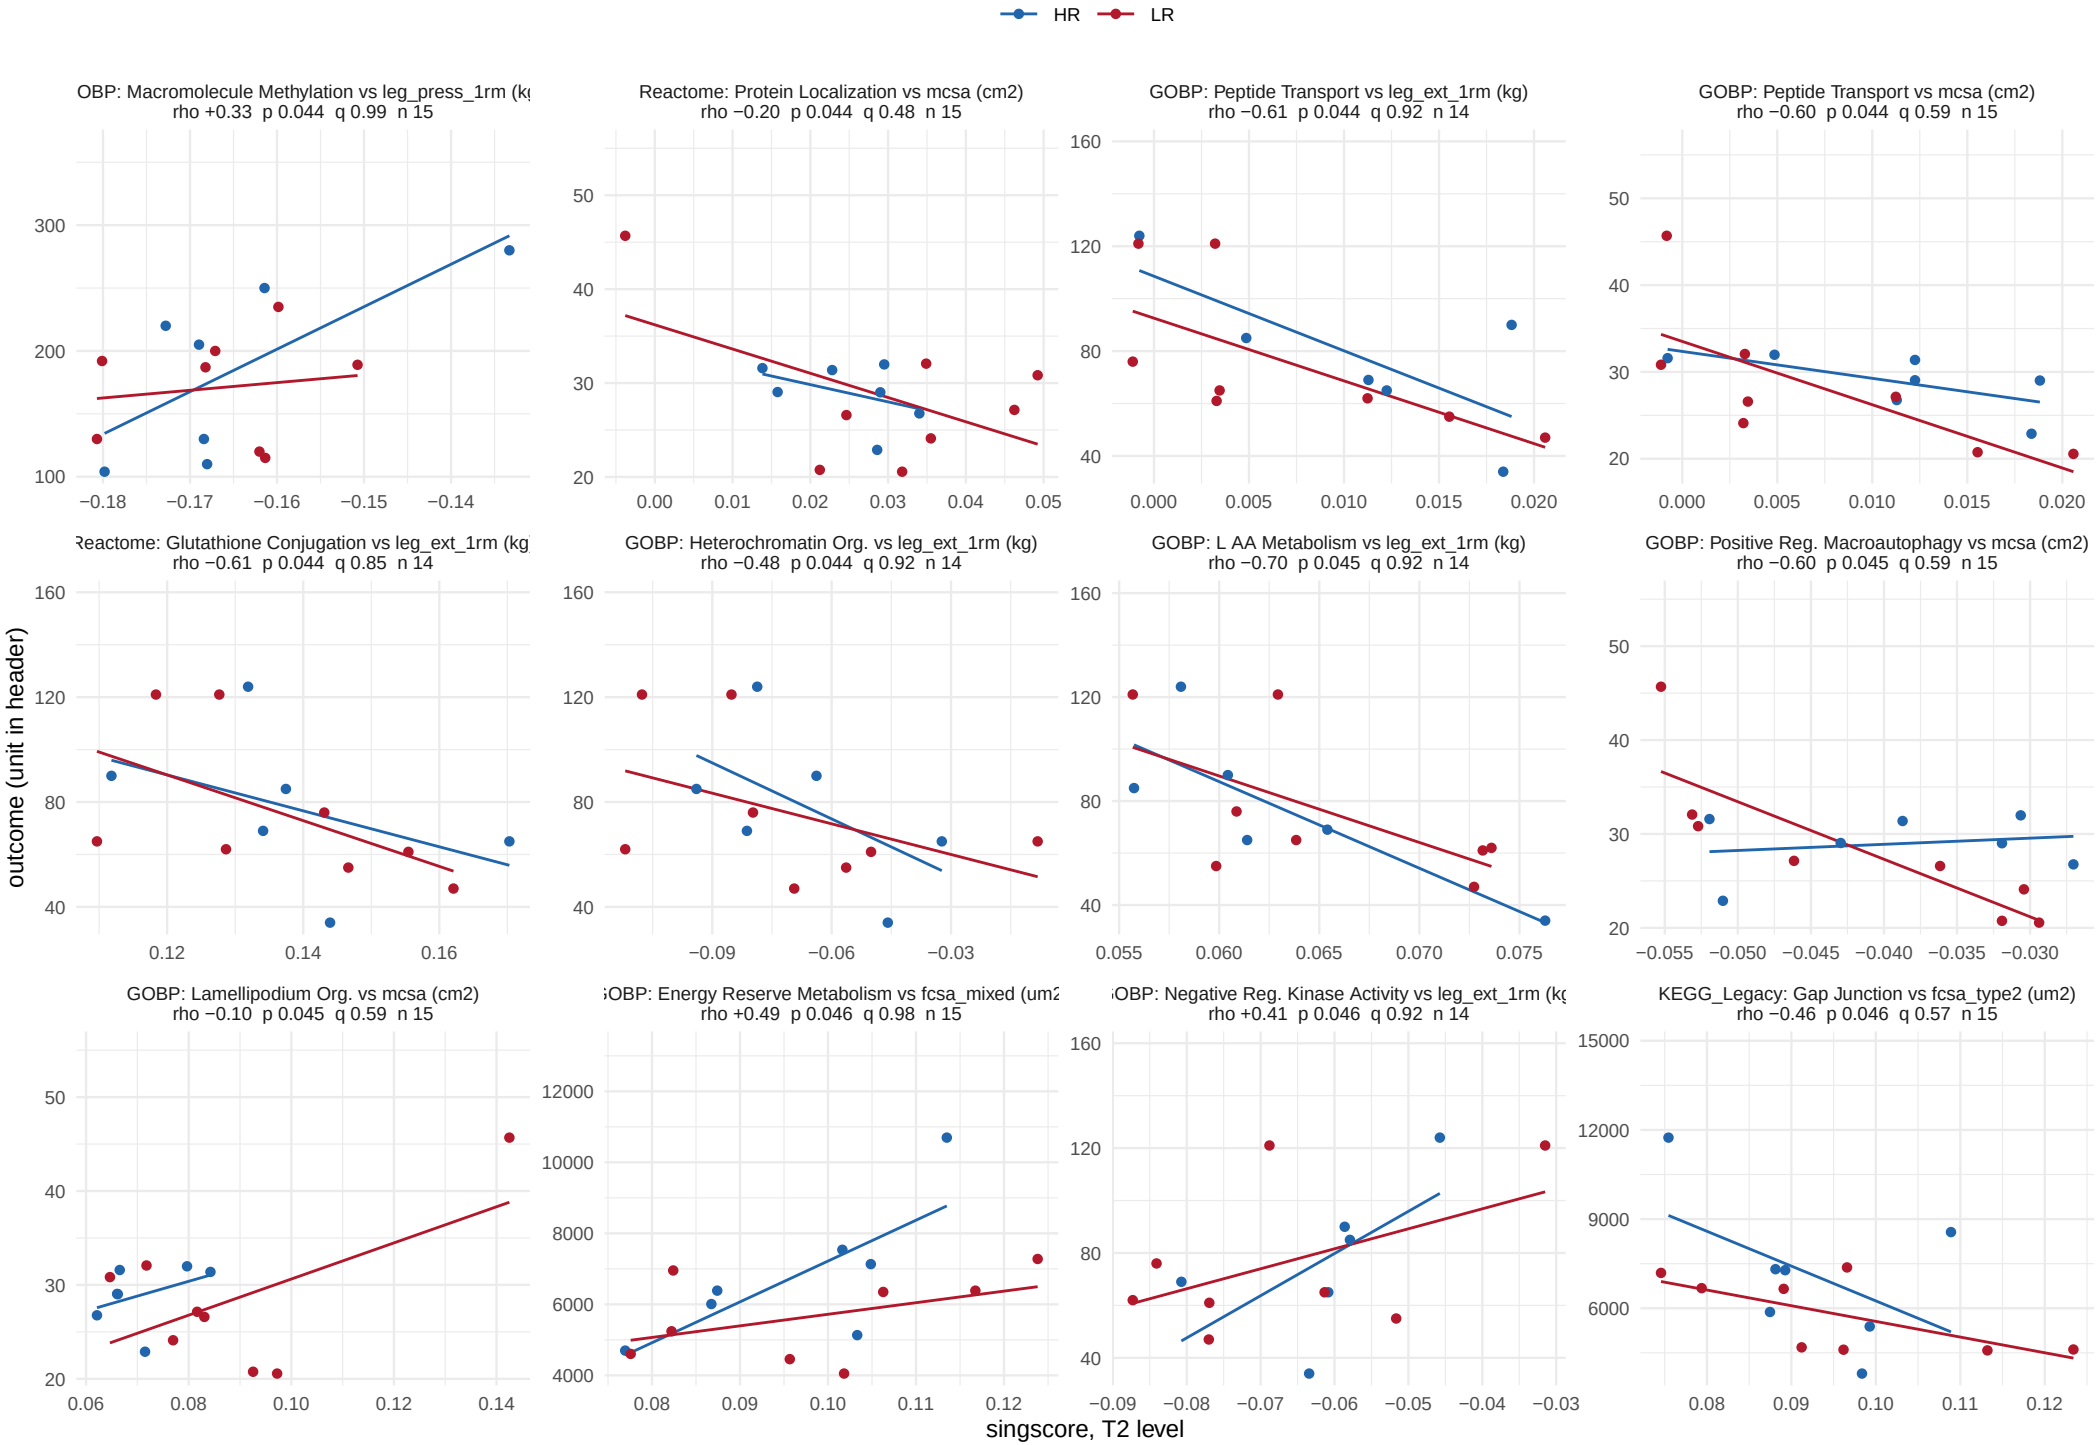

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, post_level window


346 of 8268 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 27 of 29.

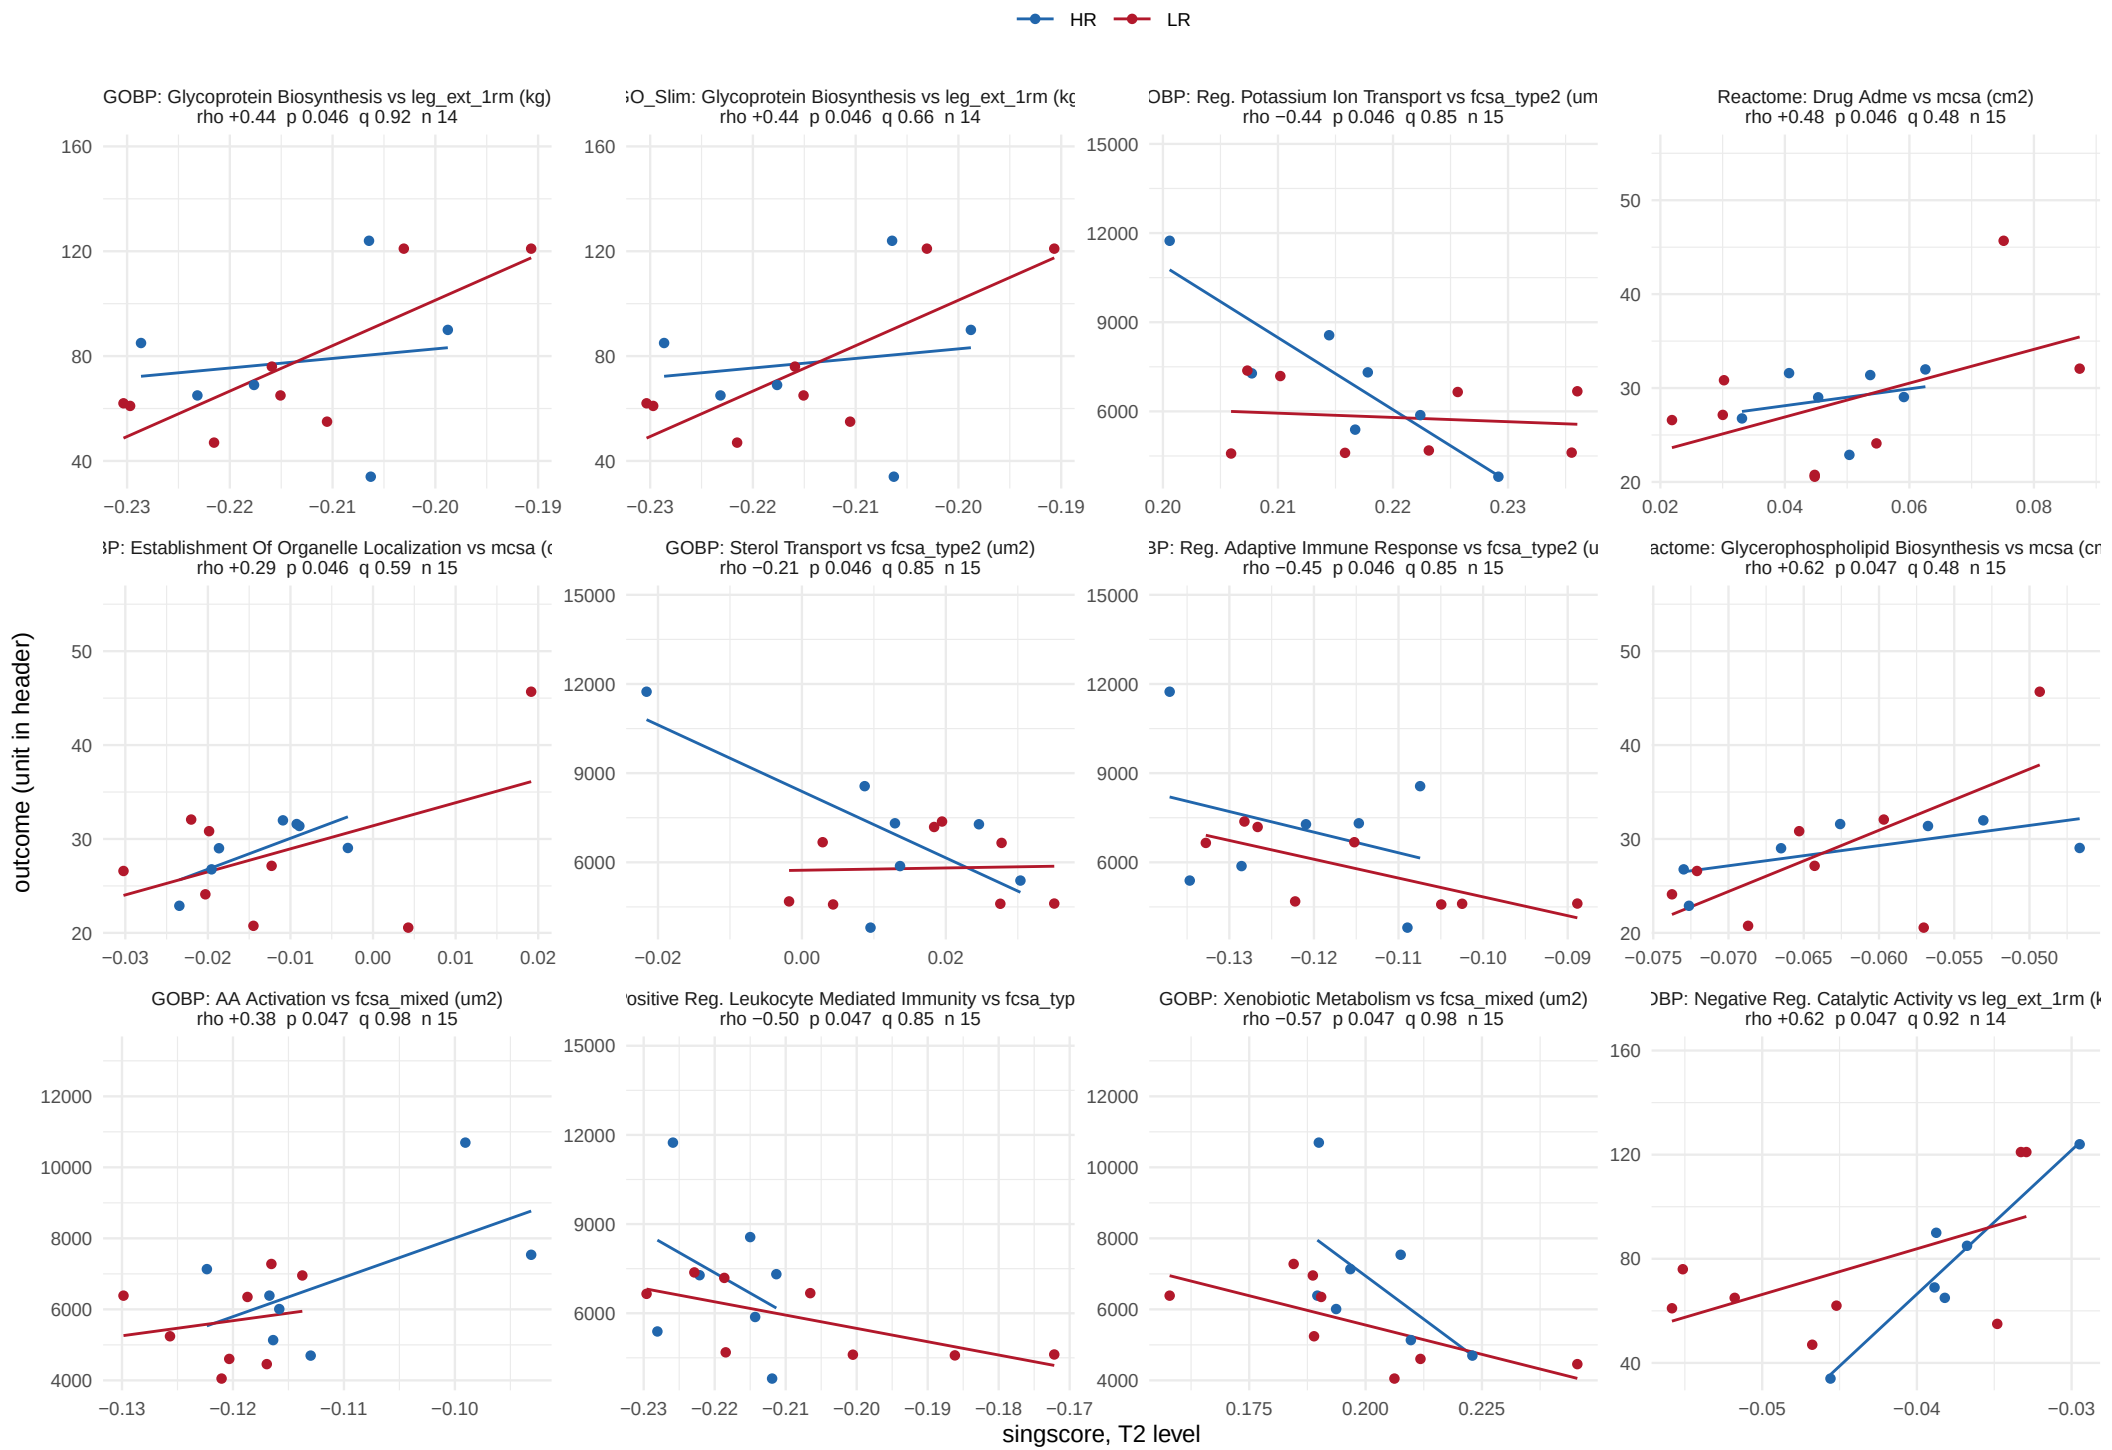

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, post_level window


346 of 8268 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 28 of 29.

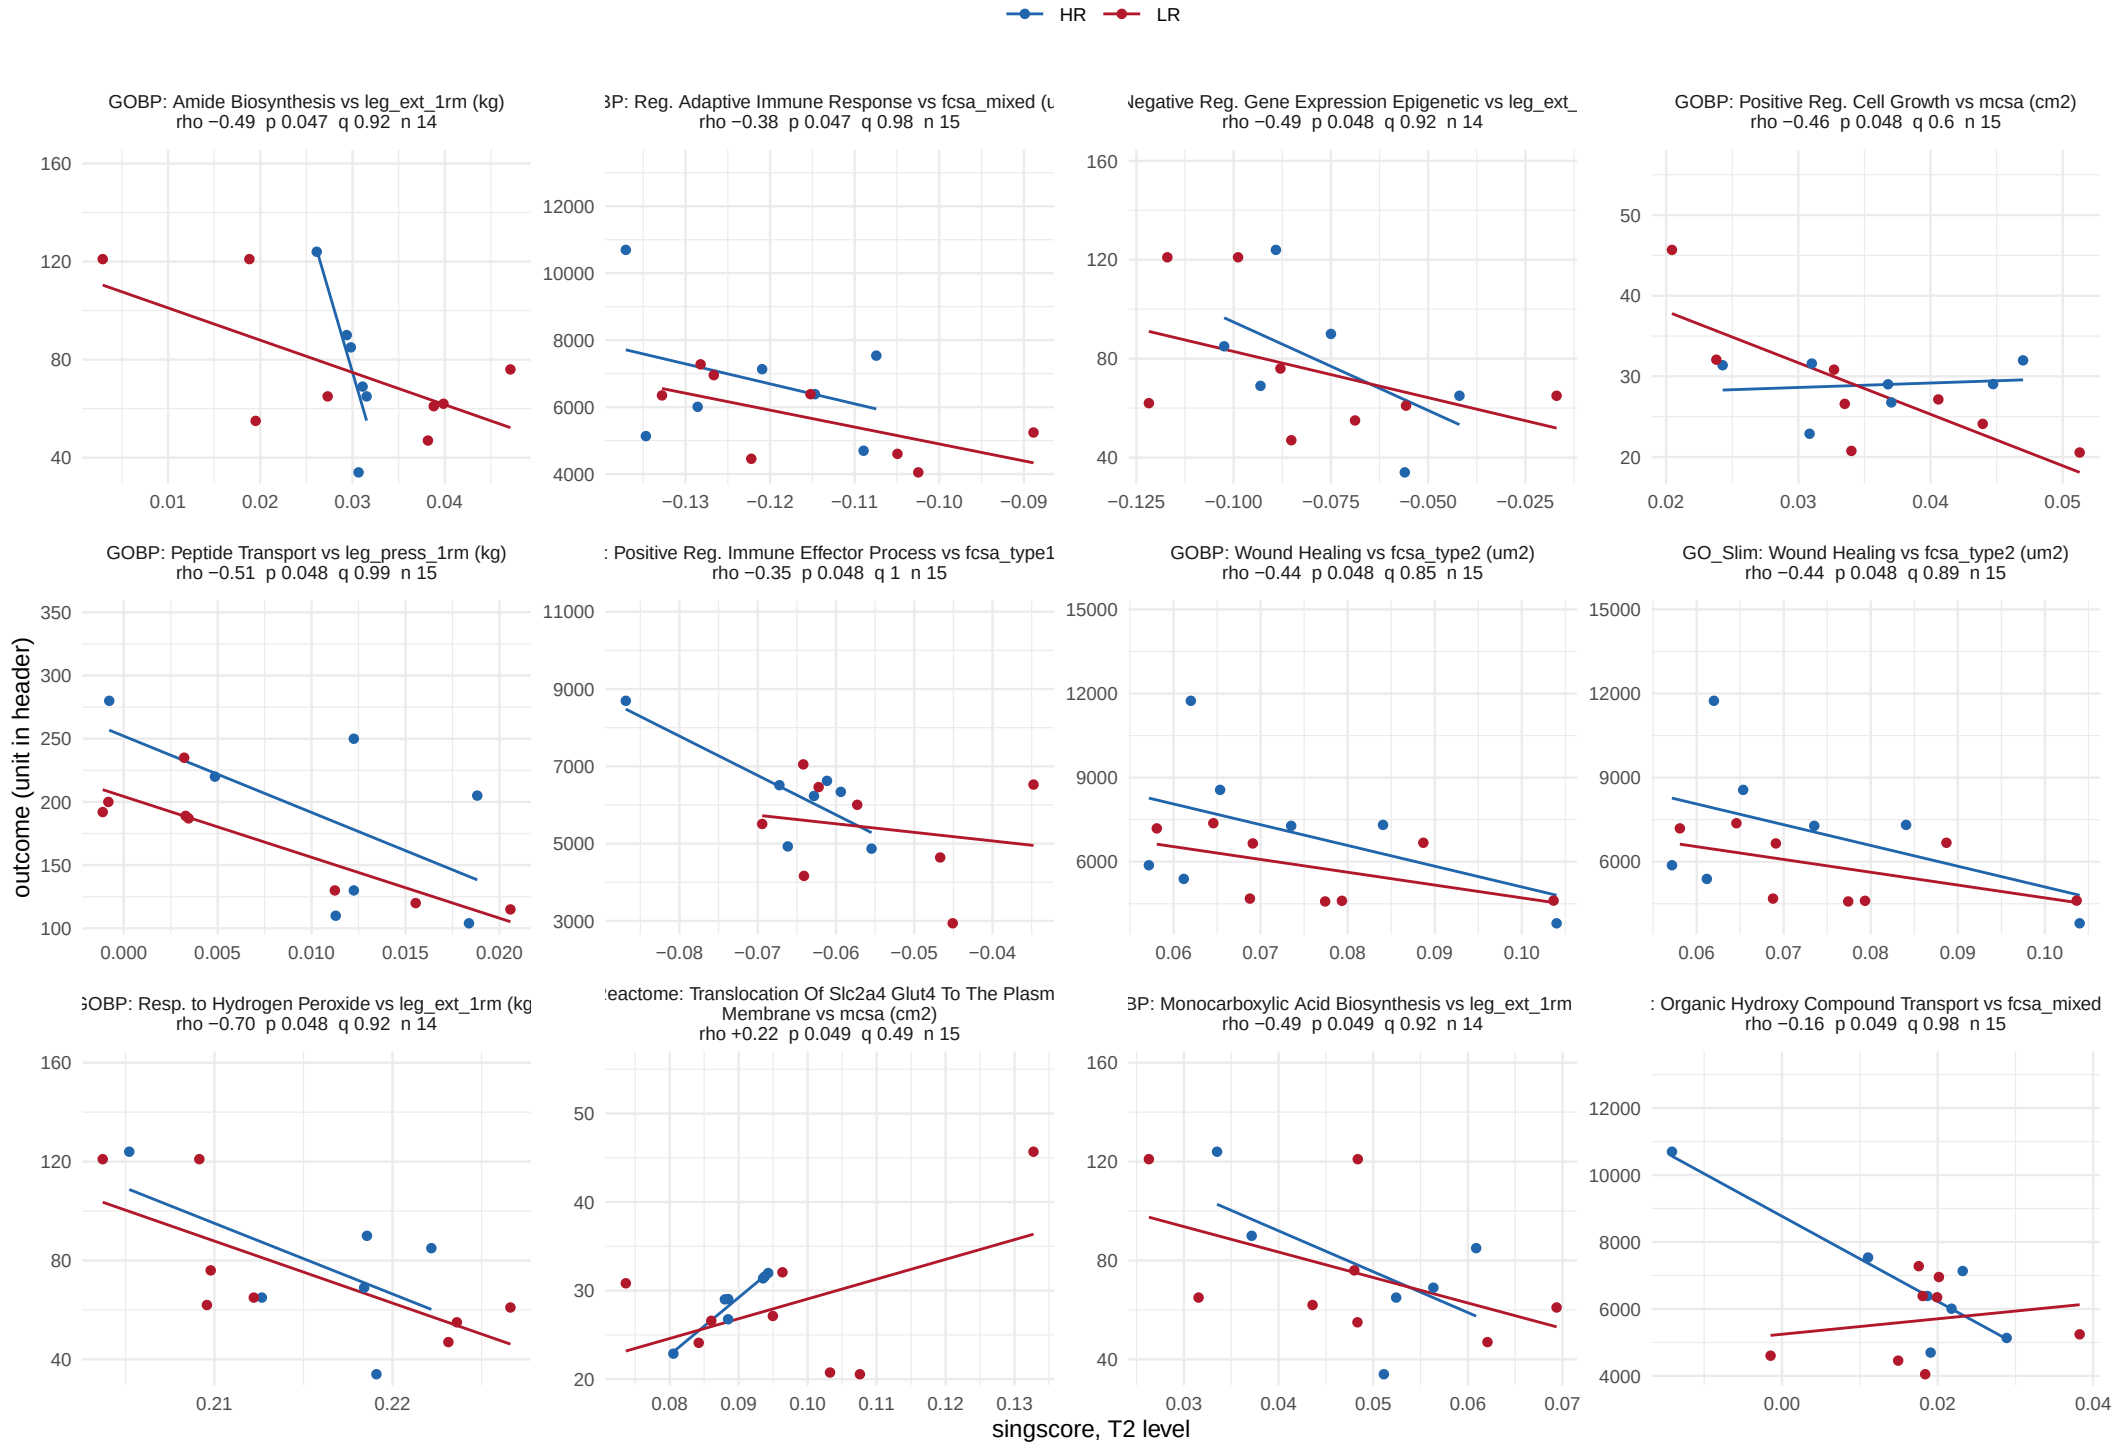

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Change score, post_level window


346 of 8268 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 29 of 29.

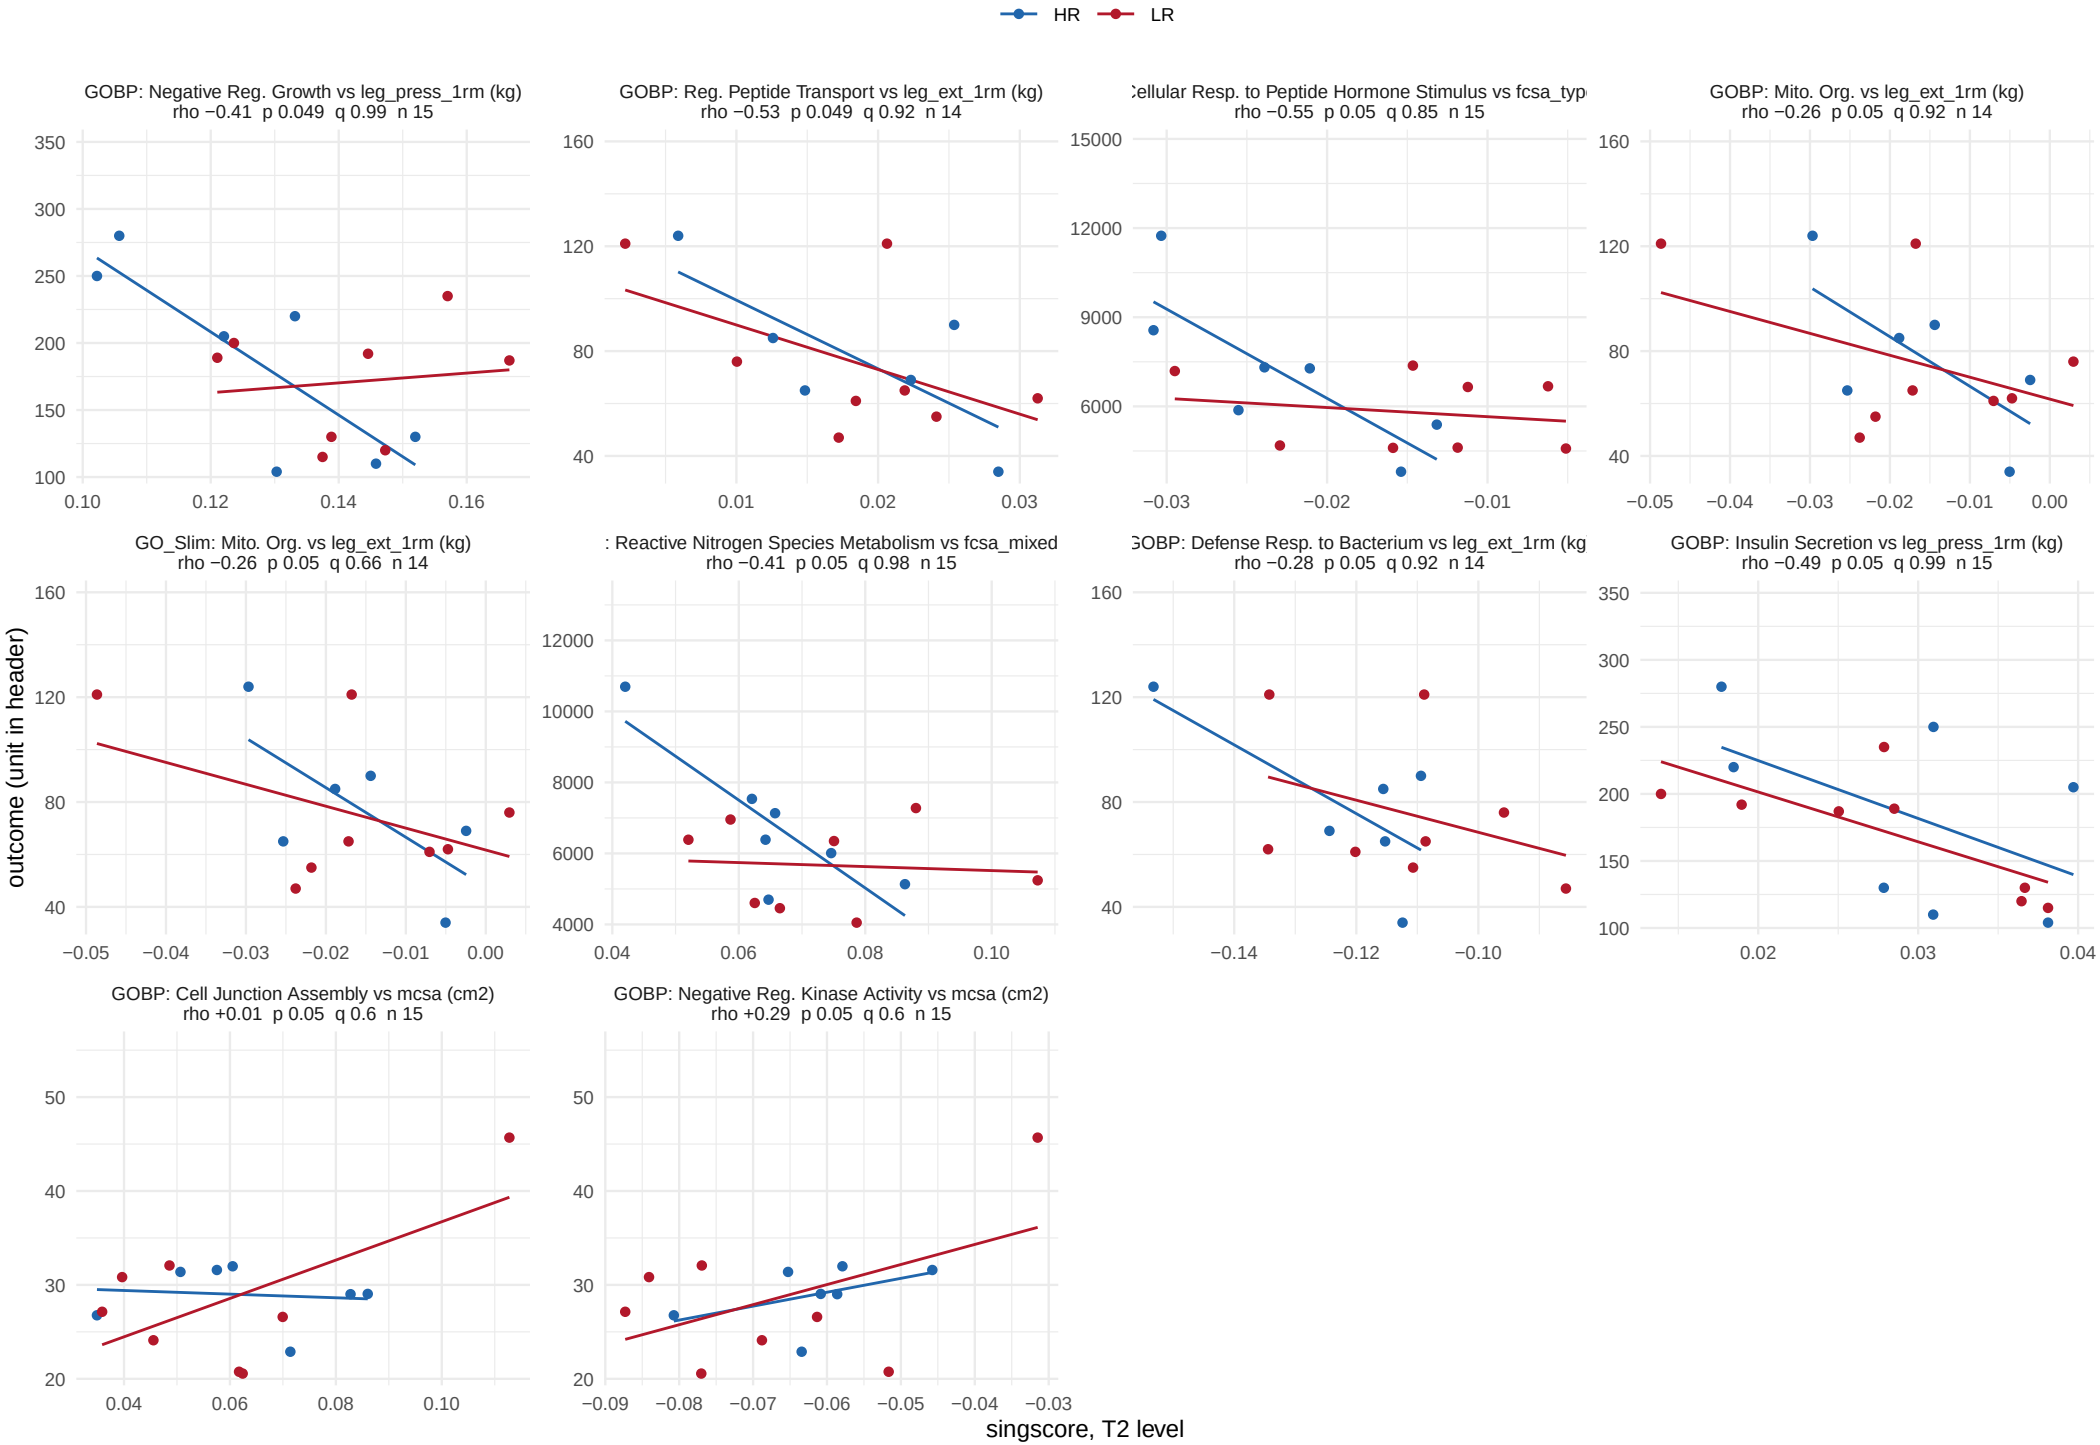

One point per subject. Lines are a least−squares fit per arm, drawn as a guide. Header: Spearman rho, and limma p and BH q pooled over both arms within window, outcome and collection, with the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/05_associate.xlsx, change_score and change_score_by_arm.

Arm difference, training window


604 of 9646 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 1 of 51.

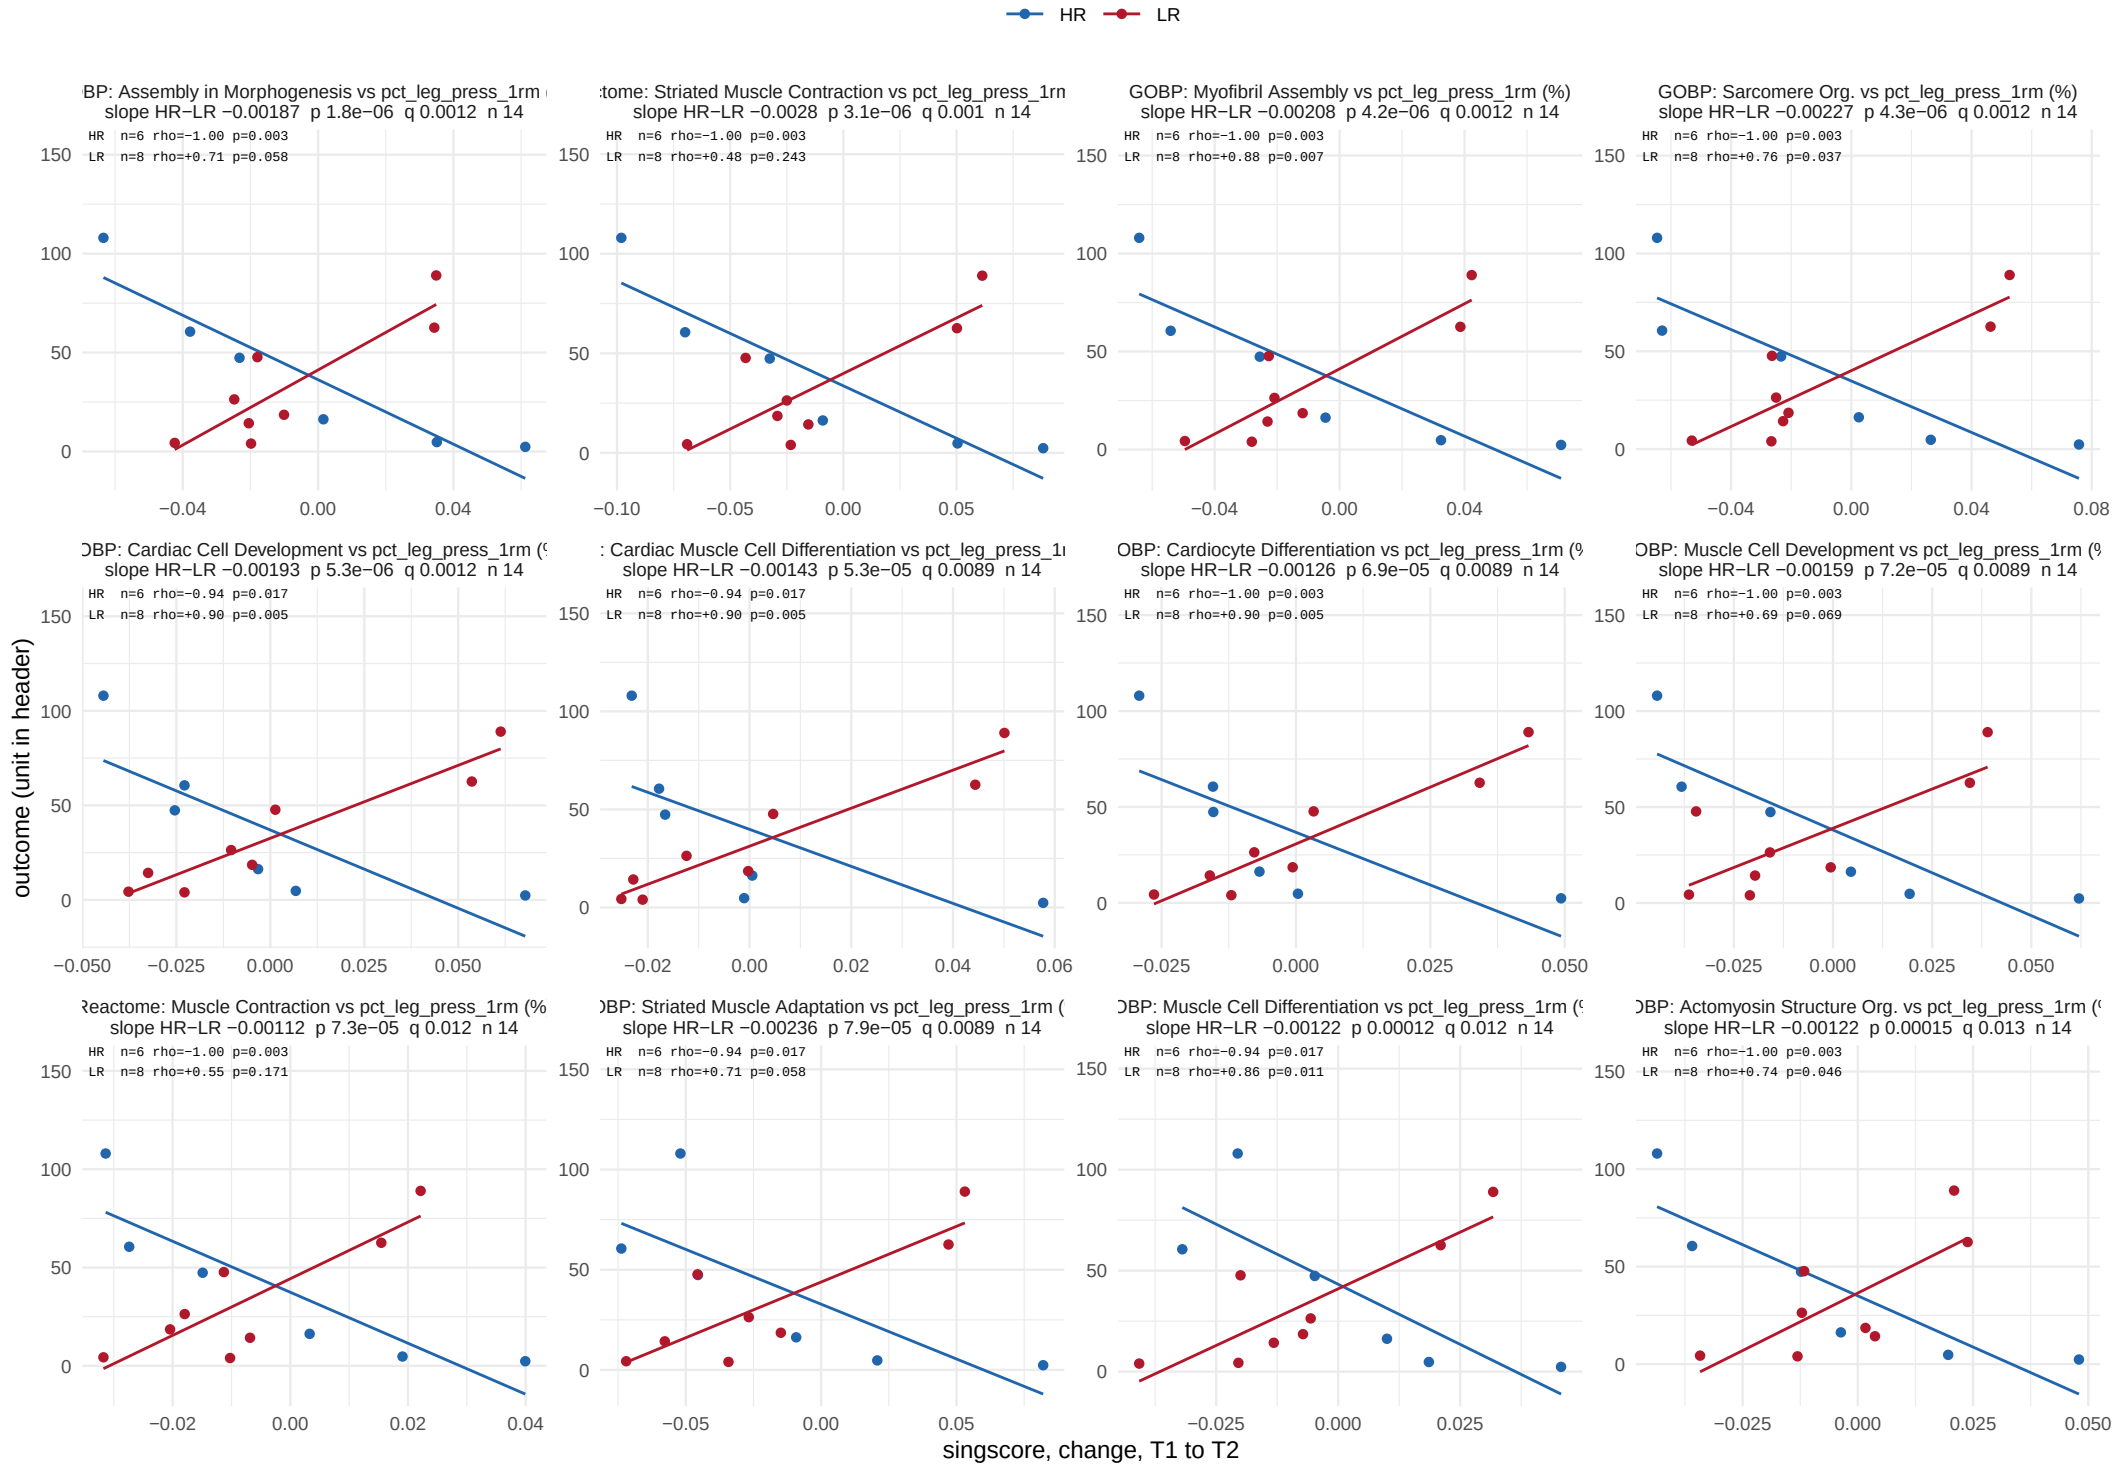

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, training window


604 of 9646 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 2 of 51.

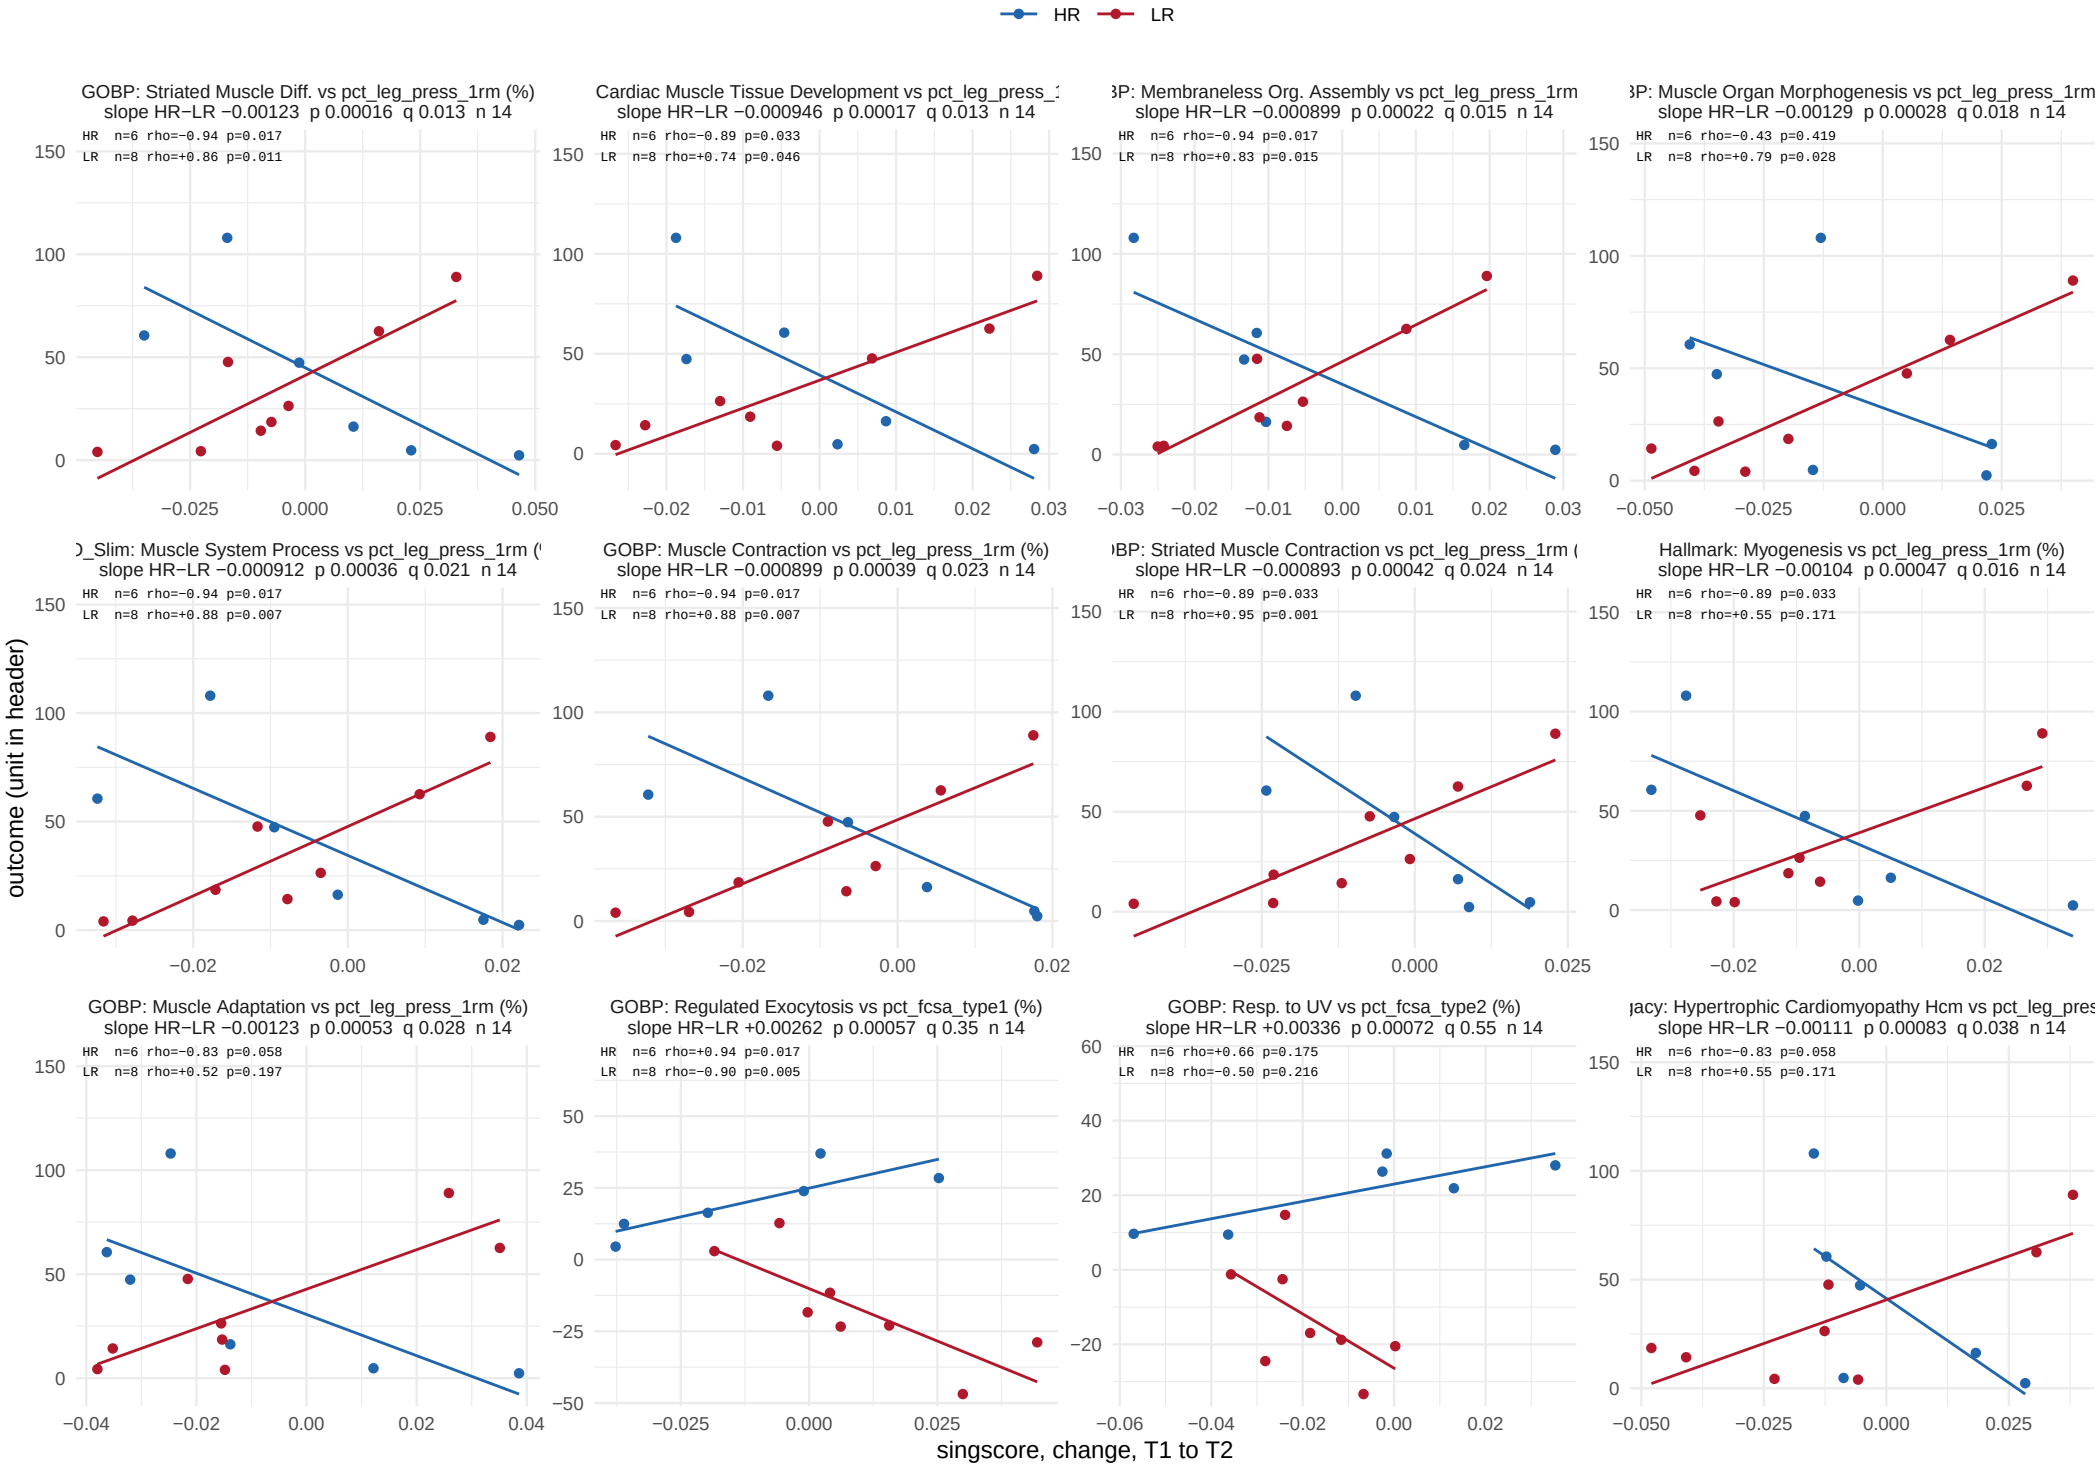

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, training window


604 of 9646 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 3 of 51.

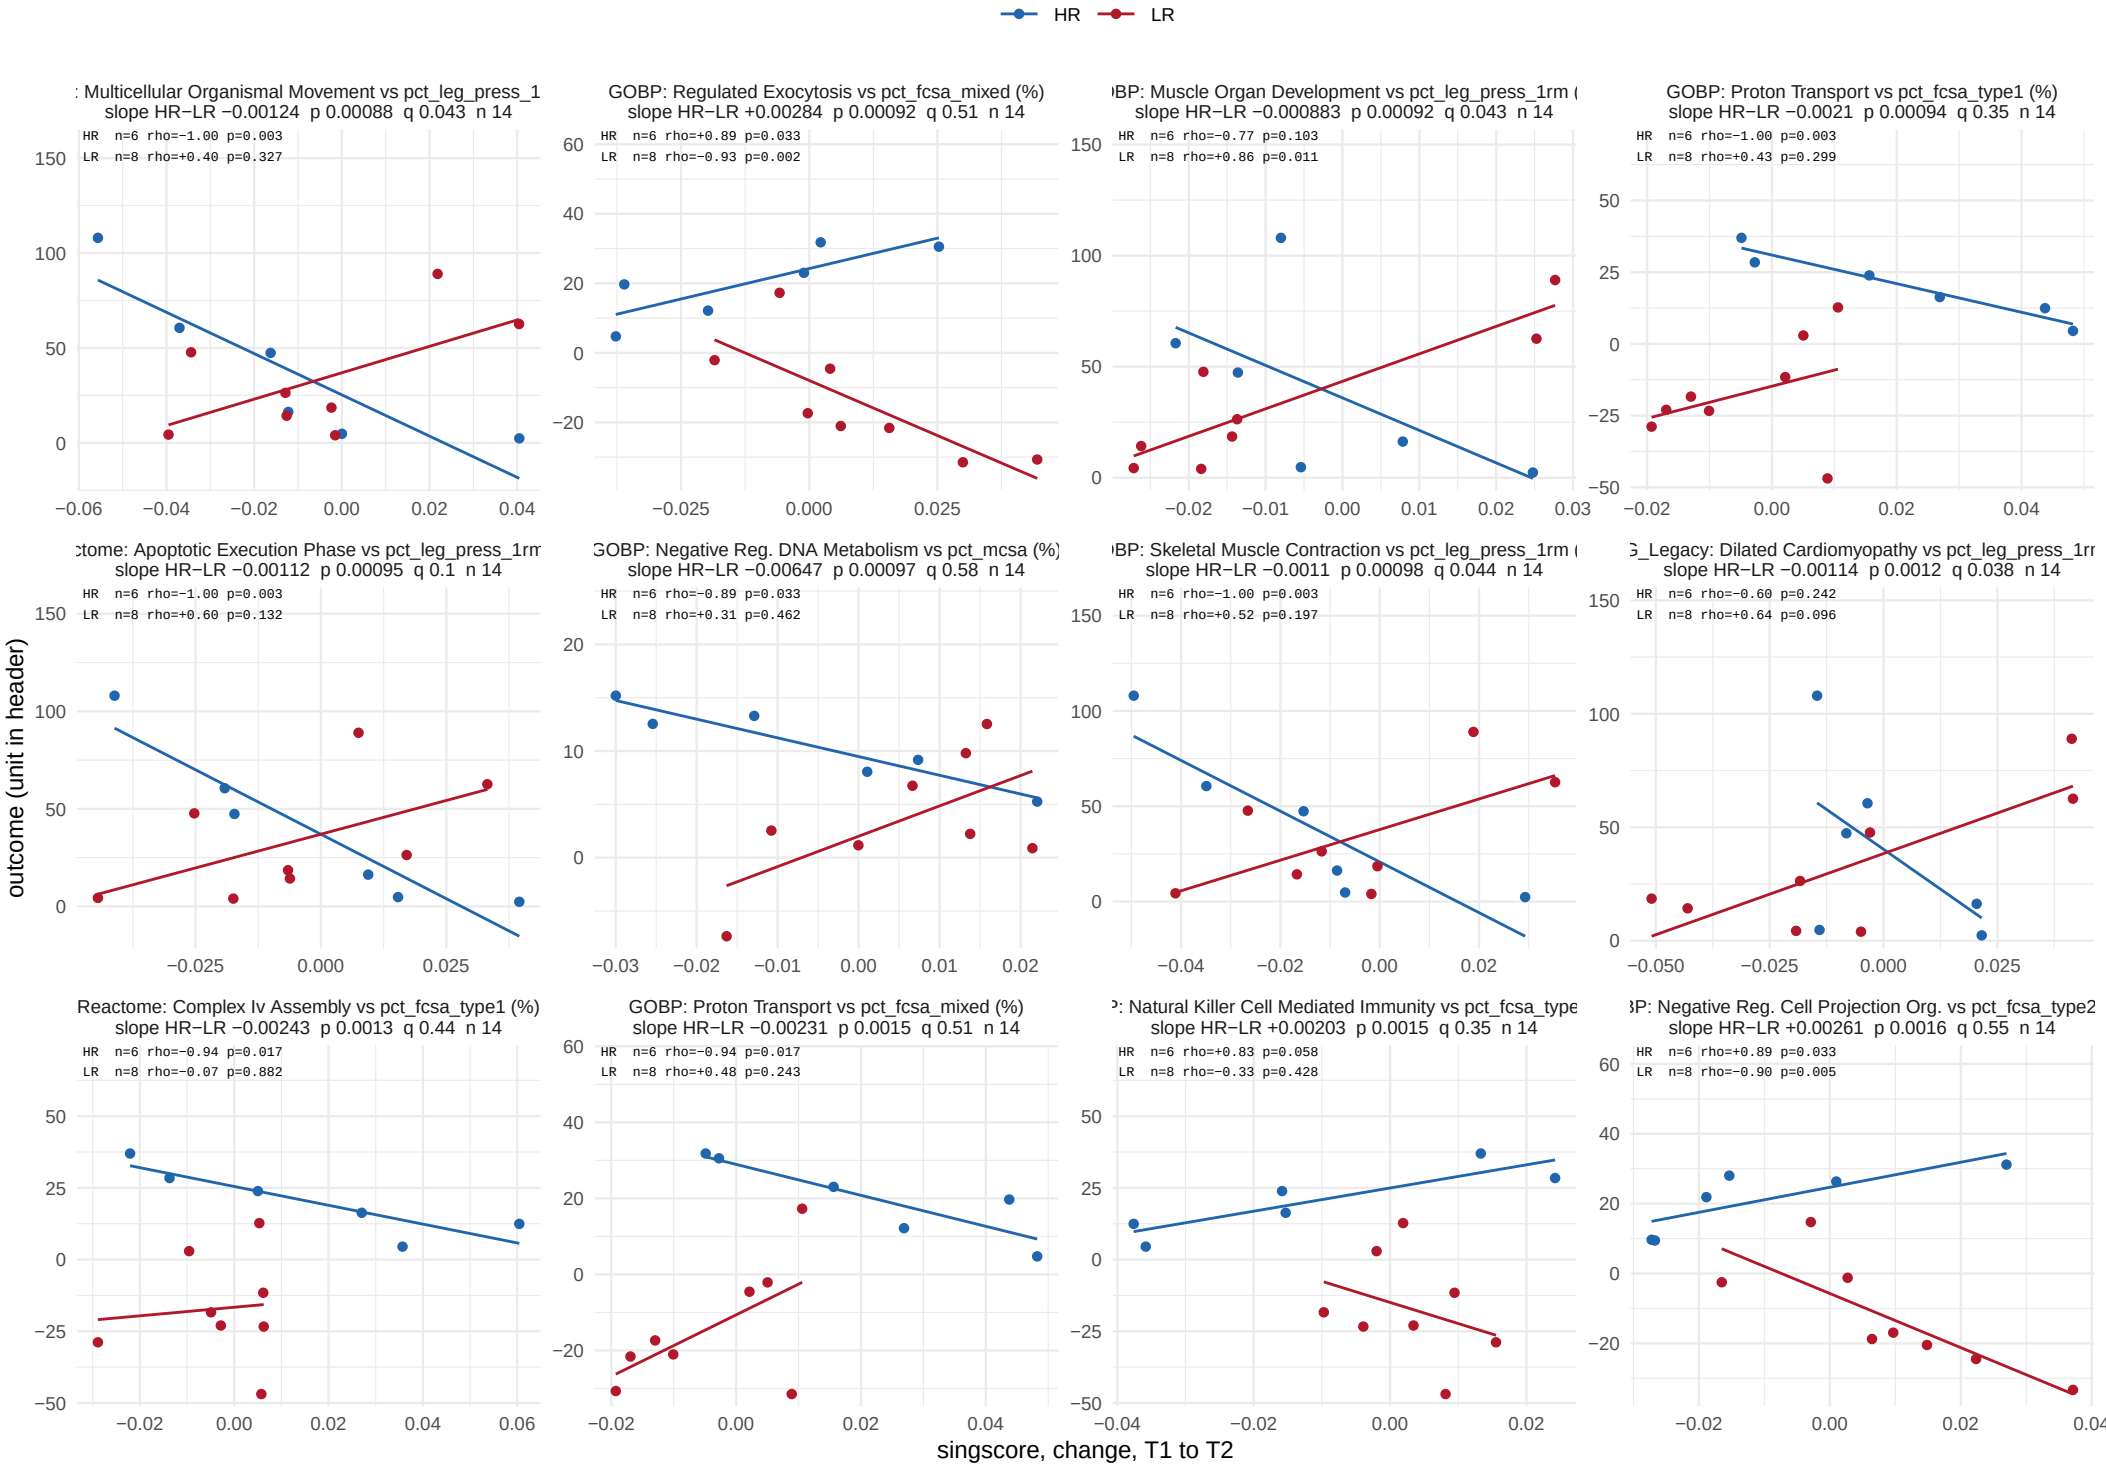

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, training window


604 of 9646 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 4 of 51.

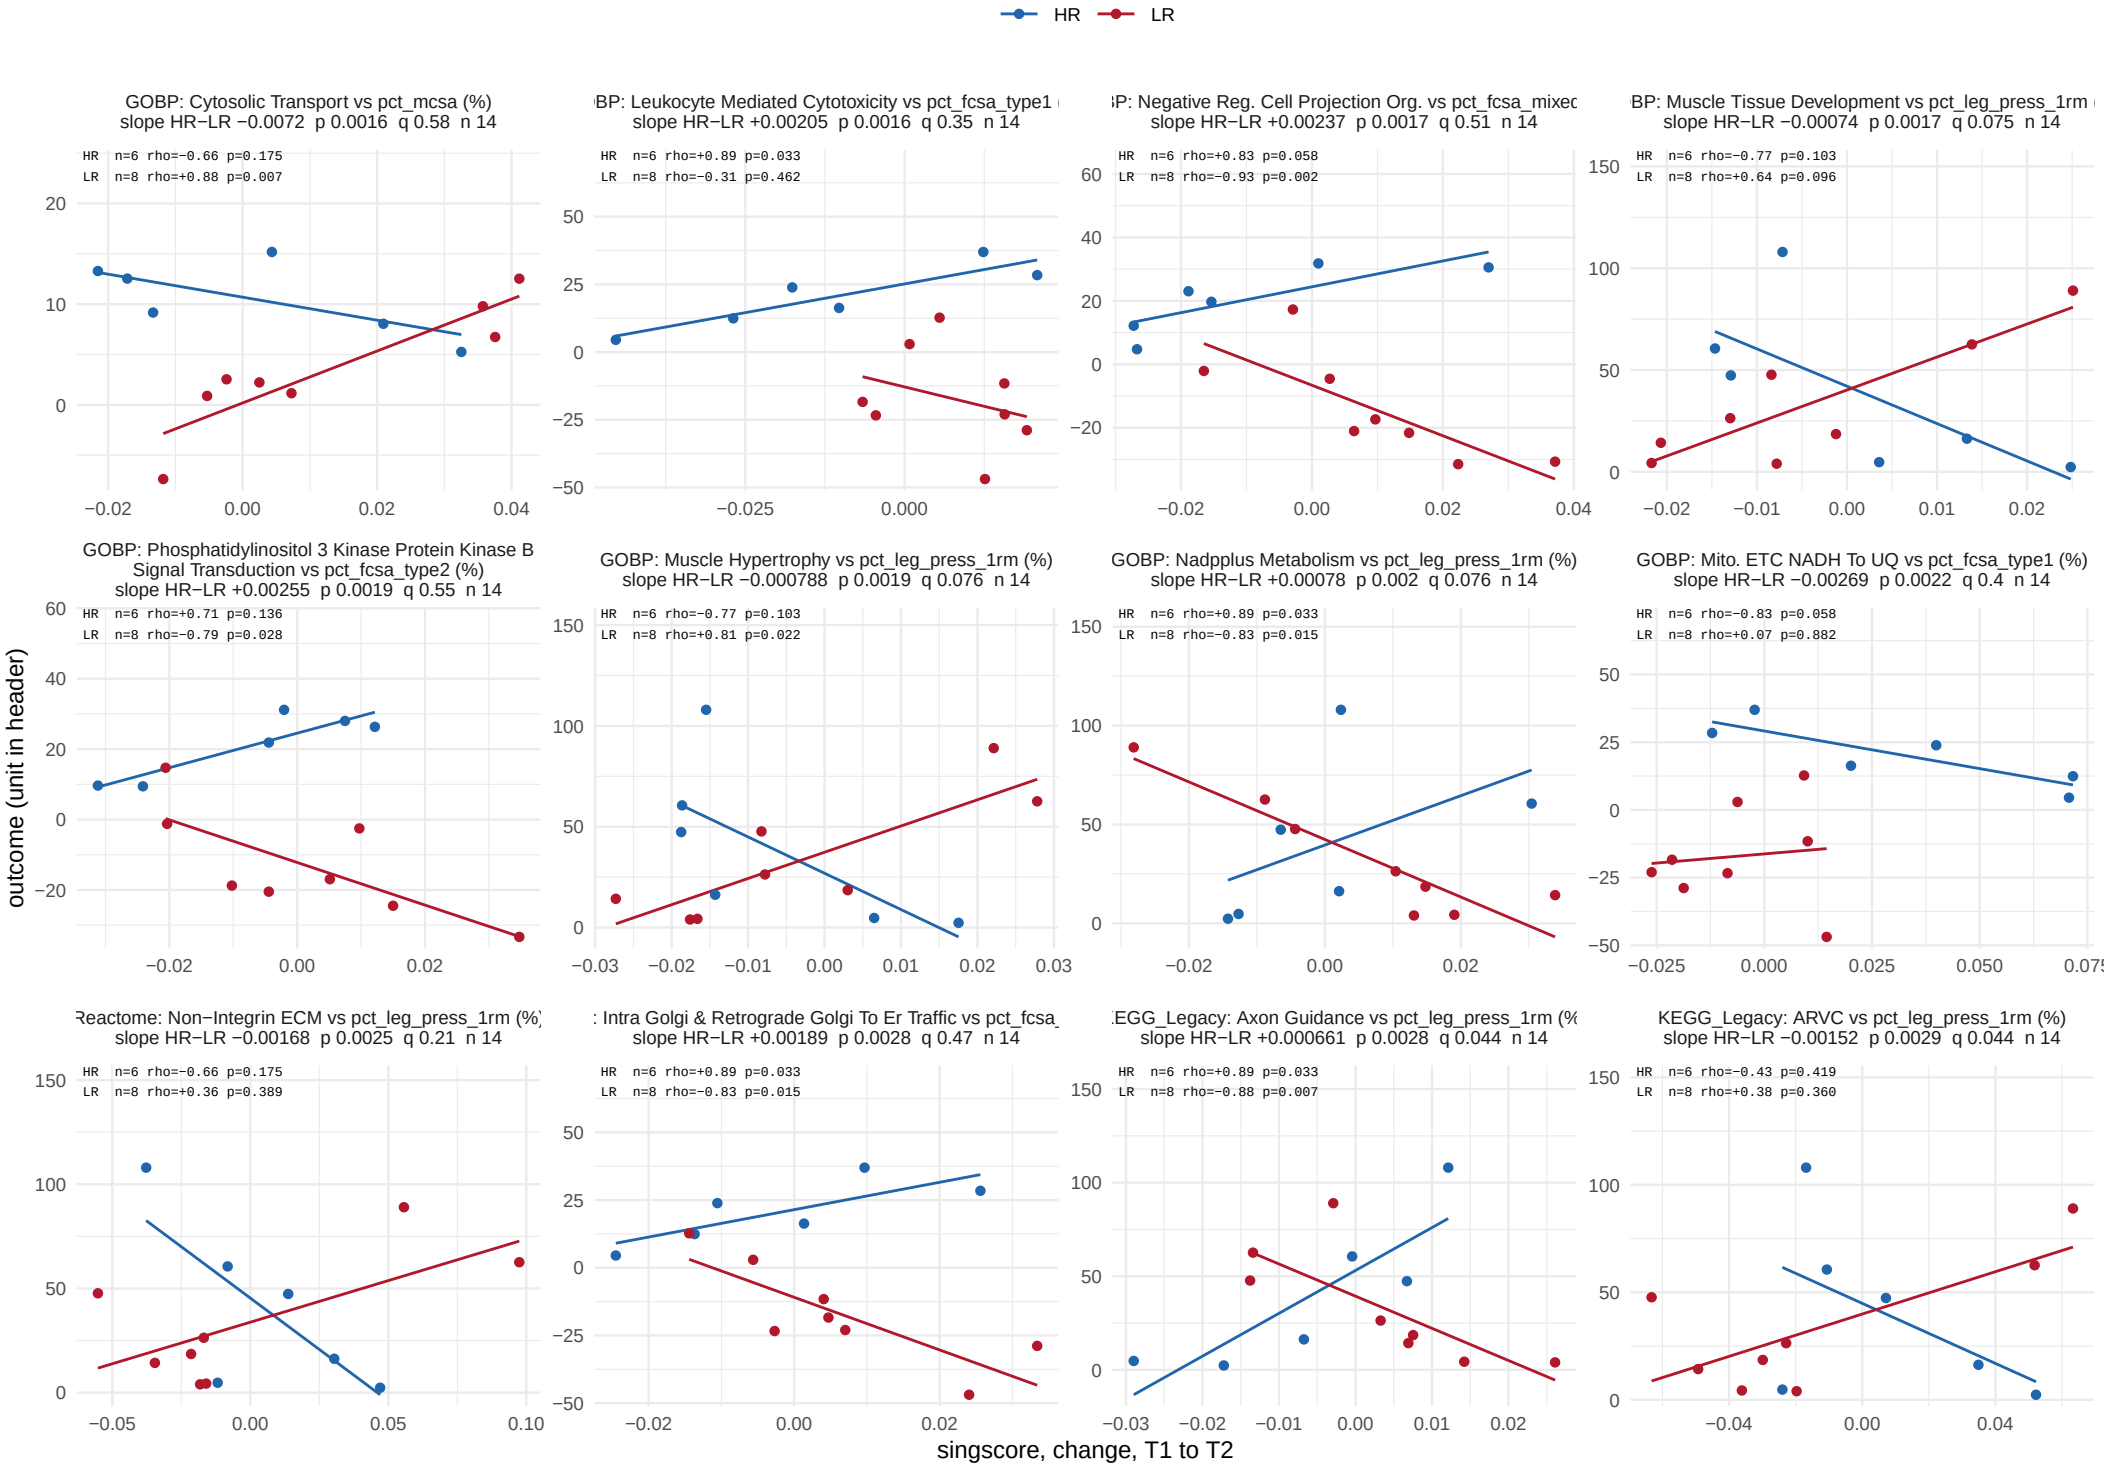

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, training window


604 of 9646 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 5 of 51.

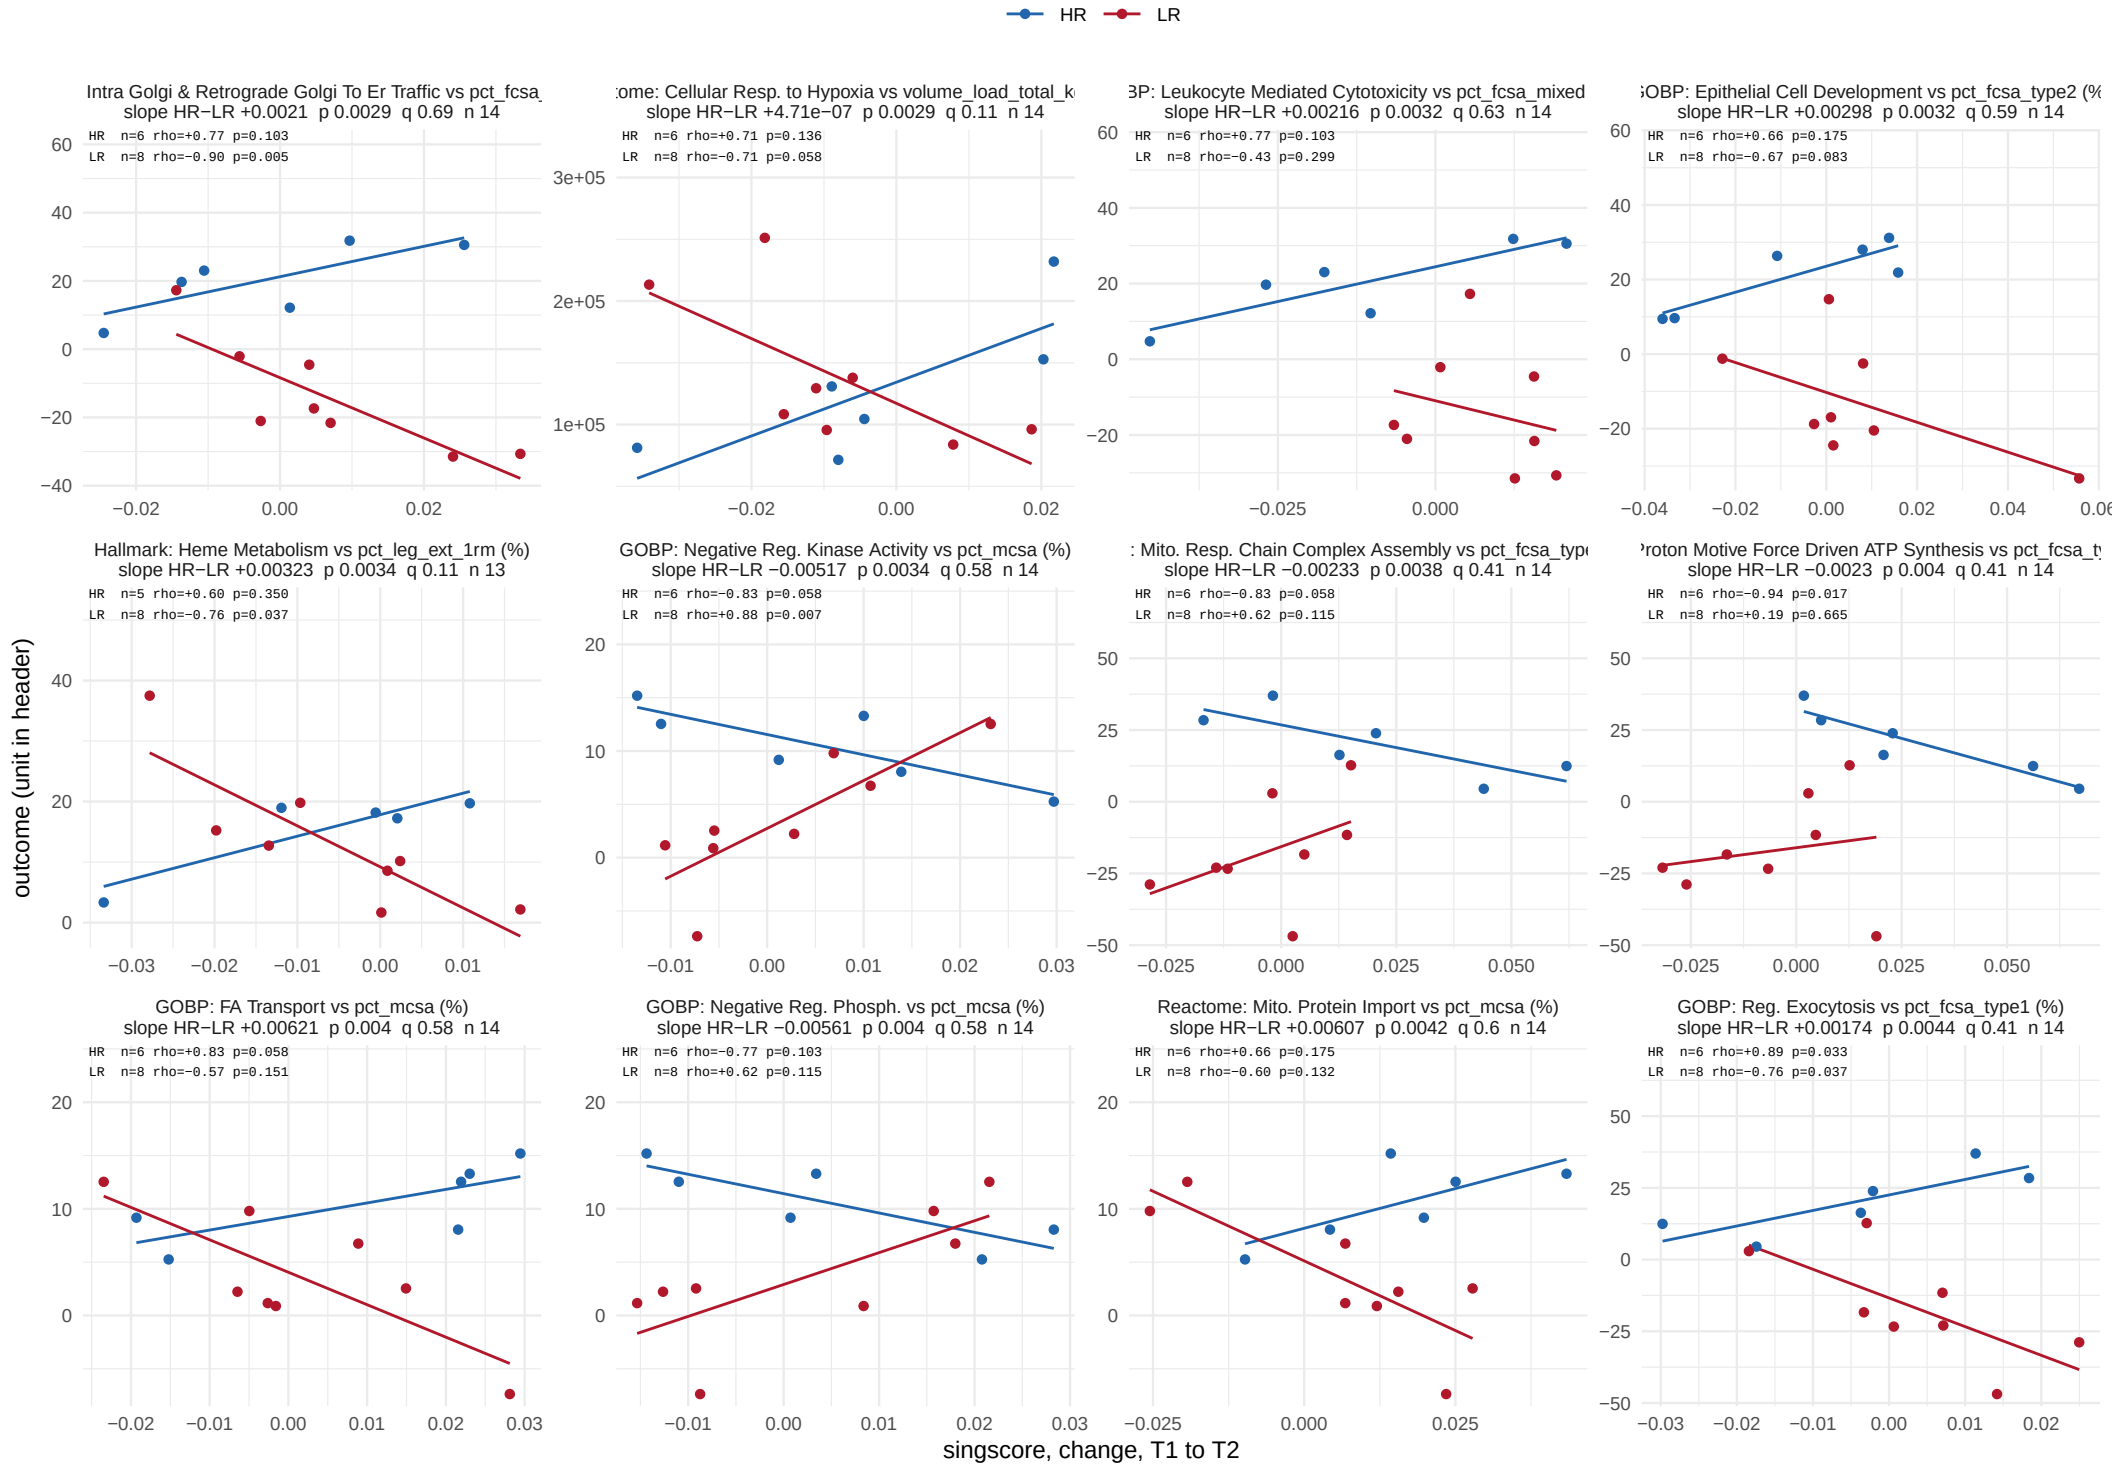

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, training window


604 of 9646 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 6 of 51.

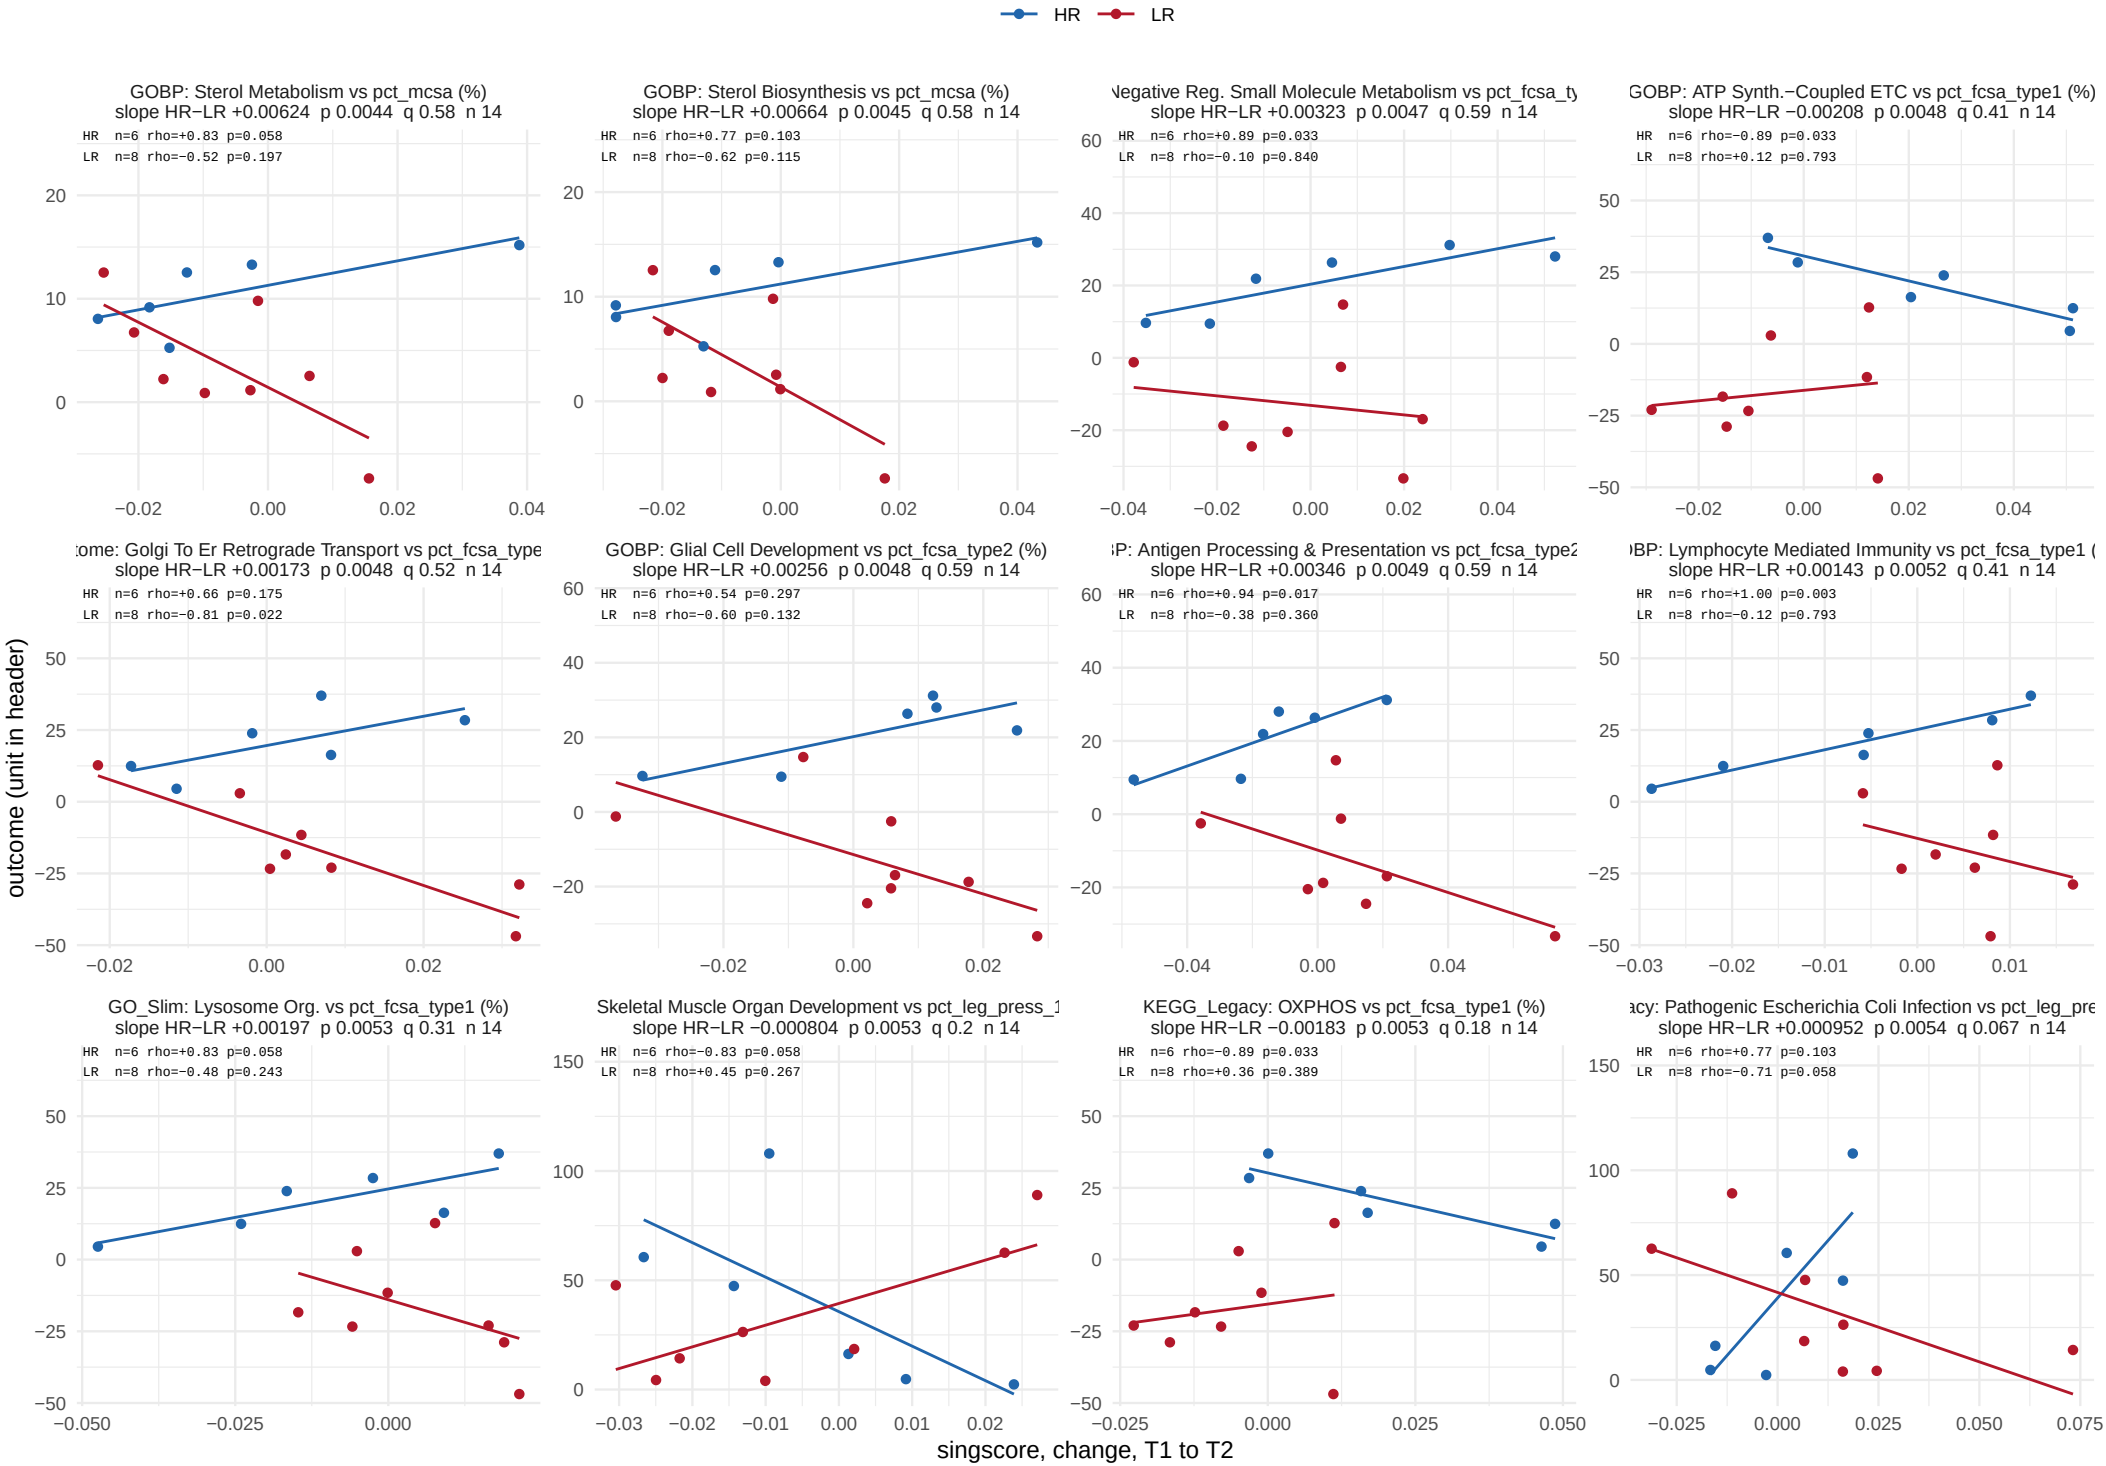

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, training window


604 of 9646 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 7 of 51.

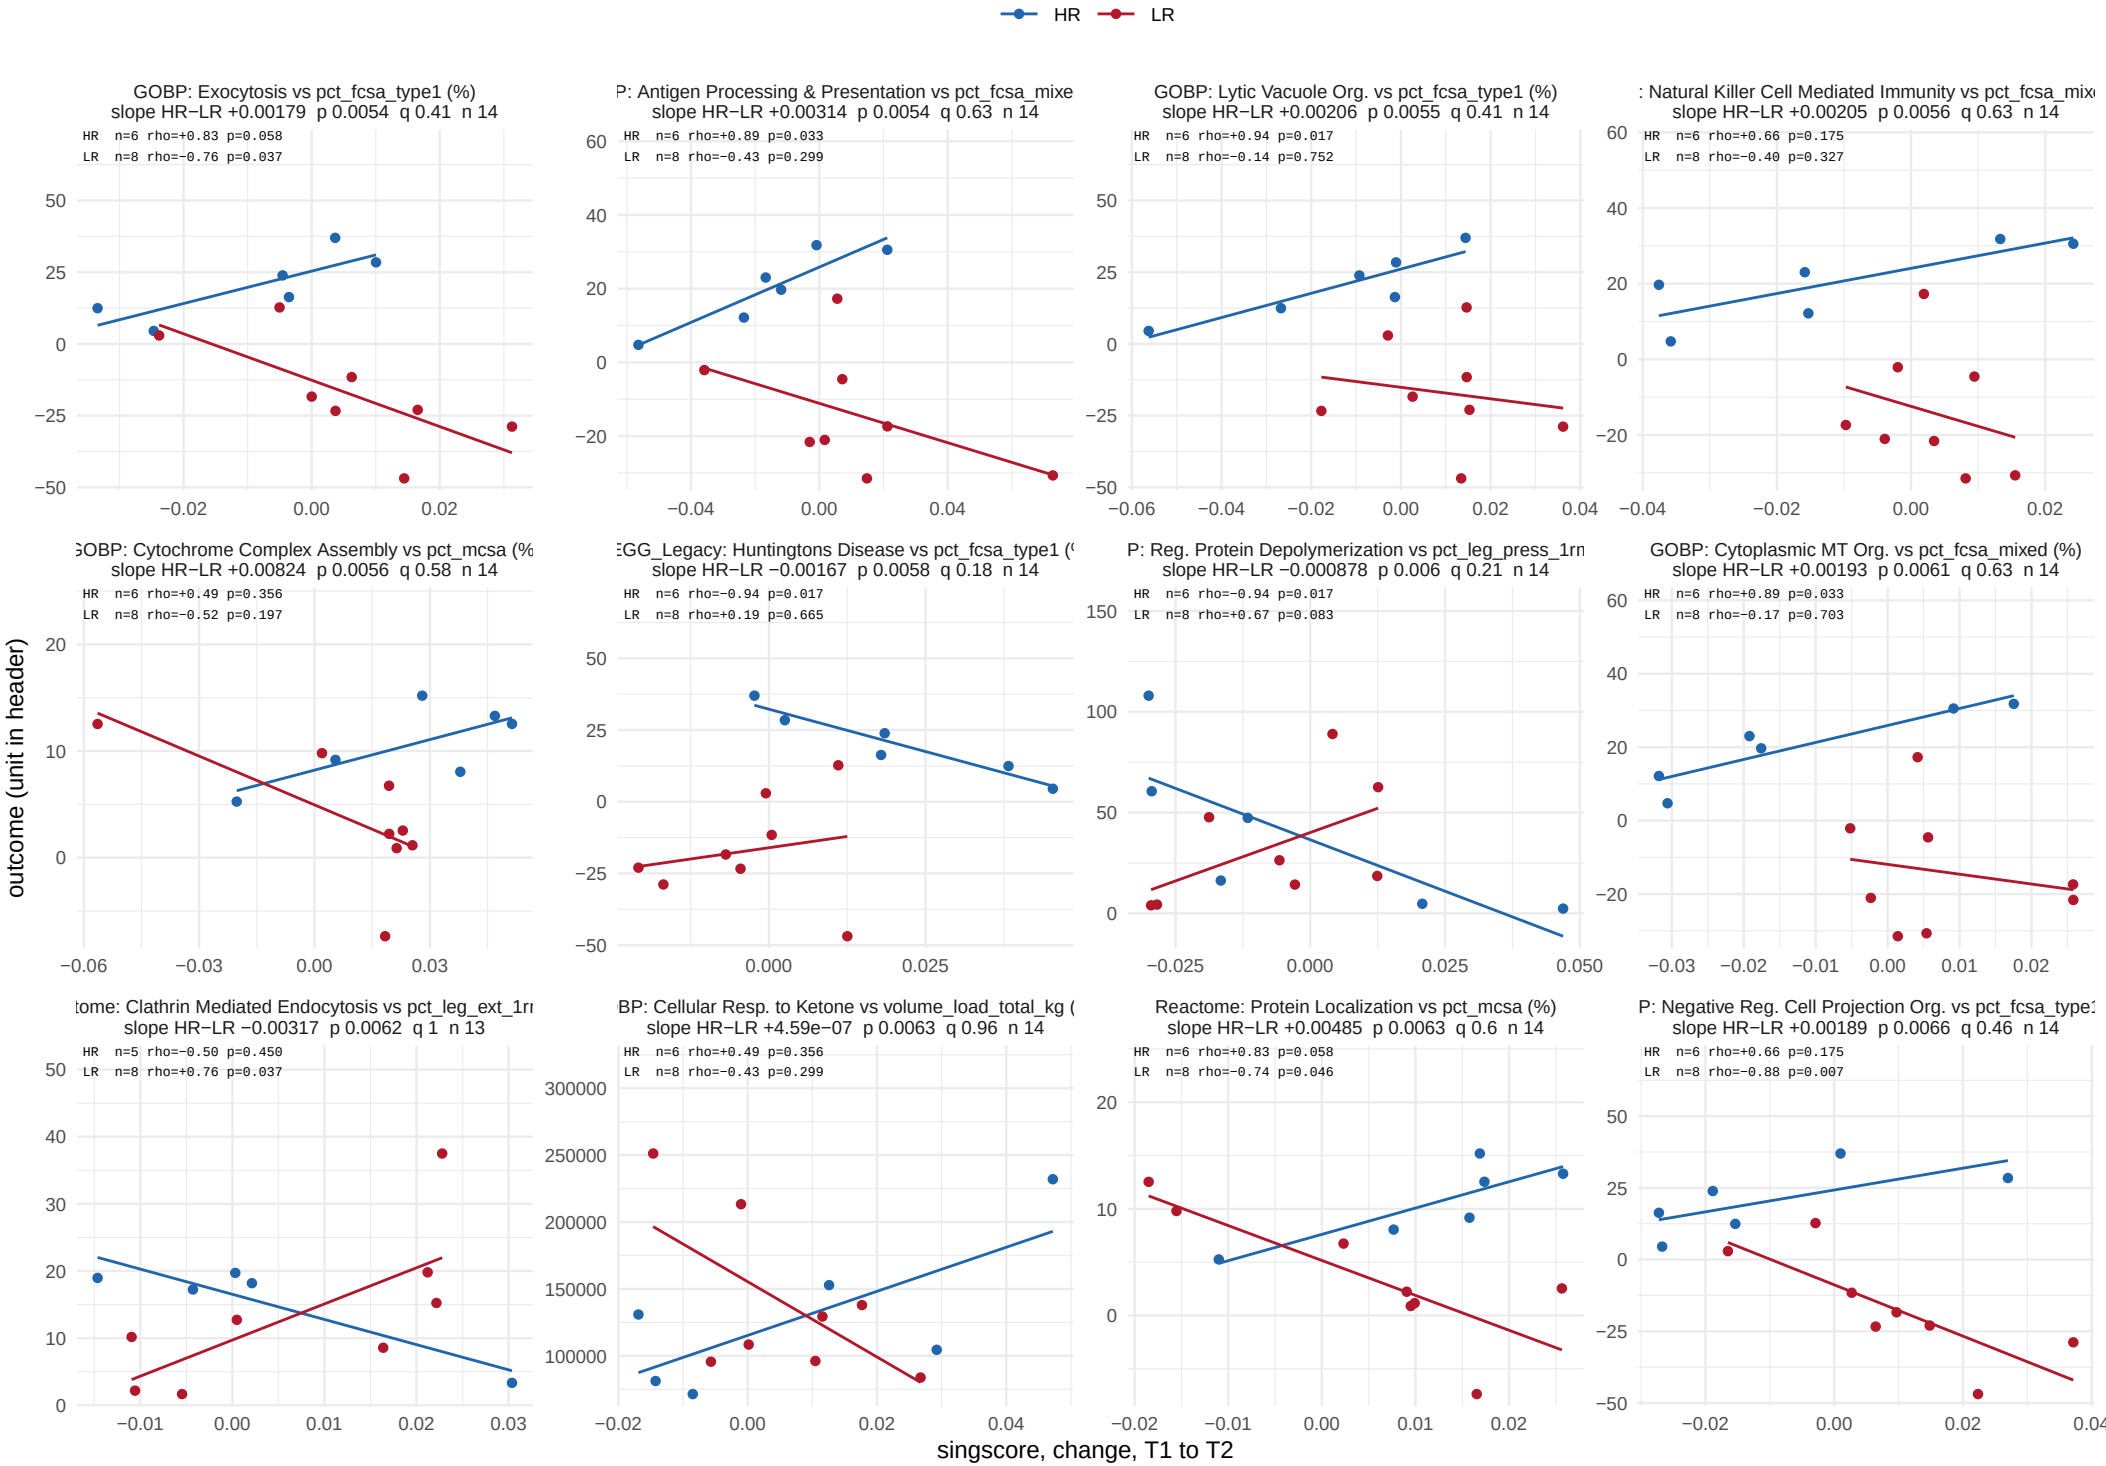

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, training window


604 of 9646 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 8 of 51.

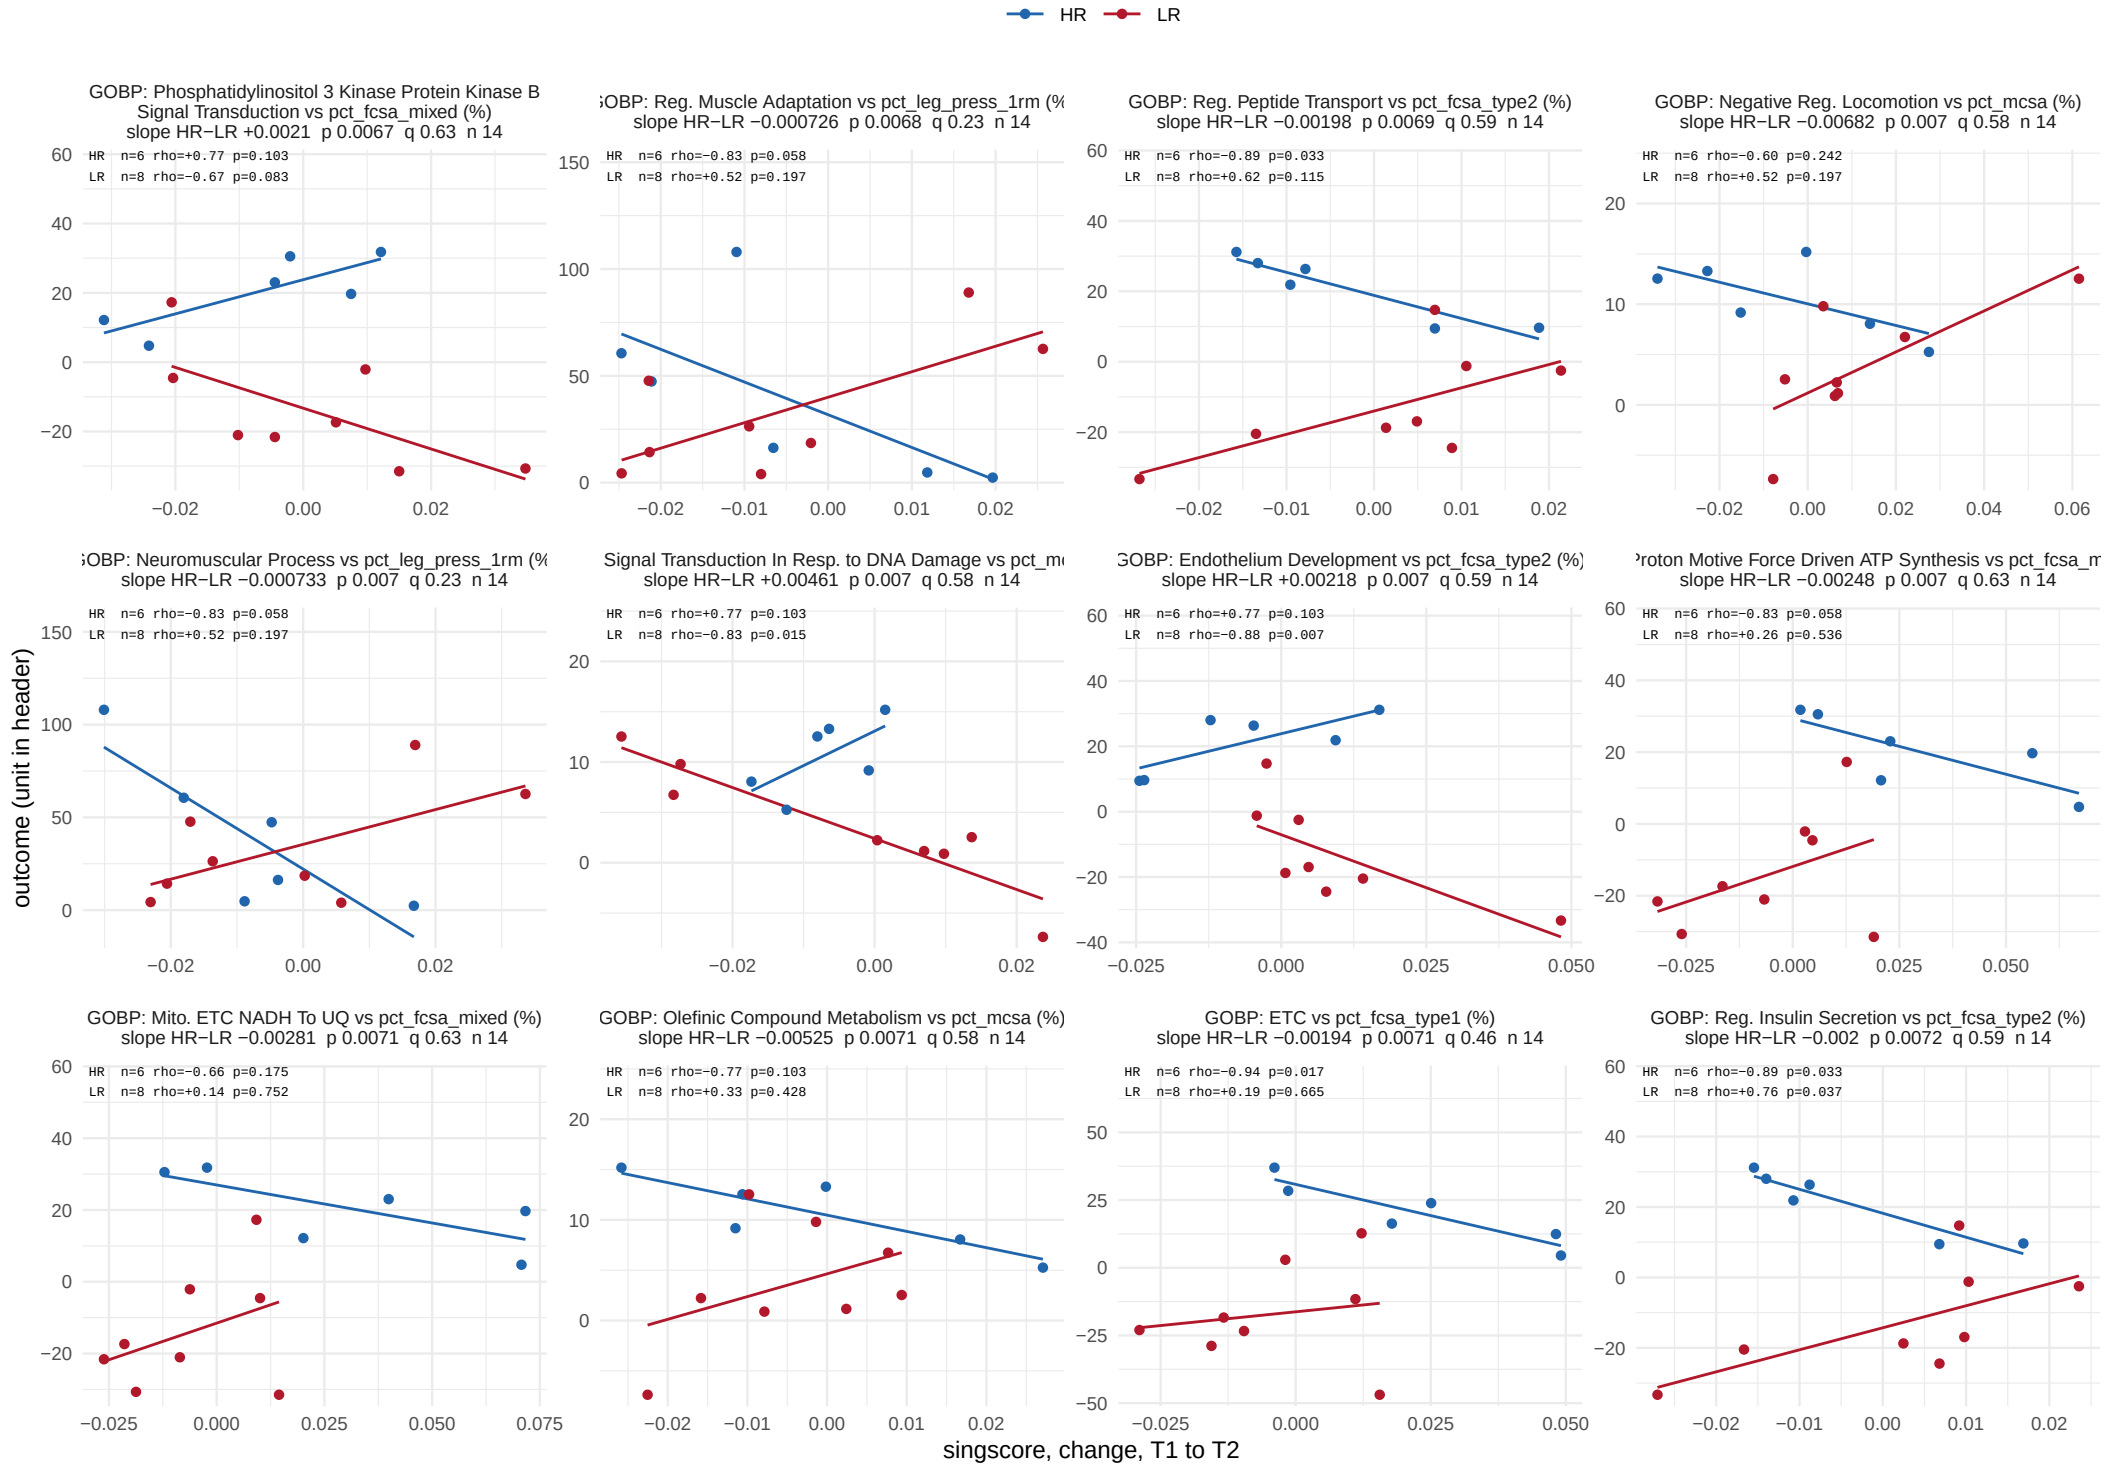

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, training window


604 of 9646 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 9 of 51.

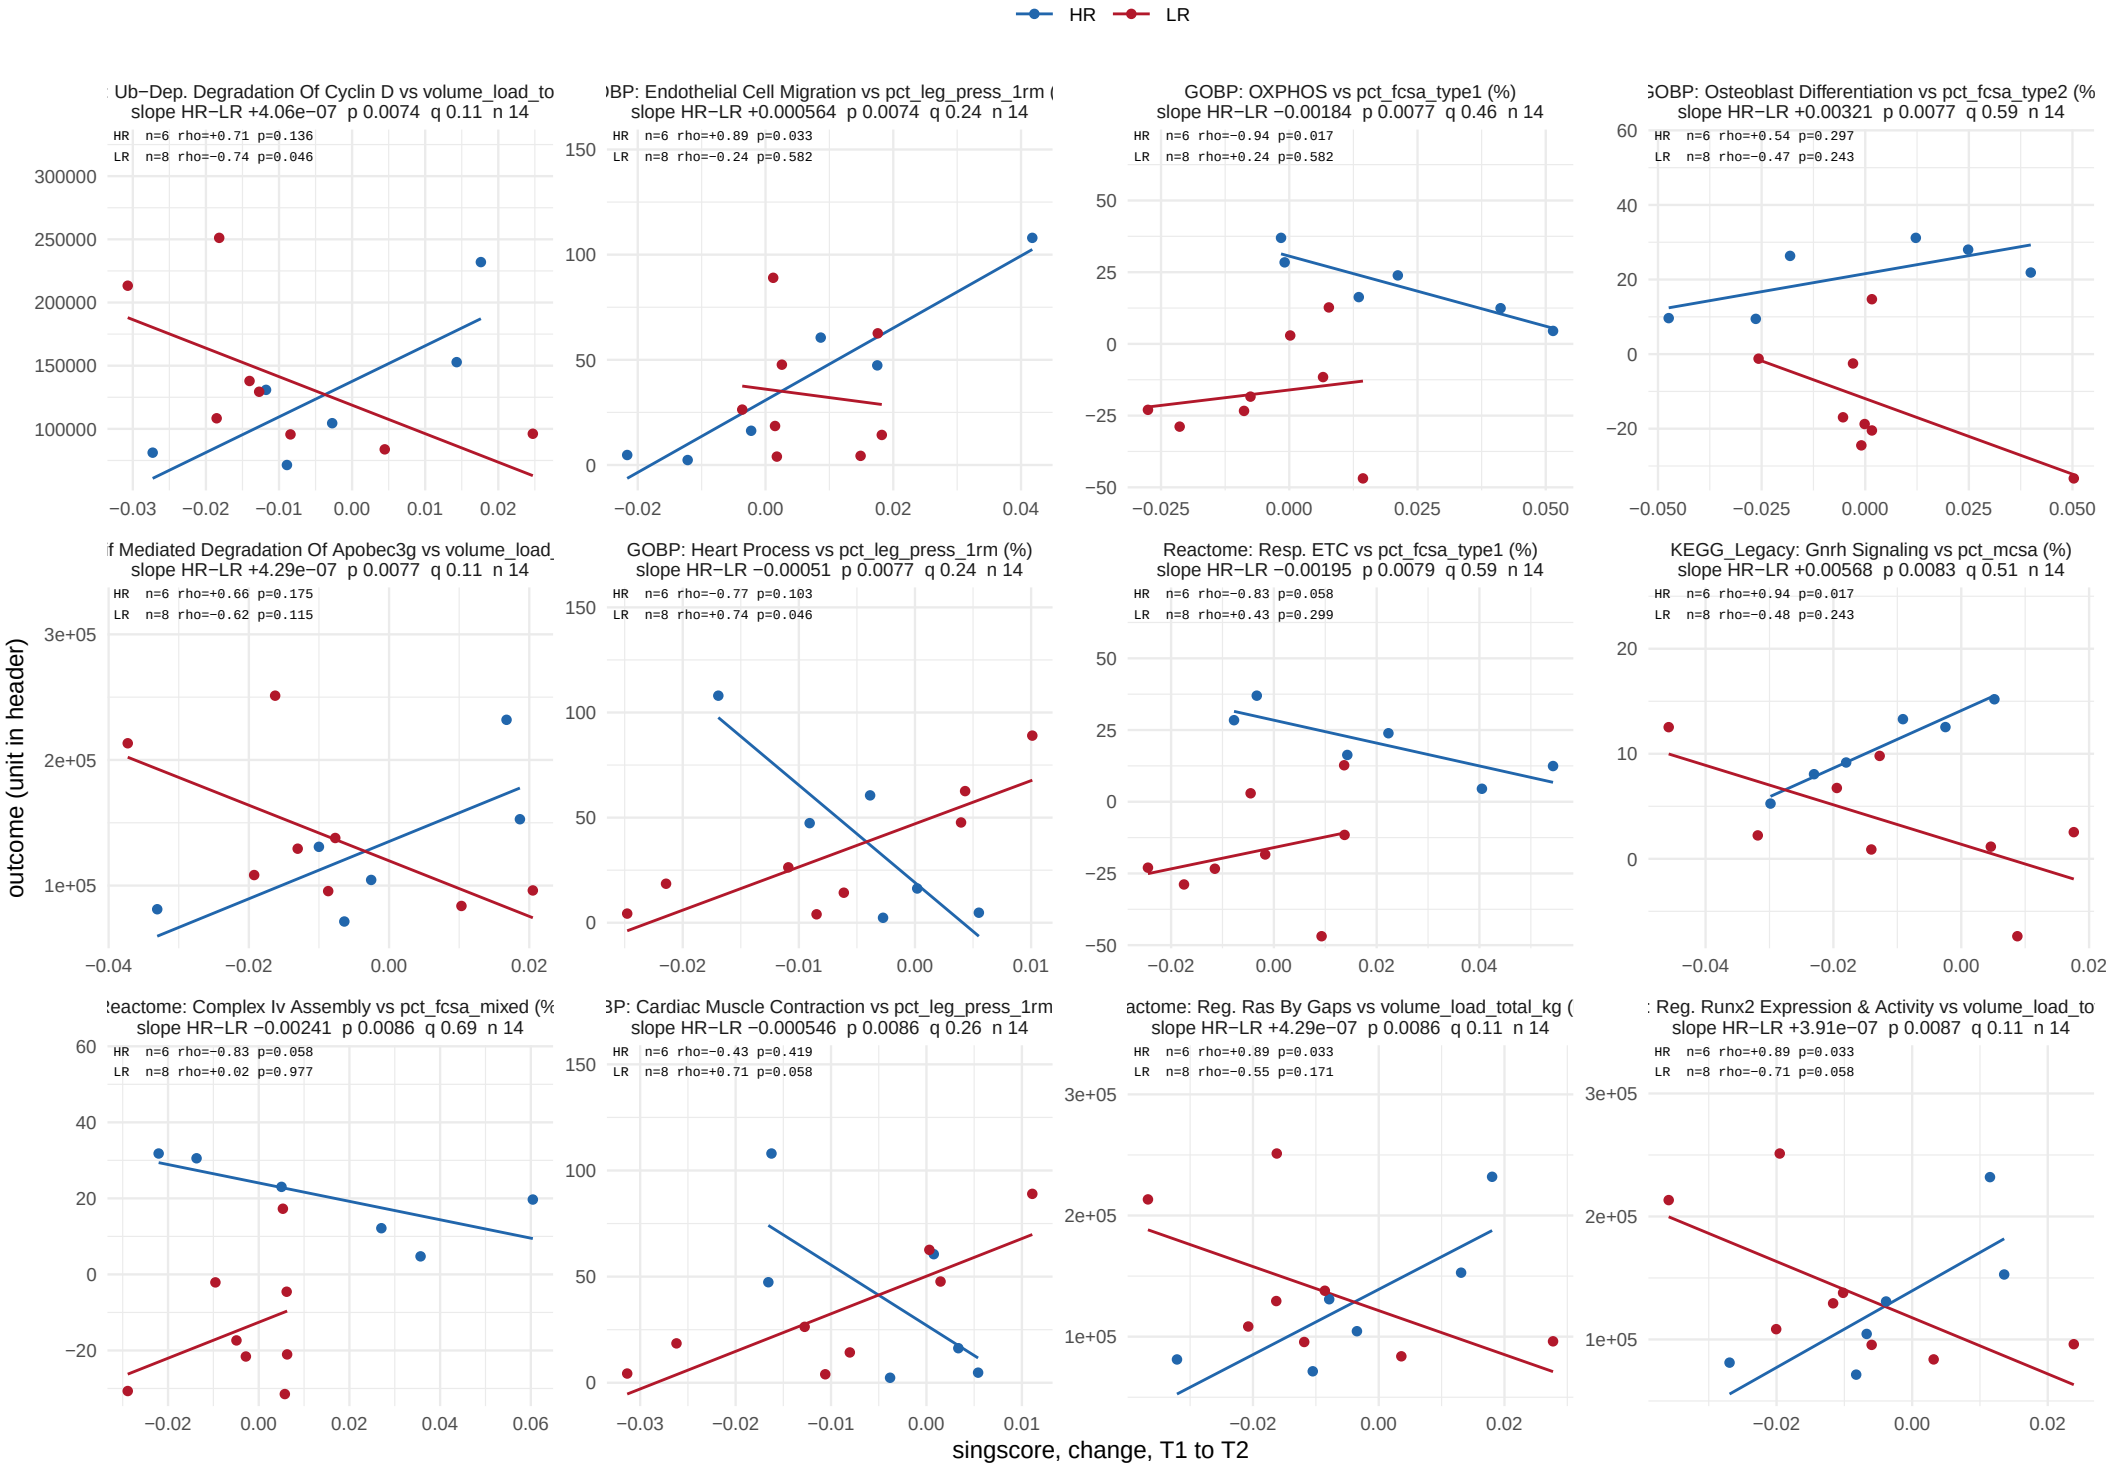

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, training window


604 of 9646 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 10 of 51.

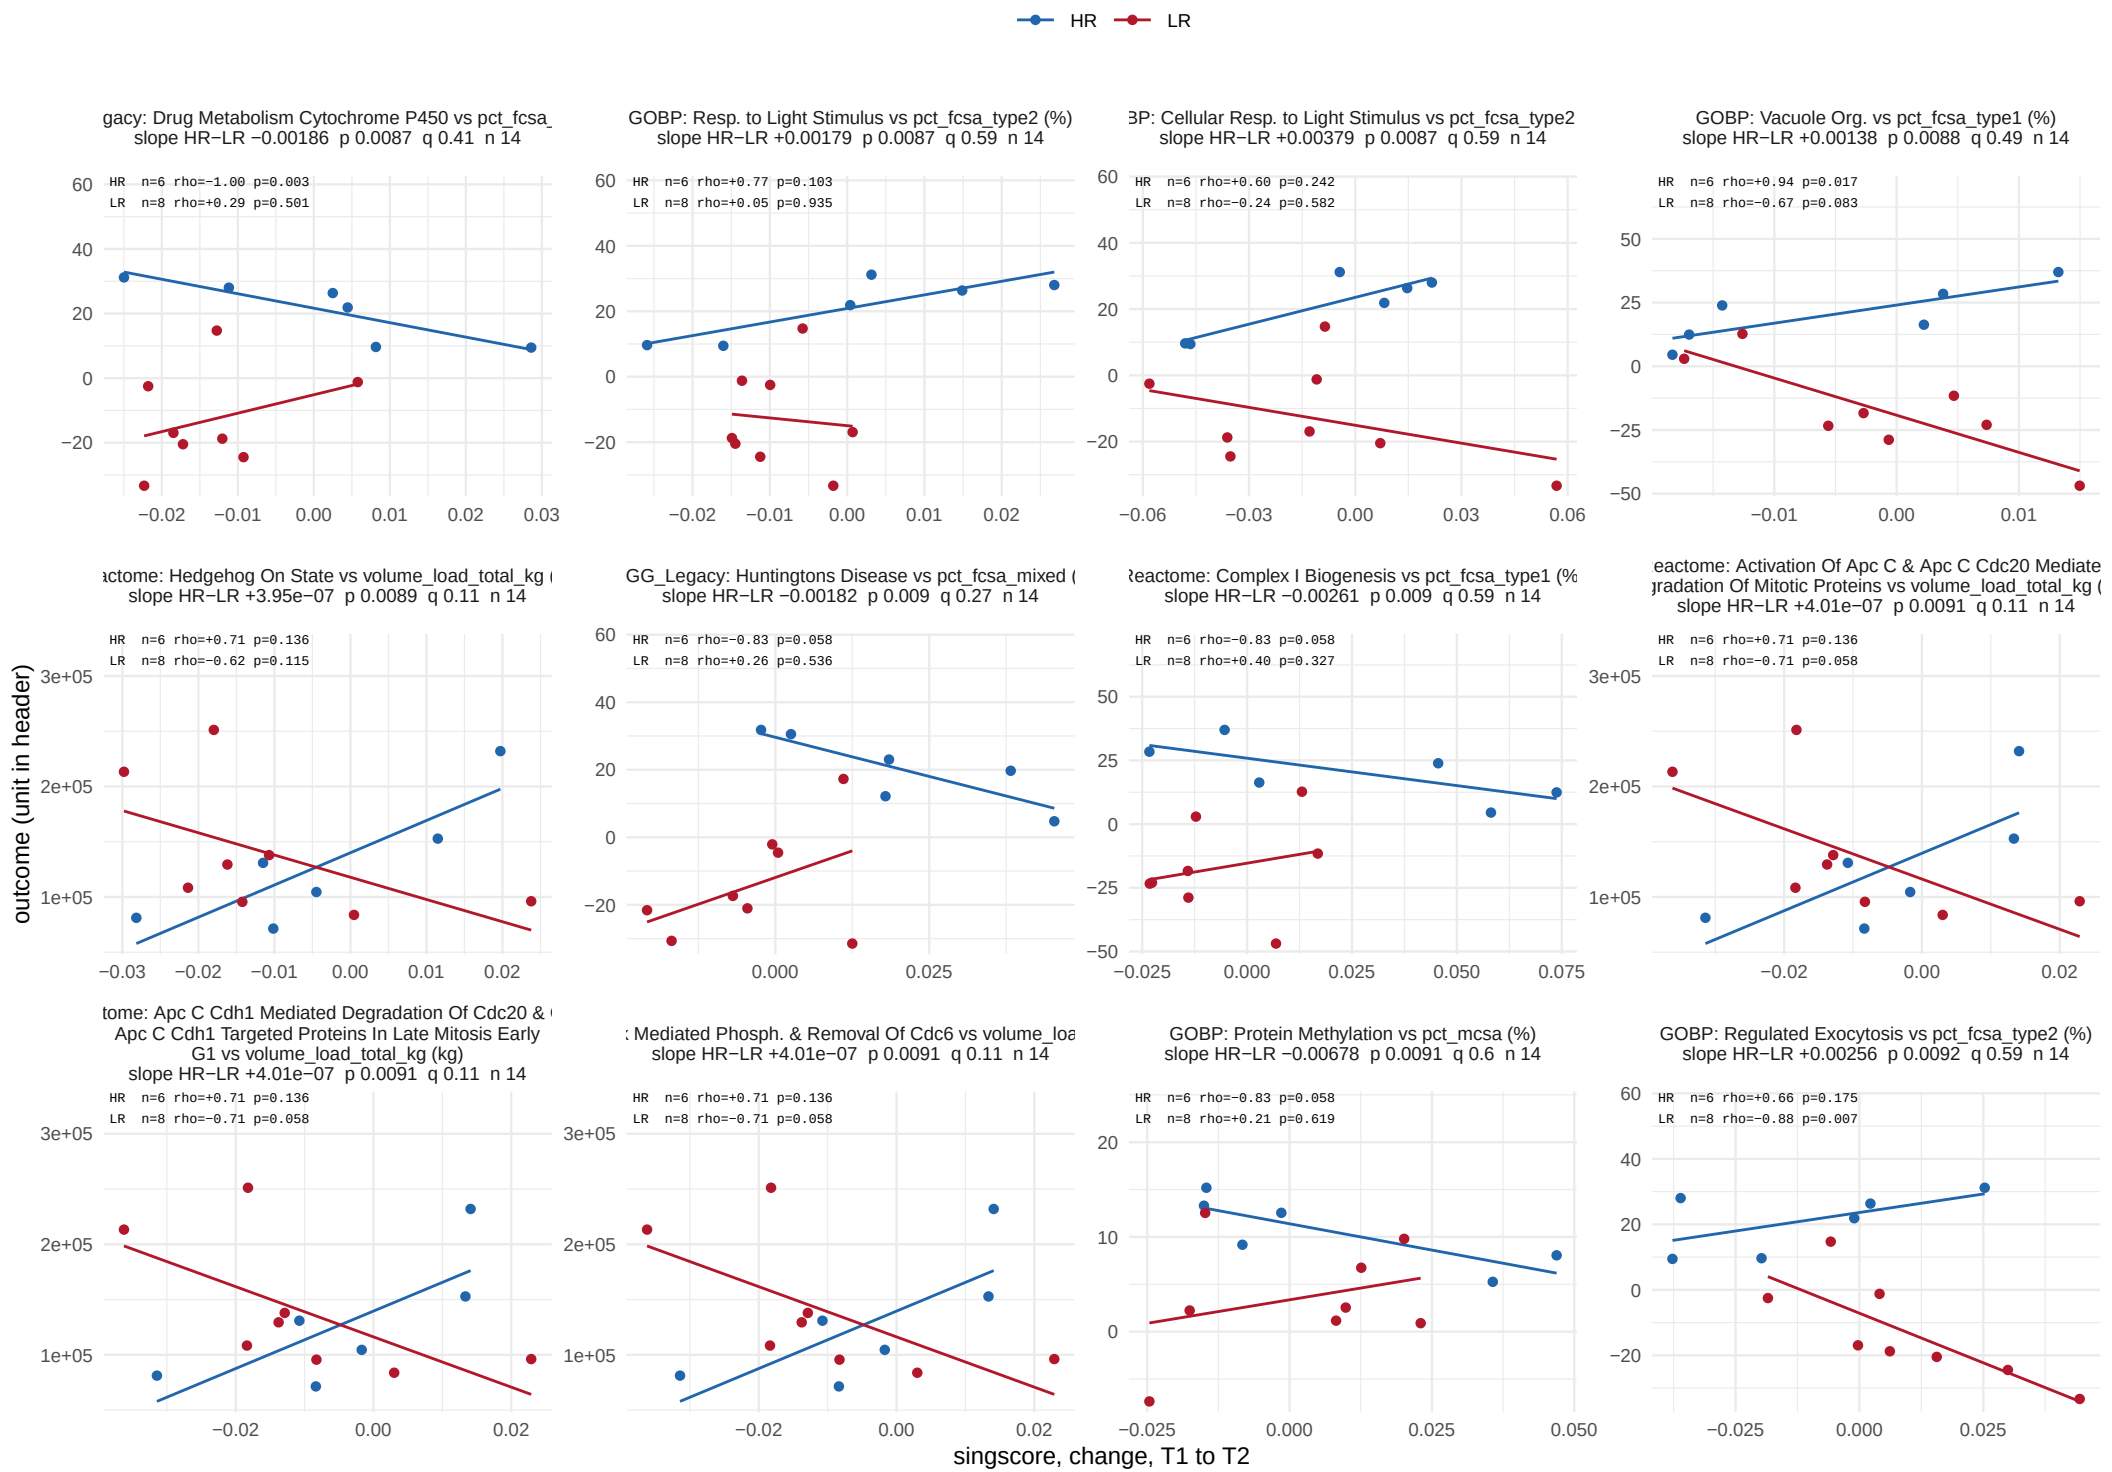

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, training window


604 of 9646 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 11 of 51.

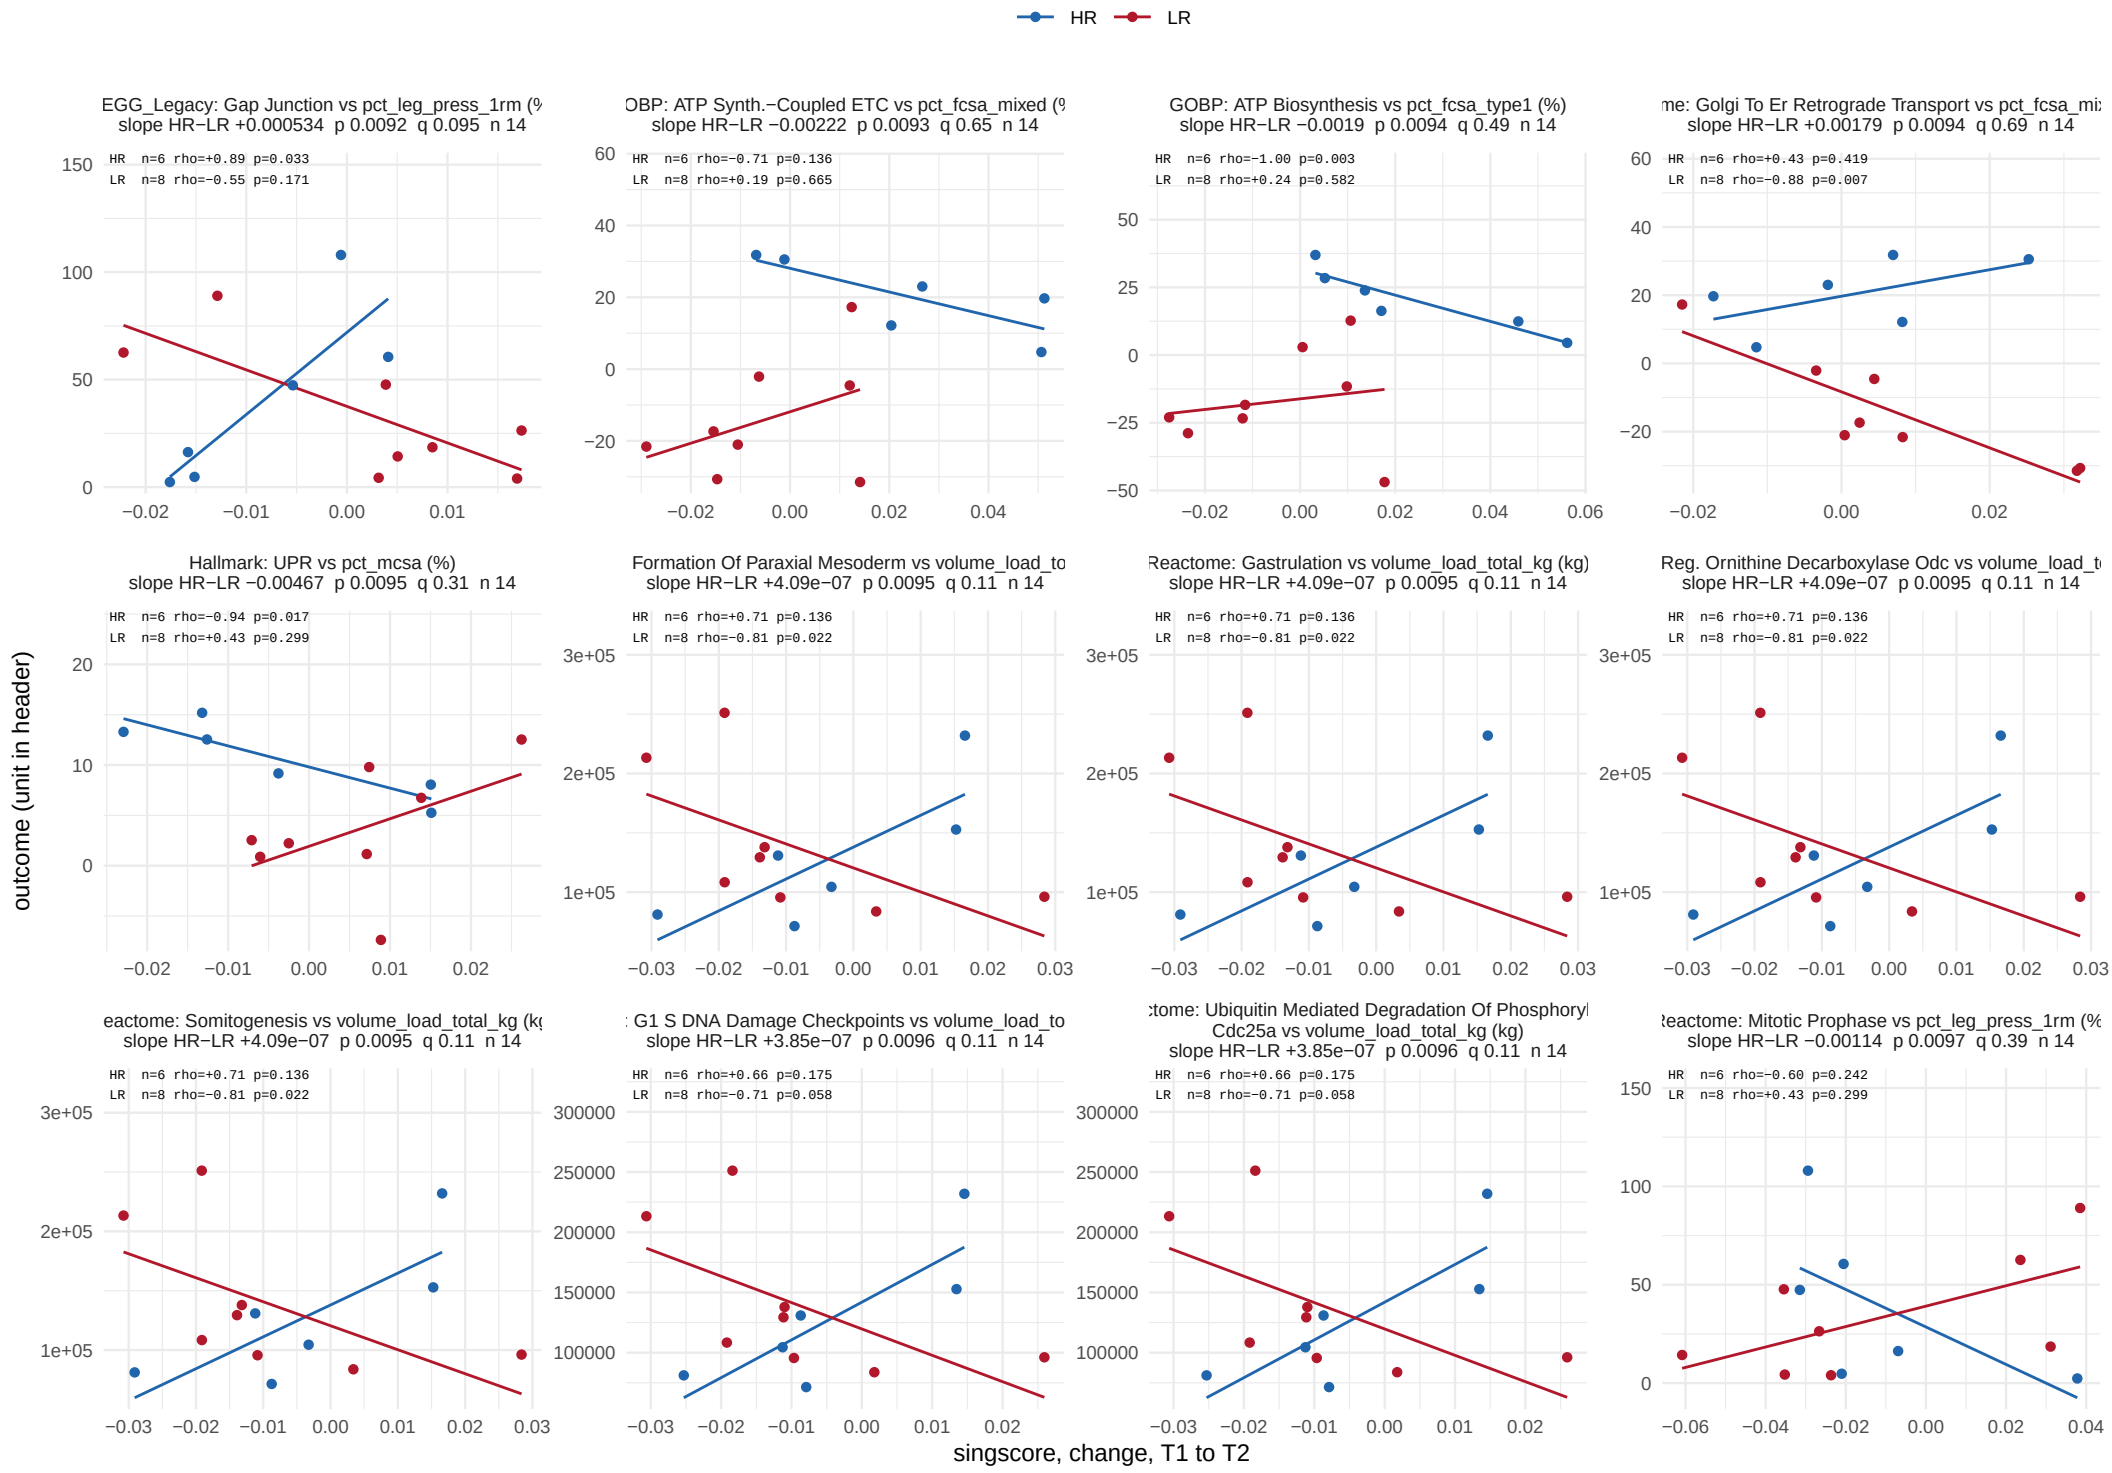

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, training window


604 of 9646 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 12 of 51.

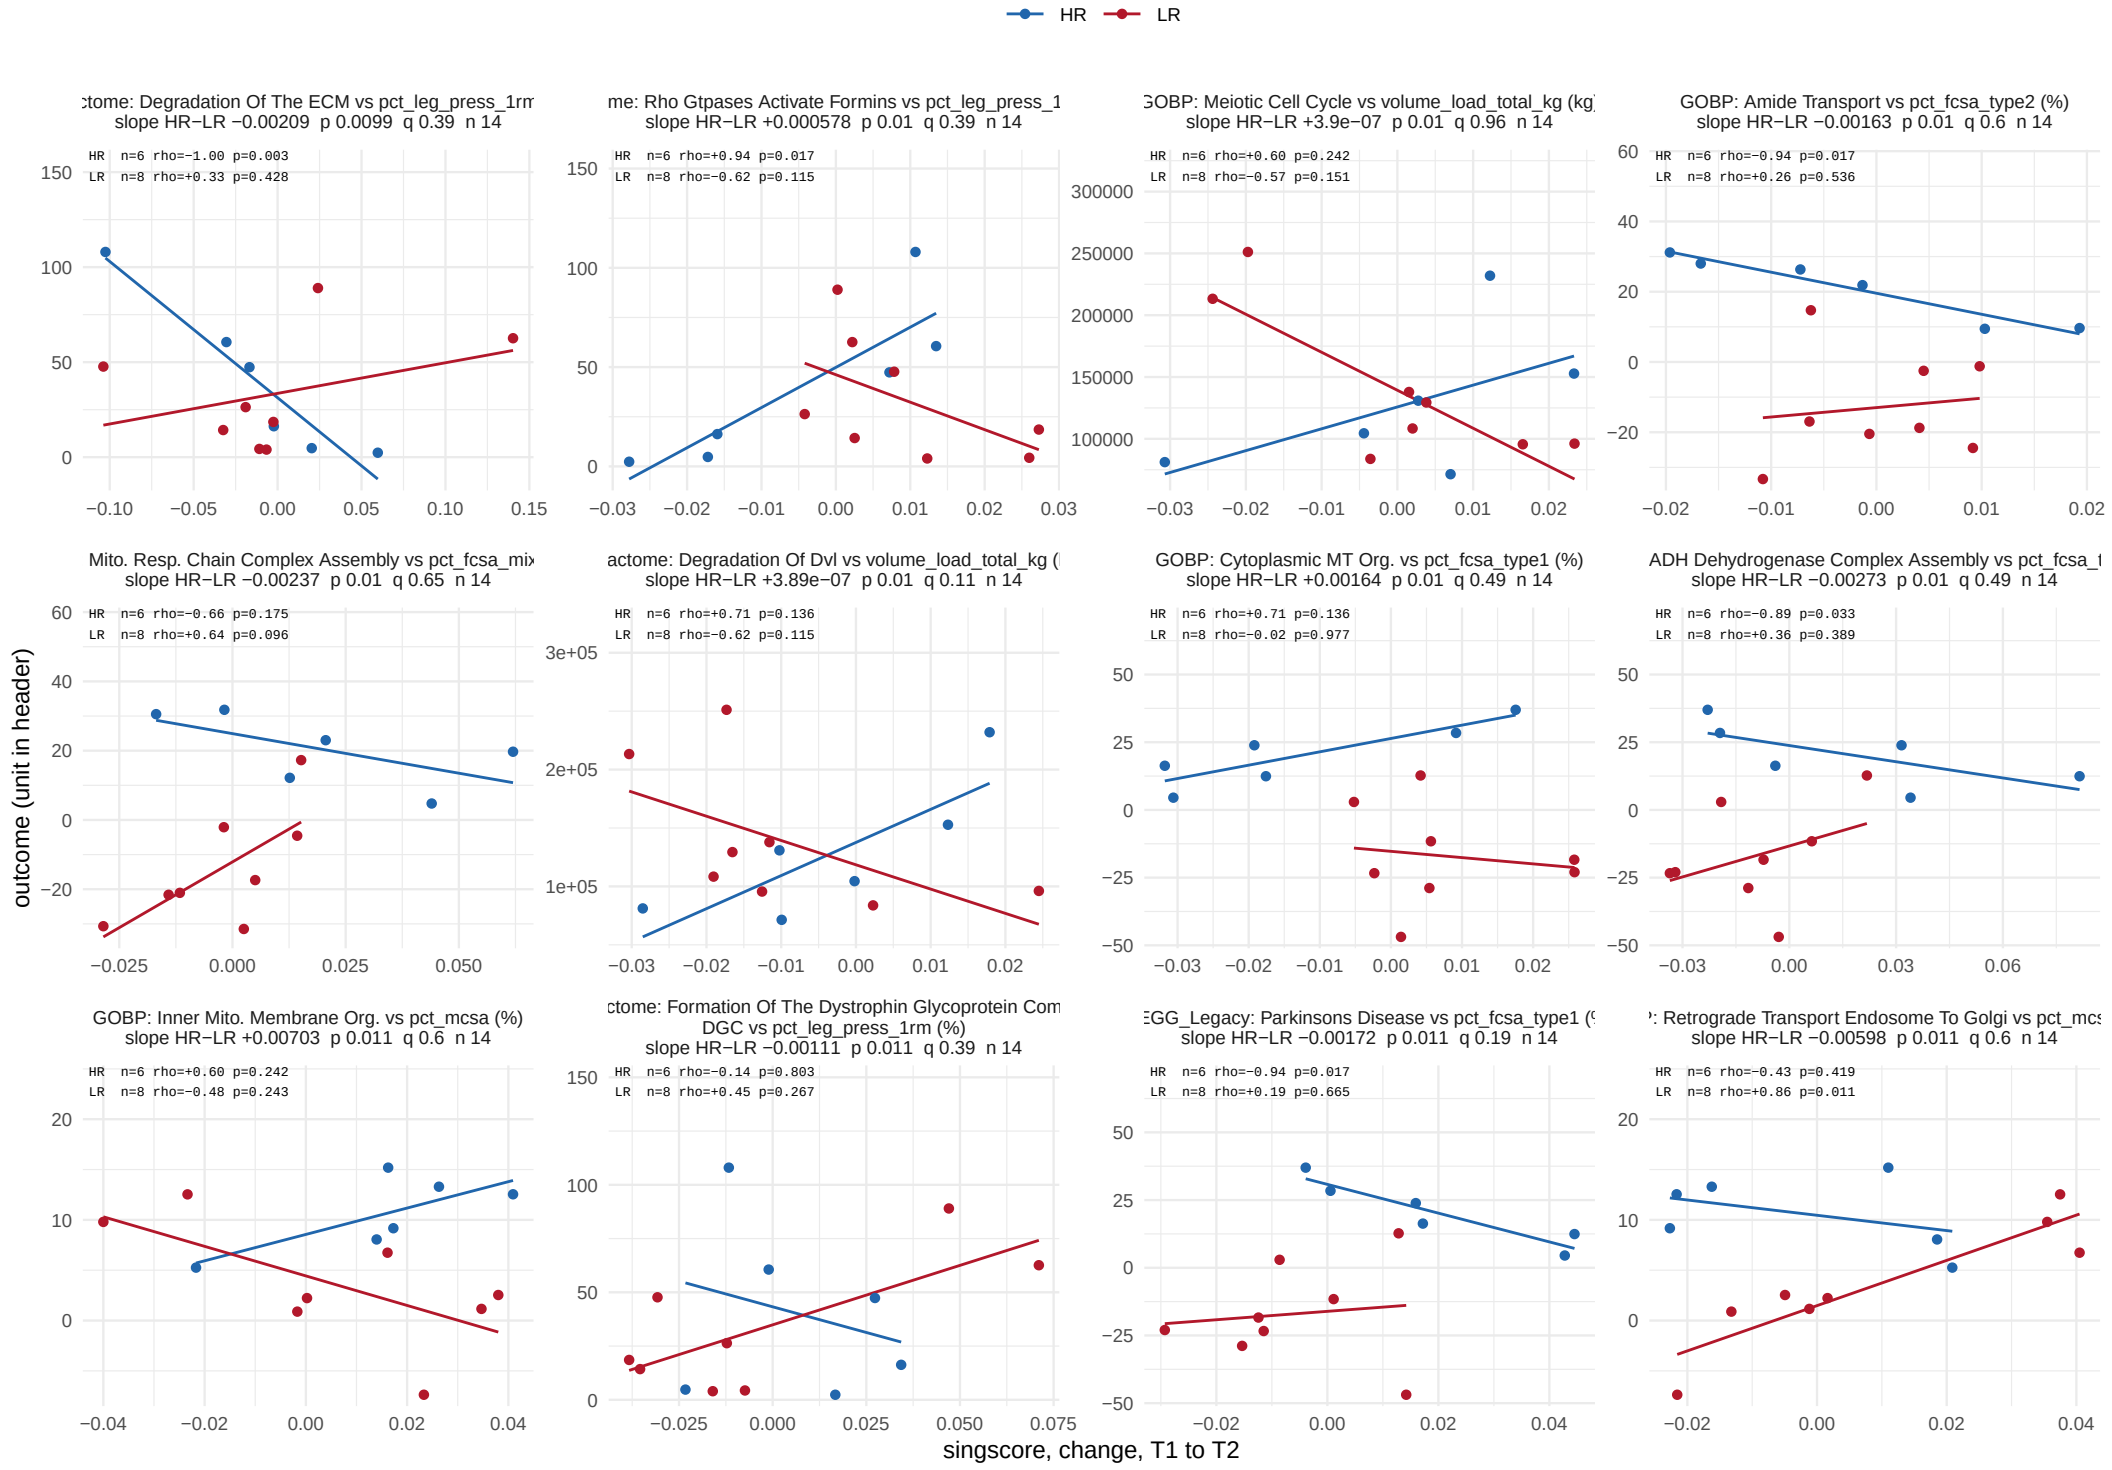

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, training window


604 of 9646 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 13 of 51.

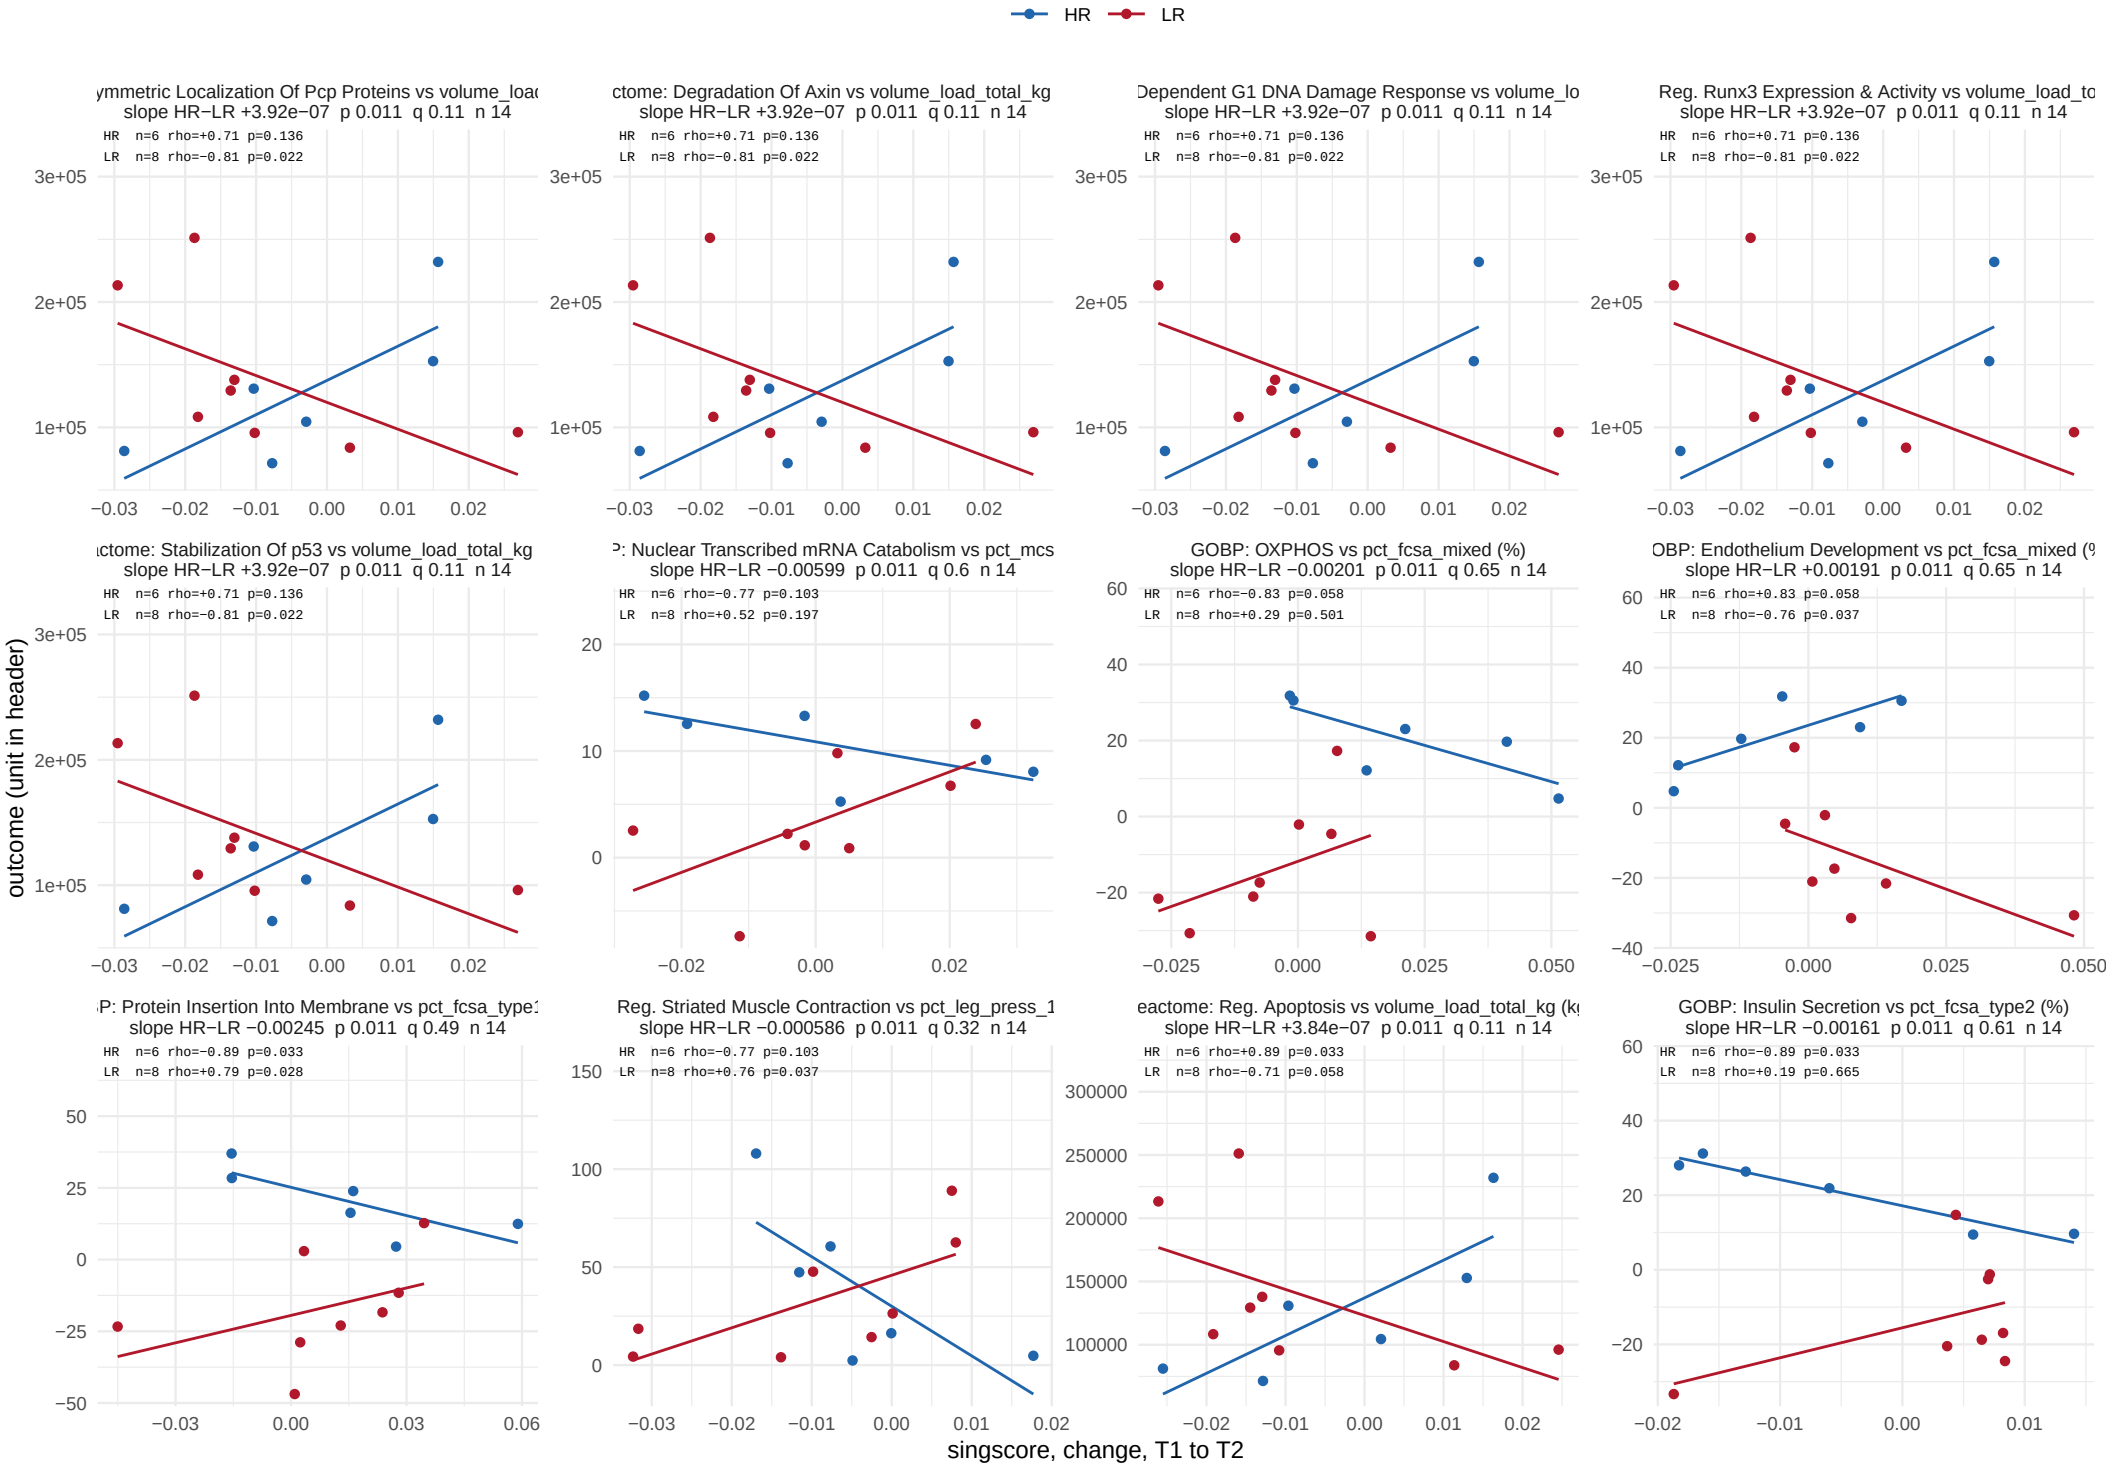

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, training window


604 of 9646 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 14 of 51.

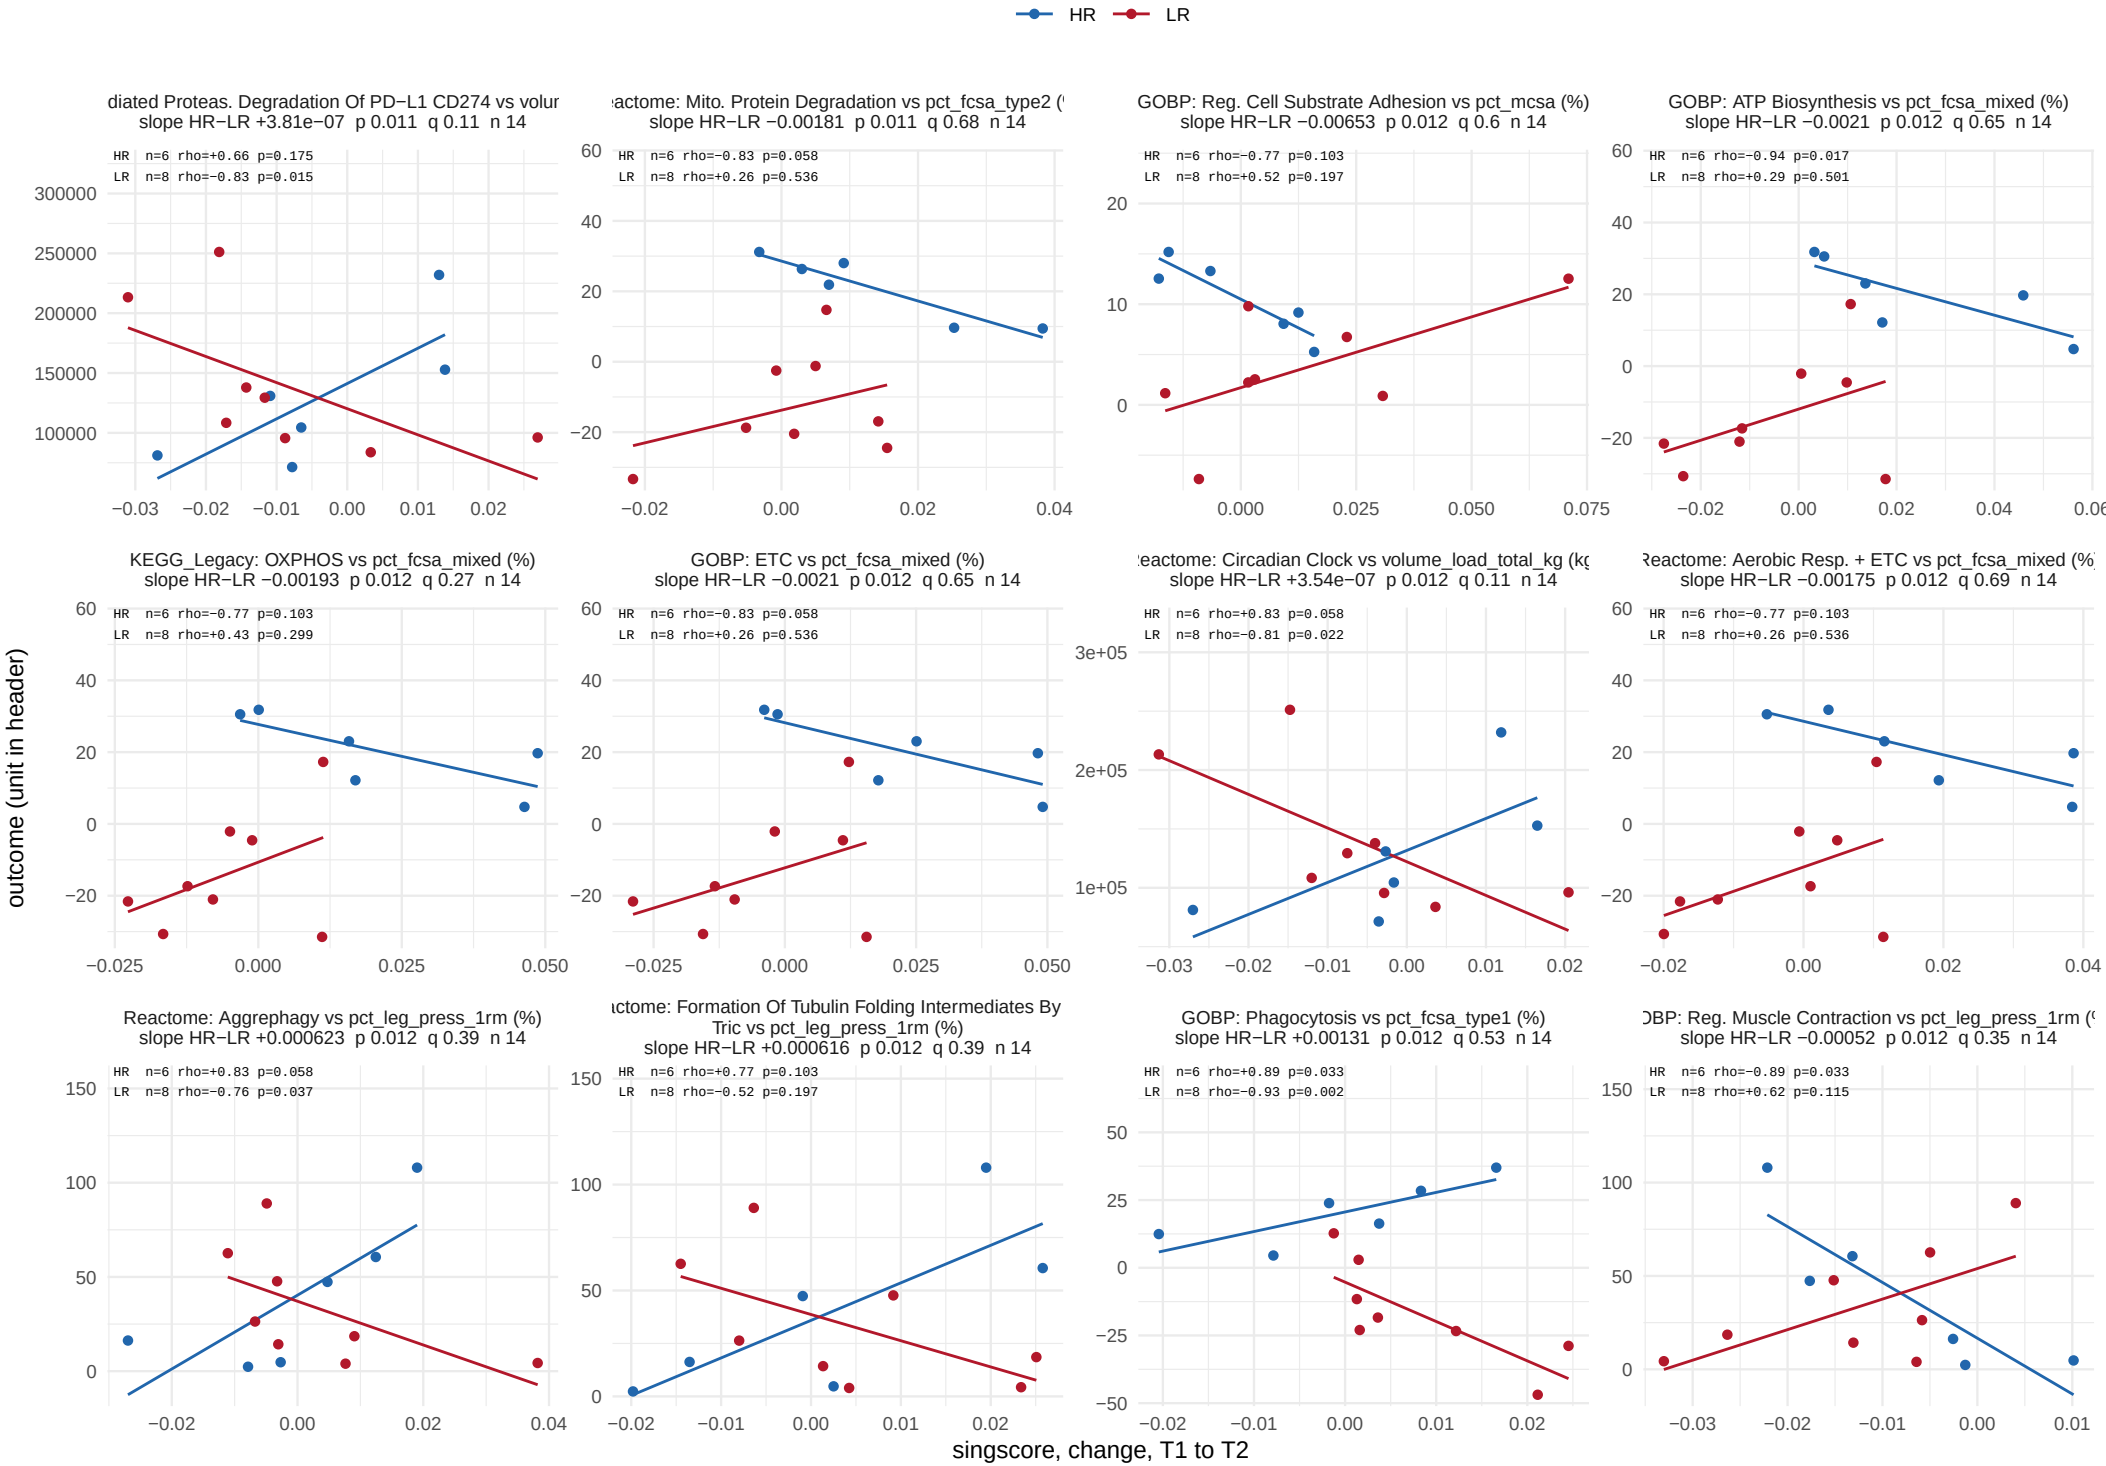

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, training window


604 of 9646 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 15 of 51.

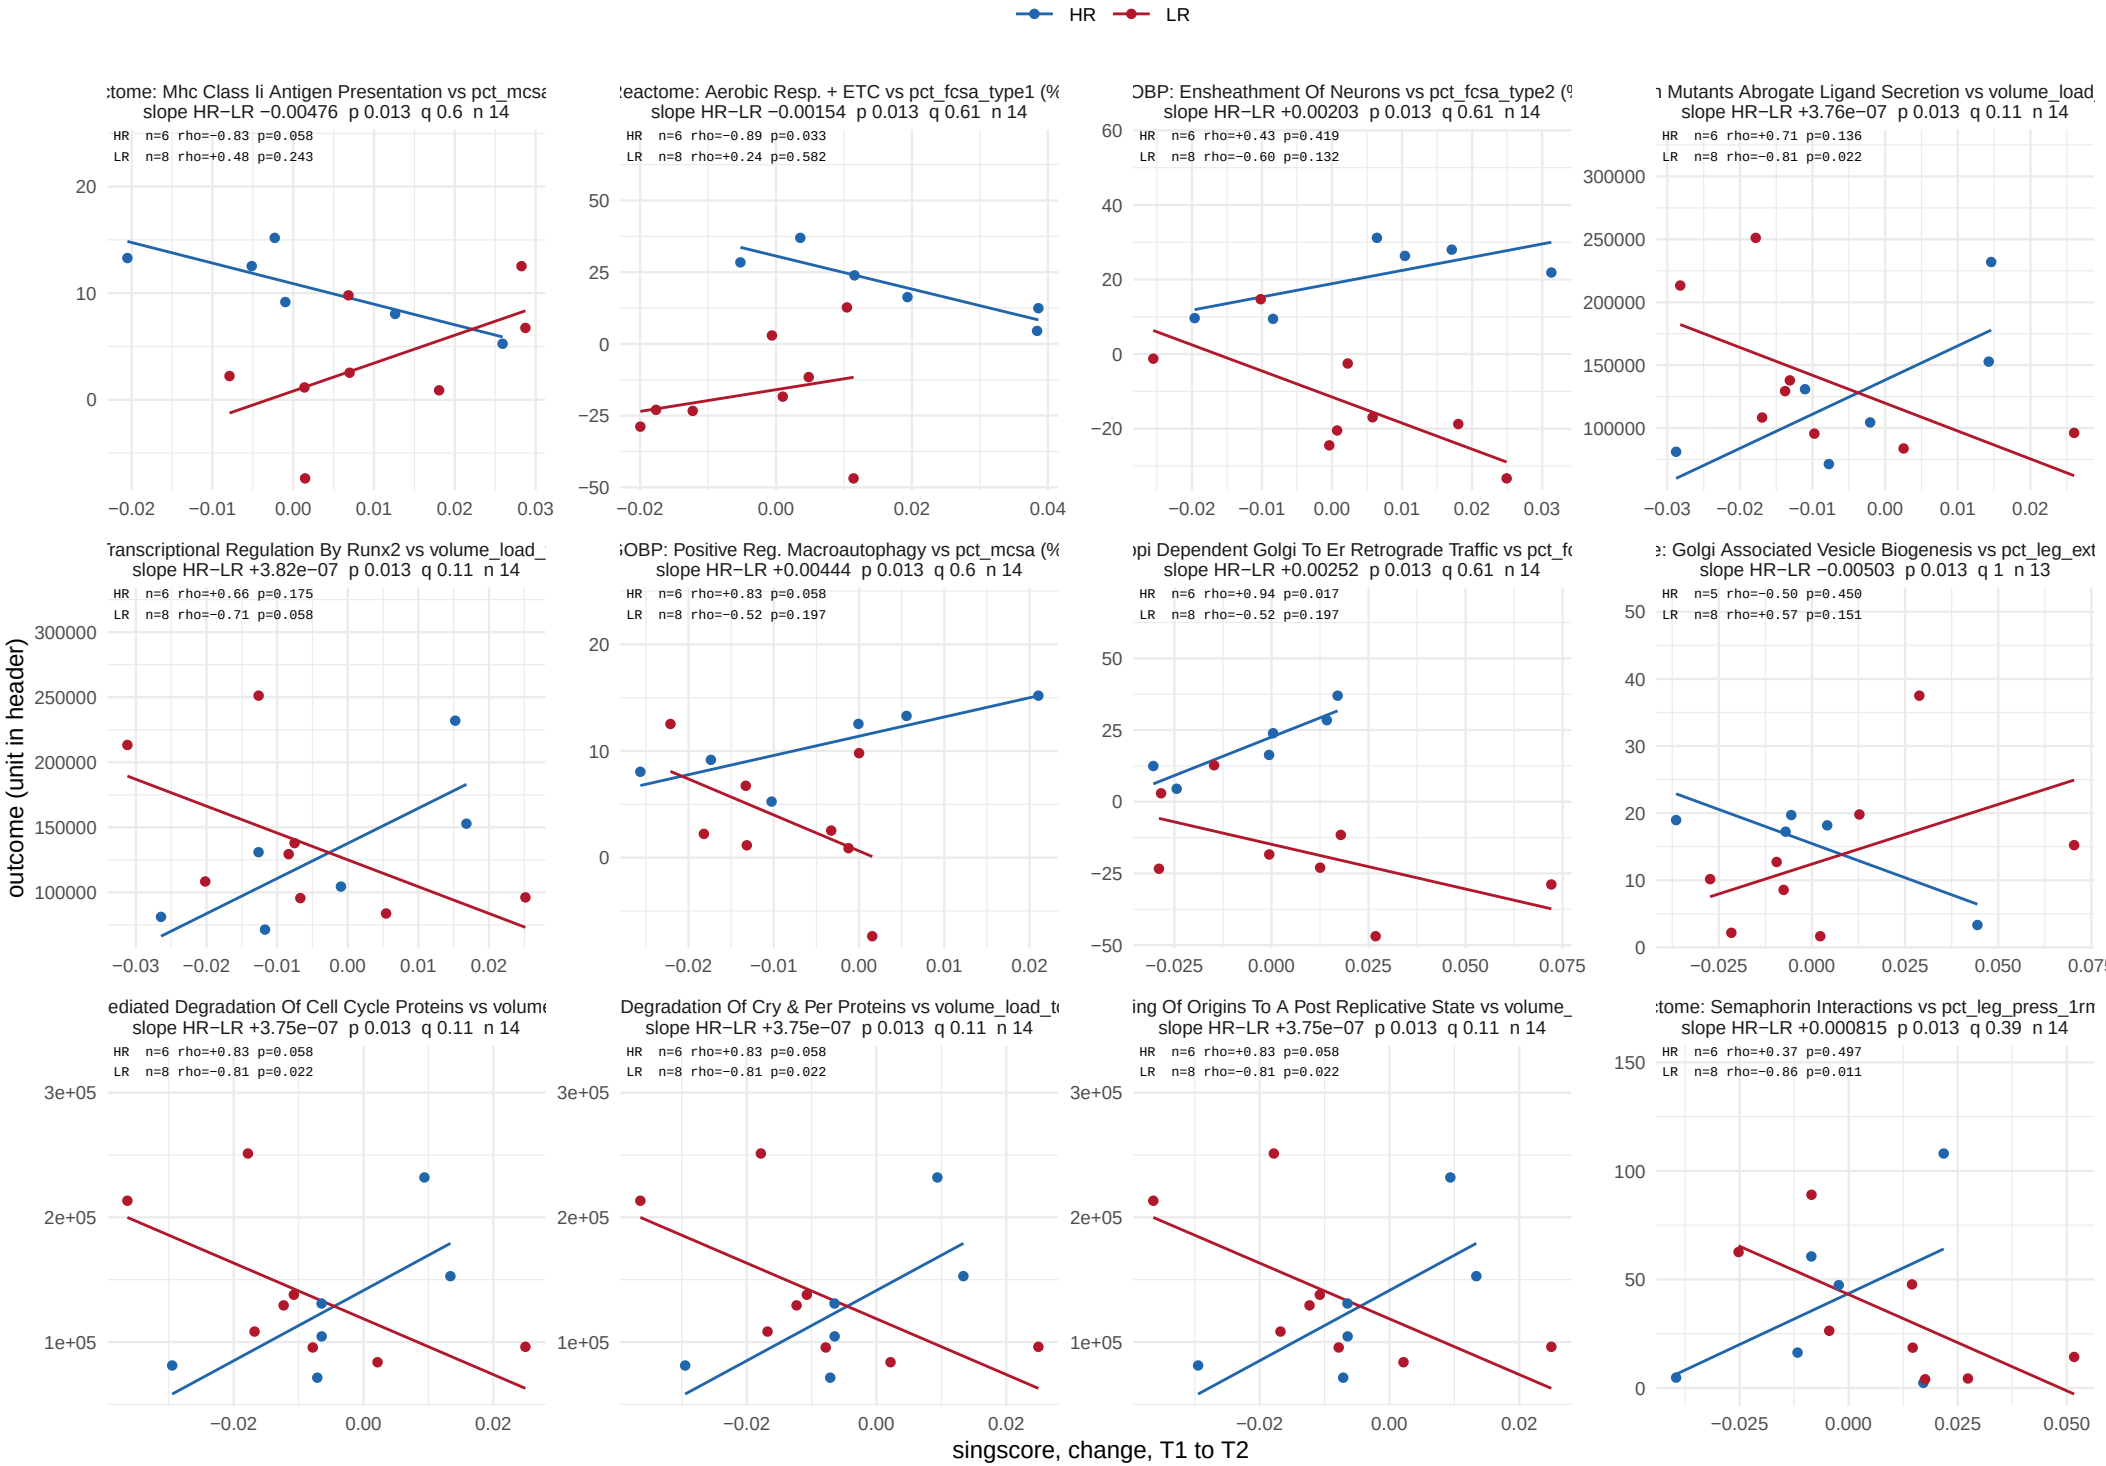

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, training window


604 of 9646 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 16 of 51.

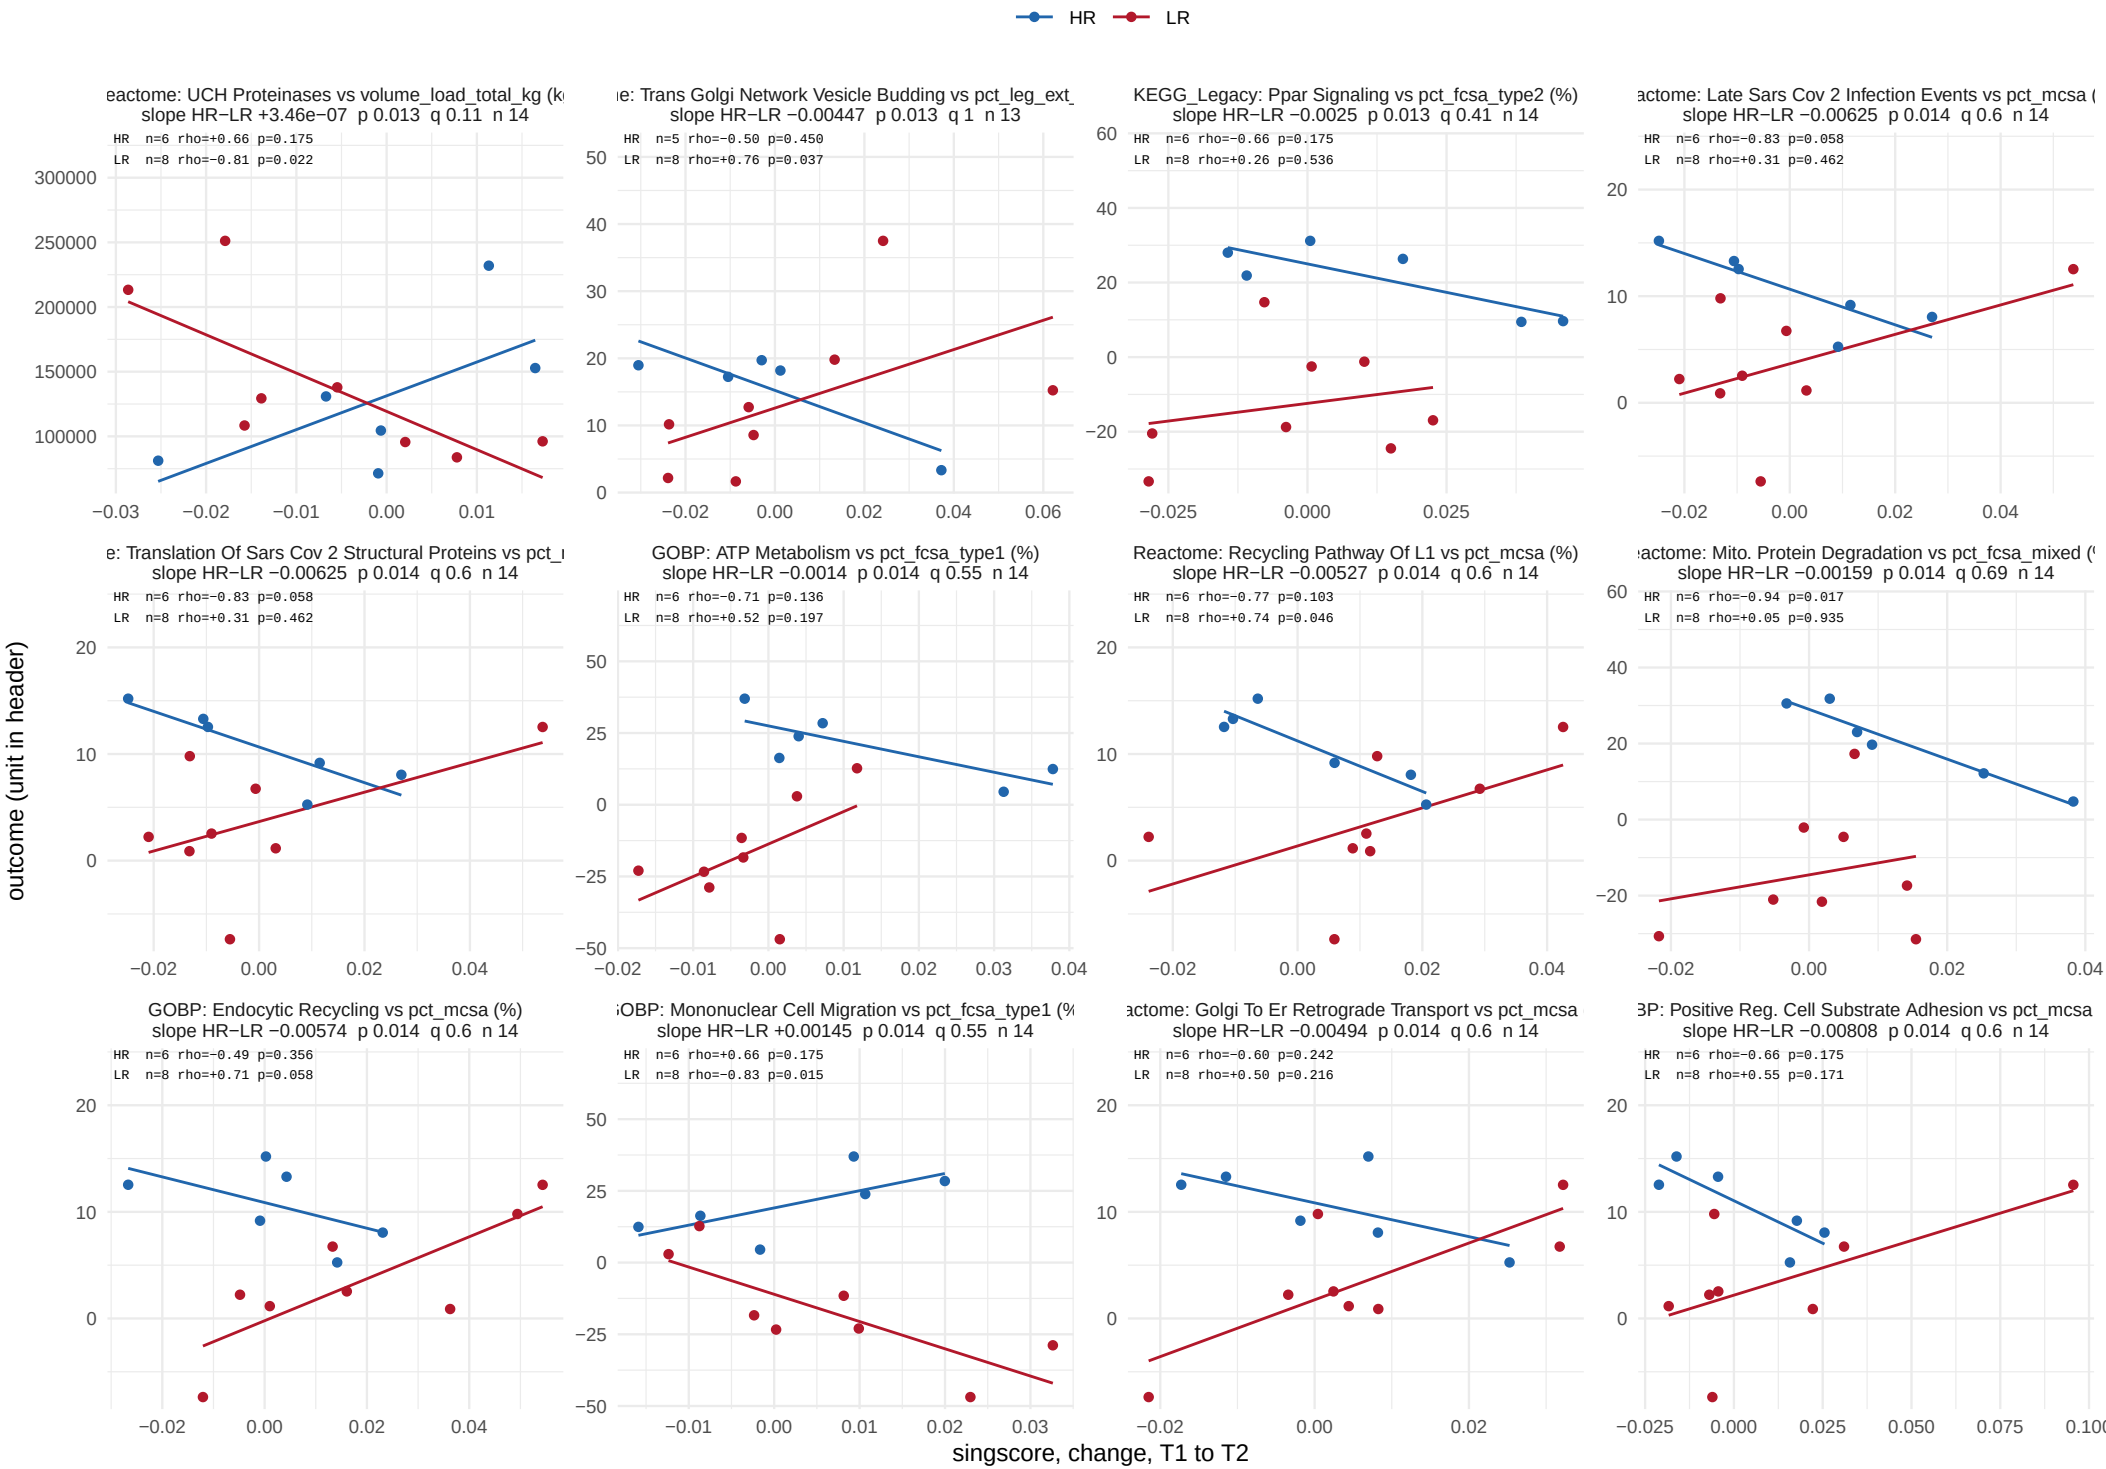

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, training window


604 of 9646 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 17 of 51.

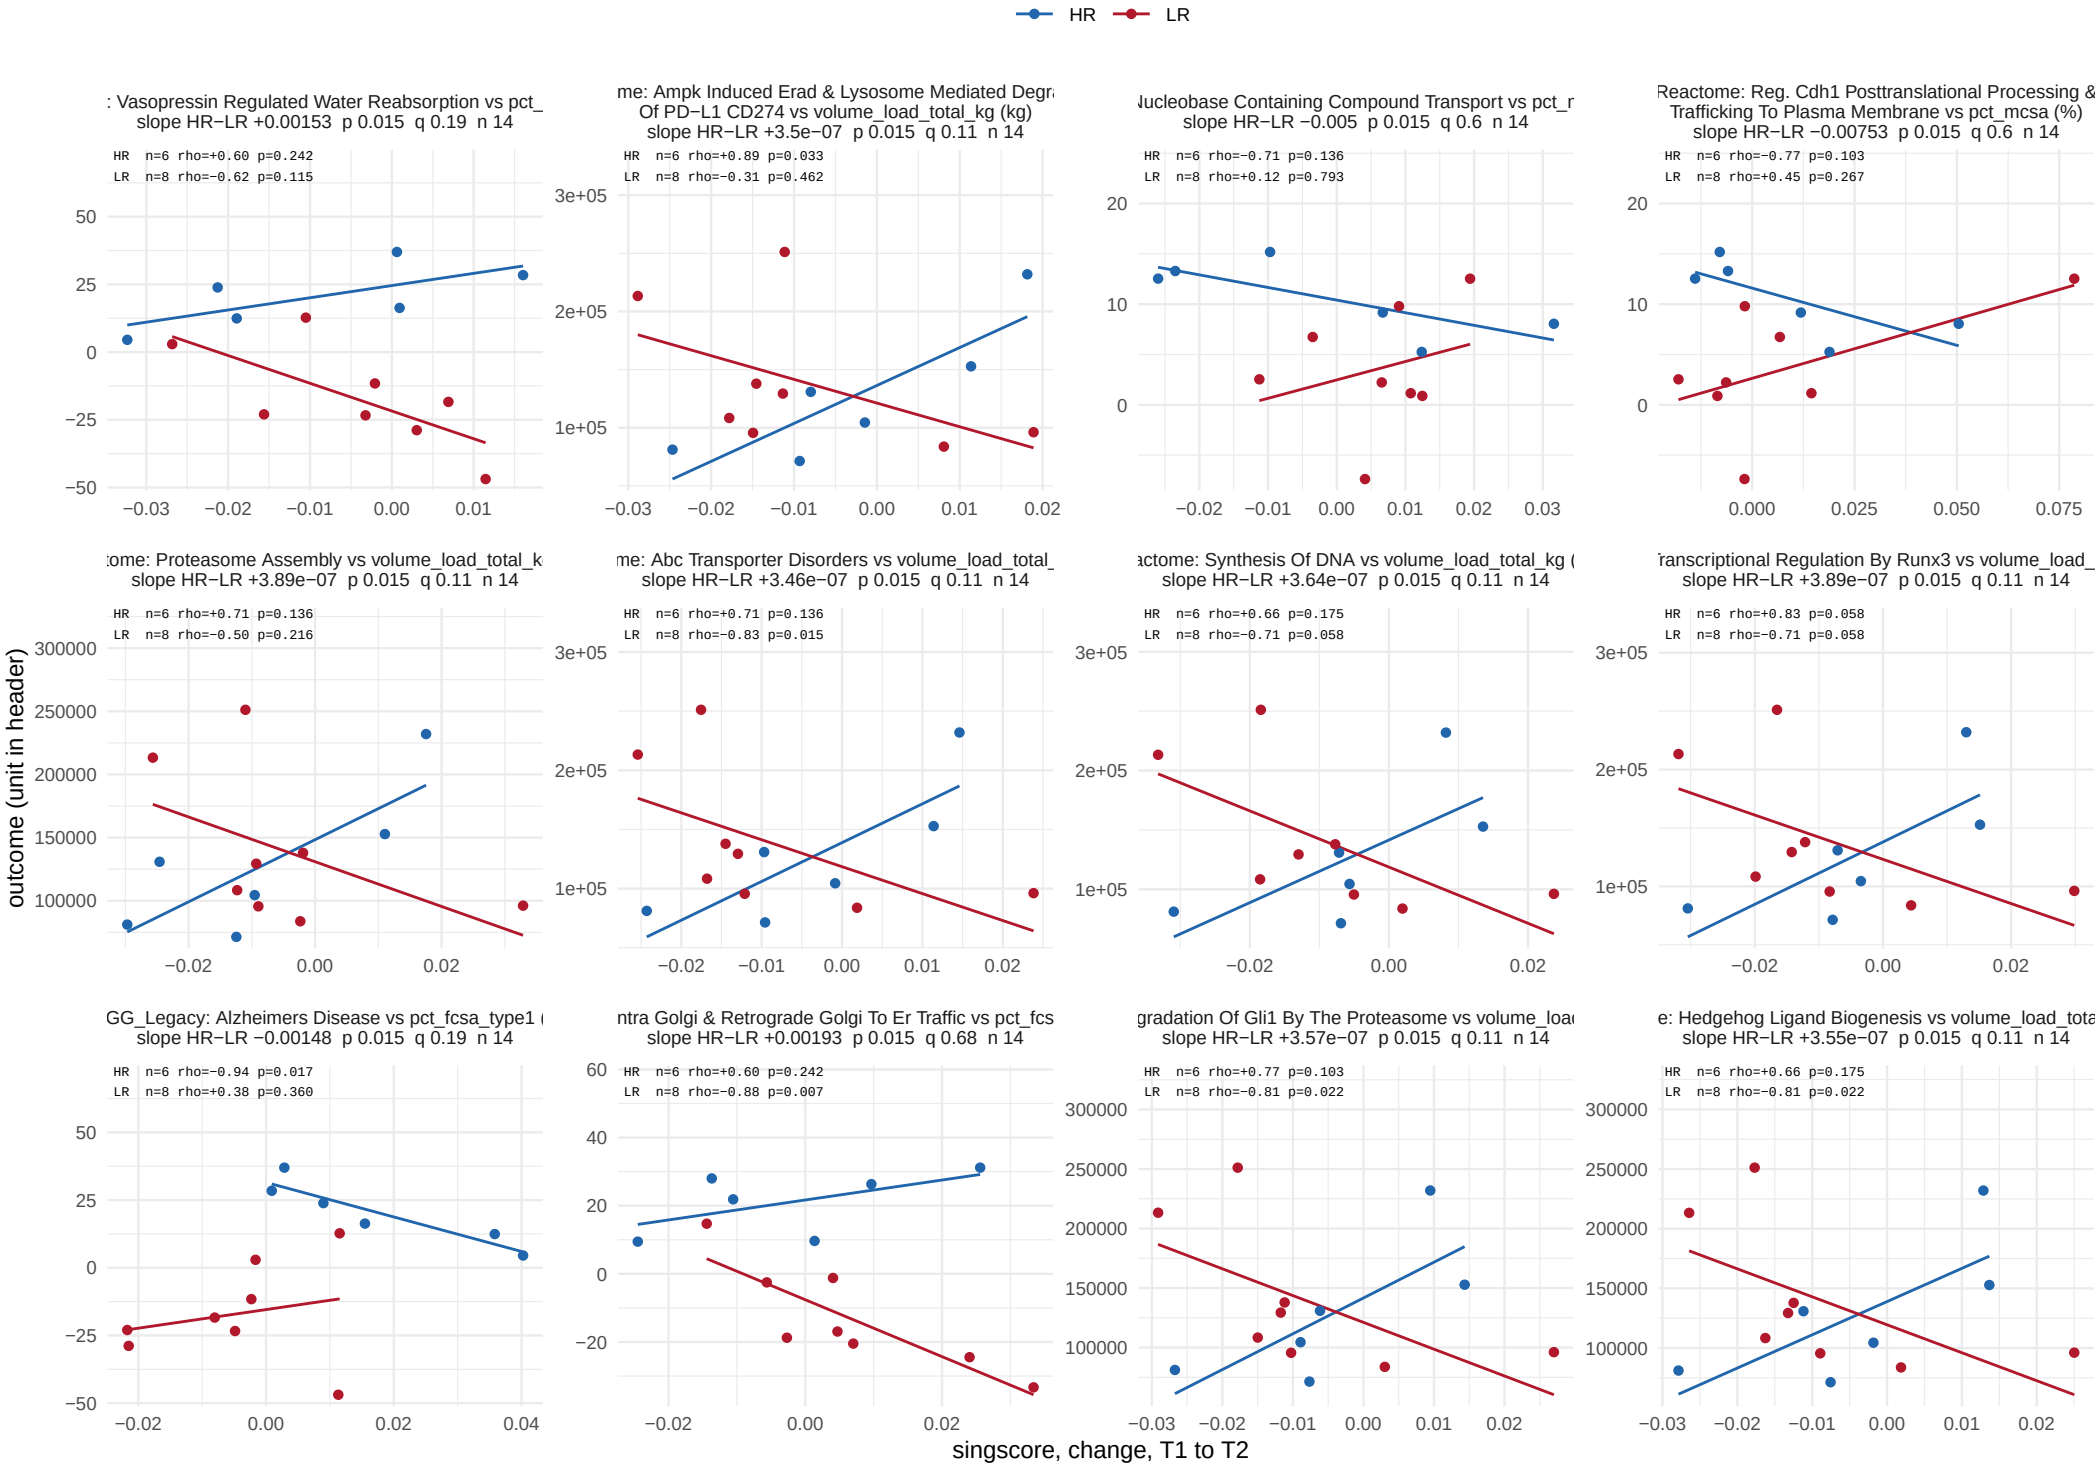

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, training window


604 of 9646 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 18 of 51.

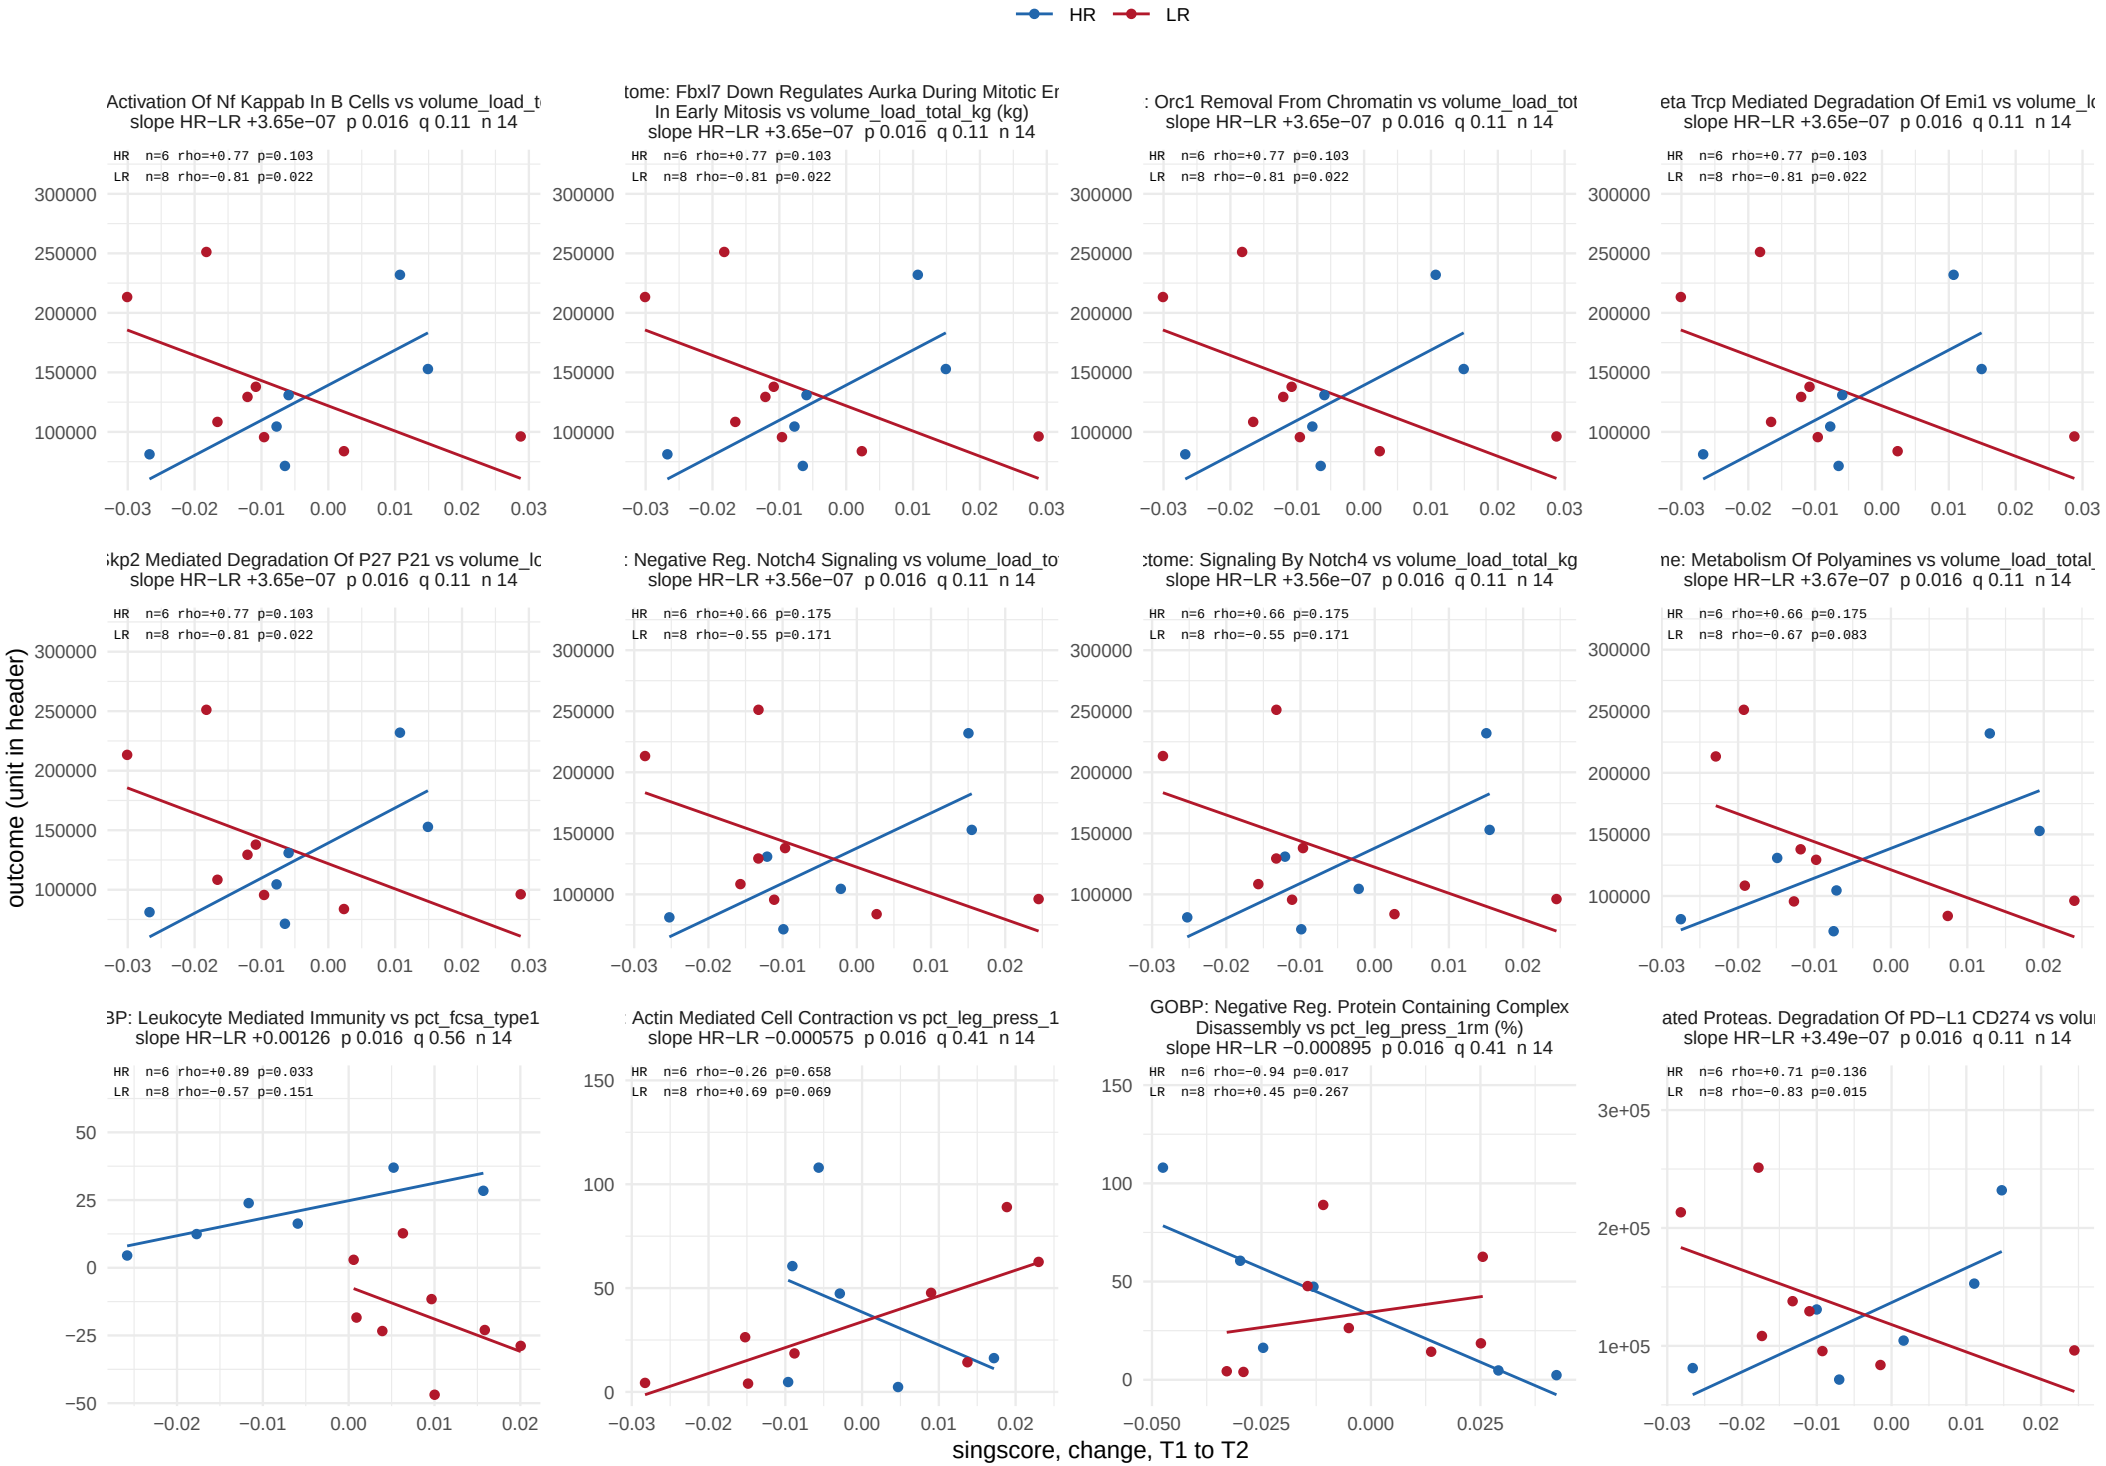

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, training window


604 of 9646 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 19 of 51.

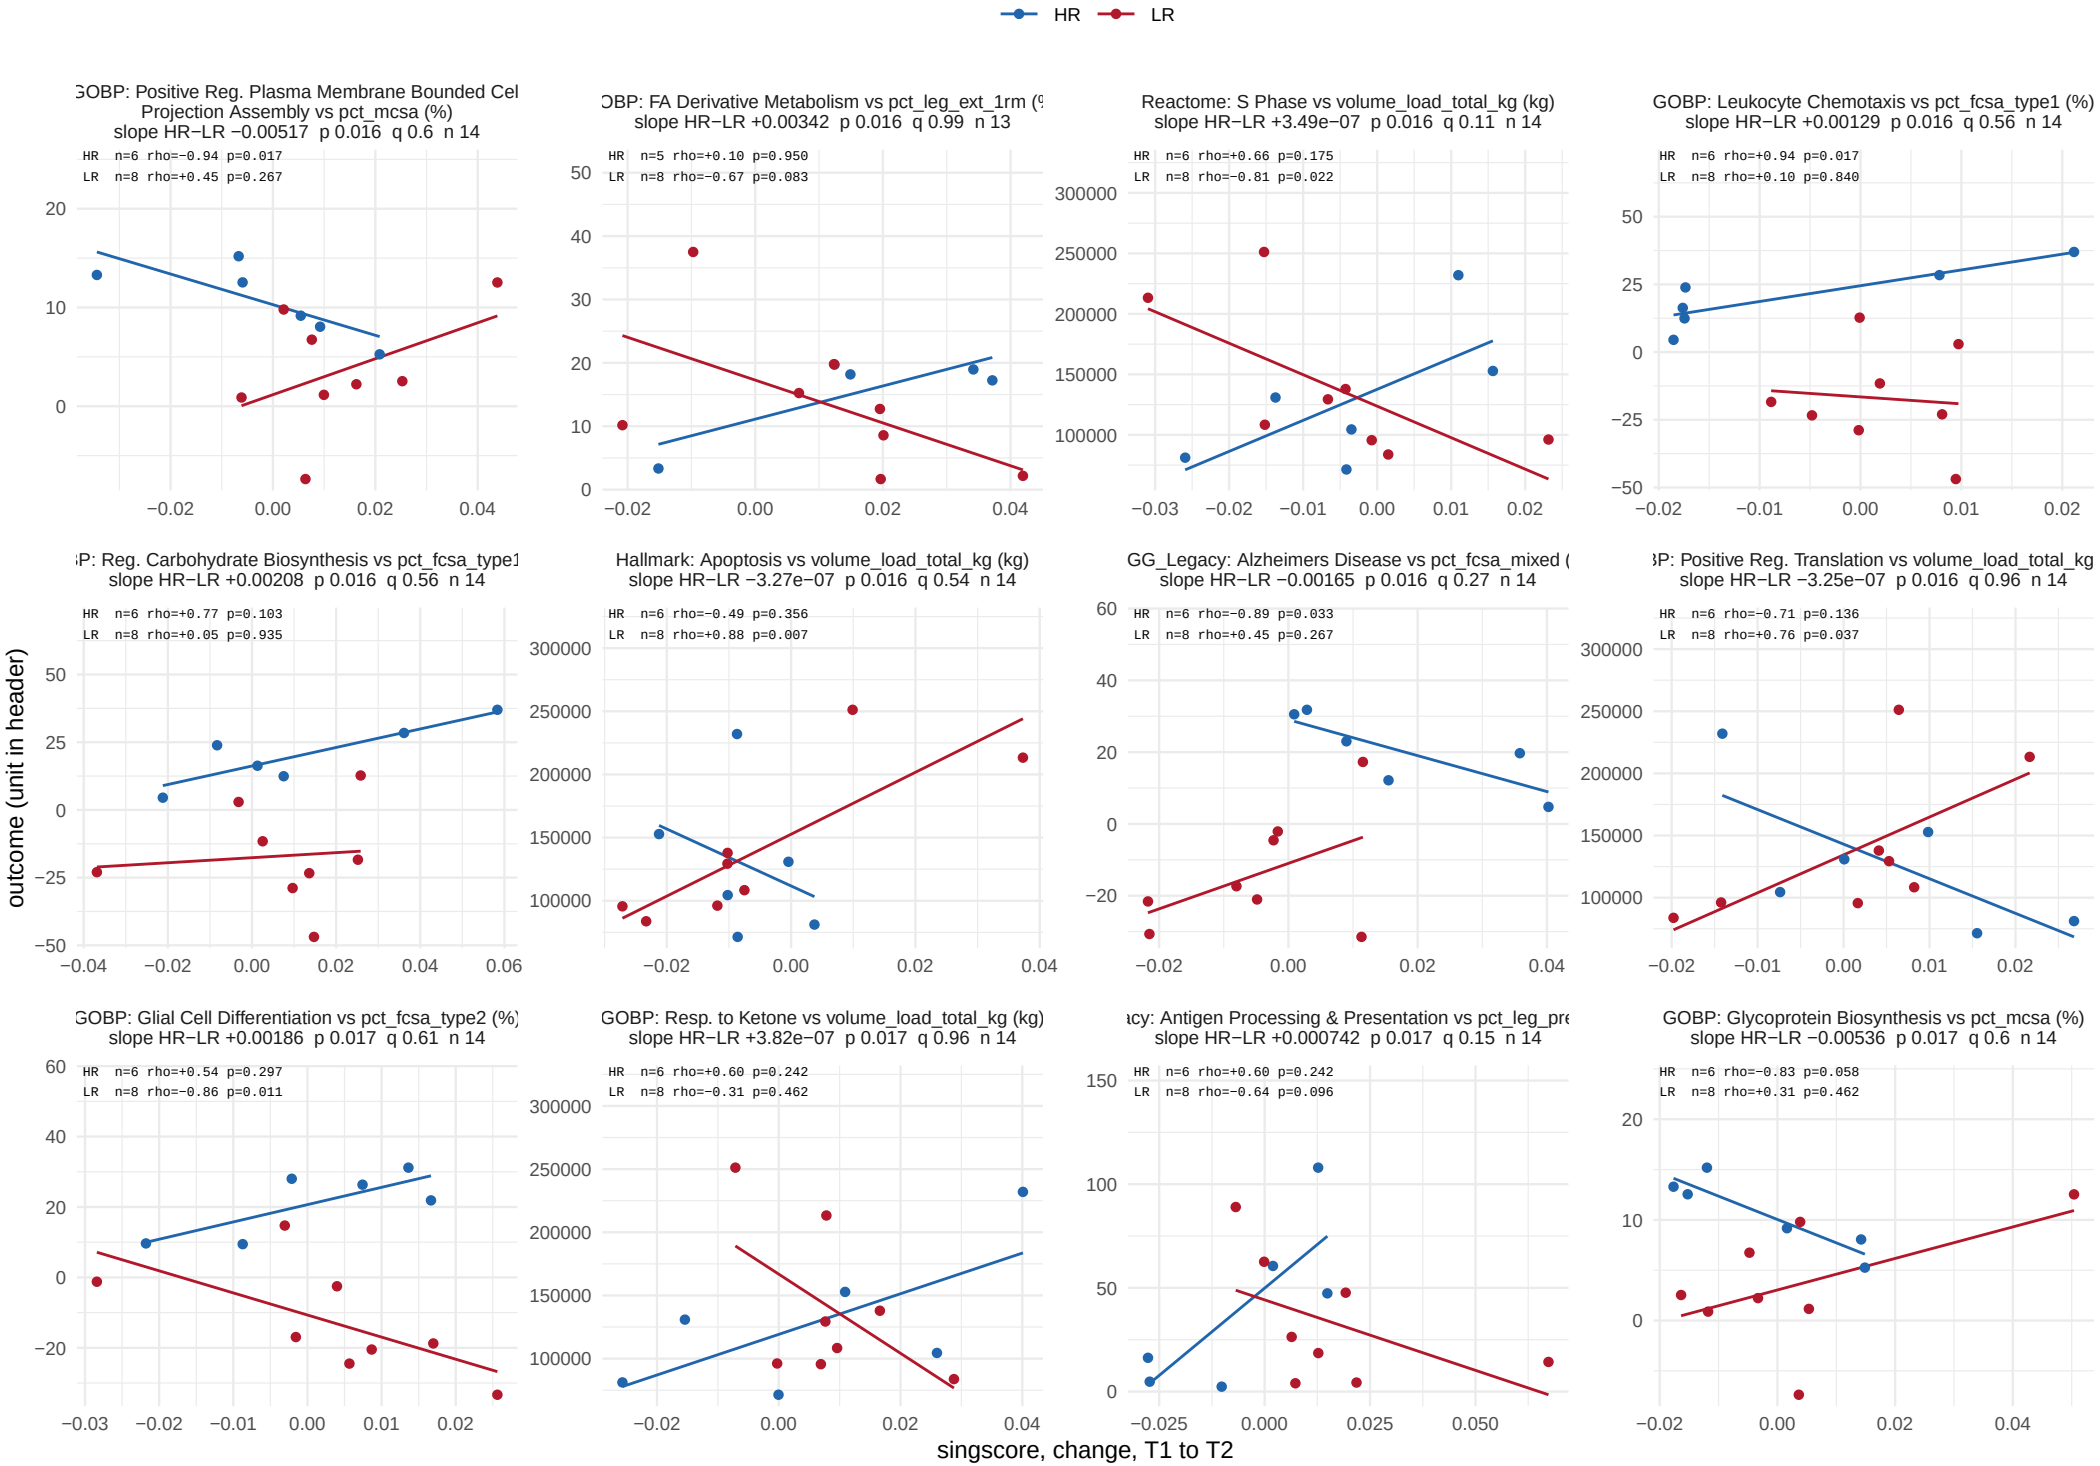

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, training window


604 of 9646 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 20 of 51.

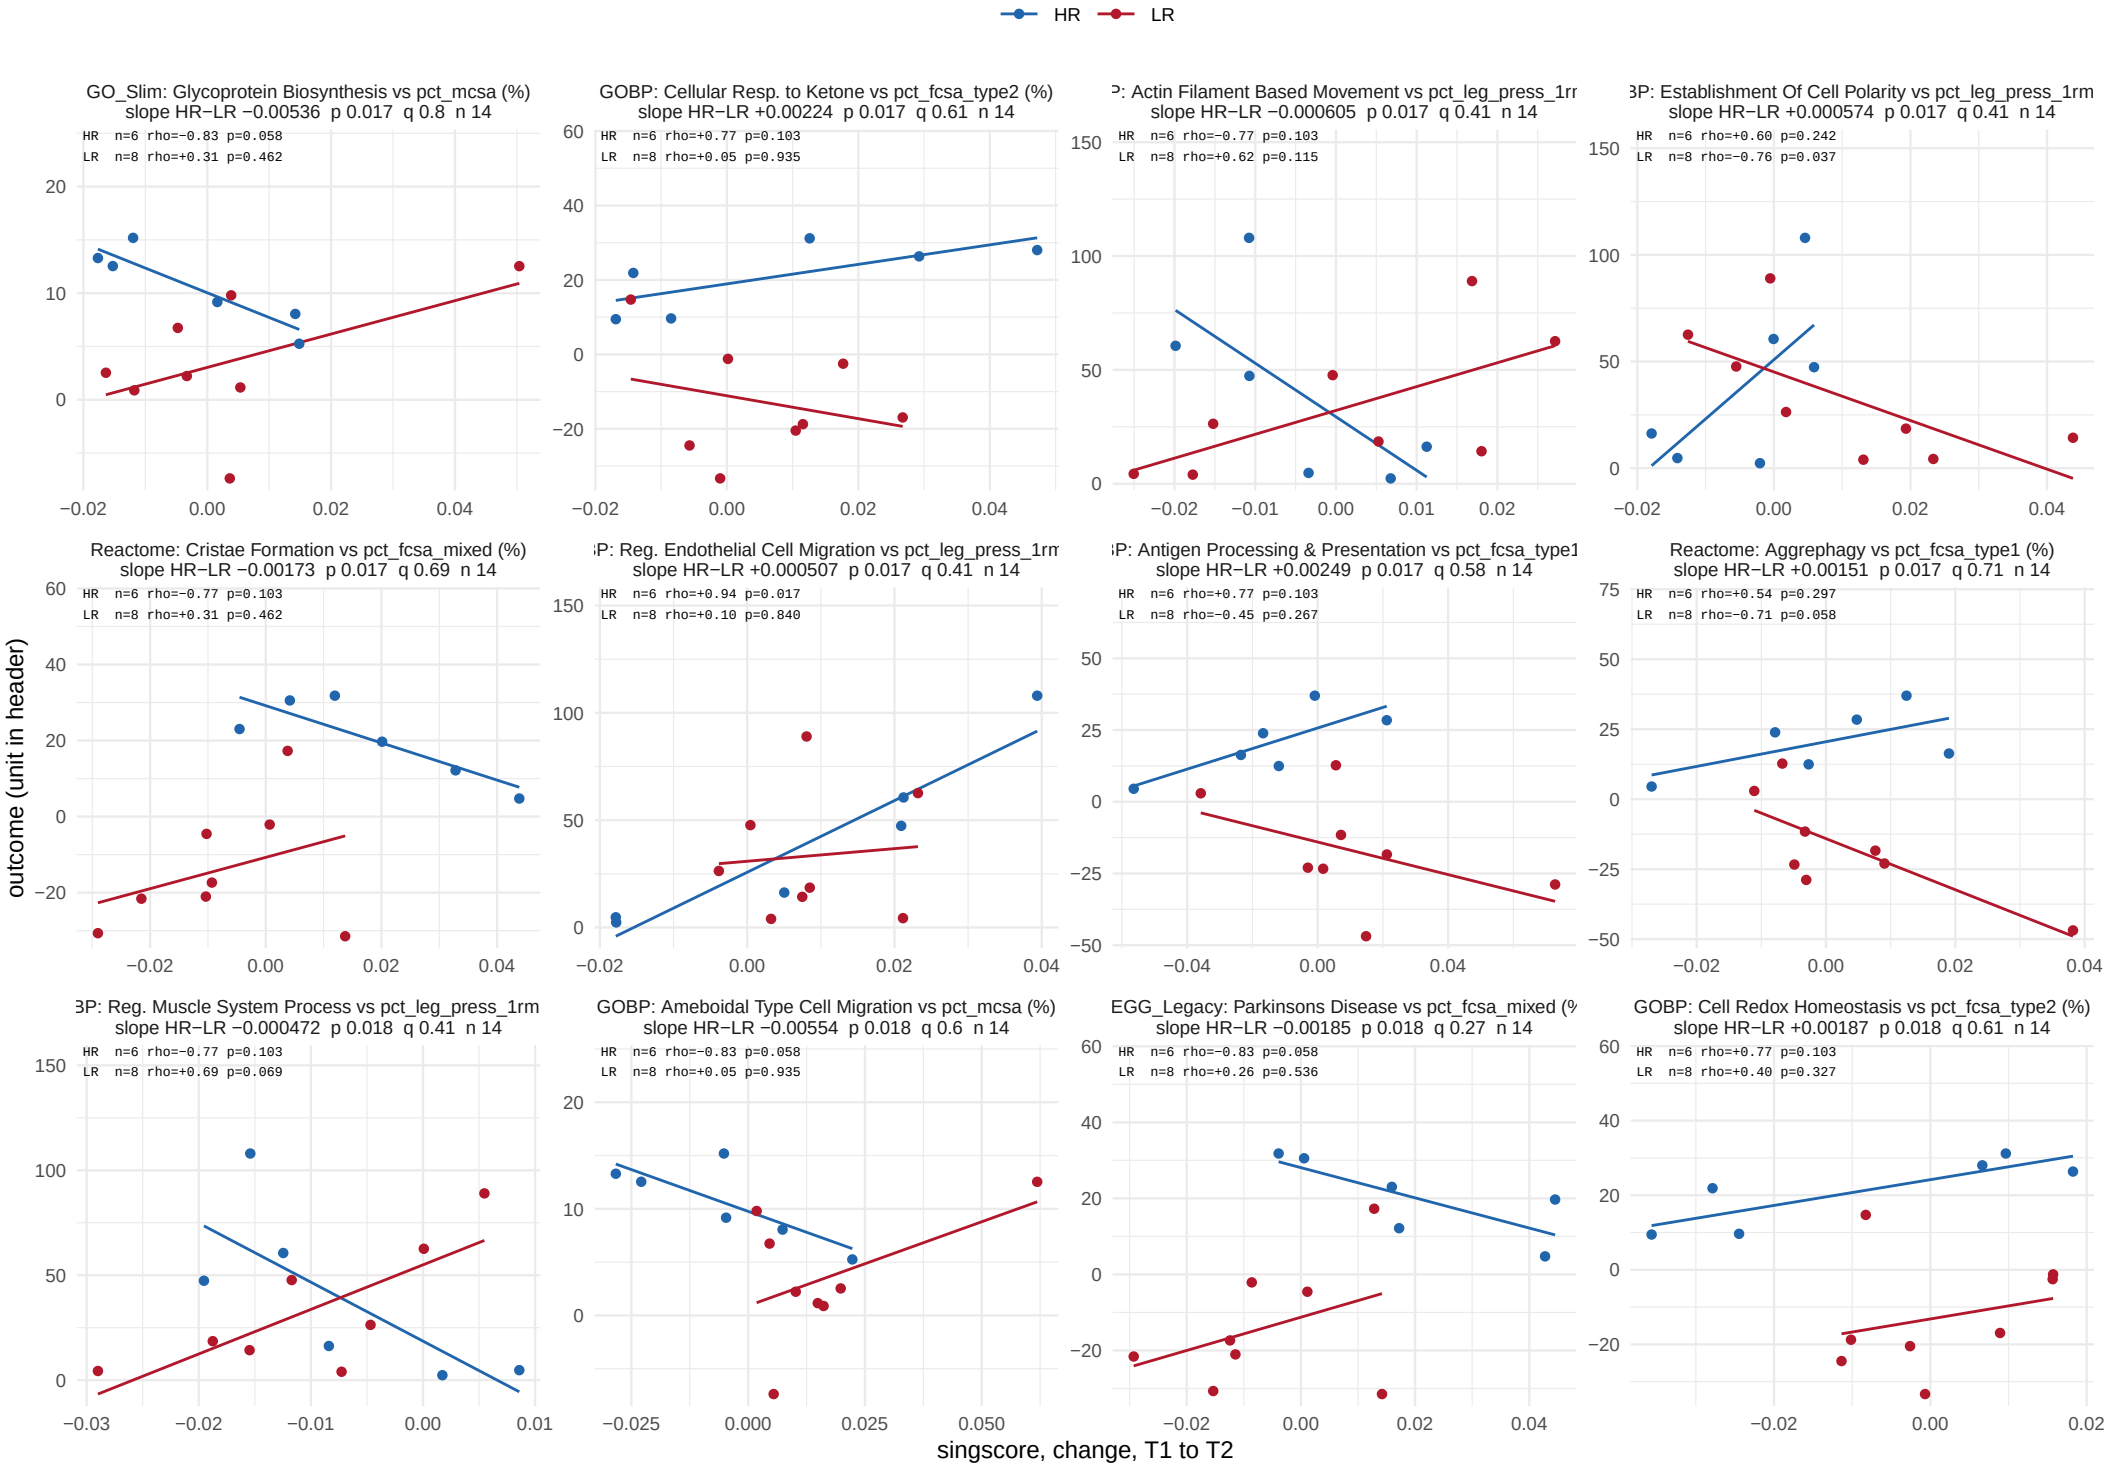

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, training window


604 of 9646 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 21 of 51.

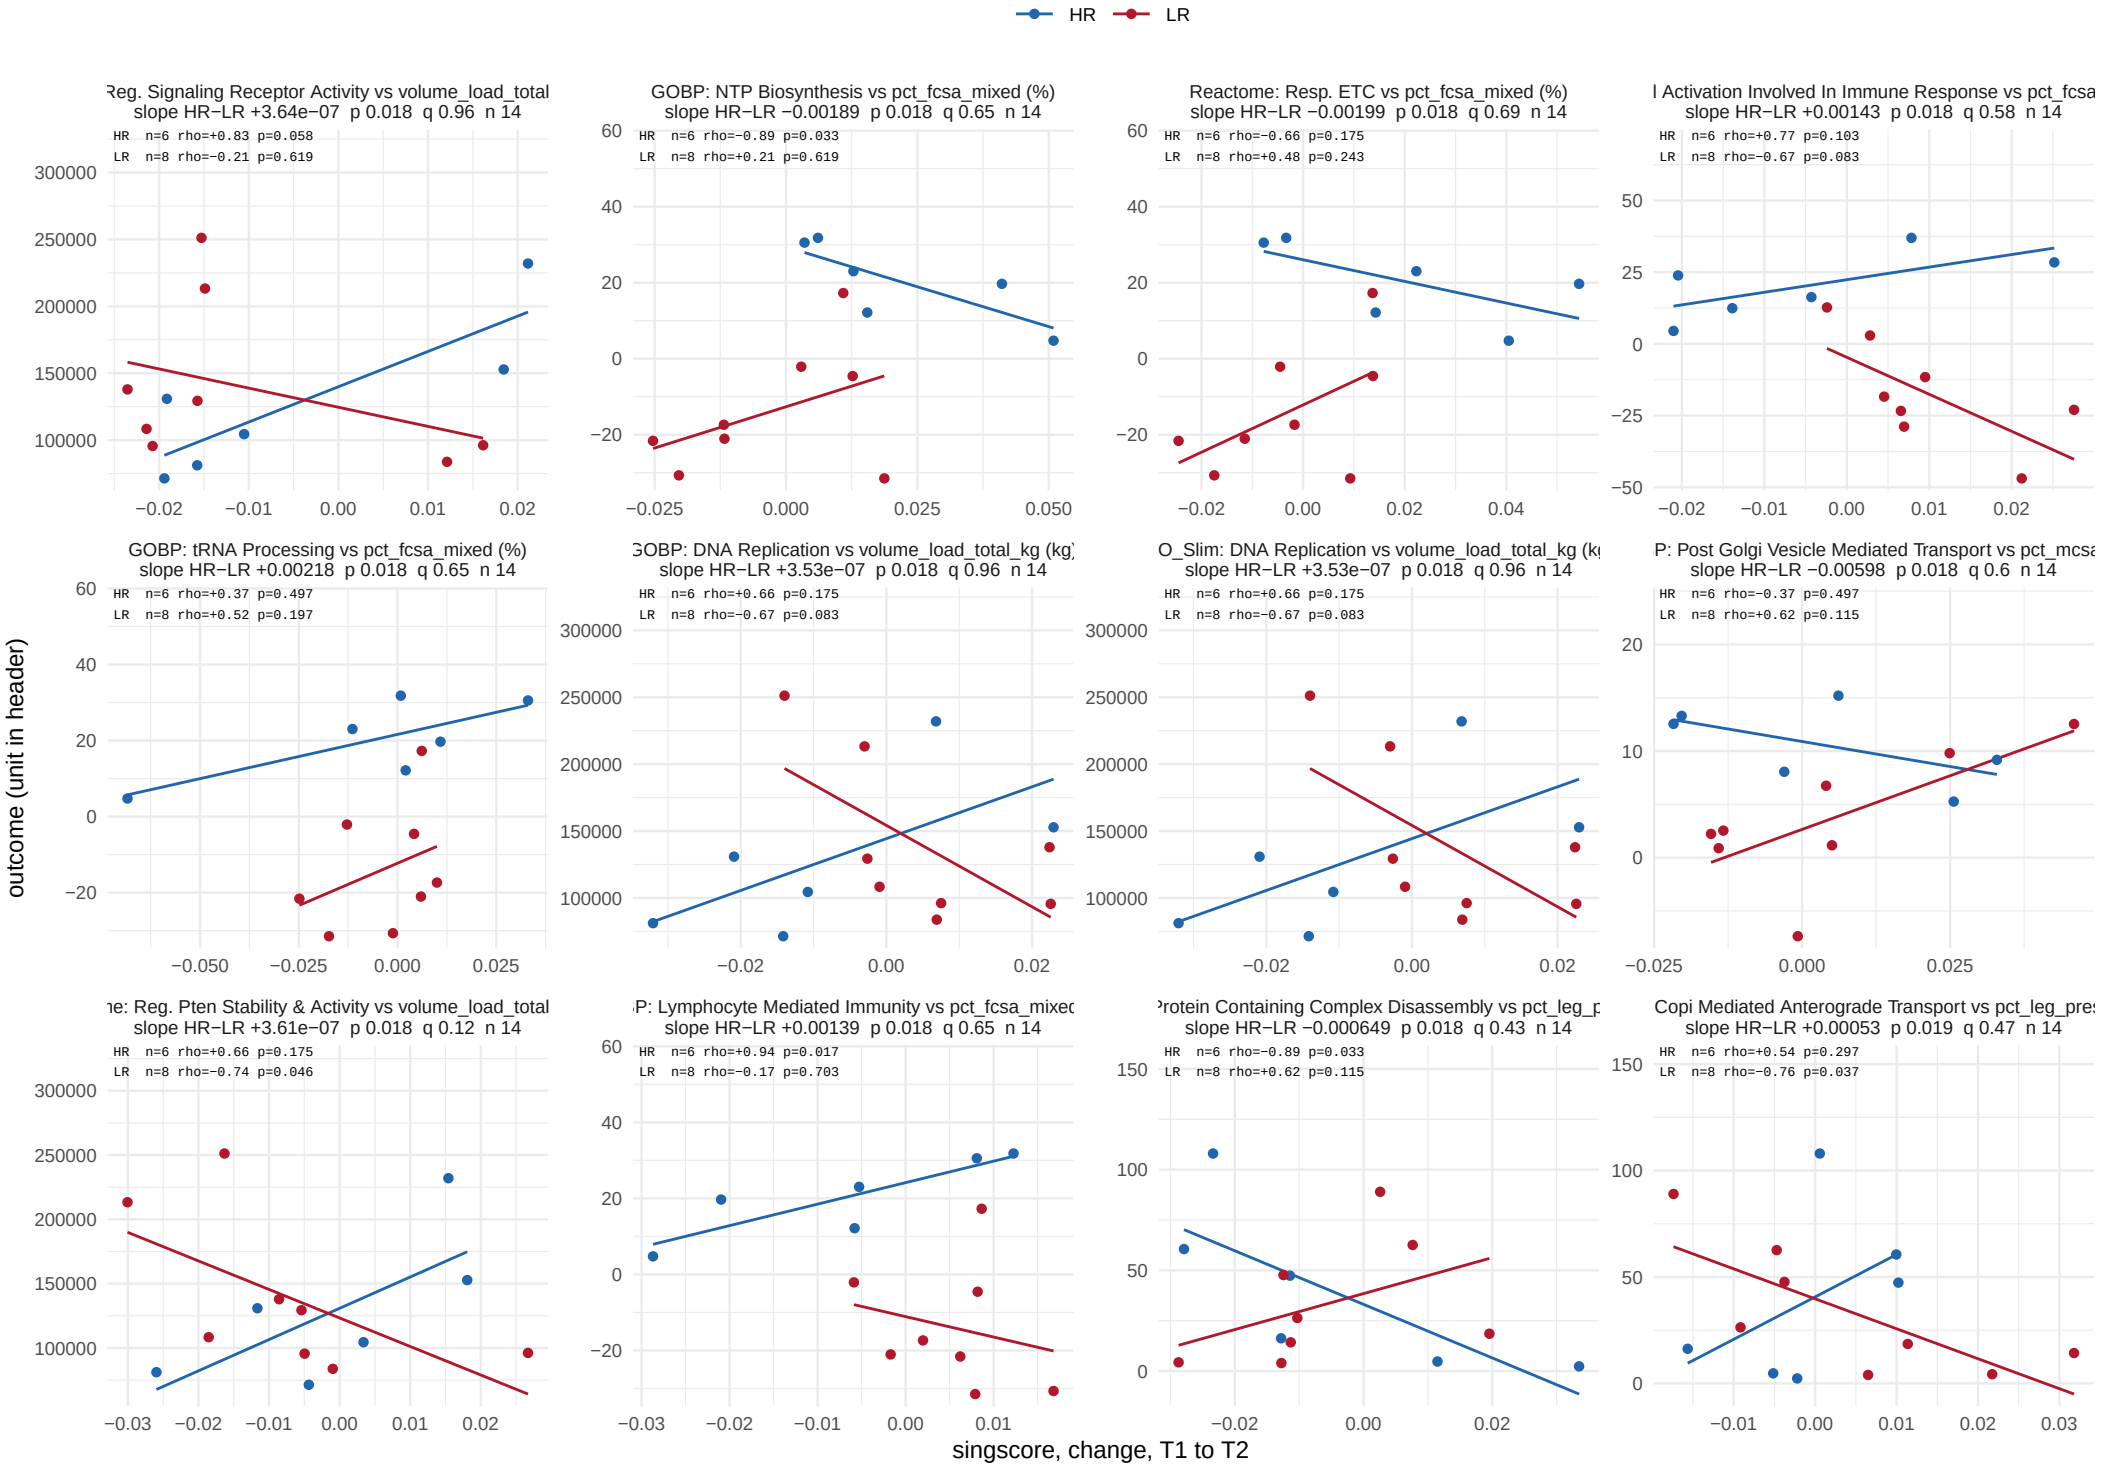

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, training window


604 of 9646 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 22 of 51.

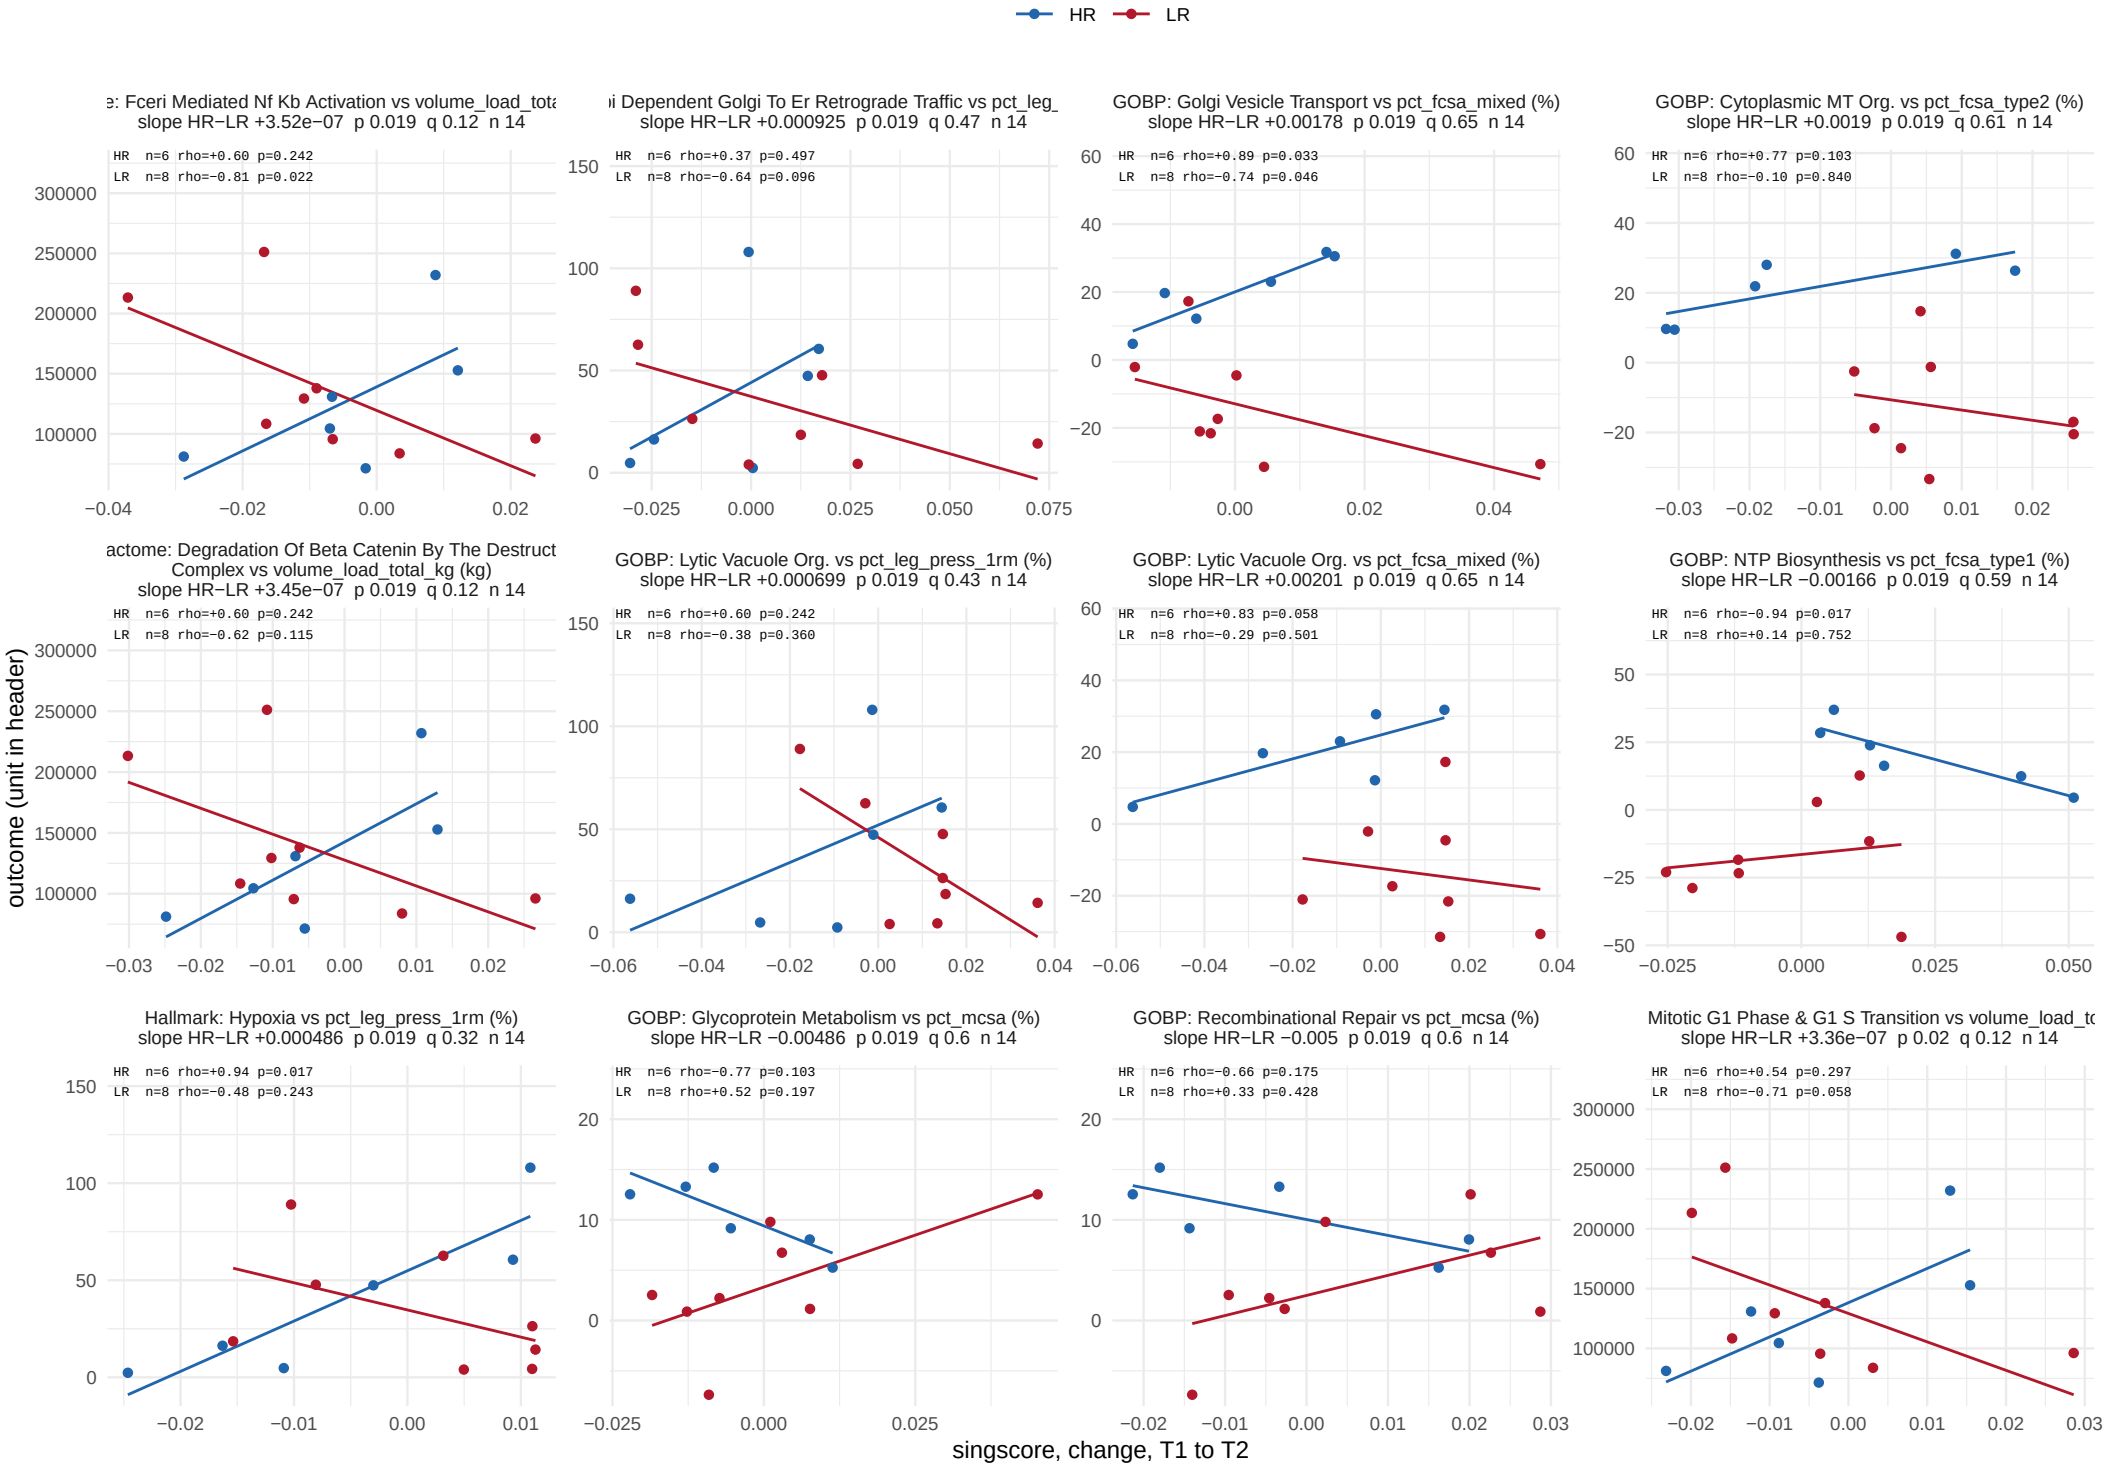

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, training window


604 of 9646 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 23 of 51.

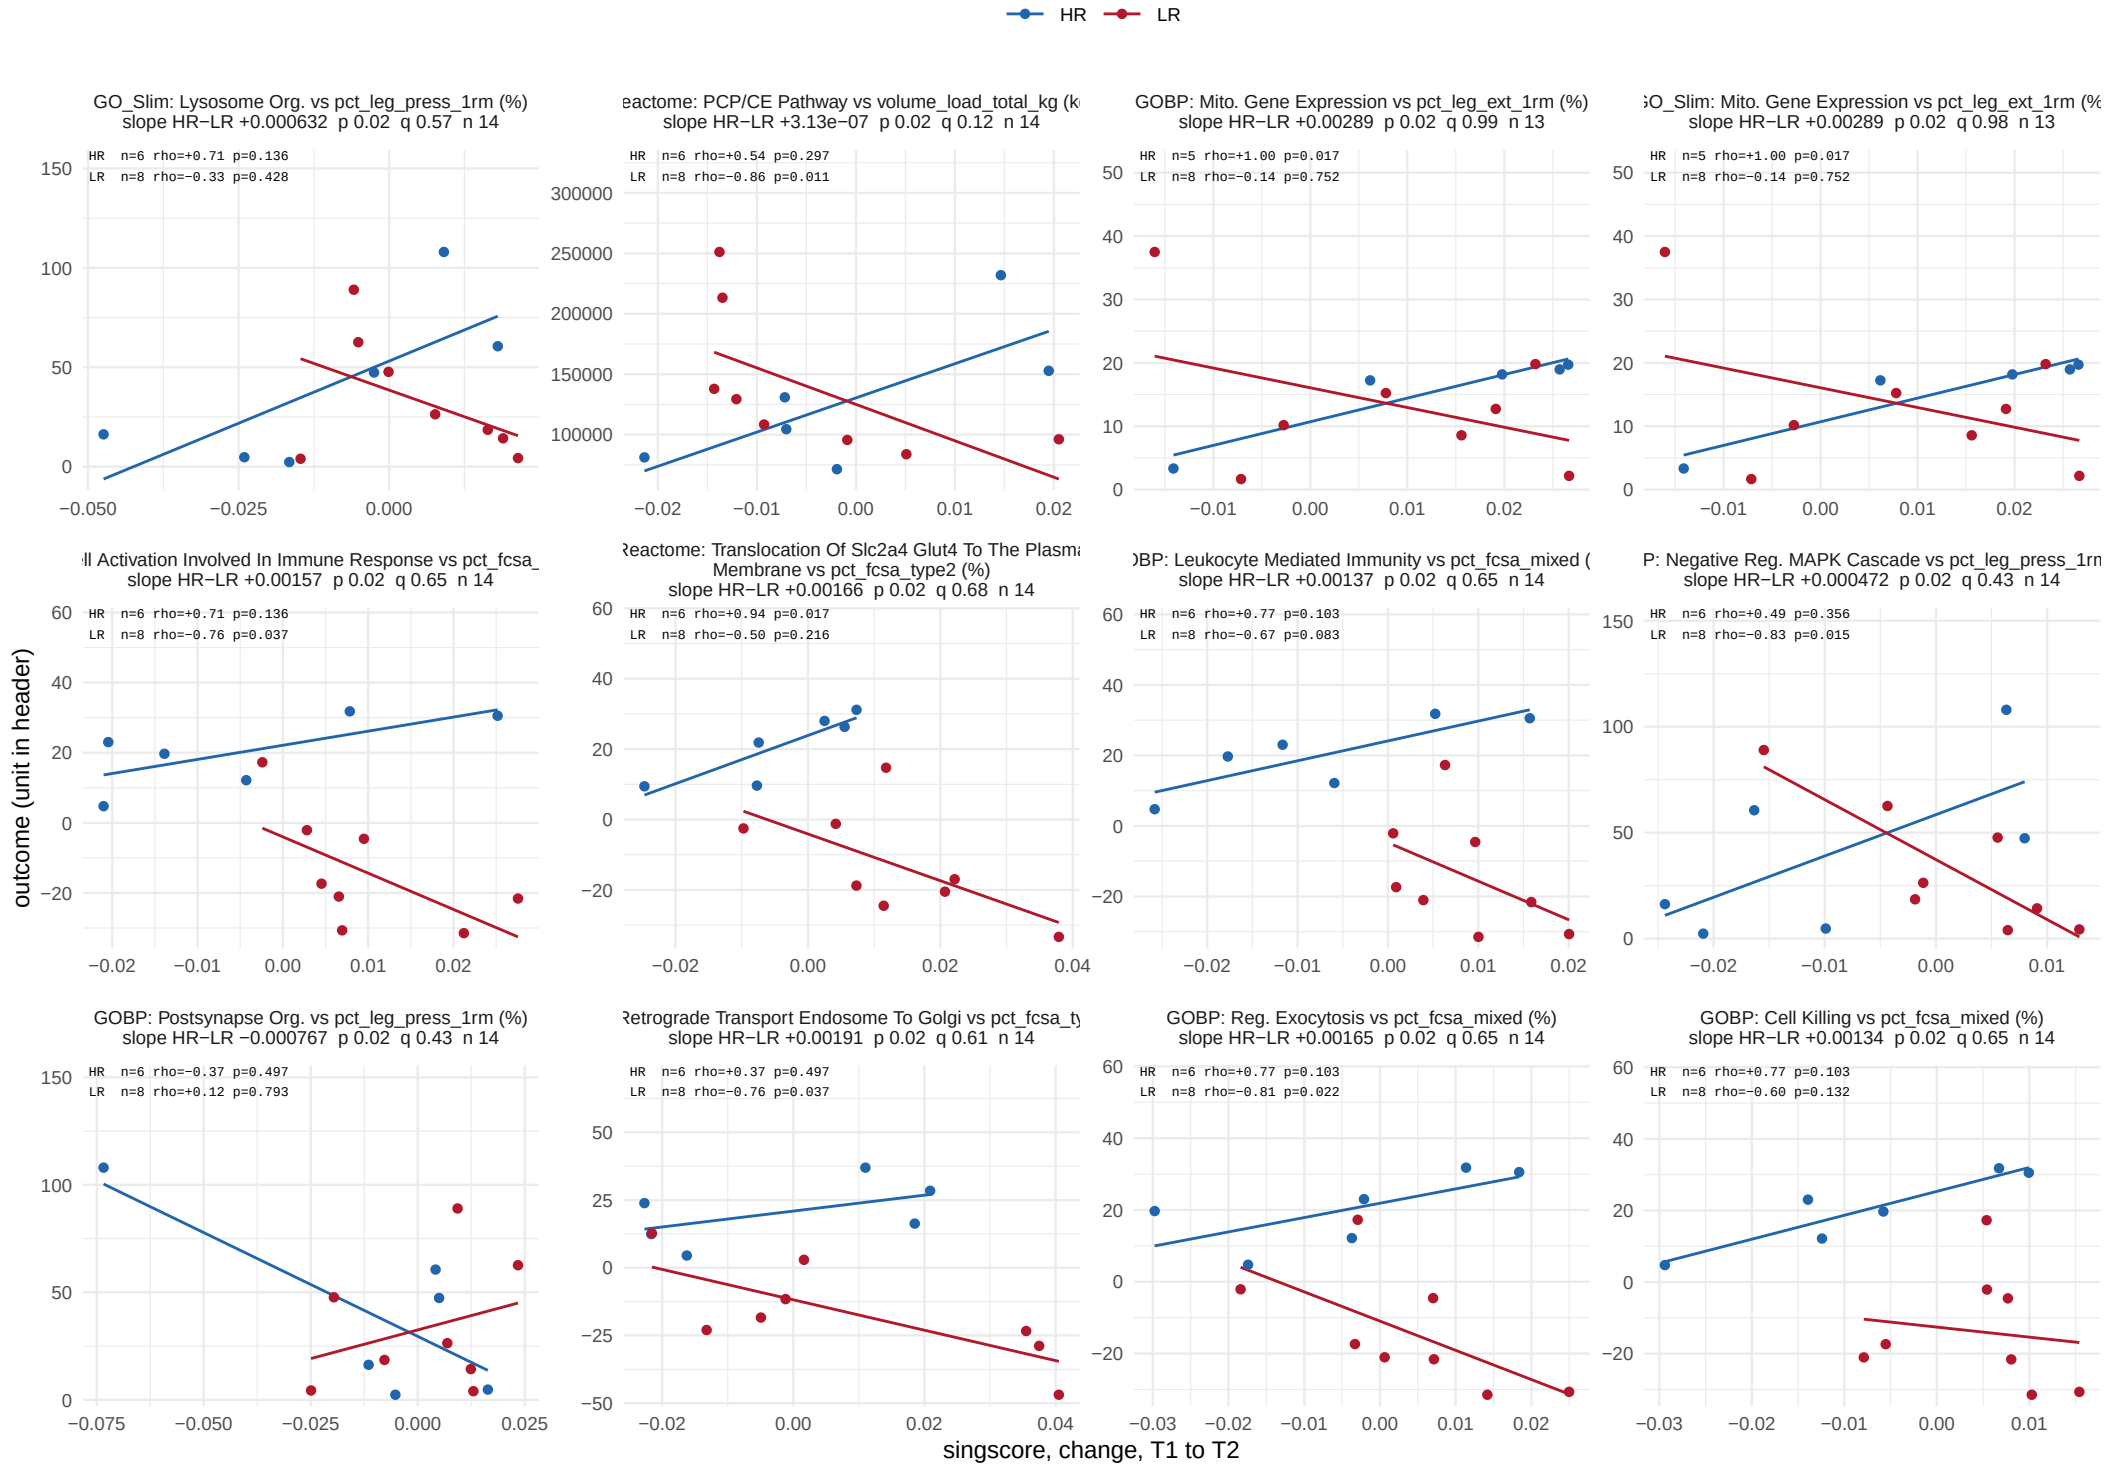

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, training window

604 of 9646 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 24 of 51.

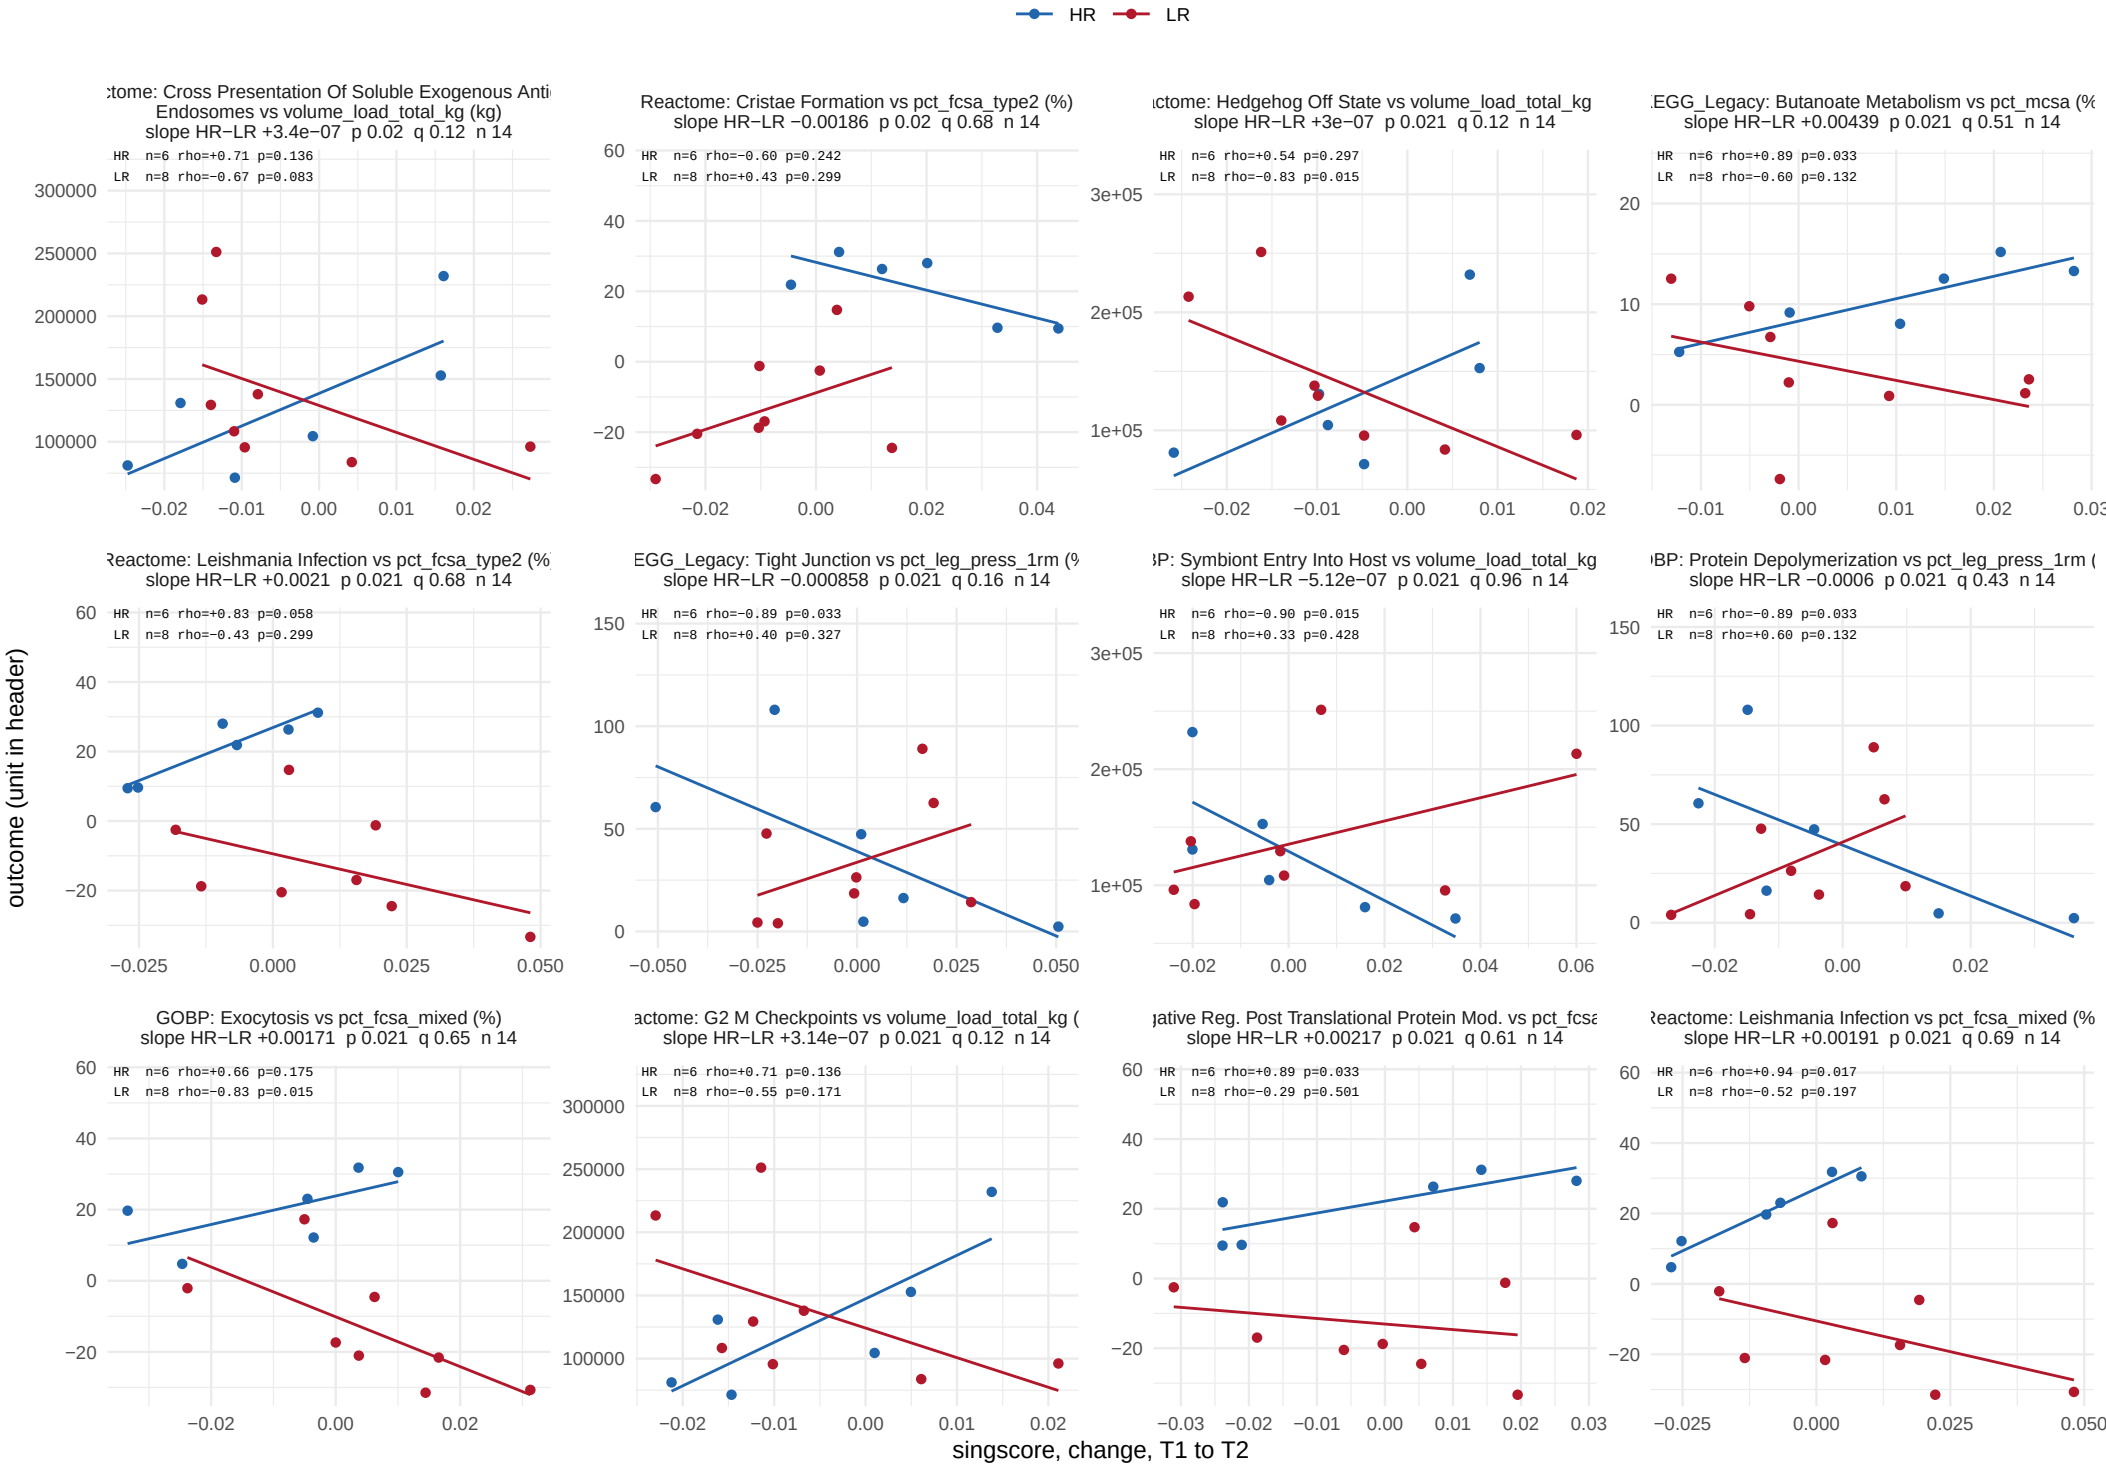

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, training window


604 of 9646 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 25 of 51.



One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, training window


604 of 9646 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 26 of 51.

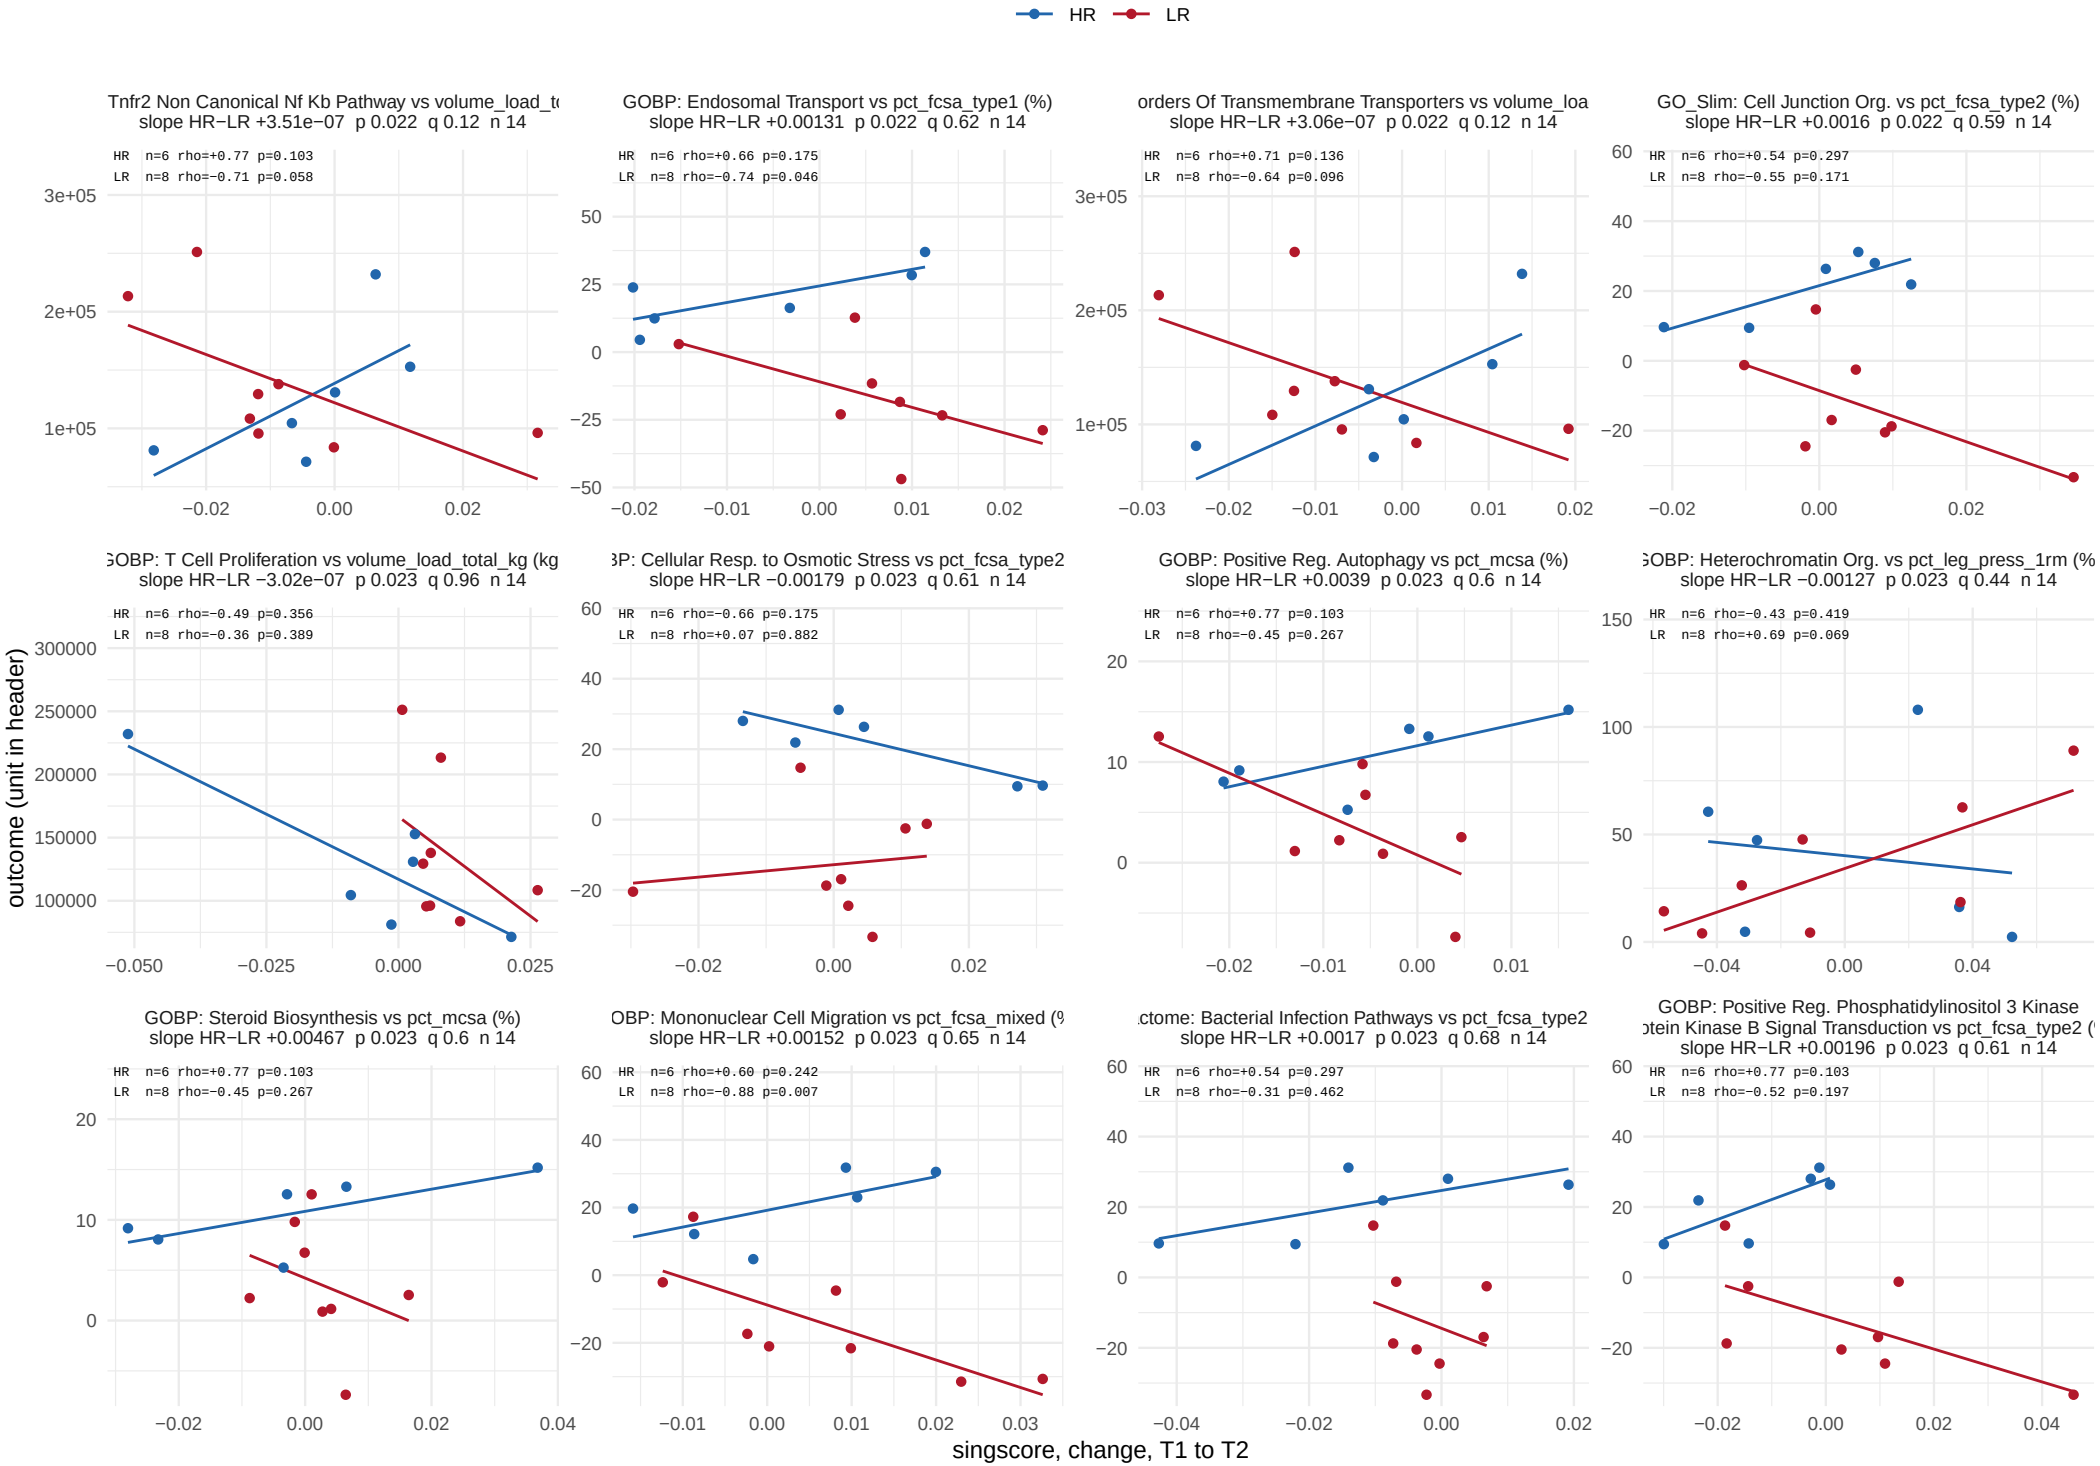

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, training window


604 of 9646 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 27 of 51.

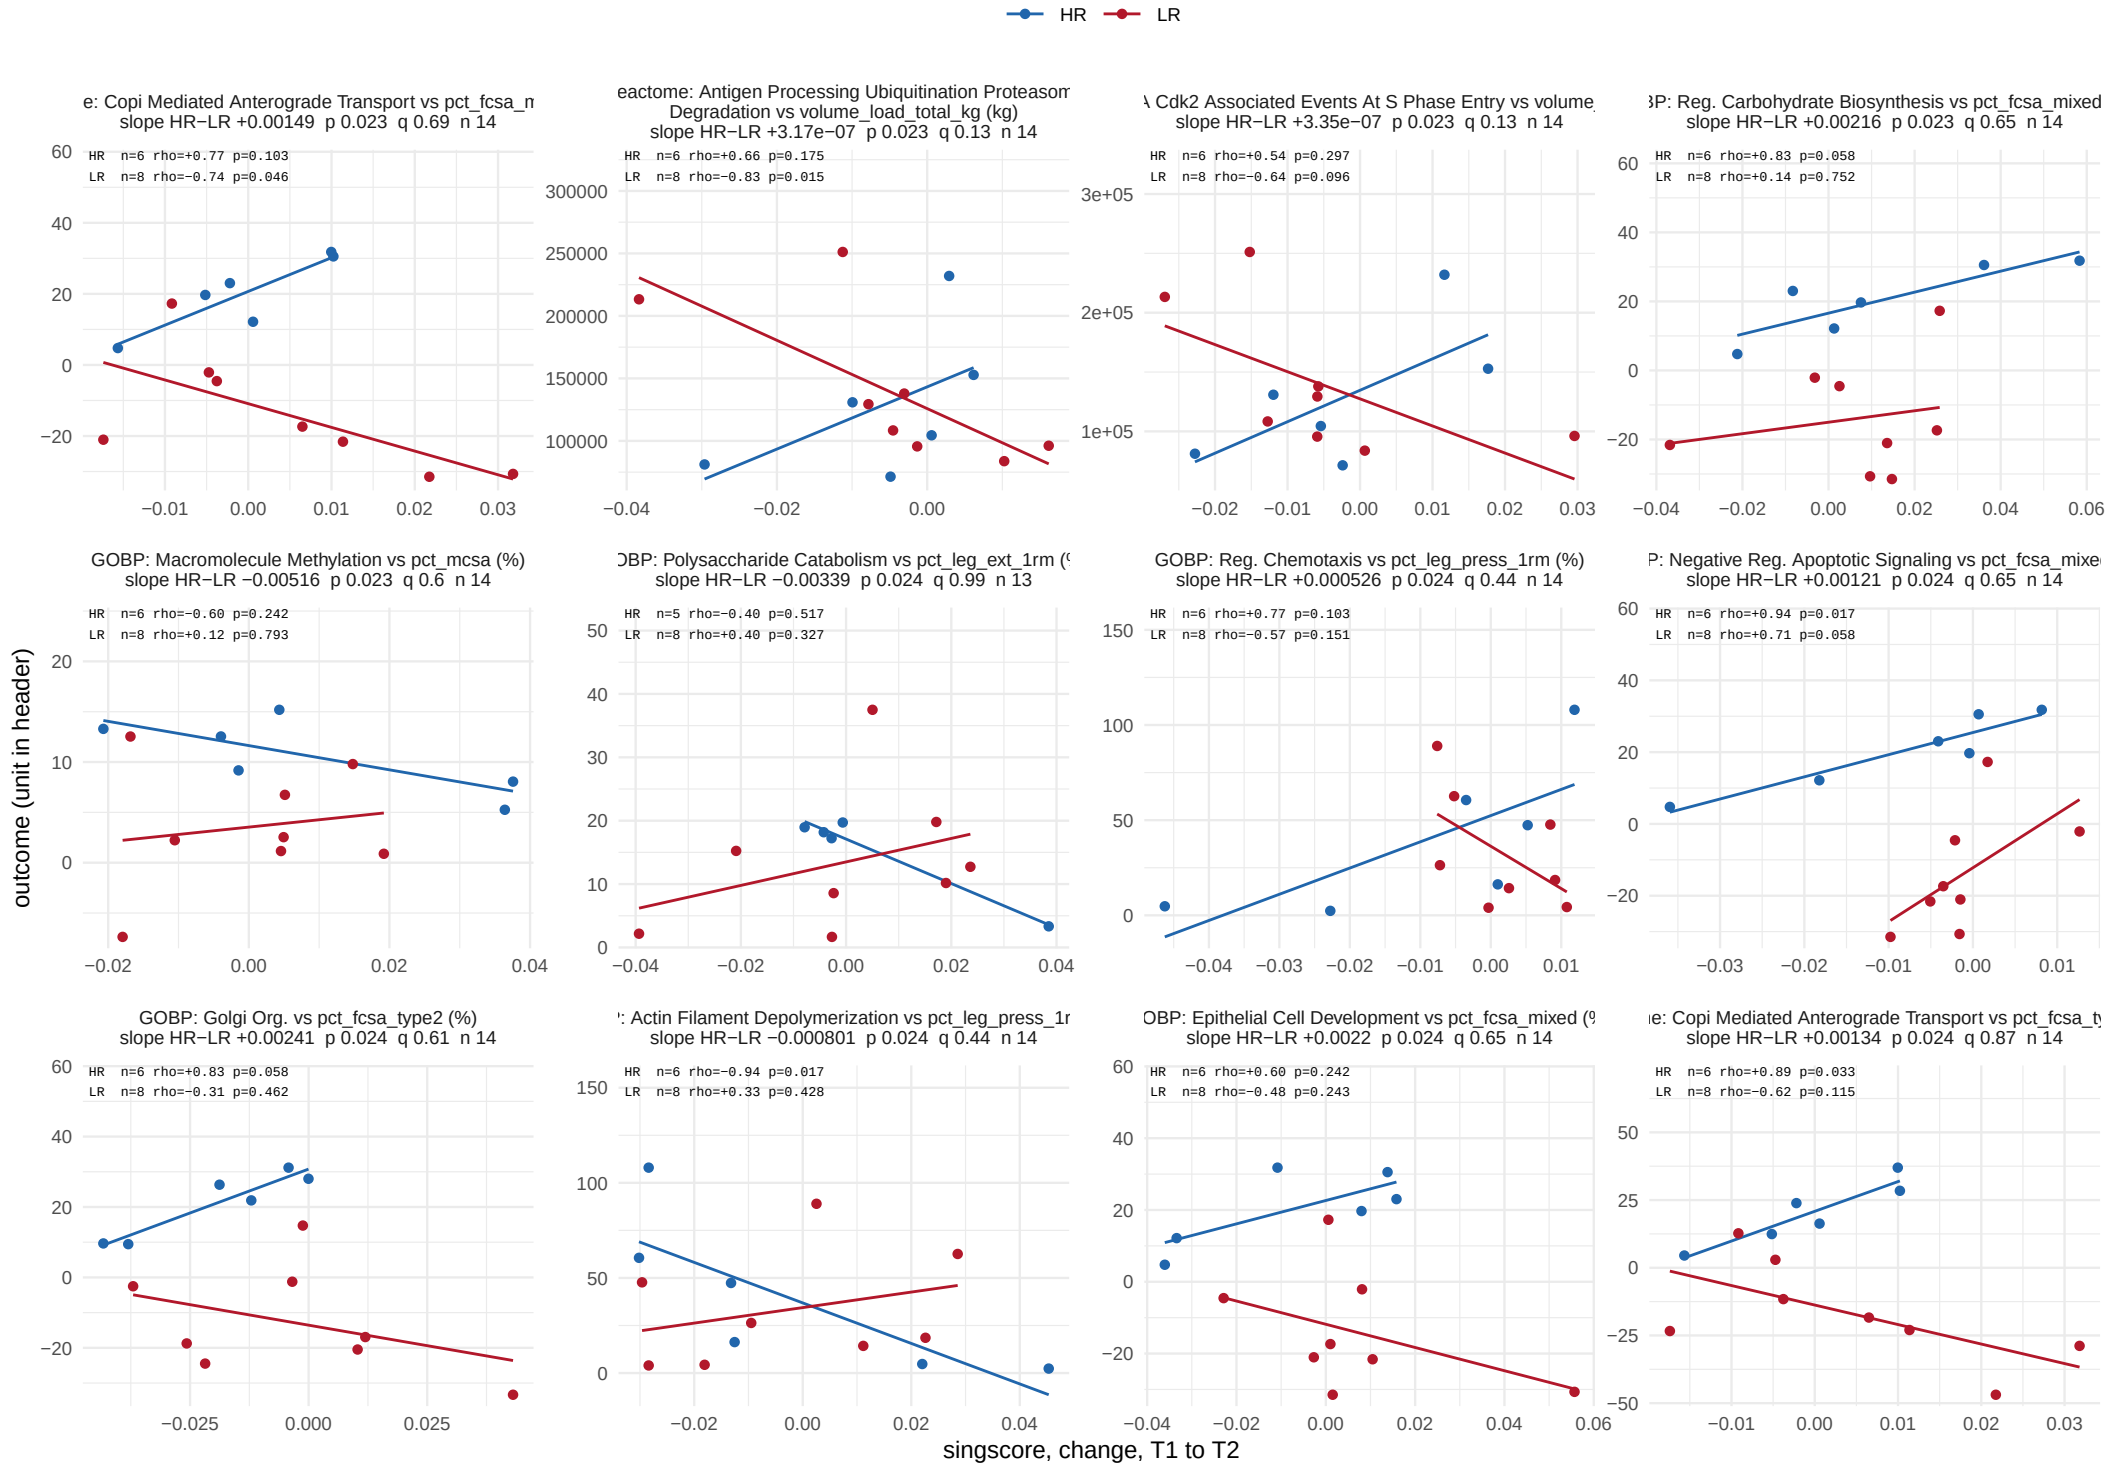

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, training window


604 of 9646 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 28 of 51.

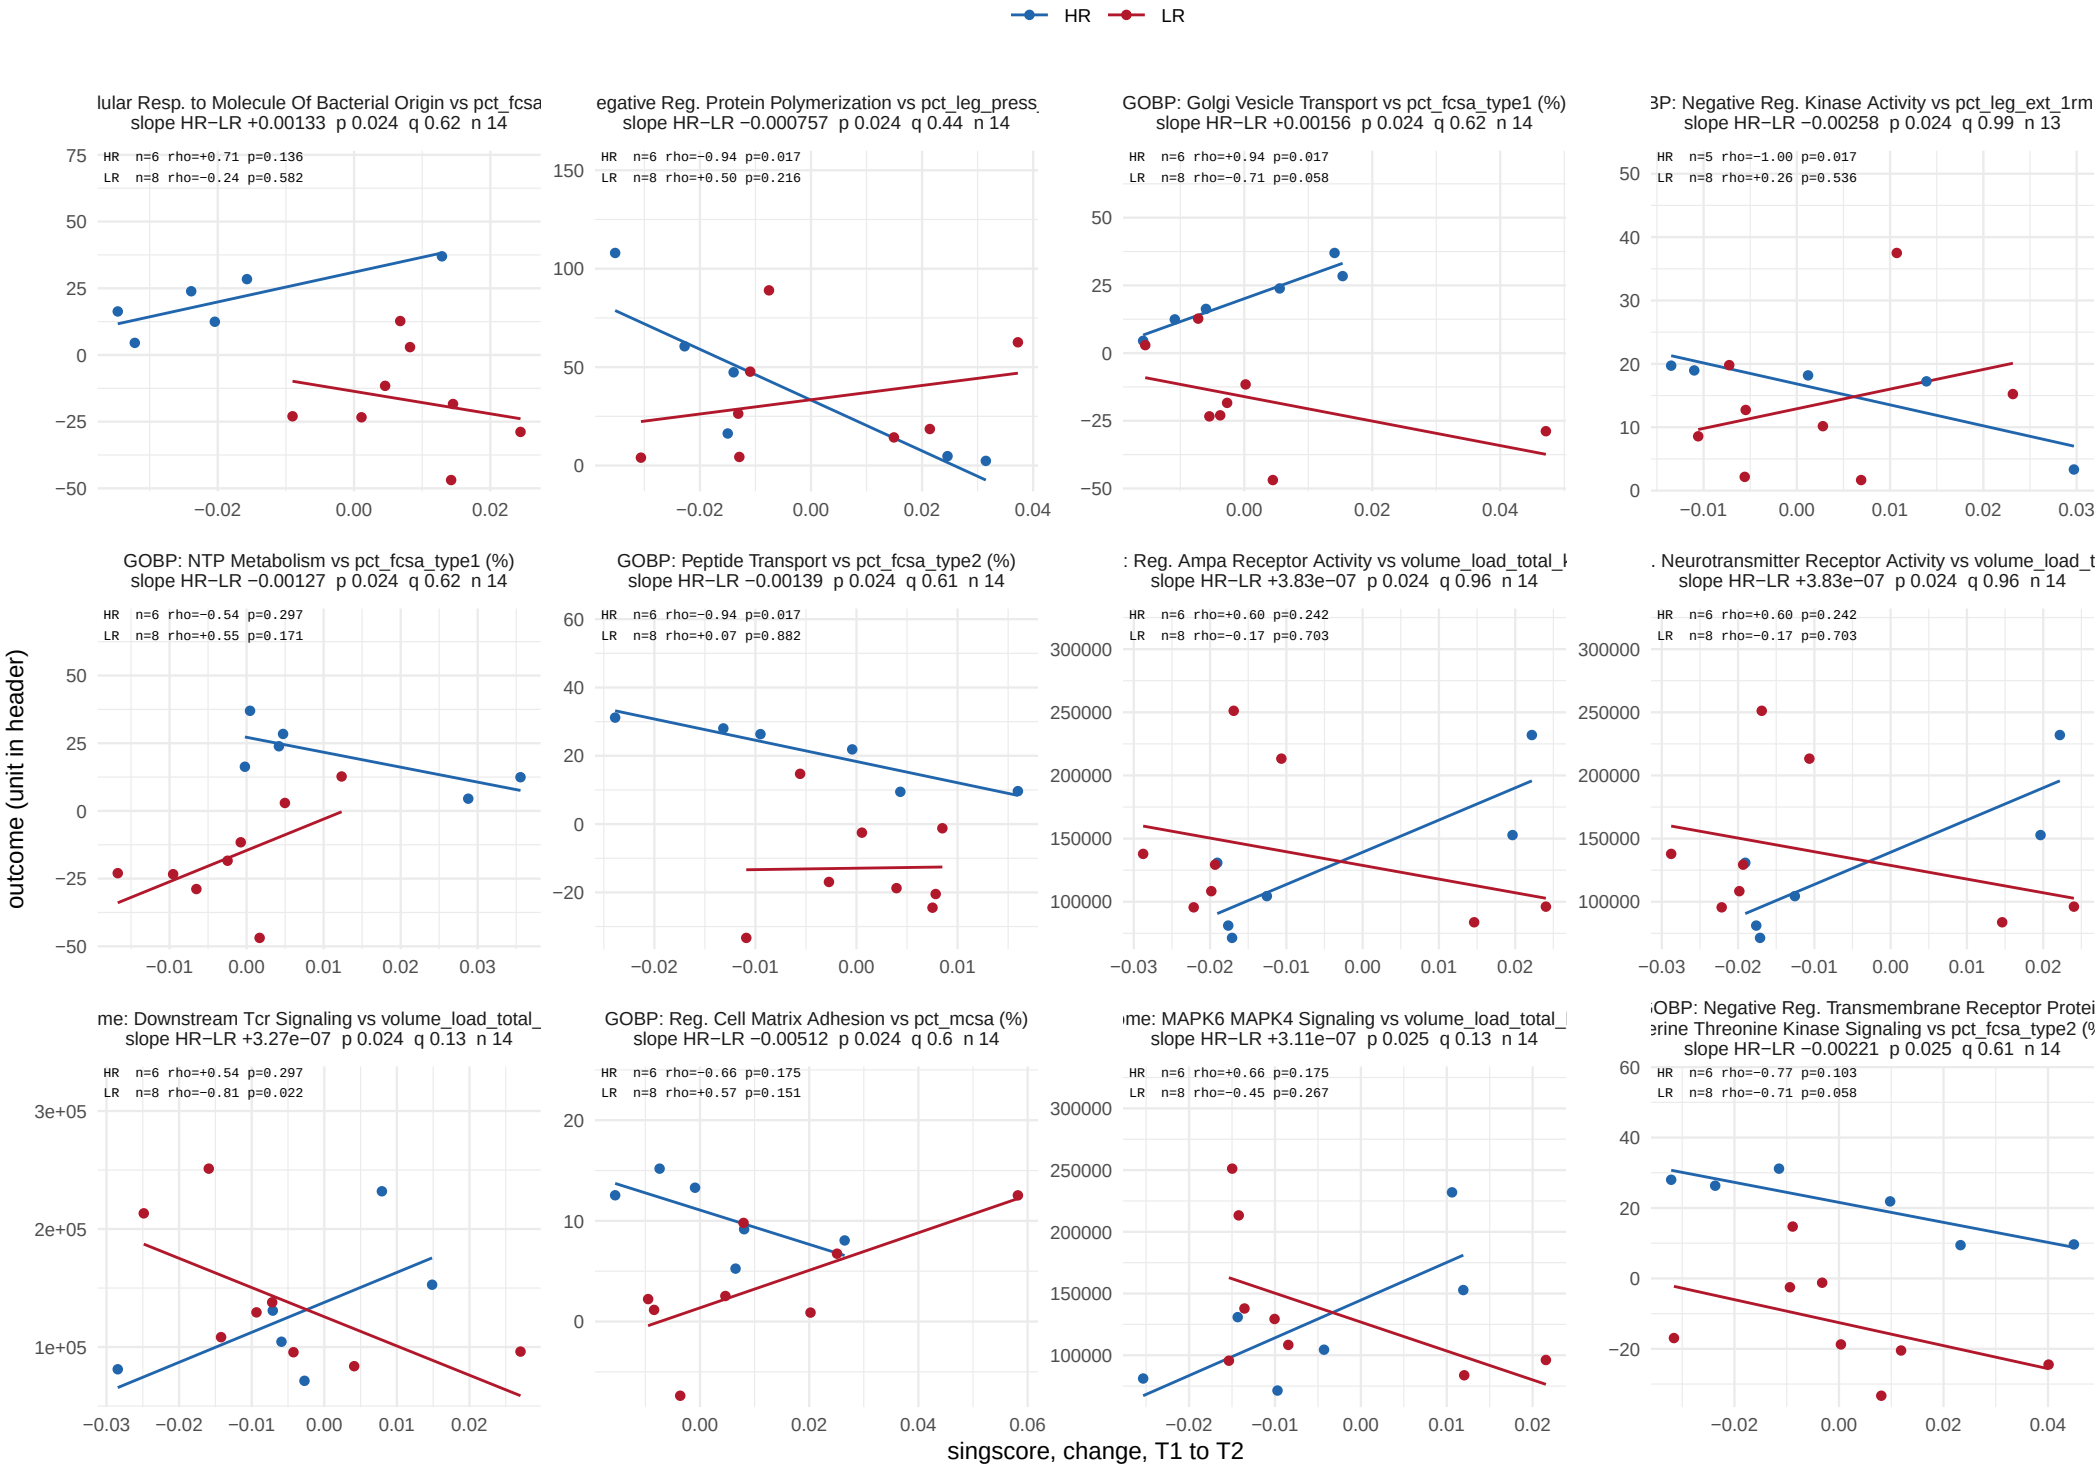

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, training window


604 of 9646 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 29 of 51.

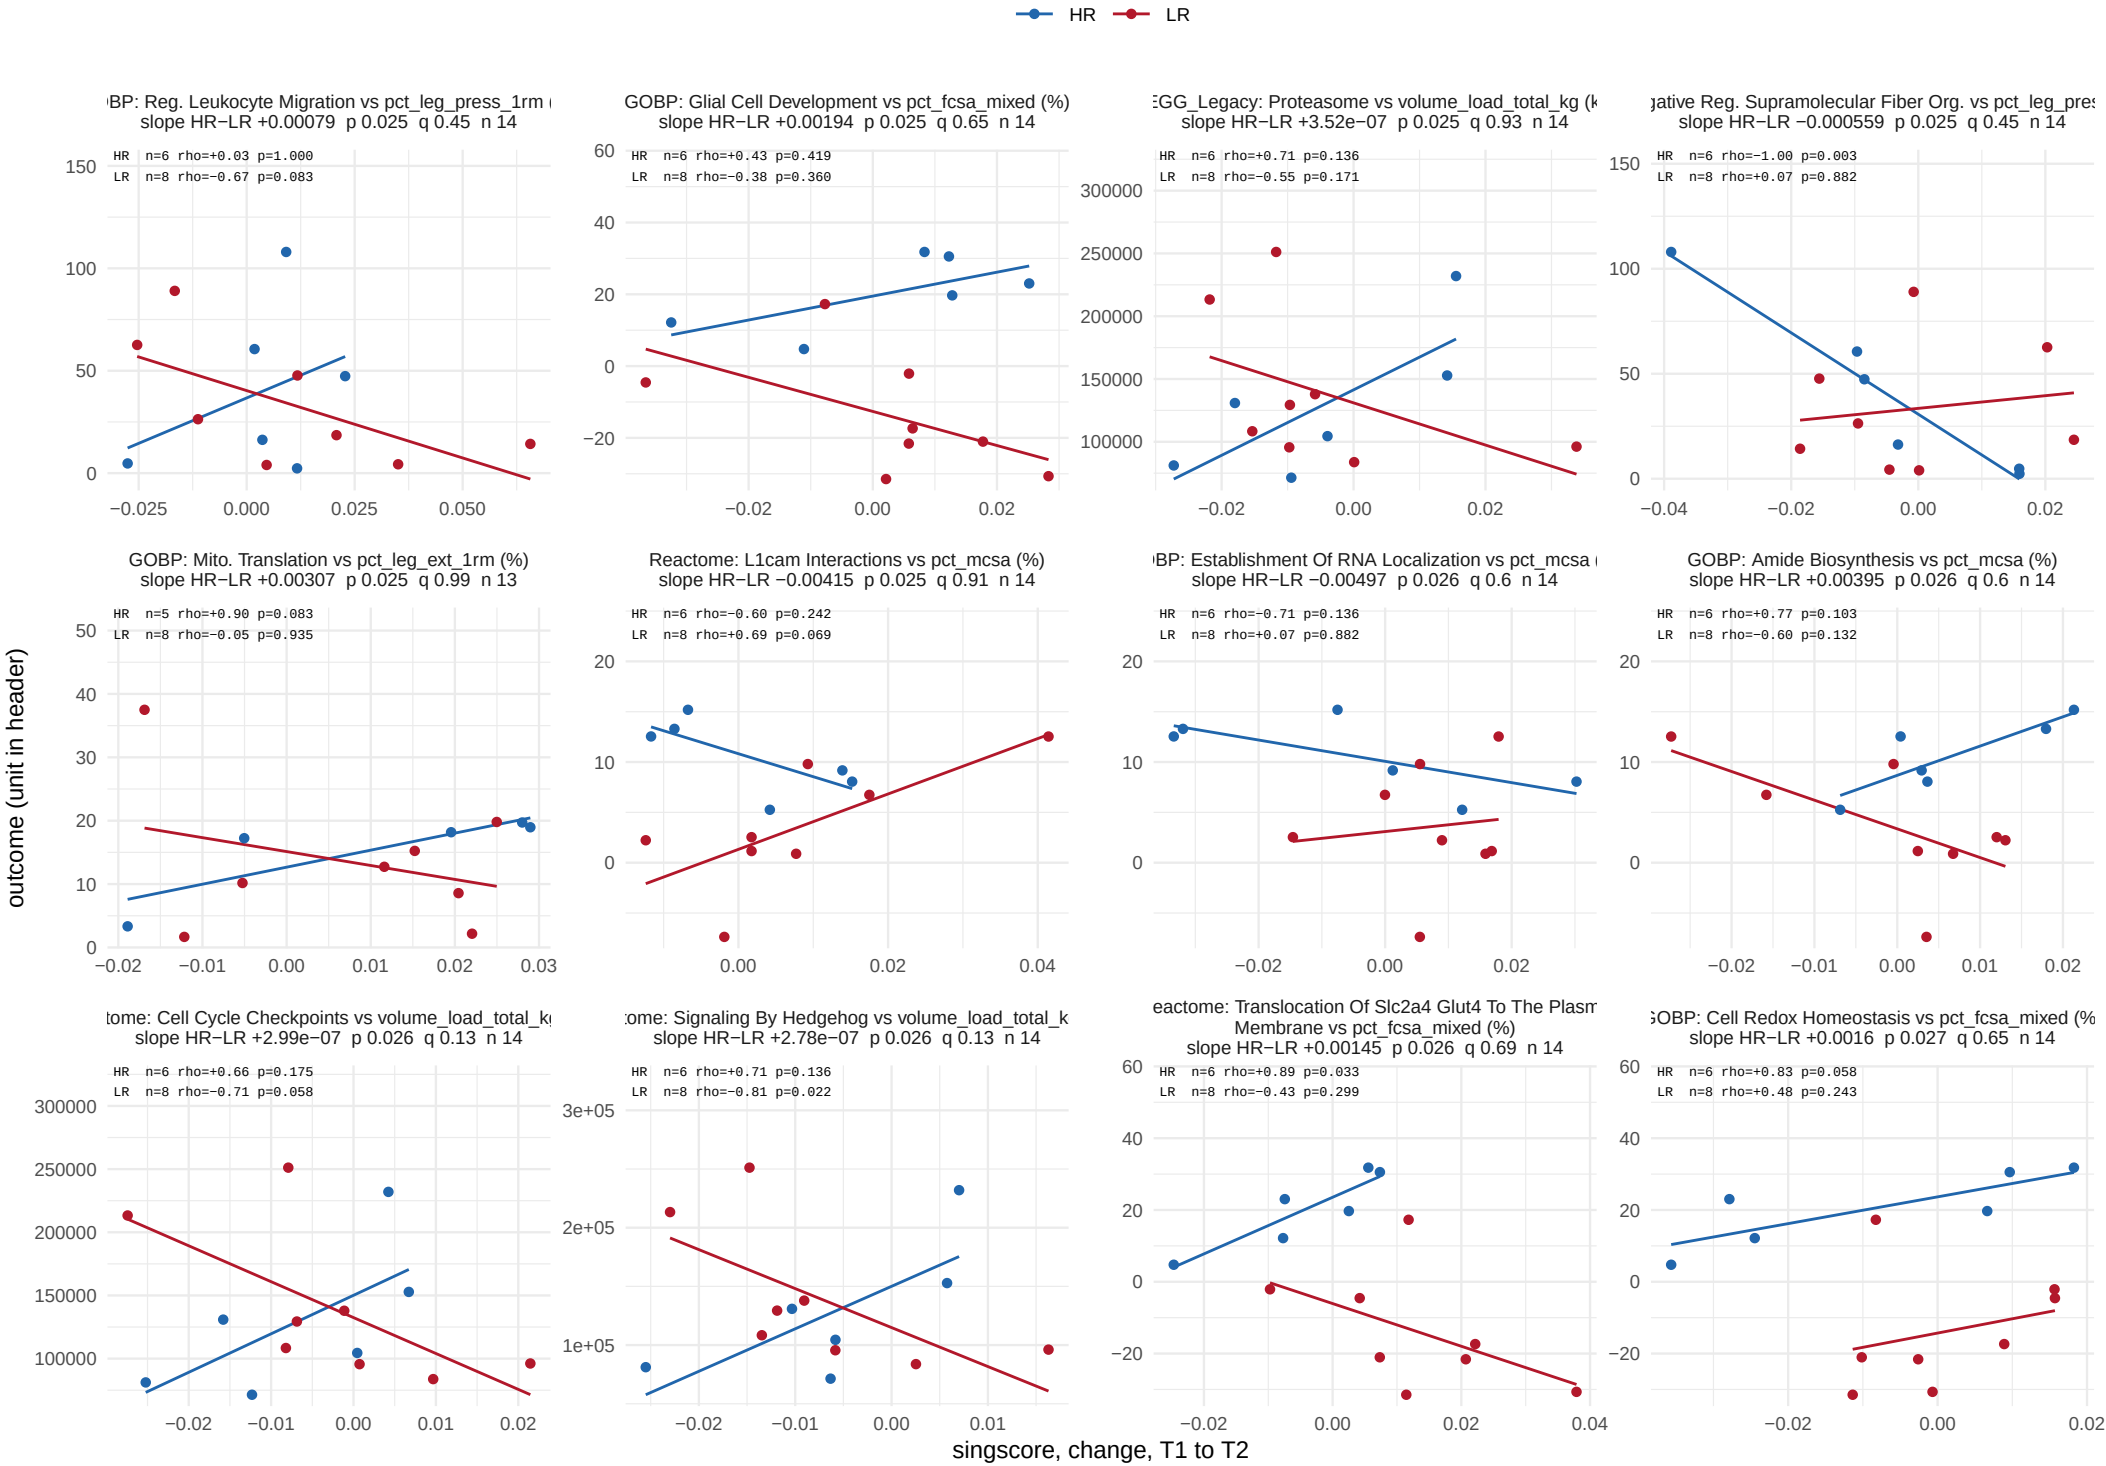

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, training window


604 of 9646 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 30 of 51.

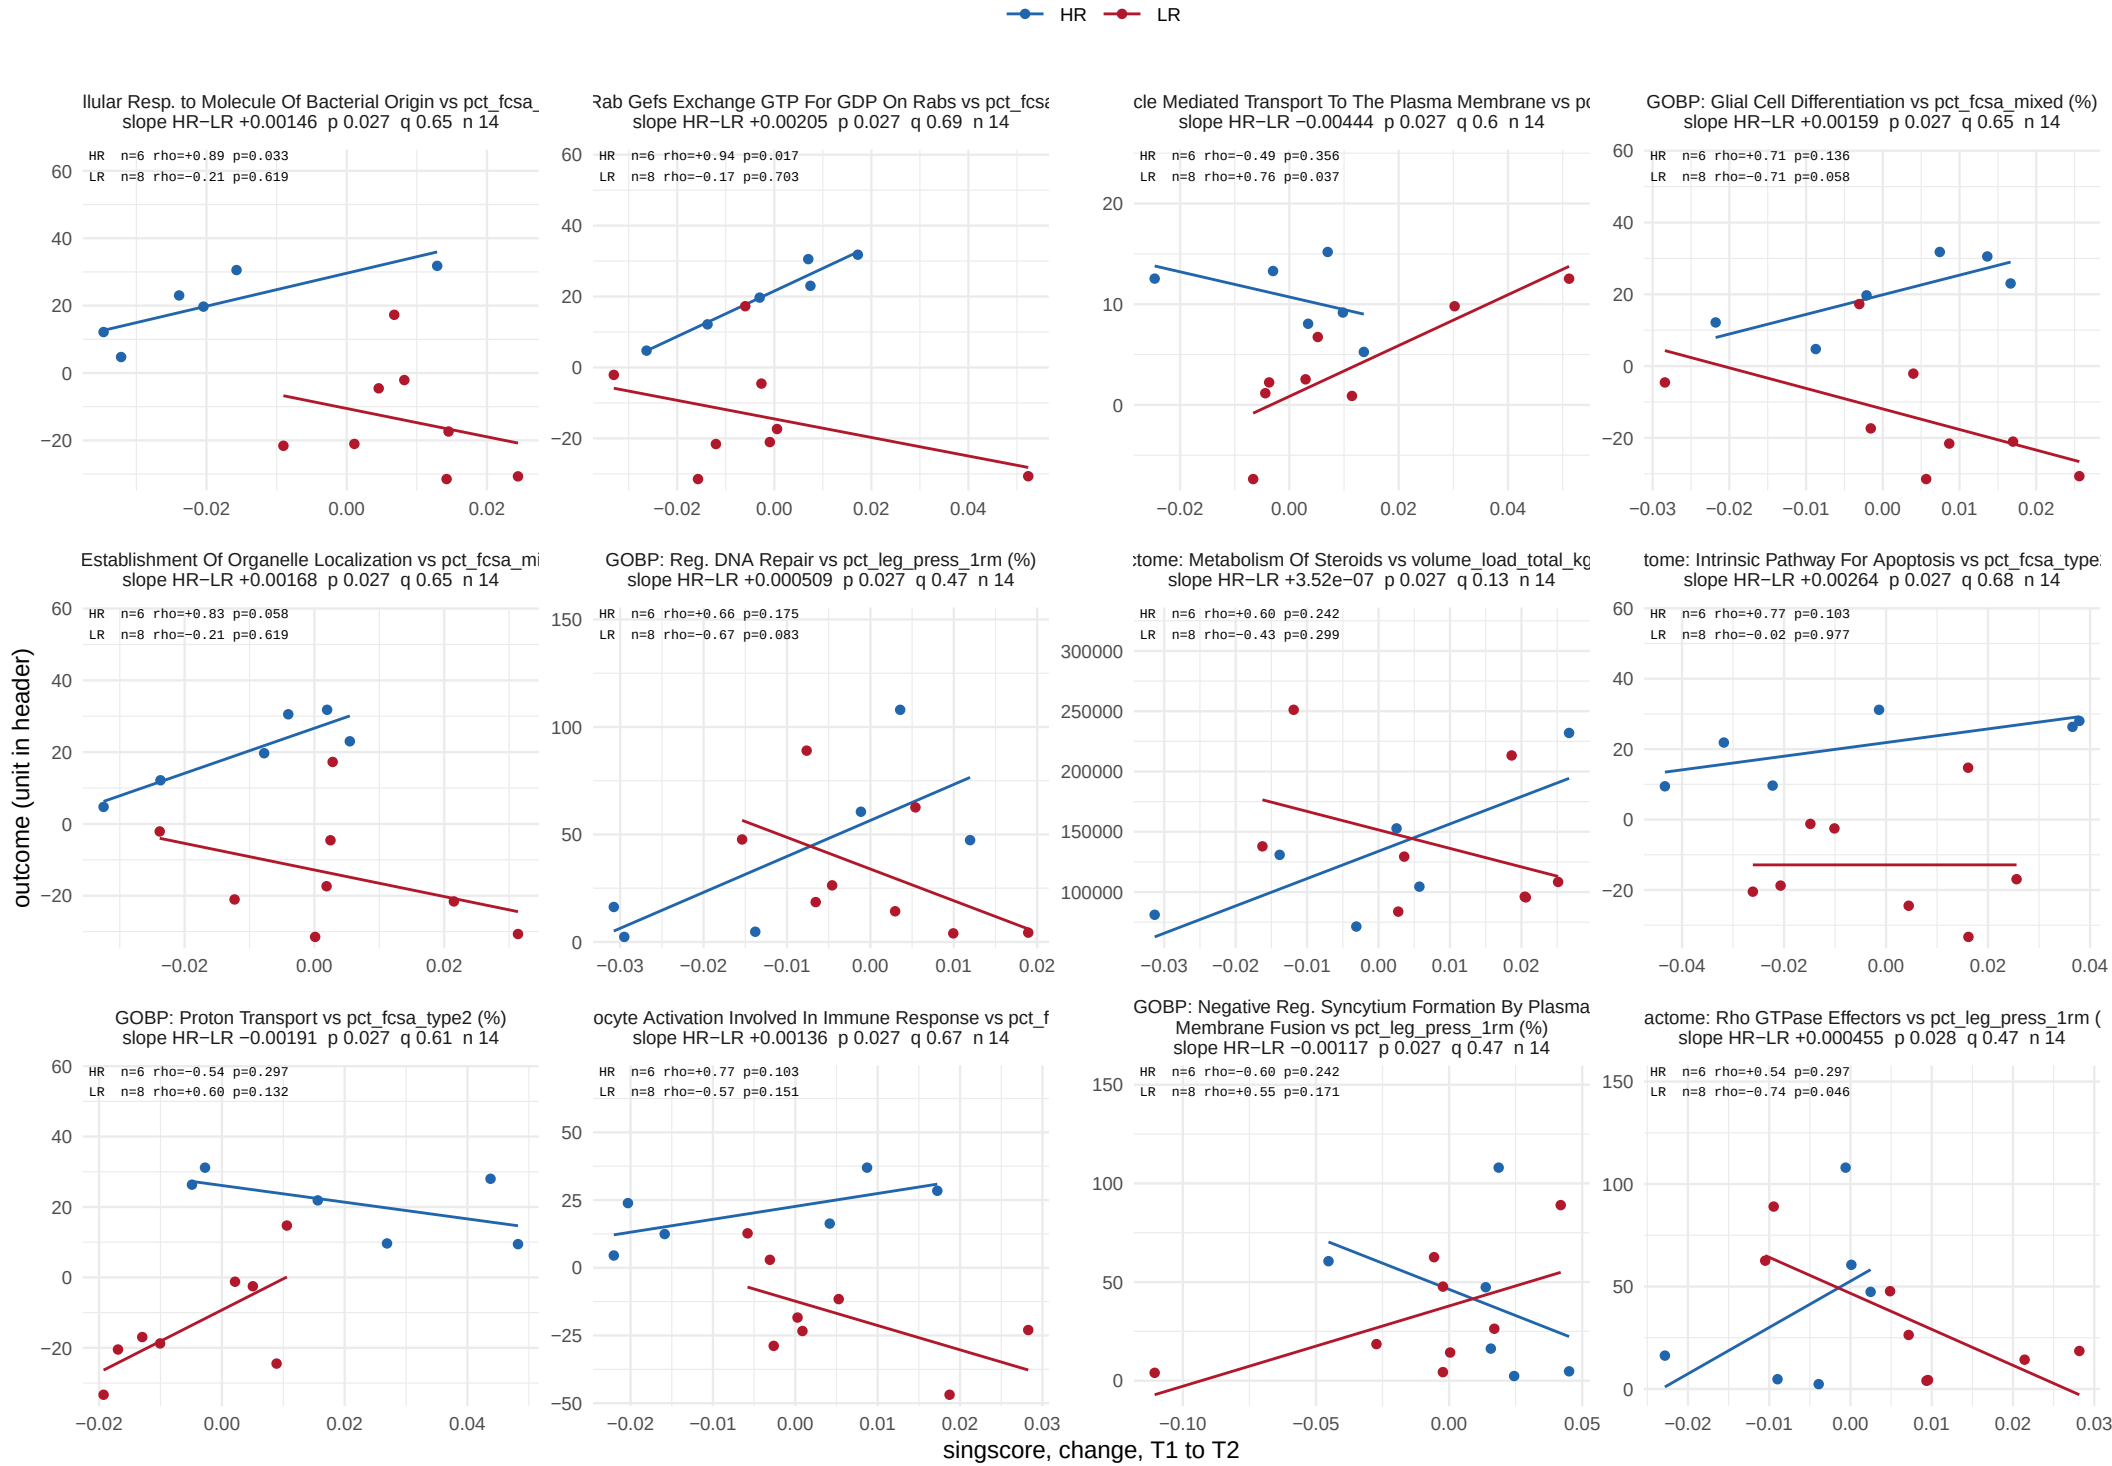

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, training window


604 of 9646 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 31 of 51.

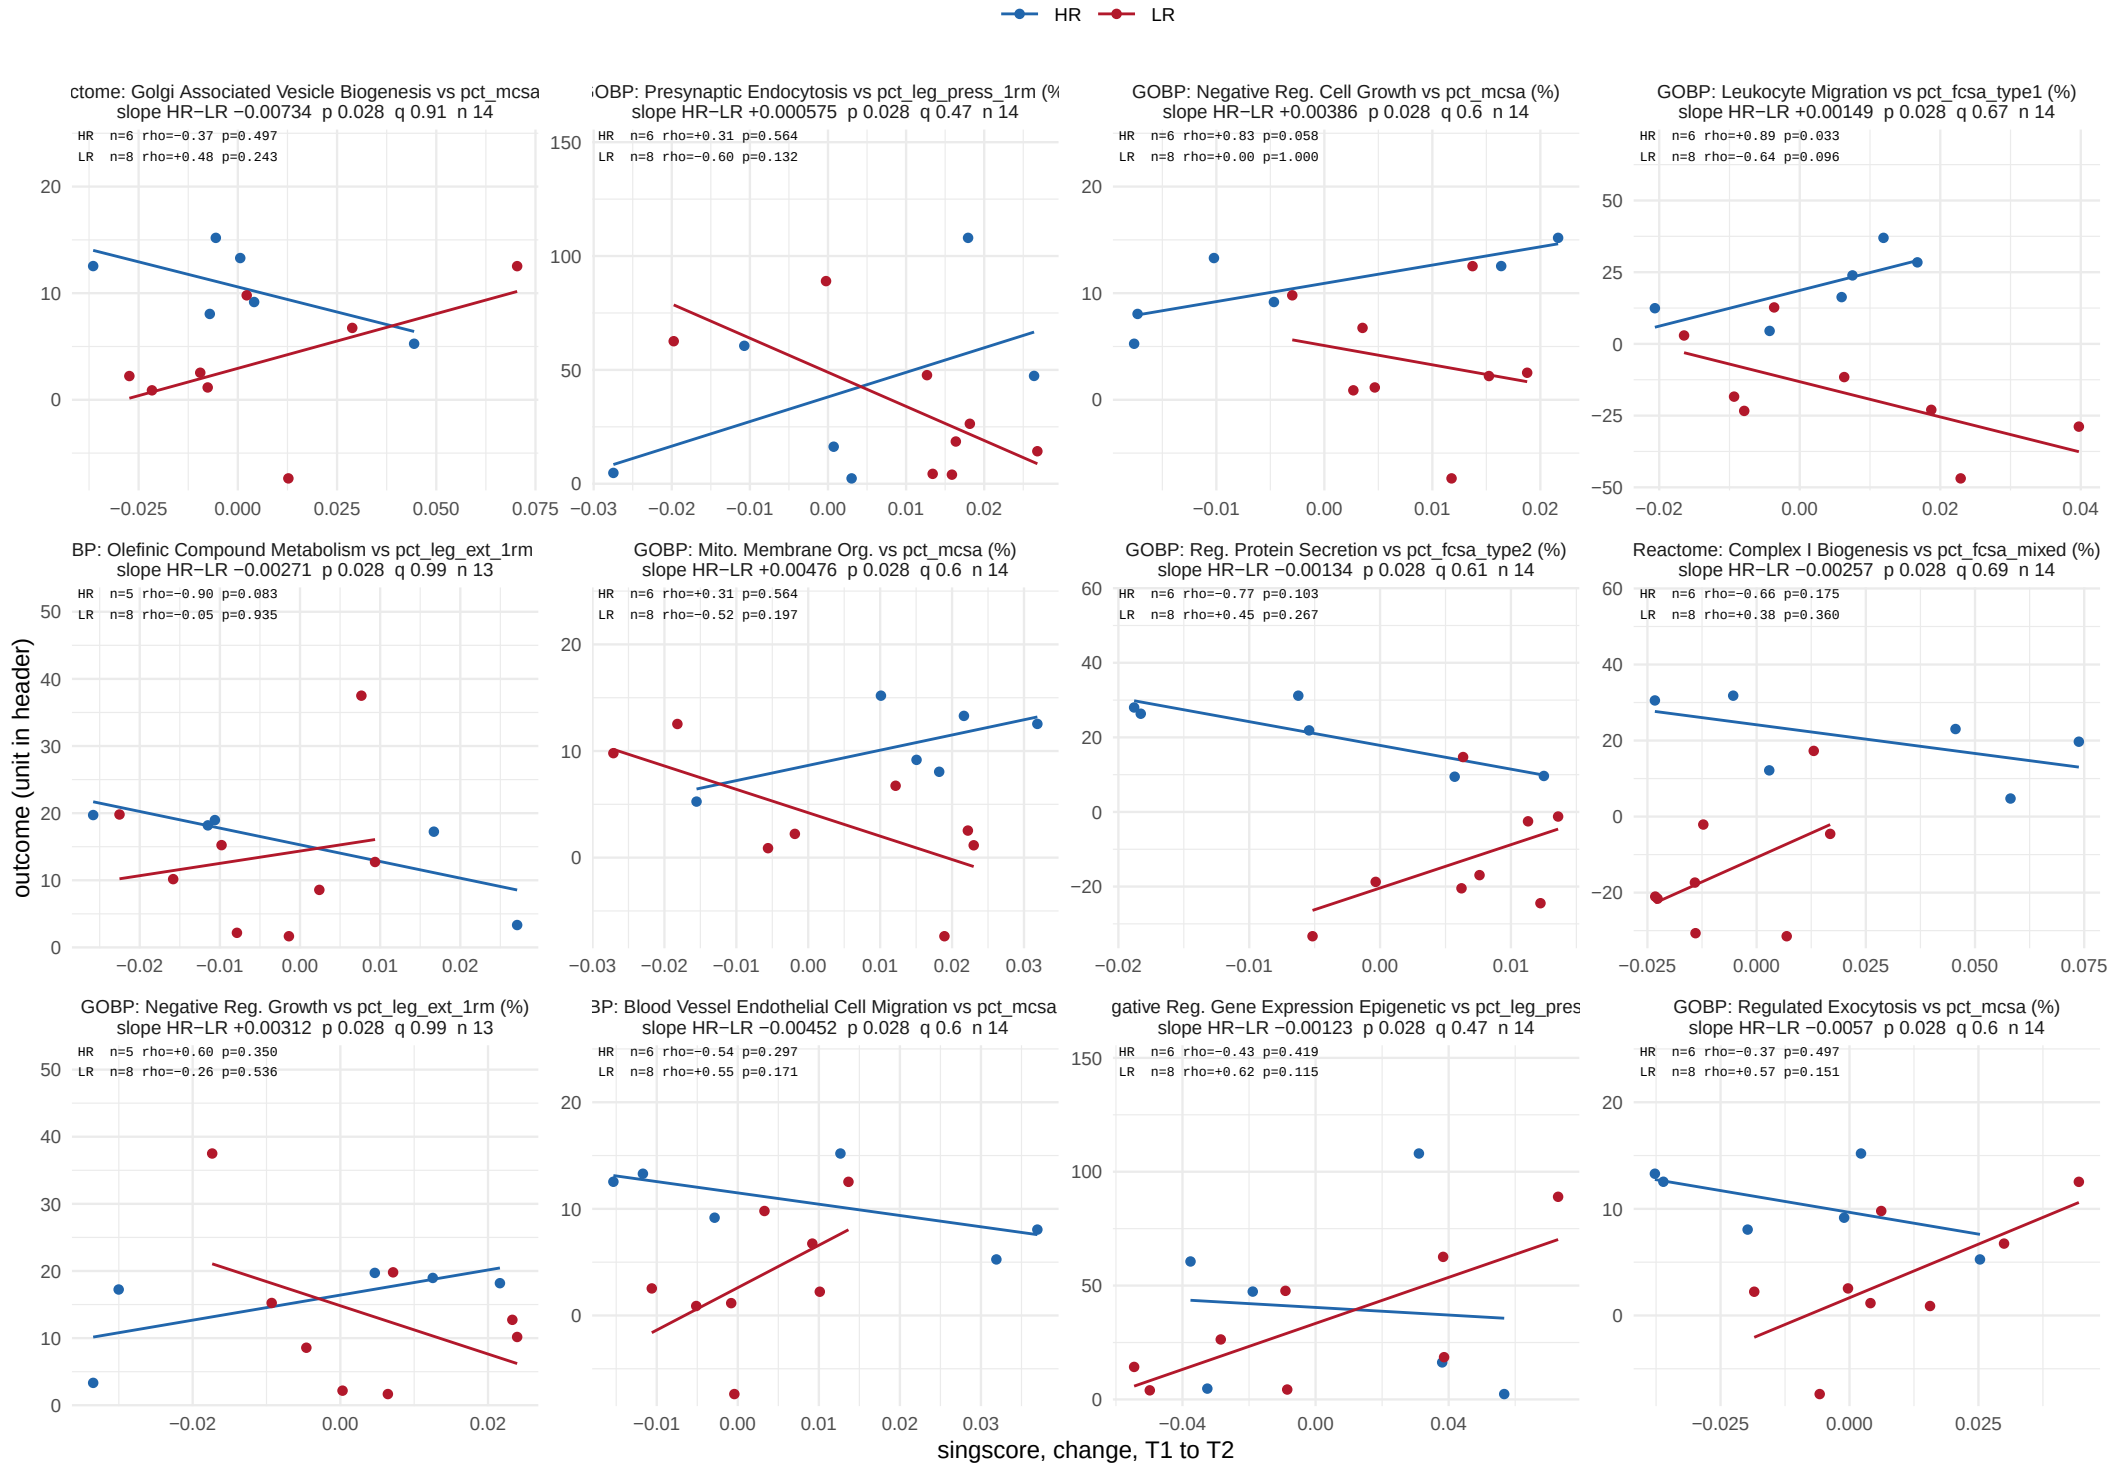

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, training window


604 of 9646 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 32 of 51.

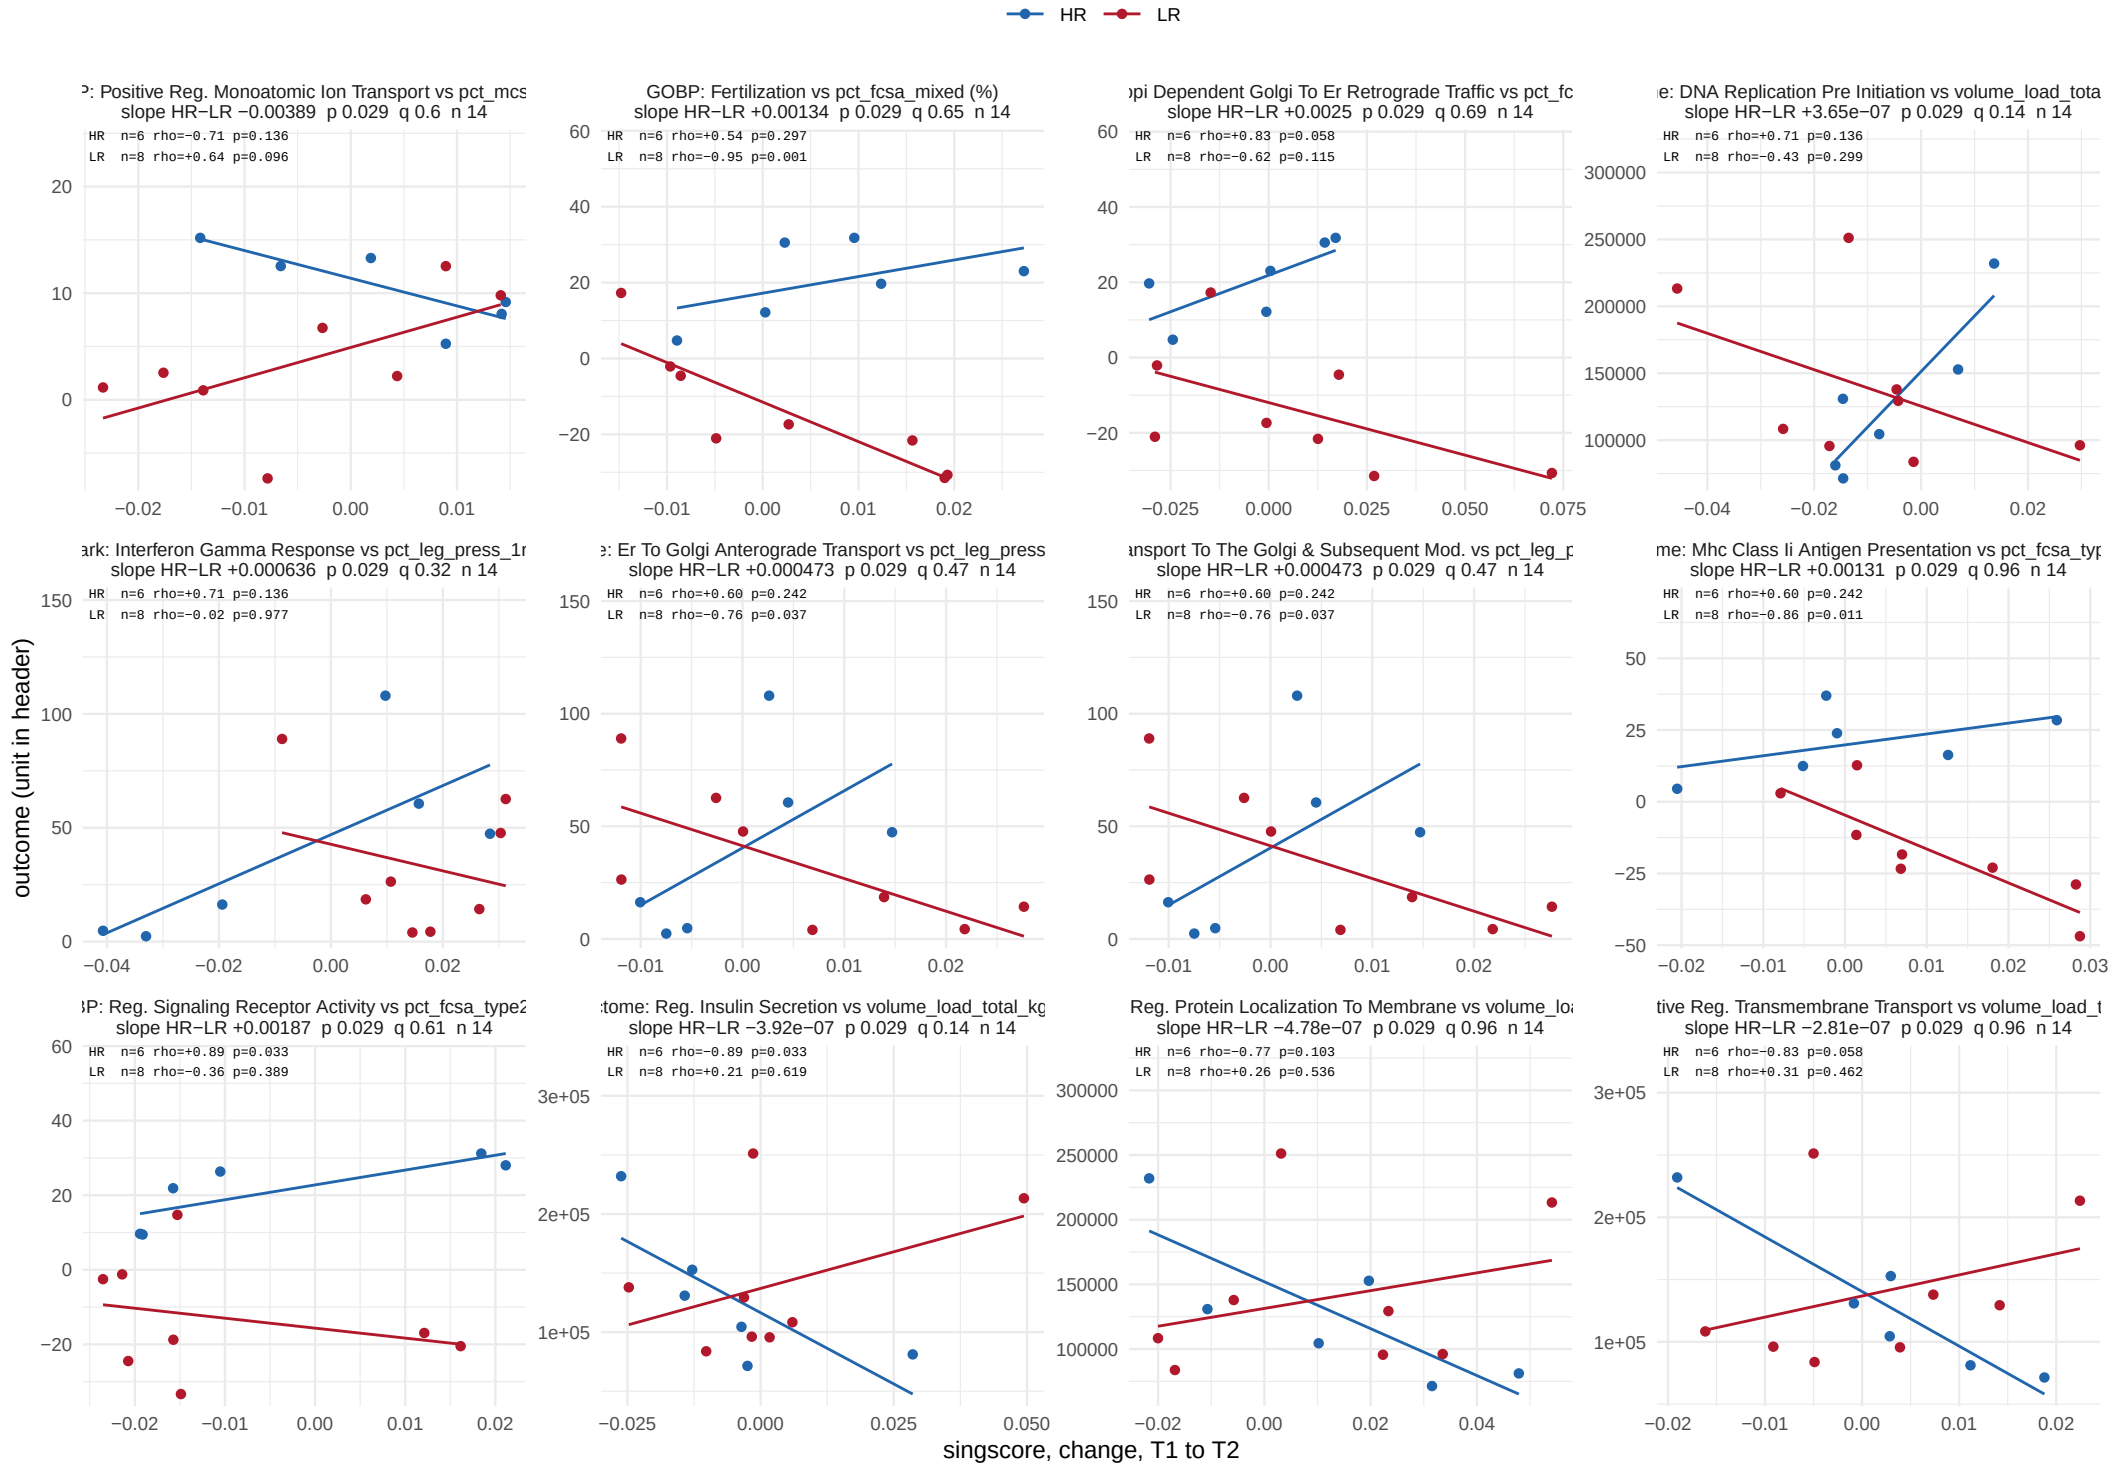

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, training window


604 of 9646 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 33 of 51.

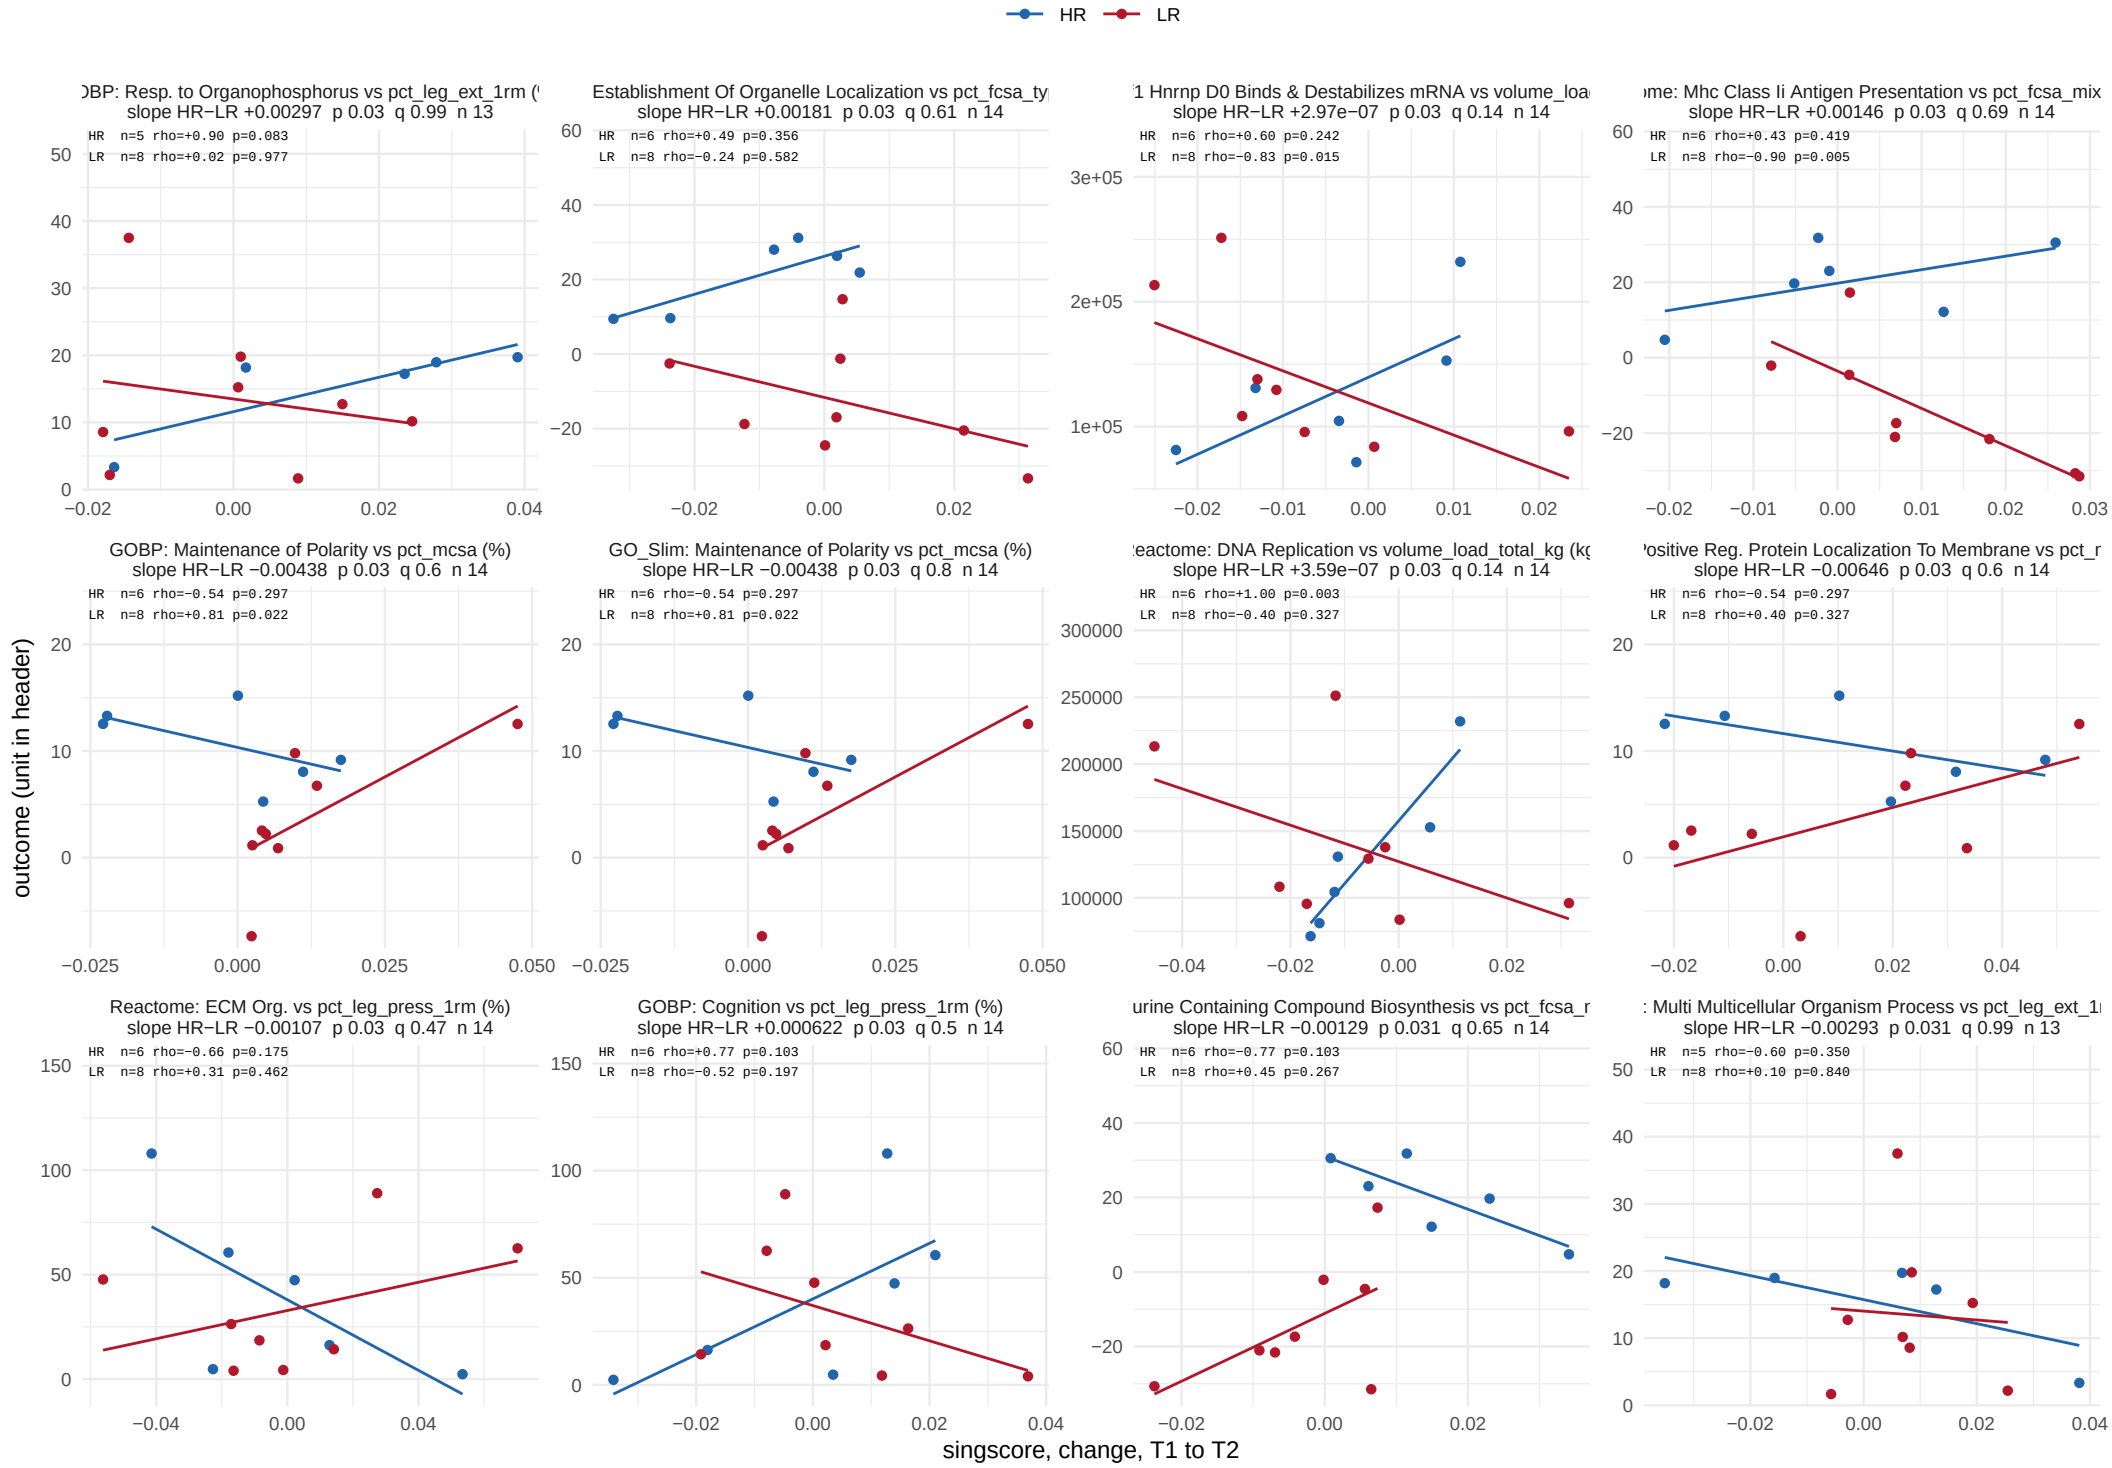

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, training window


604 of 9646 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 34 of 51.

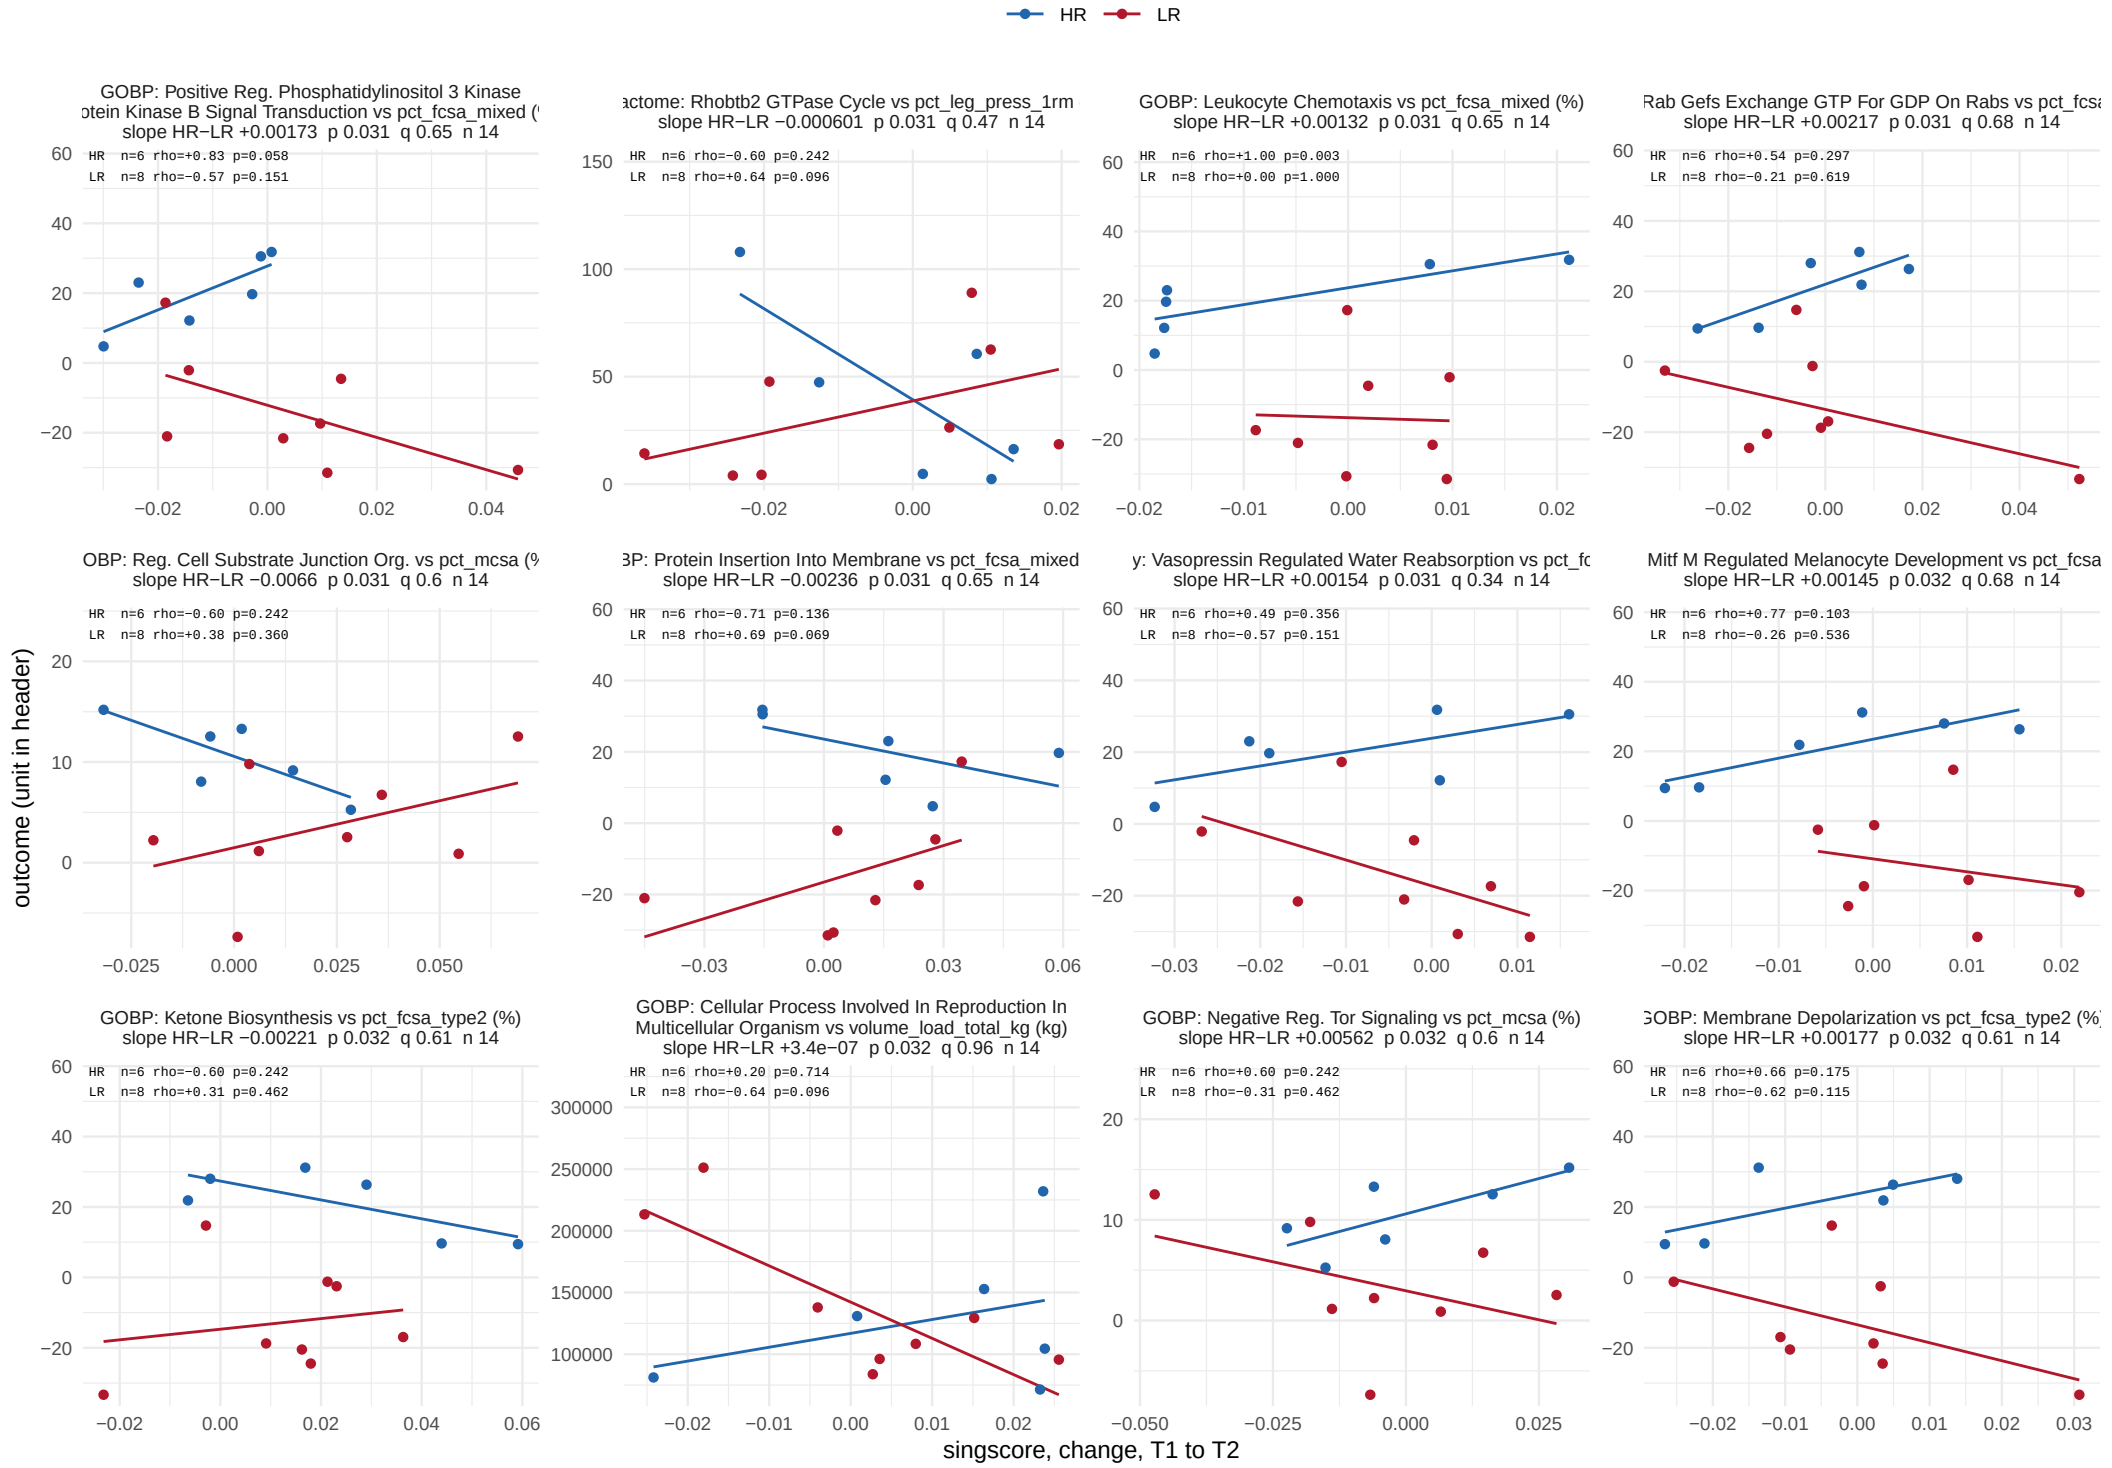

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, training window


604 of 9646 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 35 of 51.

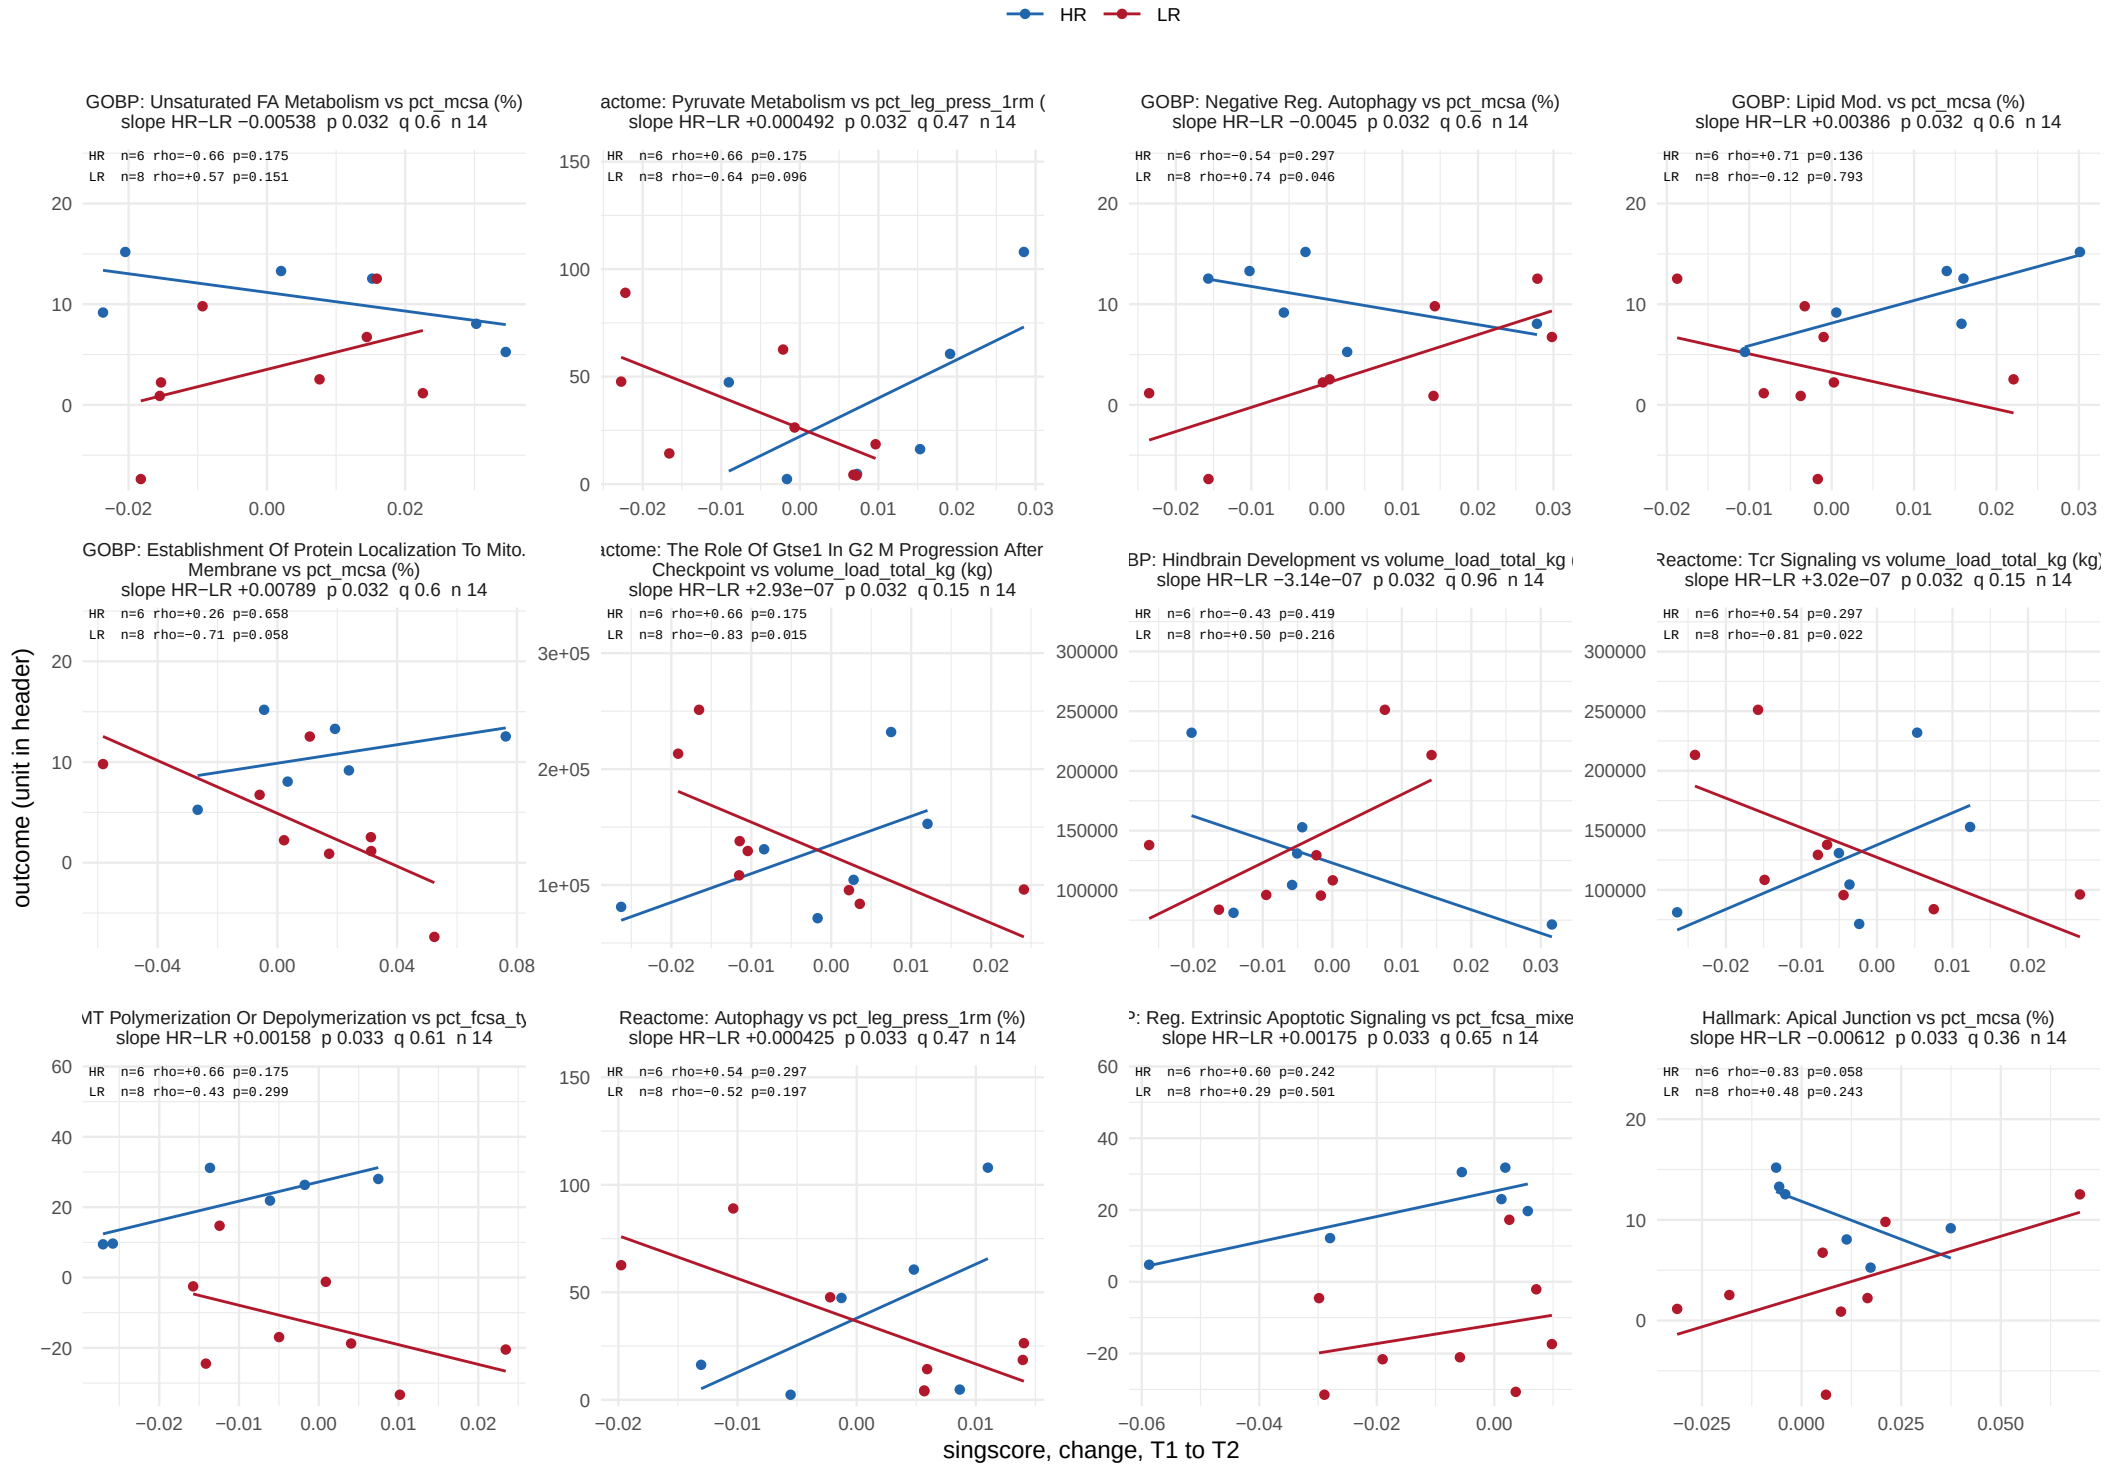

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, training window


604 of 9646 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 36 of 51.

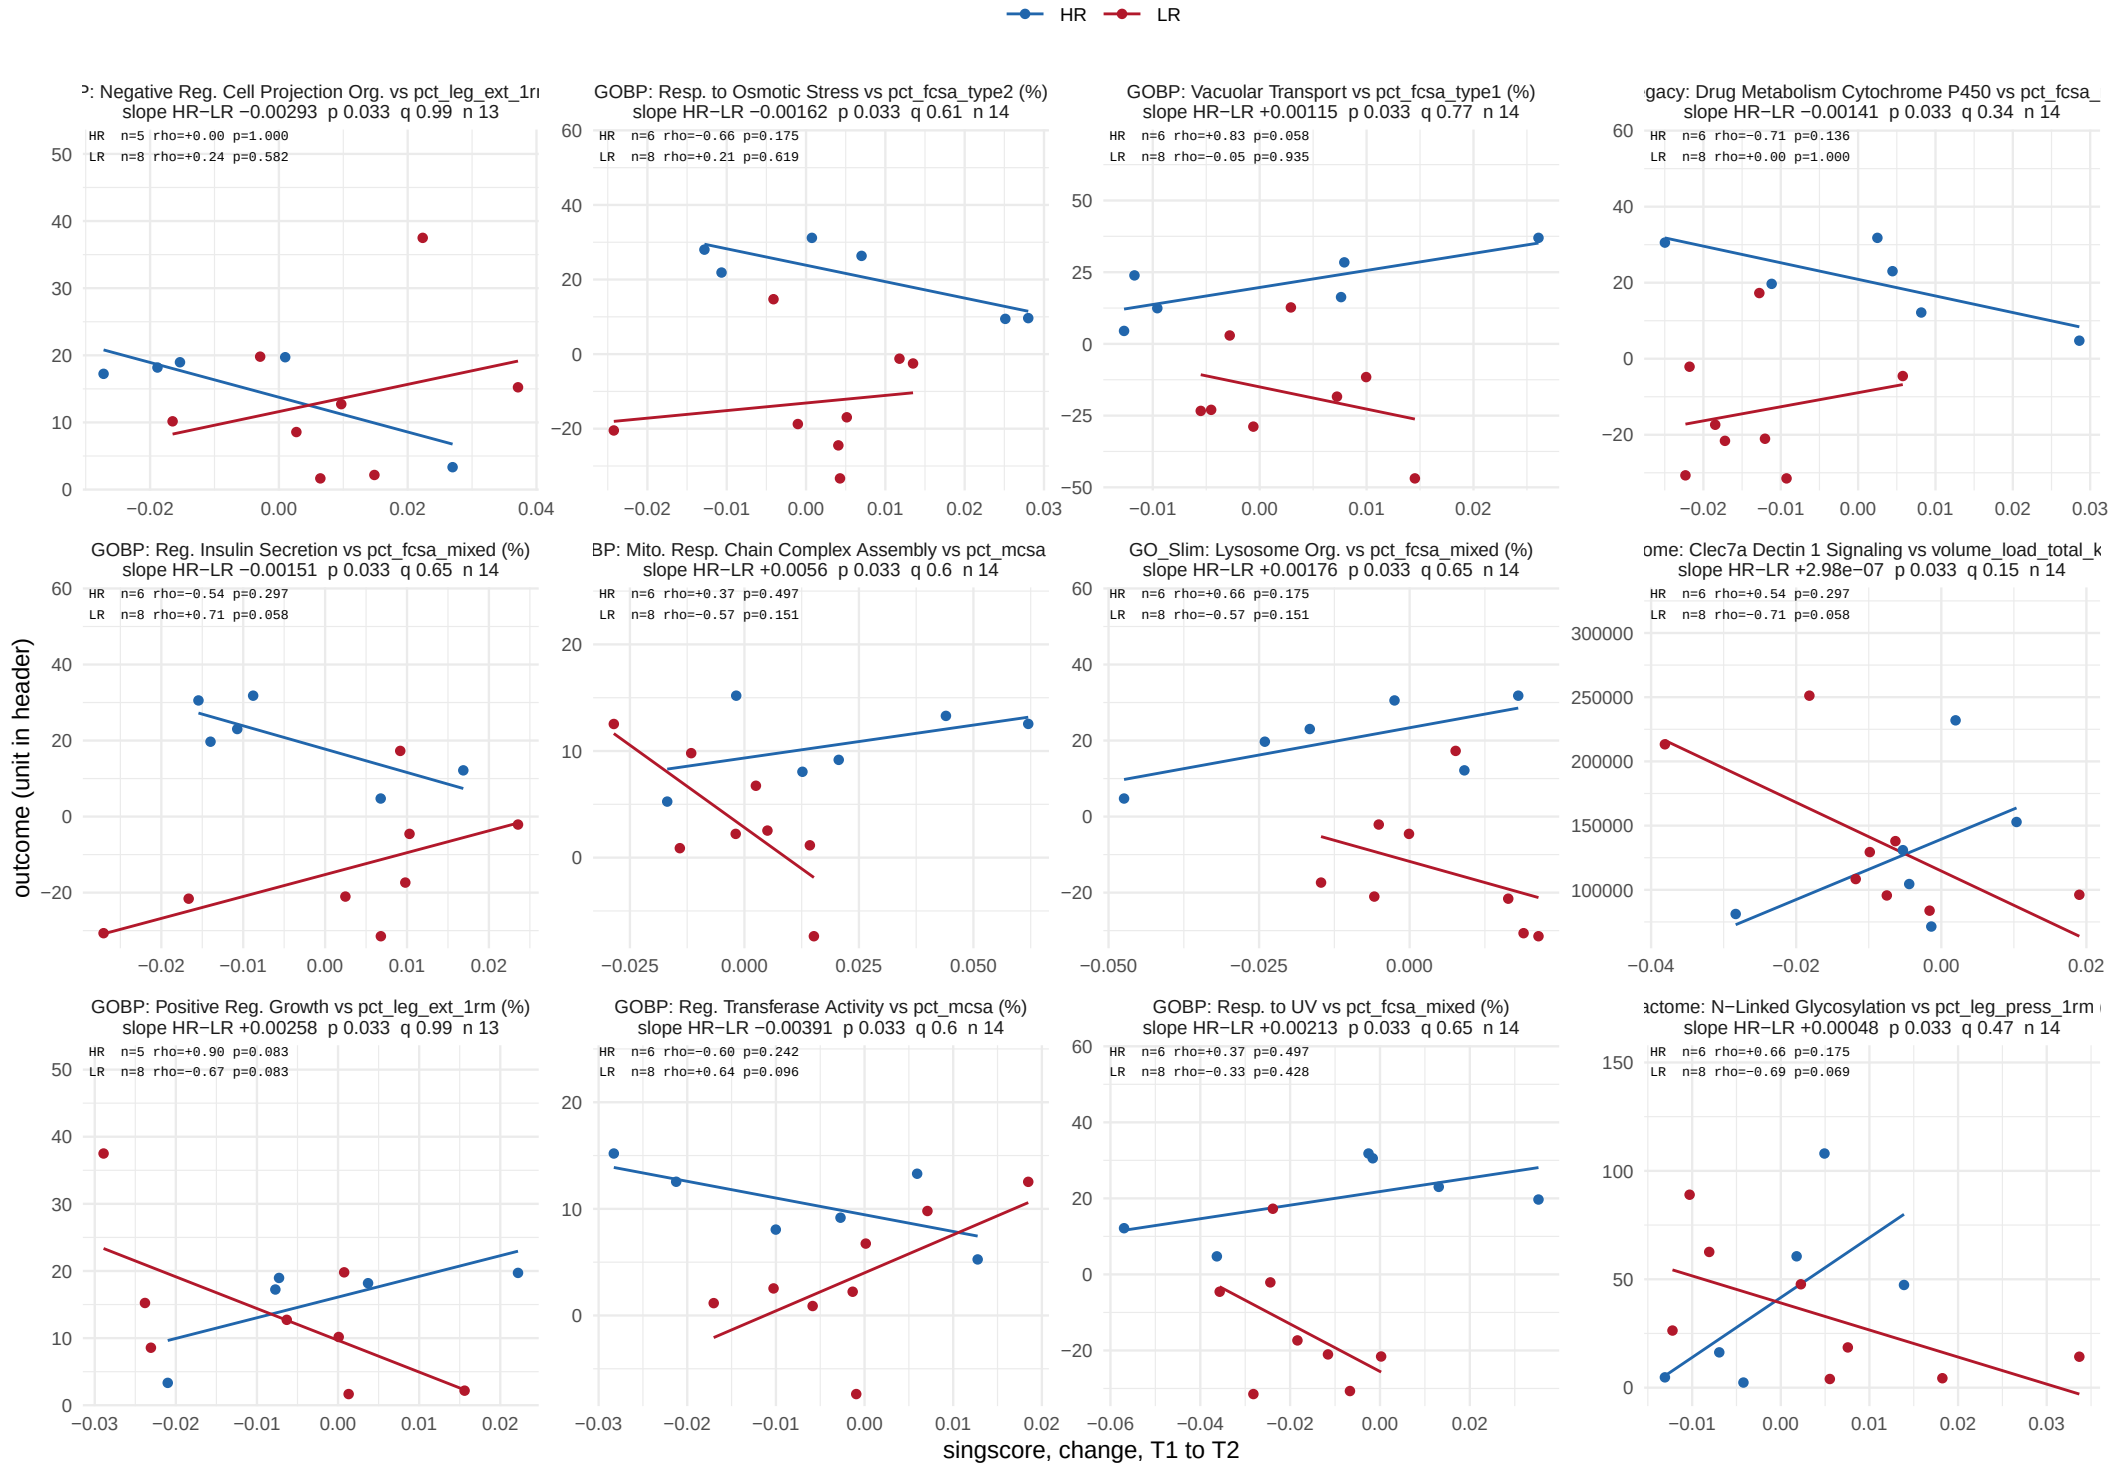

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, training window


604 of 9646 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 37 of 51.

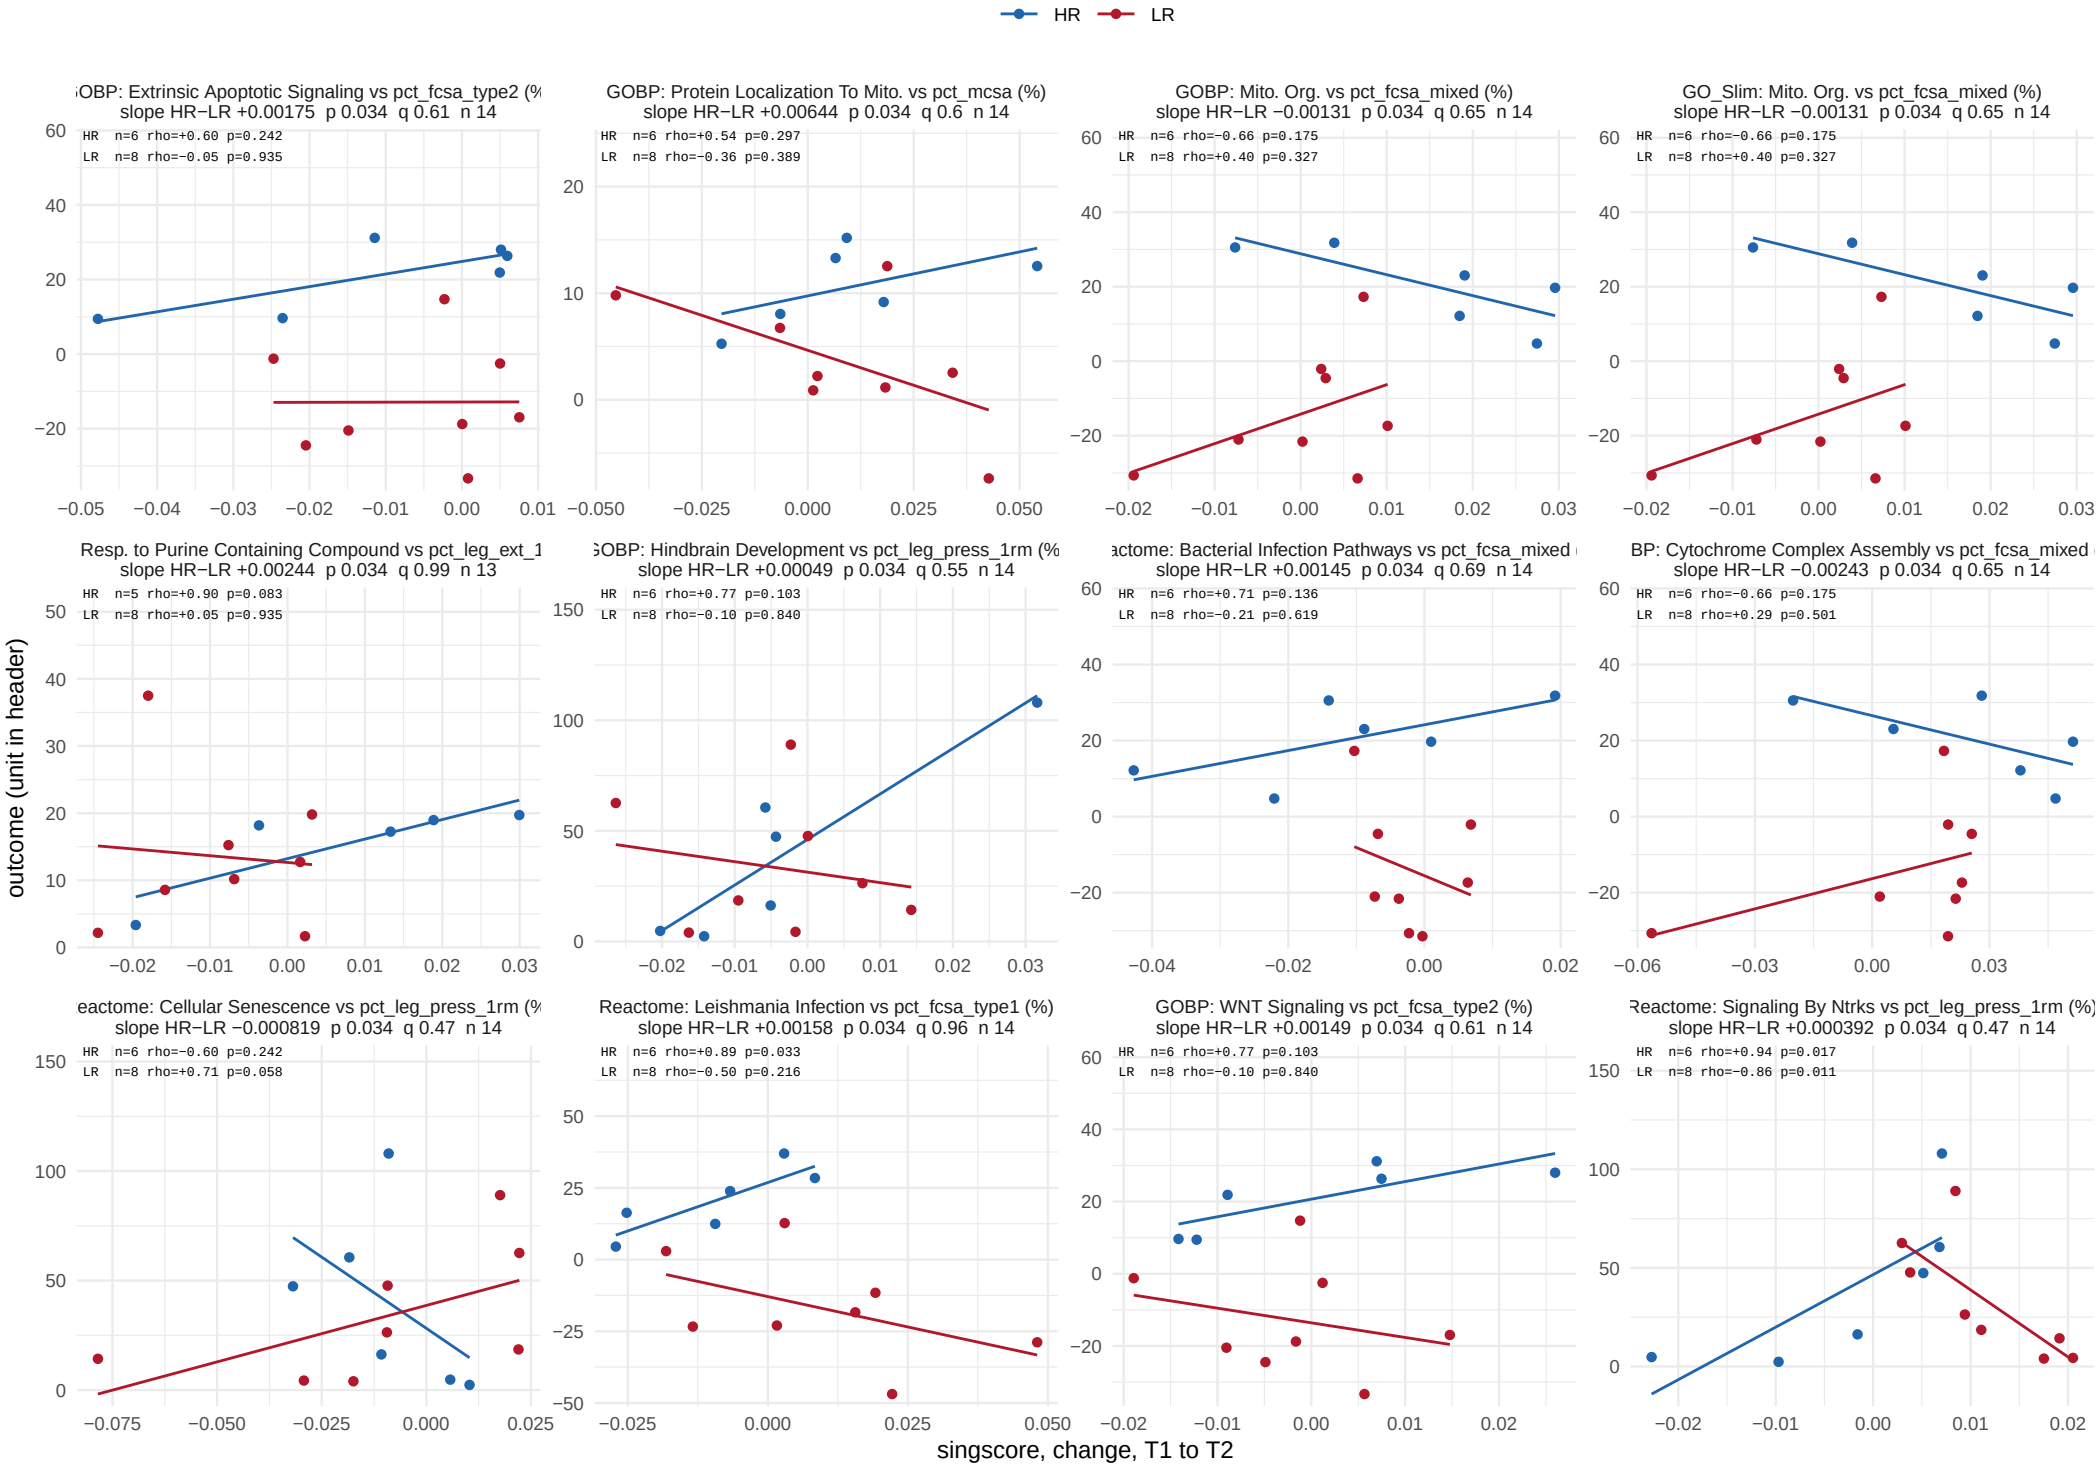

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, training window


604 of 9646 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 38 of 51.

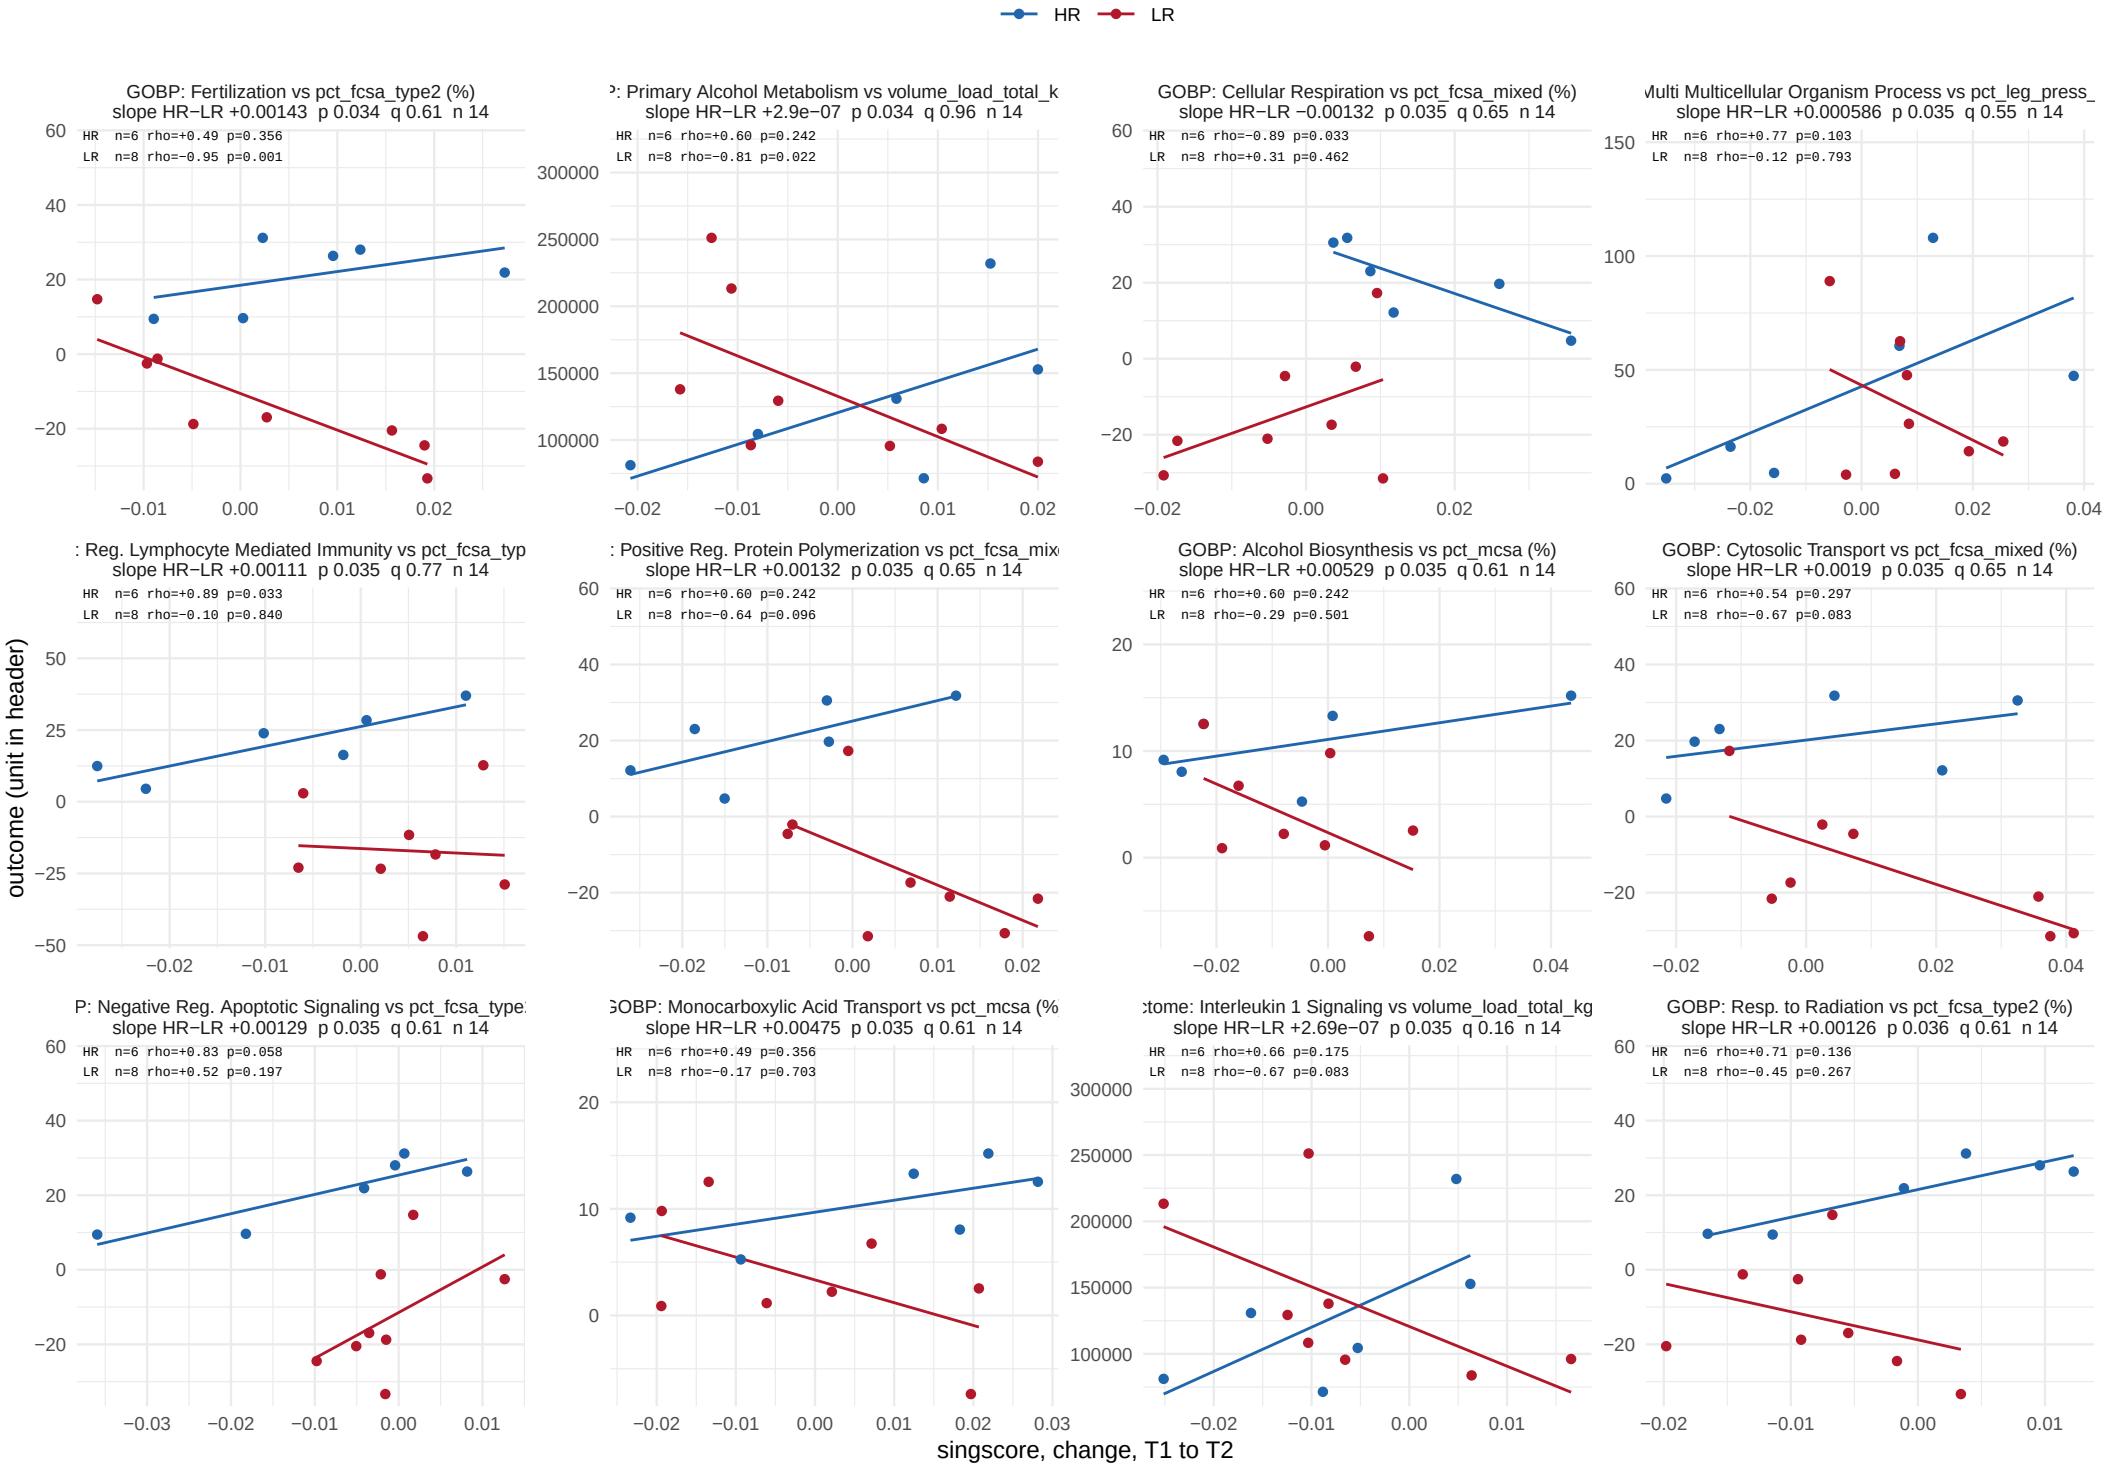

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, training window


604 of 9646 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 39 of 51.

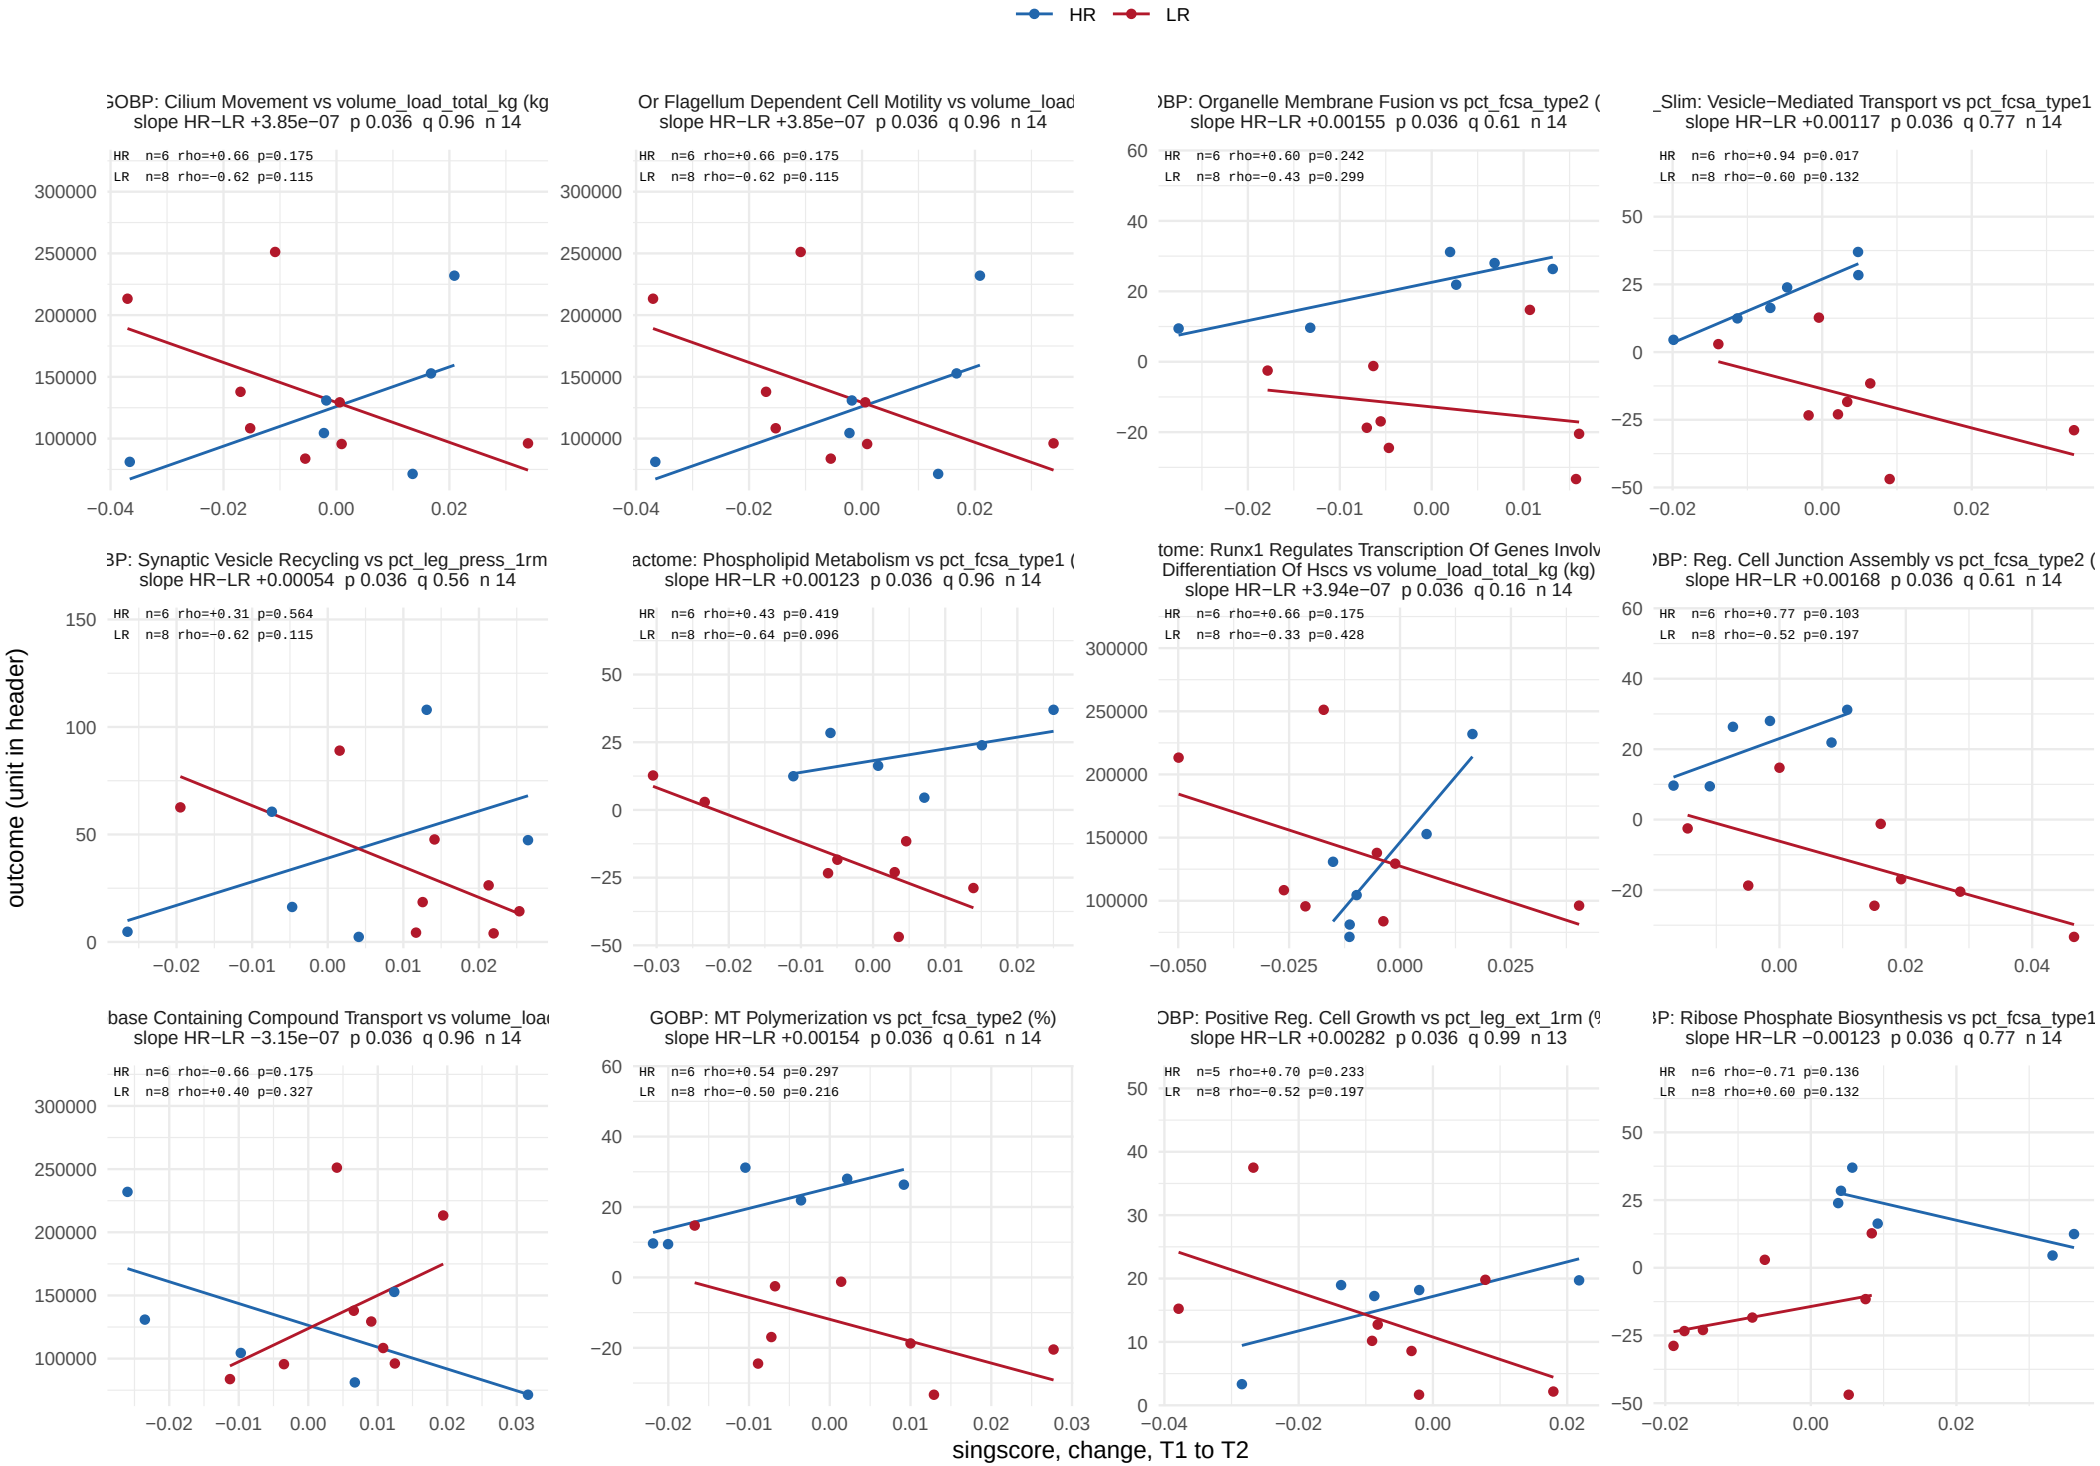

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, training window


604 of 9646 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 40 of 51.

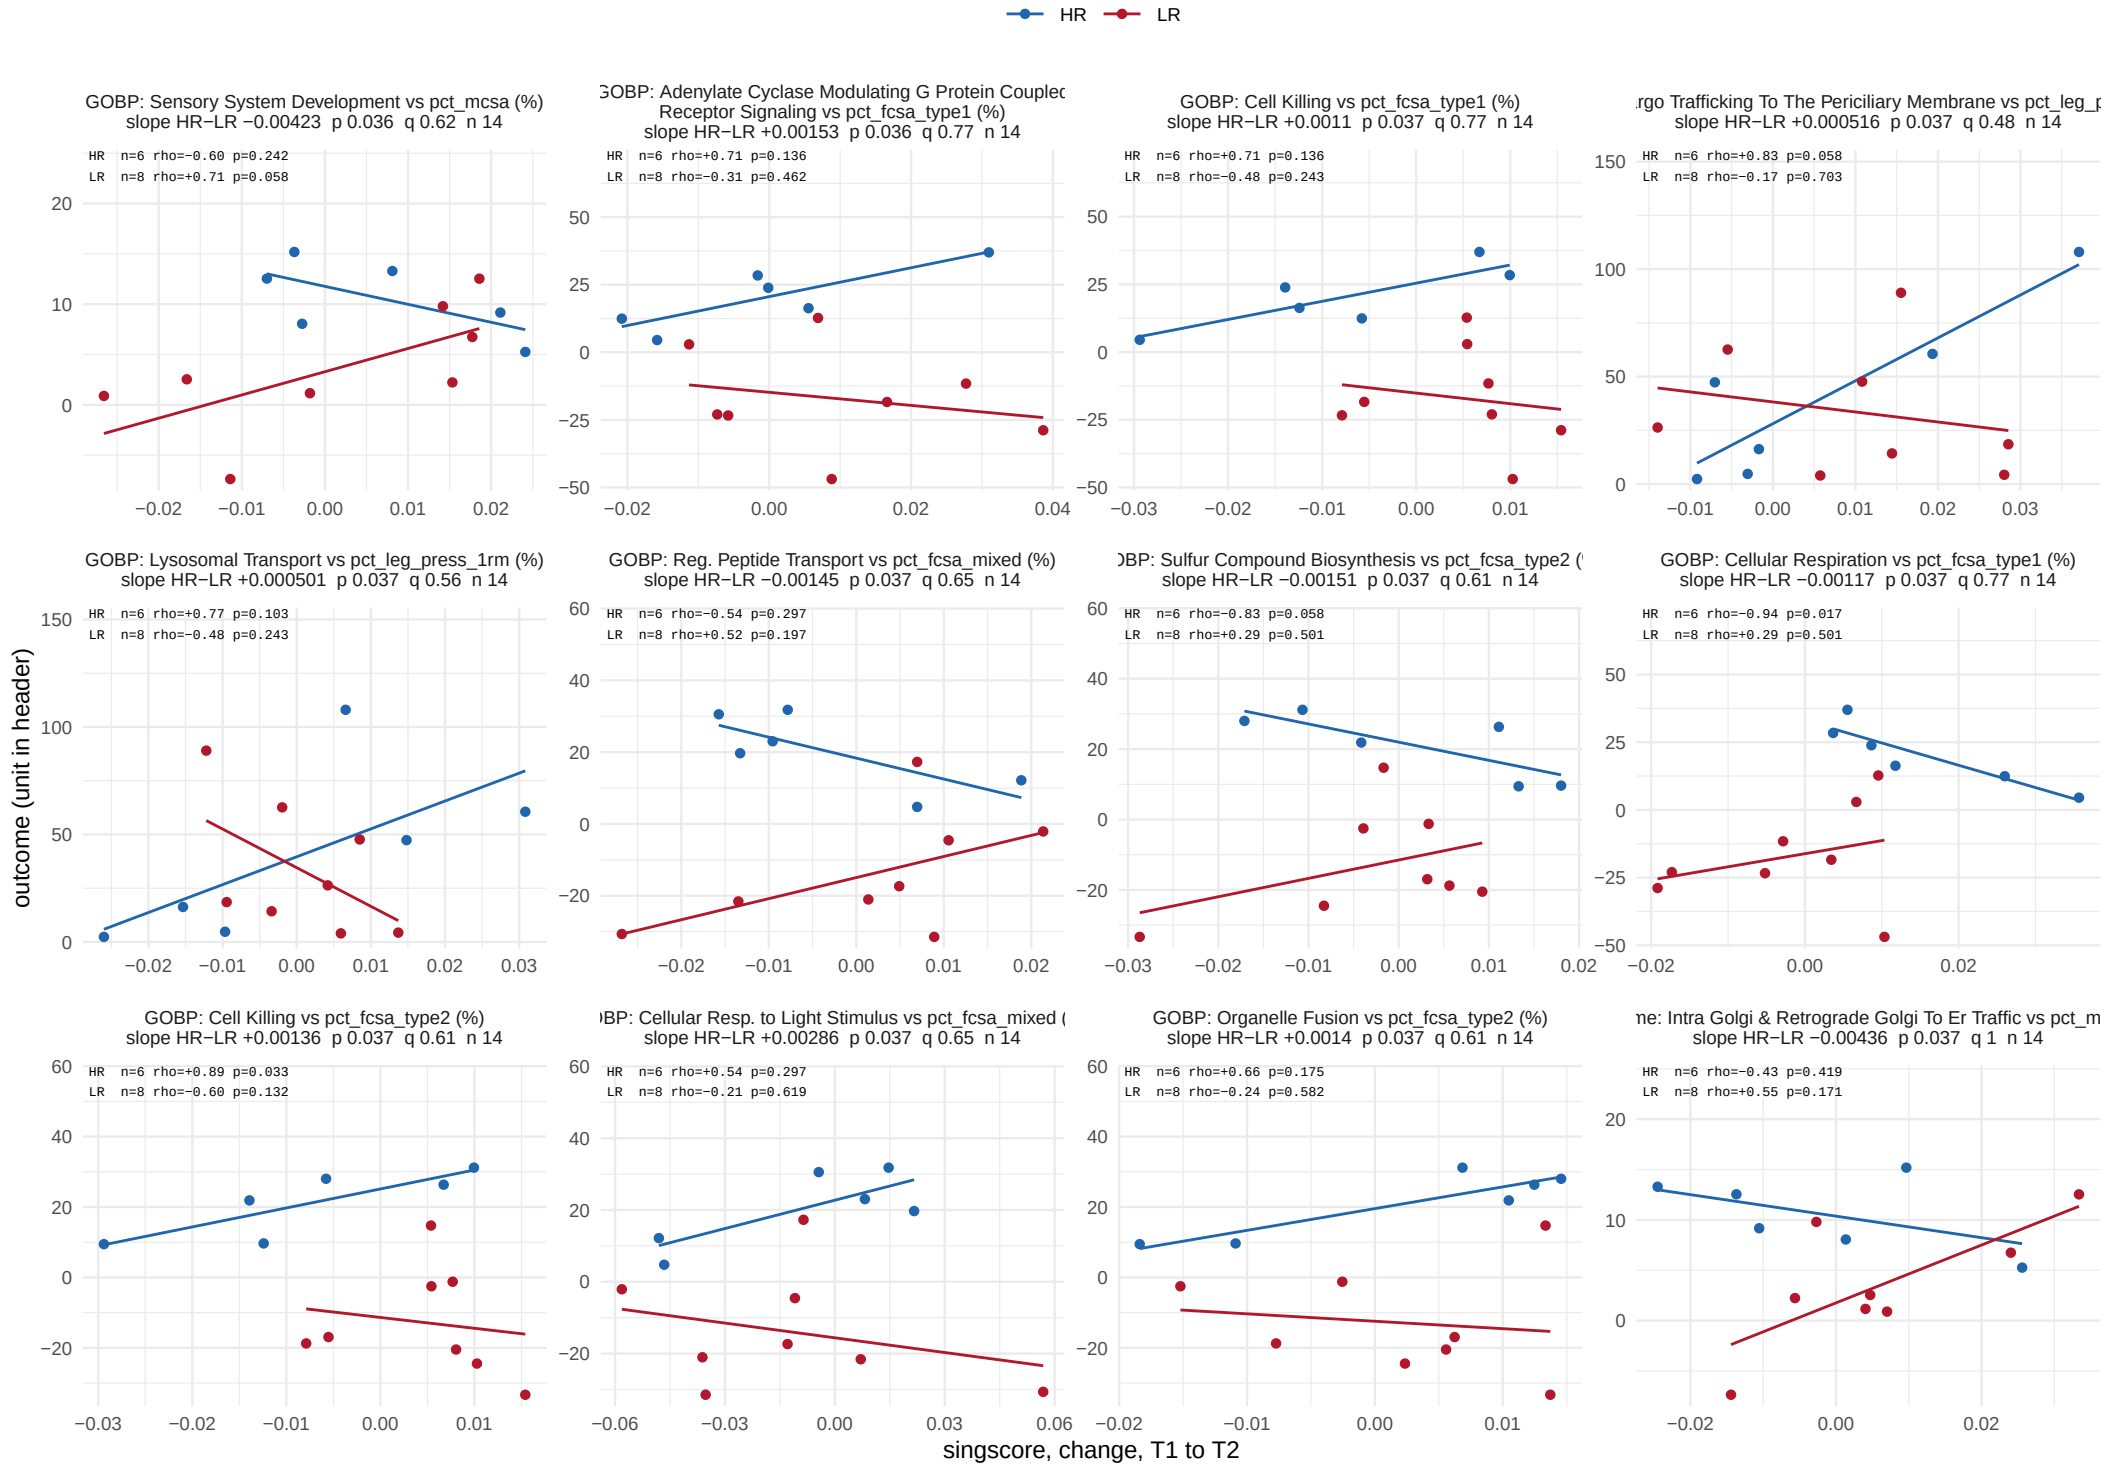

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, training window


604 of 9646 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 41 of 51.

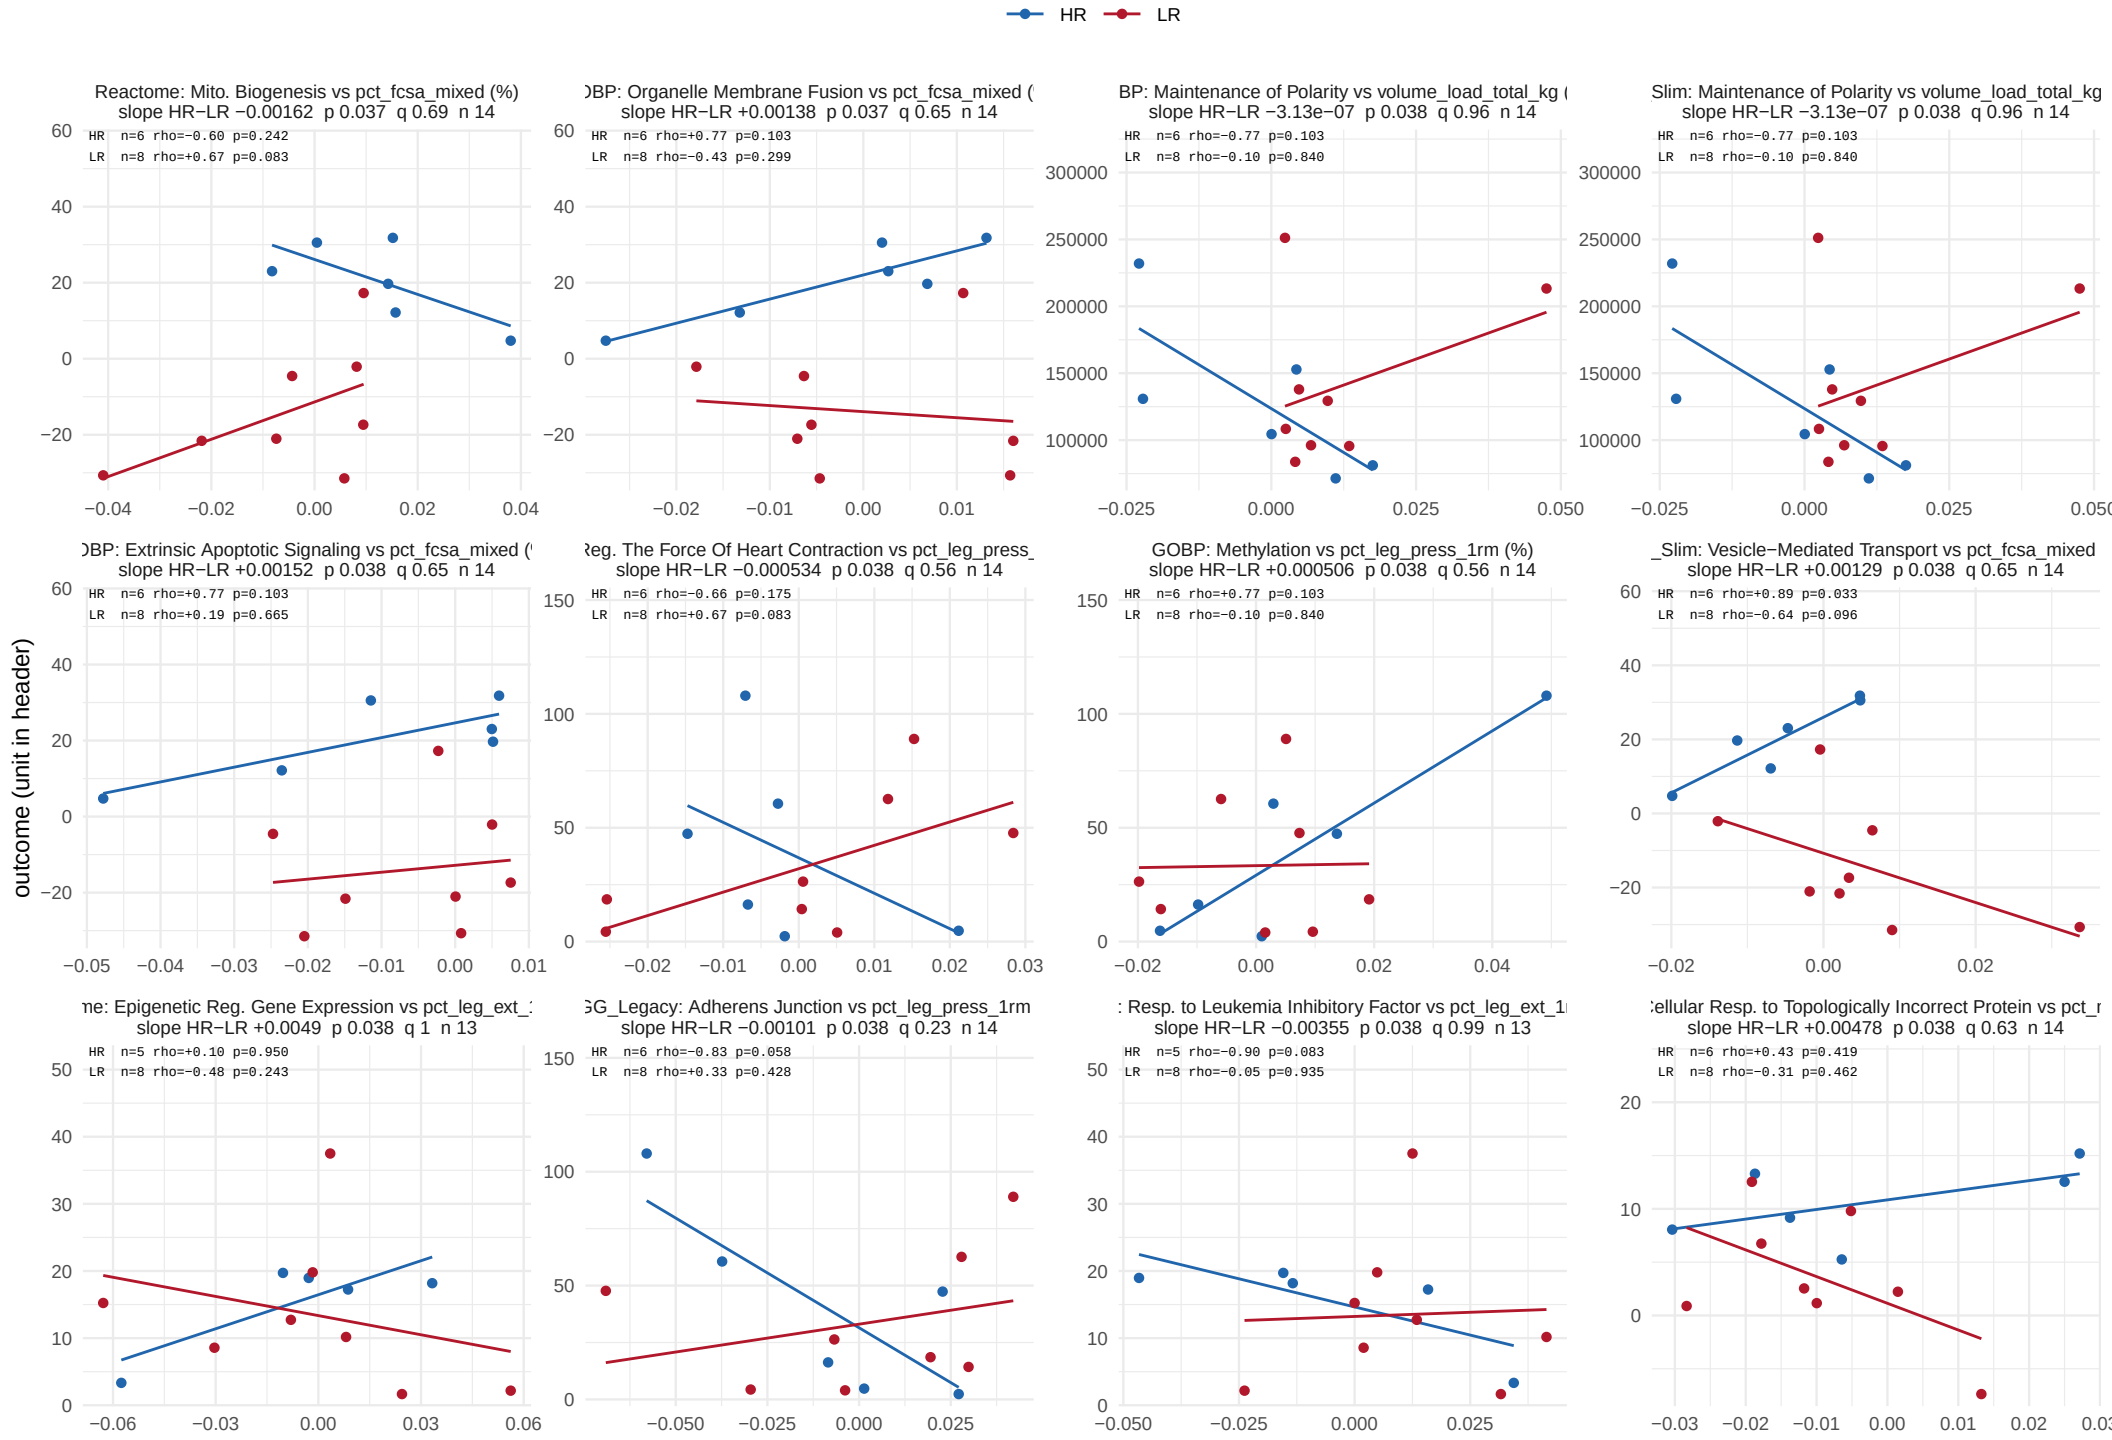

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, training window


604 of 9646 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 42 of 51.

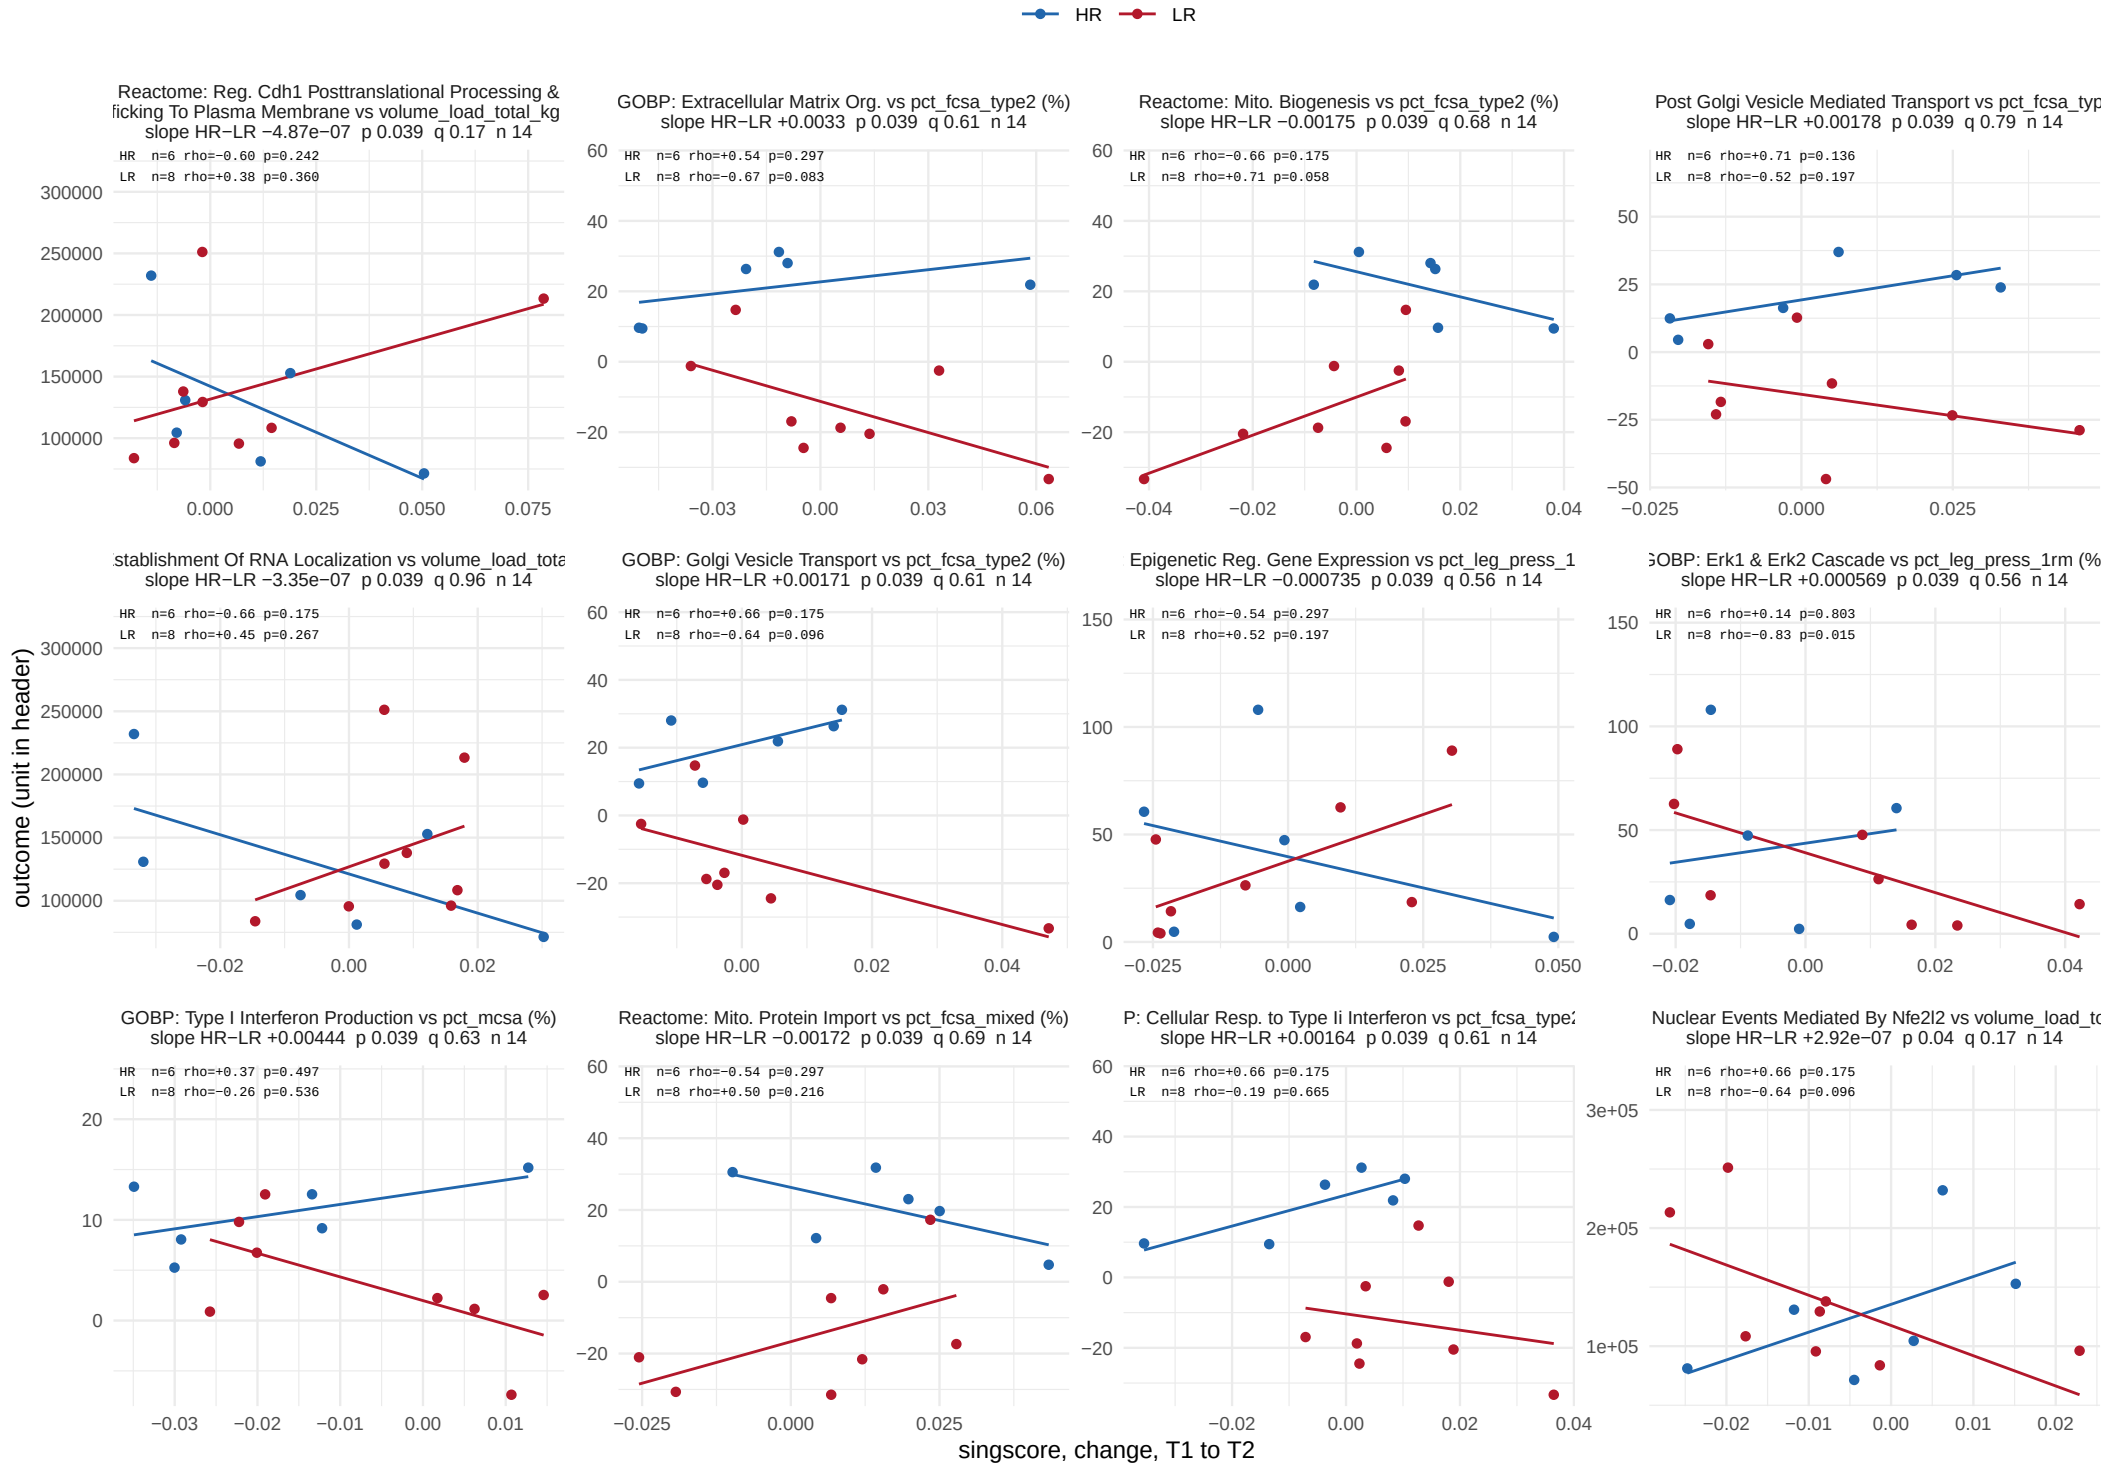

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, training window


604 of 9646 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 43 of 51.

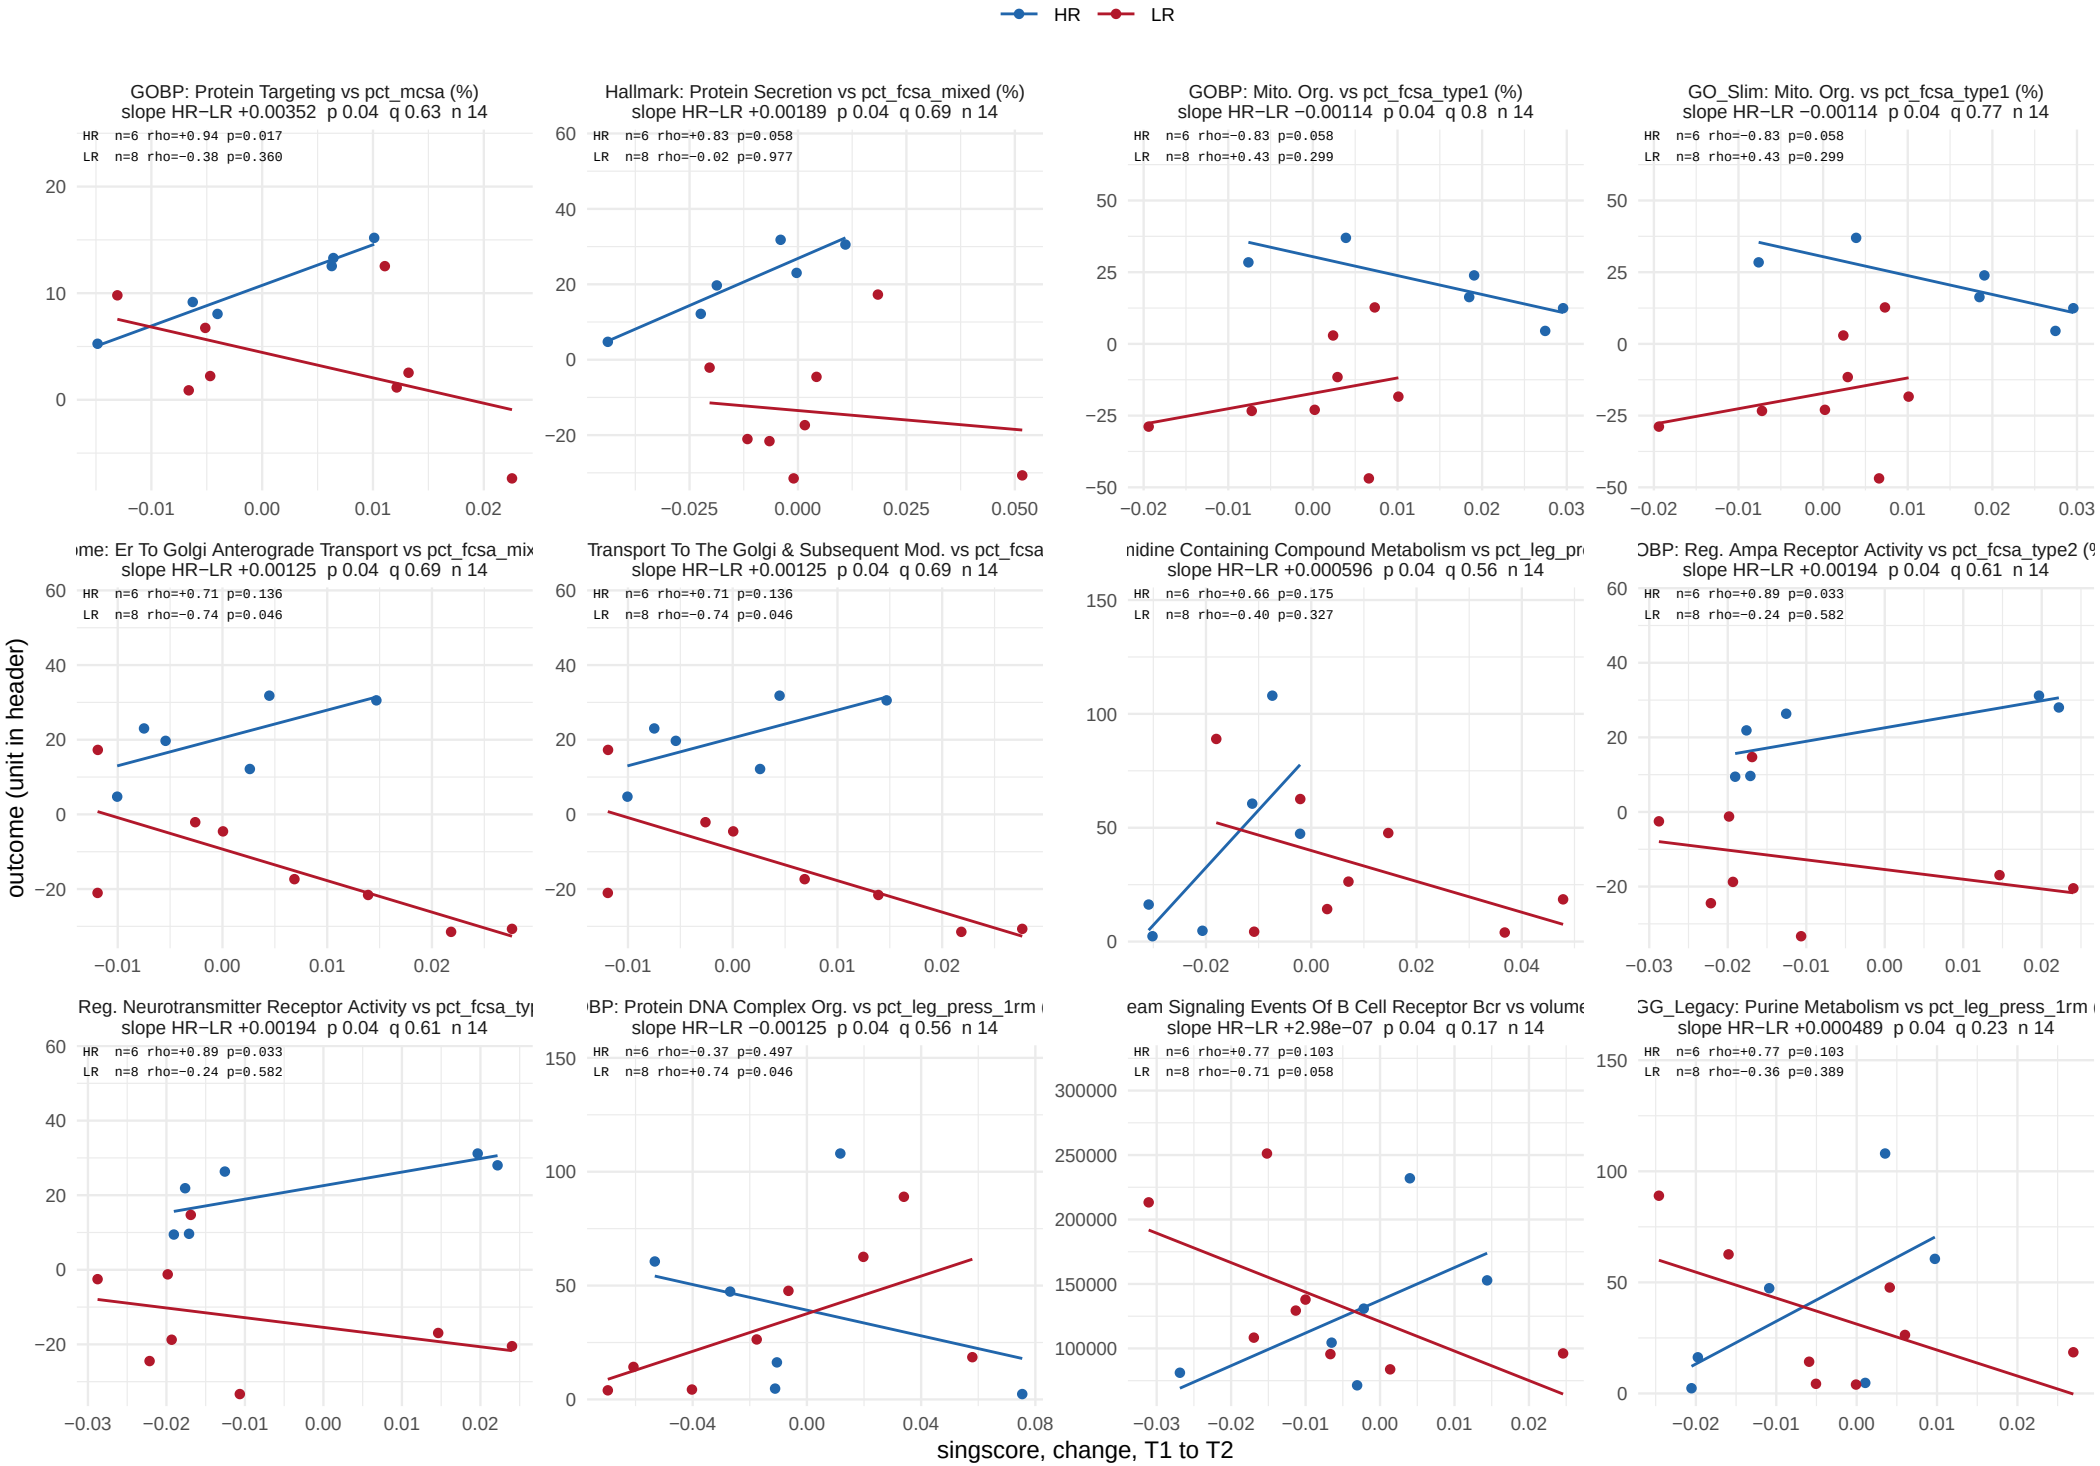

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, training window


604 of 9646 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 44 of 51.

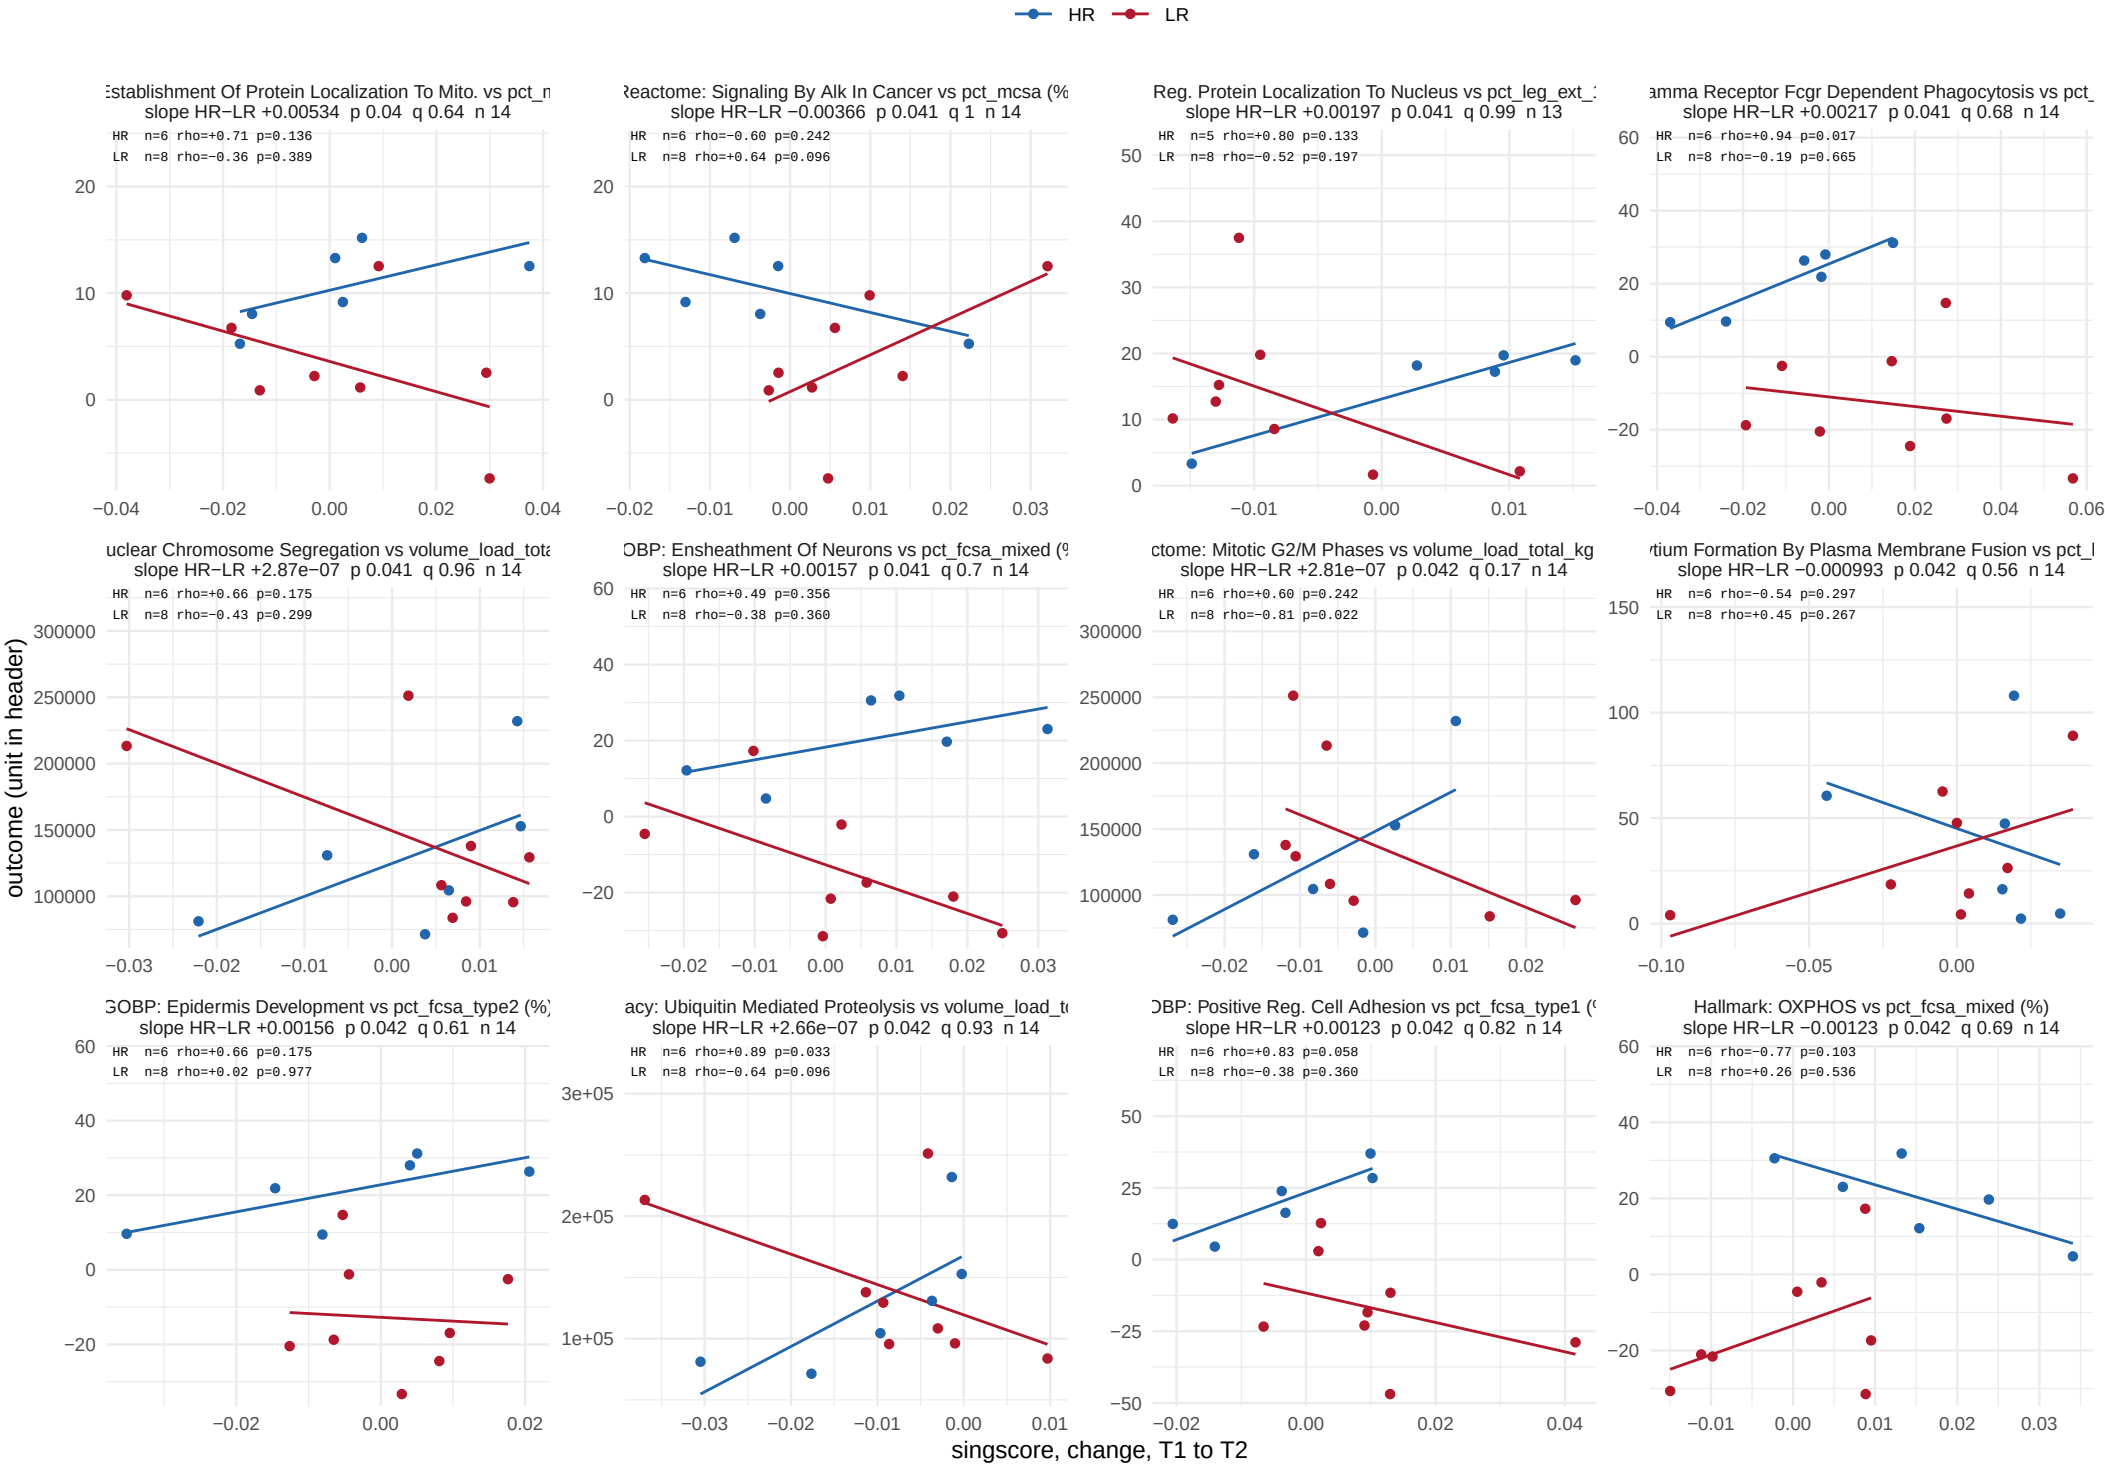

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, training window


604 of 9646 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 45 of 51.

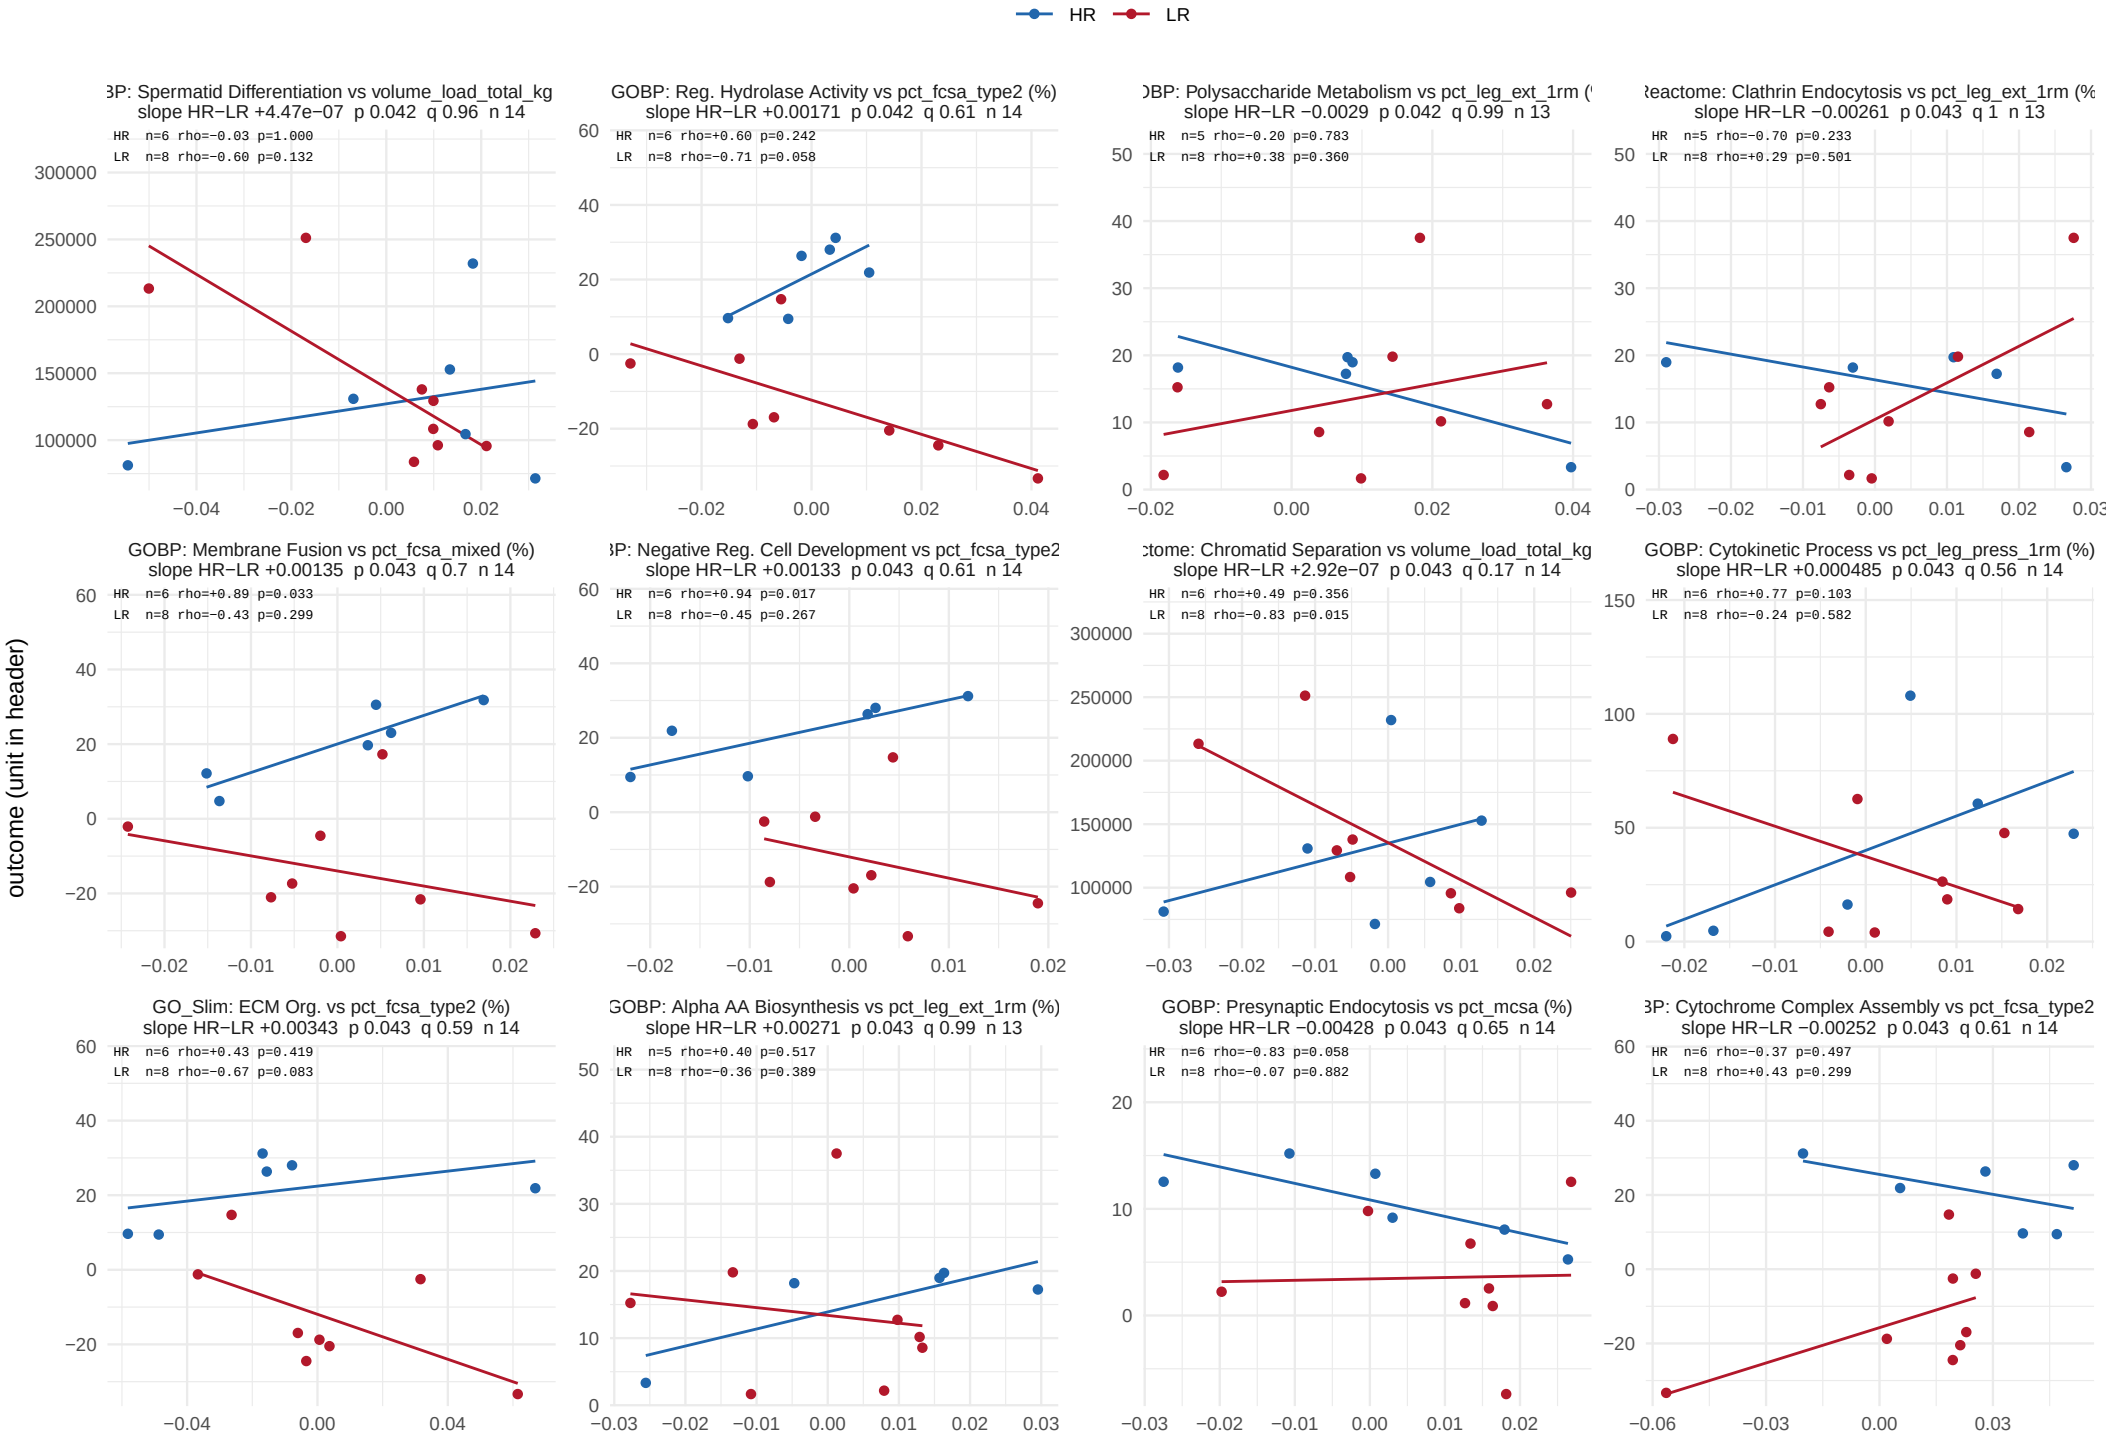

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, training window


604 of 9646 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 46 of 51.

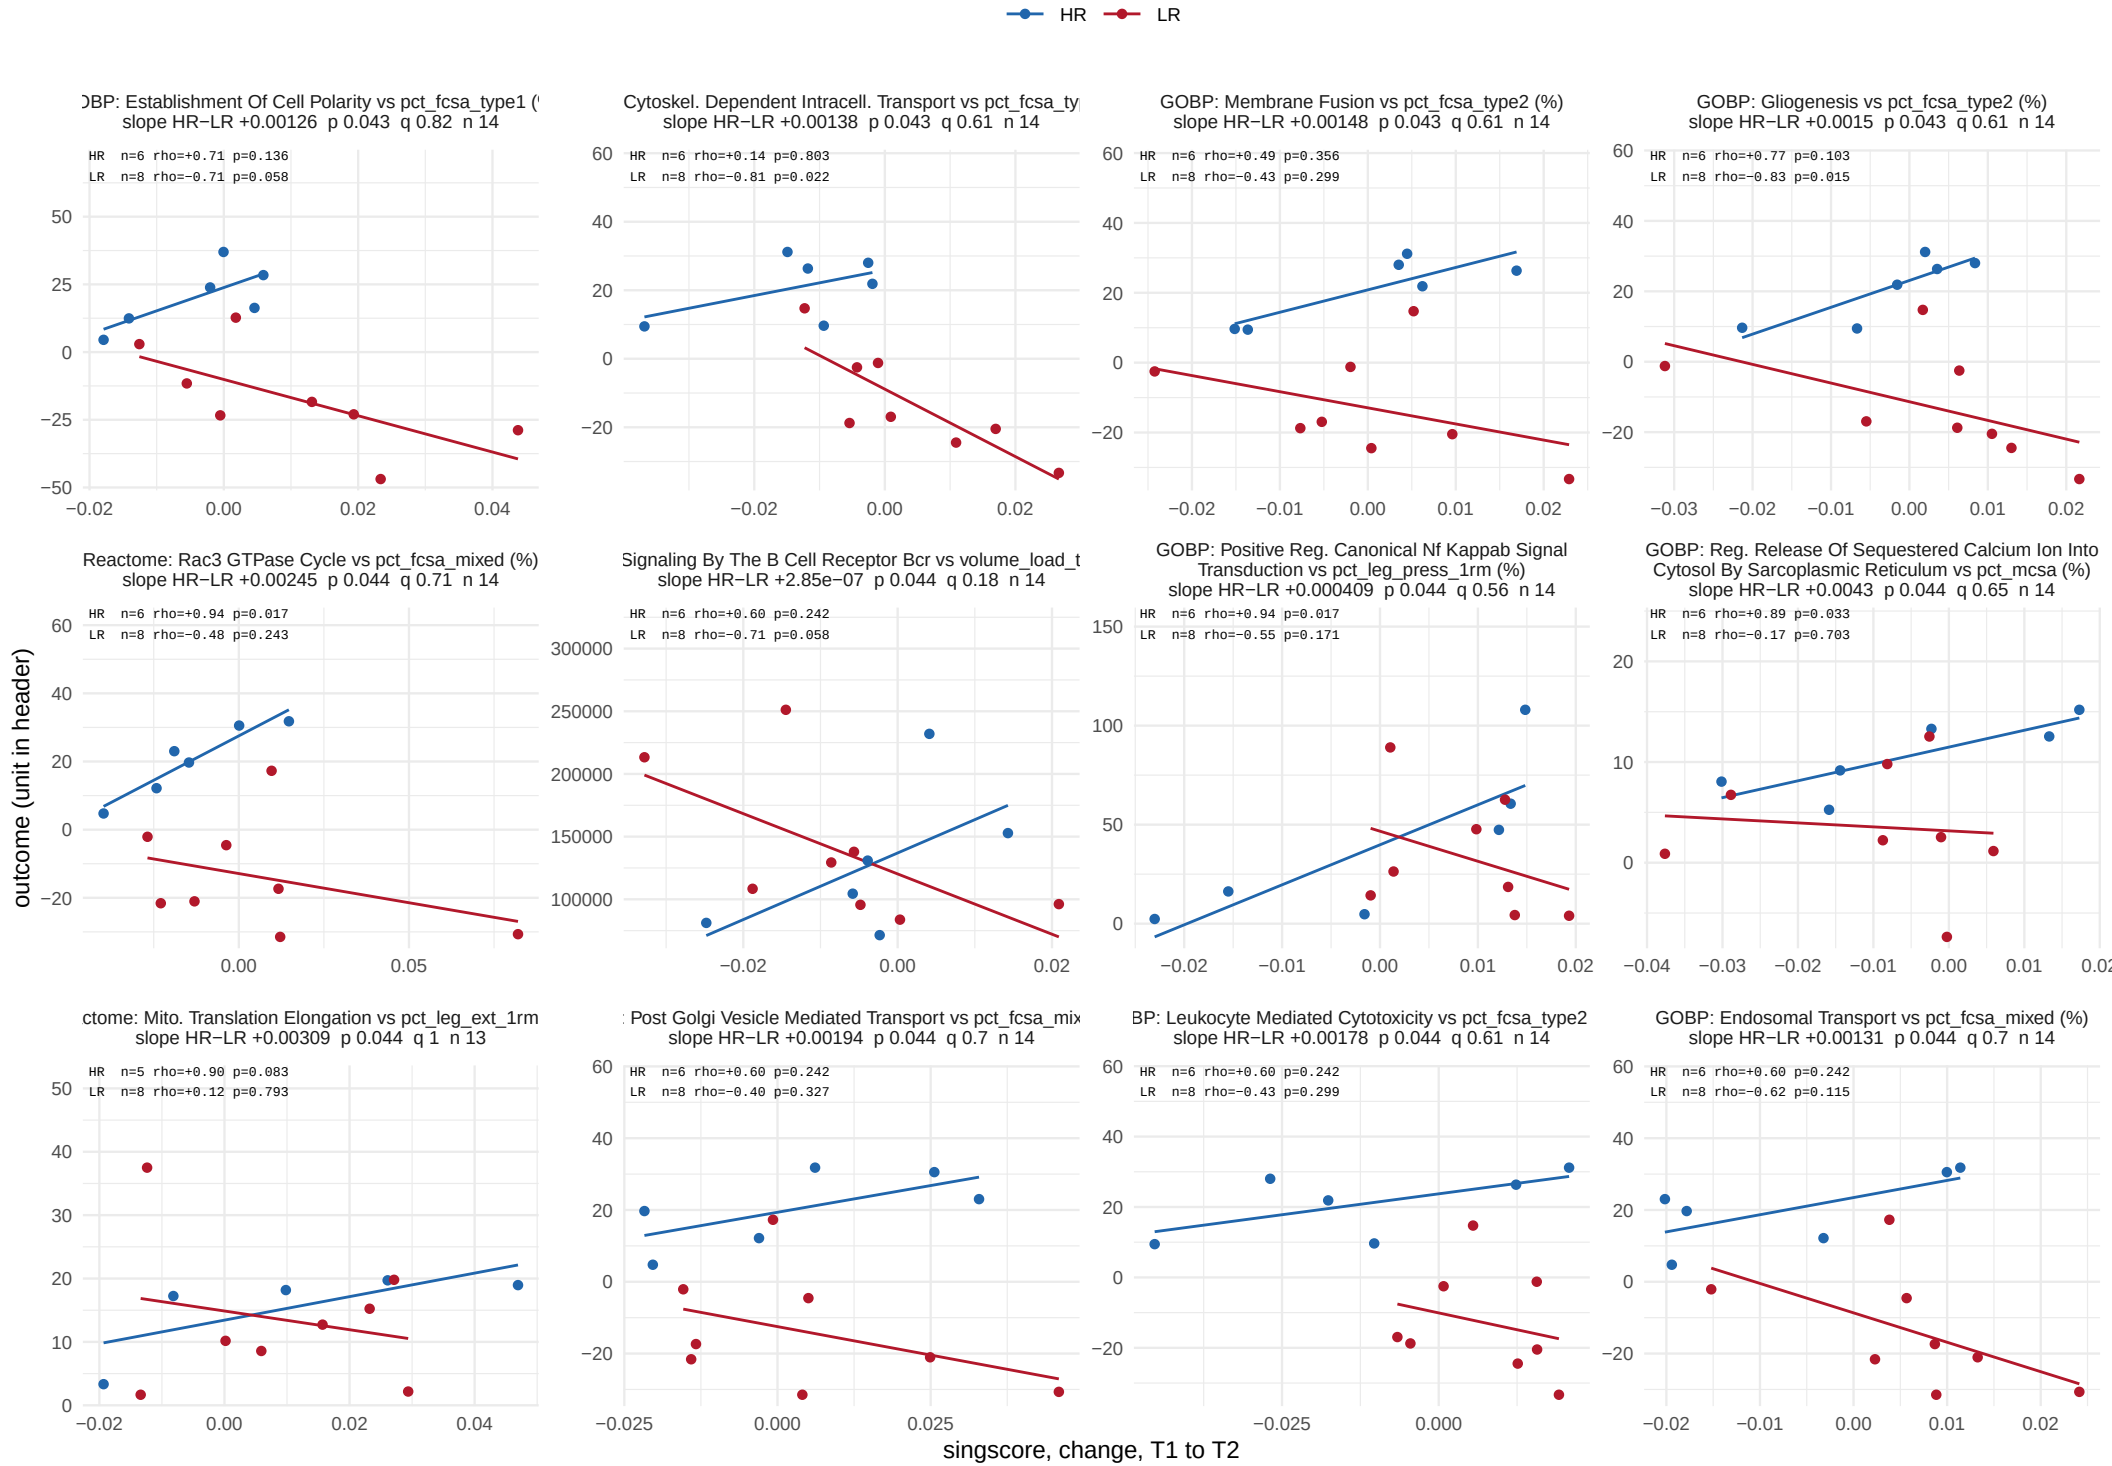

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, training window


604 of 9646 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 47 of 51.

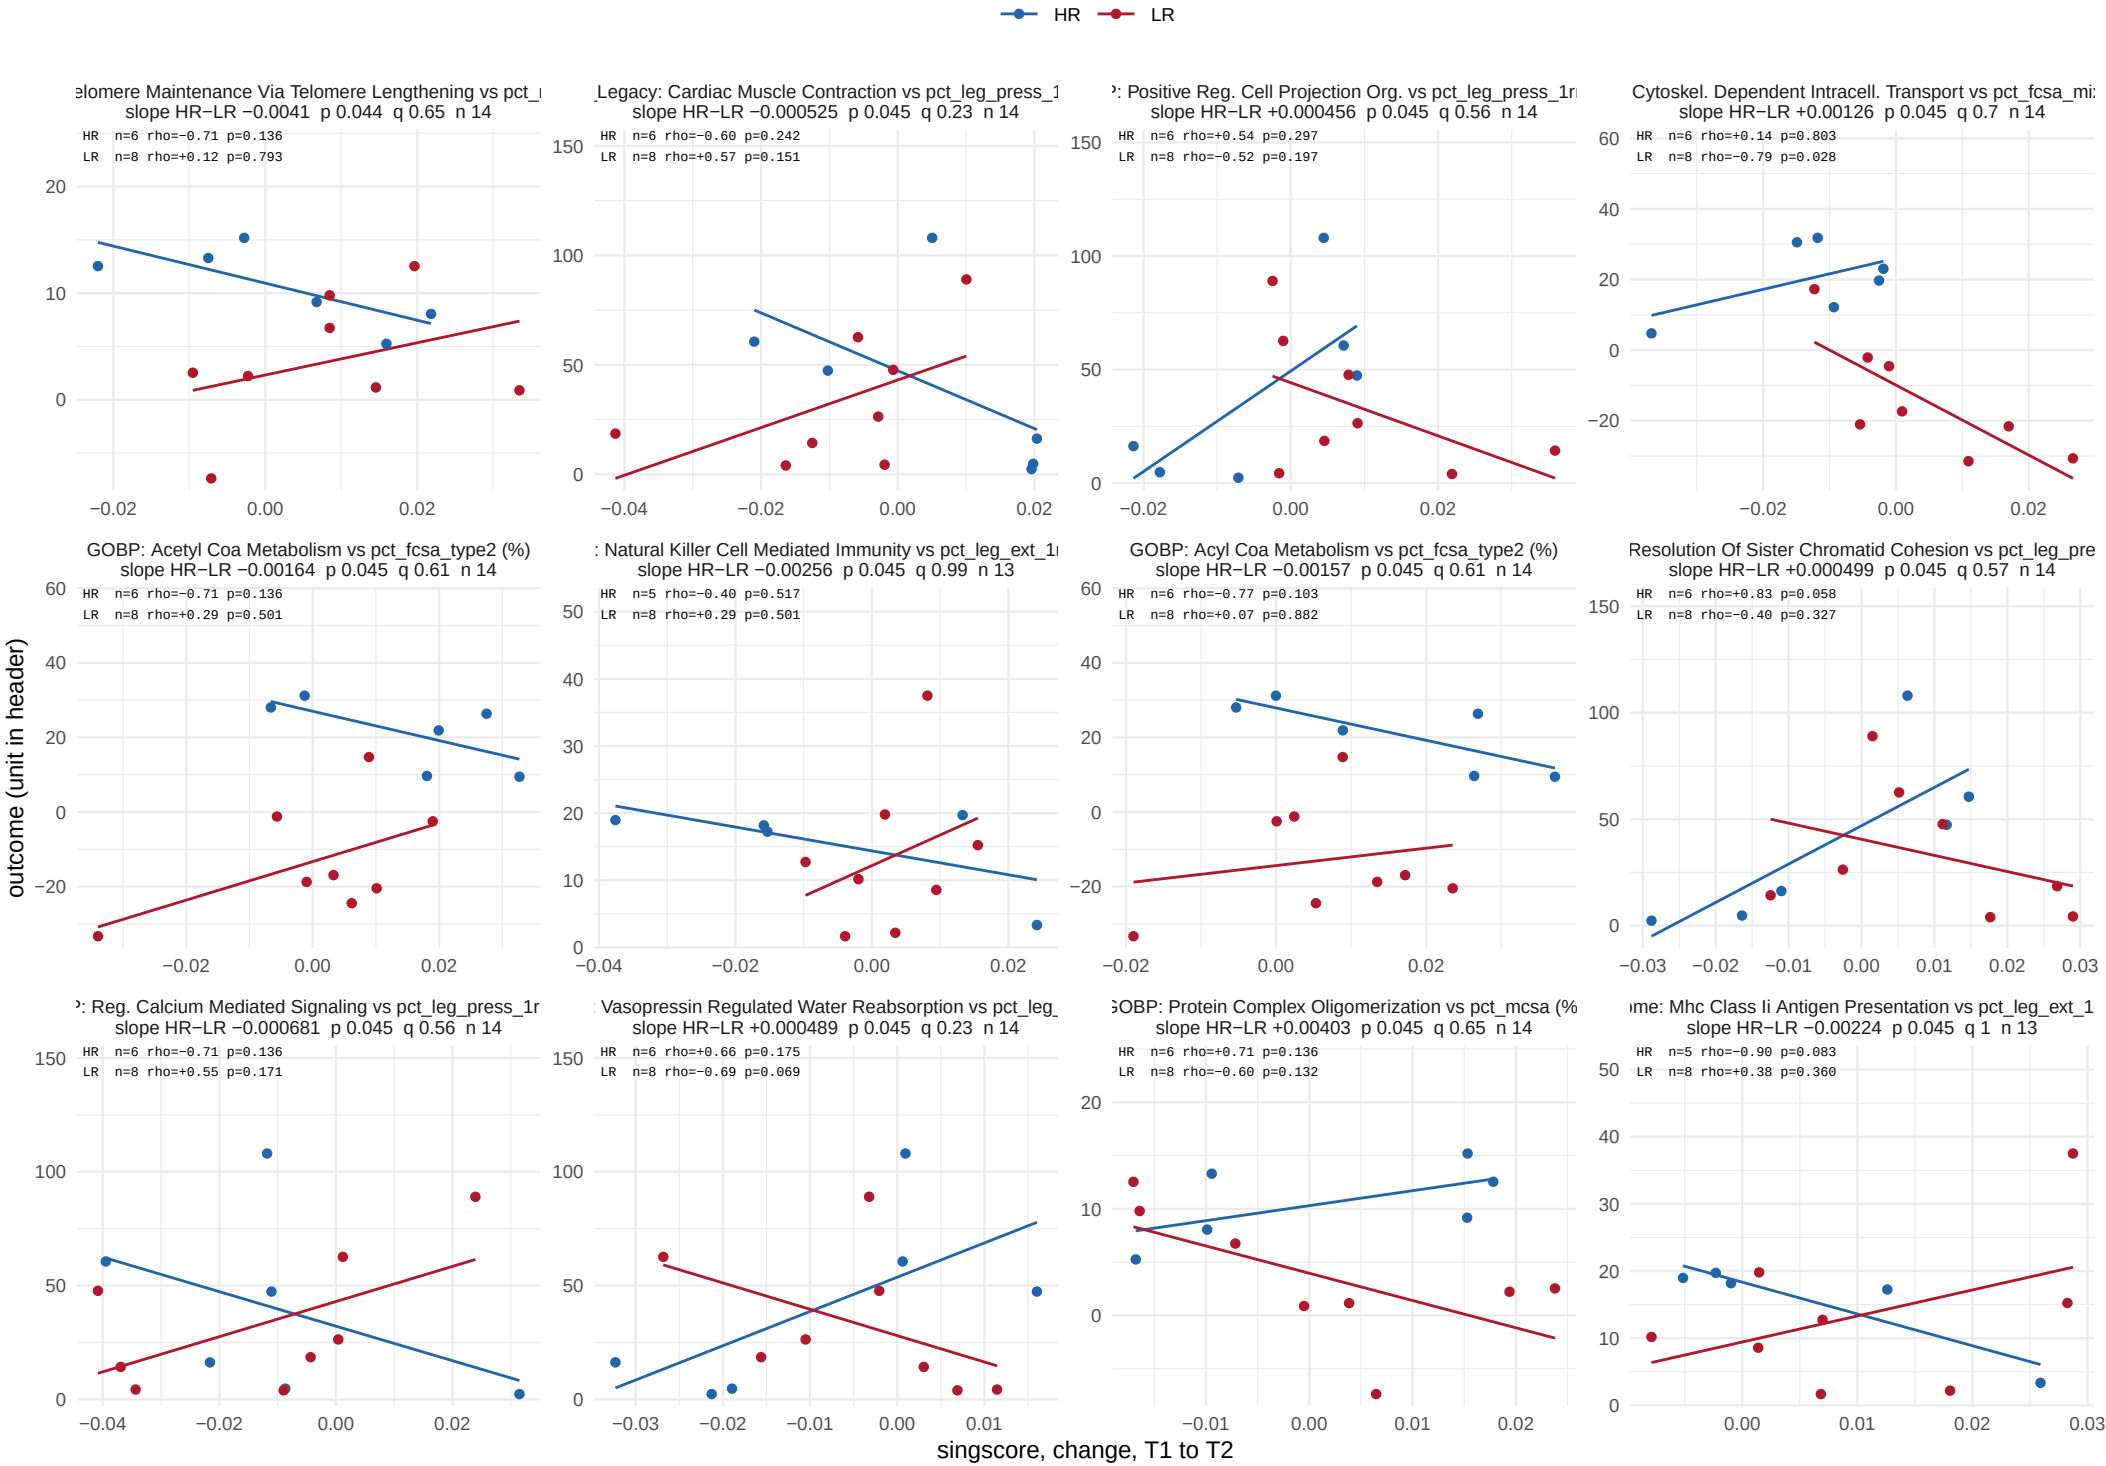

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, training window


604 of 9646 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 48 of 51.

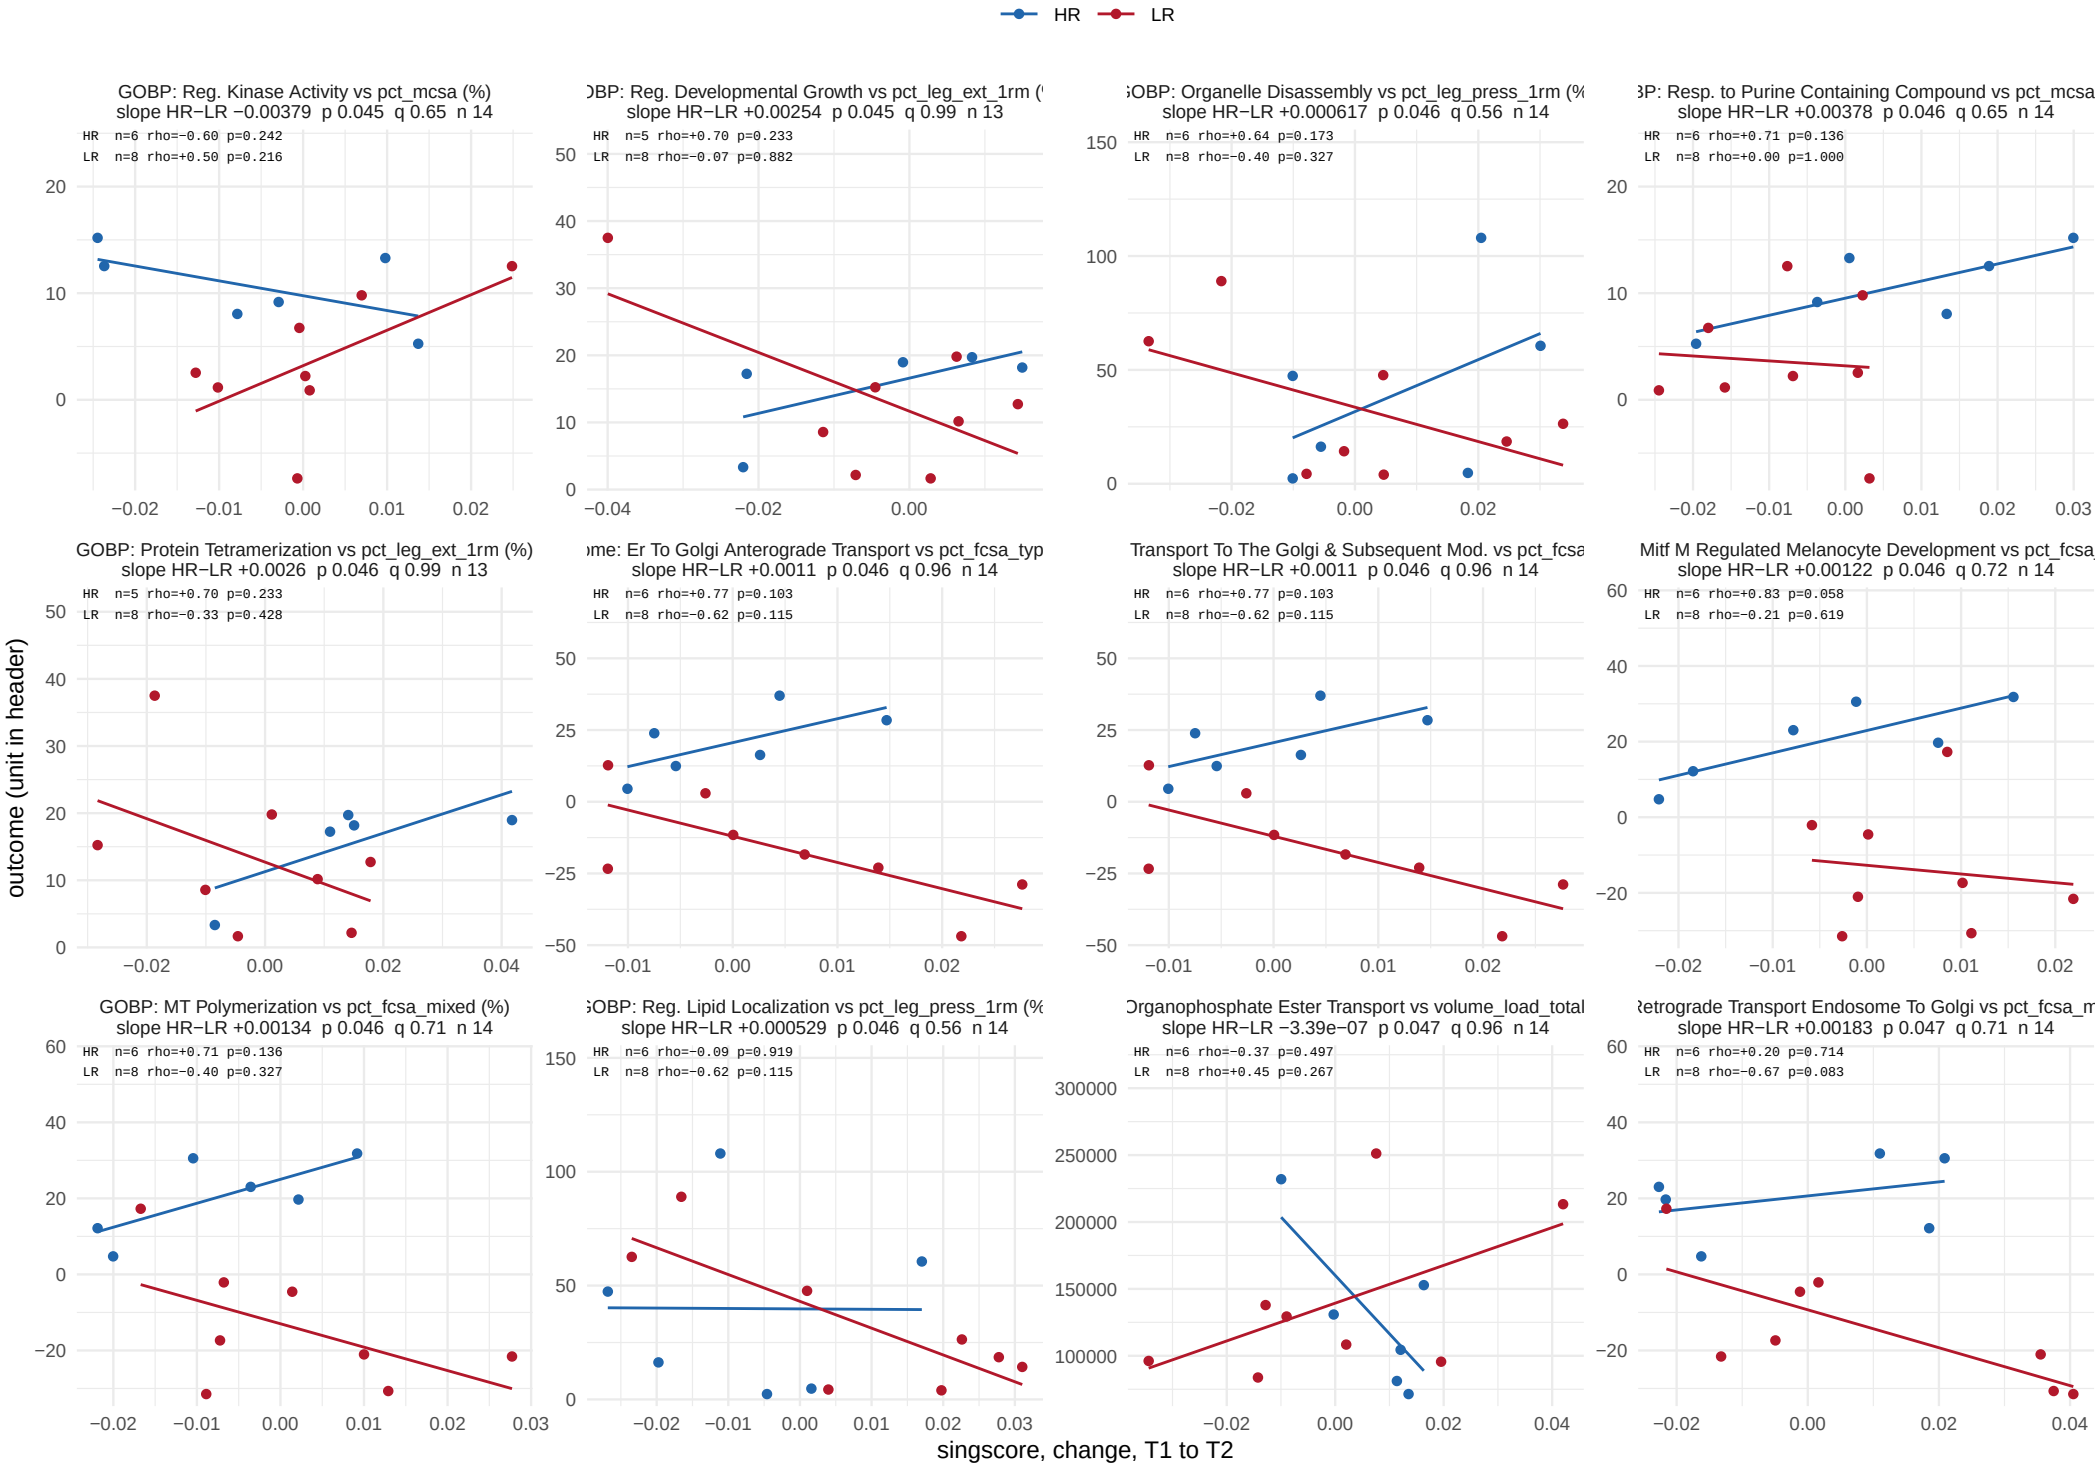

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, training window


604 of 9646 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 49 of 51.

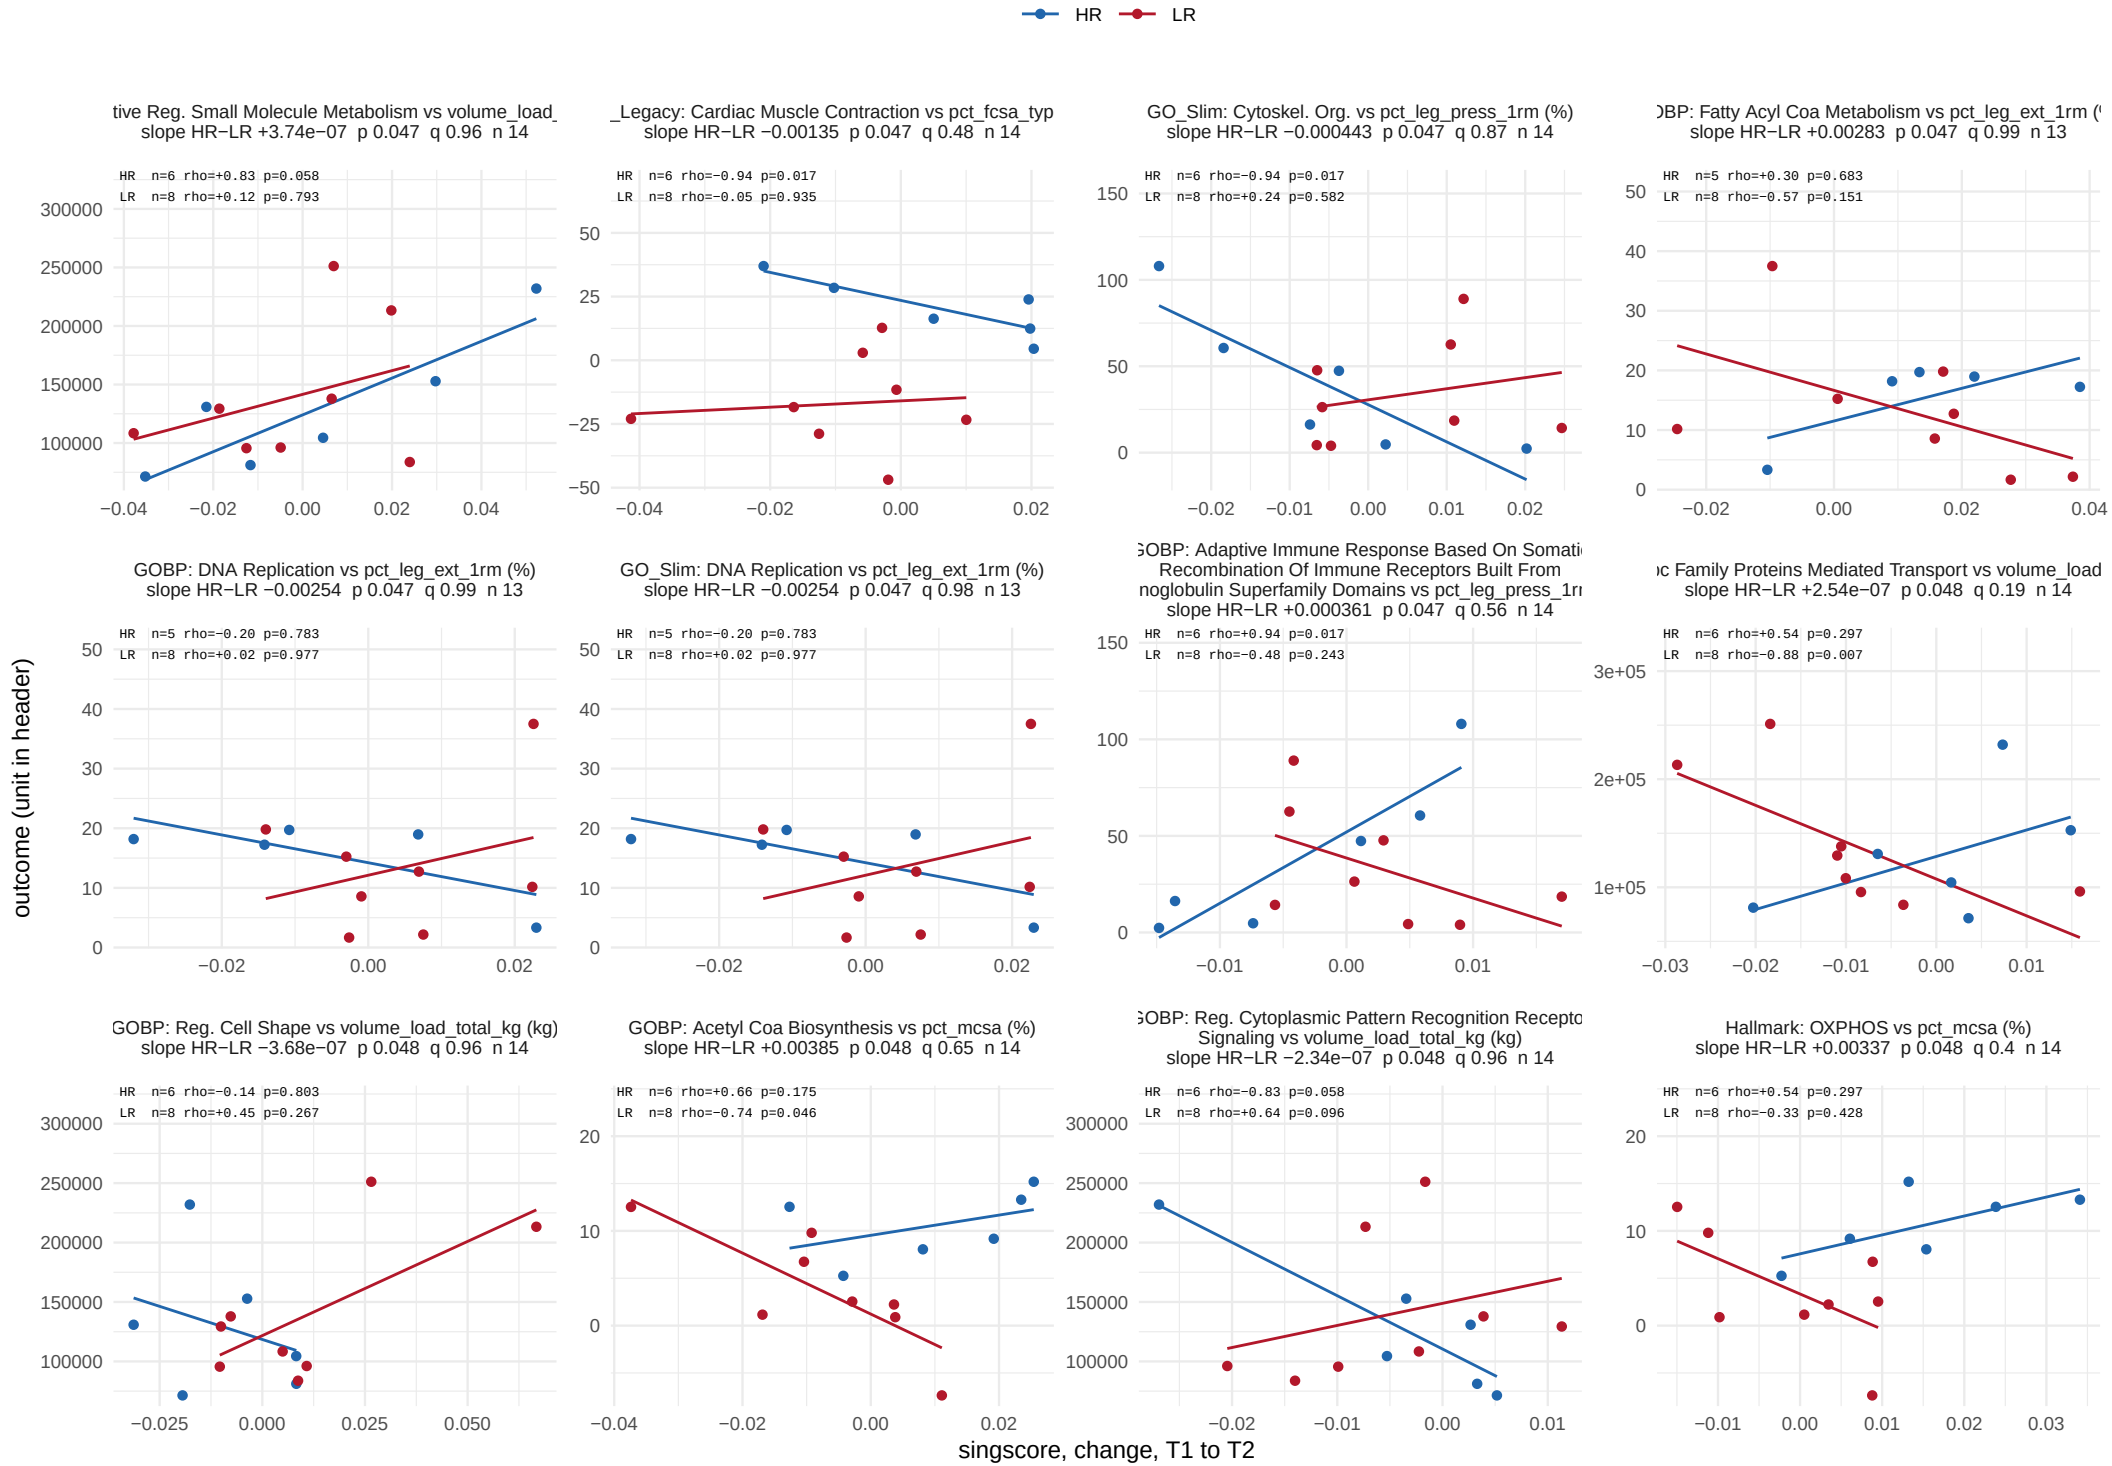

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, training window


604 of 9646 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 50 of 51.

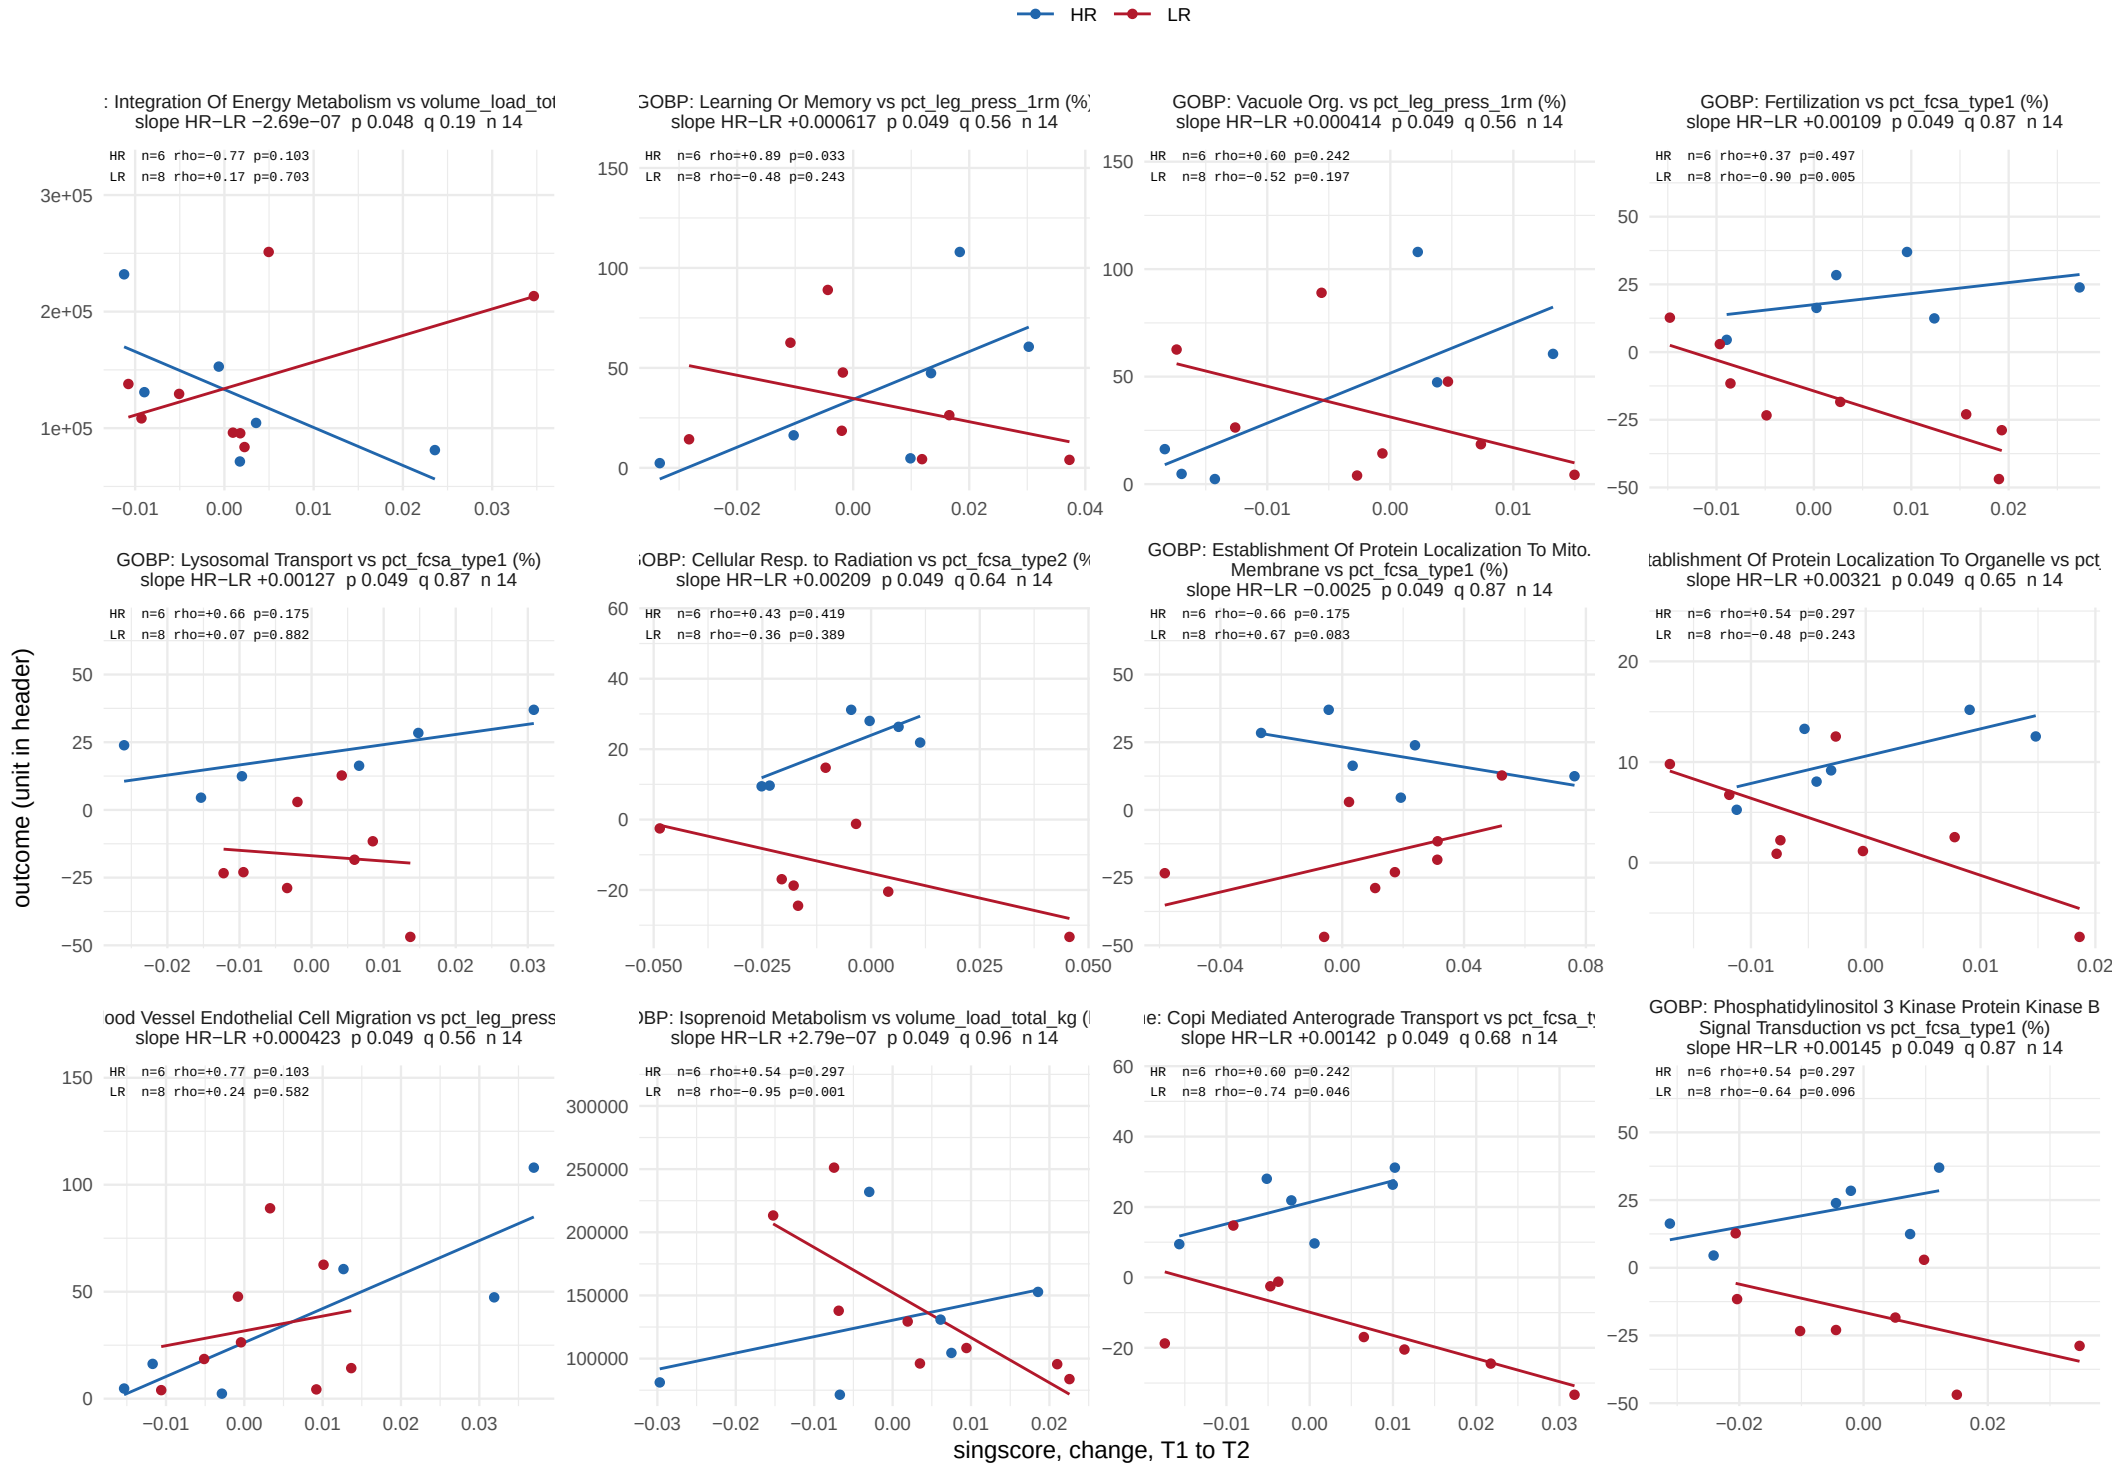

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, training window


604 of 9646 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 51 of 51.

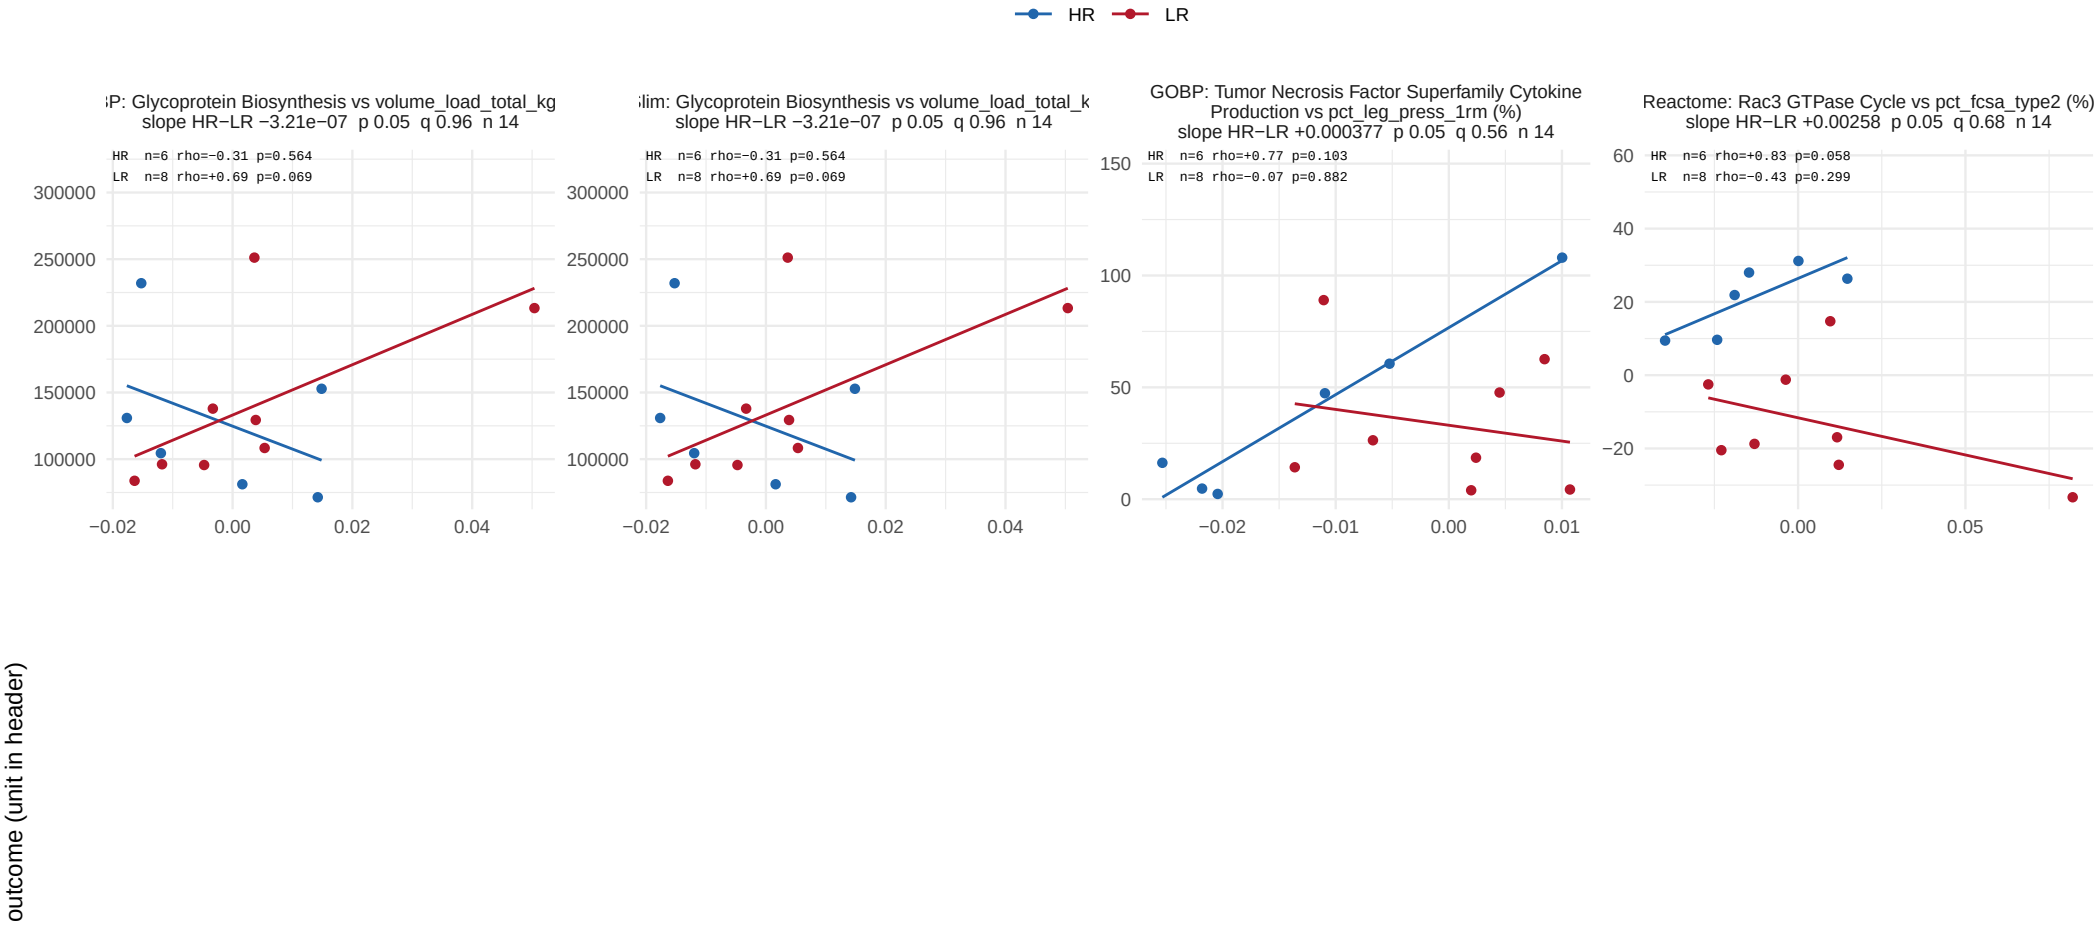

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, baseline window


232 of 9646 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 1 of 20.

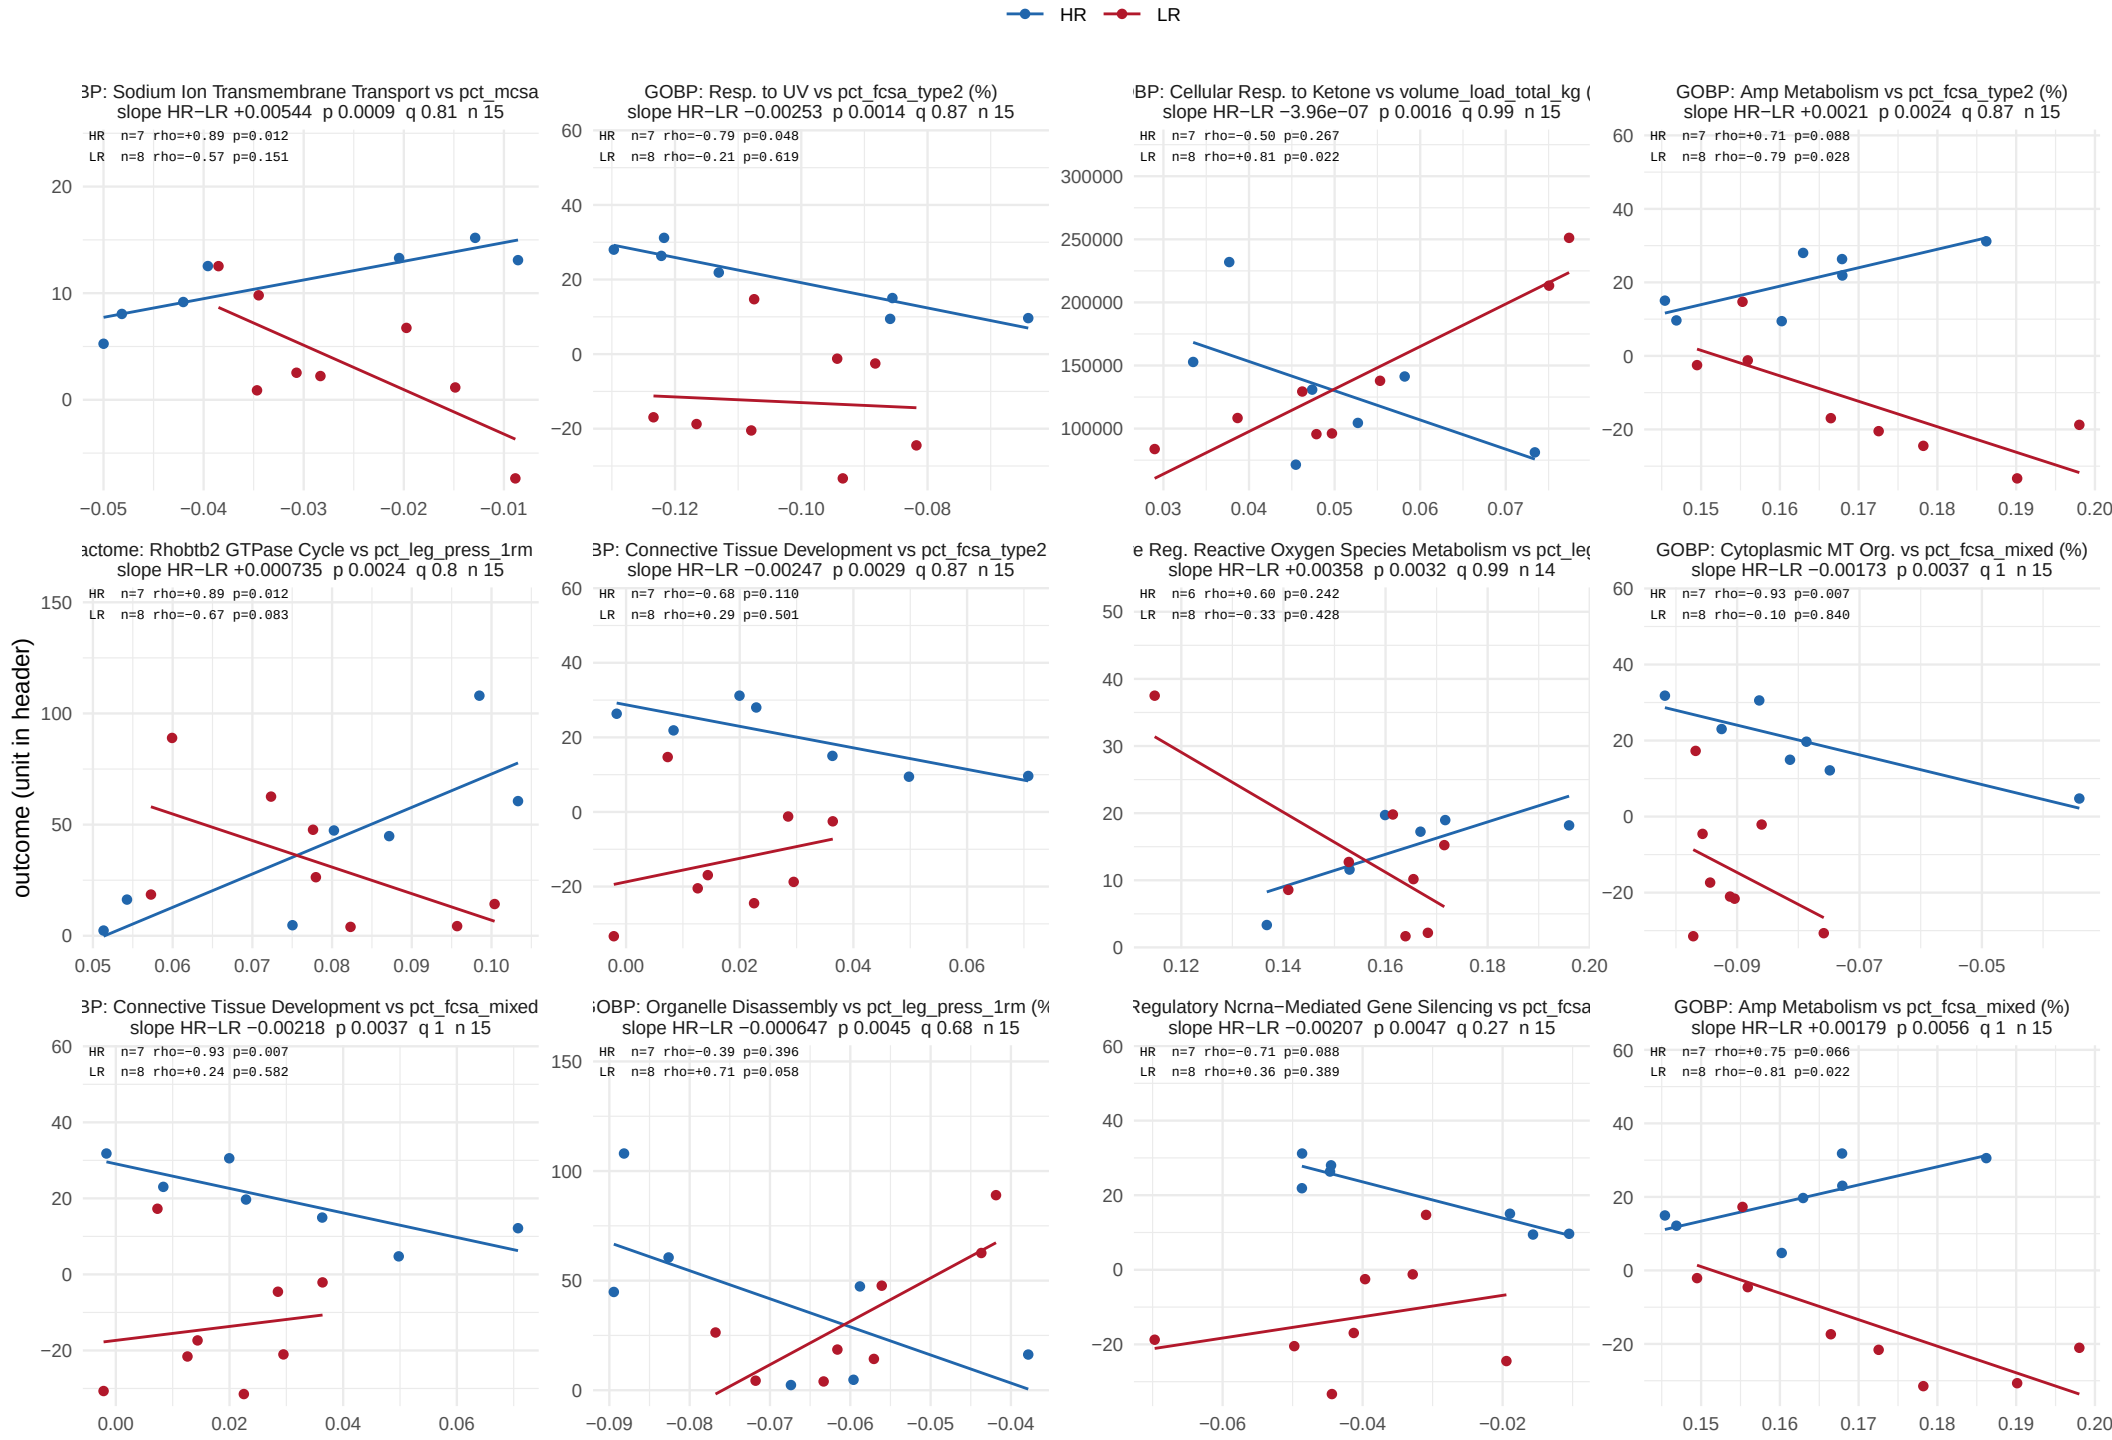

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, baseline window


232 of 9646 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 2 of 20.

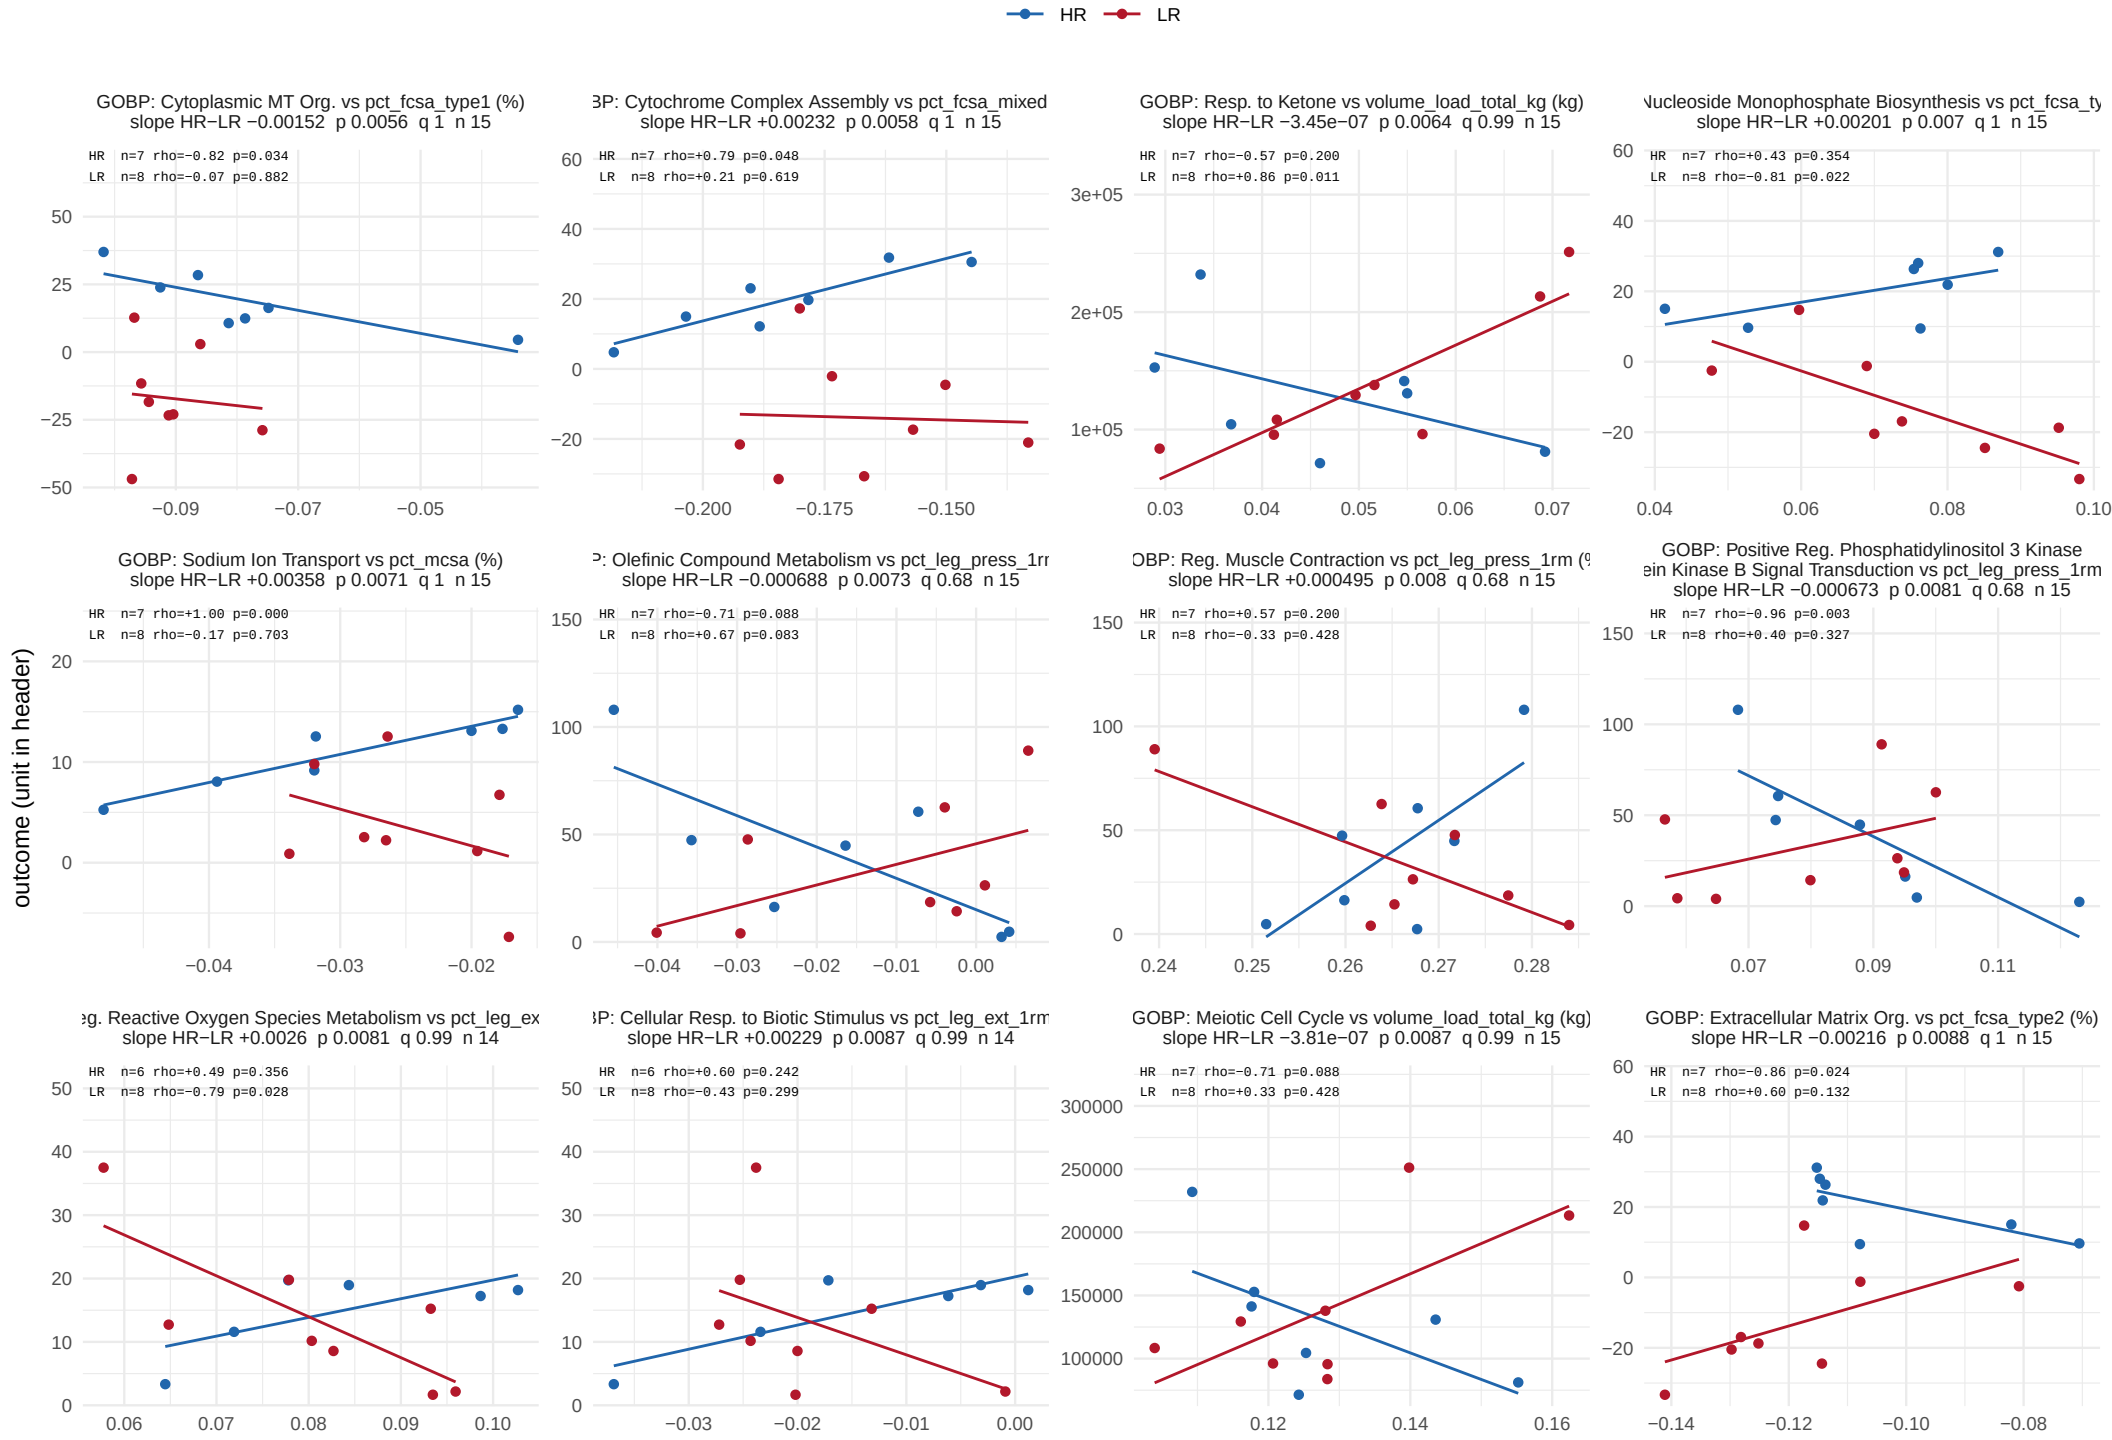

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, baseline window


232 of 9646 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 3 of 20.

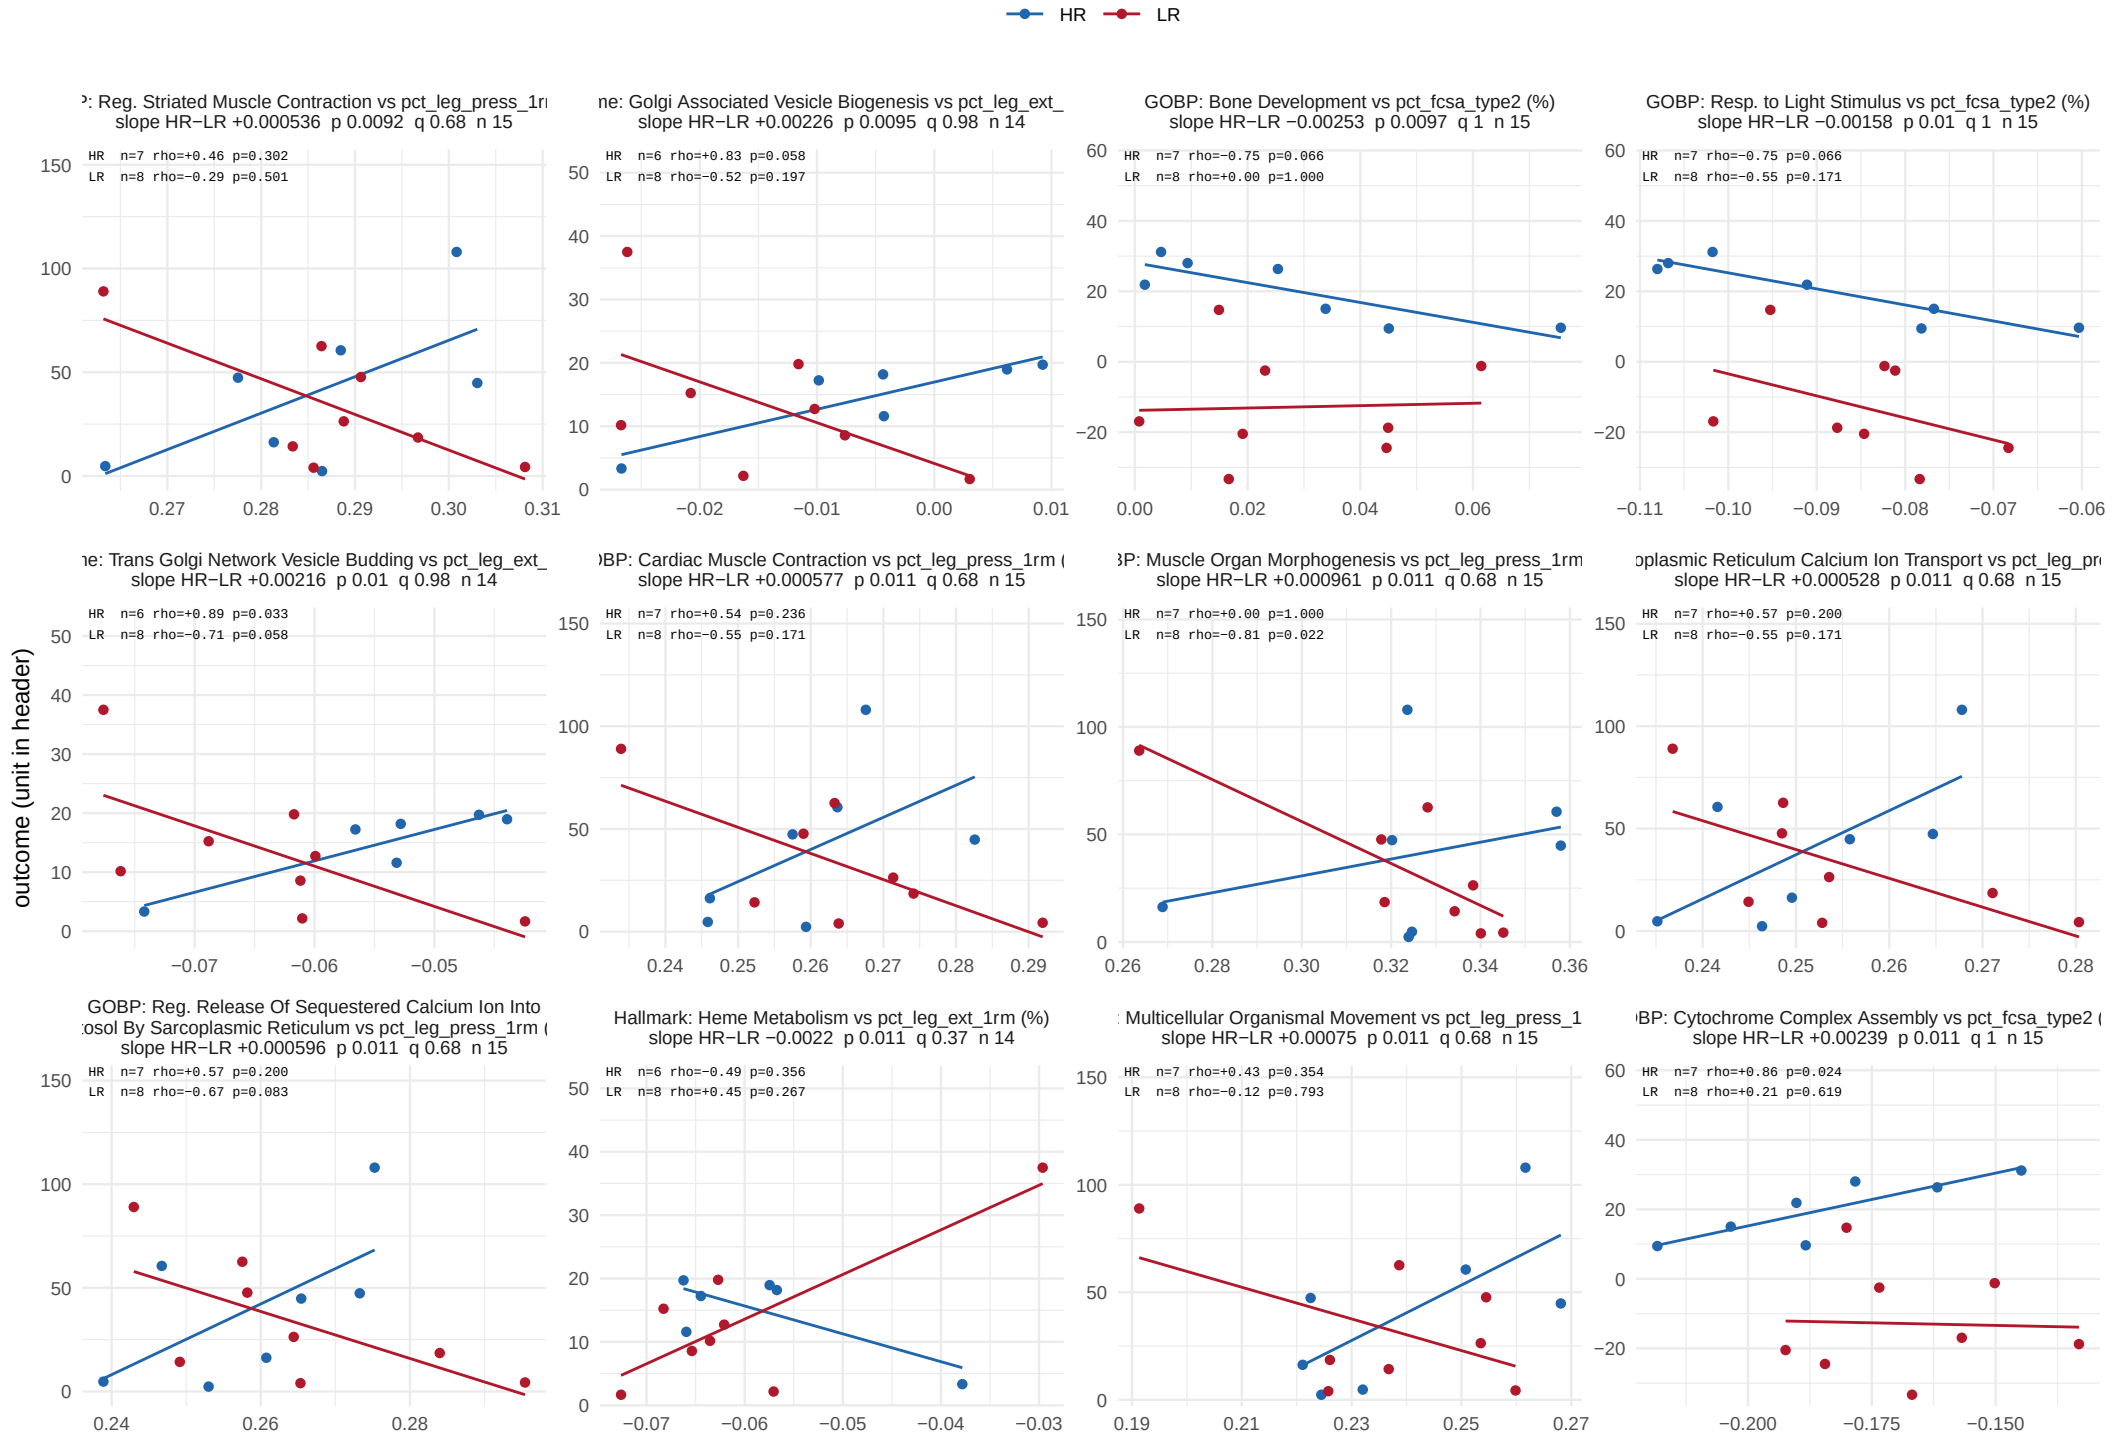

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, baseline window


232 of 9646 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 4 of 20.

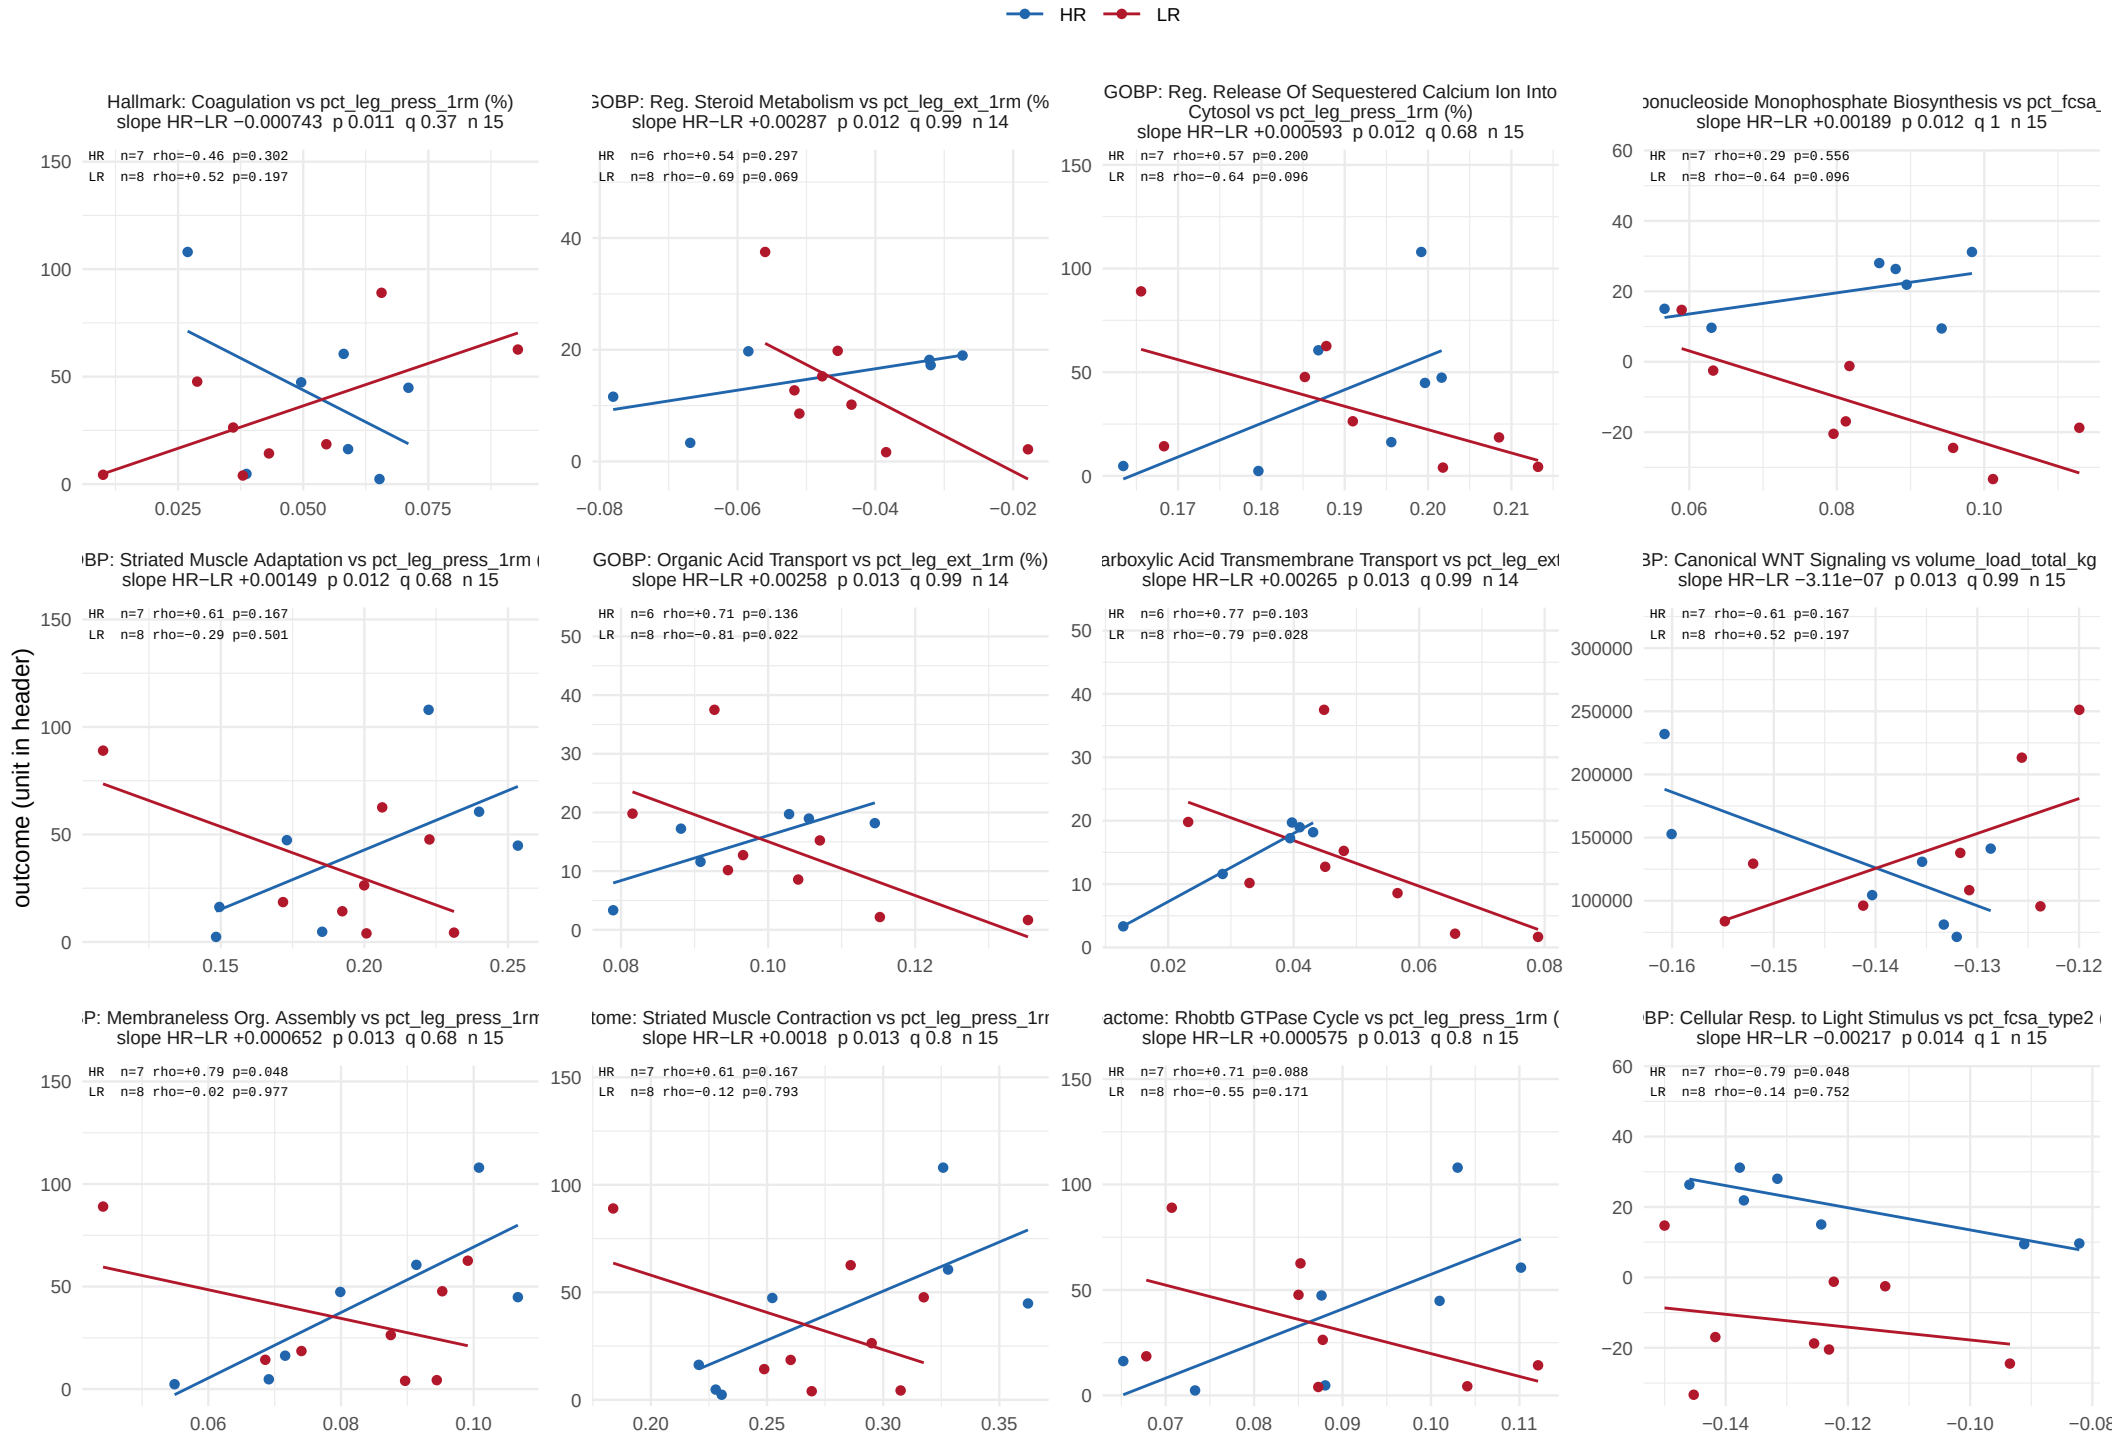

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, baseline window


232 of 9646 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 5 of 20.

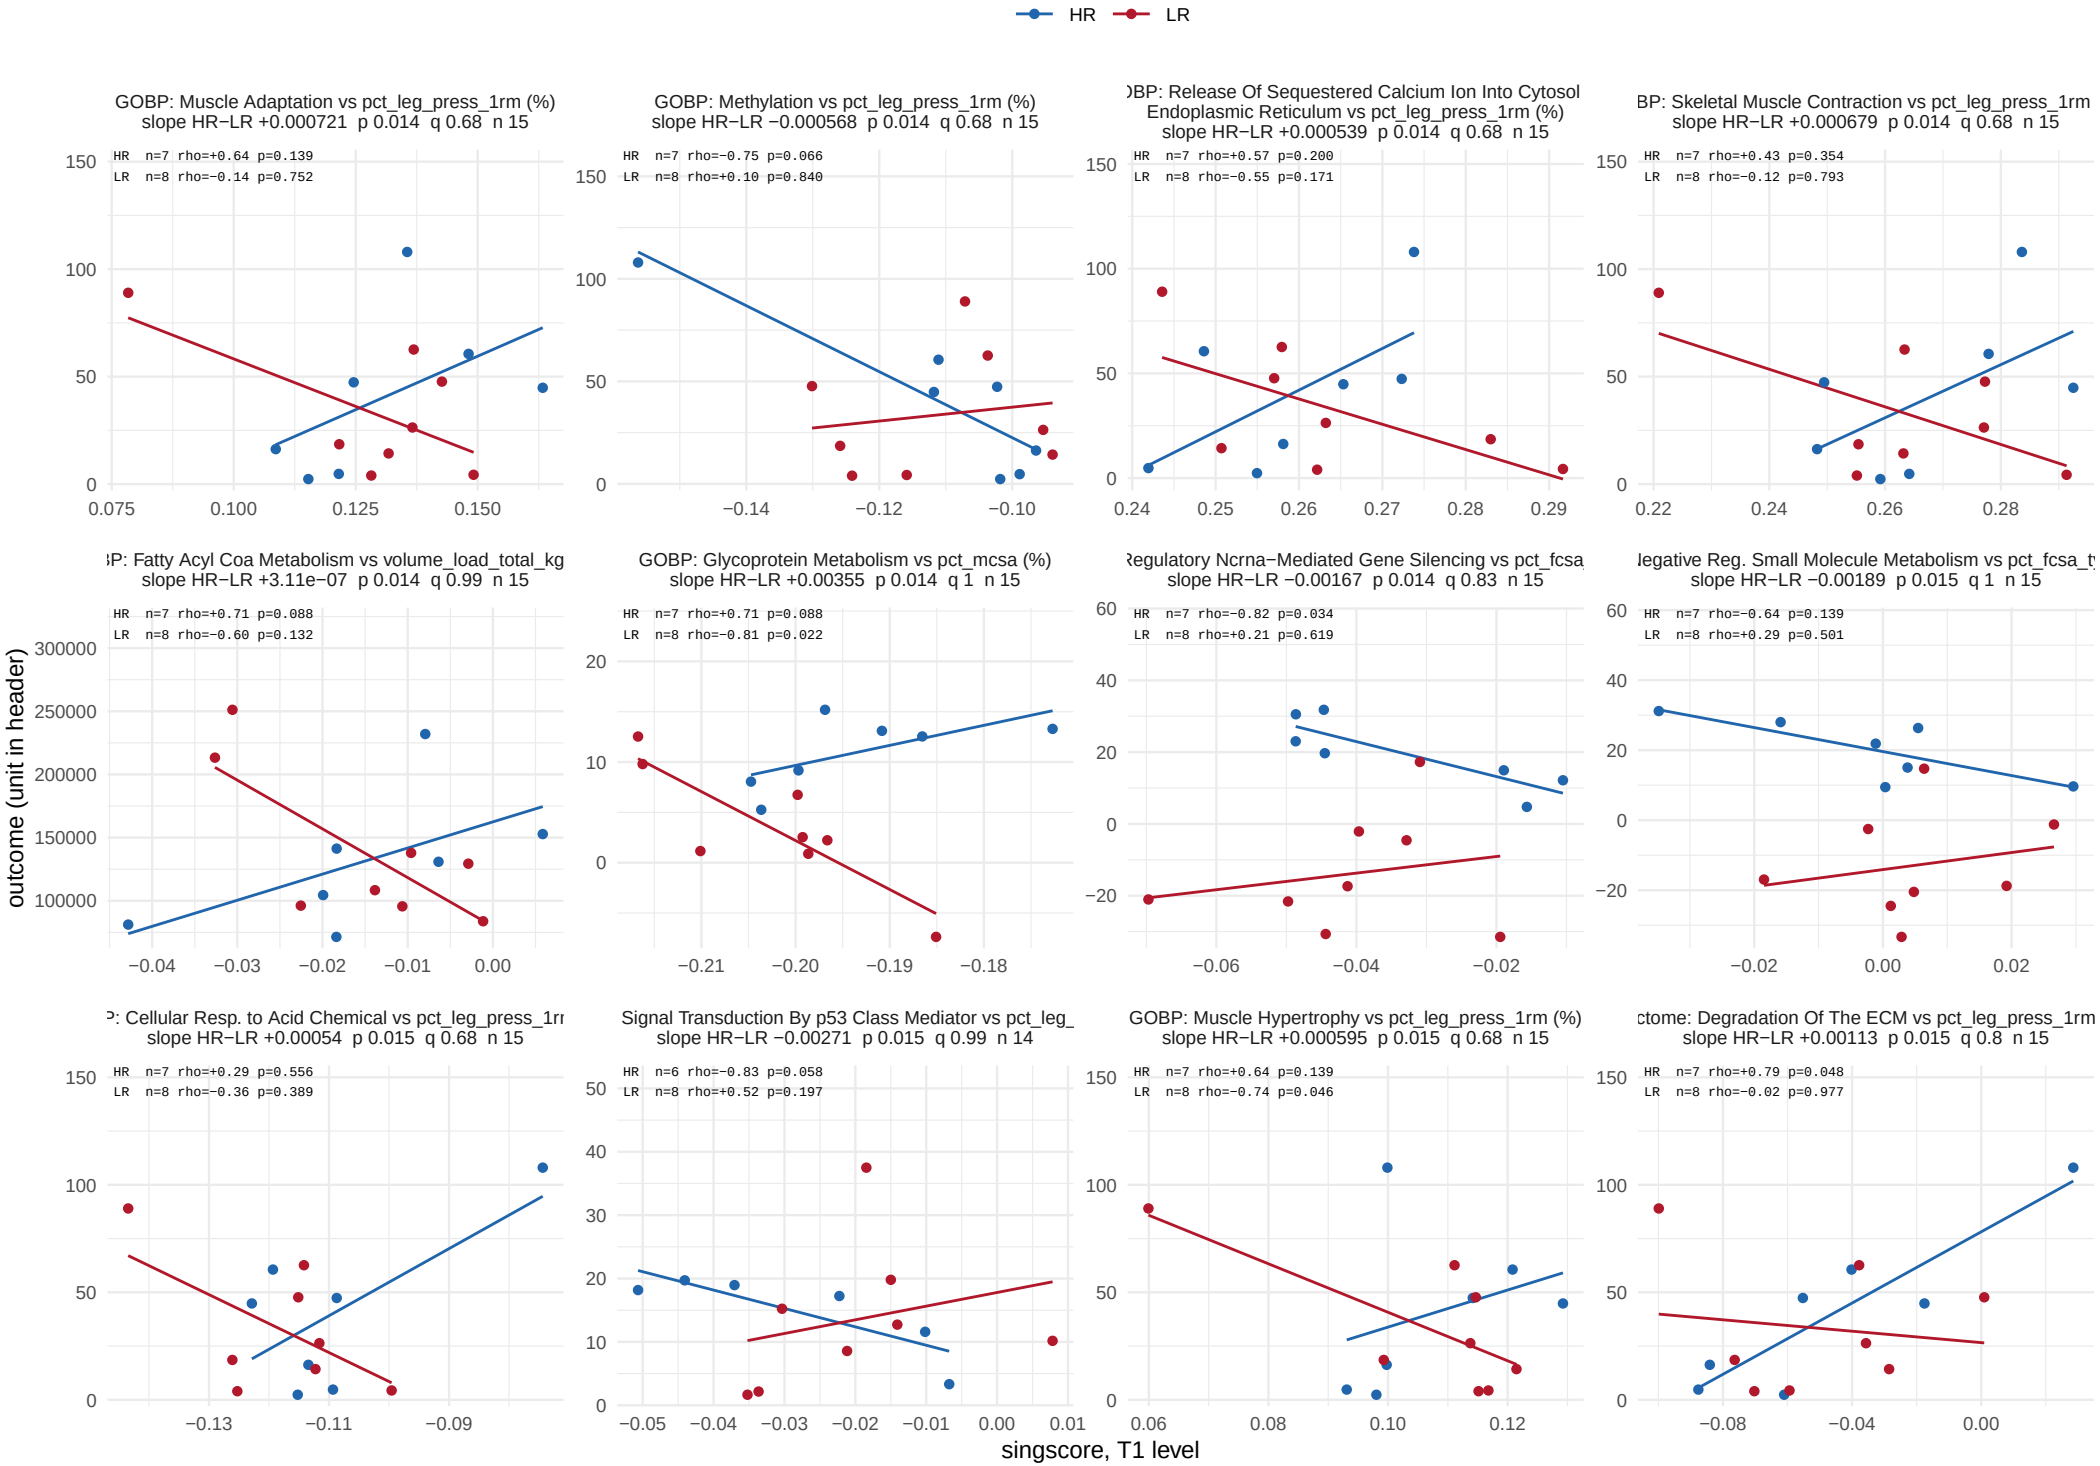

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, baseline window


232 of 9646 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 6 of 20.

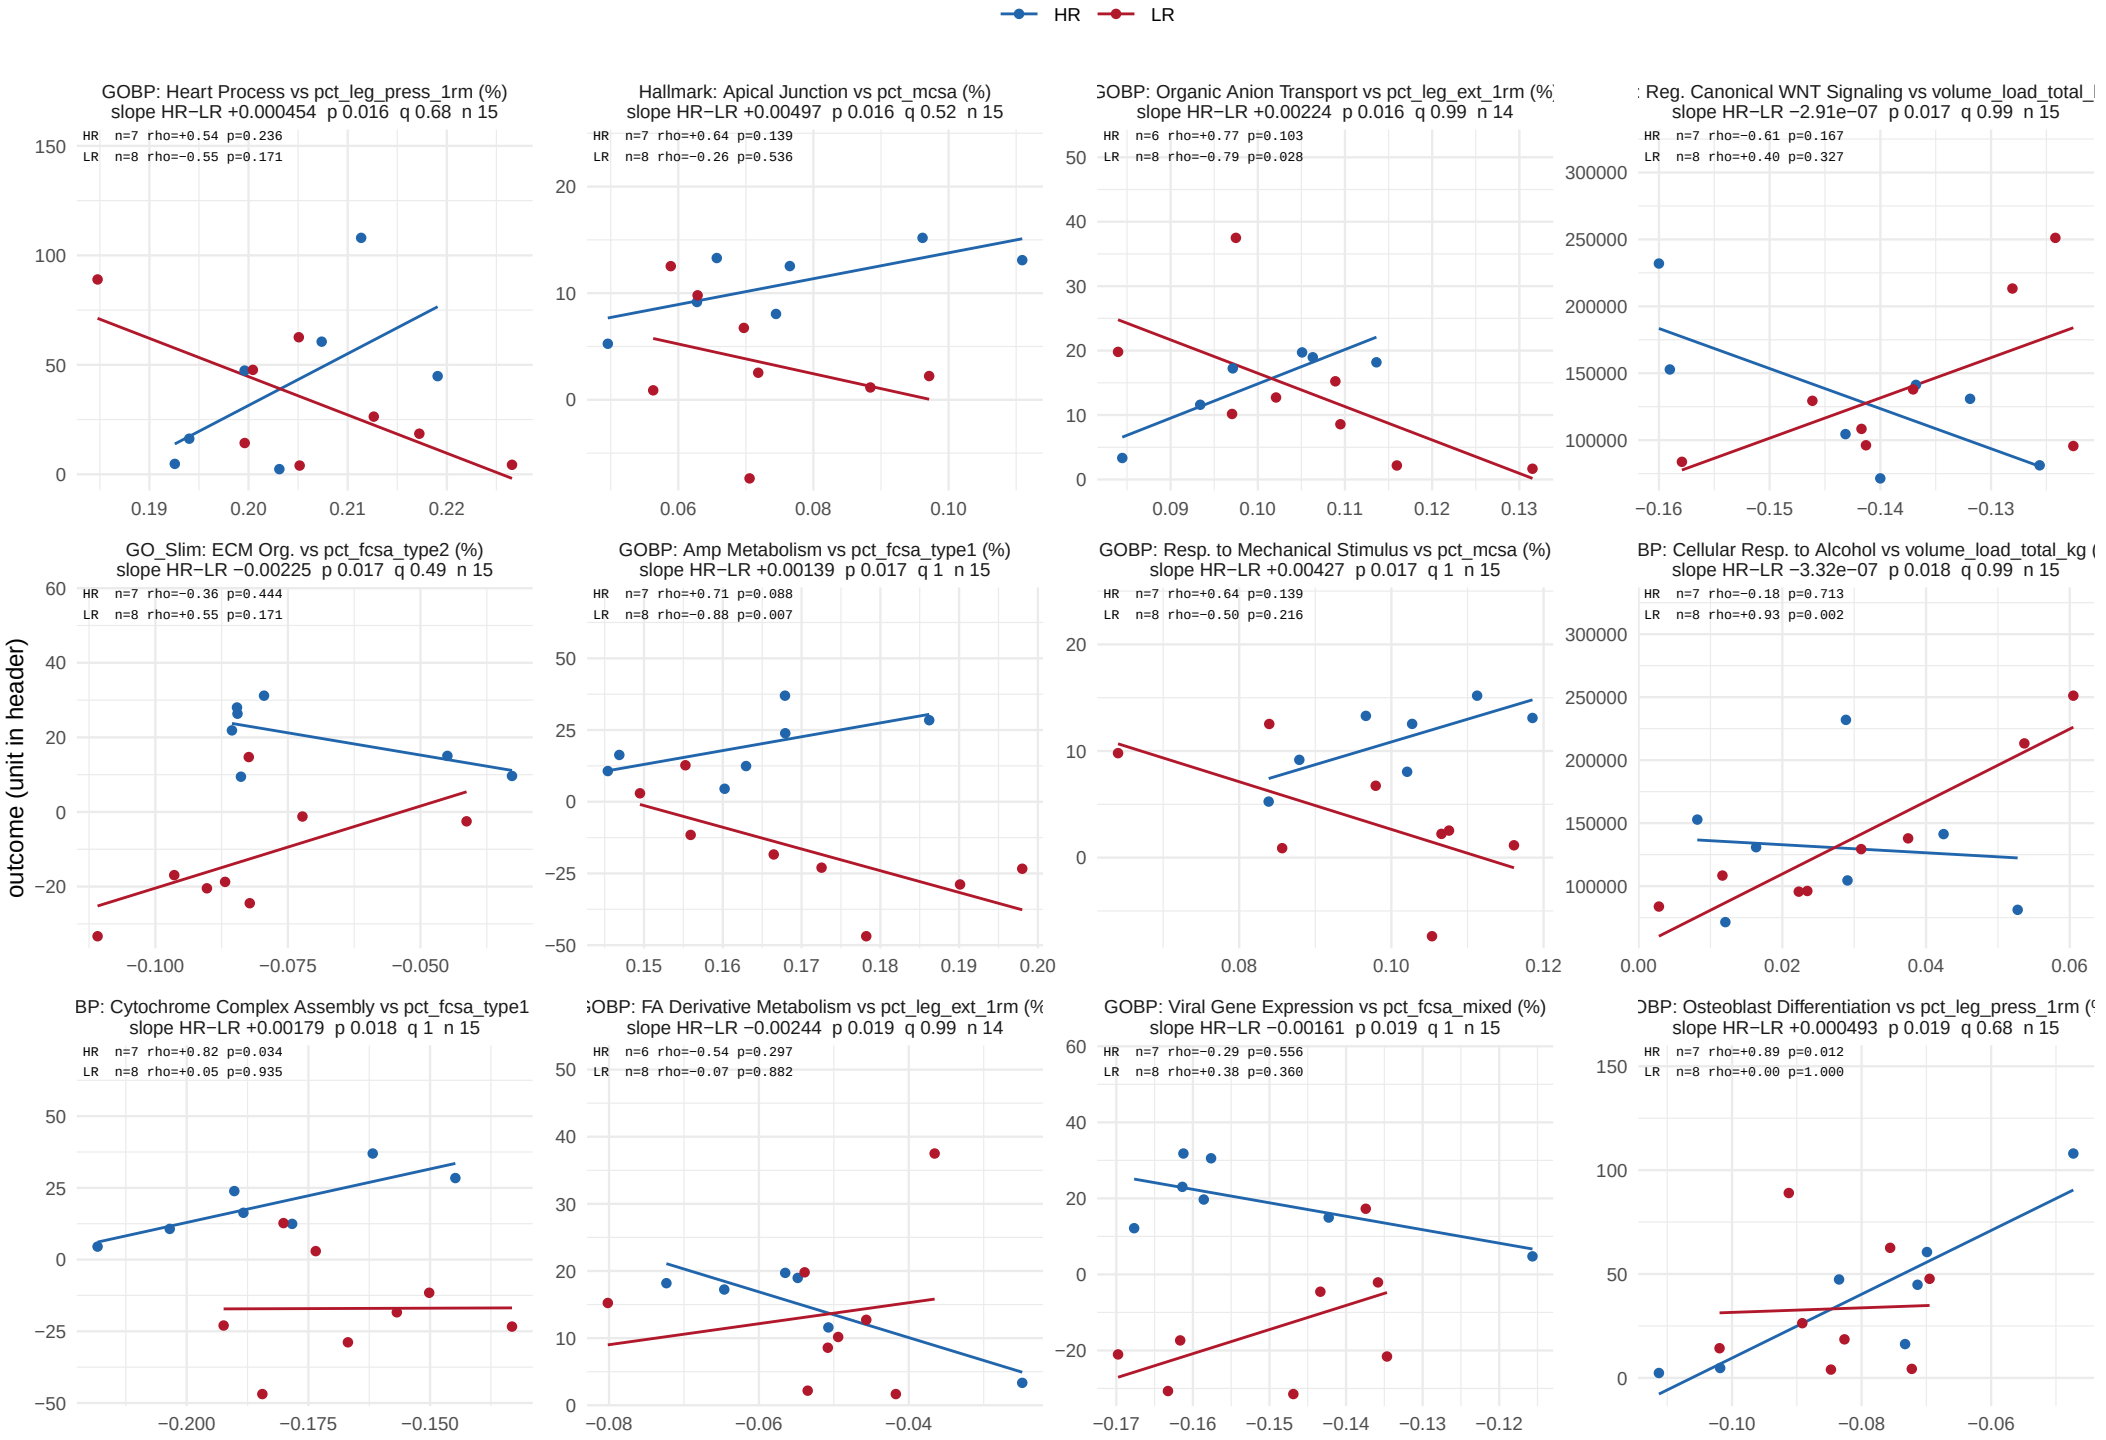

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, baseline window


232 of 9646 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 7 of 20.

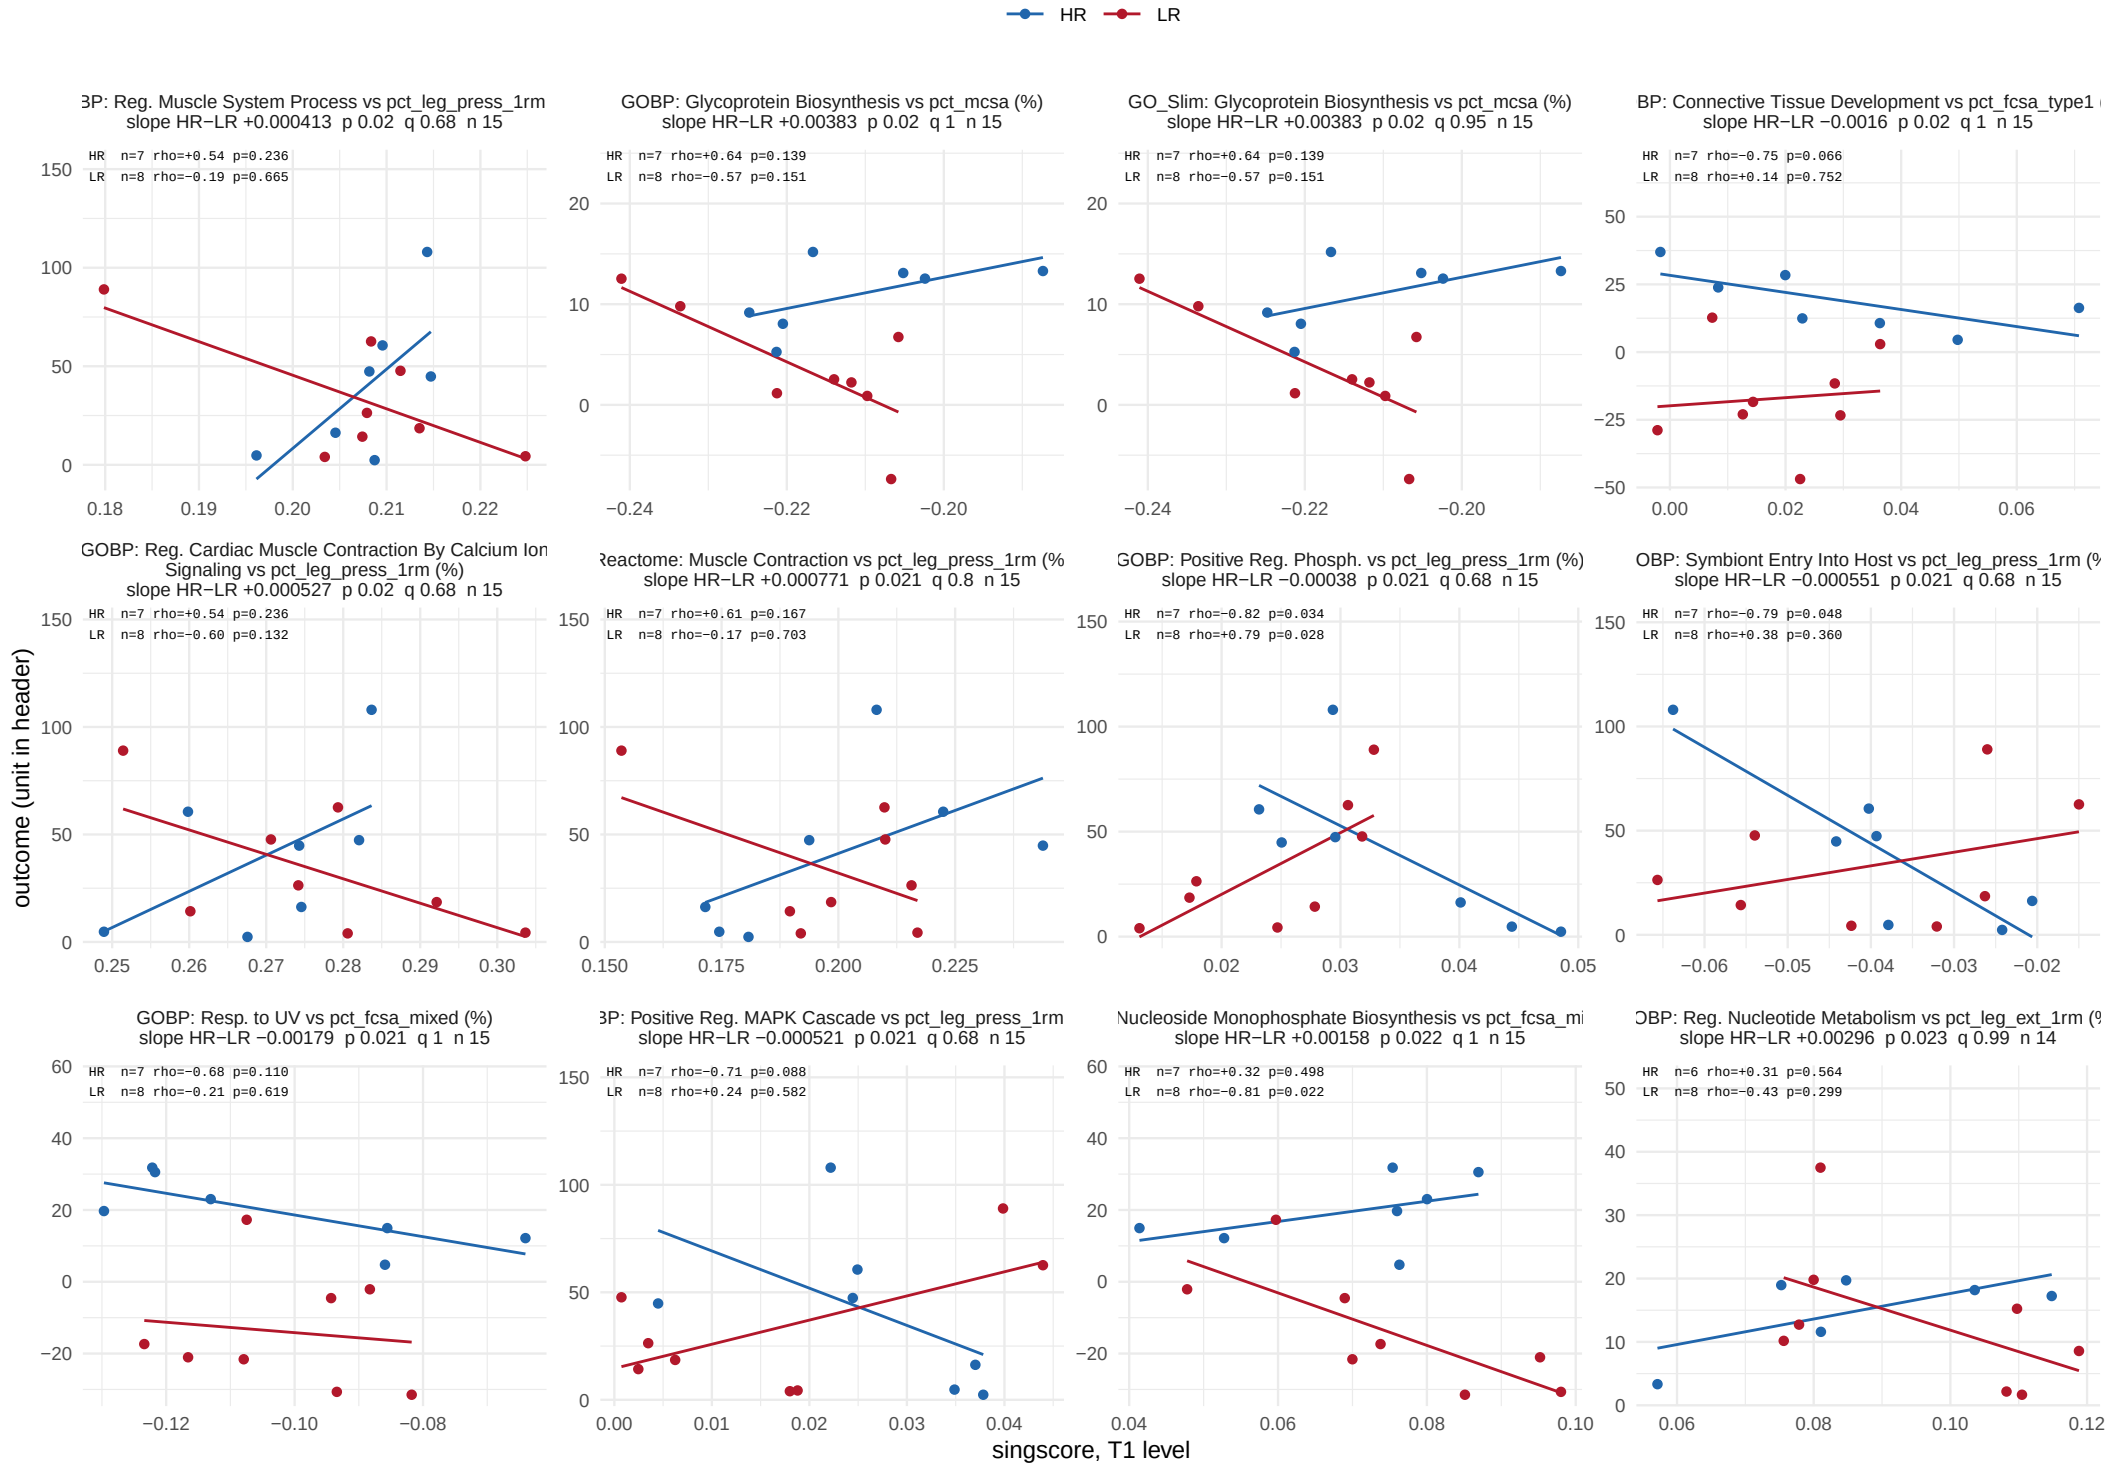

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, baseline window


232 of 9646 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 8 of 20.

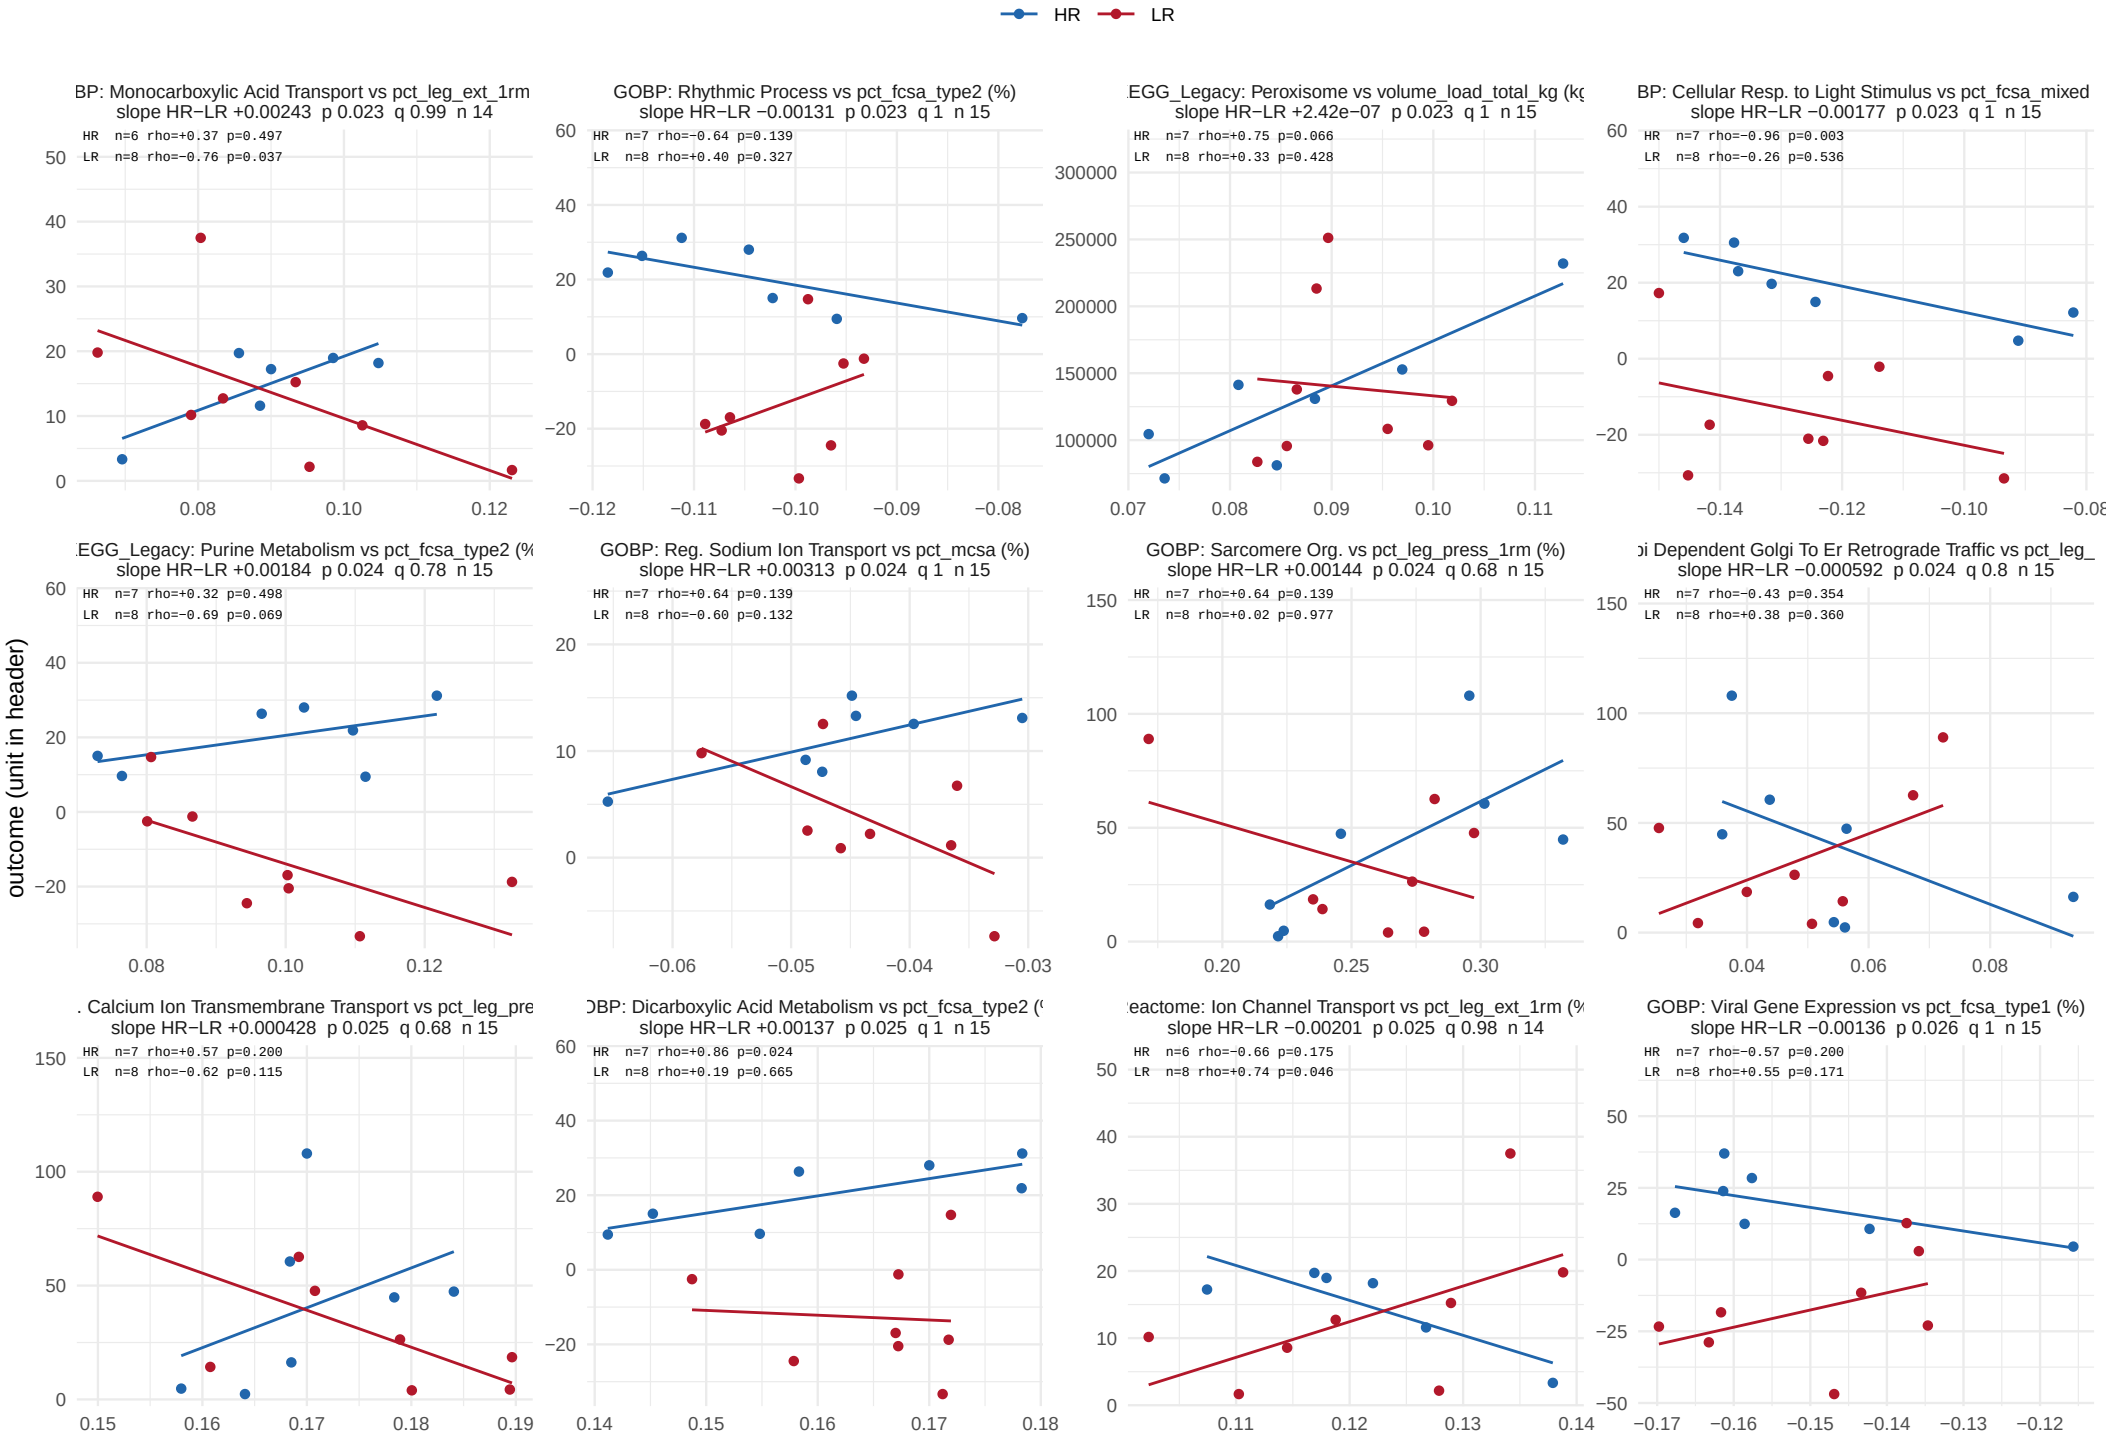

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, baseline window


232 of 9646 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 9 of 20.

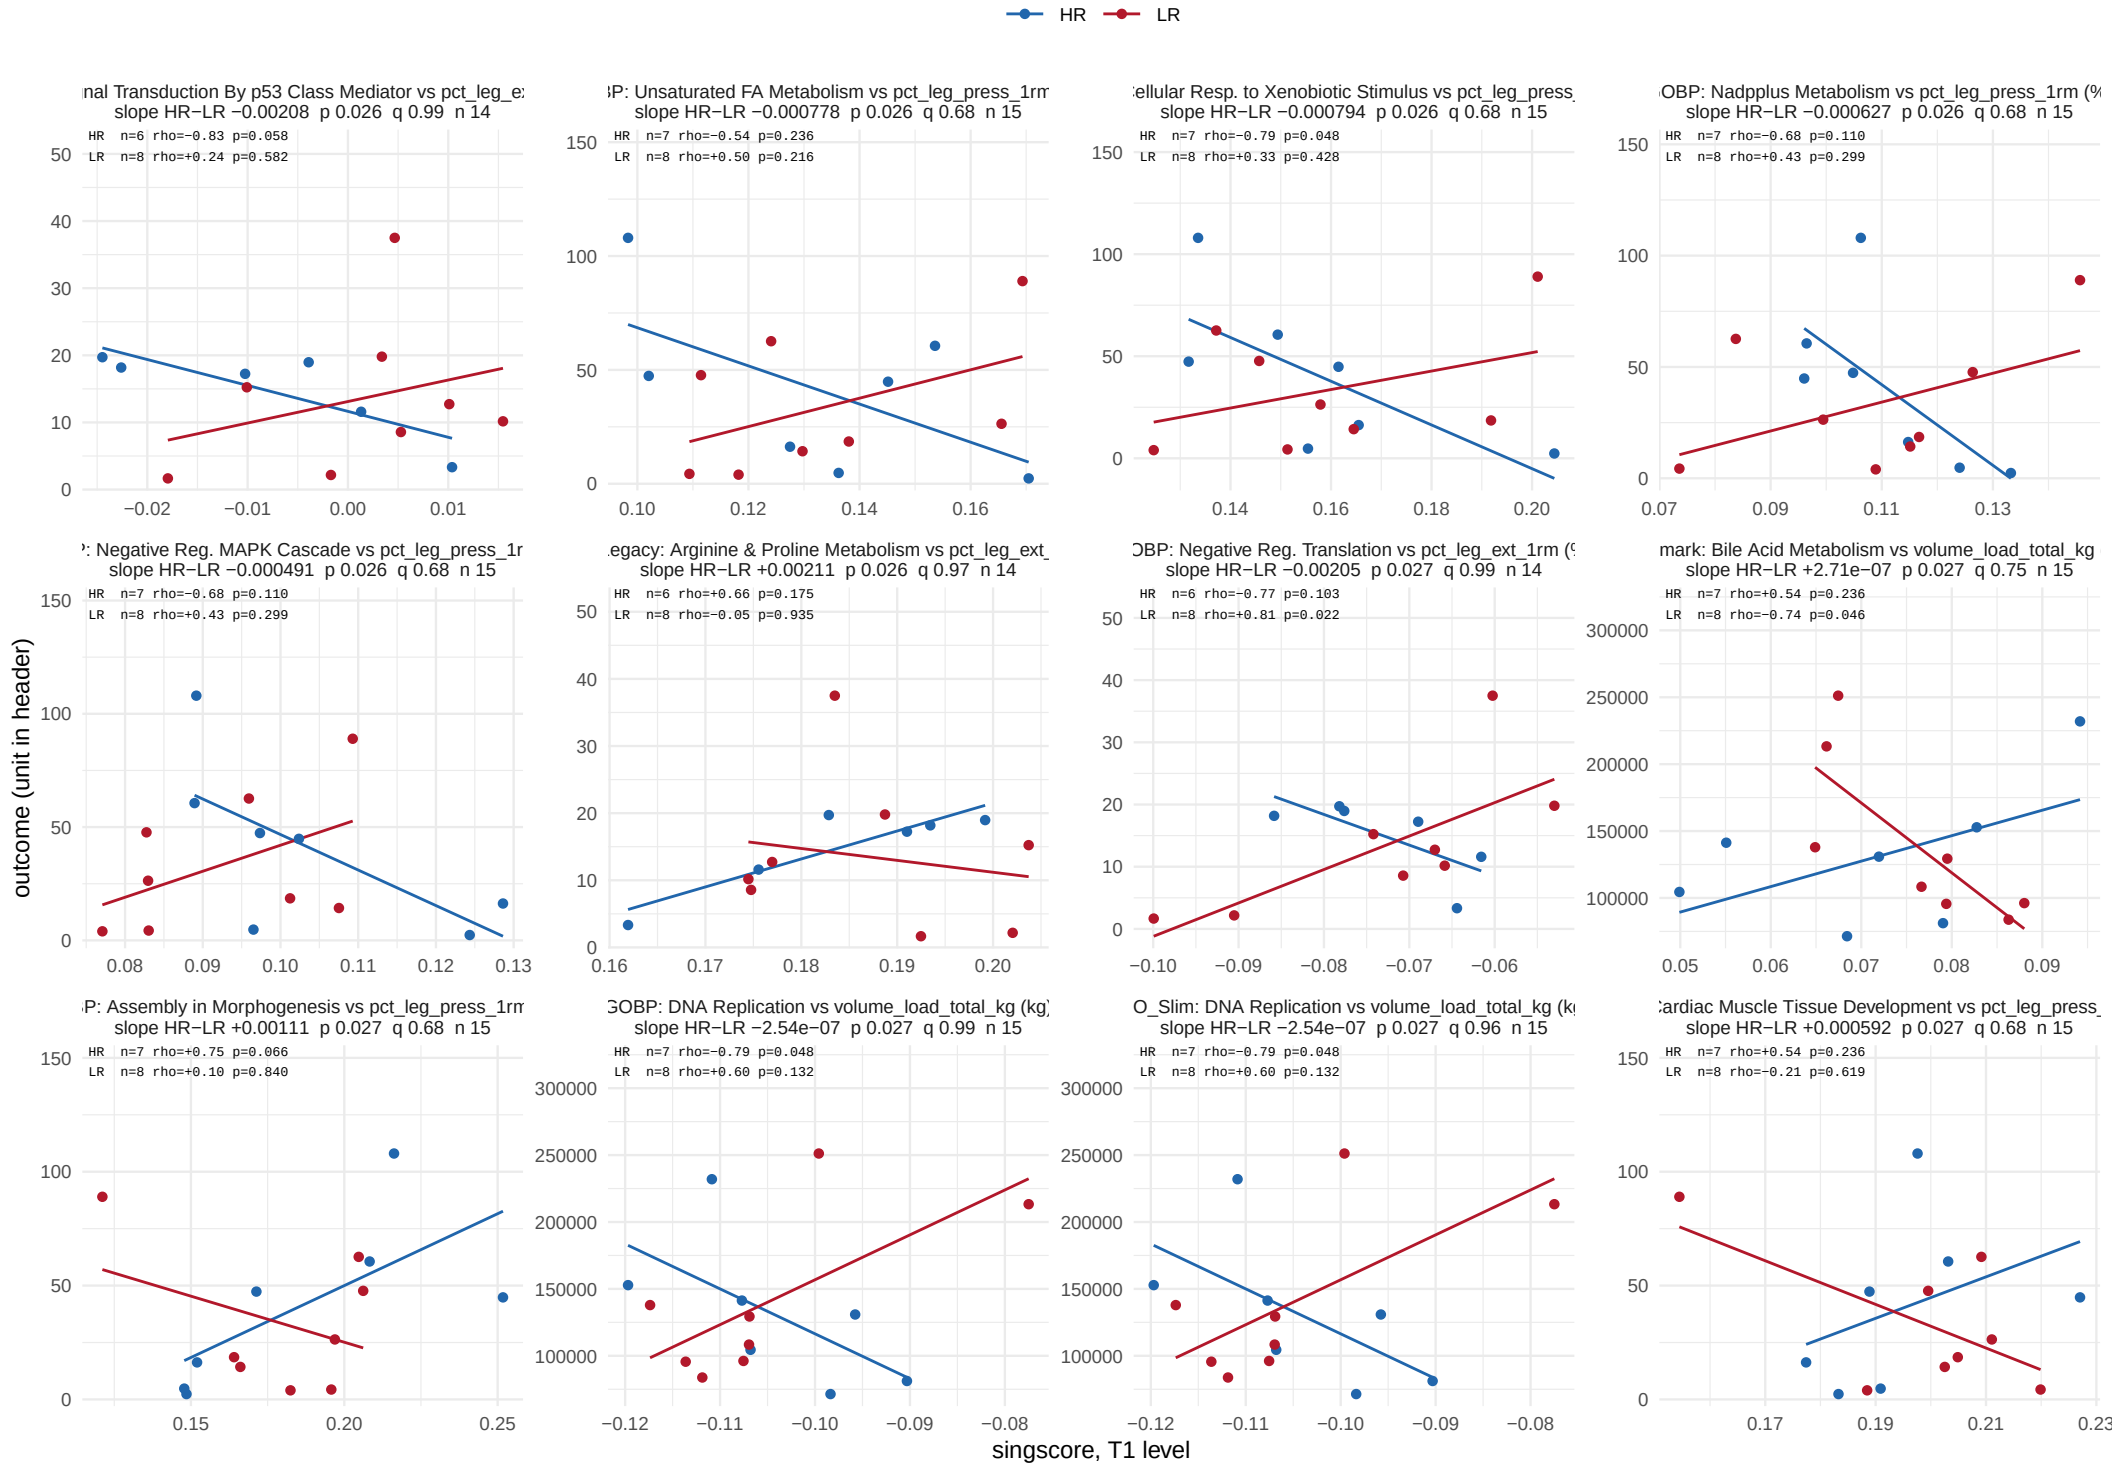

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, baseline window


232 of 9646 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 10 of 20.

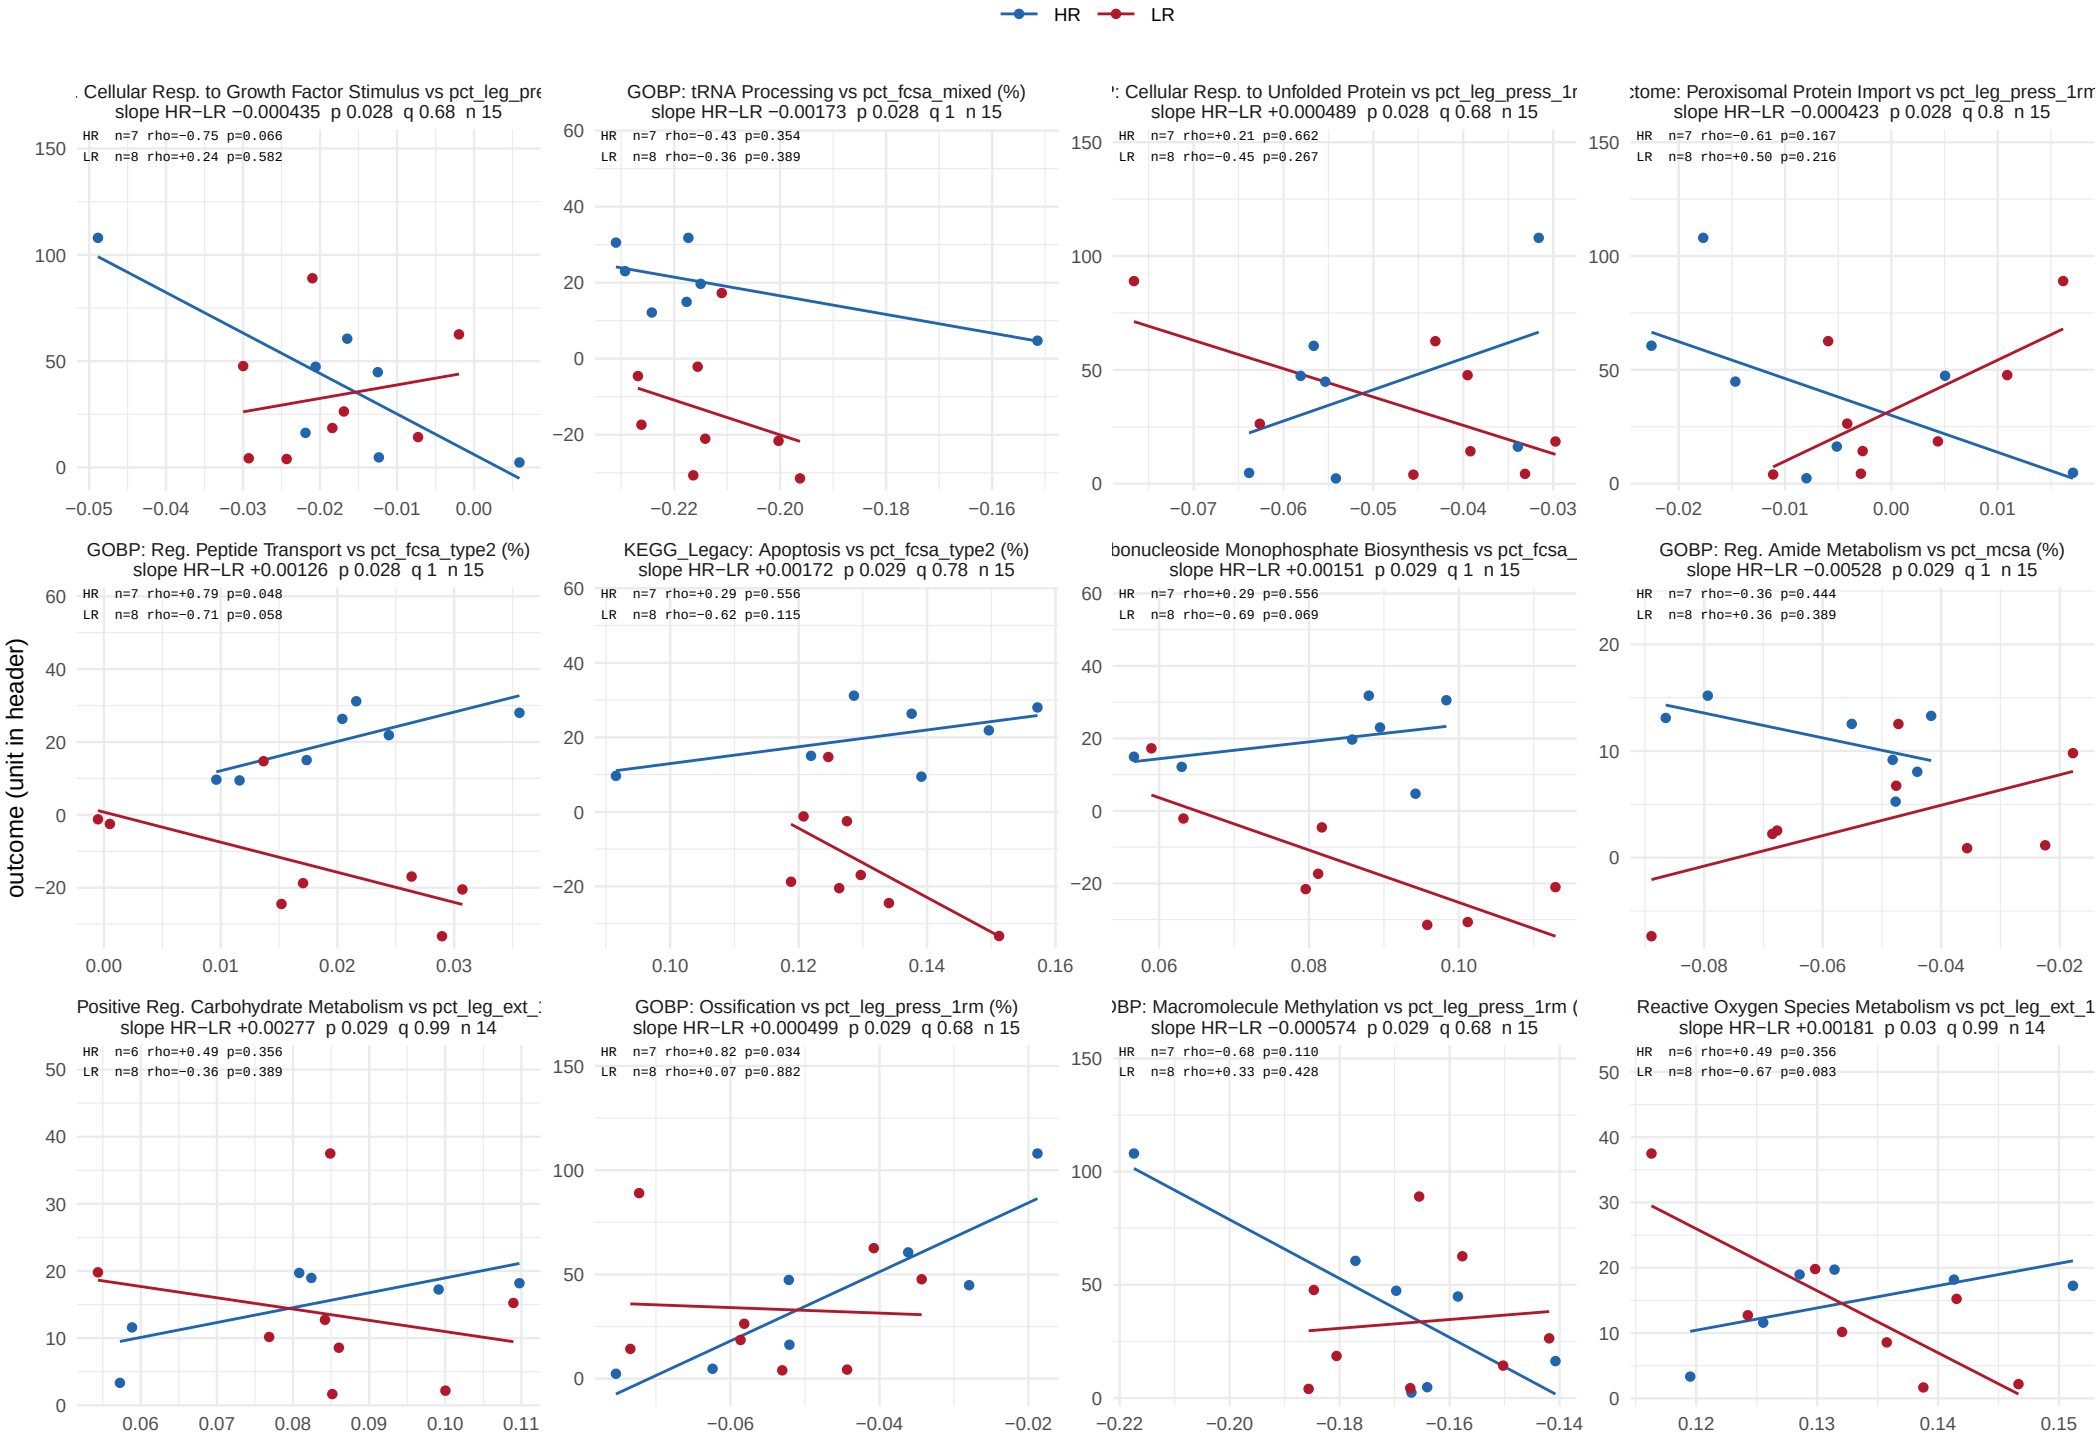

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, baseline window


232 of 9646 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 11 of 20.

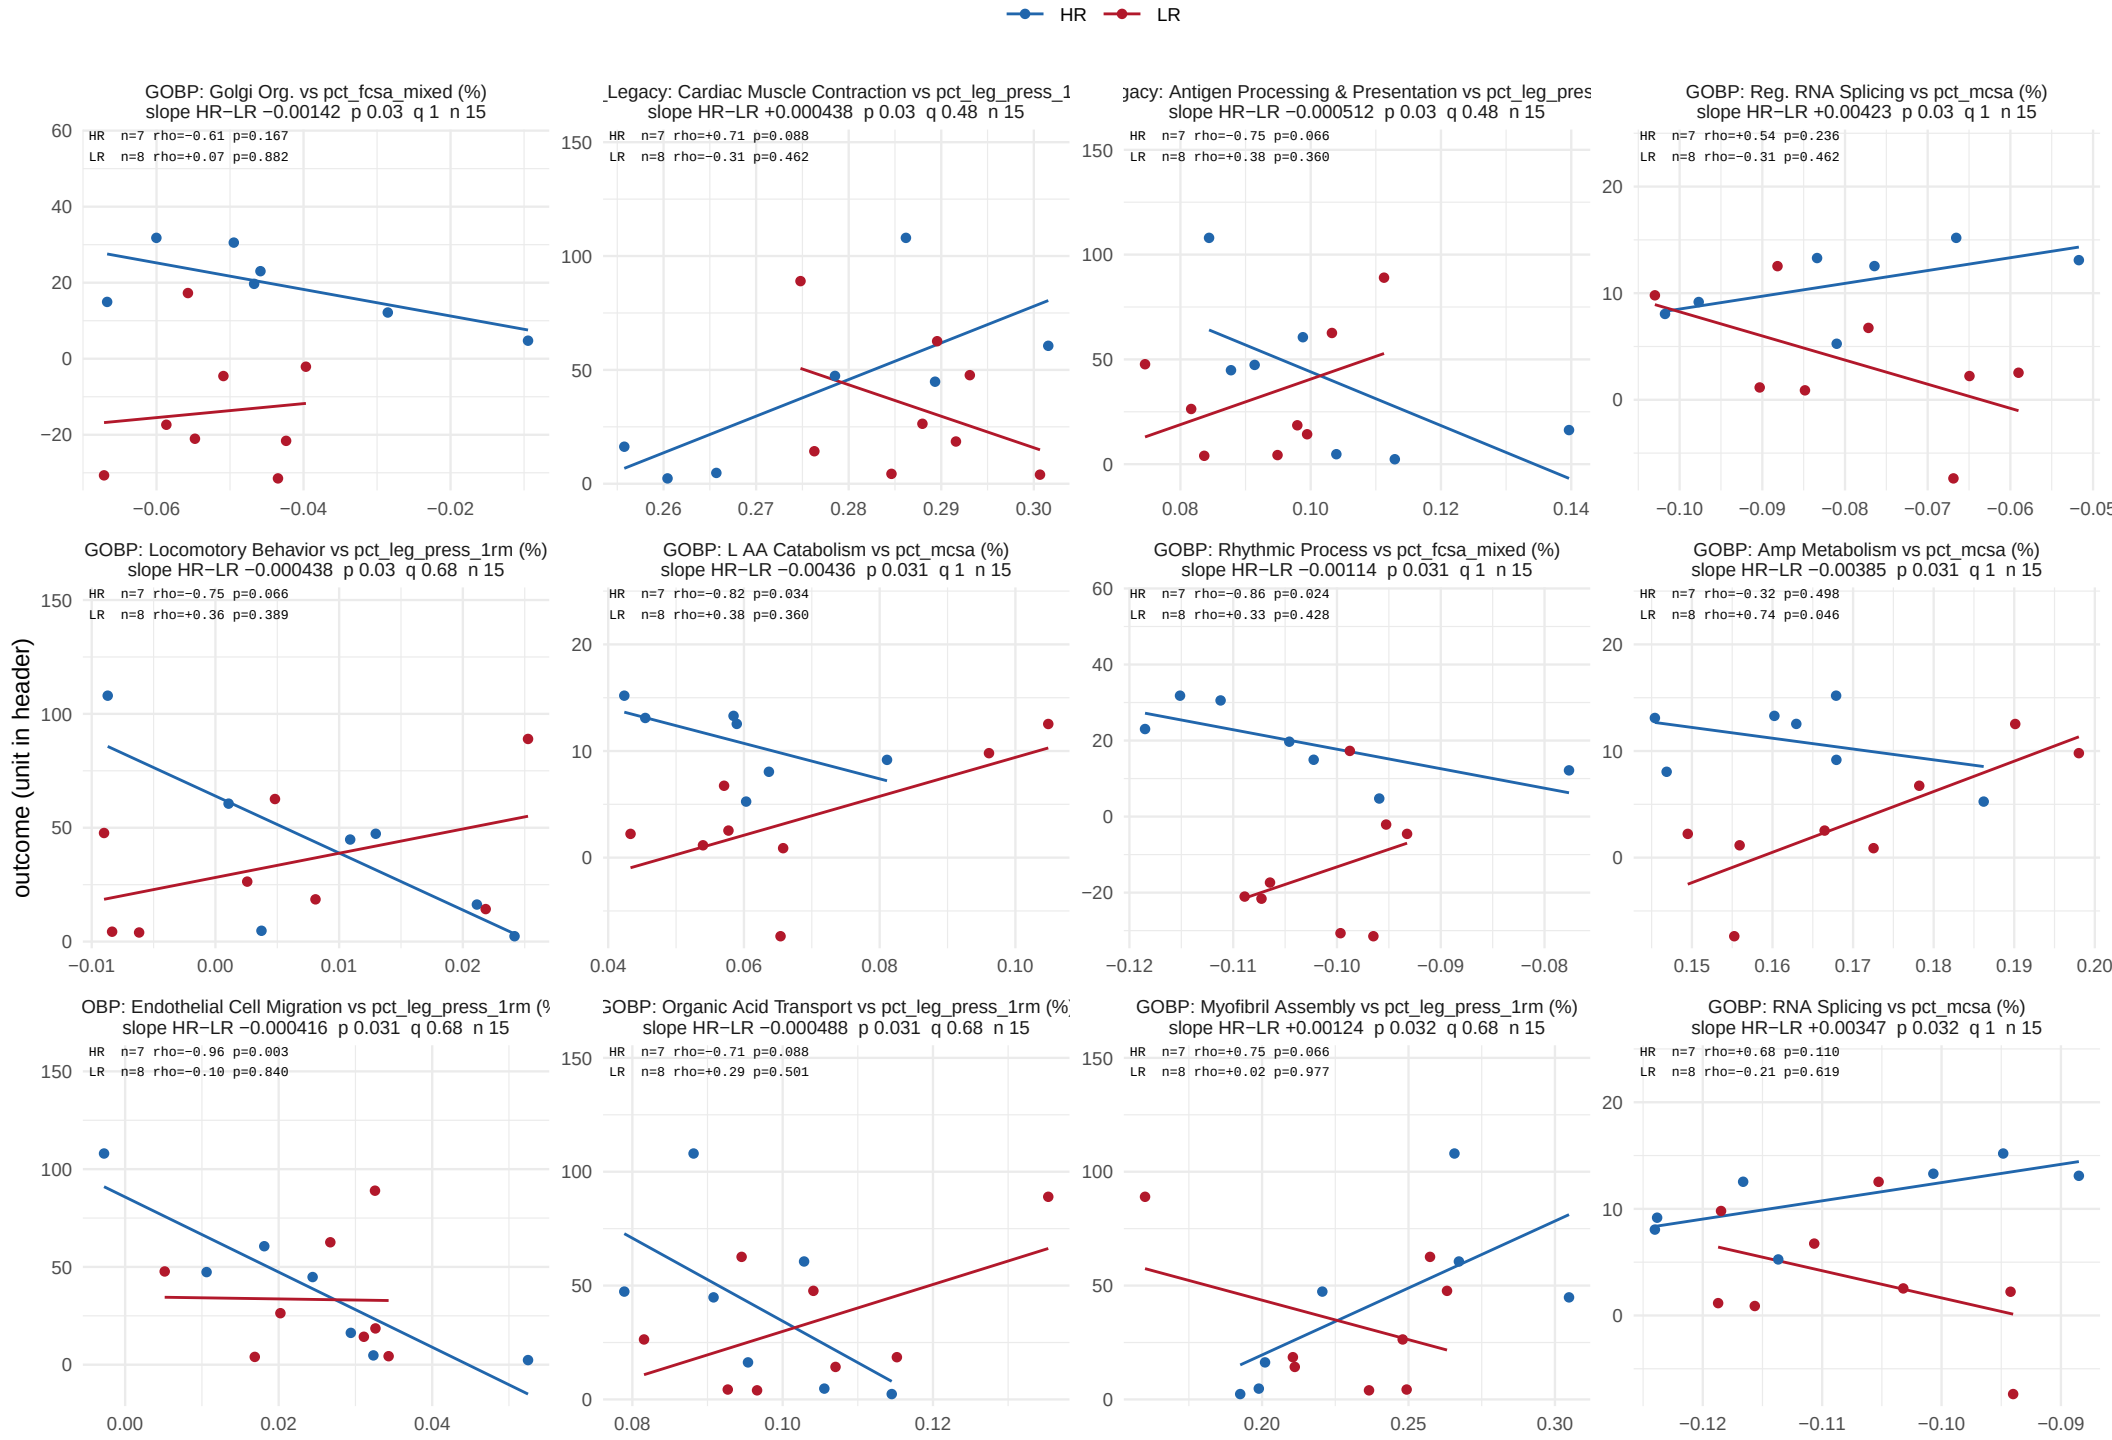

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, baseline window


232 of 9646 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 12 of 20.

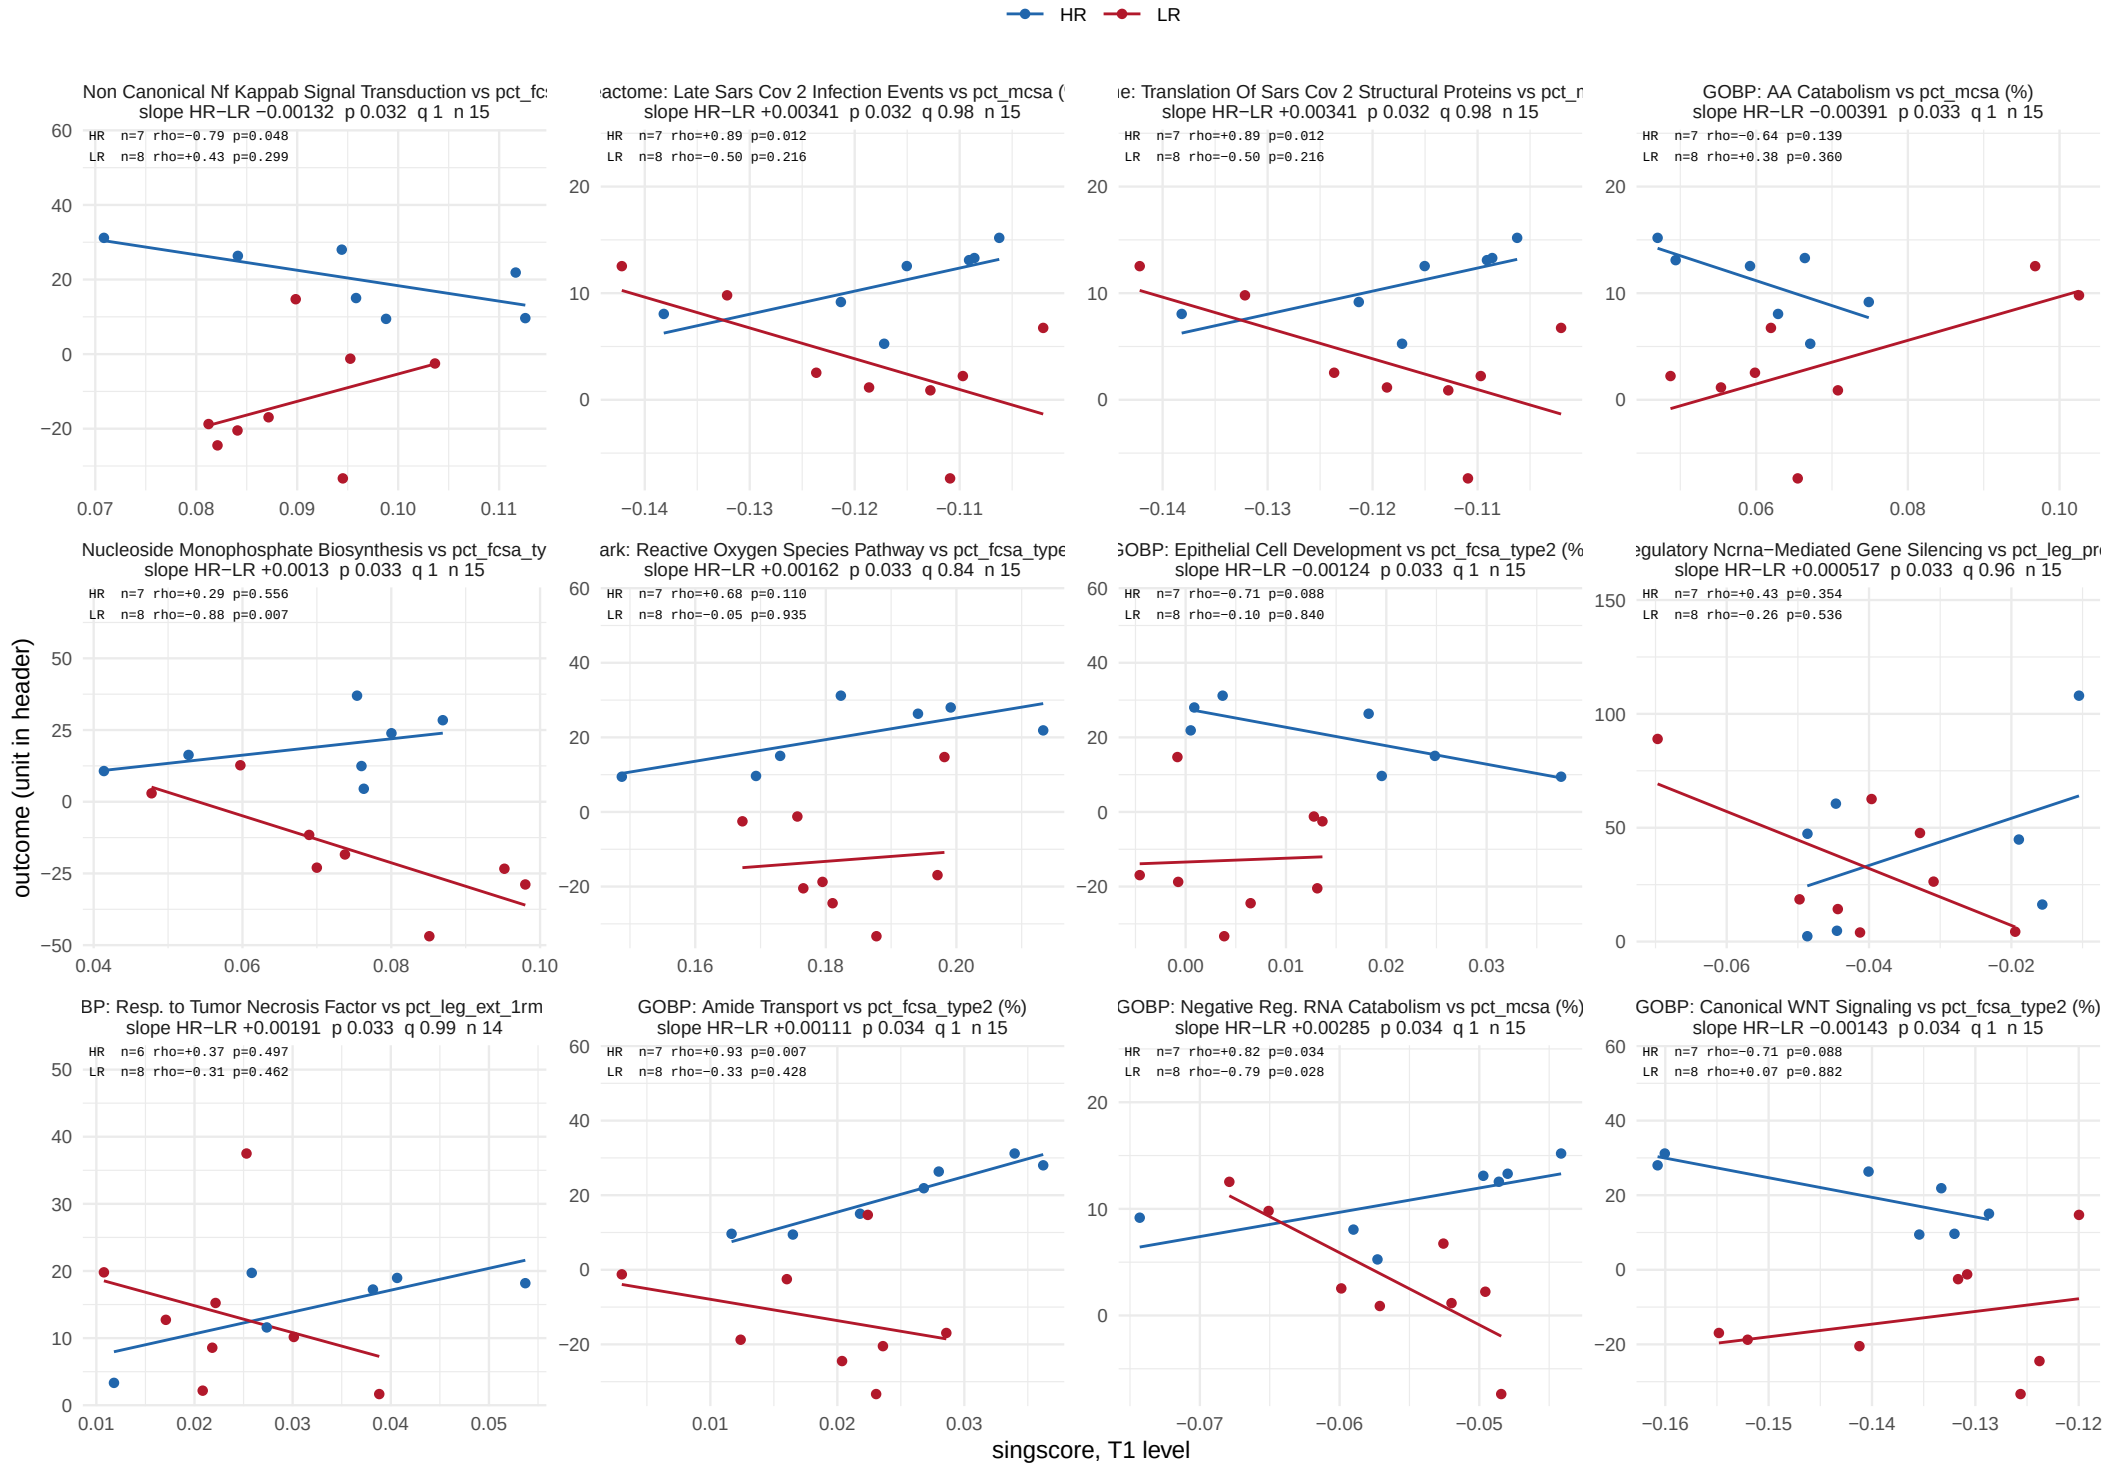

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, baseline window


232 of 9646 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 13 of 20.

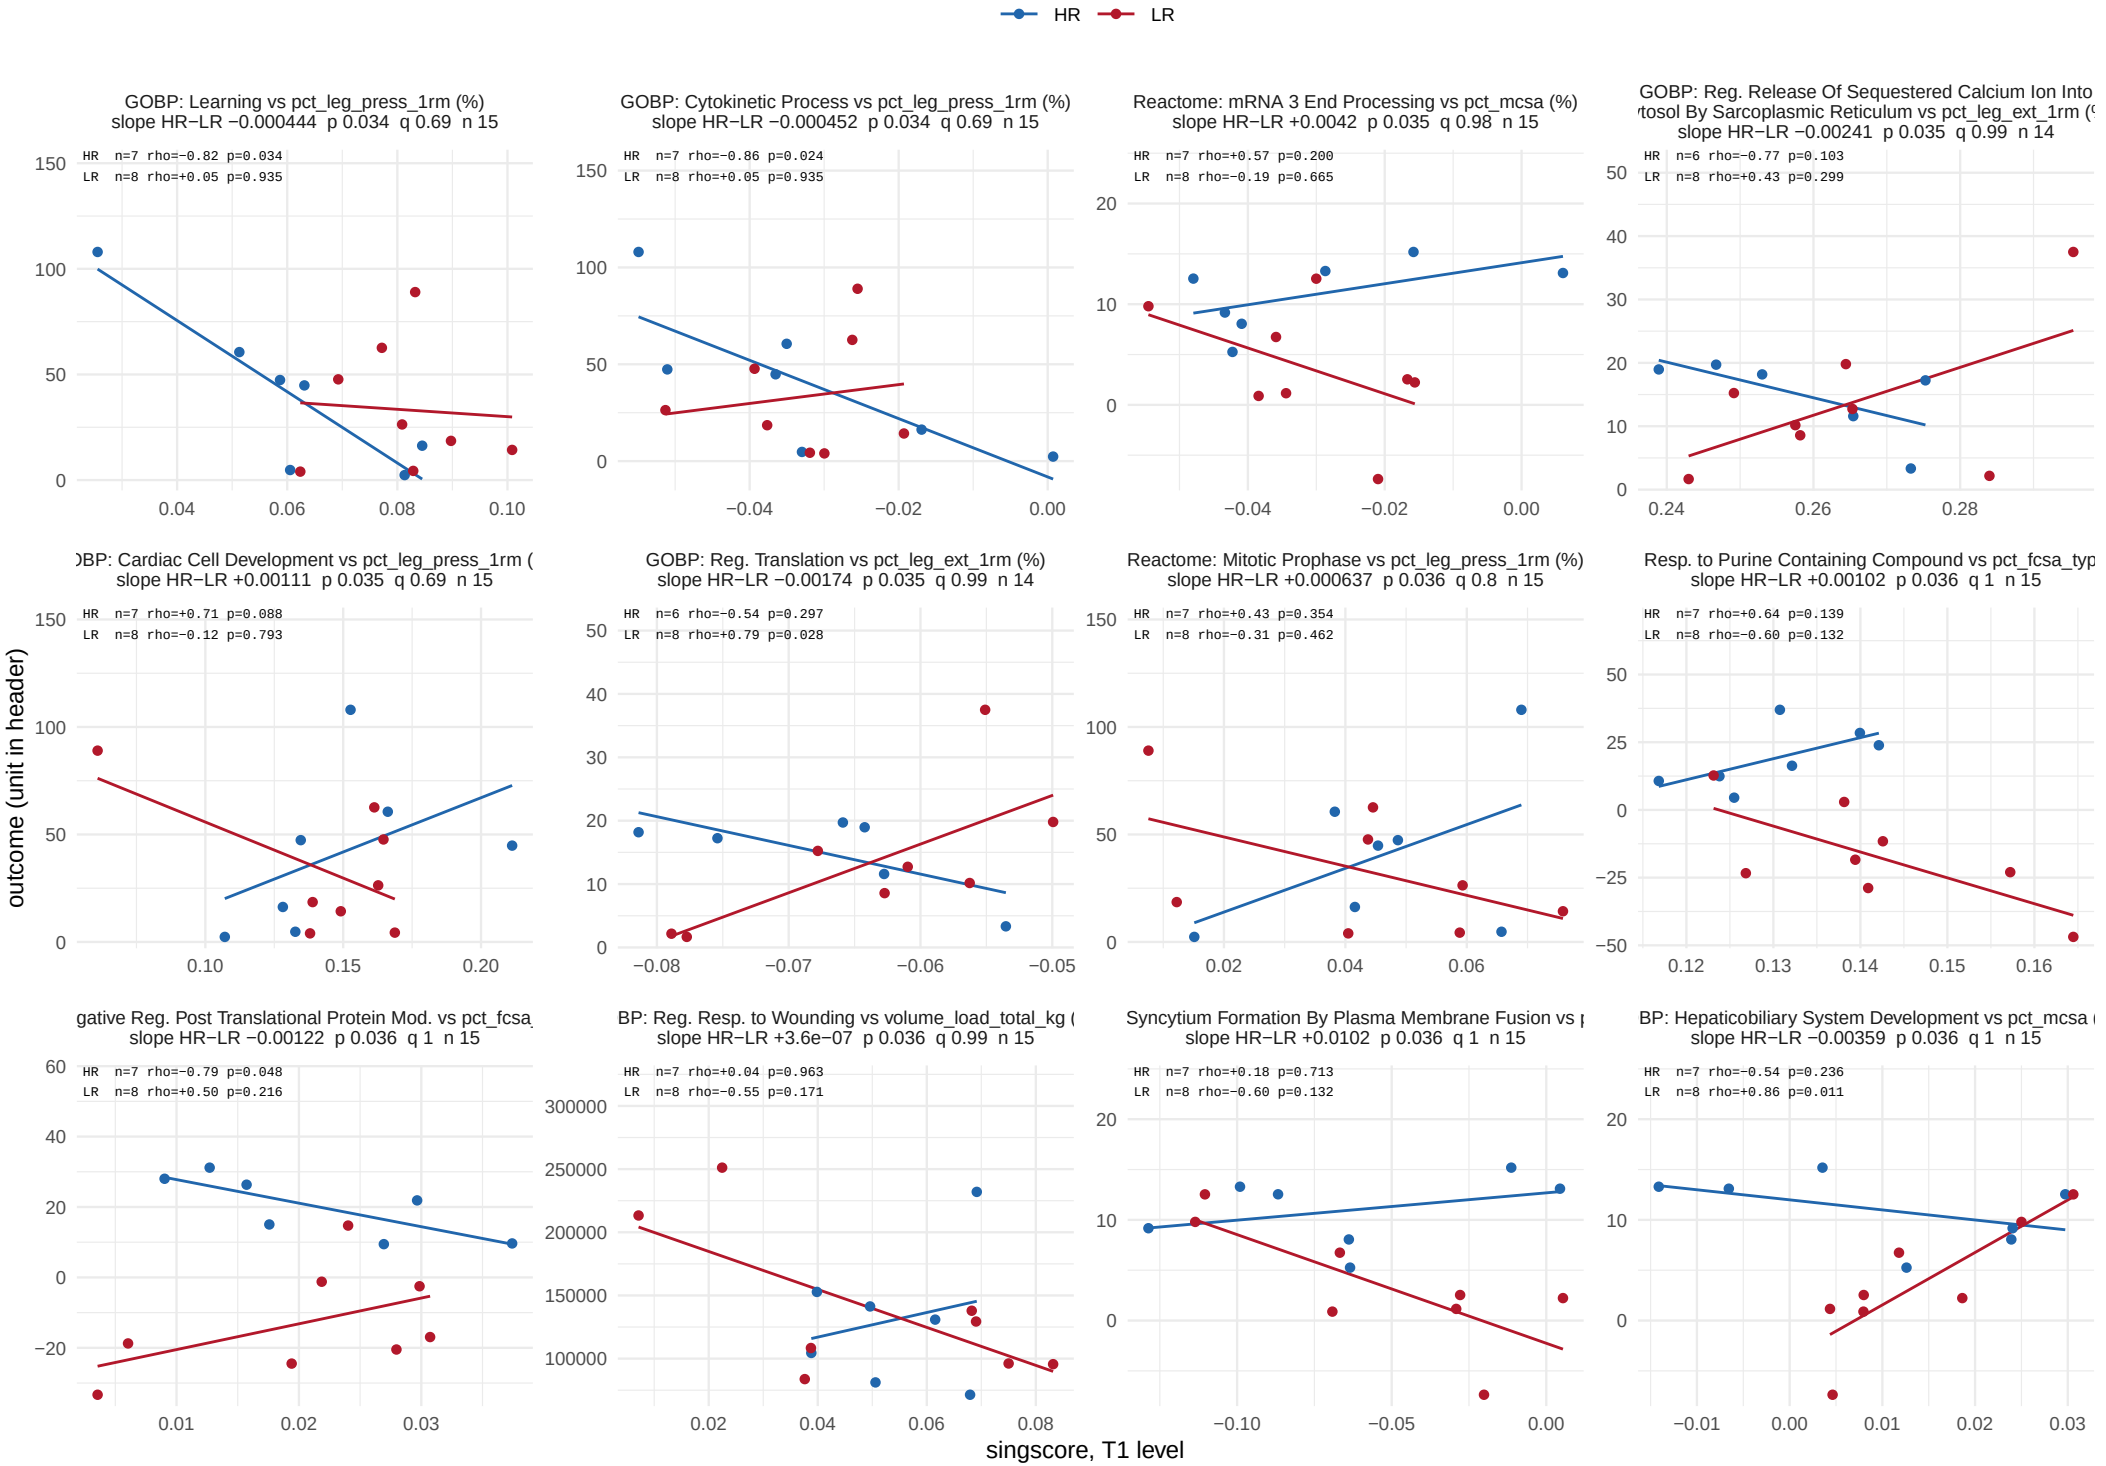

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, baseline window


232 of 9646 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 14 of 20.

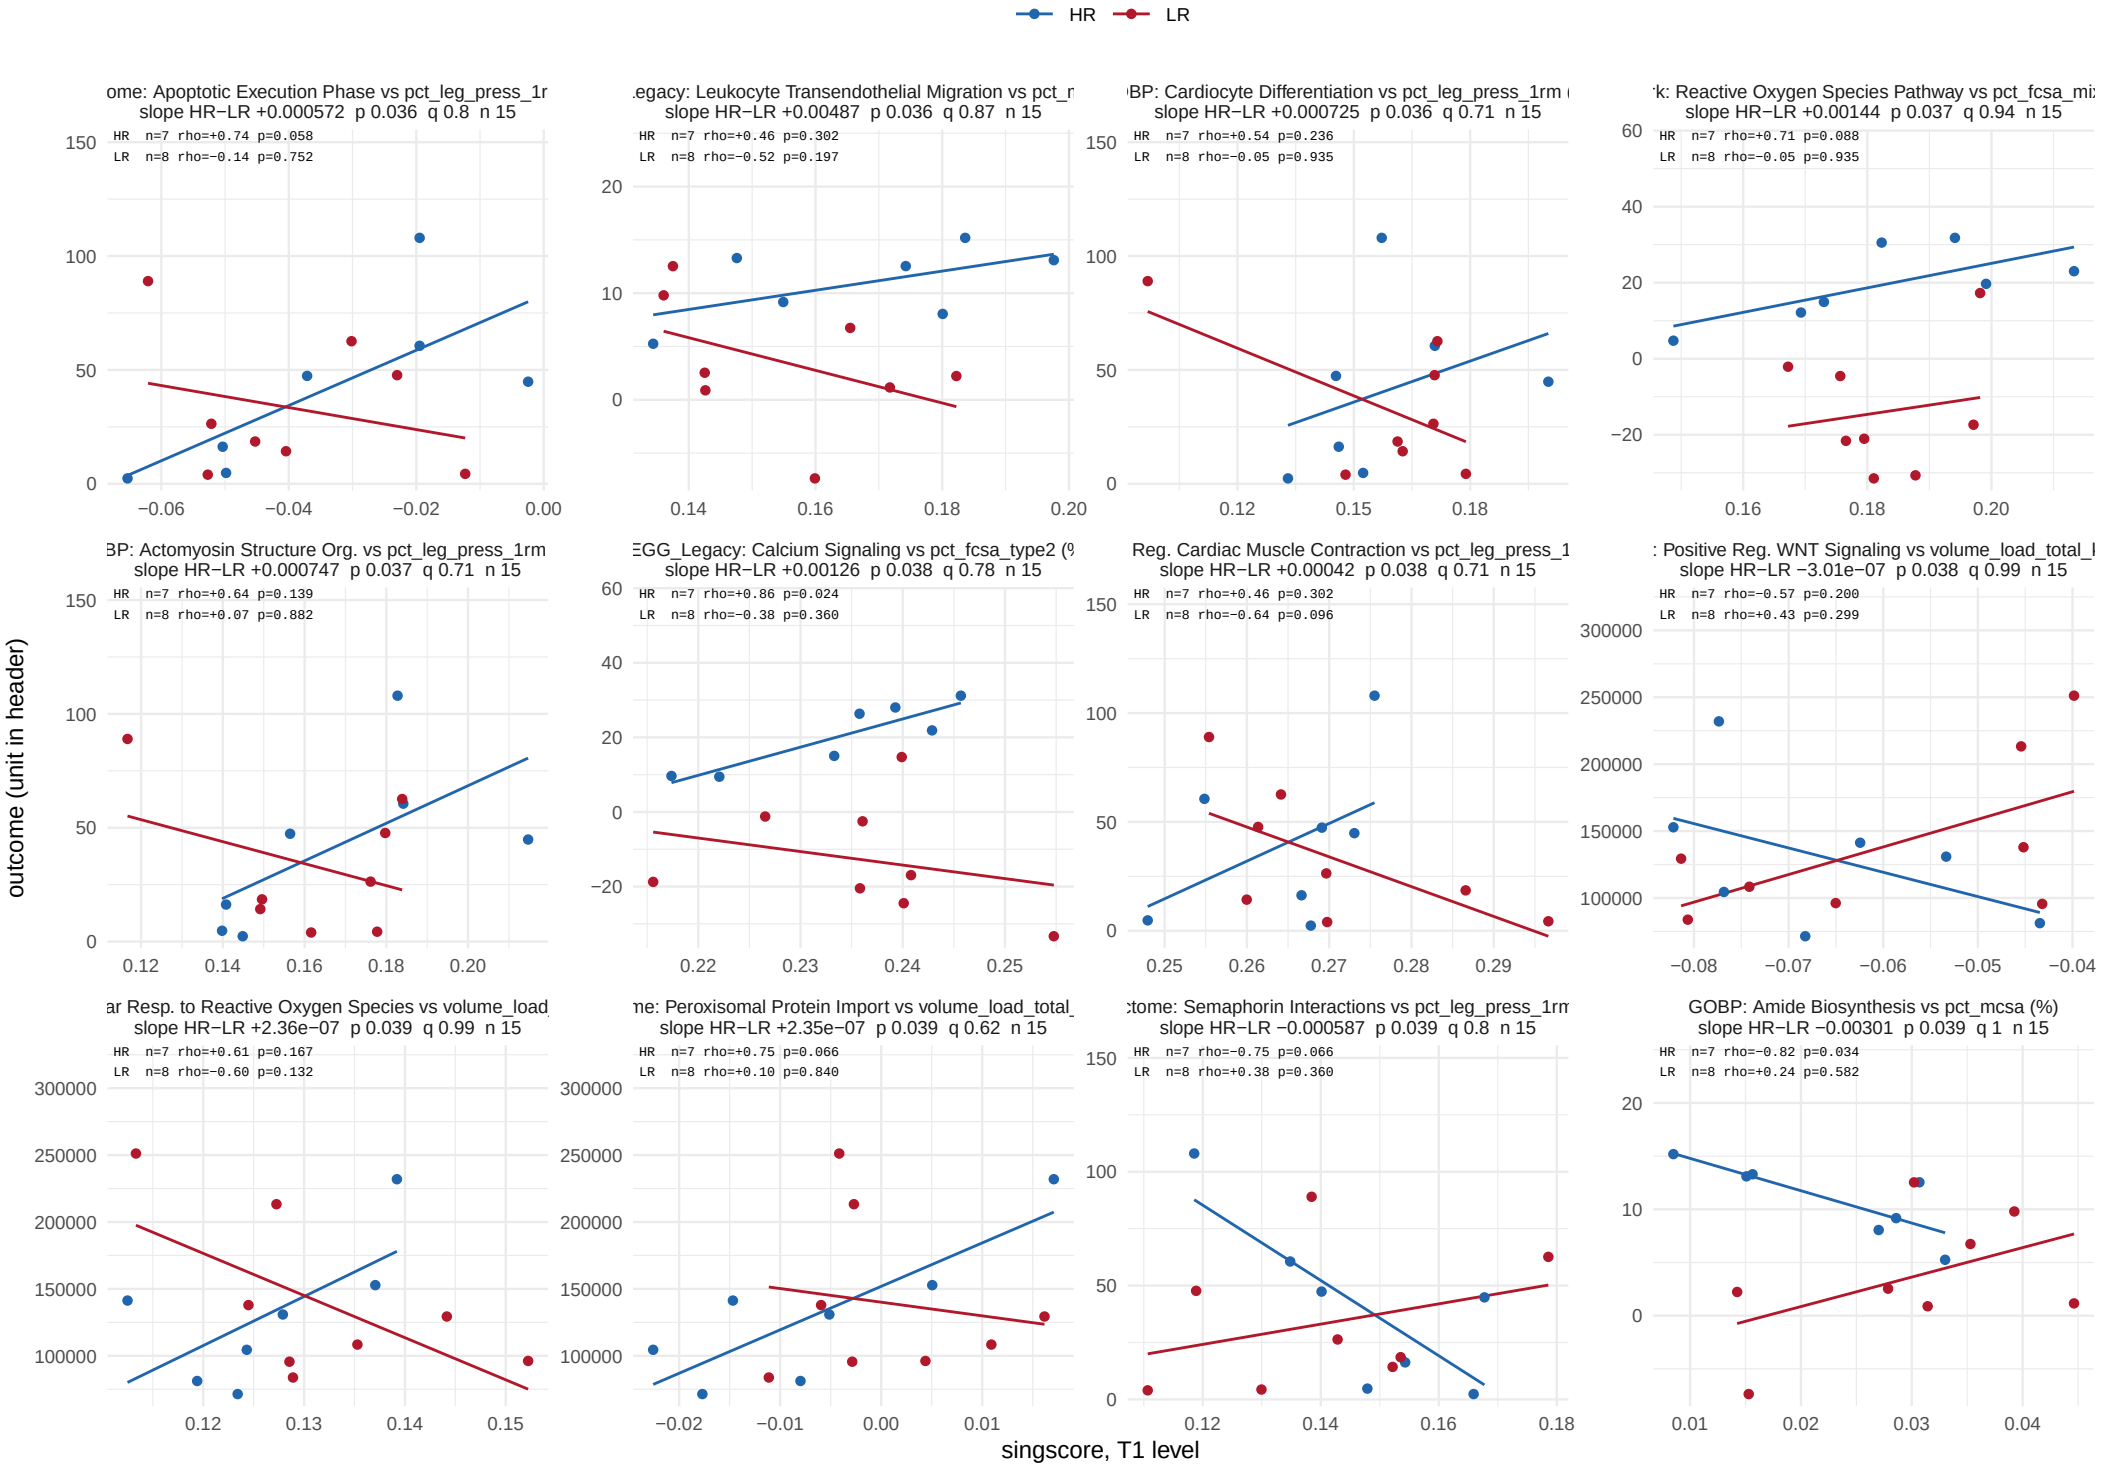

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, baseline window


232 of 9646 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 15 of 20.

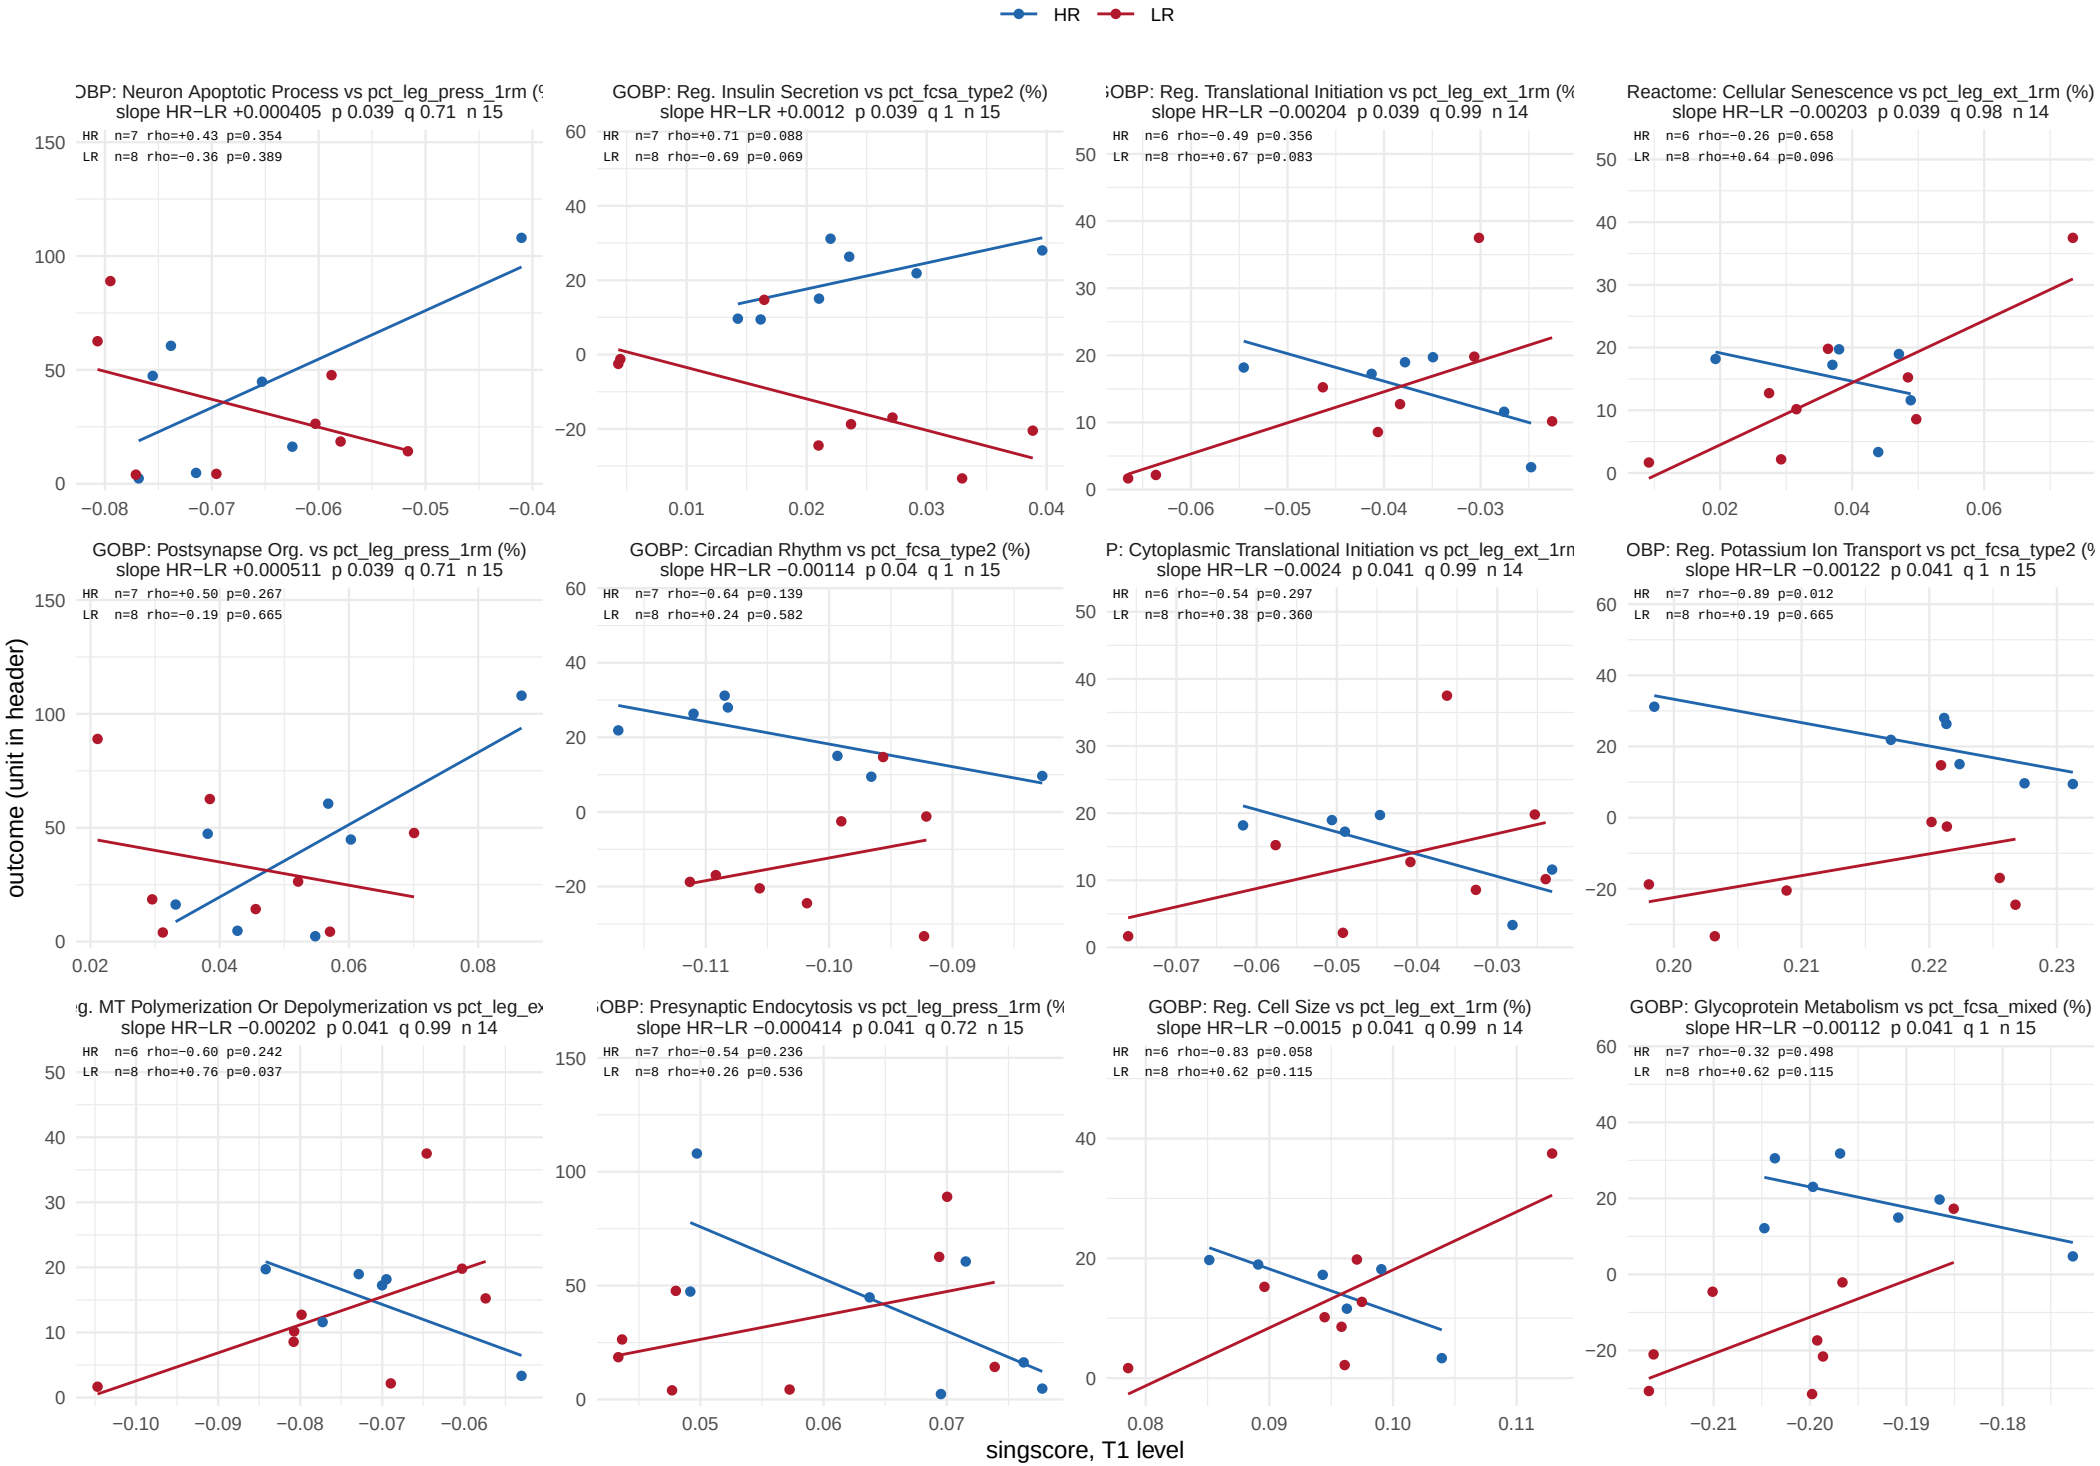

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, baseline window


232 of 9646 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 16 of 20.

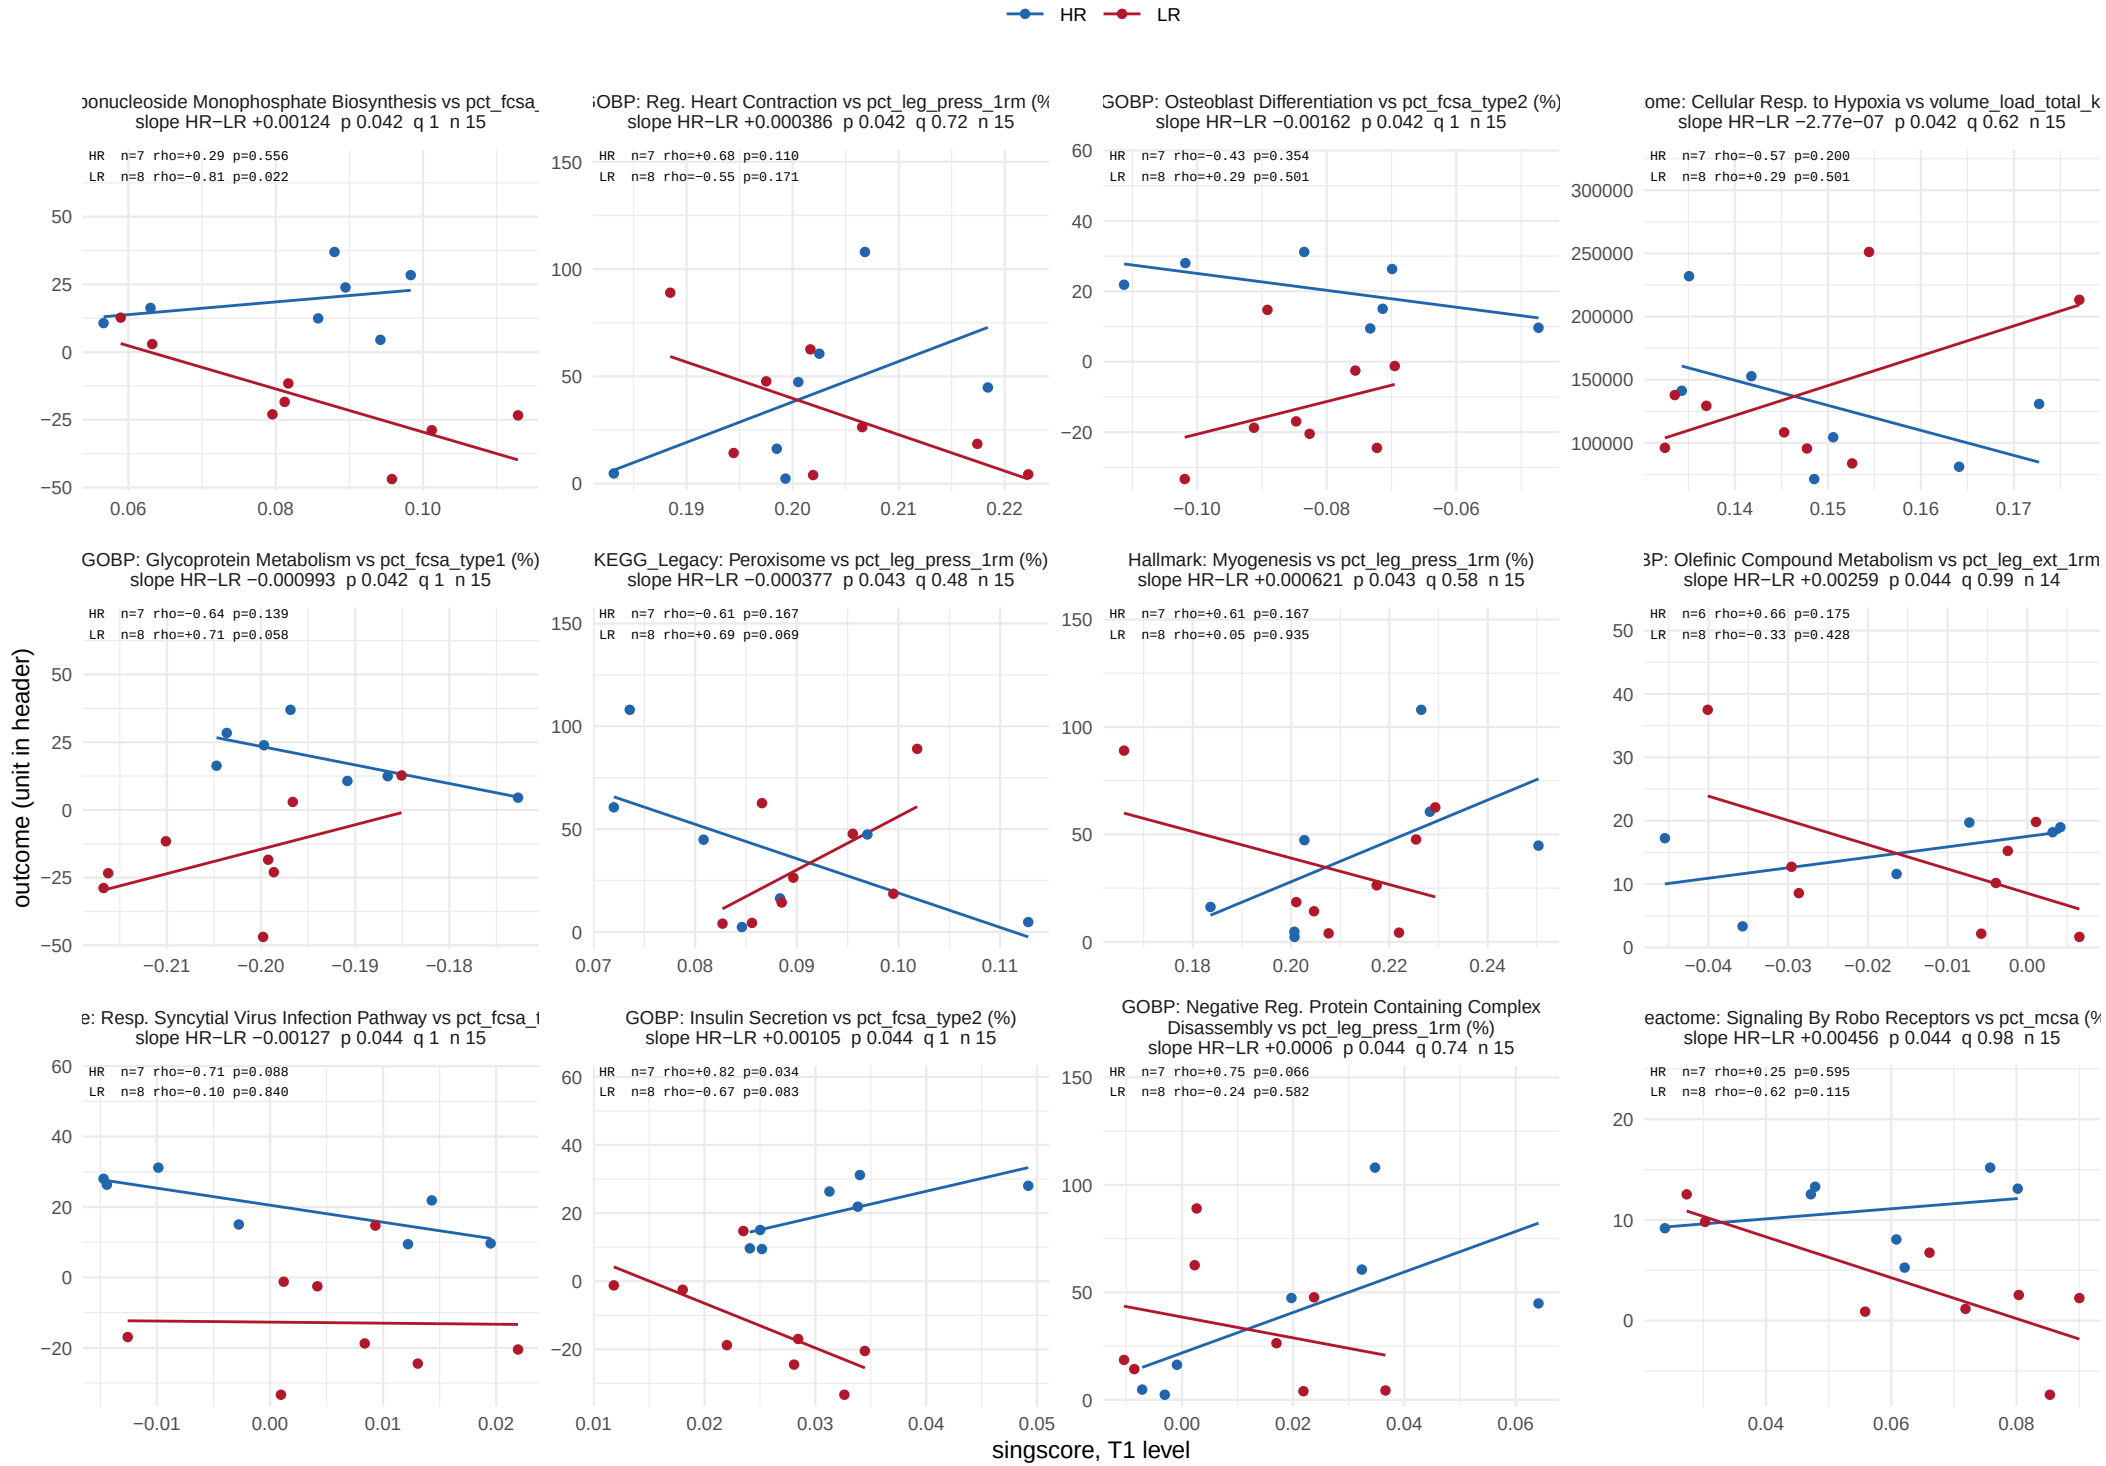

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, baseline window


232 of 9646 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 17 of 20.

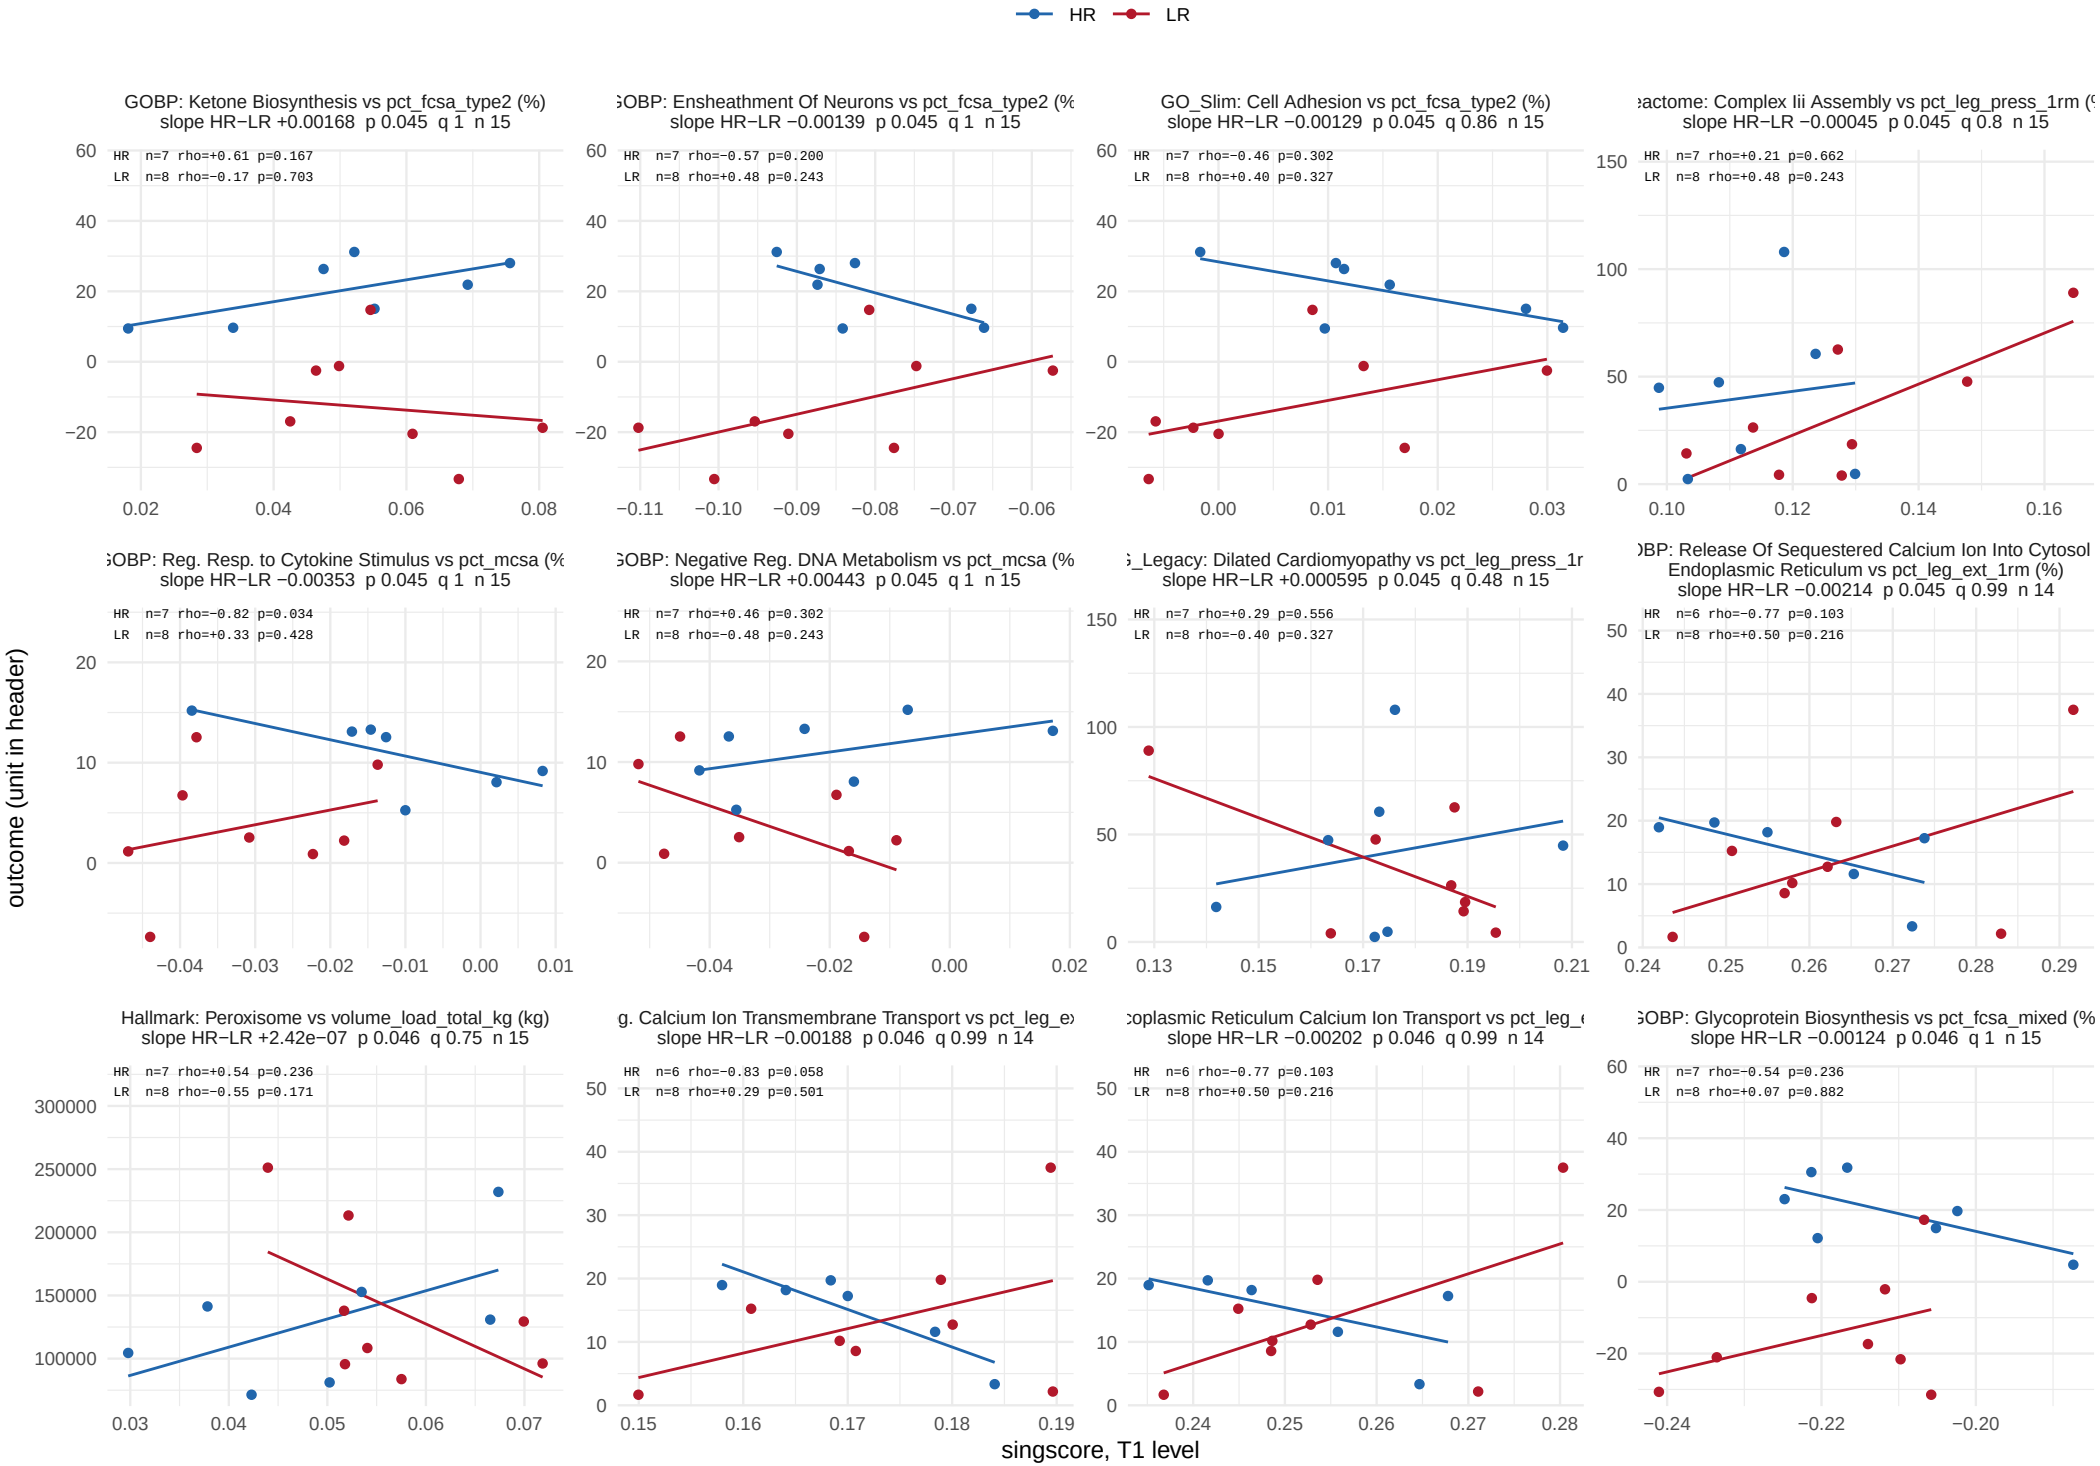

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, baseline window


232 of 9646 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 18 of 20.

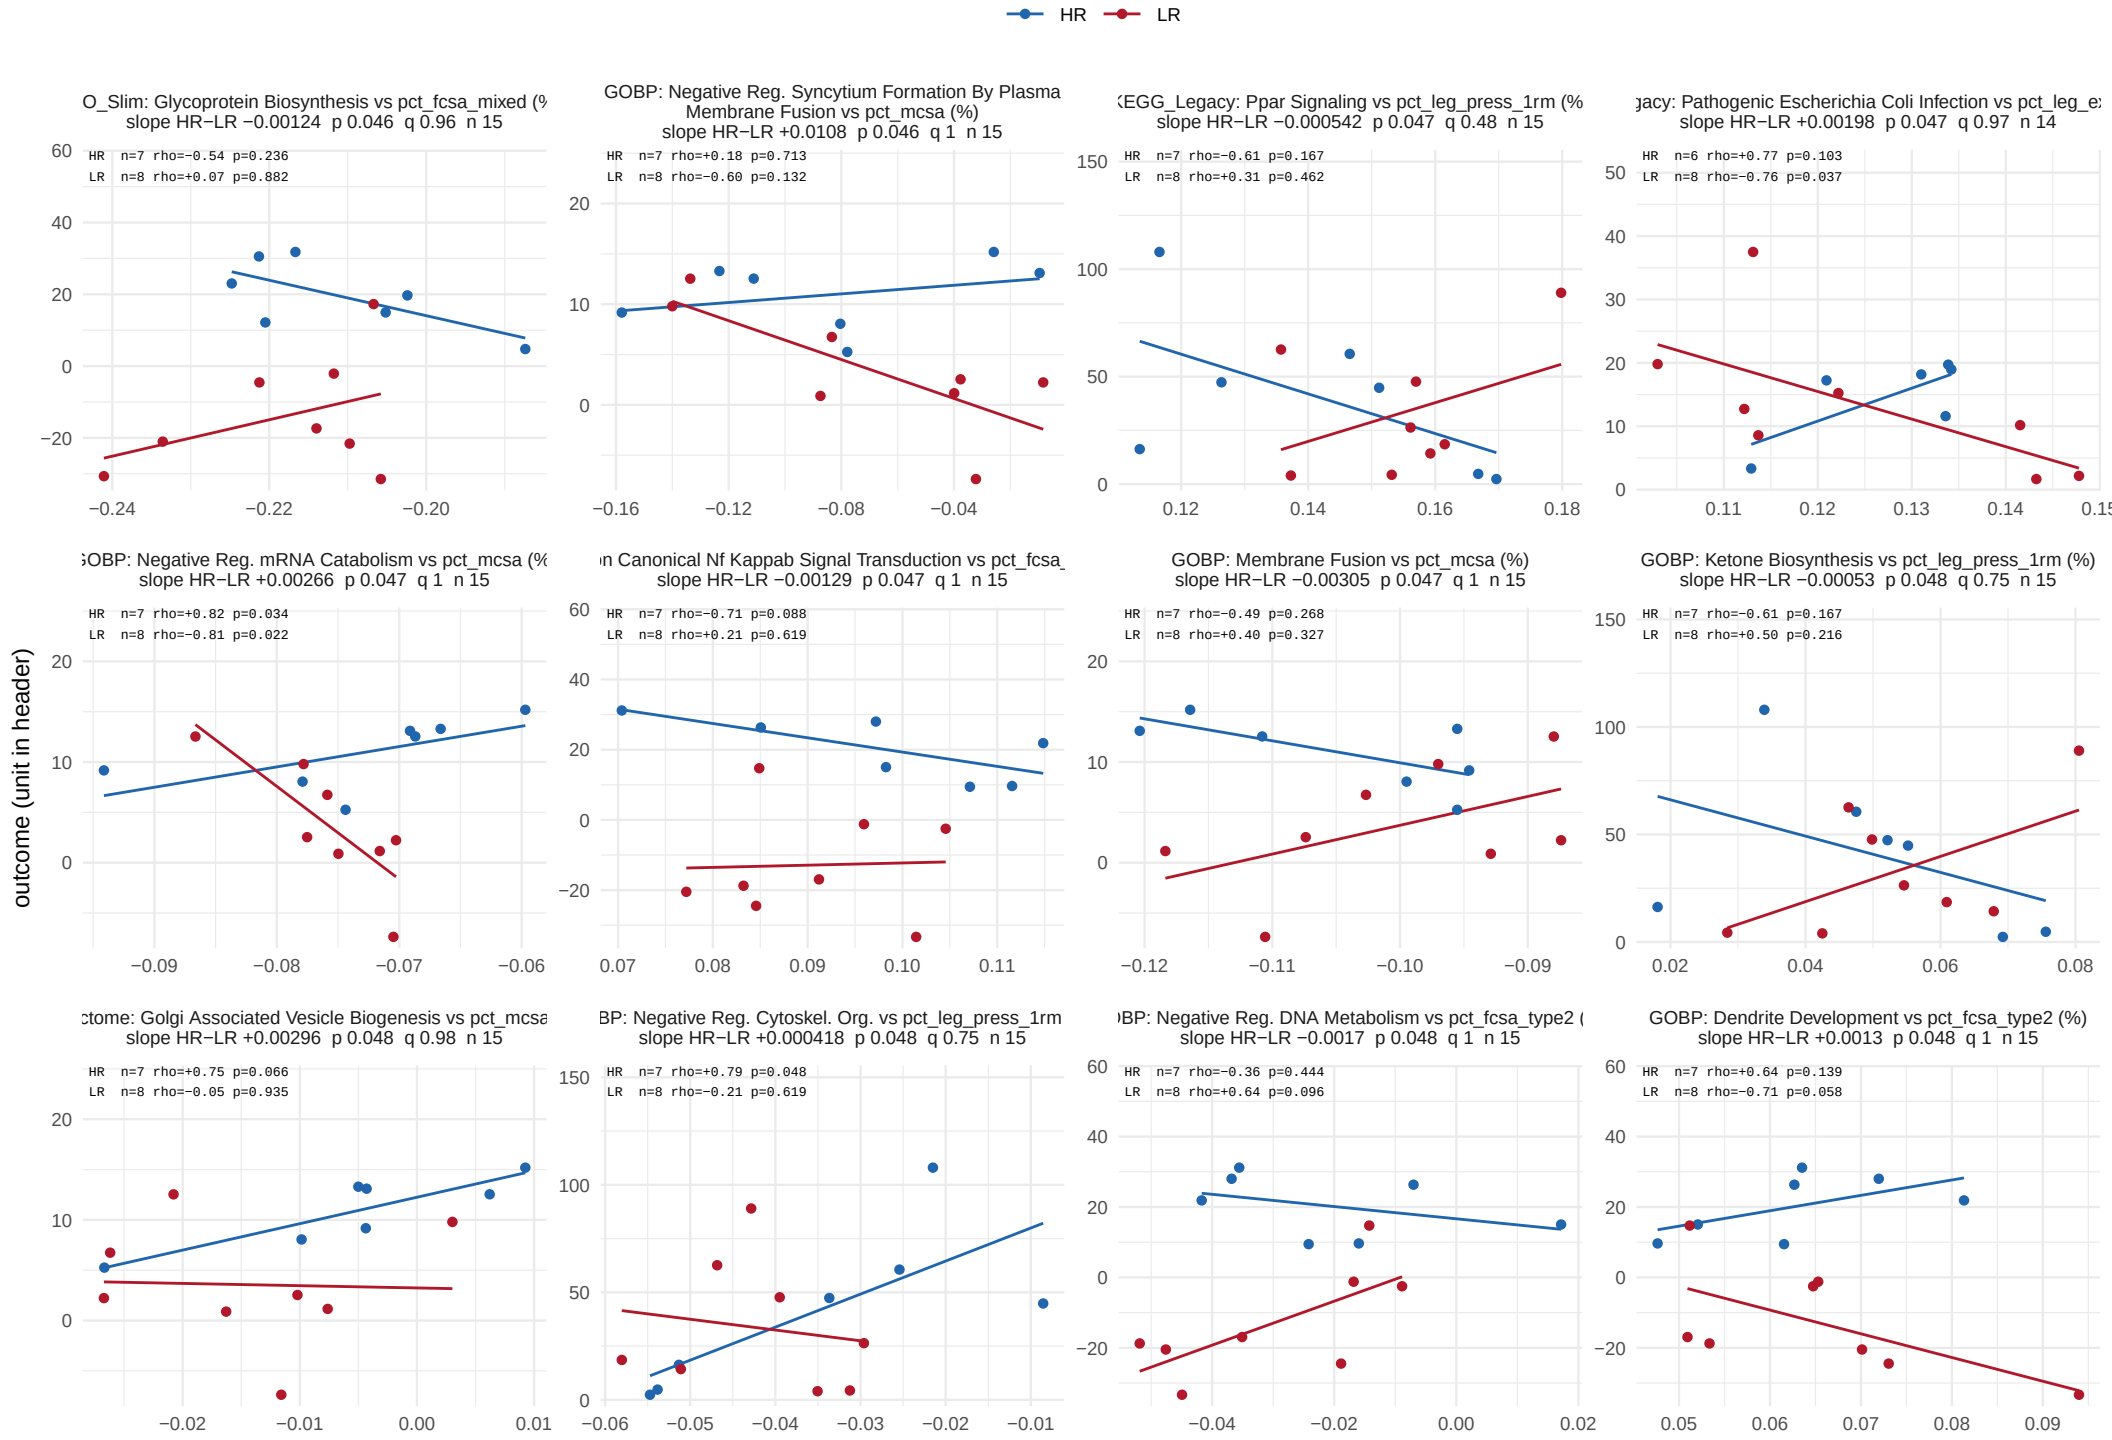

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, baseline window


232 of 9646 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 19 of 20.

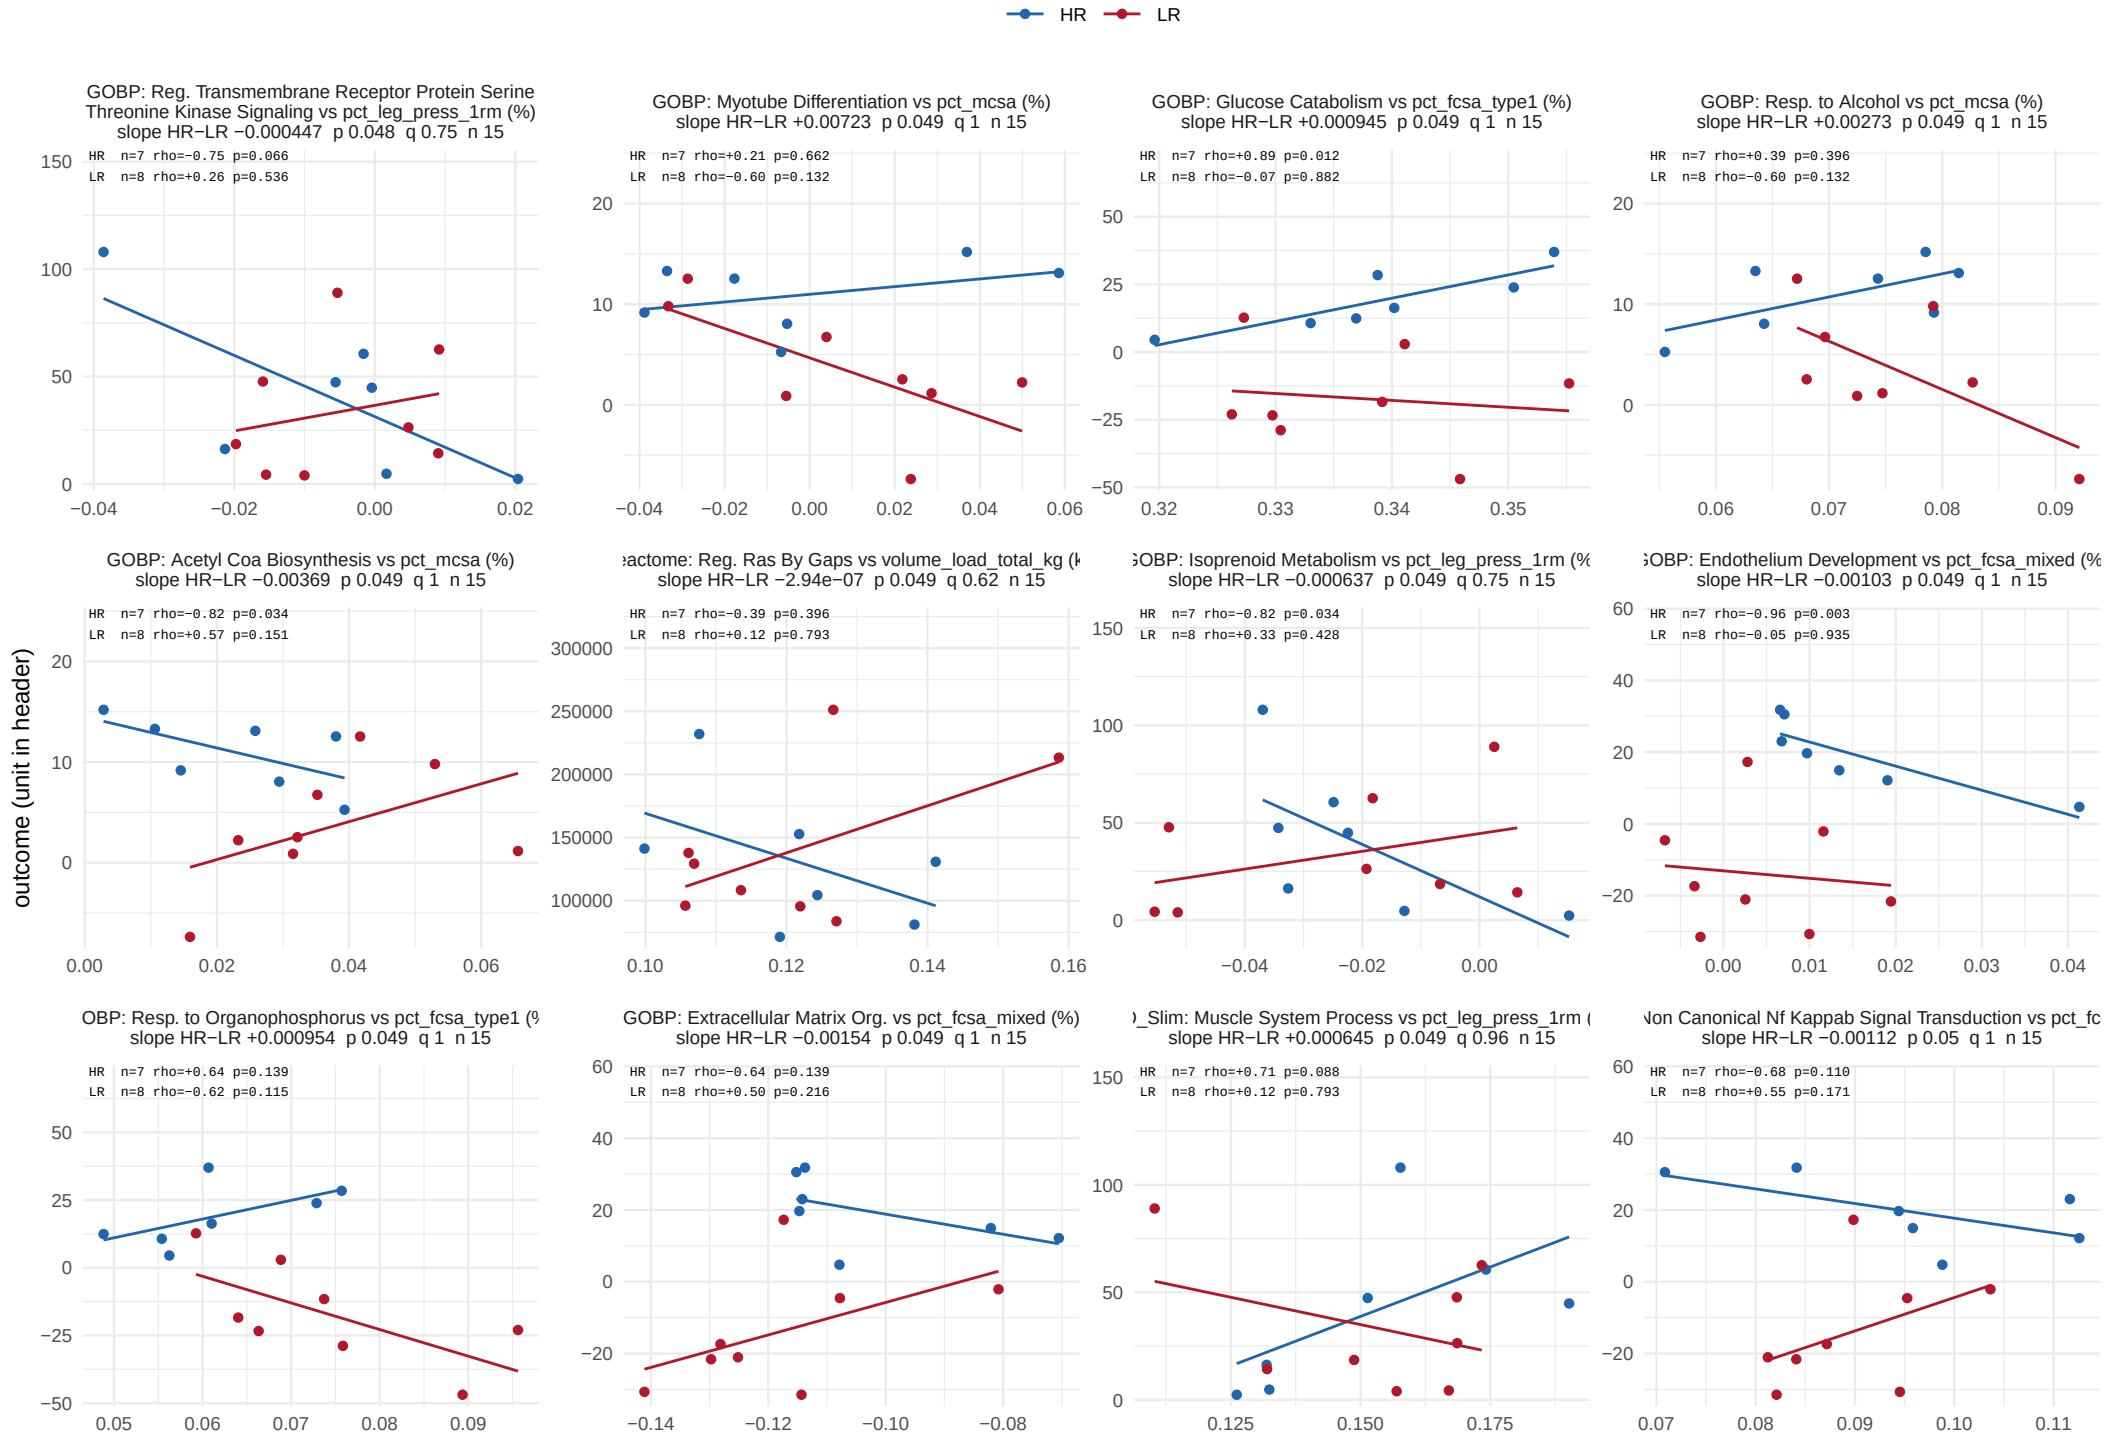

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, baseline window


232 of 9646 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 20 of 20.

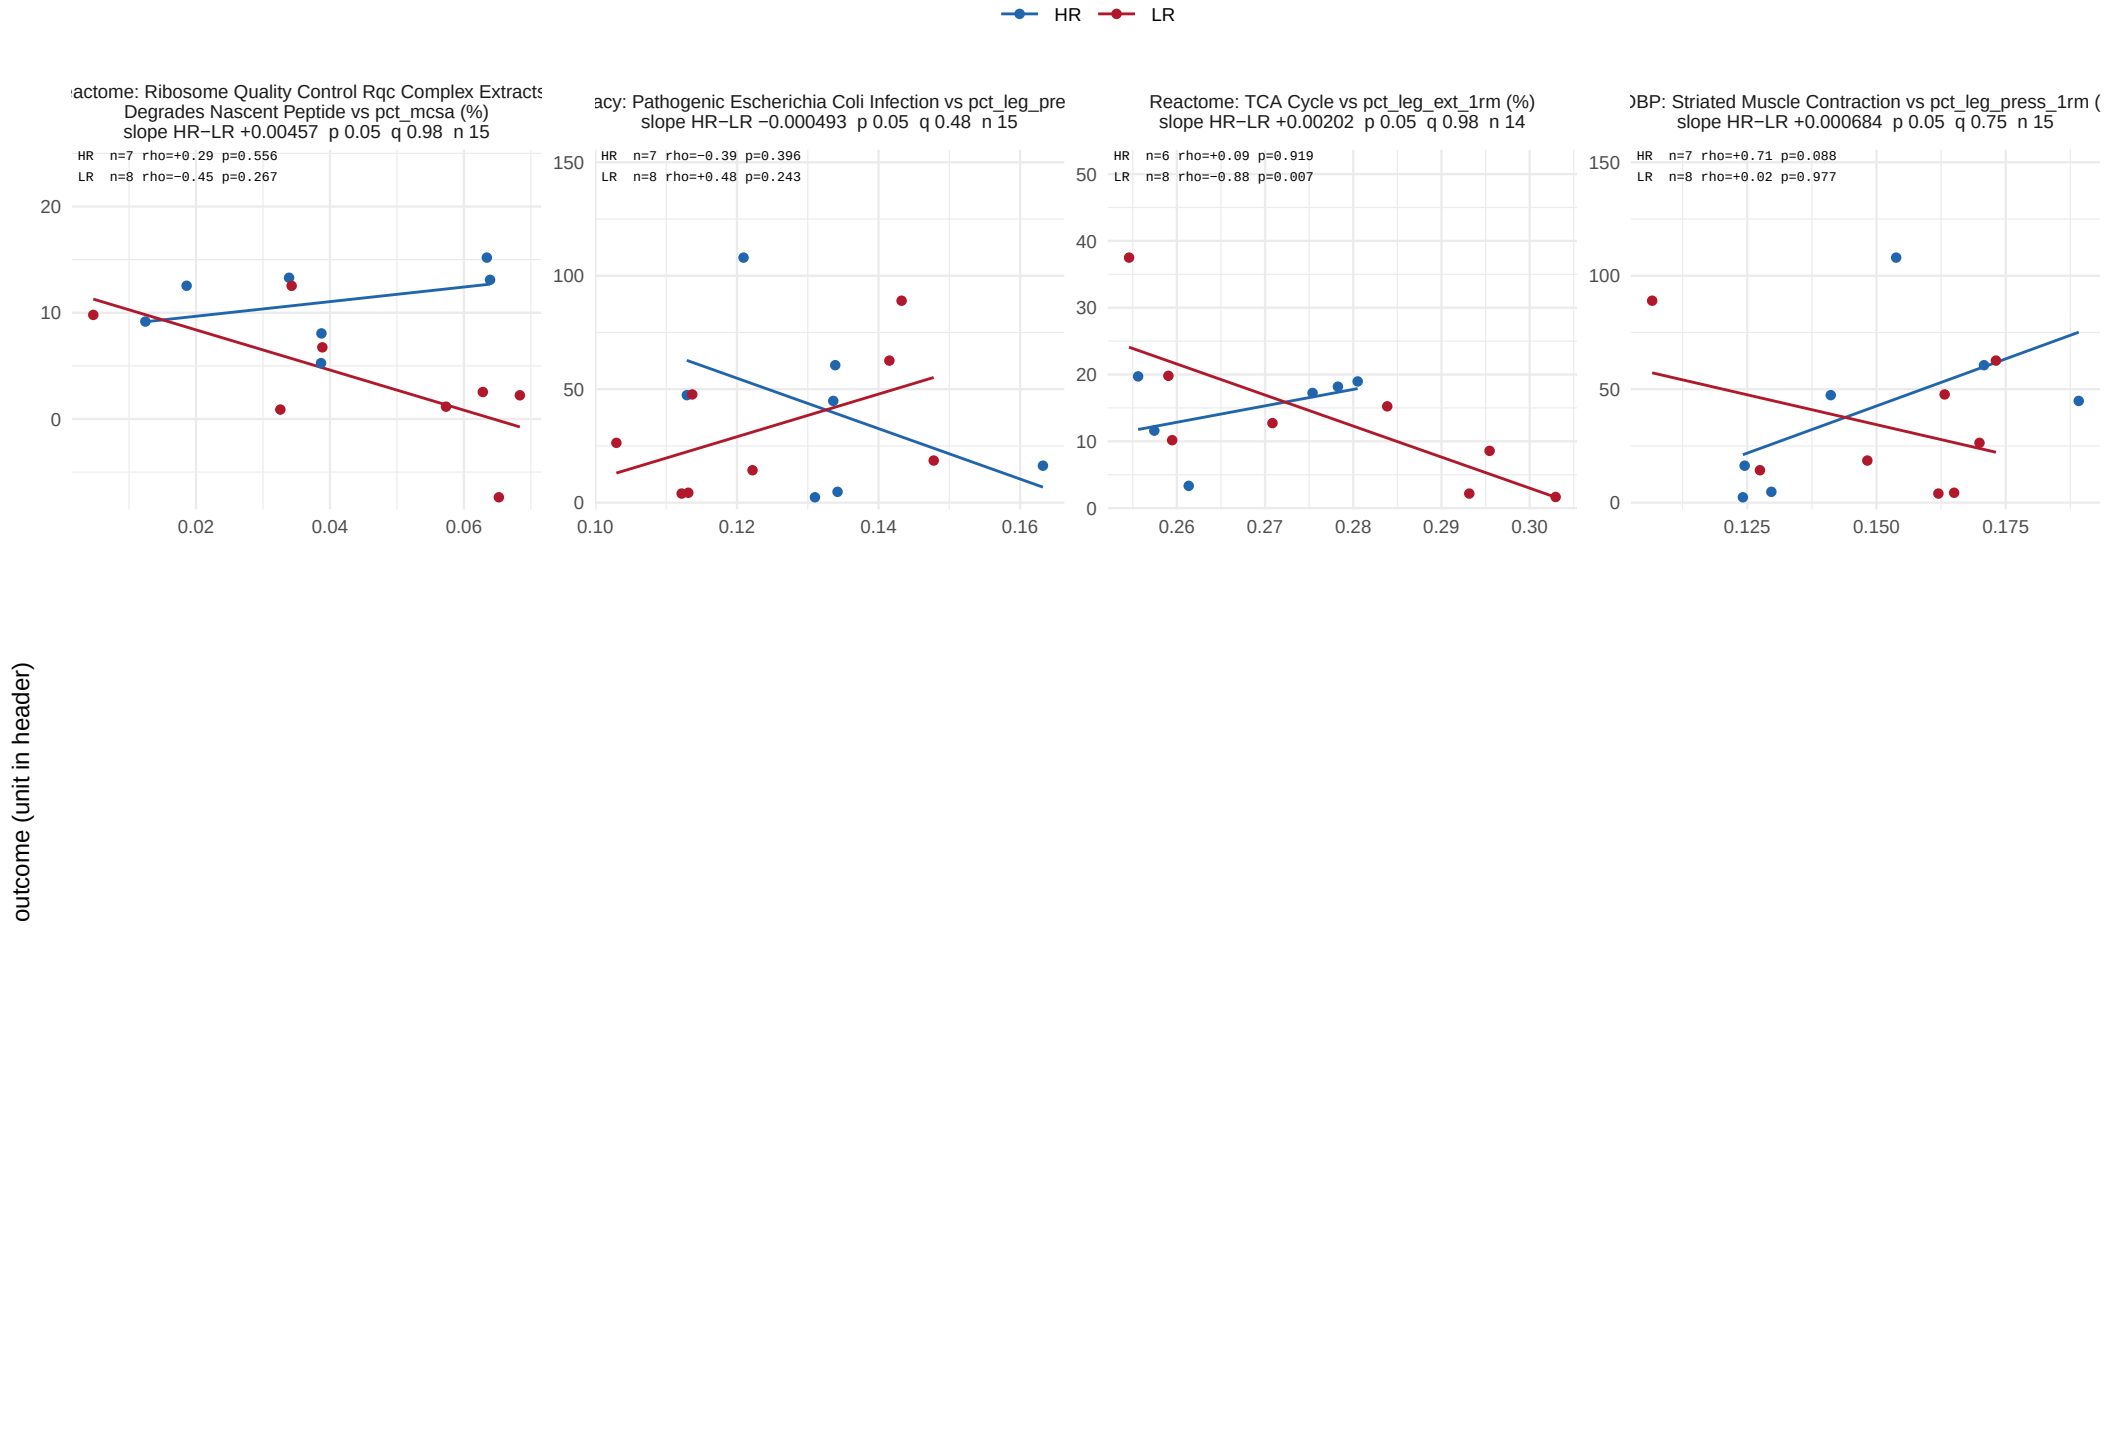

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, acute window


398 of 9646 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 1 of 34.

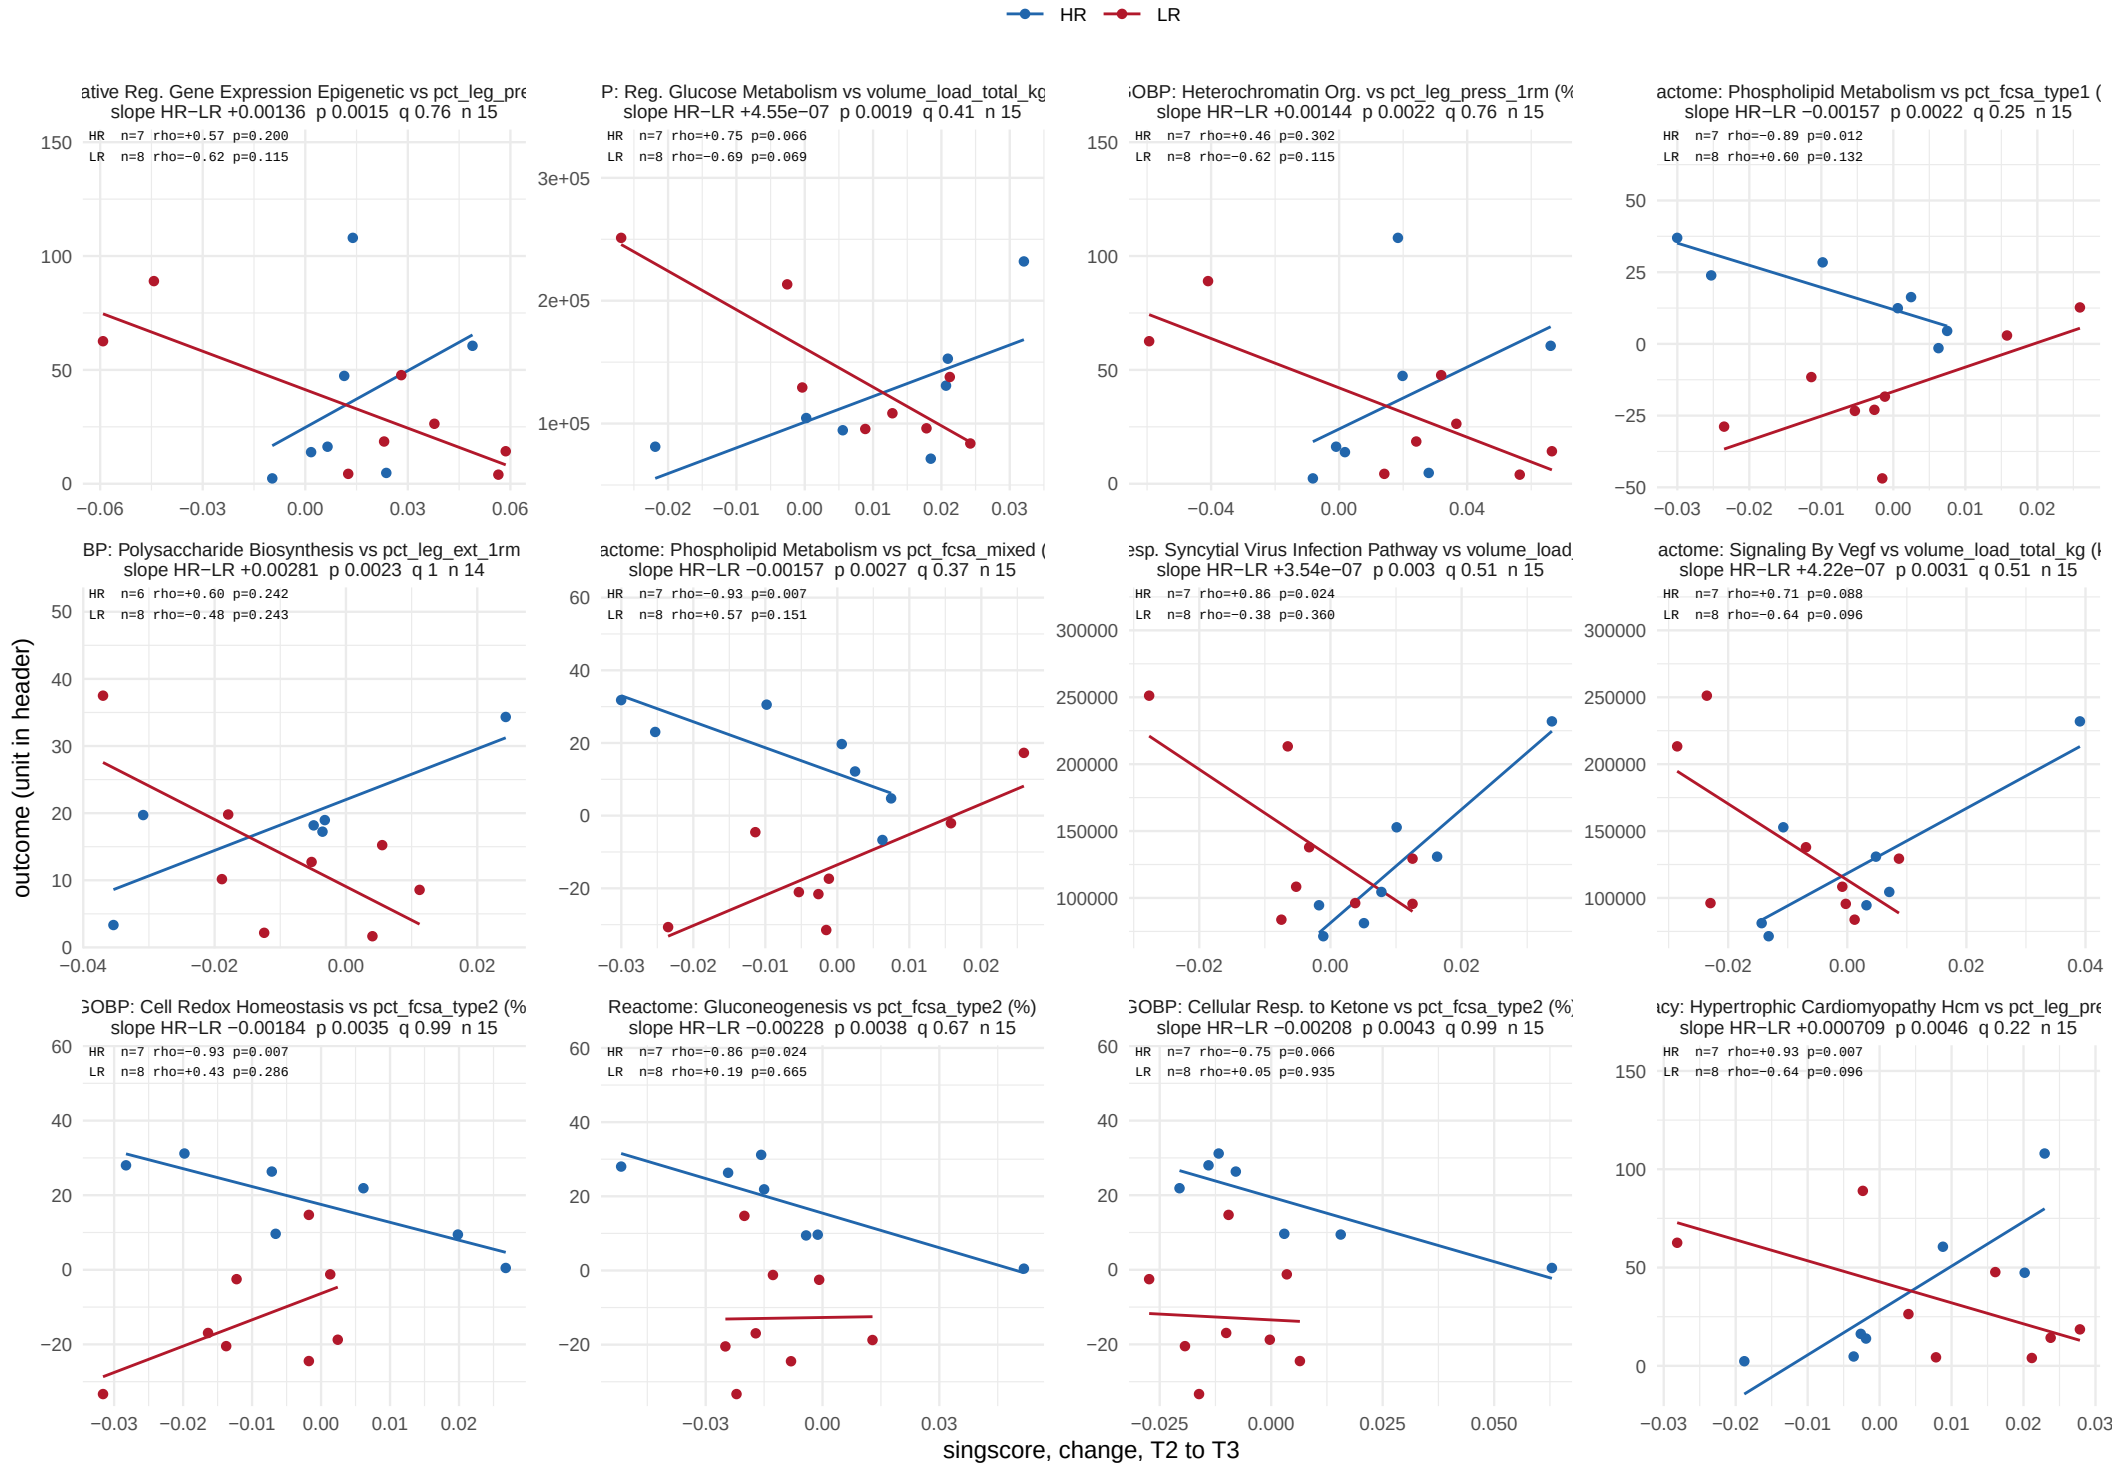

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, acute window


398 of 9646 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 2 of 34.

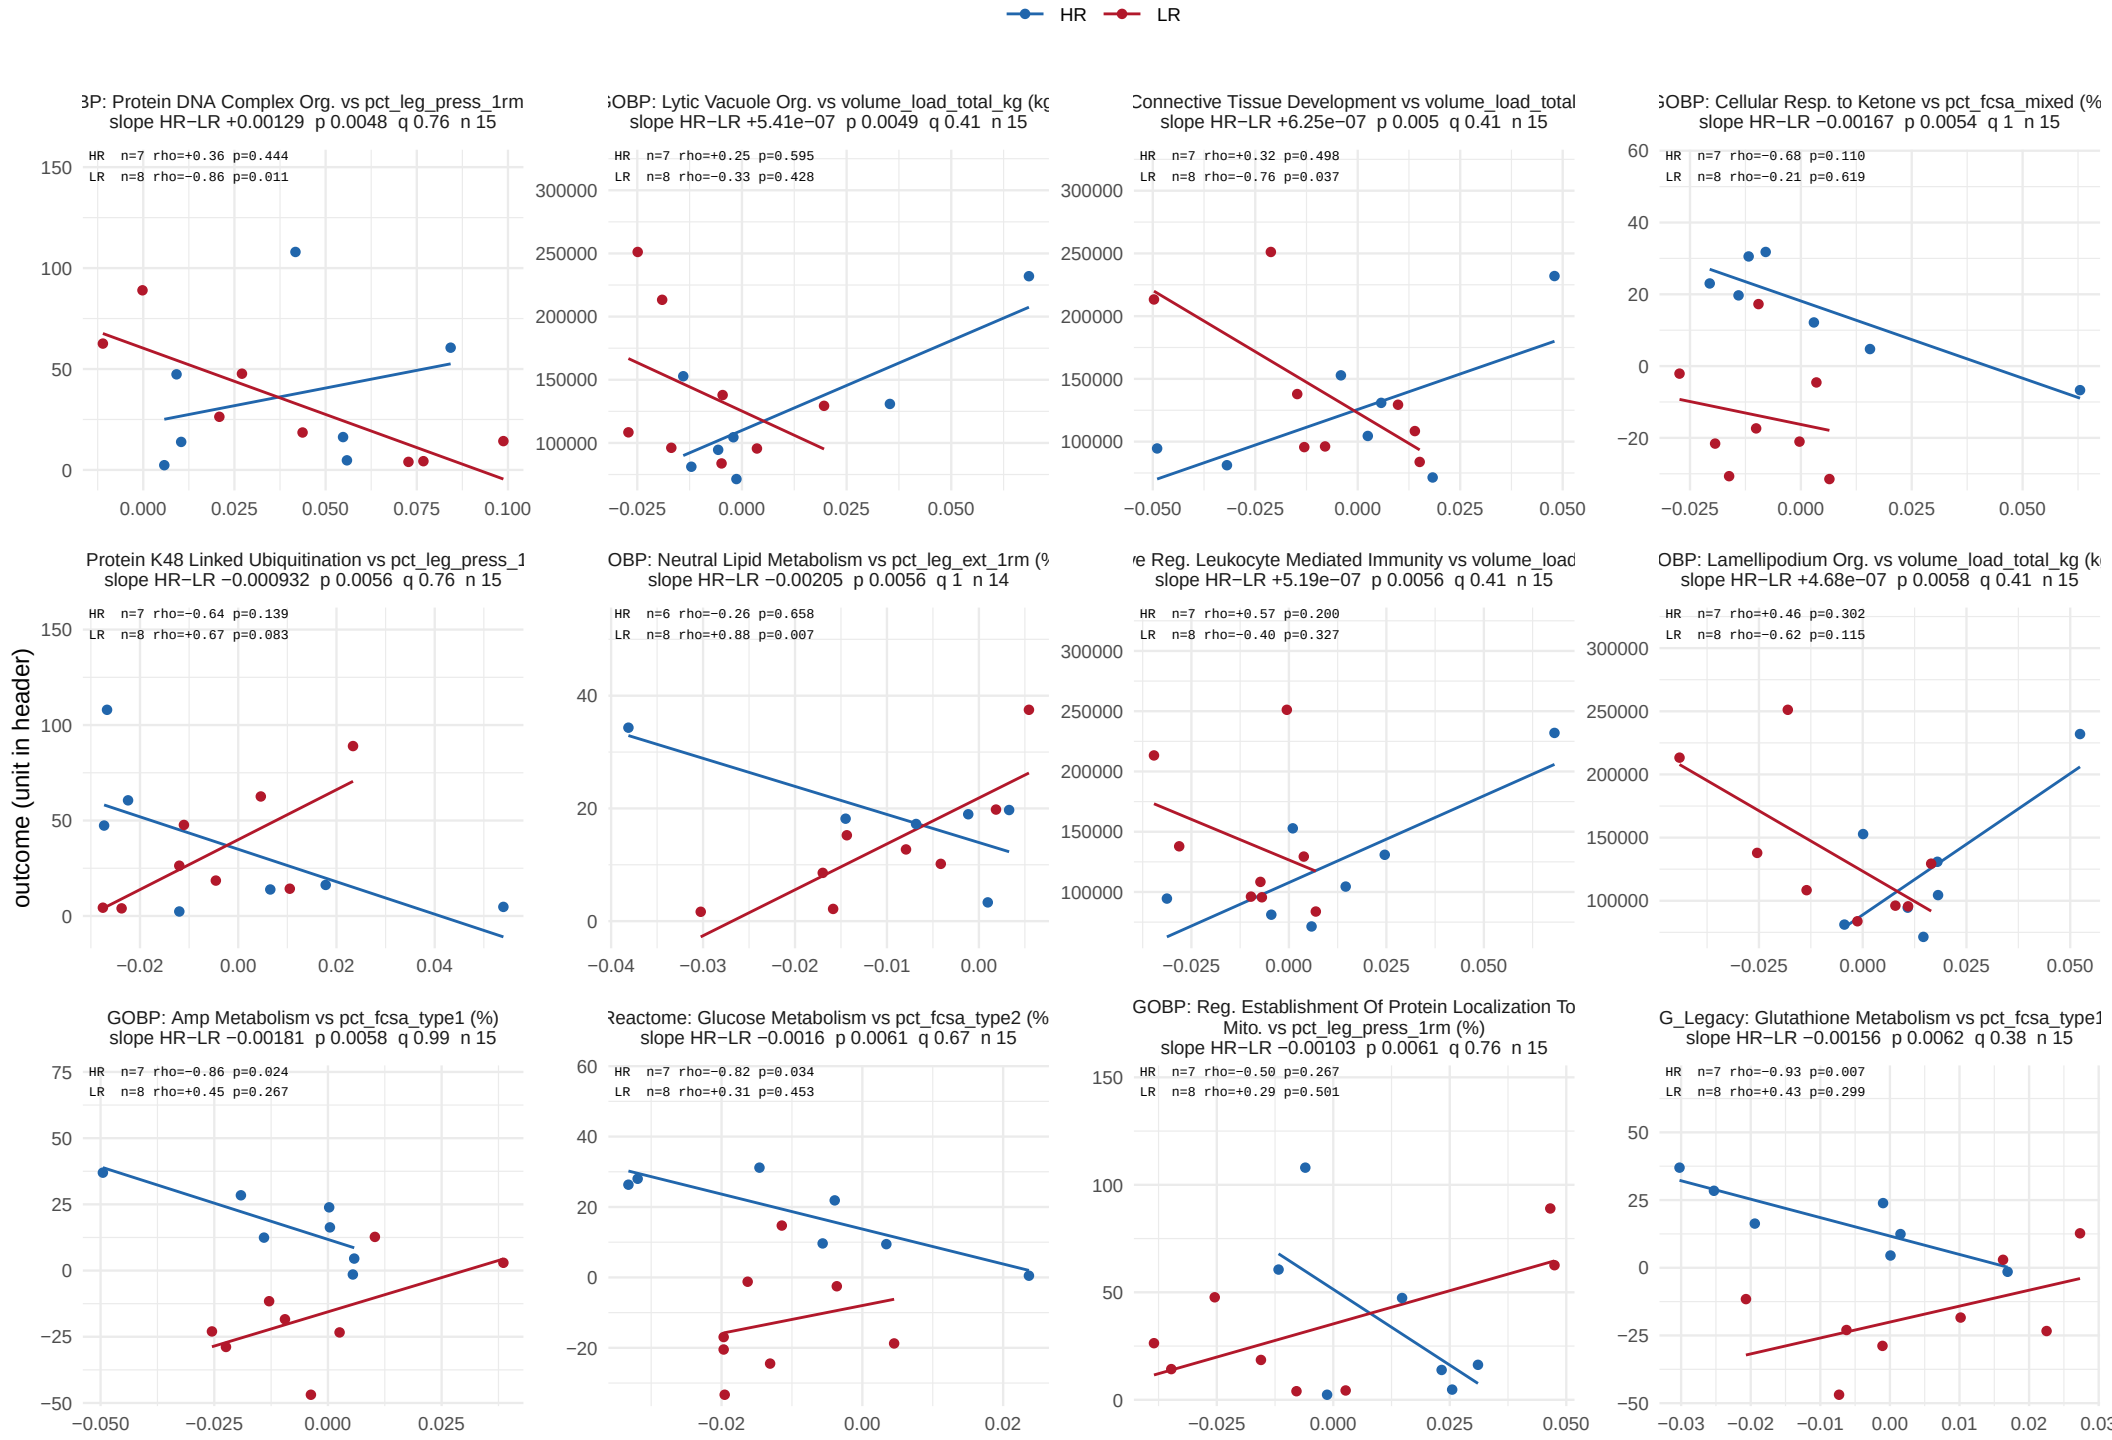

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, acute window


398 of 9646 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 3 of 34.

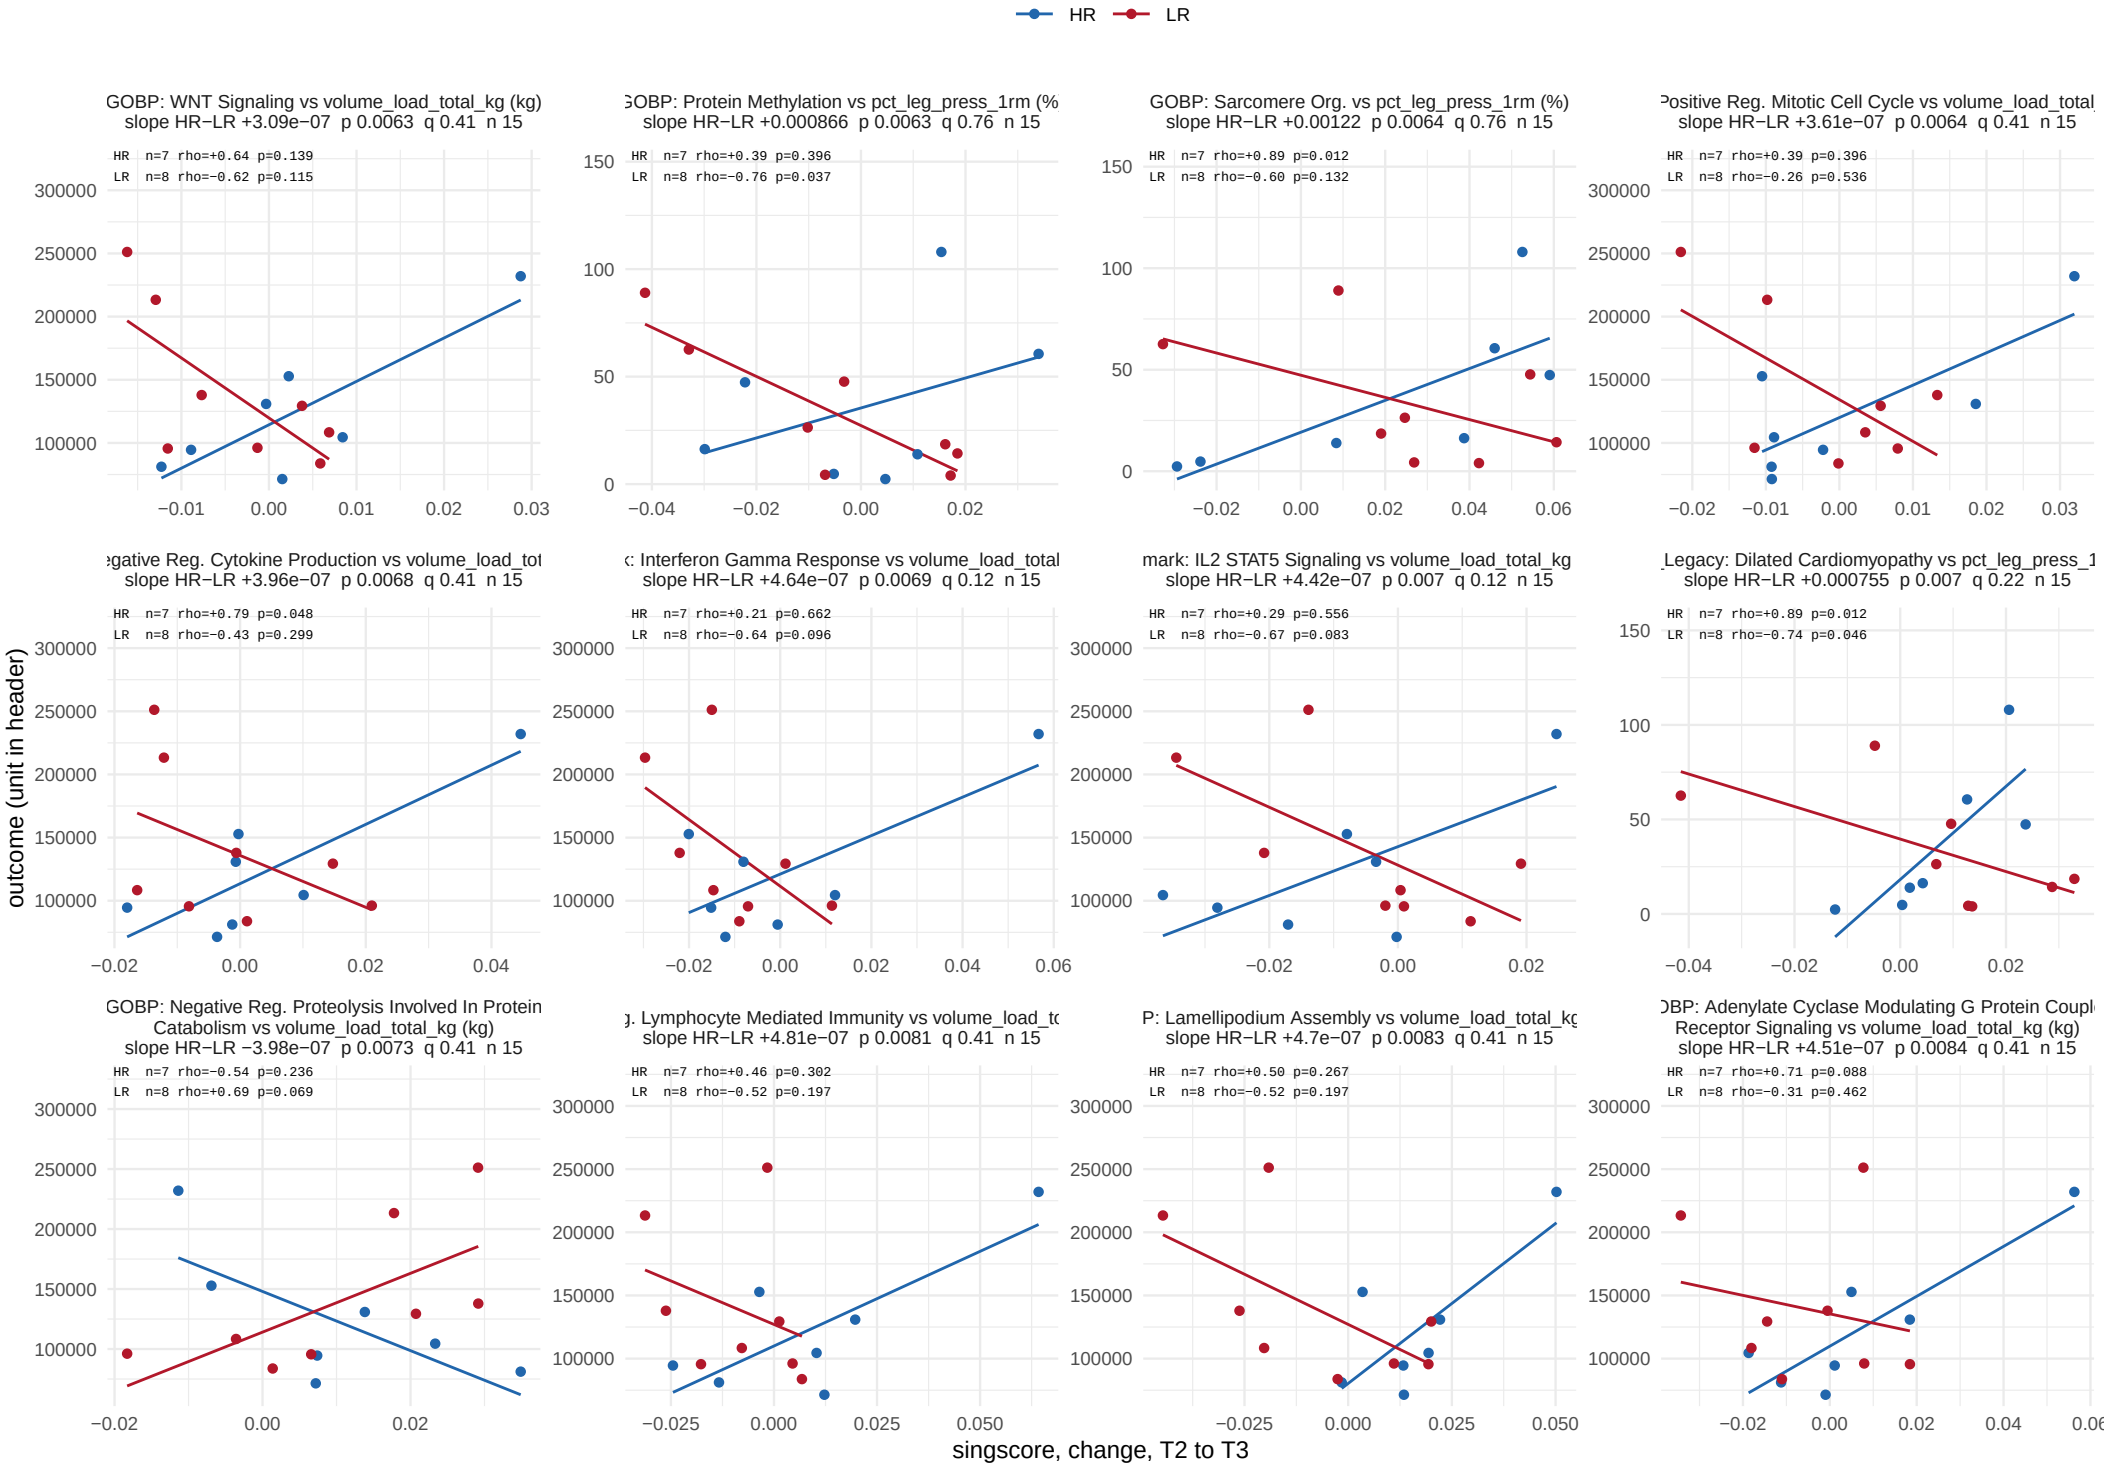

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, acute window


398 of 9646 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 4 of 34.

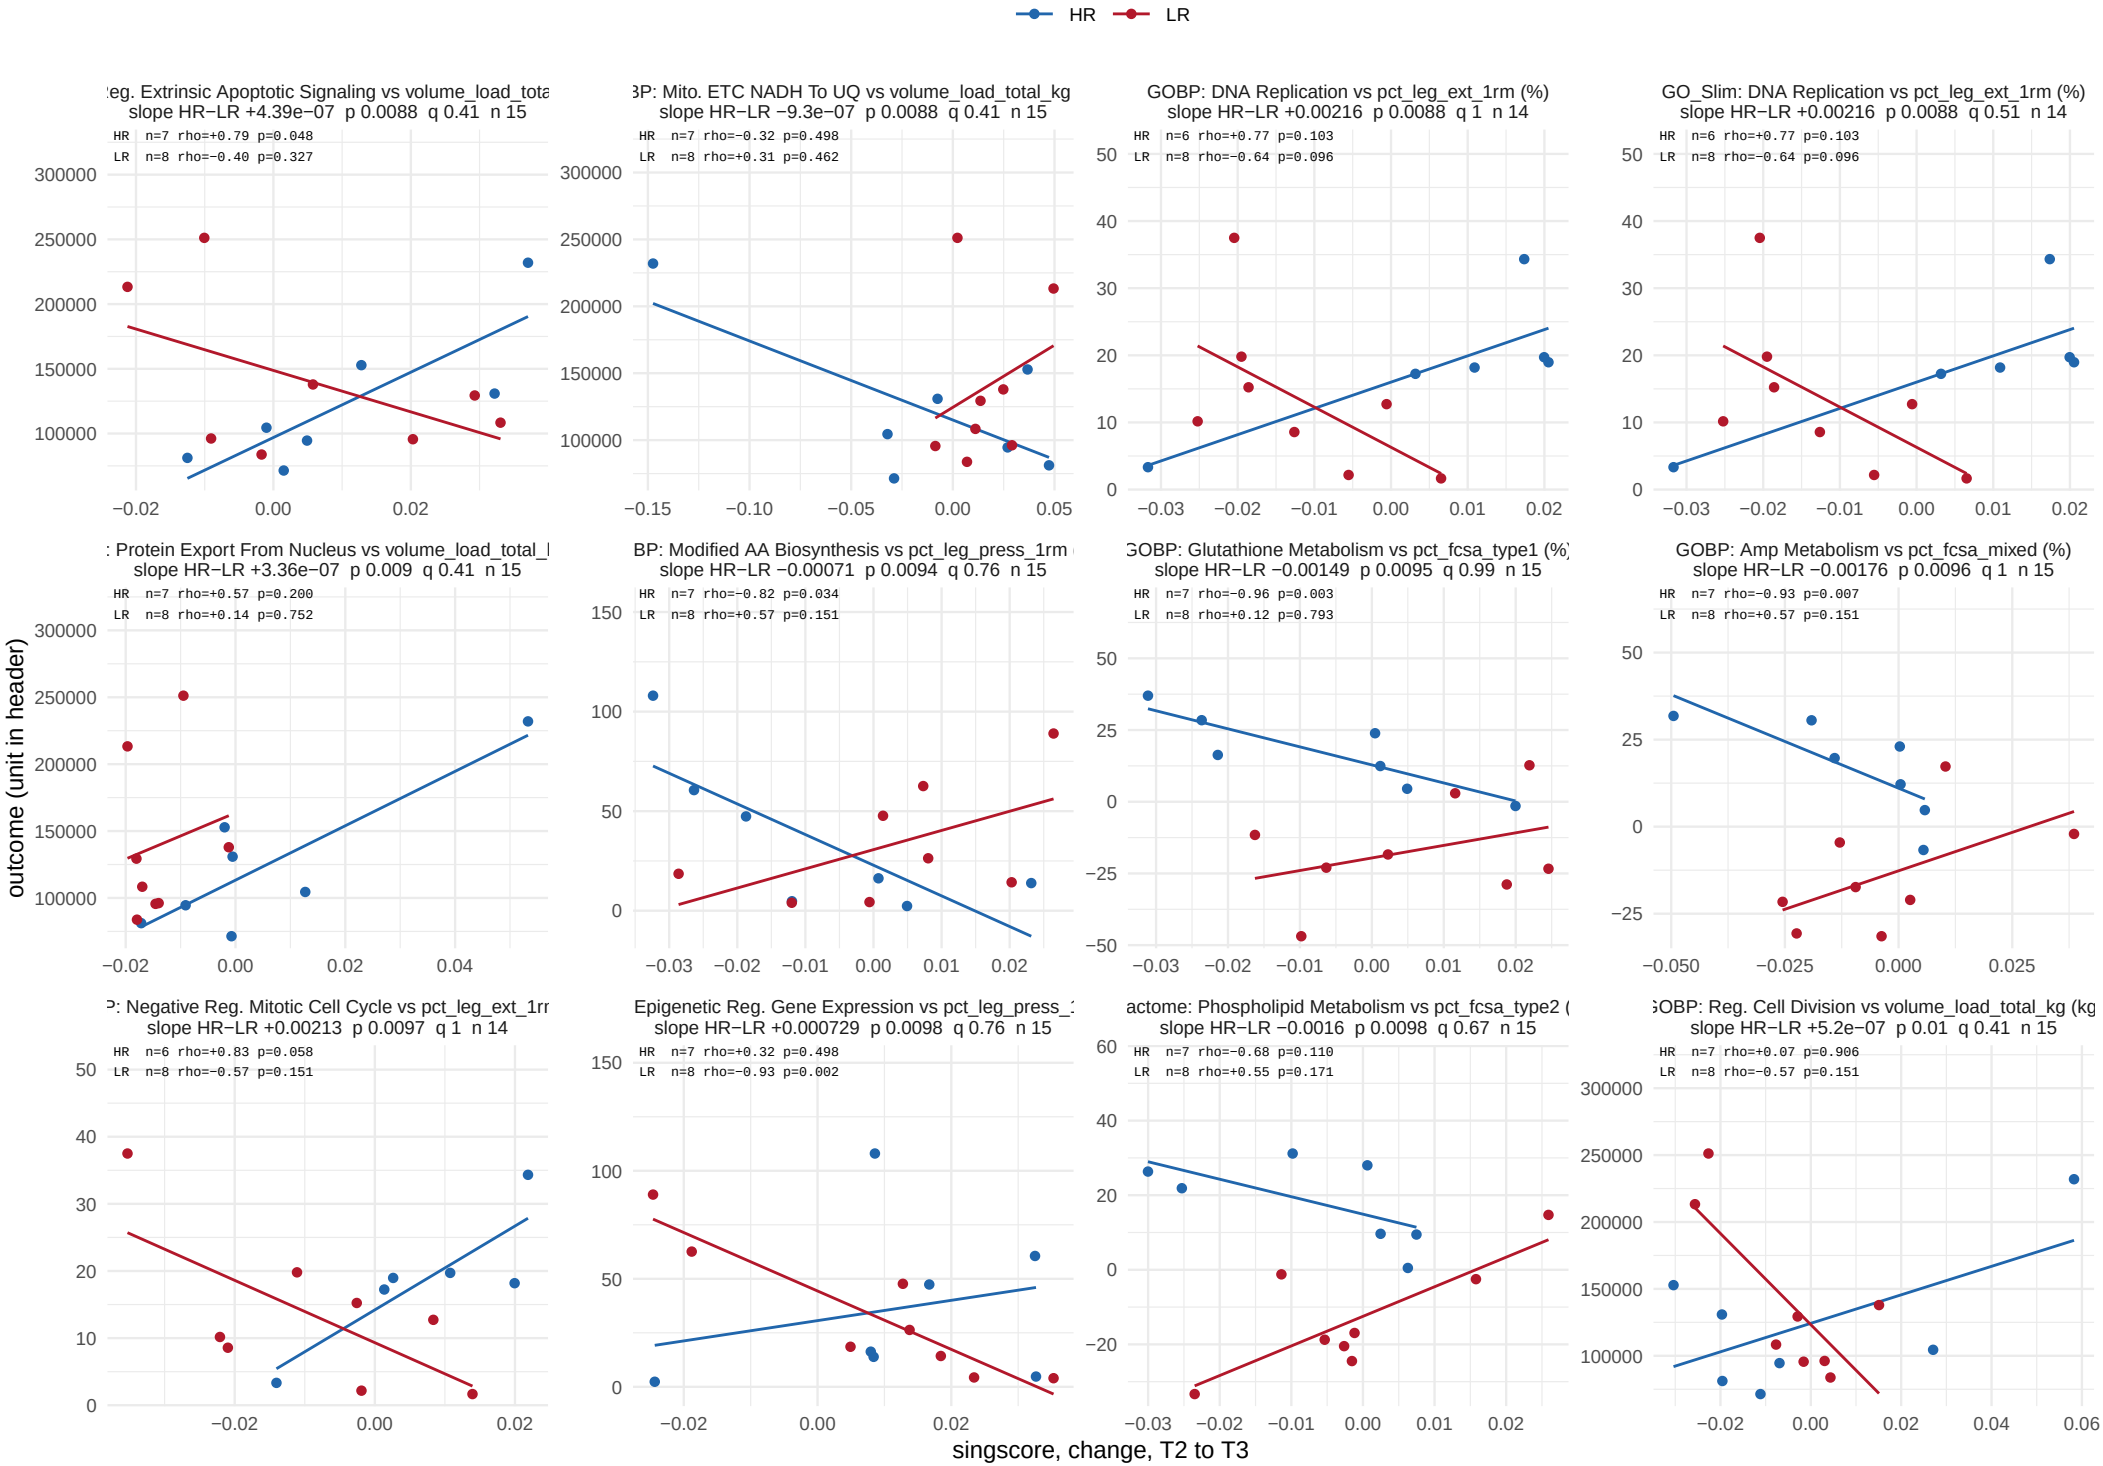

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, acute window


398 of 9646 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 5 of 34.

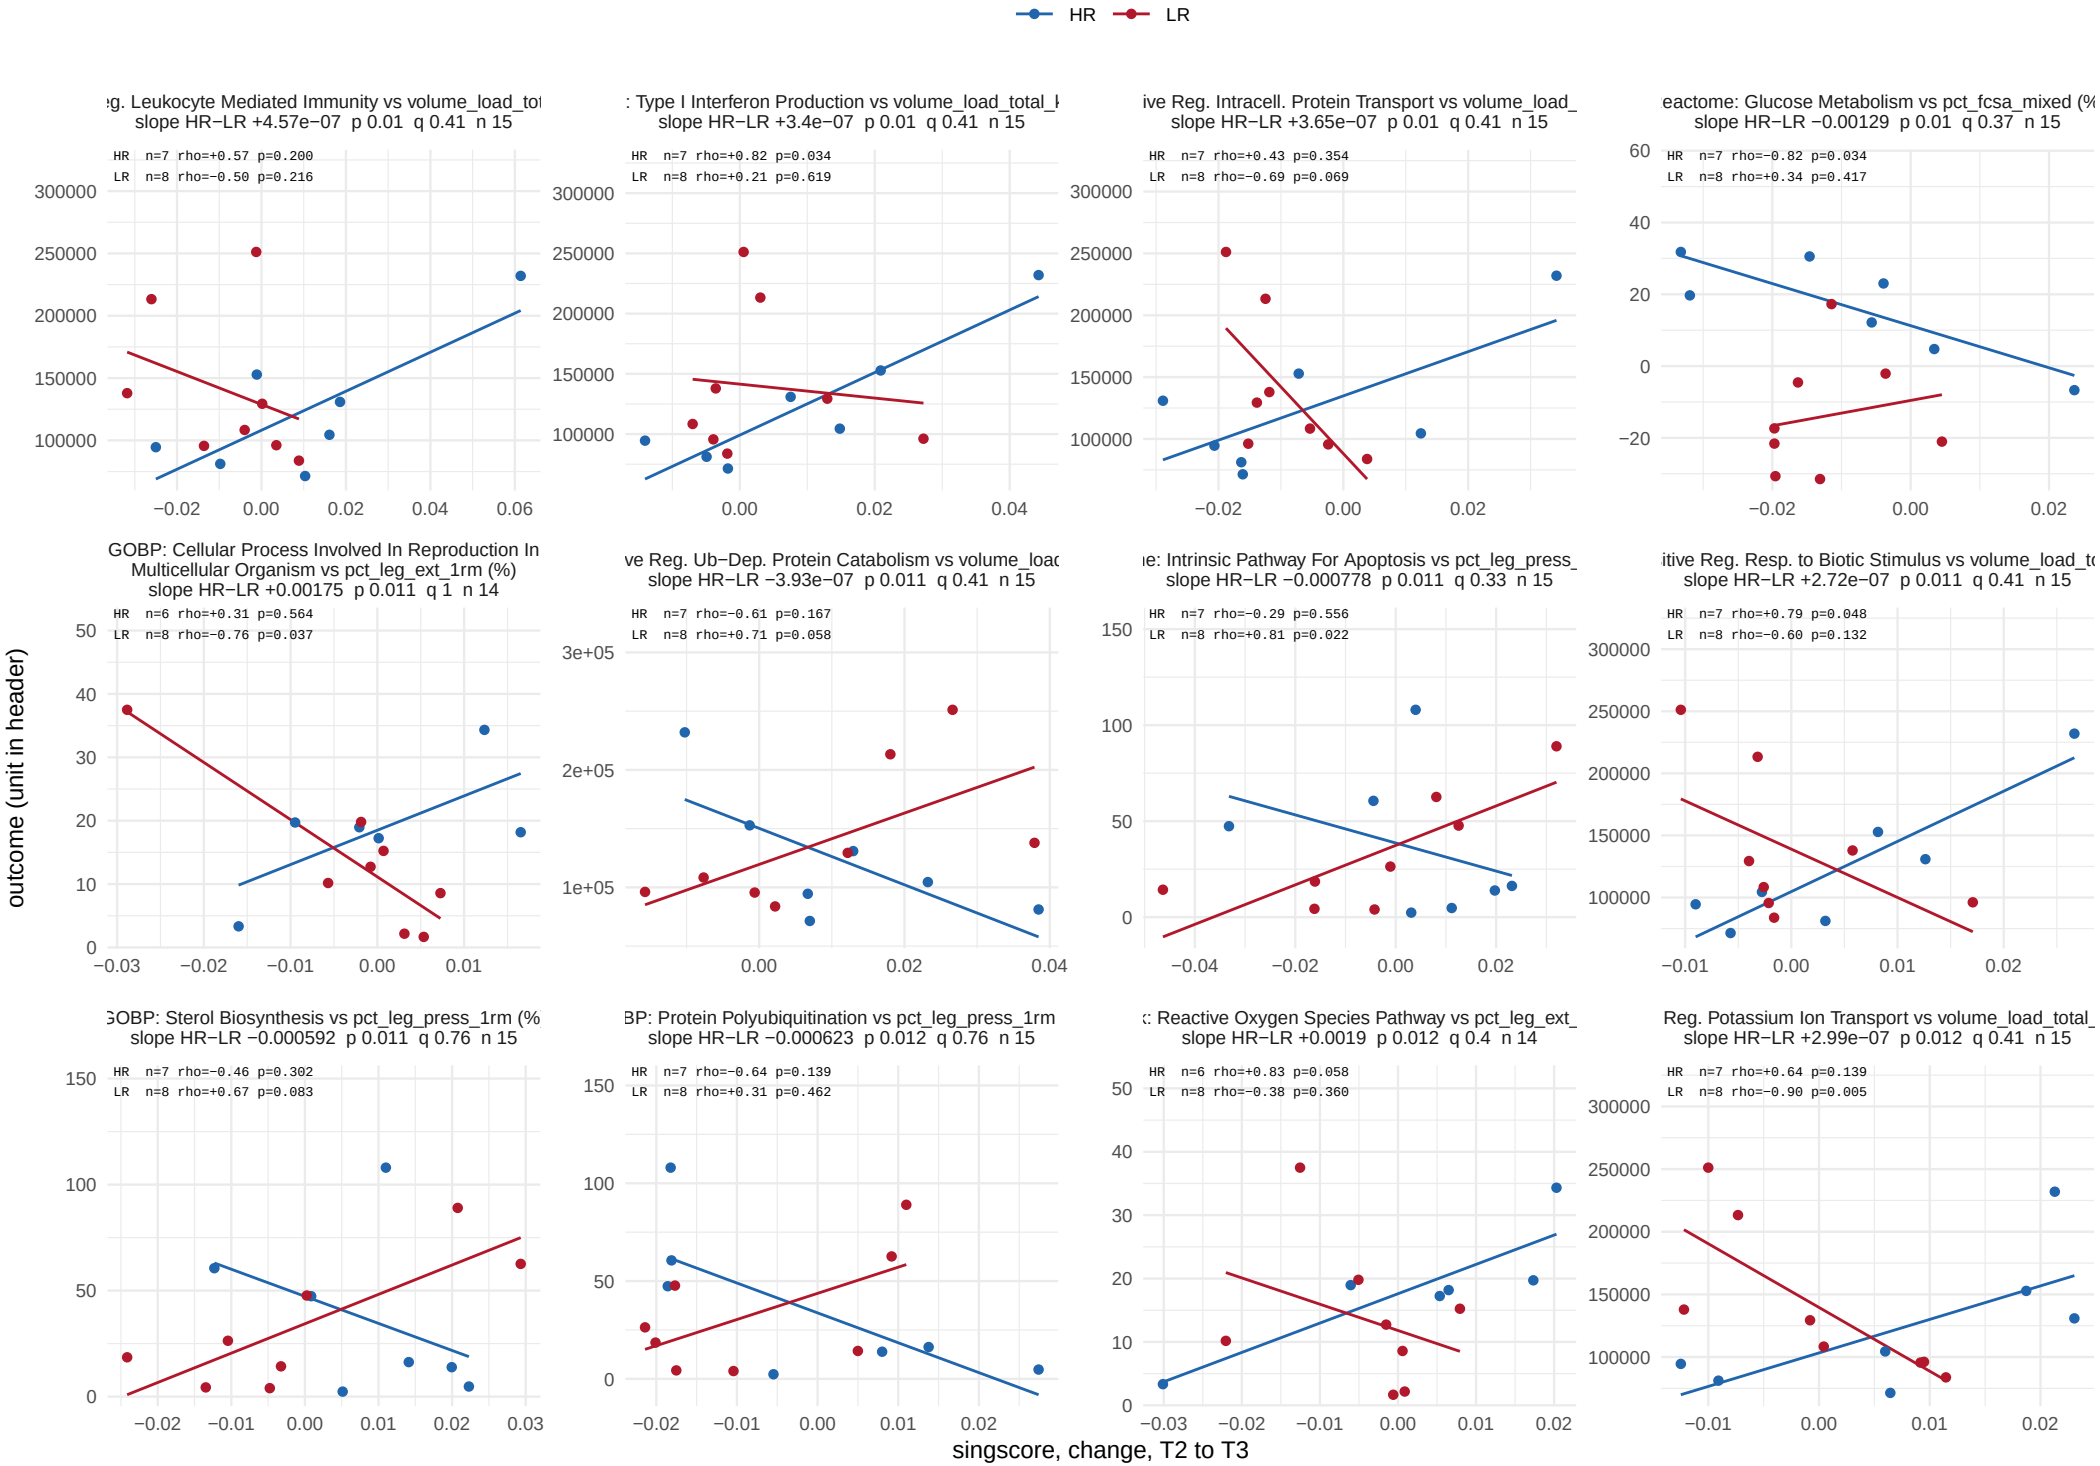

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, acute window


398 of 9646 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 6 of 34.

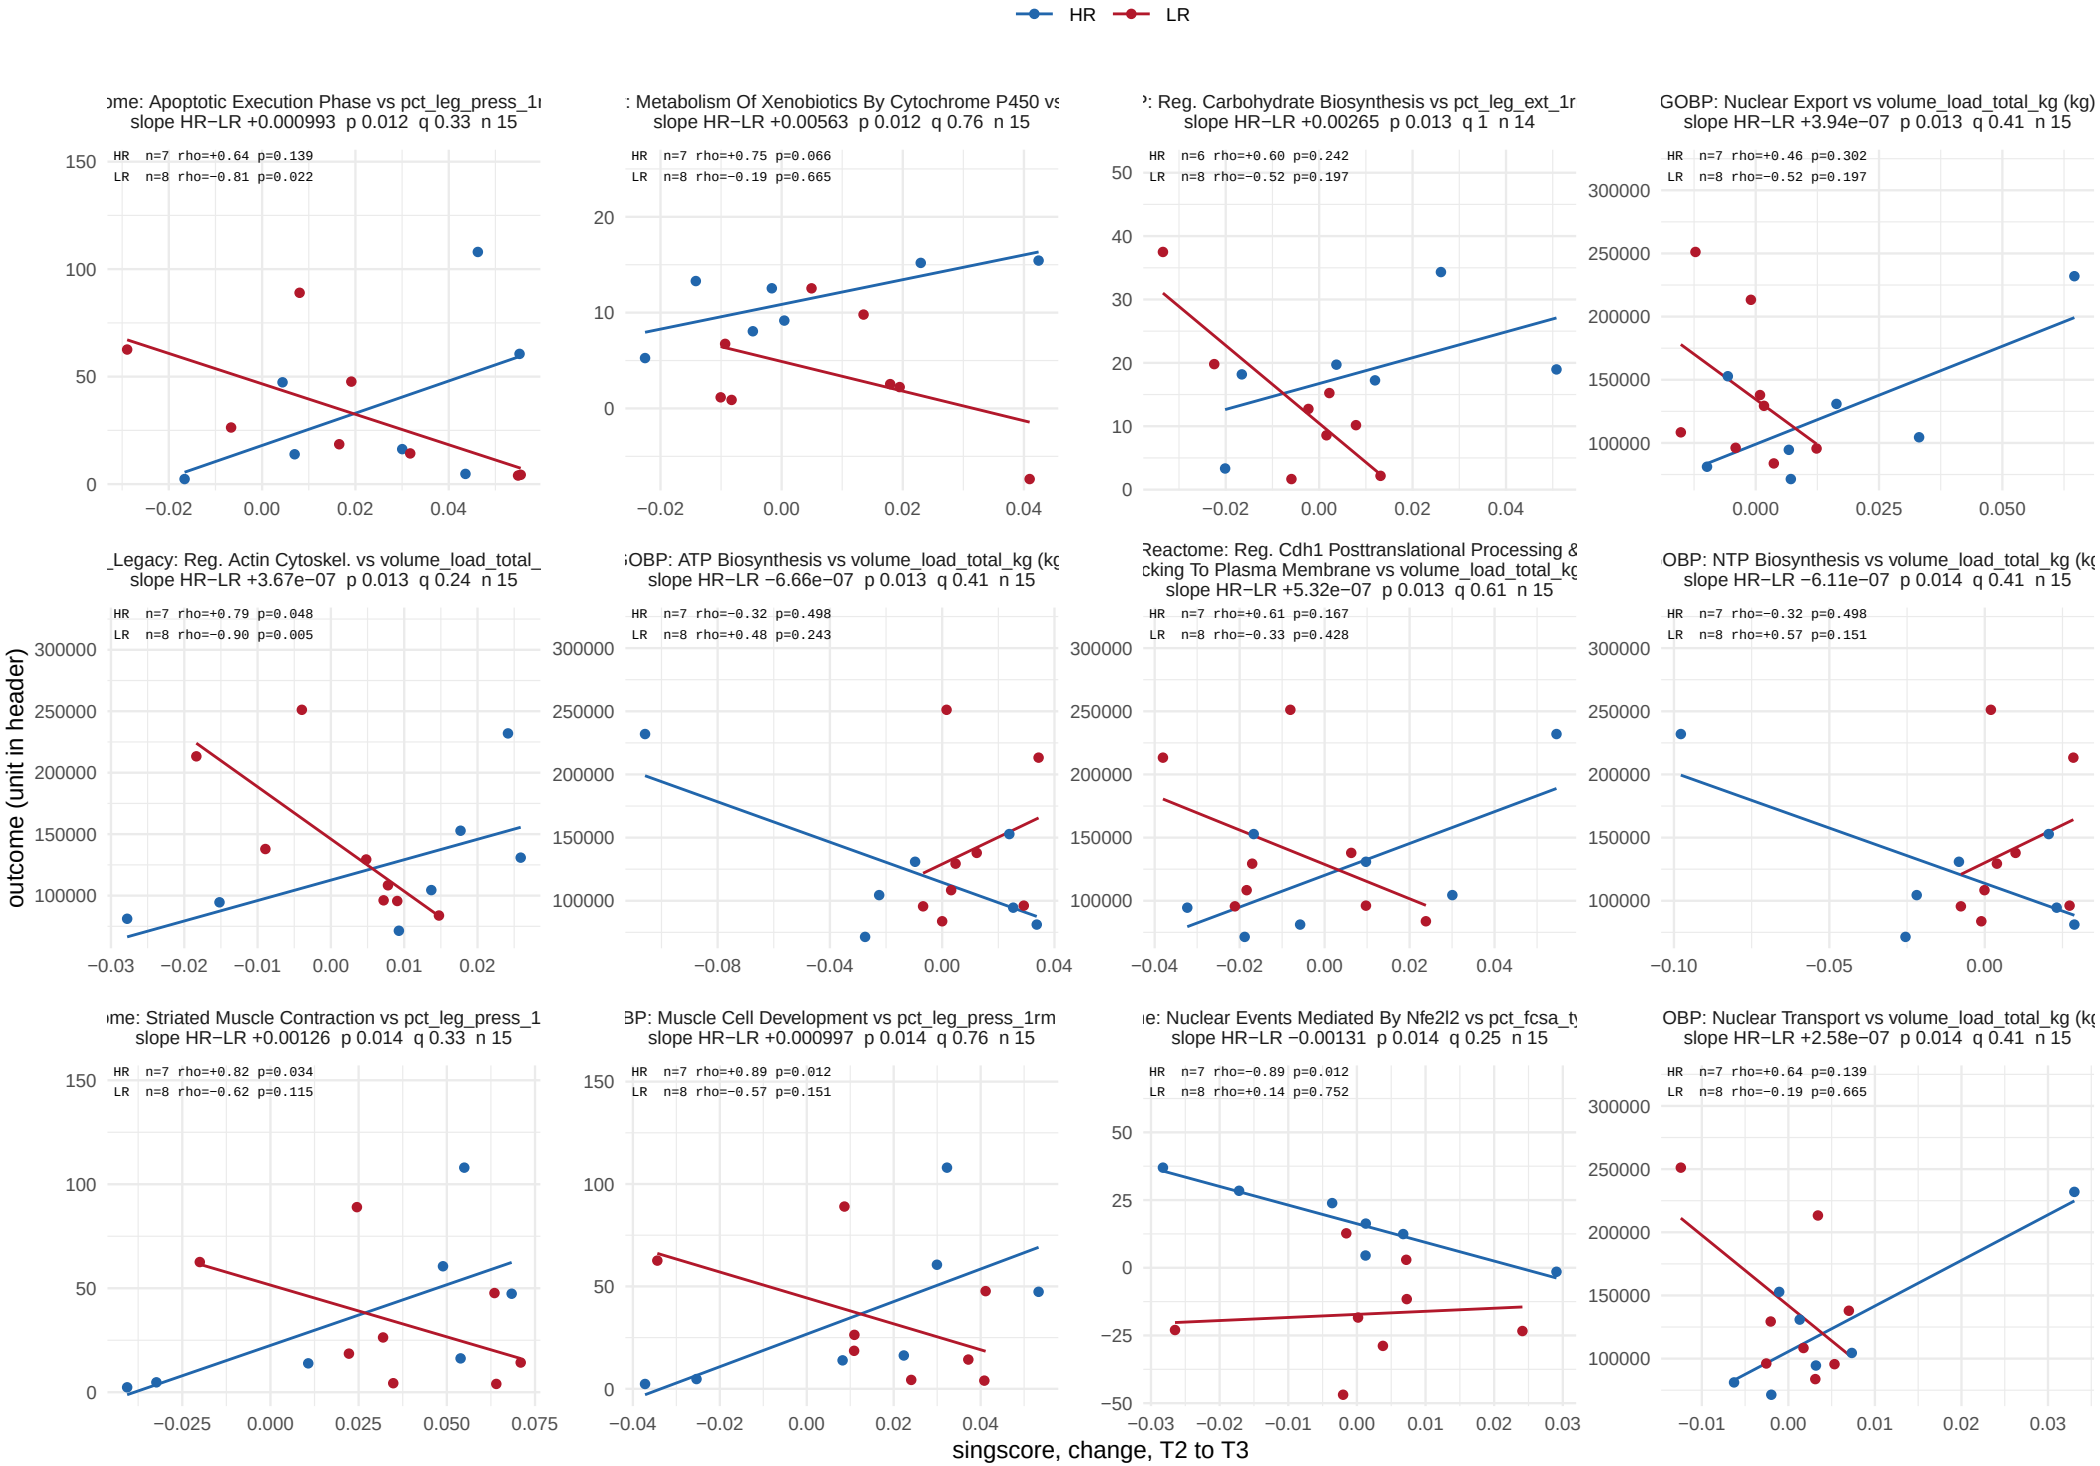

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, acute window


398 of 9646 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 7 of 34.

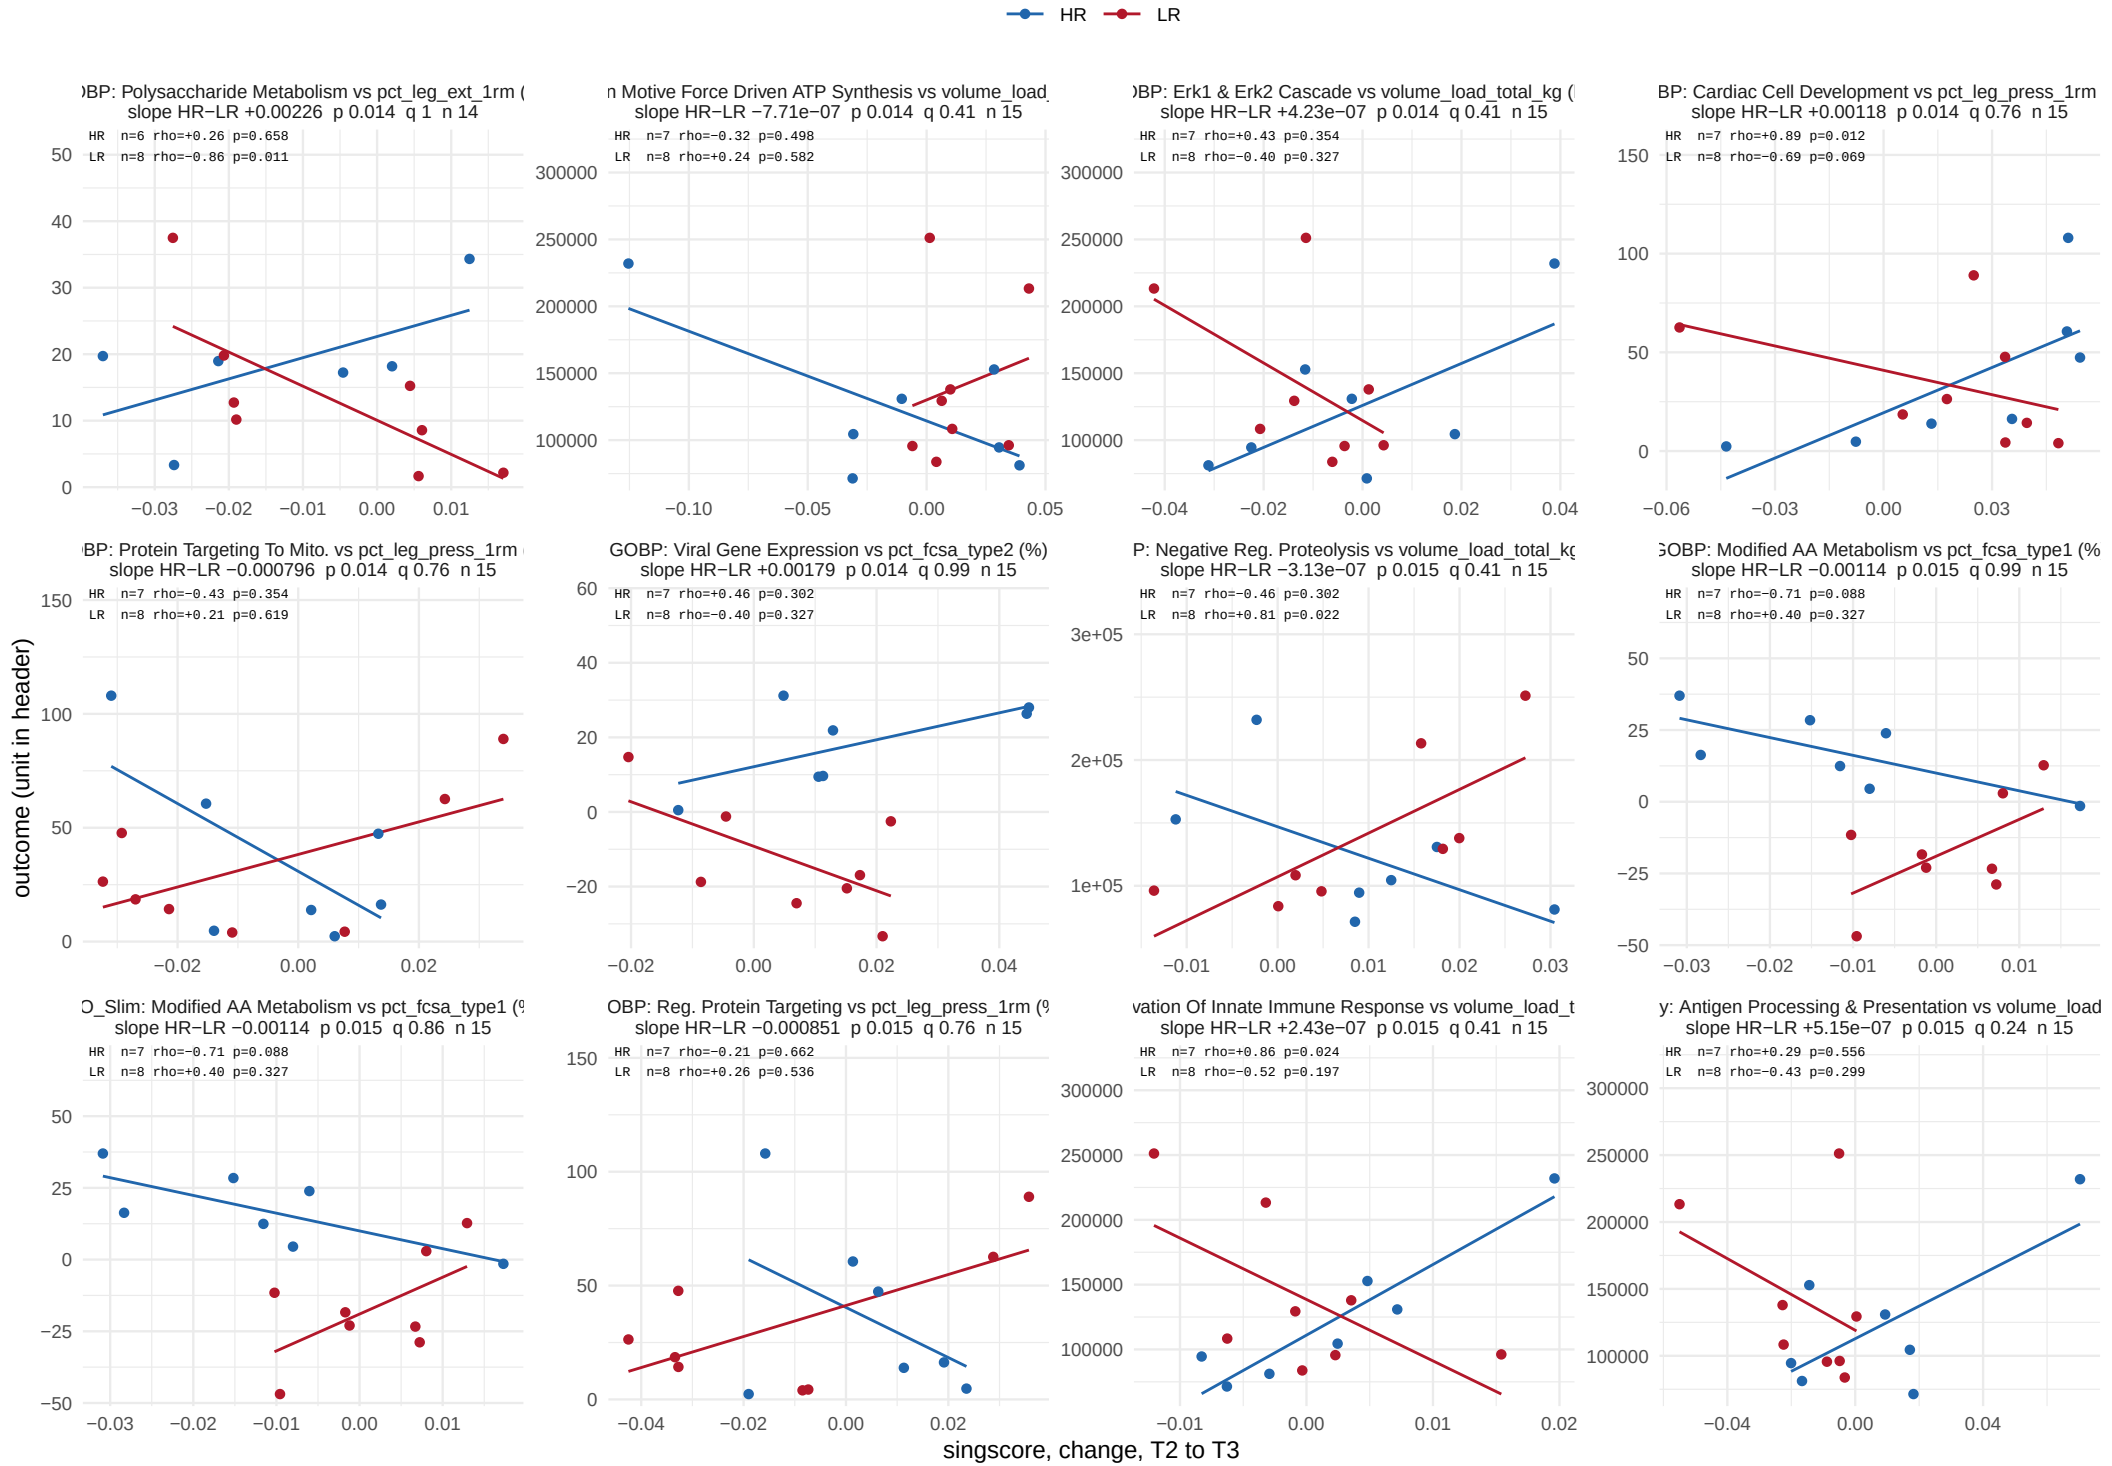

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, acute window


398 of 9646 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 8 of 34.

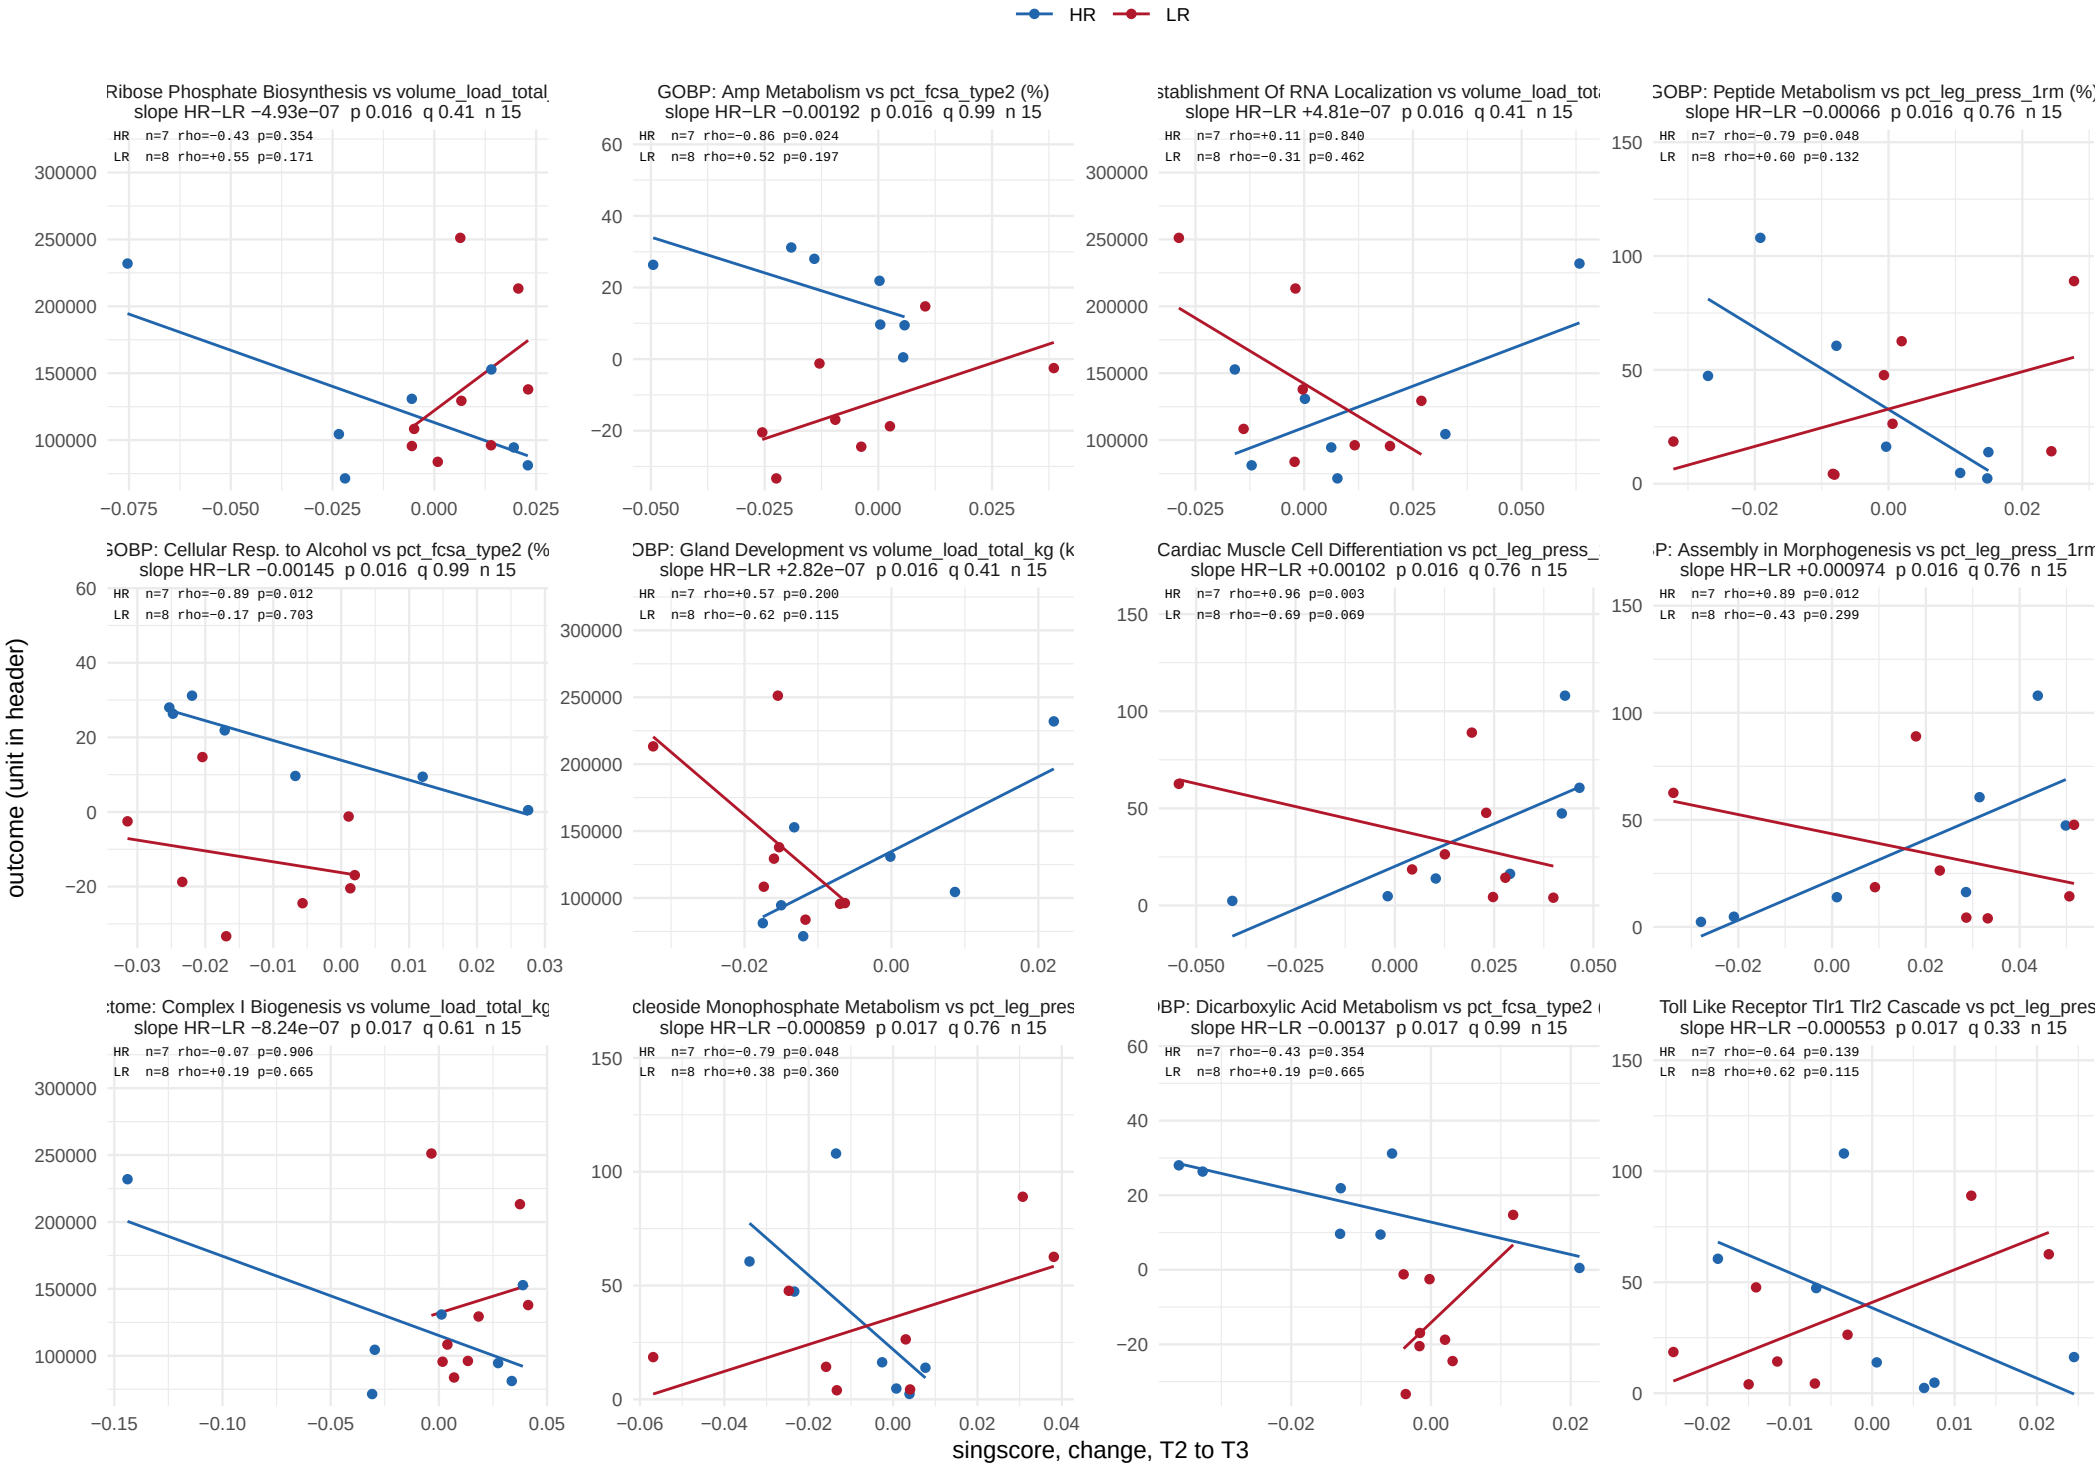

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, acute window


398 of 9646 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 9 of 34.

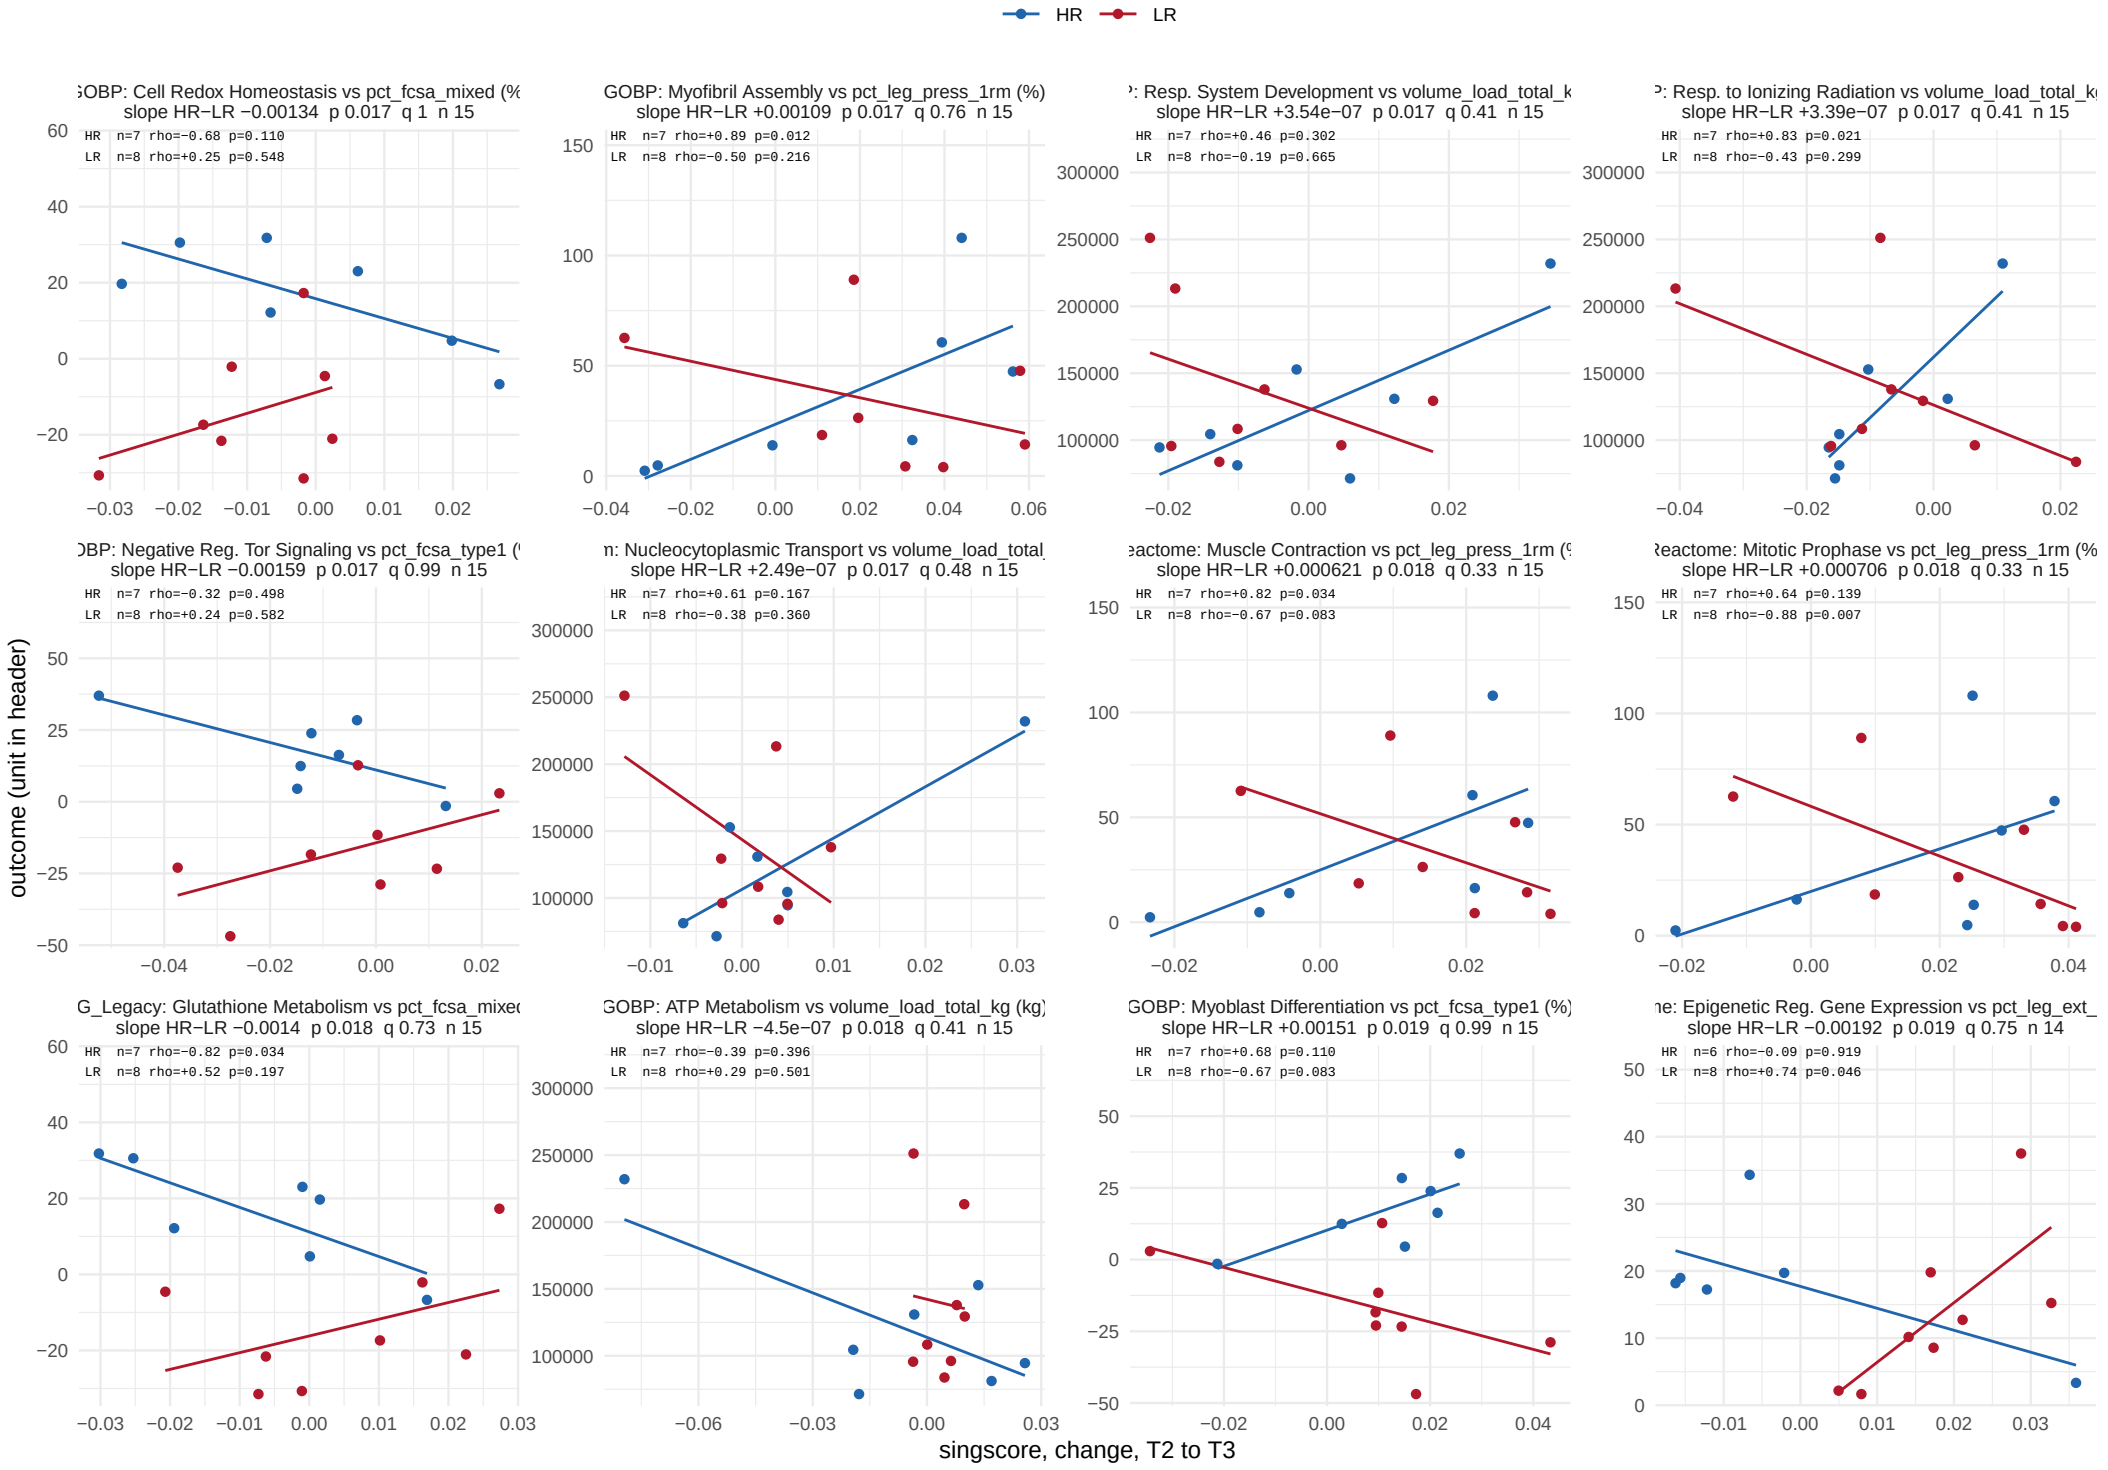

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, acute window


398 of 9646 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 10 of 34.

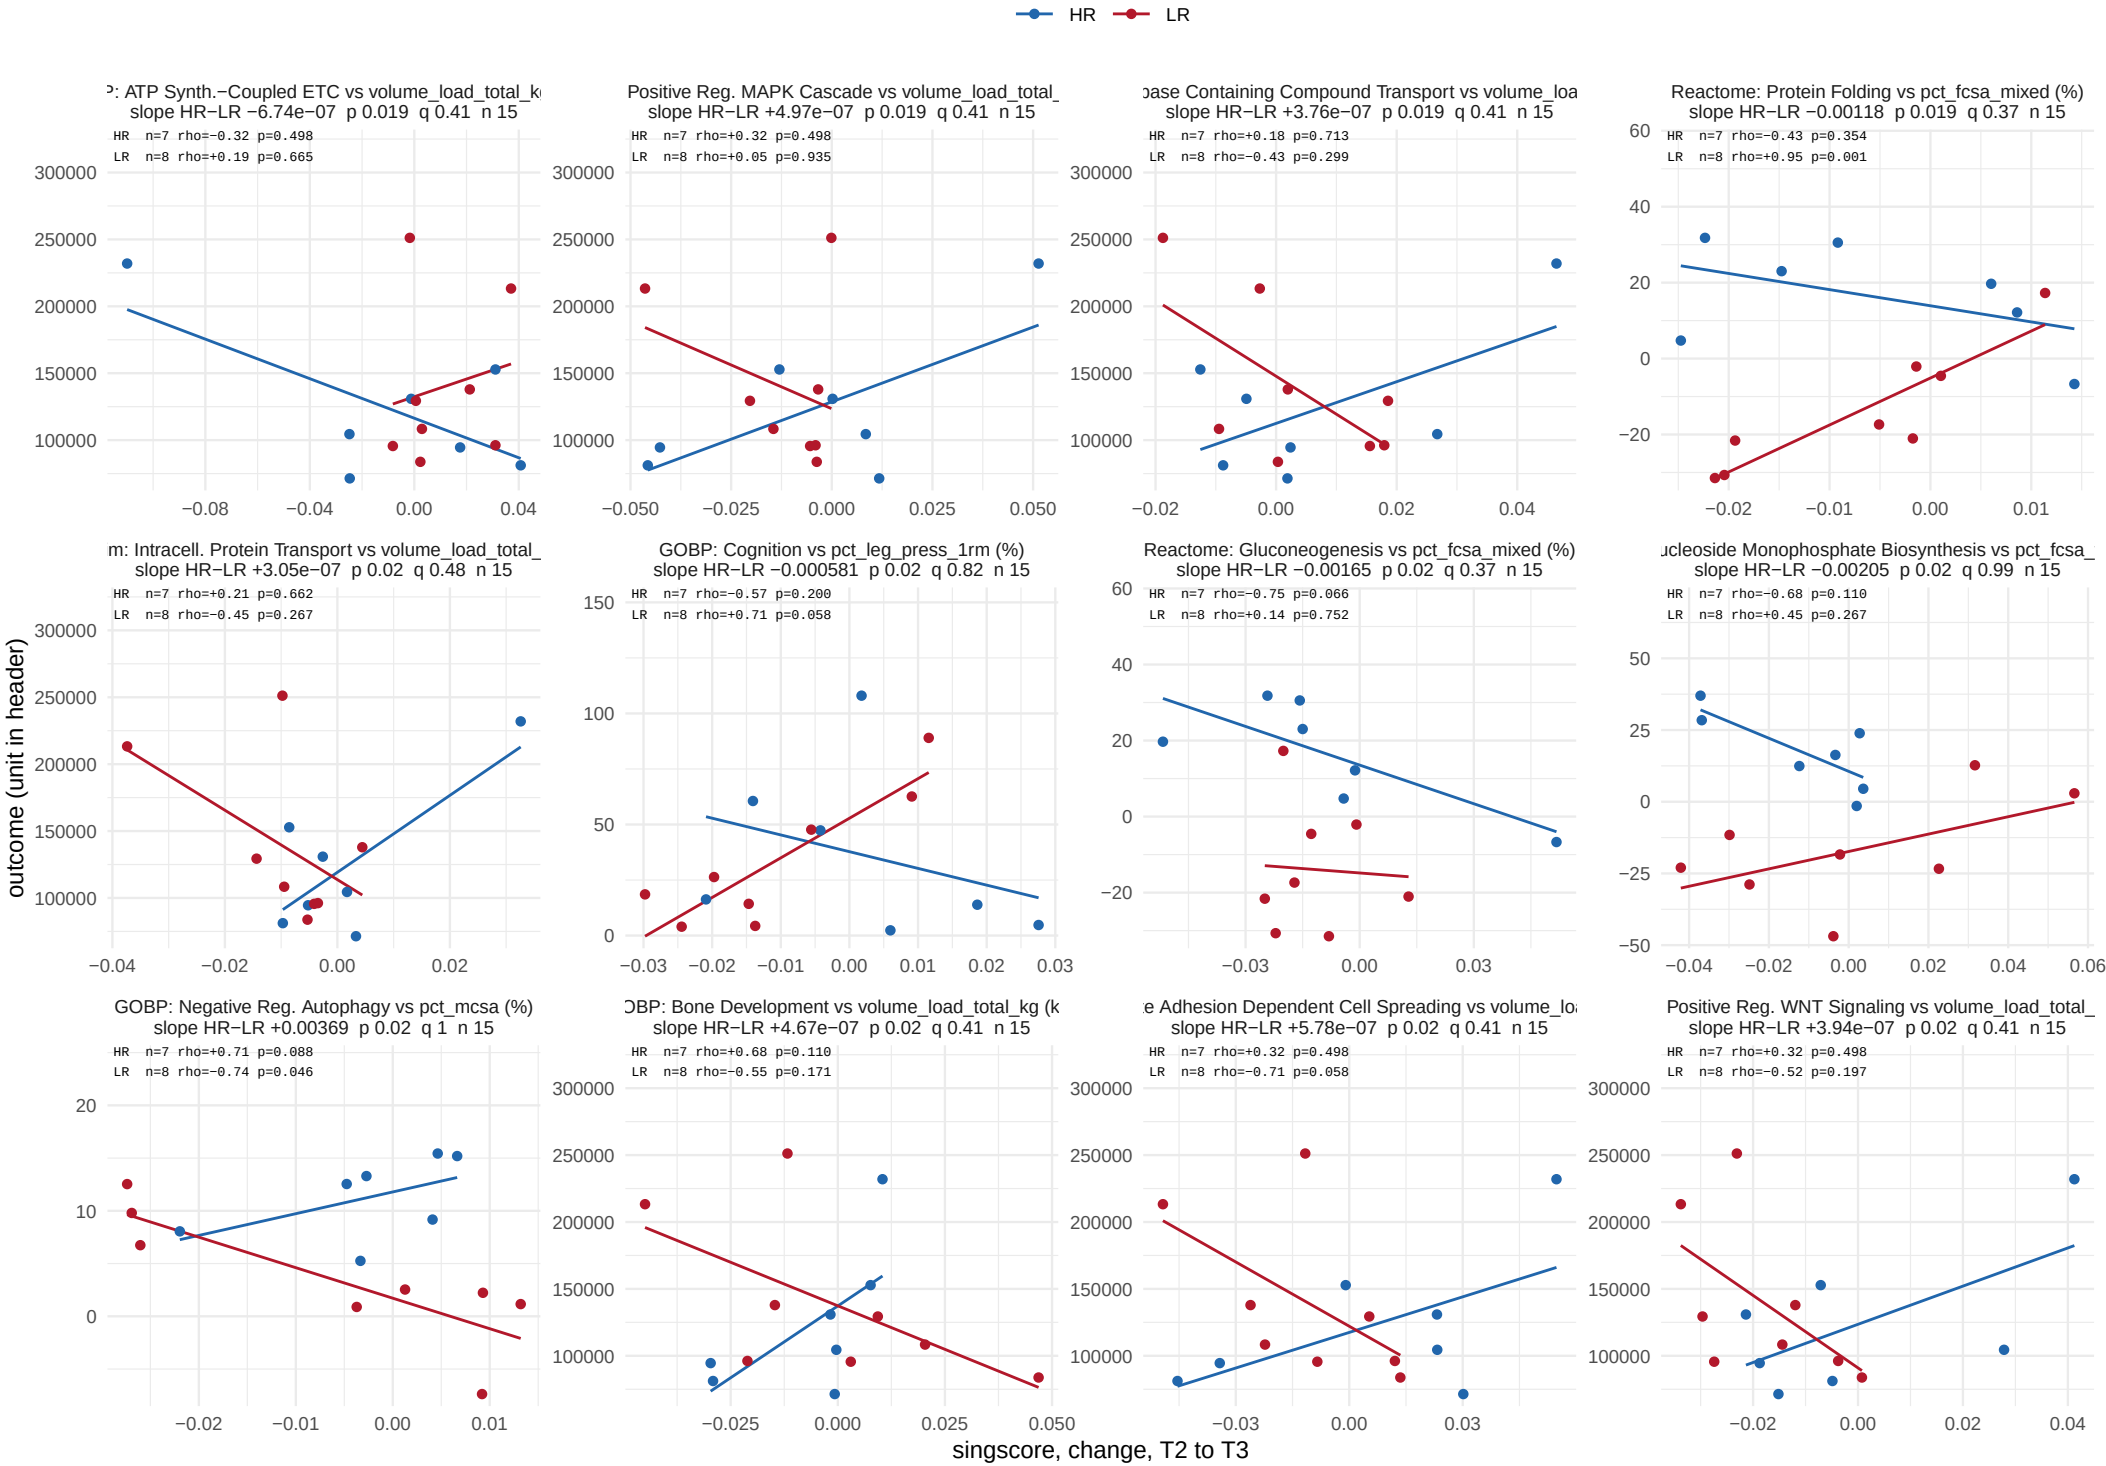

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, acute window


398 of 9646 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 11 of 34.

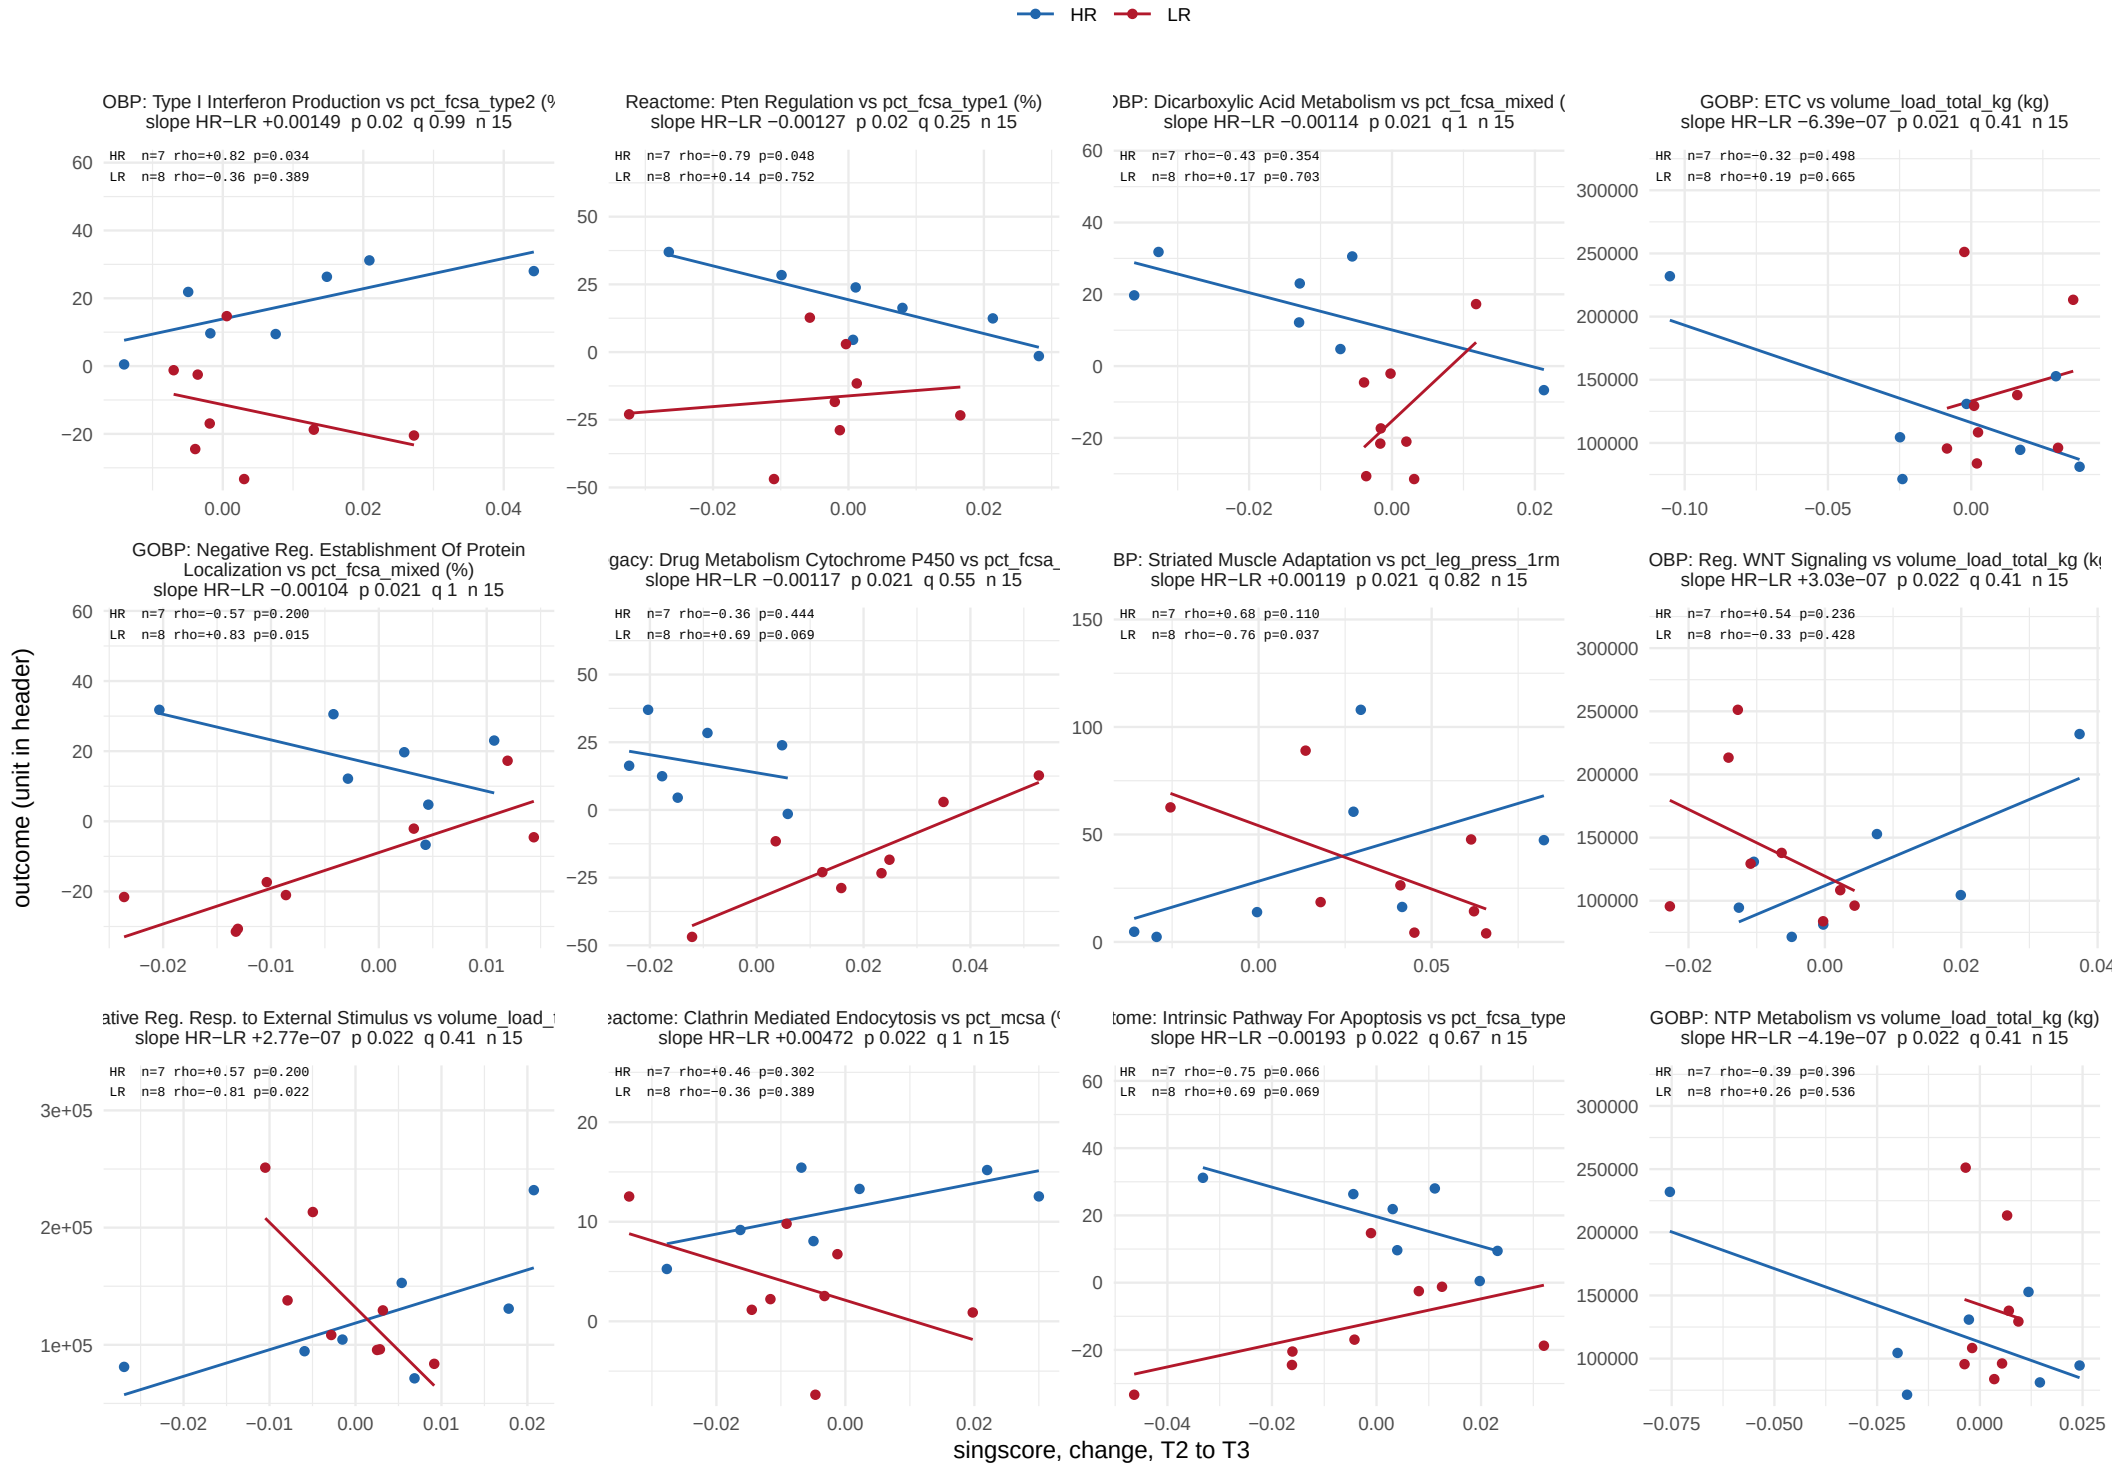

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, acute window


398 of 9646 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 12 of 34.

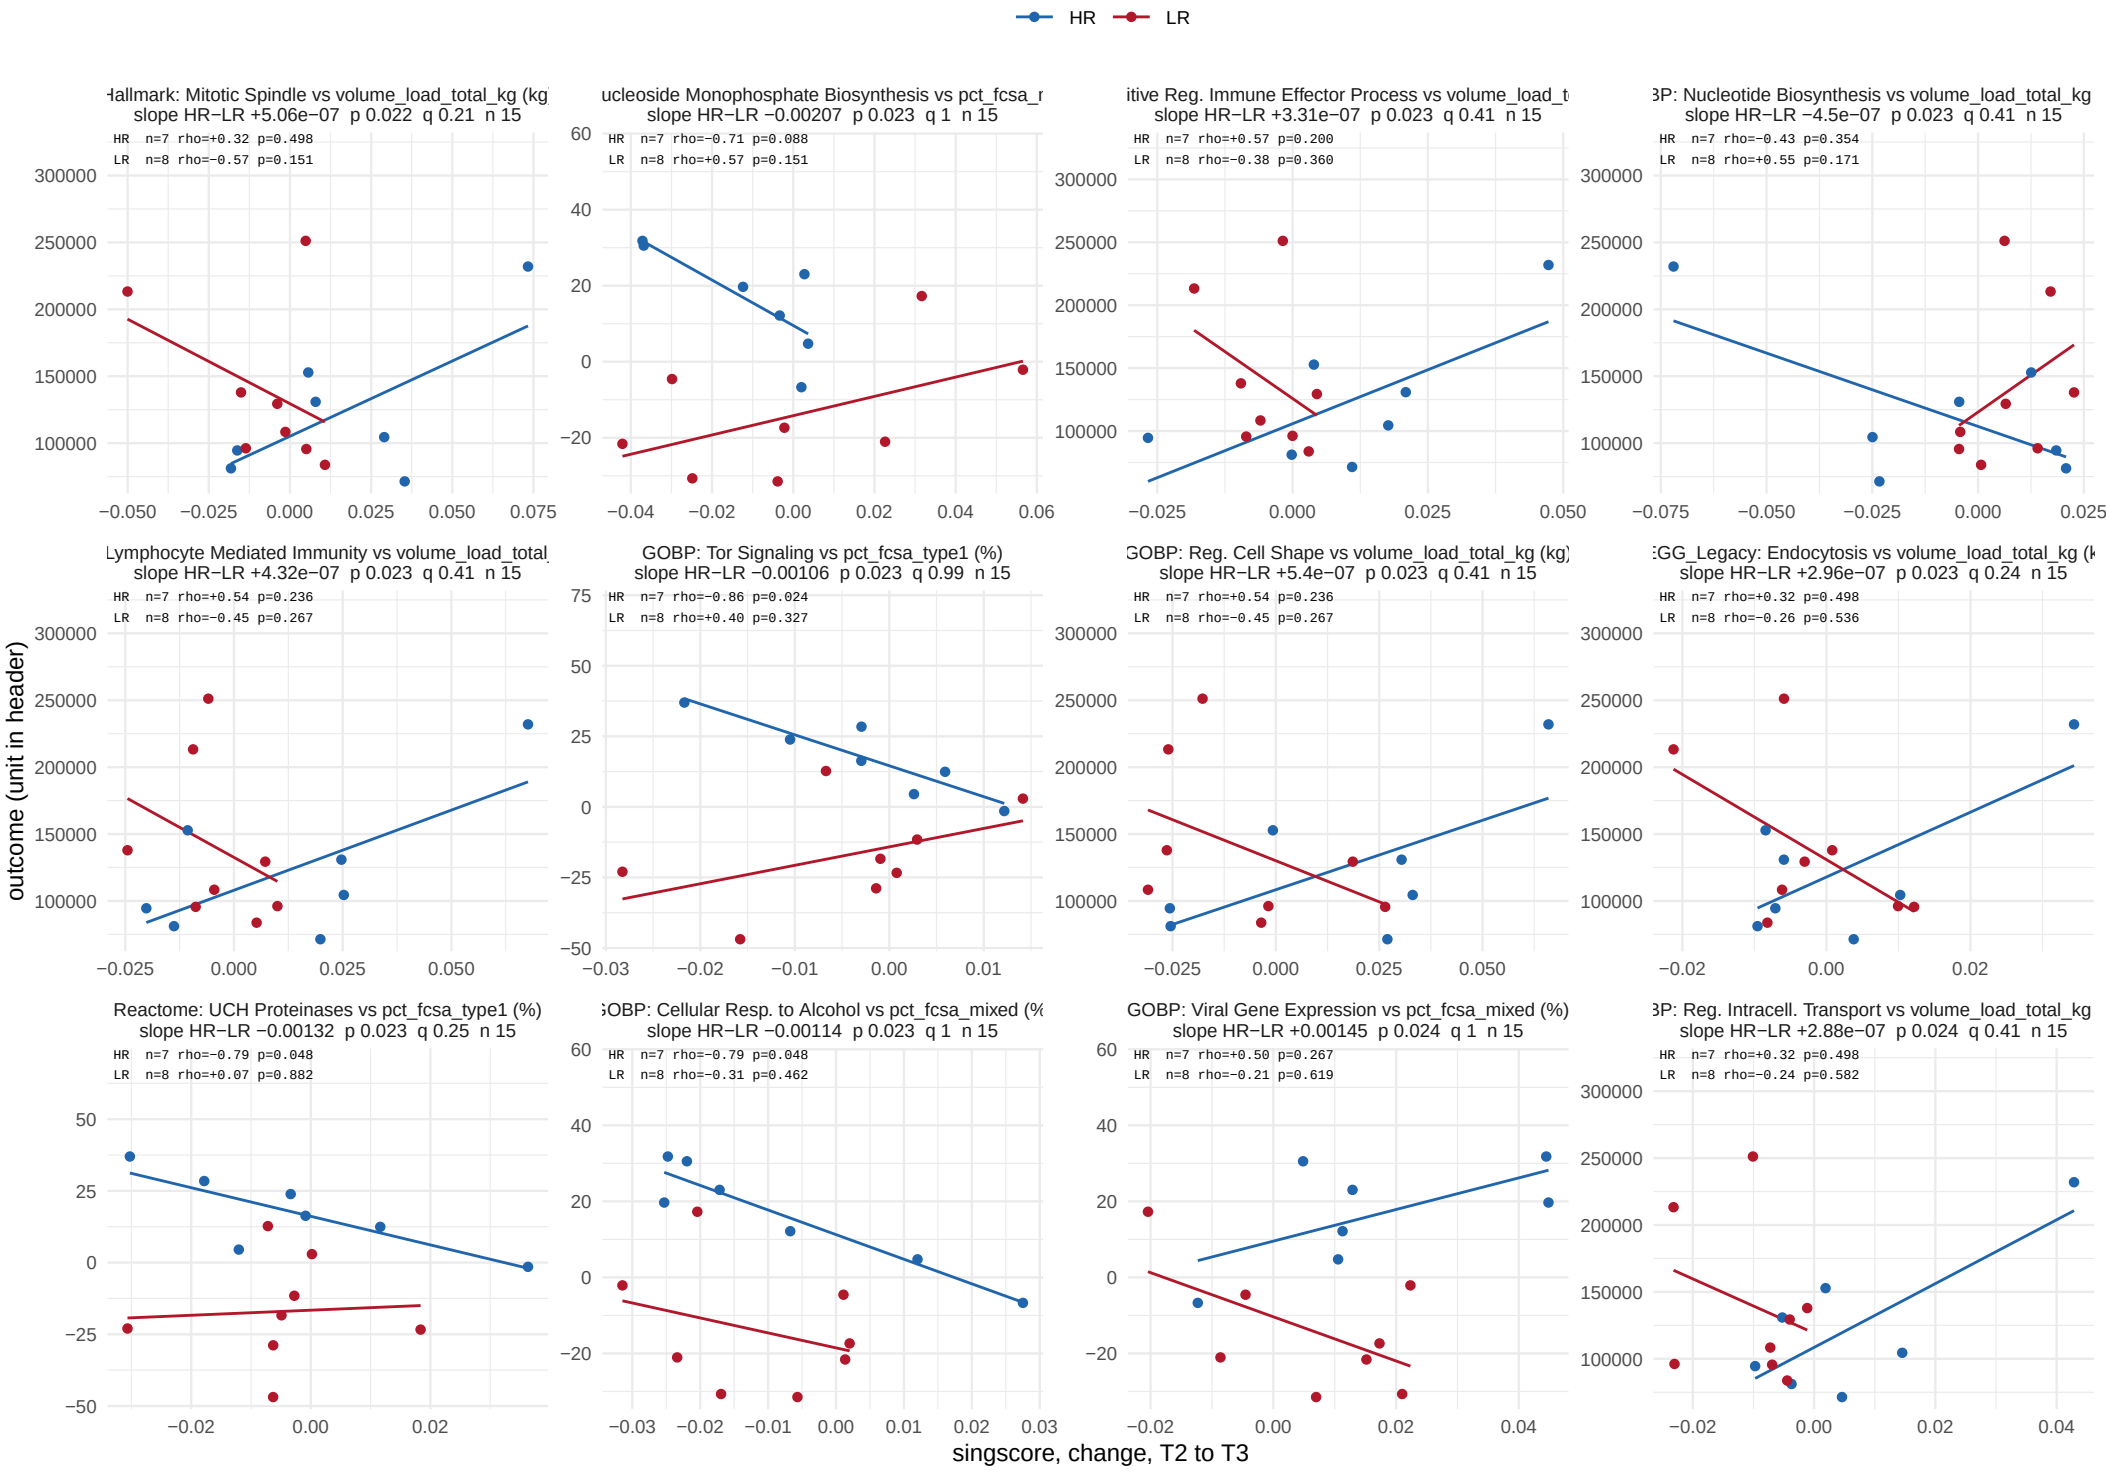

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, acute window


398 of 9646 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 13 of 34.

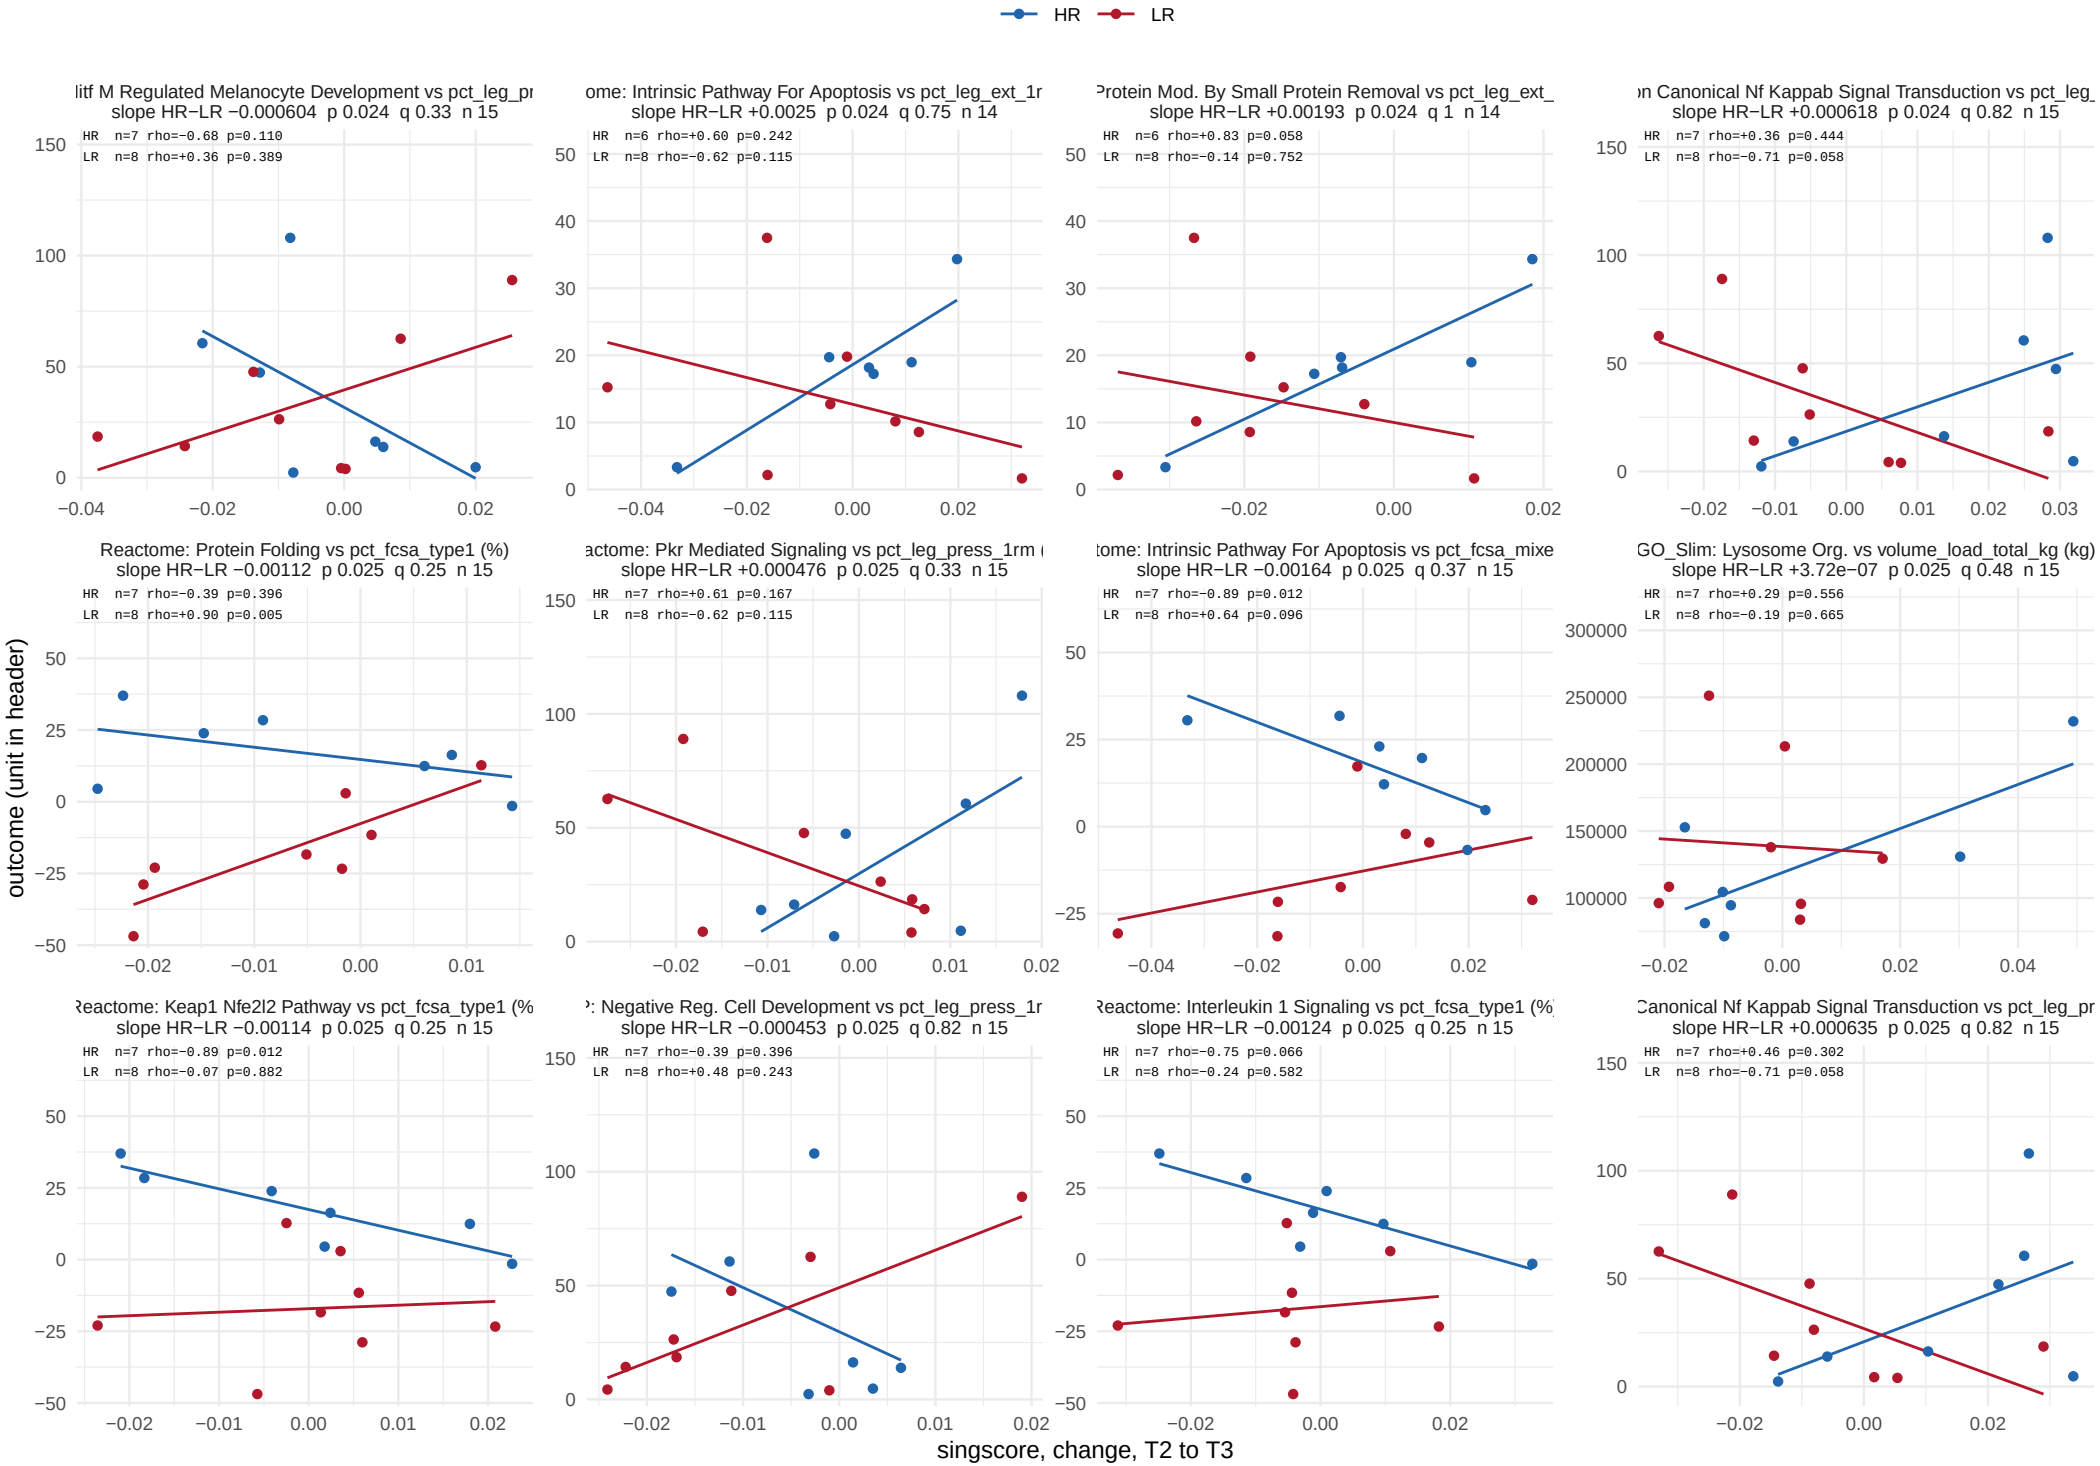

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, acute window


398 of 9646 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 14 of 34.

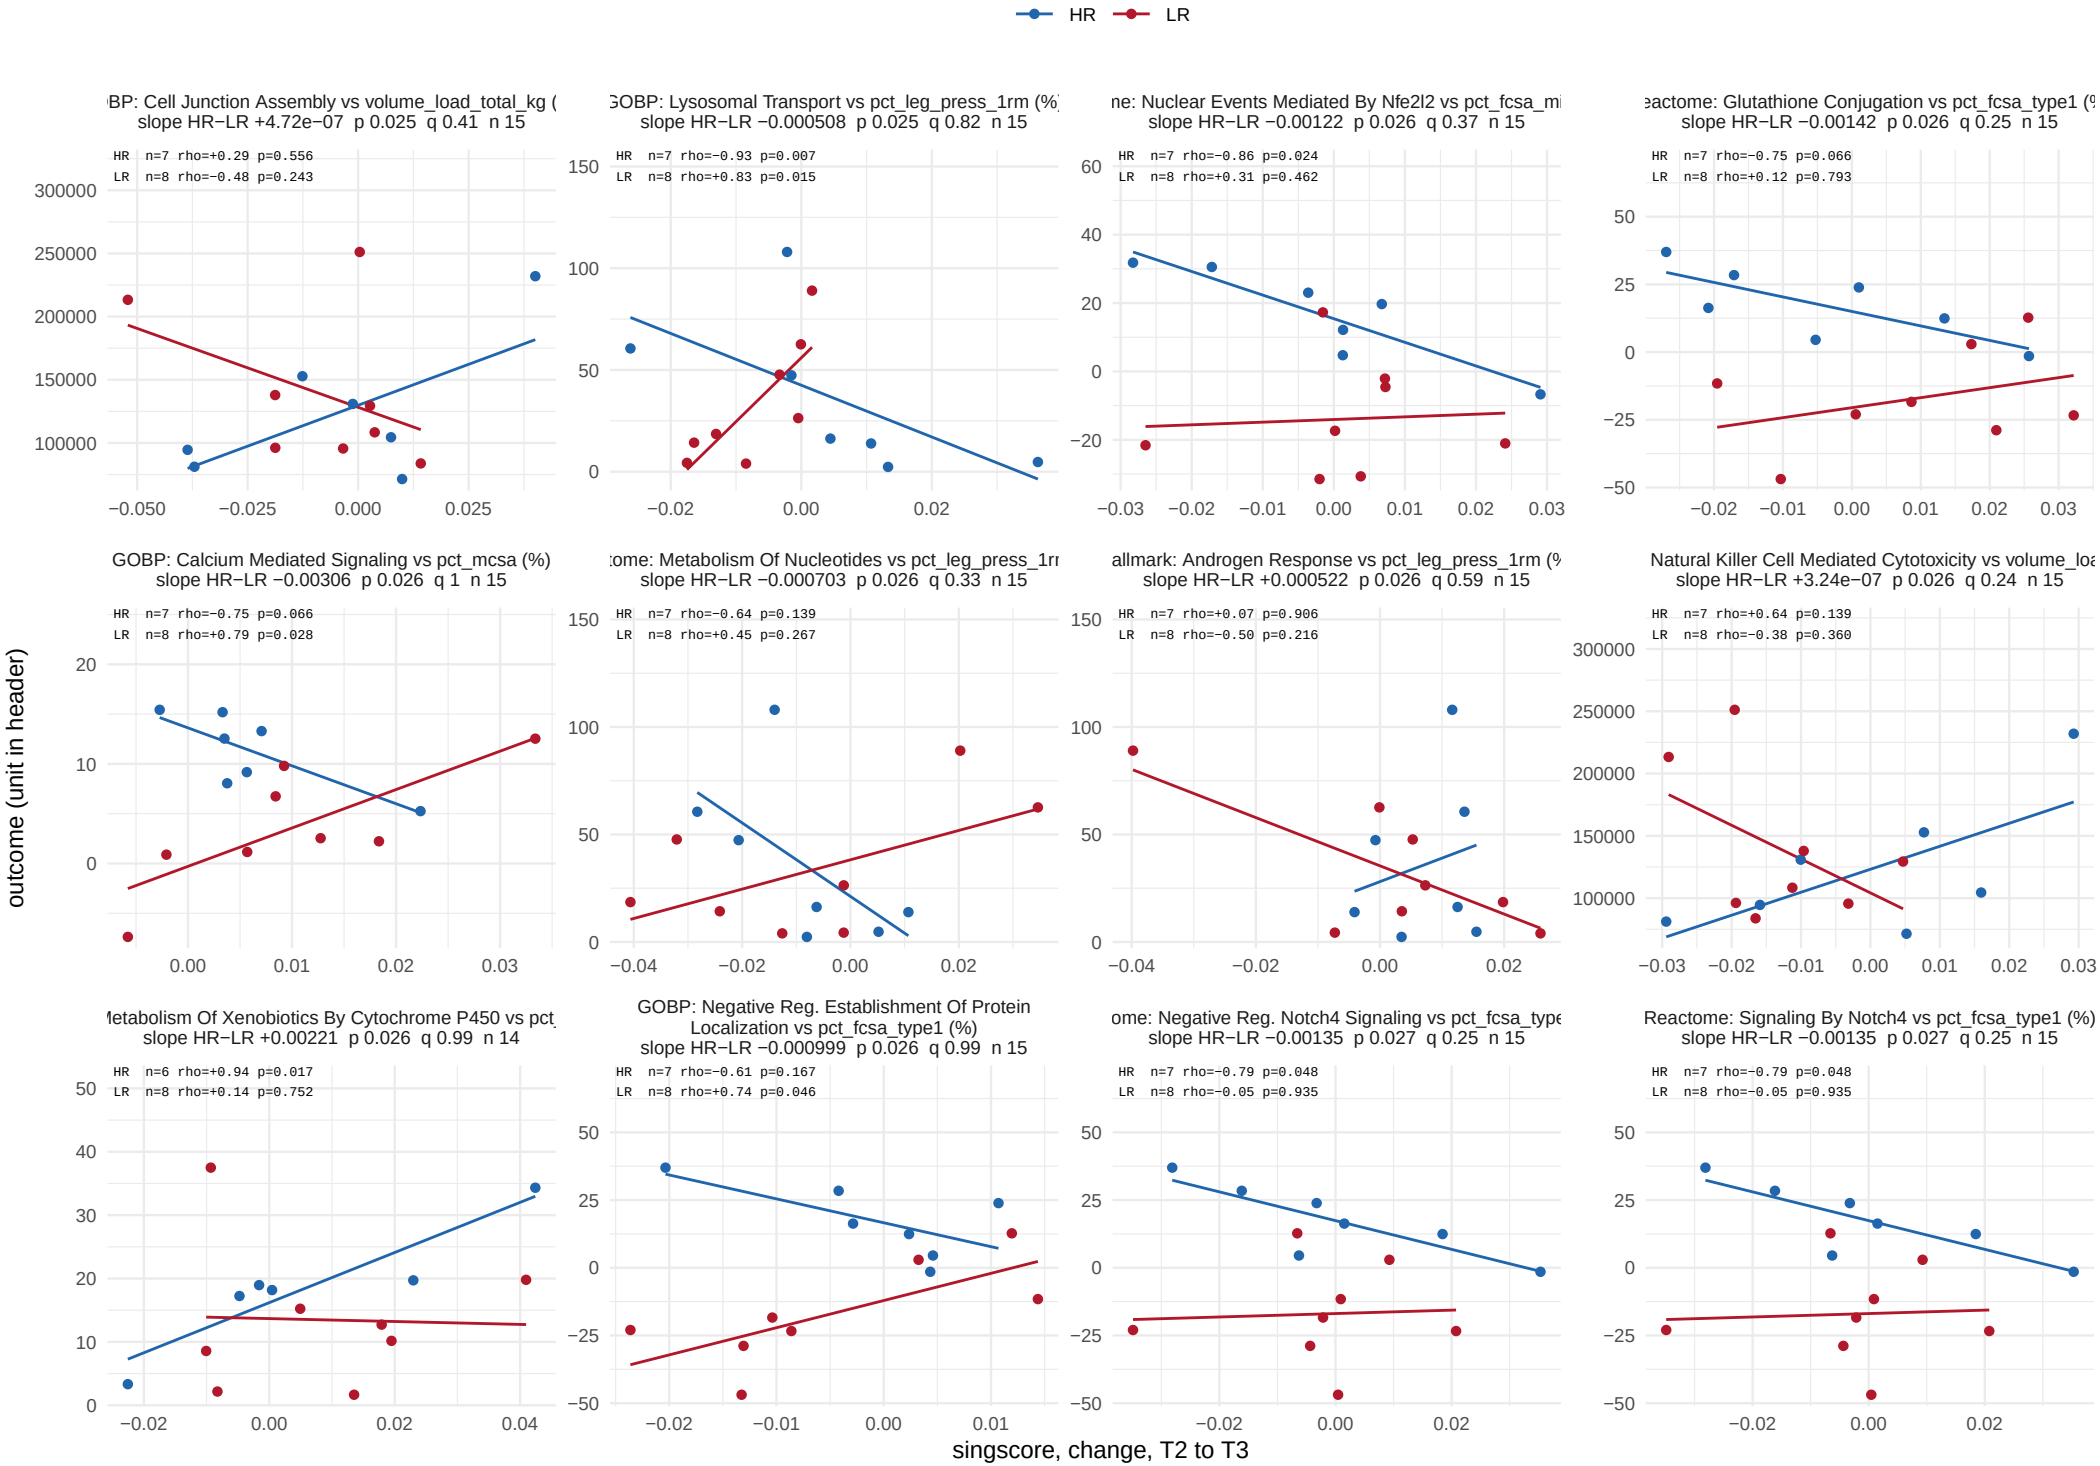

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, acute window


398 of 9646 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 15 of 34.

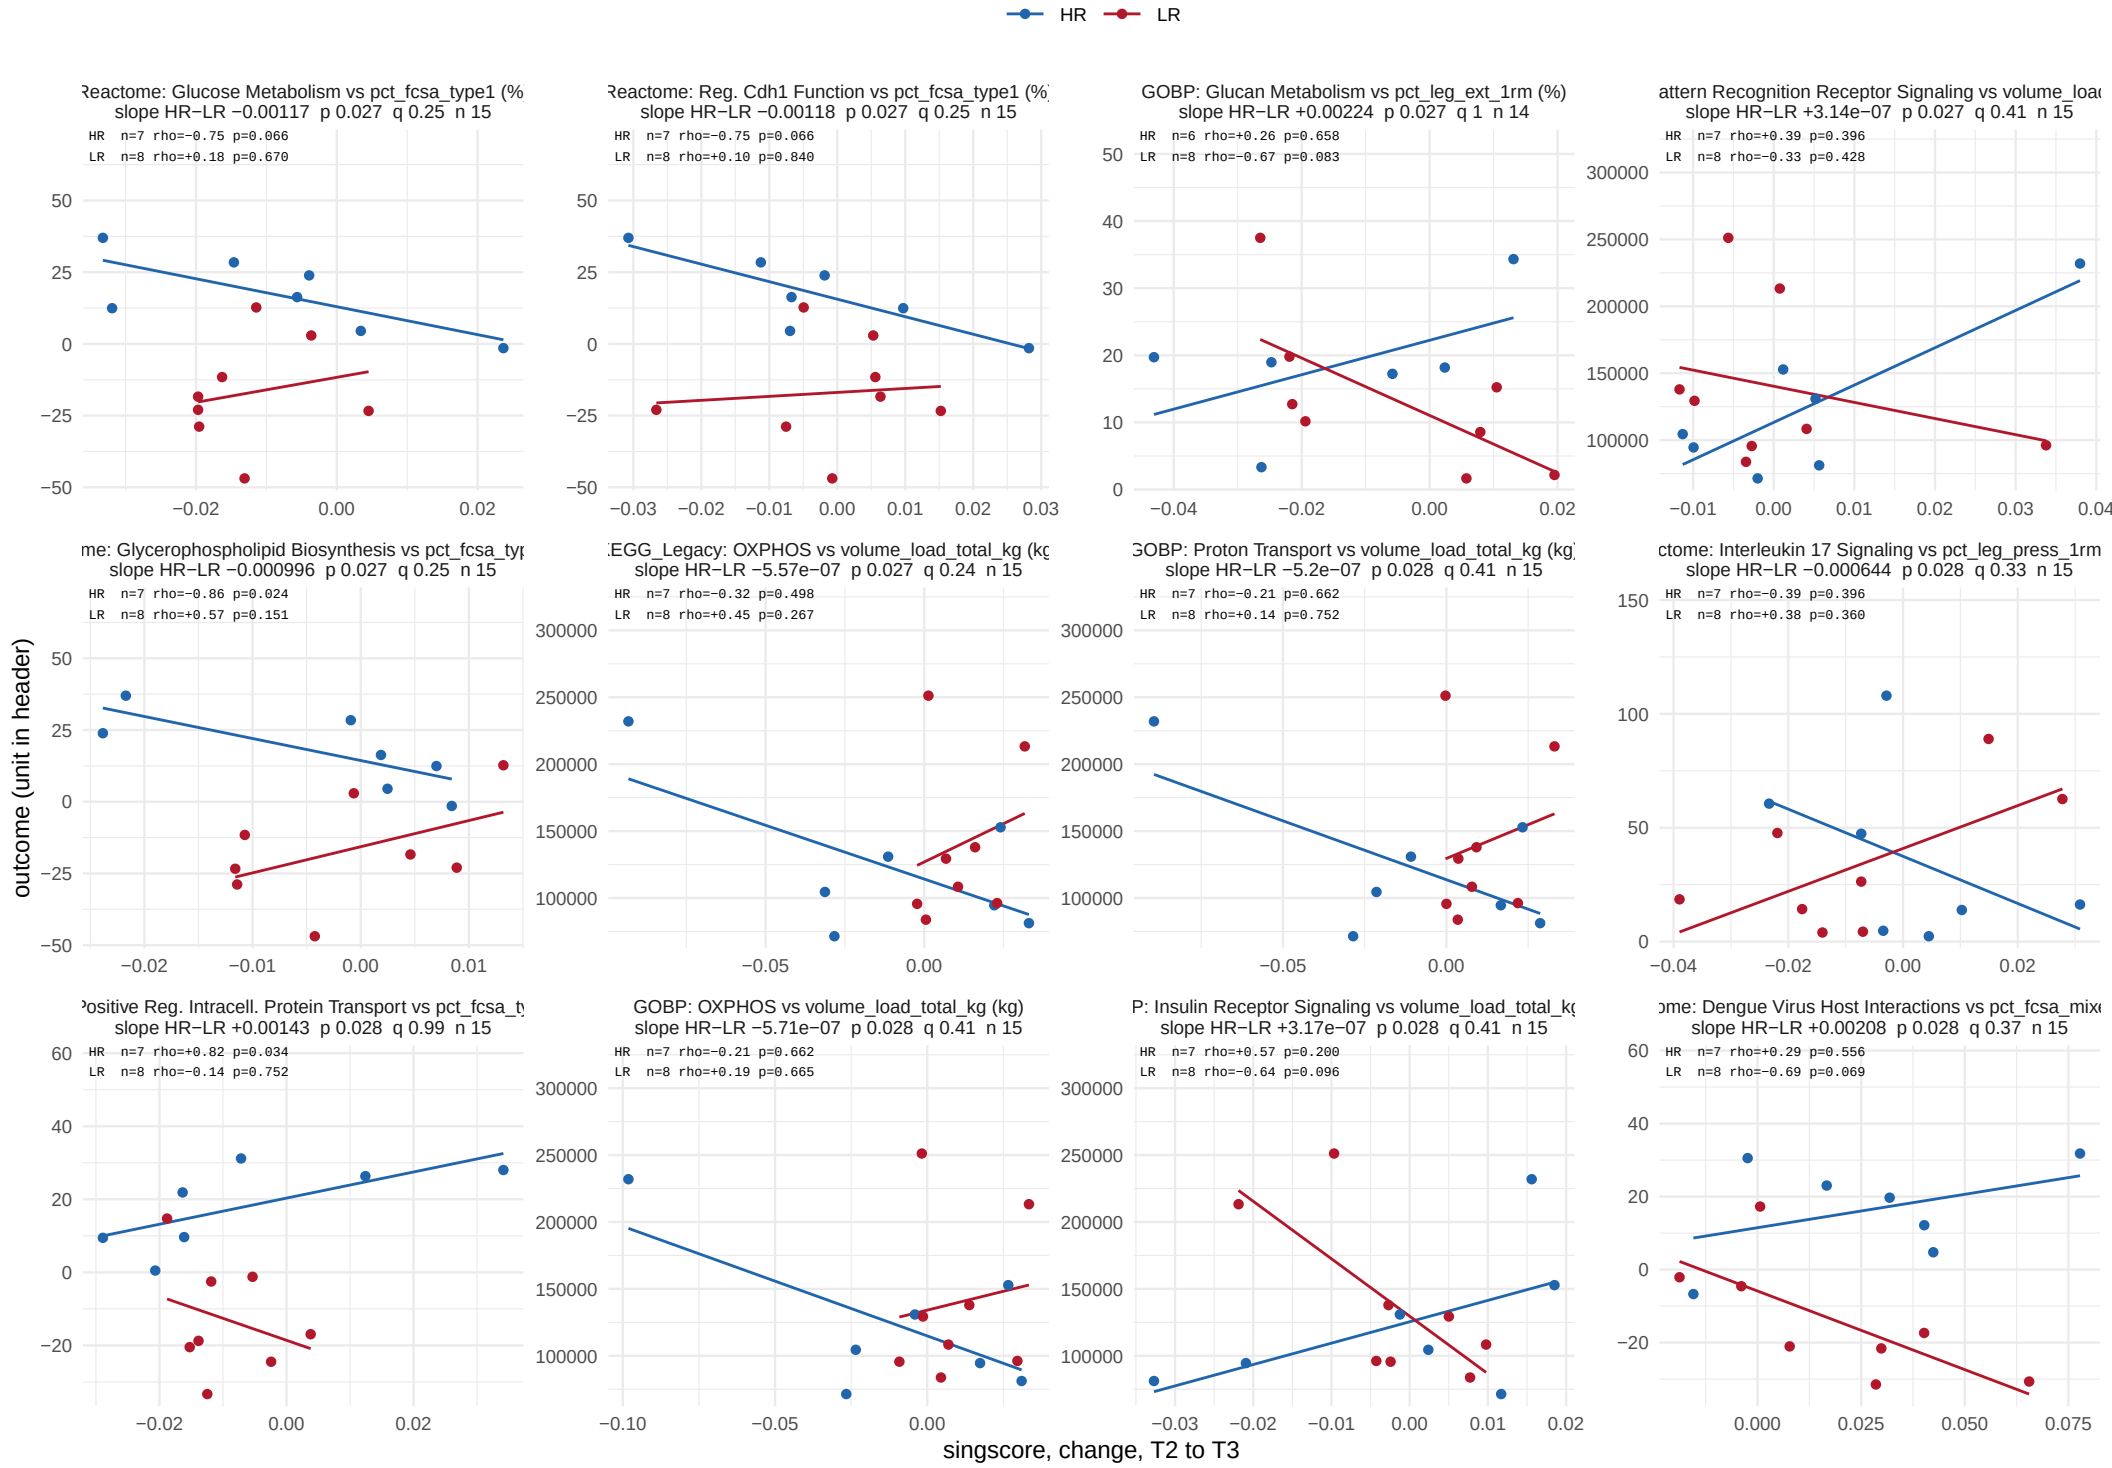

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, acute window


398 of 9646 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 16 of 34.

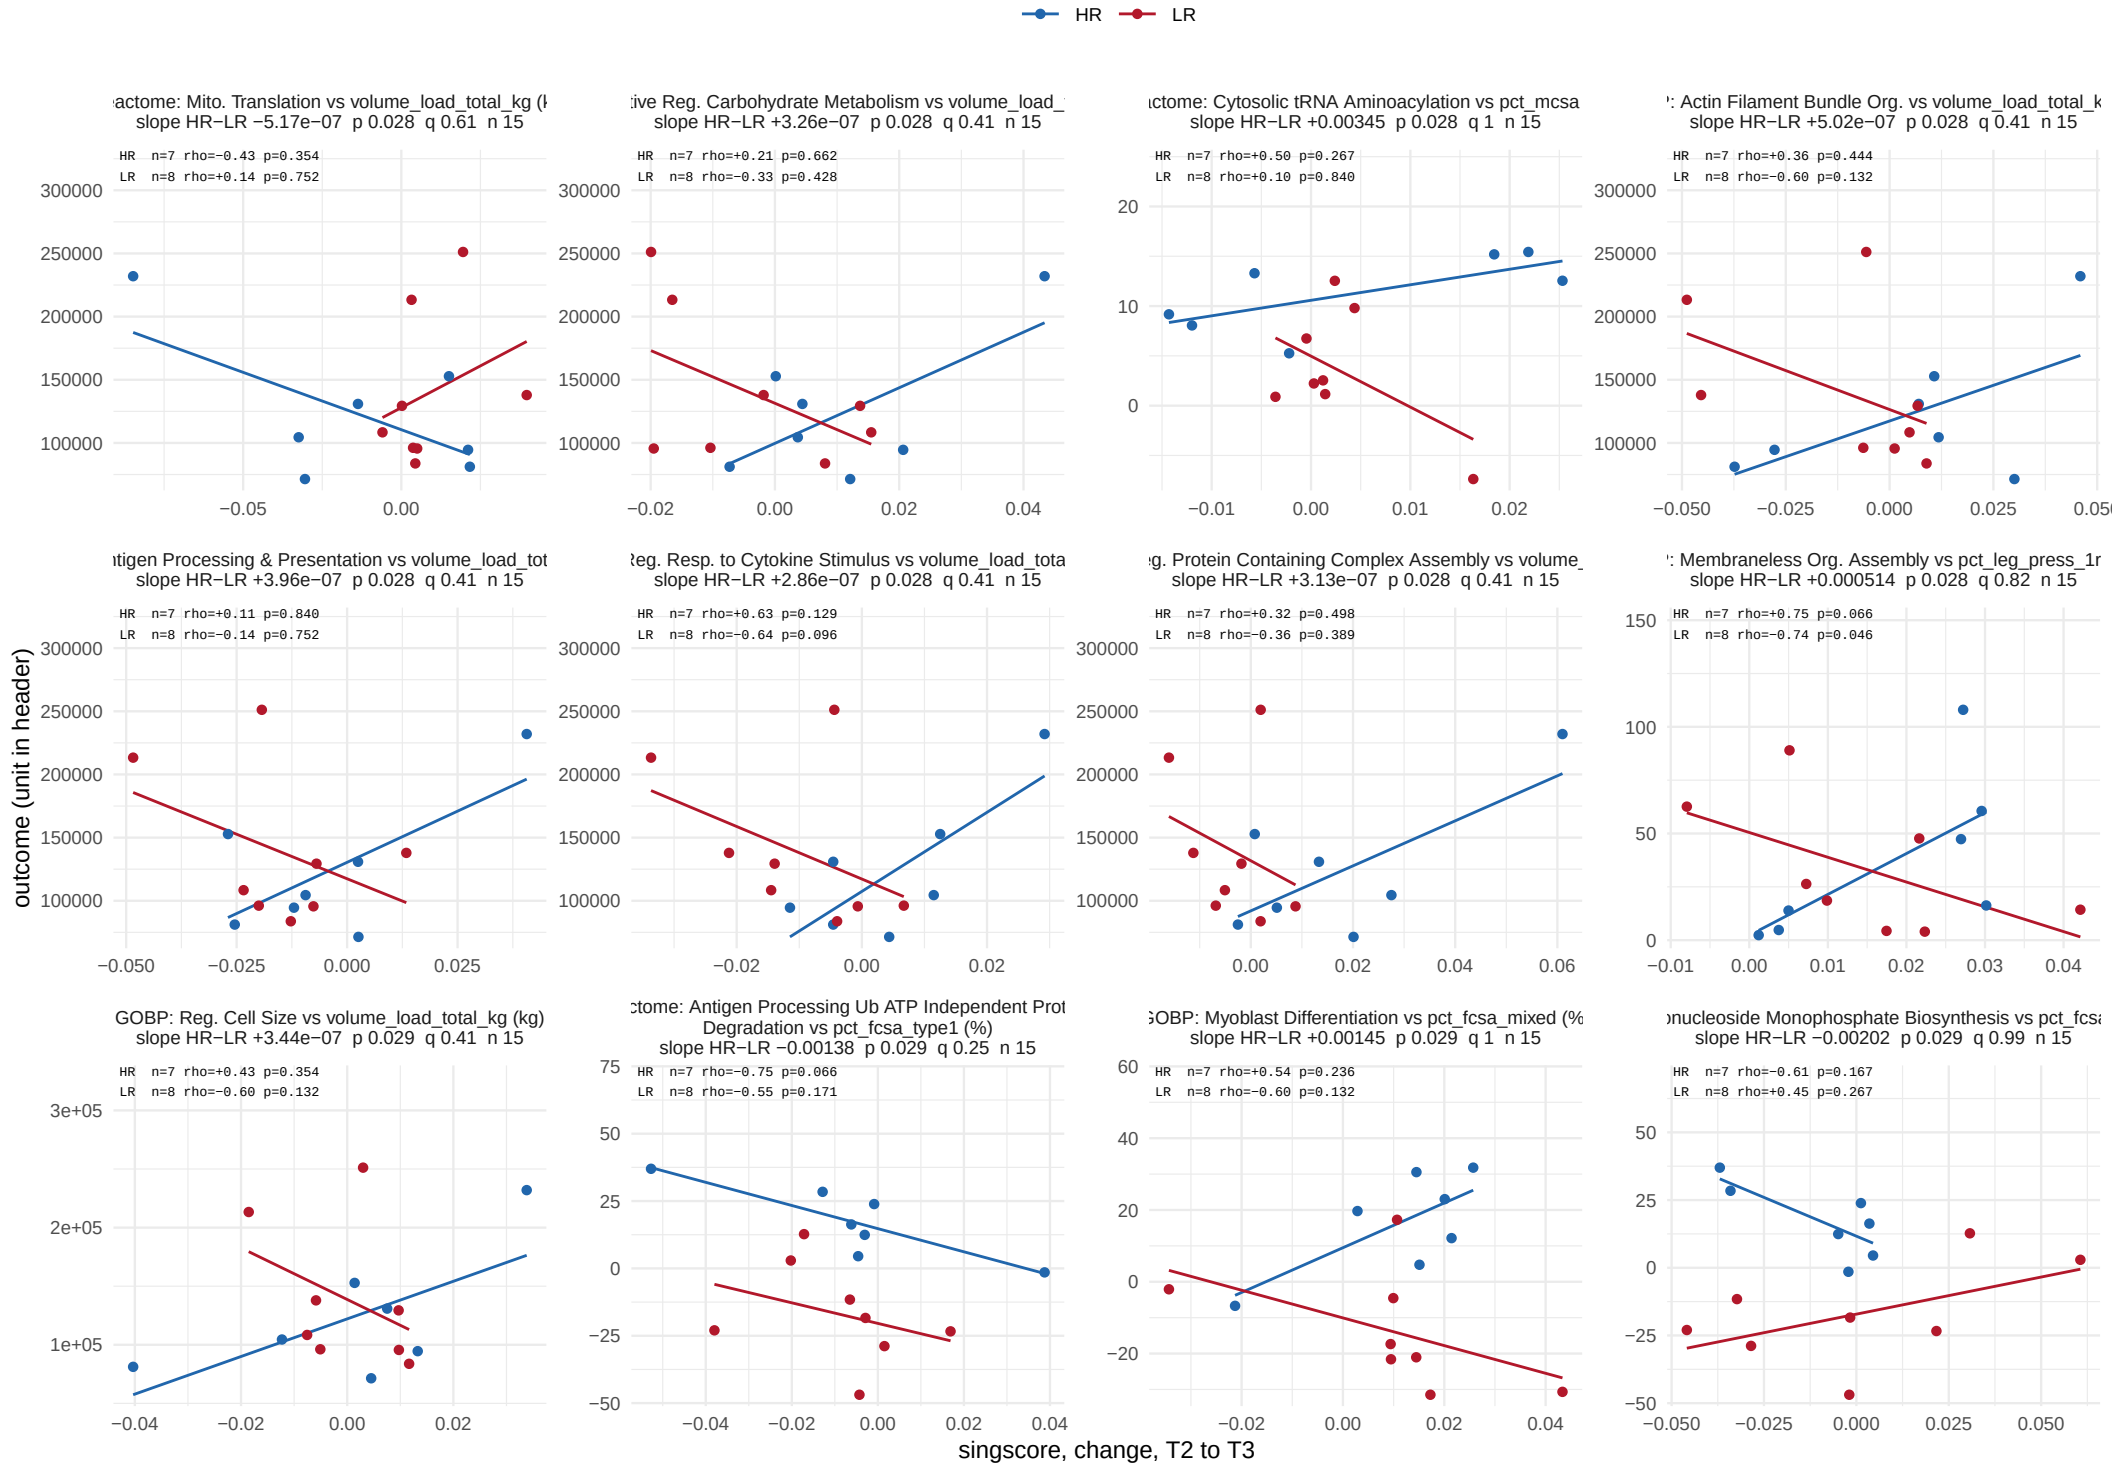

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, acute window


398 of 9646 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 17 of 34.

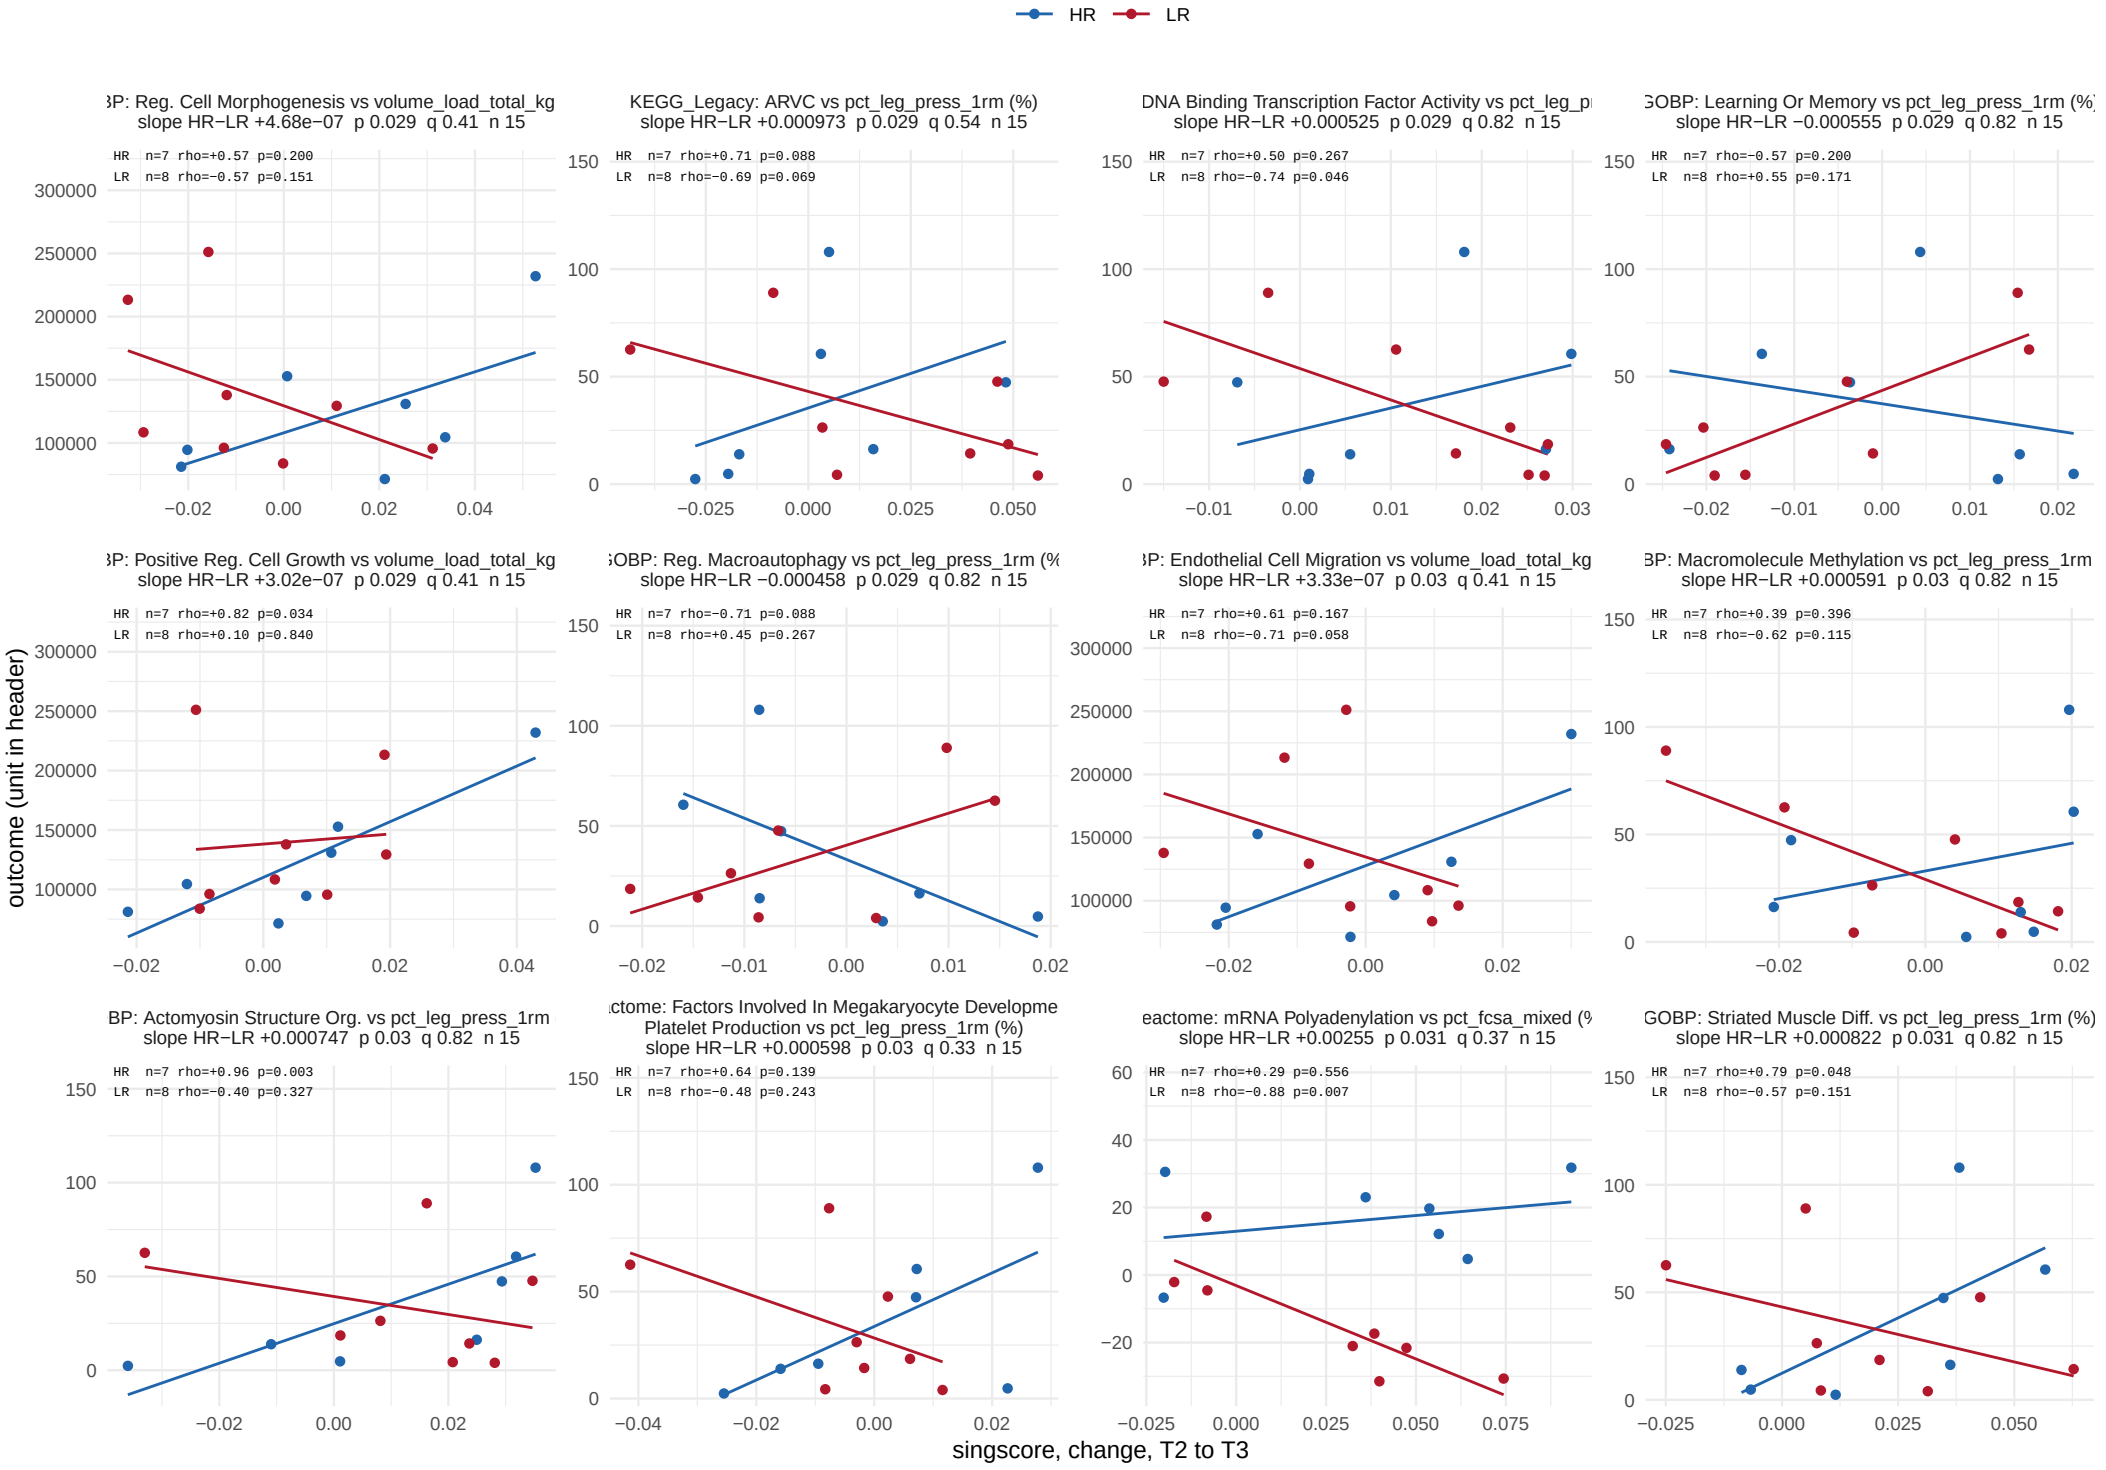

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, acute window


398 of 9646 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 18 of 34.

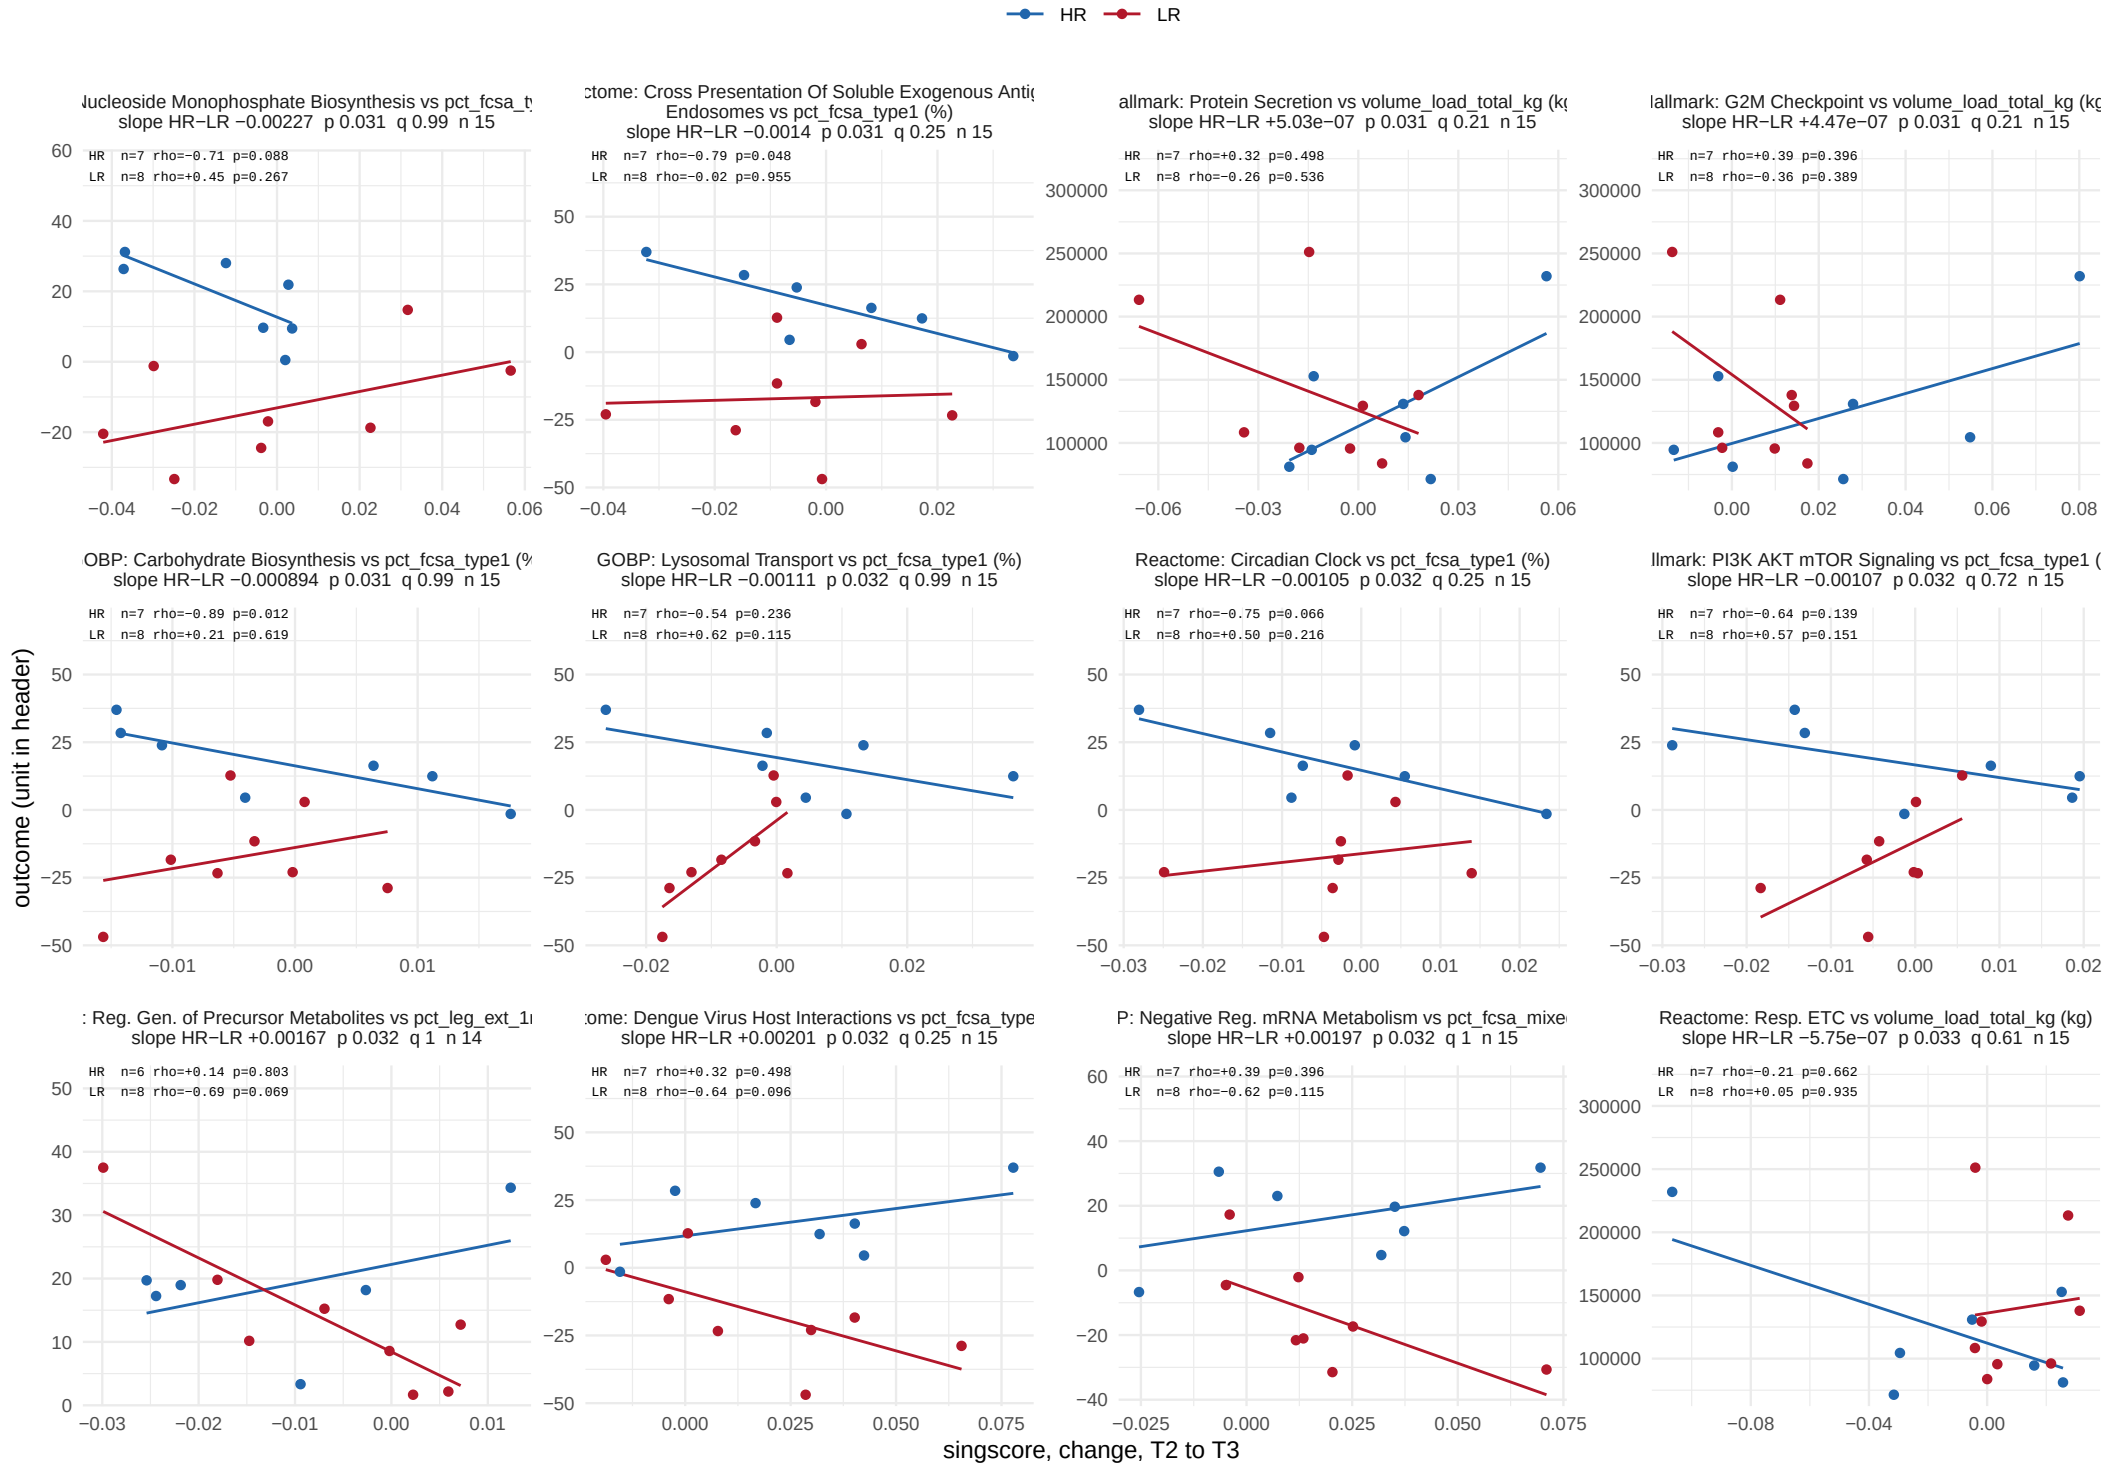

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, acute window


398 of 9646 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 19 of 34.

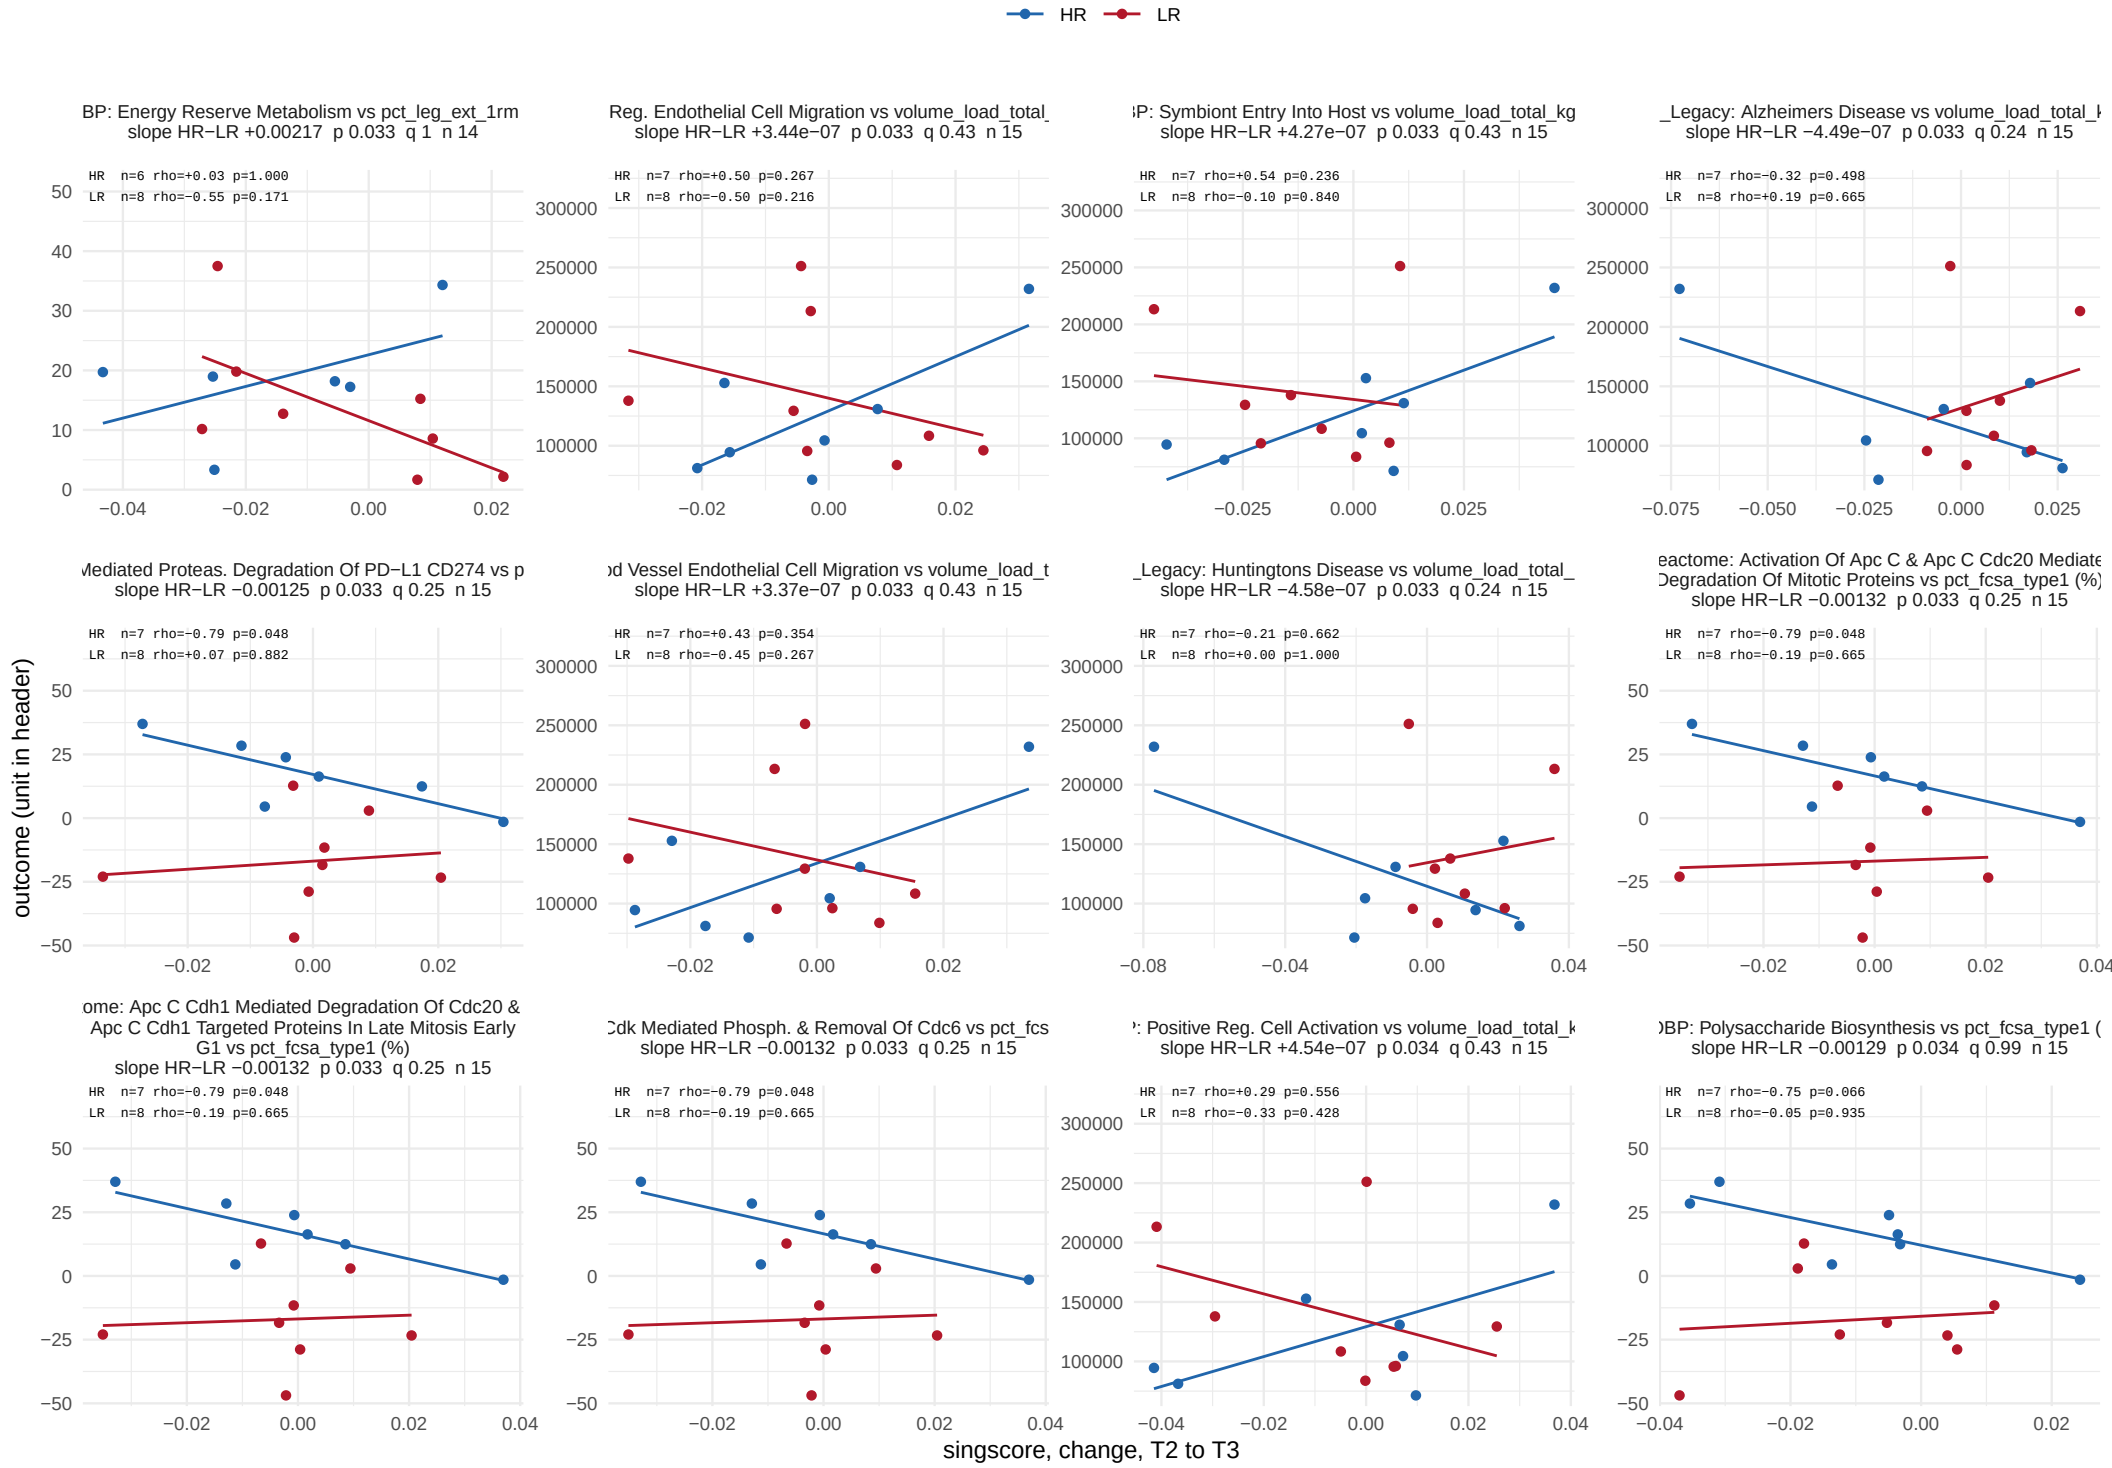

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, acute window


398 of 9646 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 20 of 34.

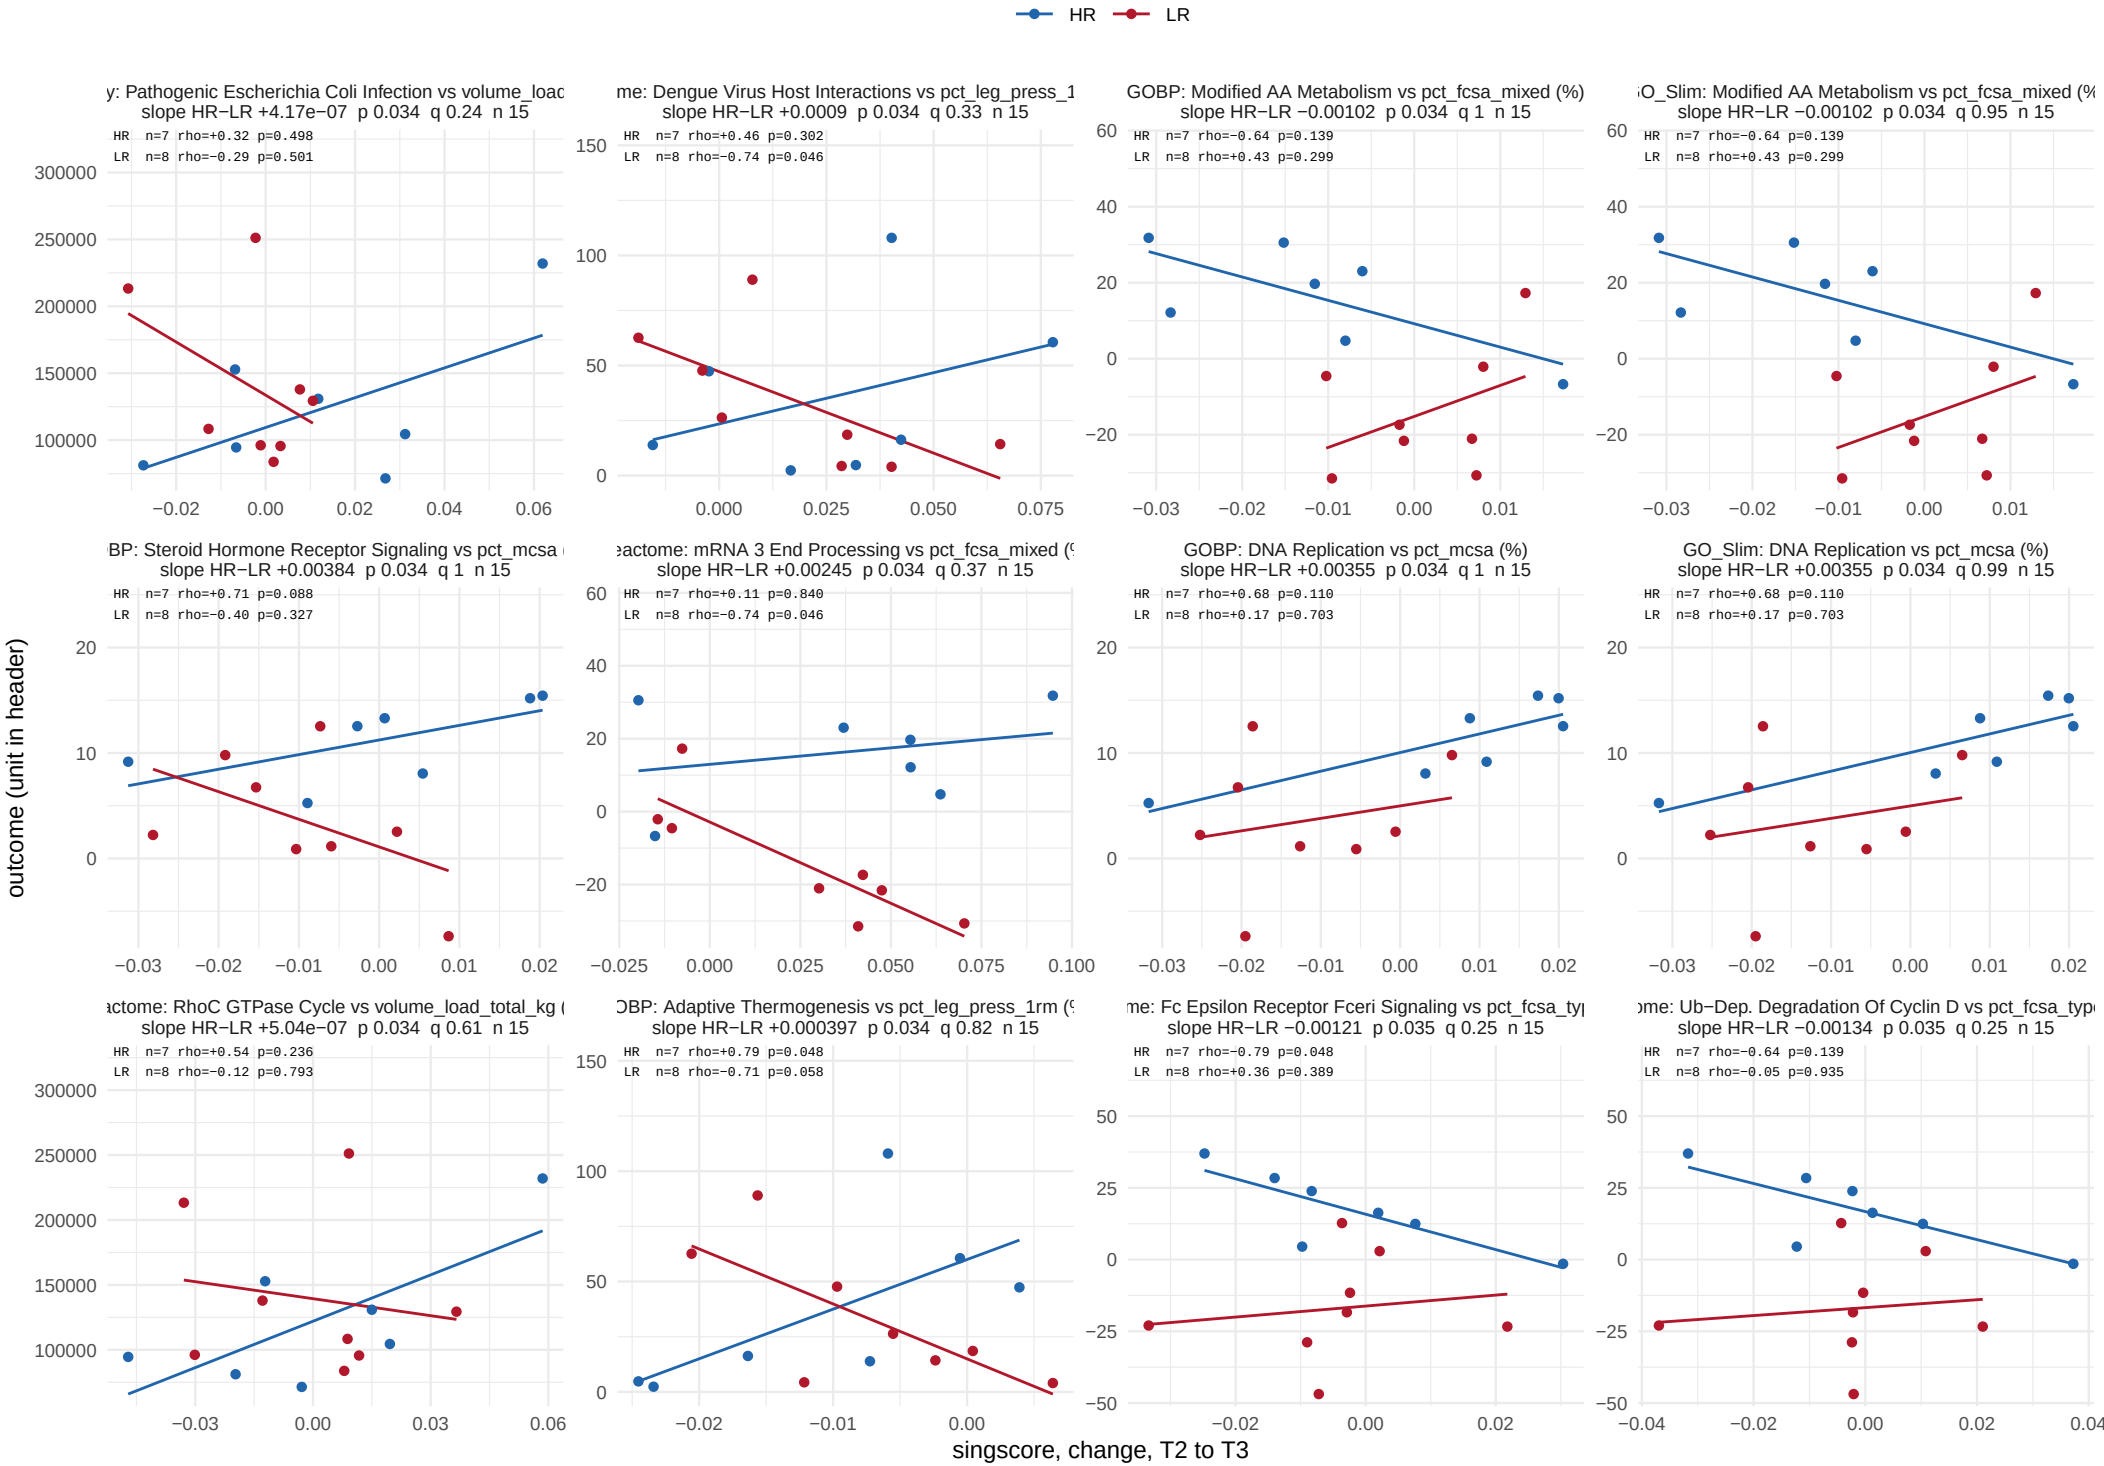

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, acute window


398 of 9646 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 21 of 34.

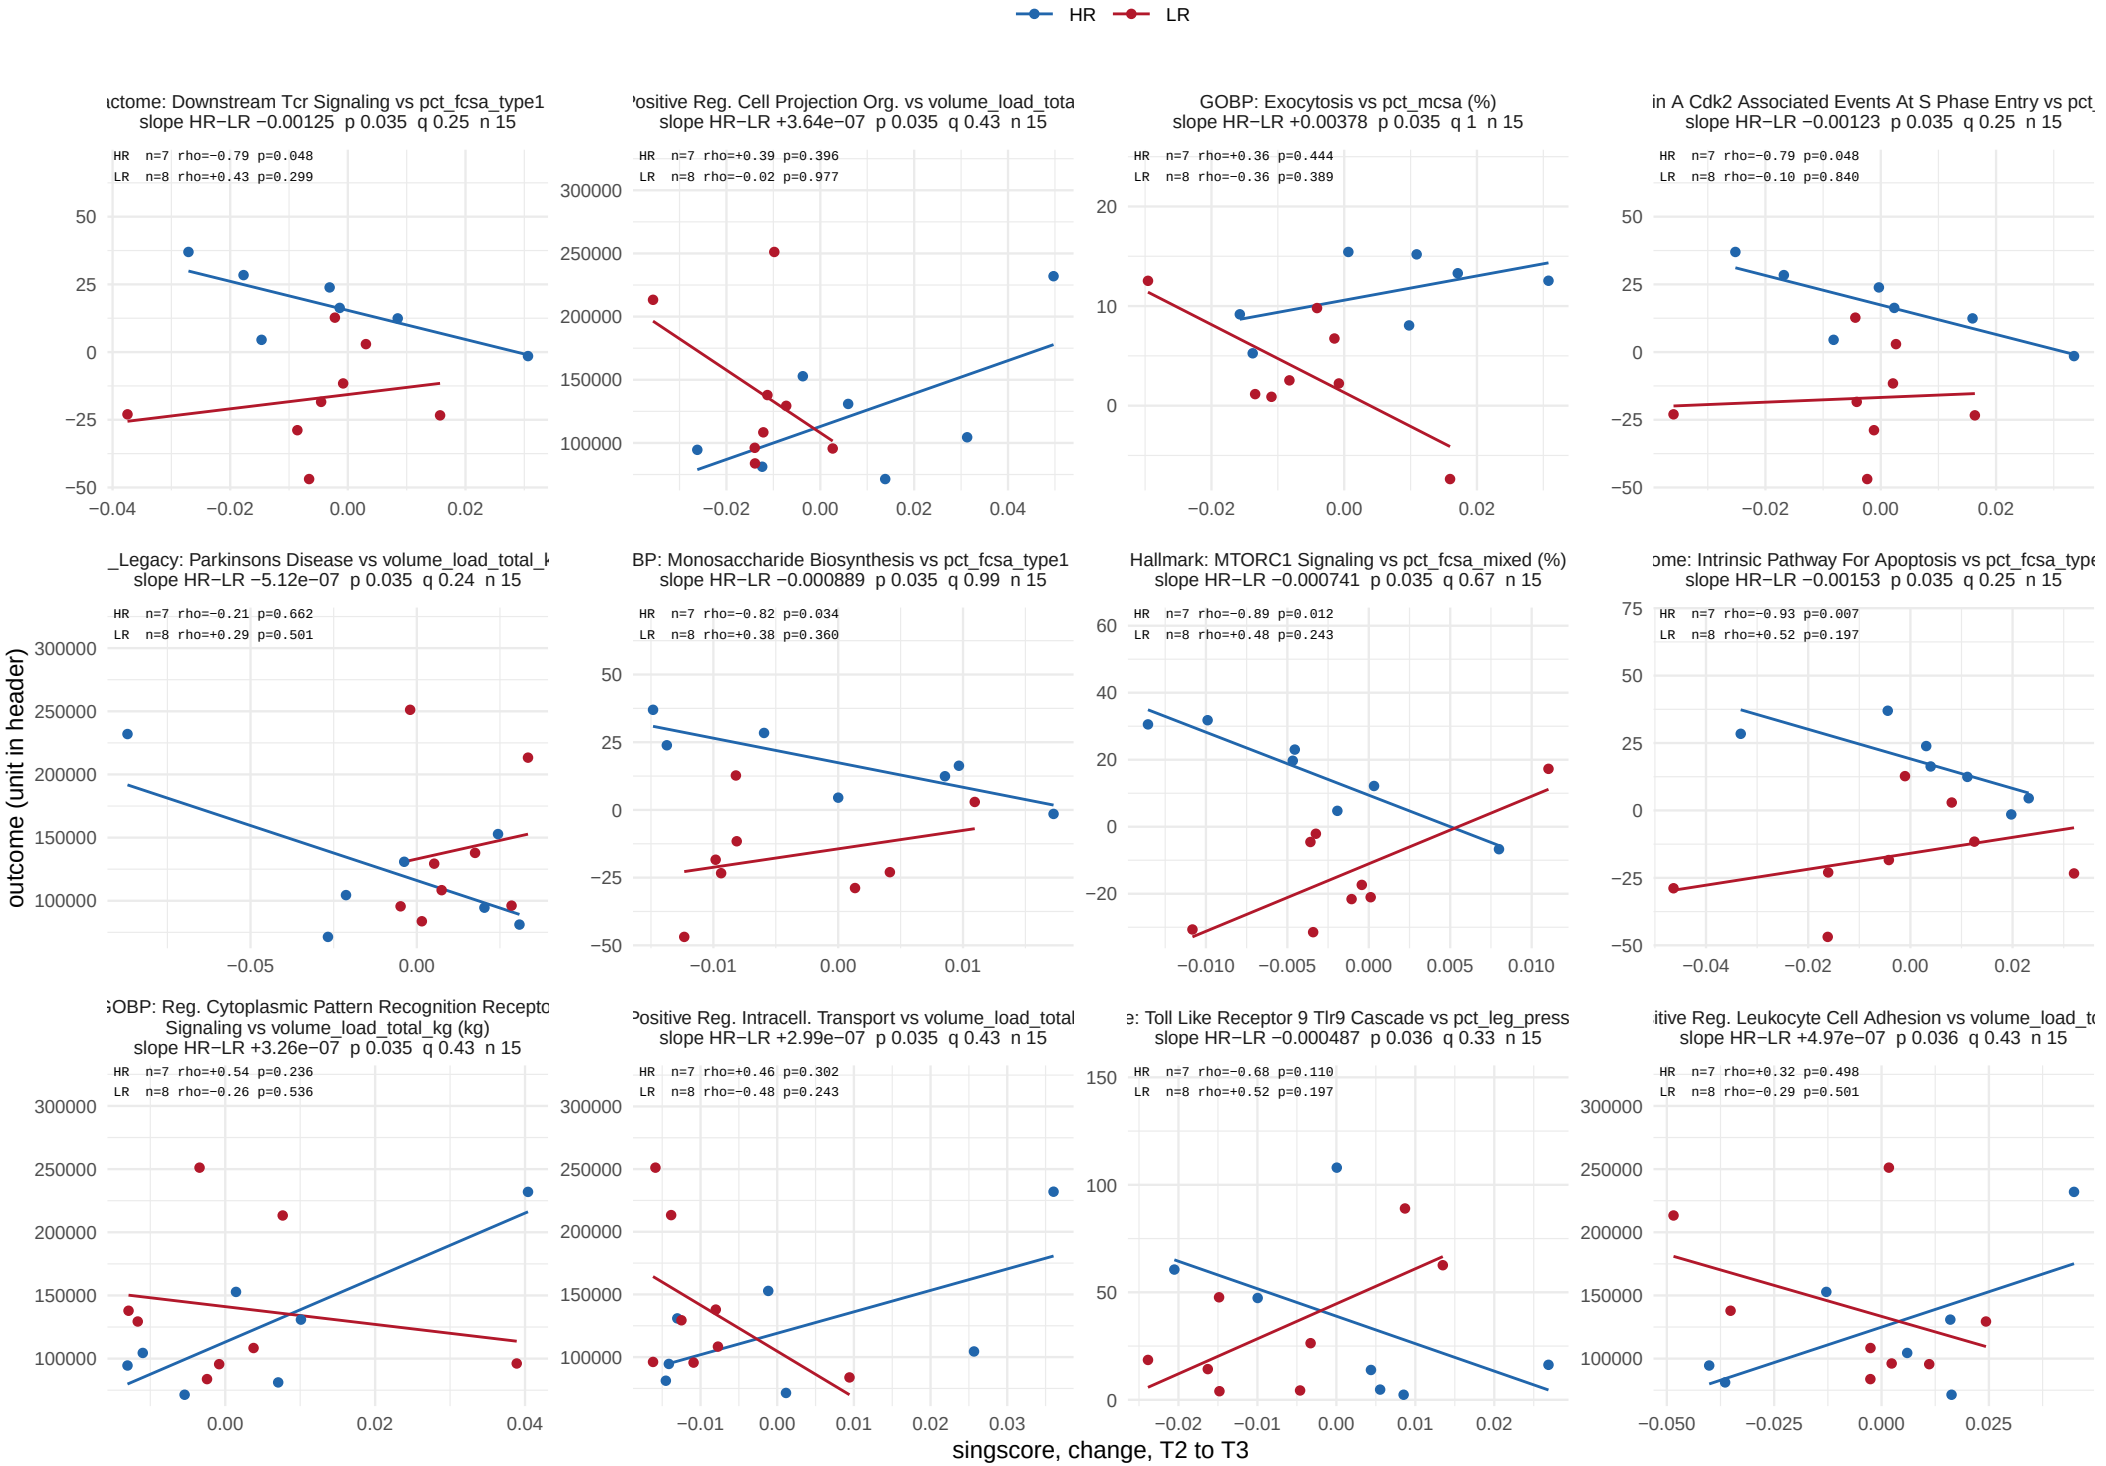

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, acute window


398 of 9646 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 22 of 34.

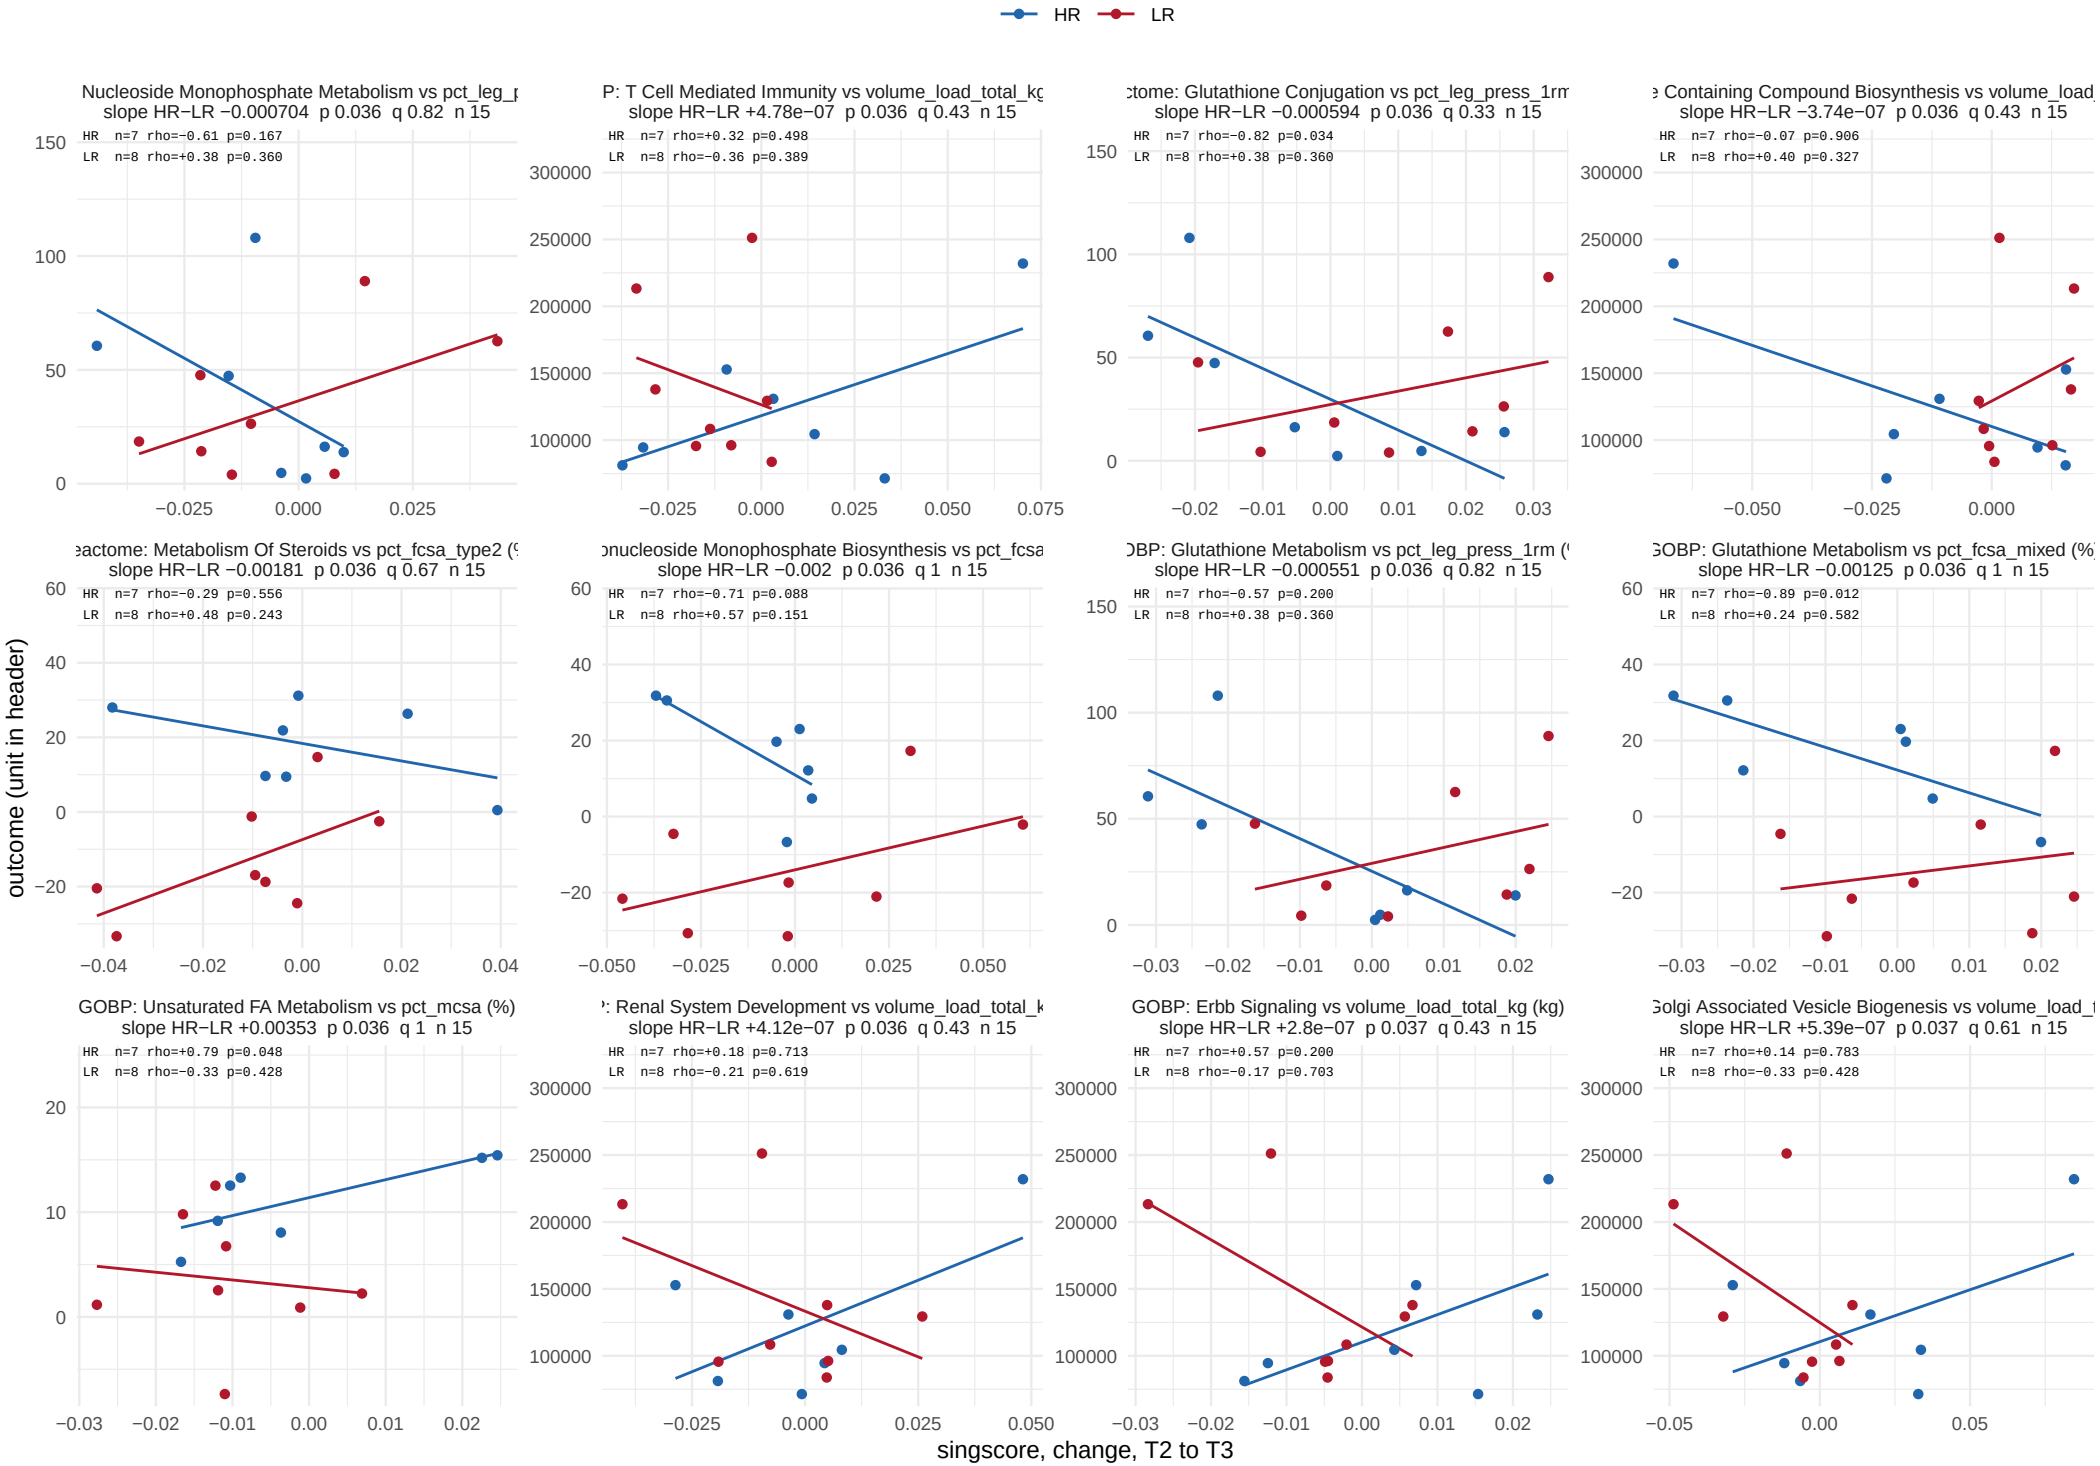

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, acute window


398 of 9646 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 23 of 34.

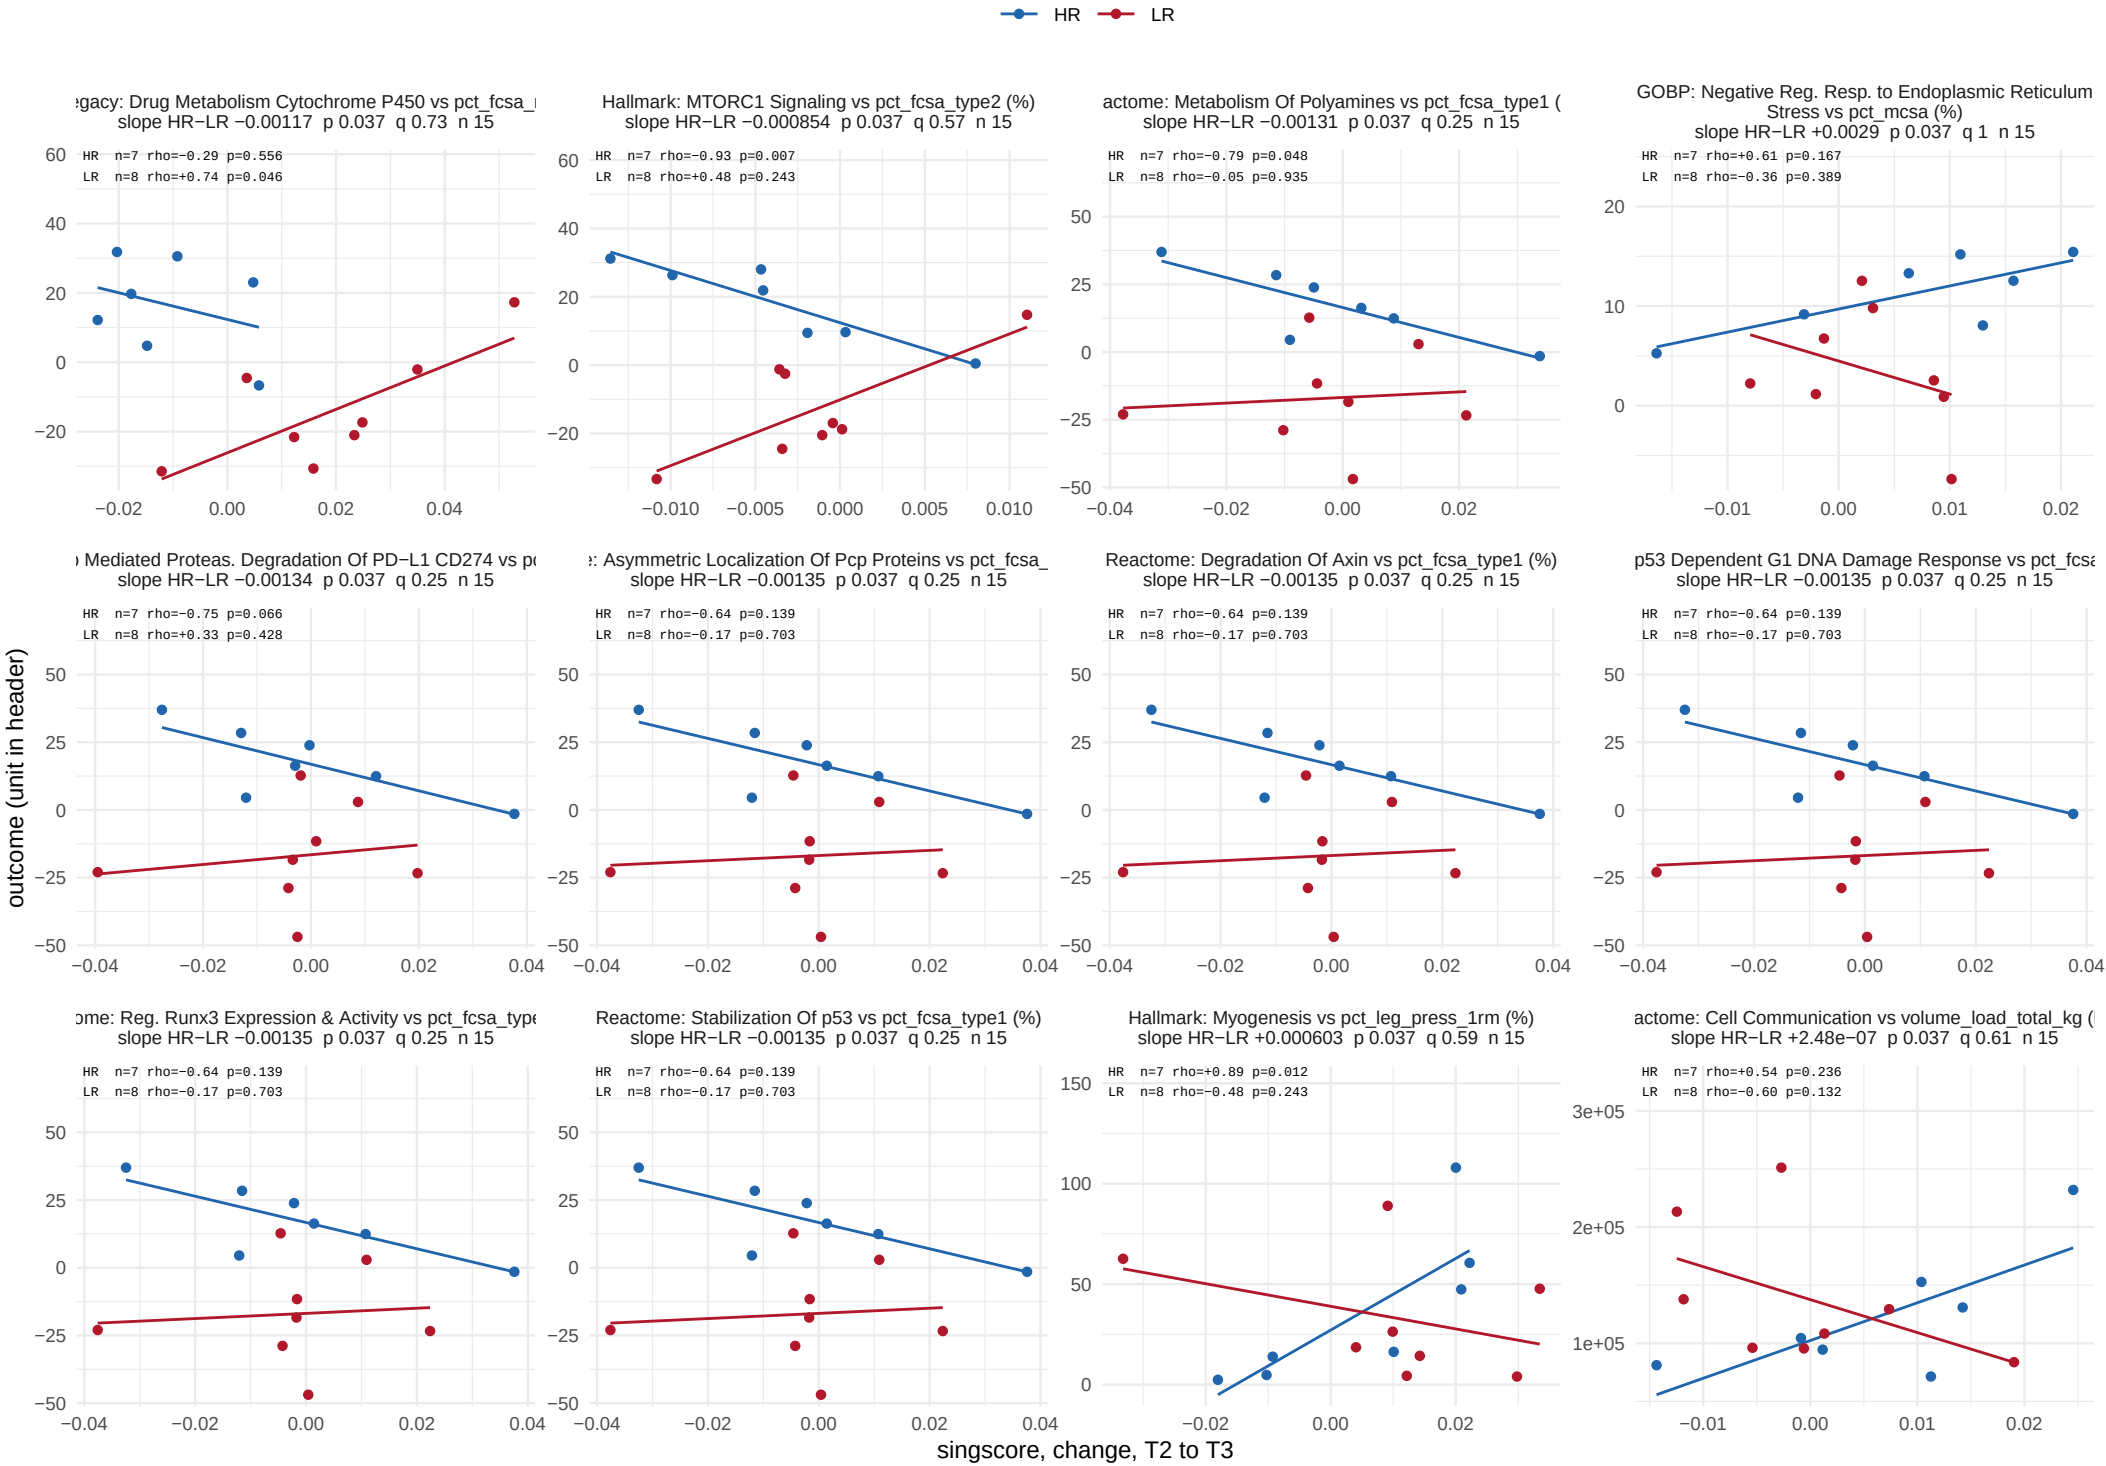

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, acute window


398 of 9646 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 24 of 34.

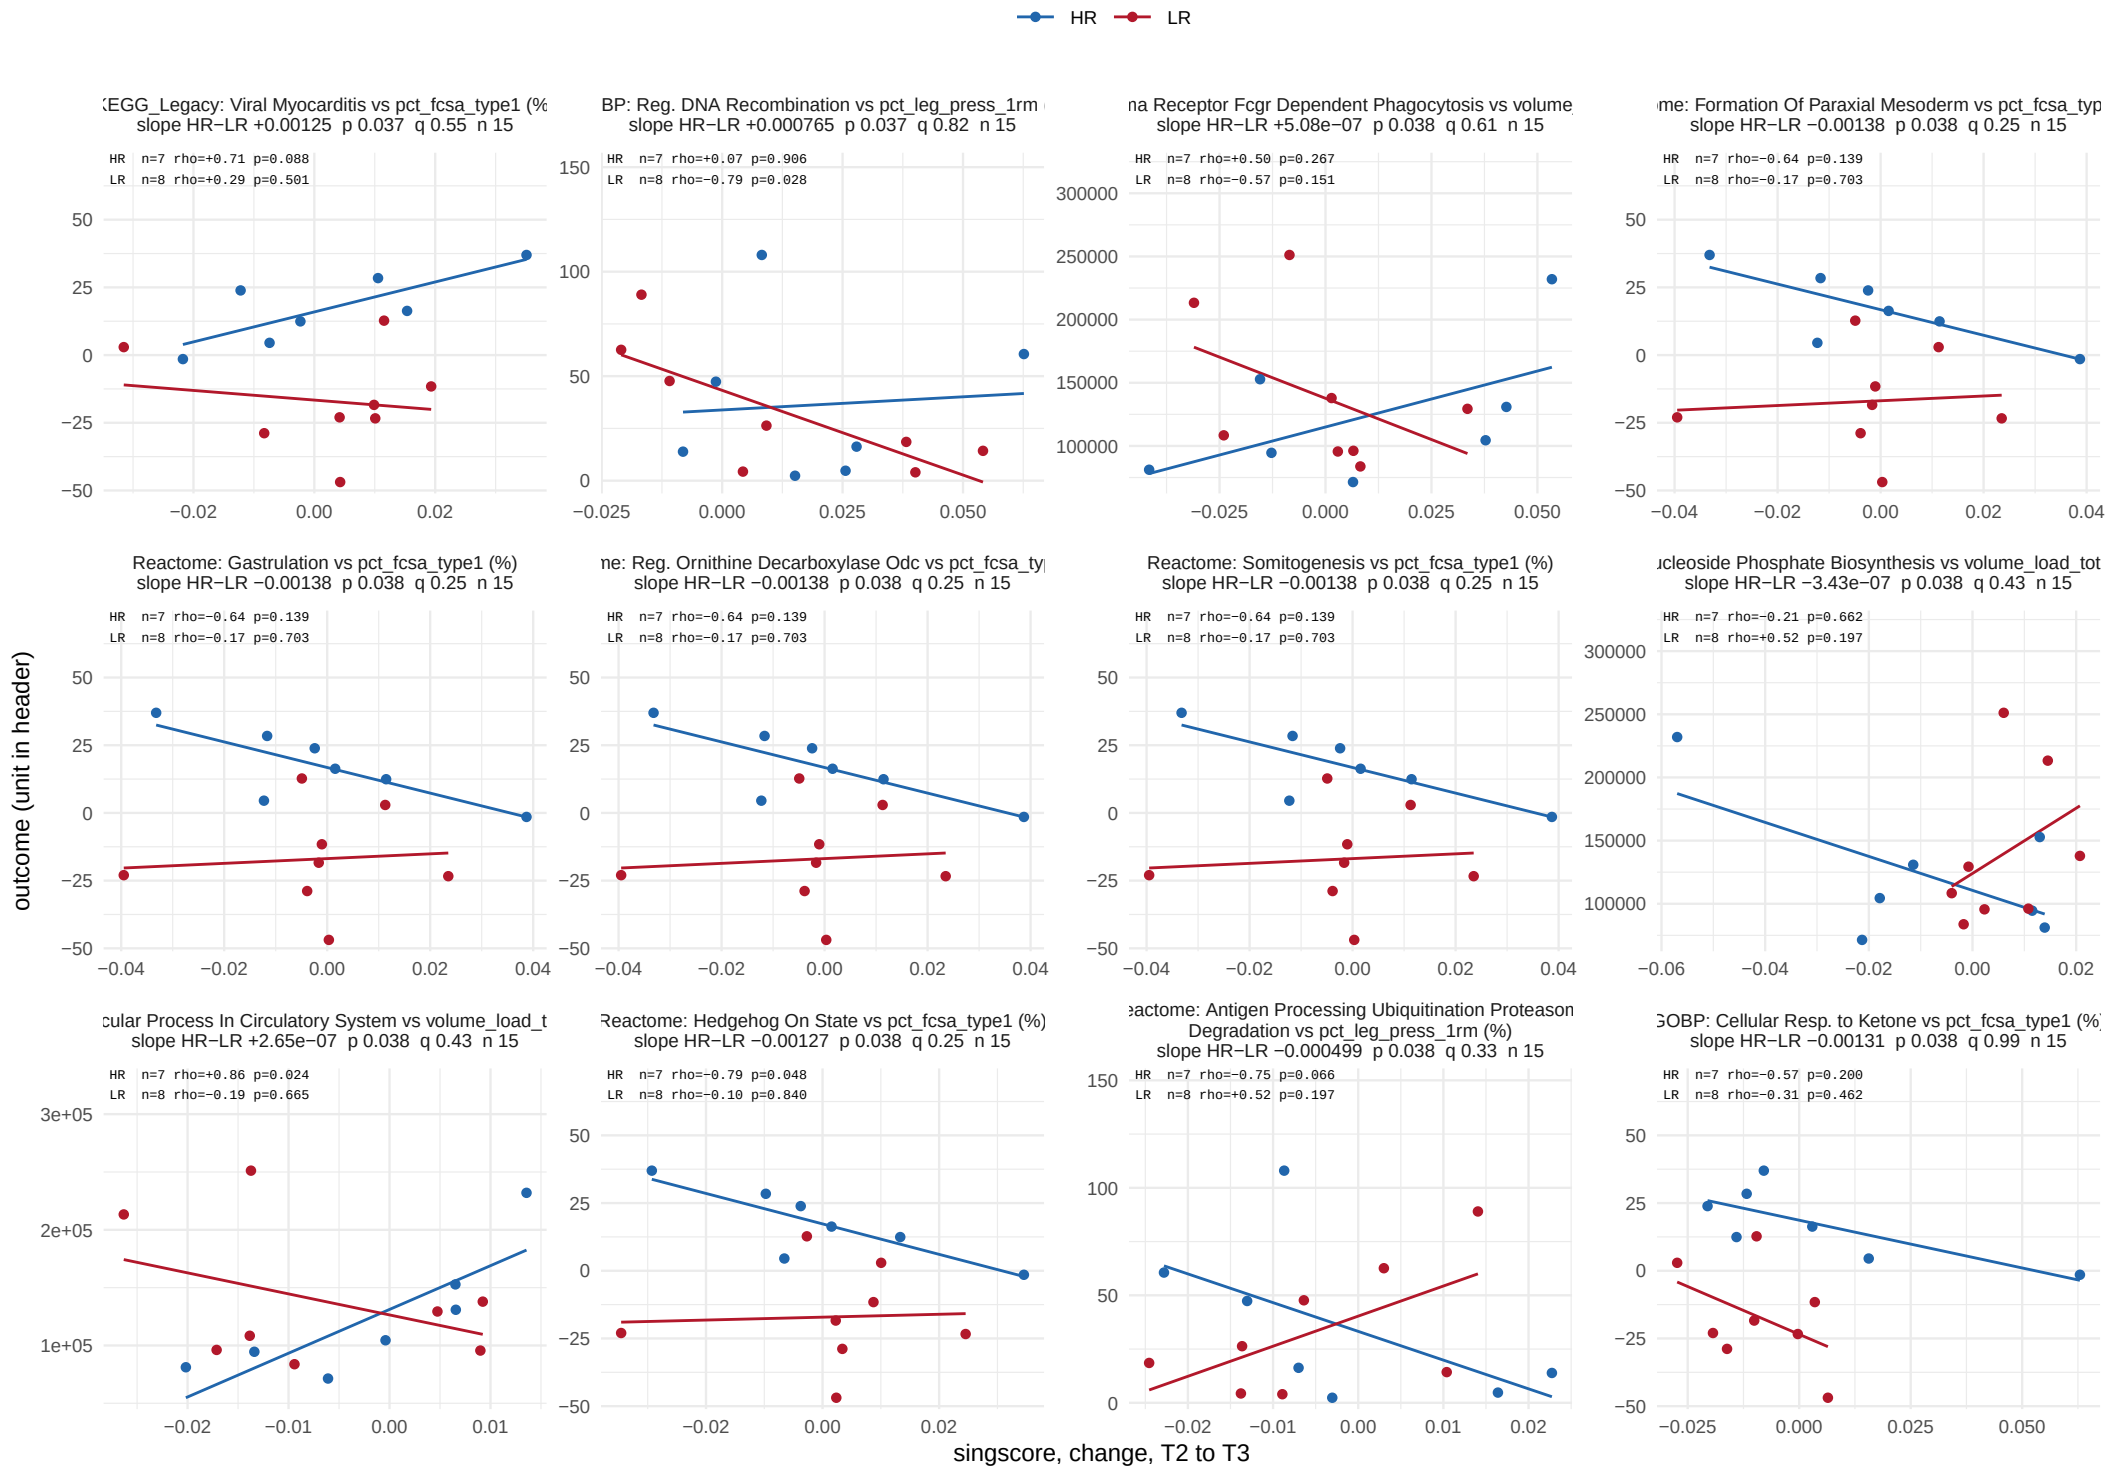

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, acute window


398 of 9646 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 25 of 34.

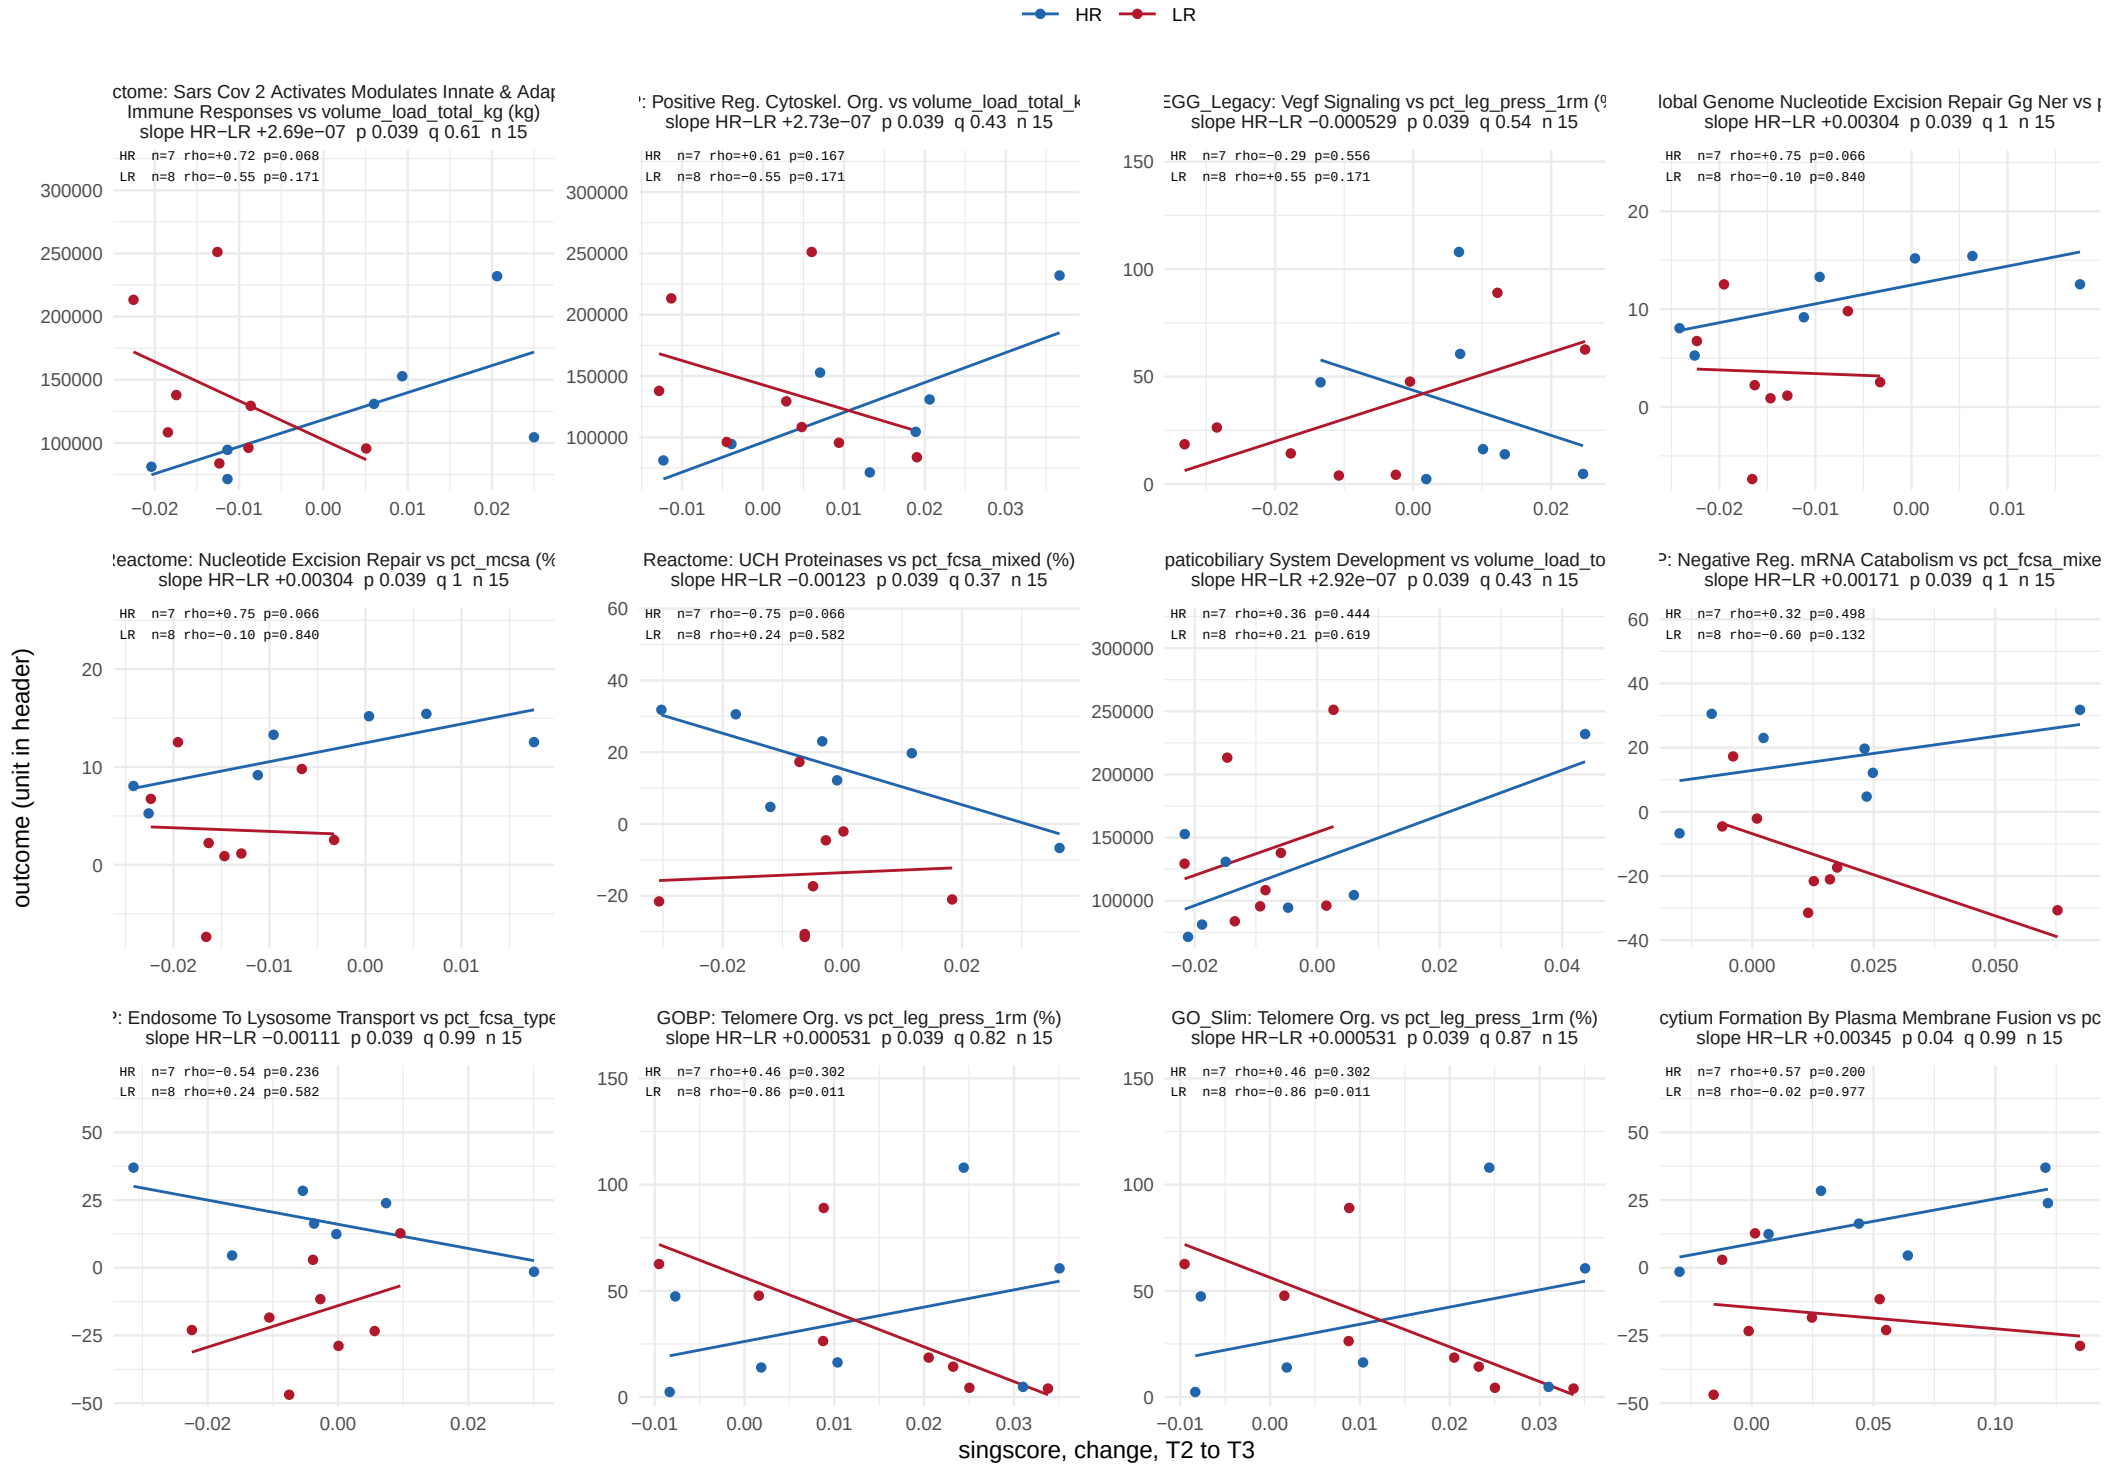

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, acute window


398 of 9646 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 26 of 34.

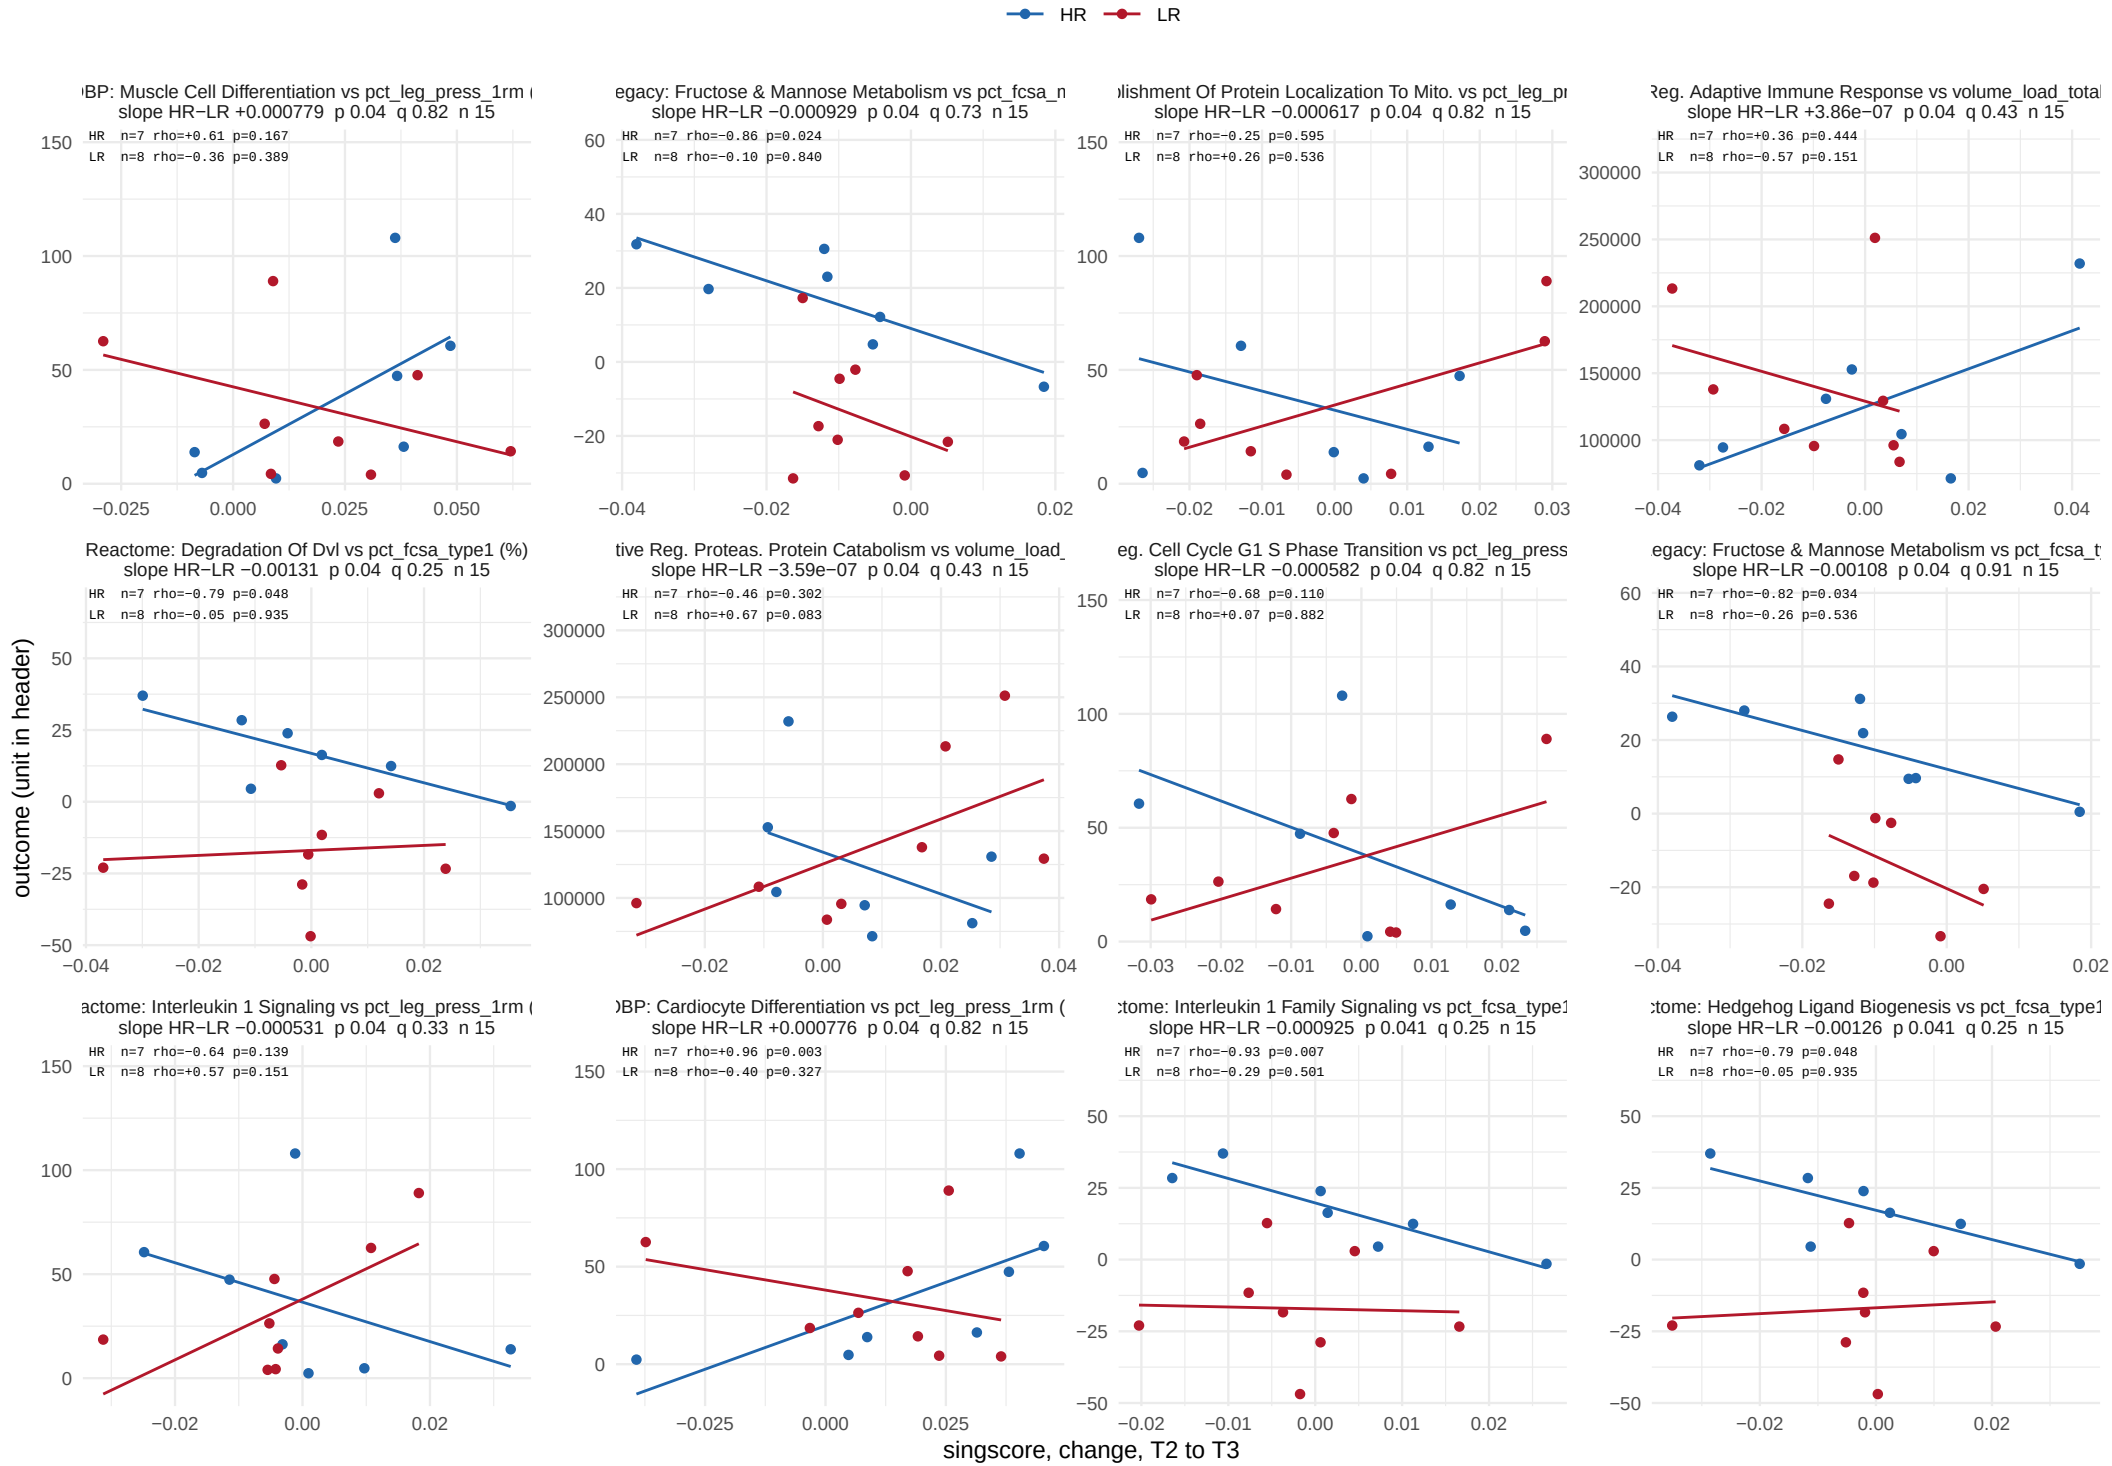

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, acute window


398 of 9646 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 27 of 34.

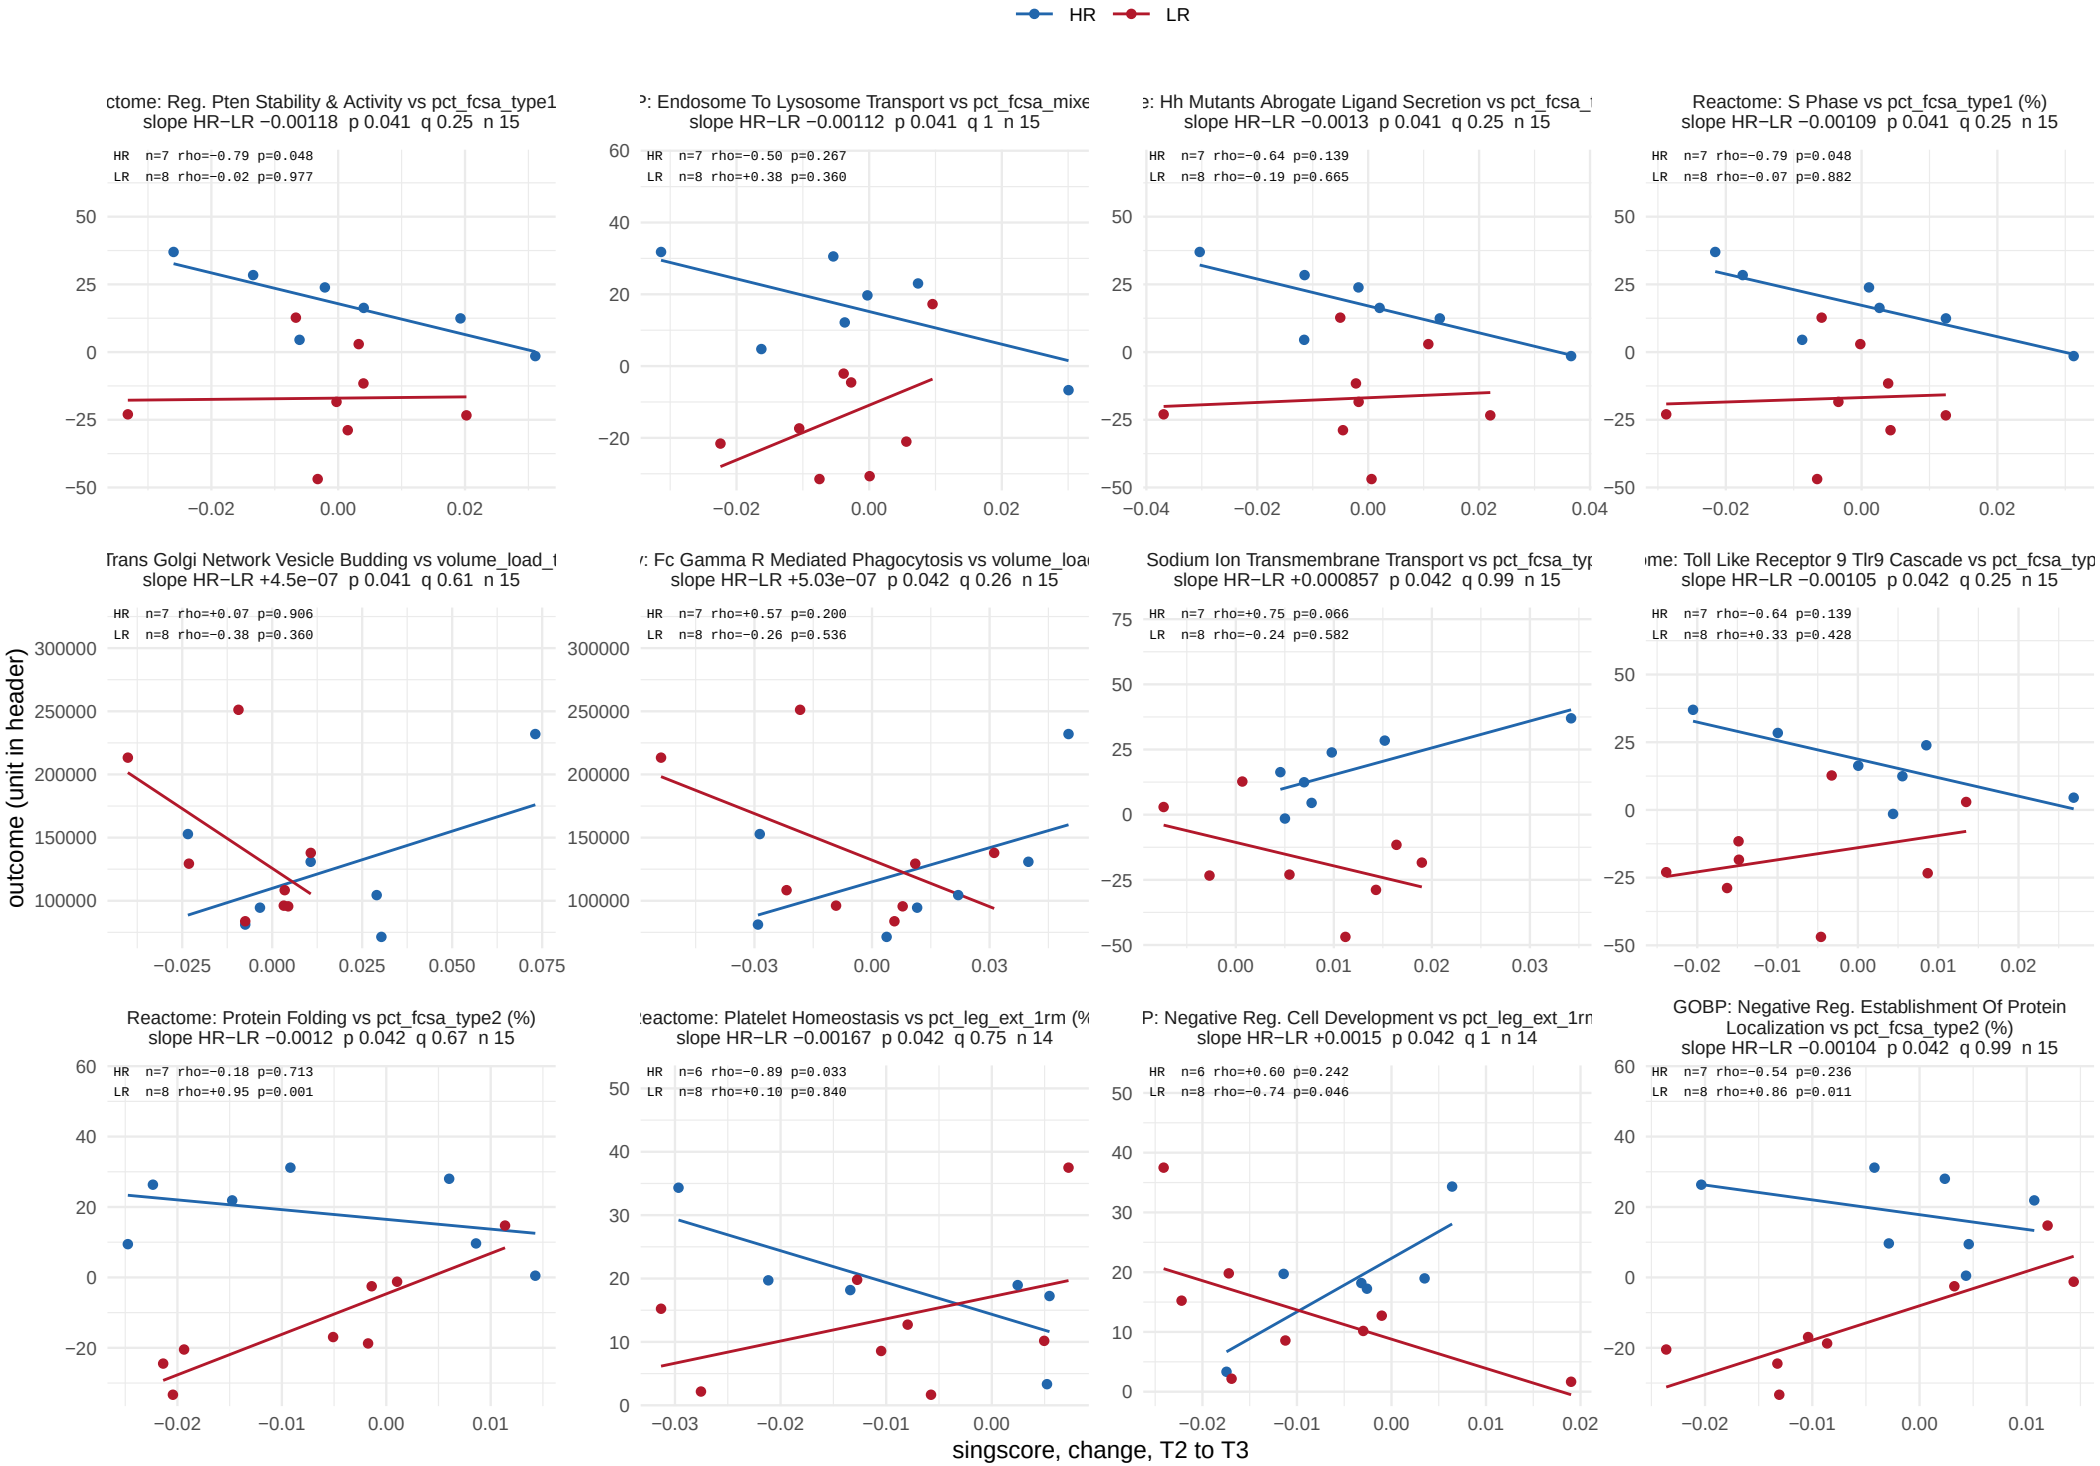

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, acute window


398 of 9646 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 28 of 34.

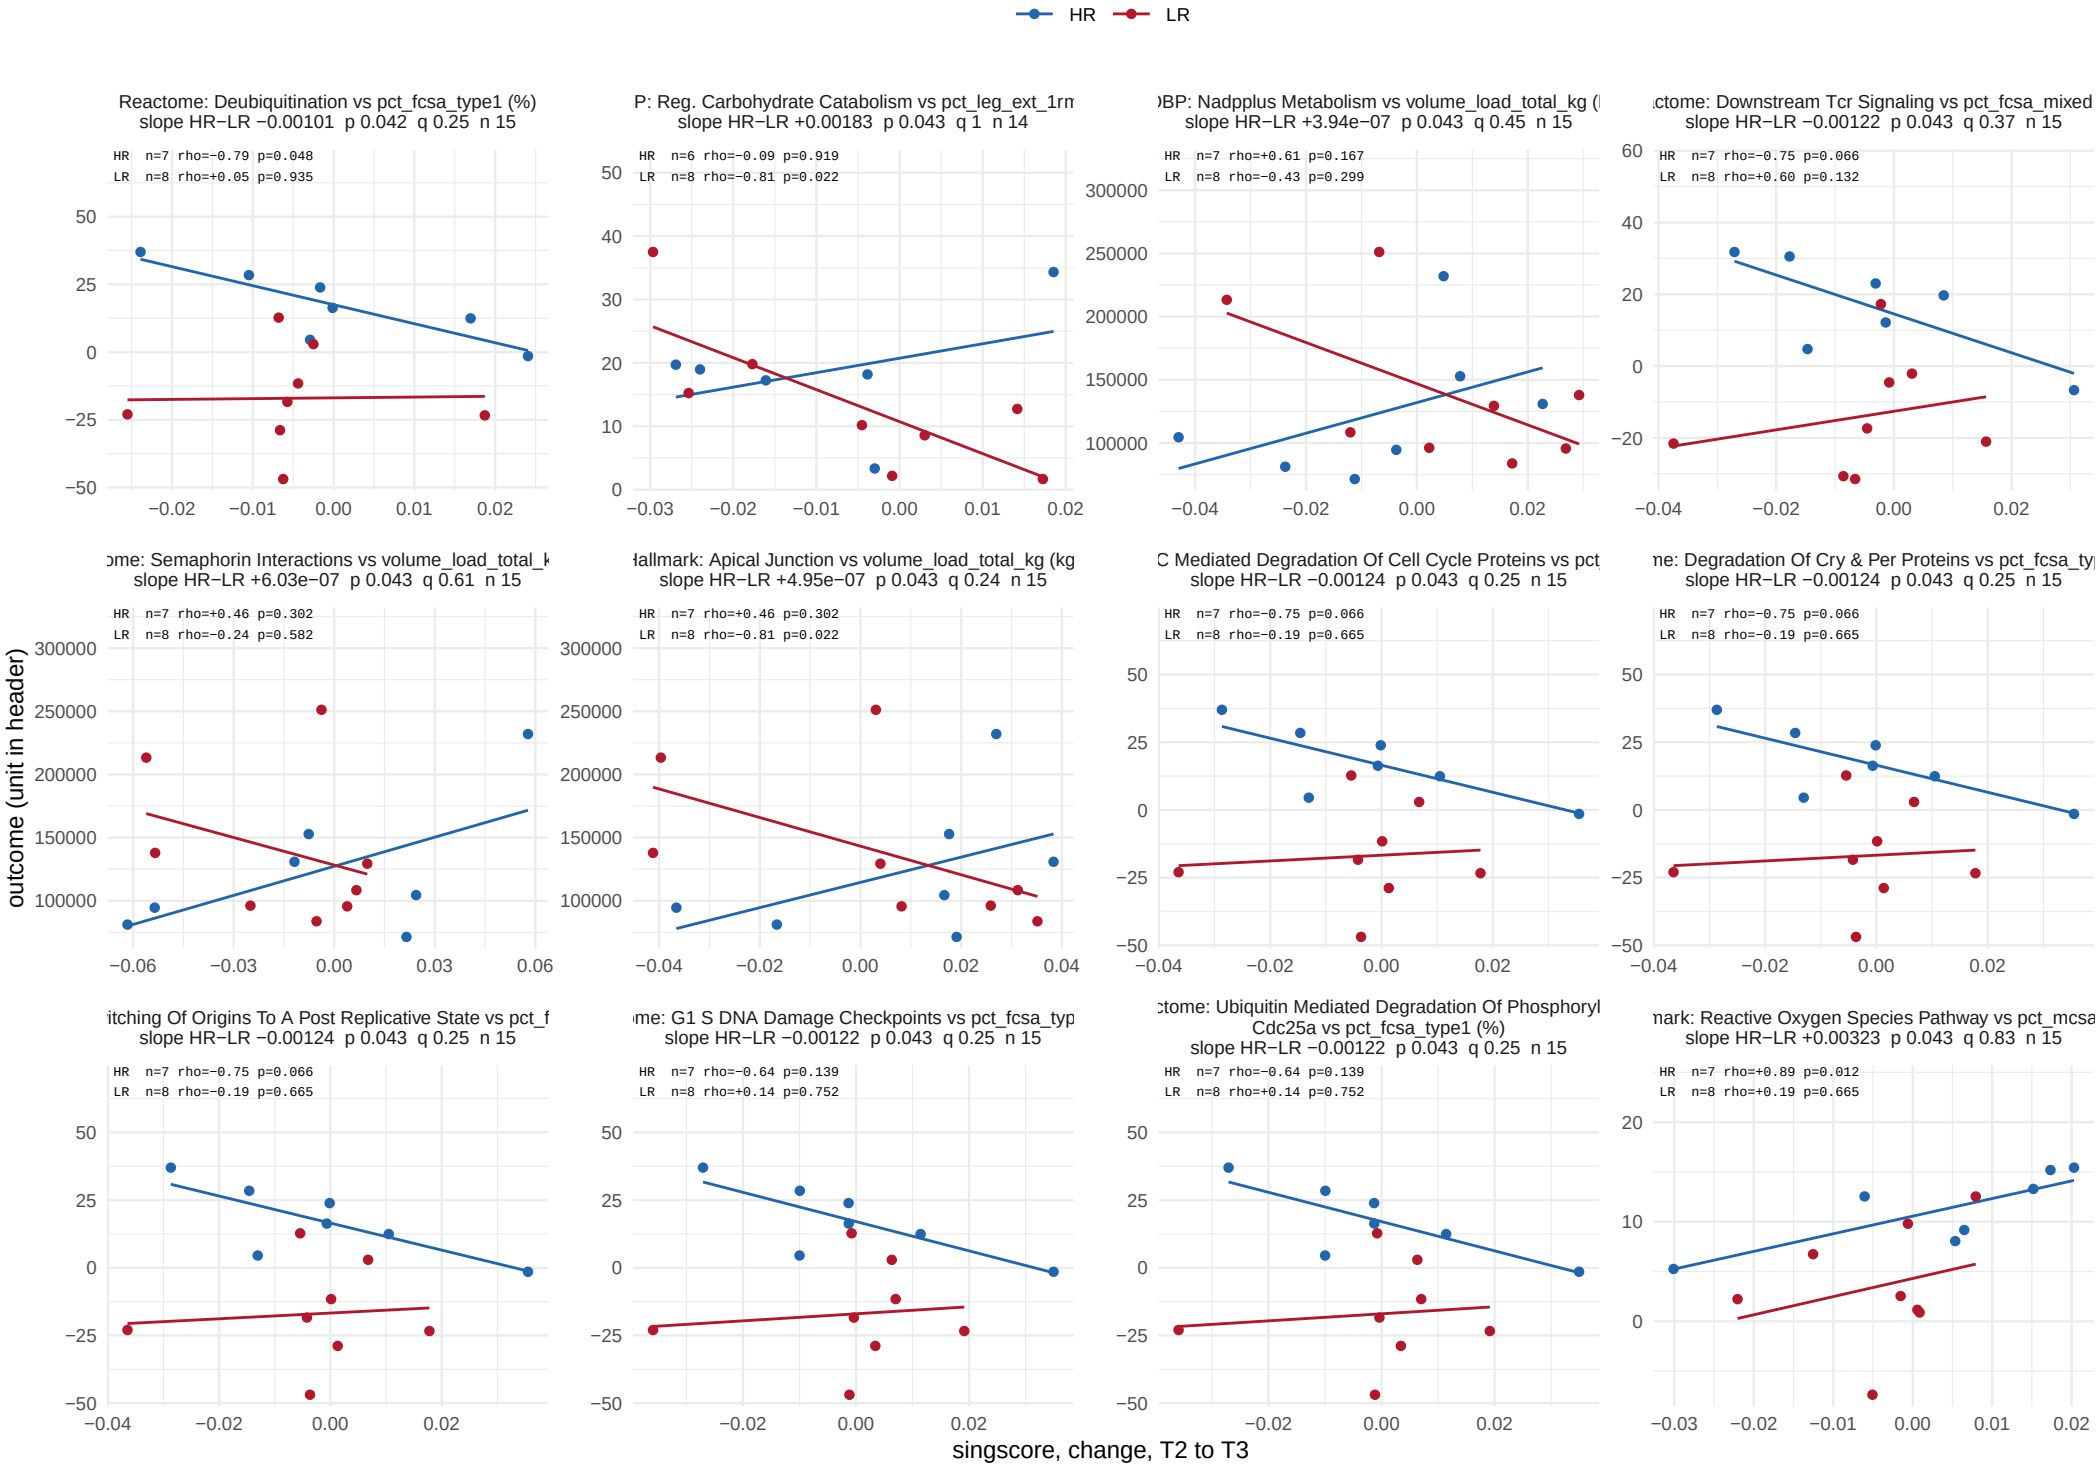

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, acute window


398 of 9646 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 29 of 34.

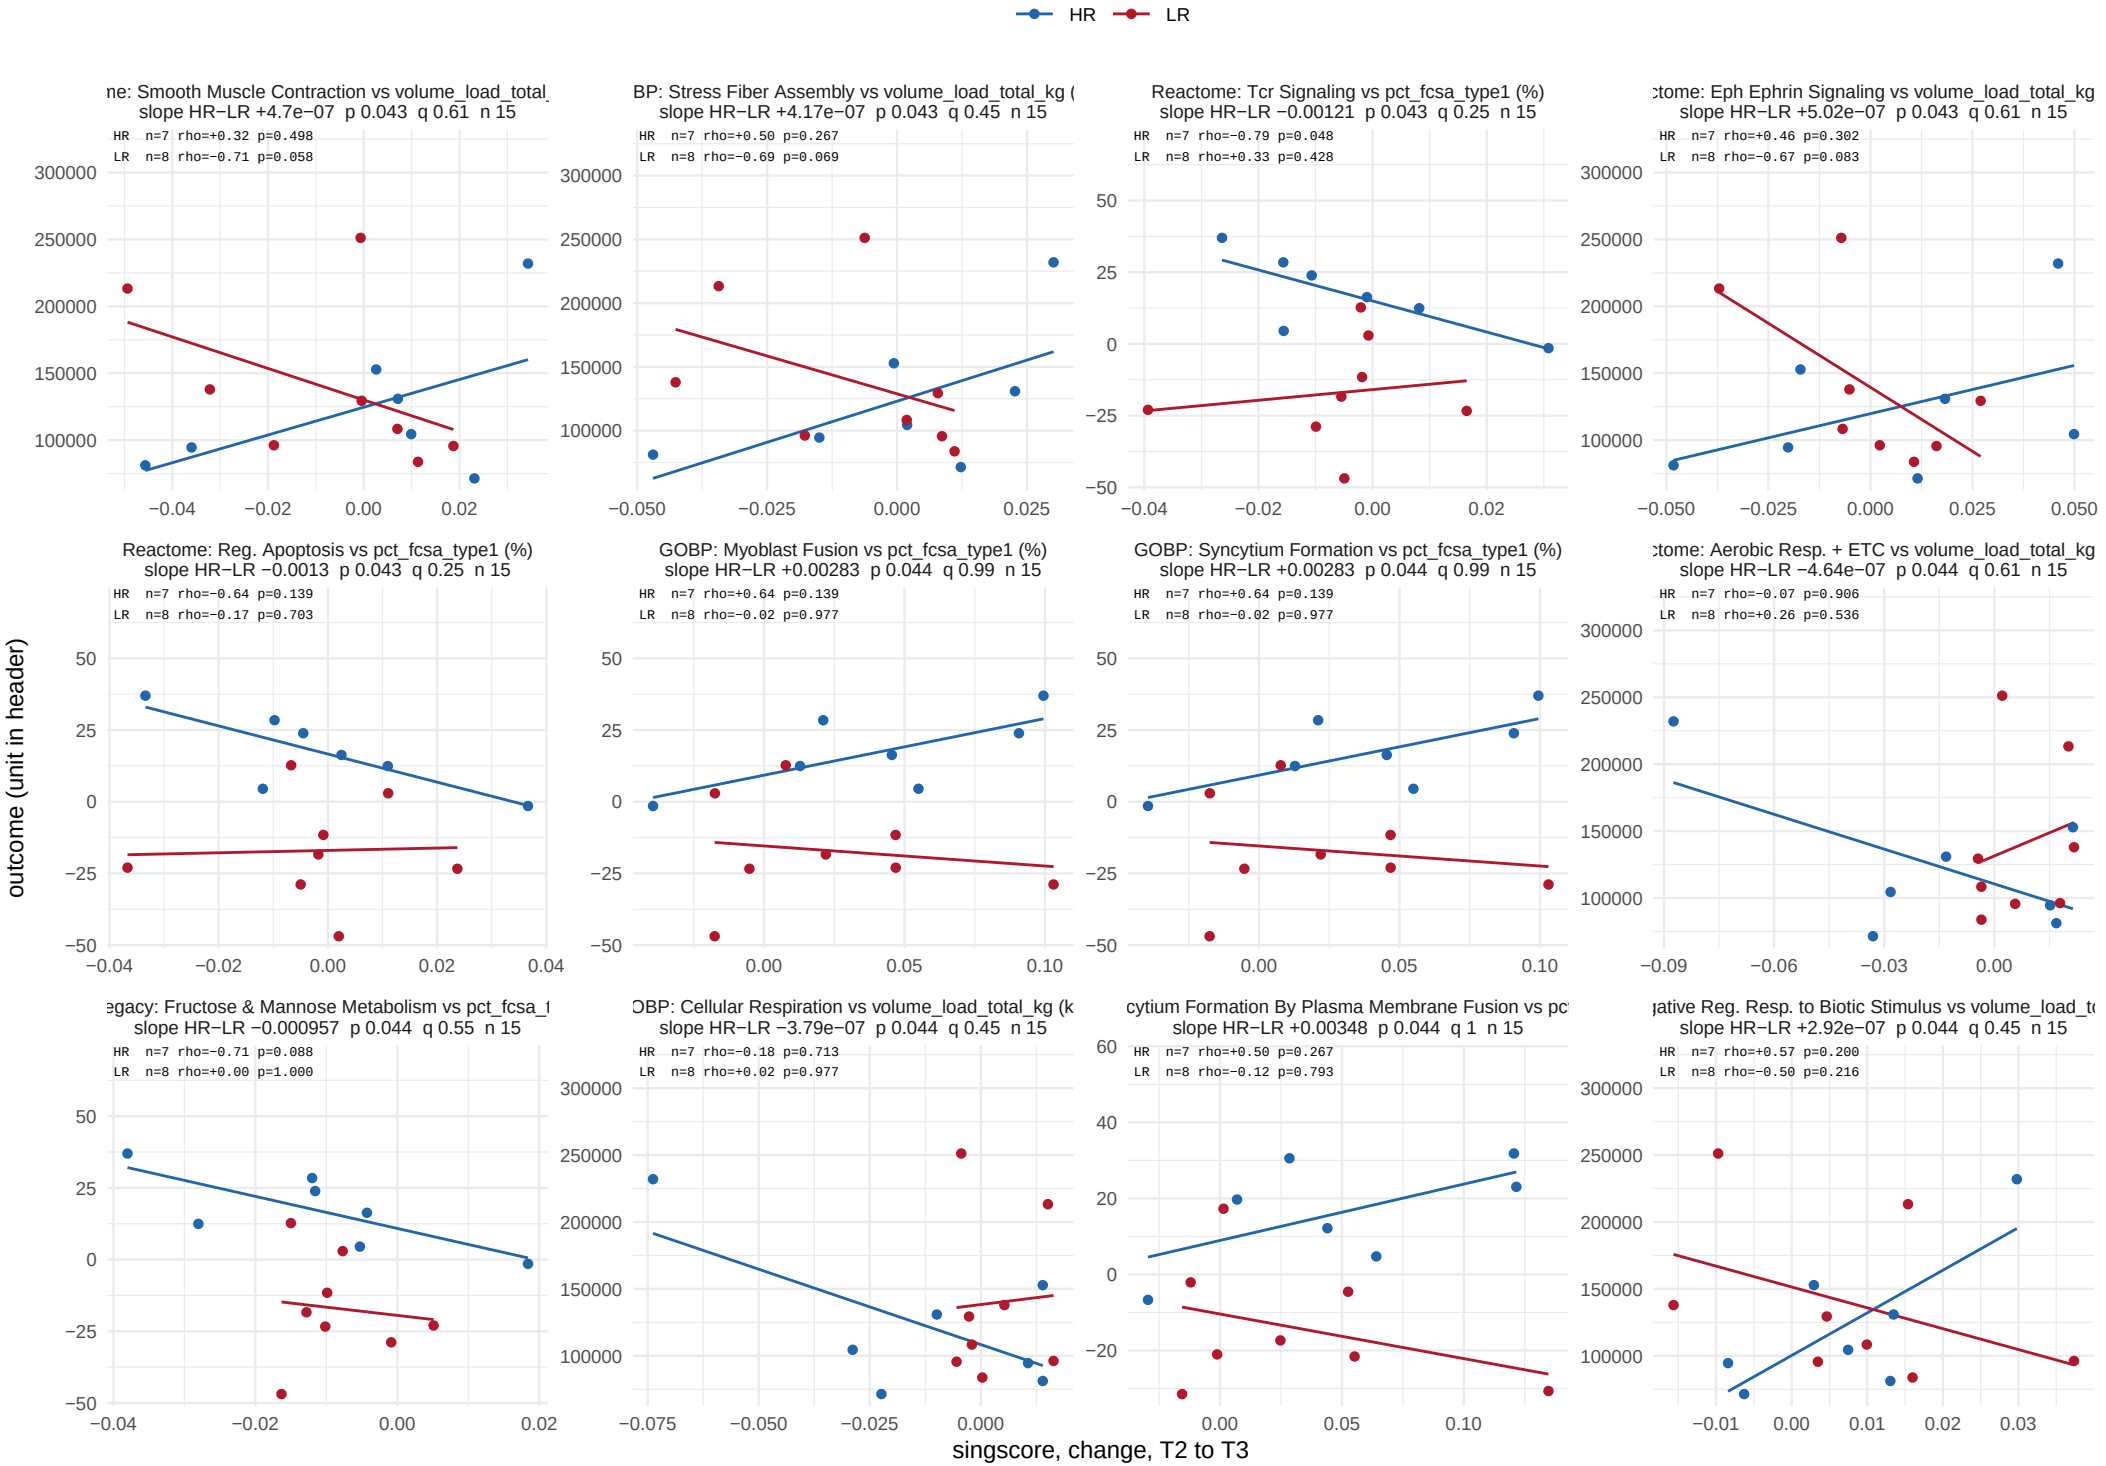

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, acute window


398 of 9646 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 30 of 34.

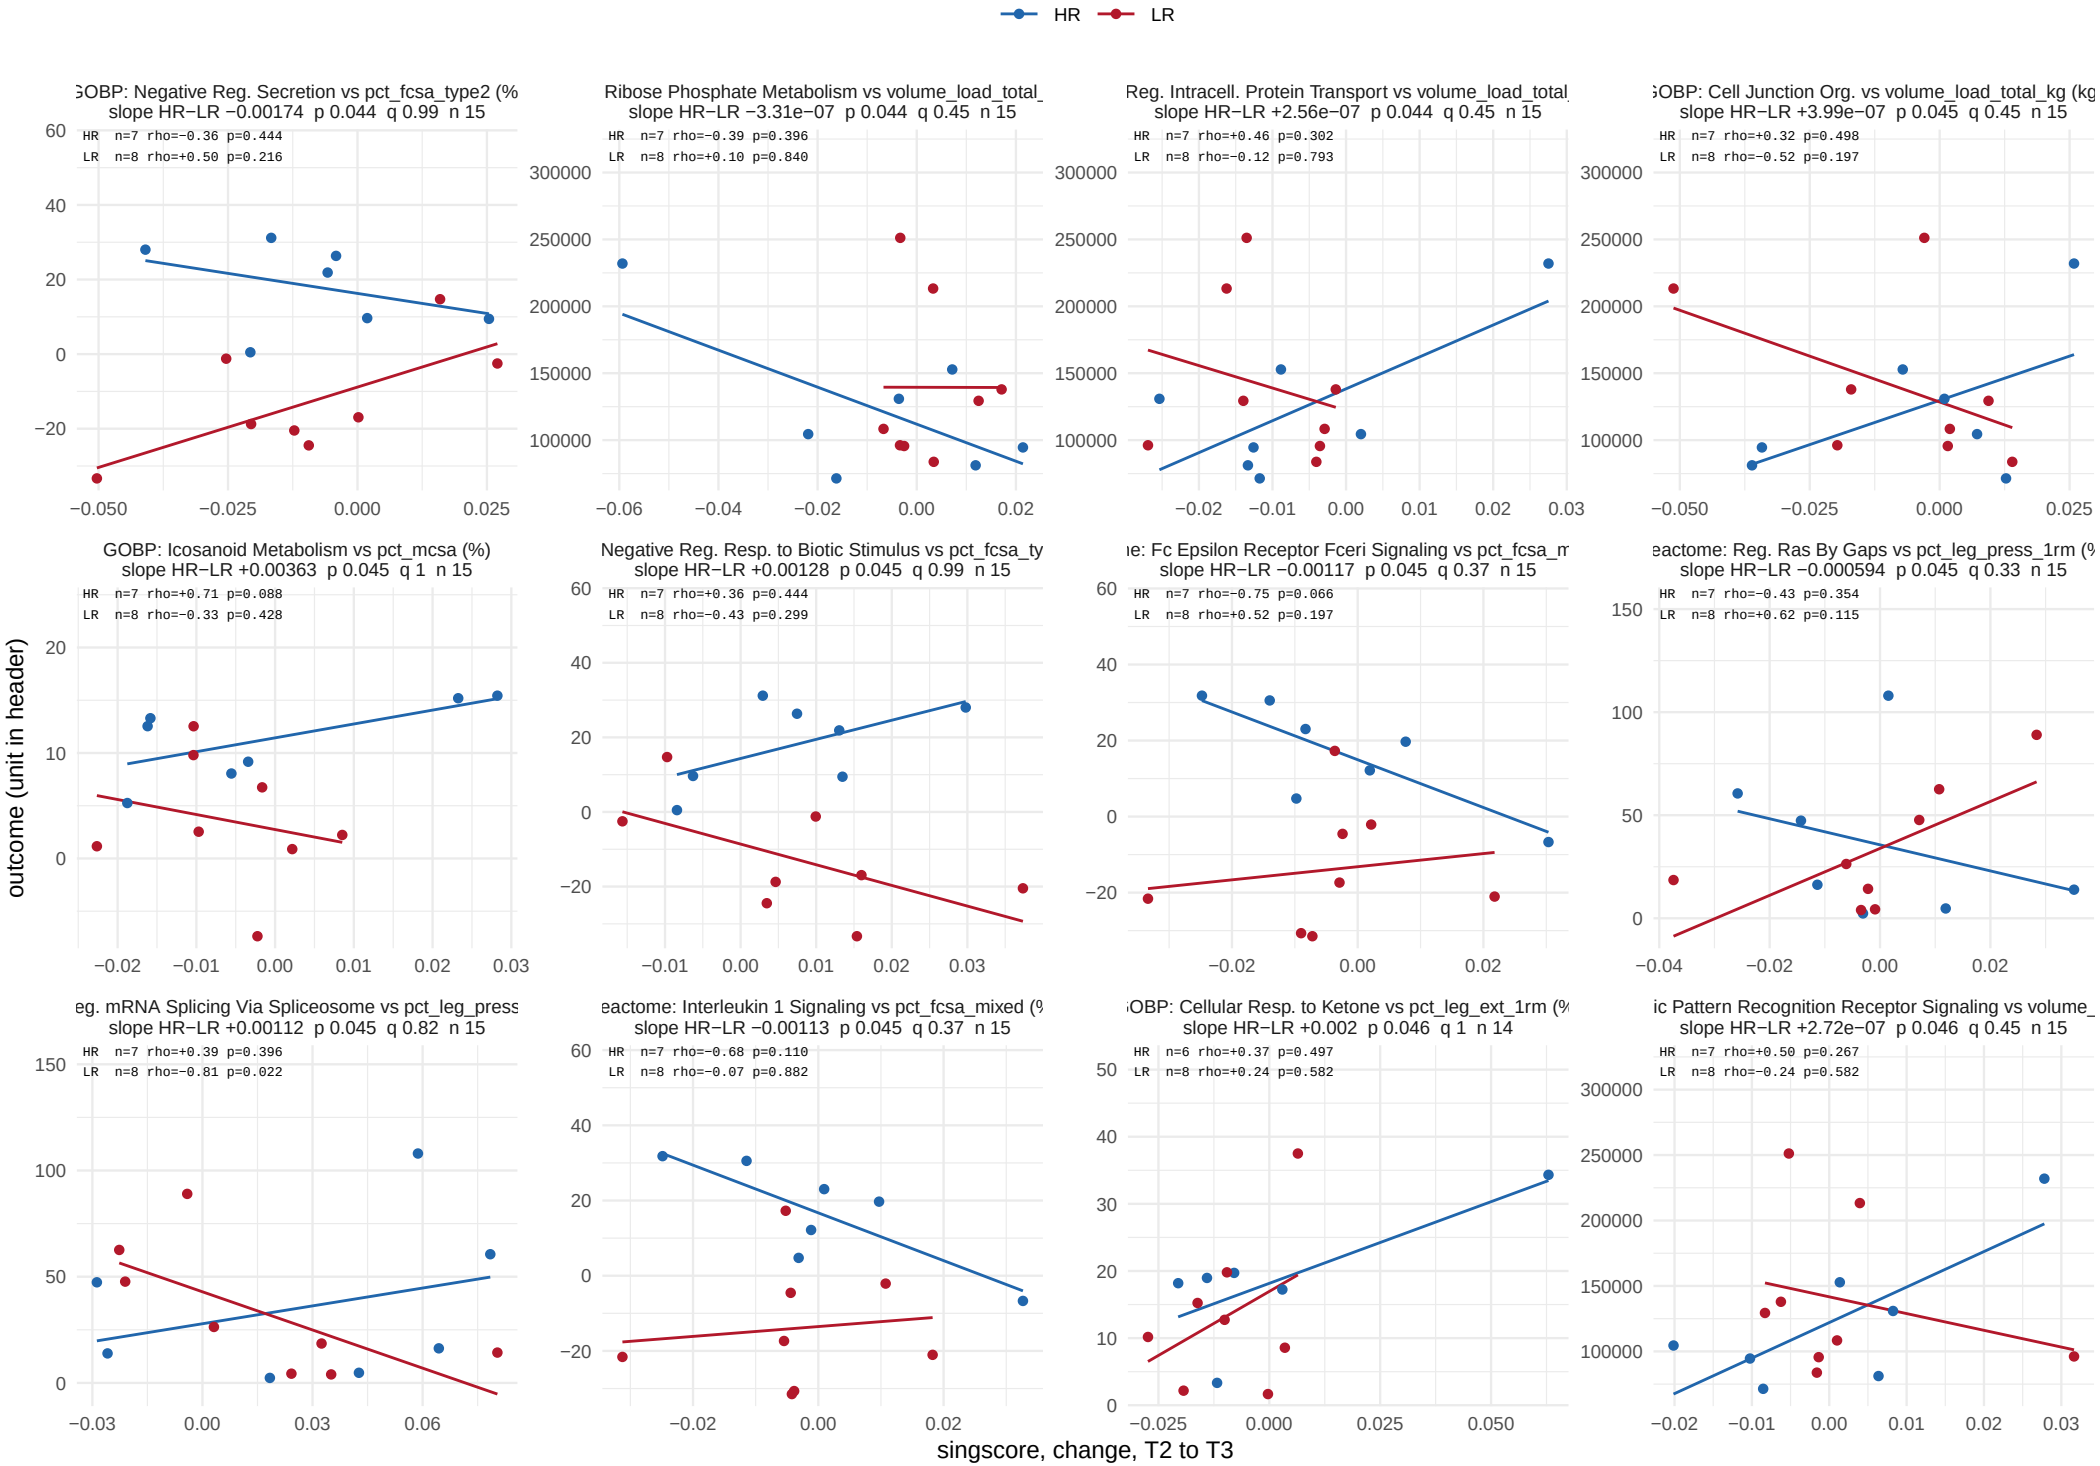

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, acute window


398 of 9646 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 31 of 34.

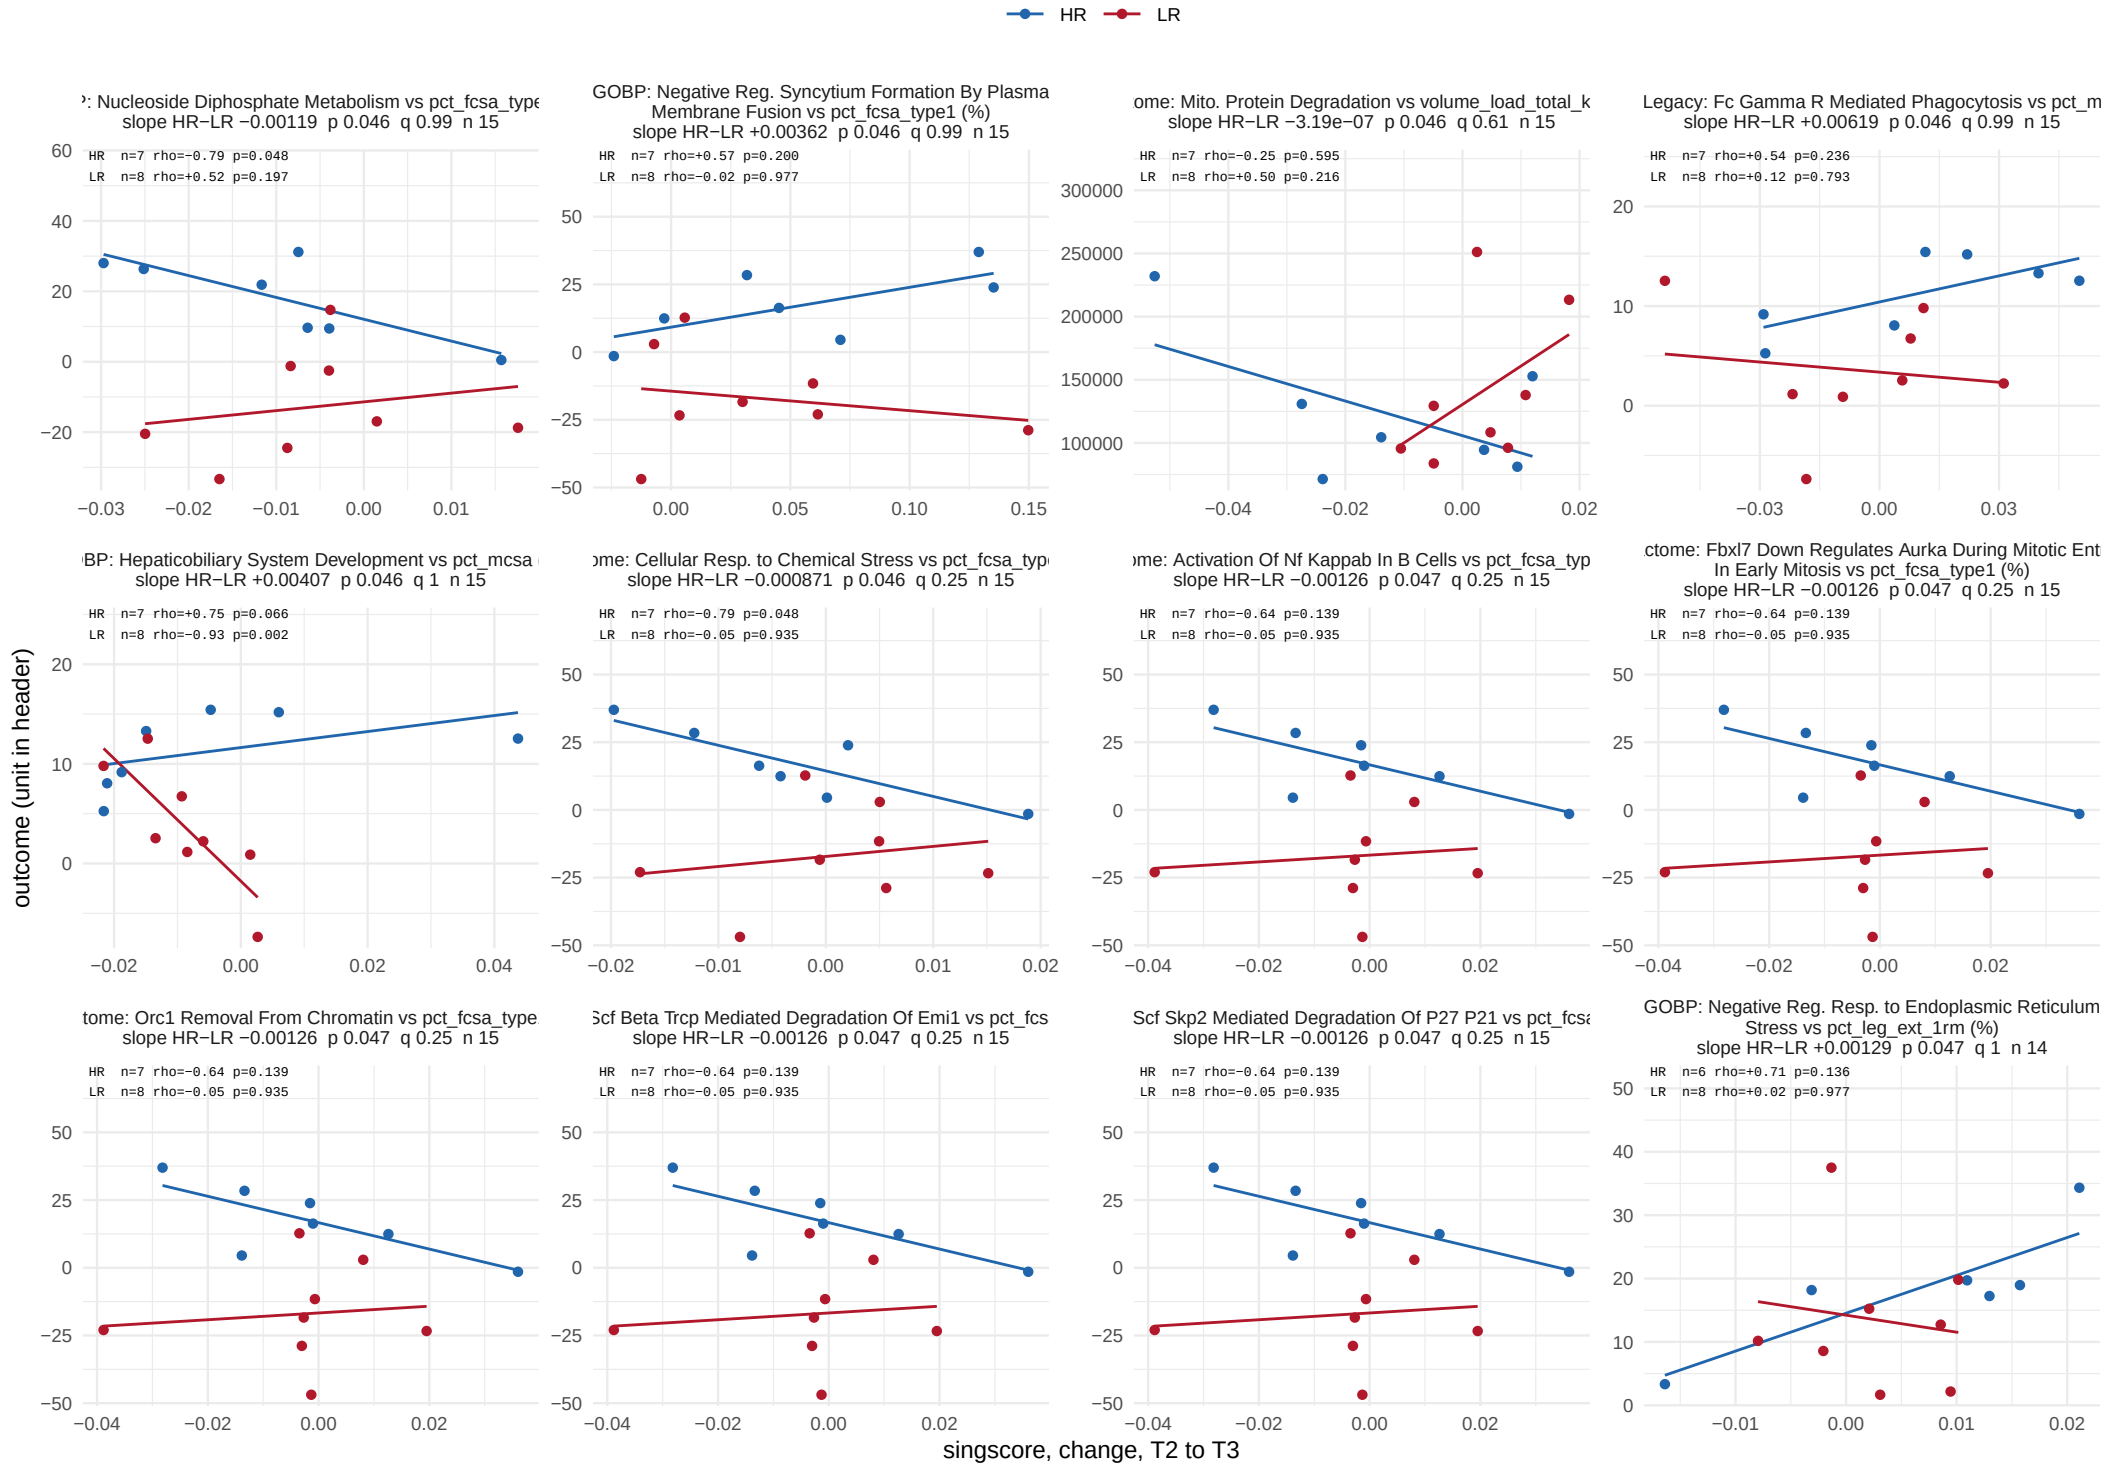

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, acute window


398 of 9646 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 32 of 34.

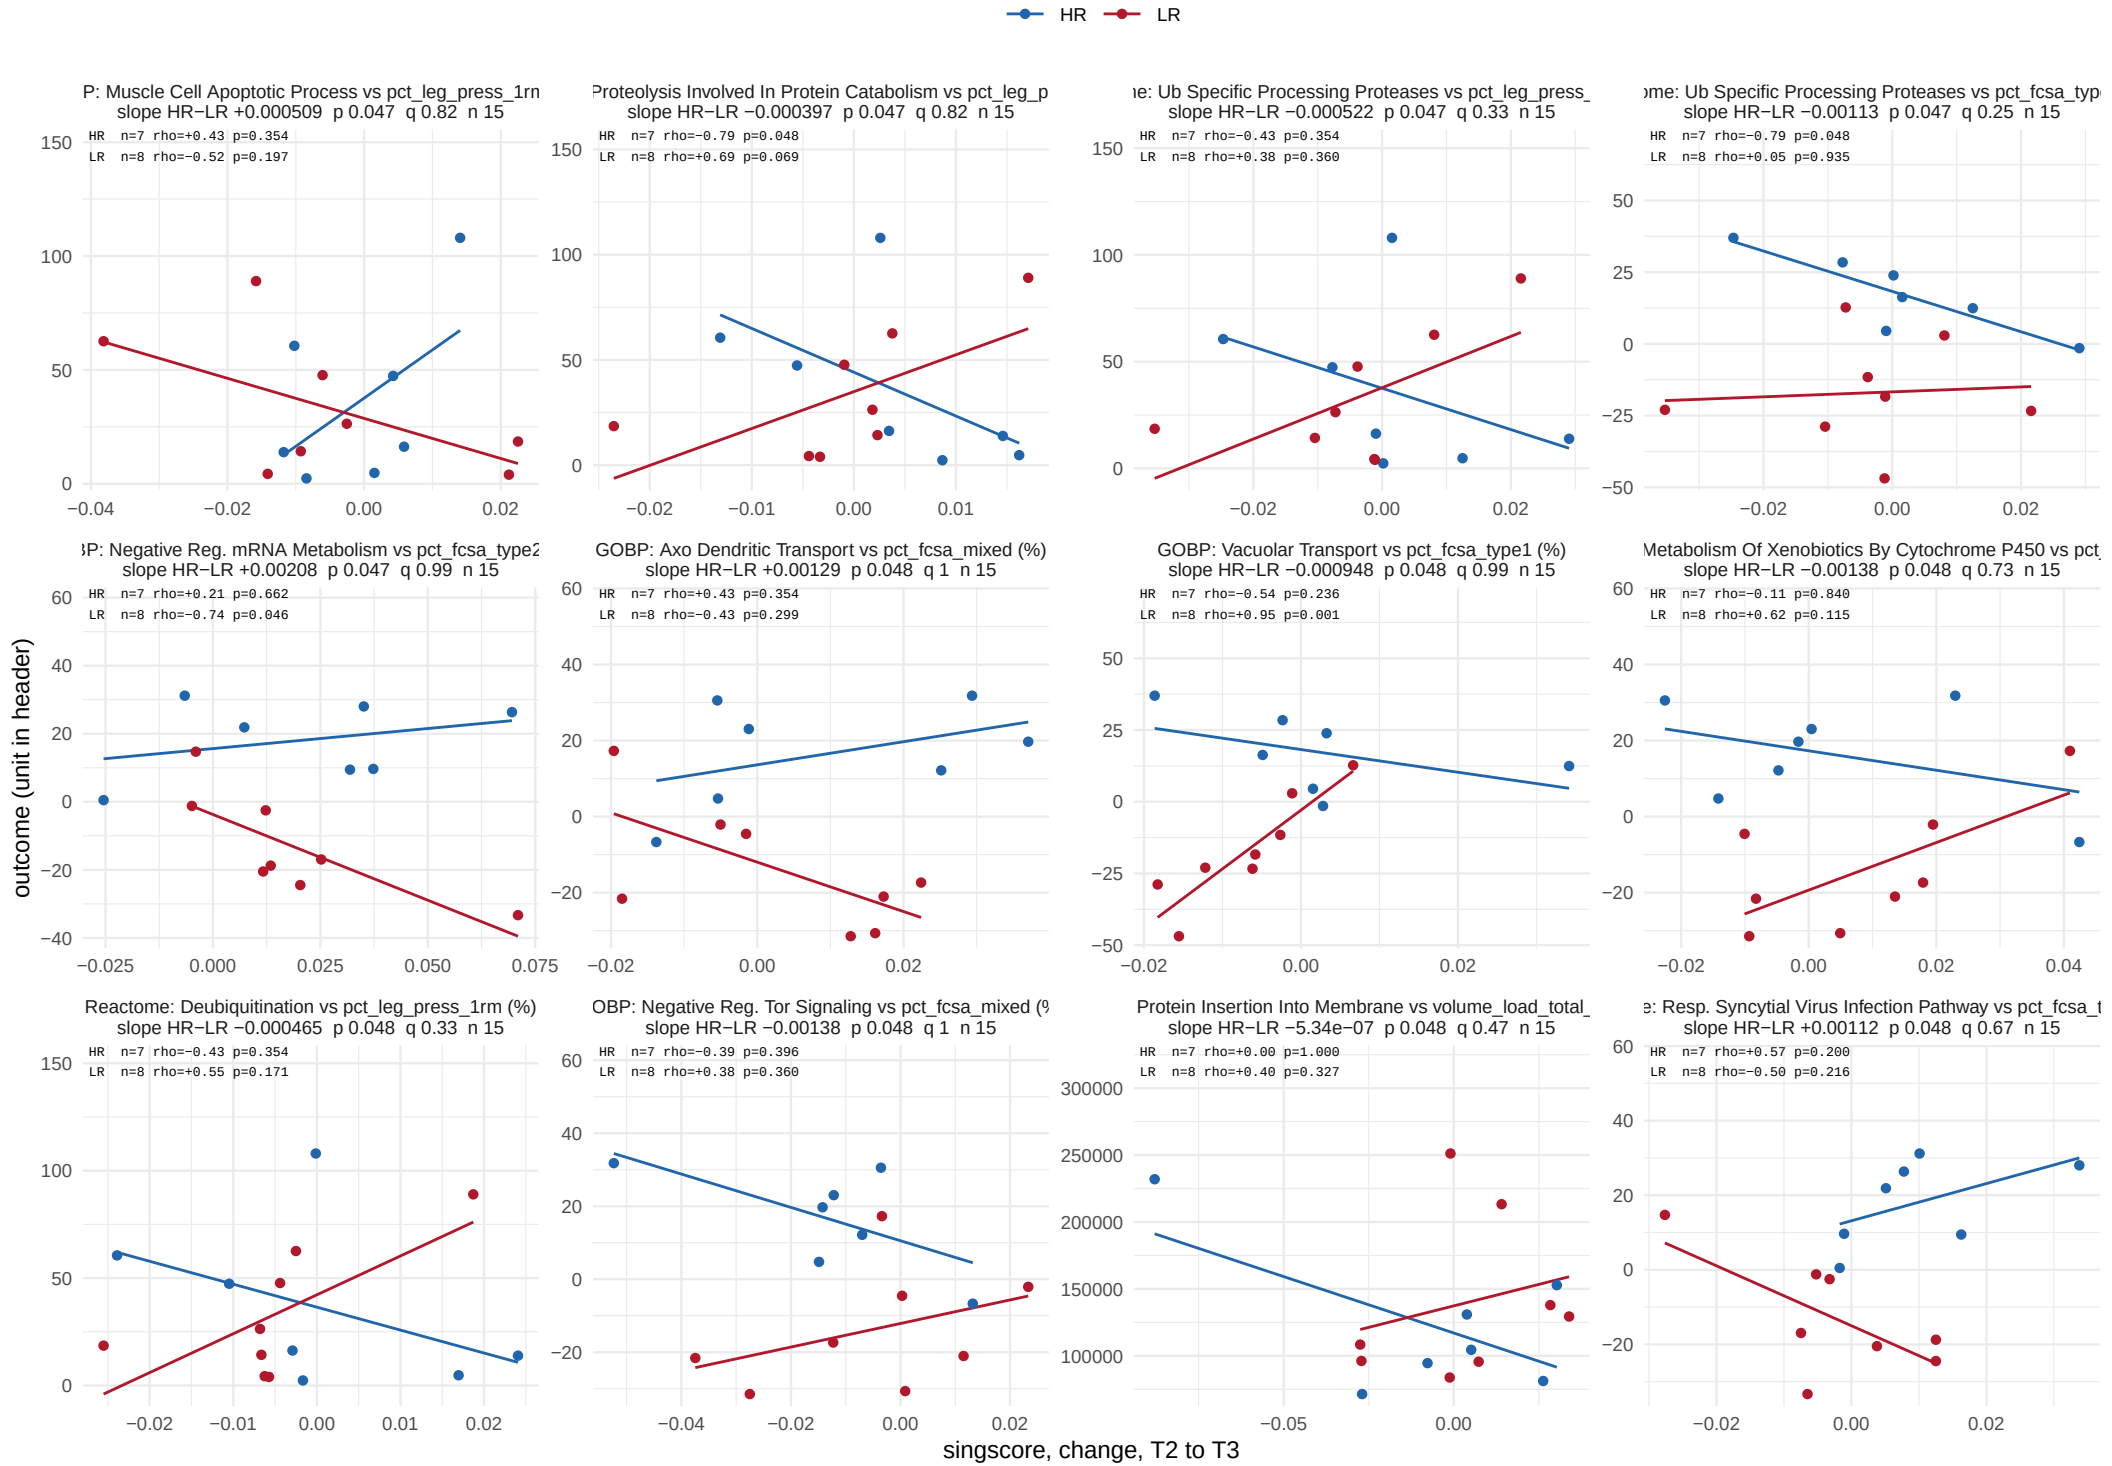

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, acute window


398 of 9646 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 33 of 34.

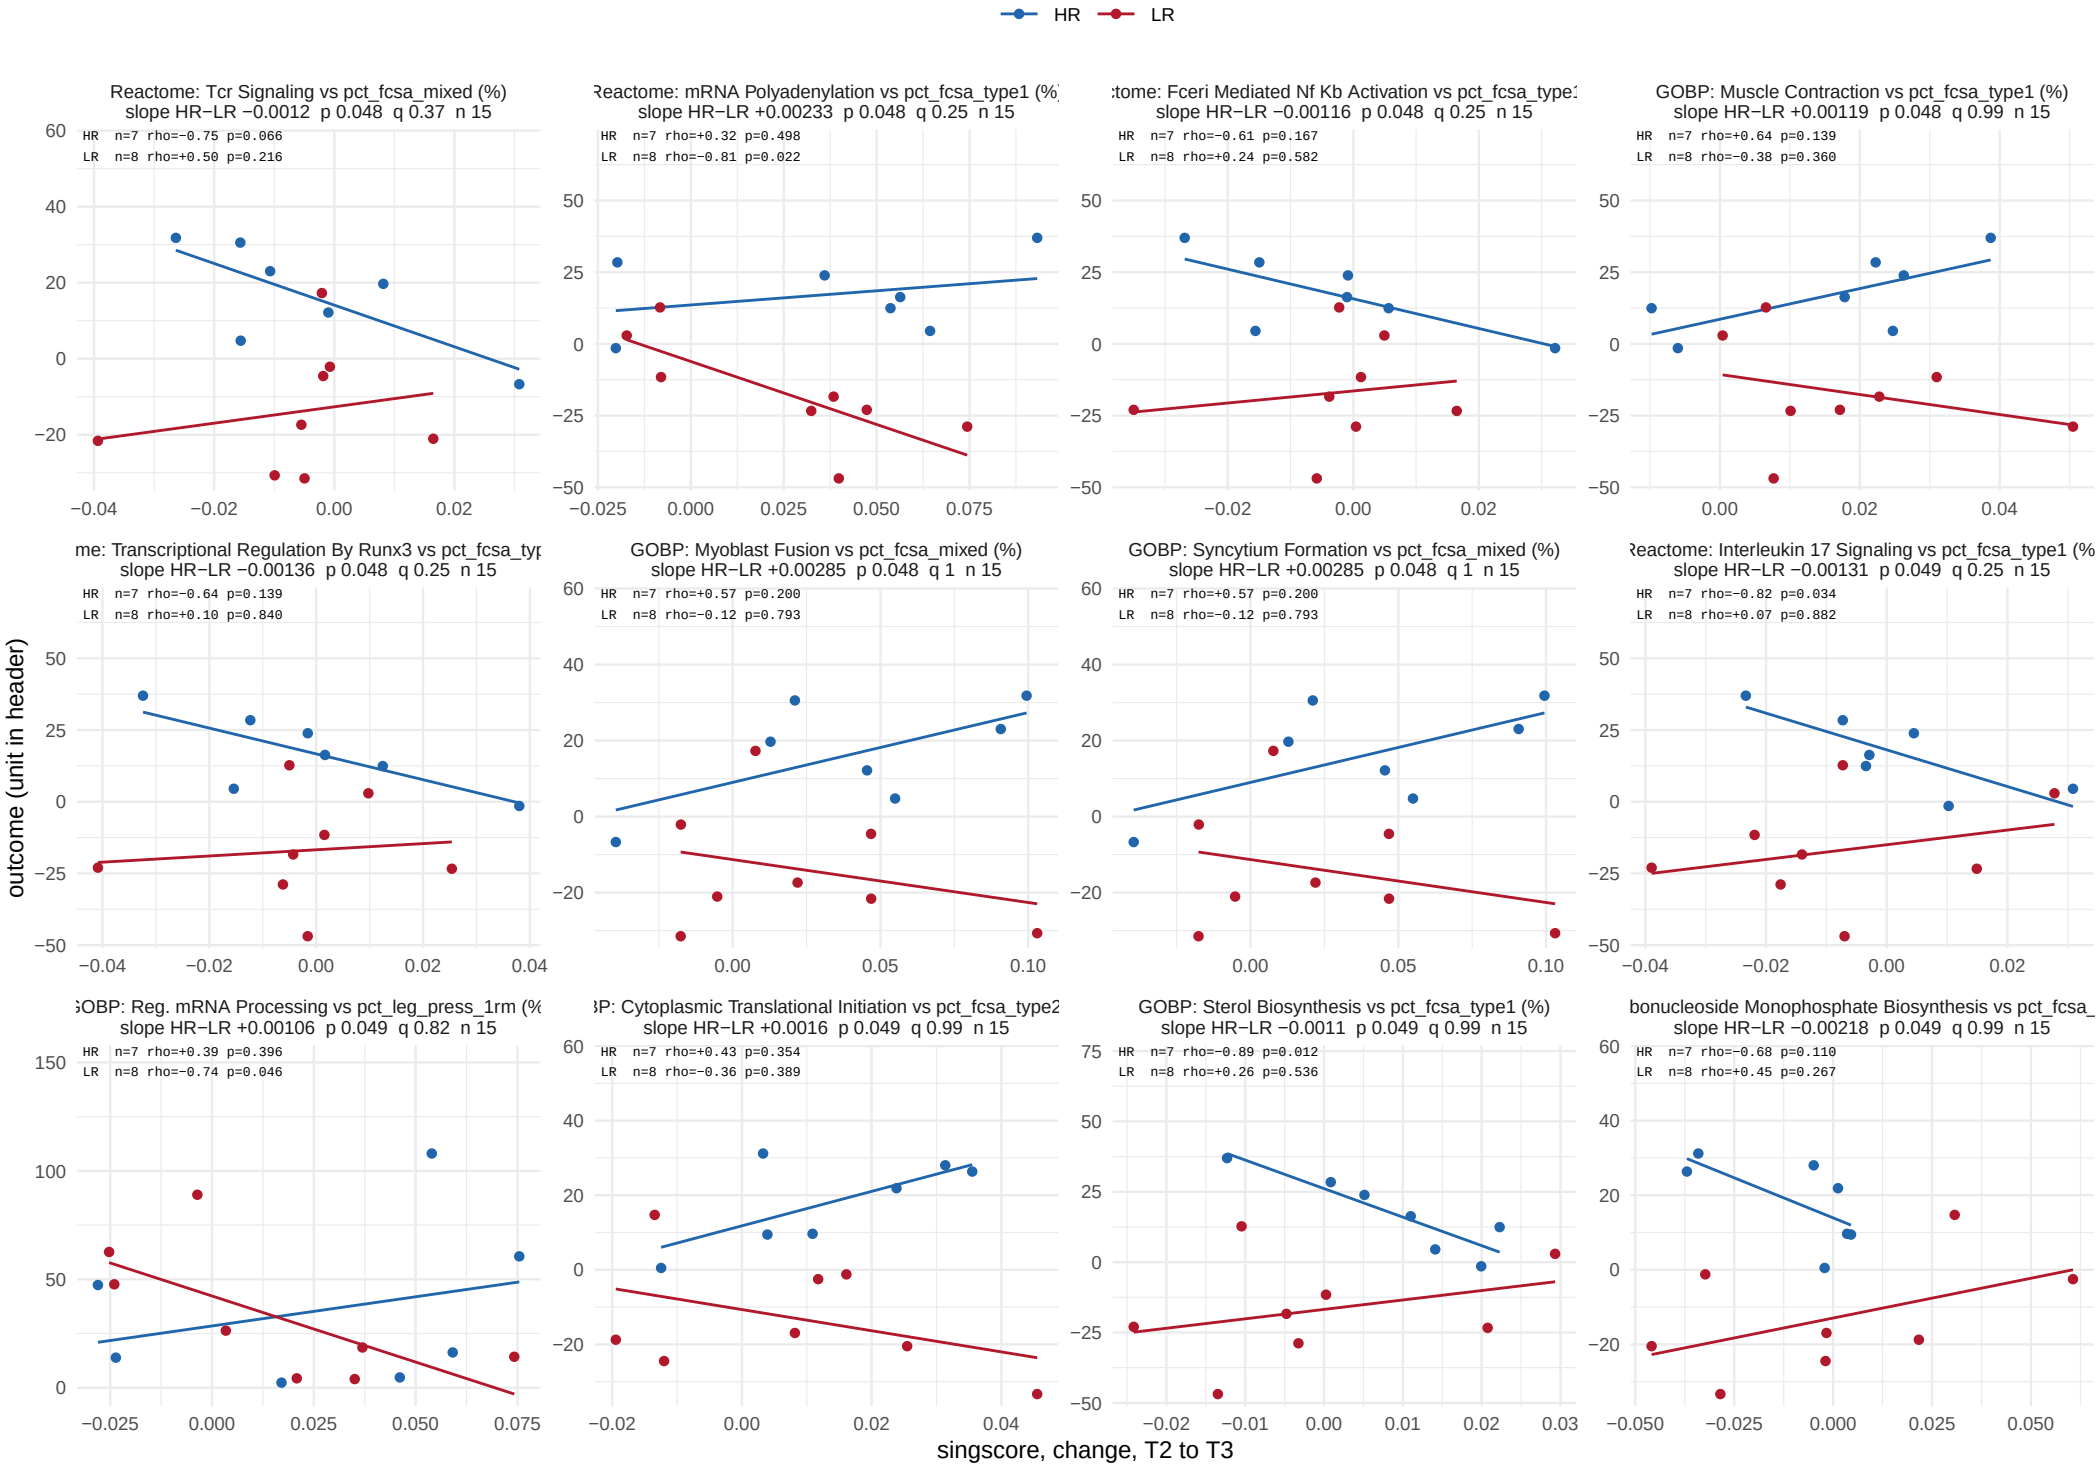

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Arm difference, acute window

398 of 9646 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 34 of 34.

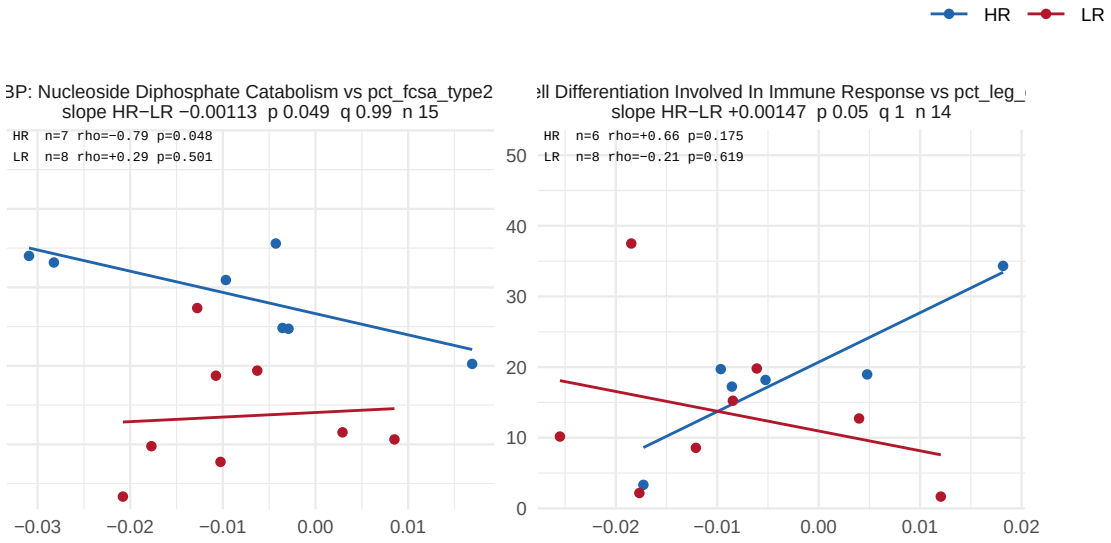


outcome (unit in header)

singscore, change, T2 to T3

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, arm_difference.

Two predictor, training window


169 of 5512 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 1 of 15.

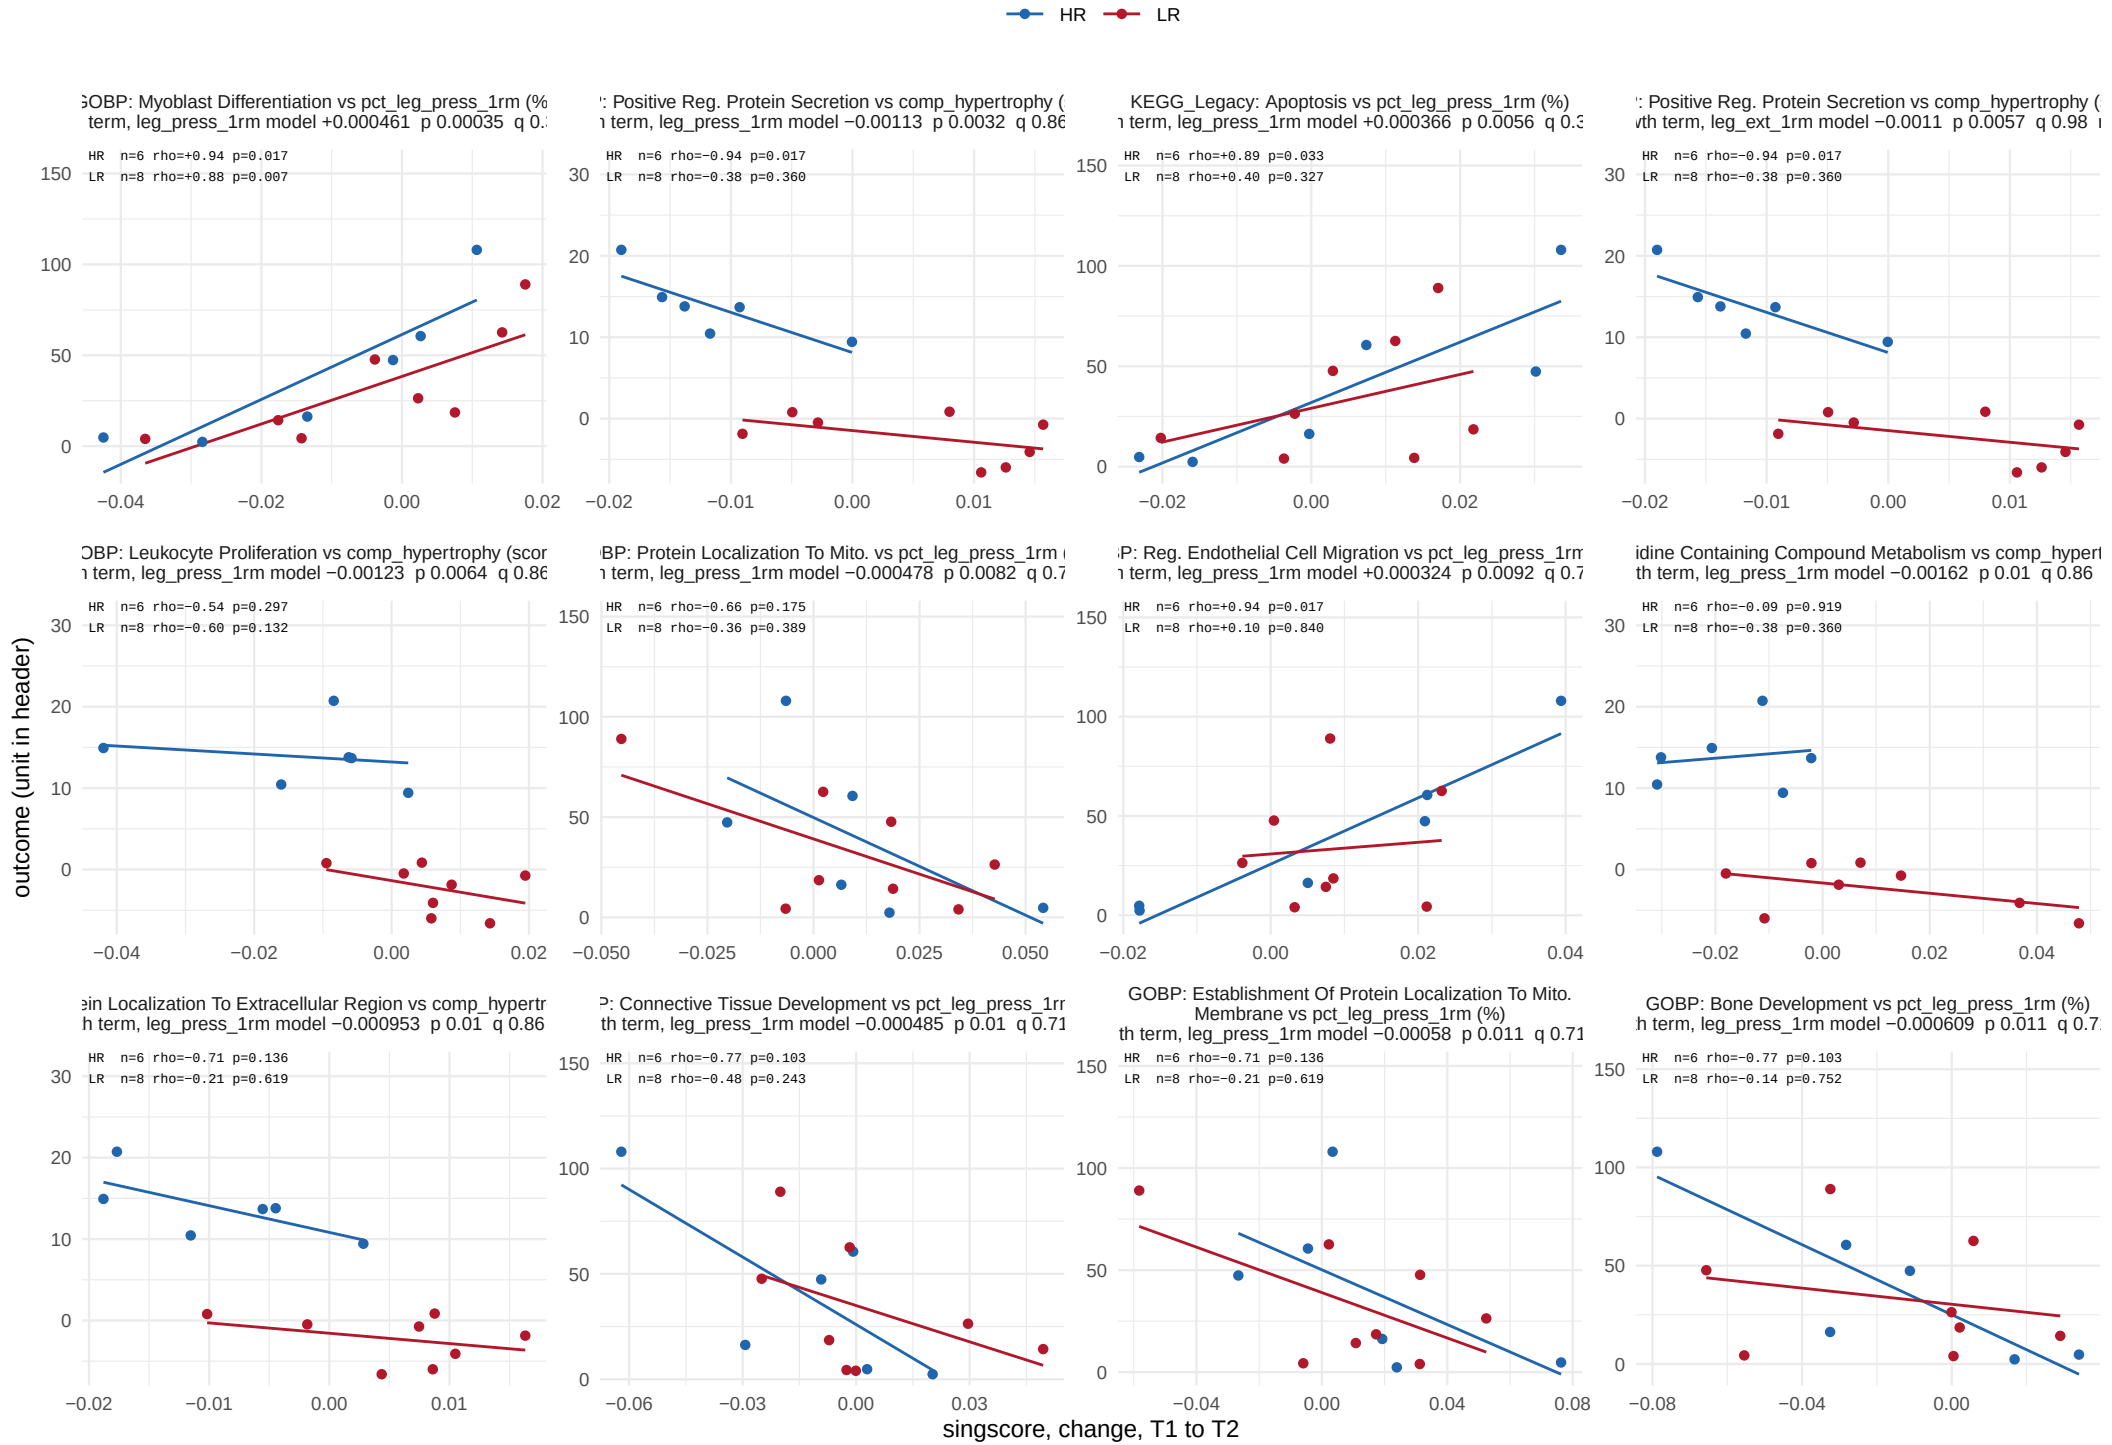

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, two_predictor.

Two predictor, training window


169 of 5512 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 2 of 15.

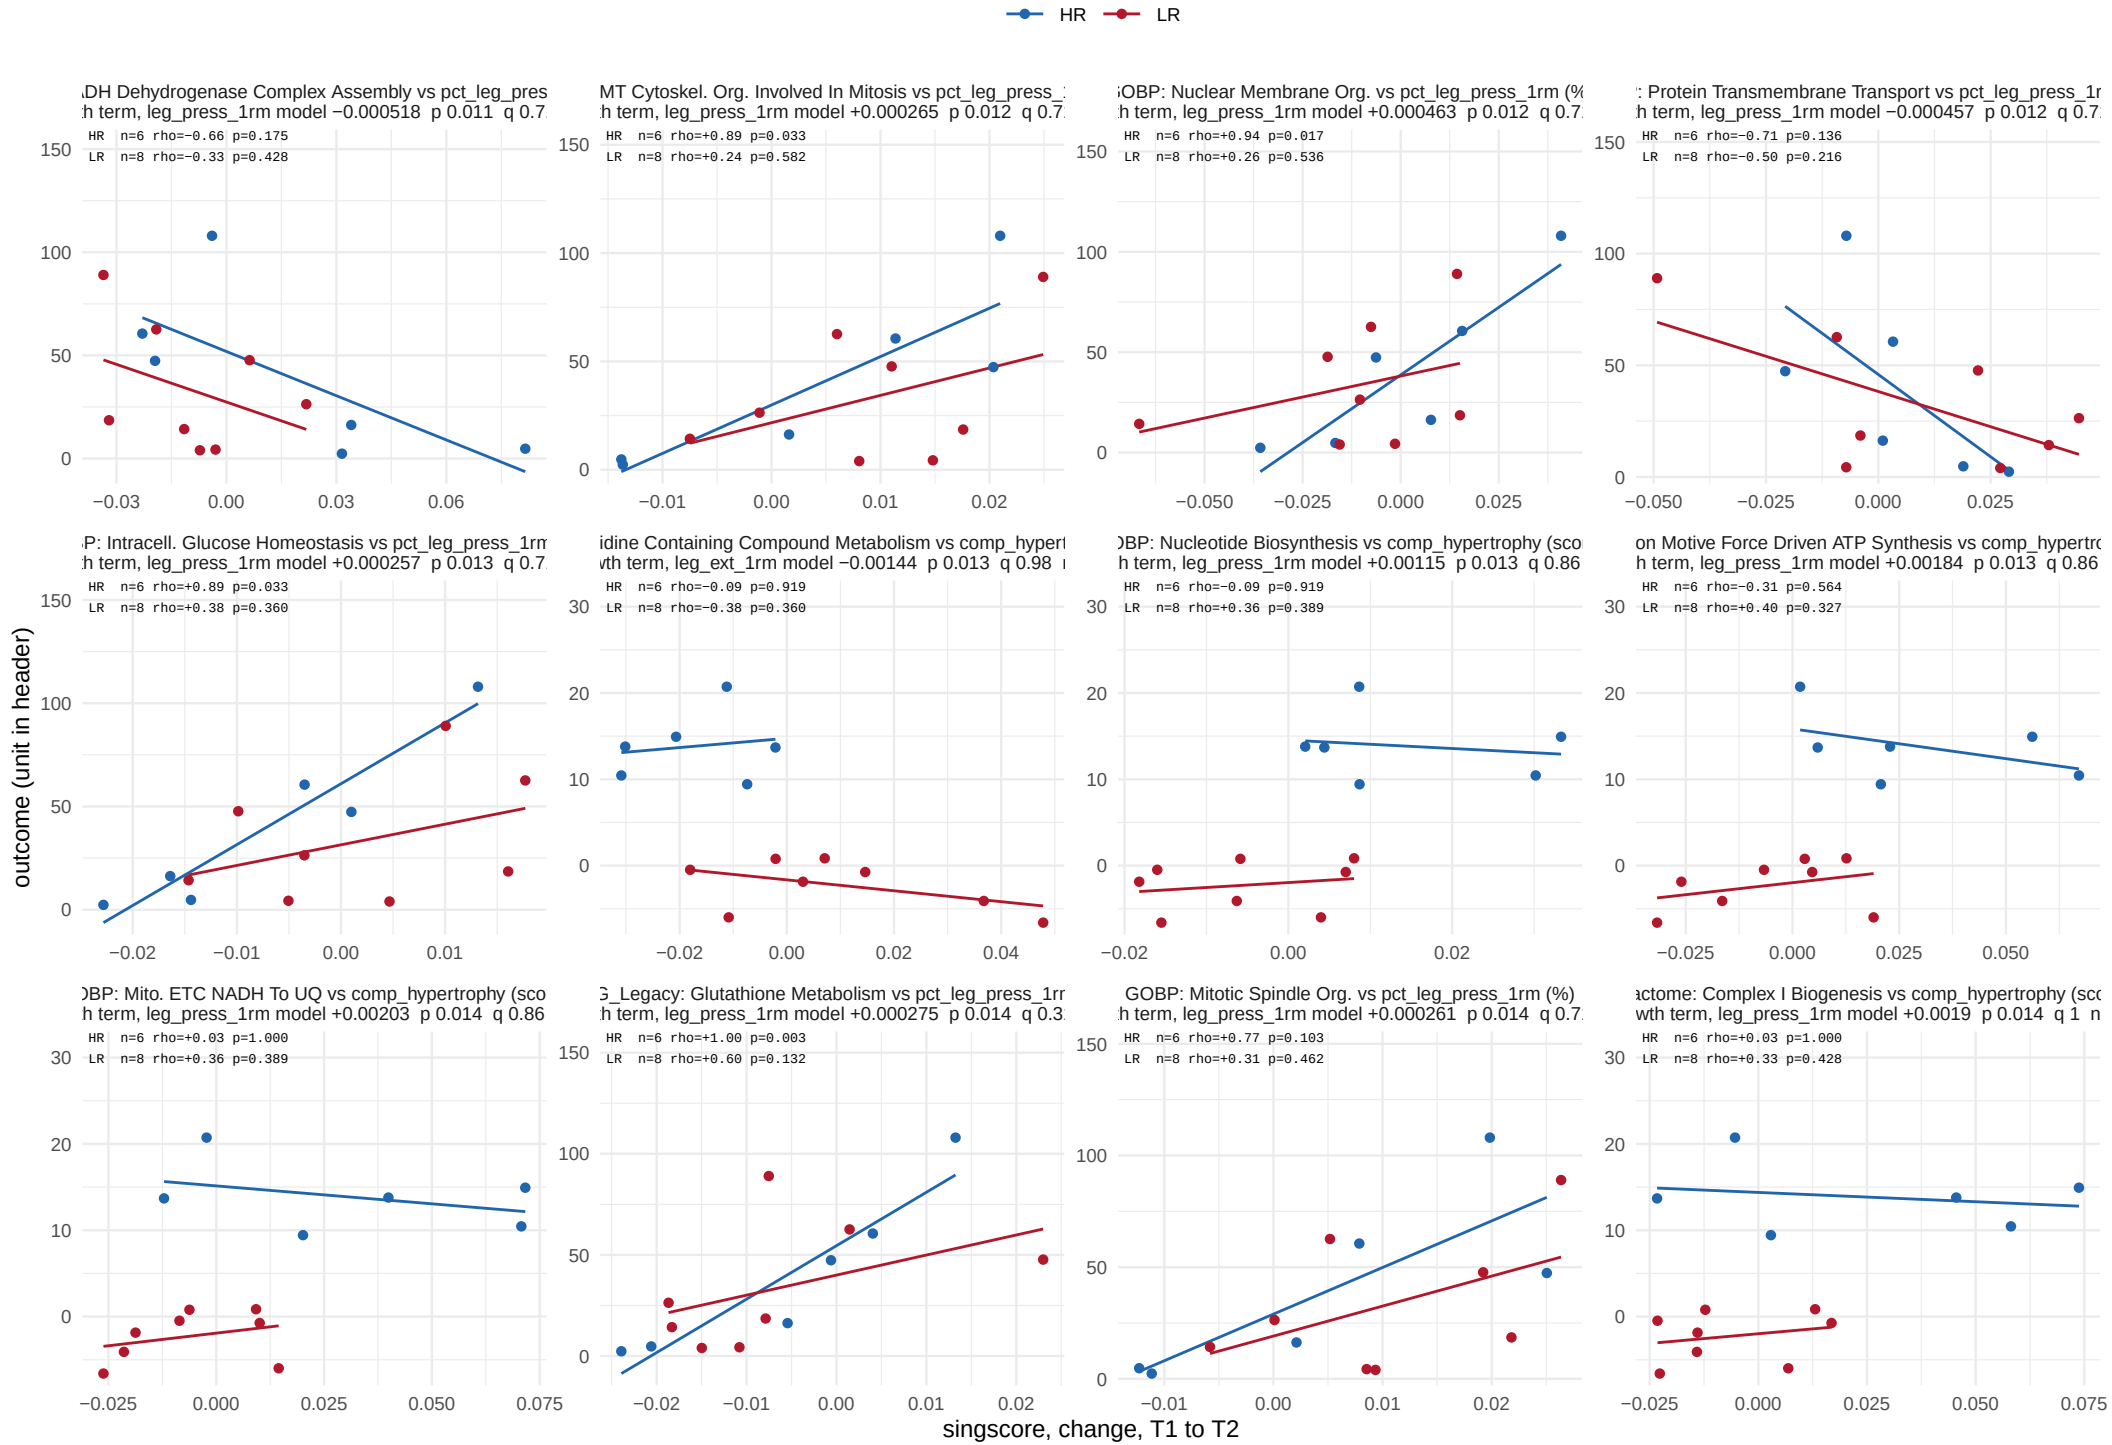

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, two_predictor.

Two predictor, training window


169 of 5512 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 3 of 15.

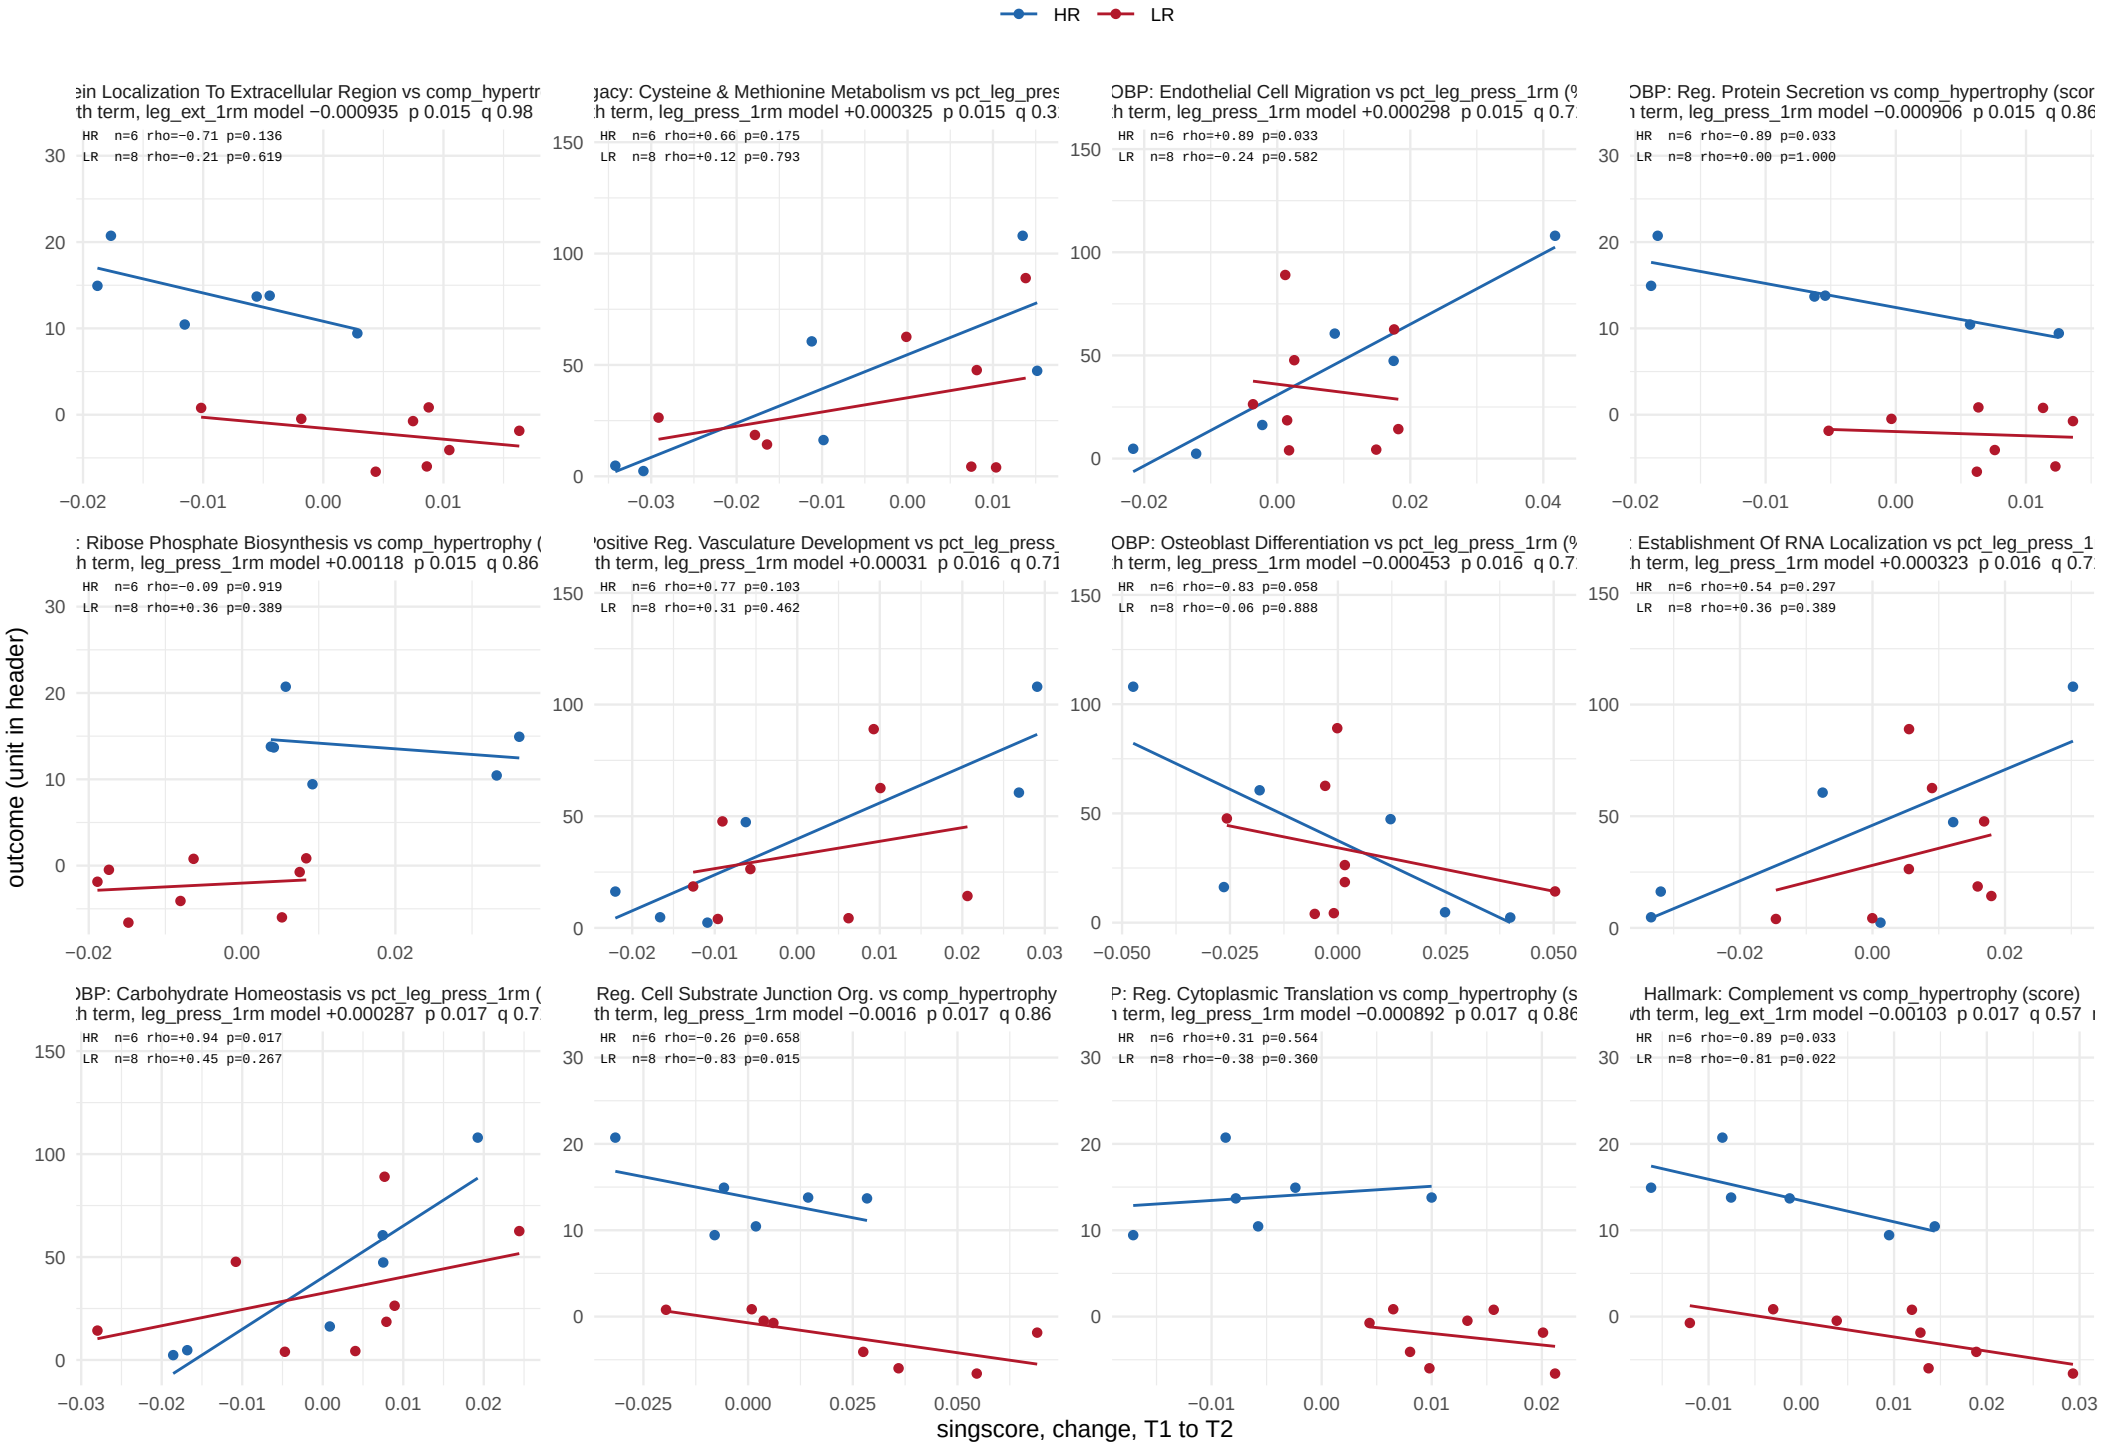

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, two_predictor.

Two predictor, training window


169 of 5512 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 4 of 15.

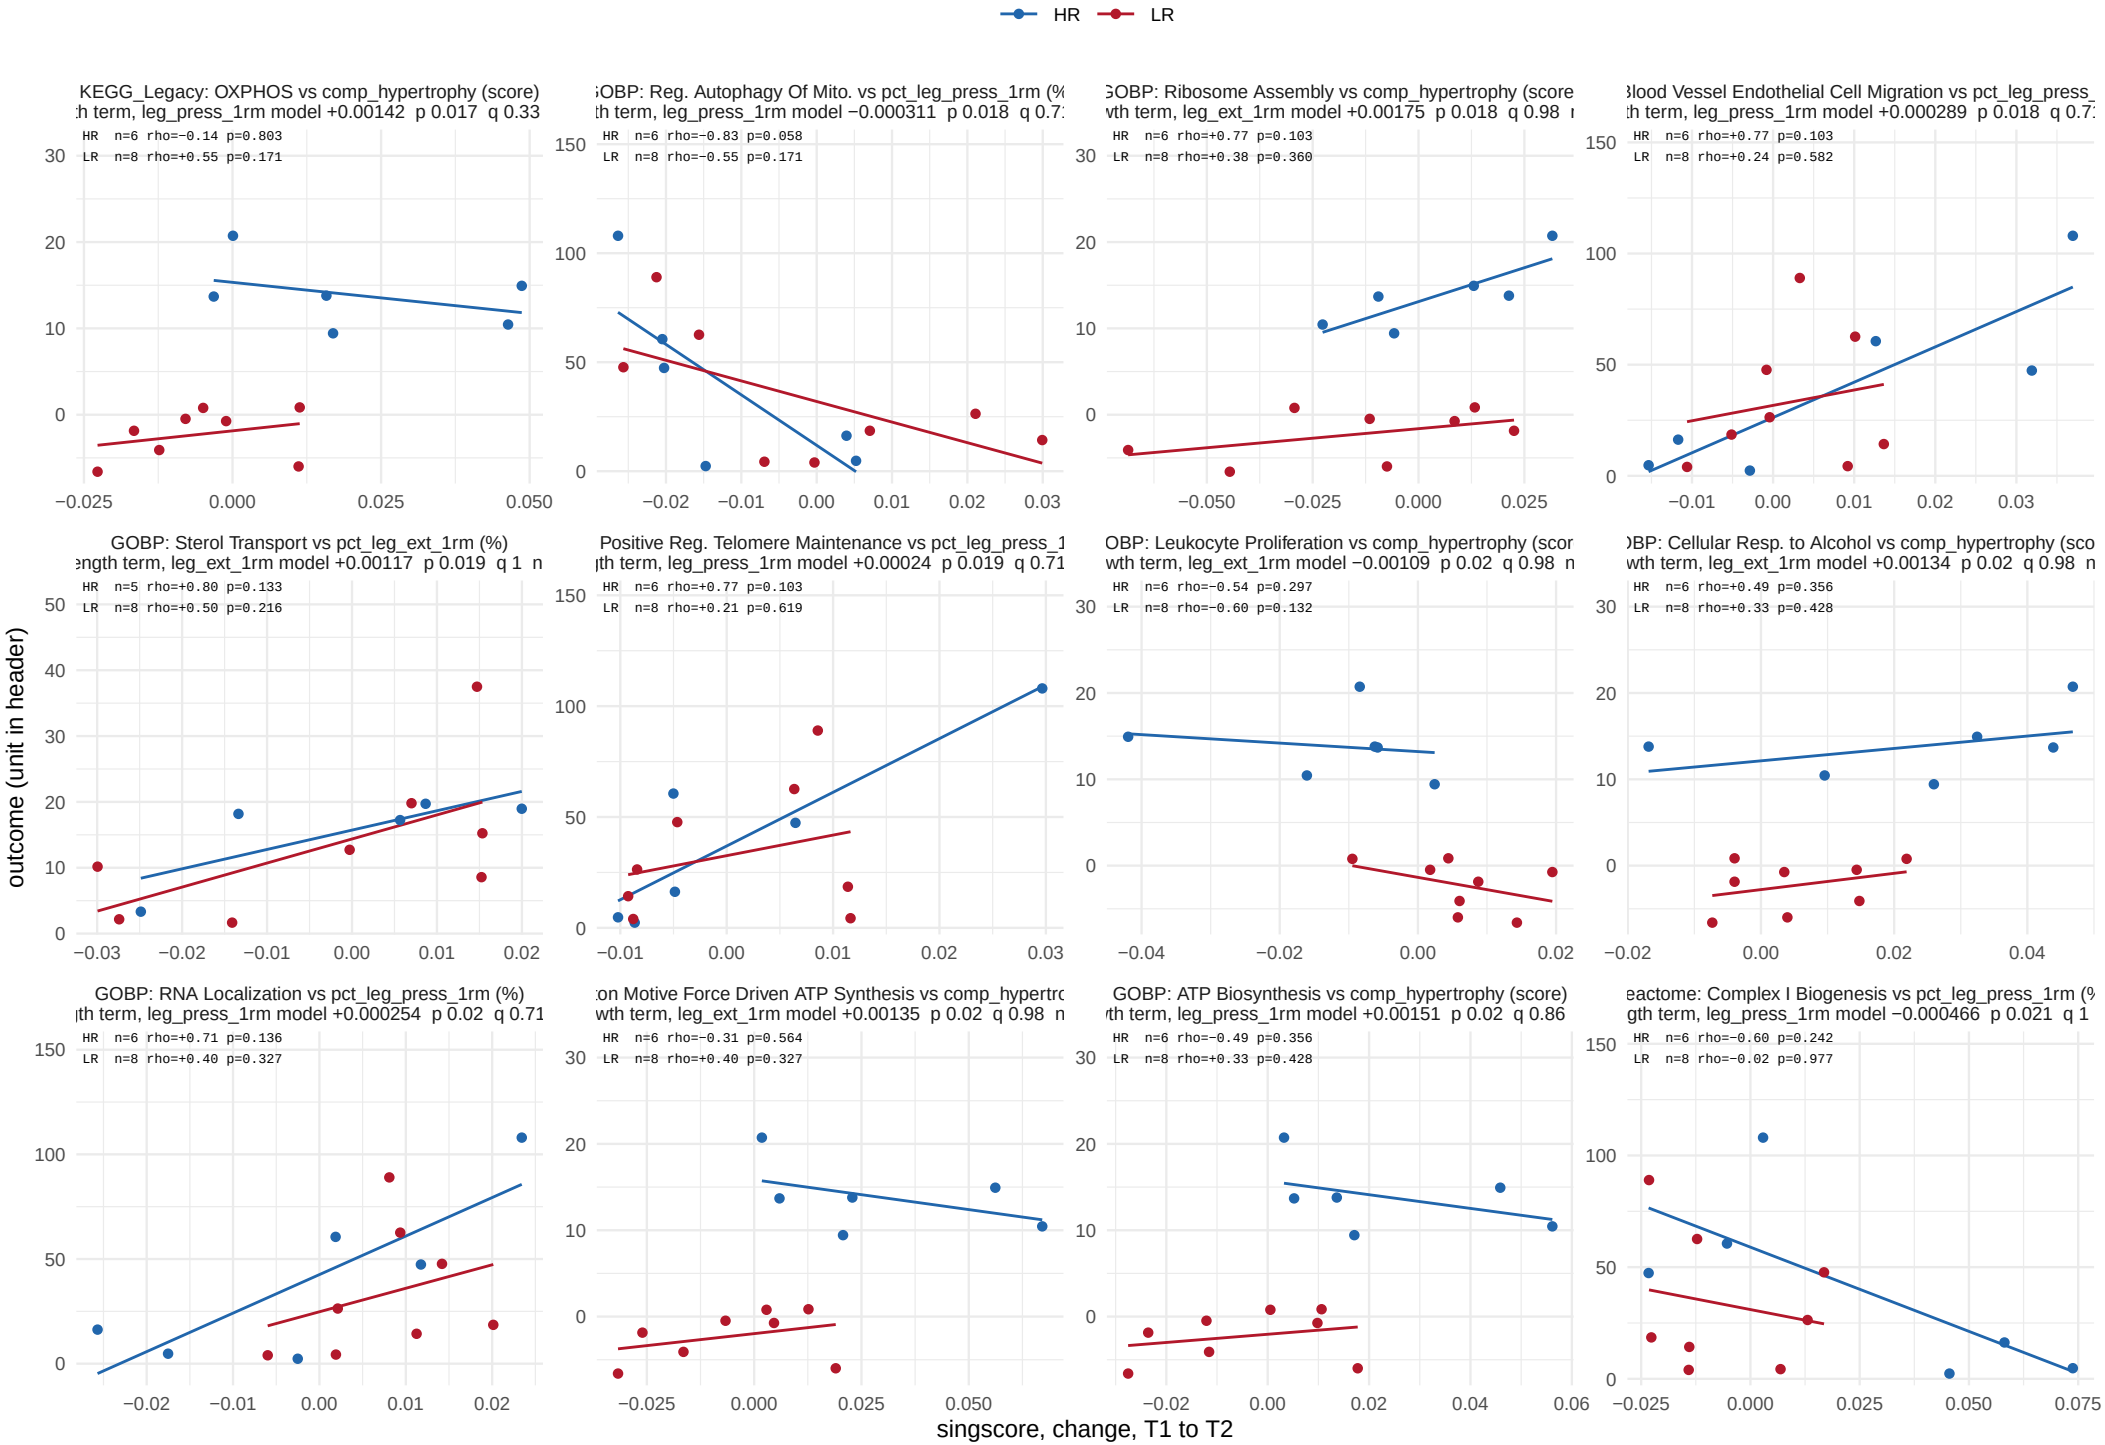

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, two_predictor.

Two predictor, training window


169 of 5512 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 5 of 15.

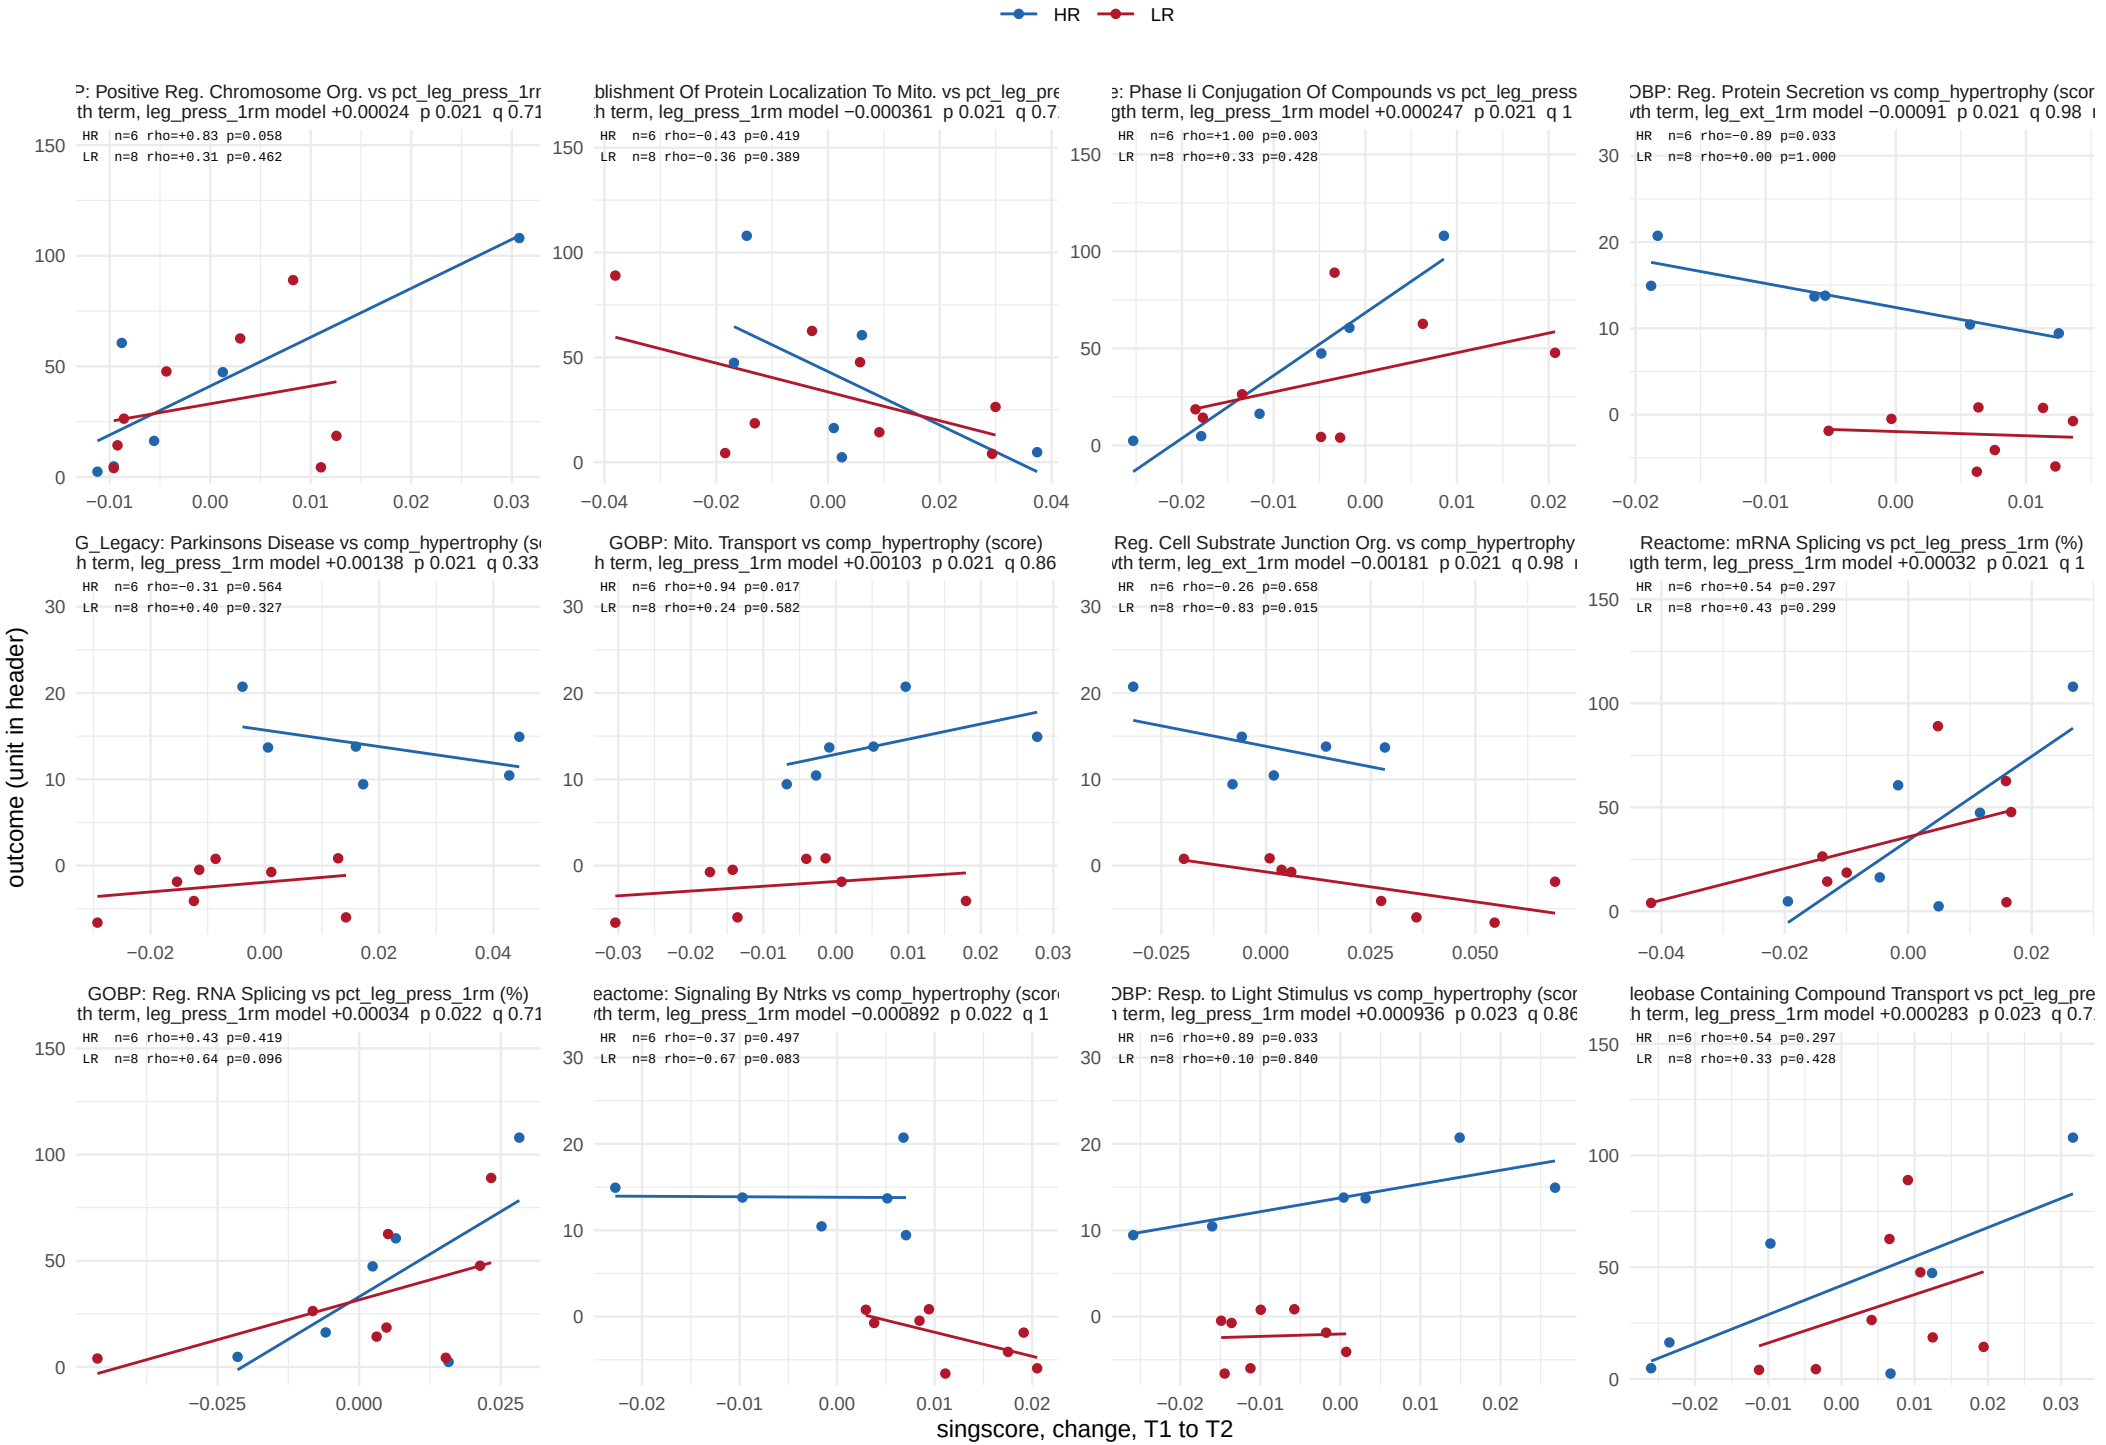

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, two_predictor.

Two predictor, training window


169 of 5512 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 6 of 15.

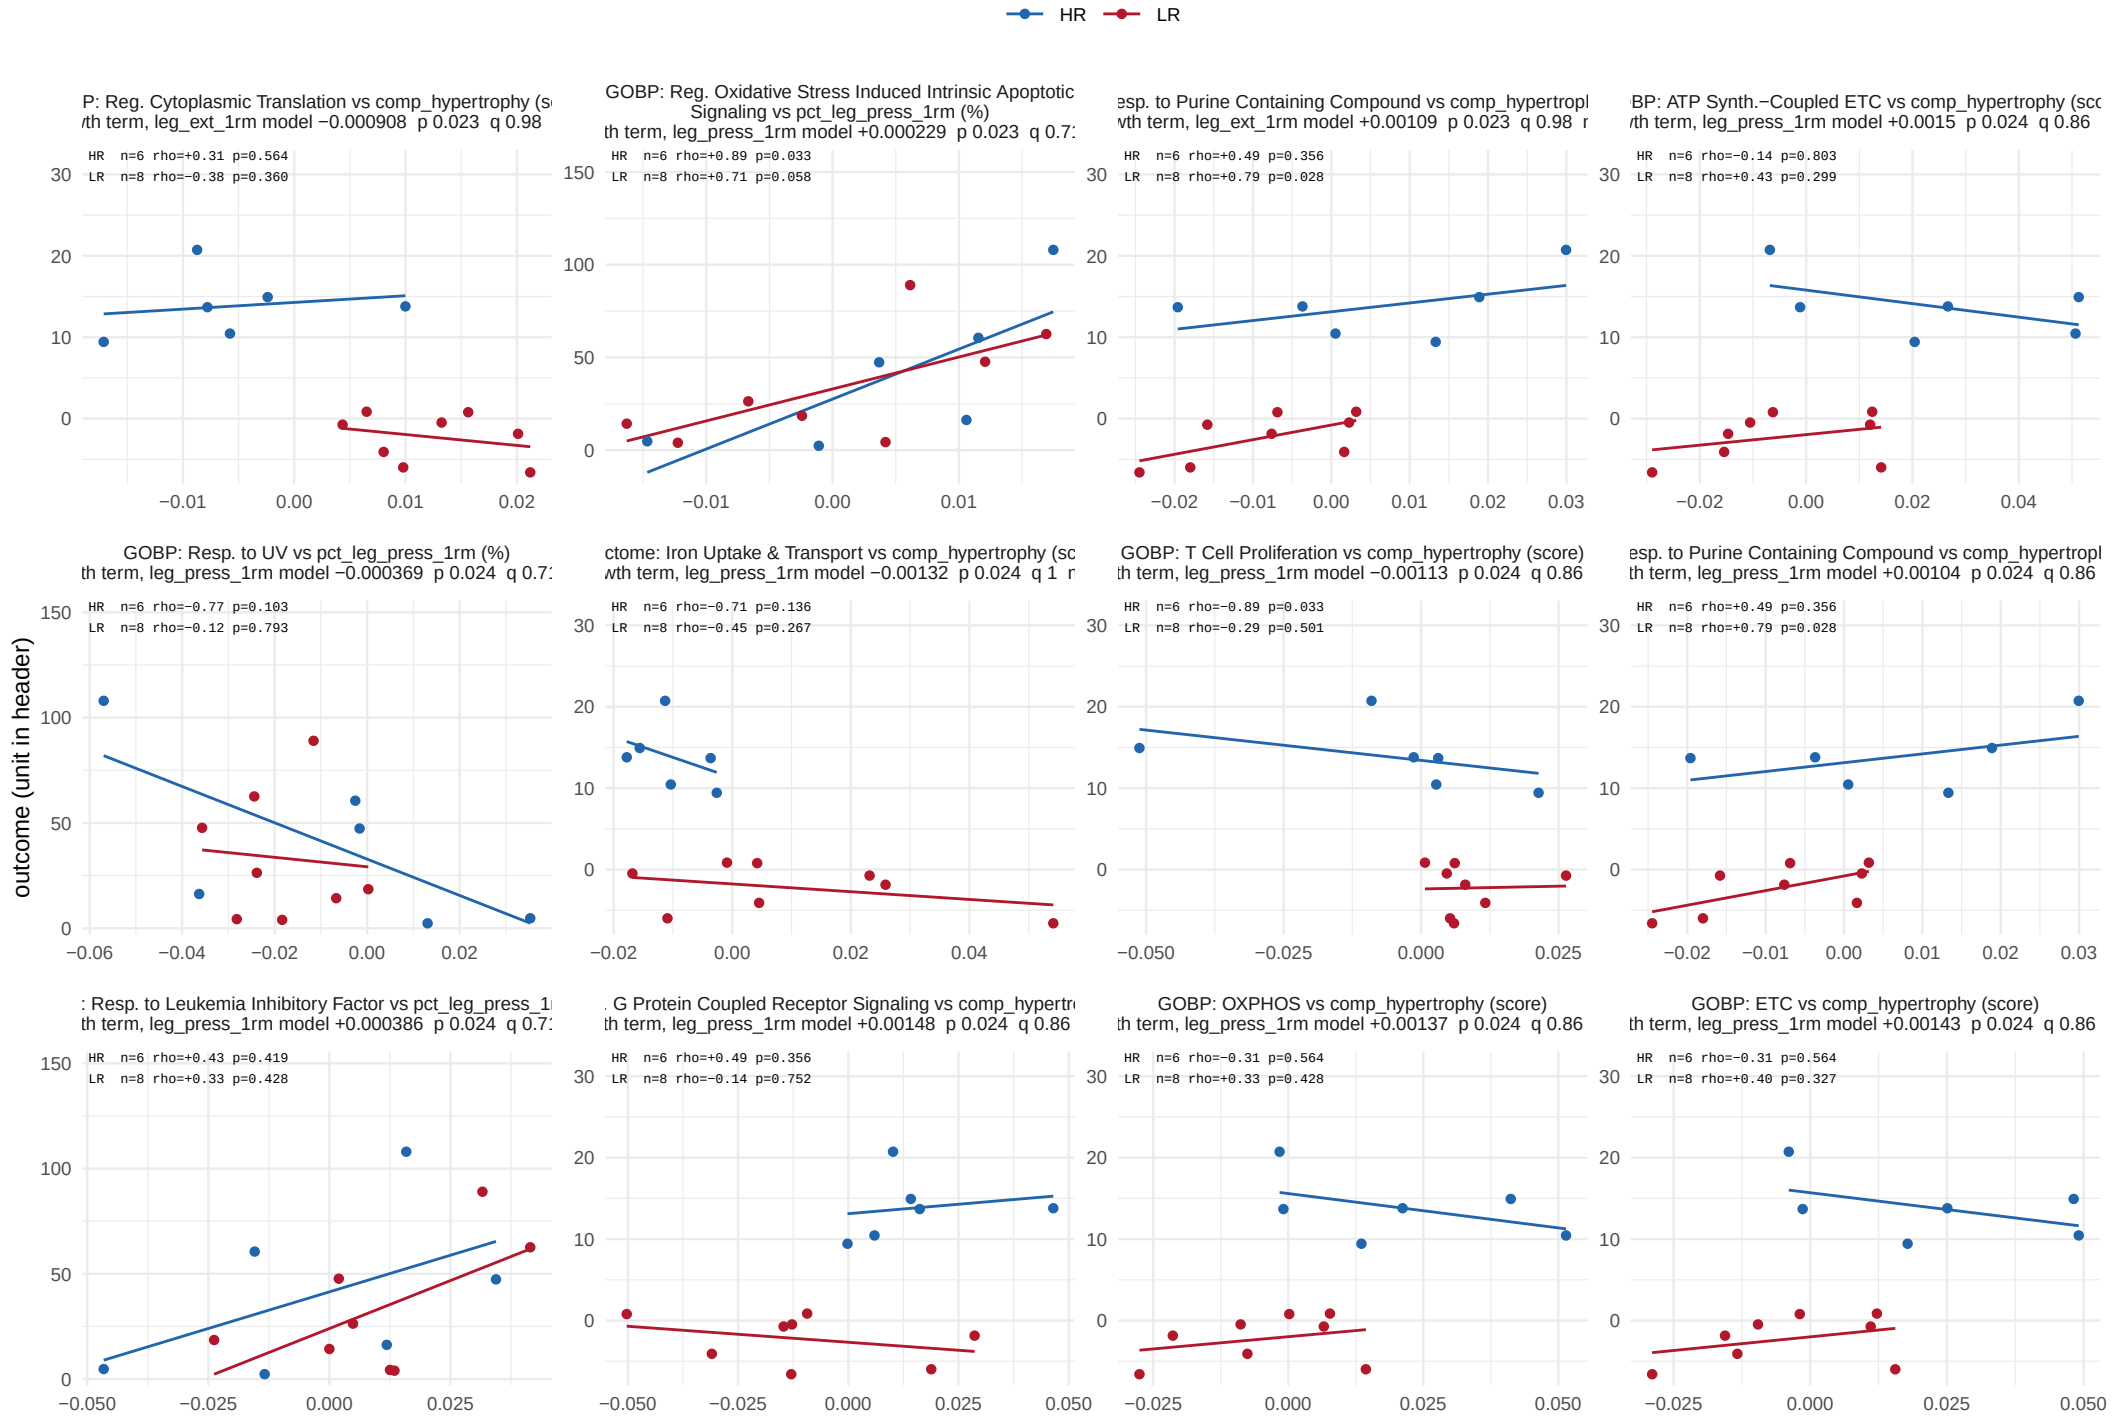

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, two_predictor.

Two predictor, training window


169 of 5512 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 7 of 15.

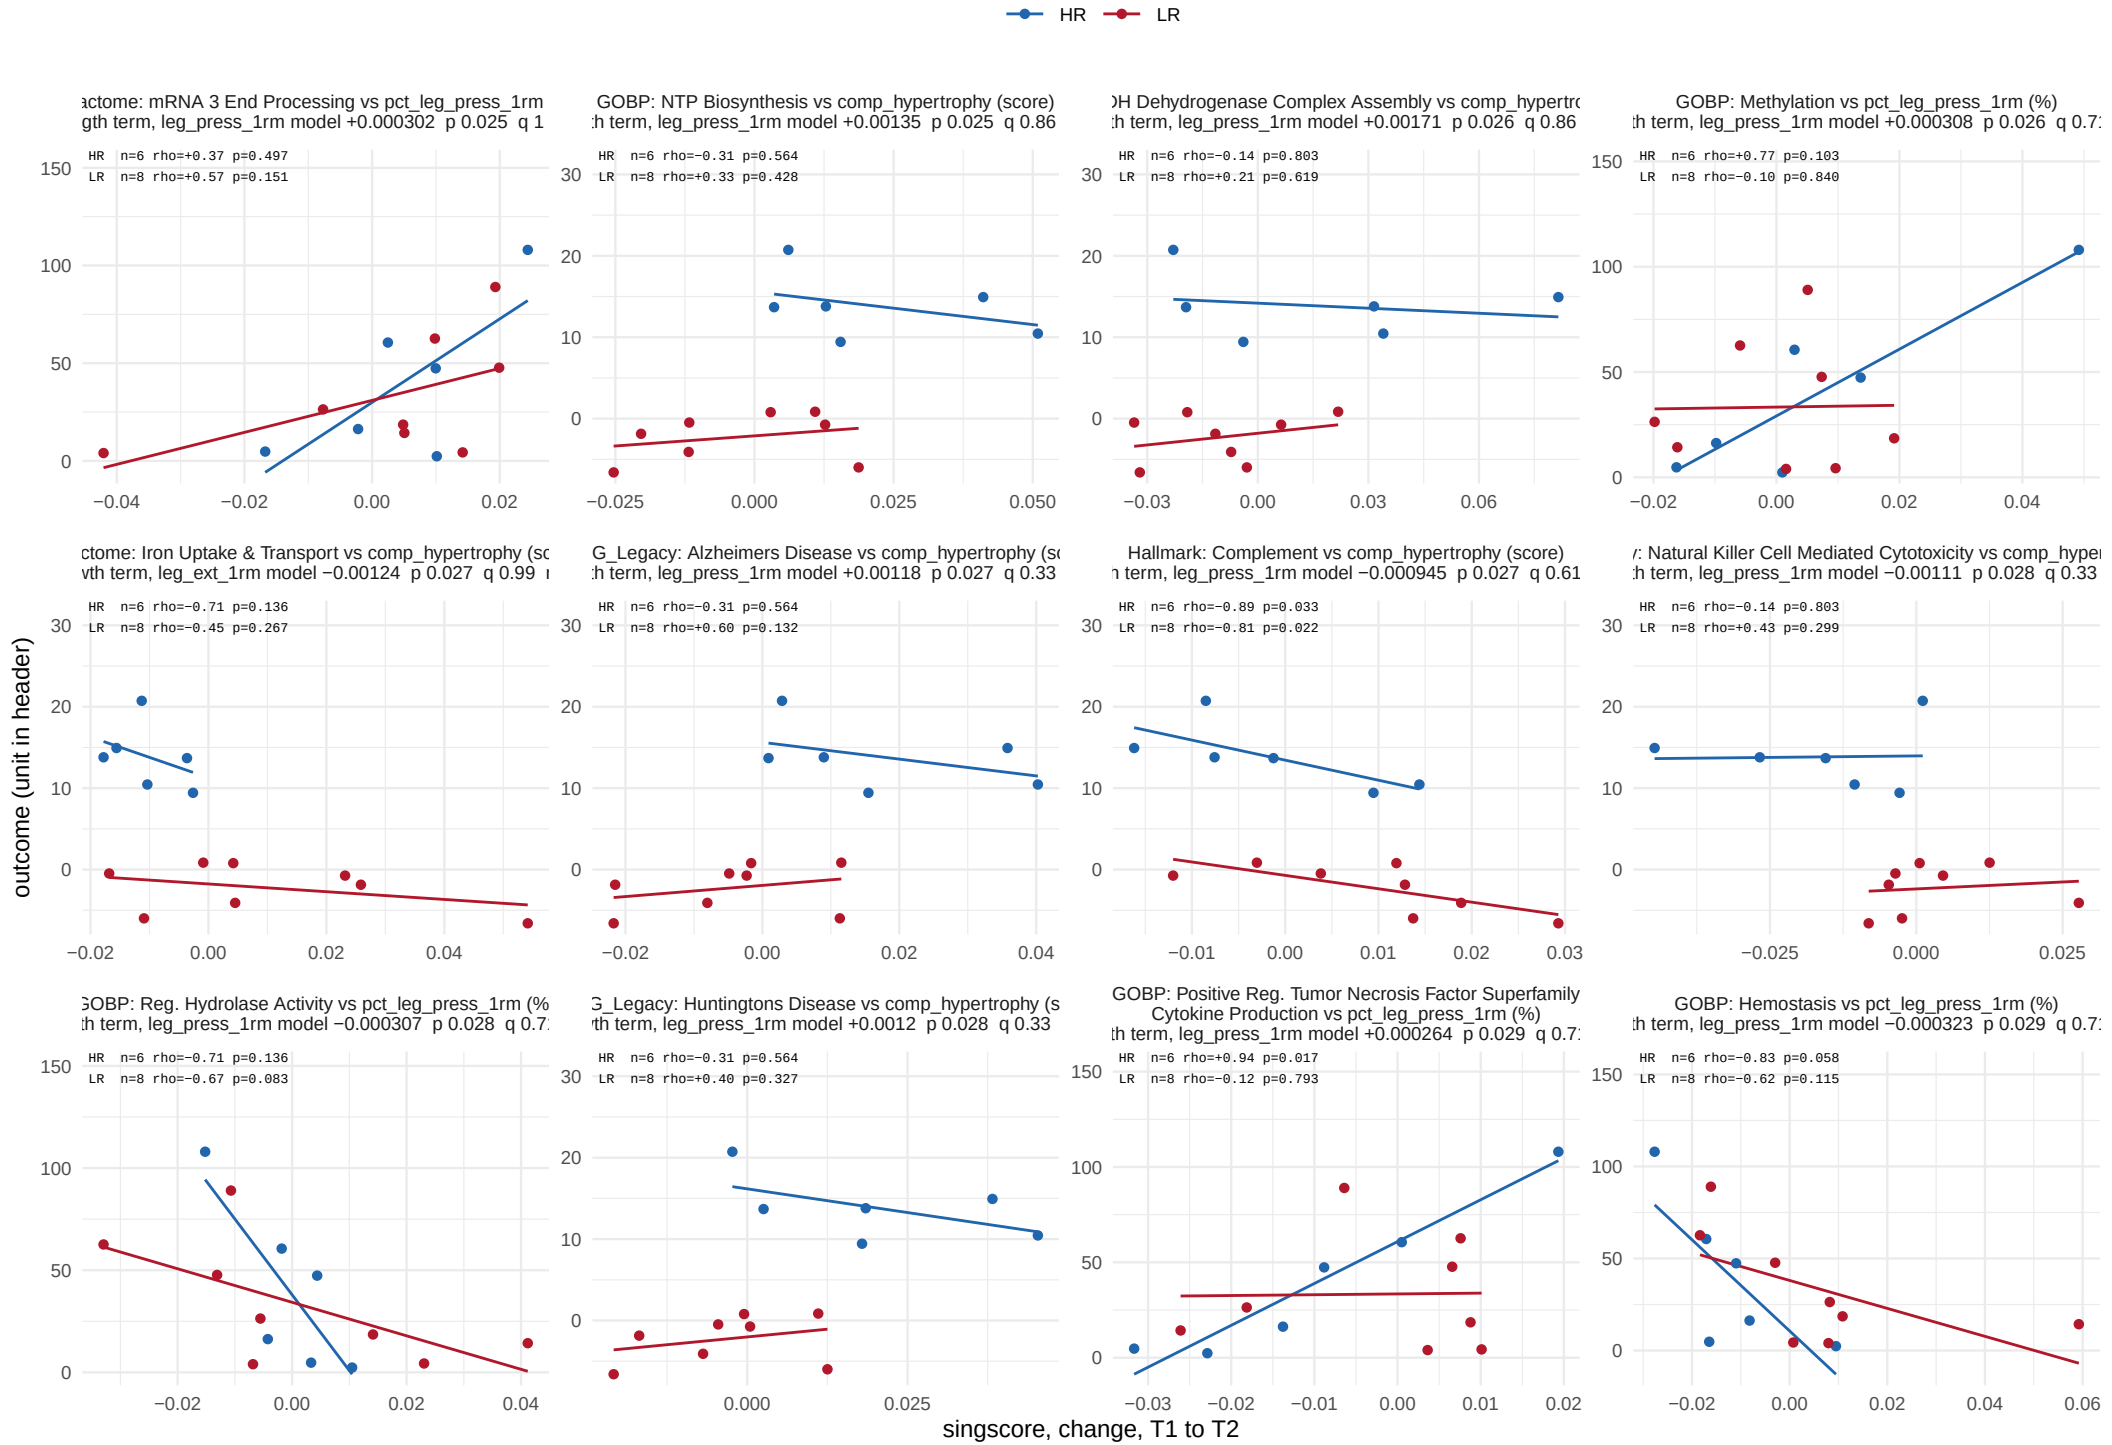

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, two_predictor.

Two predictor, training window


169 of 5512 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 8 of 15.

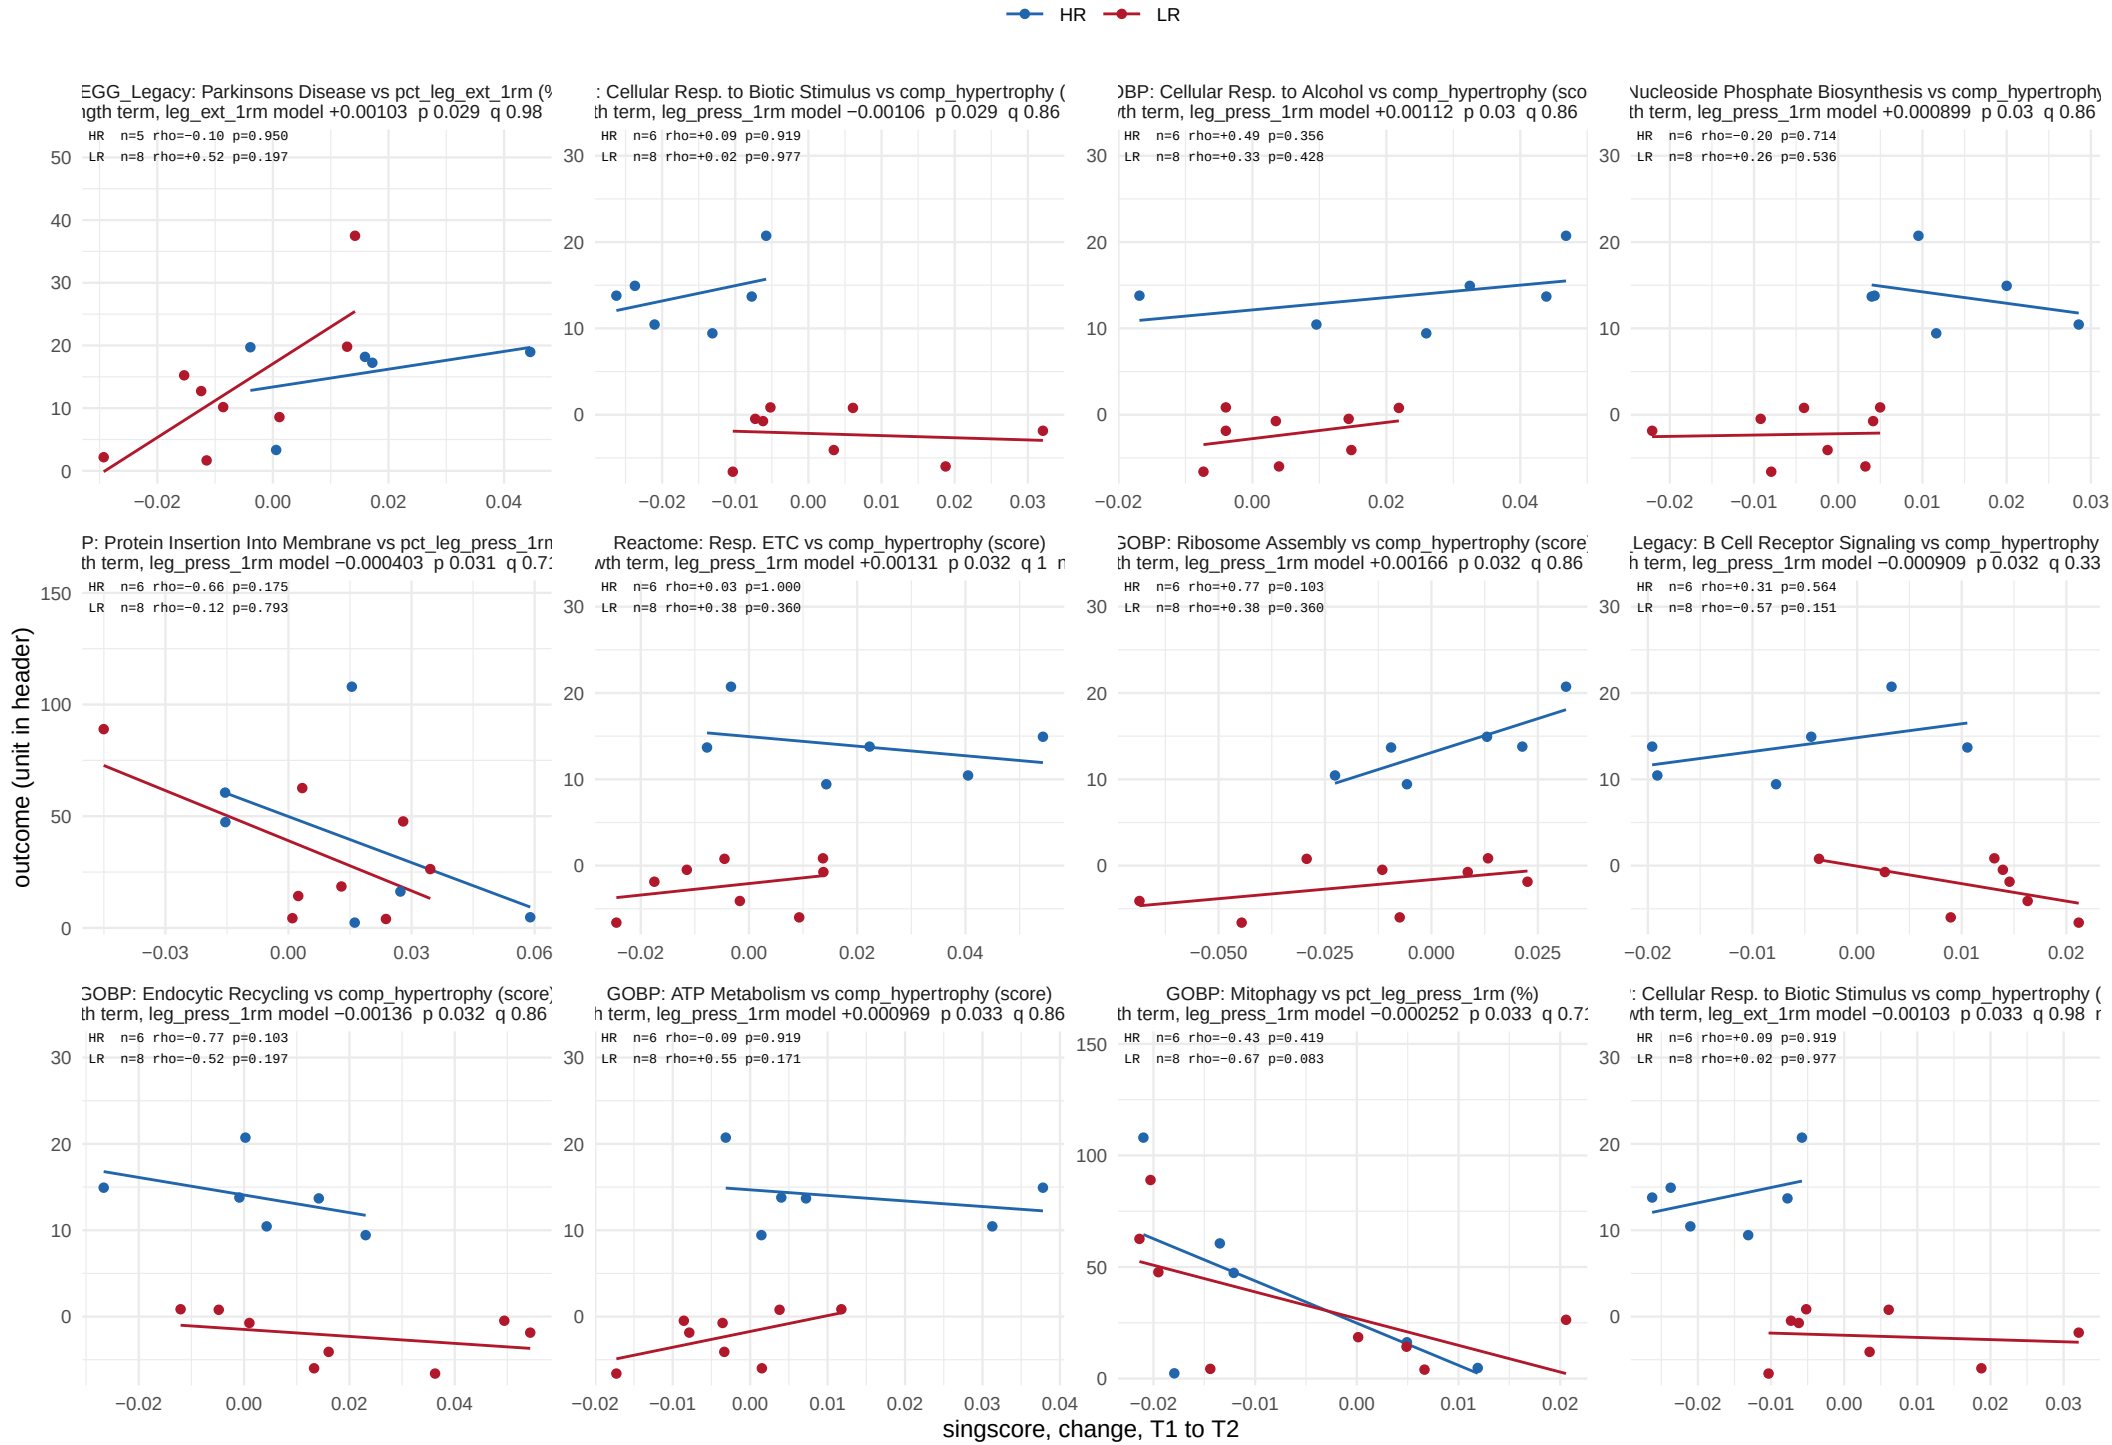

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, two_predictor.

Two predictor, training window


169 of 5512 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 9 of 15.

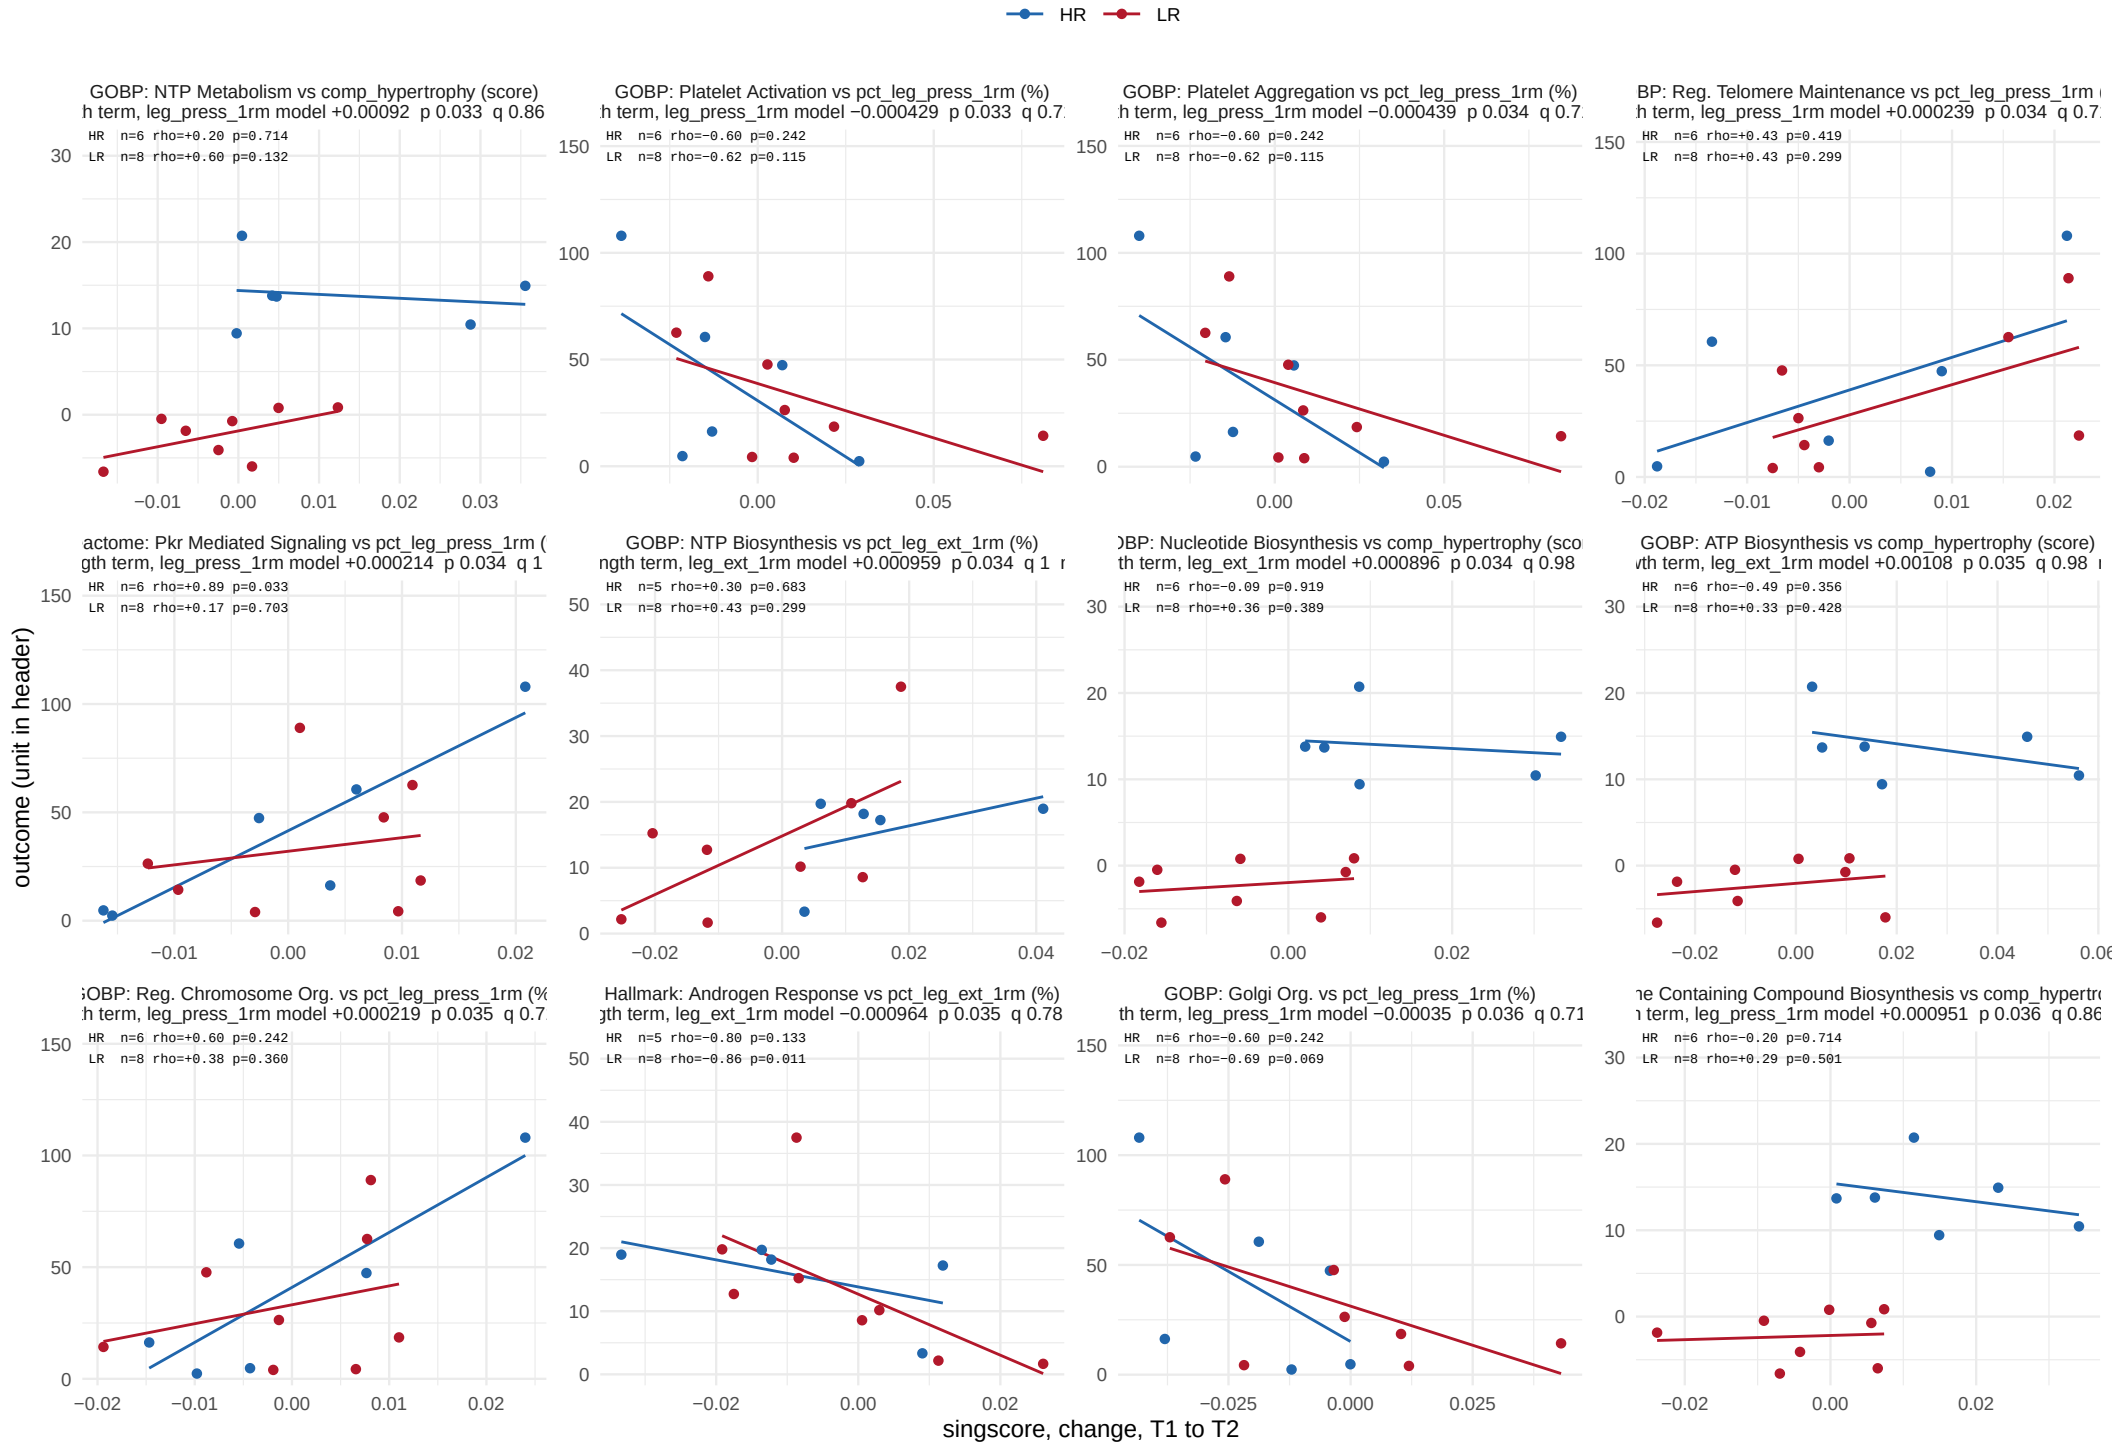

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, two_predictor.

Two predictor, training window


169 of 5512 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 10 of 15.

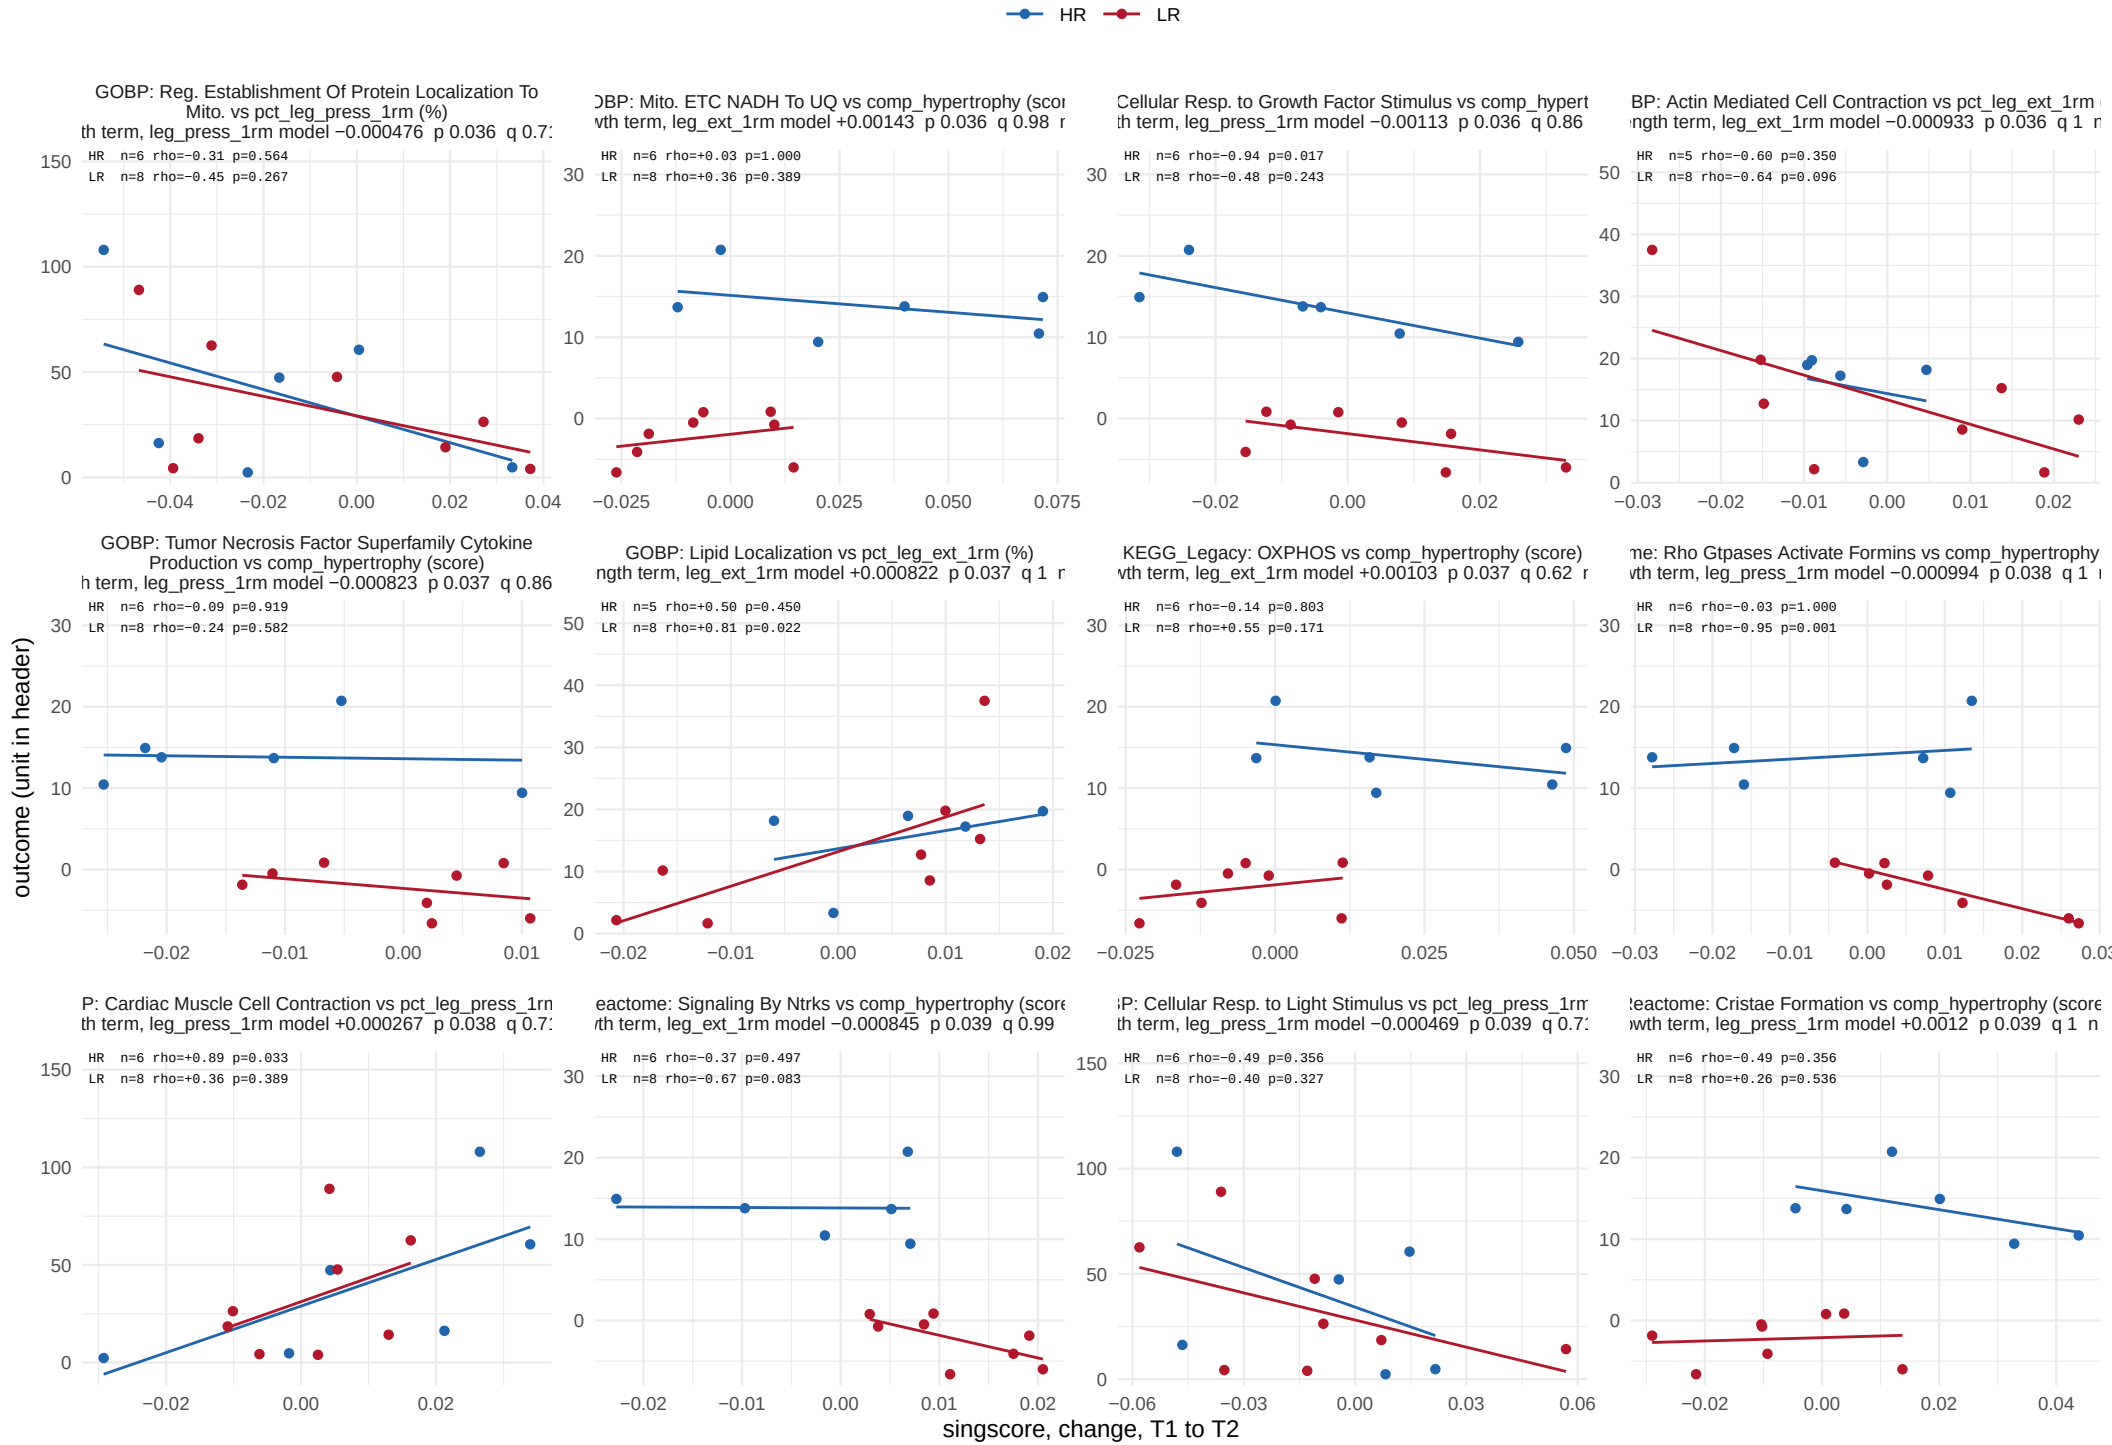

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, two_predictor.

Two predictor, training window


169 of 5512 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 11 of 15.

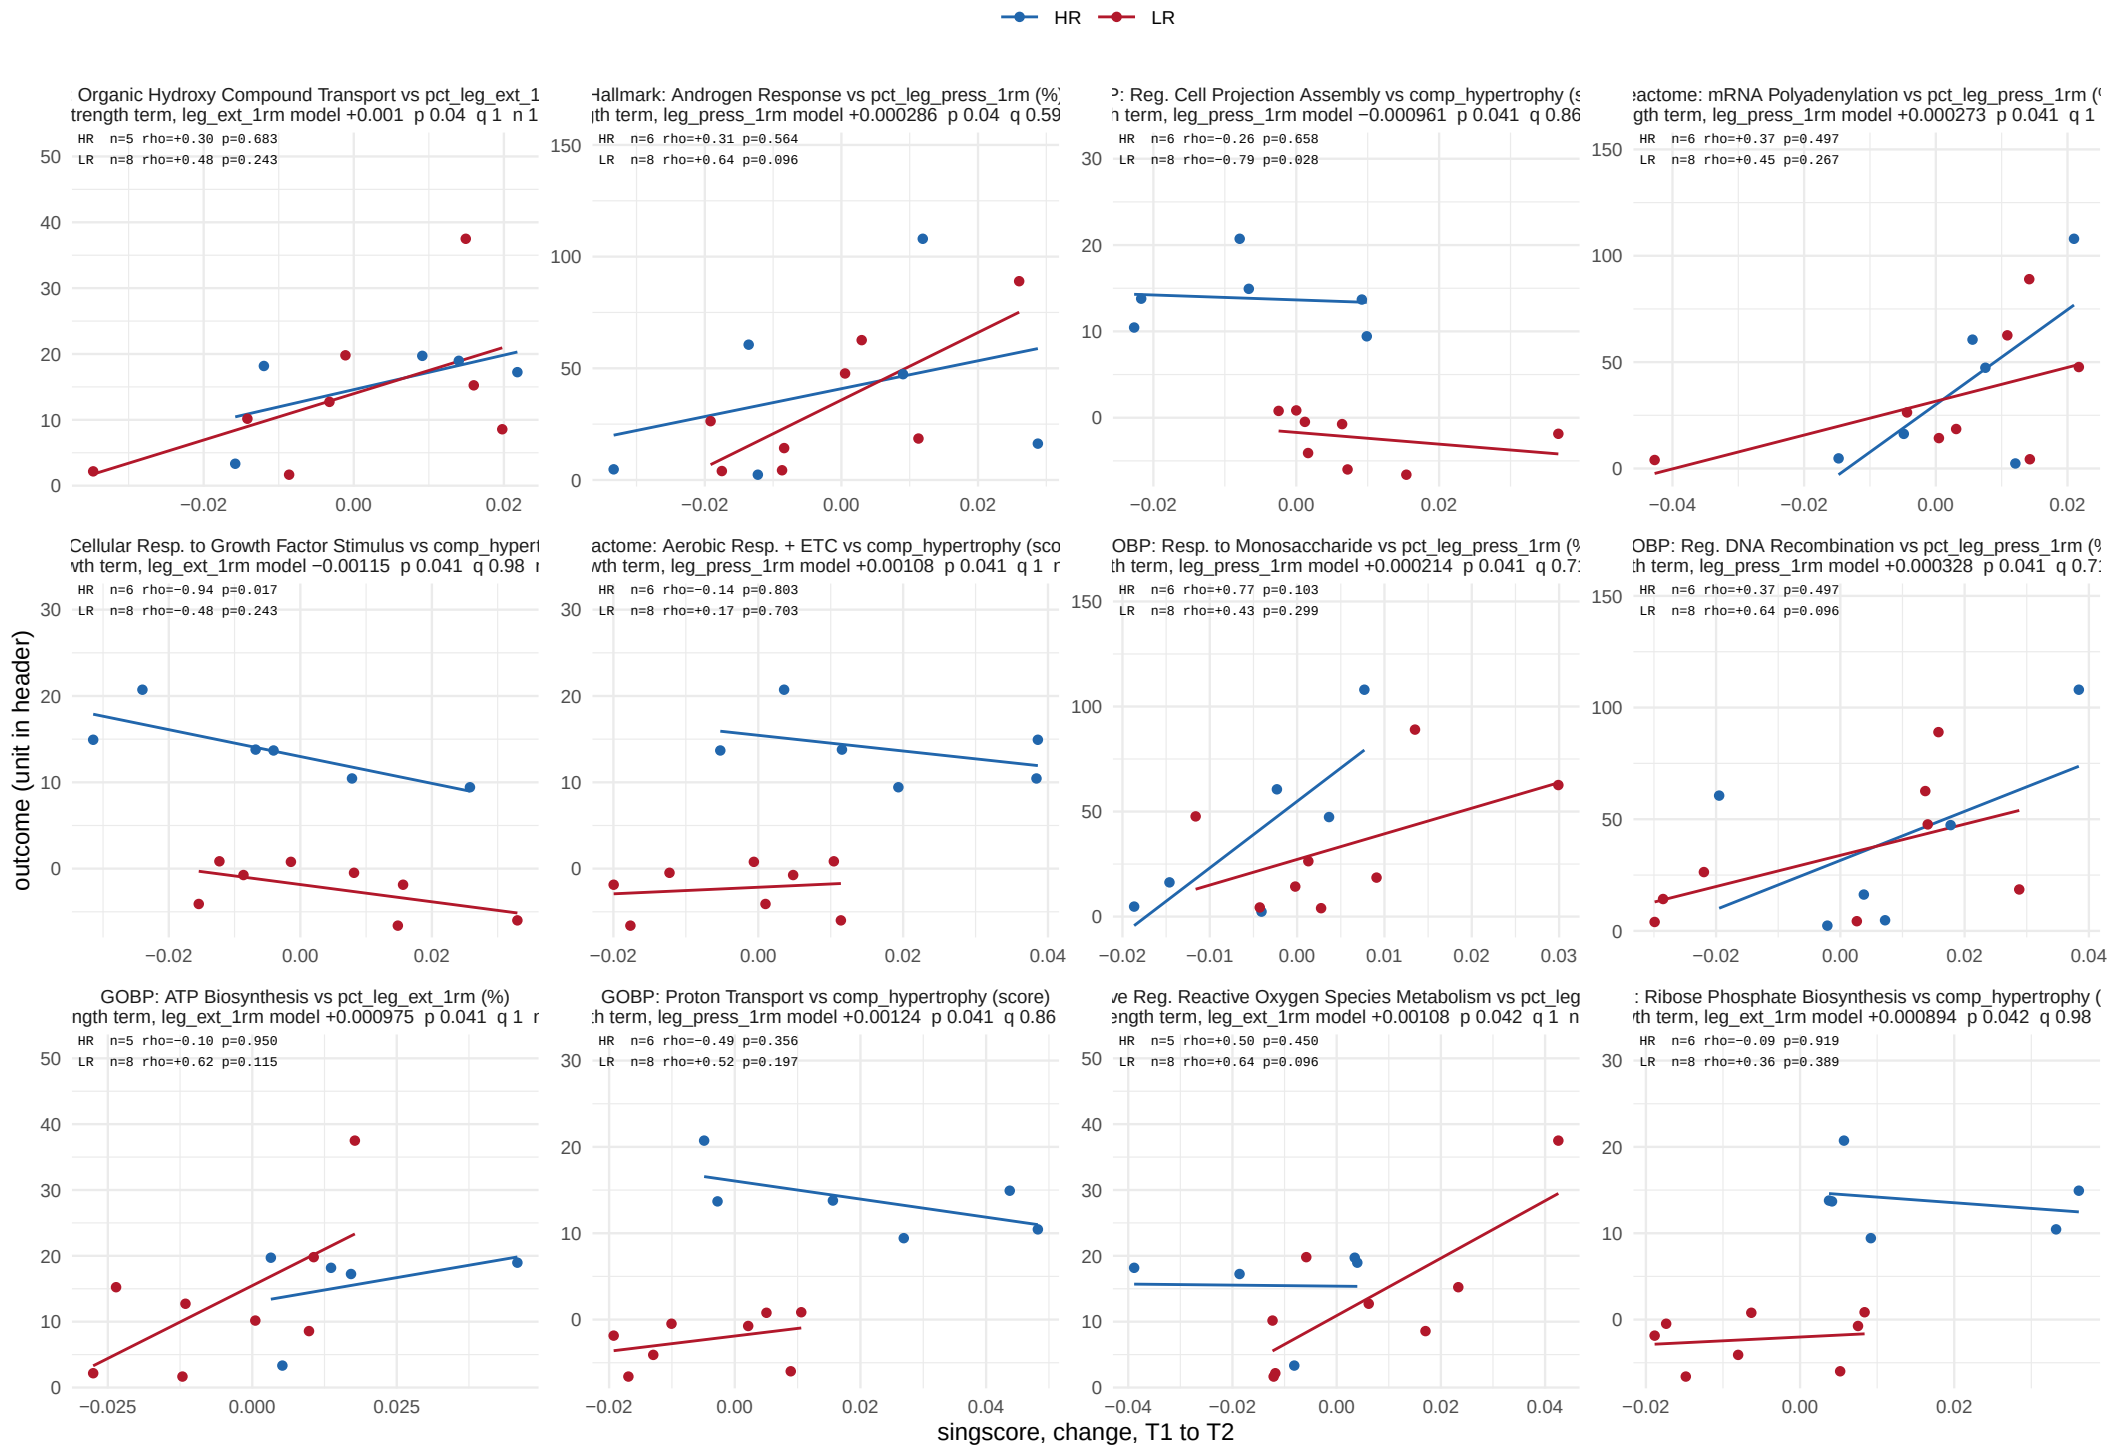

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, two_predictor.

Two predictor, training window


169 of 5512 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 12 of 15.

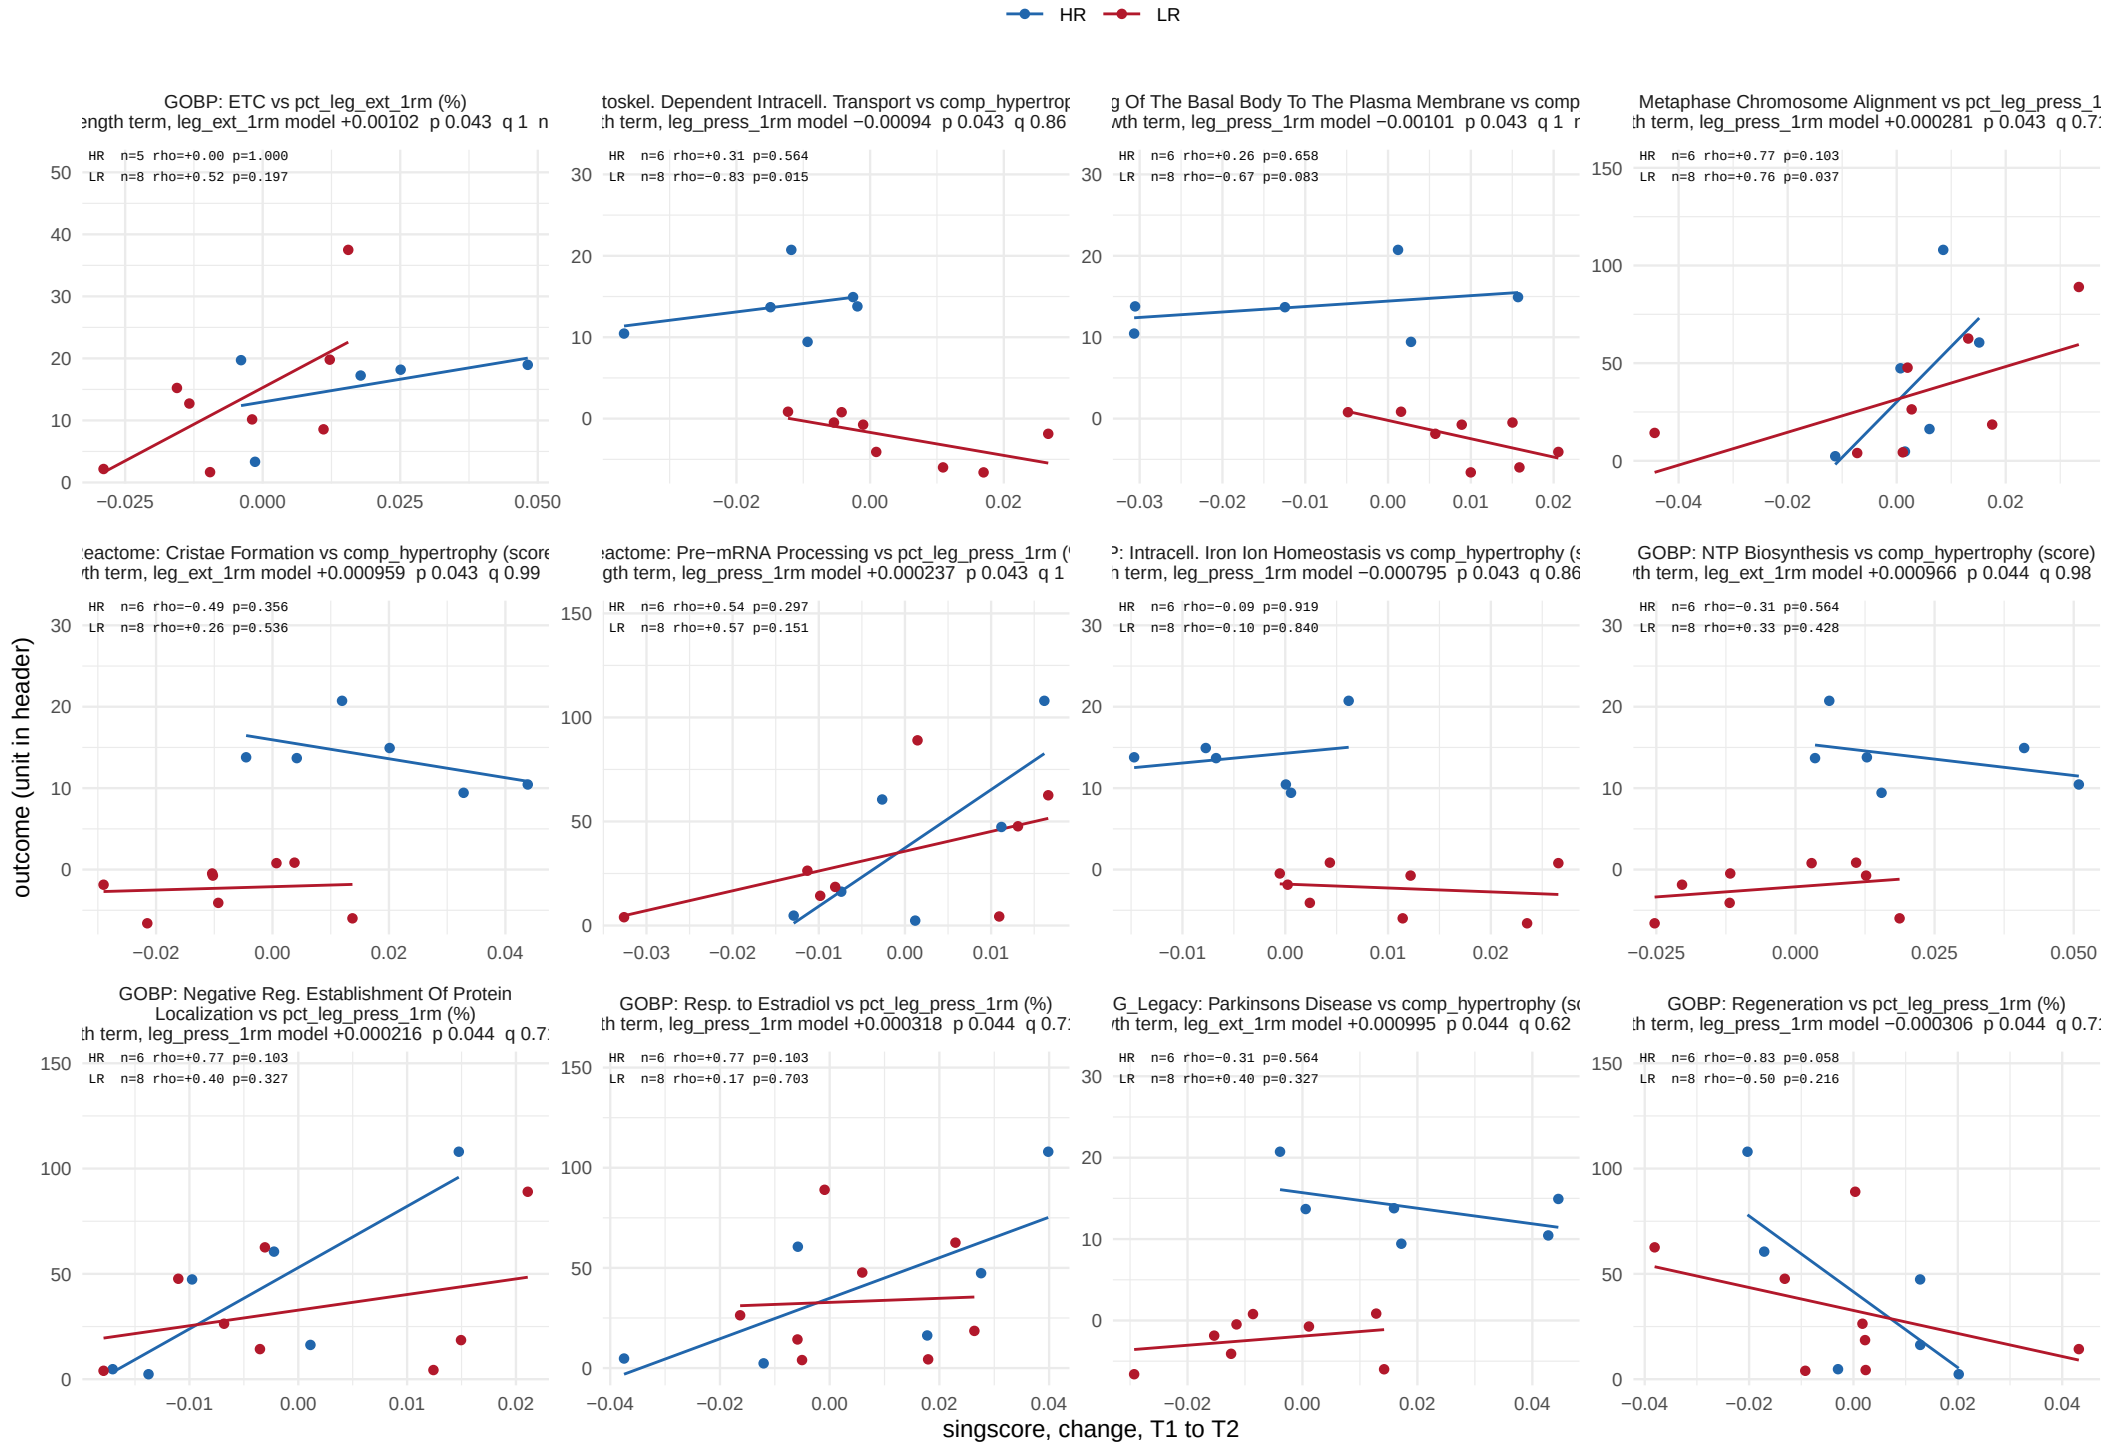

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, two_predictor.

Two predictor, training window


169 of 5512 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 13 of 15.

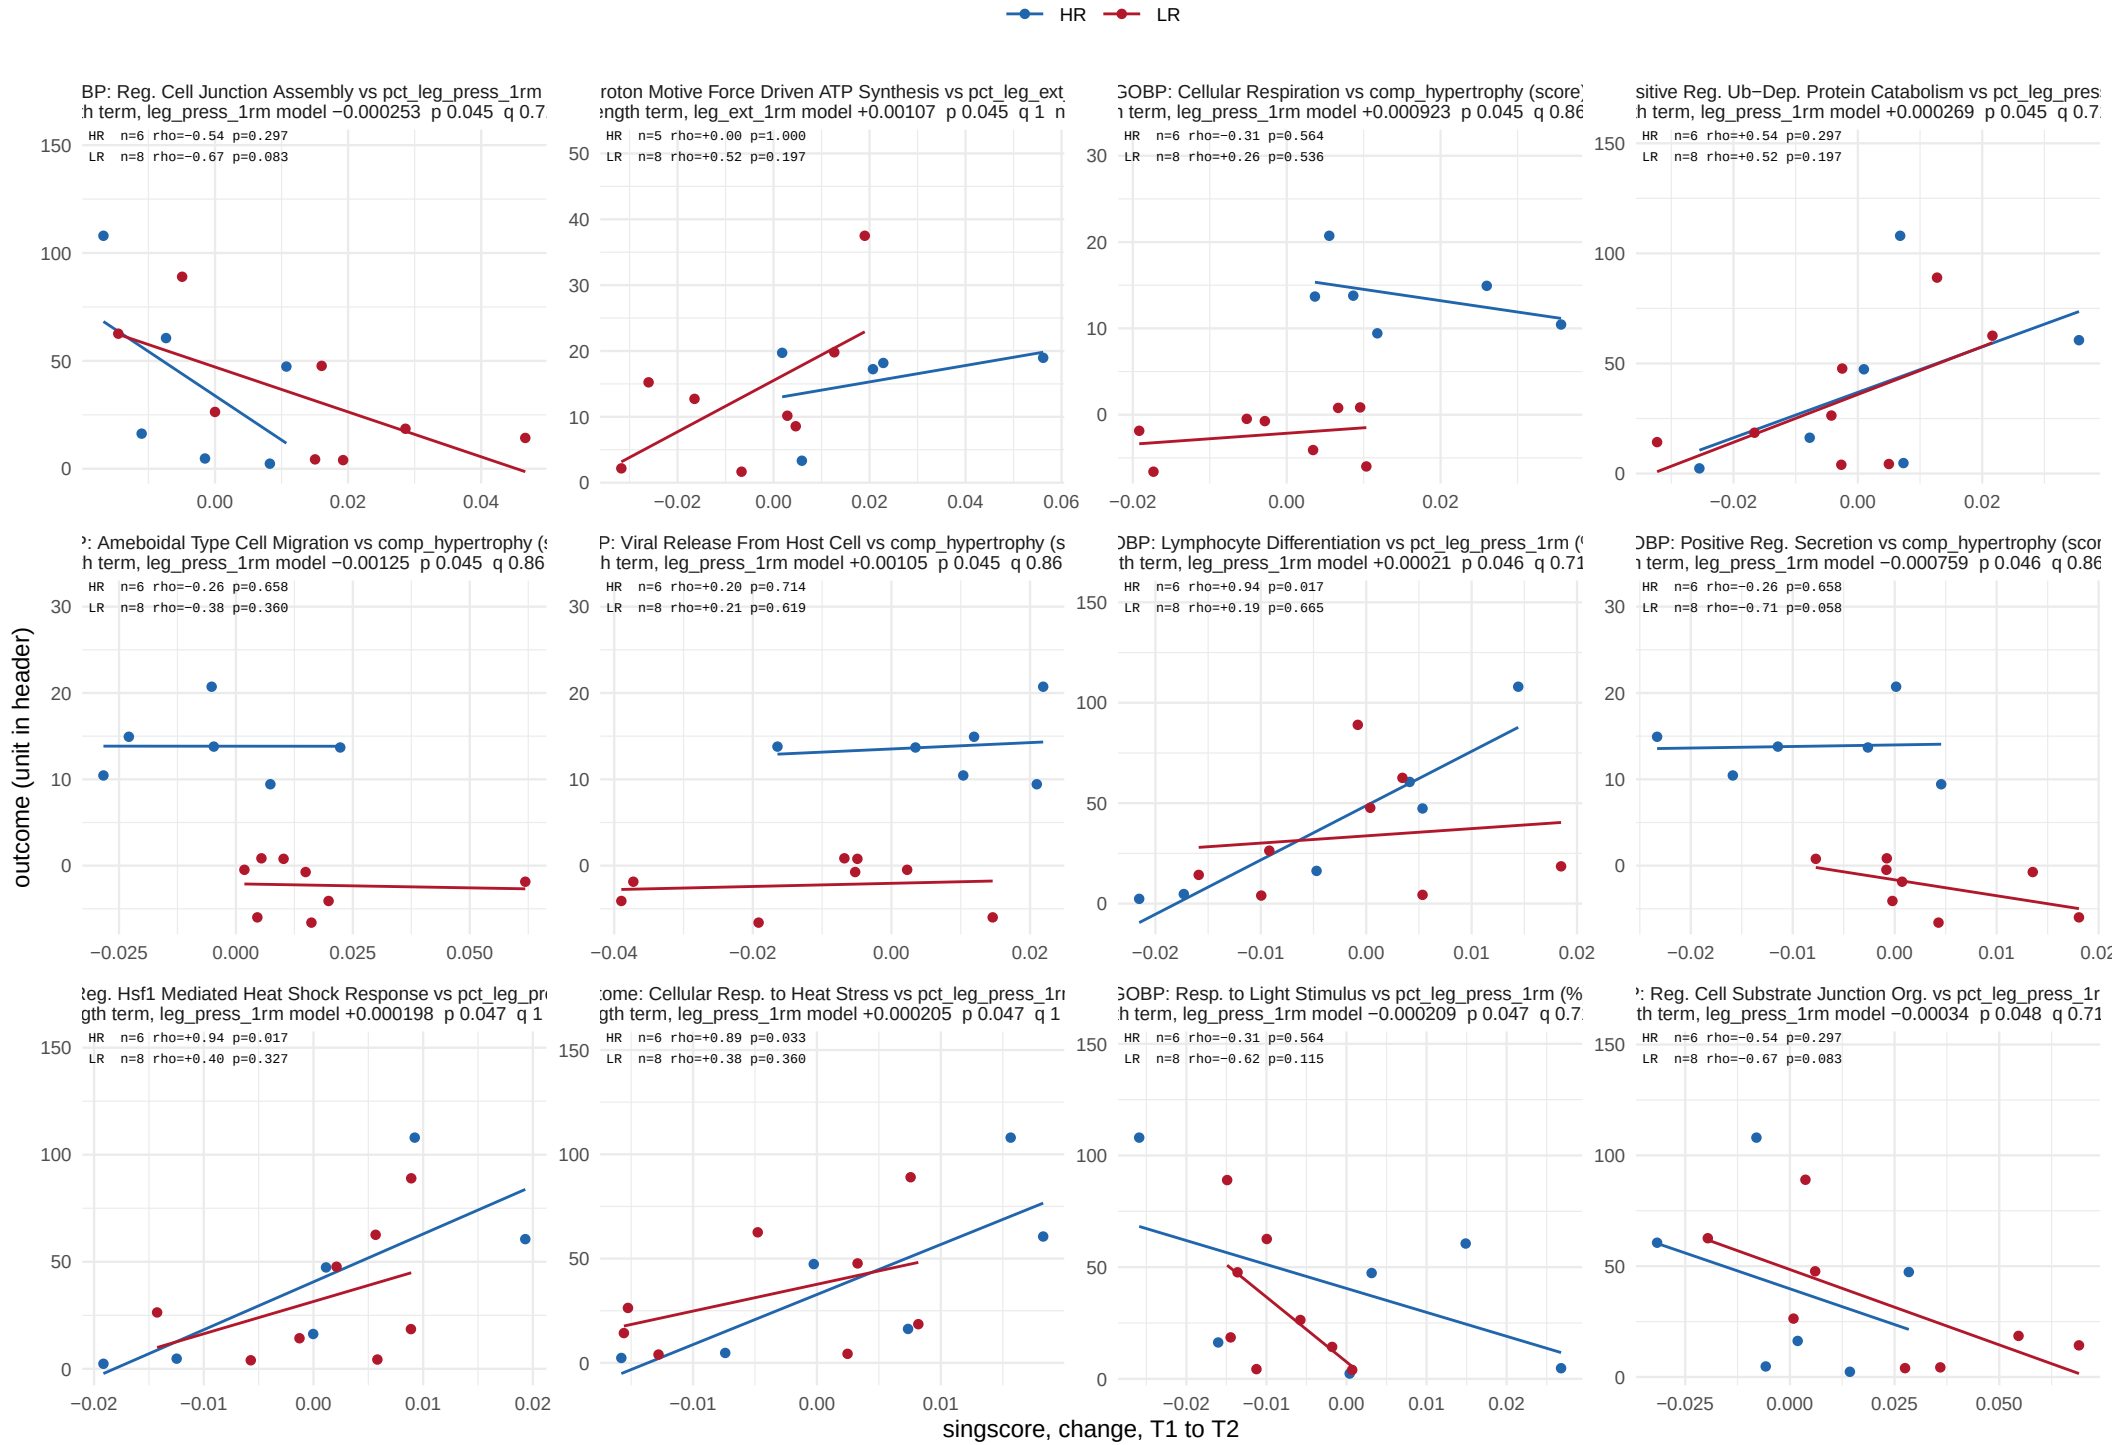

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, two_predictor.

Two predictor, training window


169 of 5512 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 14 of 15.

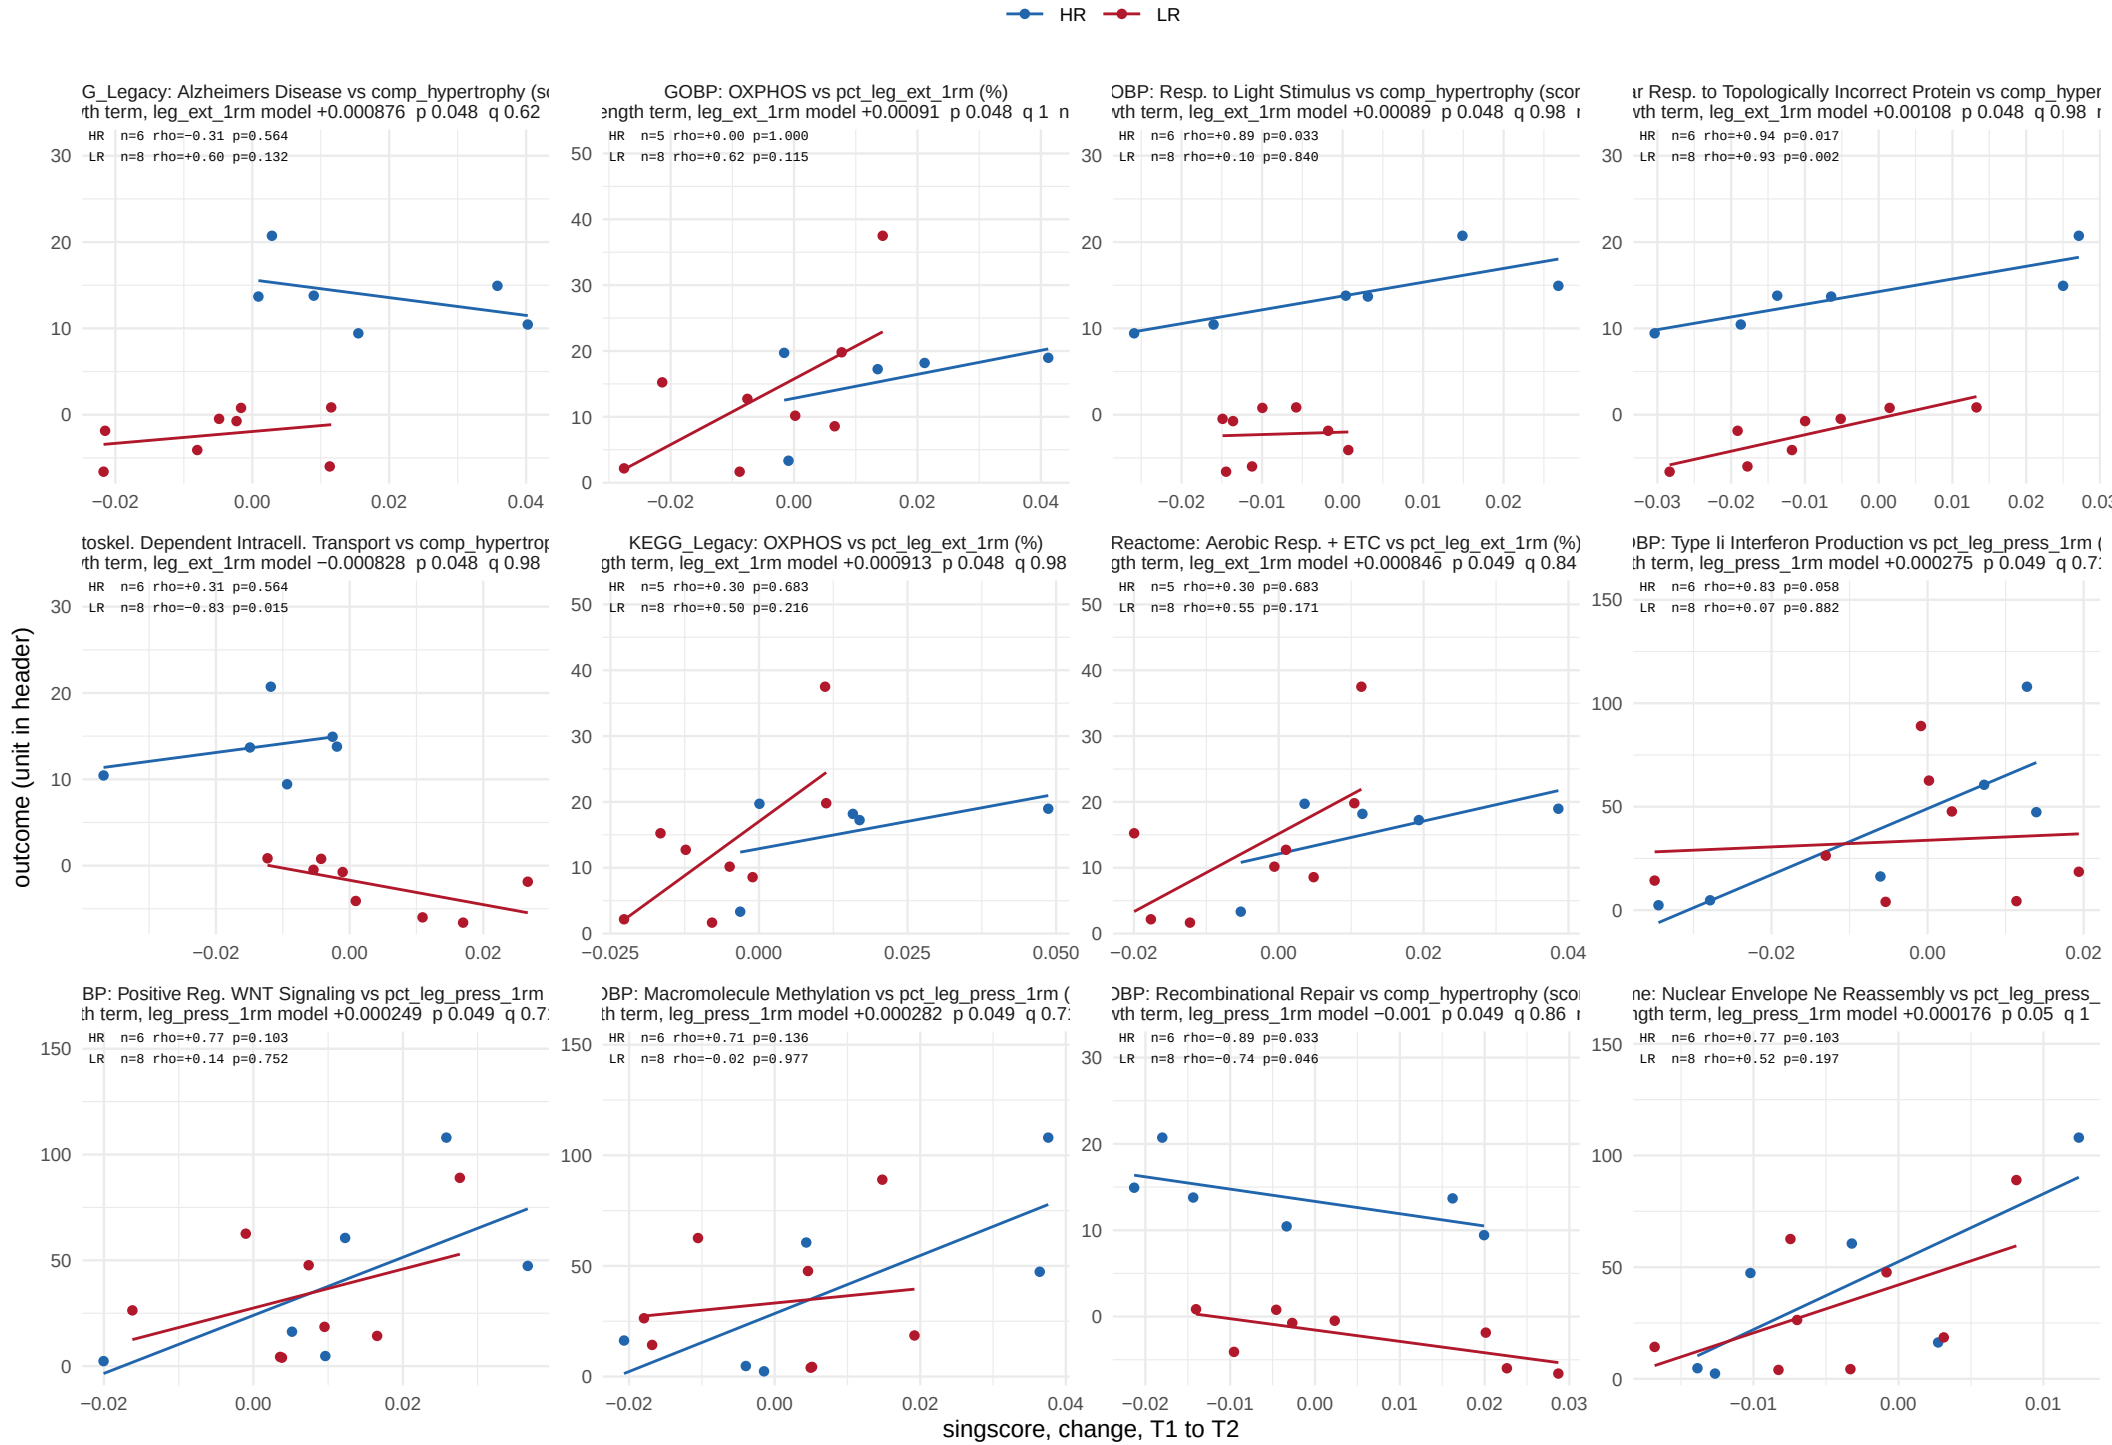

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, two_predictor.

Two predictor, training window


169 of 5512 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 15 of 15.

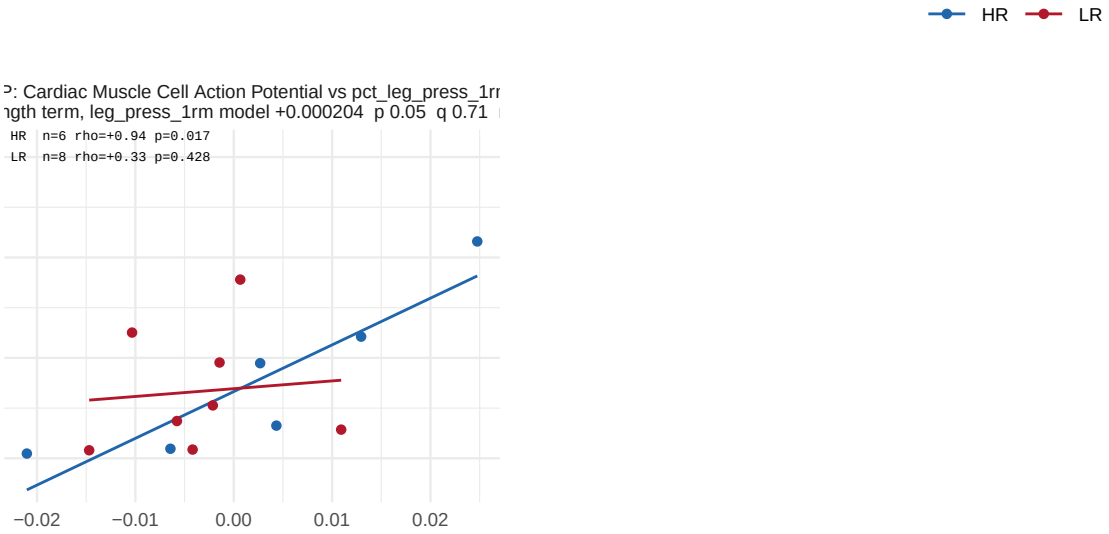

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, two_predictor.

Two predictor, baseline window


321 of 5512 feature−outcome pairs at p < 0.05, 6 at BH < 0.05. Page 1 of 27.

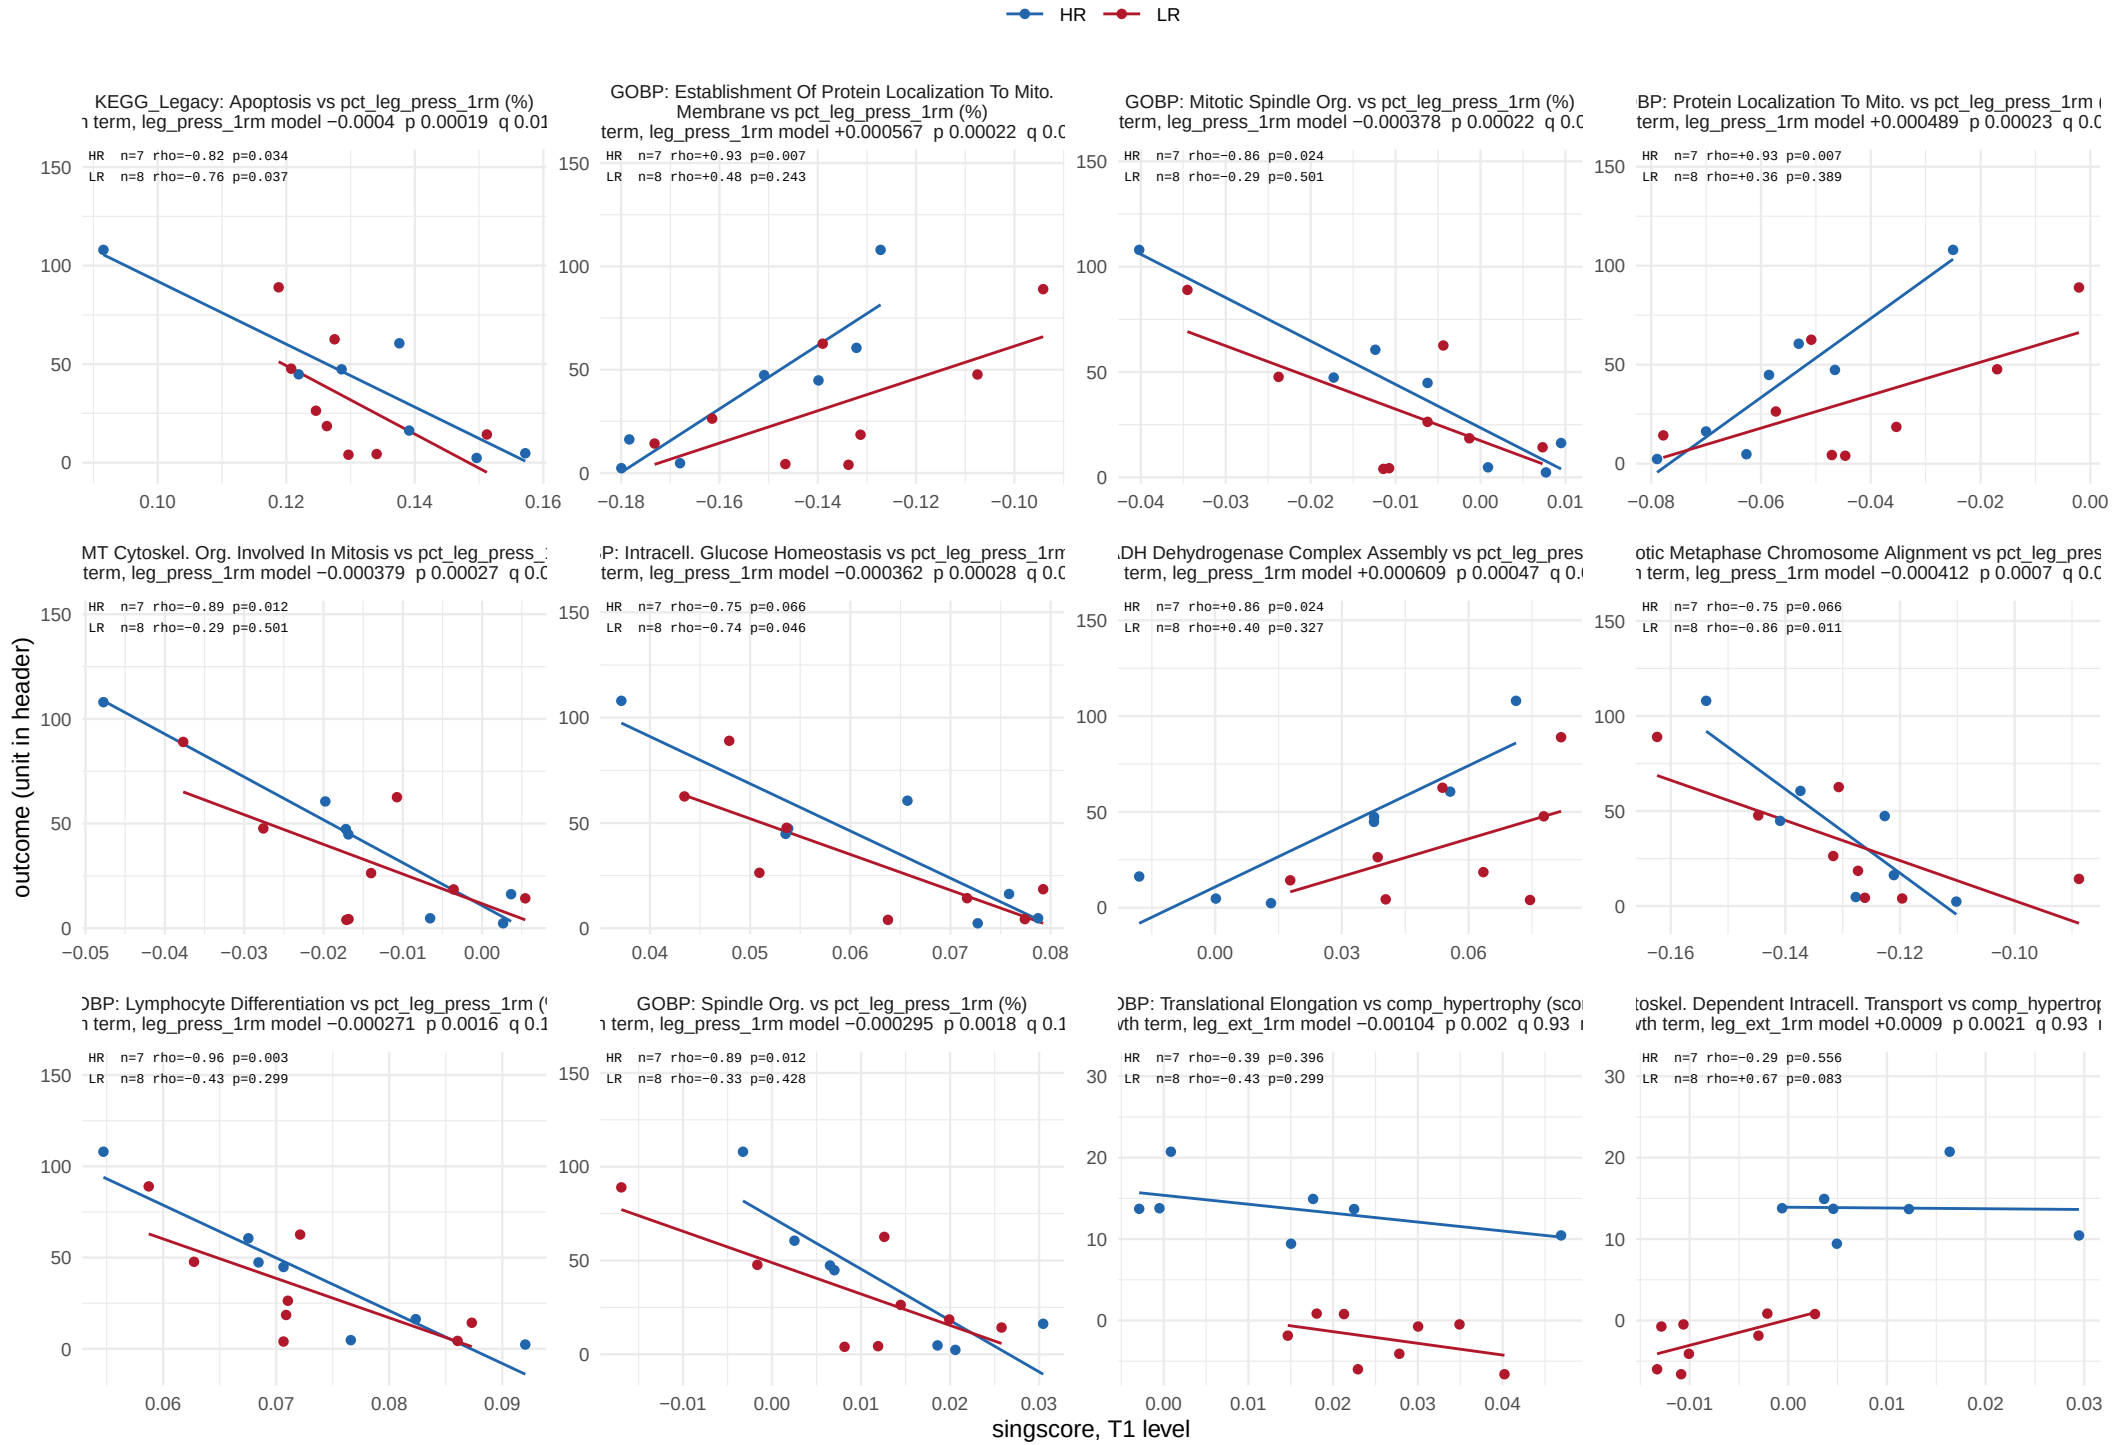

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, two_predictor.

Two predictor, baseline window


321 of 5512 feature−outcome pairs at p < 0.05, 6 at BH < 0.05. Page 2 of 27.

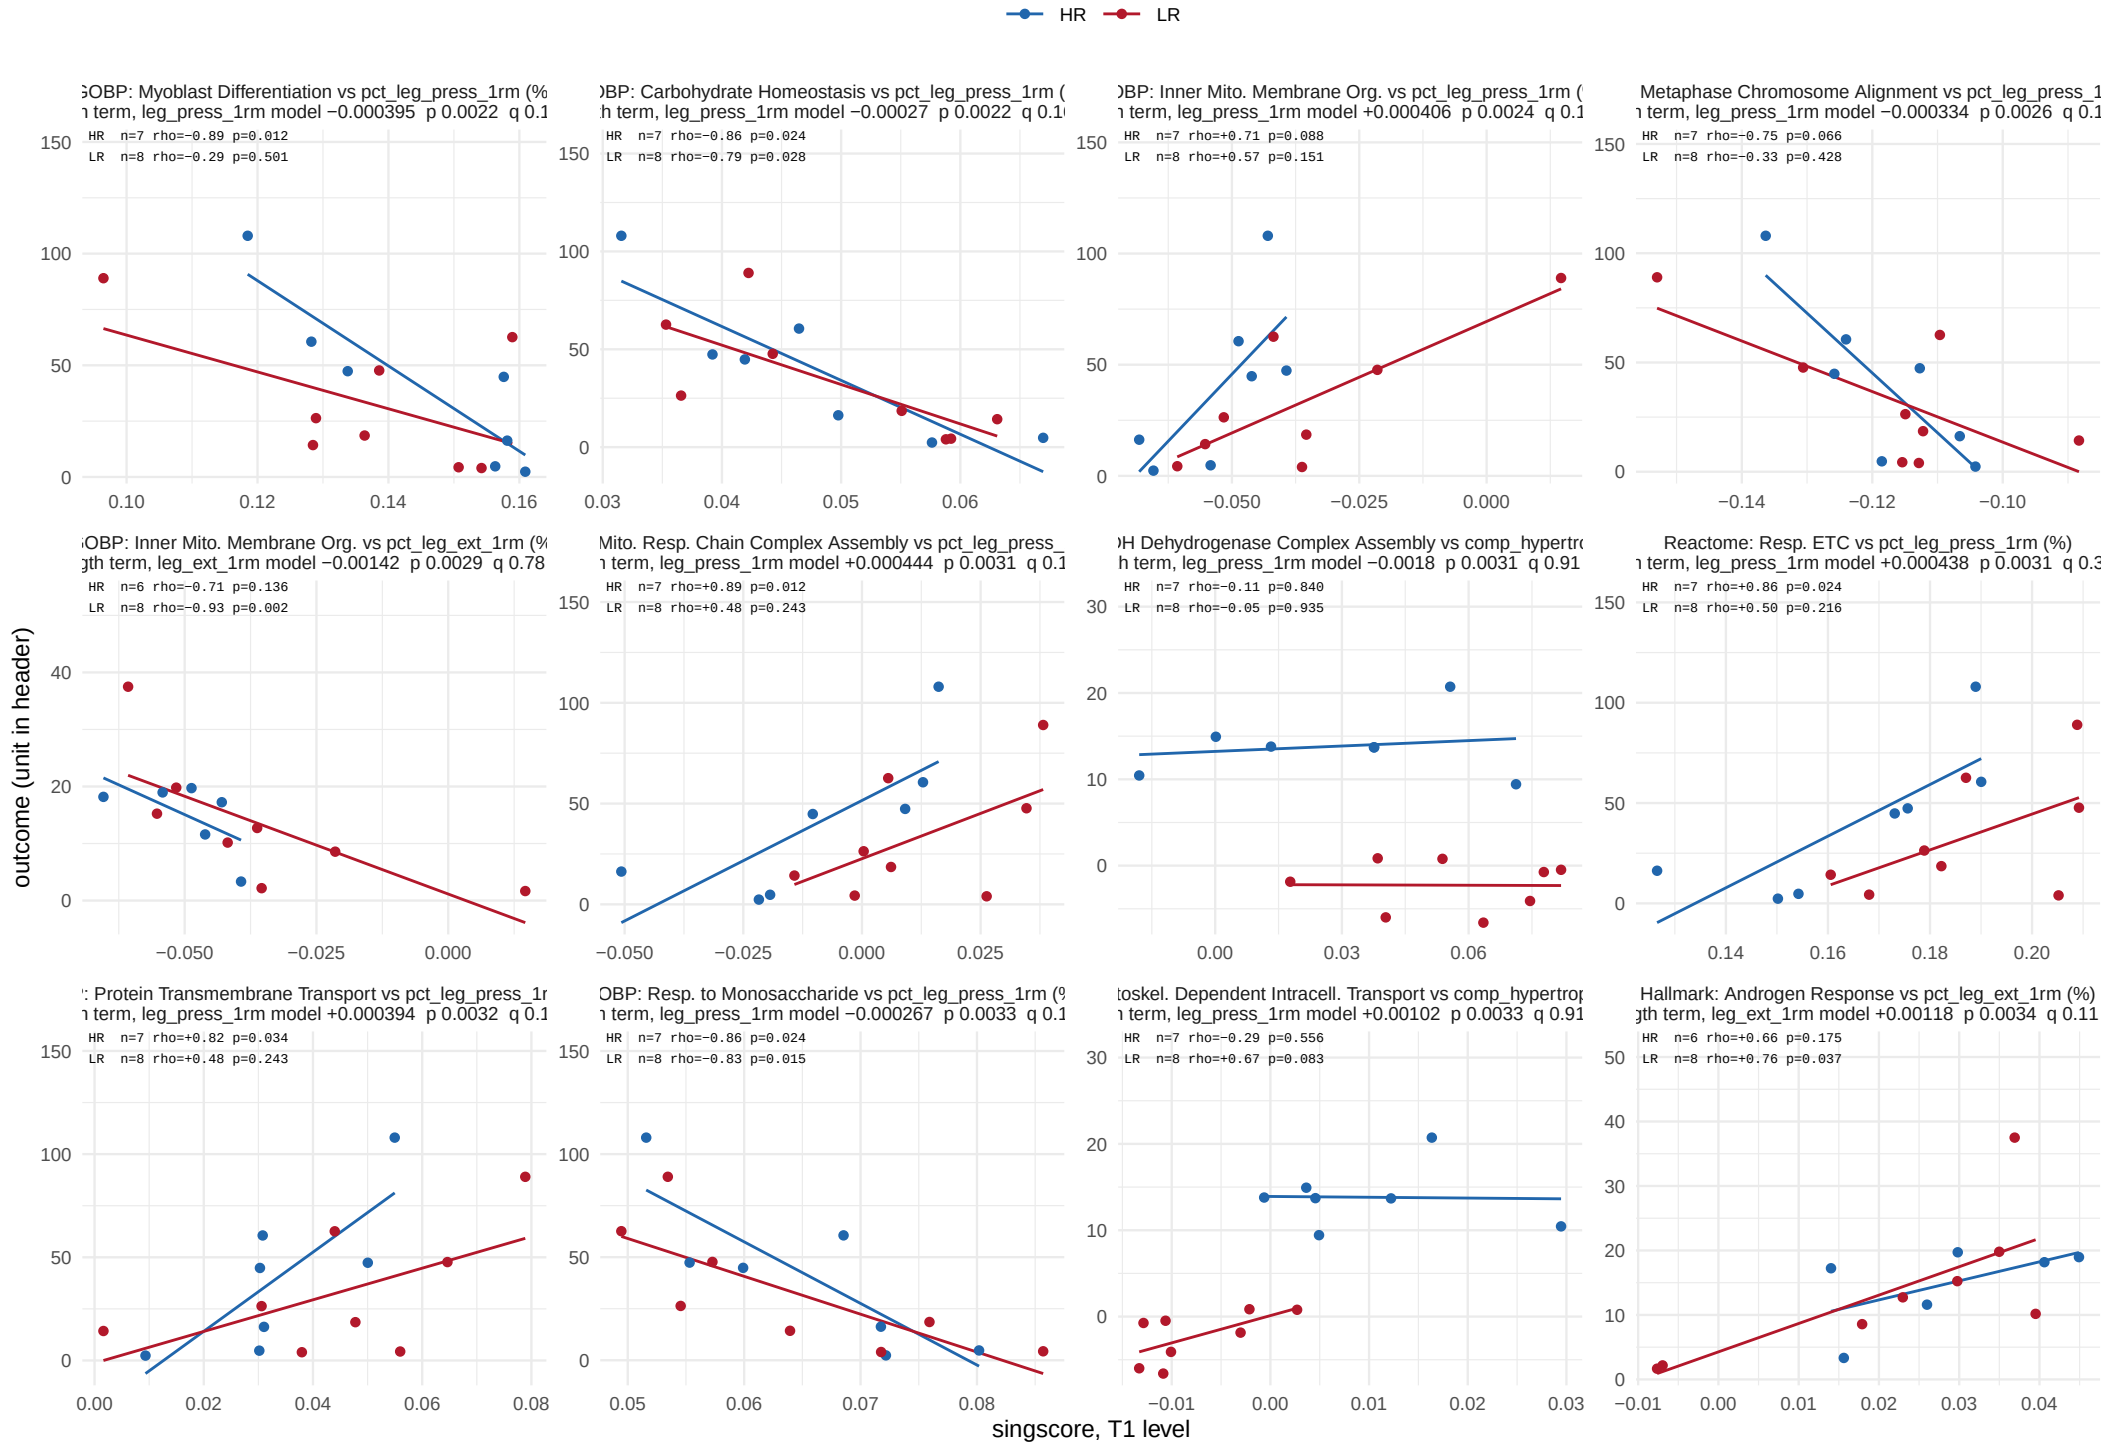

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, two_predictor.

Two predictor, baseline window


321 of 5512 feature−outcome pairs at p < 0.05, 6 at BH < 0.05. Page 3 of 27.

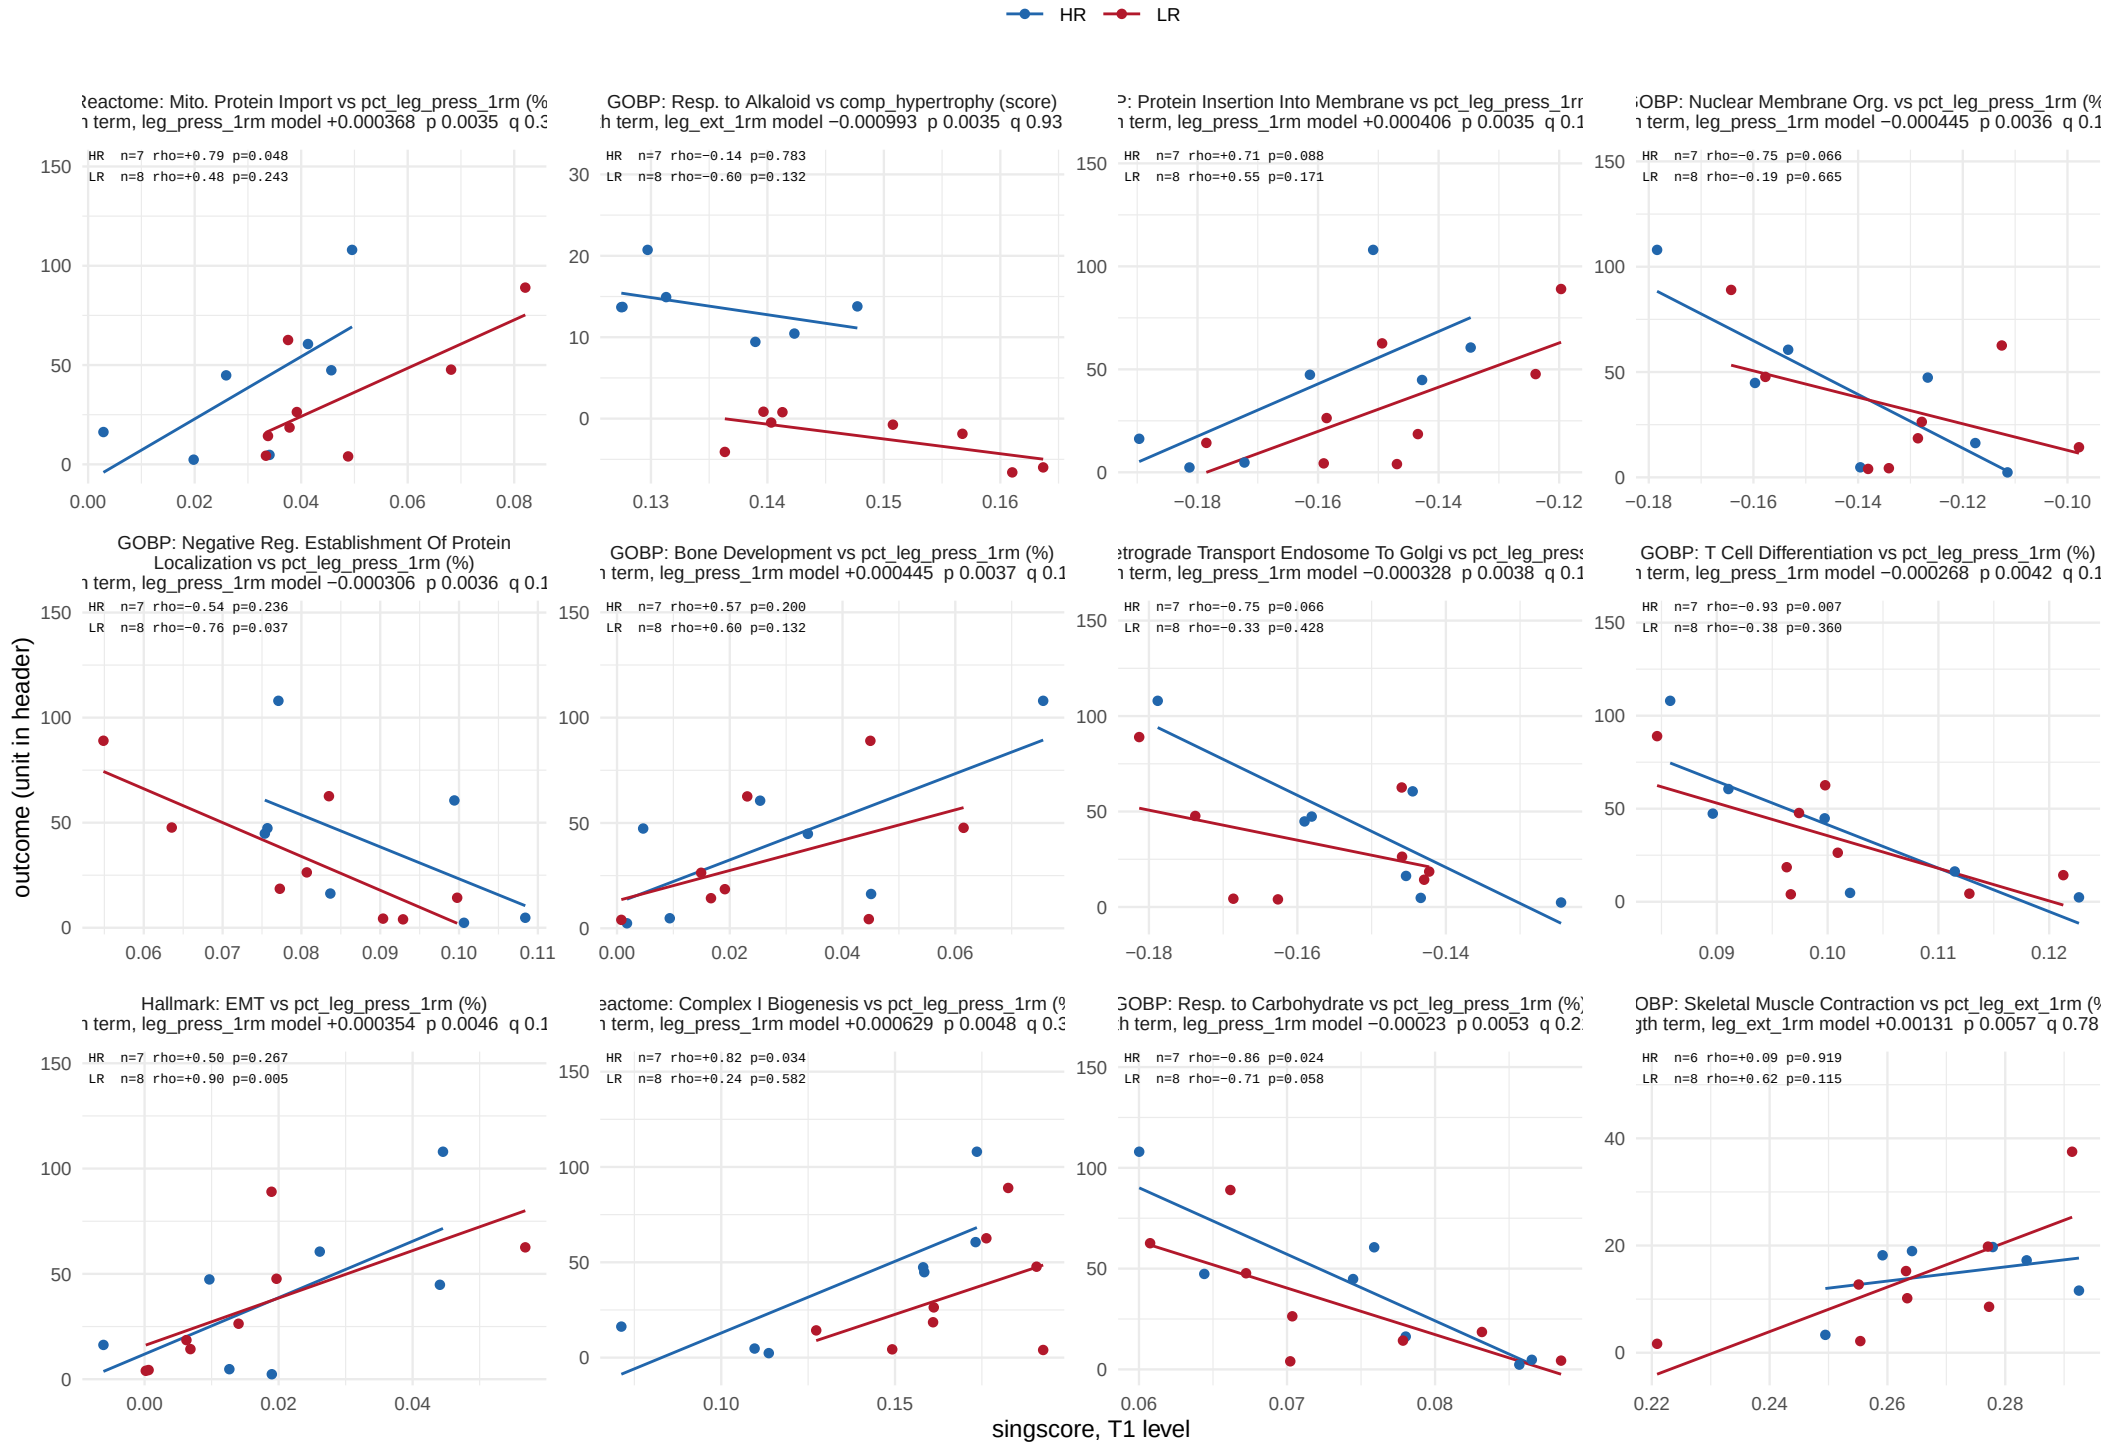

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, two_predictor.

Two predictor, baseline window


321 of 5512 feature−outcome pairs at p < 0.05, 6 at BH < 0.05. Page 4 of 27.

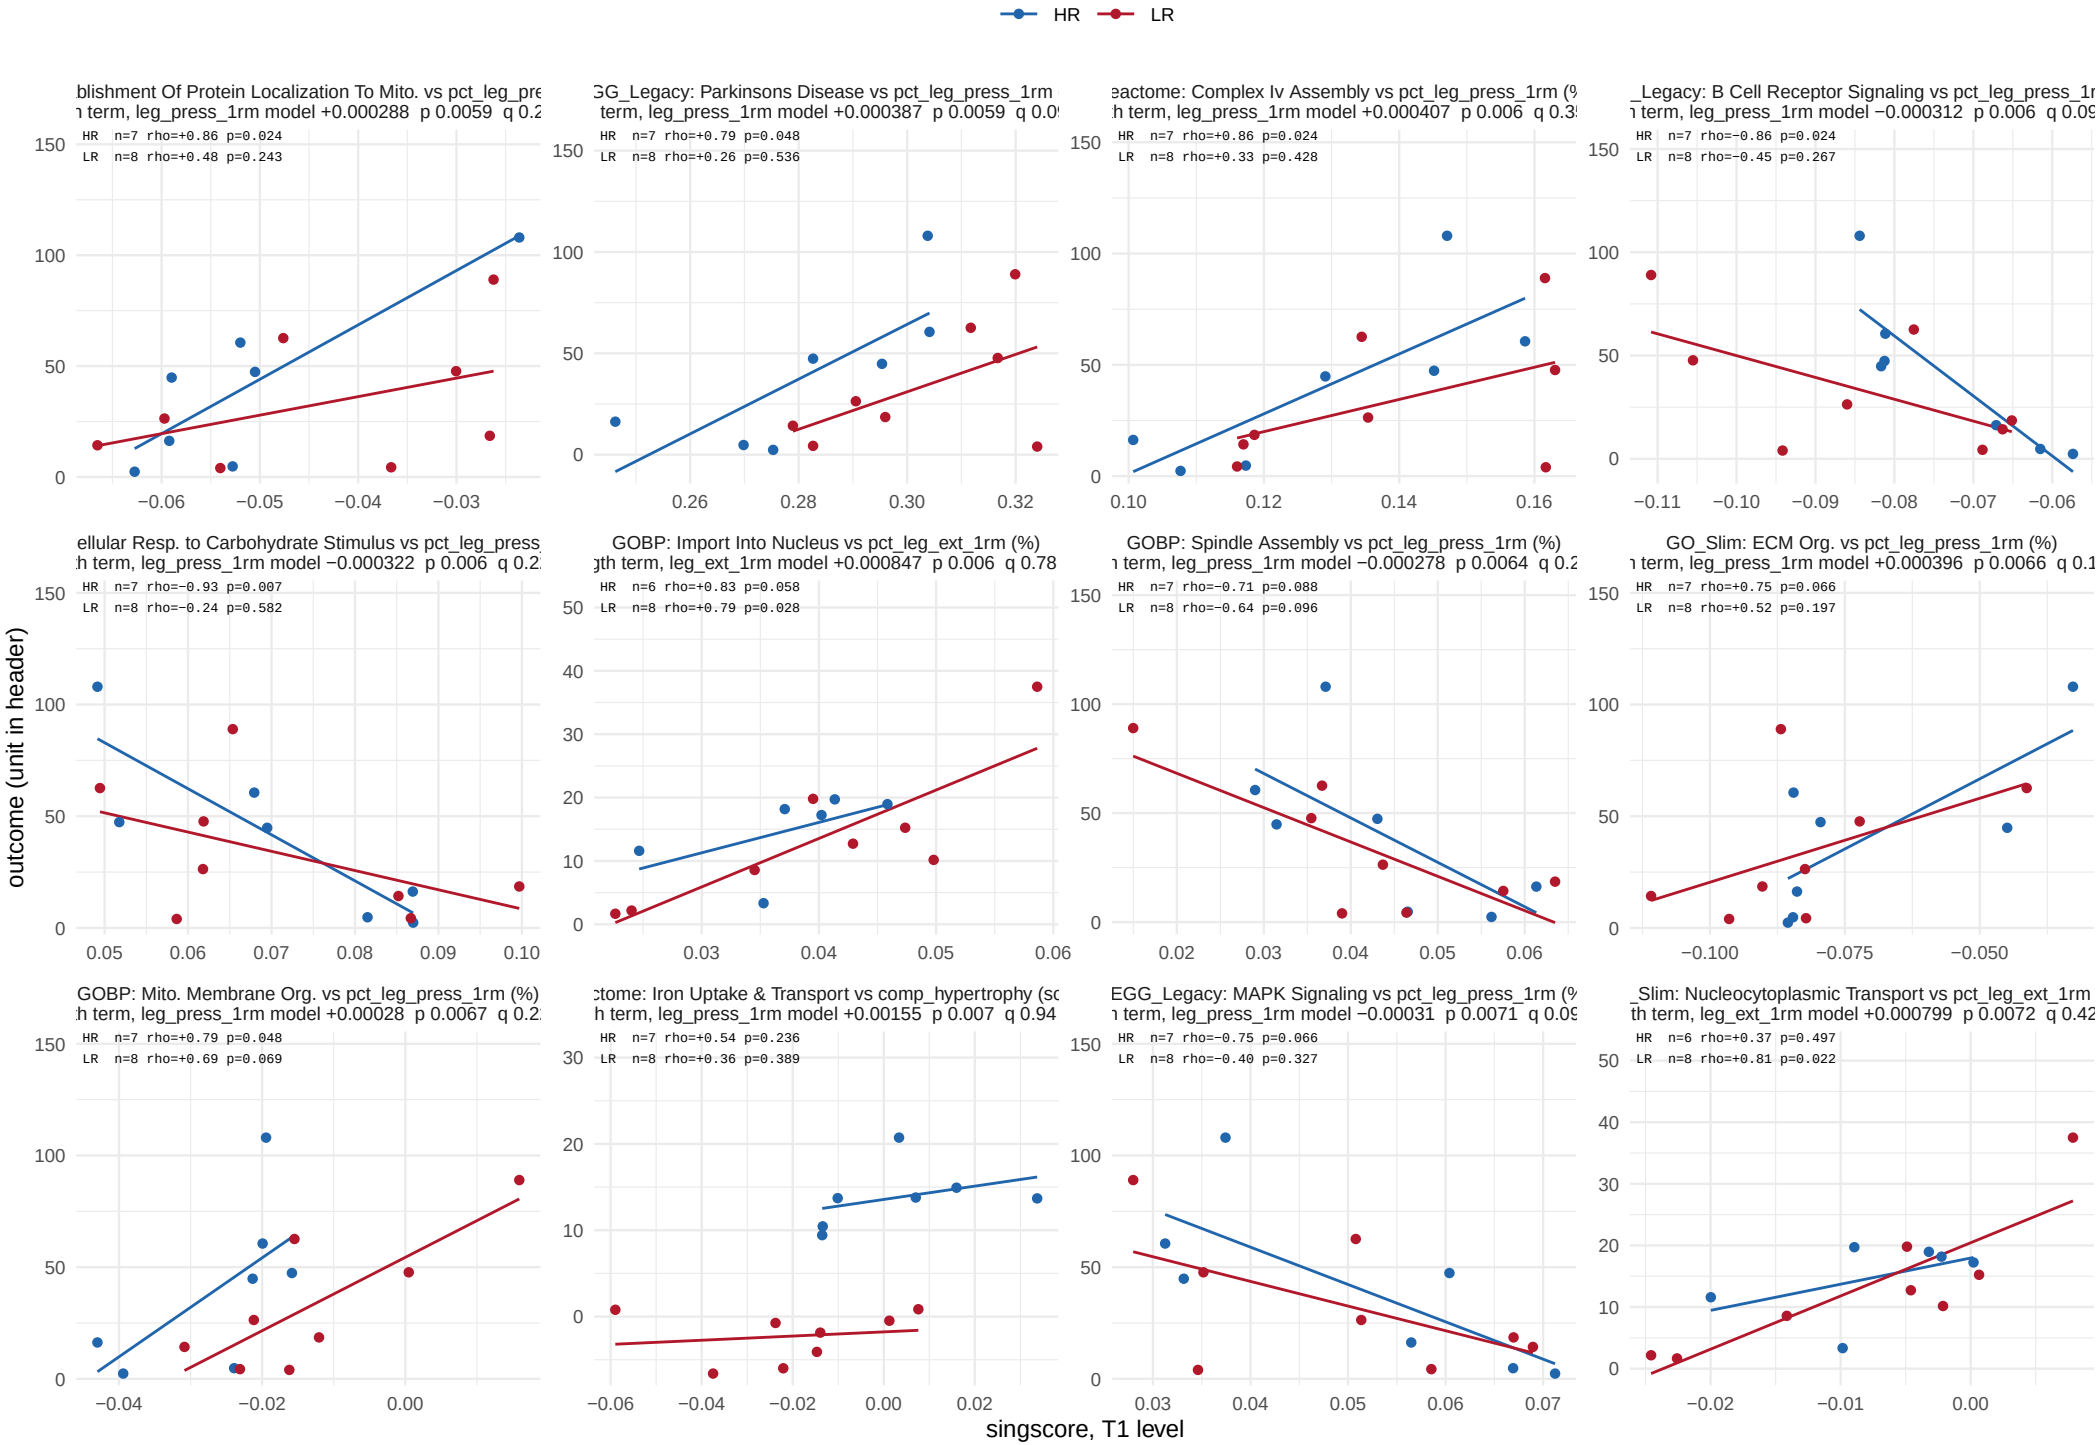

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, two_predictor.

Two predictor, baseline window


321 of 5512 feature−outcome pairs at p < 0.05, 6 at BH < 0.05. Page 5 of 27.

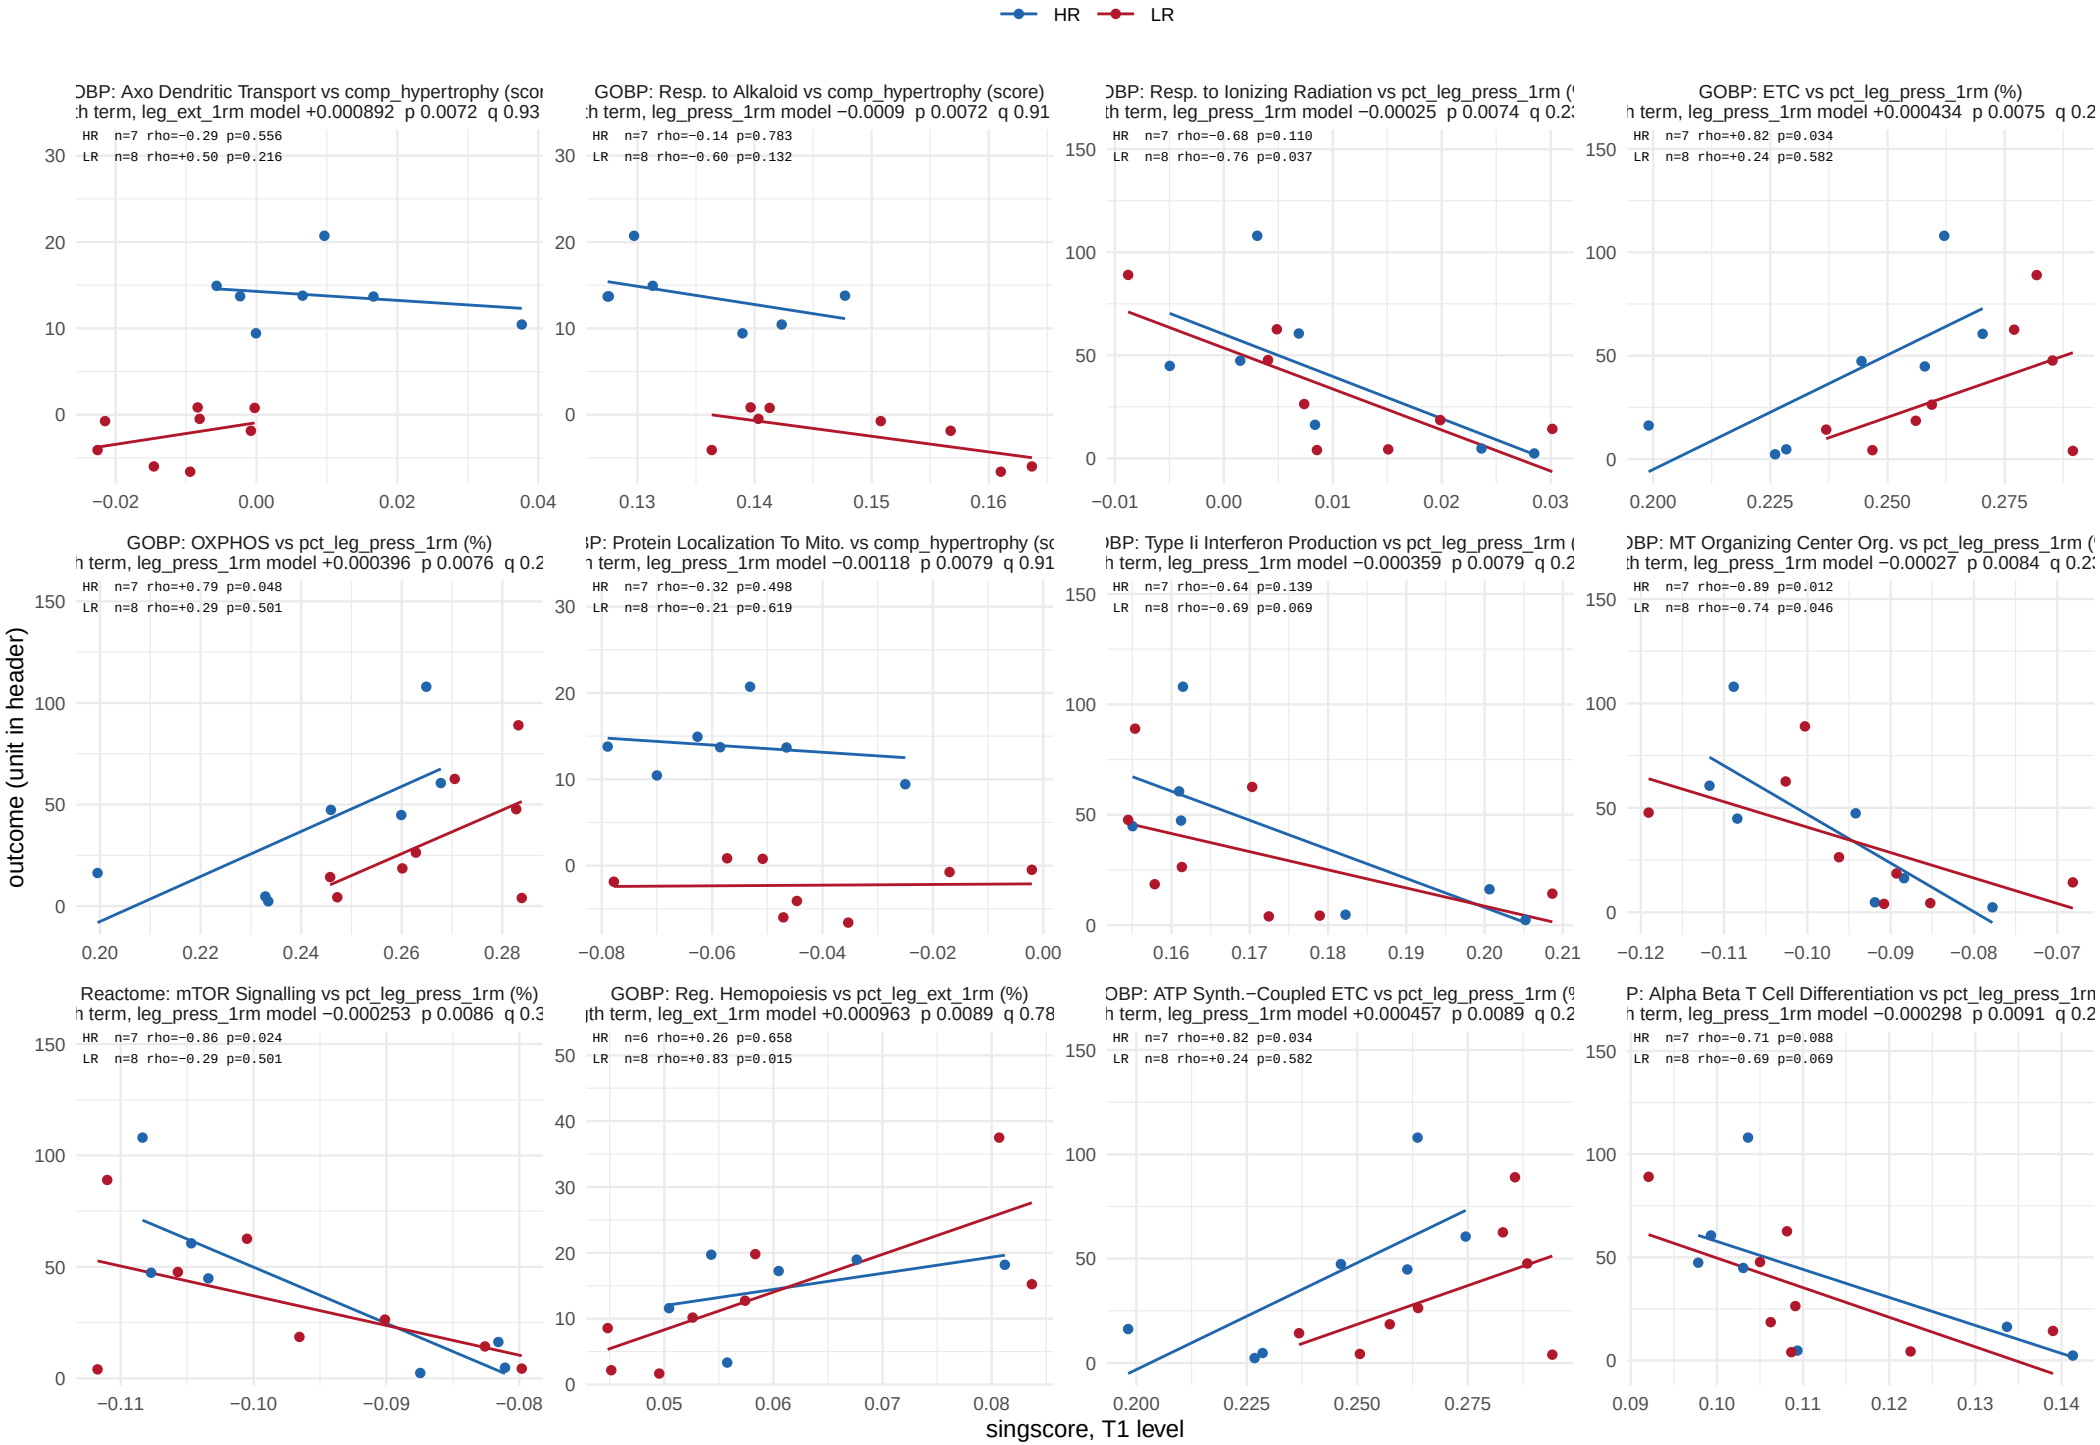

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, two_predictor.

Two predictor, baseline window


321 of 5512 feature−outcome pairs at p < 0.05, 6 at BH < 0.05. Page 6 of 27.

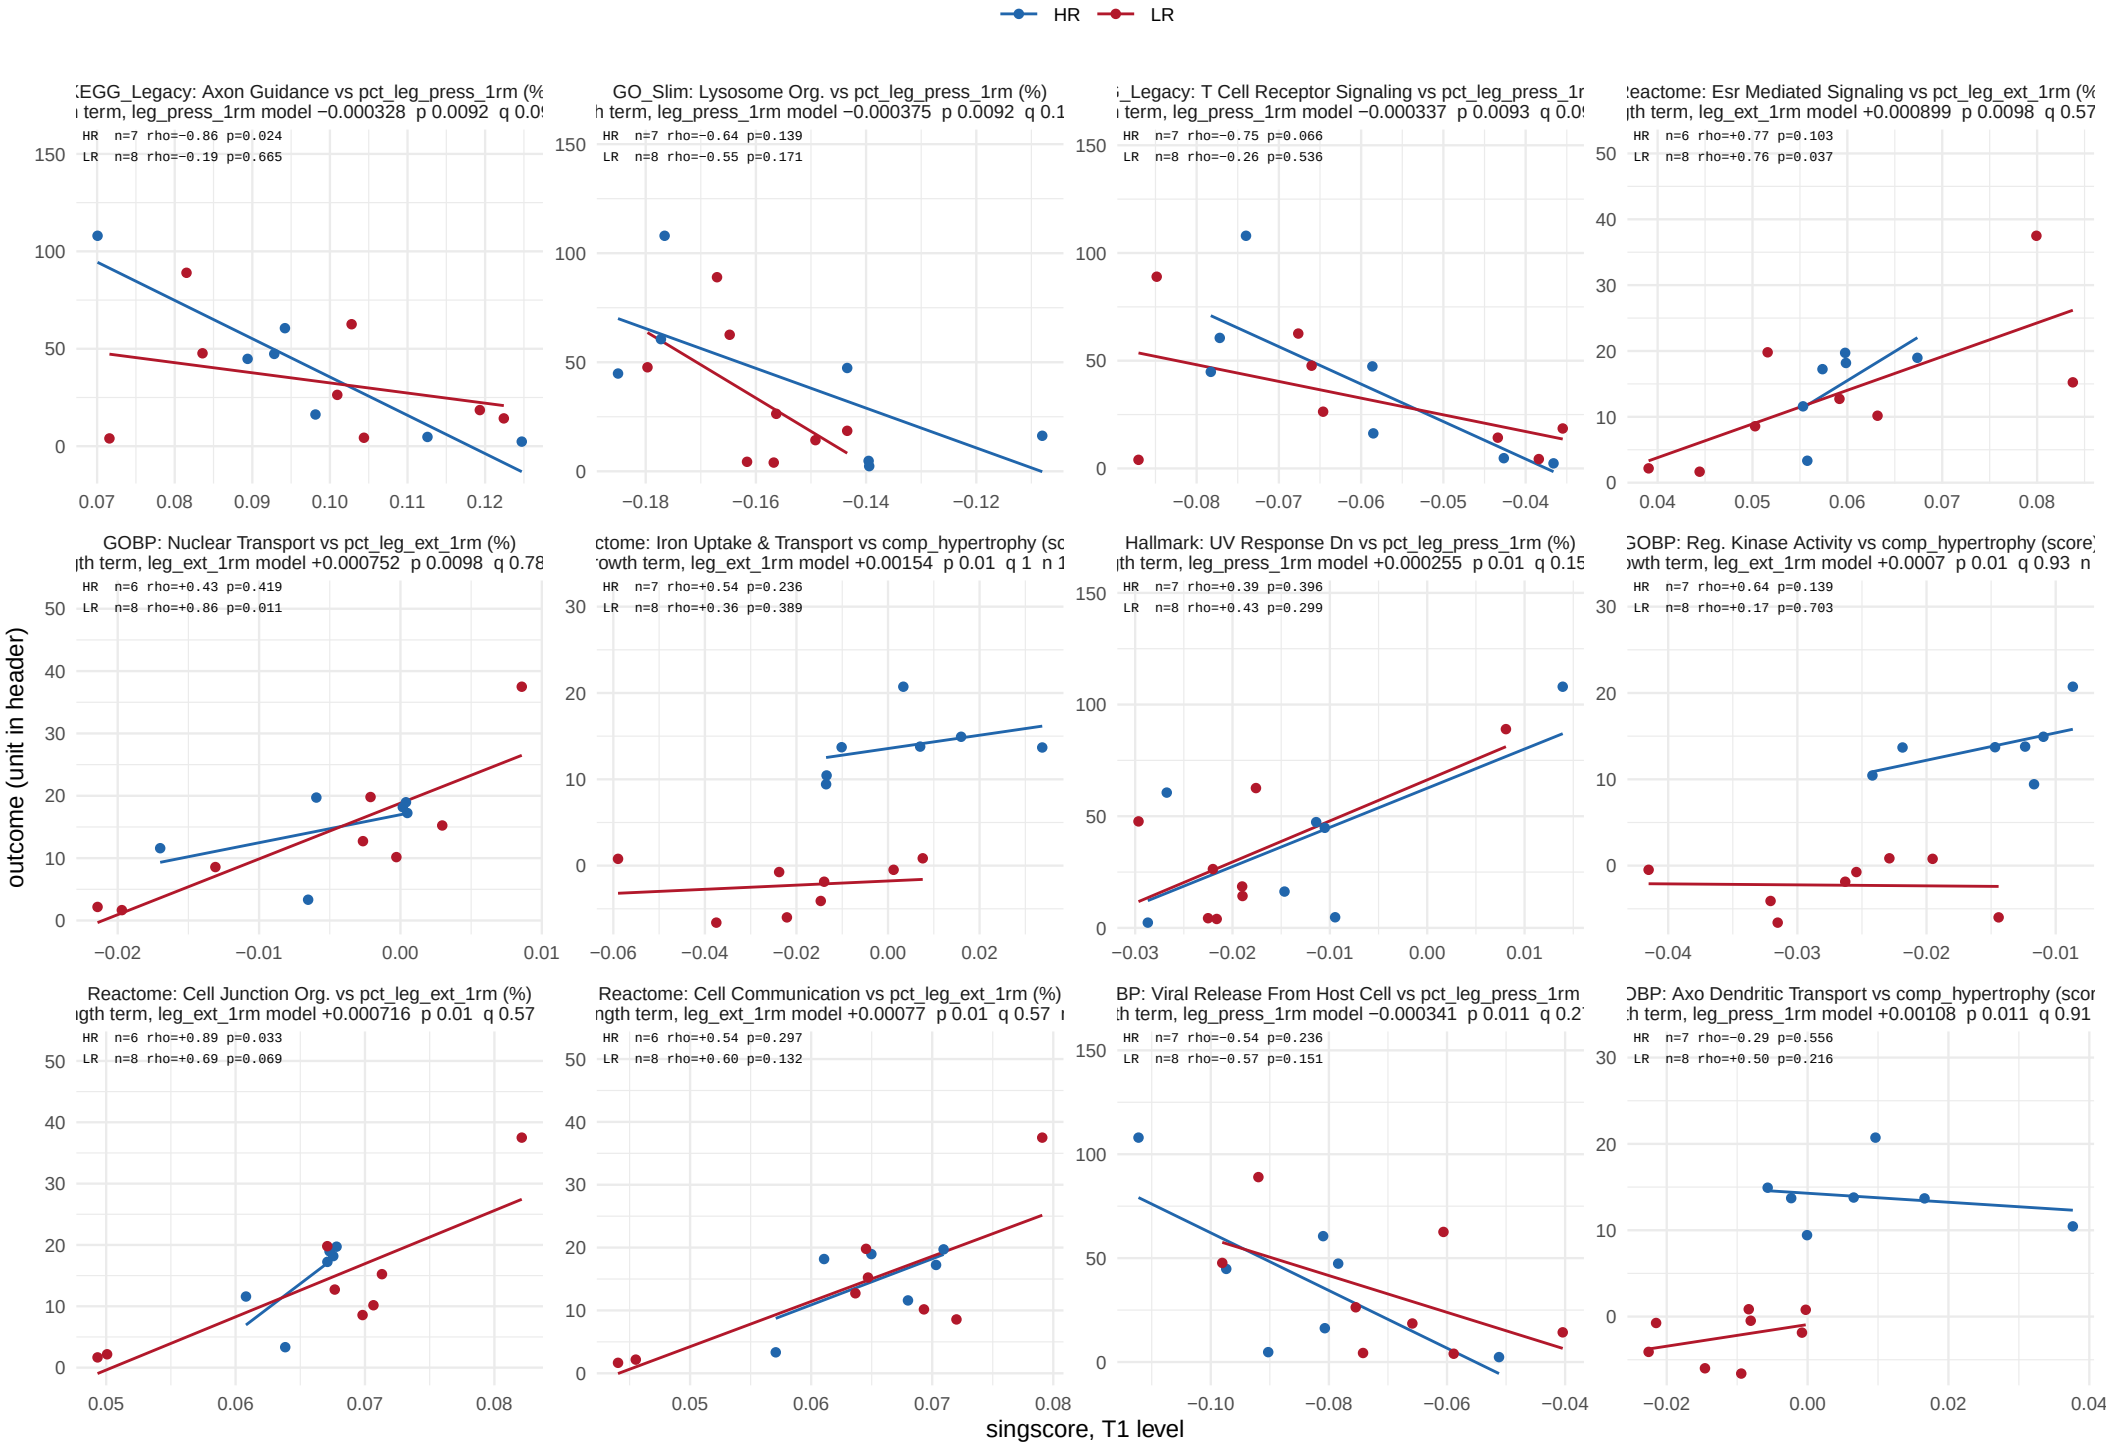

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, two_predictor.

Two predictor, baseline window


321 of 5512 feature−outcome pairs at p < 0.05, 6 at BH < 0.05. Page 7 of 27.

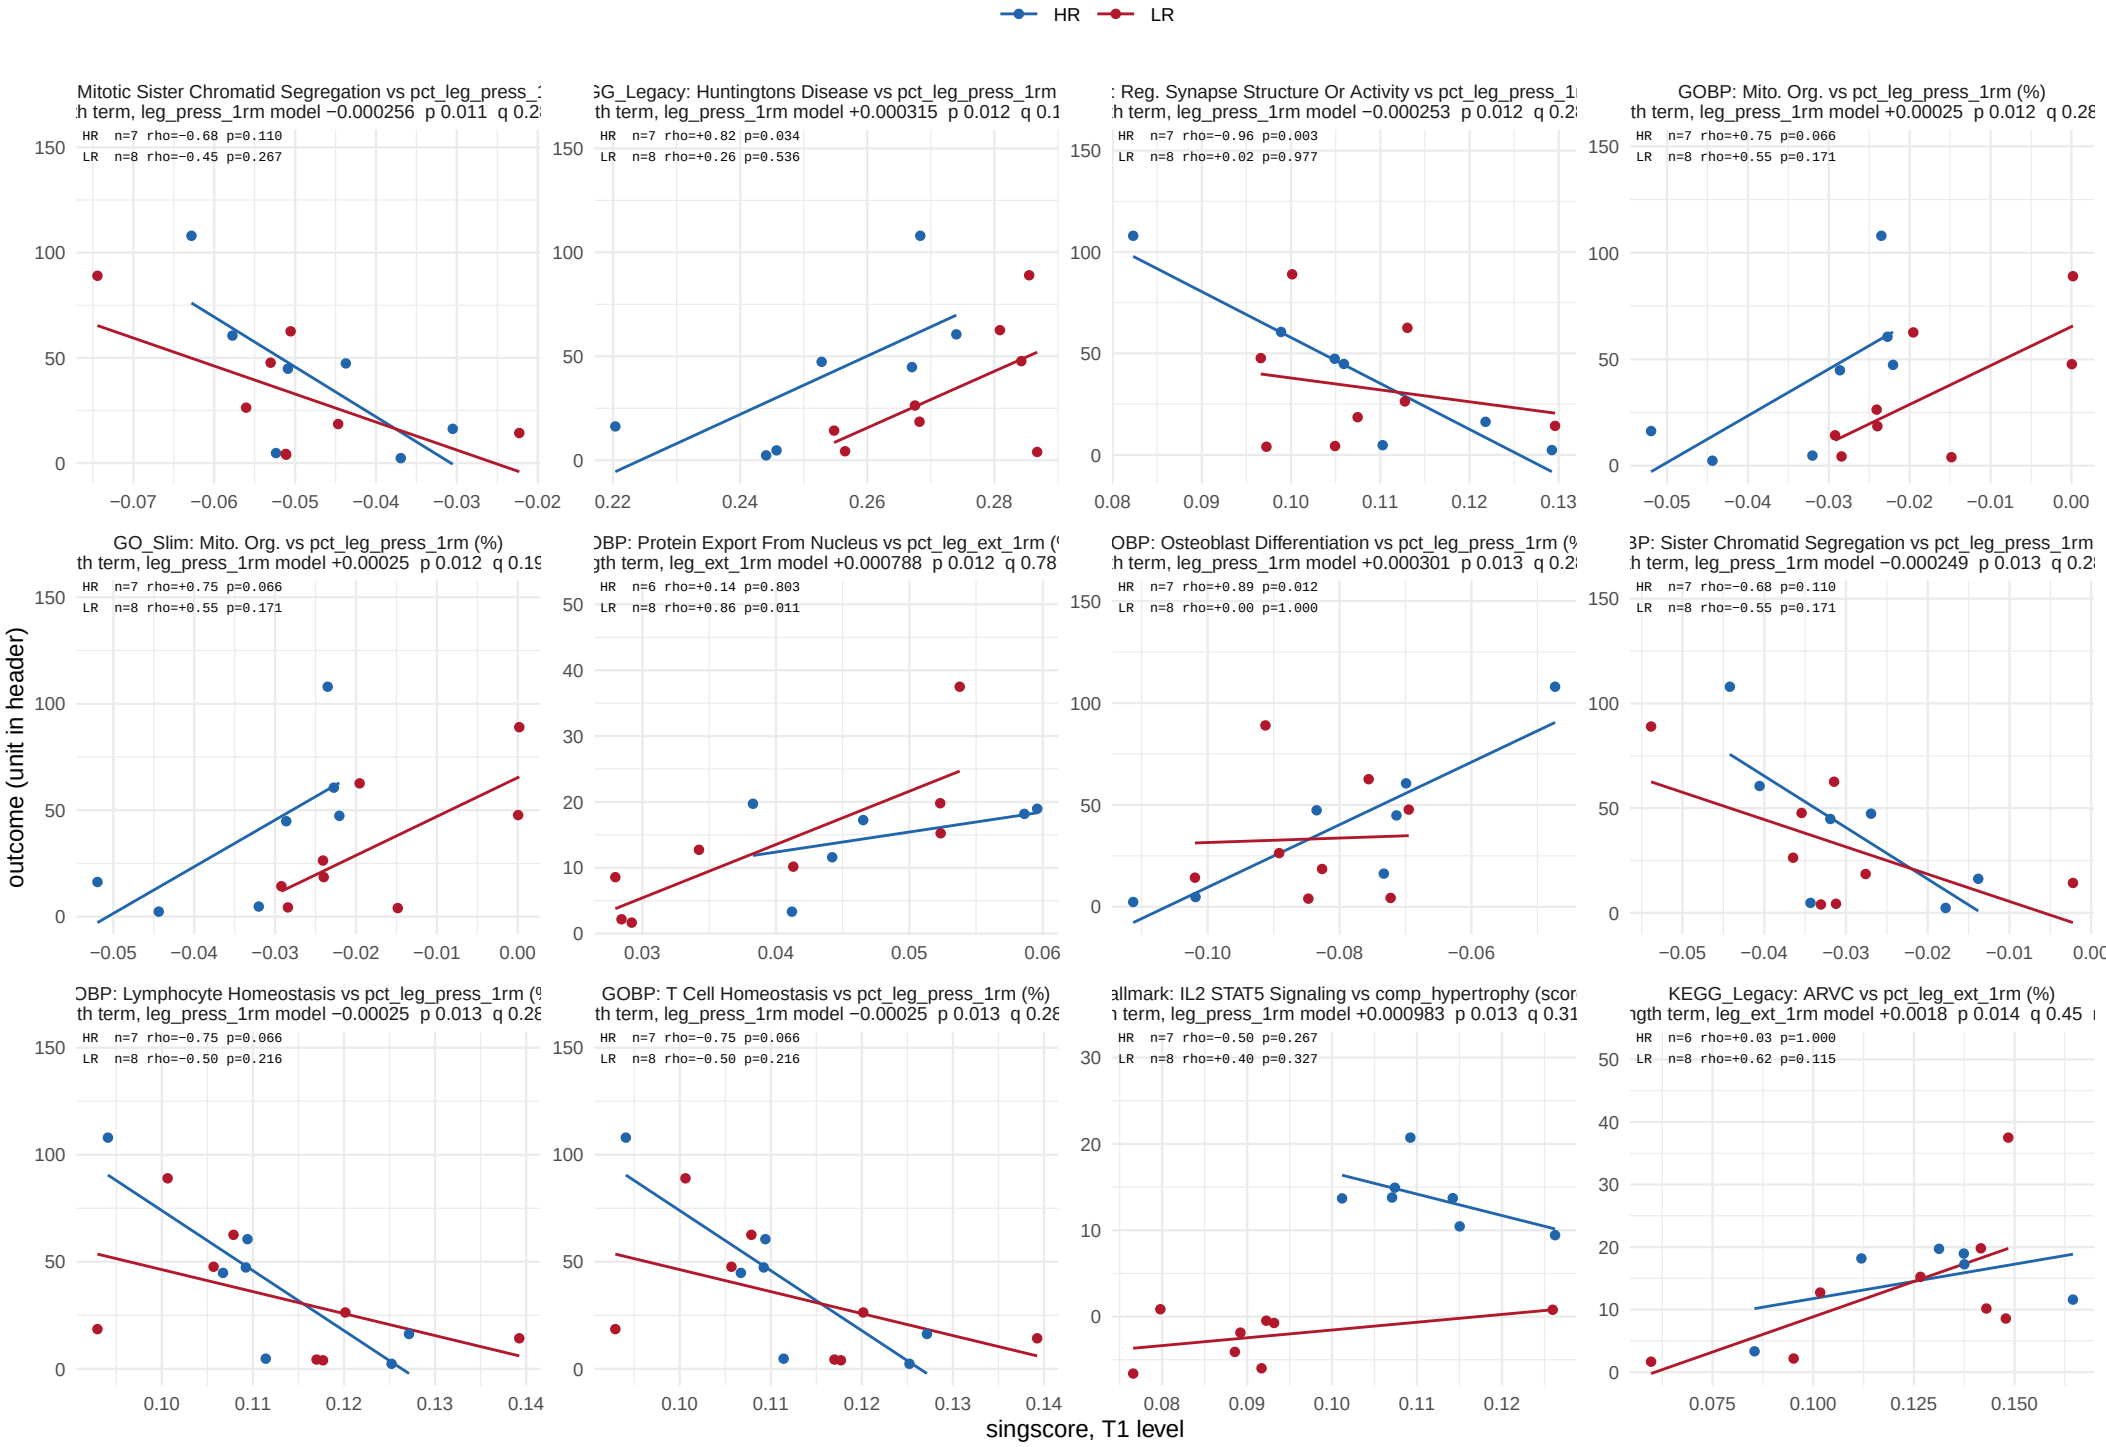

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, two_predictor.

Two predictor, baseline window


321 of 5512 feature−outcome pairs at p < 0.05, 6 at BH < 0.05. Page 8 of 27.

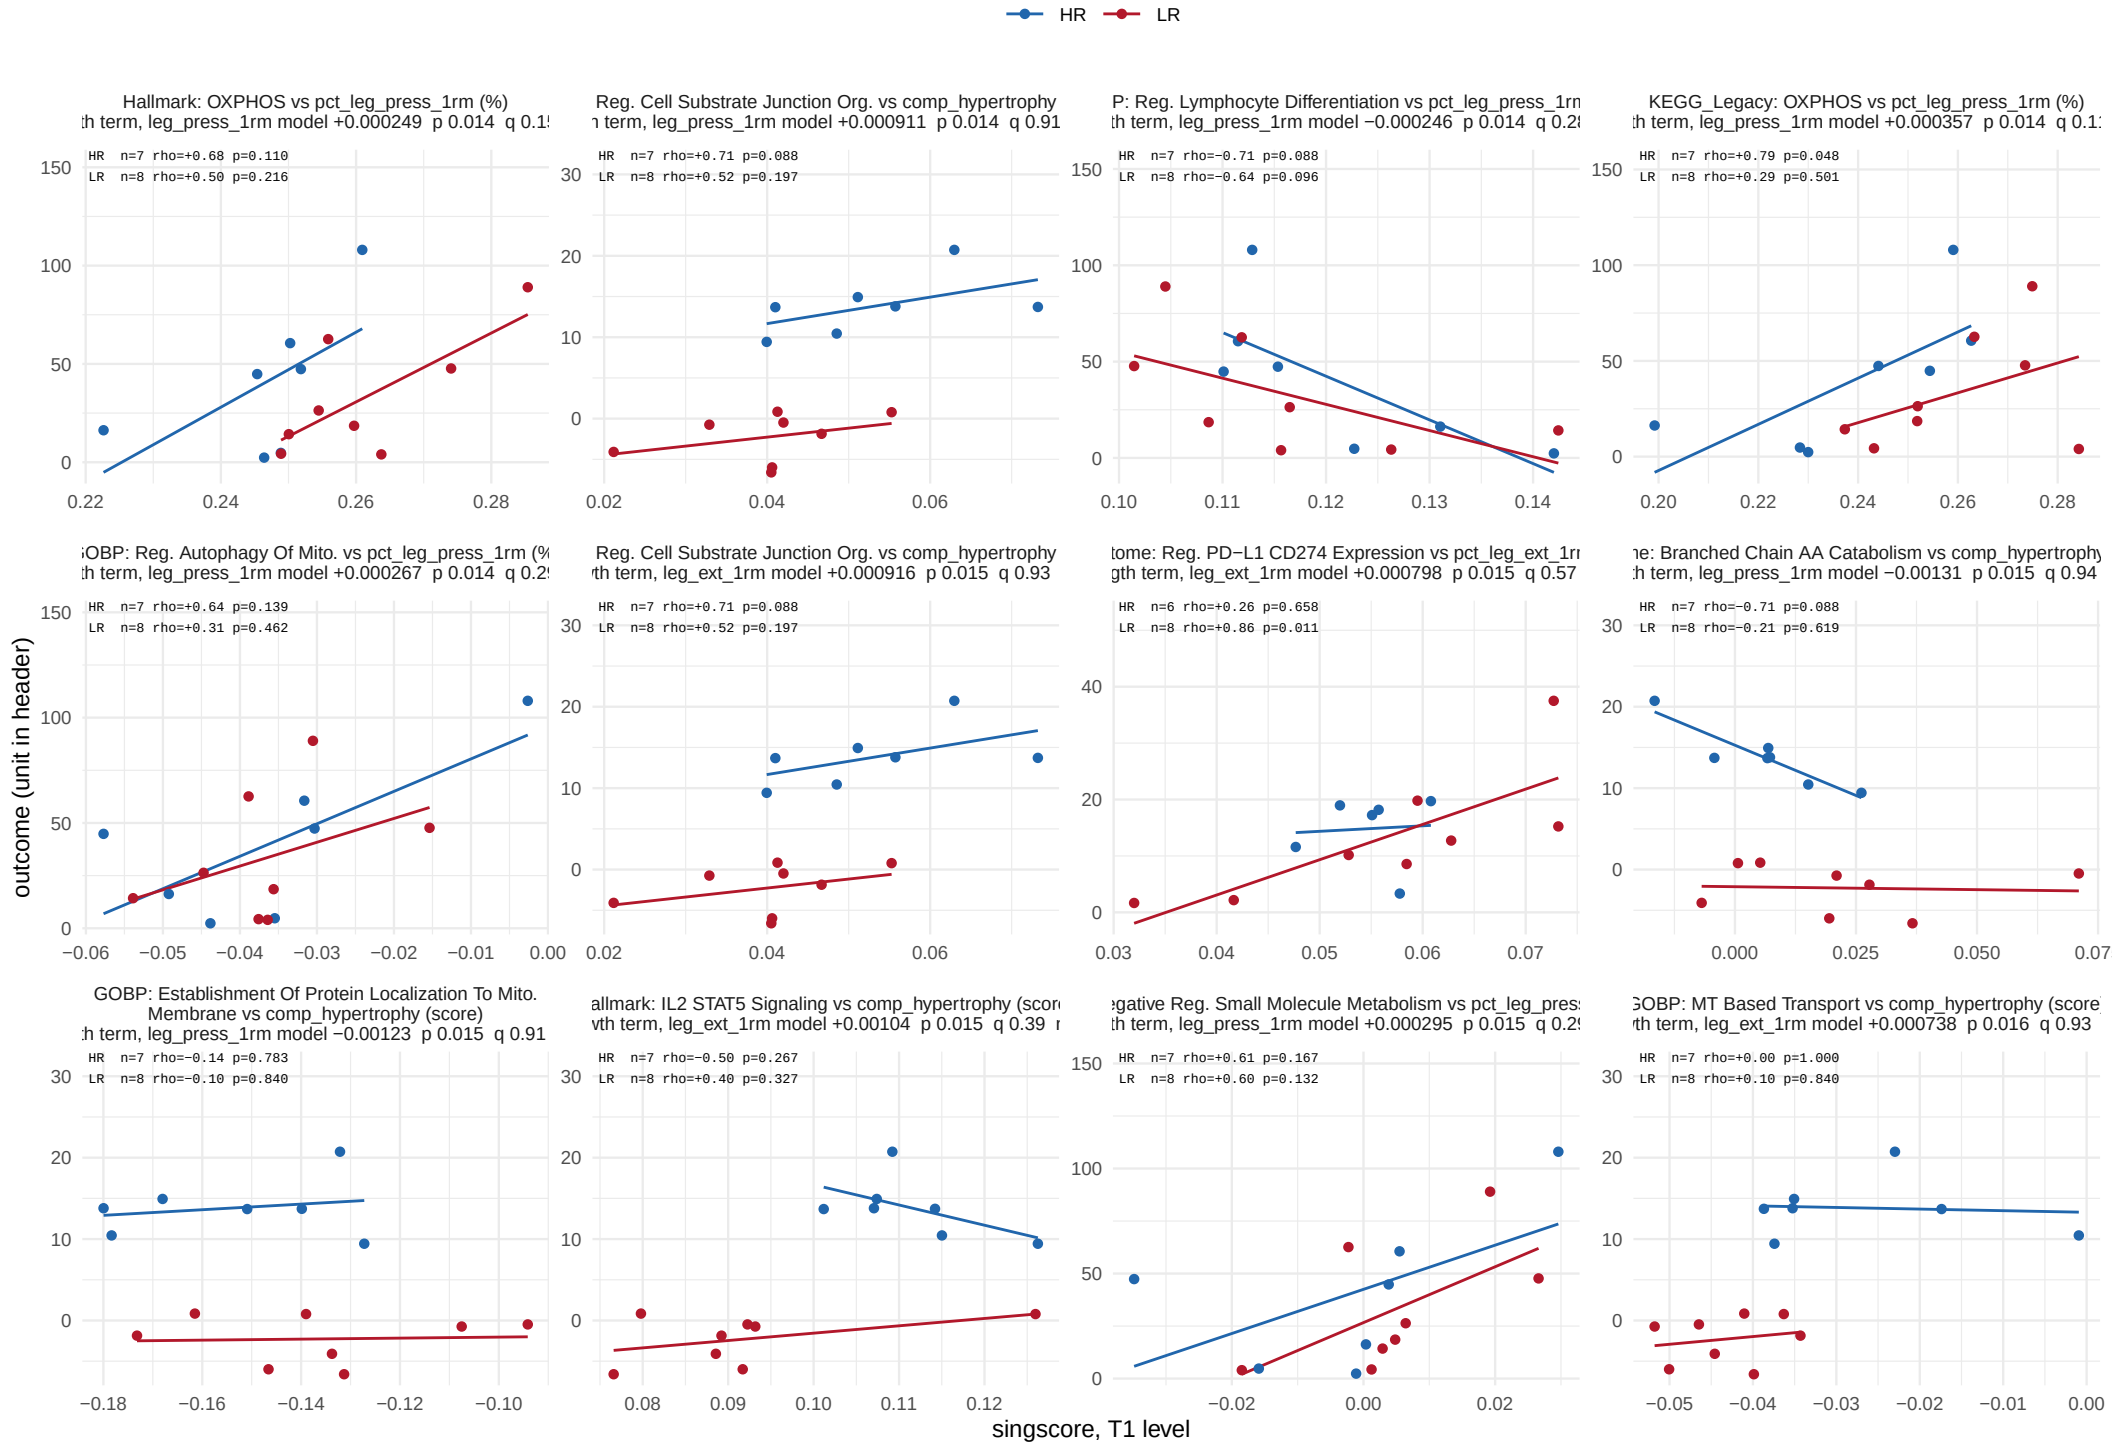

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, two_predictor.

Two predictor, baseline window


321 of 5512 feature−outcome pairs at p < 0.05, 6 at BH < 0.05. Page 9 of 27.

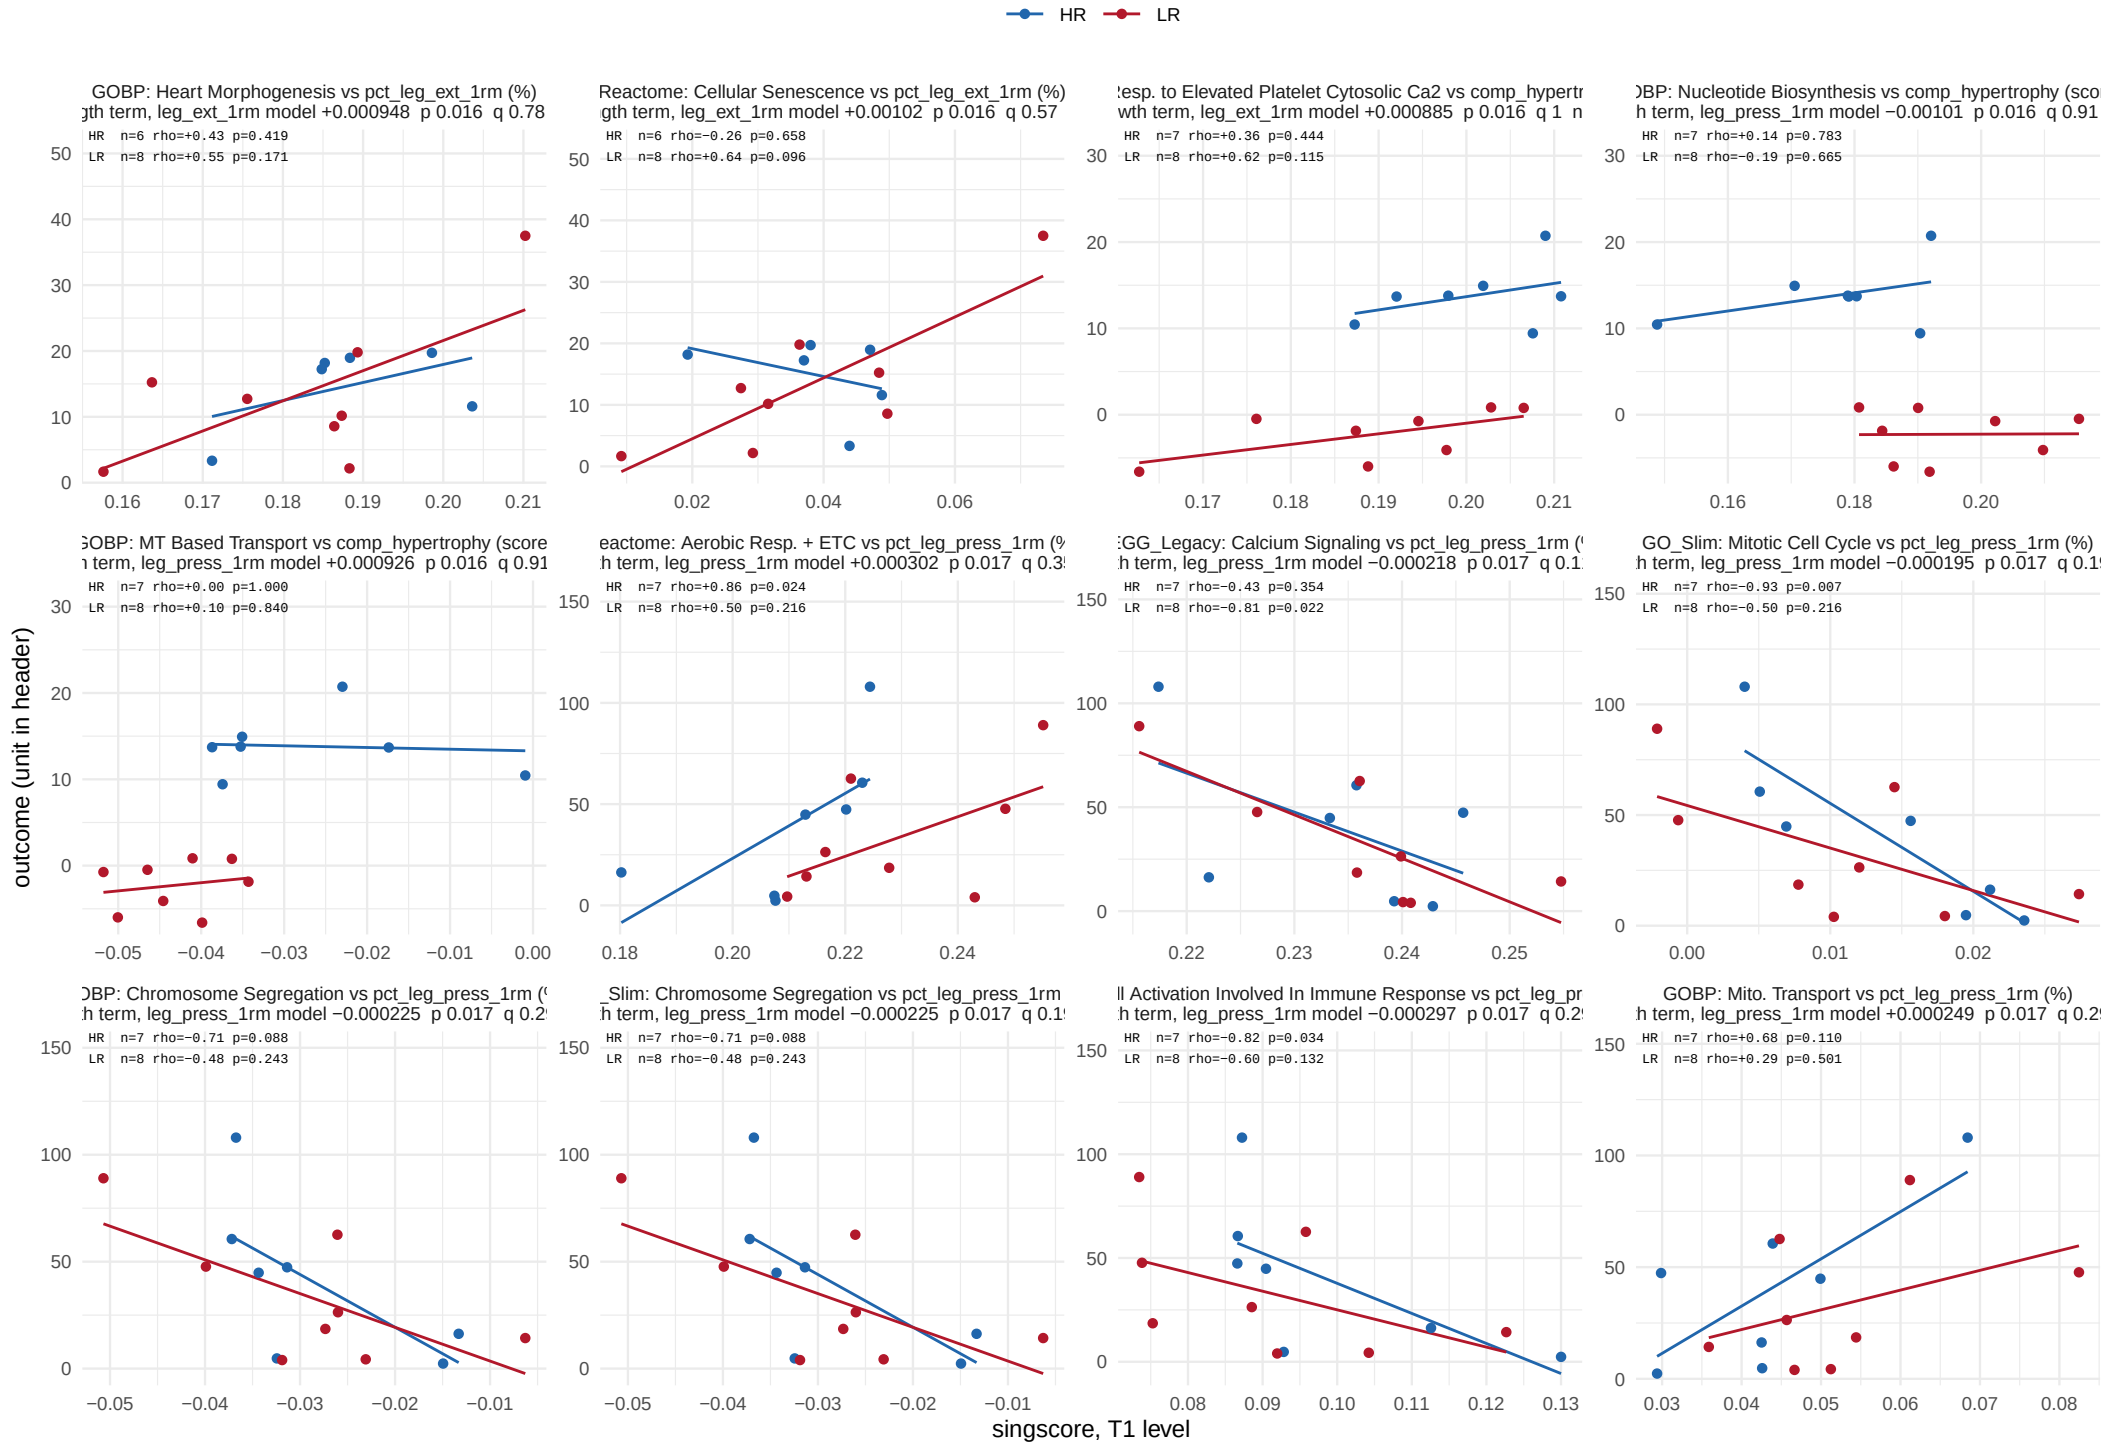

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, two_predictor.

Two predictor, baseline window


321 of 5512 feature−outcome pairs at p < 0.05, 6 at BH < 0.05. Page 10 of 27.

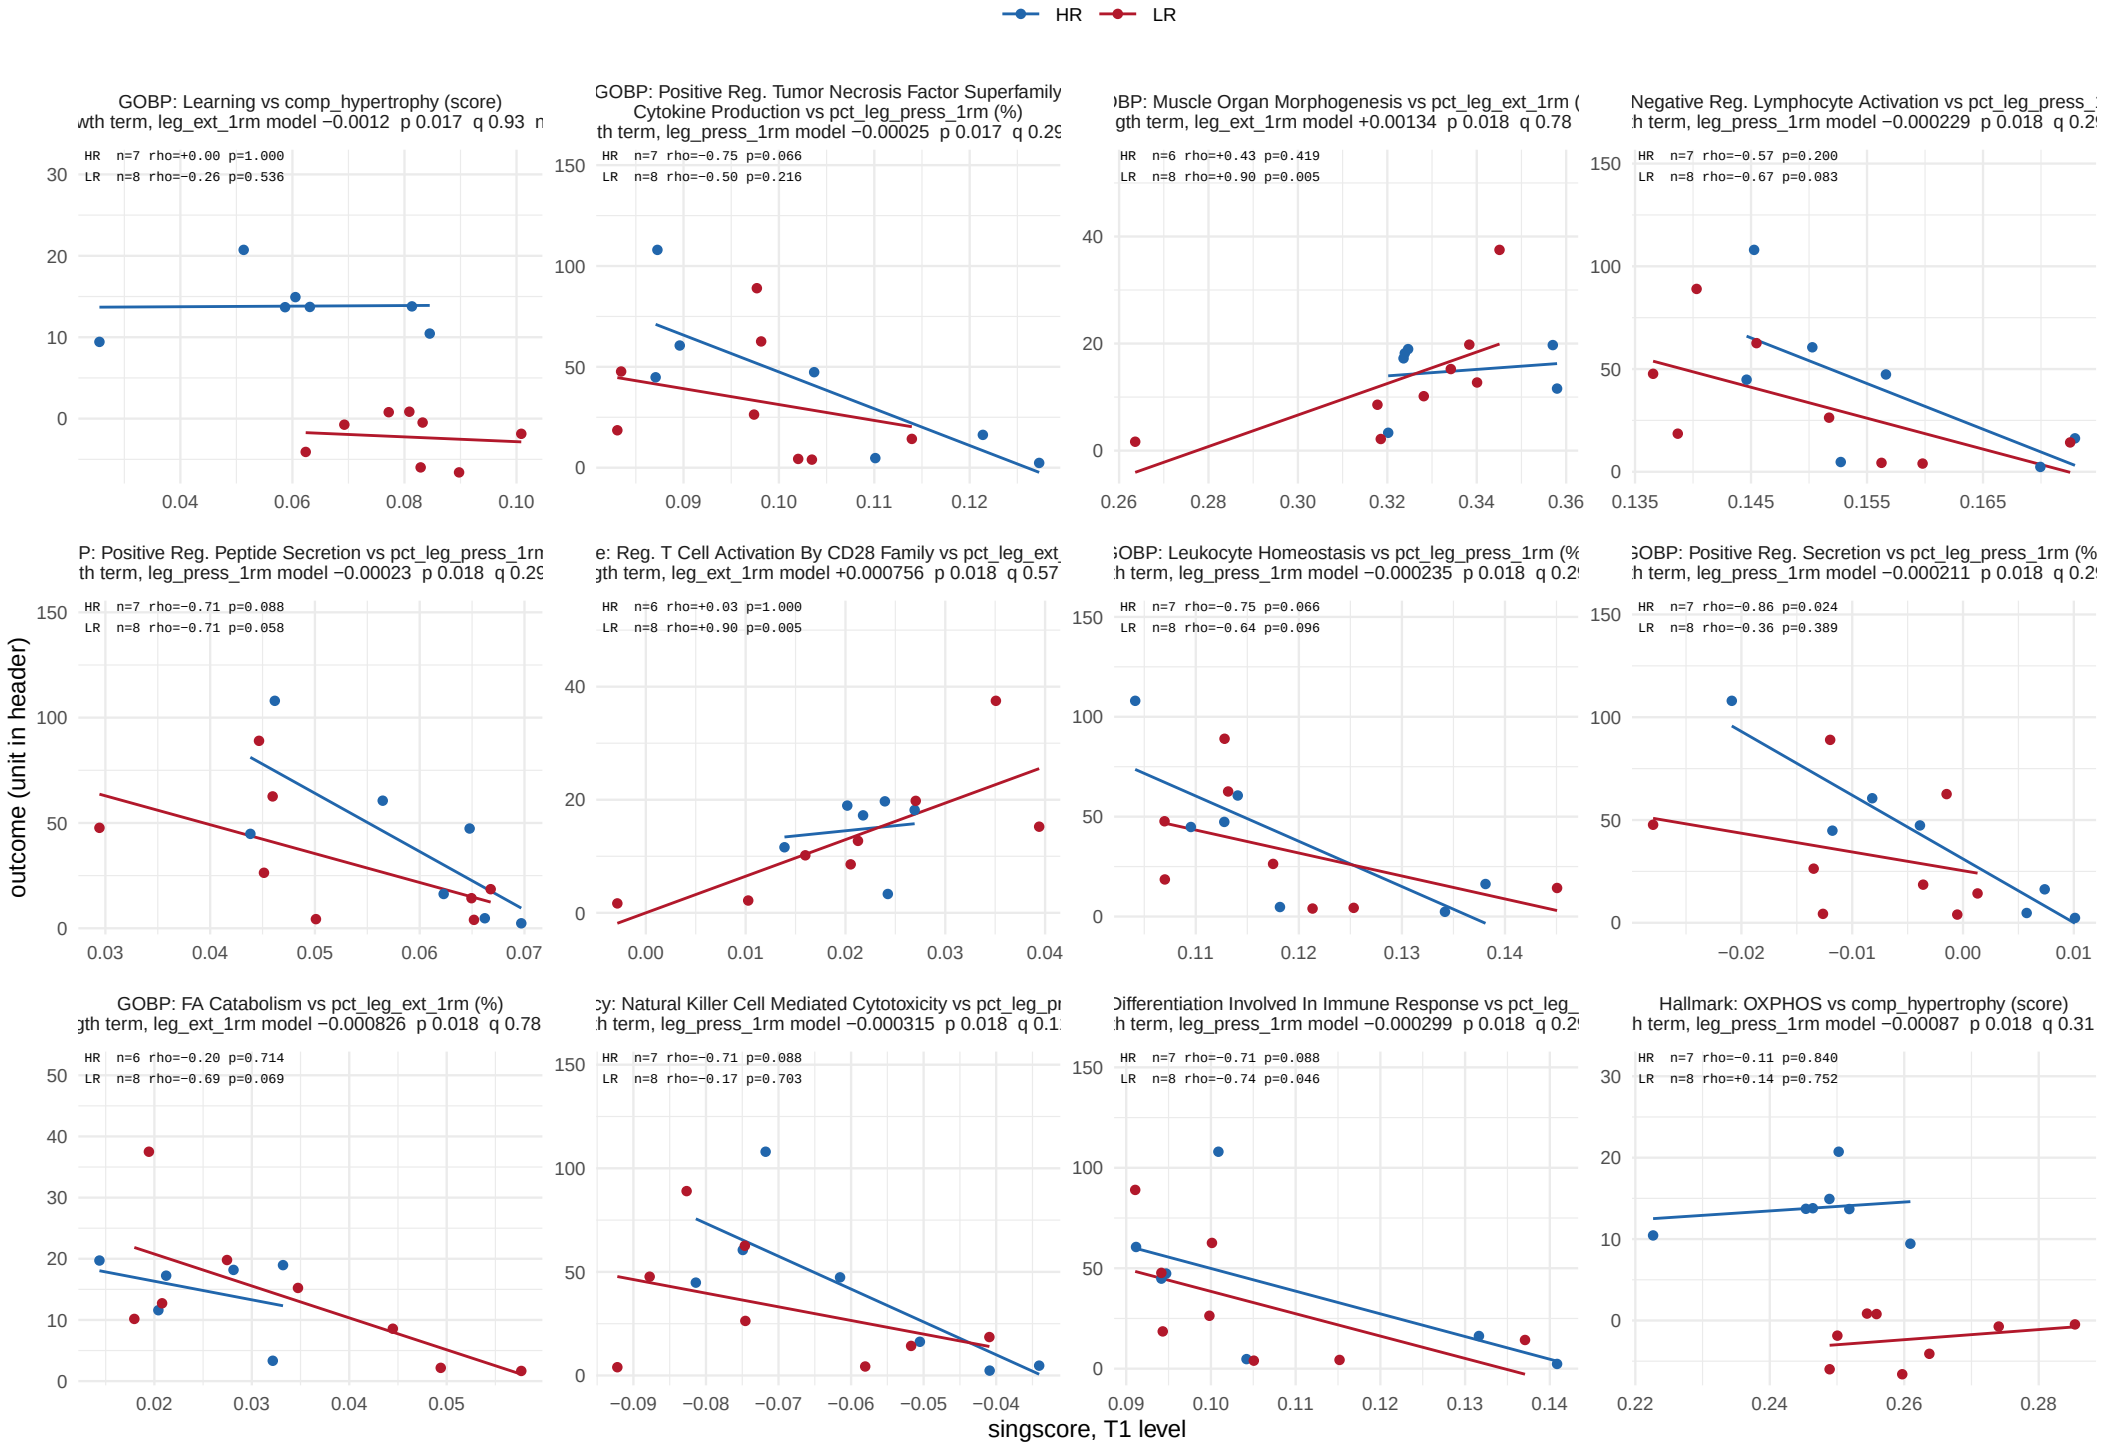

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, two_predictor.

Two predictor, baseline window


321 of 5512 feature−outcome pairs at p < 0.05, 6 at BH < 0.05. Page 11 of 27.

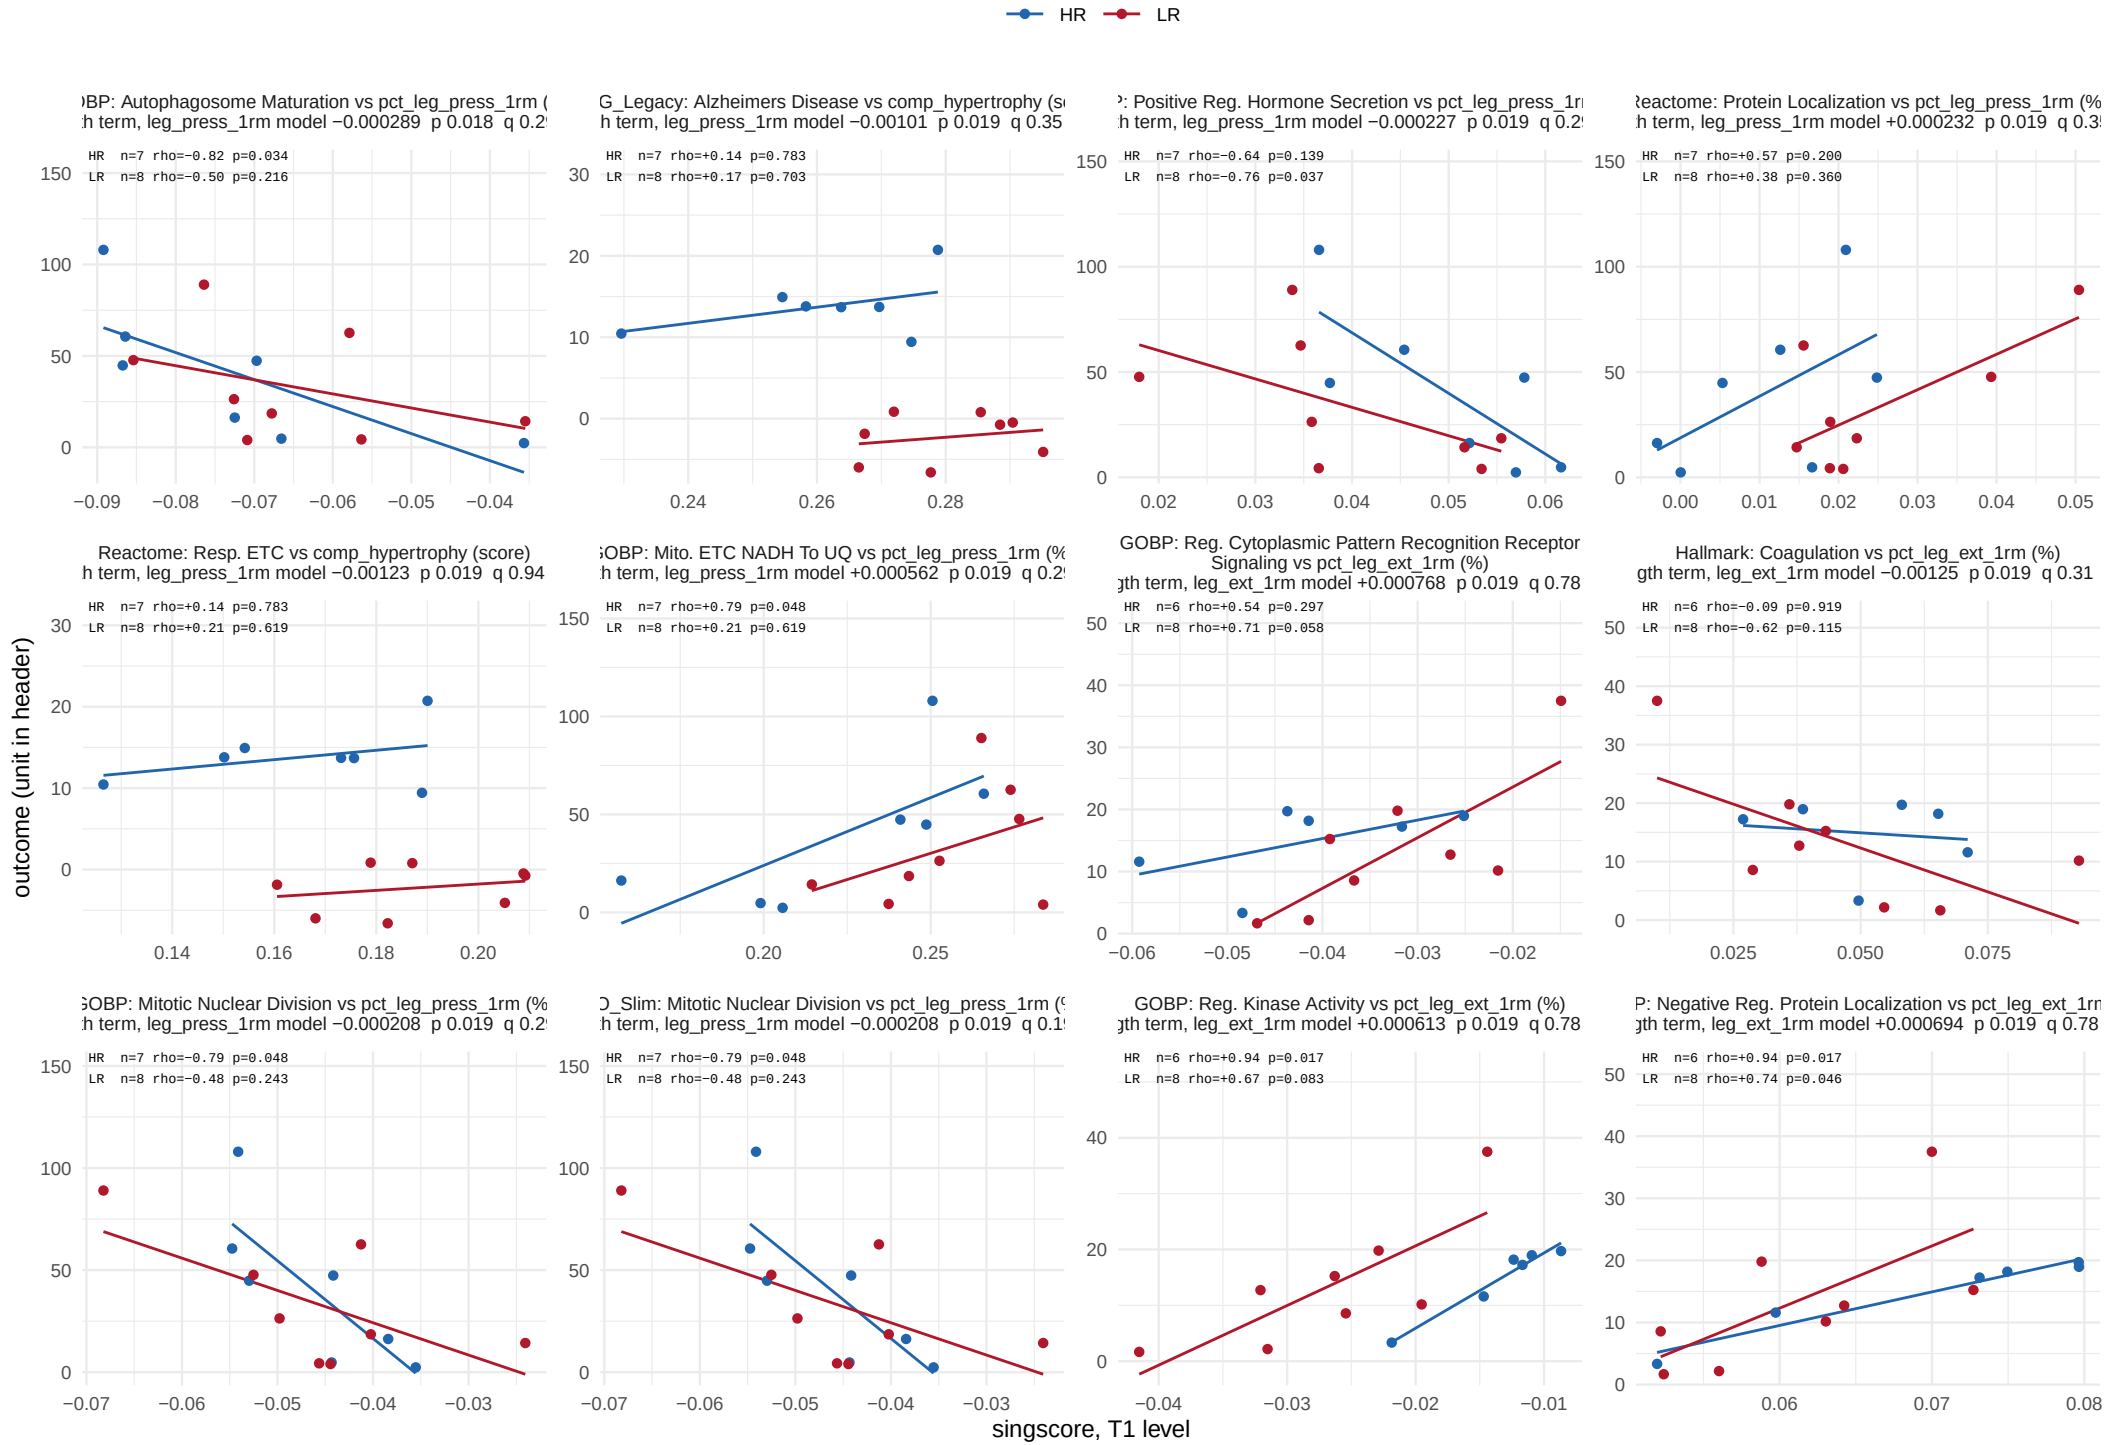

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, two_predictor.

Two predictor, baseline window


321 of 5512 feature−outcome pairs at p < 0.05, 6 at BH < 0.05. Page 12 of 27.

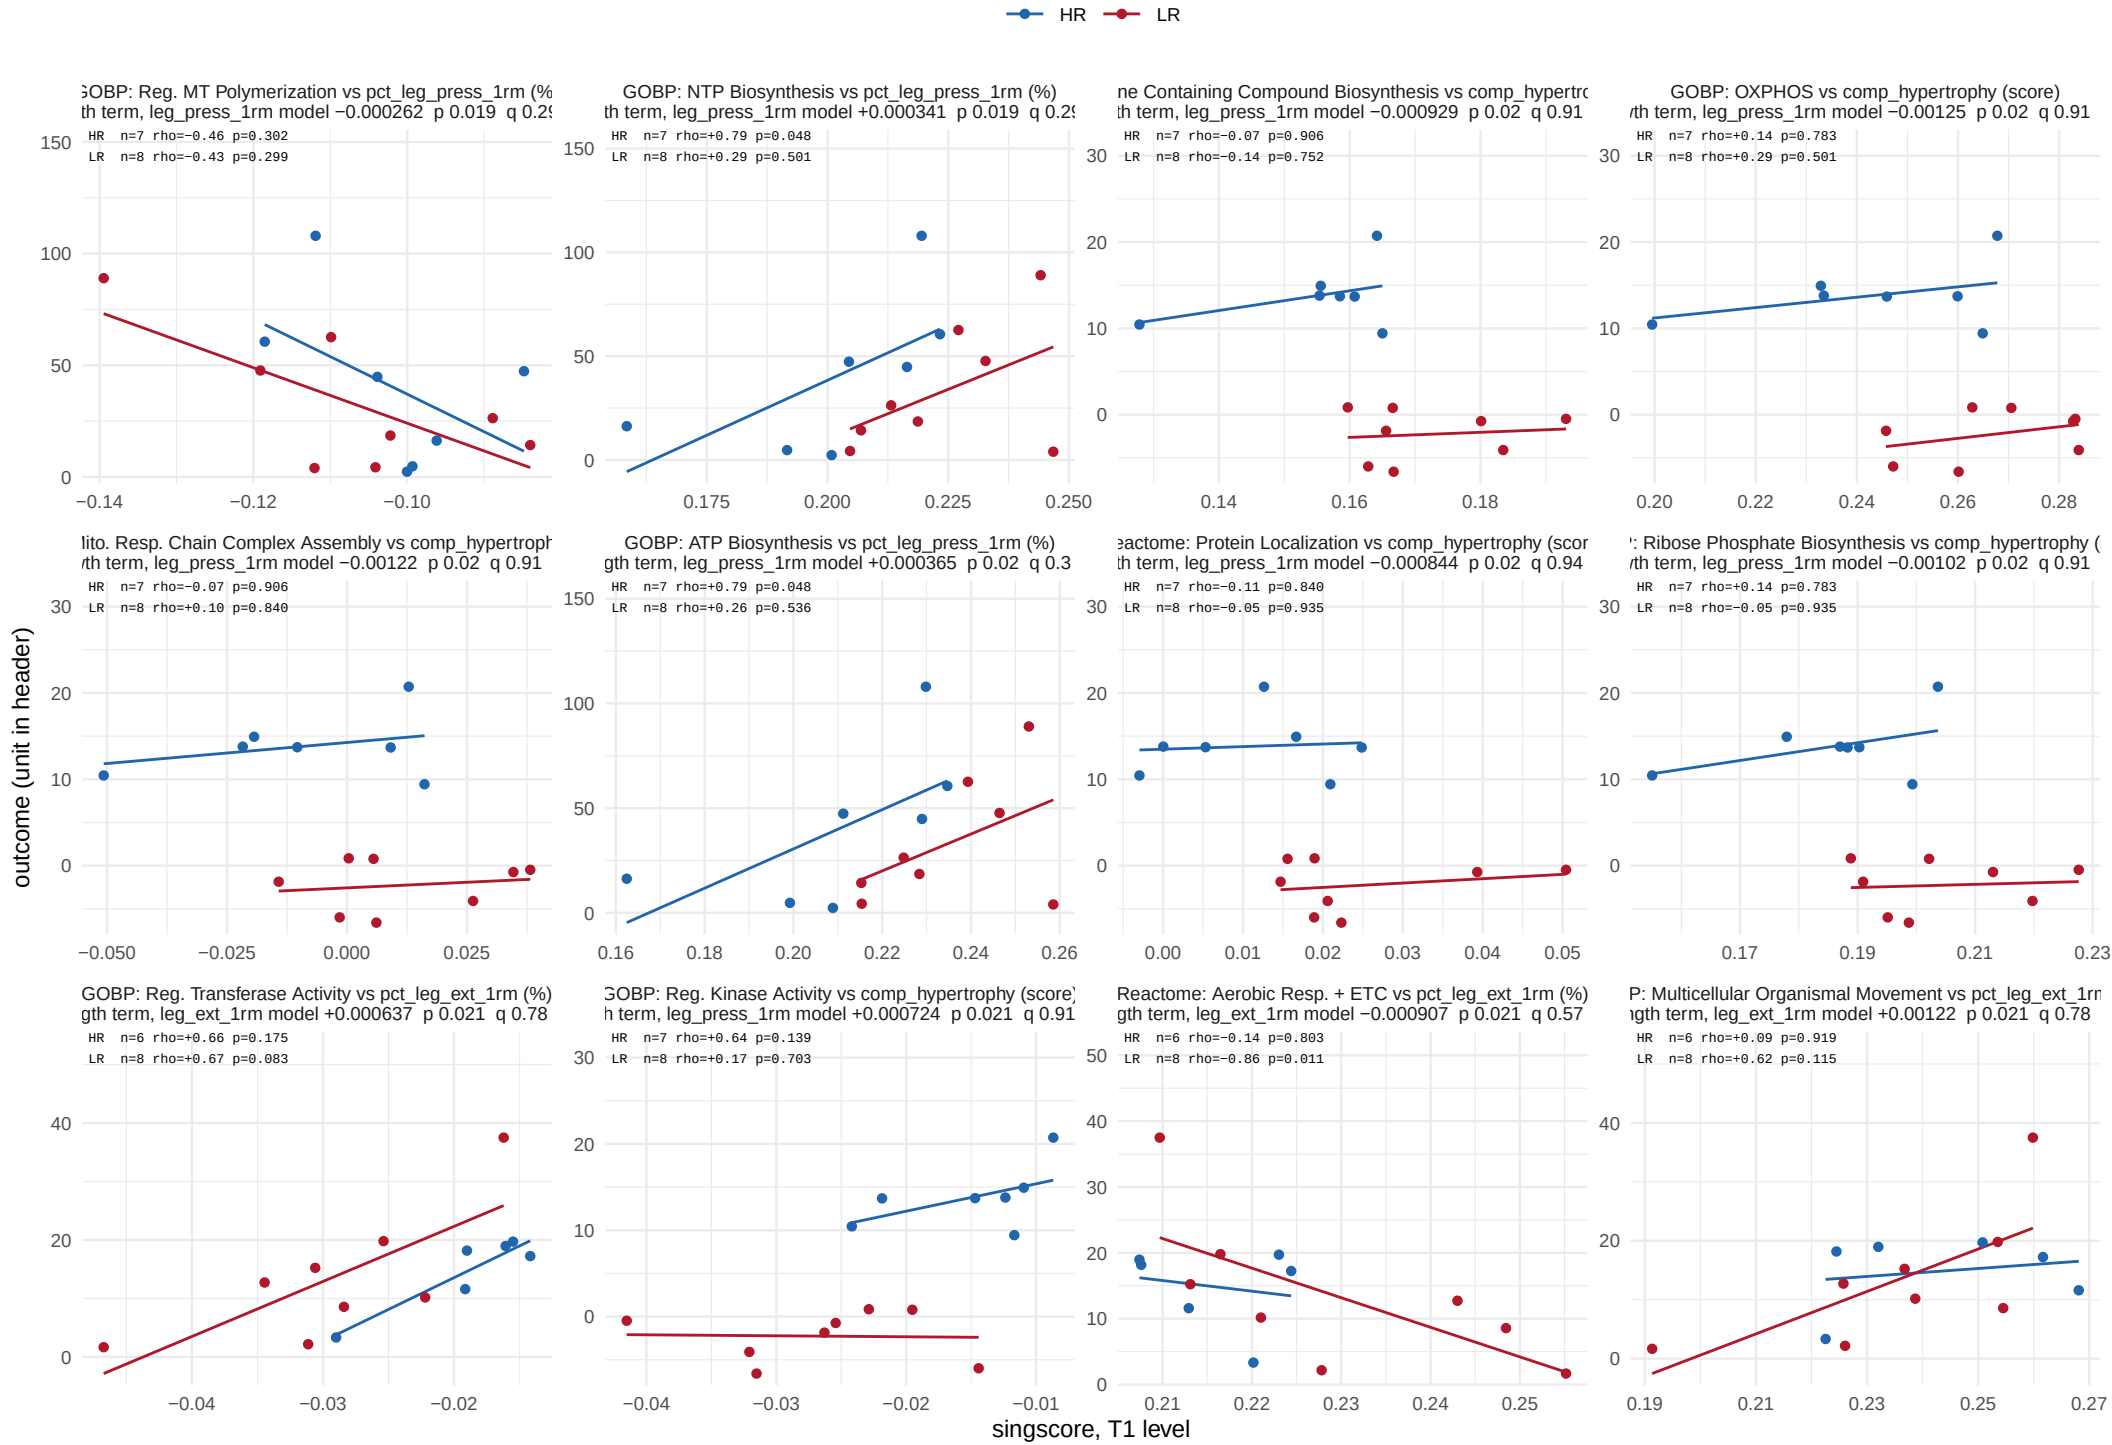

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, two_predictor.

Two predictor, baseline window


321 of 5512 feature−outcome pairs at p < 0.05, 6 at BH < 0.05. Page 13 of 27.

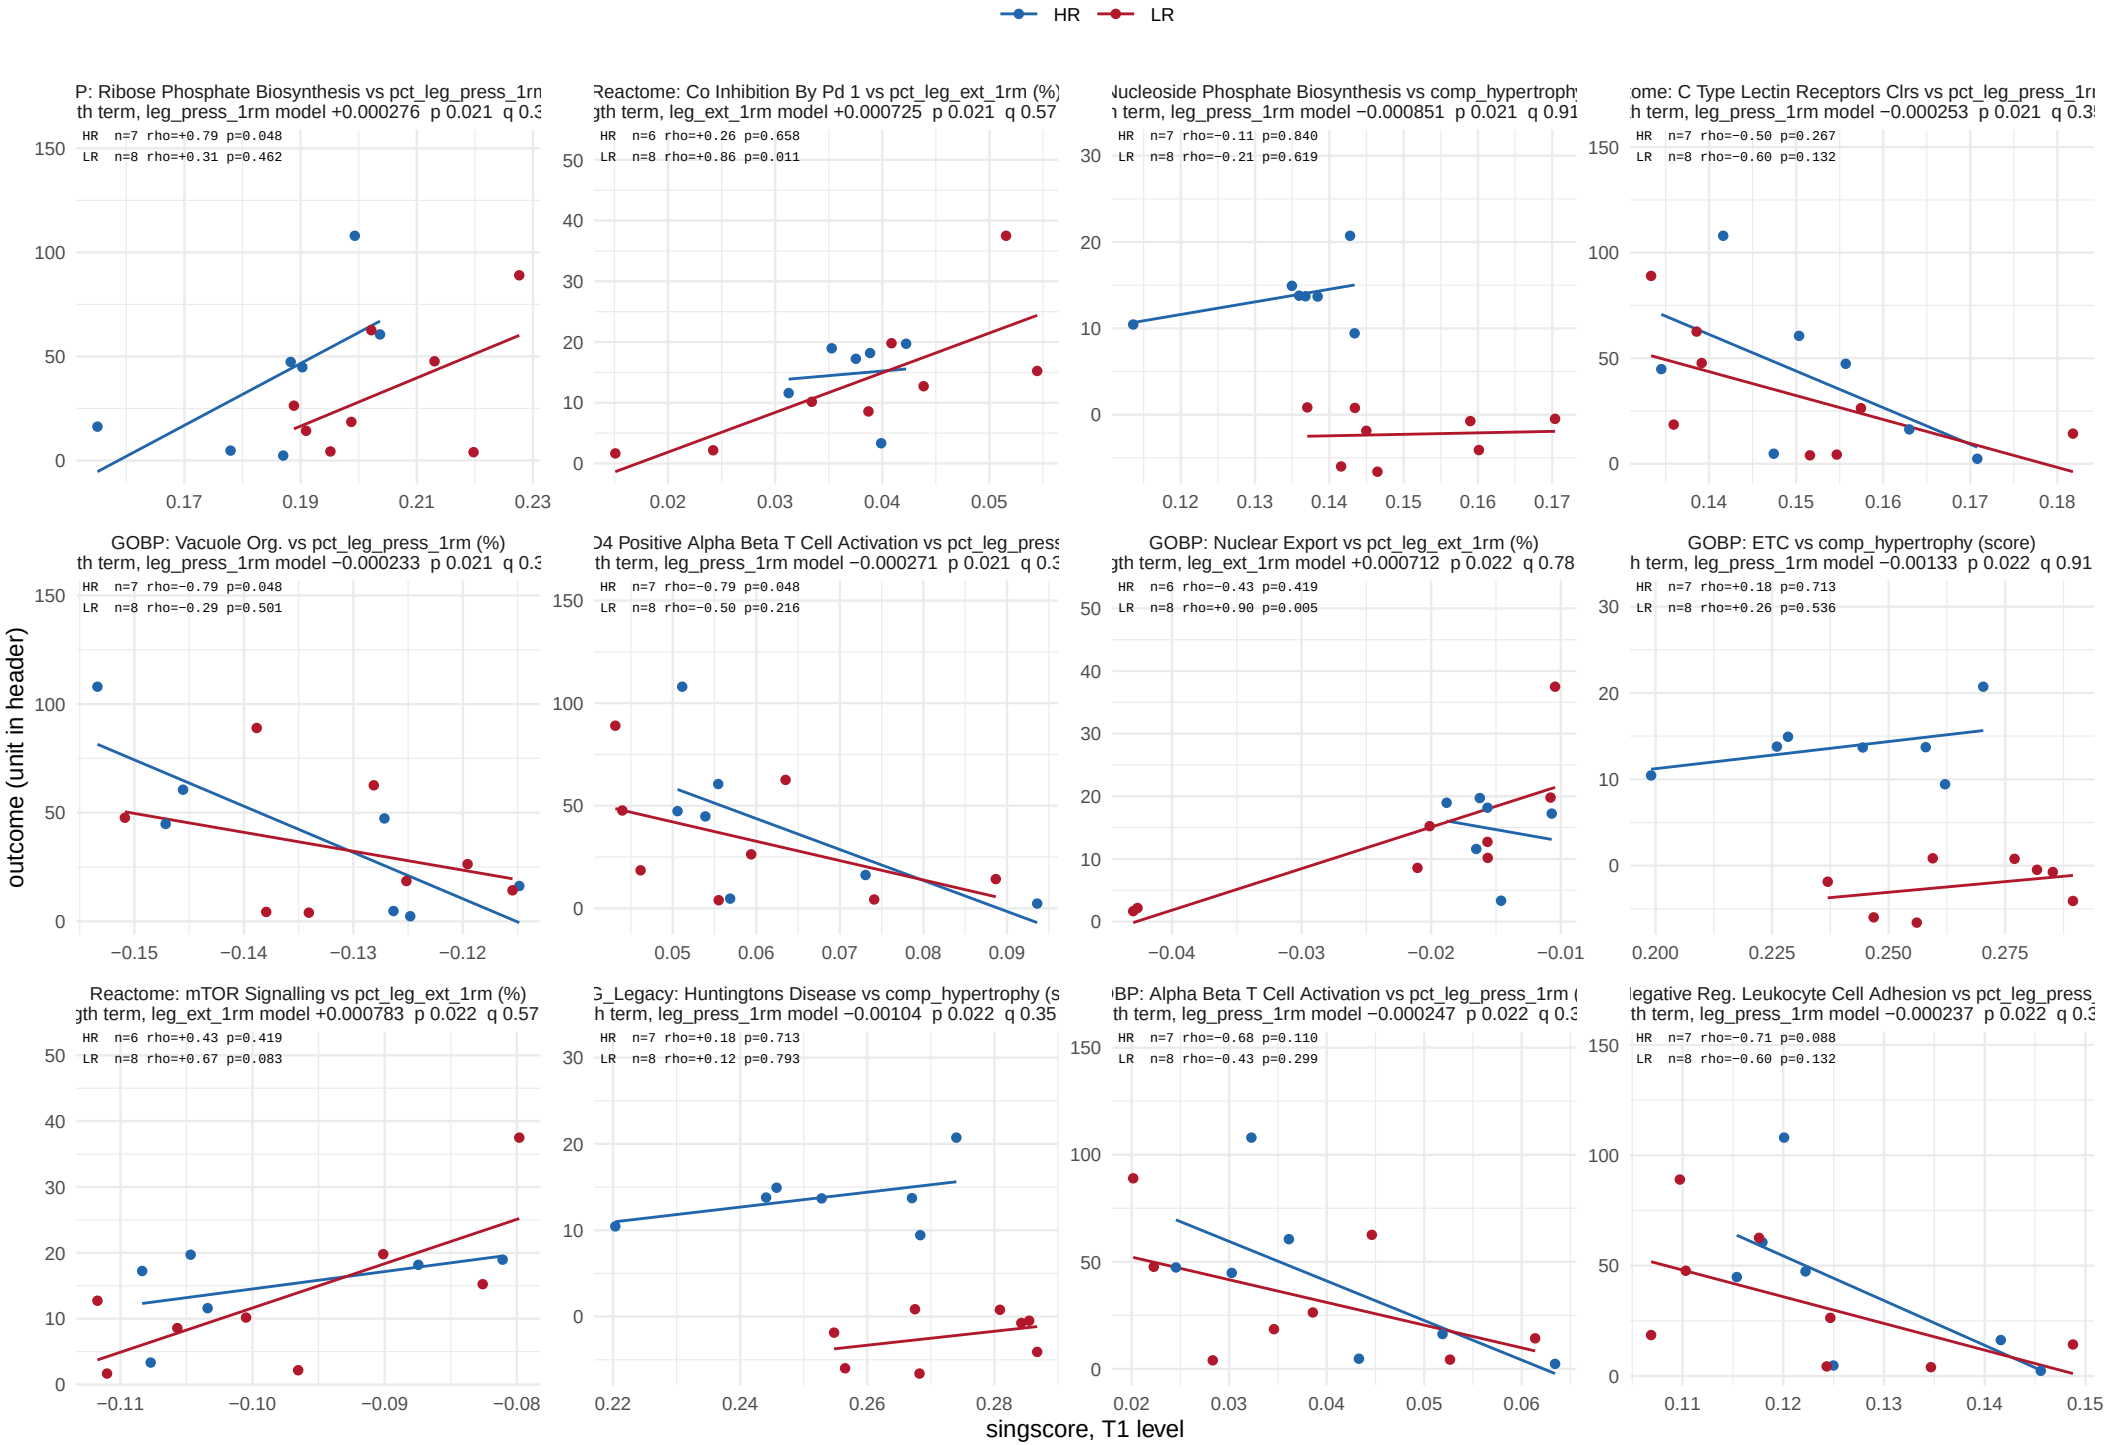

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, two_predictor.

Two predictor, baseline window


321 of 5512 feature−outcome pairs at p < 0.05, 6 at BH < 0.05. Page 14 of 27.

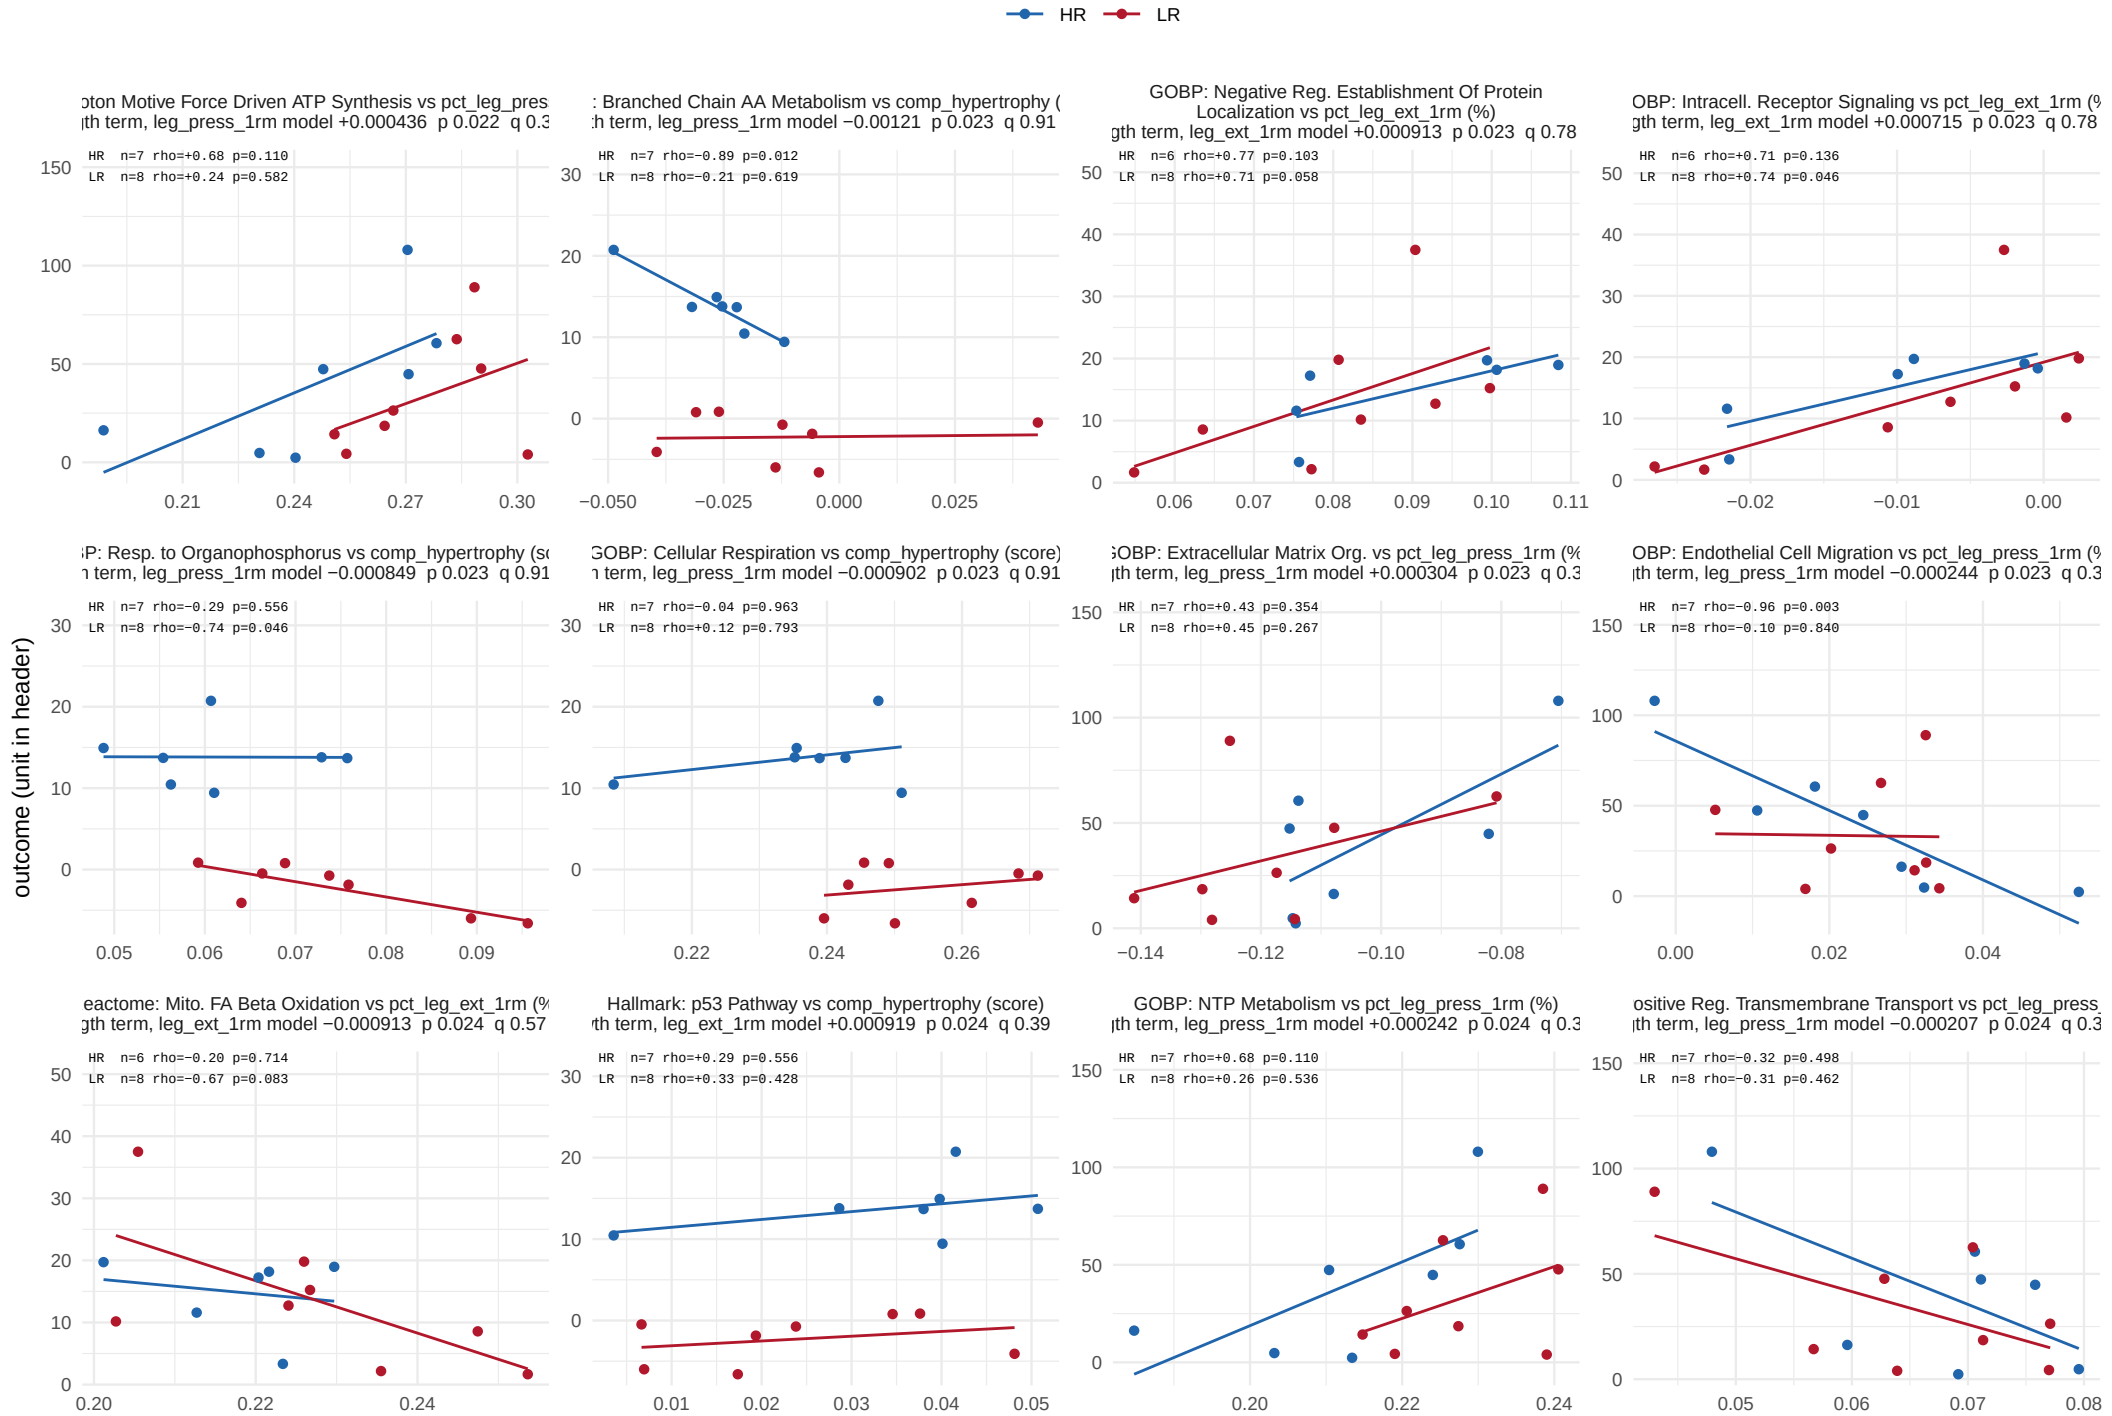

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, two_predictor.

Two predictor, baseline window


321 of 5512 feature−outcome pairs at p < 0.05, 6 at BH < 0.05. Page 15 of 27.

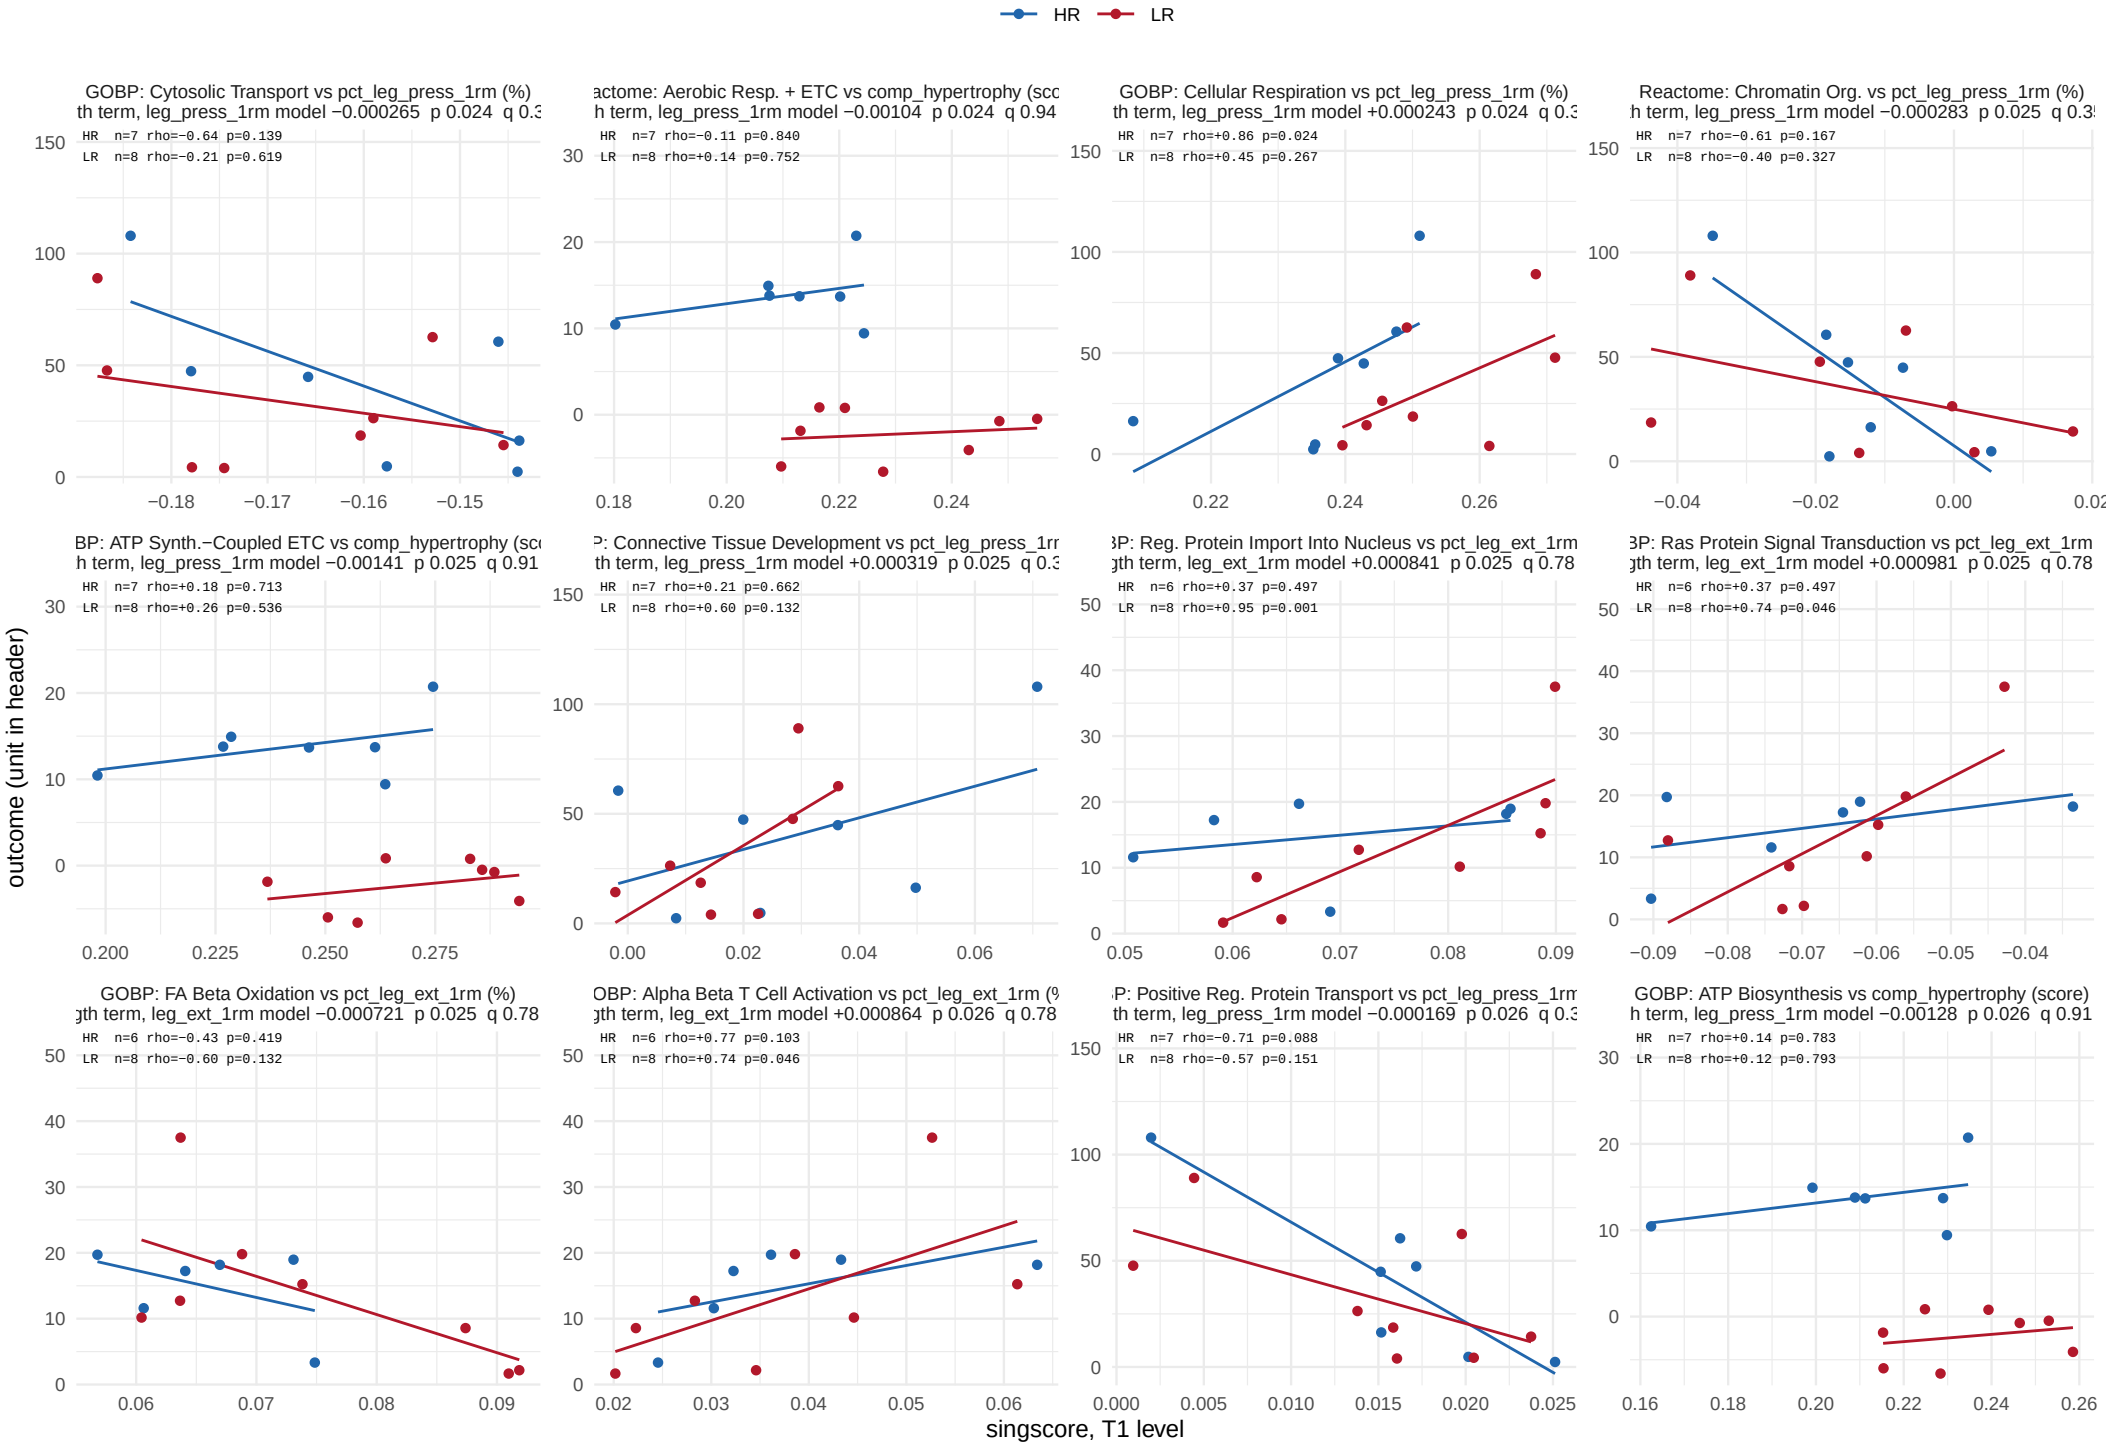

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, two_predictor.

Two predictor, baseline window


321 of 5512 feature−outcome pairs at p < 0.05, 6 at BH < 0.05. Page 16 of 27.

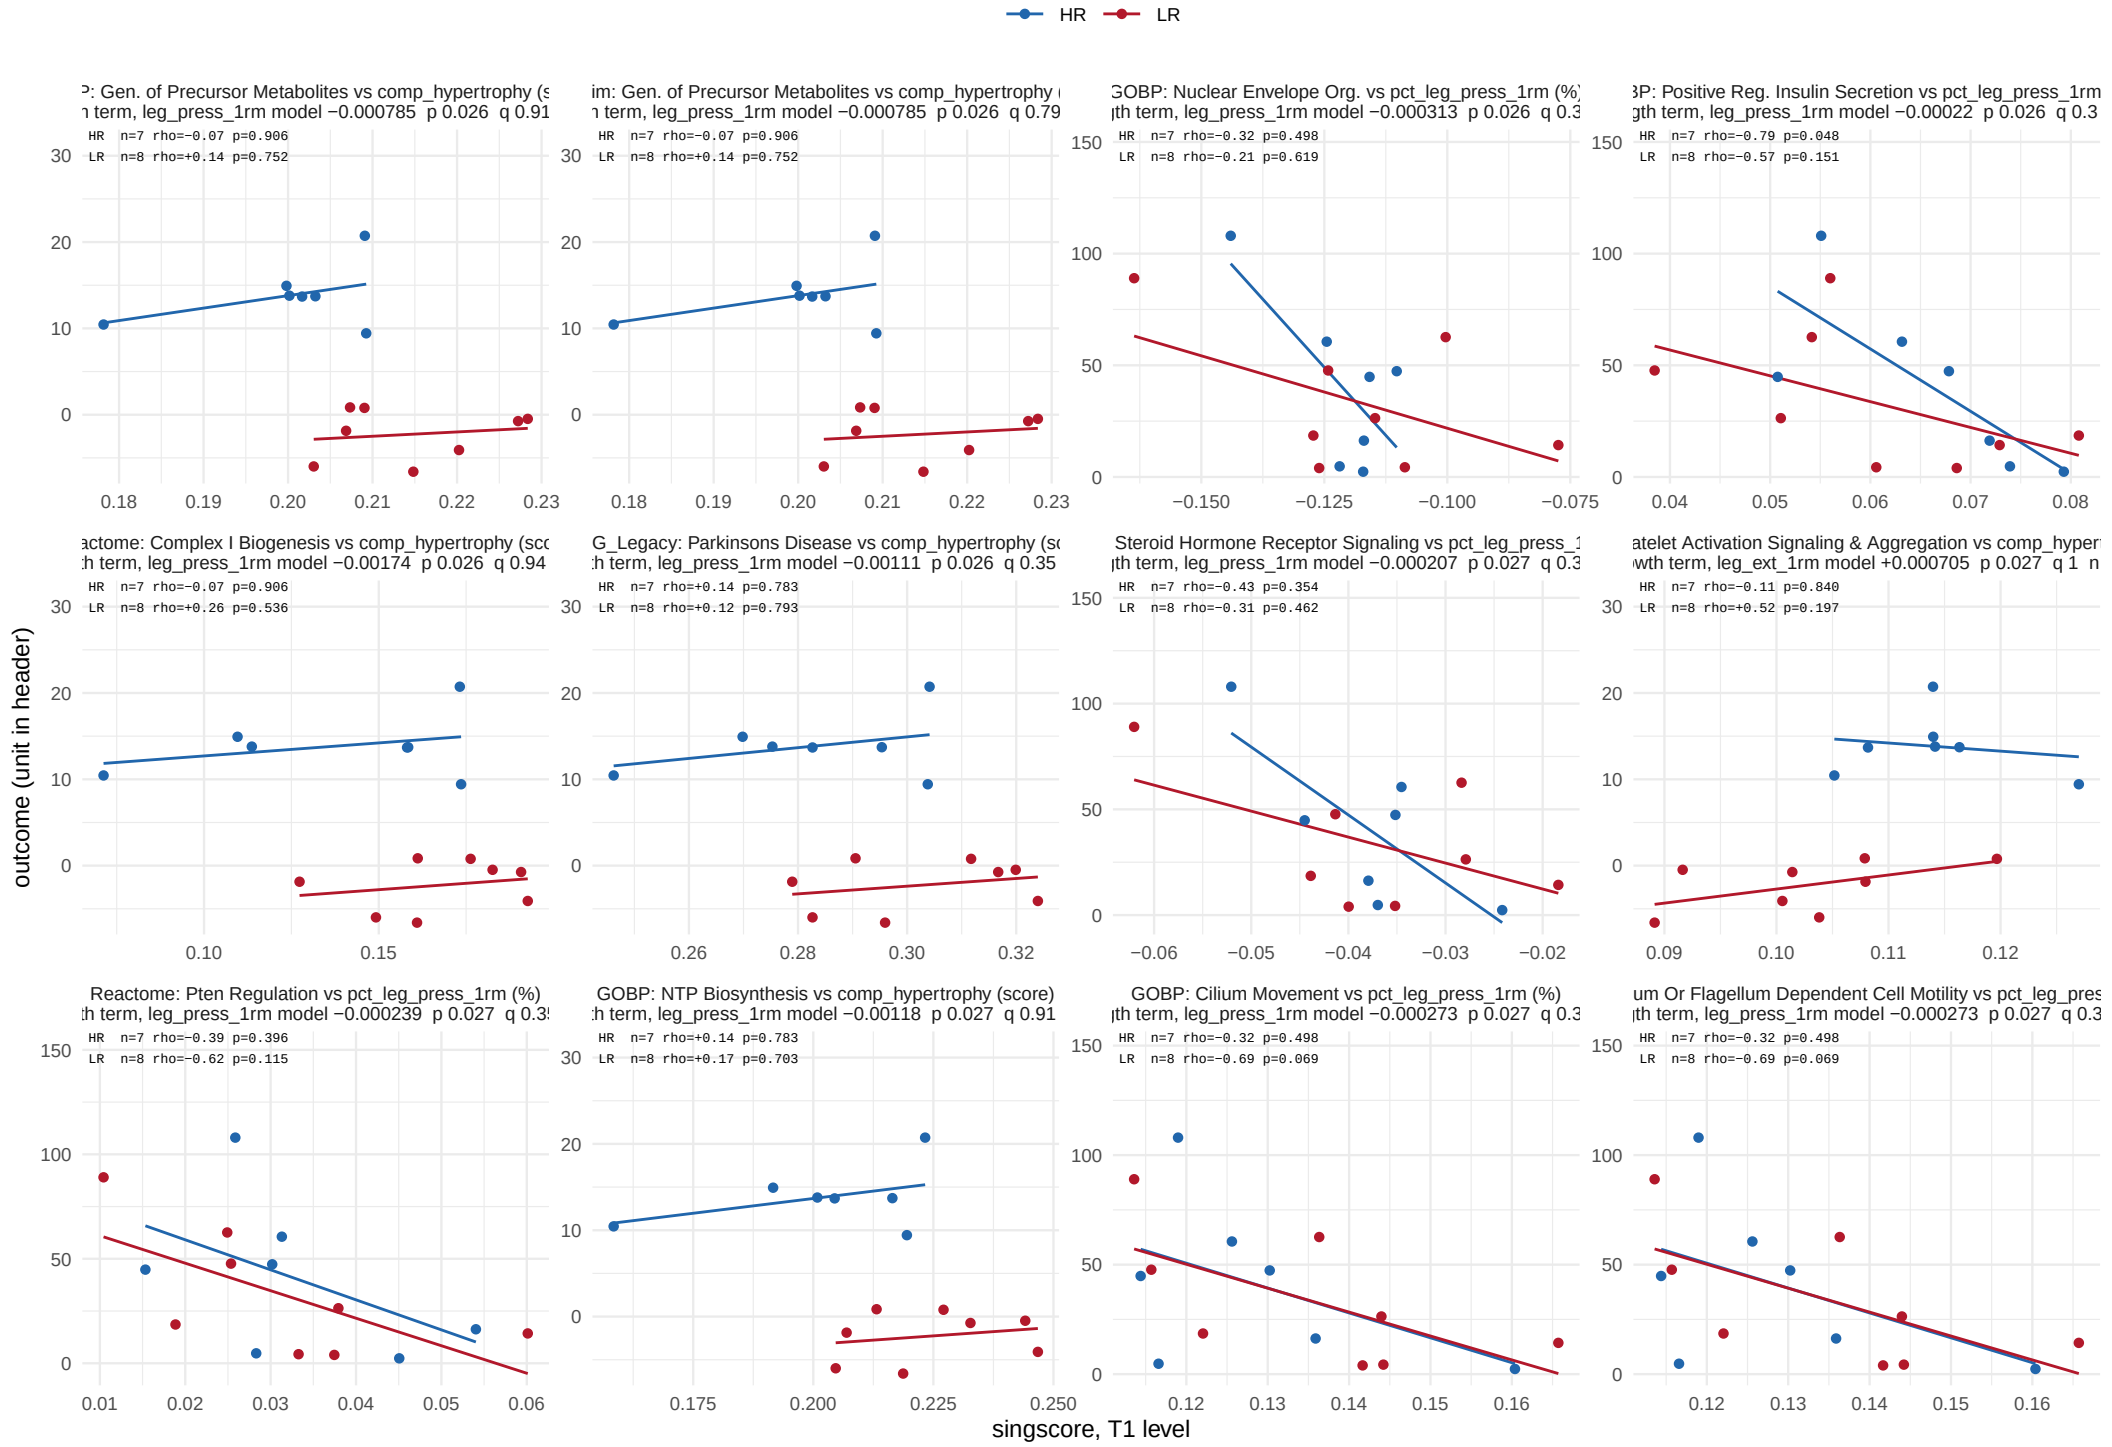

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, two_predictor.

Two predictor, baseline window


321 of 5512 feature−outcome pairs at p < 0.05, 6 at BH < 0.05. Page 17 of 27.

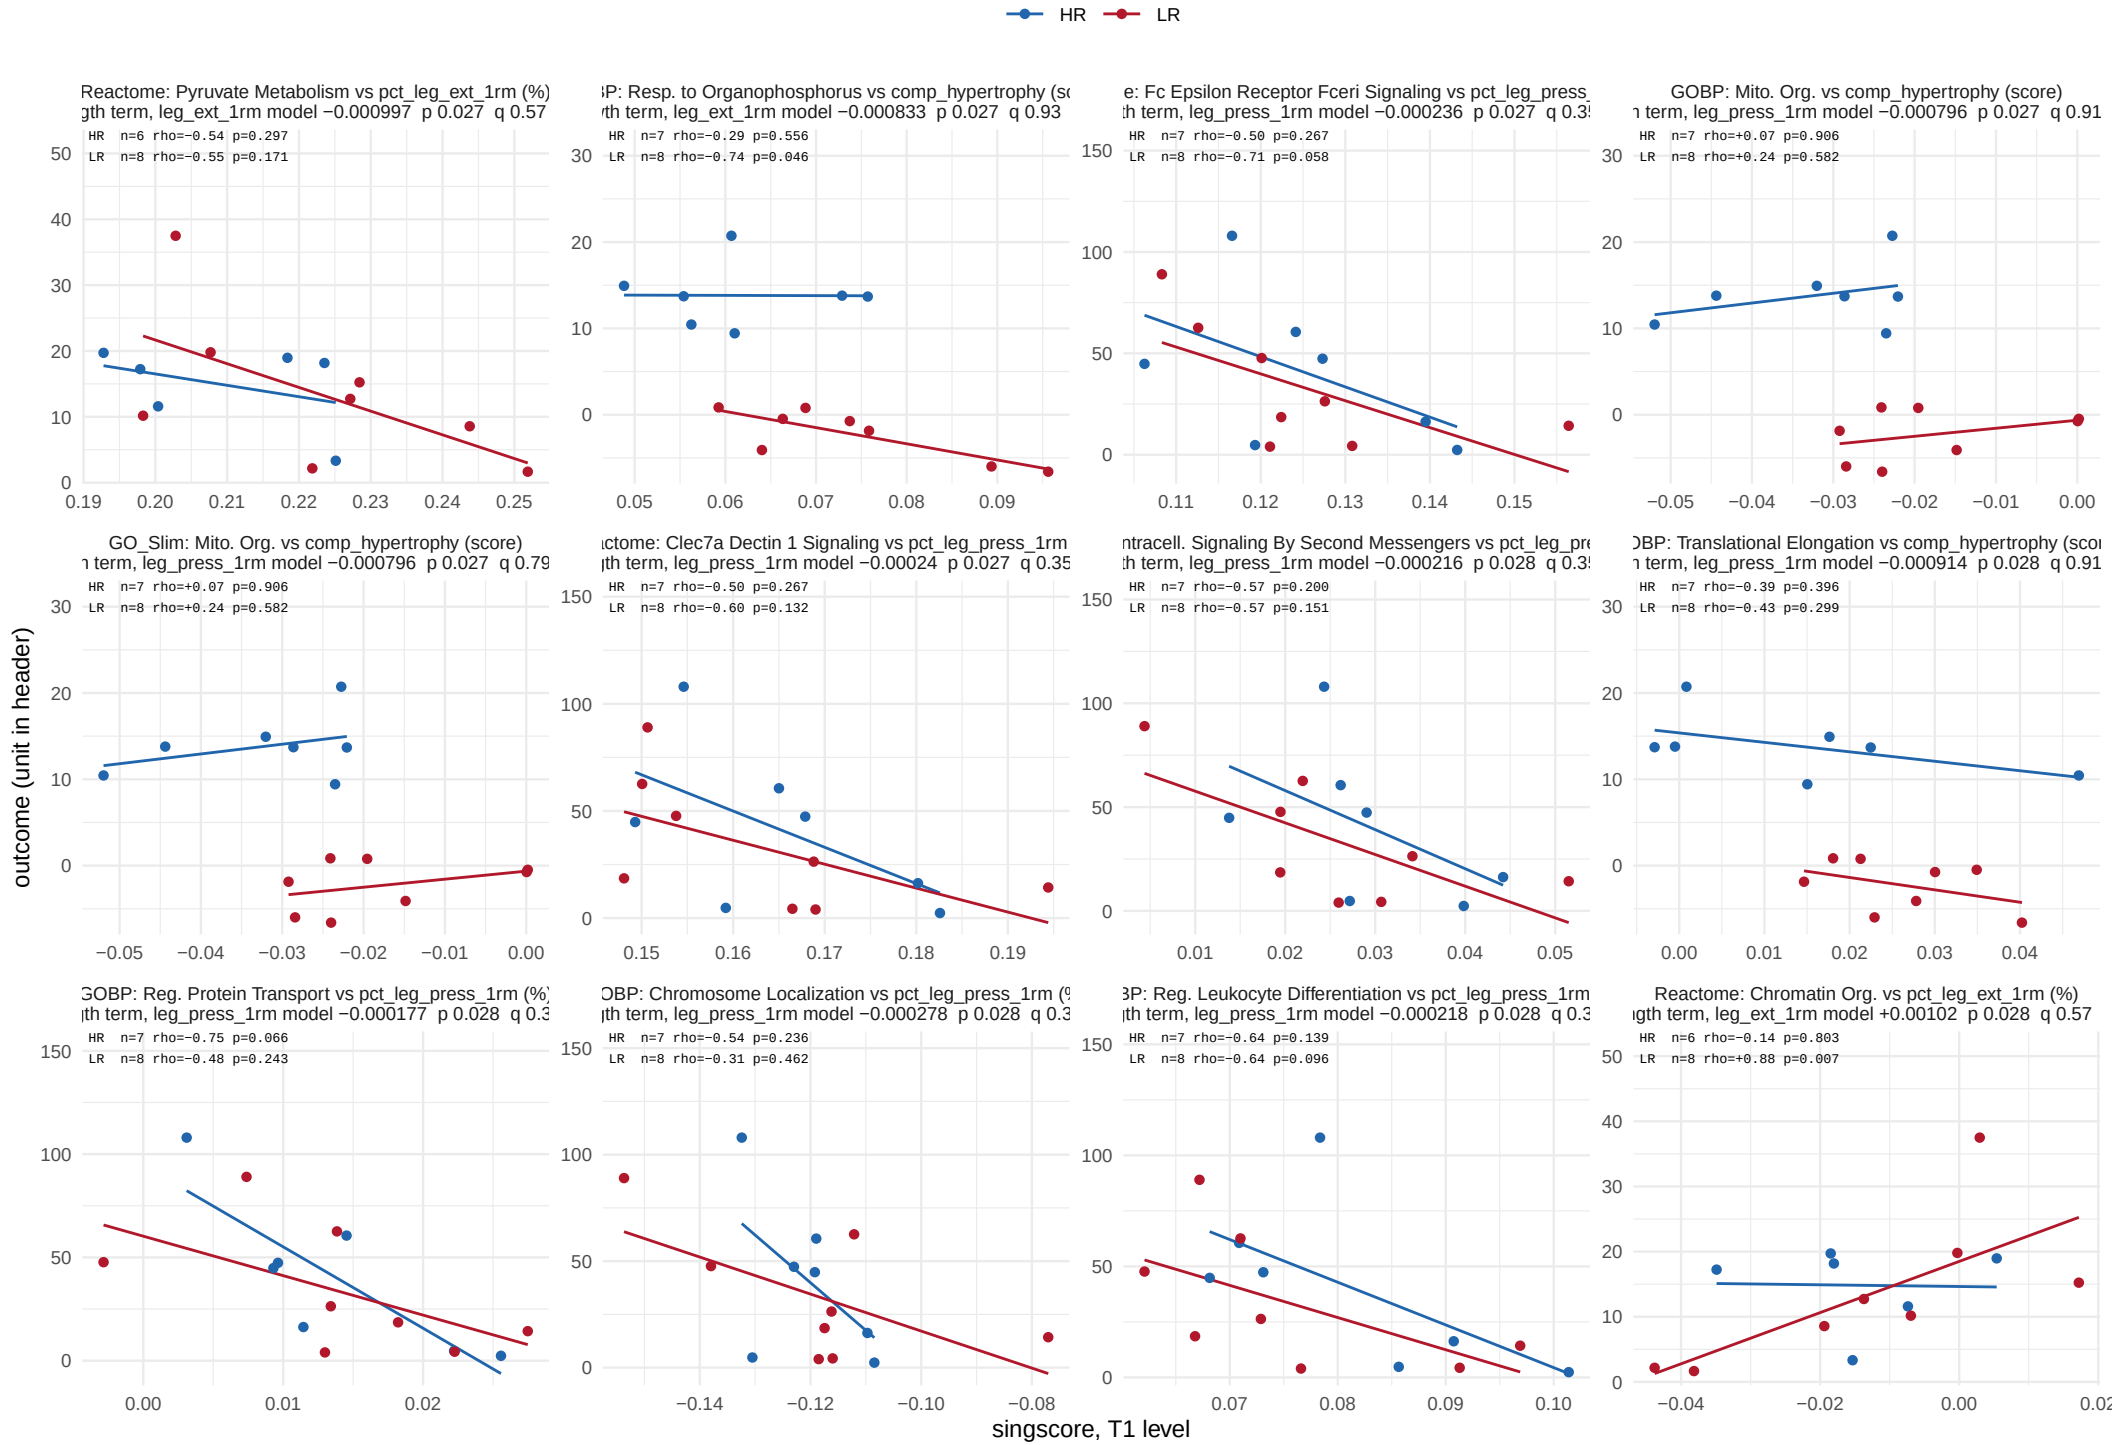

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, two_predictor.

Two predictor, baseline window


321 of 5512 feature−outcome pairs at p < 0.05, 6 at BH < 0.05. Page 18 of 27.

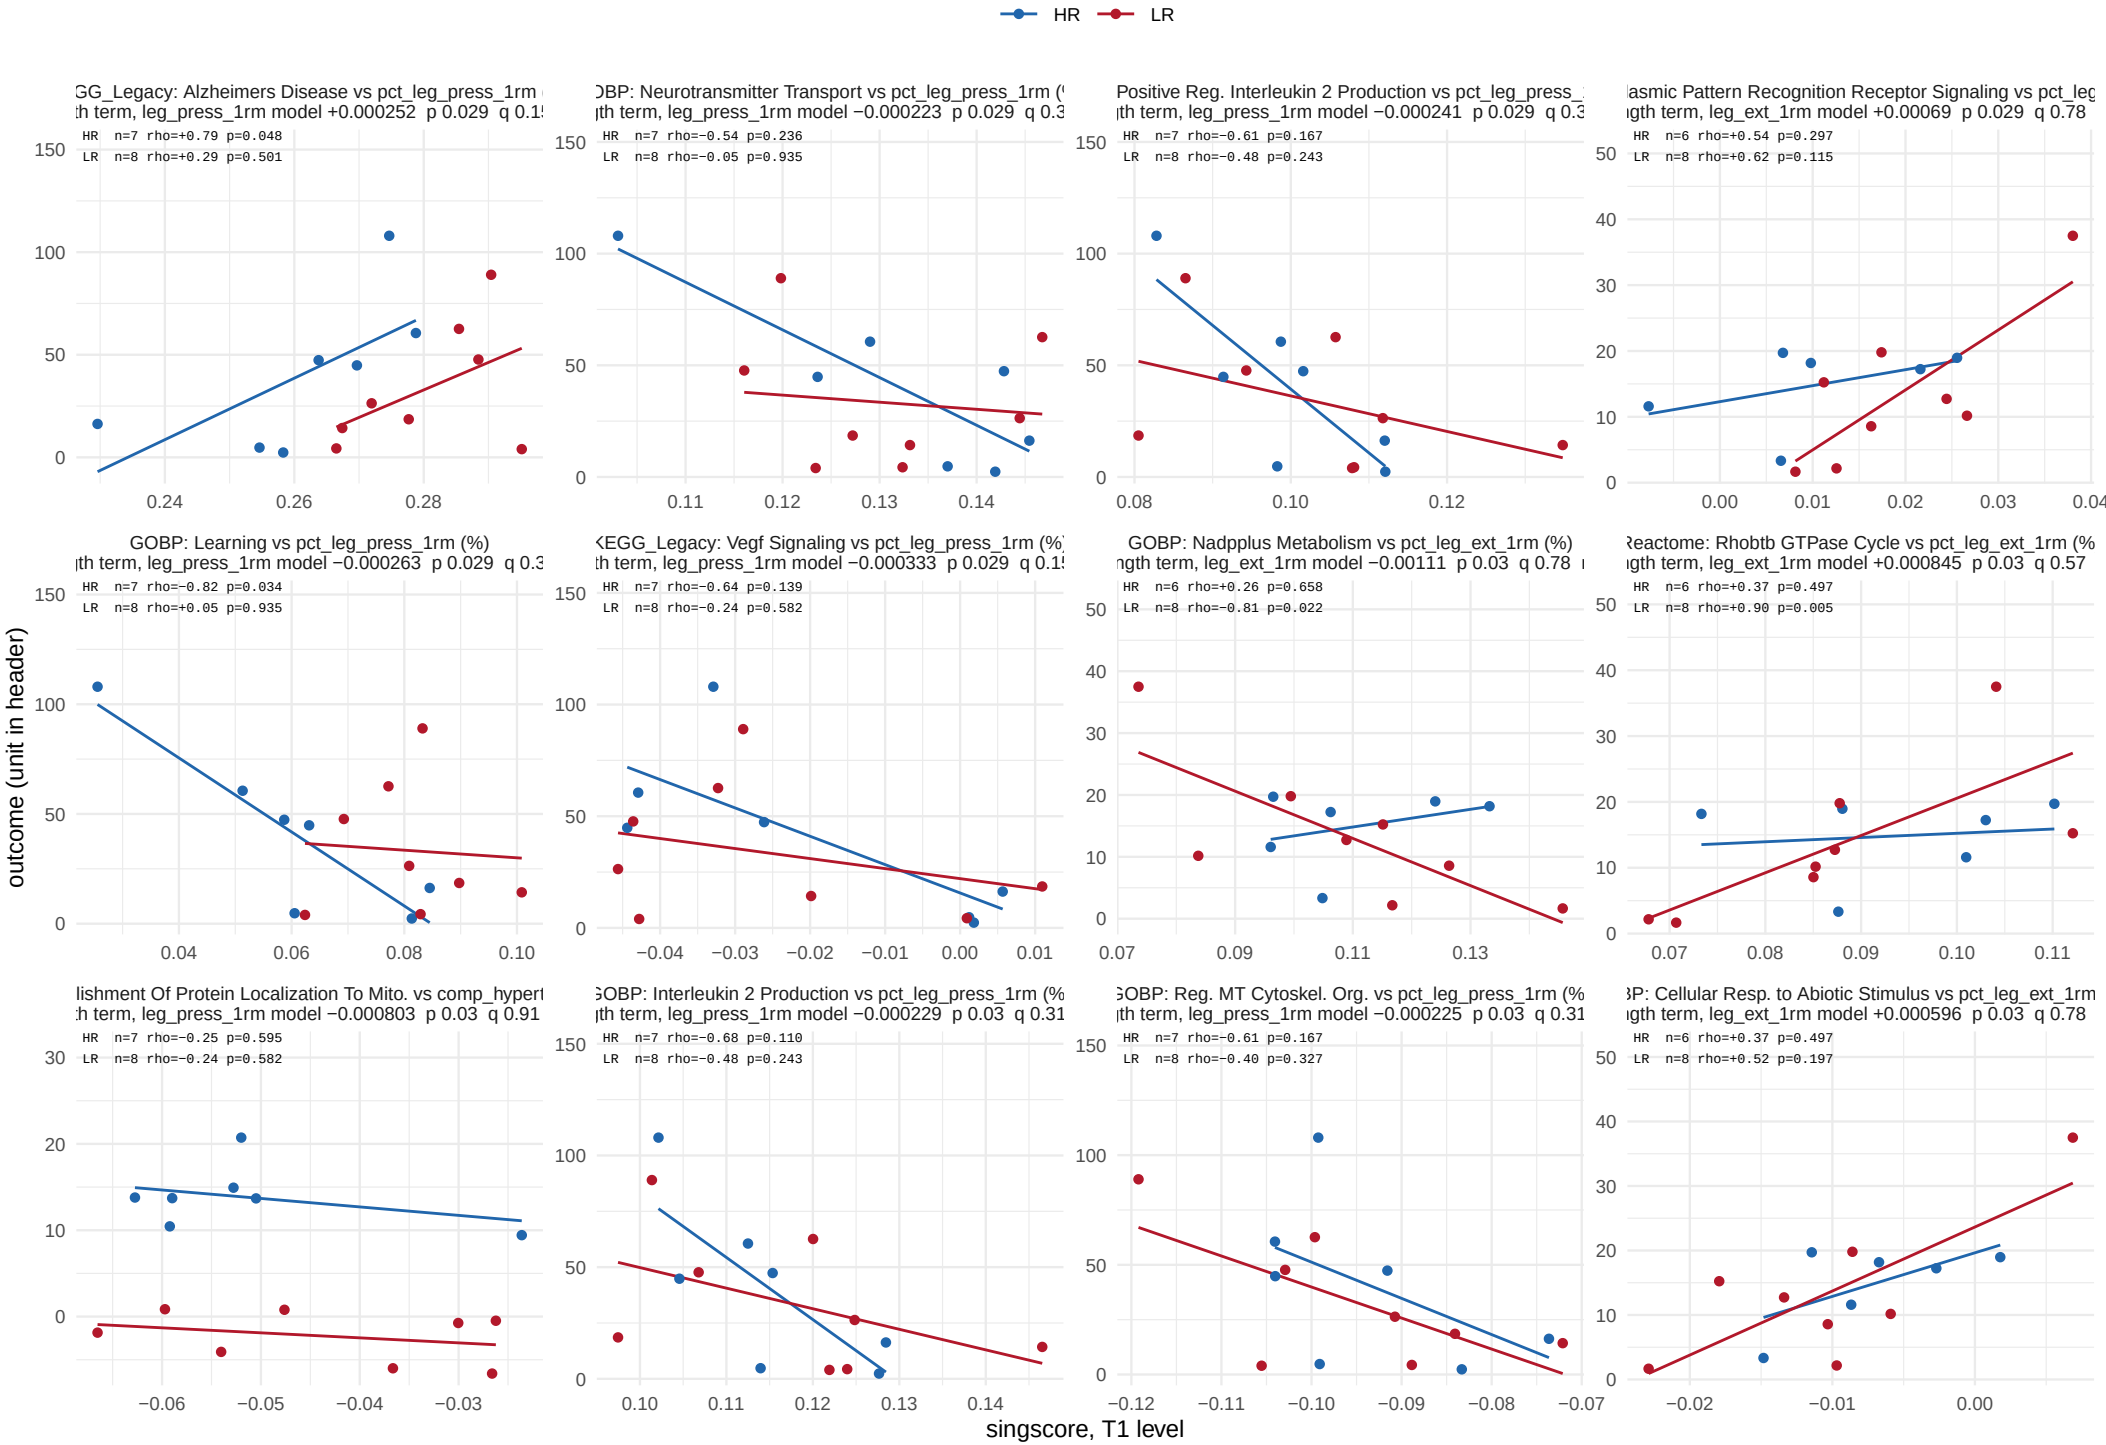

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, two_predictor.

Two predictor, baseline window


321 of 5512 feature−outcome pairs at p < 0.05, 6 at BH < 0.05. Page 19 of 27.

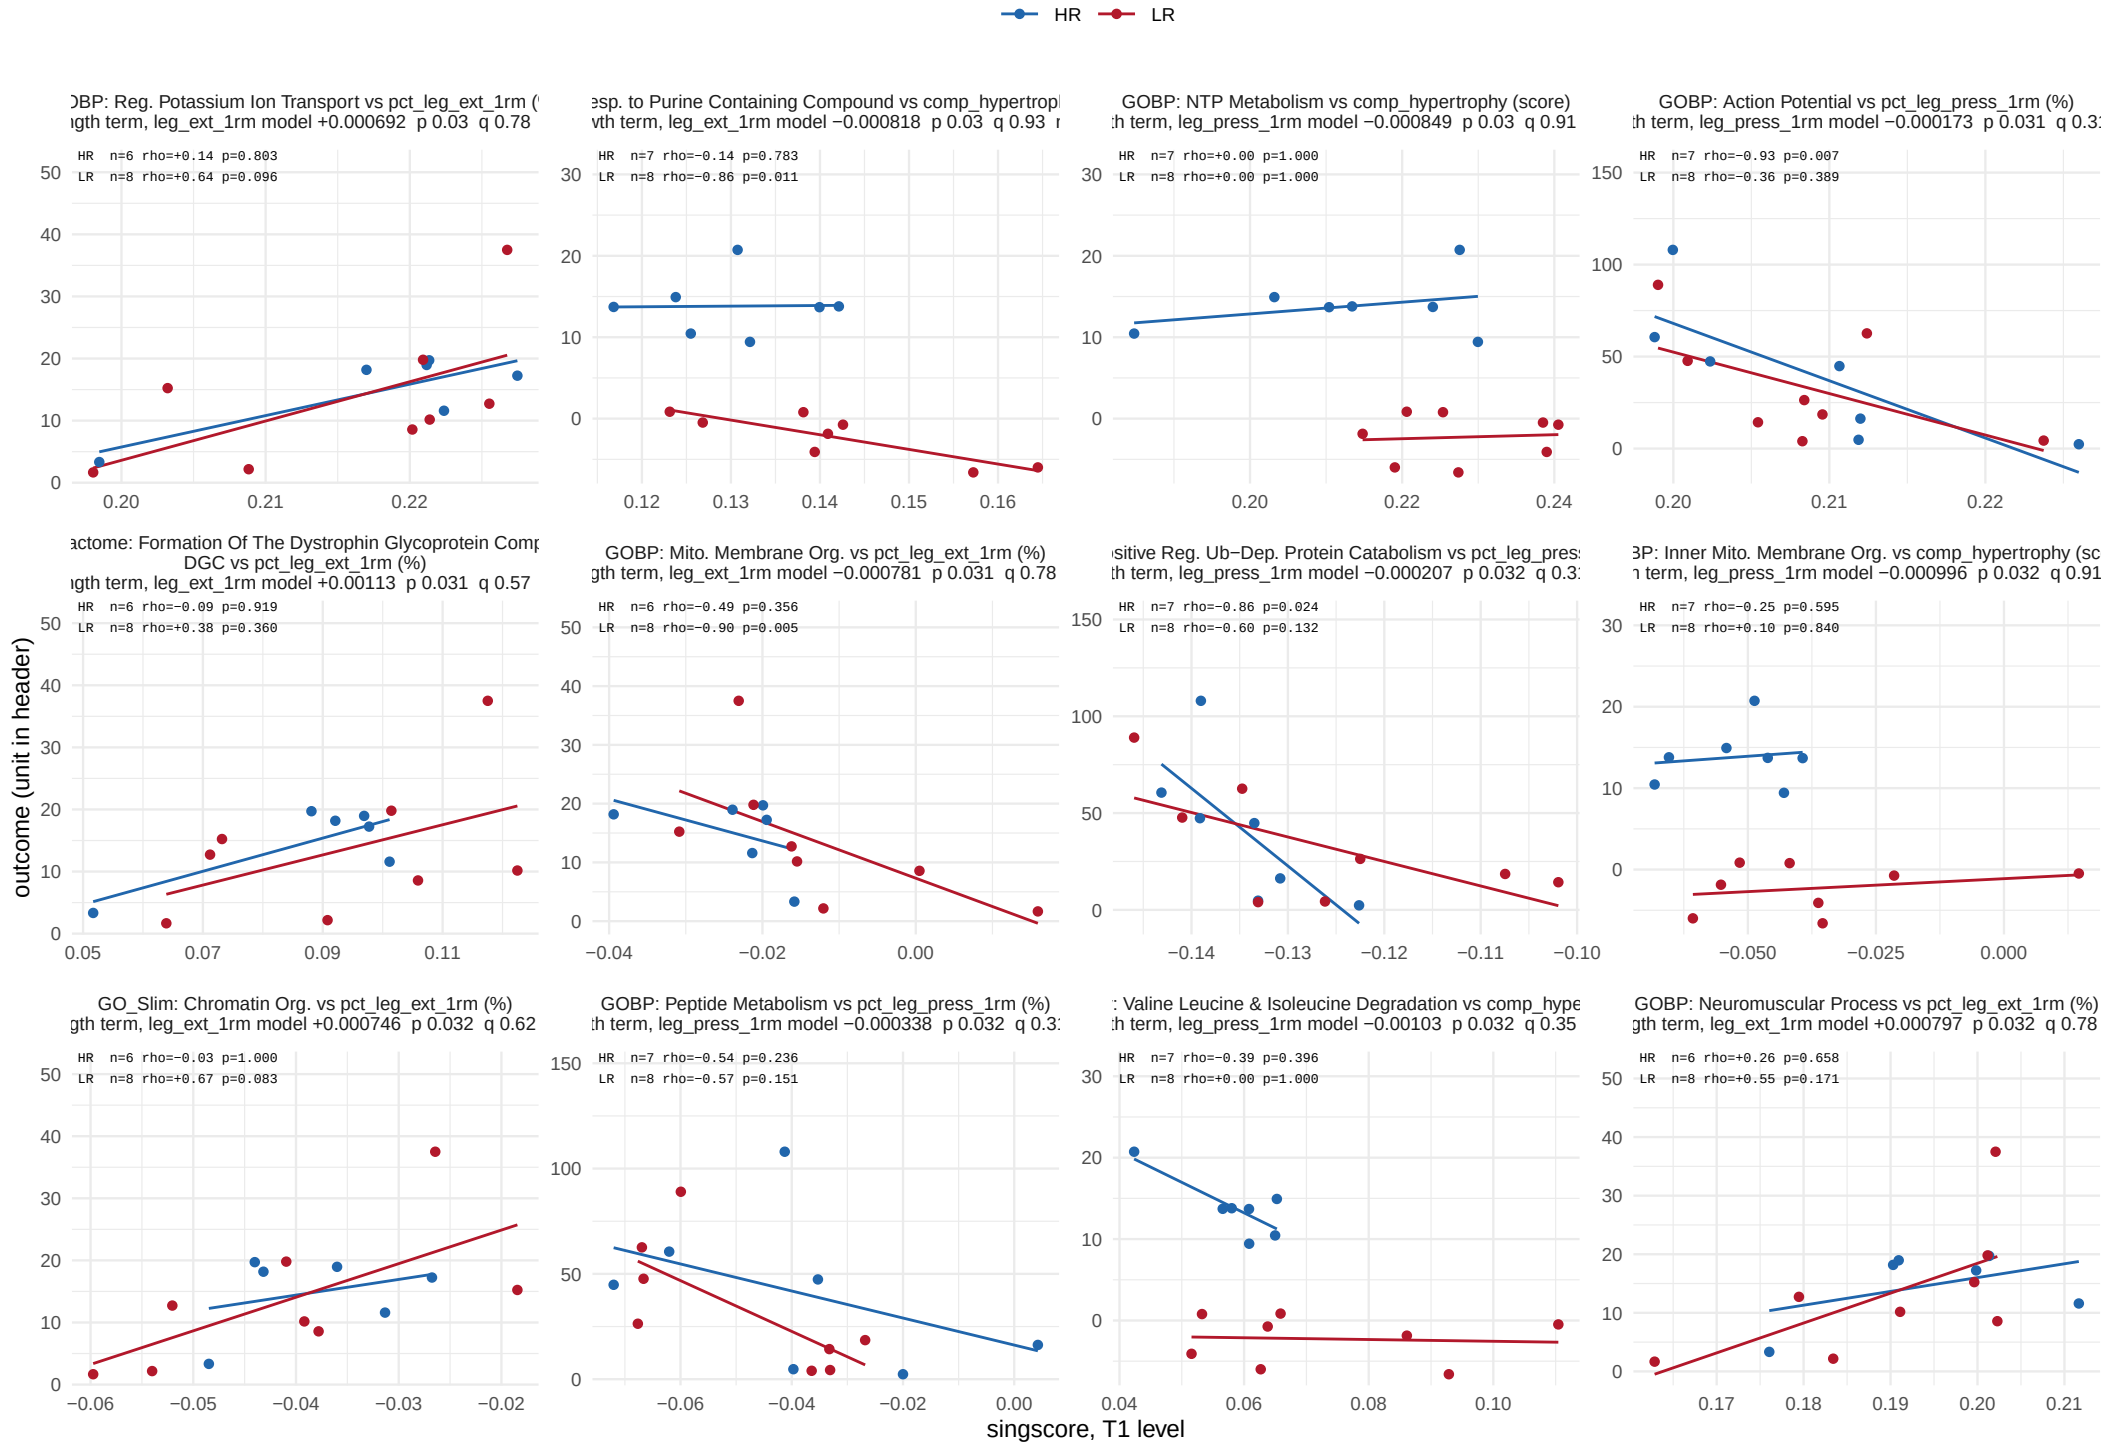

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, two_predictor.

Two predictor, baseline window


321 of 5512 feature−outcome pairs at p < 0.05, 6 at BH < 0.05. Page 20 of 27.

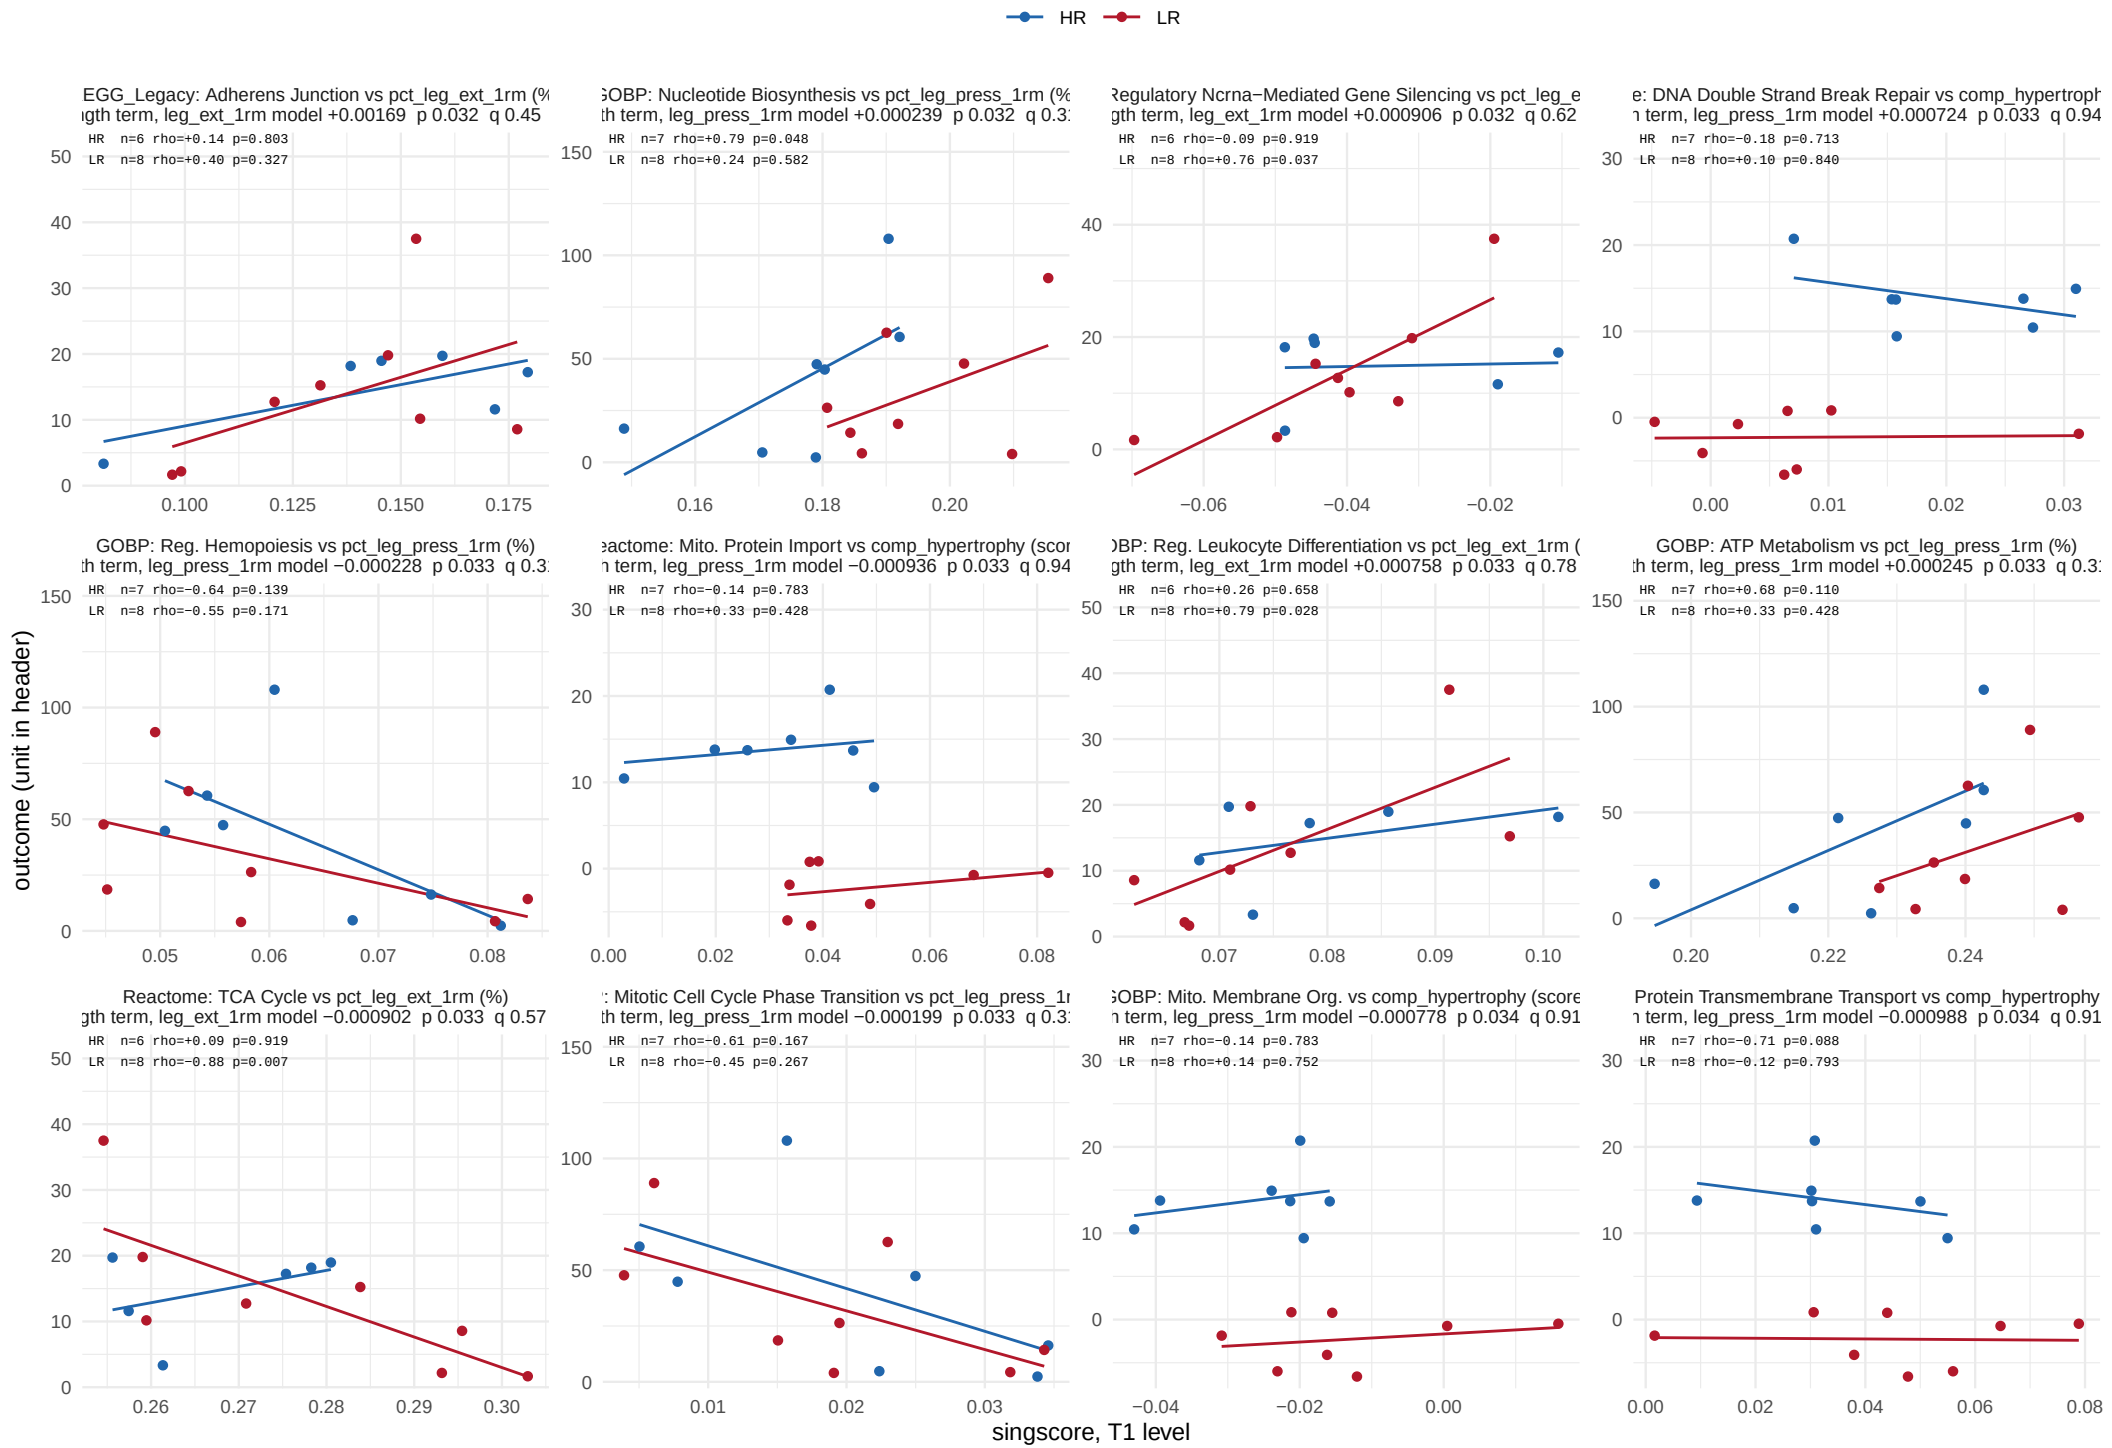

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, two_predictor.

Two predictor, baseline window


321 of 5512 feature−outcome pairs at p < 0.05, 6 at BH < 0.05. Page 21 of 27.

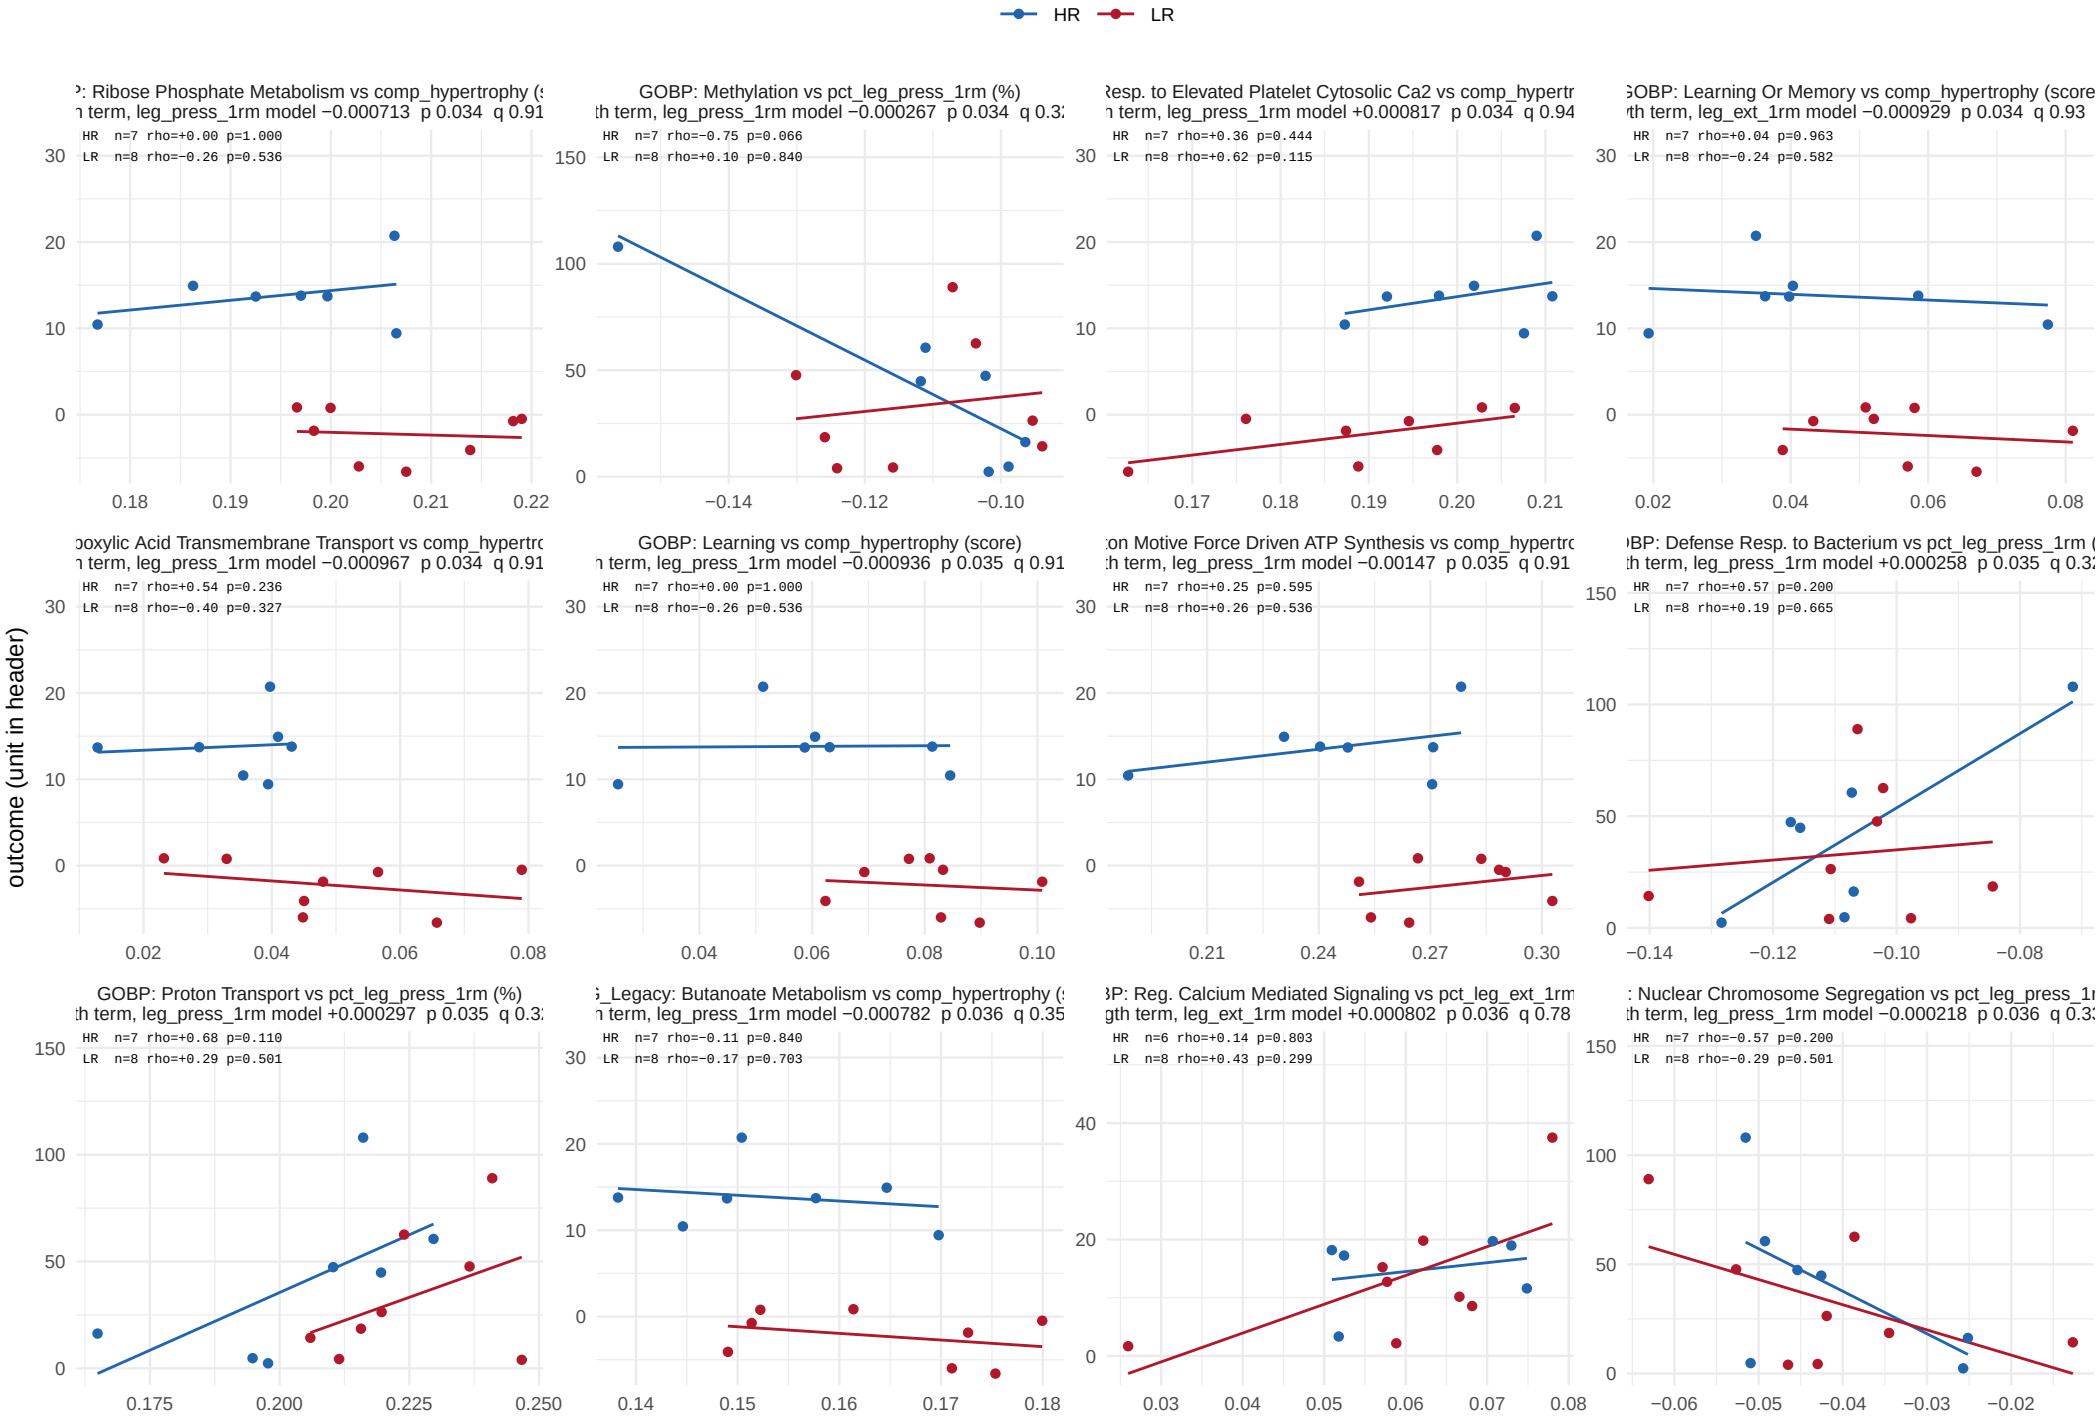

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, two_predictor.

Two predictor, baseline window


321 of 5512 feature−outcome pairs at p < 0.05, 6 at BH < 0.05. Page 22 of 27.

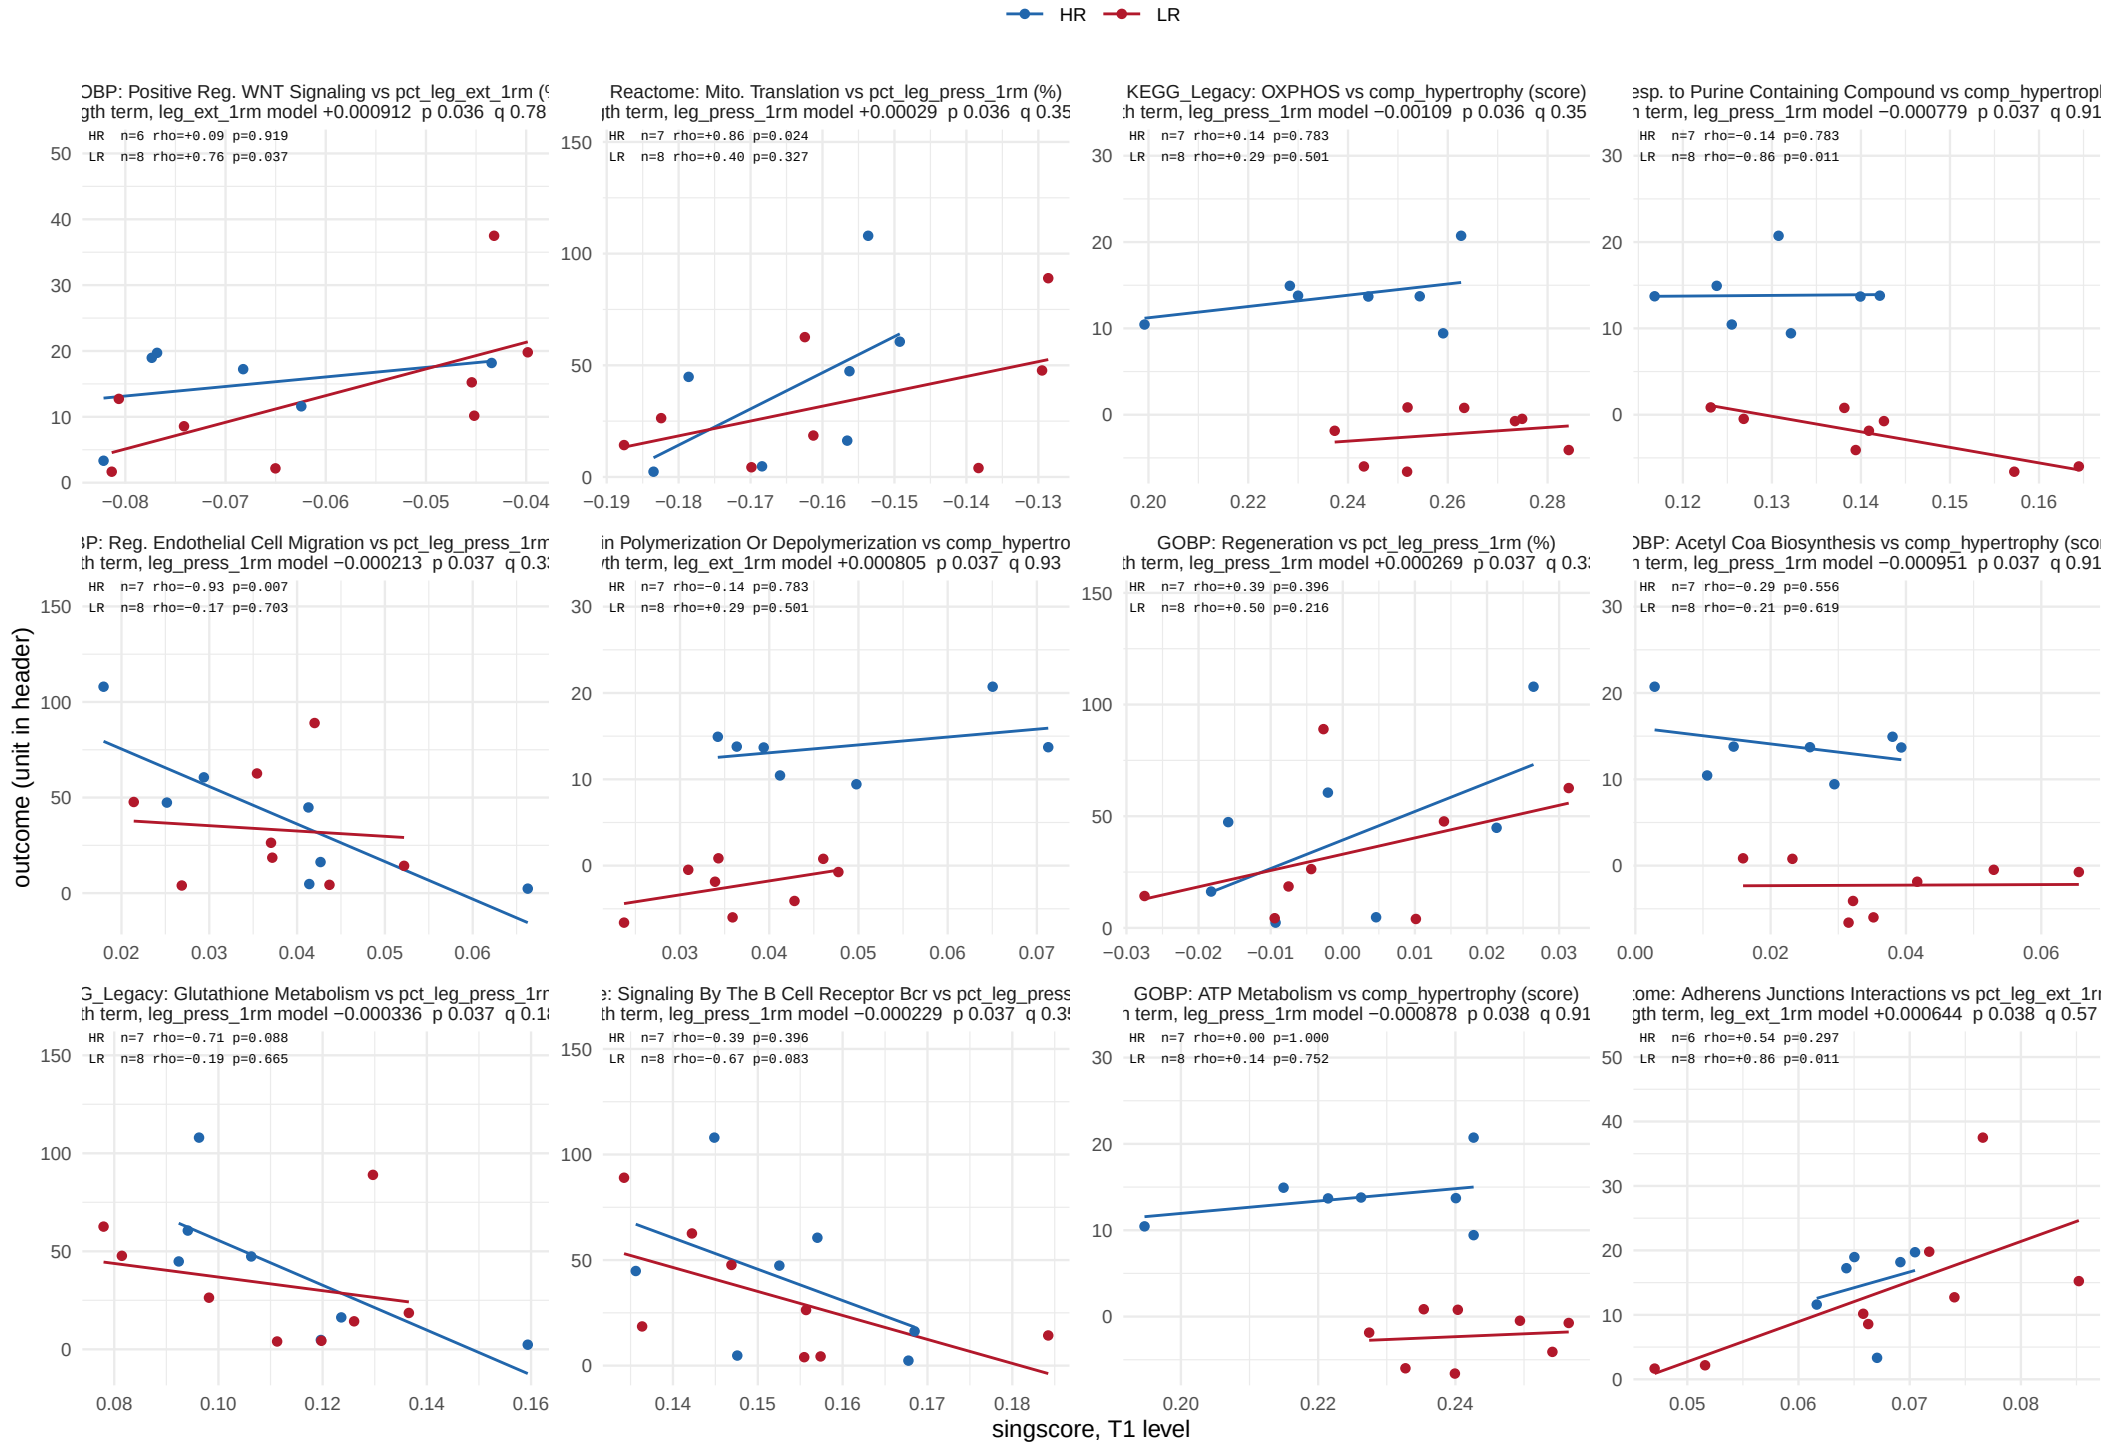

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, two_predictor.

Two predictor, baseline window


321 of 5512 feature−outcome pairs at p < 0.05, 6 at BH < 0.05. Page 23 of 27.

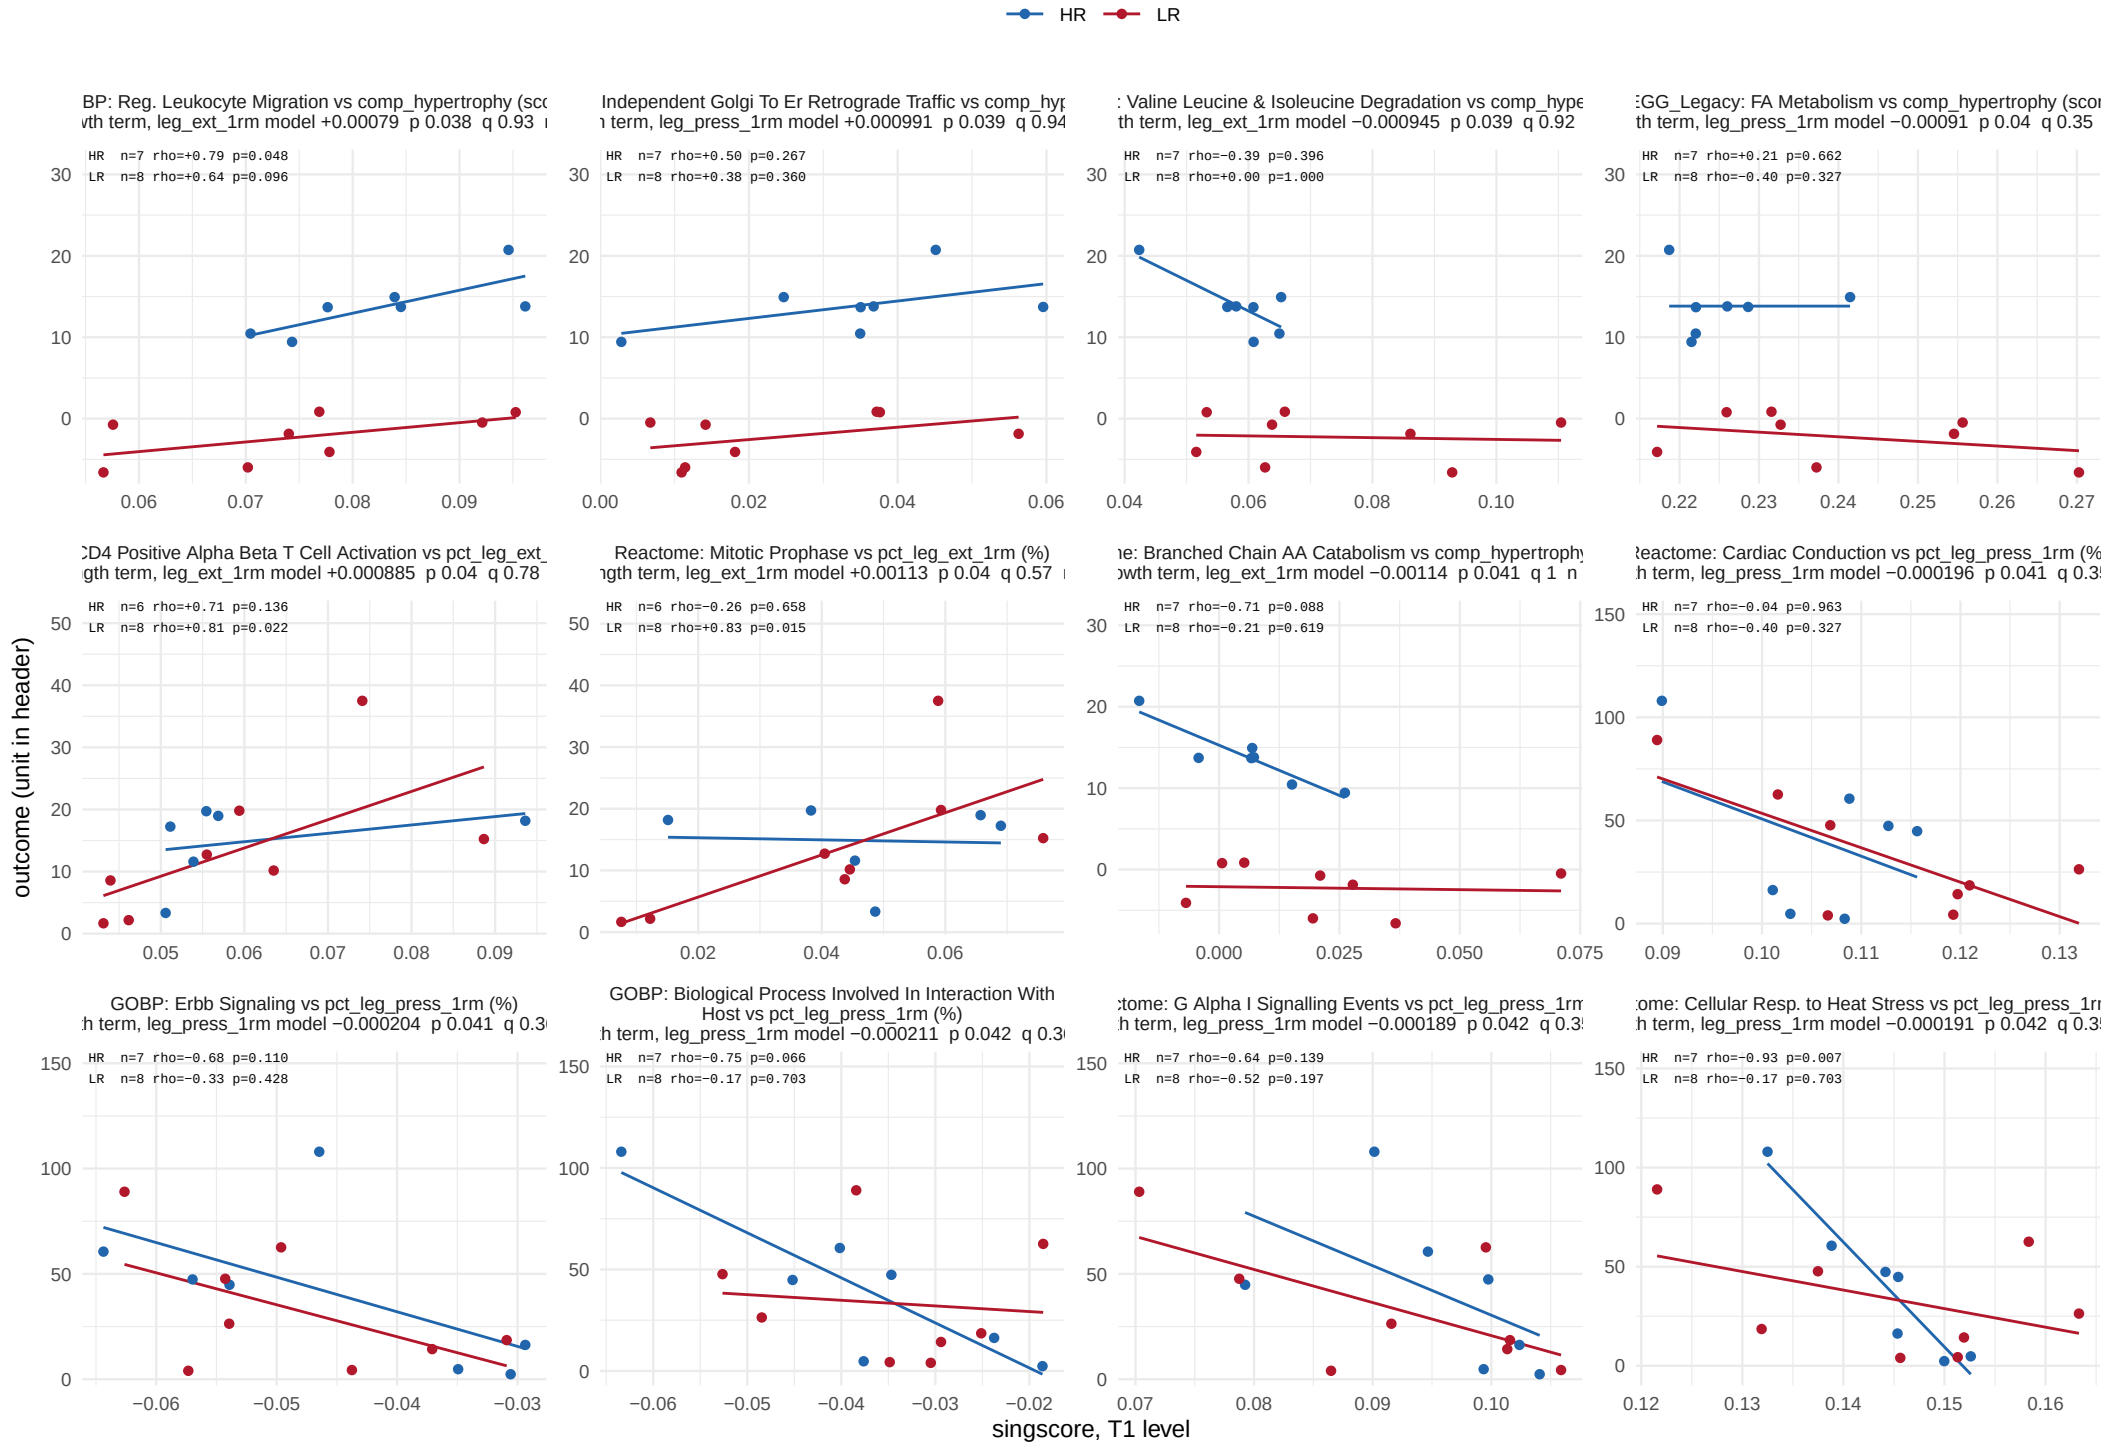

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, two_predictor.

Two predictor, baseline window


321 of 5512 feature−outcome pairs at p < 0.05, 6 at BH < 0.05. Page 24 of 27.

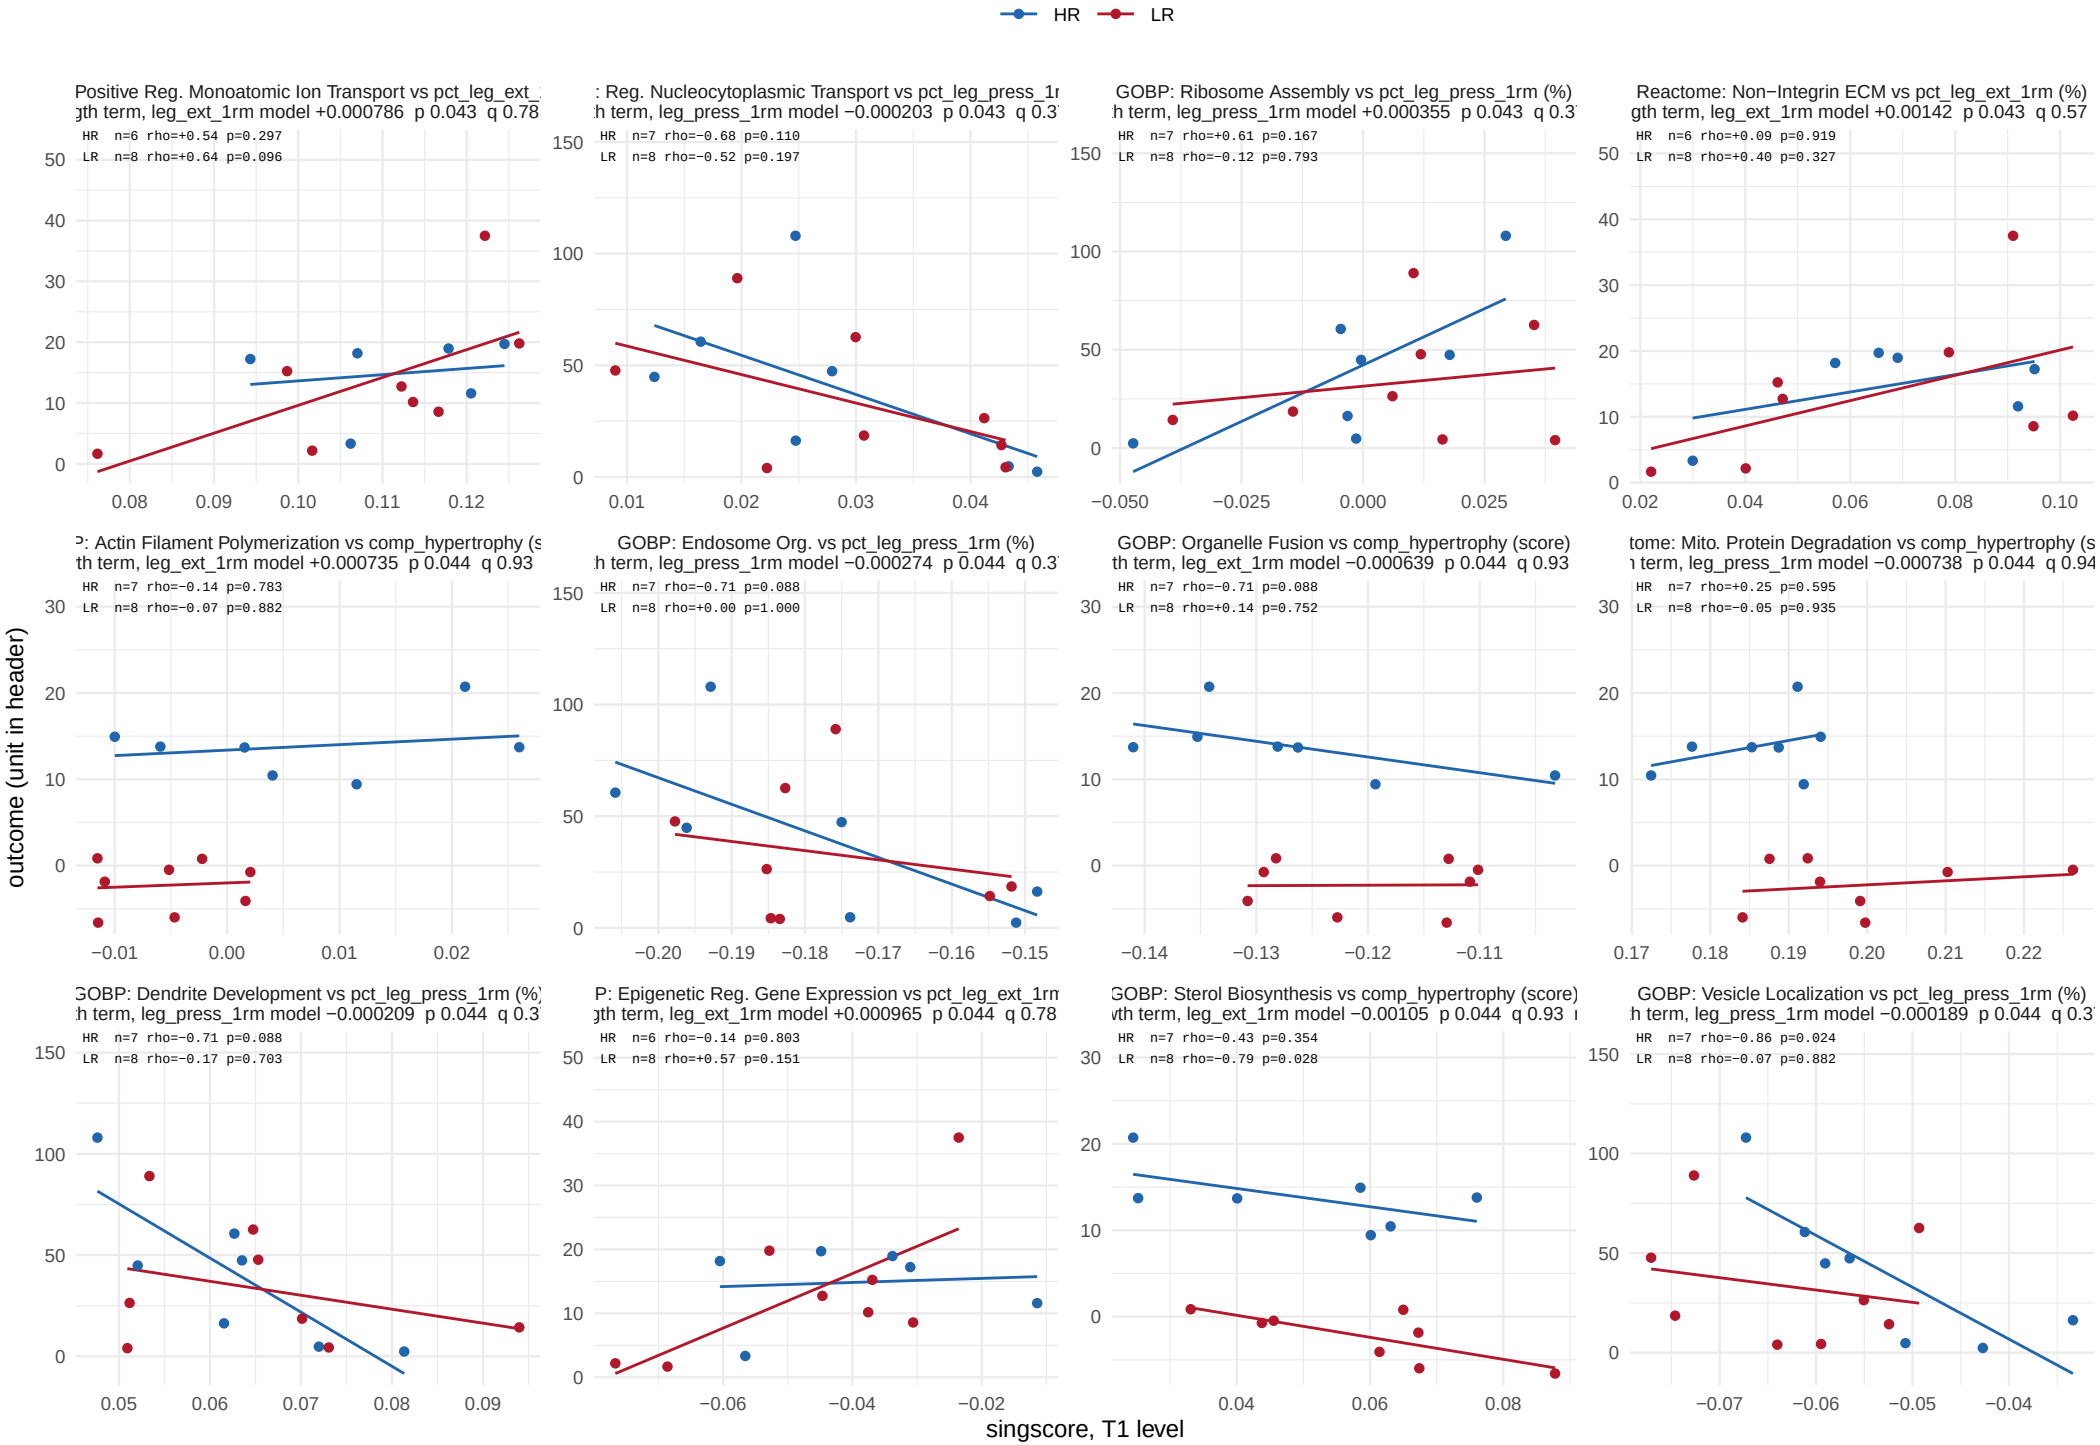

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, two_predictor.

Two predictor, baseline window


321 of 5512 feature−outcome pairs at p < 0.05, 6 at BH < 0.05. Page 25 of 27.

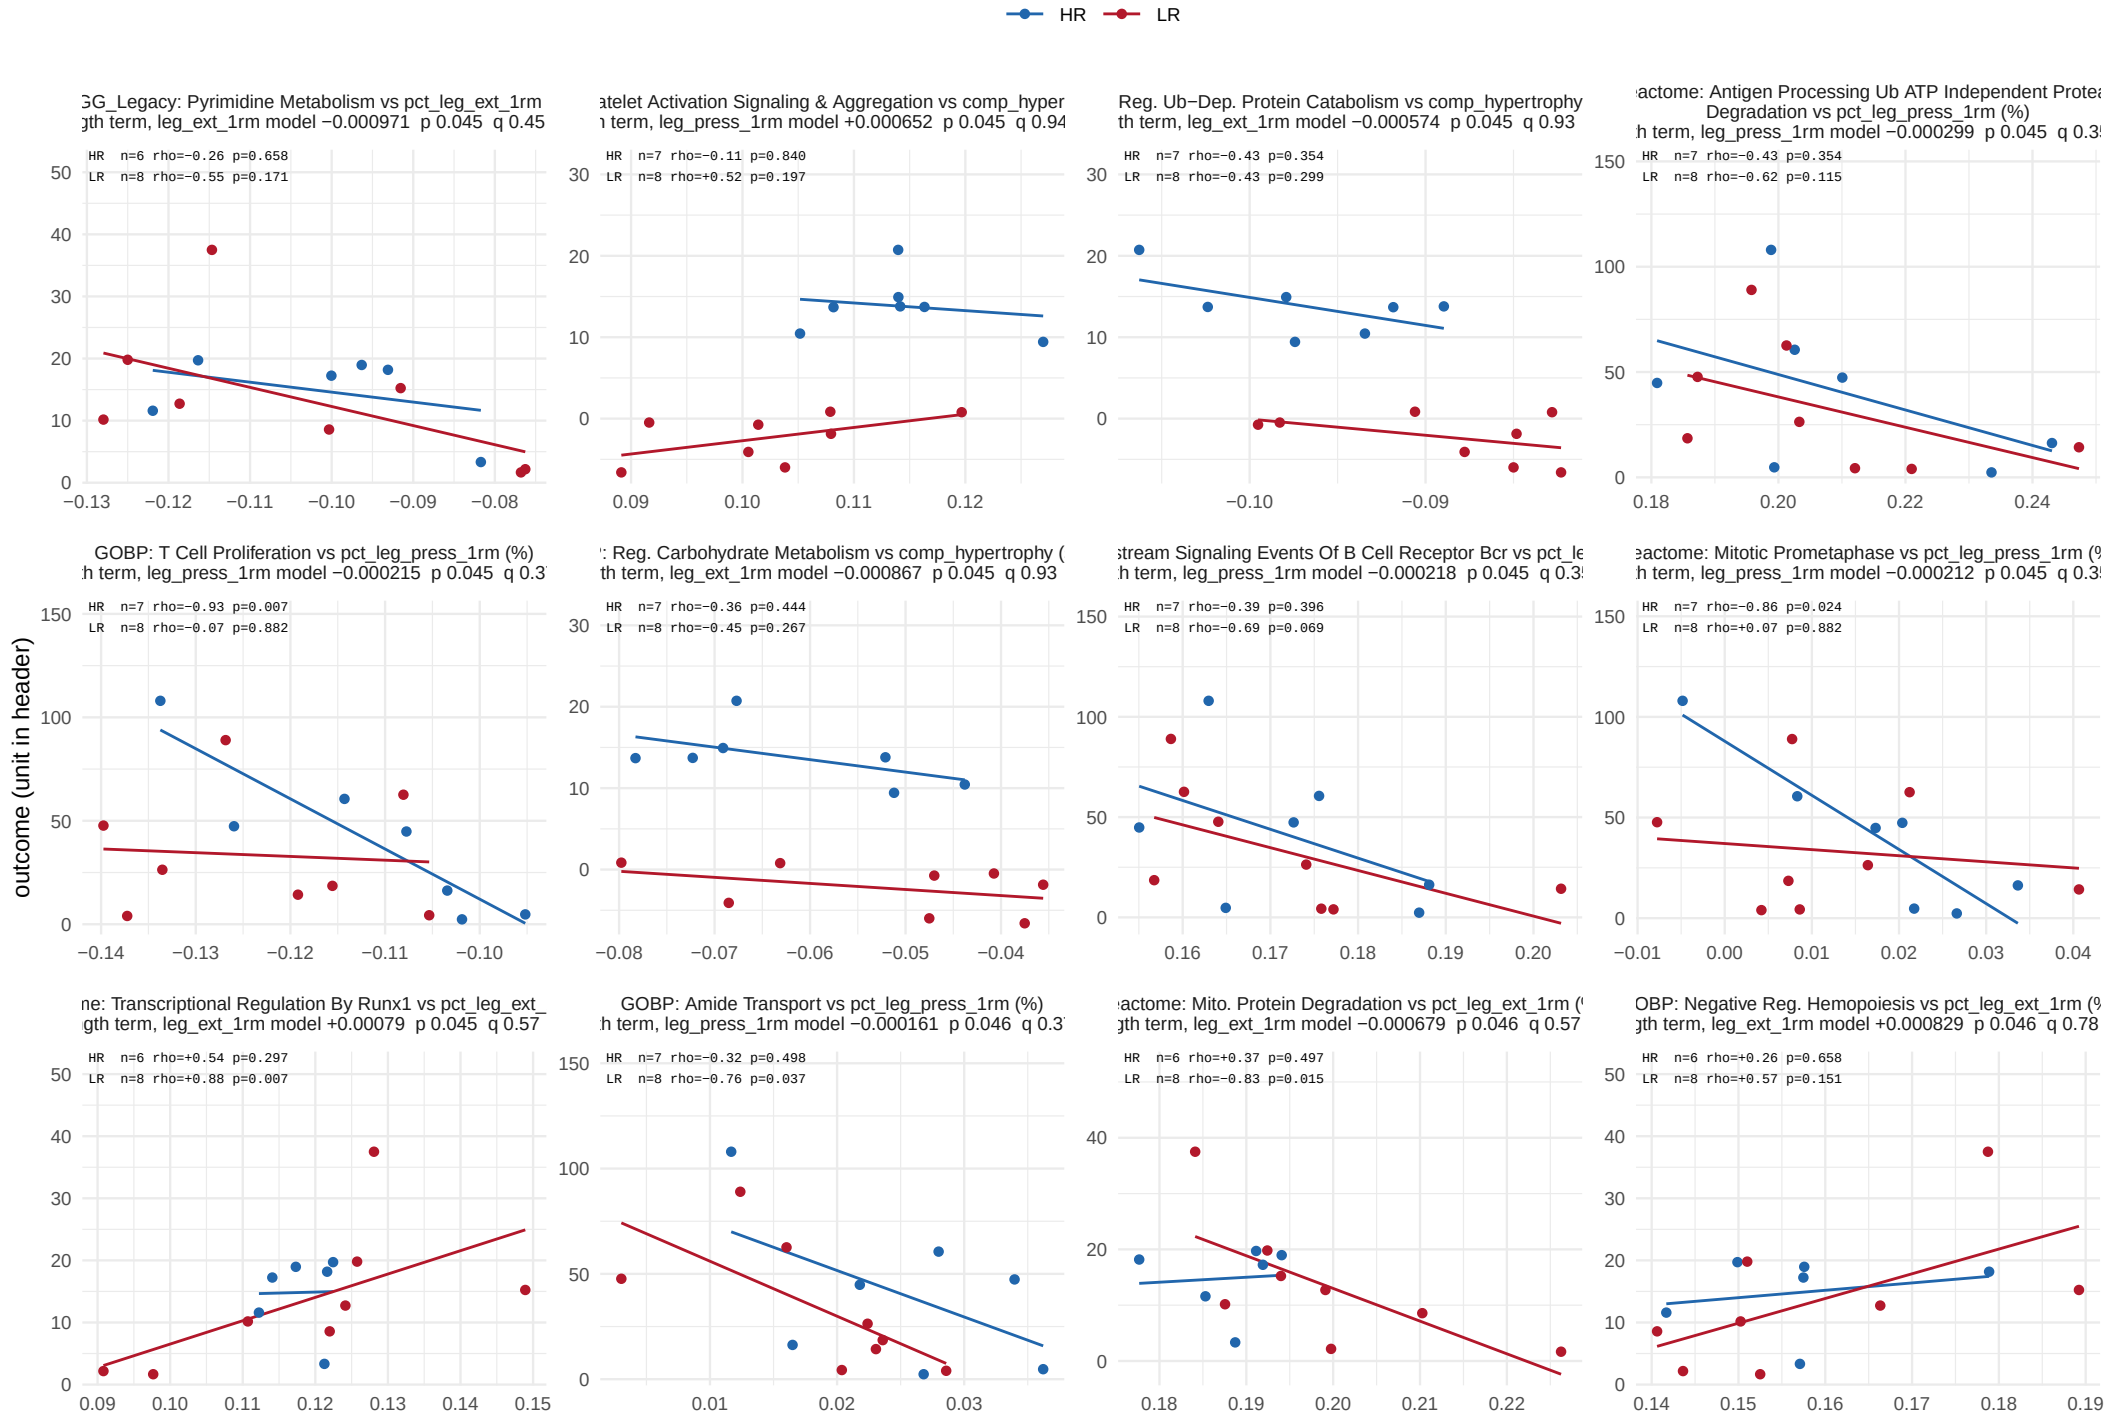

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, two_predictor.

Two predictor, baseline window


321 of 5512 feature−outcome pairs at p < 0.05, 6 at BH < 0.05. Page 26 of 27.

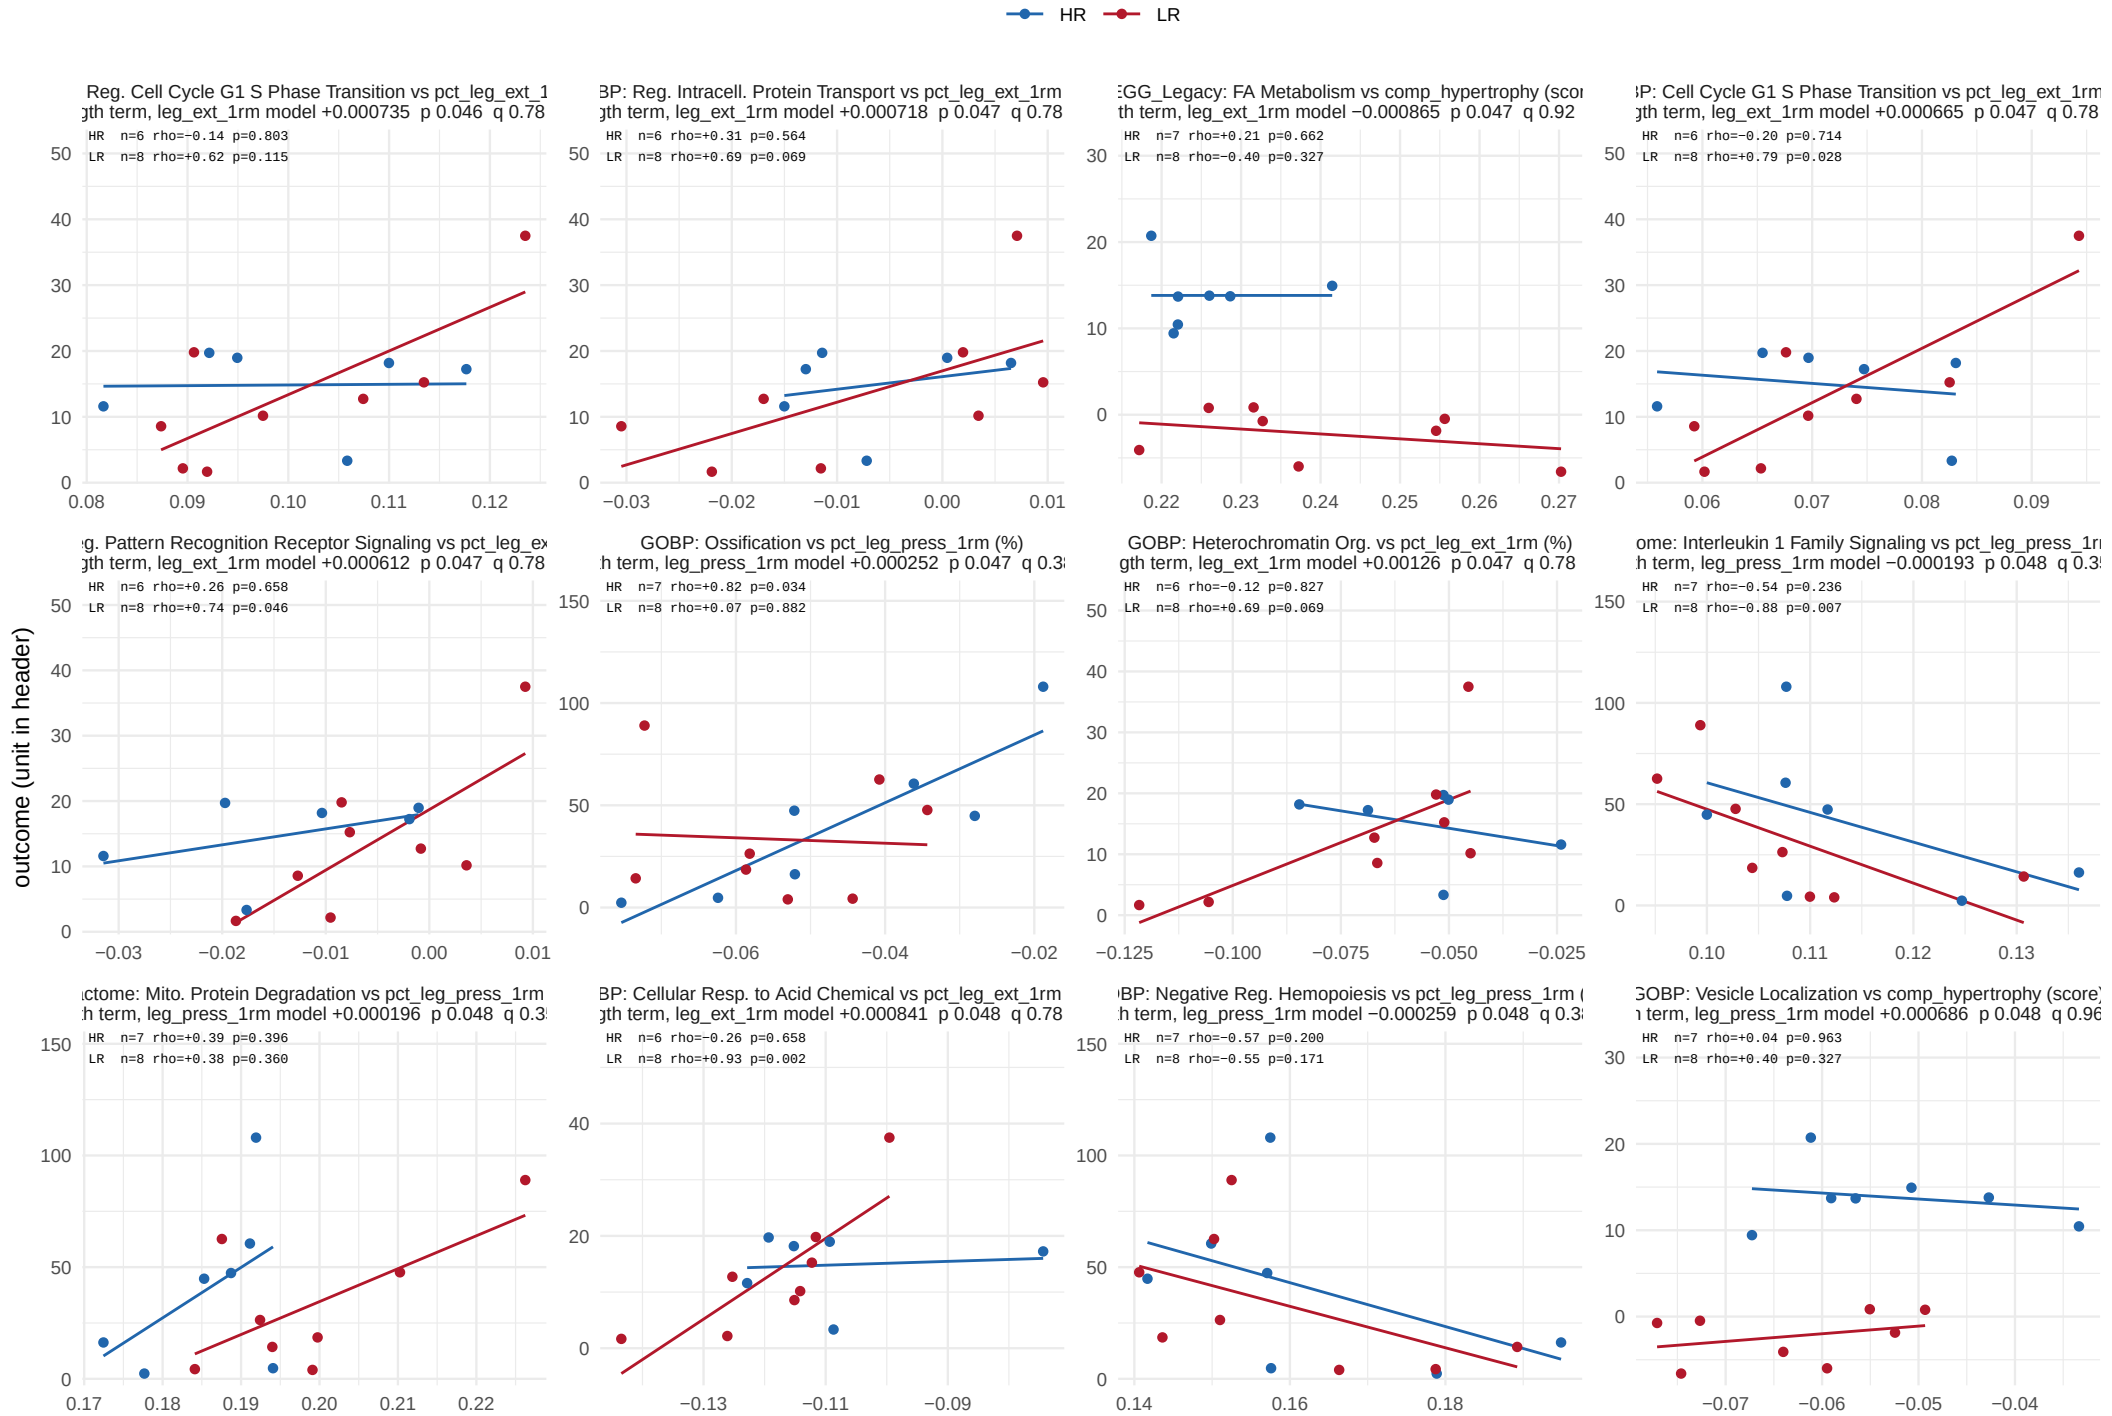

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, two_predictor.

Two predictor, baseline window


321 of 5512 feature−outcome pairs at p < 0.05, 6 at BH < 0.05. Page 27 of 27.

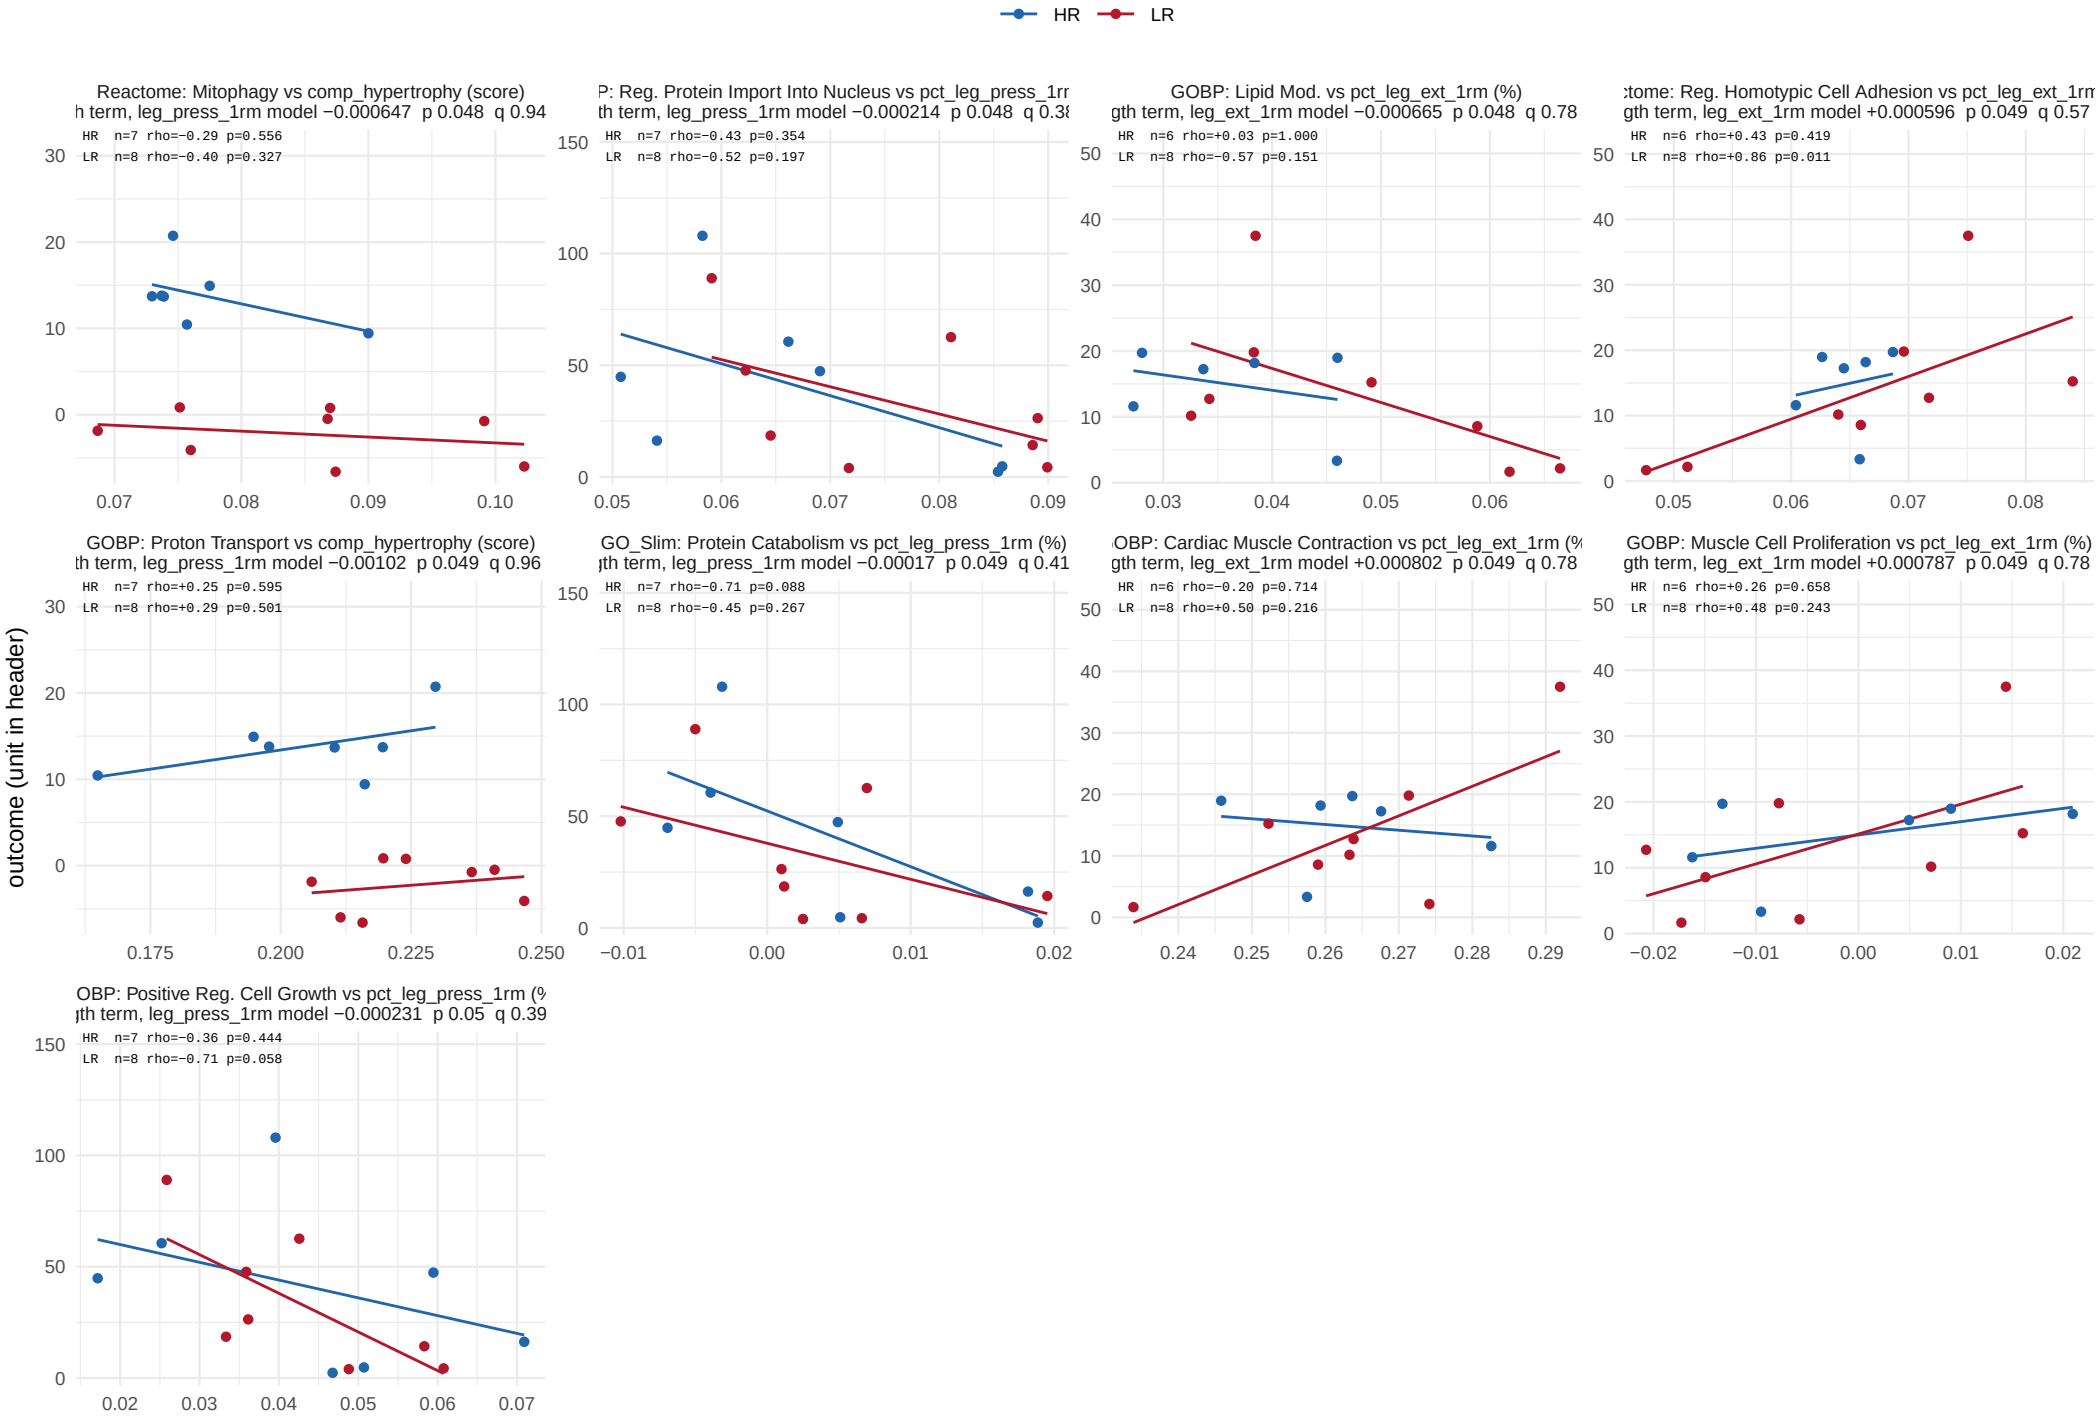

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, two_predictor.

Two predictor, acute window


242 of 5512 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 1 of 21.

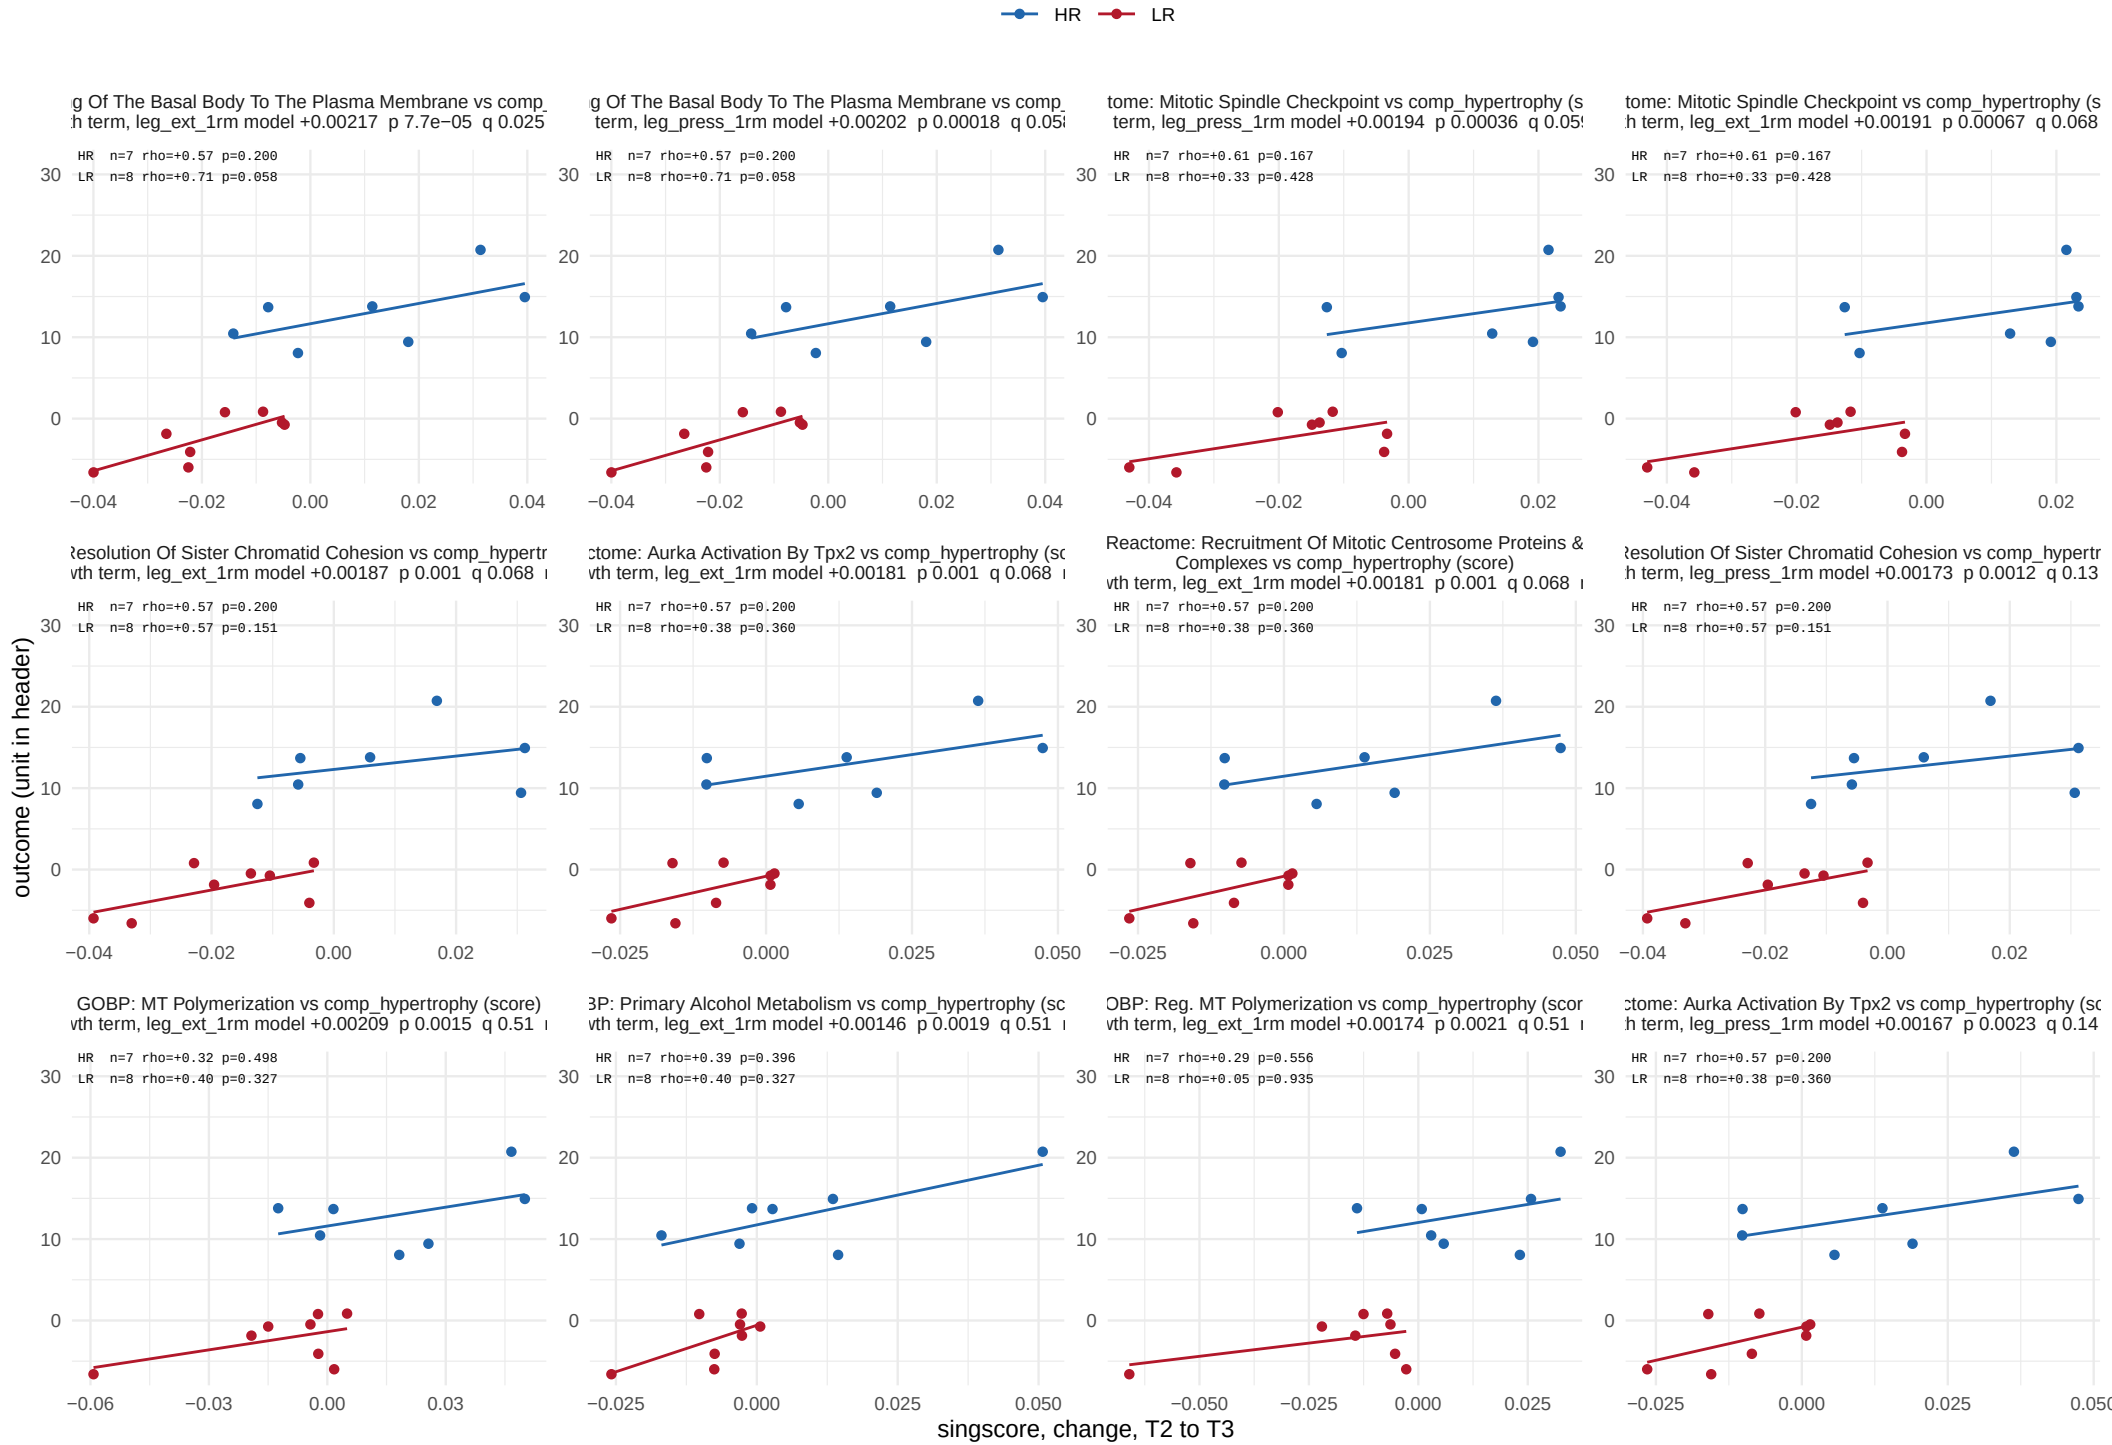

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, two_predictor.

Two predictor, acute window


242 of 5512 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 2 of 21.

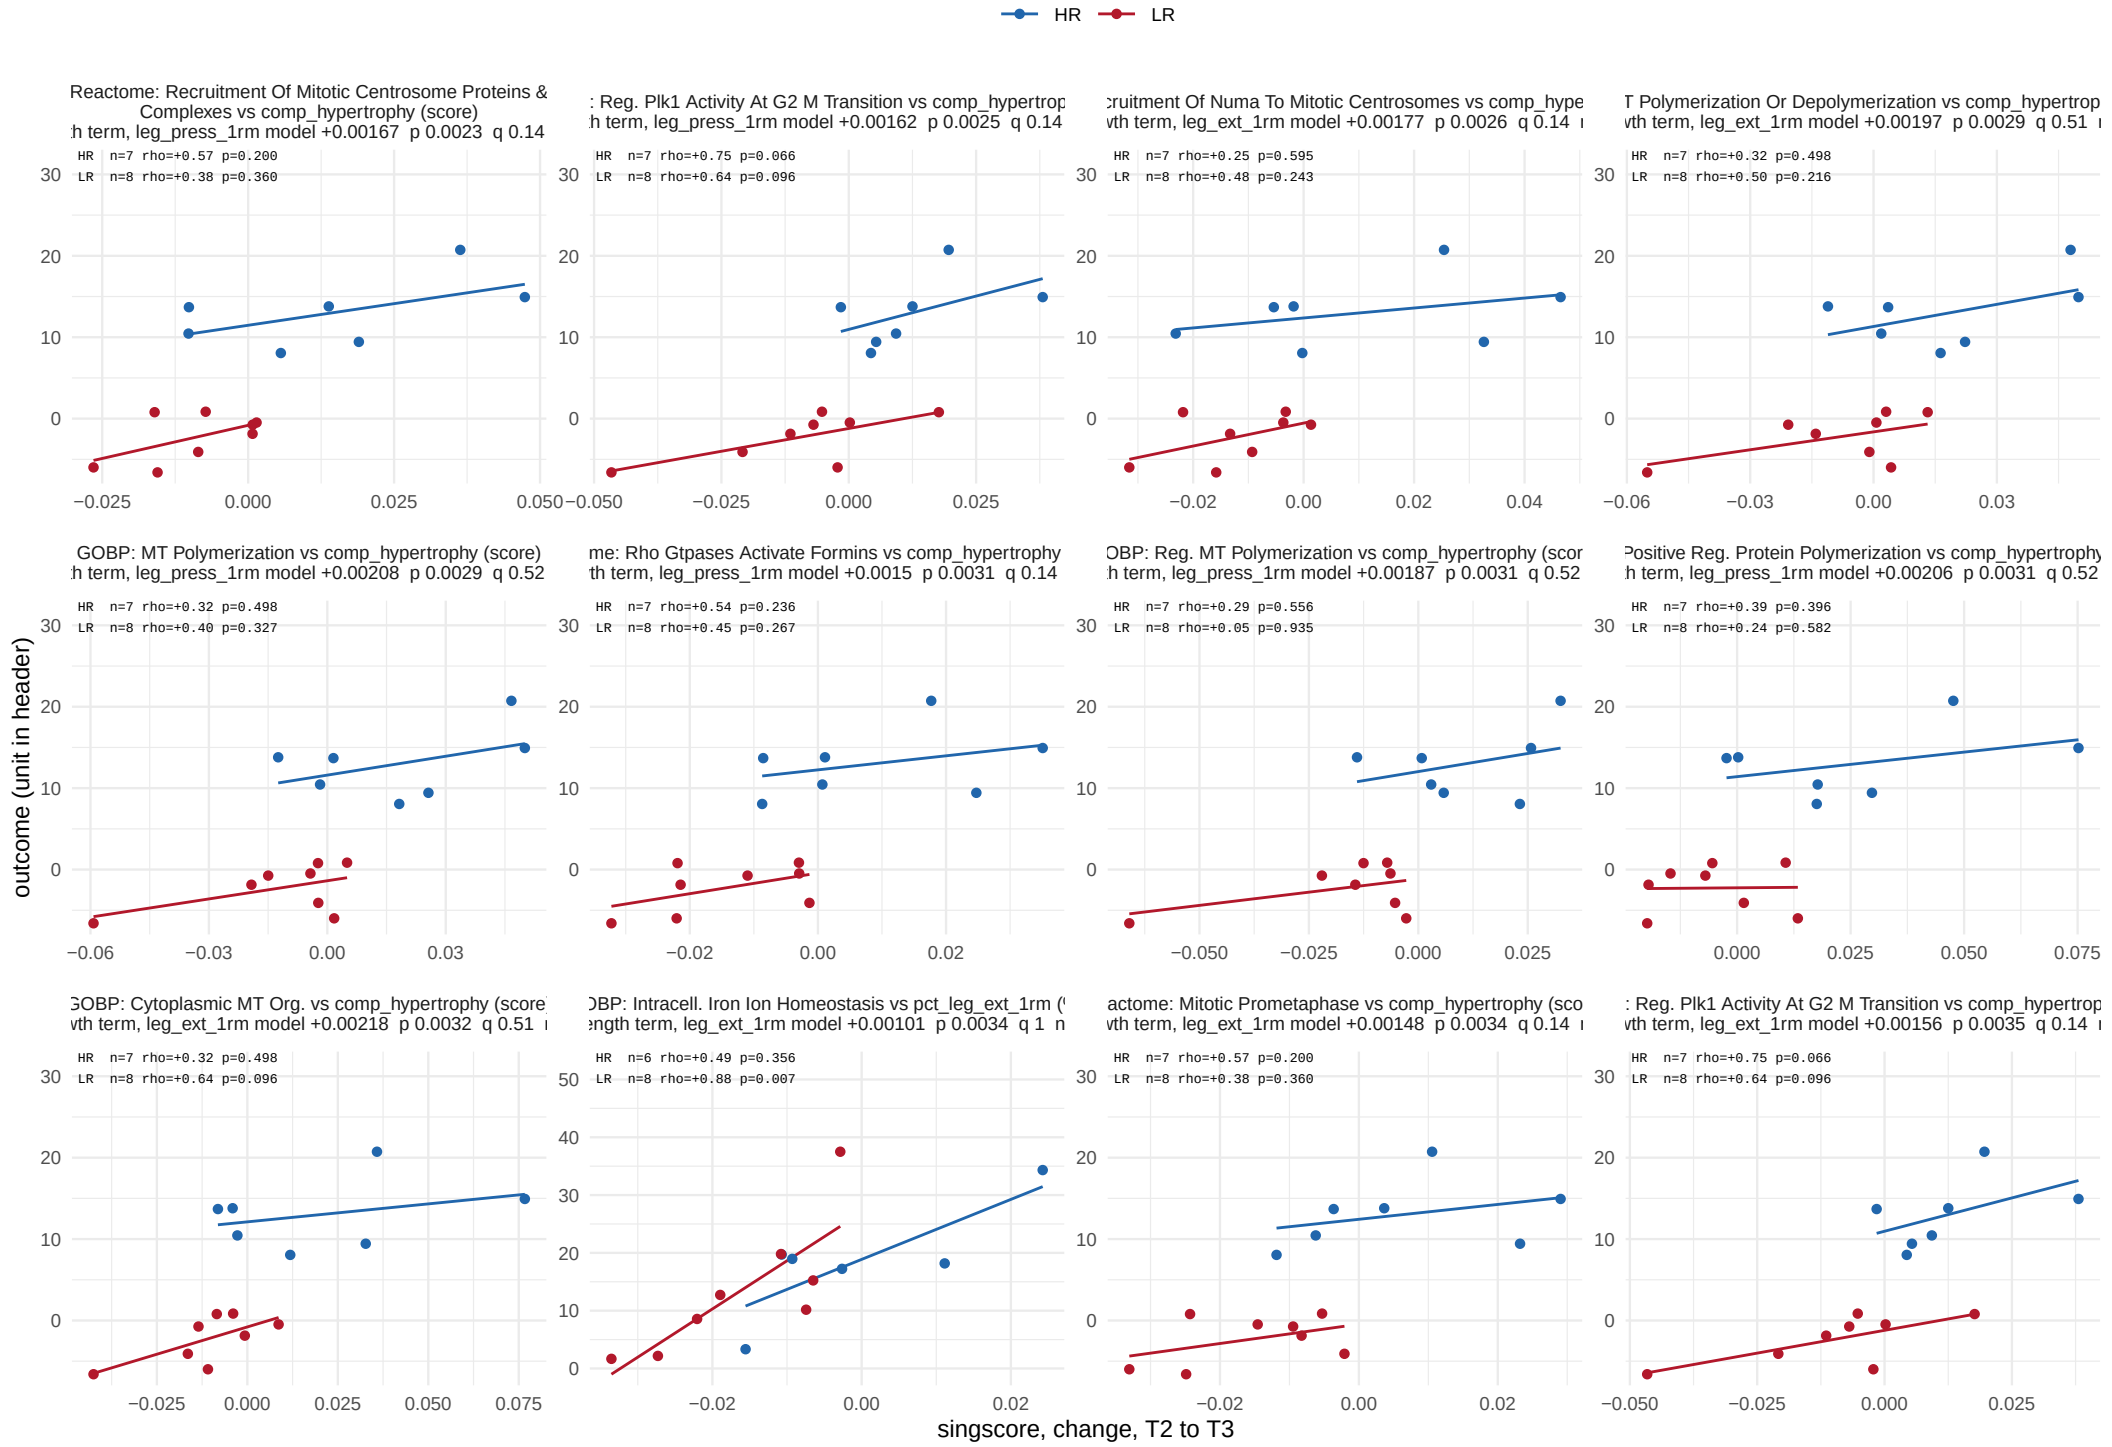

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, two_predictor.

Two predictor, acute window


242 of 5512 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 3 of 21.

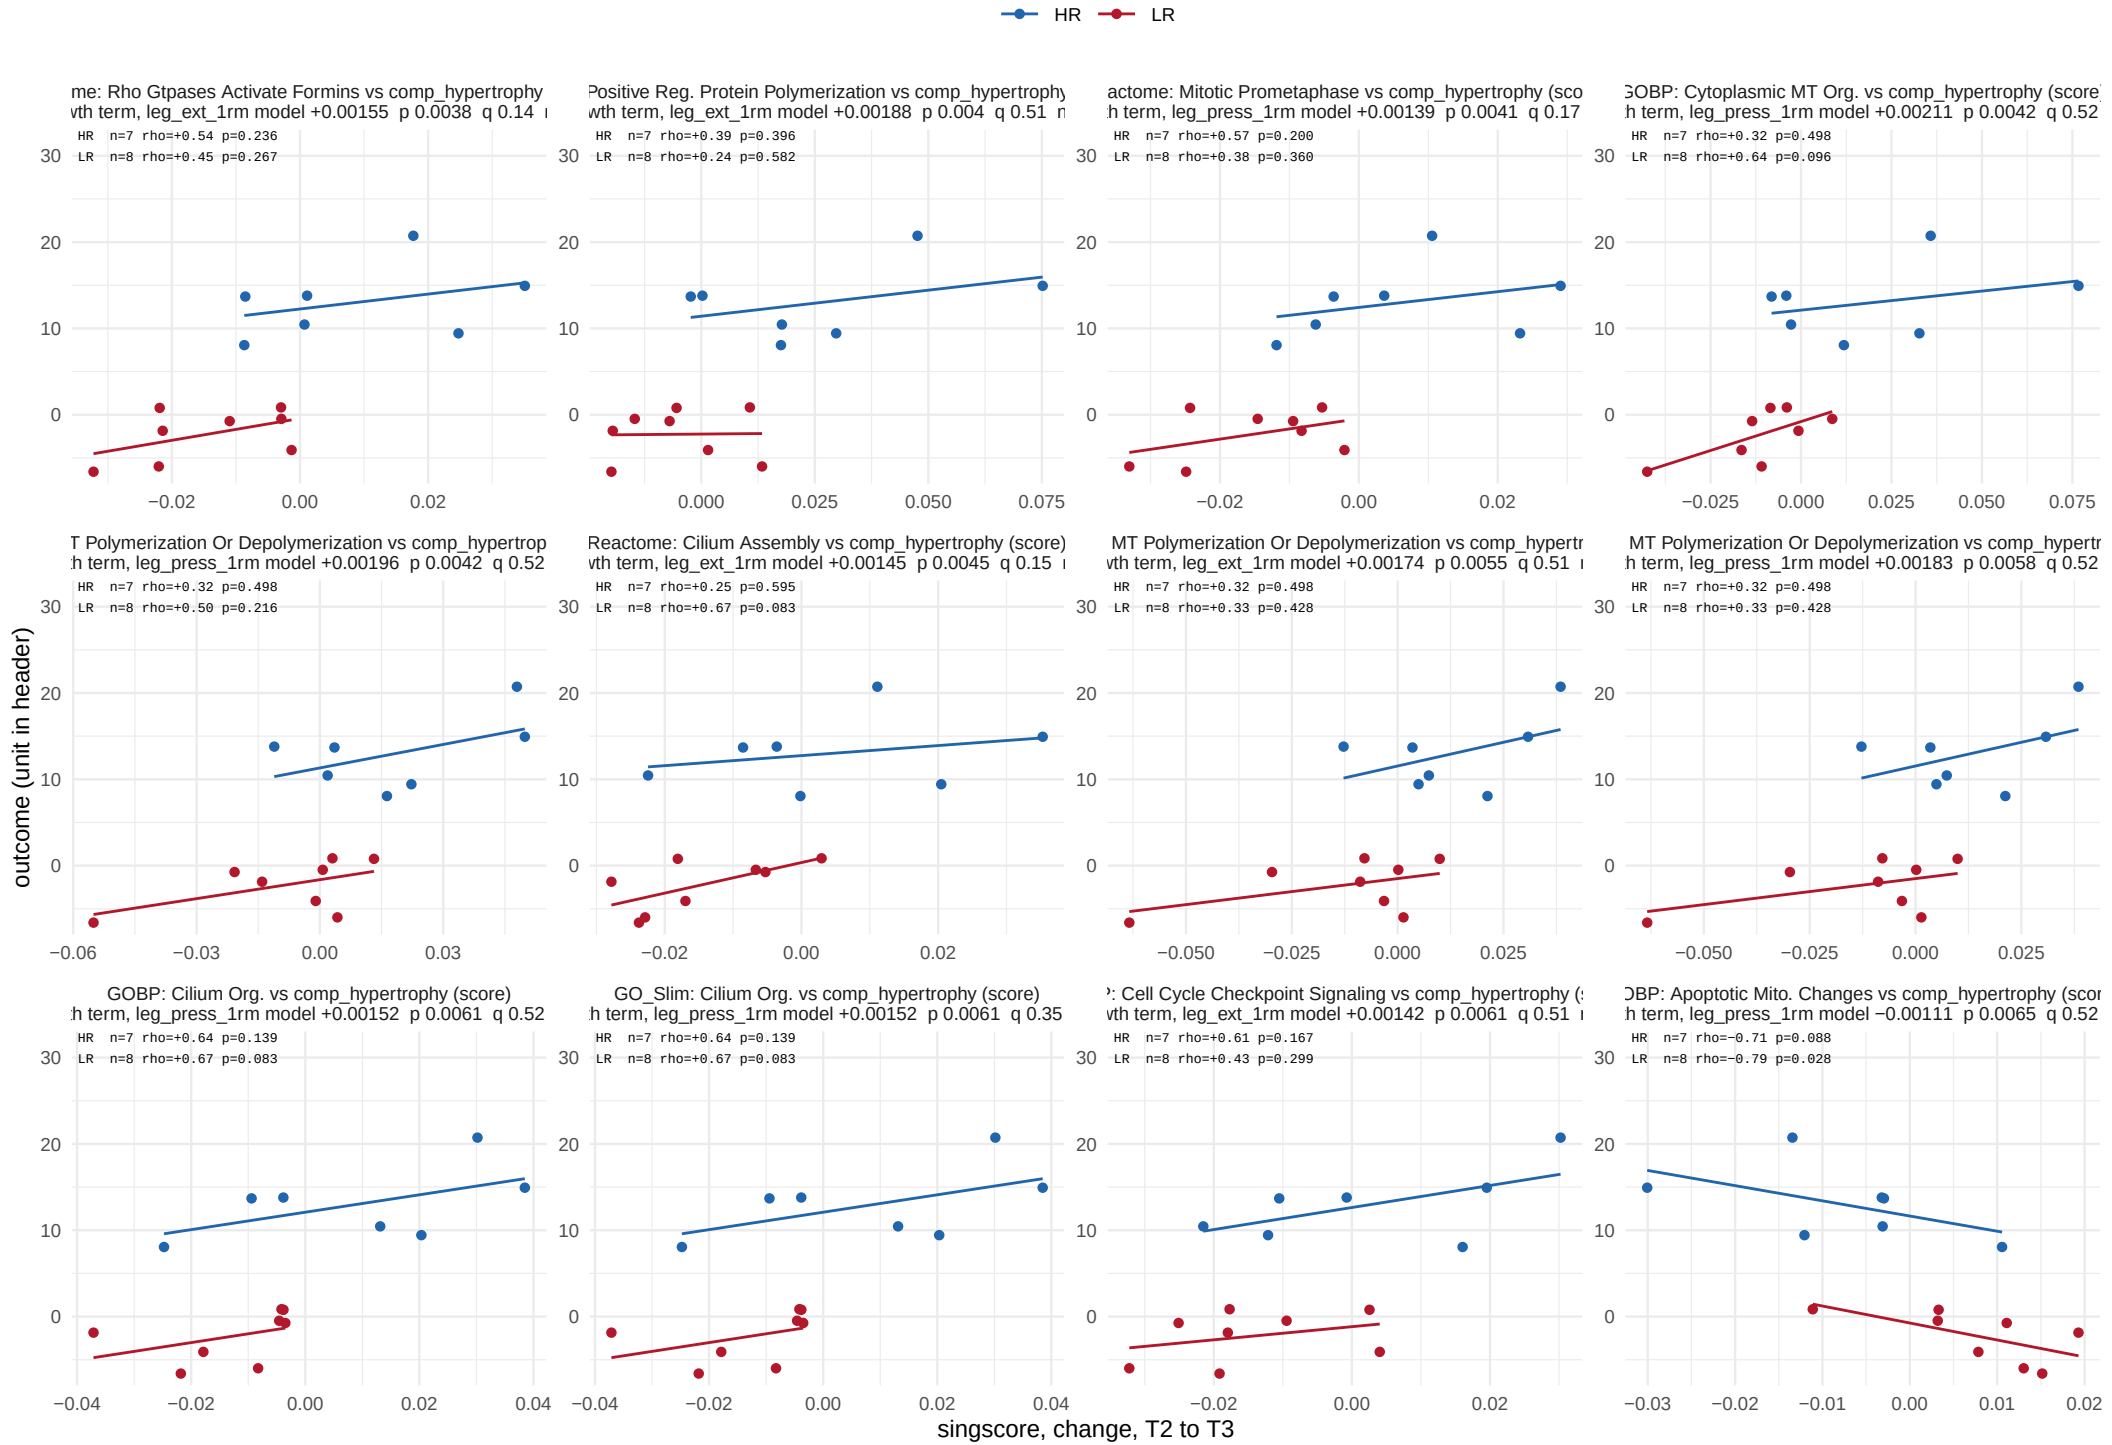

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, two_predictor.

Two predictor, acute window


242 of 5512 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 4 of 21.

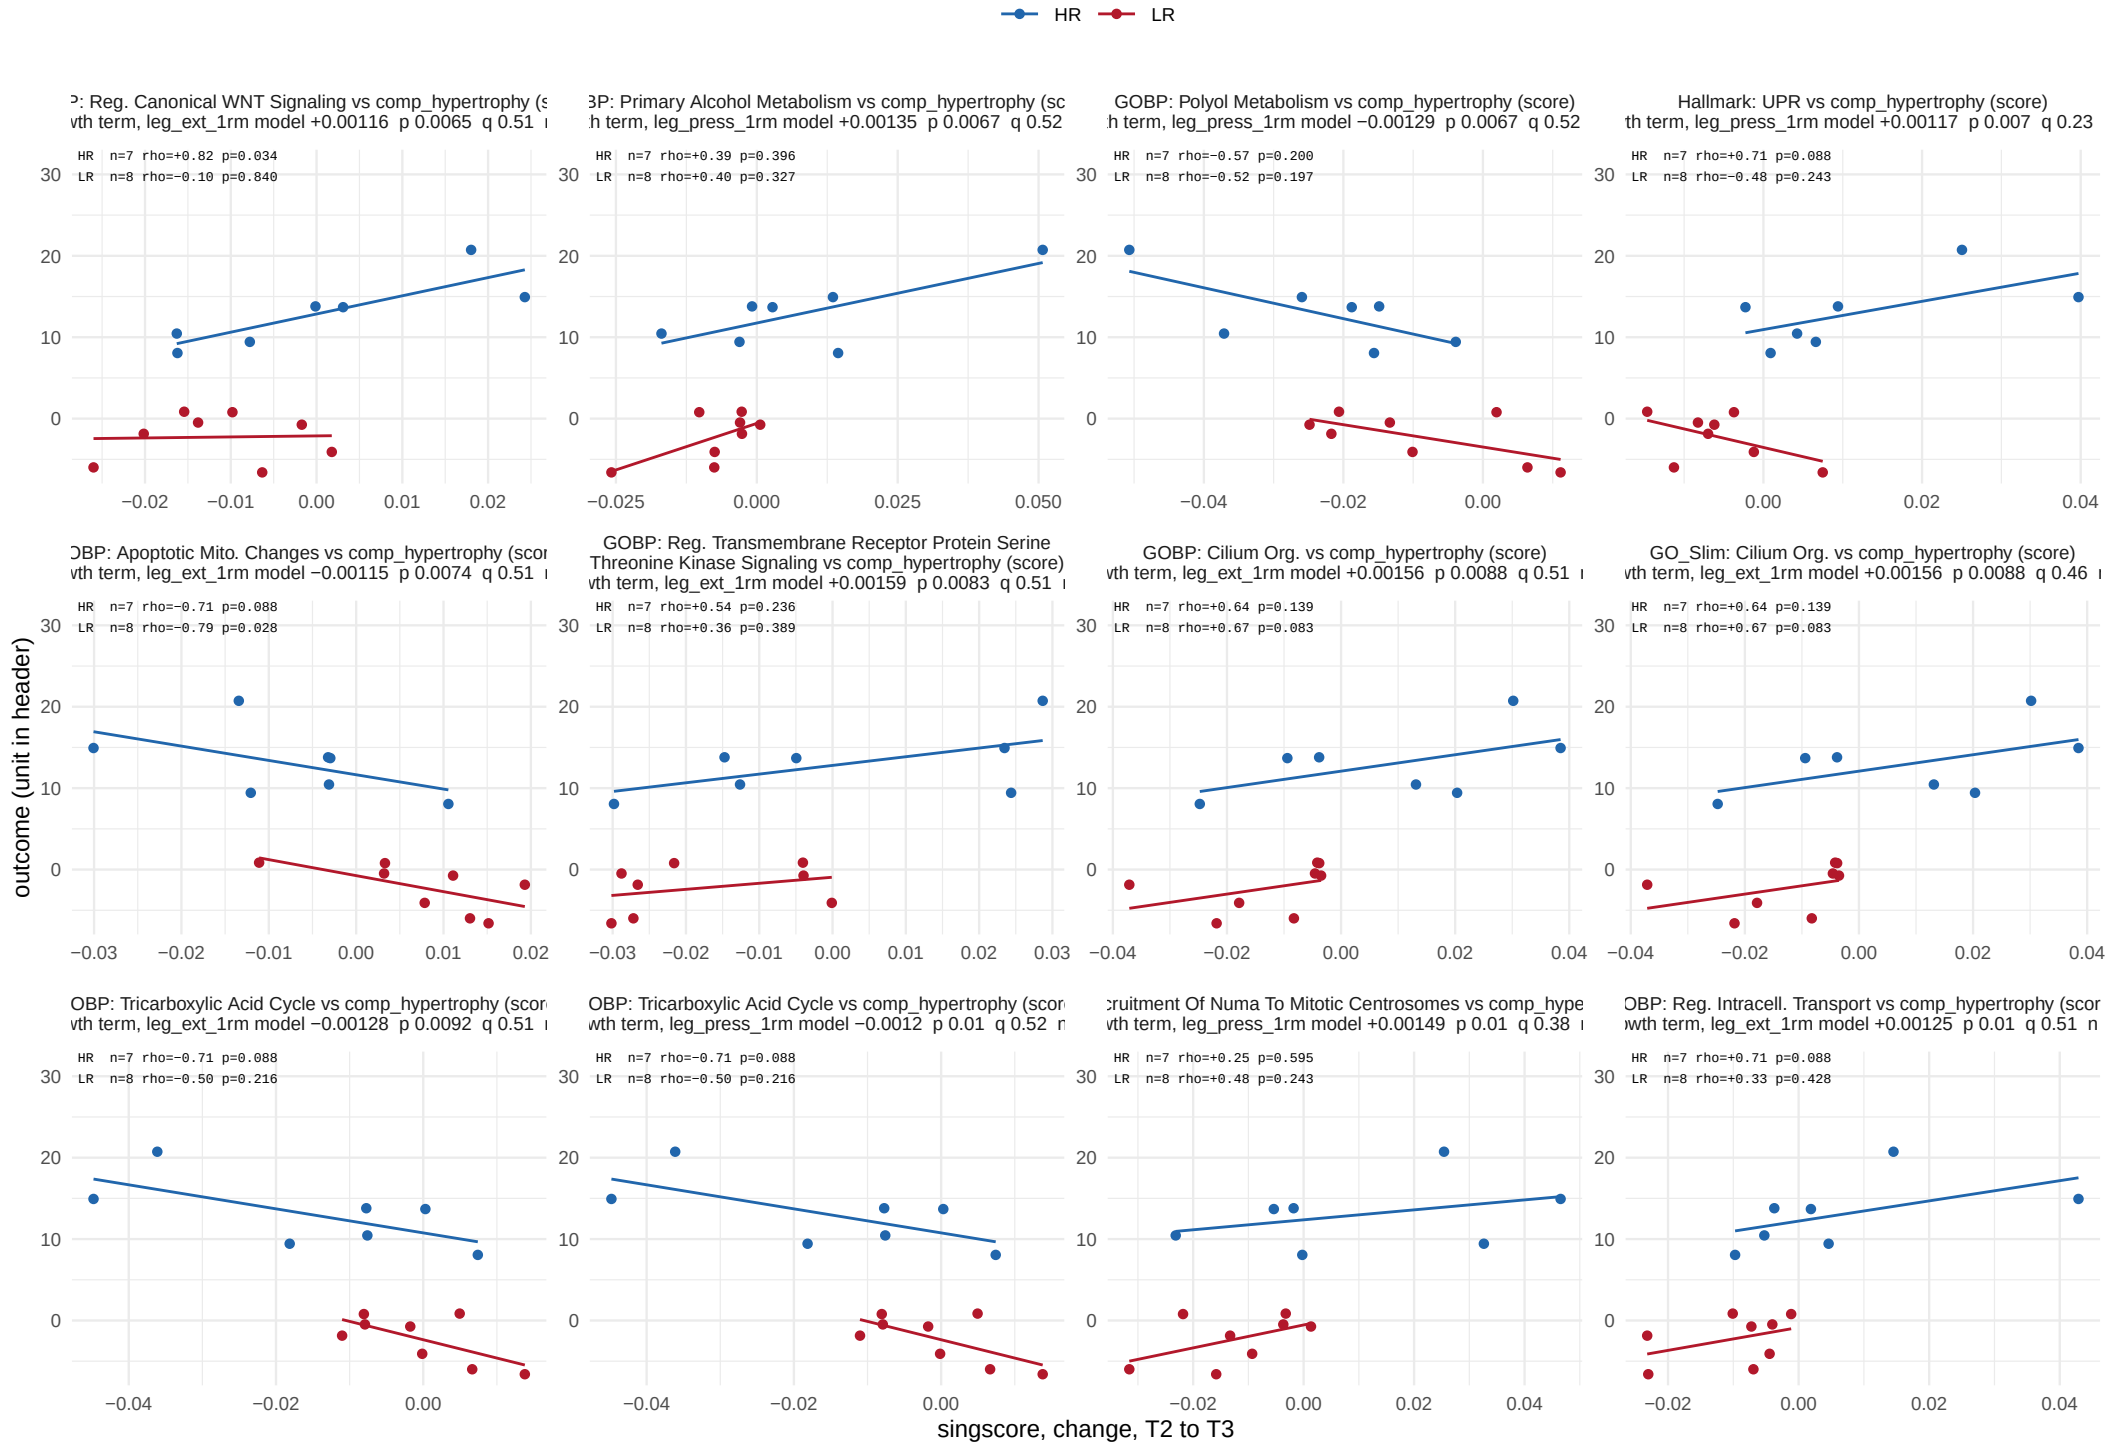

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, two_predictor.

Two predictor, acute window


242 of 5512 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 5 of 21.

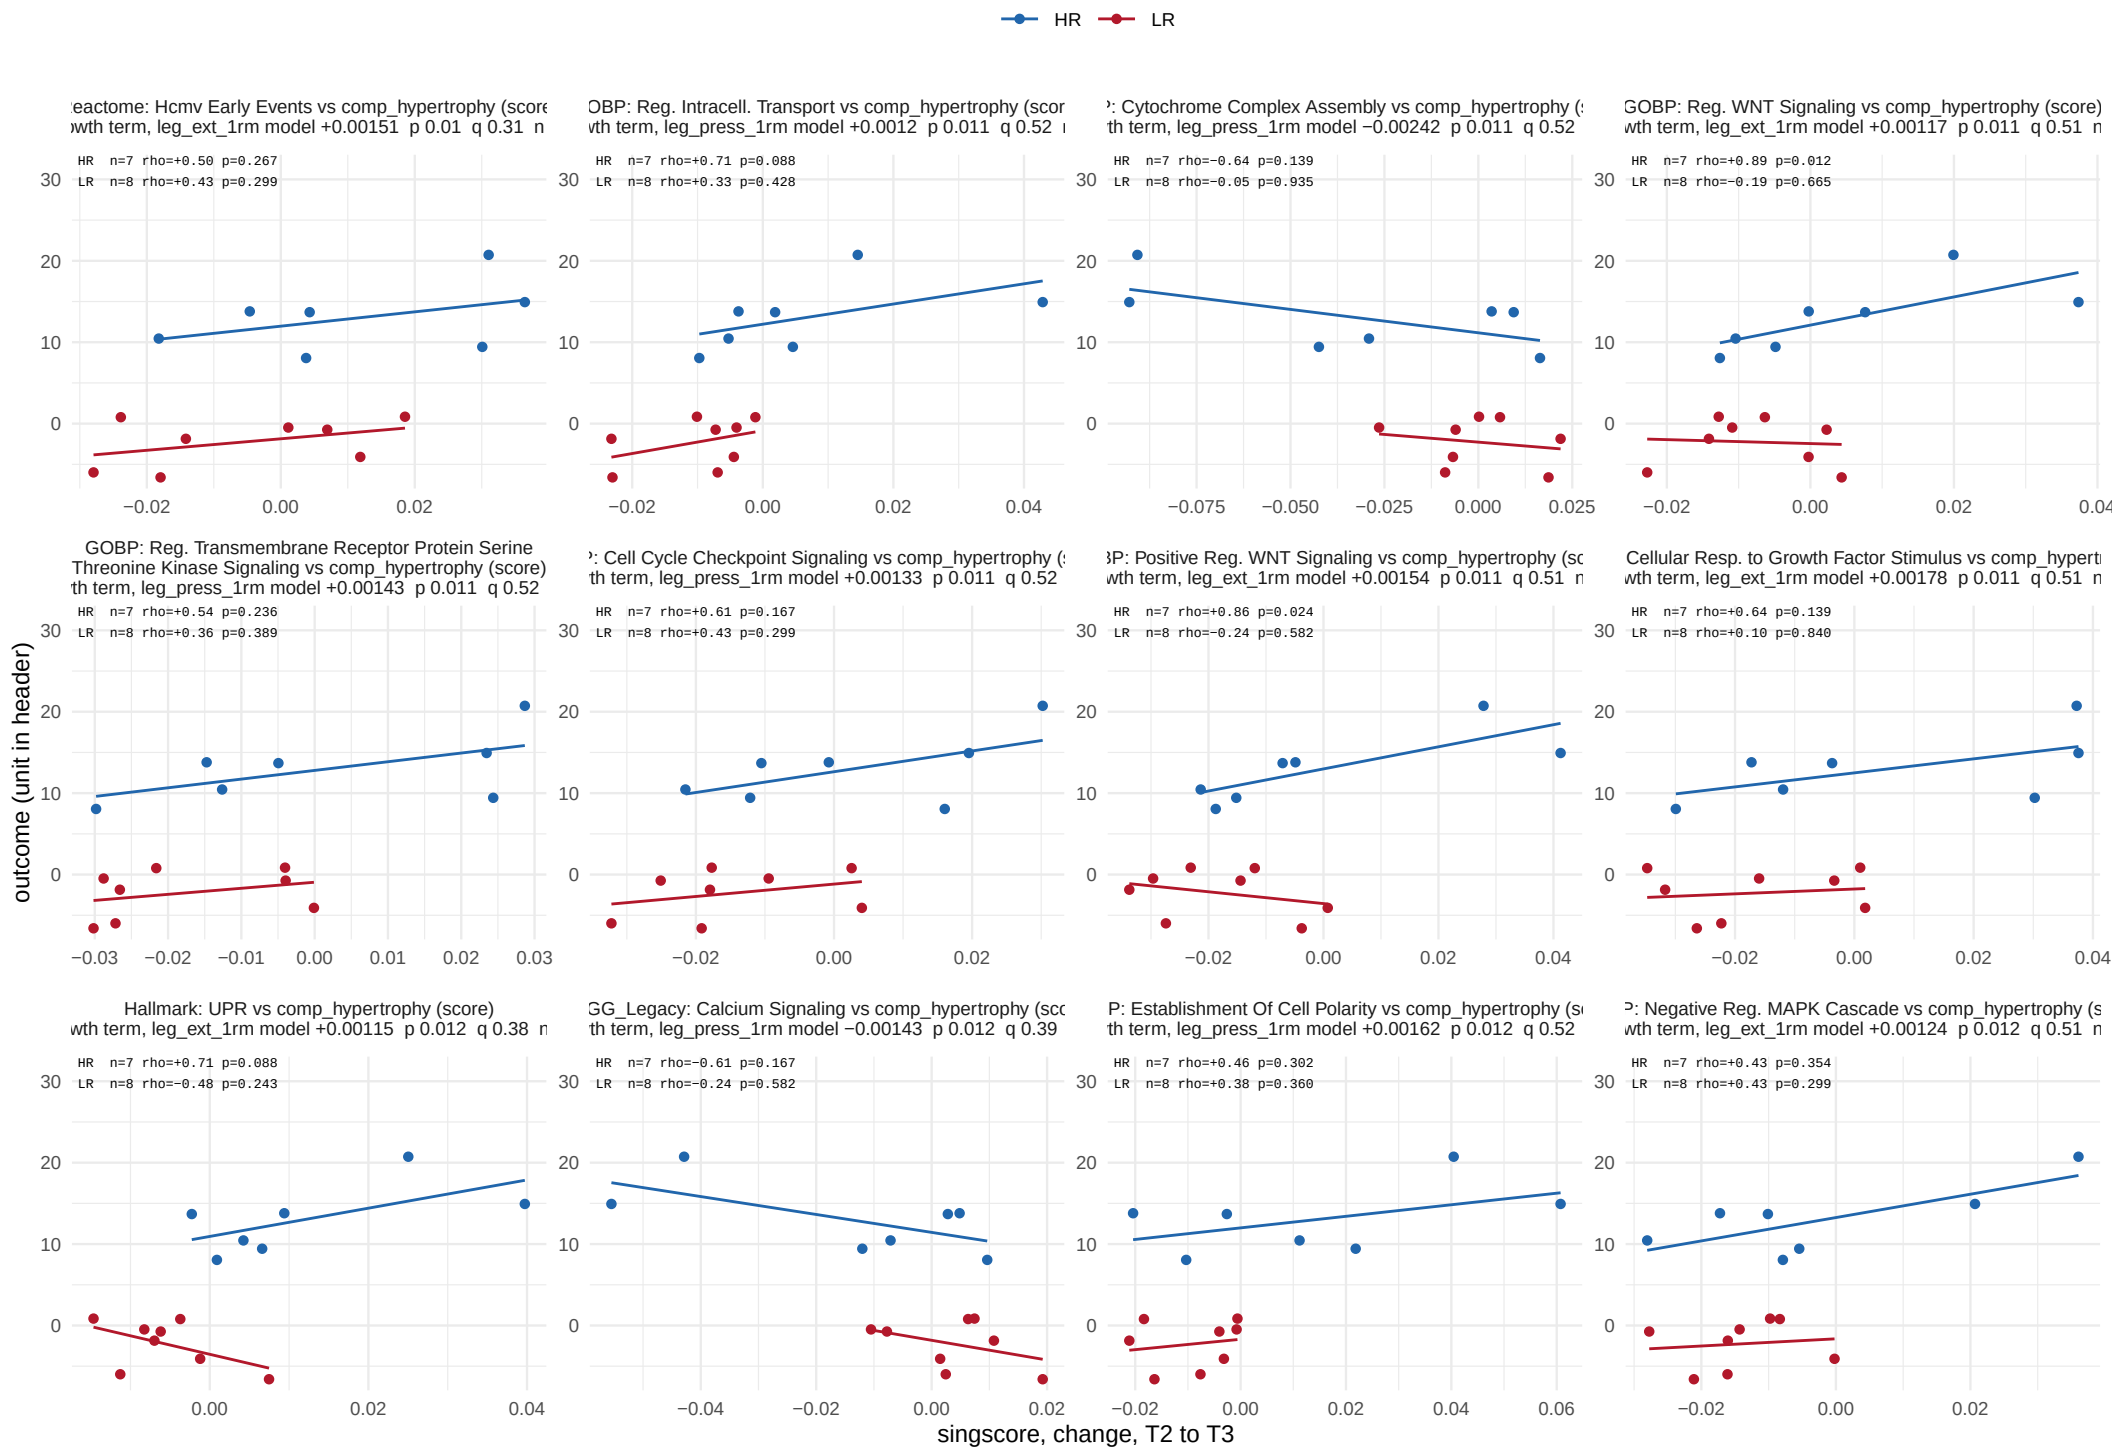

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, two_predictor.

Two predictor, acute window


242 of 5512 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 6 of 21.

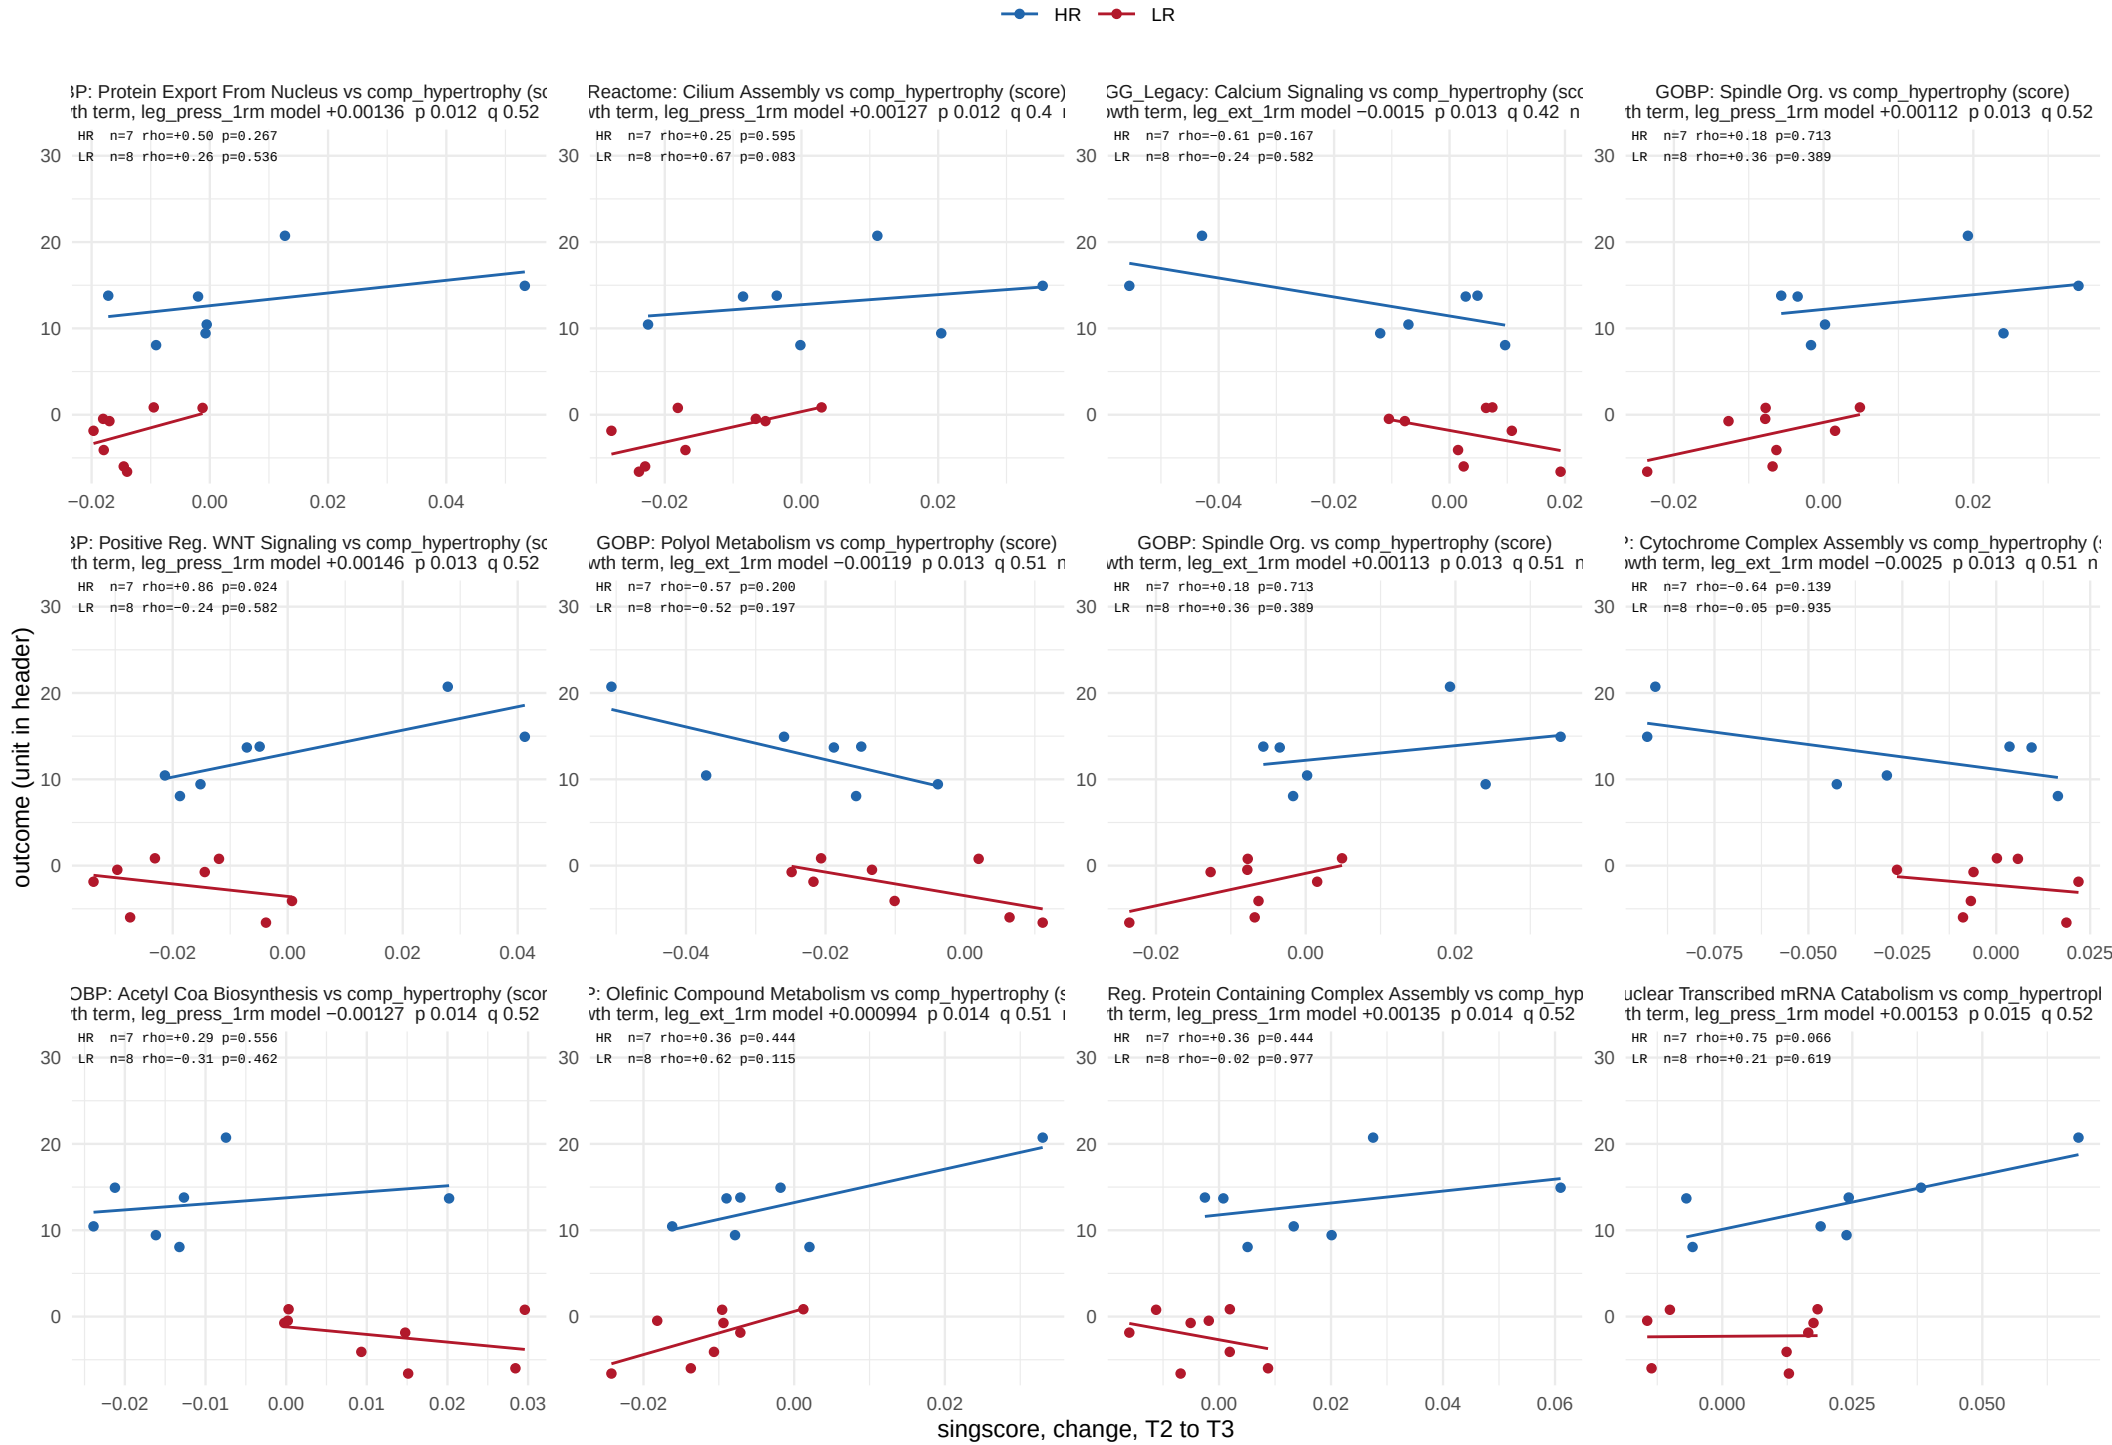

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, two_predictor.

Two predictor, acute window


242 of 5512 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 7 of 21.

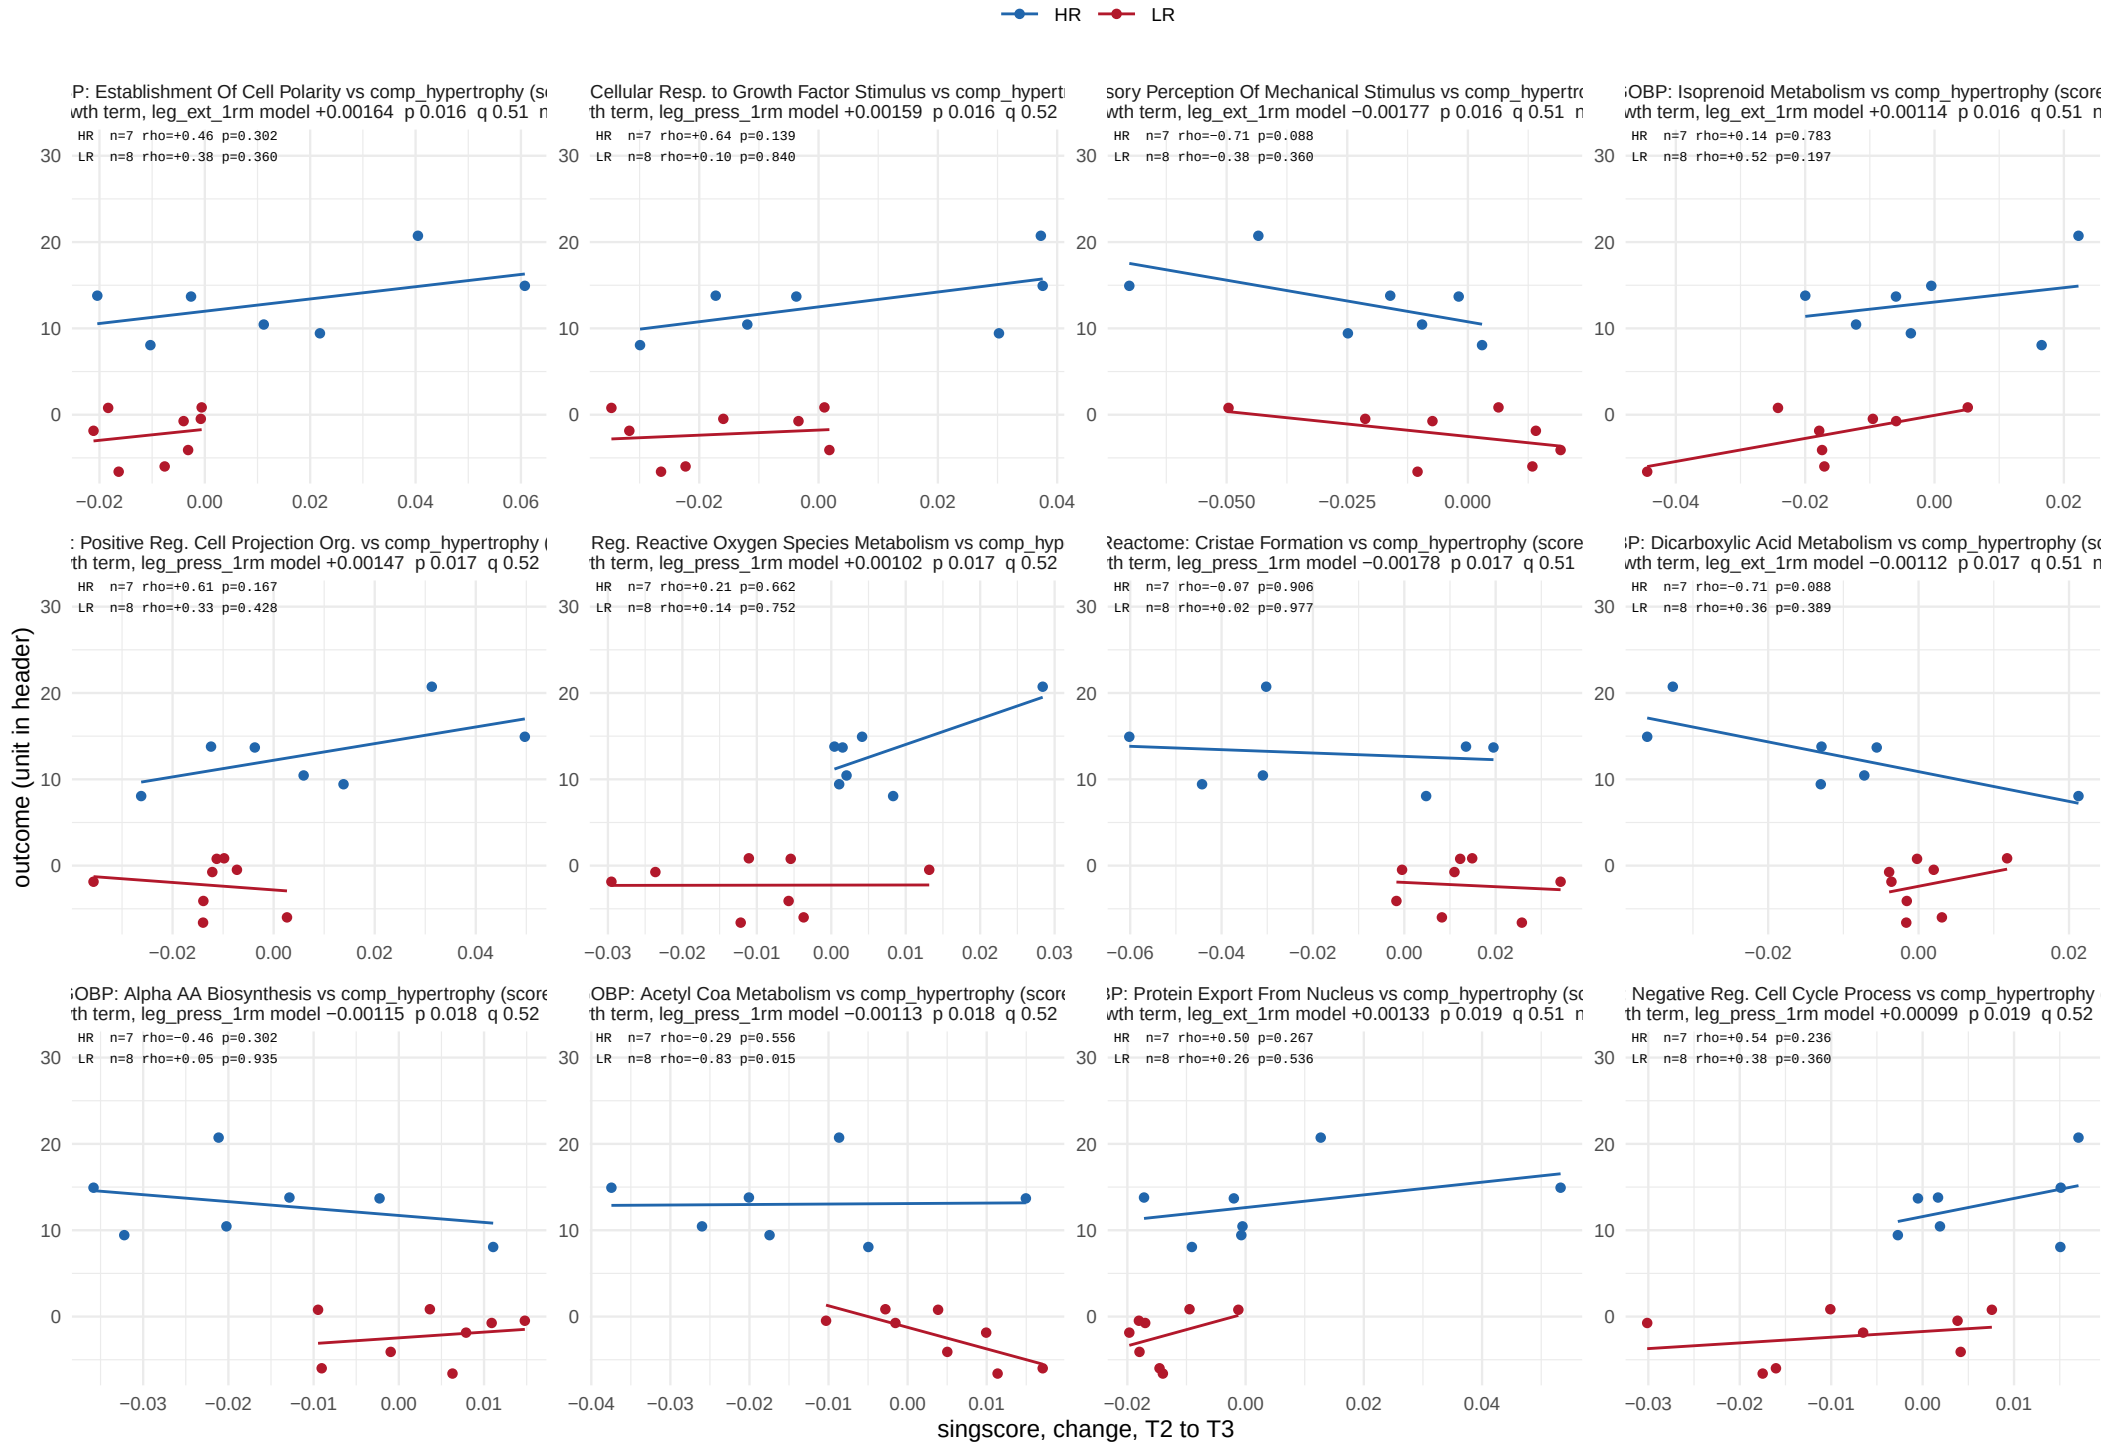

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, two_predictor.

Two predictor, acute window


242 of 5512 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 8 of 21.

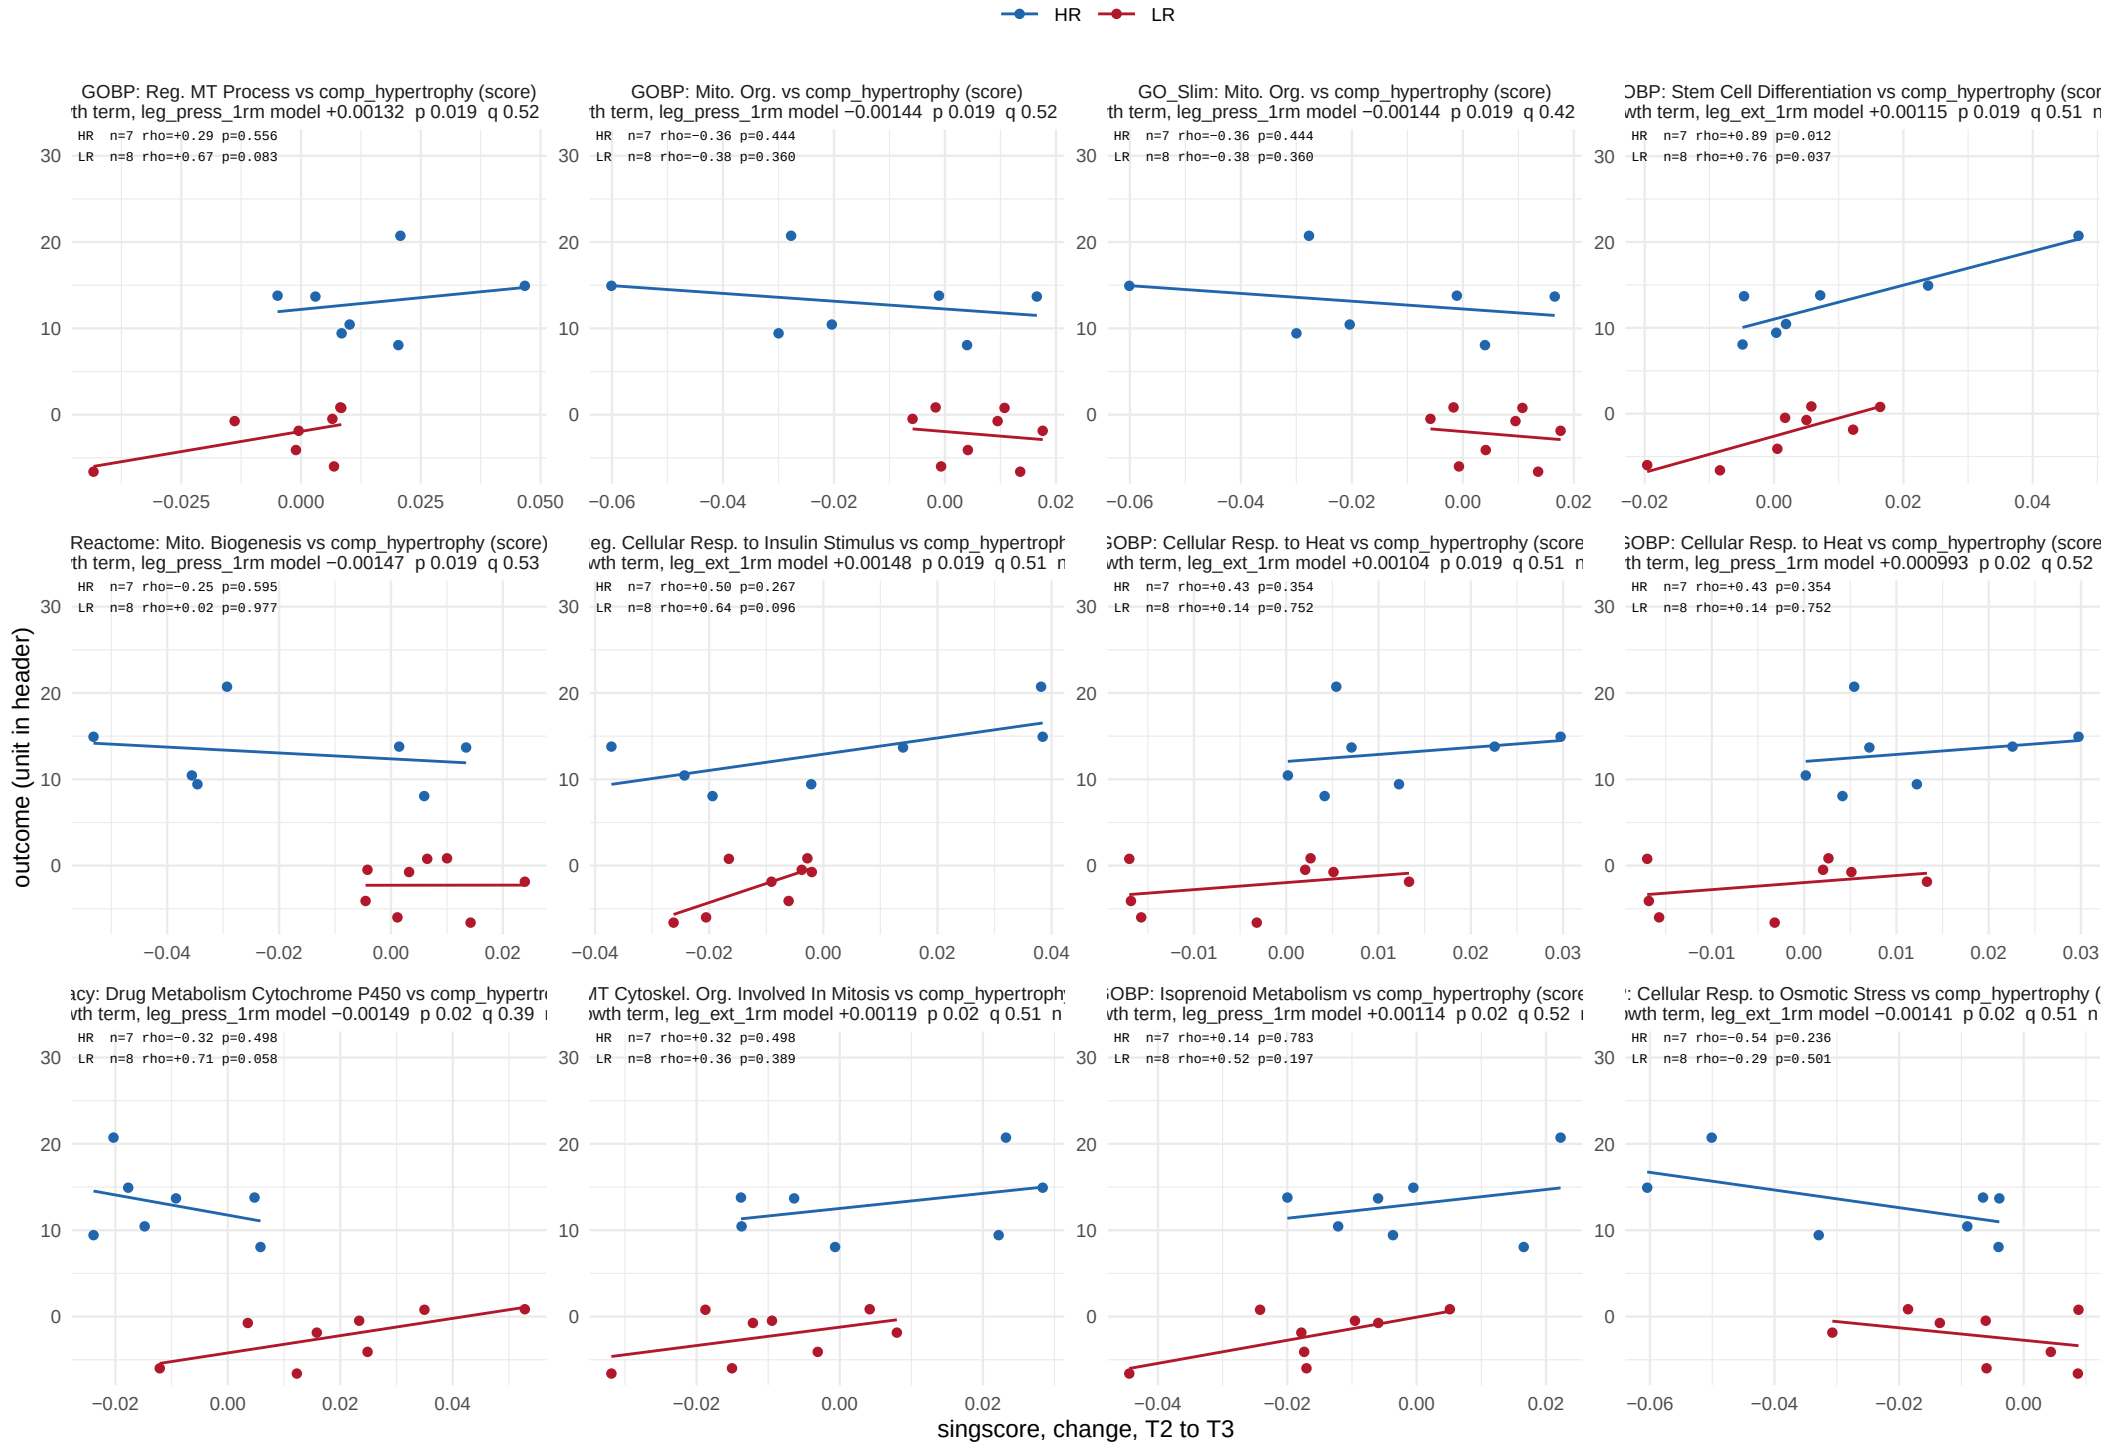

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, two_predictor.

Two predictor, acute window


242 of 5512 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 9 of 21.

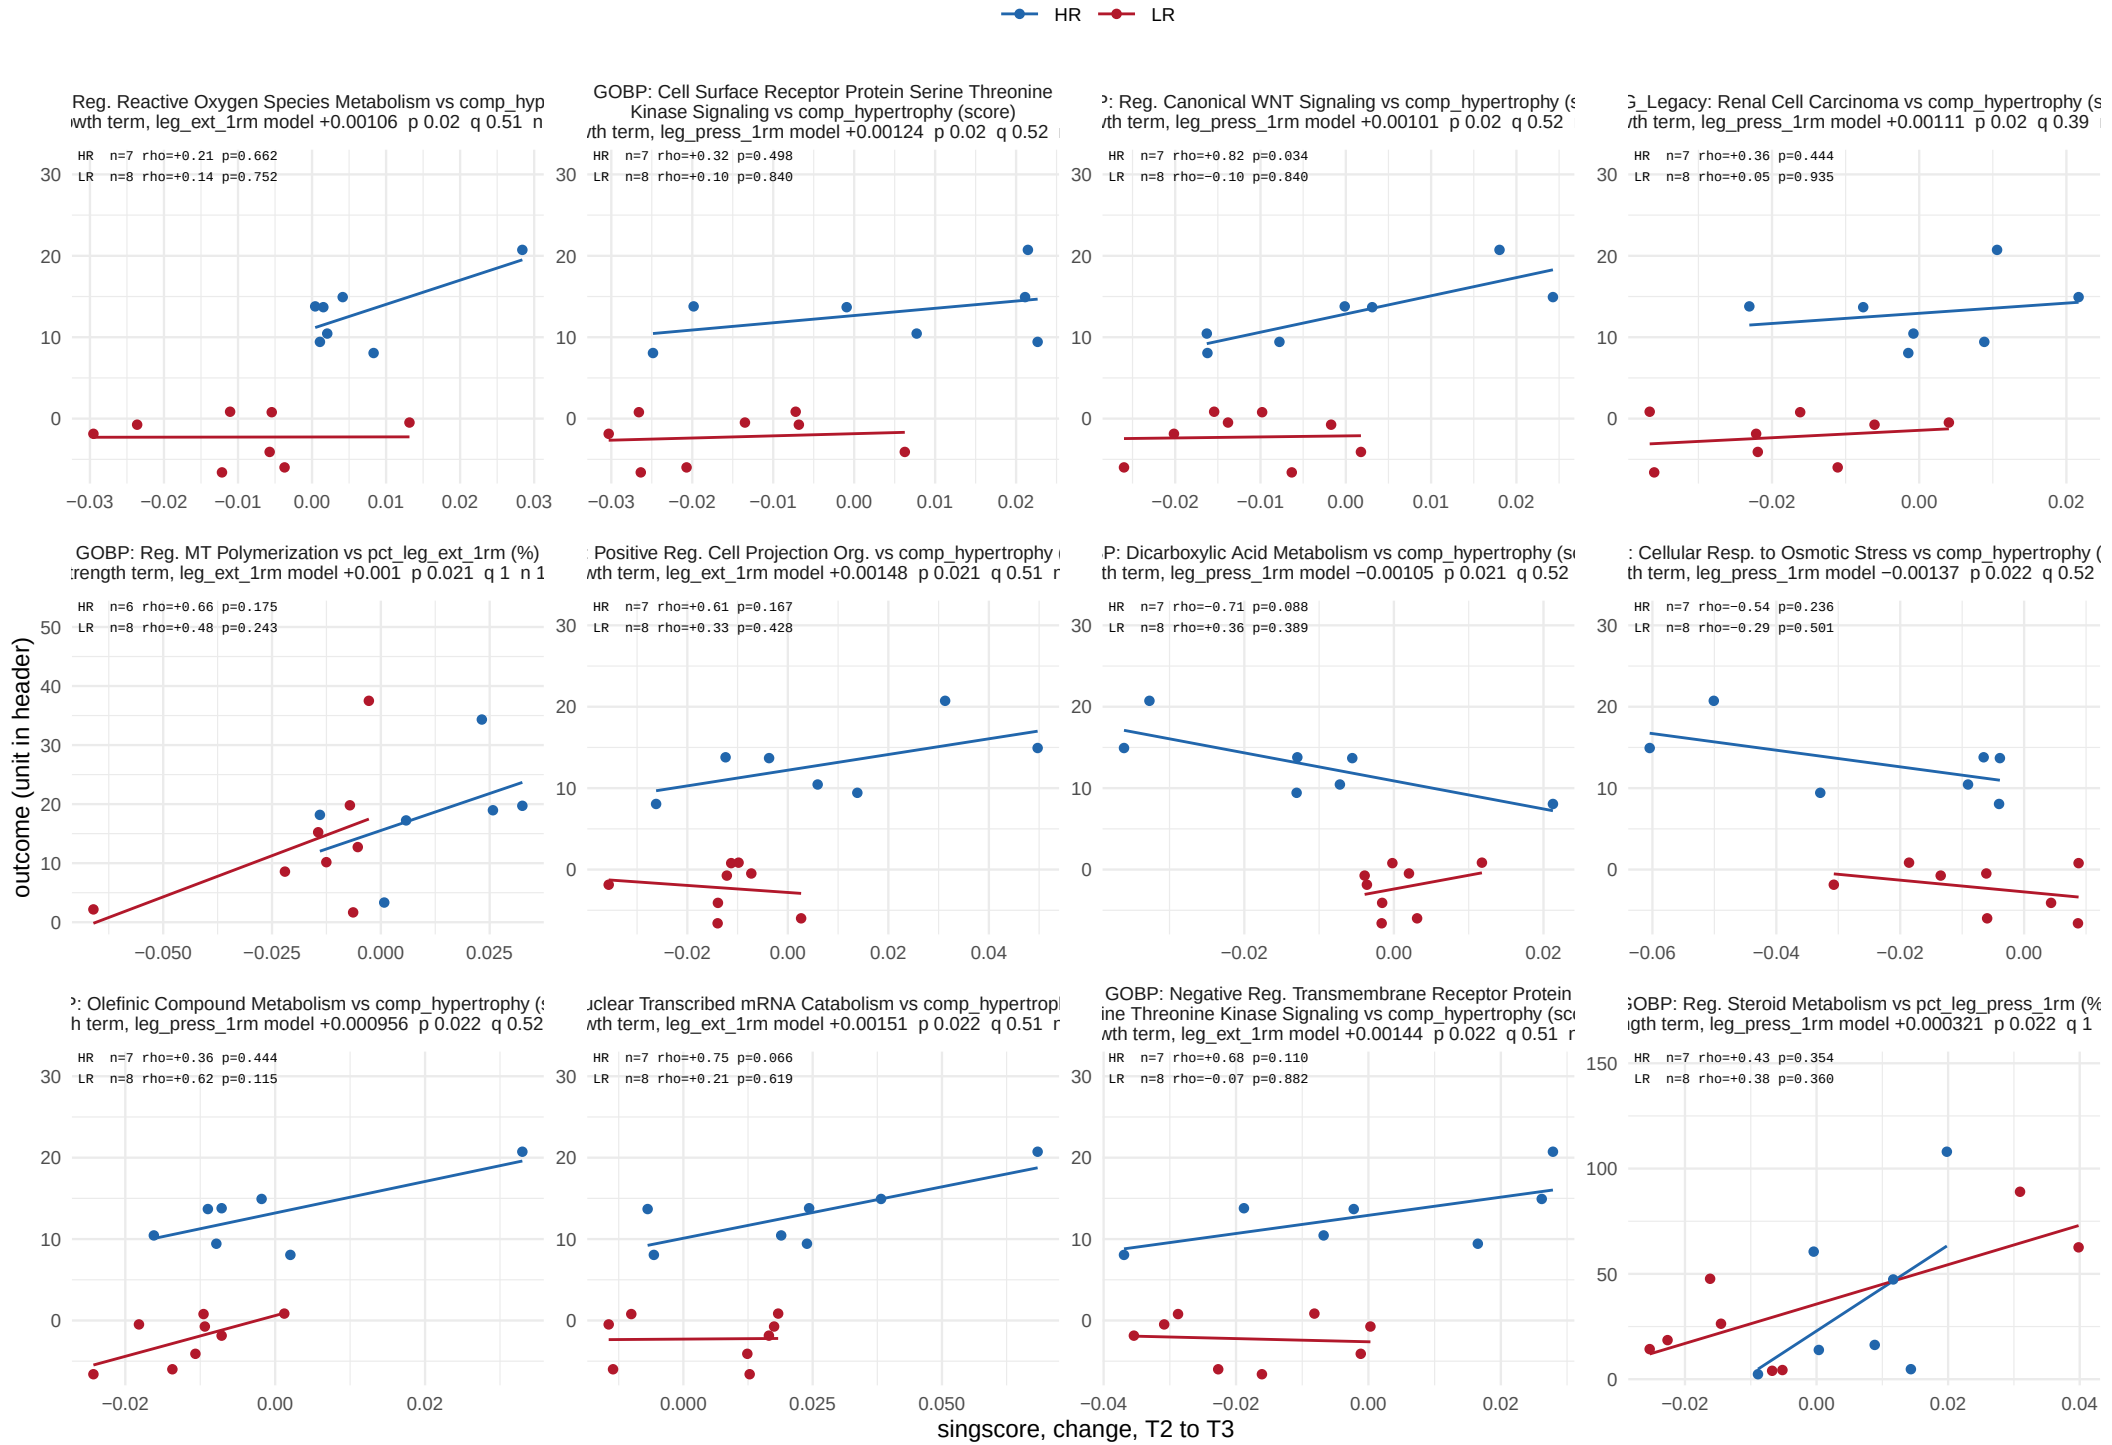

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, two_predictor.

Two predictor, acute window


242 of 5512 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 10 of 21.

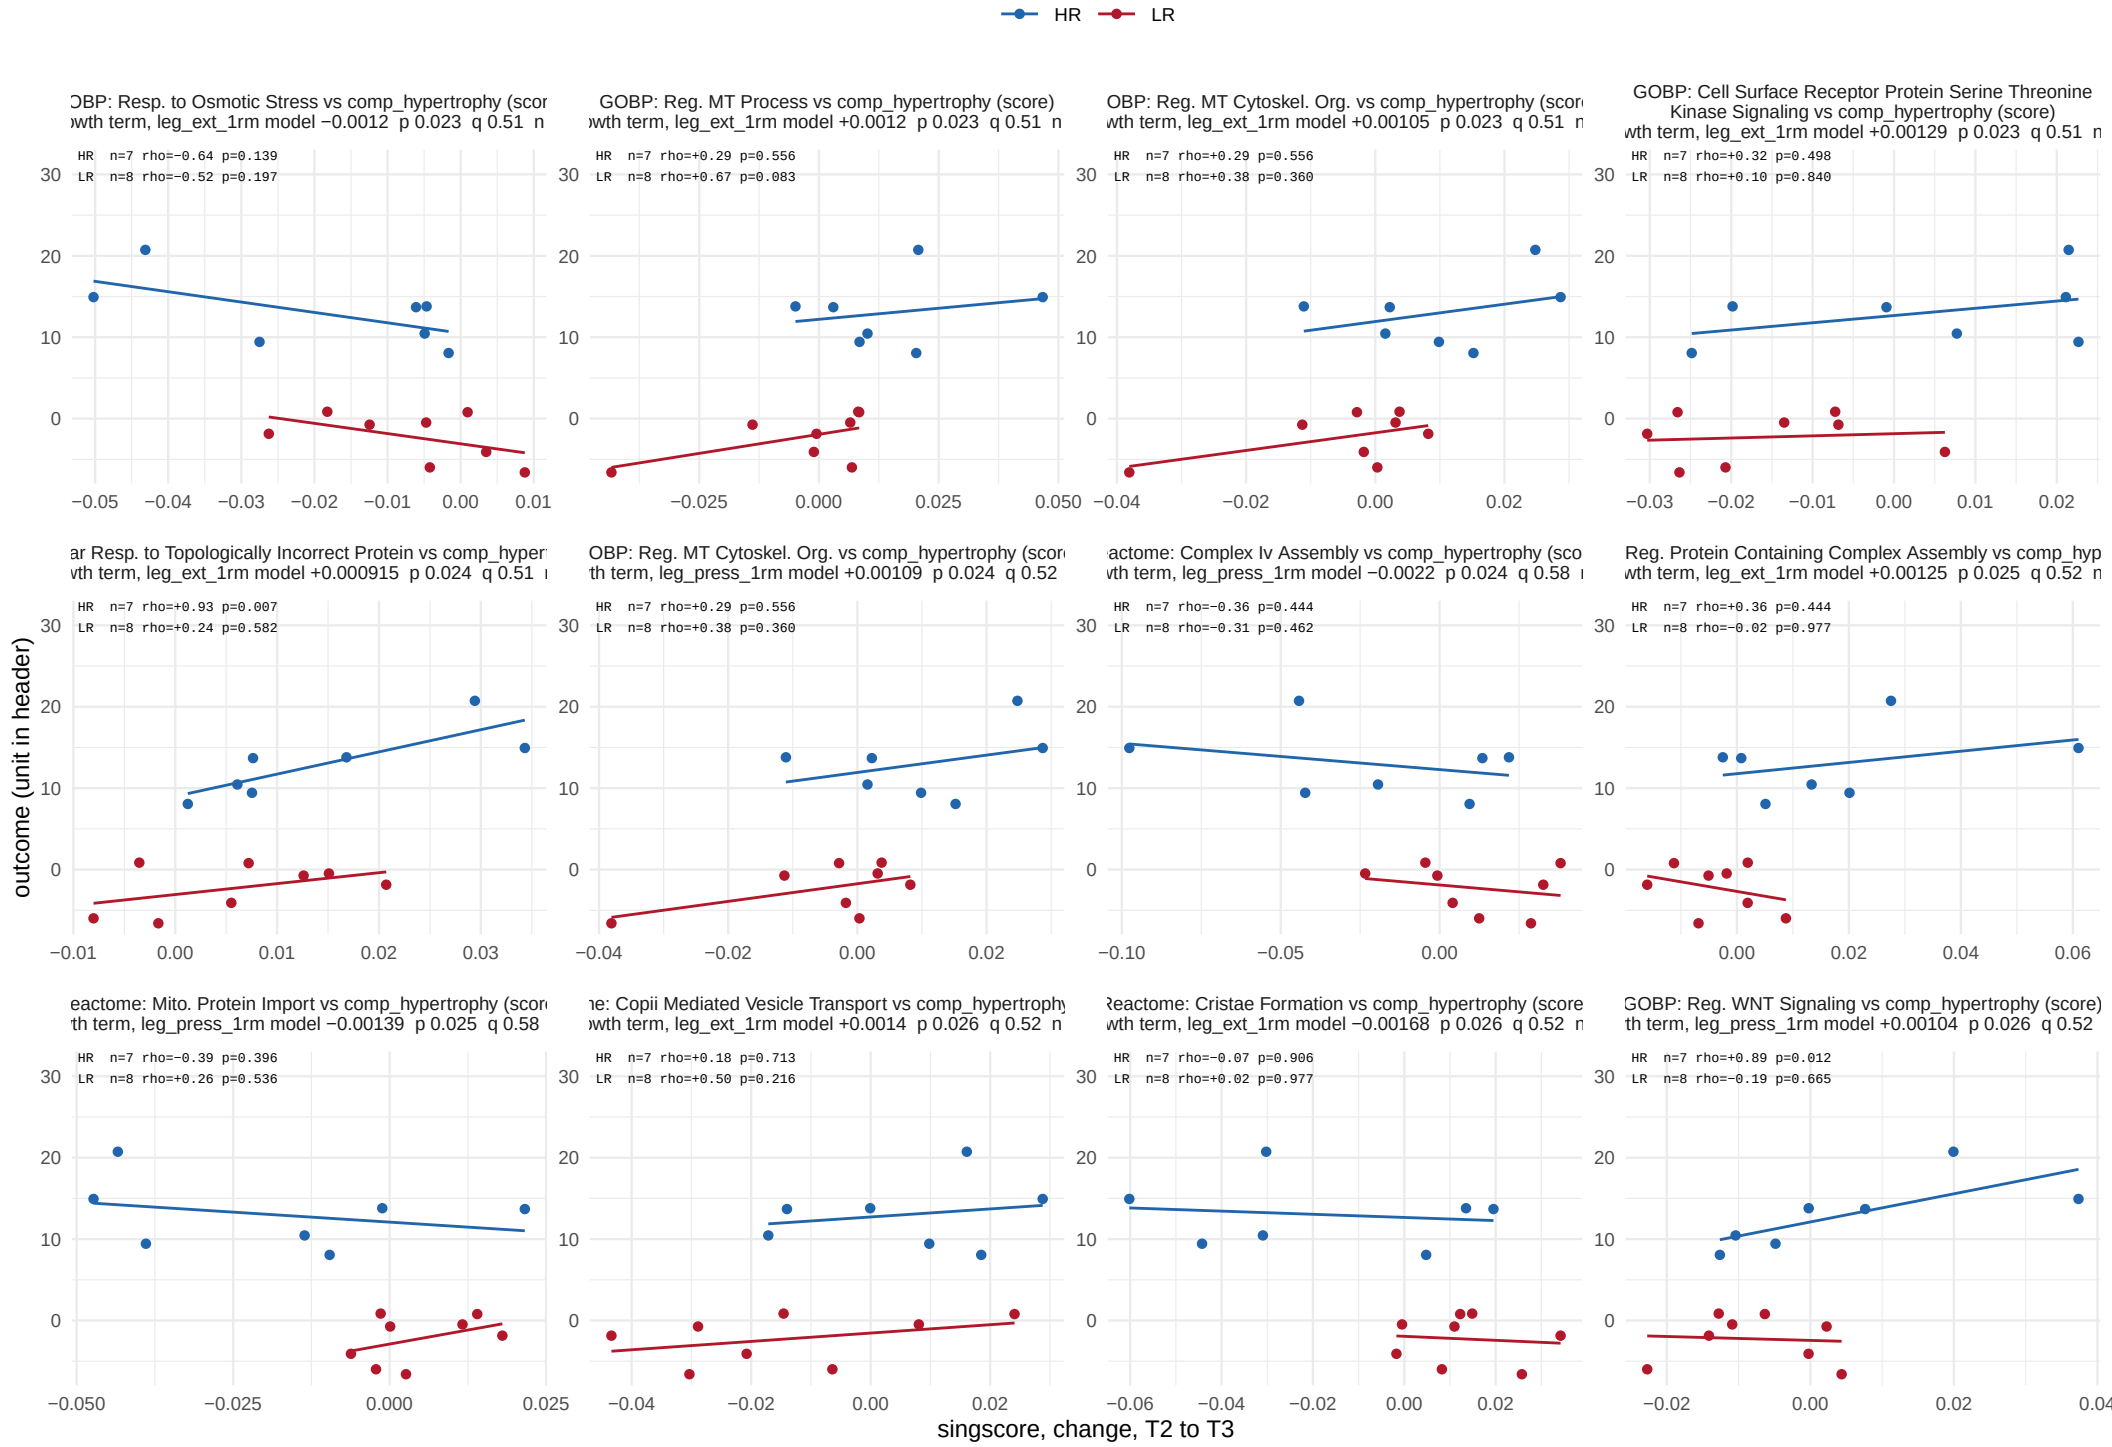

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, two_predictor.

Two predictor, acute window


242 of 5512 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 11 of 21.

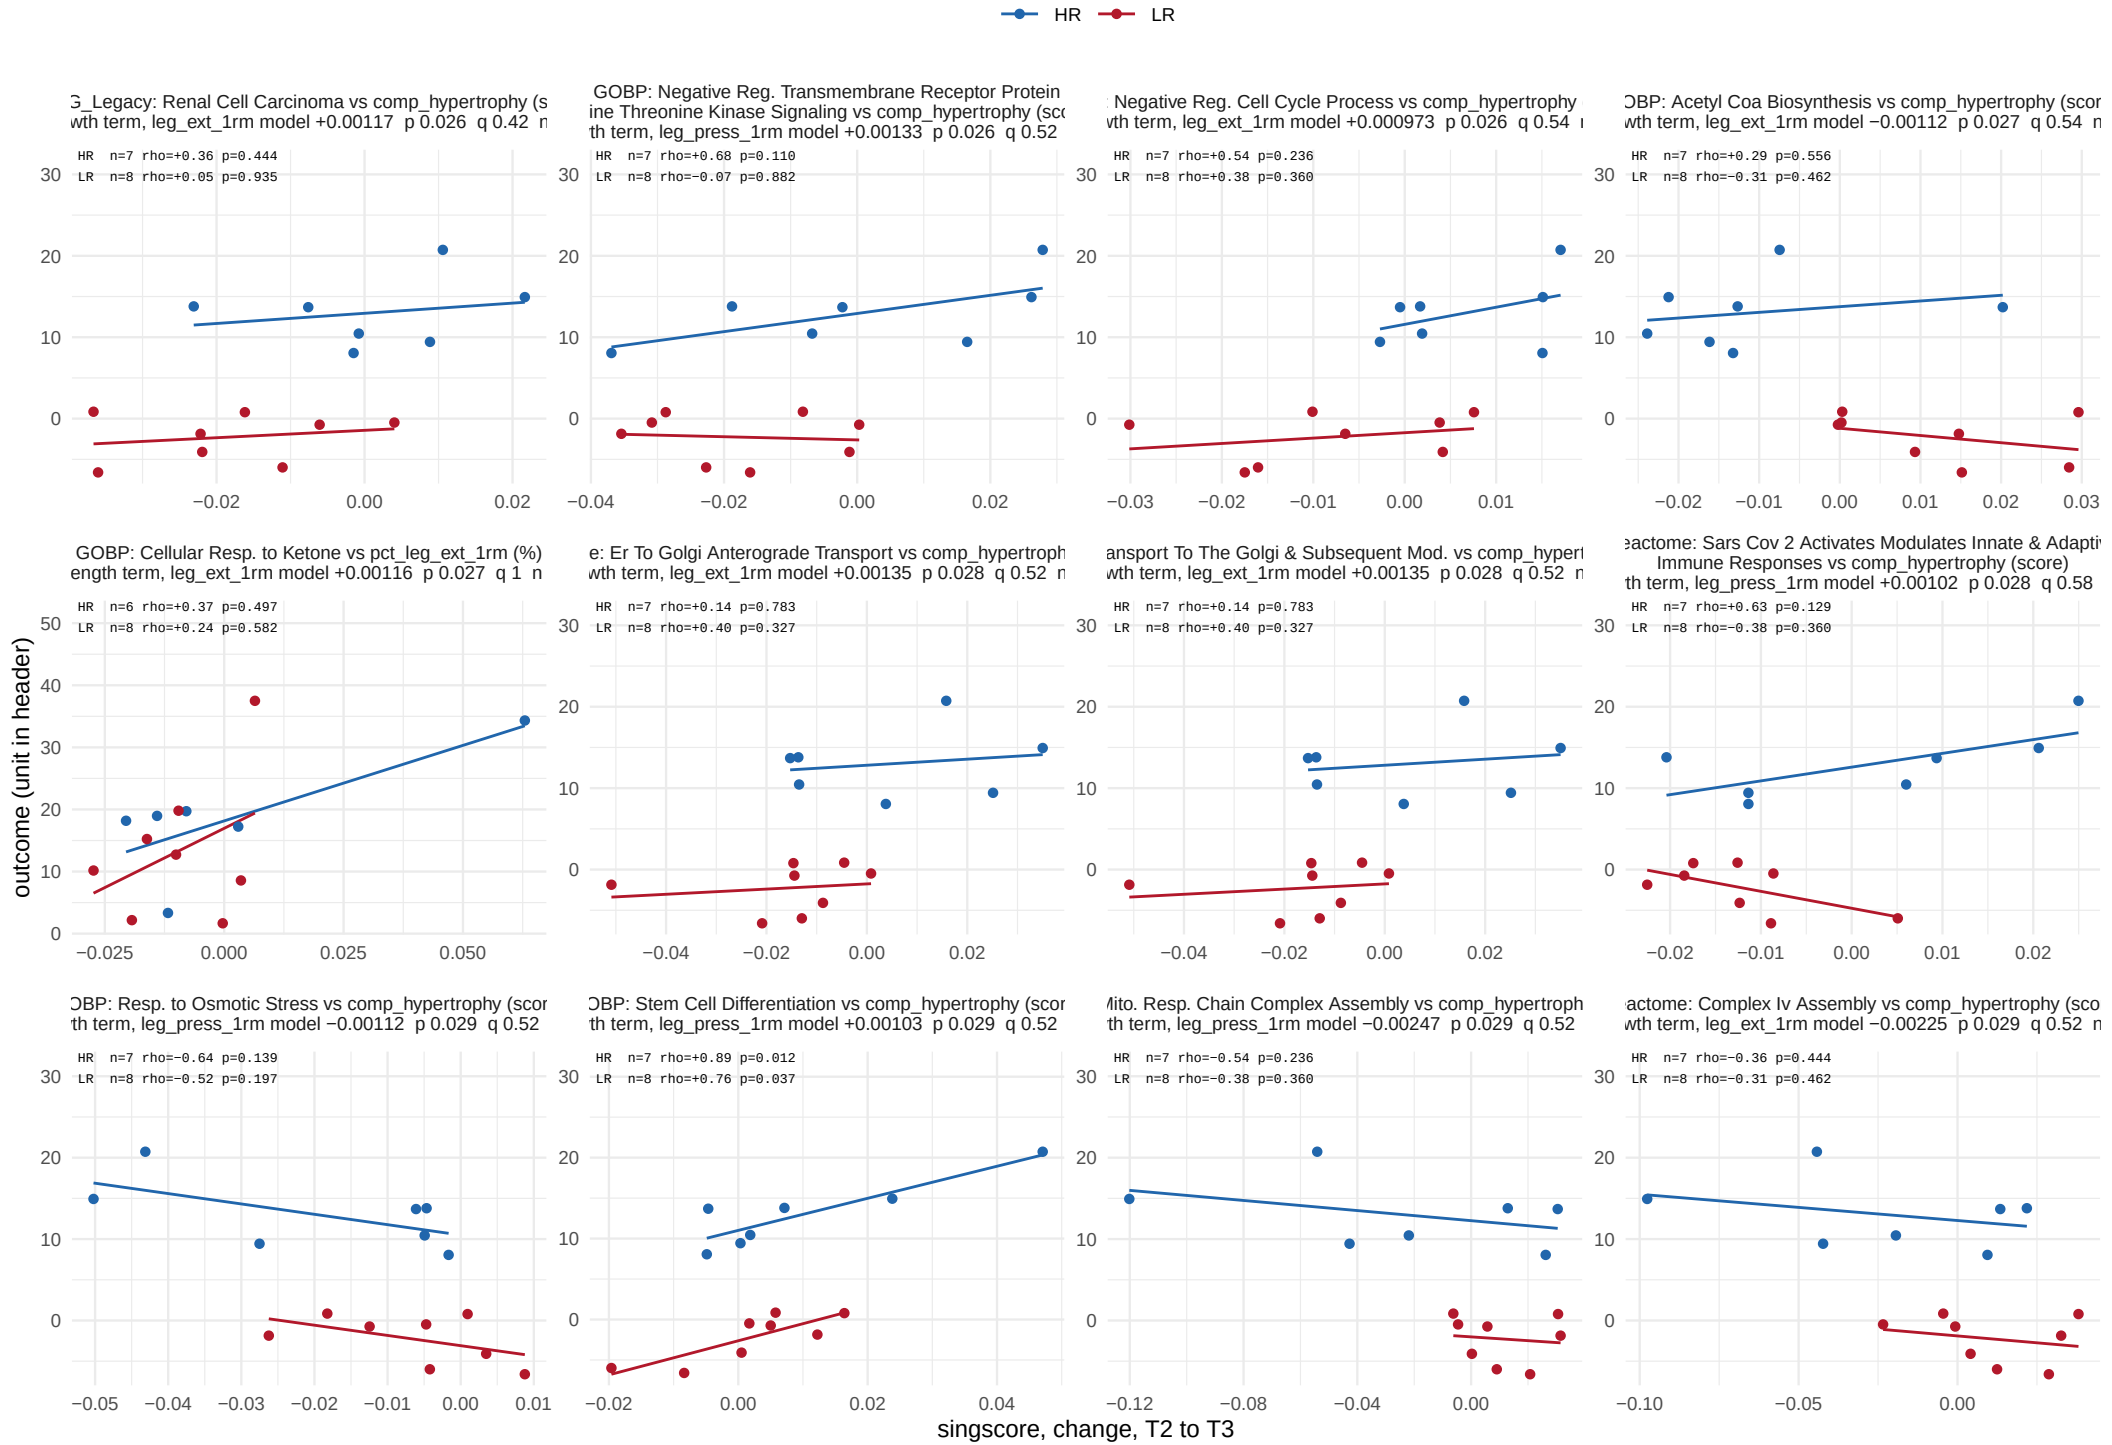

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, two_predictor.

Two predictor, acute window


242 of 5512 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 12 of 21.

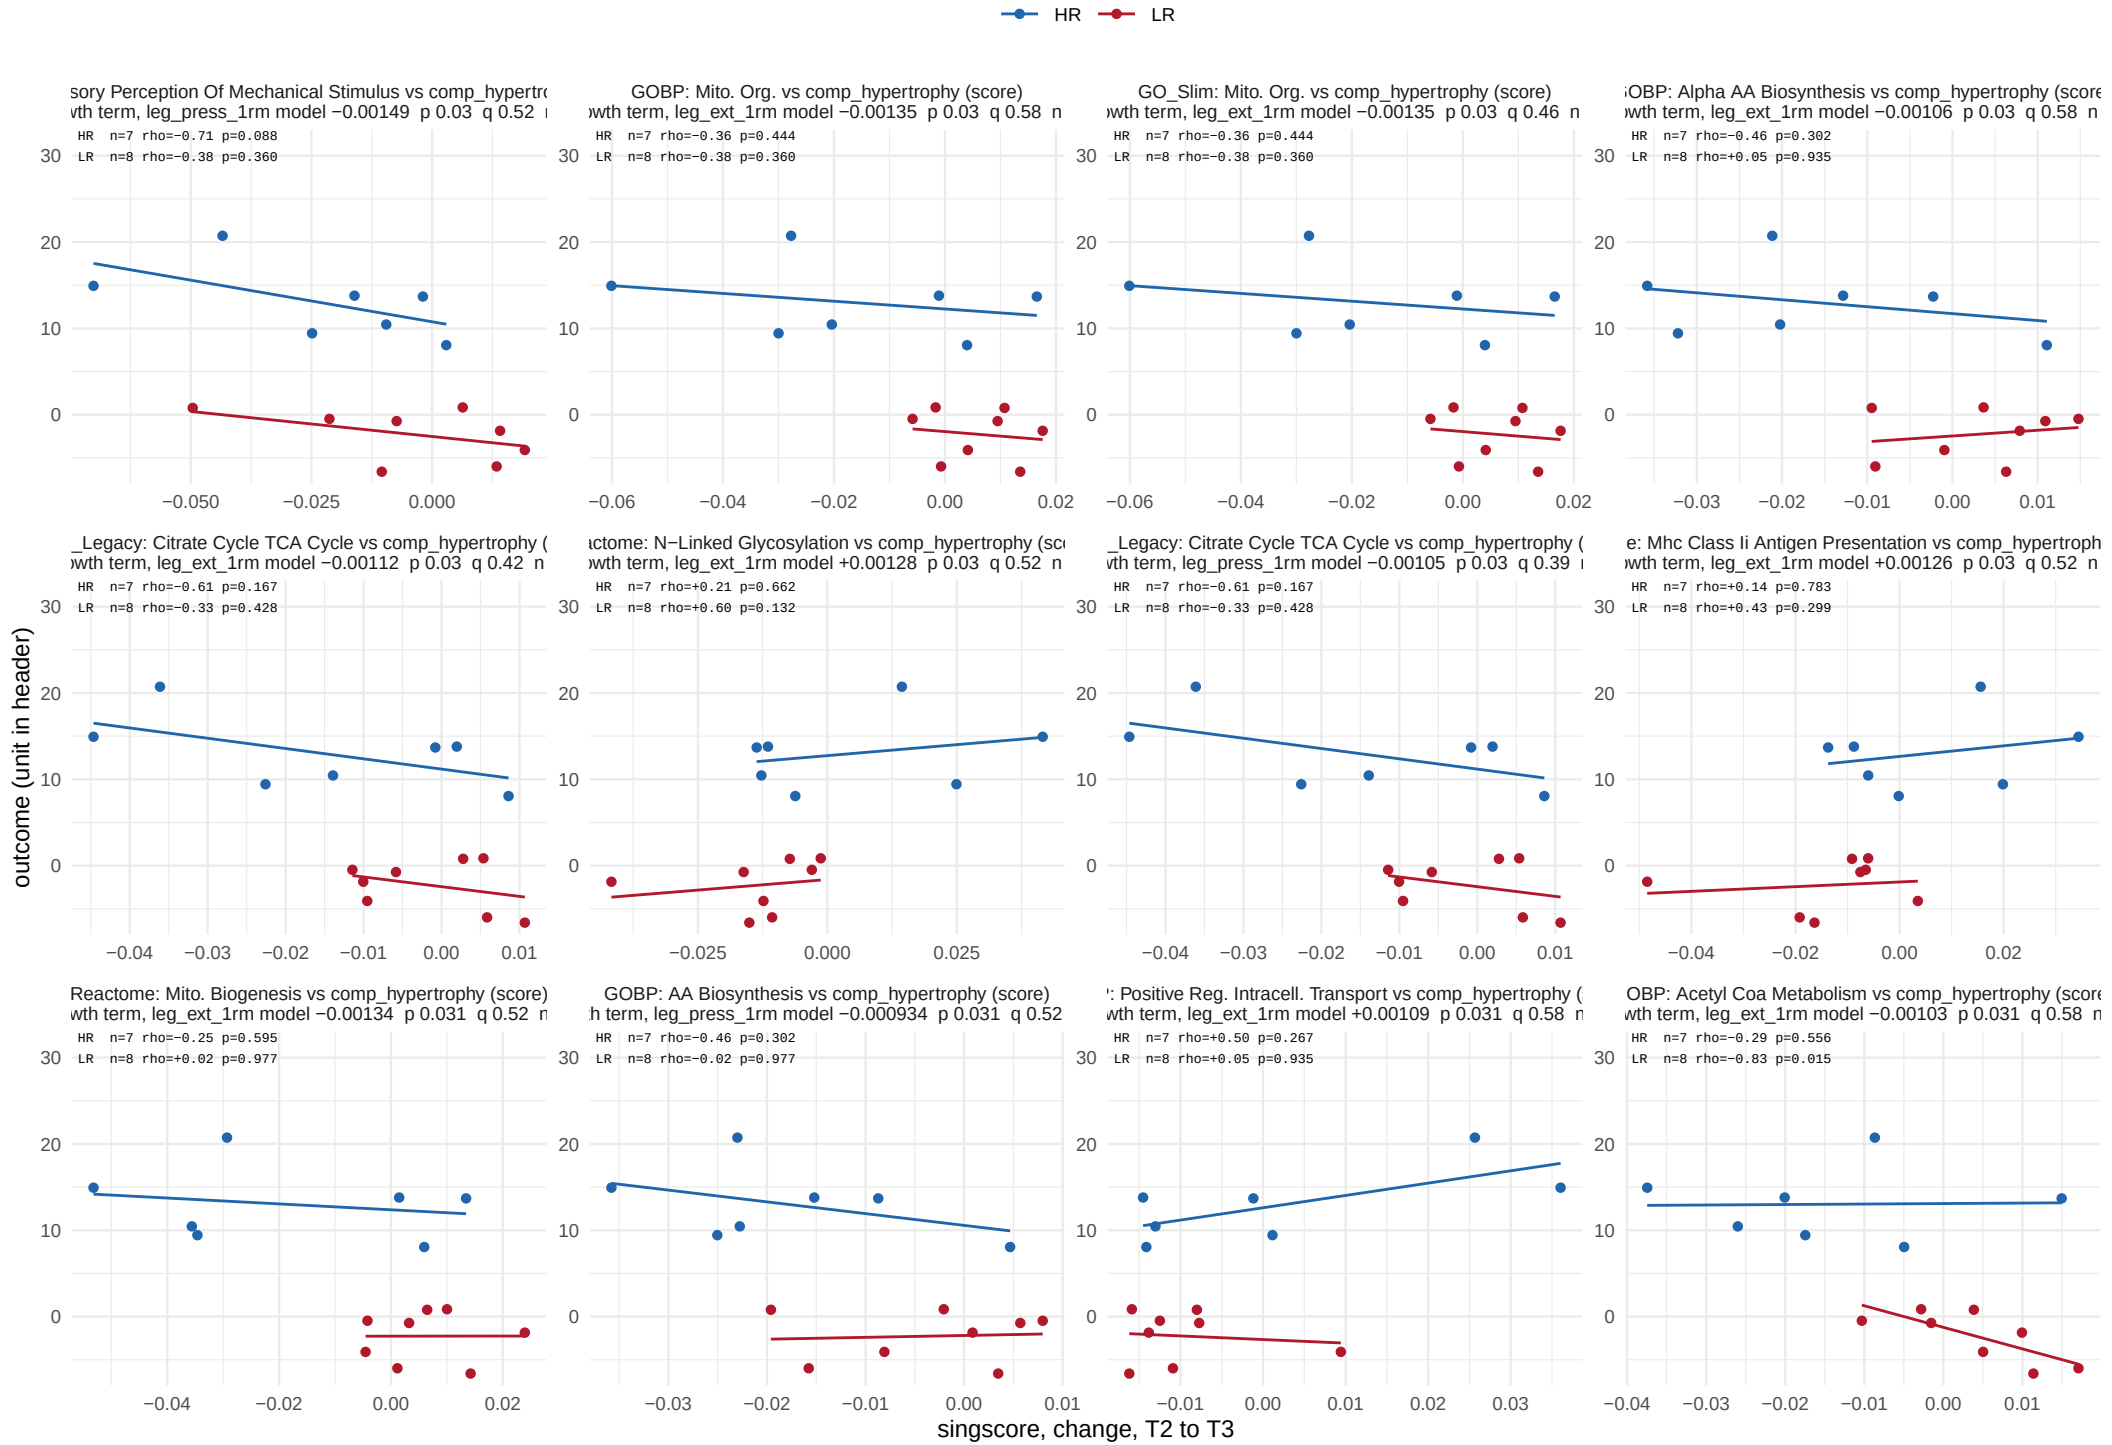

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, two_predictor.

Two predictor, acute window


242 of 5512 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 13 of 21.

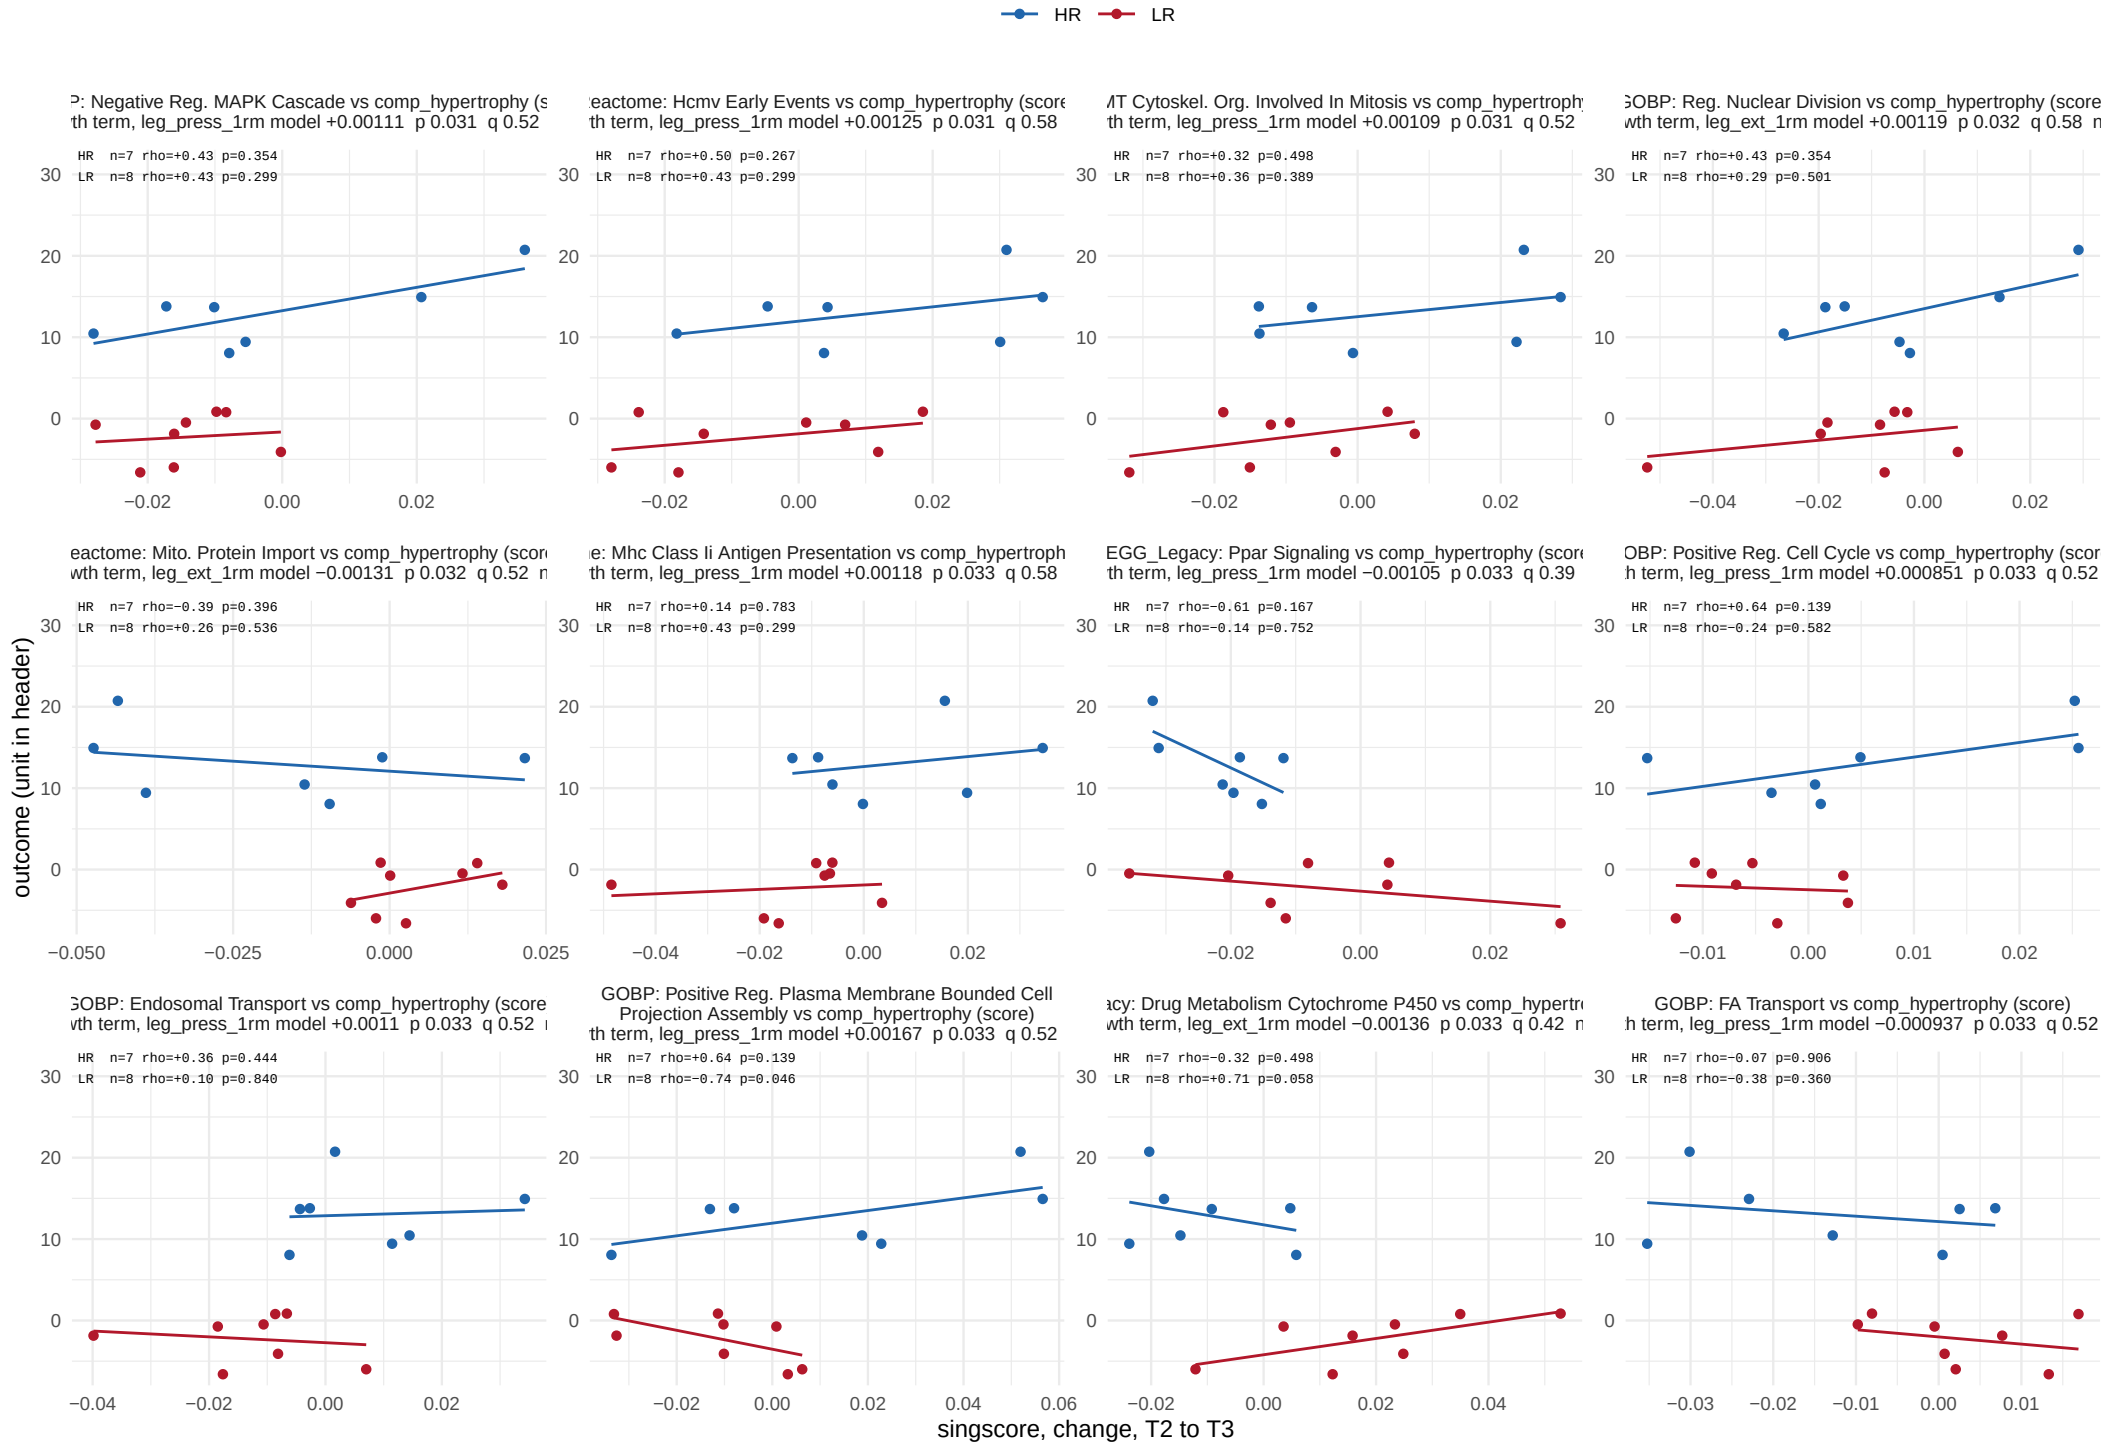

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, two_predictor.

Two predictor, acute window


242 of 5512 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 14 of 21.

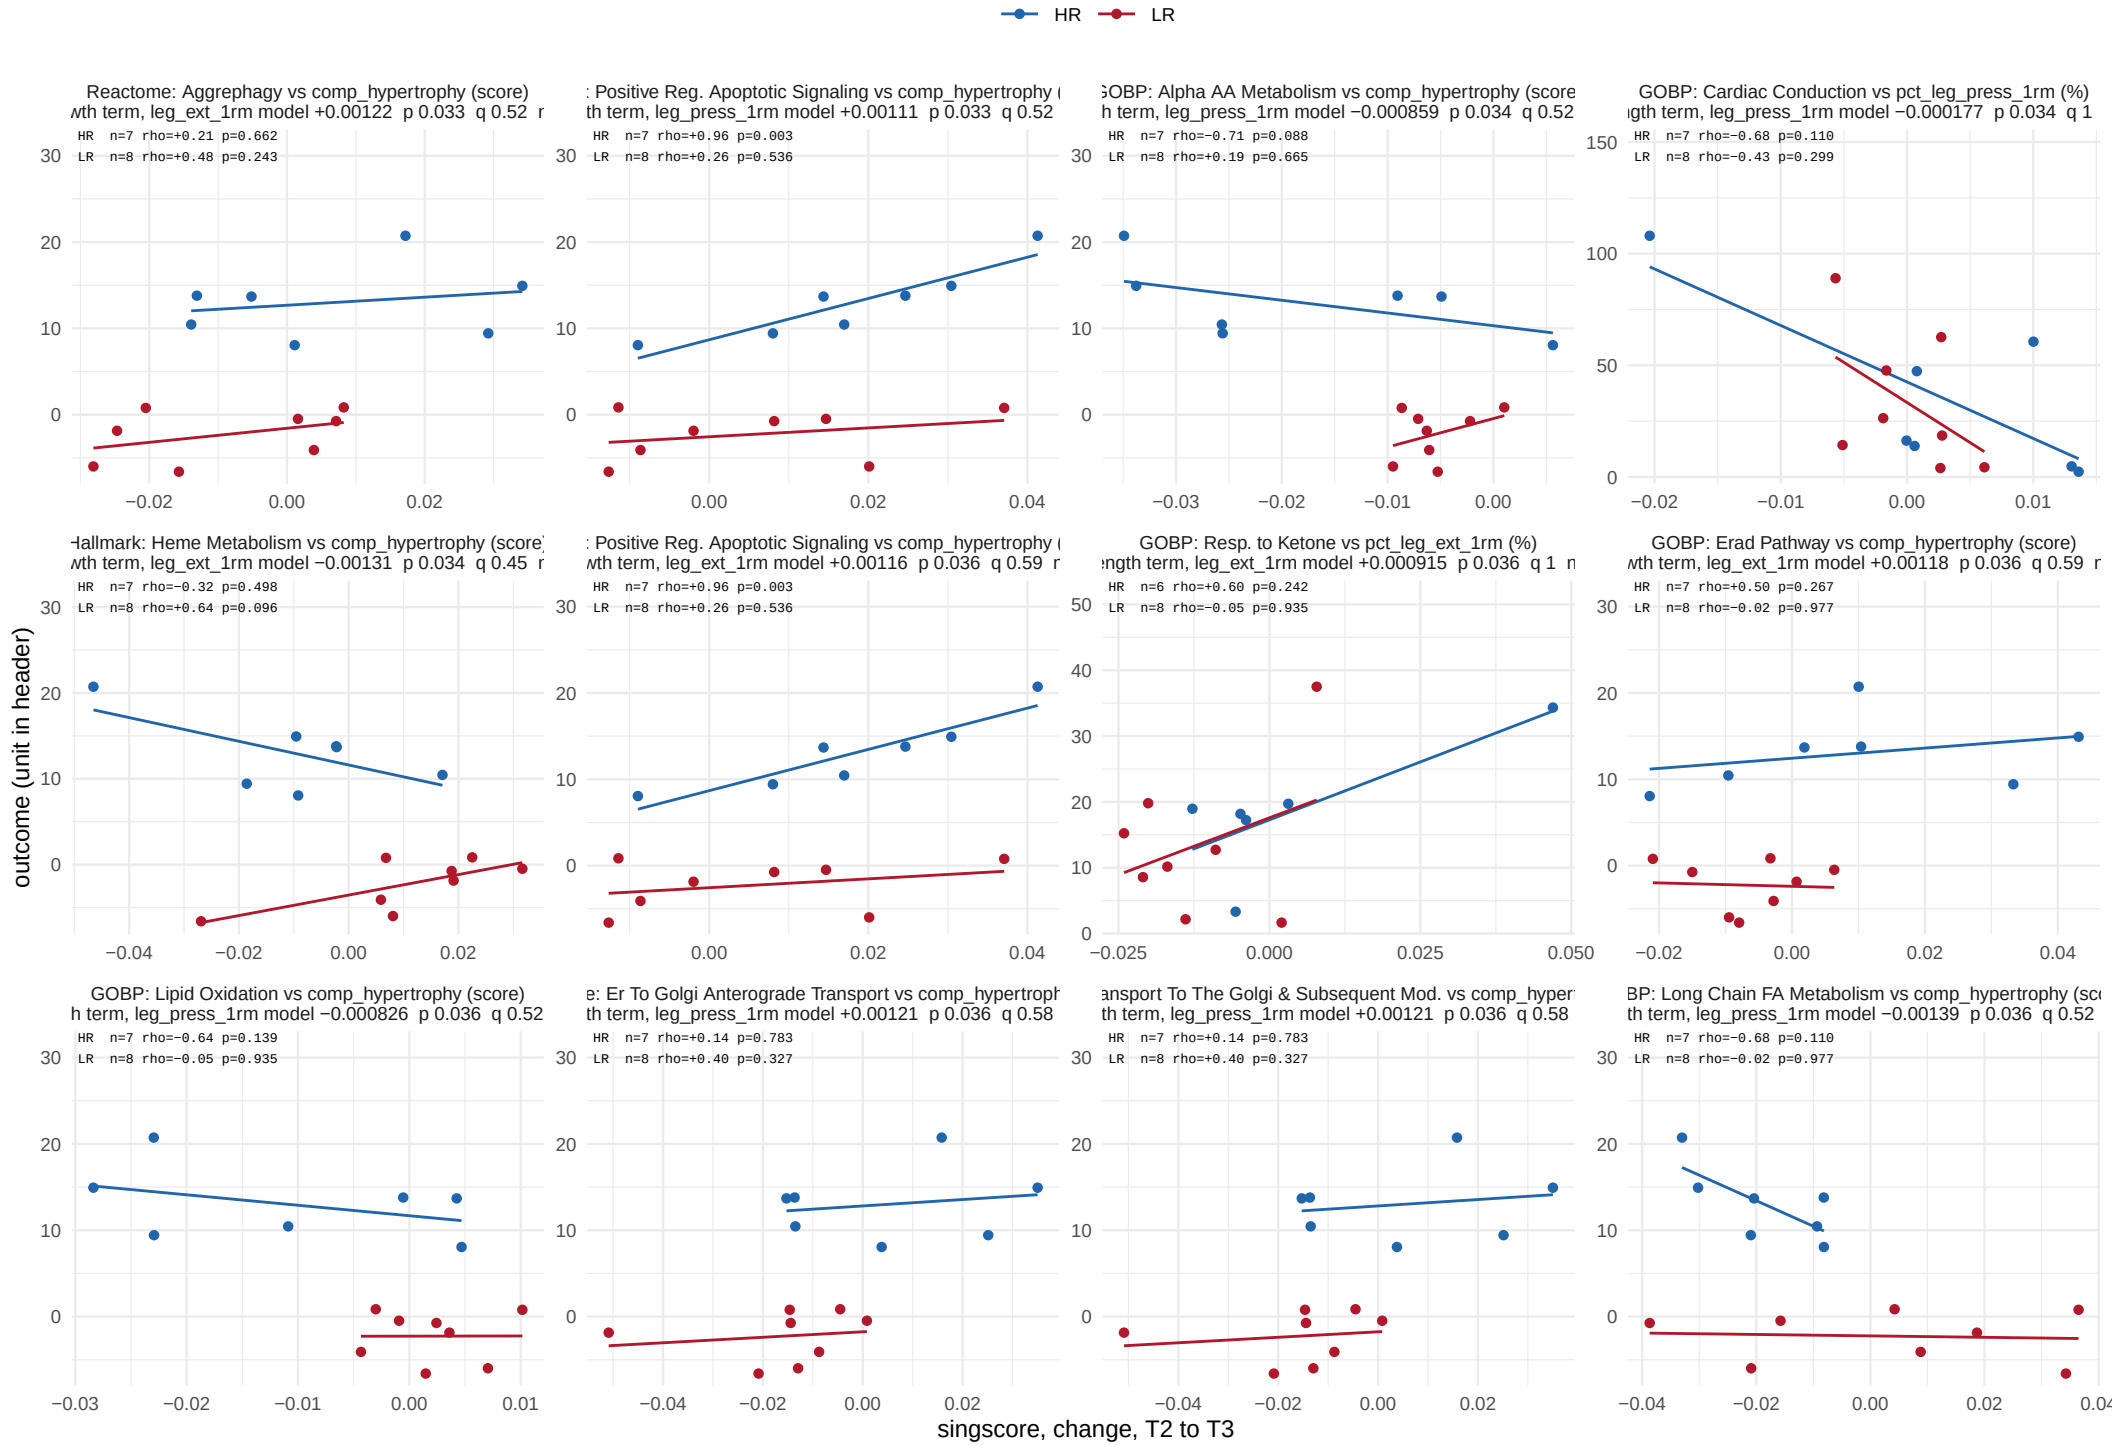

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, two_predictor.

Two predictor, acute window


242 of 5512 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 15 of 21.

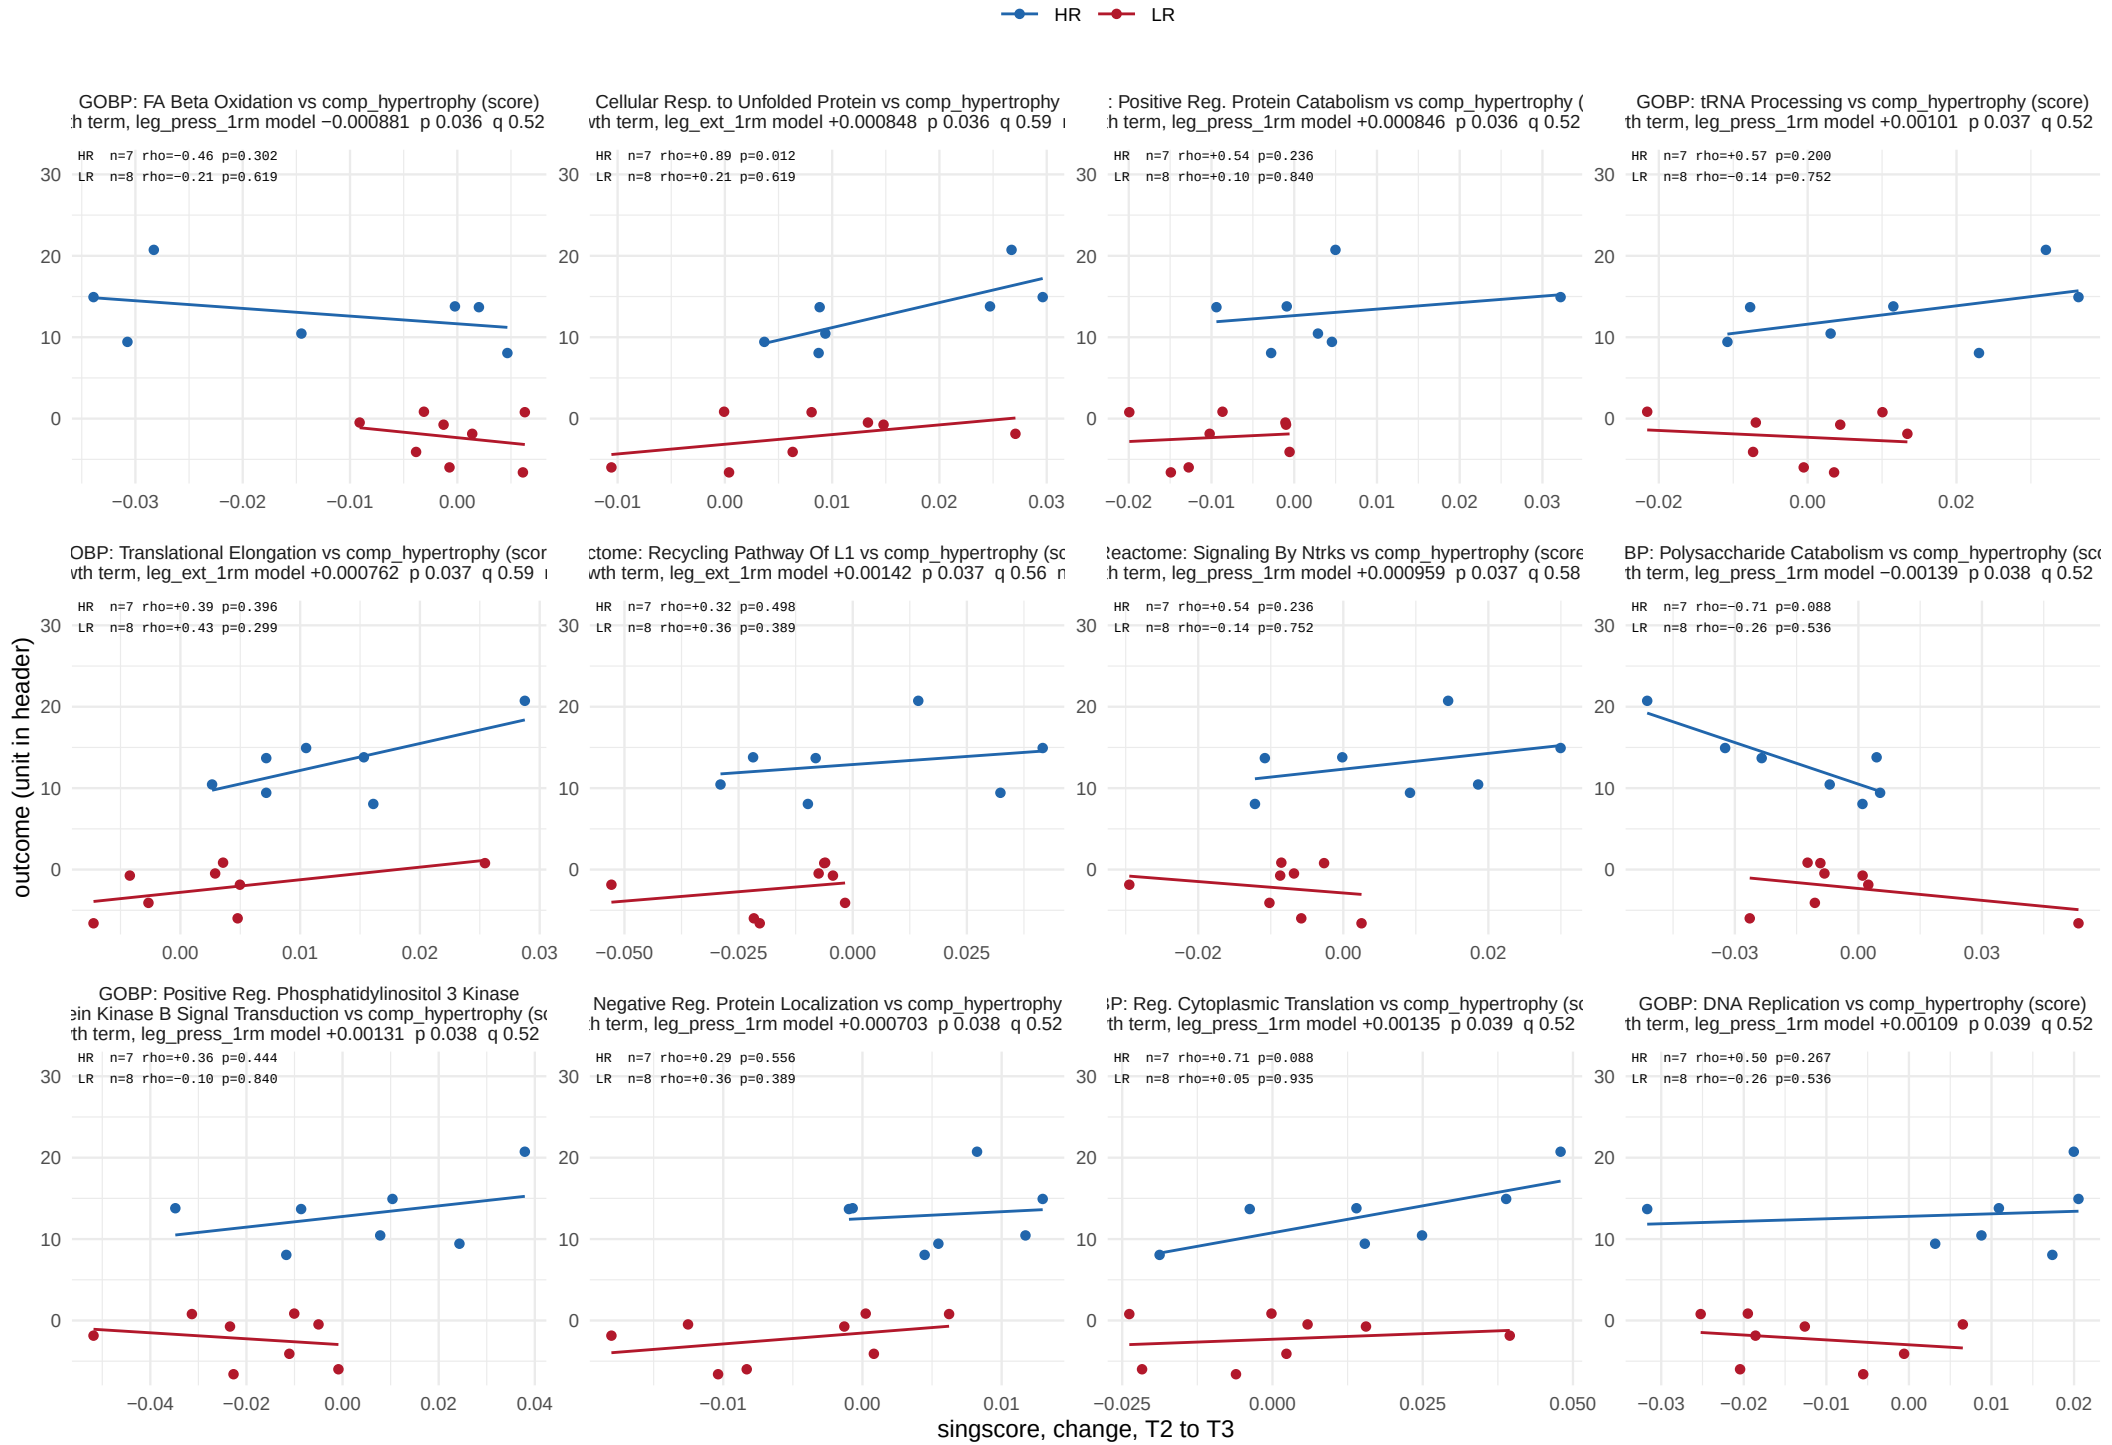

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, two_predictor.

Two predictor, acute window


242 of 5512 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 16 of 21.

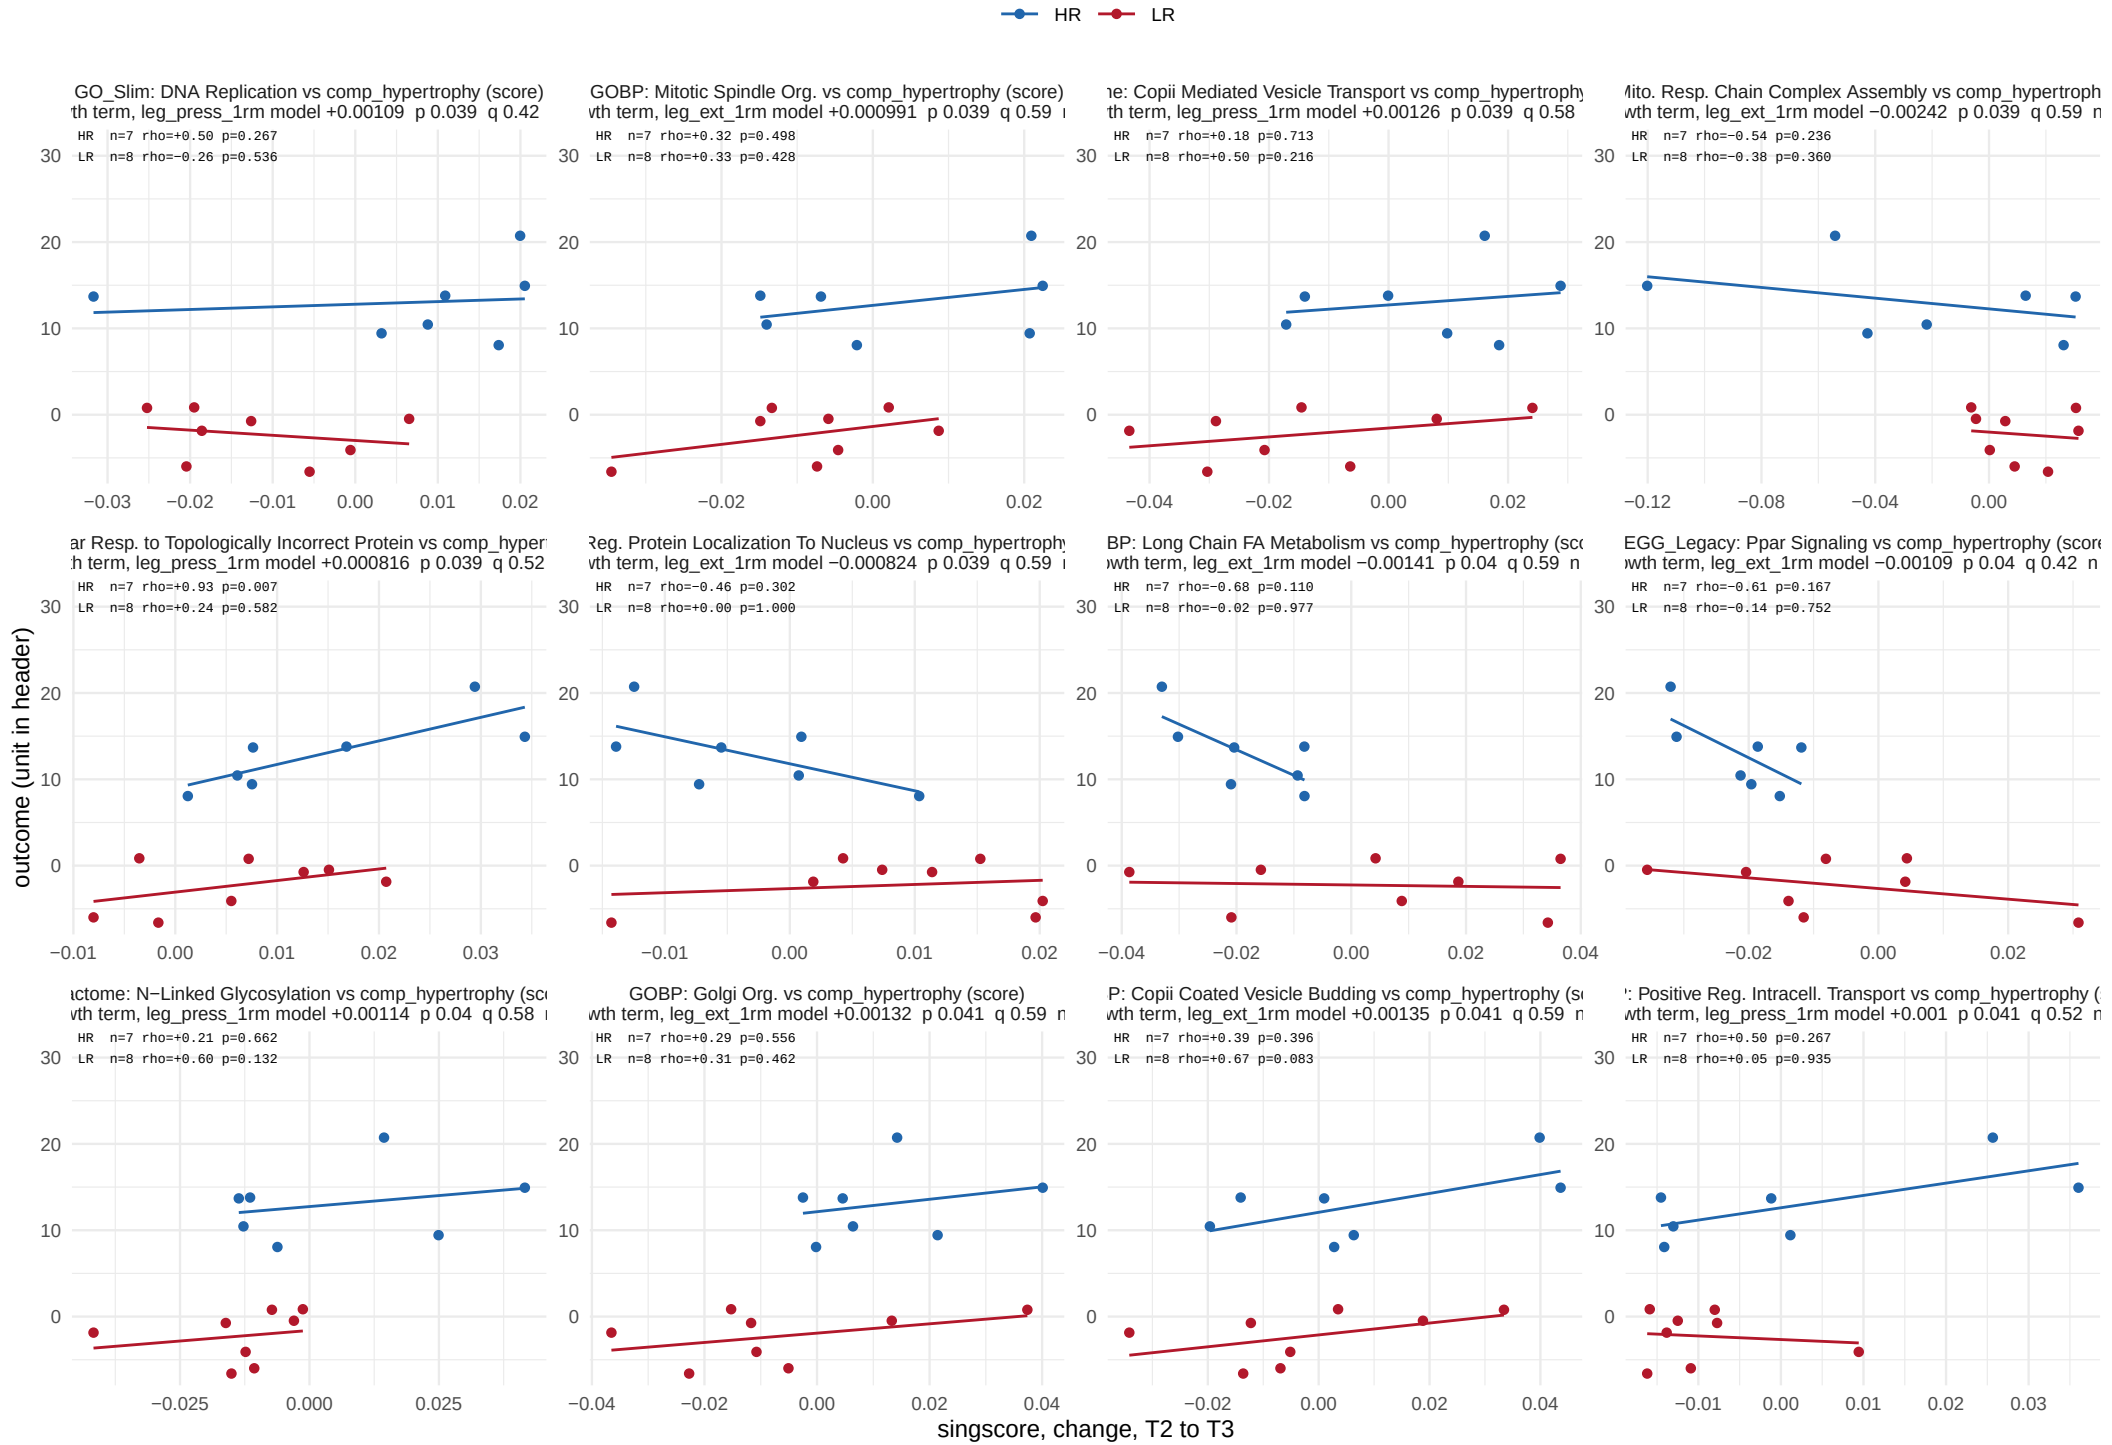

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, two_predictor.

Two predictor, acute window


242 of 5512 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 17 of 21.

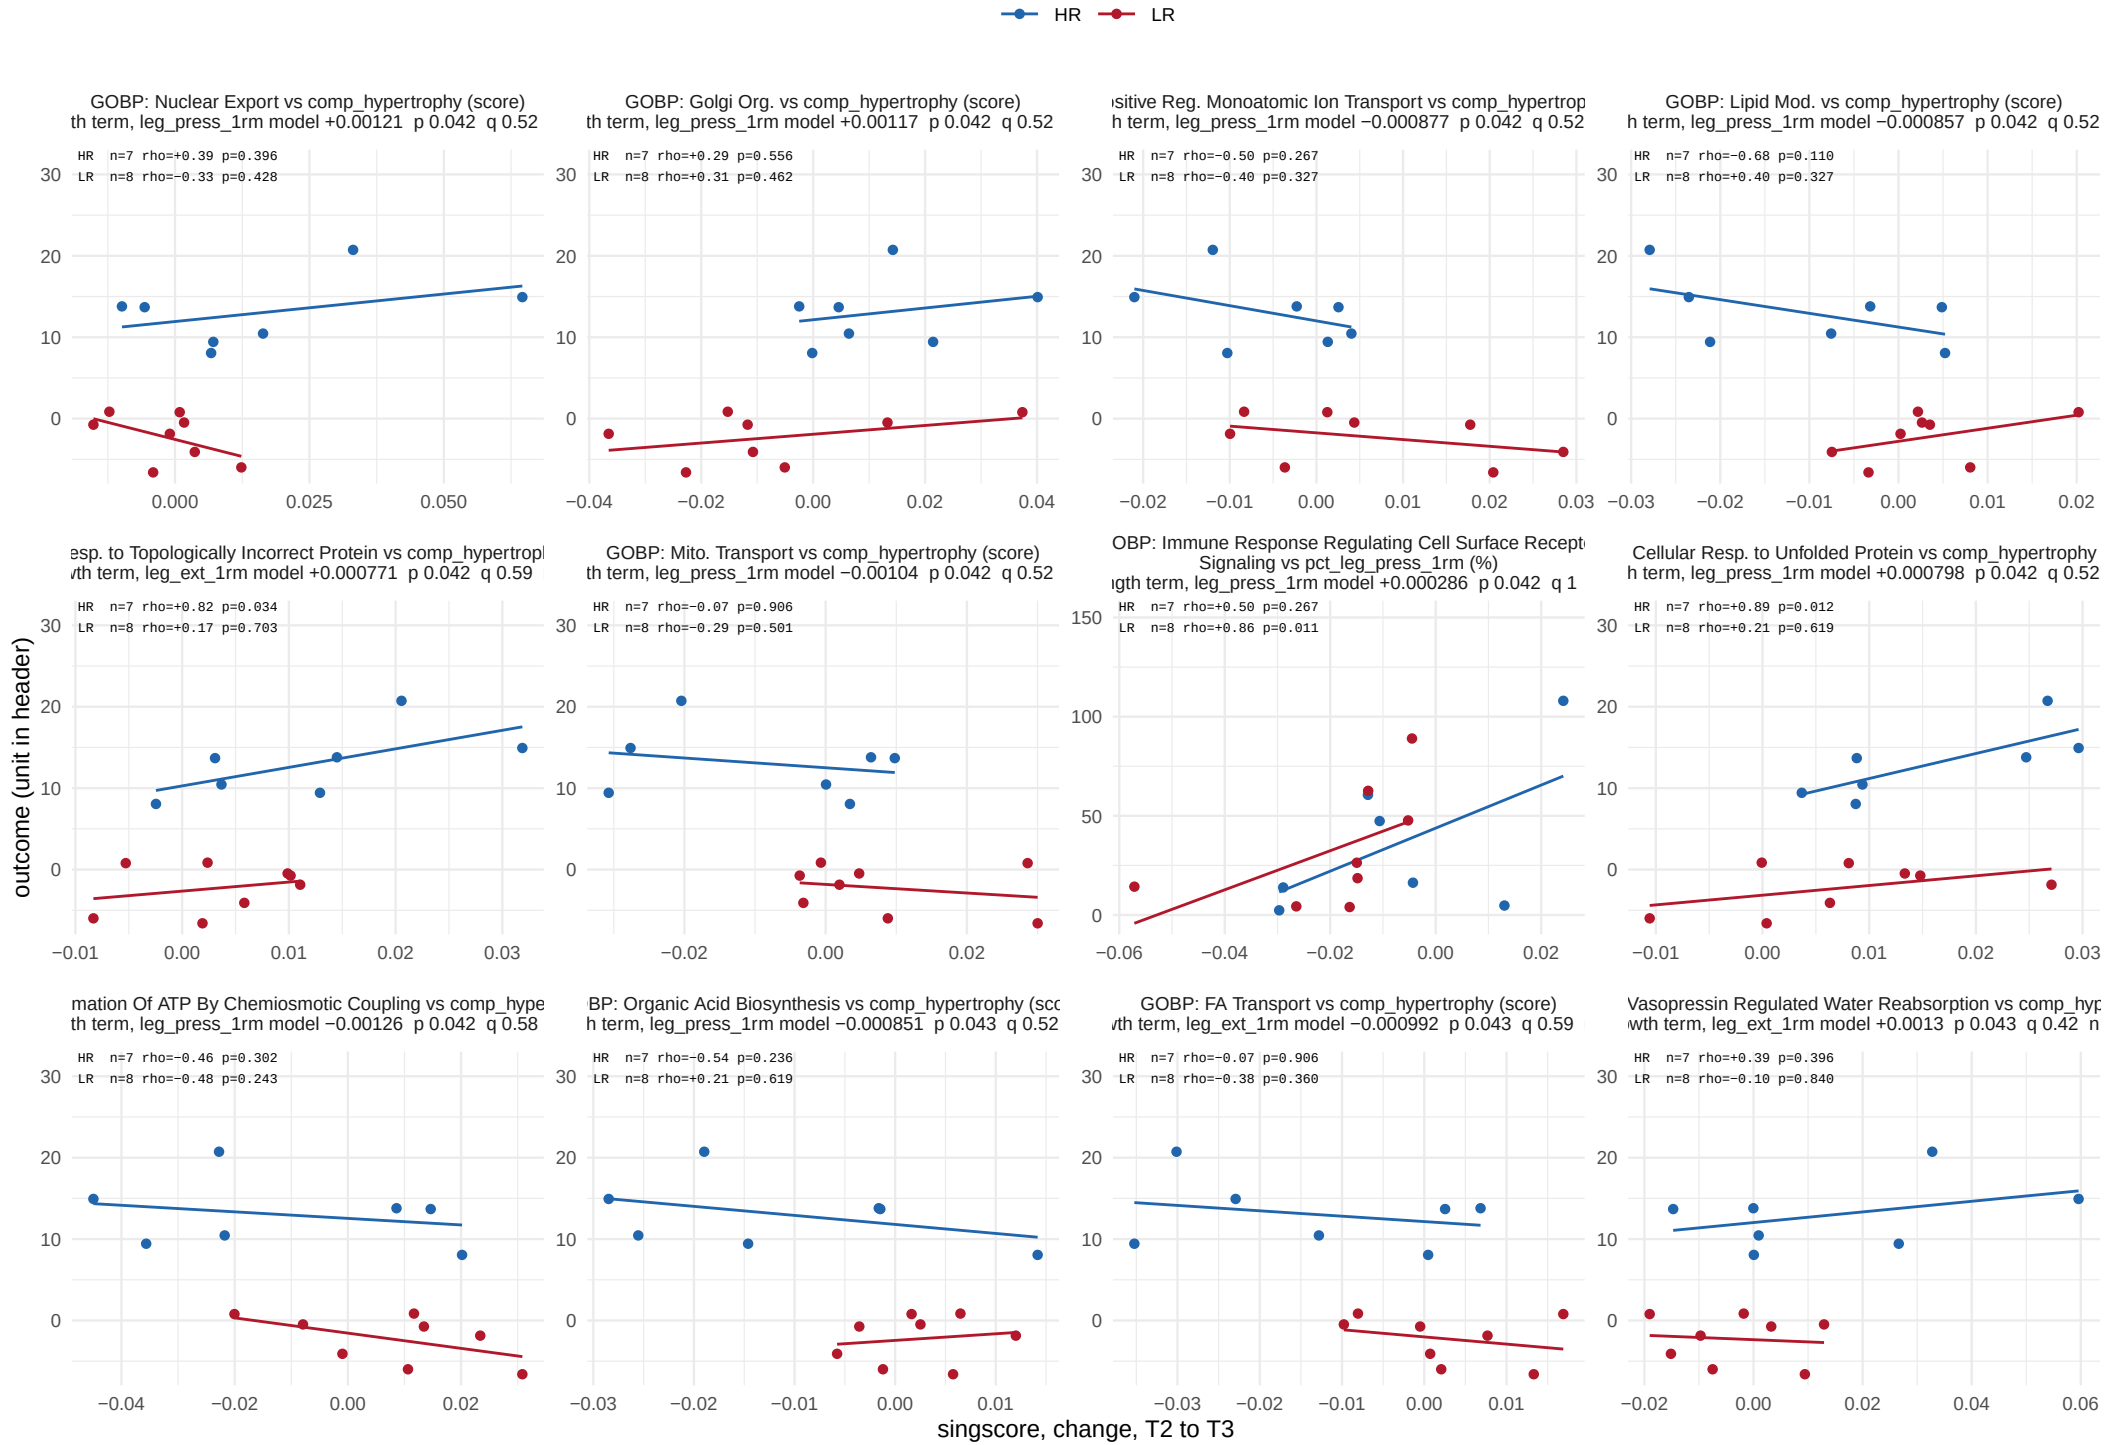

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, two_predictor.

Two predictor, acute window


242 of 5512 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 18 of 21.

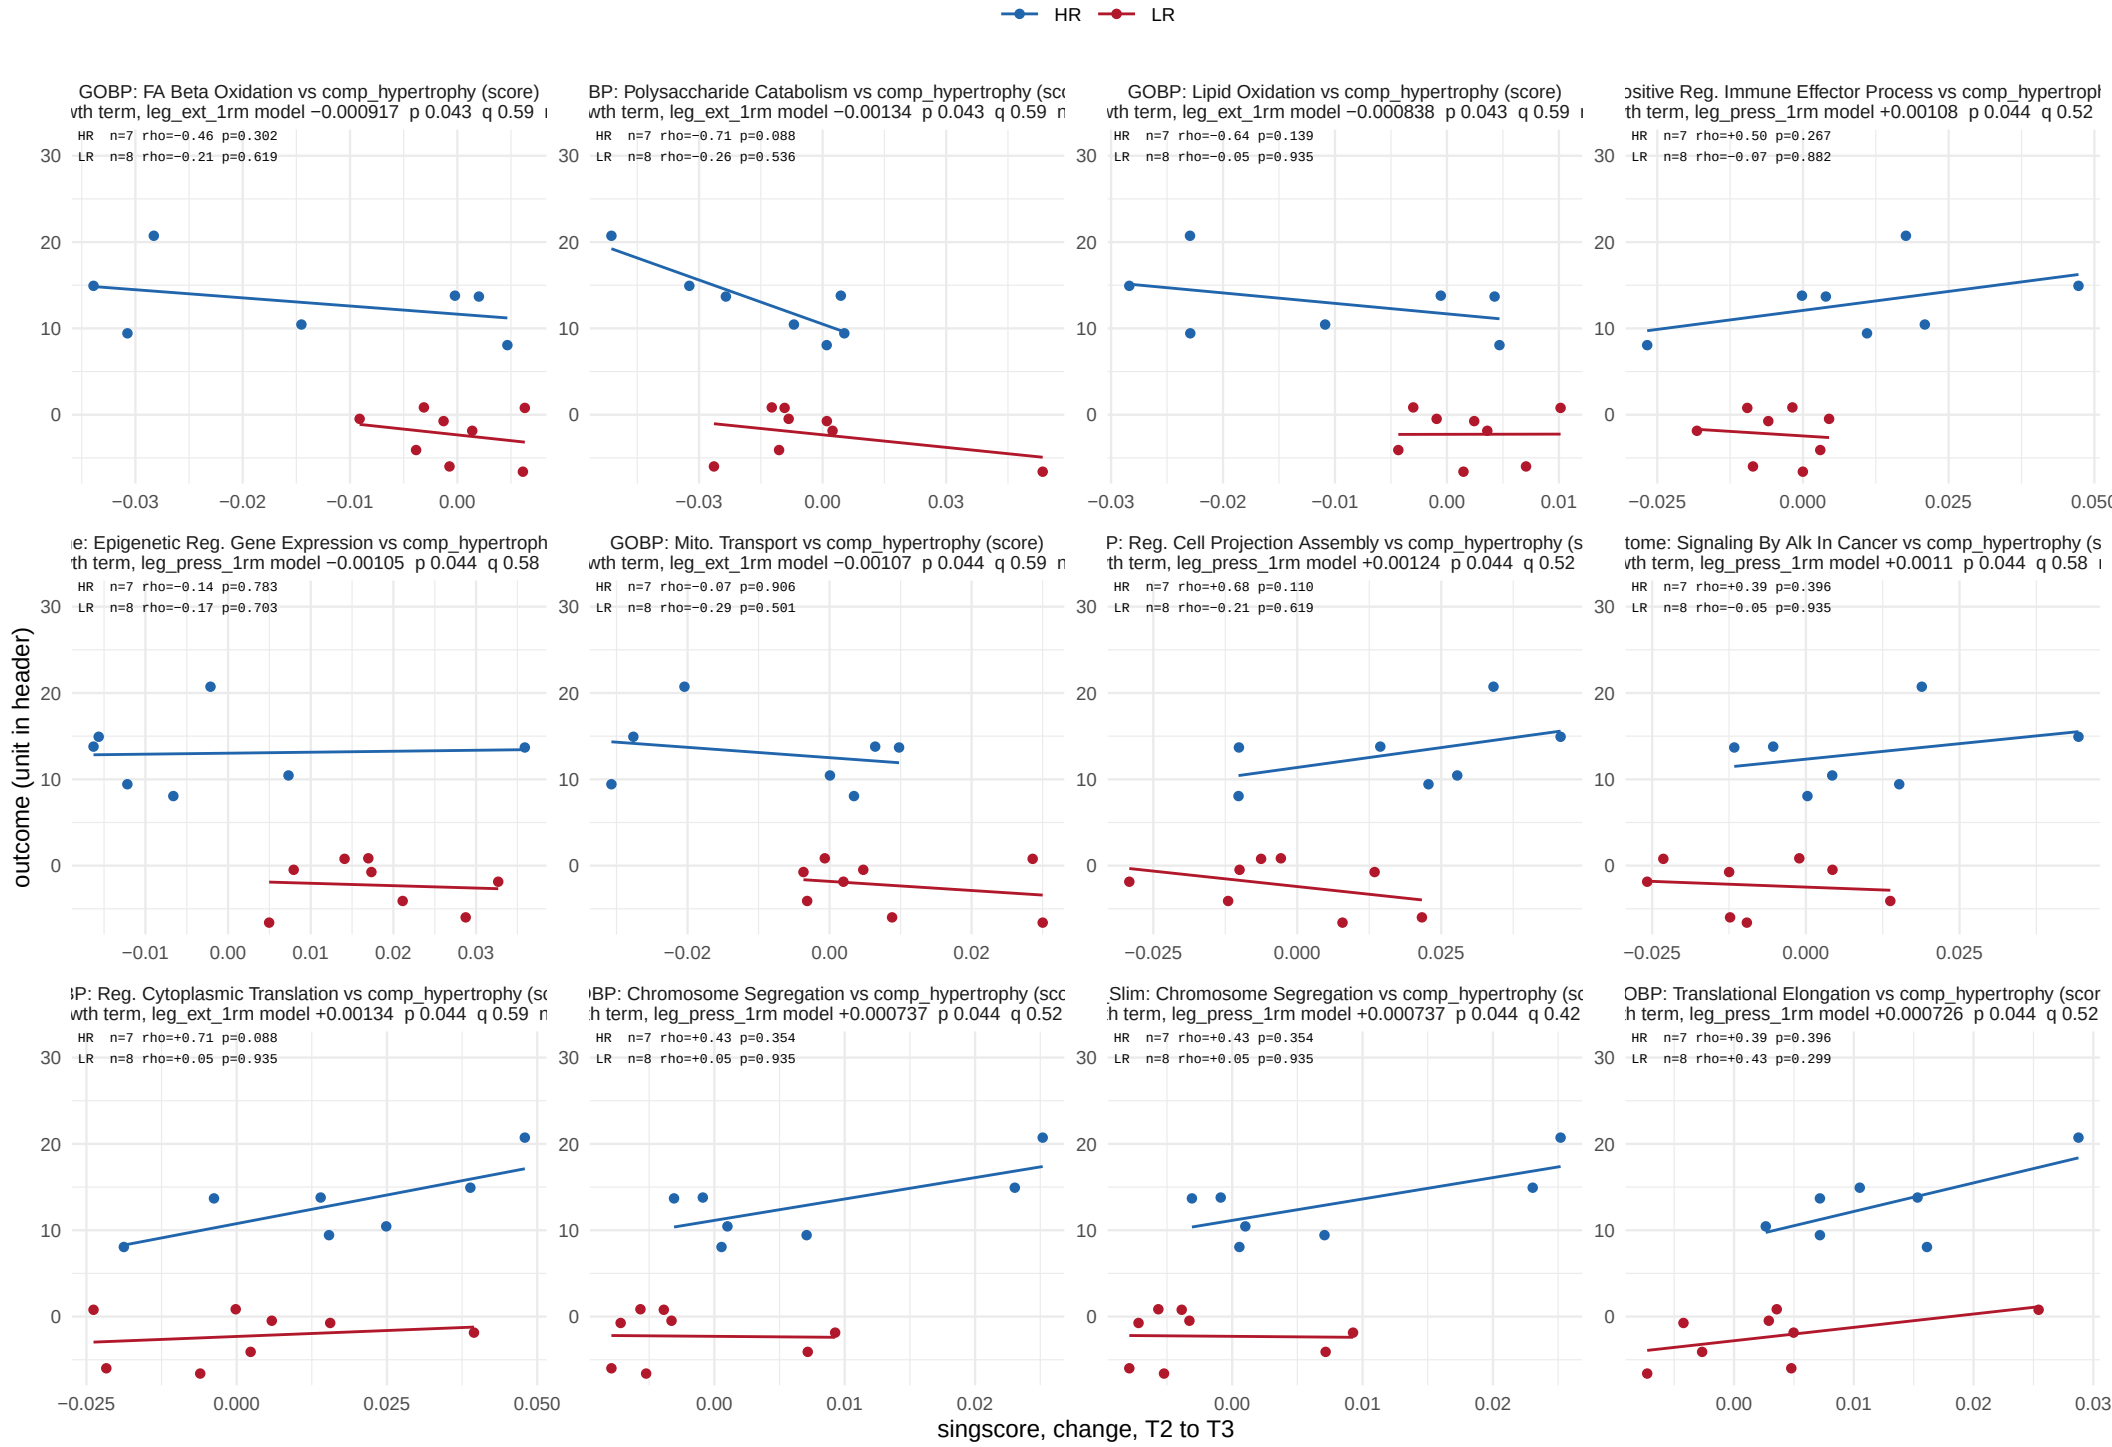

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, two_predictor.

Two predictor, acute window


242 of 5512 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 19 of 21.

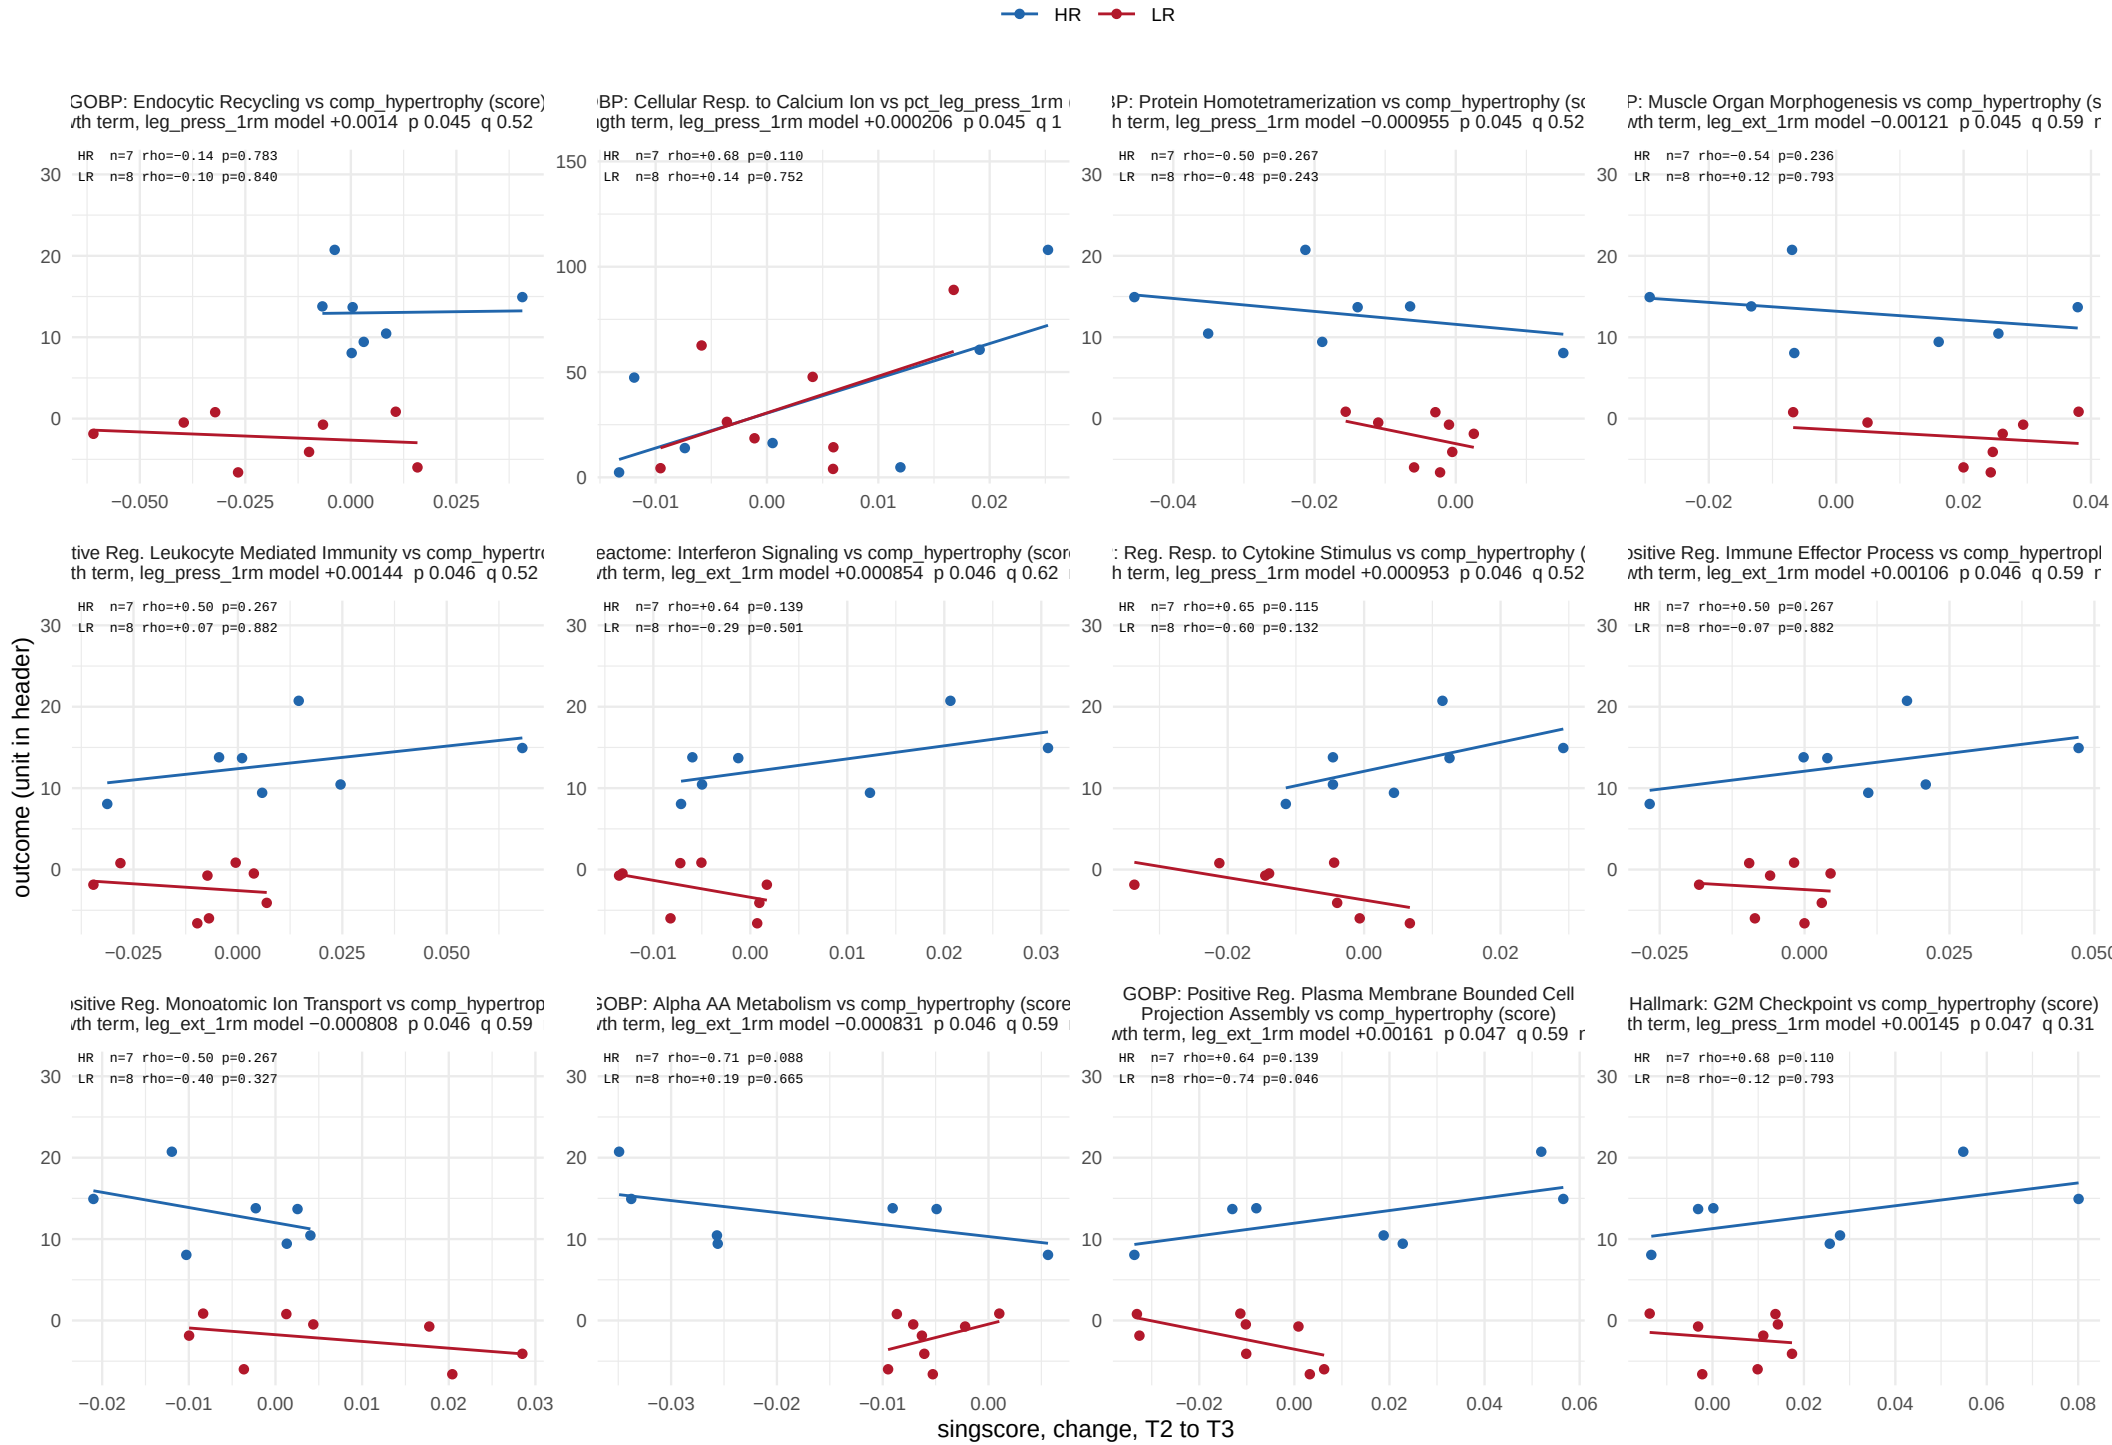

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, two_predictor.

Two predictor, acute window


242 of 5512 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 20 of 21.

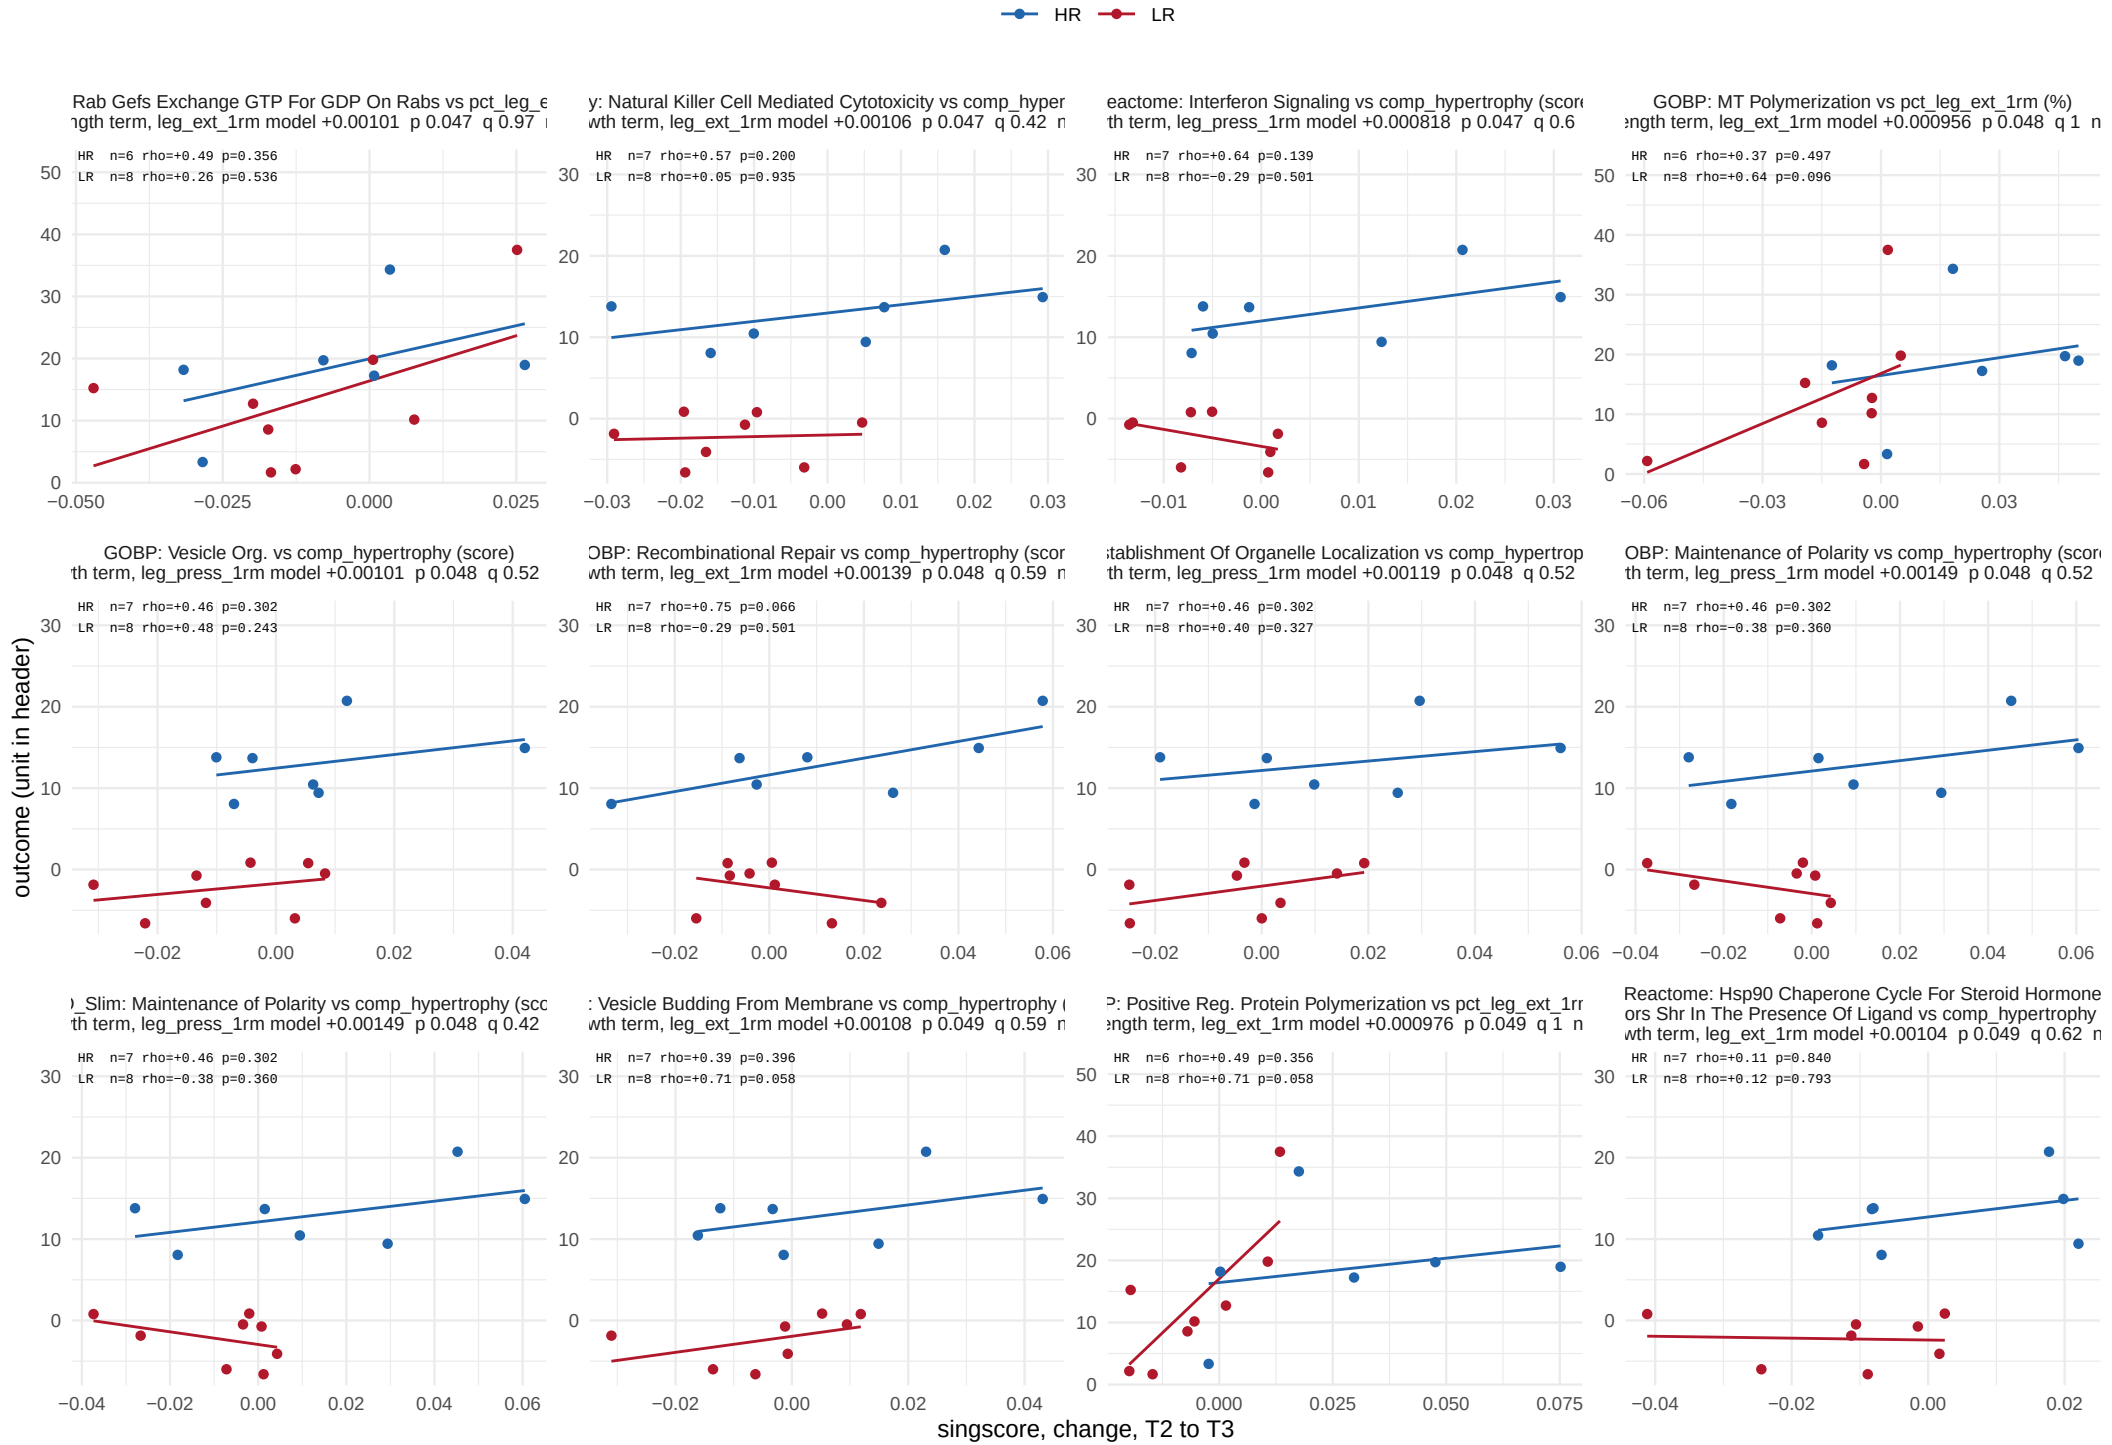

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, two_predictor.

Two predictor, acute window

242 of 5512 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 21 of 21.

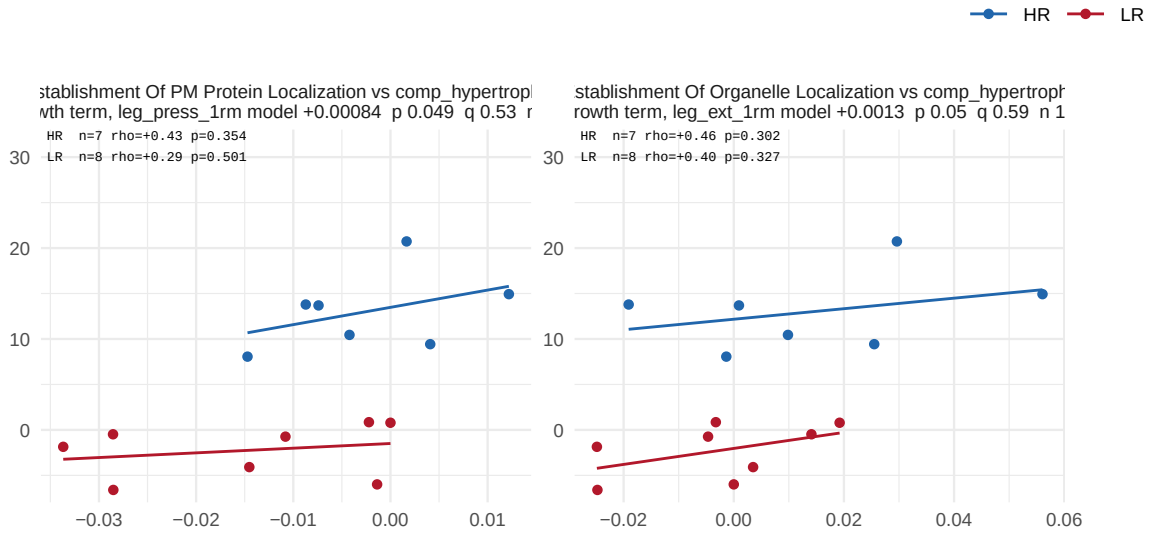

outcome (unit in header)

singscore, change, T2 to T3

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/05_associate.xlsx, two_predictor.