

Sample model overview: Hallmark

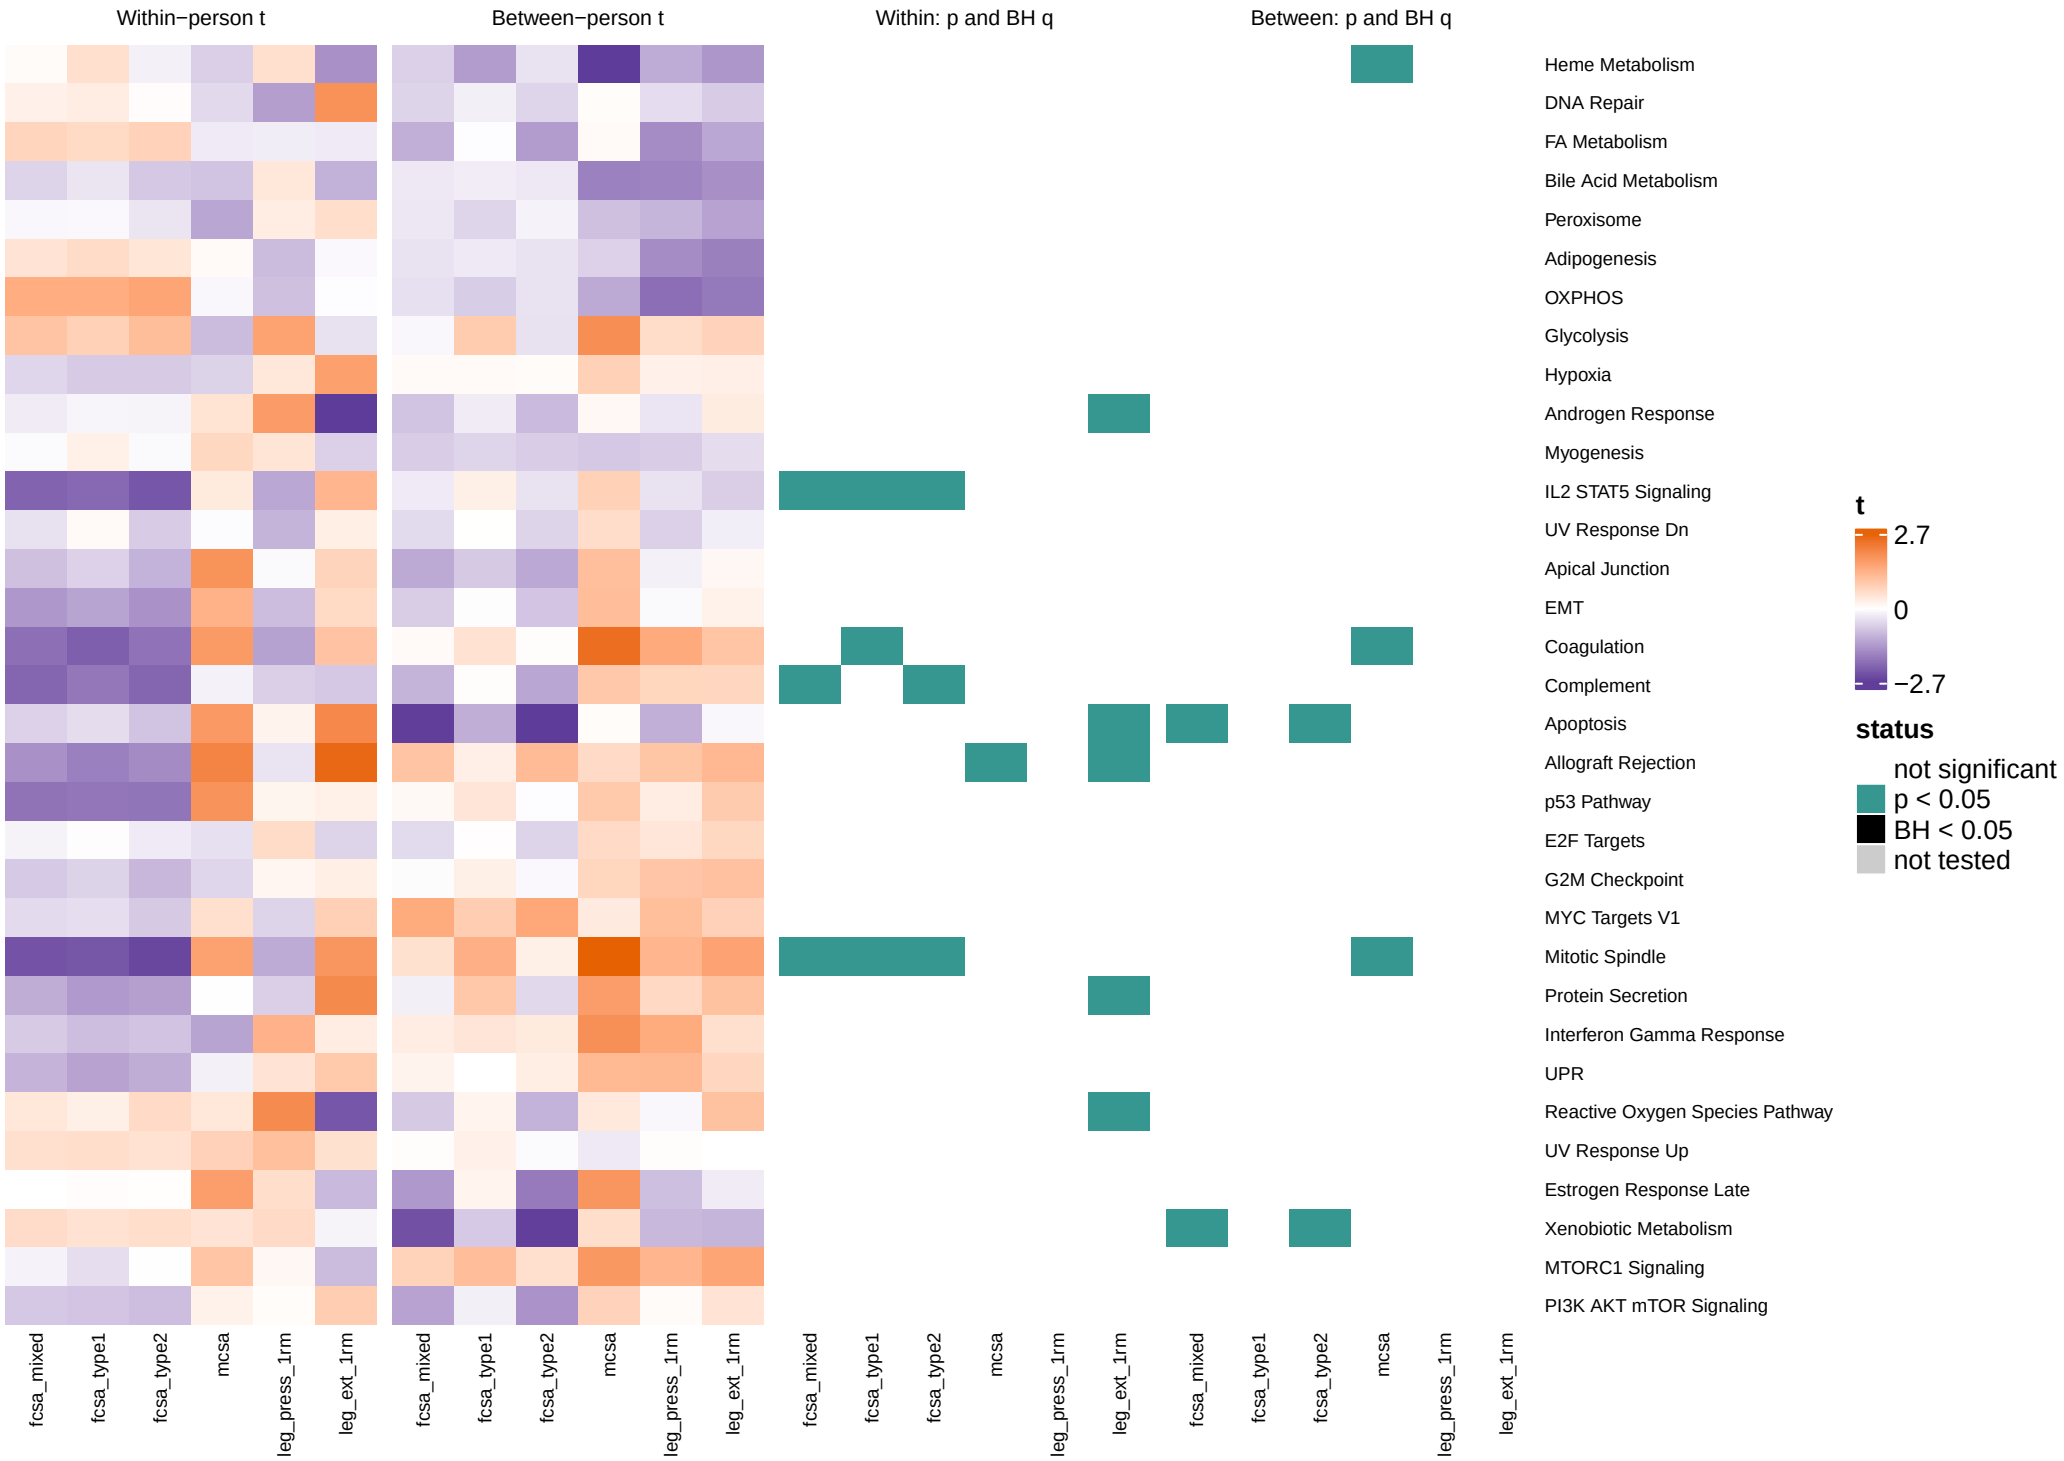


All 33 sets, one row each. Moderated t of the within and between terms, abundance ~ timepoint + between + within, subject blocked. Colours stop at the 99th percentile of |t|, 2.7. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/set_trait_associations.xlsx, model.

Change score overview, training window: Hallmark

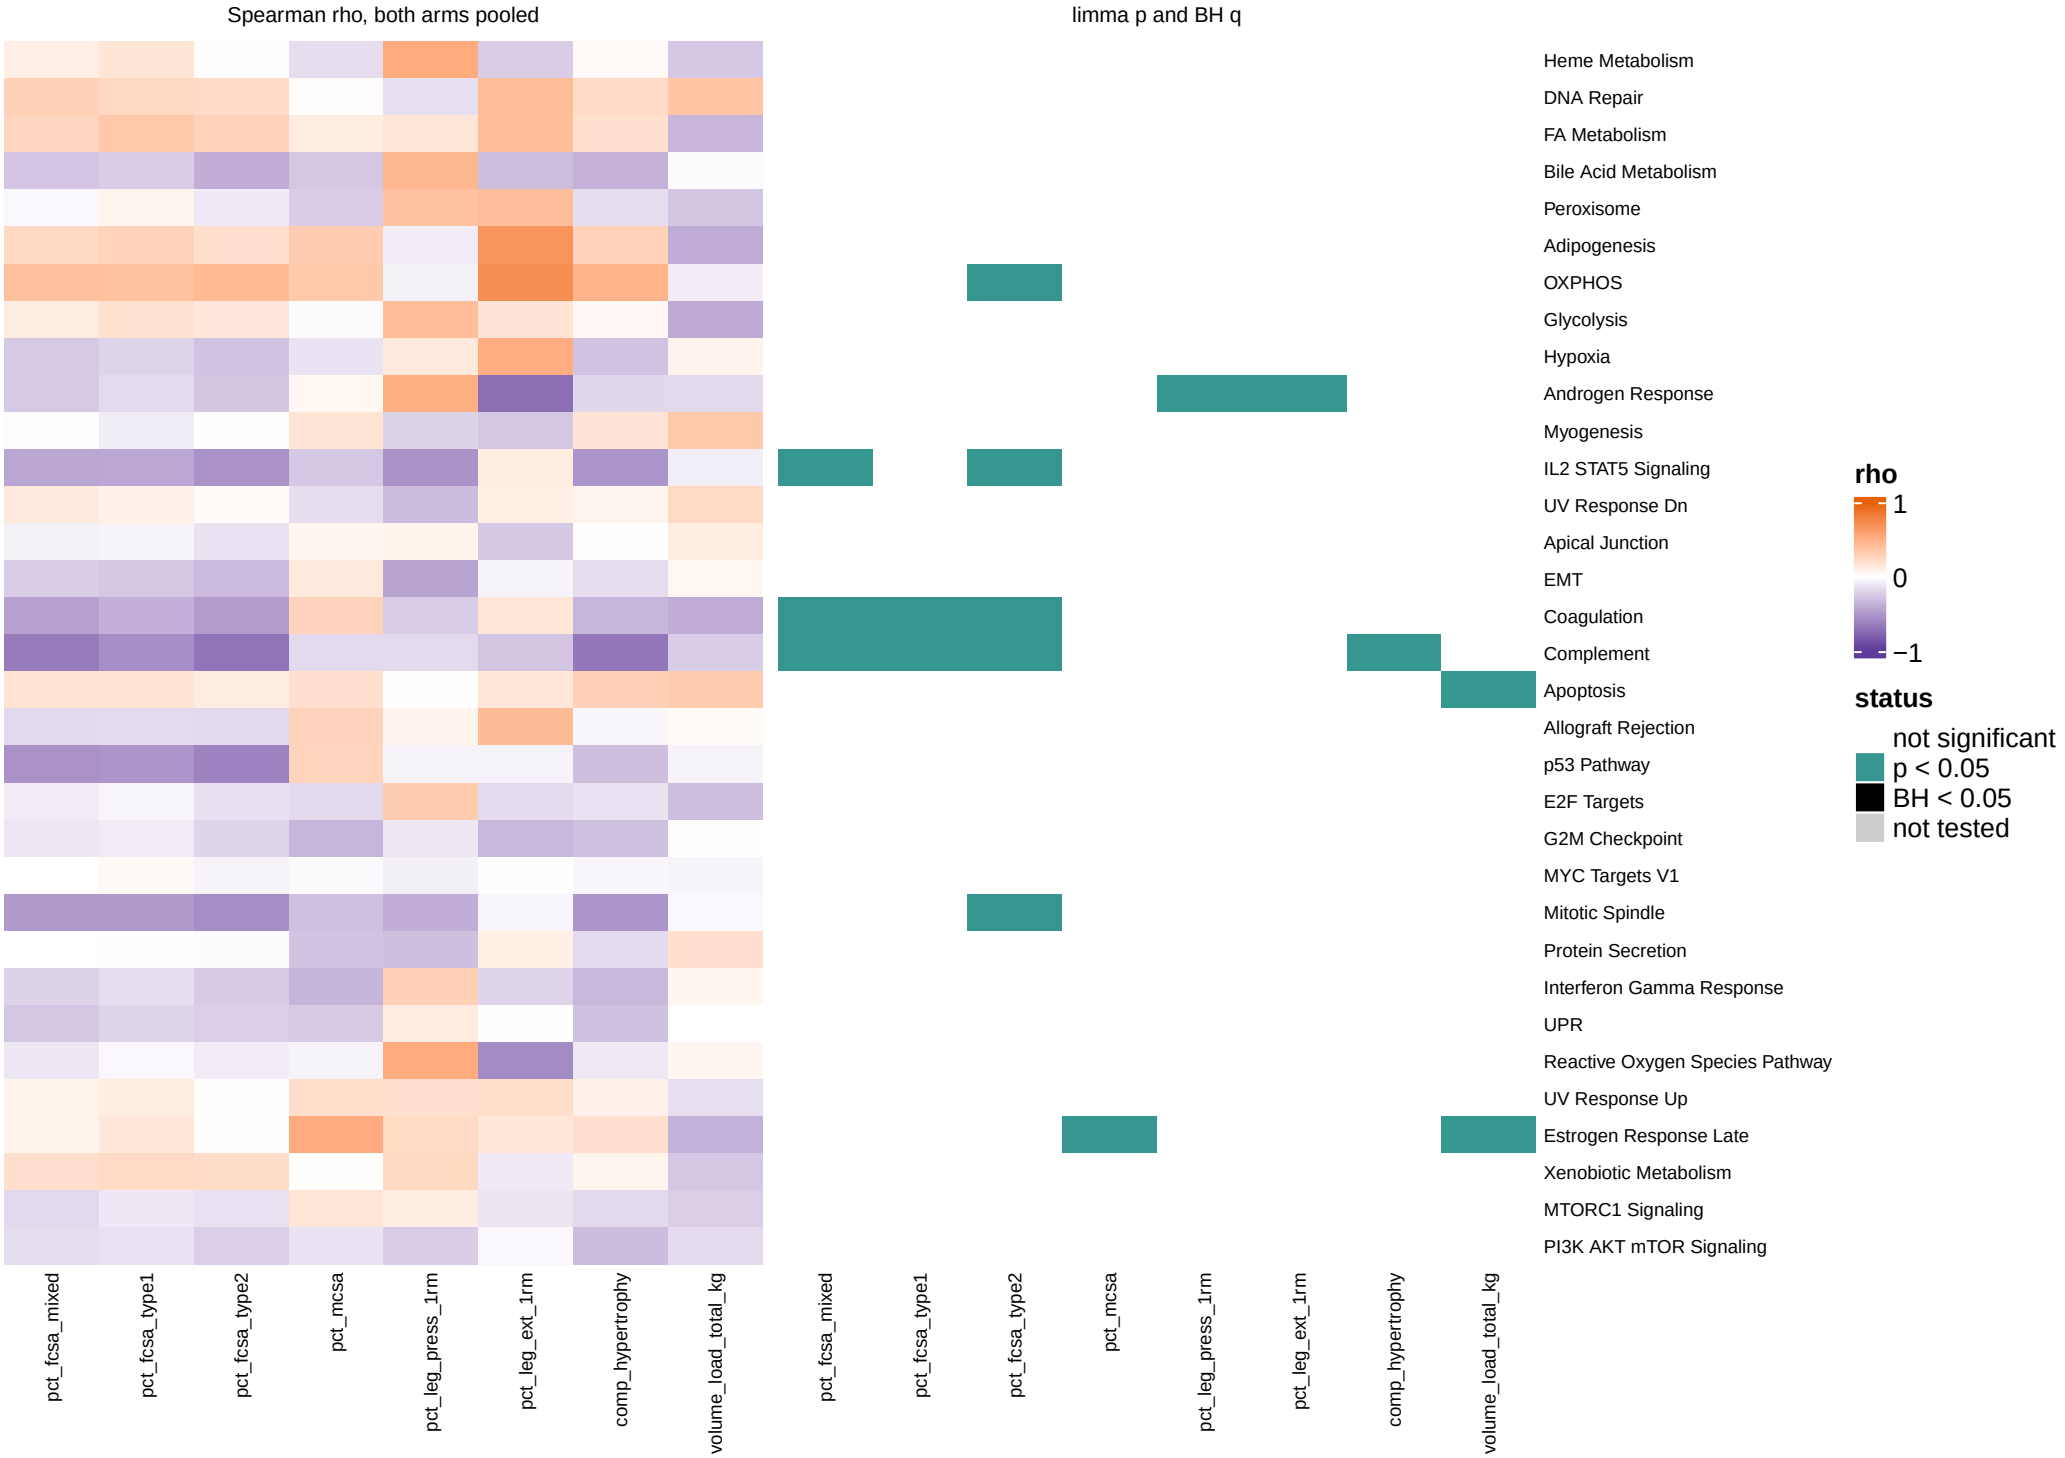


All 33 sets, one row each. Spearman rho between the singscore (change, T1 to T2) and each trait; status from limma. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/set_trait_associations.xlsx, change_score.

Change score overview, baseline window: Hallmark

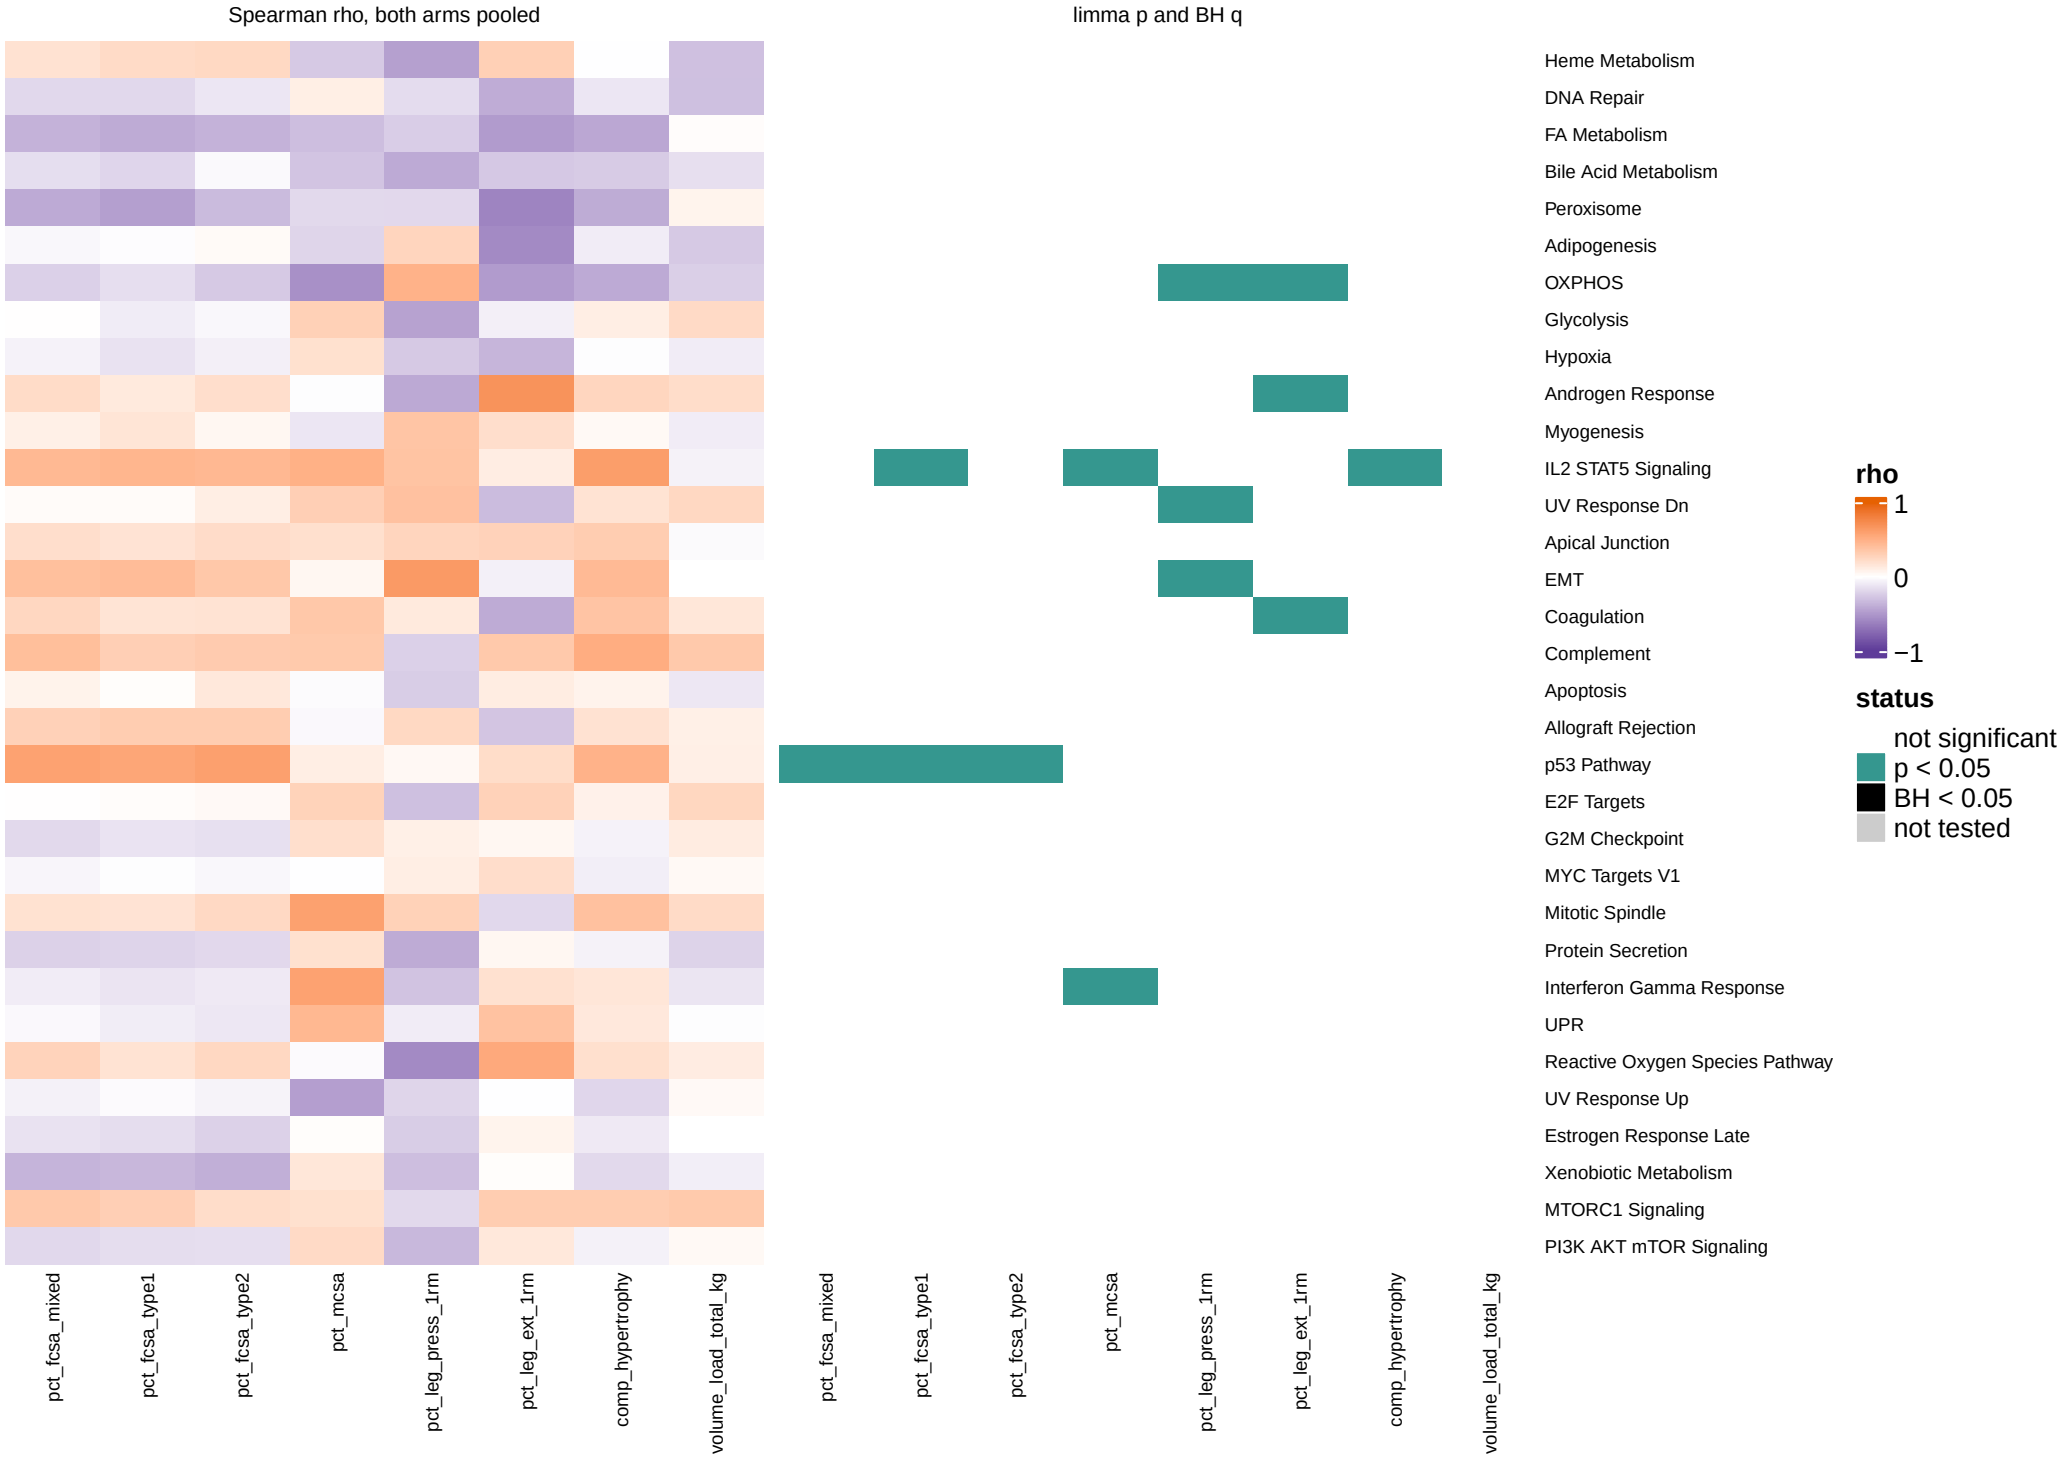


All 33 sets, one row each. Spearman rho between the singscore (T1 level) and each trait; status from limma. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/set_trait_associations.xlsx, change_score.

Change score overview, acute window: Hallmark

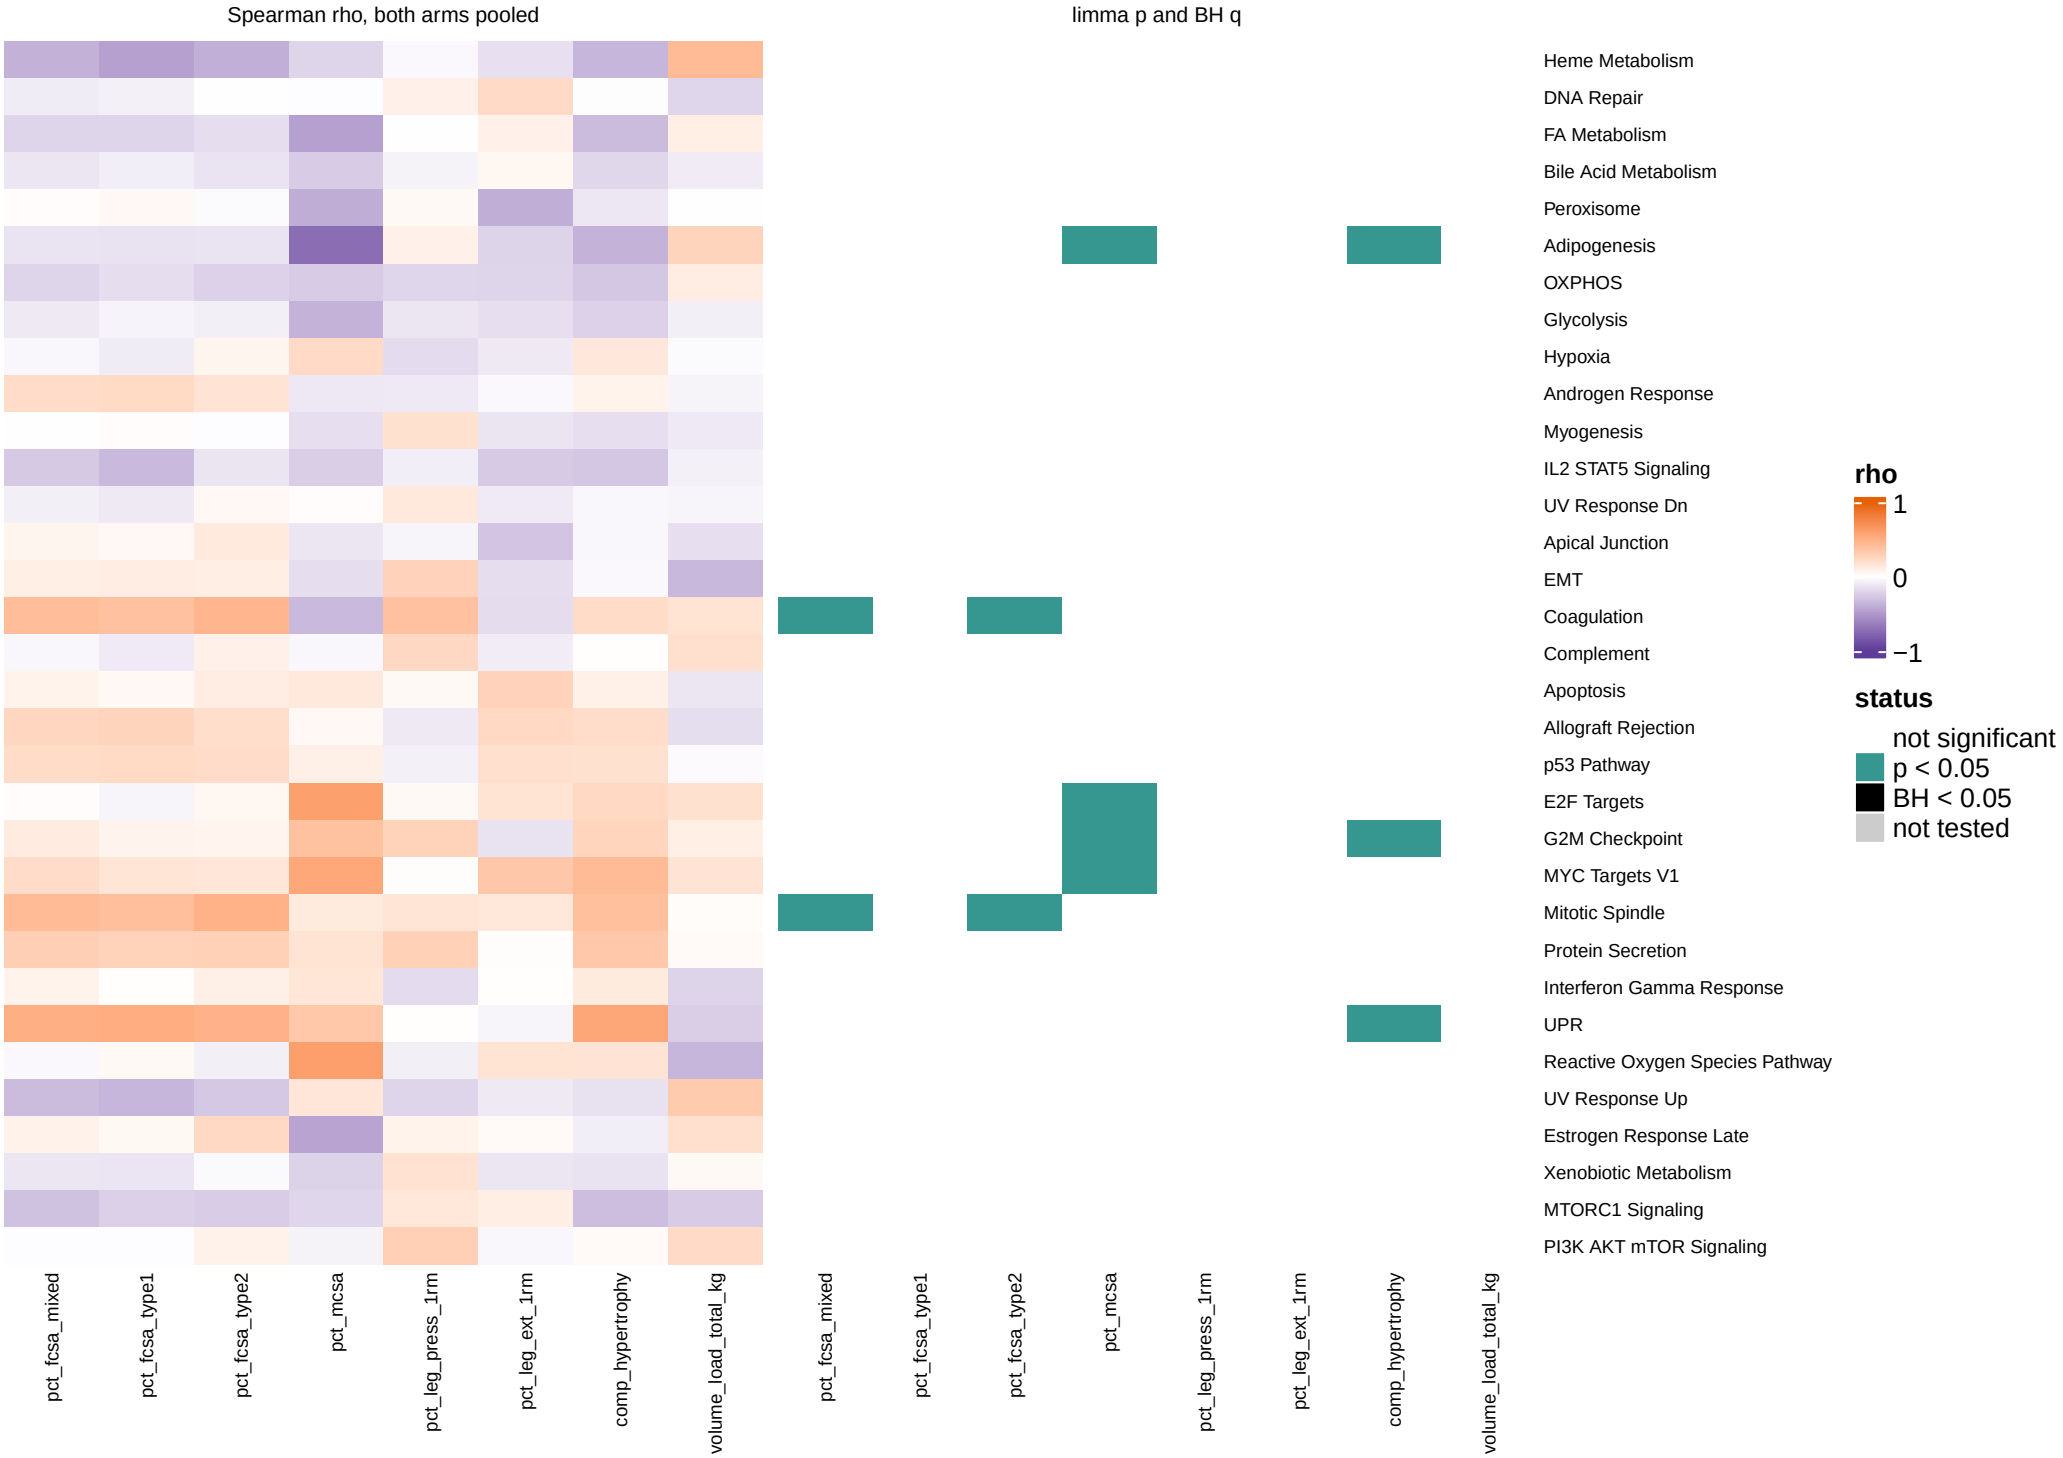


All 33 sets, one row each. Spearman rho between the singscore (change, T2 to T3) and each trait; status from limma. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/set_trait_associations.xlsx, change_score.

Change score overview, baseline_level window: Hallmark

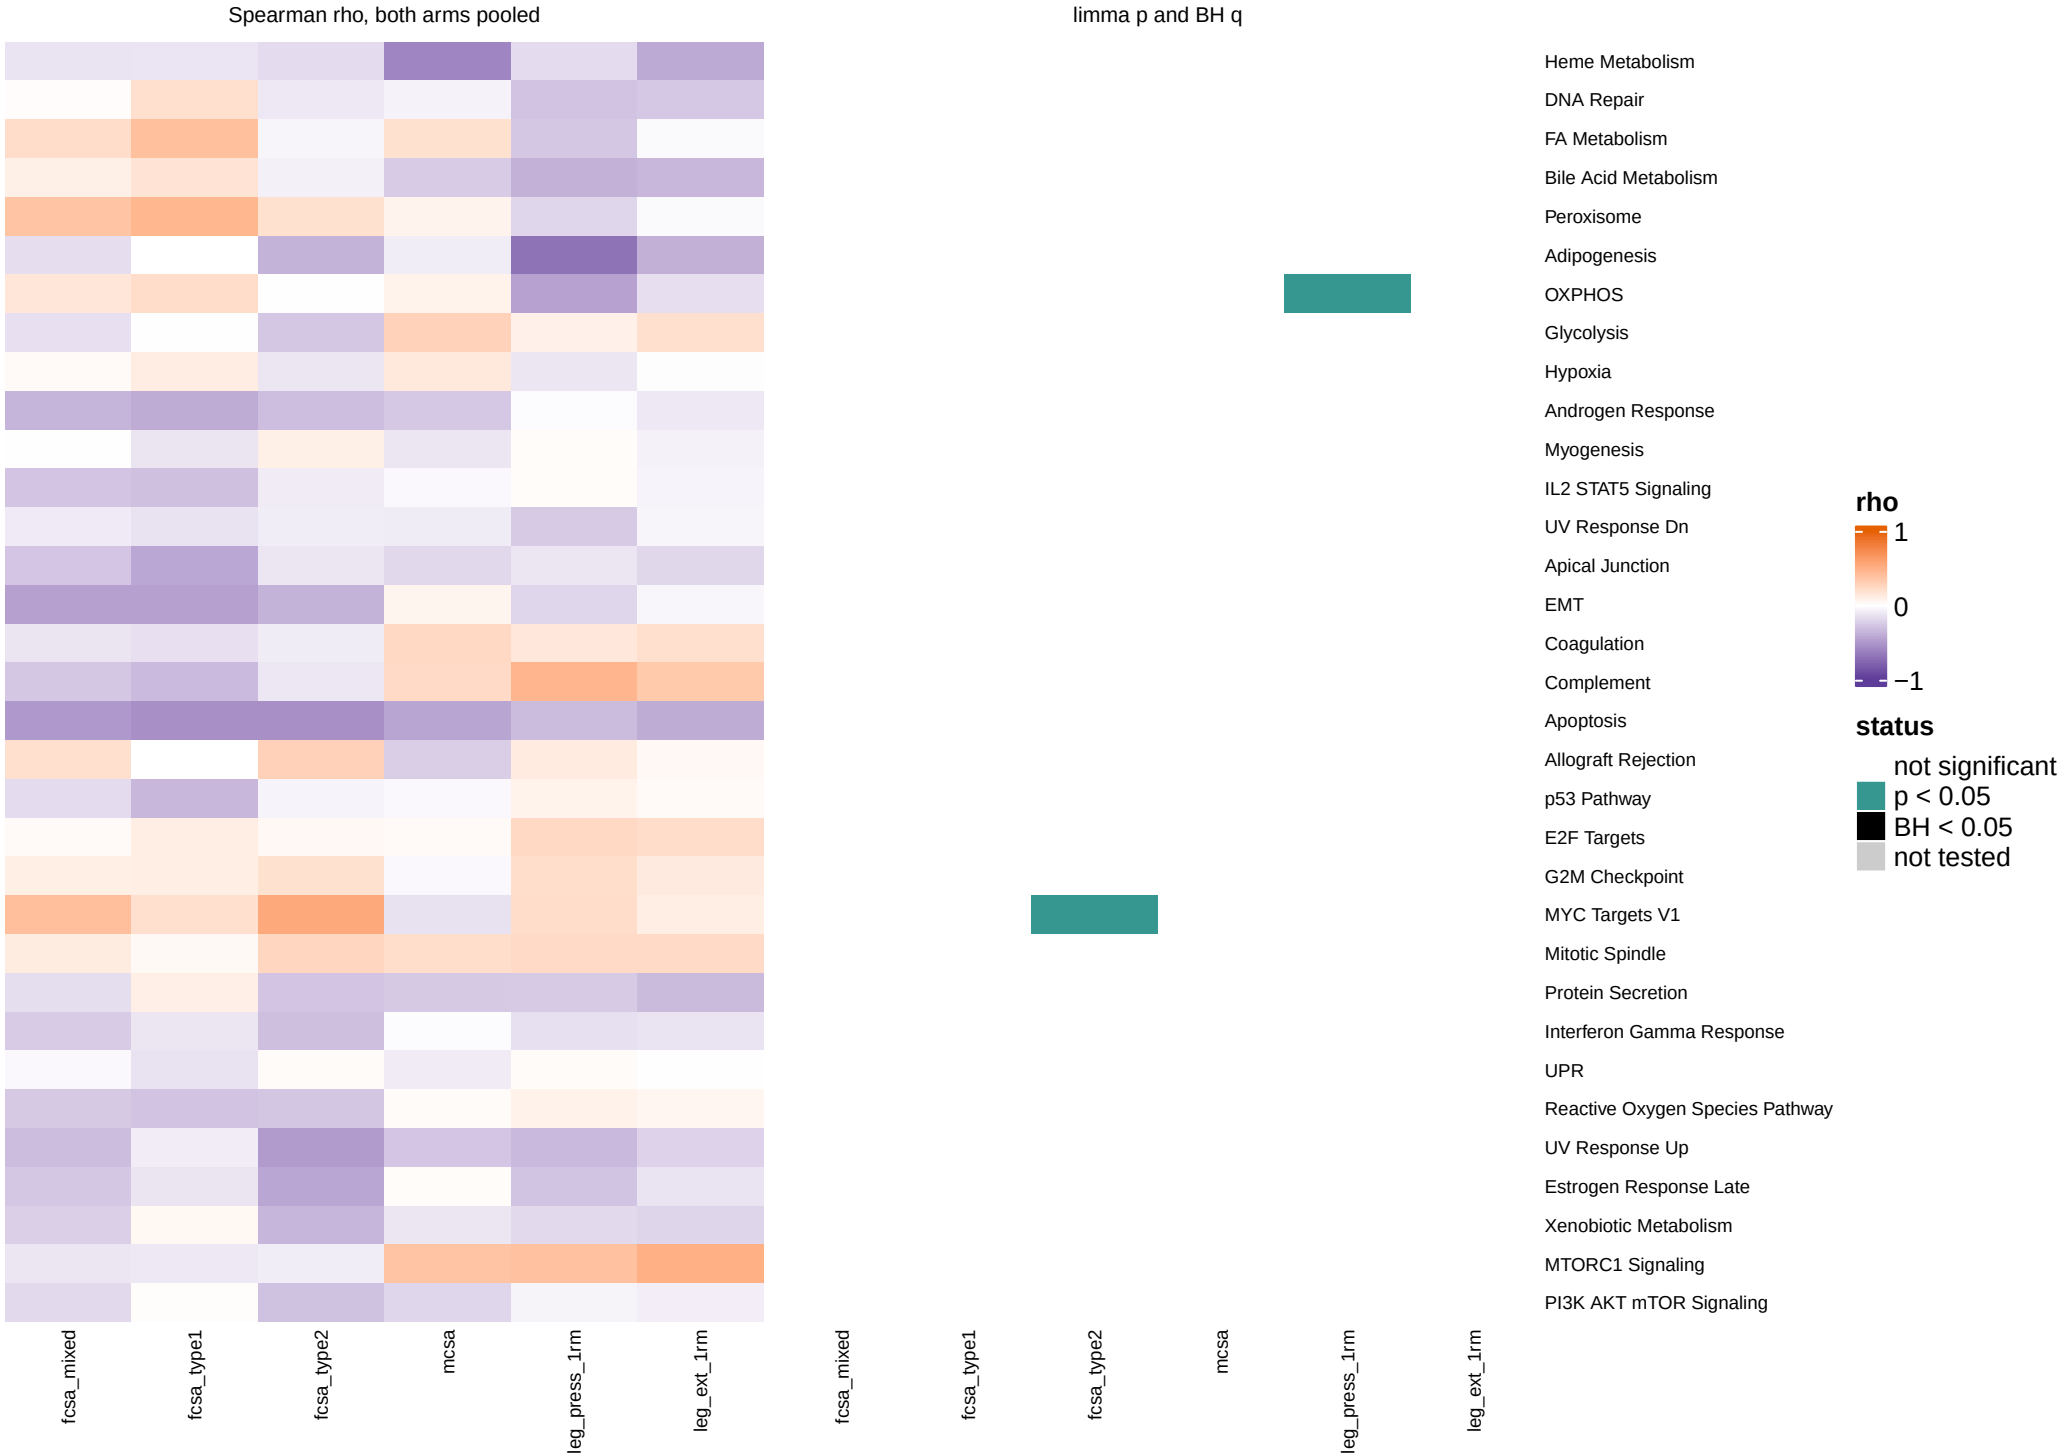

All 33 sets, one row each. Spearman rho between the singscore (T1 level) and each trait; status from limma. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/set_trait_associations.xlsx, change_score.

Change score overview, post_level window: Hallmark

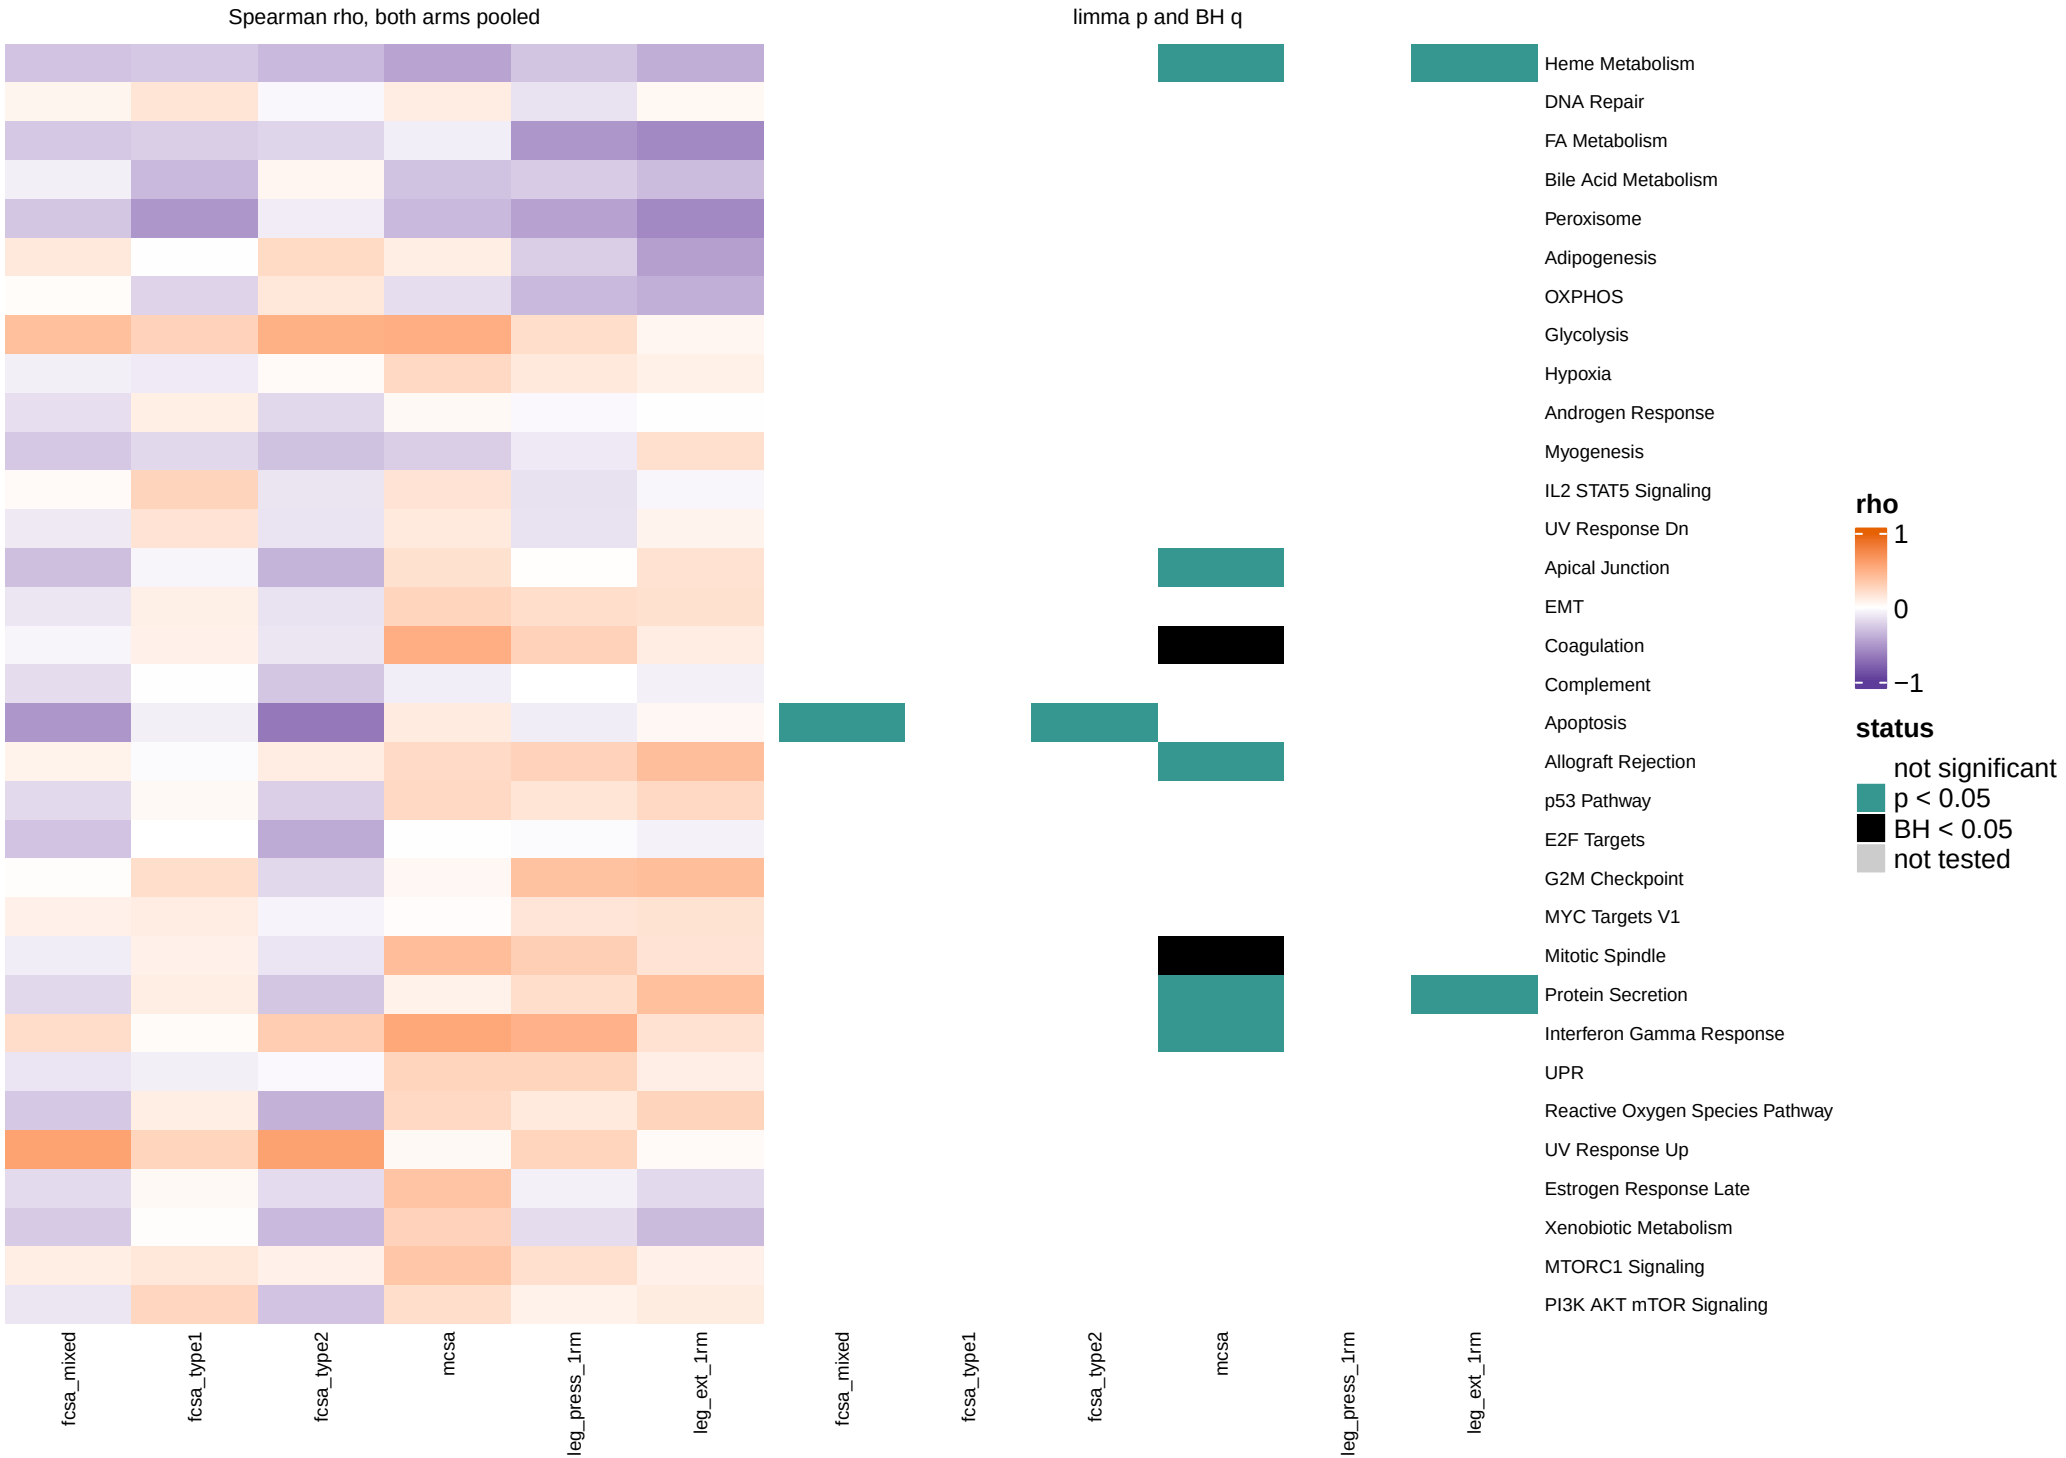


All 33 sets, one row each. Spearman rho between the singscore (T2 level) and each trait; status from limma. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/set_trait_associations.xlsx, change_score.

Change score overview, post_bout_level window: Hallmark




All 33 sets, one row each. Spearman rho between the singscore (T3 level) and each trait; status from limma. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/set_trait_associations.xlsx, change_score.

Sample model overview: Reactome

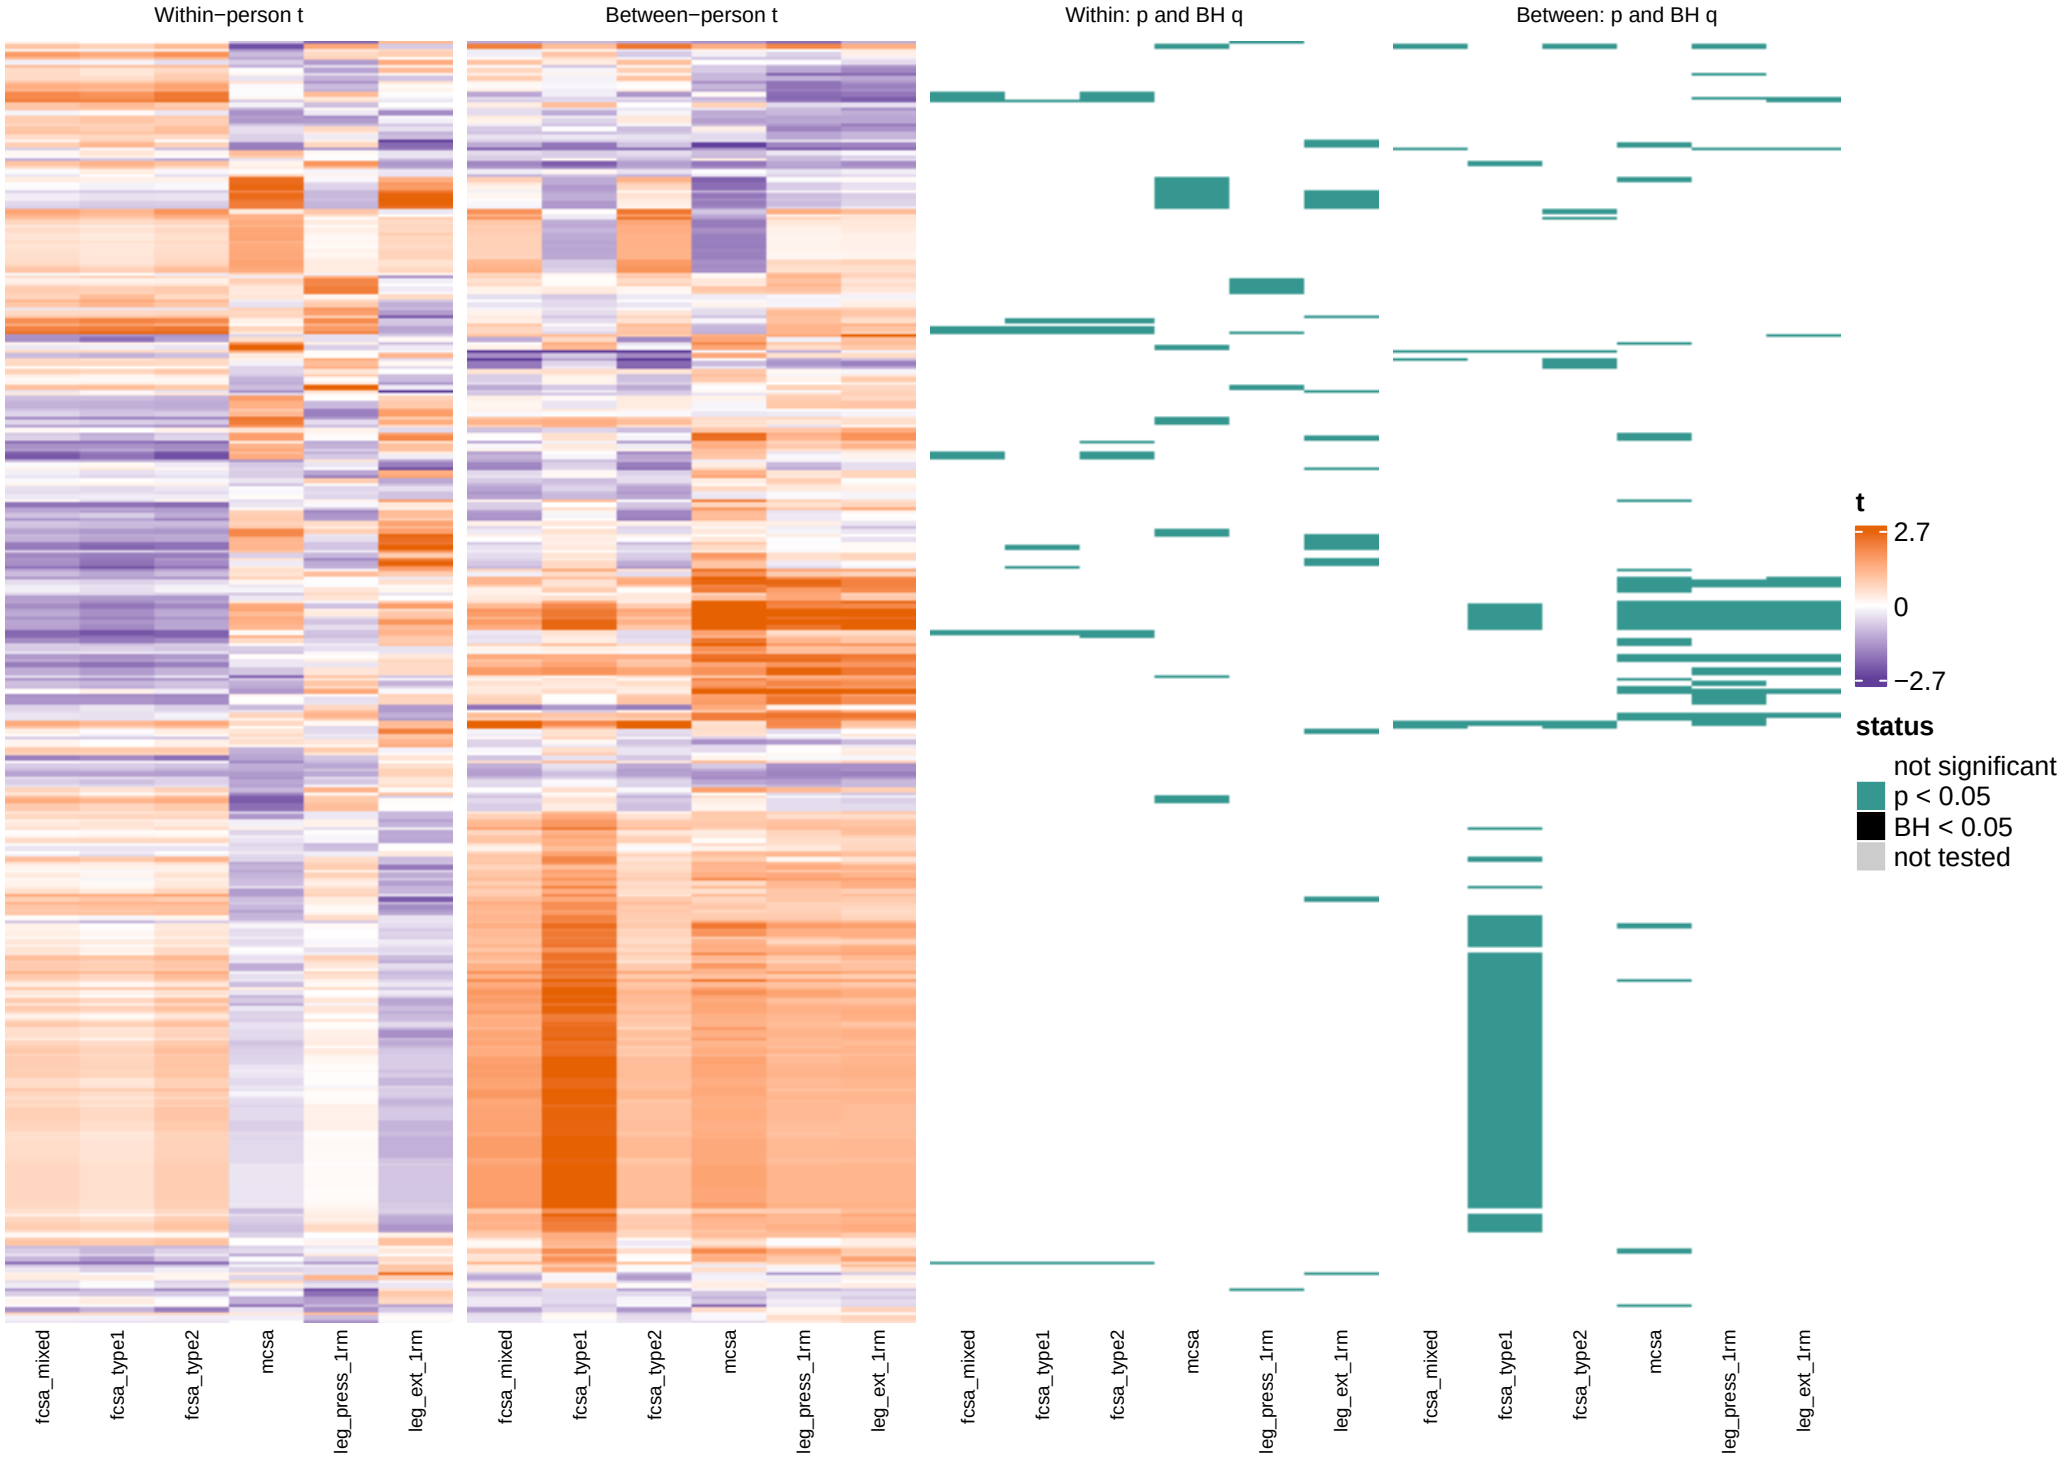


All 328 sets, one row each. Moderated t of the within and between terms, abundance ~ timepoint + between + within, subject blocked. Colours stop at the 99th percentile of |t|, 2.7. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/set_trait_associations.xlsx, model.

Change score overview, training window: Reactome

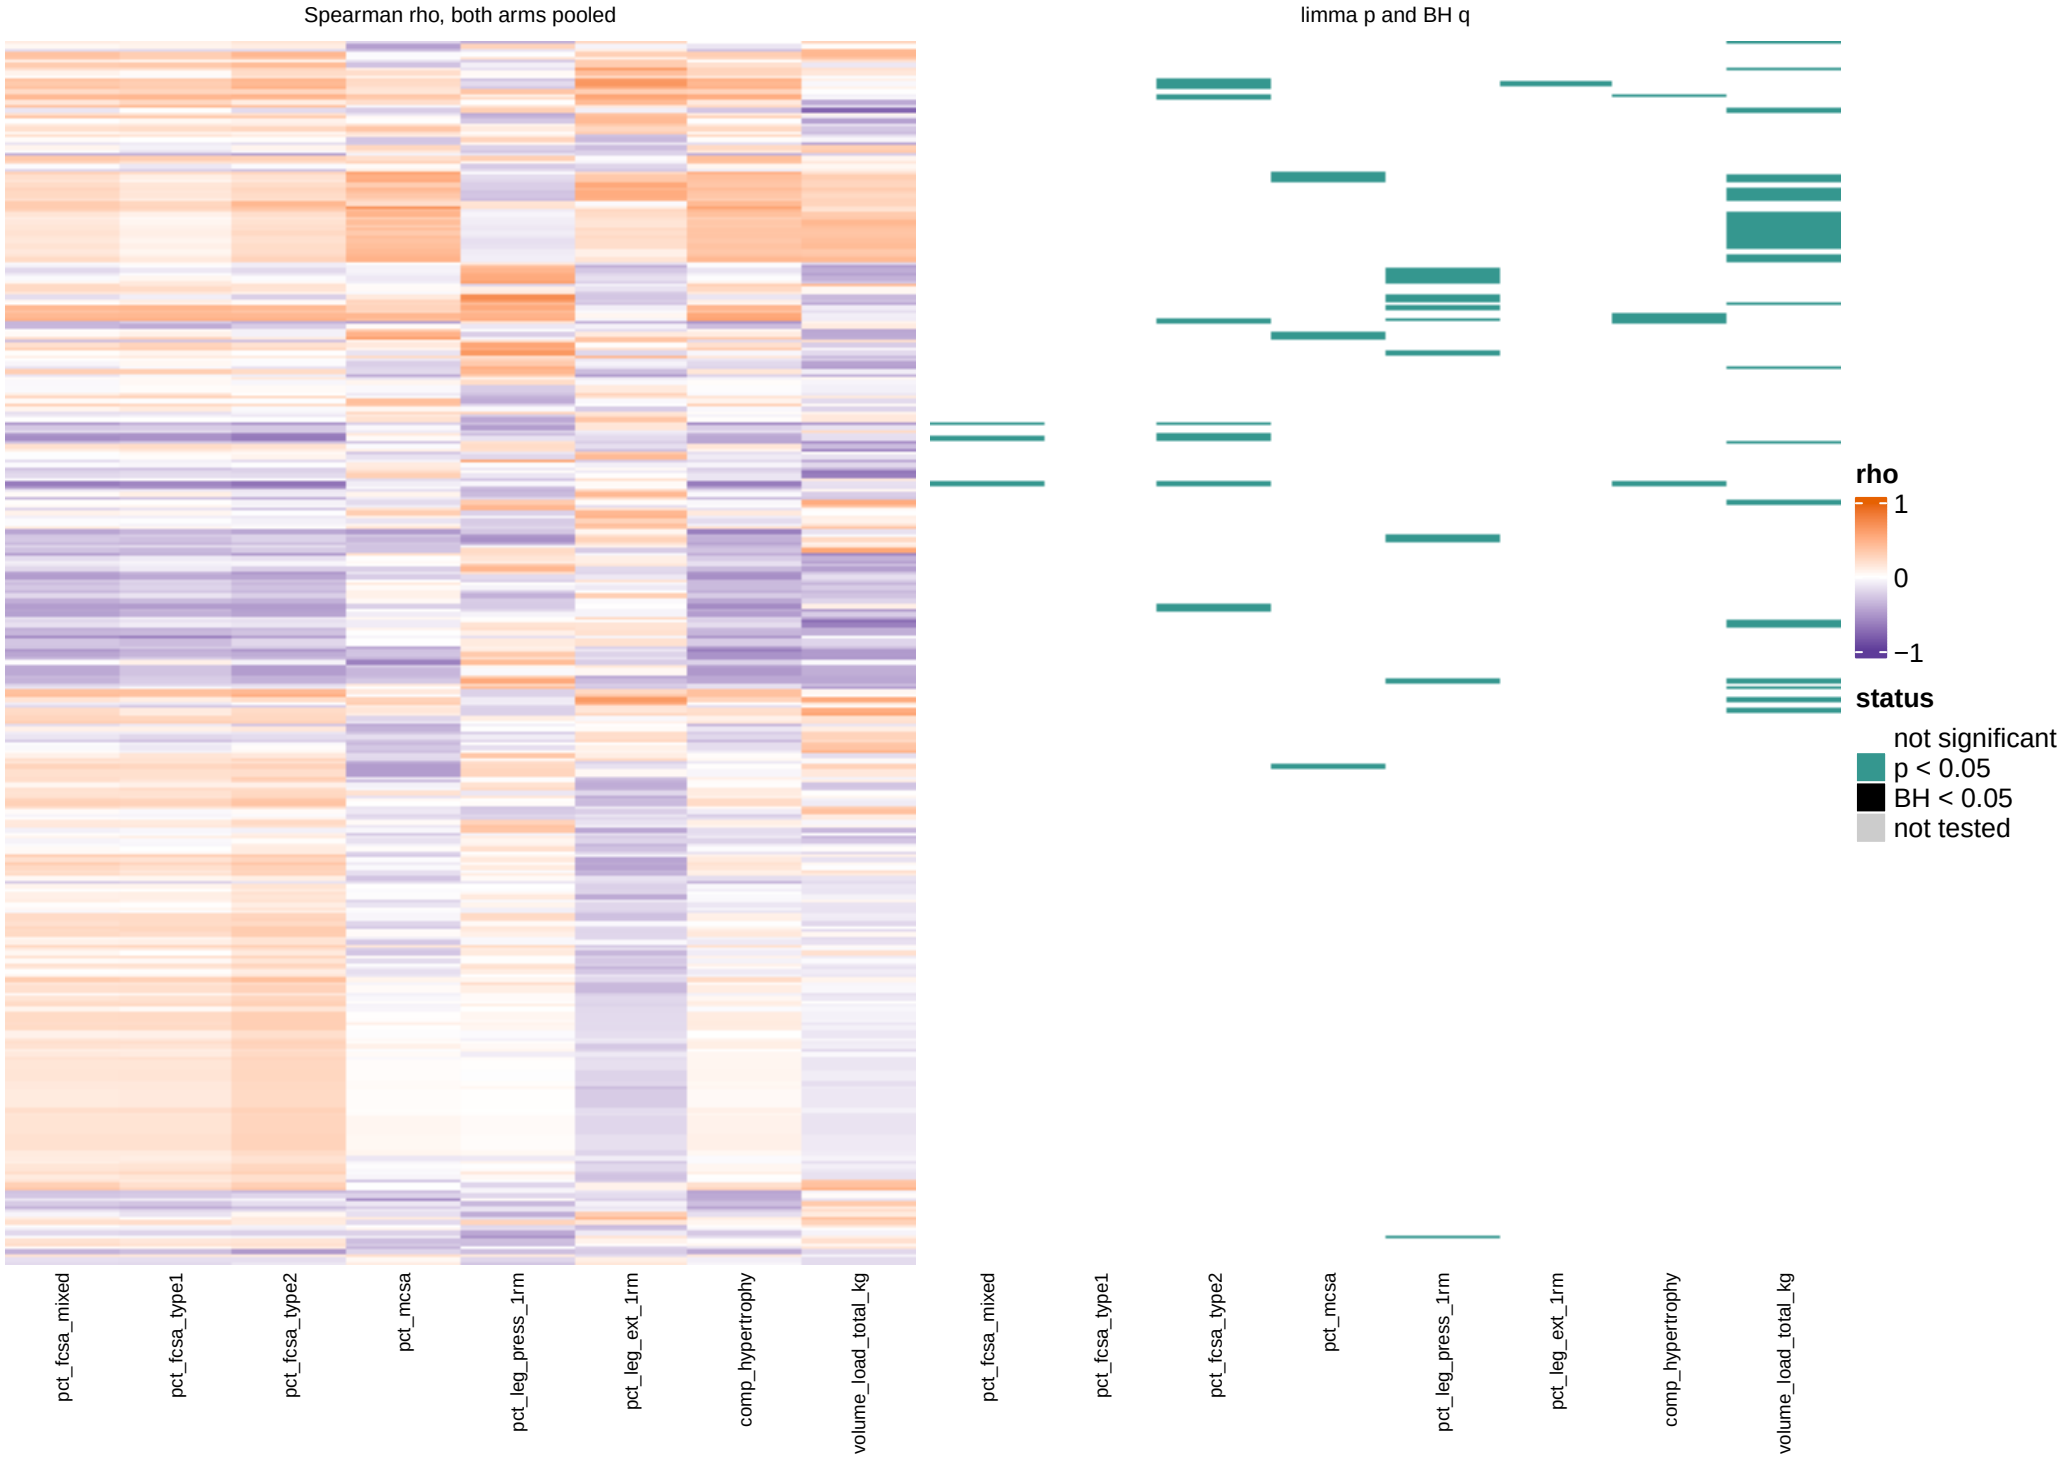


All 328 sets, one row each. Spearman rho between the singscore (change, T1 to T2) and each trait; status from limma. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/set_trait_associations.xlsx, change_score.

Change score overview, baseline window: Reactome

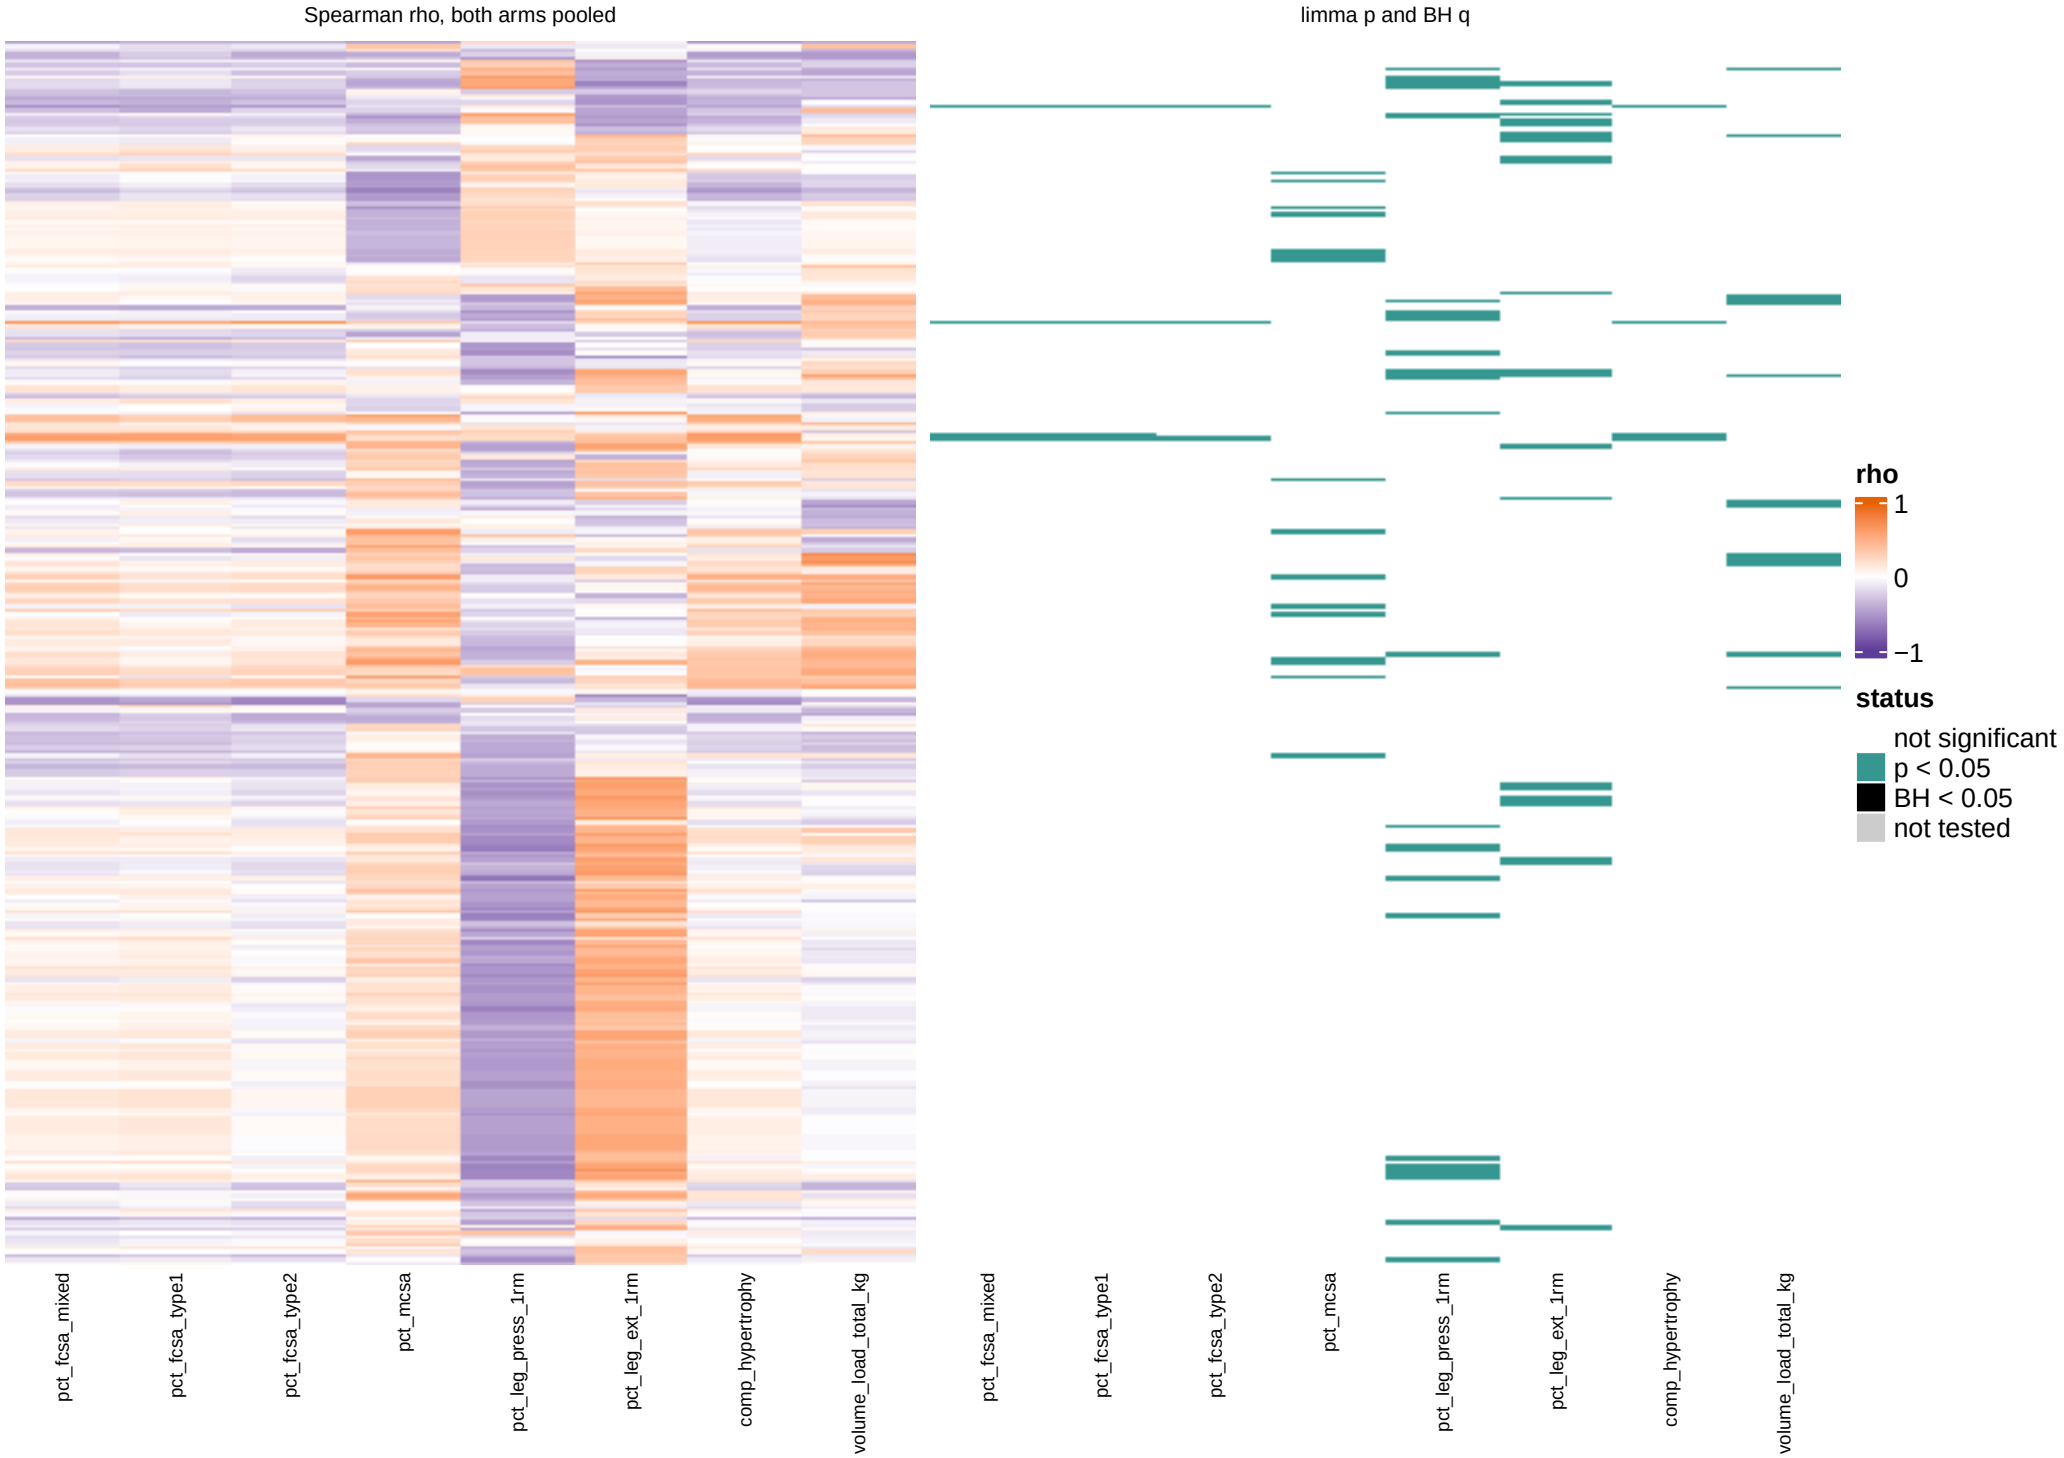


All 328 sets, one row each. Spearman rho between the singscore (T1 level) and each trait; status from limma. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/set_trait_associations.xlsx, change_score.

Change score overview, acute window: Reactome

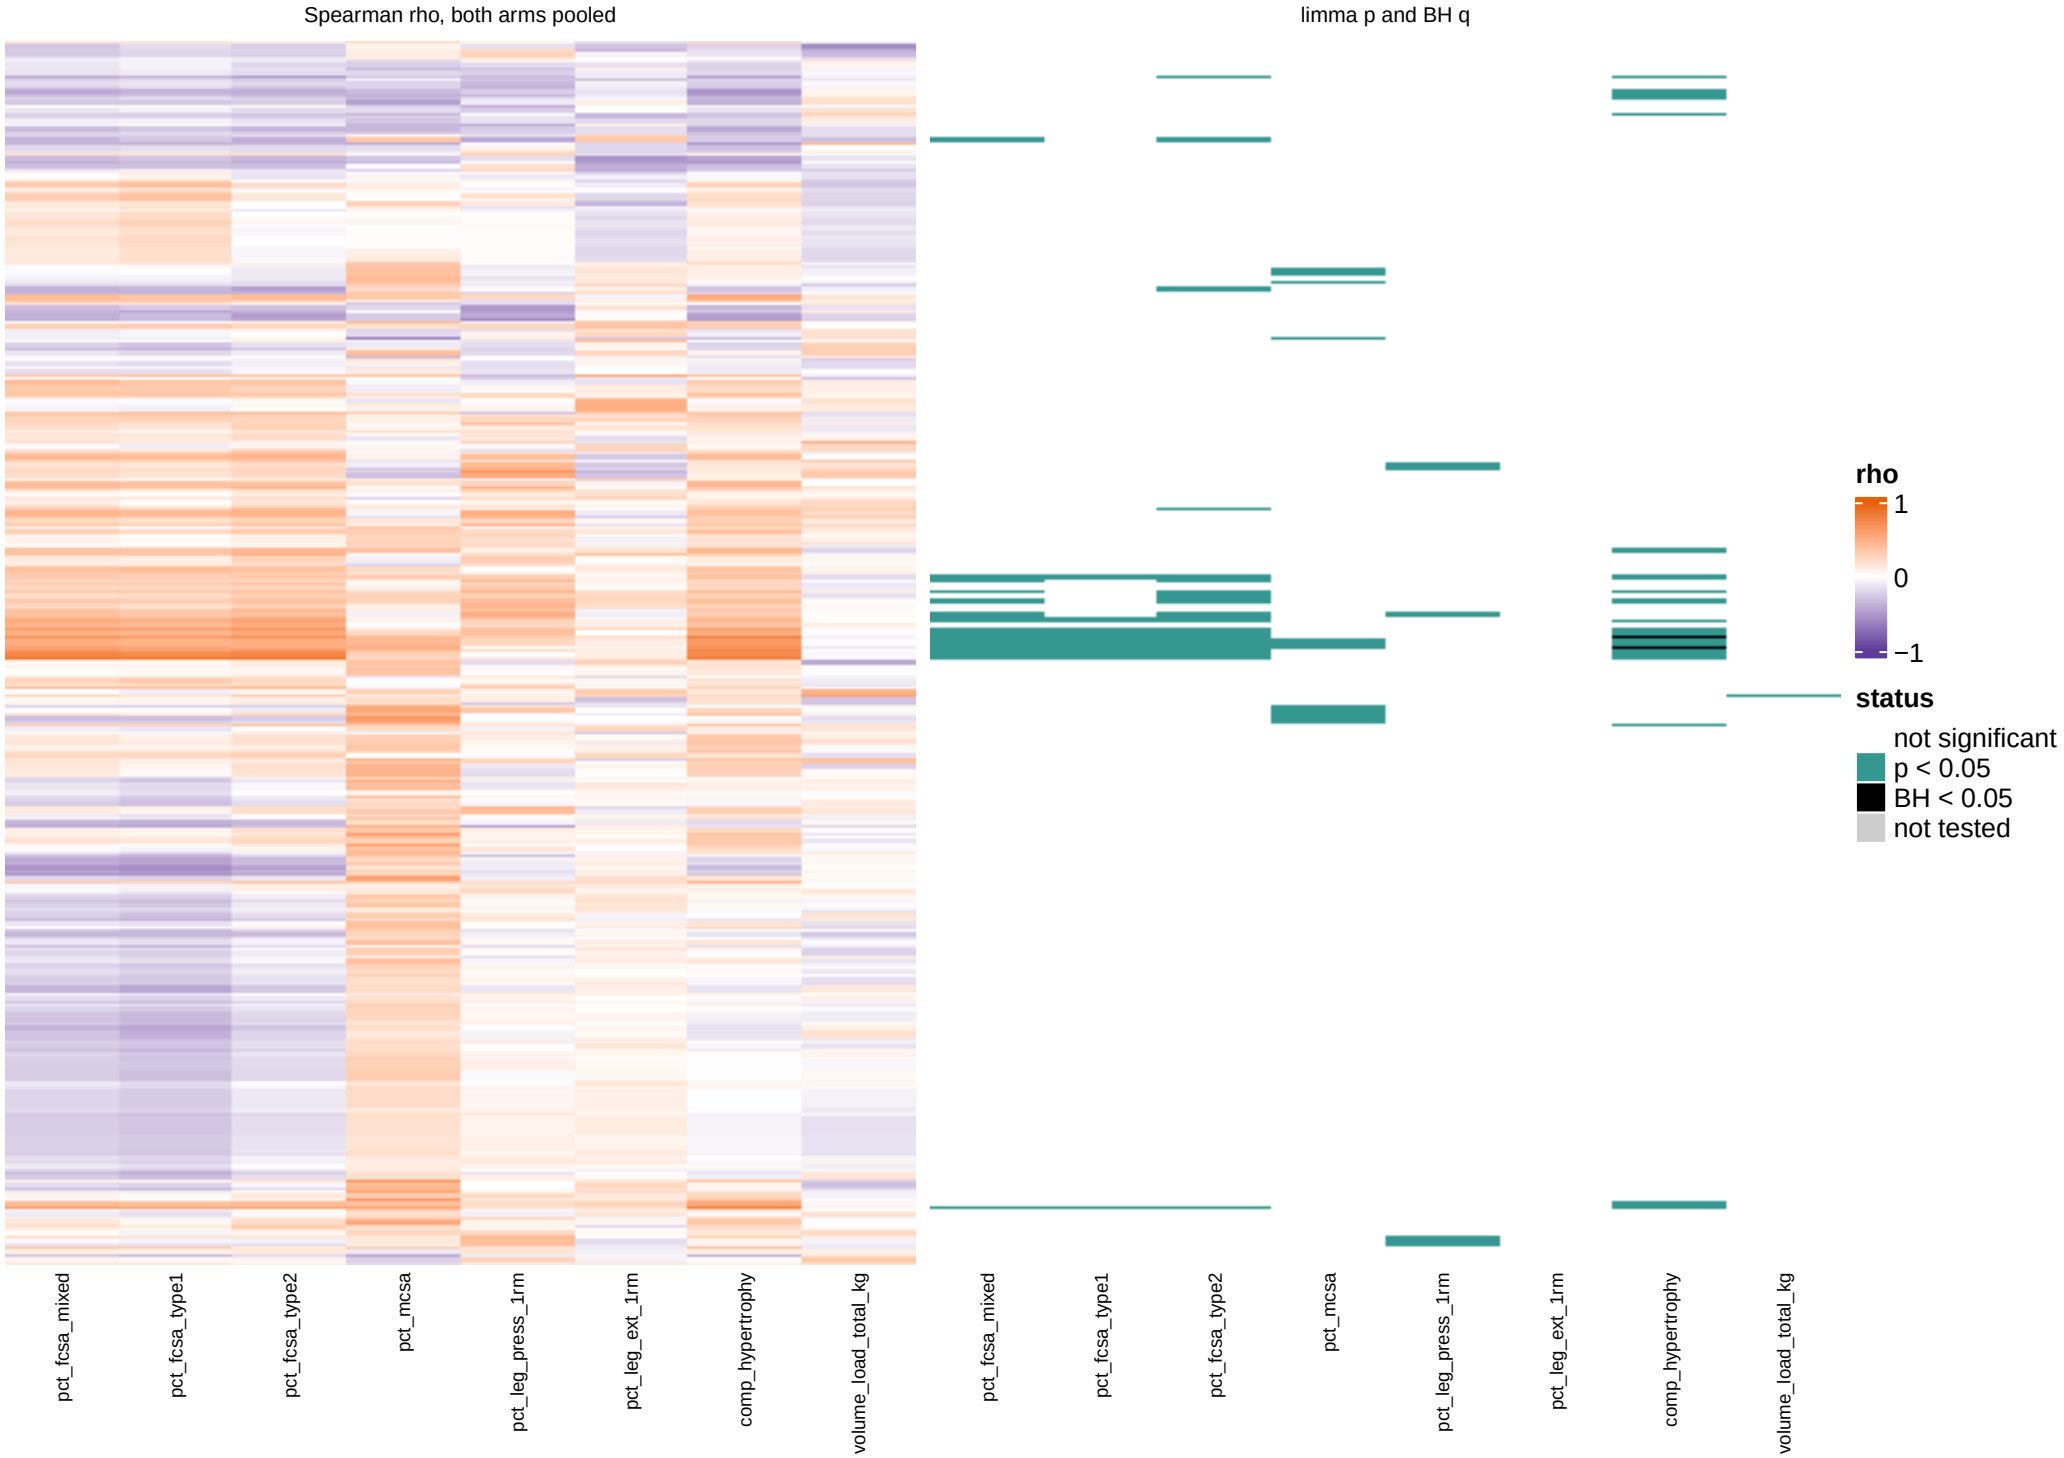


All 328 sets, one row each. Spearman rho between the singscore (change, T2 to T3) and each trait; status from limma. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/set_trait_associations.xlsx, change_score.

Change score overview, baseline_level window: Reactome

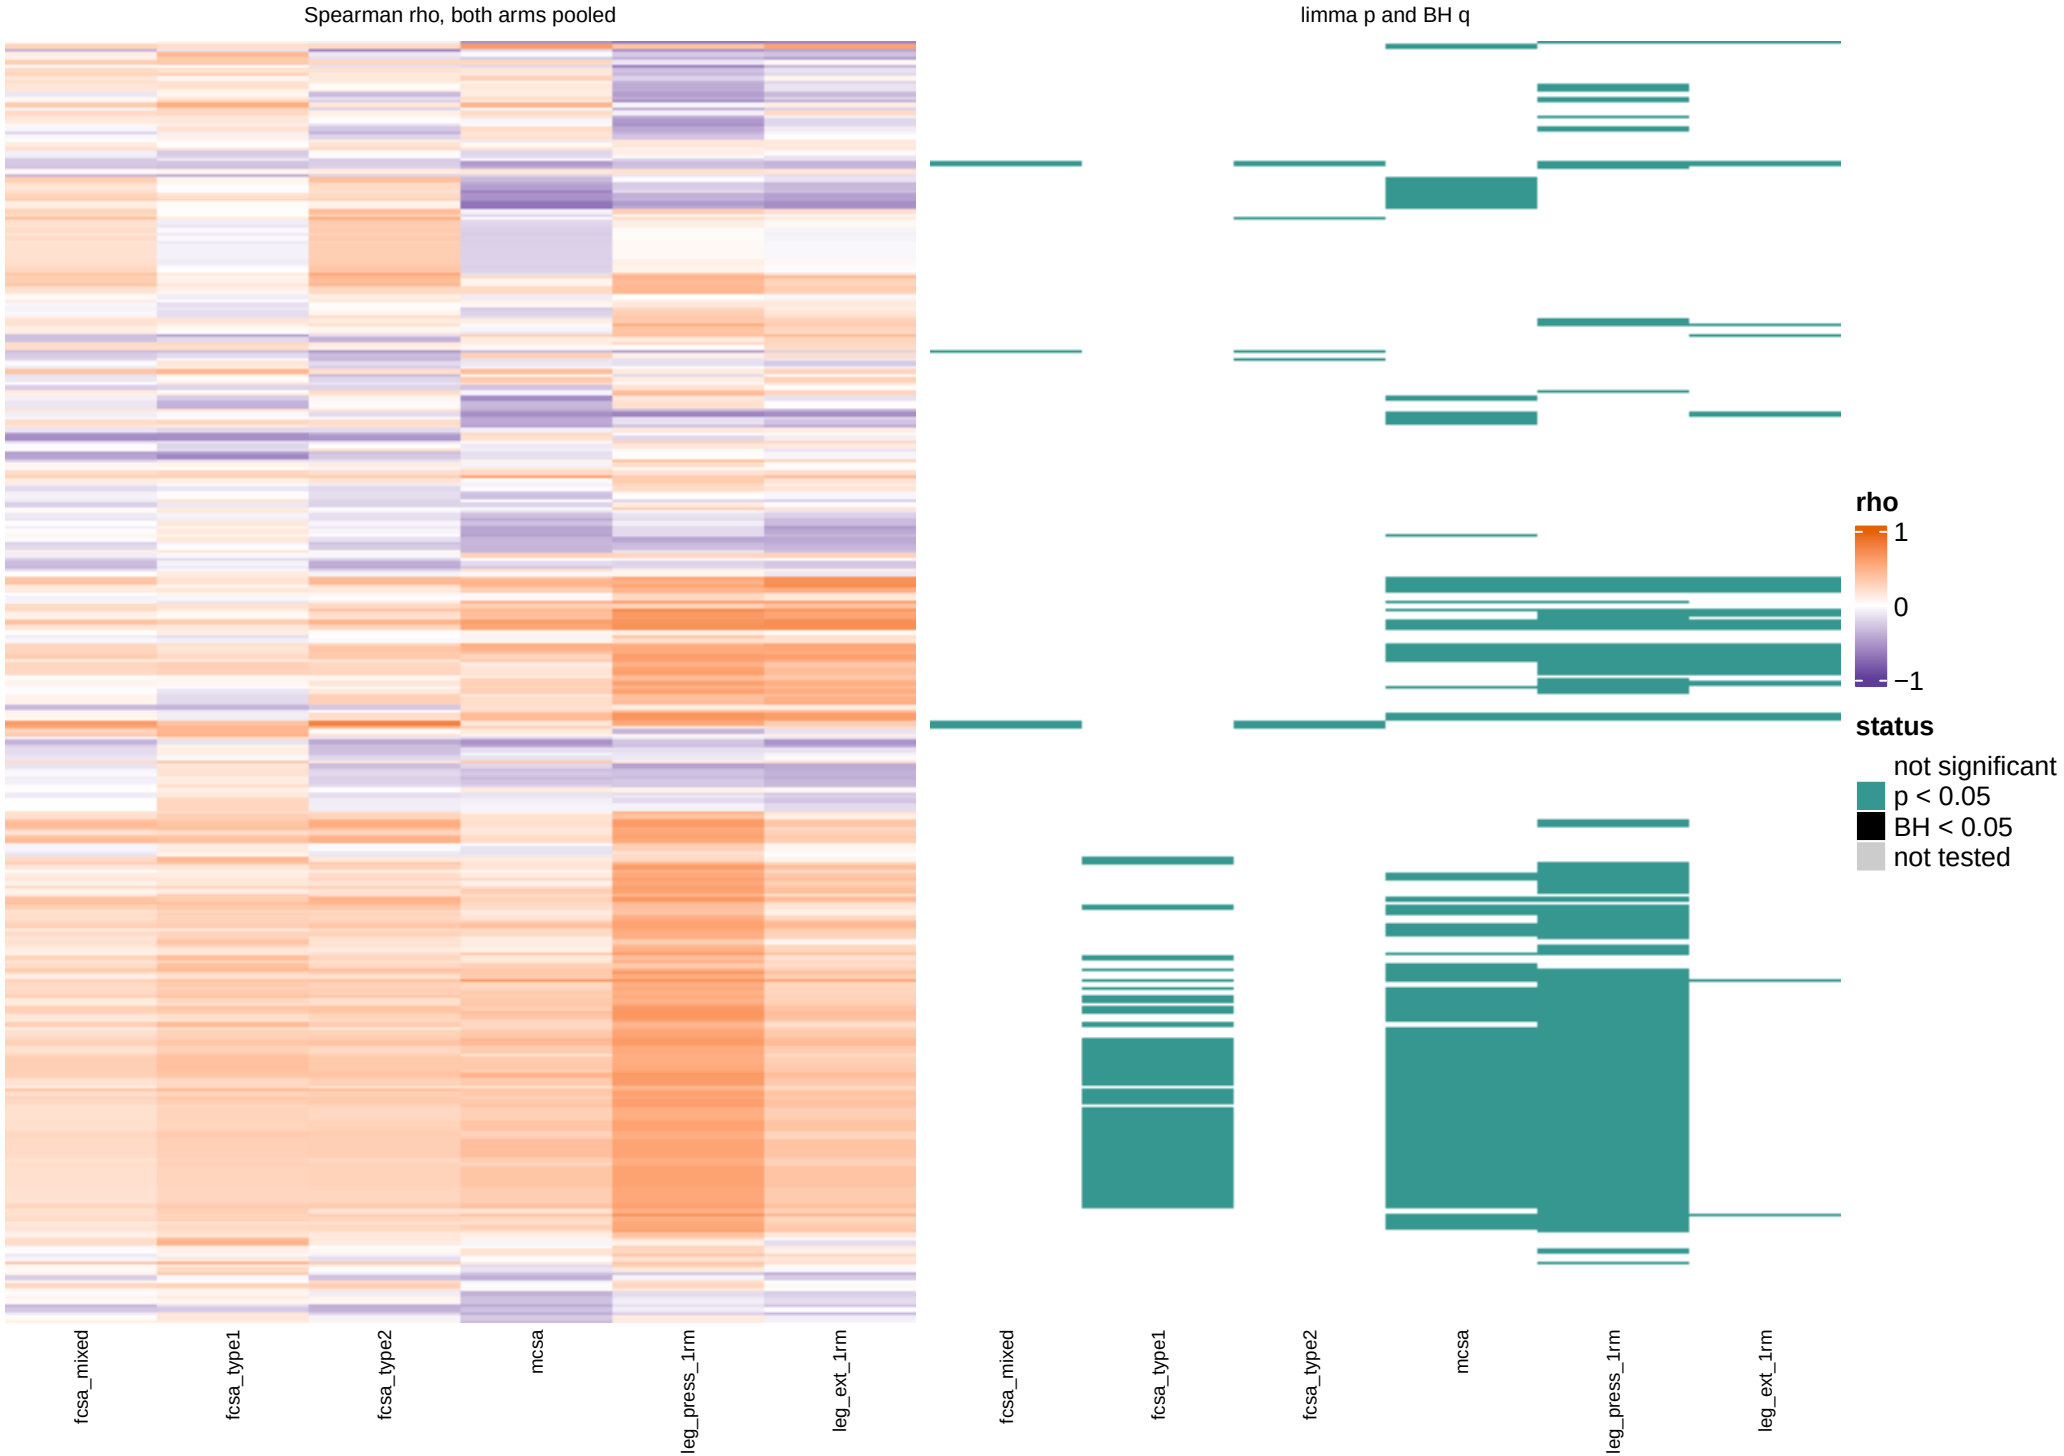


All 328 sets, one row each. Spearman rho between the singscore (T1 level) and each trait; status from limma. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/set_trait_associations.xlsx, change_score.

Change score overview, post_level window: Reactome

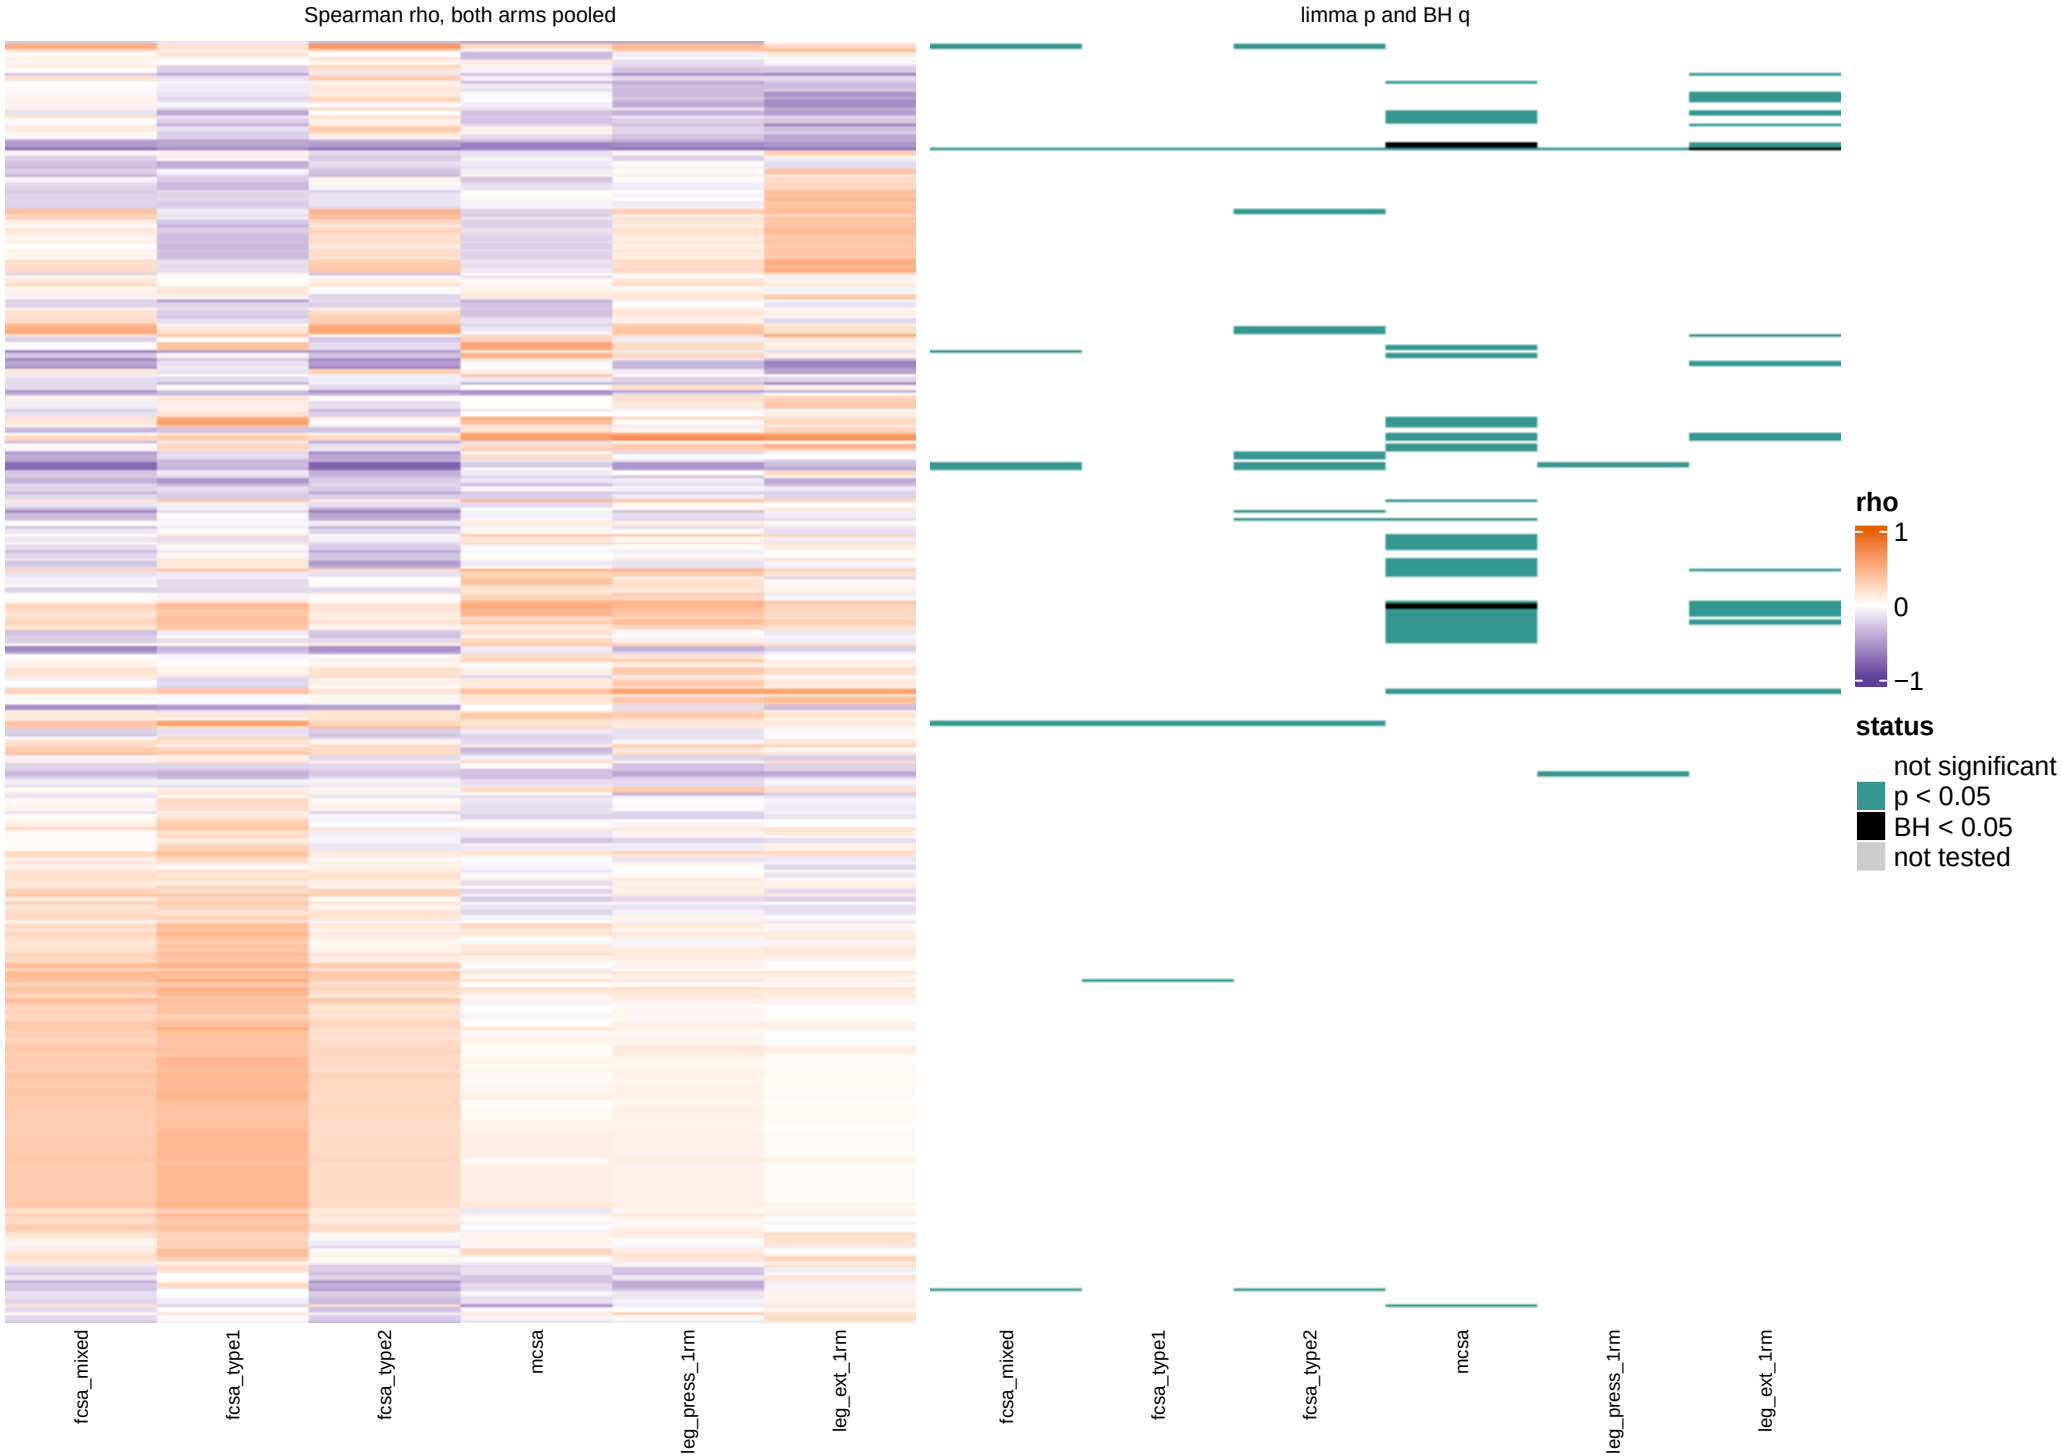


All 328 sets, one row each. Spearman rho between the singscore (T2 level) and each trait; status from limma. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/set_trait_associations.xlsx, change_score.

Change score overview, post_bout_level window: Reactome

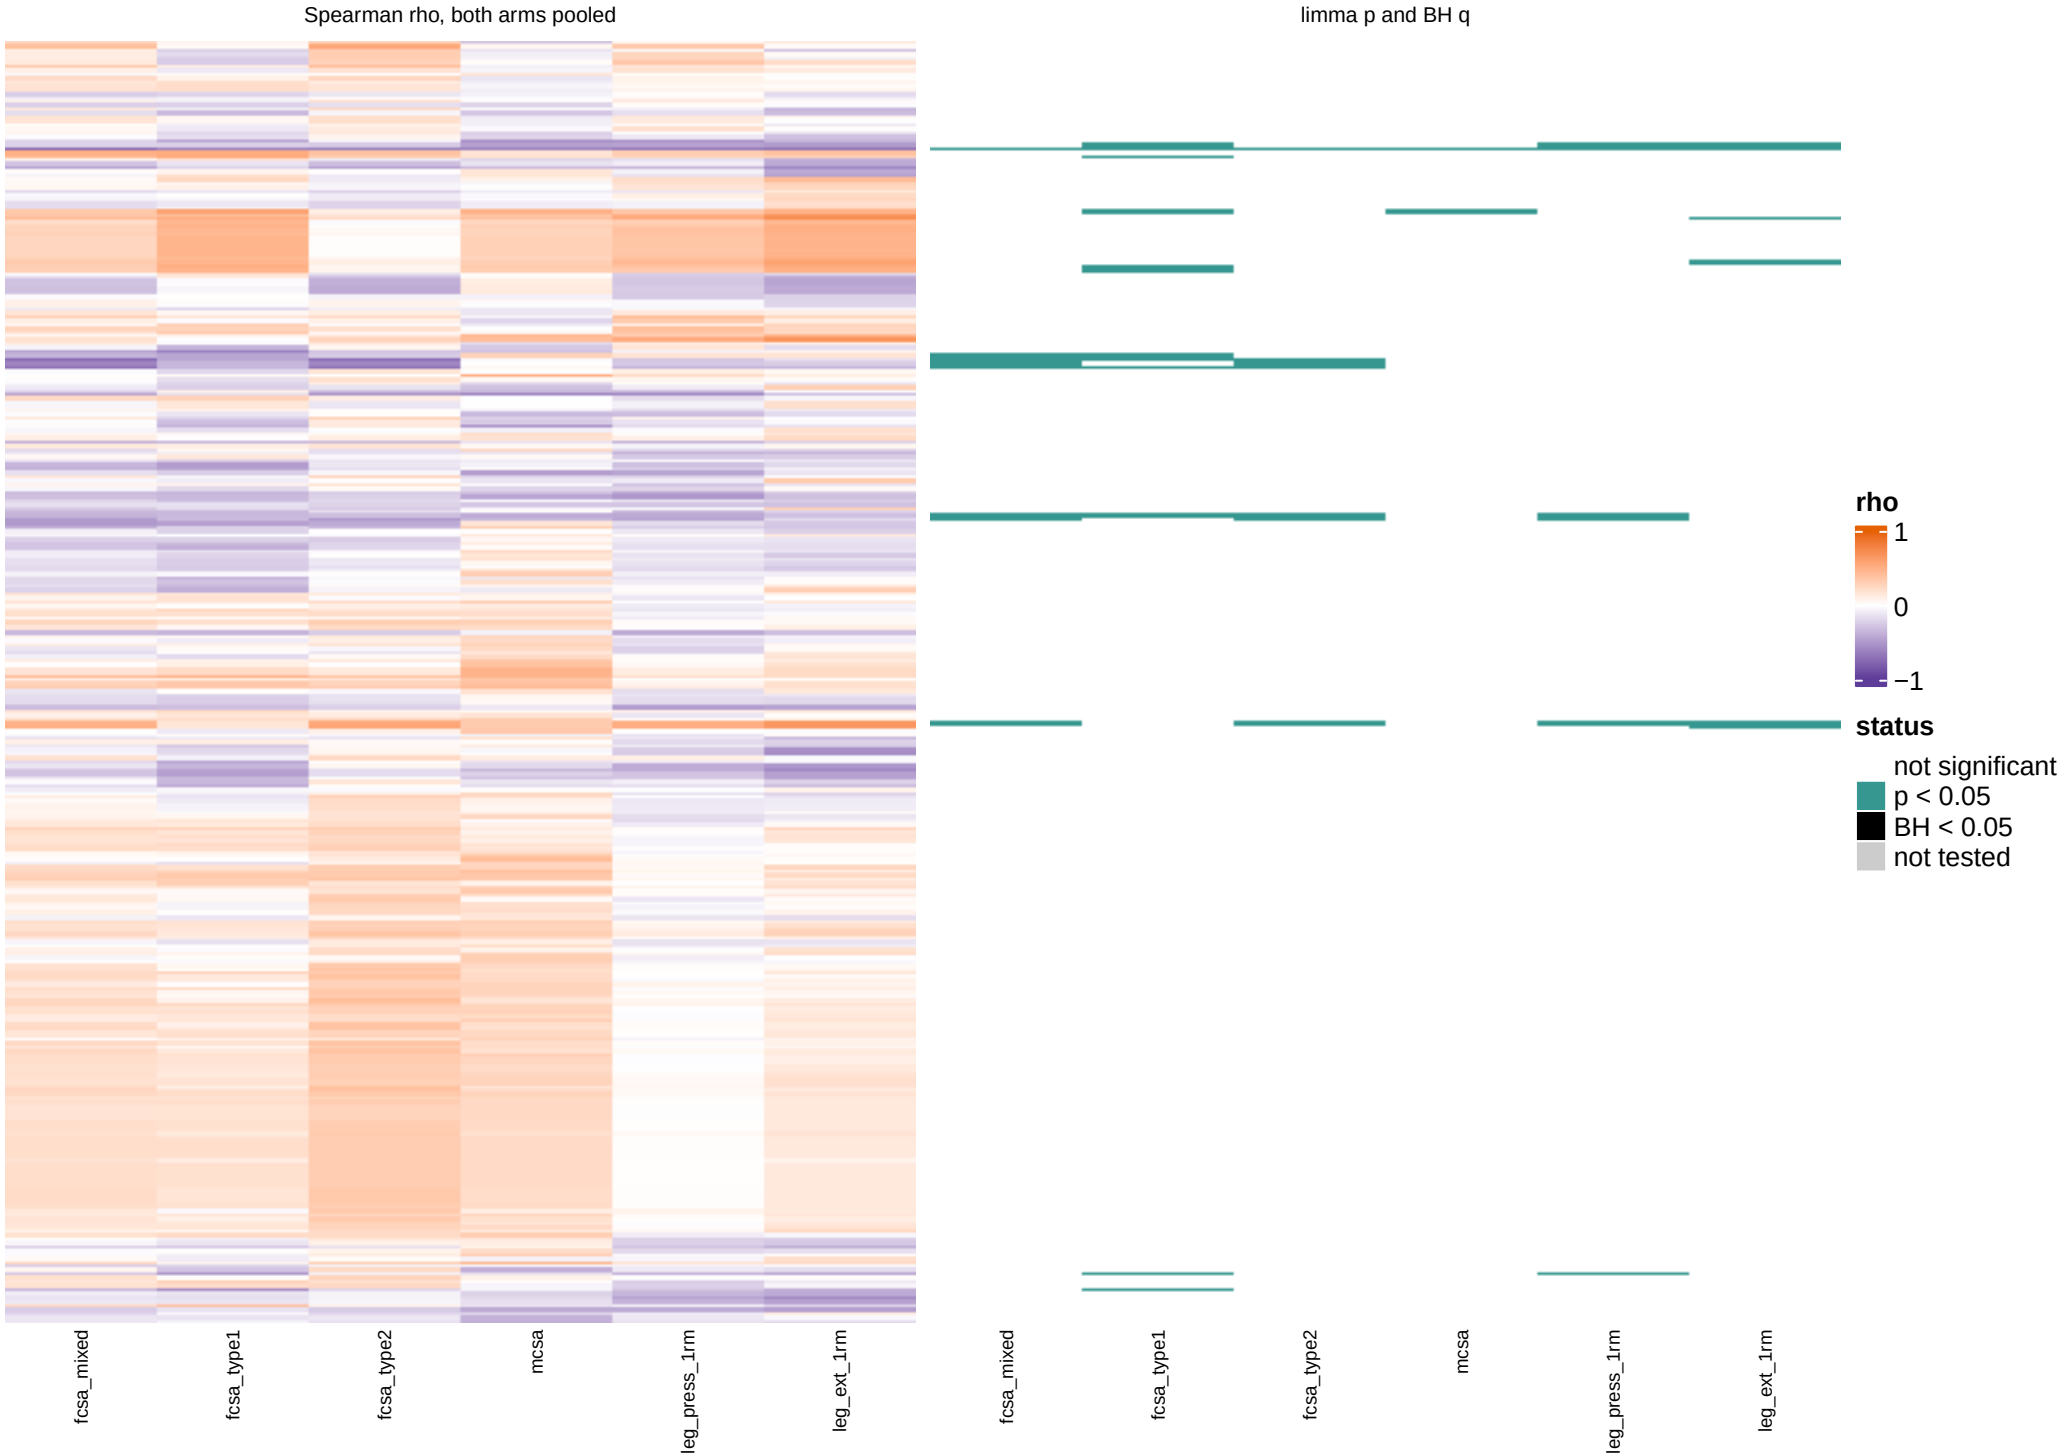


All 328 sets, one row each. Spearman rho between the singscore (T3 level) and each trait; status from limma. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/set_trait_associations.xlsx, change_score.

Sample model overview: KEGG_Legacy

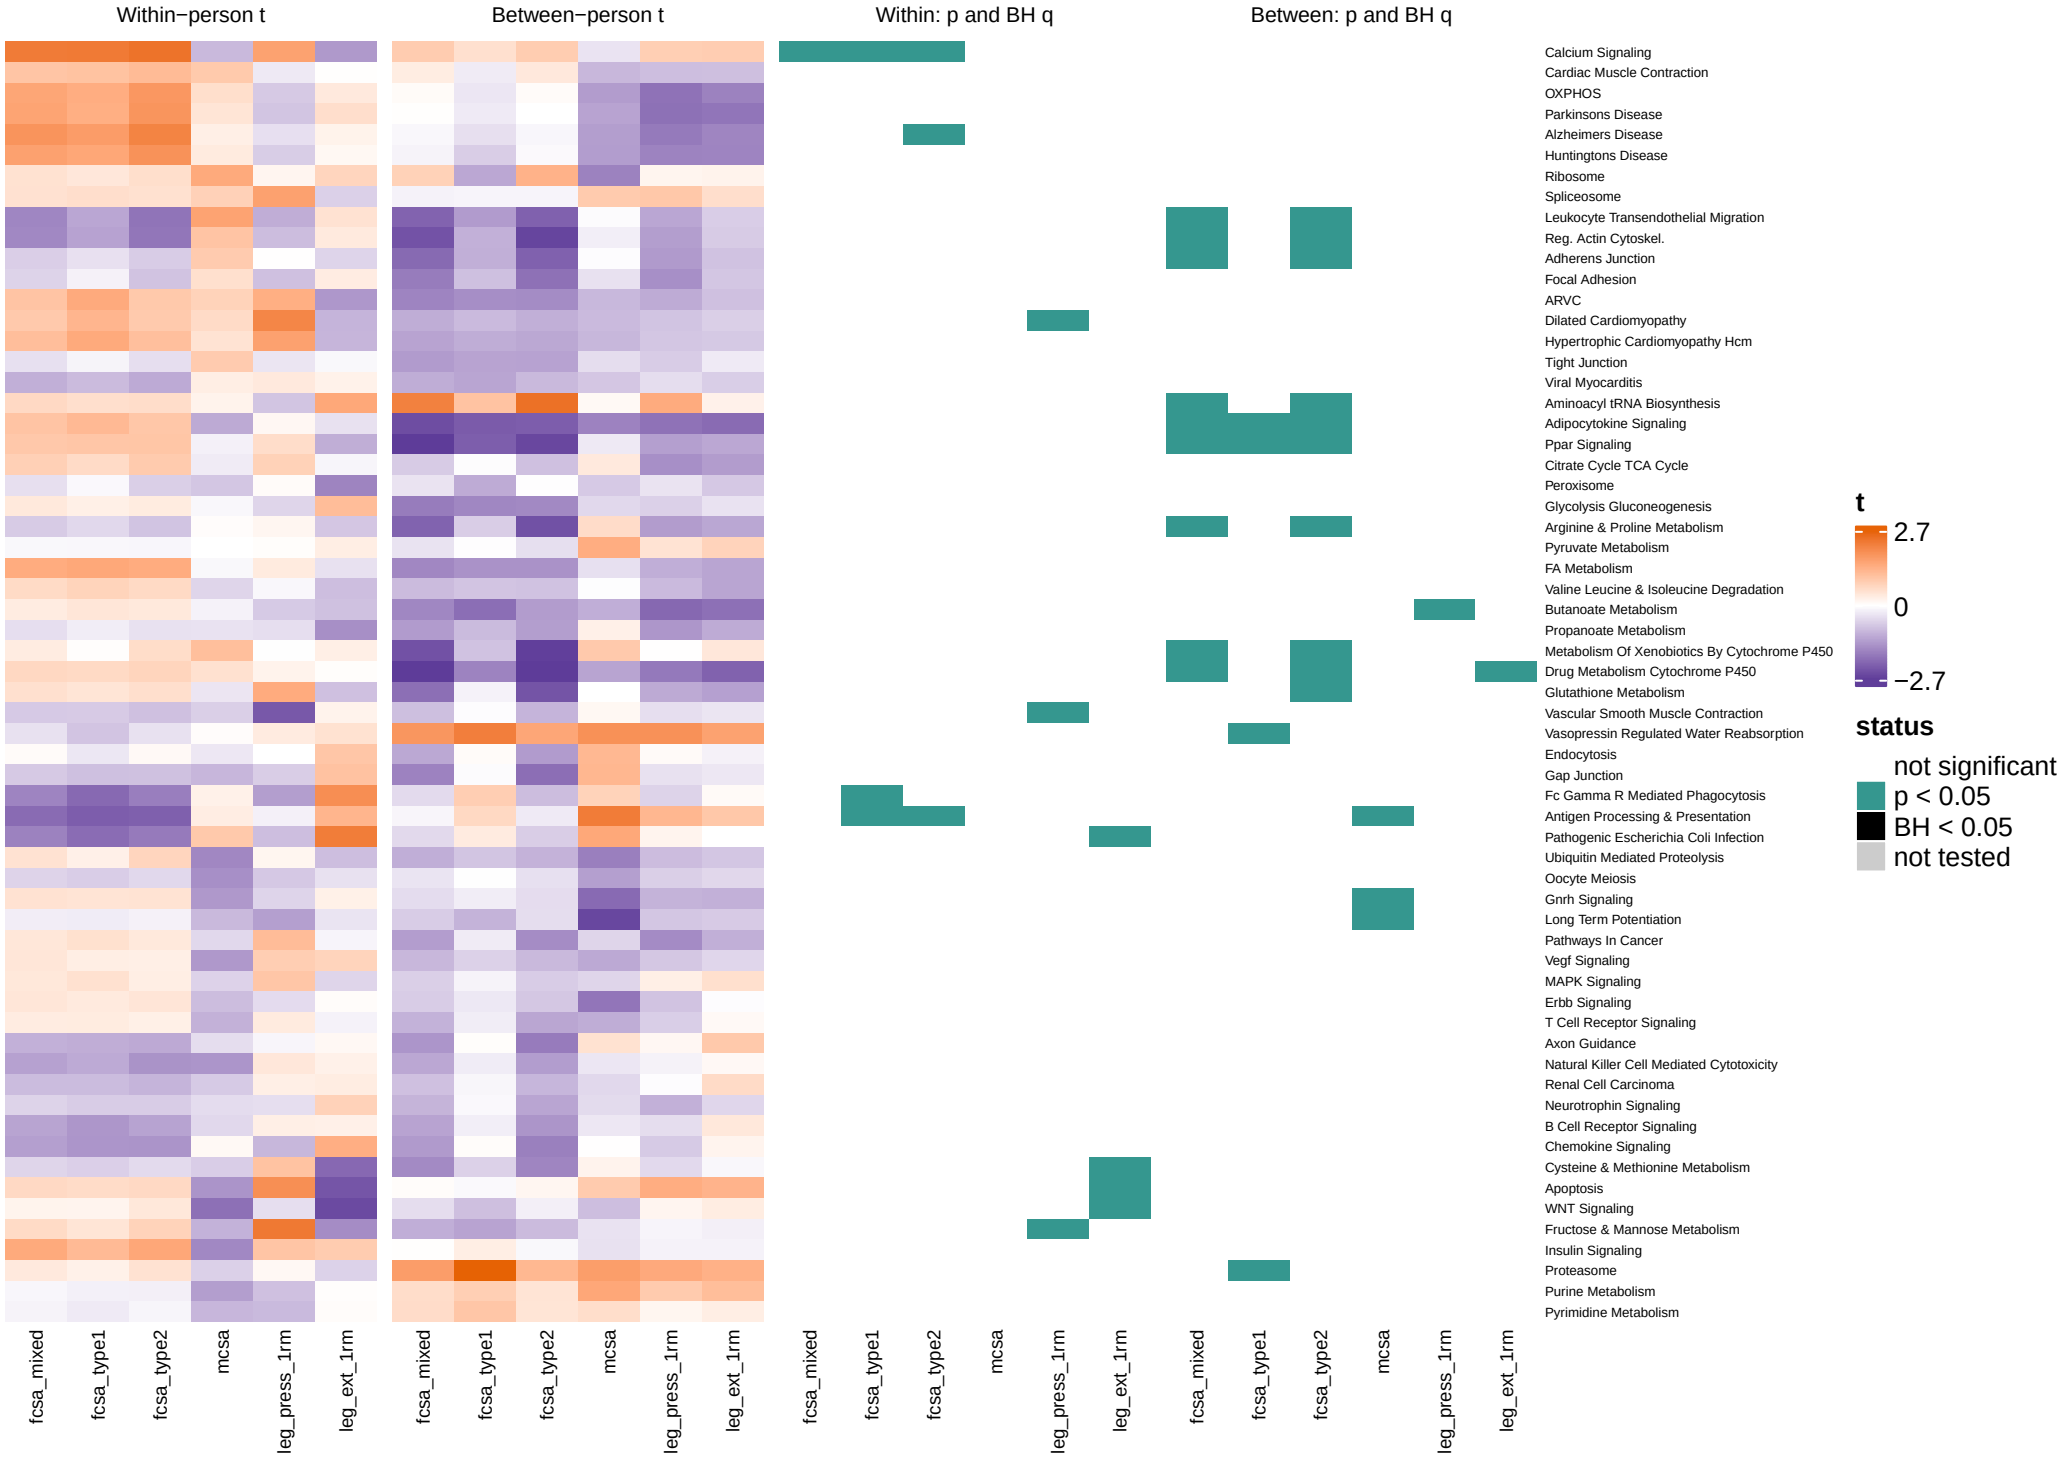


All 62 sets, one row each. Moderated t of the within and between terms, abundance ~ timepoint + between + within, subject blocked. Colours stop at the 99th percentile of |t|, 2.7. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/set_trait_associations.xlsx, model.

Change score overview, training window: KEGG_Legacy

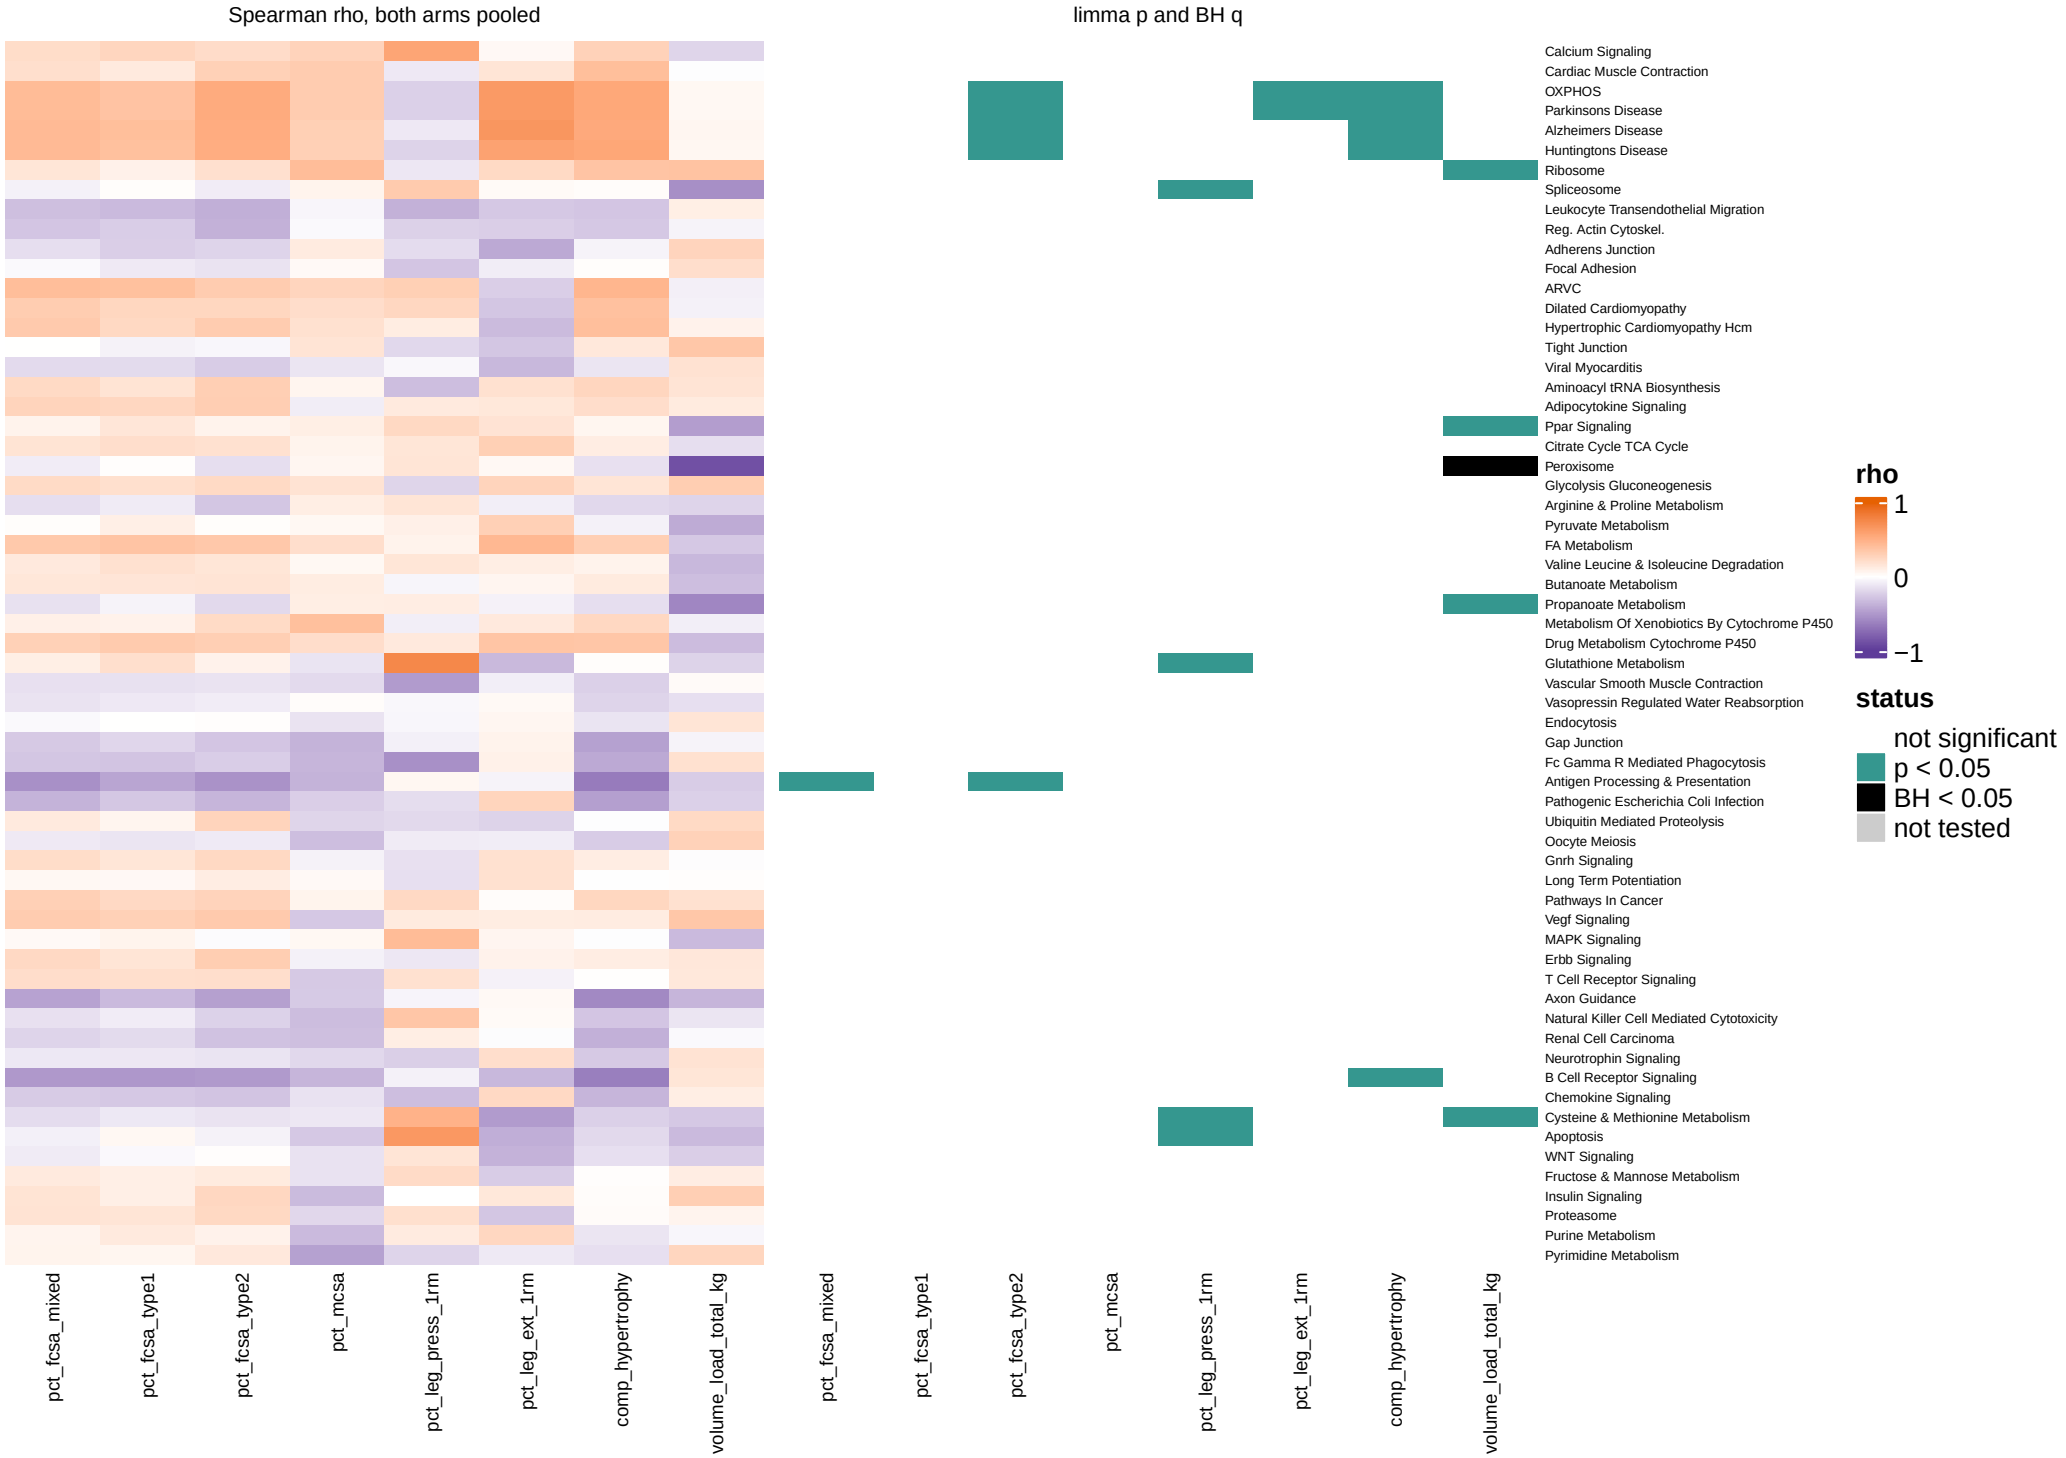

All 62 sets, one row each. Spearman rho between the singscore (change, T1 to T2) and each trait; status from limma. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/set_trait_associations.xlsx, change_score.

Change score overview, baseline window: KEGG_Legacy

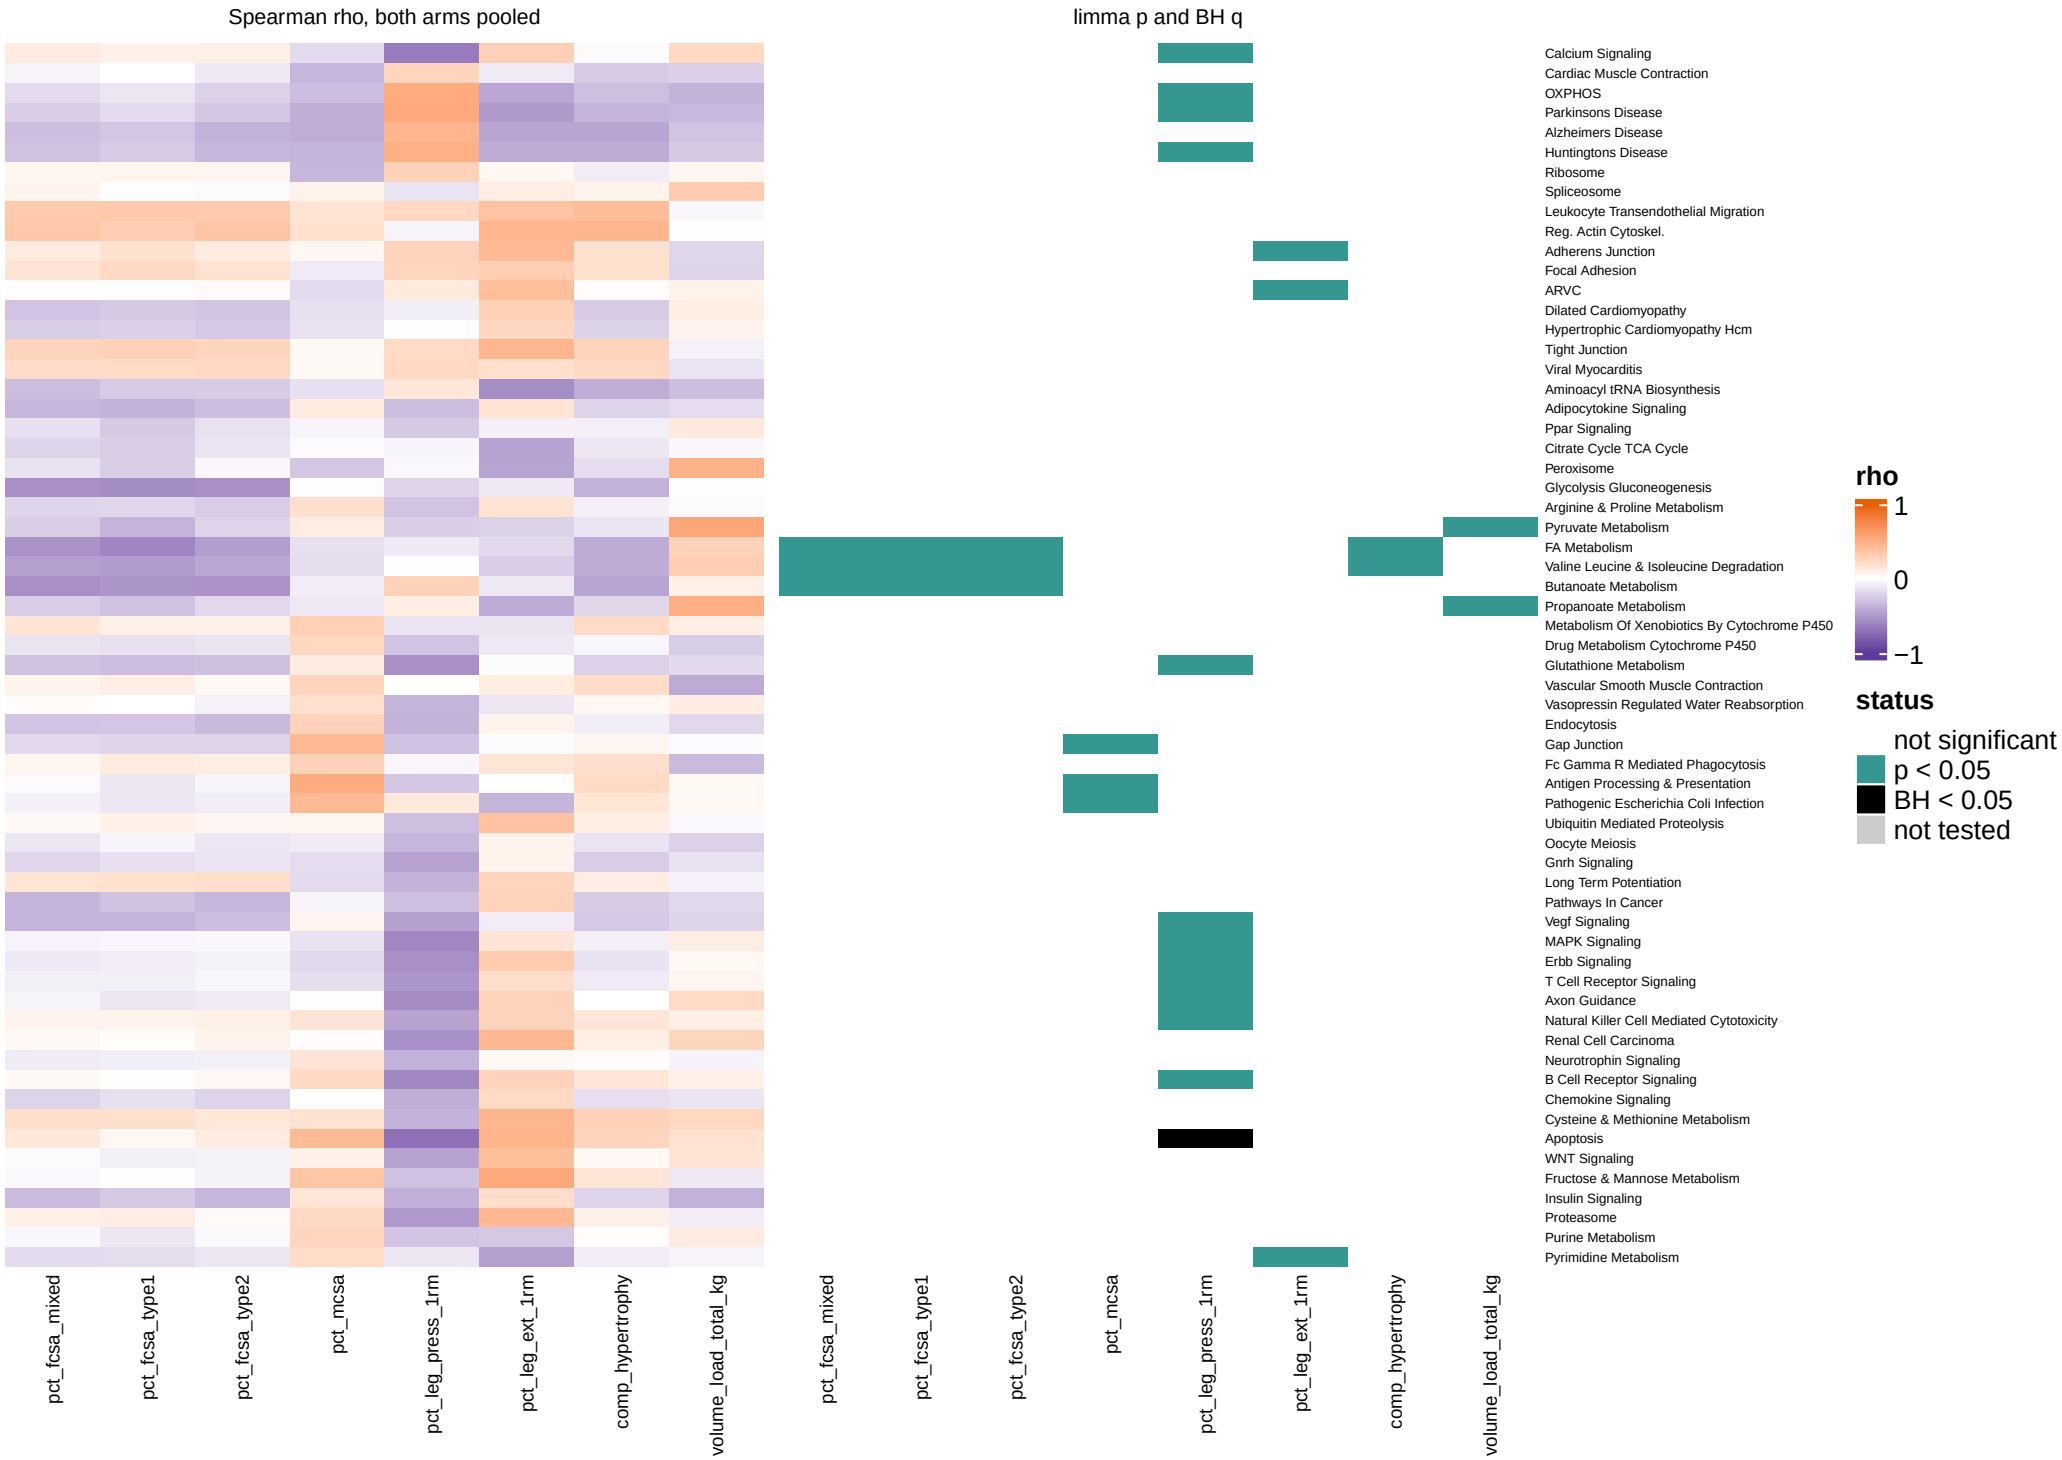


All 62 sets, one row each. Spearman rho between the singscore (T1 level) and each trait; status from limma. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/set_trait_associations.xlsx, change_score.

Change score overview, acute window: KEGG_Legacy




All 62 sets, one row each. Spearman rho between the singscore (change, T2 to T3) and each trait; status from limma. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/set_trait_associations.xlsx, change_score.

Change score overview, baseline_level window: KEGG_Legacy

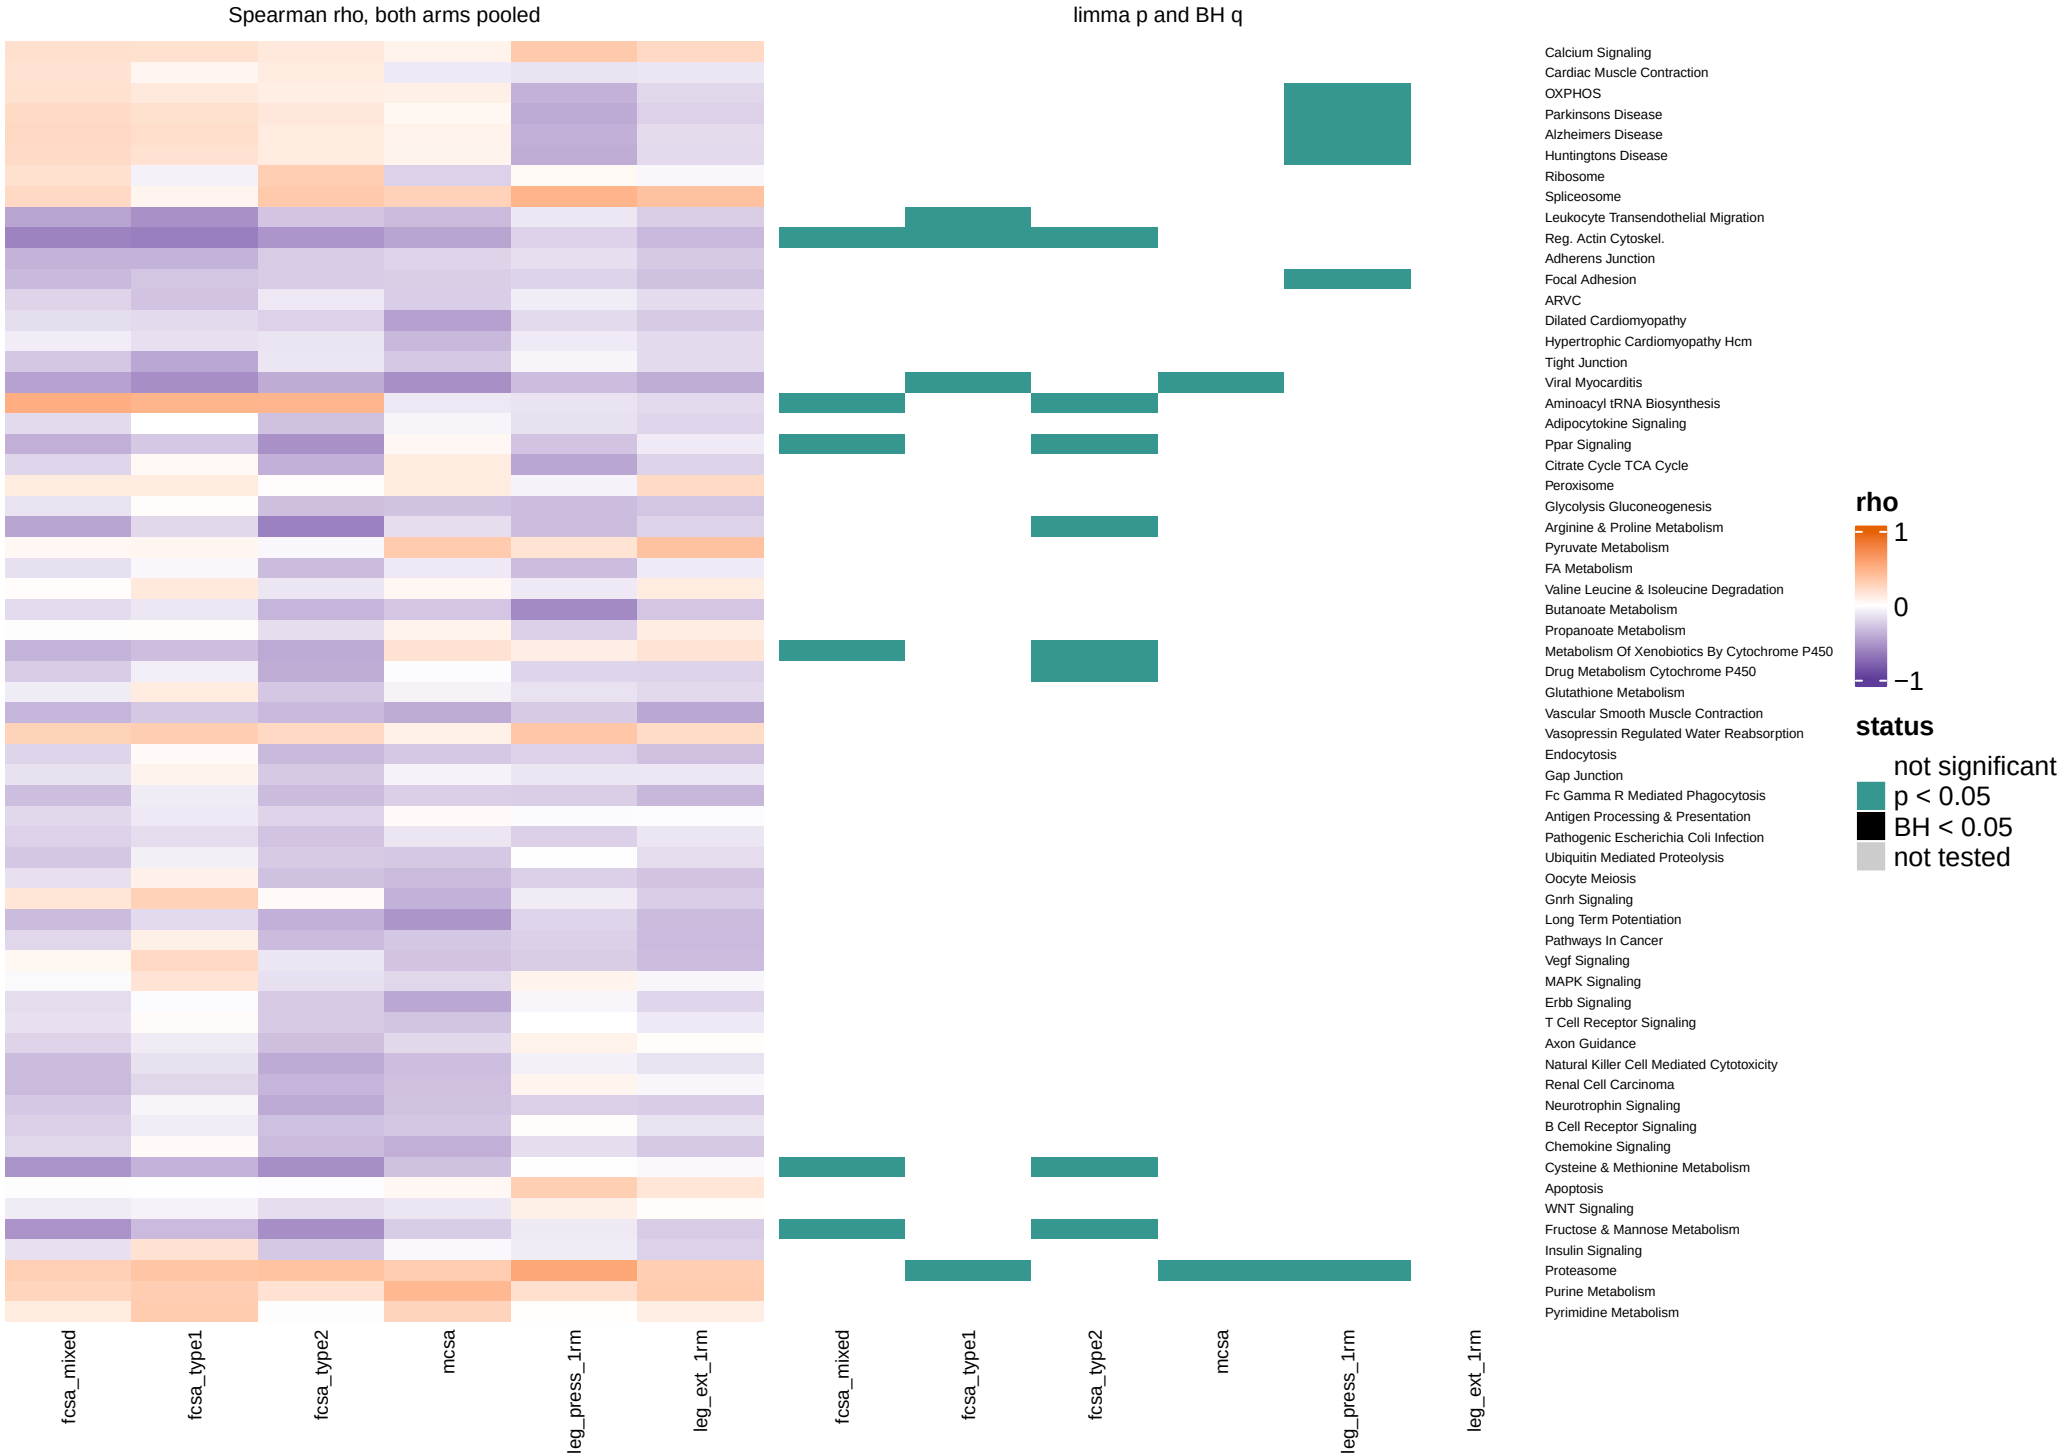


All 62 sets, one row each. Spearman rho between the singscore (T1 level) and each trait; status from limma. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/set_trait_associations.xlsx, change_score.

Change score overview, post_level window: KEGG_Legacy

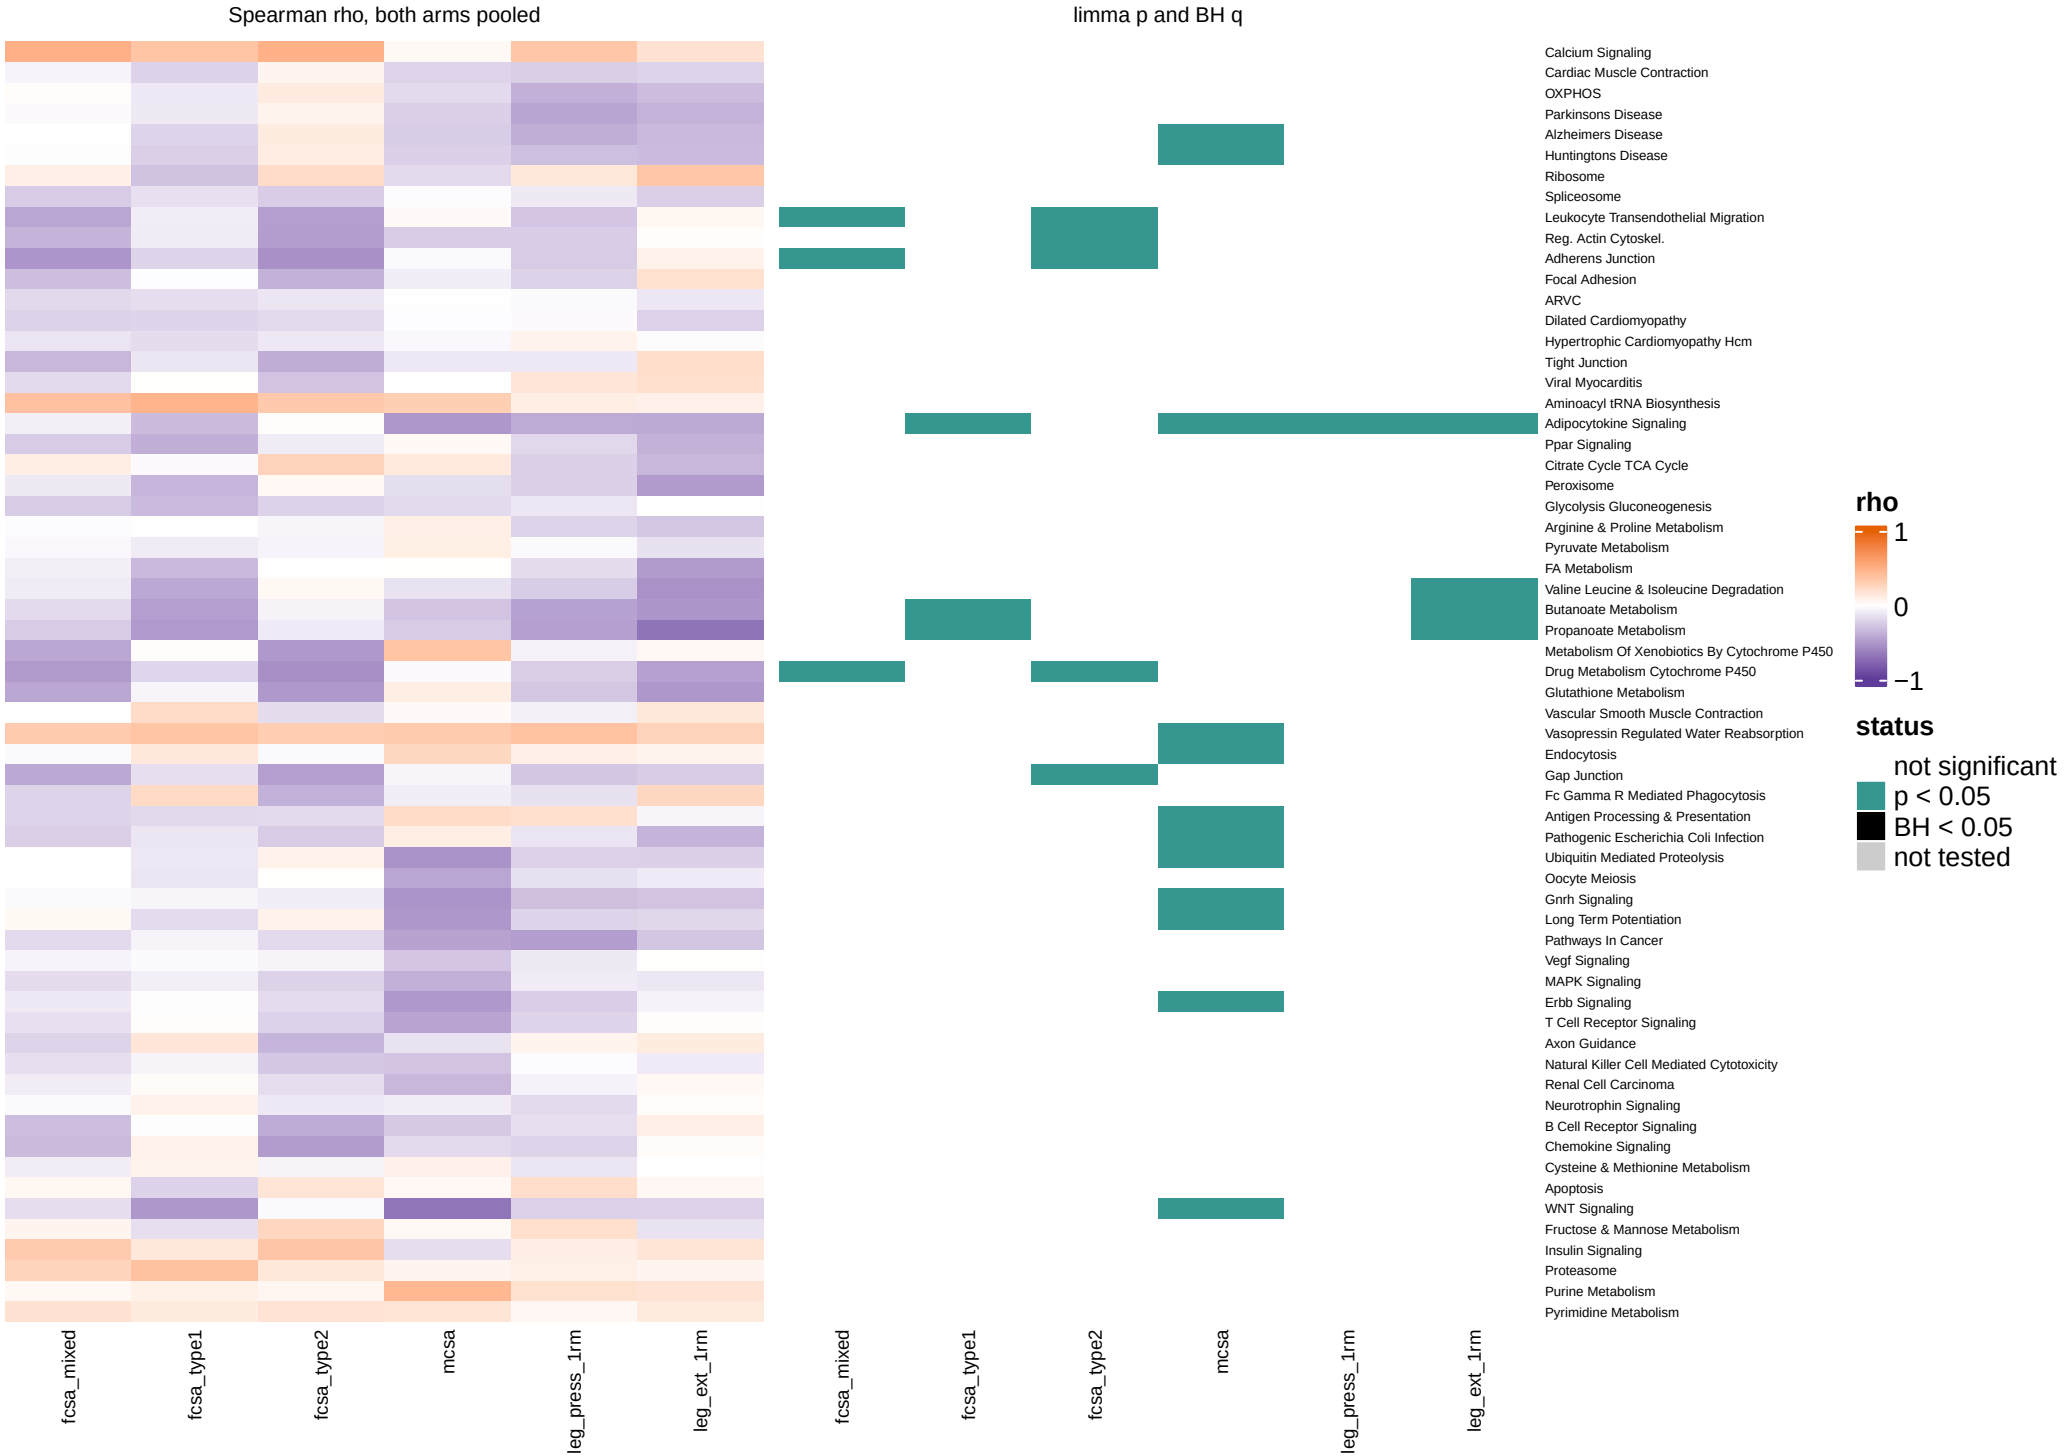


All 62 sets, one row each. Spearman rho between the singscore (T2 level) and each trait; status from limma. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/set_trait_associations.xlsx, change_score.

Change score overview, post_bout_level window: KEGG_Legacy

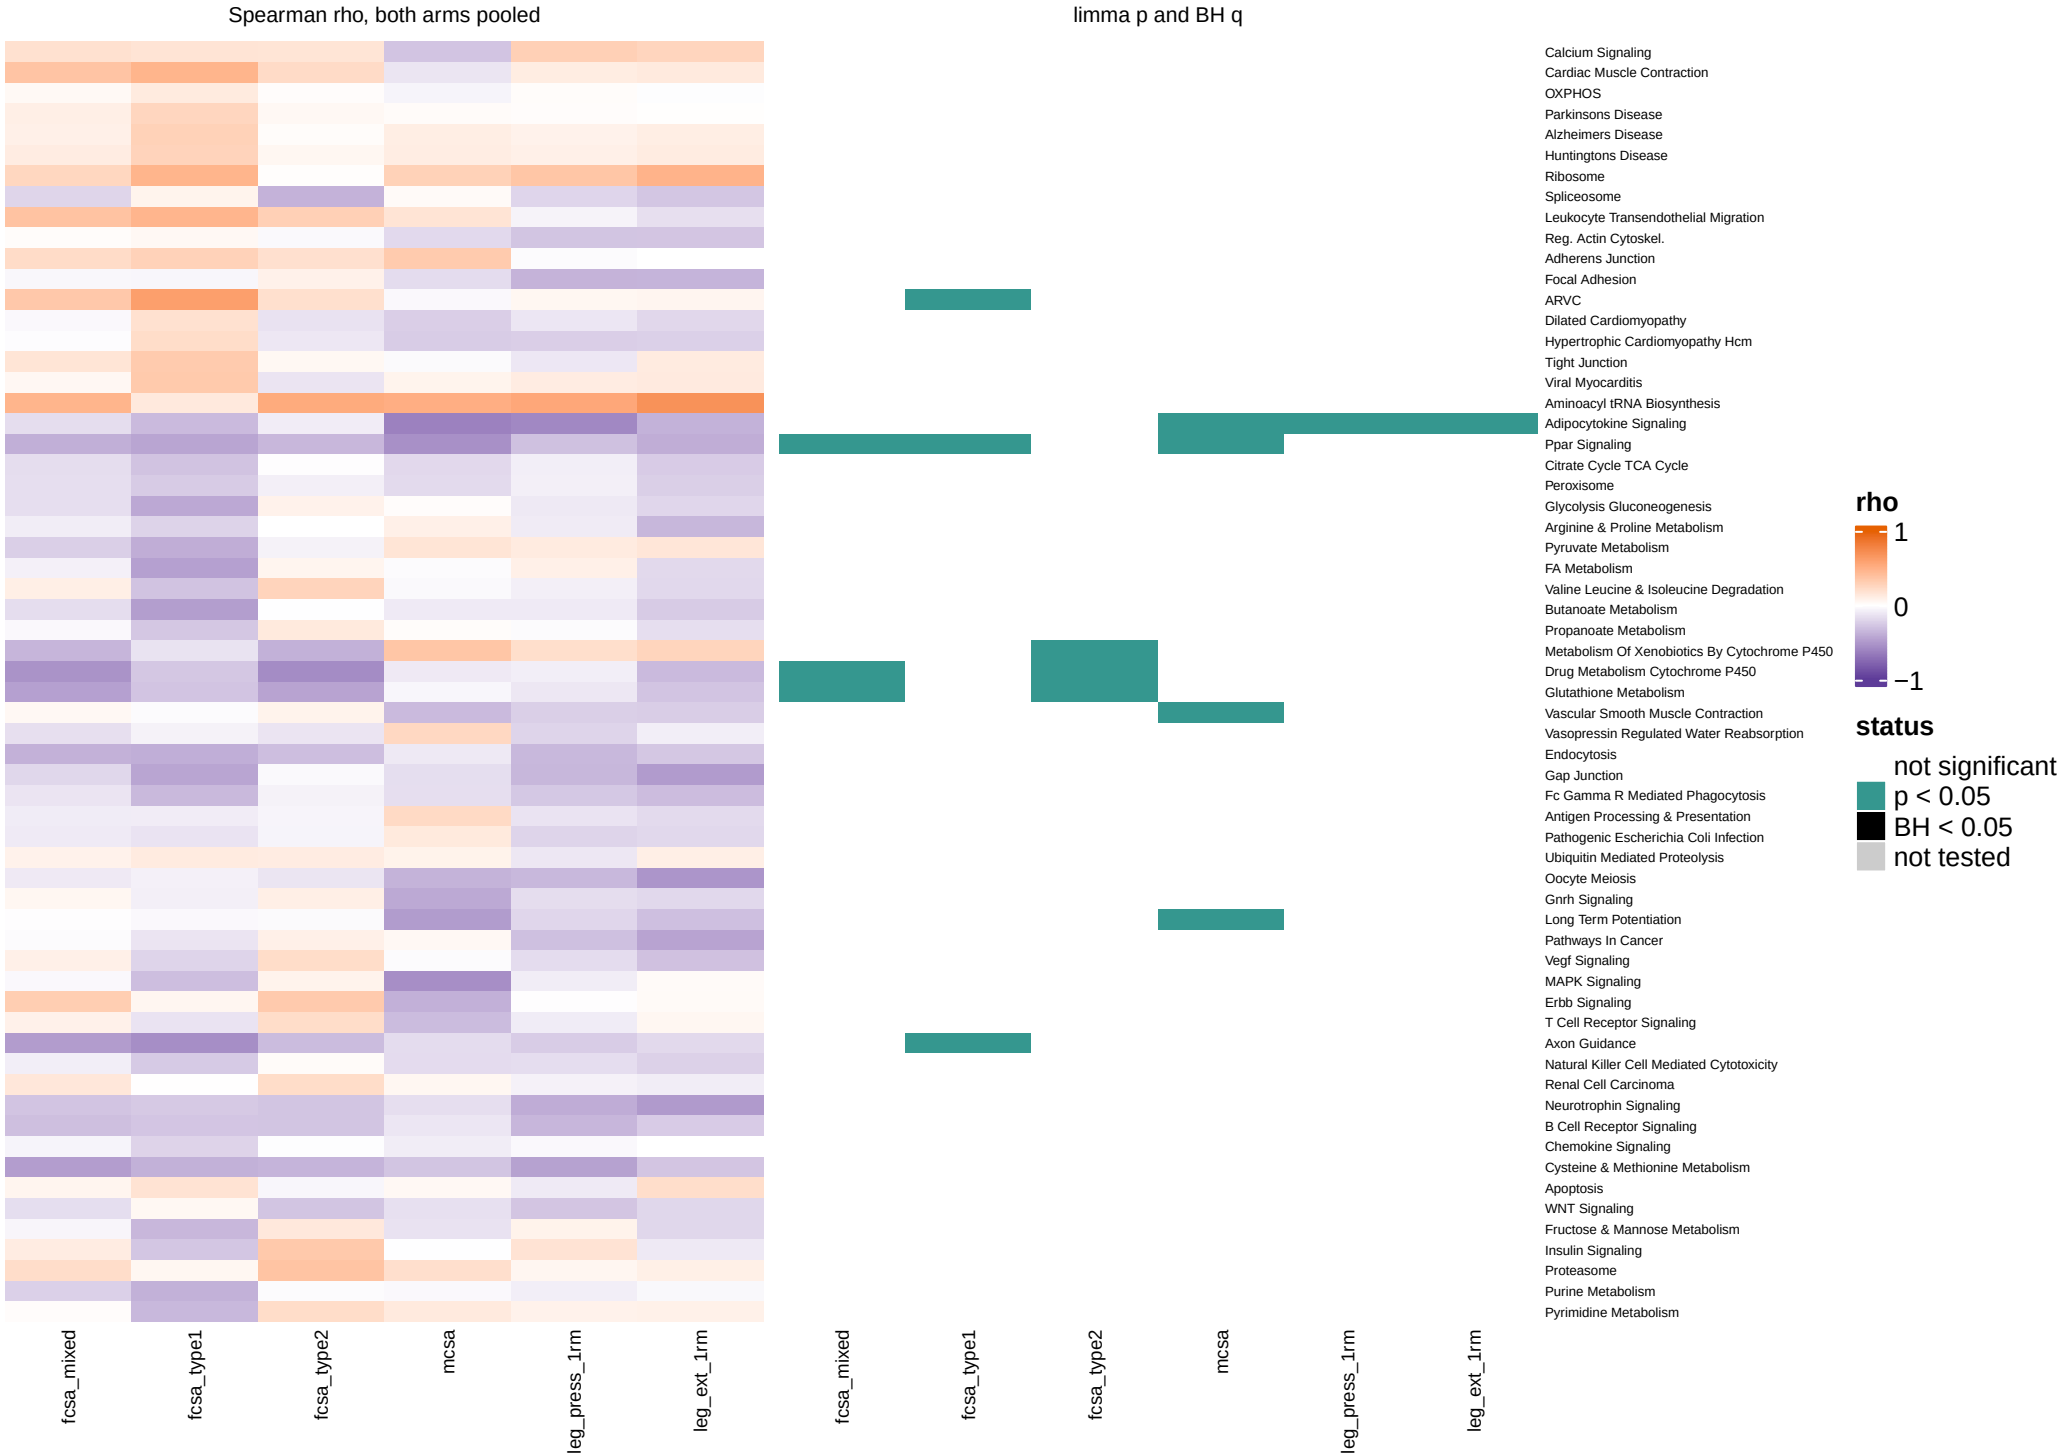


All 62 sets, one row each. Spearman rho between the singscore (T3 level) and each trait; status from limma. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/set_trait_associations.xlsx, change_score.

Sample model overview: GOBP

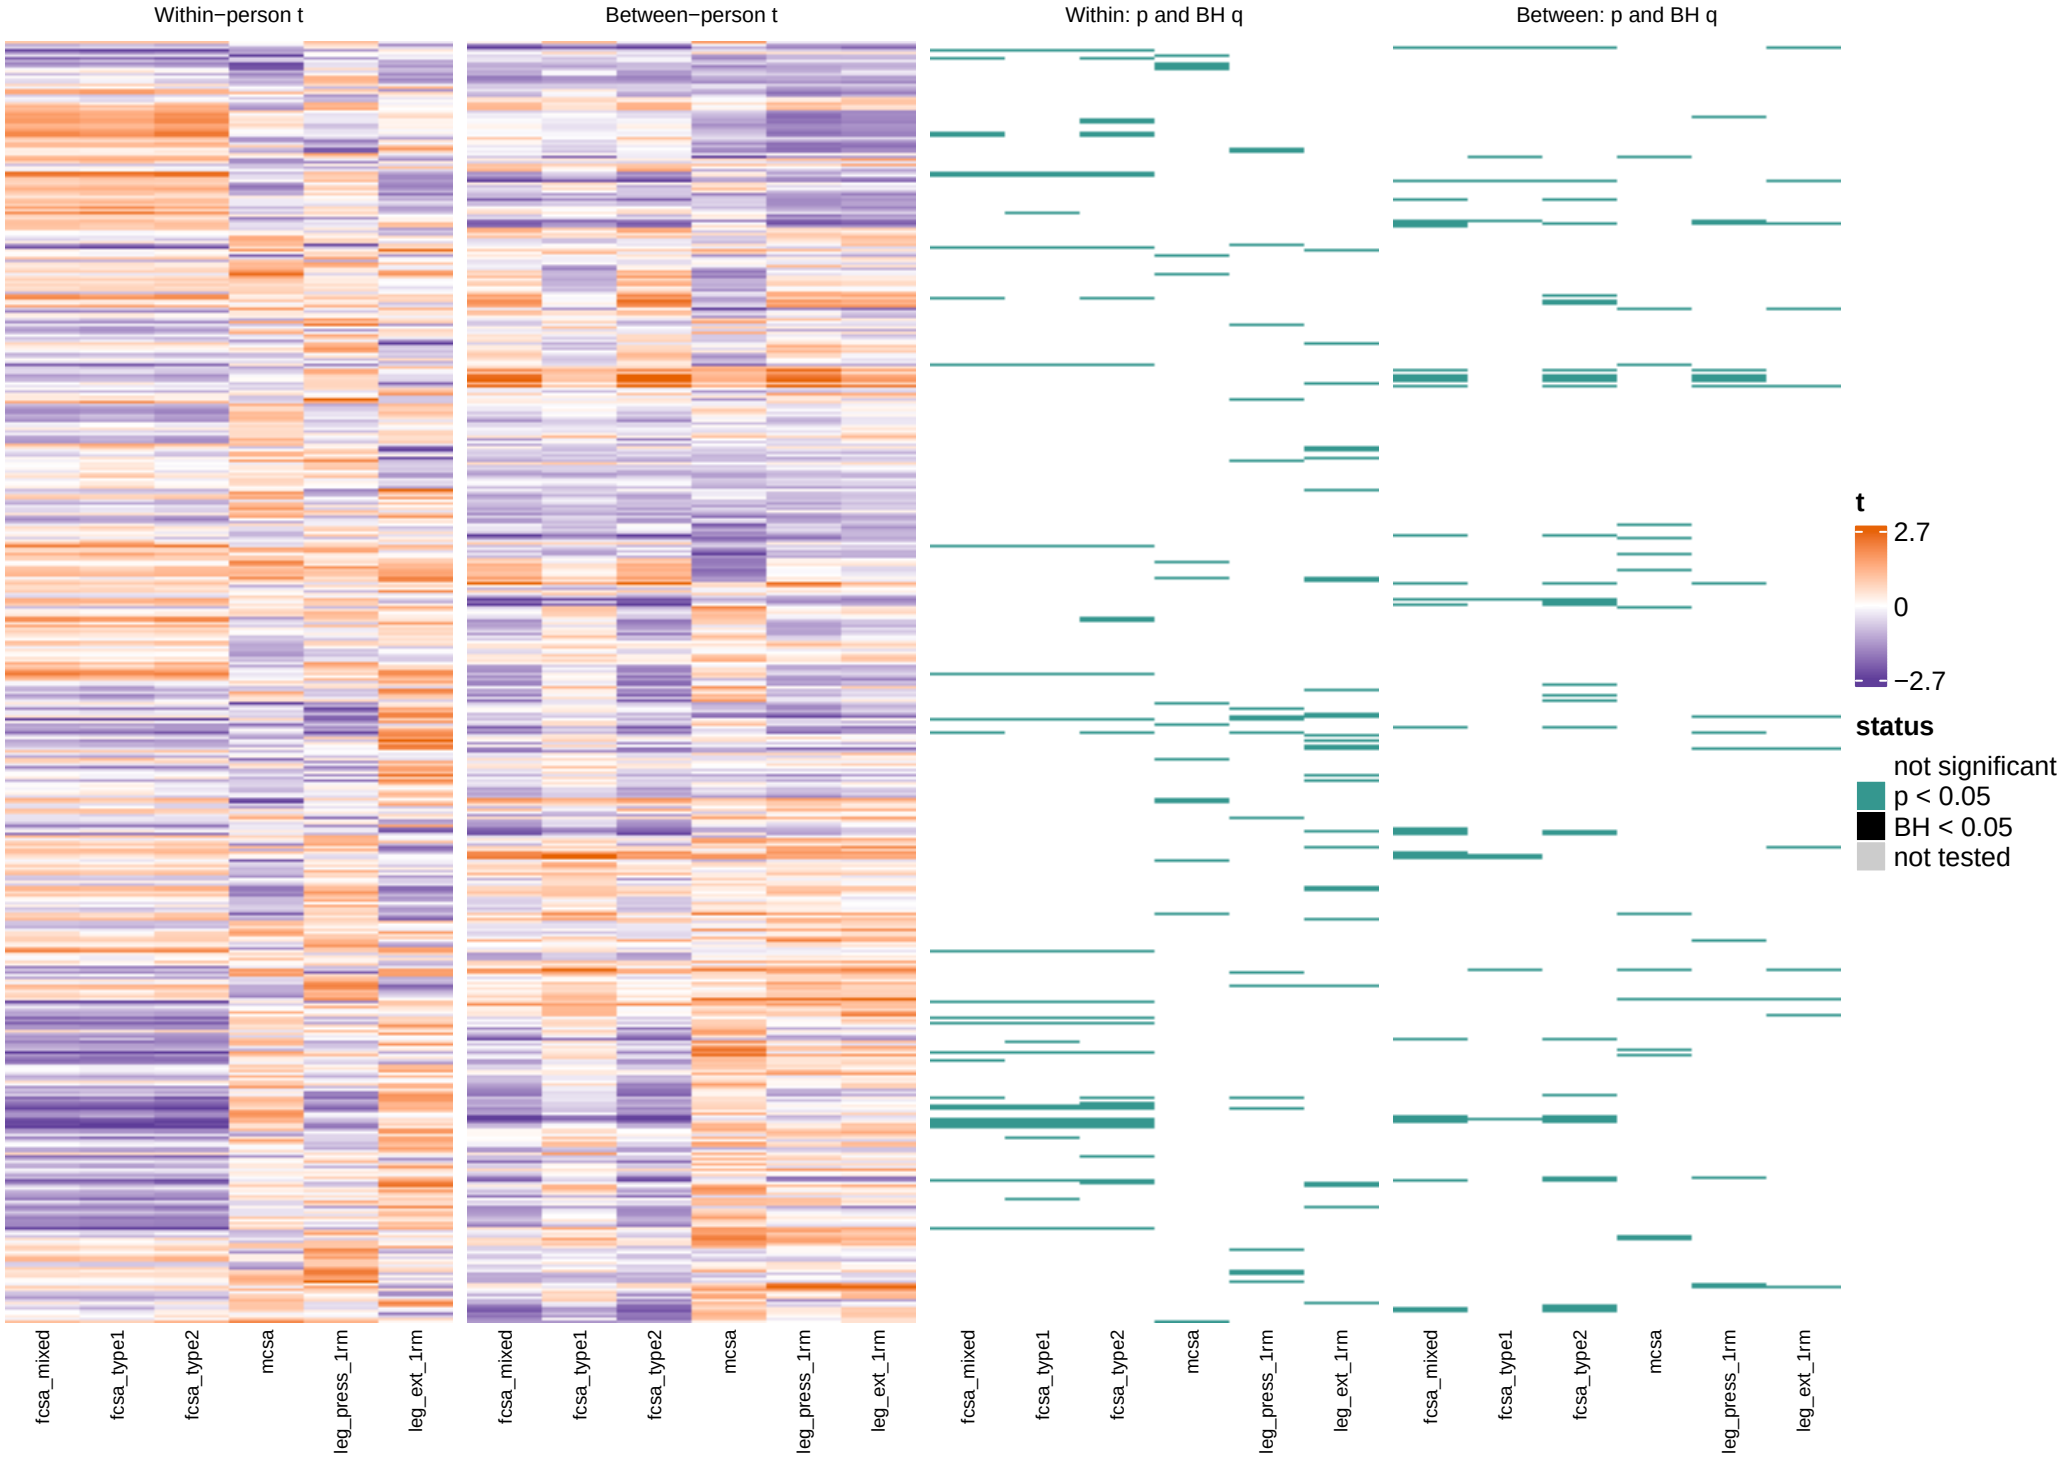


All 897 sets, one row each. Moderated t of the within and between terms, abundance ~ timepoint + between + within, subject blocked. Colours stop at the 99th percentile of |t|, 2.7. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/set_trait_associations.xlsx, model.

Change score overview, training window: GOBP

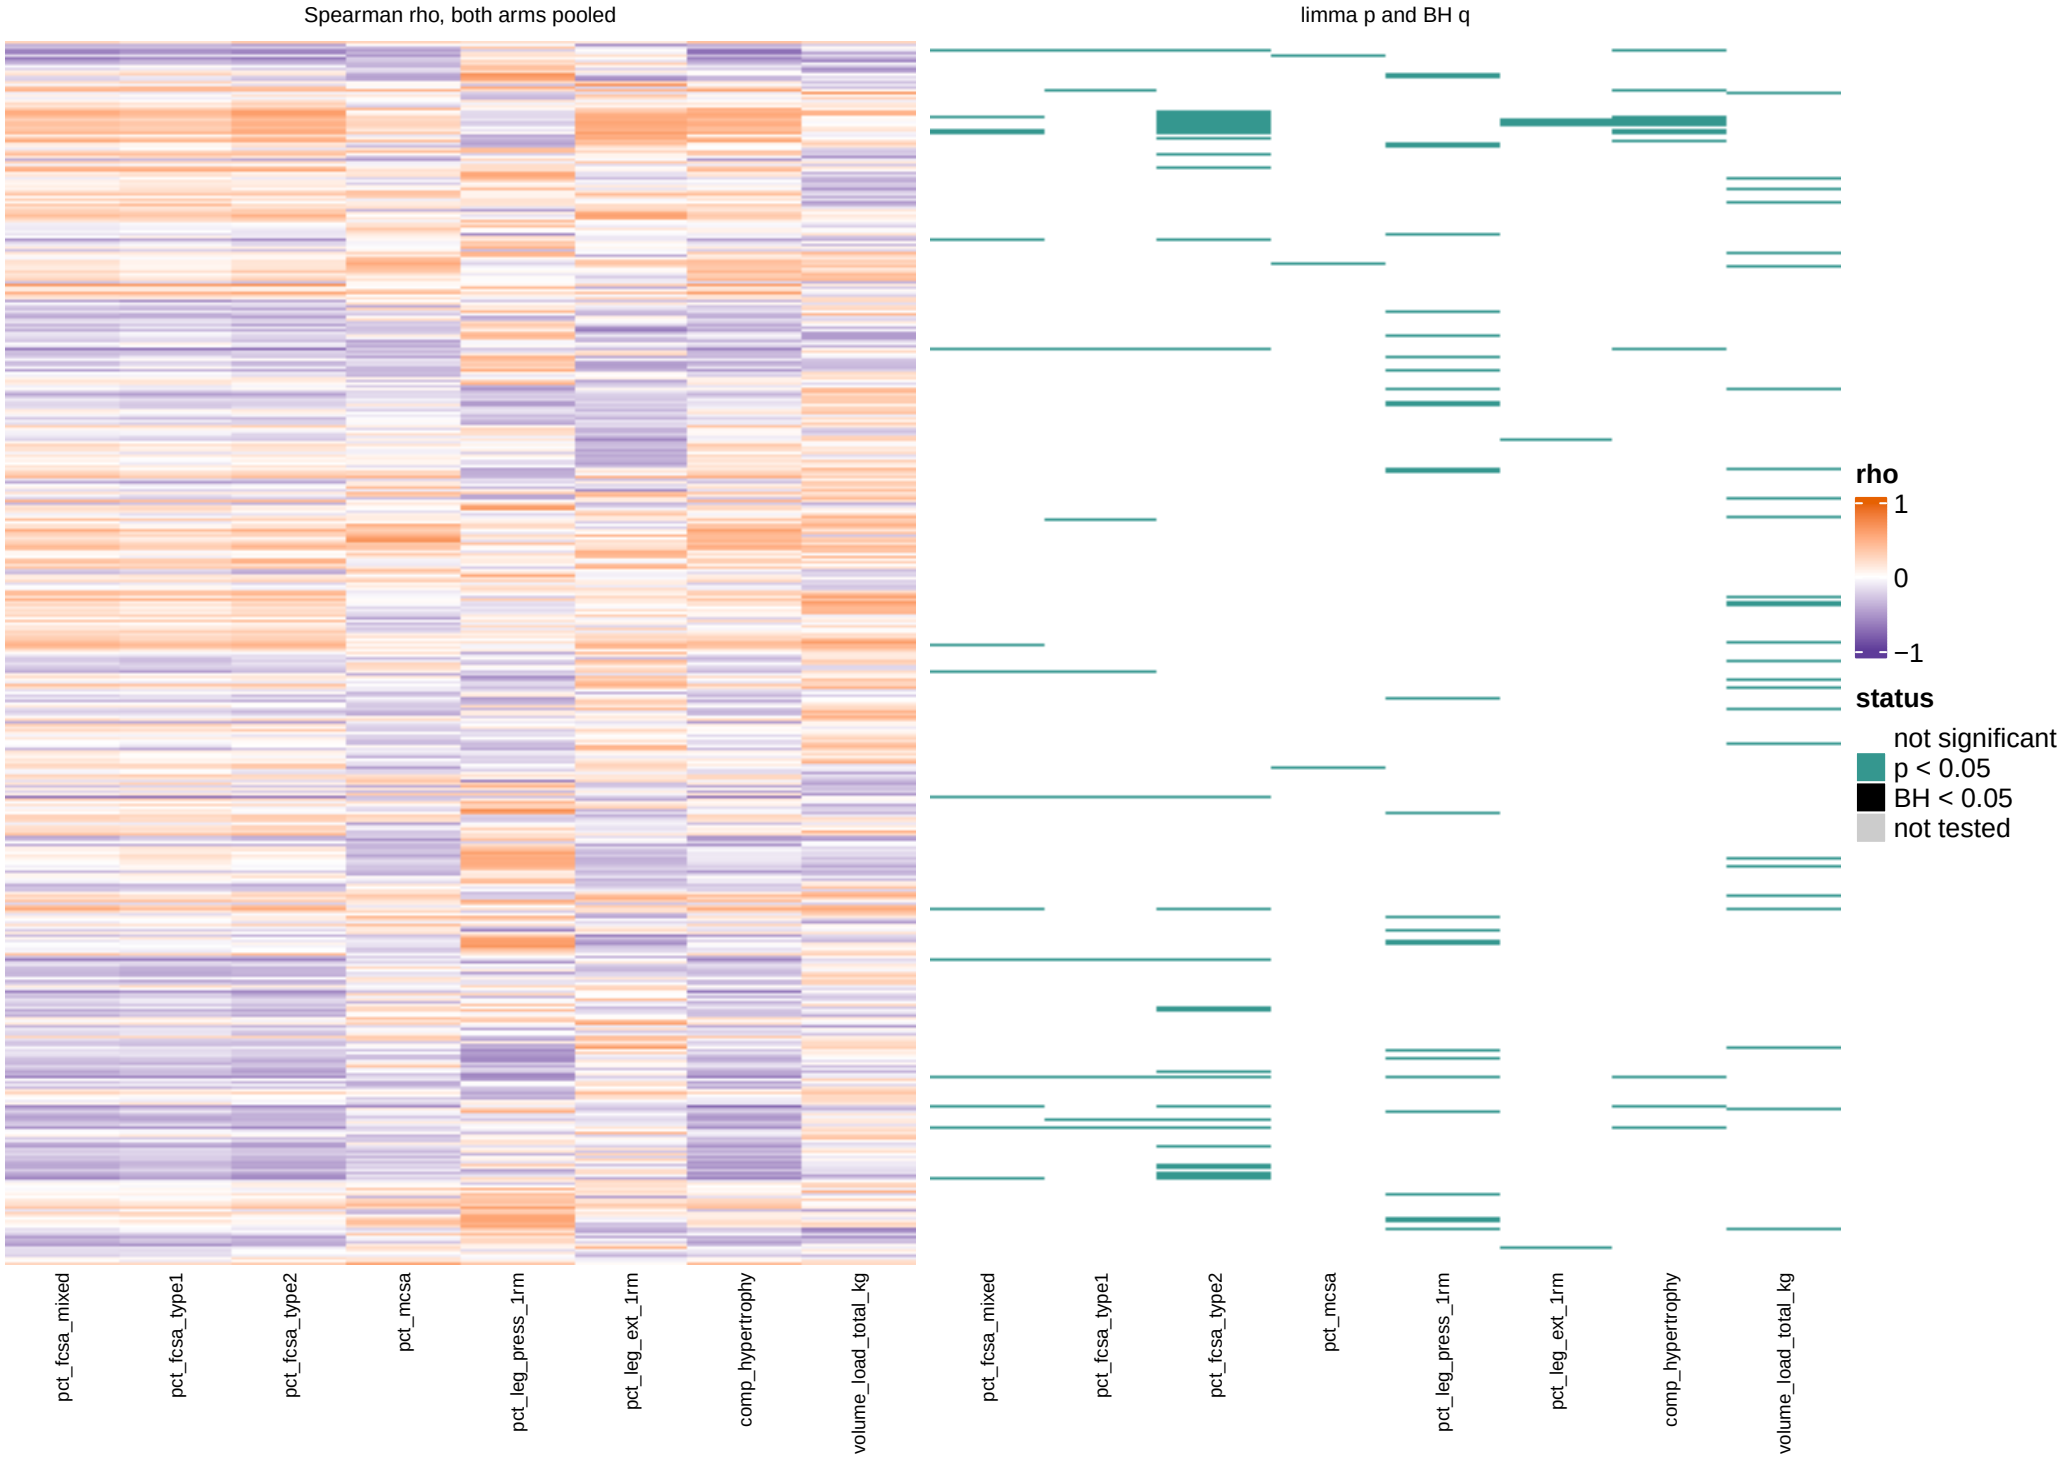


All 897 sets, one row each. Spearman rho between the singscore (change, T1 to T2) and each trait; status from limma. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/set_trait_associations.xlsx, change_score.

Change score overview, baseline window: GOBP

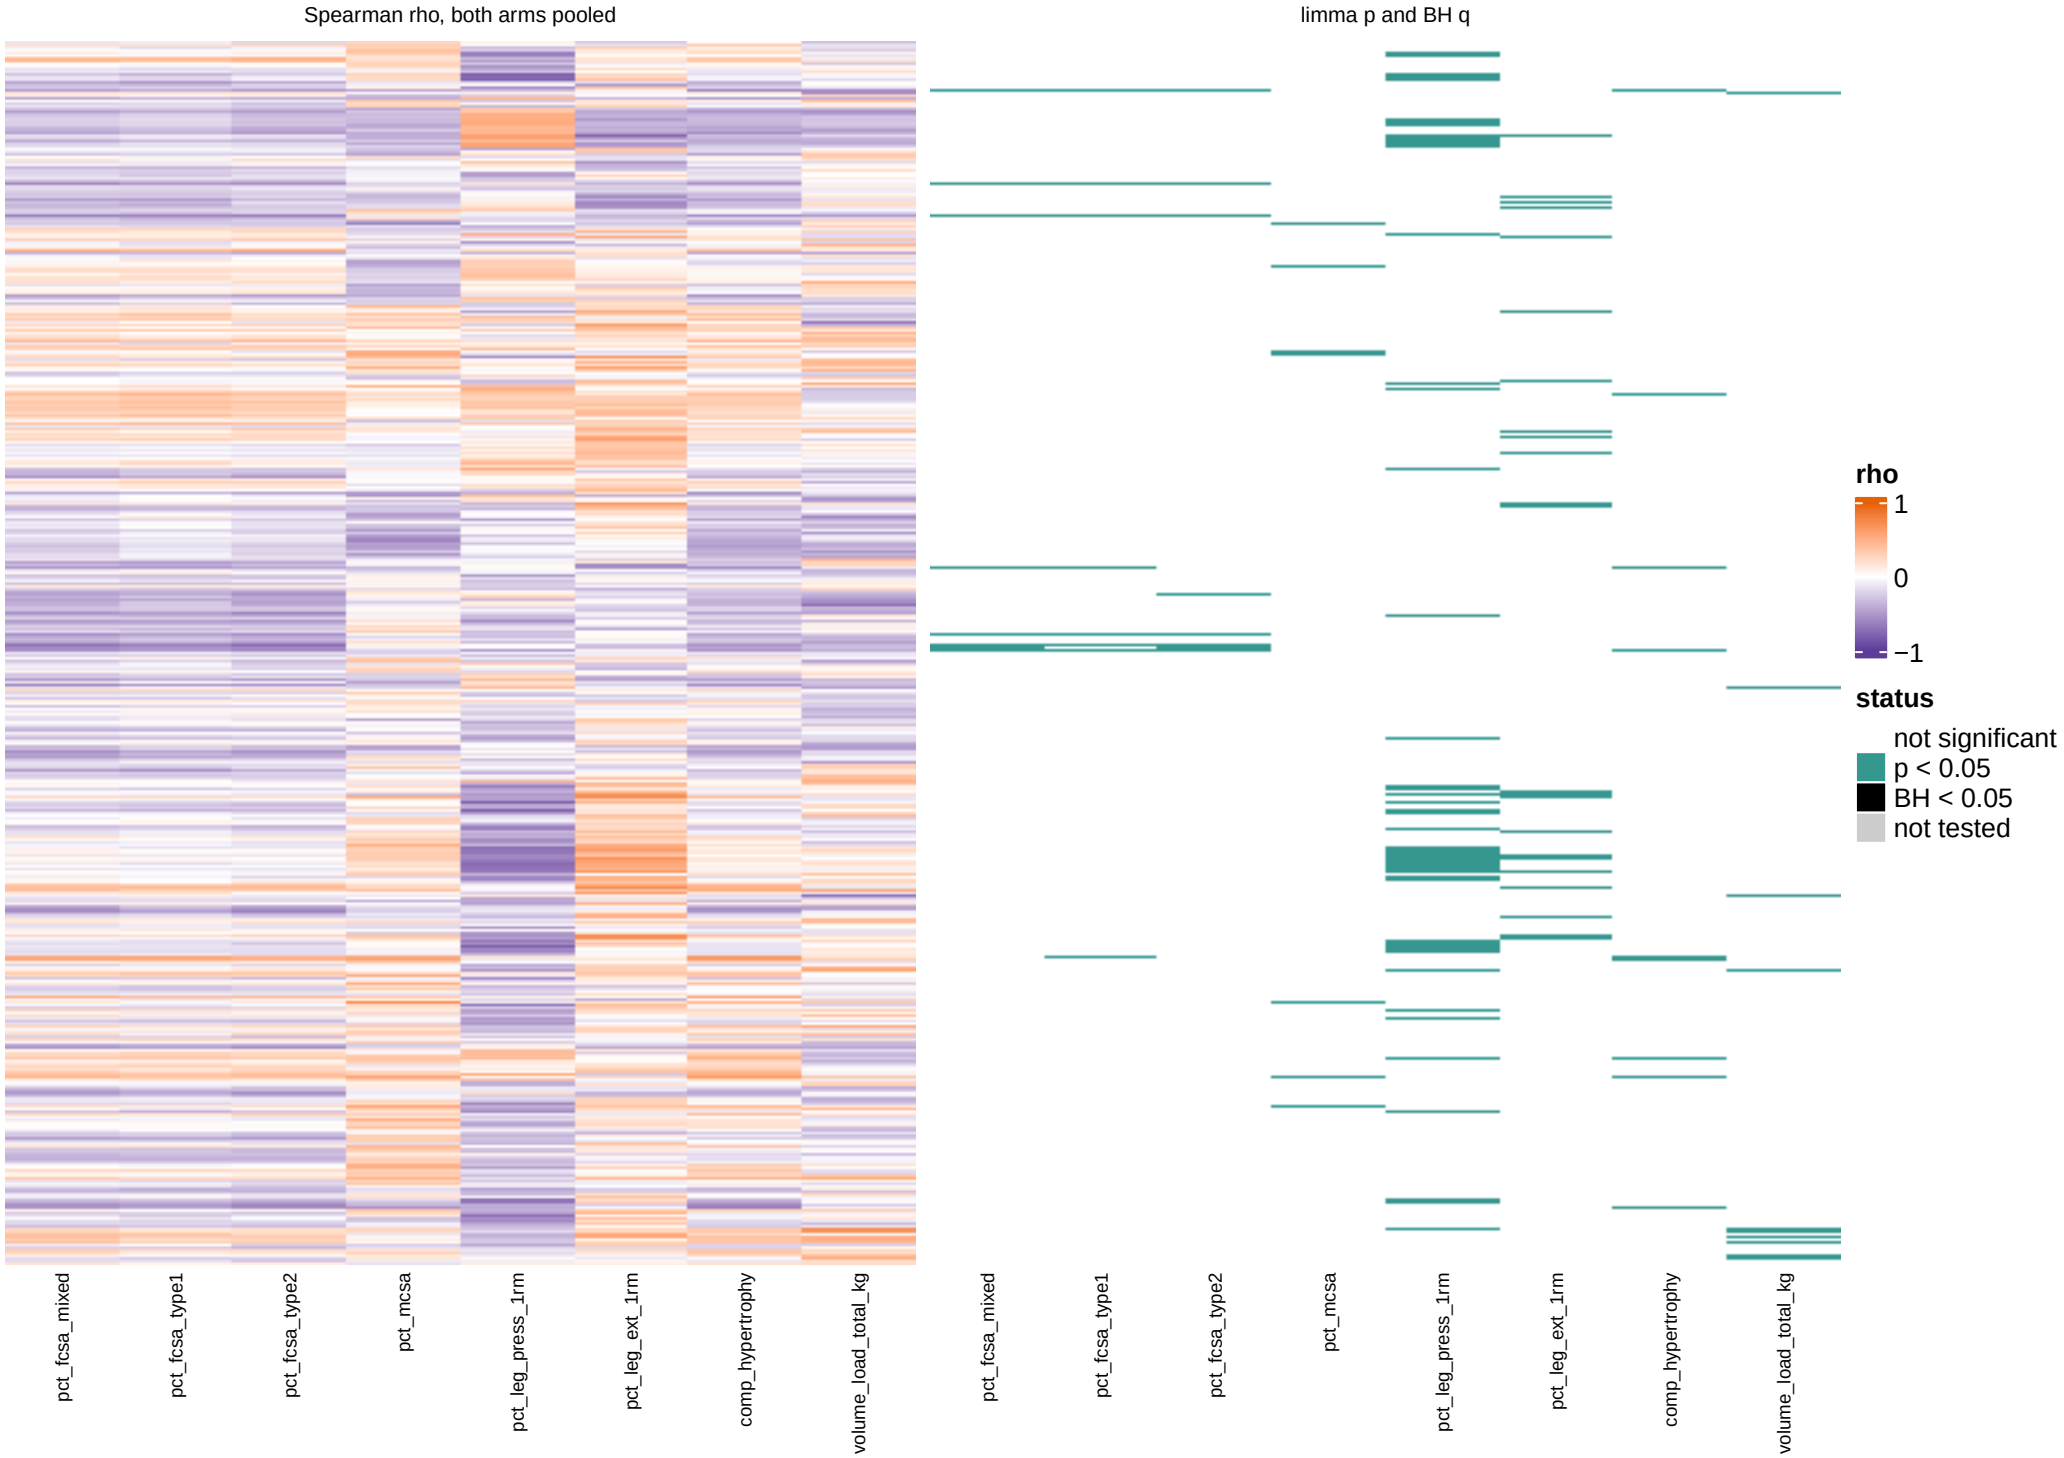


All 897 sets, one row each. Spearman rho between the singscore (T1 level) and each trait; status from limma. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/set_trait_associations.xlsx, change_score.

Change score overview, acute window: GOBP

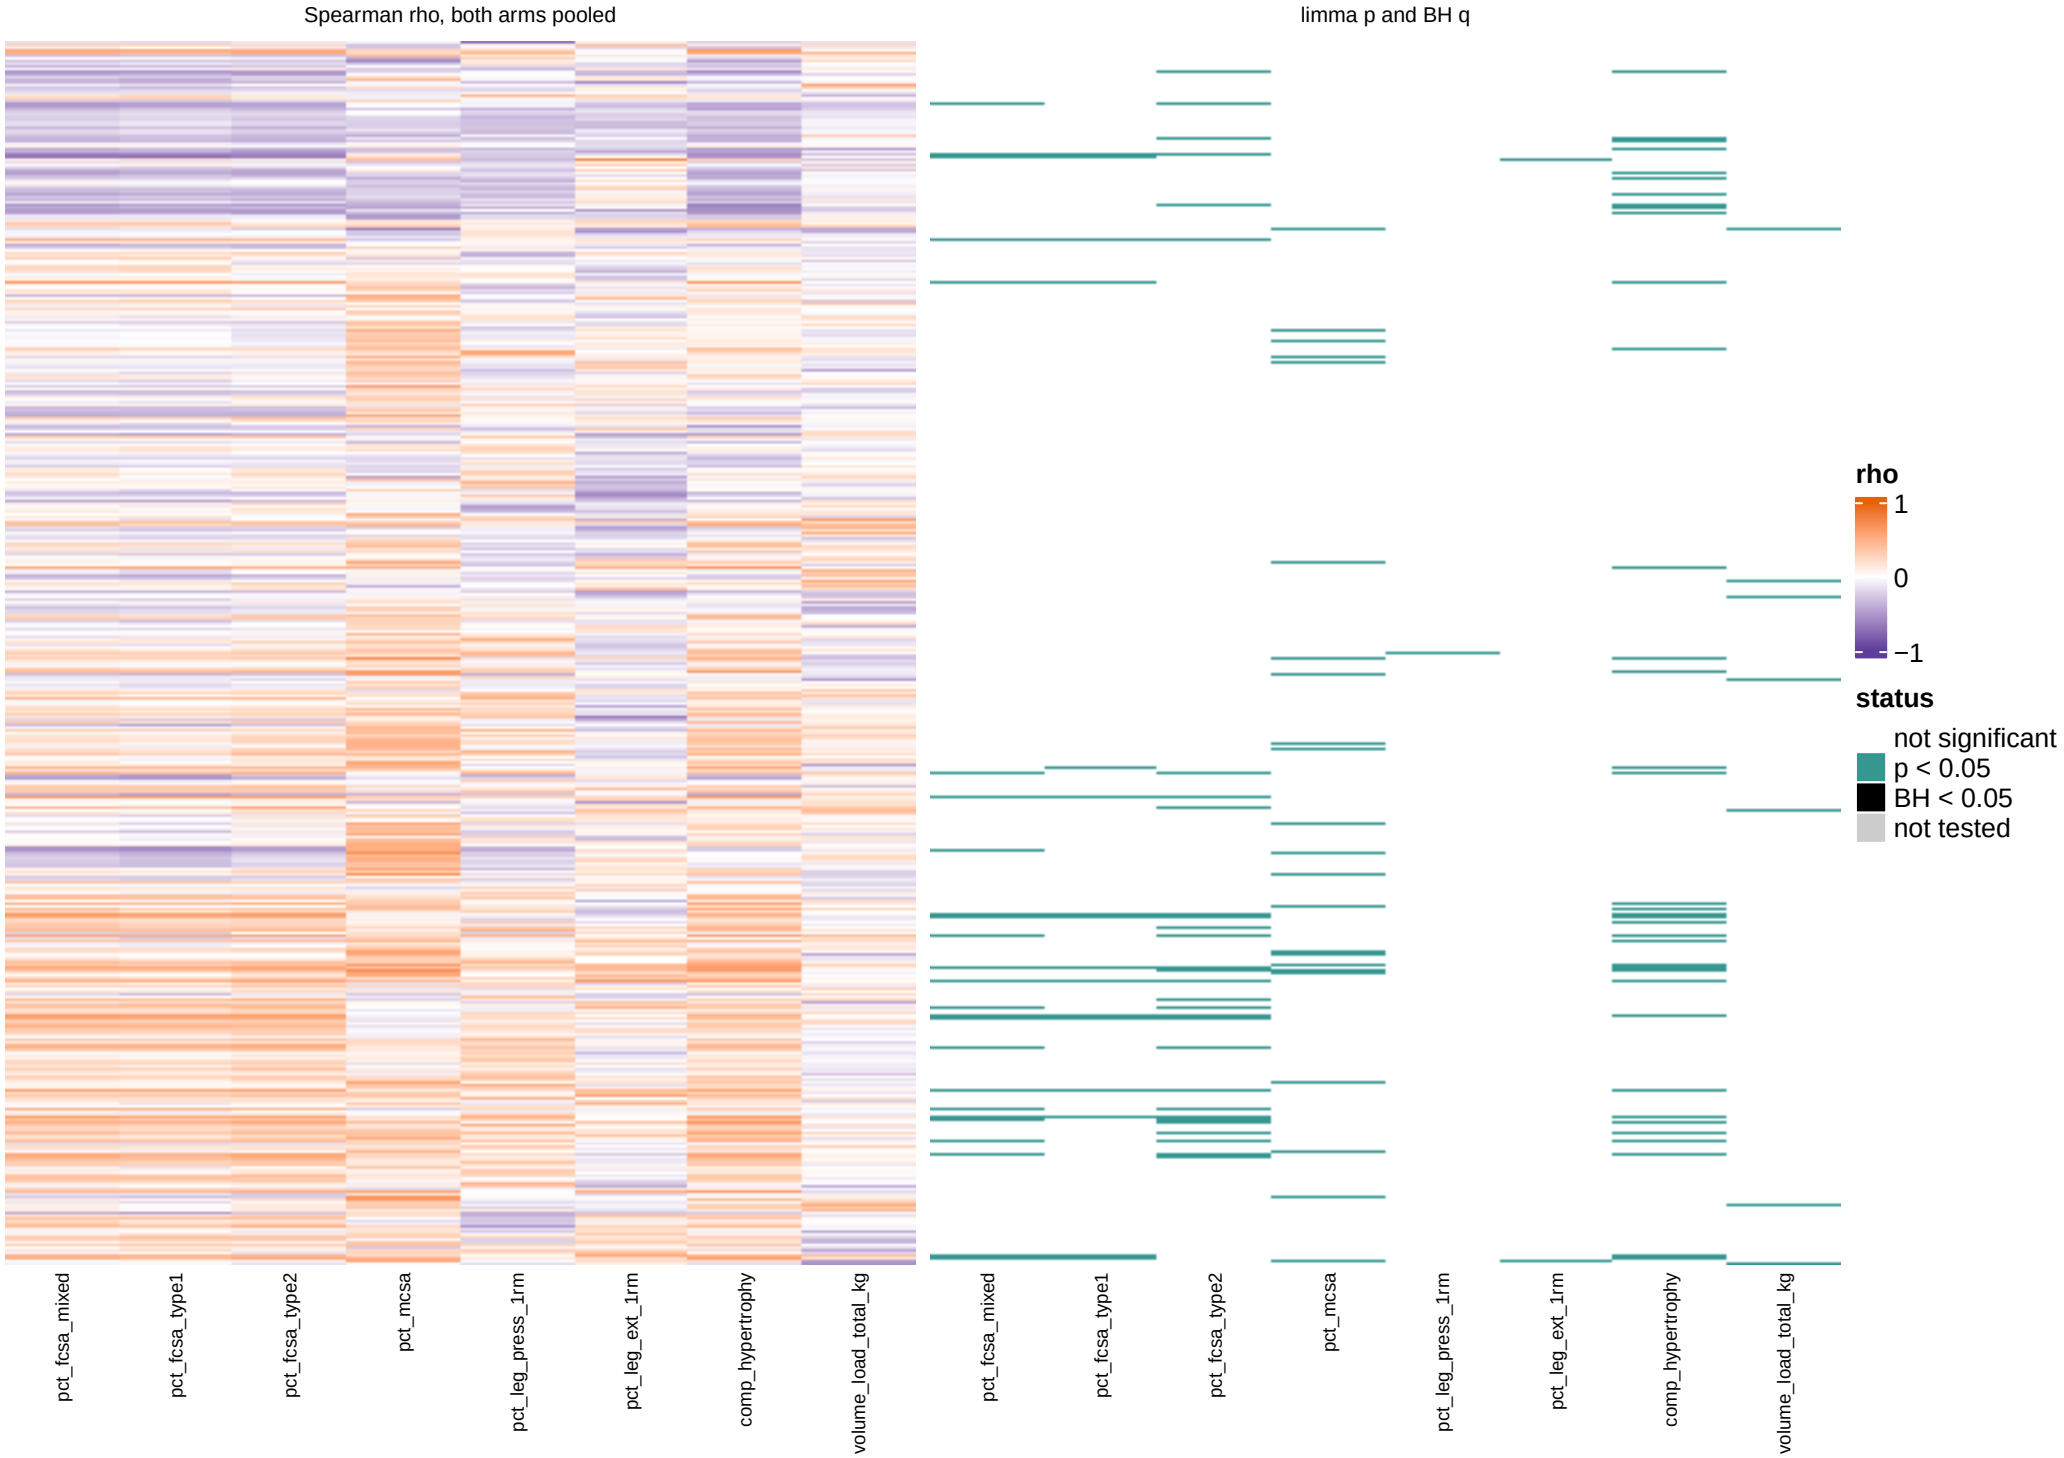


All 897 sets, one row each. Spearman rho between the singscore (change, T2 to T3) and each trait; status from limma. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/set_trait_associations.xlsx, change_score.

Change score overview, baseline_level window: GOBP

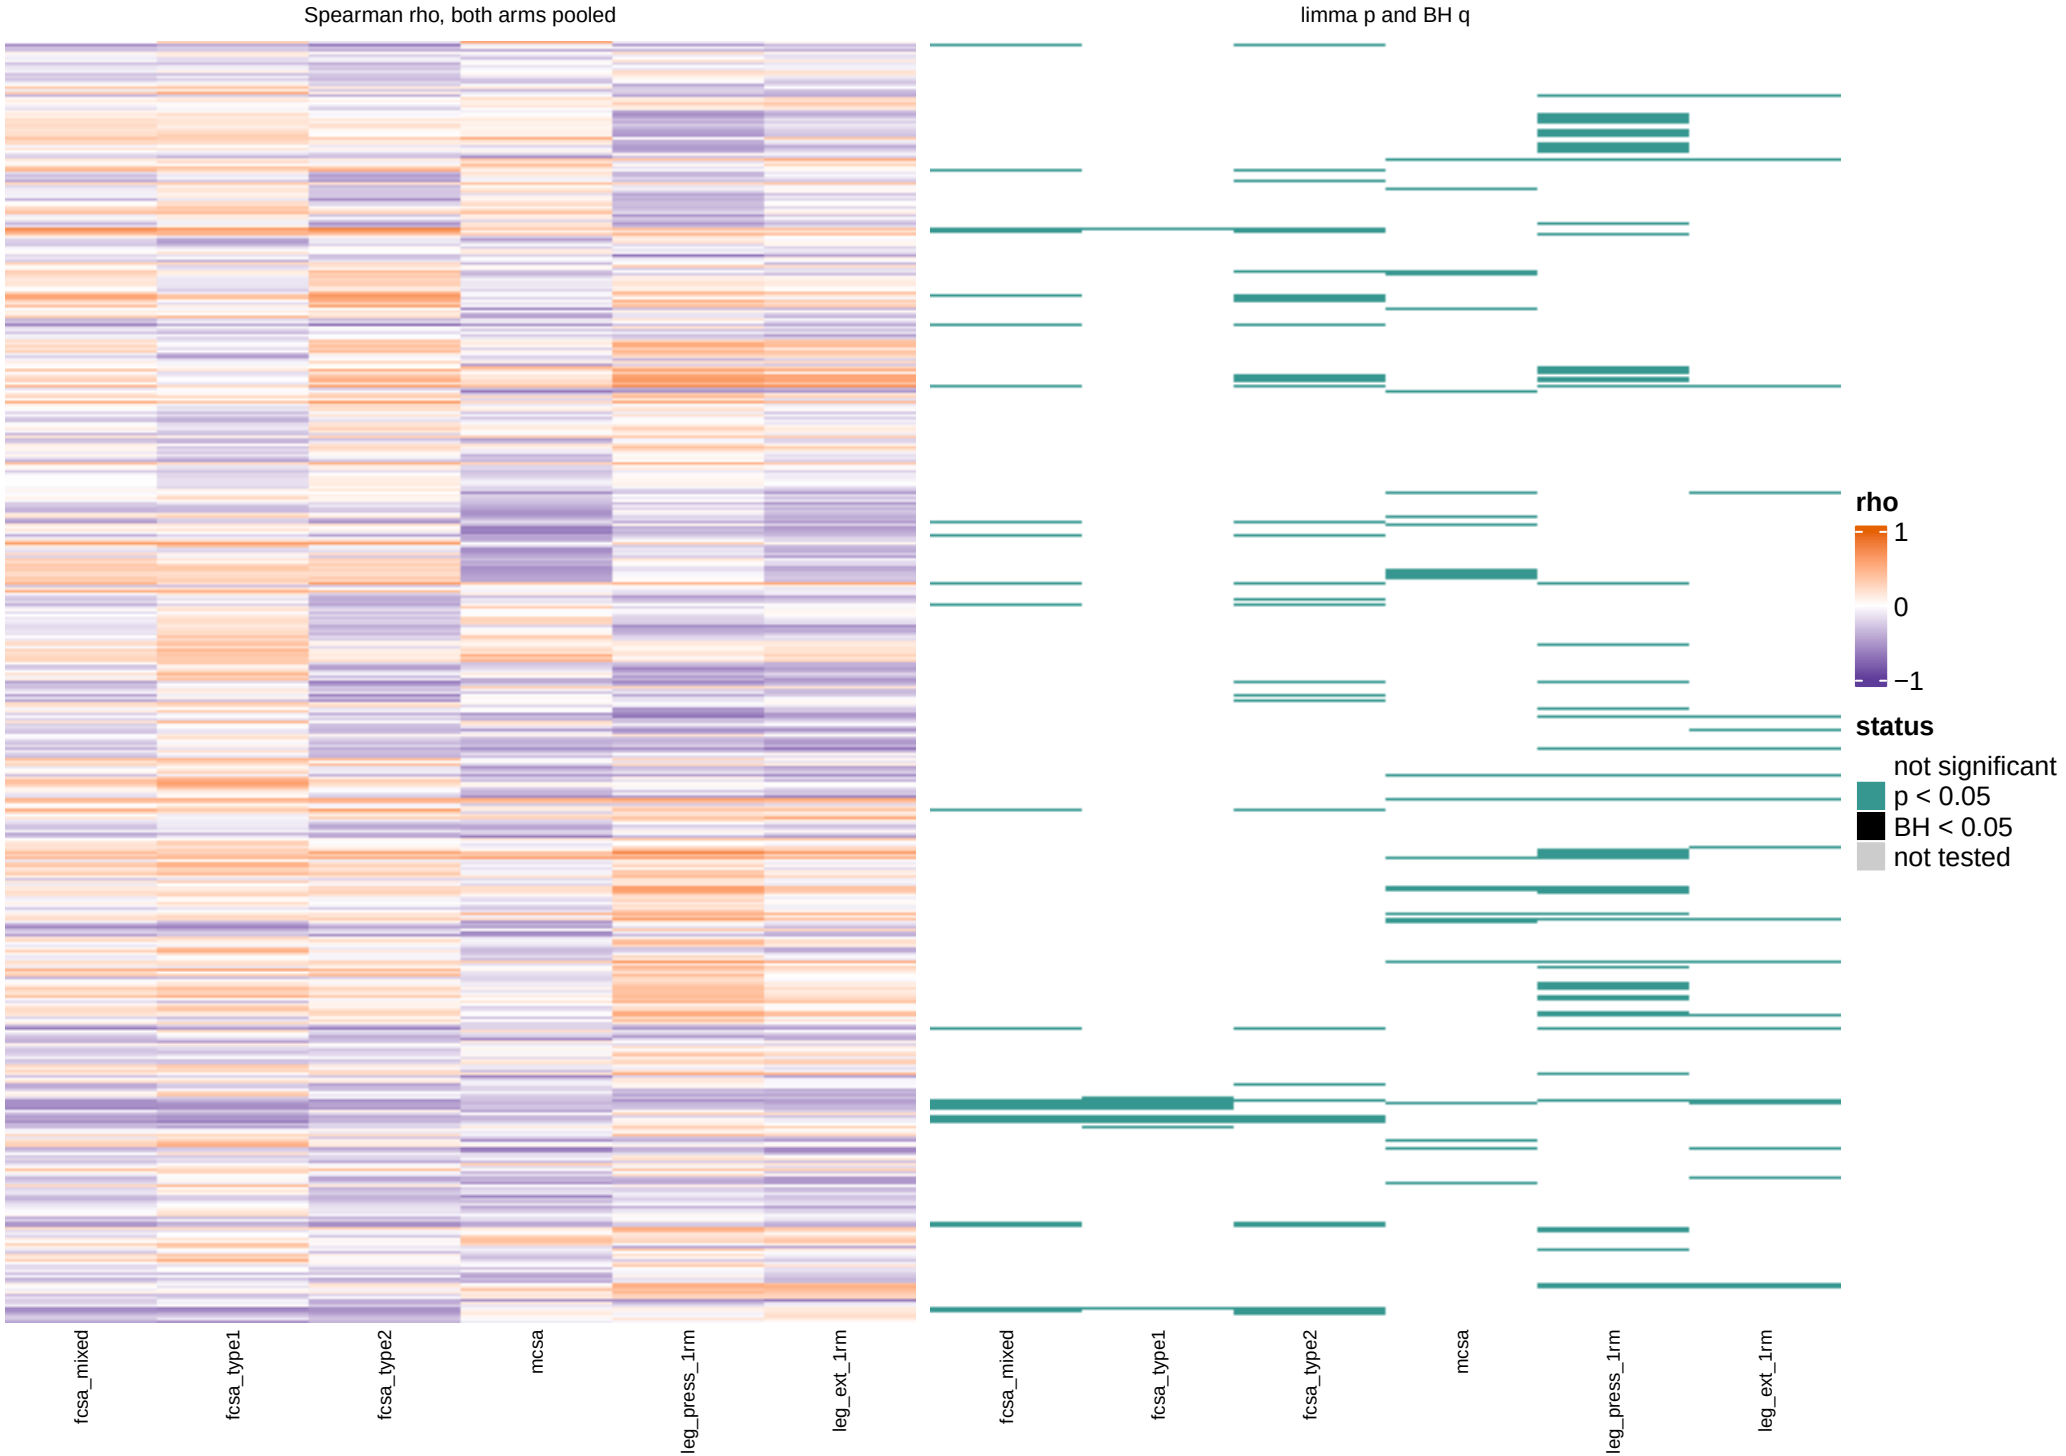


All 897 sets, one row each. Spearman rho between the singscore (T1 level) and each trait; status from limma. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/set_trait_associations.xlsx, change_score.

Change score overview, post_level window: GOBP

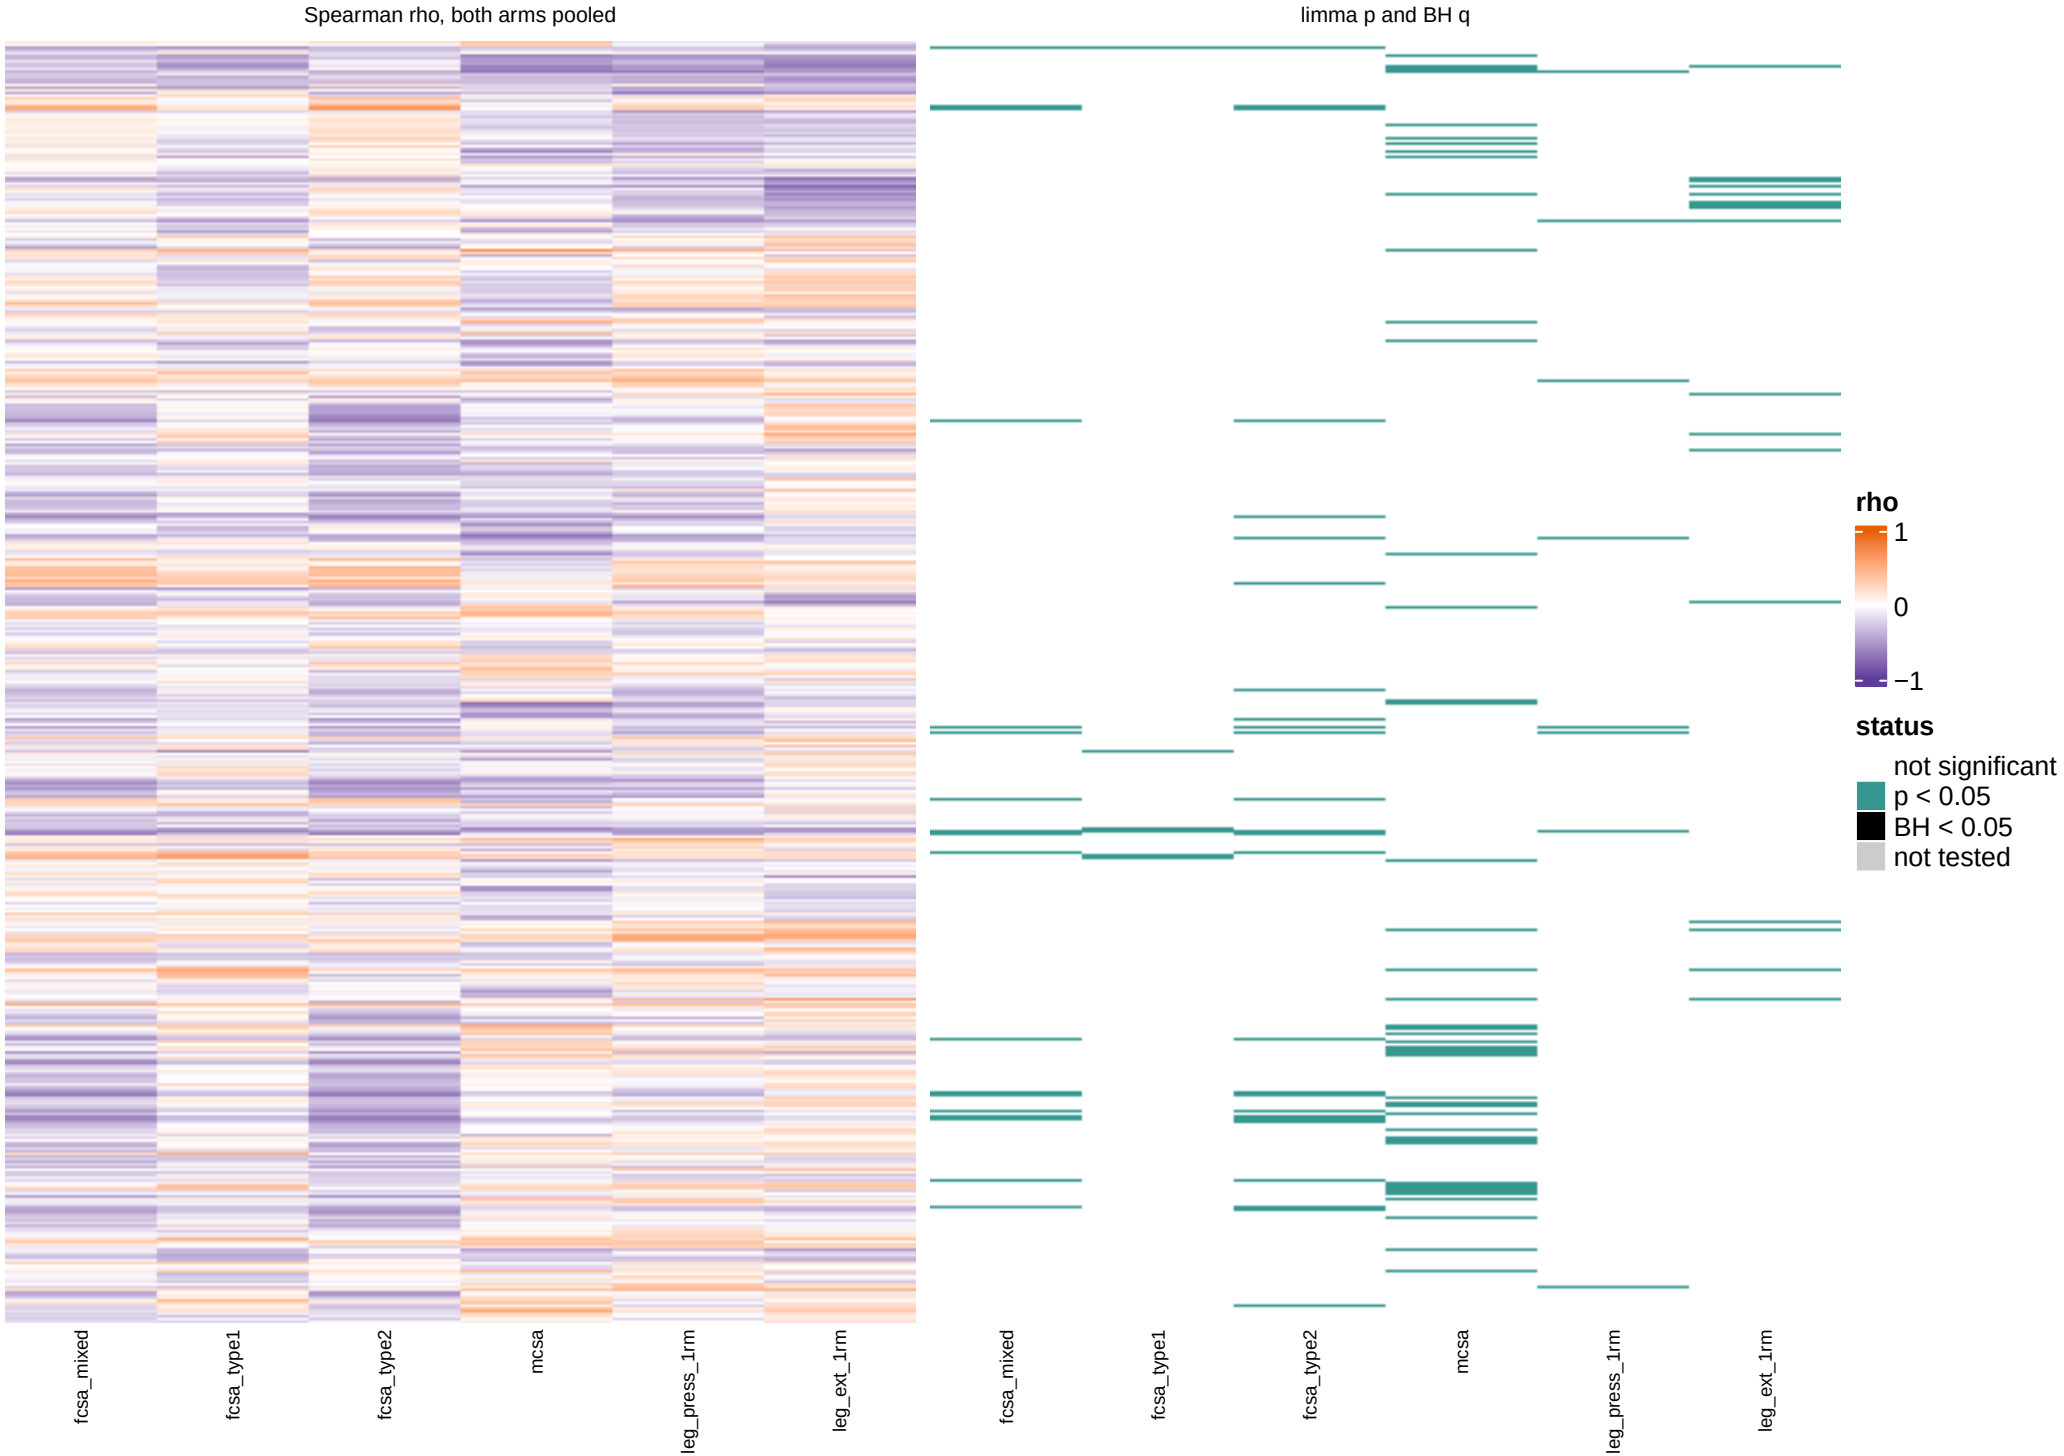


All 897 sets, one row each. Spearman rho between the singscore (T2 level) and each trait; status from limma. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/set_trait_associations.xlsx, change_score.

Change score overview, post_bout_level window: GOBP

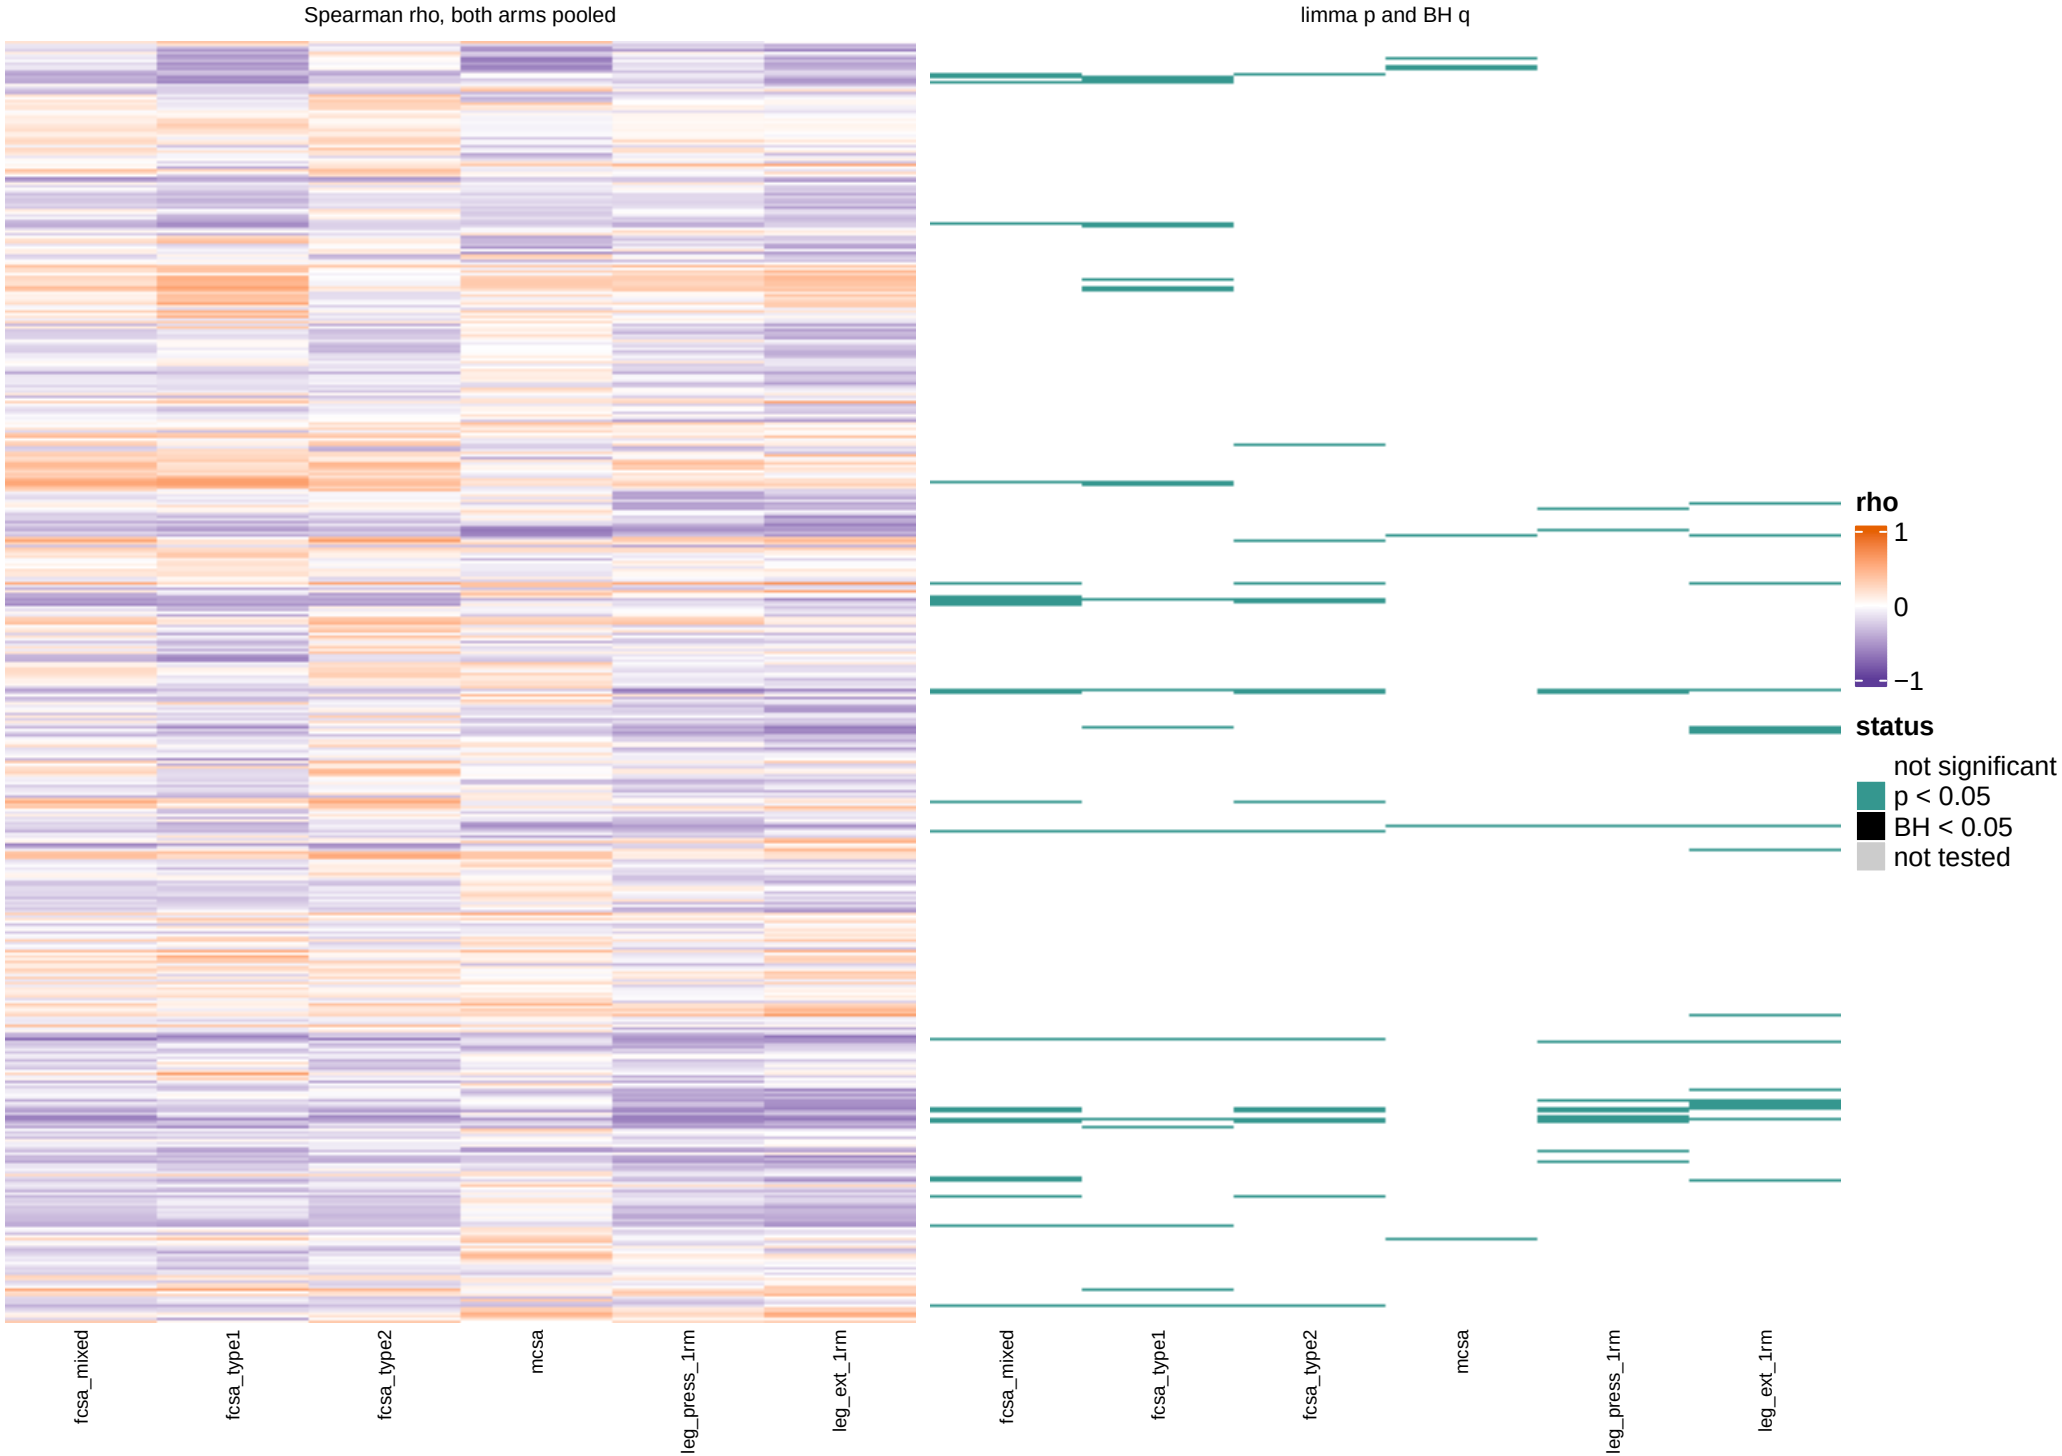

All 897 sets, one row each. Spearman rho between the singscore (T3 level) and each trait; status from limma. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/set_trait_associations.xlsx, change_score.

Sample model overview: GO_Slim

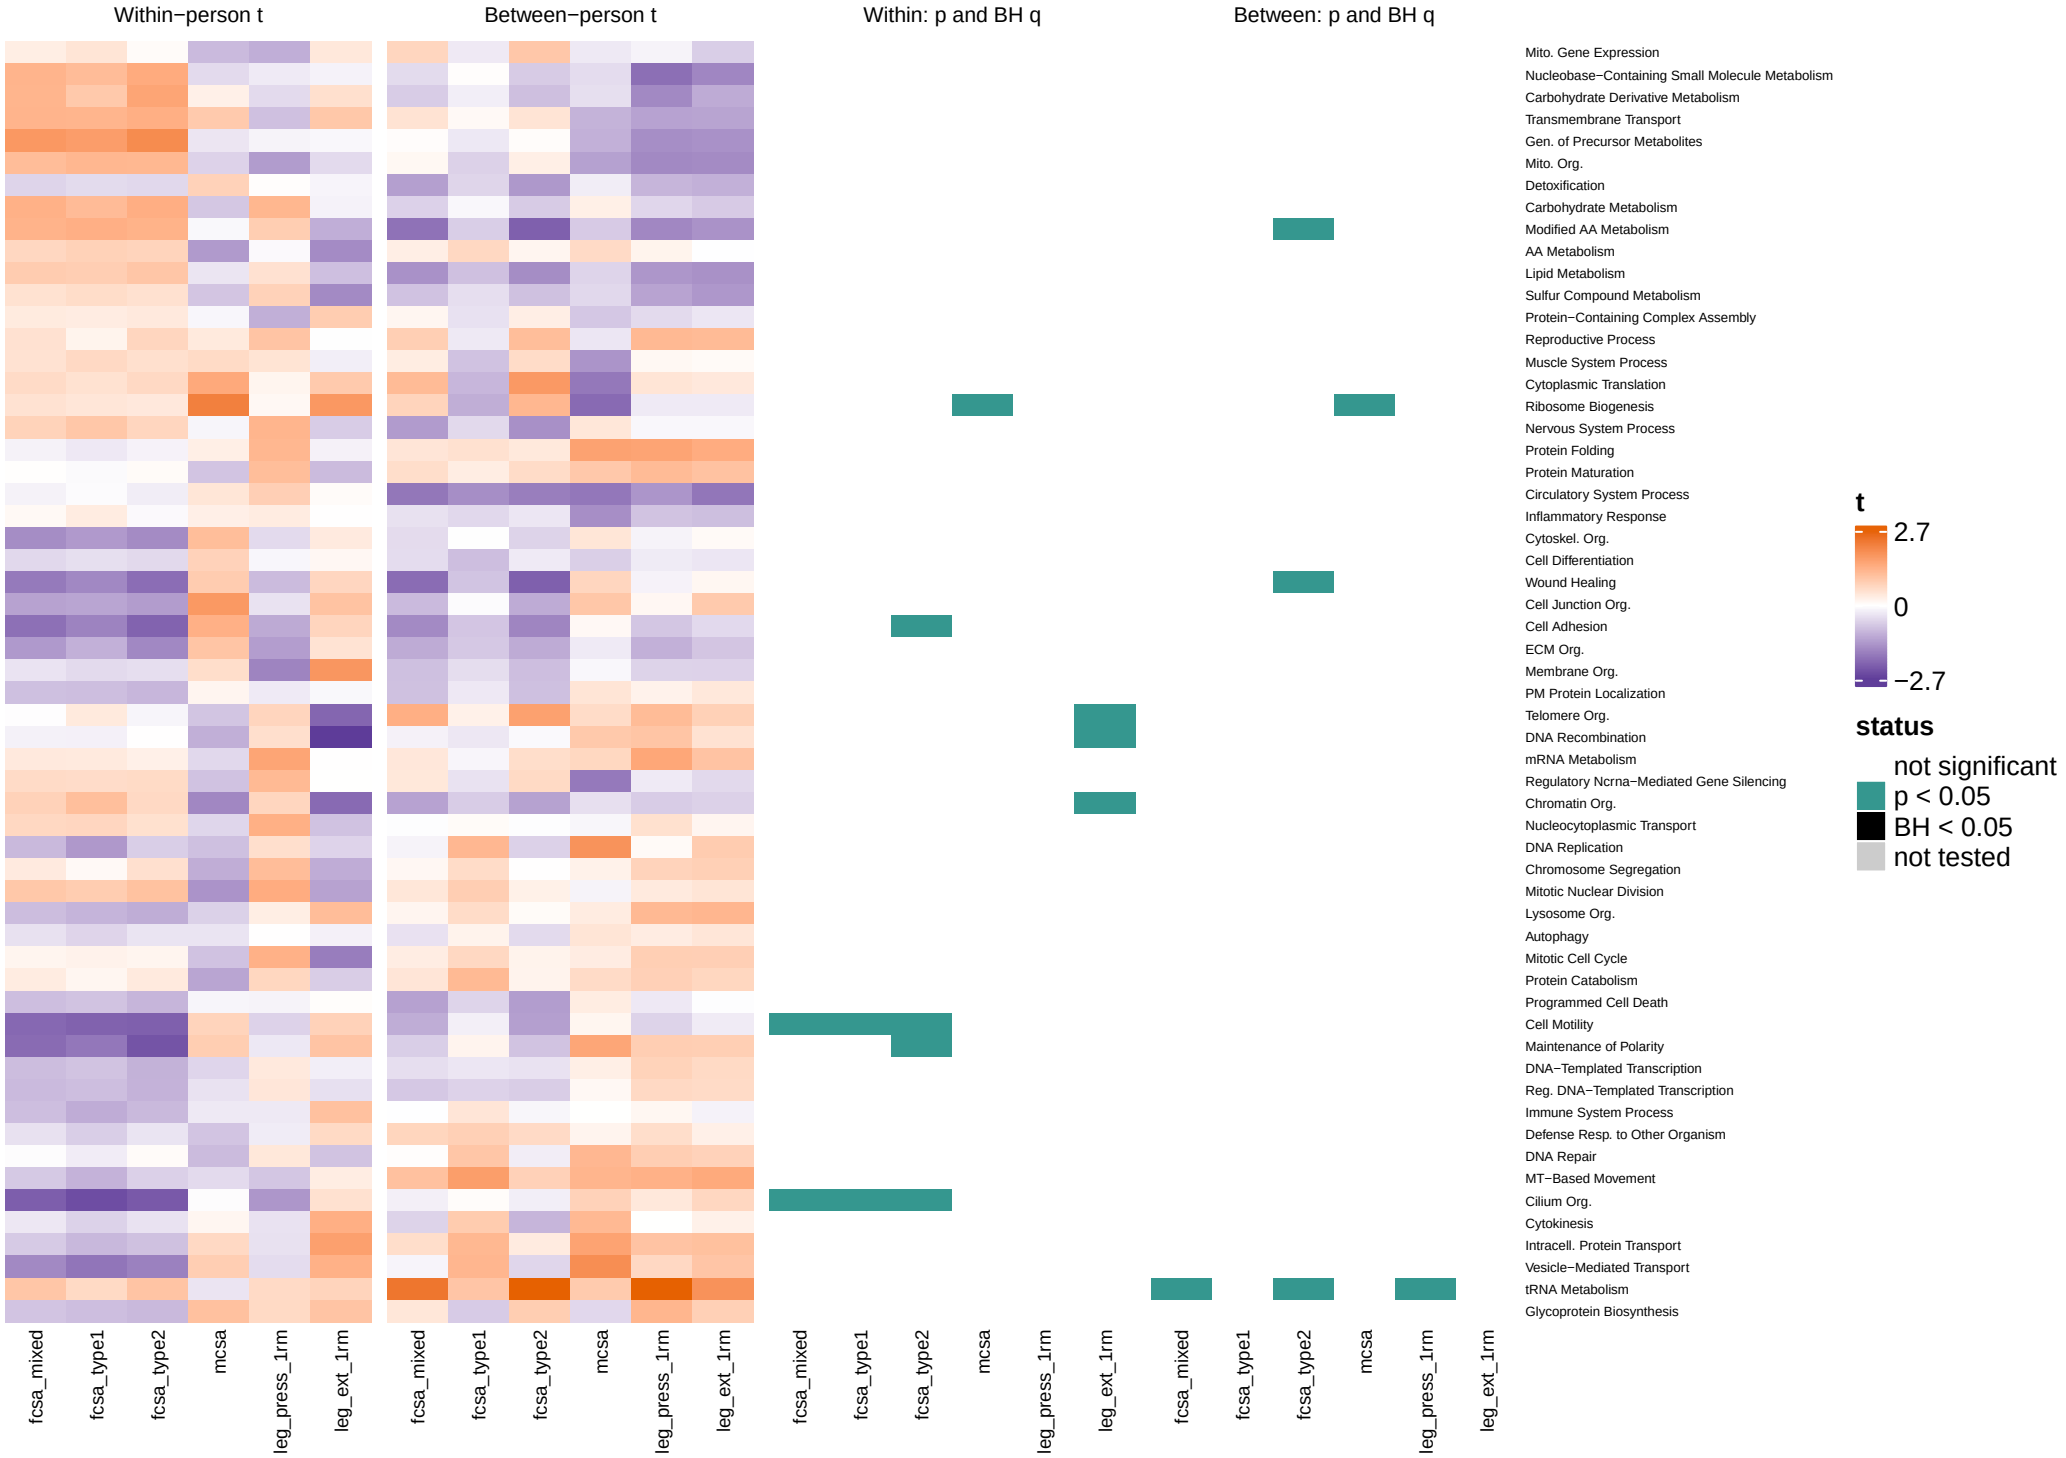

All 58 sets, one row each. Moderated t of the within and between terms, abundance ~ timepoint + between + within, subject blocked. Colours stop at the 99th percentile of |t|, 2.7. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/set_trait_associations.xlsx, model.

Change score overview, training window: GO_Slim




All 58 sets, one row each. Spearman rho between the singscore (change, T1 to T2) and each trait; status from limma. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/set_trait_associations.xlsx, change_score.

Change score overview, baseline window: GO_Slim




All 58 sets, one row each. Spearman rho between the singscore (T1 level) and each trait; status from limma. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/set_trait_associations.xlsx, change_score.

Change score overview, acute window: GO_Slim

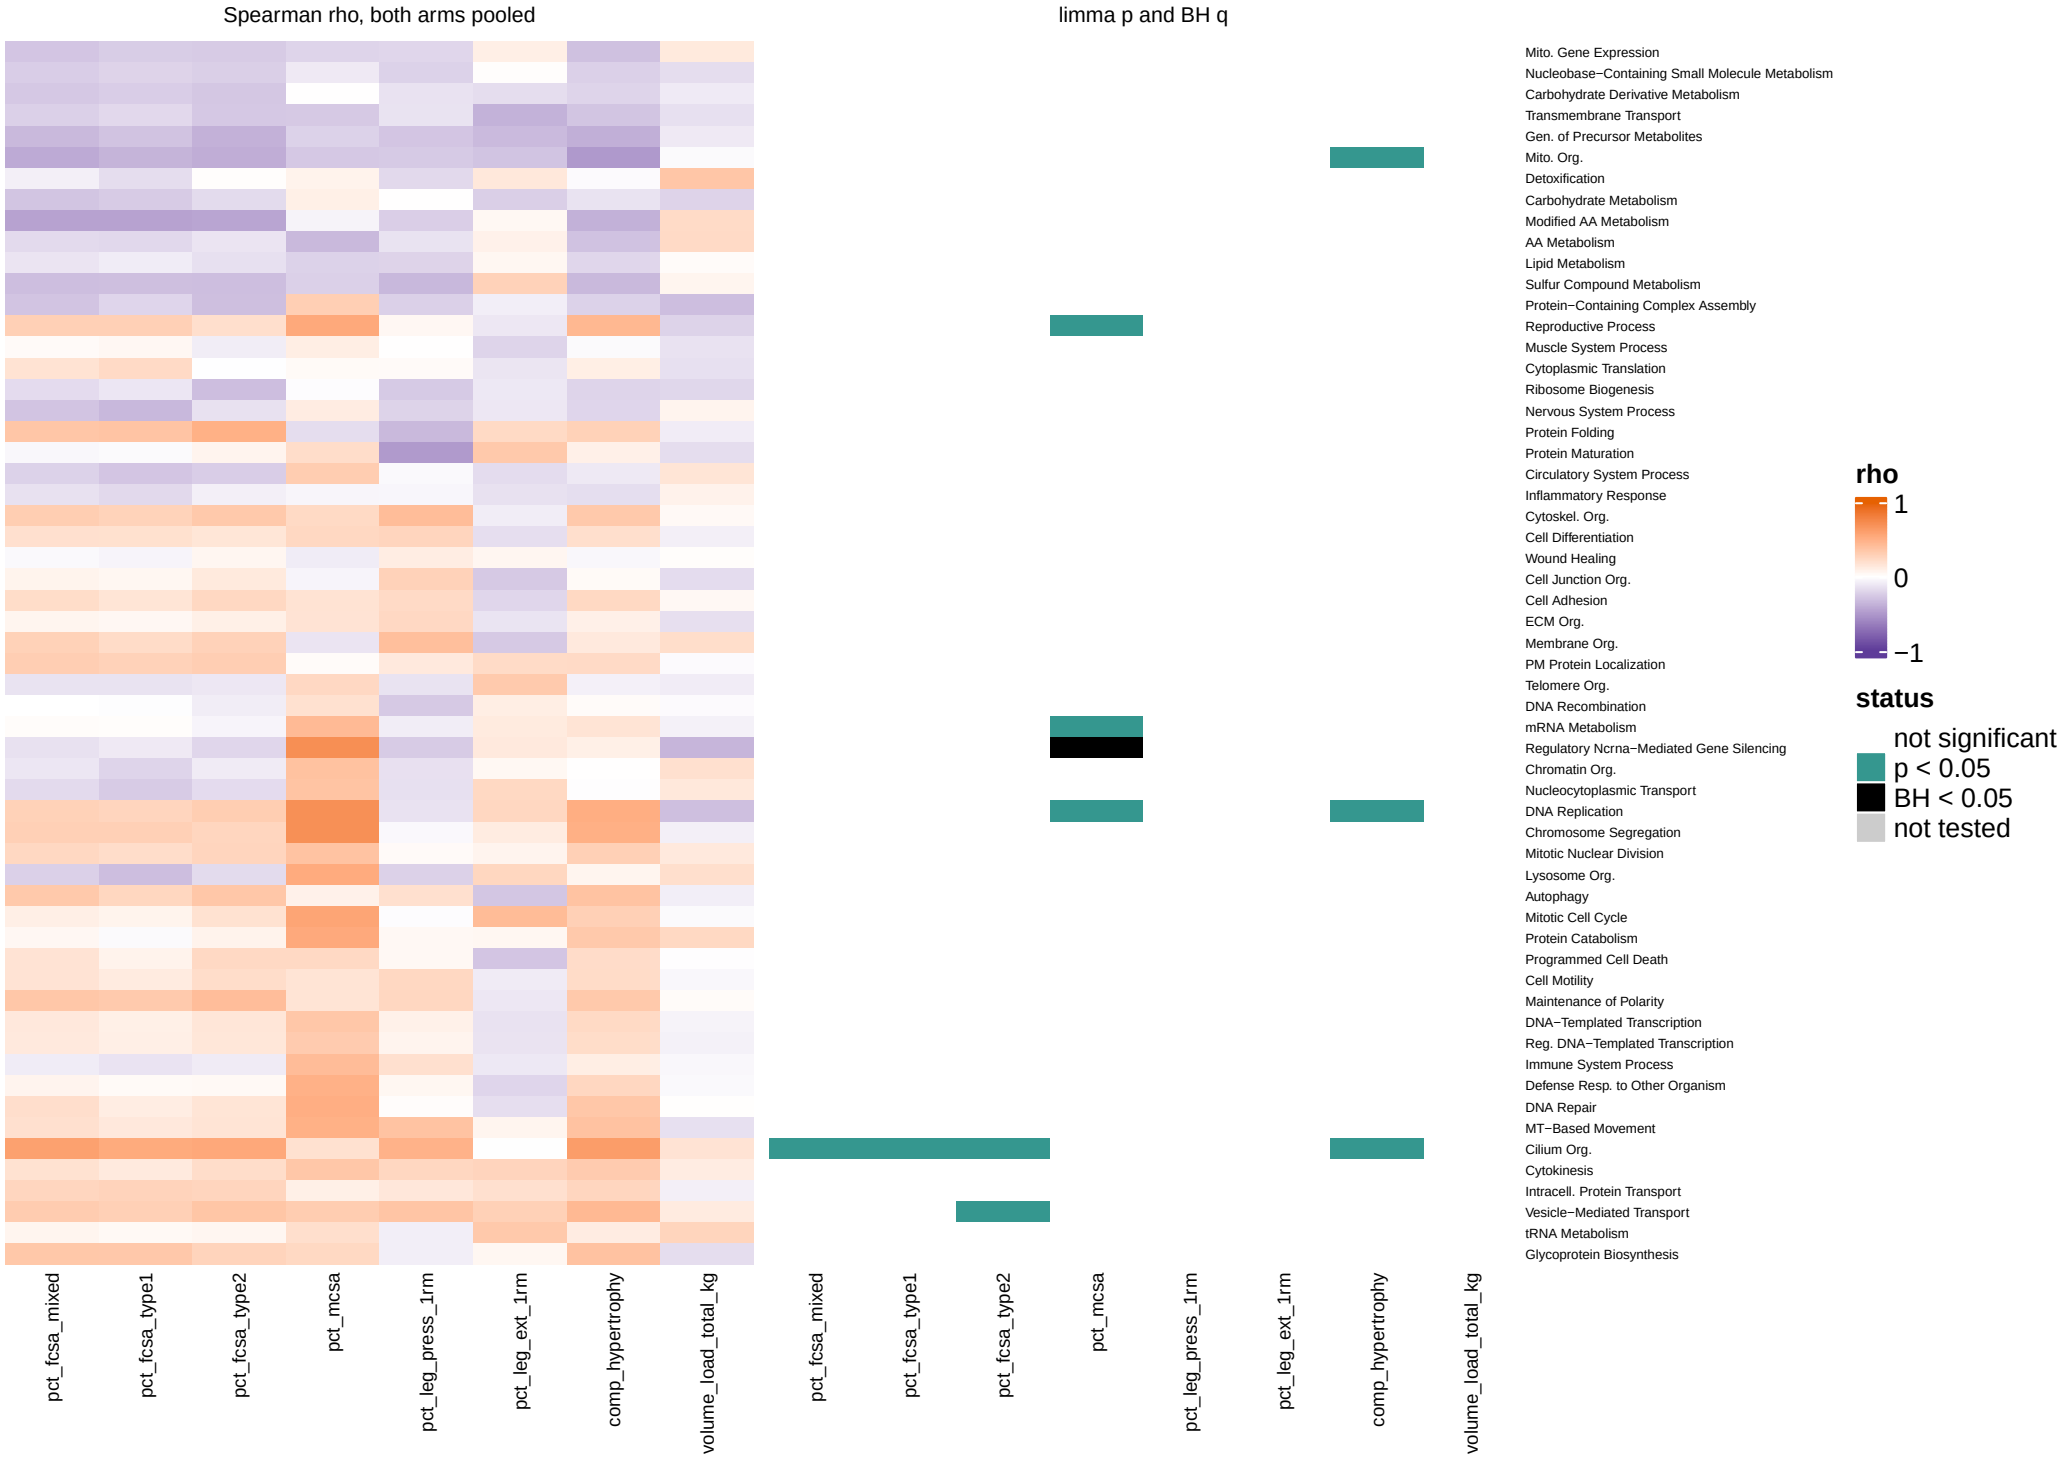


All 58 sets, one row each. Spearman rho between the singscore (change, T2 to T3) and each trait; status from limma. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/set_trait_associations.xlsx, change_score.

Change score overview, baseline_level window: GO_Slim

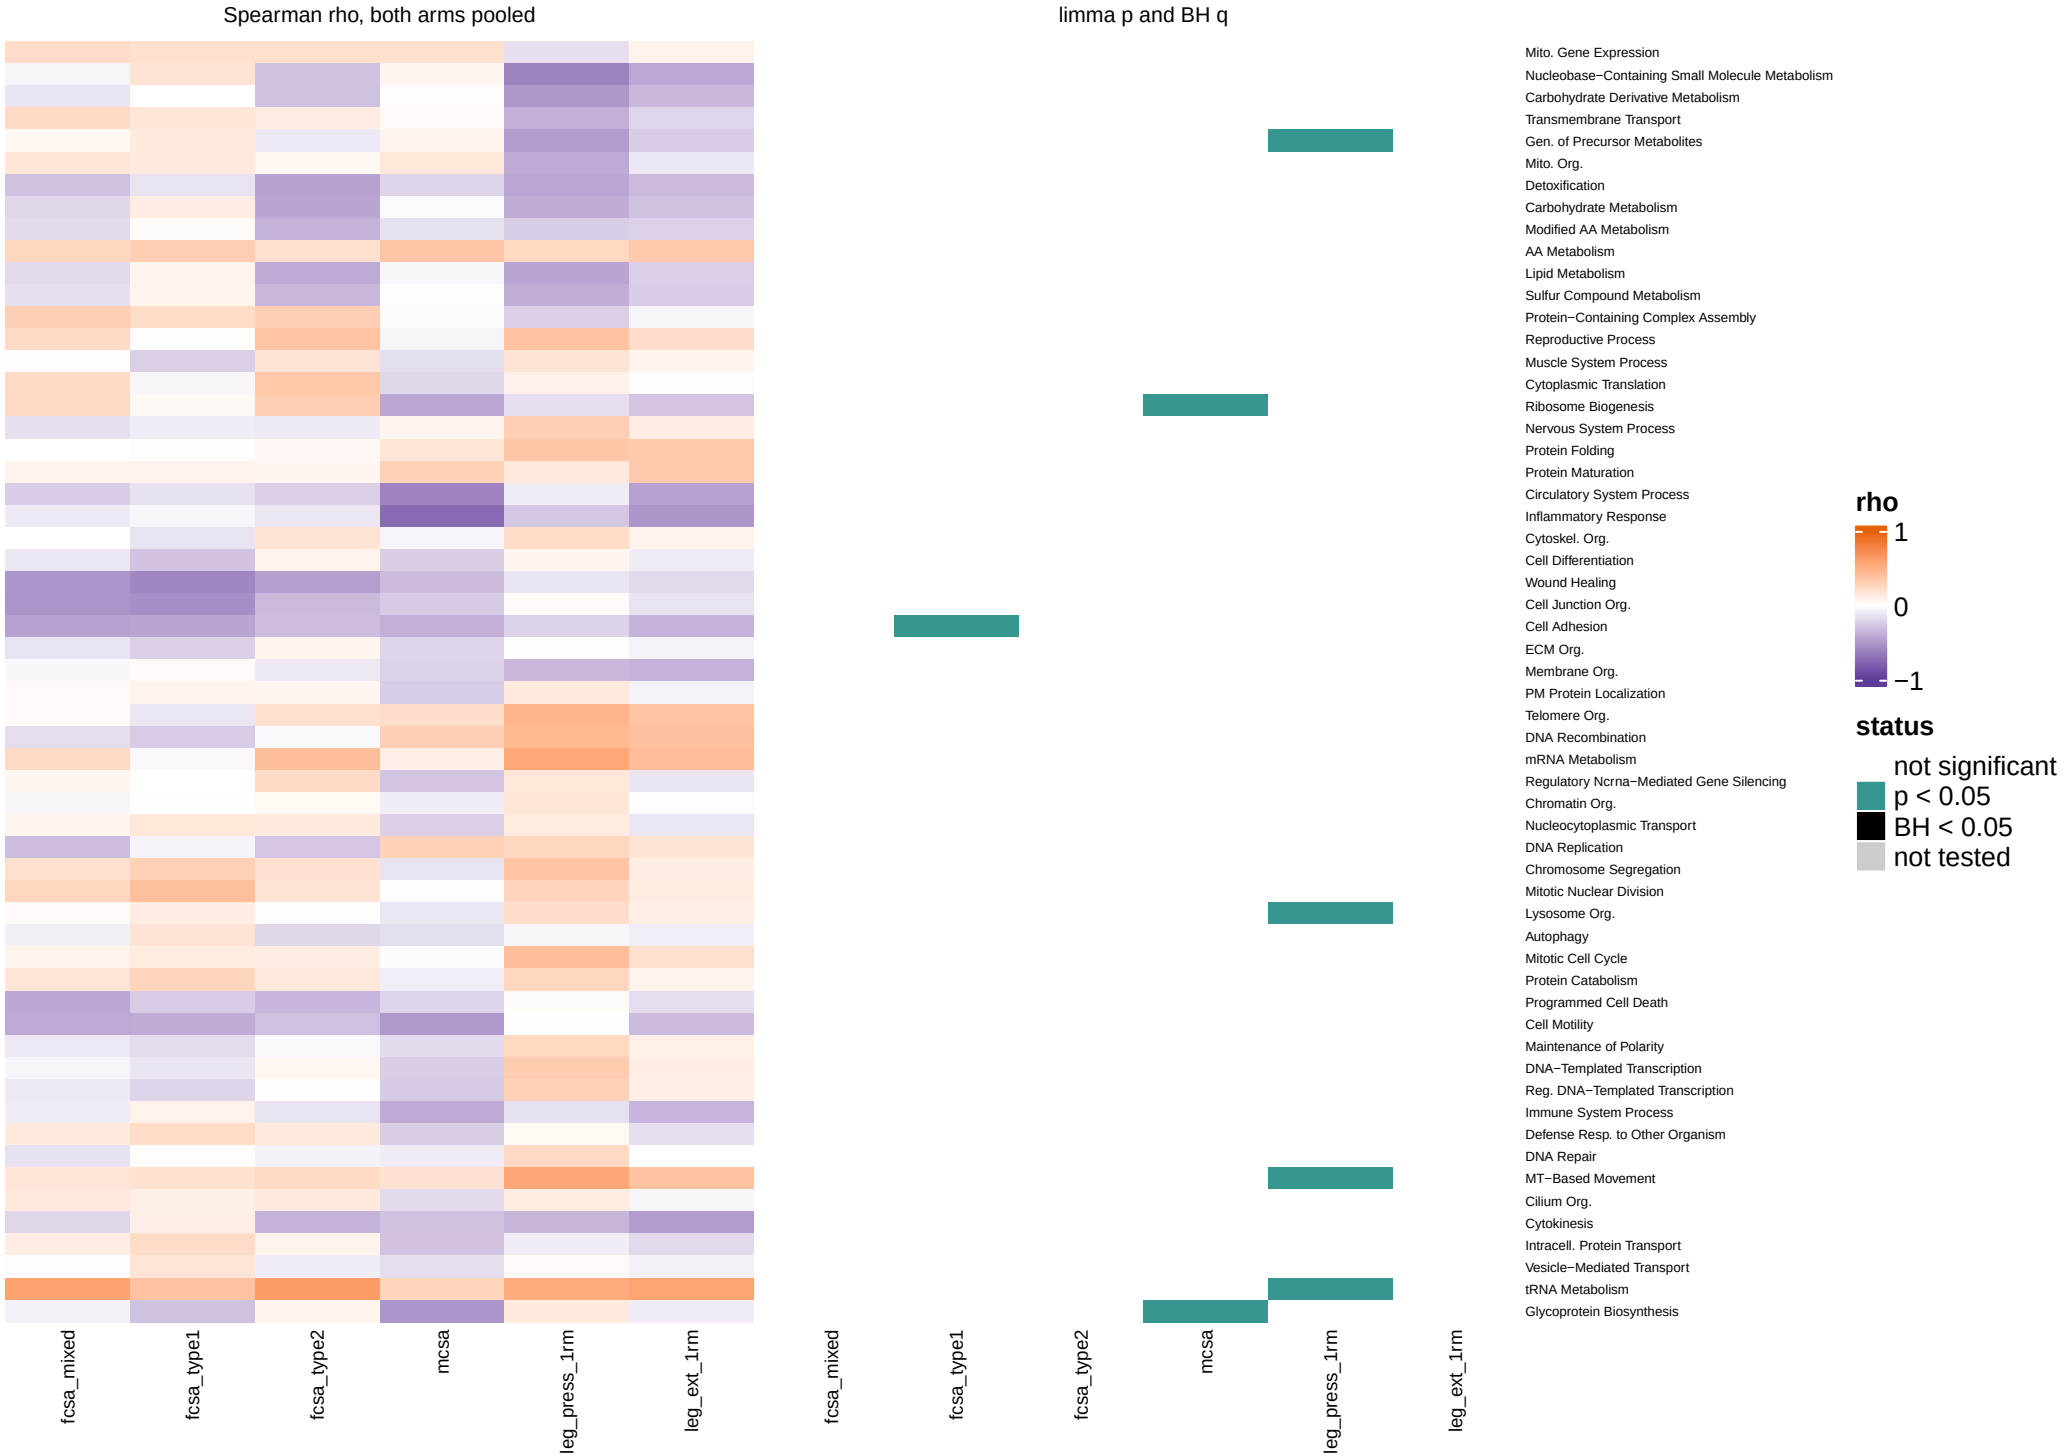


All 58 sets, one row each. Spearman rho between the singscore (T1 level) and each trait; status from limma. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/set_trait_associations.xlsx, change_score.

Change score overview, post_level window: GO_Slim

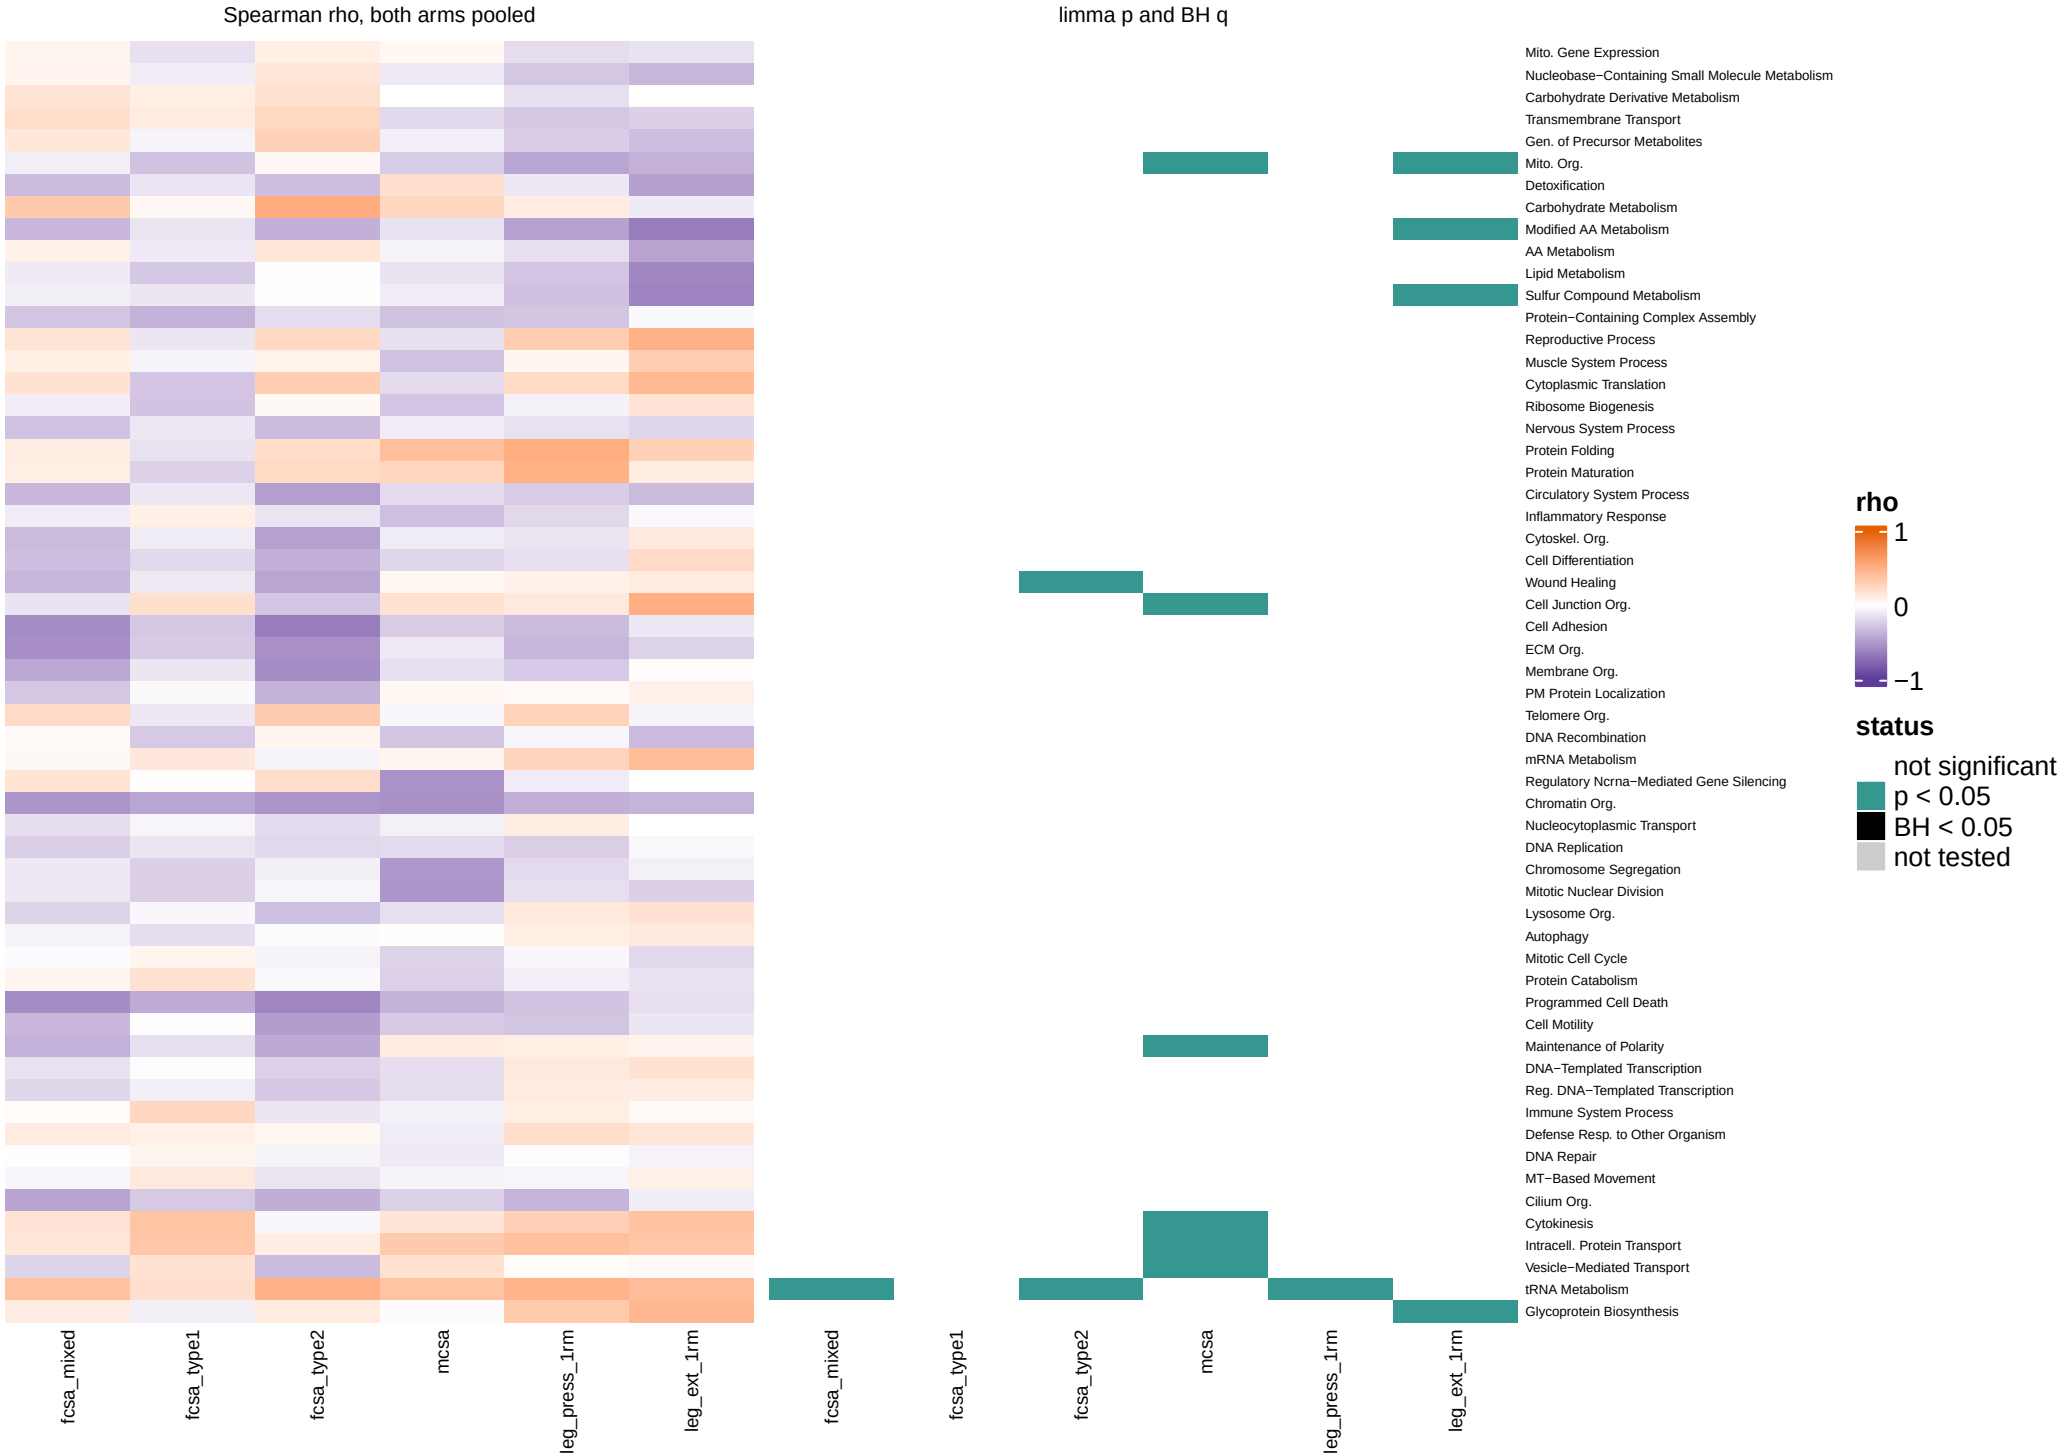

All 58 sets, one row each. Spearman rho between the singscore (T2 level) and each trait; status from limma. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/set_trait_associations.xlsx, change_score.


Change score overview, post_bout_level window: GO_Slim

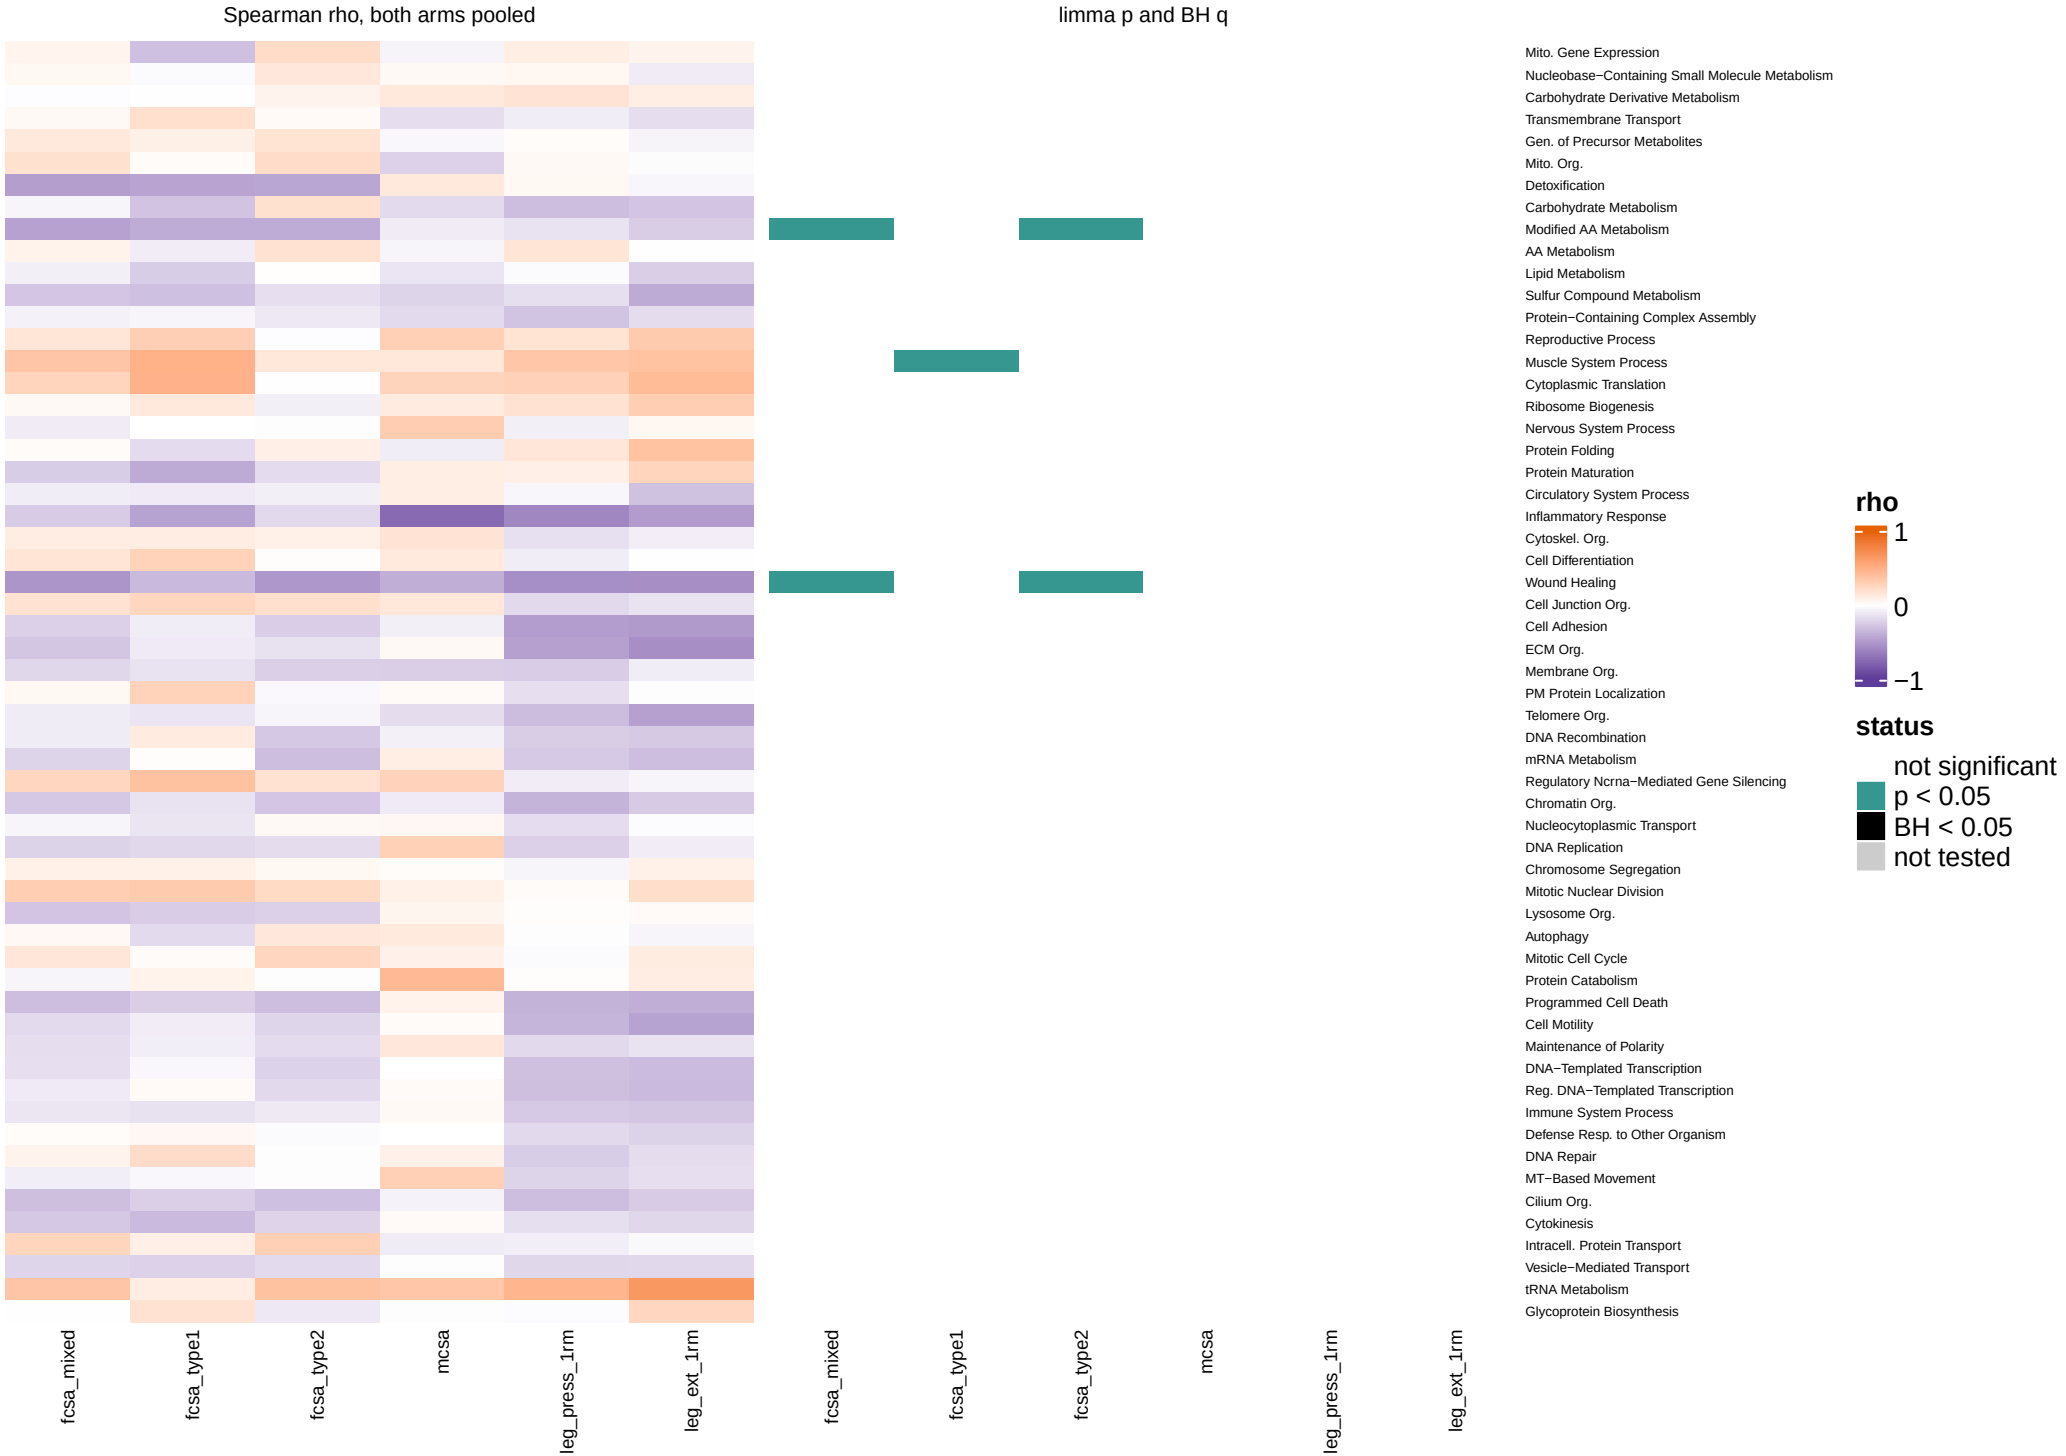

All 58 sets, one row each. Spearman rho between the singscore (T3 level) and each trait; status from limma. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/set_trait_associations.xlsx, change_score.

fcsa_mixed, within−person term


64 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 1 of 2.

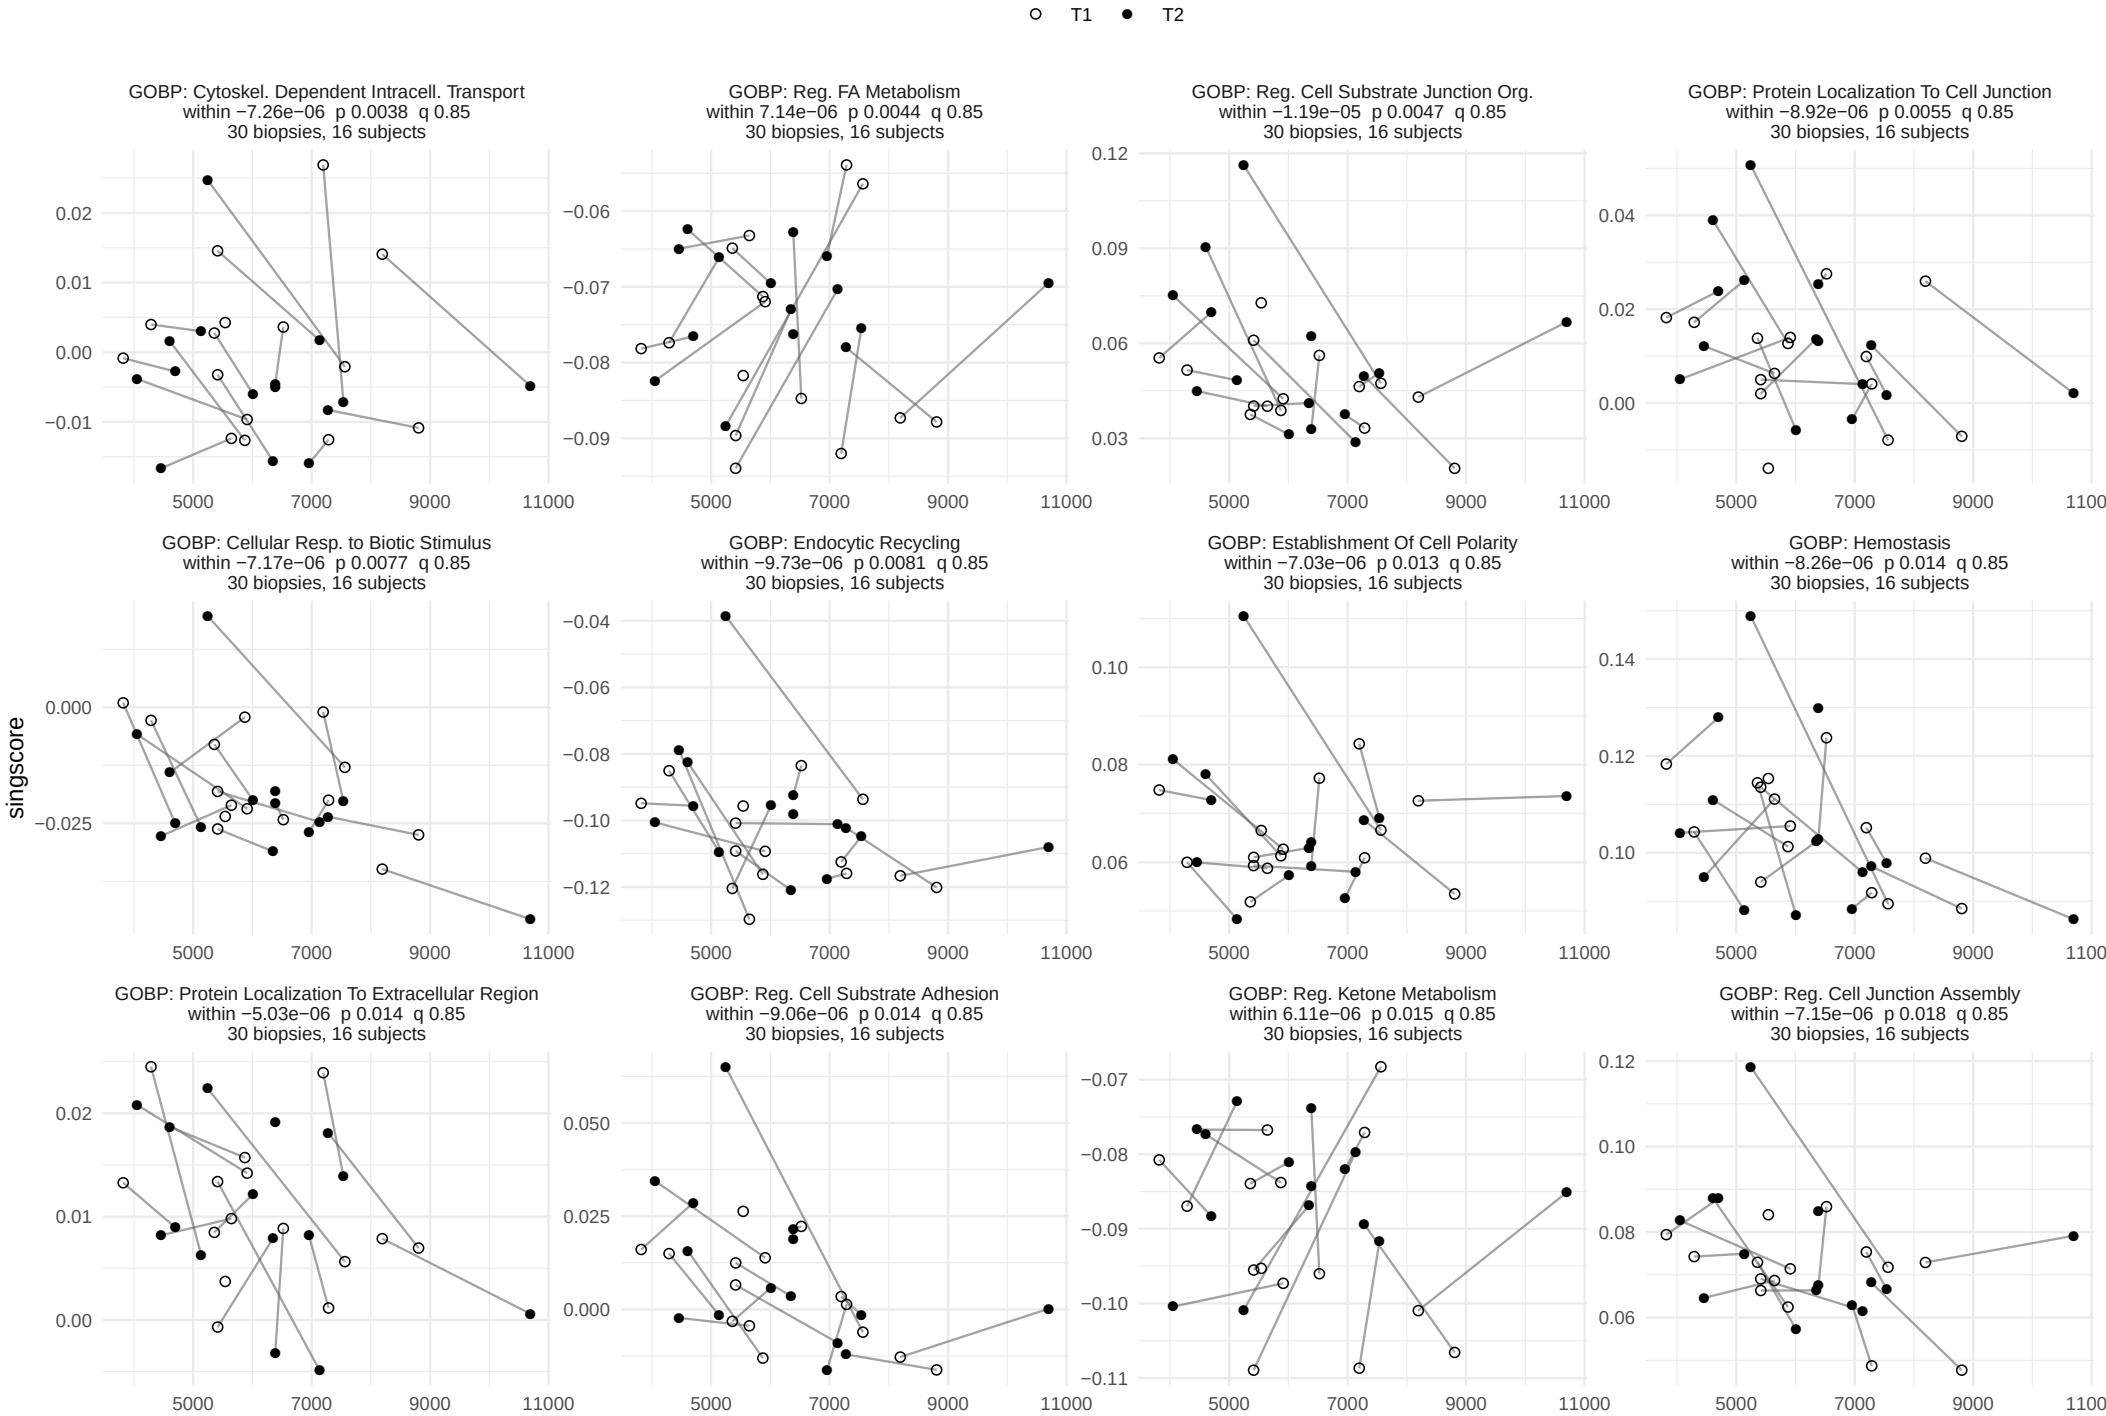

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: slope per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/set_trait_associations.xlsx, model.

fcsa_mixed, within−person term


64 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 2 of 2.

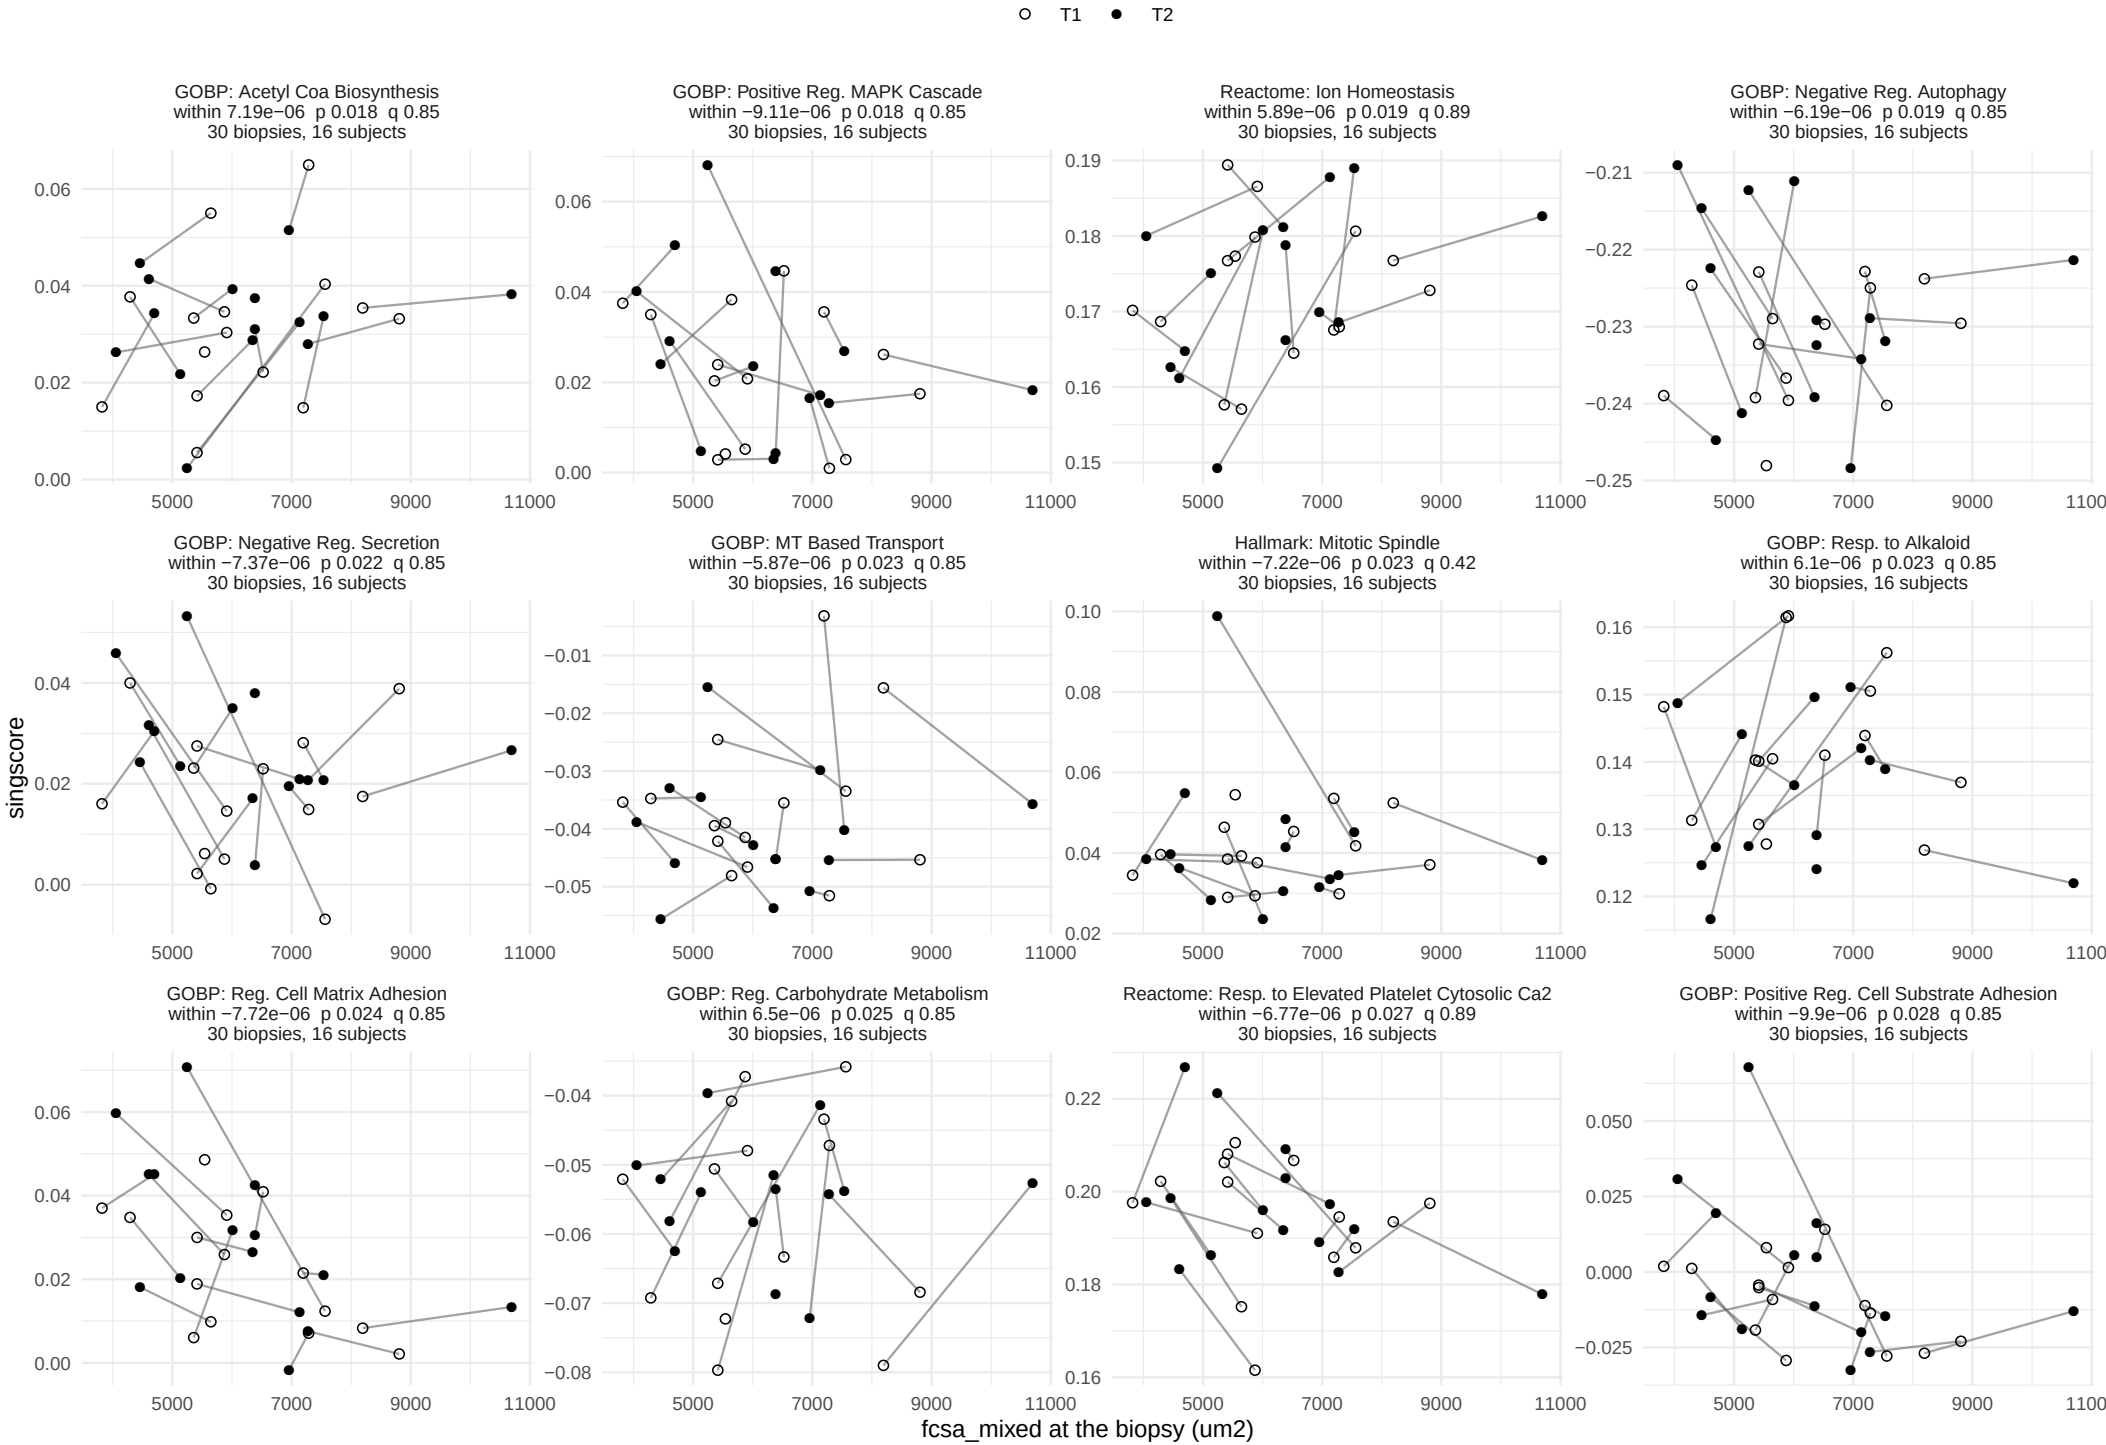

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: slope per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/set_trait_associations.xlsx, model.

fcsa_mixed, between−person term


69 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 1 of 2.

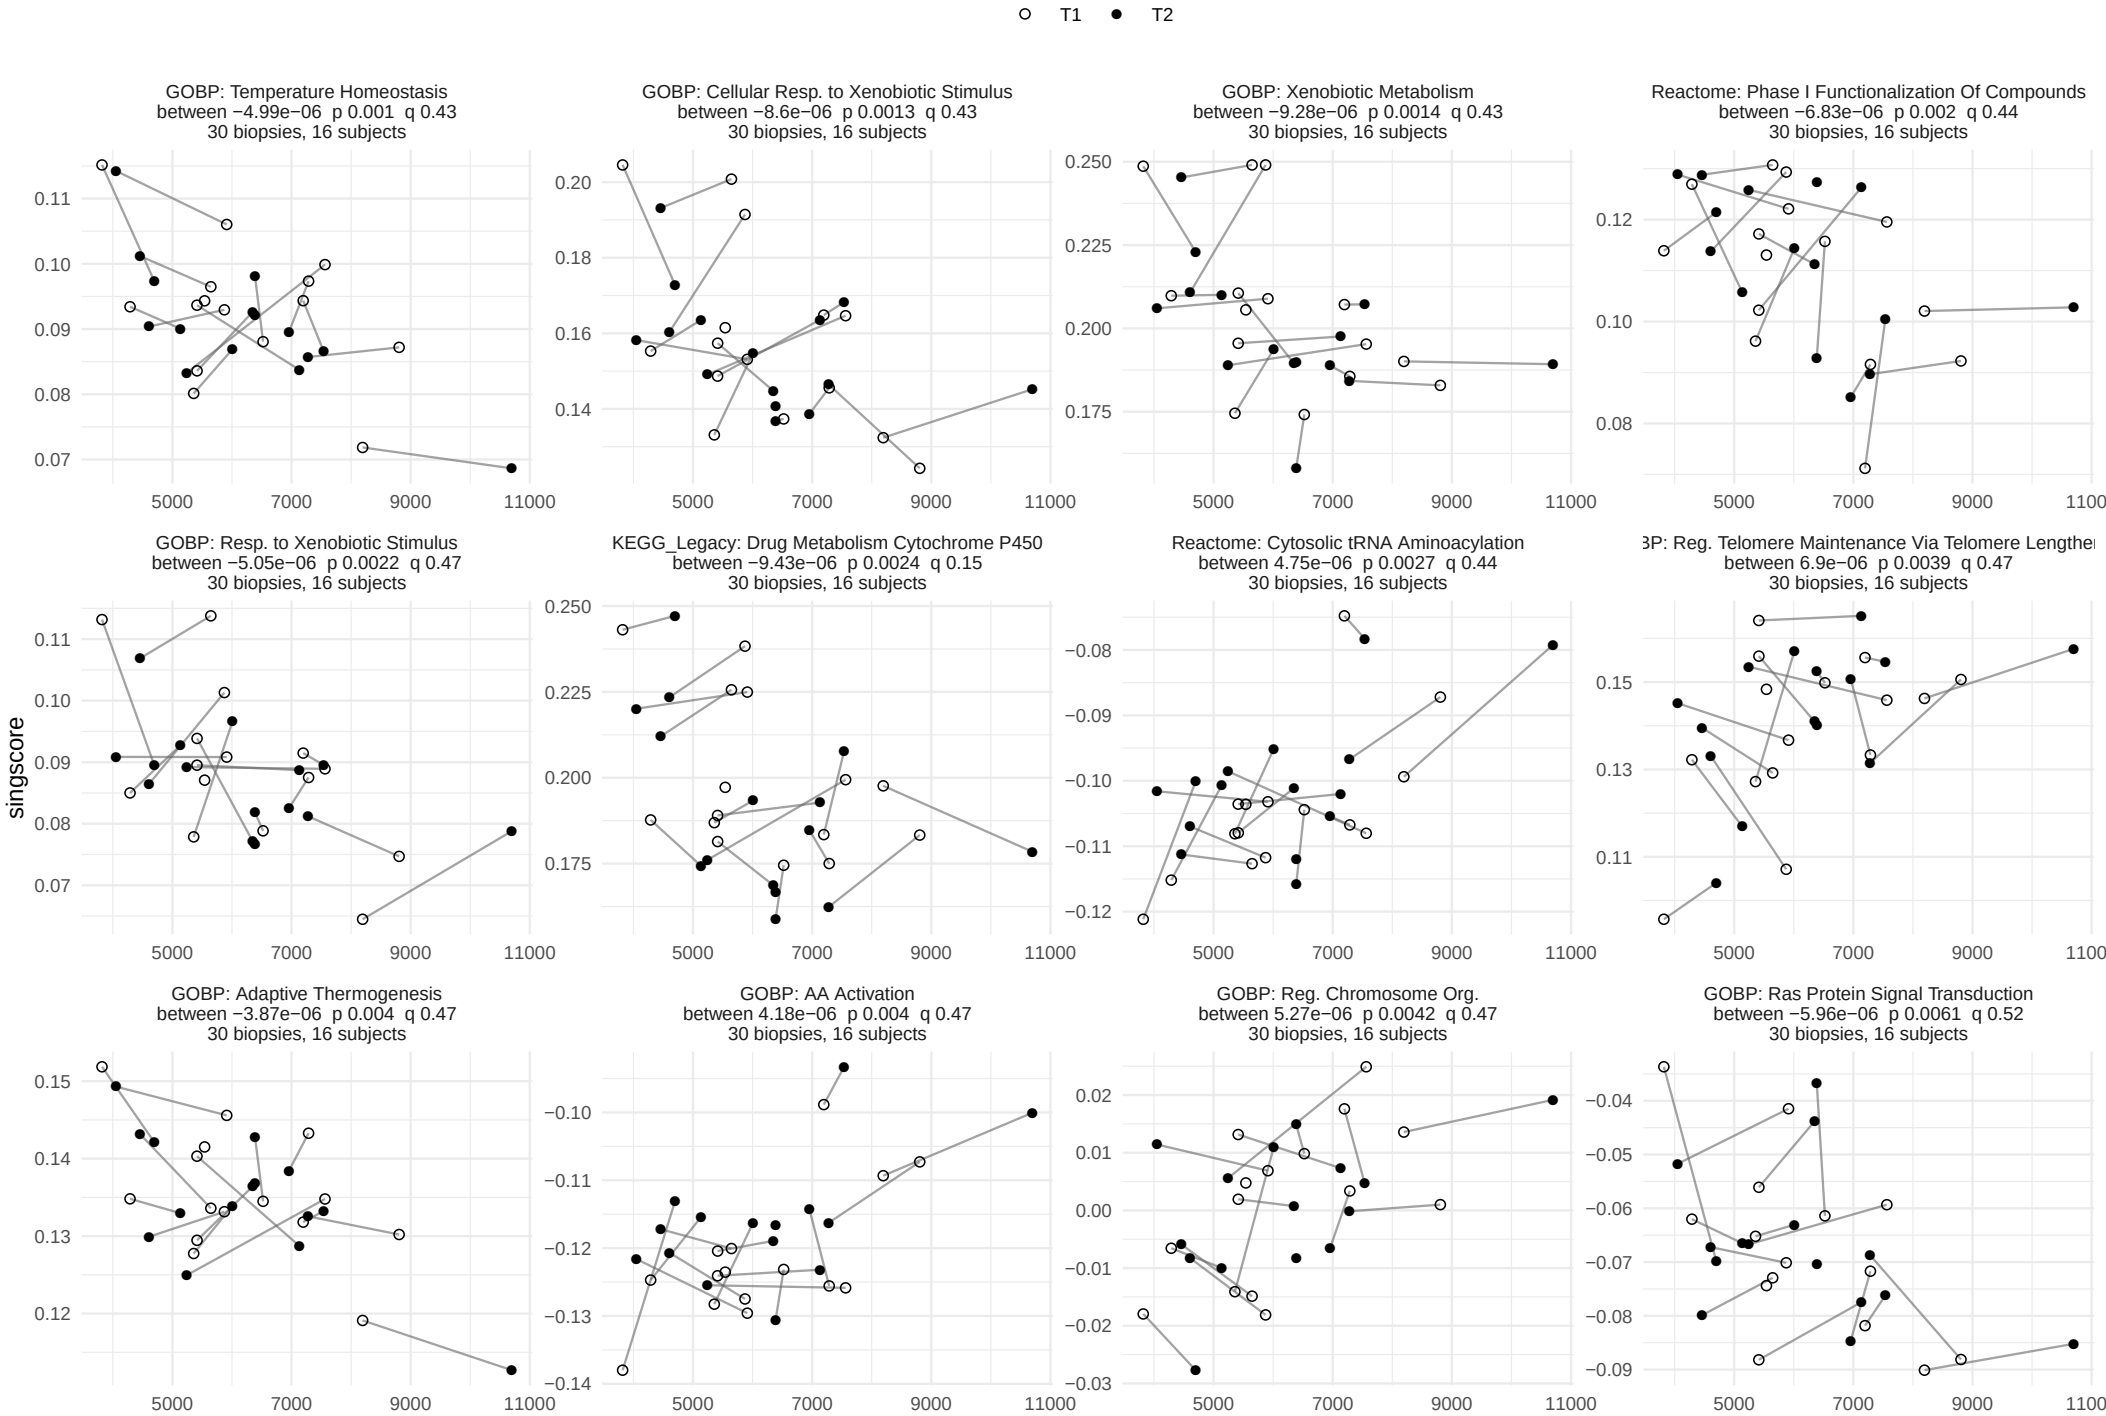

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: slope per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/set_trait_associations.xlsx, model.

fcsa_mixed, between−person term


69 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 2 of 2.

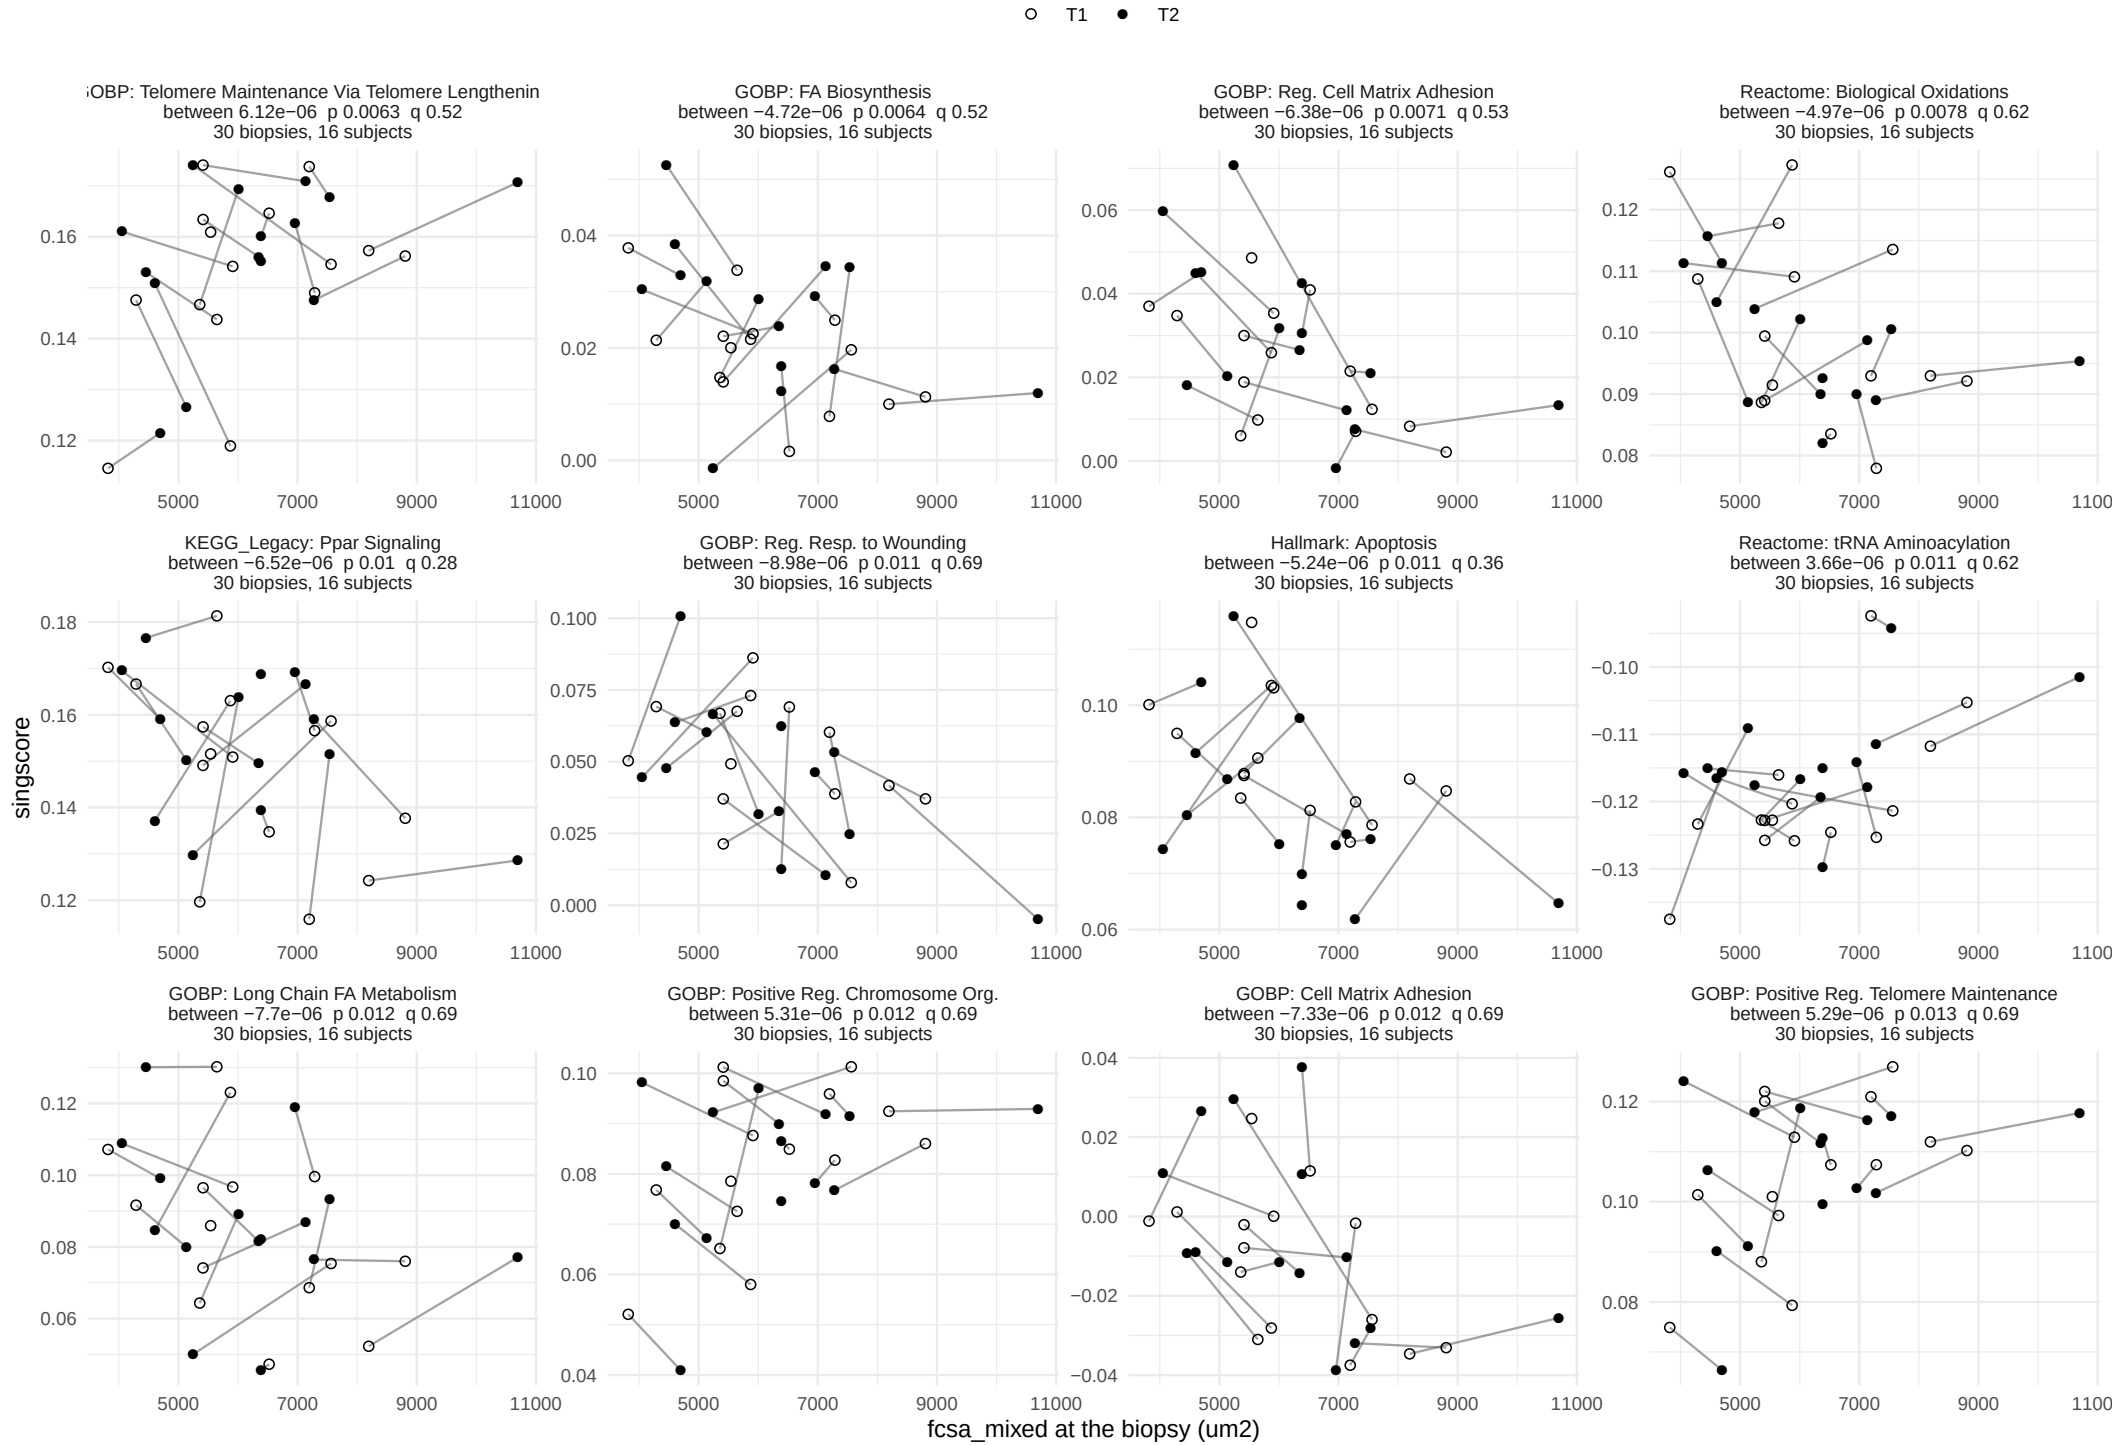

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: slope per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/set_trait_associations.xlsx, model.

fcsa_type1, within−person term


64 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 1 of 2.

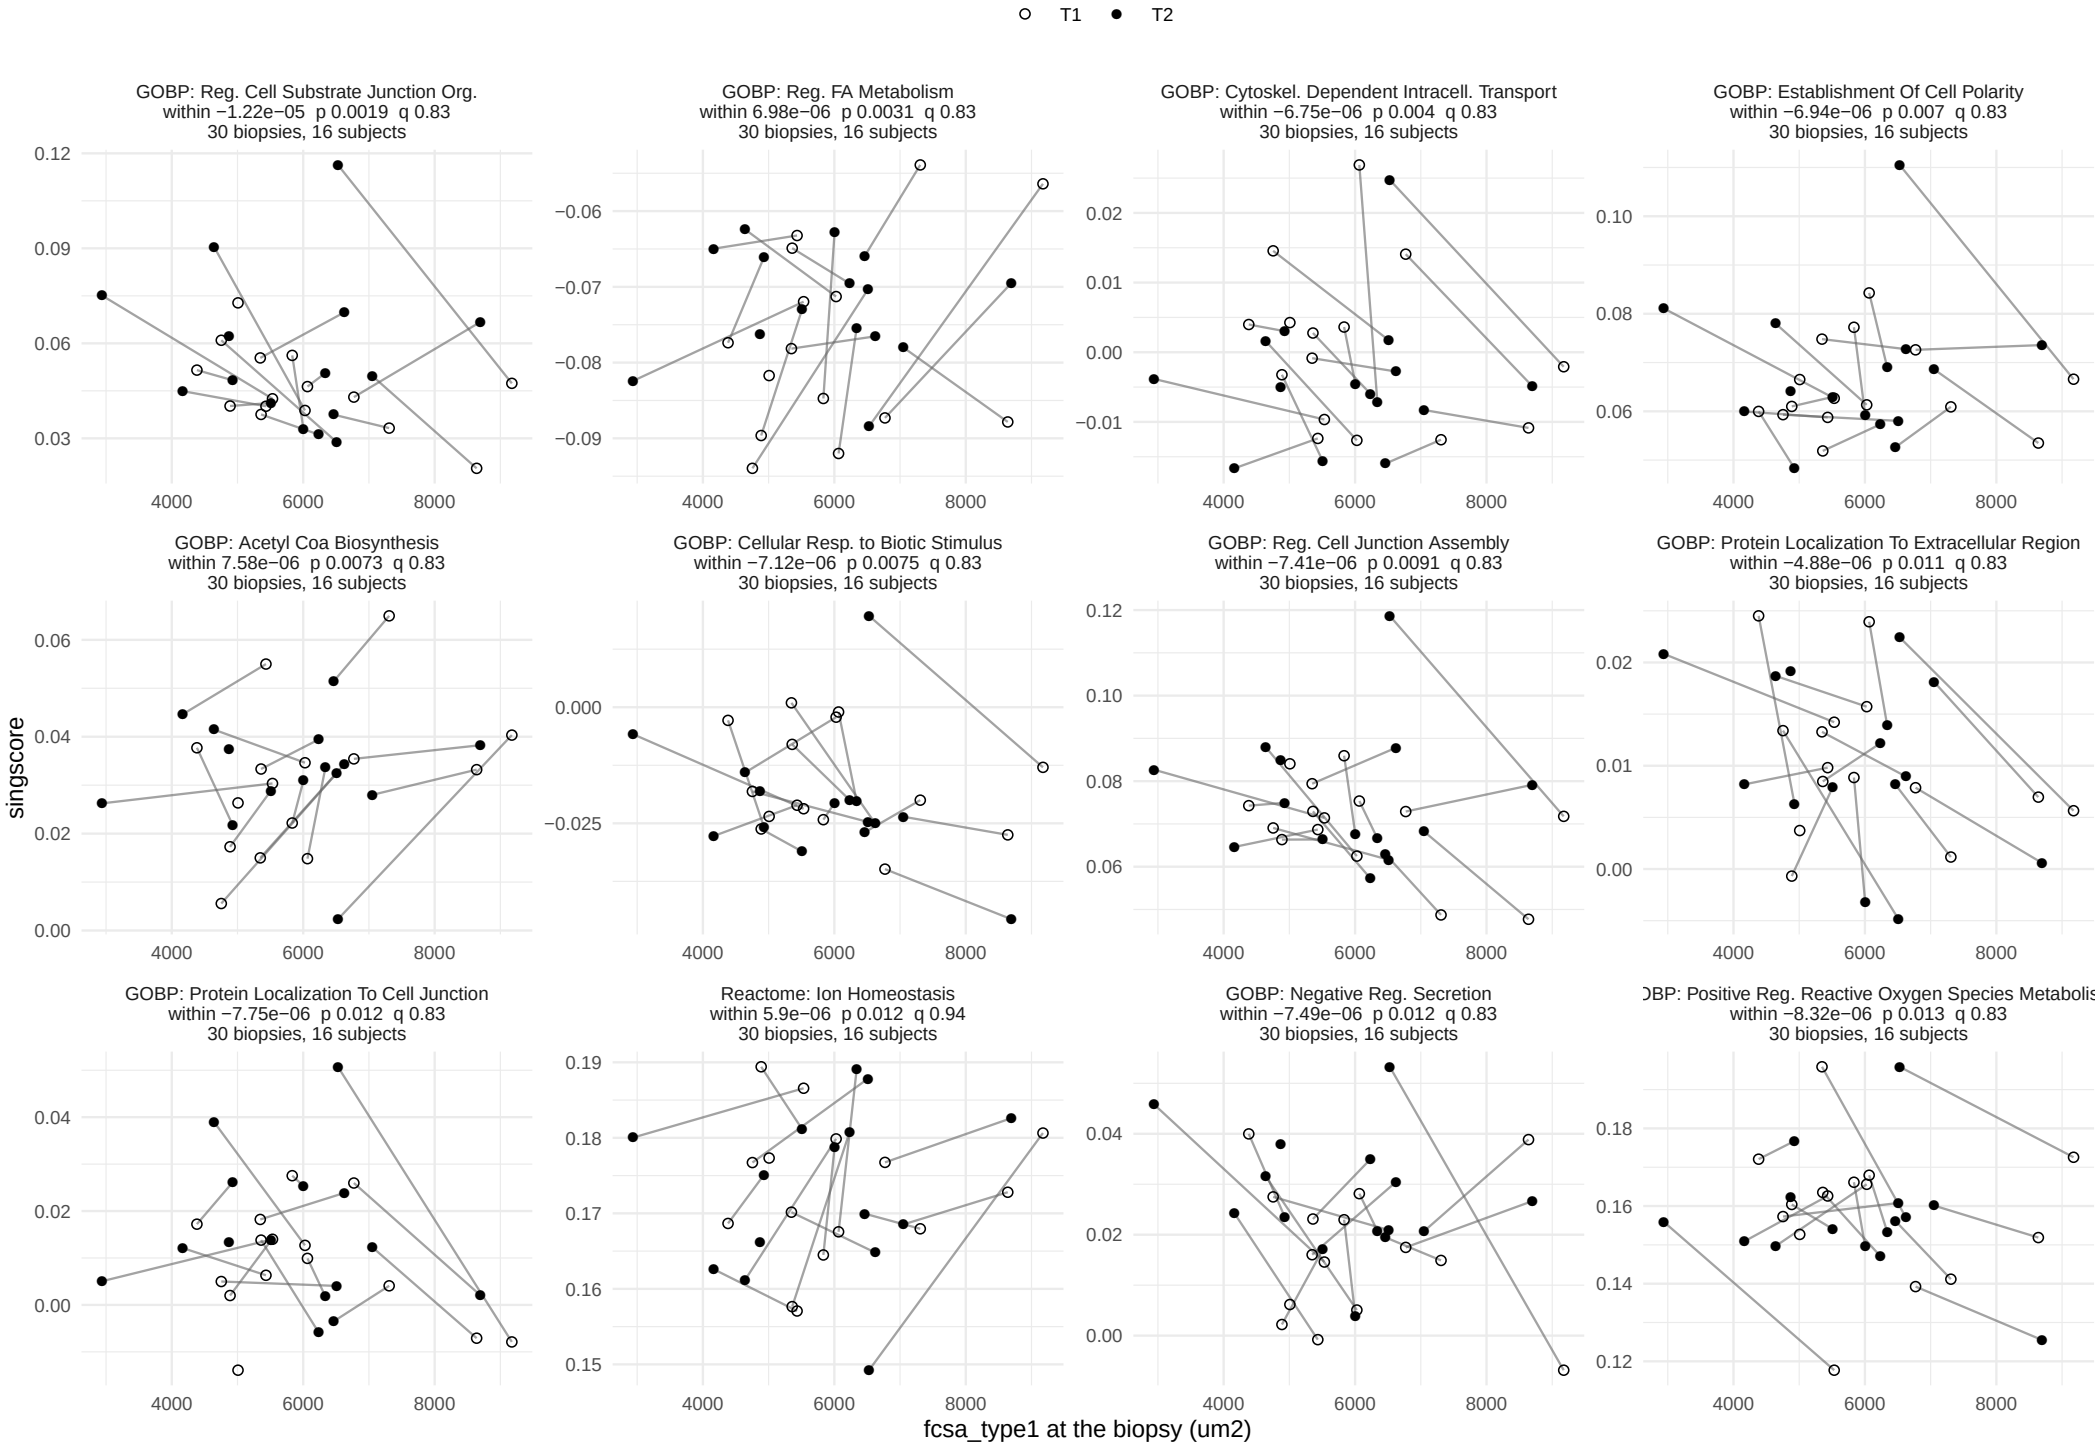

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: slope per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/set_trait_associations.xlsx, model.

fcsa_type1, within−person term


64 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 2 of 2.

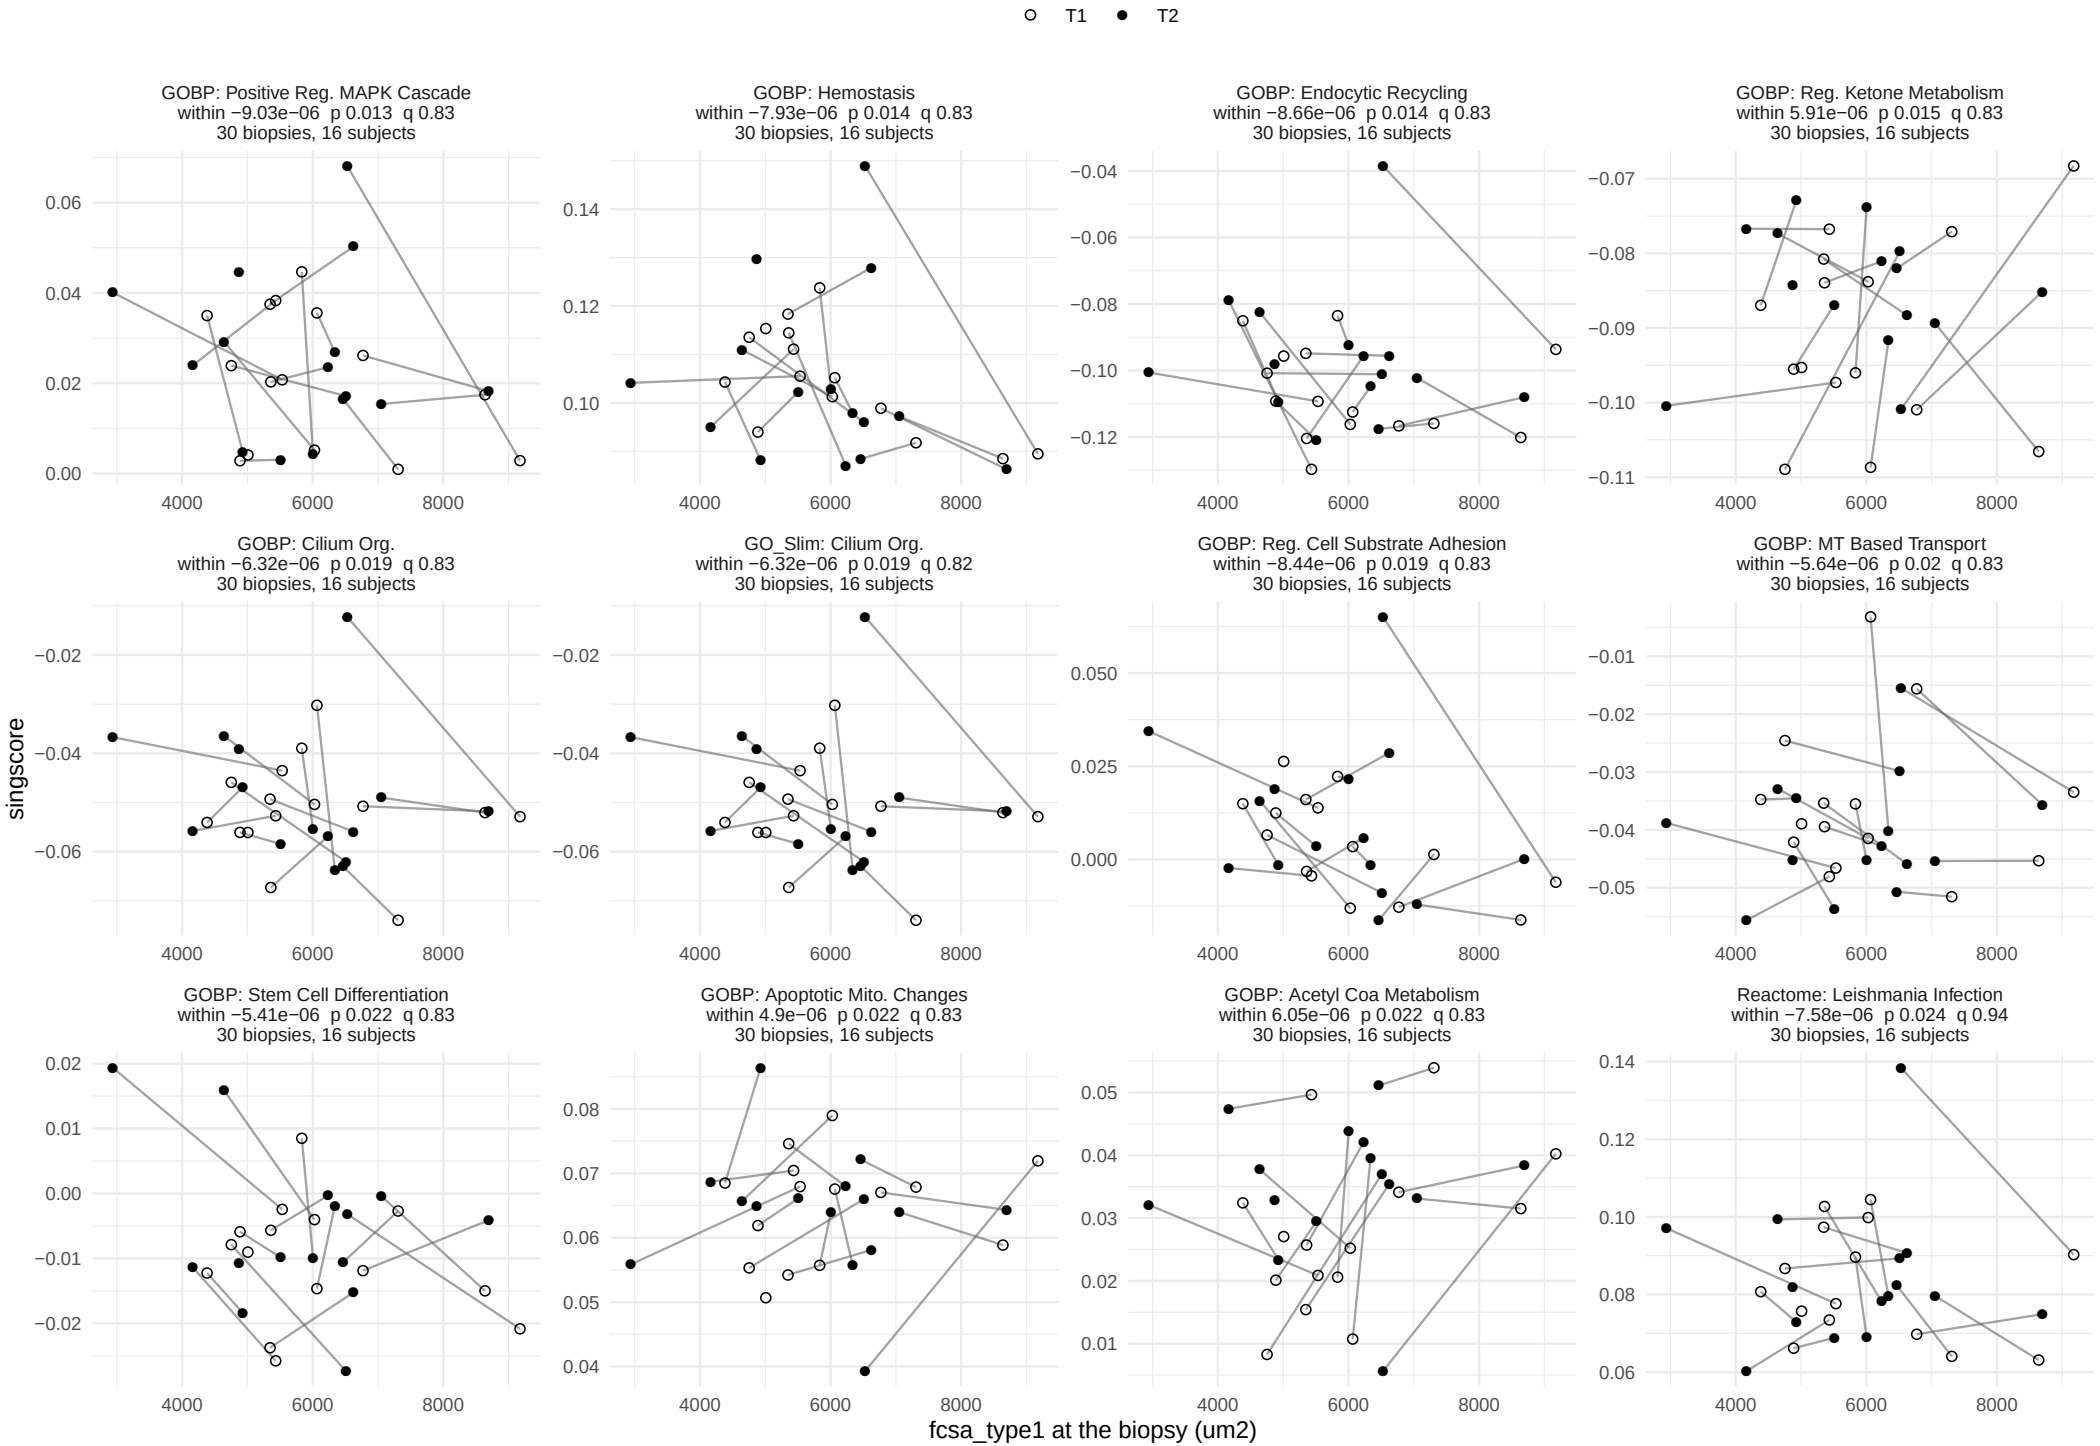

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: slope per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/set_trait_associations.xlsx, model.

fcsa_type1, between−person term


112 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 1 of 2.

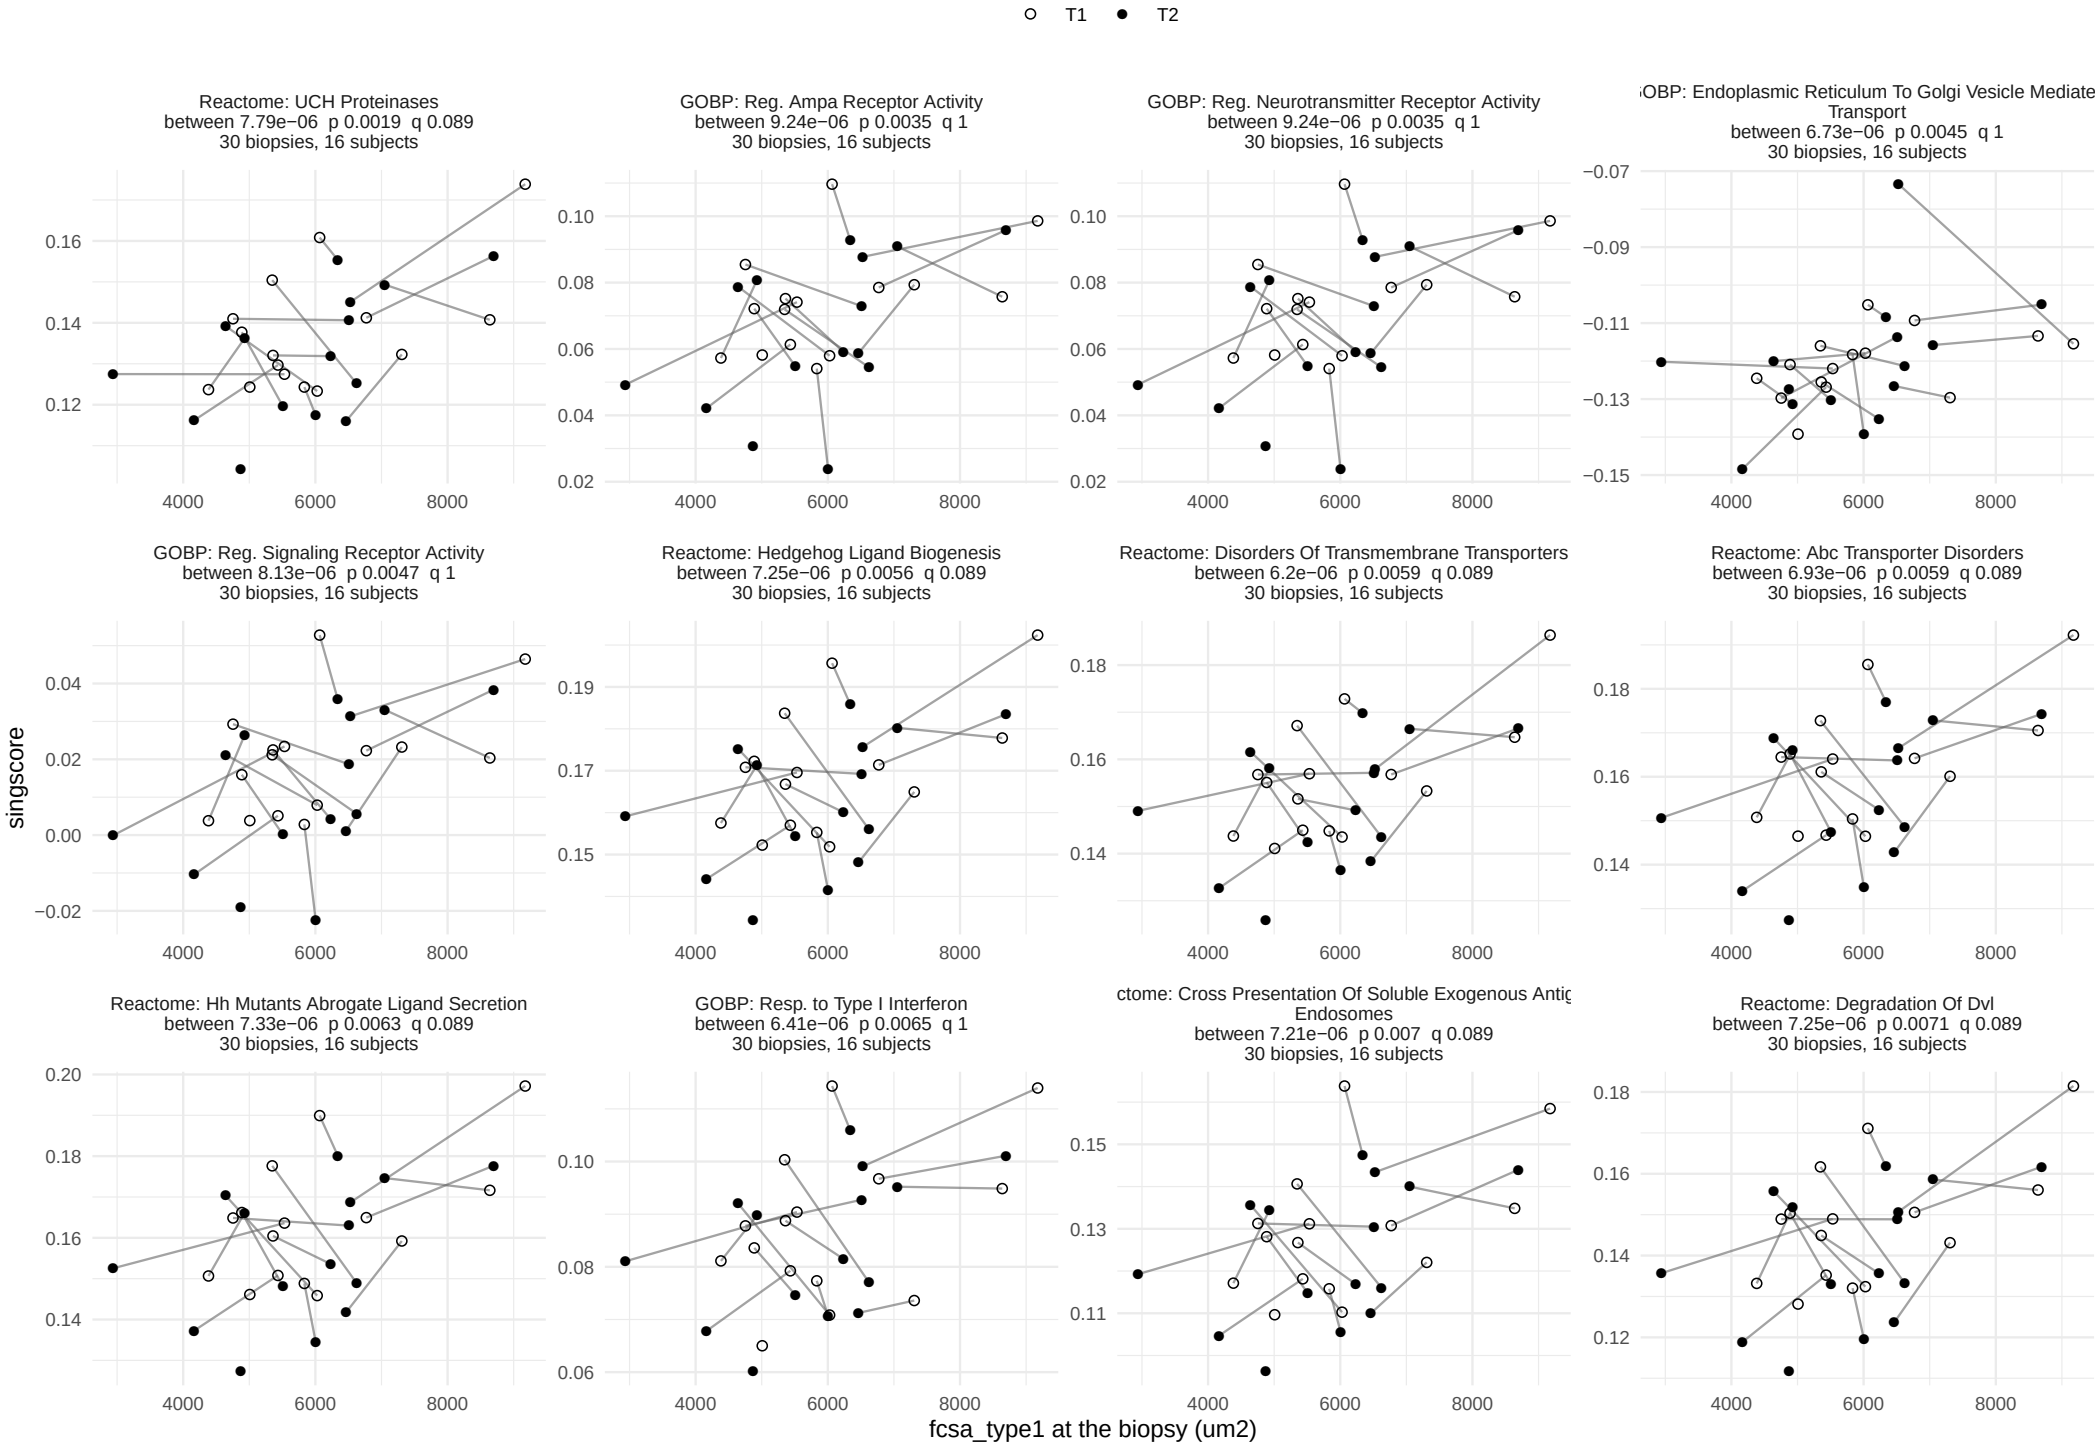

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: slope per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/set_trait_associations.xlsx, model.

fcsa_type1, between−person term


112 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 2 of 2.

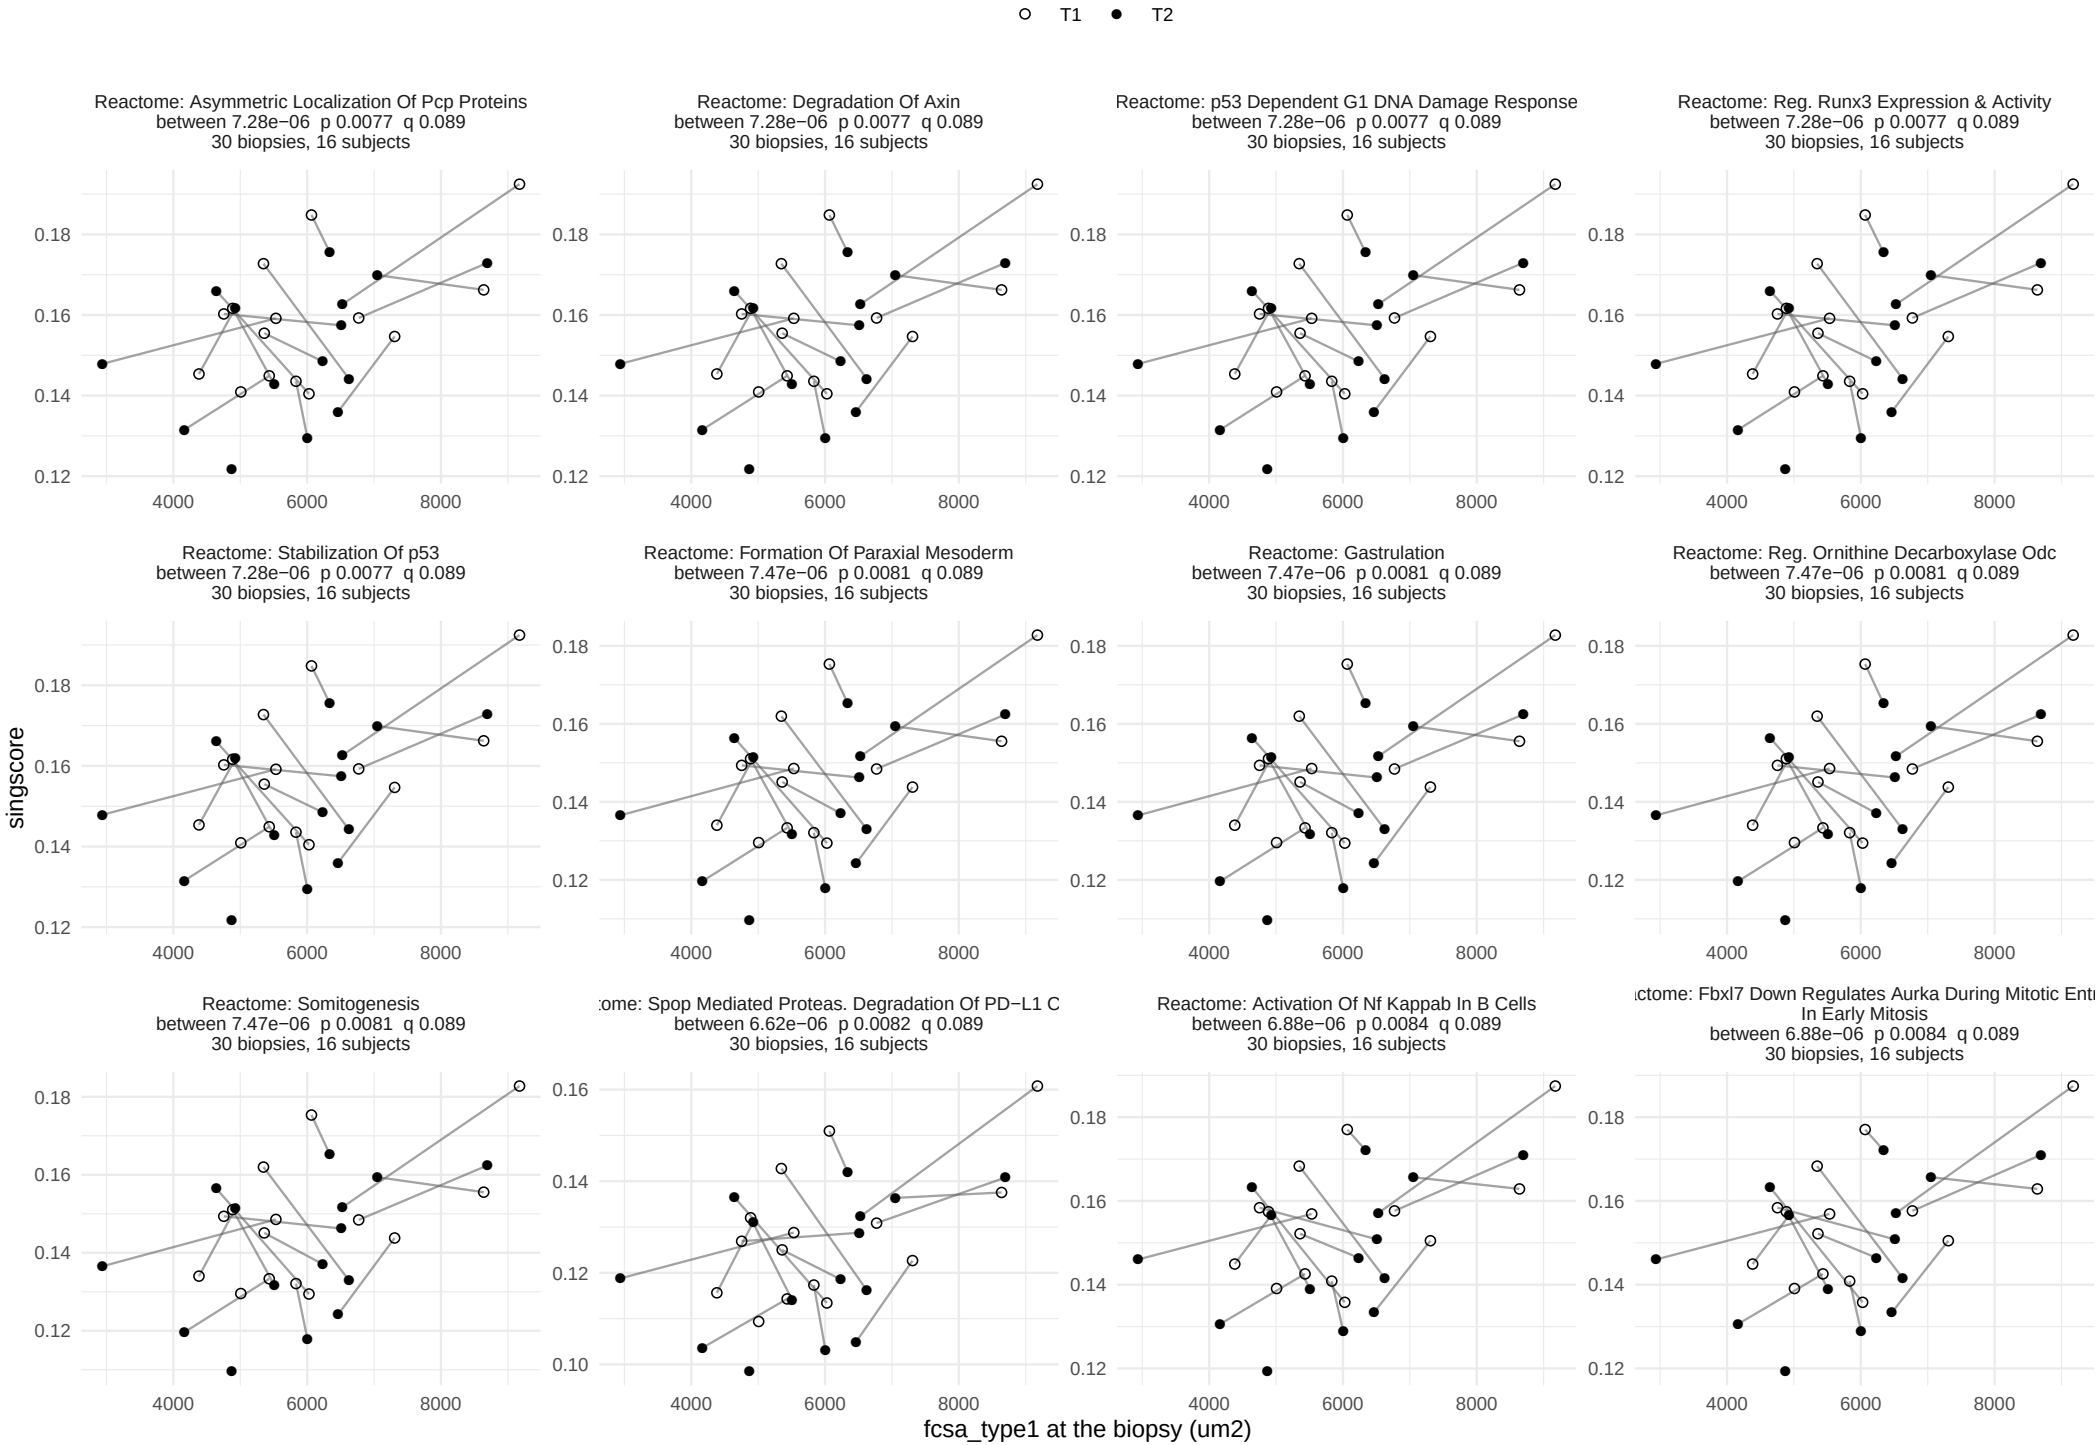

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: slope per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/set_trait_associations.xlsx, model.

fcsa_type2, within−person term


88 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 1 of 2.

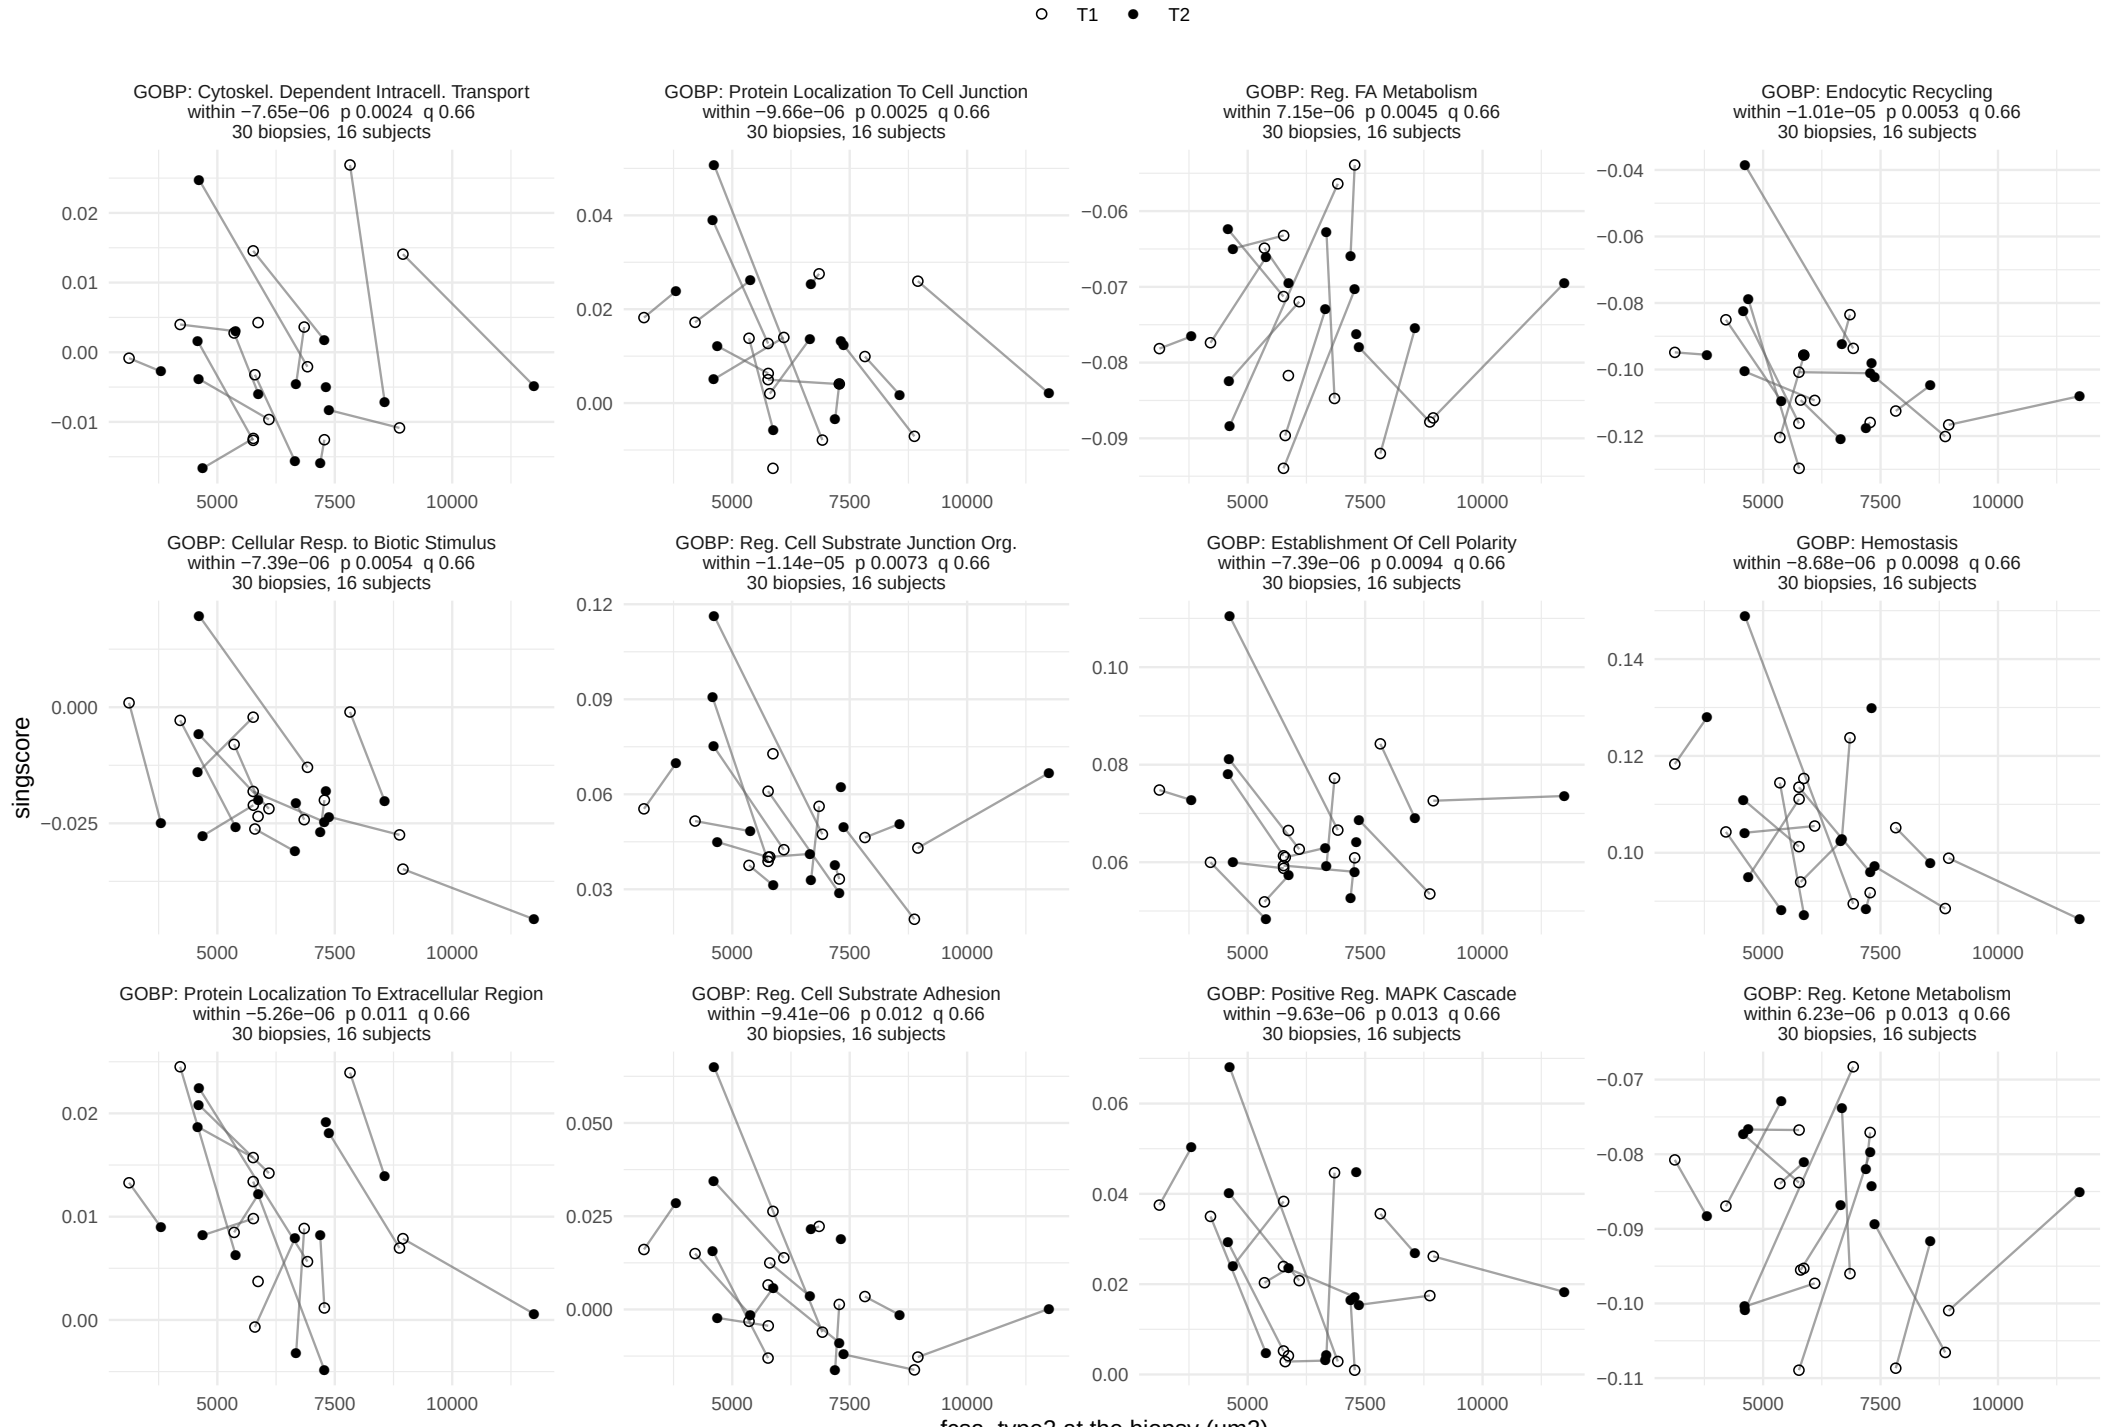

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: slope per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/set_trait_associations.xlsx, model.

fcsa_type2, within−person term


88 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 2 of 2.

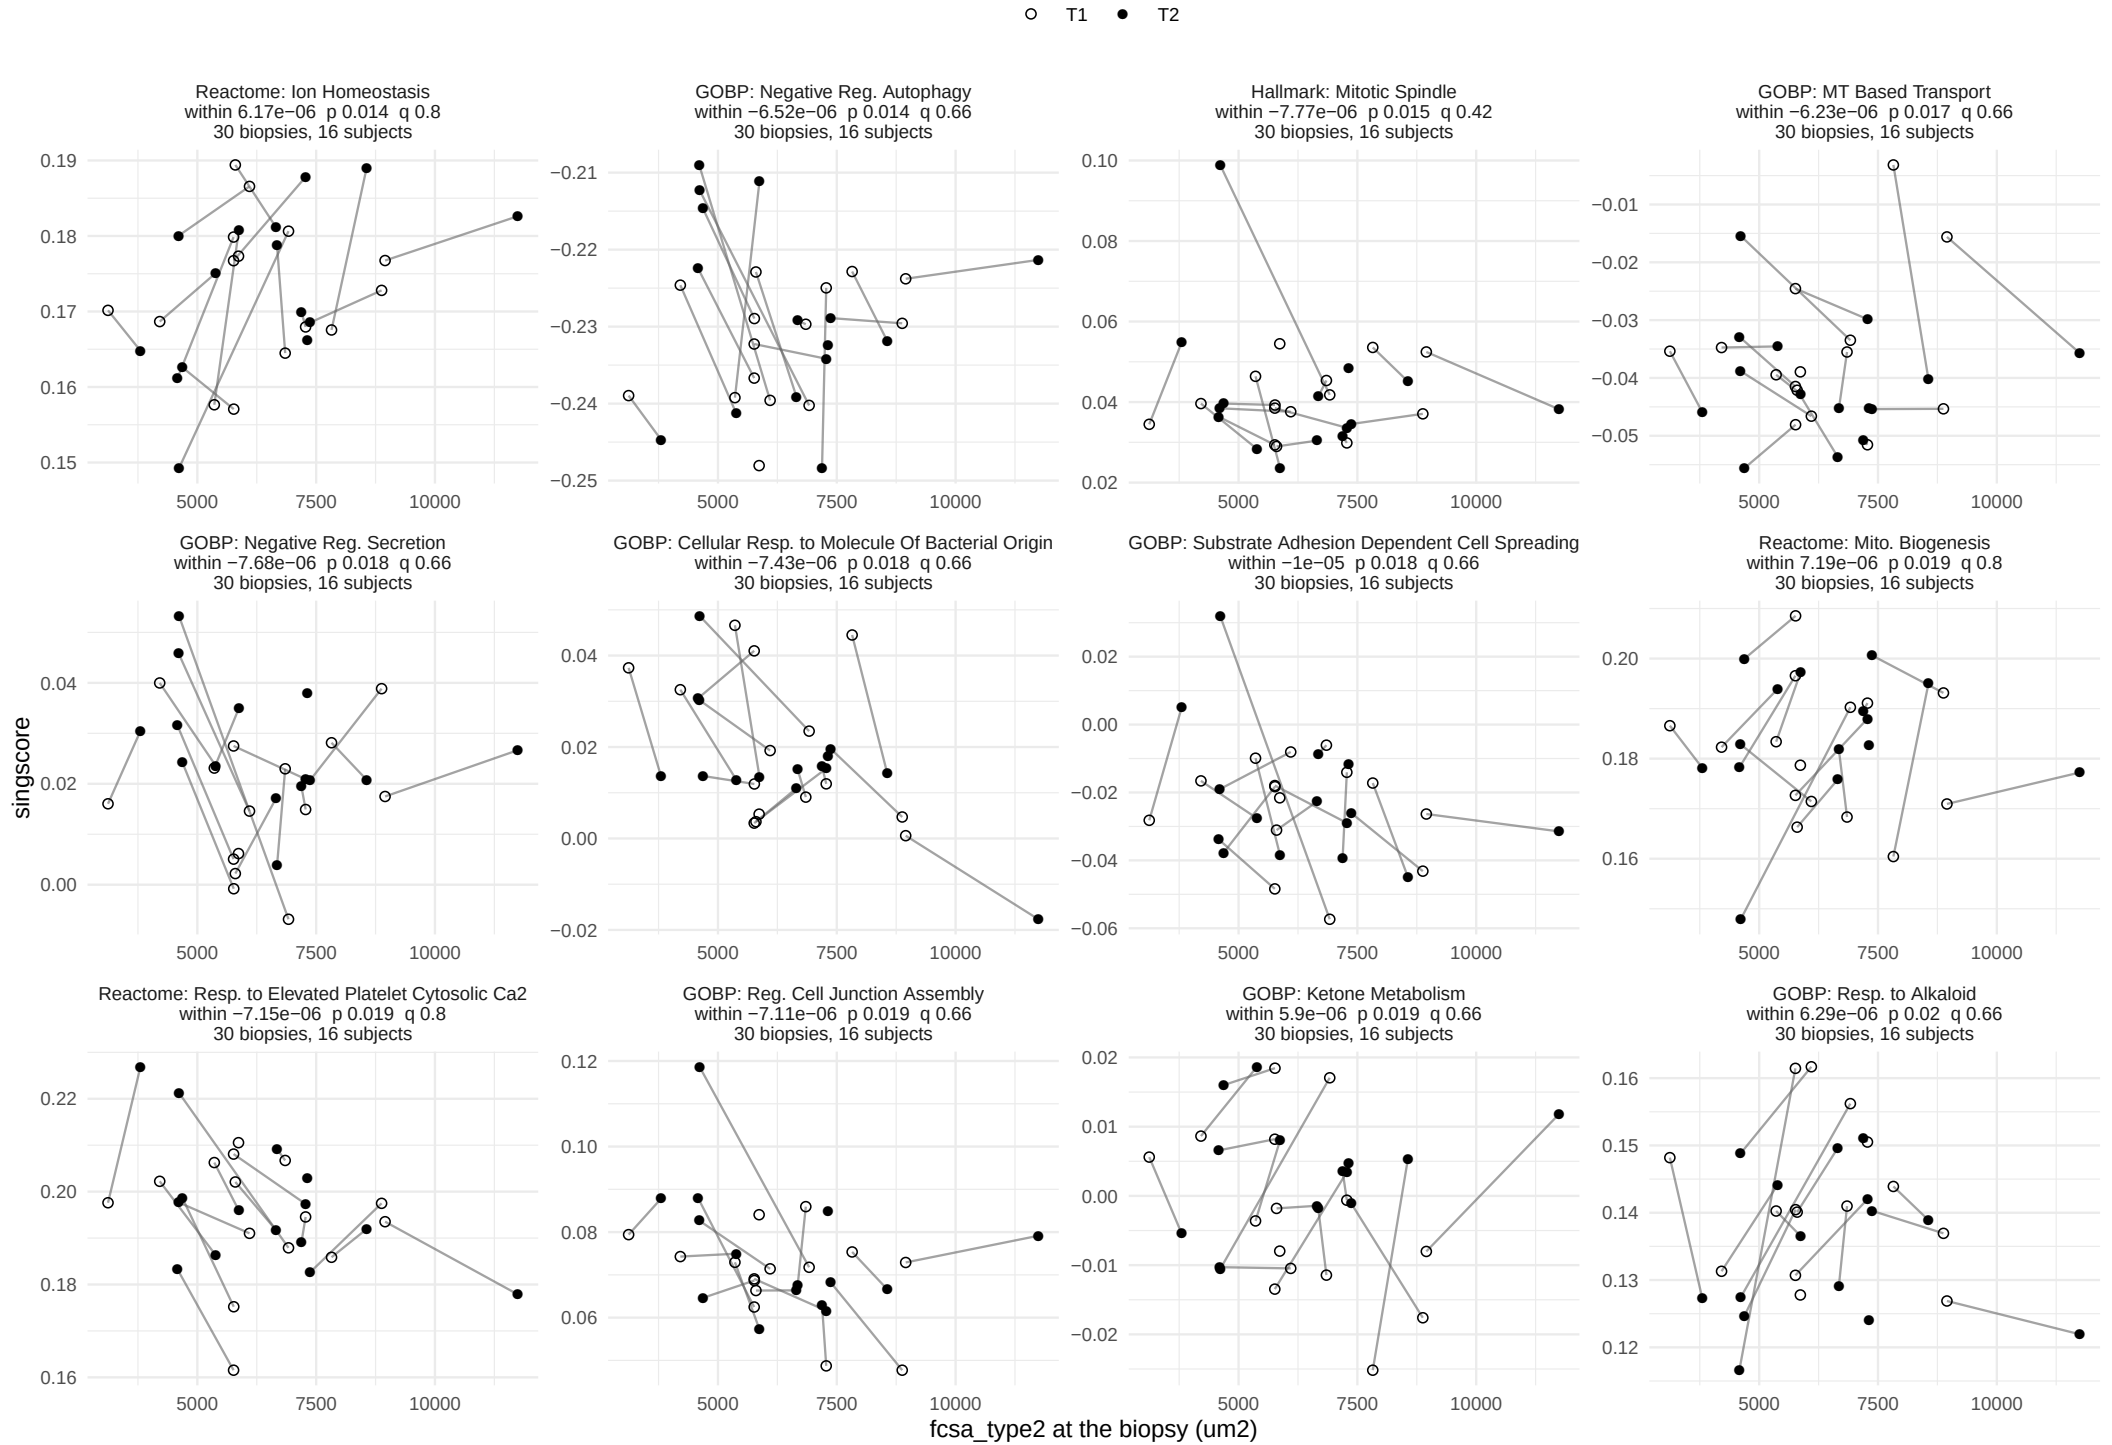

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: slope per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/set_trait_associations.xlsx, model.

fcsa_type2, between−person term


87 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 1 of 2.

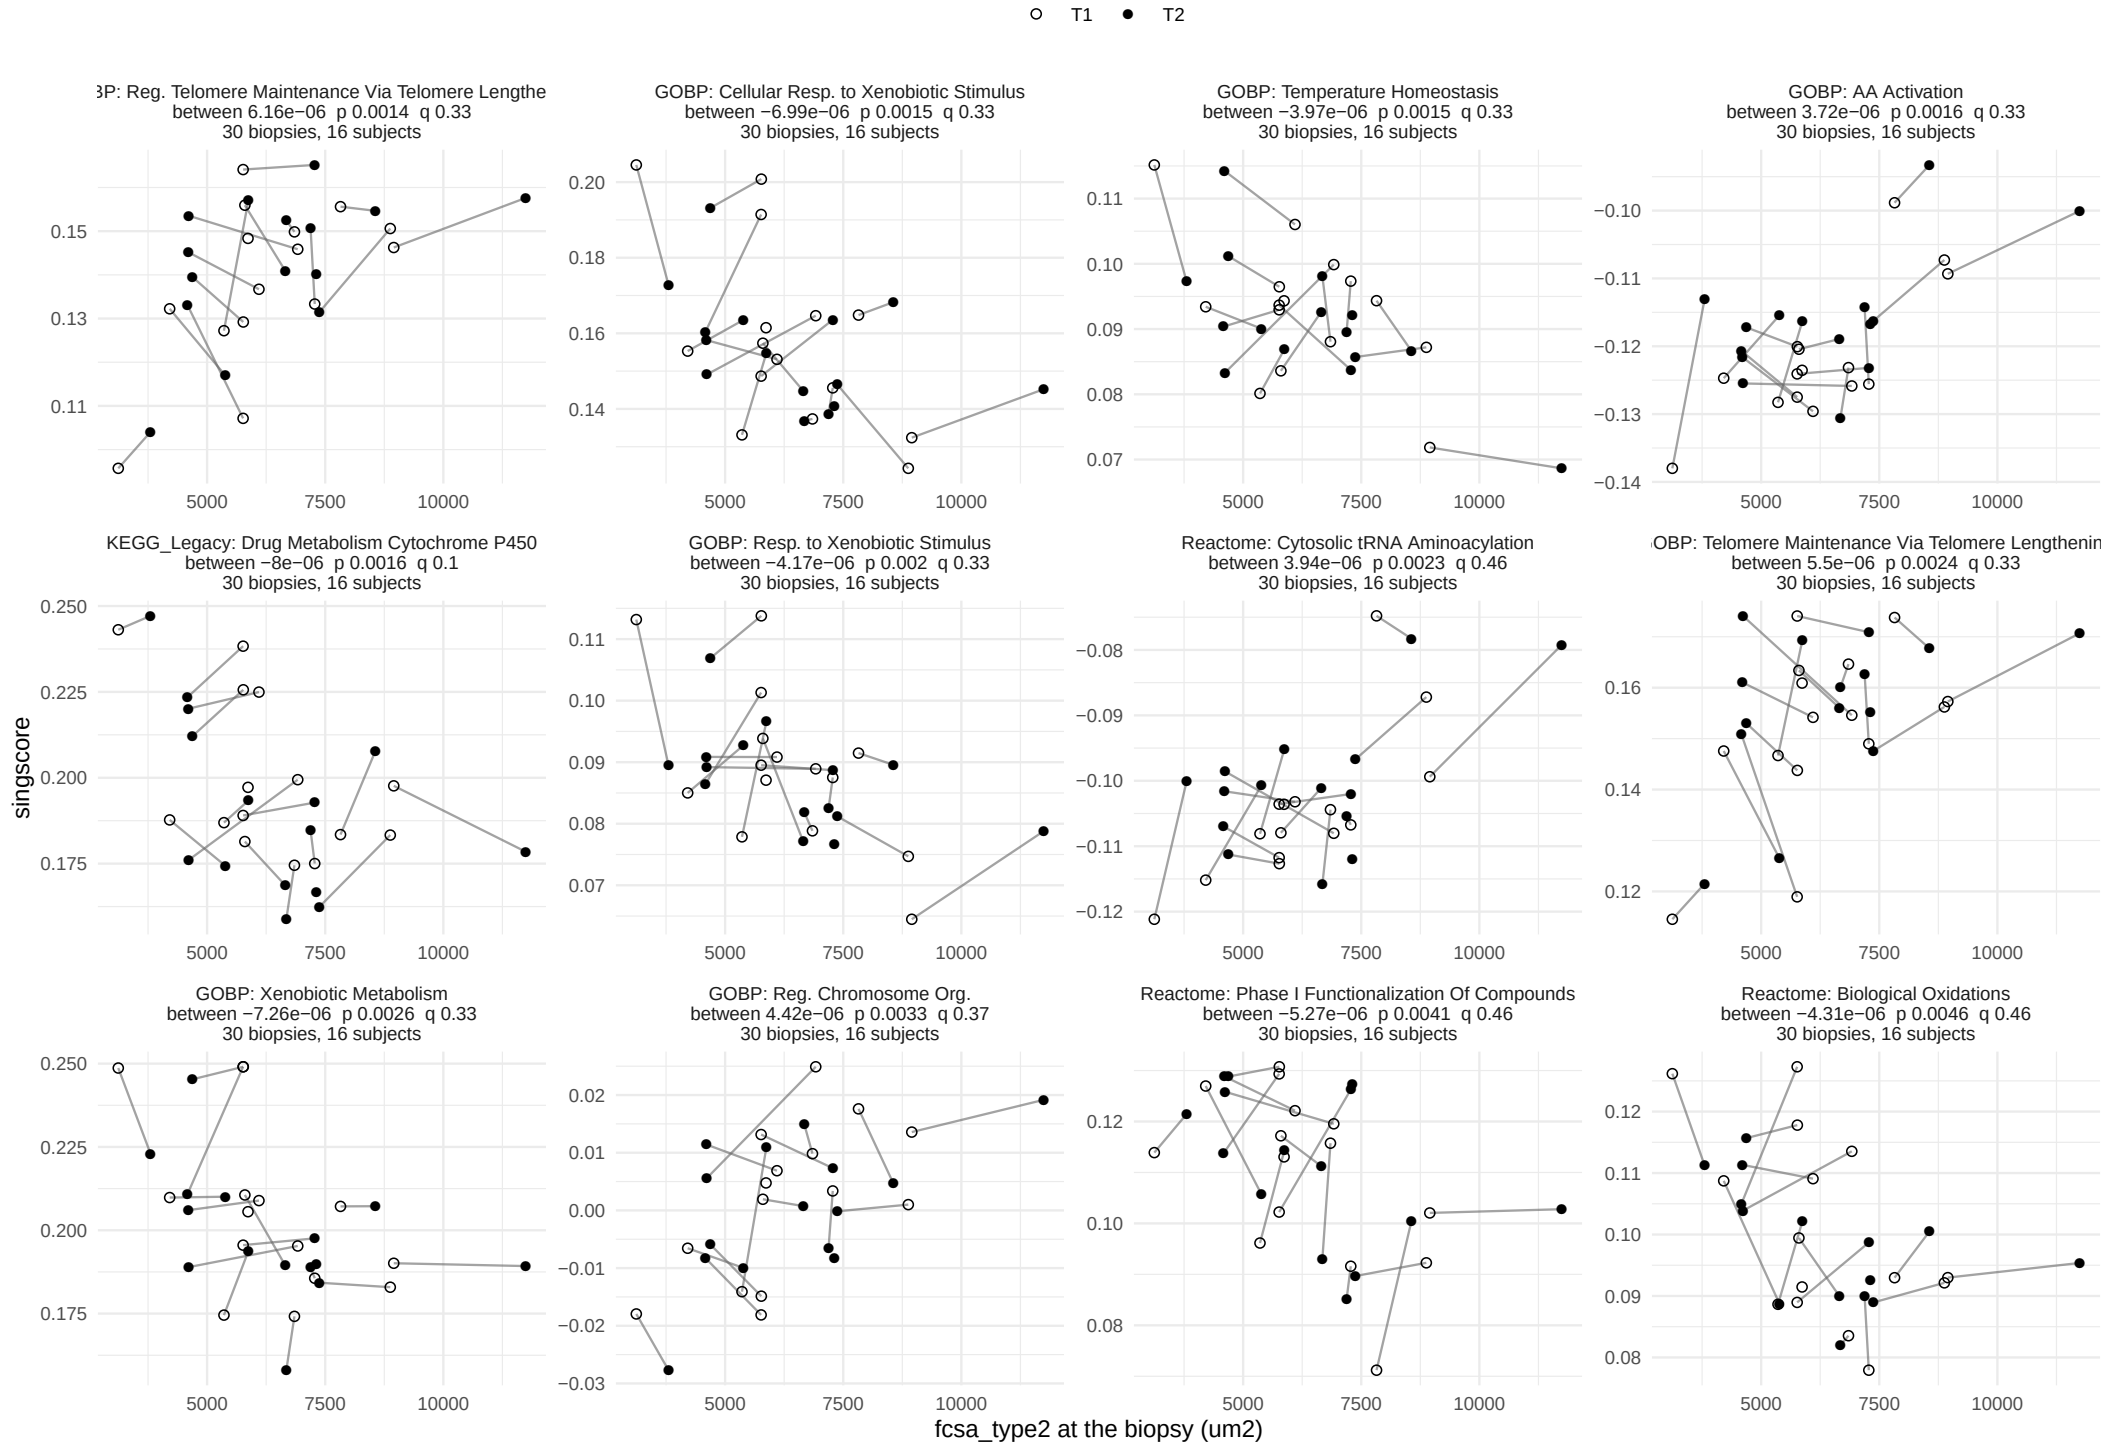

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: slope per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/set_trait_associations.xlsx, model.

fcsa_type2, between−person term


87 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 2 of 2.

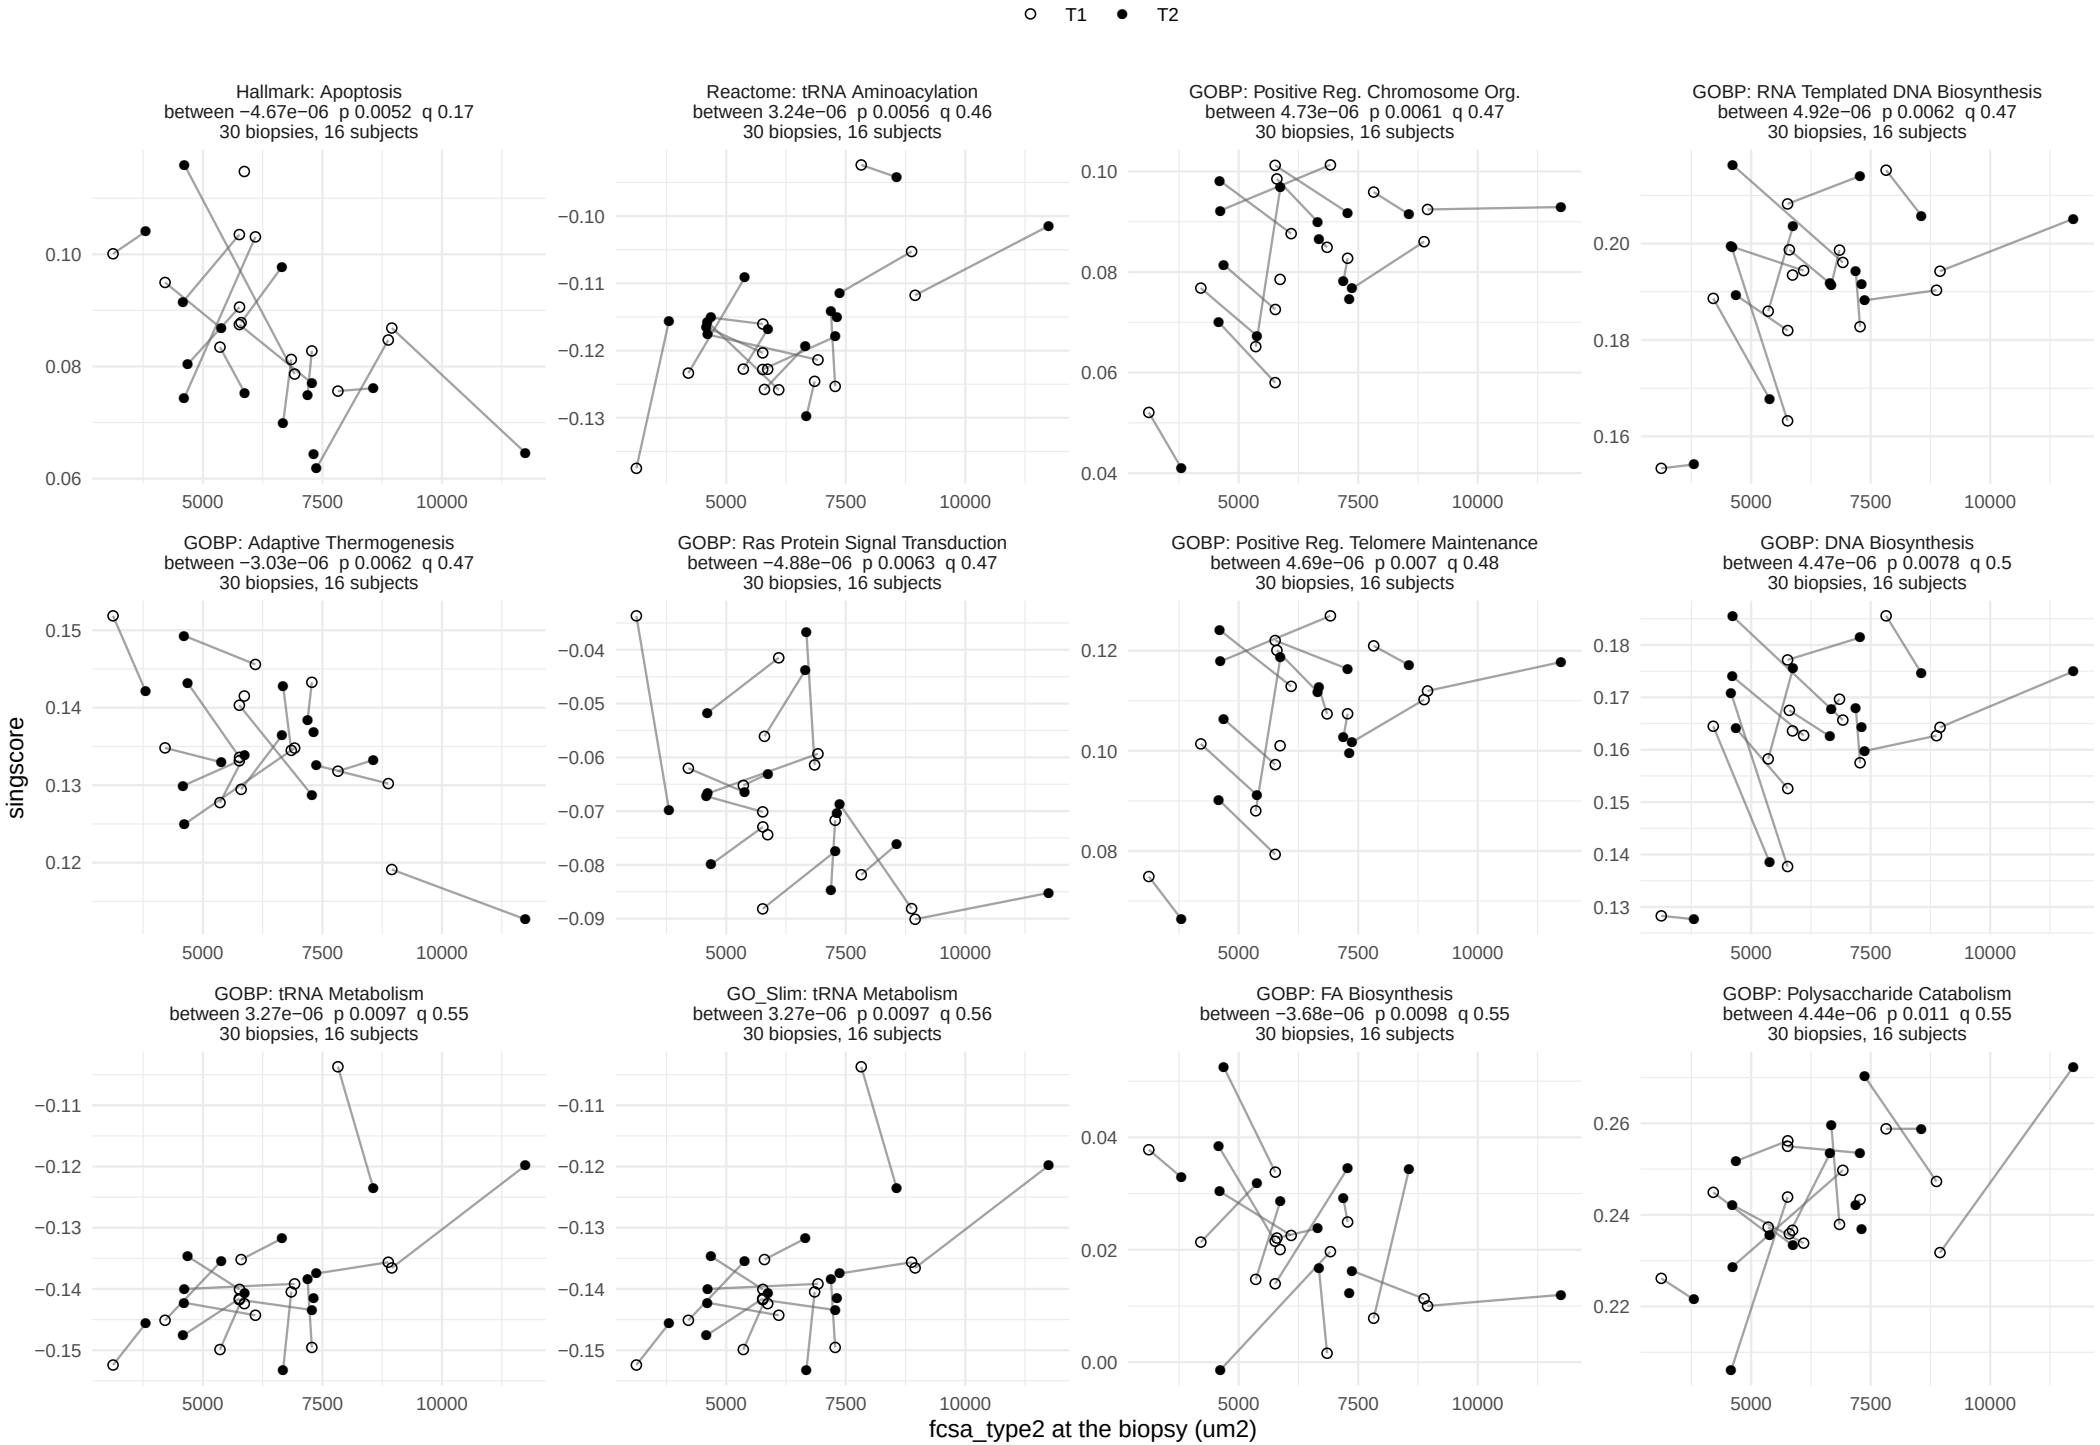

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: slope per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/set_trait_associations.xlsx, model.

mcsa, within−person term


51 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 1 of 2.

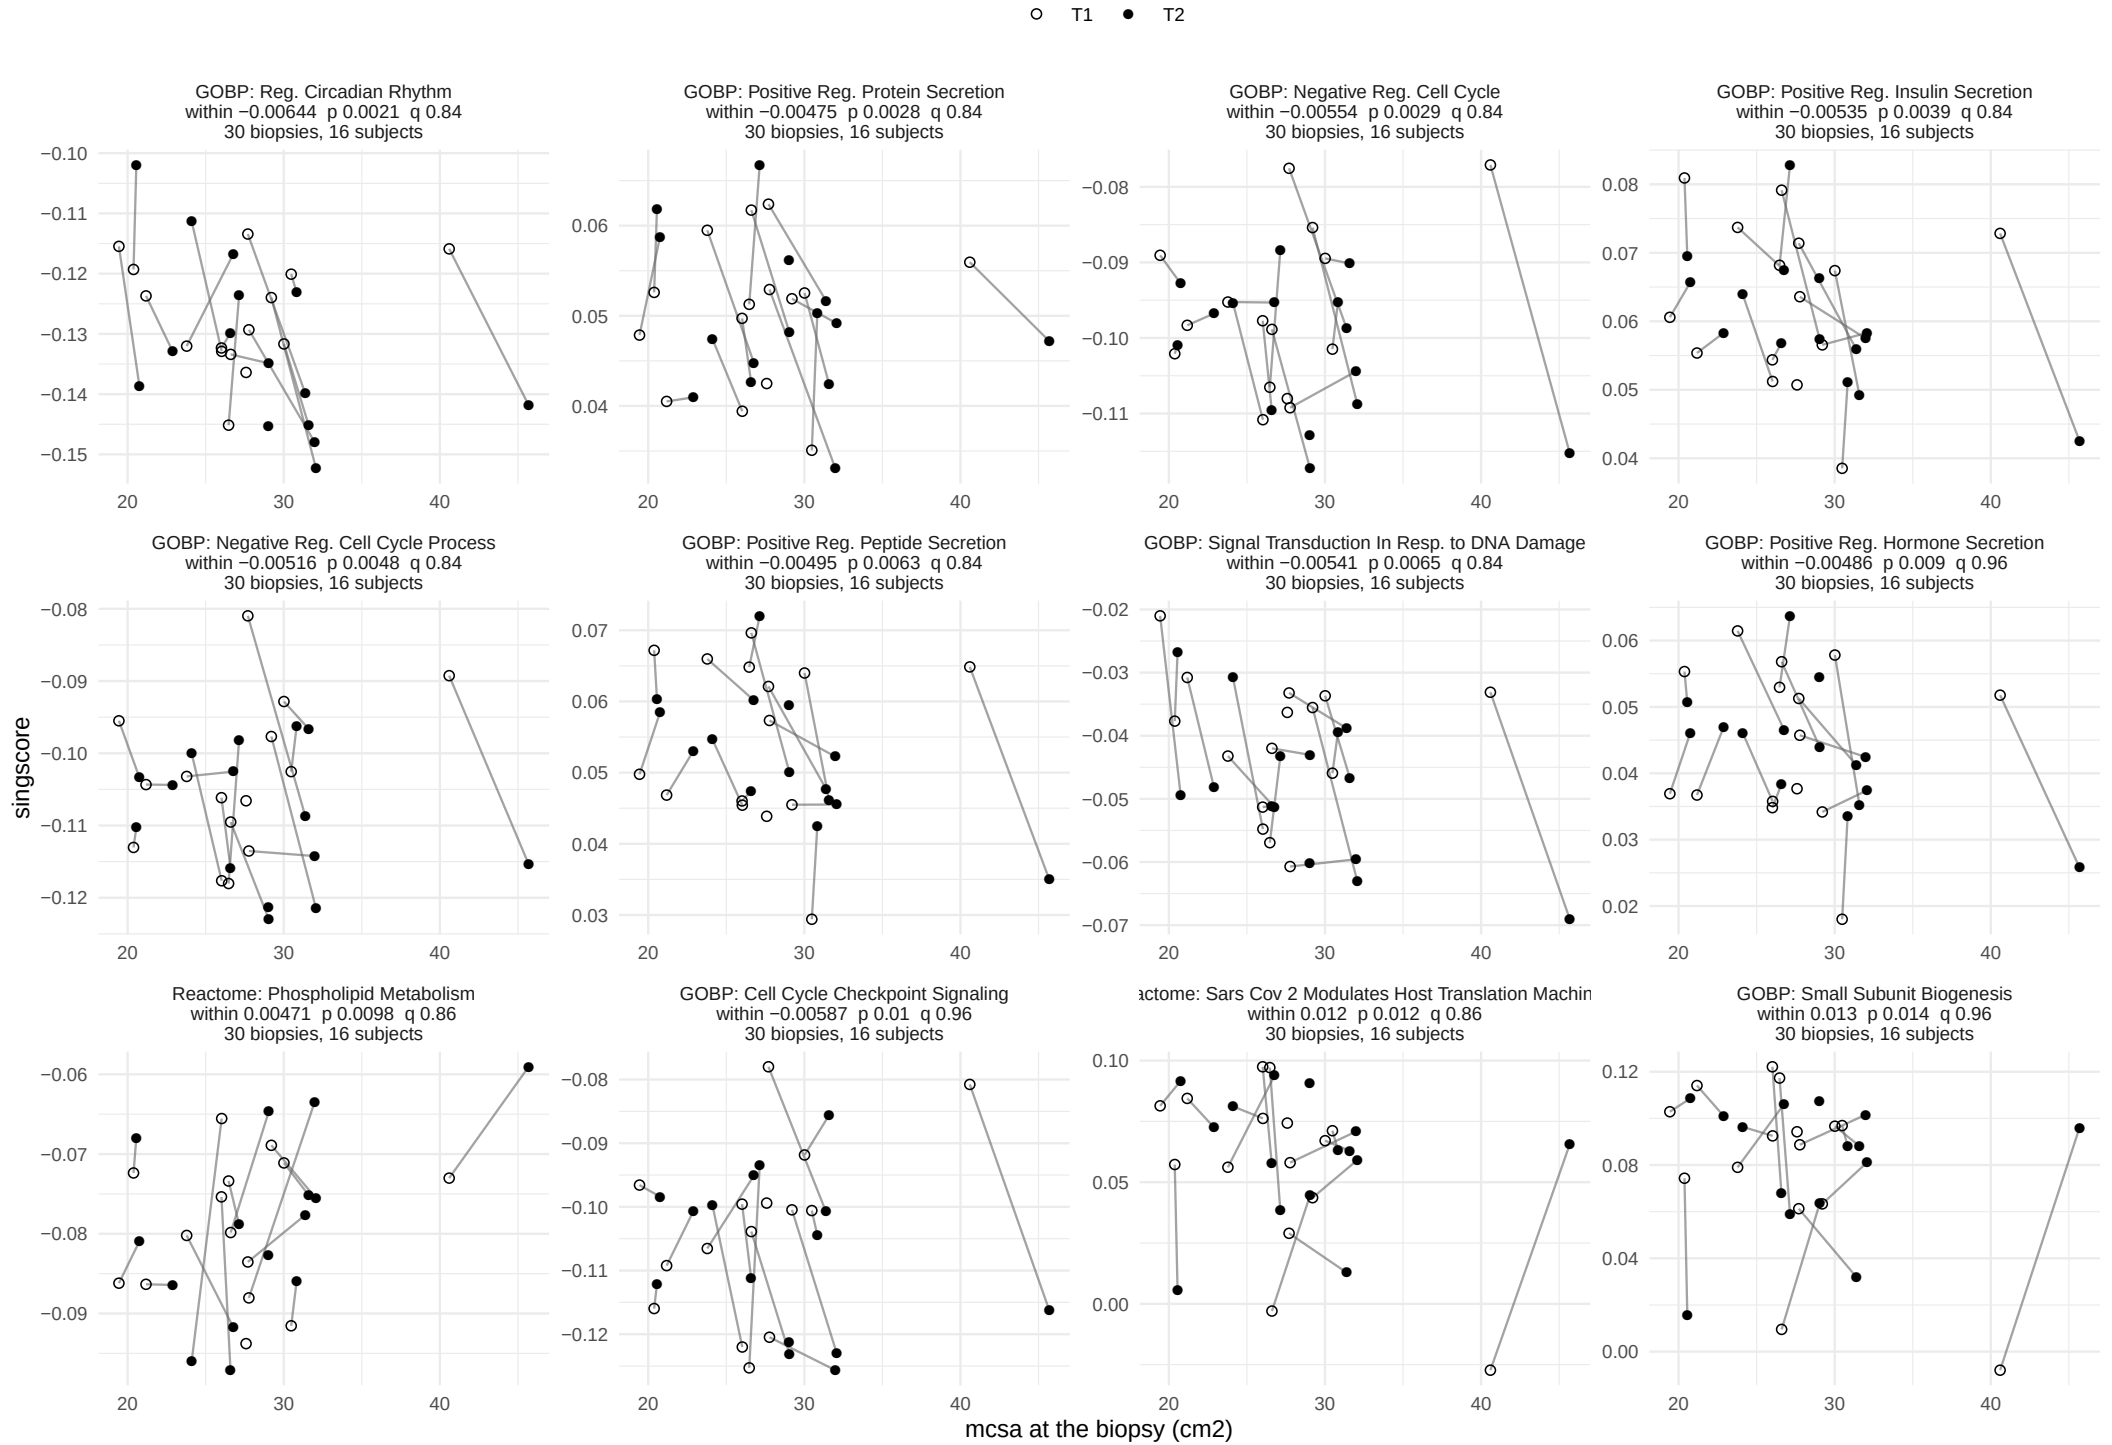

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: slope per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/set_trait_associations.xlsx, model.

mcsa, within−person term


51 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 2 of 2.

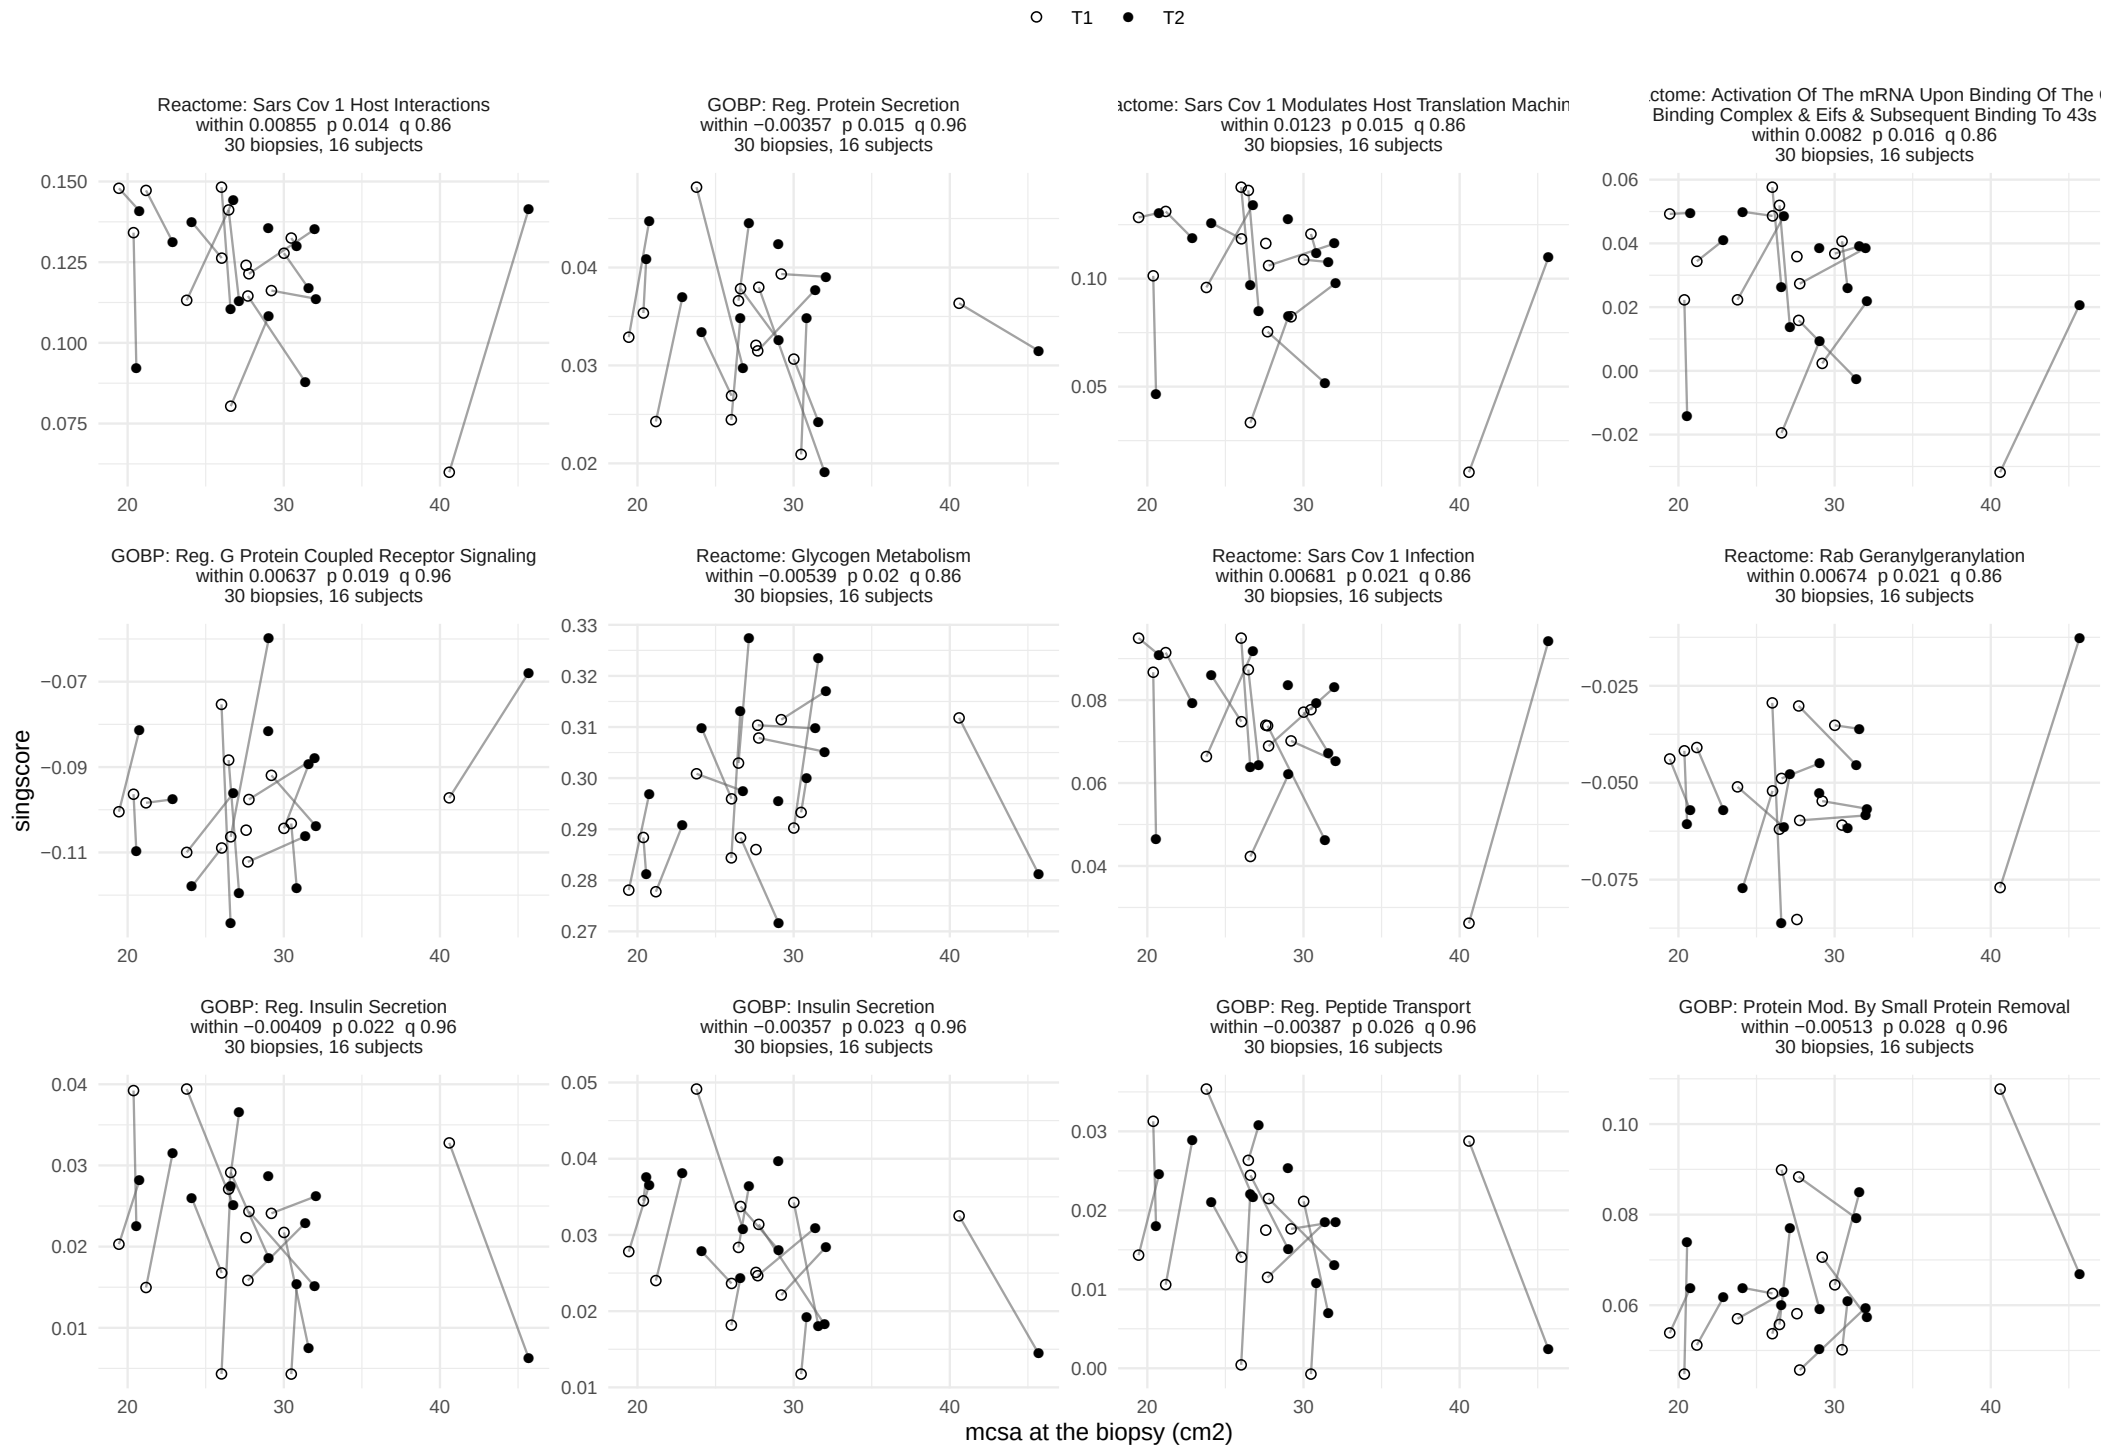

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: slope per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/set_trait_associations.xlsx, model.

mcsa, between−person term


76 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 1 of 2.

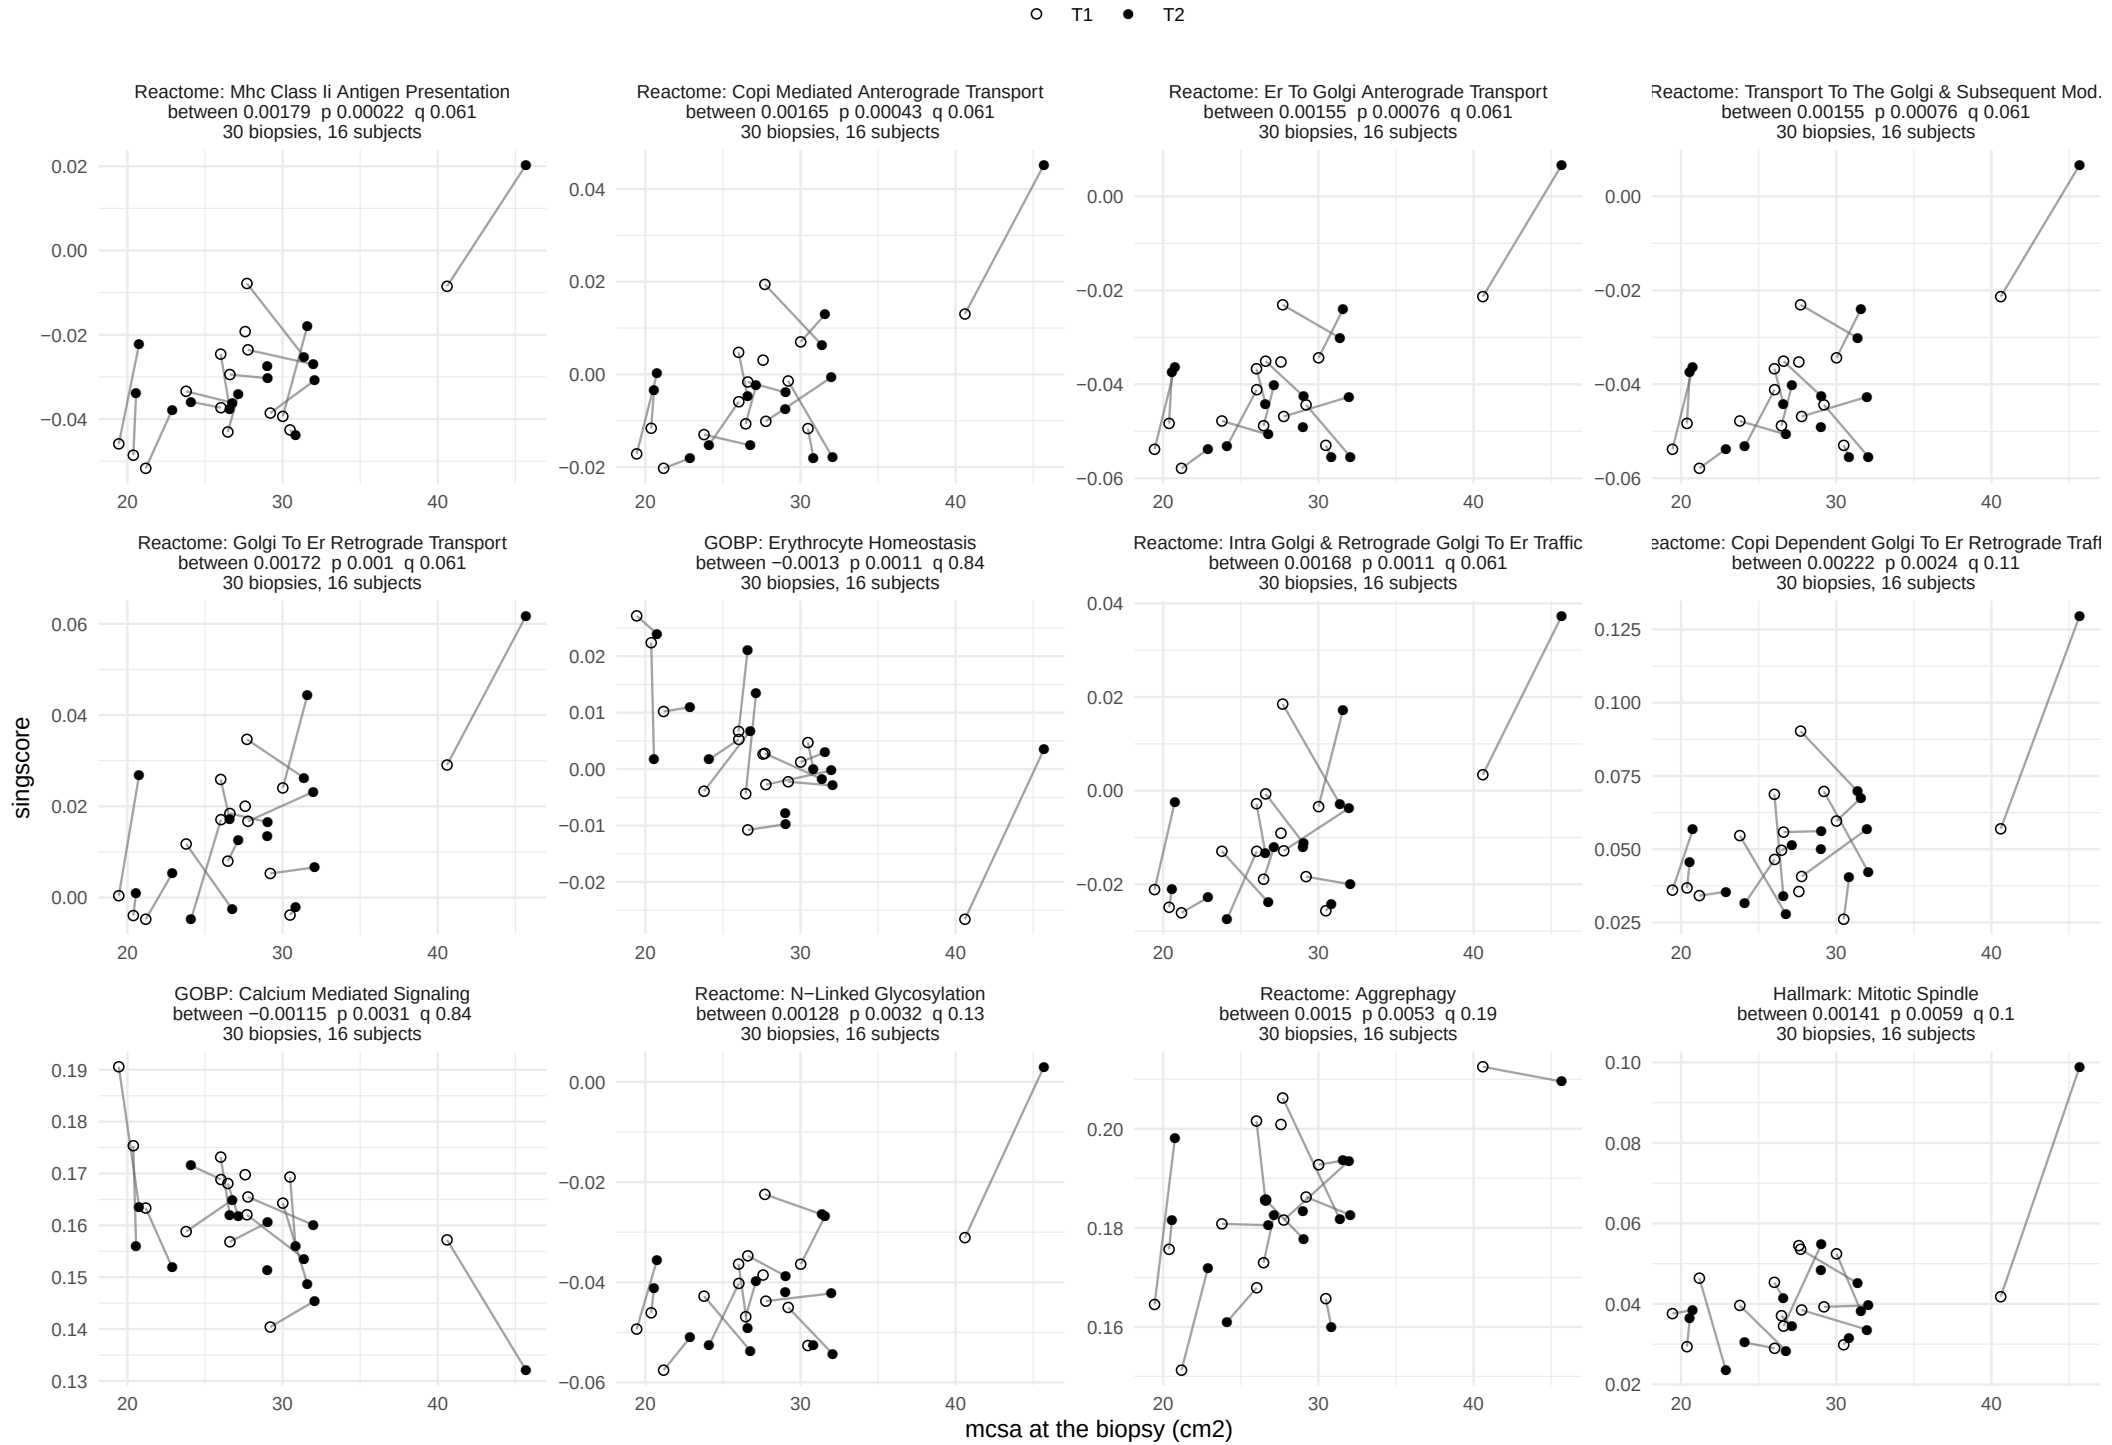

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: slope per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/set_trait_associations.xlsx, model.

mcsa, between−person term


76 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 2 of 2.

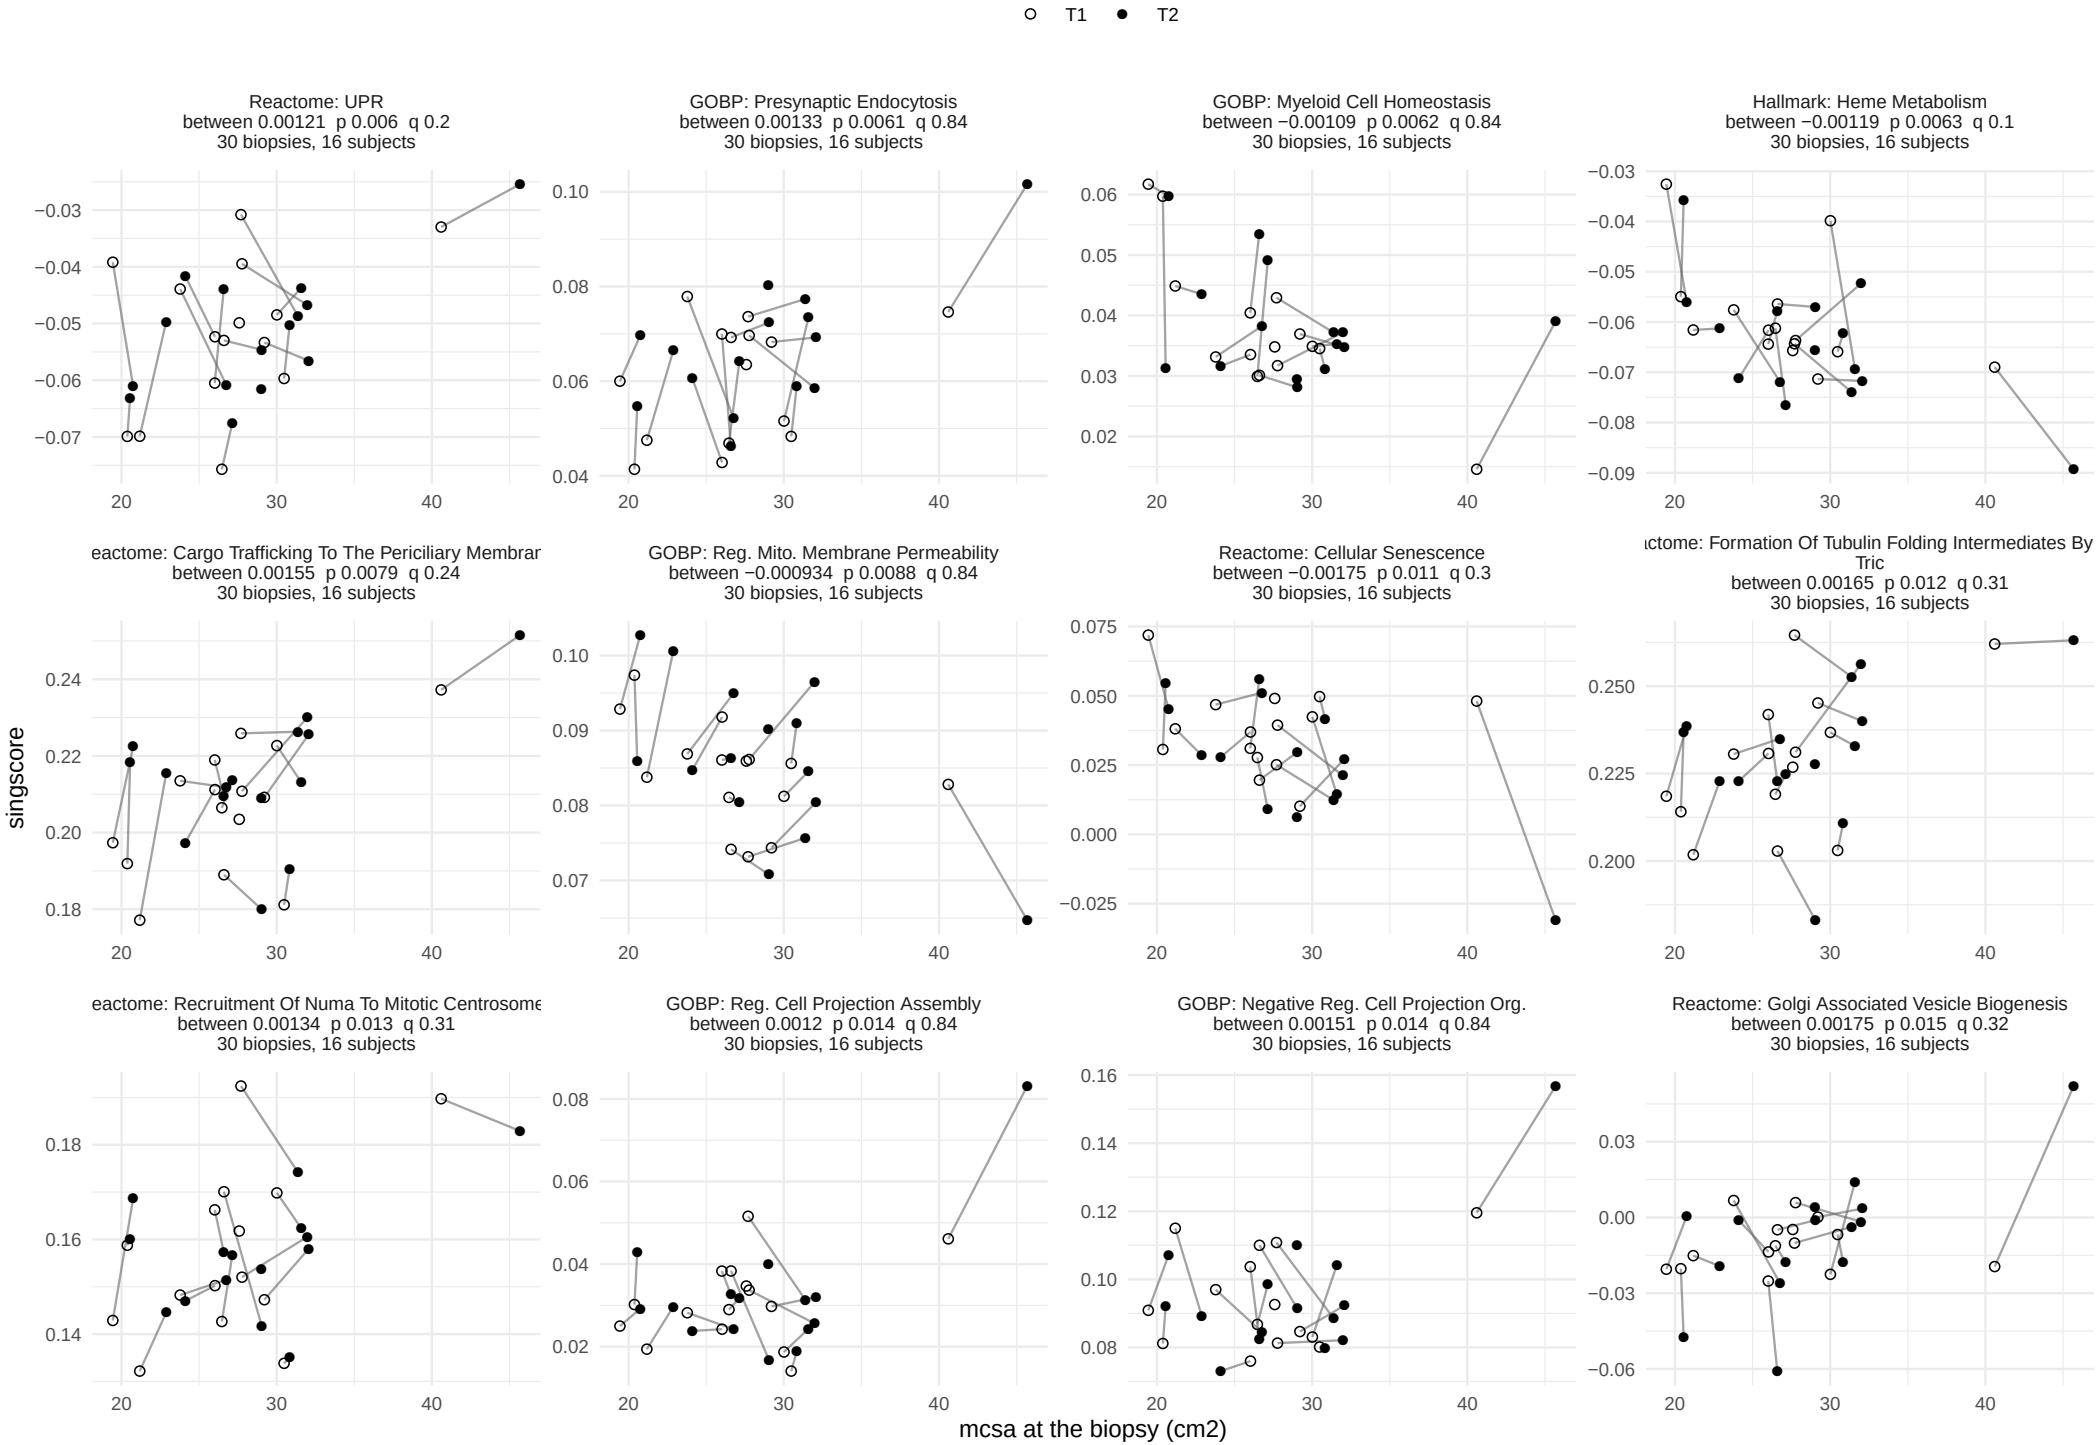

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: slope per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/set_trait_associations.xlsx, model.

leg_press_1rm, within−person term


49 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 1 of 2.

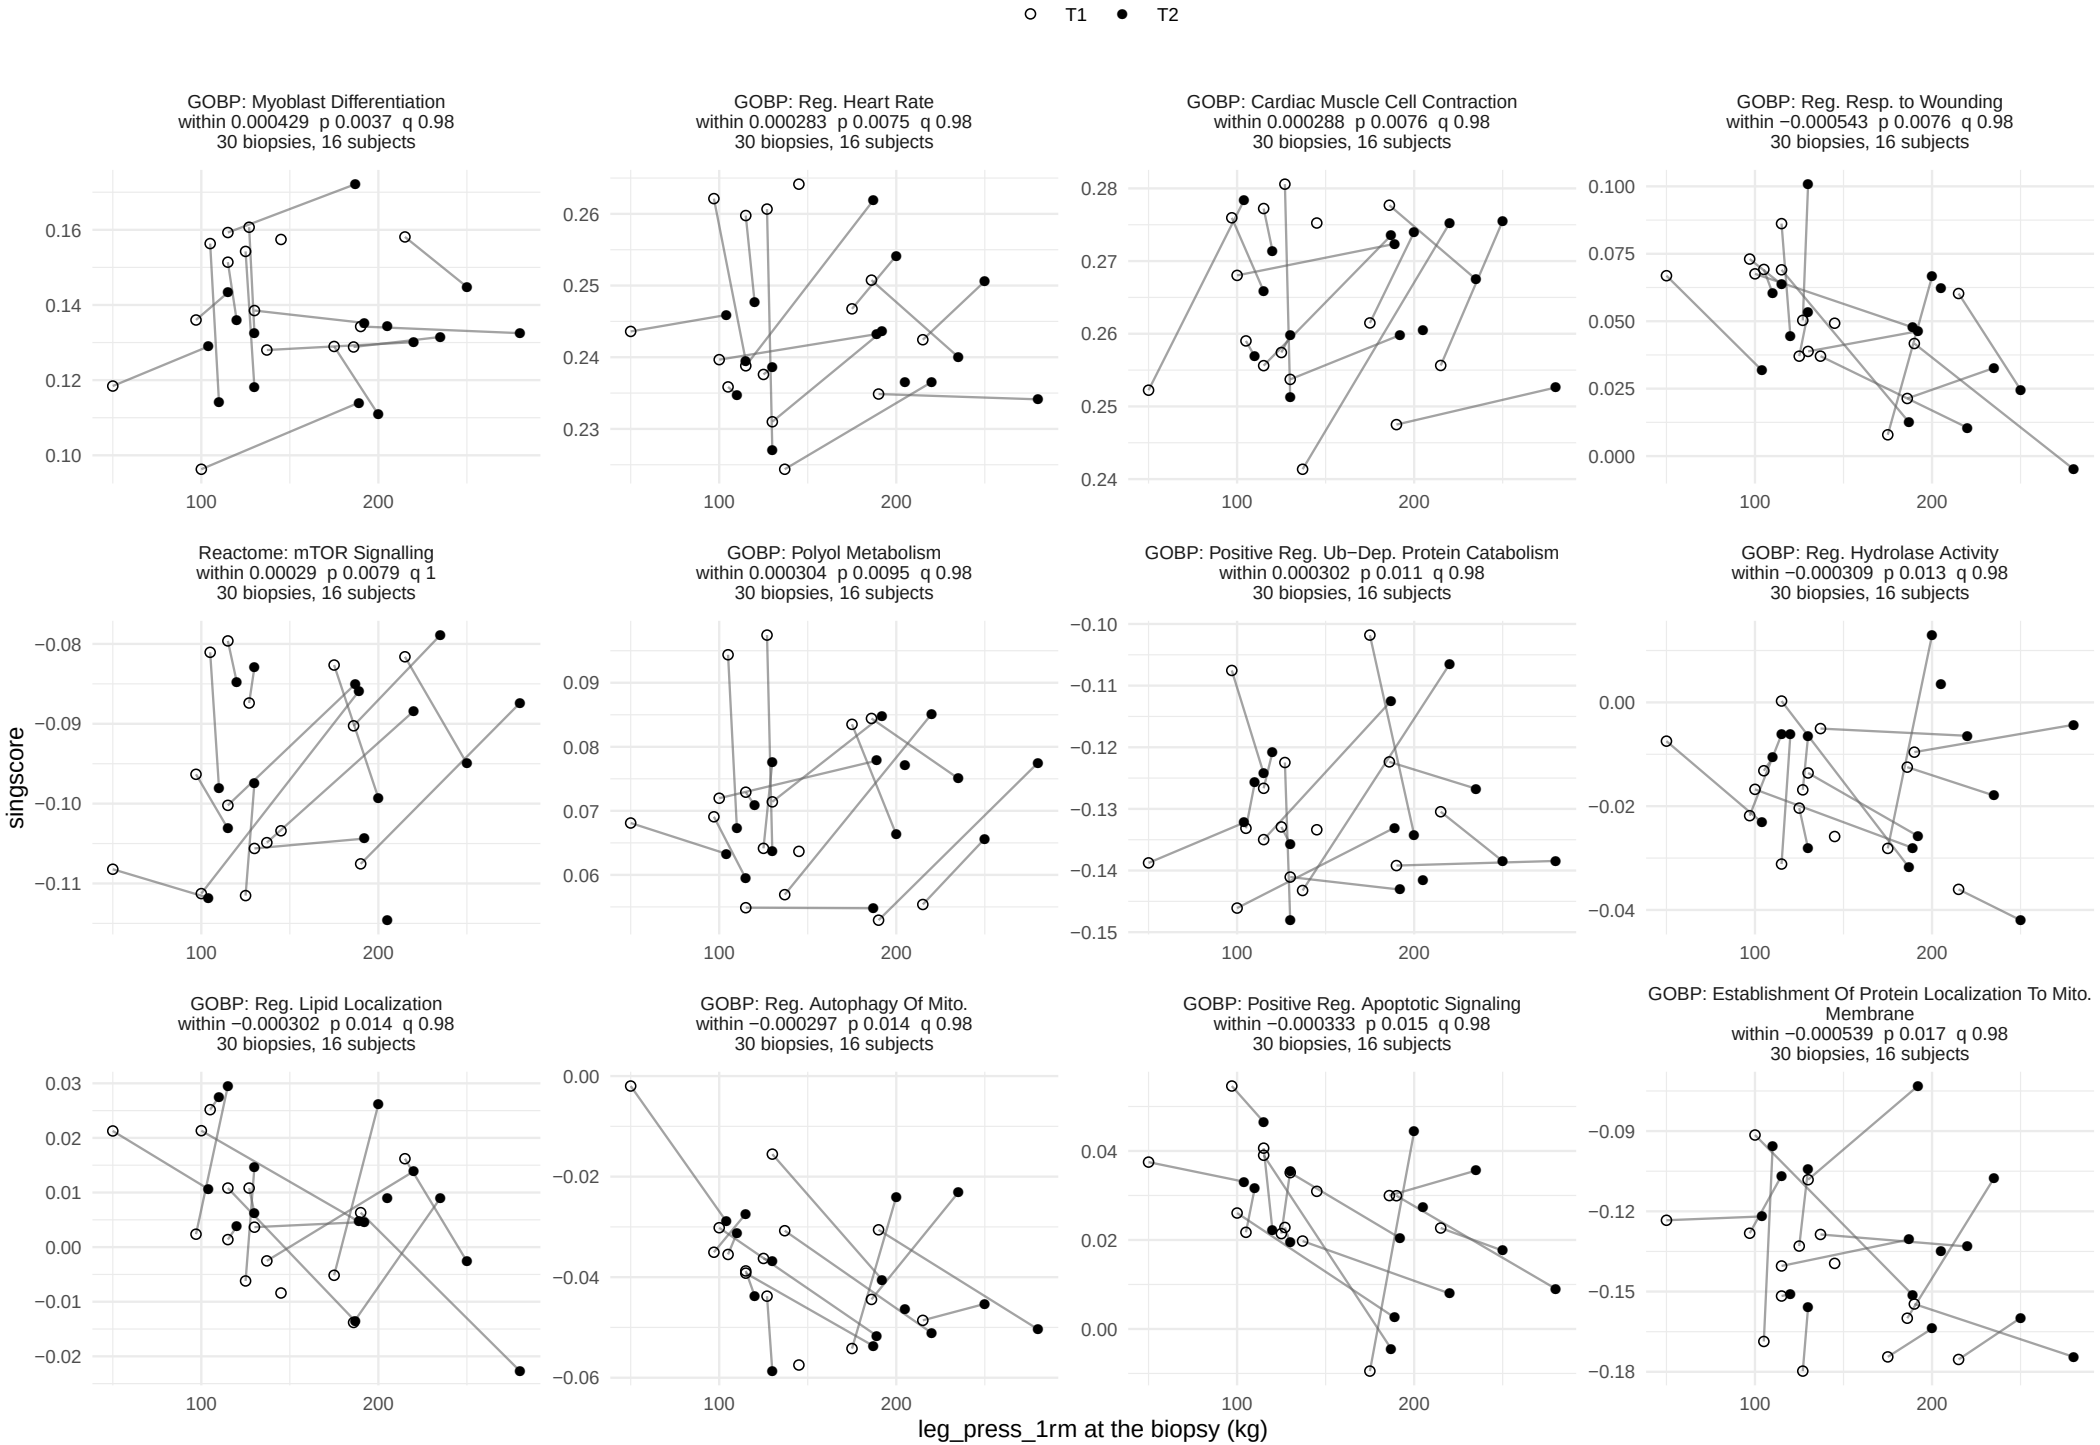

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: slope per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/set_trait_associations.xlsx, model.

leg_press_1rm, within−person term


49 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 2 of 2.

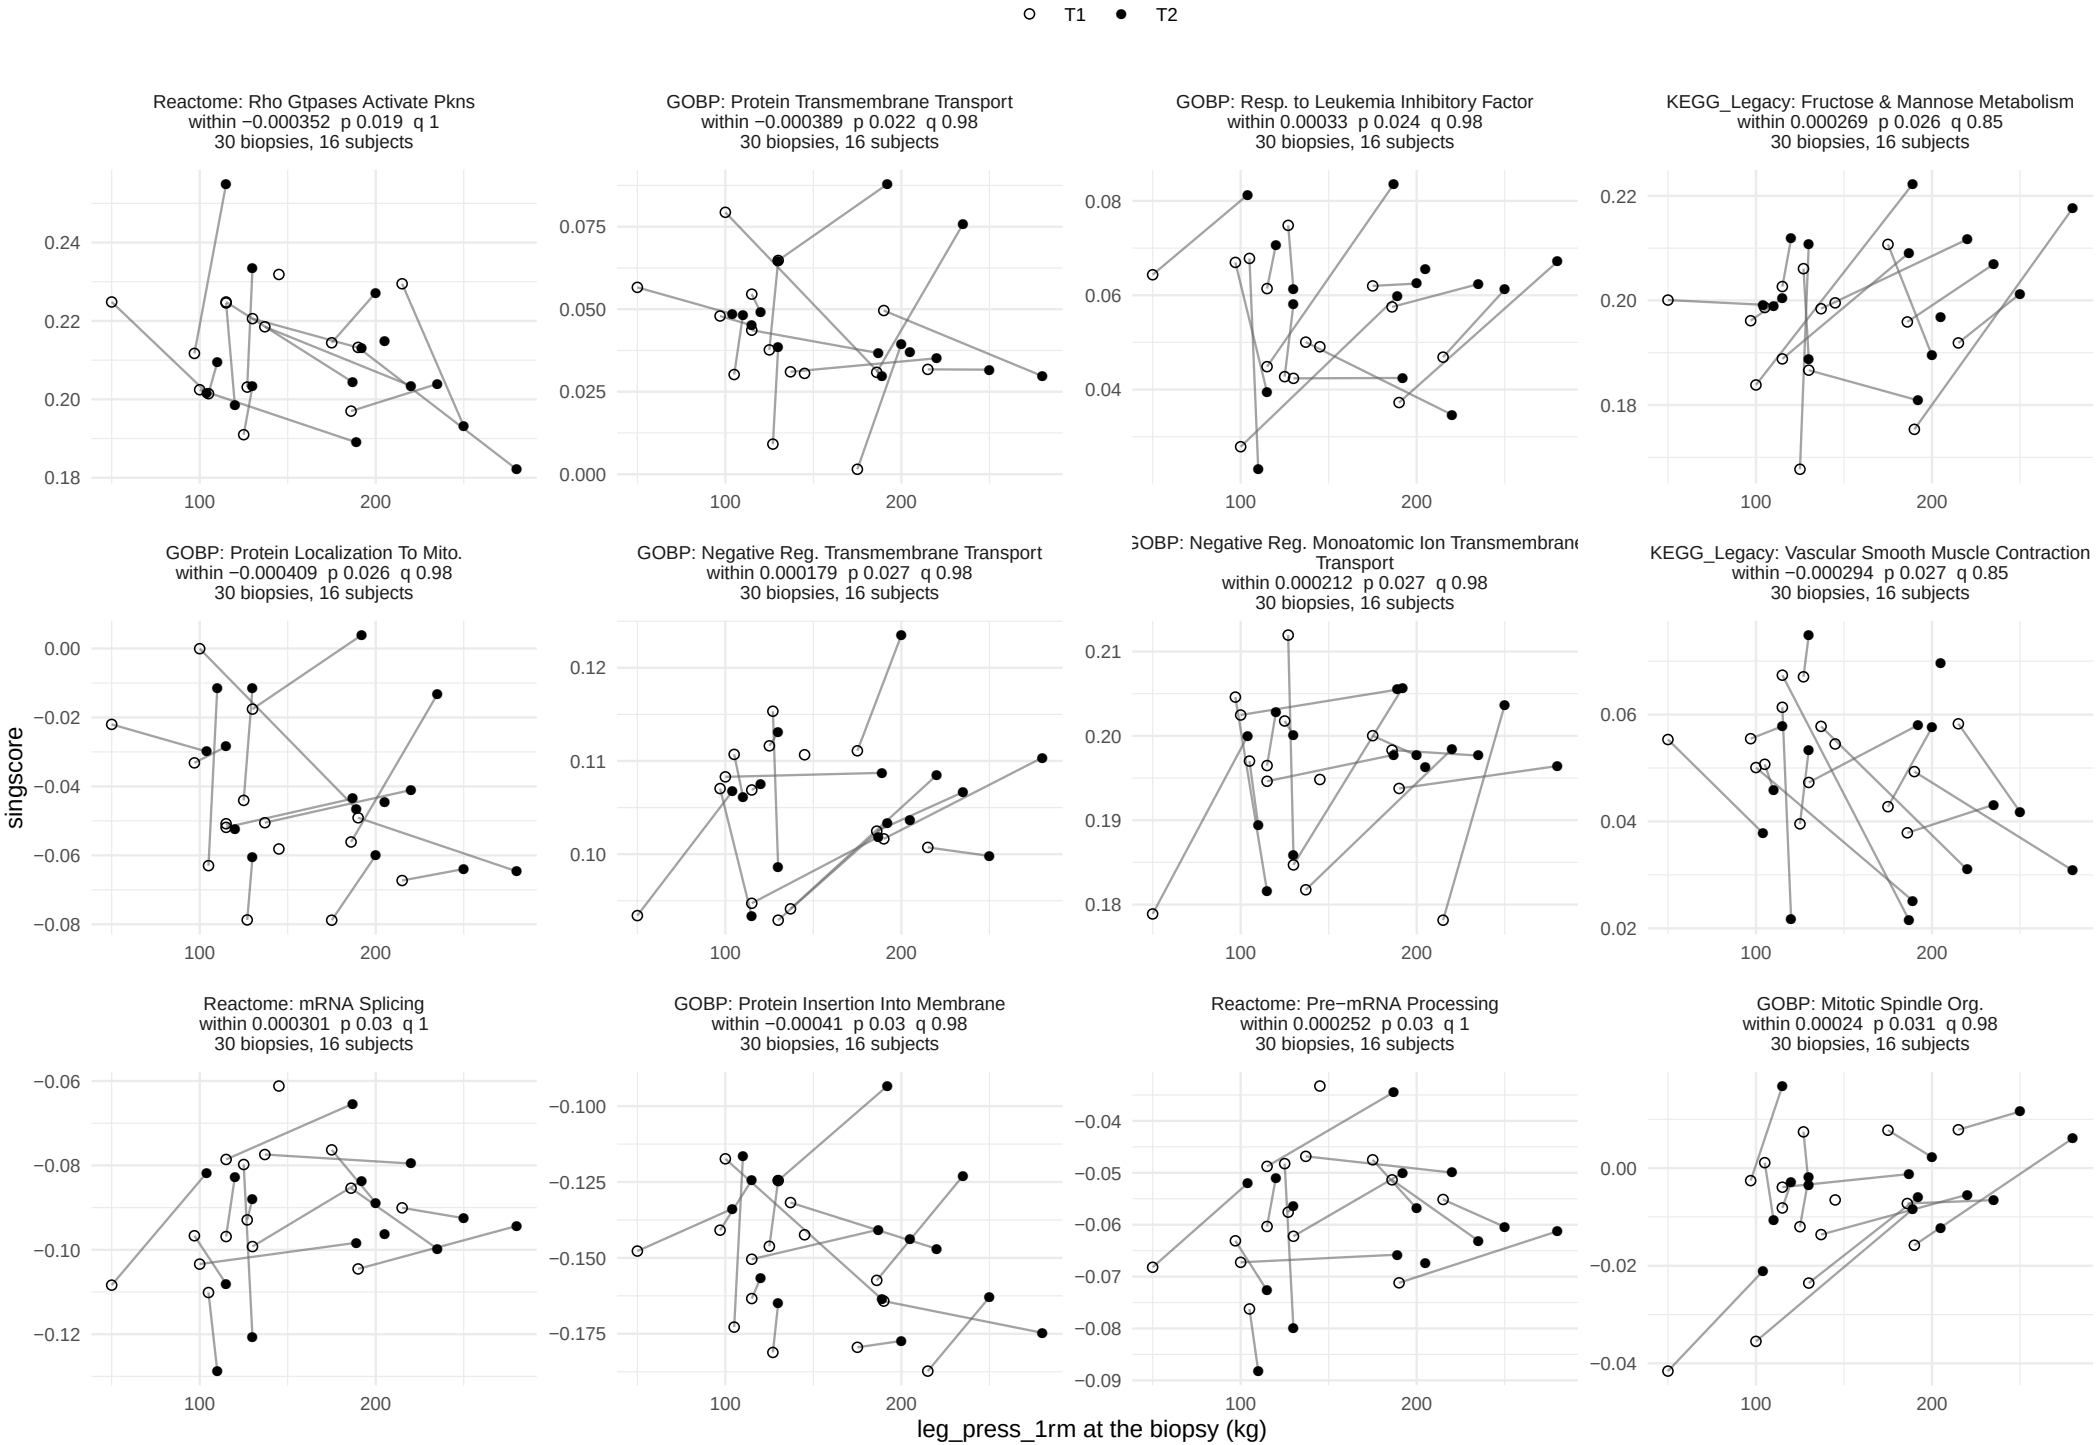

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: slope per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/set_trait_associations.xlsx, model.

leg_press_1rm, between−person term


64 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 1 of 2.

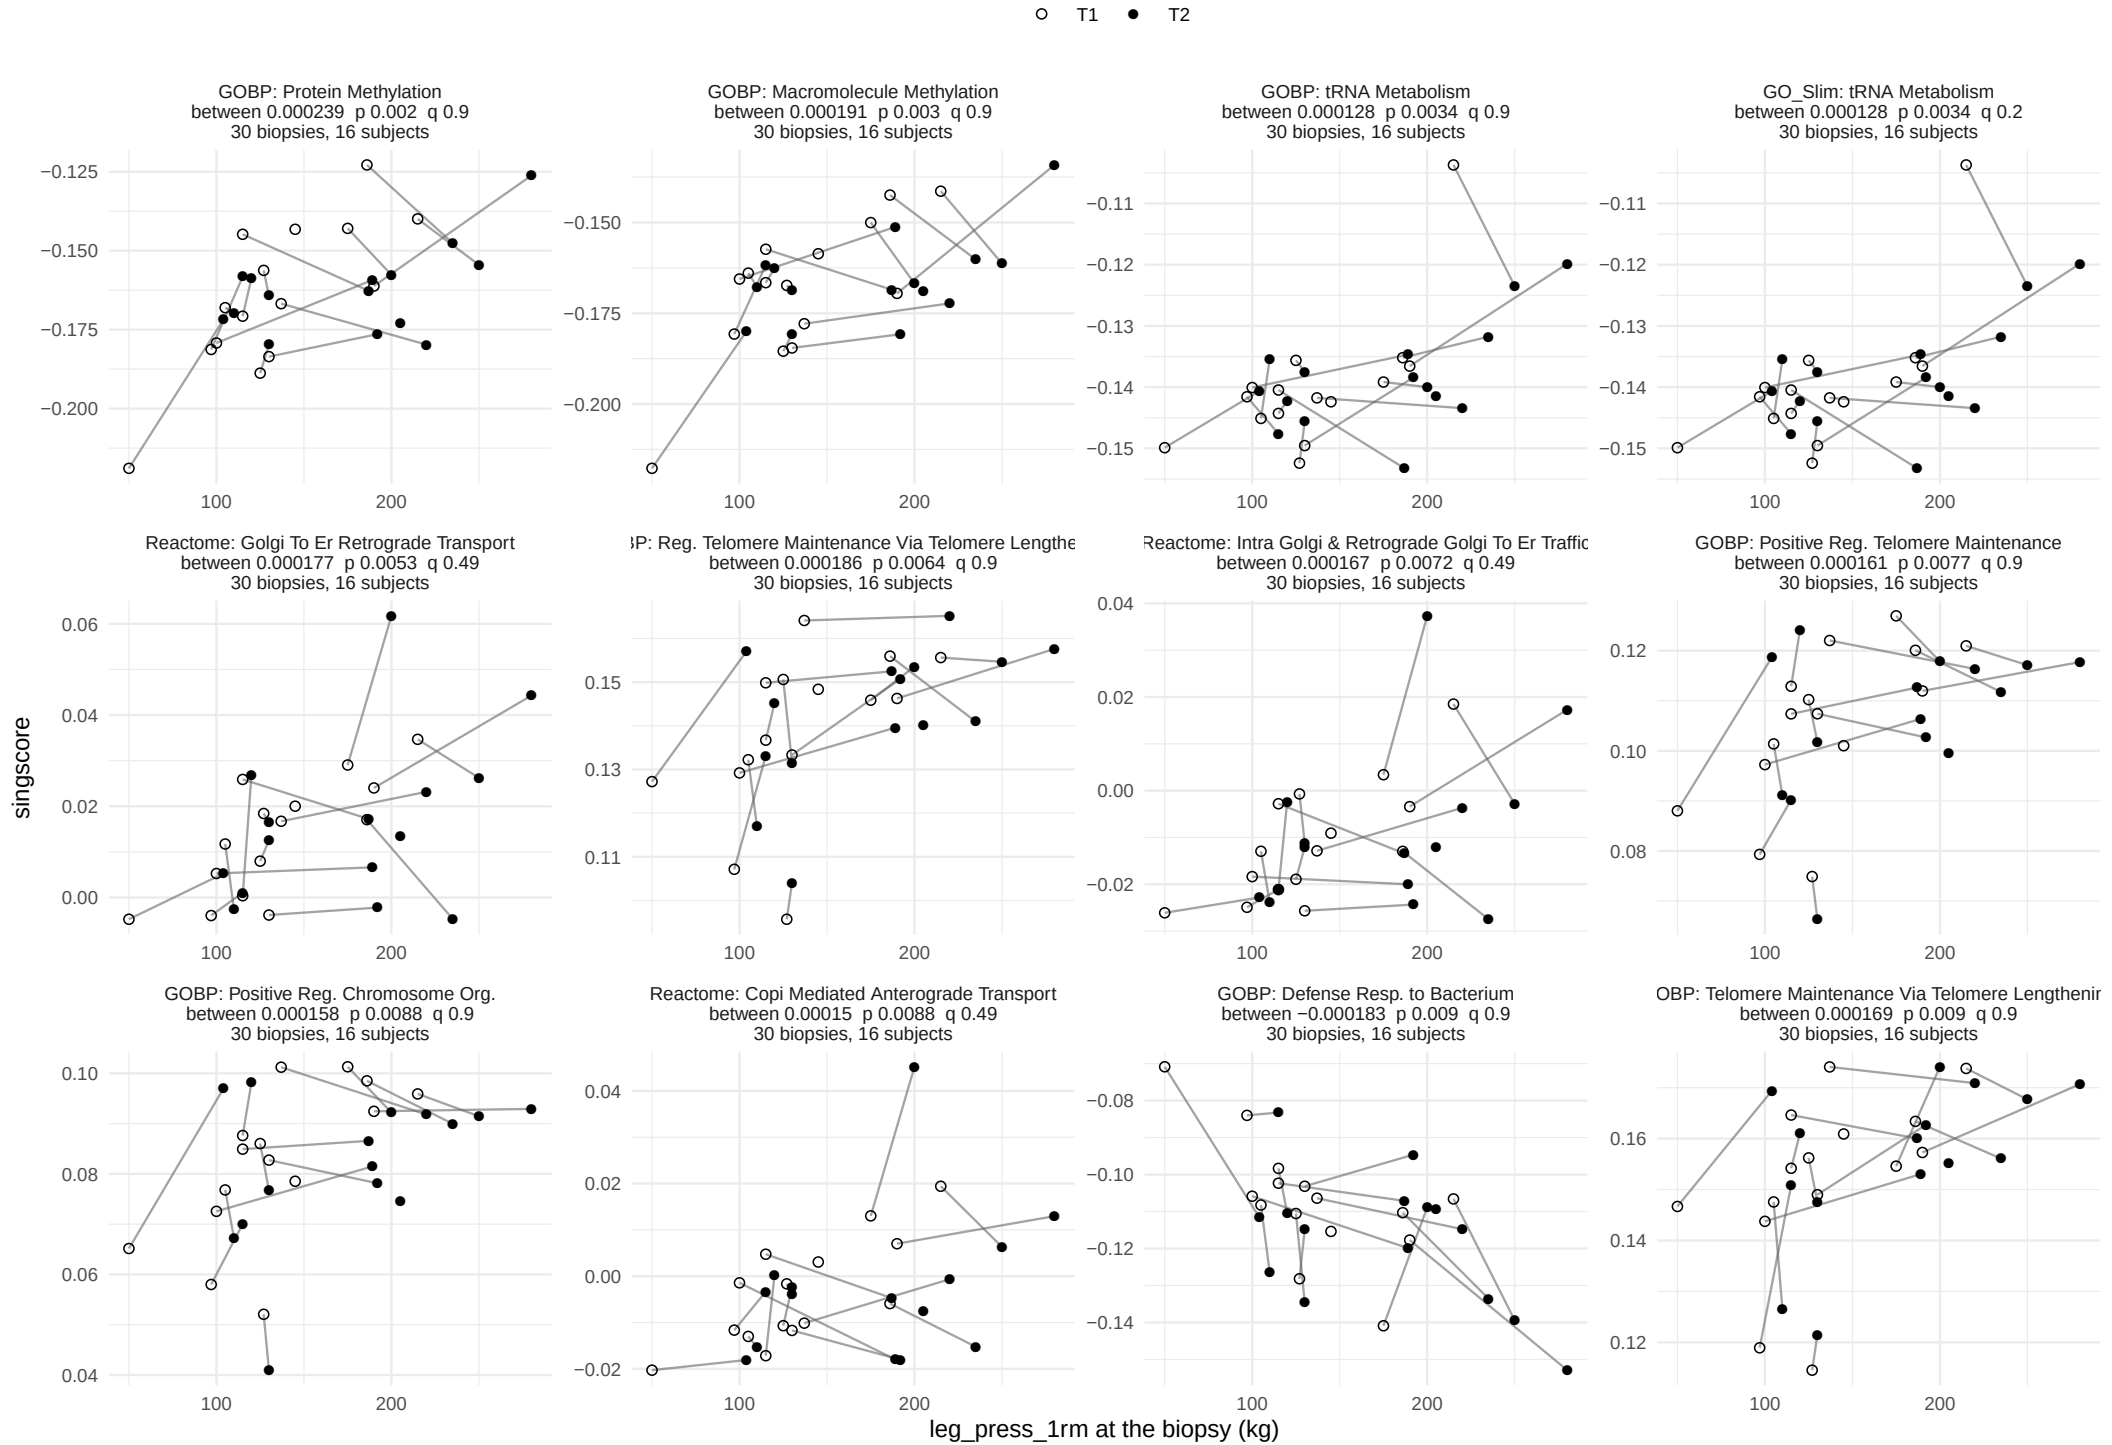

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: slope per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/set_trait_associations.xlsx, model.

leg_press_1rm, between−person term


64 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 2 of 2.

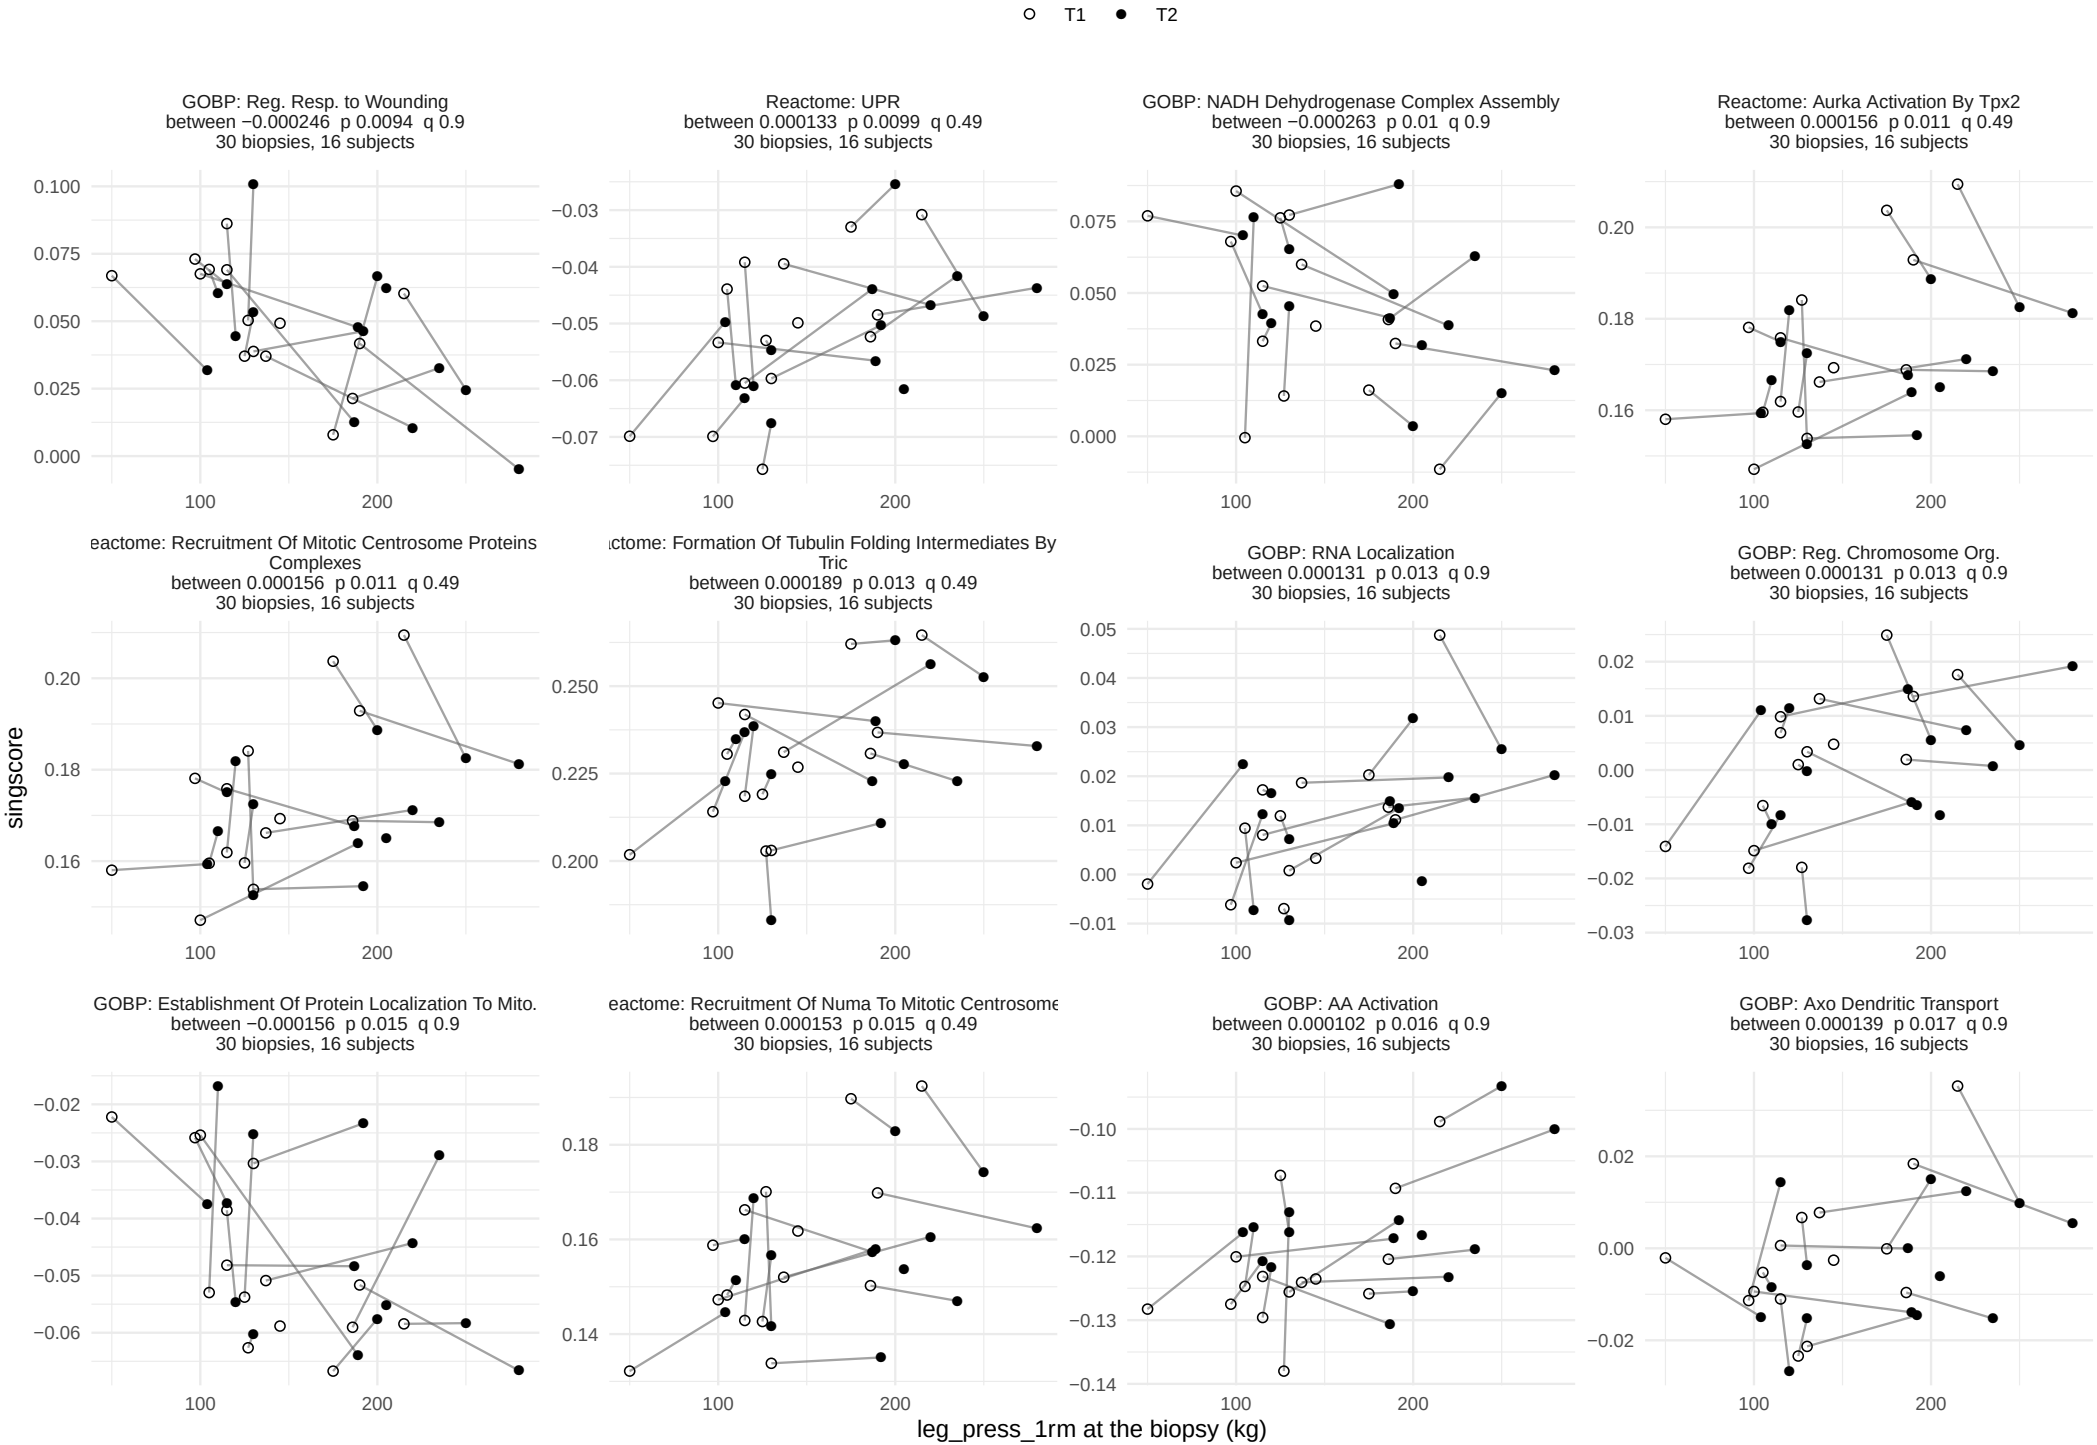

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: slope per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/set_trait_associations.xlsx, model.

leg_ext_1rm, within−person term


82 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 1 of 2.

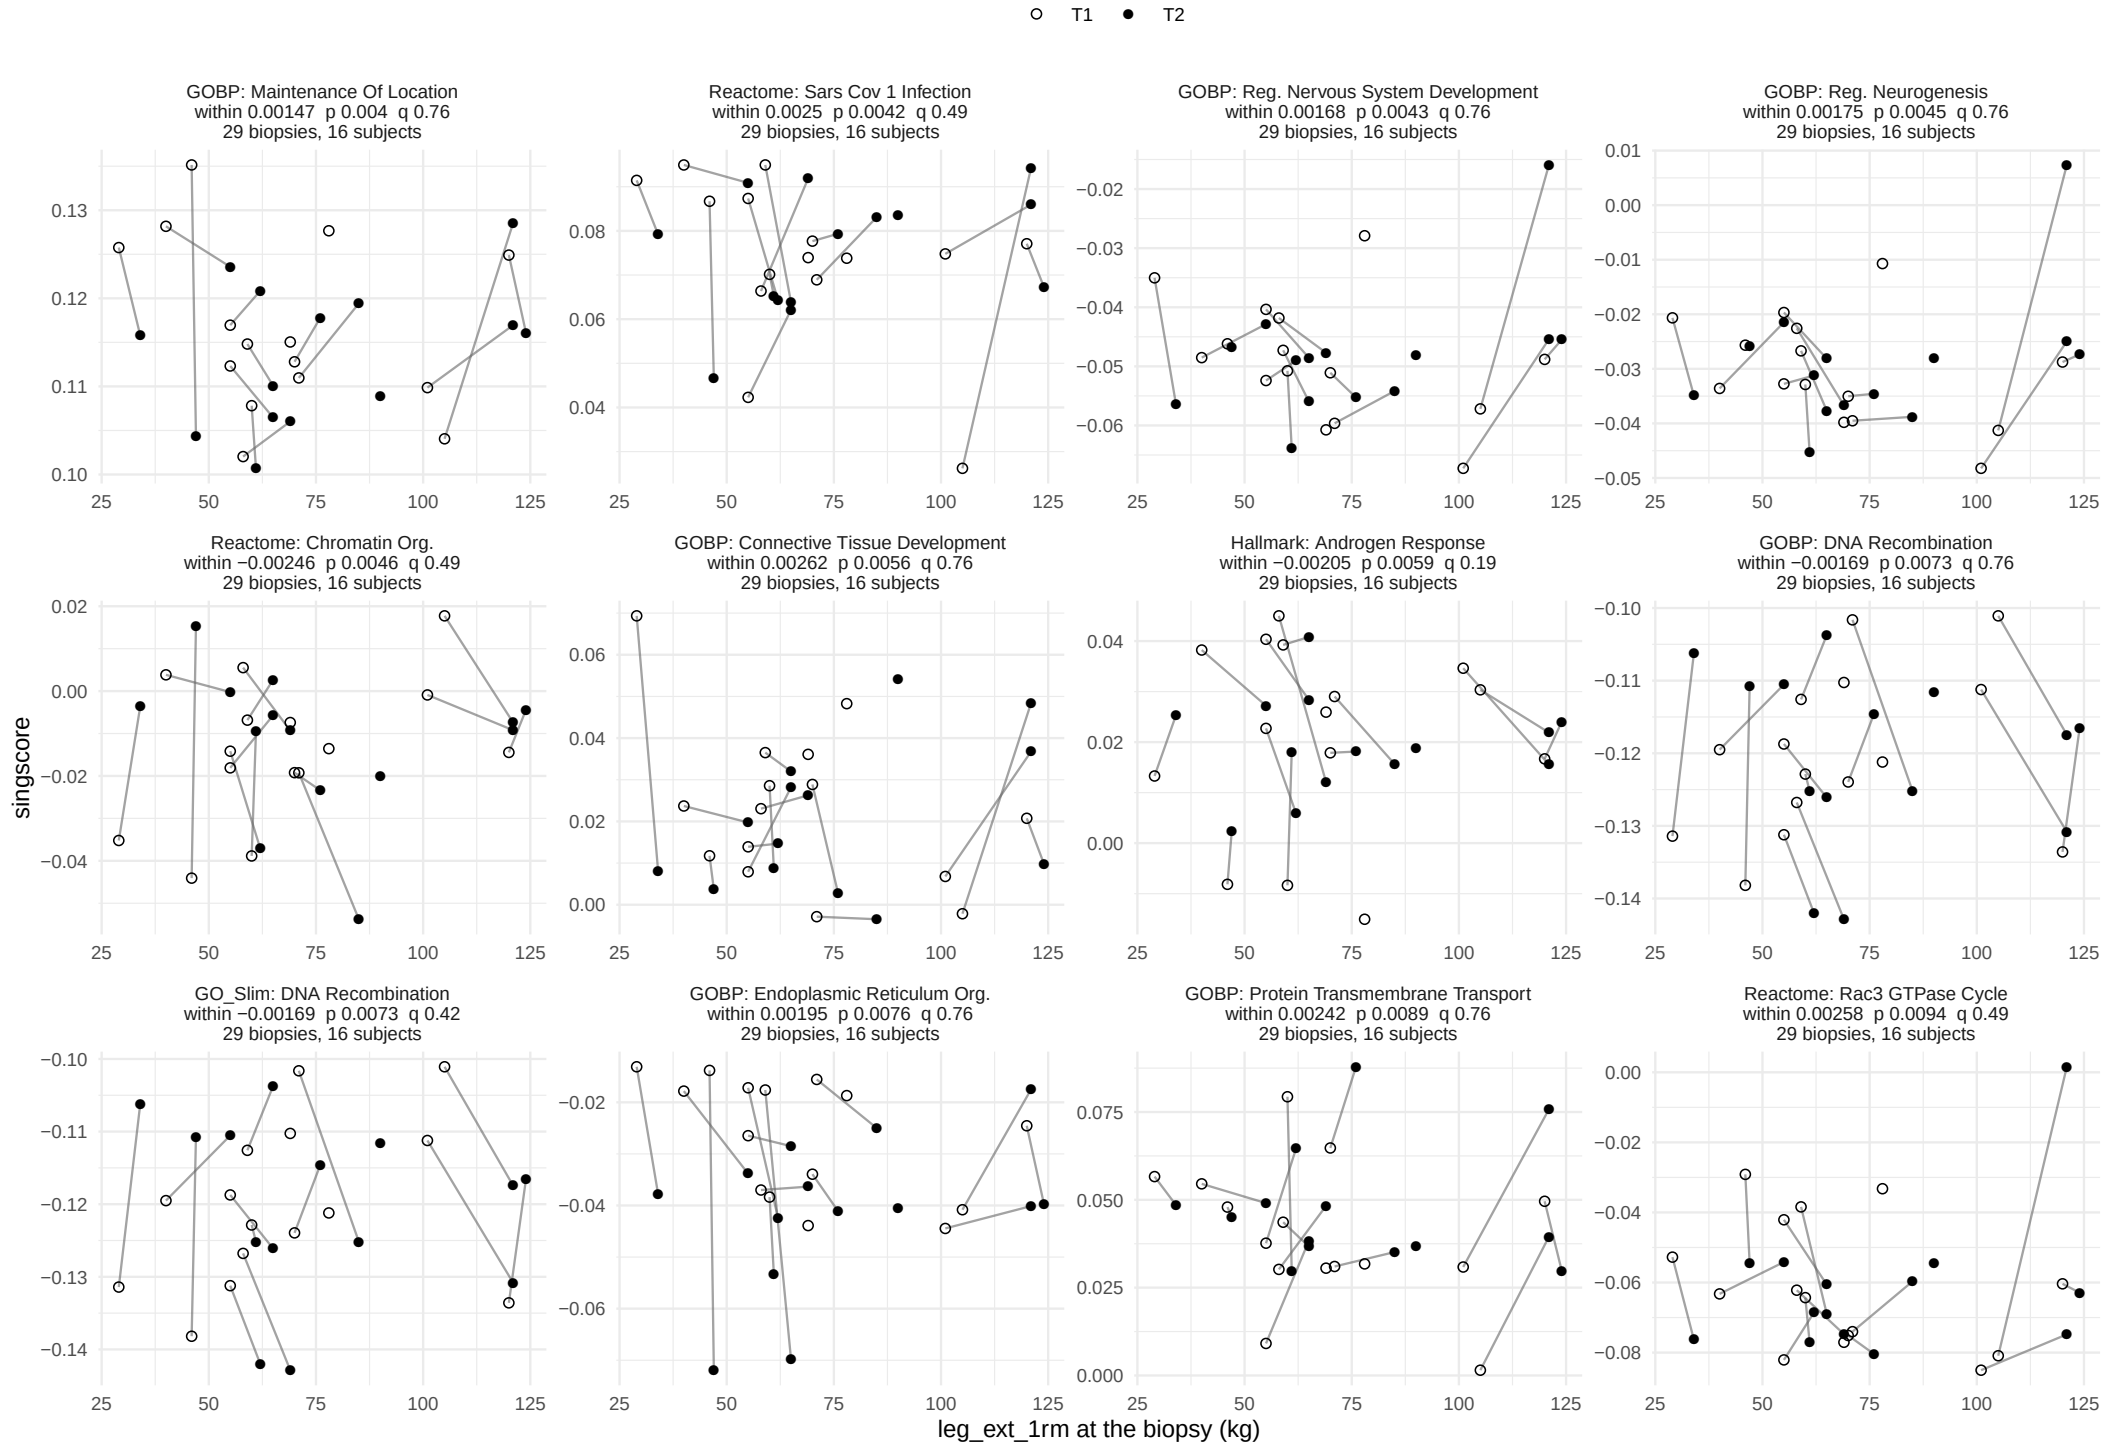

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: slope per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/set_trait_associations.xlsx, model.

leg_ext_1rm, within−person term


82 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 2 of 2.

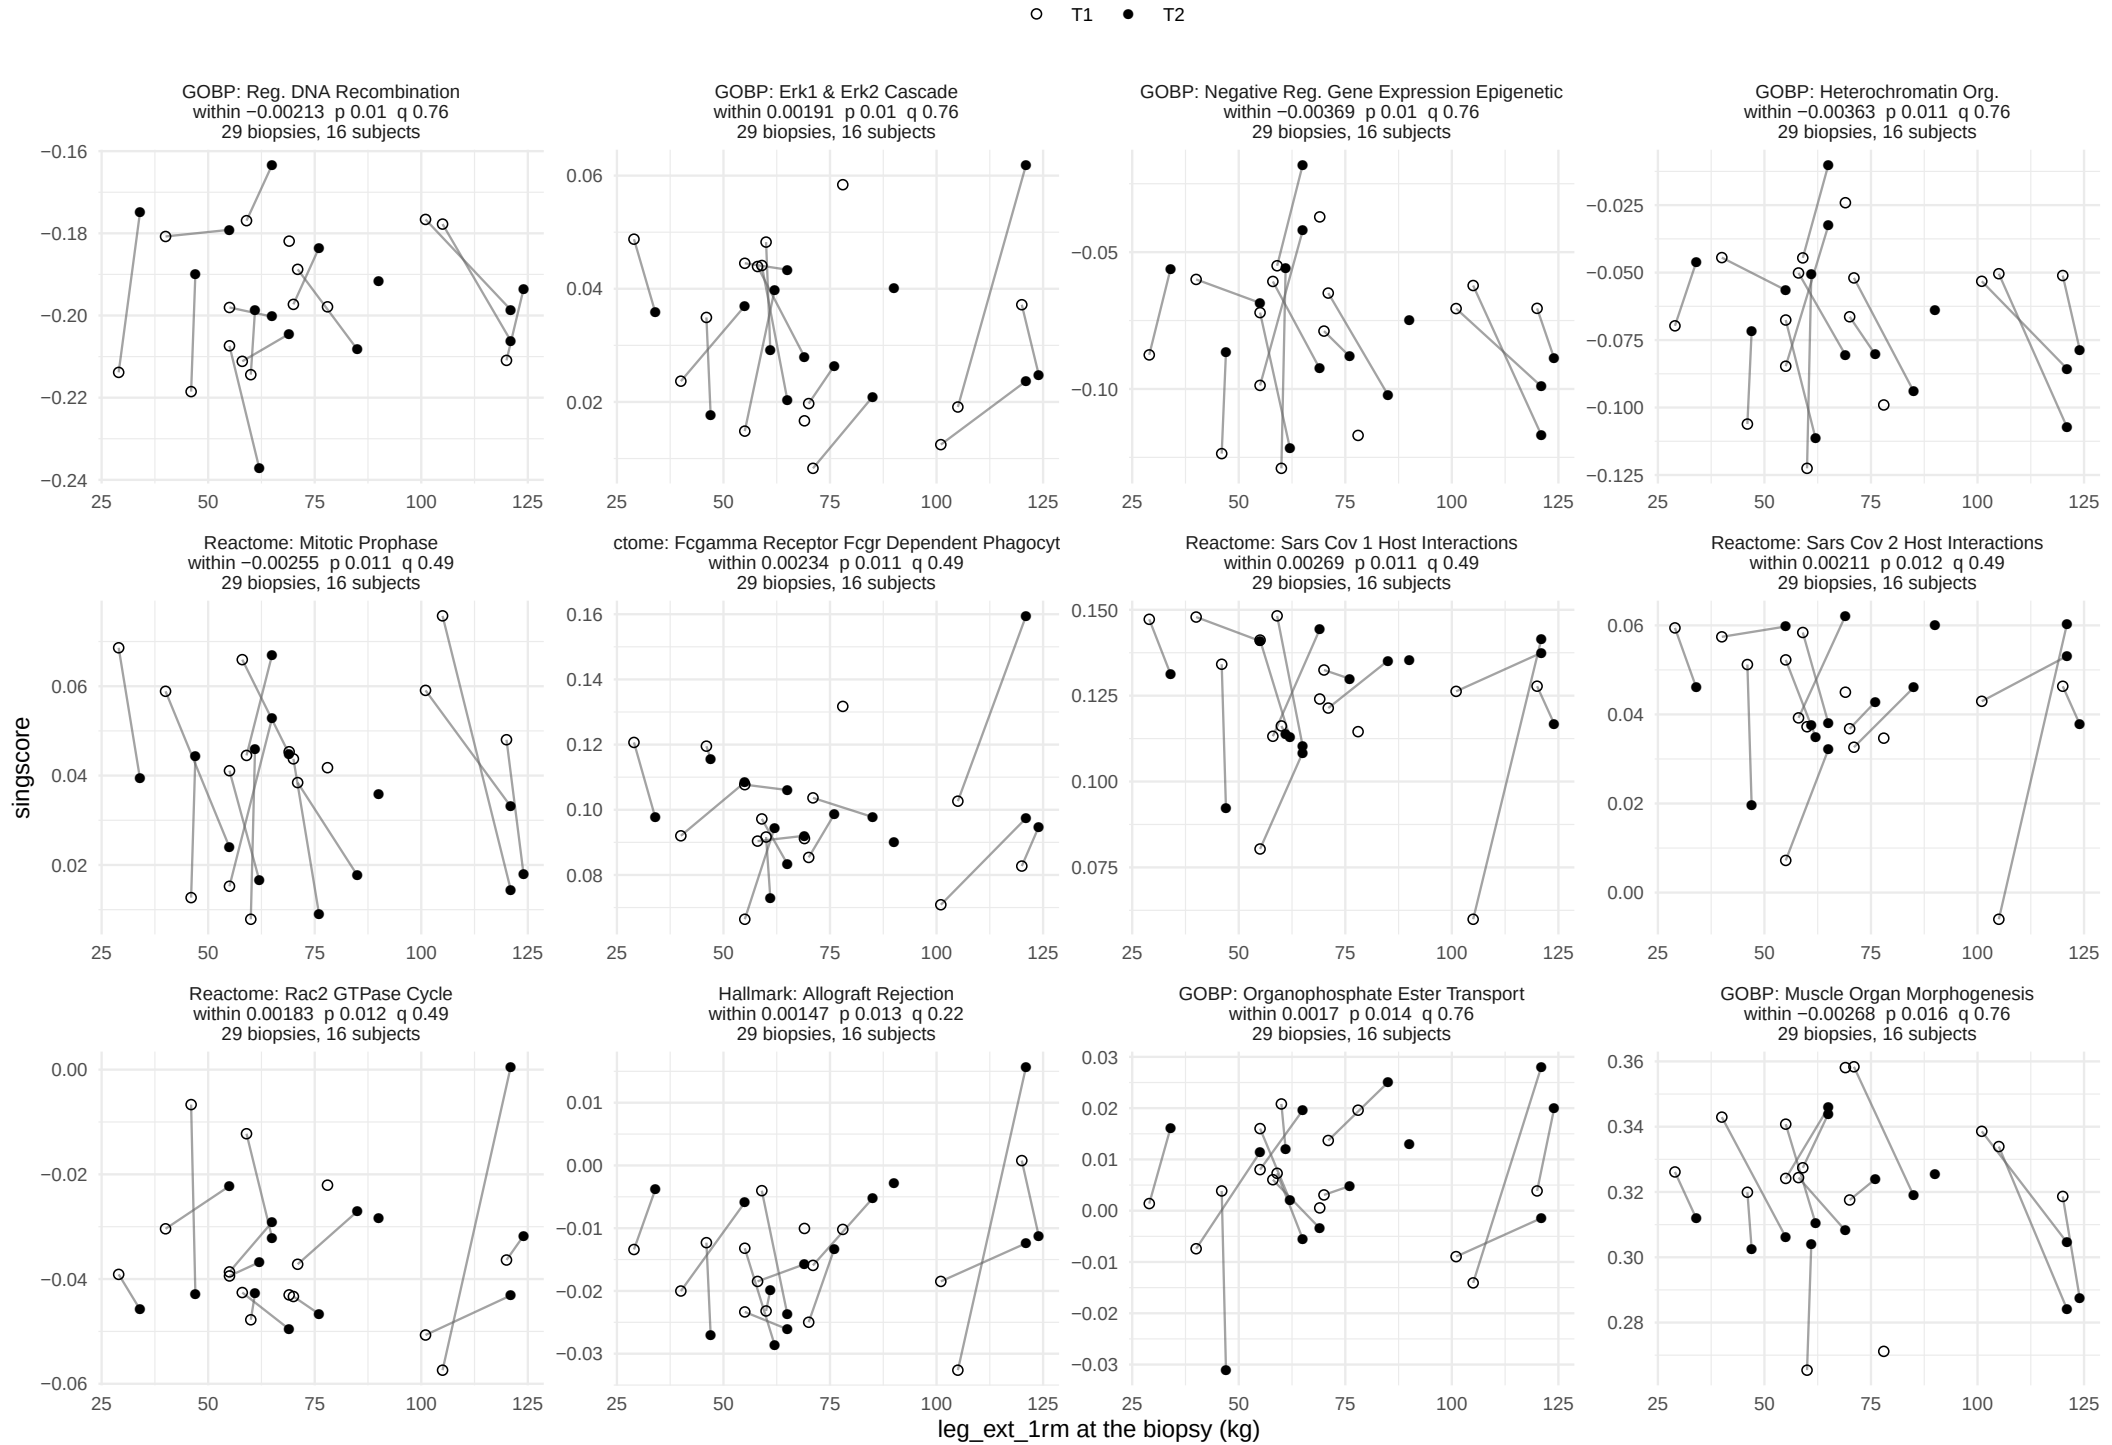

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: slope per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/set_trait_associations.xlsx, model.

leg_ext_1rm, between−person term


49 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 1 of 2.

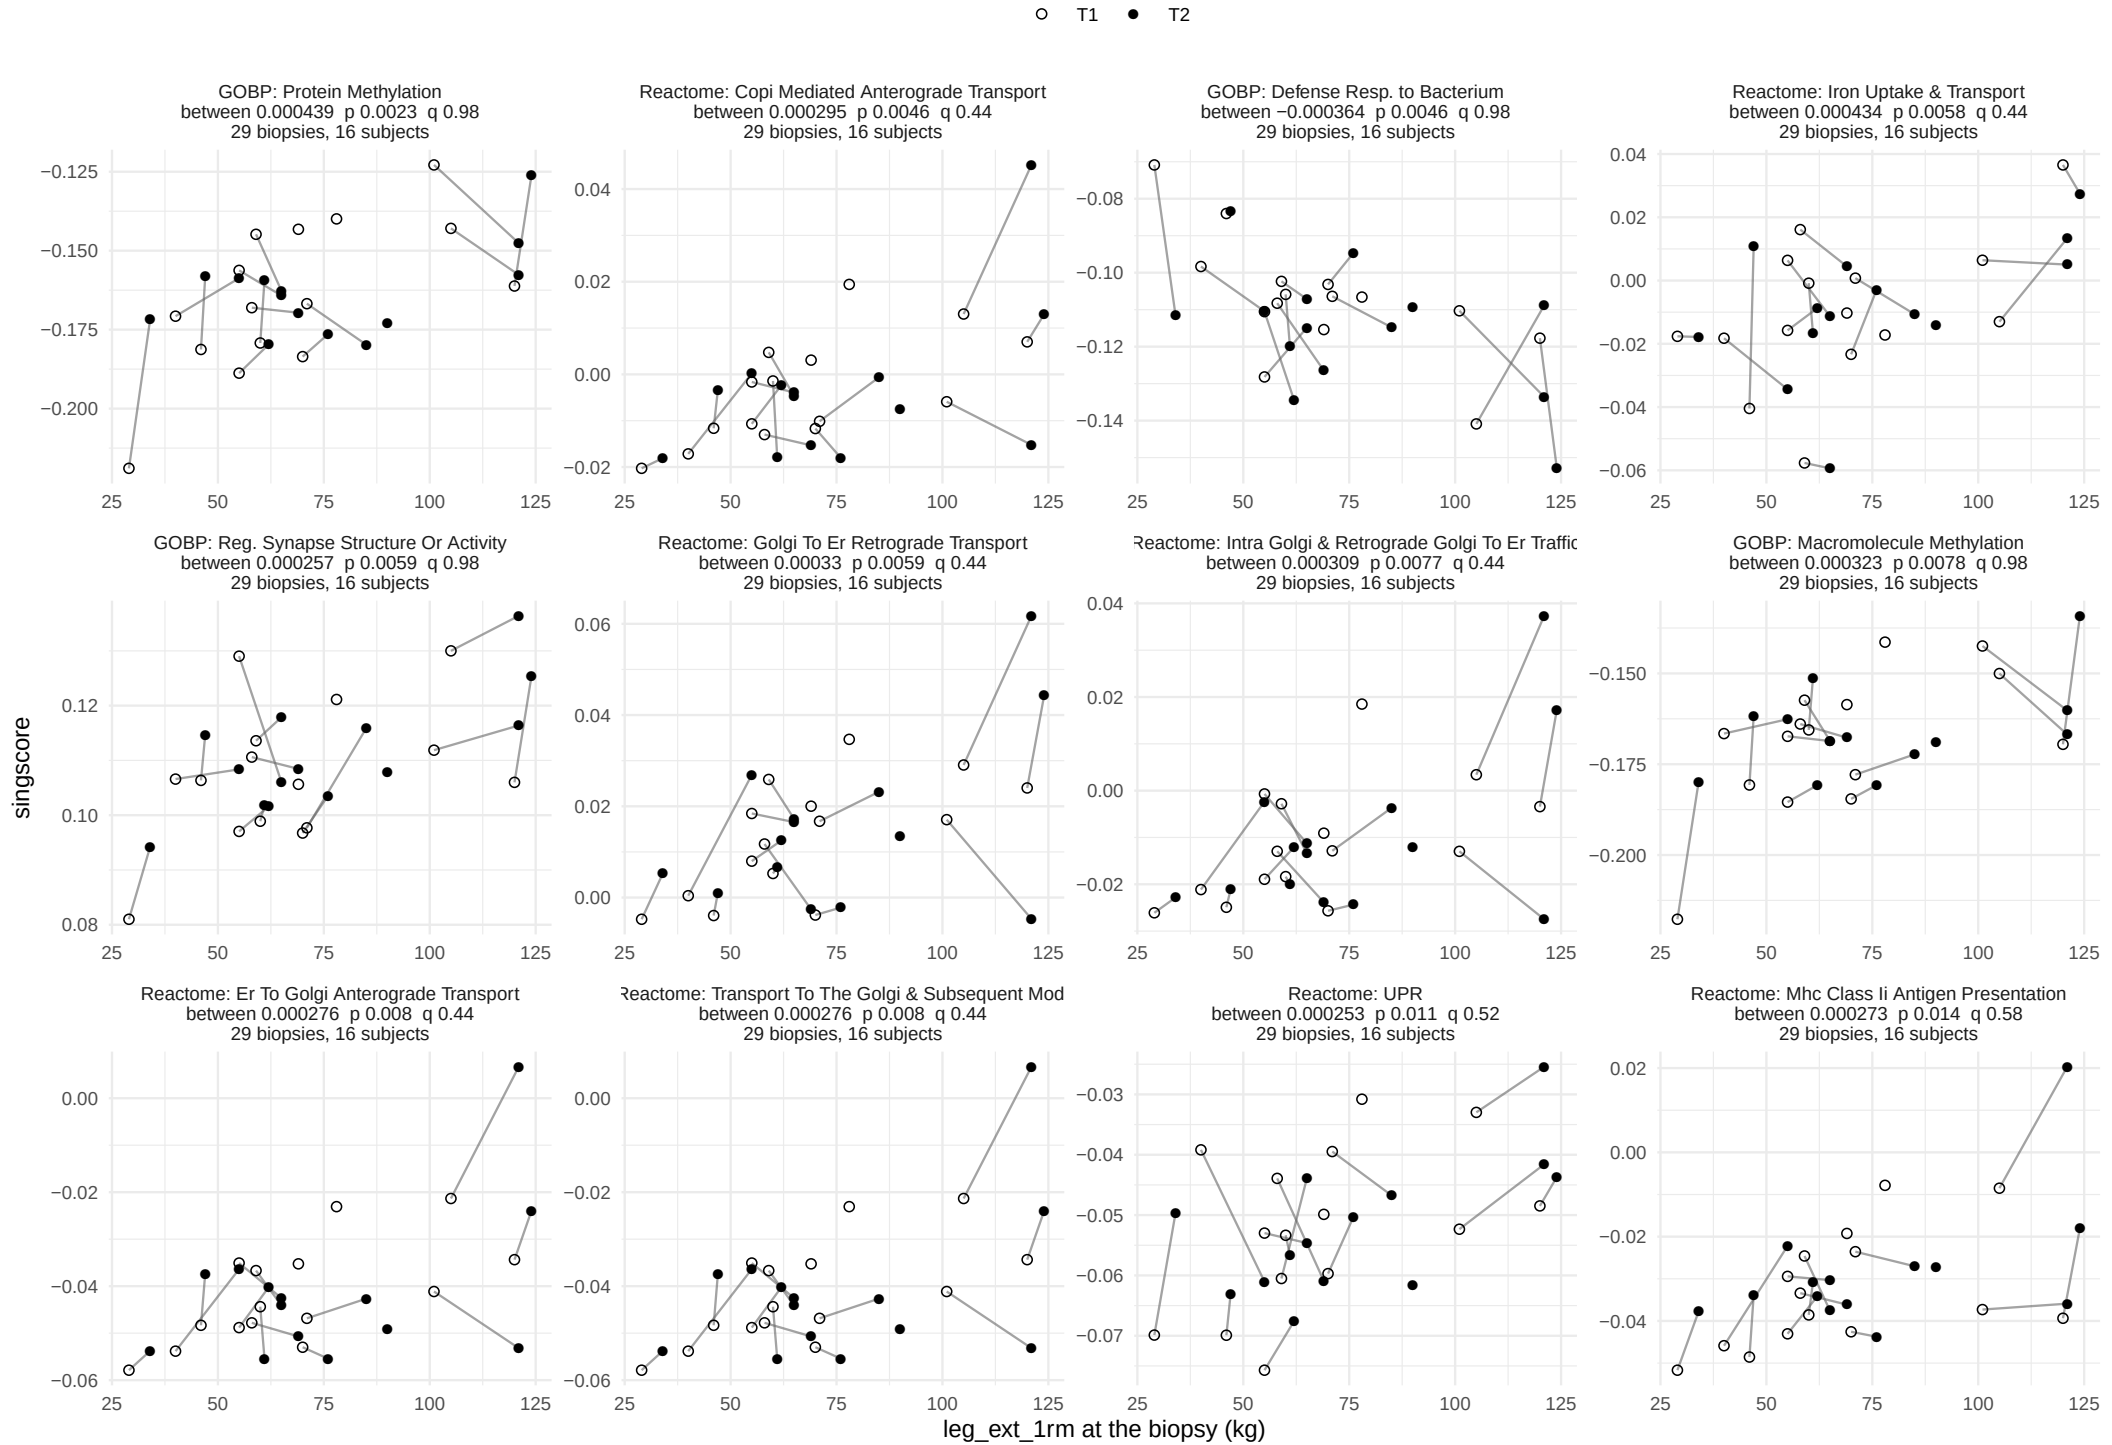

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: slope per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/set_trait_associations.xlsx, model.

leg_ext_1rm, between−person term


49 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 2 of 2.

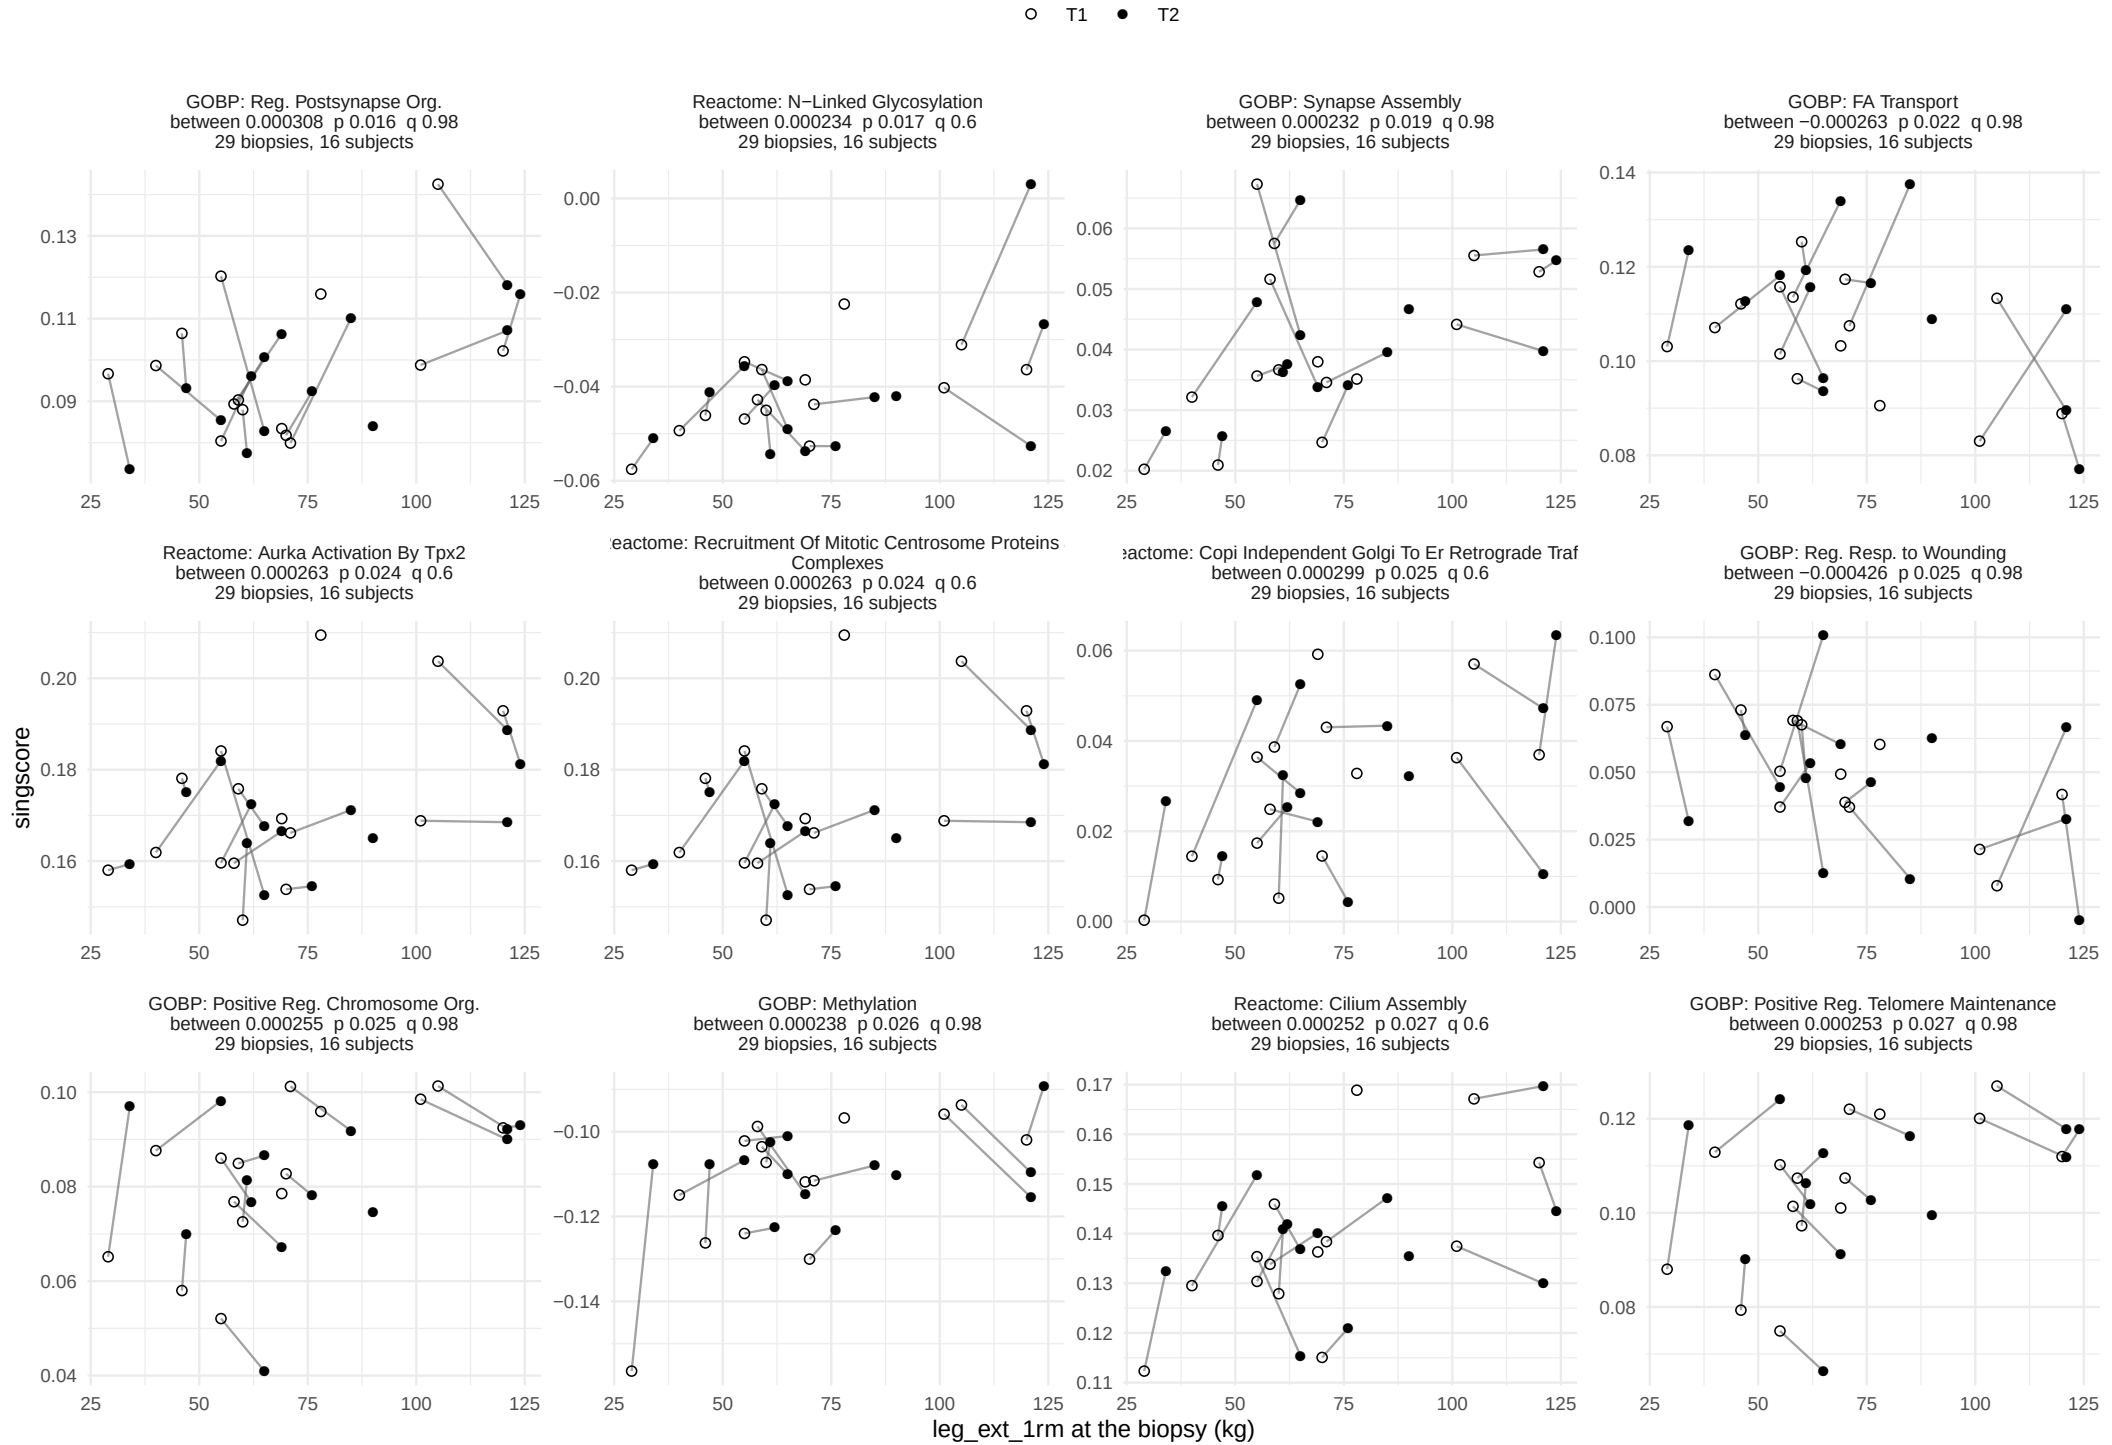

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: slope per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/set_trait_associations.xlsx, model.

Change score, training window


413 of 11024 feature−trait pairs at p < 0.05, 1 at BH < 0.05. Page 1 of 2.

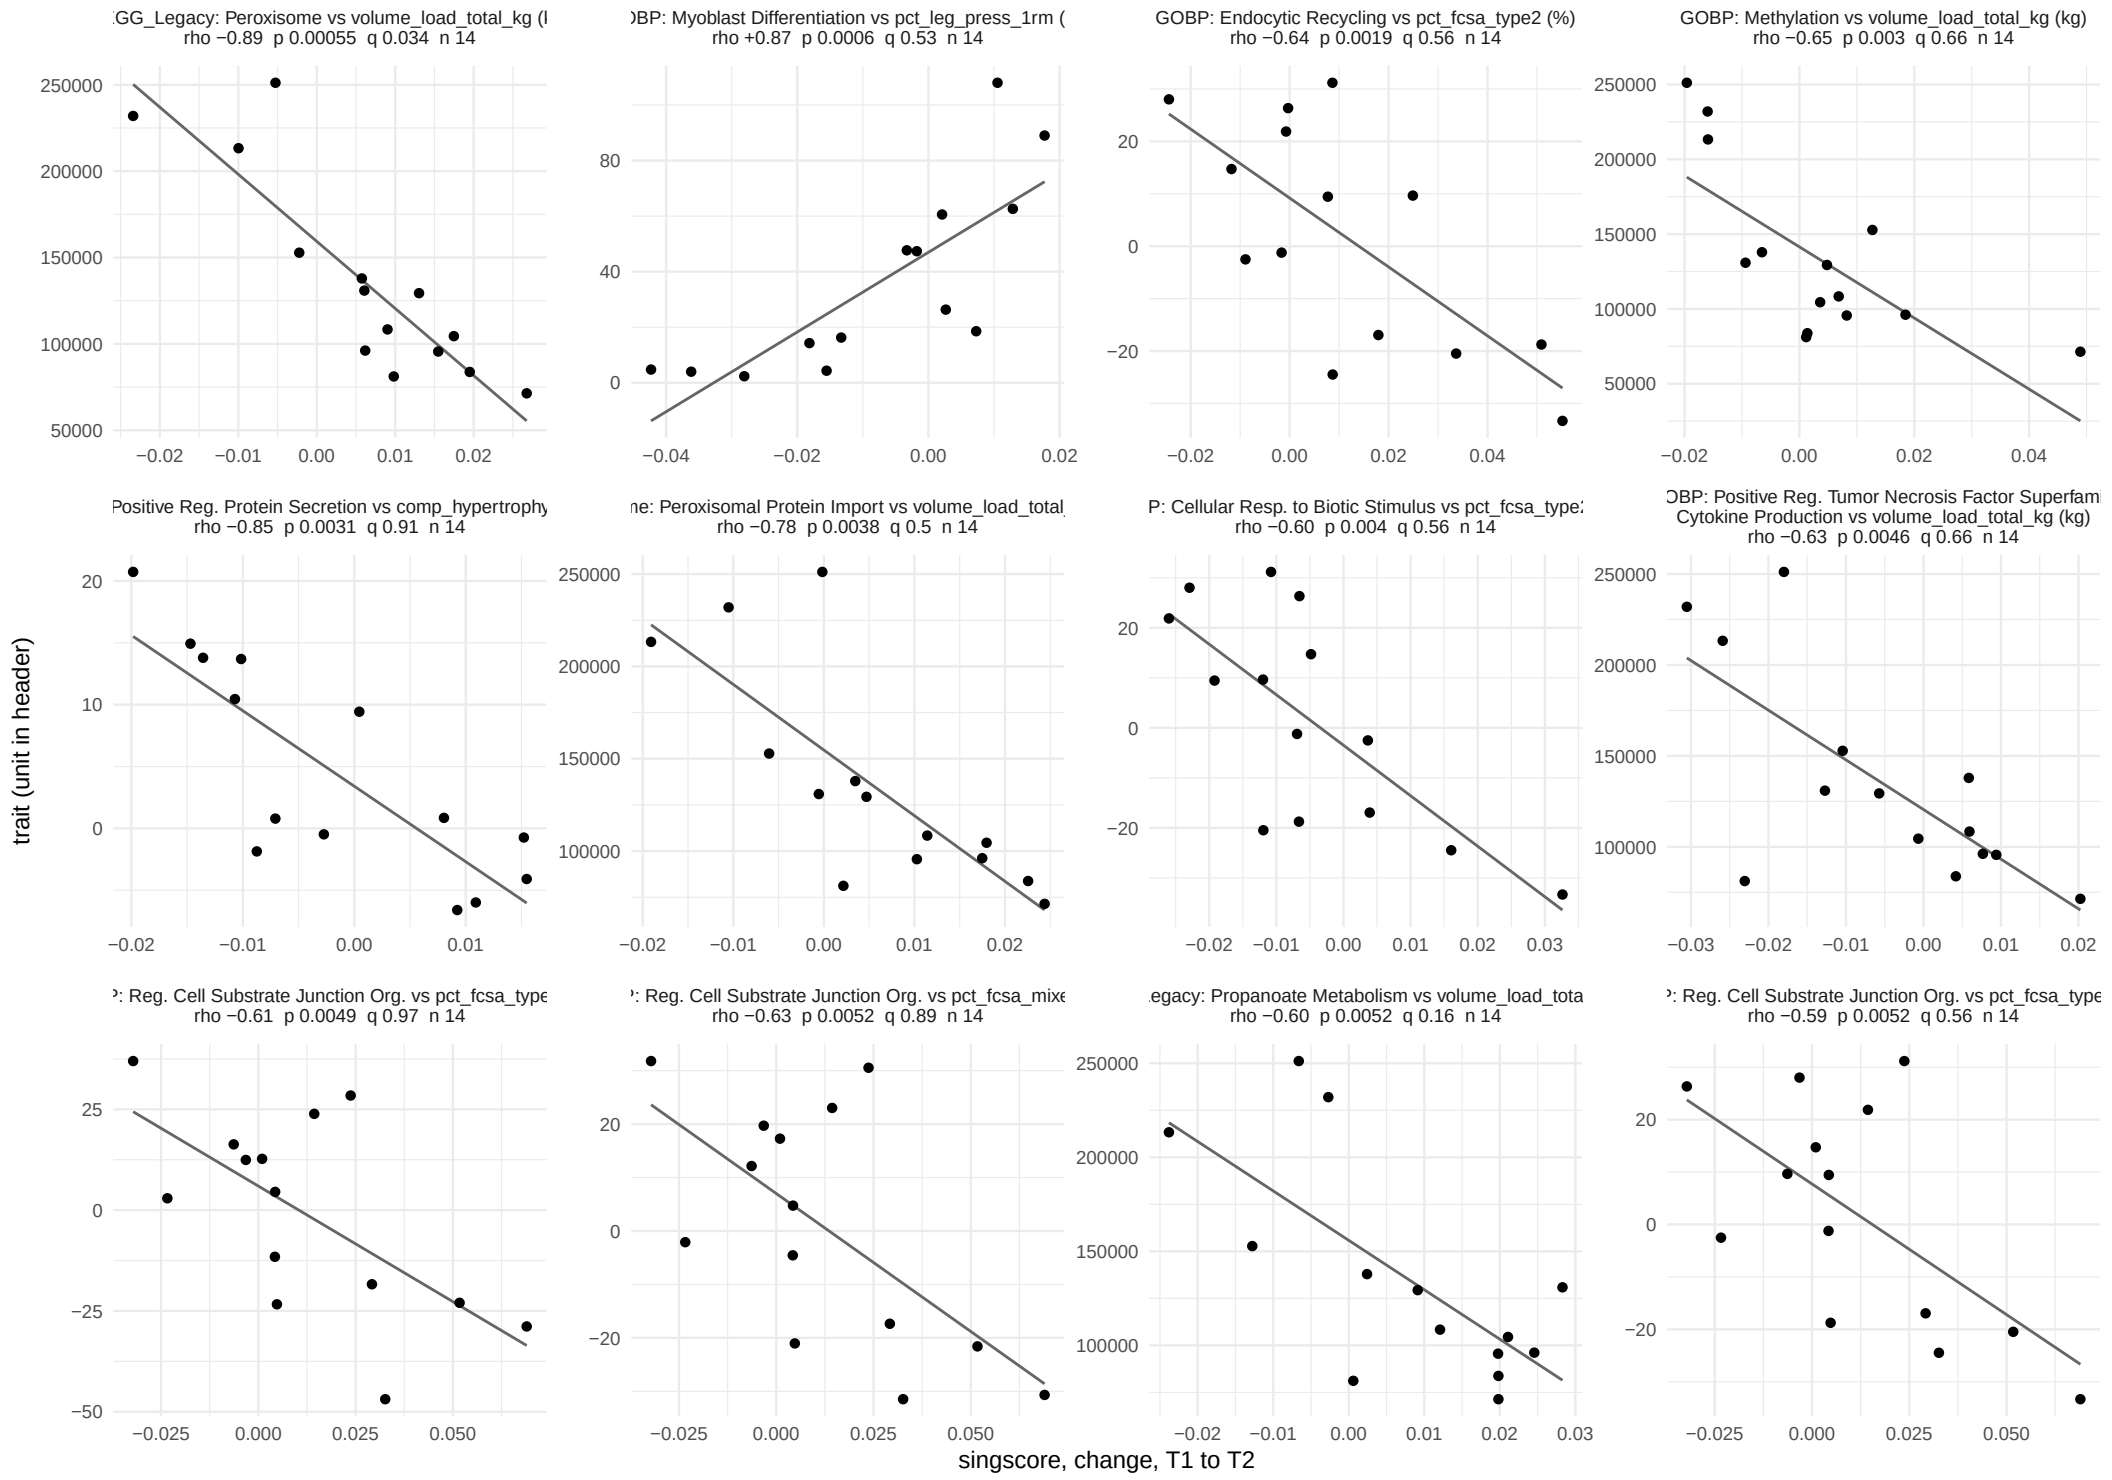

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, trait and collection, with the subjects used. Table: c_data/set_trait_associations.xlsx, change_score.

Change score, training window


413 of 11024 feature−trait pairs at p < 0.05, 1 at BH < 0.05. Page 2 of 2.

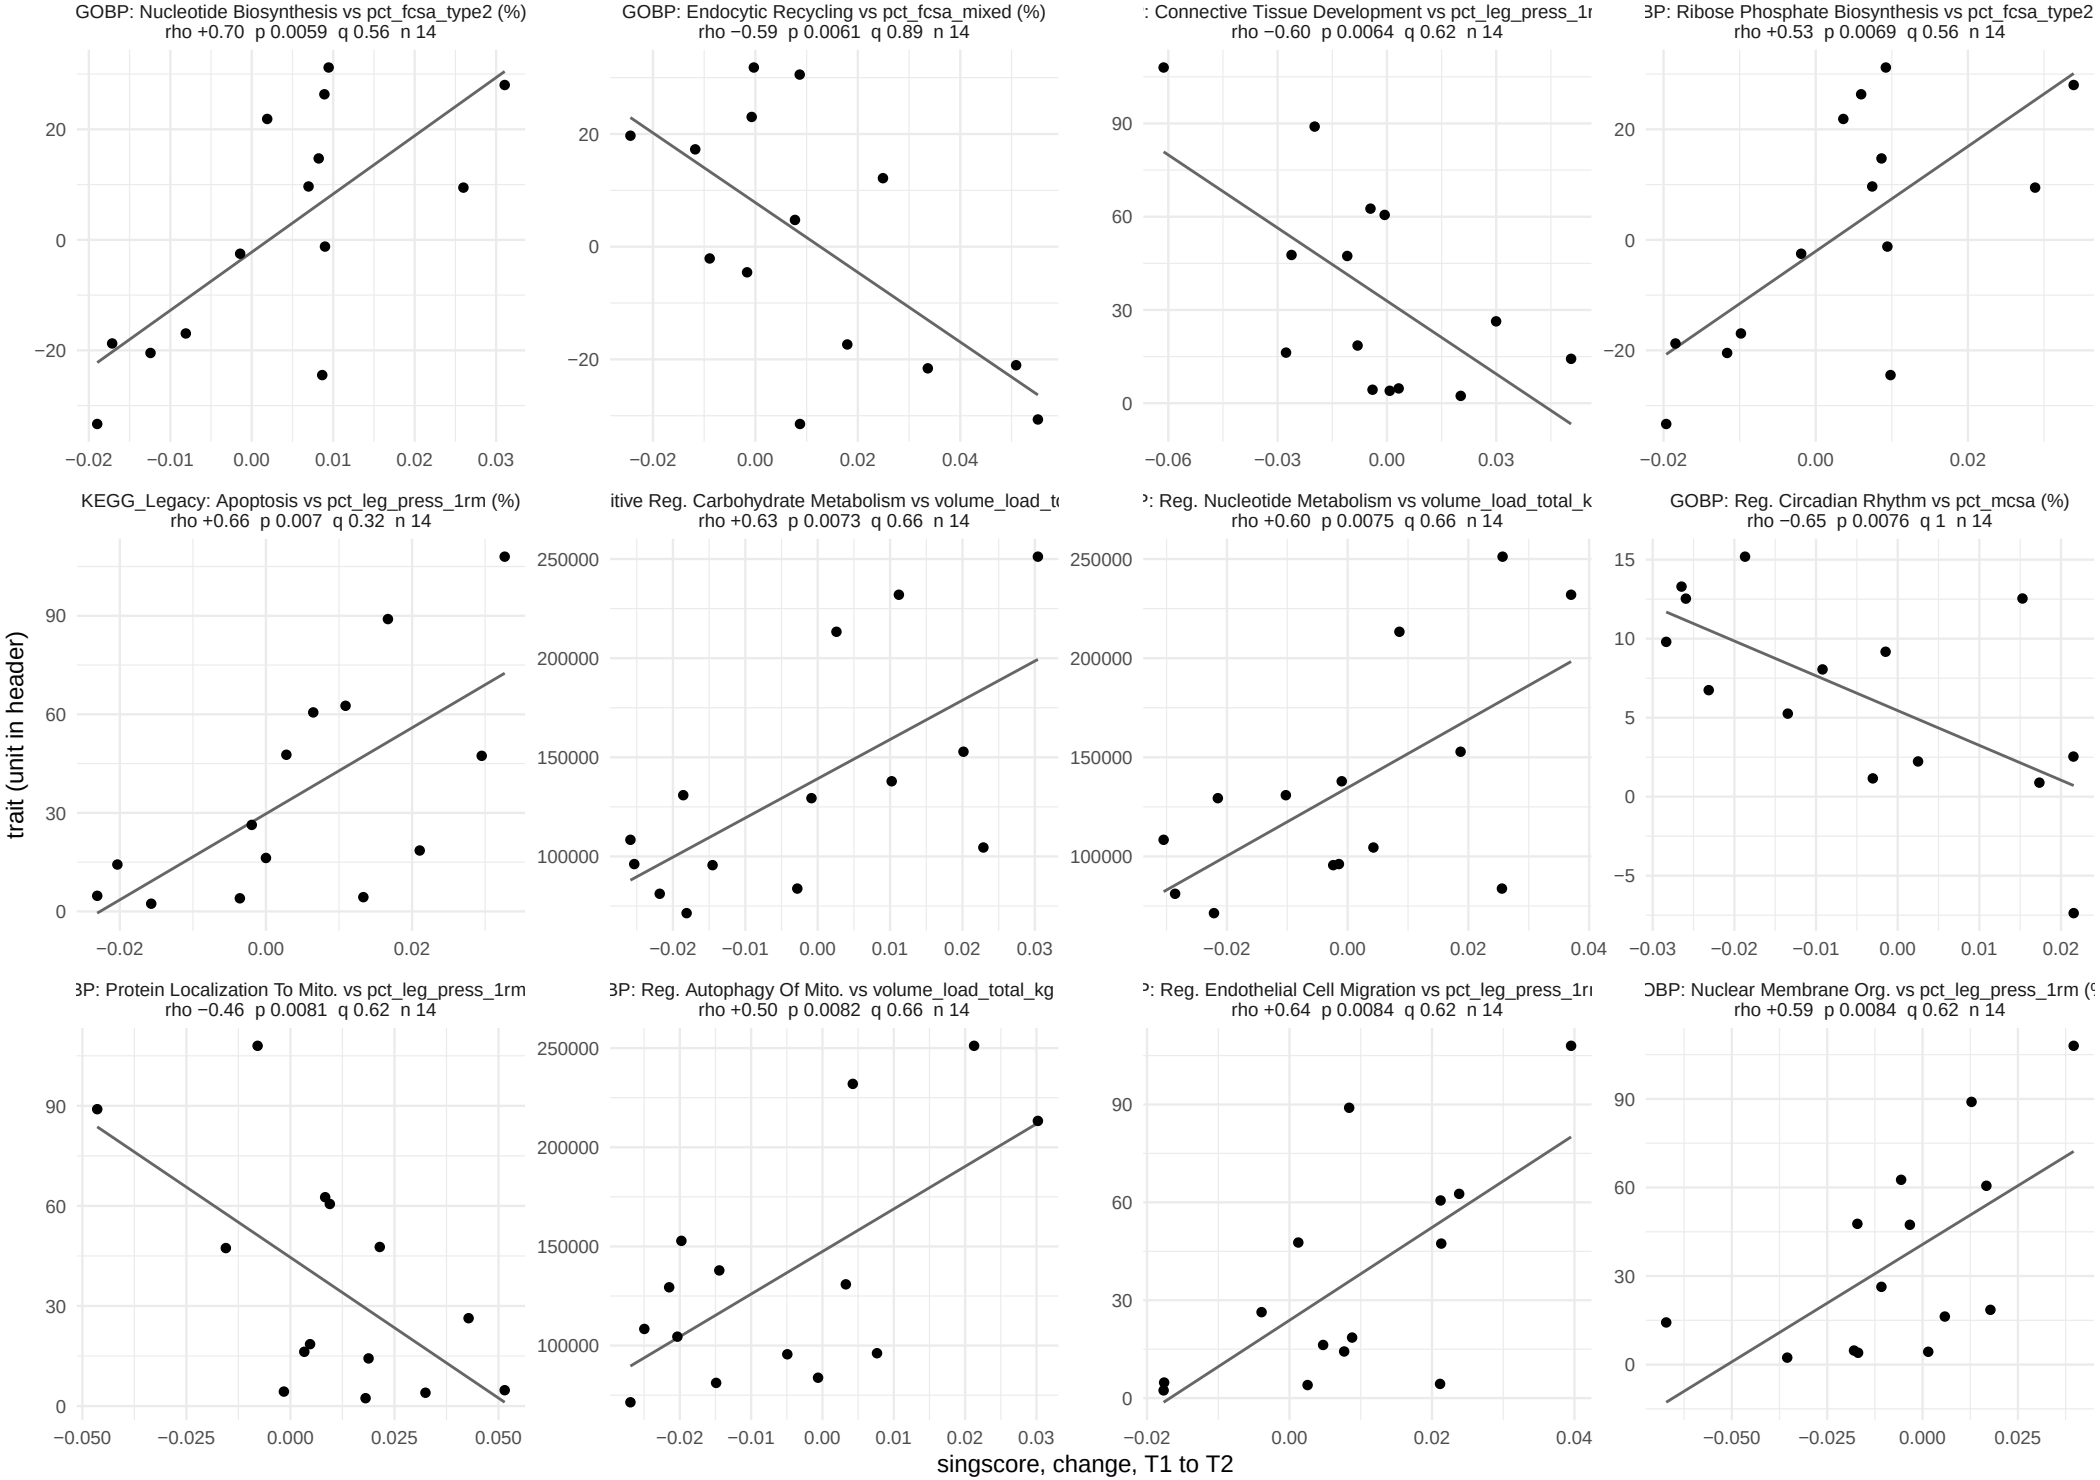

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, trait and collection, with the subjects used. Table: c_data/set_trait_associations.xlsx, change_score.

Change score, baseline window


439 of 11024 feature−trait pairs at p < 0.05, 1 at BH < 0.05. Page 1 of 2.

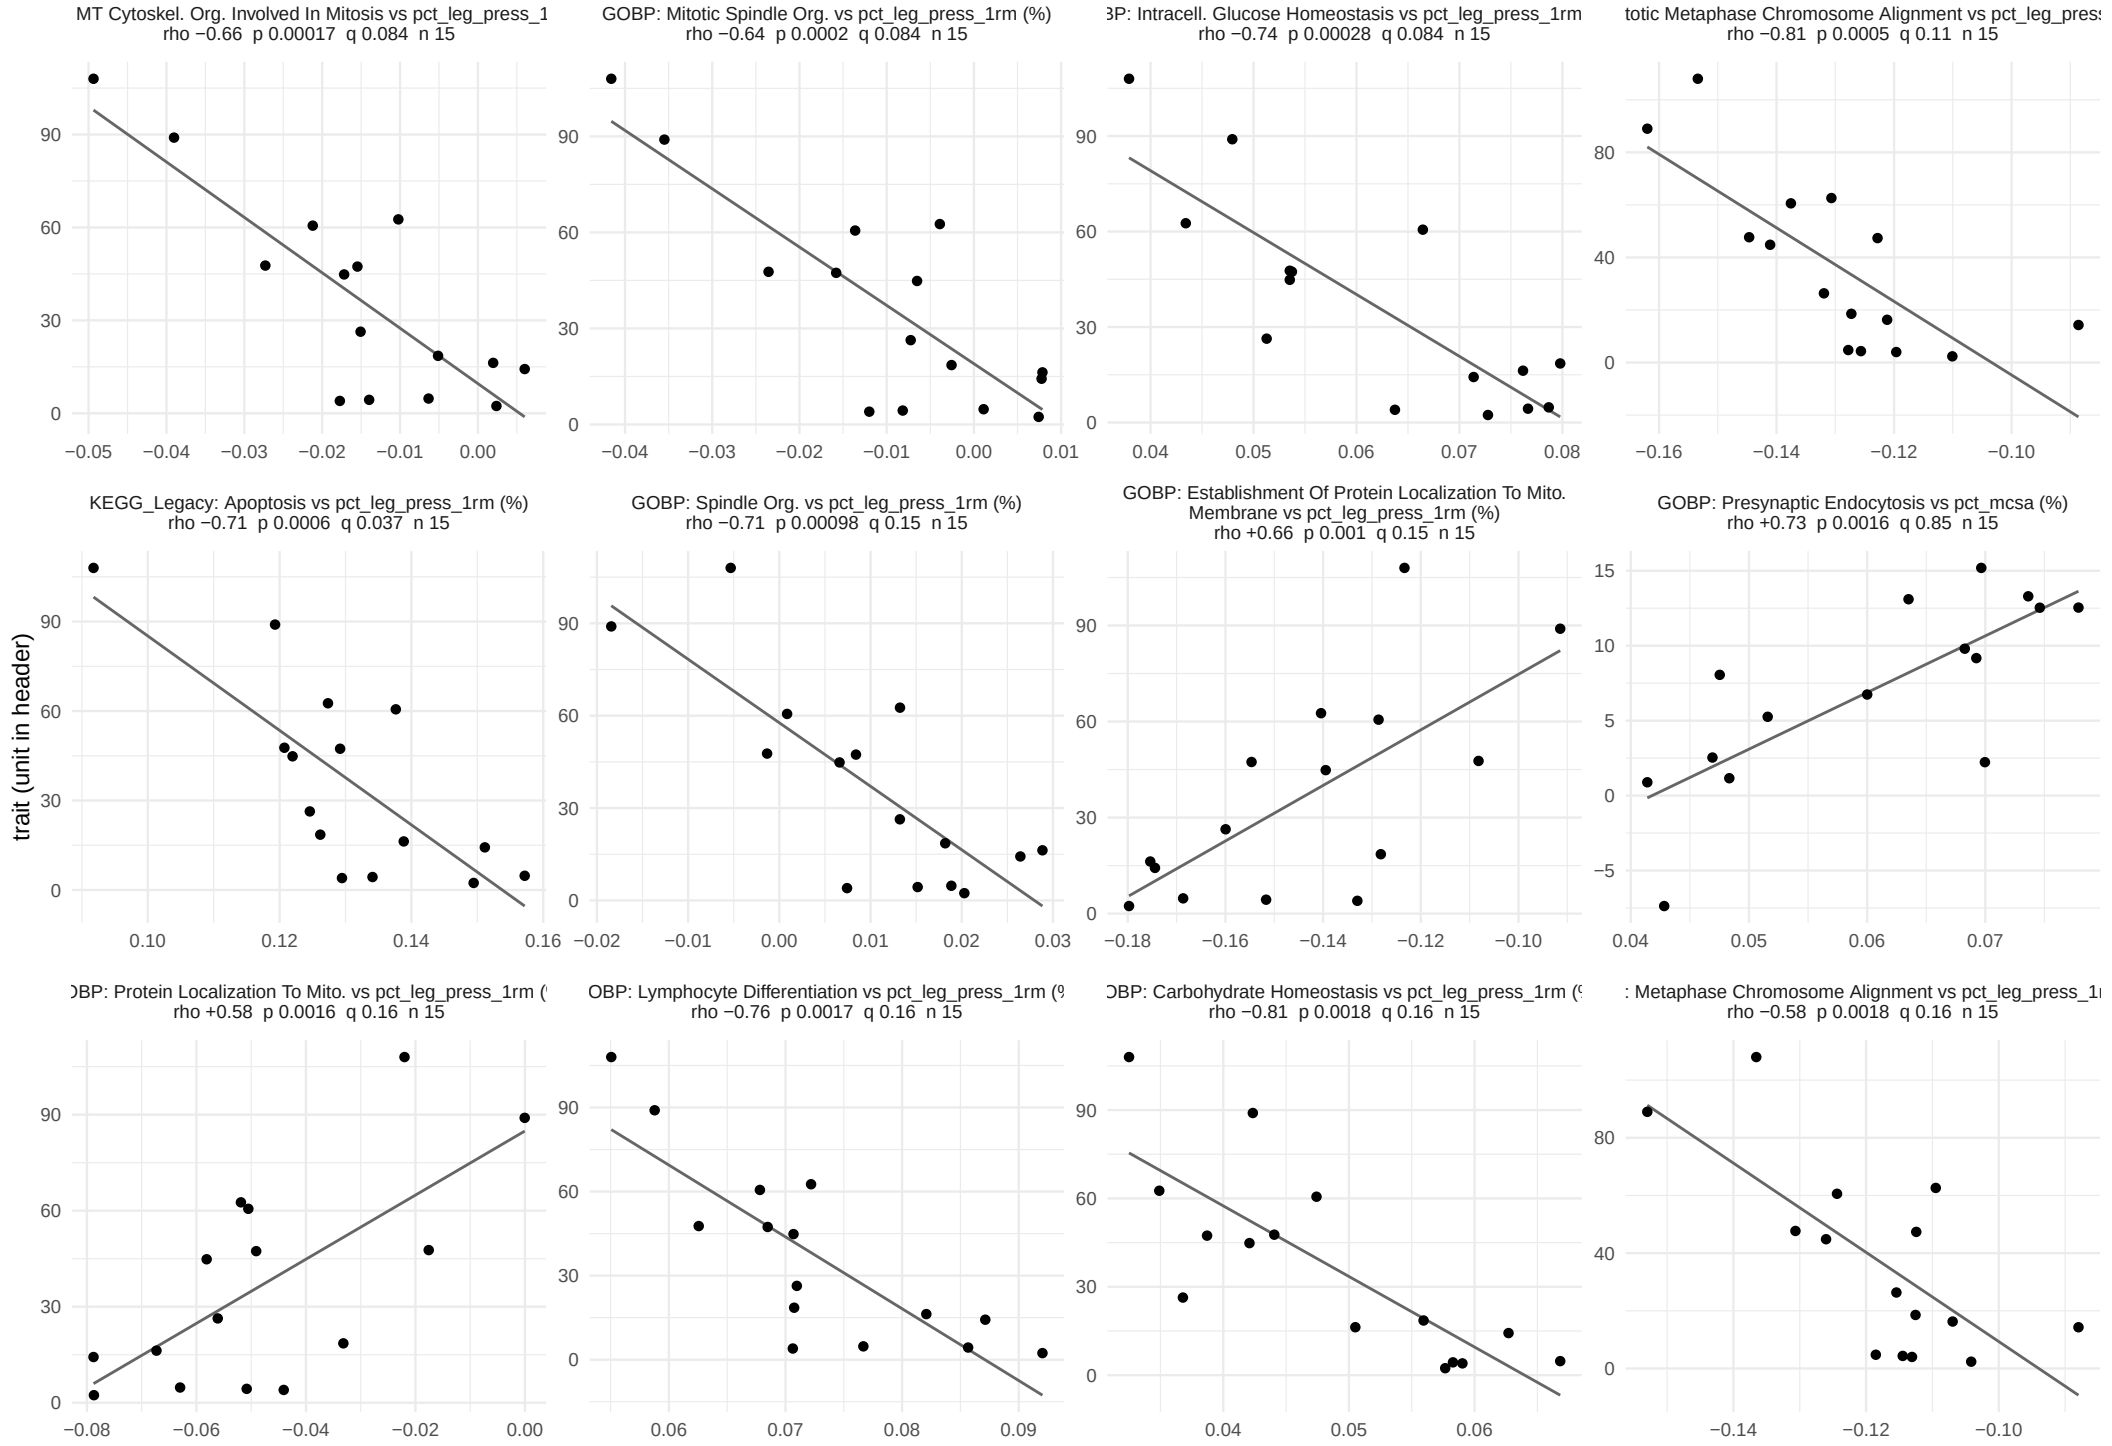

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, trait and collection, with the subjects used. Table: c_data/set_trait_associations.xlsx, change_score.

Change score, baseline window


439 of 11024 feature−trait pairs at p < 0.05, 1 at BH < 0.05. Page 2 of 2.

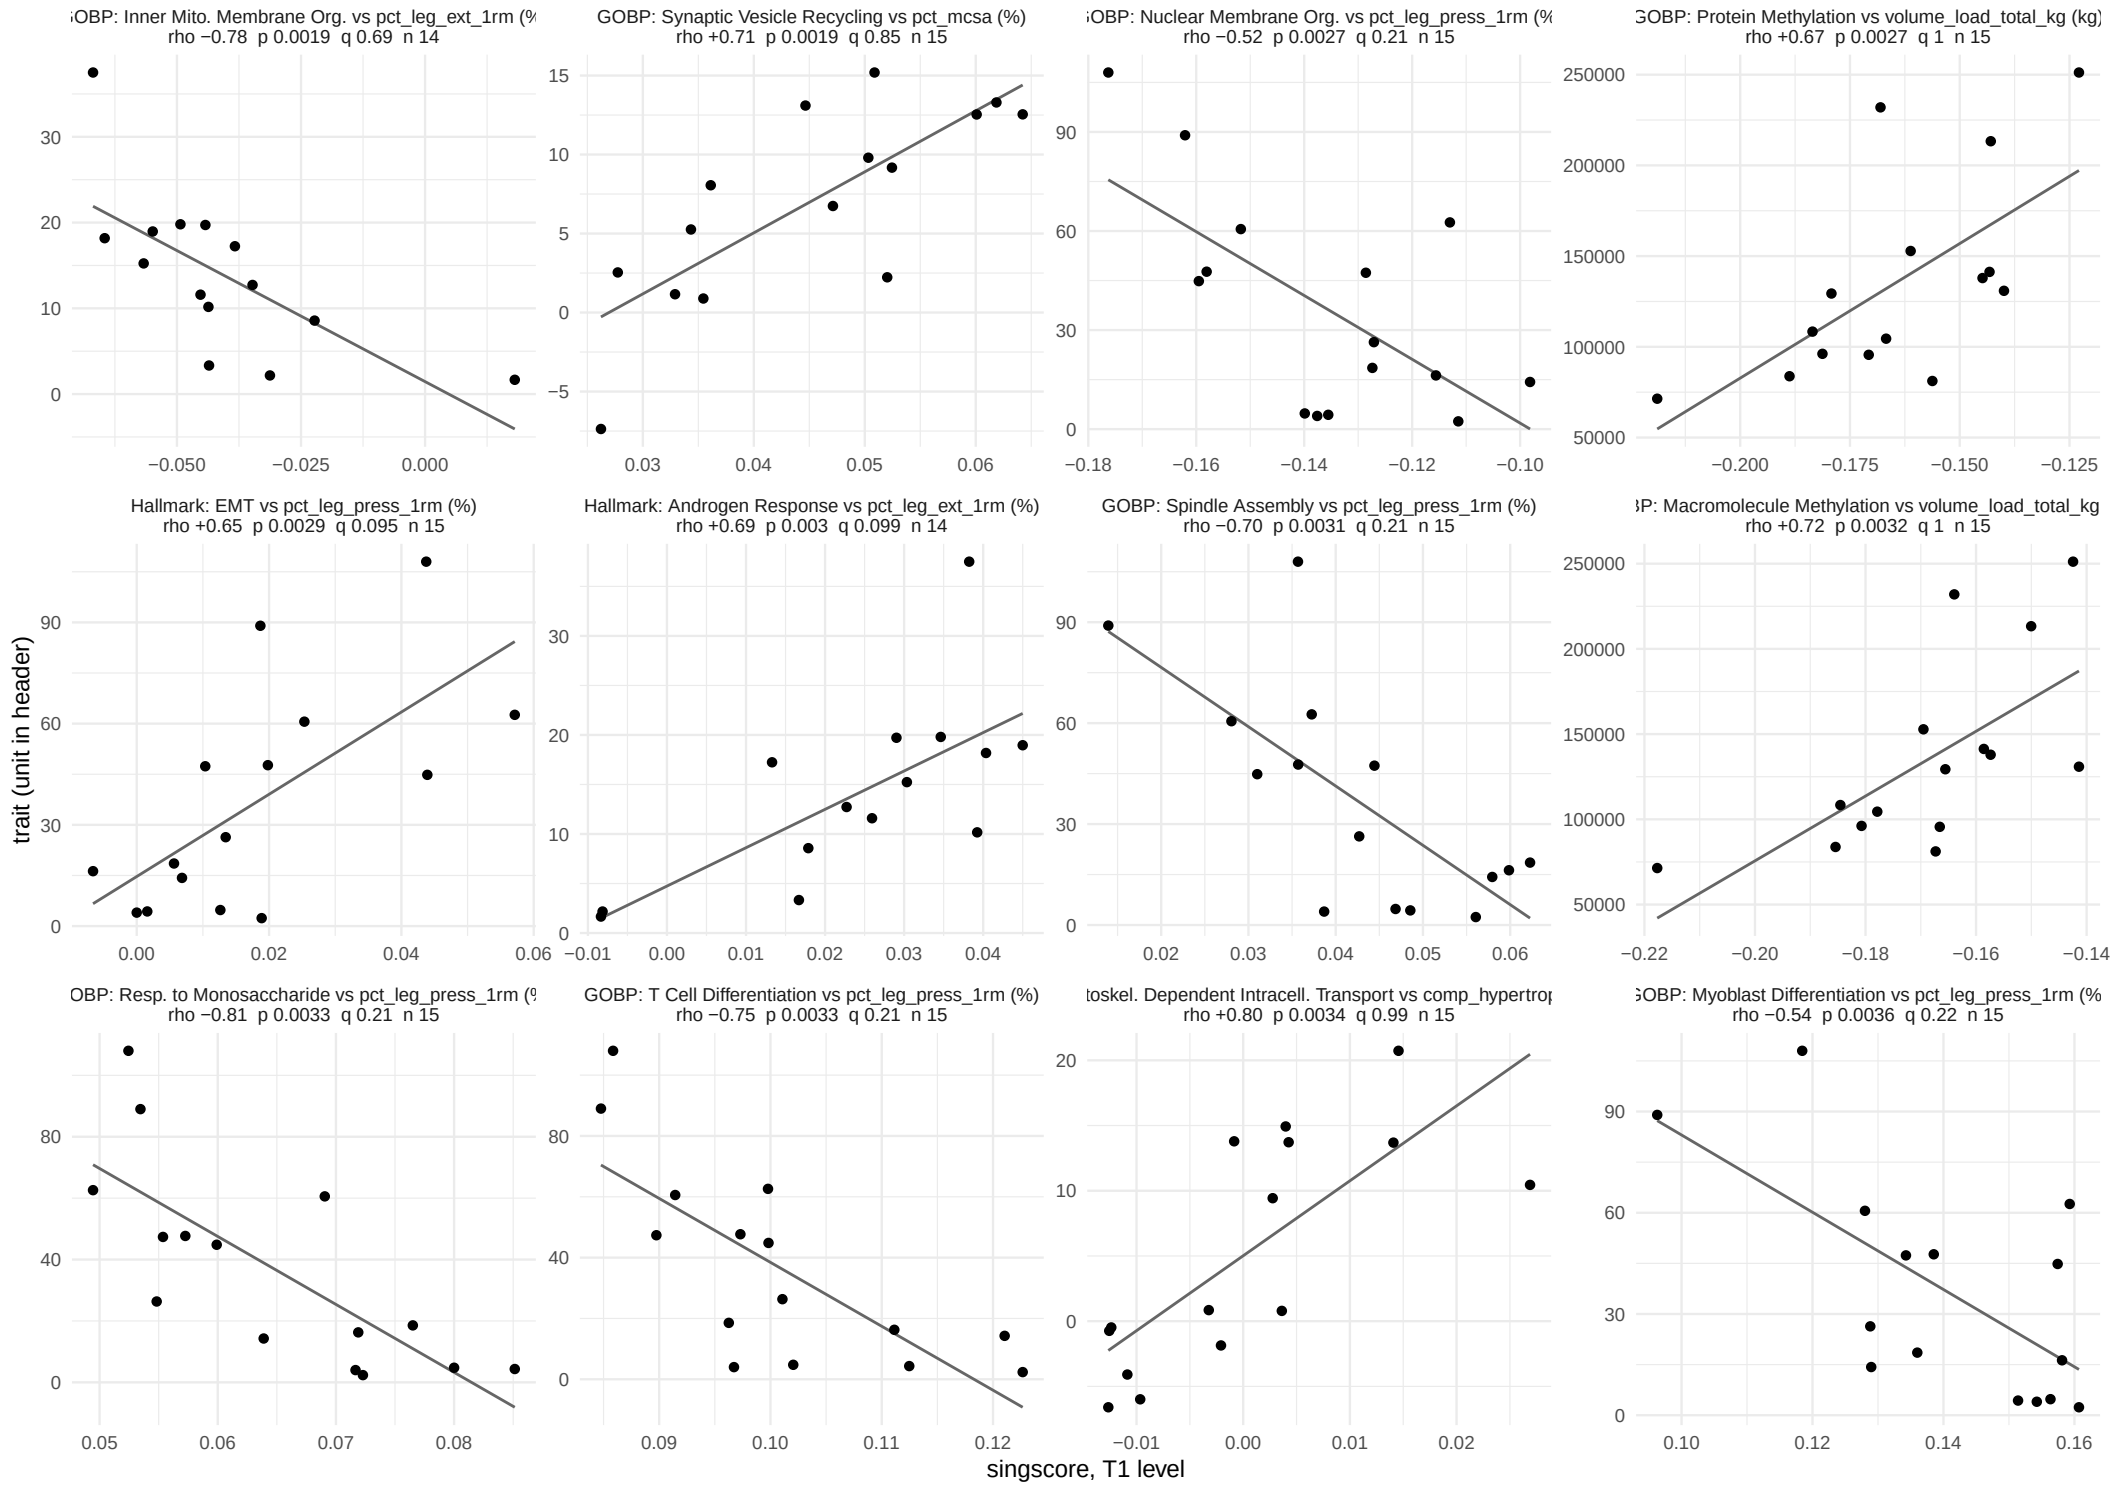

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, trait and collection, with the subjects used. Table: c_data/set_trait_associations.xlsx, change_score.

Change score, acute window


407 of 11024 feature−trait pairs at p < 0.05, 3 at BH < 0.05. Page 1 of 2.

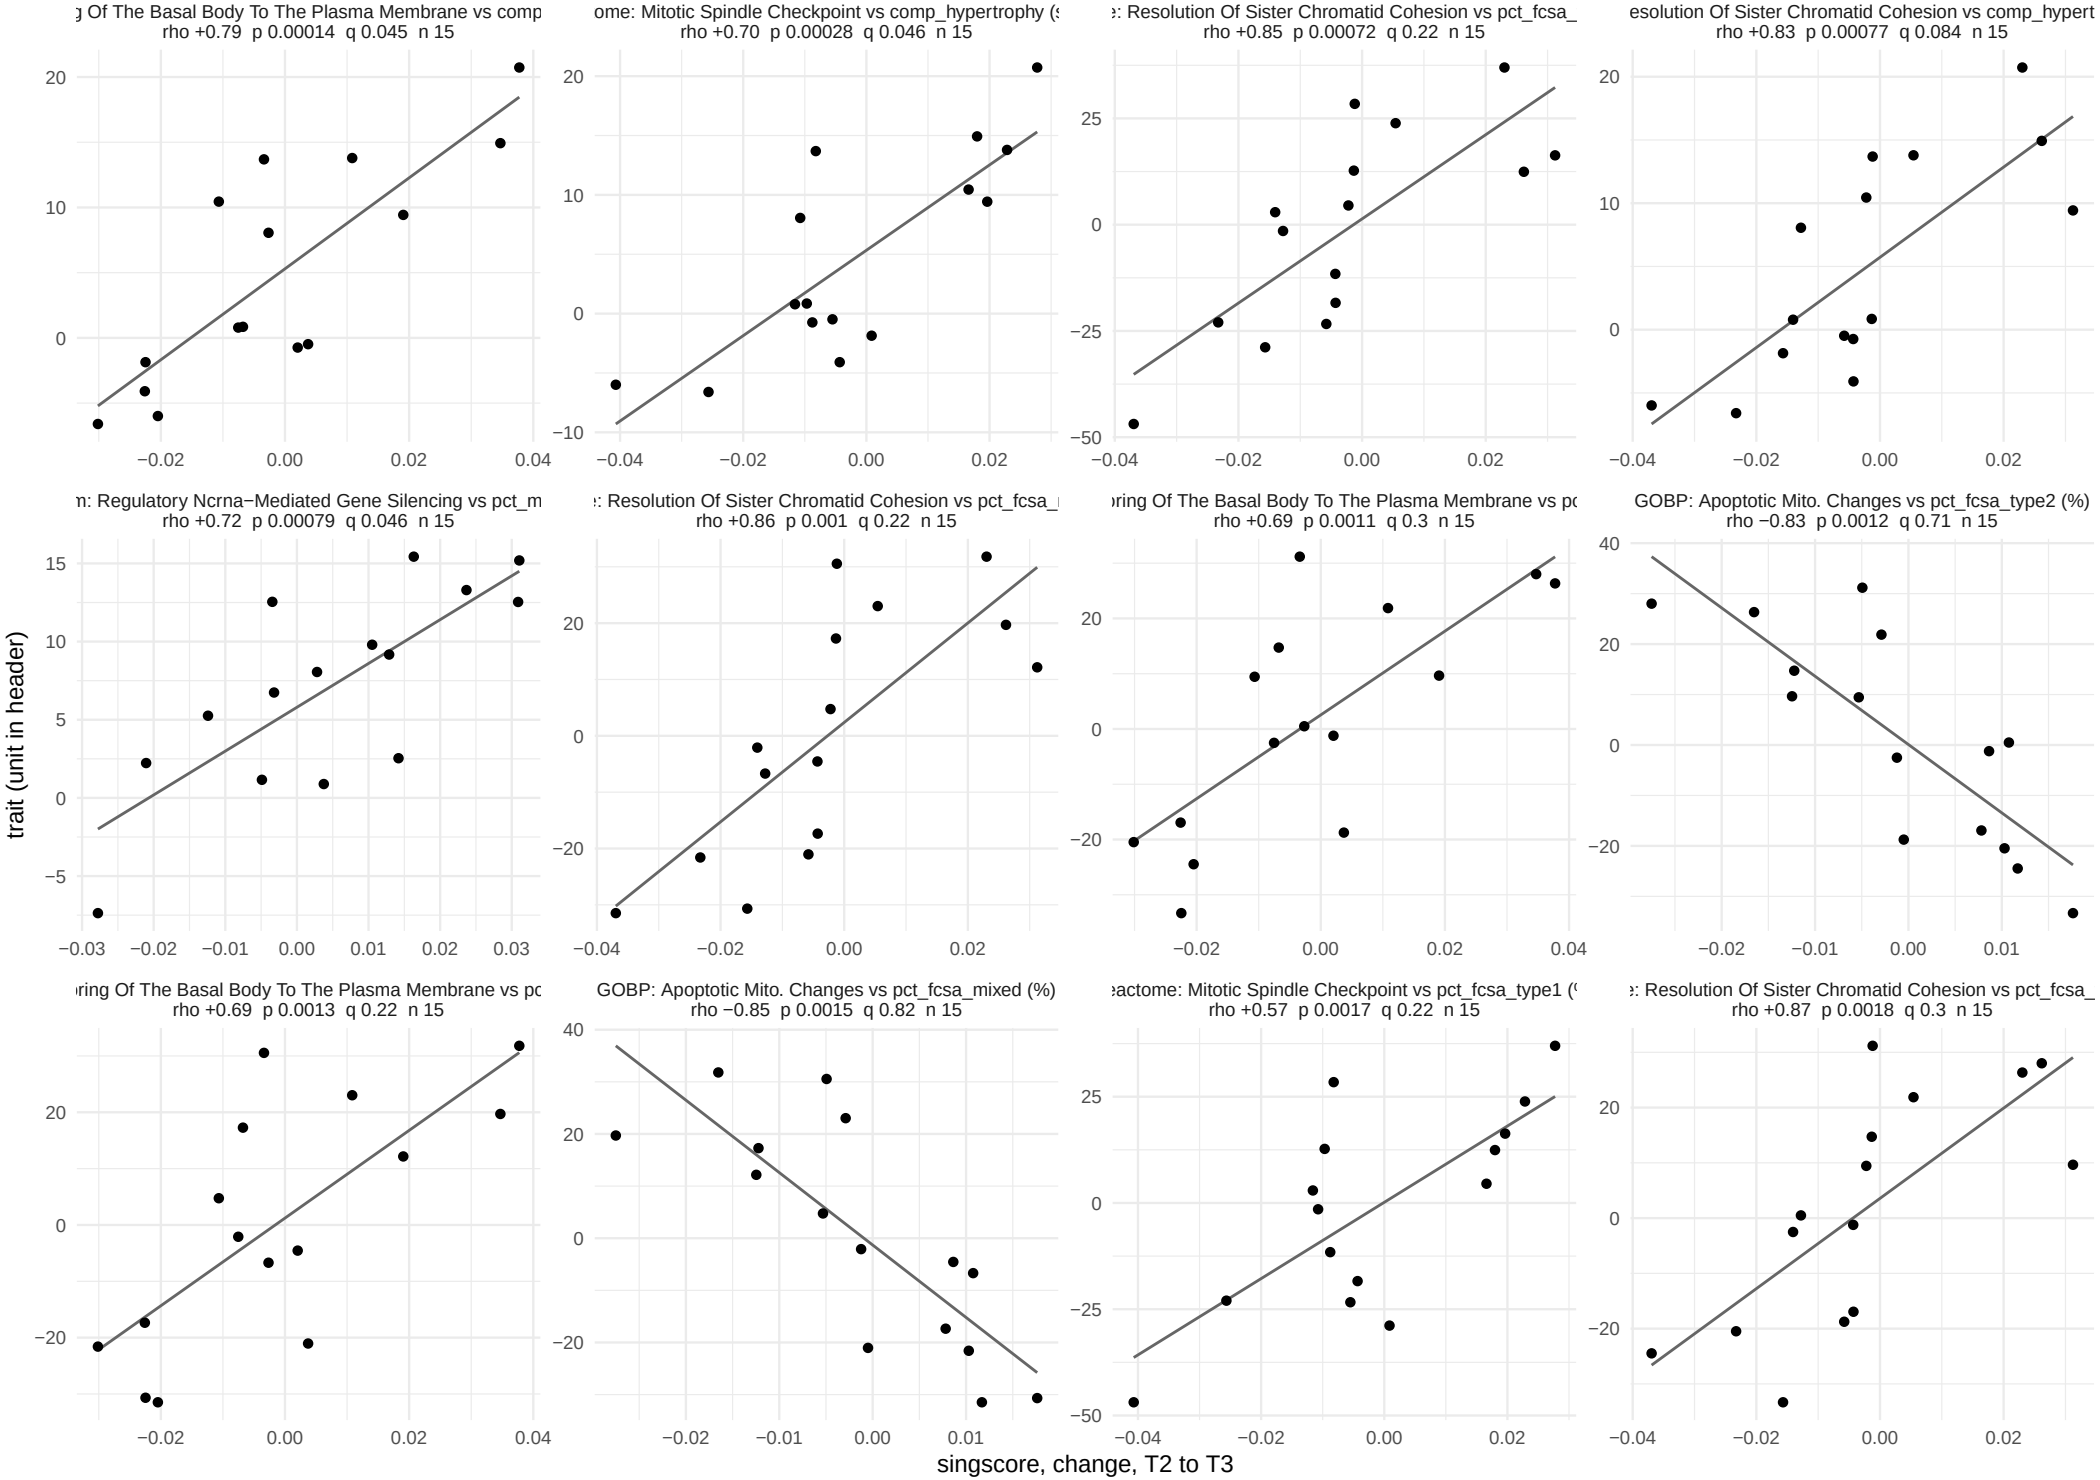

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, trait and collection, with the subjects used. Table: c_data/set_trait_associations.xlsx, change_score.

Change score, acute window


407 of 11024 feature−trait pairs at p < 0.05, 3 at BH < 0.05. Page 2 of 2.

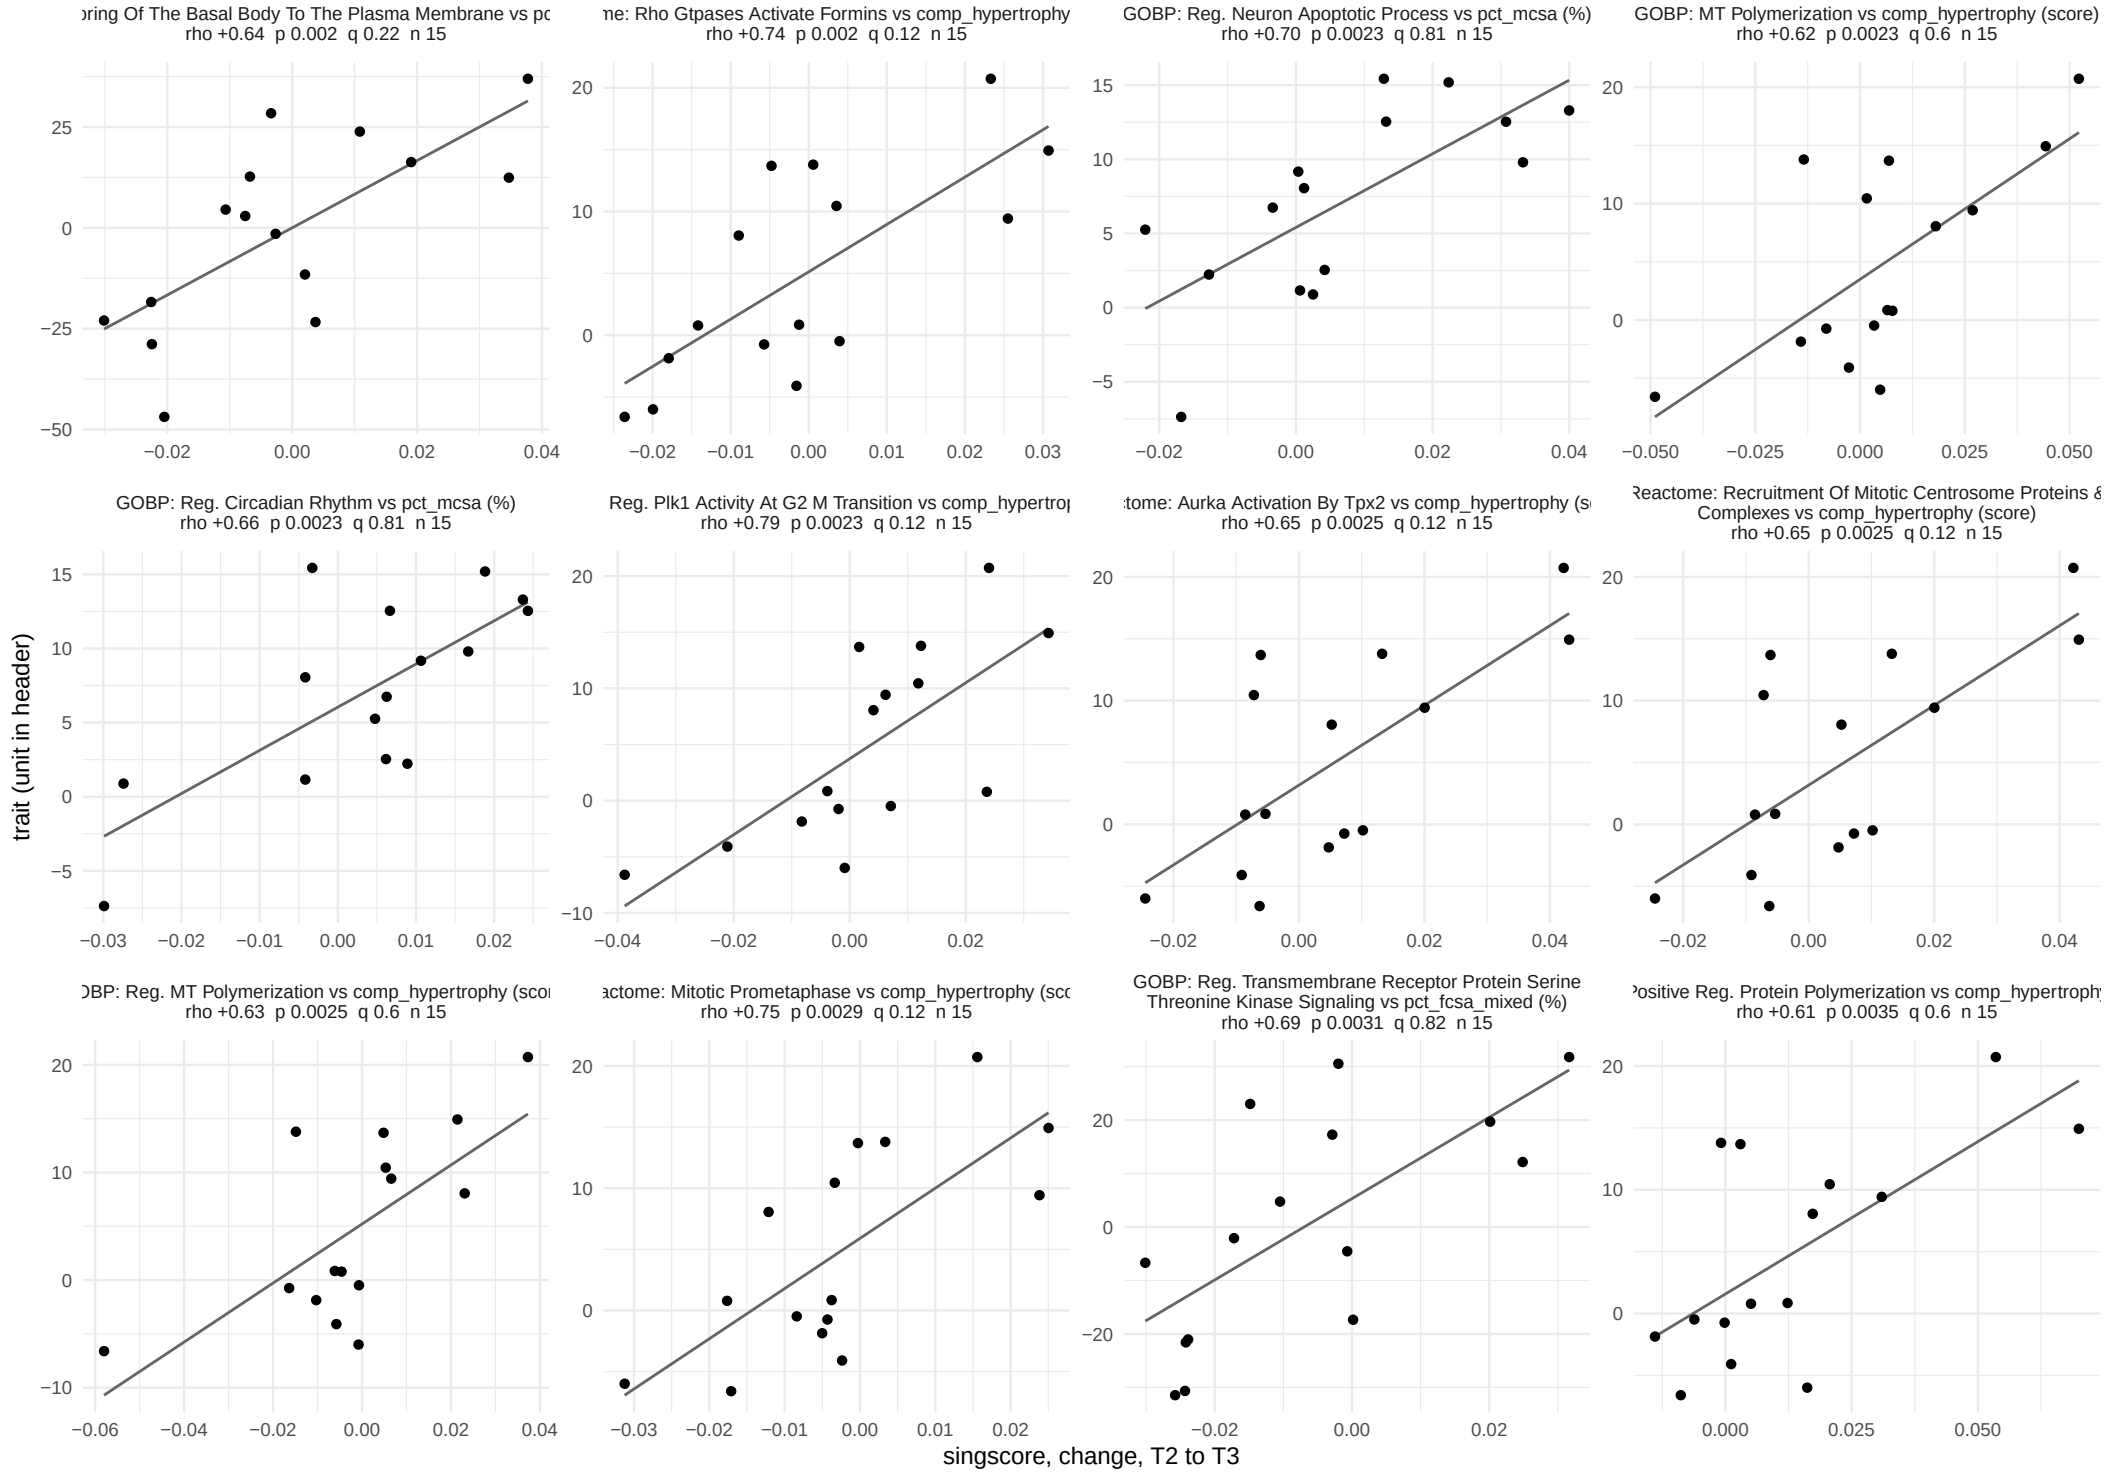

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, trait and collection, with the subjects used. Table: c_data/set_trait_associations.xlsx, change_score.

Change score, baseline_level window


673 of 8268 feature−trait pairs at p < 0.05, 0 at BH < 0.05. Page 1 of 2.

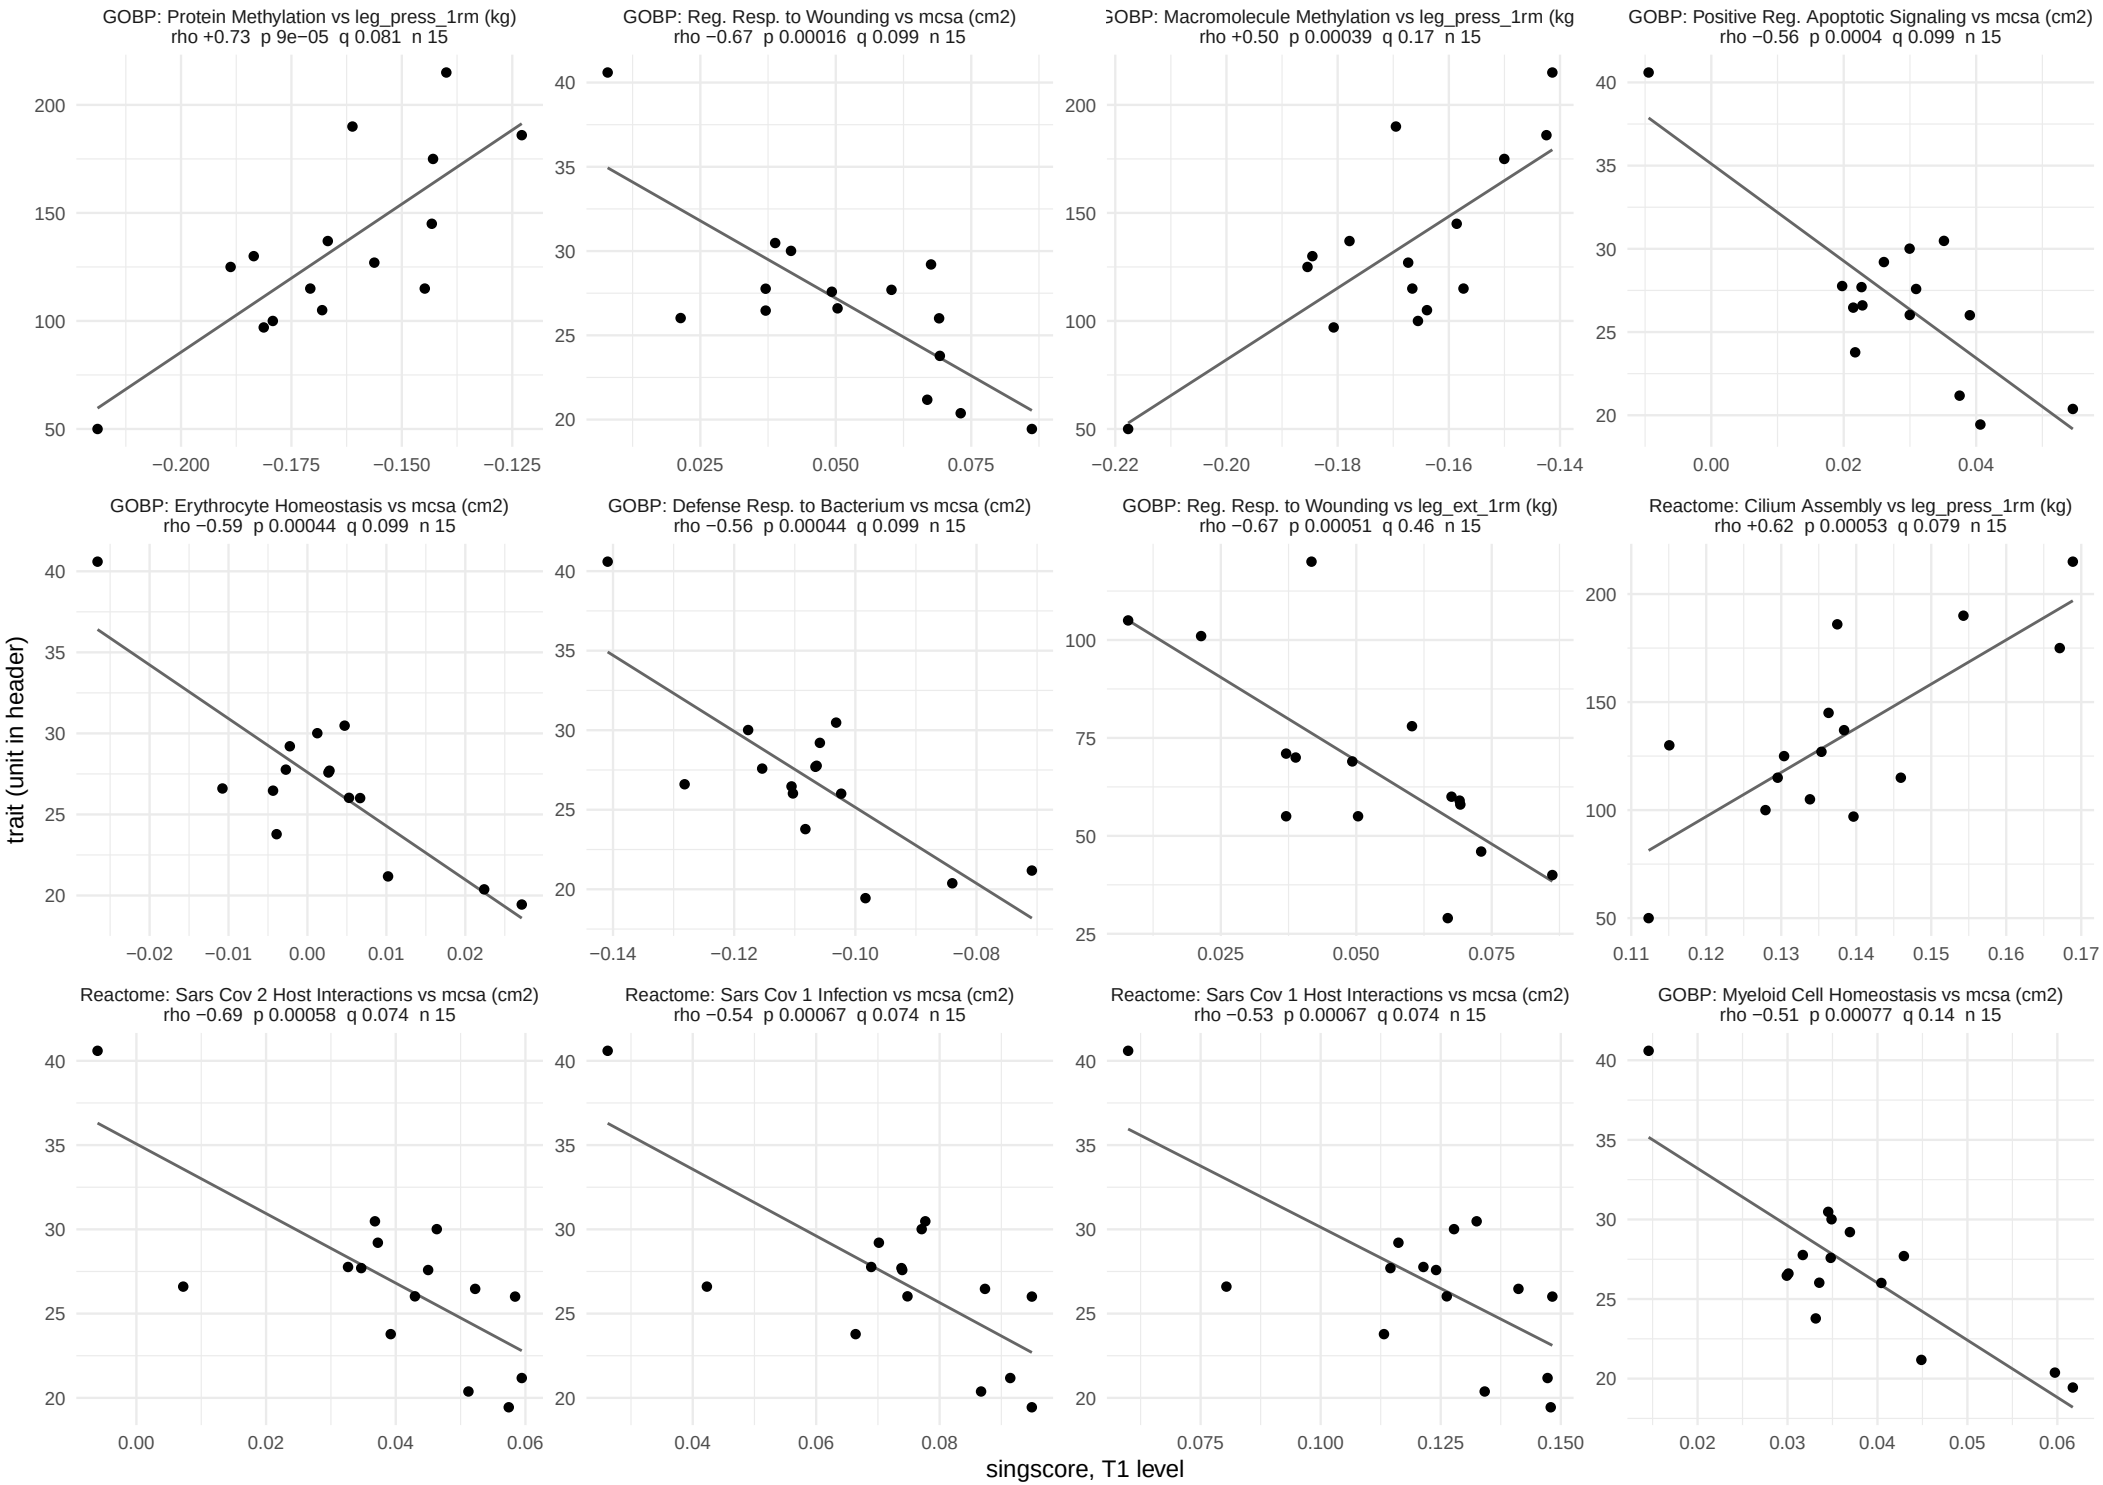

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, trait and collection, with the subjects used. Table: c_data/set_trait_associations.xlsx, change_score.

Change score, baseline_level window


673 of 8268 feature−trait pairs at p < 0.05, 0 at BH < 0.05. Page 2 of 2.

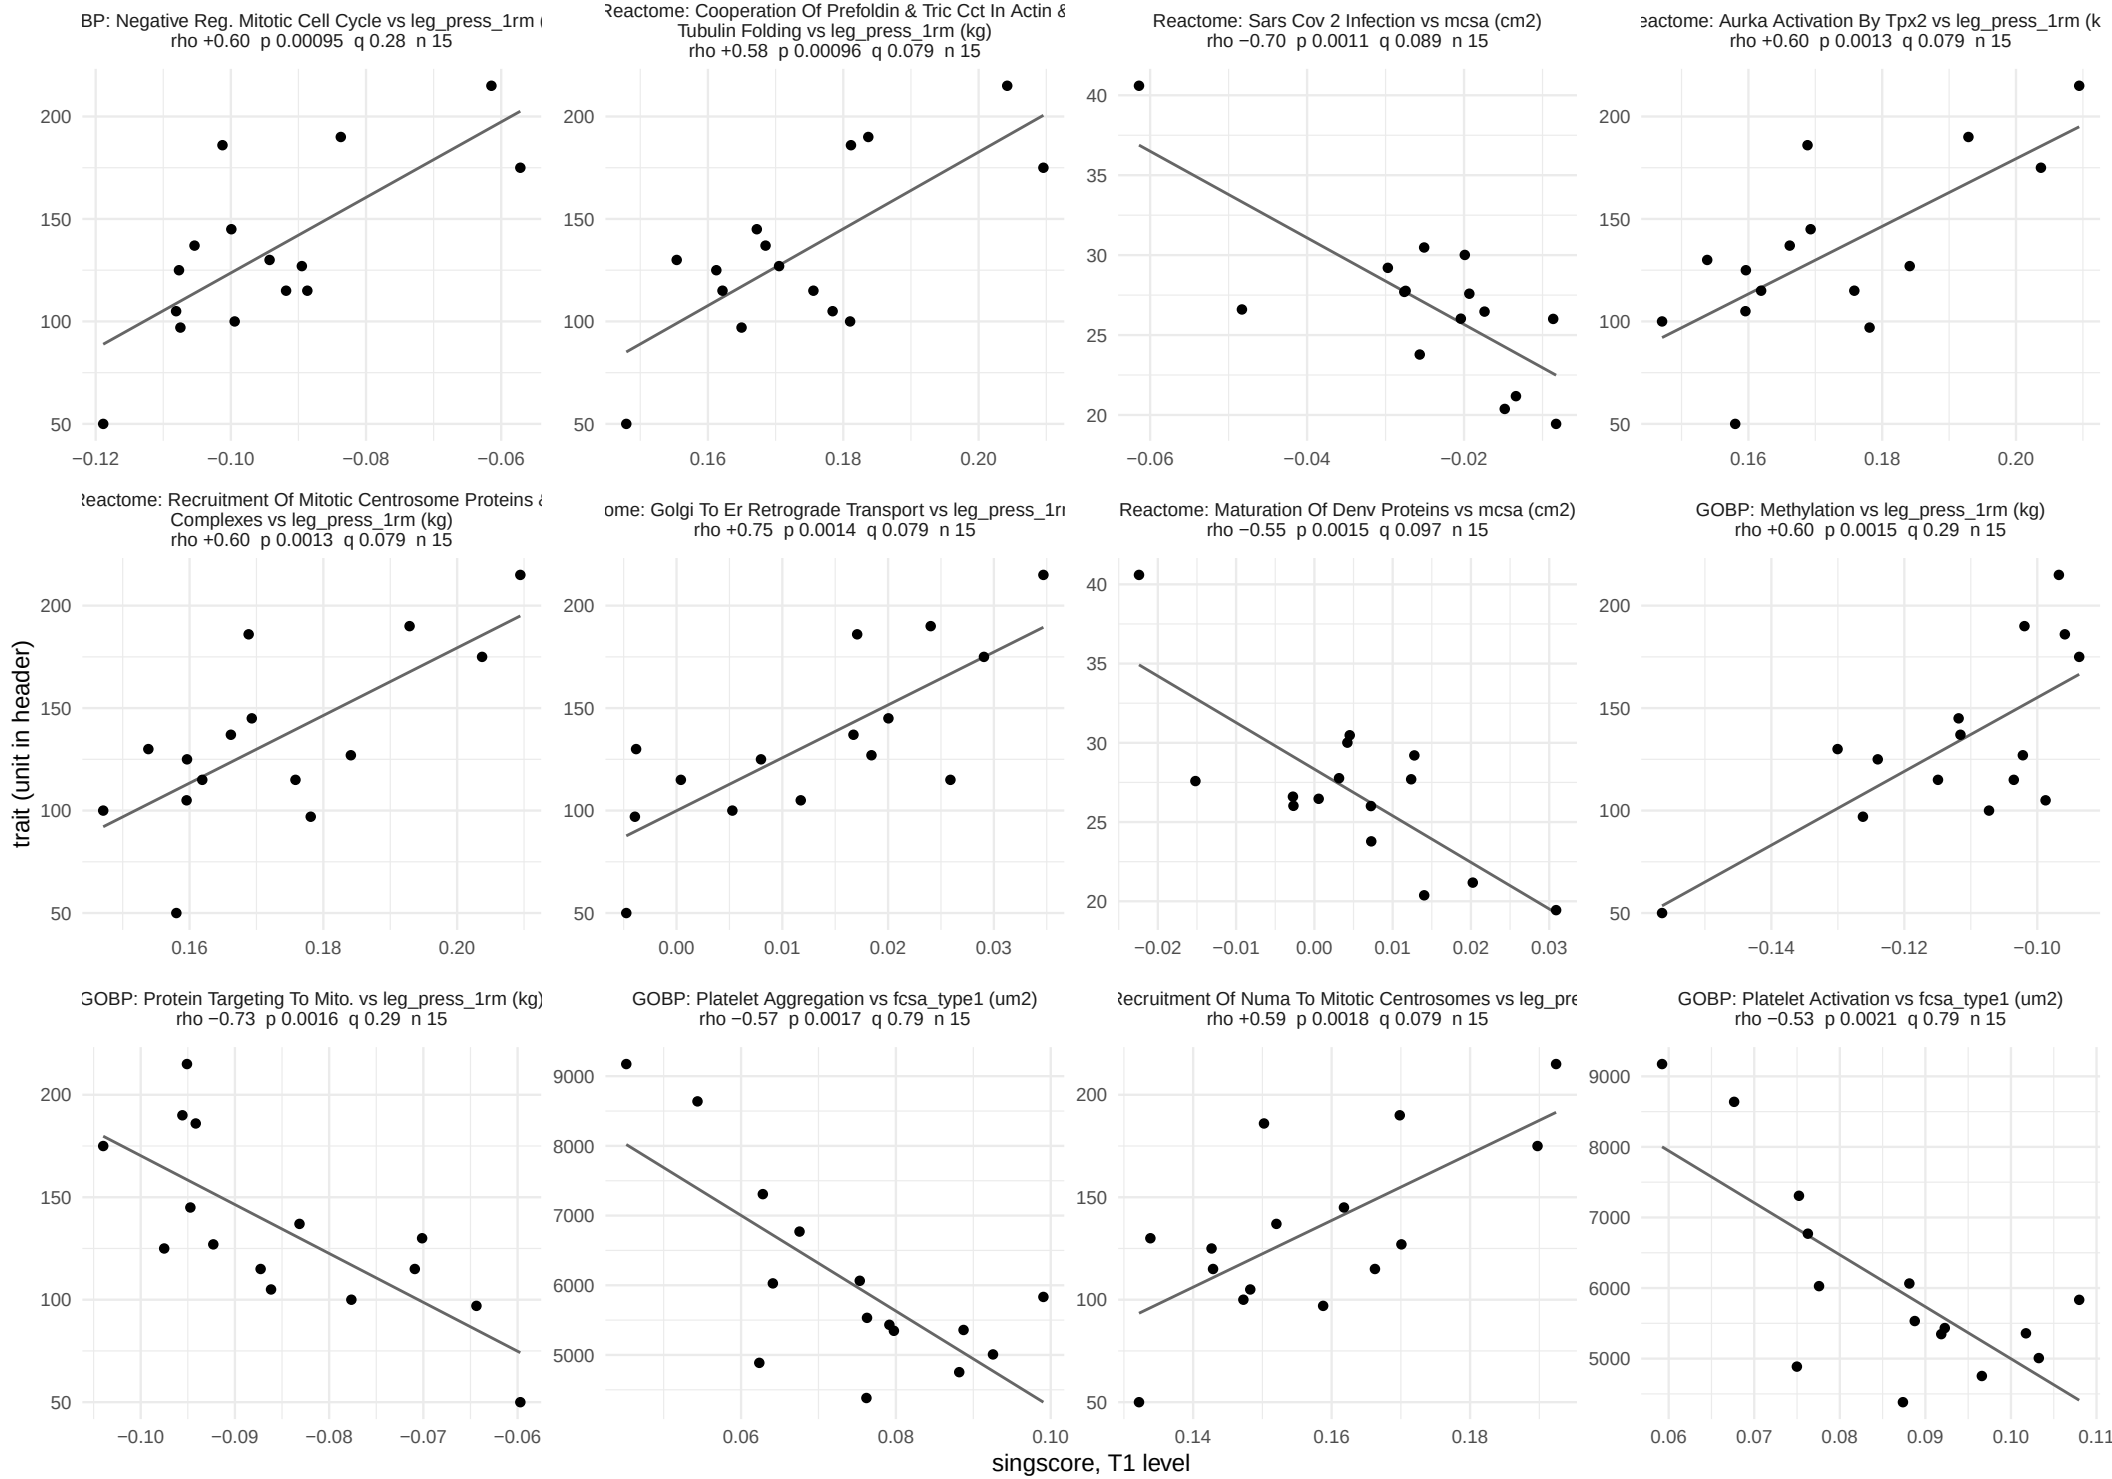

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, trait and collection, with the subjects used. Table: c_data/set_trait_associations.xlsx, change_score.

Change score, post_level window


380 of 8268 feature−trait pairs at p < 0.05, 5 at BH < 0.05. Page 1 of 2.

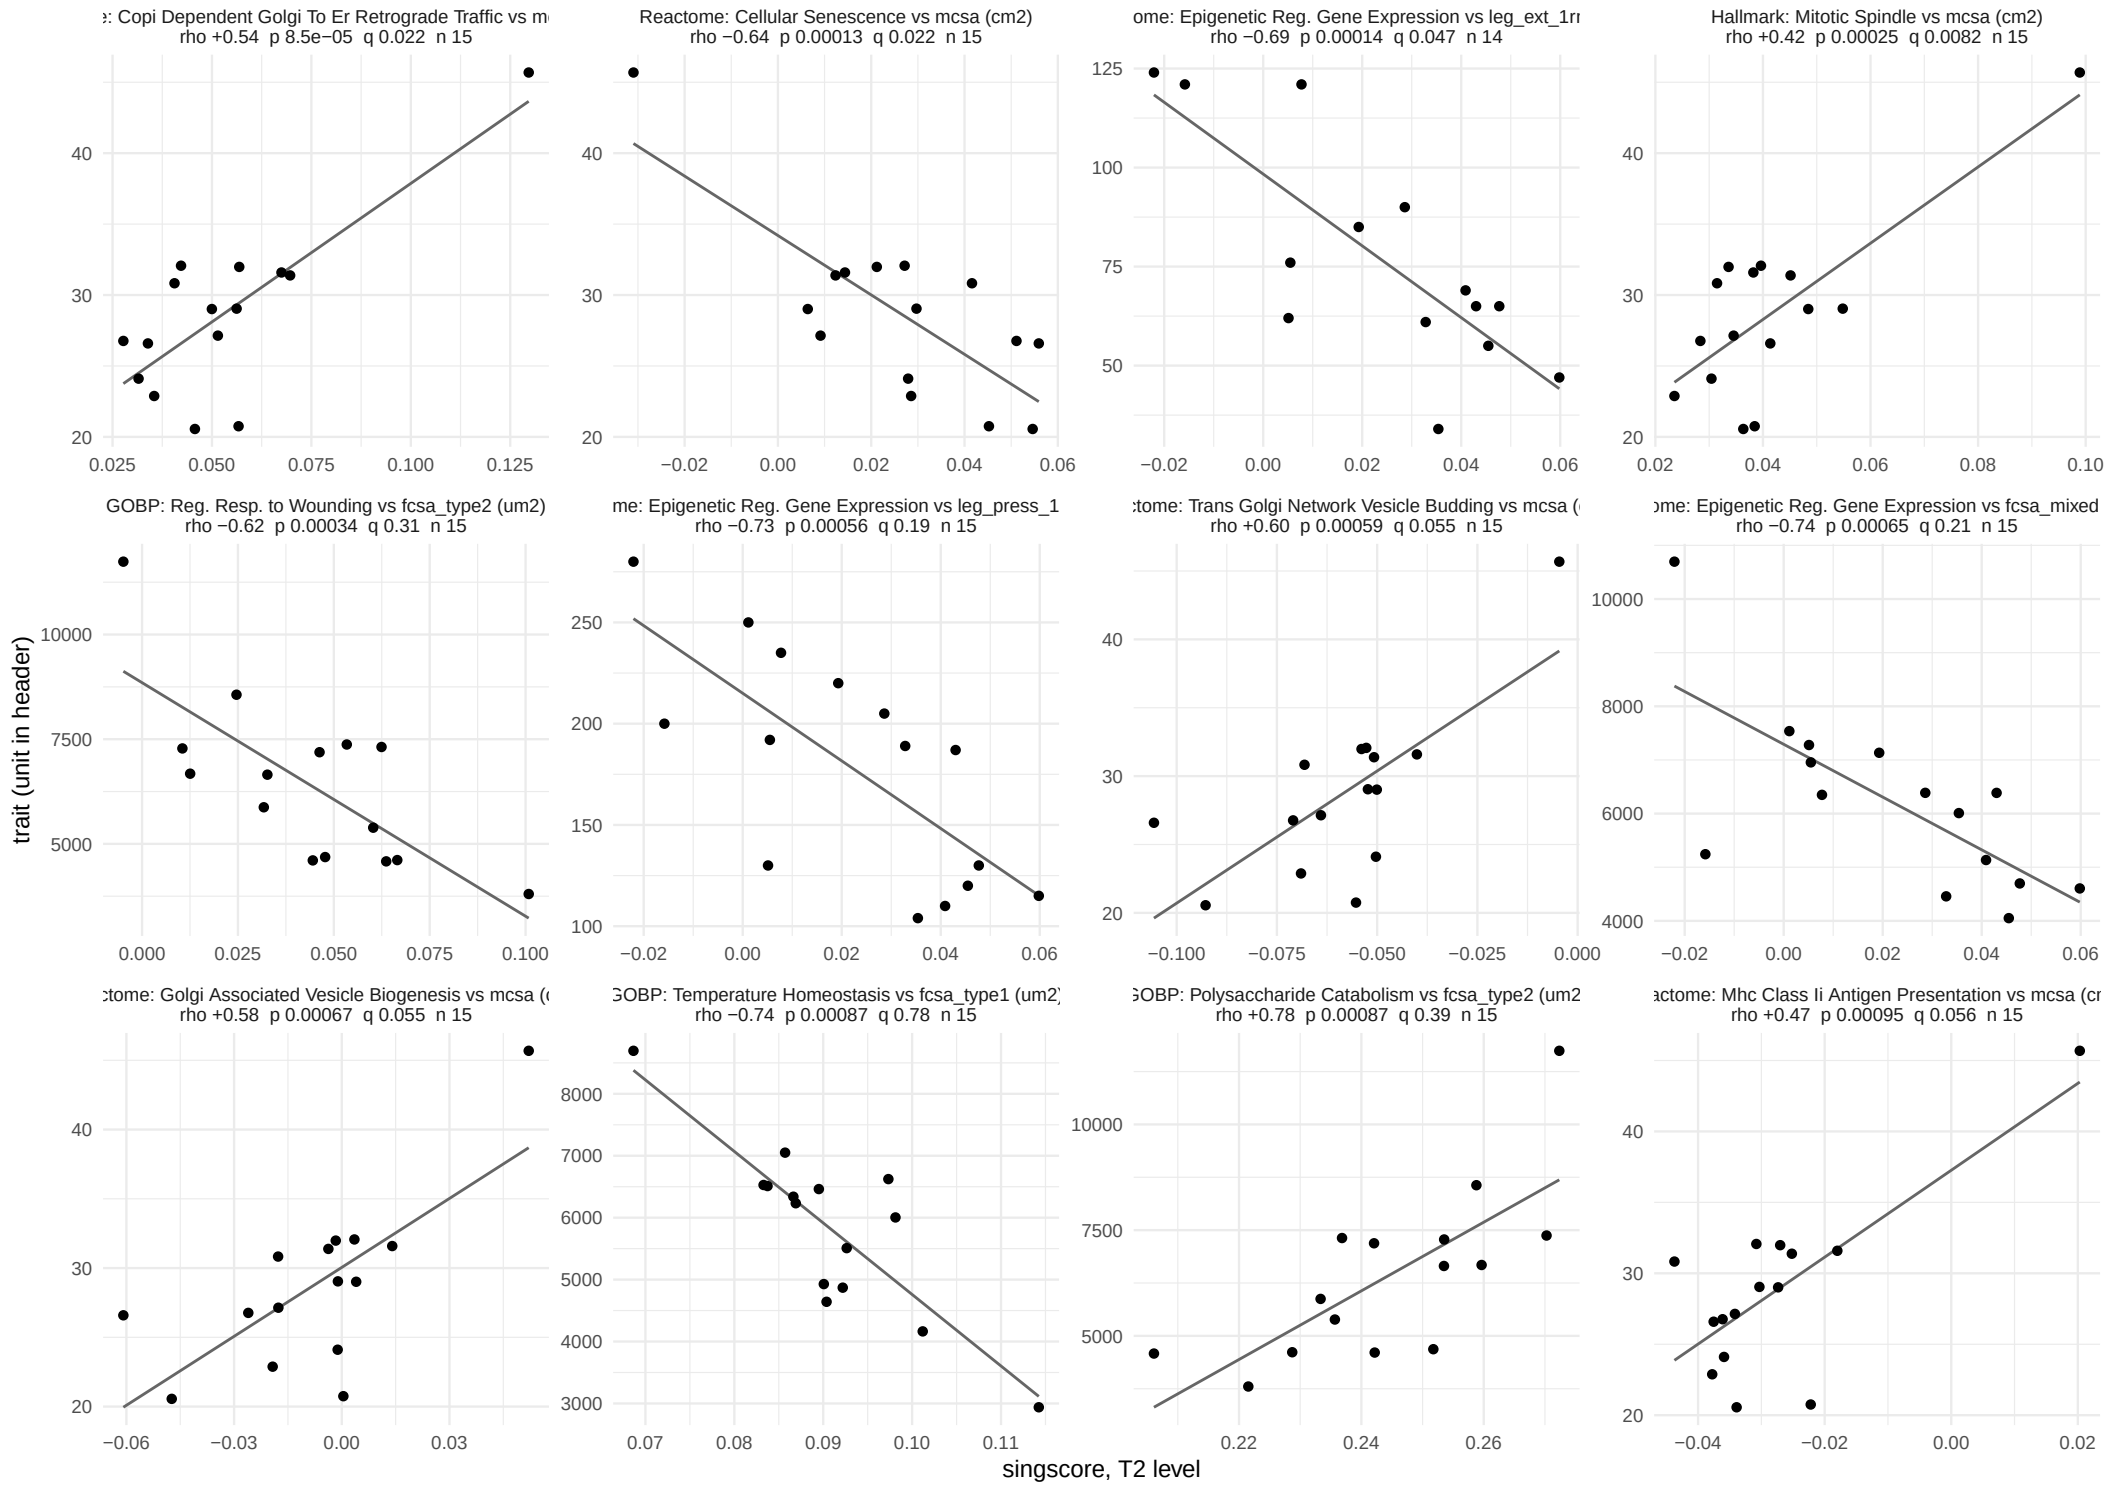

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, trait and collection, with the subjects used. Table: c_data/set_trait_associations.xlsx, change_score.

Change score, post_level window


380 of 8268 feature−trait pairs at p < 0.05, 5 at BH < 0.05. Page 2 of 2.

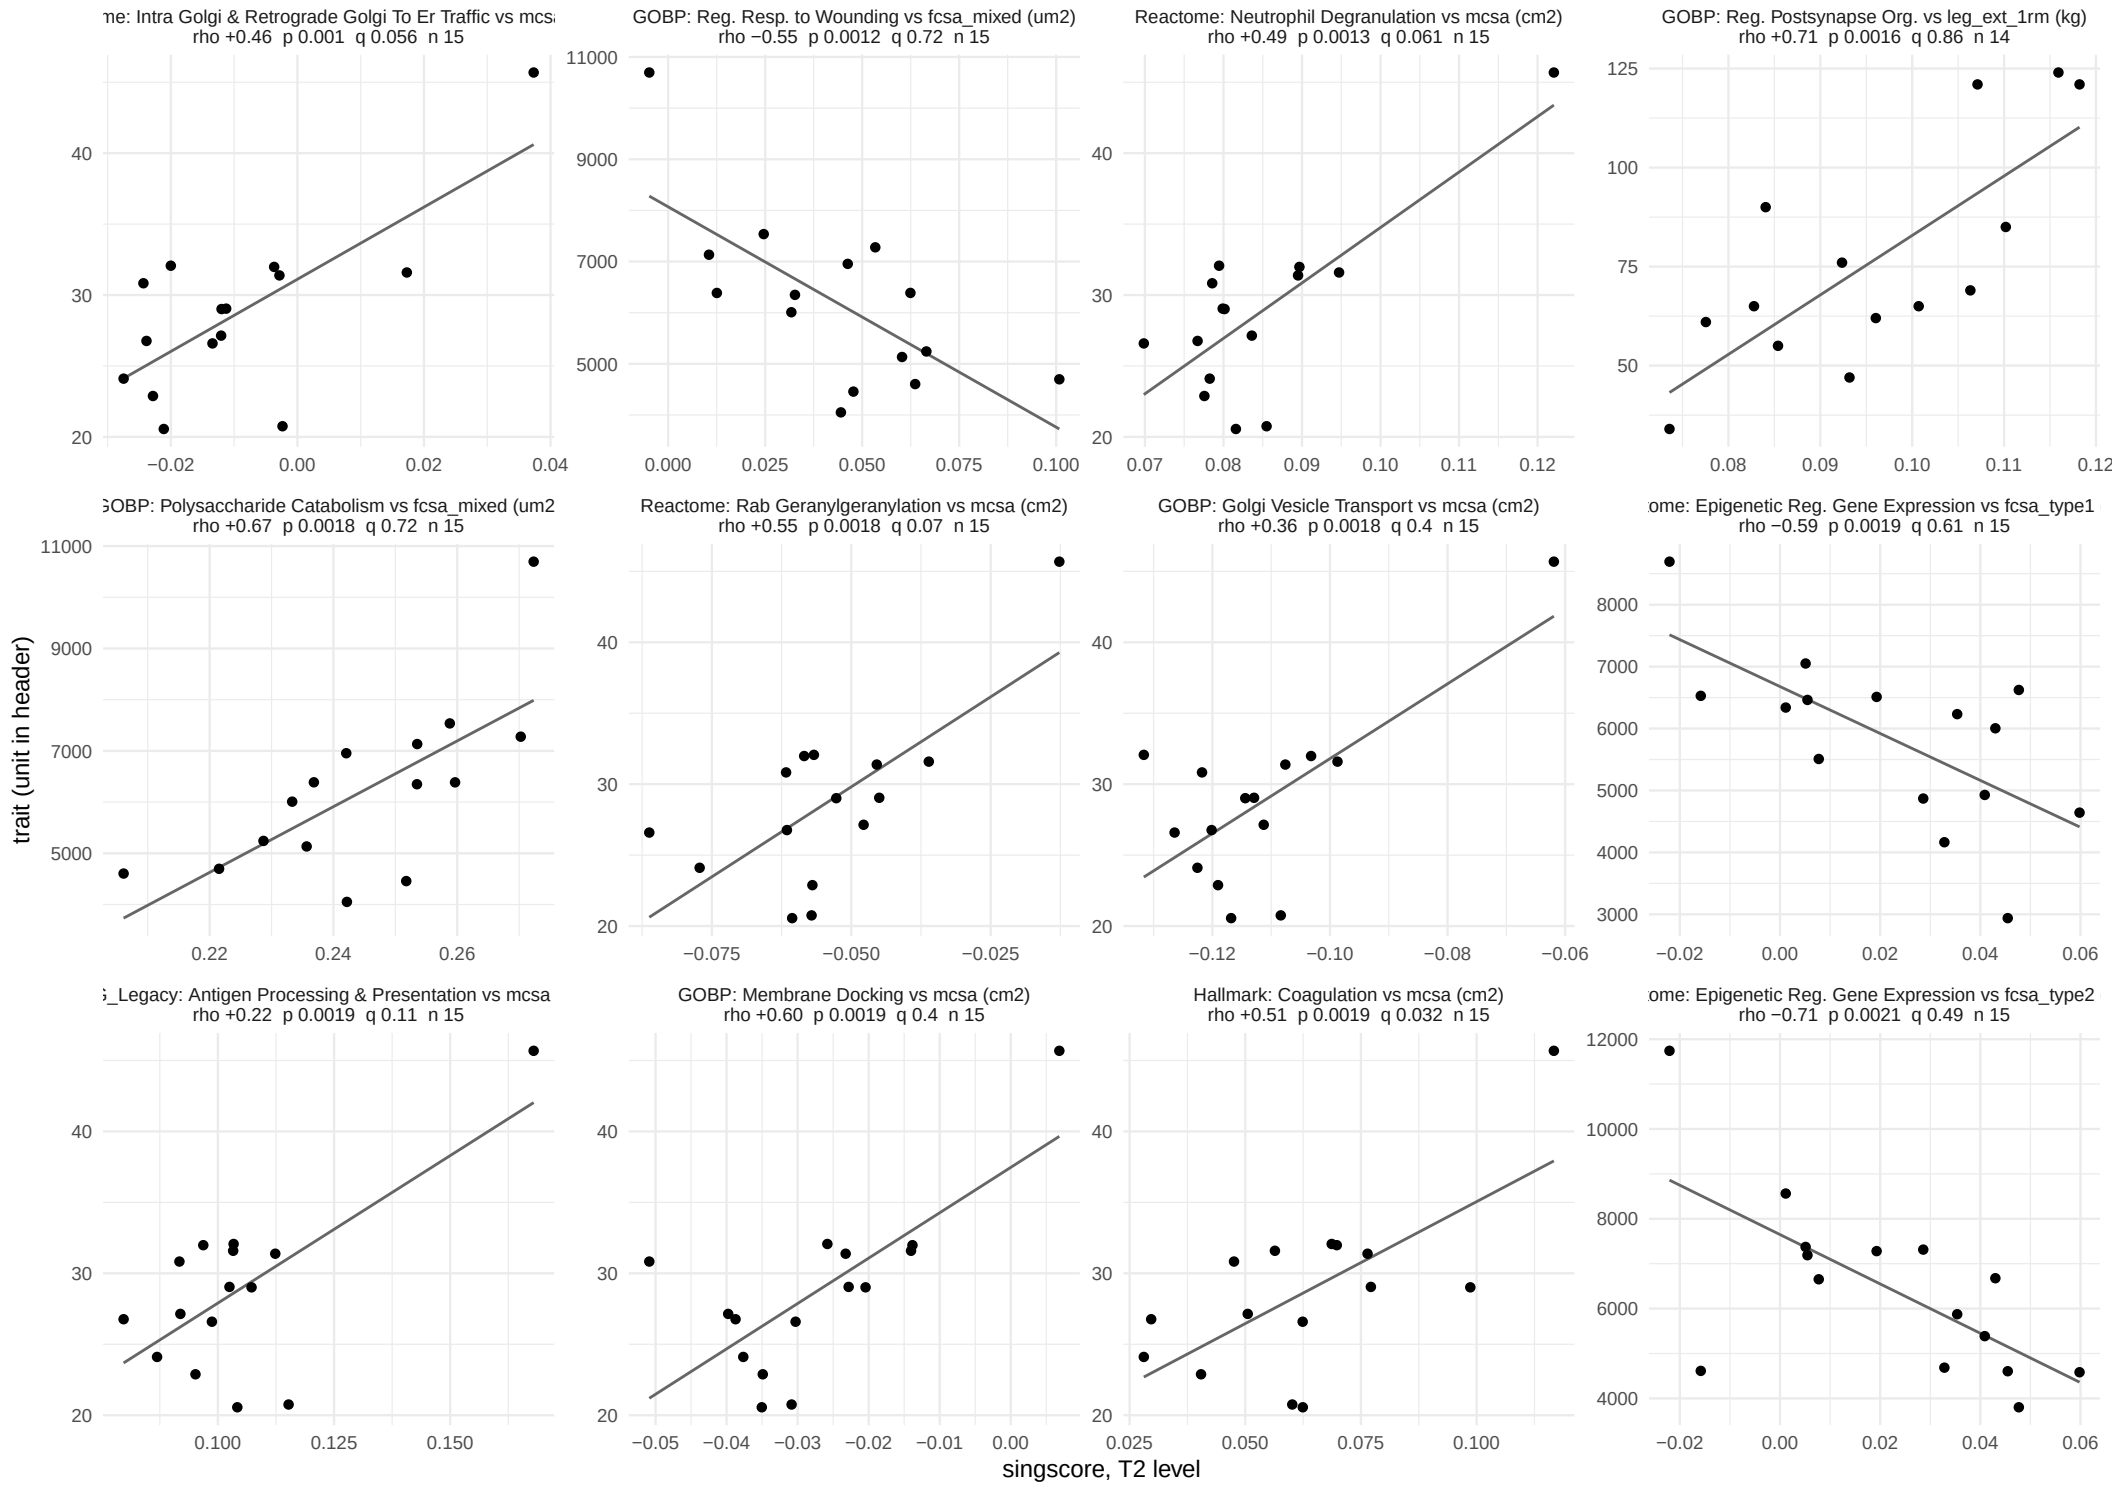

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, trait and collection, with the subjects used. Table: c_data/set_trait_associations.xlsx, change_score.

Change score, post_bout_level window


249 of 8268 feature−trait pairs at p < 0.05, 0 at BH < 0.05. Page 1 of 2.

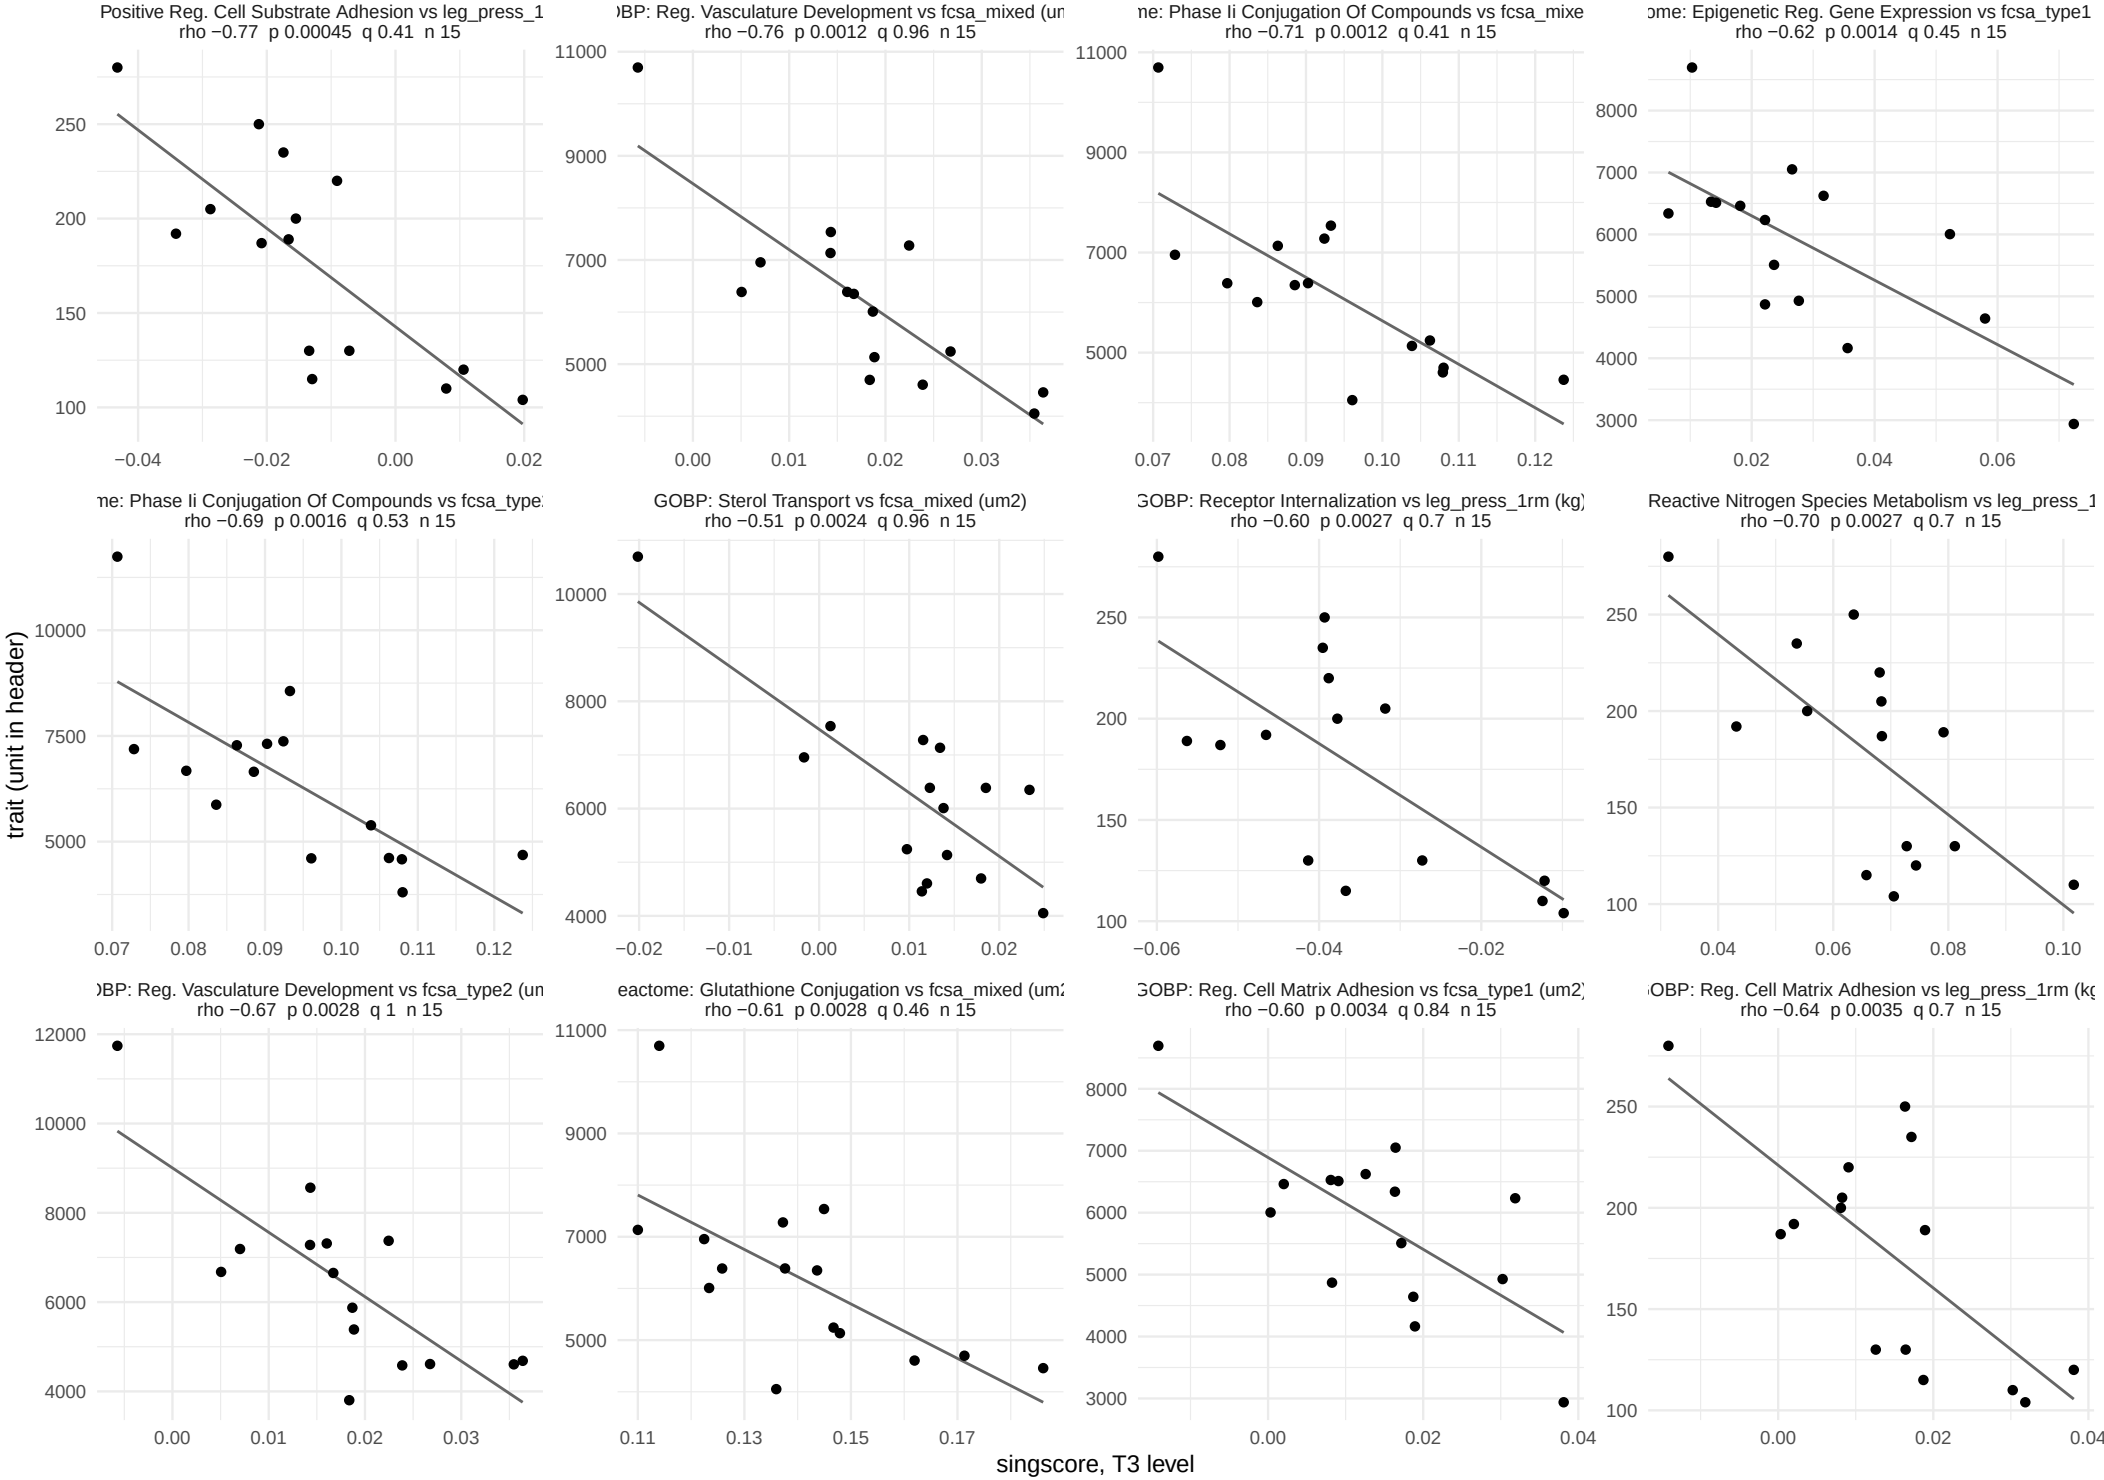

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, trait and collection, with the subjects used. Table: c_data/set_trait_associations.xlsx, change_score.

Change score, post_bout_level window


249 of 8268 feature−trait pairs at p < 0.05, 0 at BH < 0.05. Page 2 of 2.

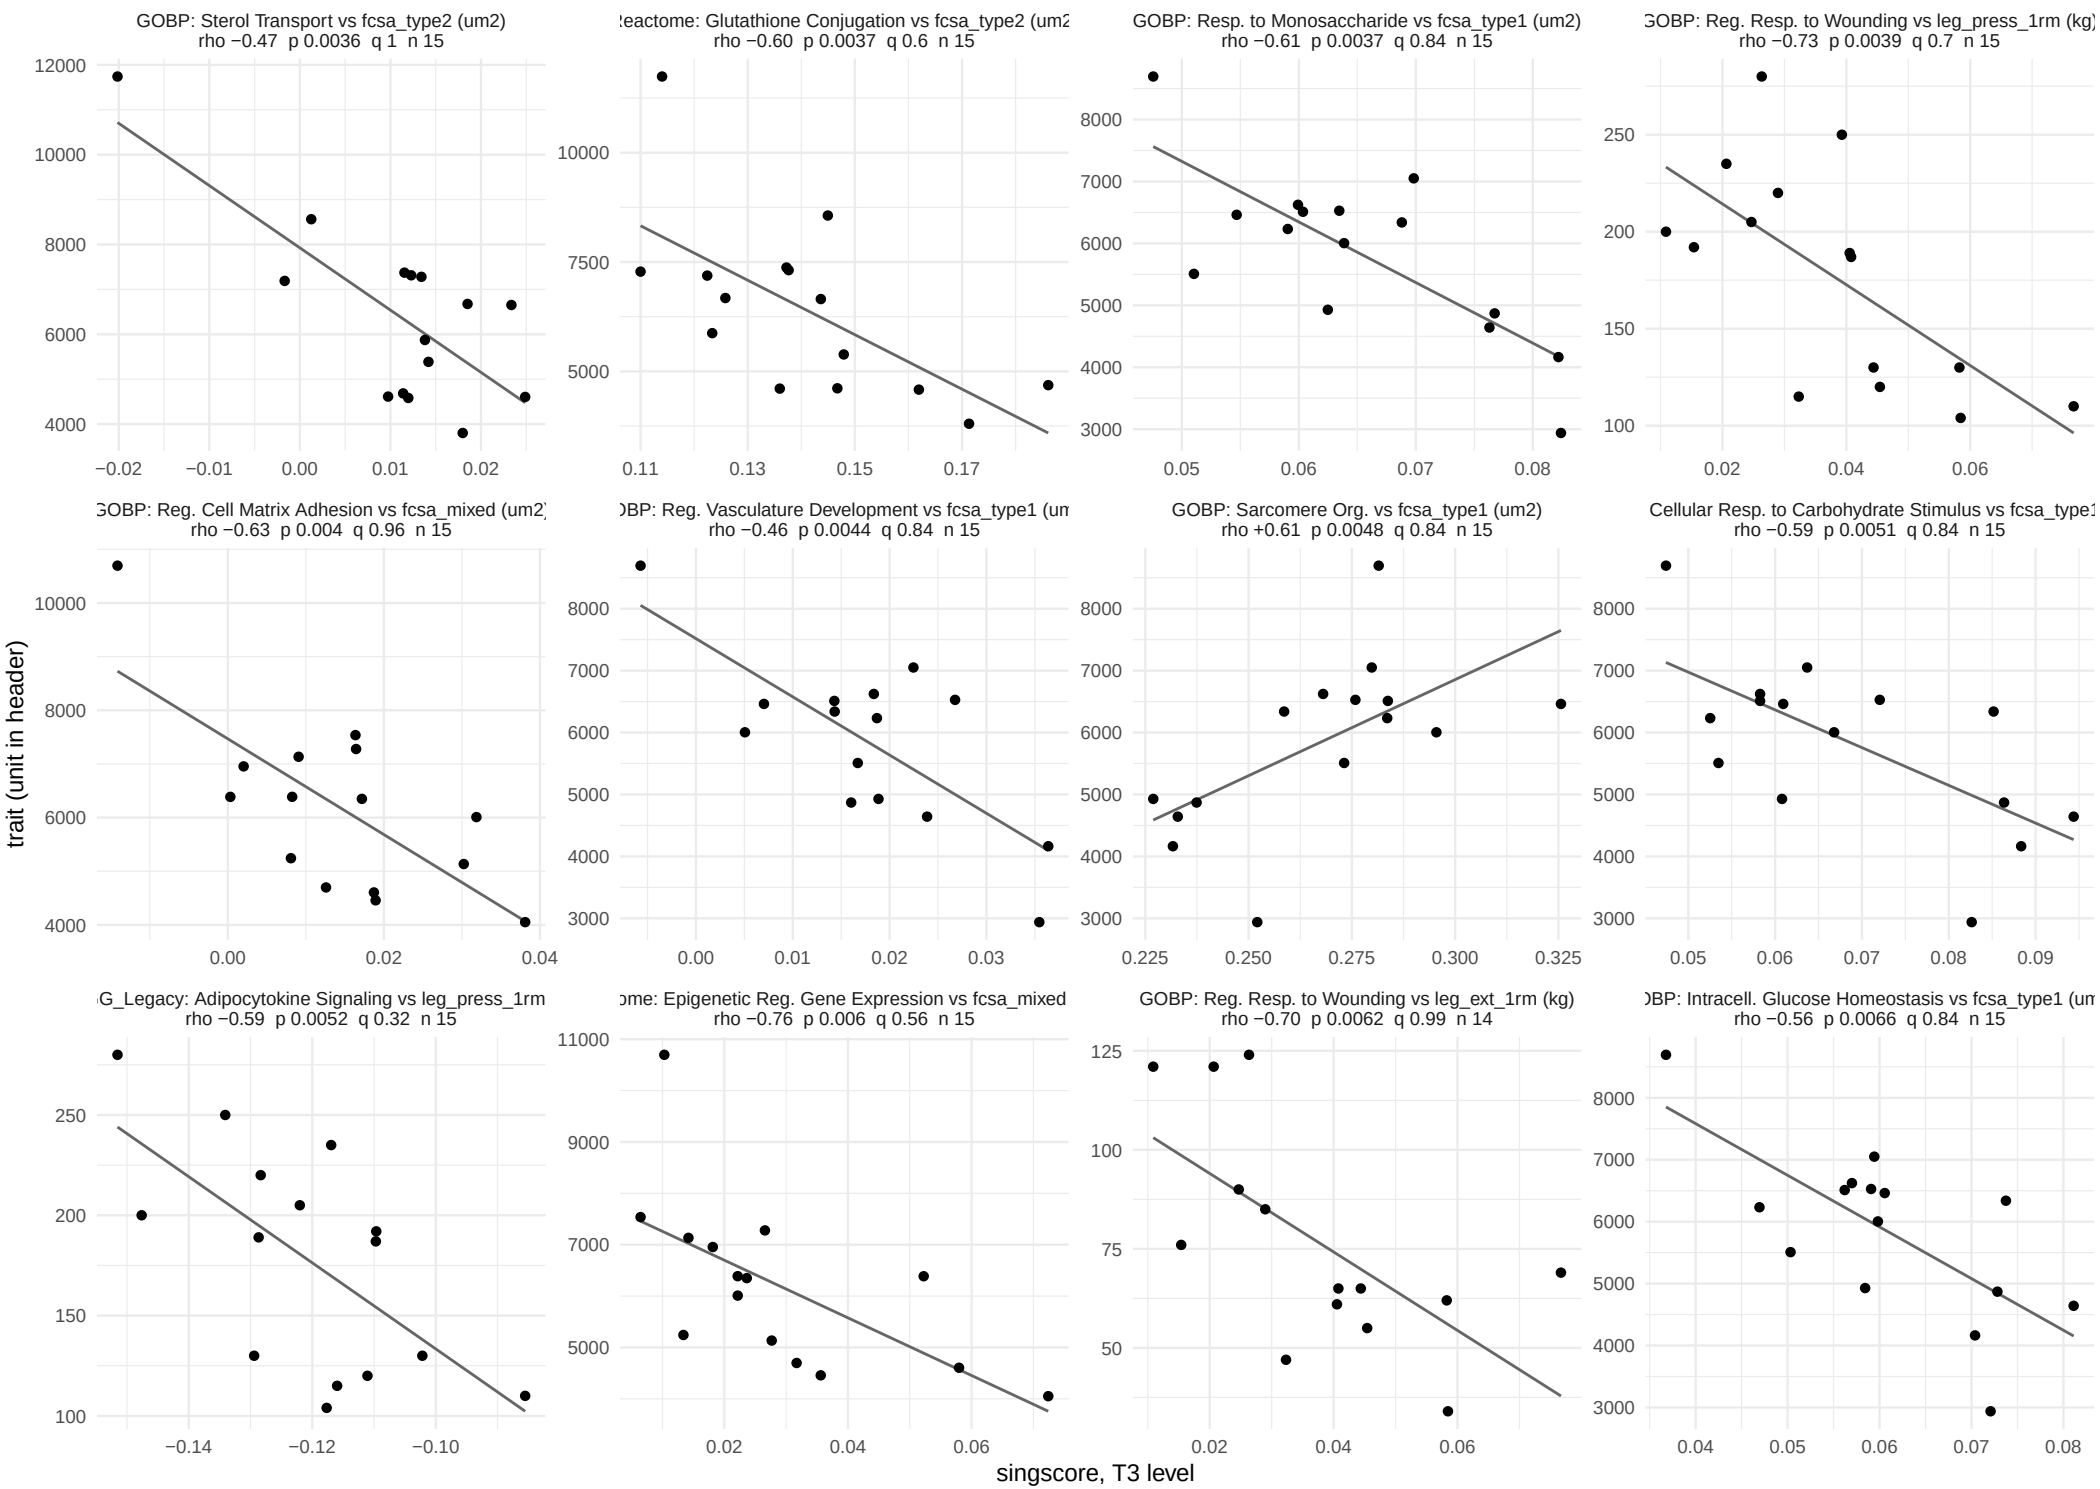

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, trait and collection, with the subjects used. Table: c_data/set_trait_associations.xlsx, change_score.

Two predictor, training window


149 of 5512 feature−trait pairs at p < 0.05, 0 at BH < 0.05. Page 1 of 2.

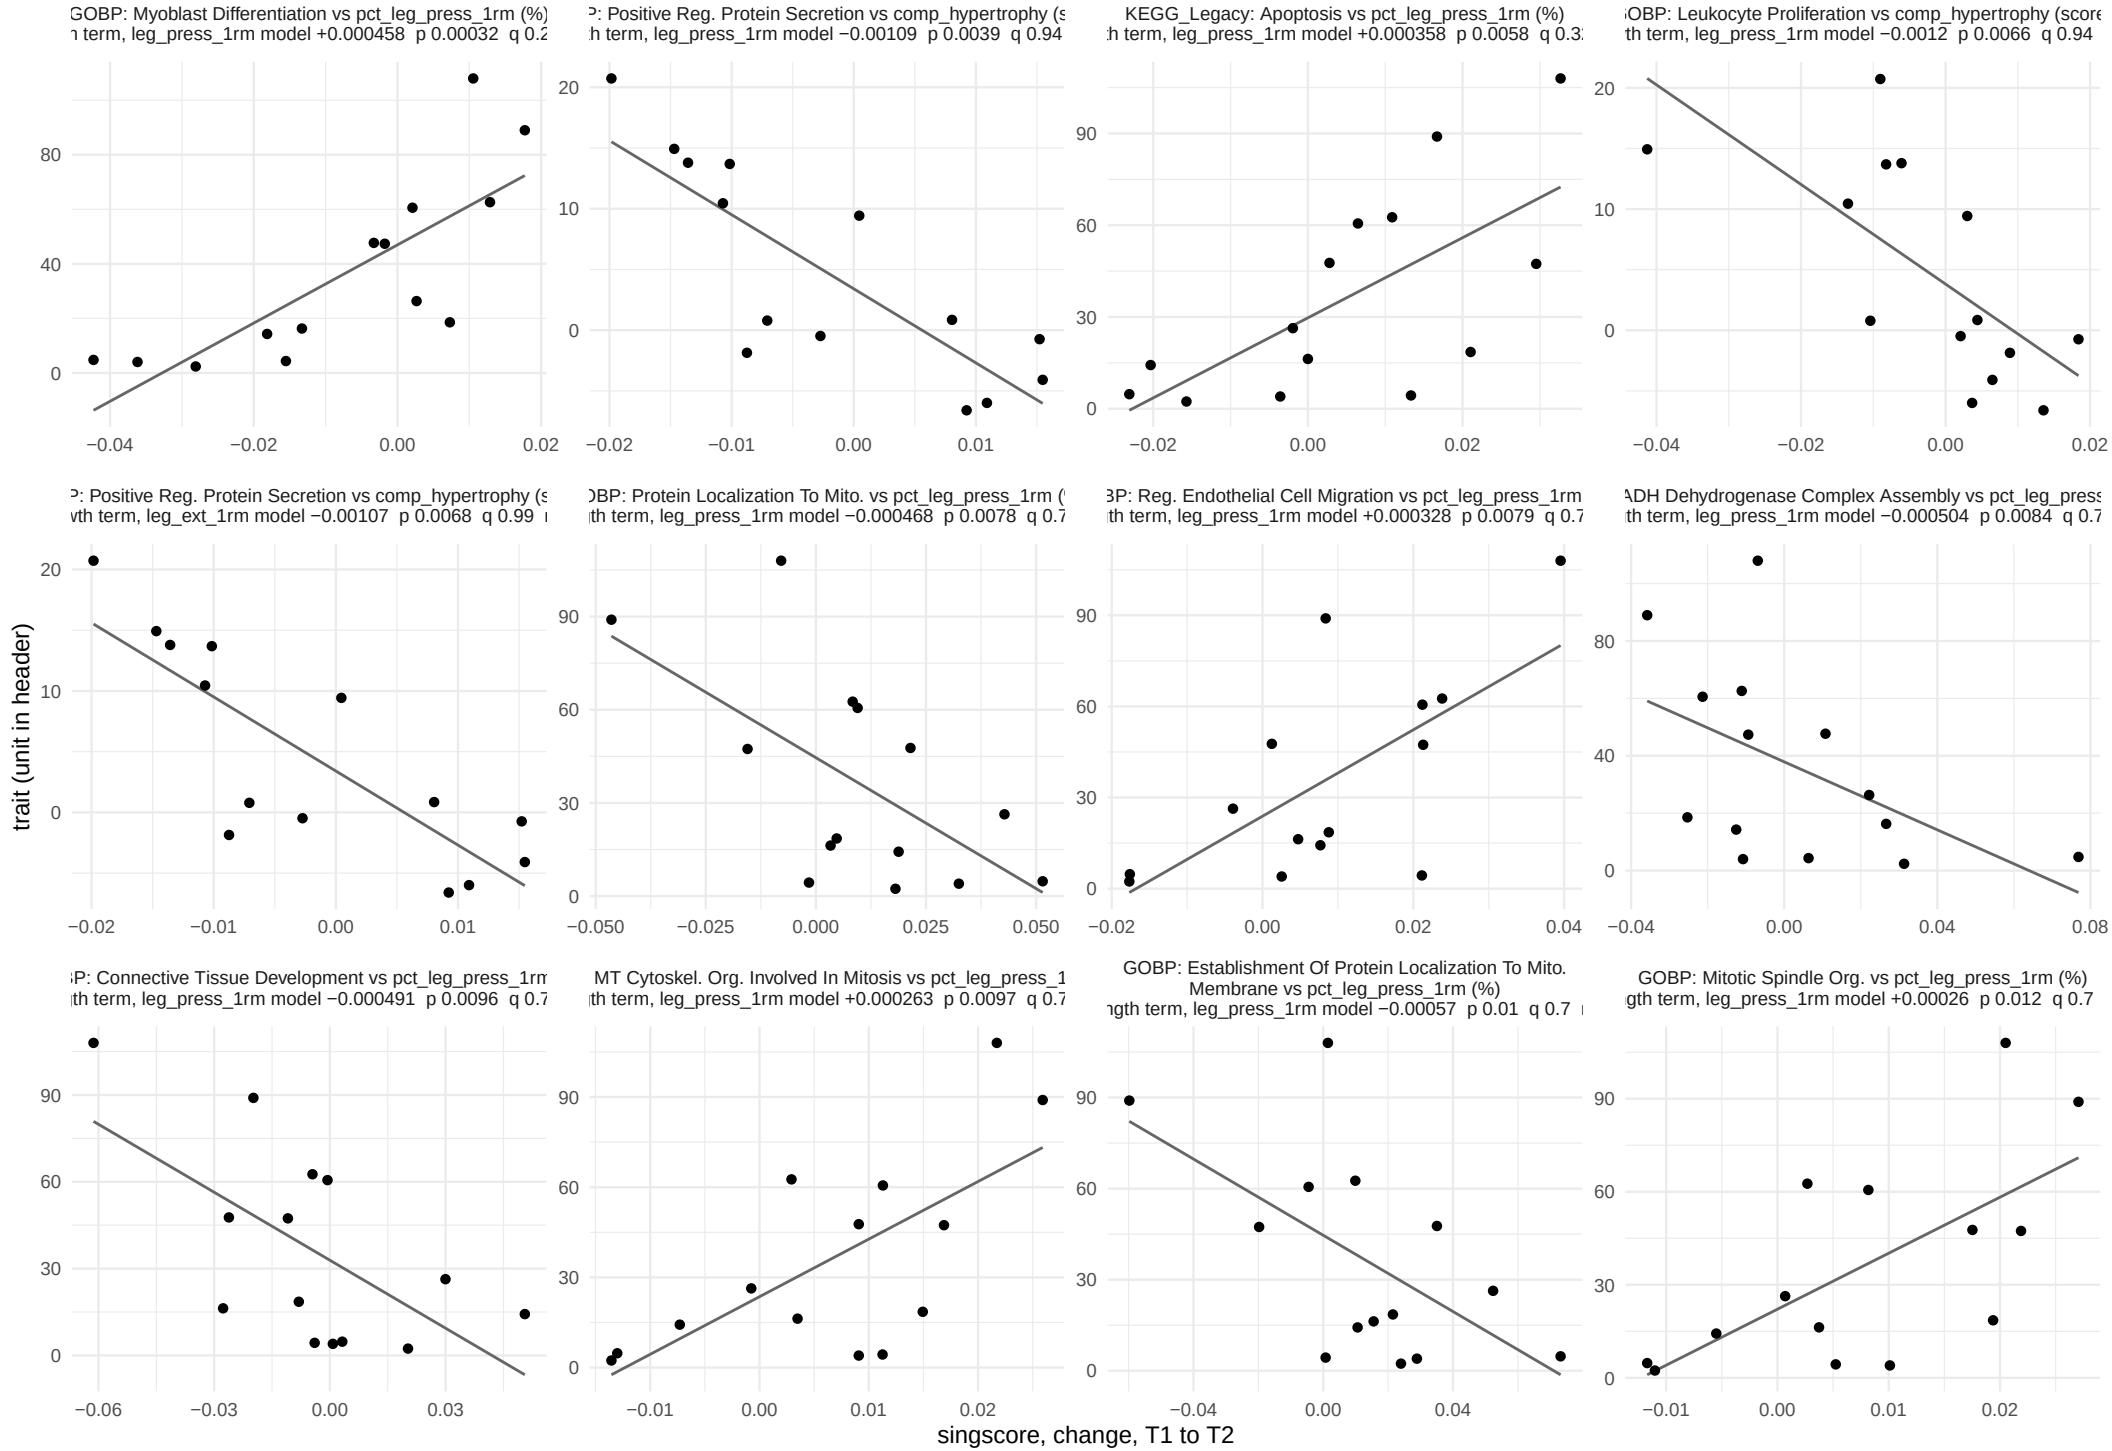

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own trait; the drawing does not hold the other predictor fixed. Table: c_data/set_trait_associations.xlsx, two_predictor.

Two predictor, training window


149 of 5512 feature−trait pairs at p < 0.05, 0 at BH < 0.05. Page 2 of 2.

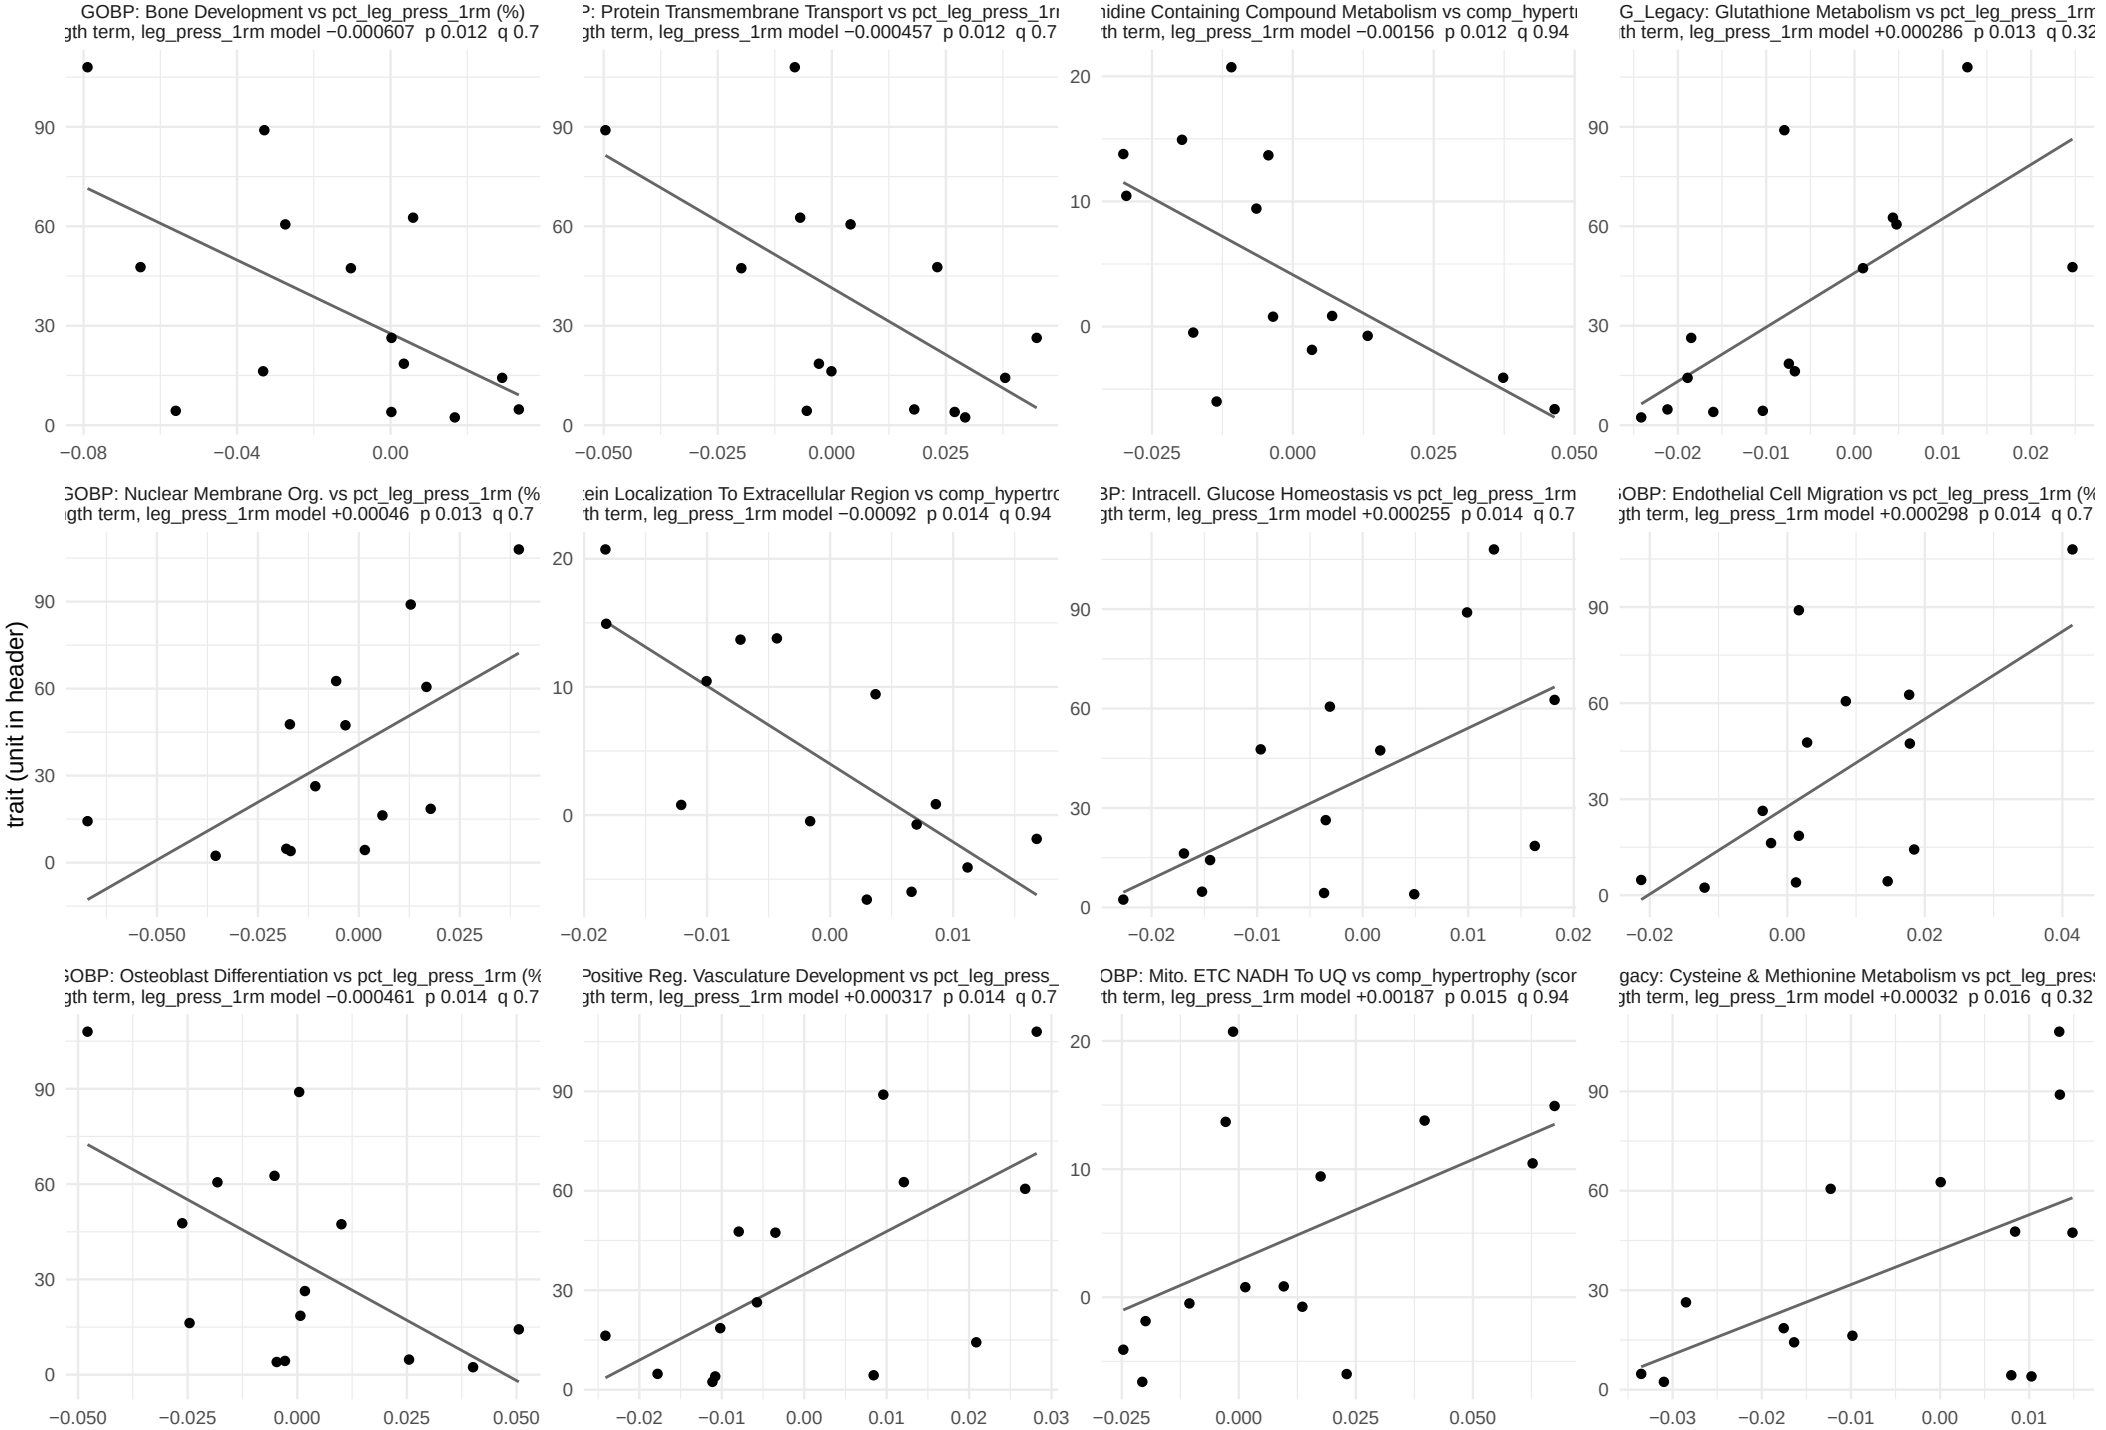

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own trait; the drawing does not hold the other predictor fixed. Table: c_data/set_trait_associations.xlsx, two_predictor.

Two predictor, baseline window


334 of 5512 feature−trait pairs at p < 0.05, 7 at BH < 0.05. Page 1 of 2.

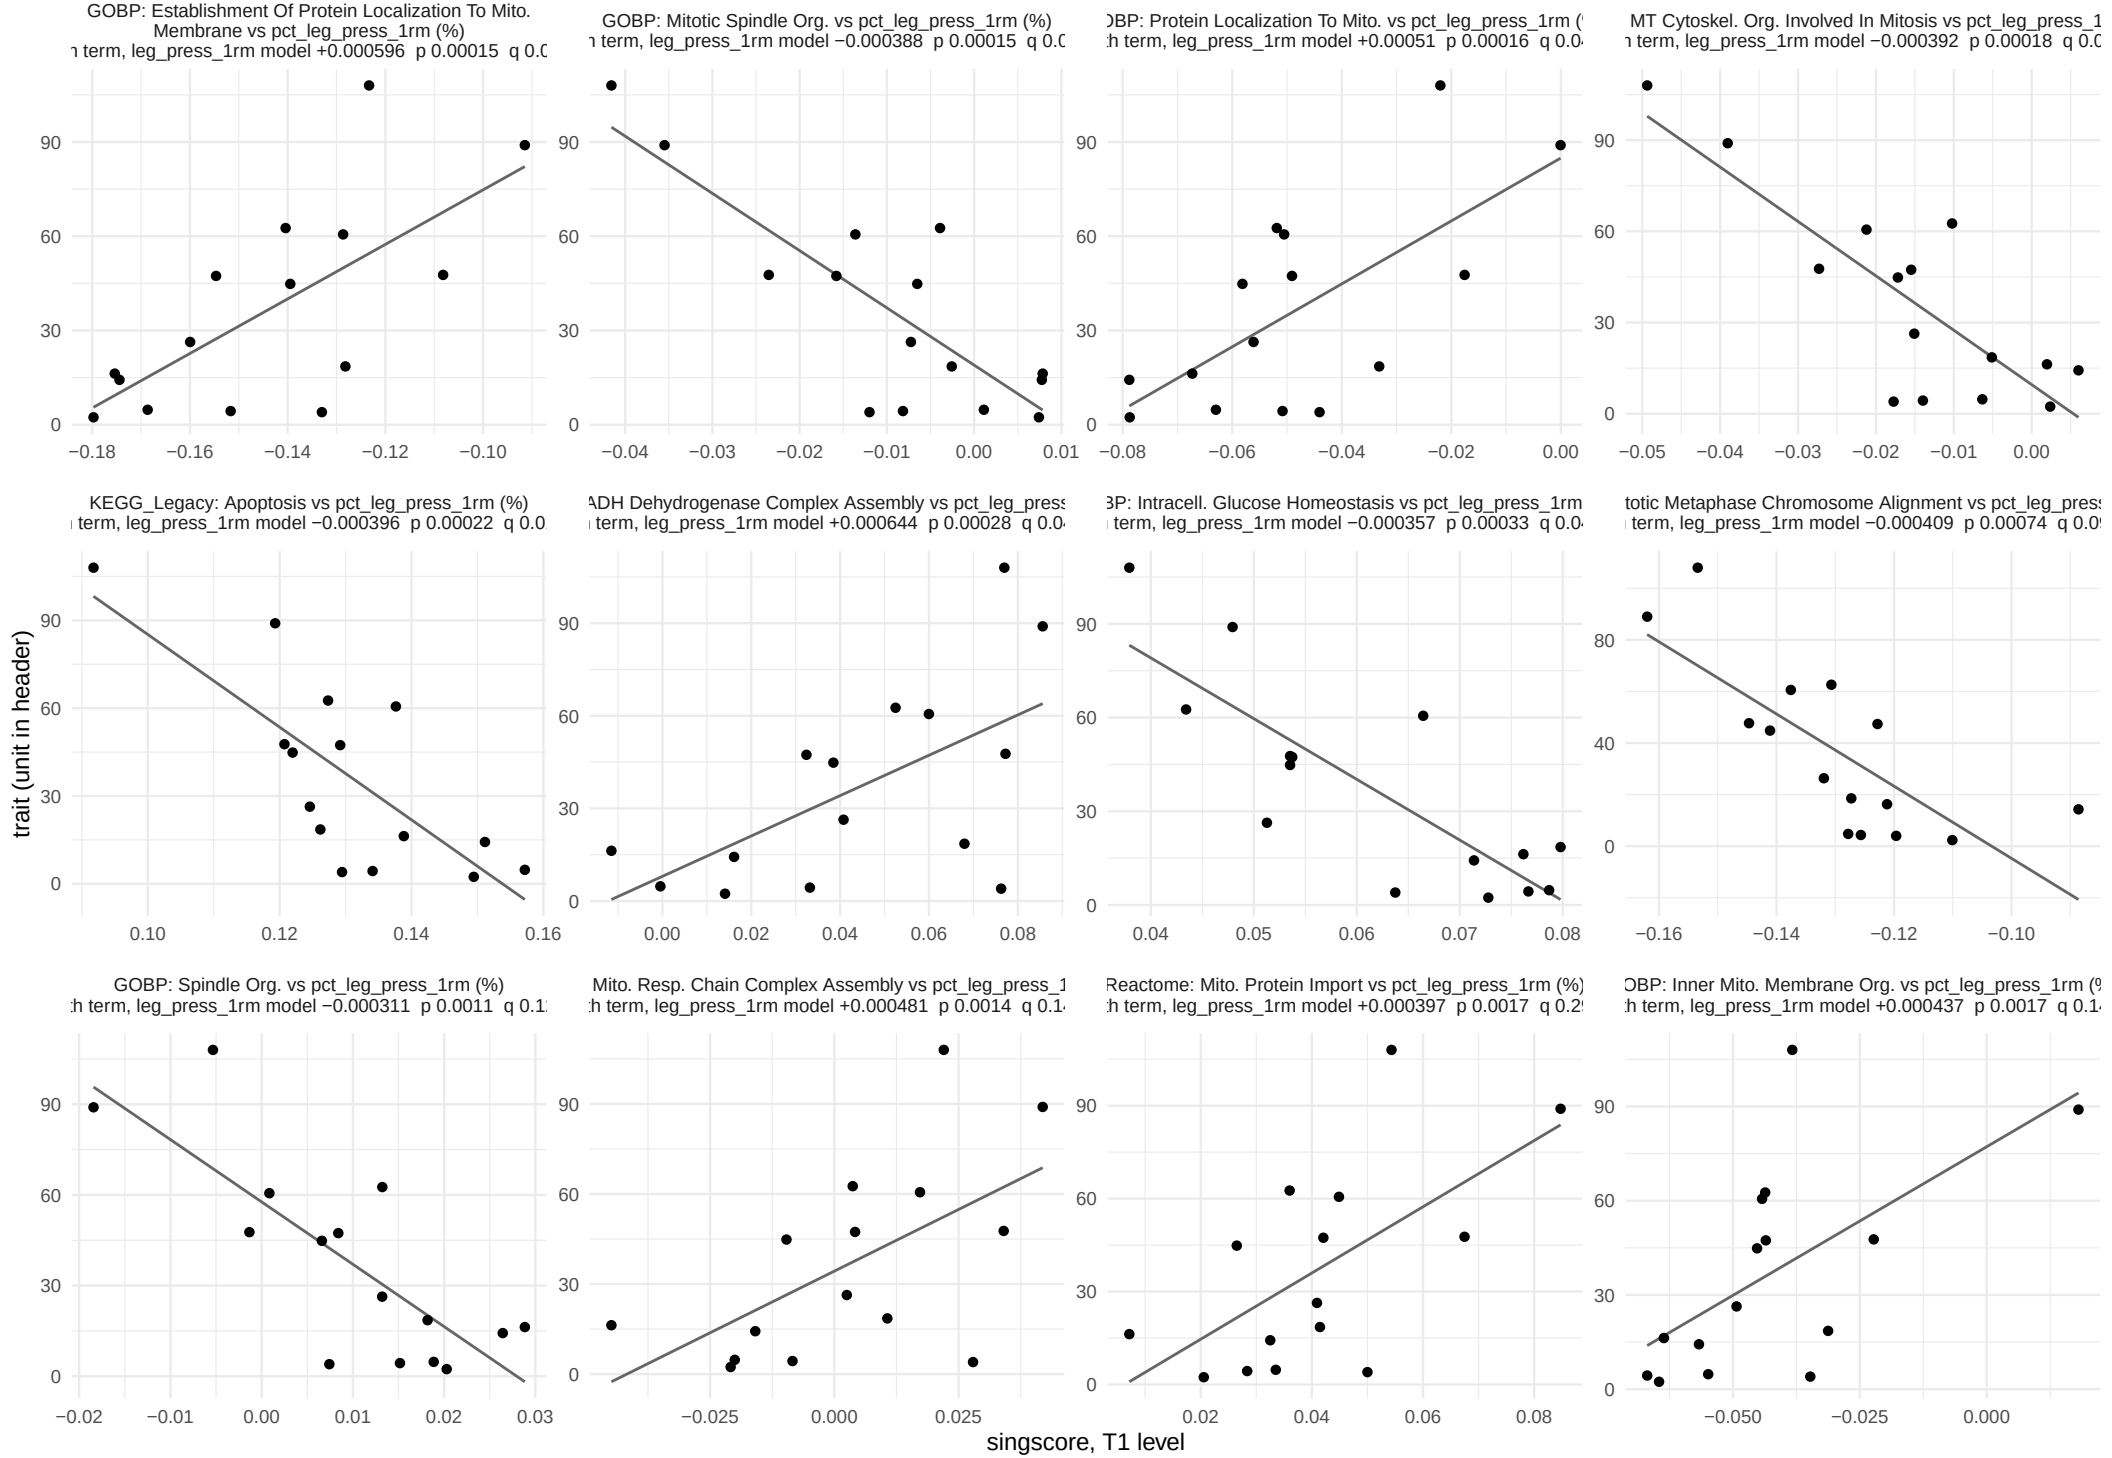

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own trait; the drawing does not hold the other predictor fixed. Table: c_data/set_trait_associations.xlsx, two_predictor.

Two predictor, baseline window


334 of 5512 feature−trait pairs at p < 0.05, 7 at BH < 0.05. Page 2 of 2.

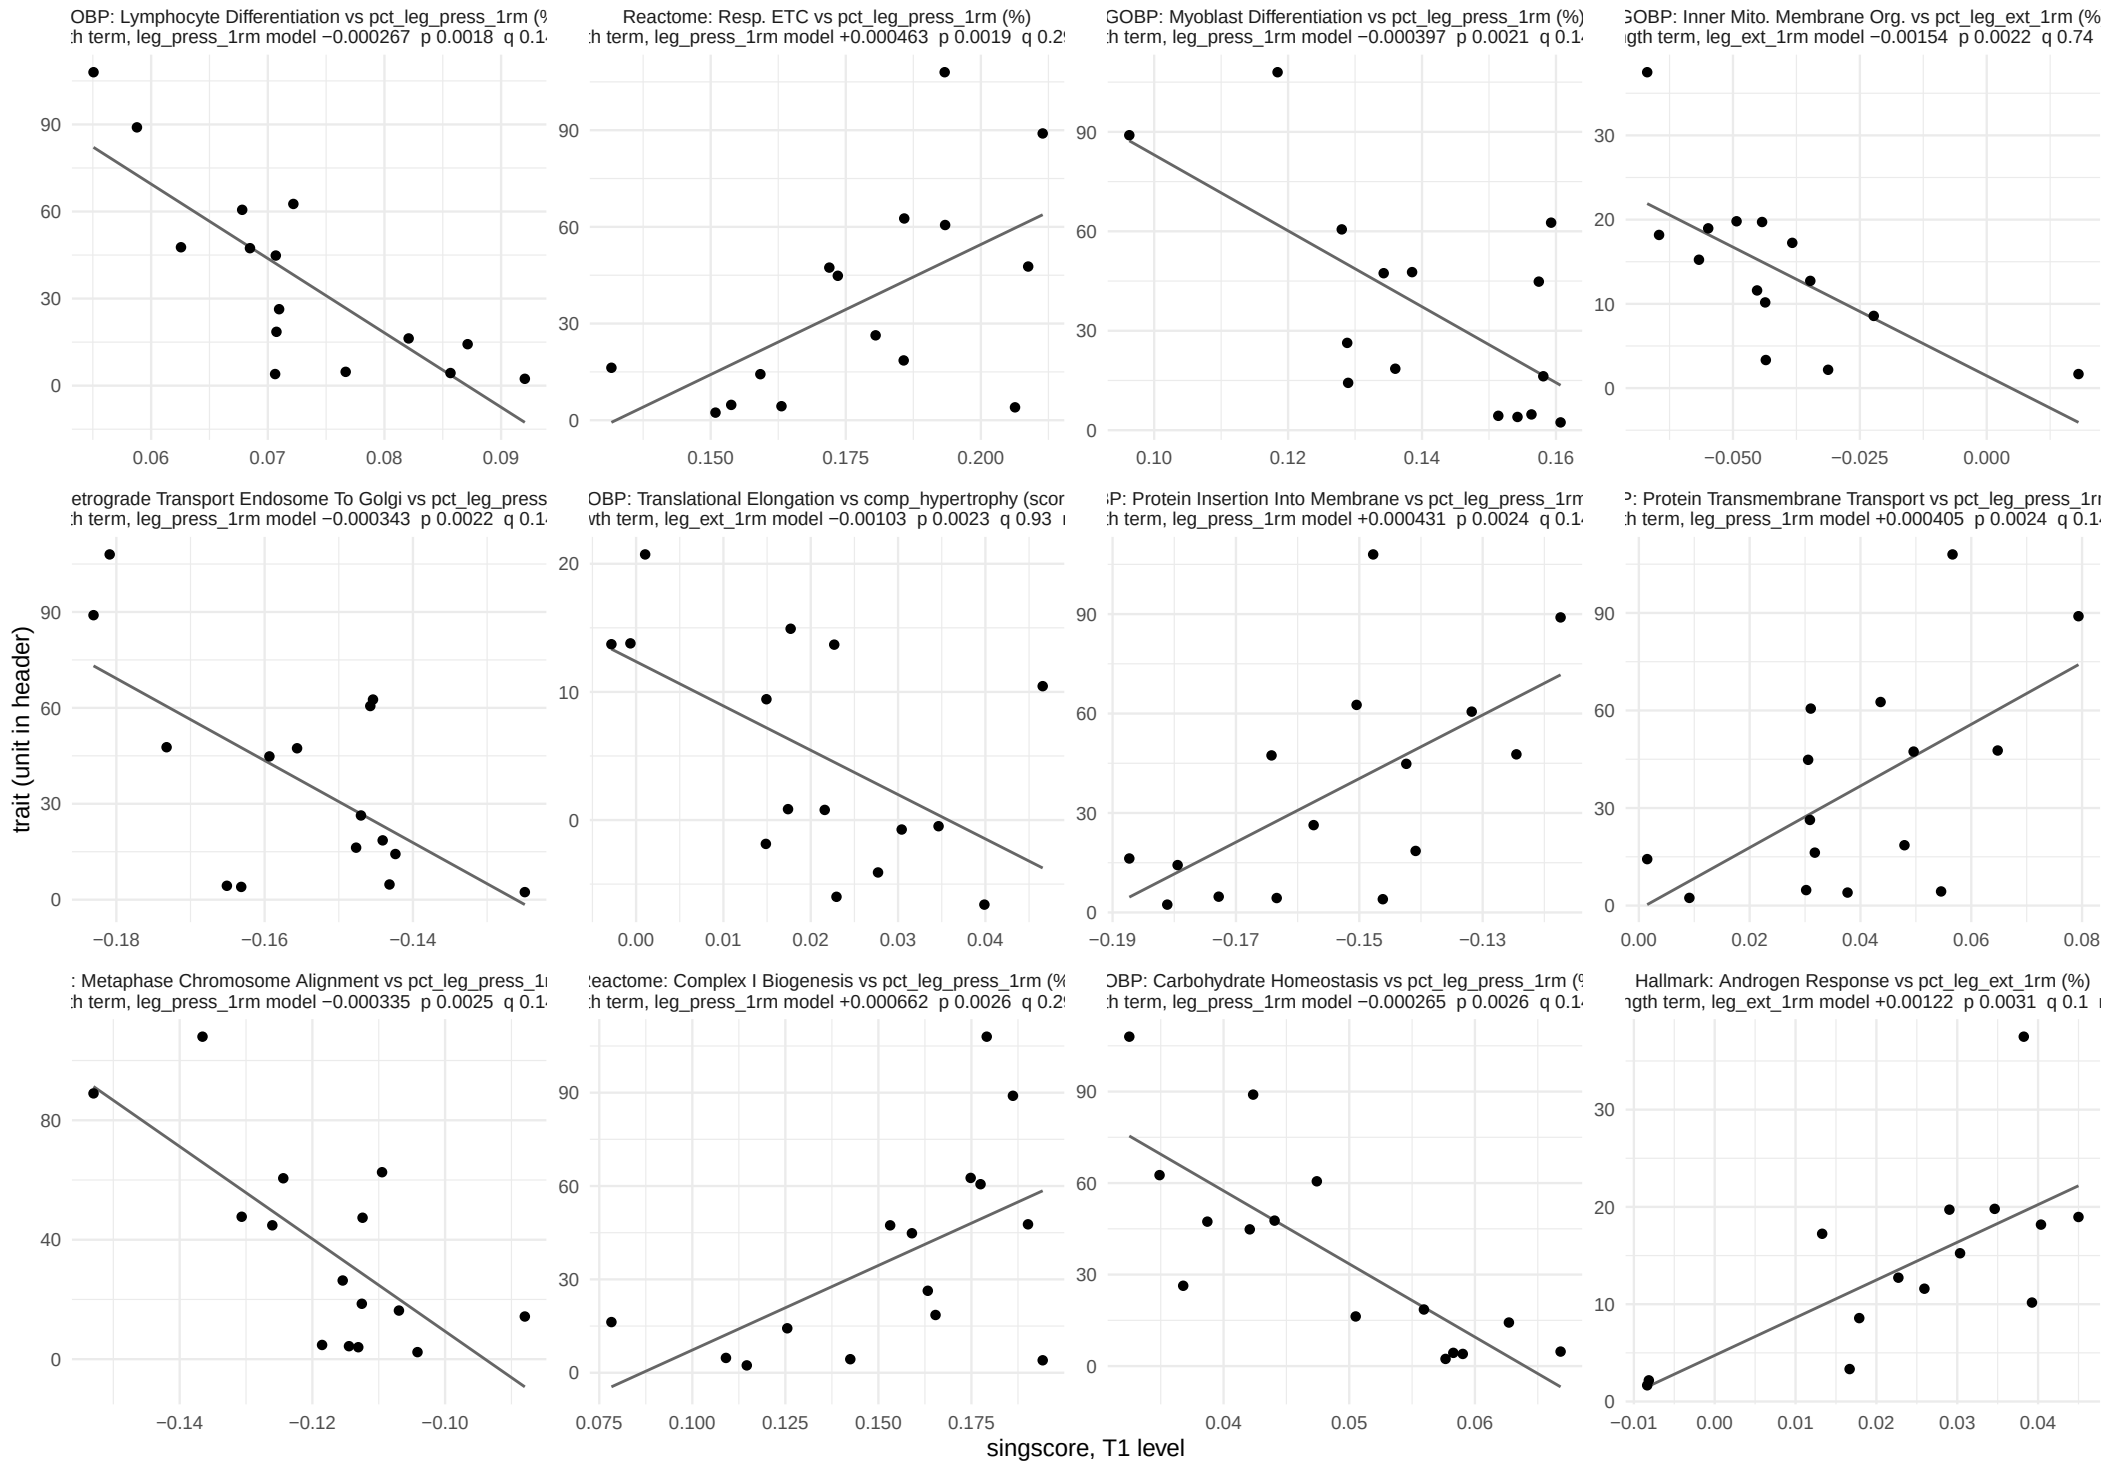

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own trait; the drawing does not hold the other predictor fixed. Table: c_data/set_trait_associations.xlsx, two_predictor.

Two predictor, acute window


178 of 5512 feature−trait pairs at p < 0.05, 1 at BH < 0.05. Page 1 of 2.

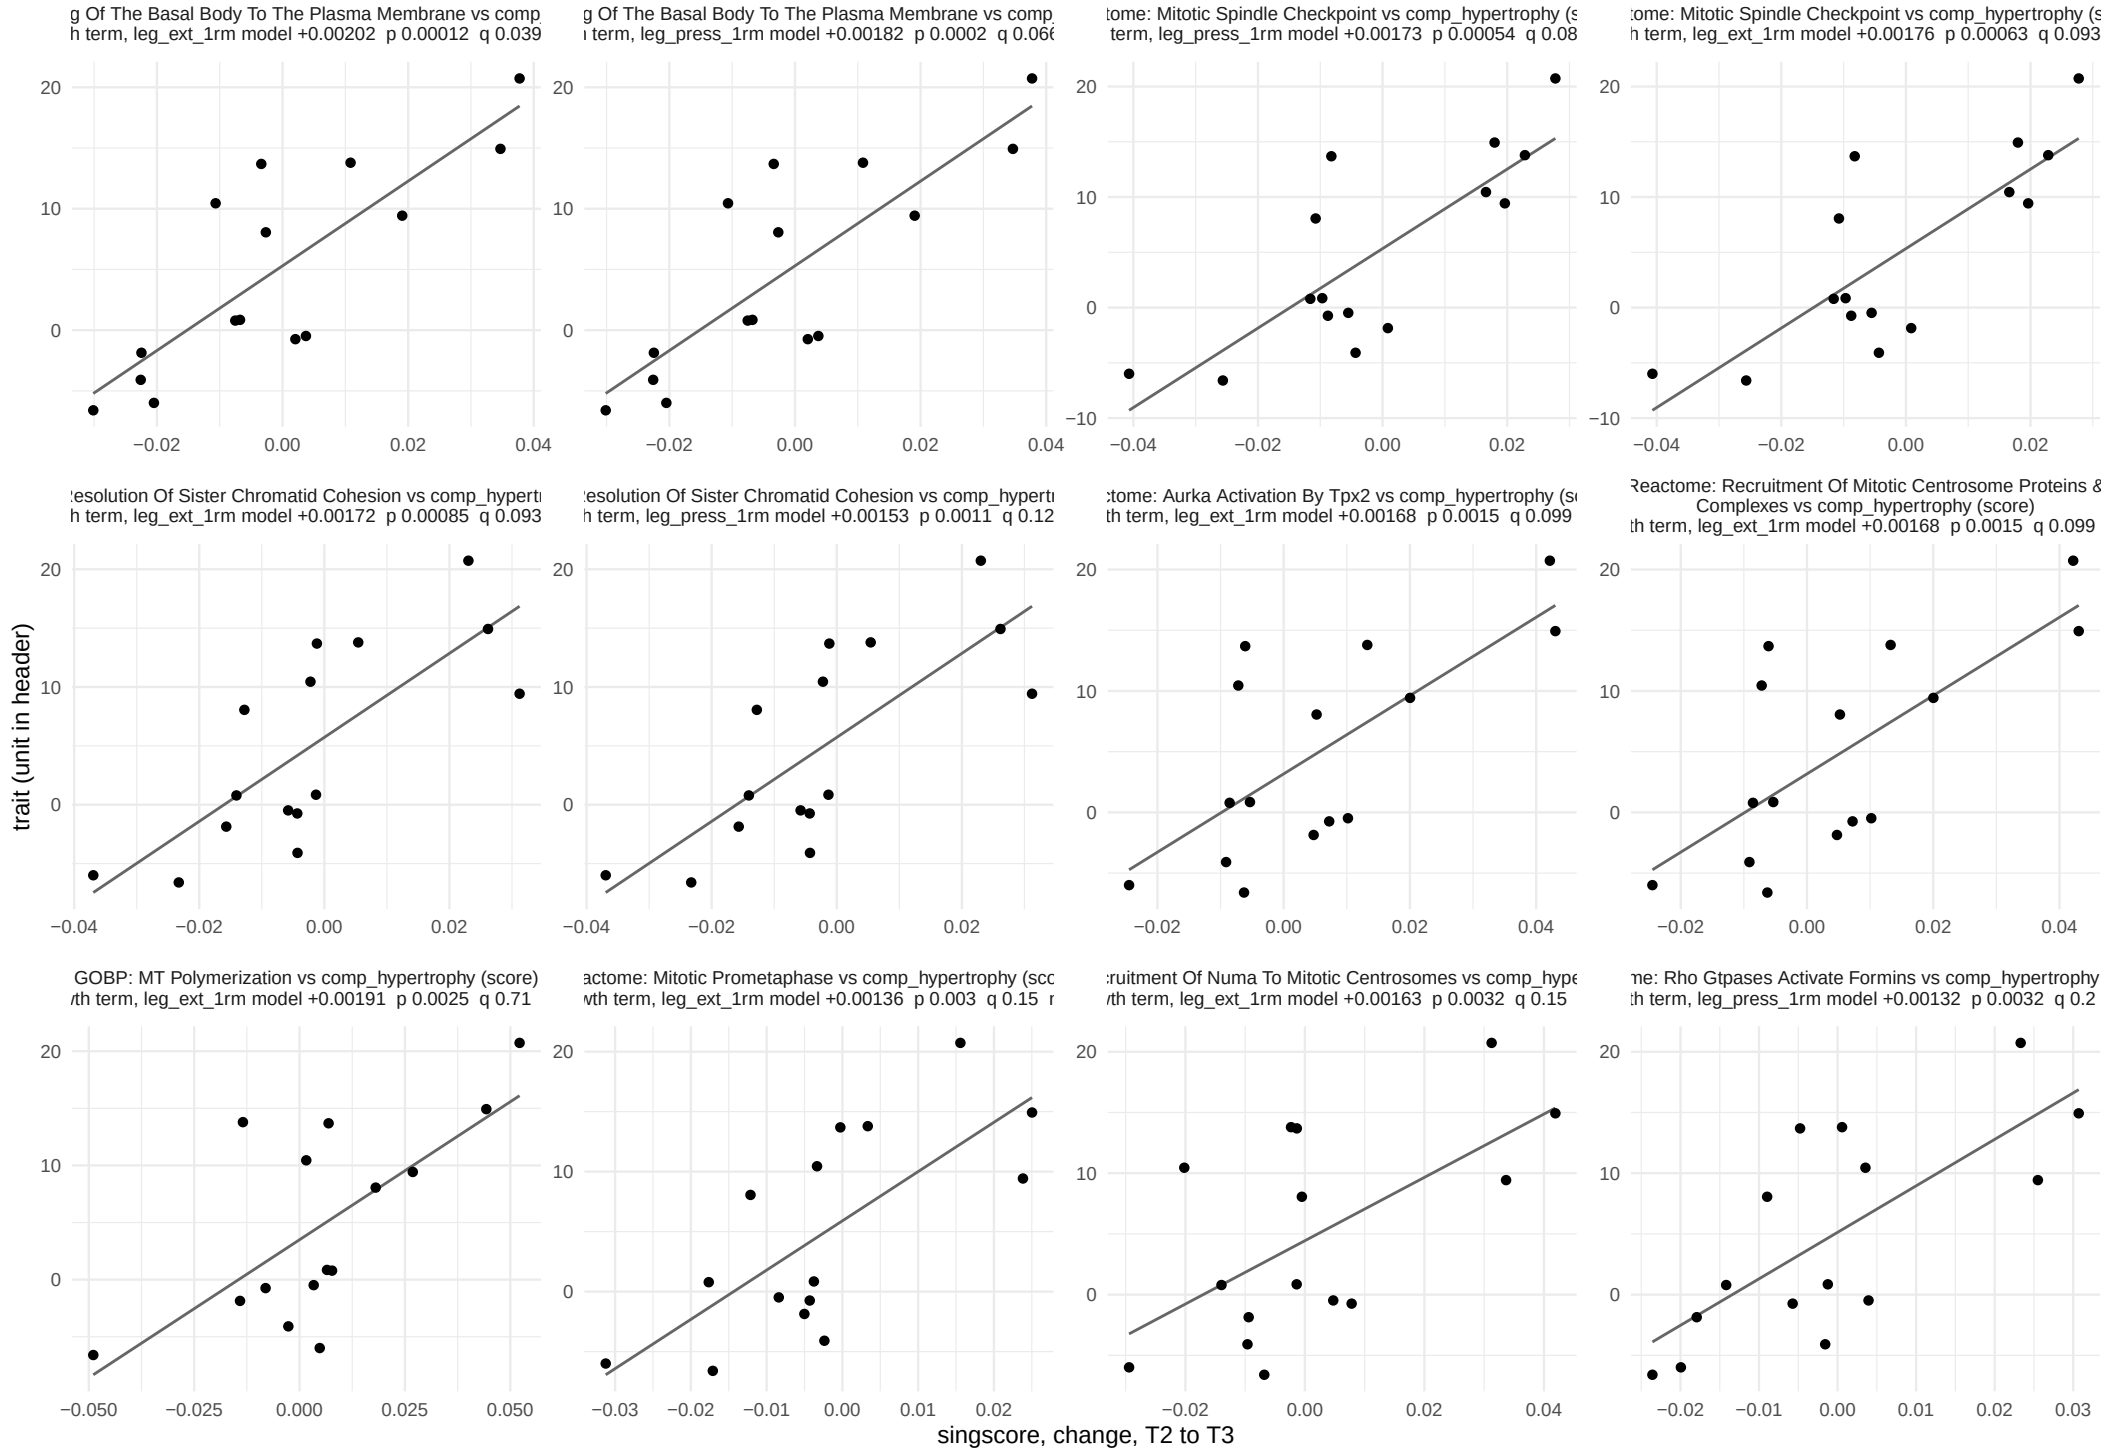

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own trait; the drawing does not hold the other predictor fixed. Table: c_data/set_trait_associations.xlsx, two_predictor.

Two predictor, acute window

178 of 5512 feature−trait pairs at p < 0.05, 1 at BH < 0.05. Page 2 of 2.

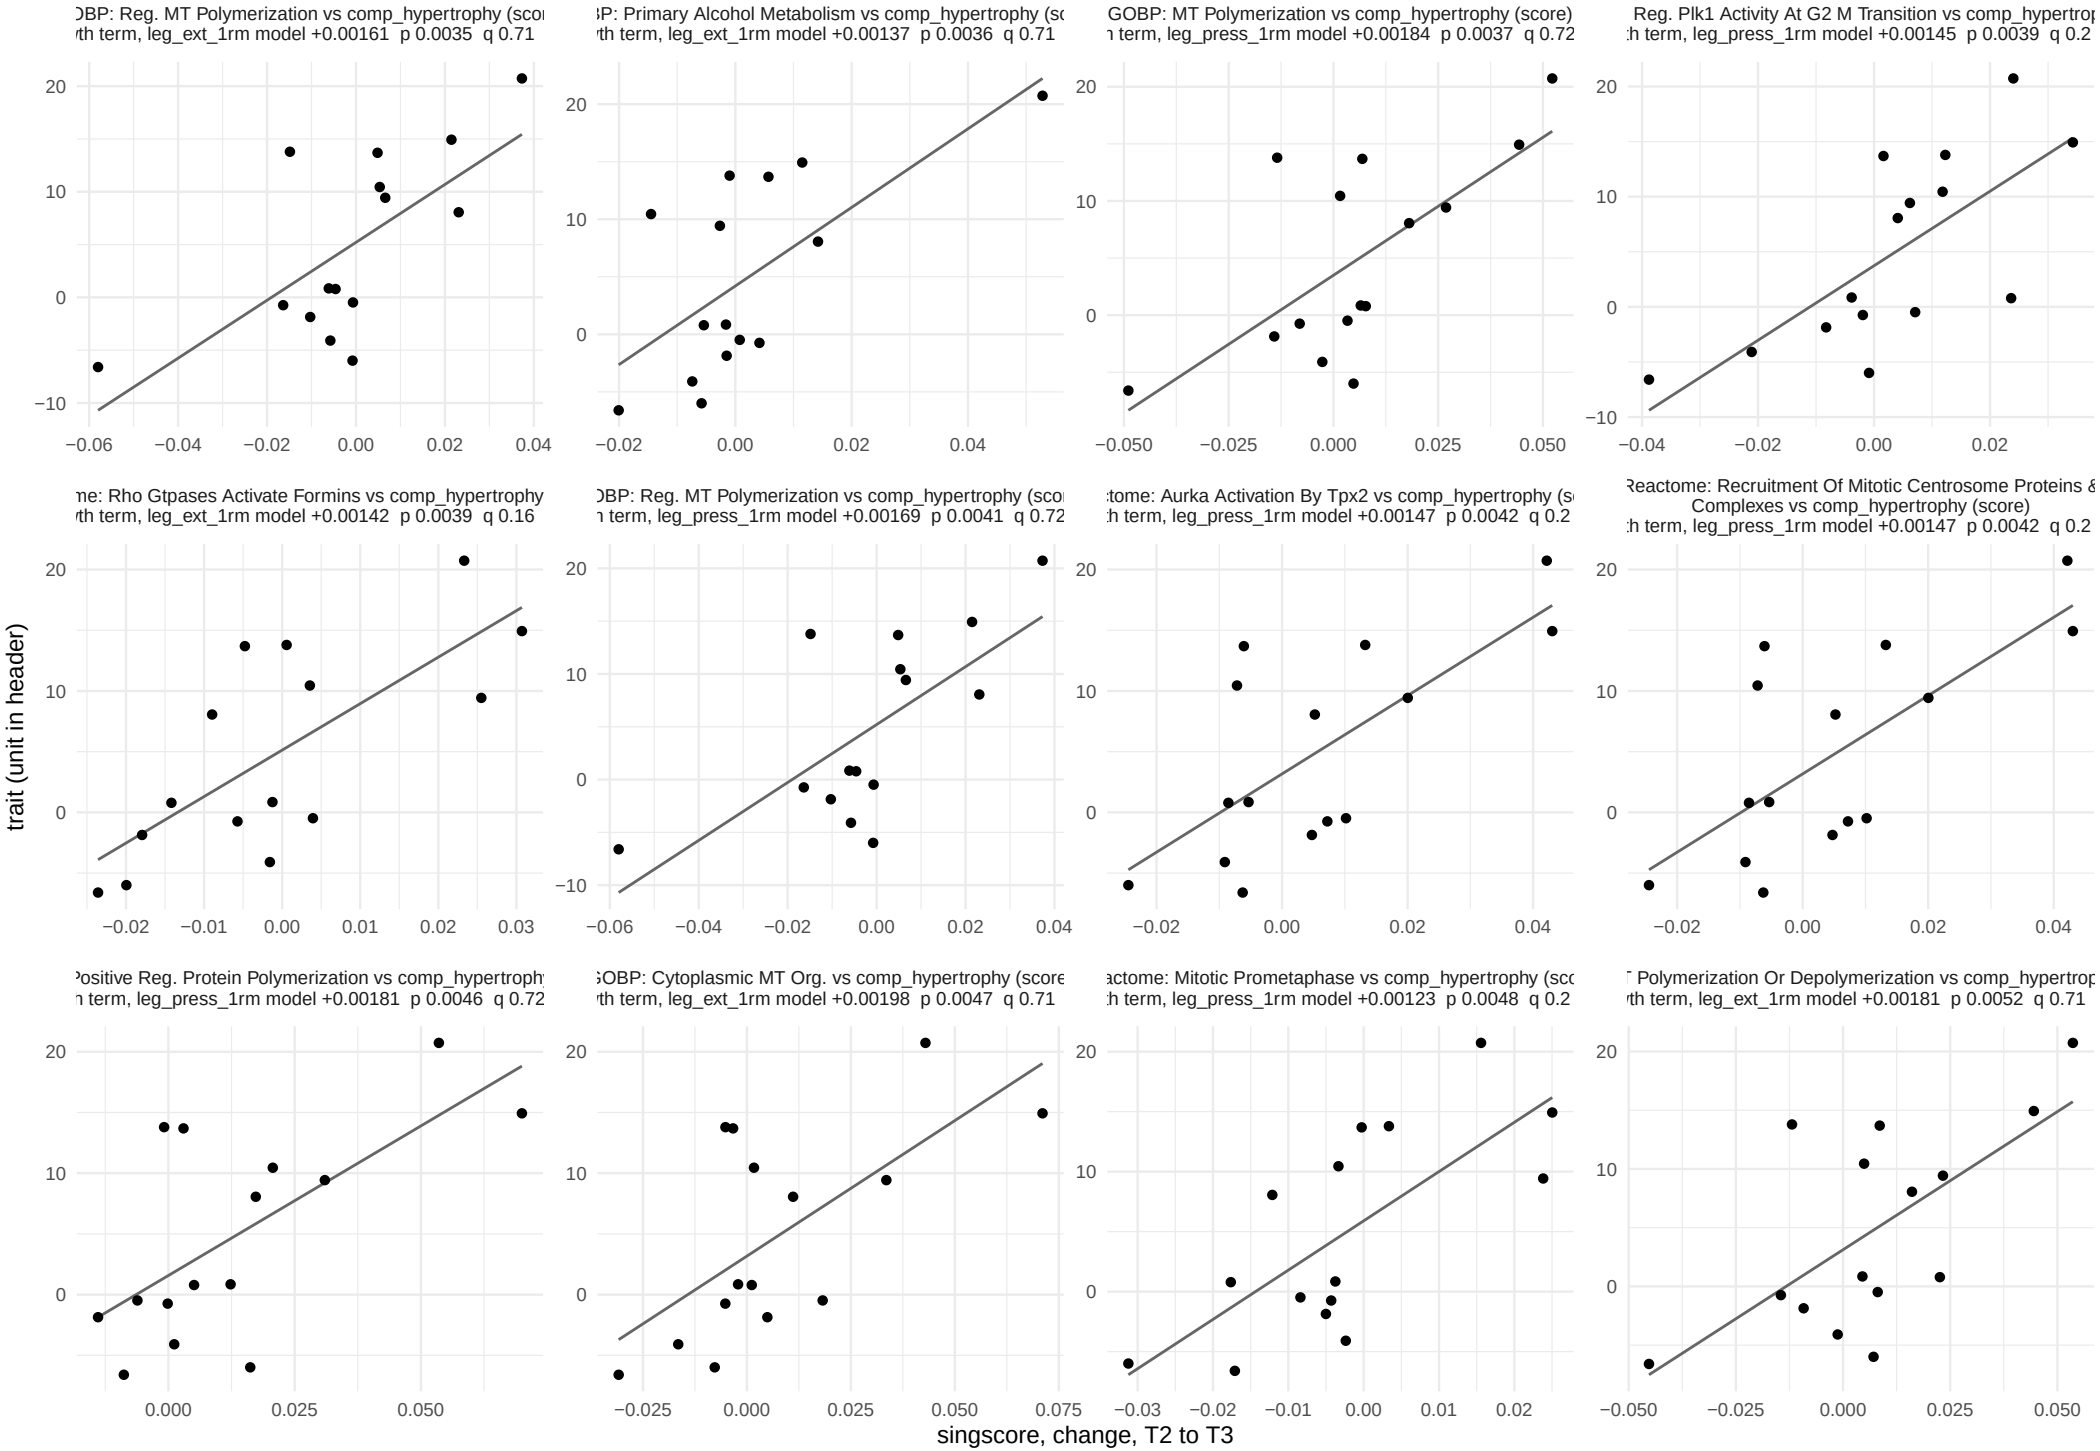

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own trait; the drawing does not hold the other predictor fixed. Table: c_data/set_trait_associations.xlsx, two_predictor.