

Sample model overview: modules

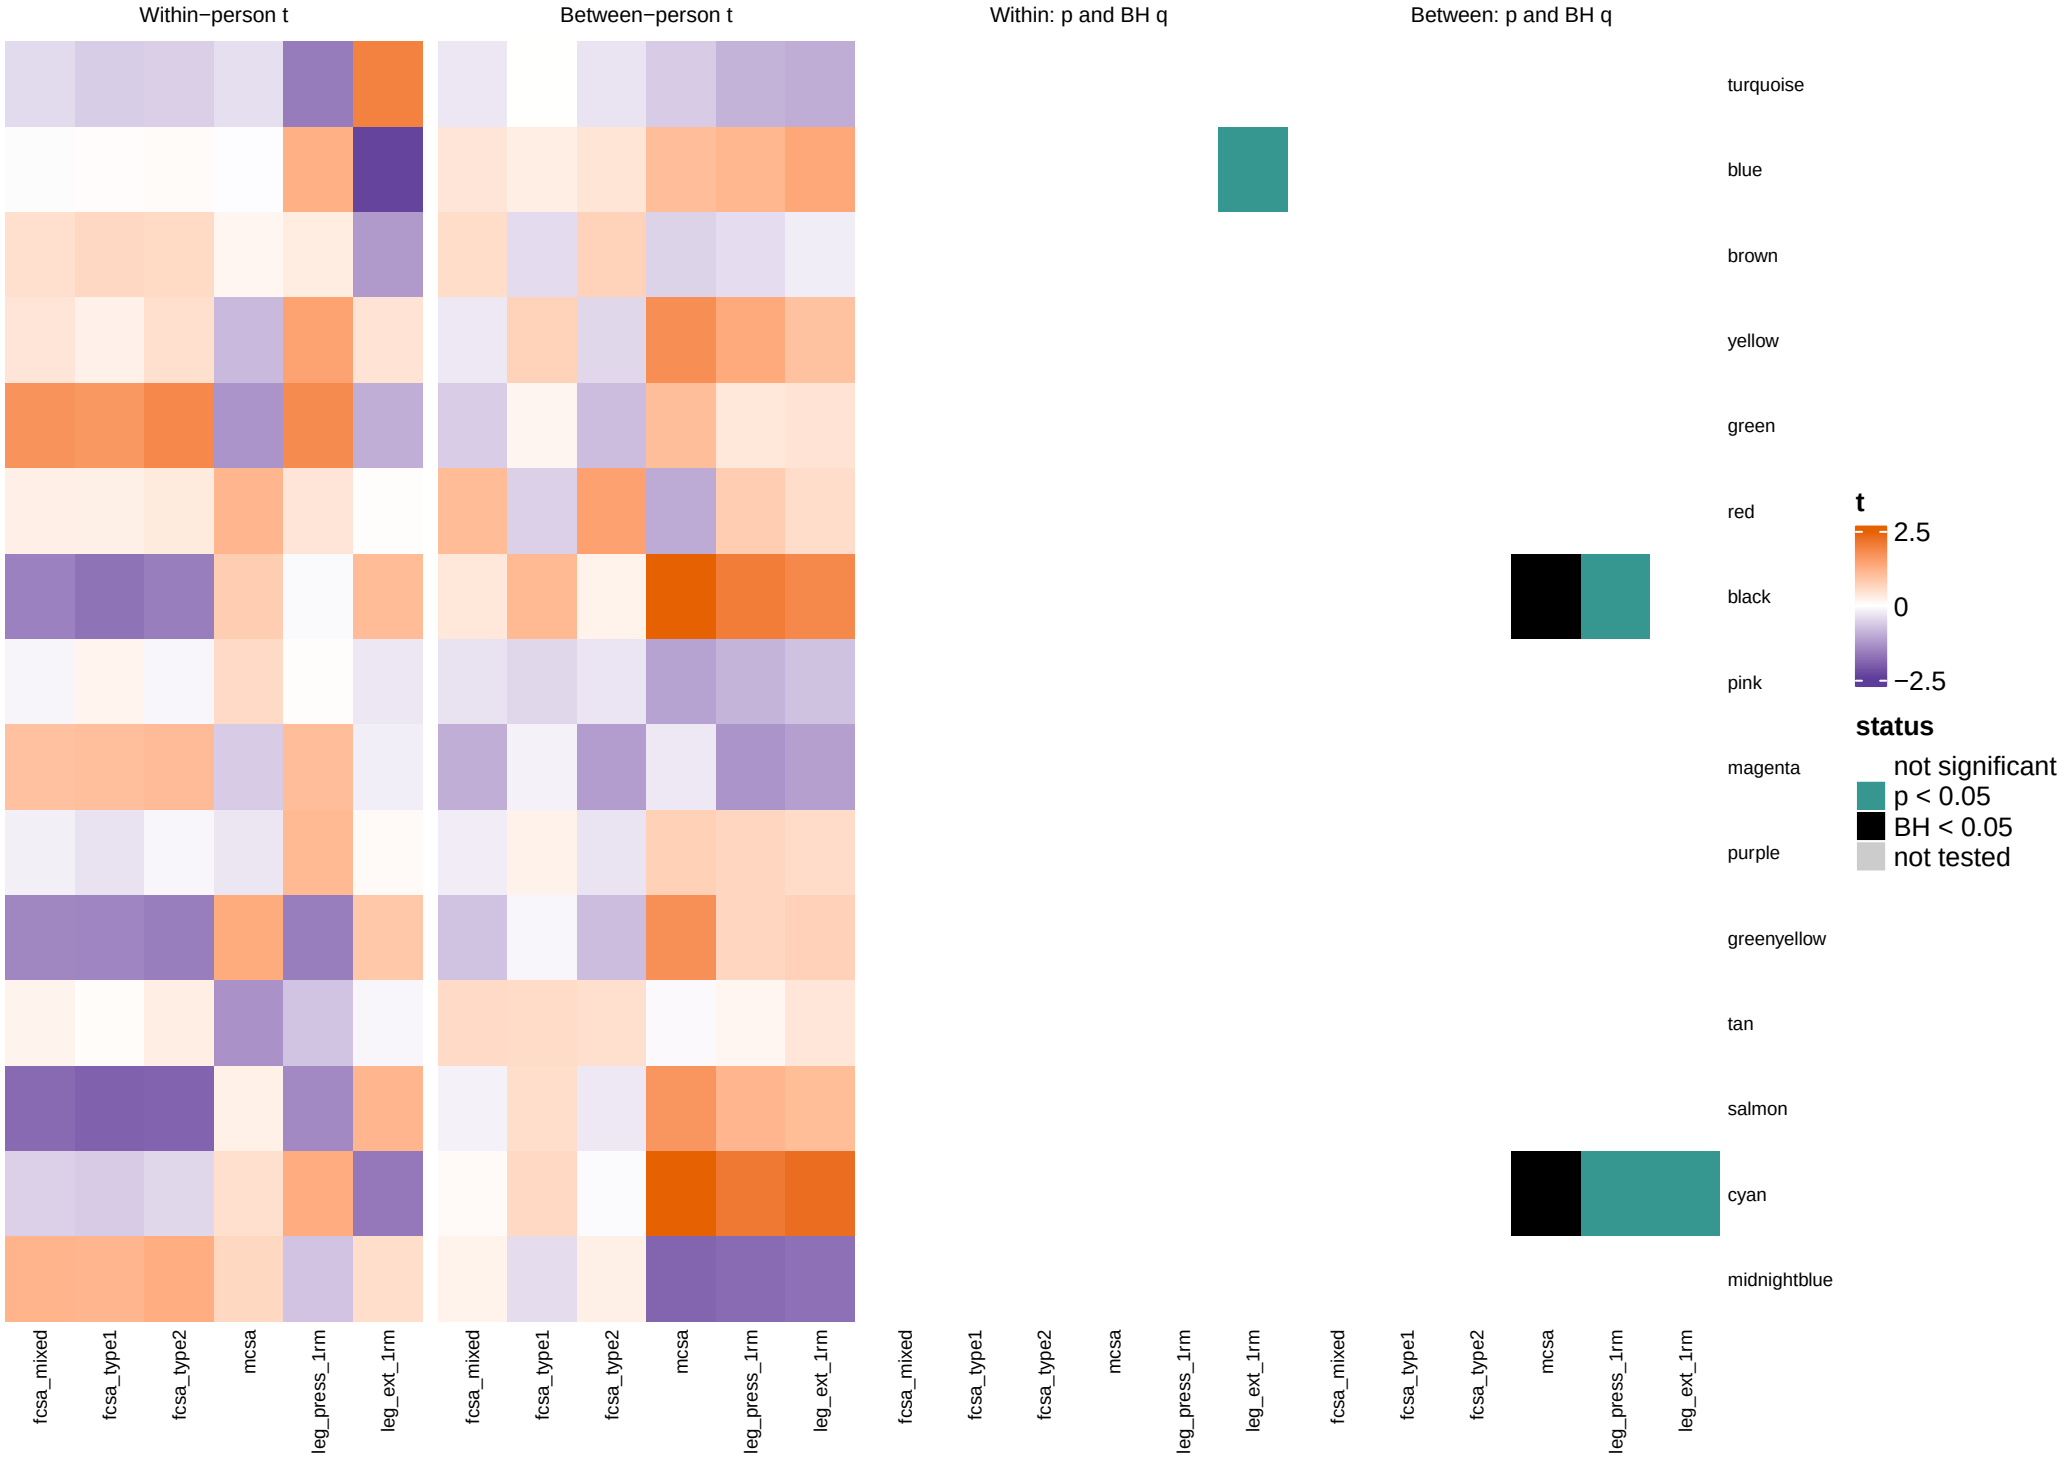

All 15 modules, one row each. Moderated t of the within and between terms, abundance ~ timepoint + between + within, subject blocked. Colours stop at the 99th percentile of |t|, 2.5. Rows follow module size. Grey: not tested. Table: c_data/module_trait_associations.xlsx, model.

Change score overview, training window: modules

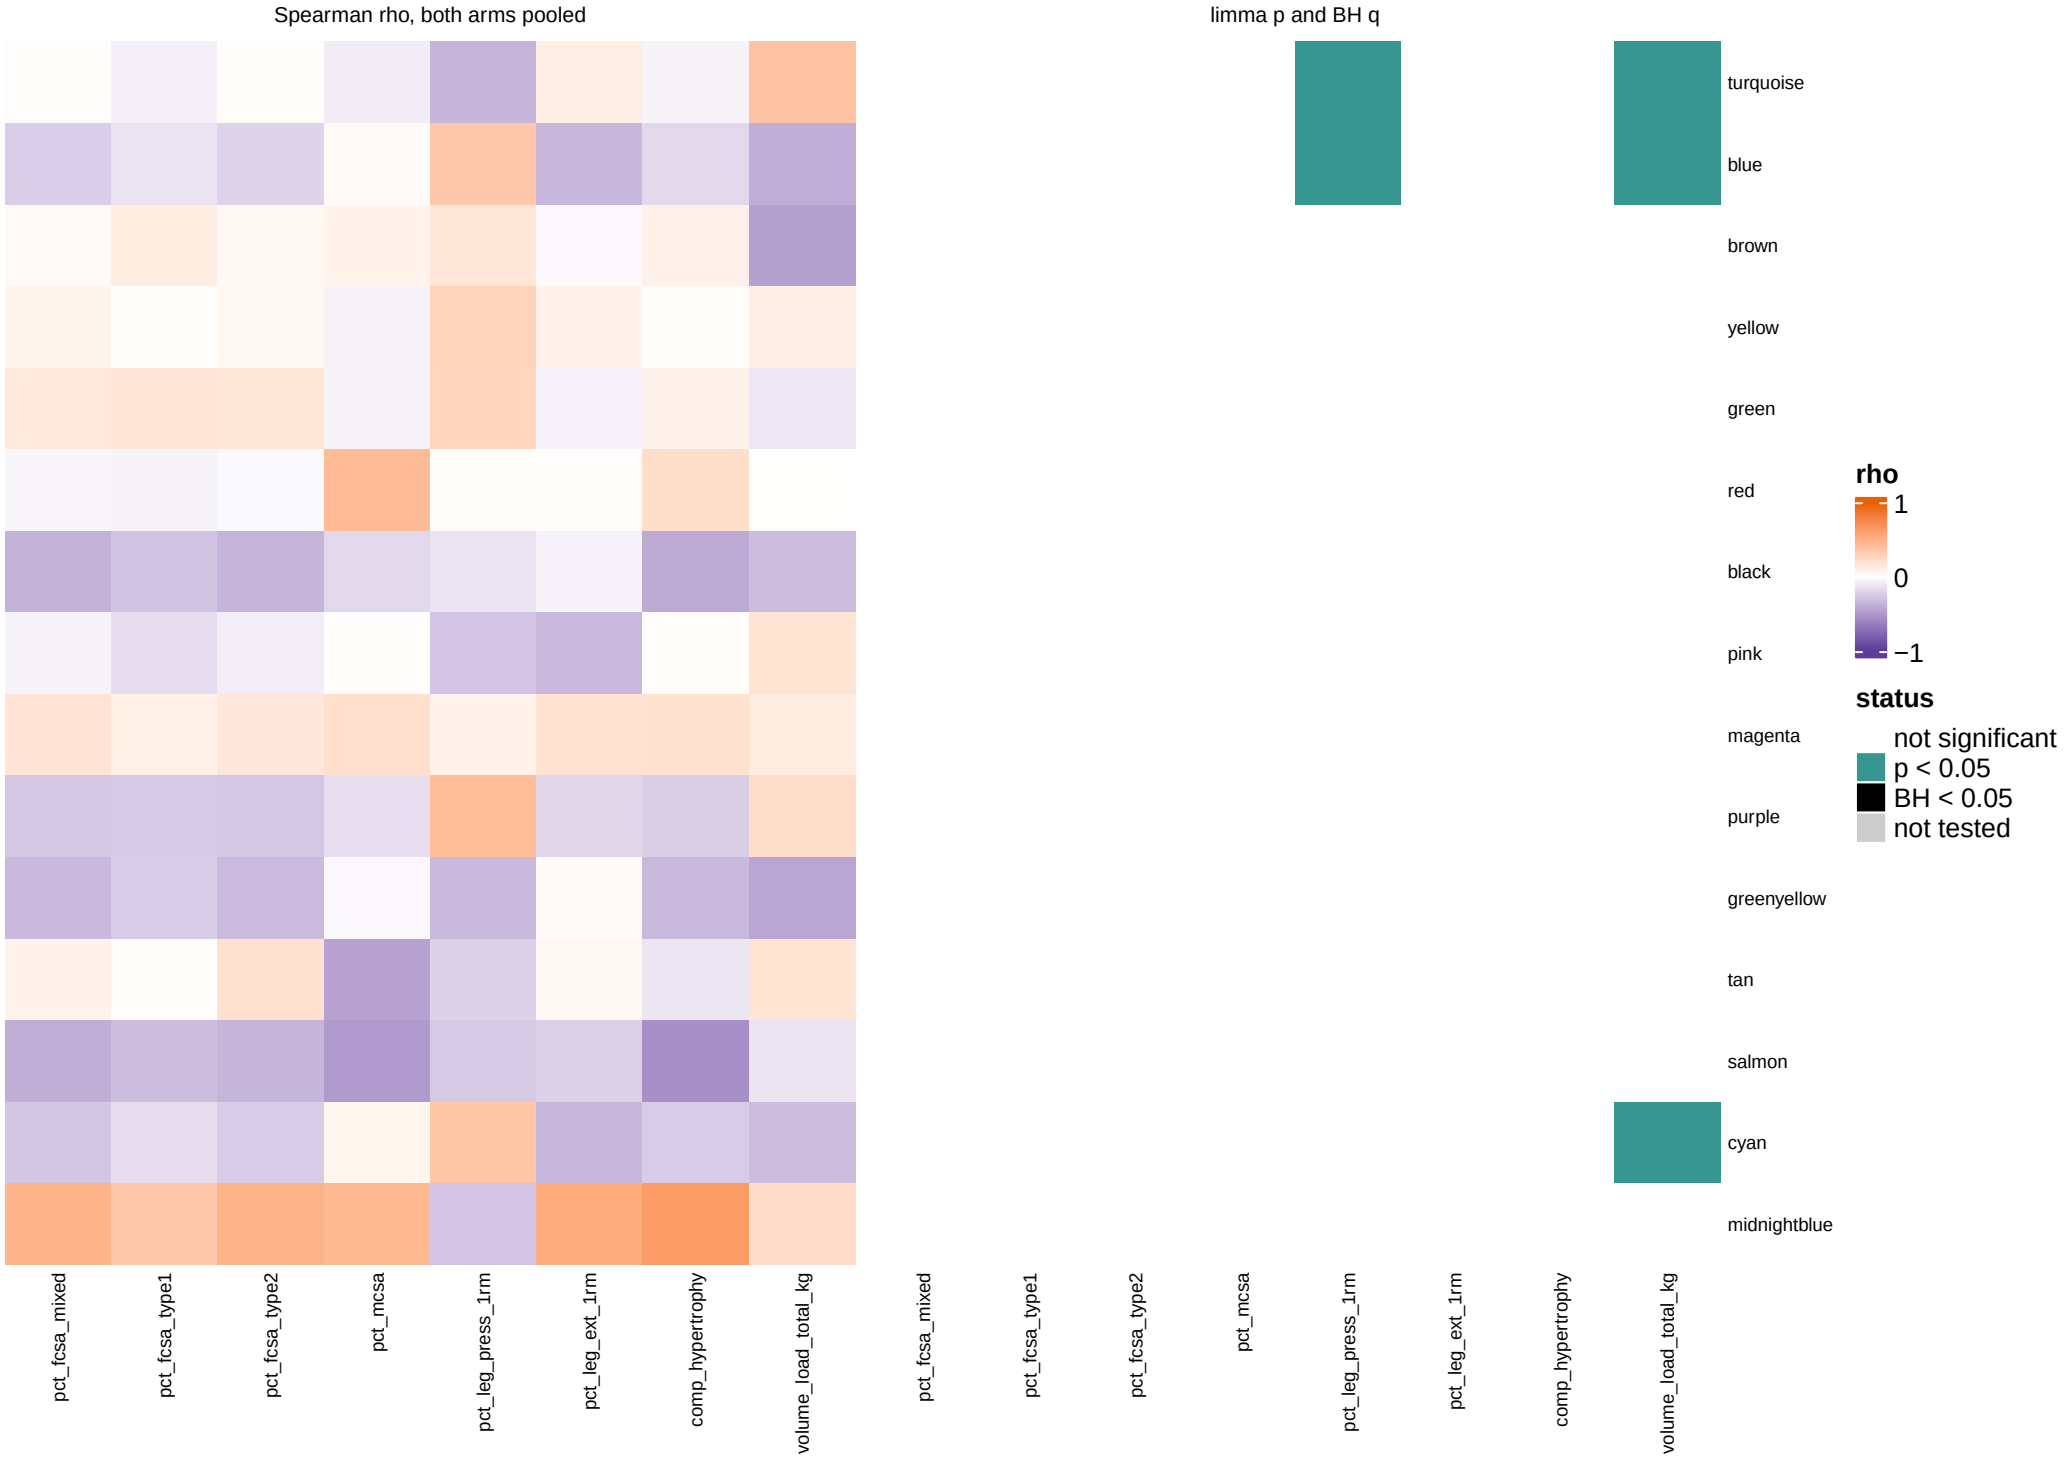

All 15 modules, one row each. Spearman rho between the eigengene (change, T1 to T2) and each trait; status from limma. Rows follow module size. Grey: not tested. Table: c_data/module_trait_associations.xlsx, change_score.

Change score overview, baseline window: modules




All 15 modules, one row each. Spearman rho between the eigengene (T1 level) and each trait; status from limma. Rows follow module size. Grey: not tested. Table: c_data/module_trait_associations.xlsx, change_score.

Change score overview, acute window: modules




All 15 modules, one row each. Spearman rho between the eigengene (change, T2 to T3) and each trait; status from limma. Rows follow module size. Grey: not tested. Table: c_data/module_trait_associations.xlsx, change_score.

Change score overview, baseline_level window: modules

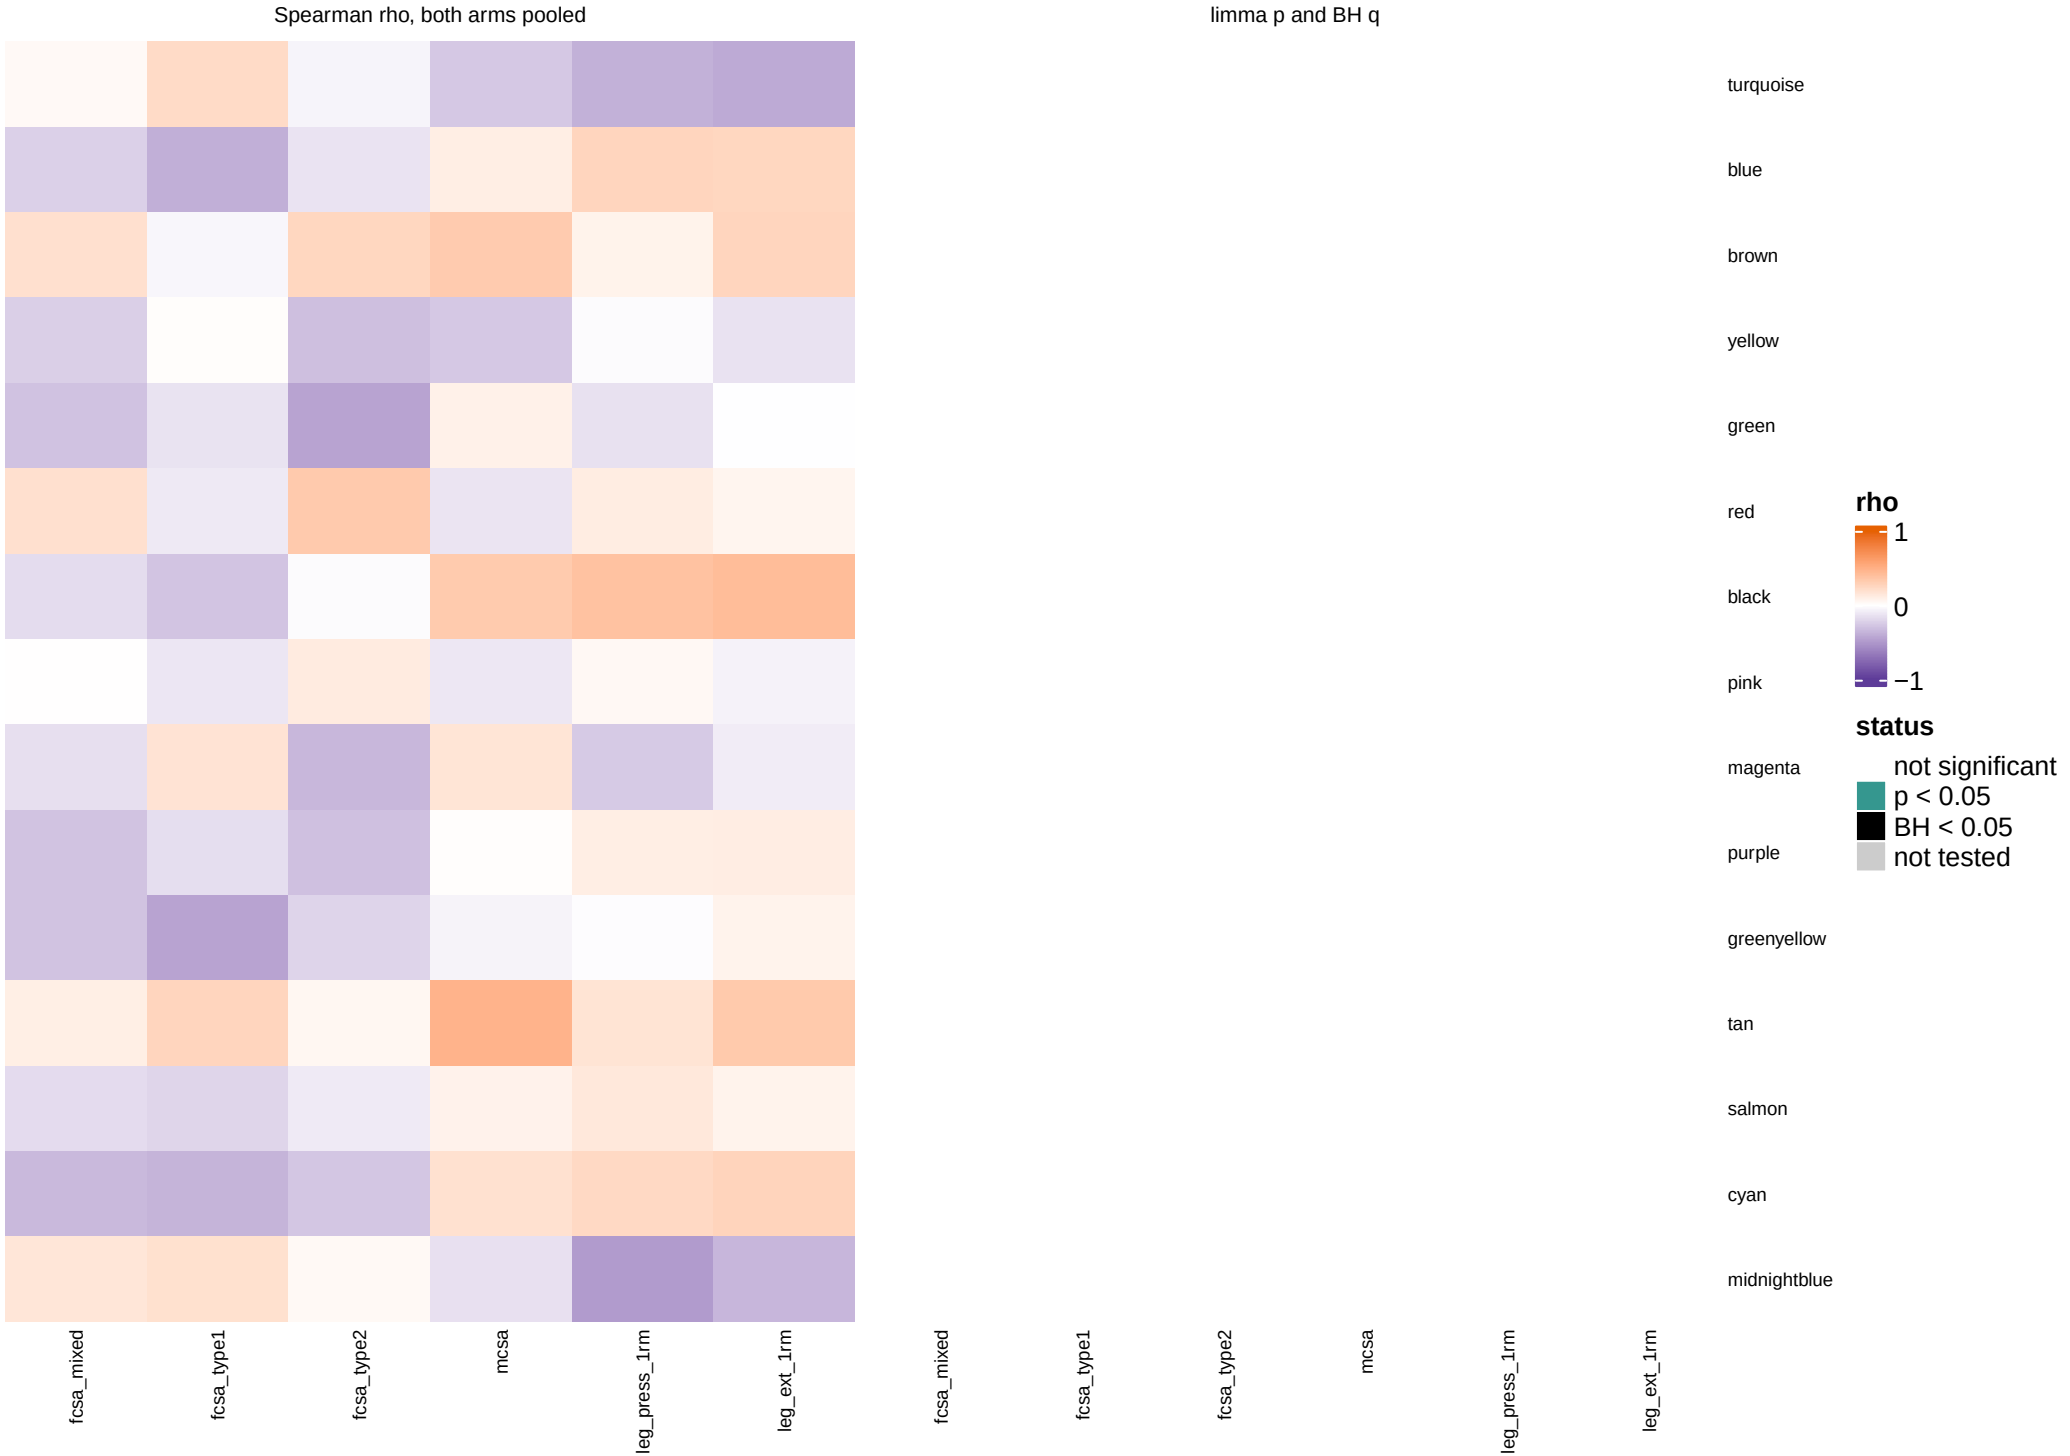


All 15 modules, one row each. Spearman rho between the eigengene (T1 level) and each trait; status from limma. Rows follow module size. Grey: not tested. Table: c_data/module_trait_associations.xlsx, change_score.

Change score overview, post_level window: modules

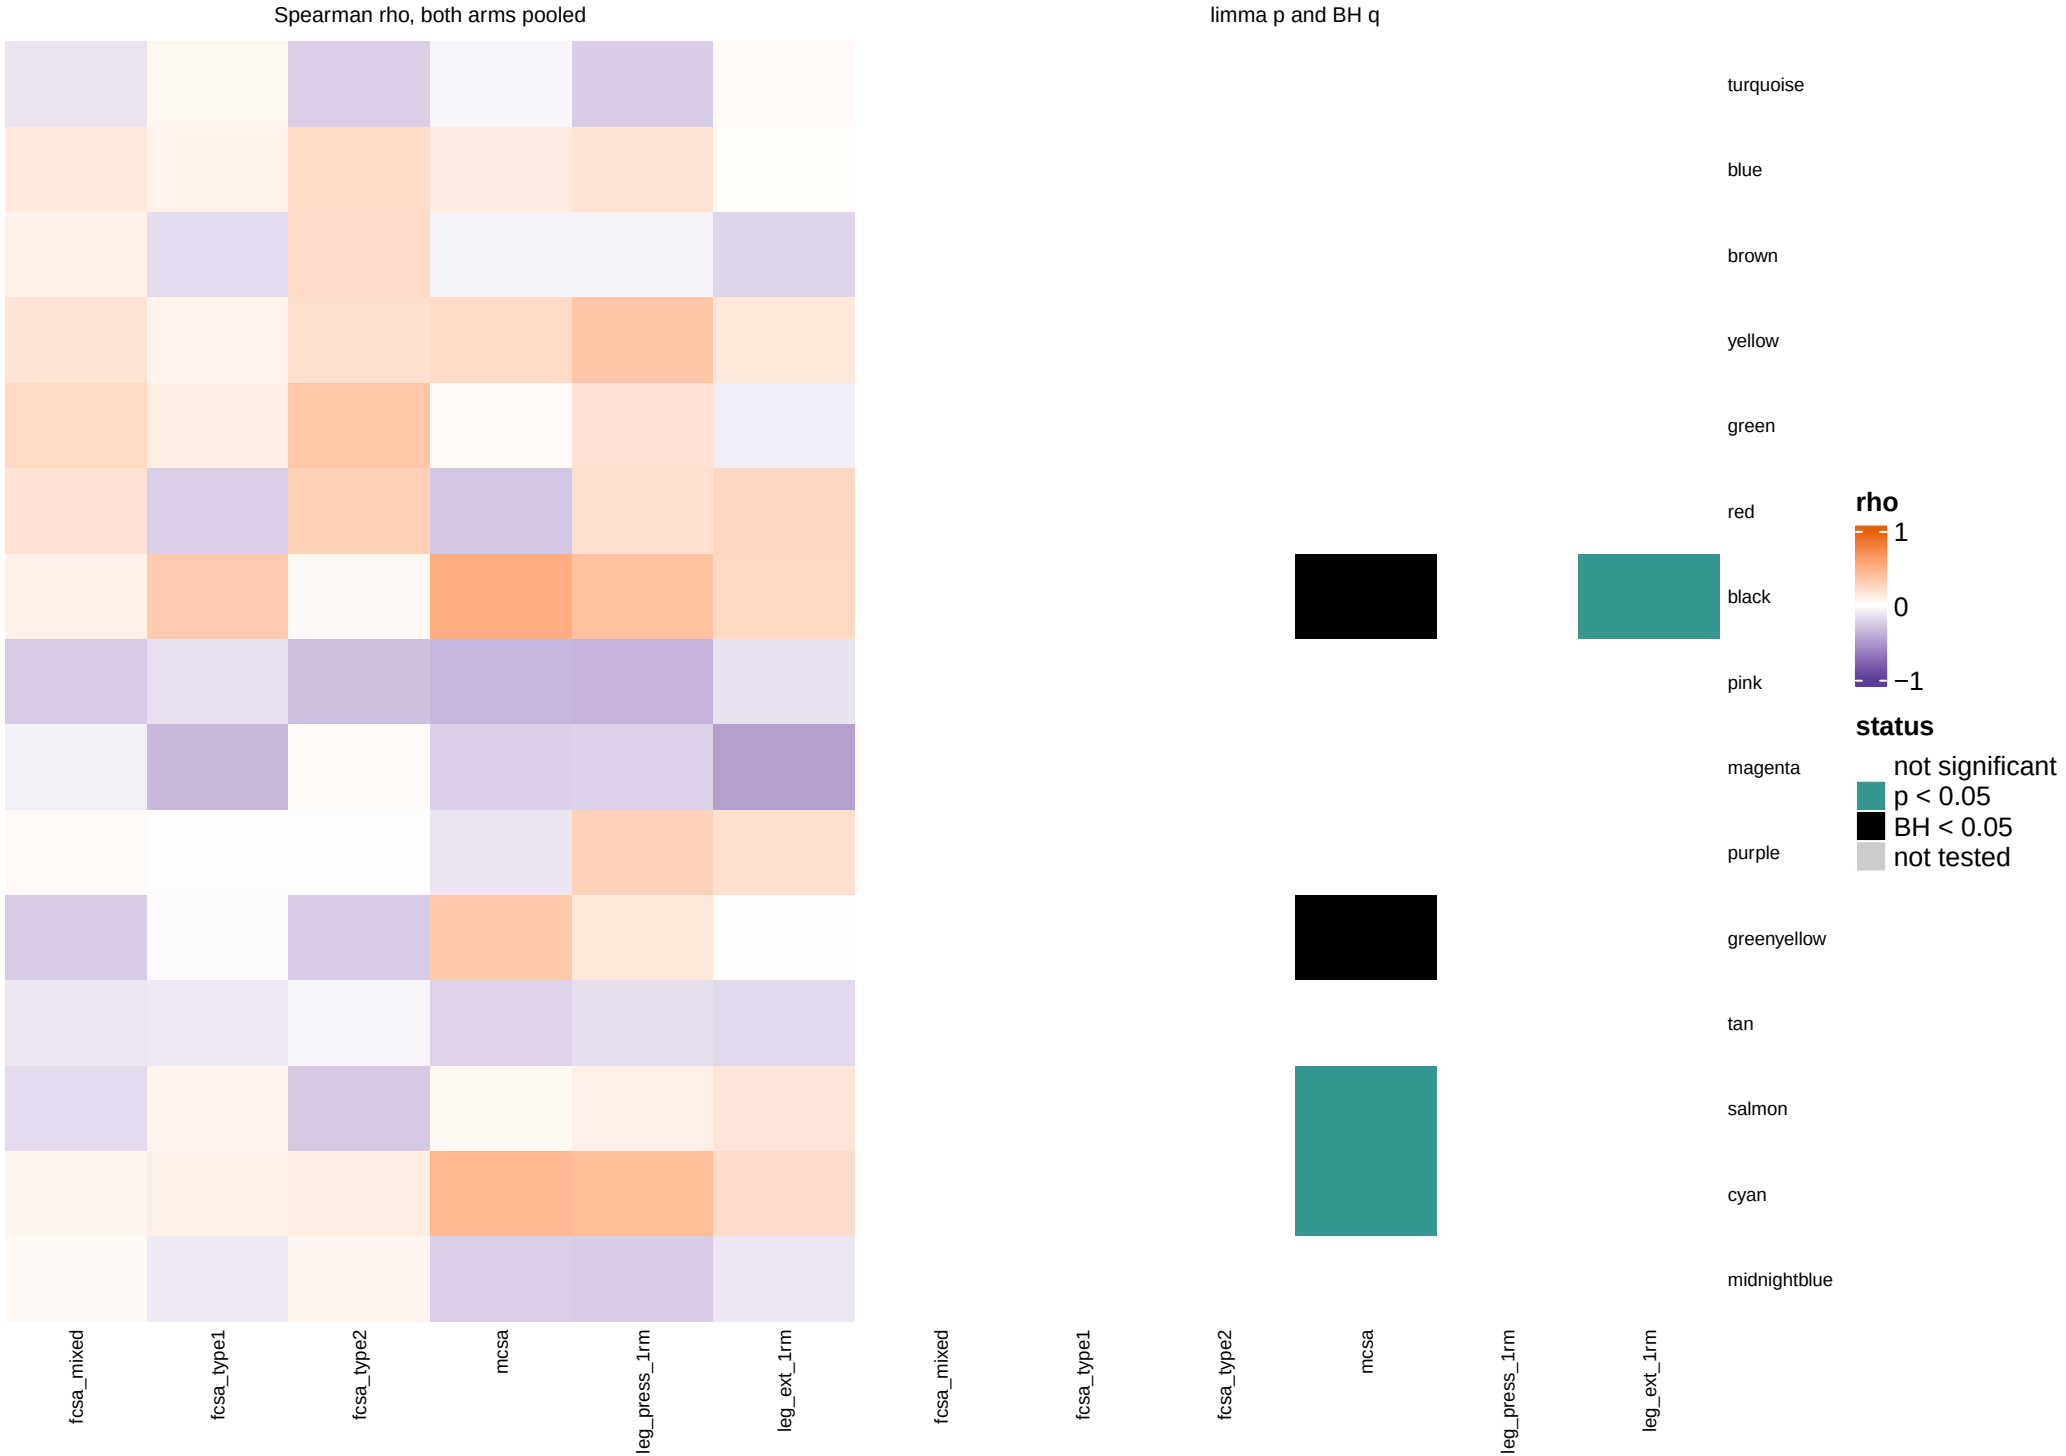

All 15 modules, one row each. Spearman rho between the eigengene (T2 level) and each trait; status from limma. Rows follow module size. Grey: not tested. Table: c_data/module_trait_associations.xlsx, change_score.


Change score overview, post_bout_level window: modules

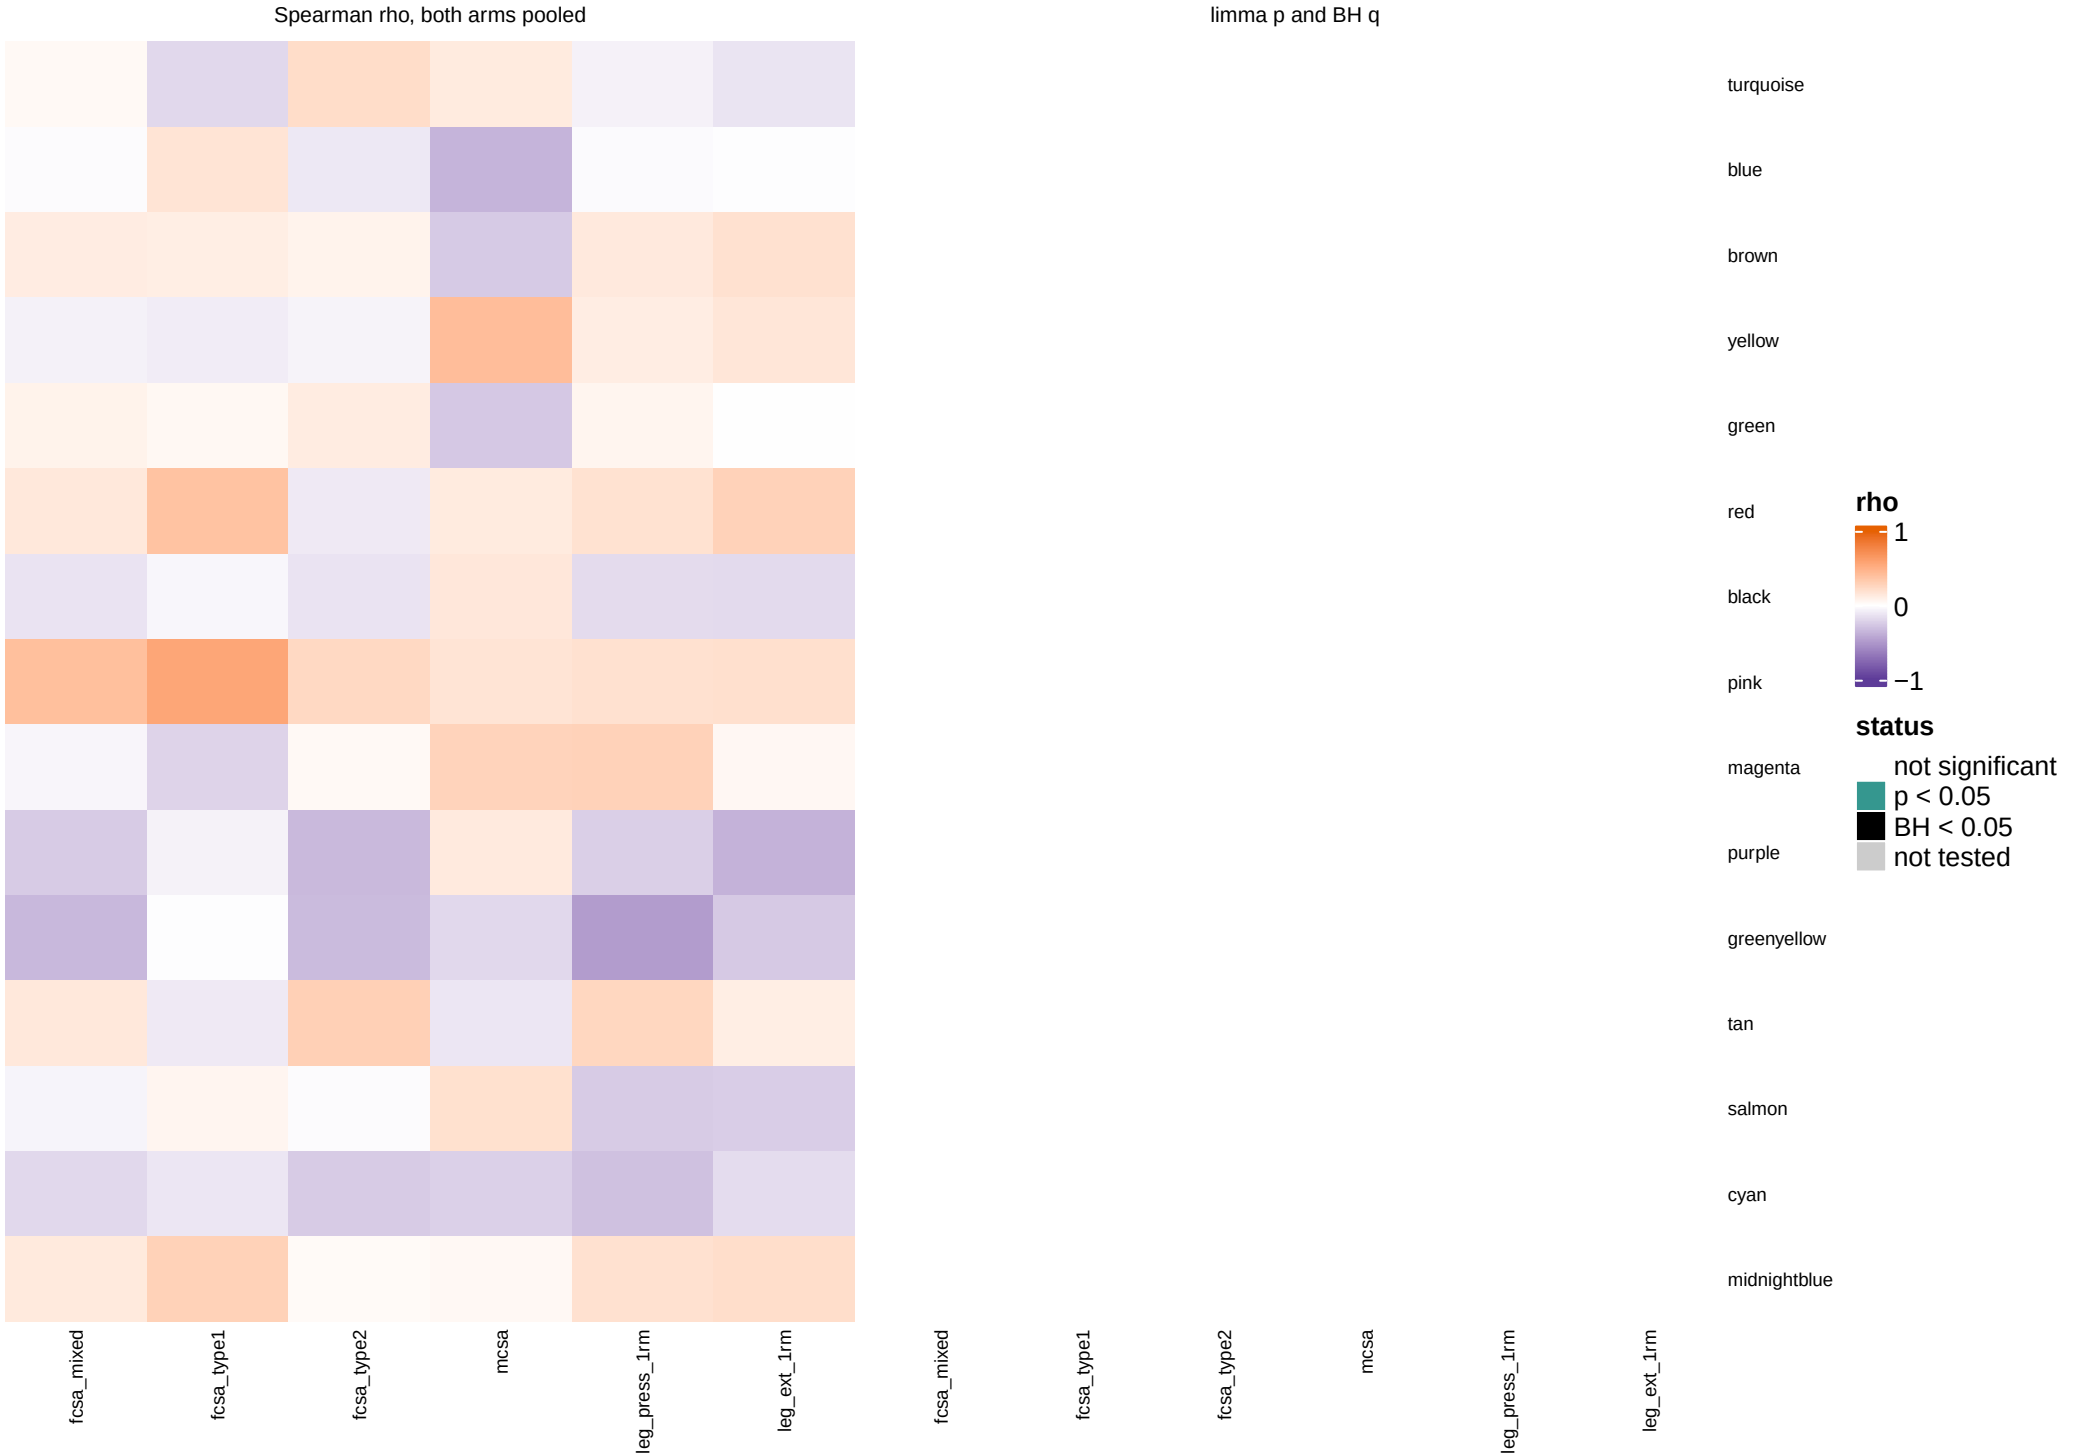

All 15 modules, one row each. Spearman rho between the eigengene (T3 level) and each trait; status from limma. Rows follow module size. Grey: not tested. Table: c_data/module_trait_associations.xlsx, change_score.

mcsa, between−person term


2 of 15 modules at p < 0.05, 2 at BH < 0.05. Page 1 of 1.

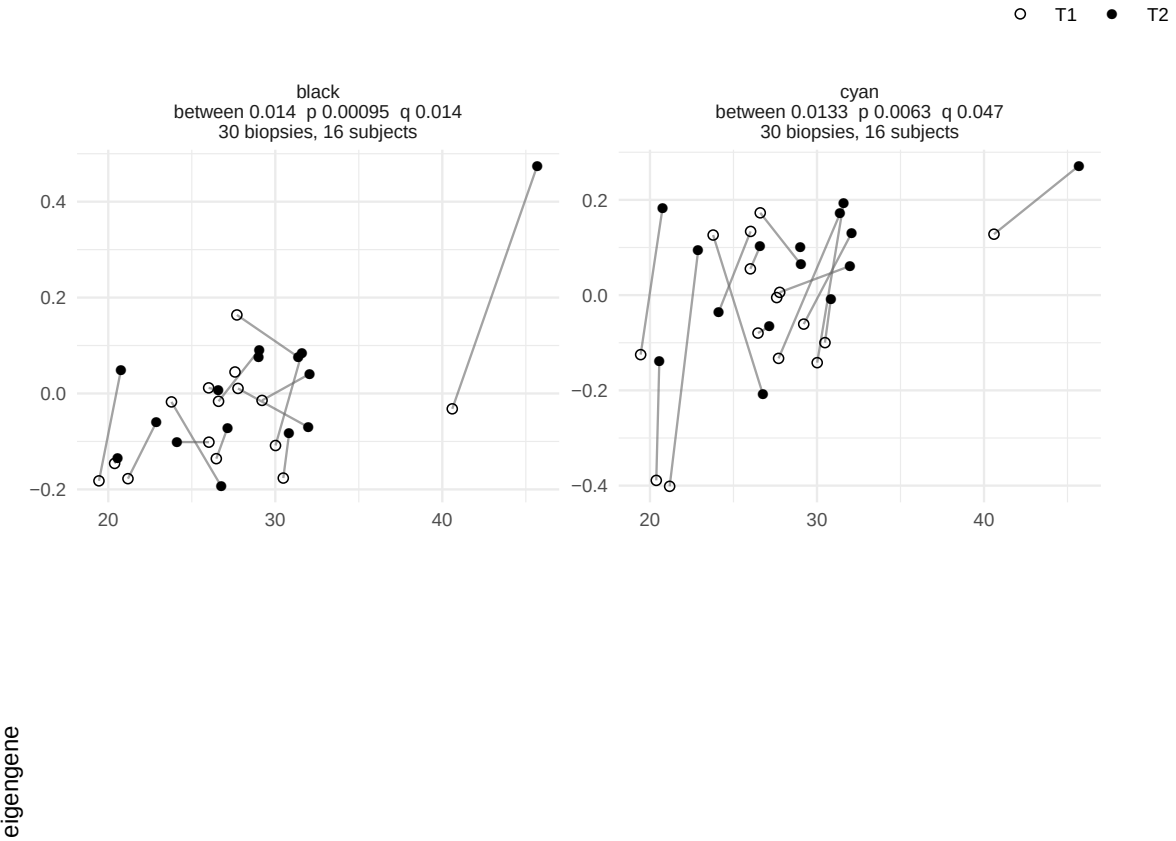

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: slope per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/module_trait_associations.xlsx, model.

leg_press_1rm, between−person term


2 of 15 modules at p < 0.05, 0 at BH < 0.05. Page 1 of 1.

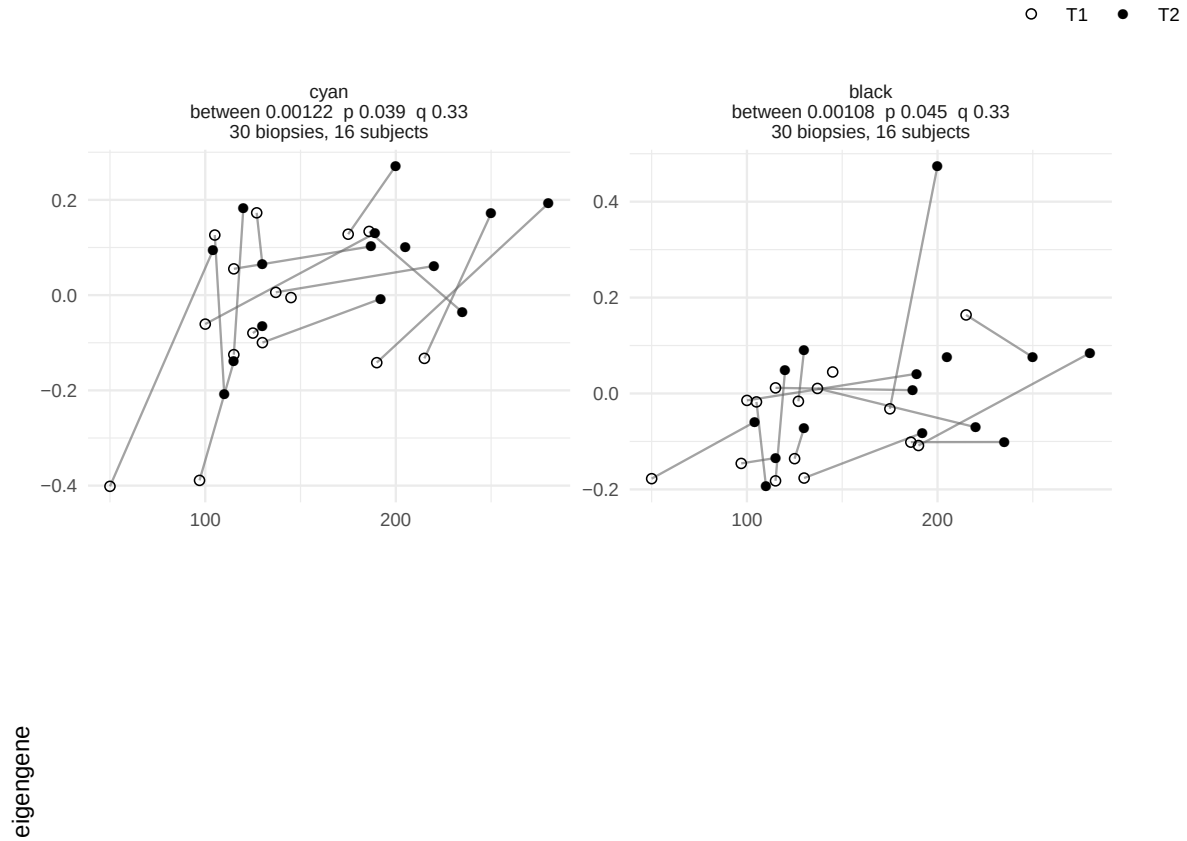

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: slope per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/module_trait_associations.xlsx, model.

leg_ext_1rm, within−person term


1 of 15 modules at p < 0.05, 0 at BH < 0.05. Page 1 of 1.

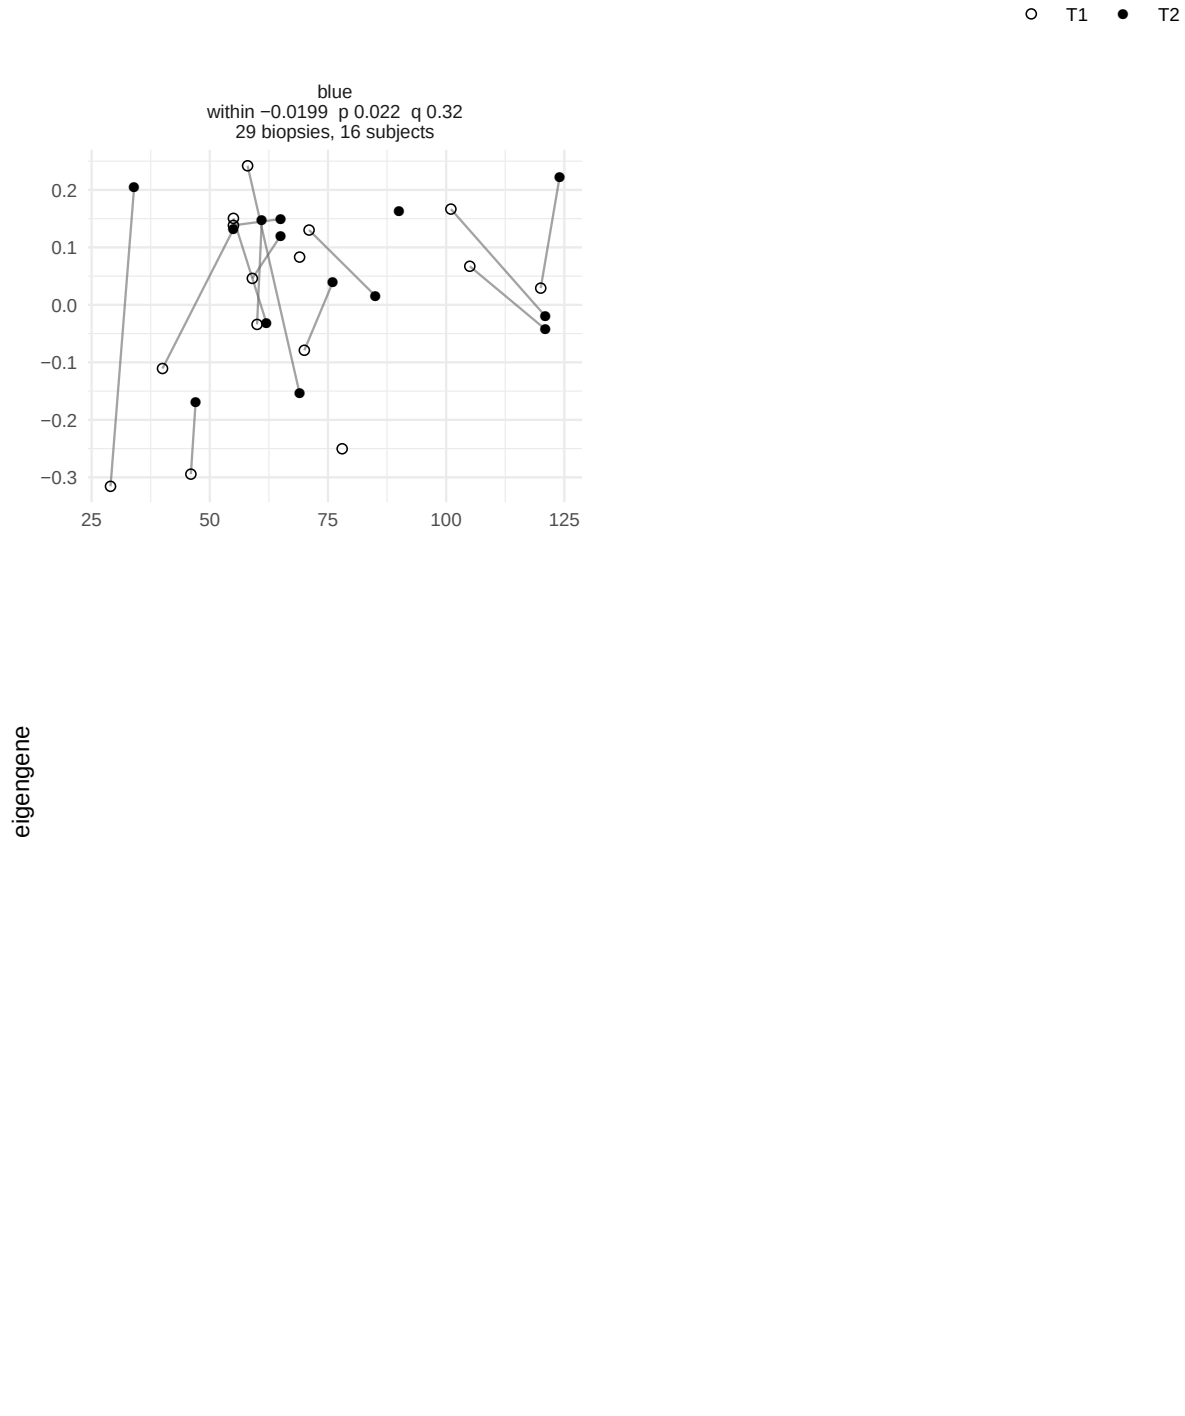

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: slope per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/module_trait_associations.xlsx, model.

leg_ext_1rm, between−person term


1 of 15 modules at p < 0.05, 0 at BH < 0.05. Page 1 of 1.

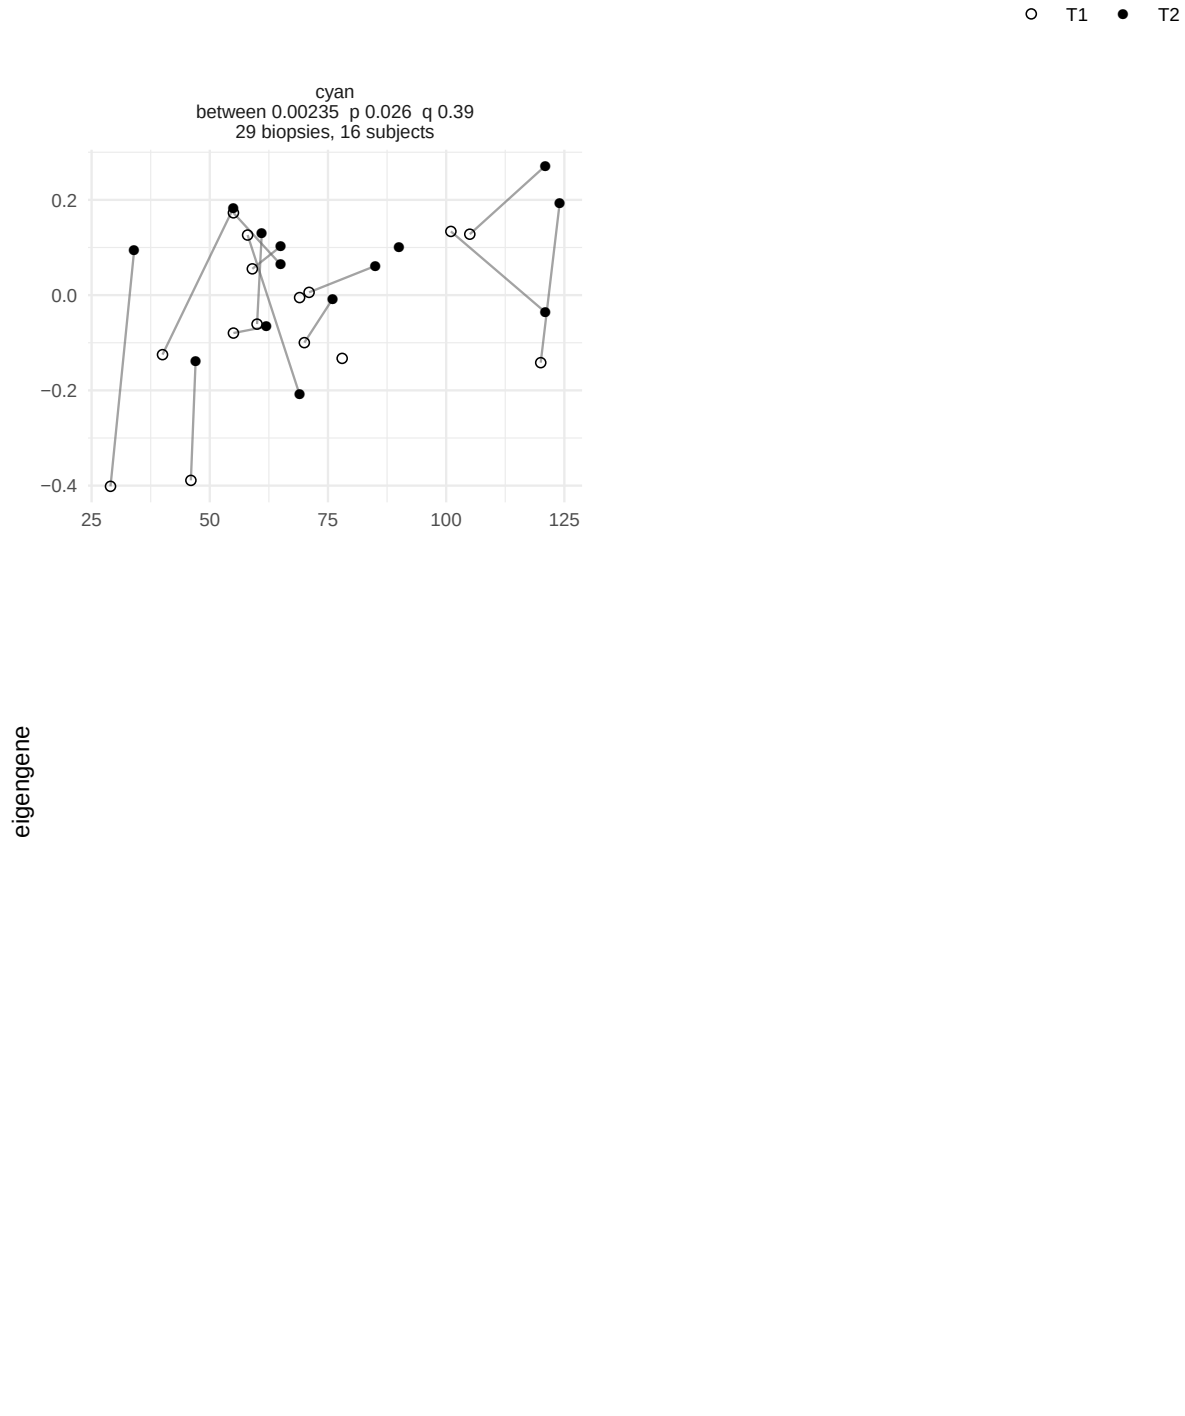

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: slope per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/module_trait_associations.xlsx, model.

Change score, training window


5 of 120 feature−trait pairs at p < 0.05, 0 at BH < 0.05. Page 1 of 1.

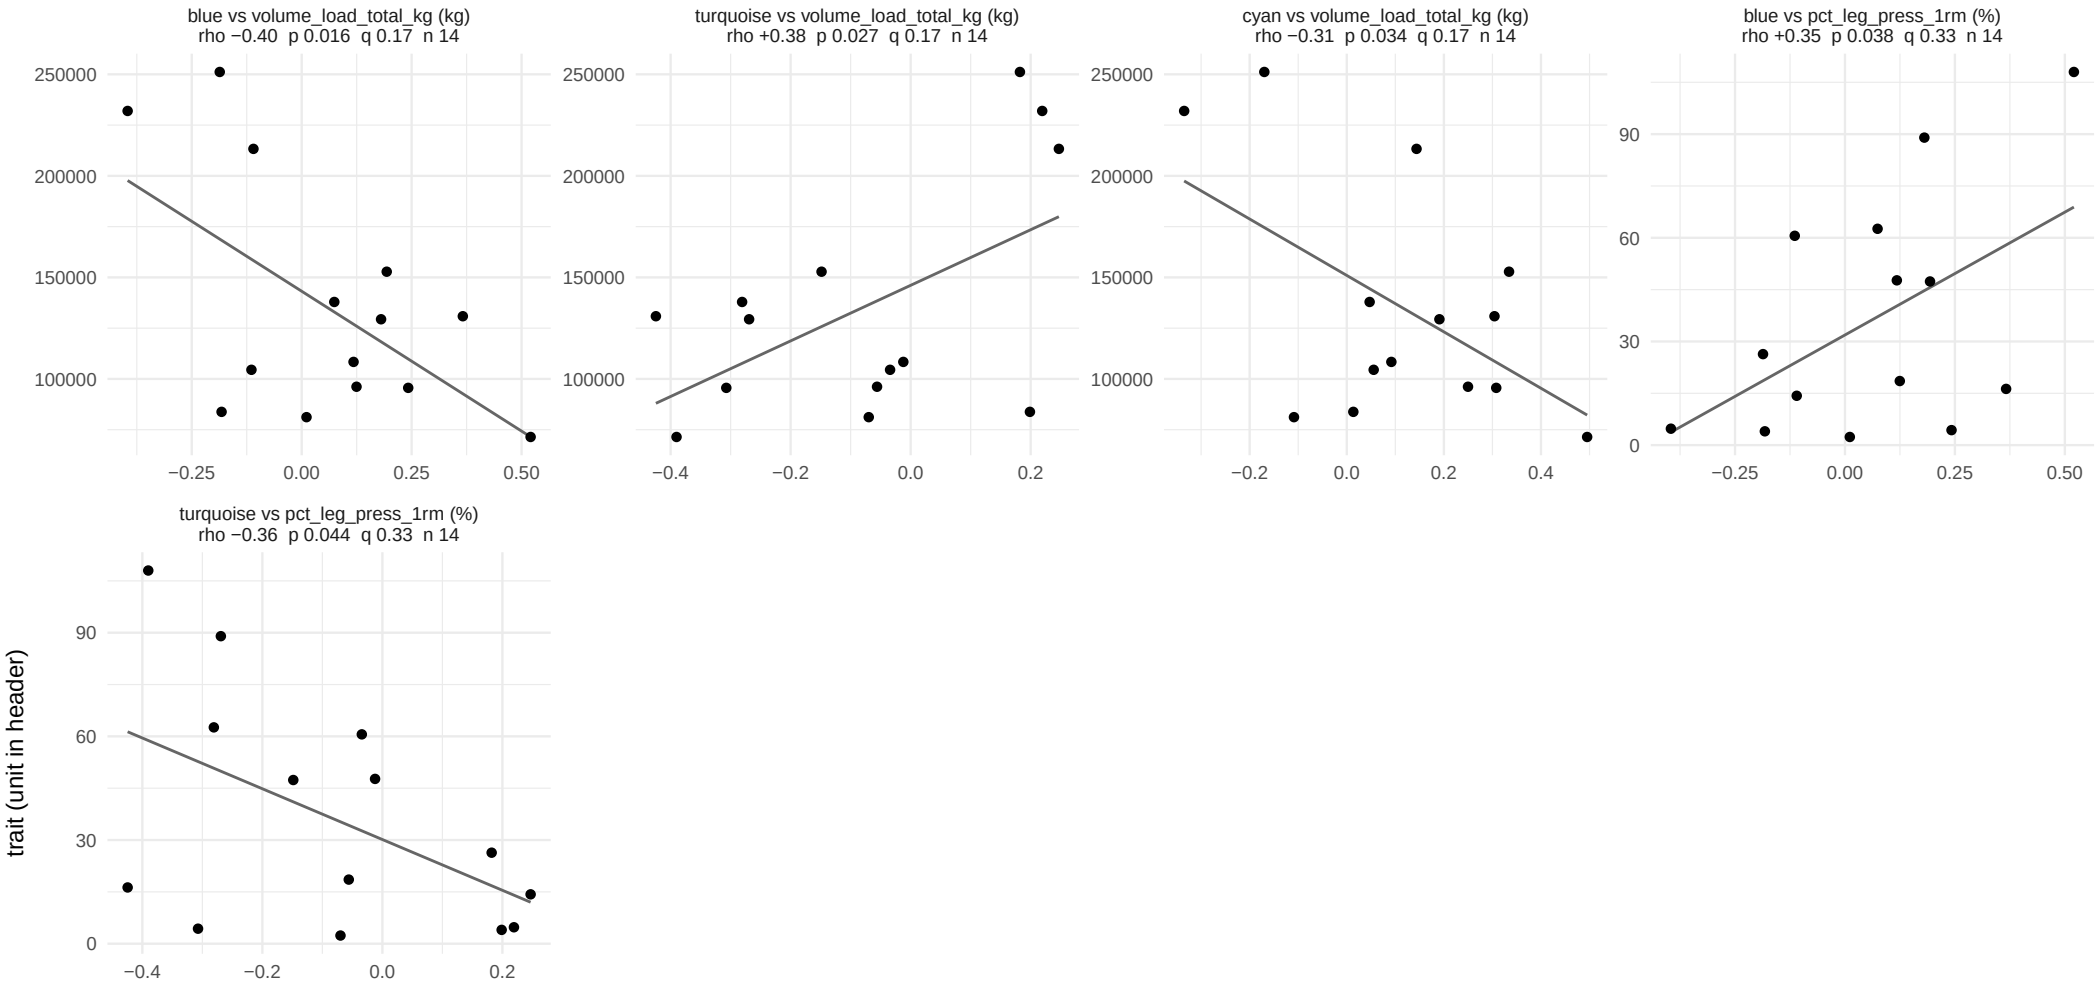

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, trait, with the subjects used. Table: c_data/module_trait_associations.xlsx, change_score.

Change score, baseline window

4 of 120 feature−trait pairs at p < 0.05, 0 at BH < 0.05. Page 1 of 1.

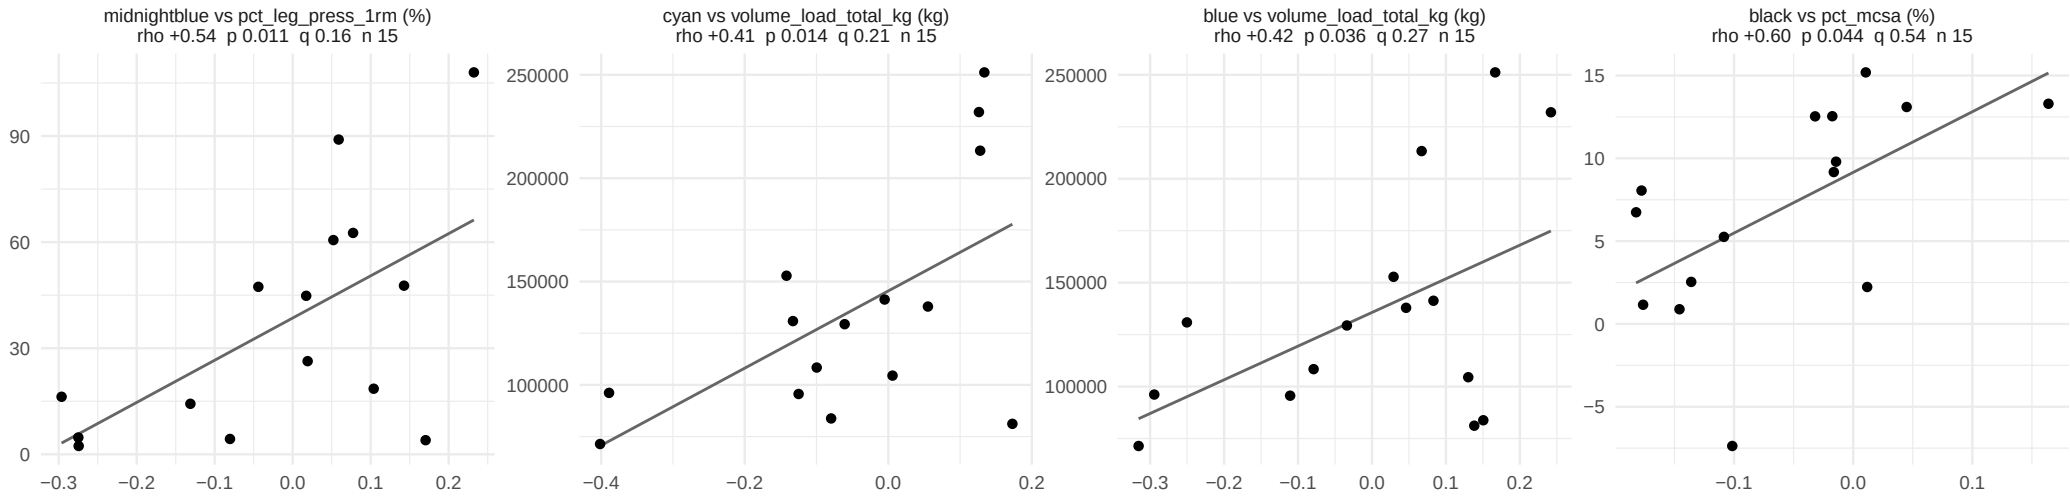


trait (unit in header)

eigengene, T1 level

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, trait, with the subjects used. Table: c_data/module_trait_associations.xlsx, change_score.

Change score, acute window


7 of 120 feature−trait pairs at p < 0.05, 0 at BH < 0.05. Page 1 of 1.

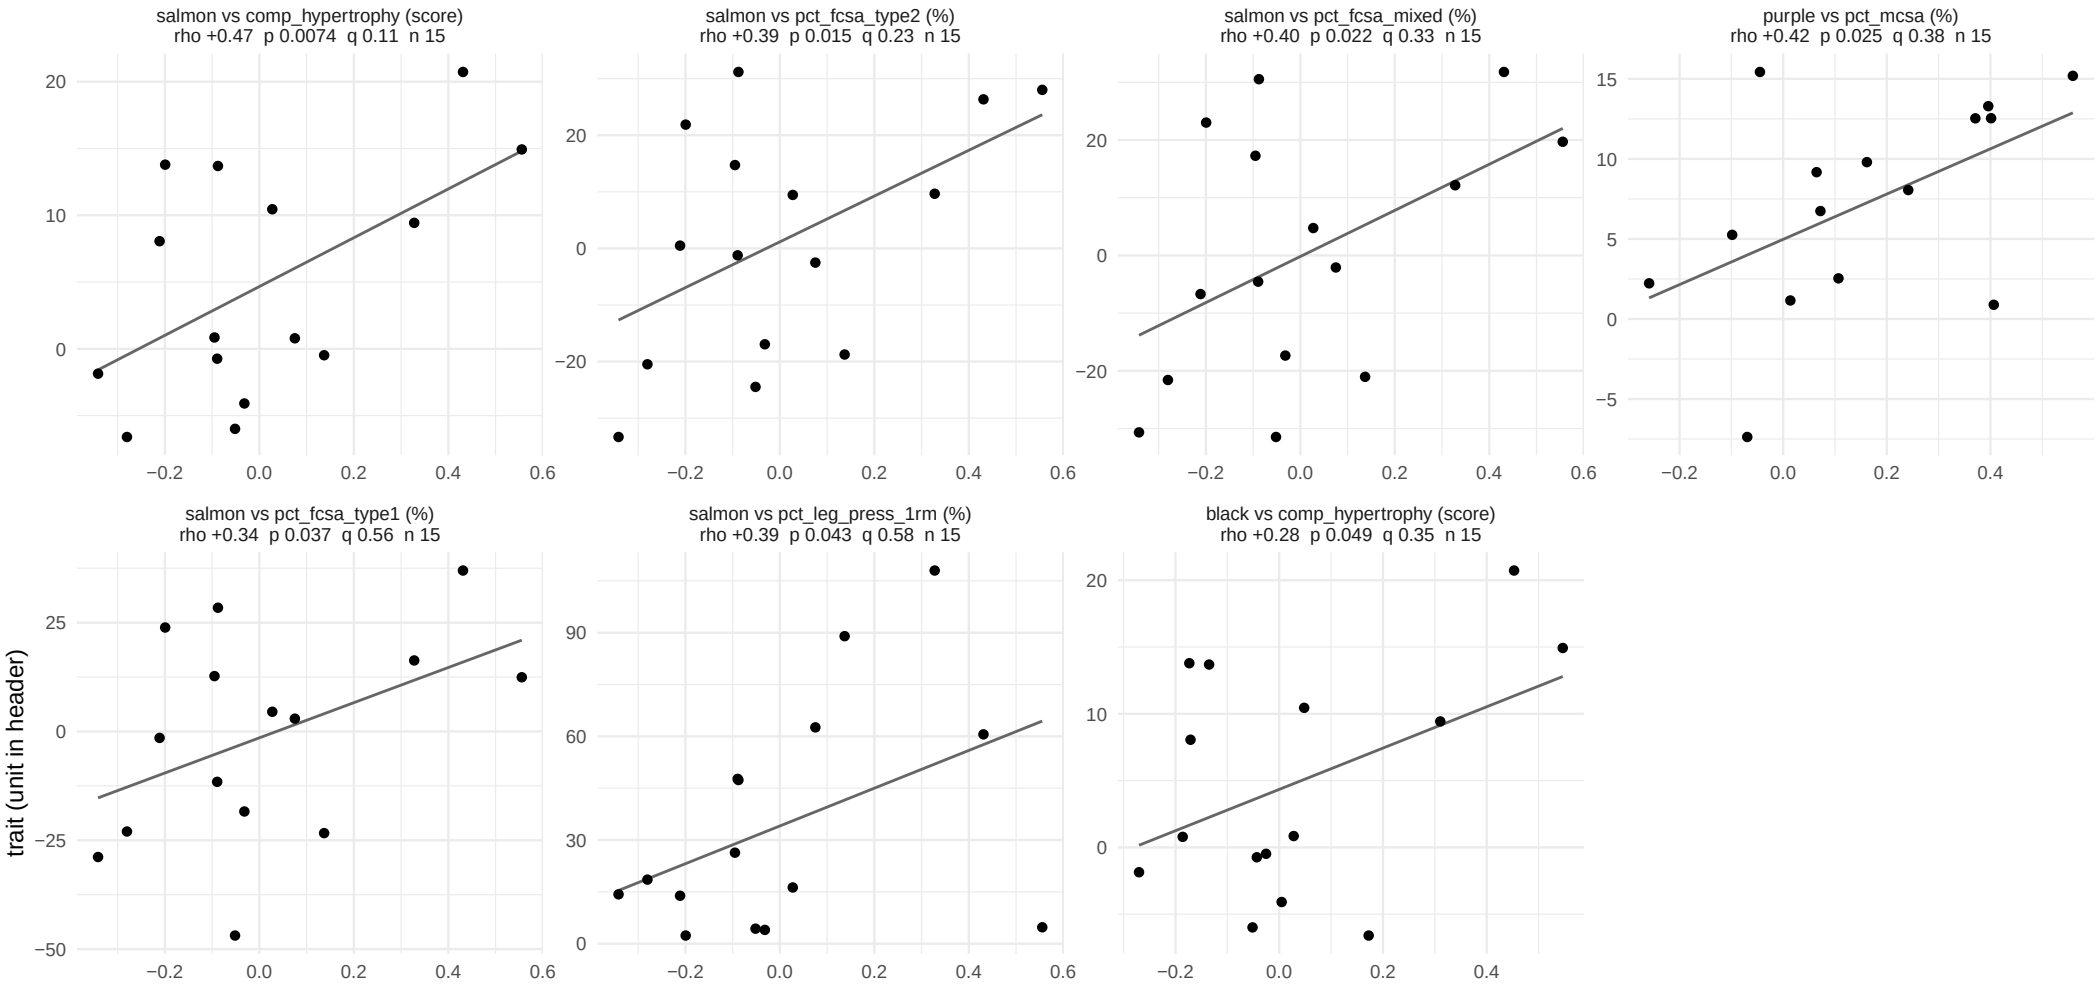

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, trait, with the subjects used. Table: c_data/module_trait_associations.xlsx, change_score.

Change score, post_level window


5 of 90 feature−trait pairs at p < 0.05, 2 at BH < 0.05. Page 1 of 1.

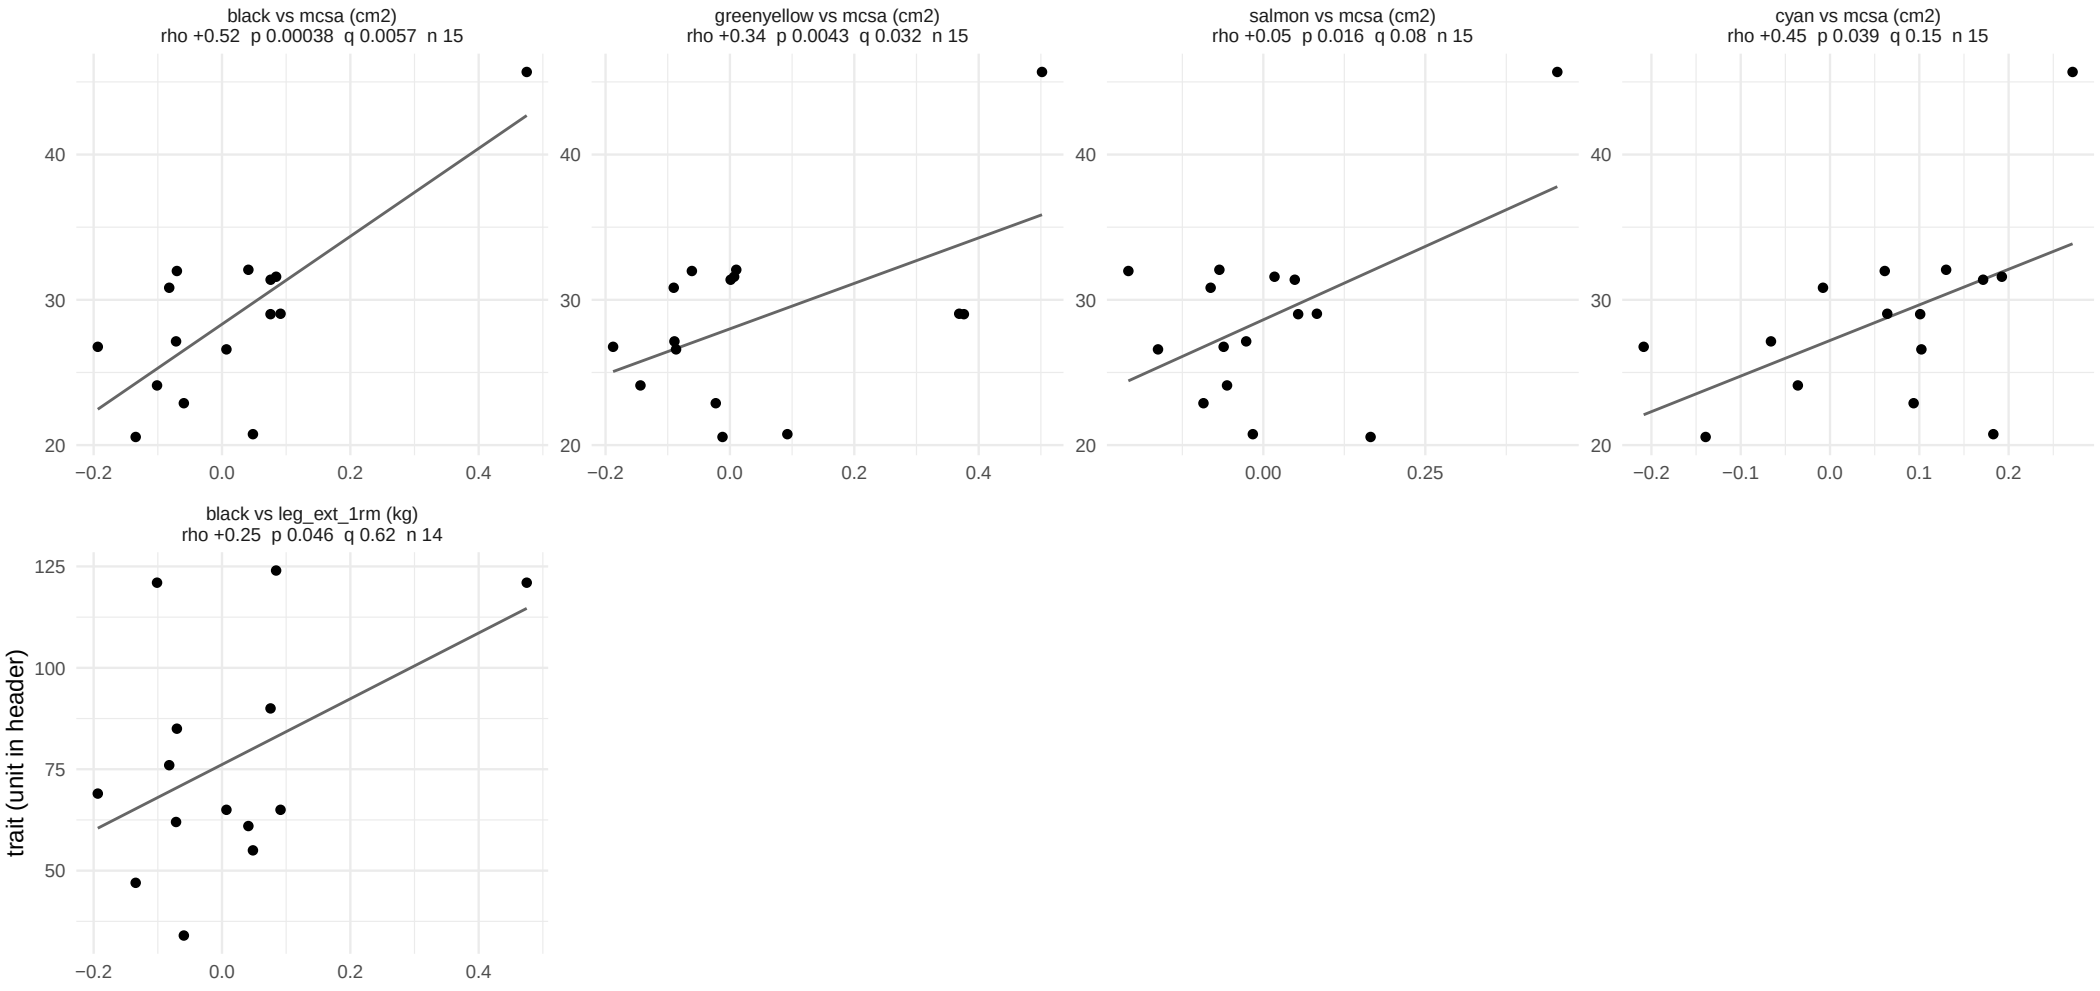

One point per subject, every subject pooled. The line is a least−squares fit, drawn as a guide. Header: Spearman rho, and limma p and BH q within window, trait, with the subjects used. Table: c_data/module_trait_associations.xlsx, change_score.

Two predictor, training window


2 of 60 feature−trait pairs at p < 0.05, 0 at BH < 0.05. Page 1 of 1.

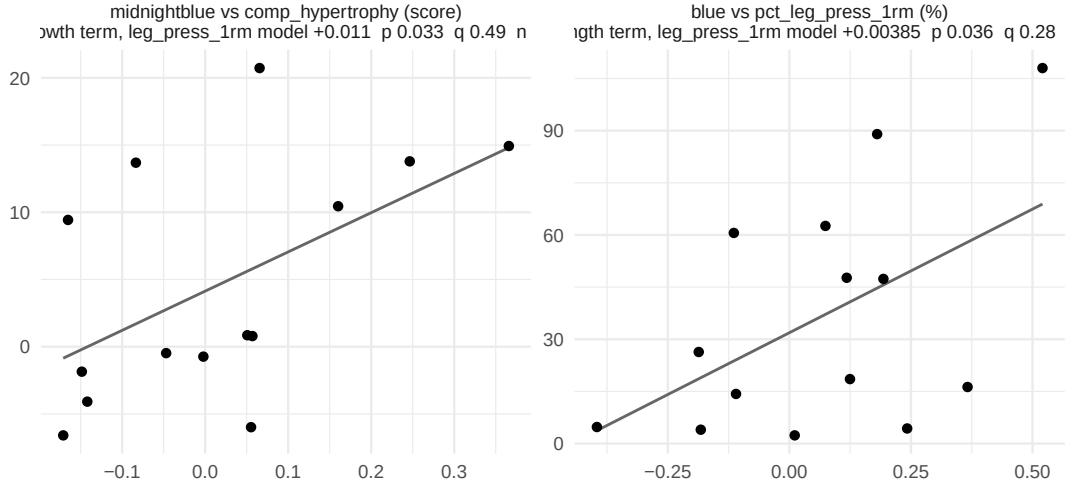

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own trait; the drawing does not hold the other predictor fixed. Table: c_data/module_trait_associations.xlsx, two_predictor.

Two predictor, baseline window


2 of 60 feature−trait pairs at p < 0.05, 1 at BH < 0.05. Page 1 of 1.

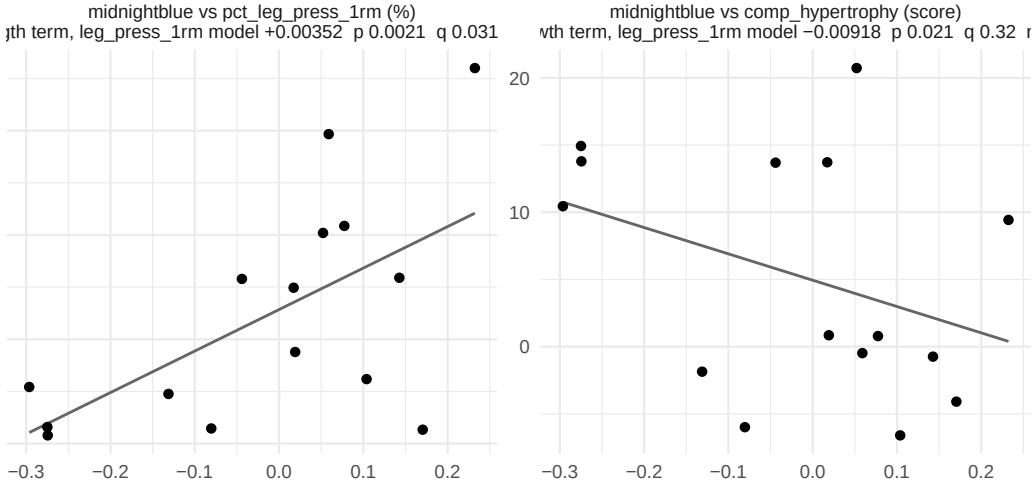

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own trait; the drawing does not hold the other predictor fixed. Table: c_data/module_trait_associations.xlsx, two_predictor.

Two predictor, acute window

2 of 60 feature−trait pairs at p < 0.05, 0 at BH < 0.05. Page 1 of 1.

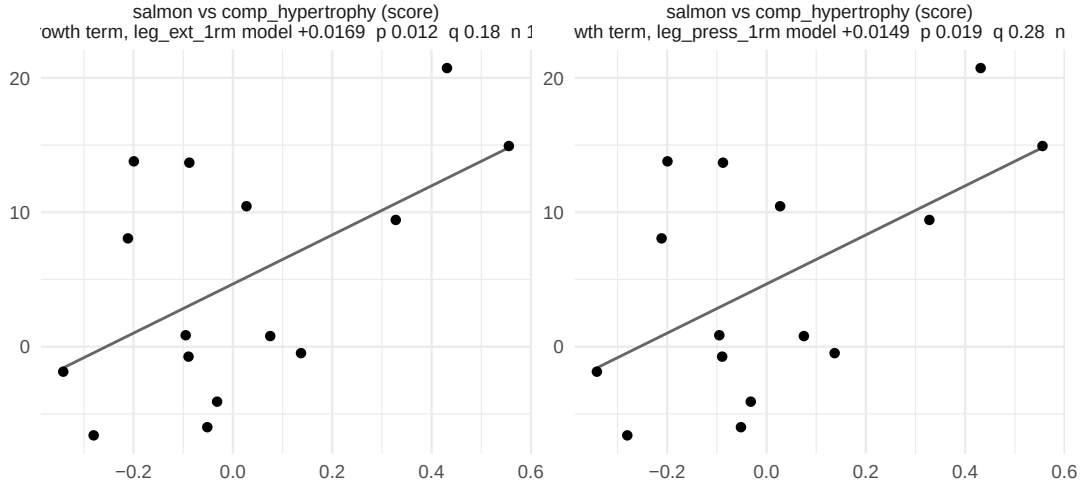

trait (unit in header)

eigengene, change, T2 to T3

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own trait; the drawing does not hold the other predictor fixed. Table: c_data/module_trait_associations.xlsx, two_predictor.