

Sample model overview: proteins

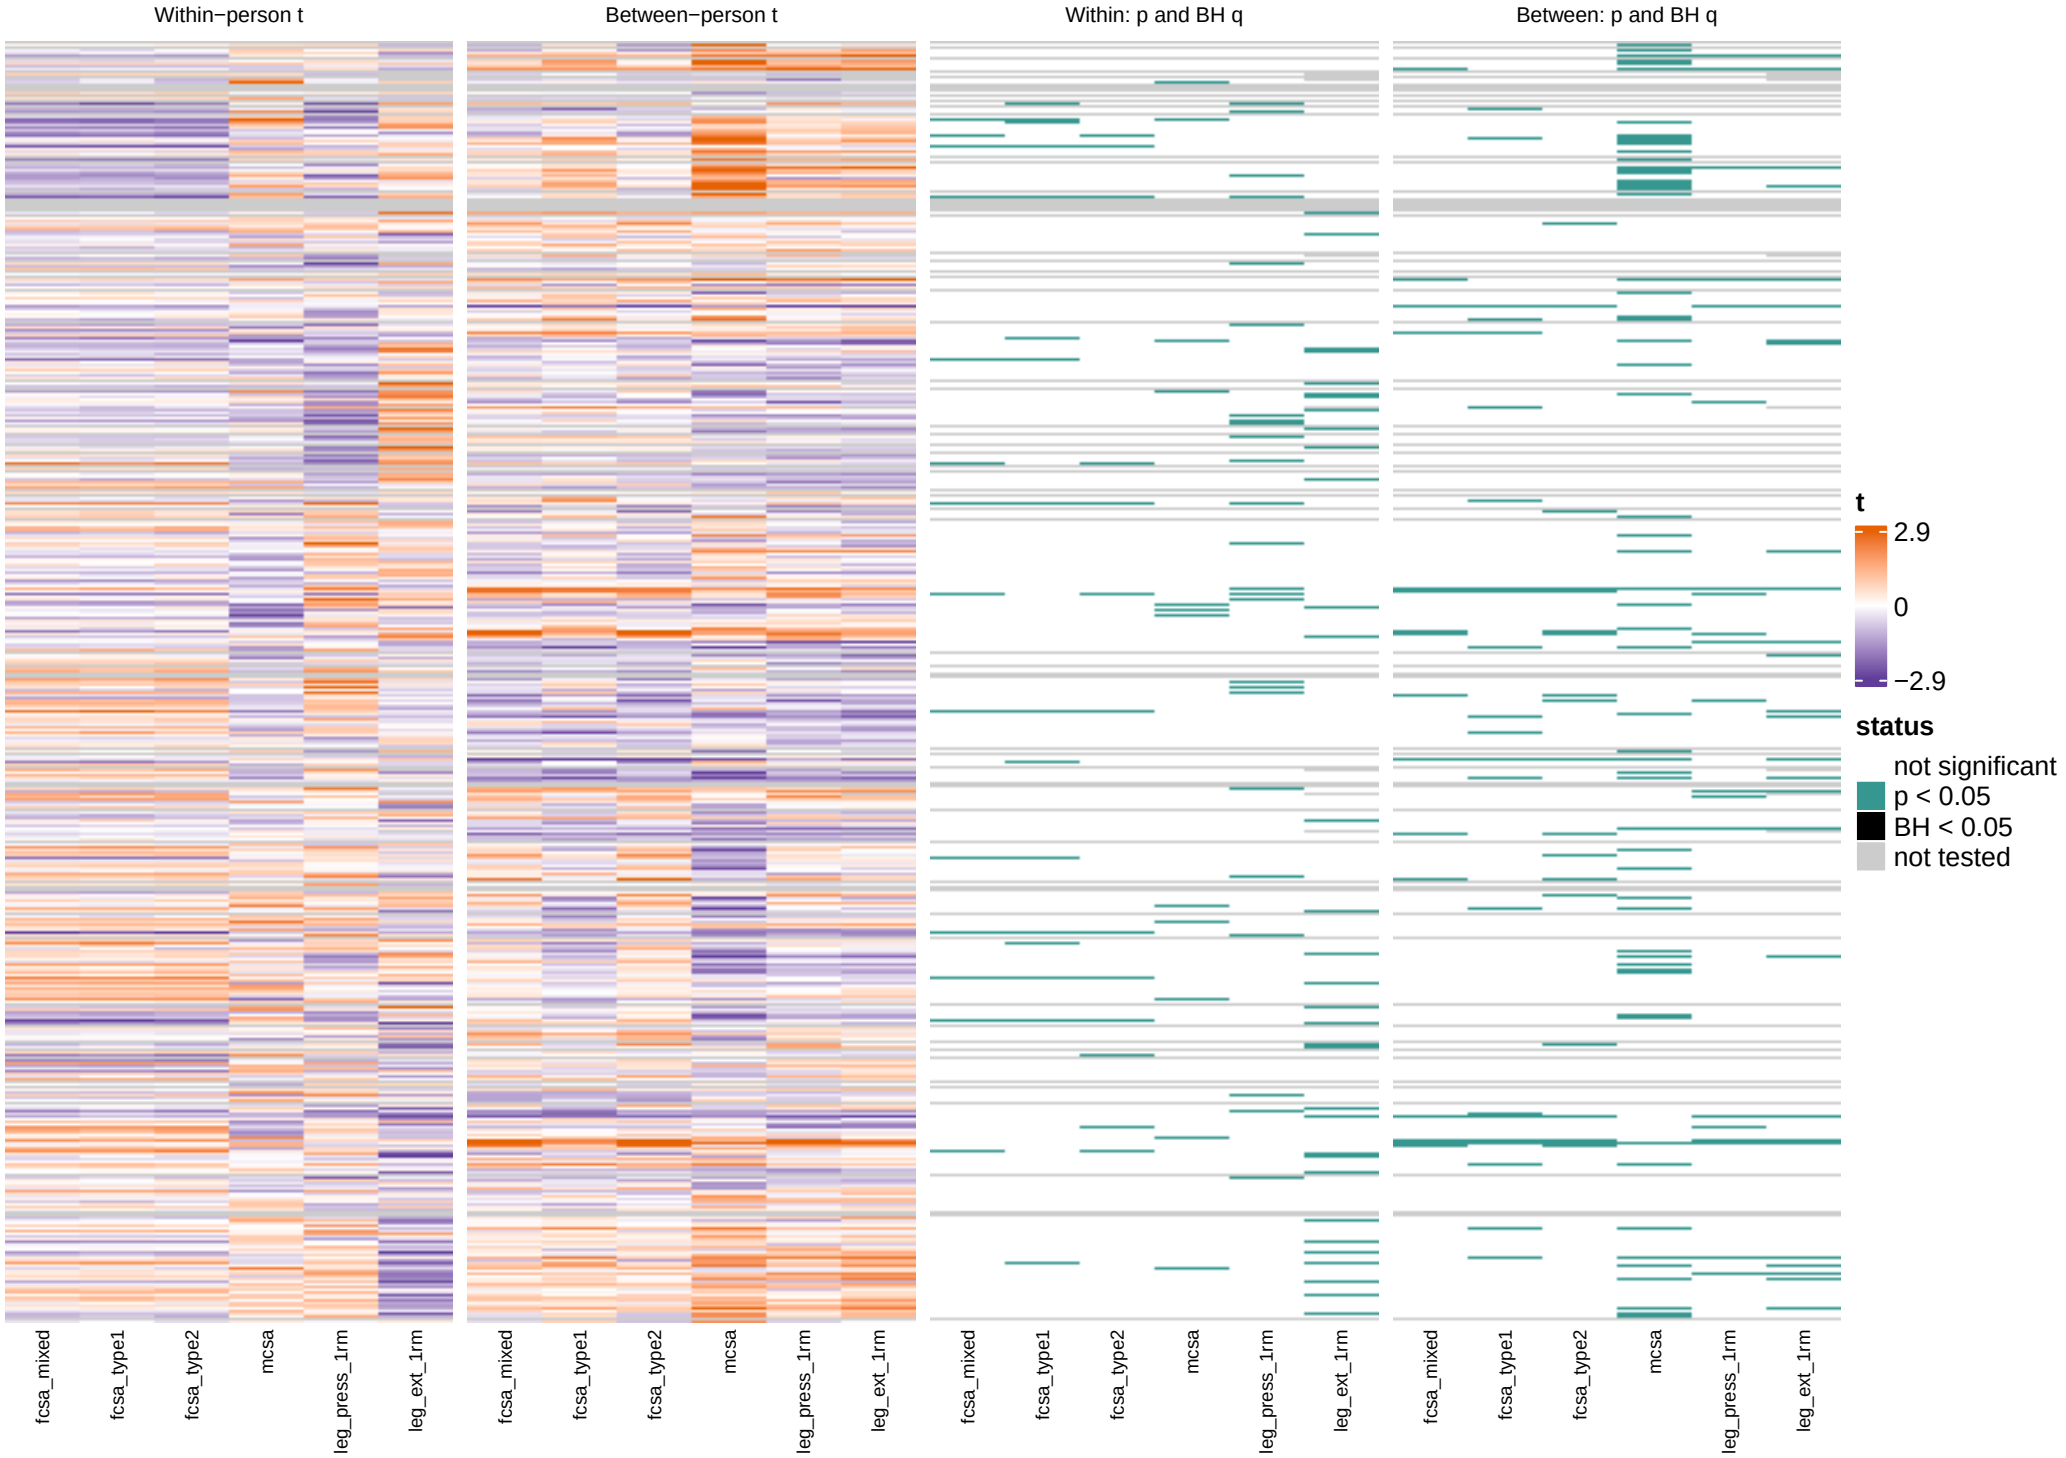


All 1,900 proteins, one row each. Moderated t of the within and between terms, abundance ~ timepoint + between + within, subject blocked. Colours stop at the 99th percentile of |t|, 2.9.
Rows are ordered by average−linkage clustering (1 − Pearson r) of the imputed matrix, for display only. Grey: not tested. Table: c_data/04_associate.xlsx, model.

Change score overview, training window: proteins

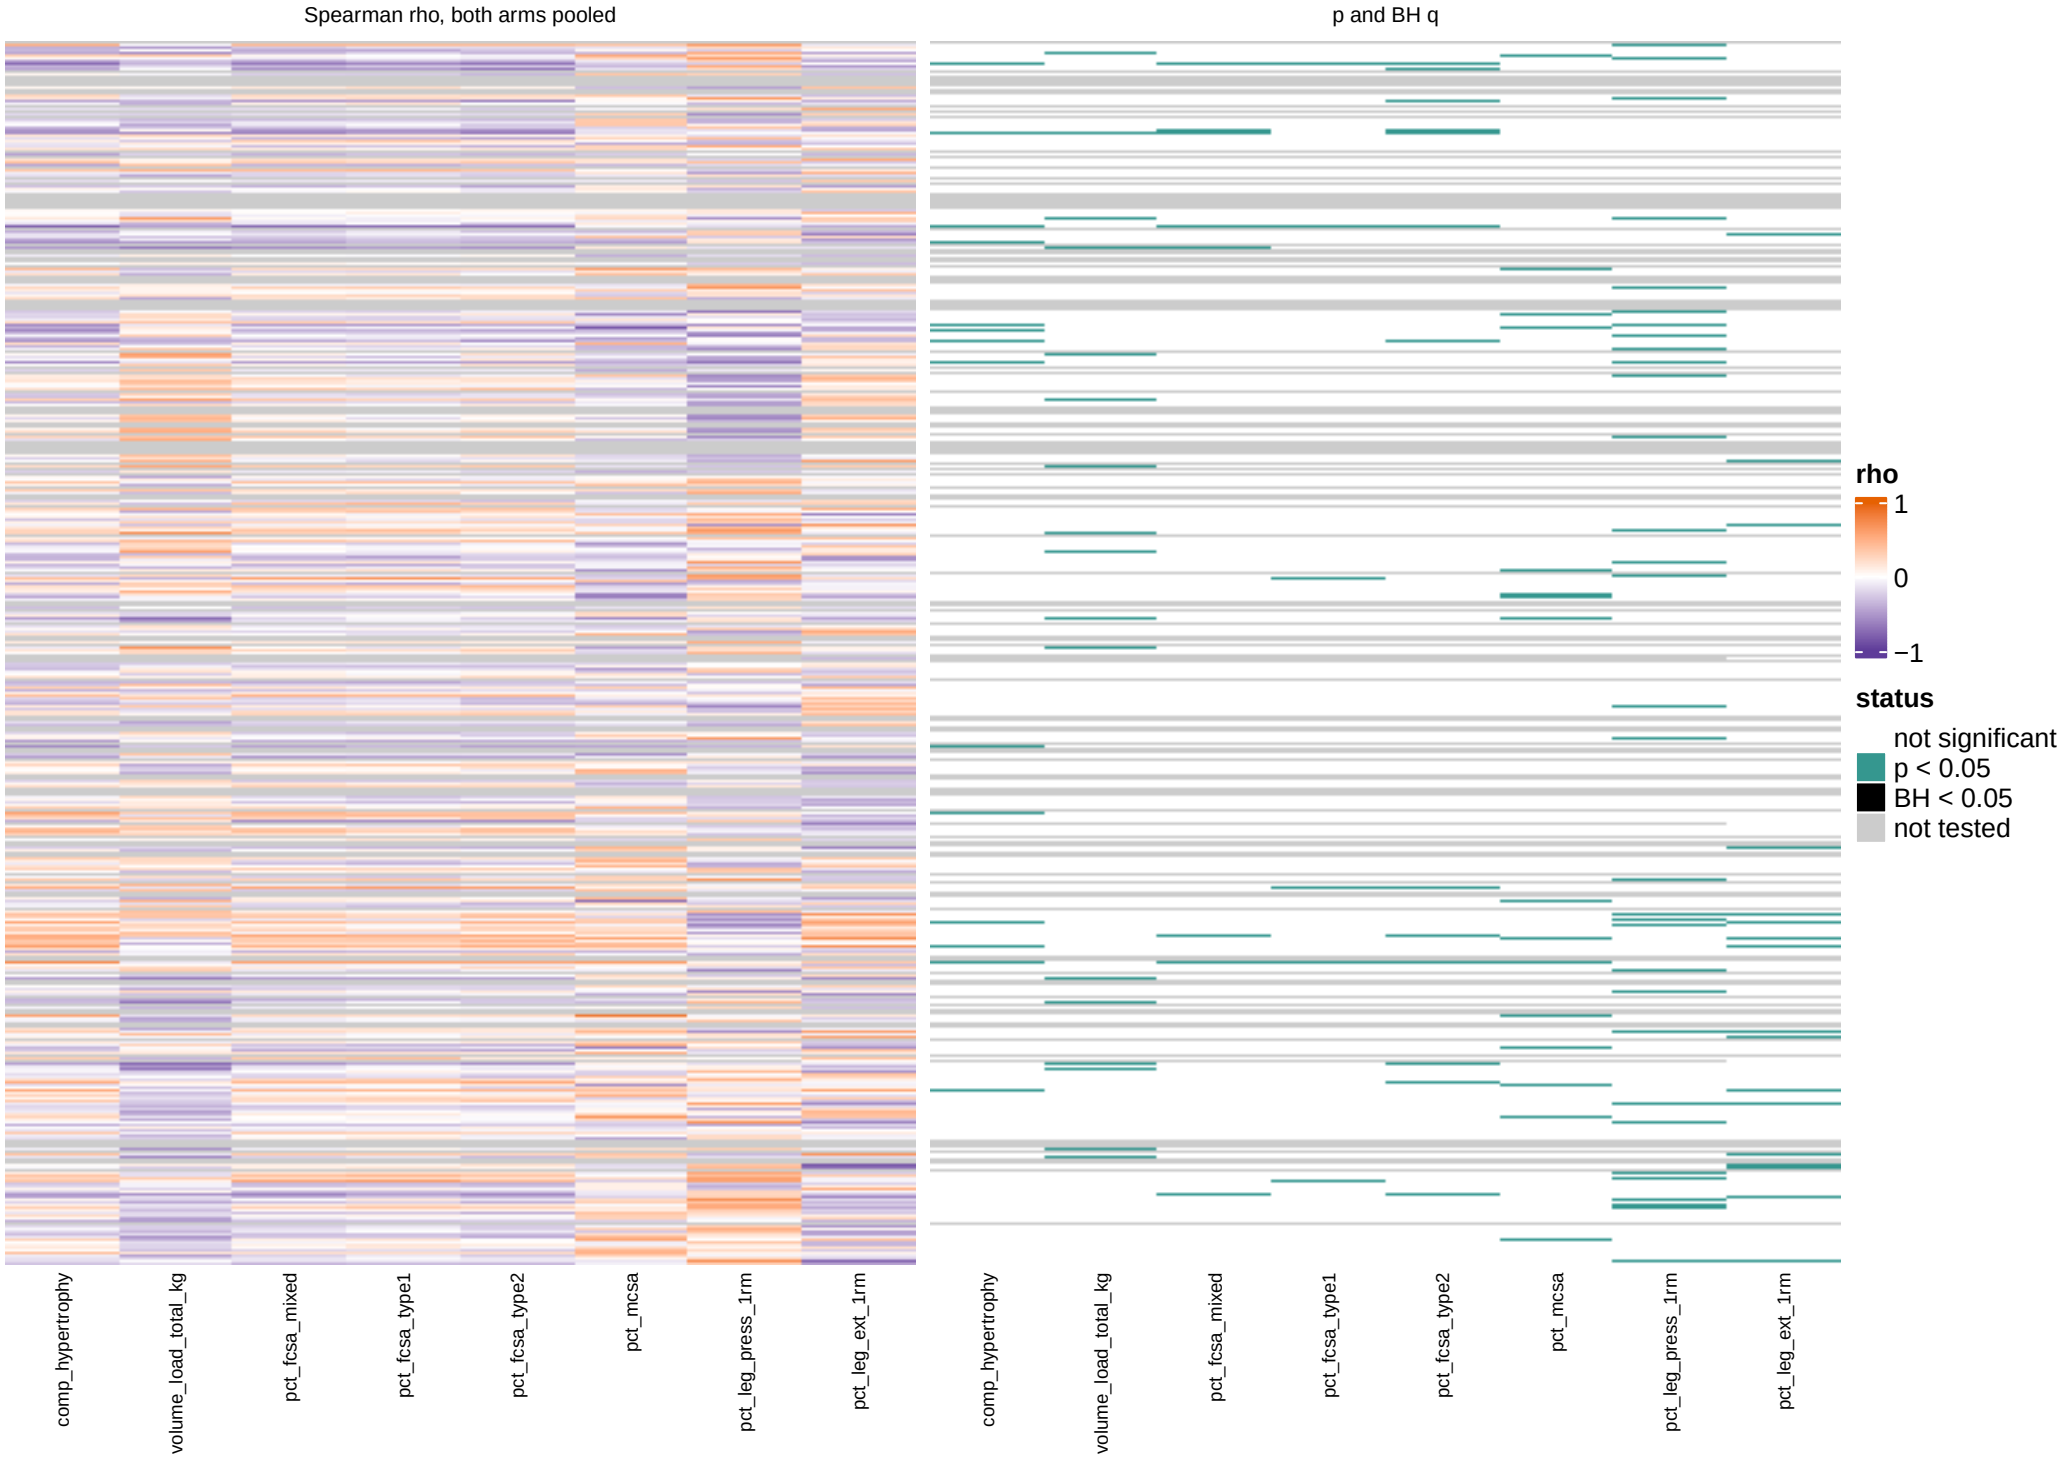


All 1,900 proteins, one row each. Spearman rho between the log2 abundance (change, T1 to T2) and each outcome. Rows are ordered by average−linkage clustering (1 − Pearson r) of the imputed matrix, for display only. Grey: not tested. Table: c_data/04_associate.xlsx, change_score.

Change score overview, baseline window: proteins

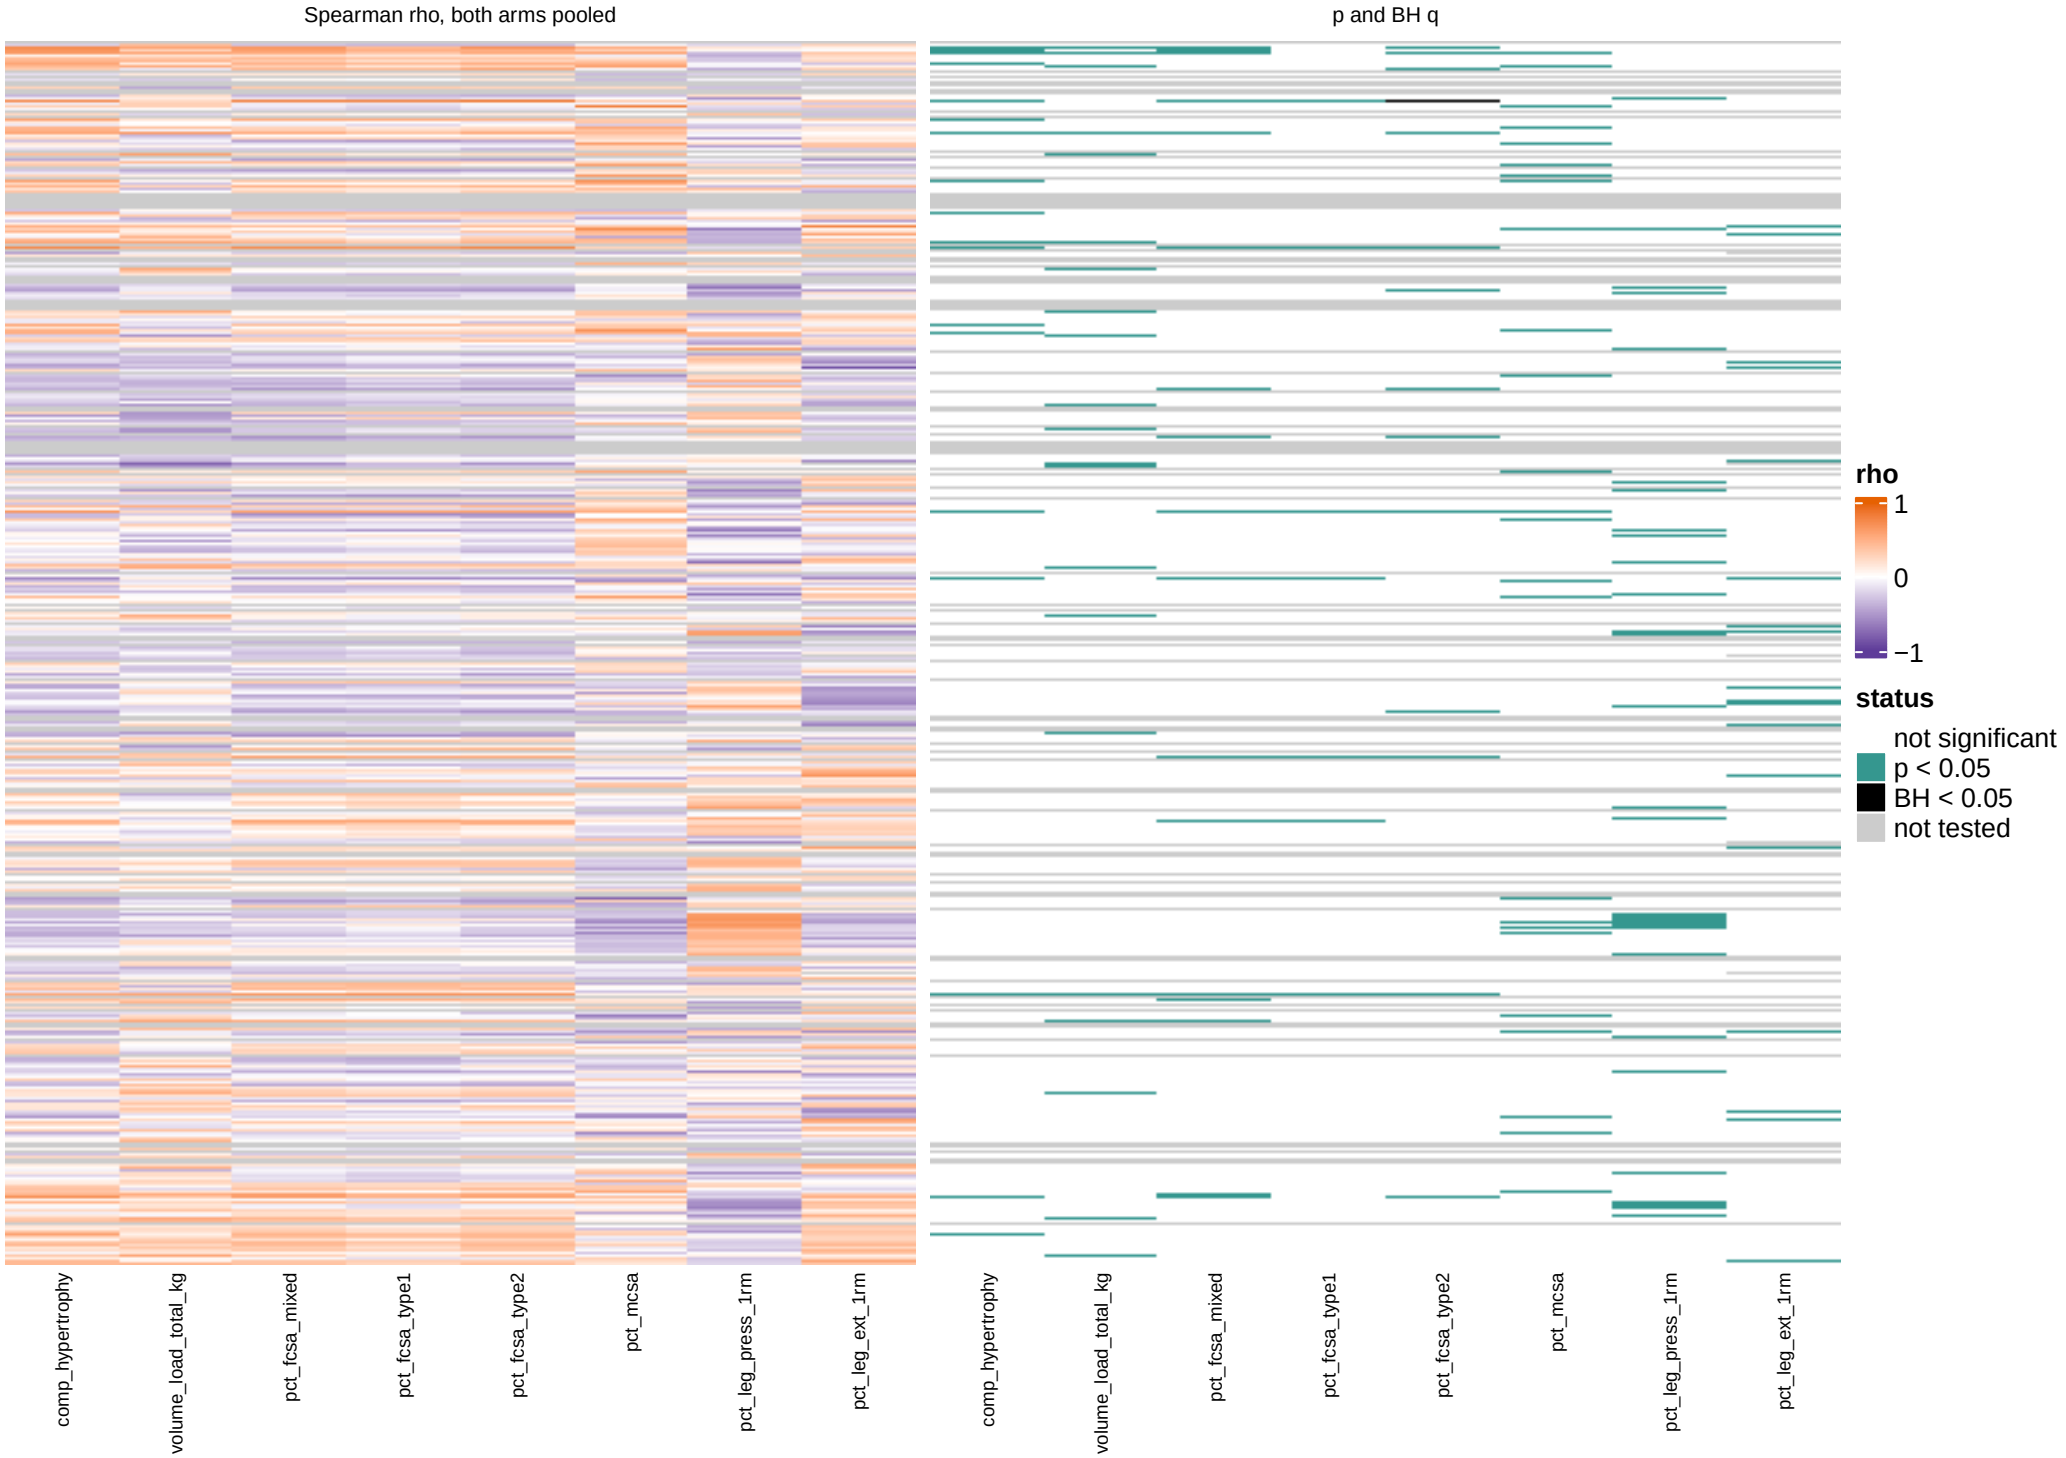

All 1,900 proteins, one row each. Spearman rho between the log2 abundance (T1 level) and each outcome. Rows are ordered by average−linkage clustering (1 − Pearson r) of the imputed matrix, for display only. Grey: not tested. Table: c_data/04_associate.xlsx, change_score.


Change score overview, acute window: proteins

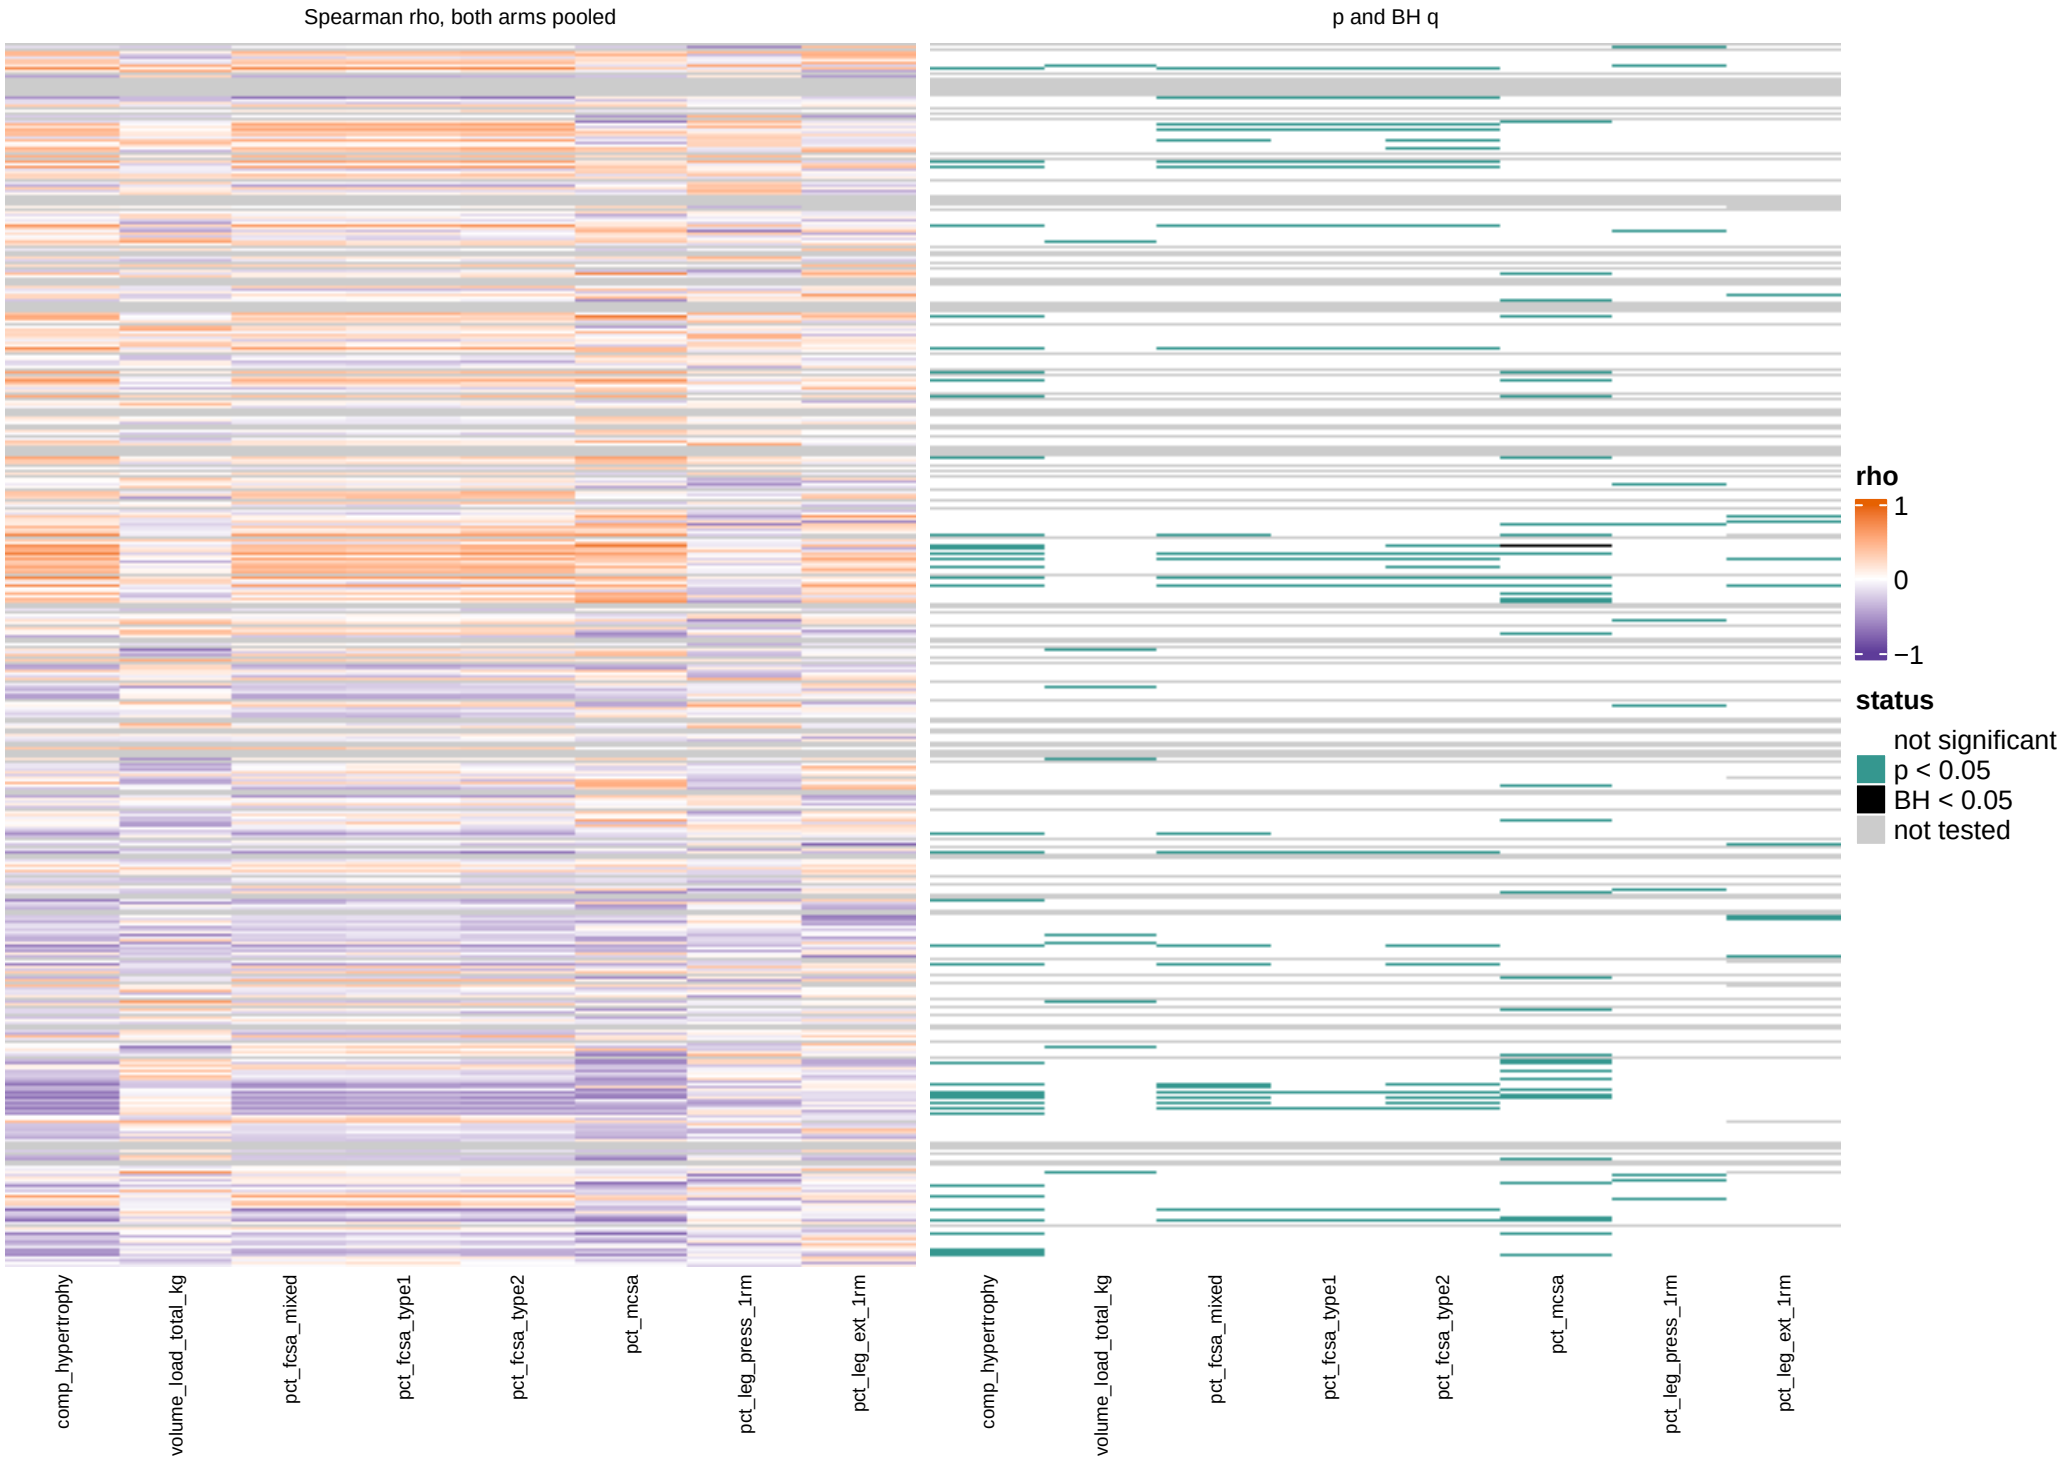

All 1,900 proteins, one row each. Spearman rho between the log2 abundance (change, T2 to T3) and each outcome. Rows are ordered by average−linkage clustering (1 − Pearson r) of the imputed matrix, for display only. Grey: not tested. Table: c_data/04_associate.xlsx, change_score.

fcsa_mixed, within−person term


62 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 1 of 6.

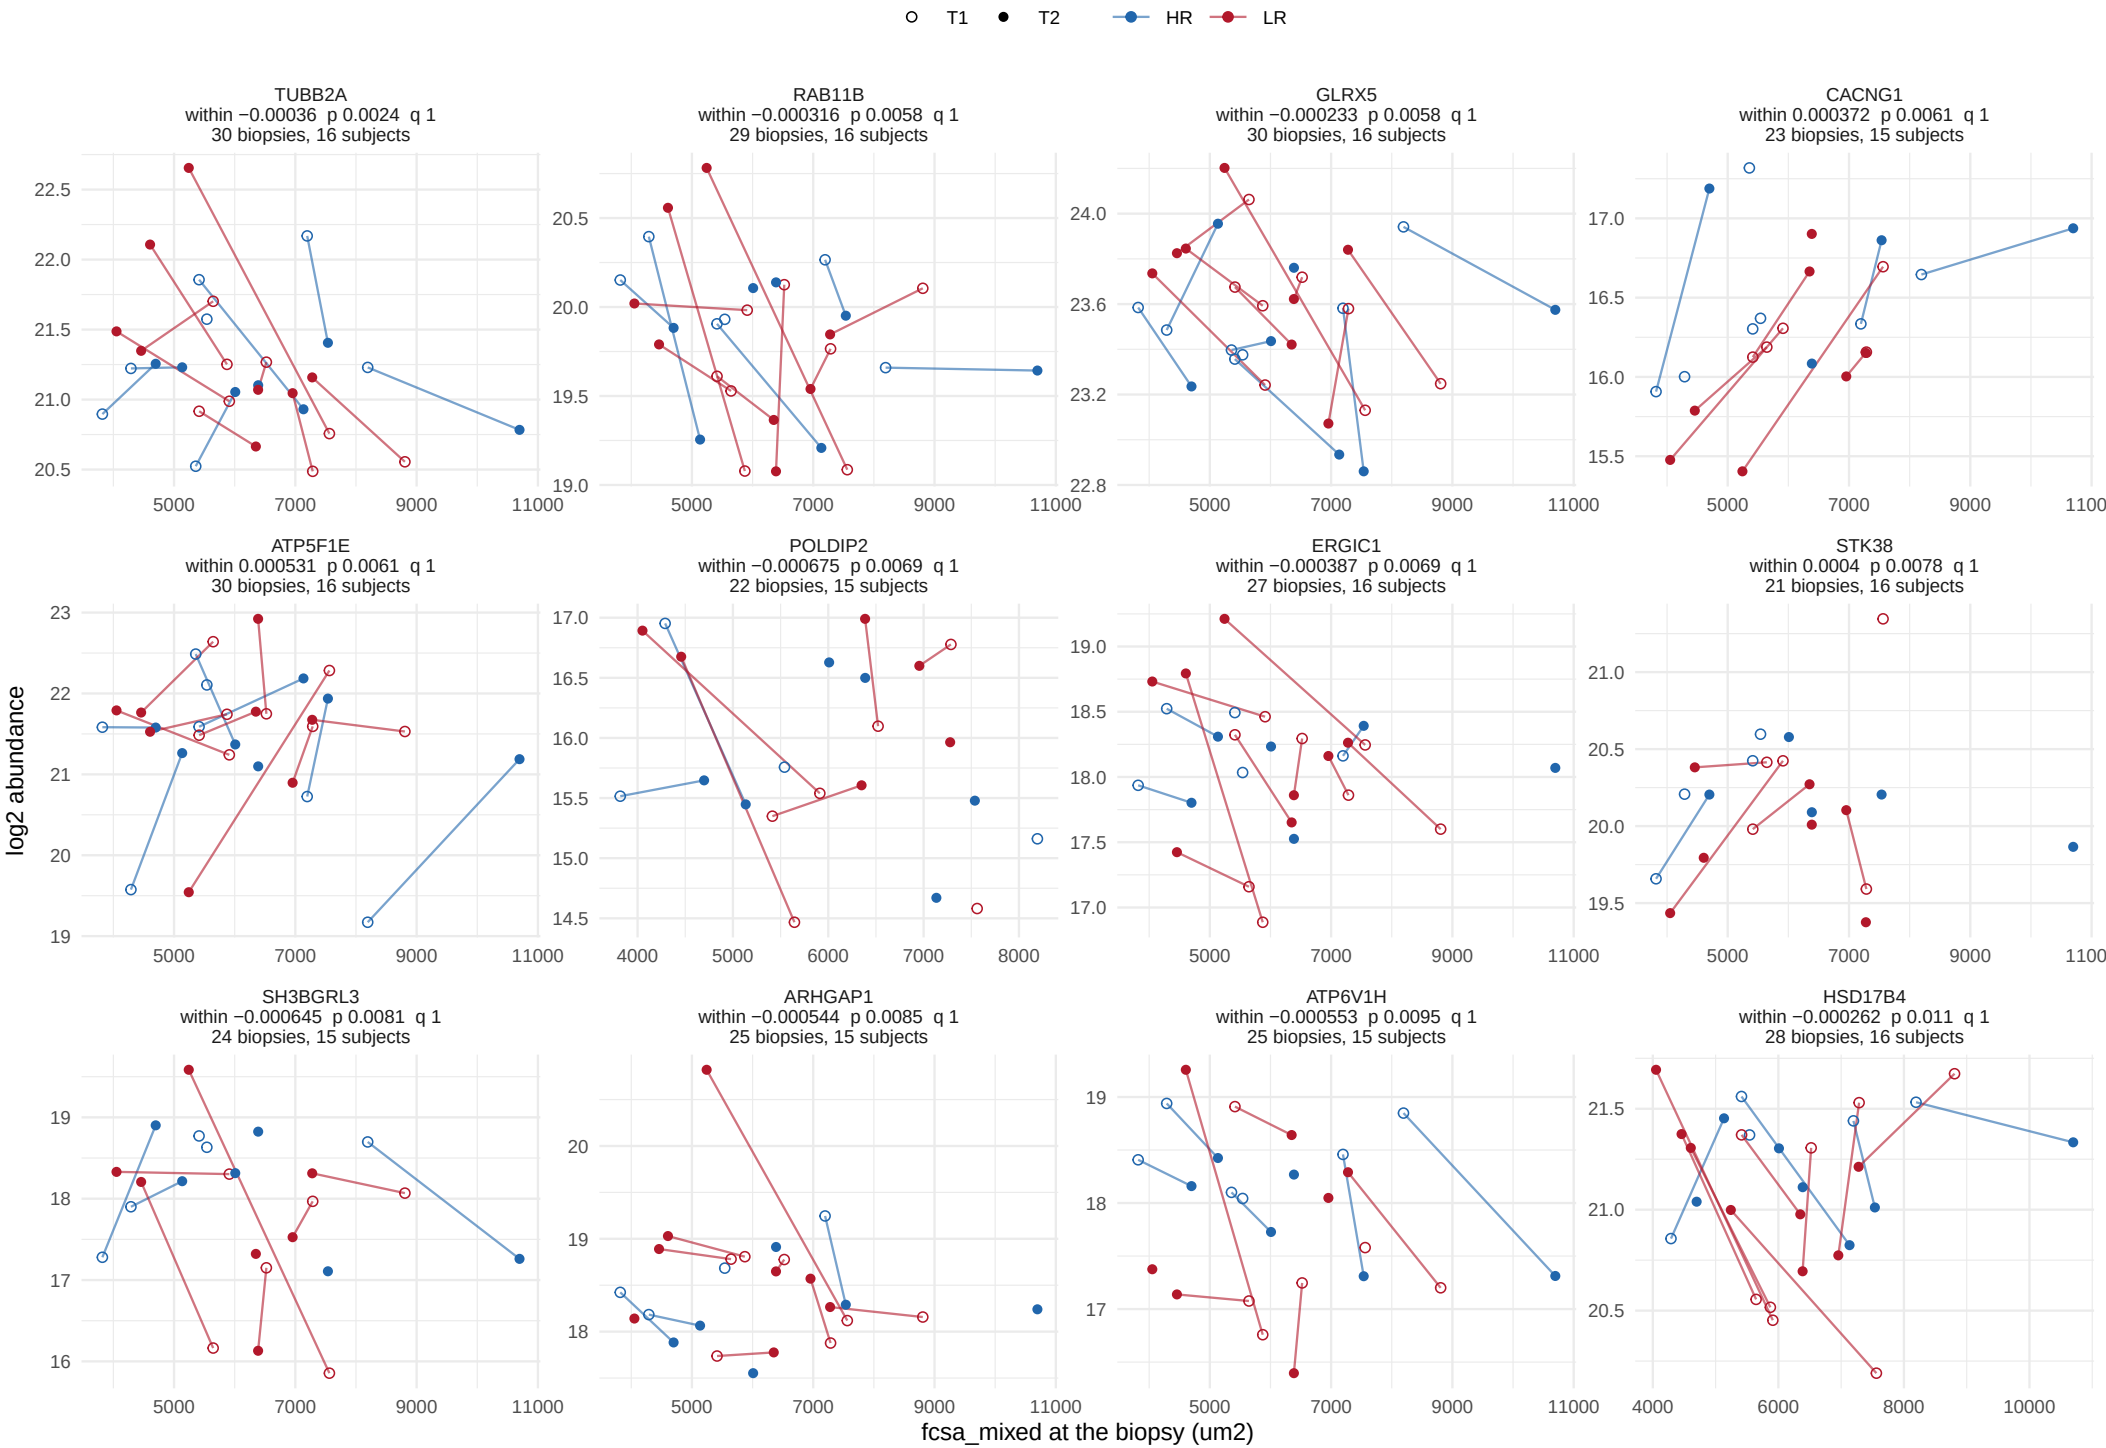

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_mixed, within−person term


62 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 2 of 6.

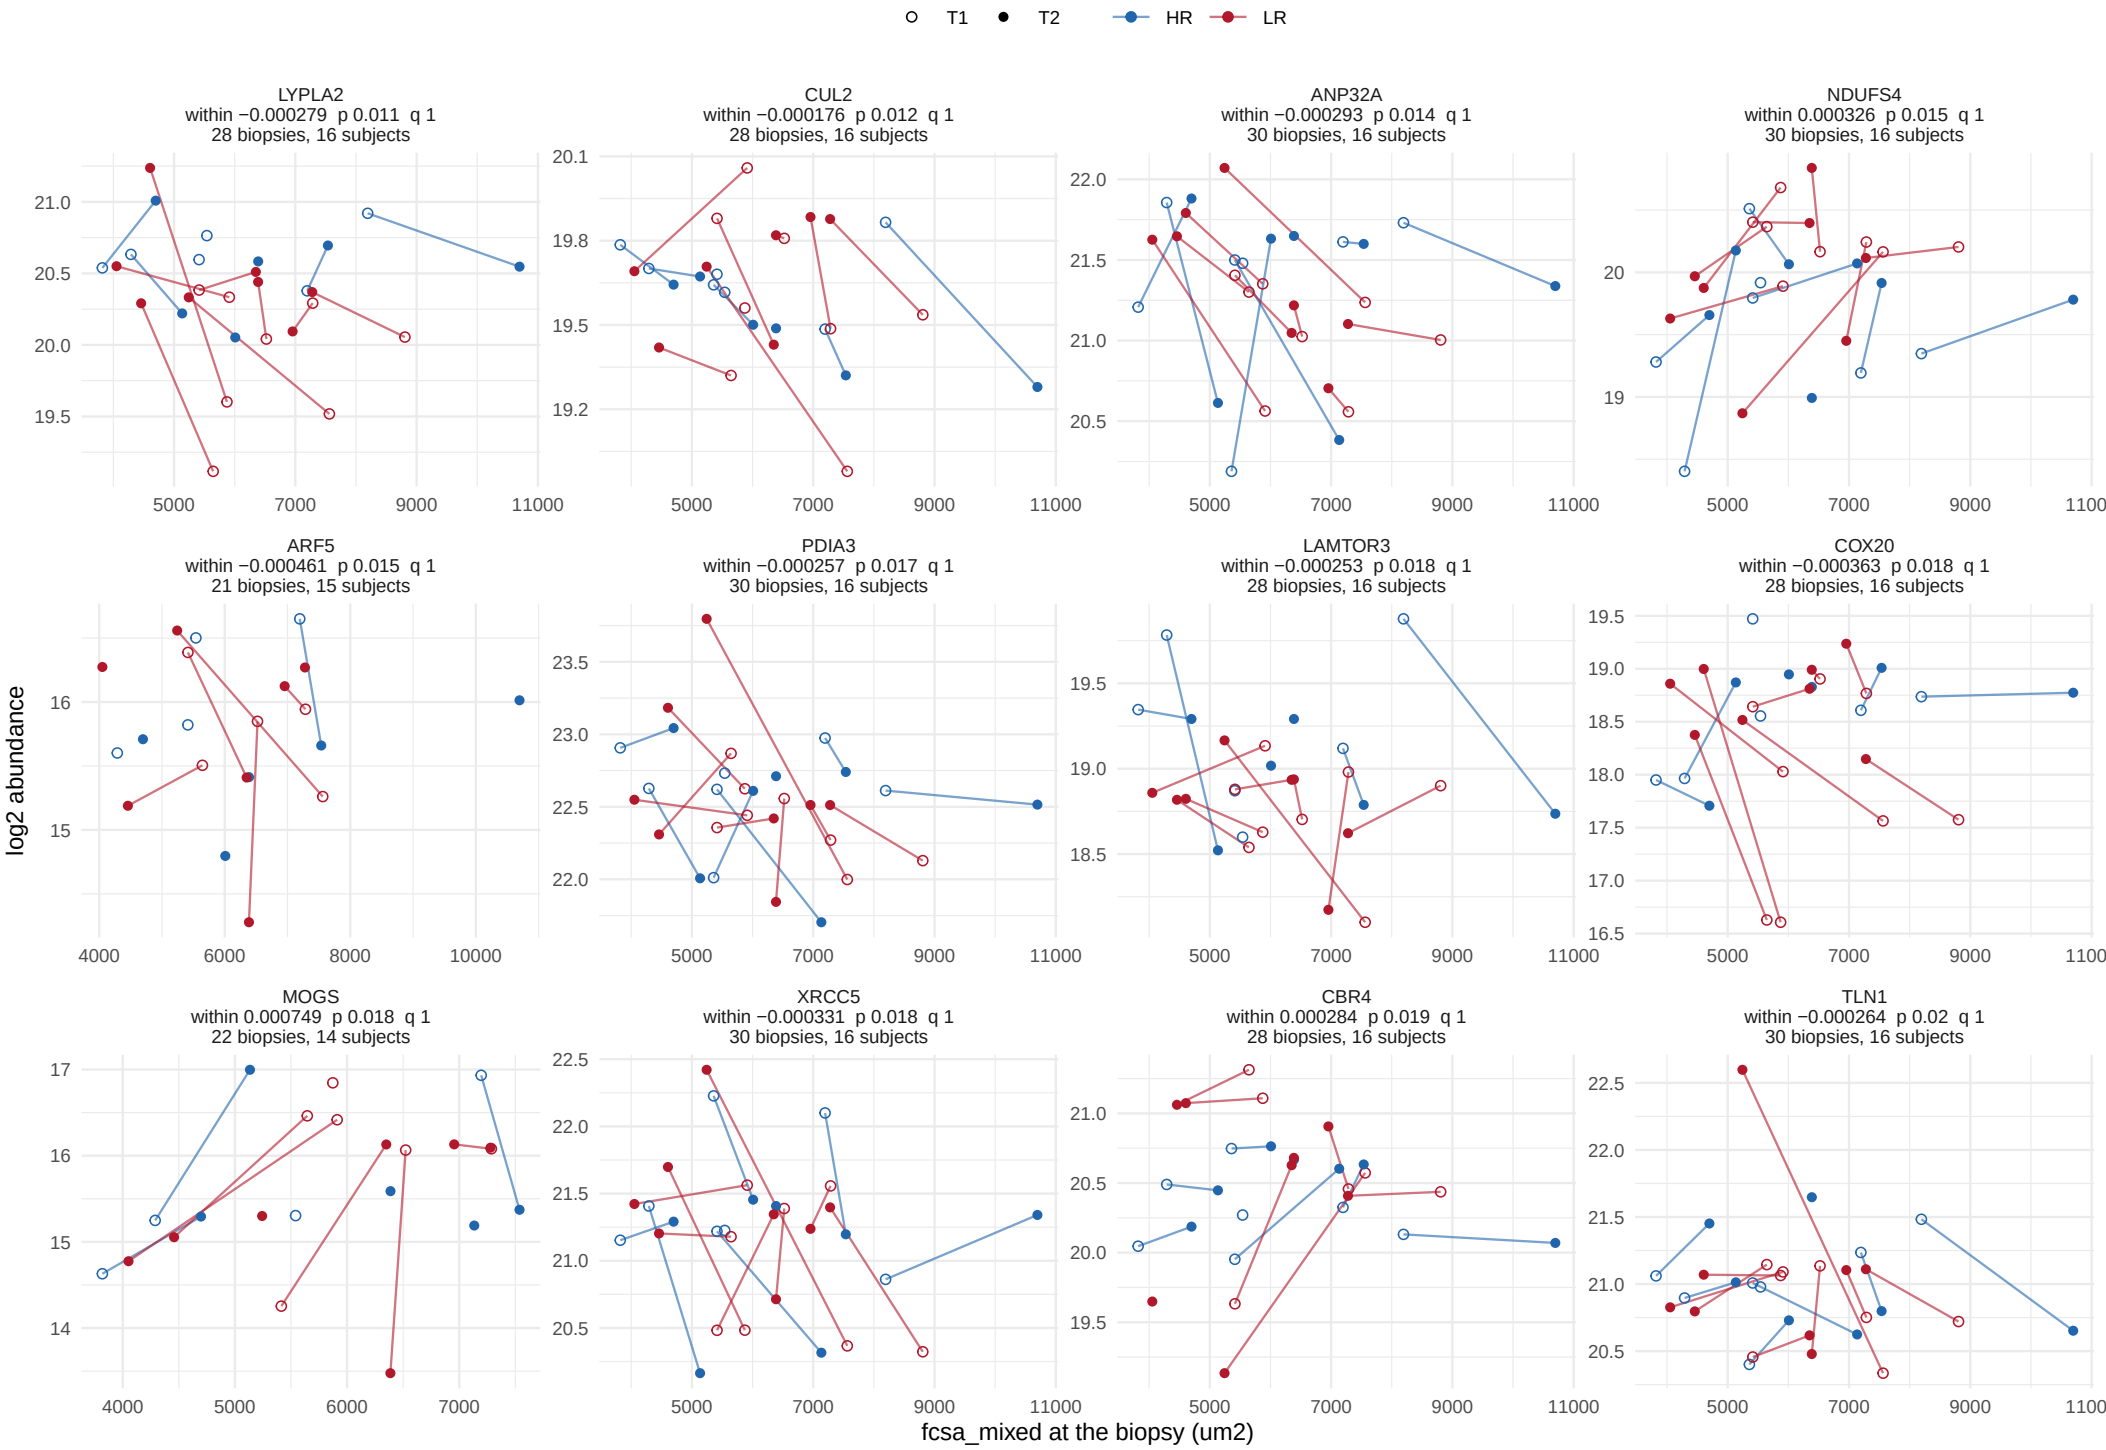

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_mixed, within−person term


62 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 3 of 6.

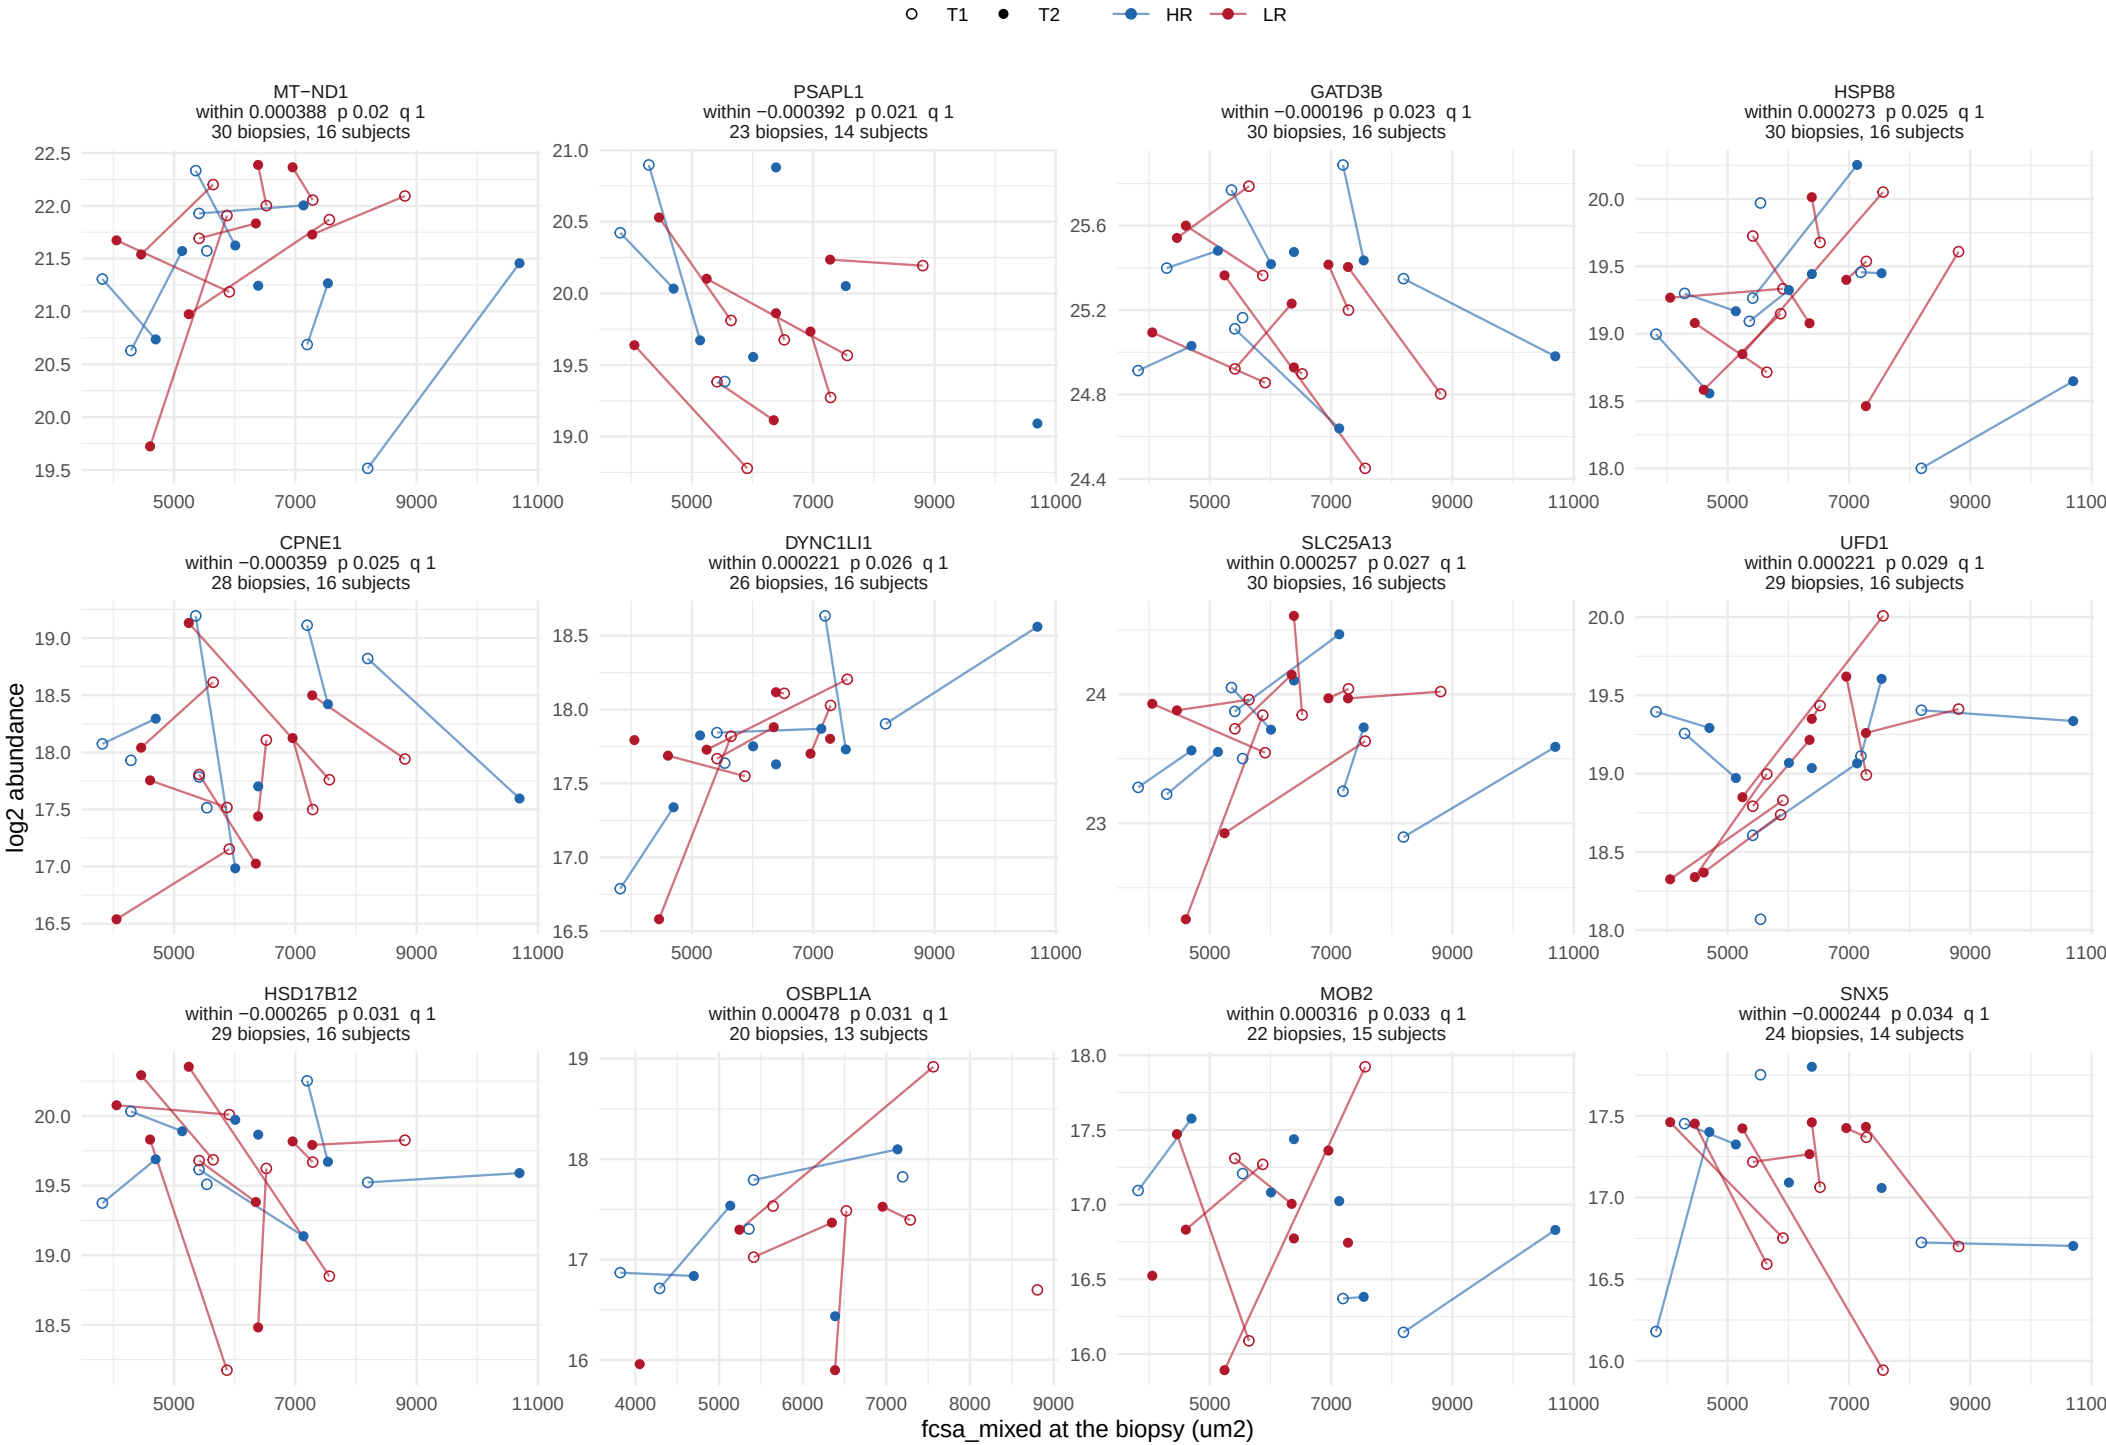

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_mixed, within−person term


62 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 4 of 6.

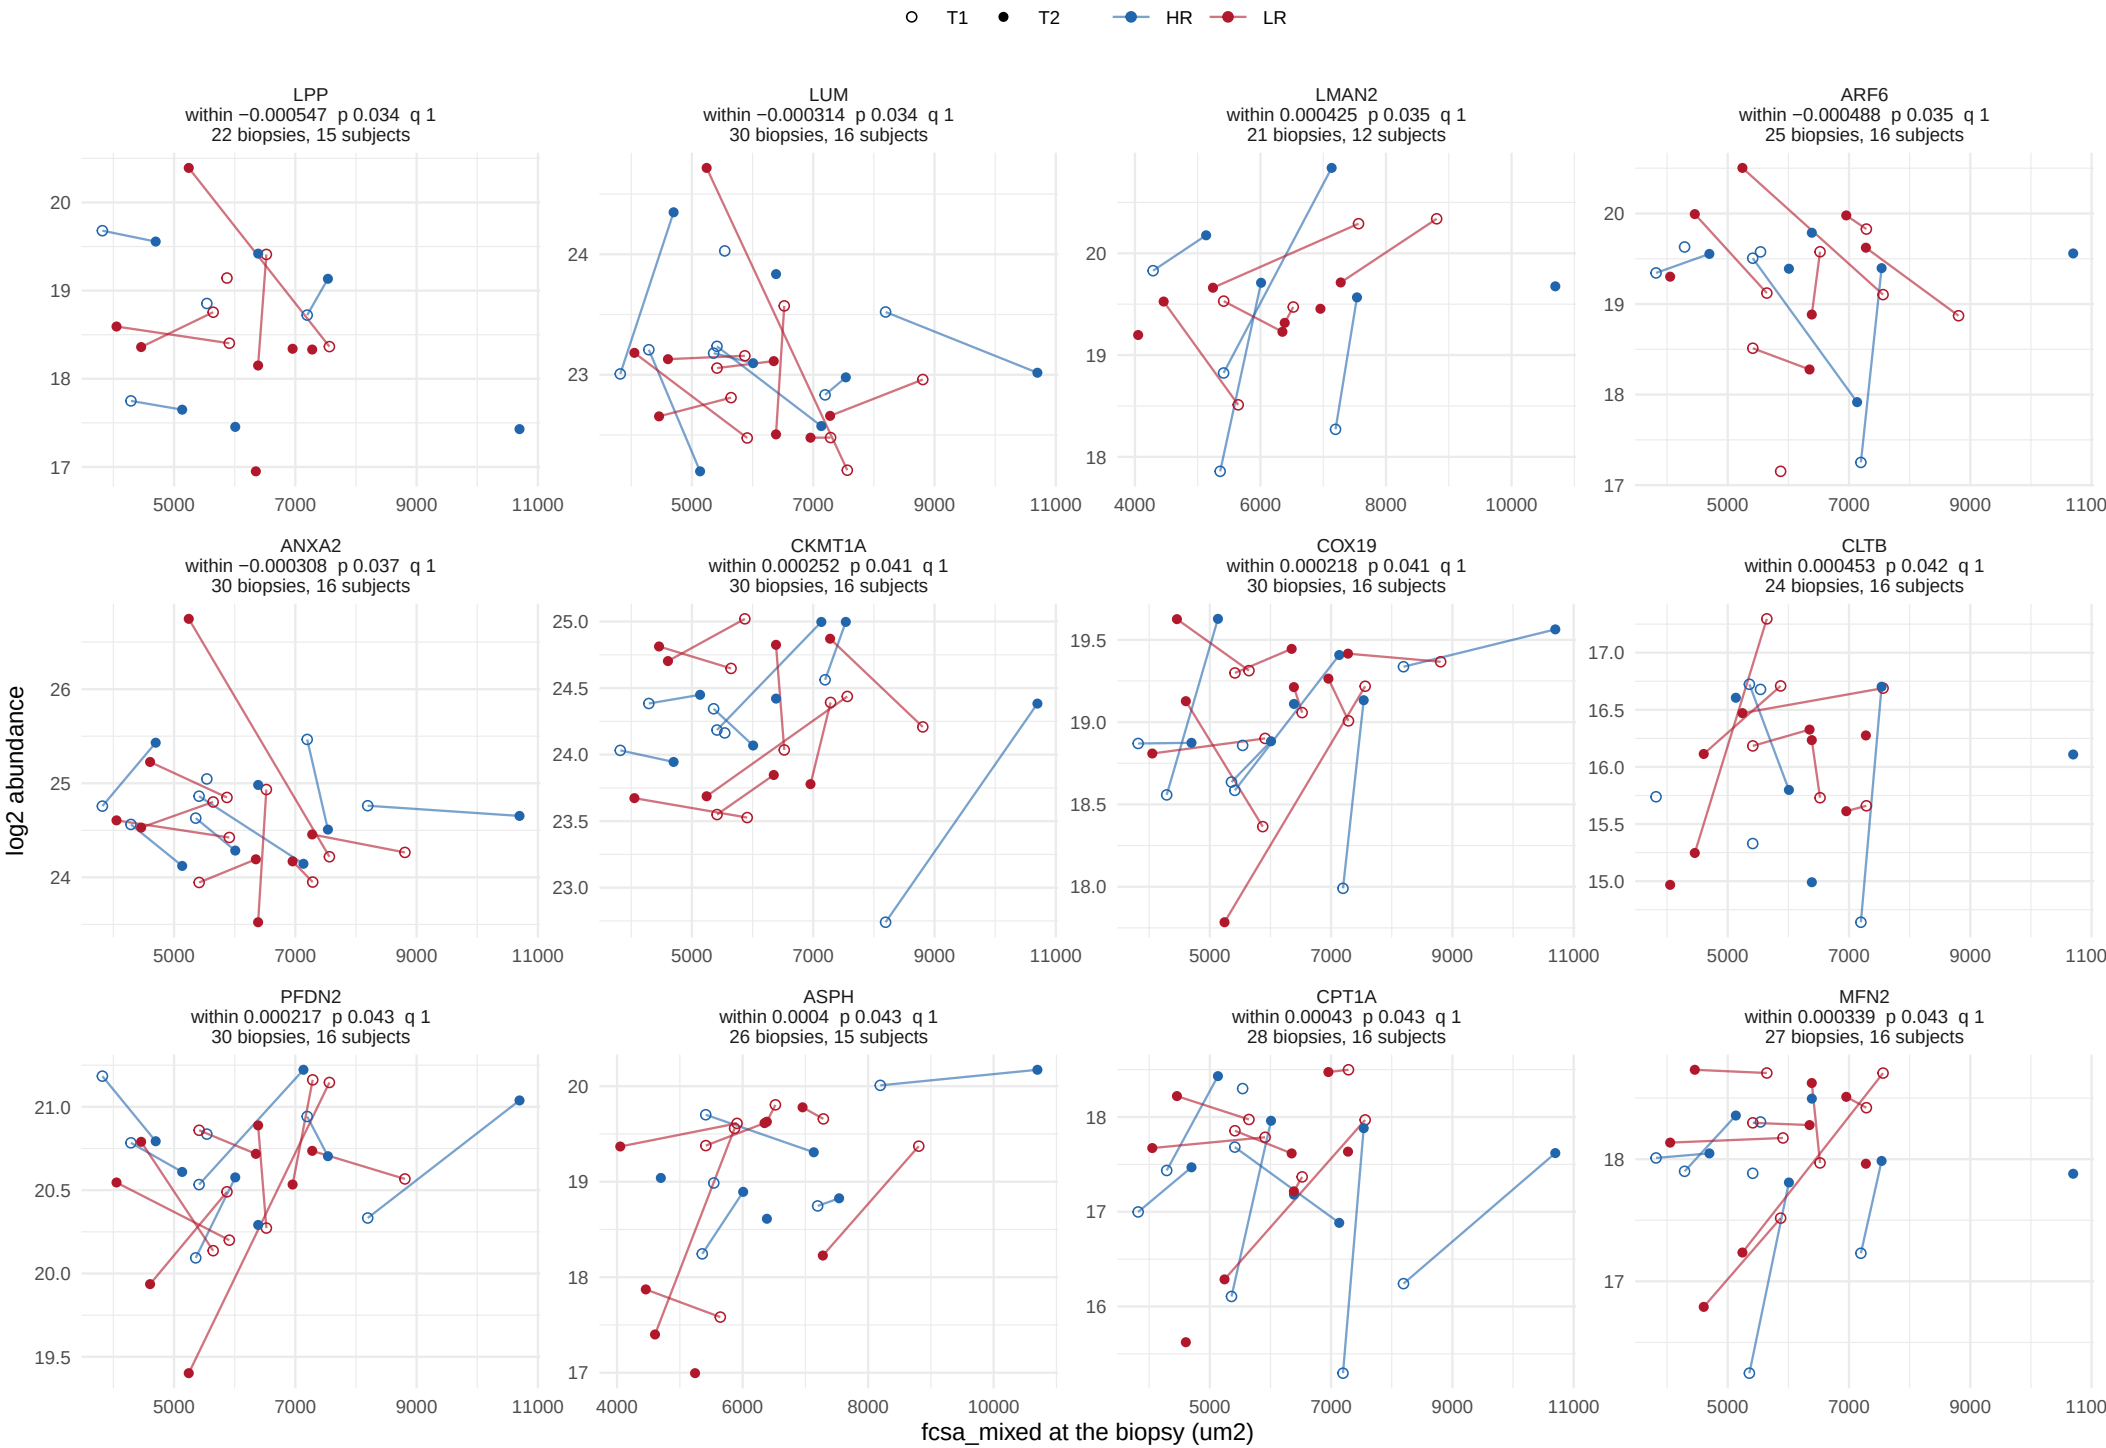

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_mixed, within−person term


62 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 5 of 6.

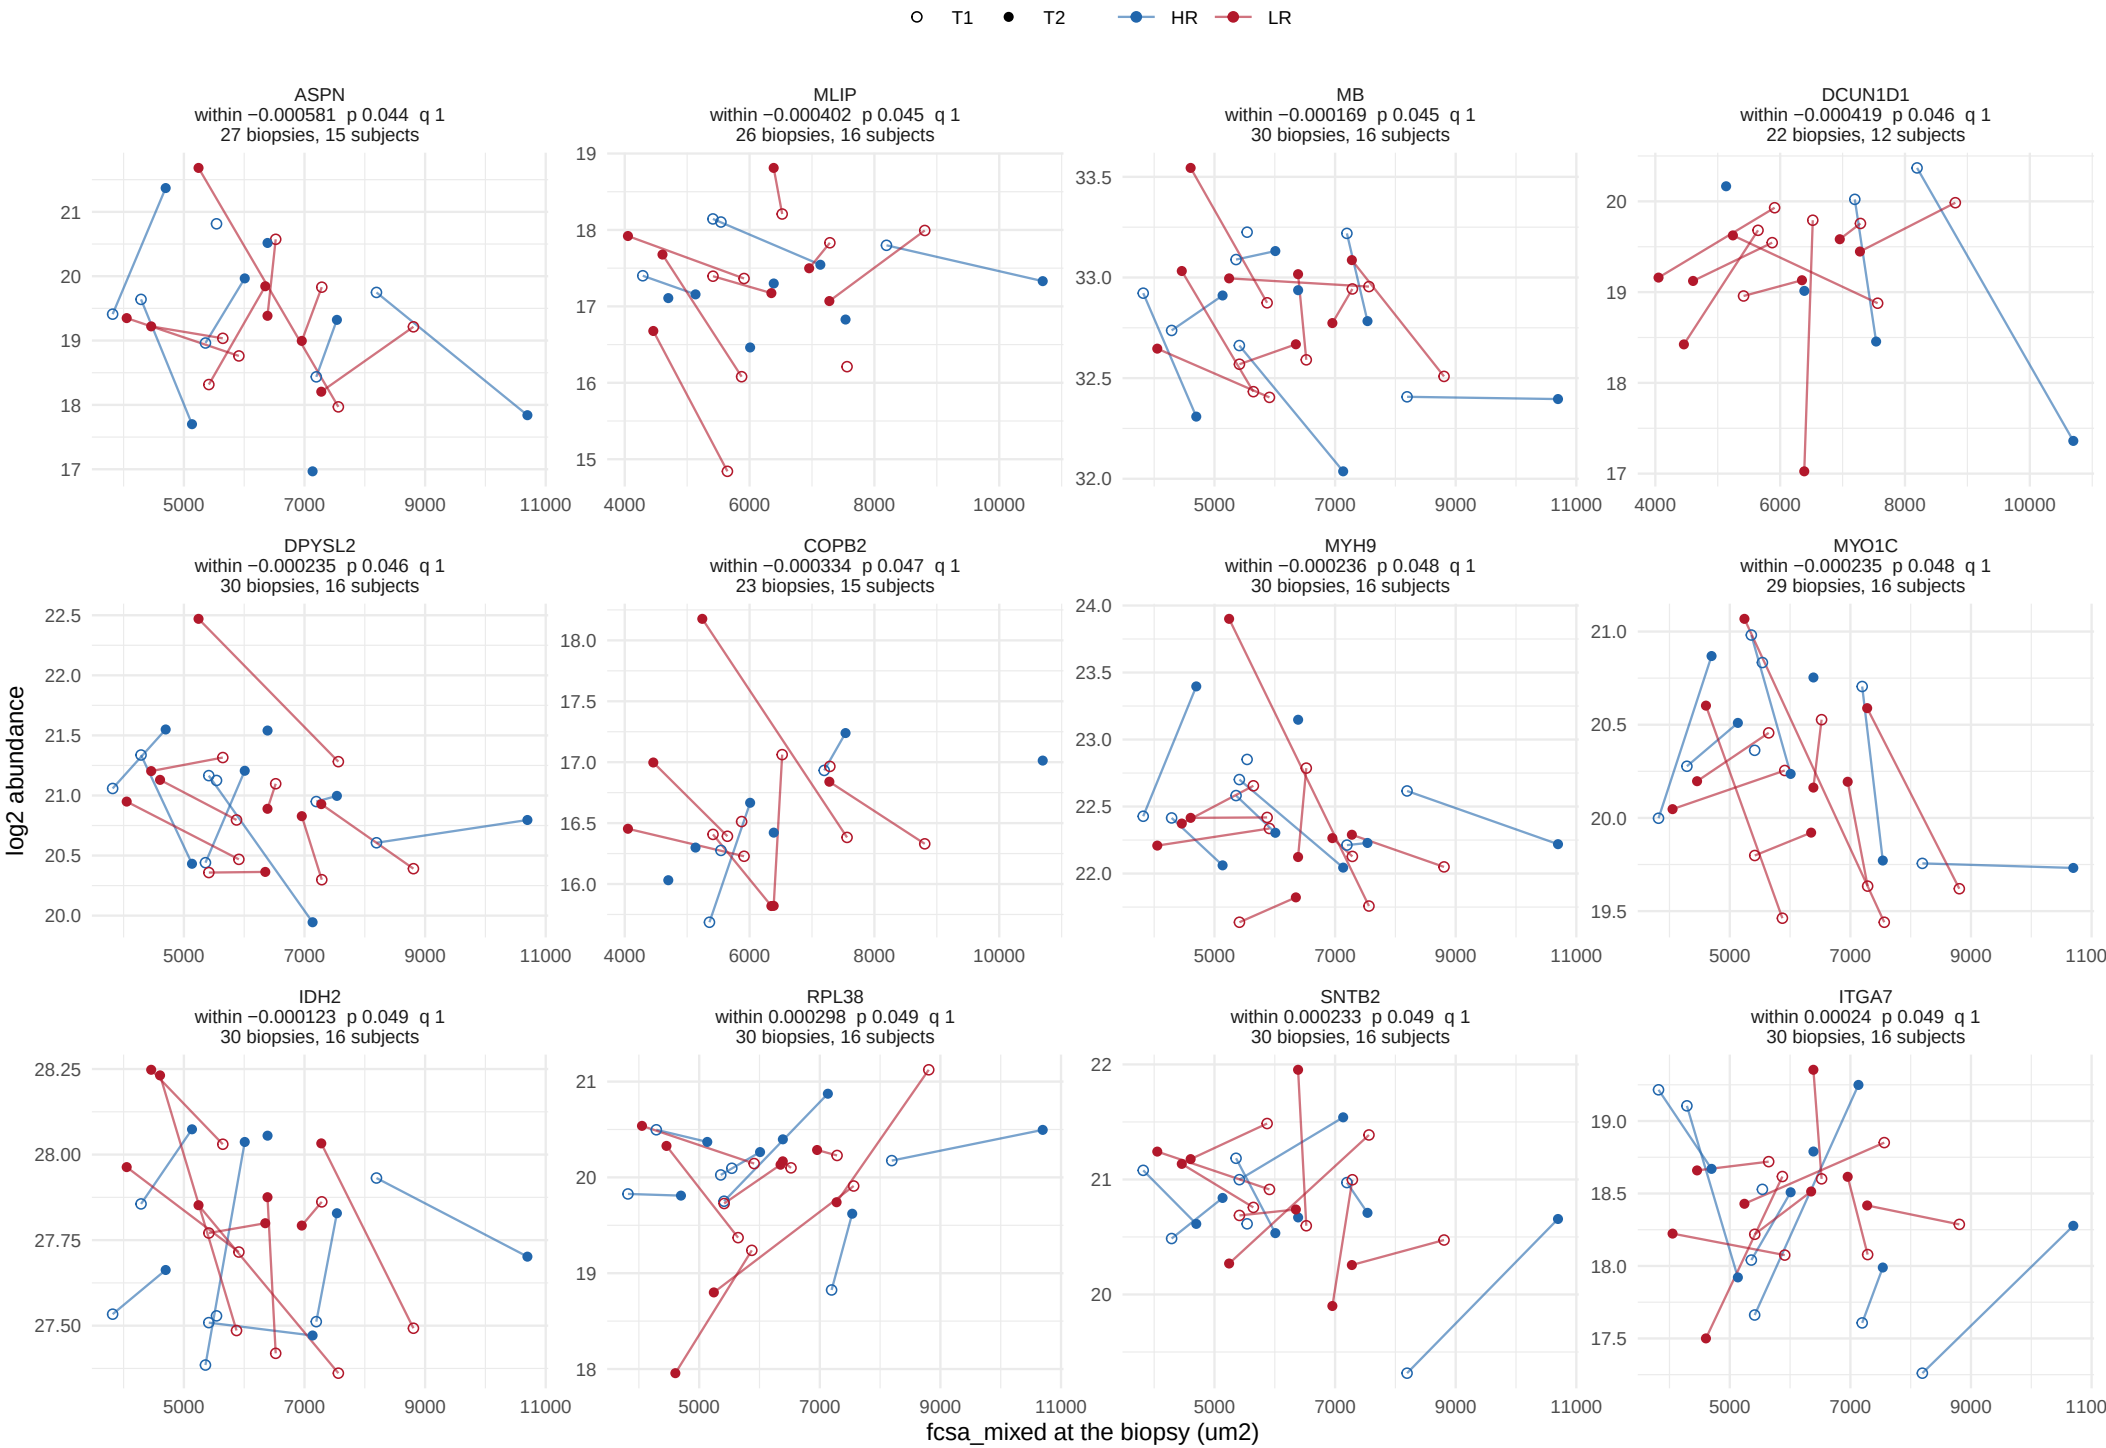

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_mixed, within−person term


62 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 6 of 6.

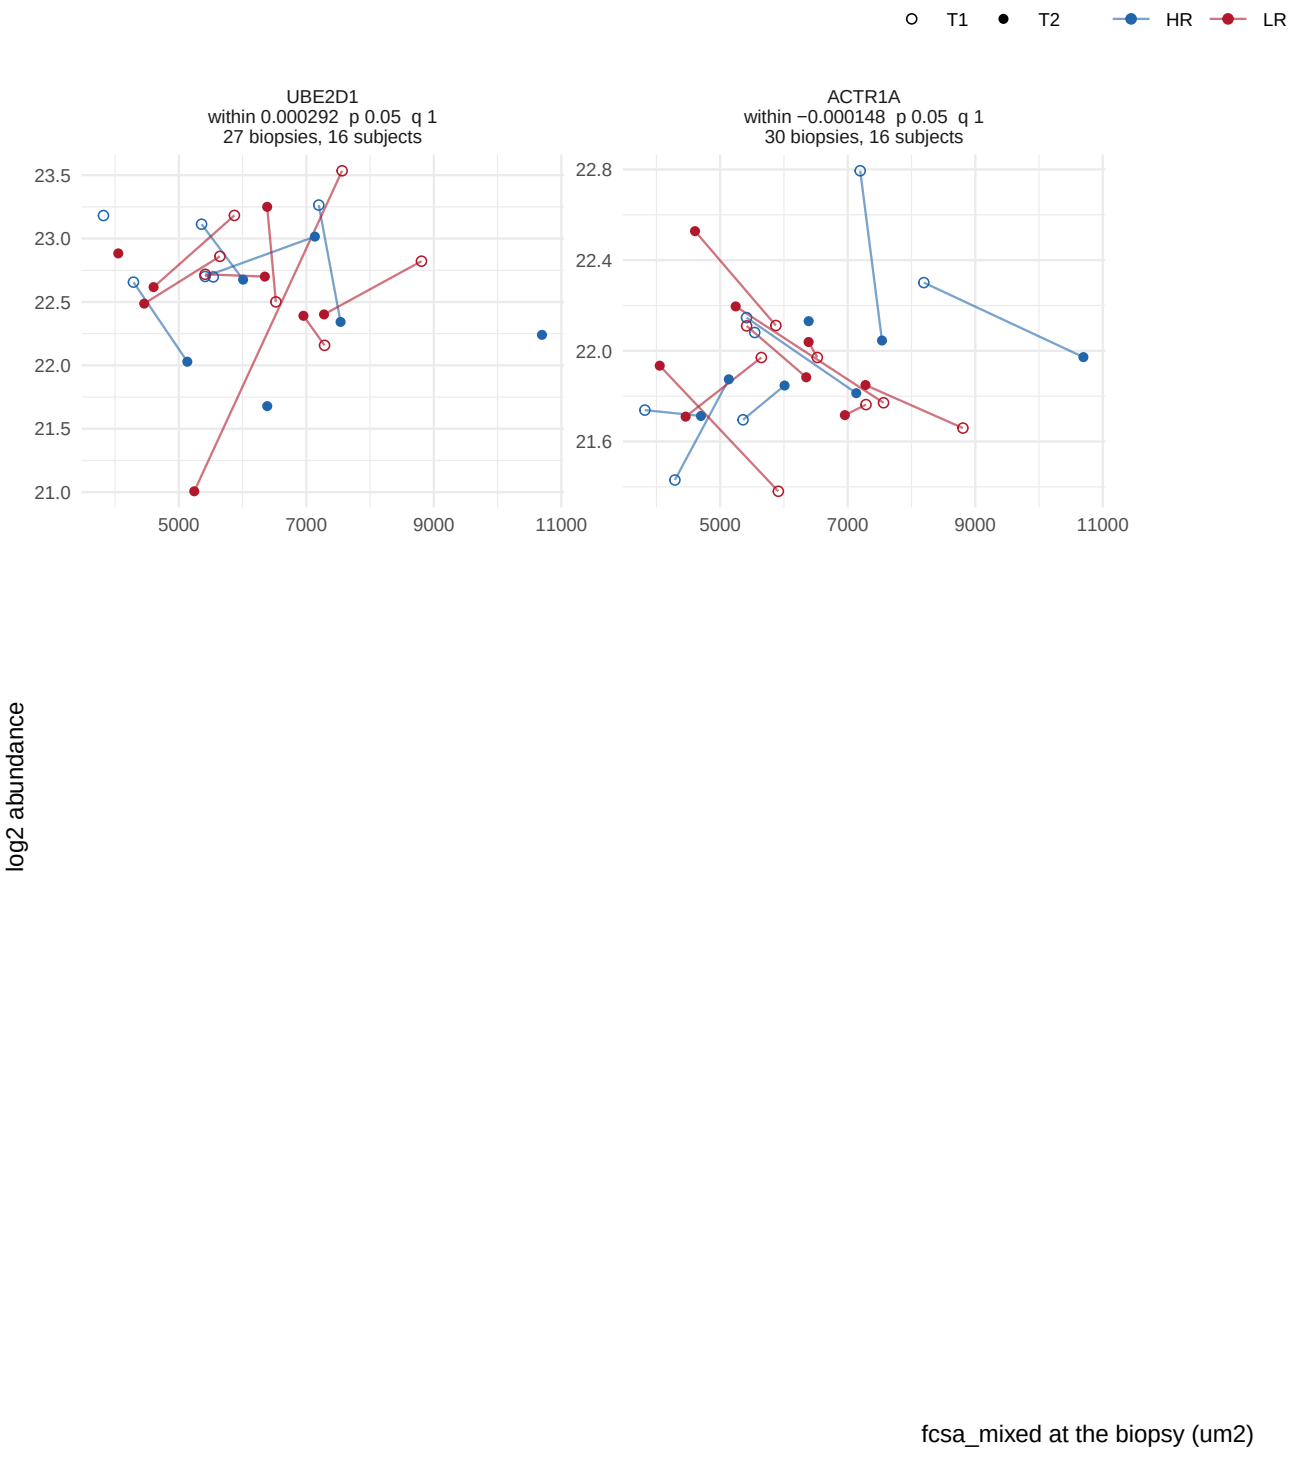

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_mixed, between−person term


71 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 1 of 6.

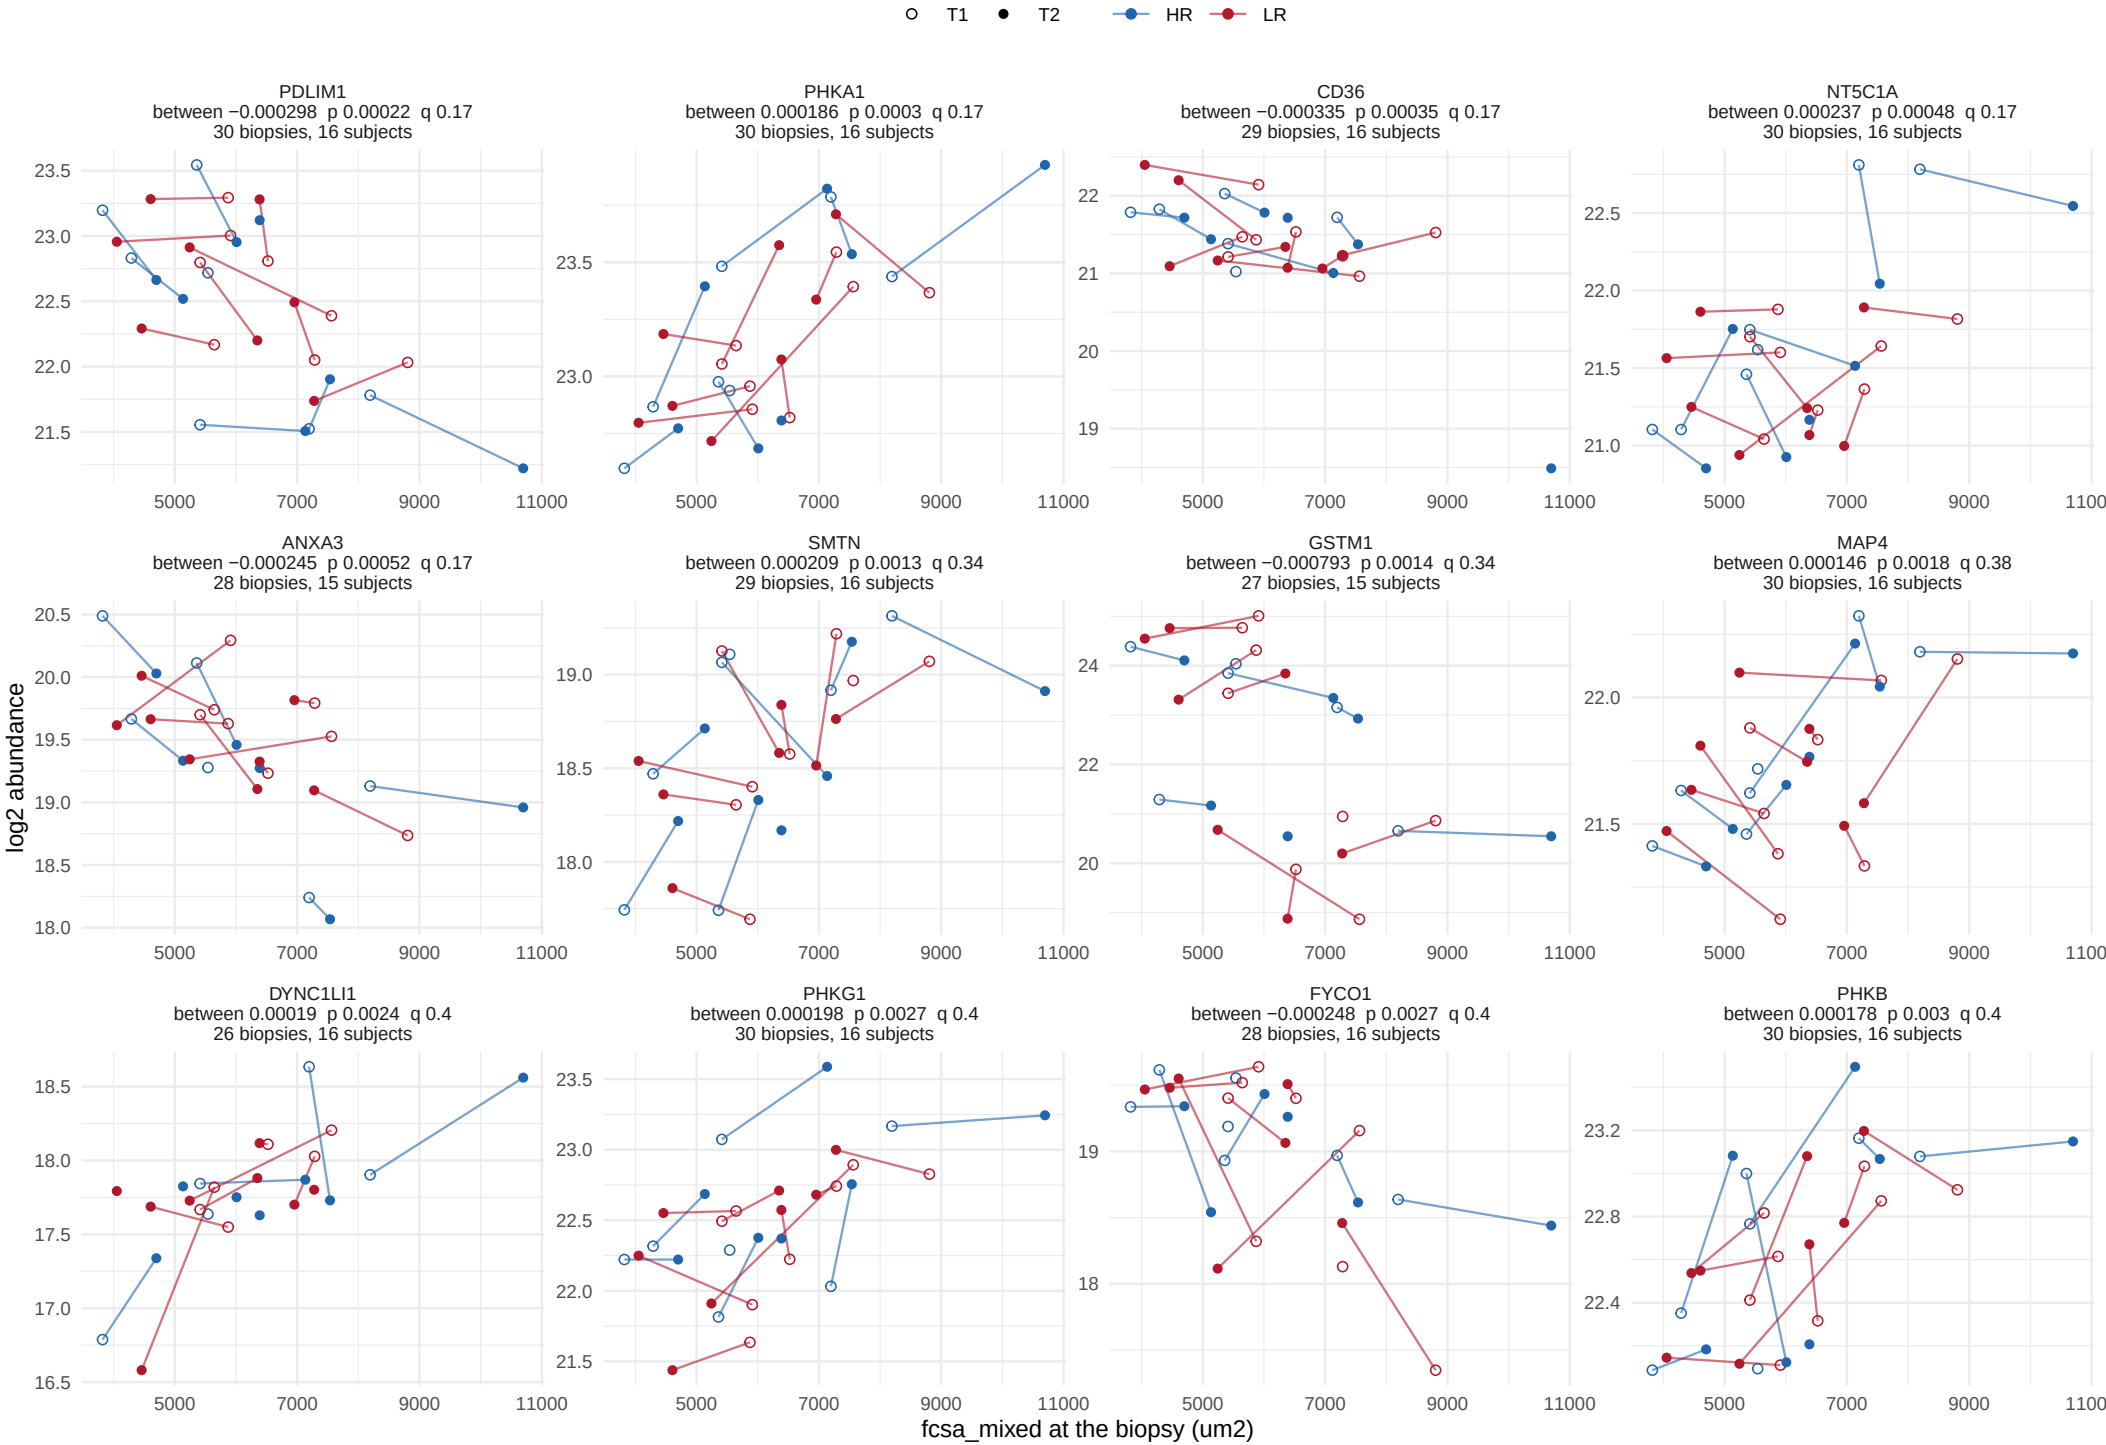

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_mixed, between−person term

71 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 2 of 6.

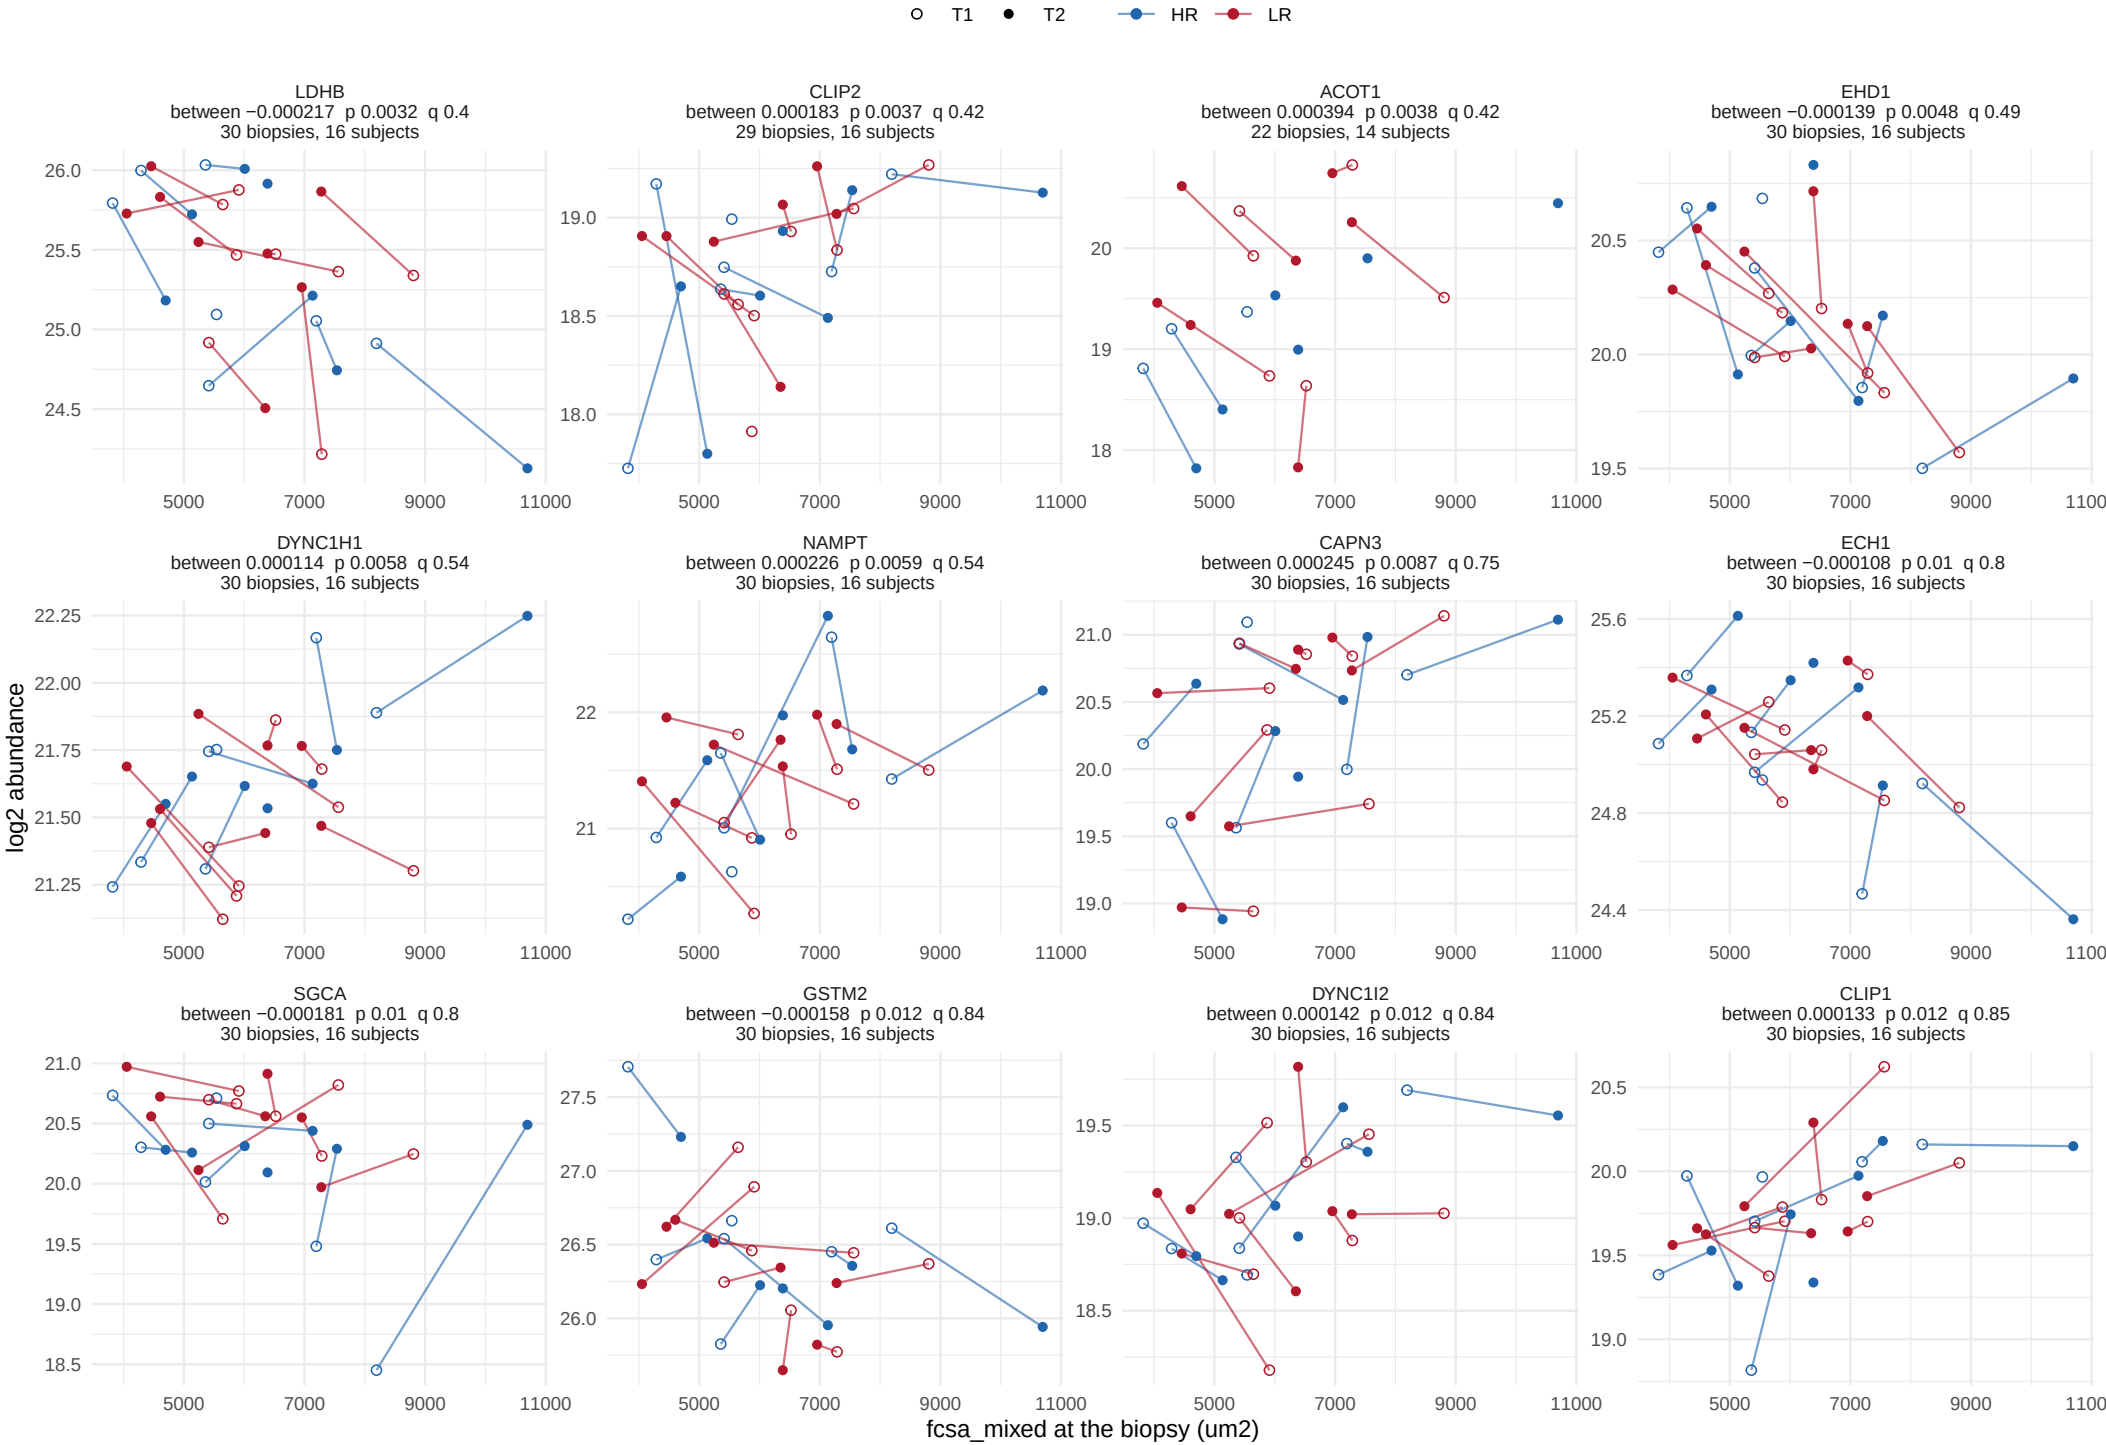

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_mixed, between−person term


71 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 3 of 6.



limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_mixed, between−person term


71 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 4 of 6.

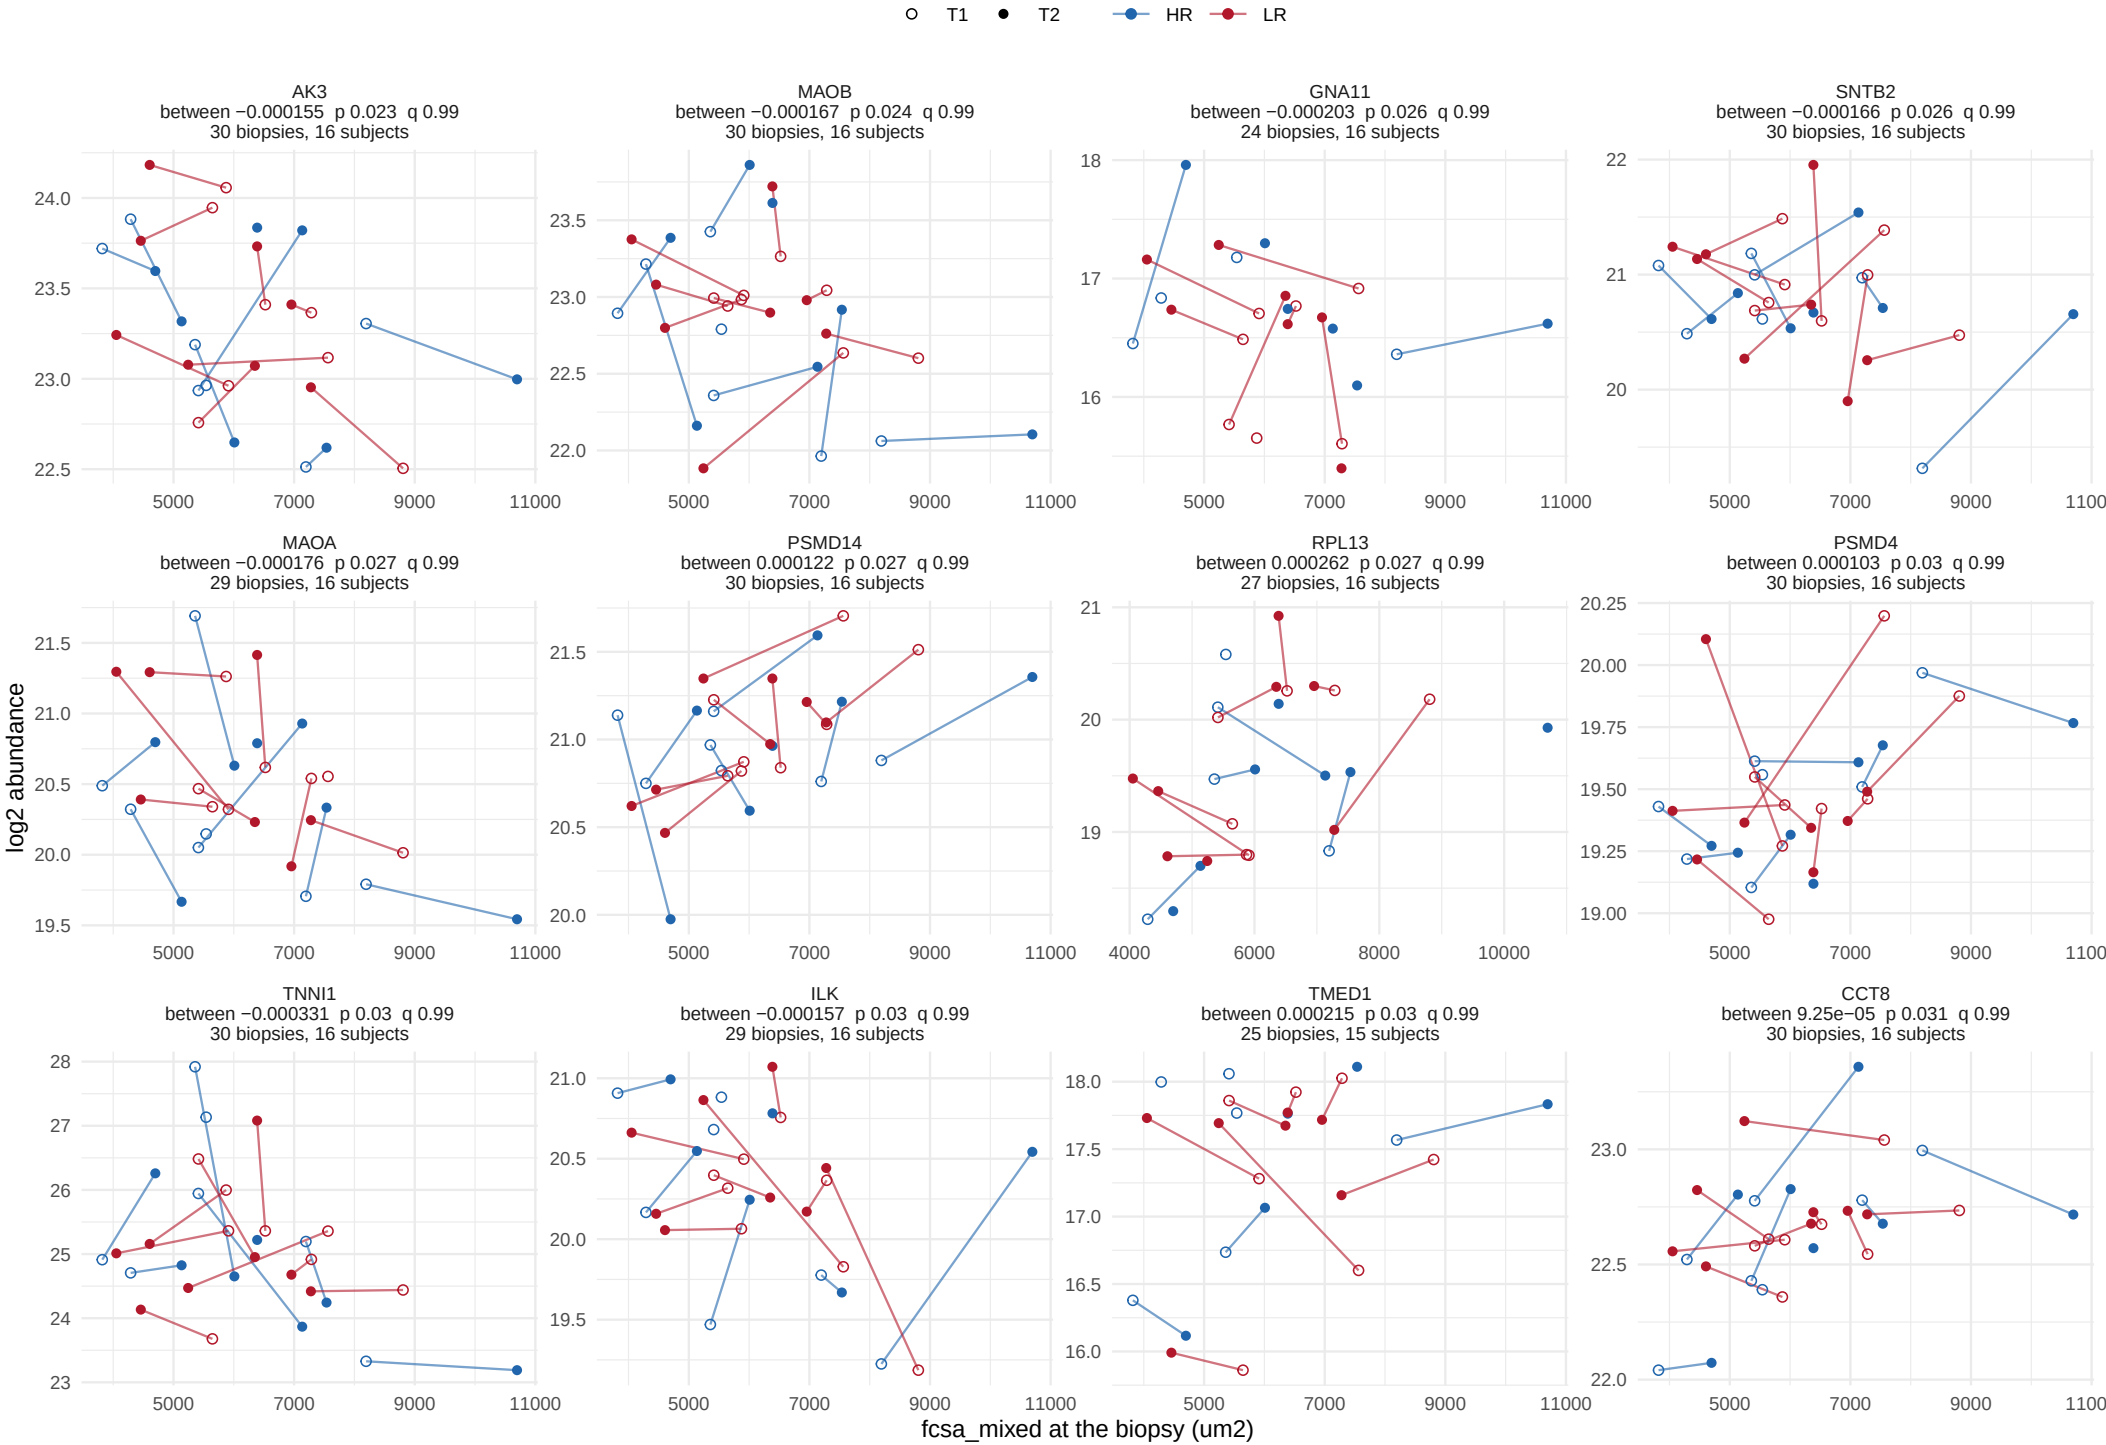

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_mixed, between−person term


71 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 5 of 6.

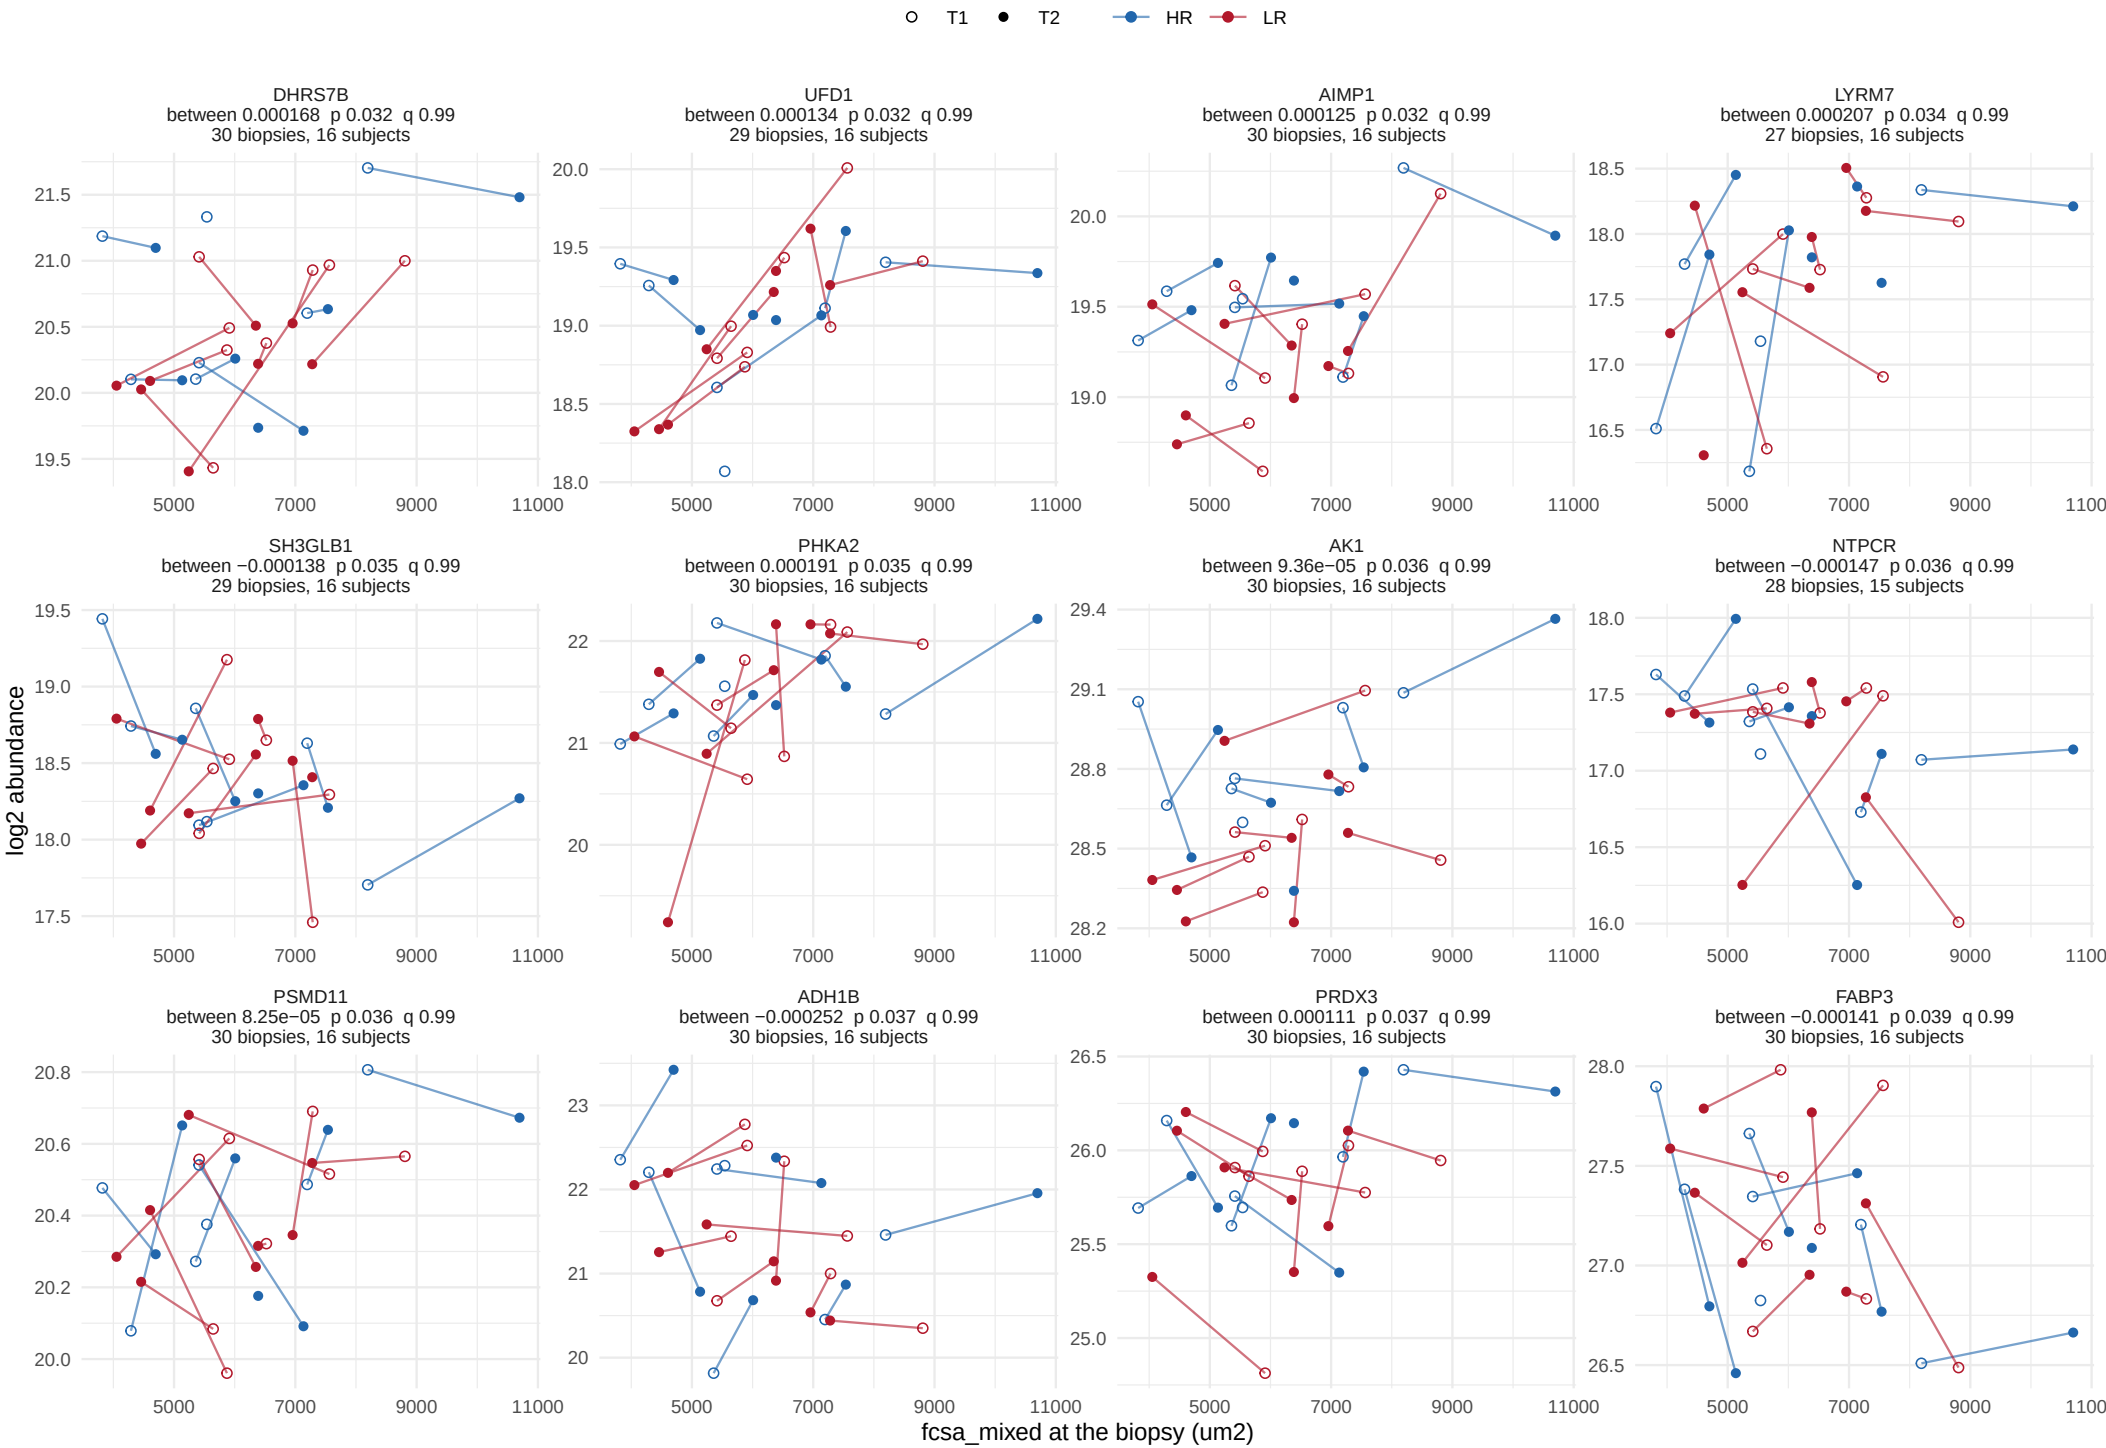

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_mixed, between−person term


71 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 6 of 6.

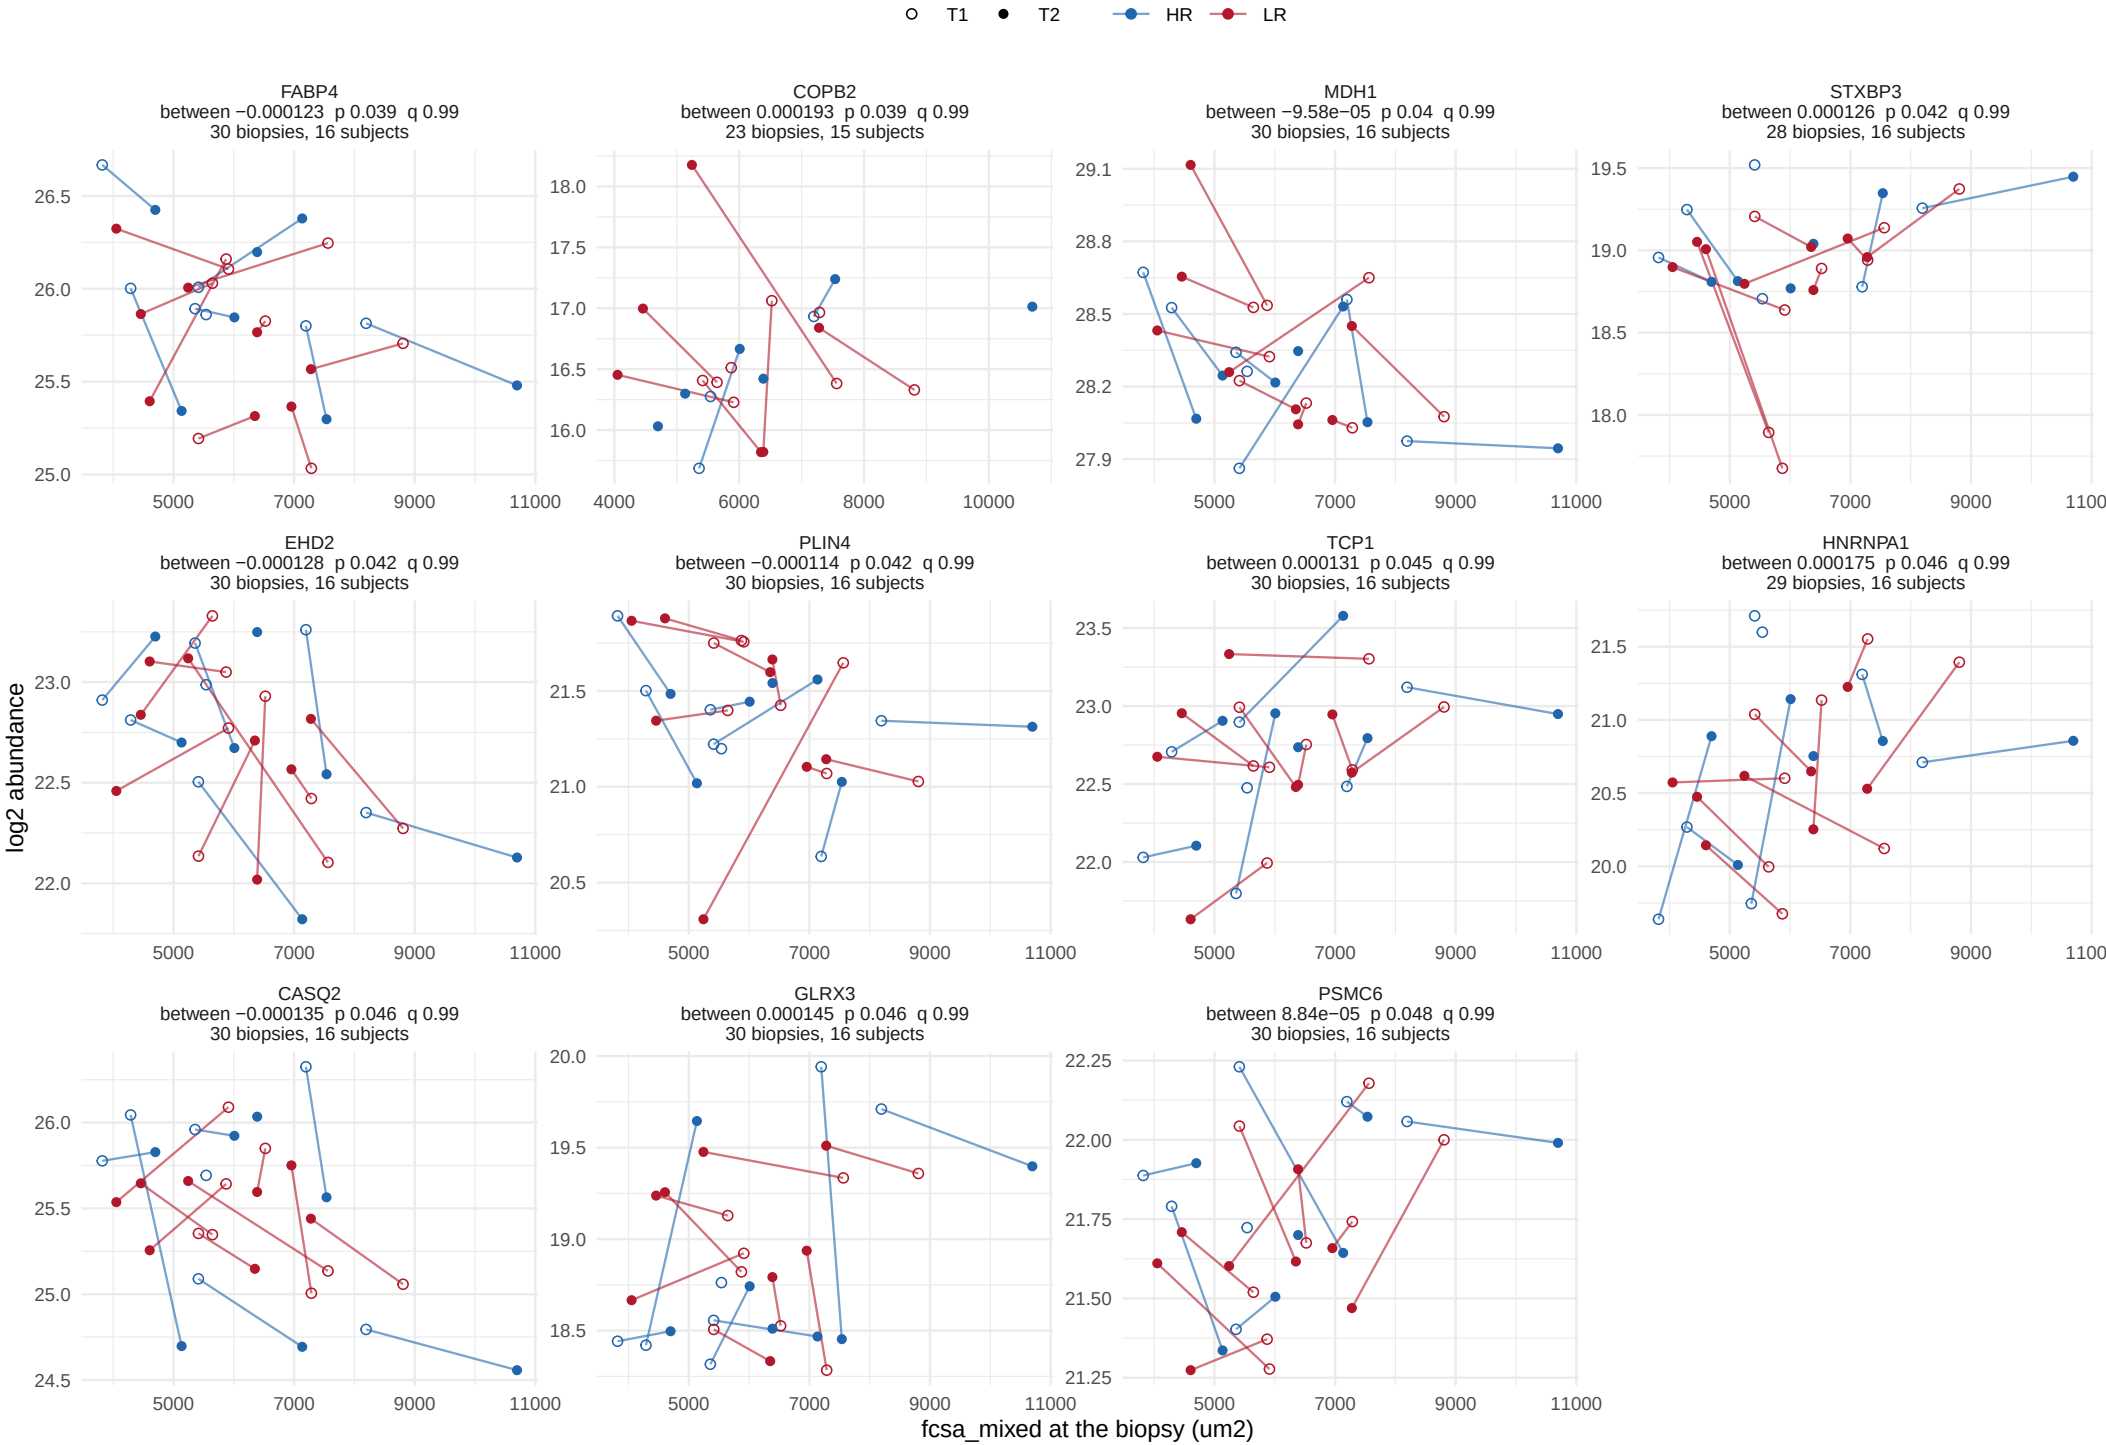

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_type1, within−person term


55 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 1 of 5.

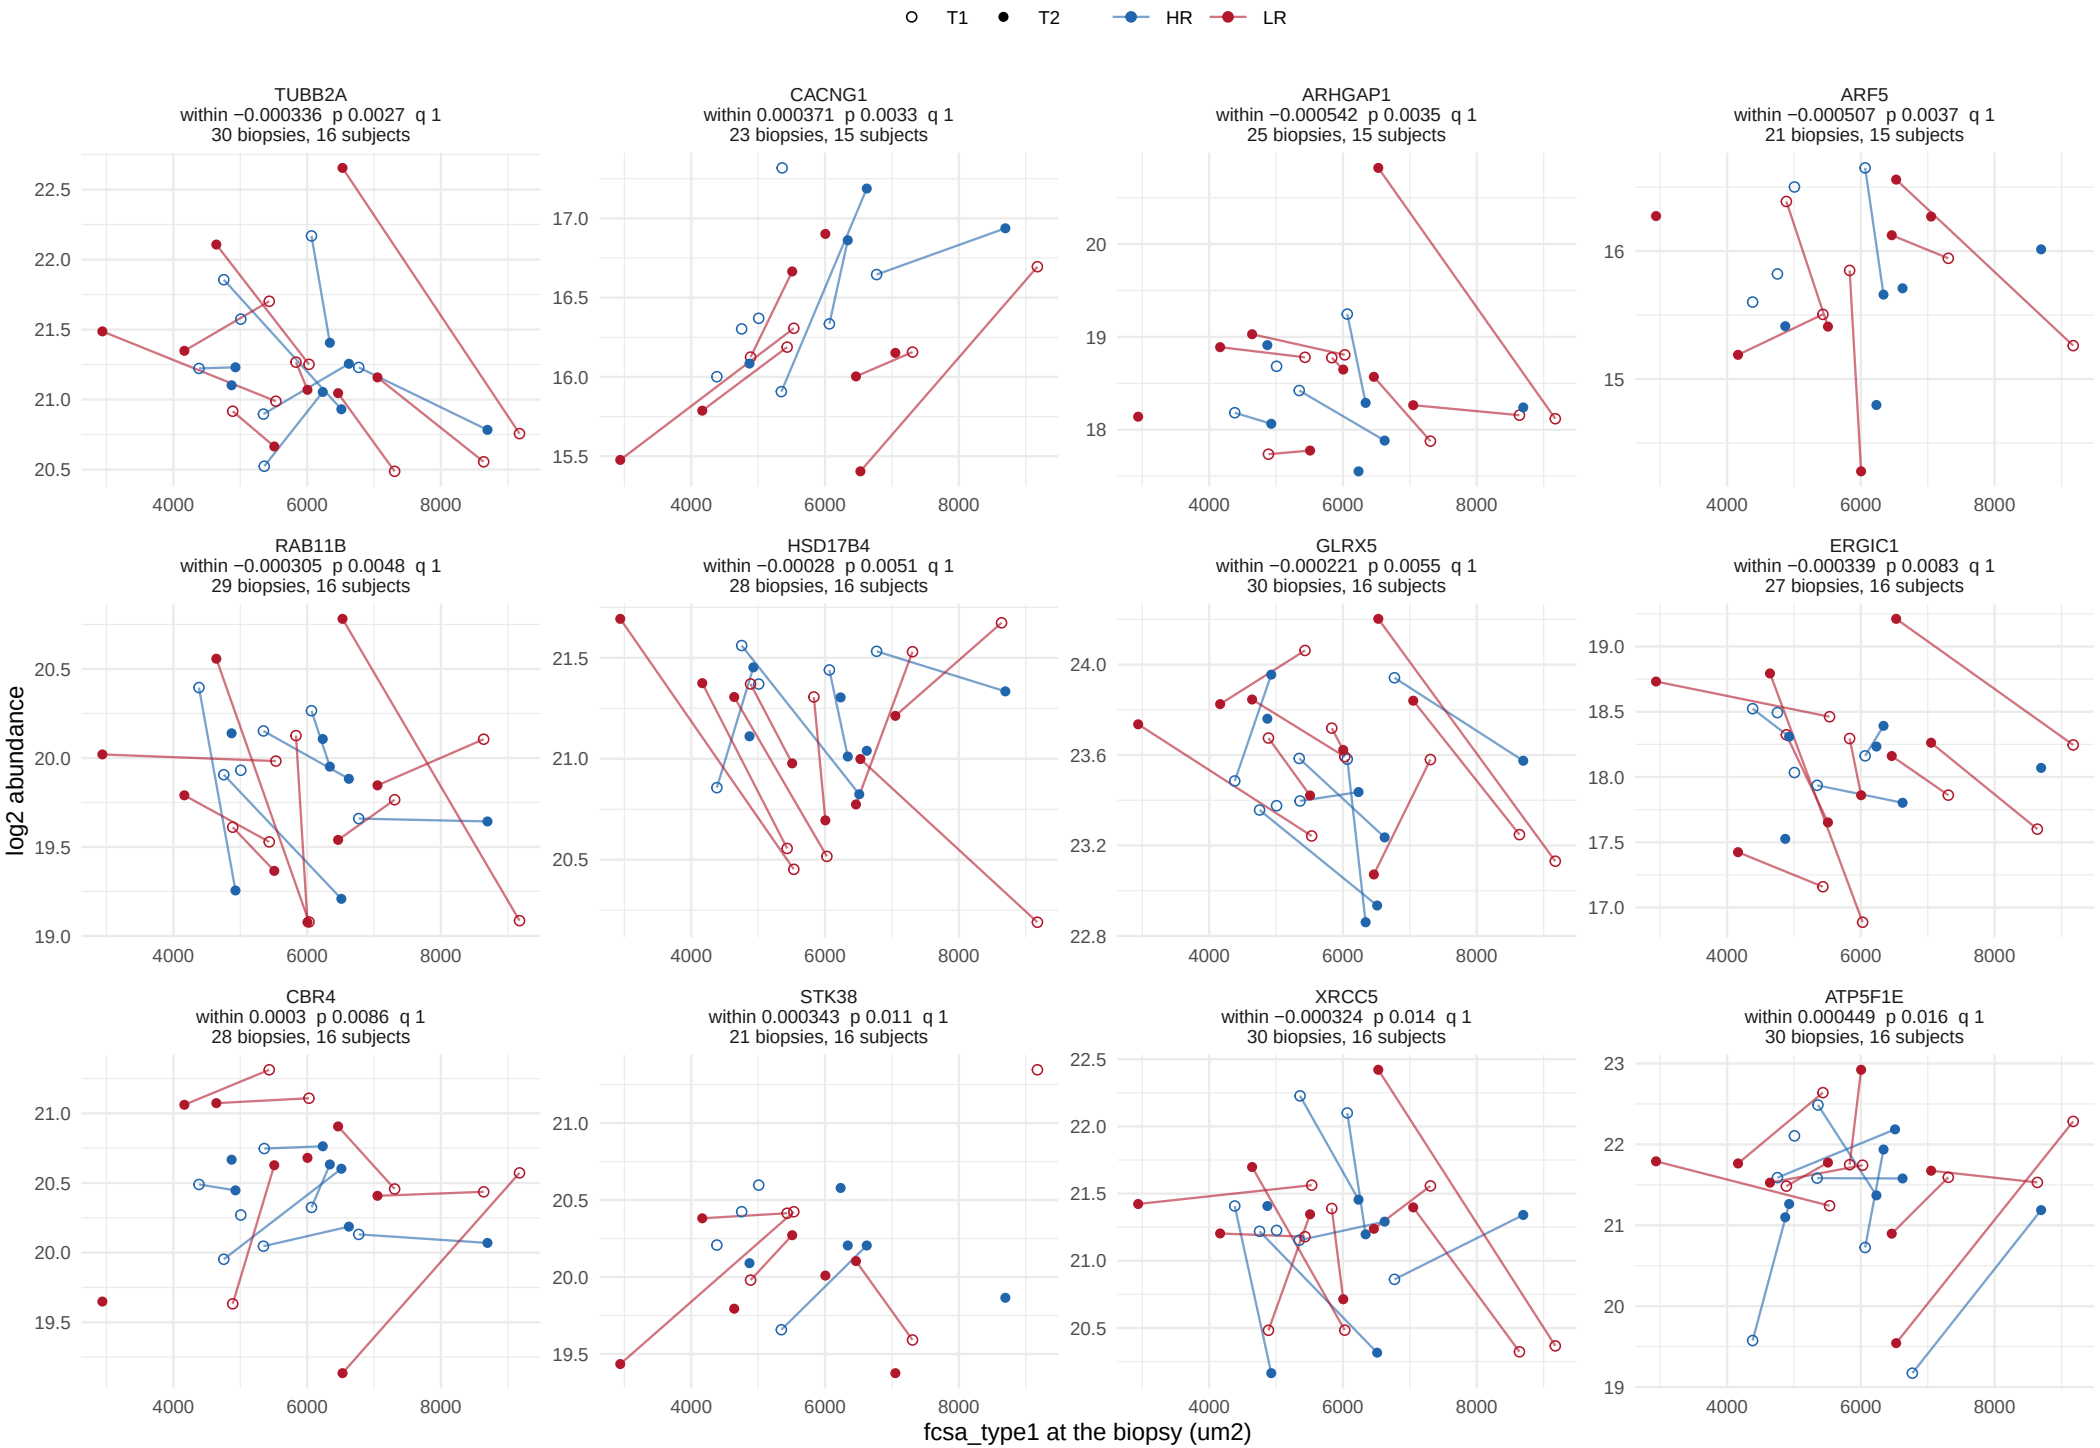

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_type1, within−person term


55 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 2 of 5.

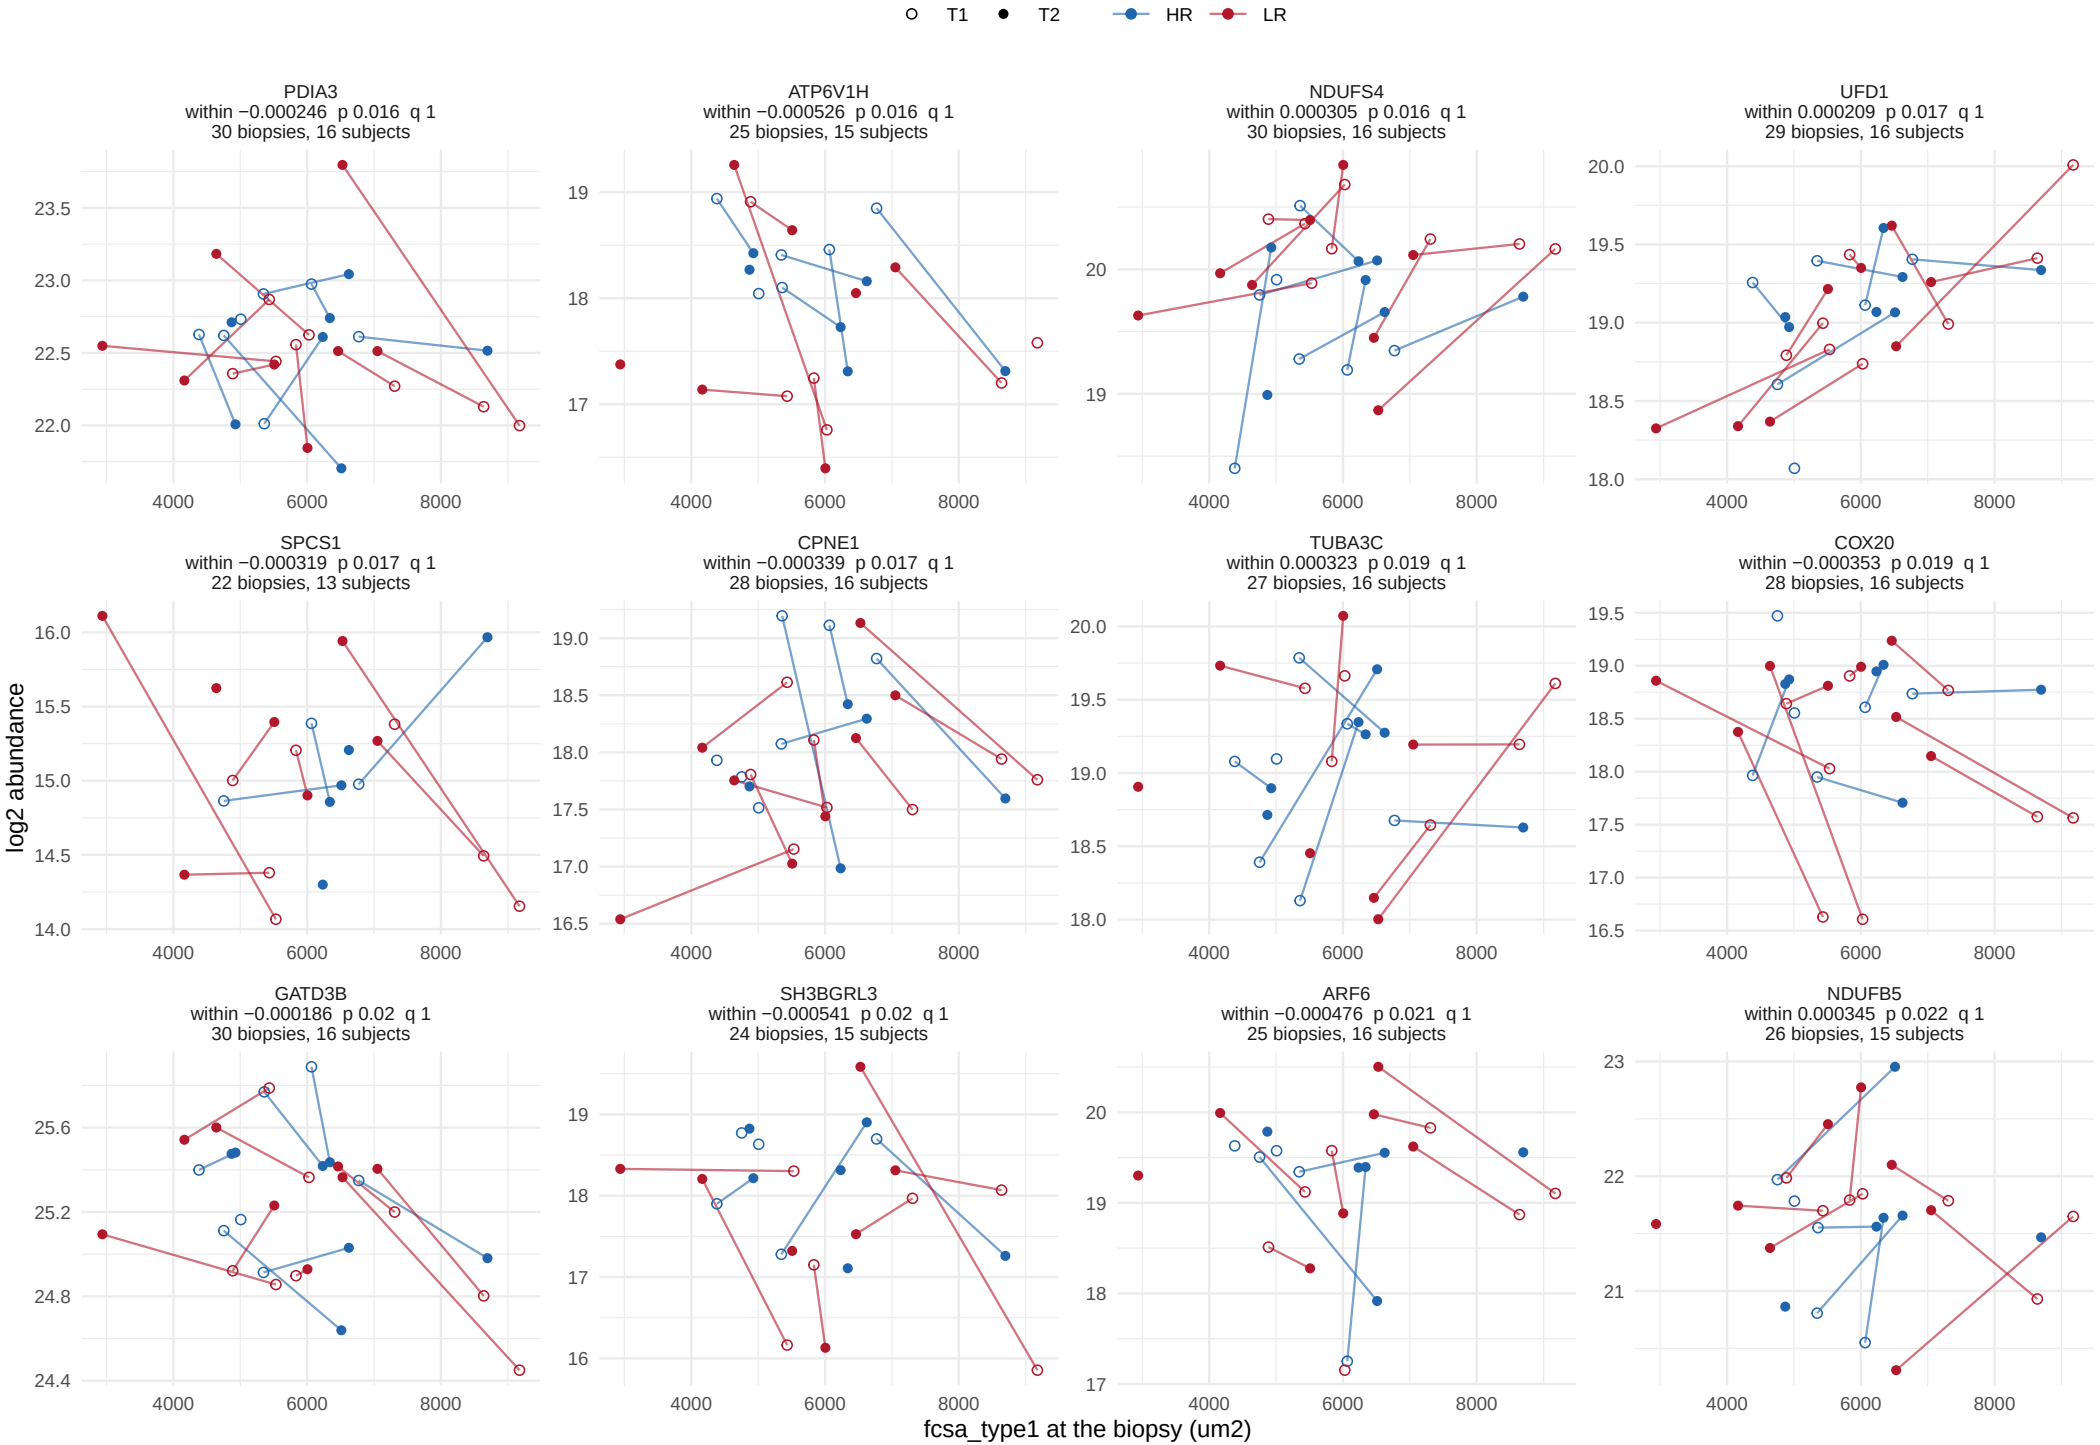

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_type1, within−person term


55 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 3 of 5.

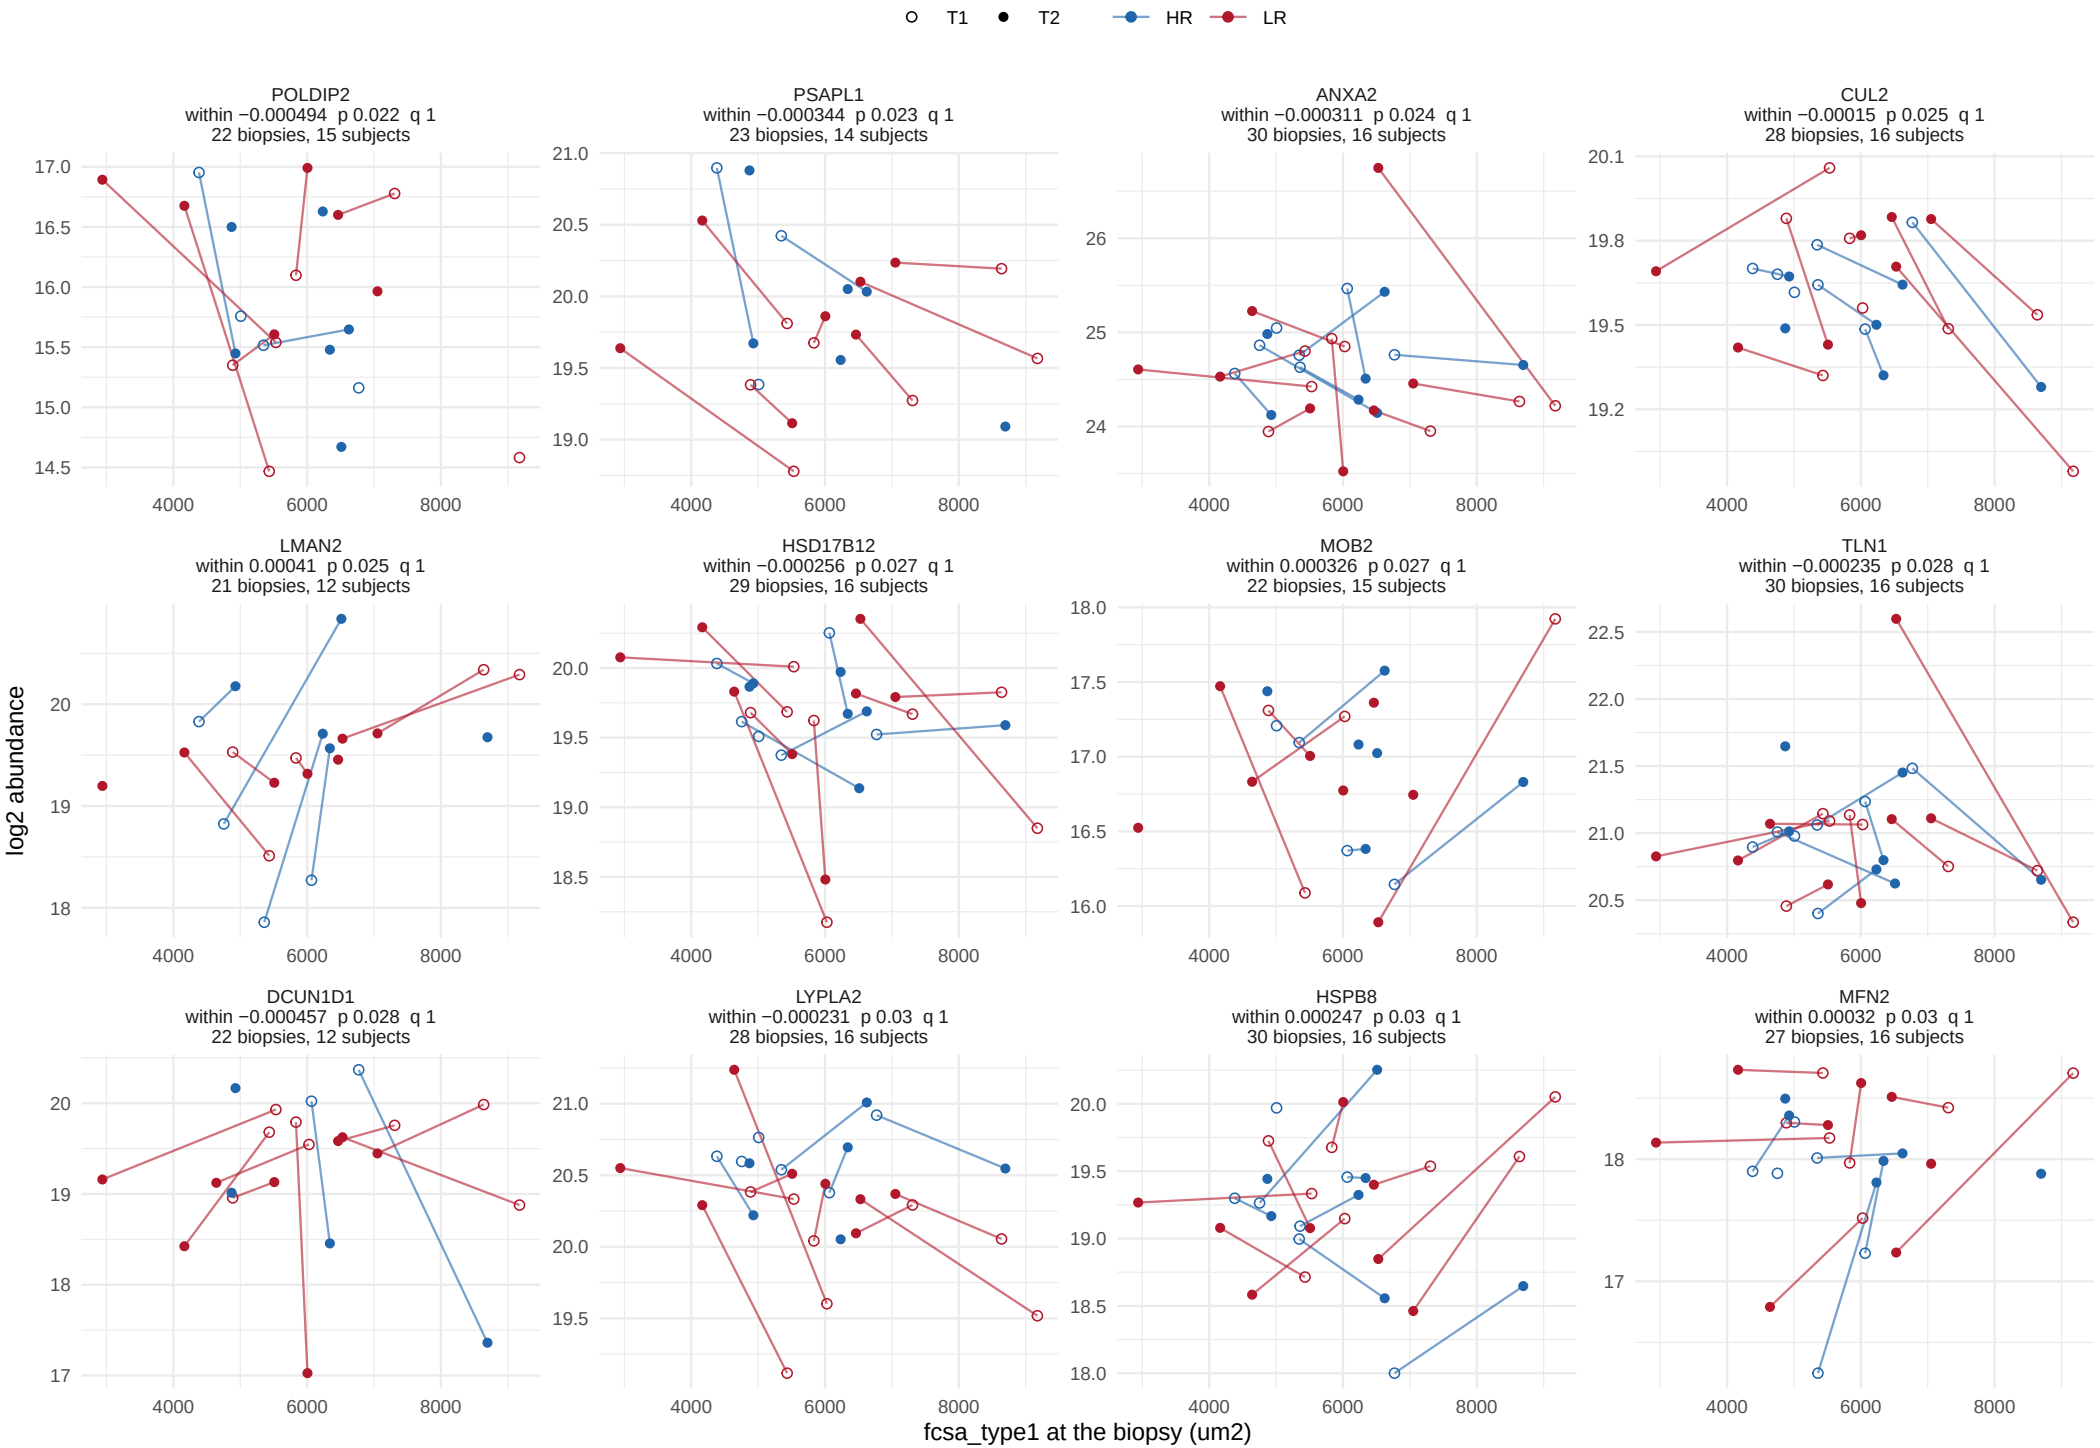

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_type1, within−person term


55 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 4 of 5.

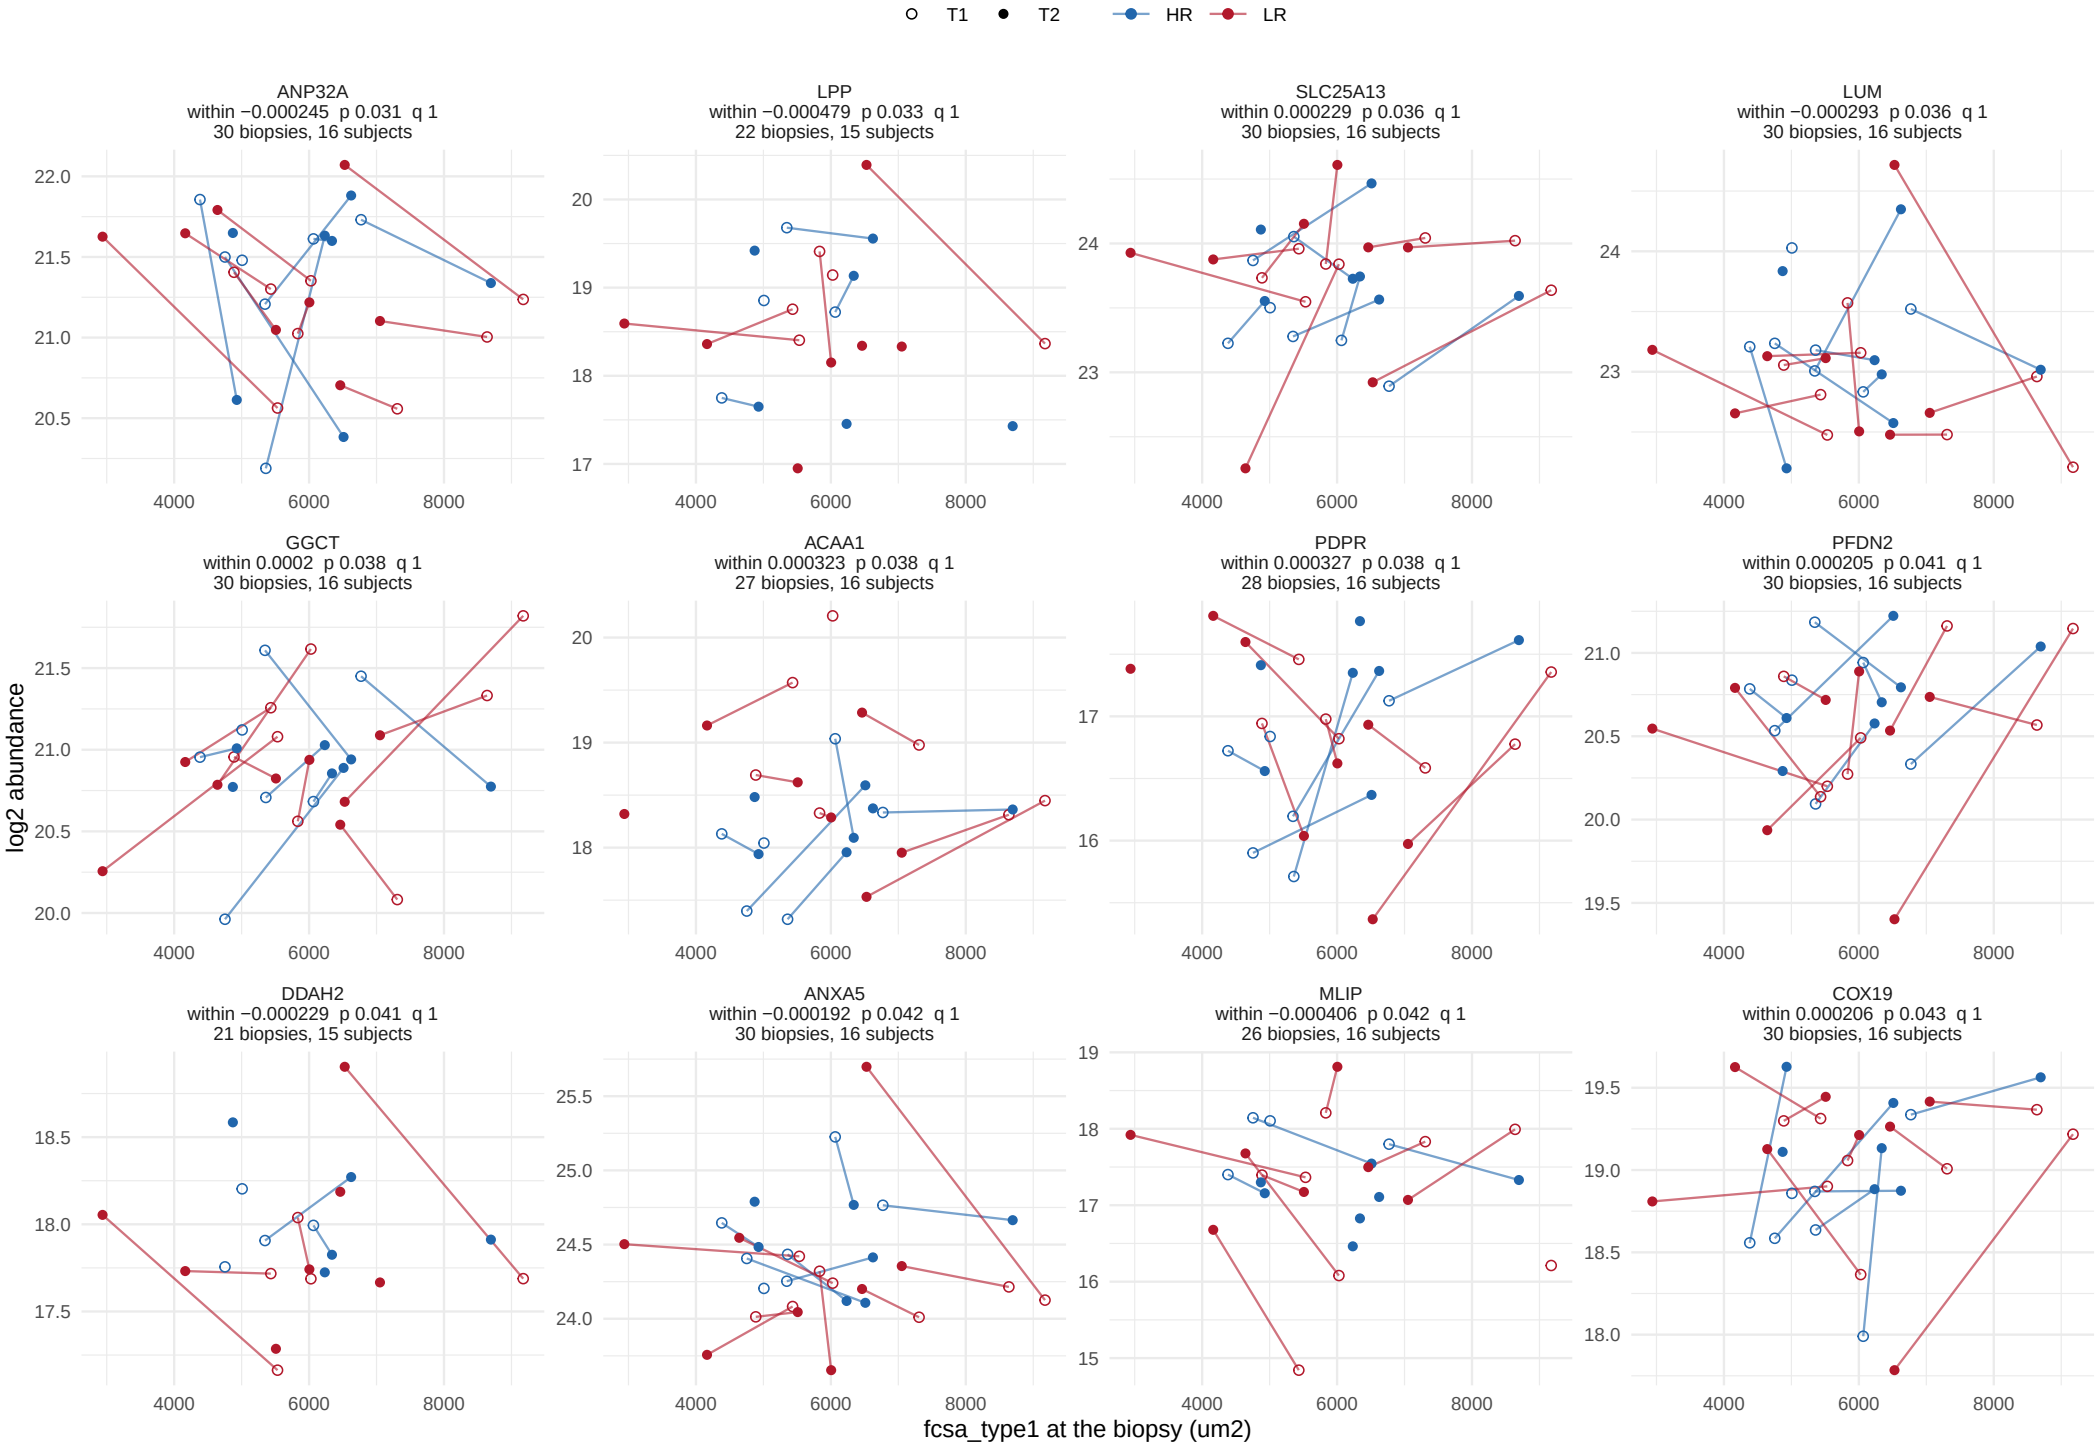

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_type1, within−person term


55 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 5 of 5.

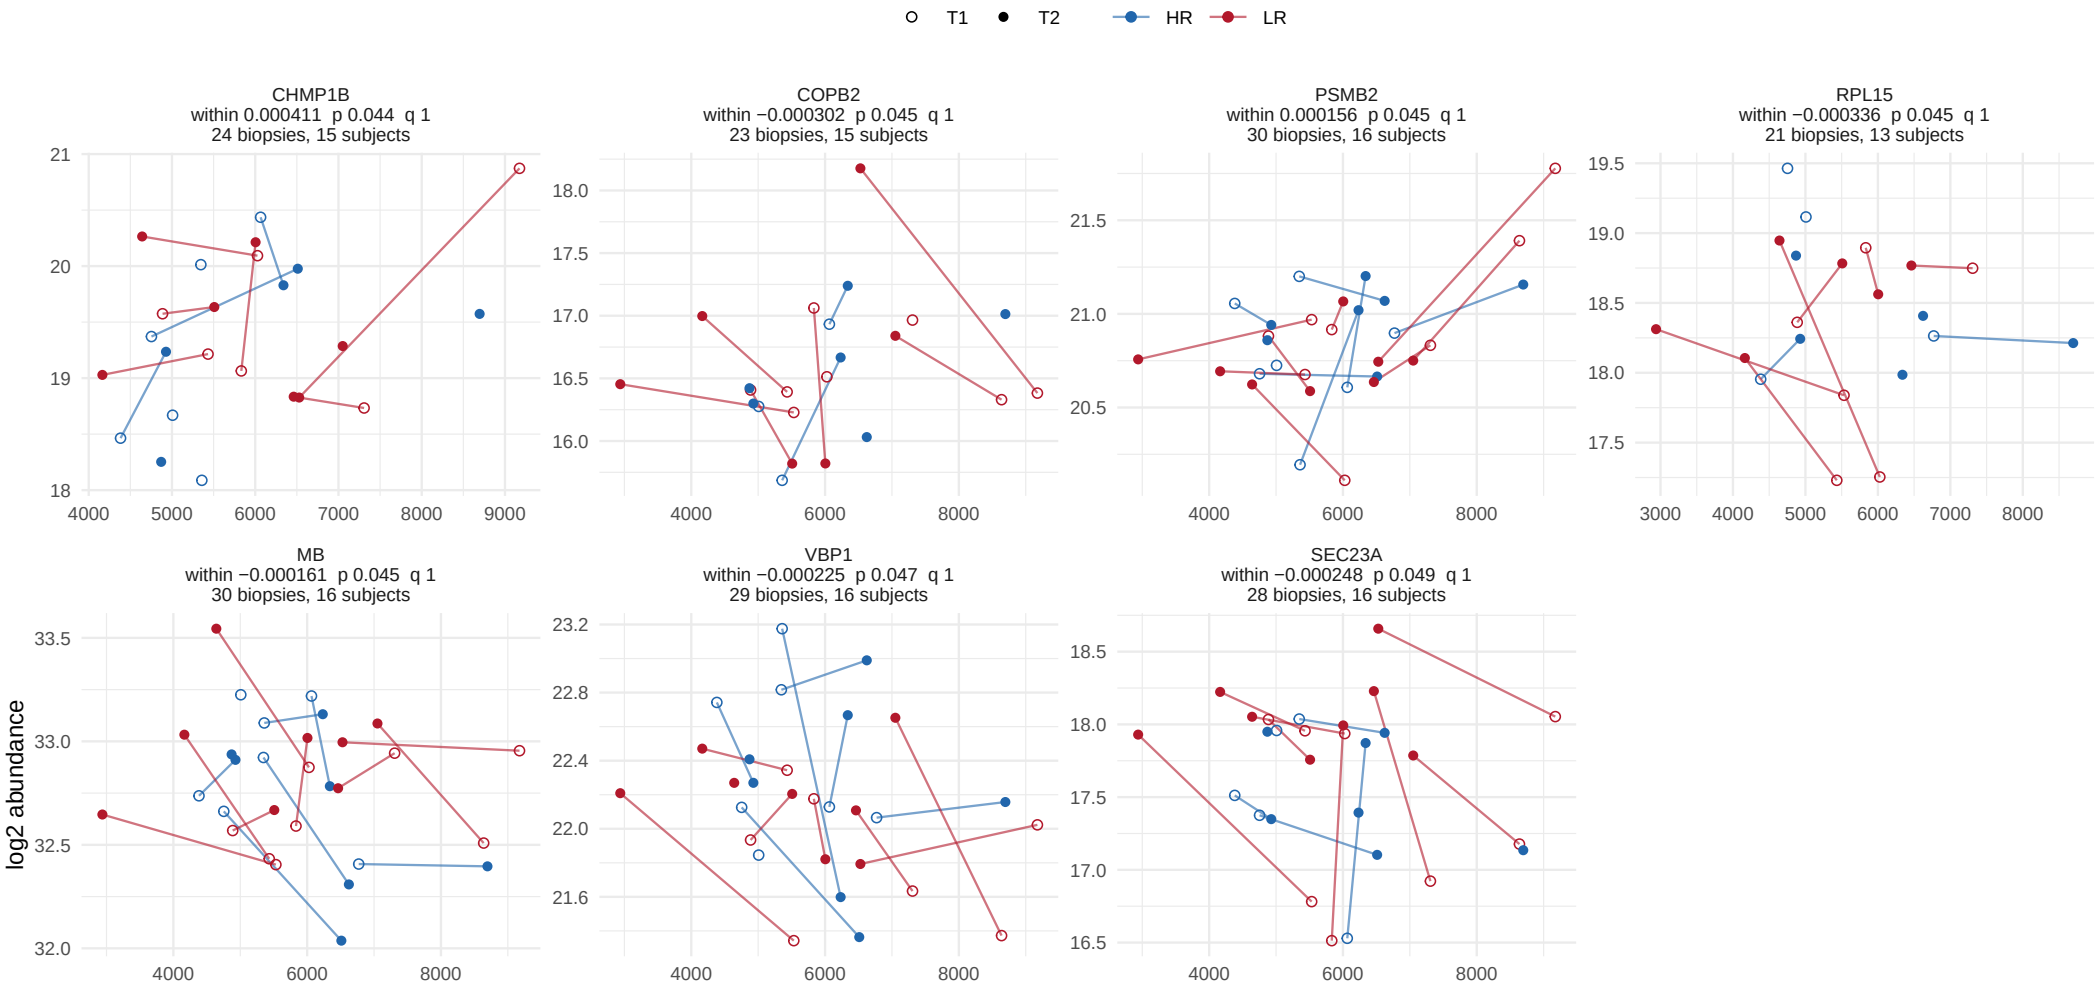

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_type1, between−person term


77 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 1 of 7.

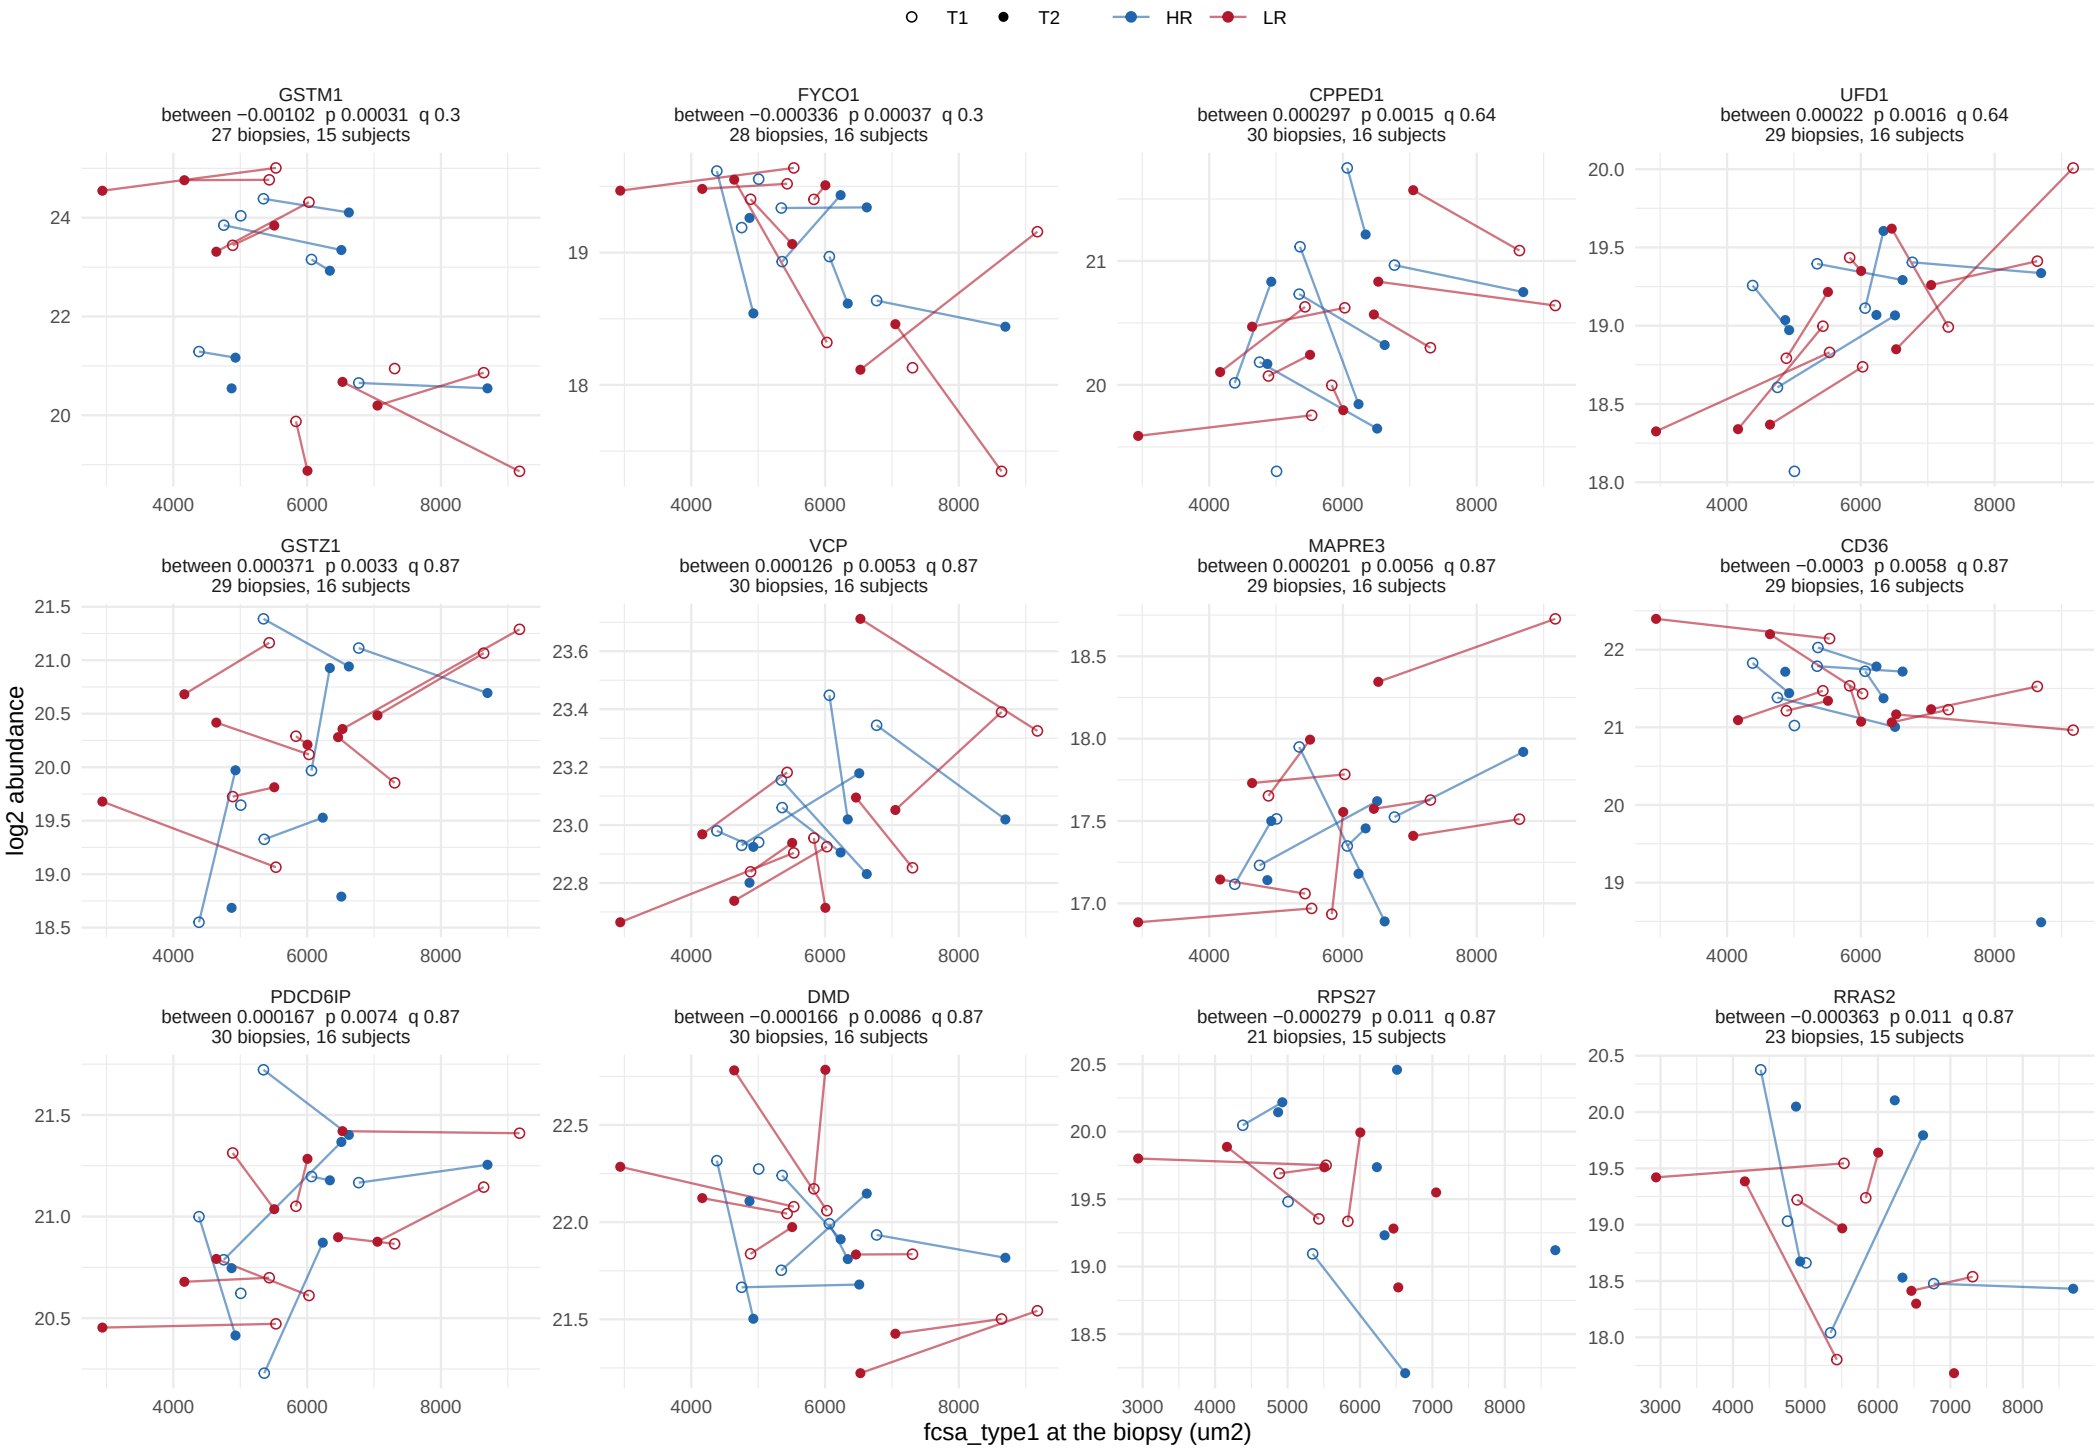

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_type1, between−person term


77 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 2 of 7.

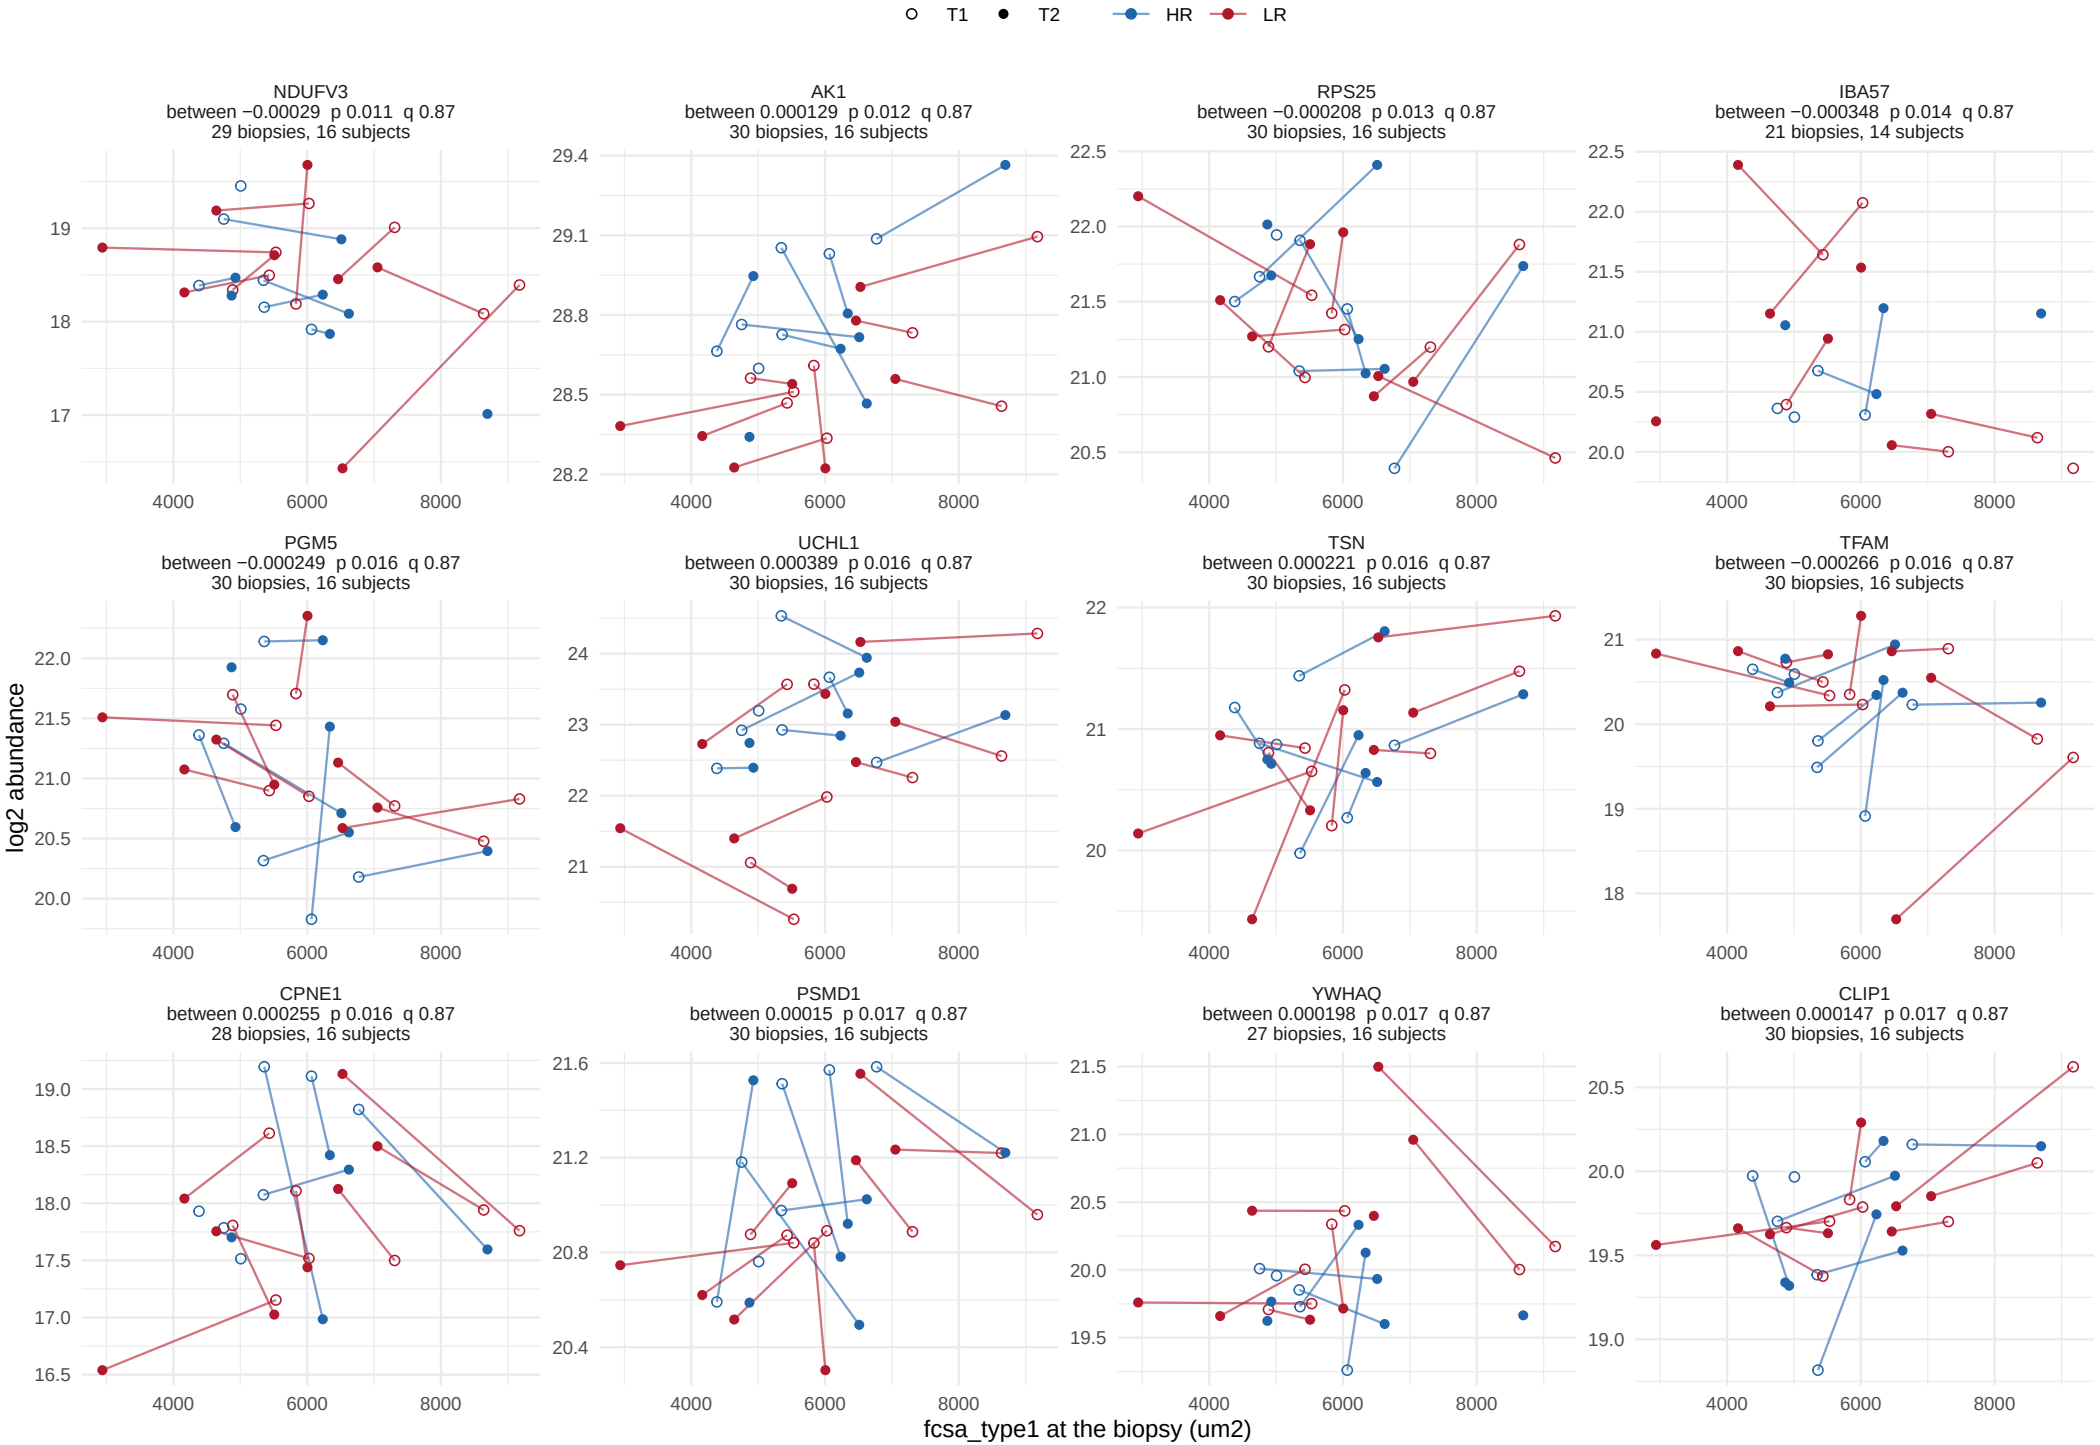

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_type1, between−person term


77 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 3 of 7.

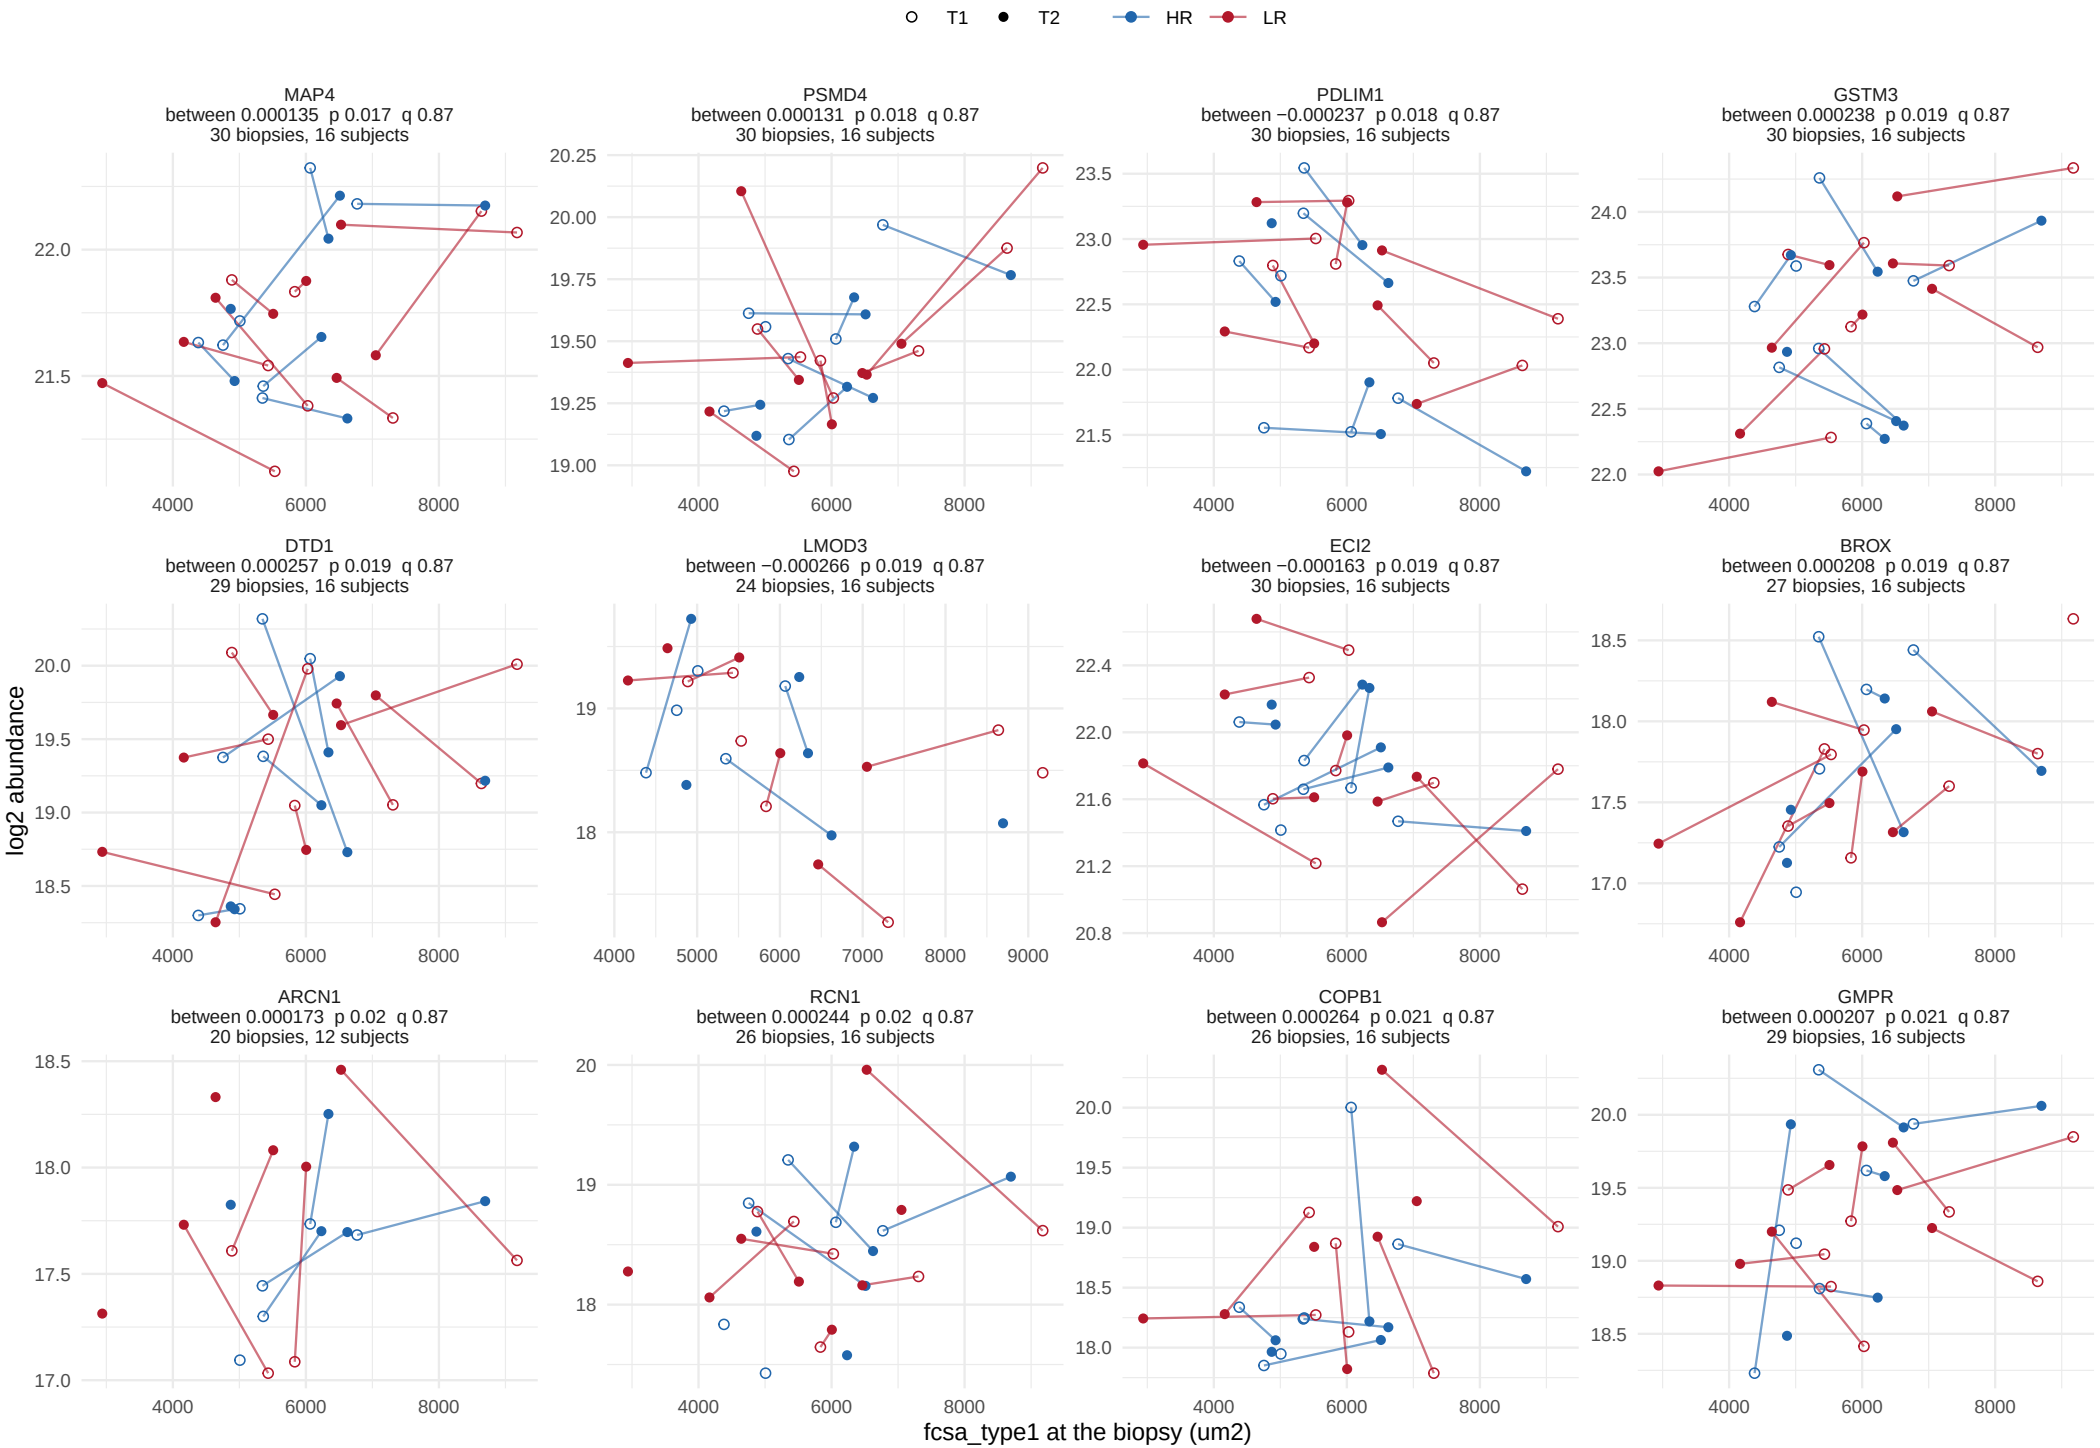

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_type1, between−person term


77 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 4 of 7.

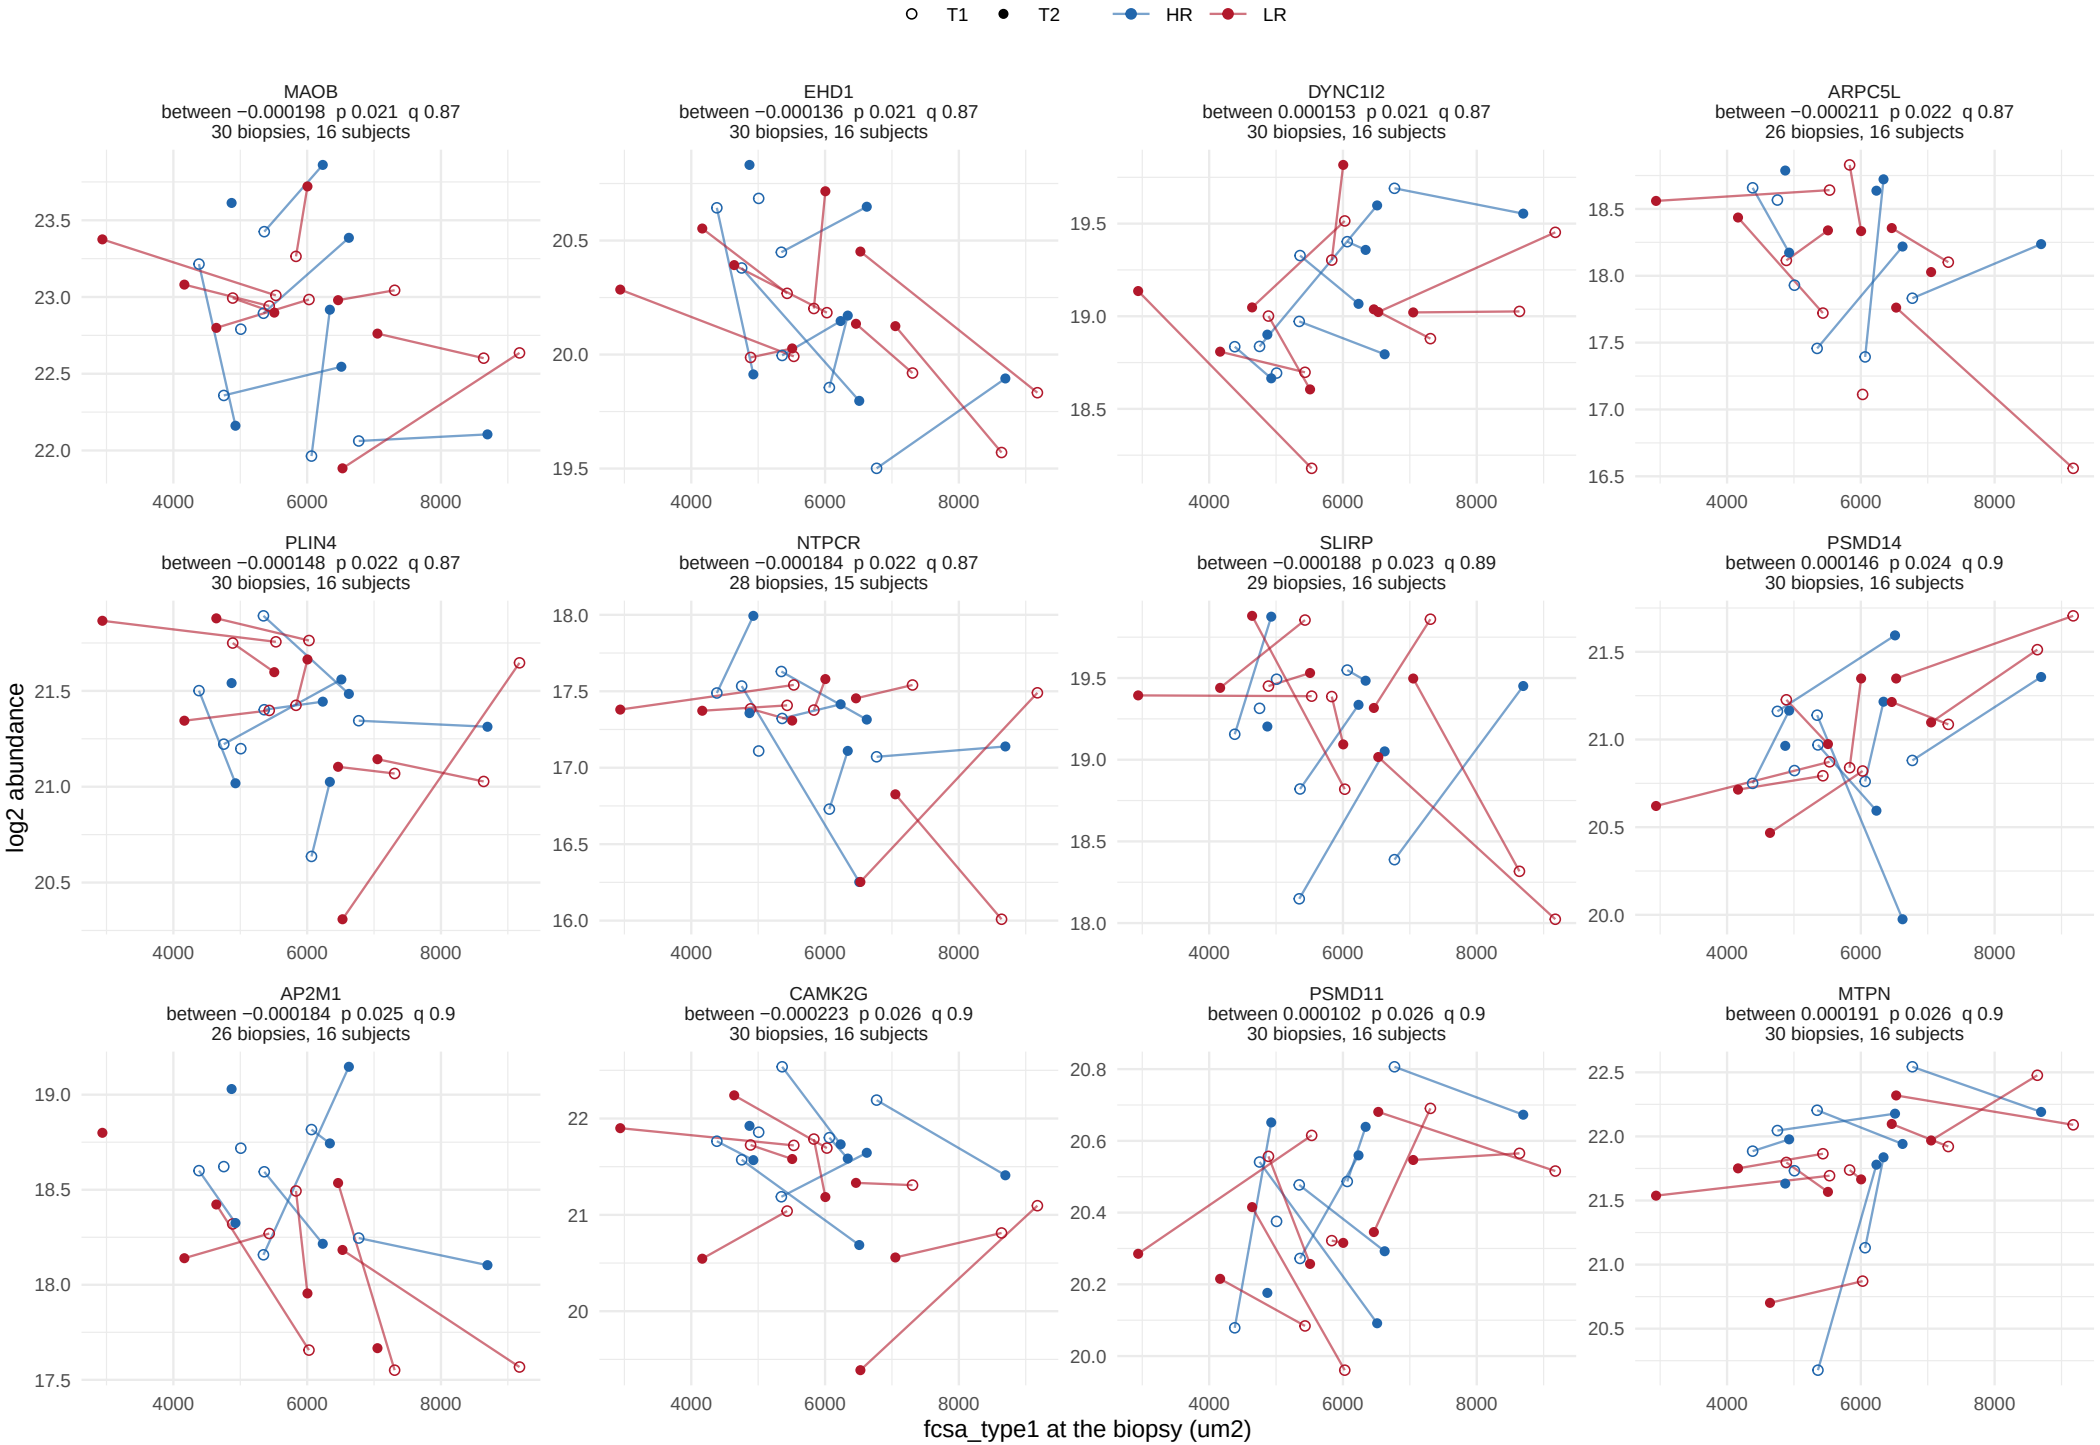

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_type1, between−person term


77 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 5 of 7.

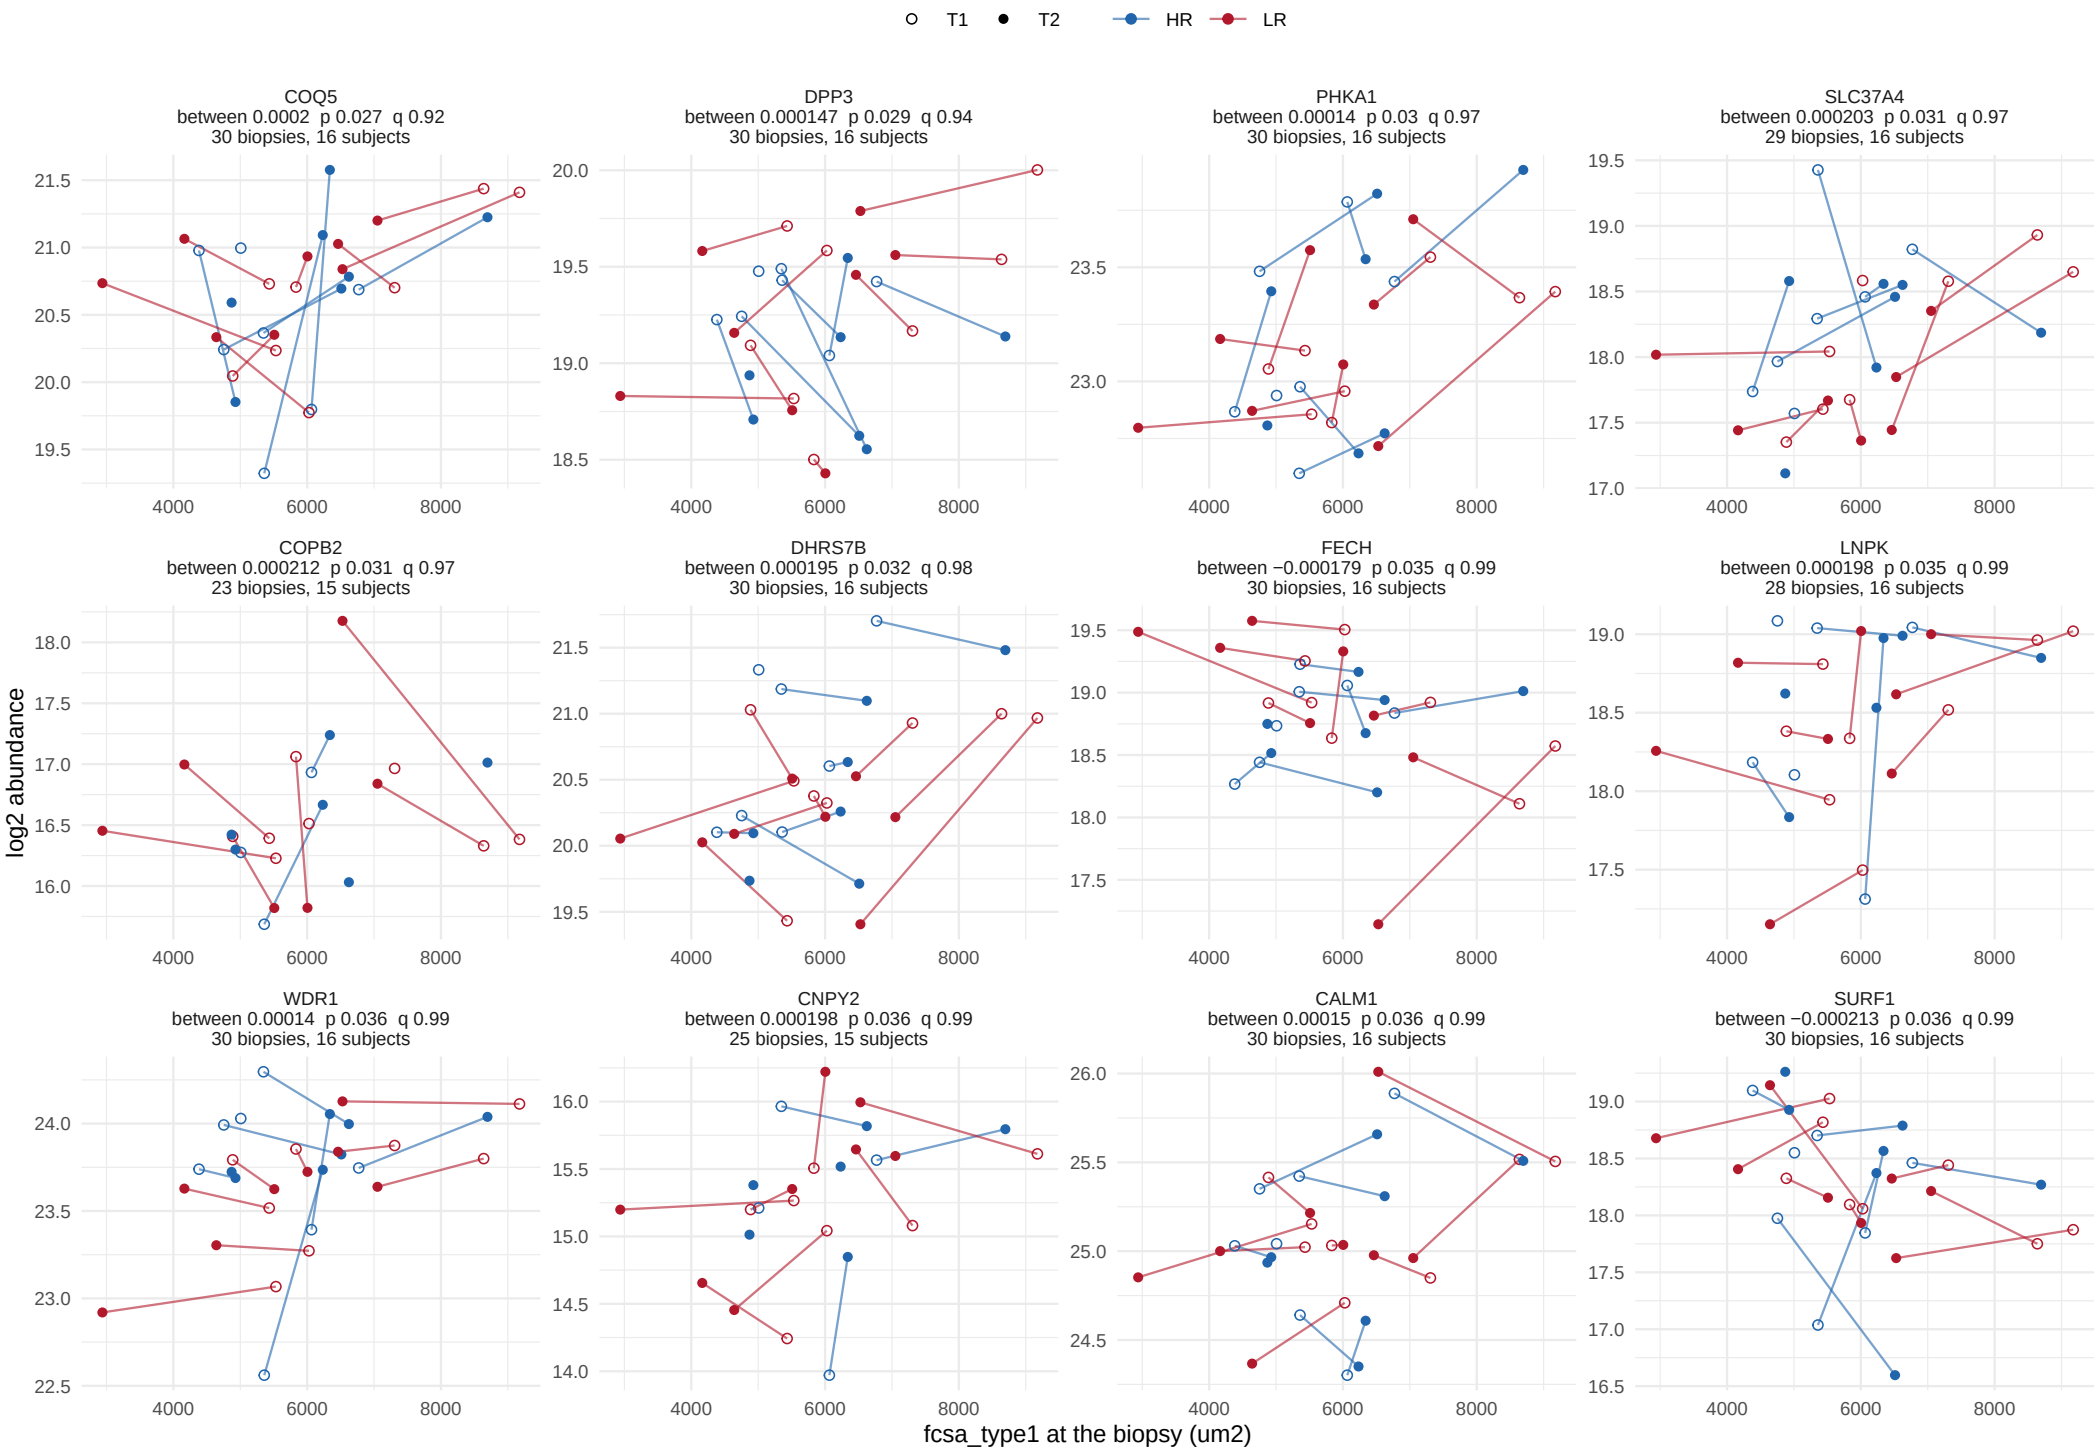

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_type1, between−person term


77 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 6 of 7.

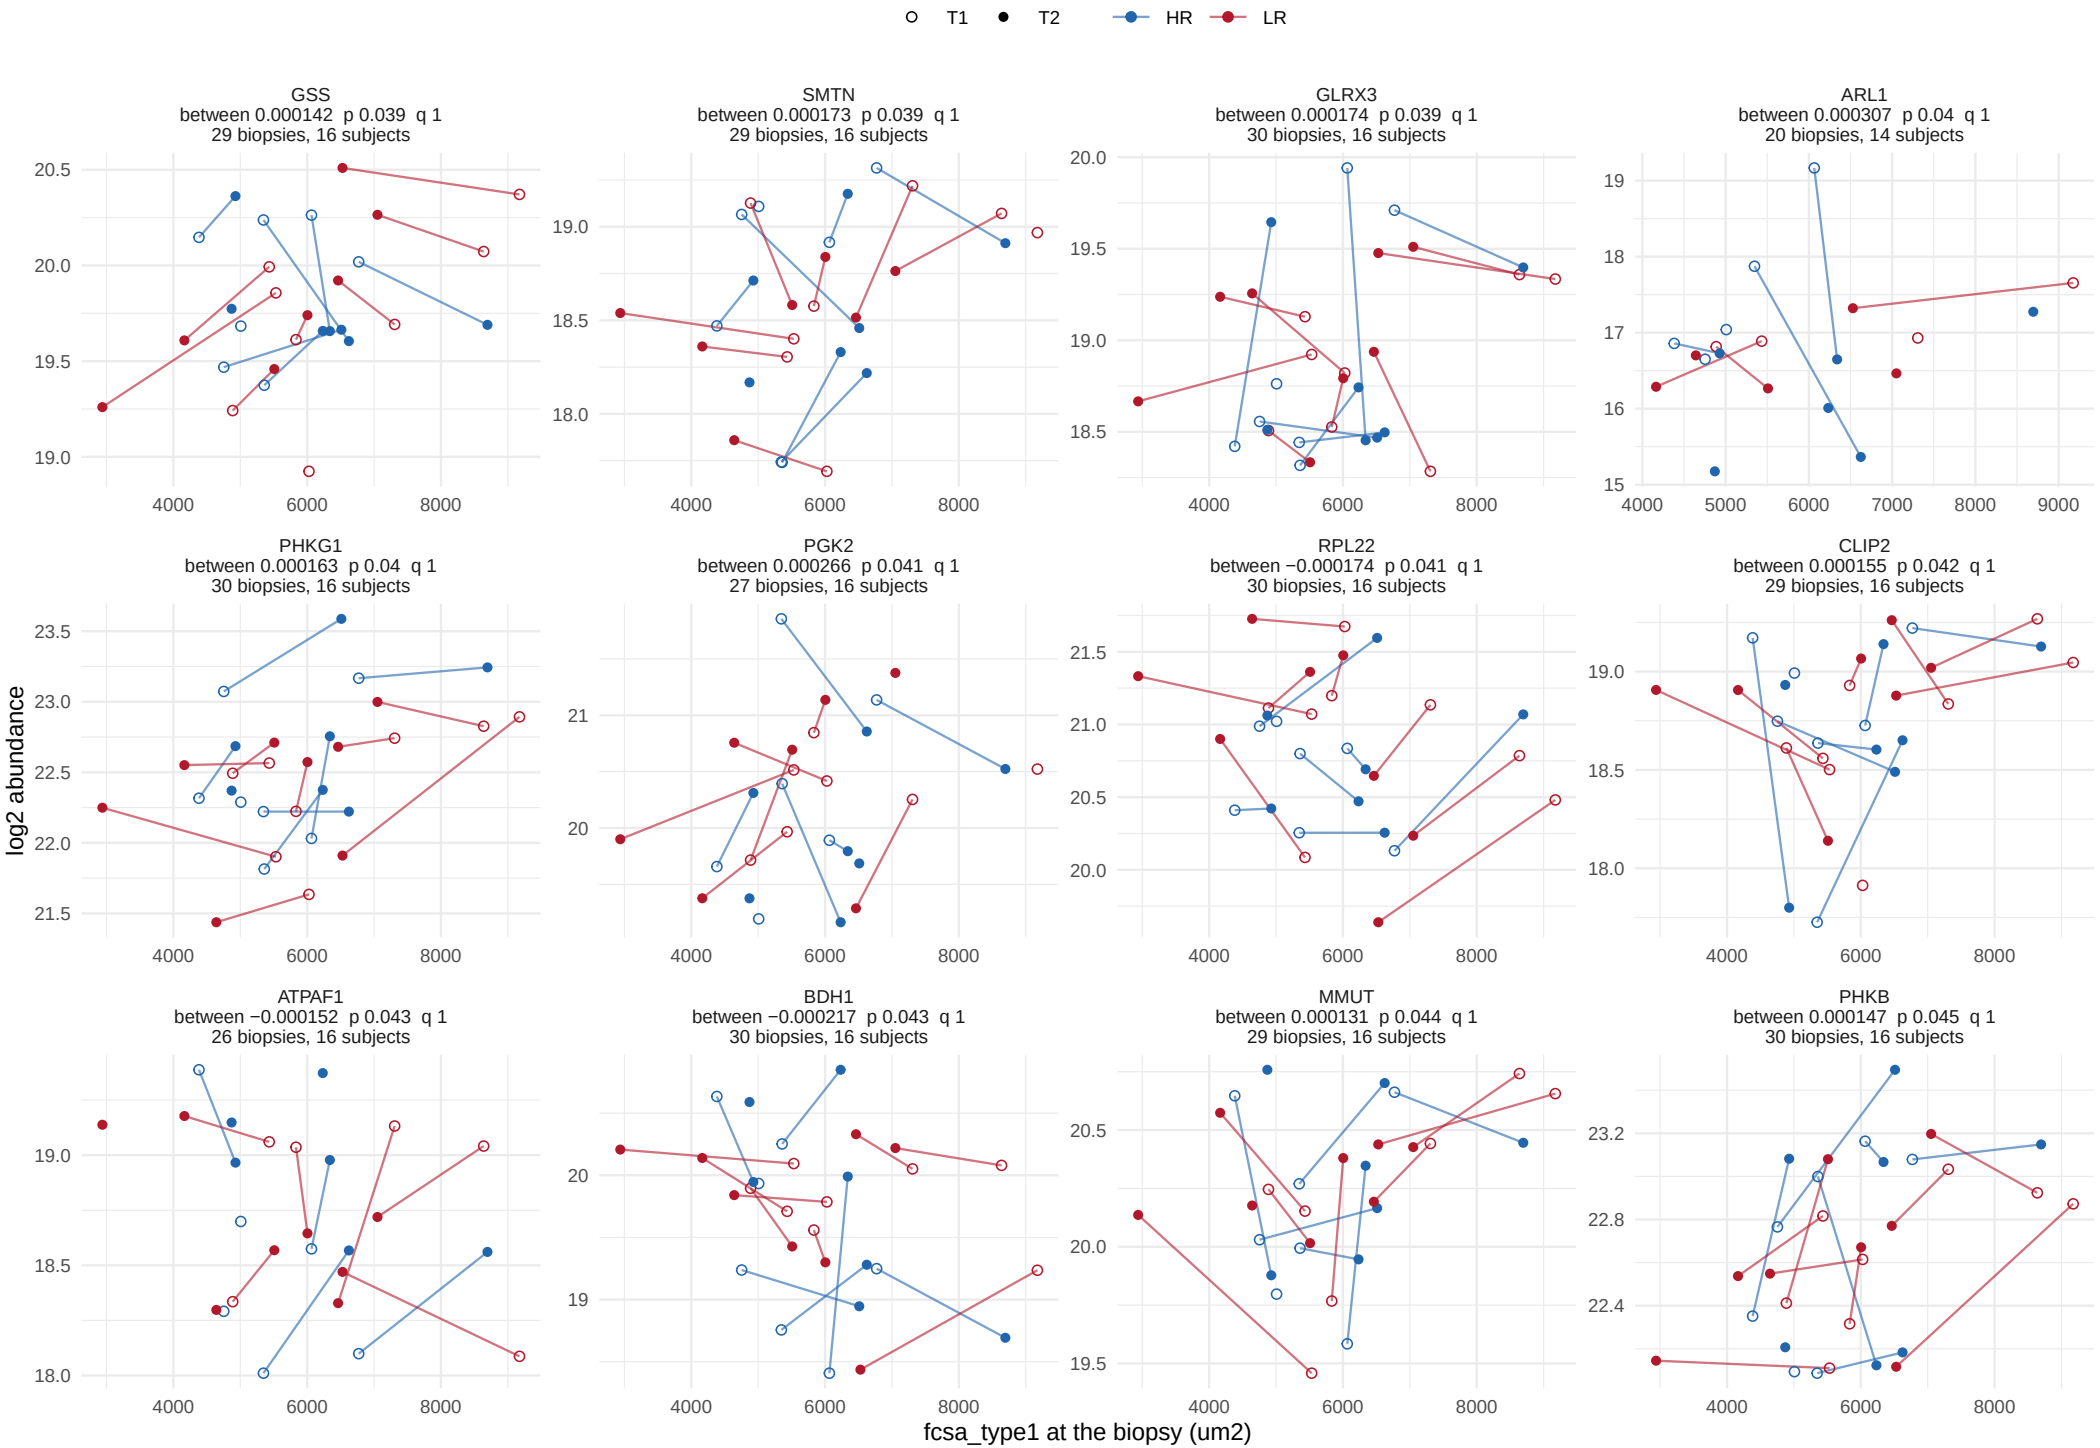

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_type1, between−person term


77 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 7 of 7.

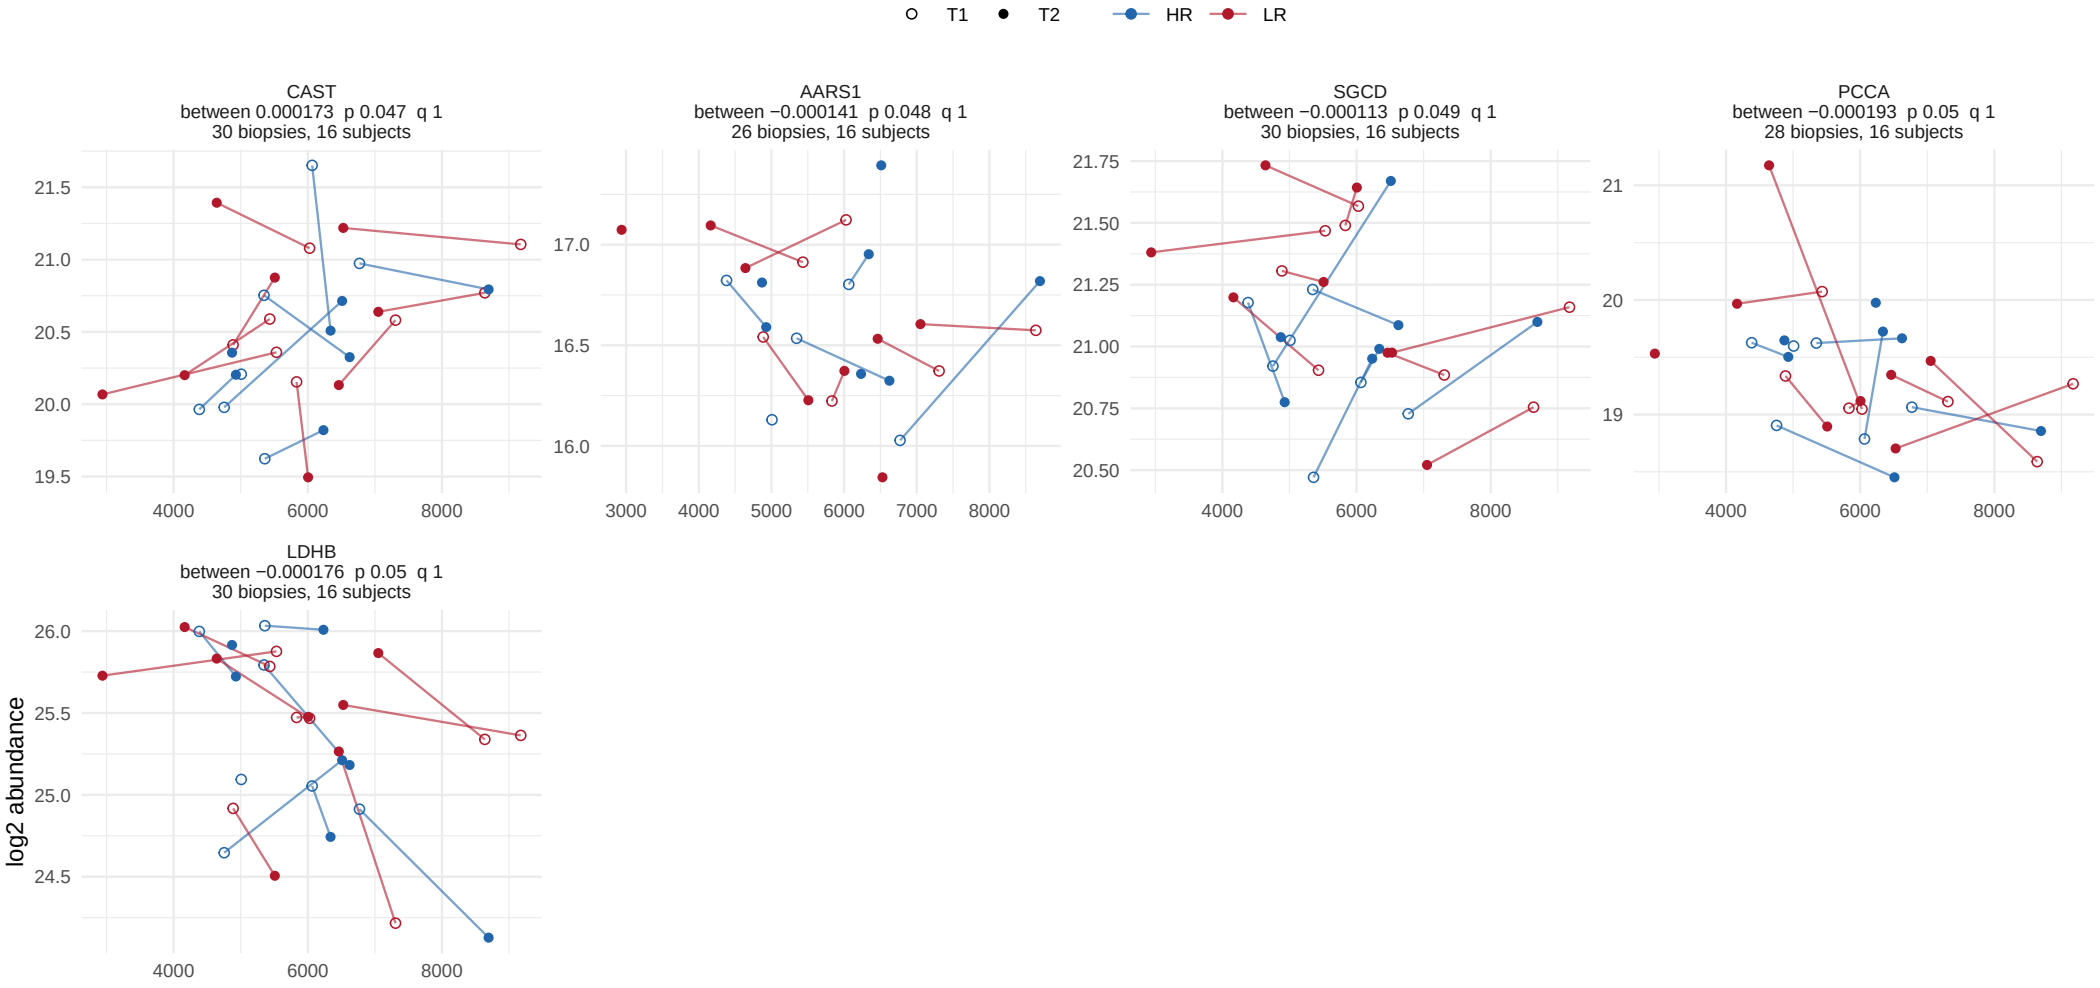

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_type2, within−person term


66 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 1 of 6.

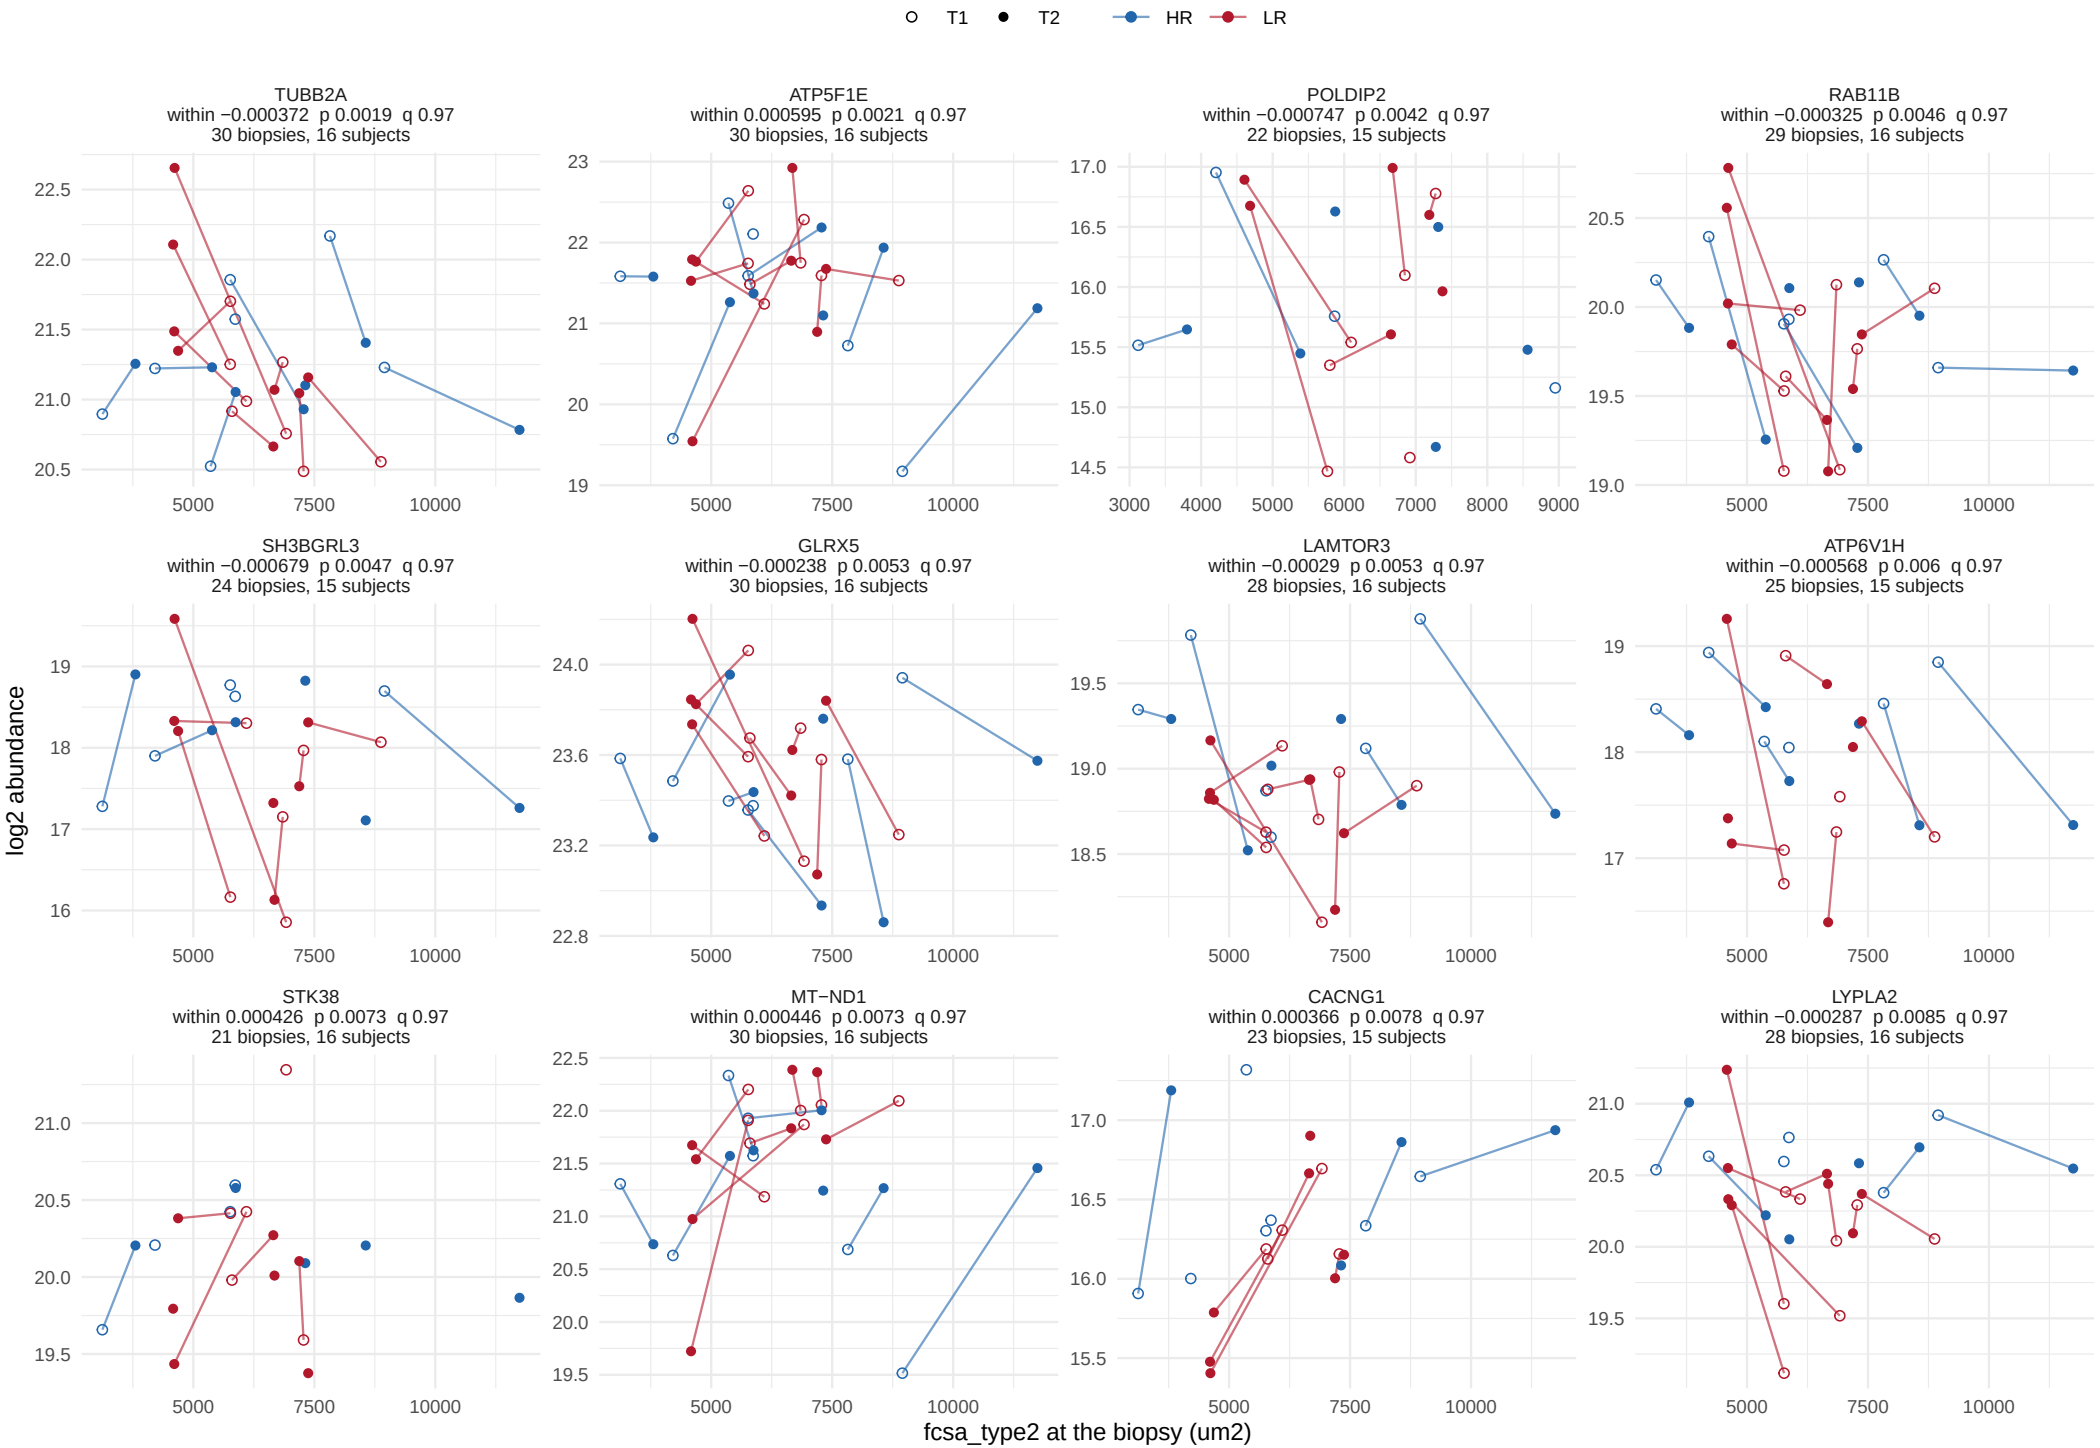

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_type2, within−person term


66 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 2 of 6.

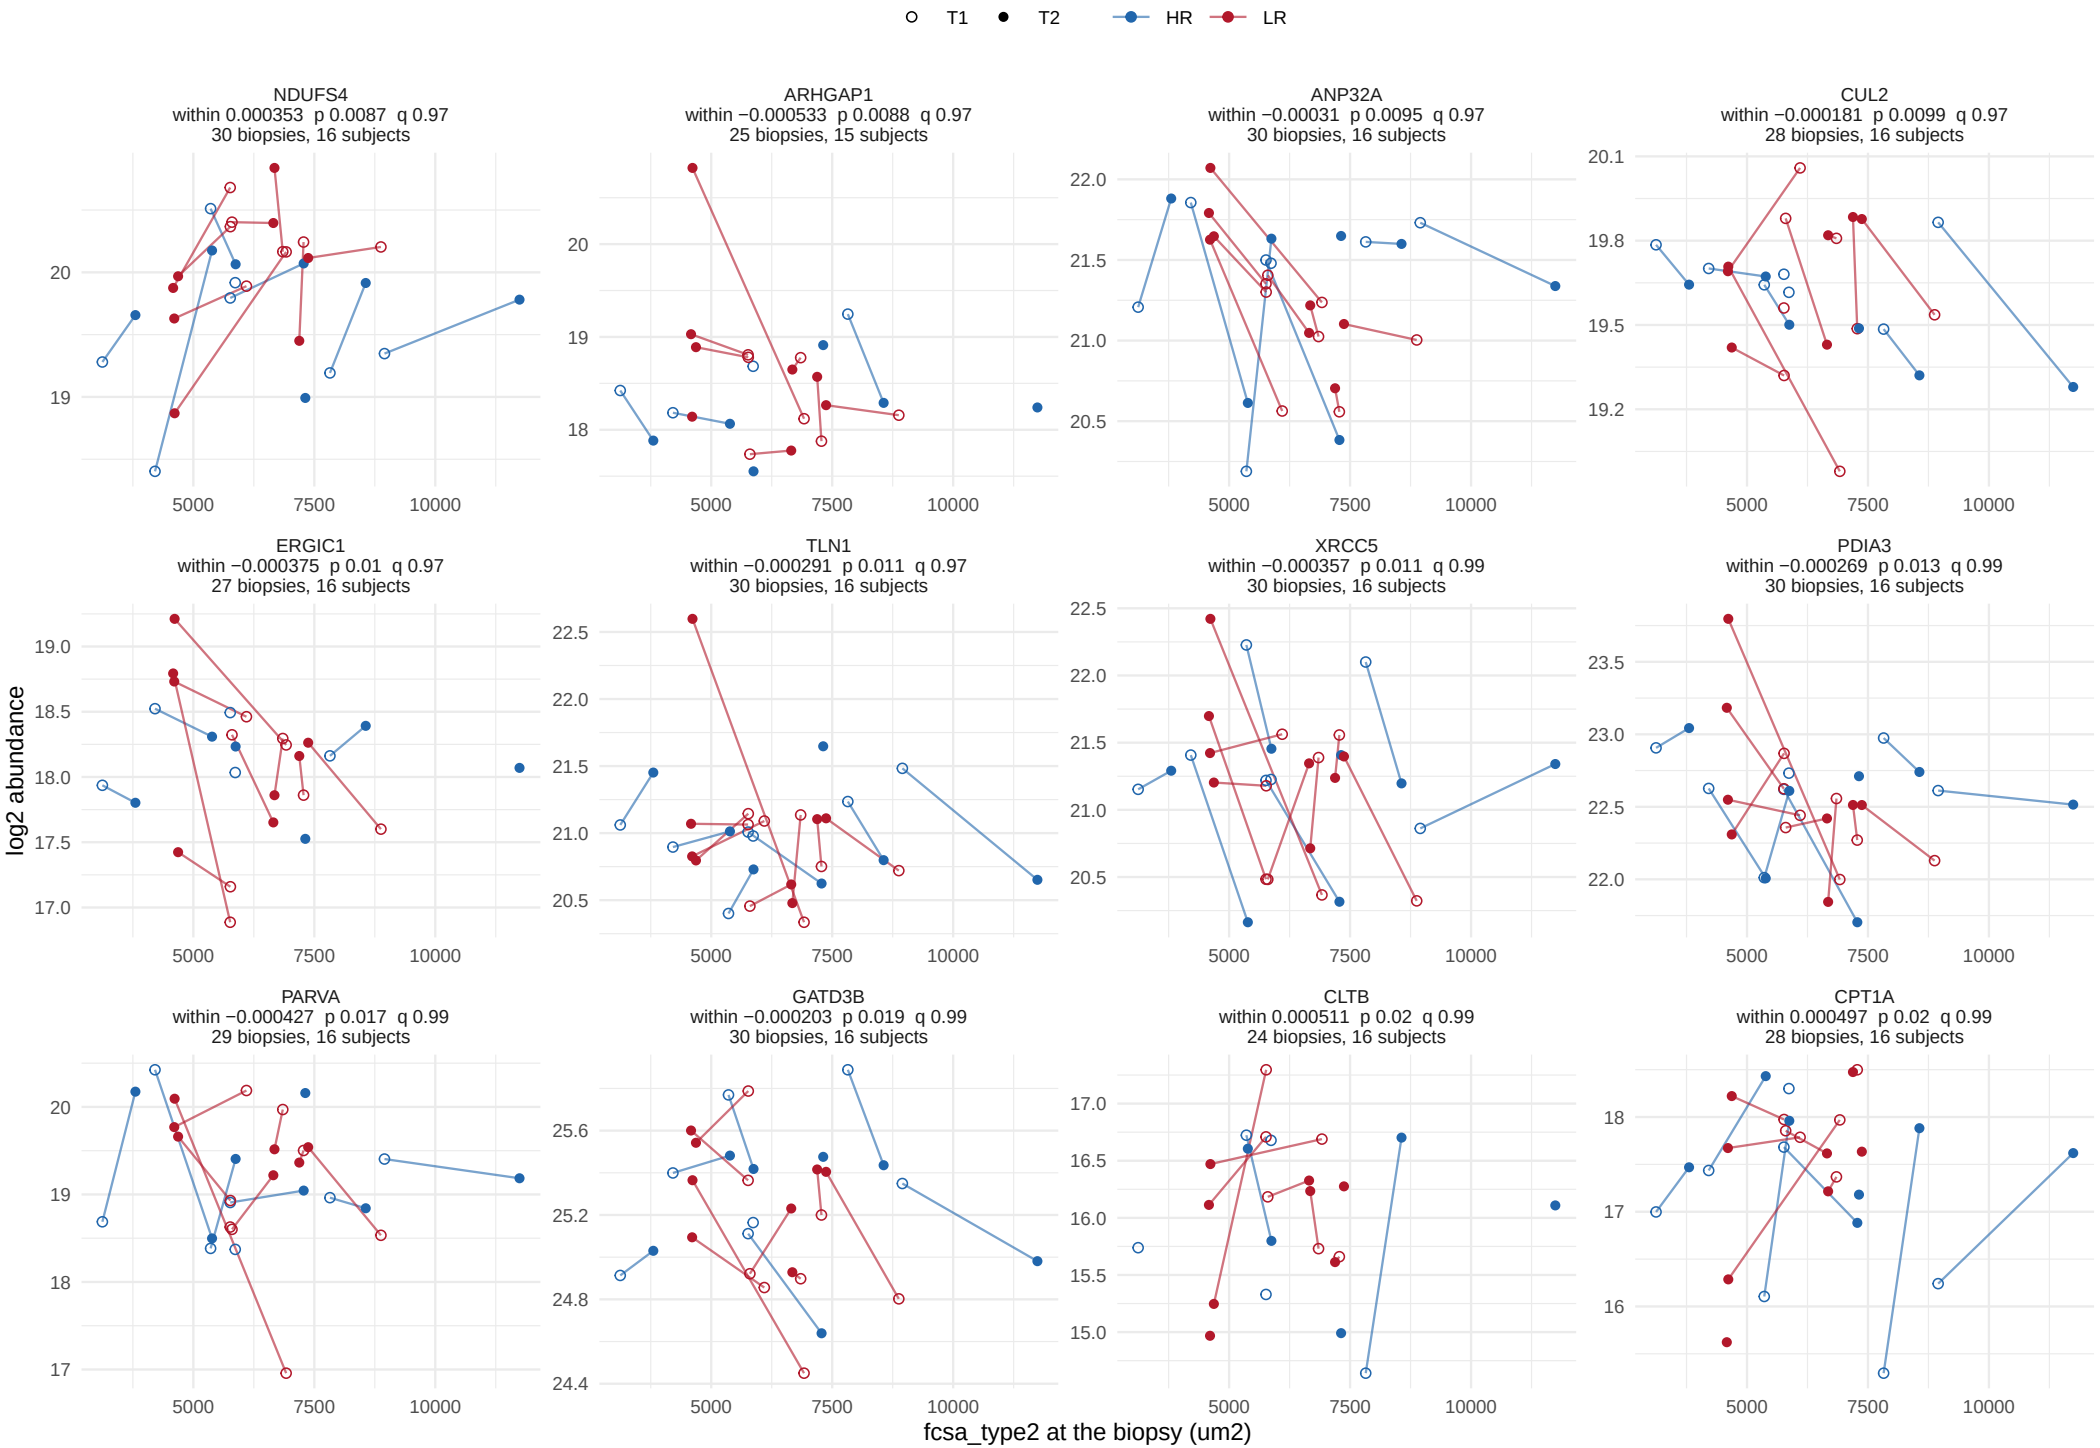

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_type2, within−person term


66 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 3 of 6.

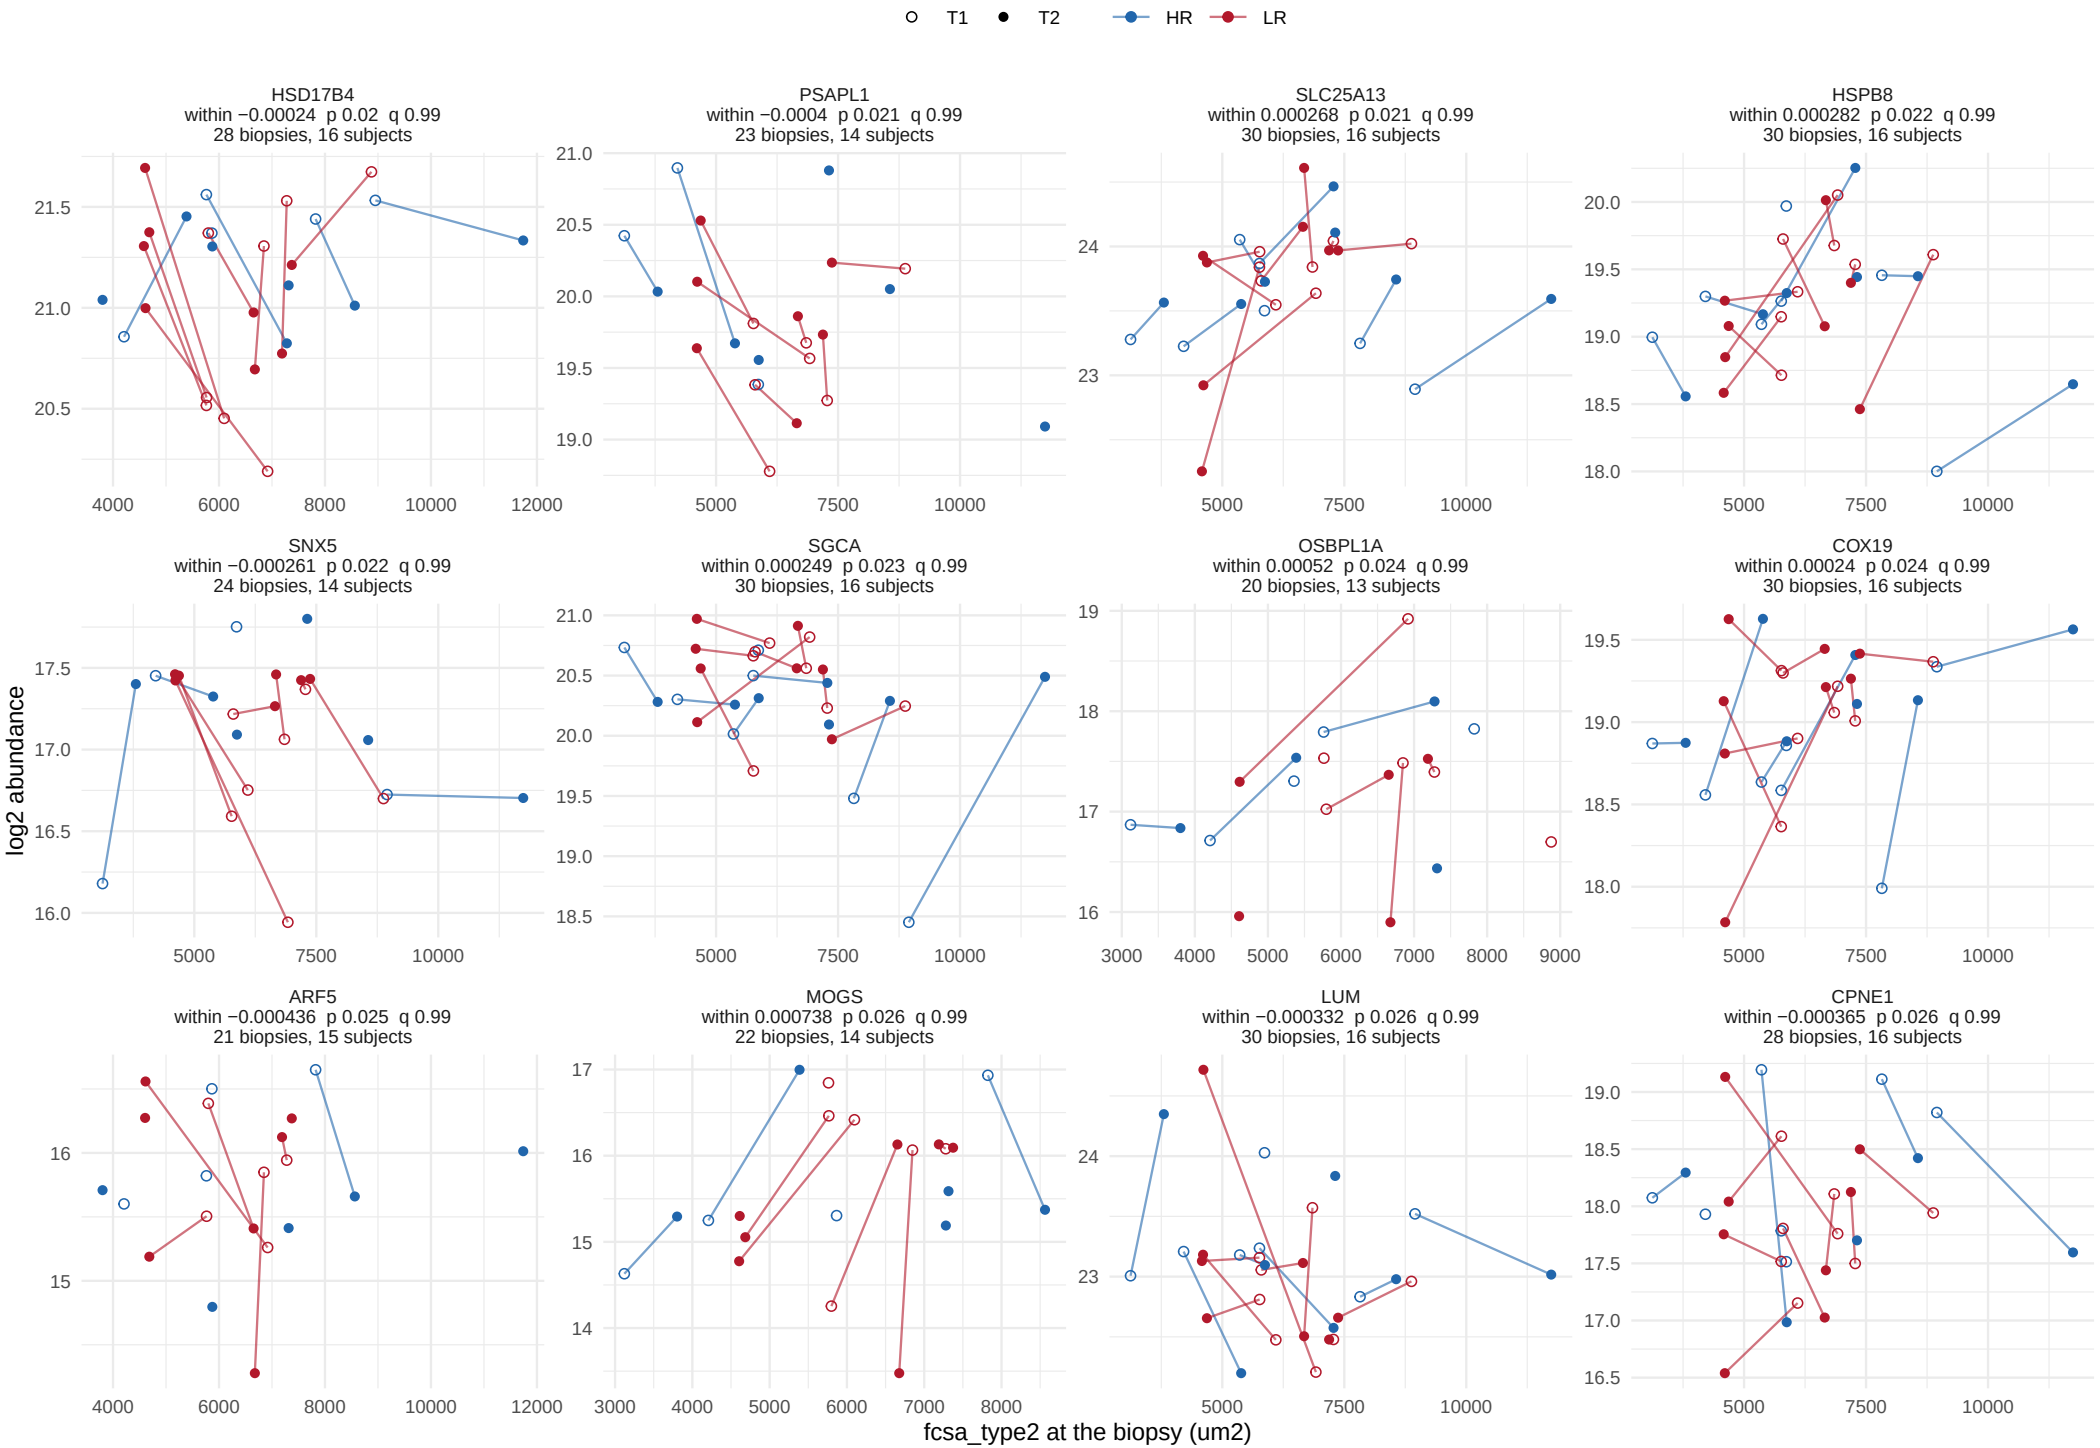

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_type2, within−person term


66 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 4 of 6.

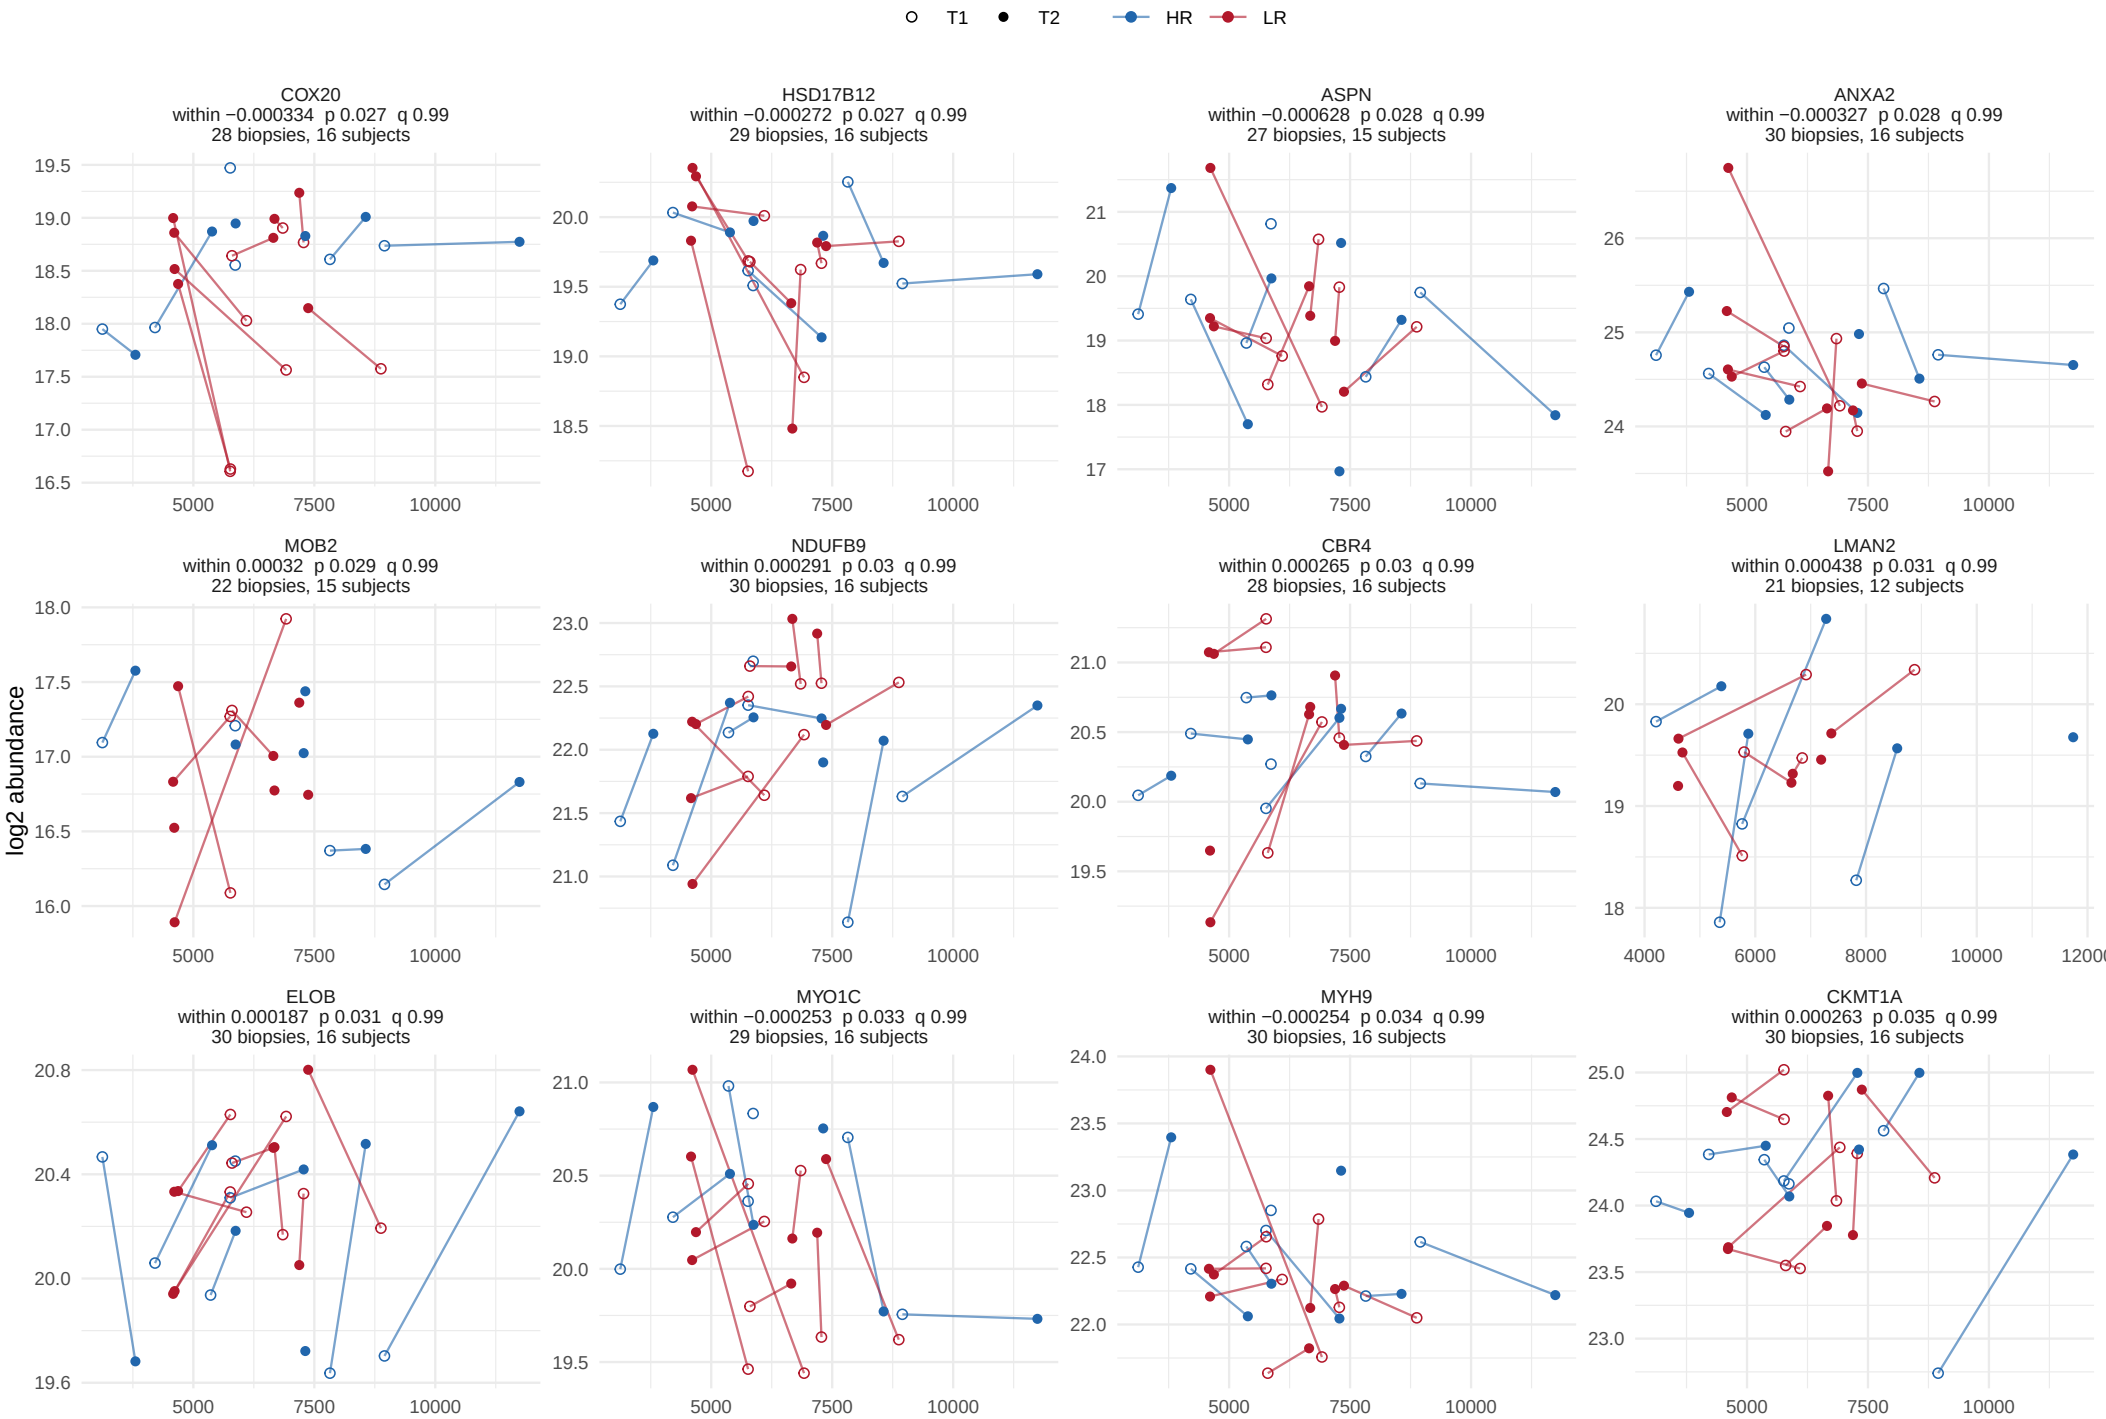

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_type2, within−person term


66 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 5 of 6.

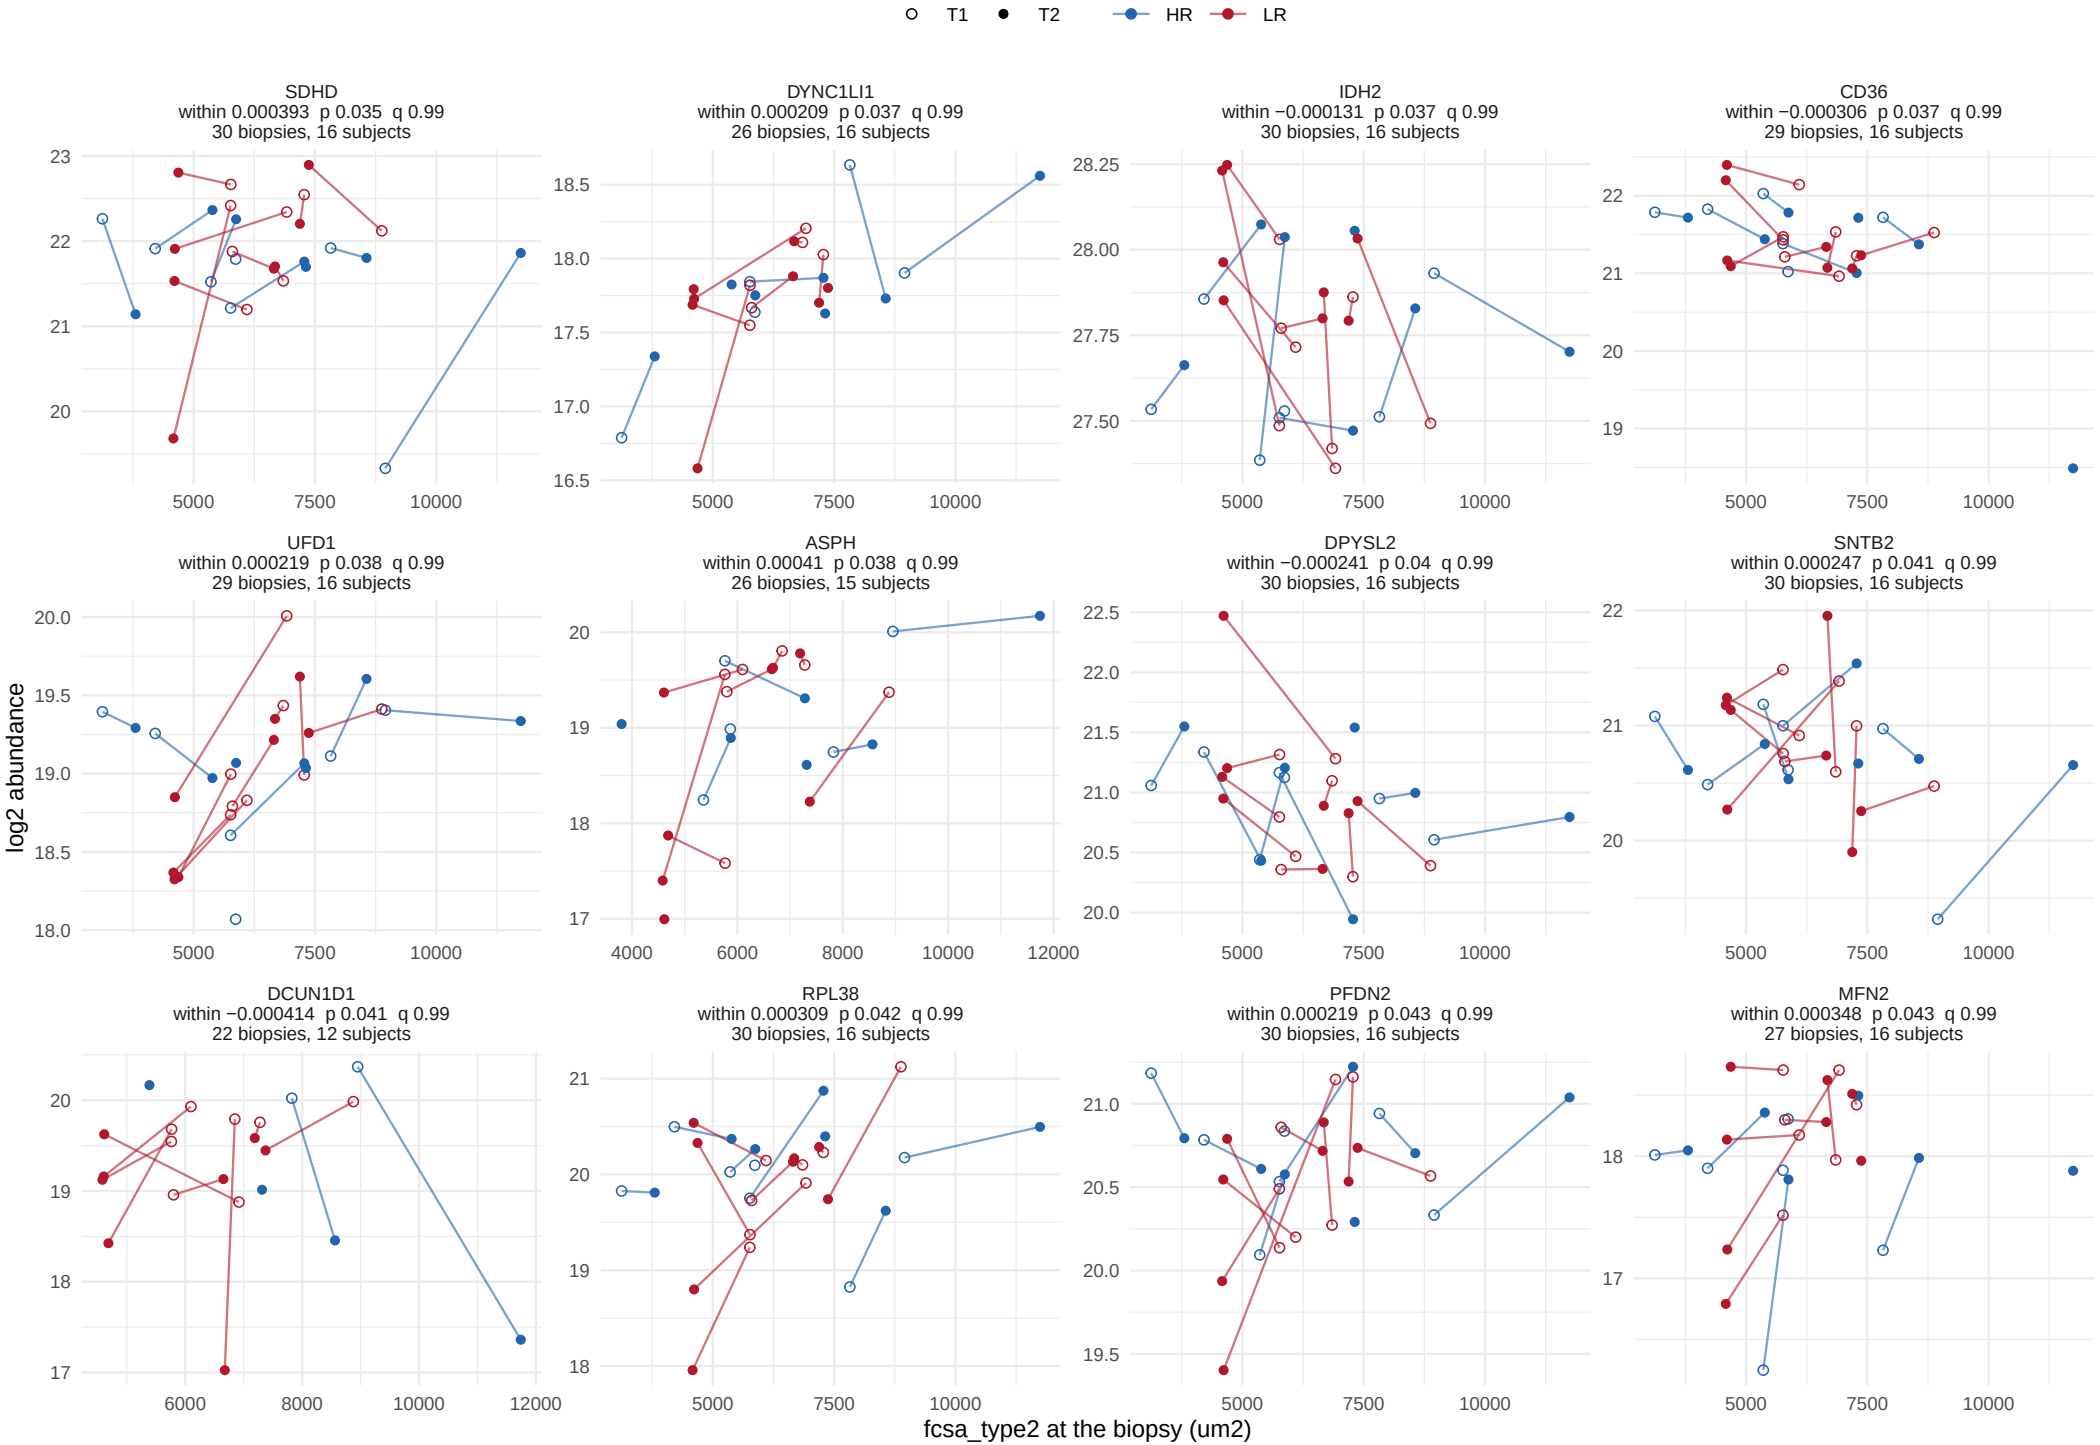

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_type2, within−person term


66 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 6 of 6.

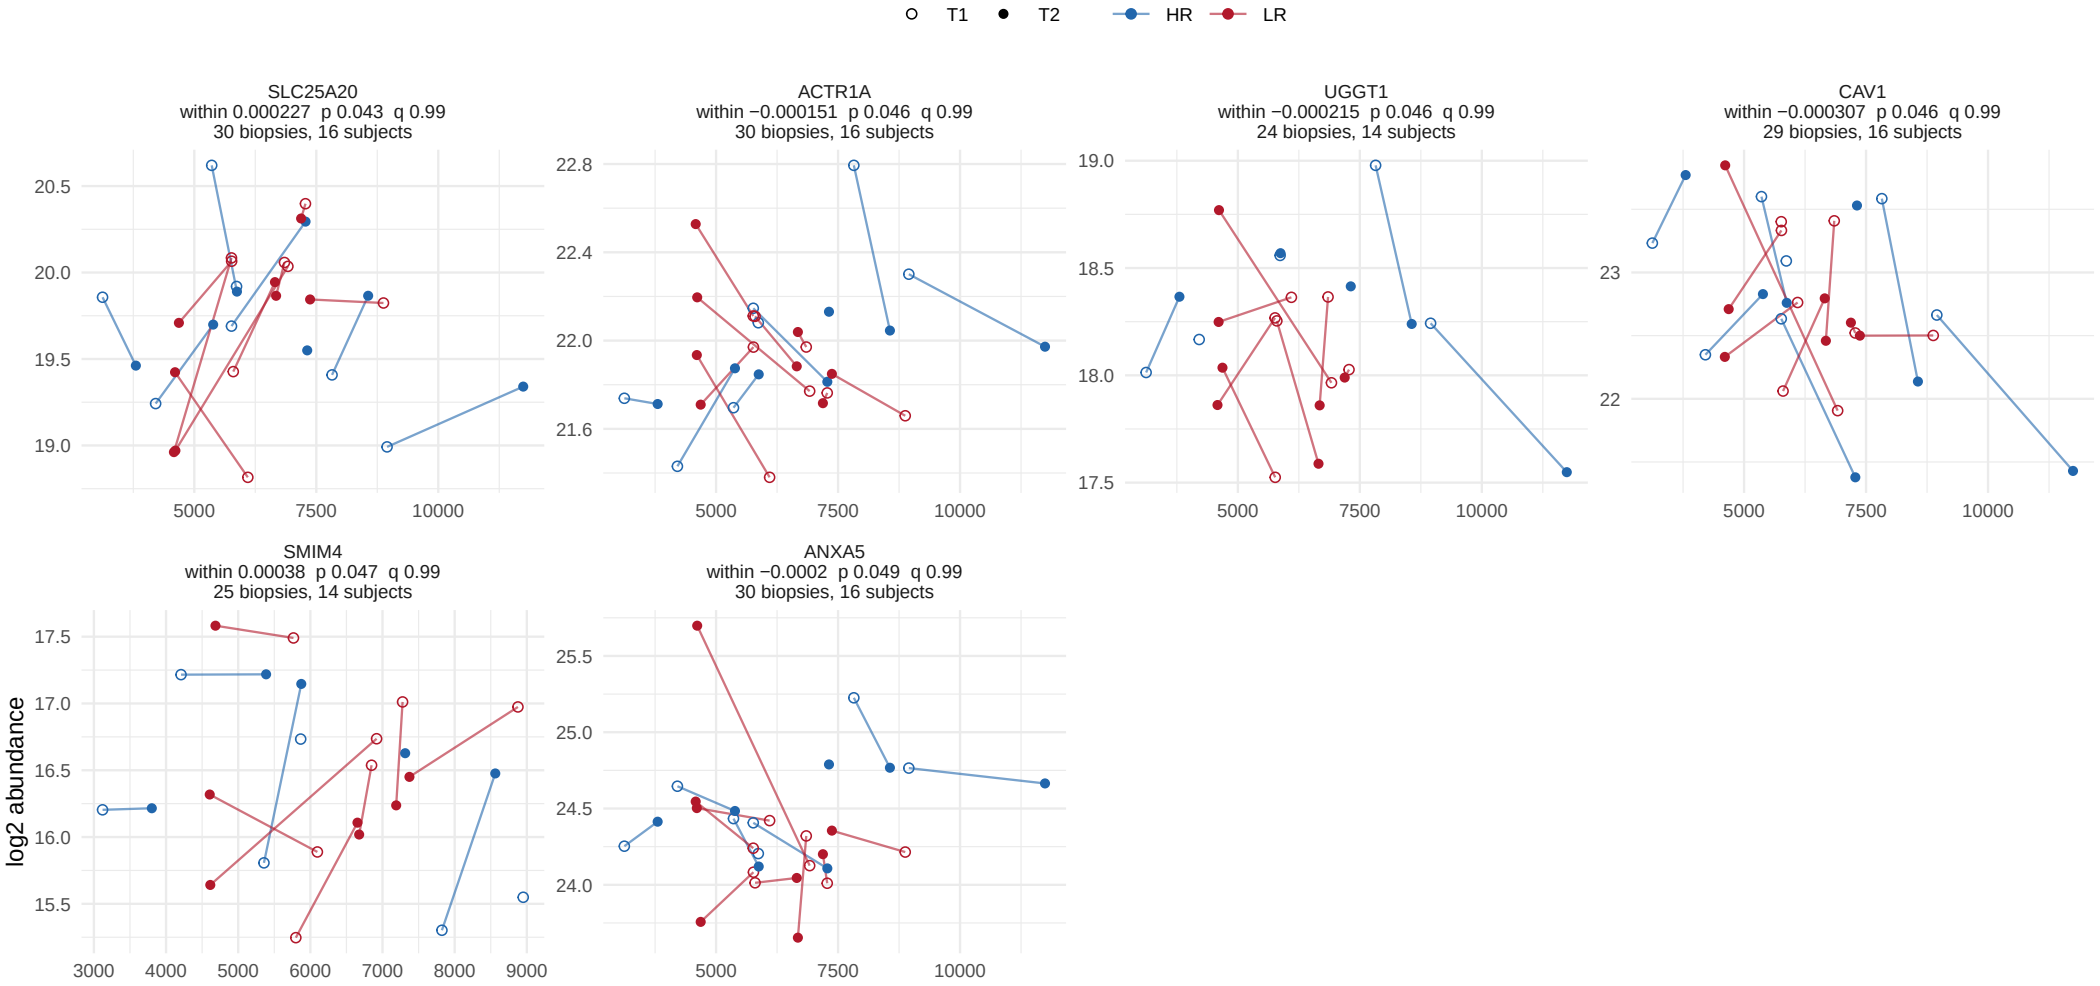

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_type2, between−person term

74 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 1 of 7.

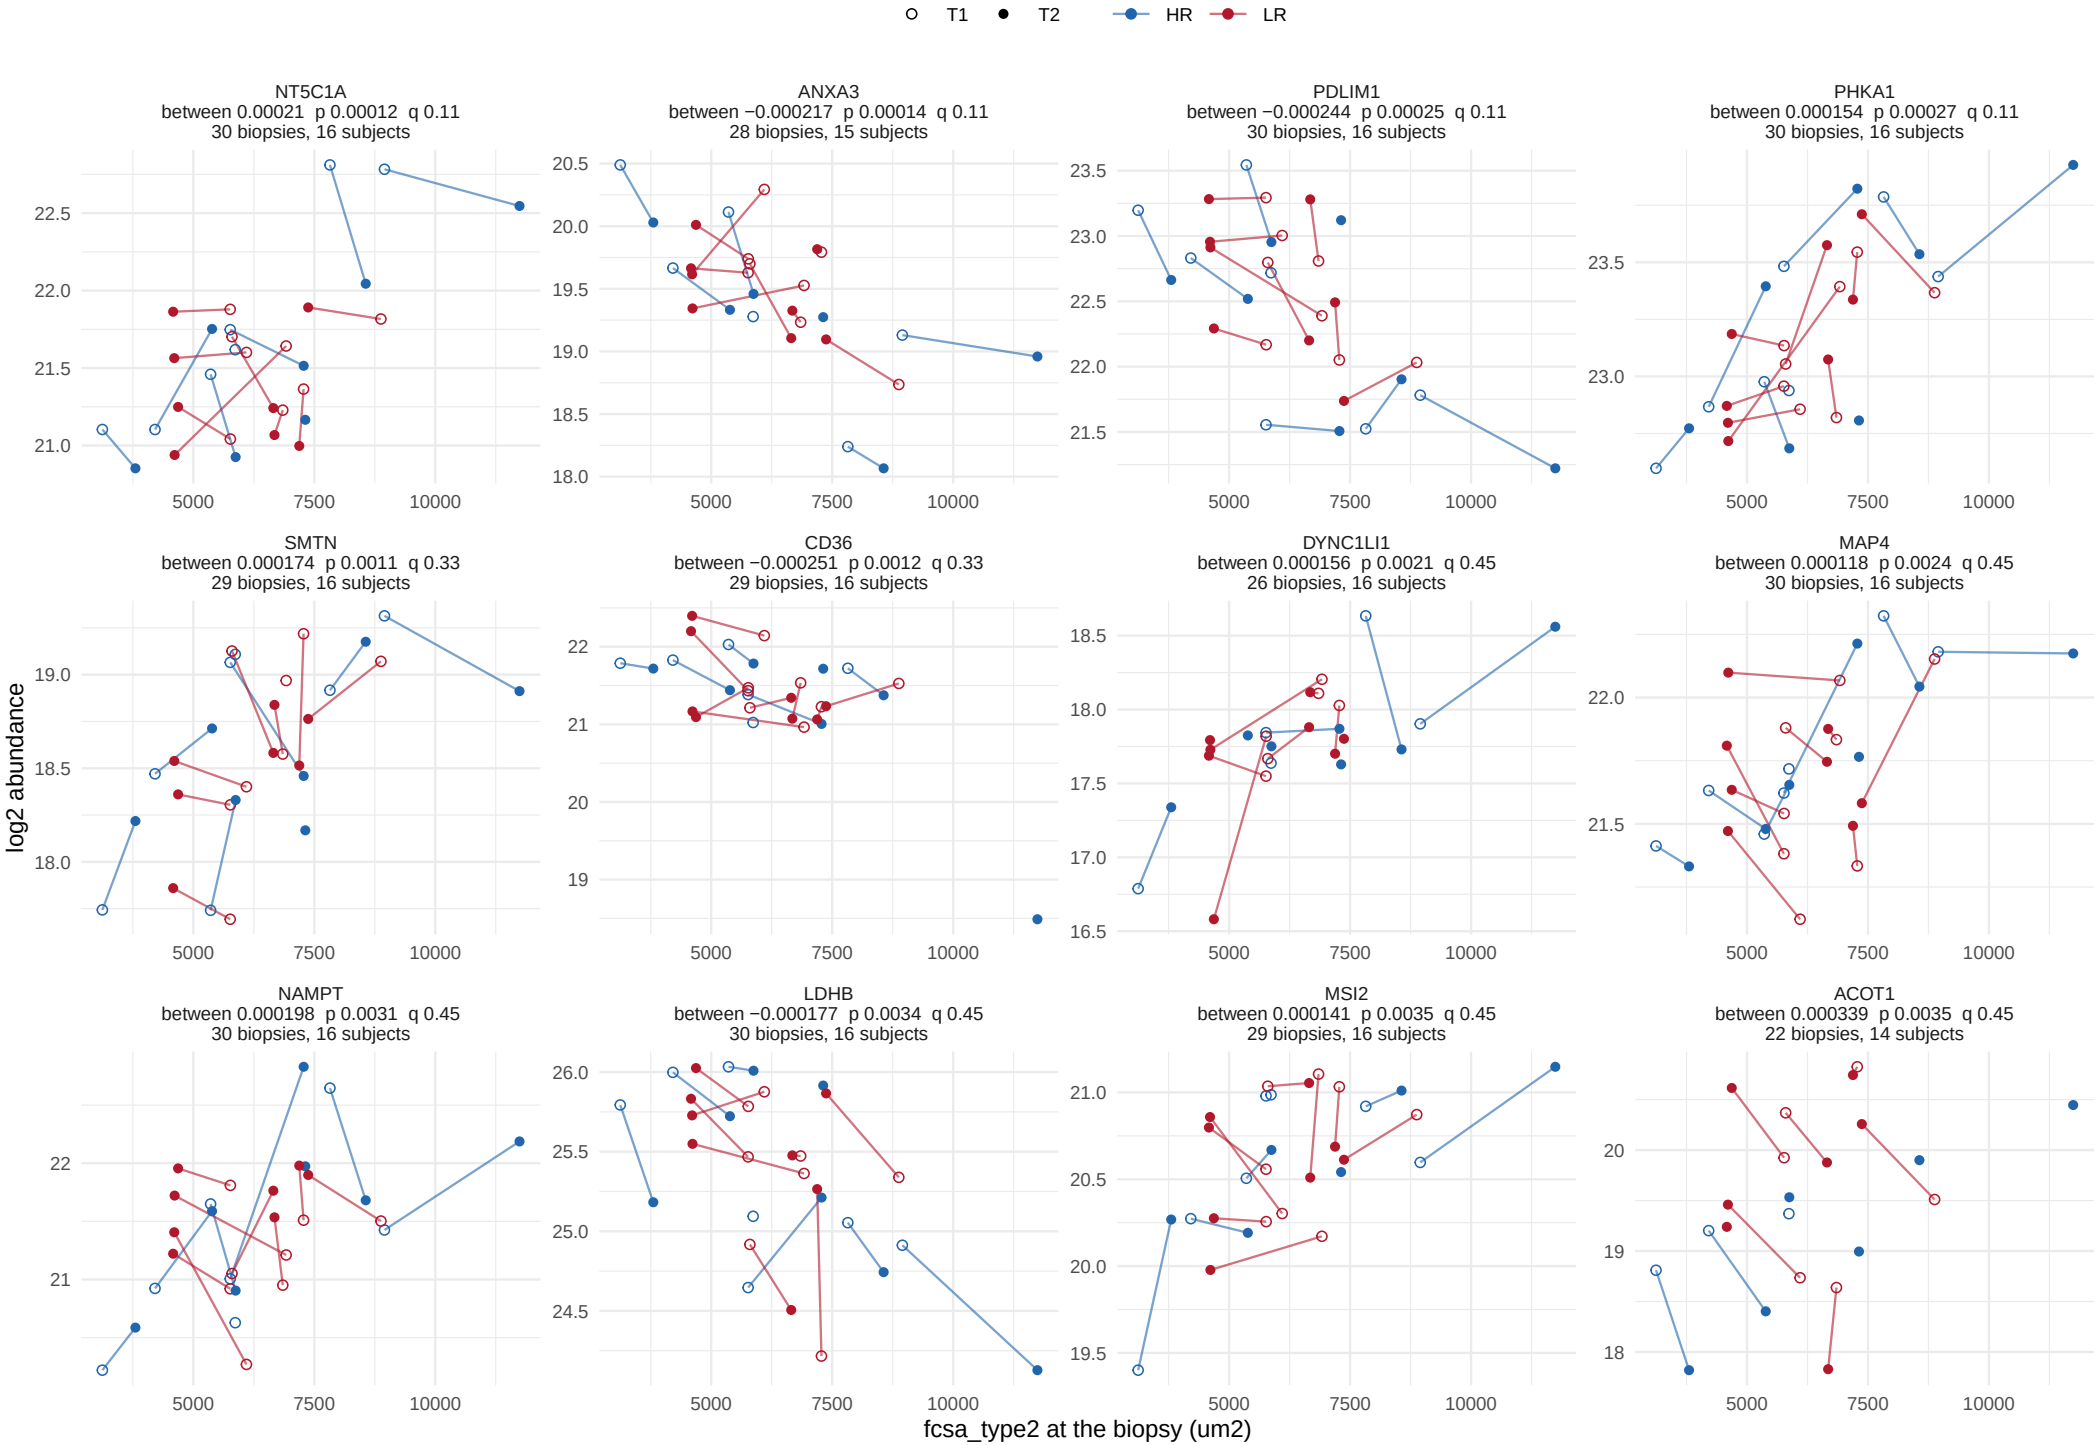

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_type2, between−person term


74 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 2 of 7.



limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_type2, between−person term


74 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 3 of 7.

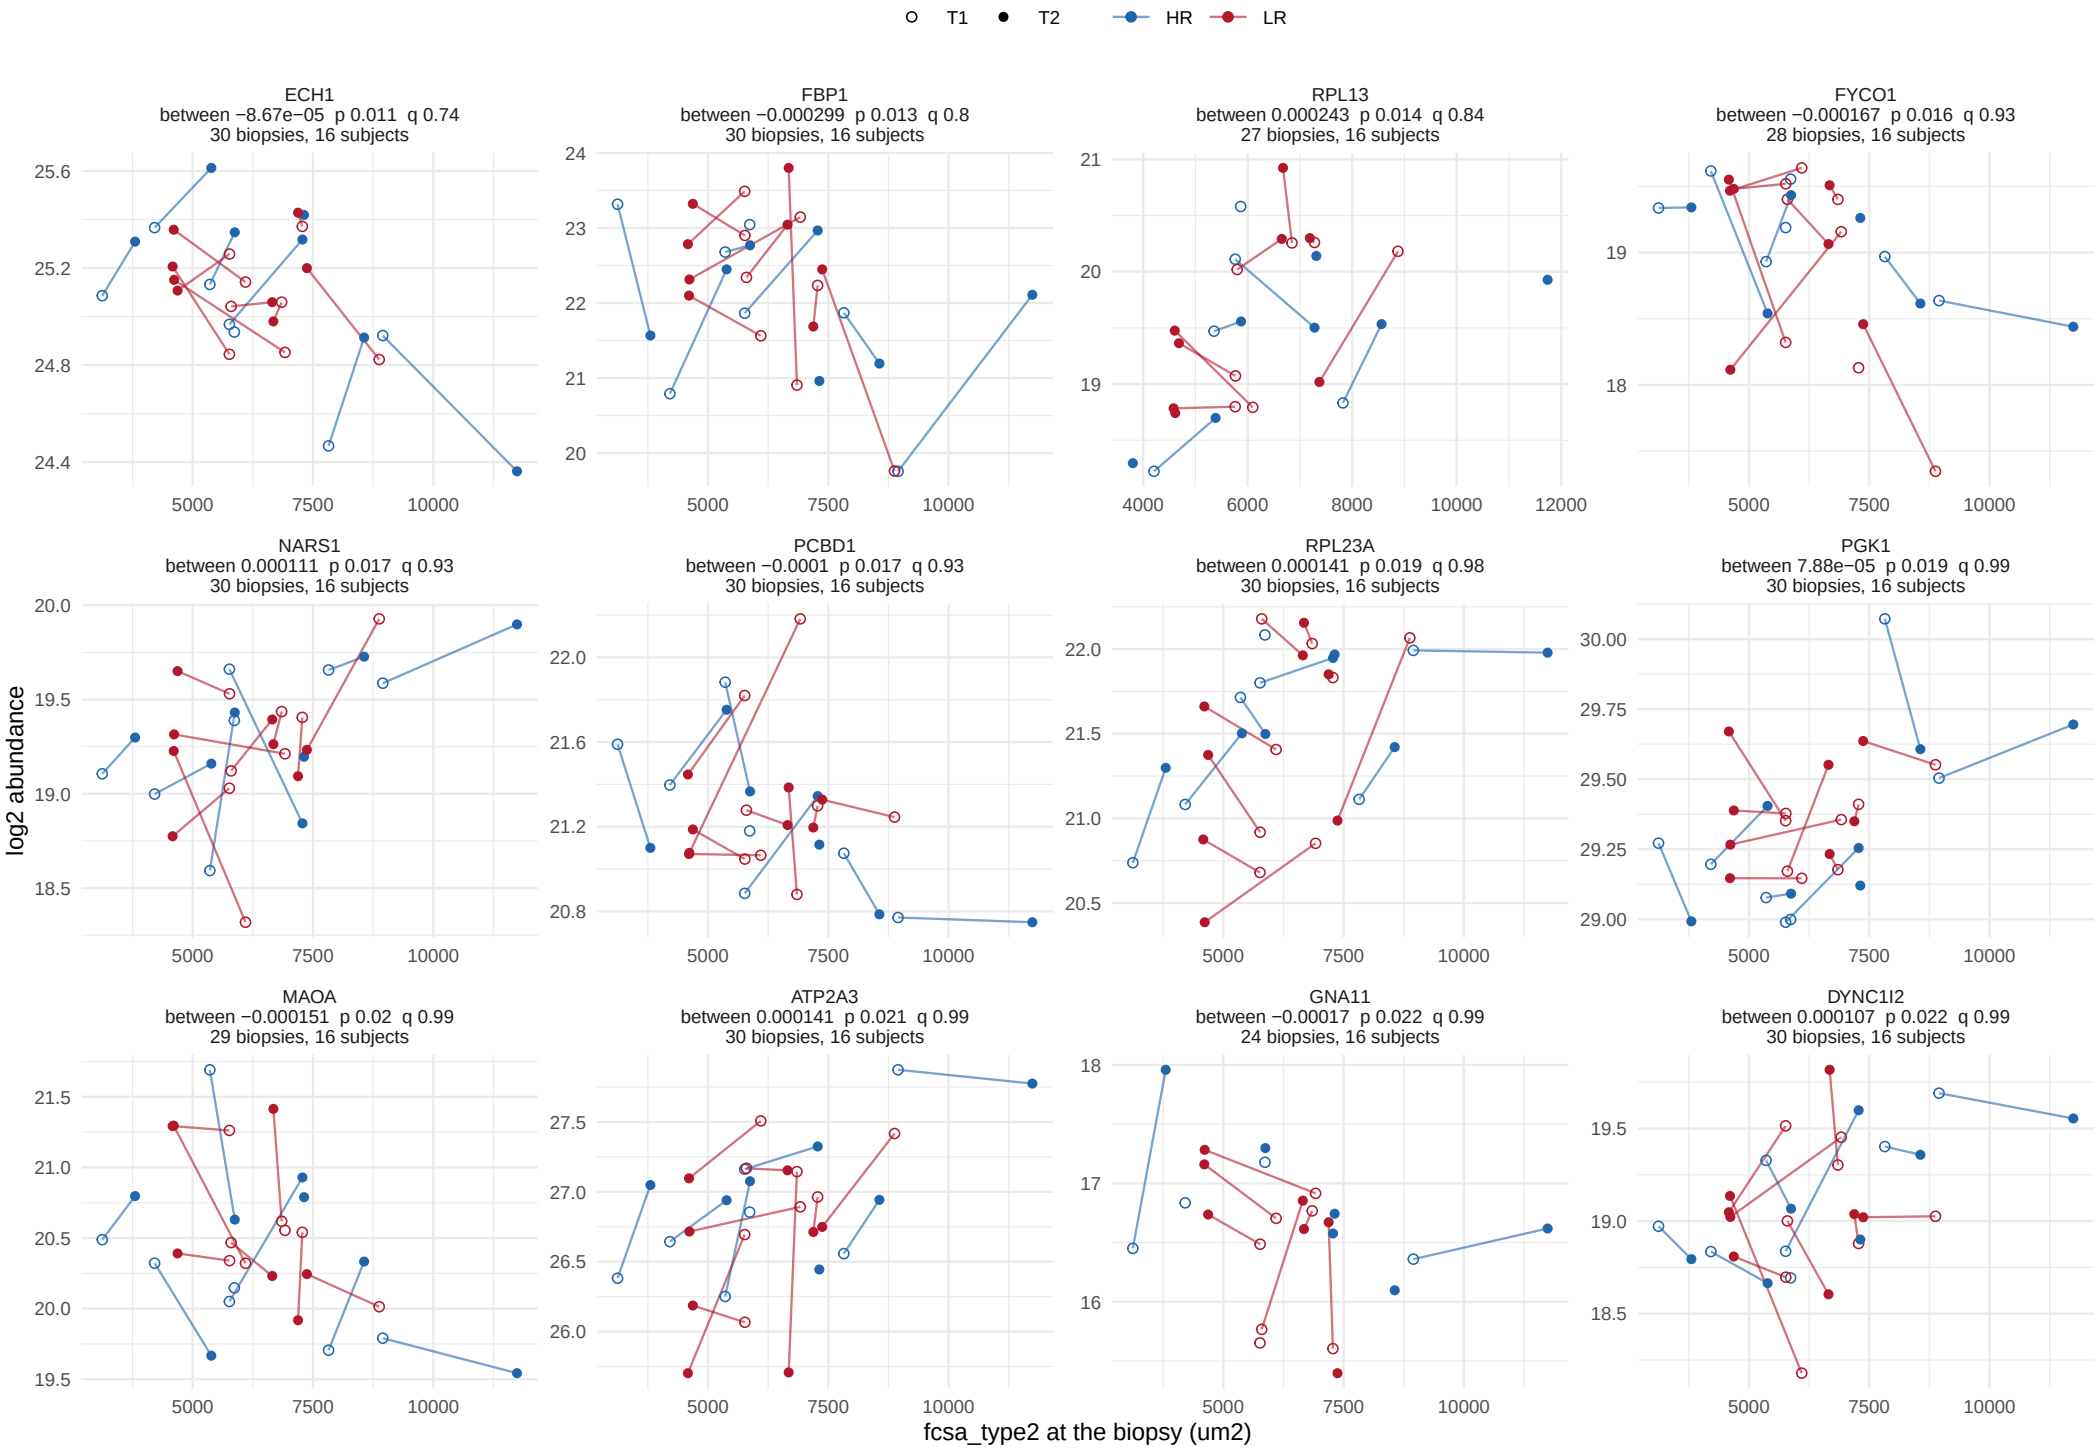

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_type2, between−person term


74 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 4 of 7.

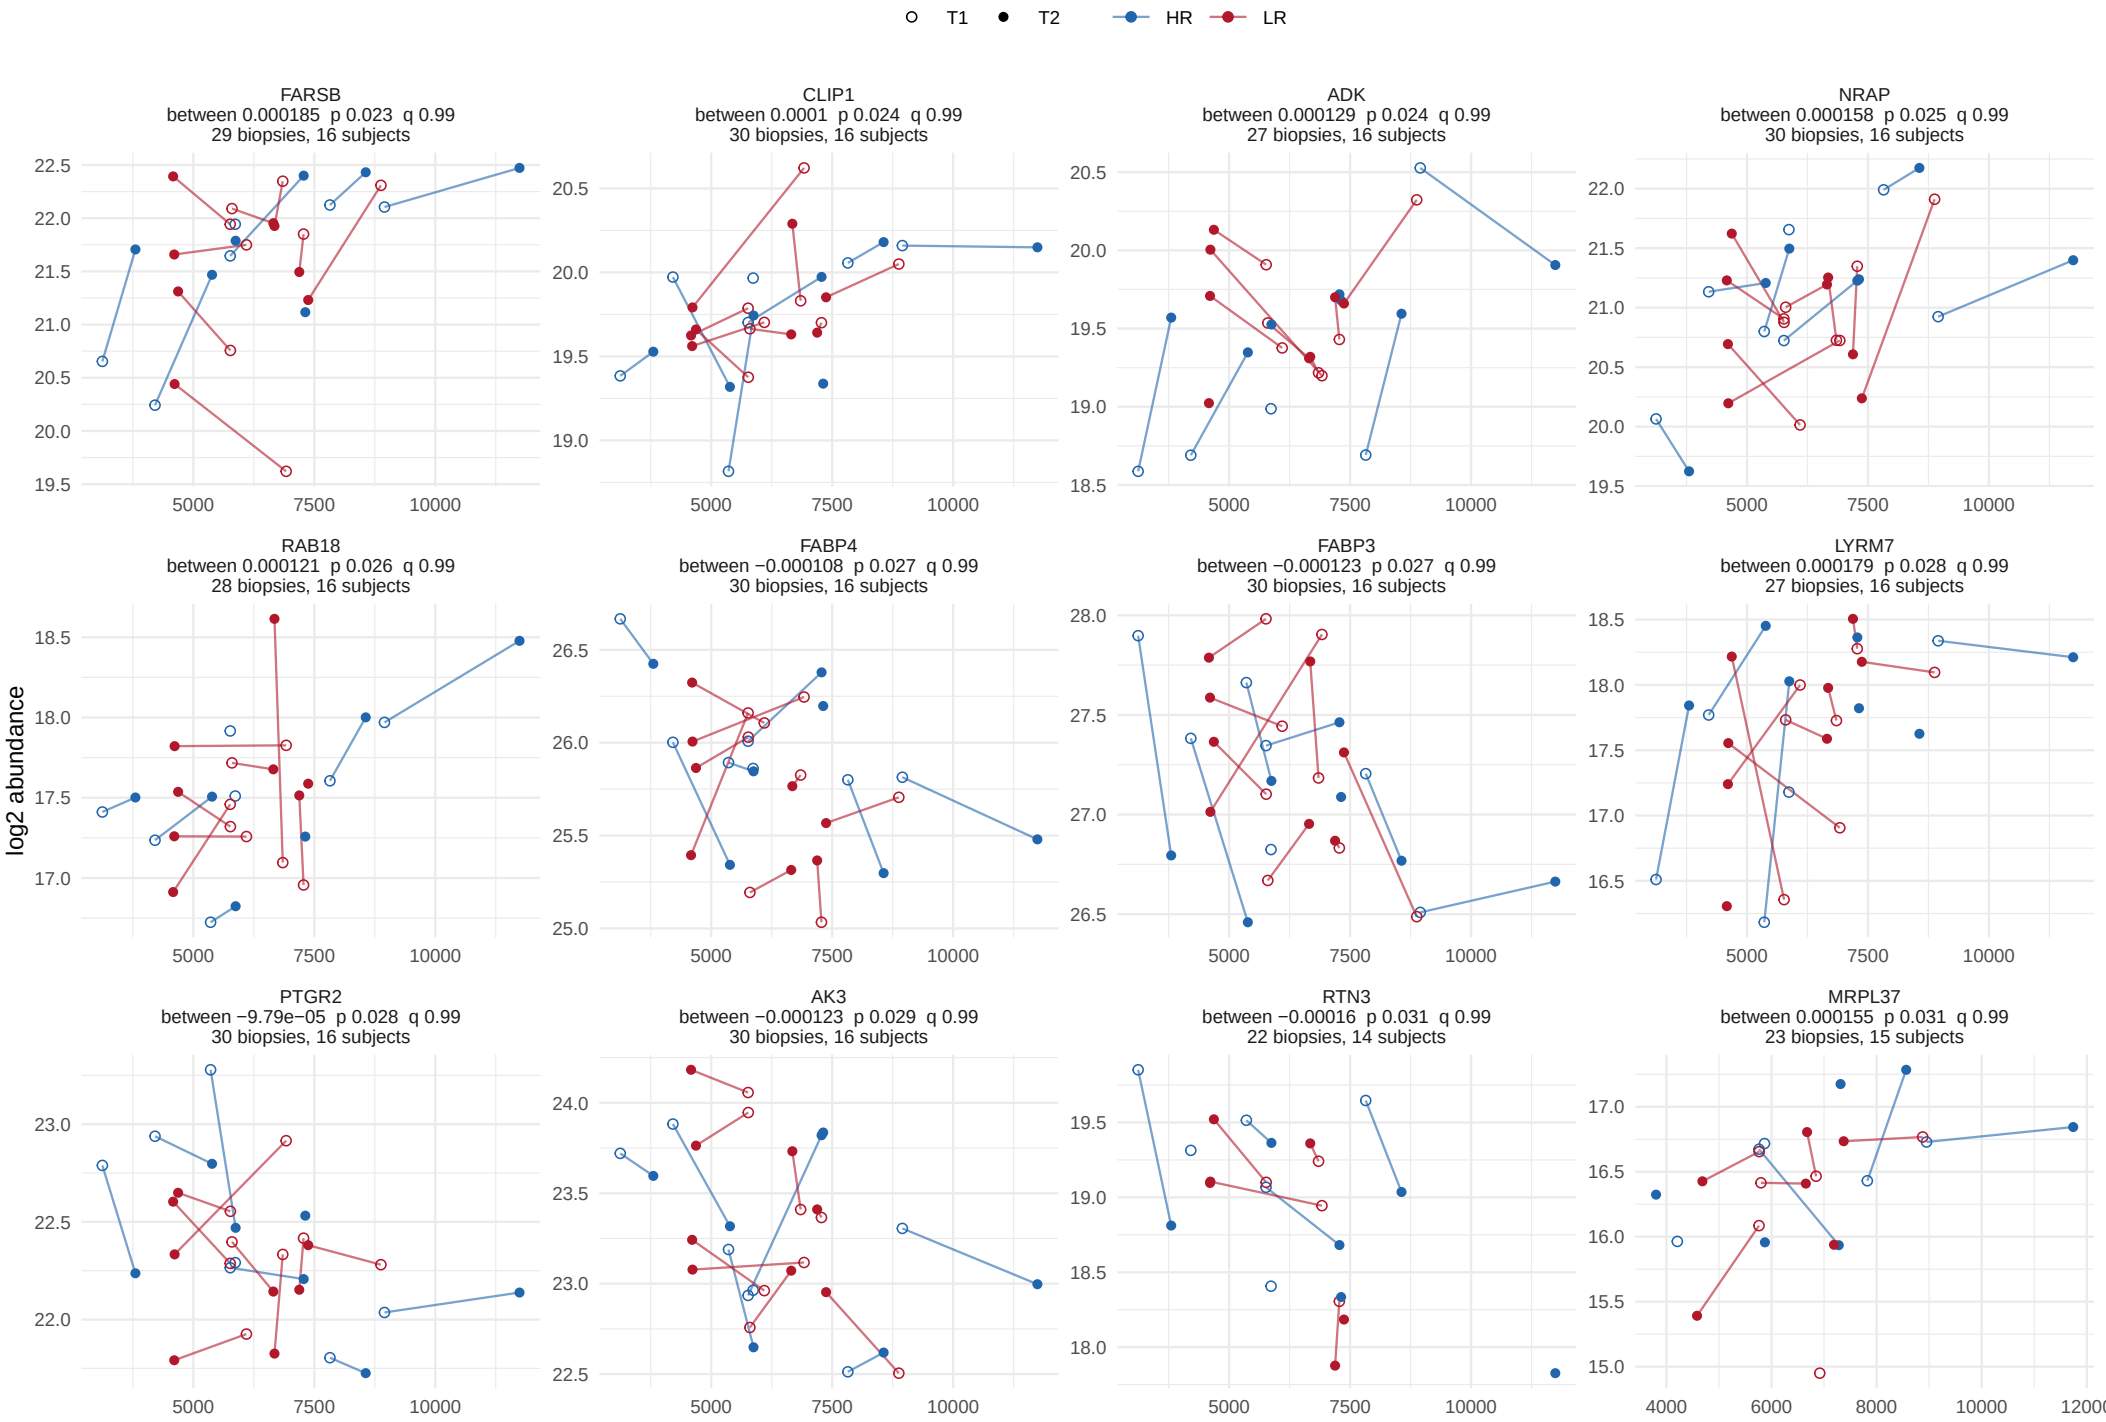

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_type2, between−person term


74 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 5 of 7.

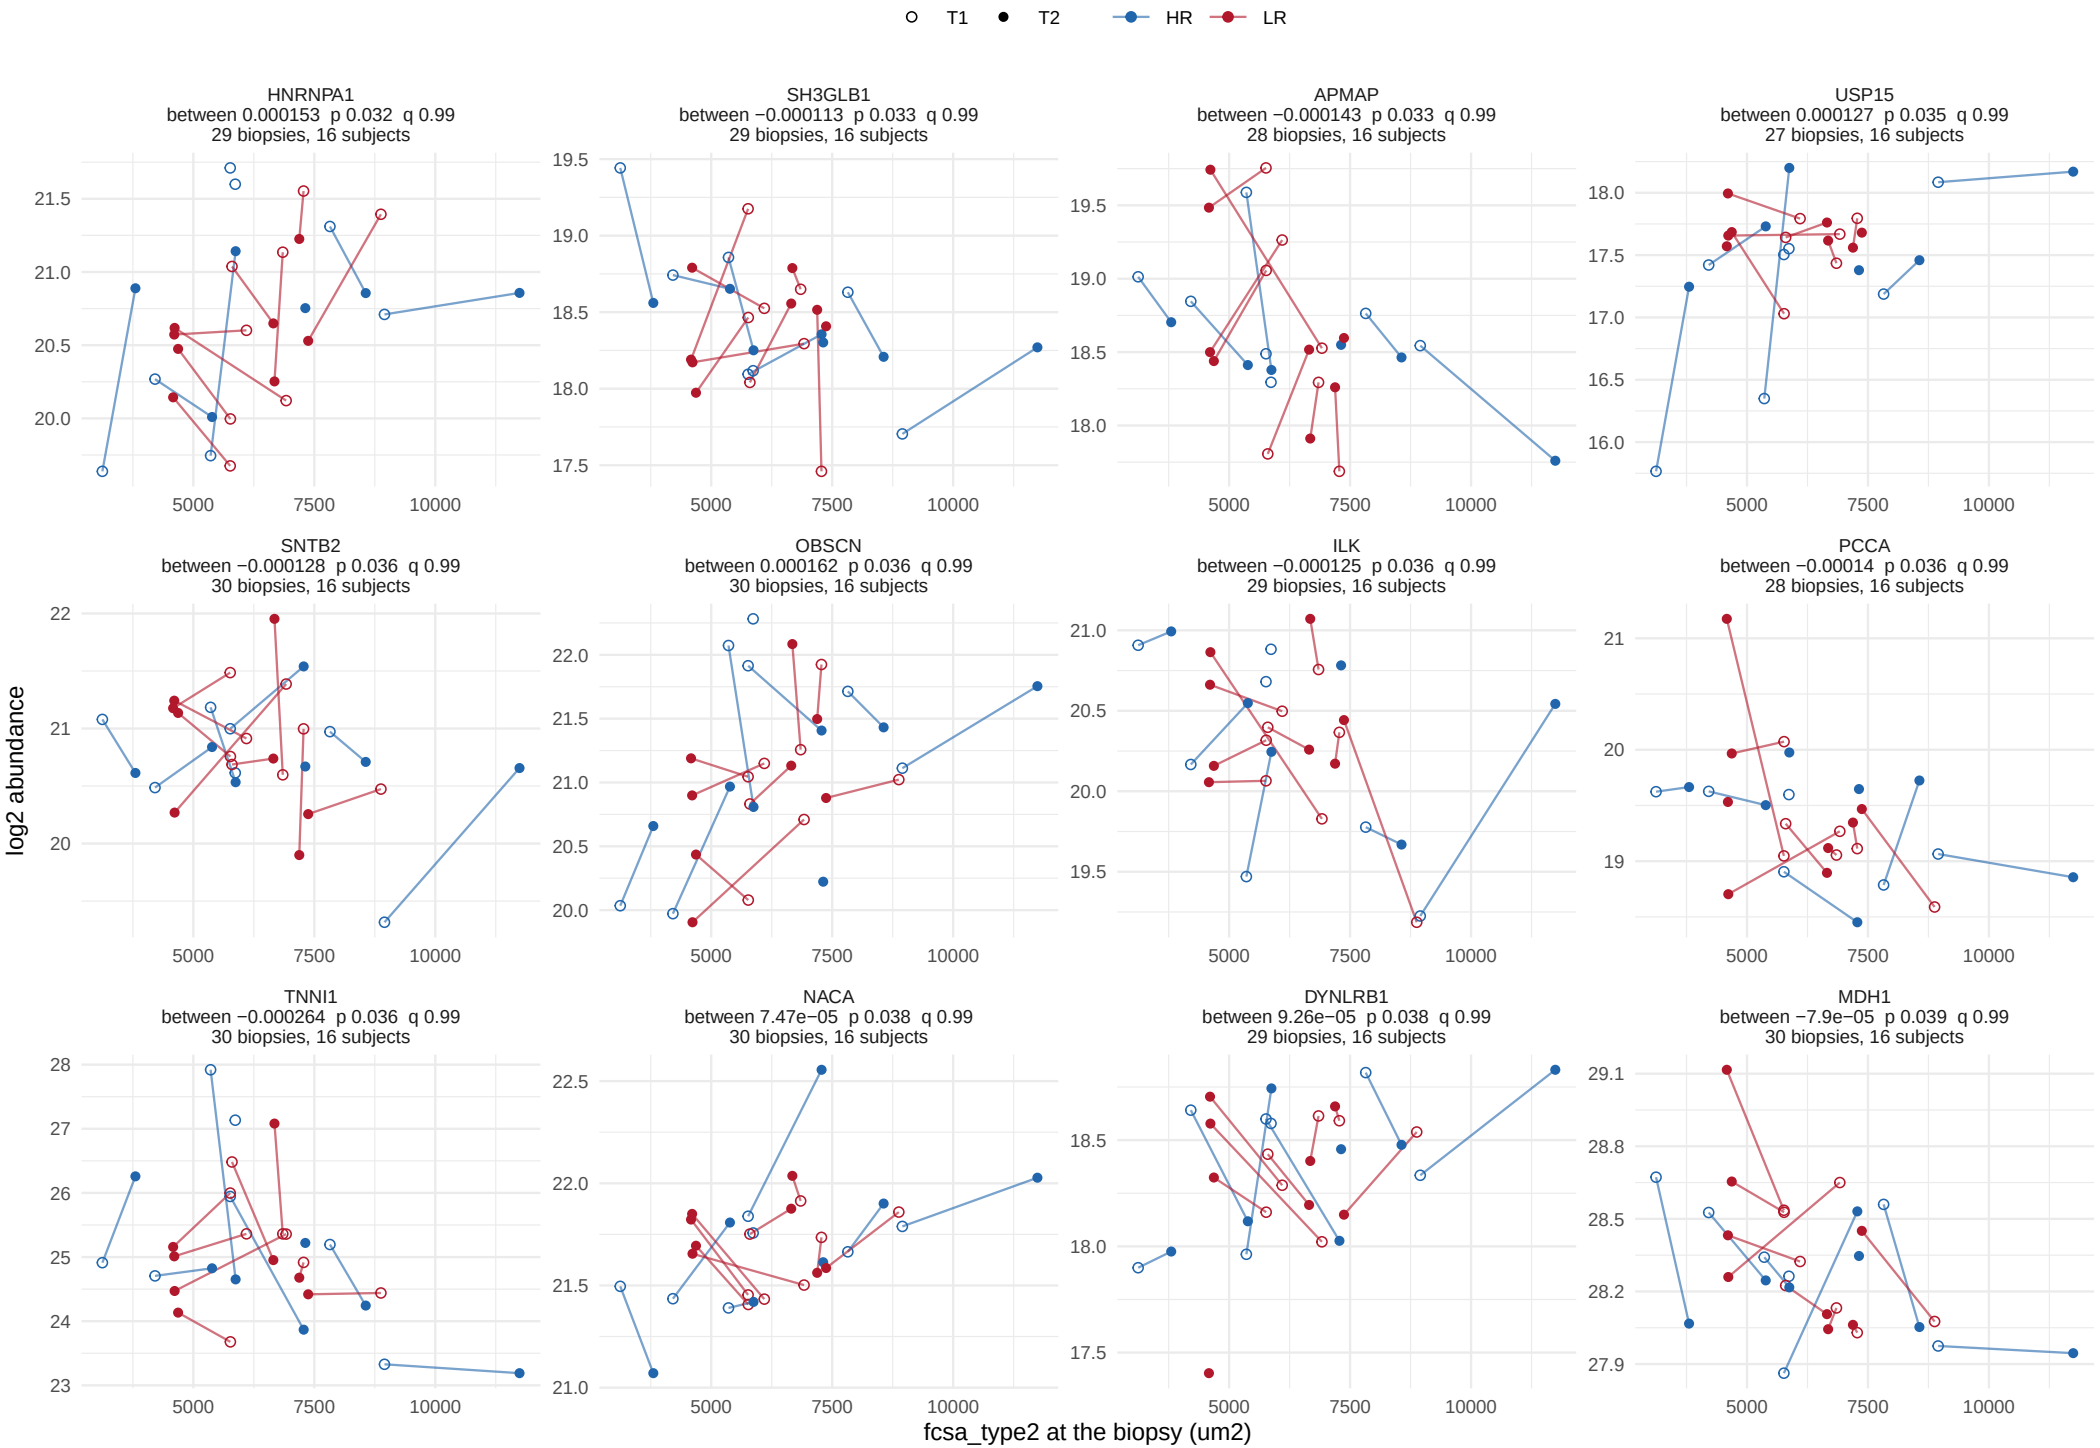

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_type2, between−person term


74 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 6 of 7.

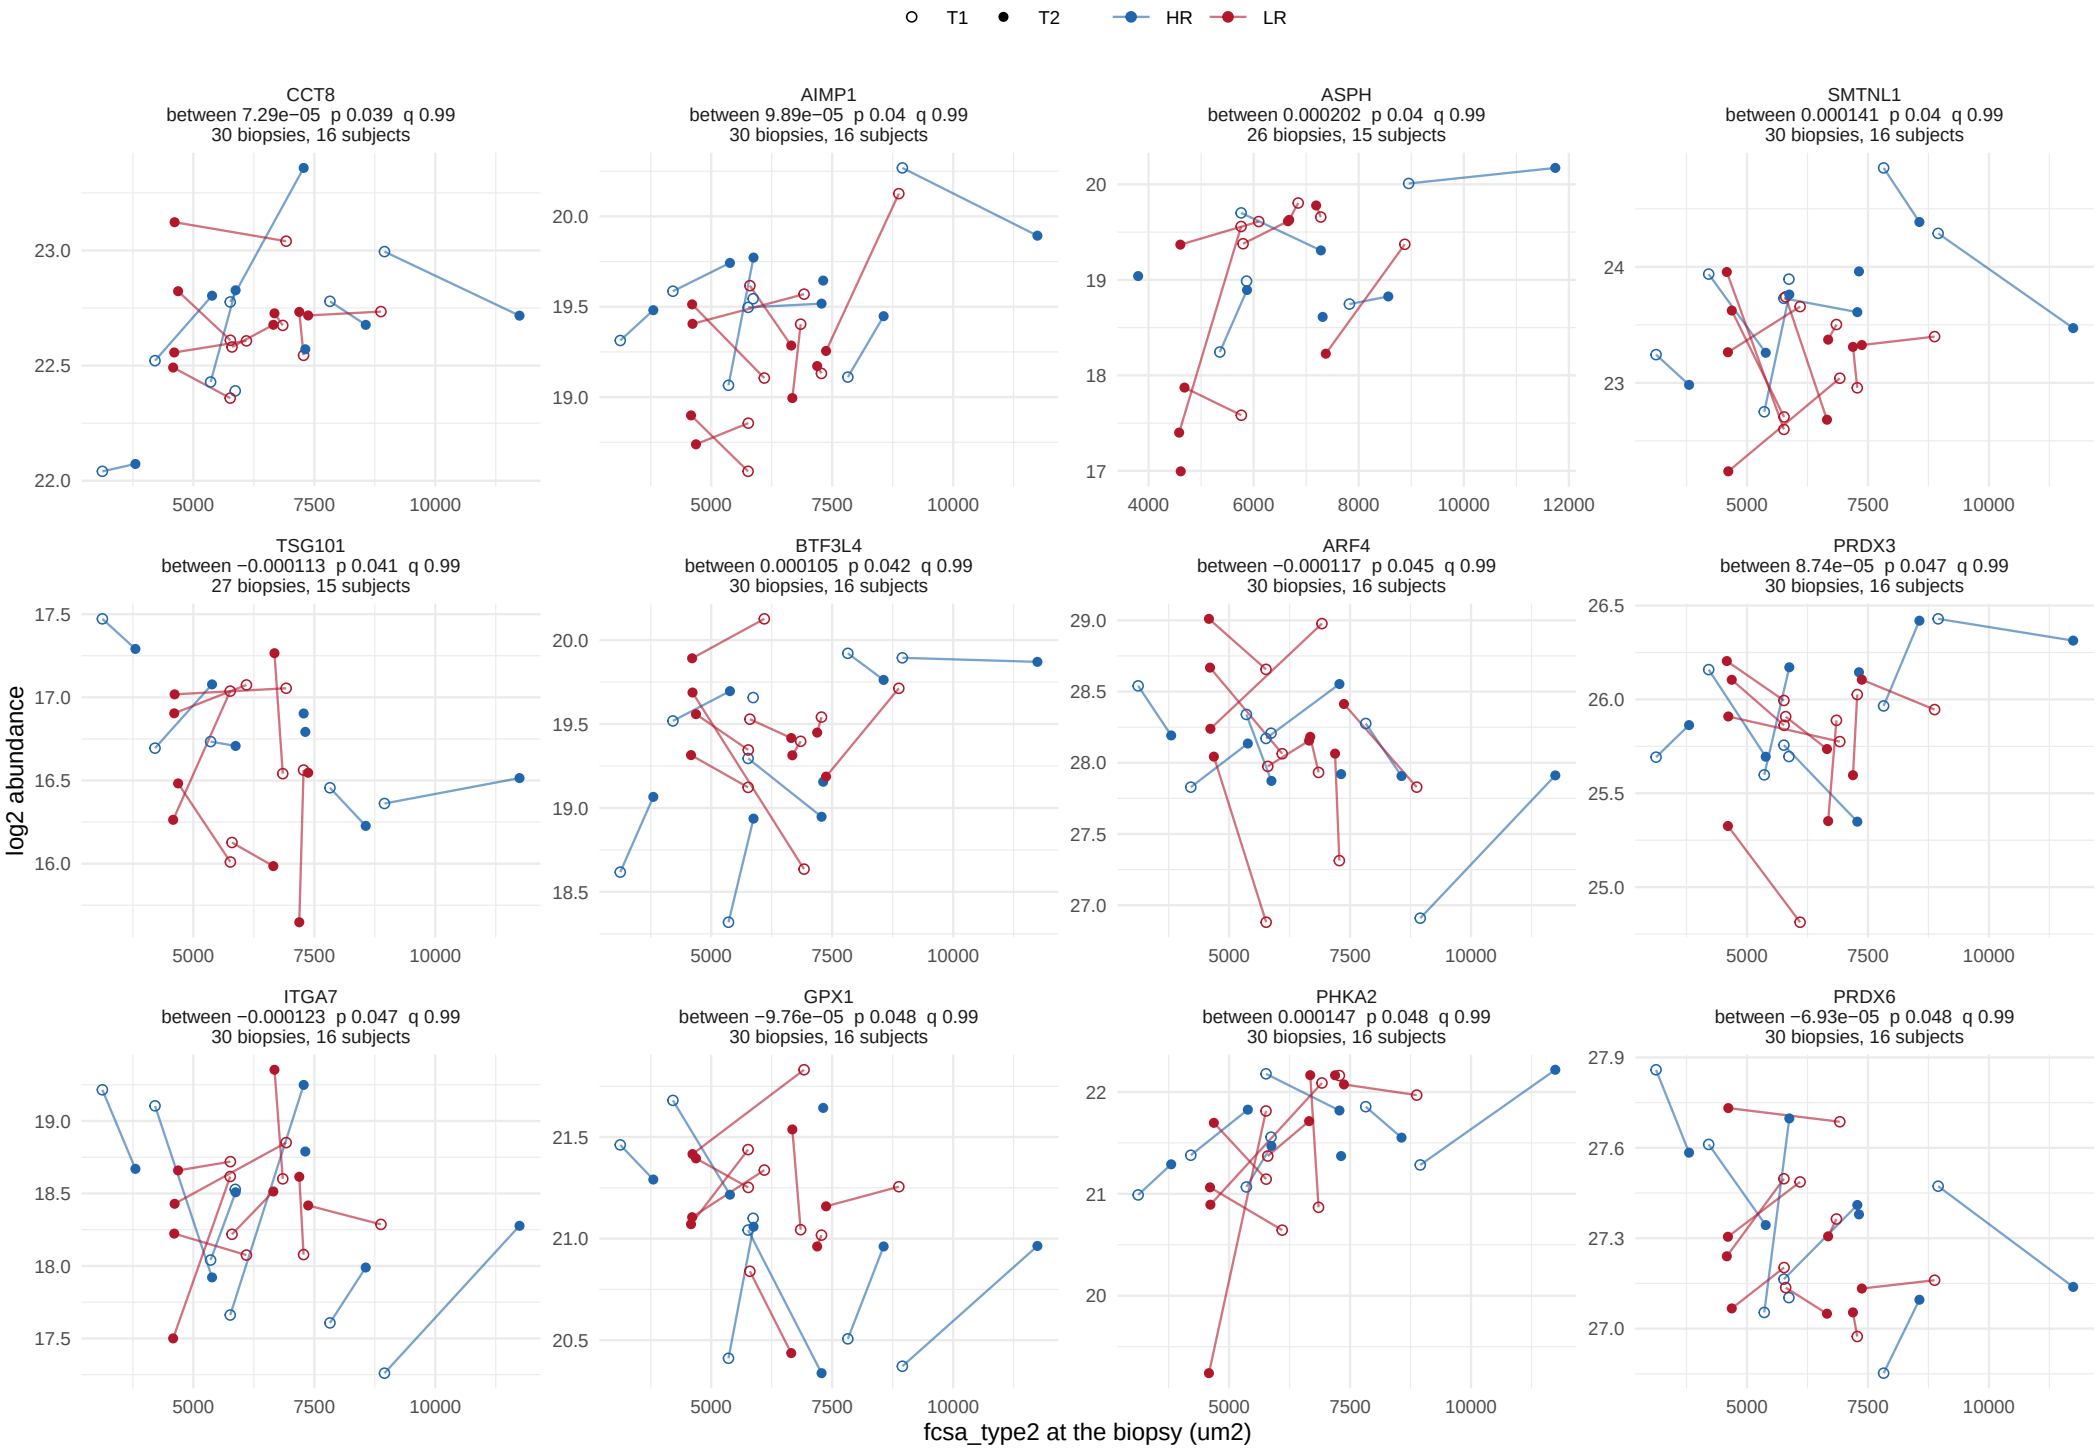

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_type2, between−person term


74 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 7 of 7.

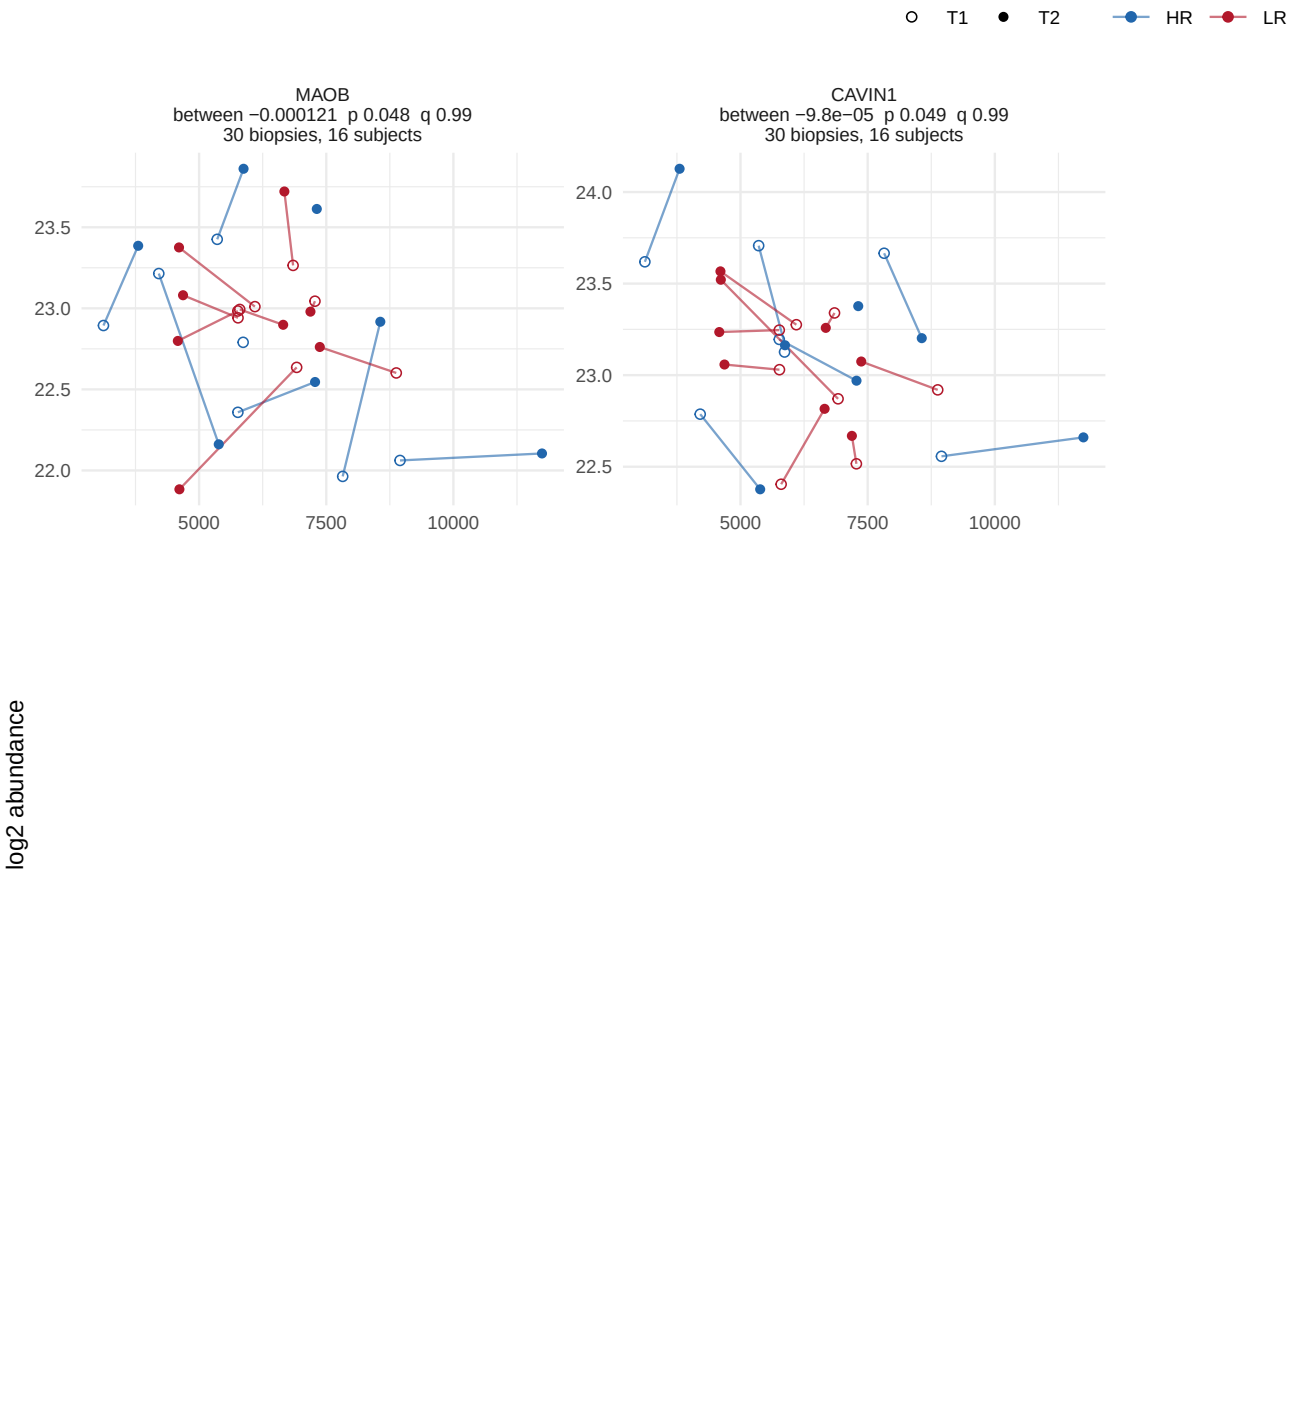

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

mcsa, within−person term


59 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 1 of 5.

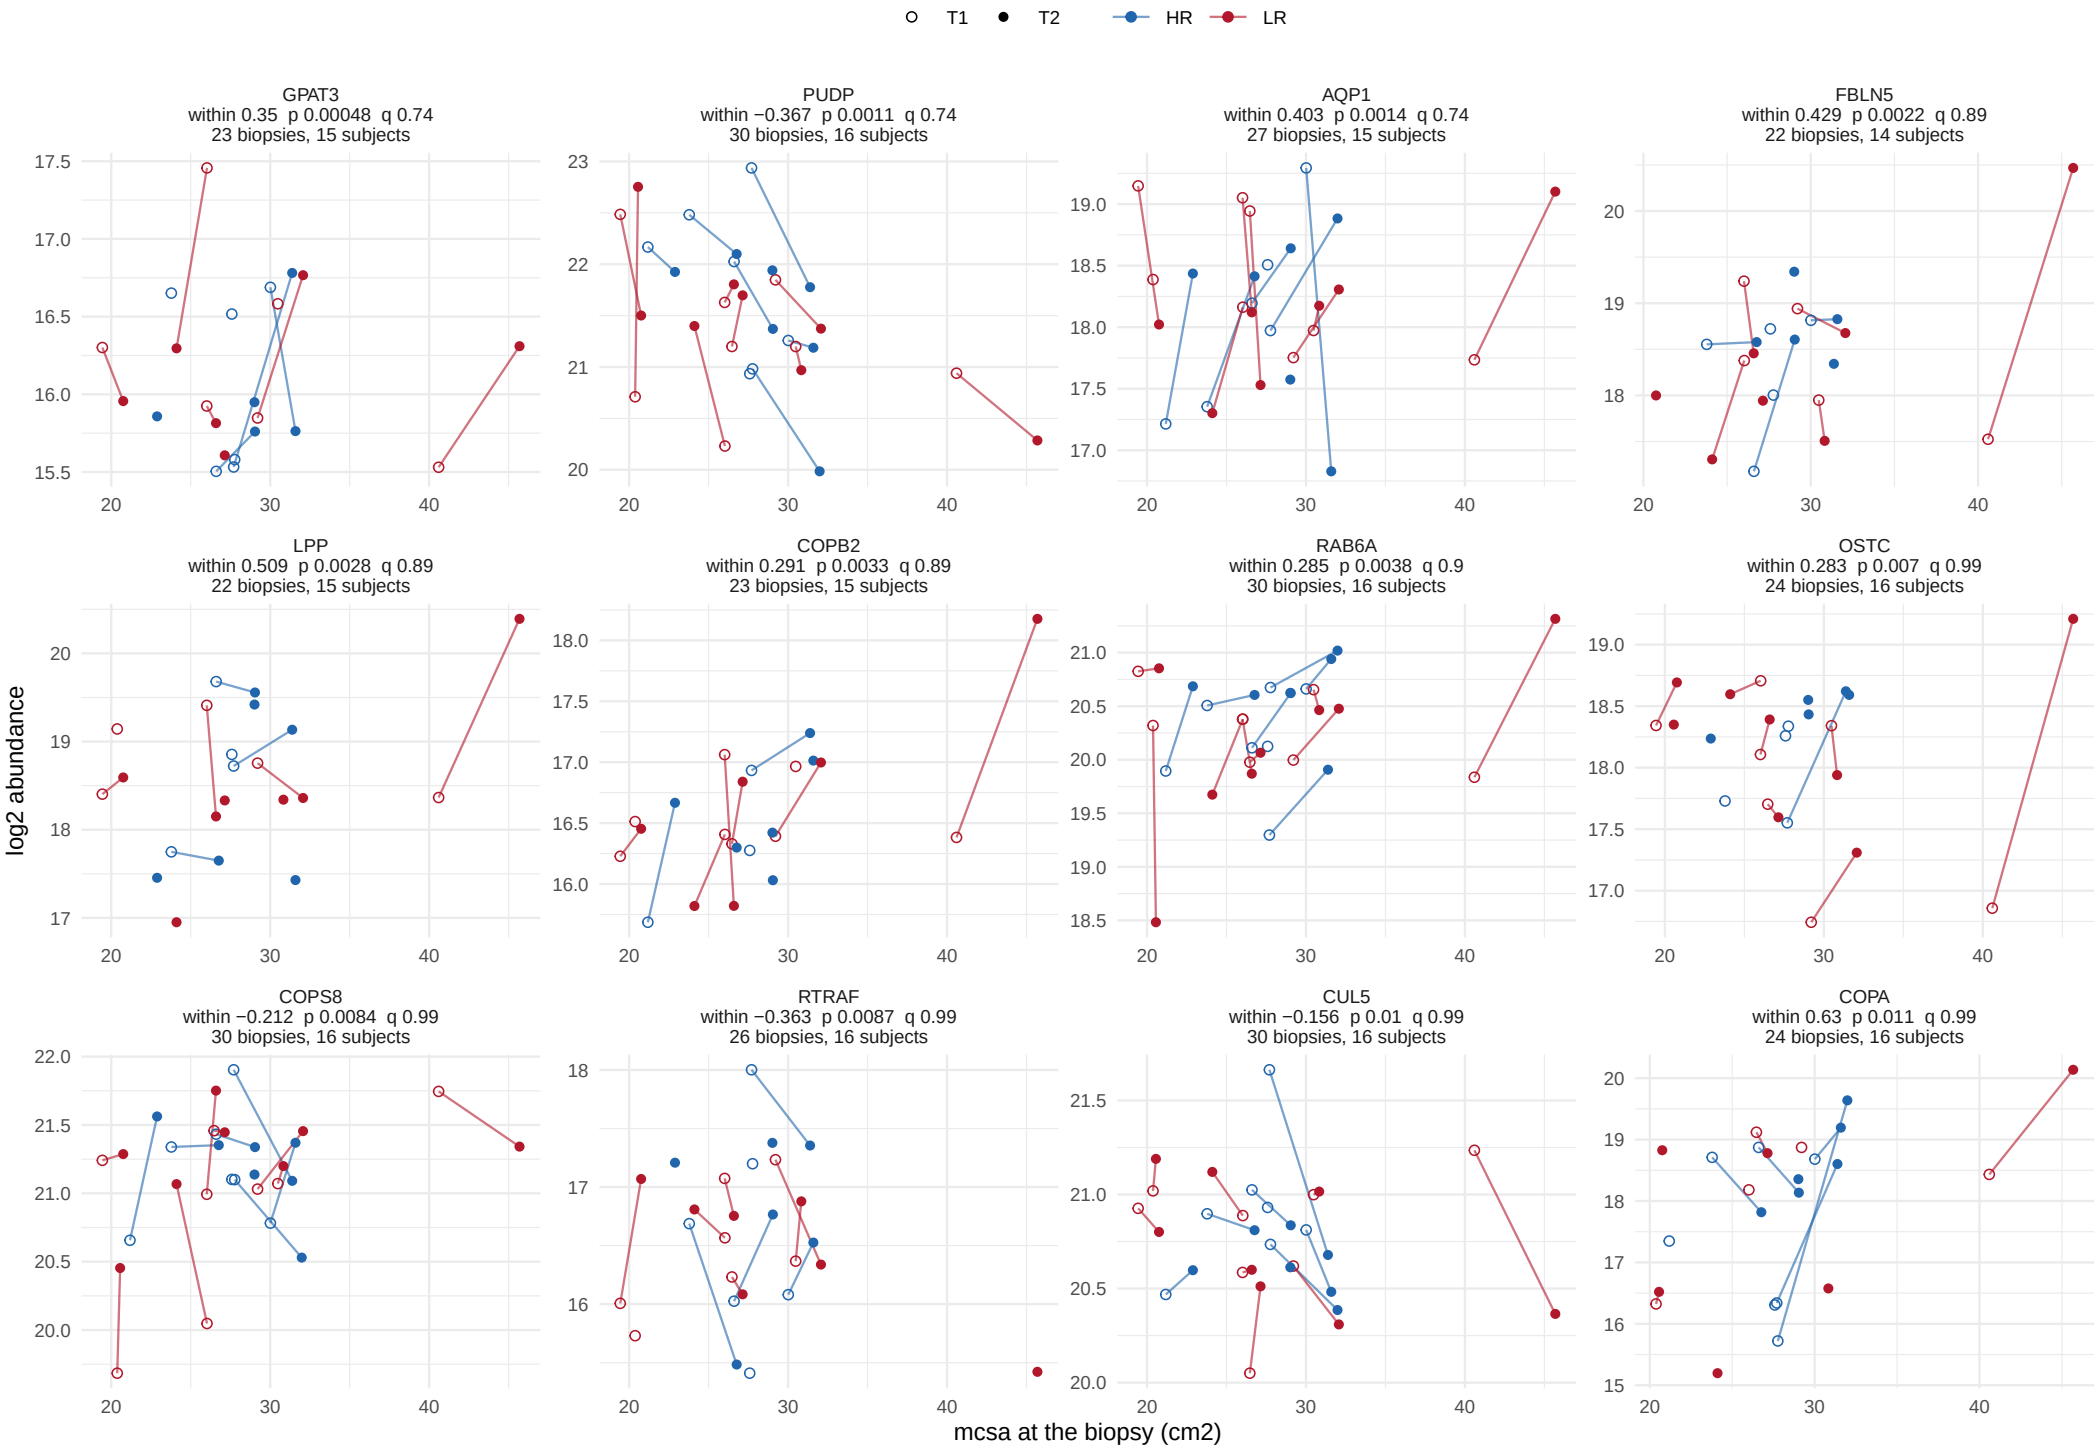

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

mcsa, within−person term


59 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 2 of 5.

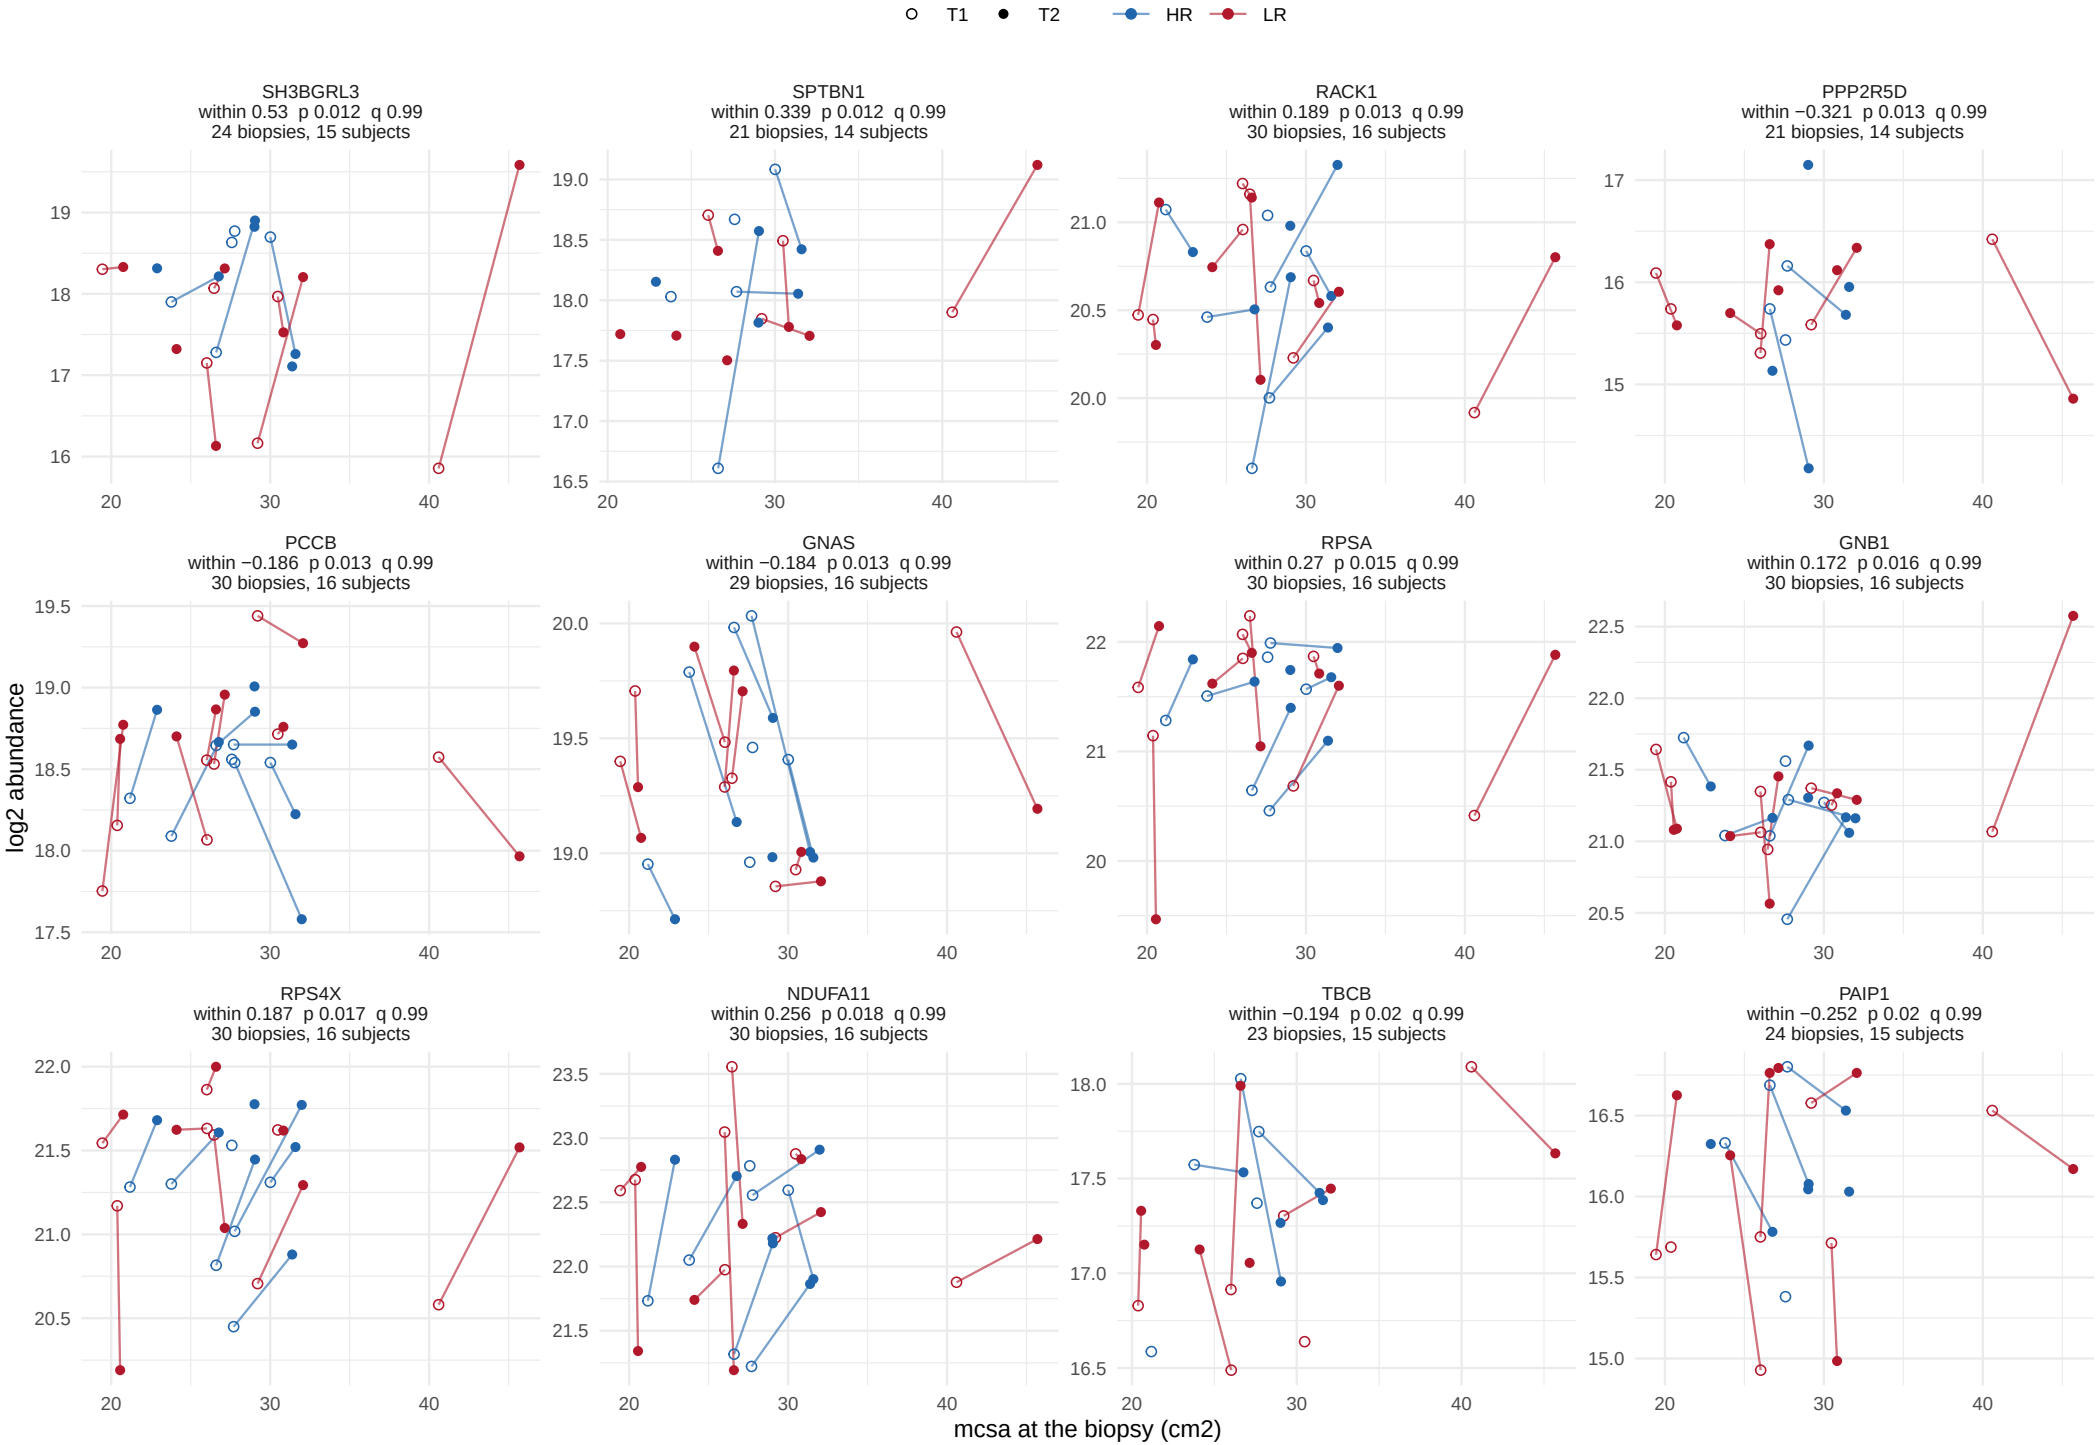

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

mcsa, within−person term


59 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 3 of 5.

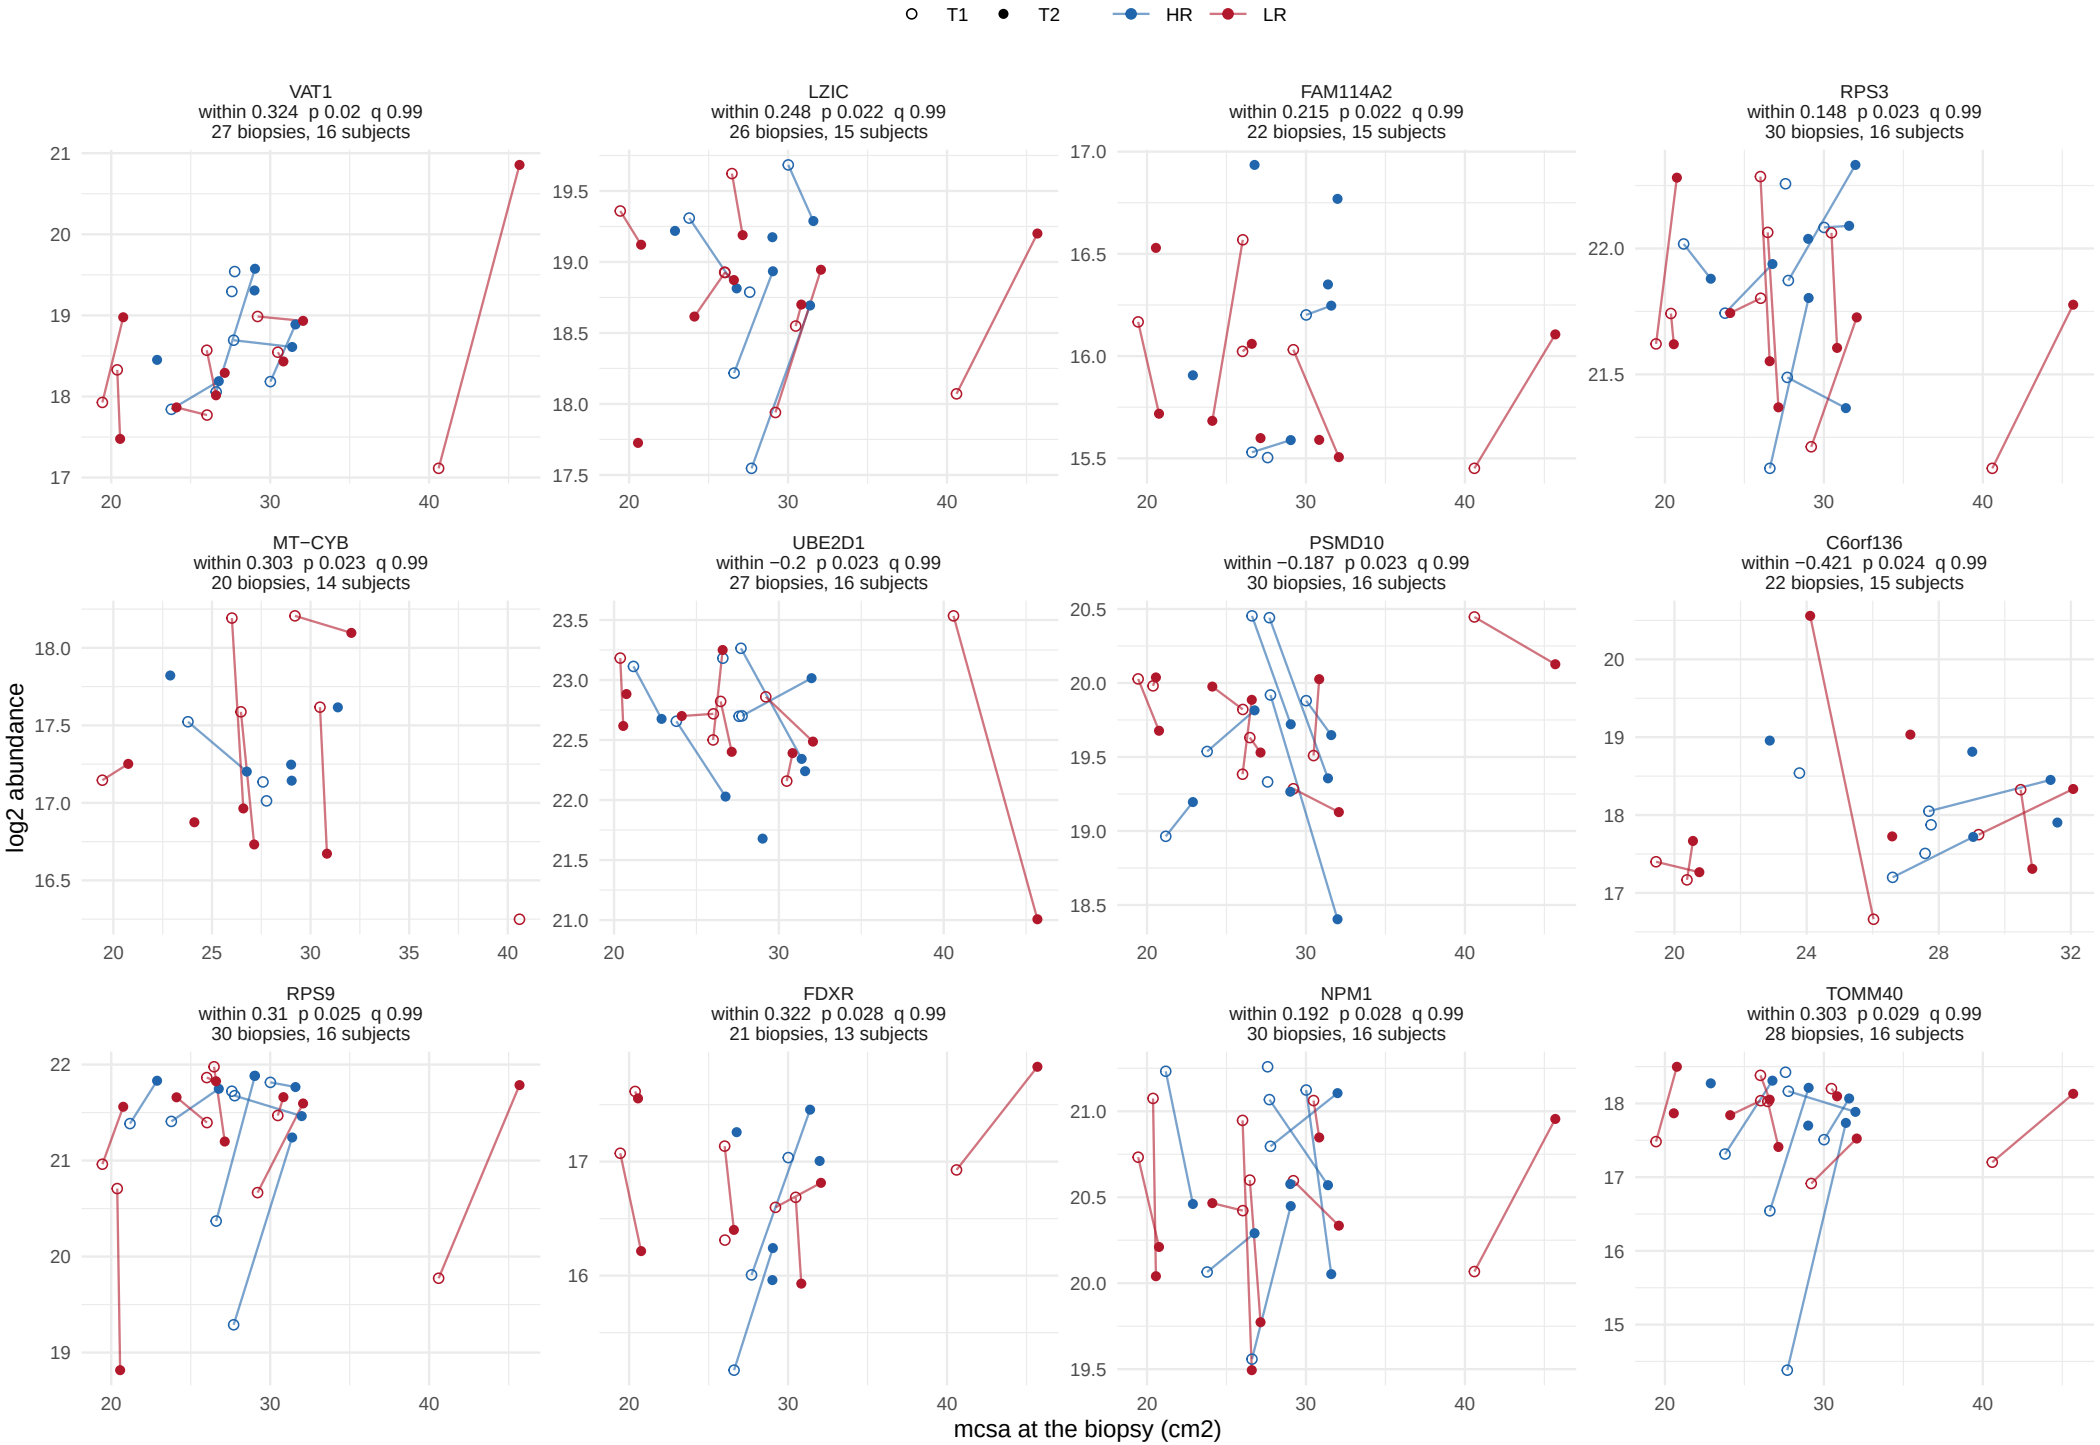

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

mcsa, within−person term


59 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 4 of 5.

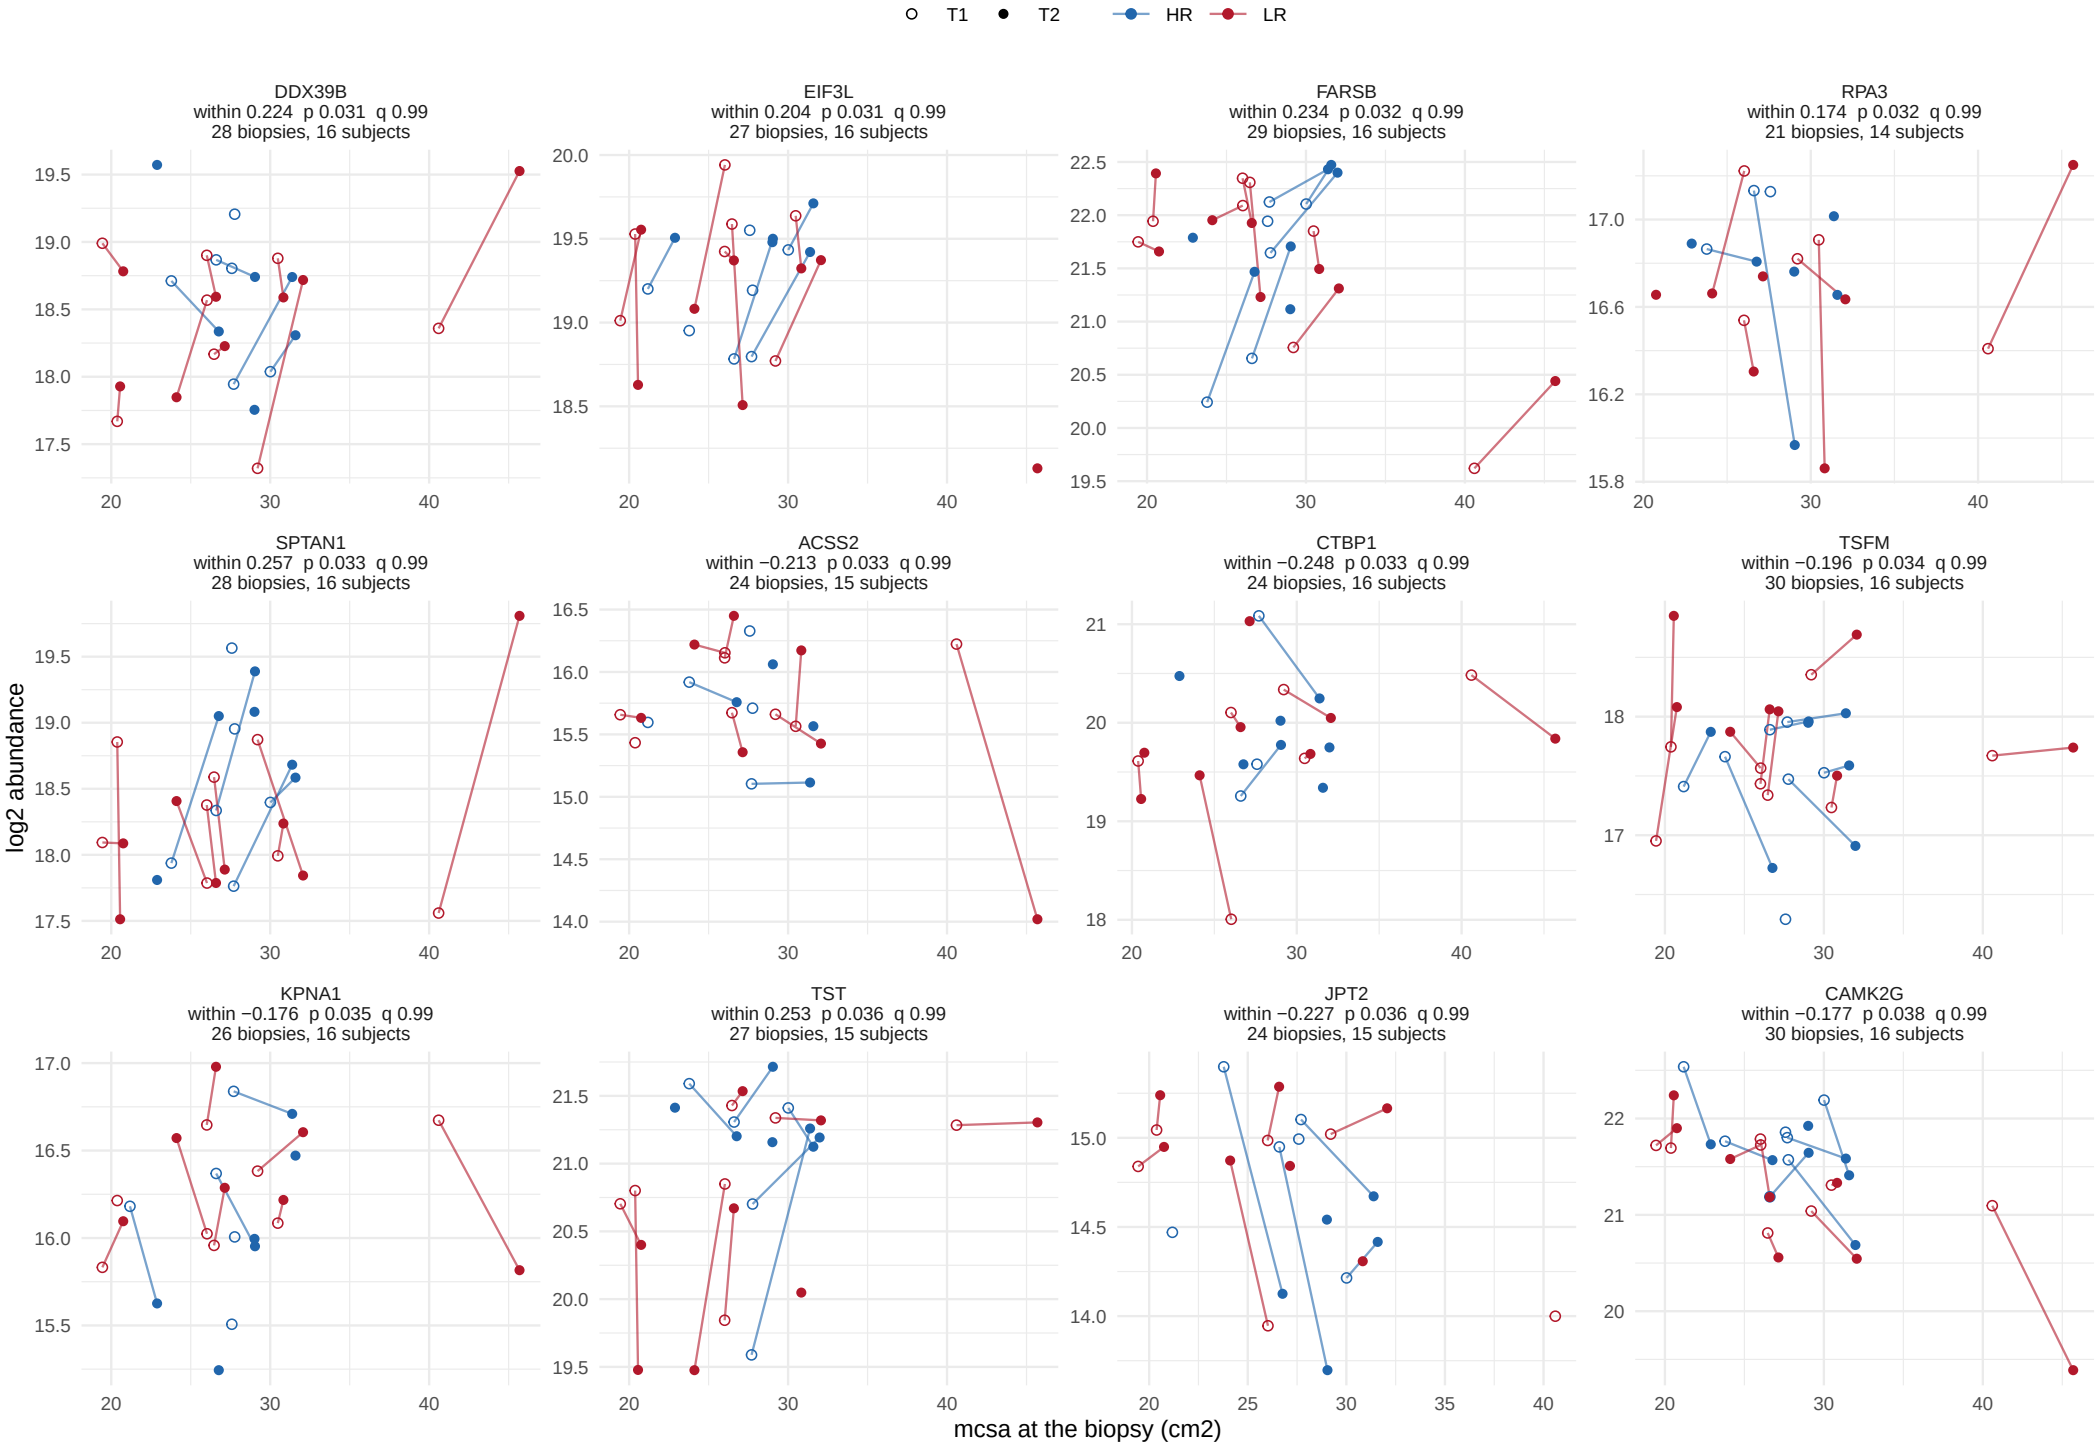

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

mcsa, within−person term


59 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 5 of 5.

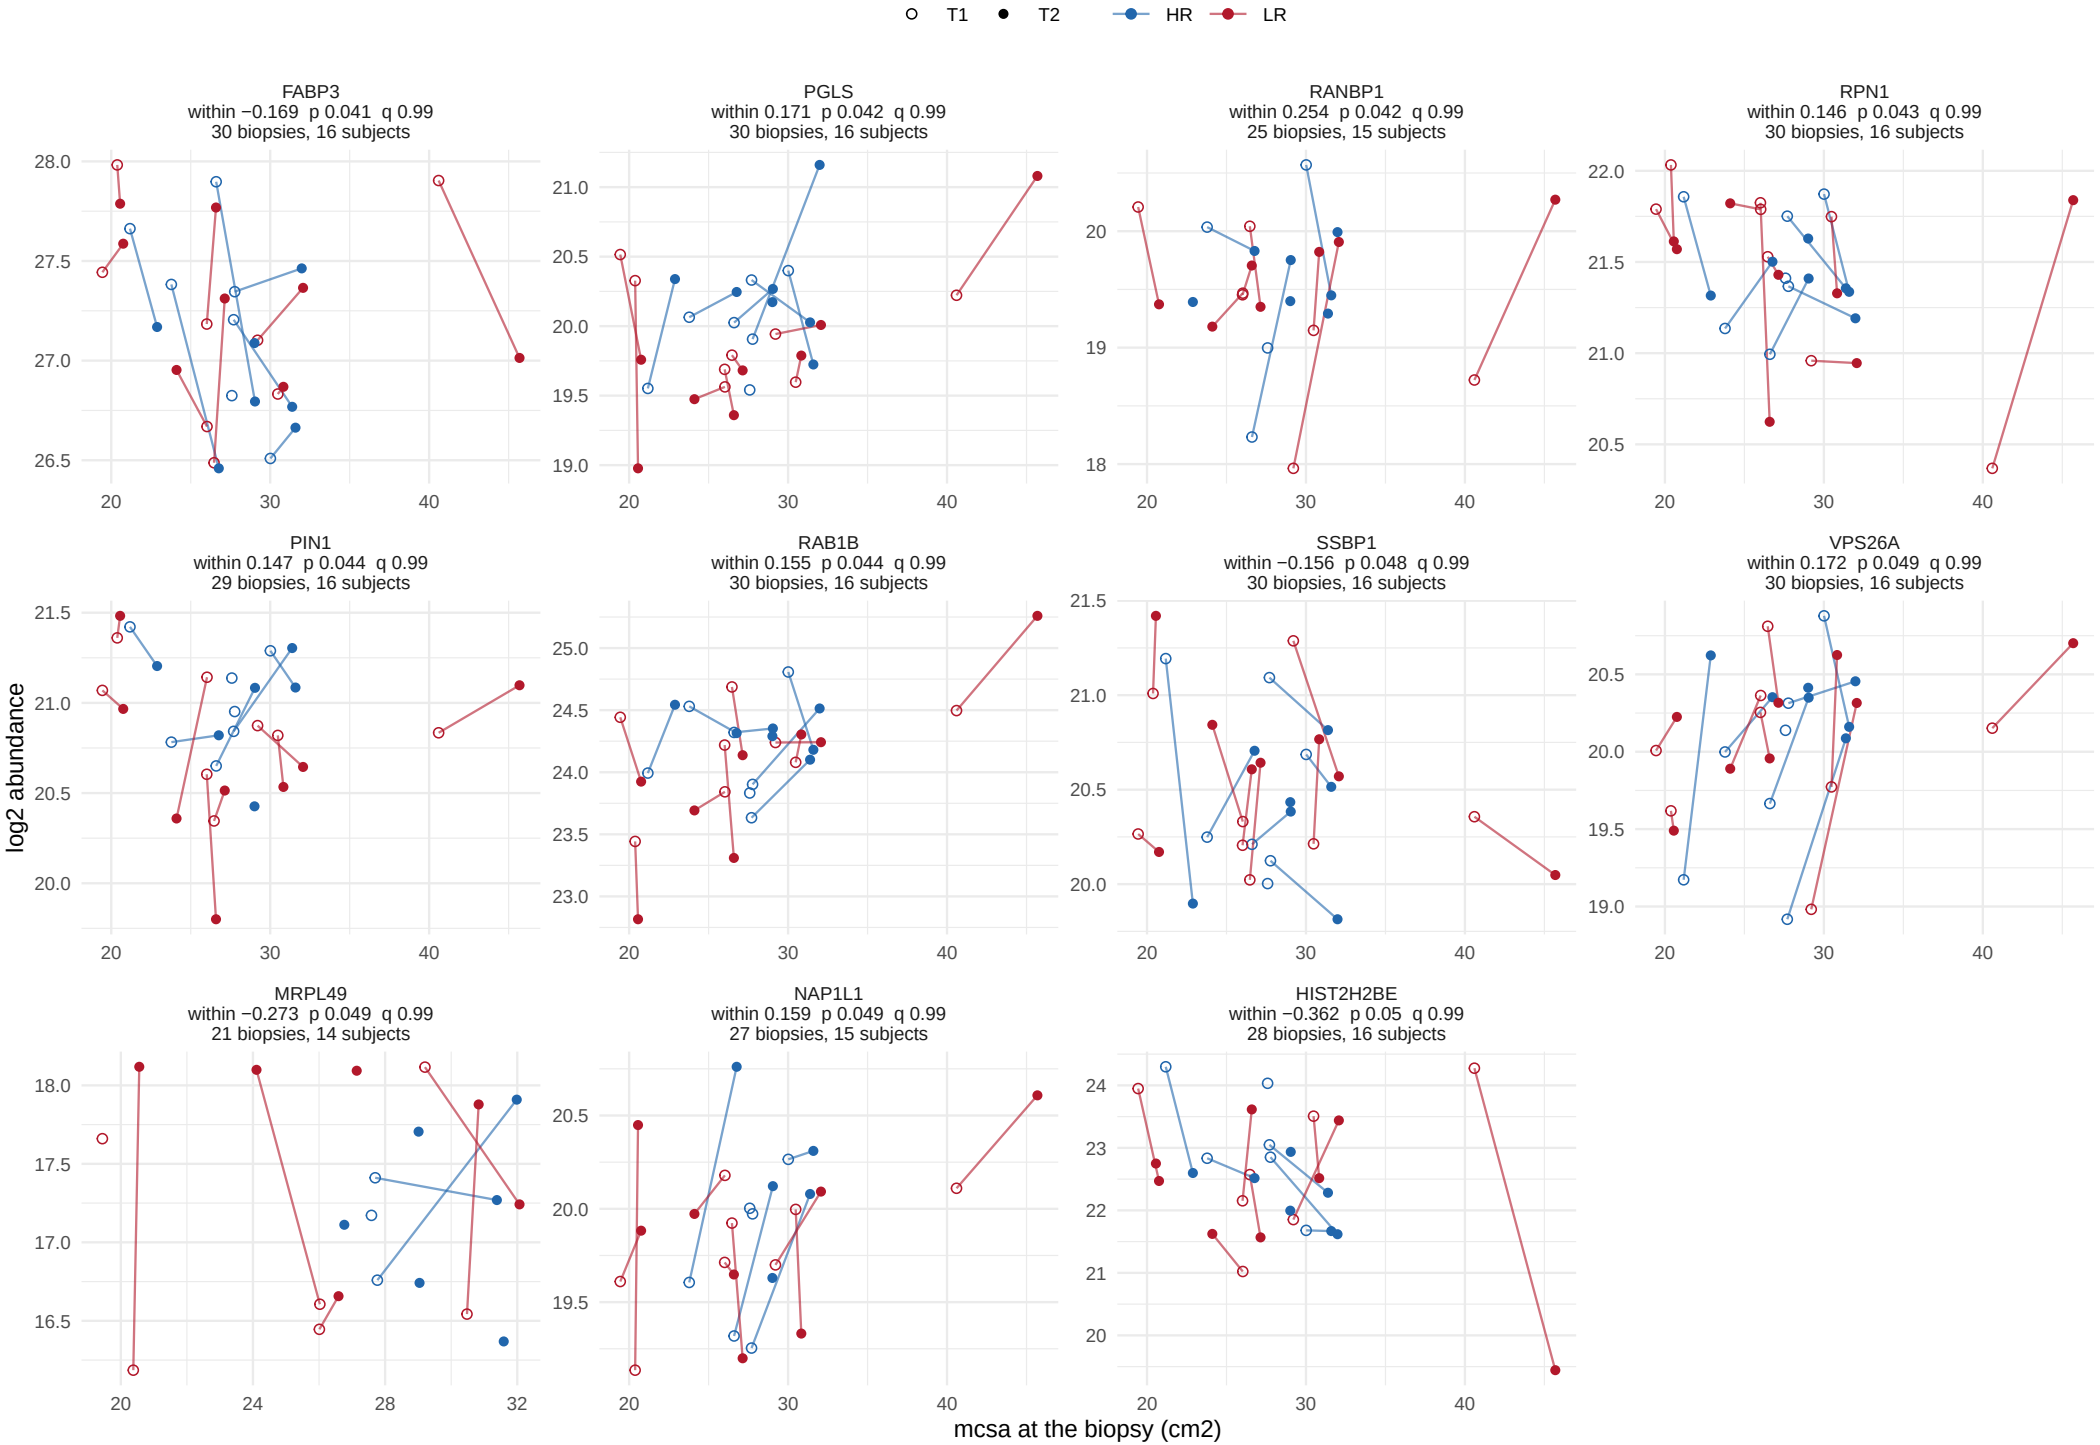

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

mcsa, between−person term


216 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 1 of 18.

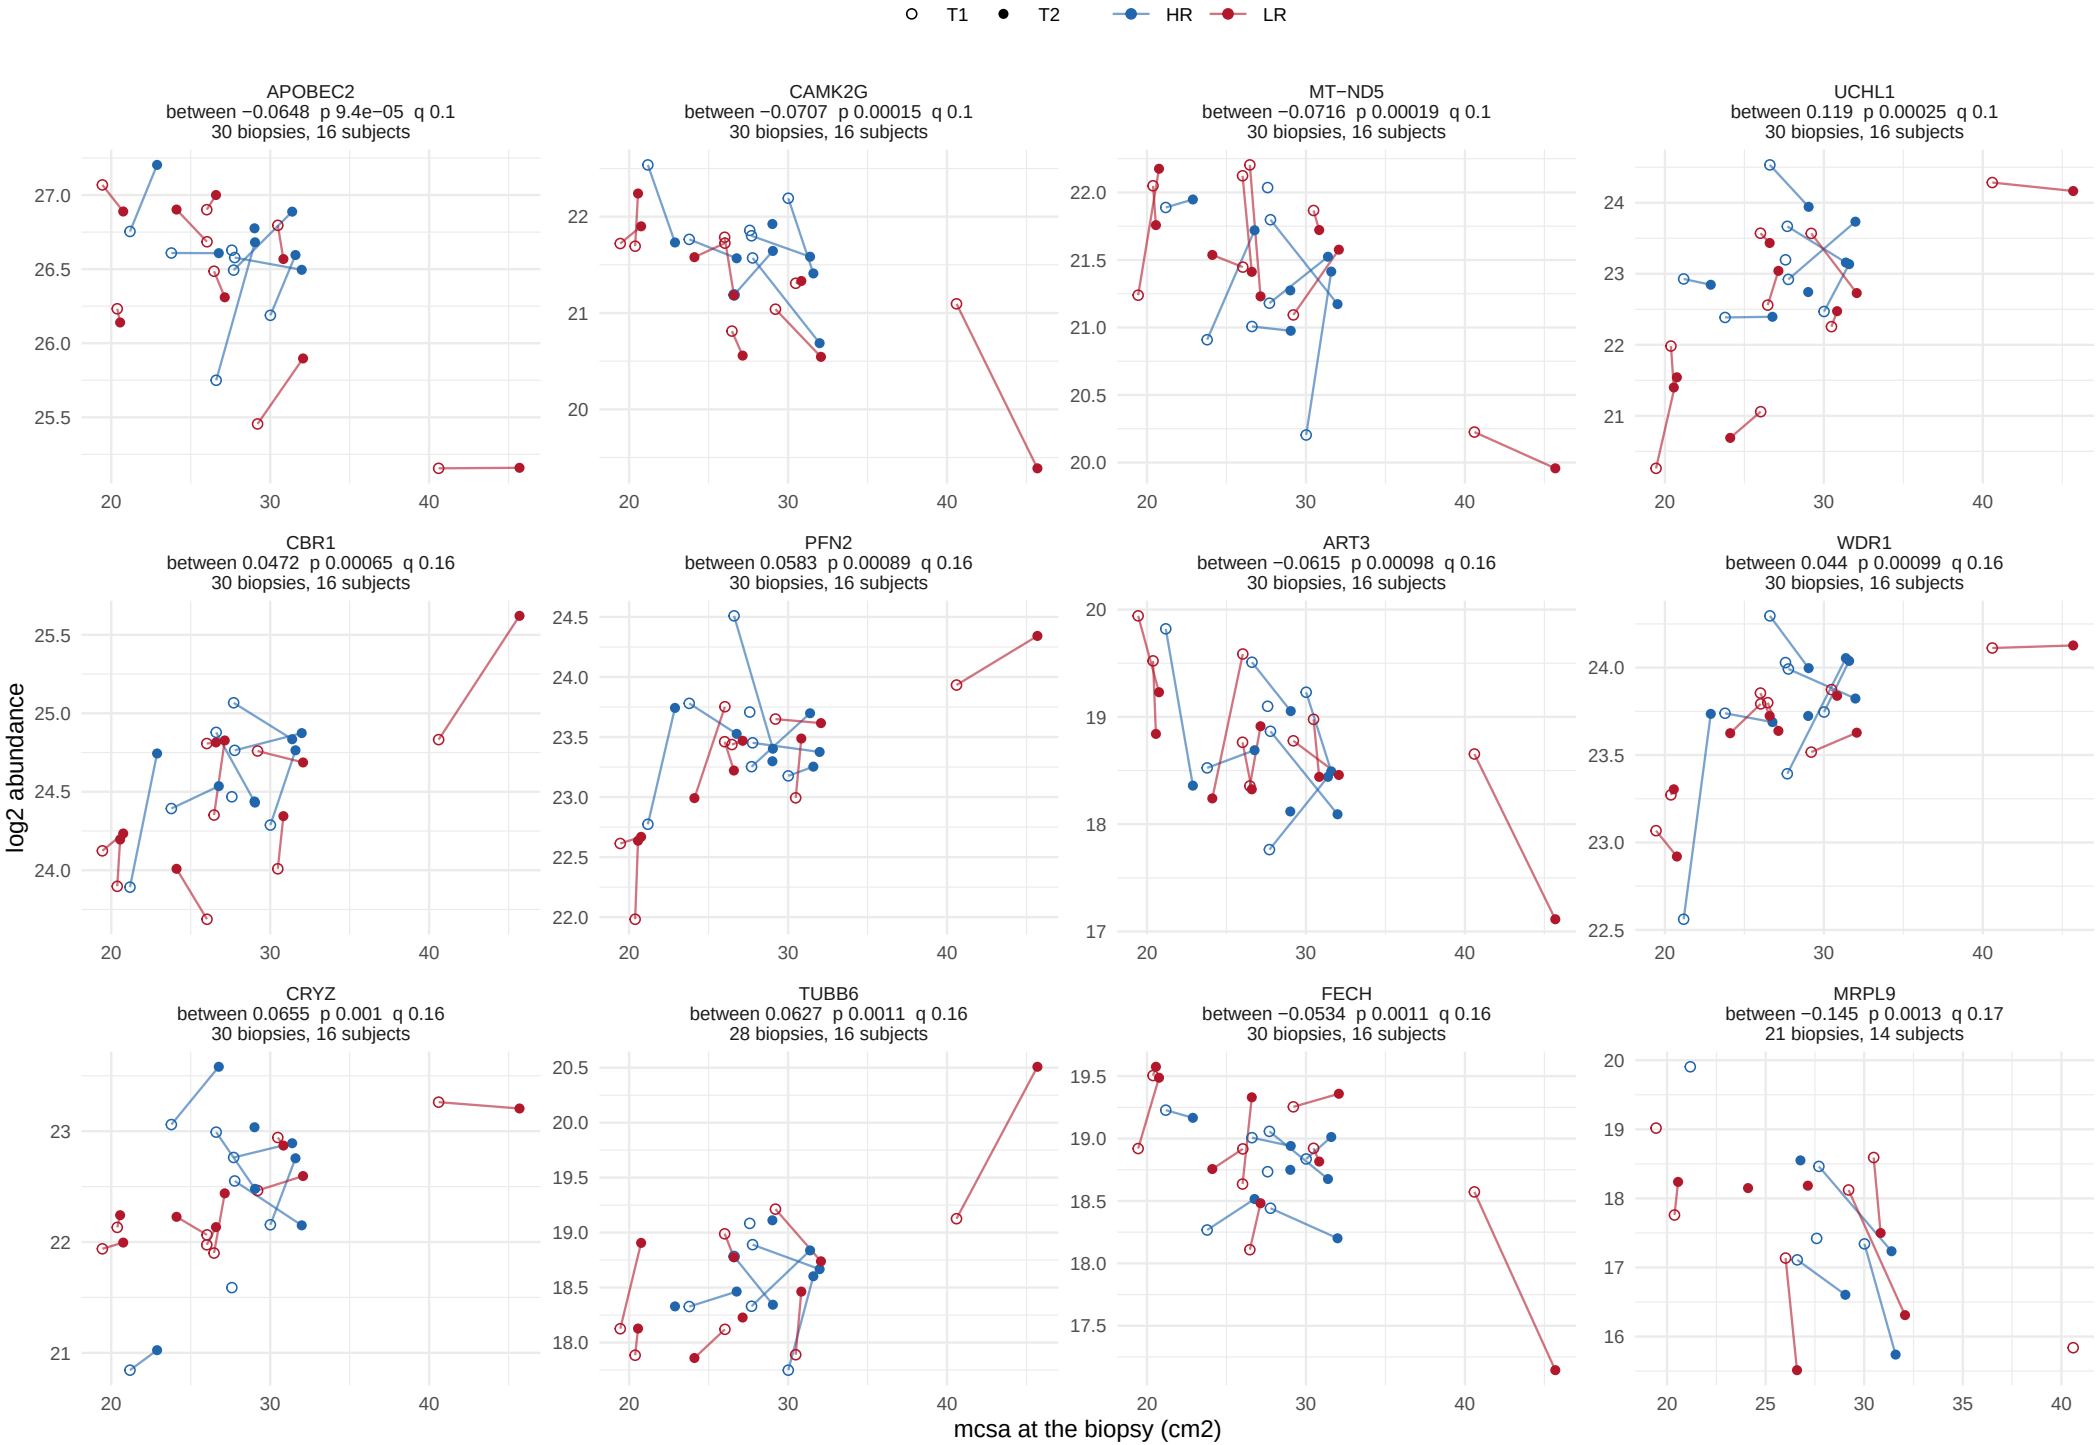

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

mcsa, between−person term


216 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 2 of 18.

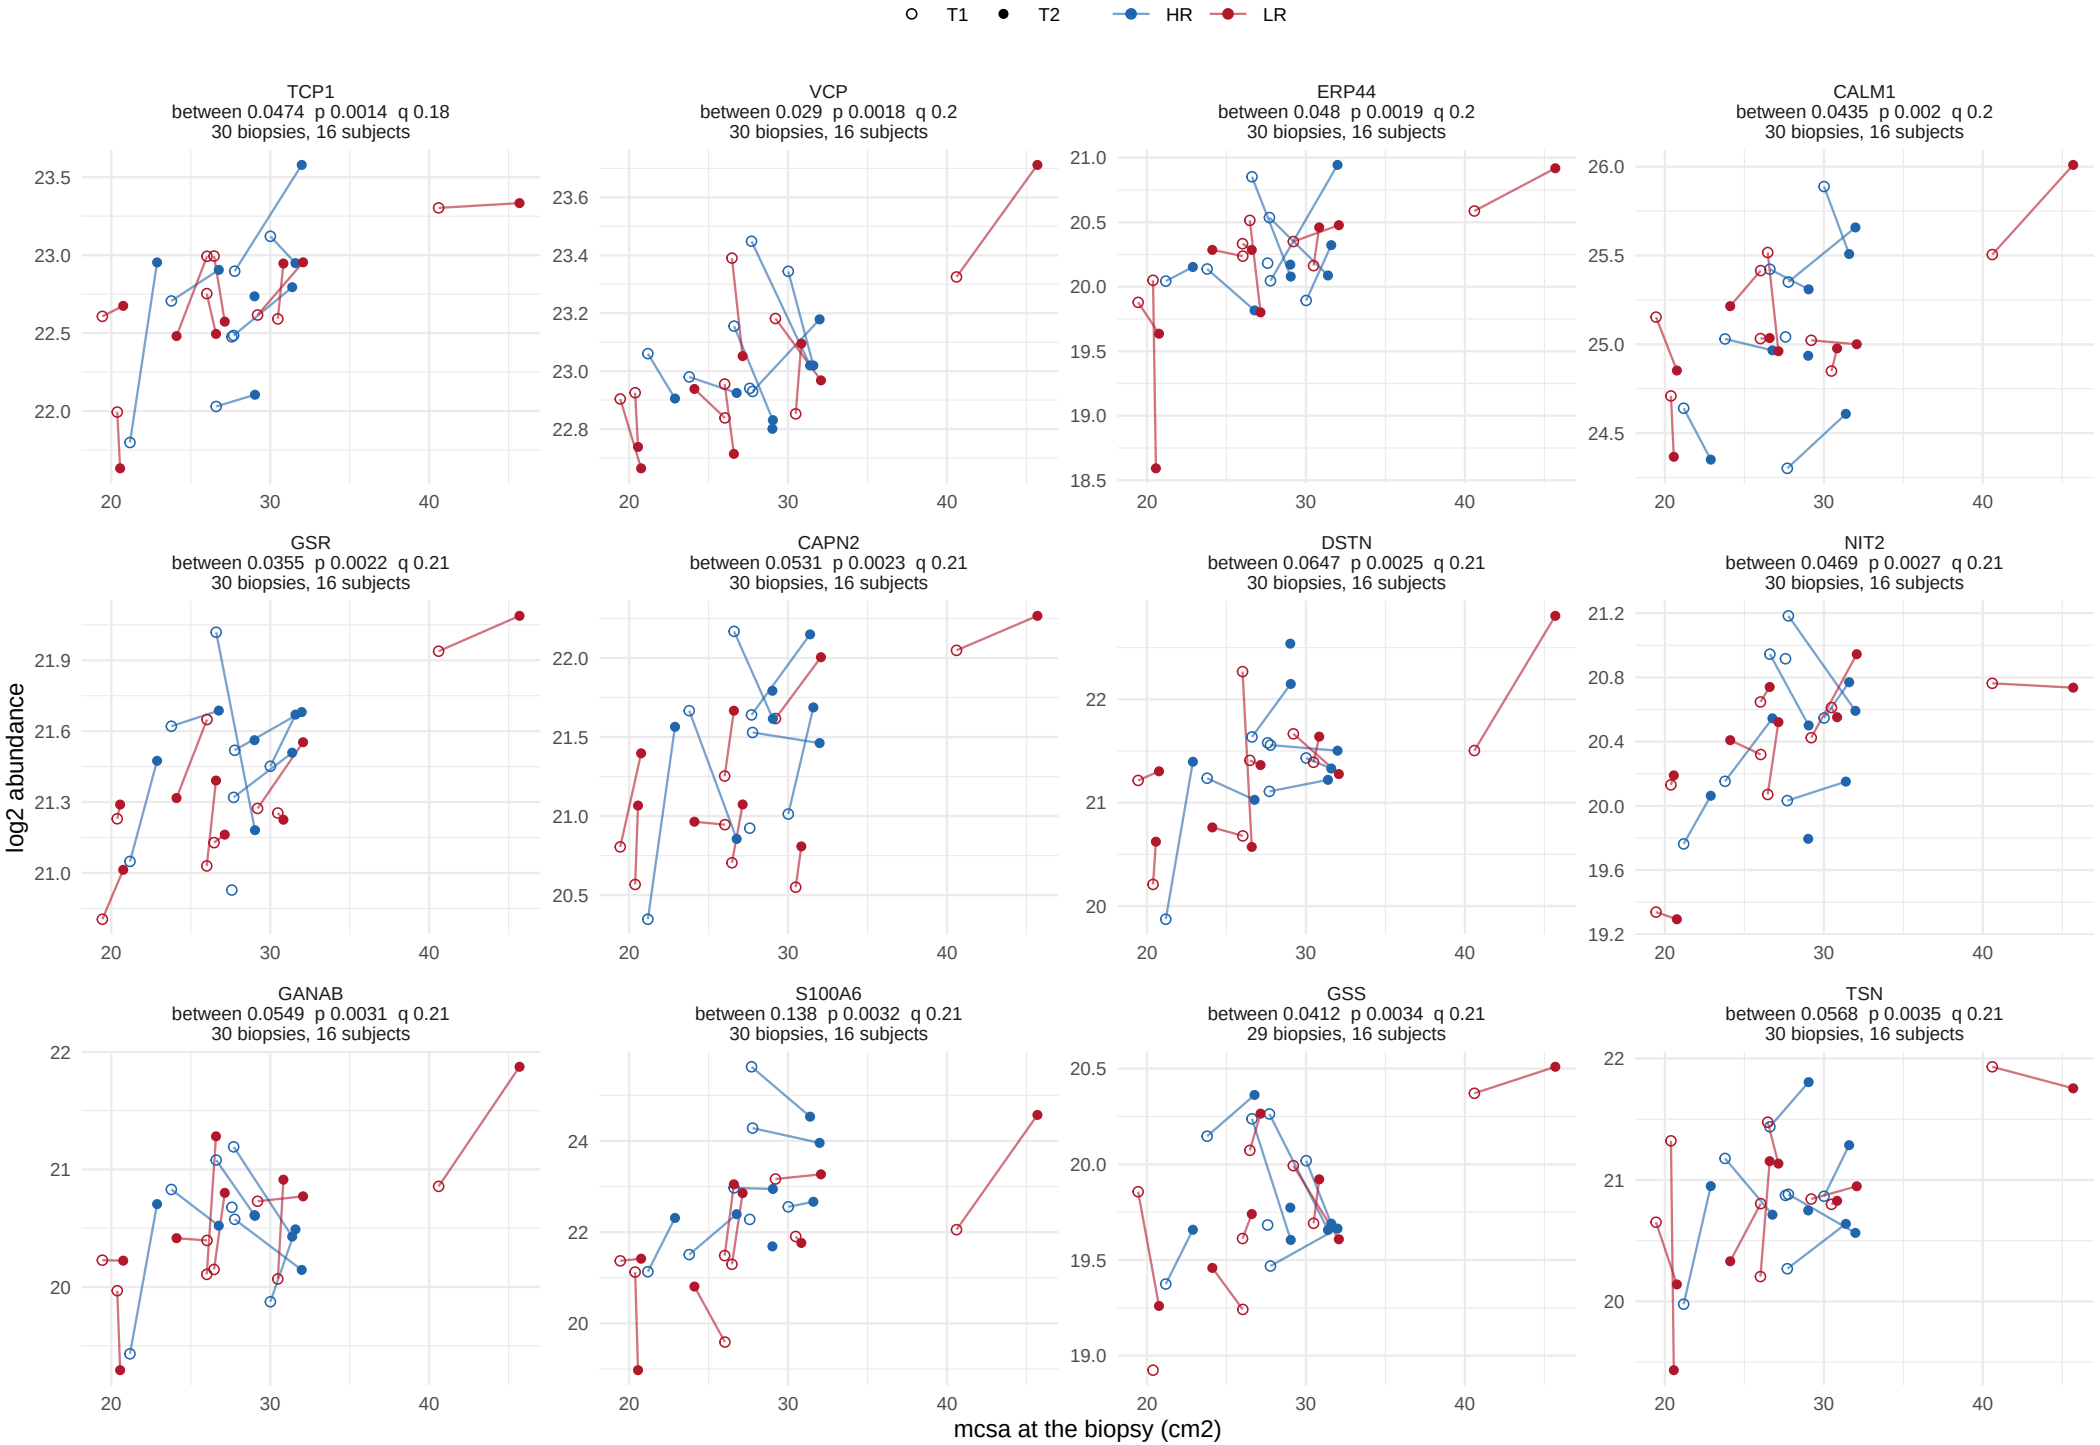

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

mcsa, between−person term


216 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 3 of 18.

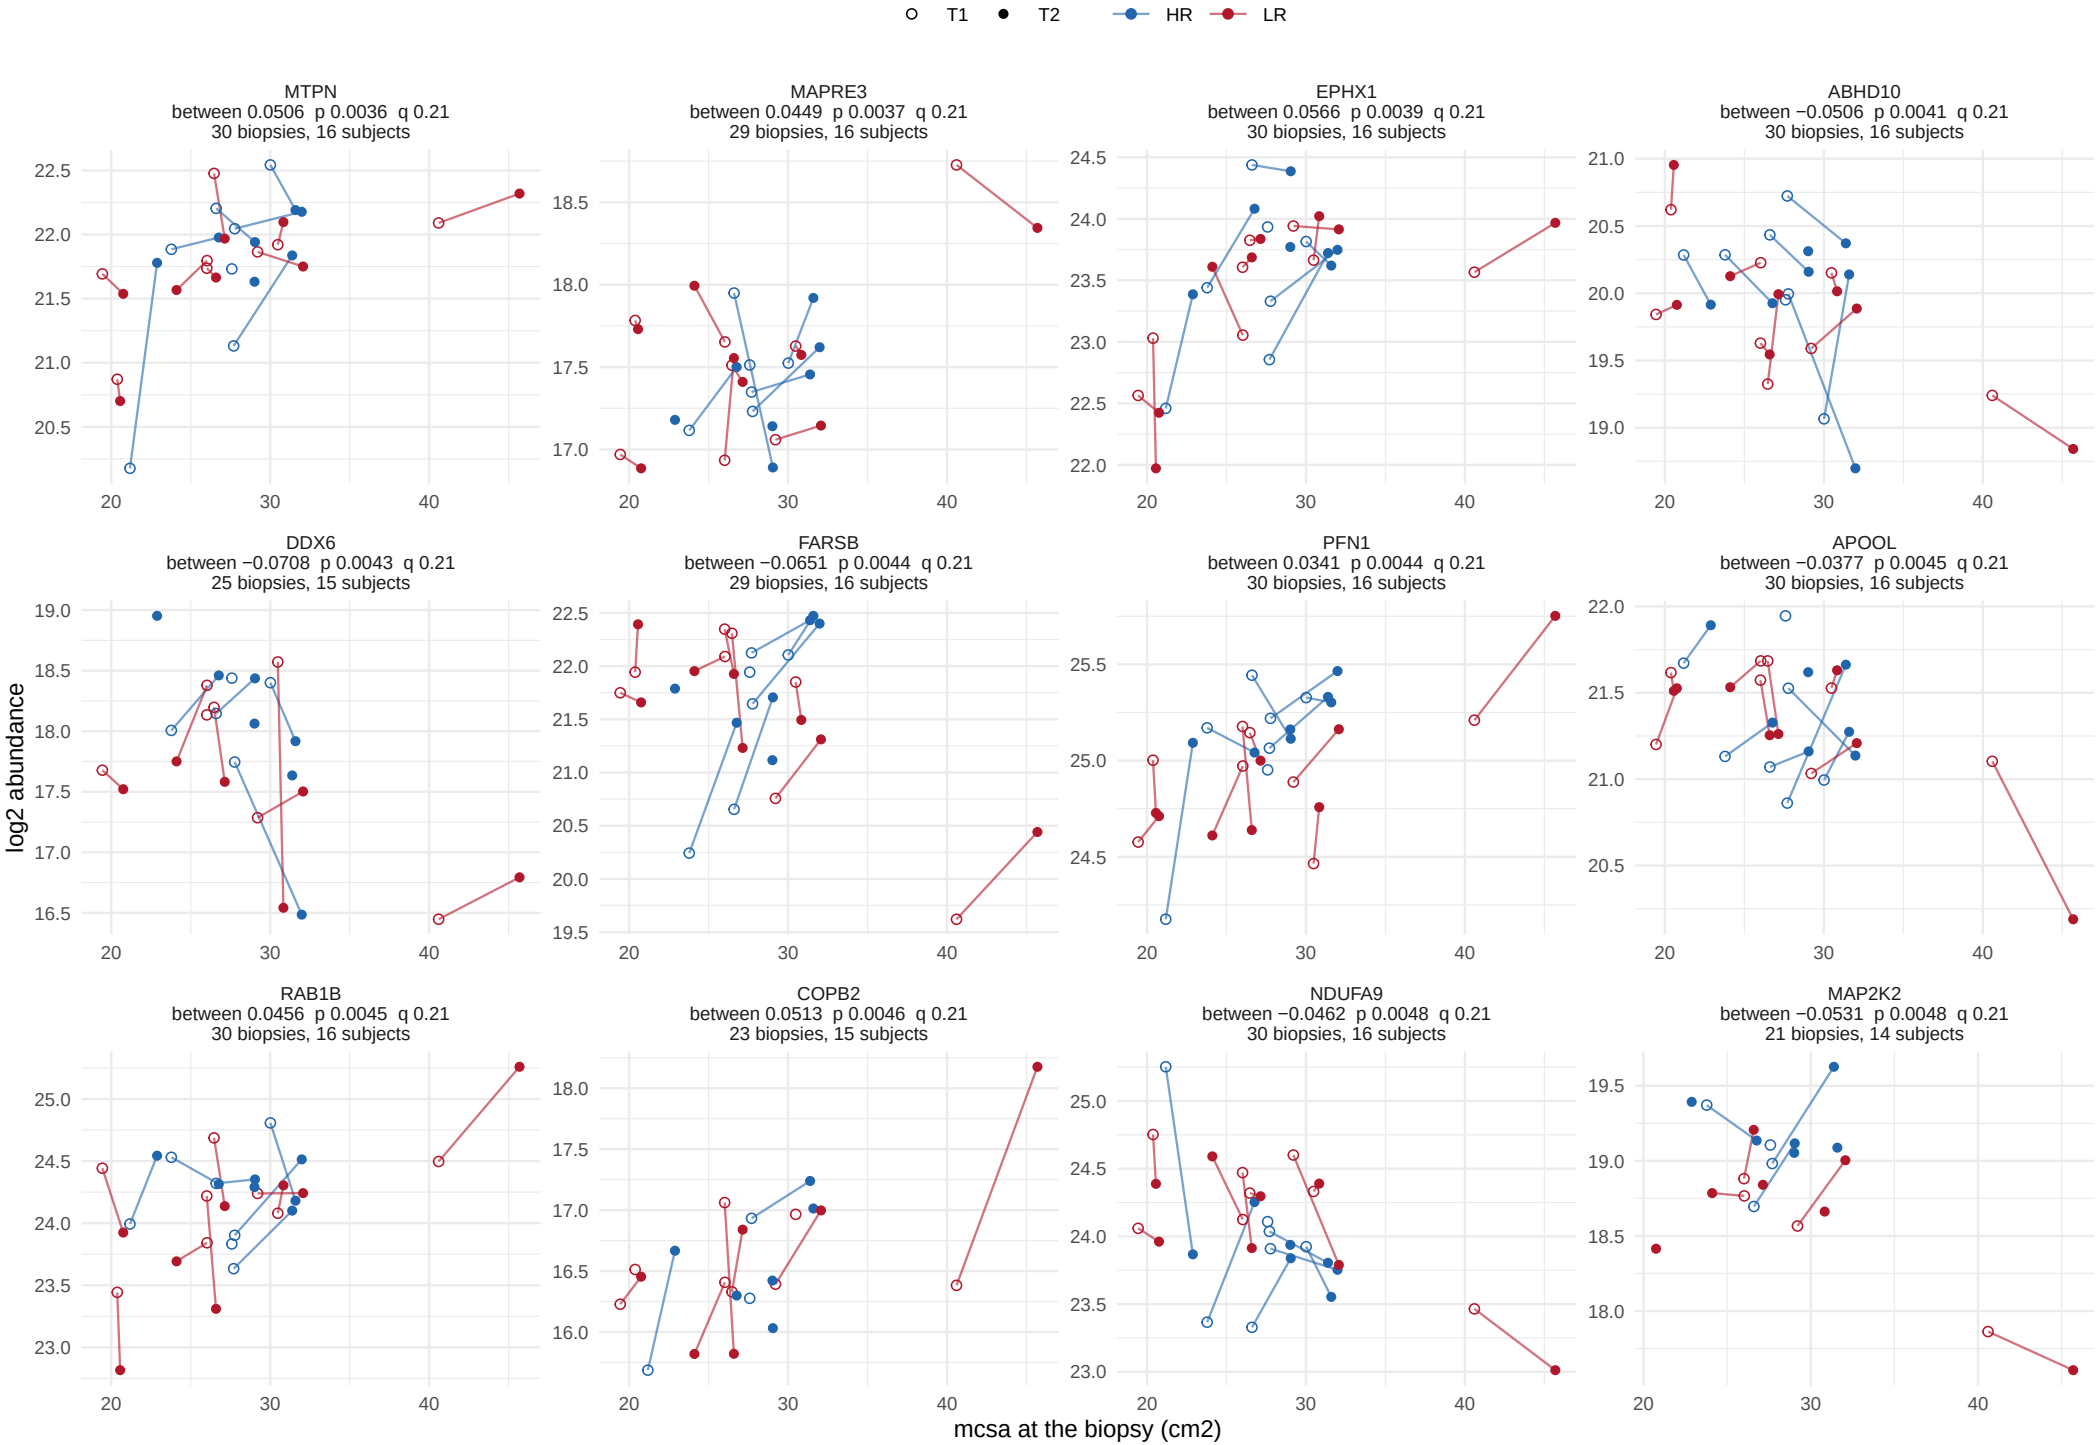

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

mcsa, between−person term


216 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 4 of 18.

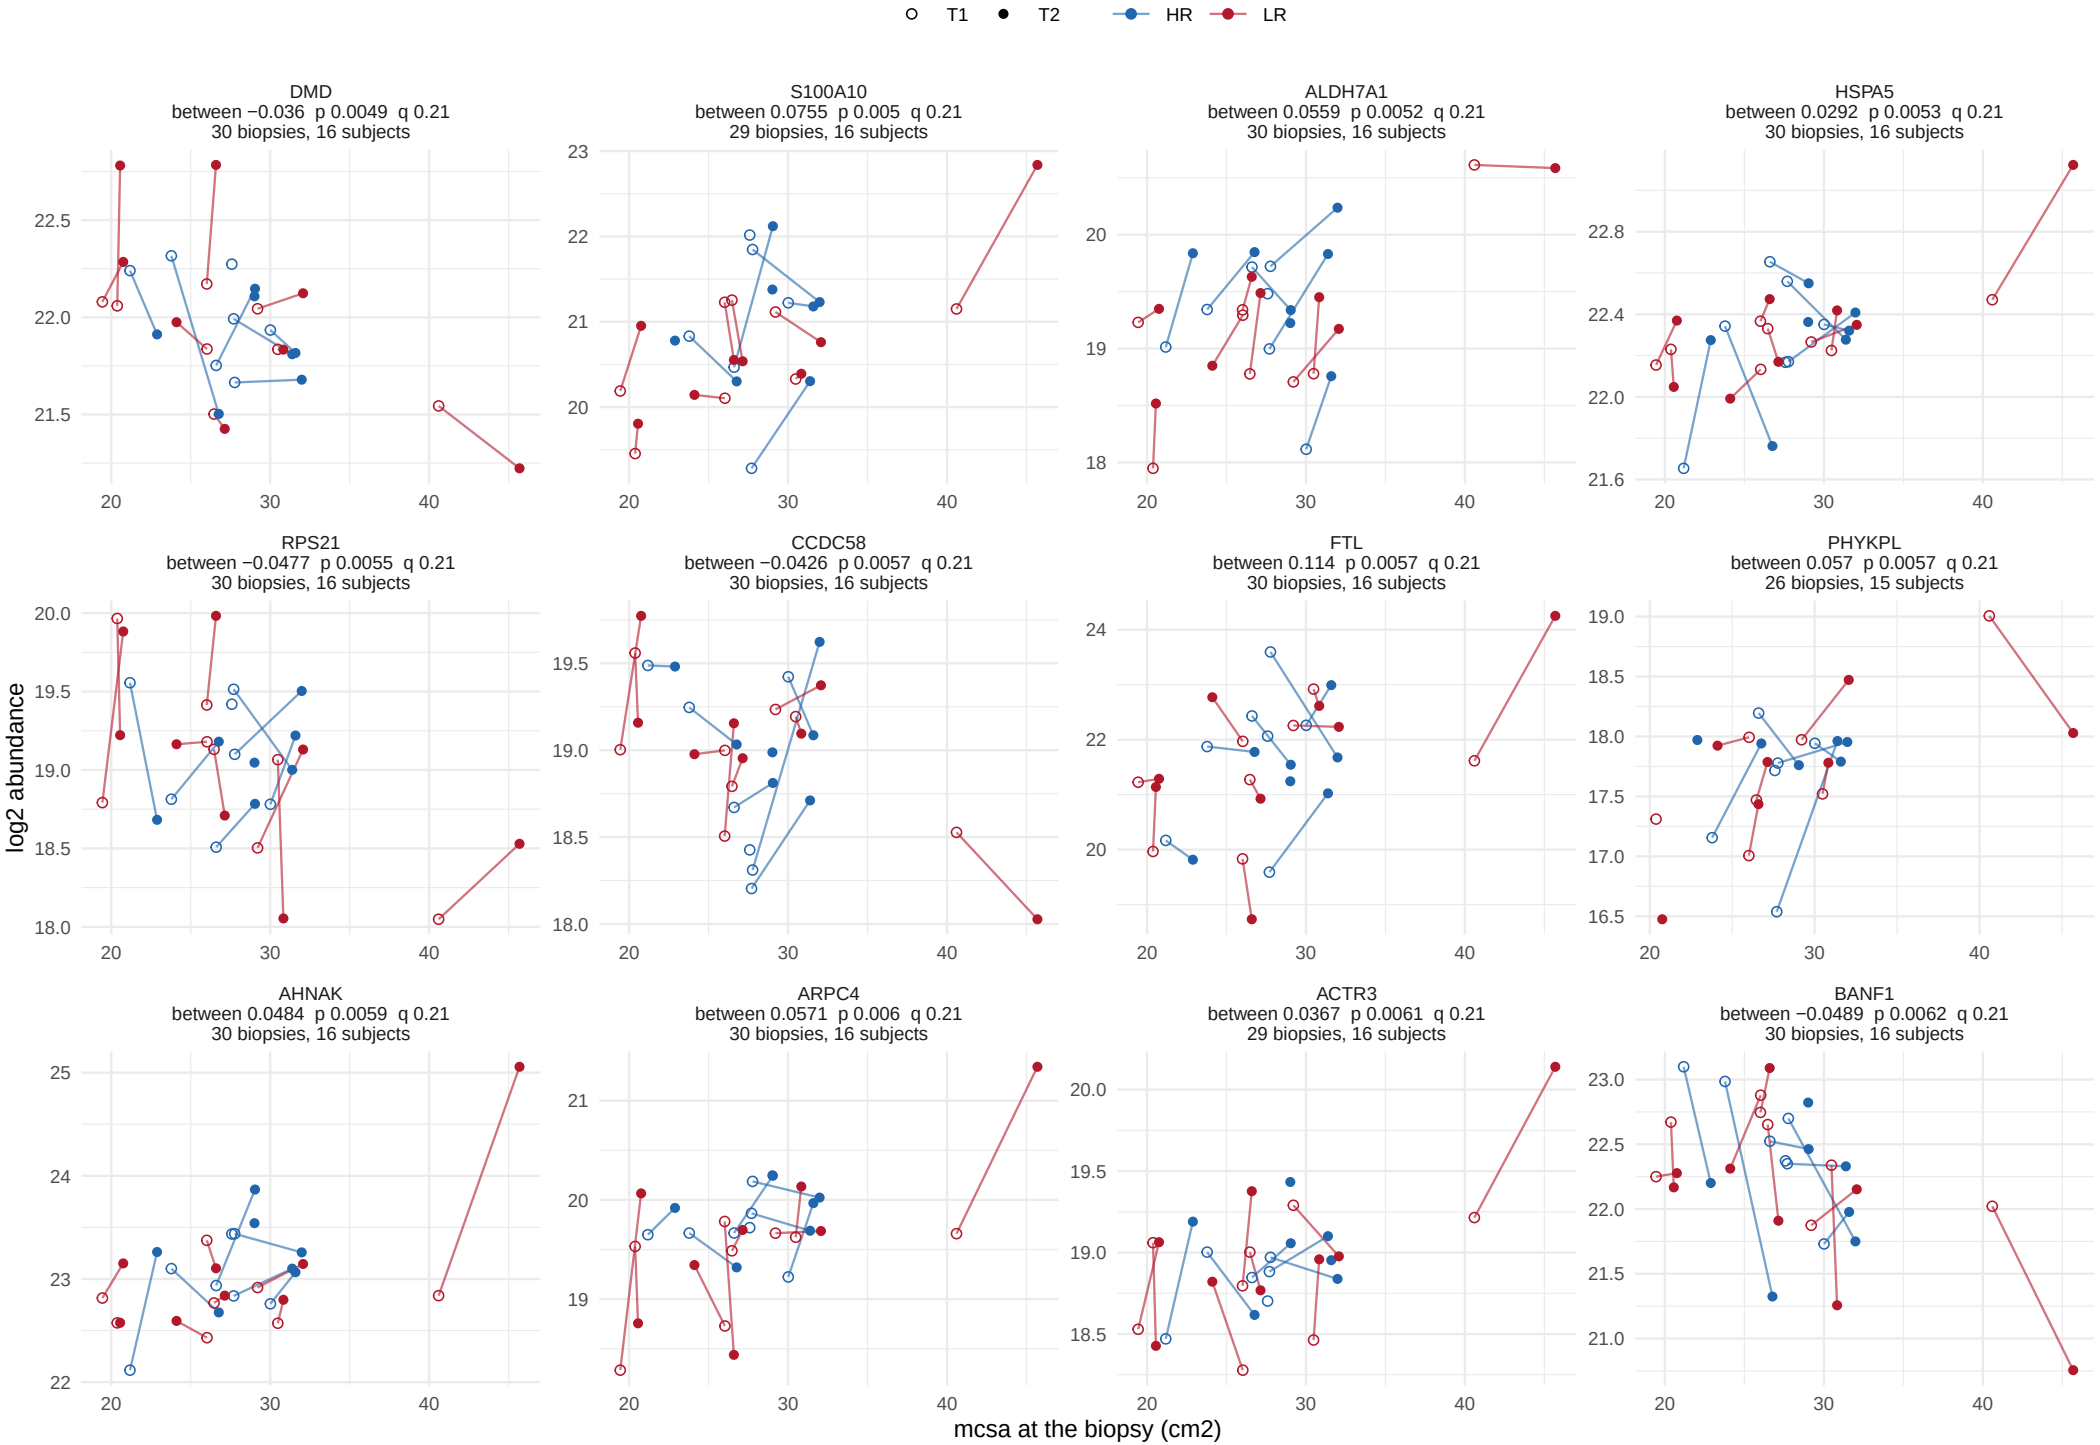

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

mcsa, between−person term


216 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 5 of 18.

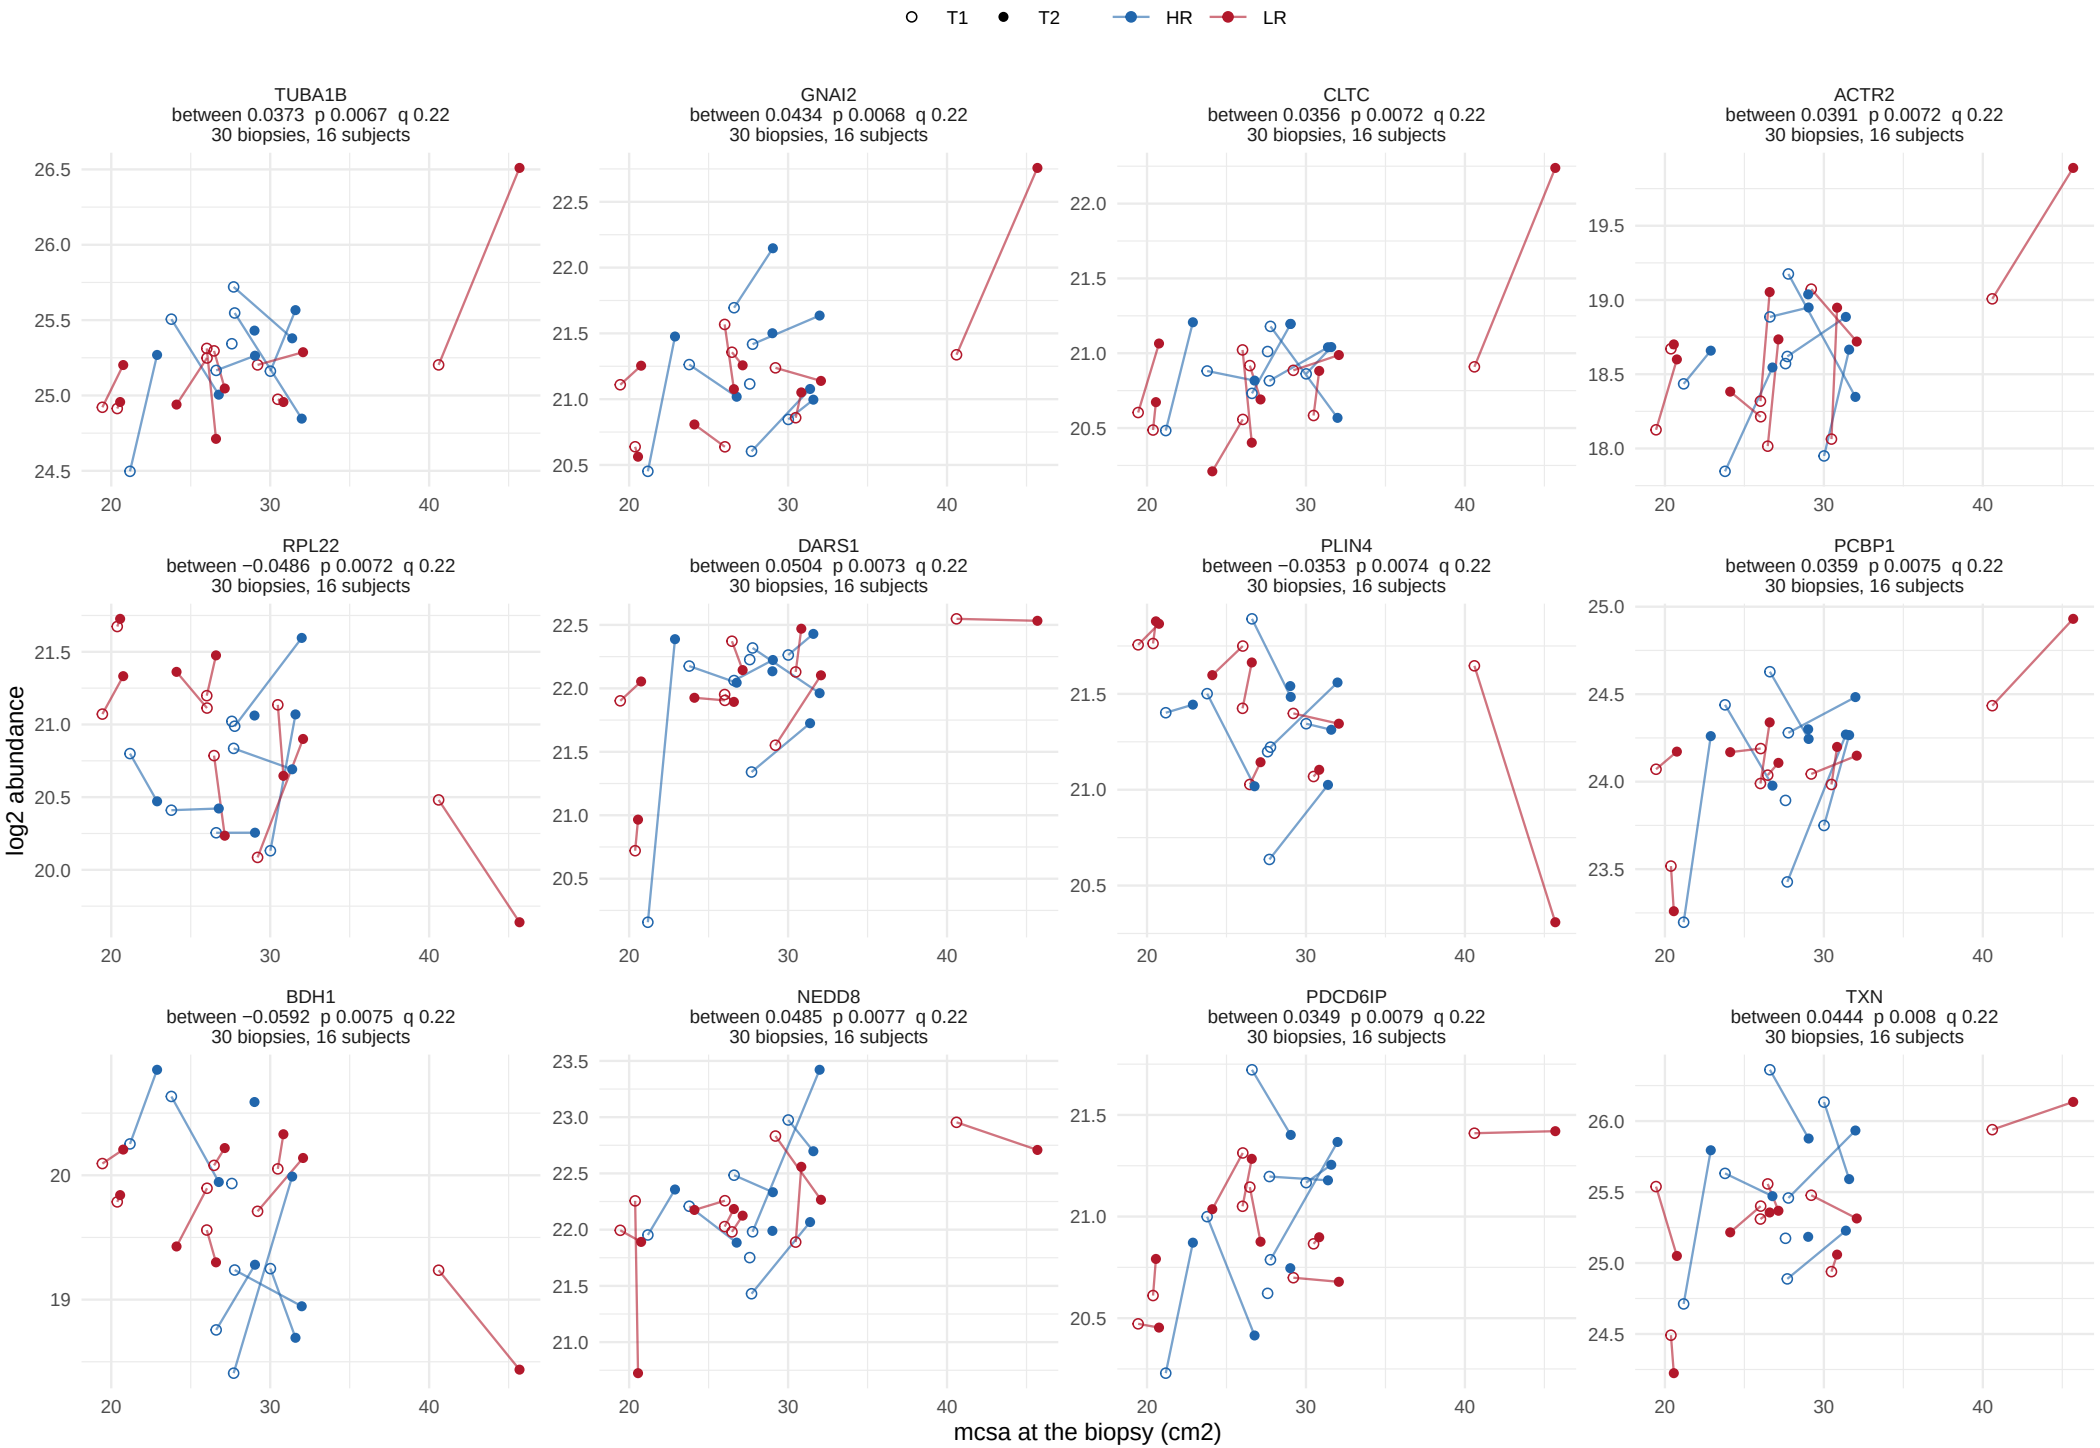

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

mcsa, between−person term


216 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 6 of 18.

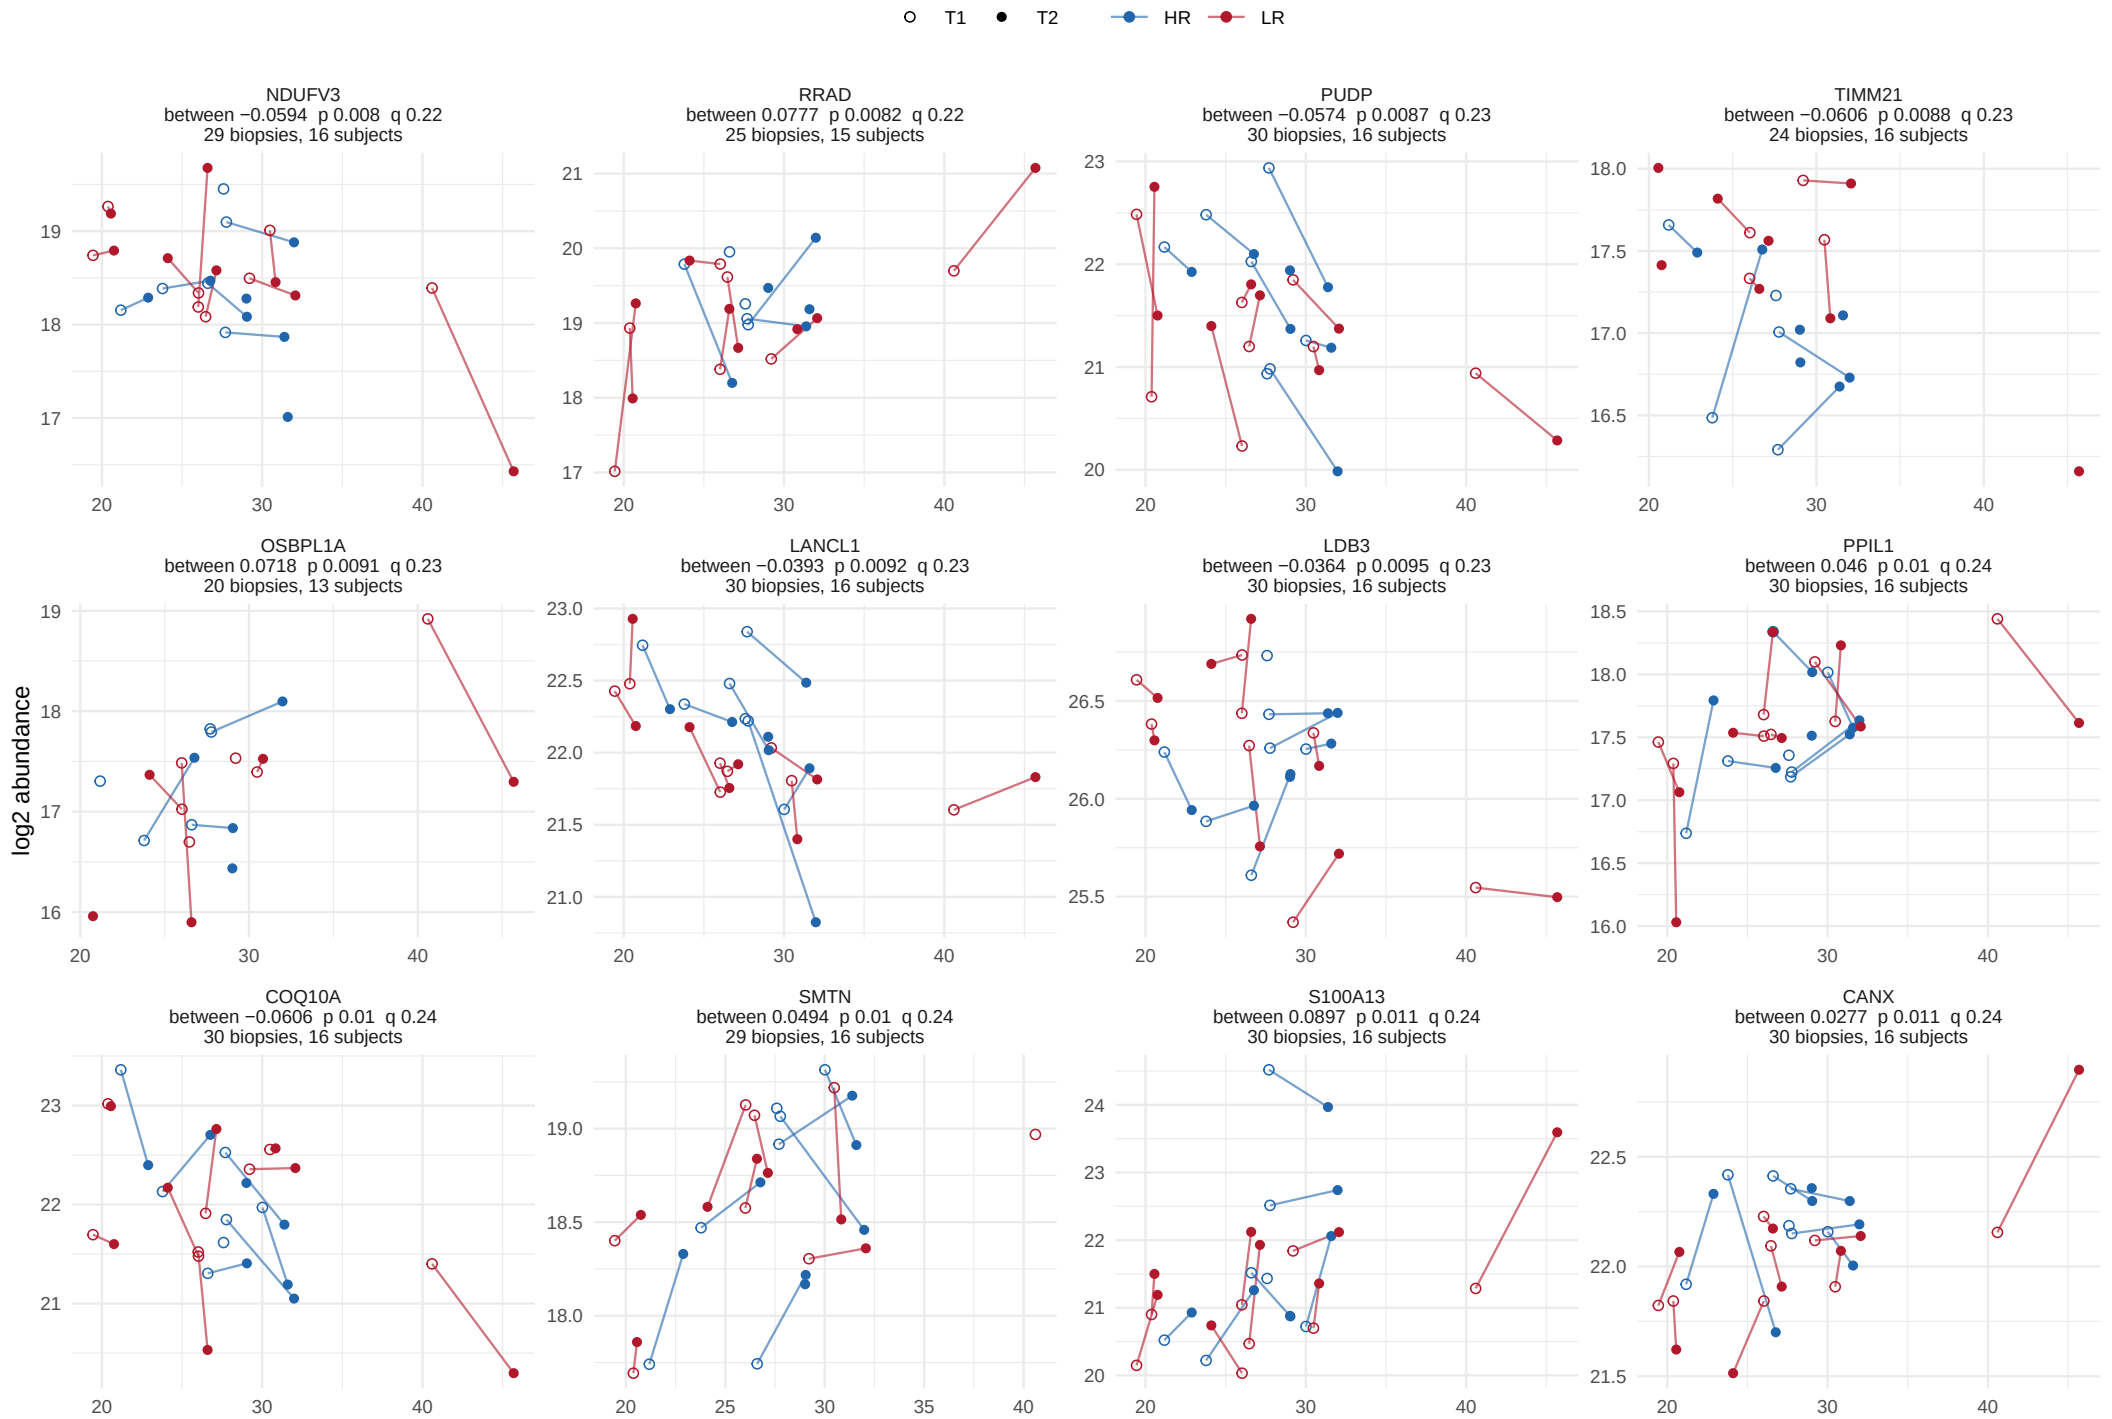

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

mcsa, between−person term


216 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 7 of 18.

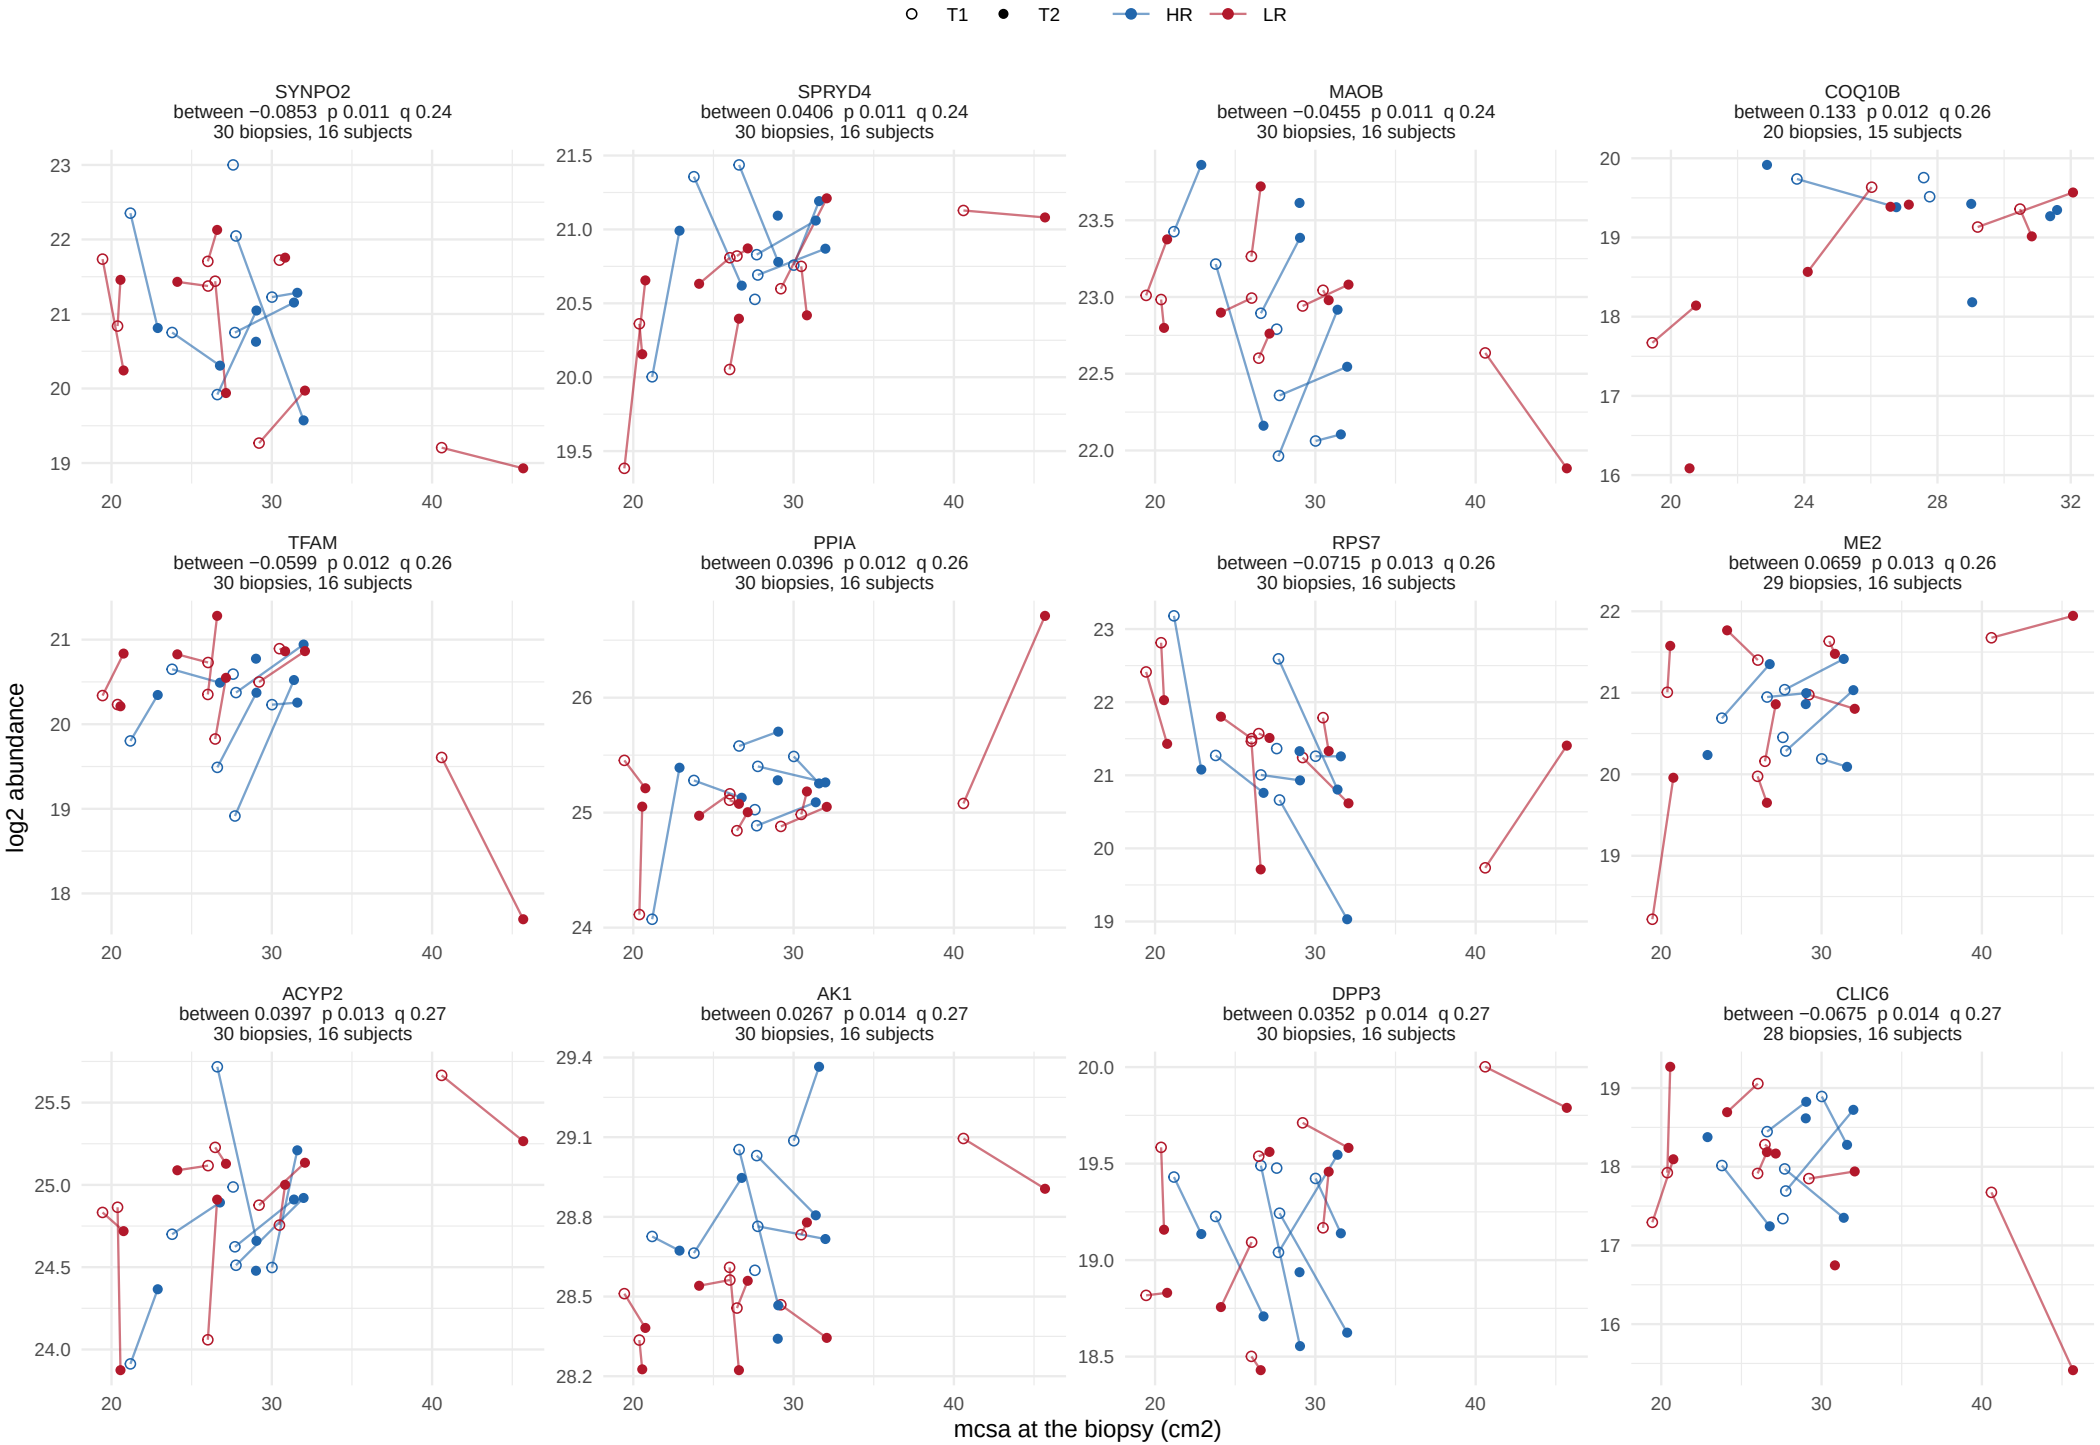

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

mcsa, between−person term


216 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 8 of 18.

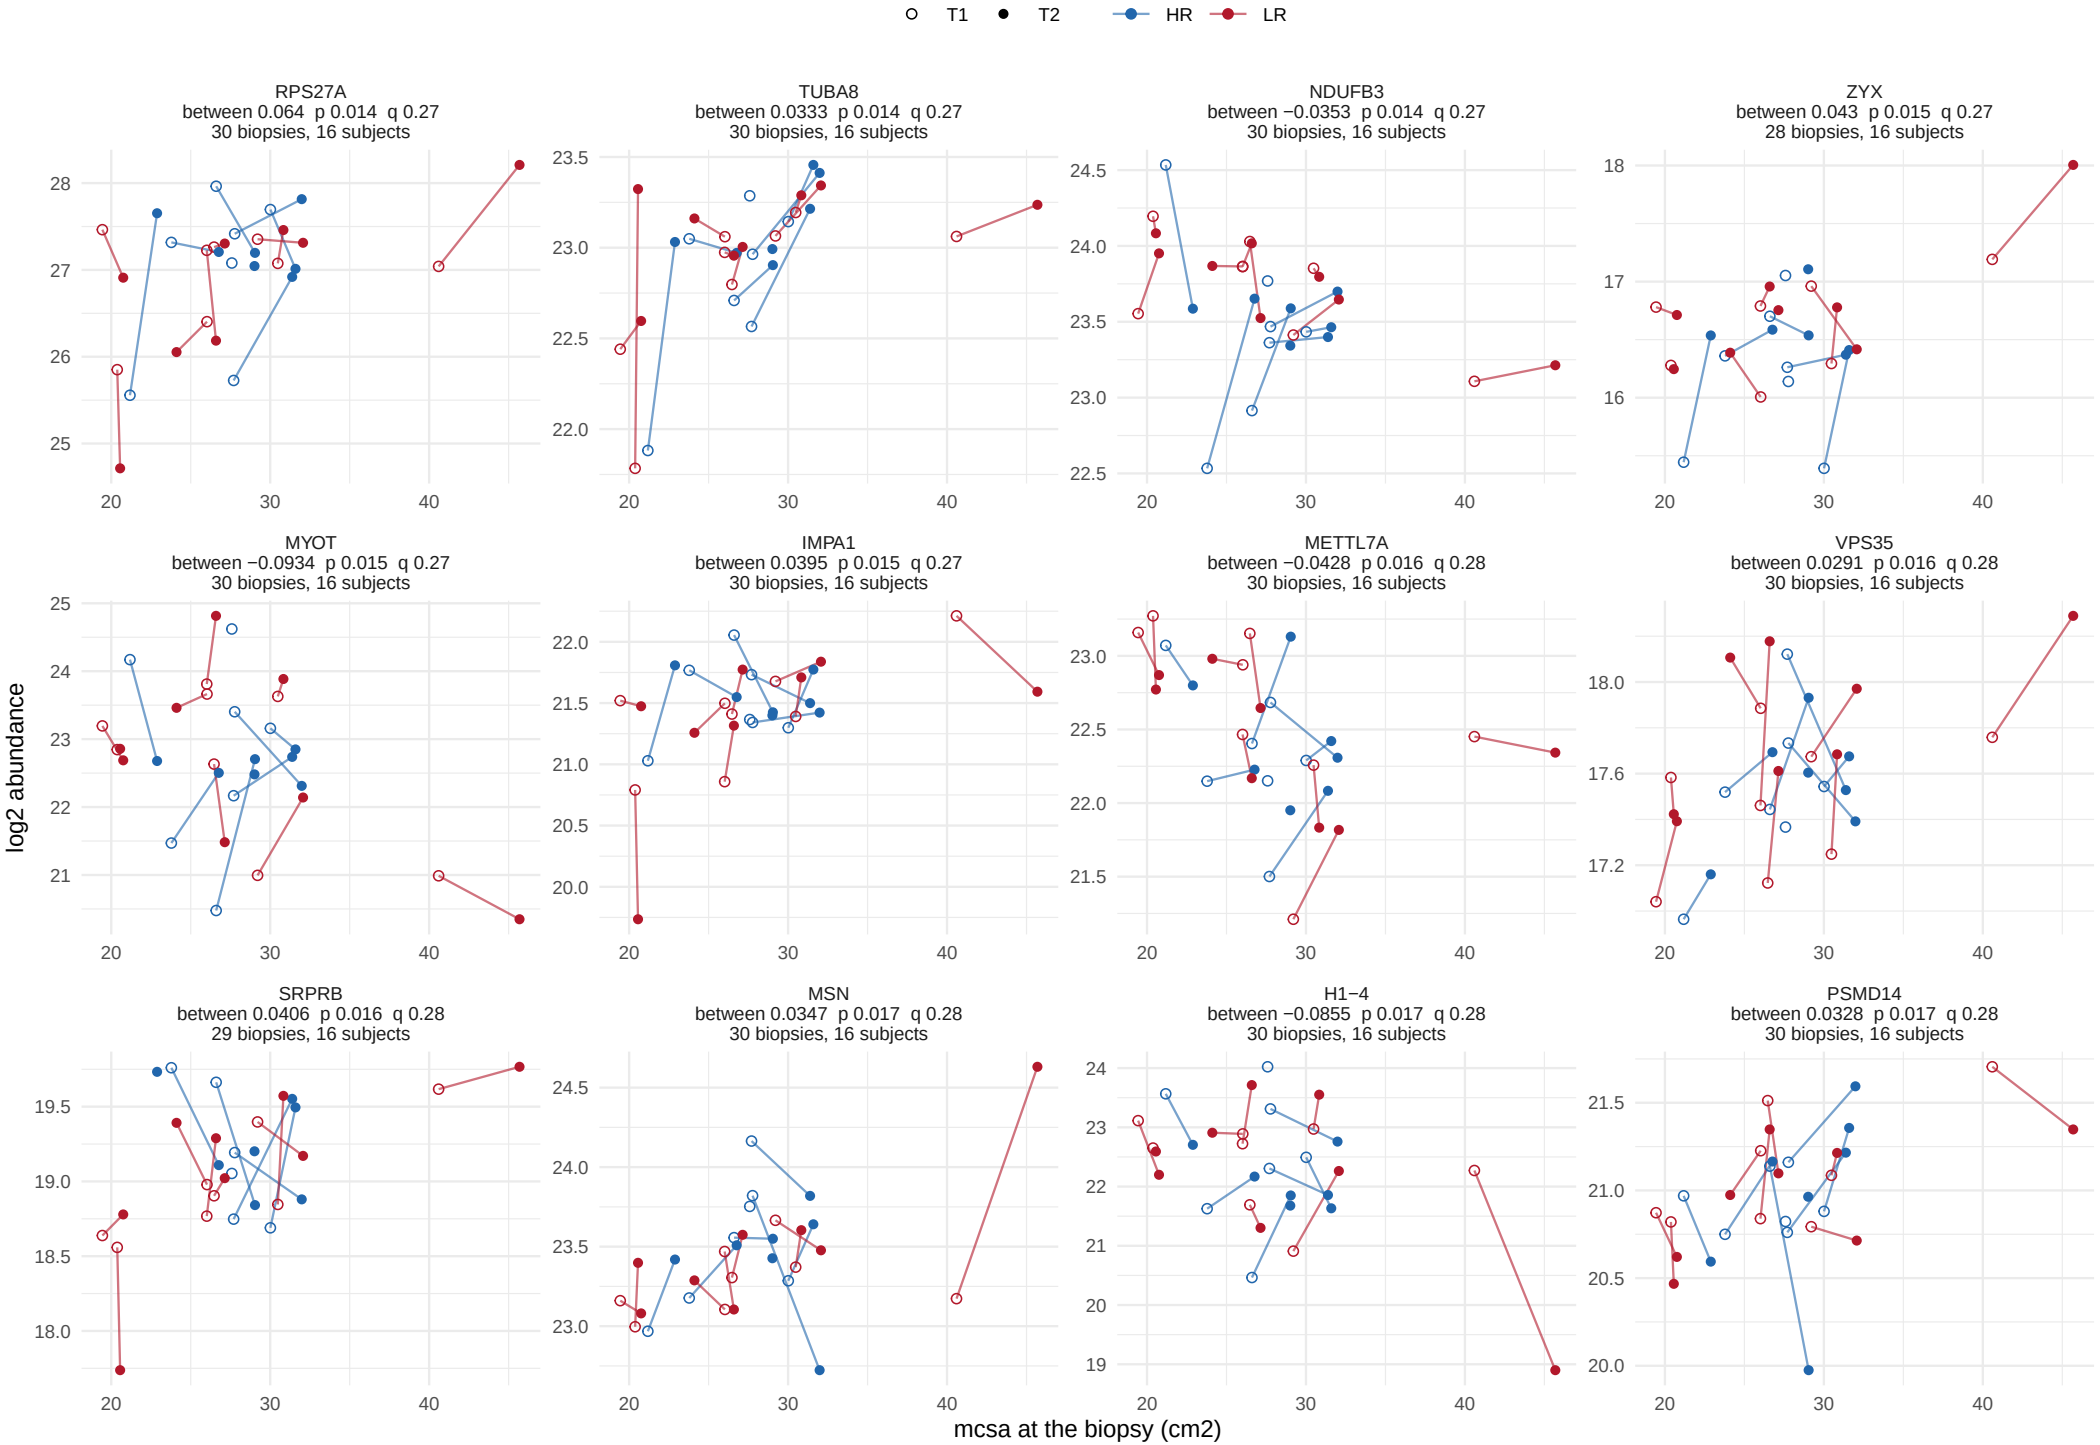

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

mcsa, between−person term


216 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 9 of 18.

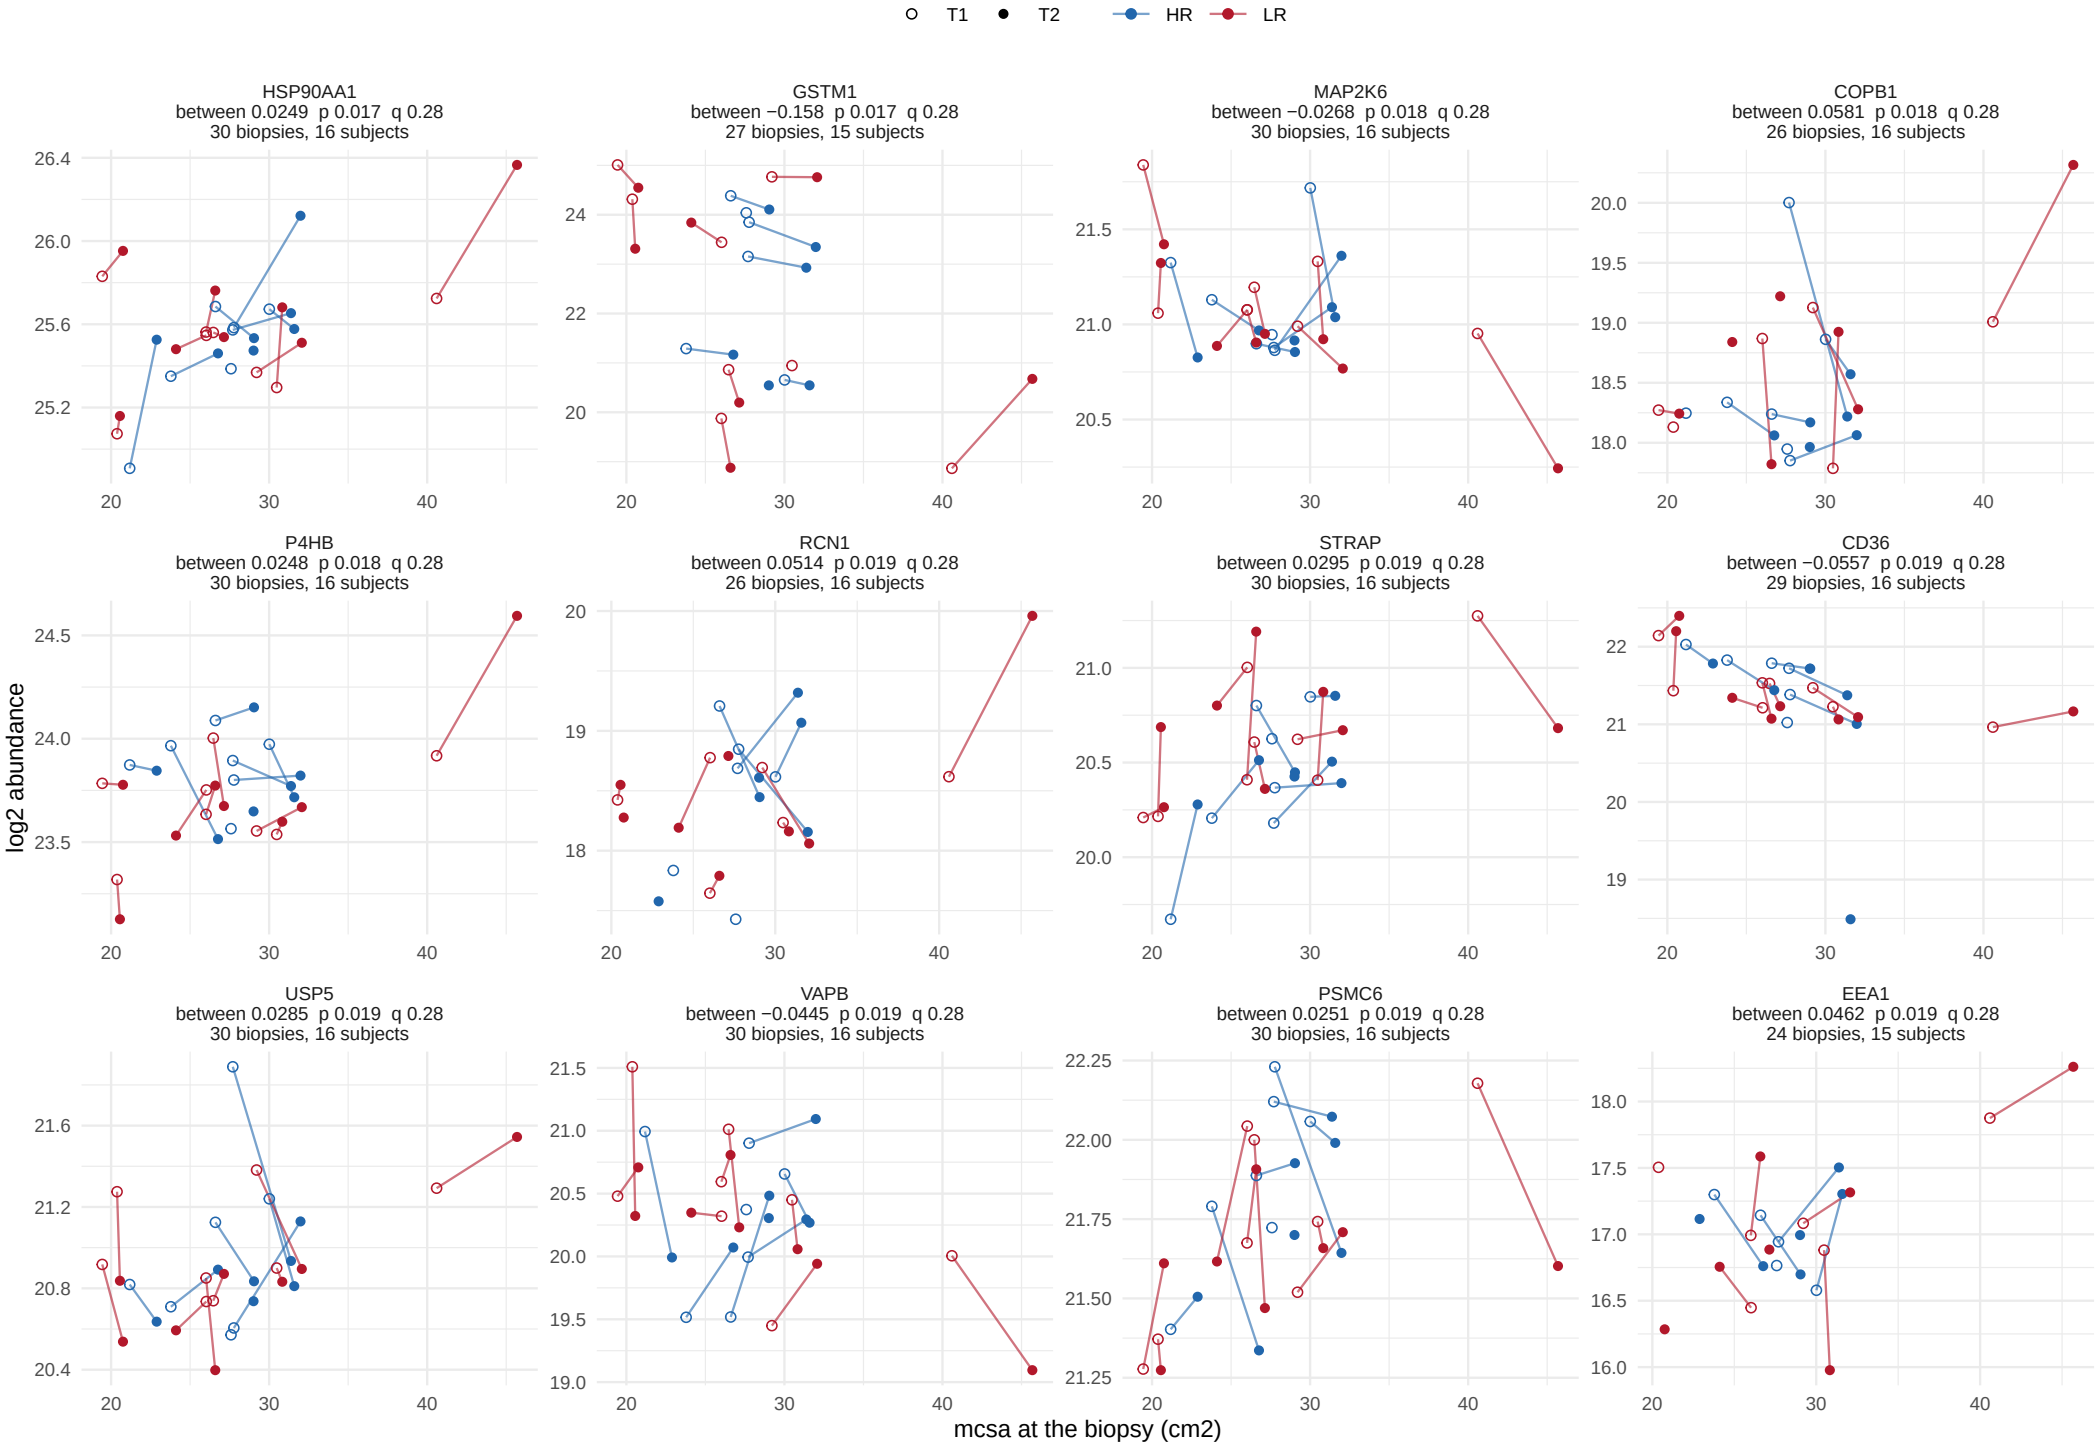

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

mcsa, between−person term


216 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 10 of 18.

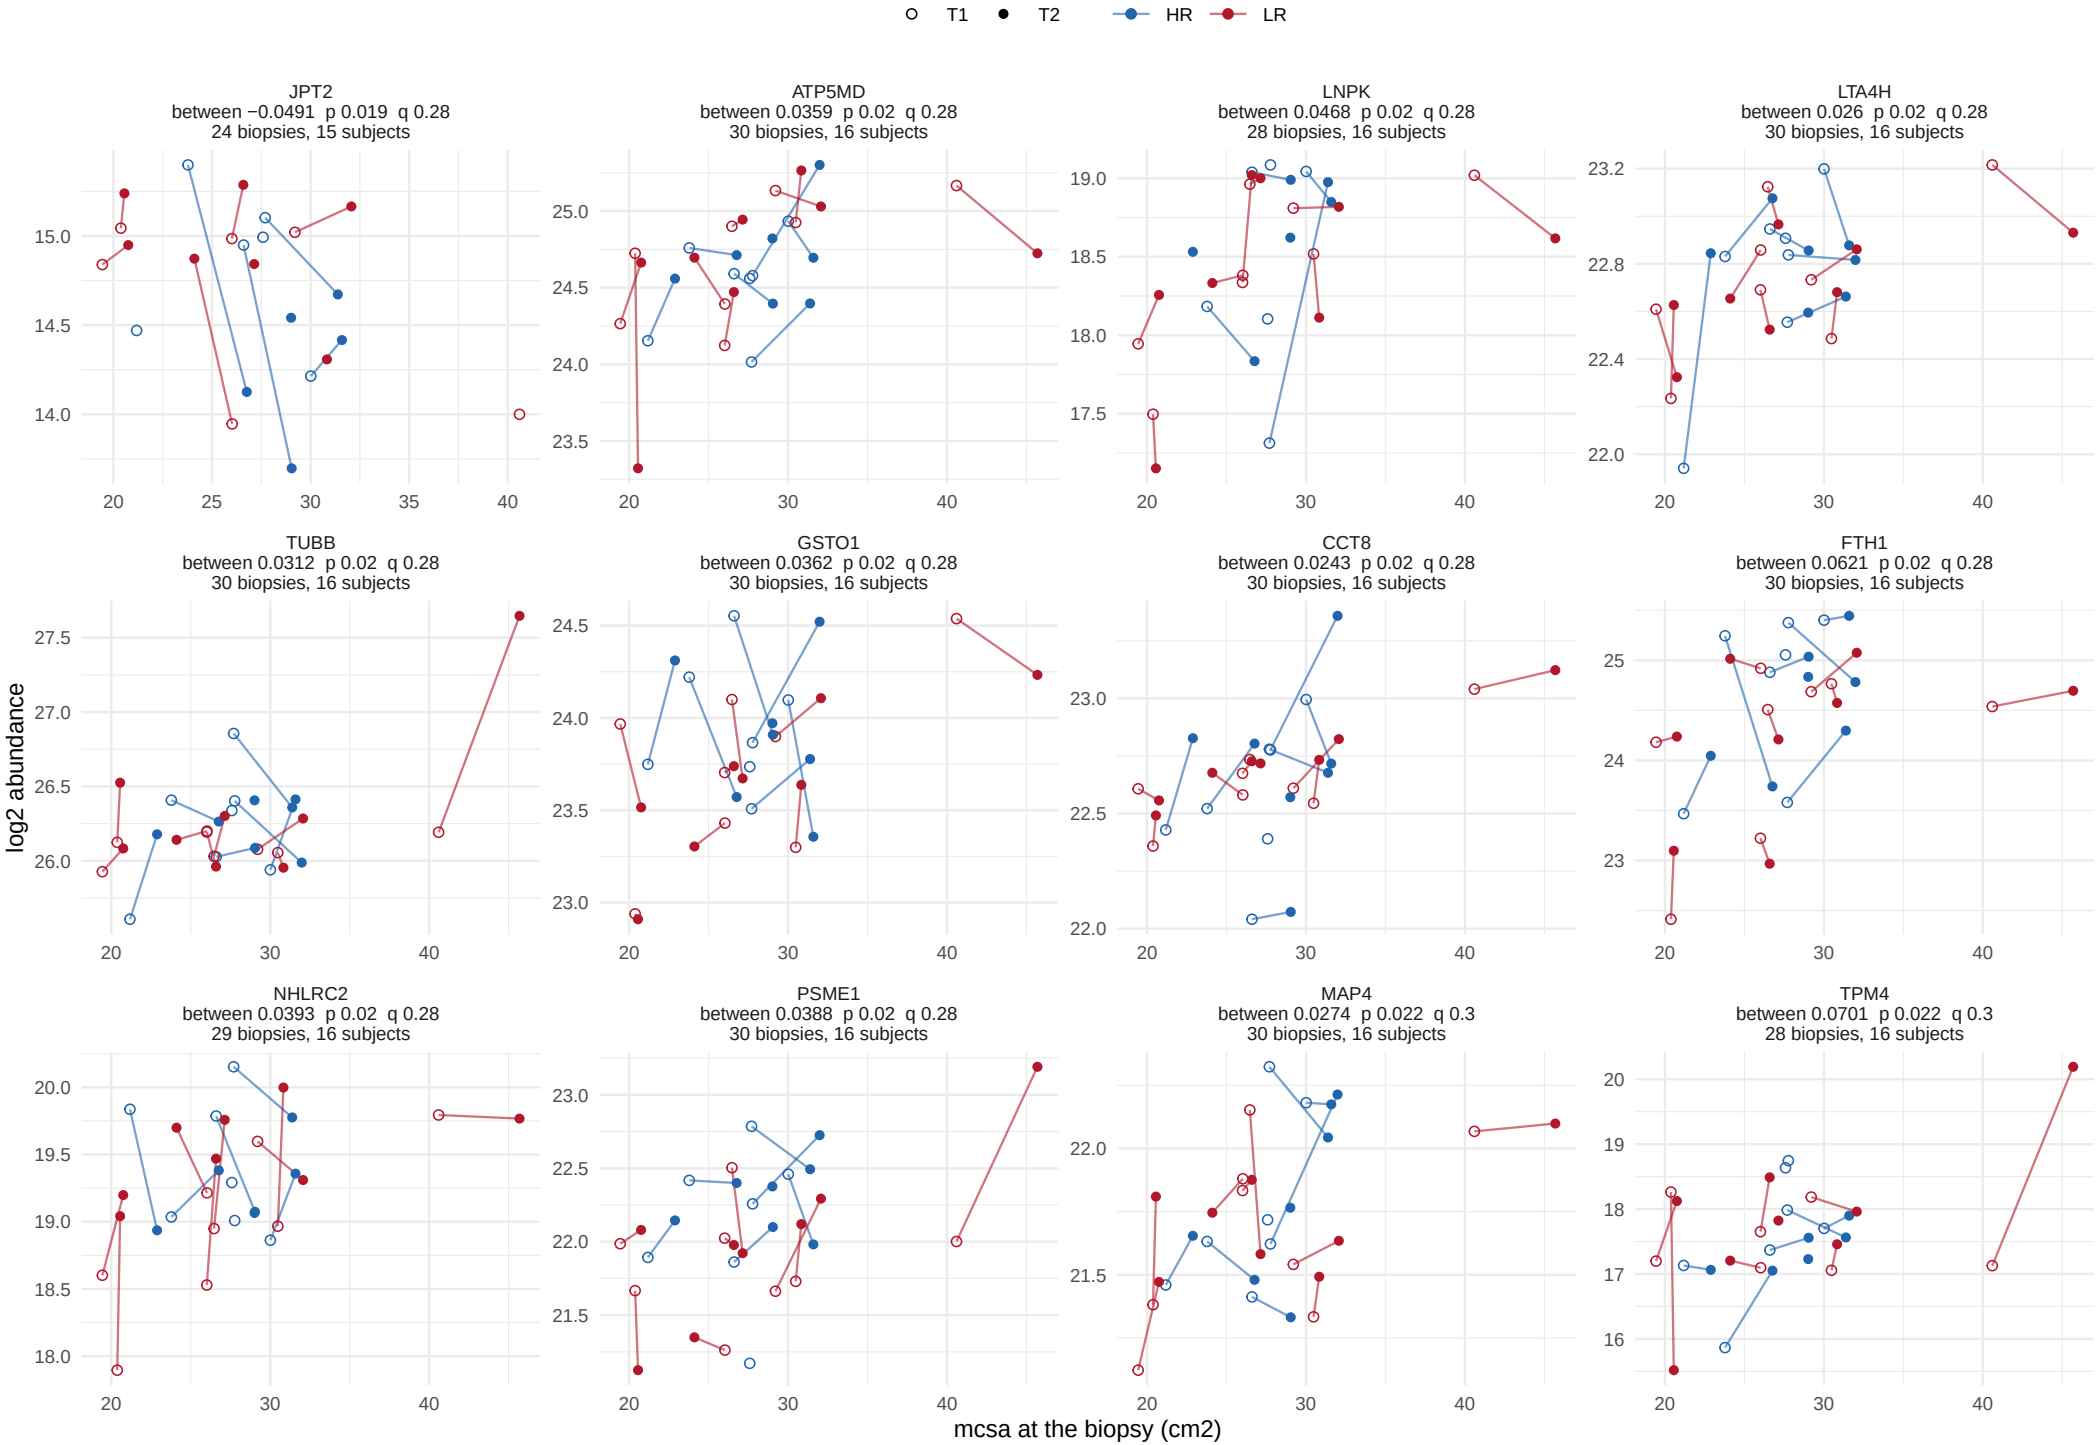

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

mcsa, between−person term


216 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 11 of 18.

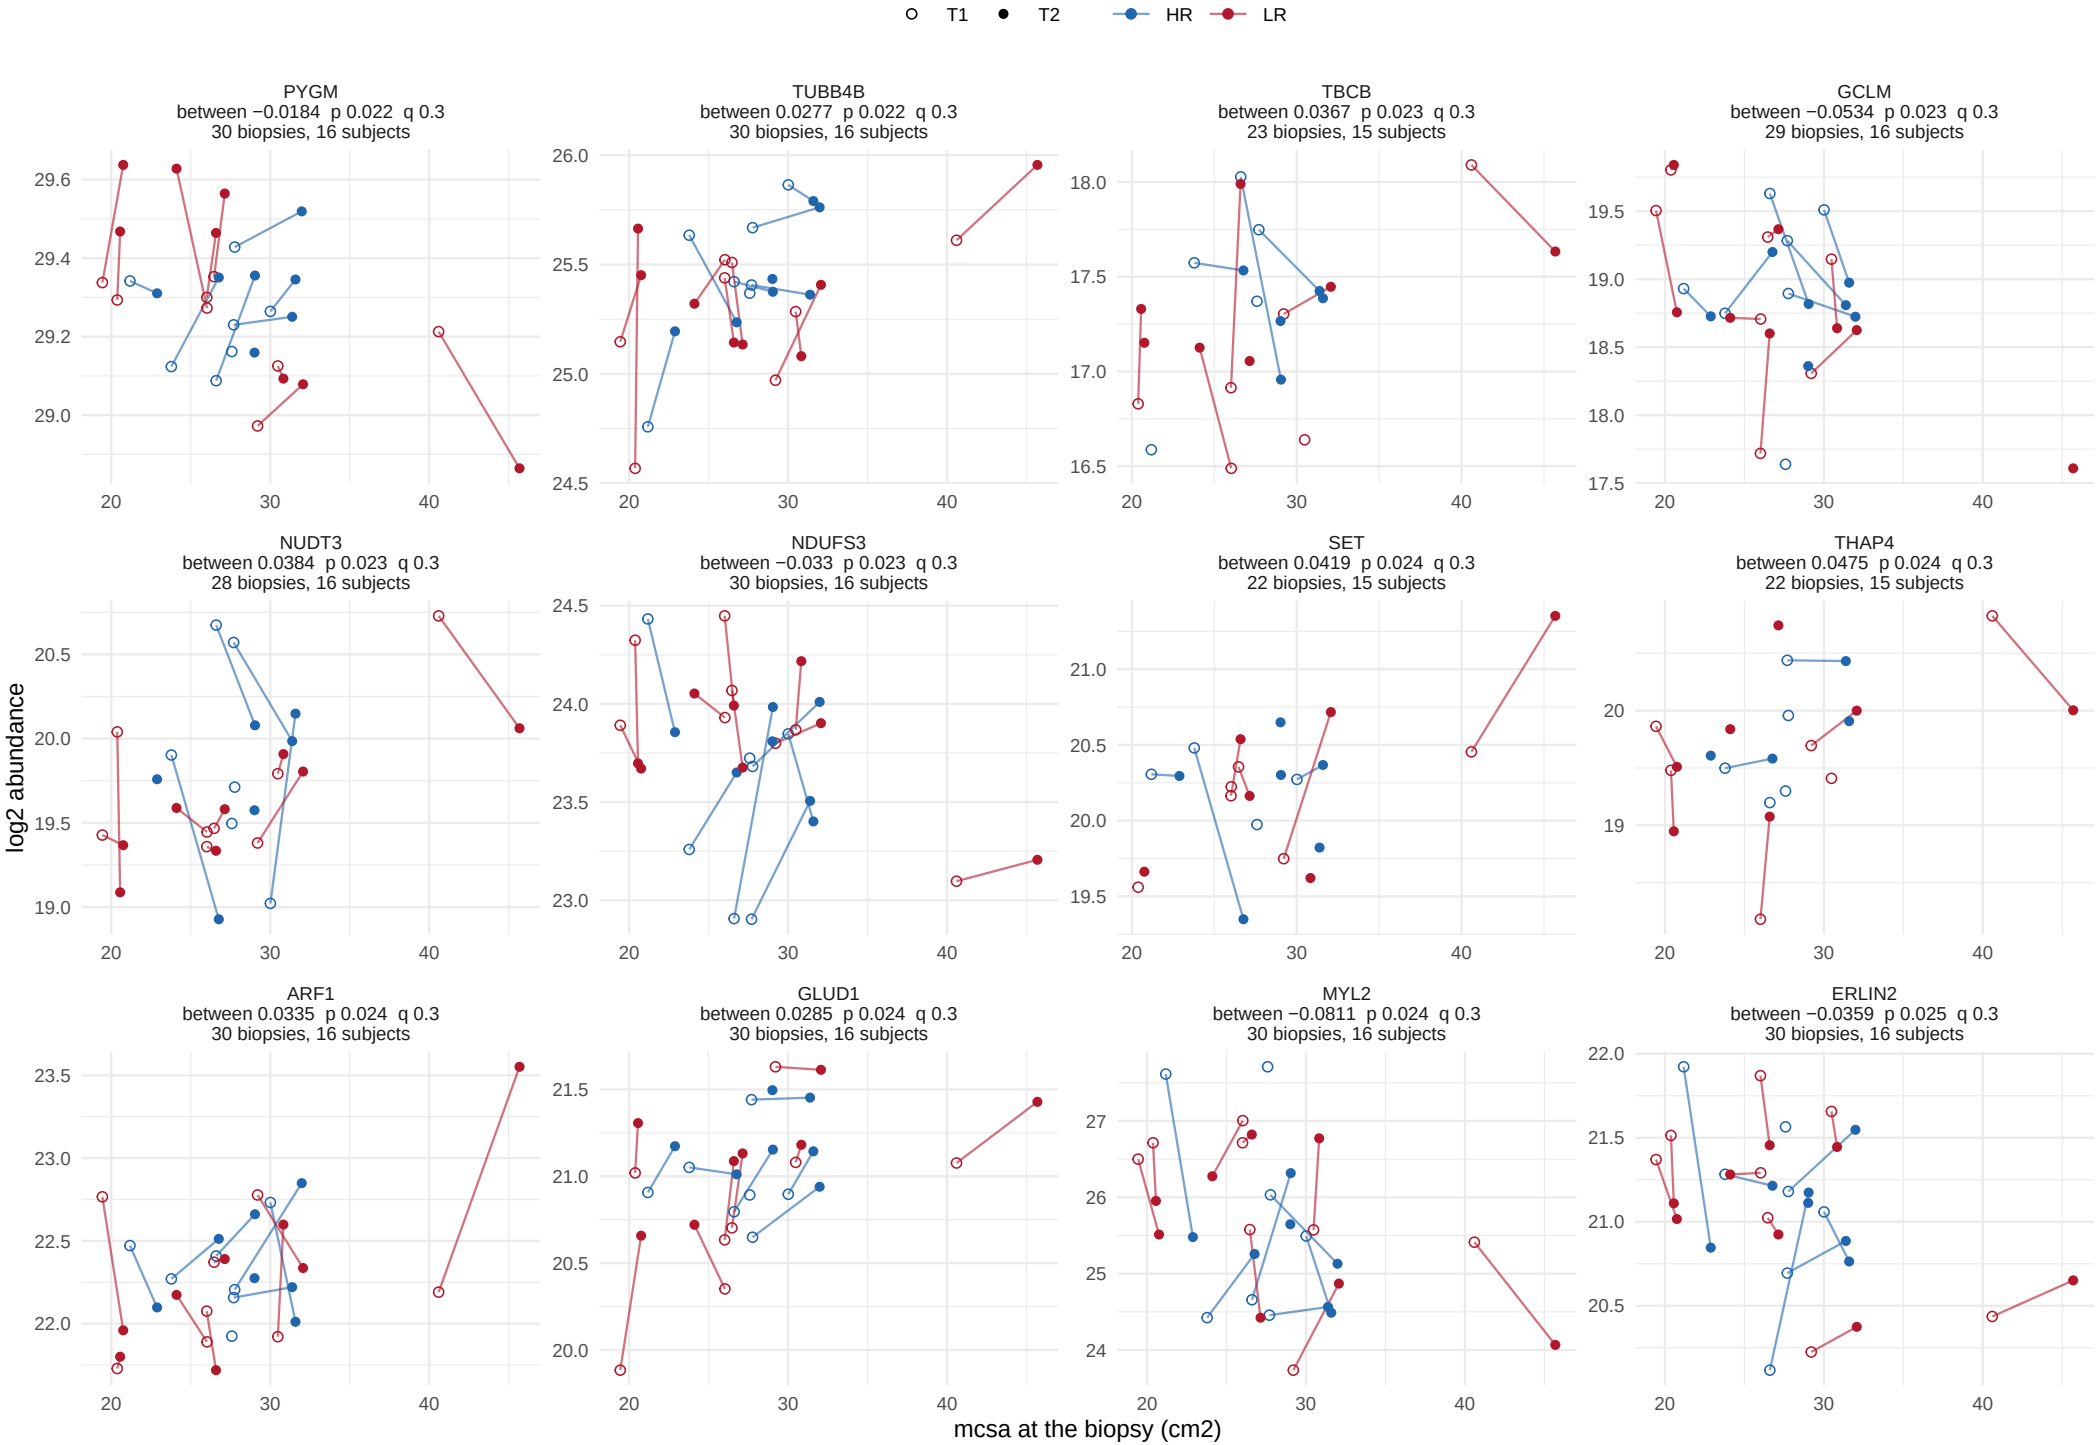

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

mcsa, between−person term


216 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 12 of 18.

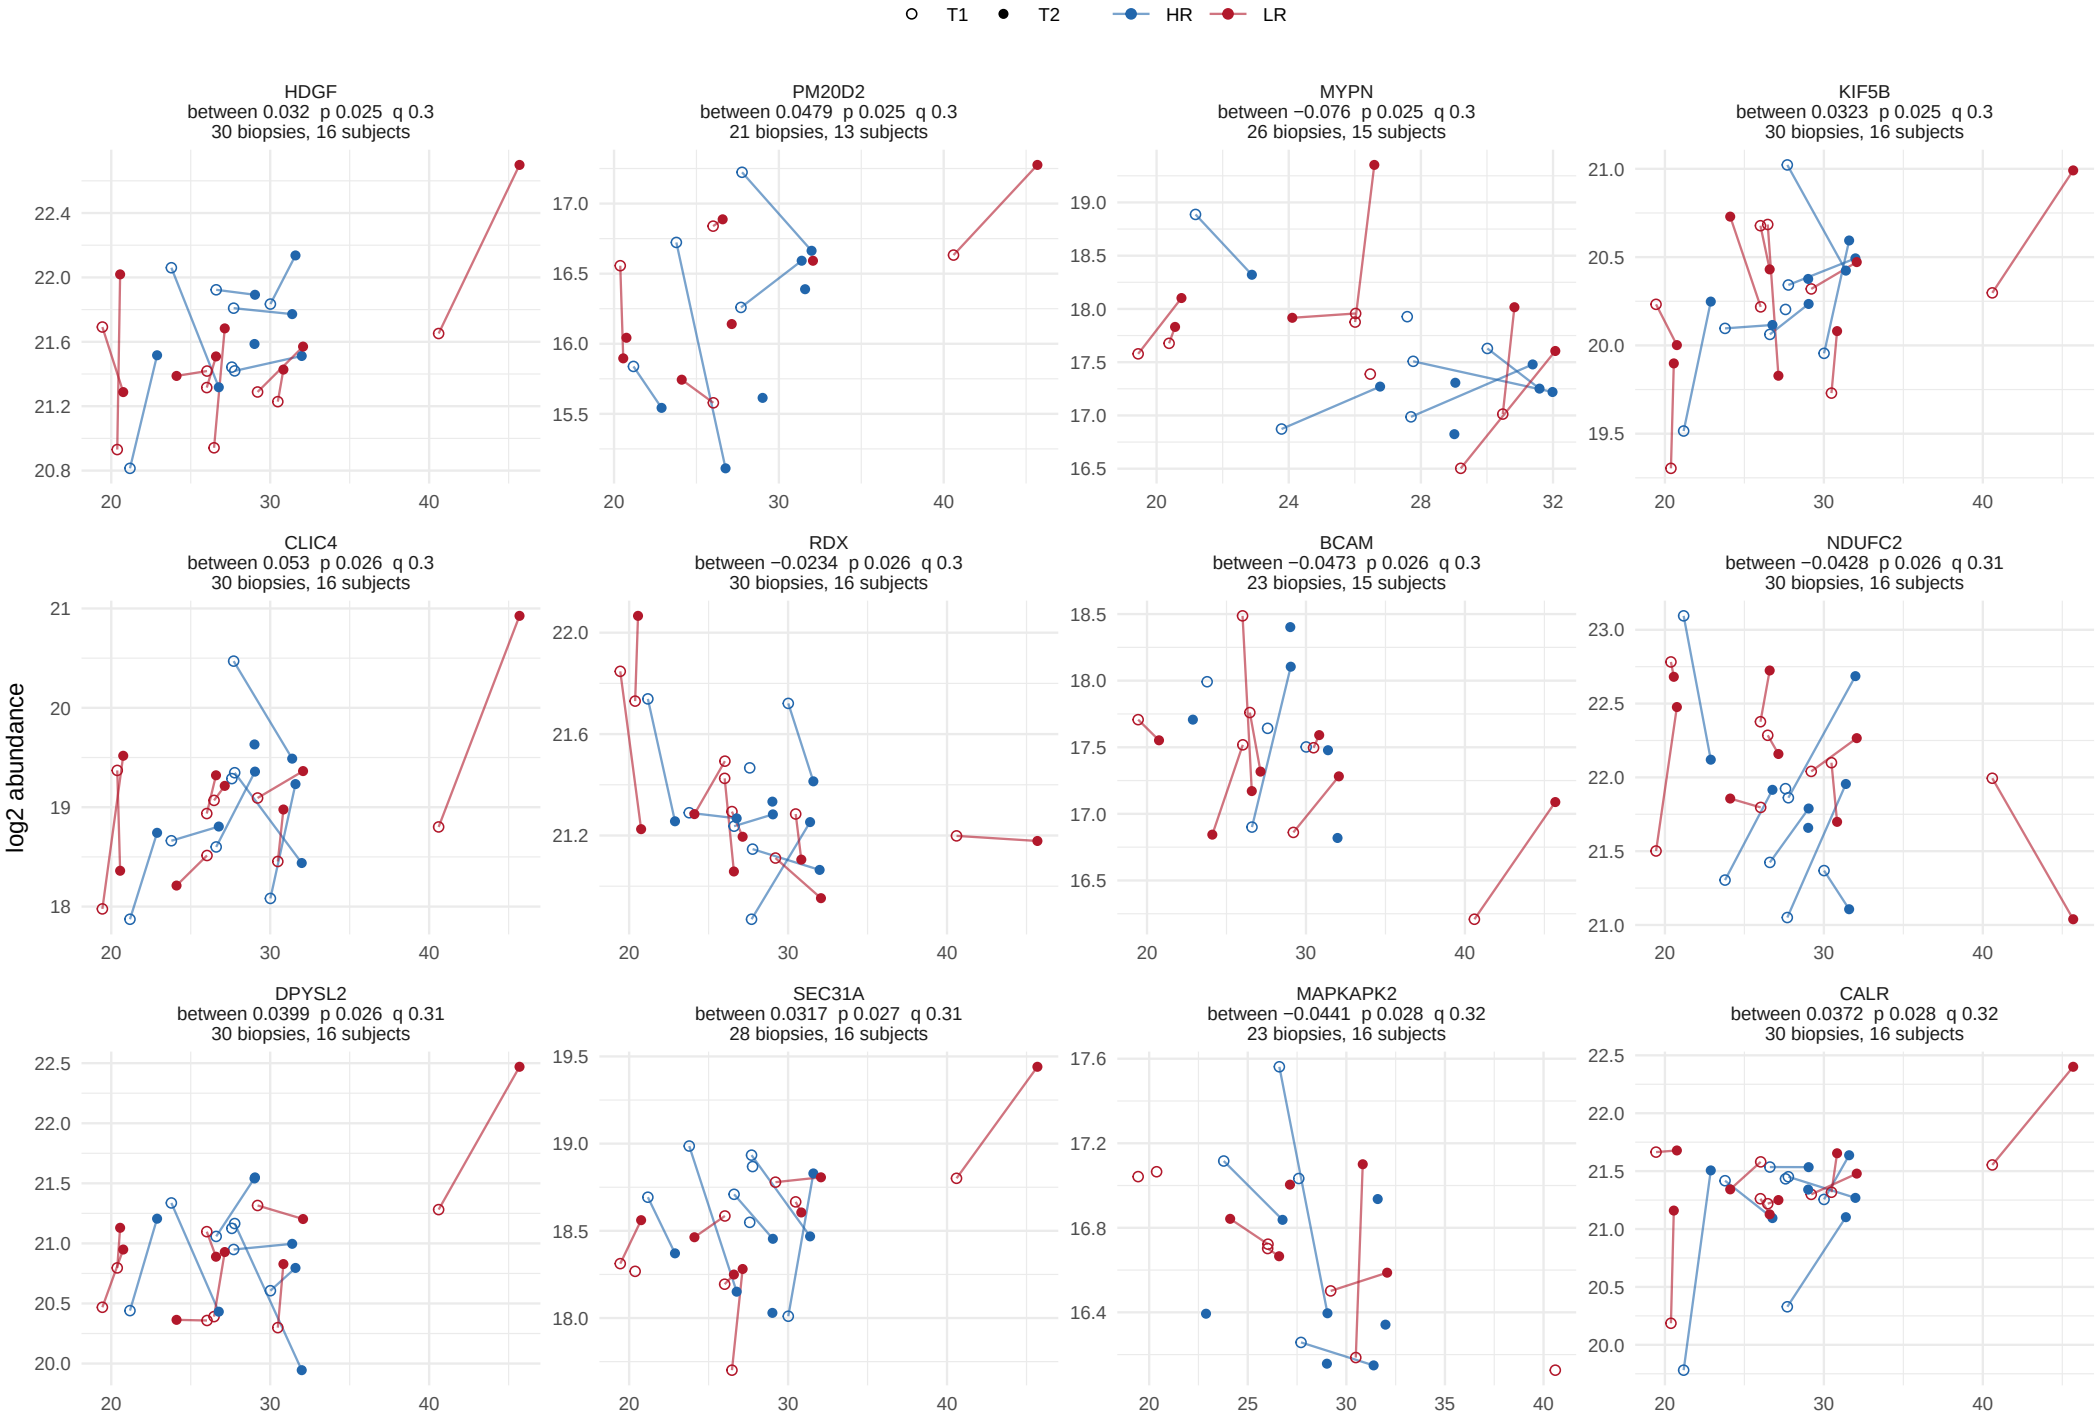

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

mcsa, between−person term


216 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 13 of 18.

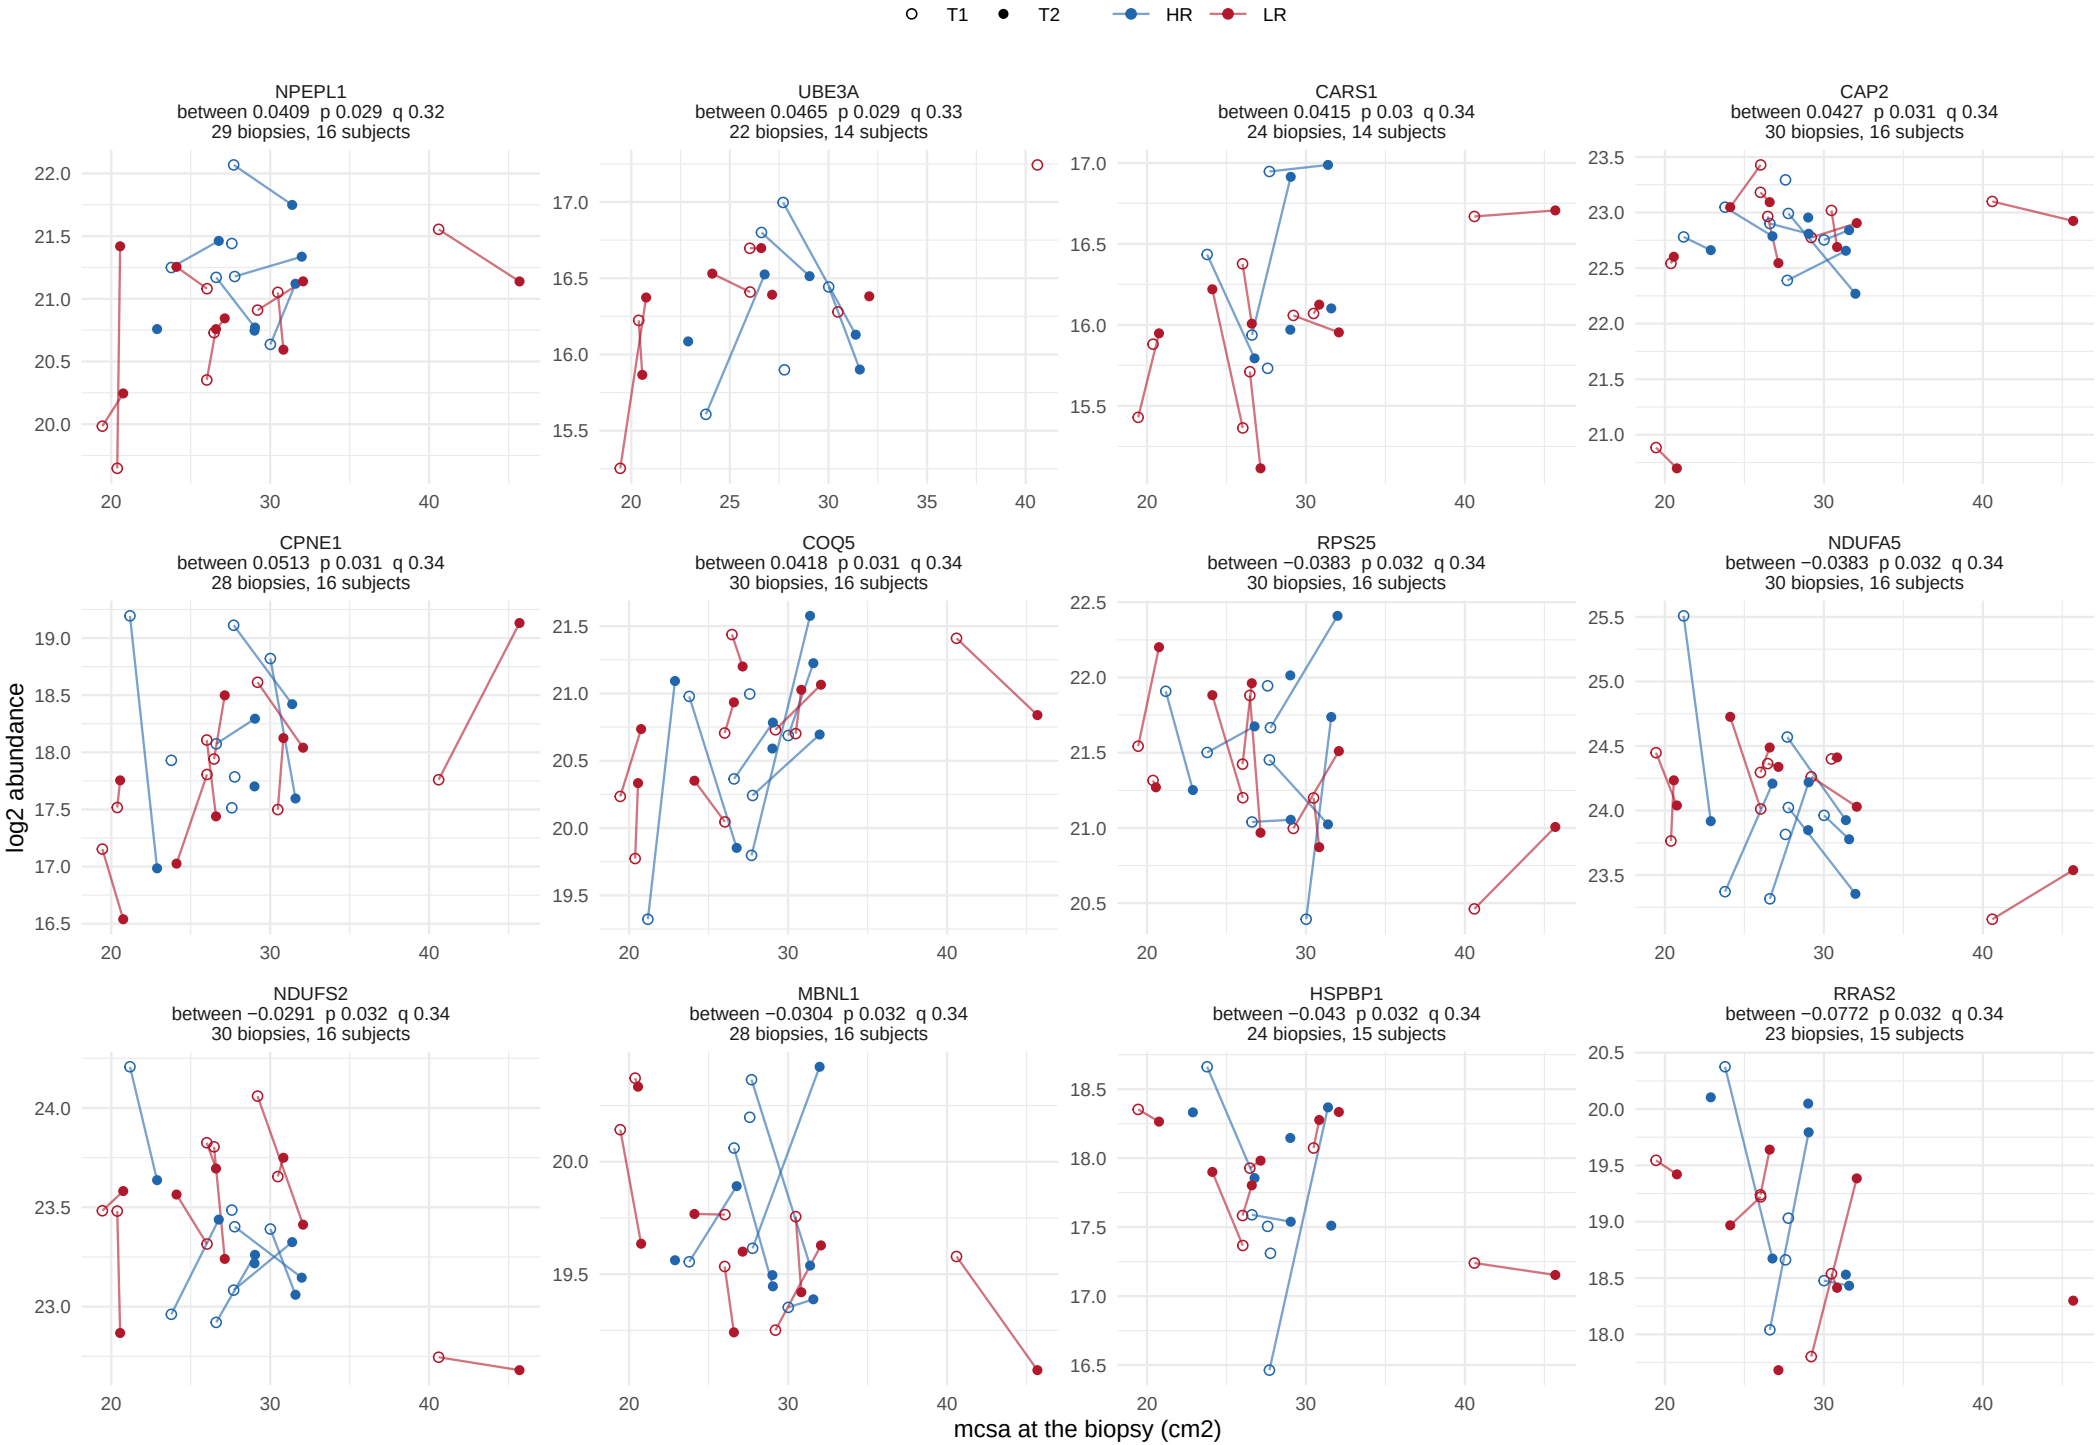

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

mcsa, between−person term


216 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 14 of 18.

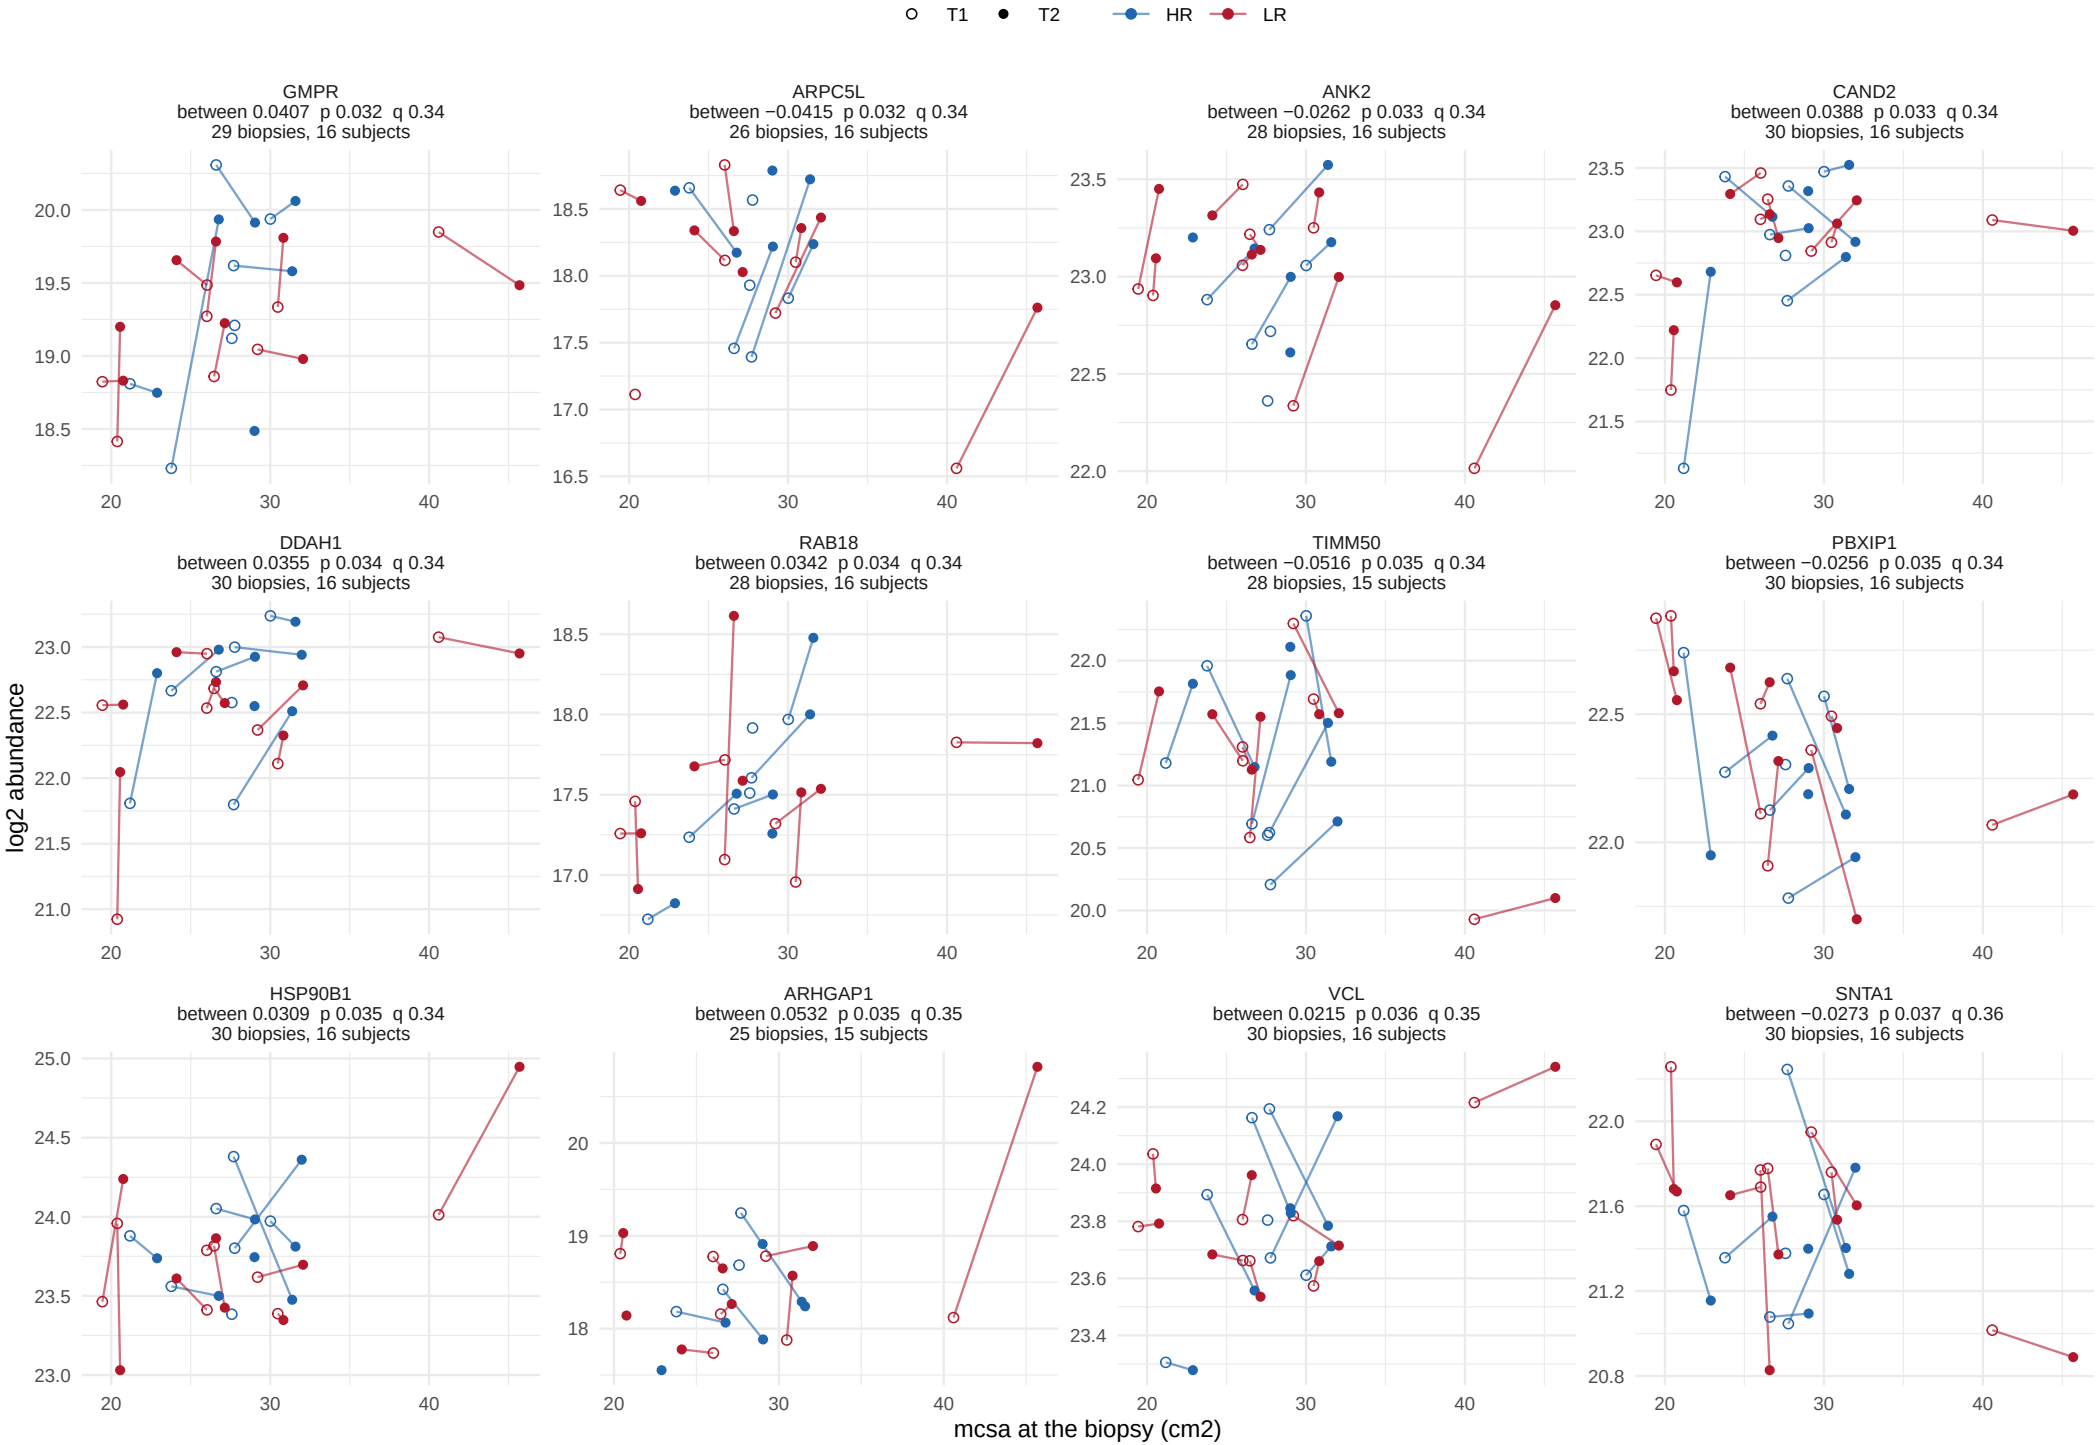

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

mcsa, between−person term


216 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 15 of 18.

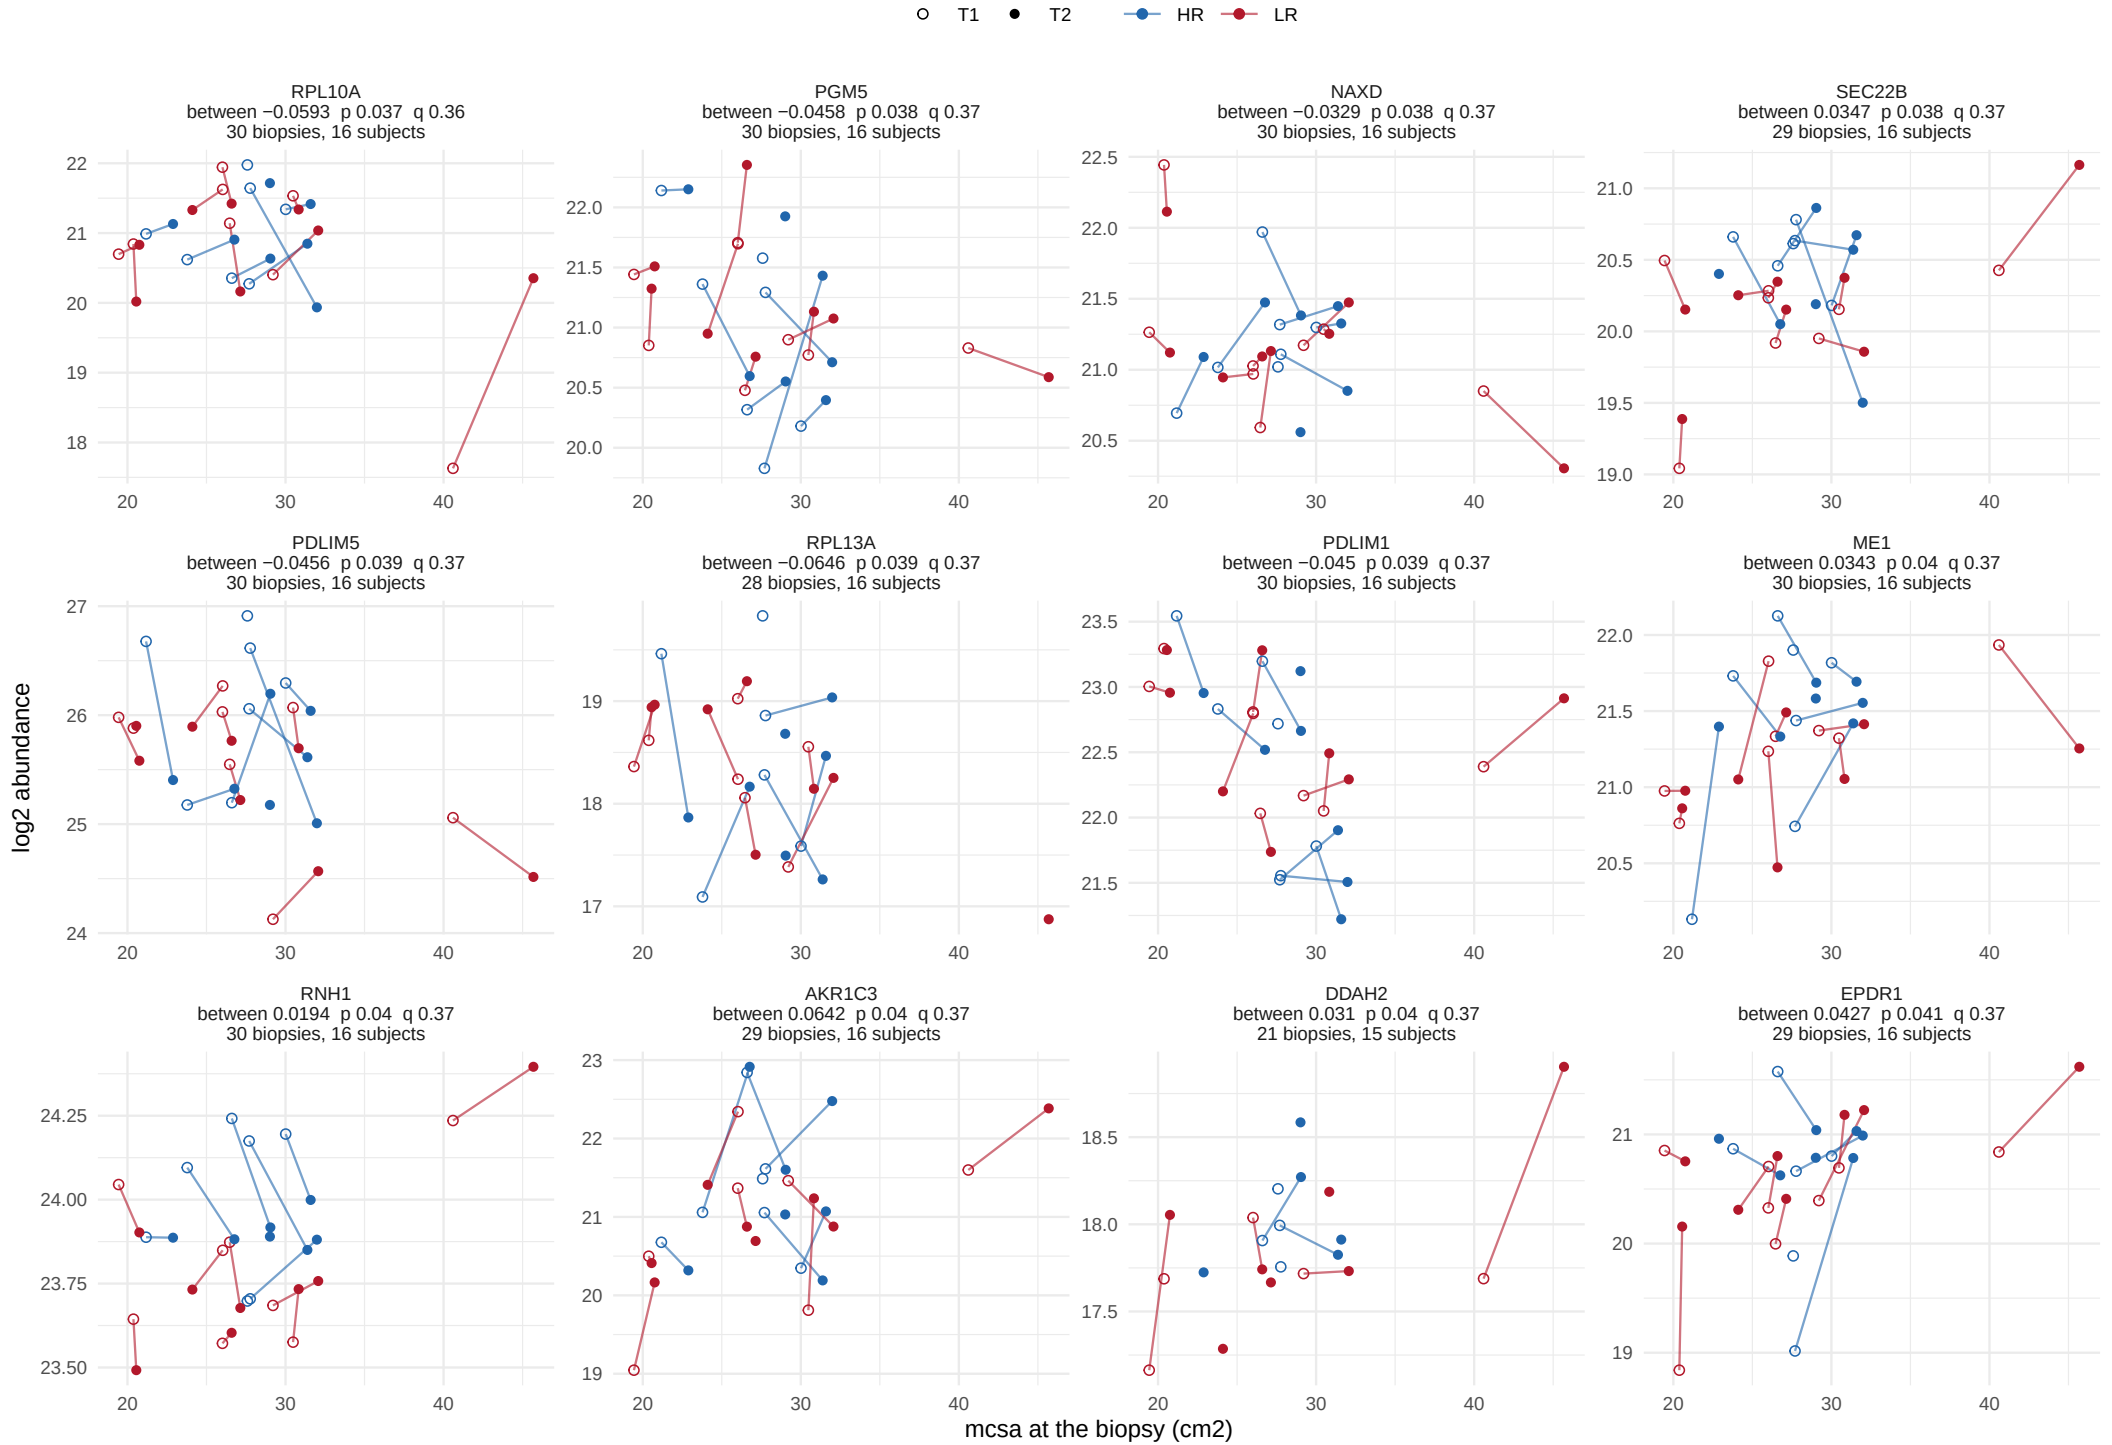

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

mcsa, between−person term


216 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 16 of 18.

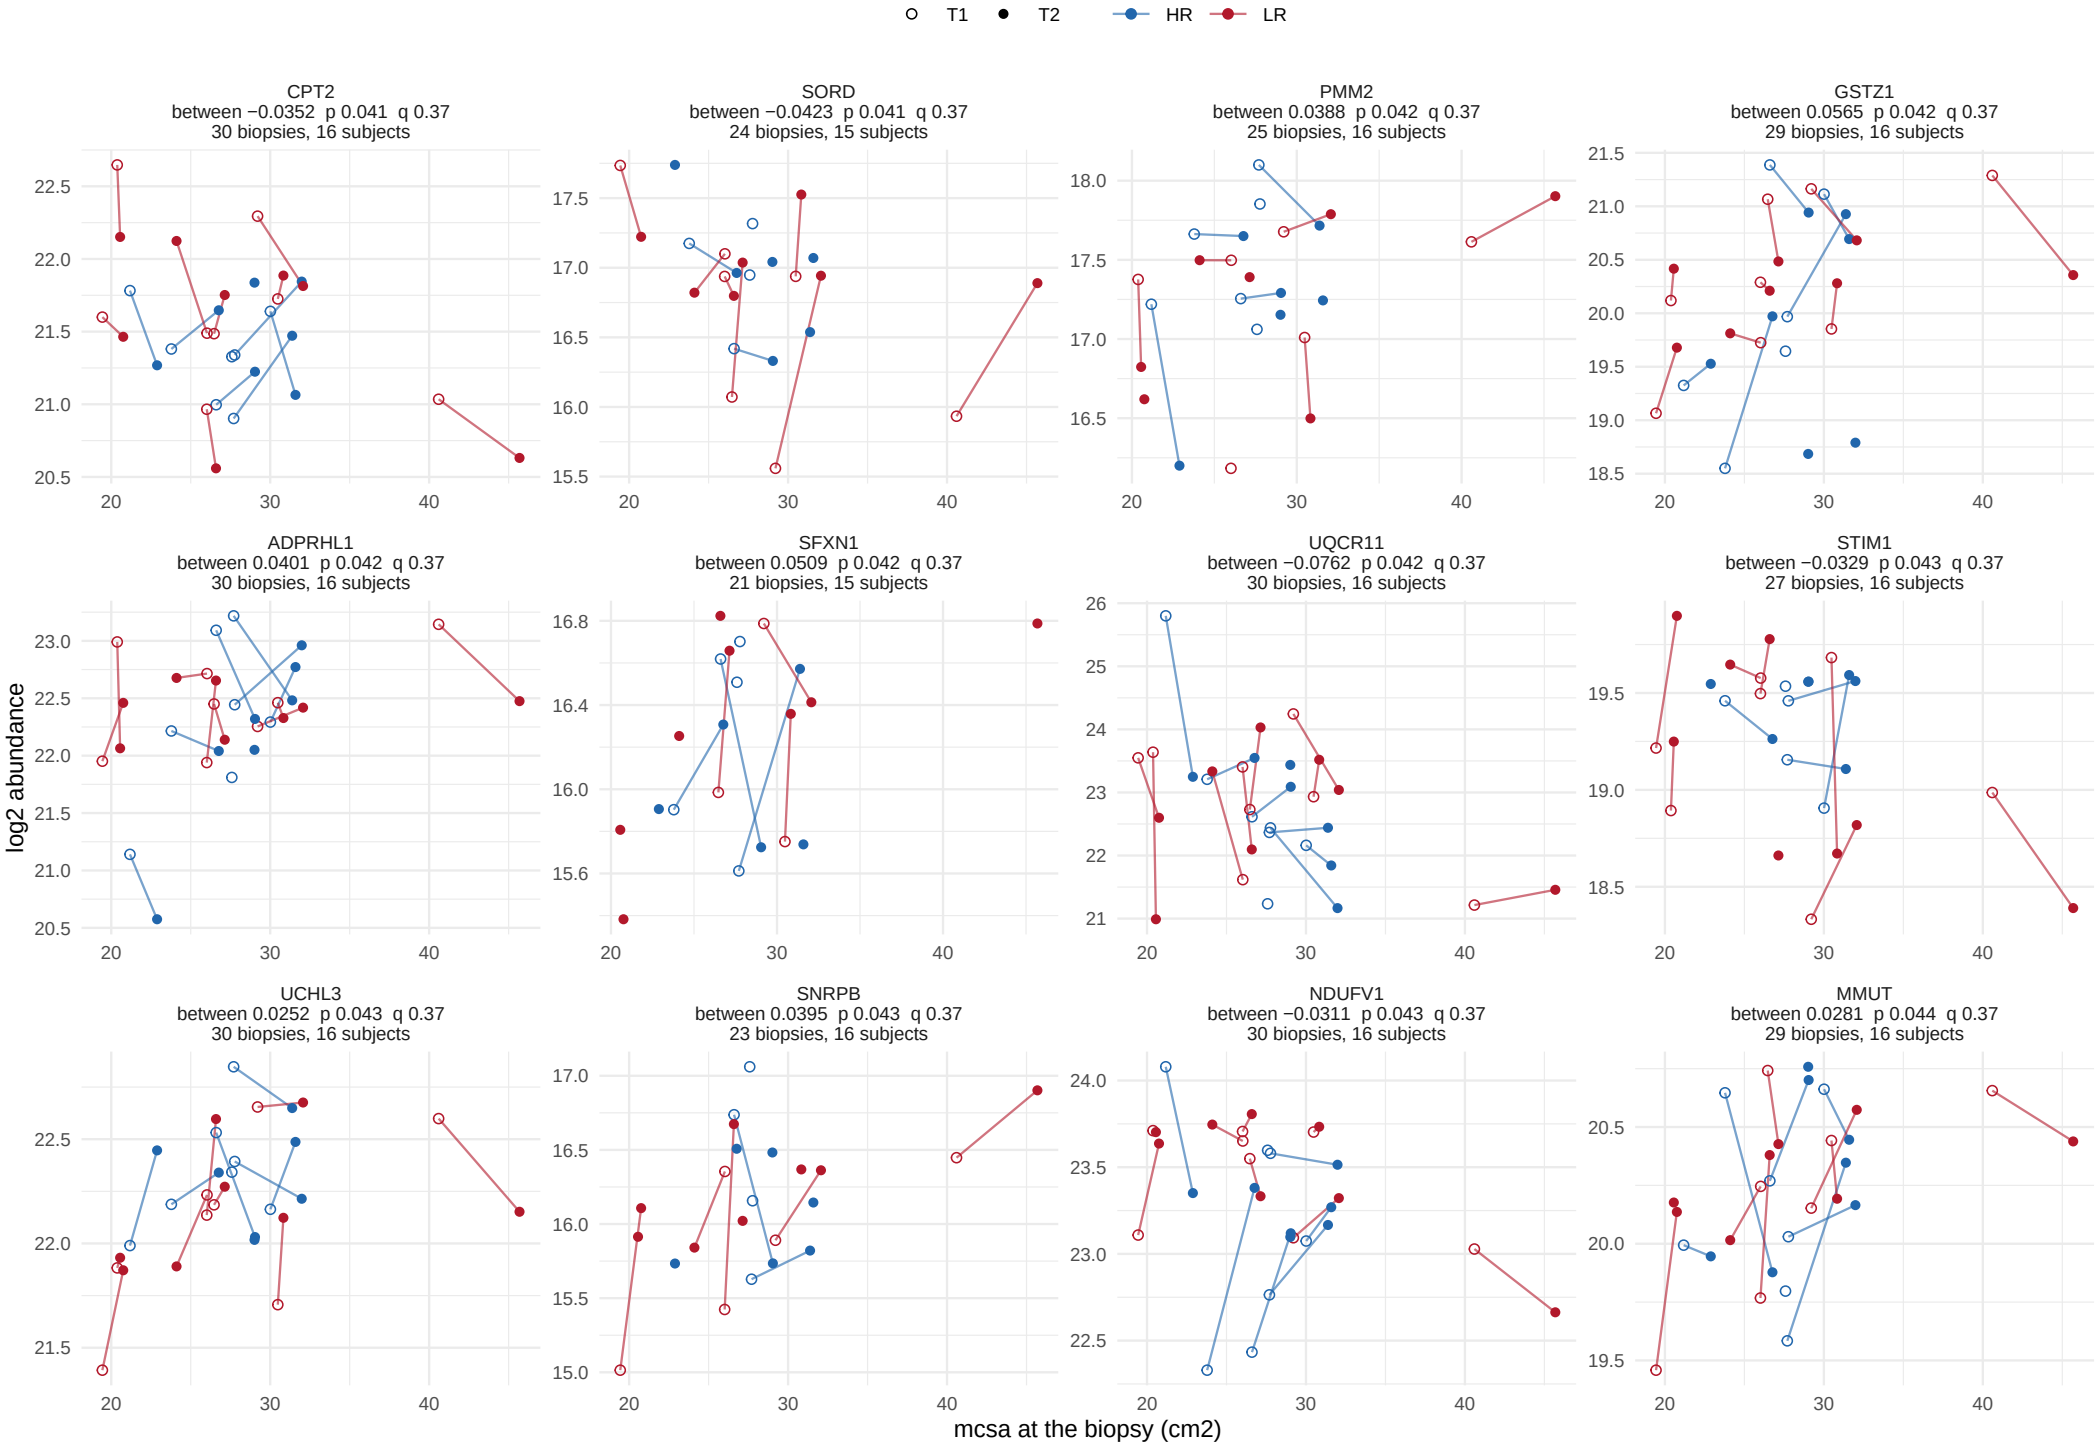

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

mcsa, between−person term


216 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 17 of 18.

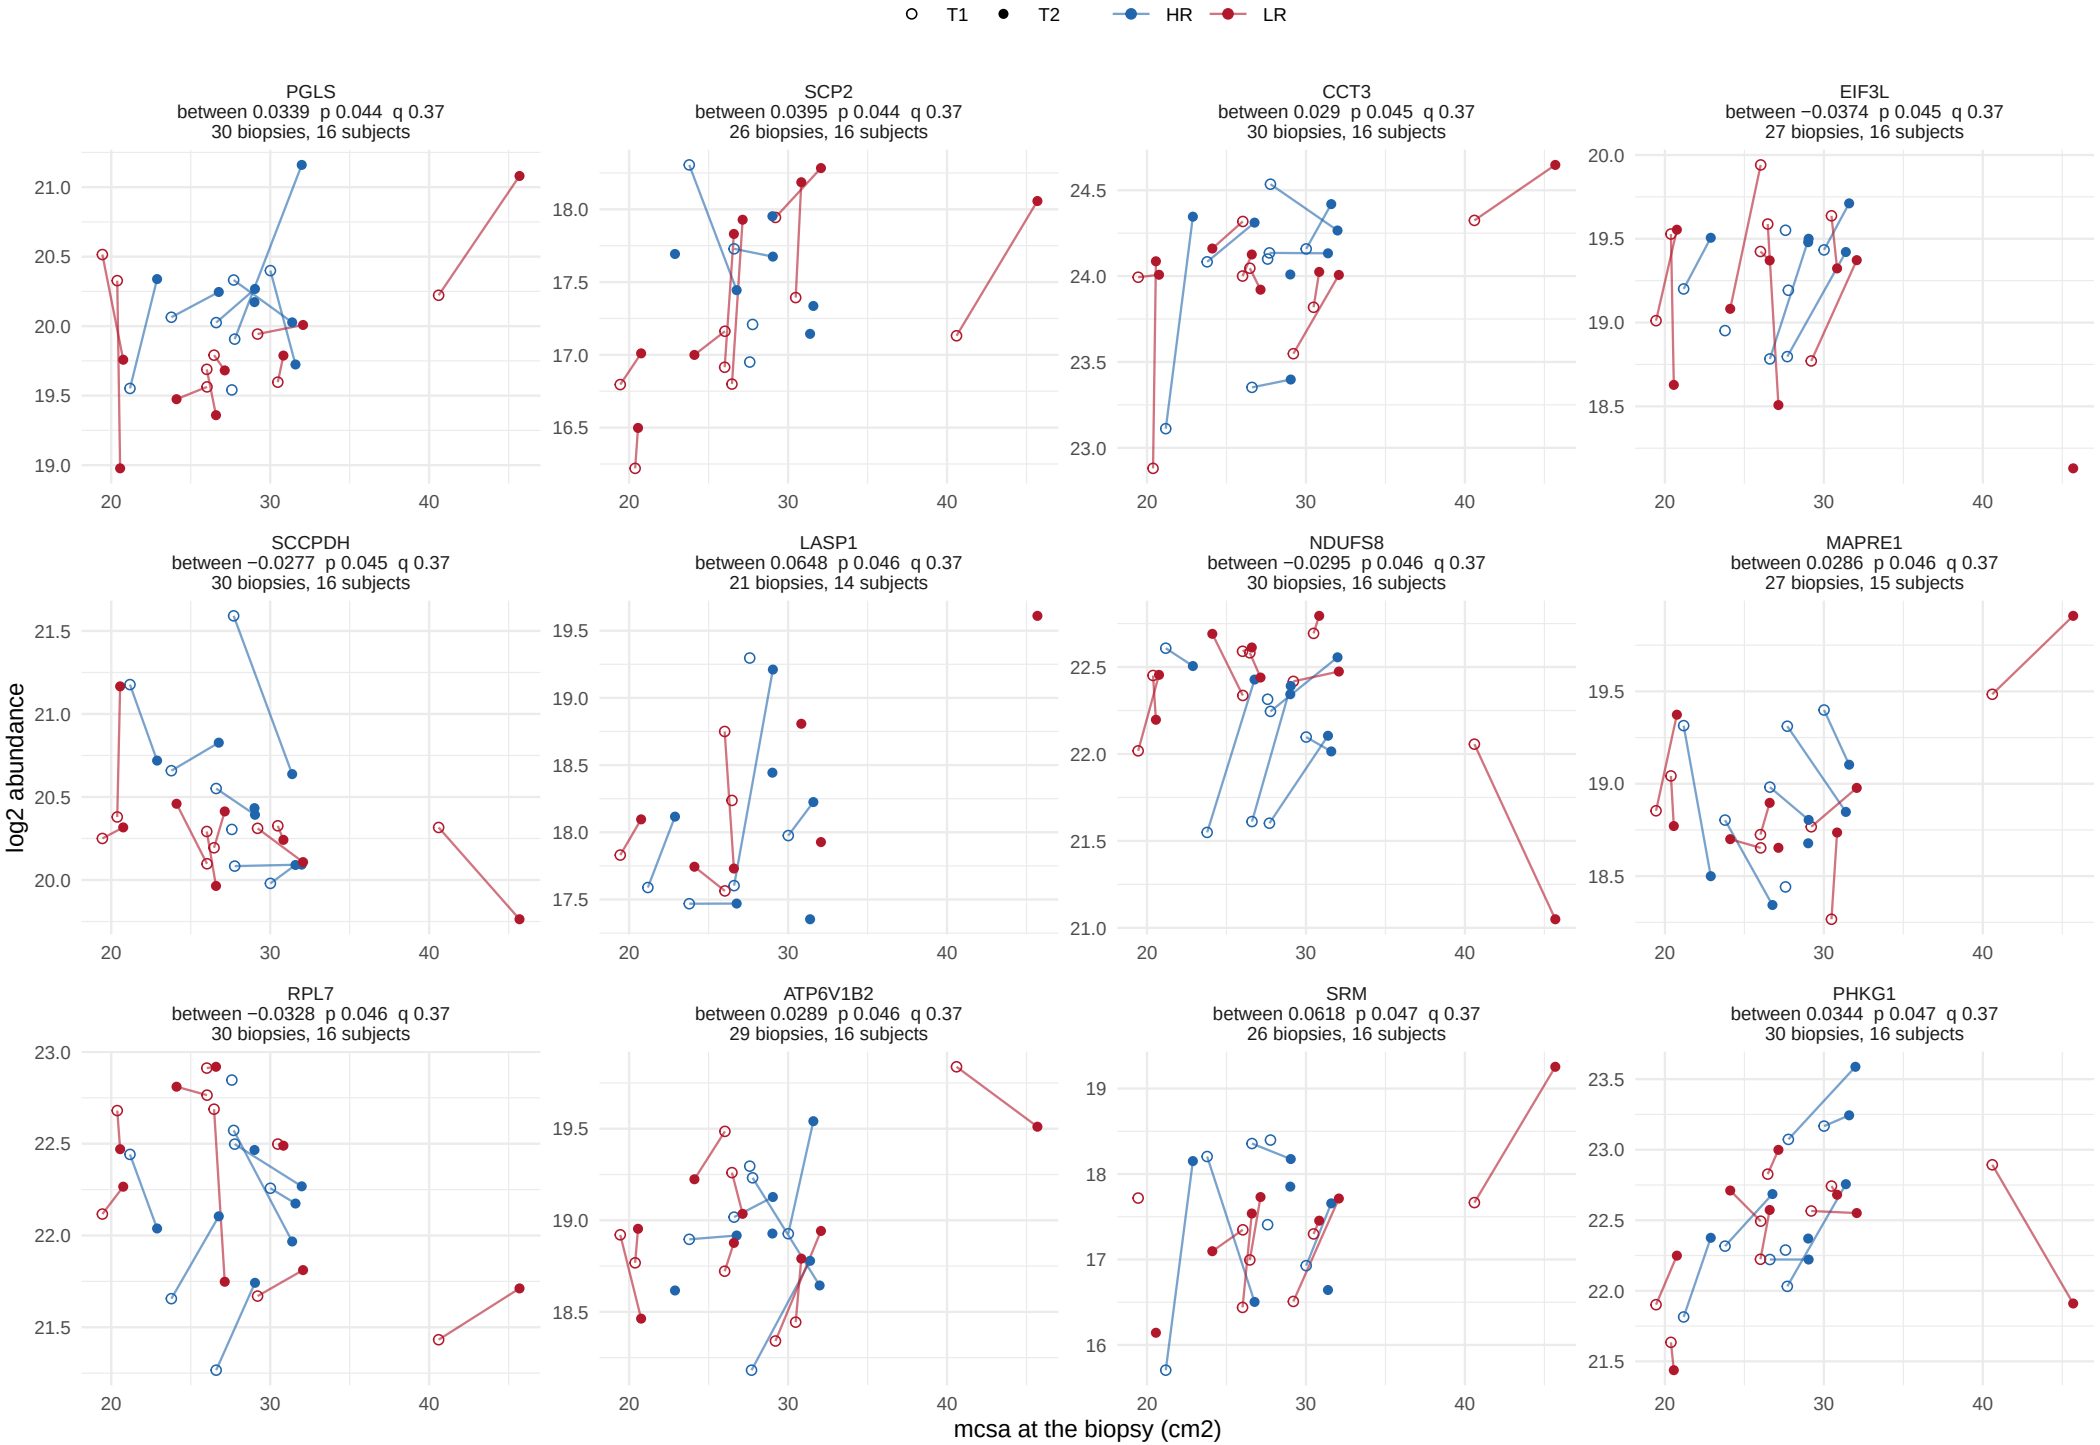

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

mcsa, between−person term


216 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 18 of 18.

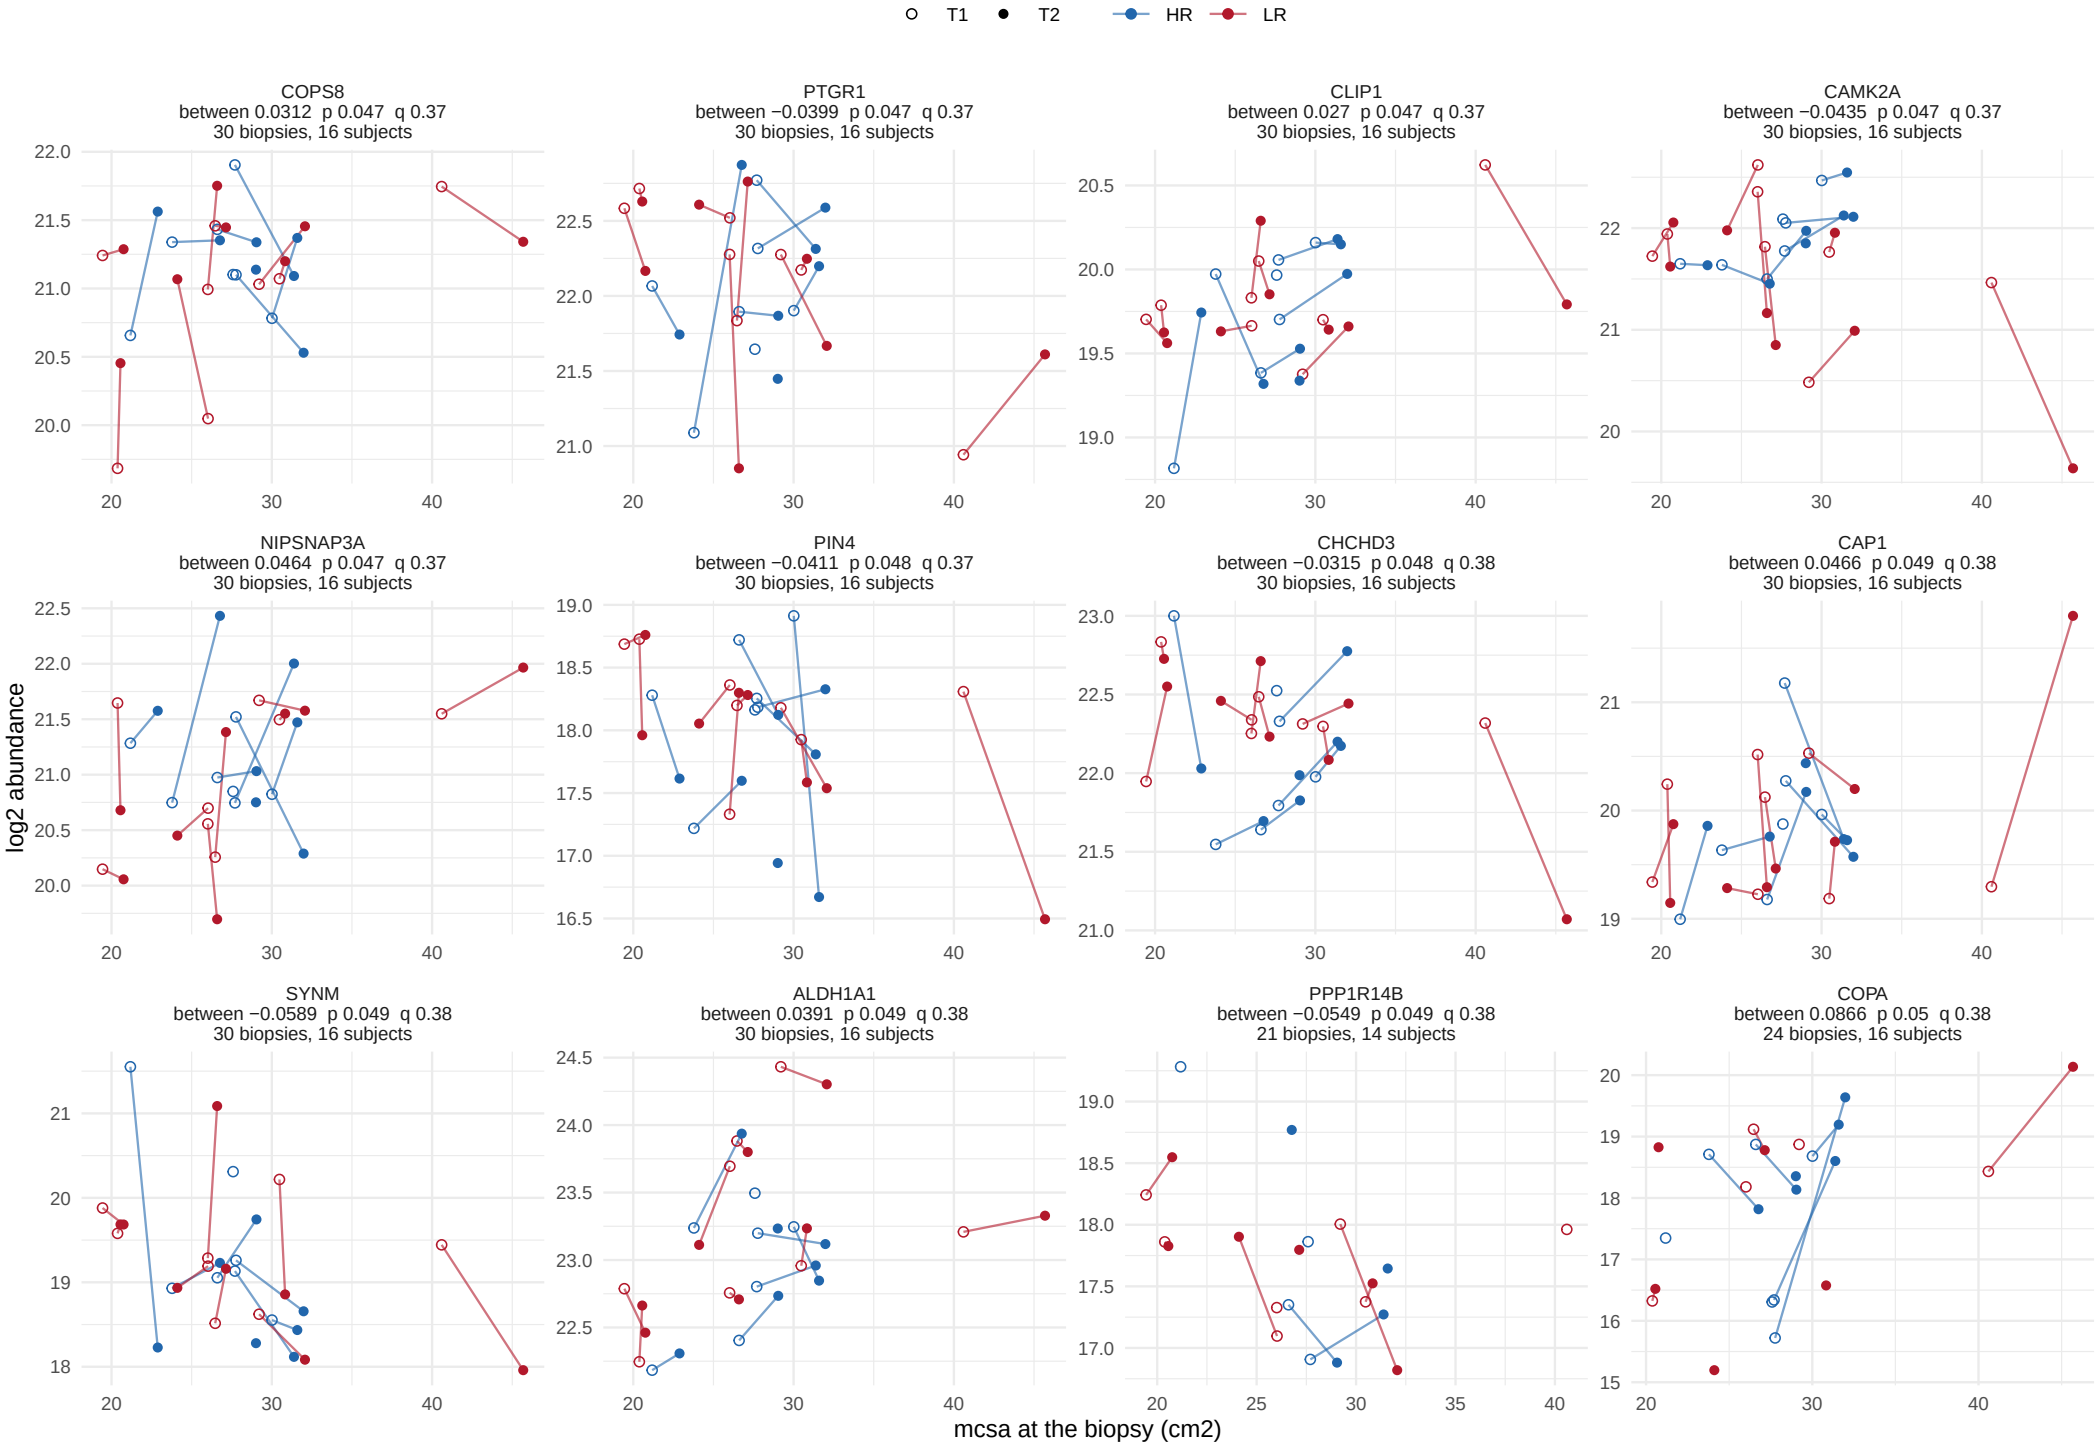

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_press_1rm, within−person term


88 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 1 of 8.

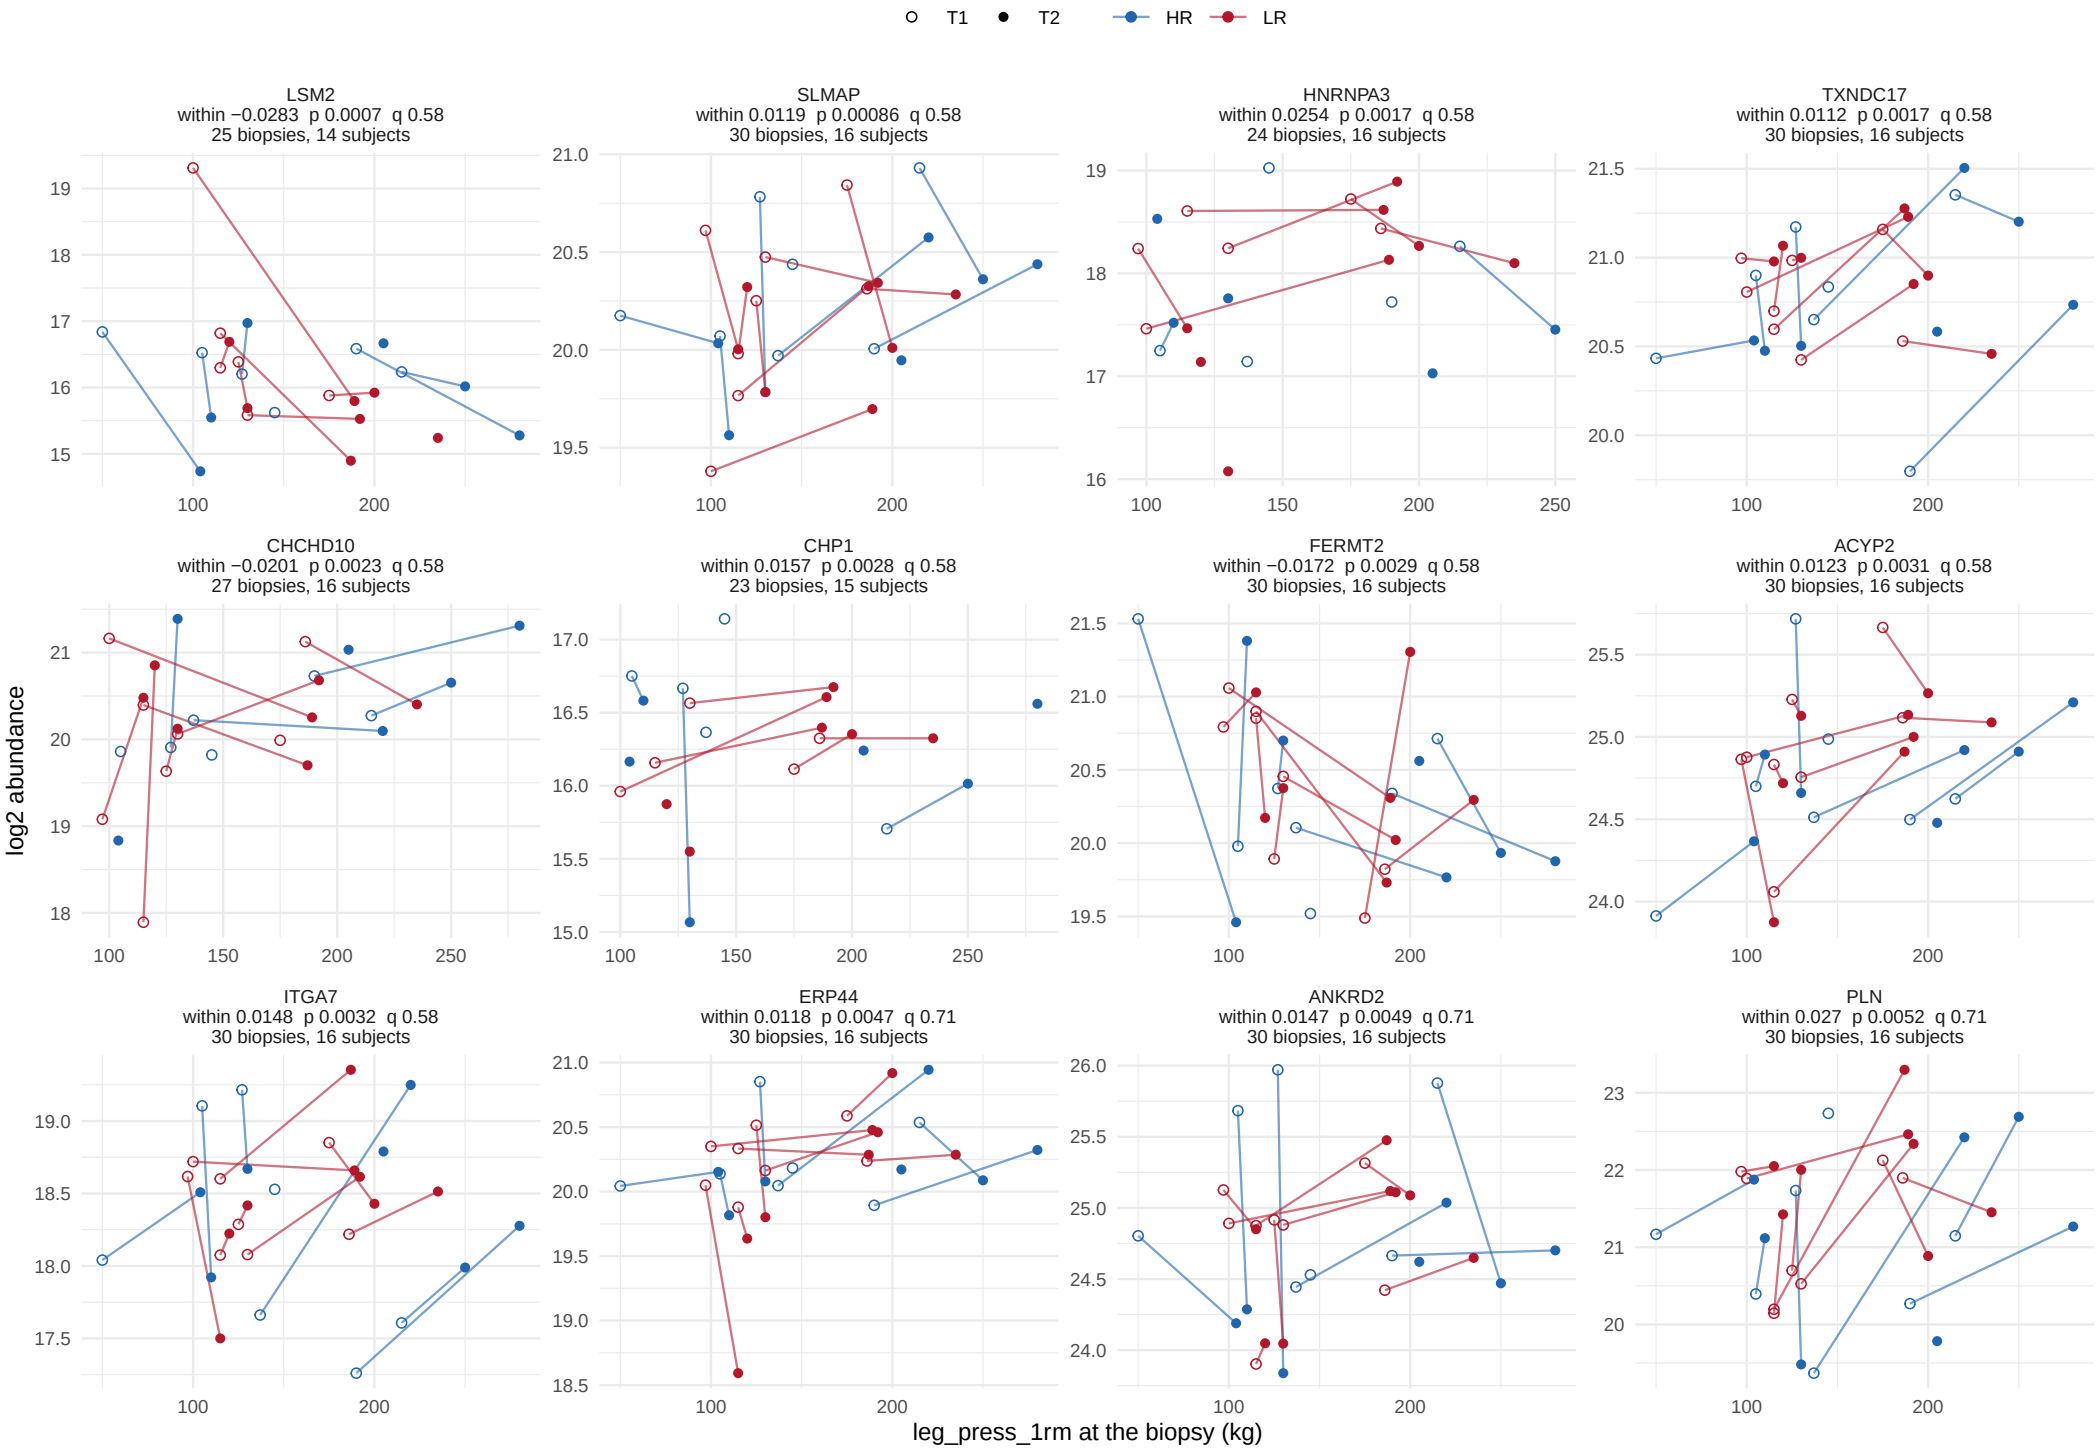

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_press_1rm, within−person term


88 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 2 of 8.

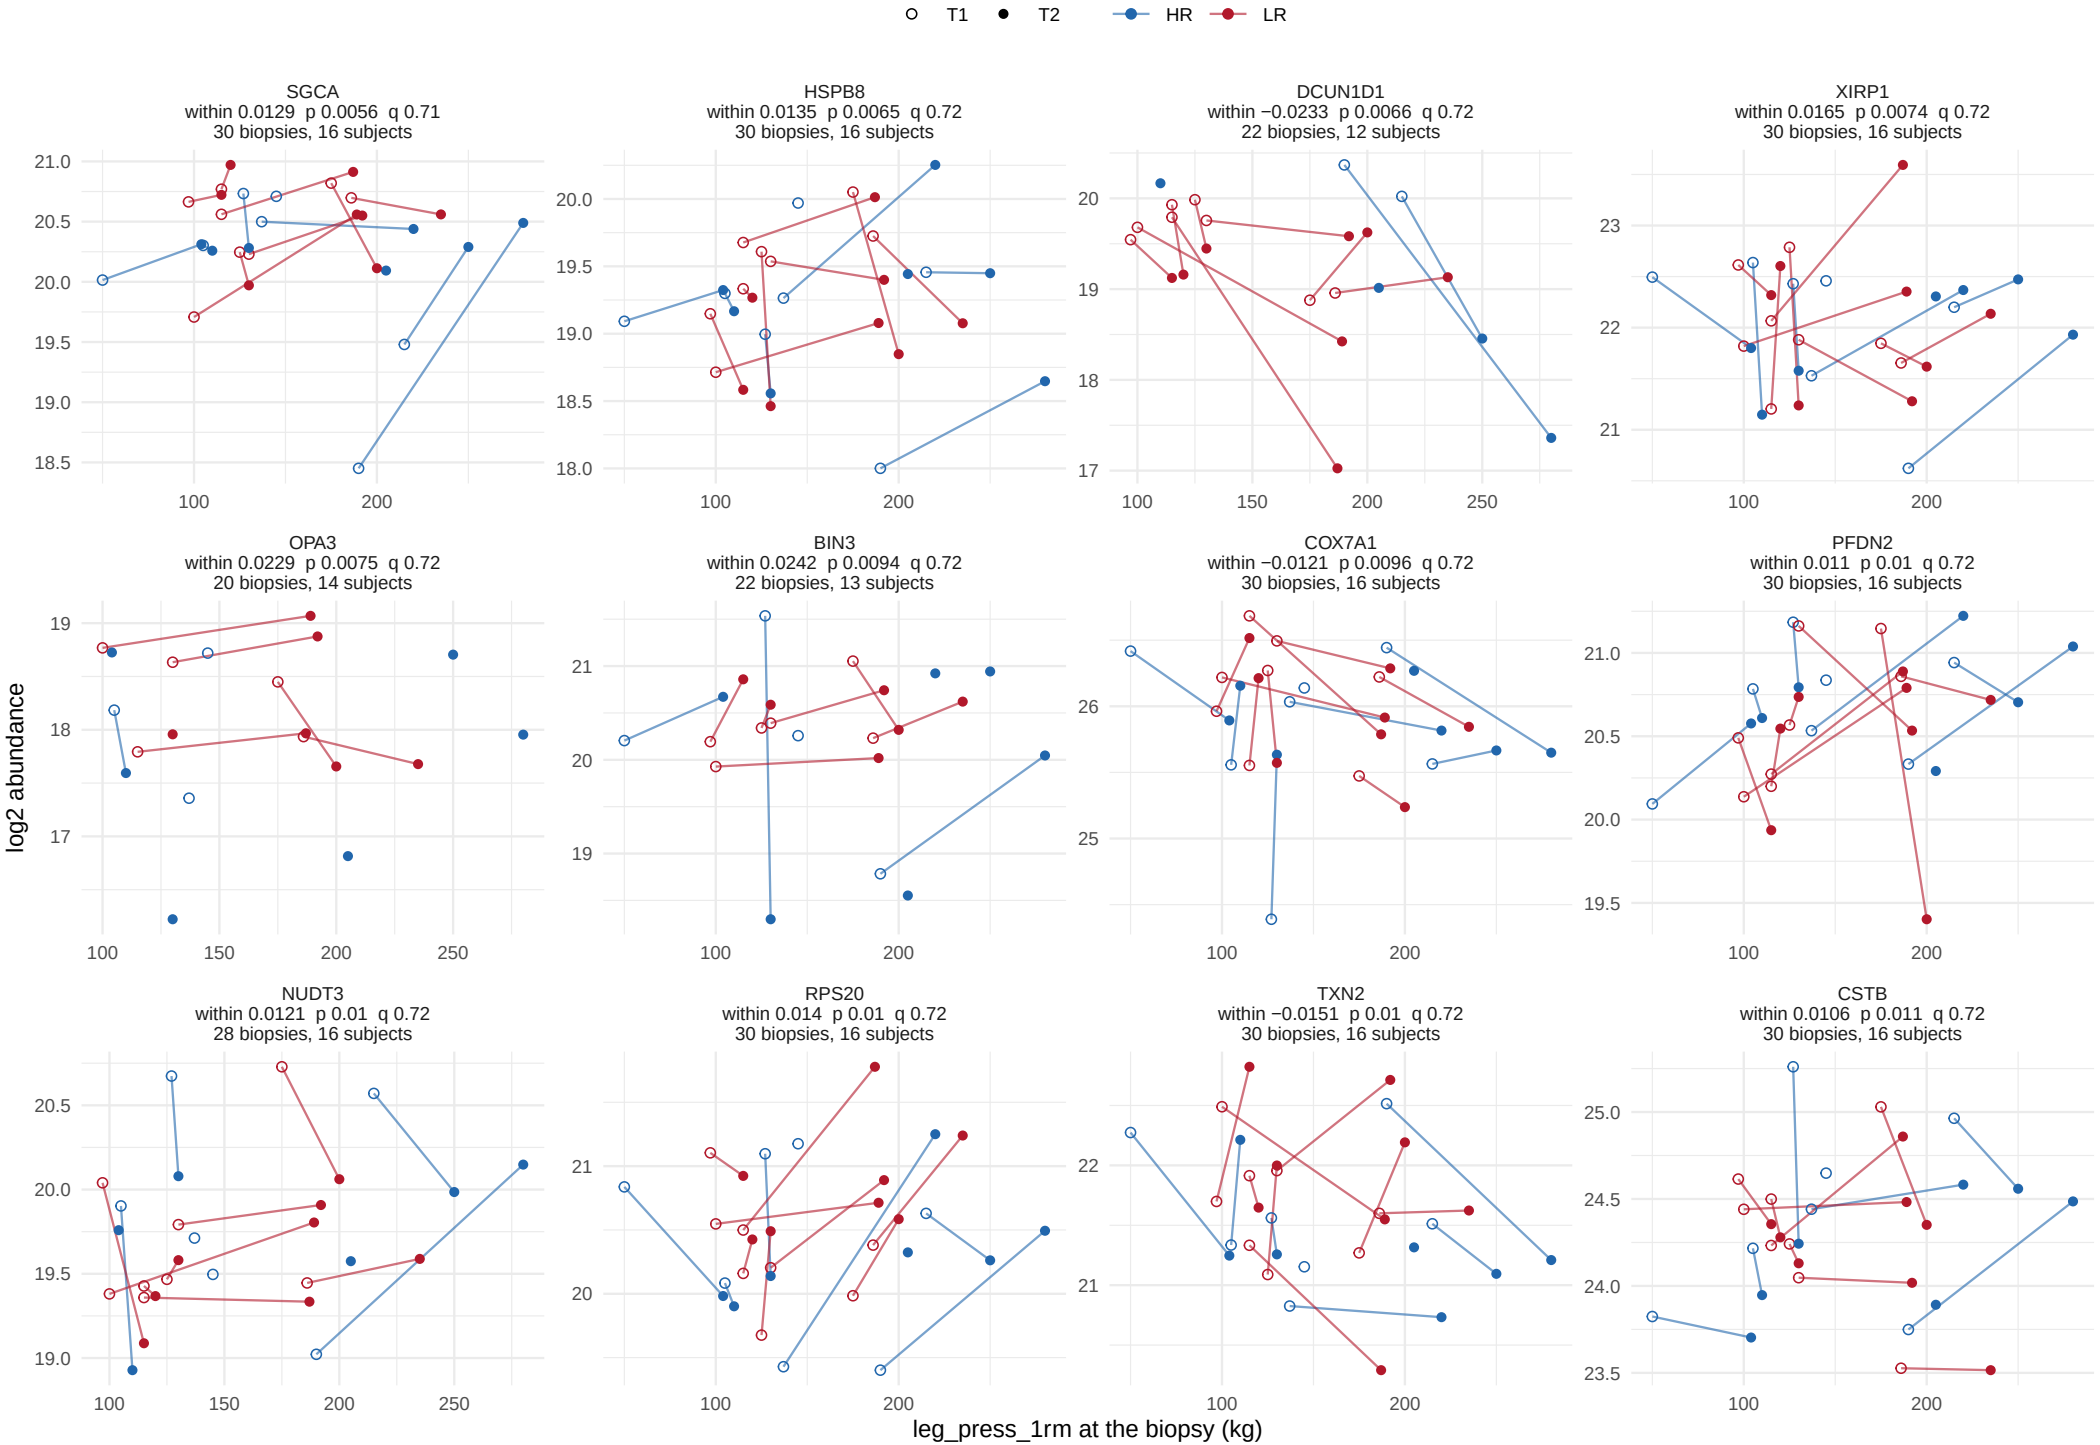

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_press_1rm, within−person term


88 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 3 of 8.

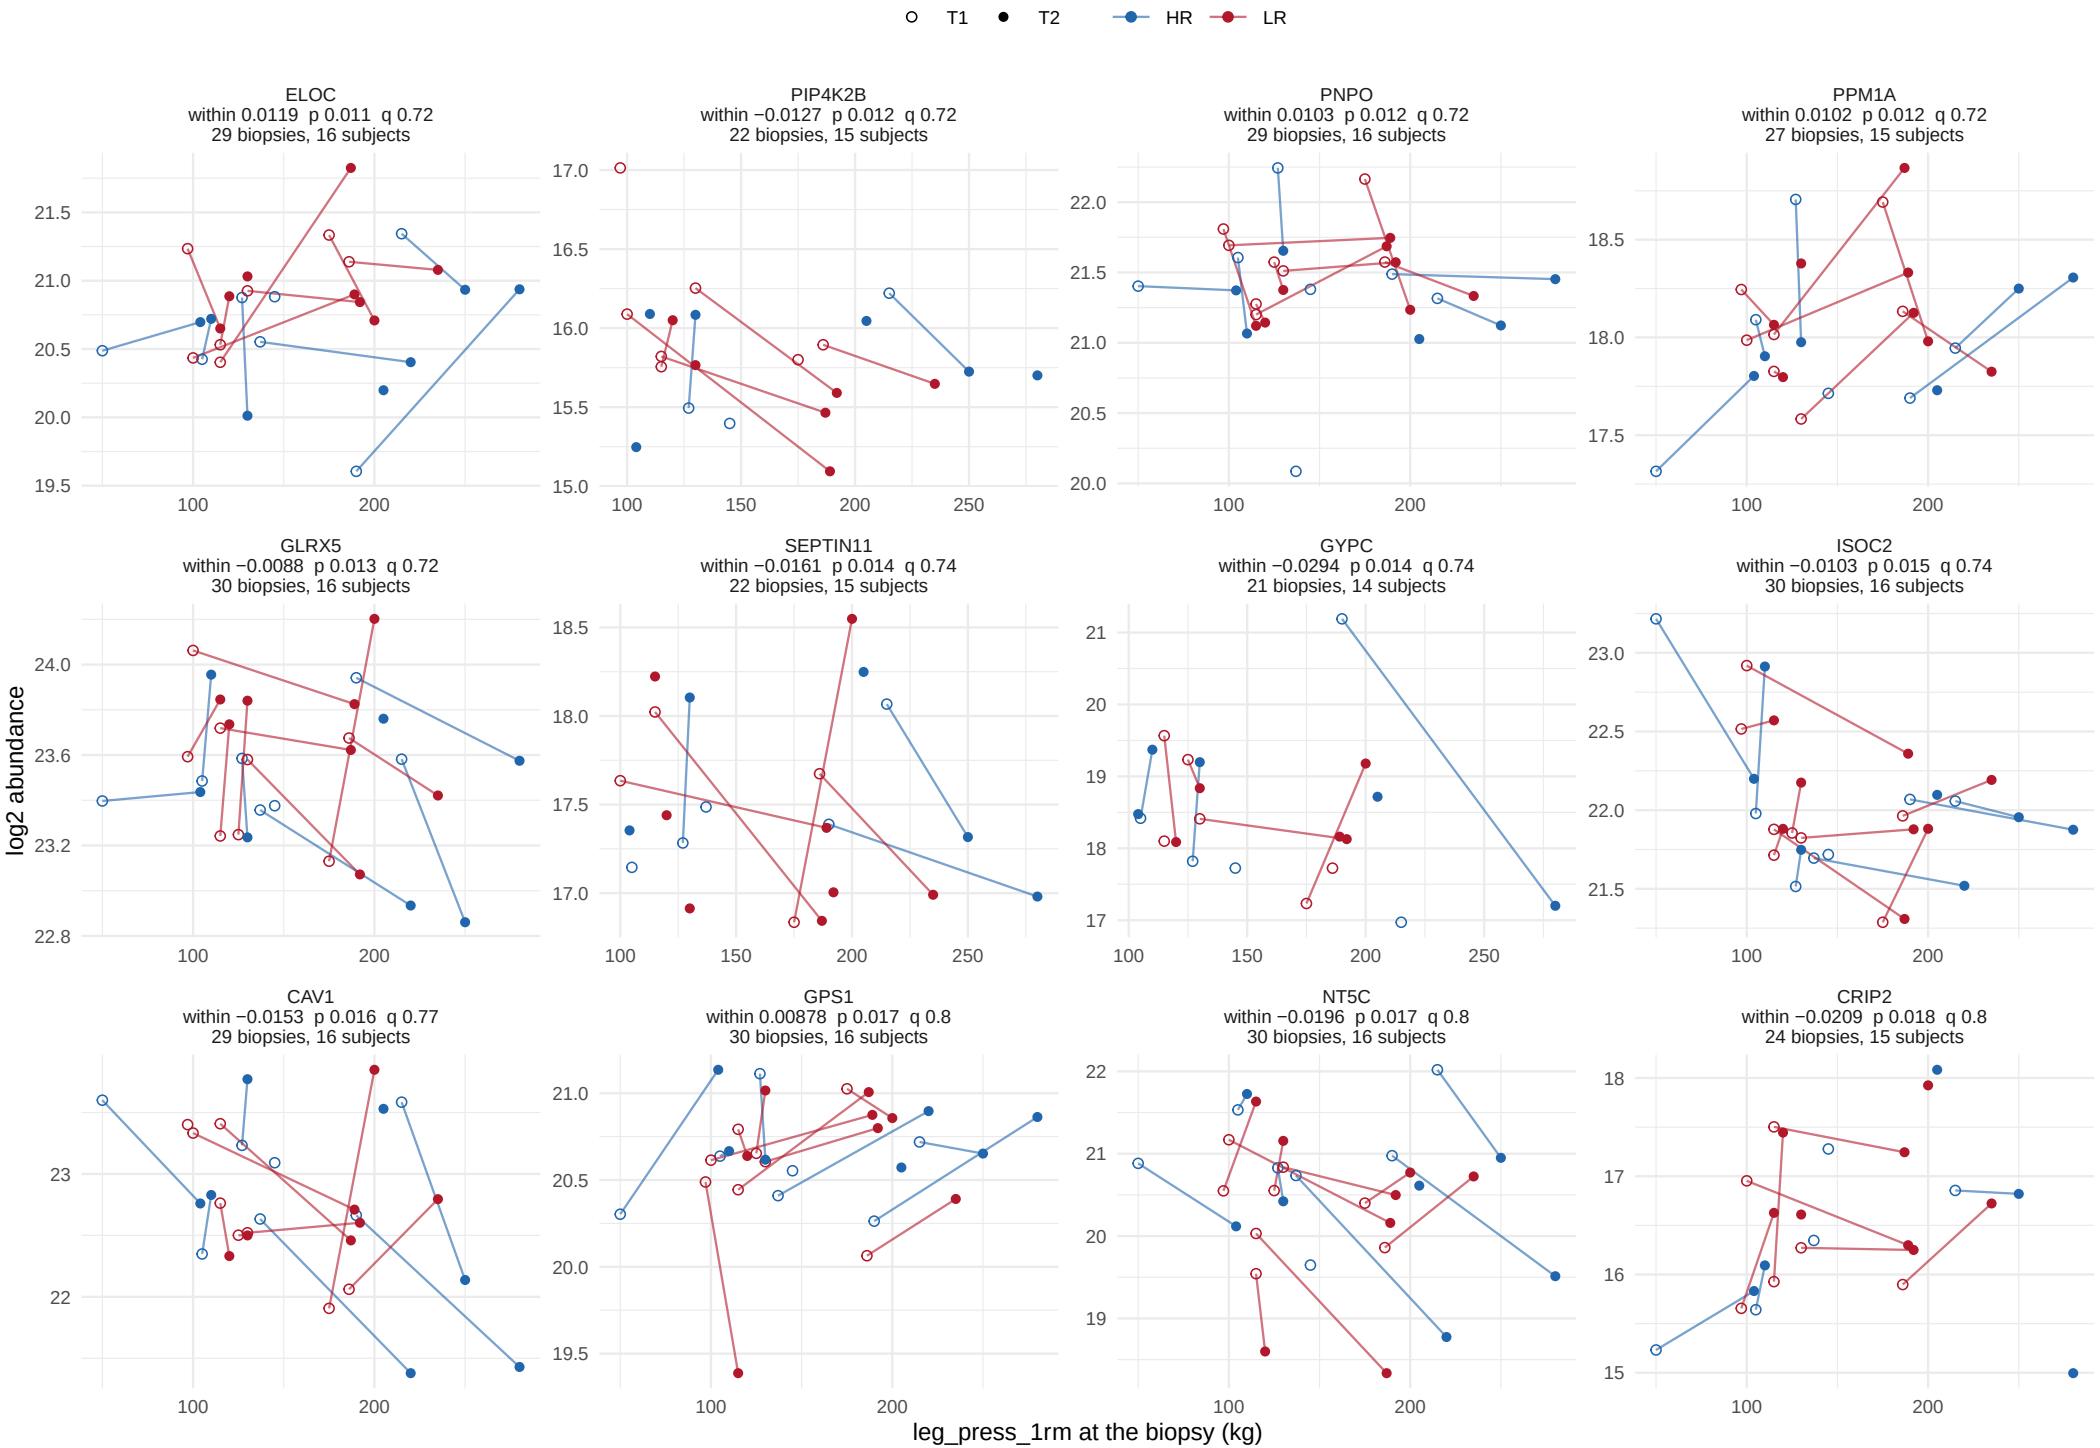

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_press_1rm, within−person term


88 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 4 of 8.

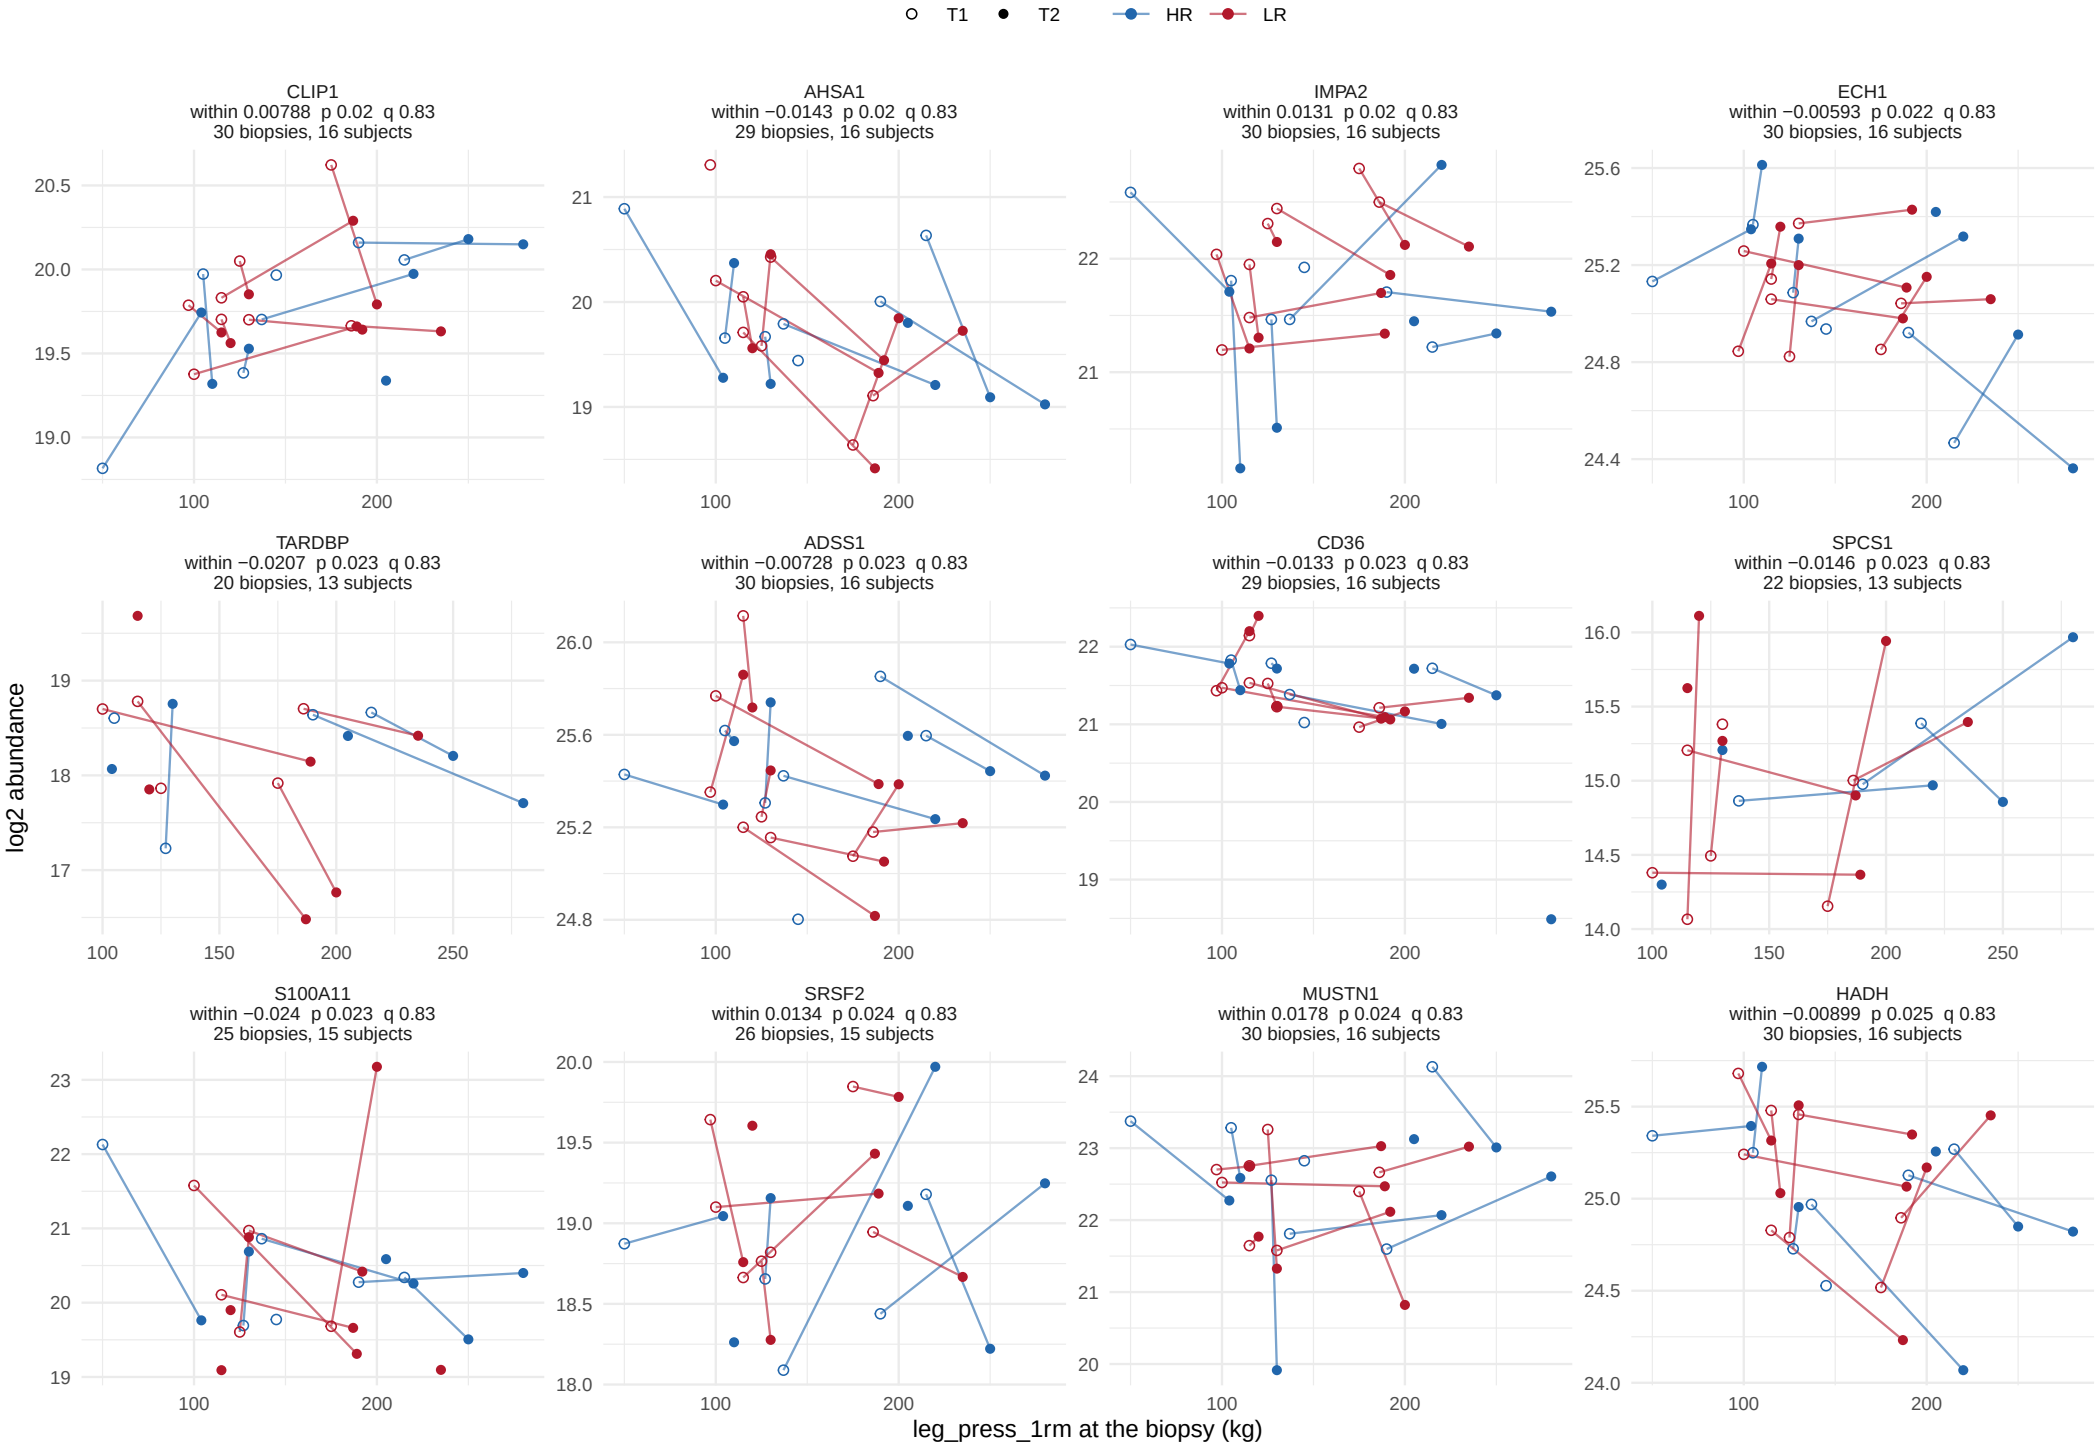

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_press_1rm, within−person term


88 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 5 of 8.

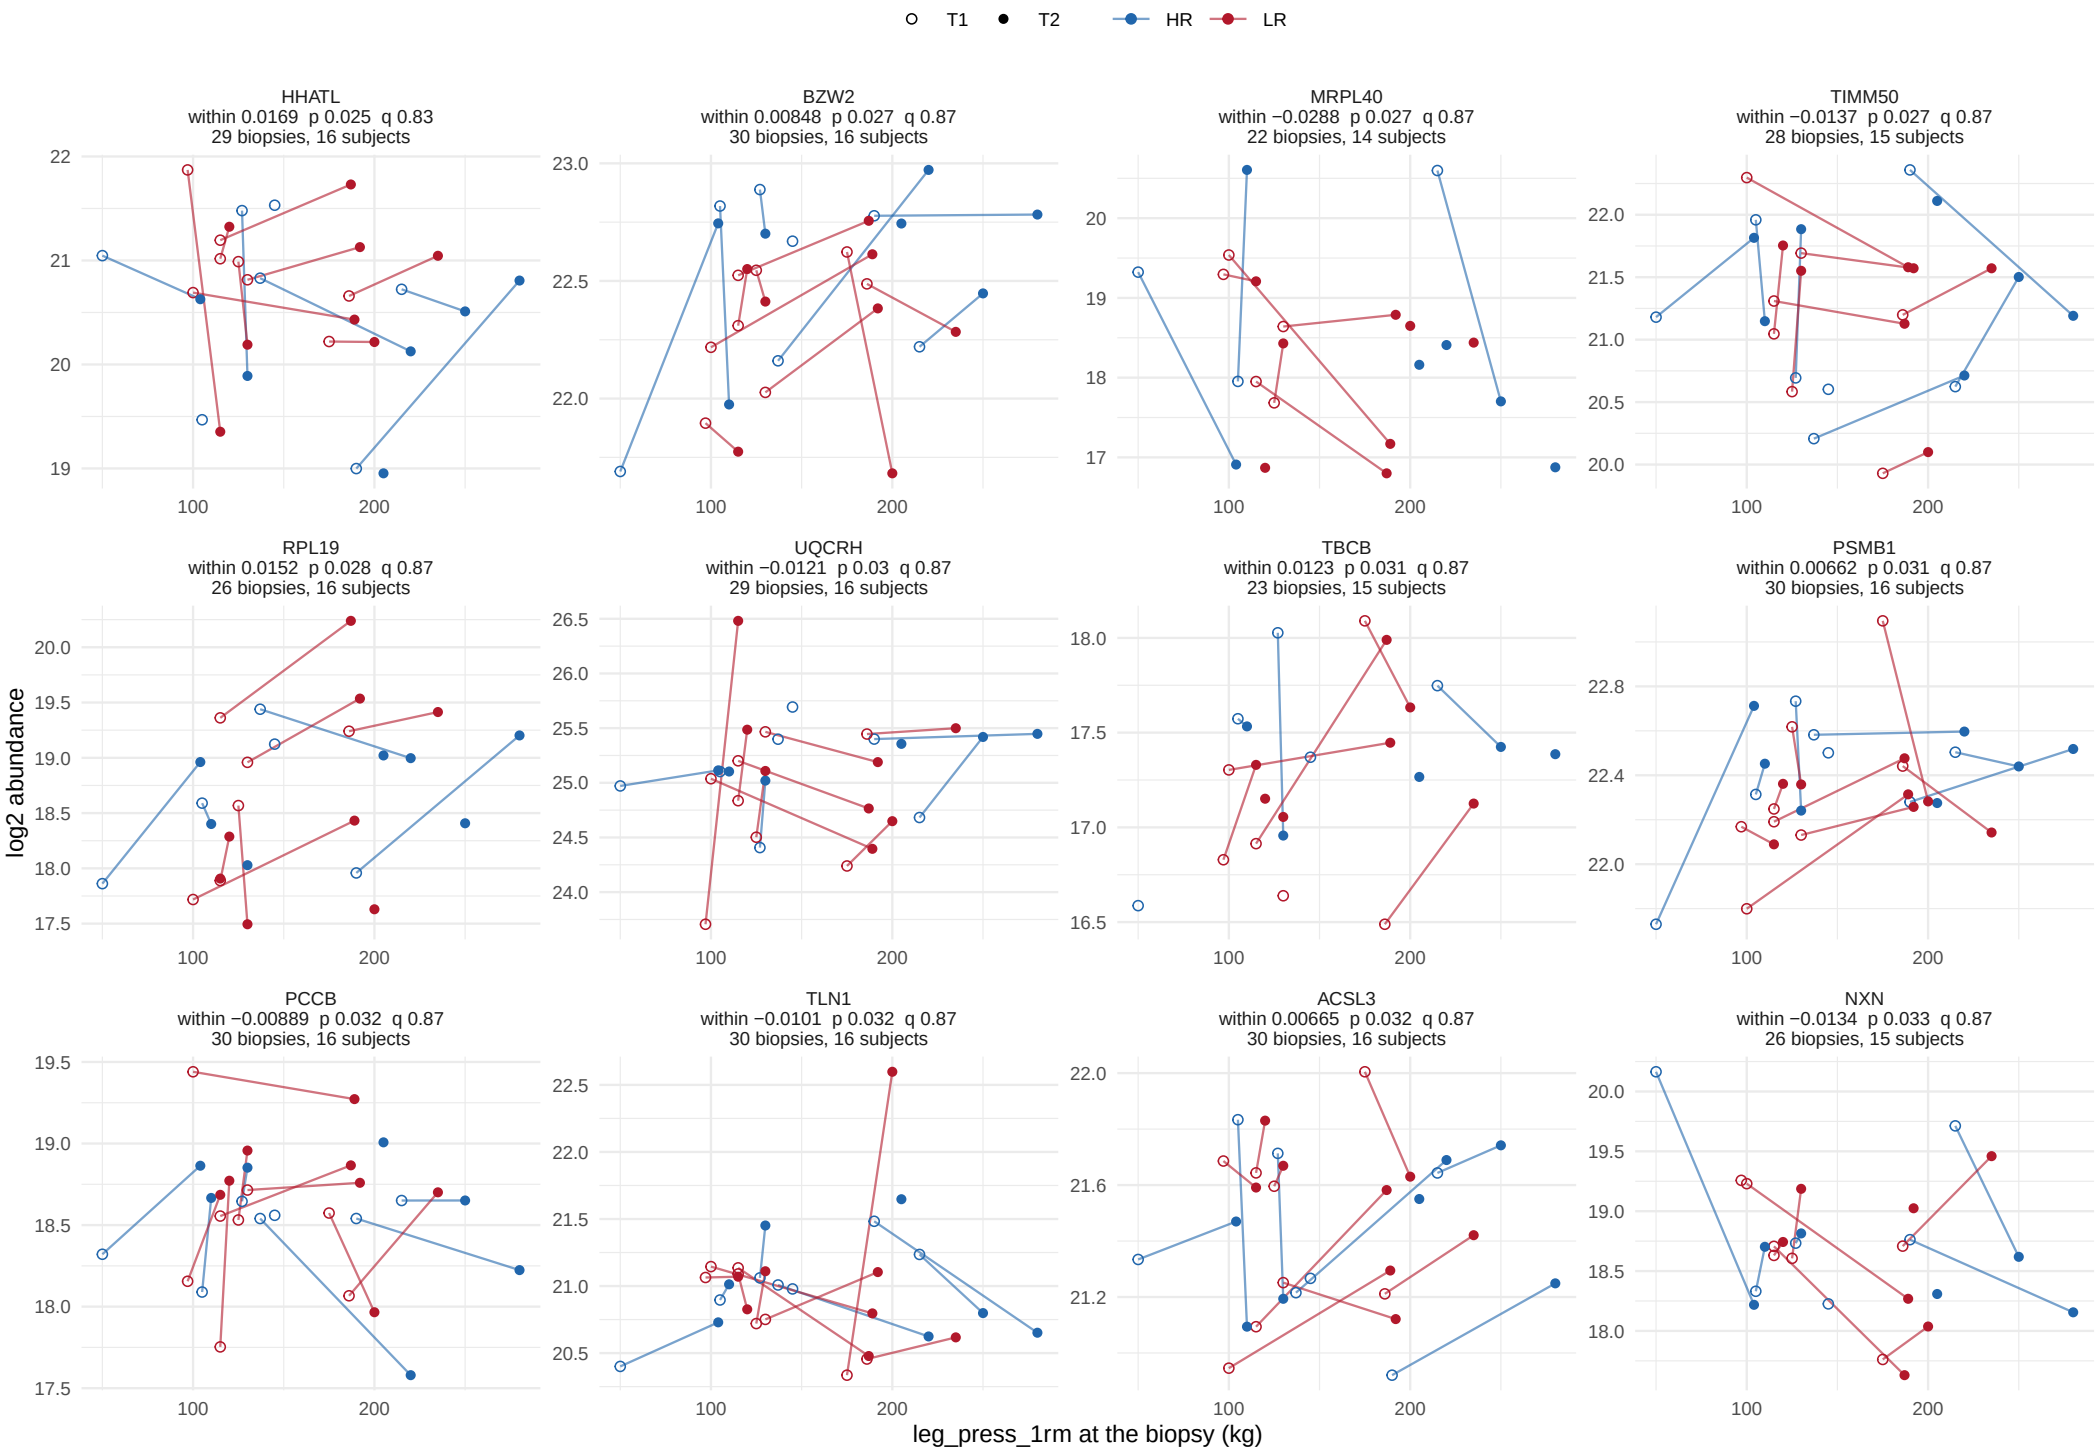

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_press_1rm, within−person term


88 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 6 of 8.

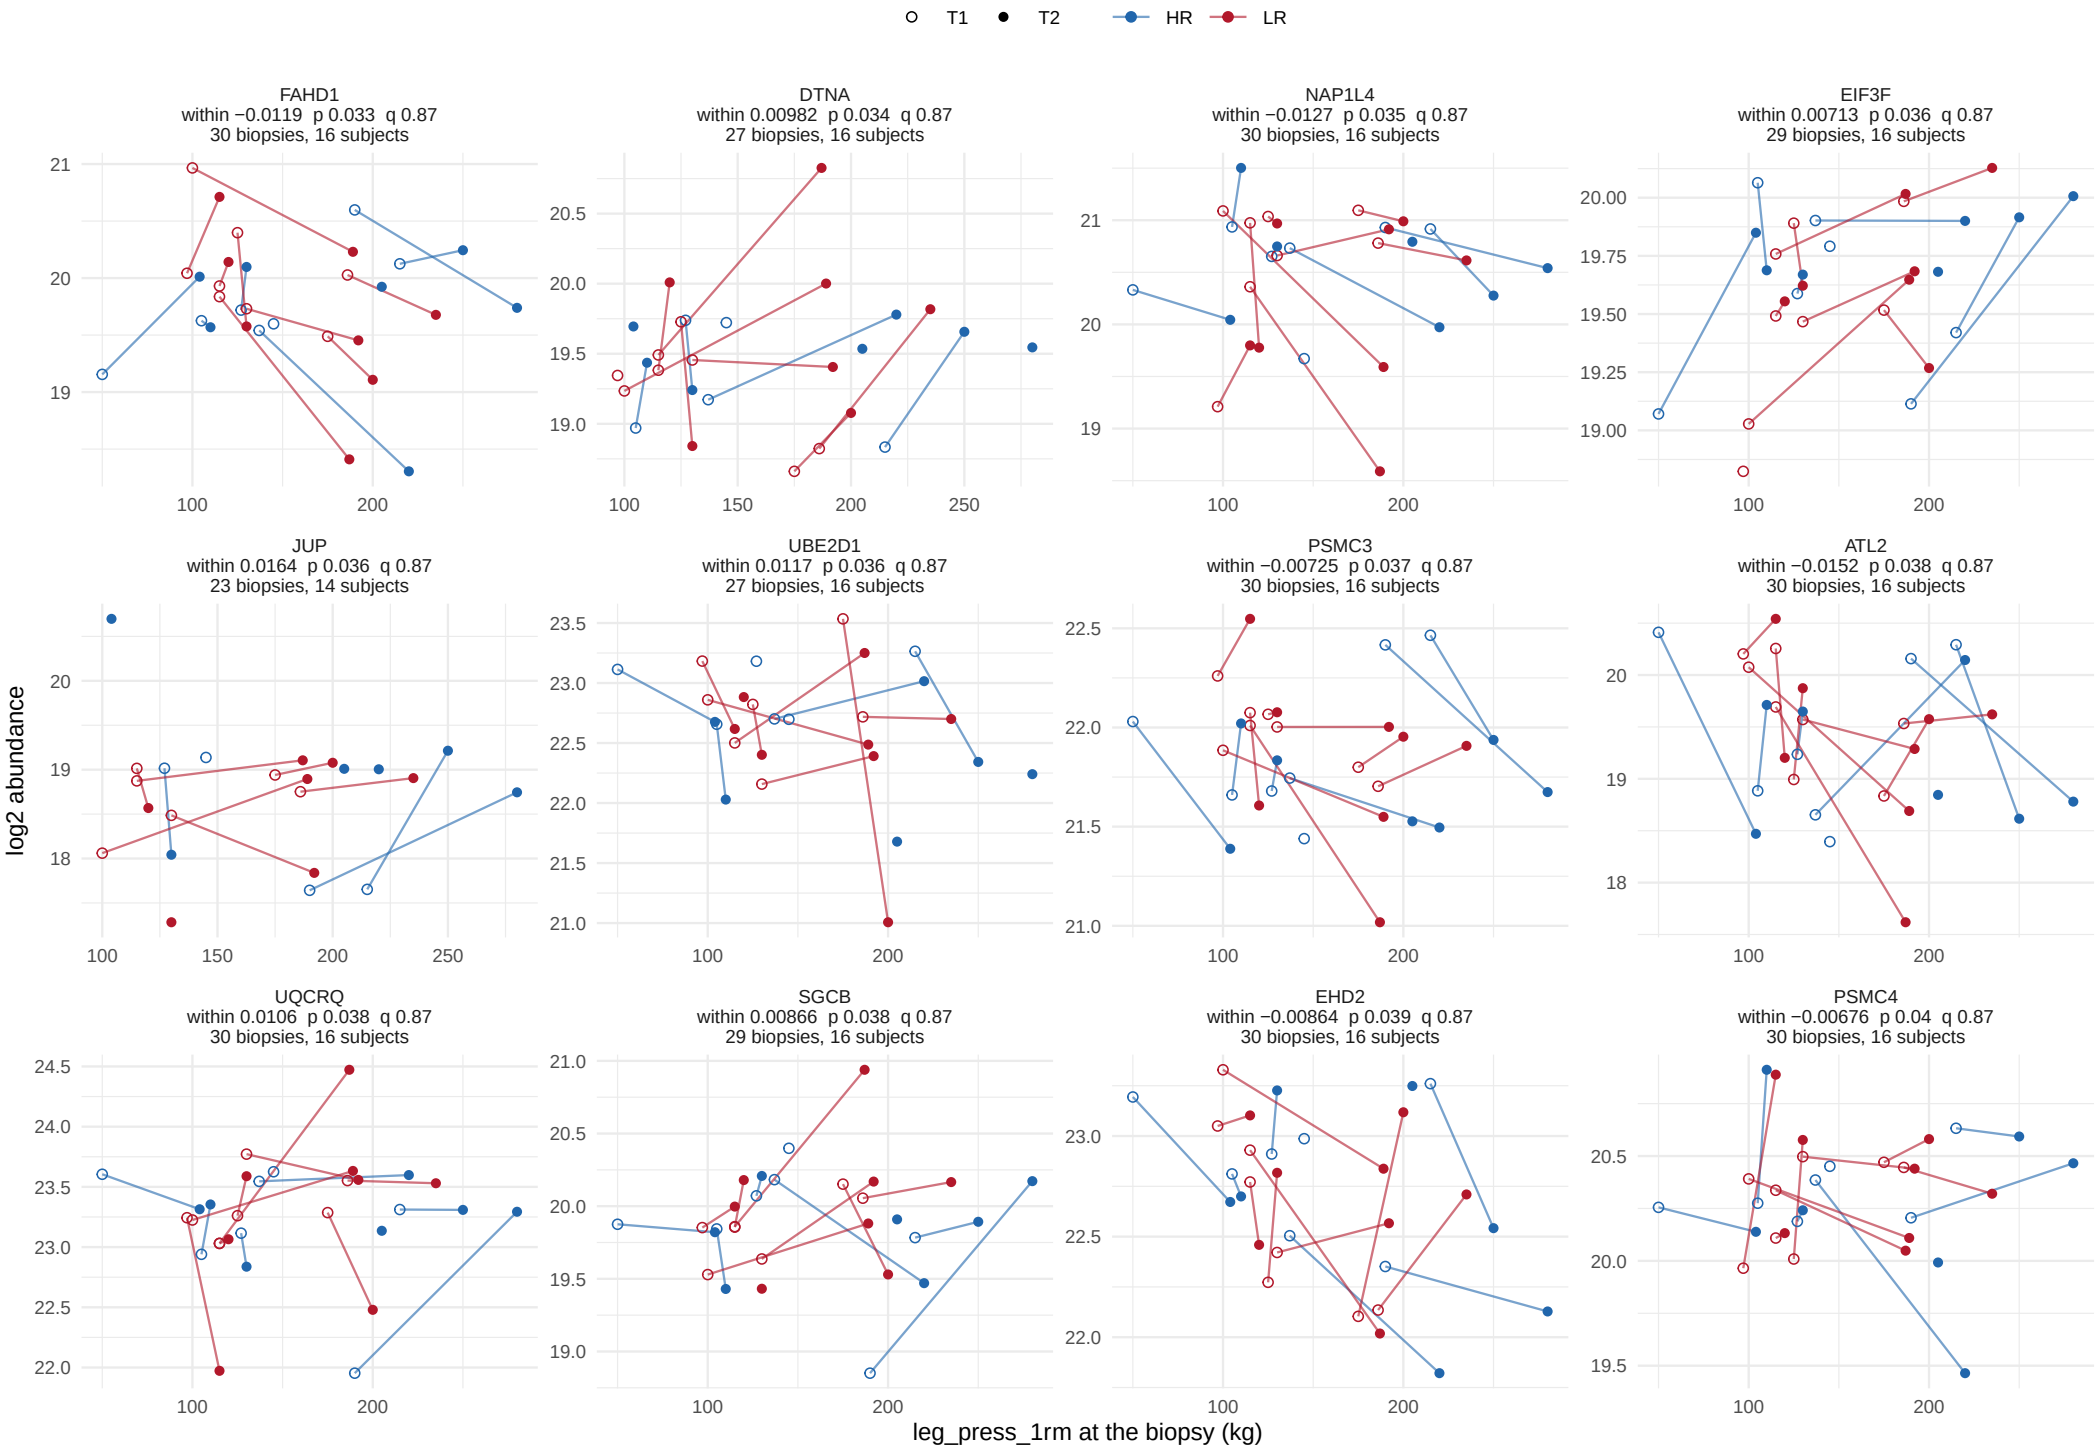

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_press_1rm, within−person term


88 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 7 of 8.

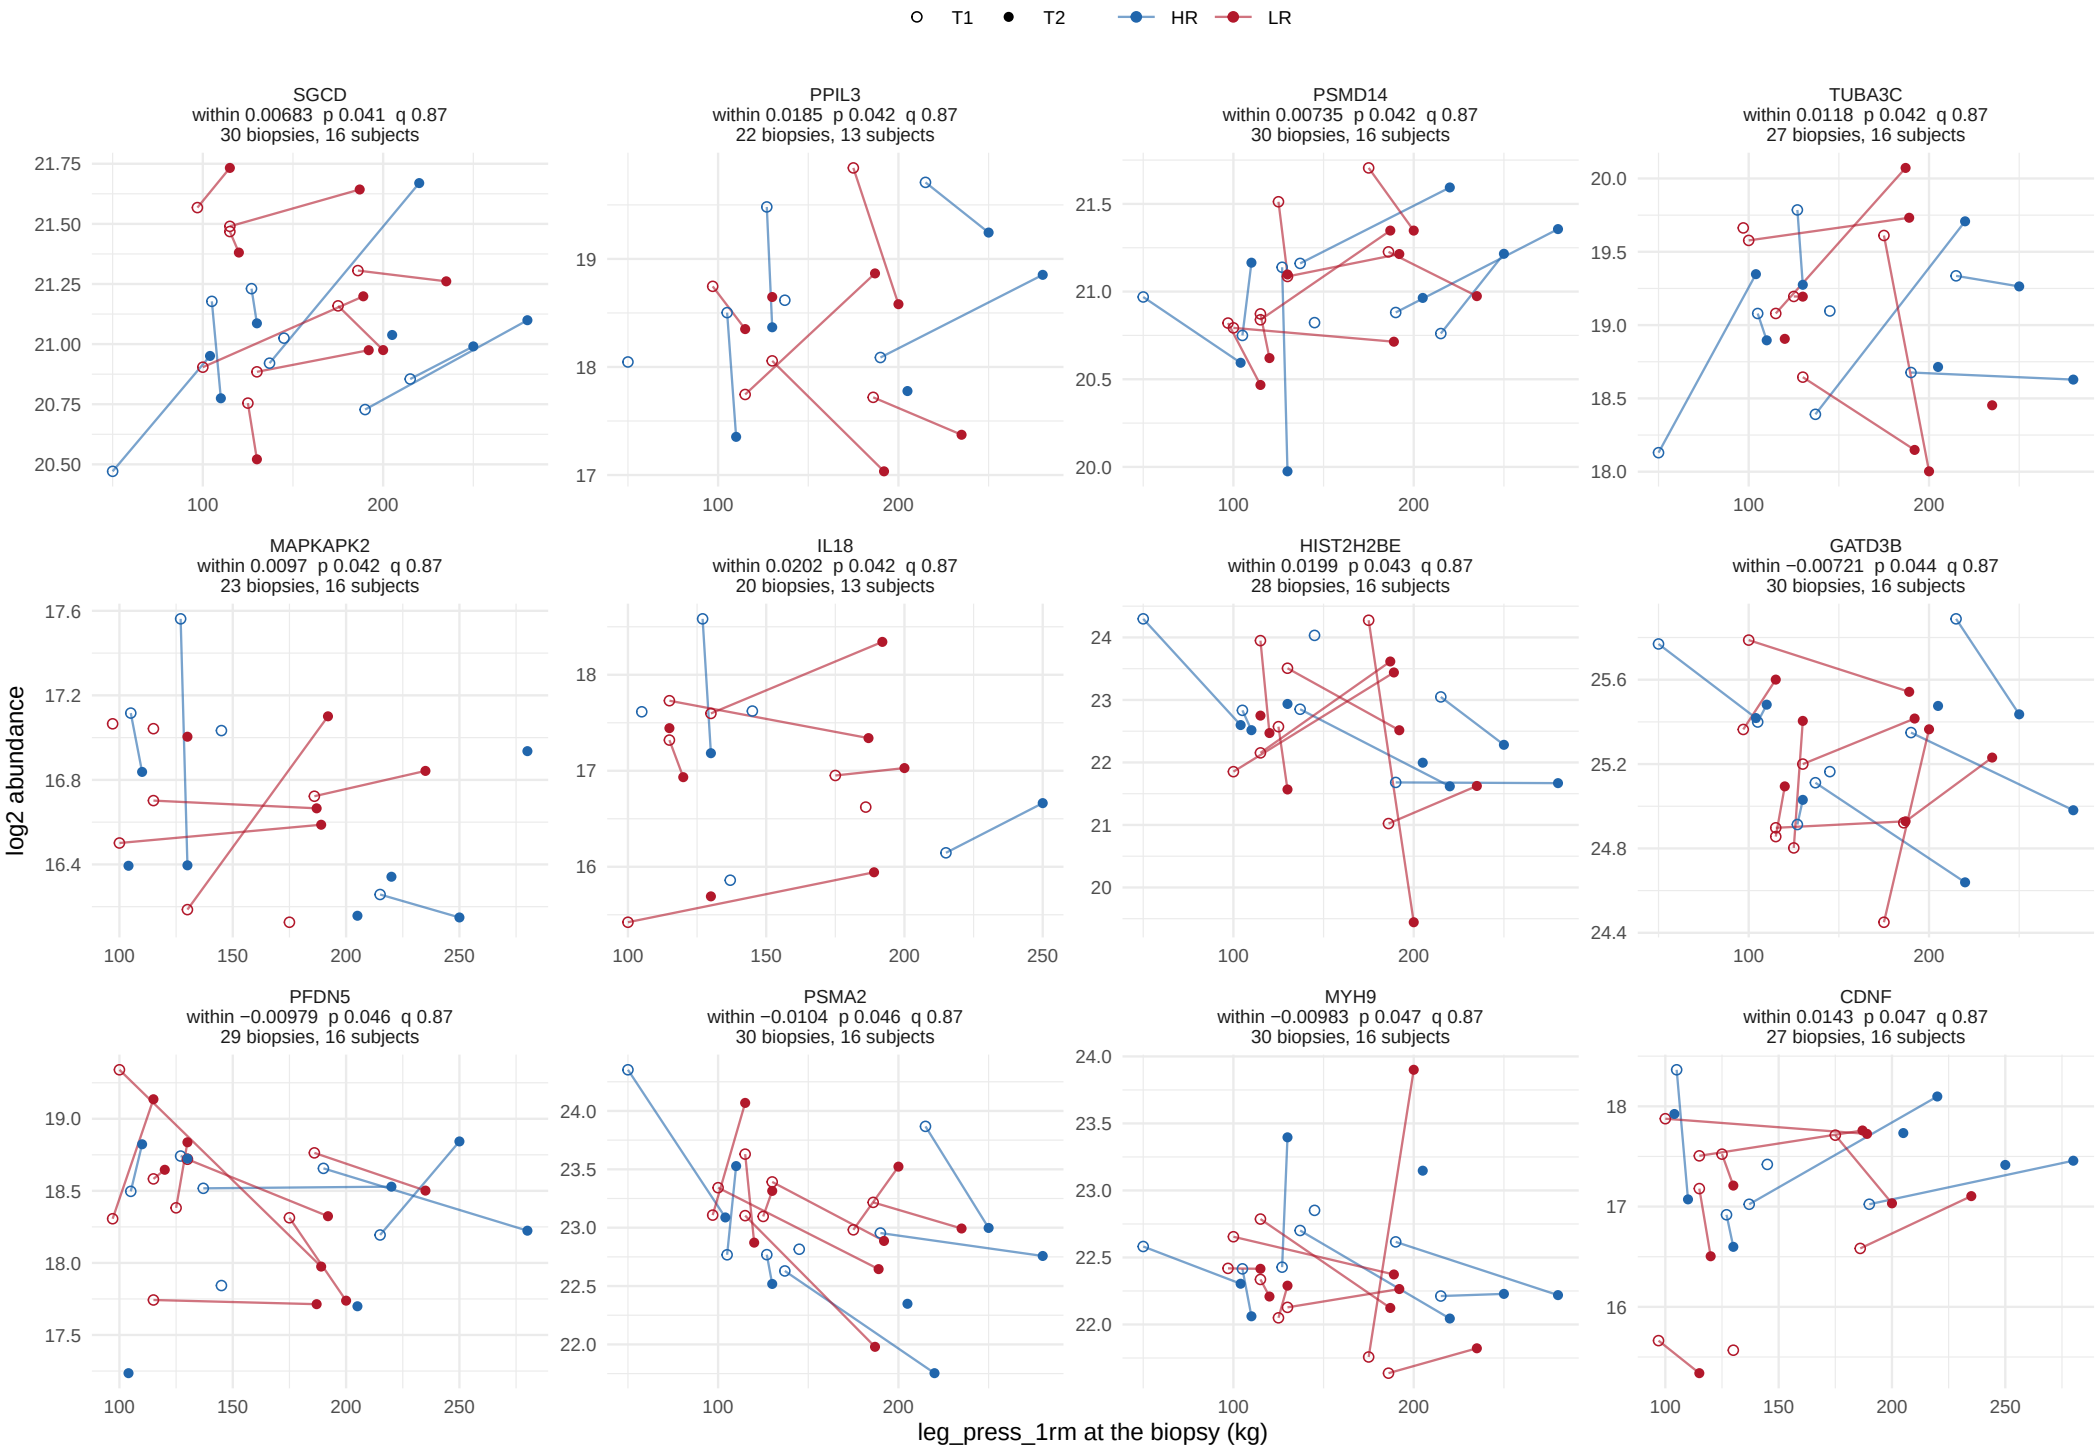

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_press_1rm, within−person term


88 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 8 of 8.

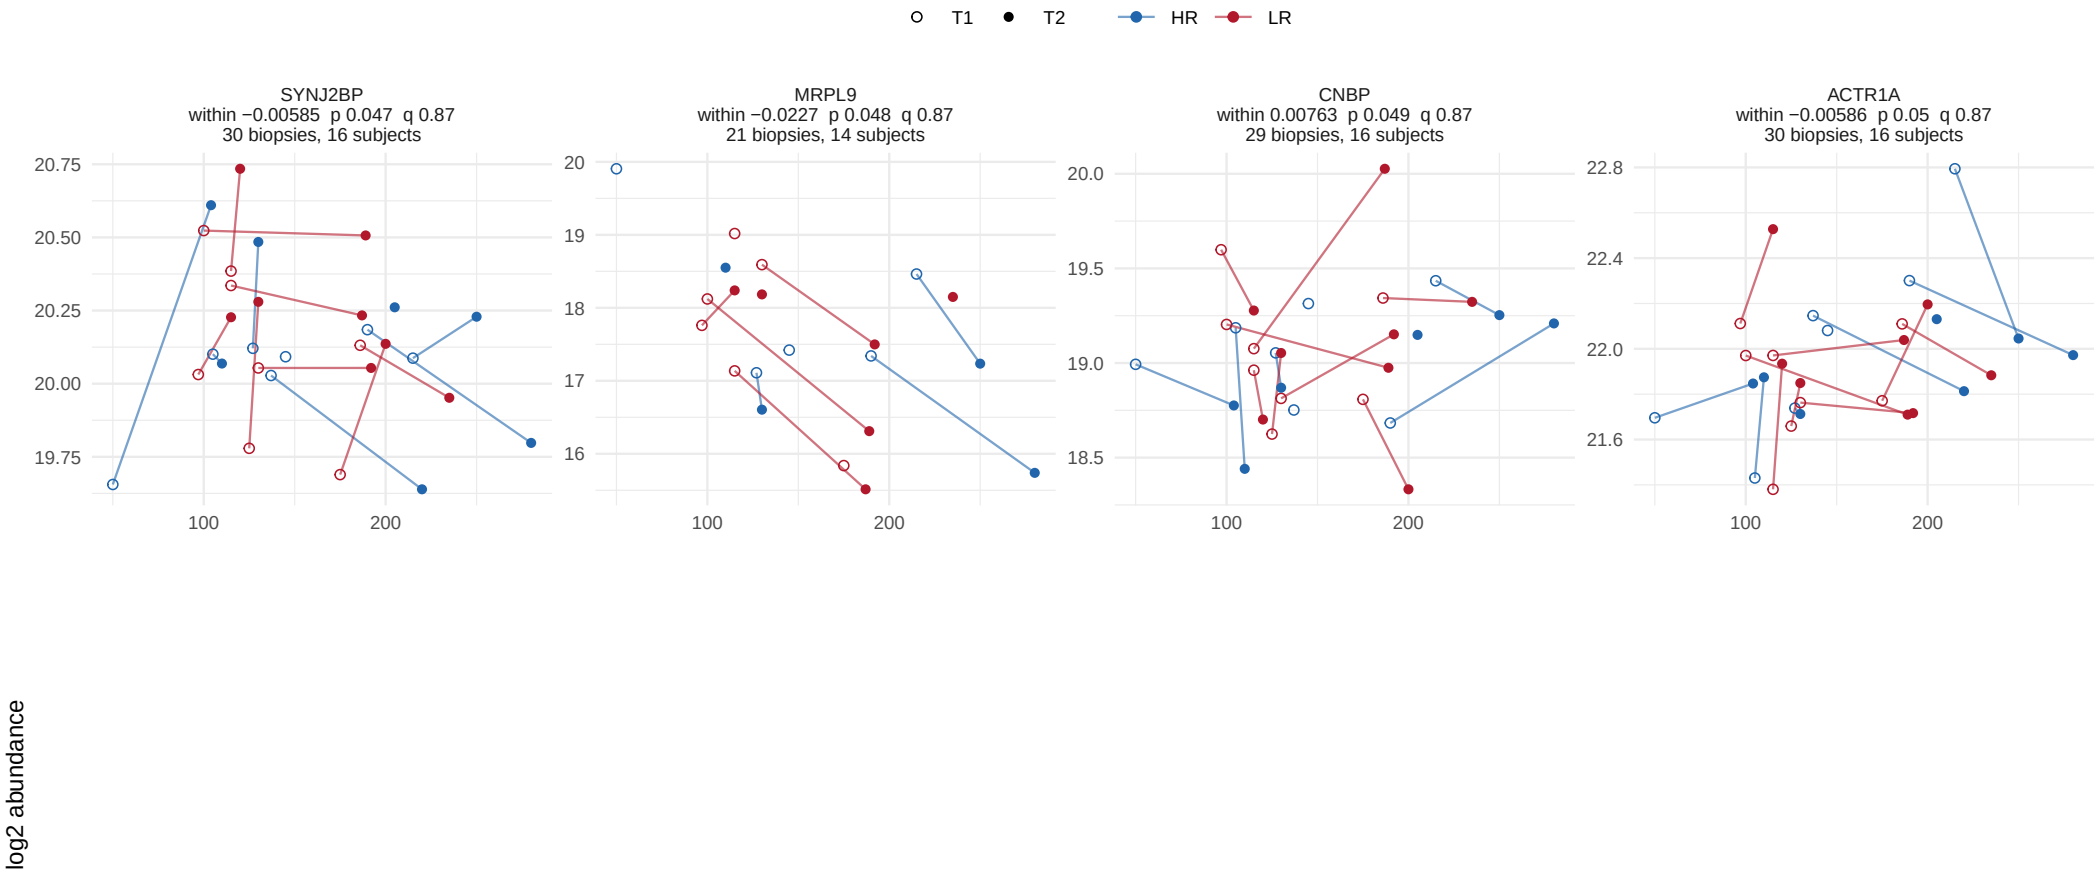

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_press_1rm, between−person term


83 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 1 of 7.

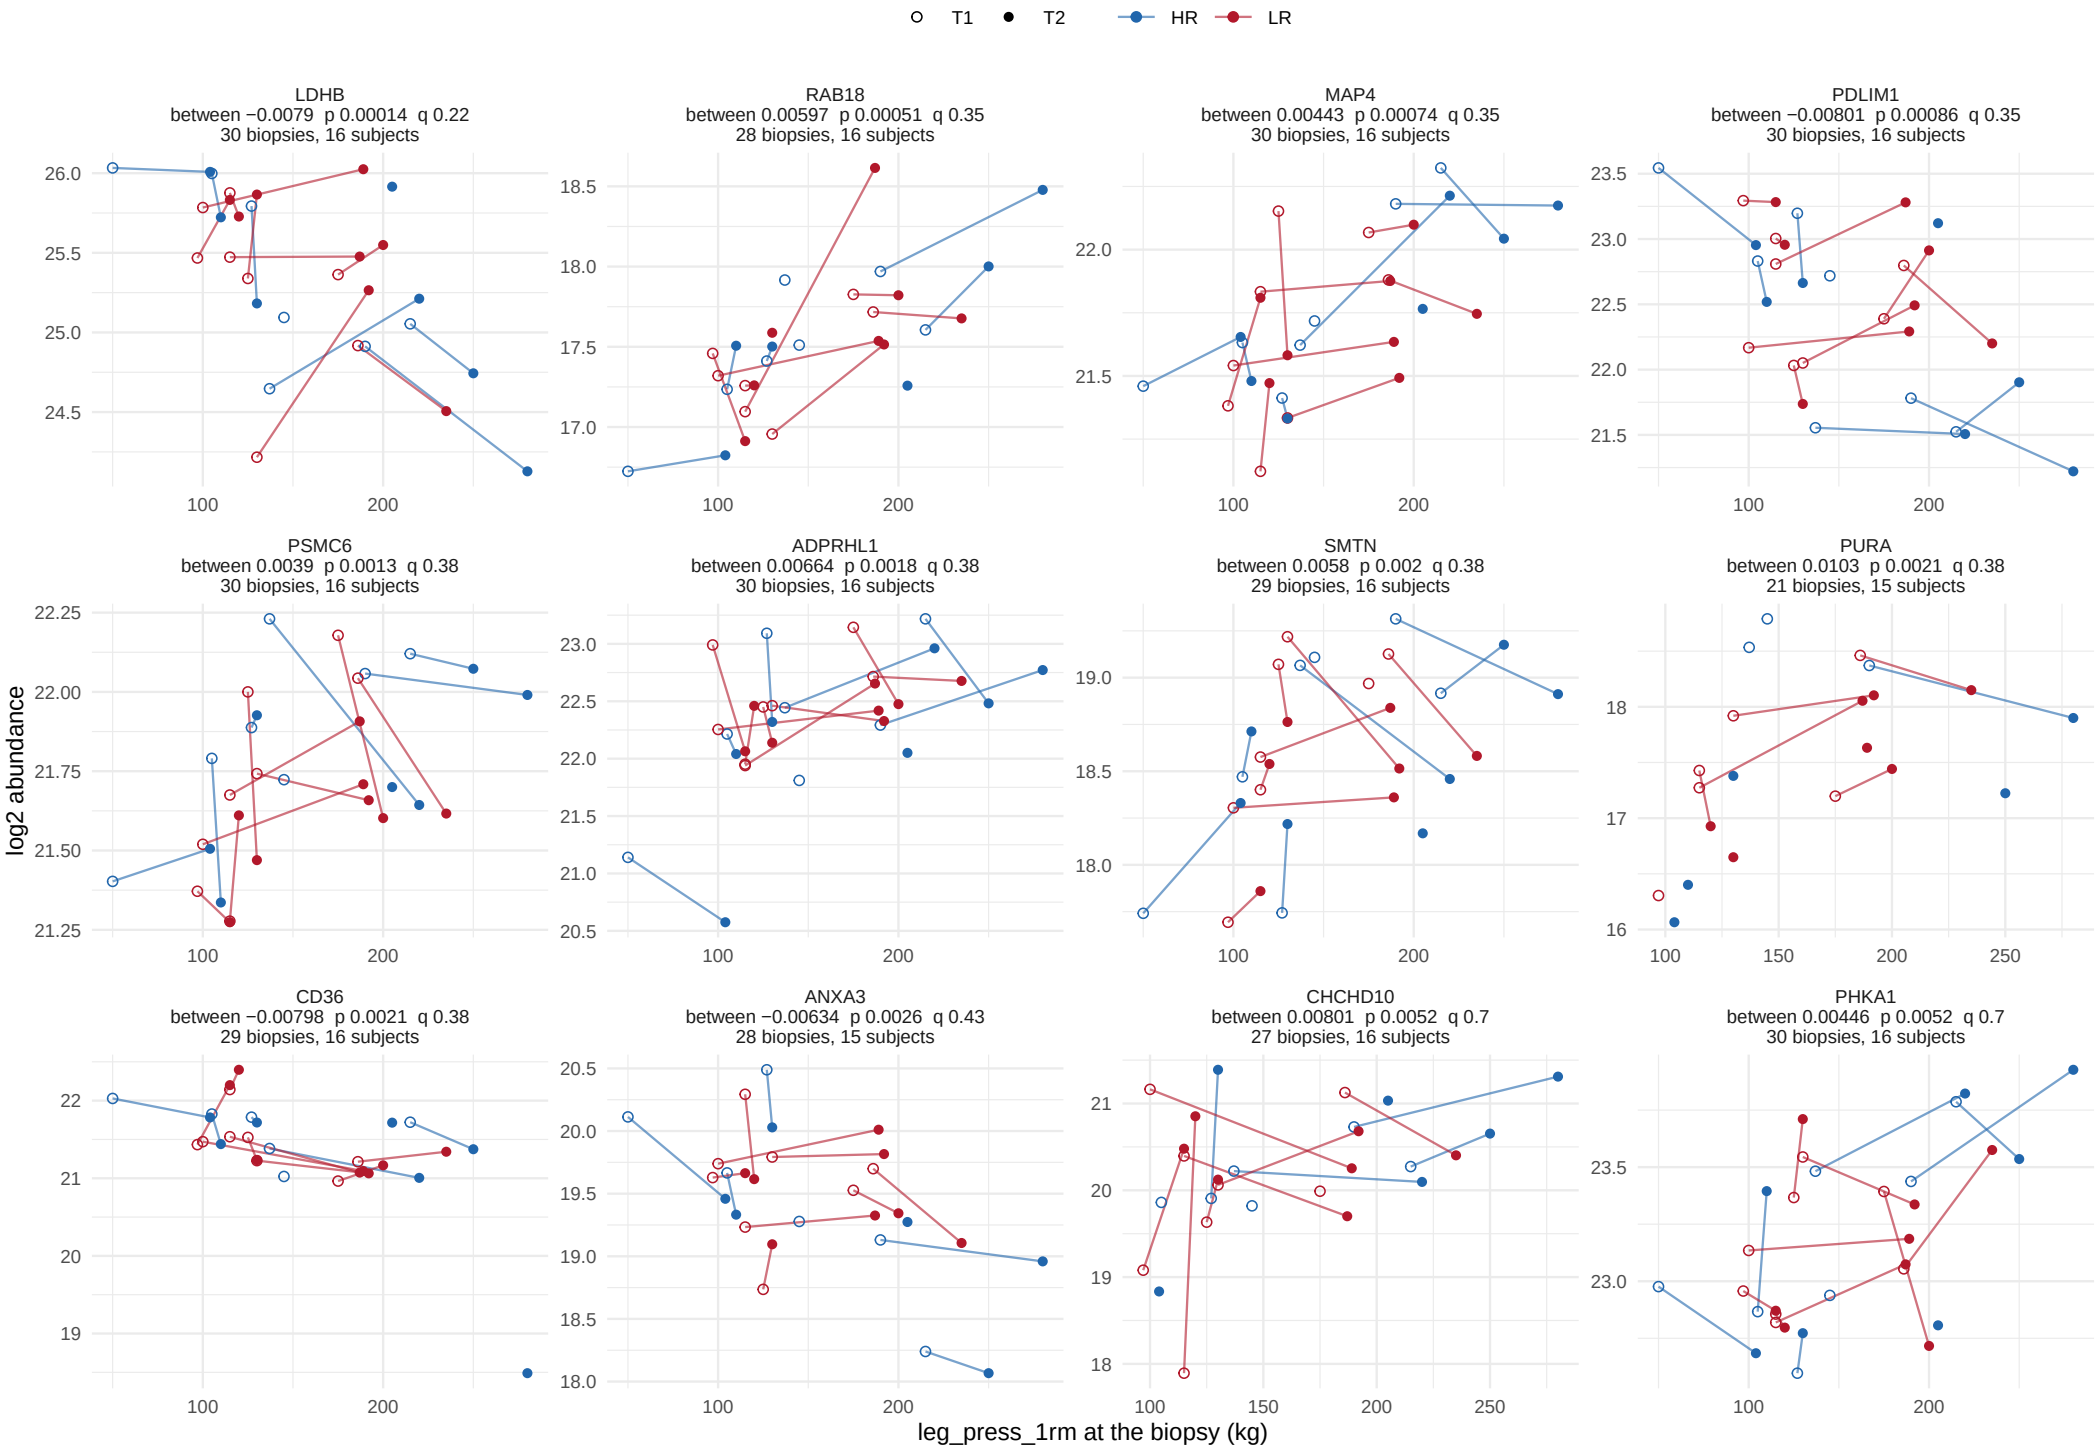

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_press_1rm, between−person term


83 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 2 of 7.

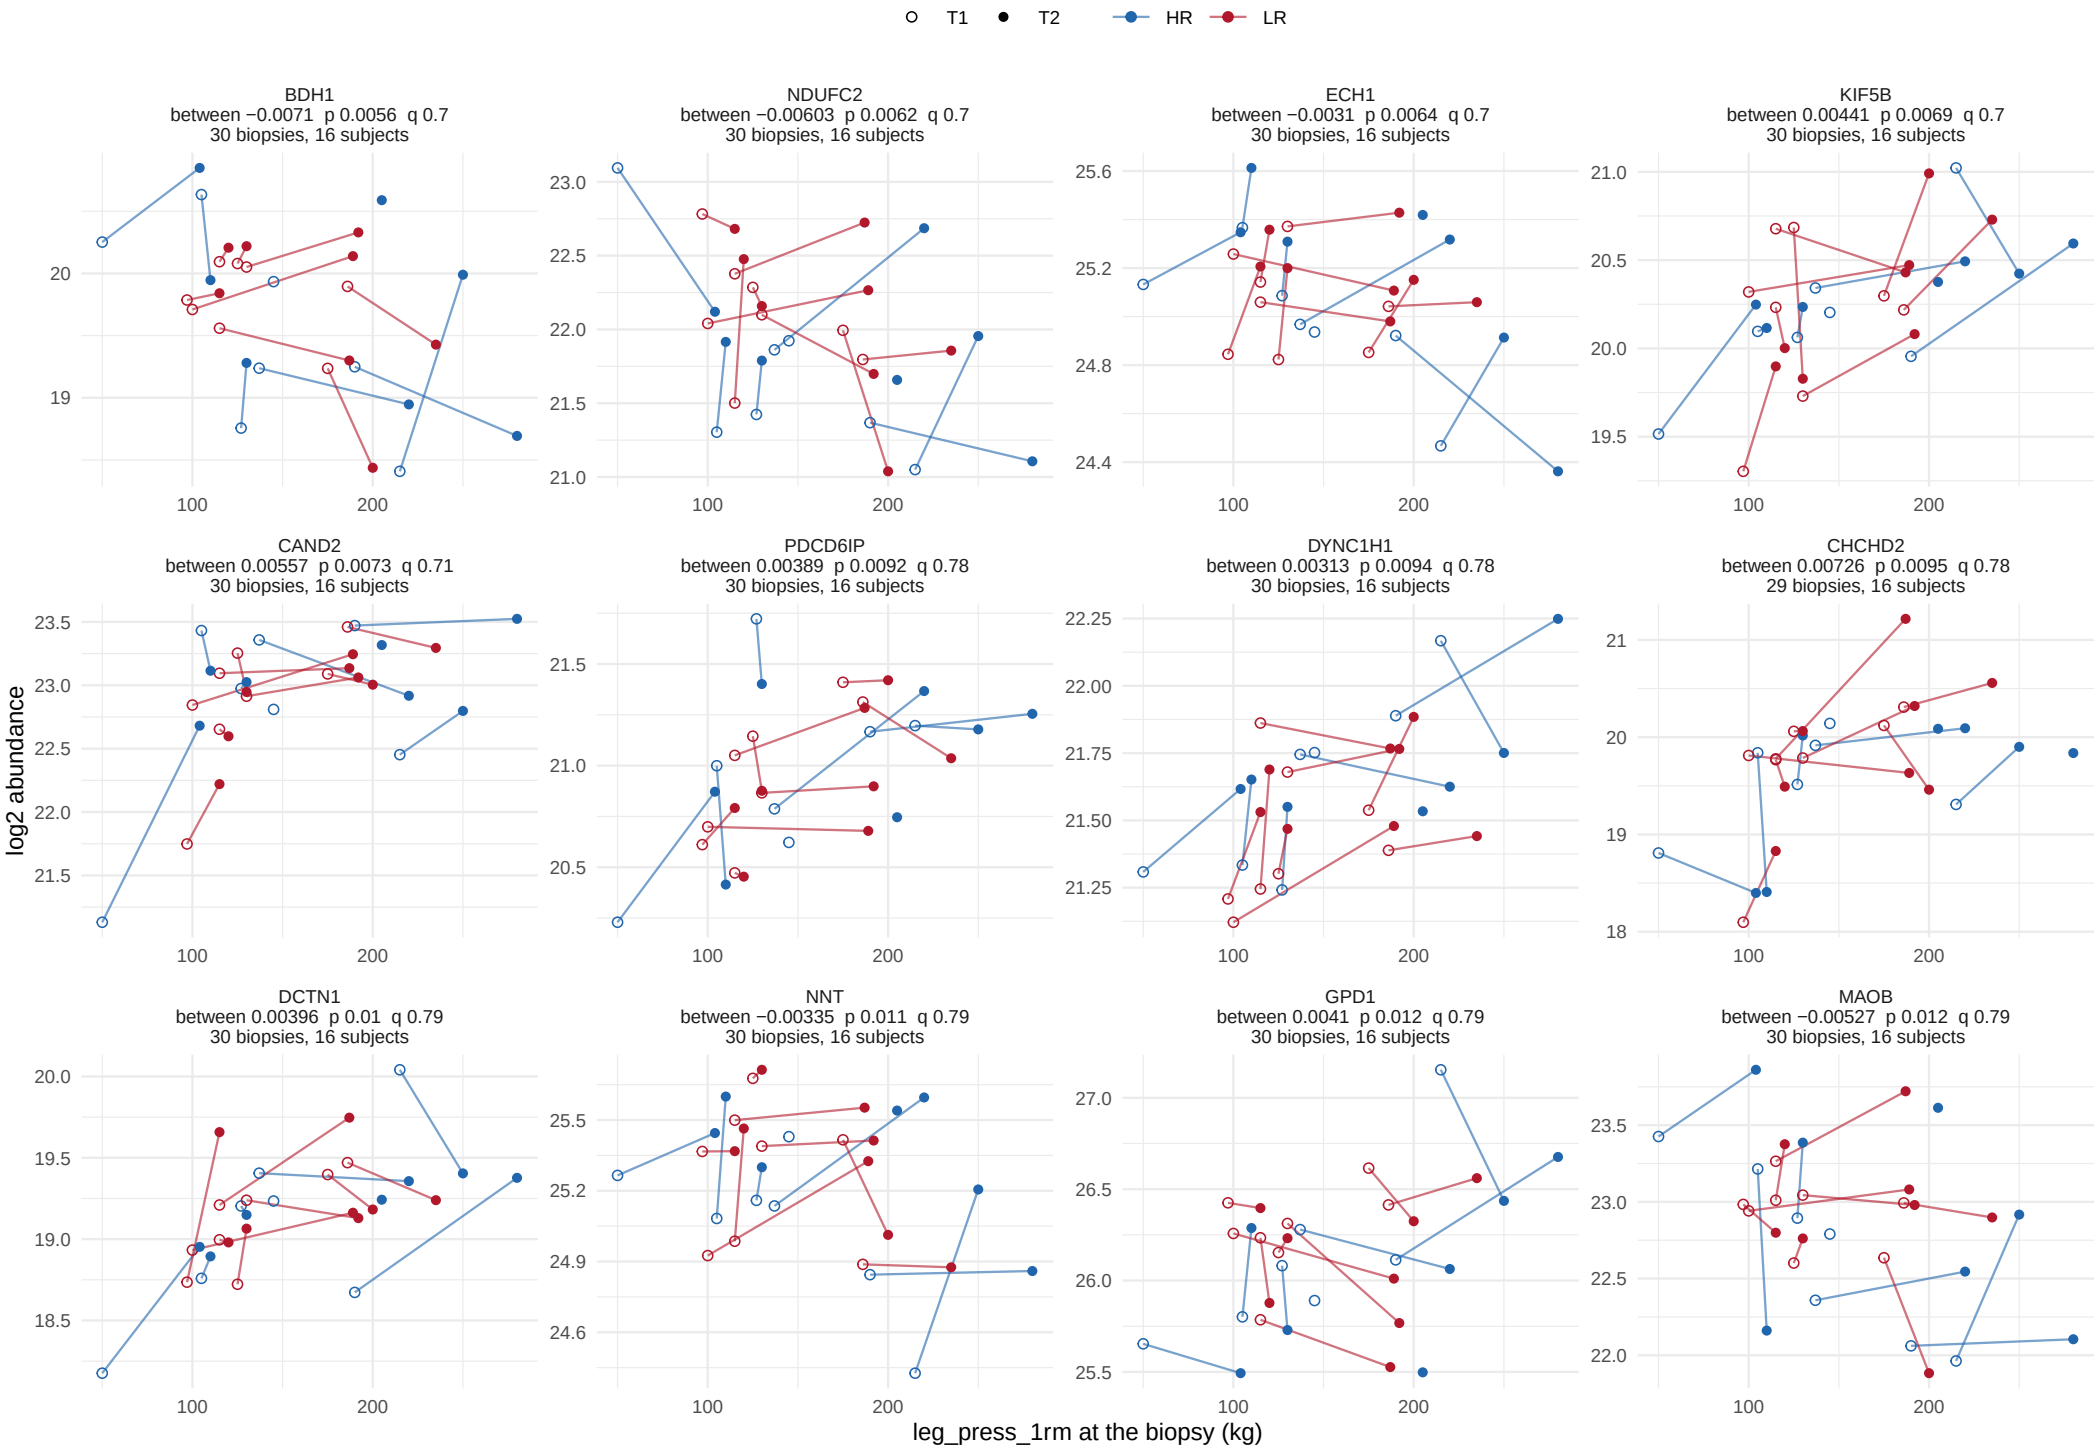

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_press_1rm, between−person term


83 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 3 of 7.

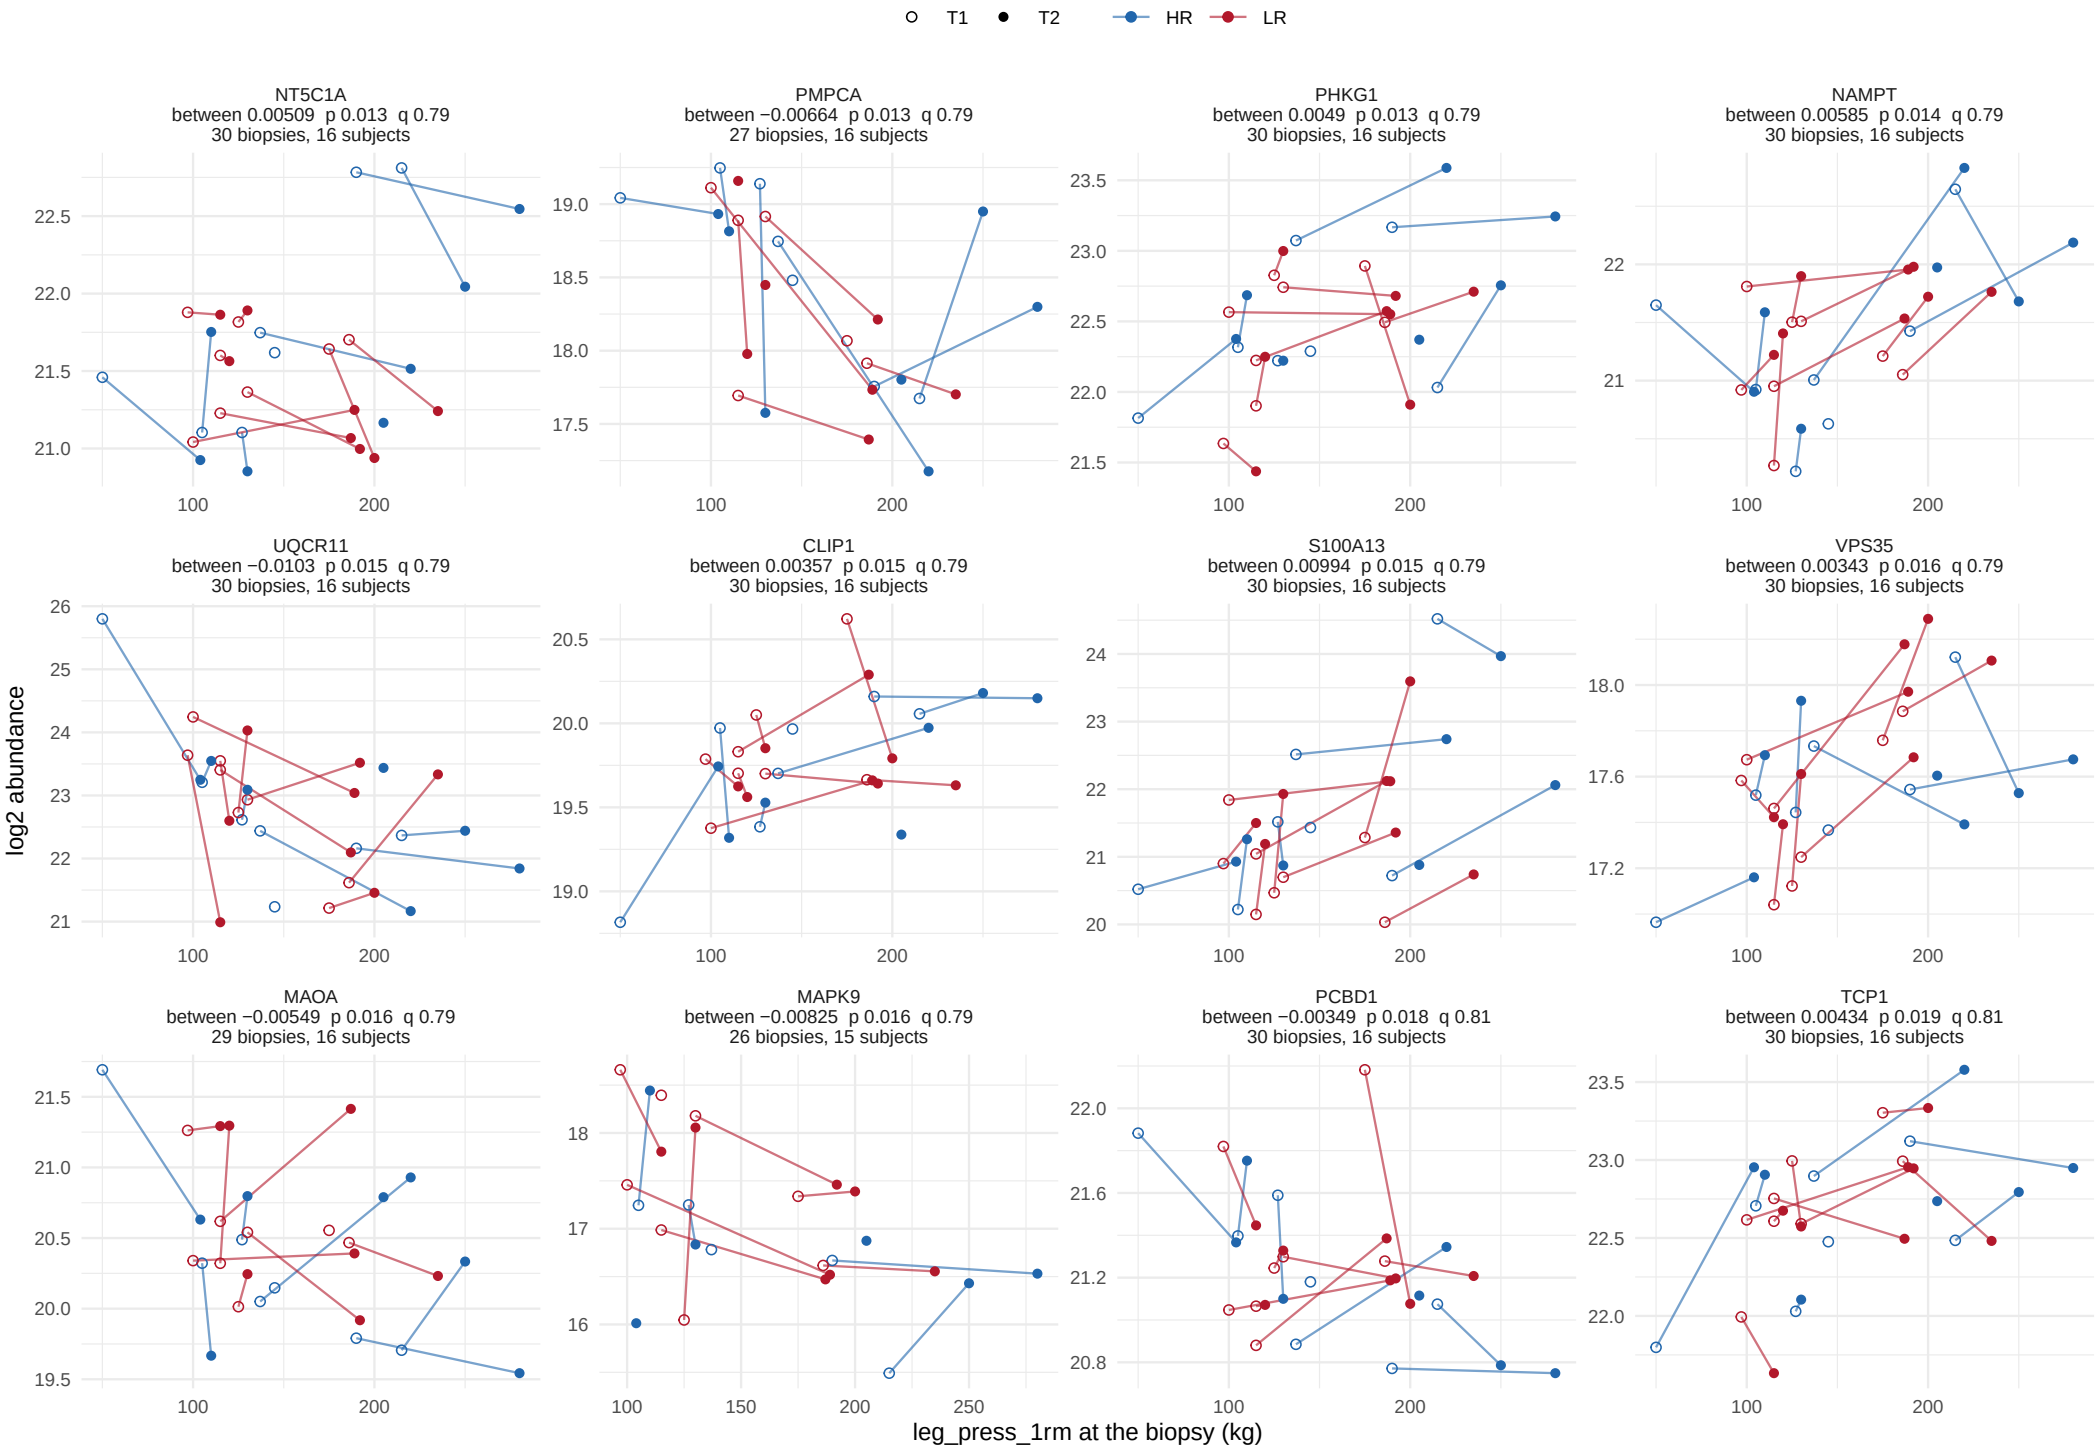

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_press_1rm, between−person term


83 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 4 of 7.

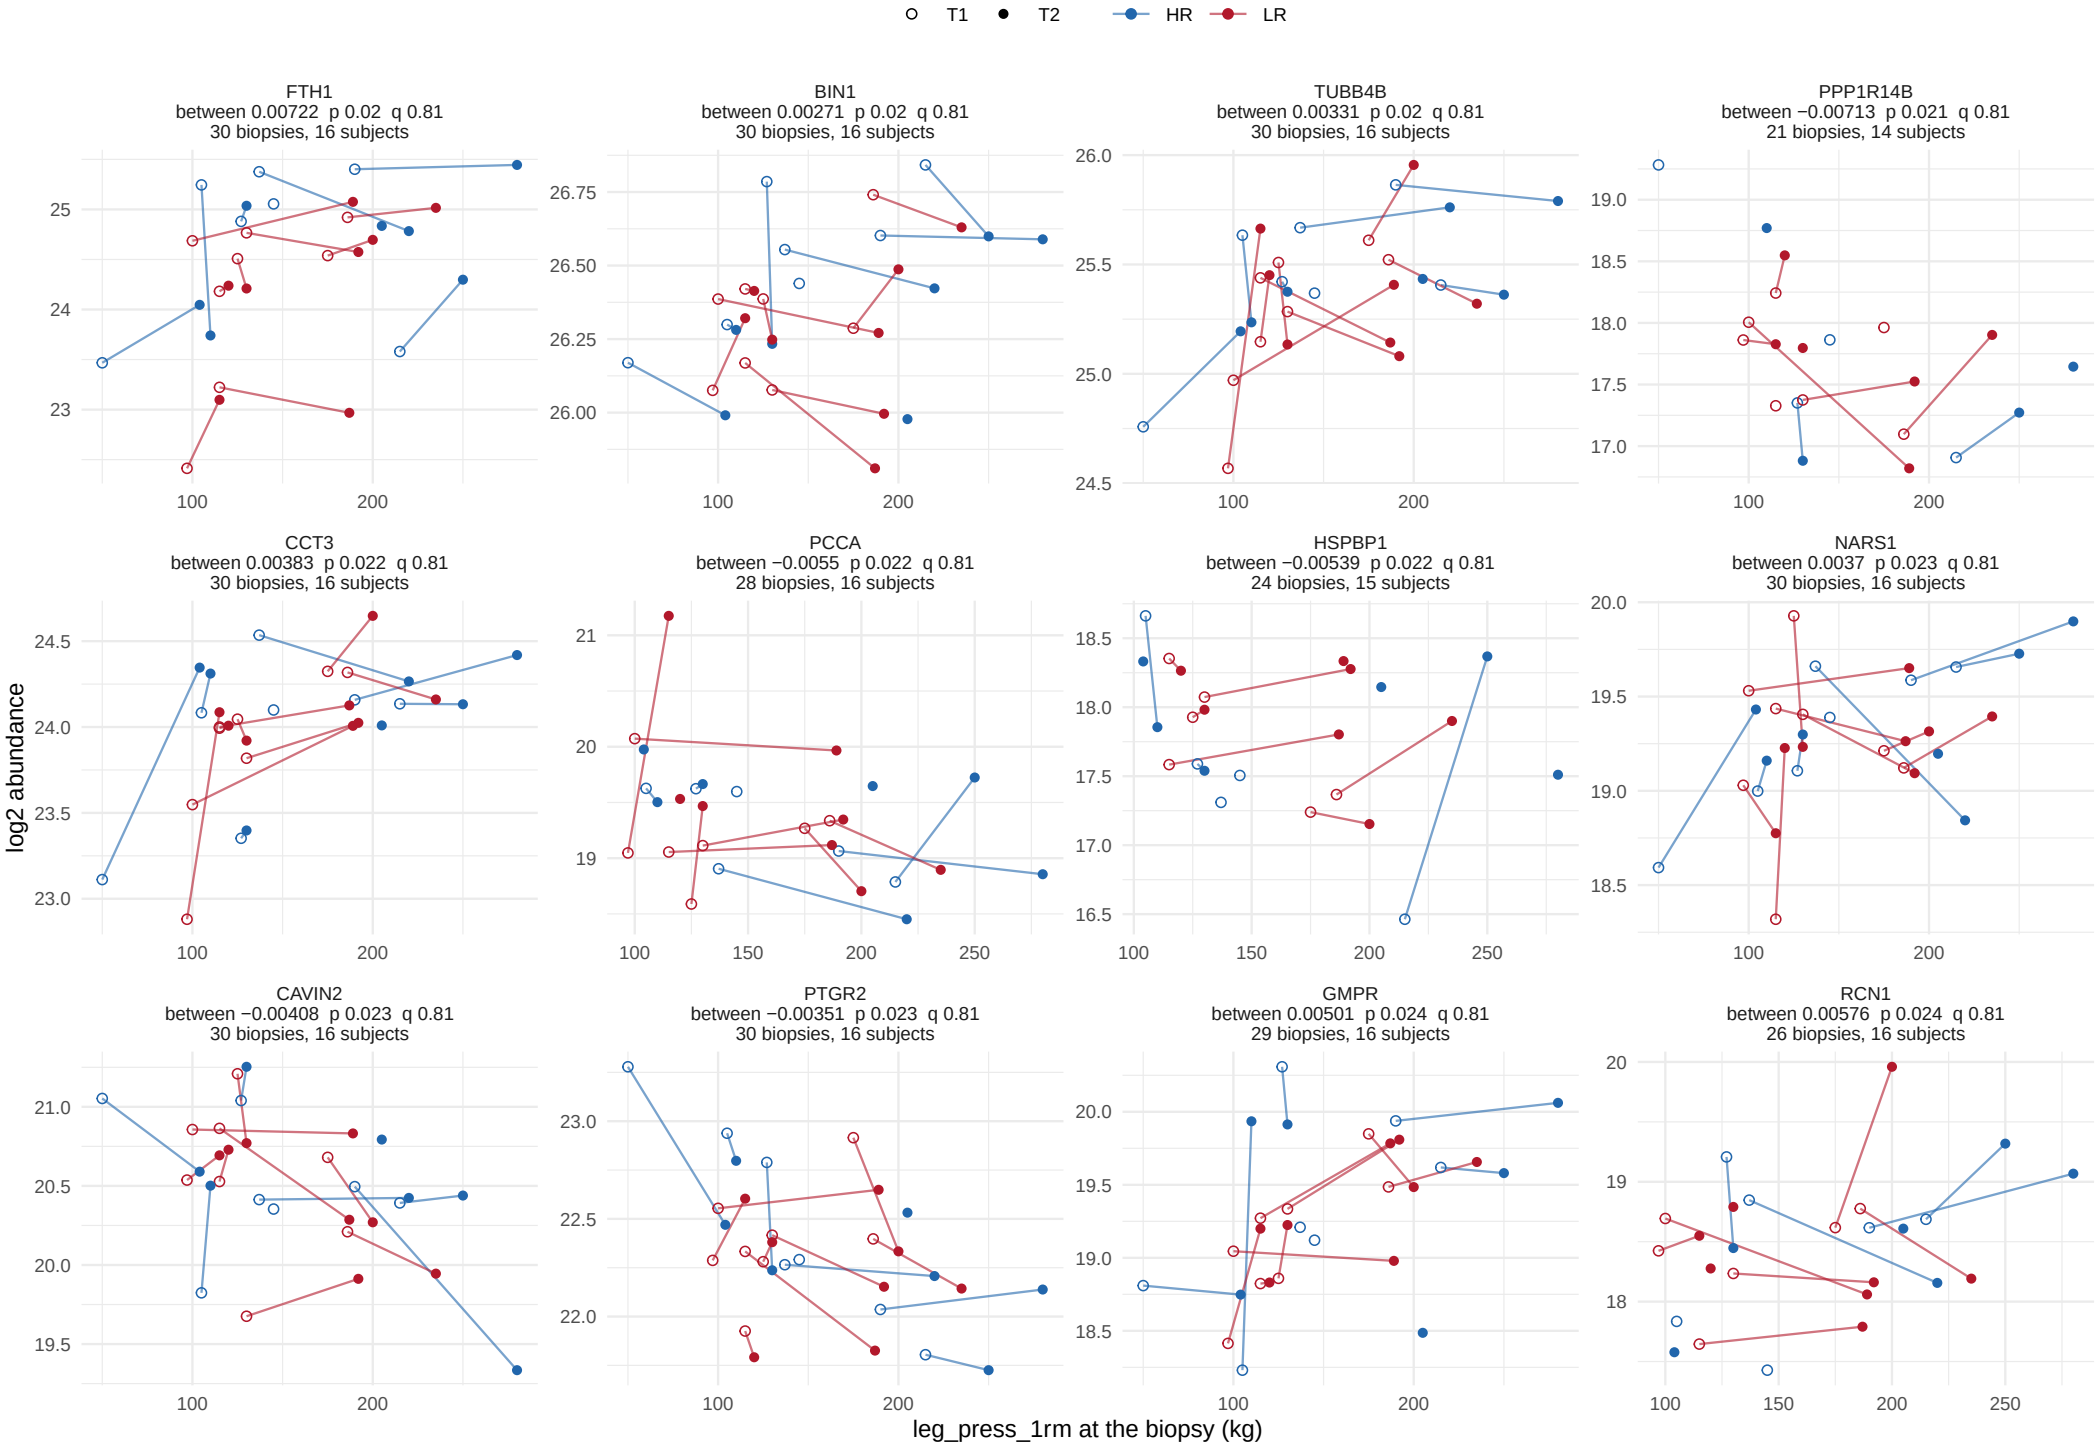

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_press_1rm, between−person term


83 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 5 of 7.

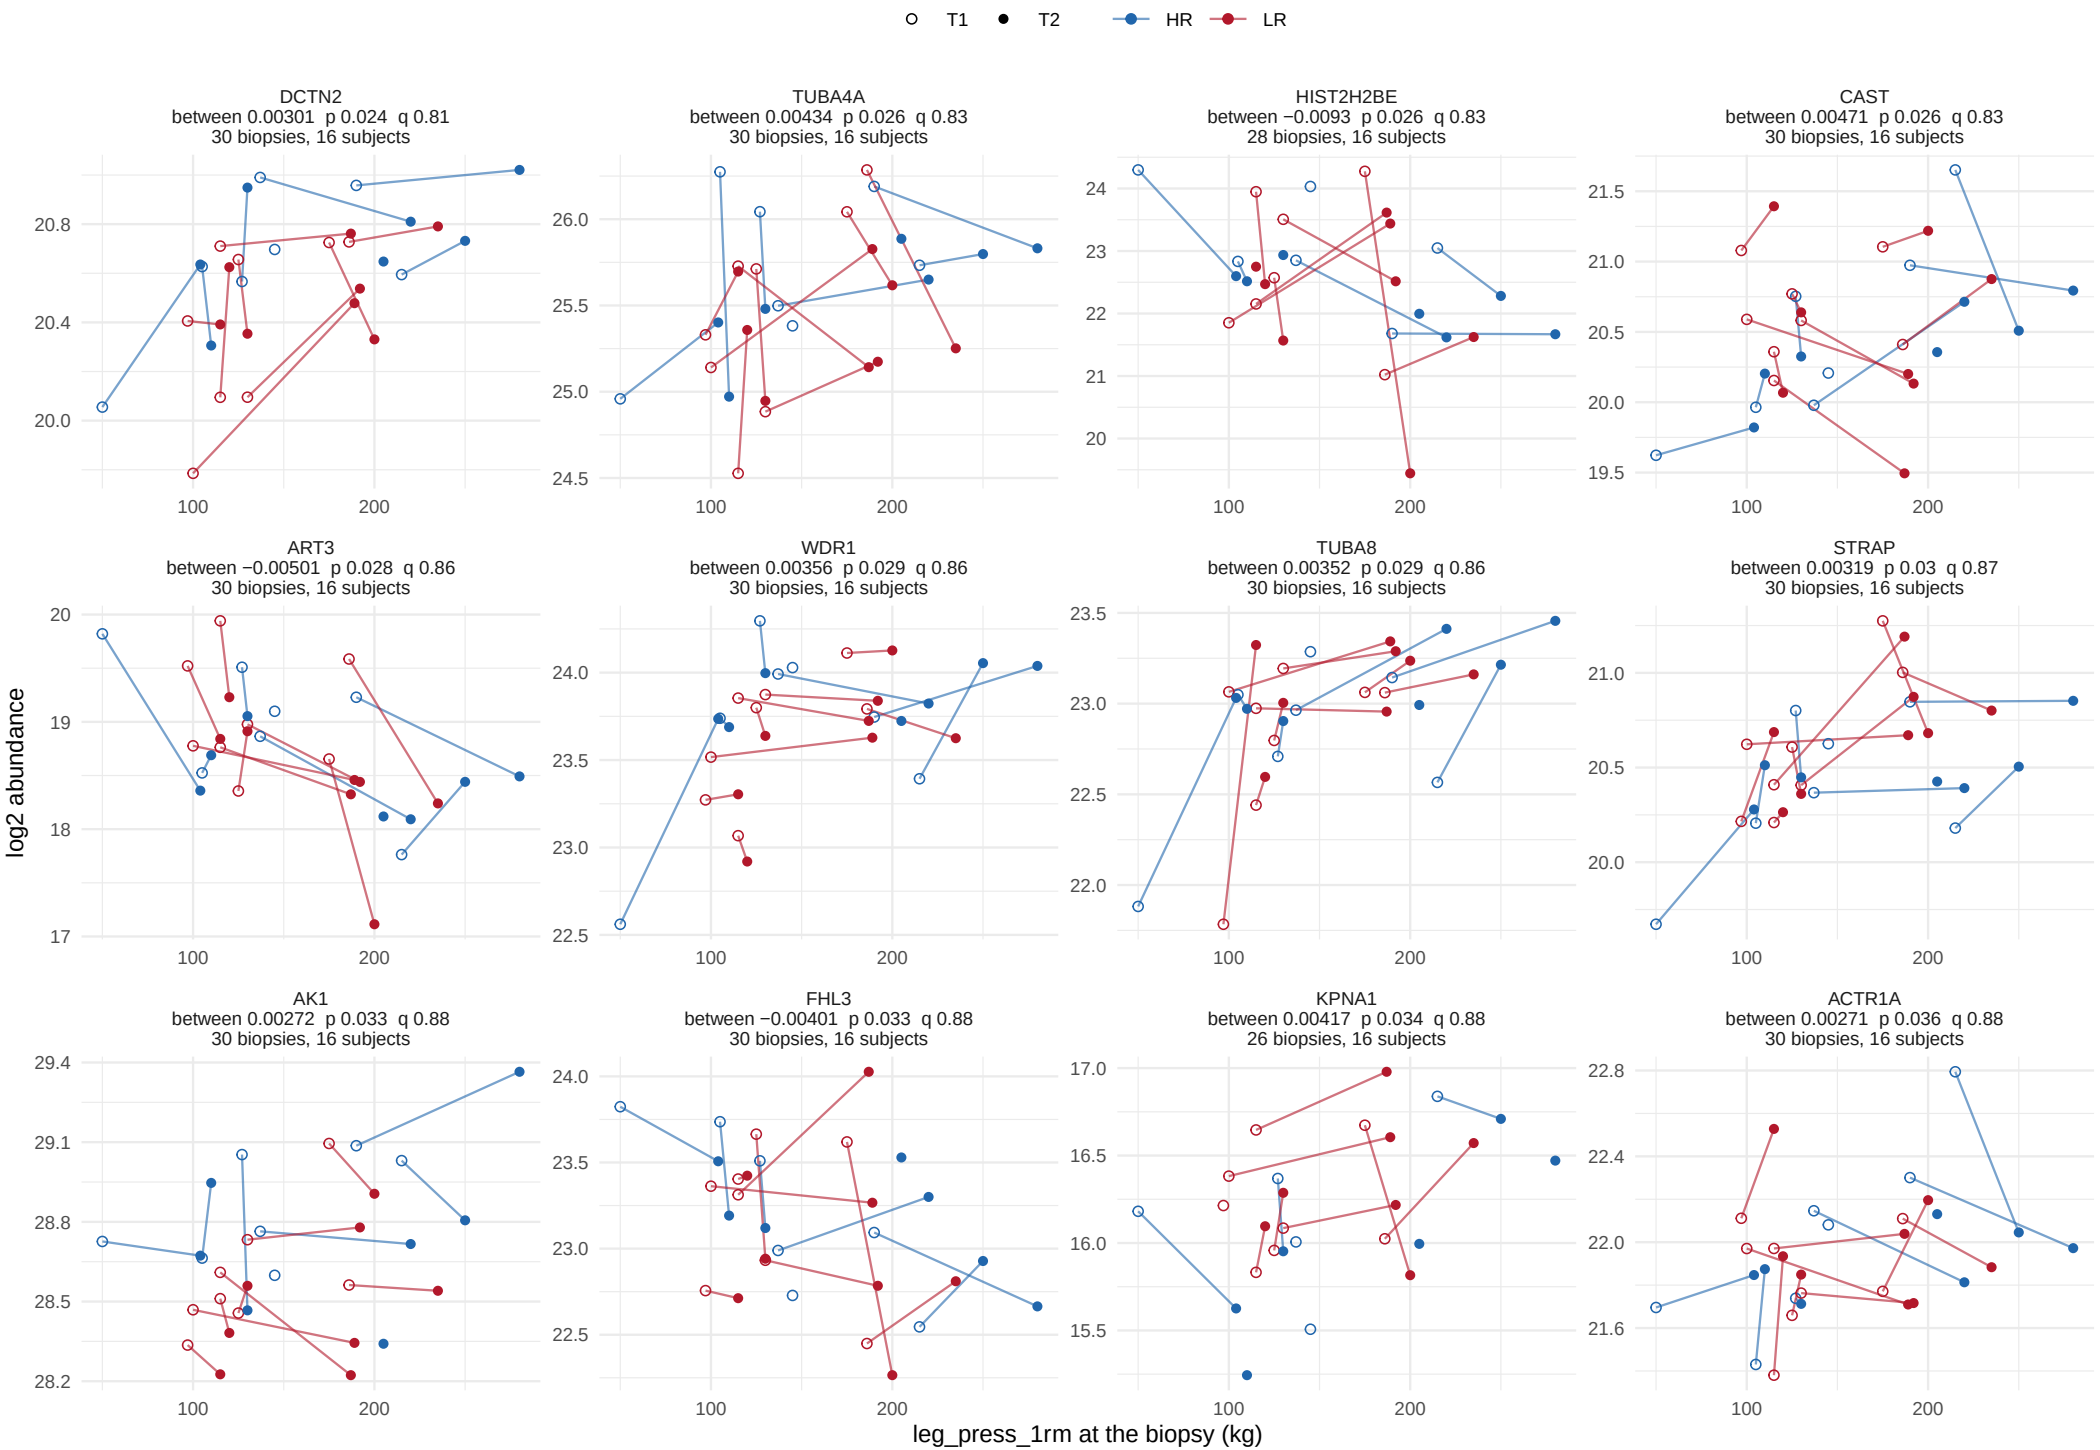

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_press_1rm, between−person term


83 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 6 of 7.

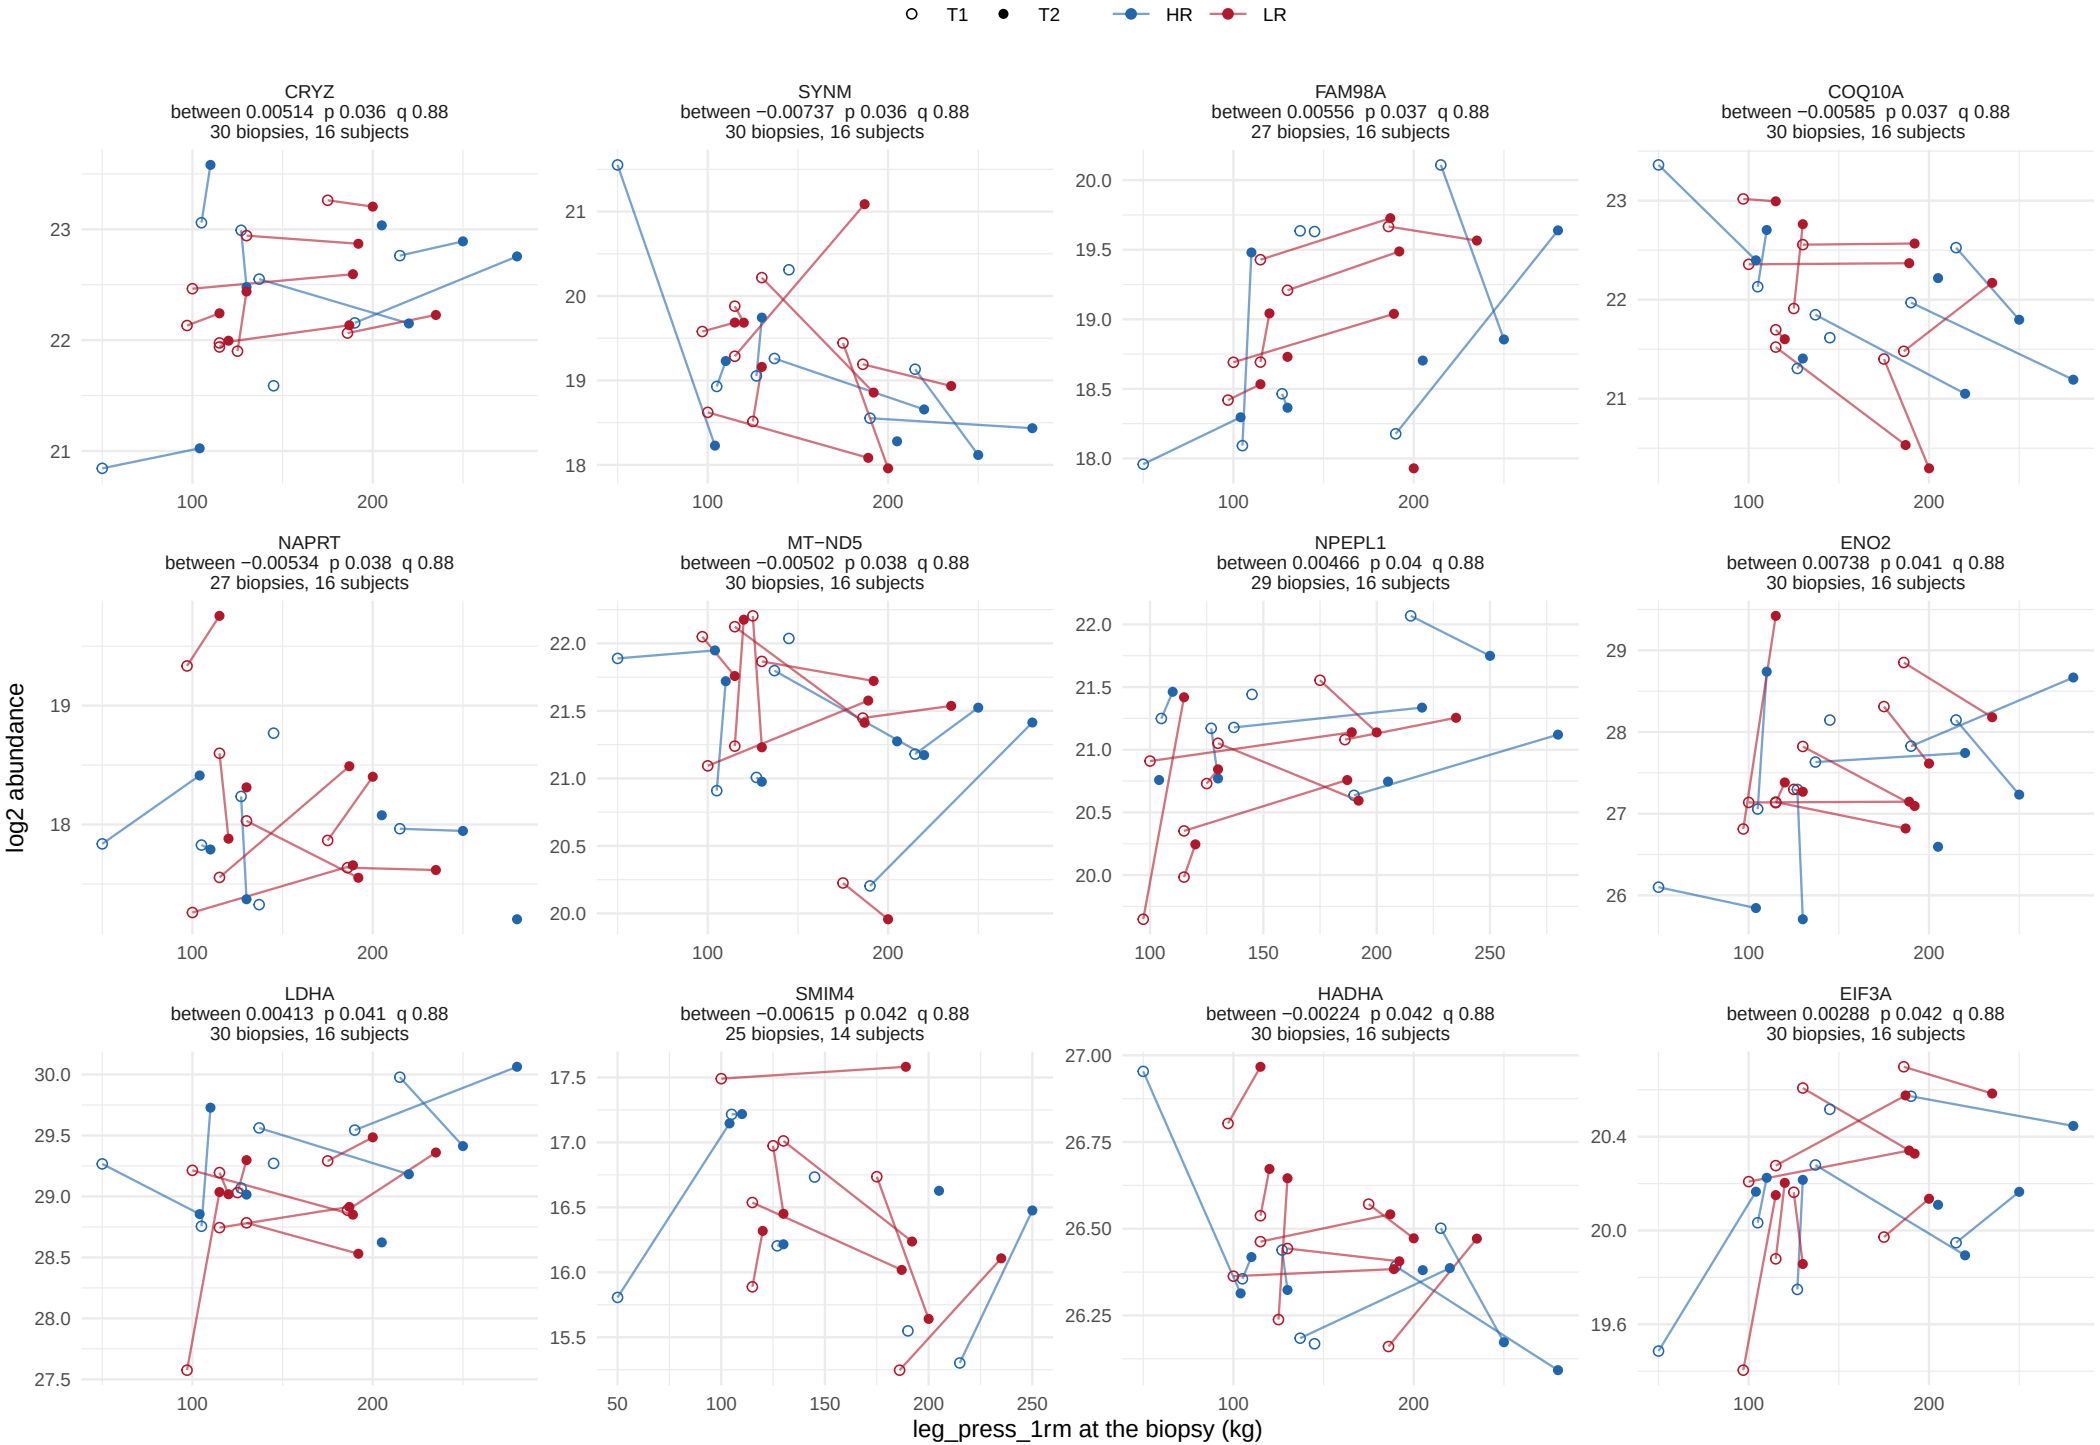

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_press_1rm, between−person term


83 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 7 of 7.

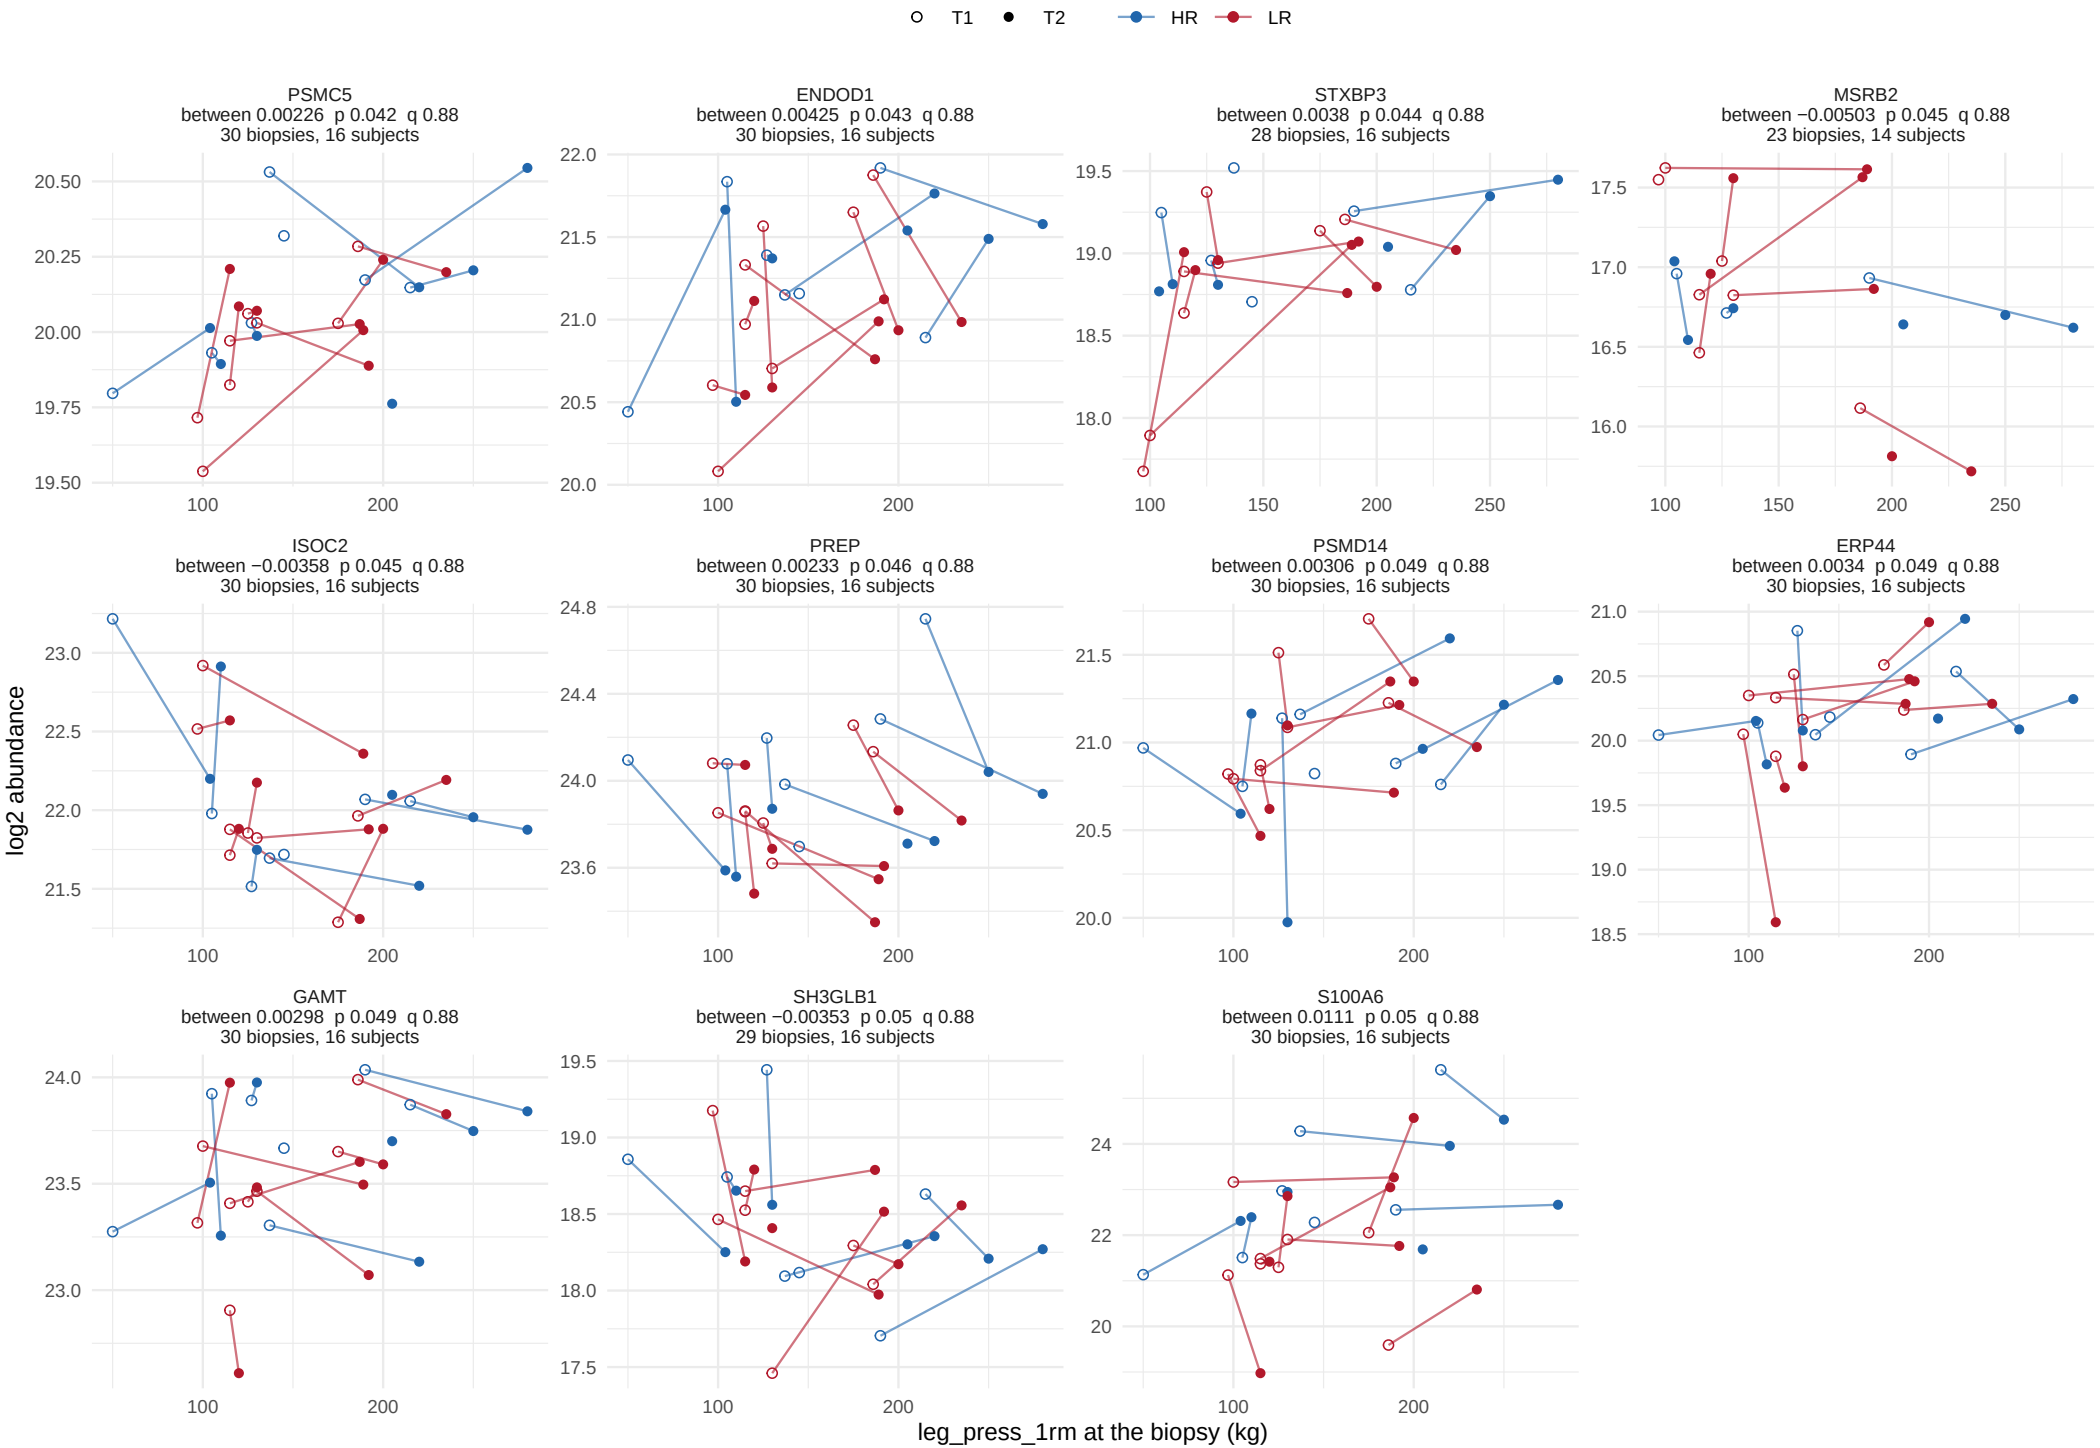

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_ext_1rm, within−person term


137 of 1615 proteins at p < 0.05, 0 at BH < 0.05. Page 1 of 12.

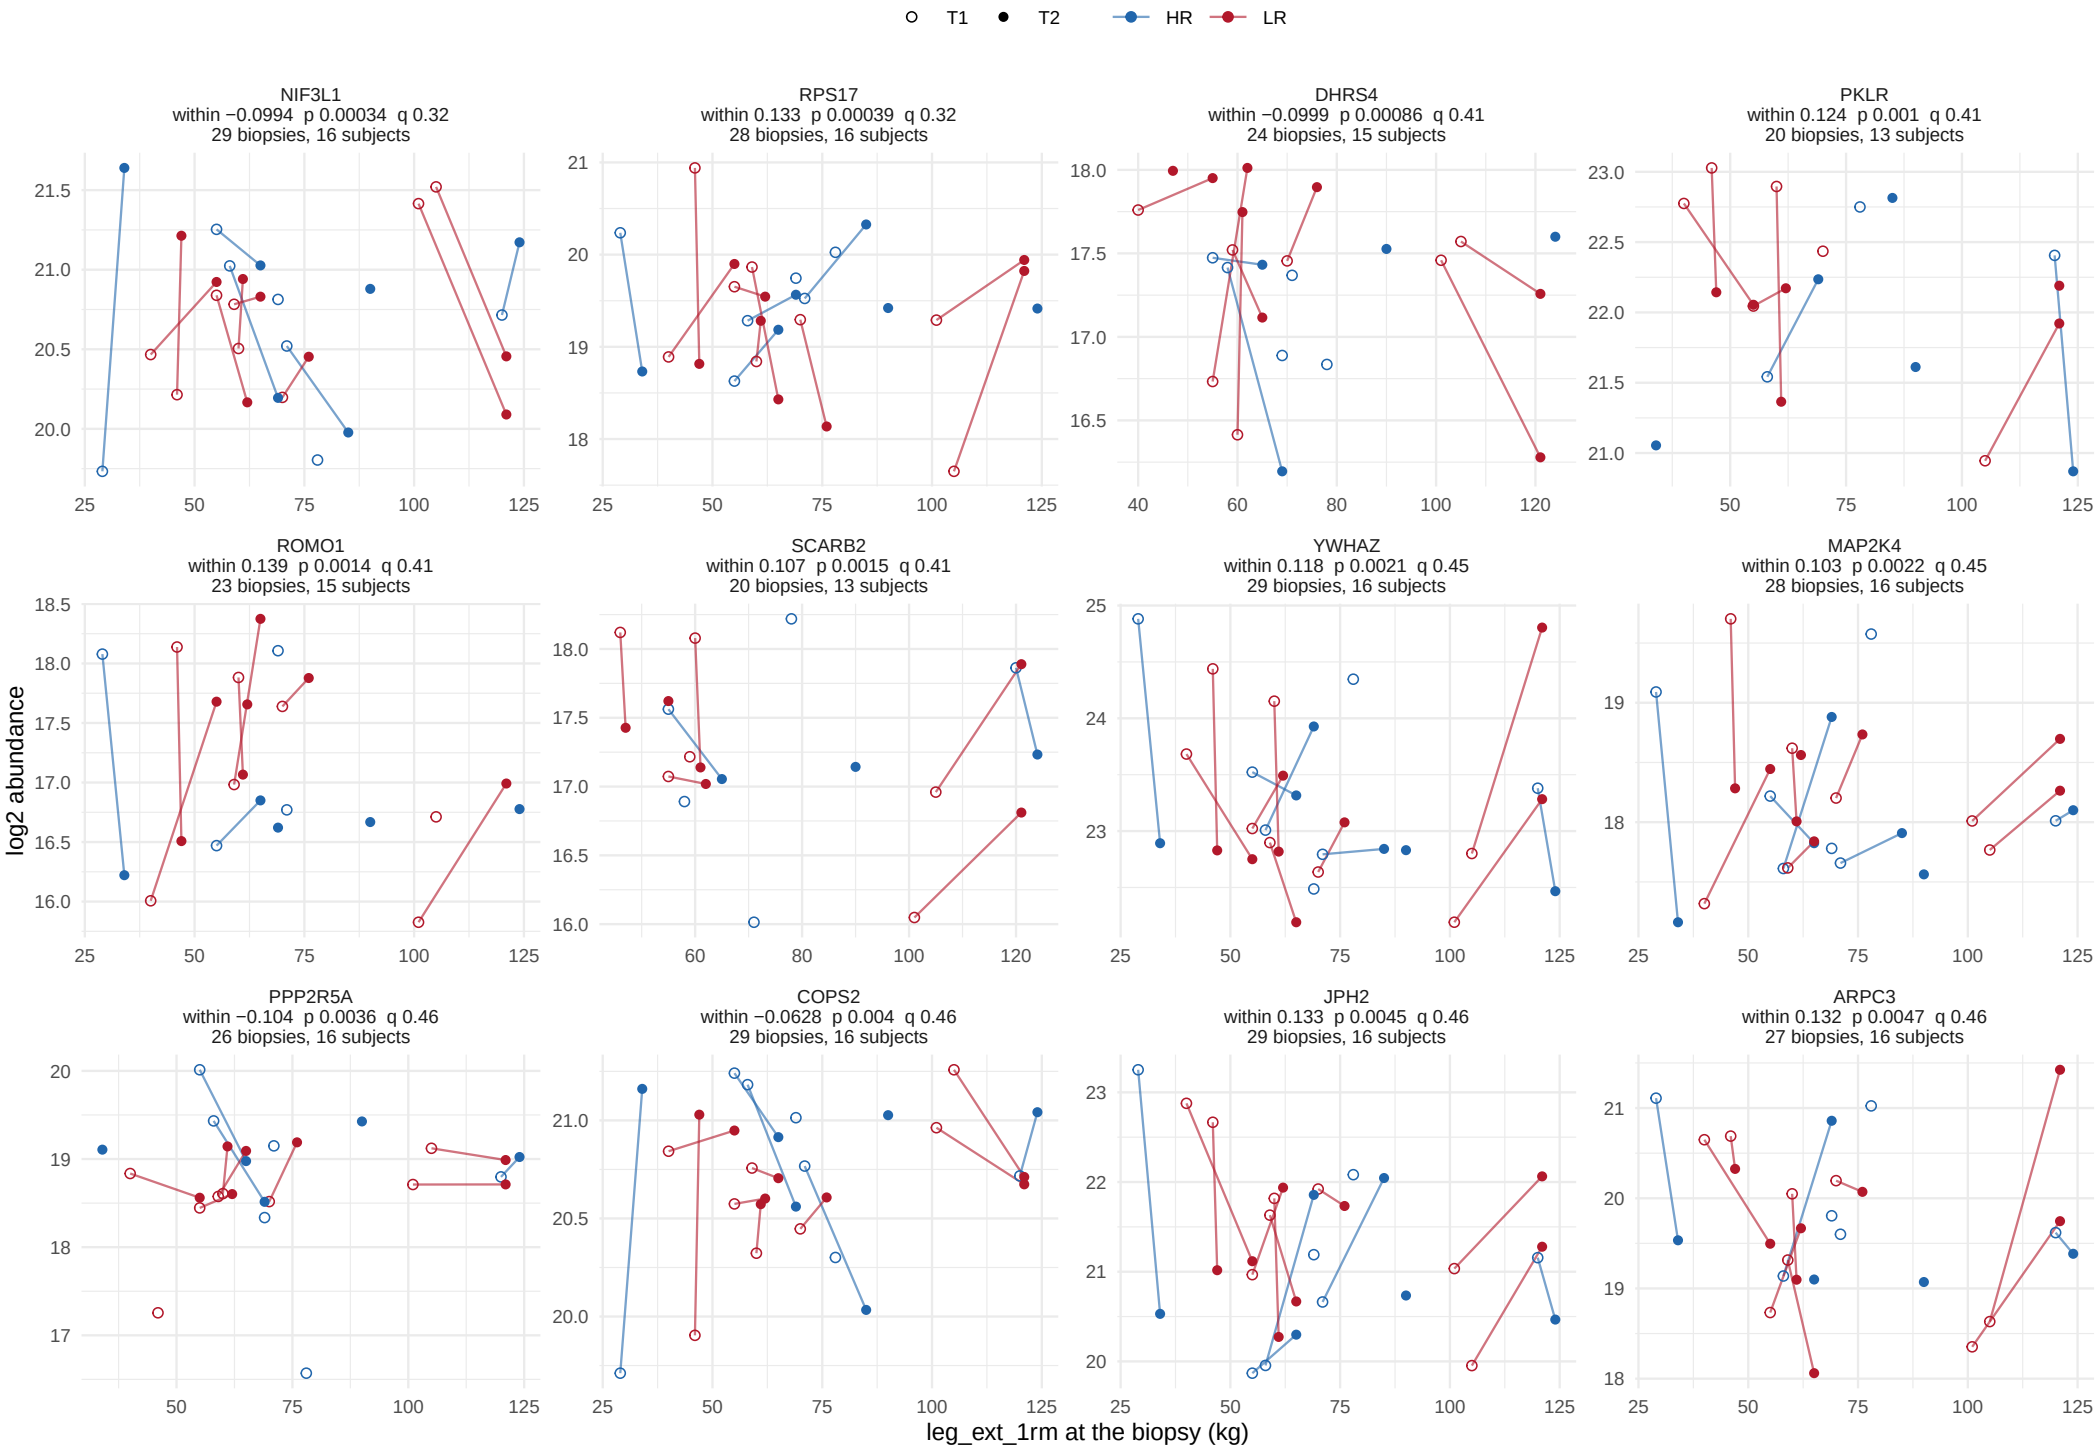

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_ext_1rm, within−person term


137 of 1615 proteins at p < 0.05, 0 at BH < 0.05. Page 2 of 12.

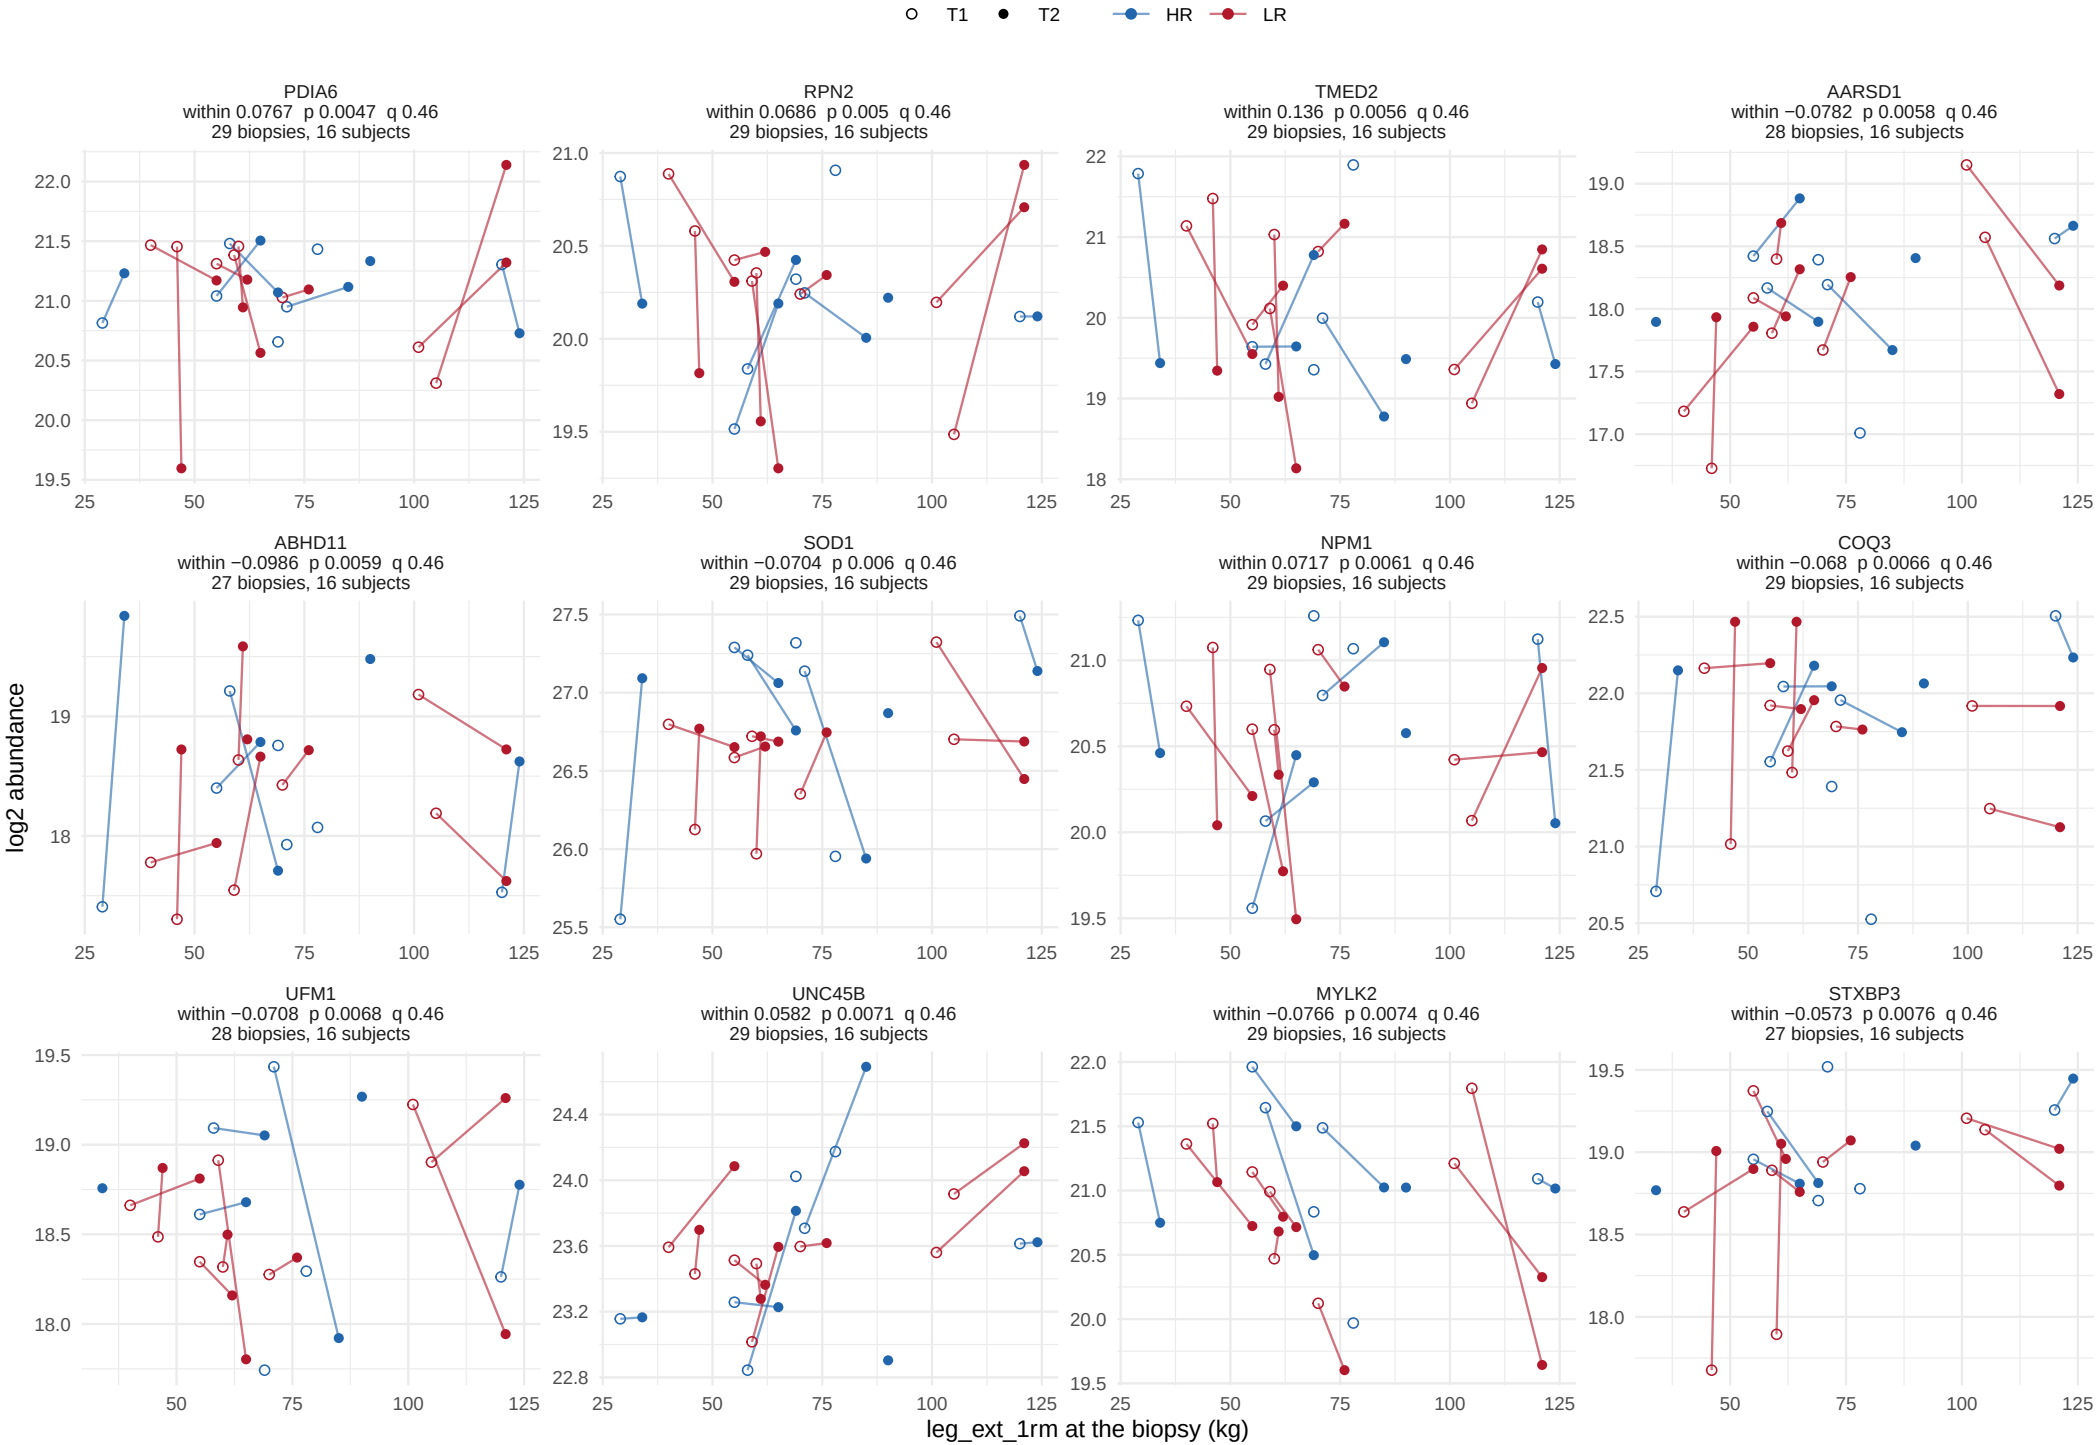

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_ext_1rm, within−person term


137 of 1615 proteins at p < 0.05, 0 at BH < 0.05. Page 3 of 12.

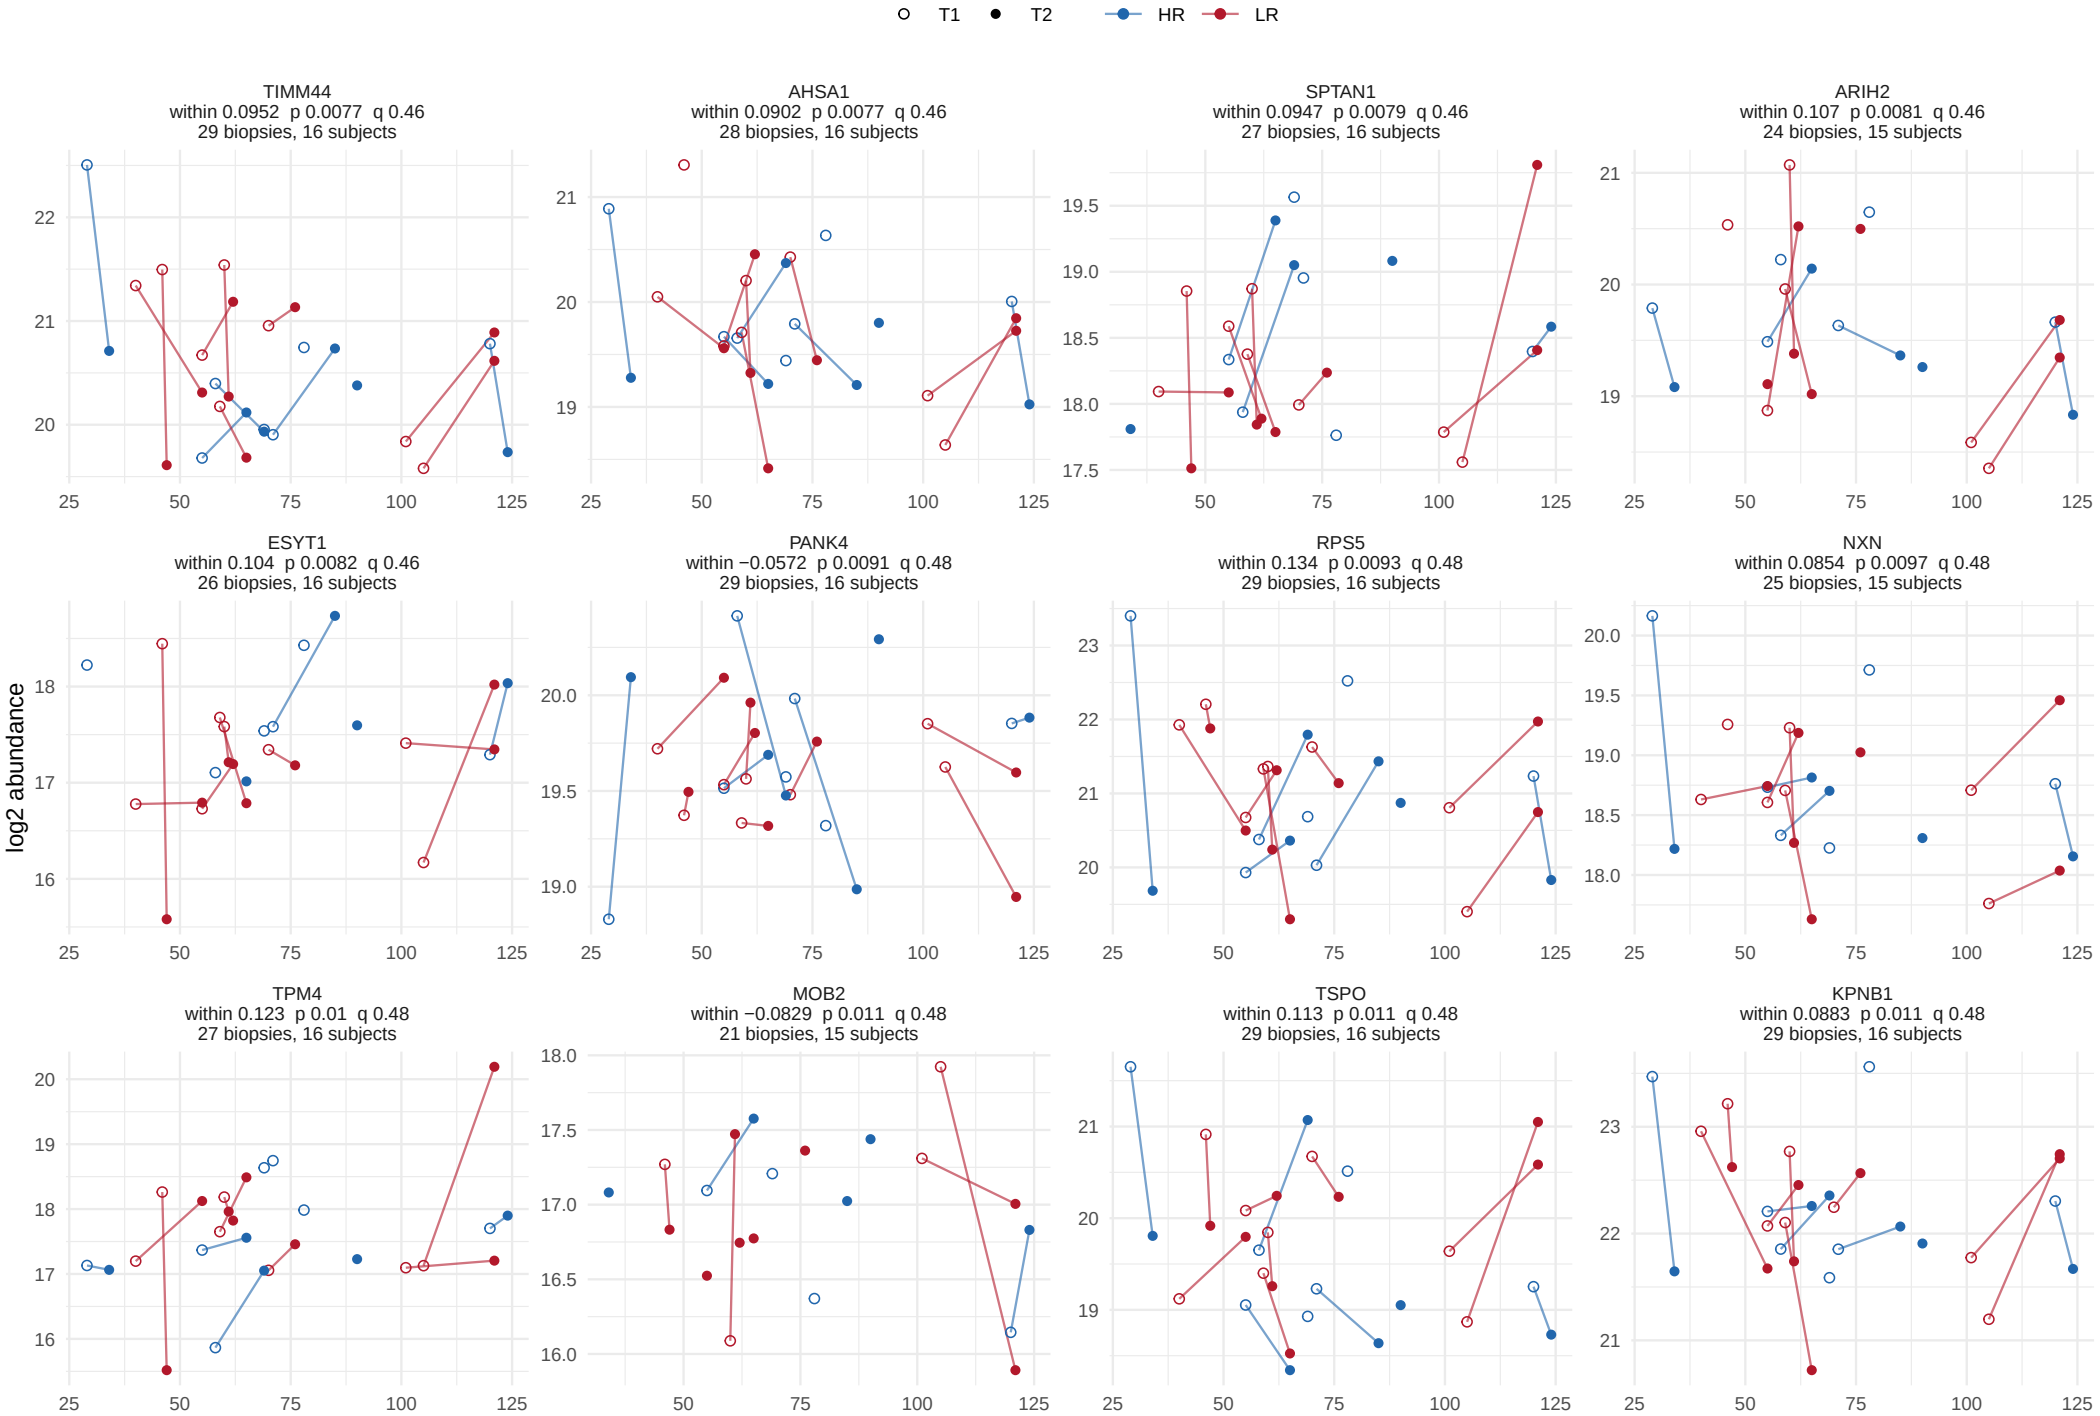

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_ext_1rm, within−person term


137 of 1615 proteins at p < 0.05, 0 at BH < 0.05. Page 4 of 12.

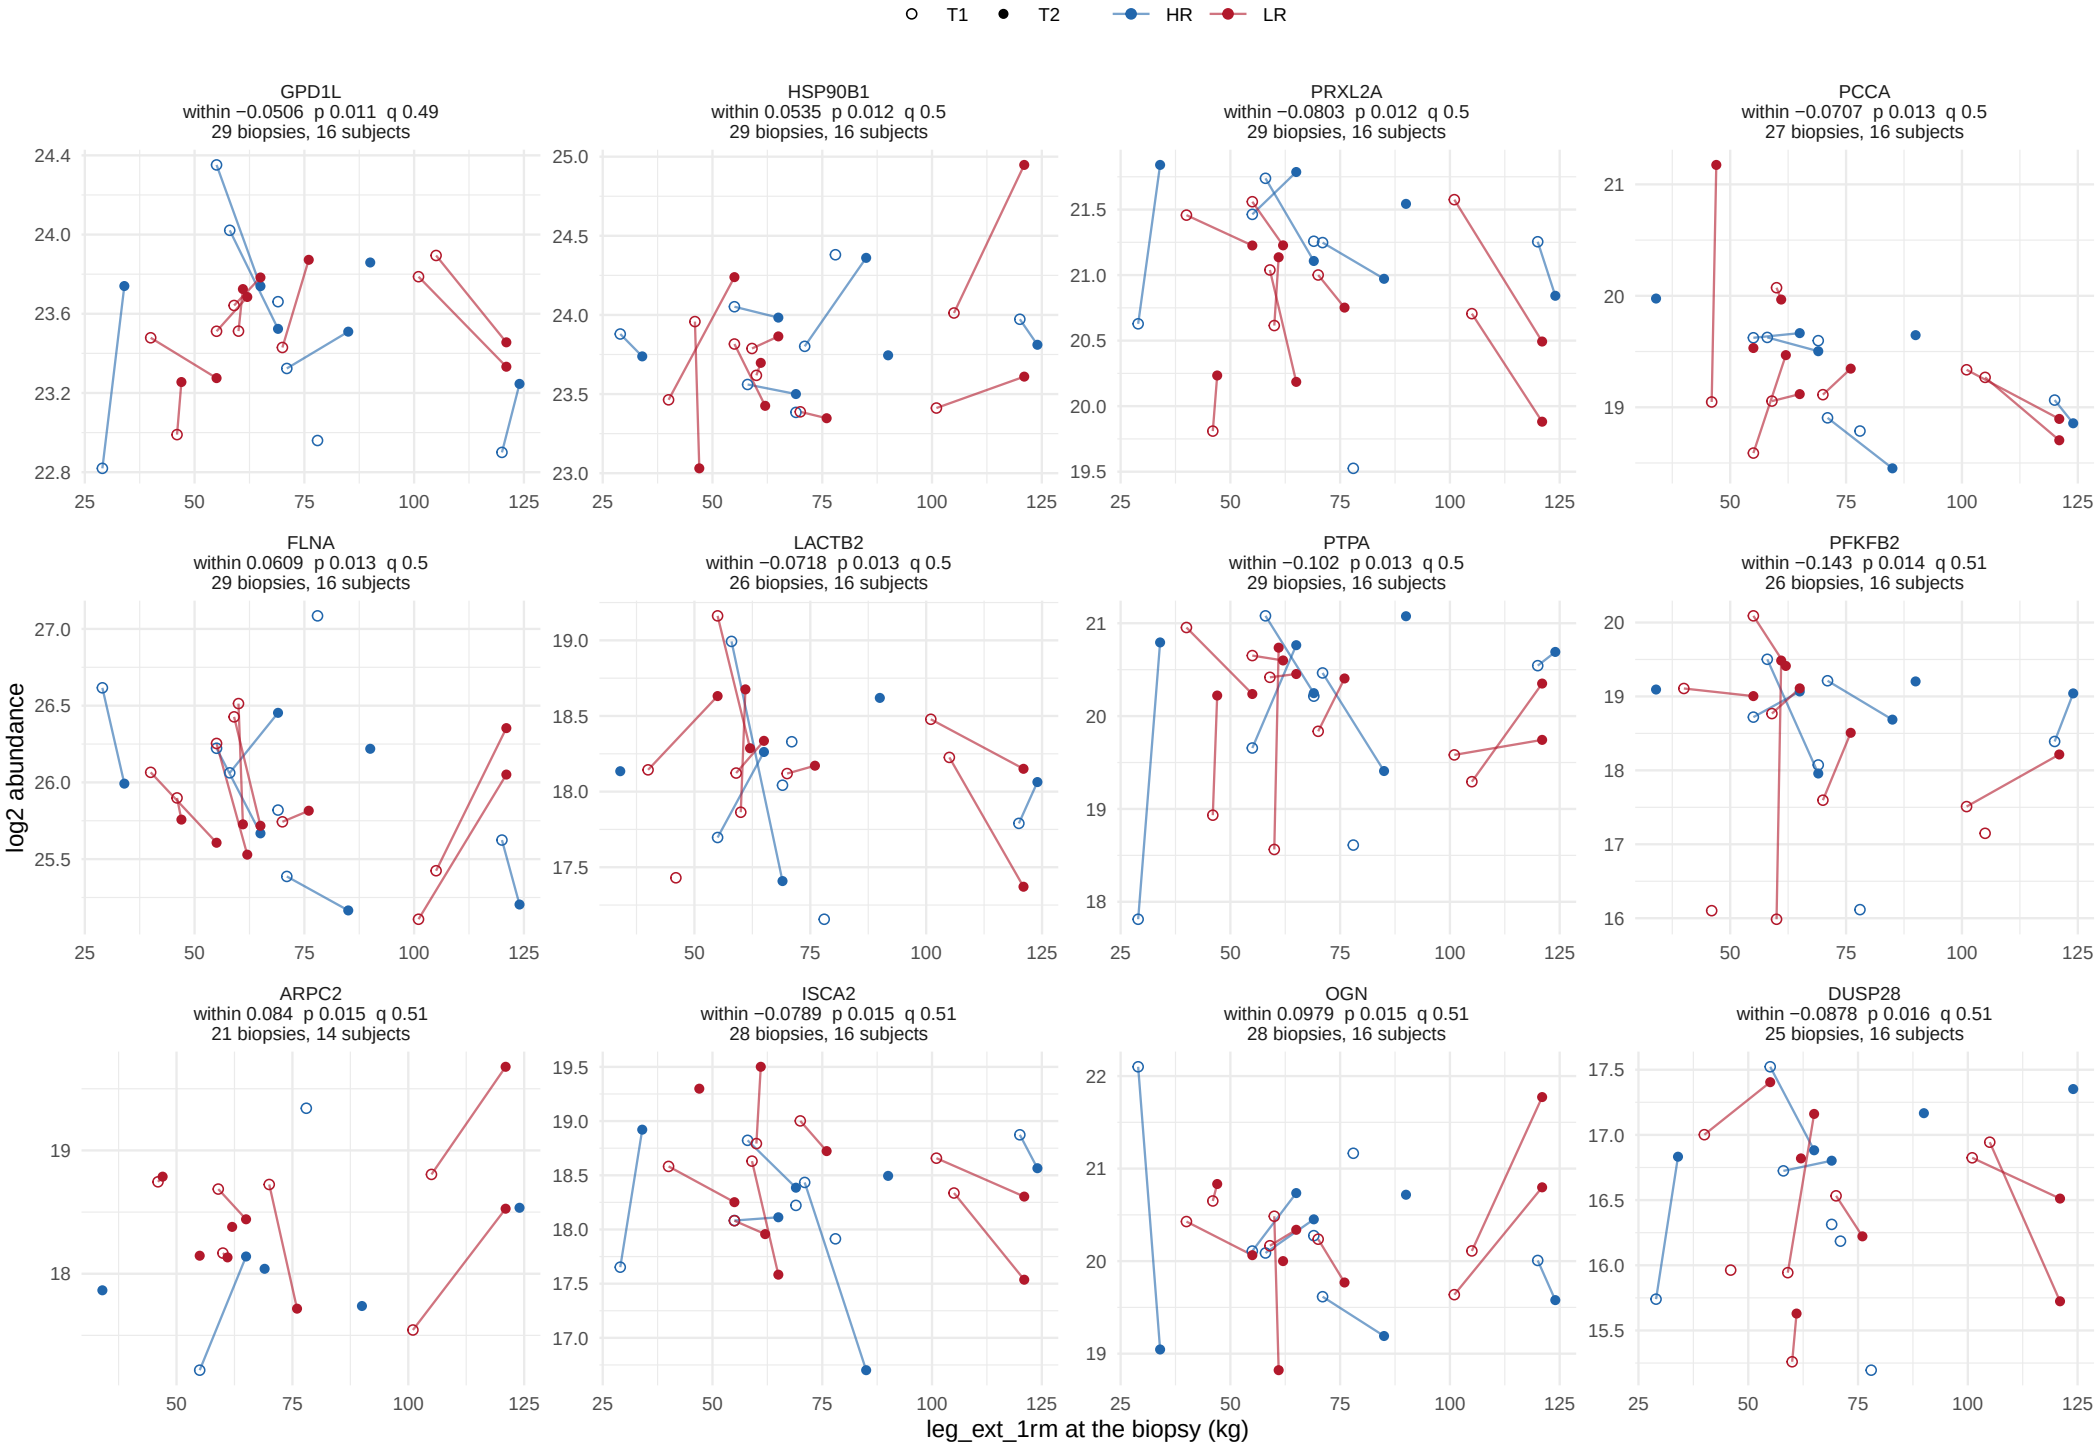

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_ext_1rm, within−person term


137 of 1615 proteins at p < 0.05, 0 at BH < 0.05. Page 5 of 12.

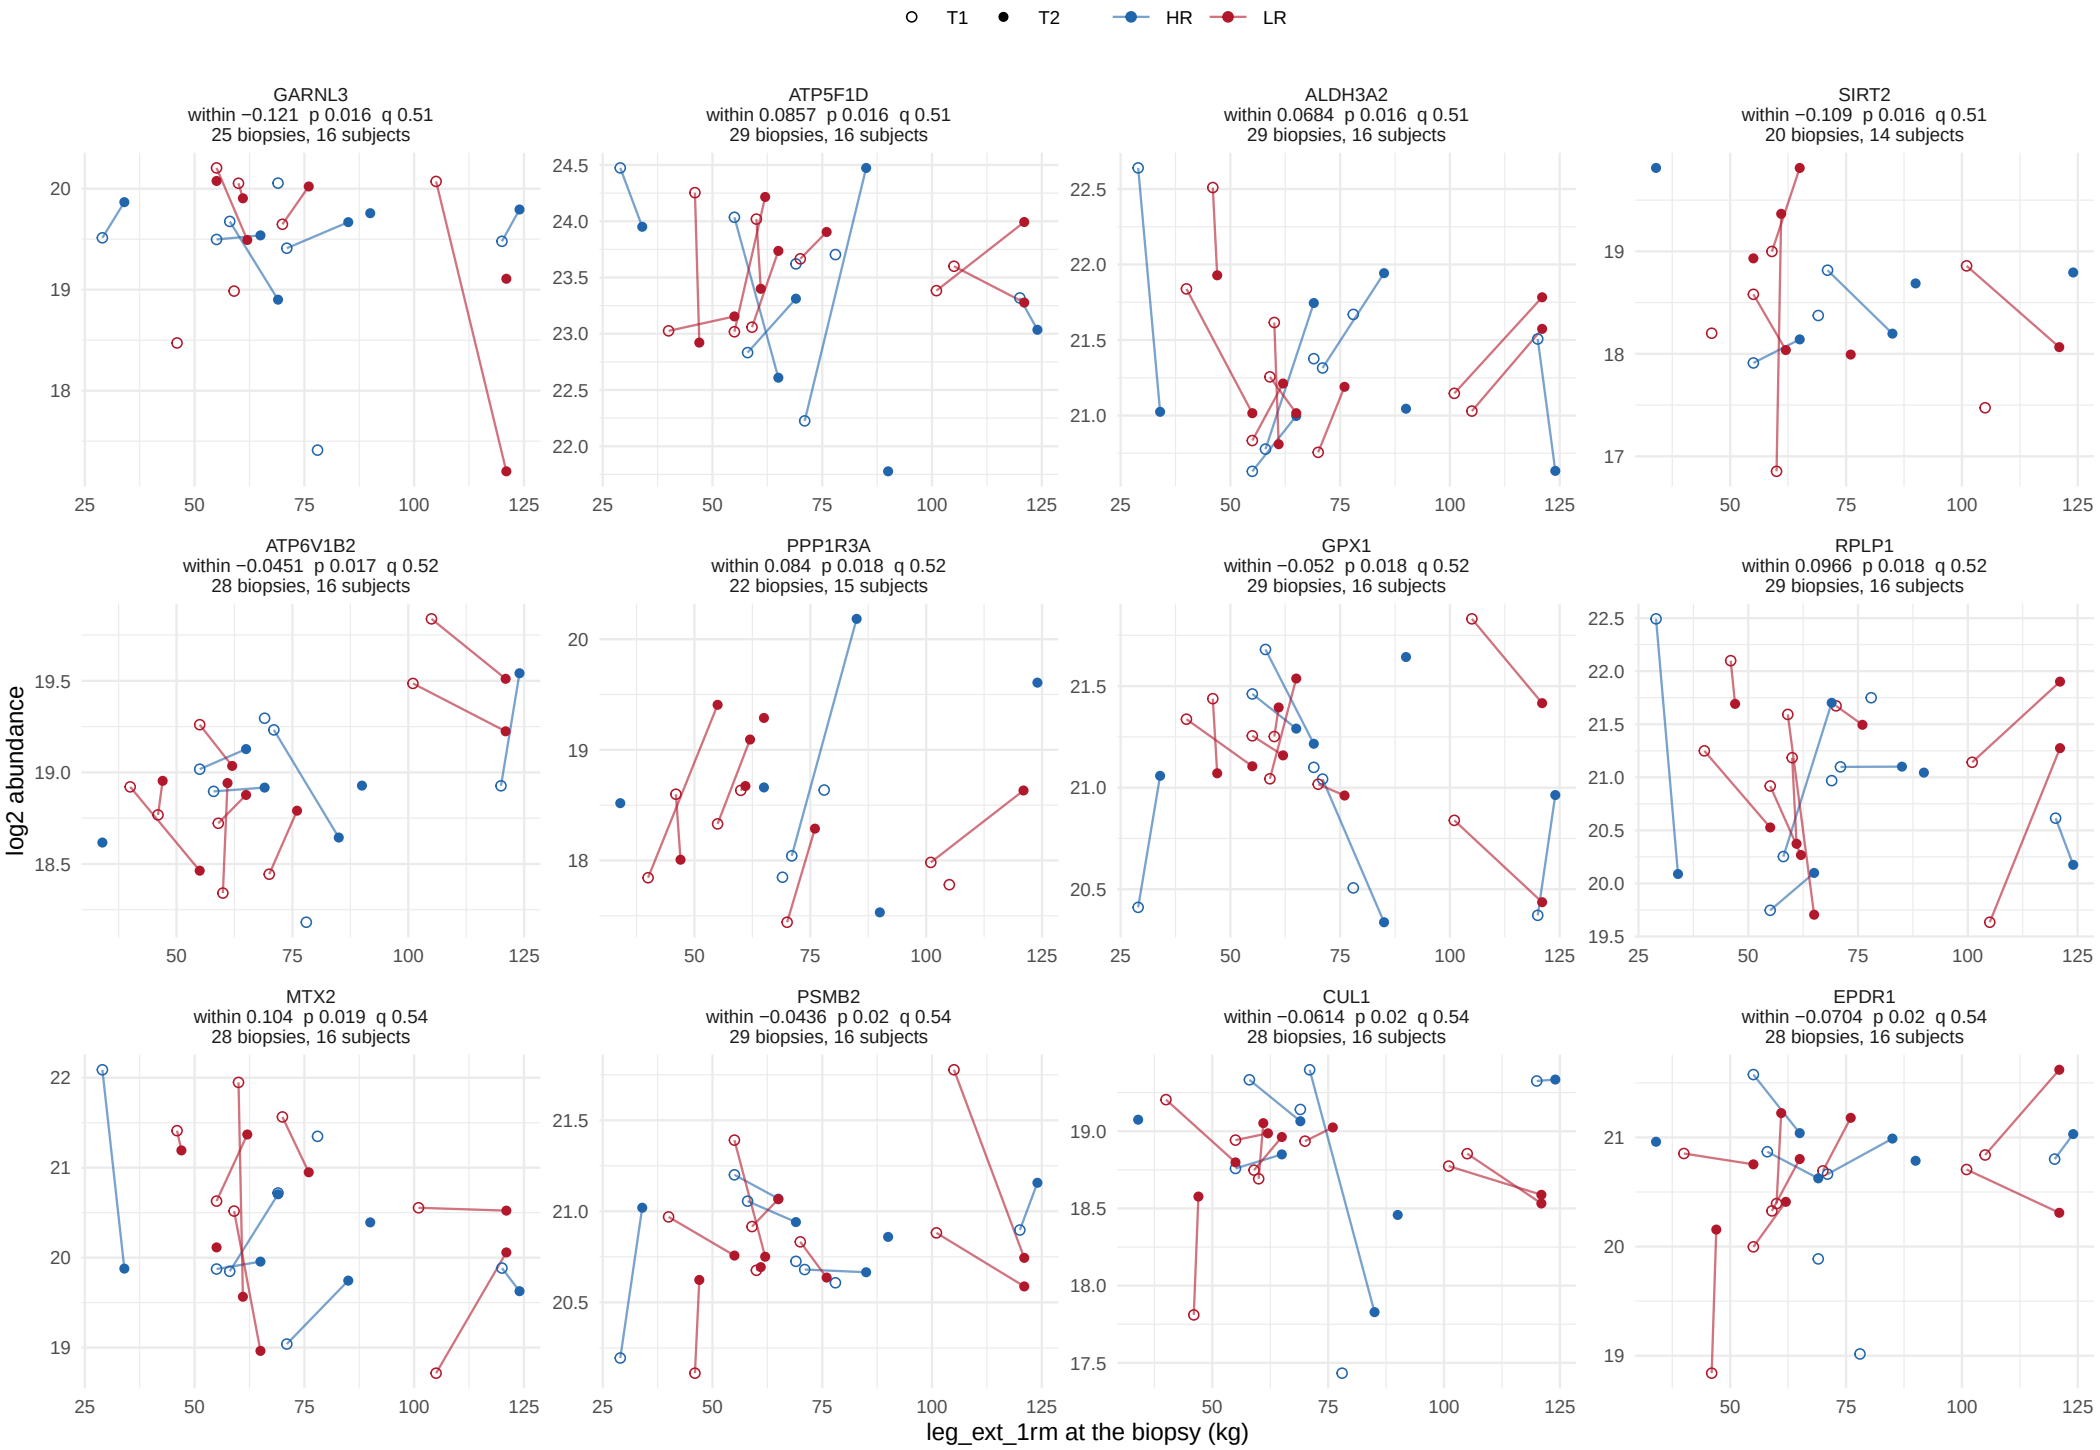

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_ext_1rm, within−person term


137 of 1615 proteins at p < 0.05, 0 at BH < 0.05. Page 6 of 12.

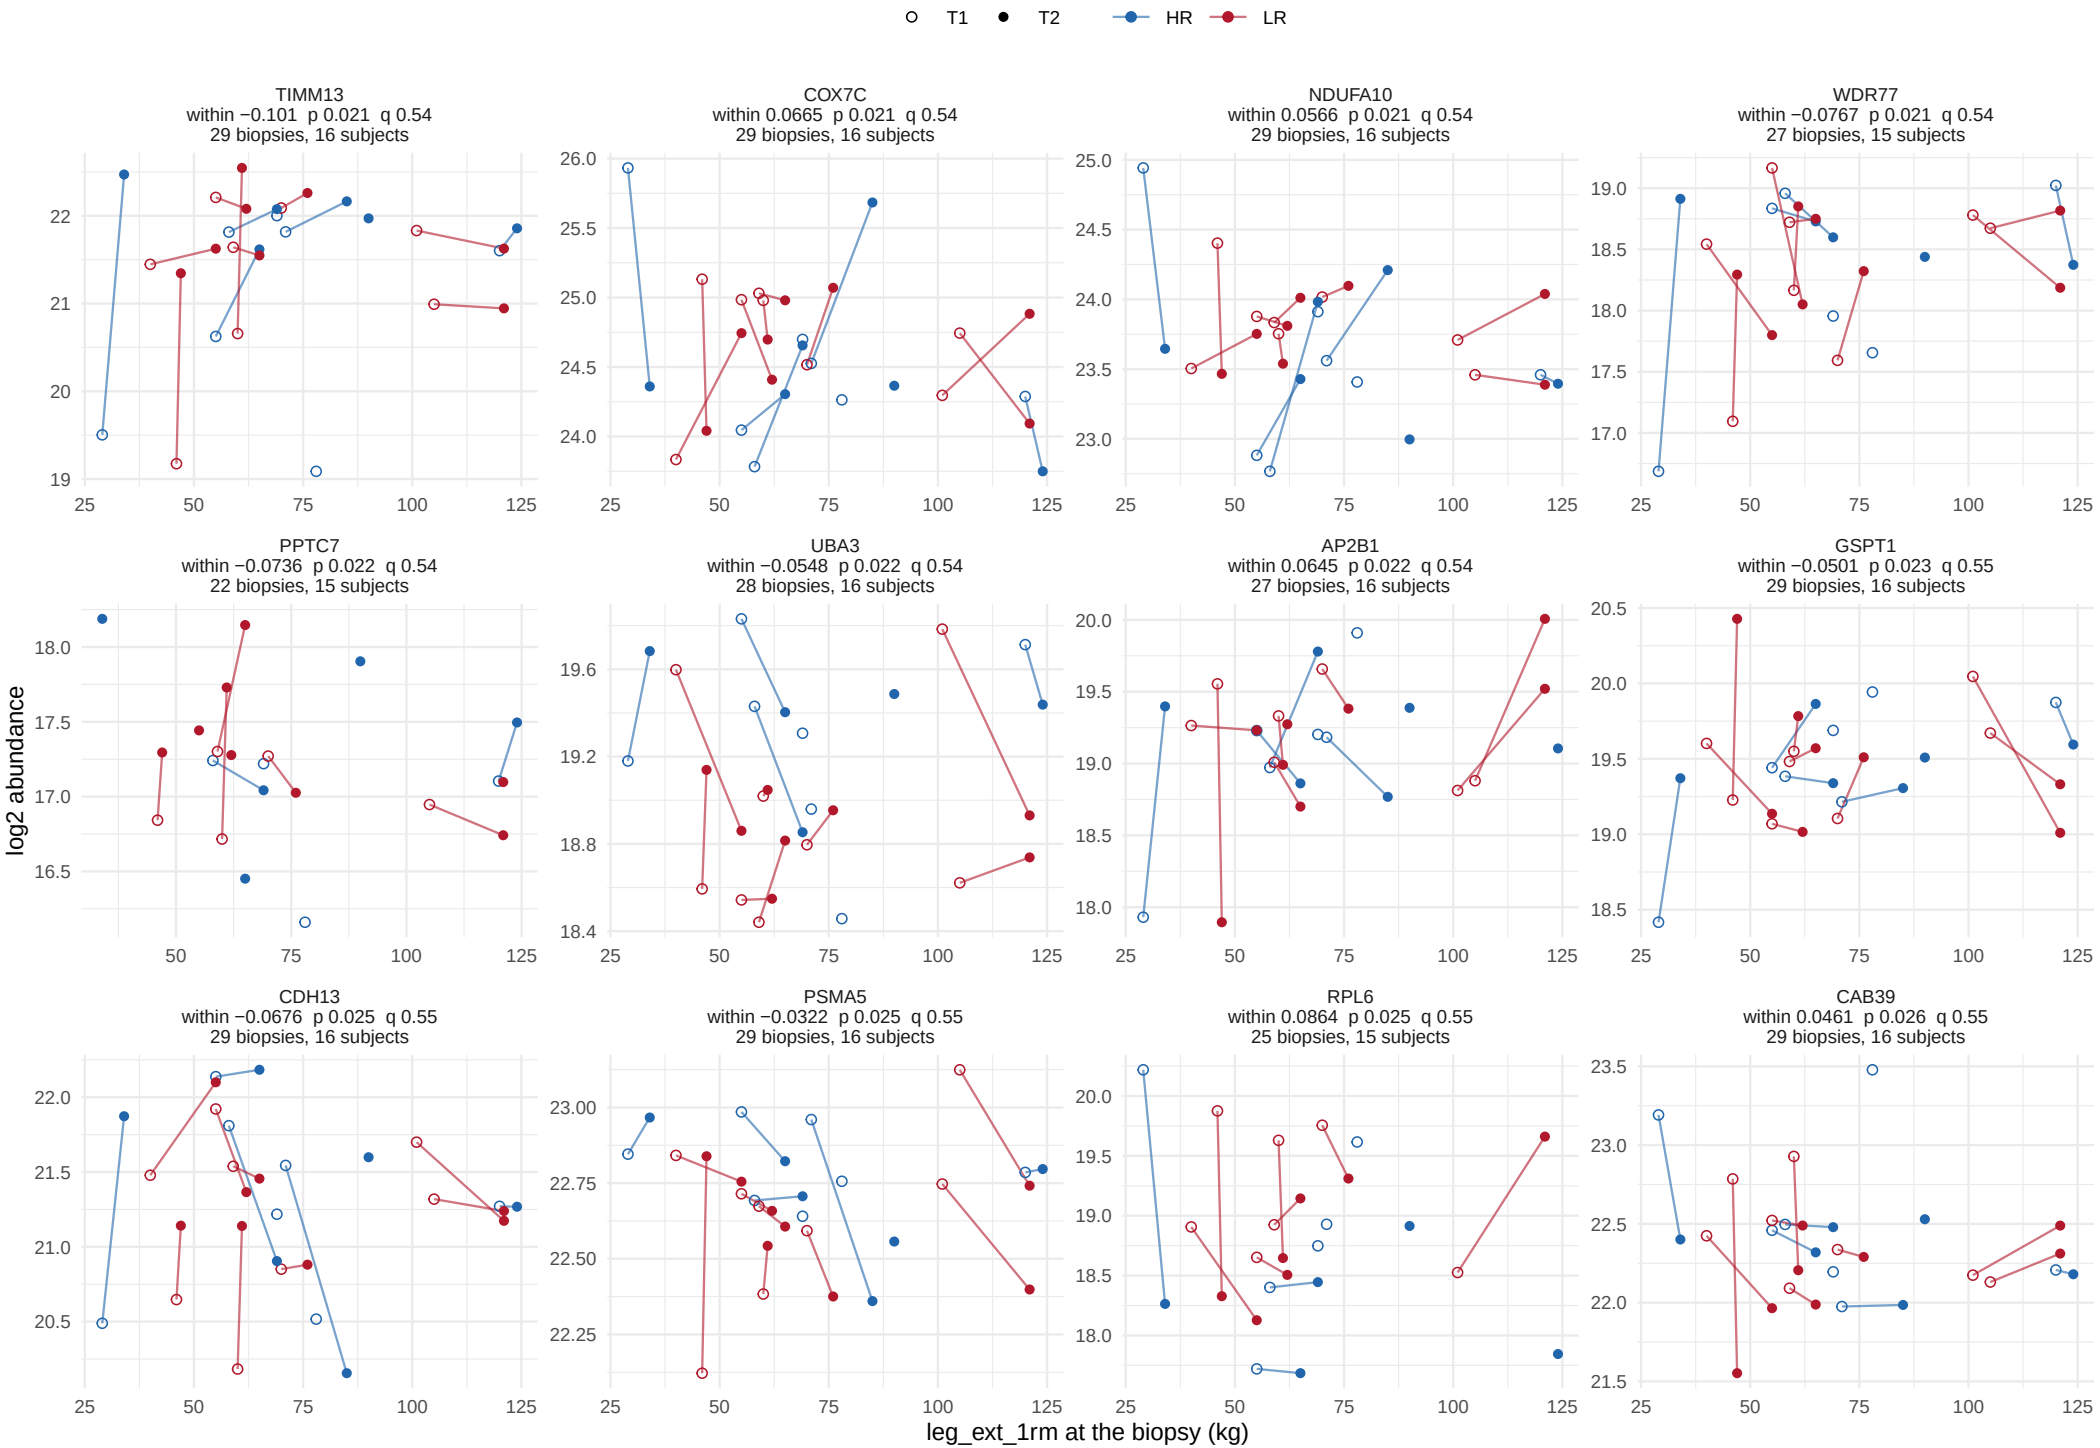

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_ext_1rm, within−person term


137 of 1615 proteins at p < 0.05, 0 at BH < 0.05. Page 7 of 12.

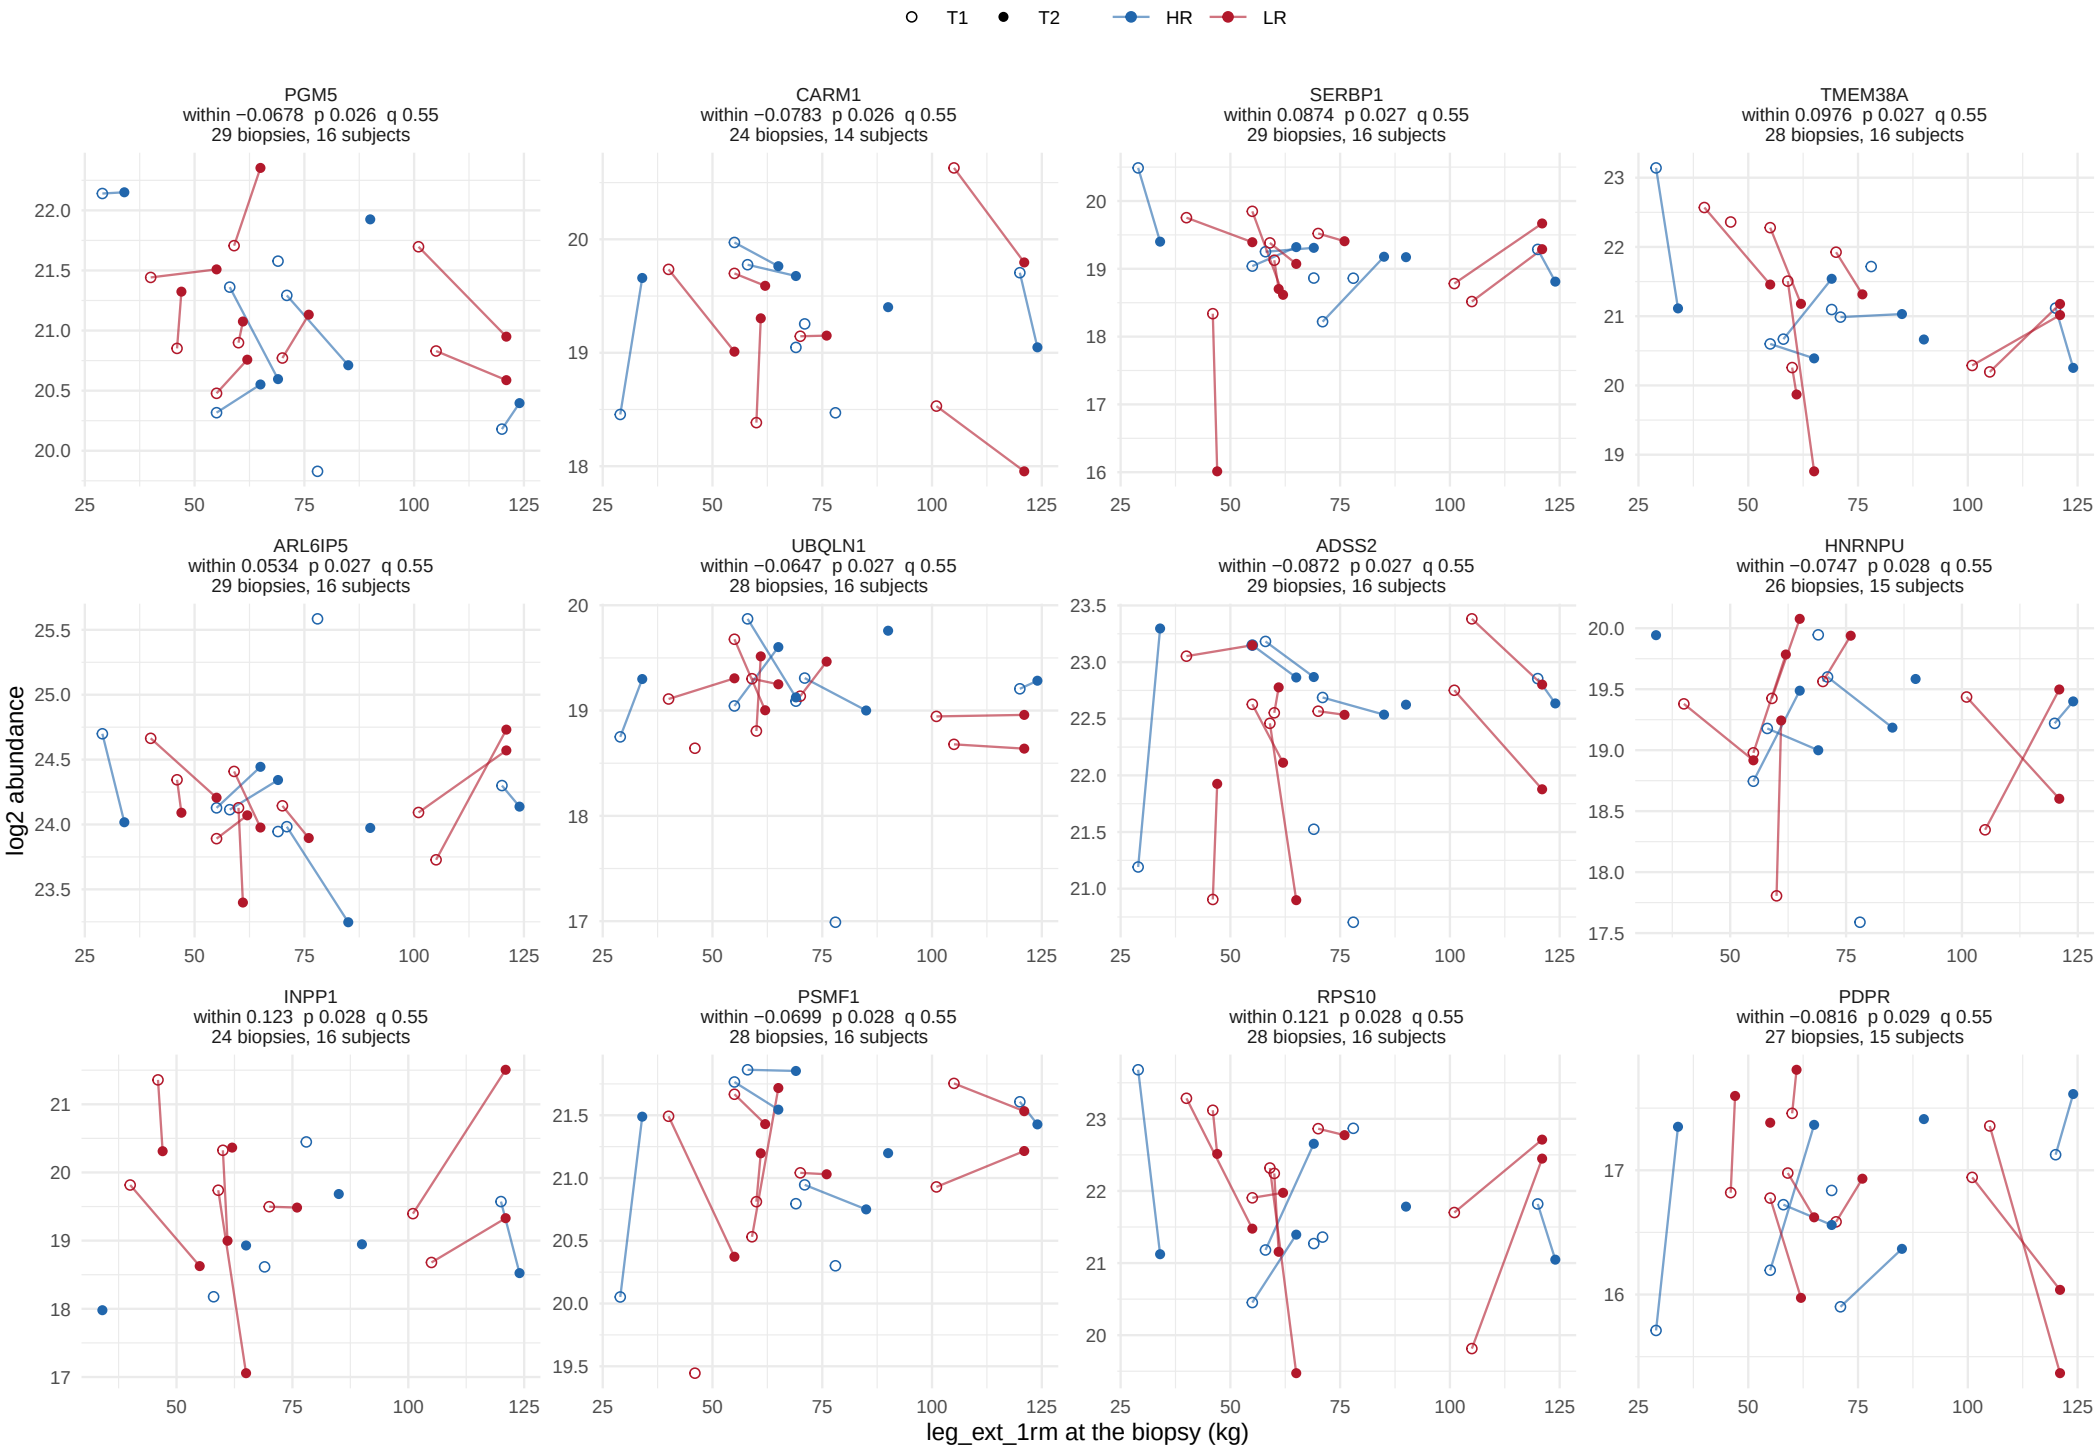

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_ext_1rm, within−person term


137 of 1615 proteins at p < 0.05, 0 at BH < 0.05. Page 8 of 12.

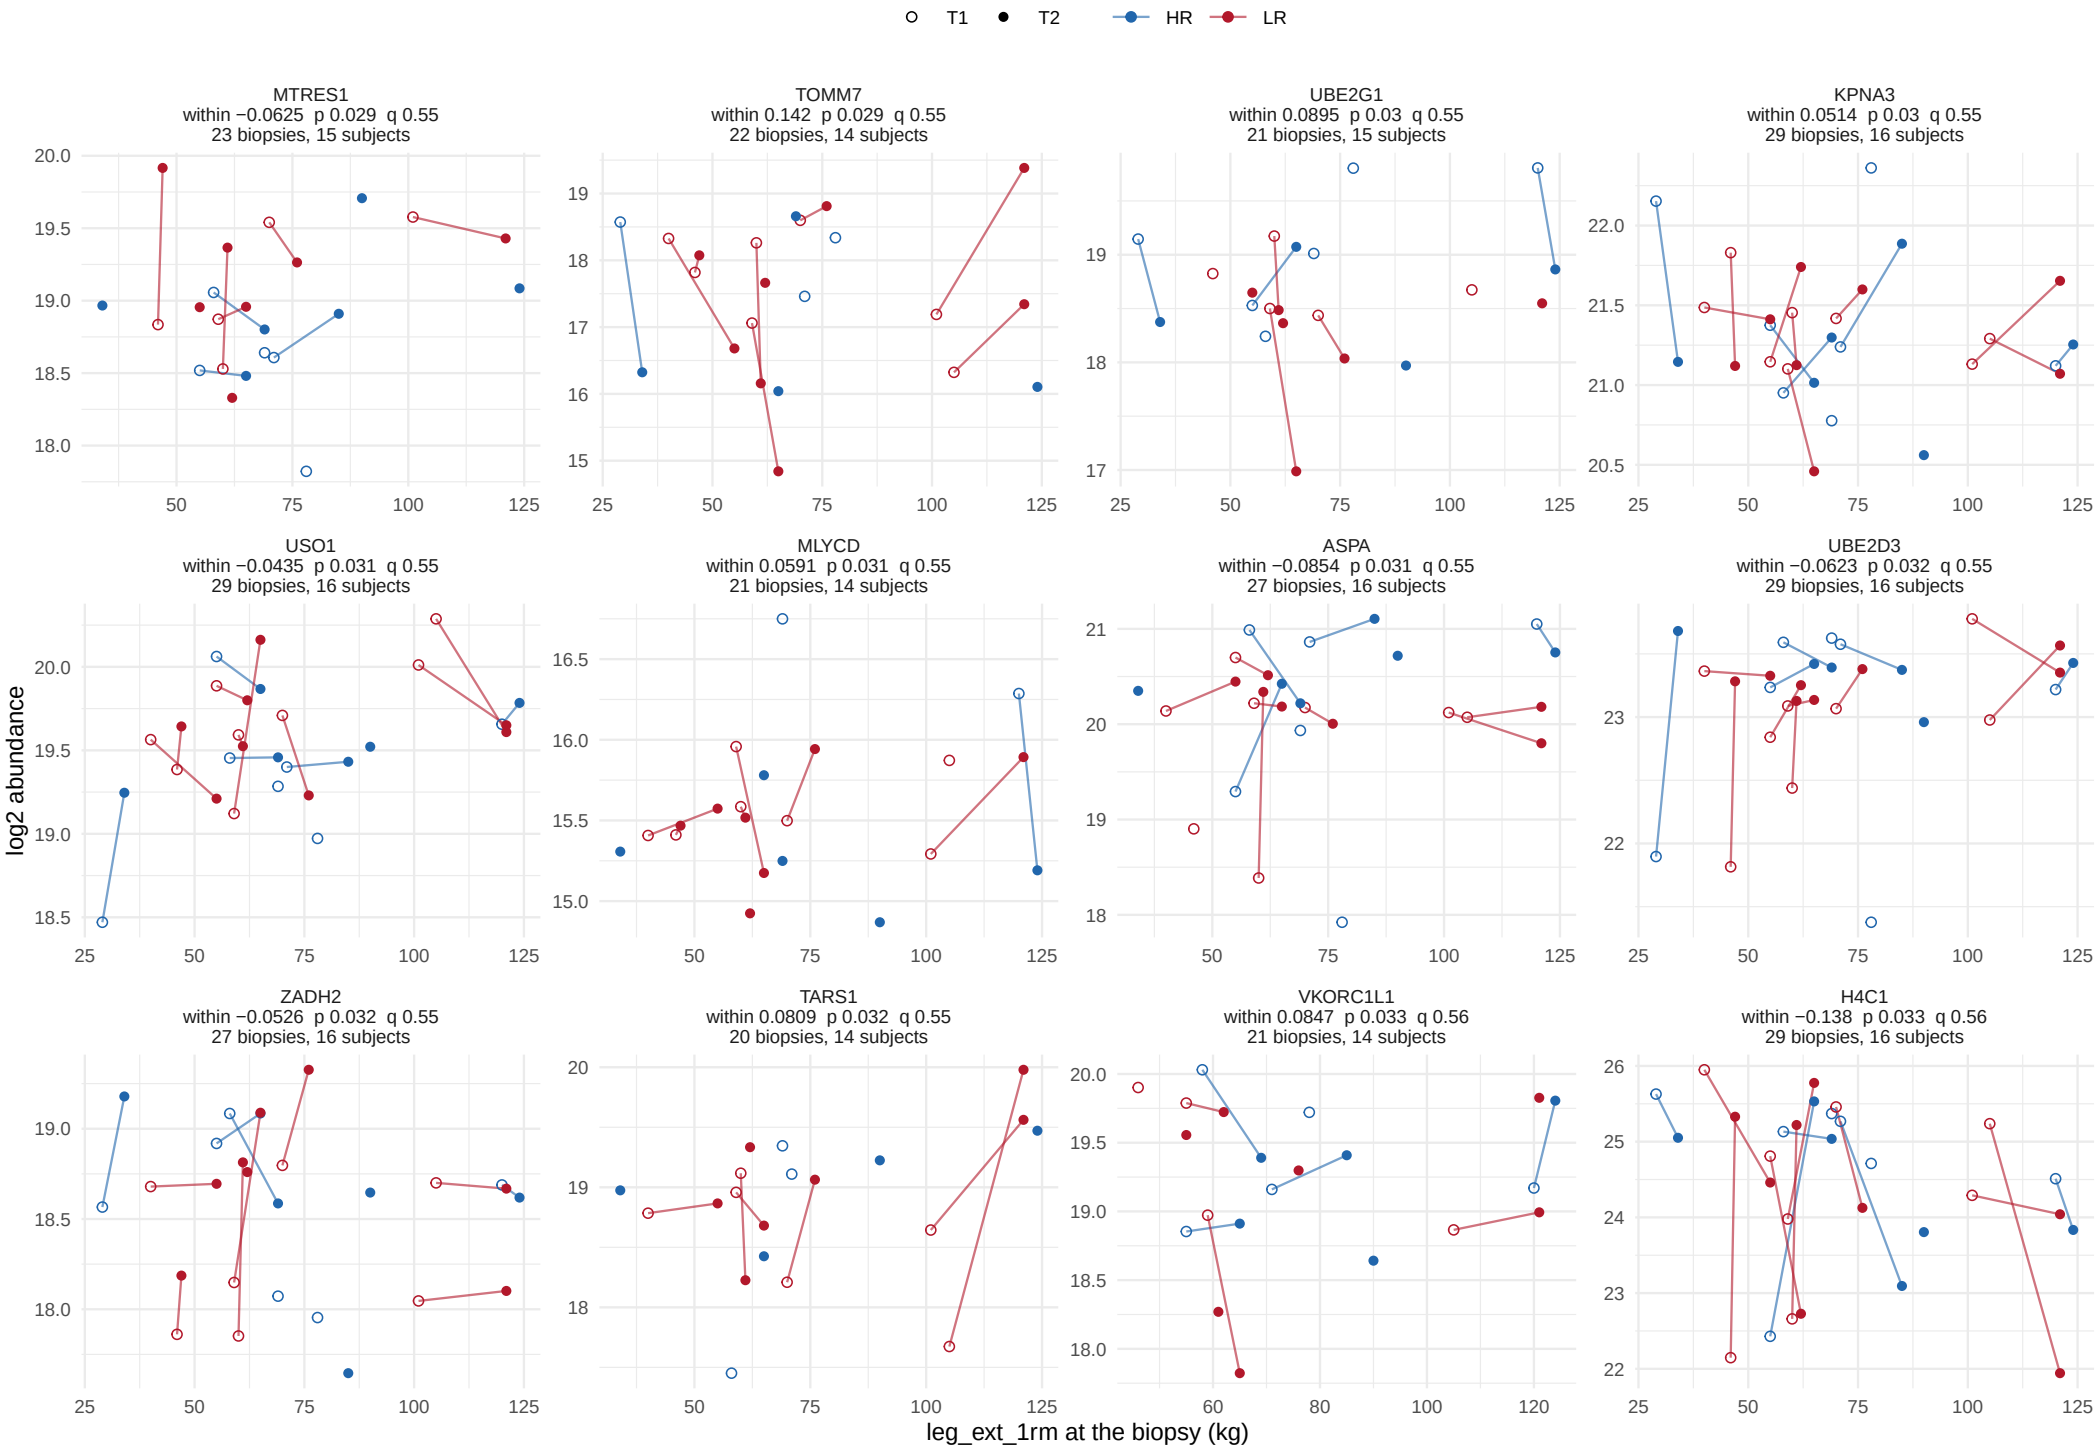

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_ext_1rm, within−person term


137 of 1615 proteins at p < 0.05, 0 at BH < 0.05. Page 9 of 12.

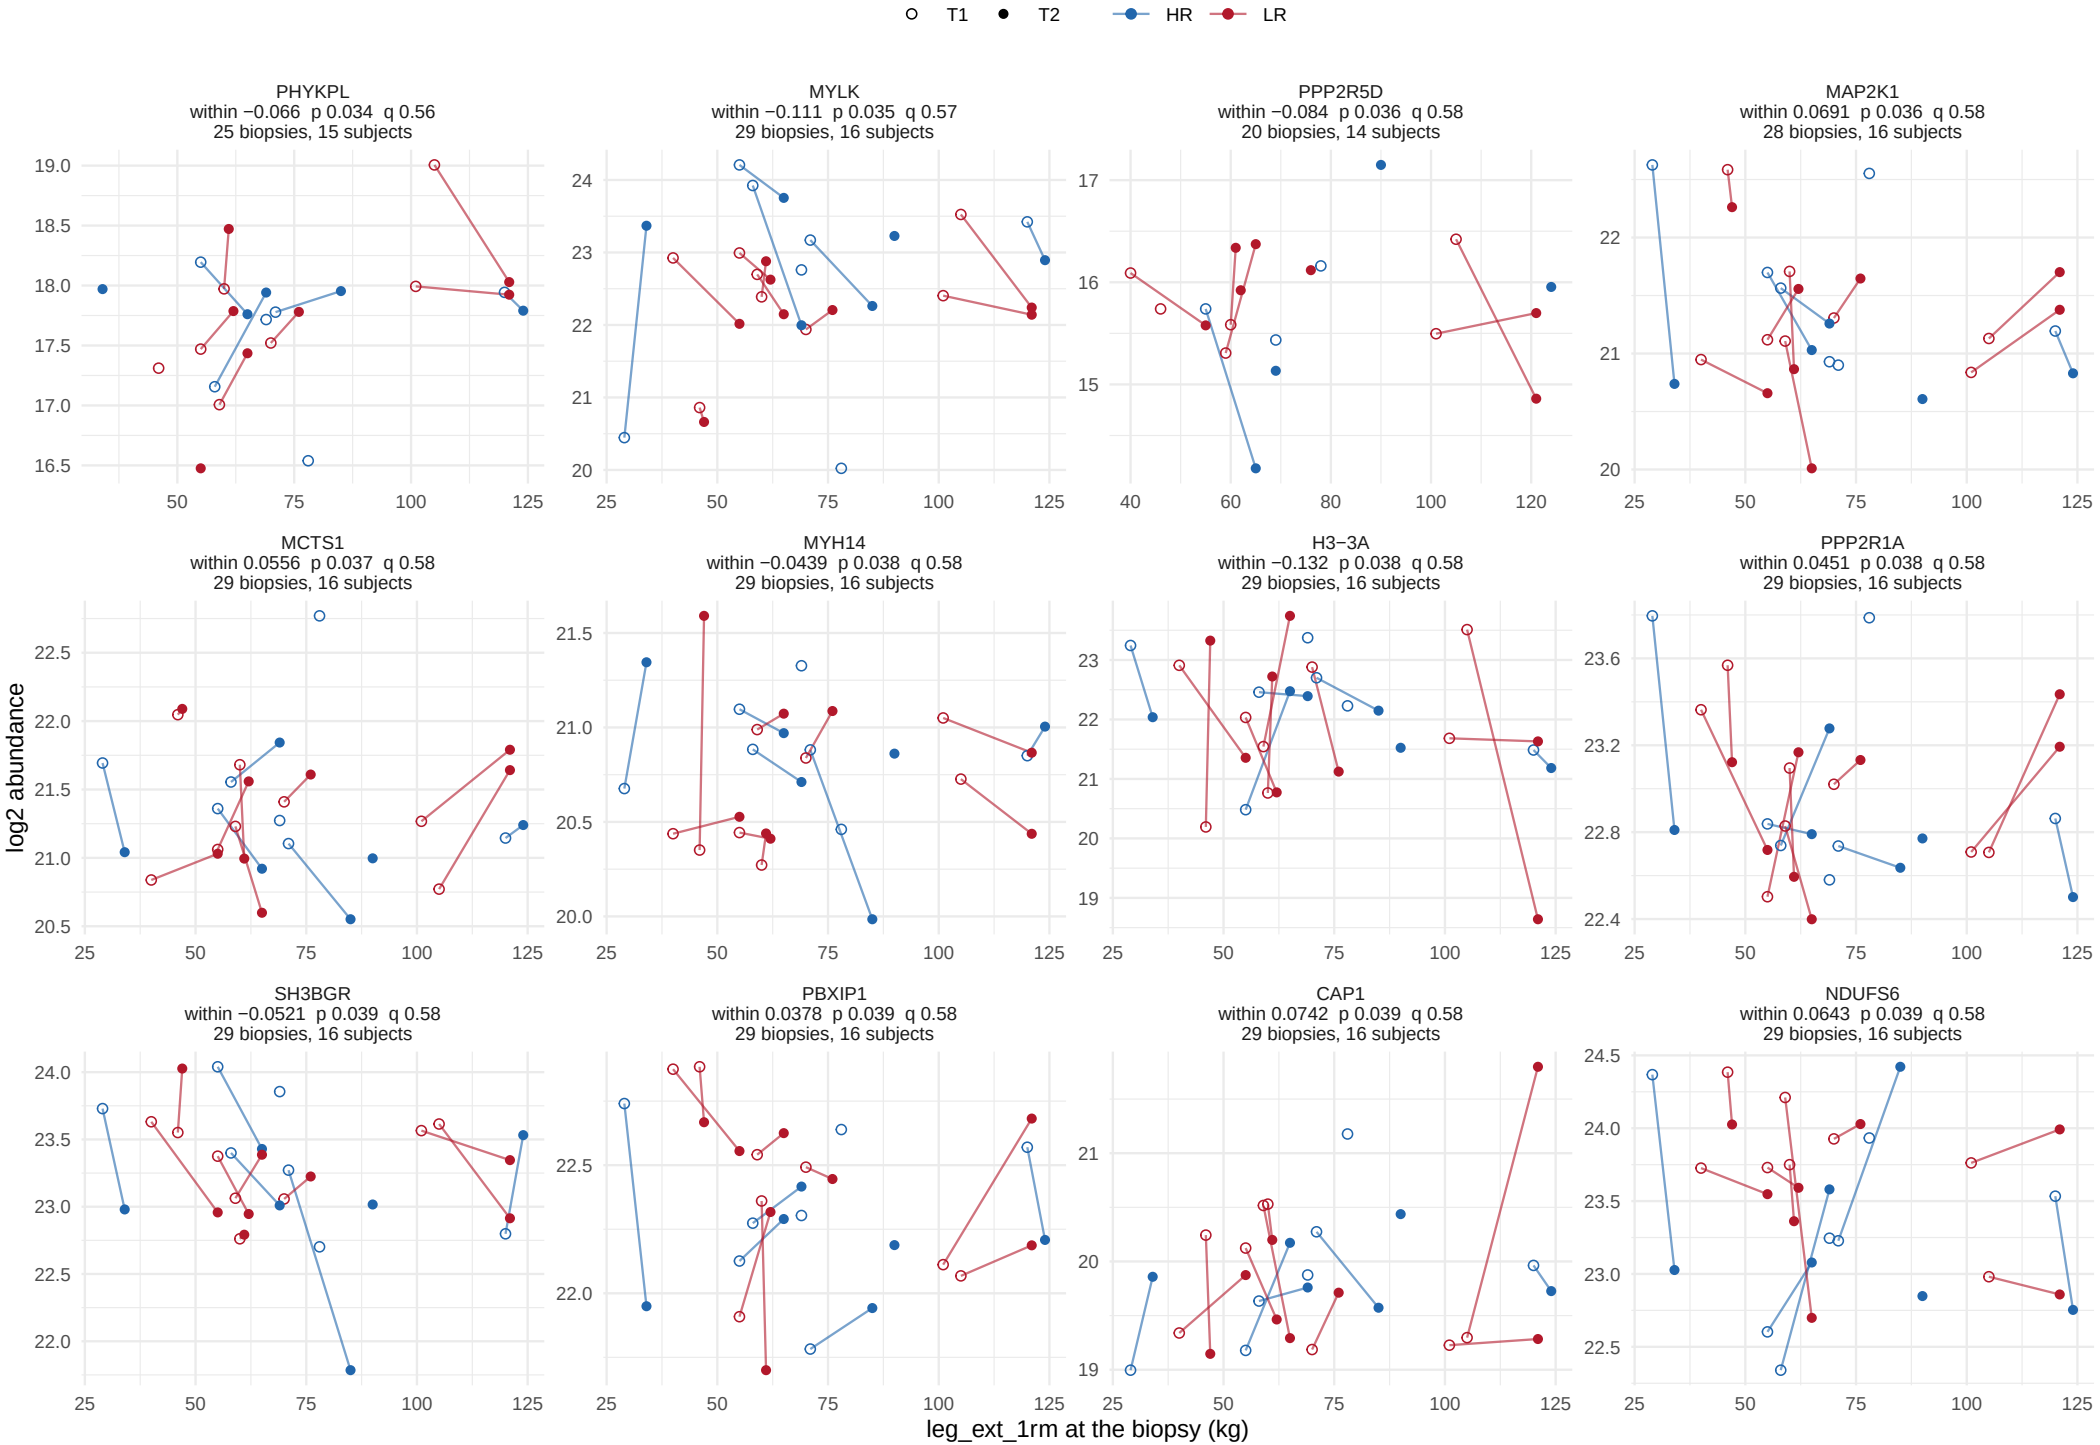

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_ext_1rm, within−person term


137 of 1615 proteins at p < 0.05, 0 at BH < 0.05. Page 10 of 12.

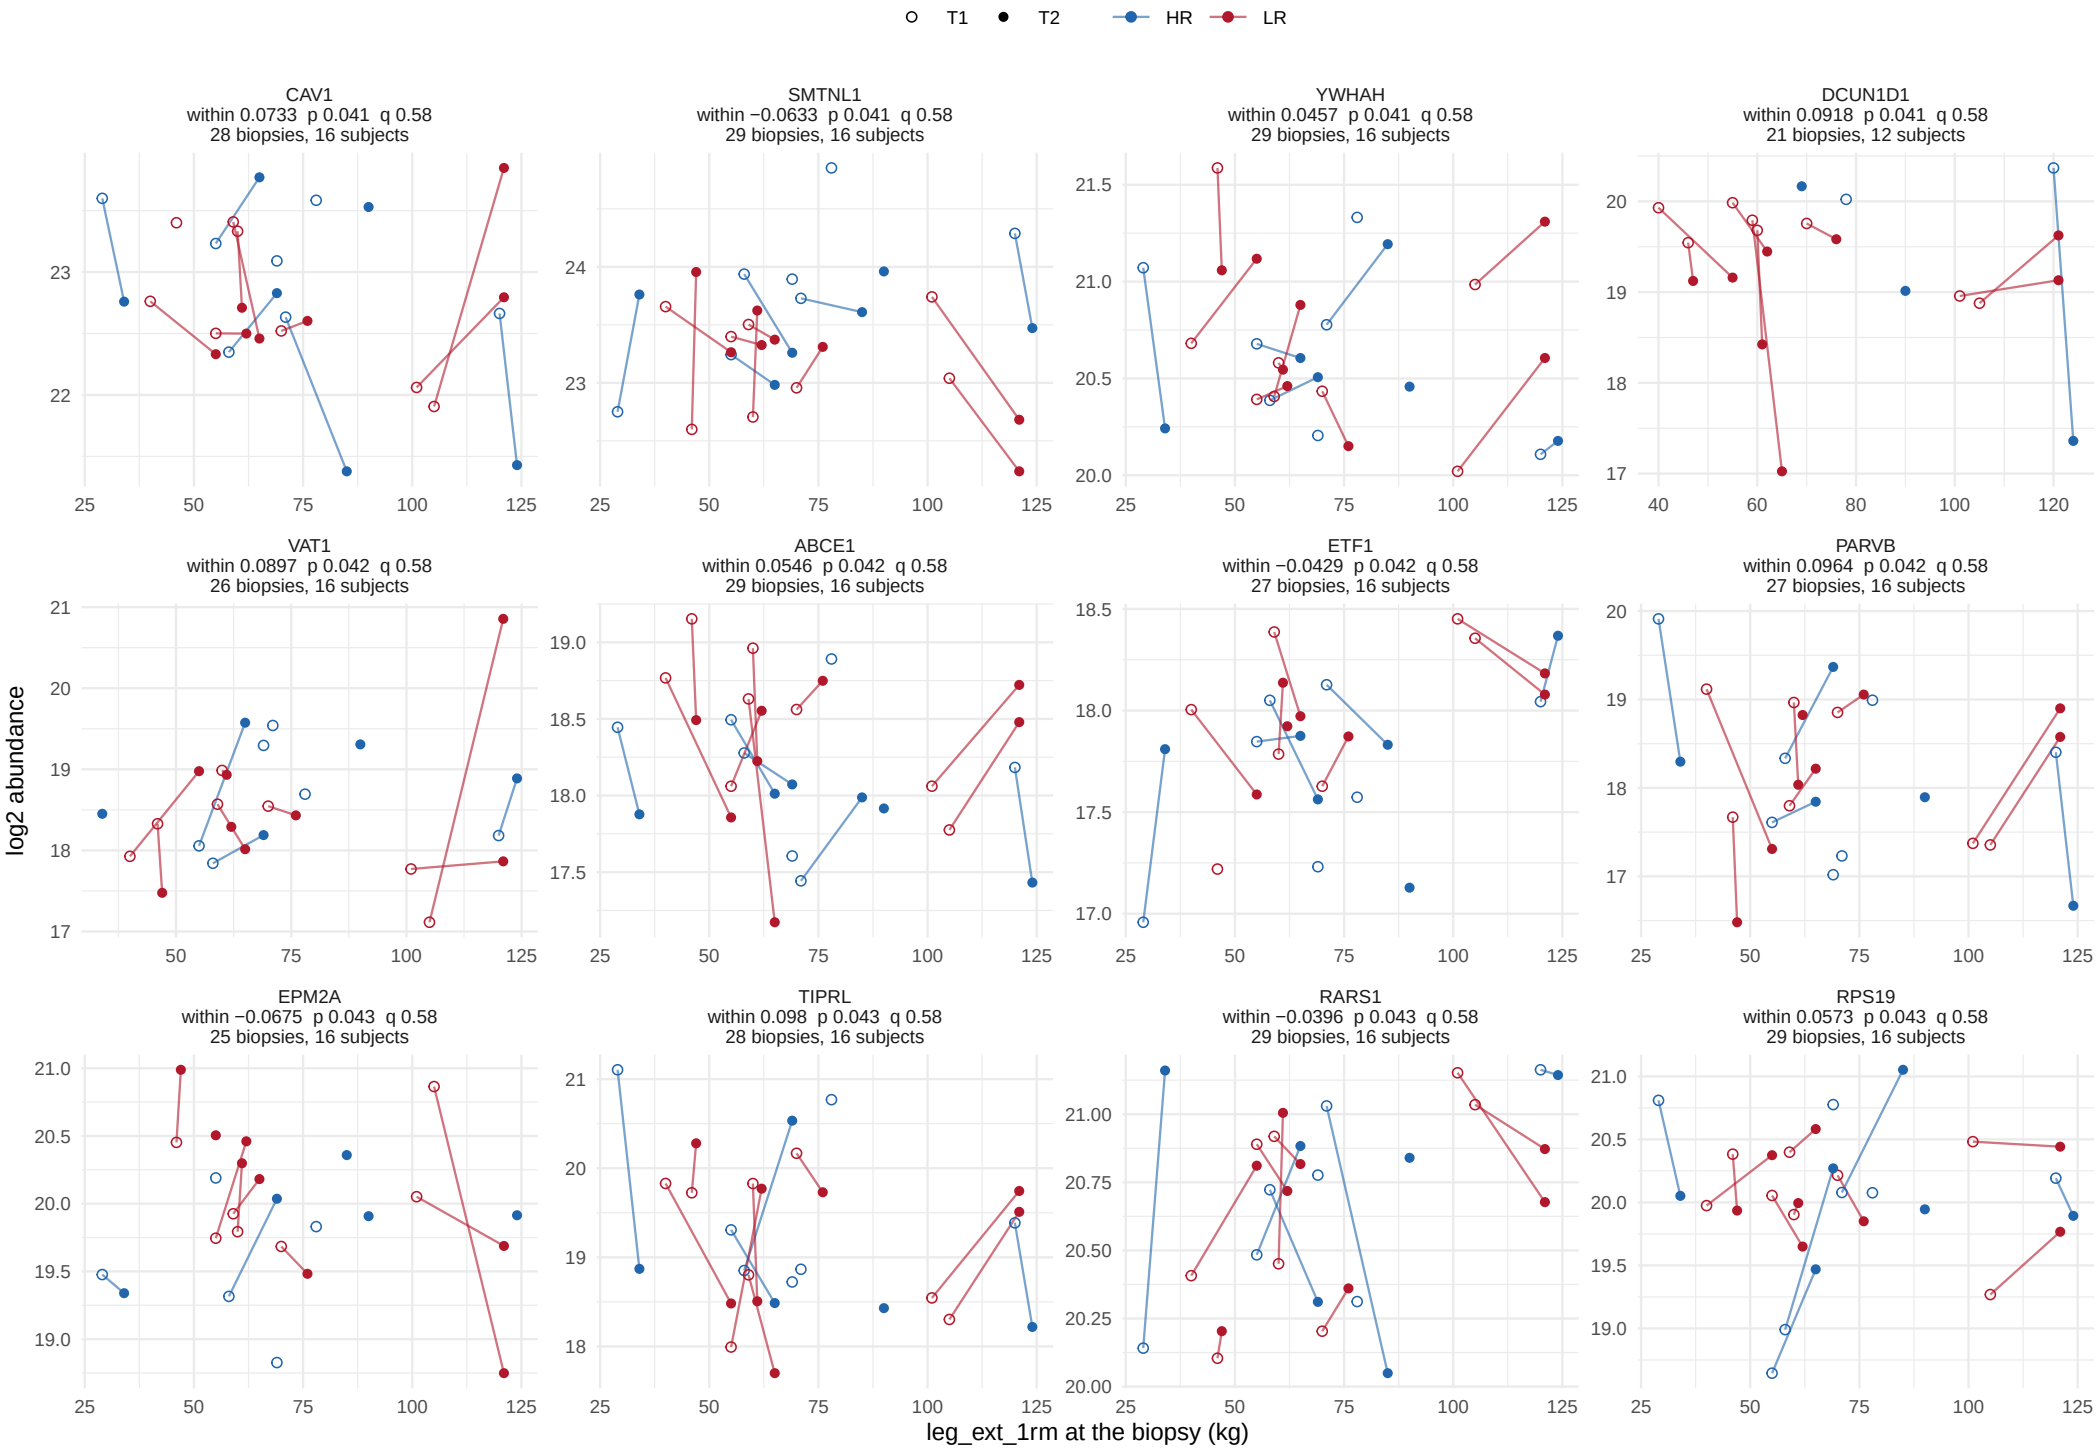

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_ext_1rm, within−person term


137 of 1615 proteins at p < 0.05, 0 at BH < 0.05. Page 11 of 12.

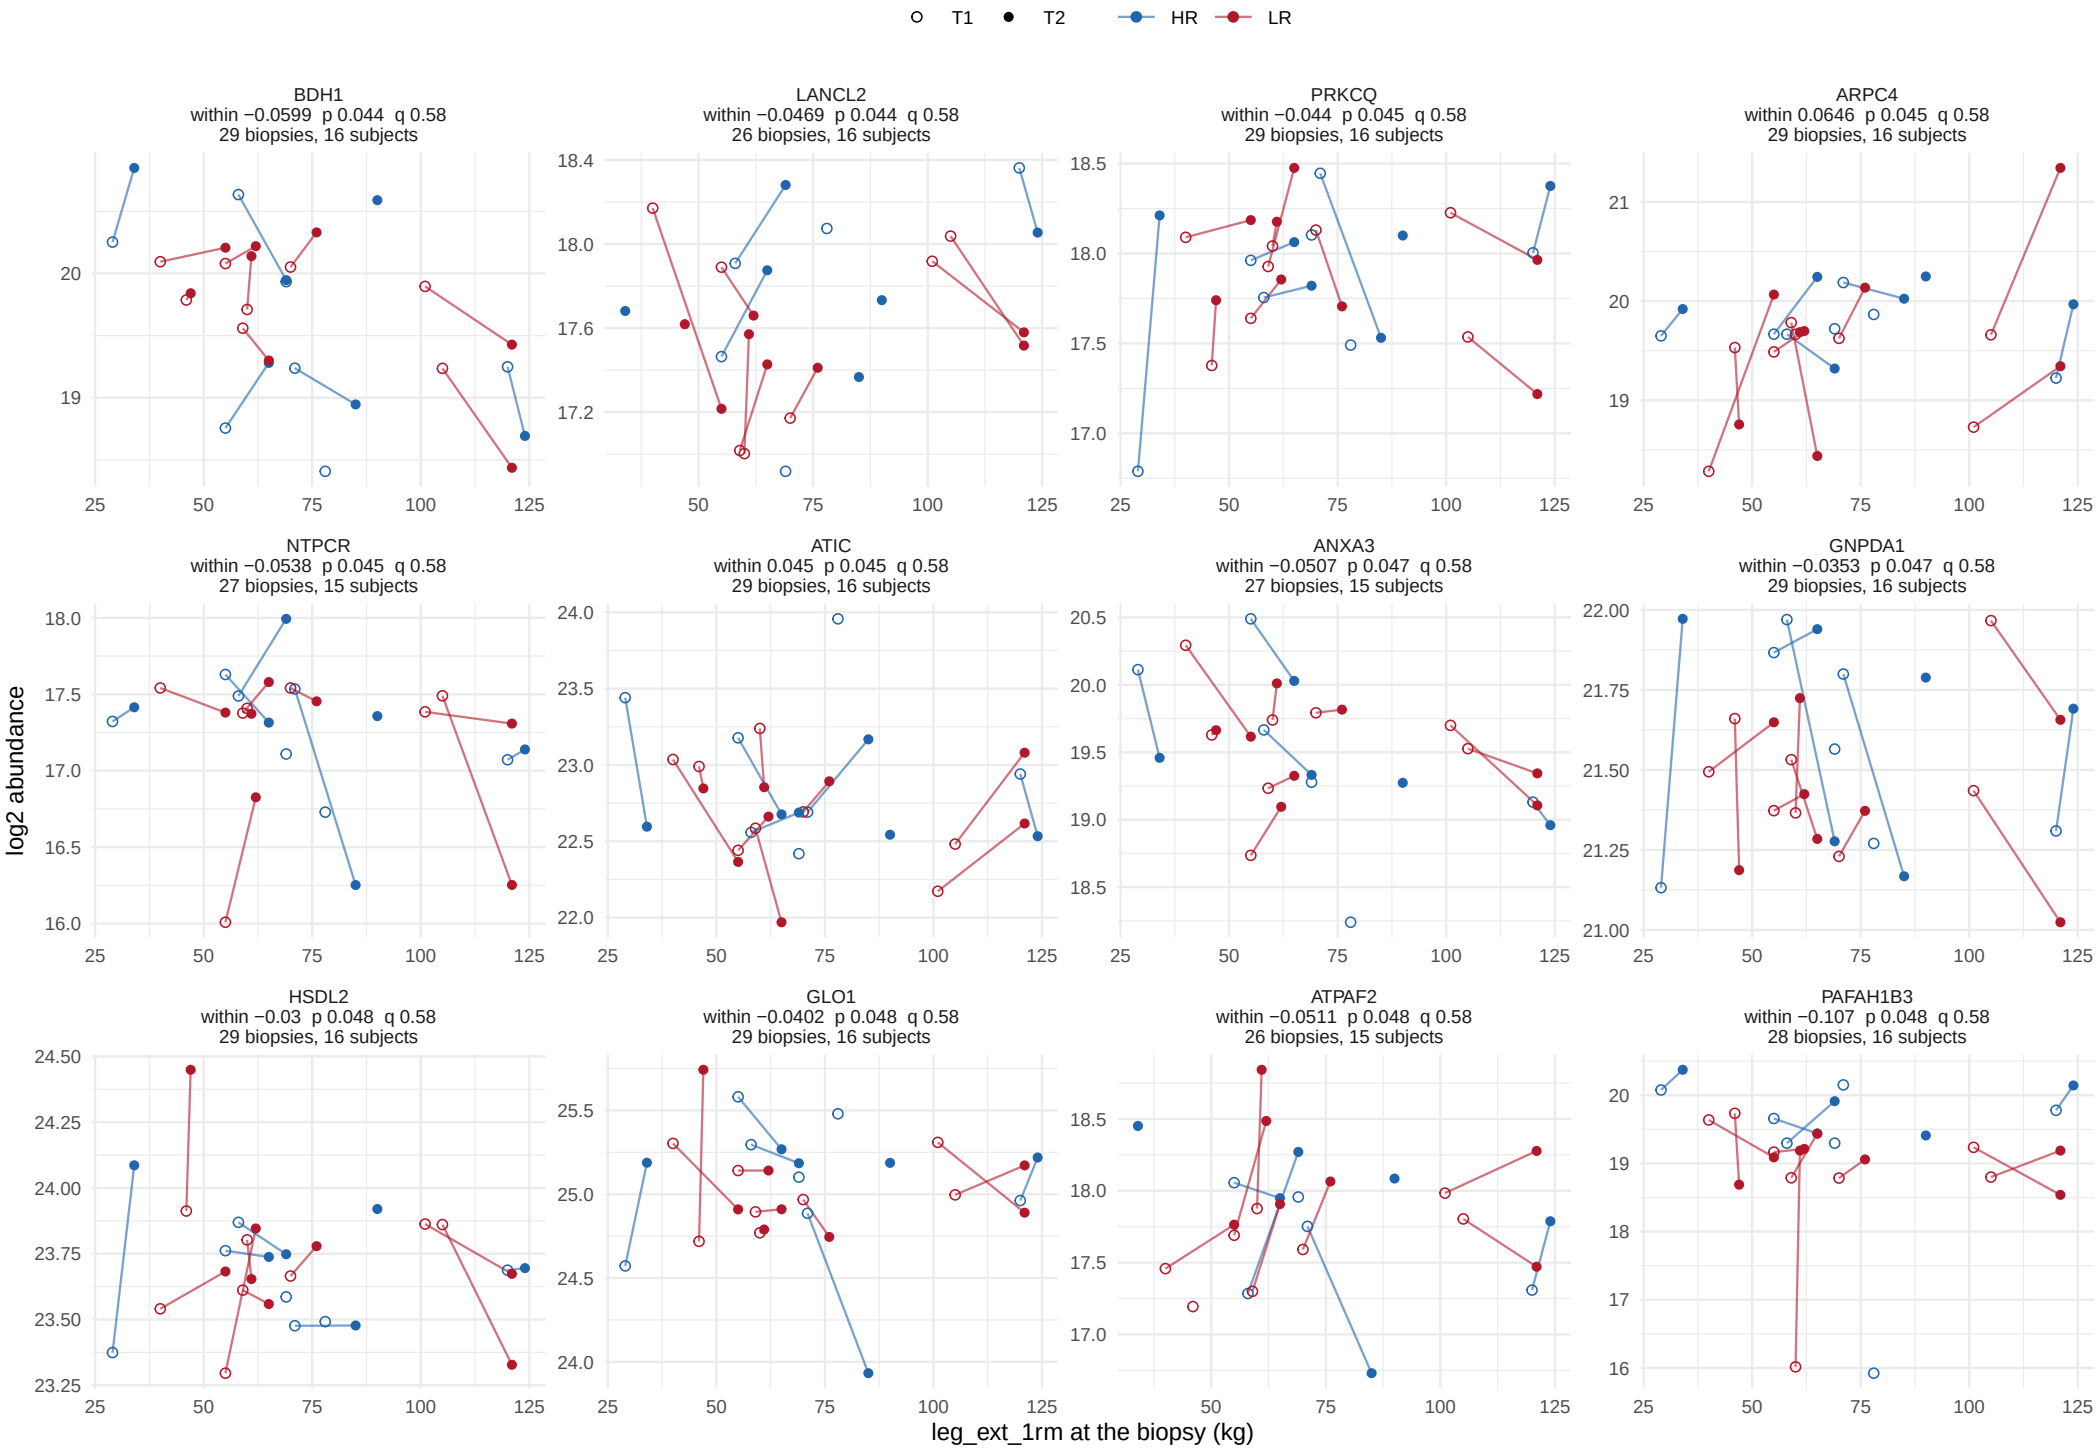

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_ext_1rm, within−person term


137 of 1615 proteins at p < 0.05, 0 at BH < 0.05. Page 12 of 12.

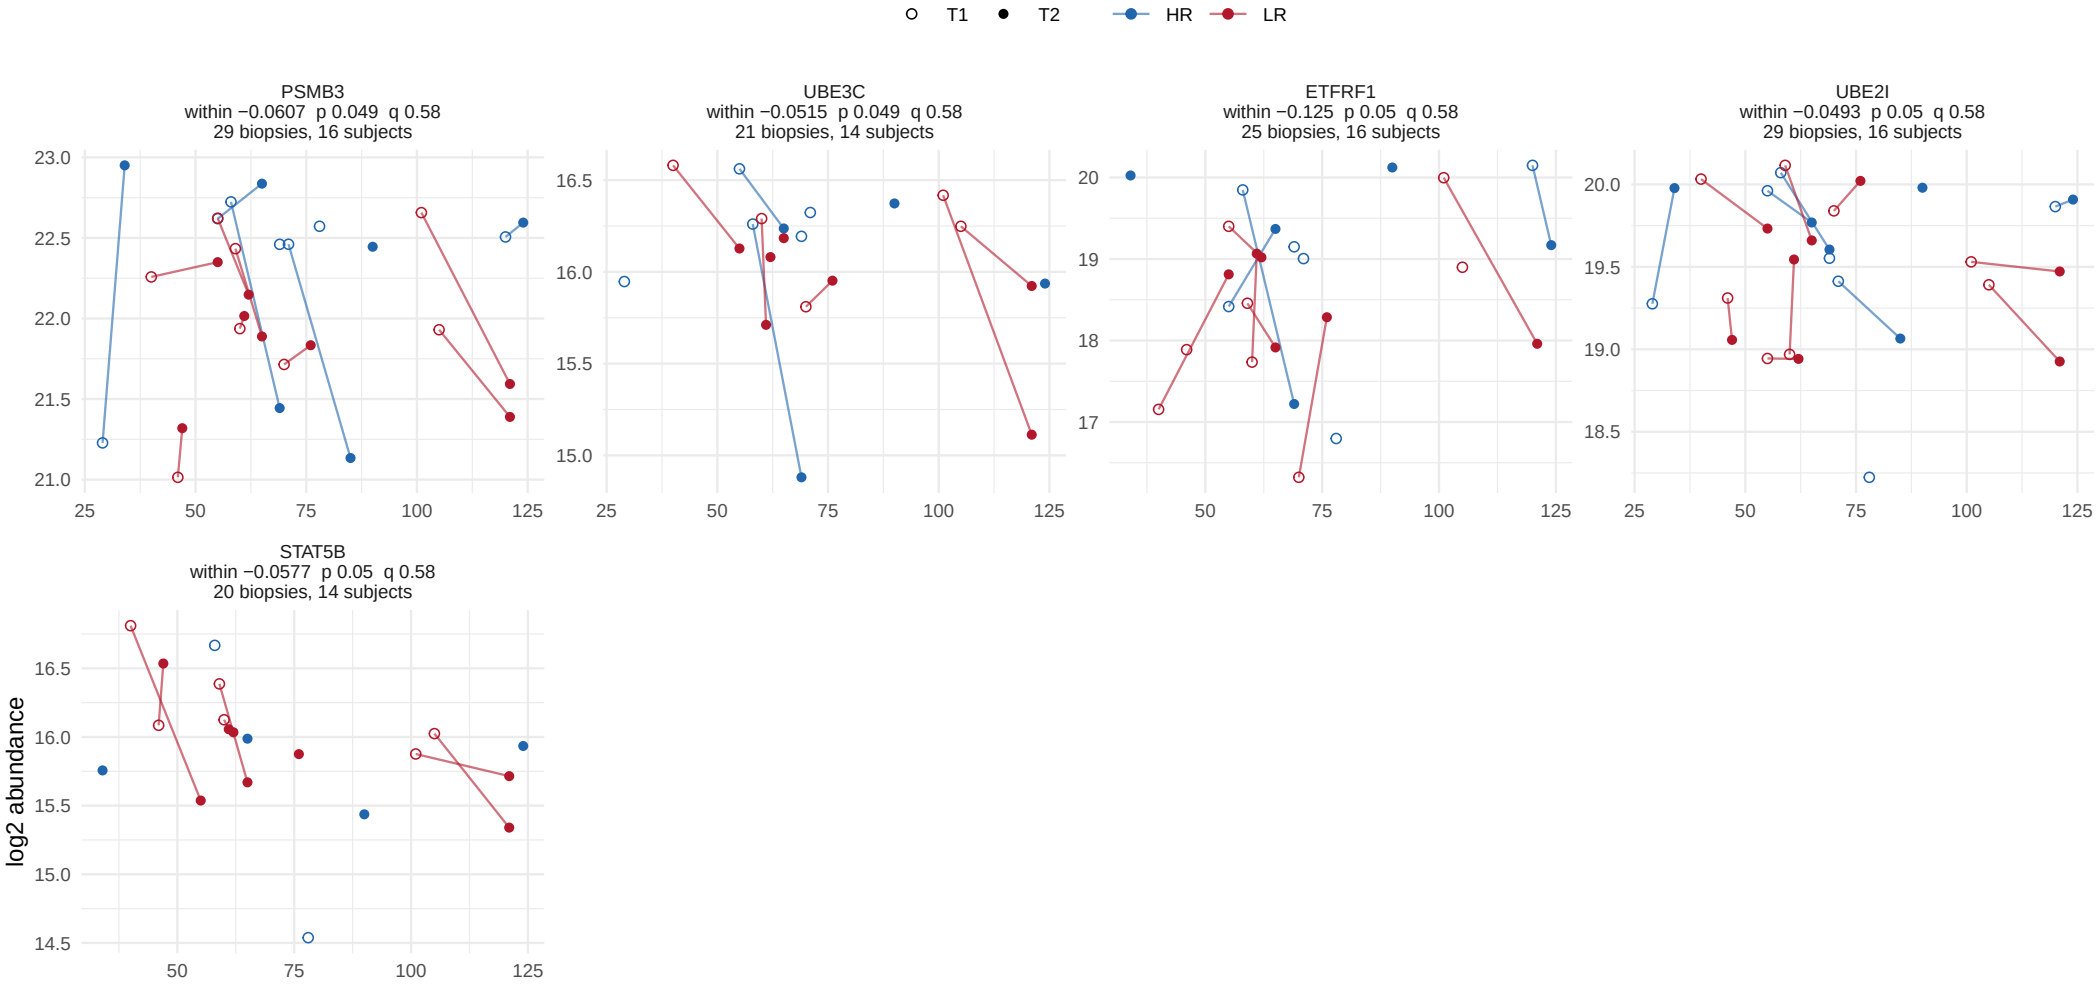

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_ext_1rm, between−person term


117 of 1615 proteins at p < 0.05, 0 at BH < 0.05. Page 1 of 10.

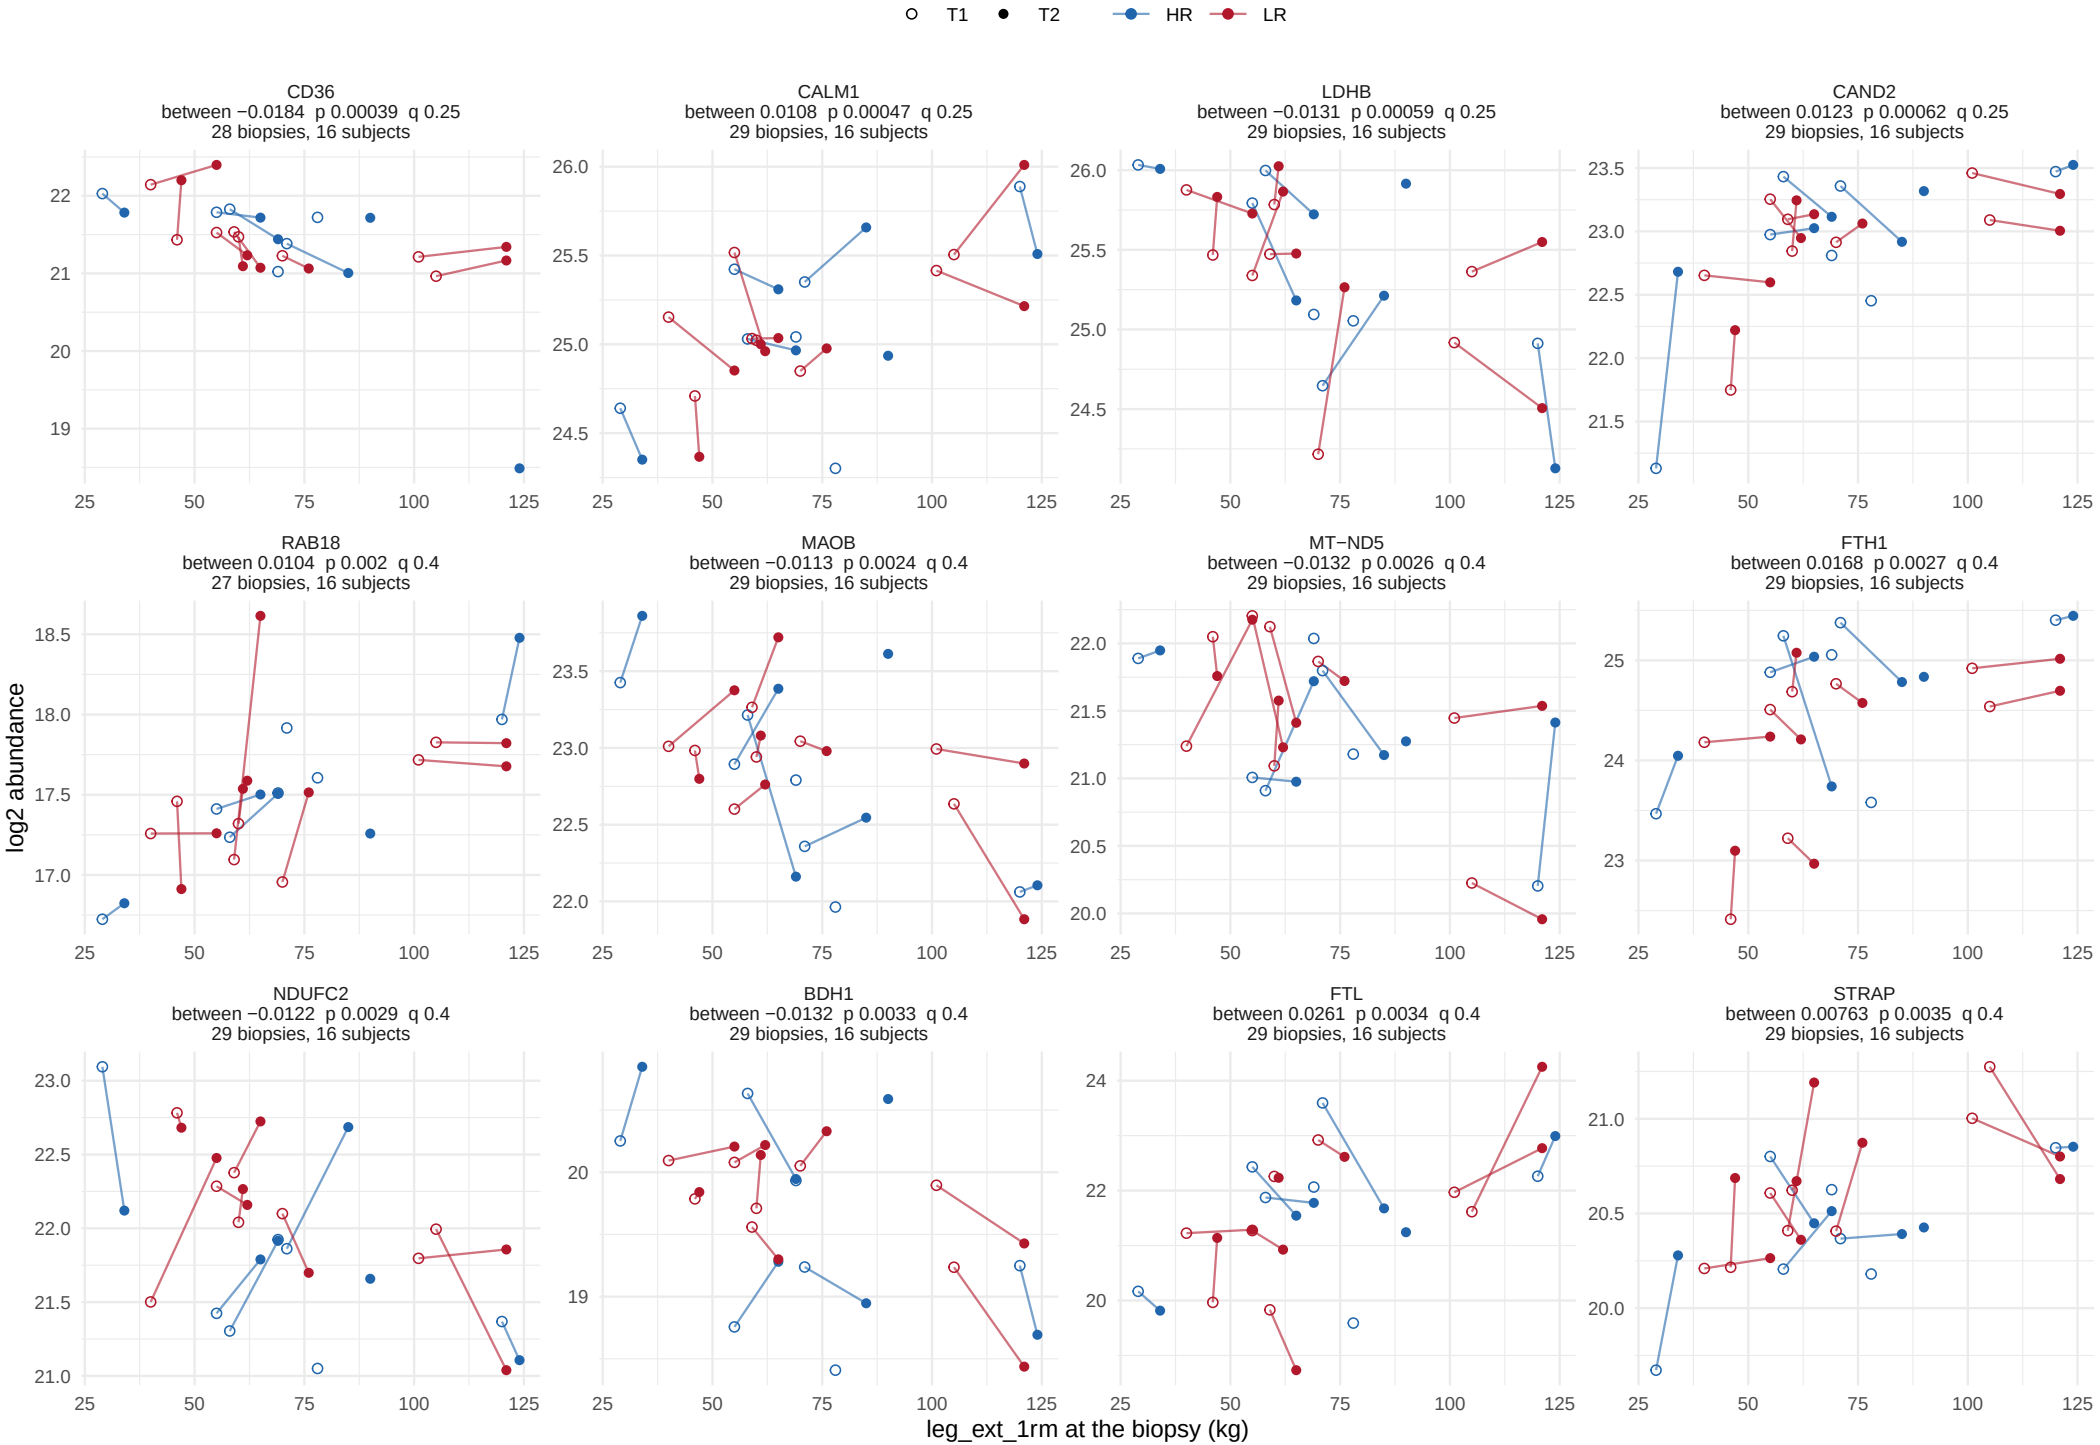

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_ext_1rm, between−person term


117 of 1615 proteins at p < 0.05, 0 at BH < 0.05. Page 2 of 10.

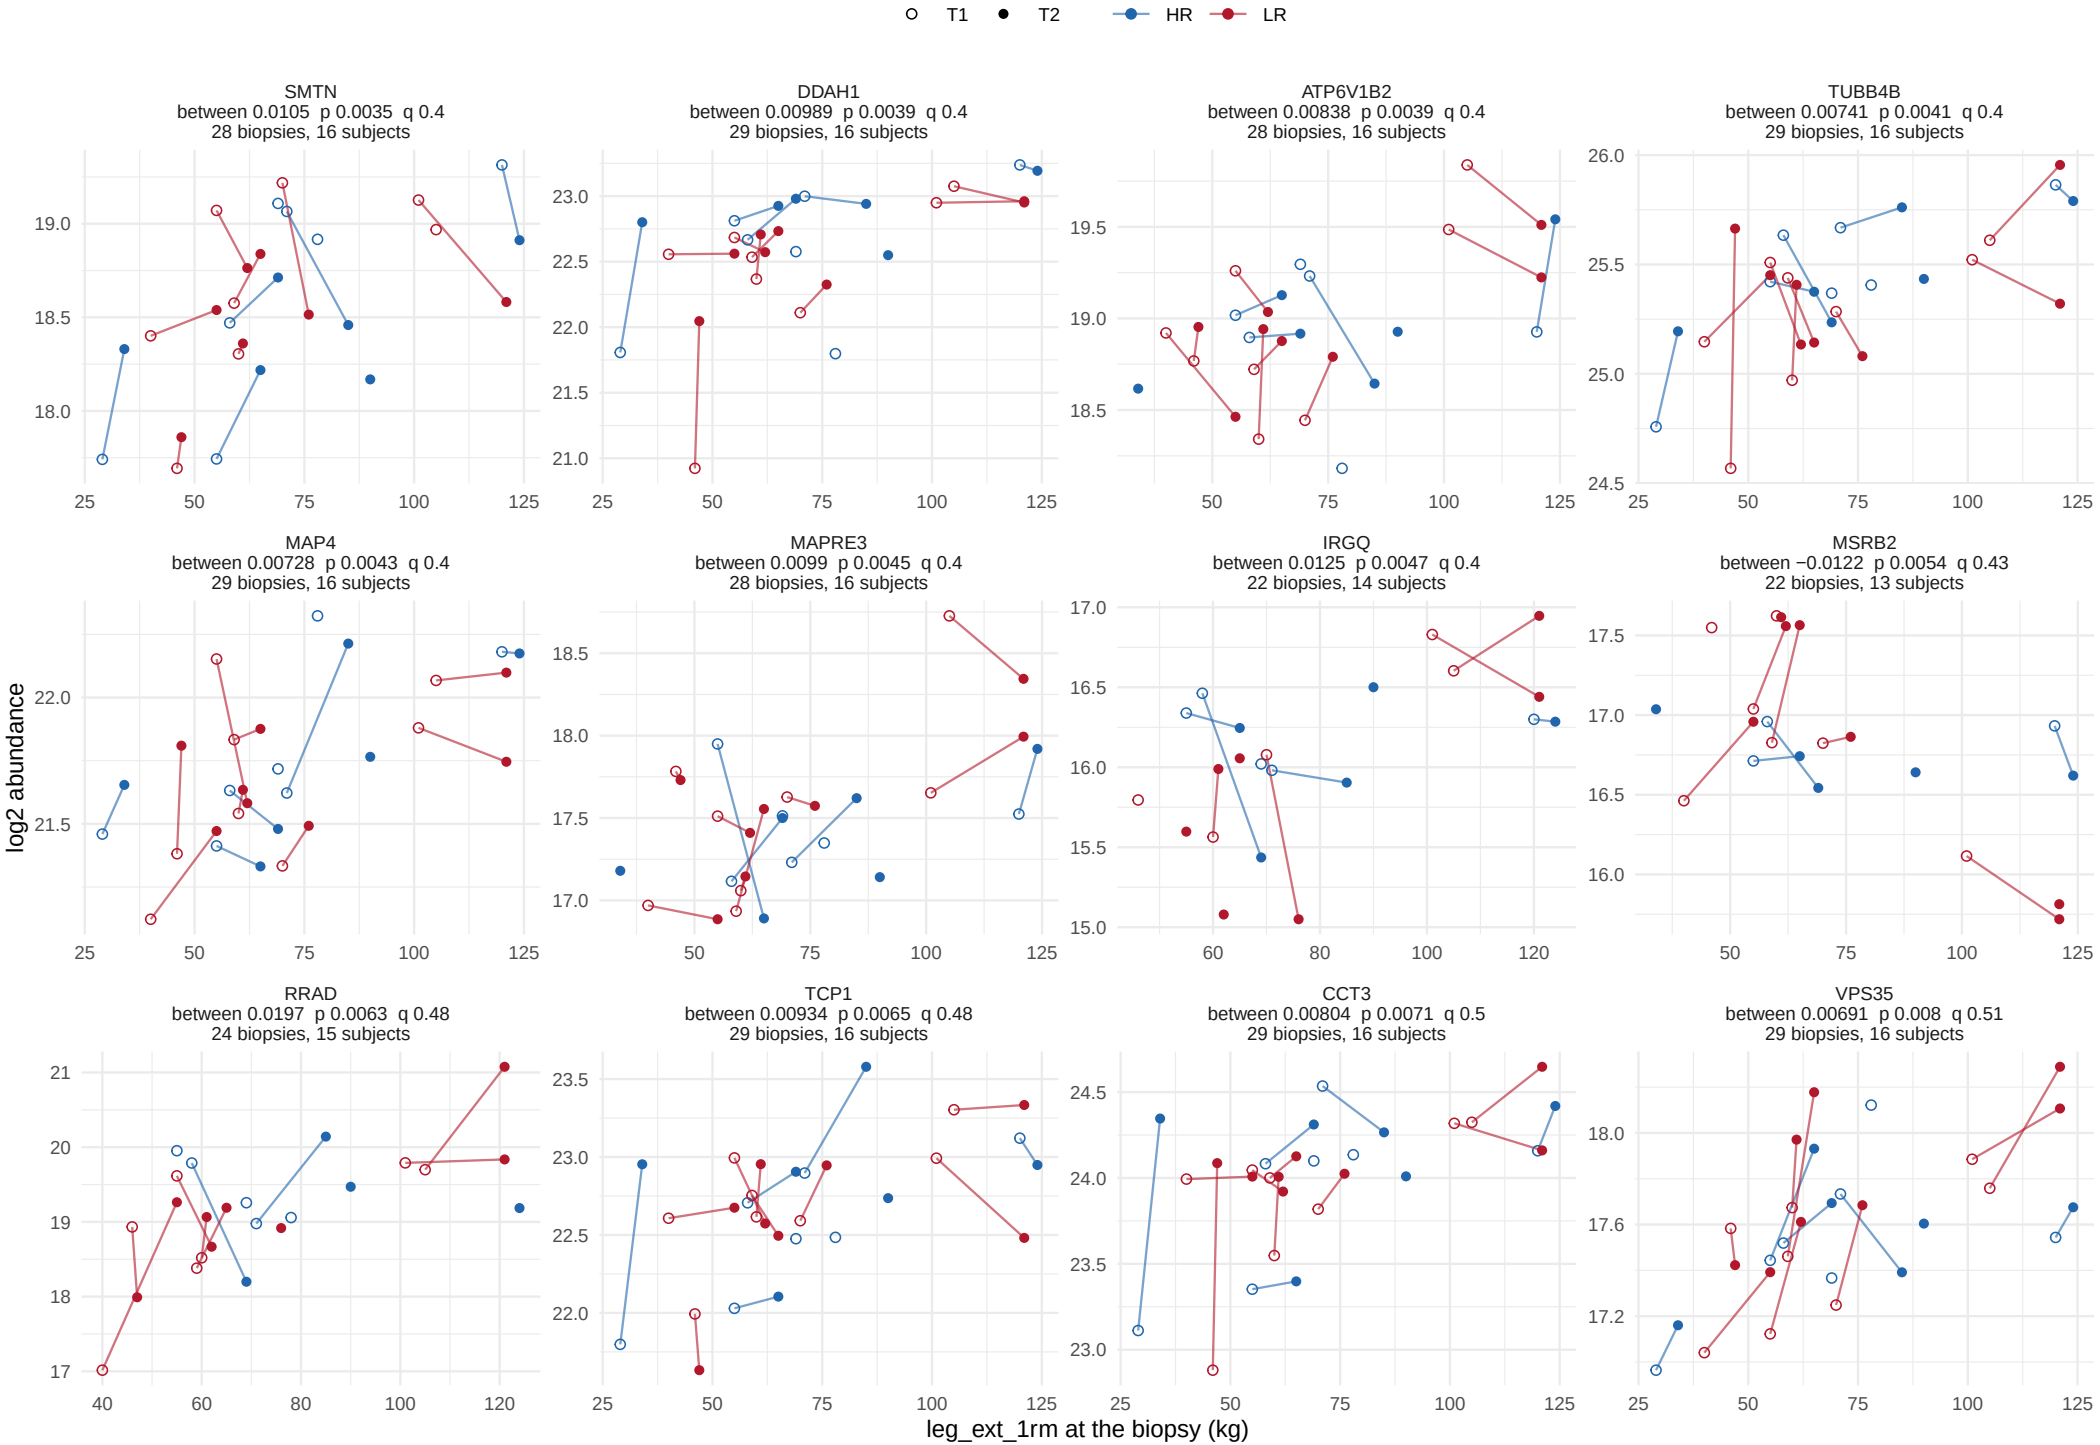

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_ext_1rm, between−person term


117 of 1615 proteins at p < 0.05, 0 at BH < 0.05. Page 3 of 10.

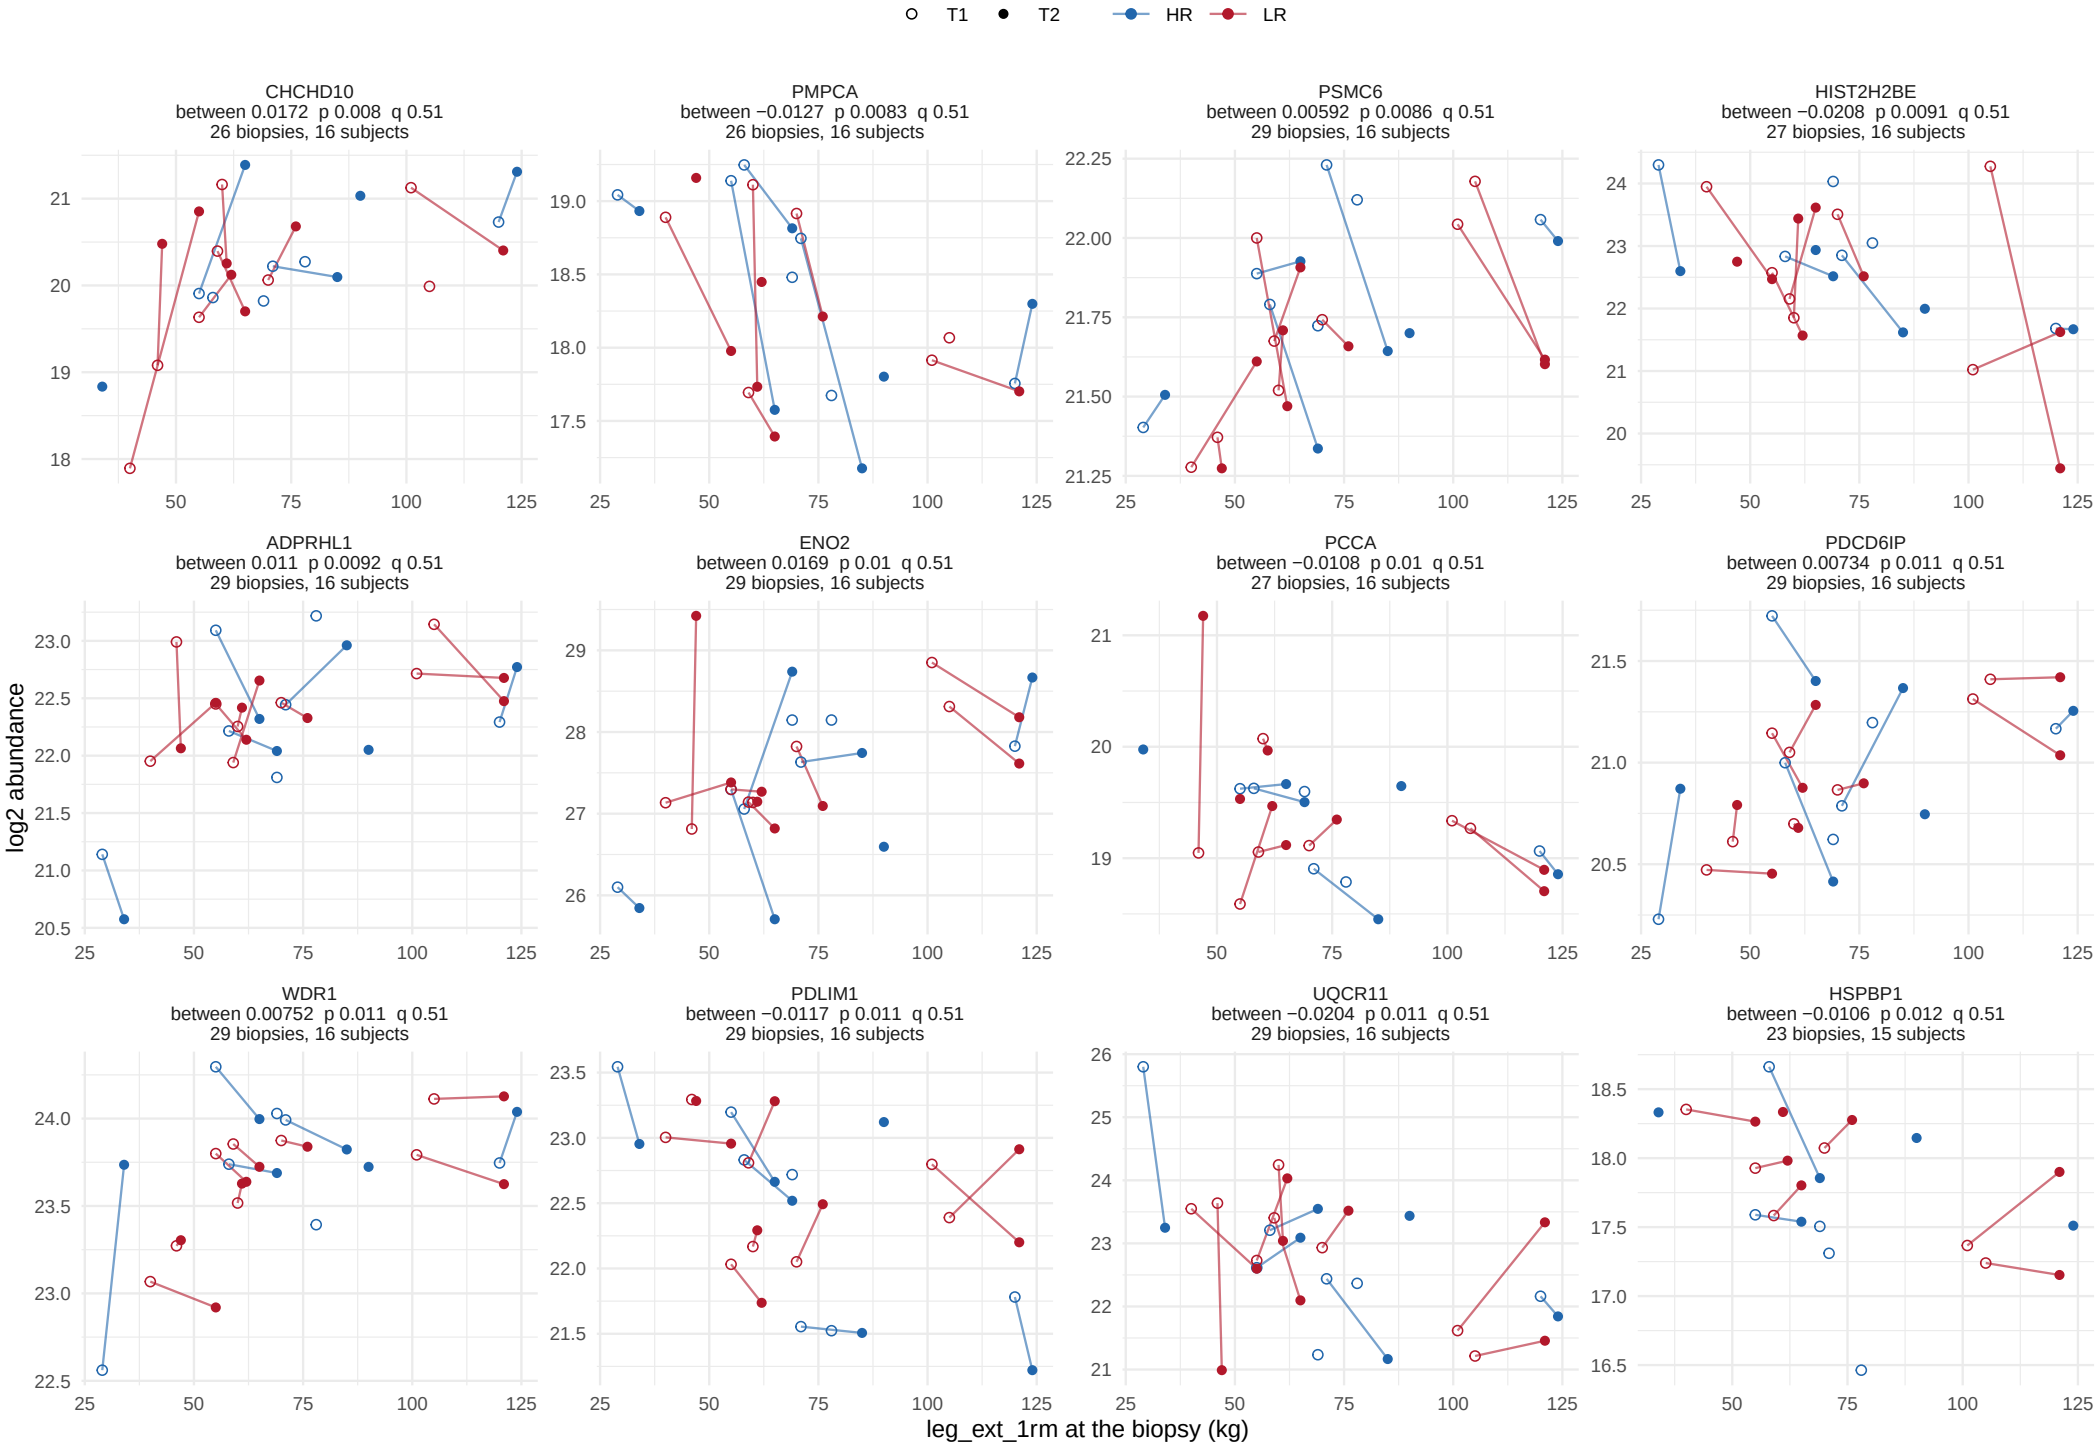

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_ext_1rm, between−person term


117 of 1615 proteins at p < 0.05, 0 at BH < 0.05. Page 4 of 10.

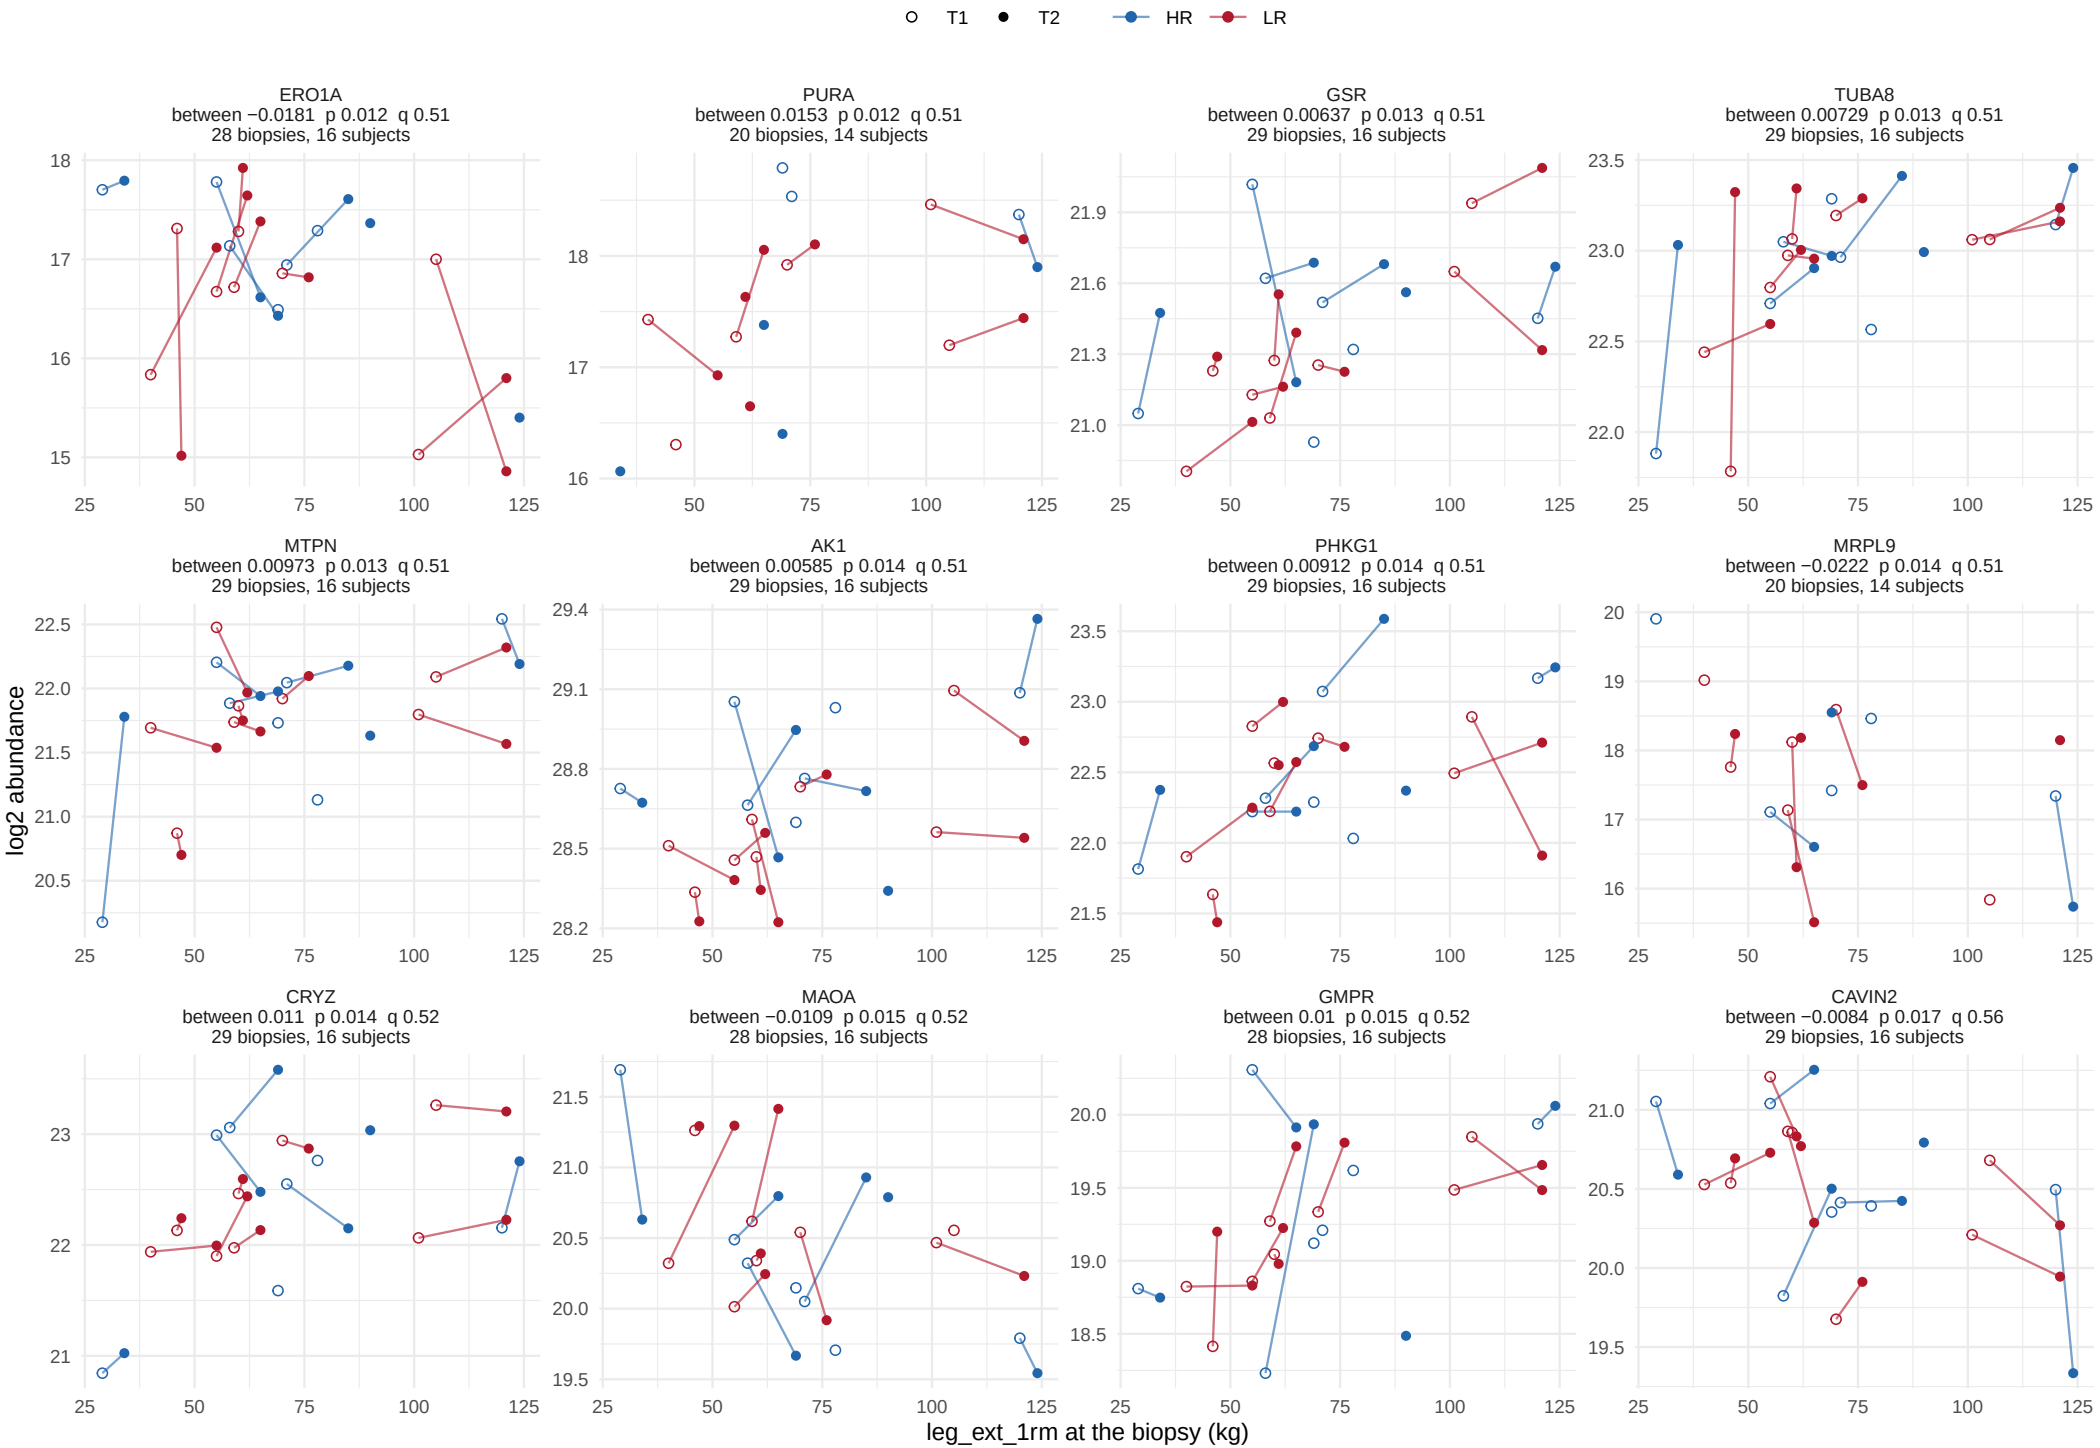

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_ext_1rm, between−person term


117 of 1615 proteins at p < 0.05, 0 at BH < 0.05. Page 5 of 10.

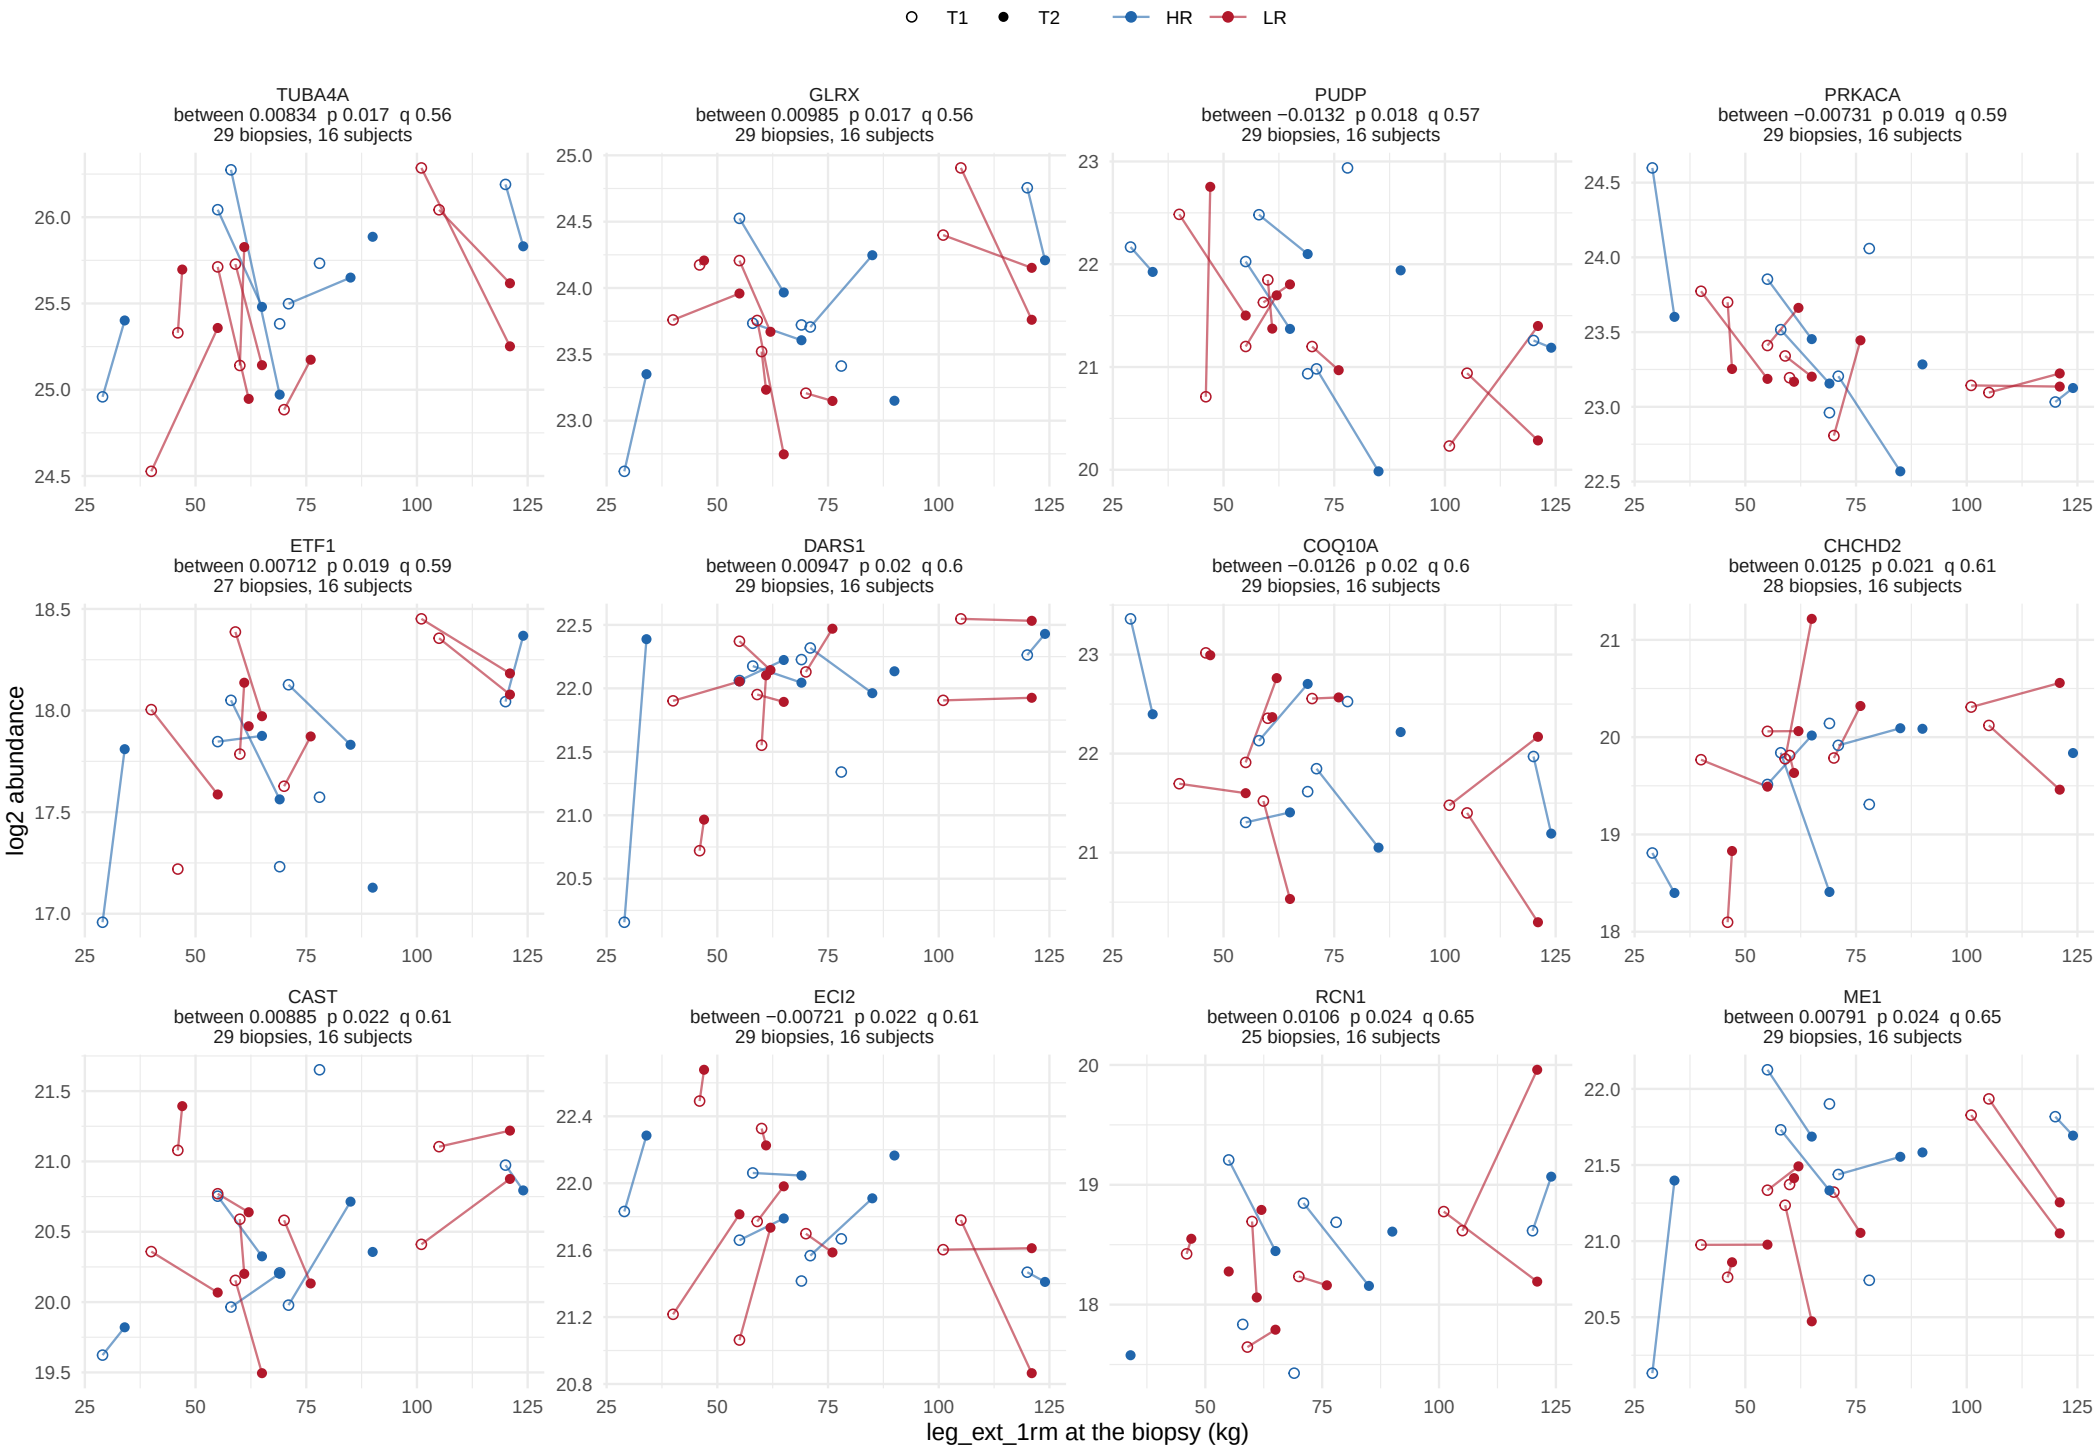

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_ext_1rm, between−person term


117 of 1615 proteins at p < 0.05, 0 at BH < 0.05. Page 6 of 10.

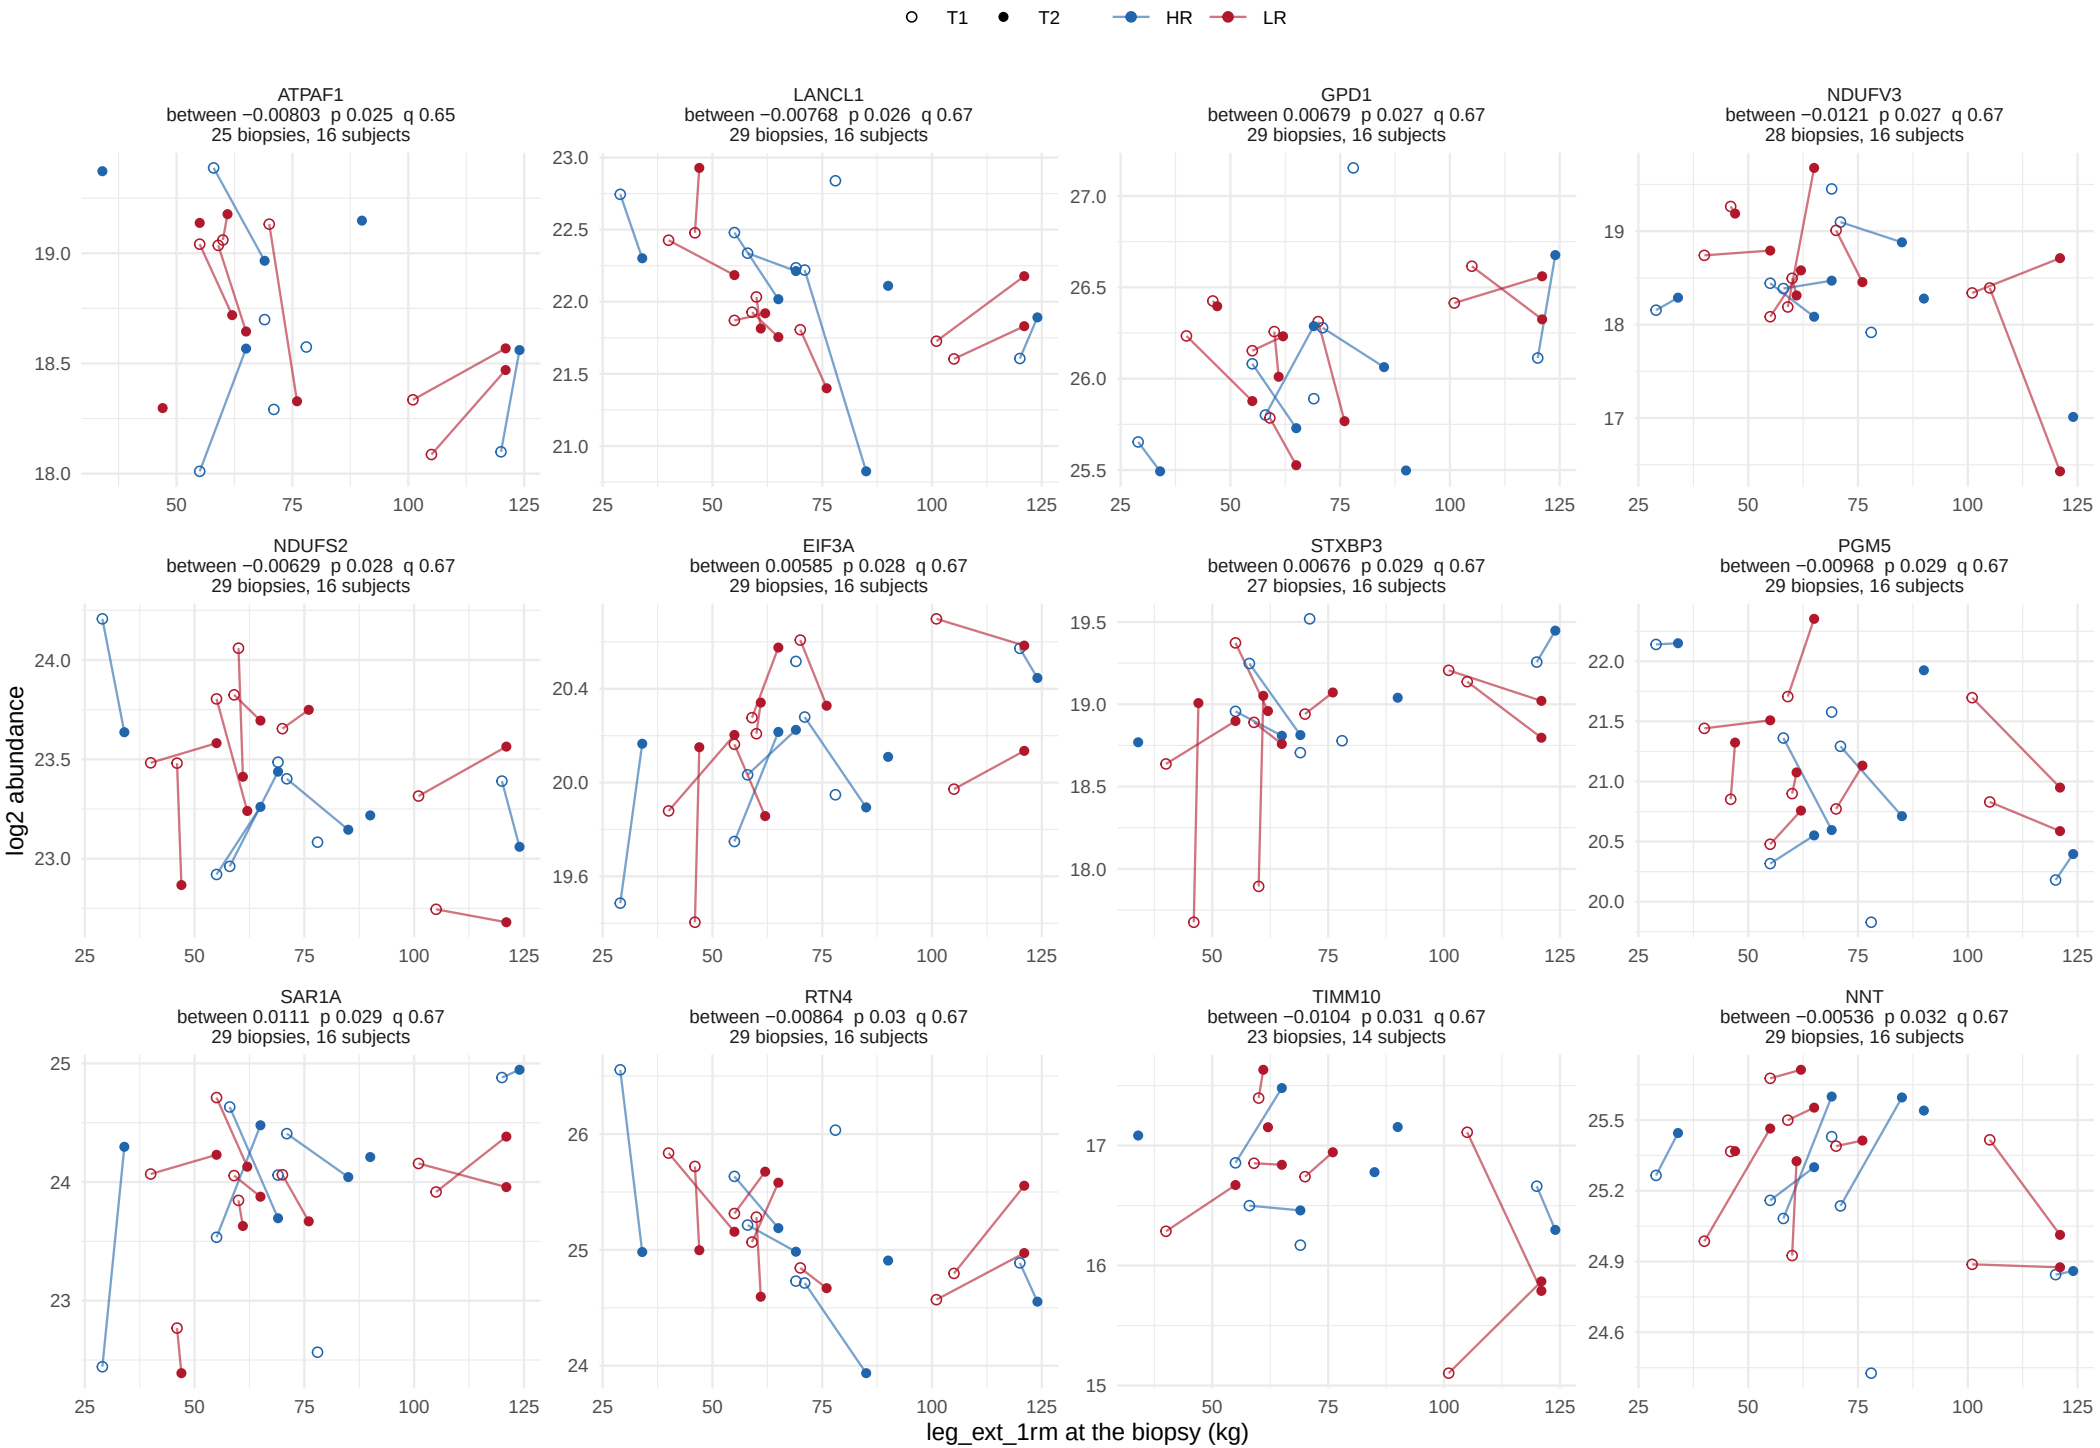

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_ext_1rm, between−person term


117 of 1615 proteins at p < 0.05, 0 at BH < 0.05. Page 7 of 10.

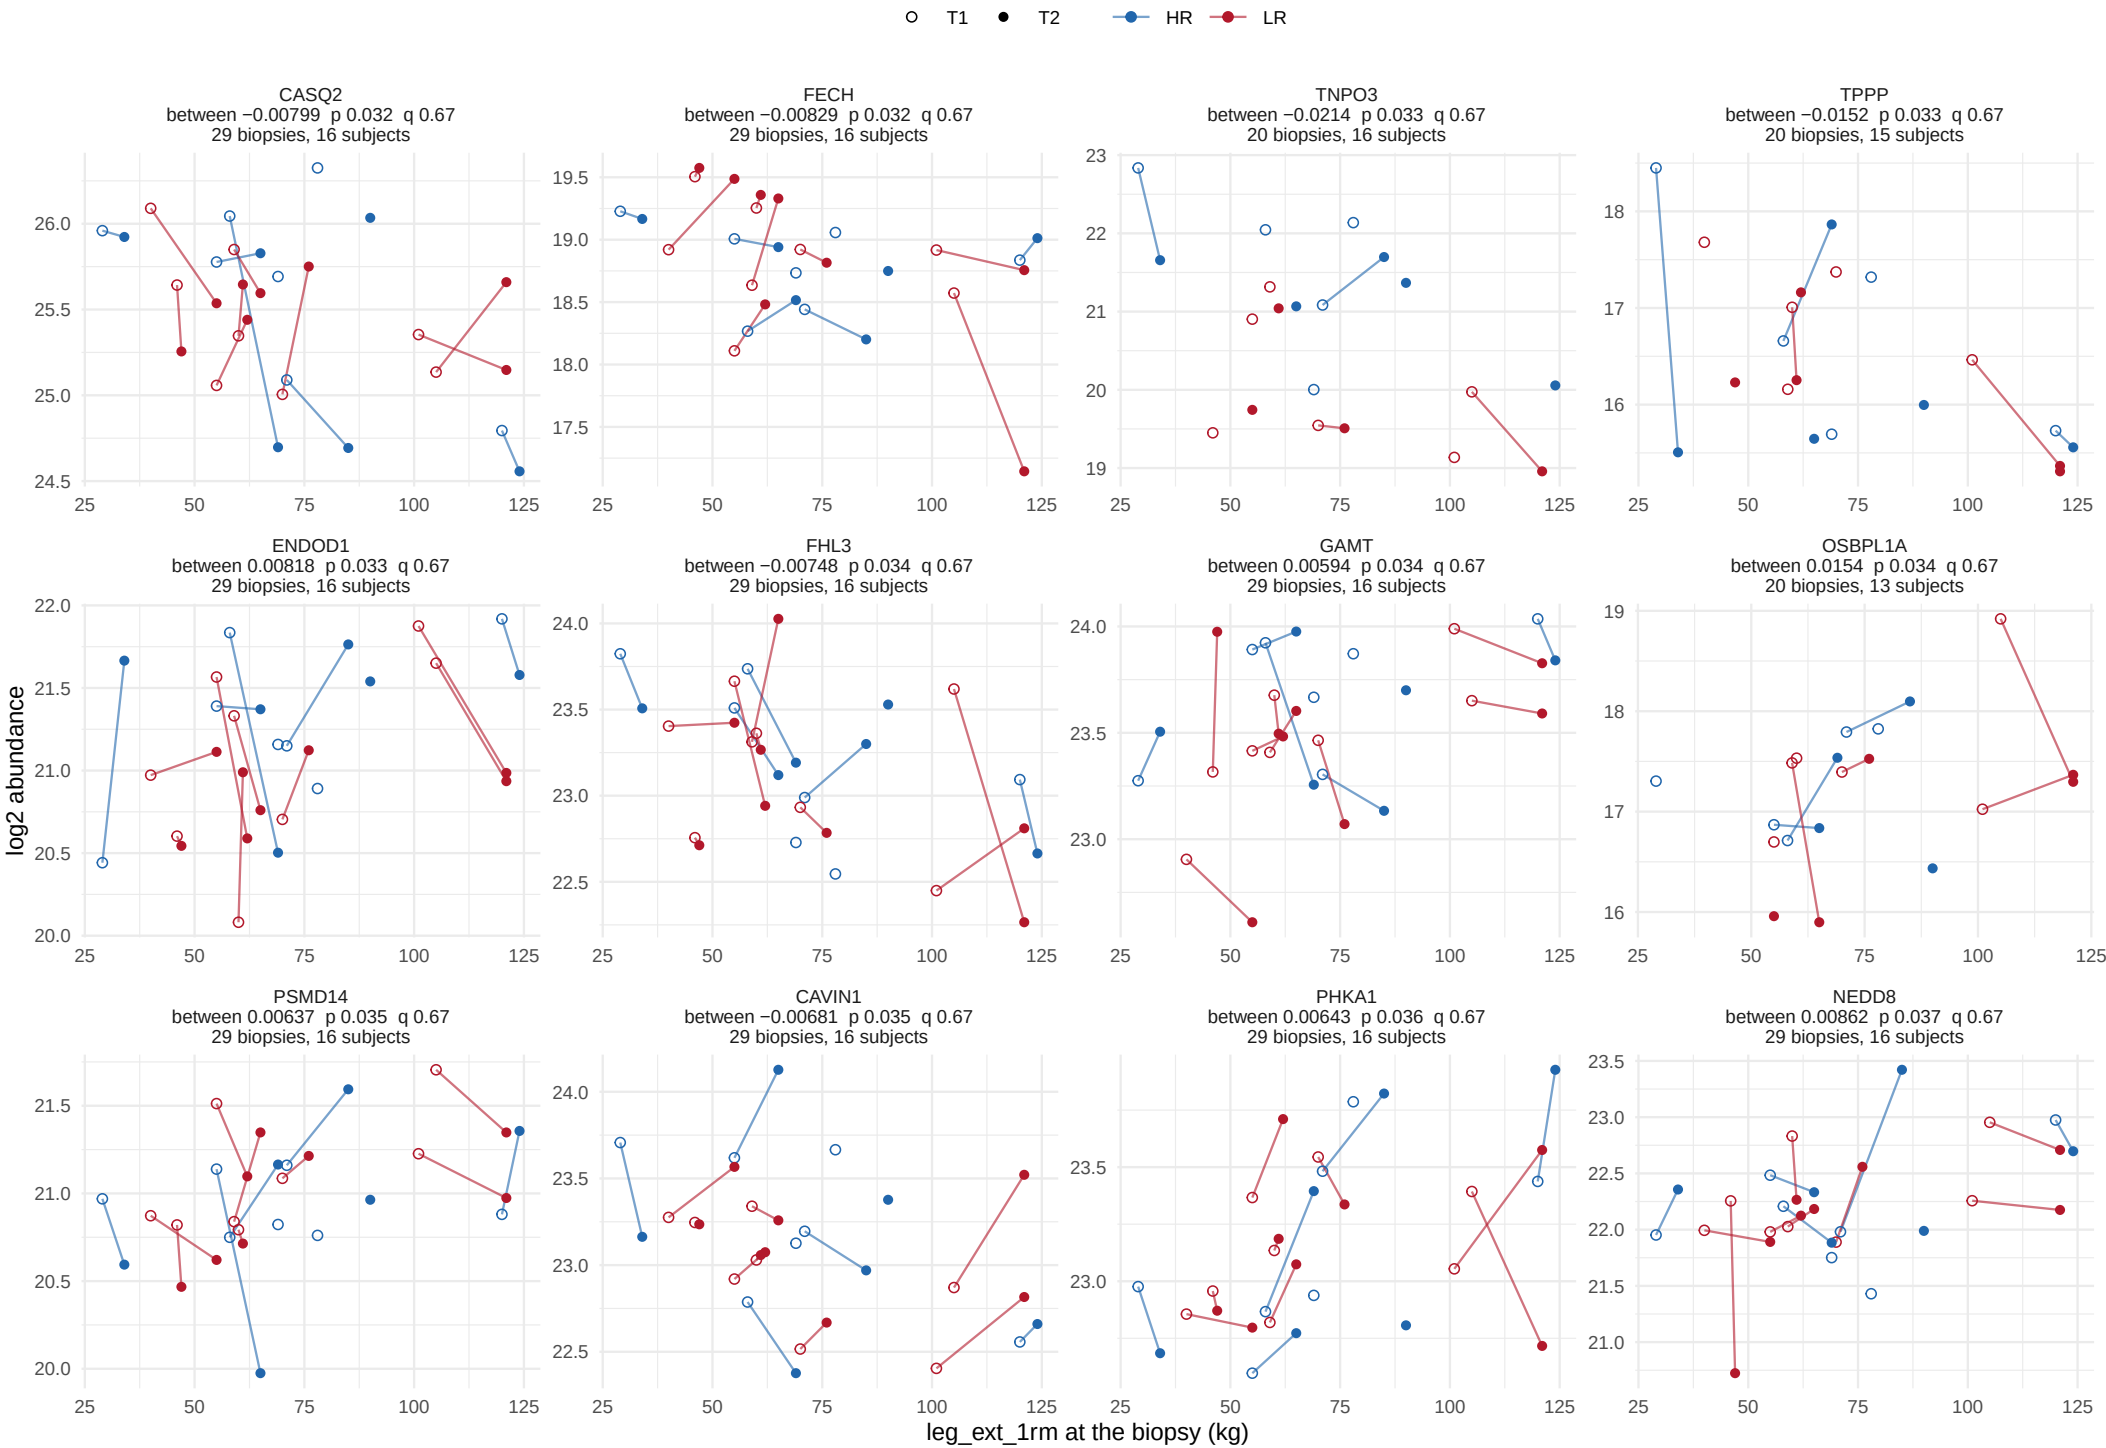

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_ext_1rm, between−person term


117 of 1615 proteins at p < 0.05, 0 at BH < 0.05. Page 8 of 10.

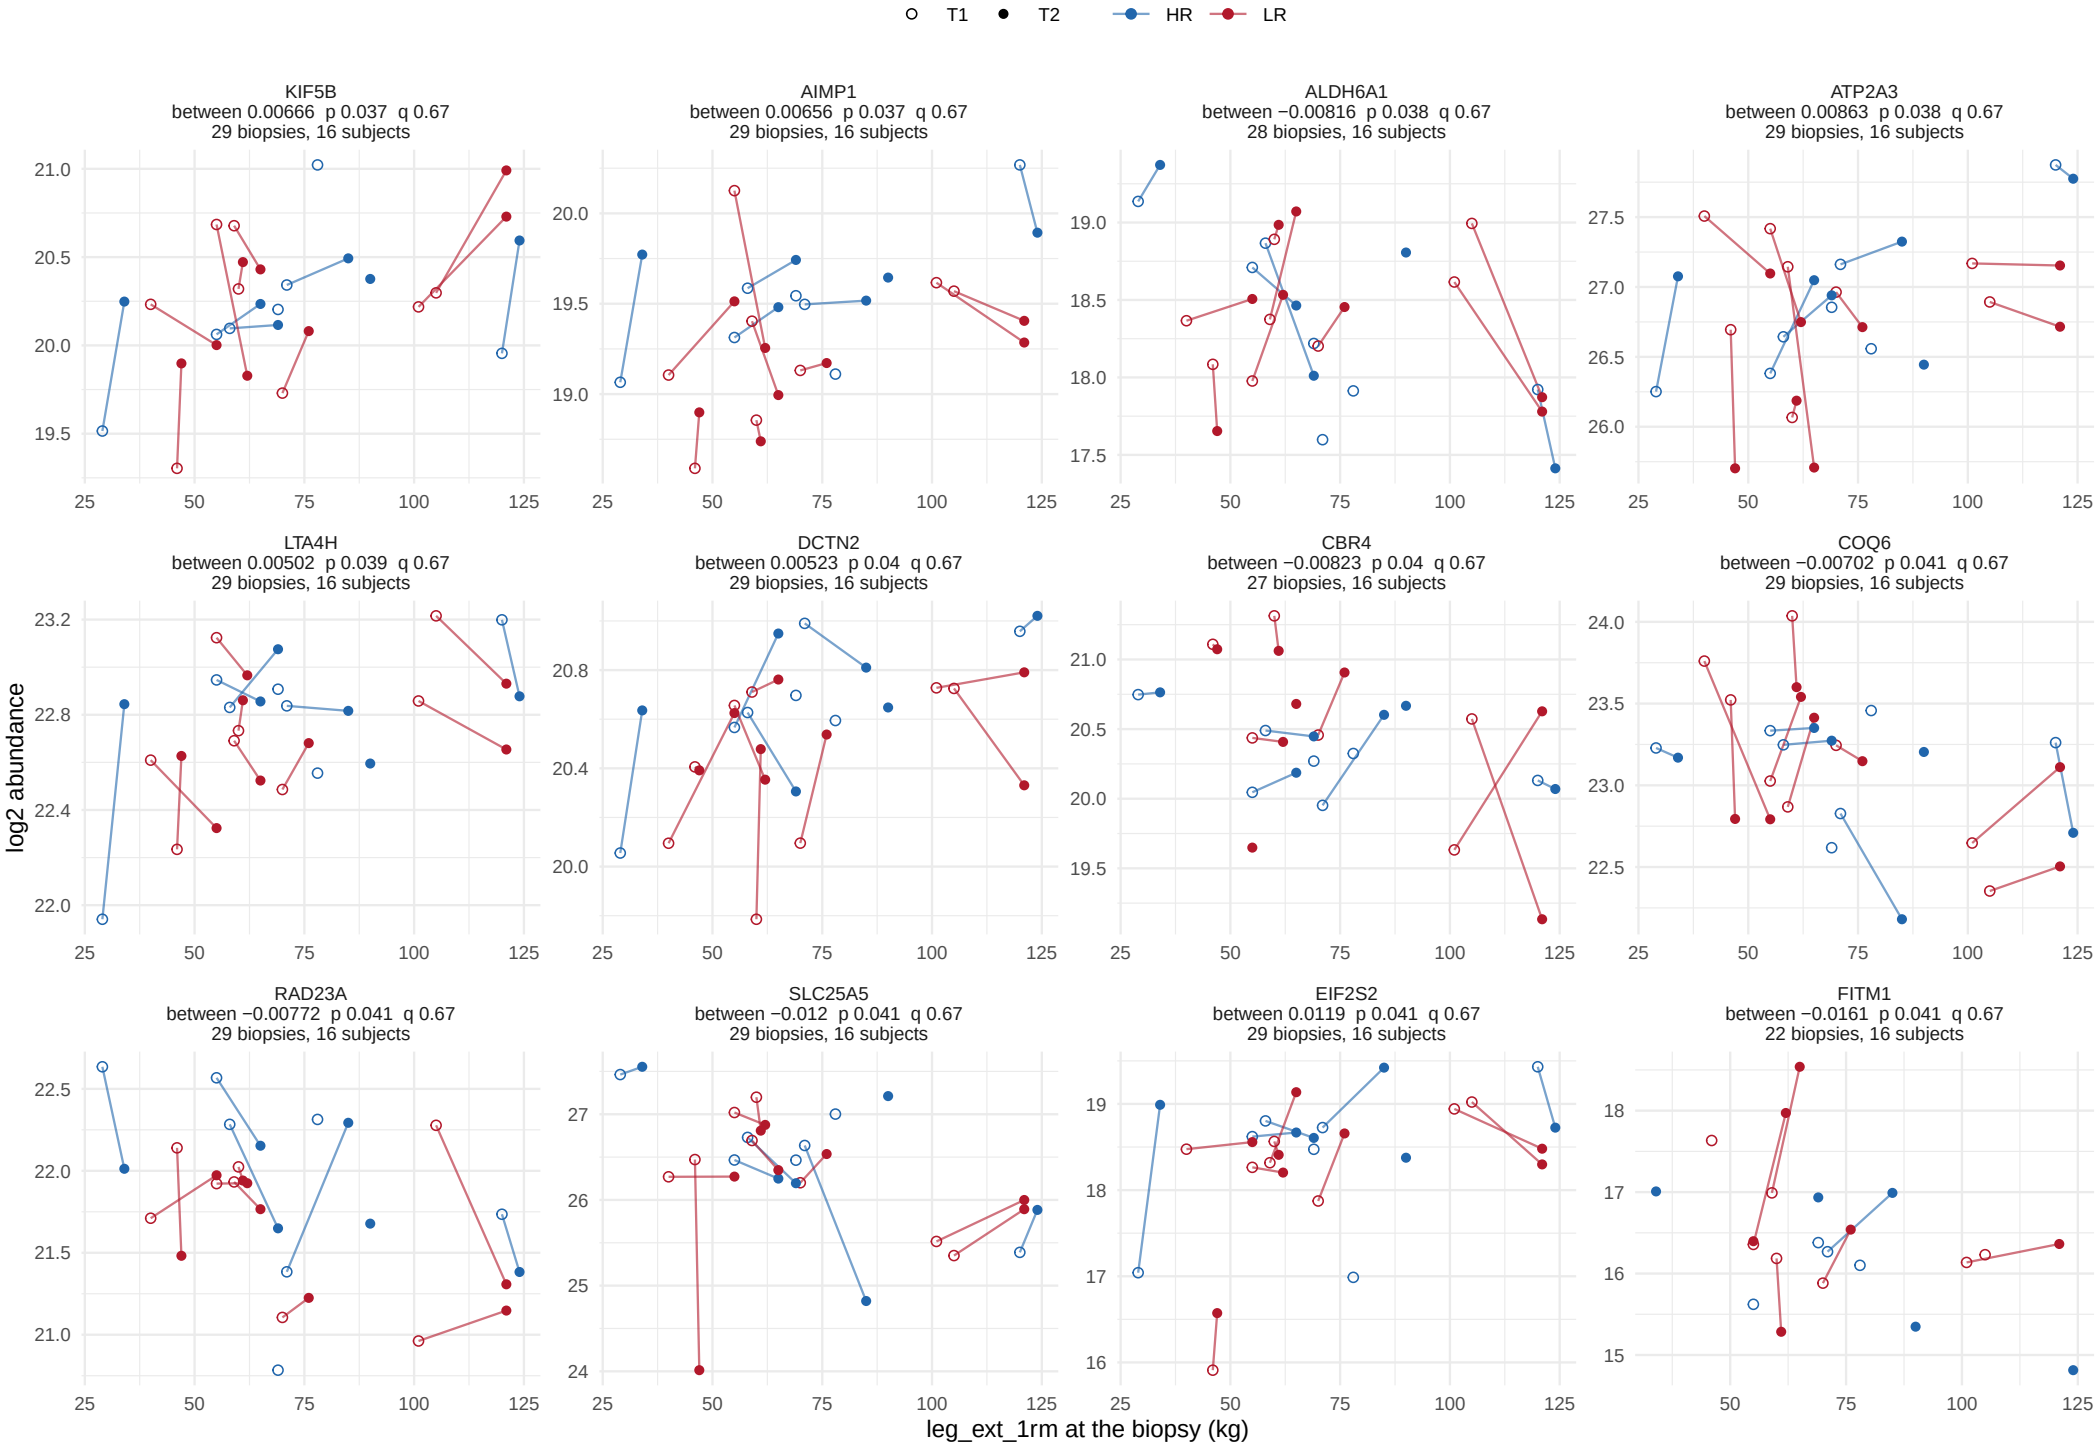

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_ext_1rm, between−person term

117 of 1615 proteins at p < 0.05, 0 at BH < 0.05. Page 9 of 10.

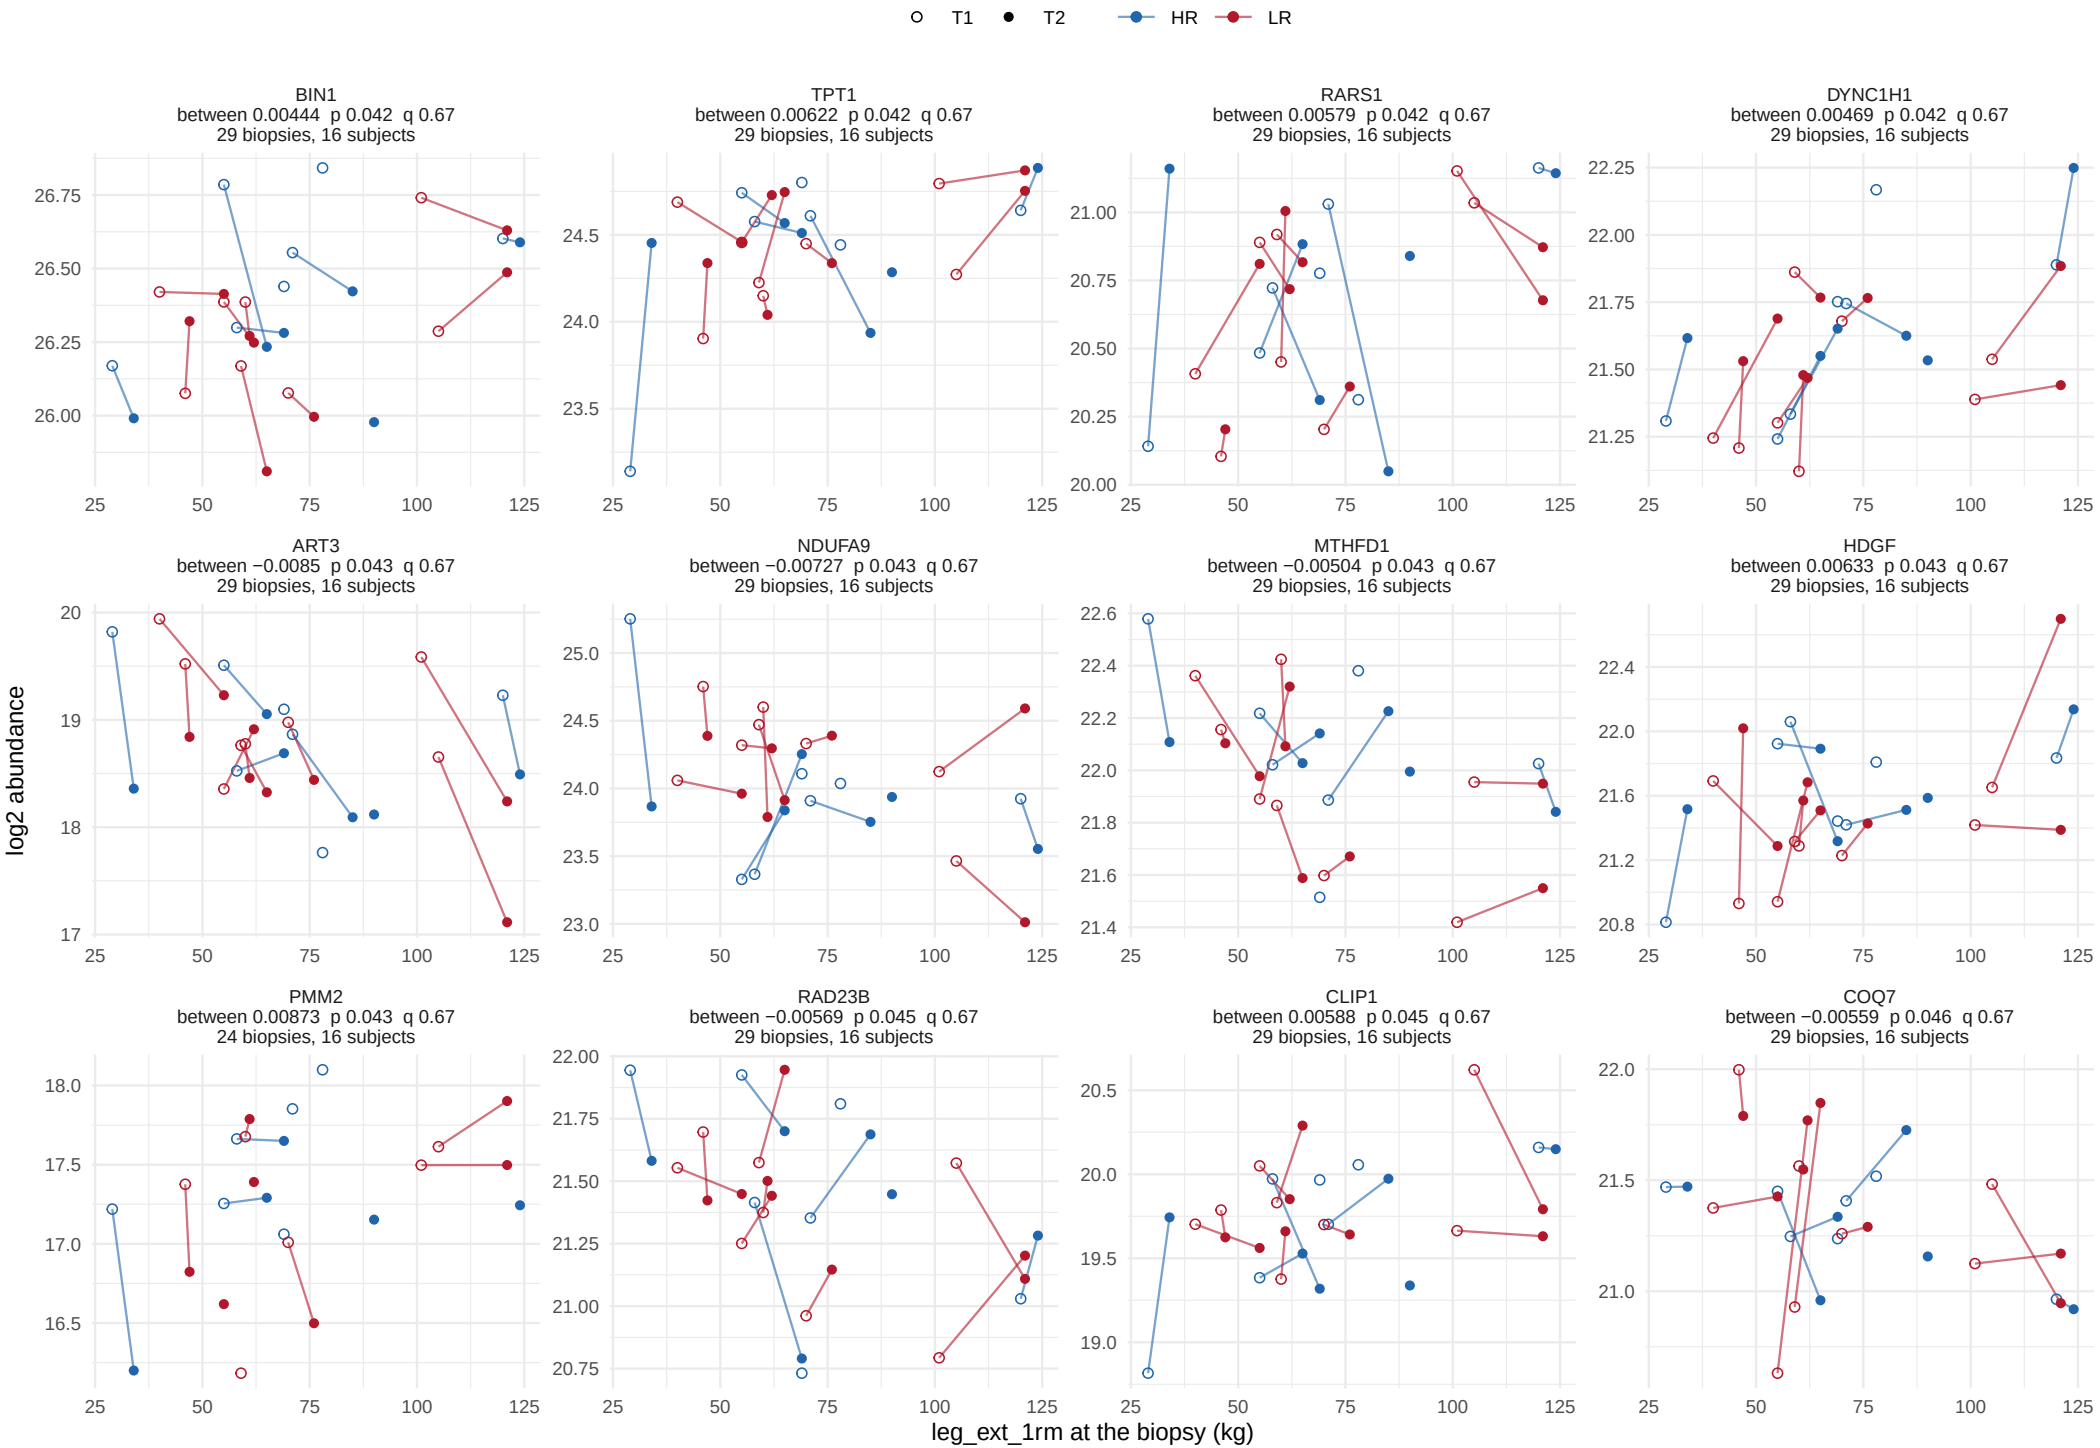

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_ext_1rm, between−person term


117 of 1615 proteins at p < 0.05, 0 at BH < 0.05. Page 10 of 10.



limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

Change score, training window


502 of 11286 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 1 of 42.

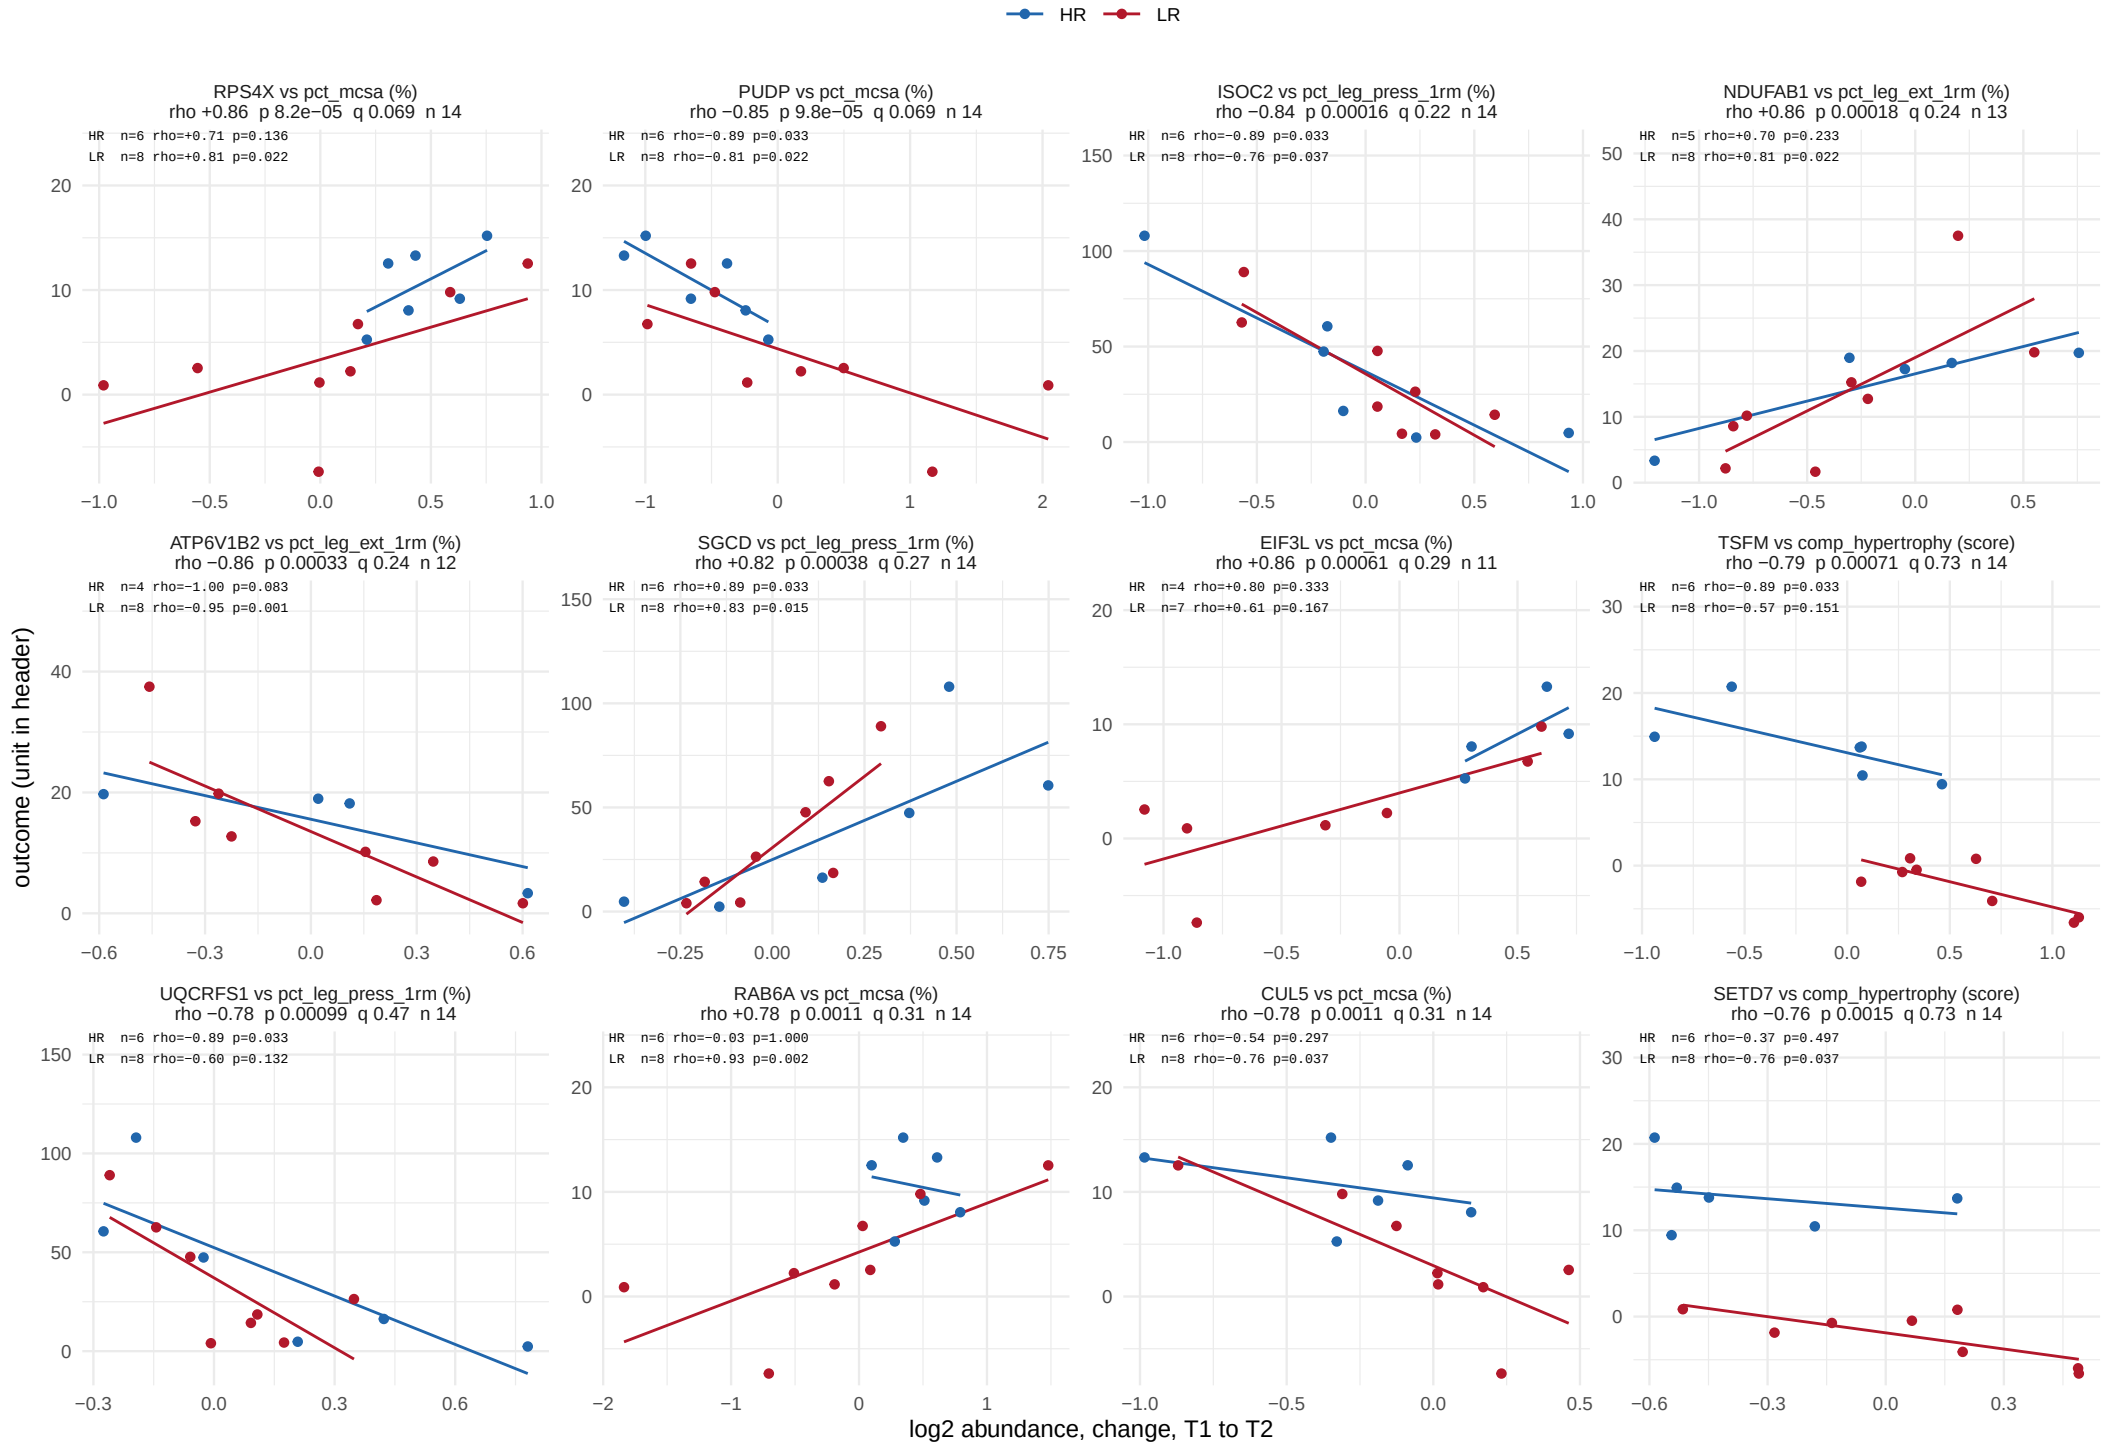

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


502 of 11286 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 2 of 42.

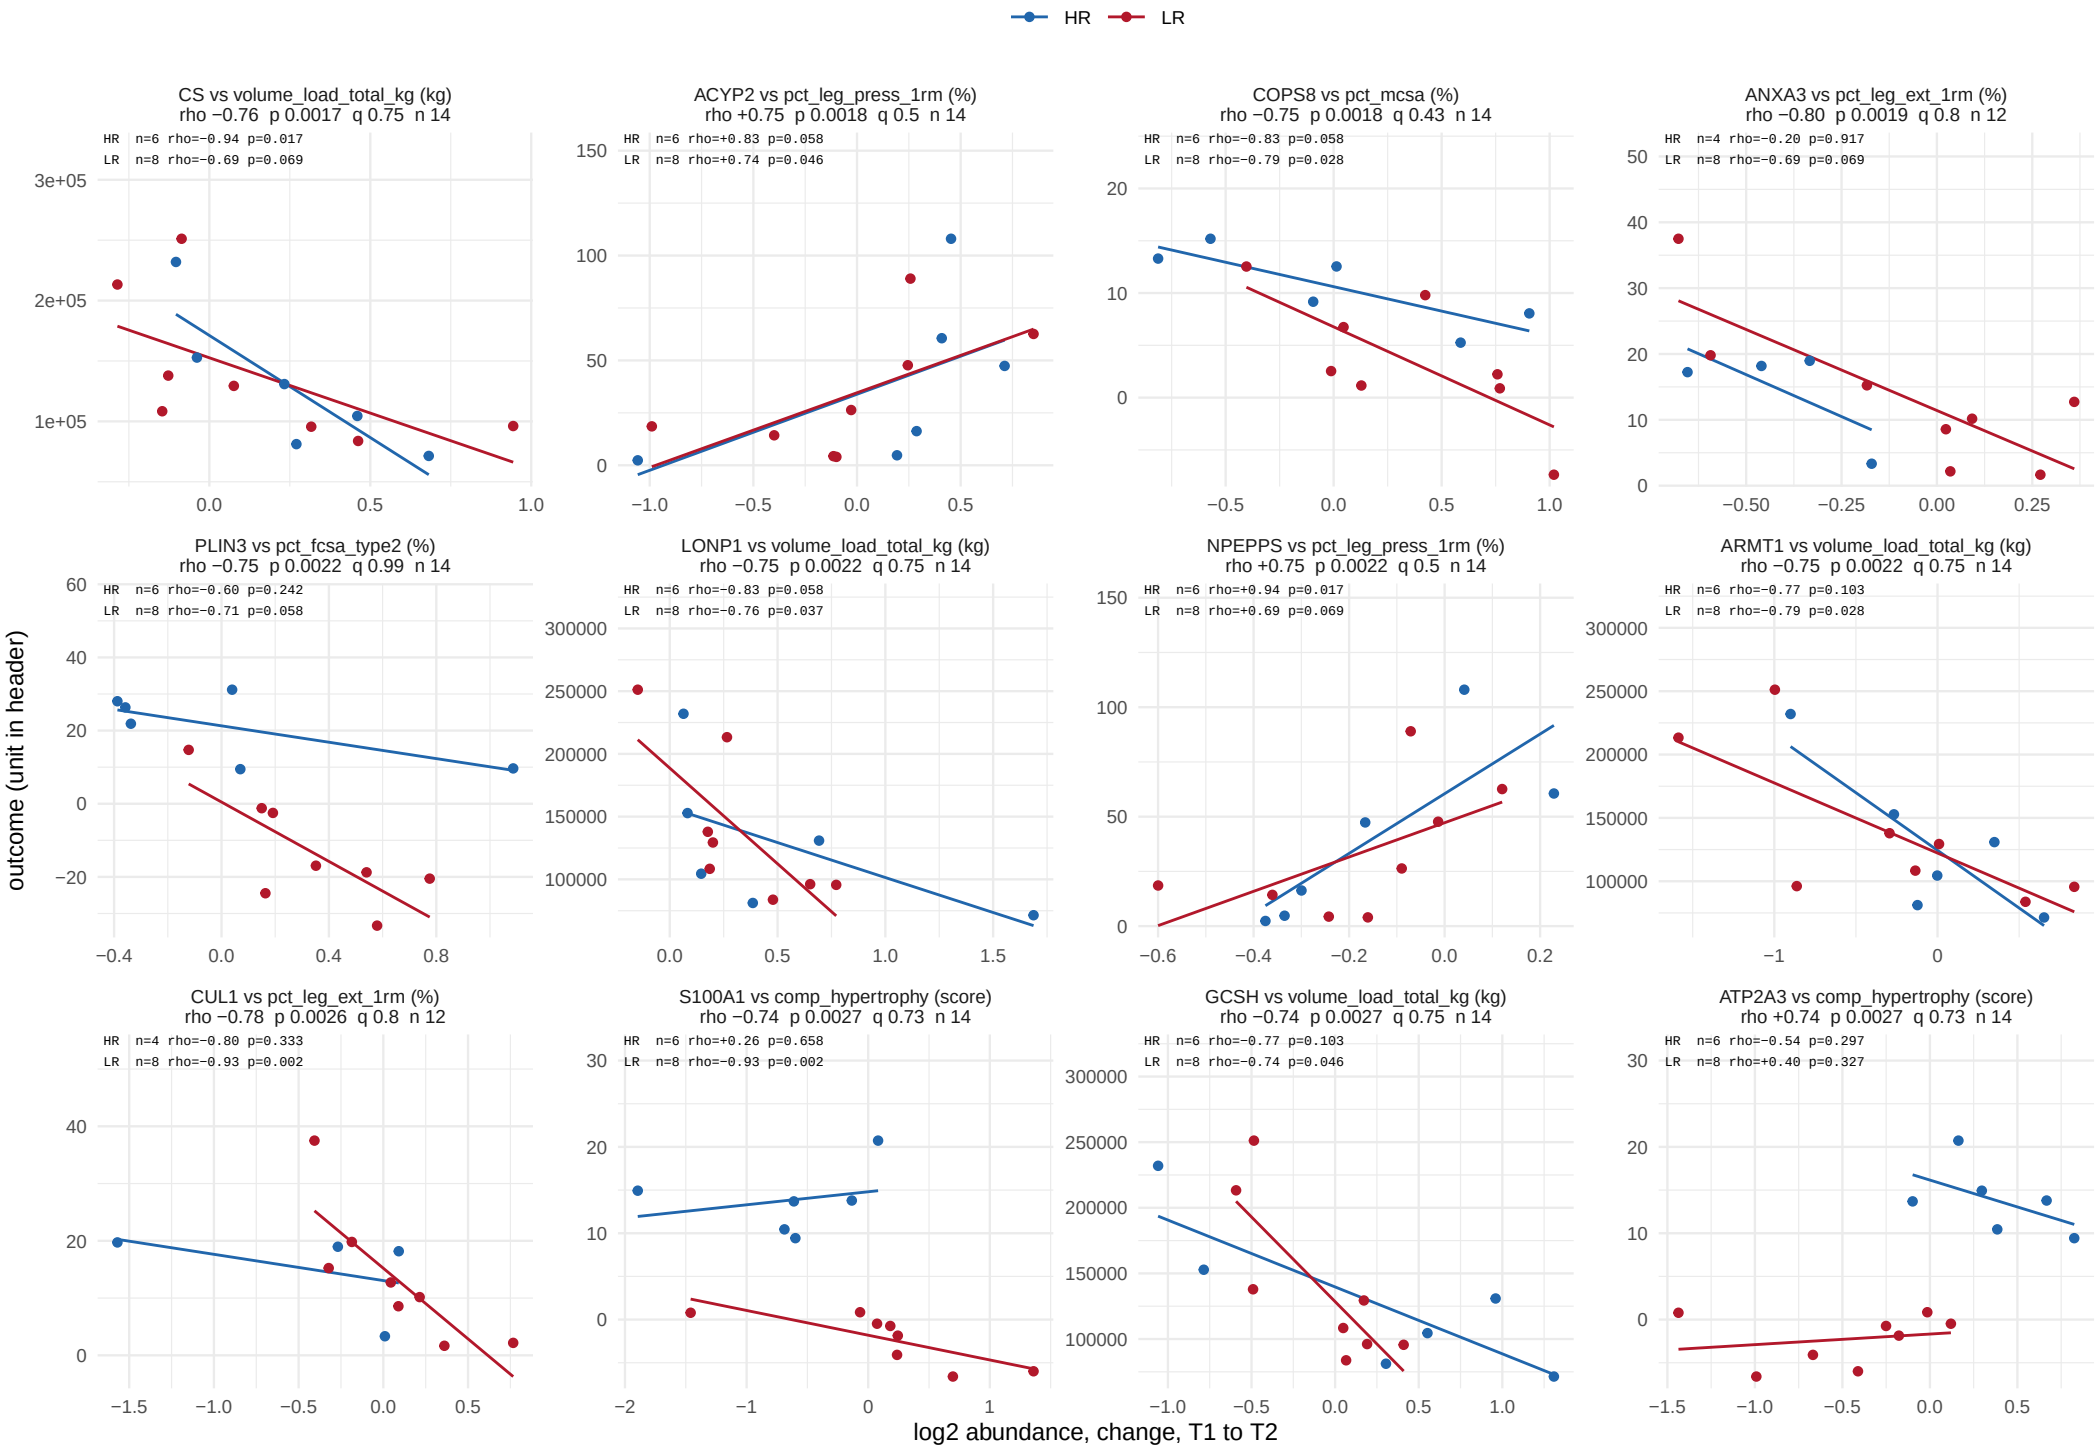

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


502 of 11286 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 3 of 42.

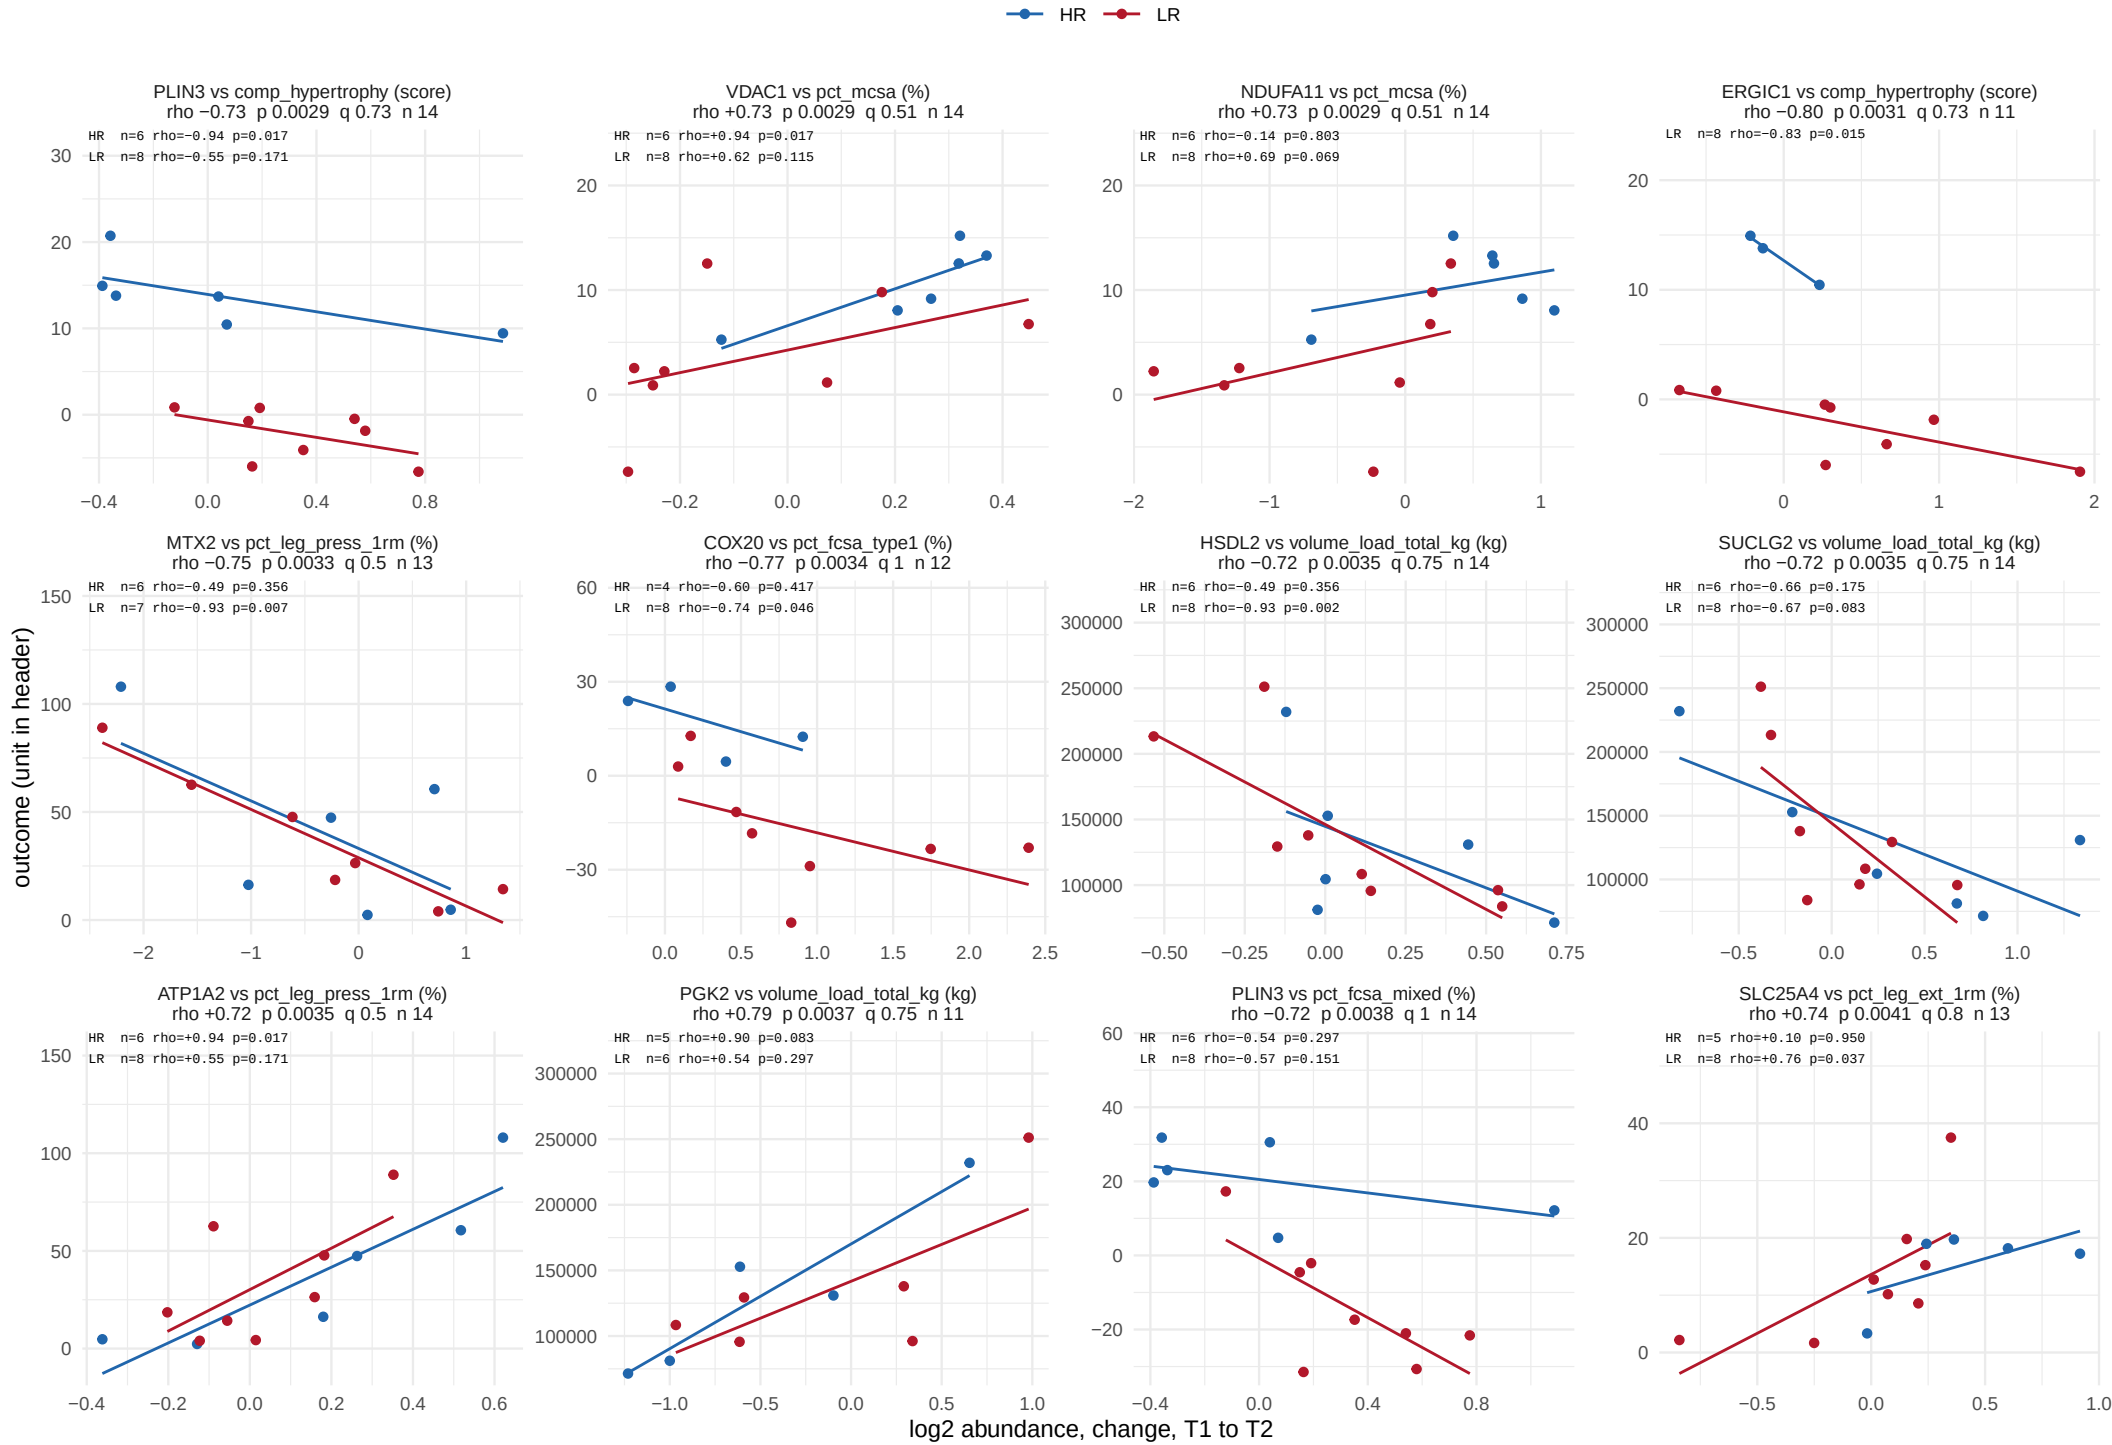

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


502 of 11286 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 4 of 42.

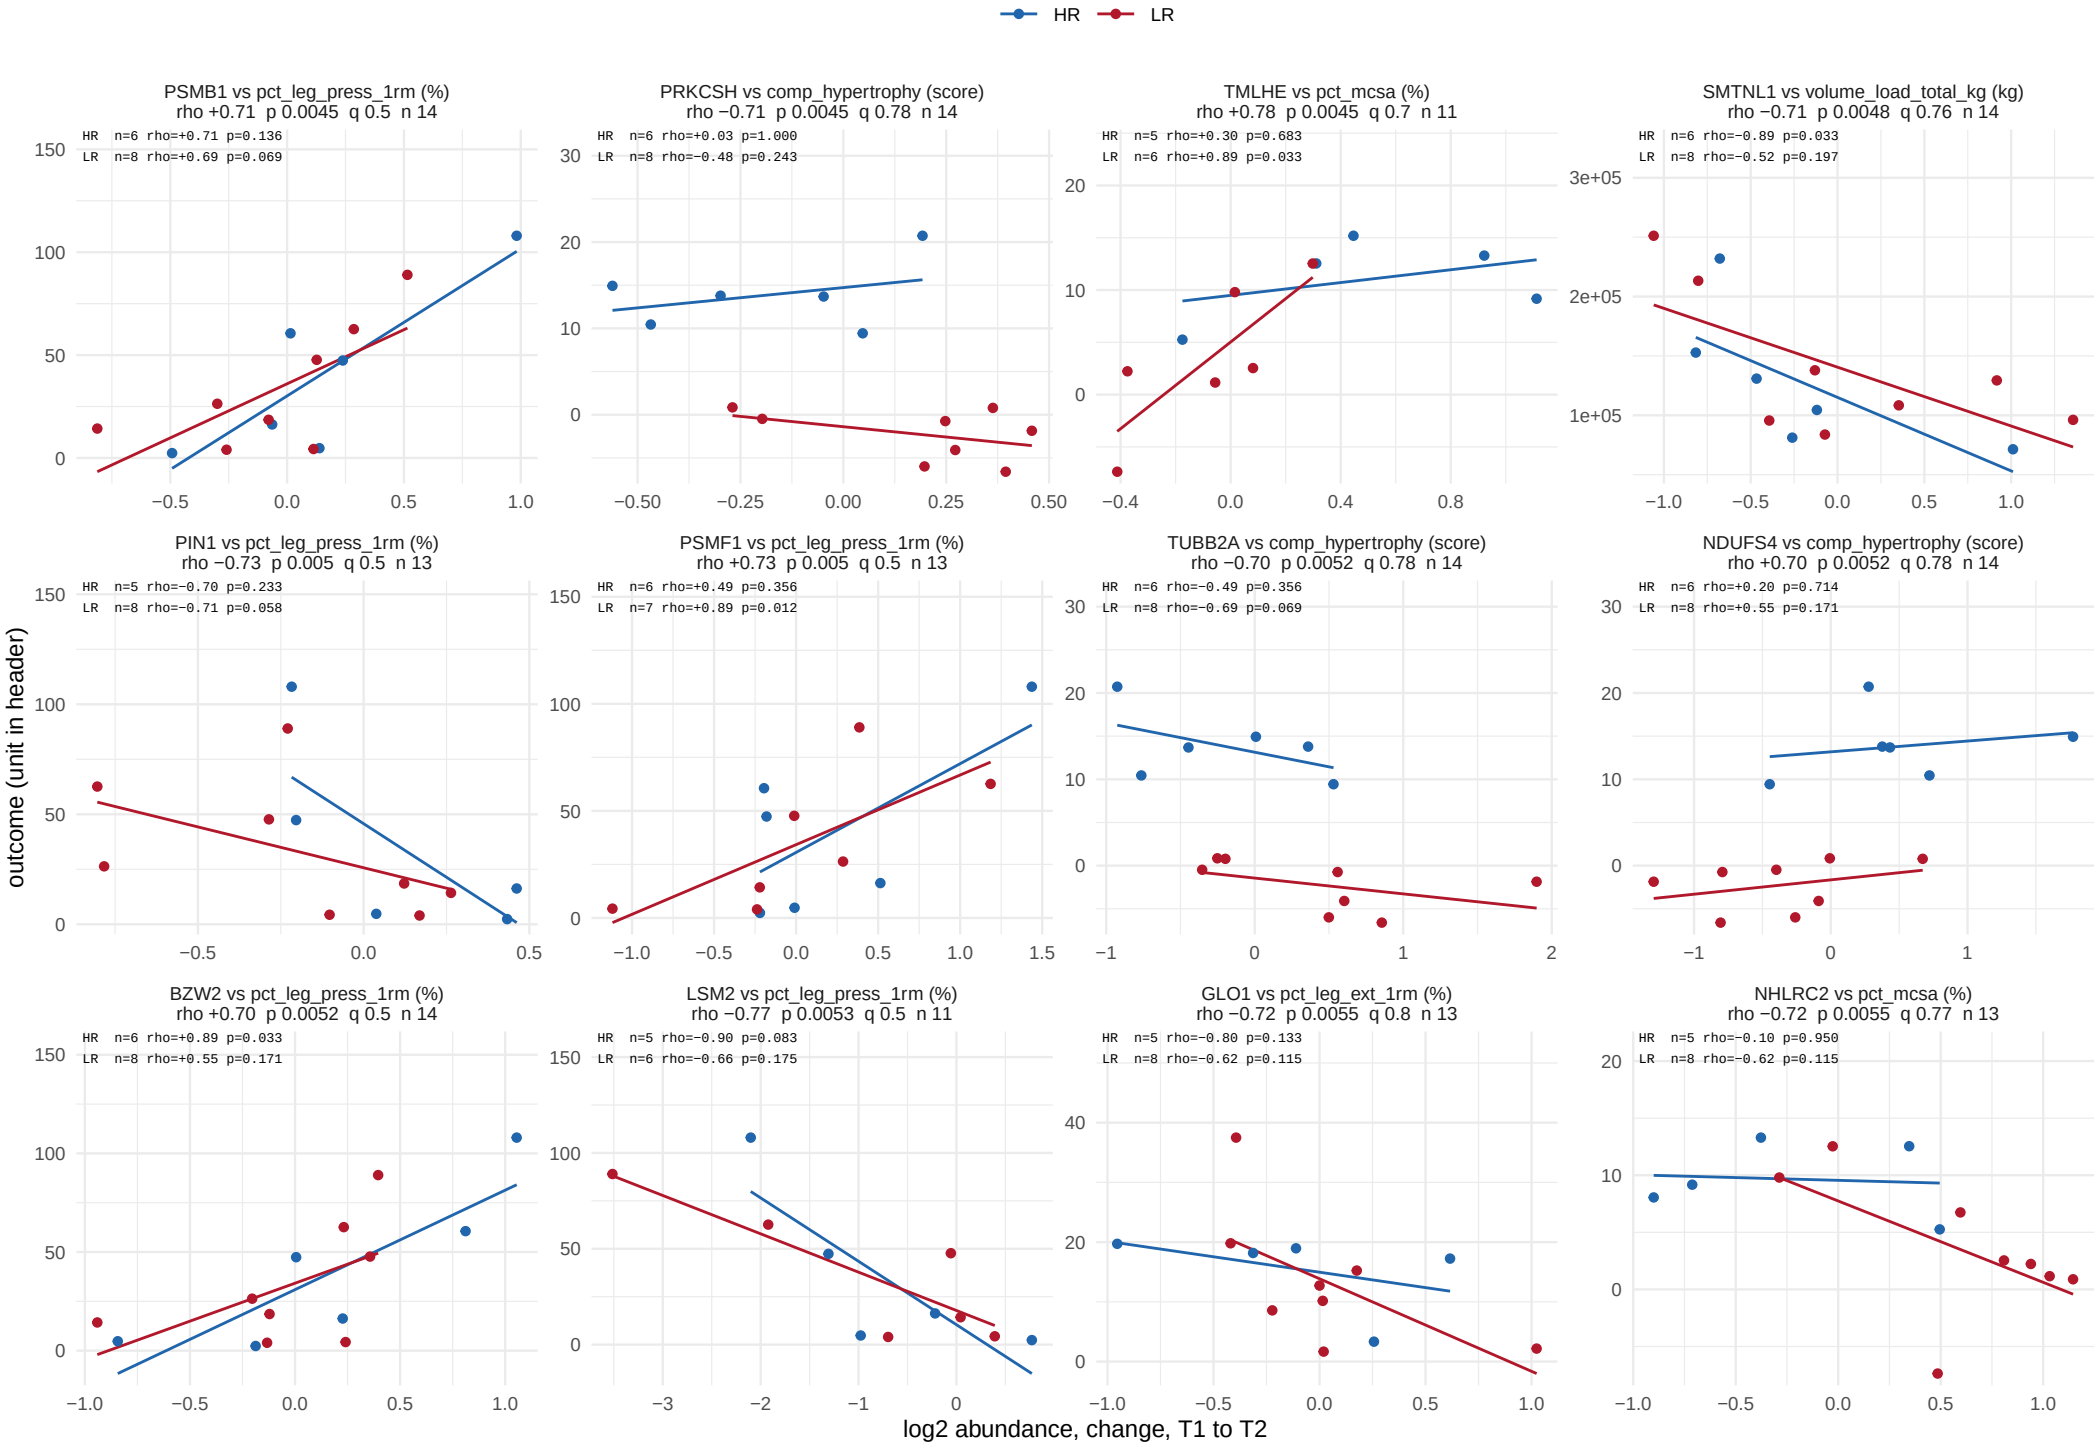

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


502 of 11286 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 5 of 42.

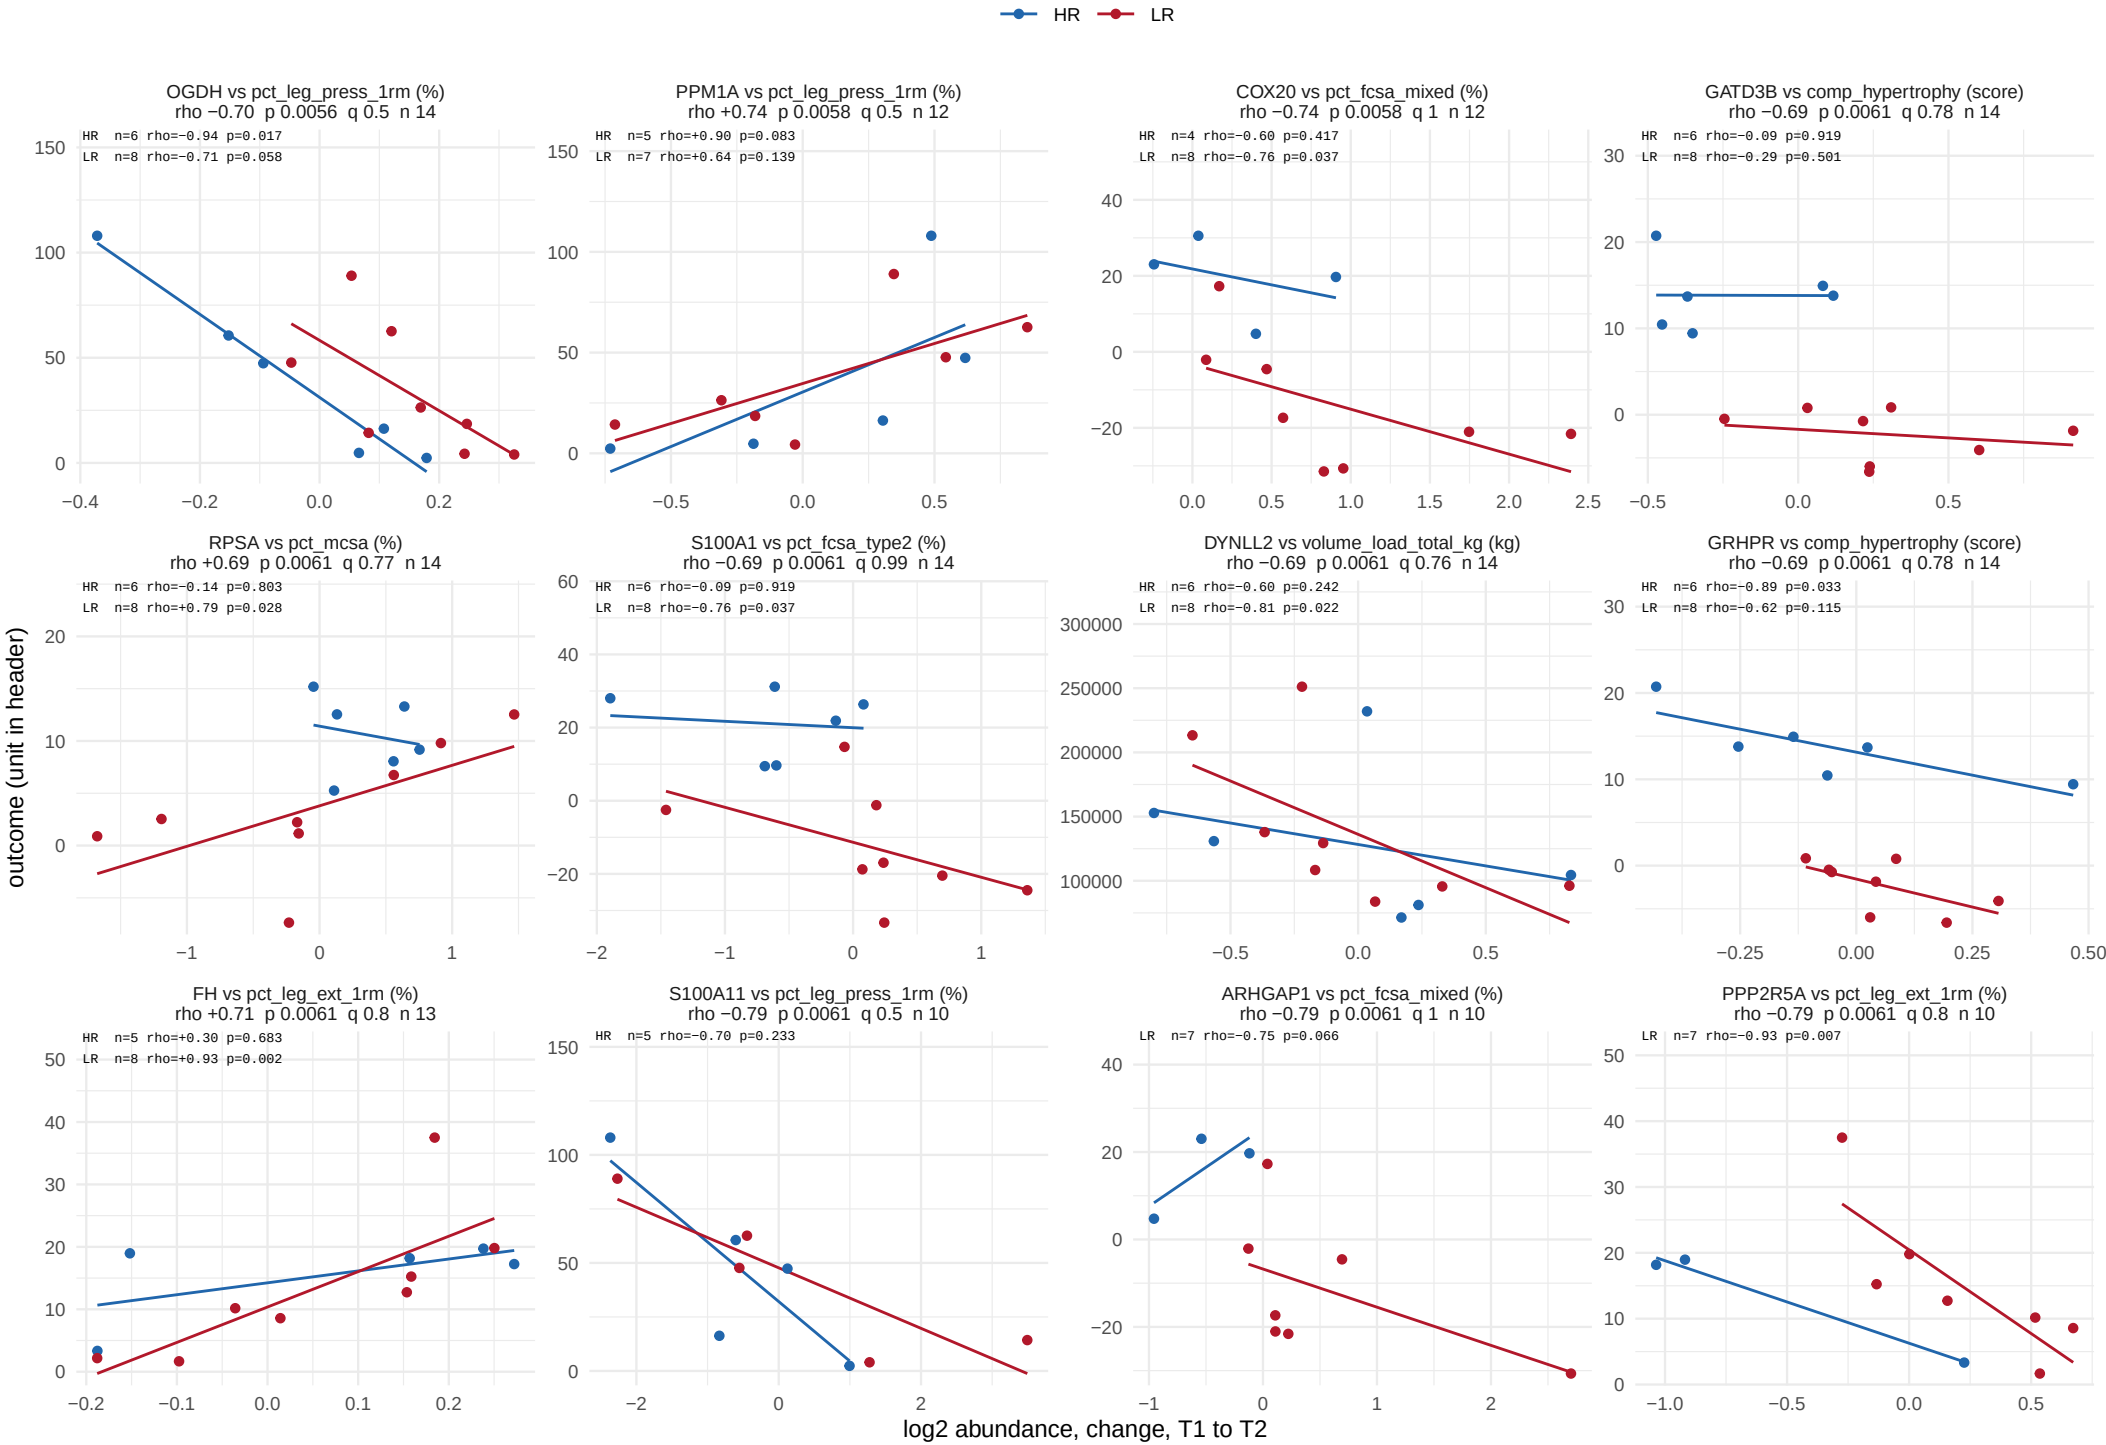

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


502 of 11286 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 6 of 42.

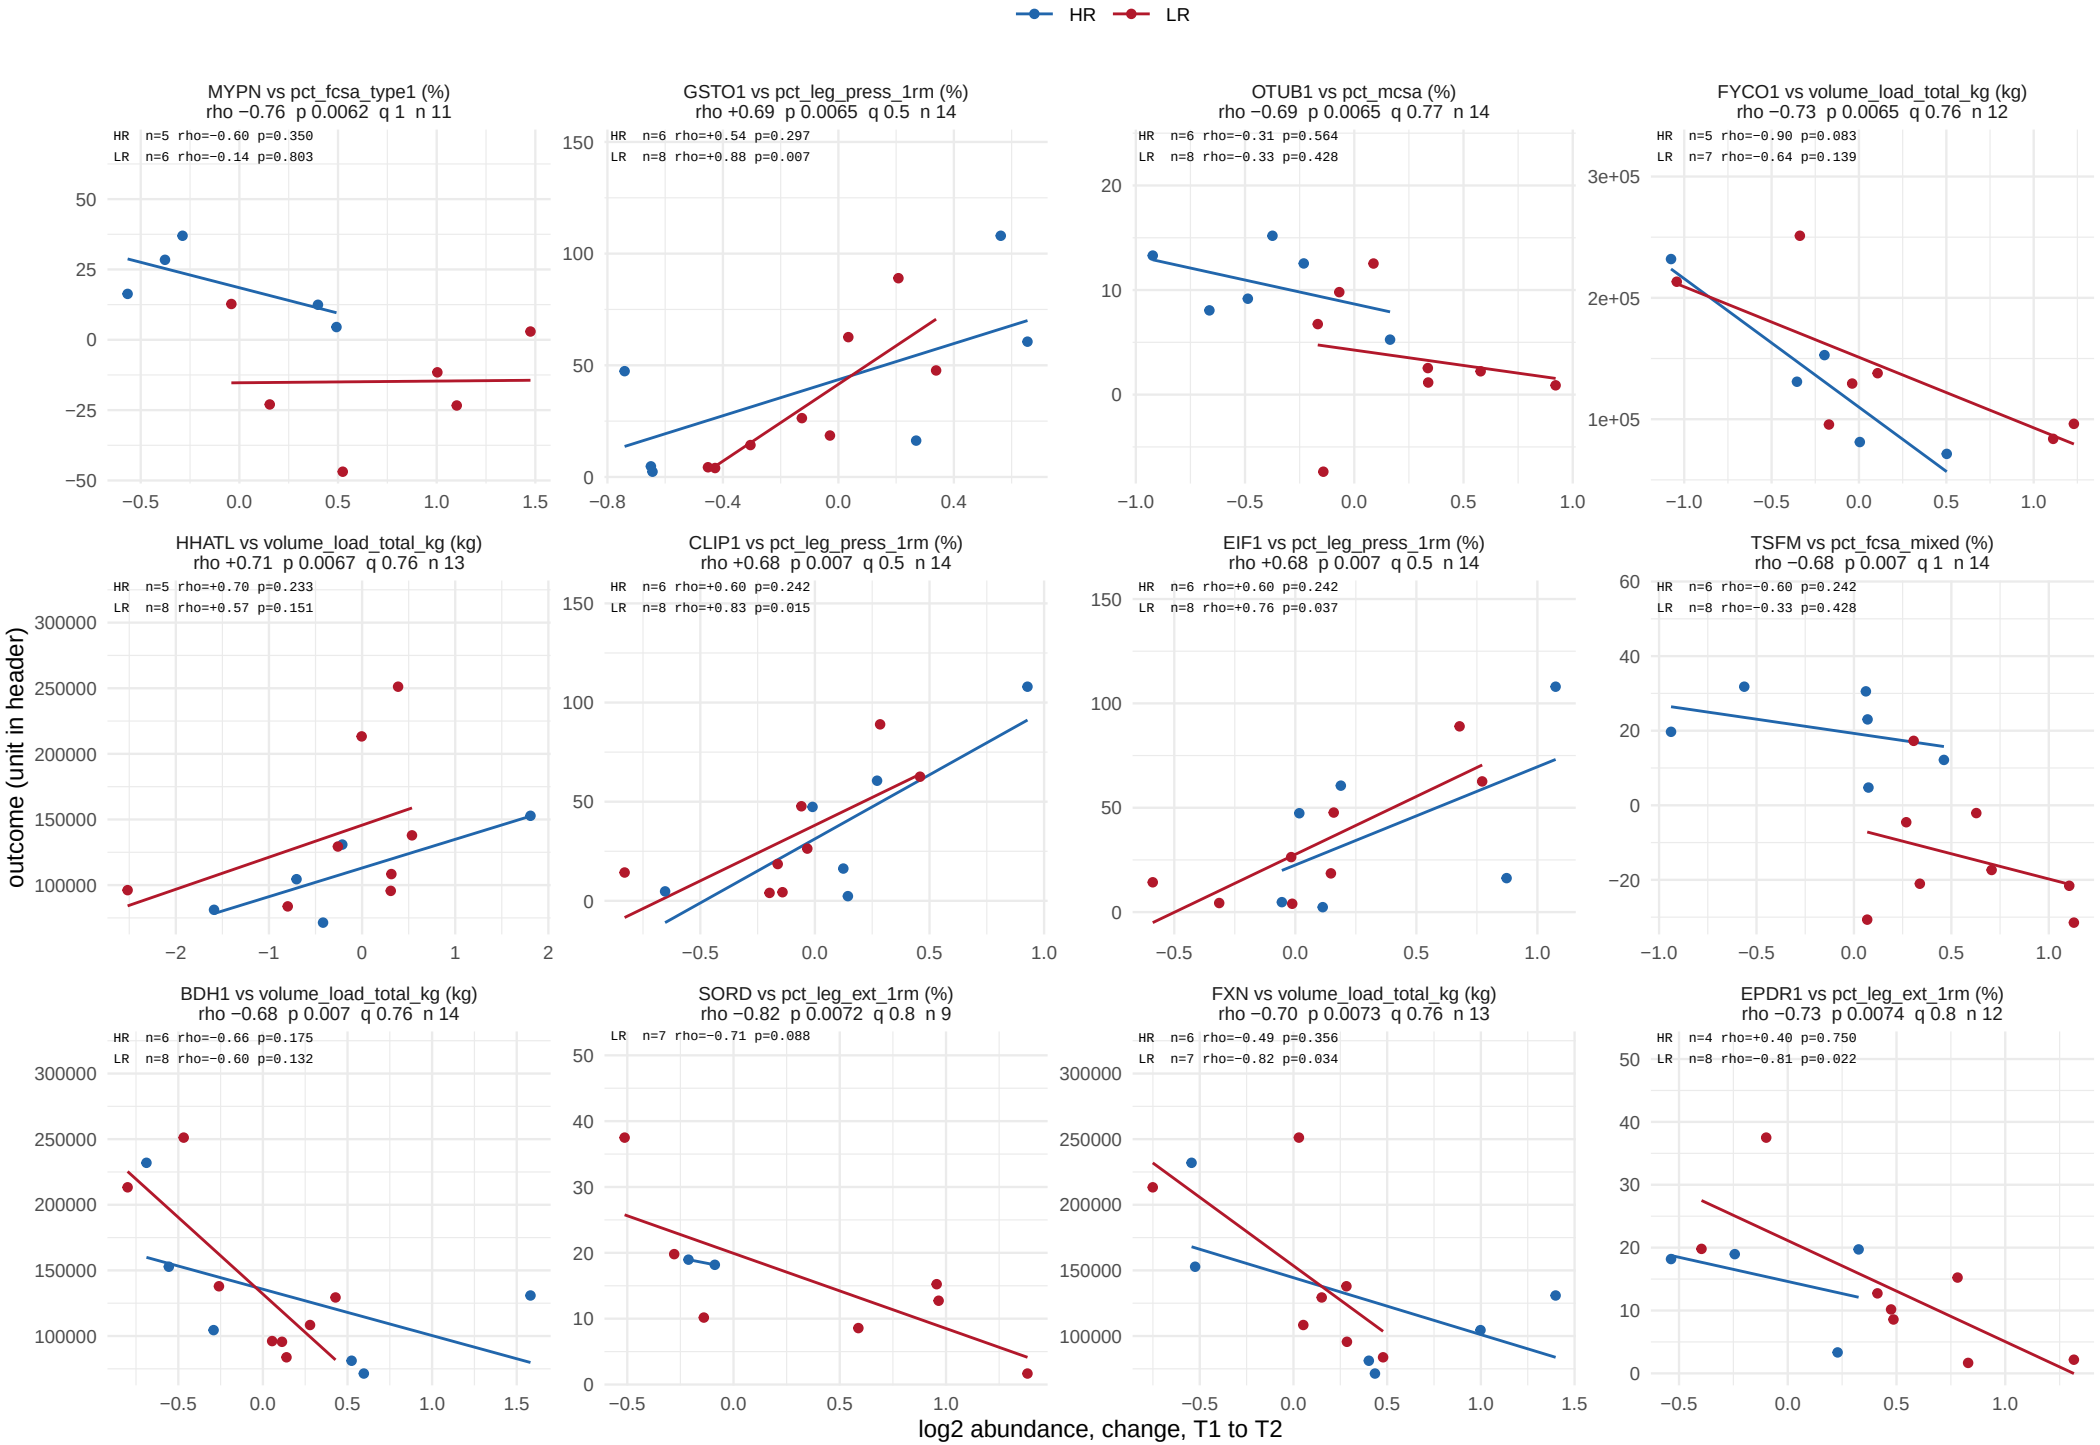

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window

502 of 11286 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 7 of 42.

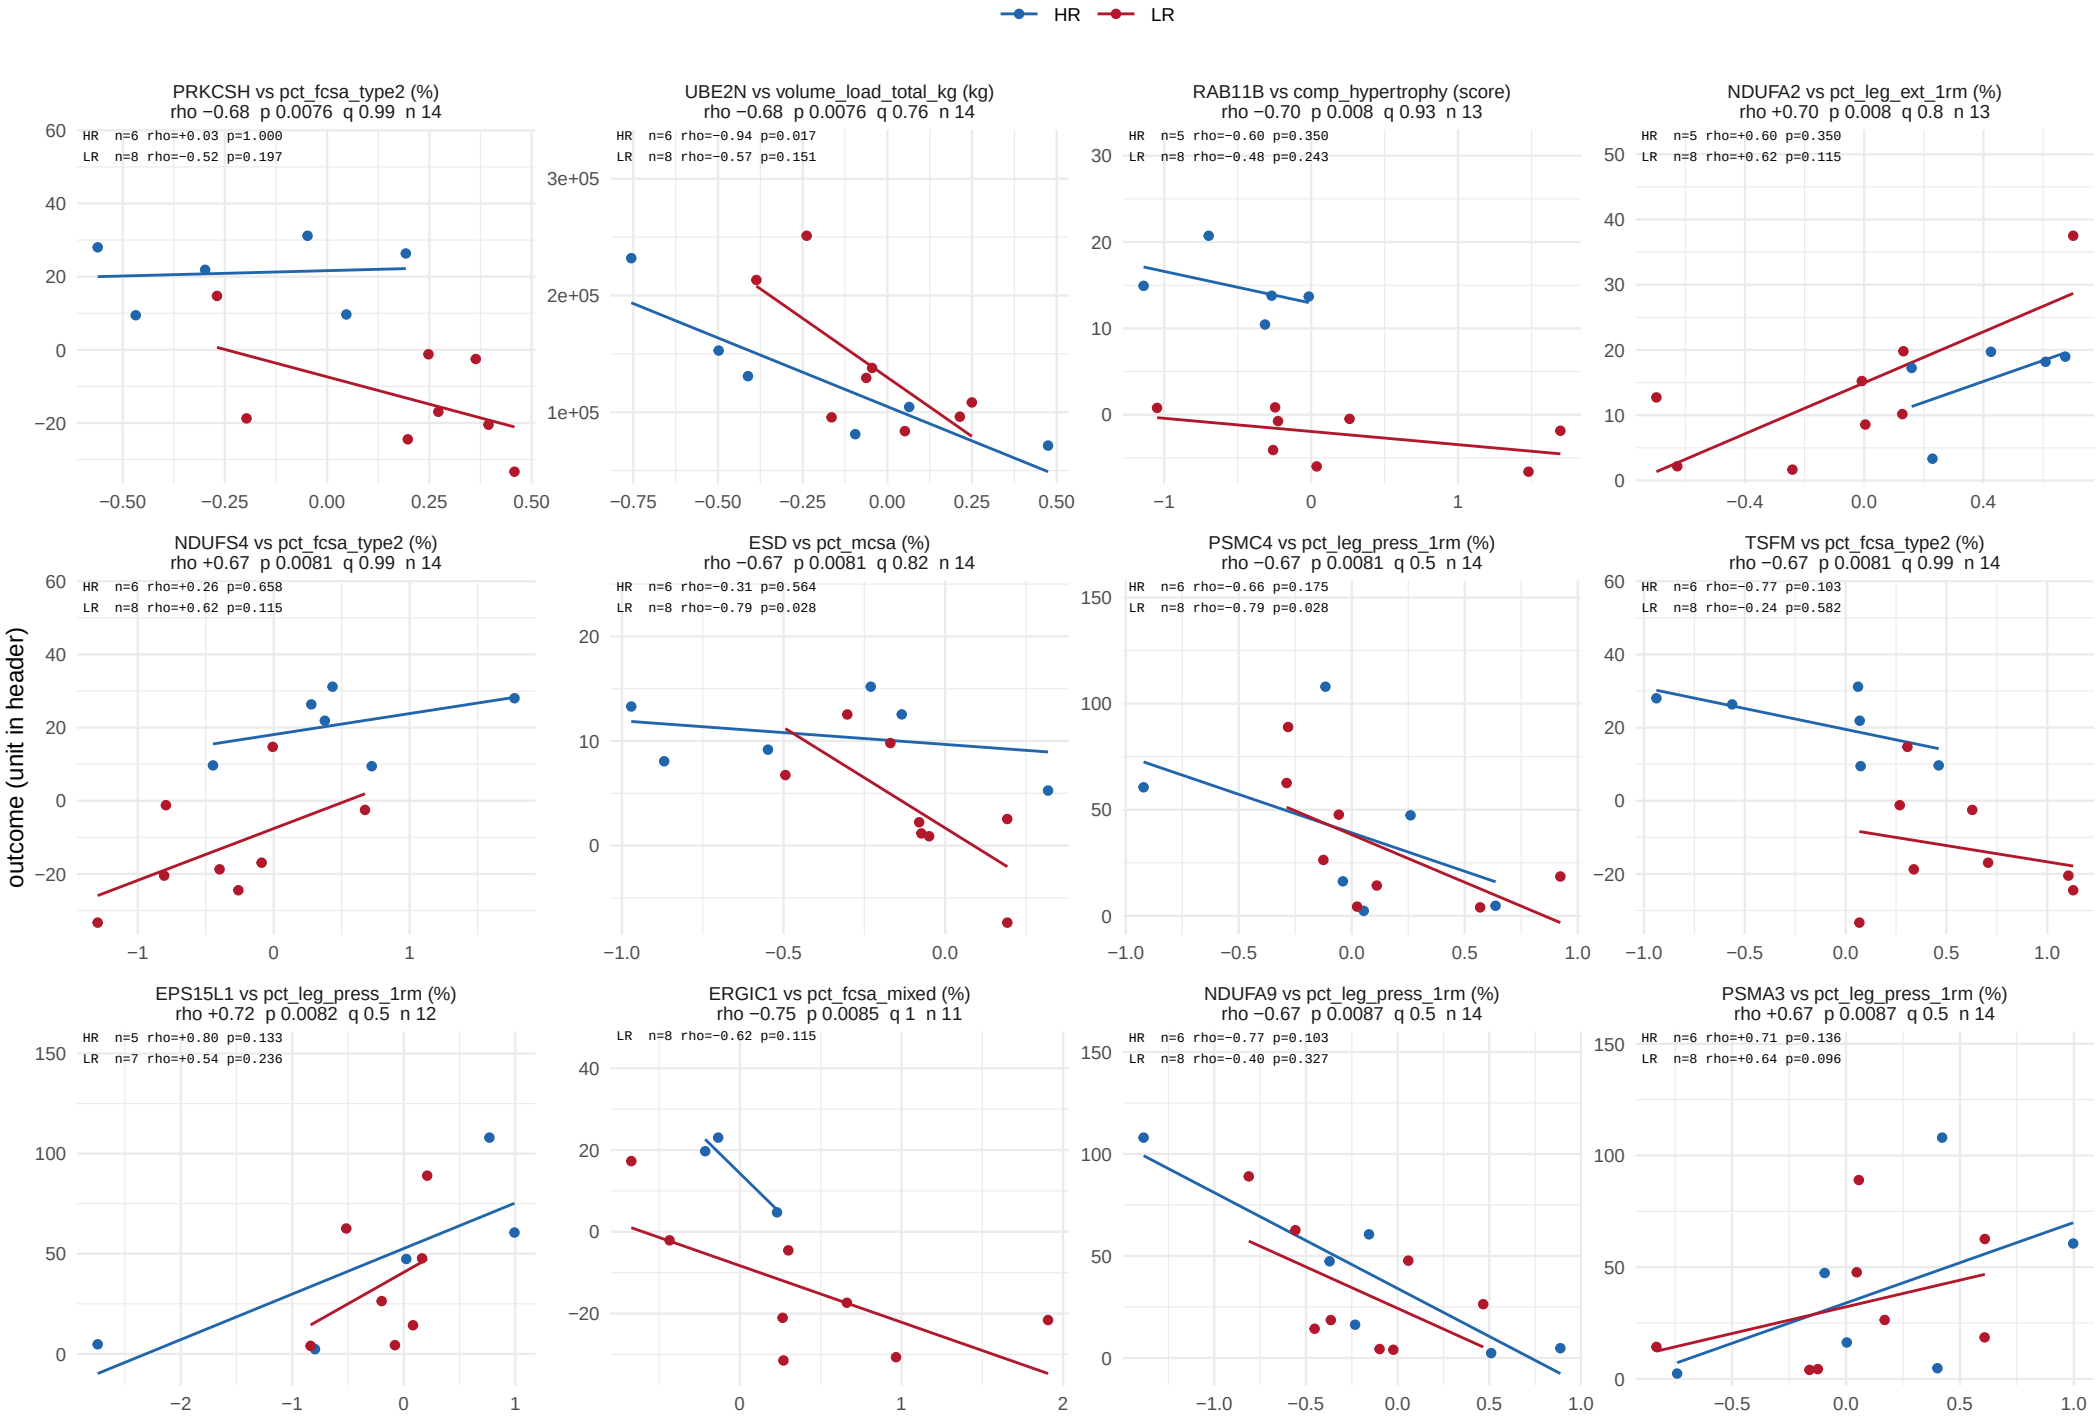

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


502 of 11286 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 8 of 42.



One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


502 of 11286 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 9 of 42.

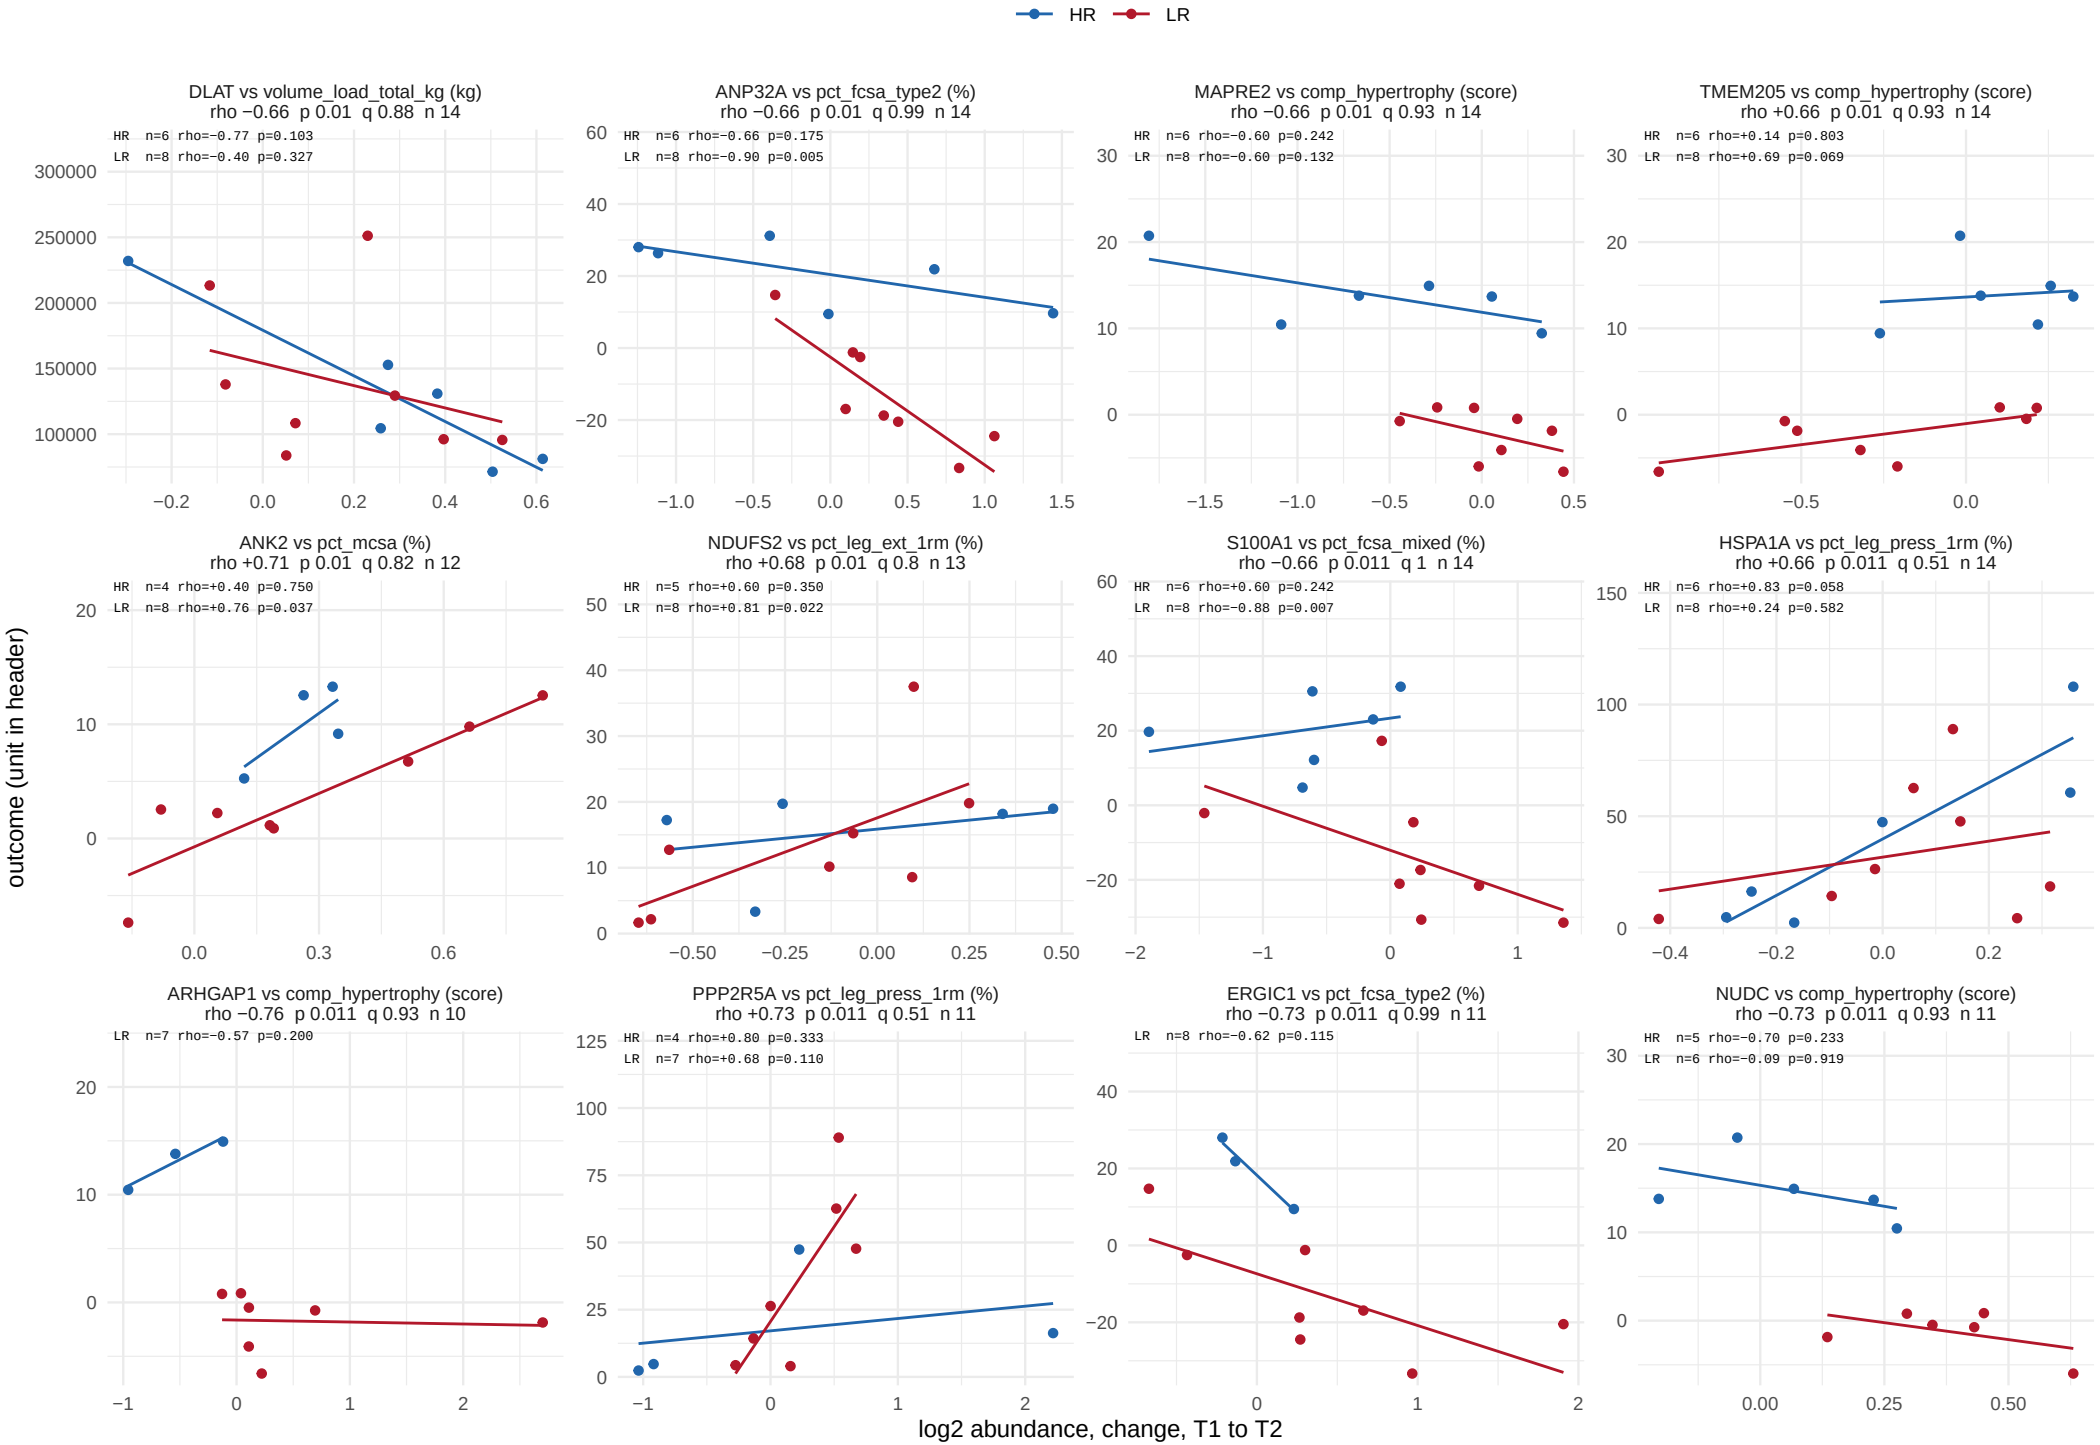

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


502 of 11286 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 10 of 42.

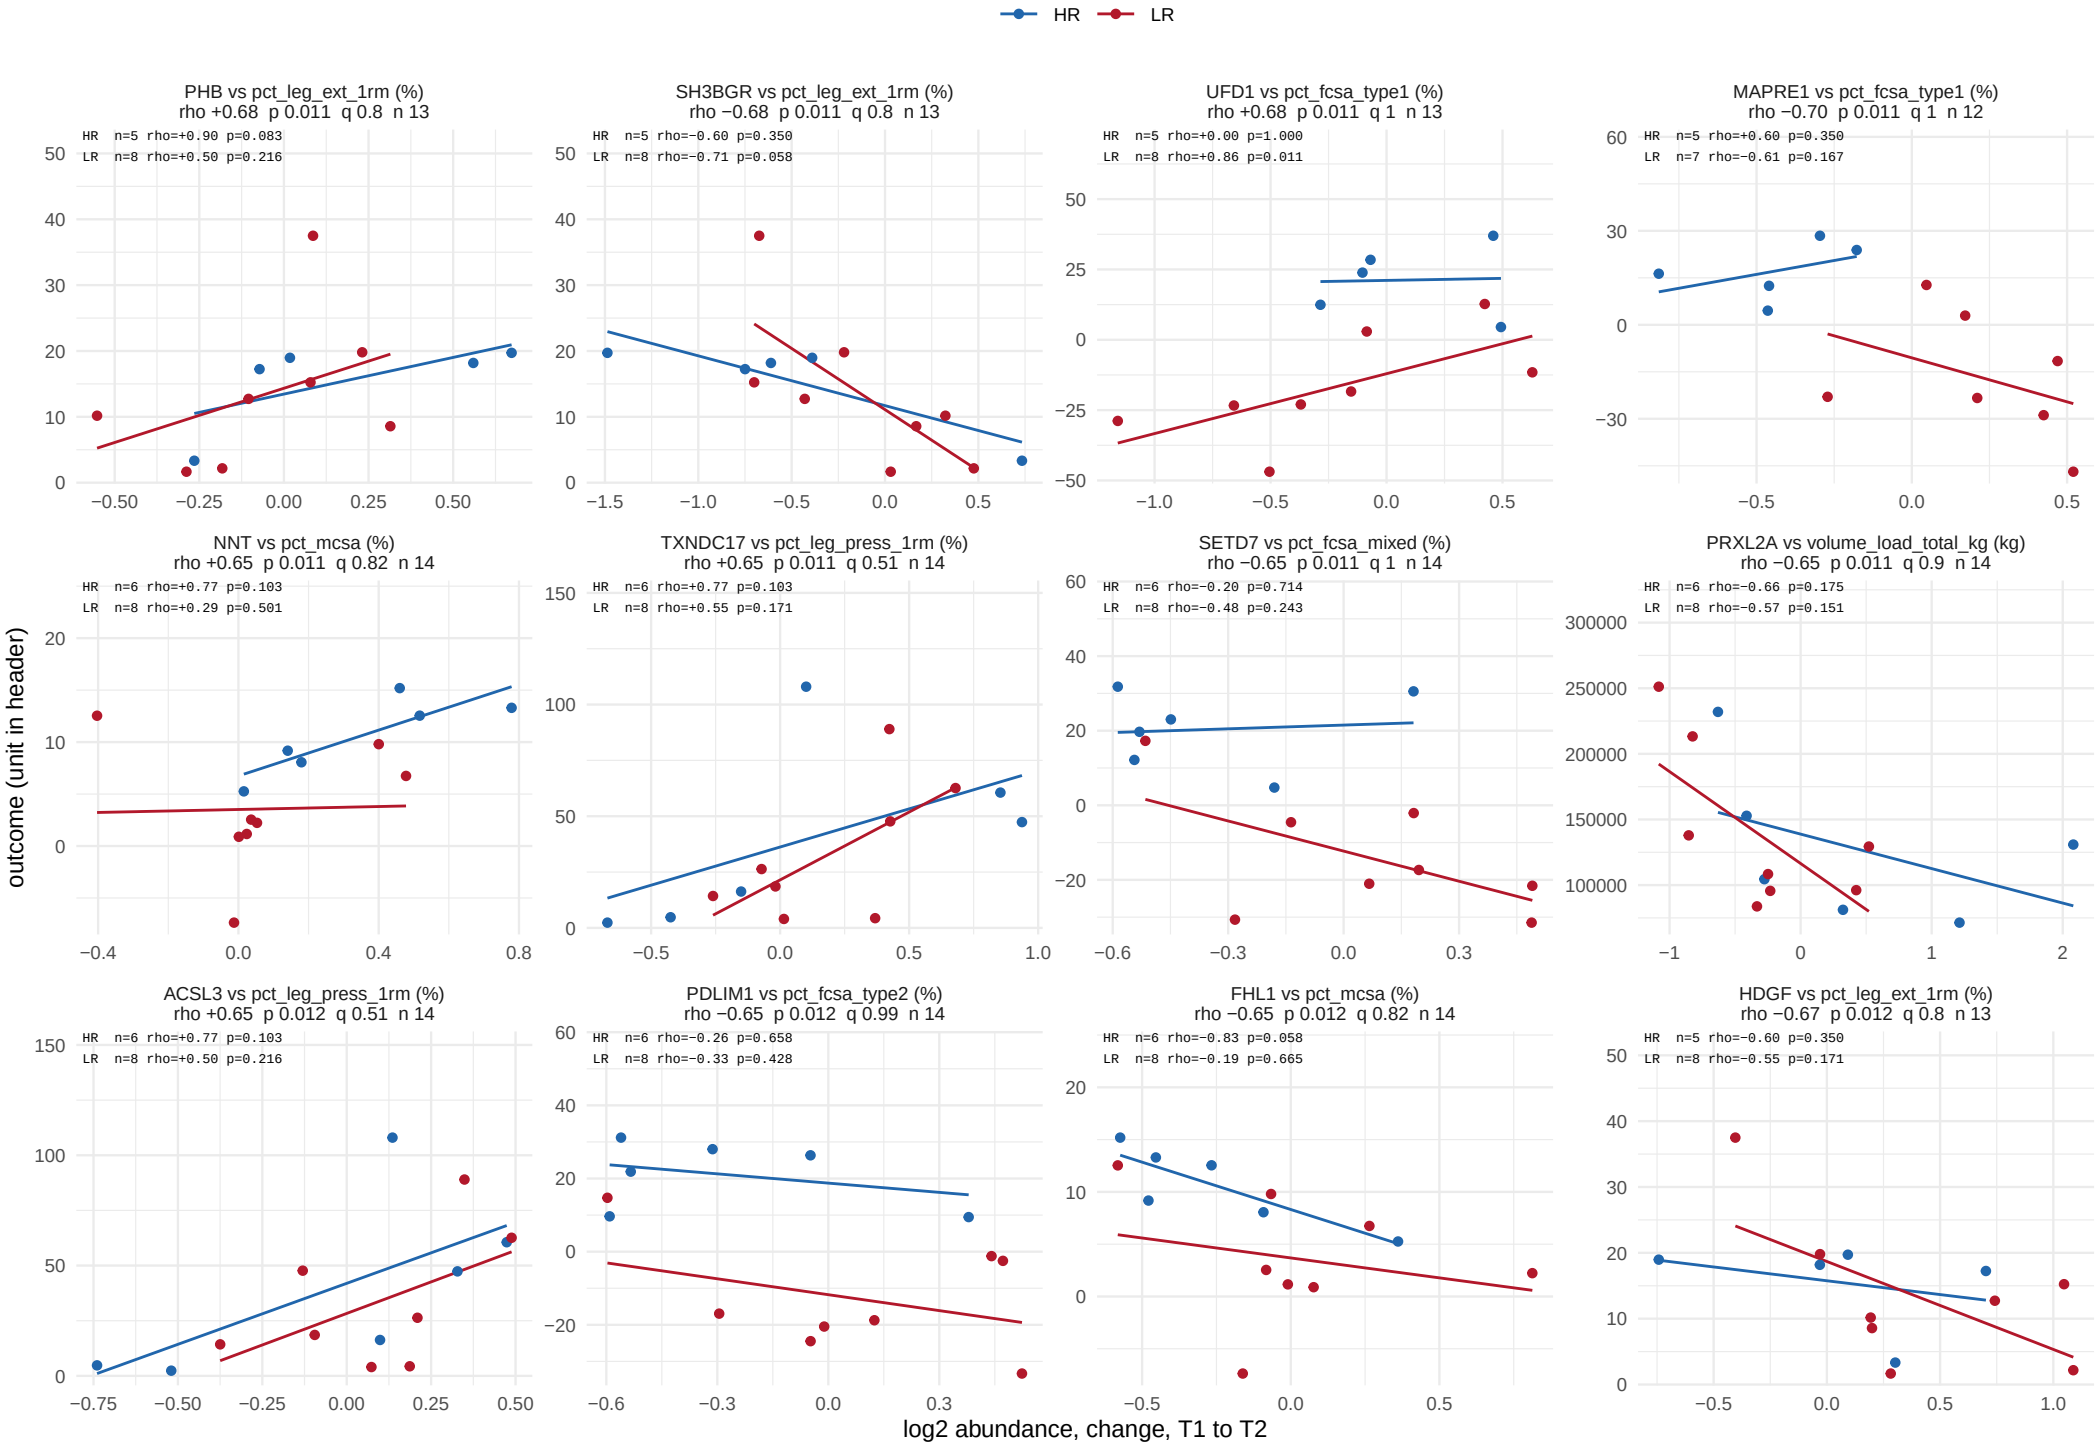

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


502 of 11286 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 11 of 42.

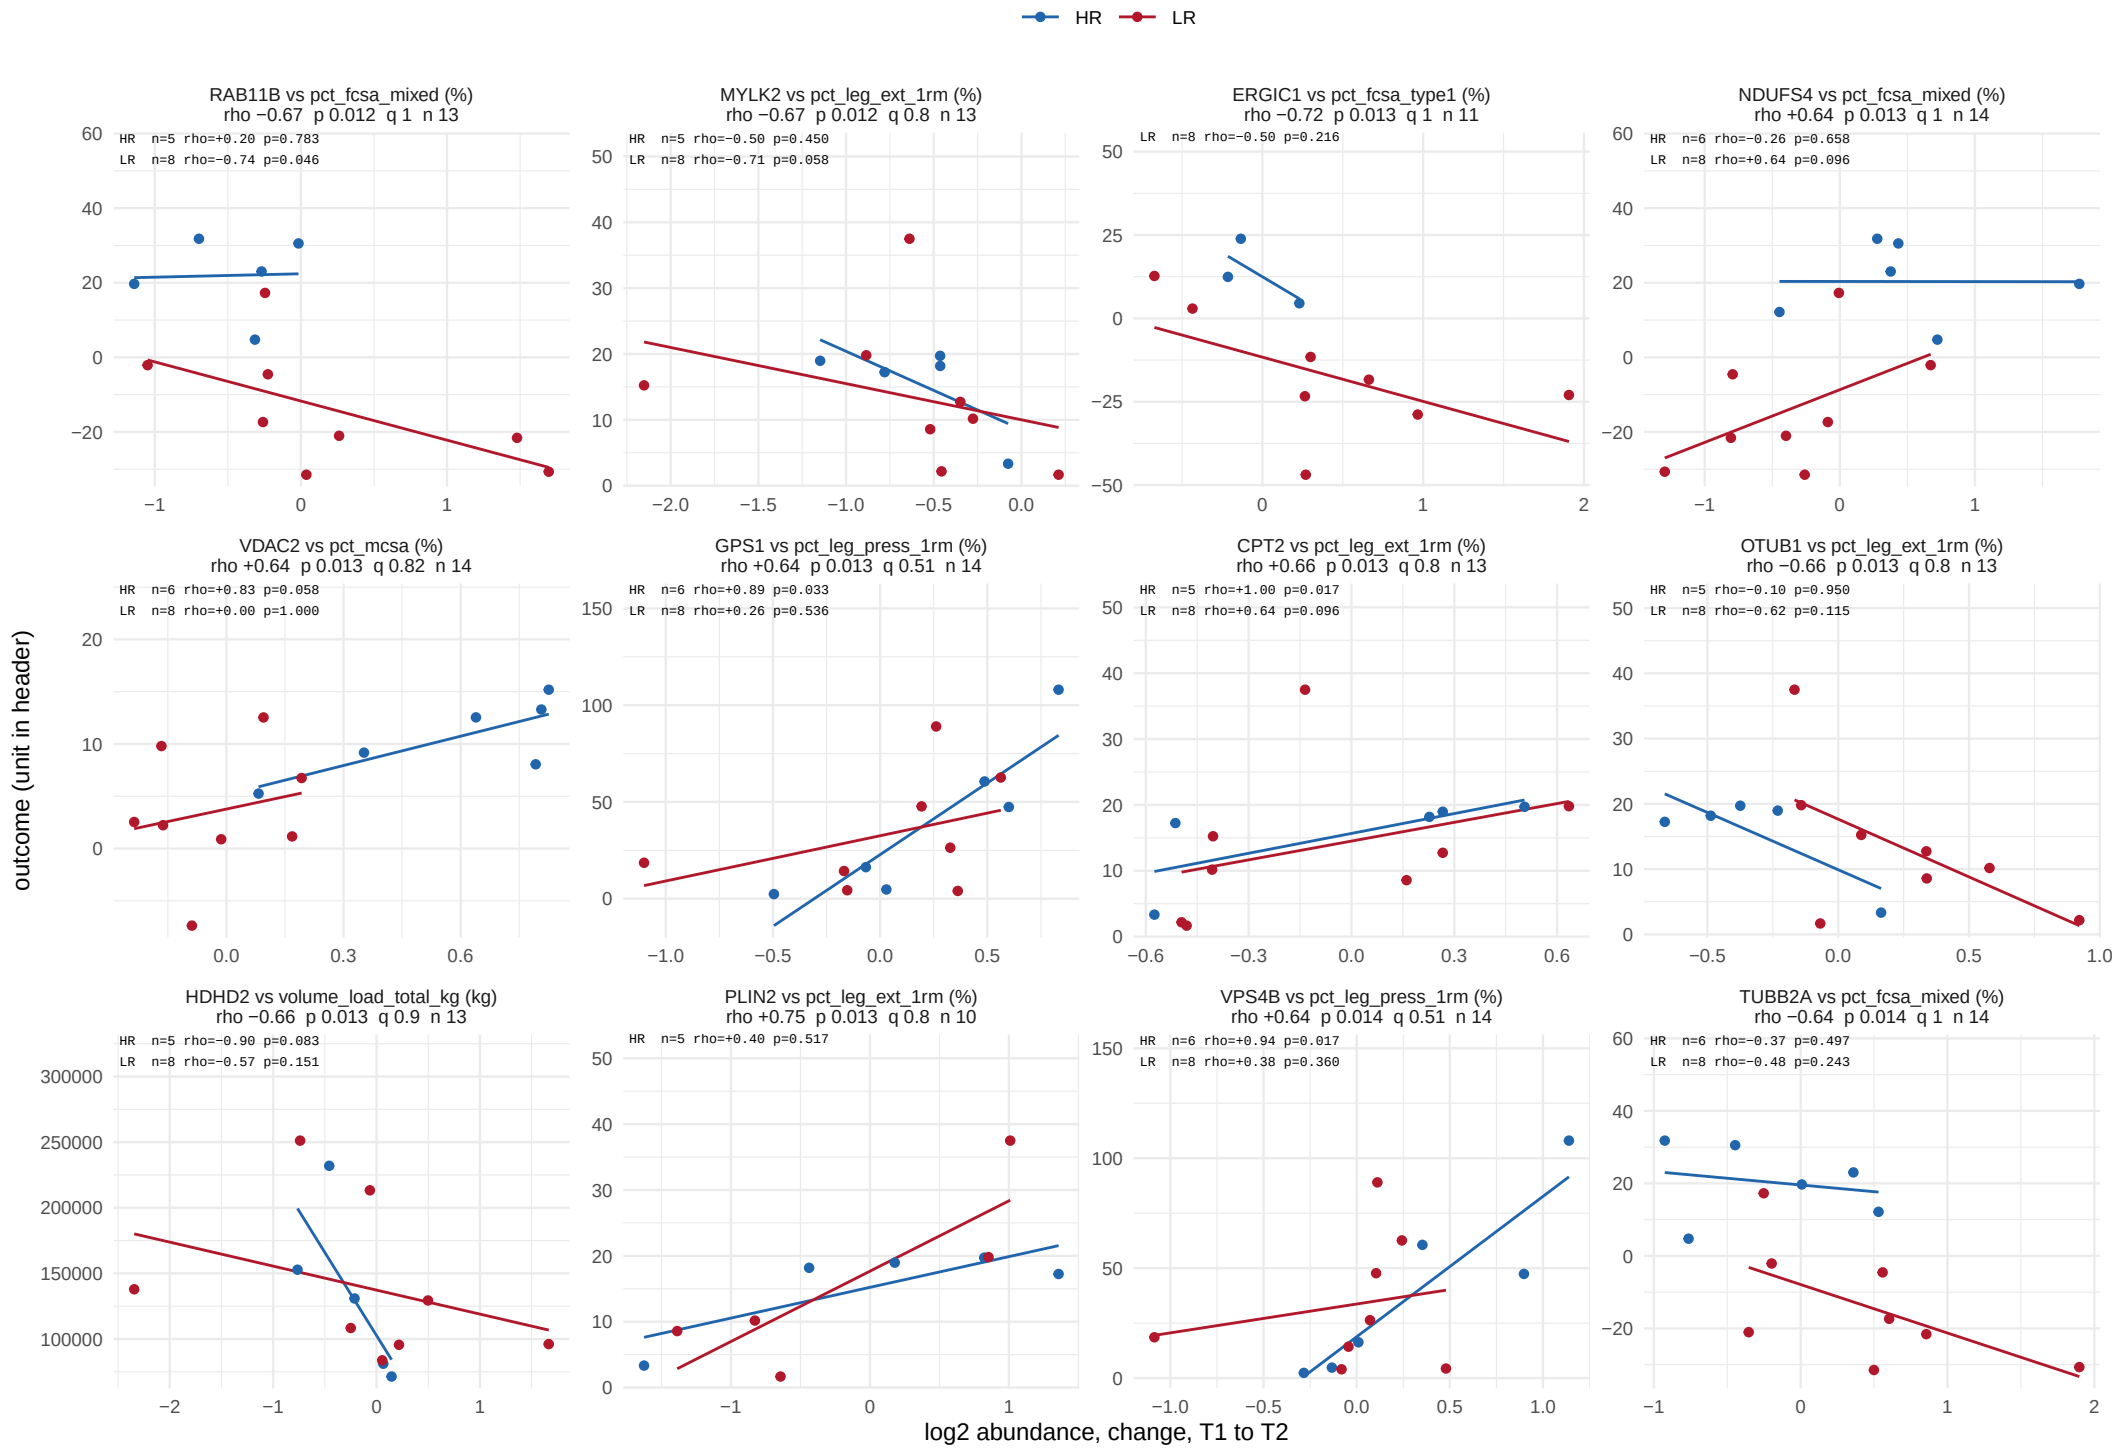

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window

502 of 11286 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 12 of 42.

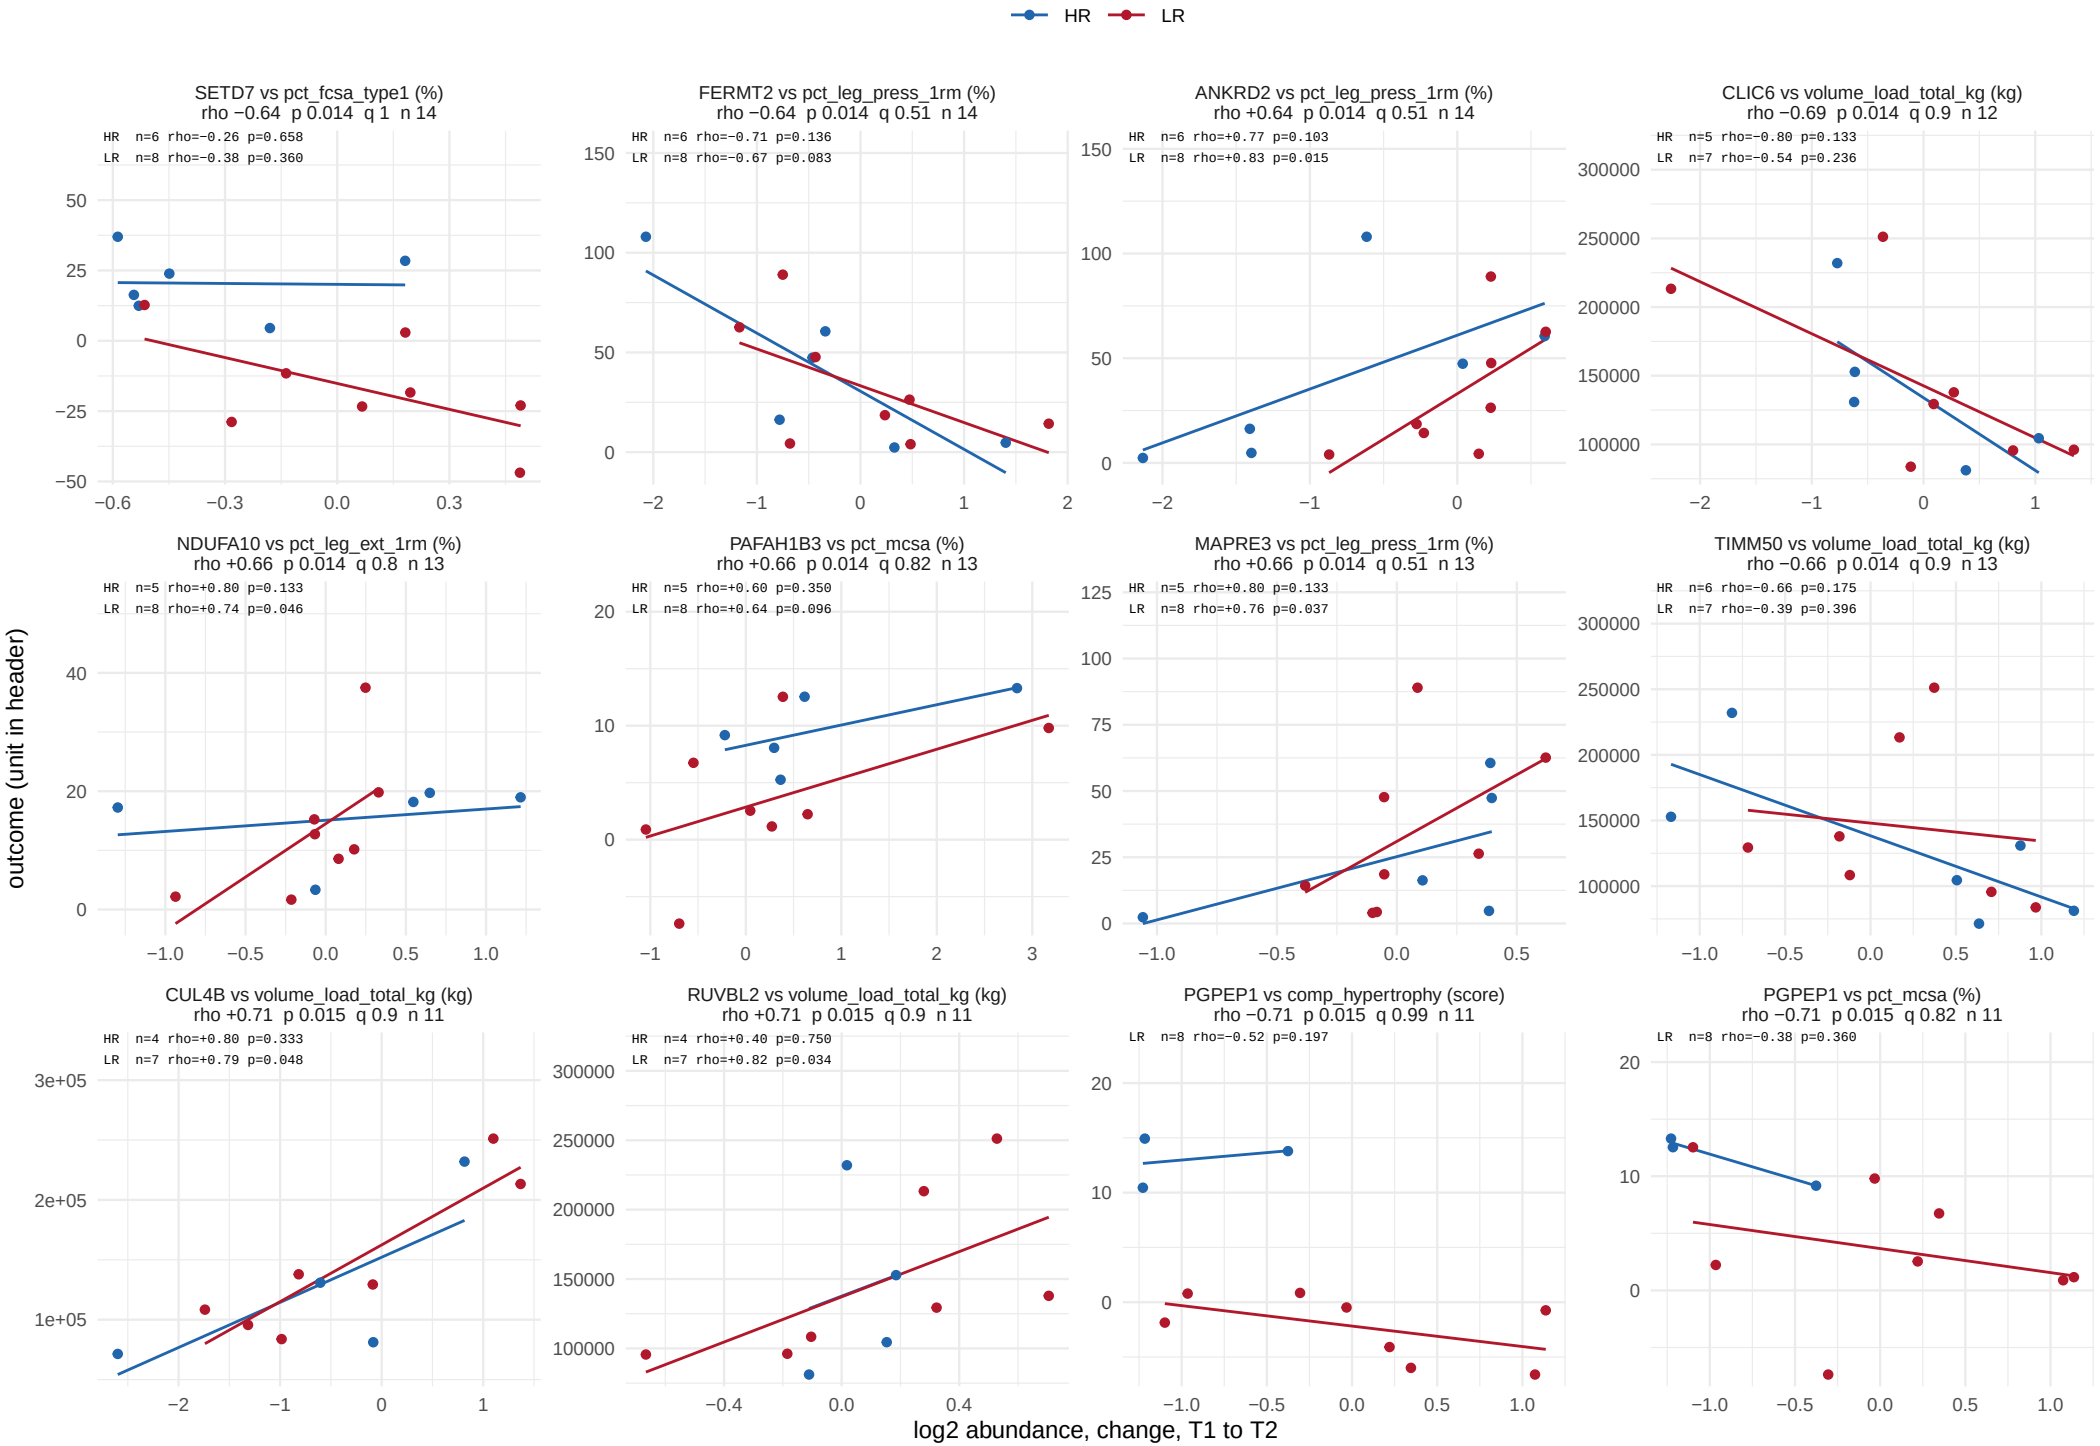

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


502 of 11286 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 13 of 42.



One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window

502 of 11286 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 14 of 42.

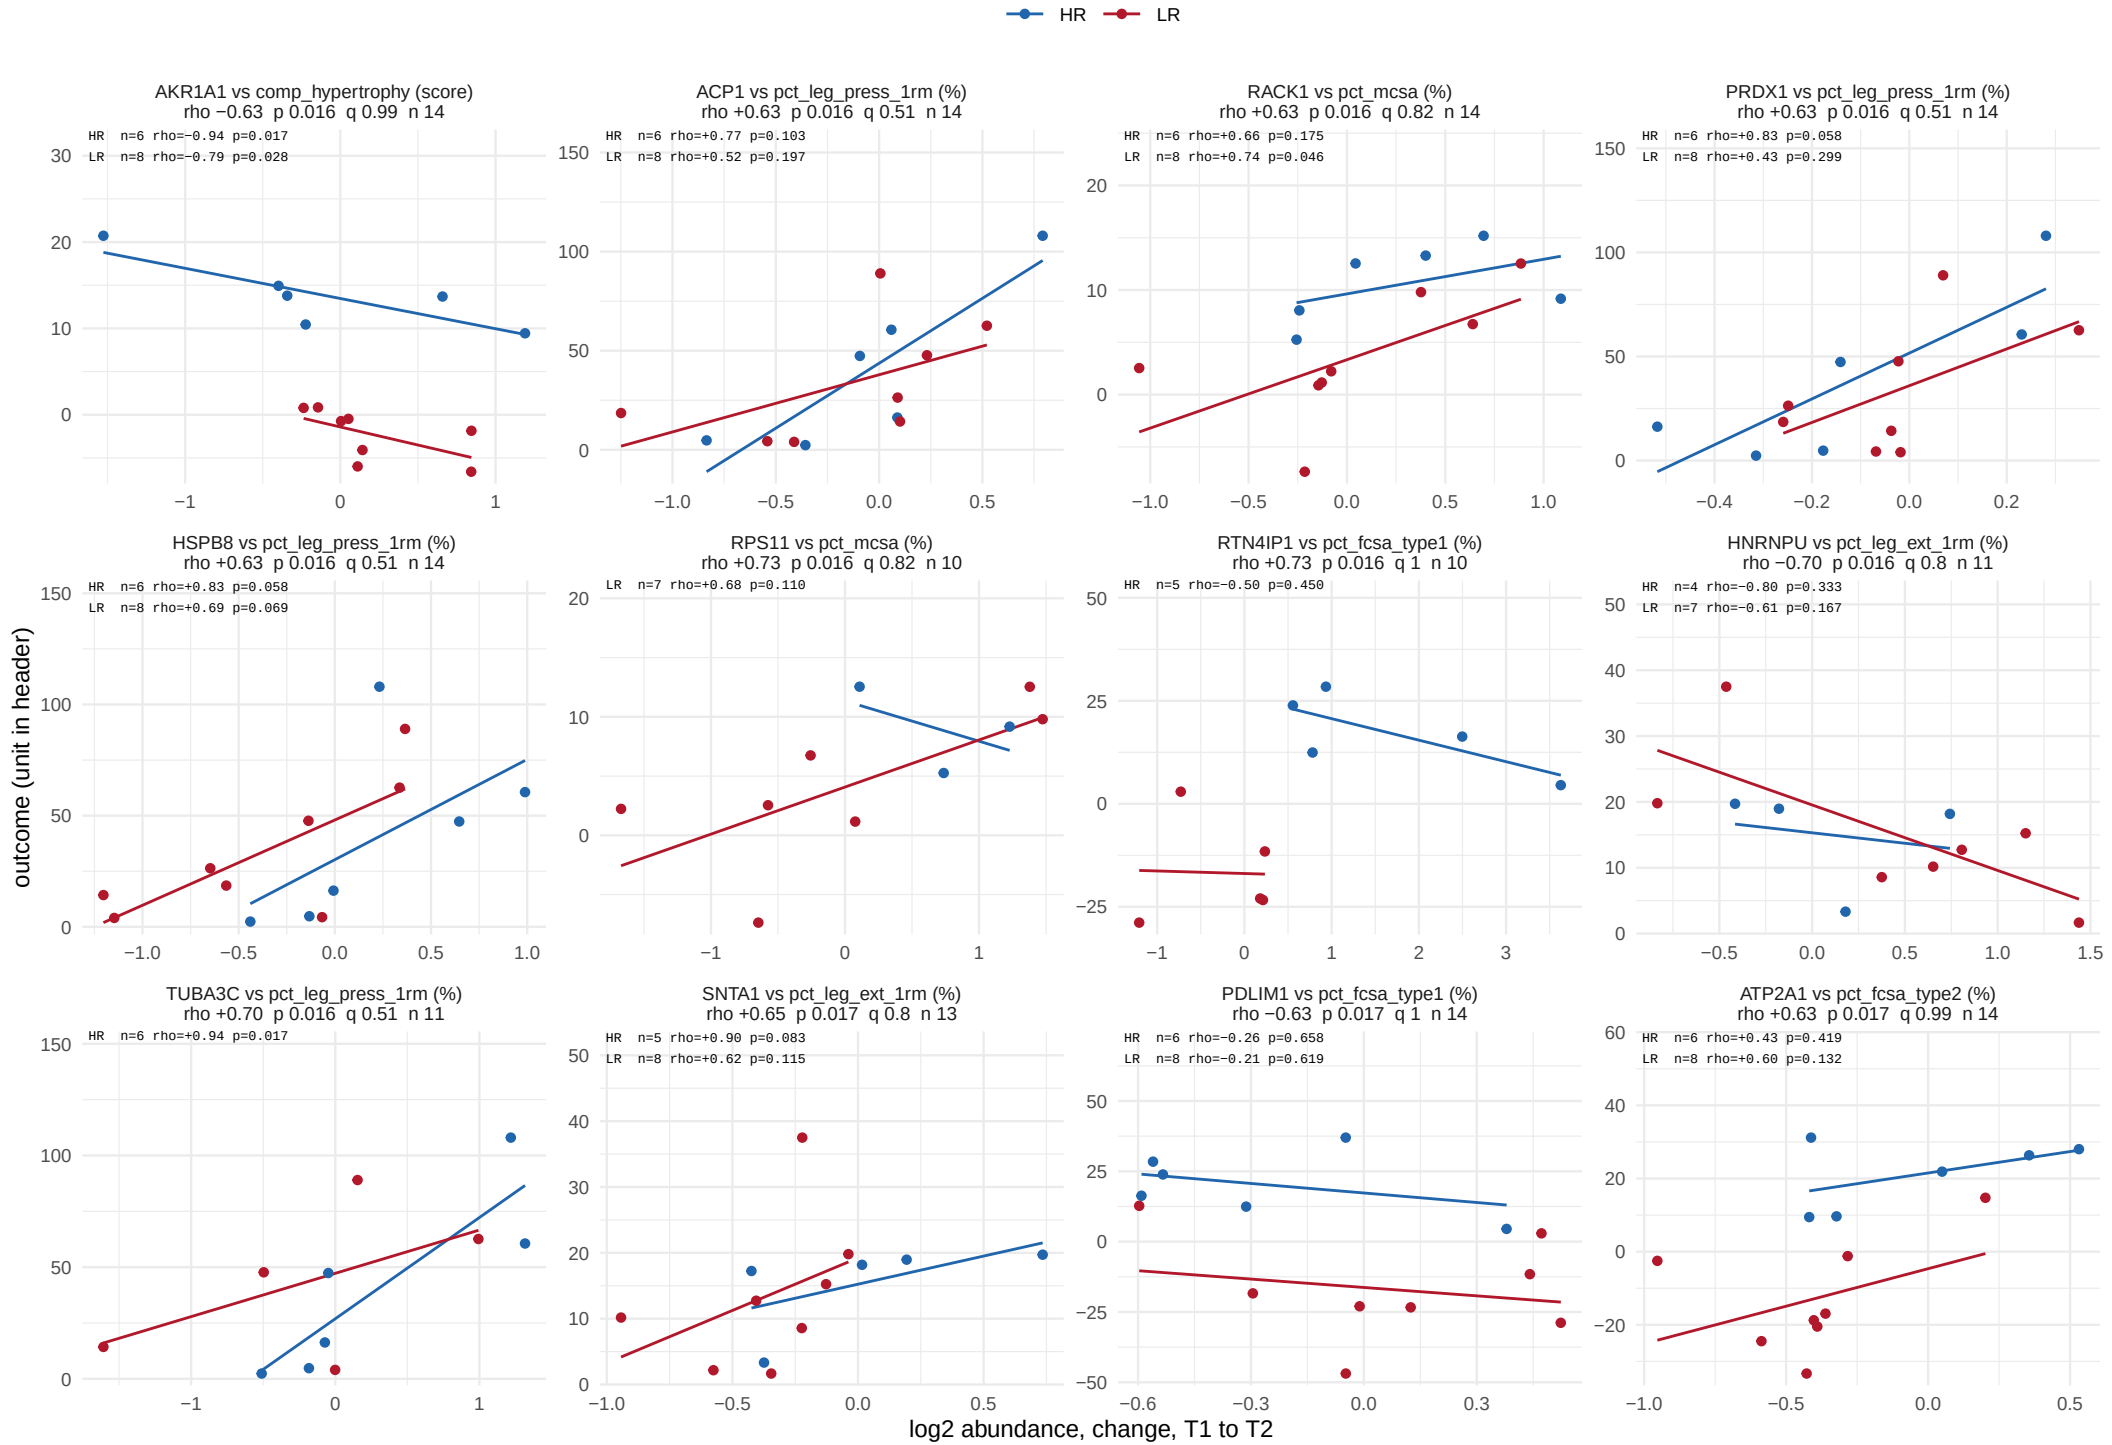

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


502 of 11286 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 15 of 42.



One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


502 of 11286 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 16 of 42.

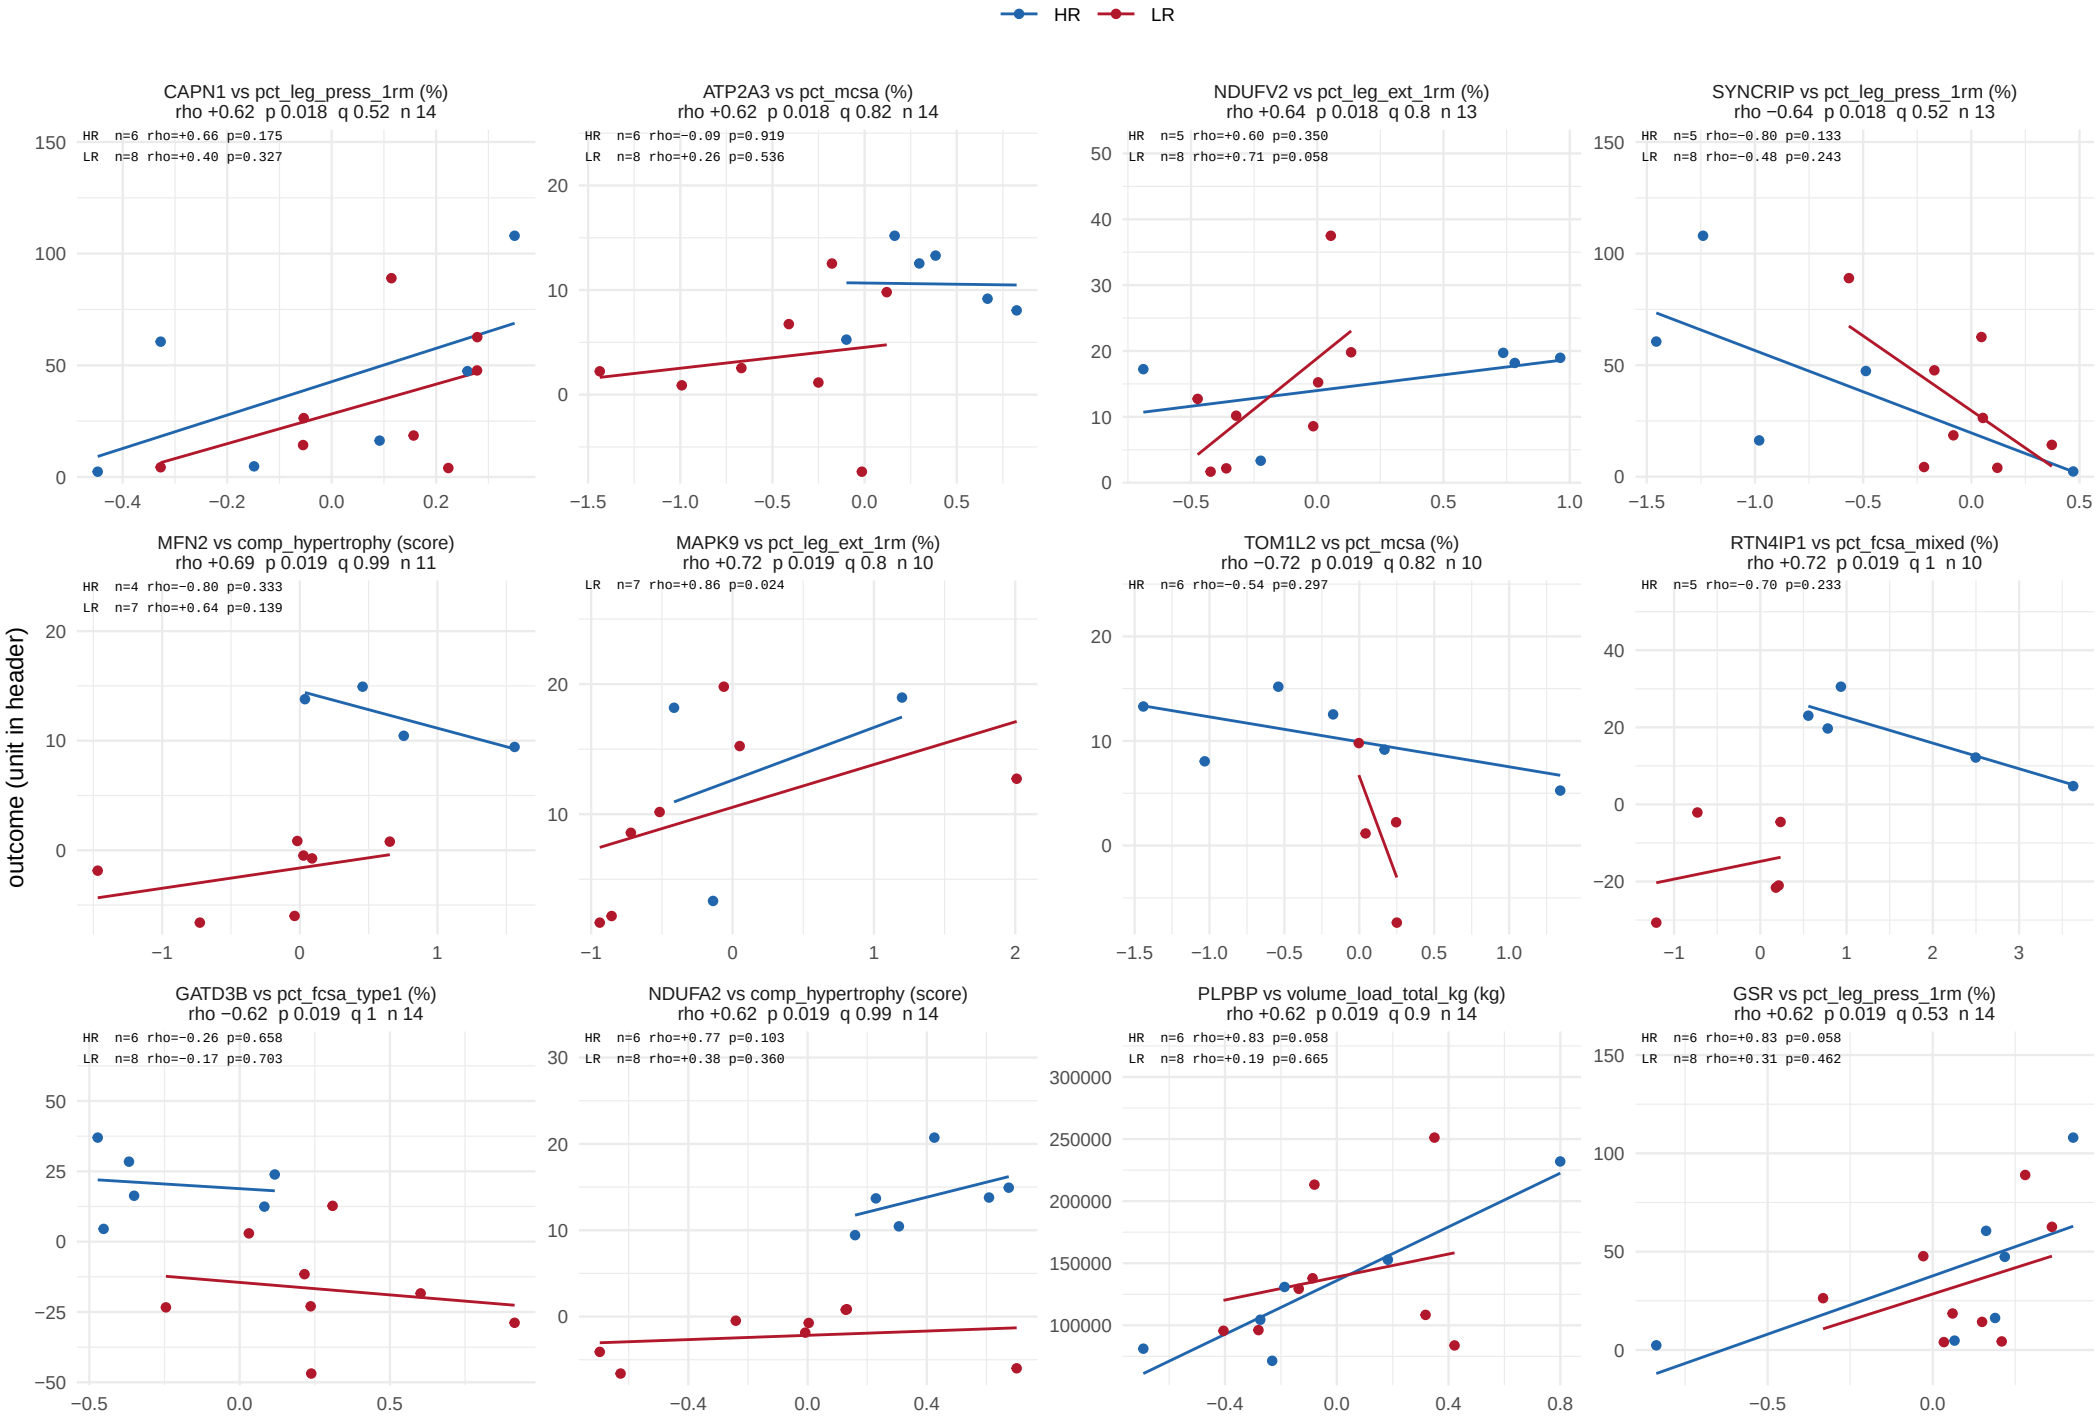

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


502 of 11286 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 17 of 42.

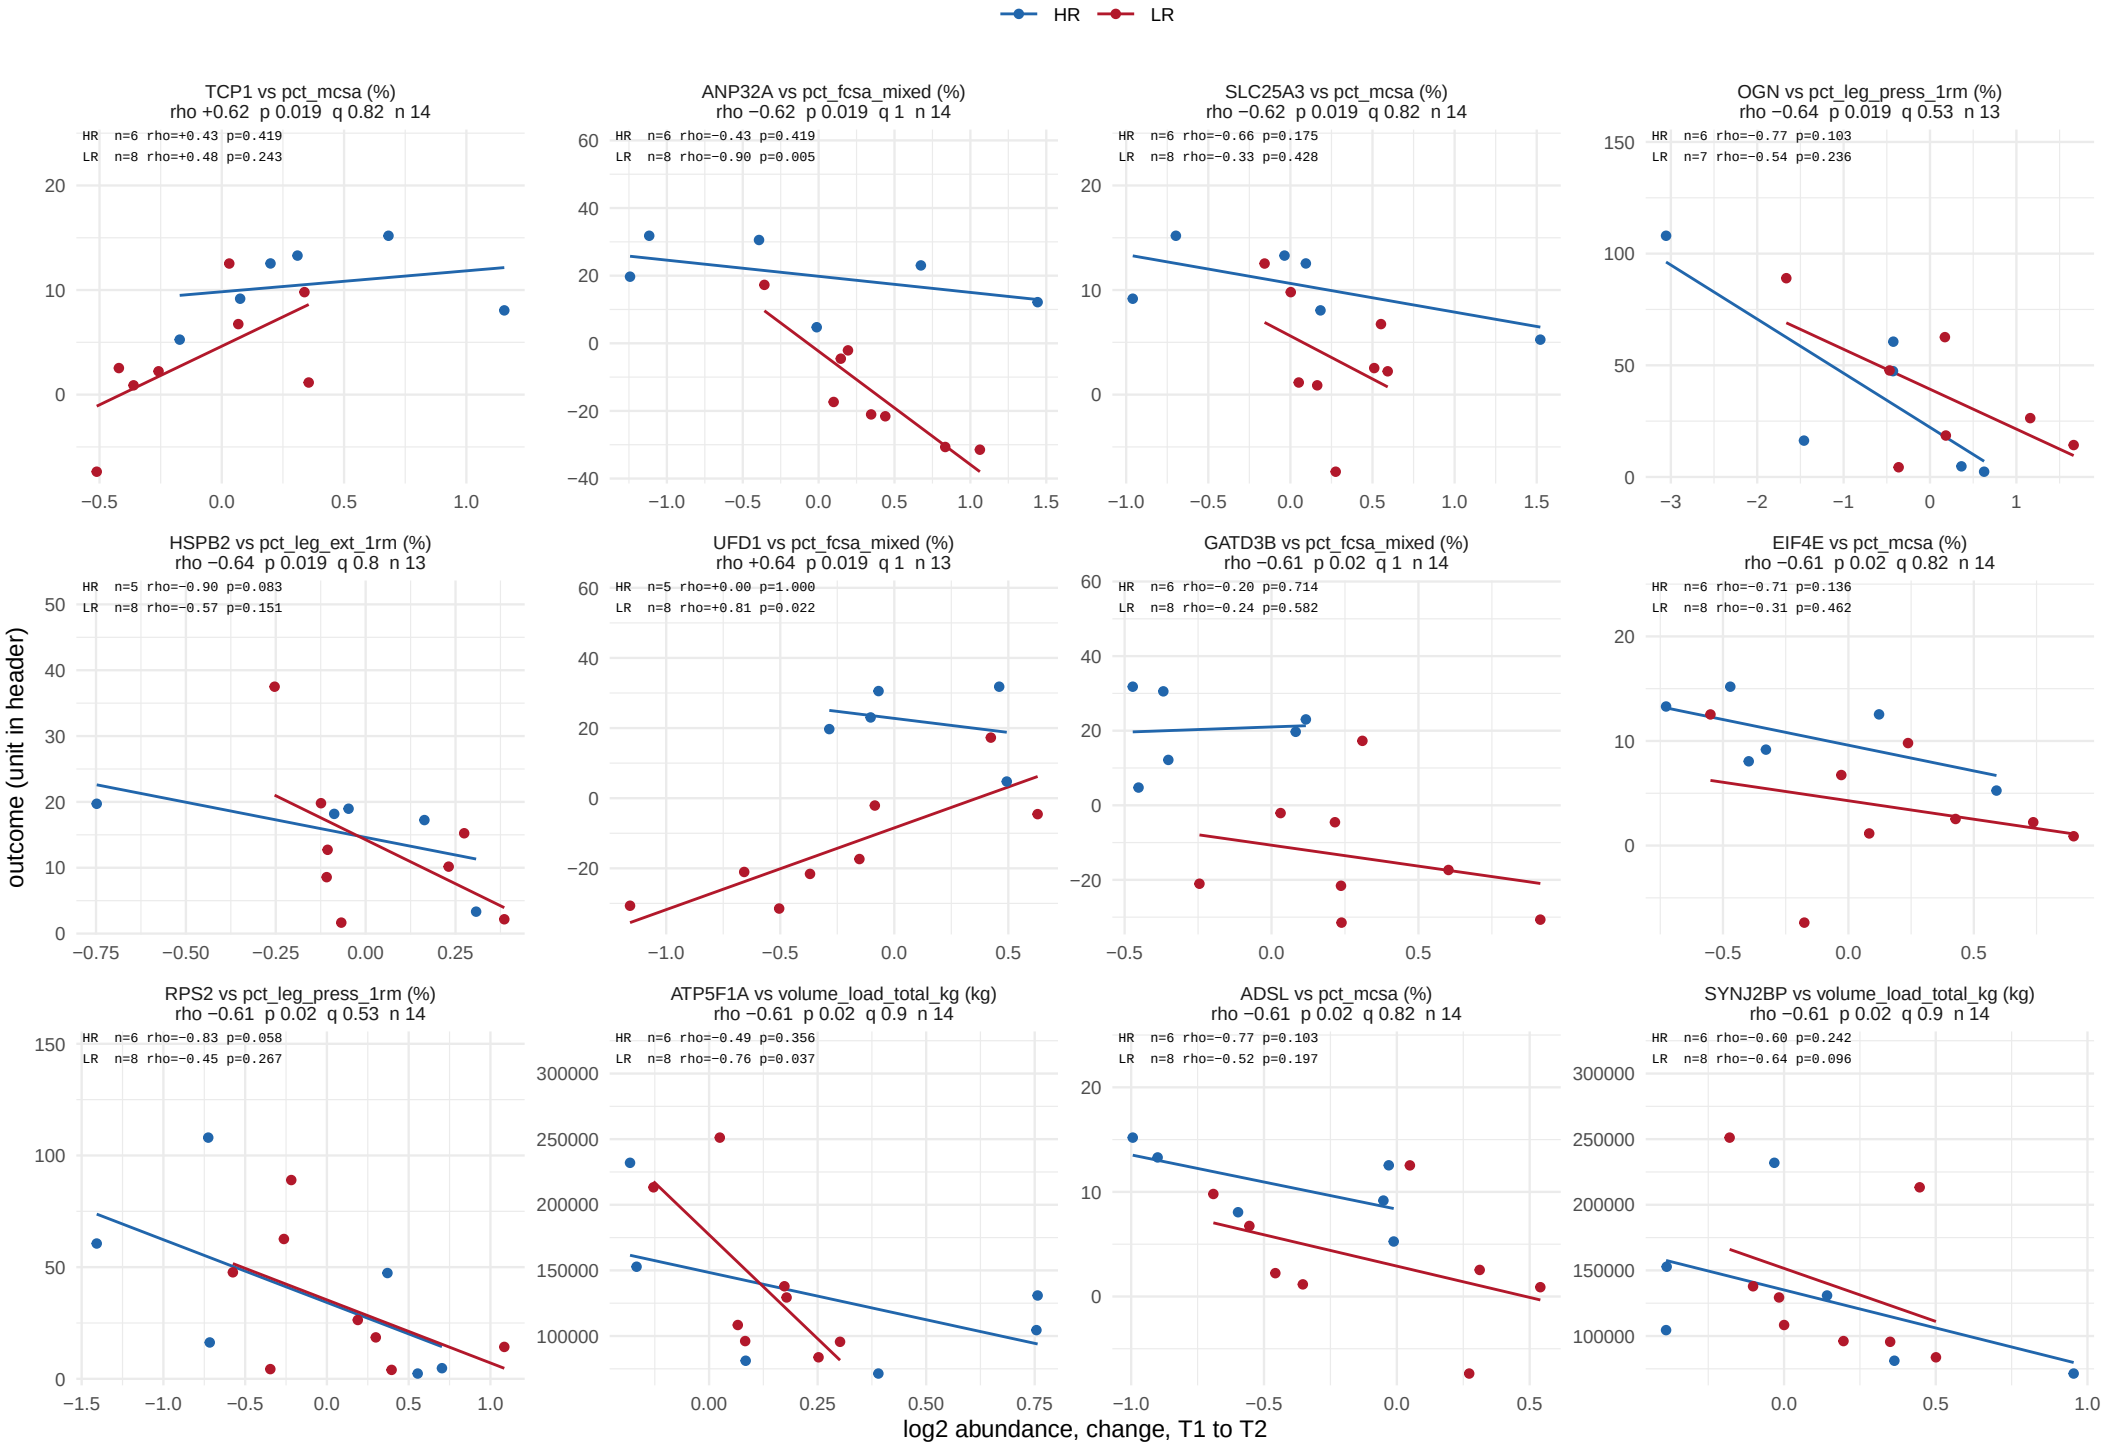

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


502 of 11286 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 18 of 42.

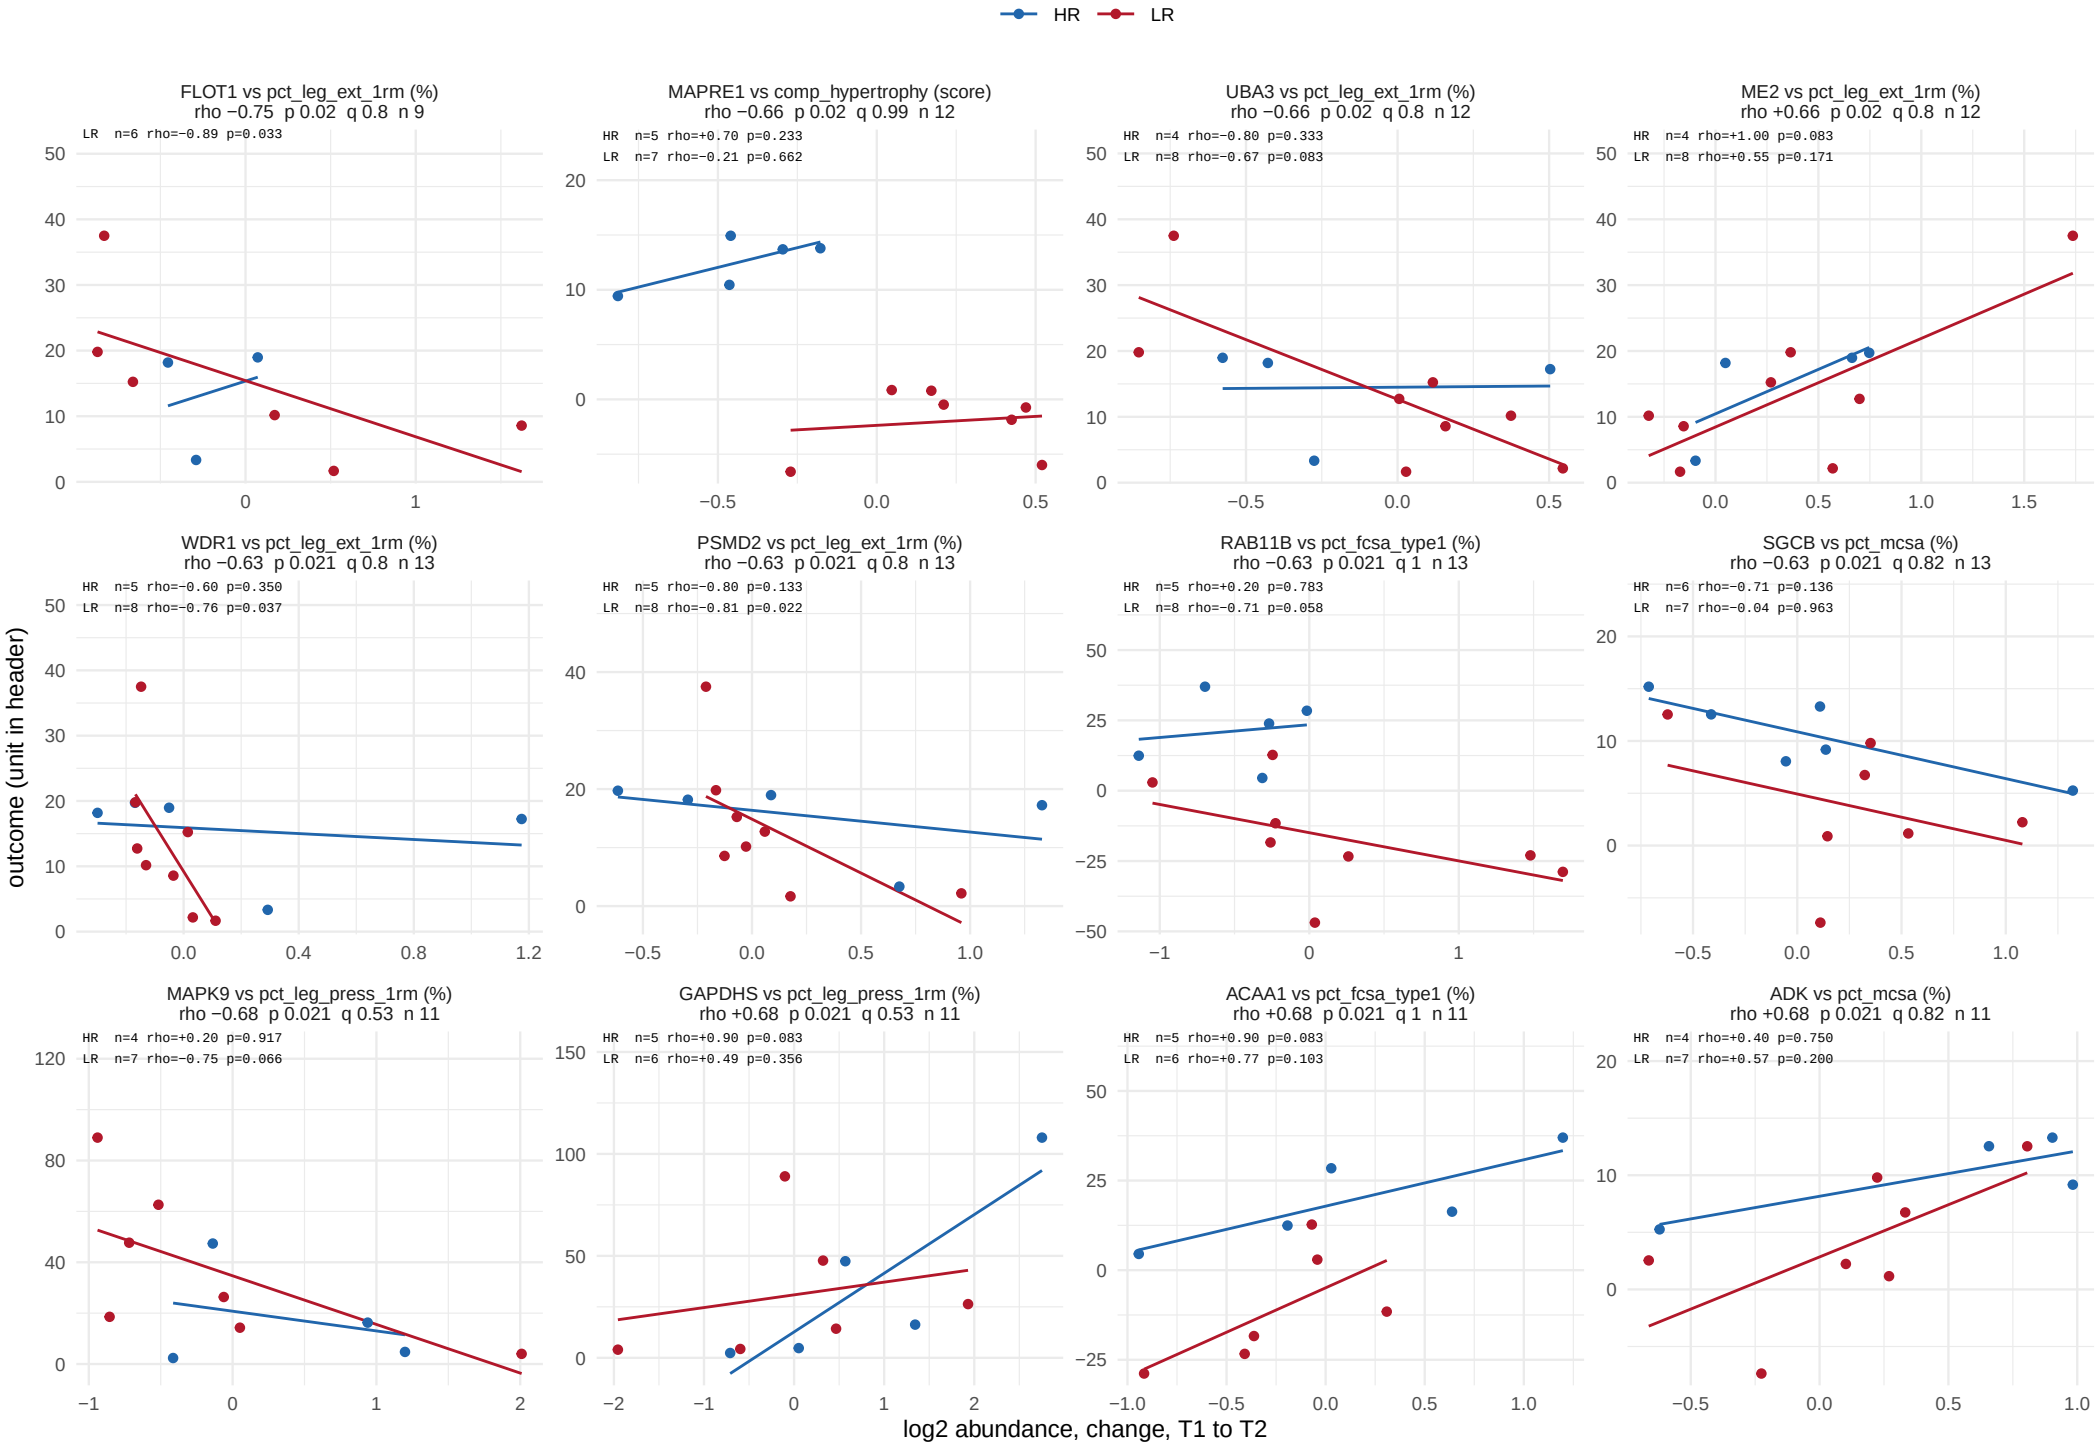

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


502 of 11286 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 19 of 42.

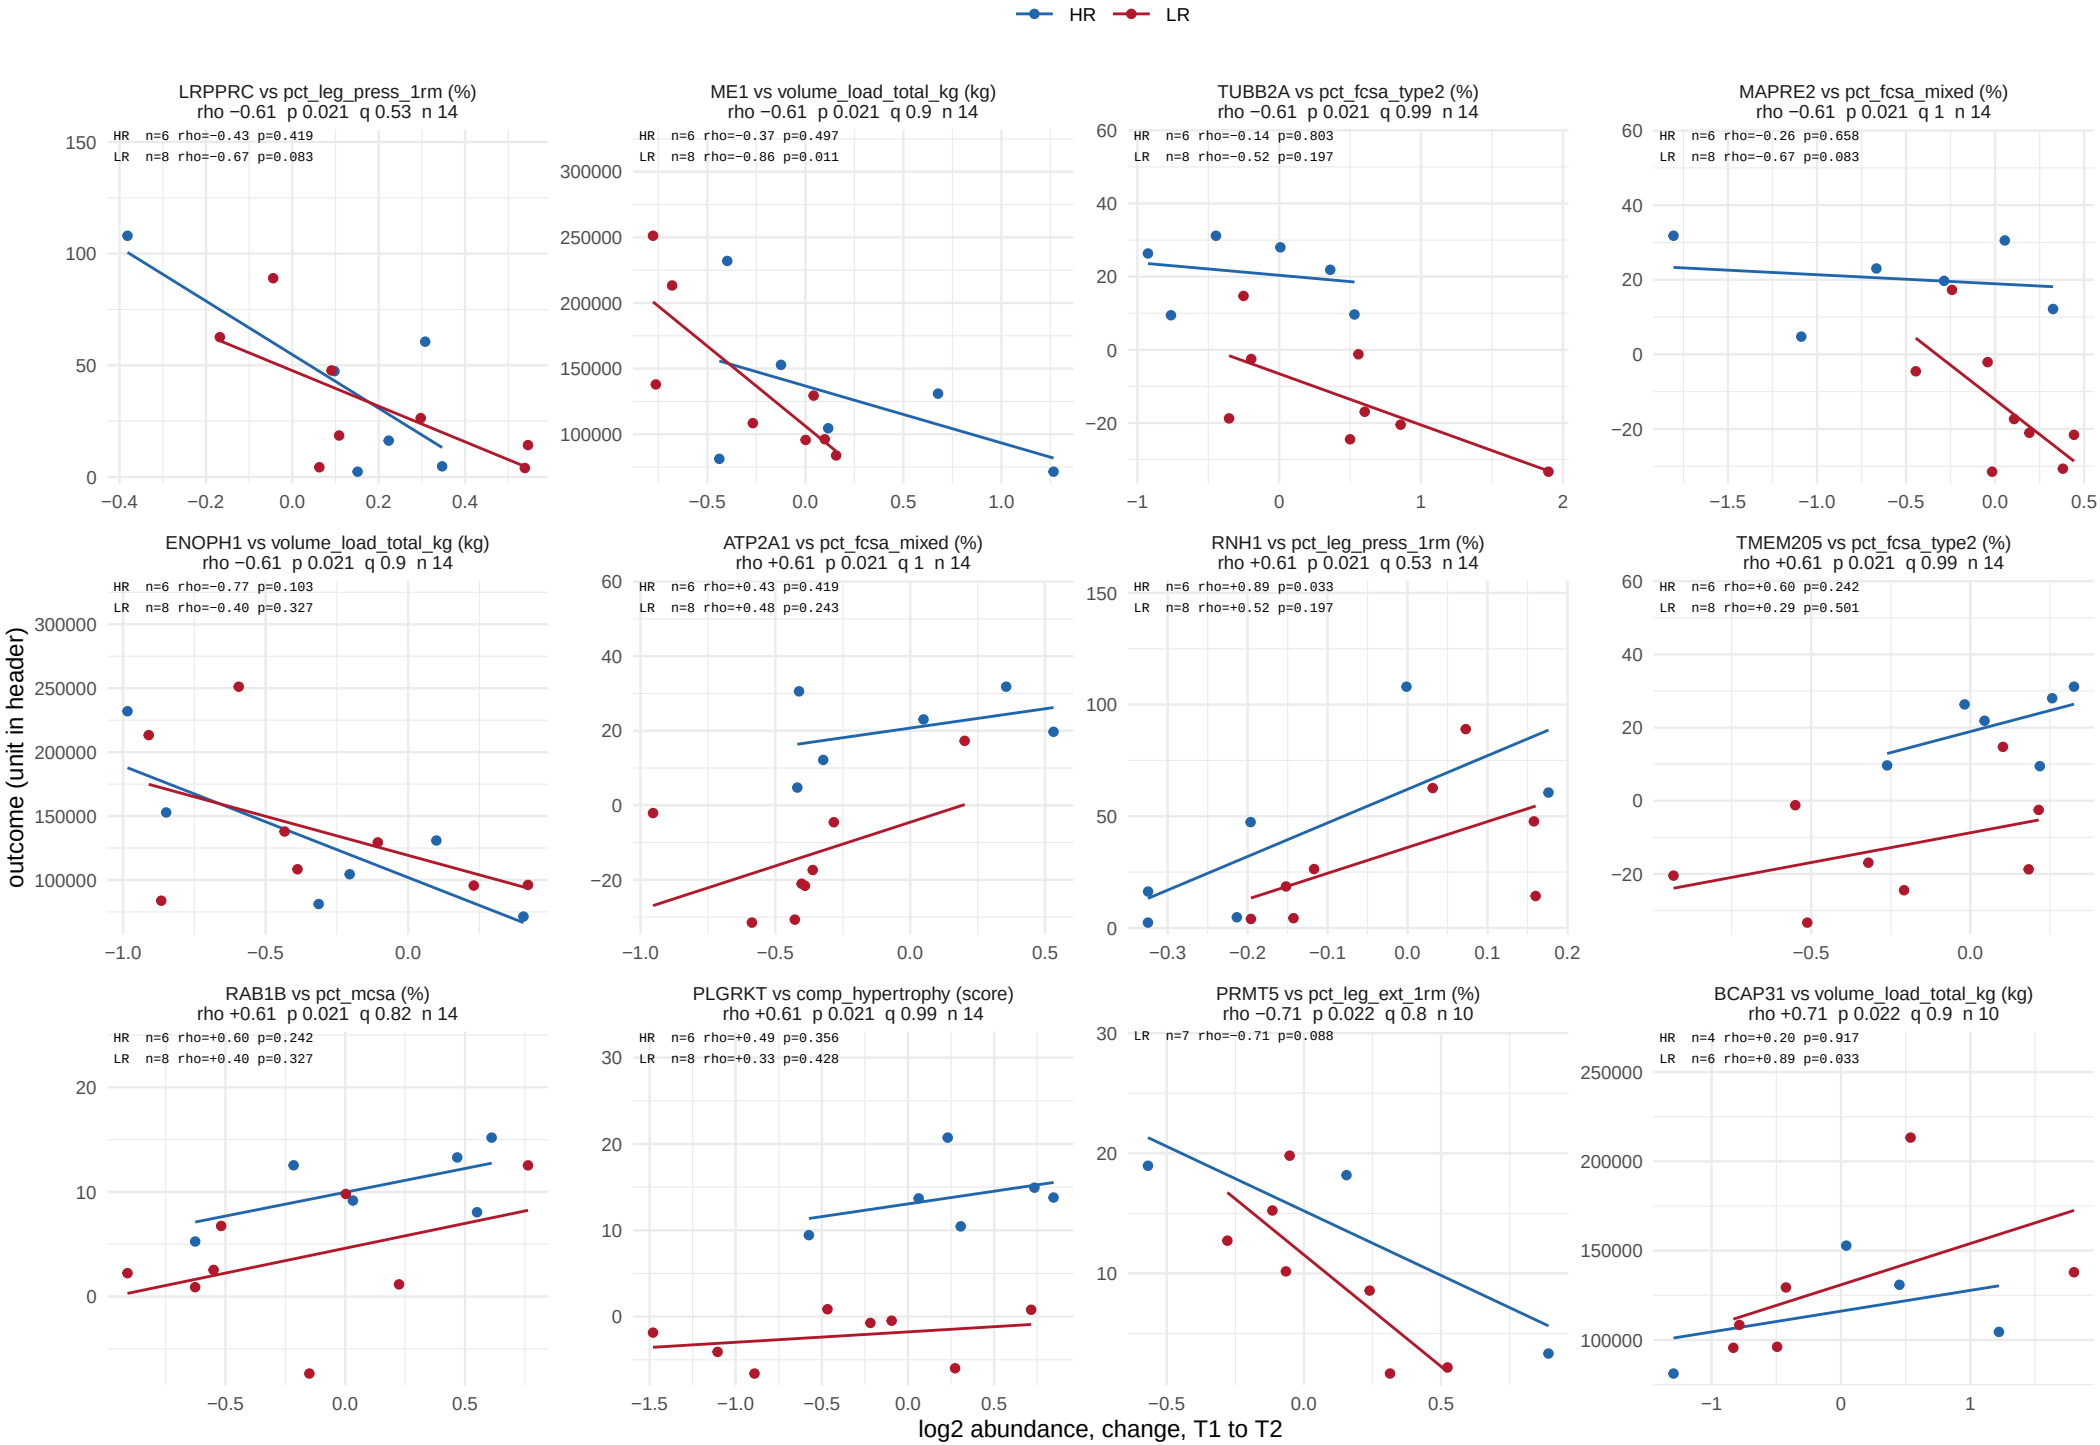

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


502 of 11286 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 20 of 42.

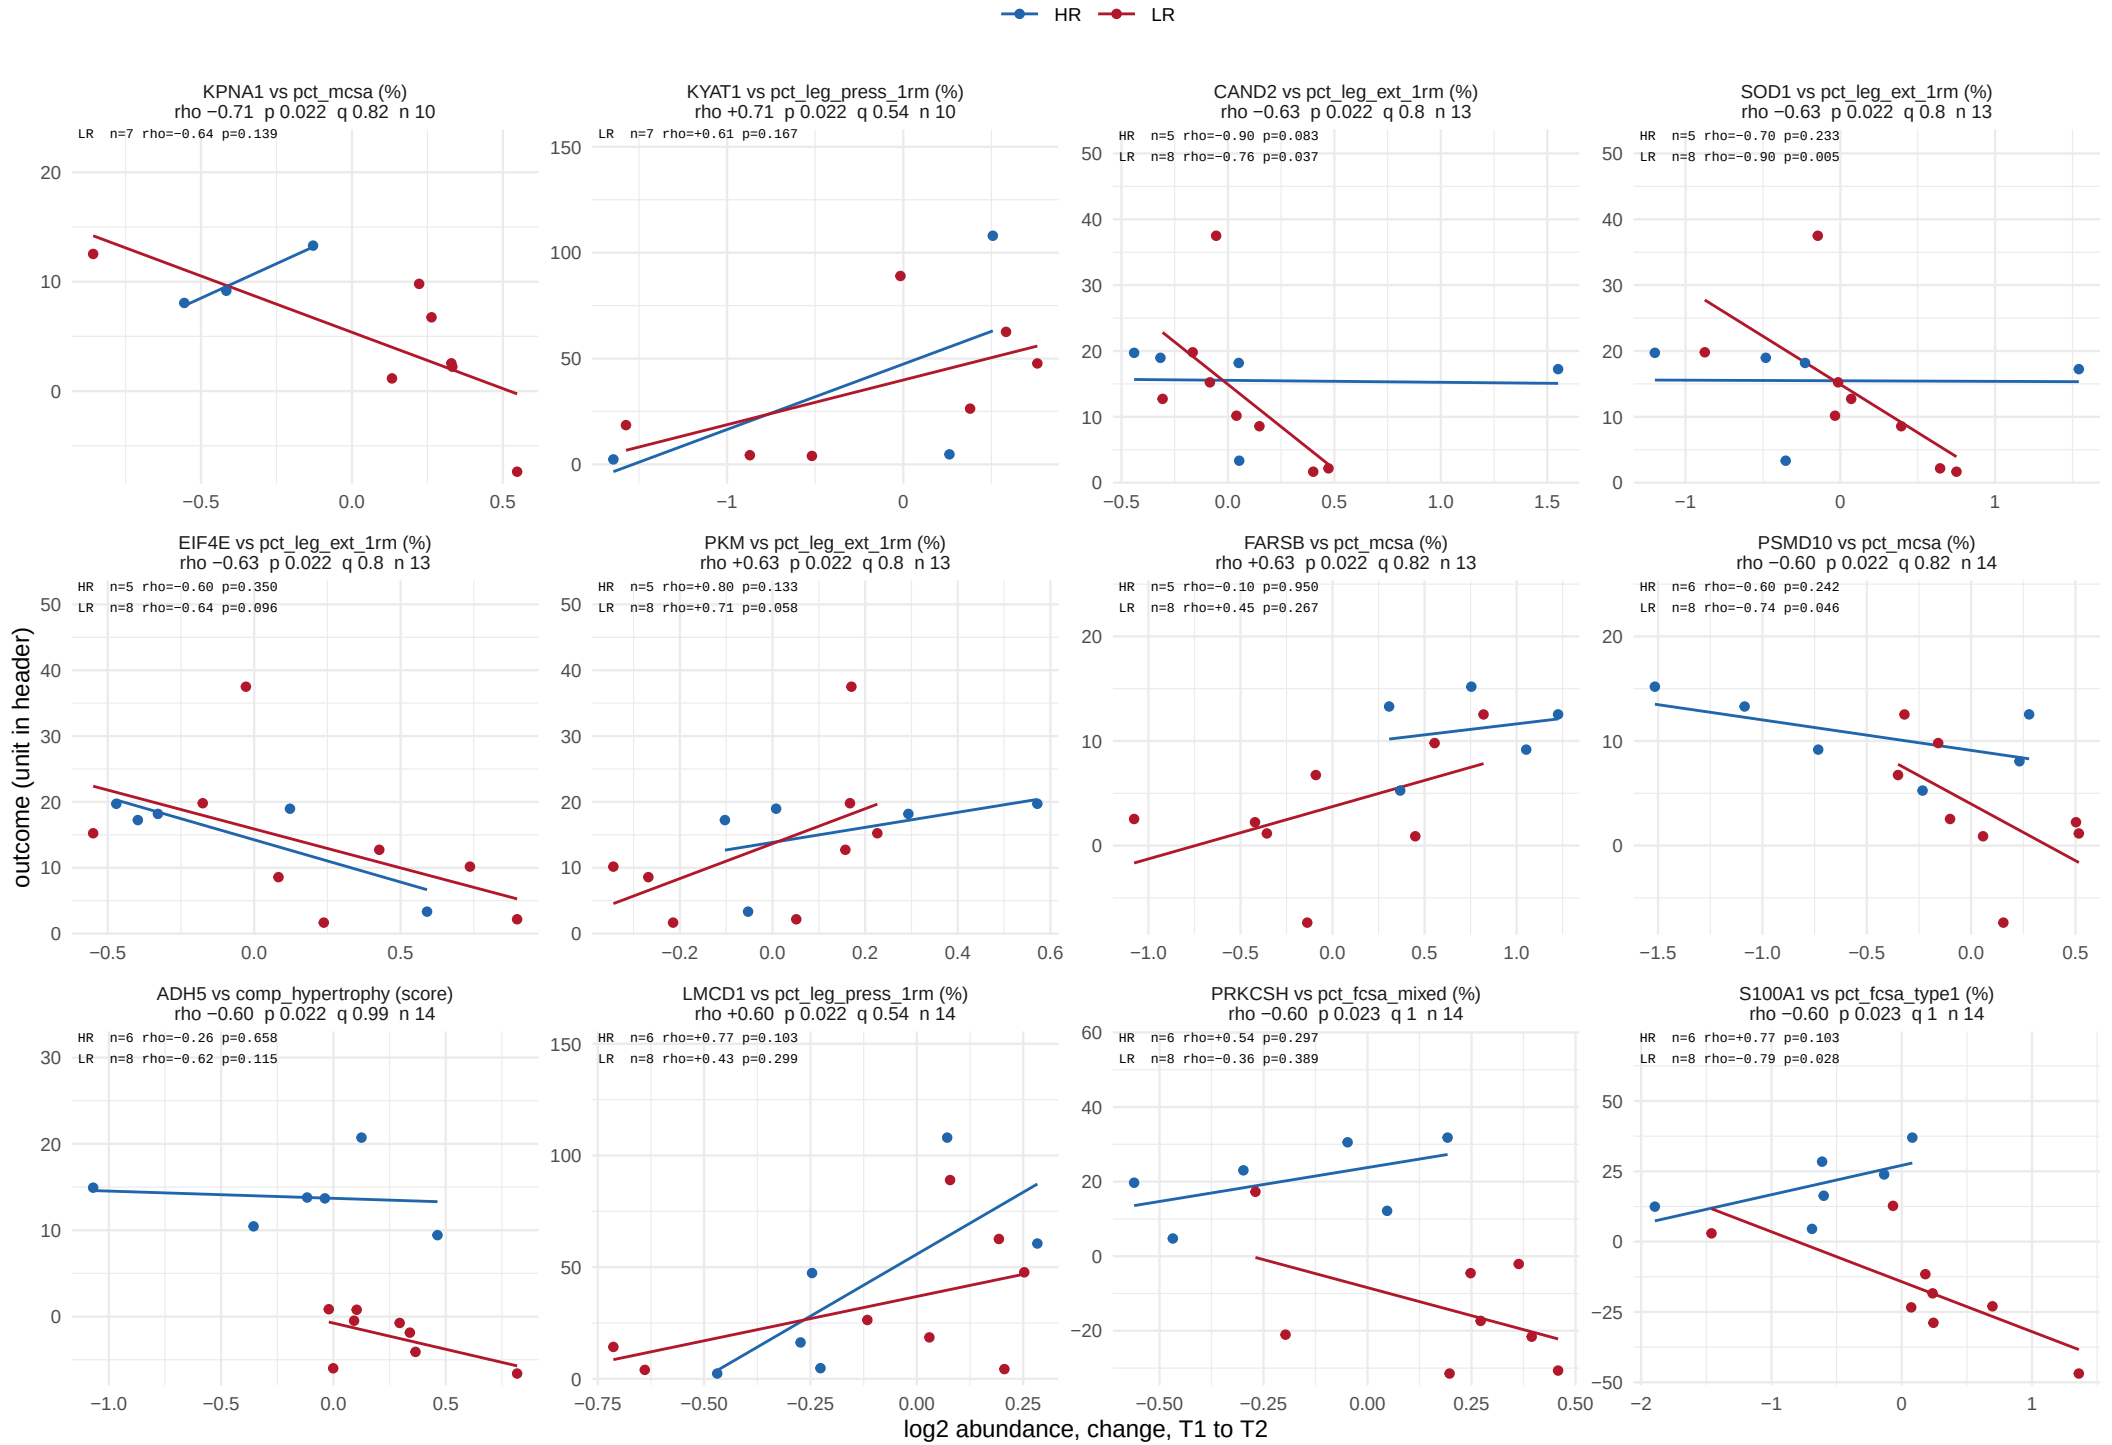

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


502 of 11286 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 21 of 42.

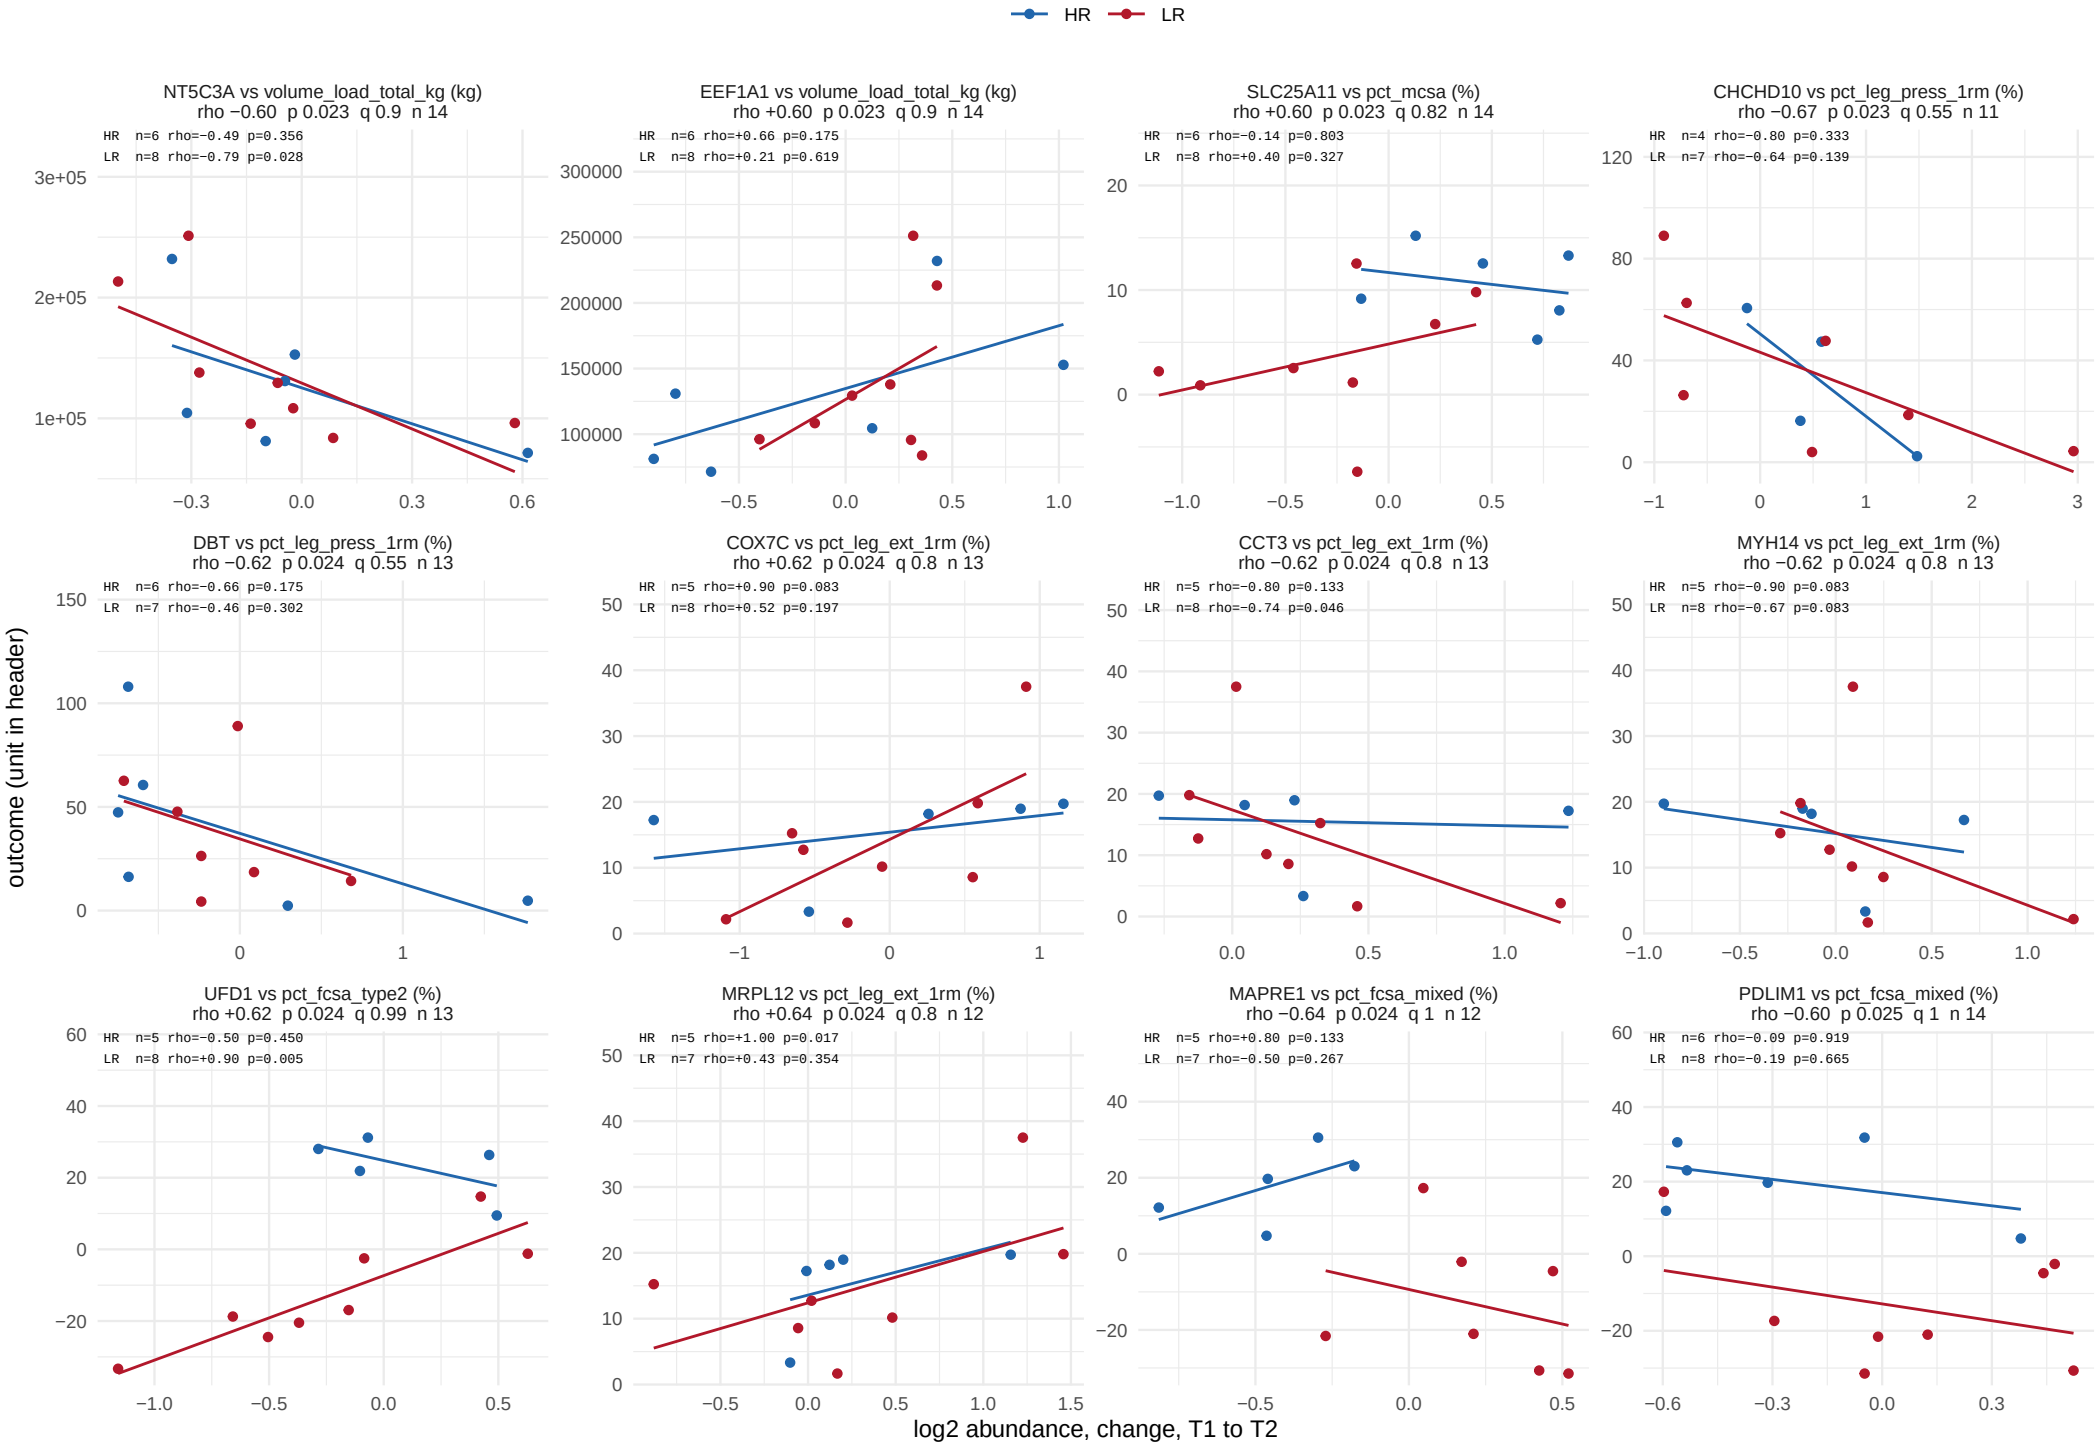

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


502 of 11286 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 22 of 42.

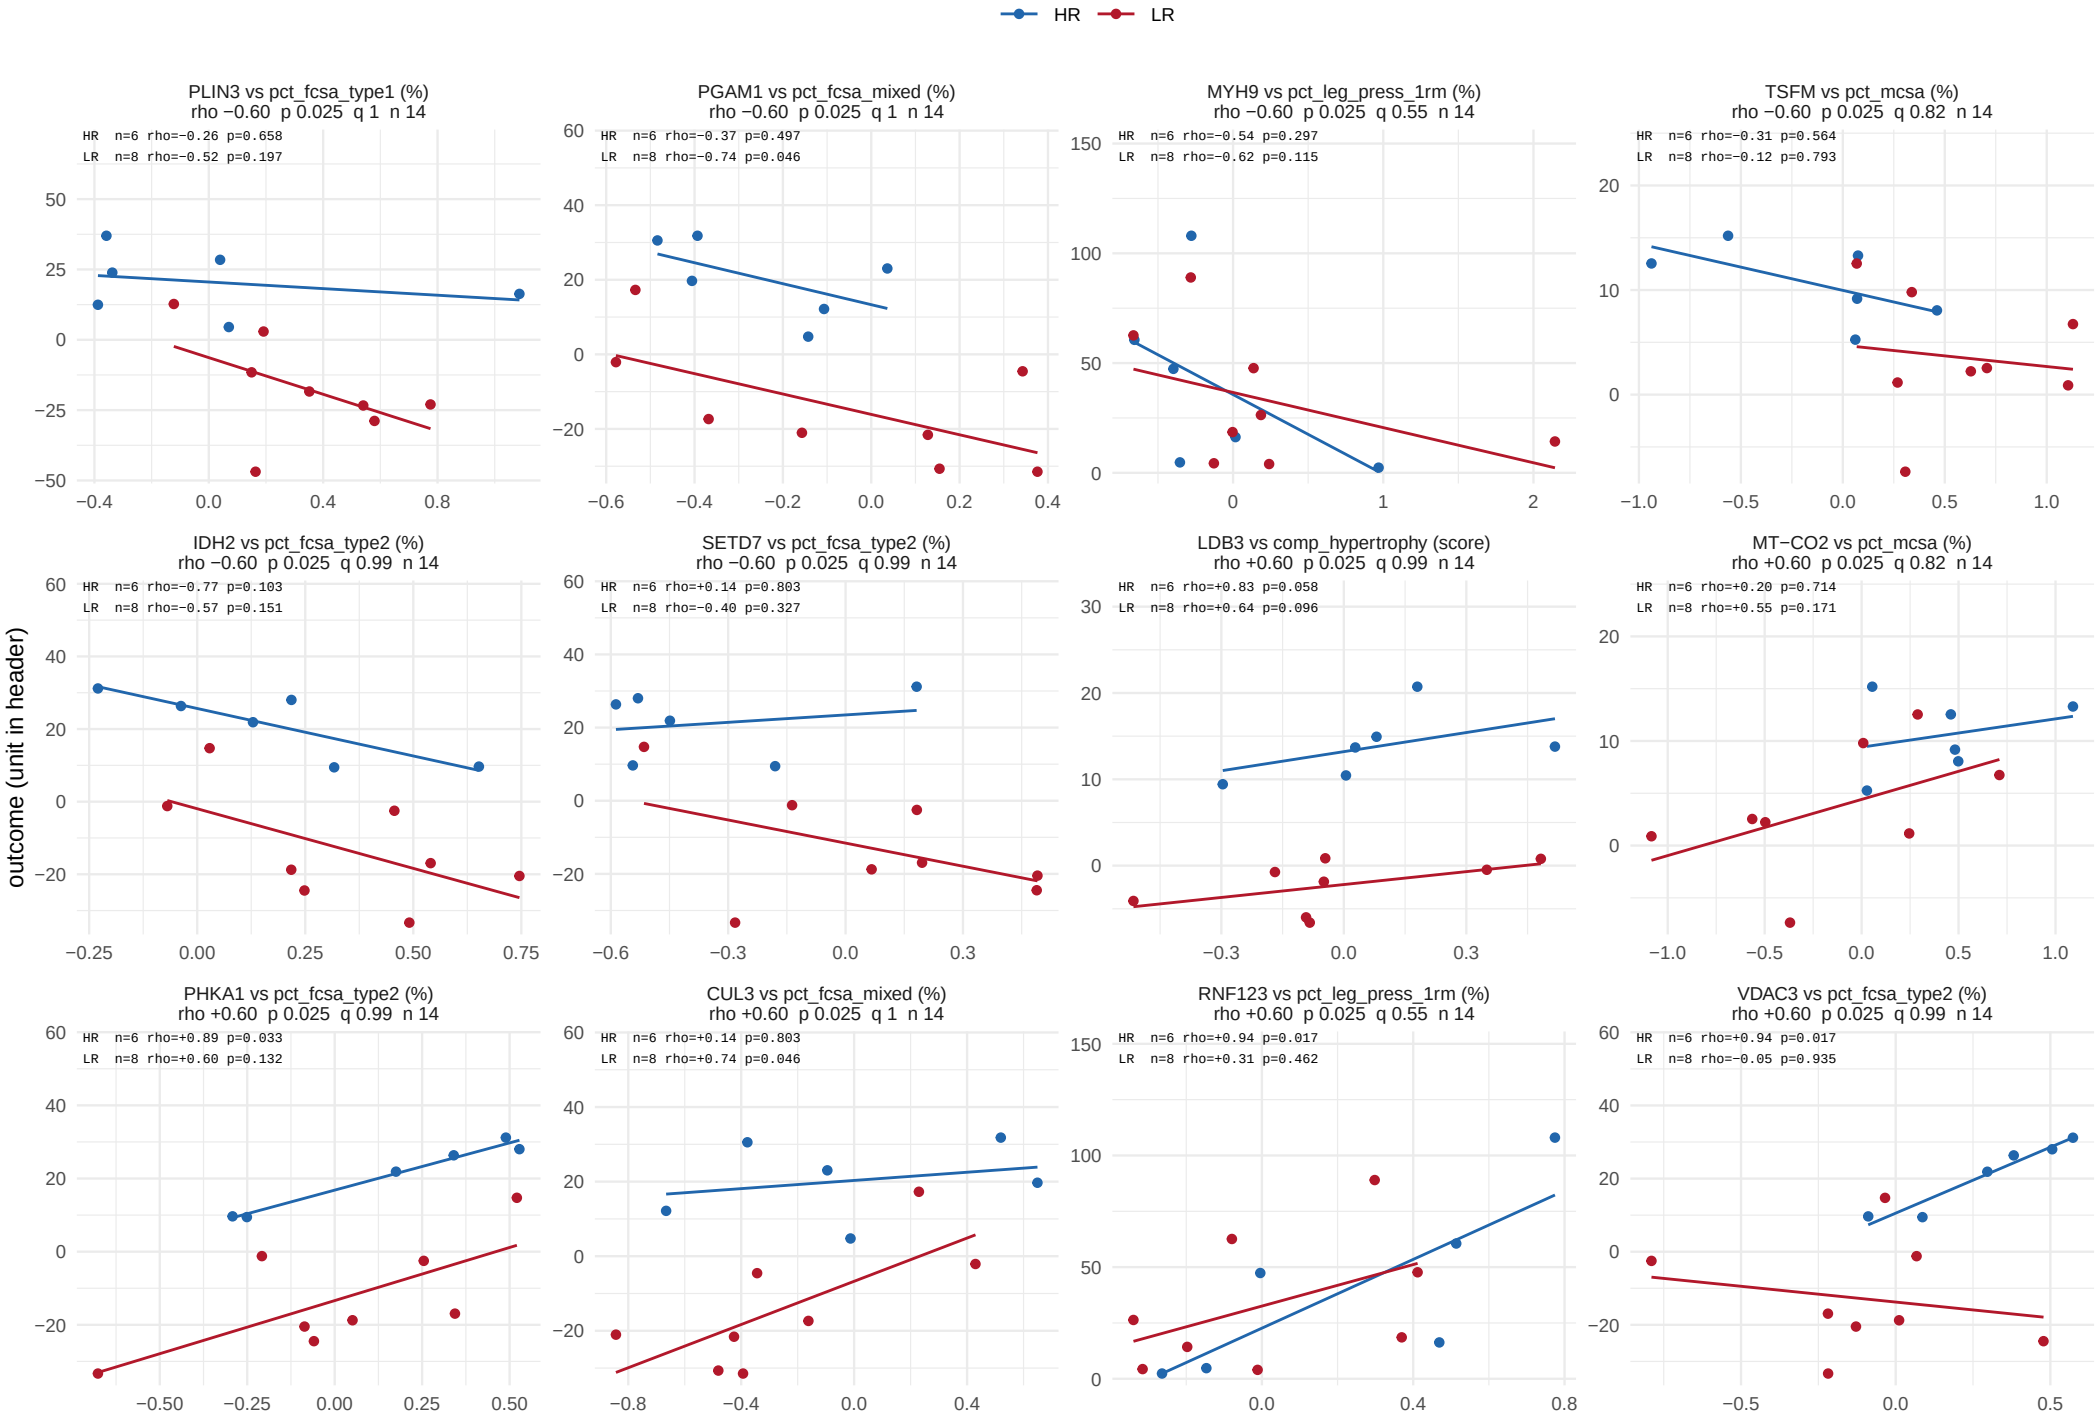

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


502 of 11286 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 23 of 42.

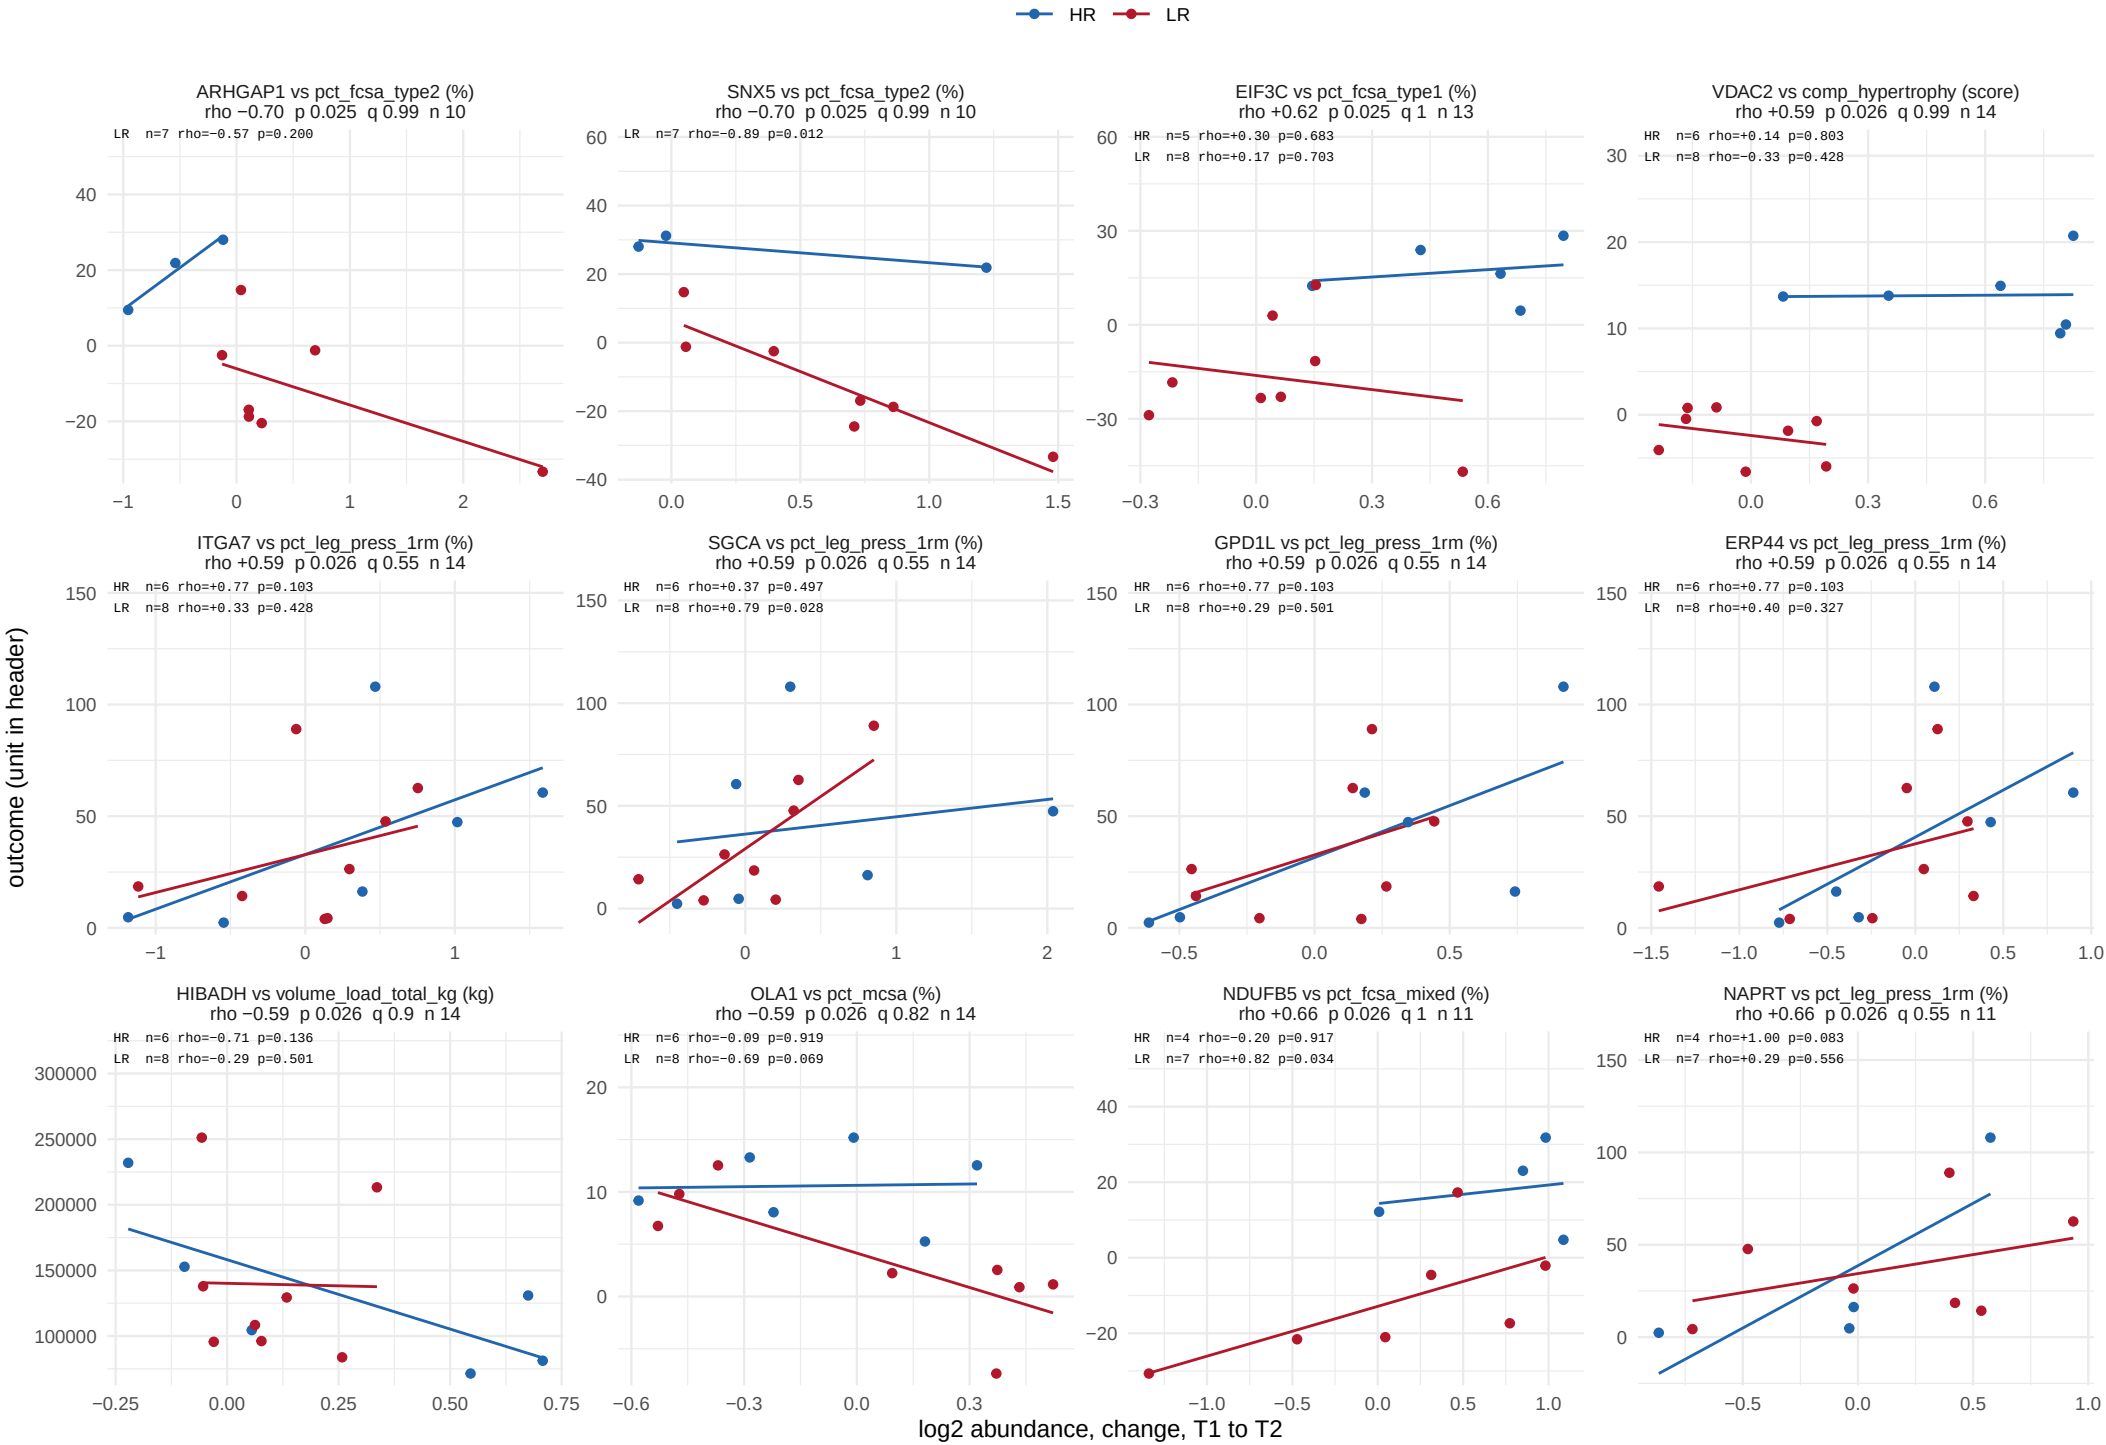

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


502 of 11286 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 24 of 42.

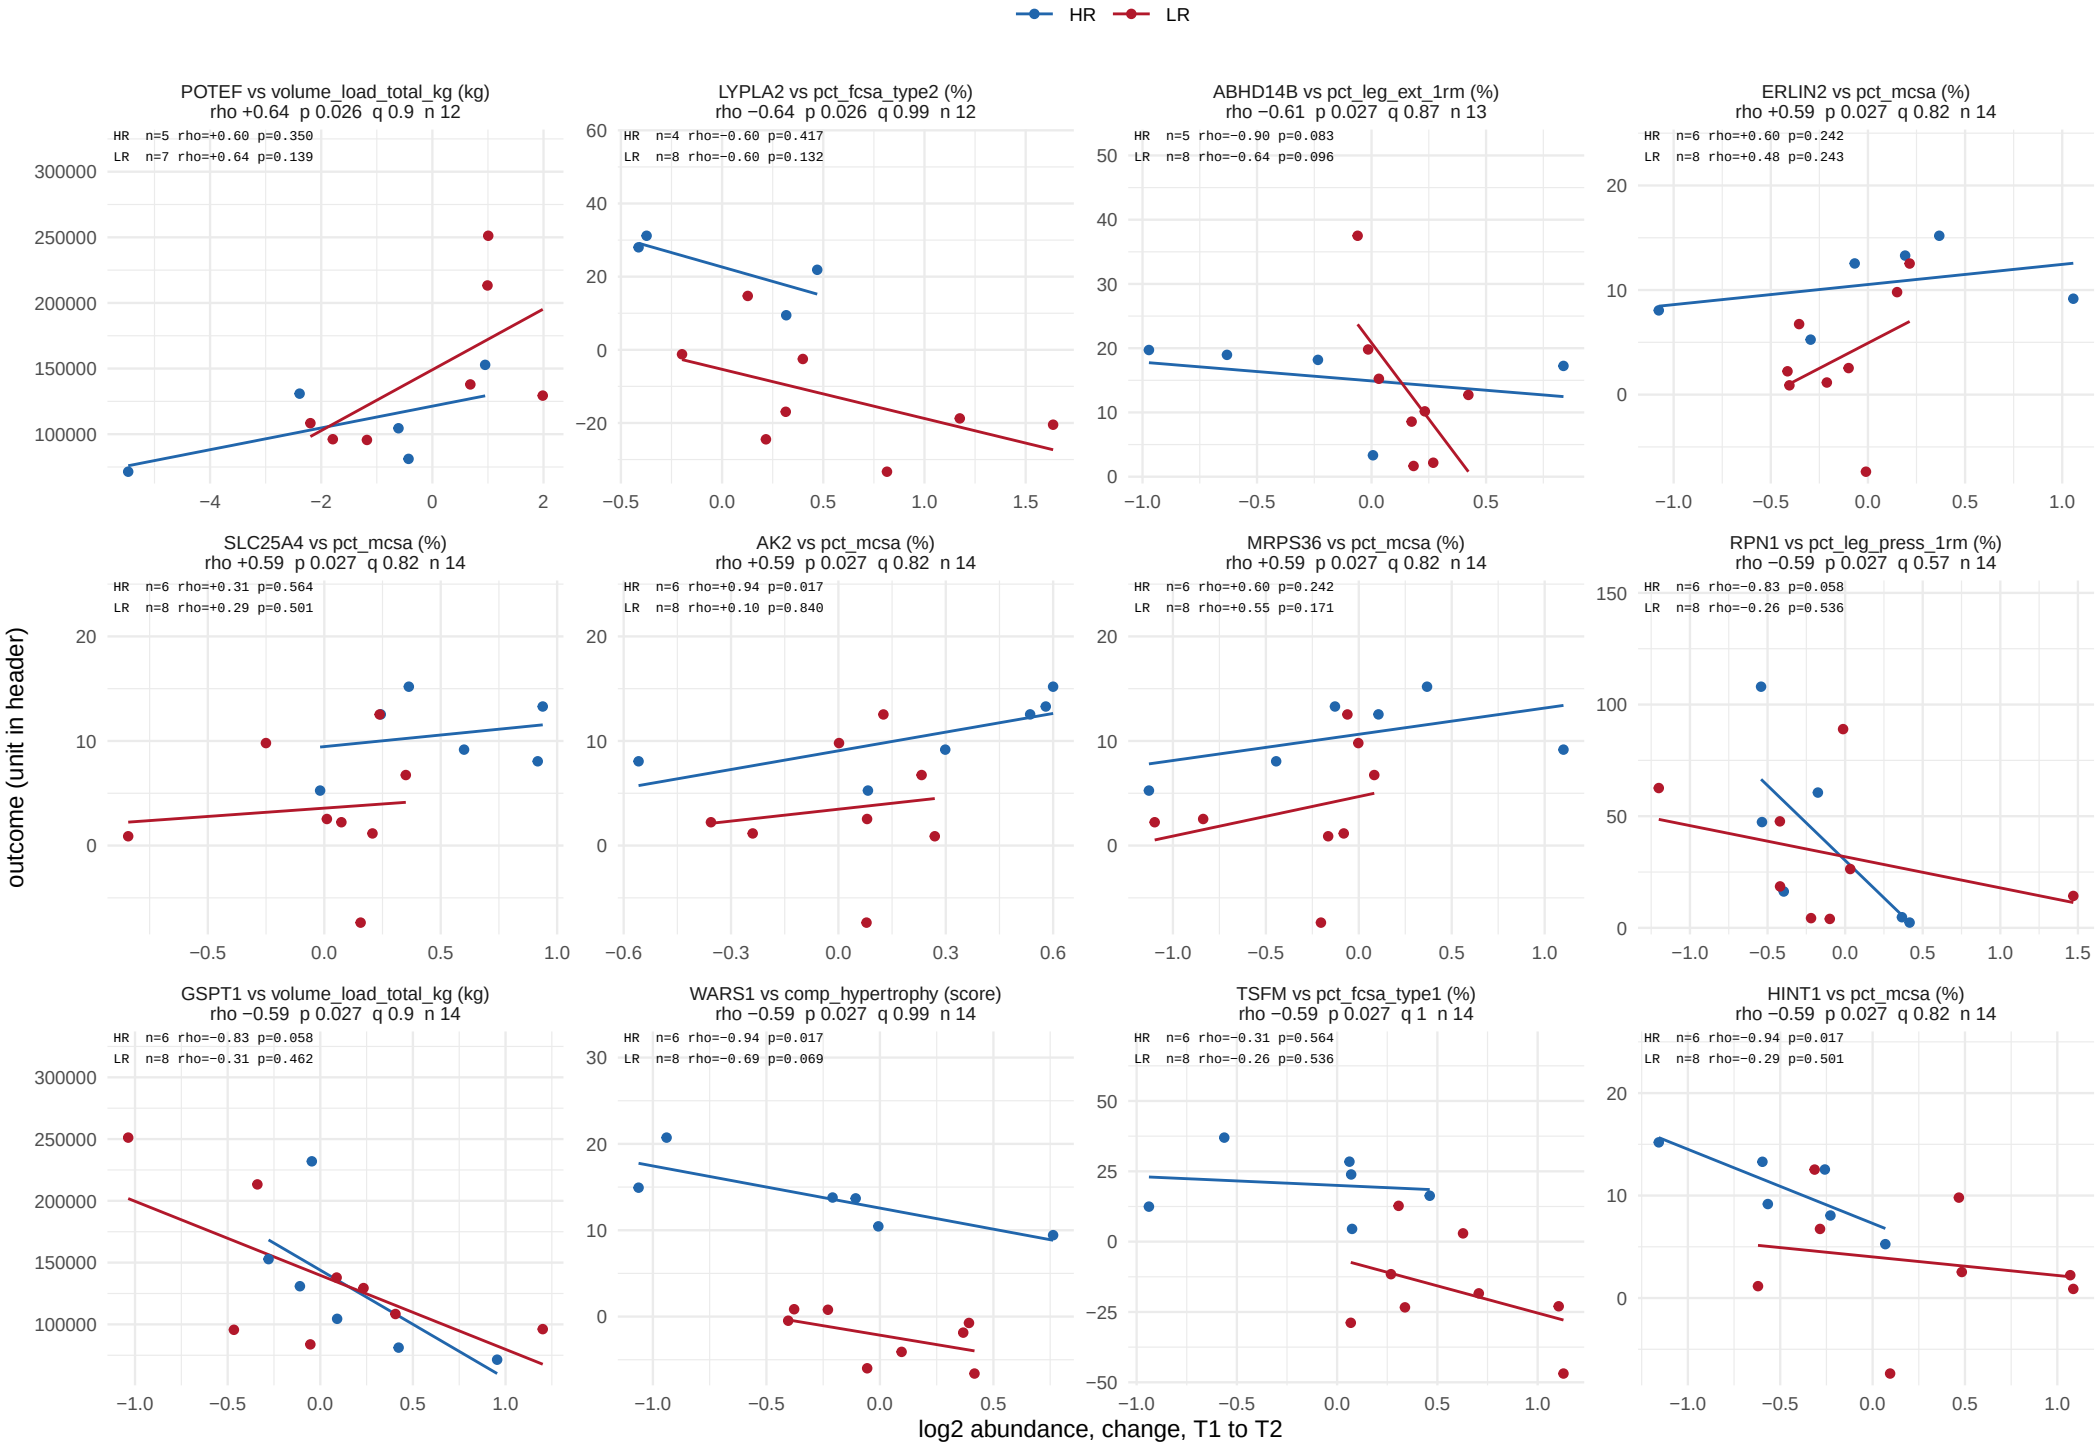

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


502 of 11286 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 25 of 42.

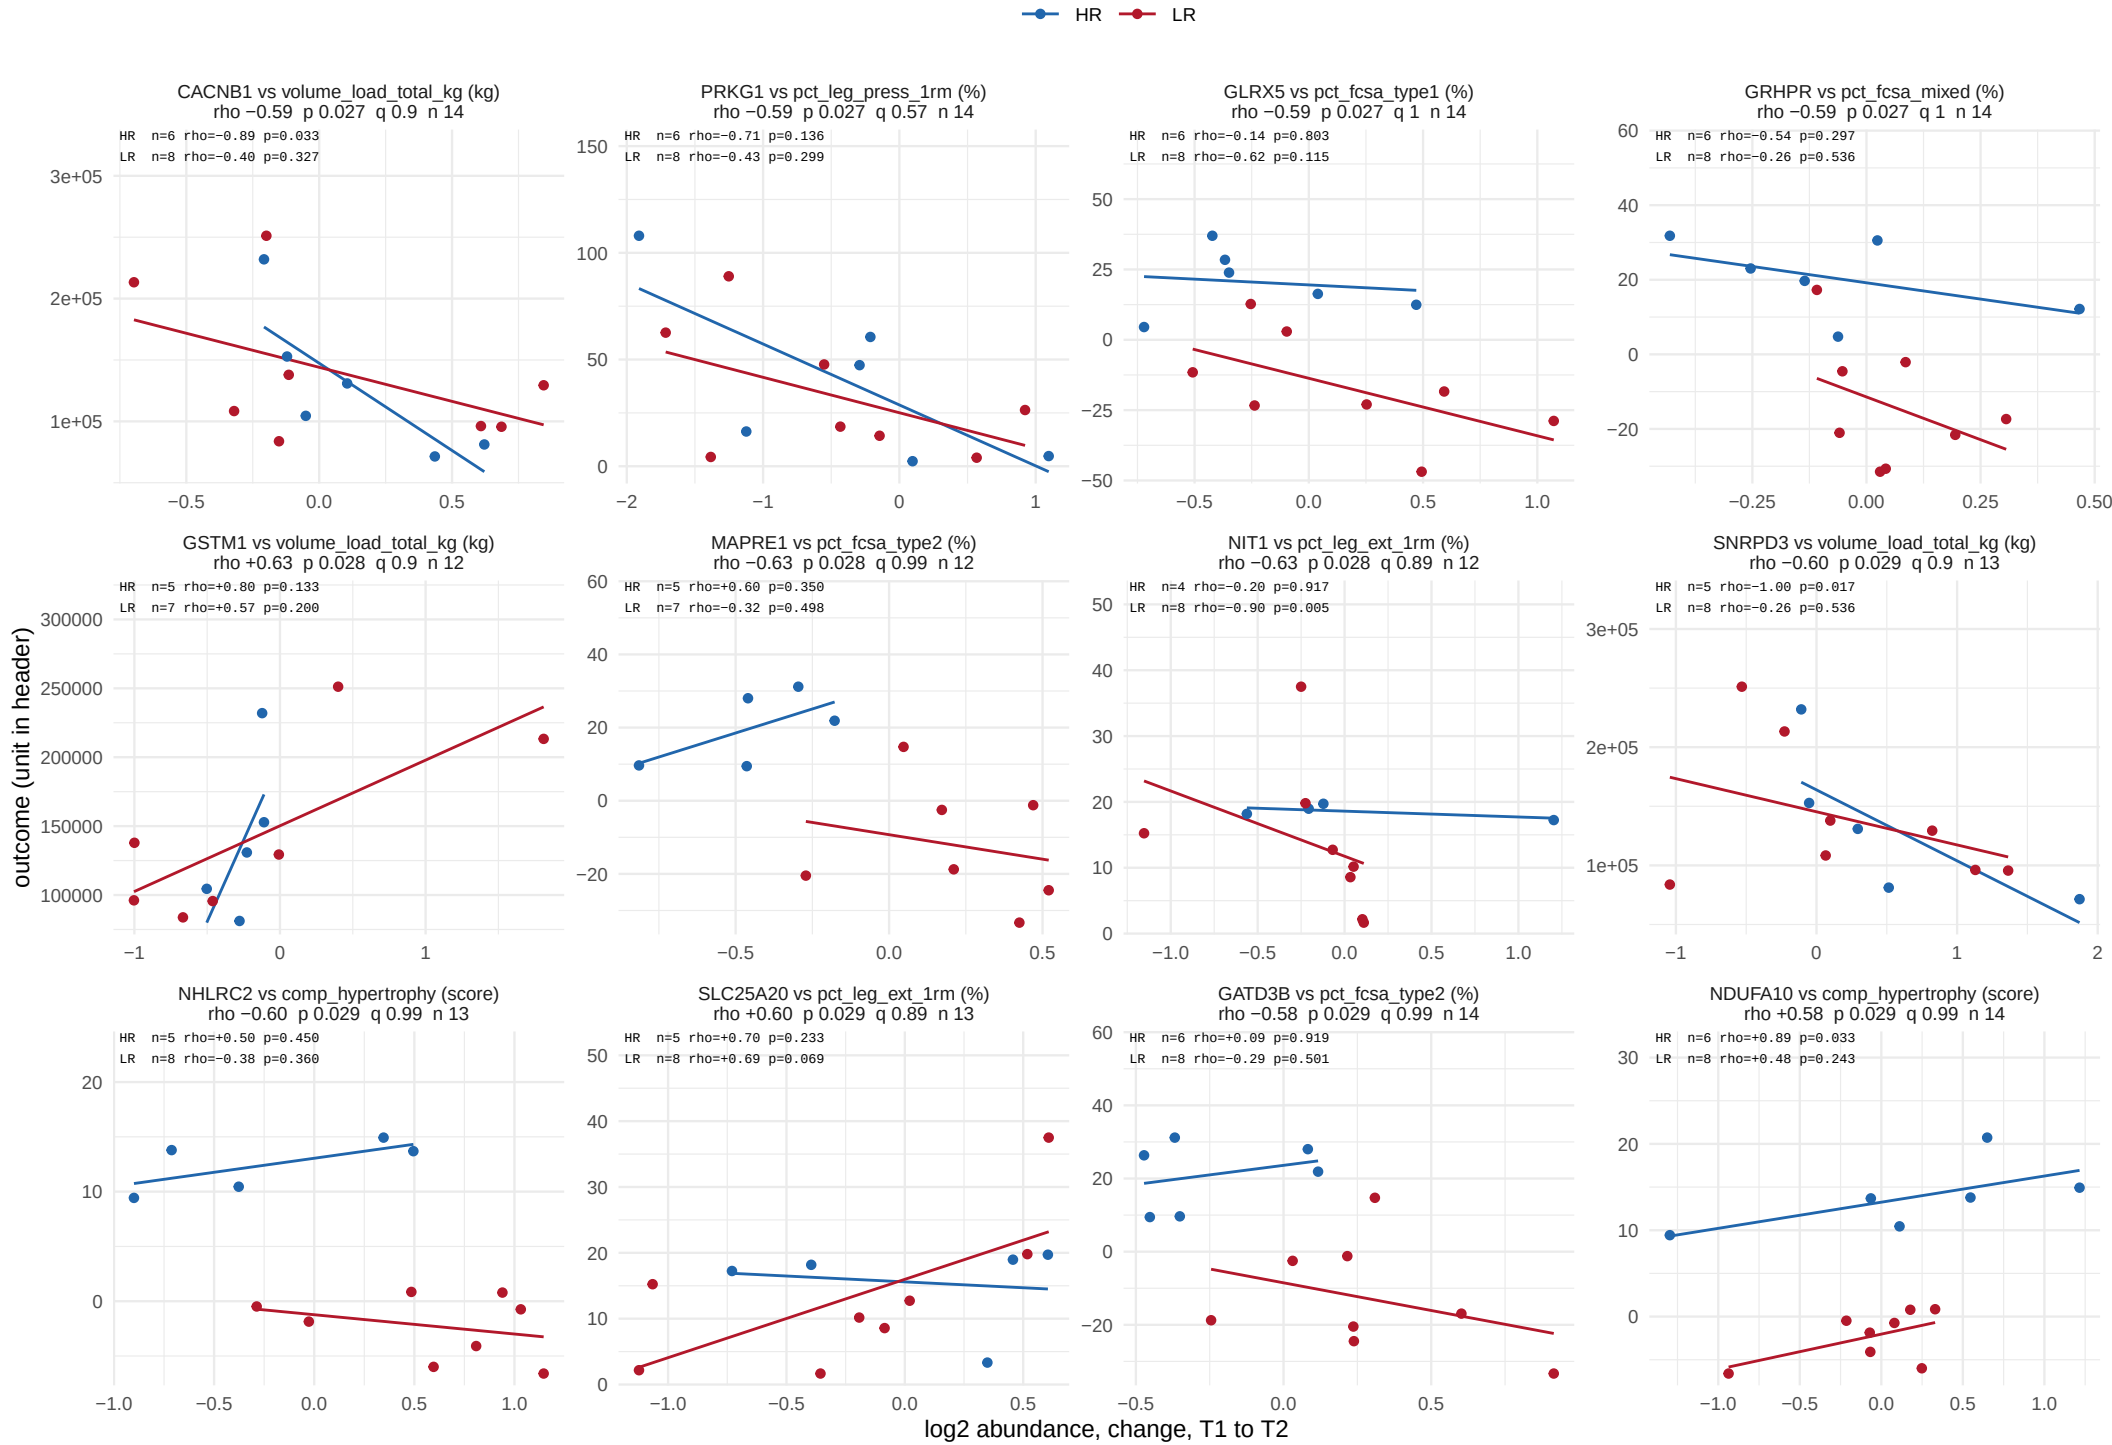

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


502 of 11286 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 26 of 42.

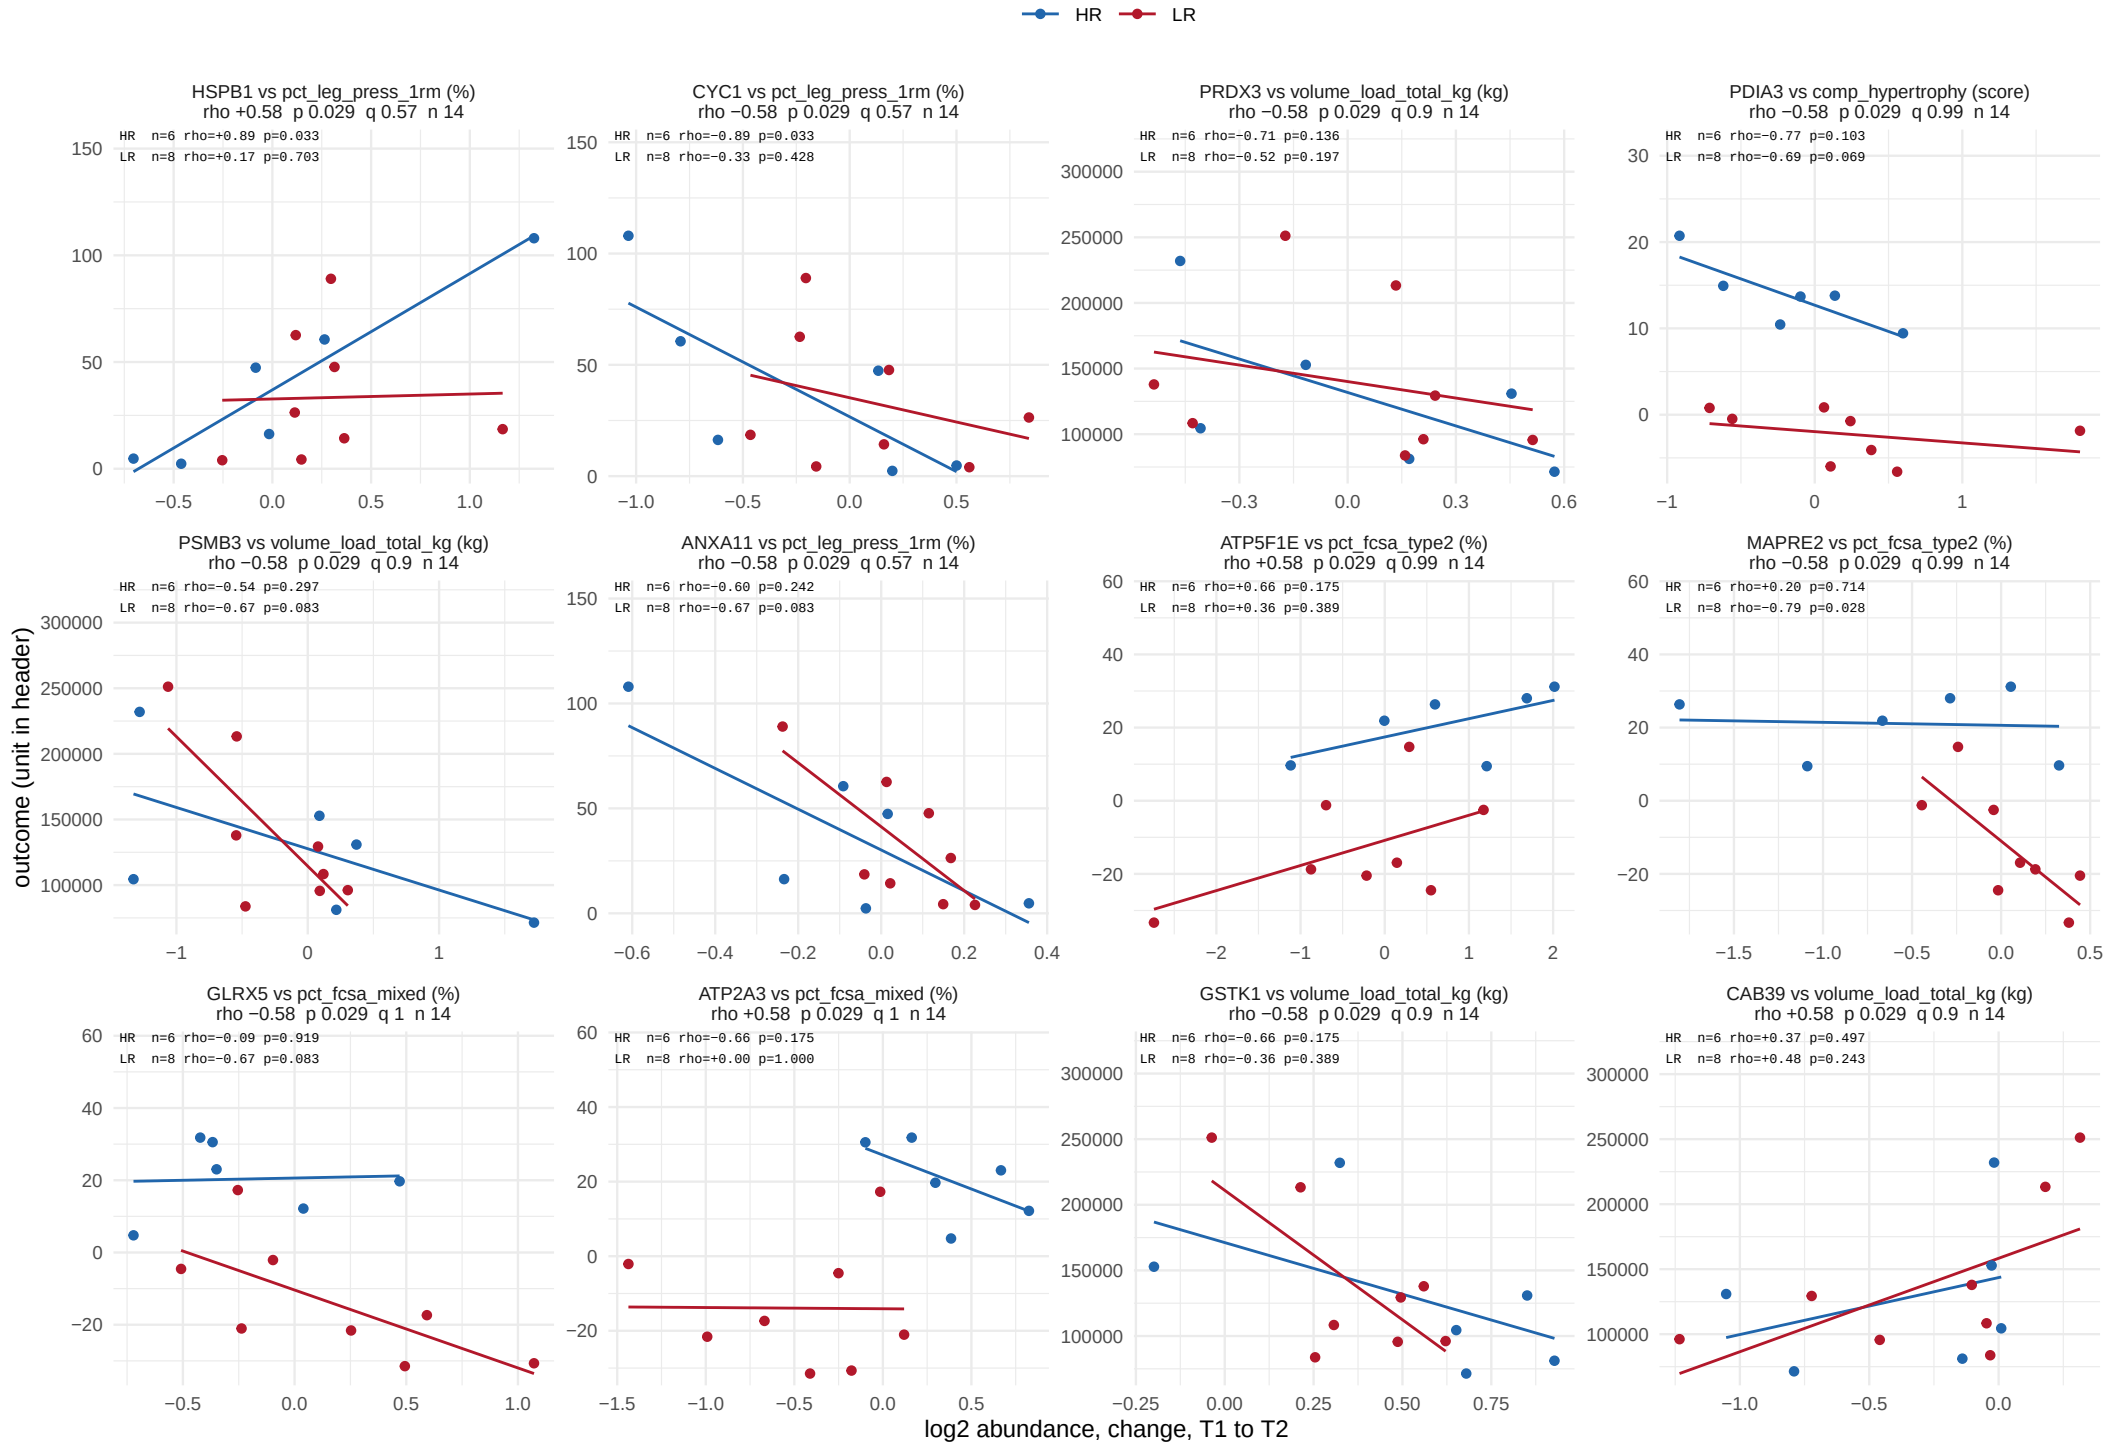

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


502 of 11286 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 27 of 42.

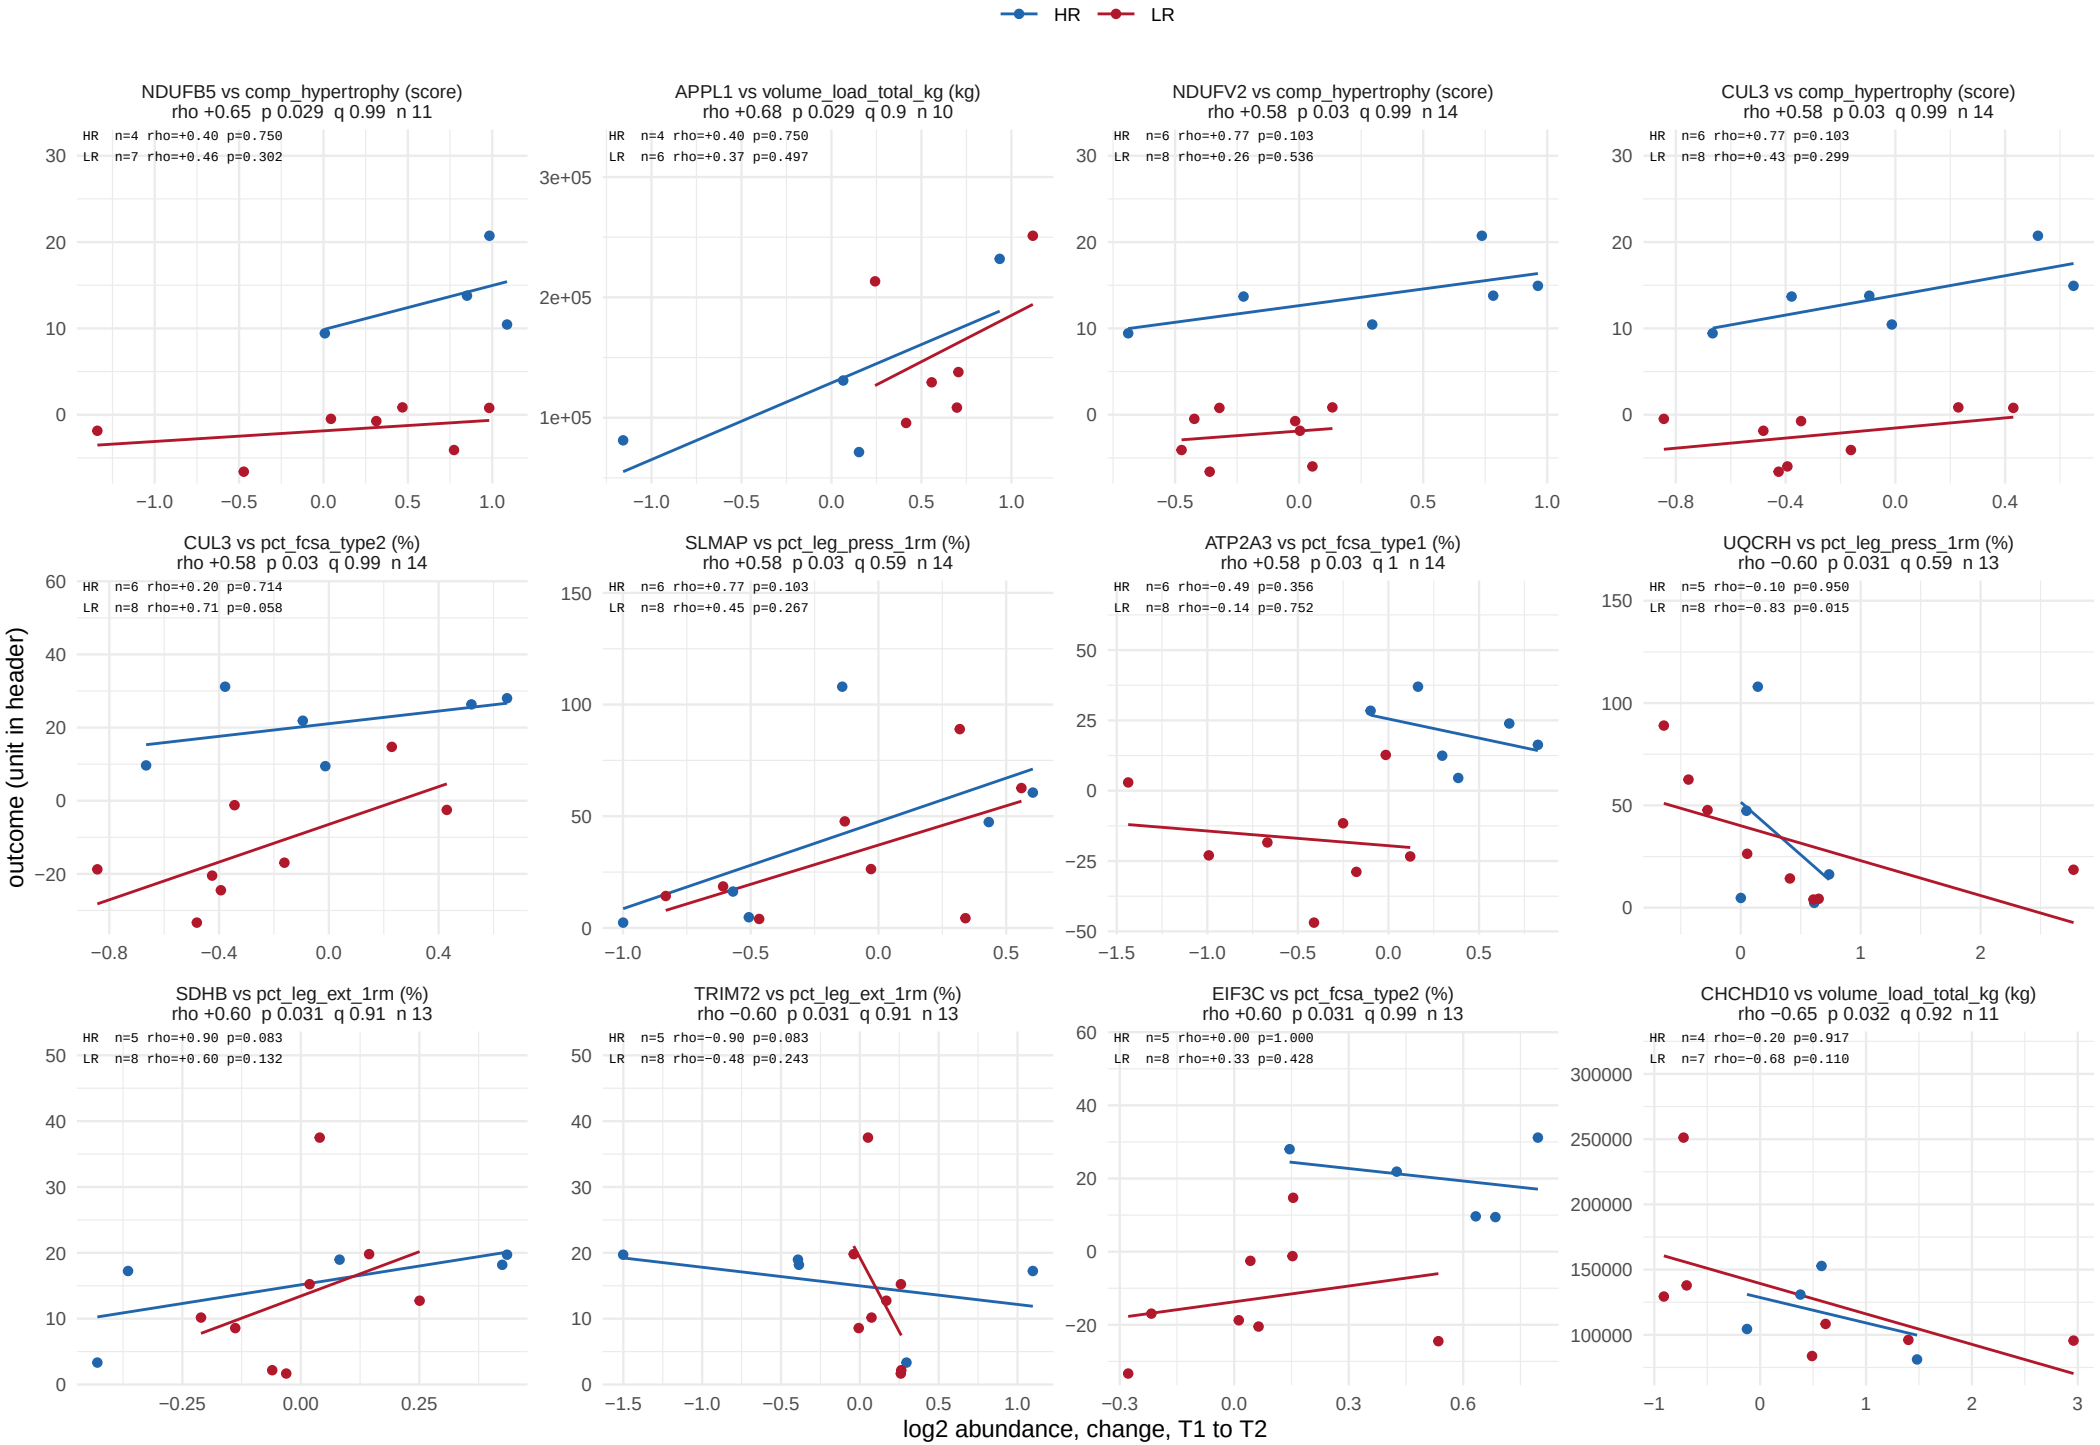

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


502 of 11286 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 28 of 42.

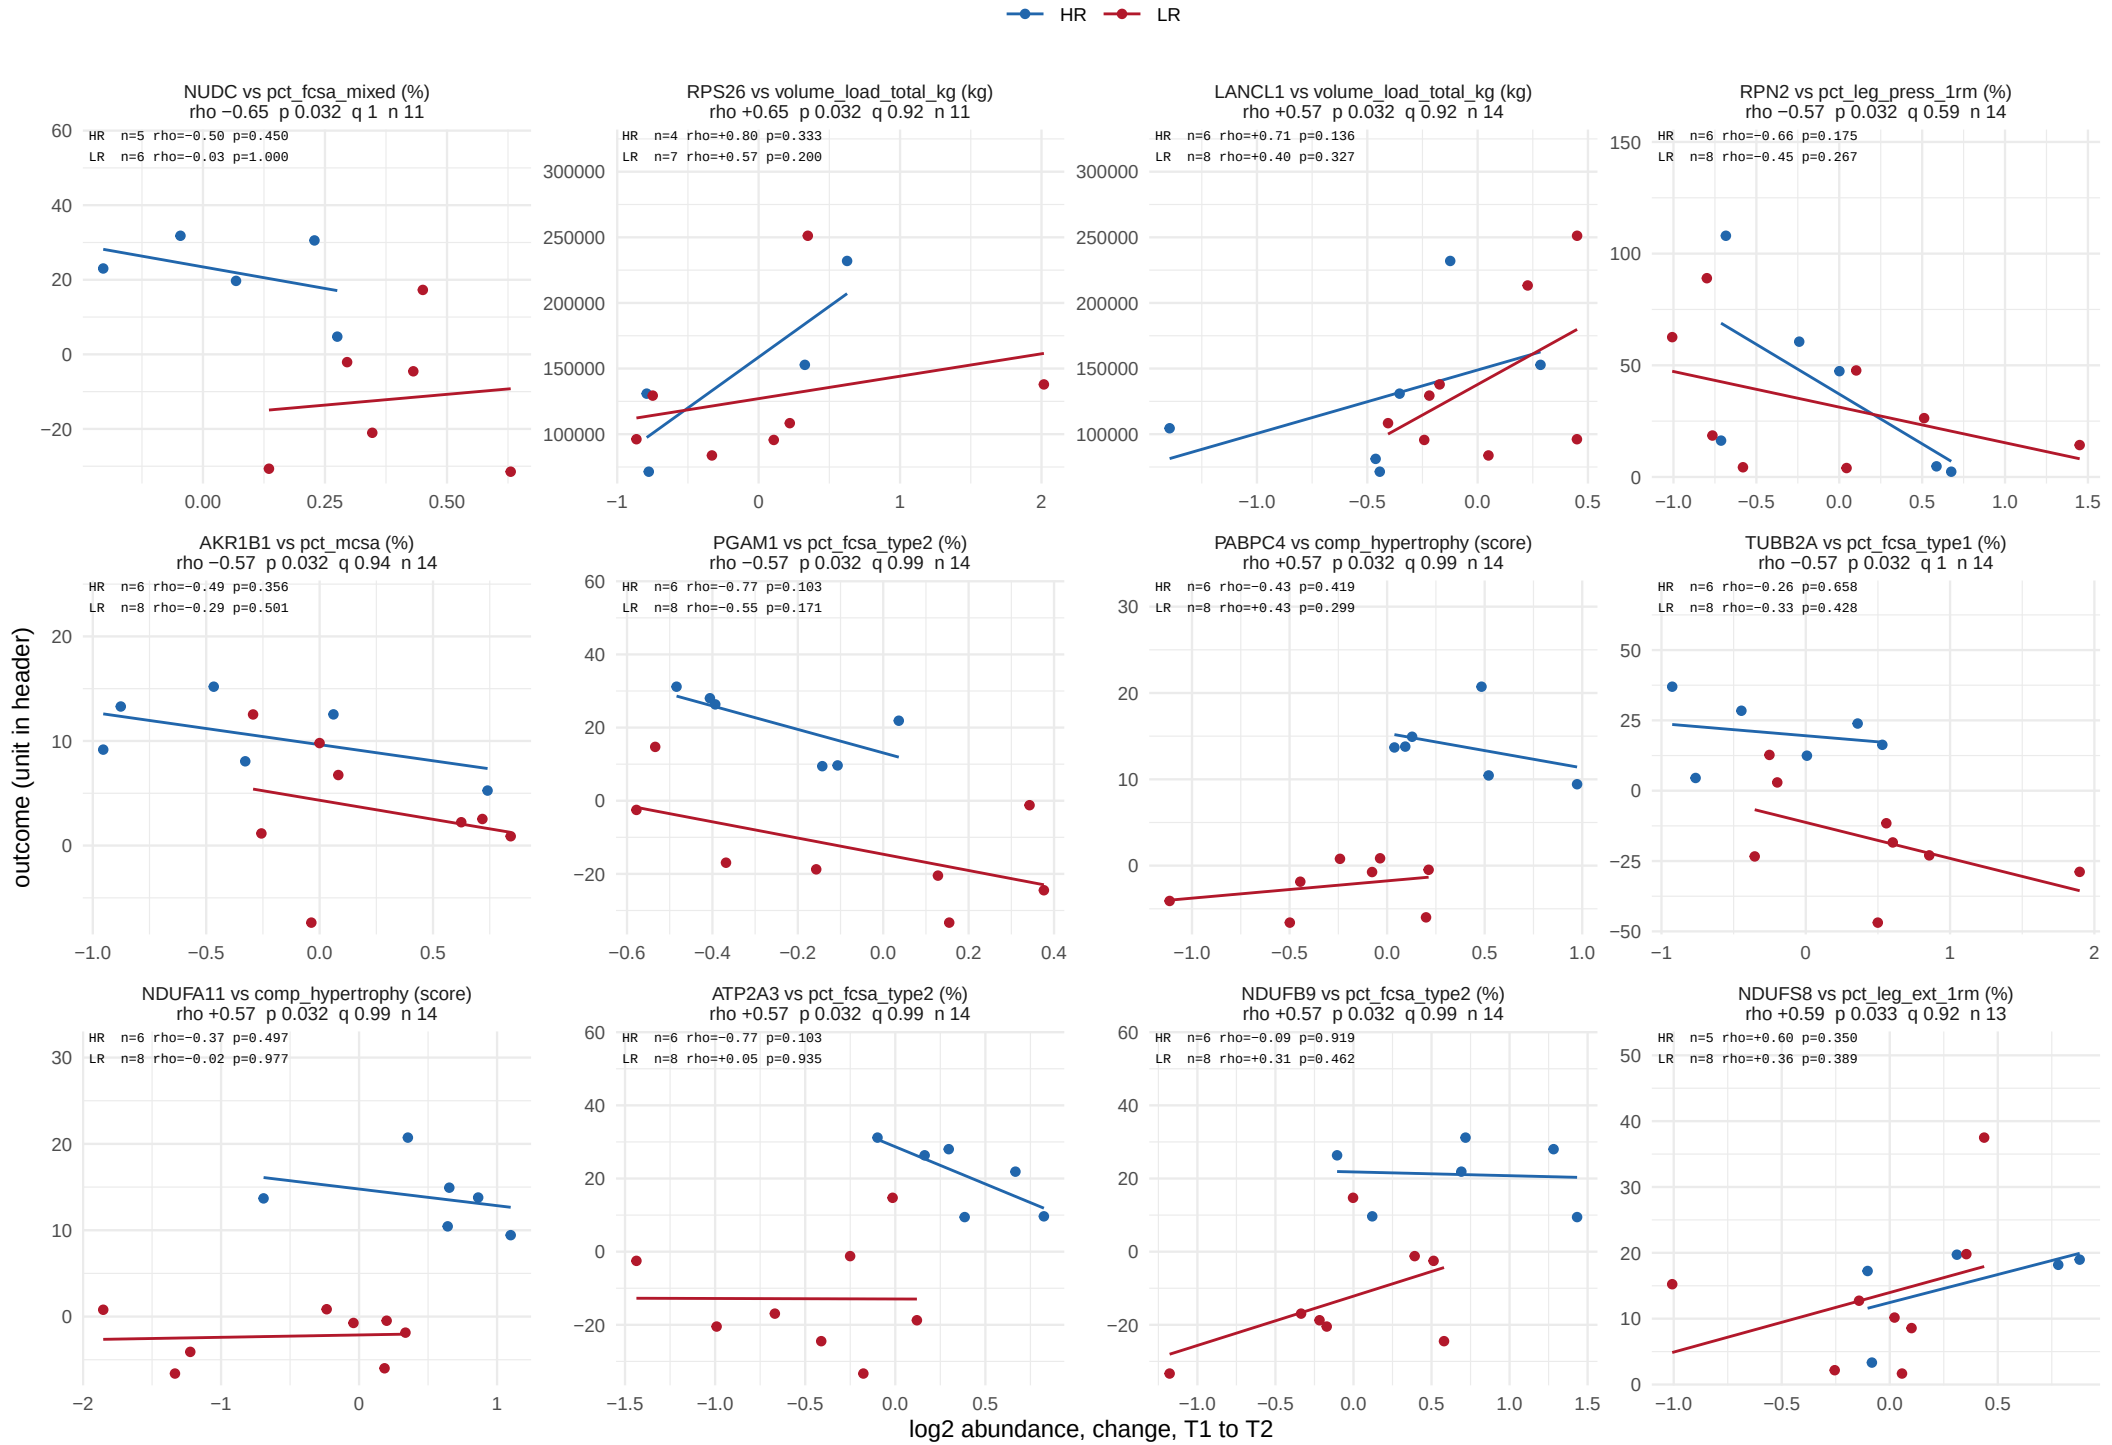

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


502 of 11286 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 29 of 42.

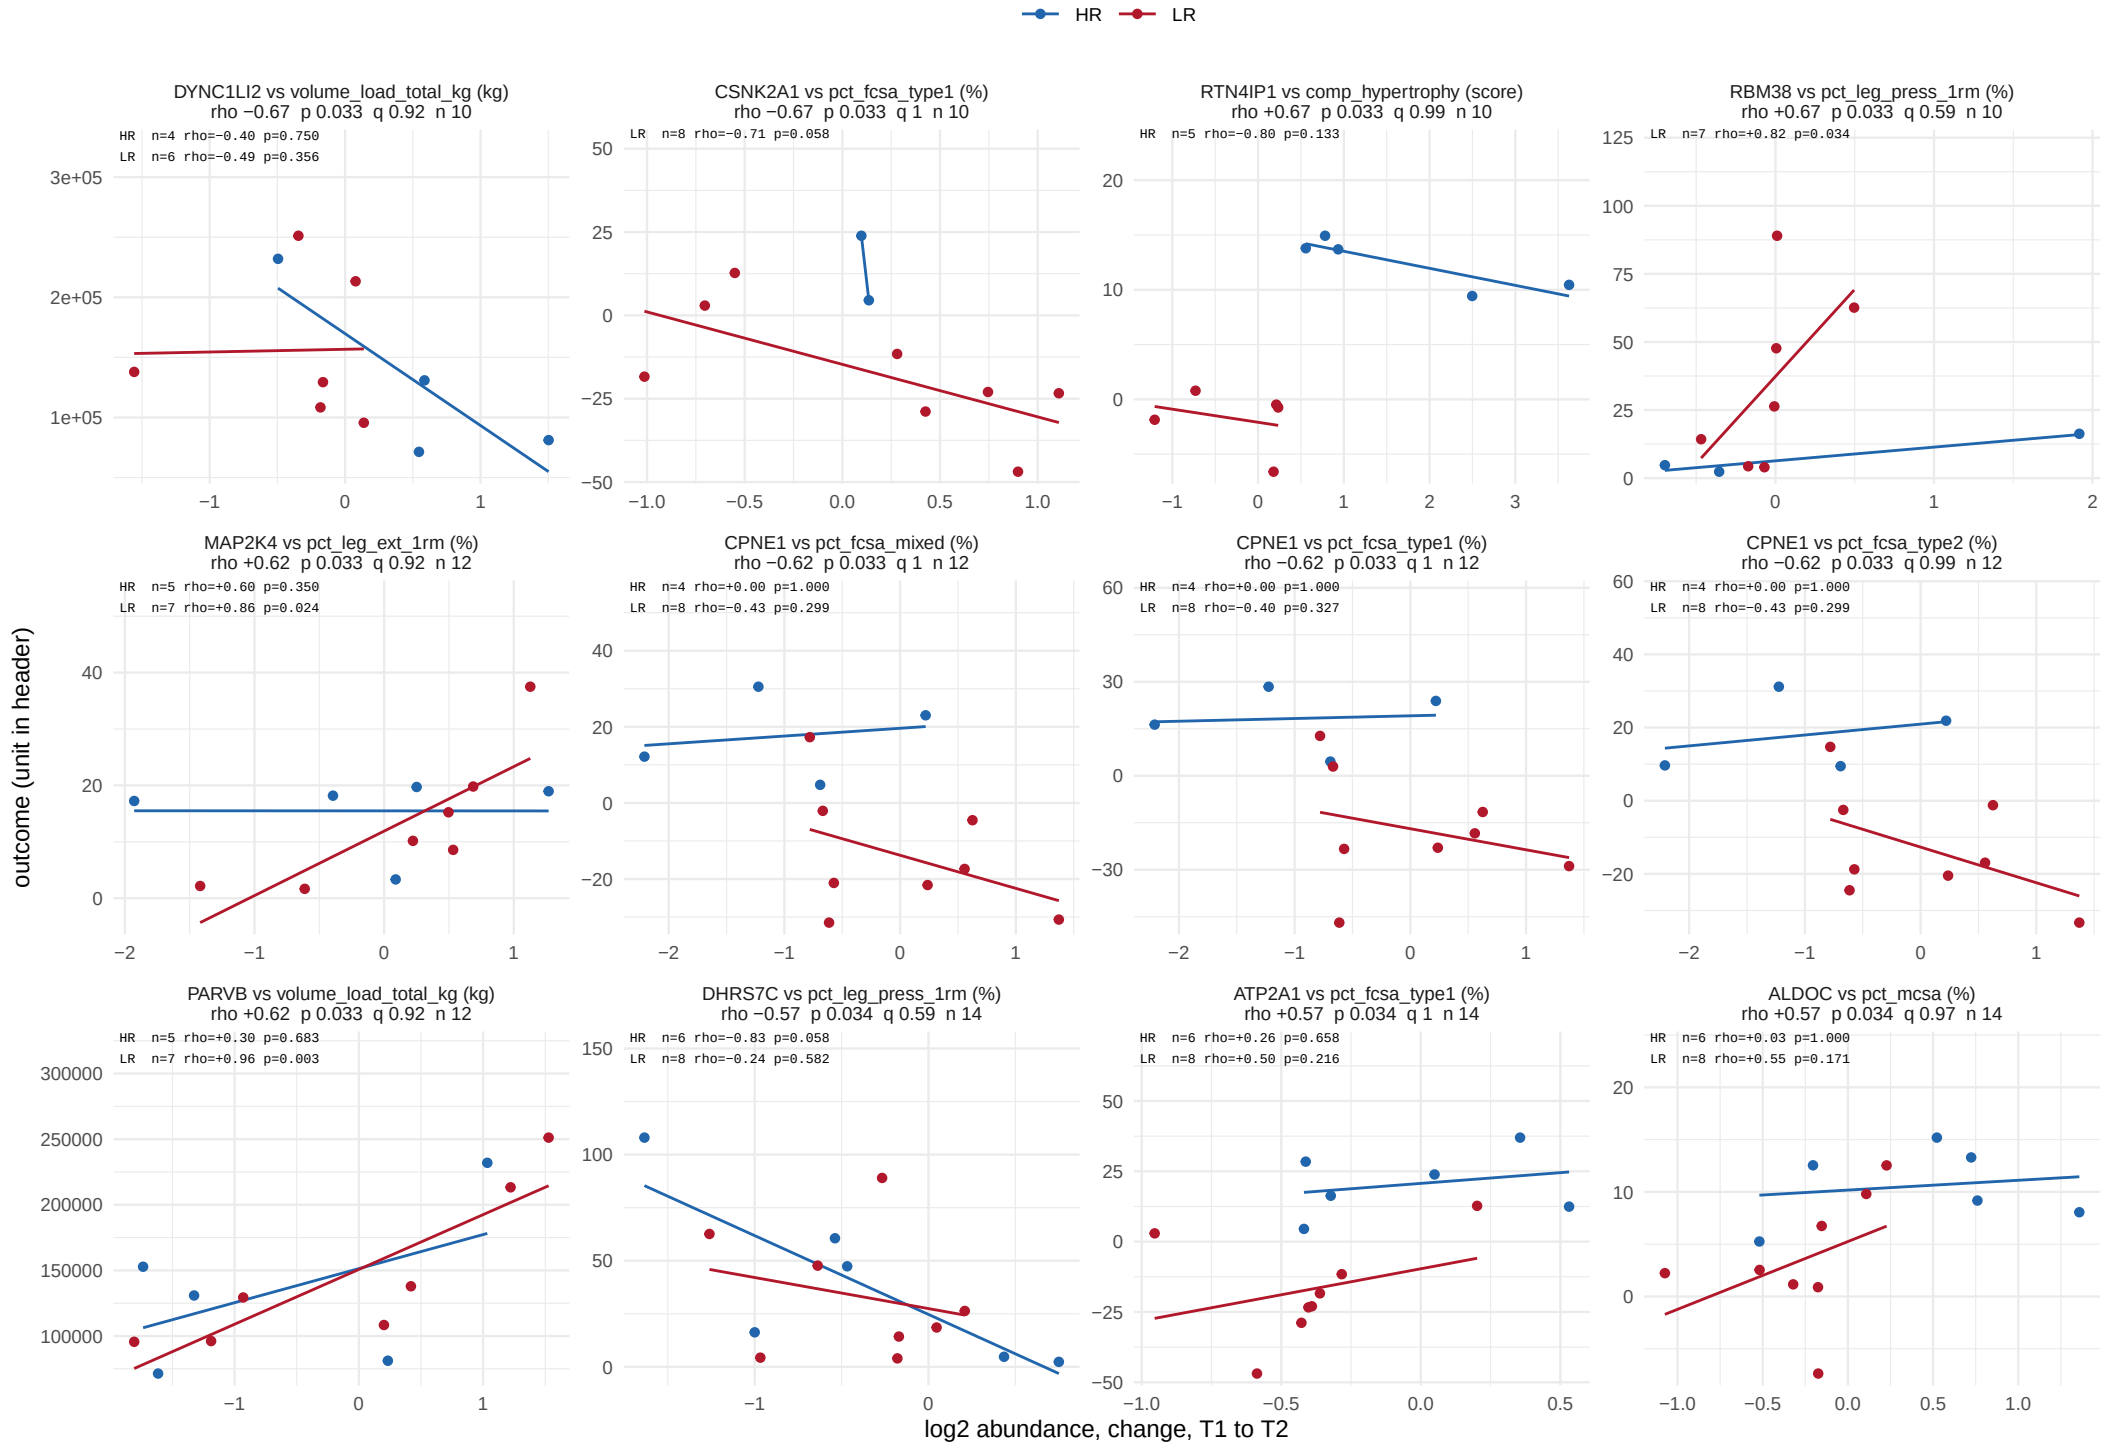

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


502 of 11286 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 30 of 42.

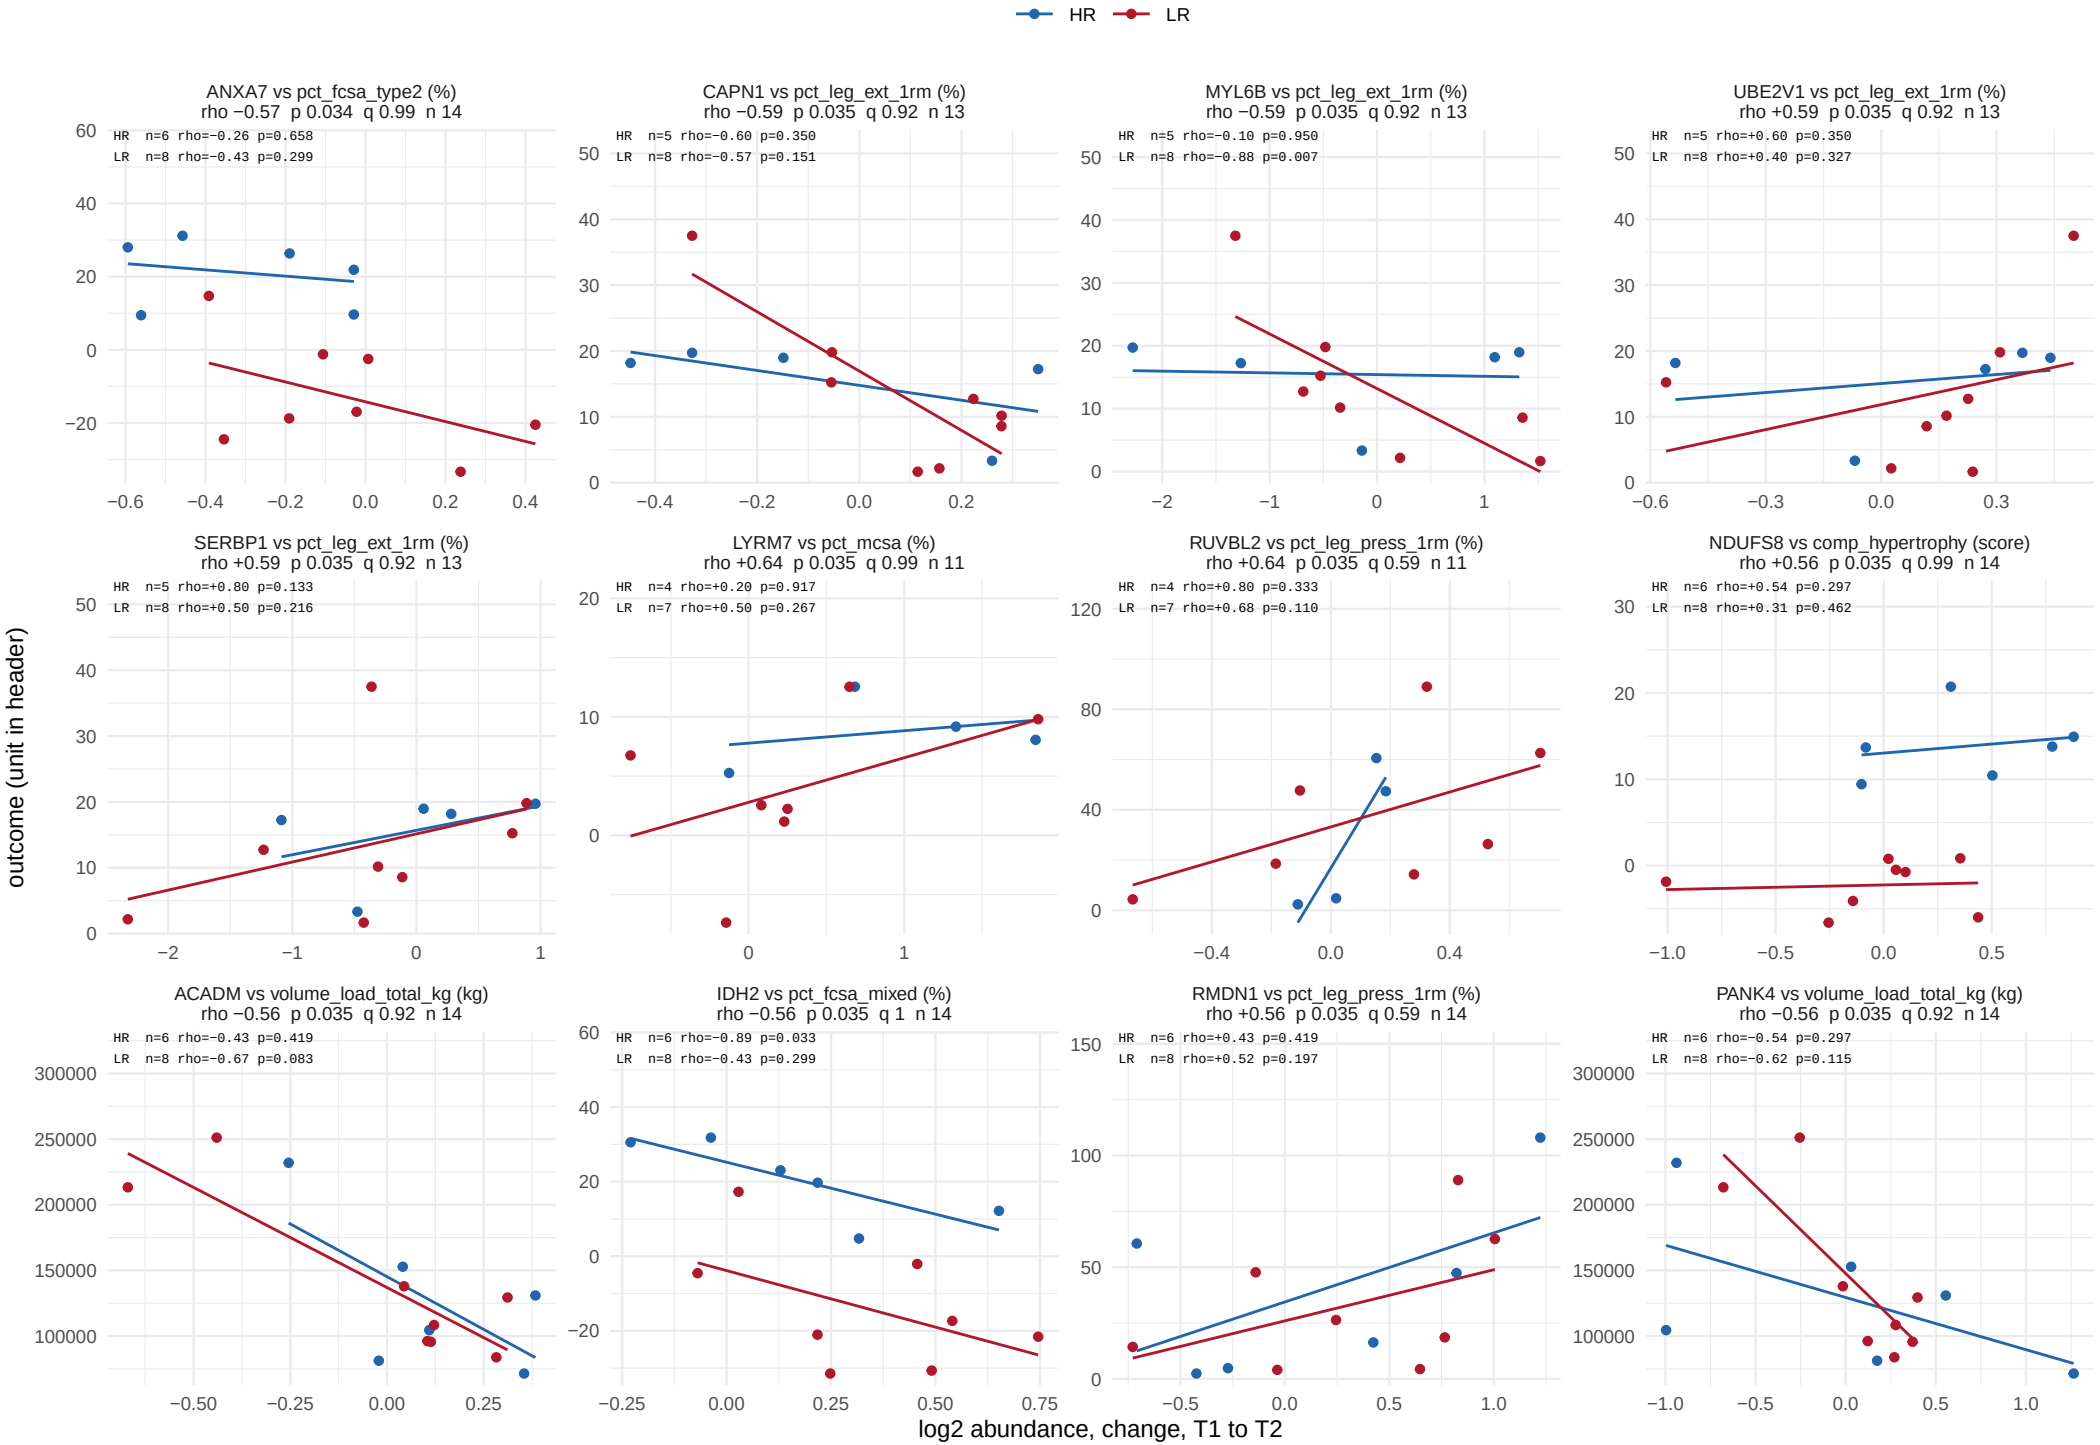

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


502 of 11286 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 31 of 42.

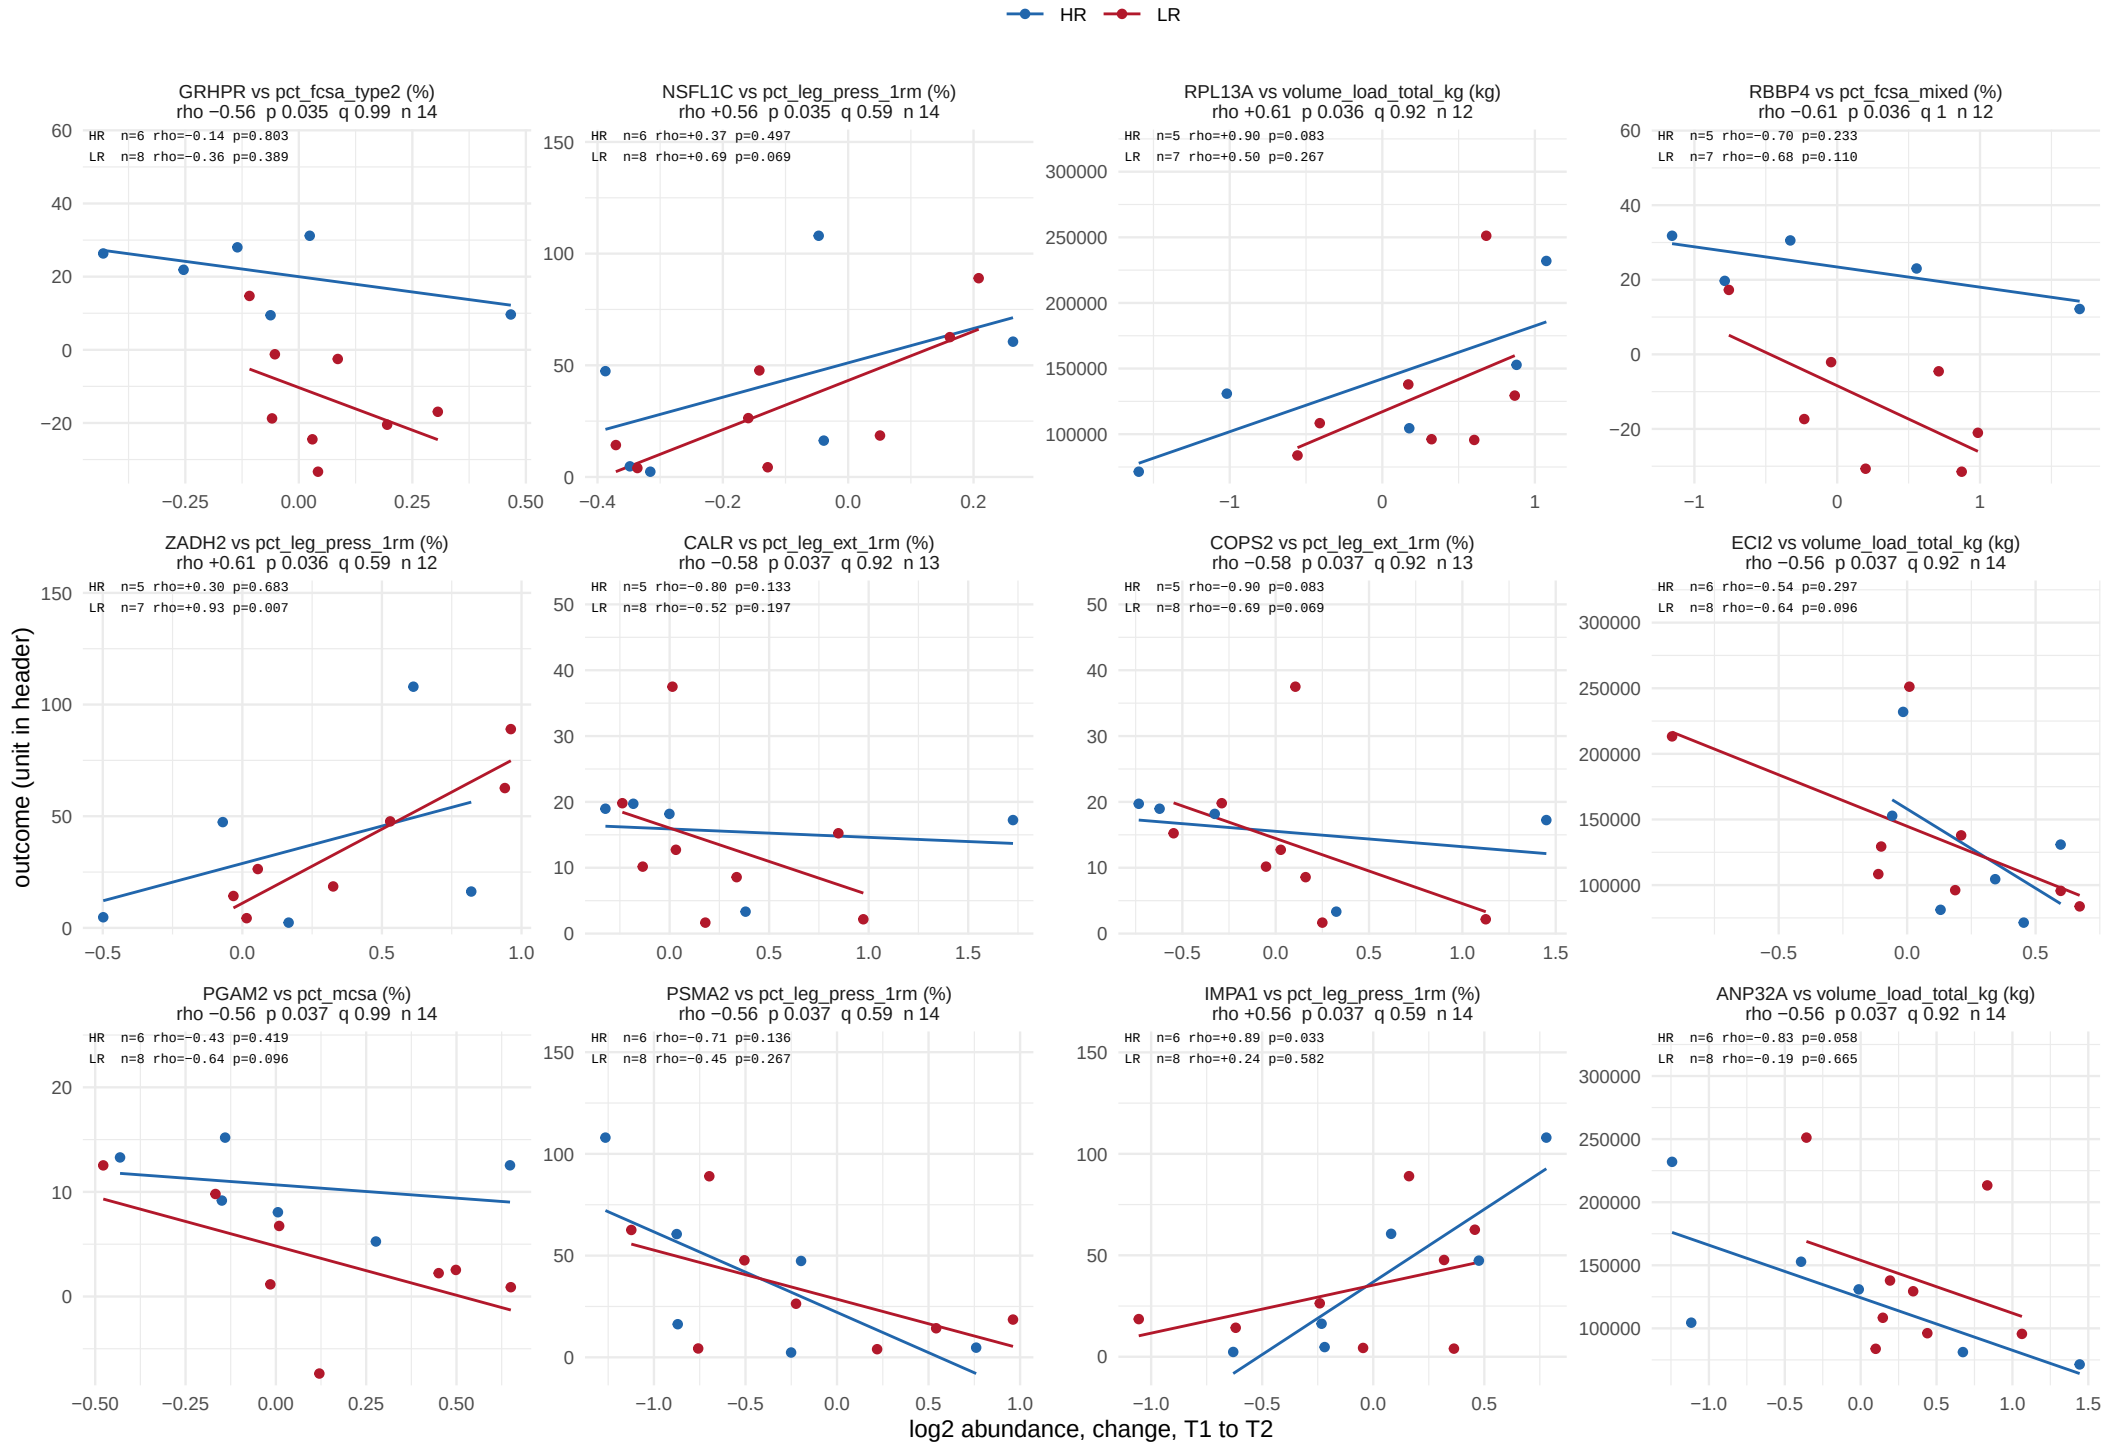

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


502 of 11286 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 32 of 42.

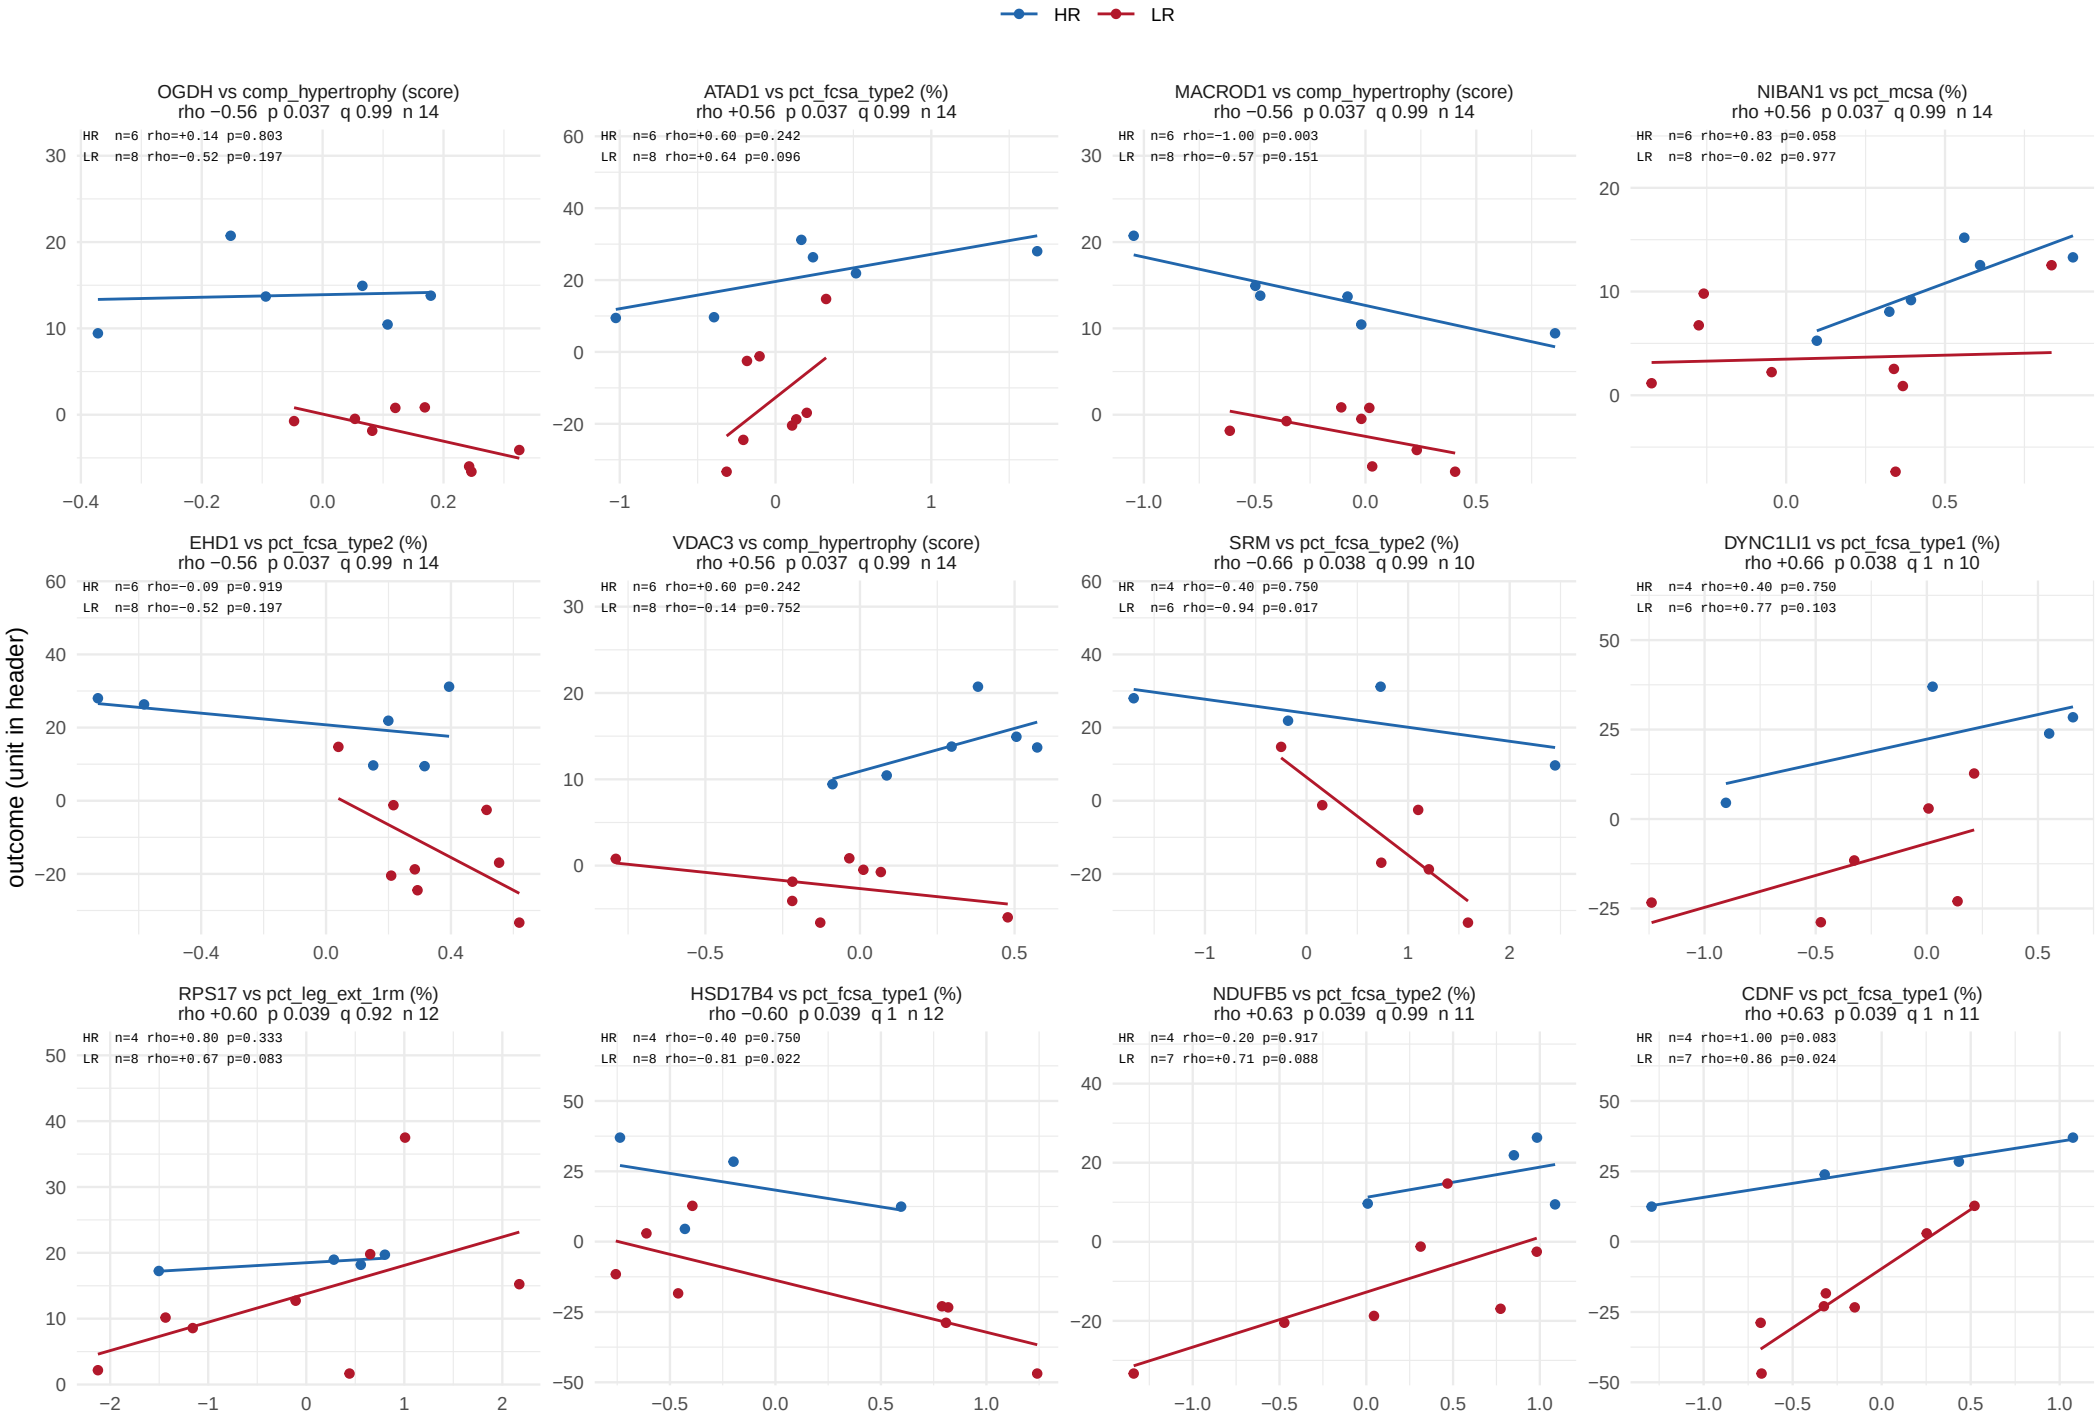

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


502 of 11286 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 33 of 42.

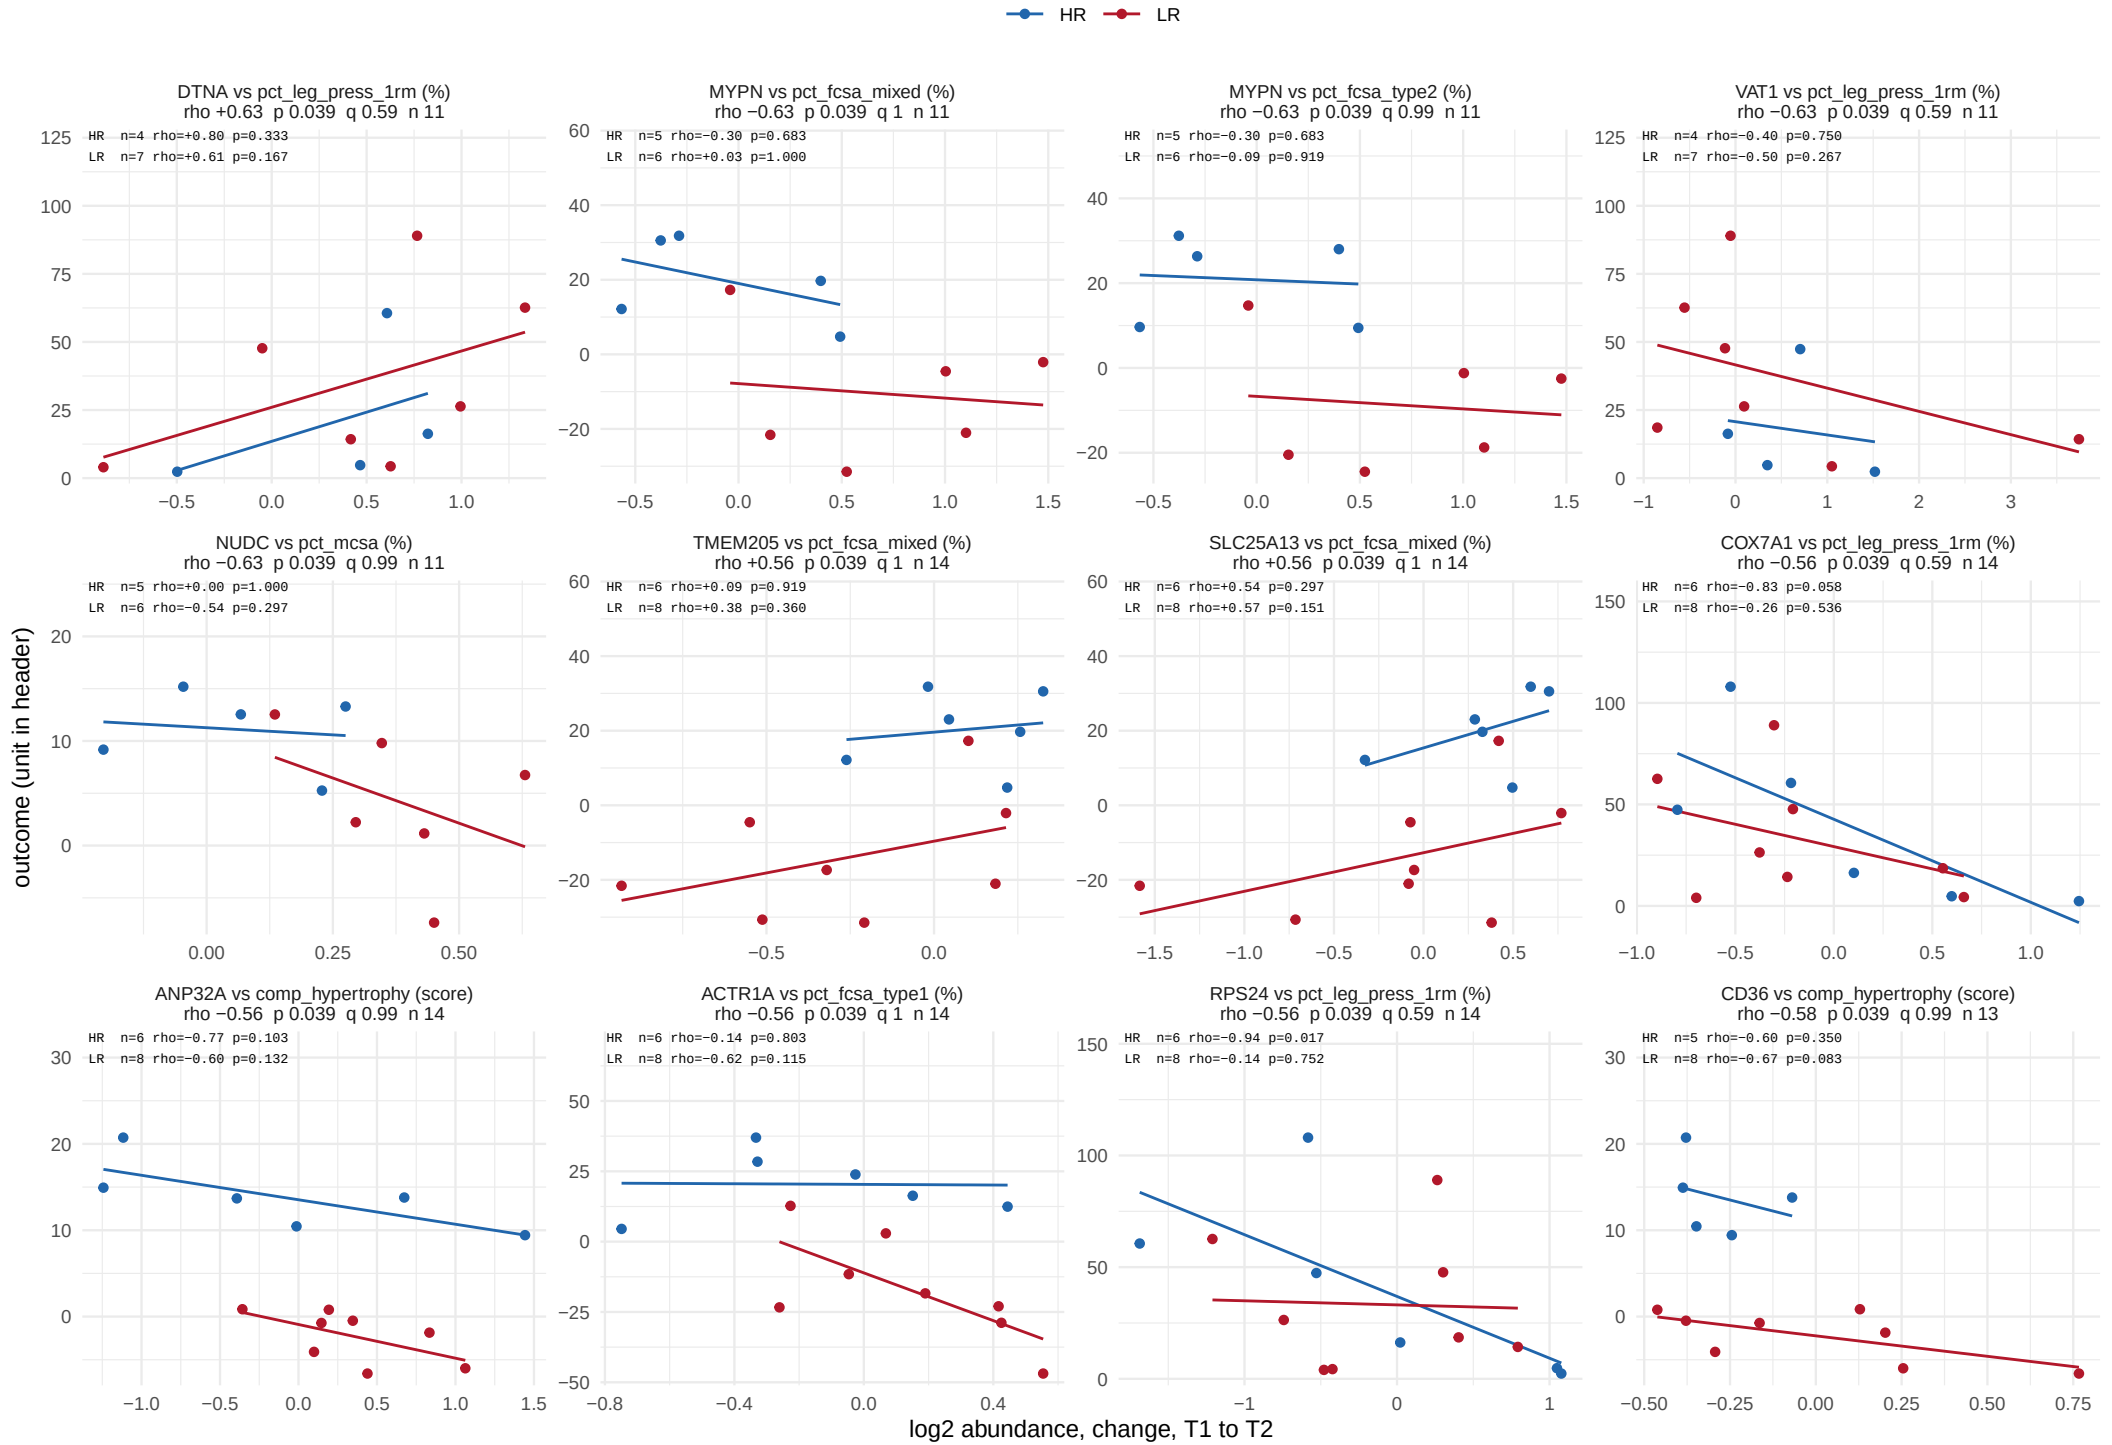

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


502 of 11286 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 34 of 42.

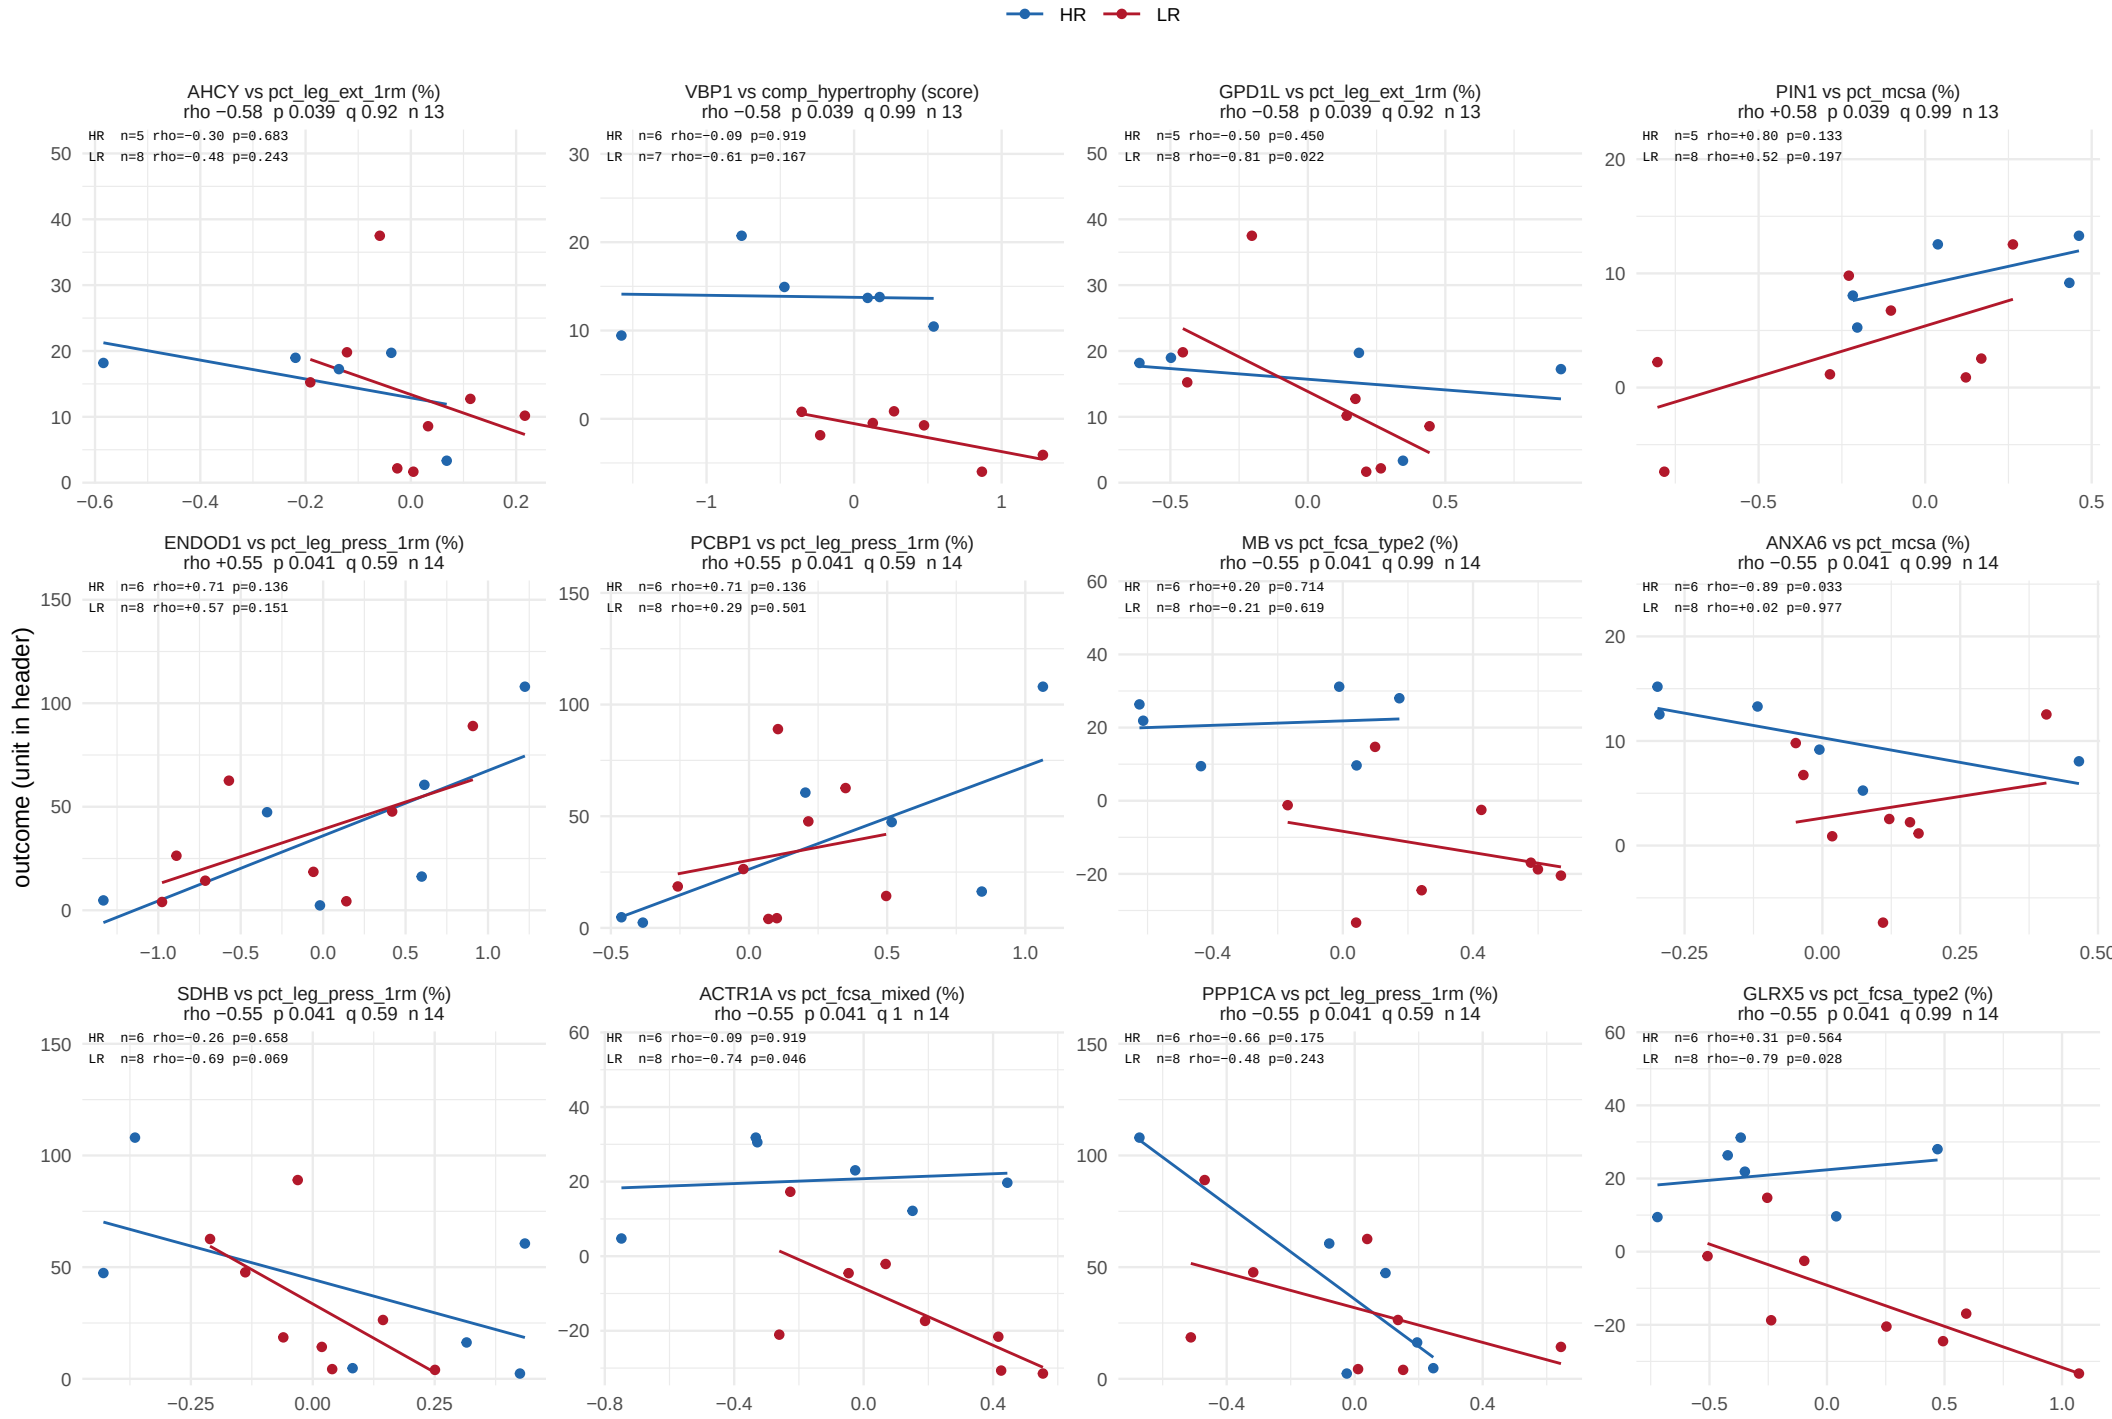

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


502 of 11286 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 35 of 42.

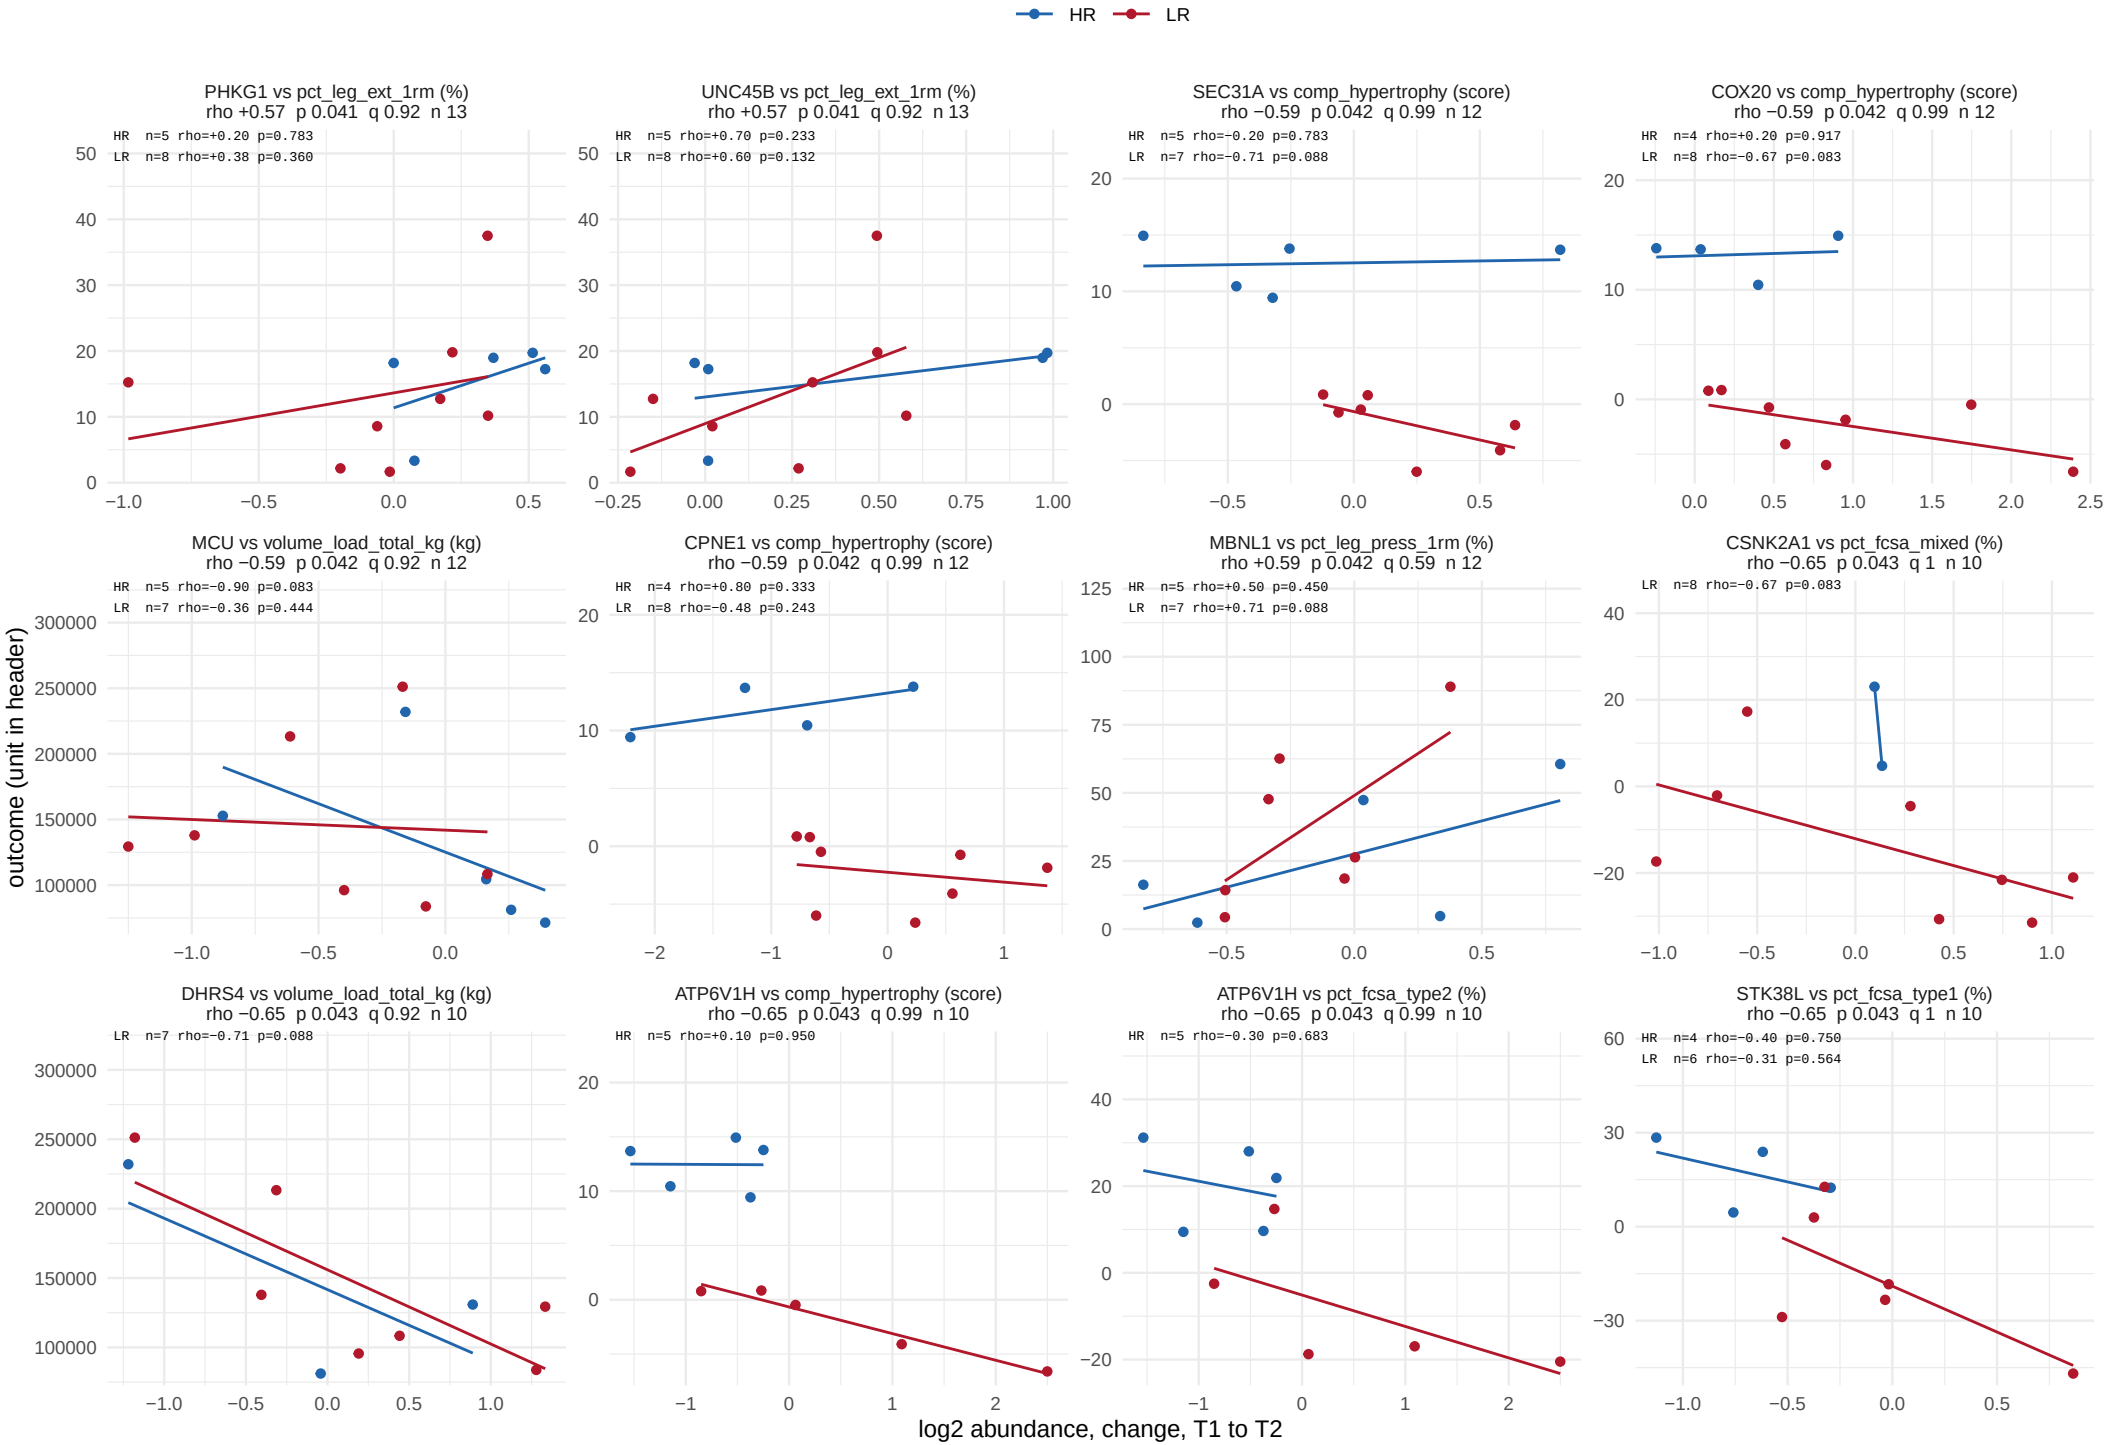

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


502 of 11286 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 36 of 42.

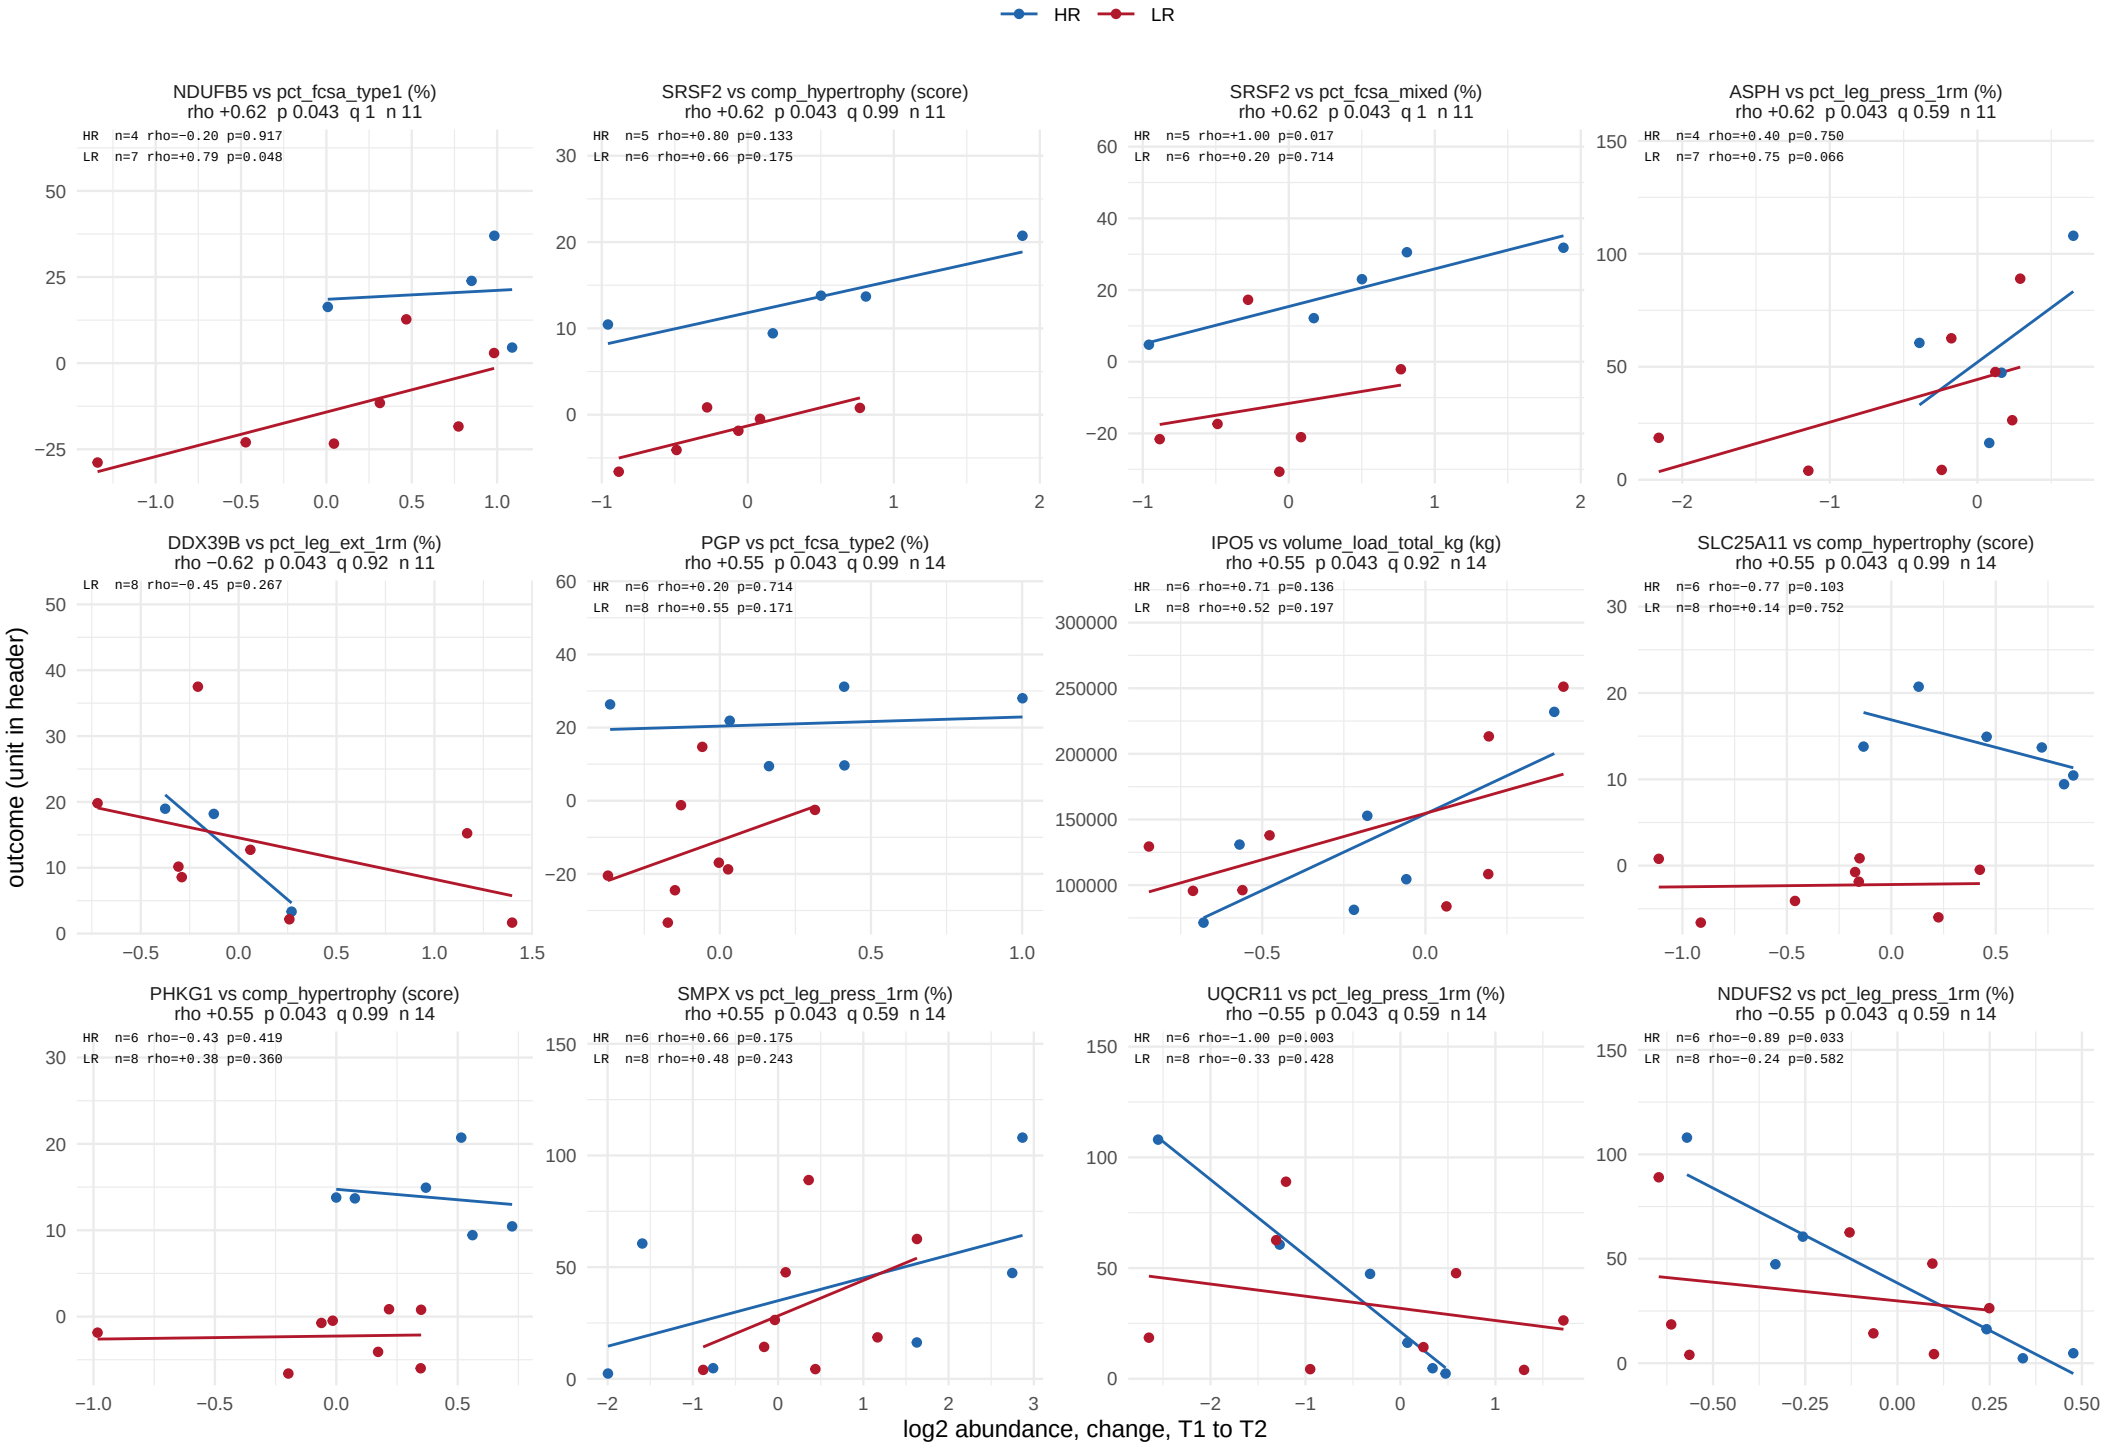

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


502 of 11286 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 37 of 42.

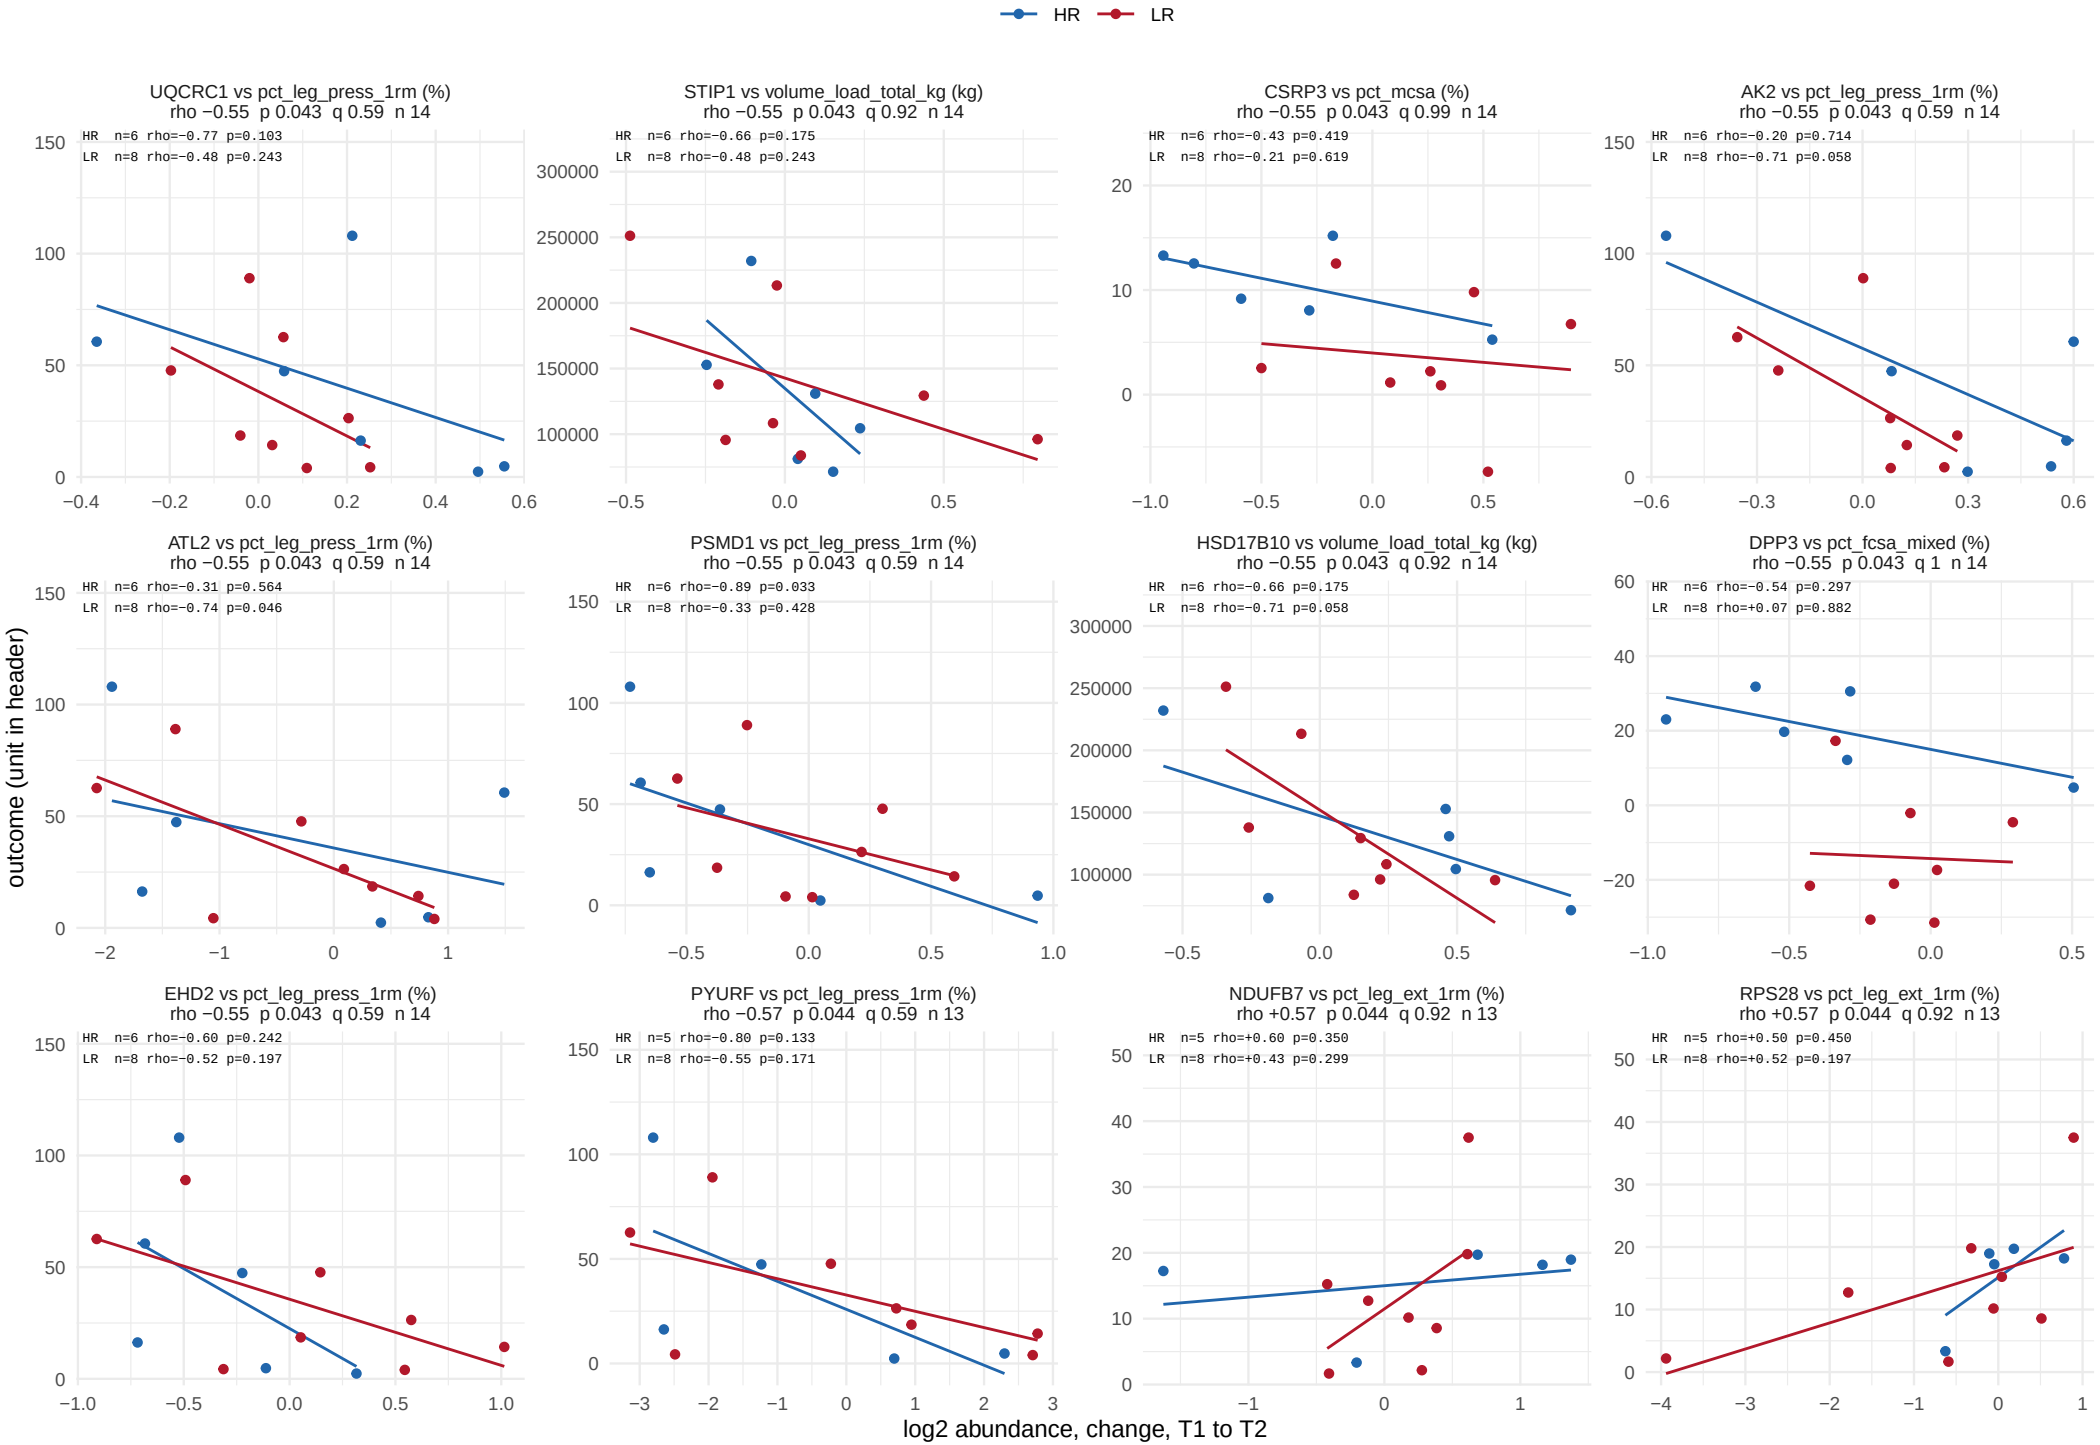

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


502 of 11286 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 38 of 42.

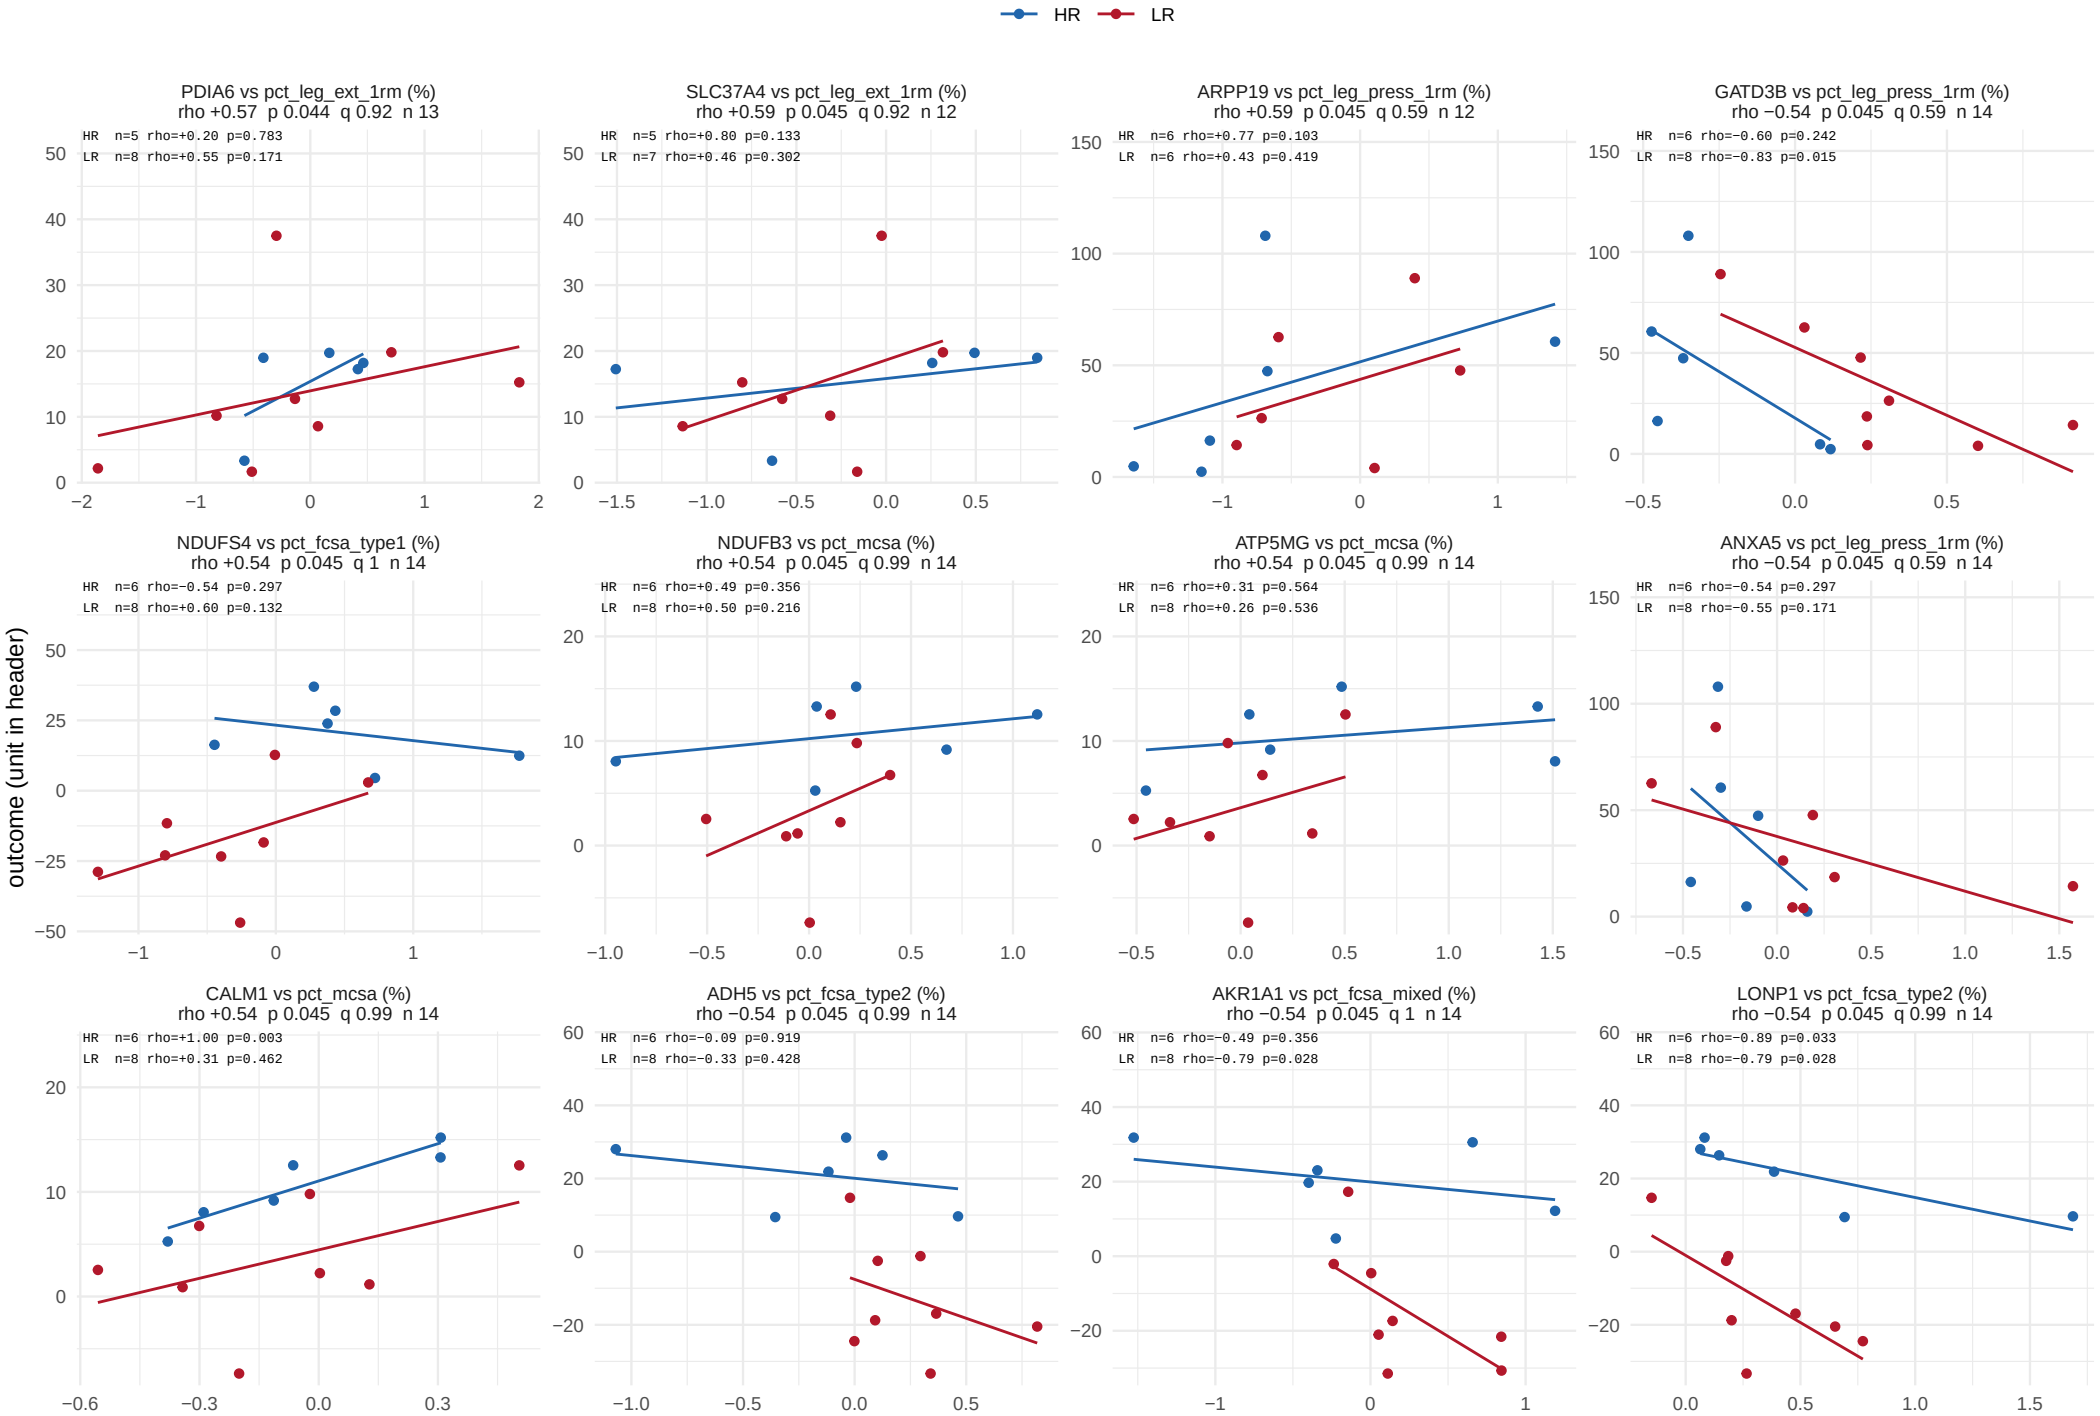

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


502 of 11286 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 39 of 42.

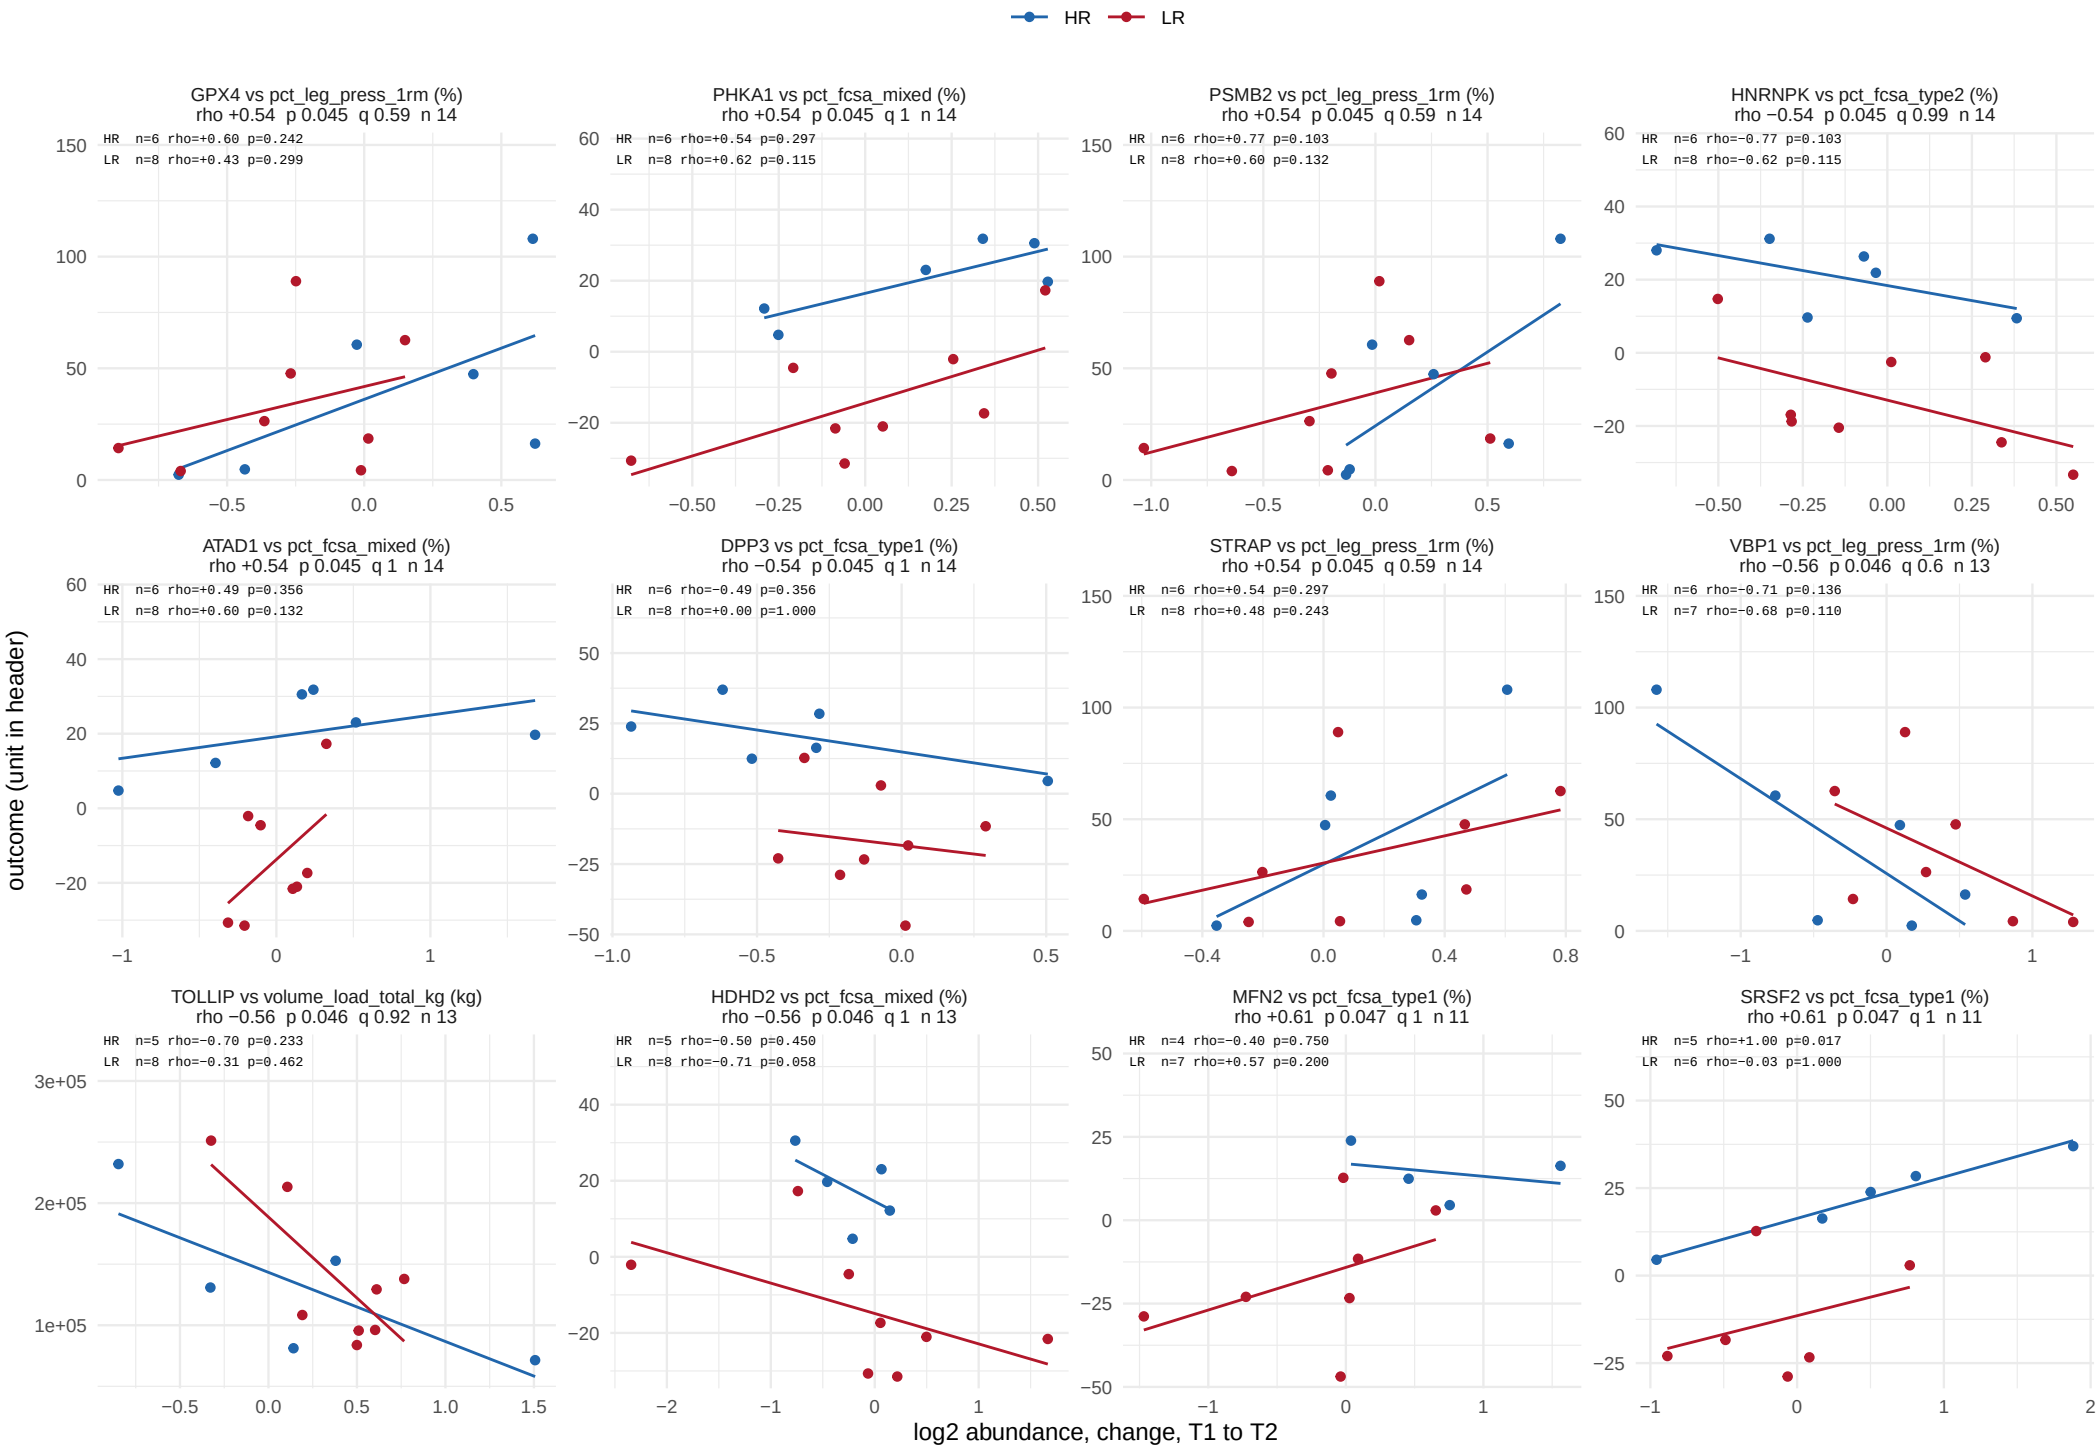

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


502 of 11286 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 40 of 42.

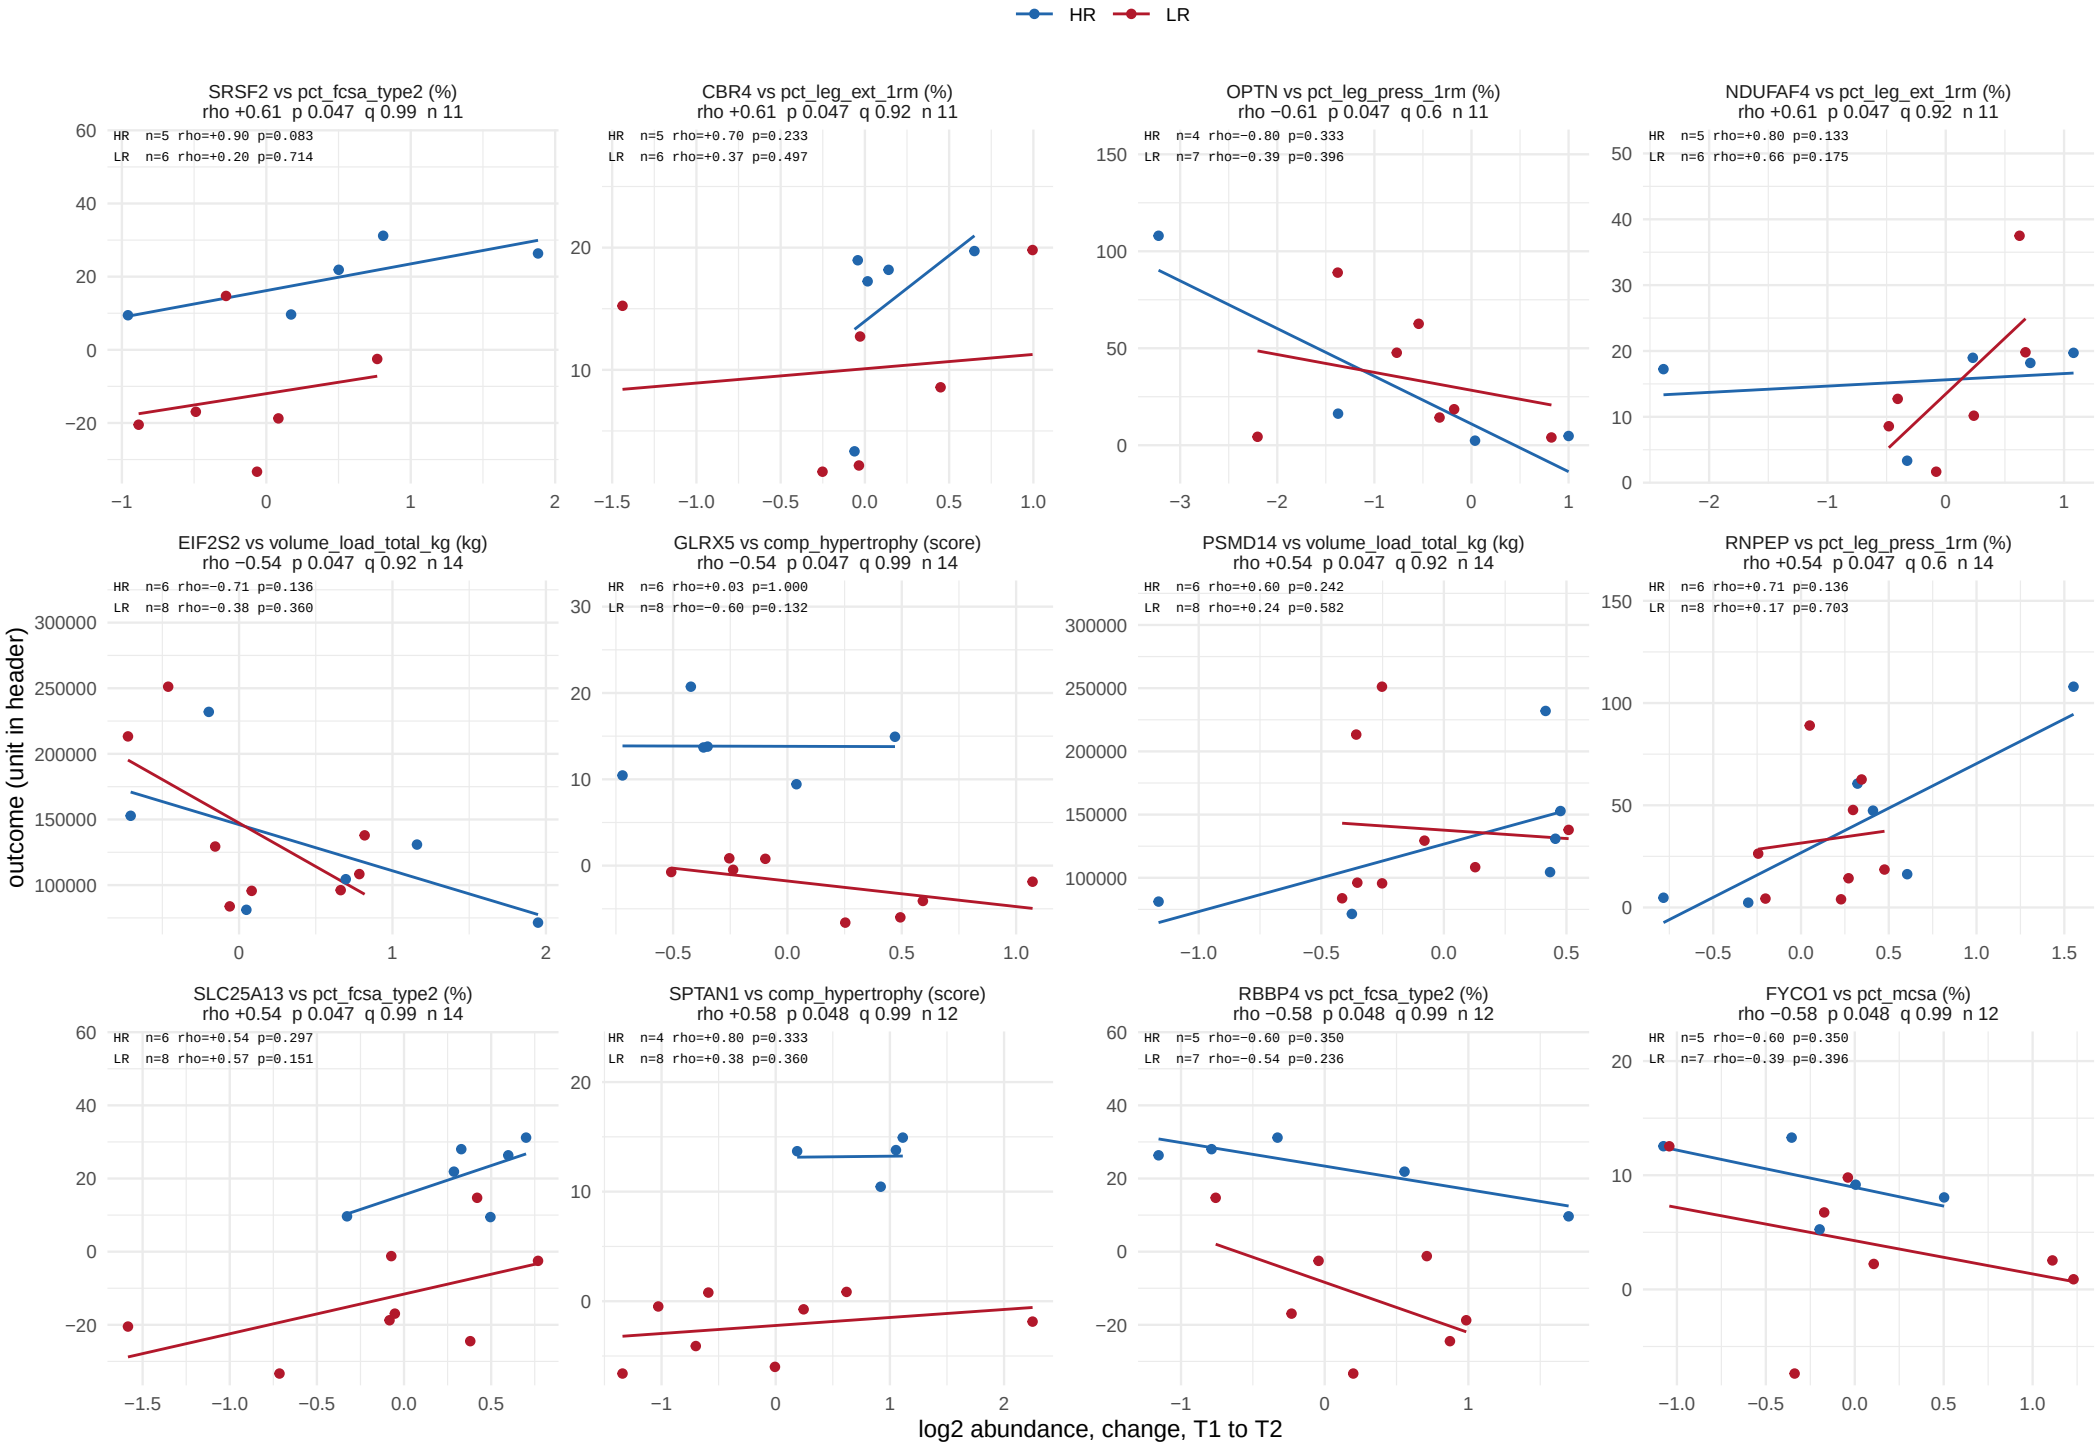

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


502 of 11286 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 41 of 42.

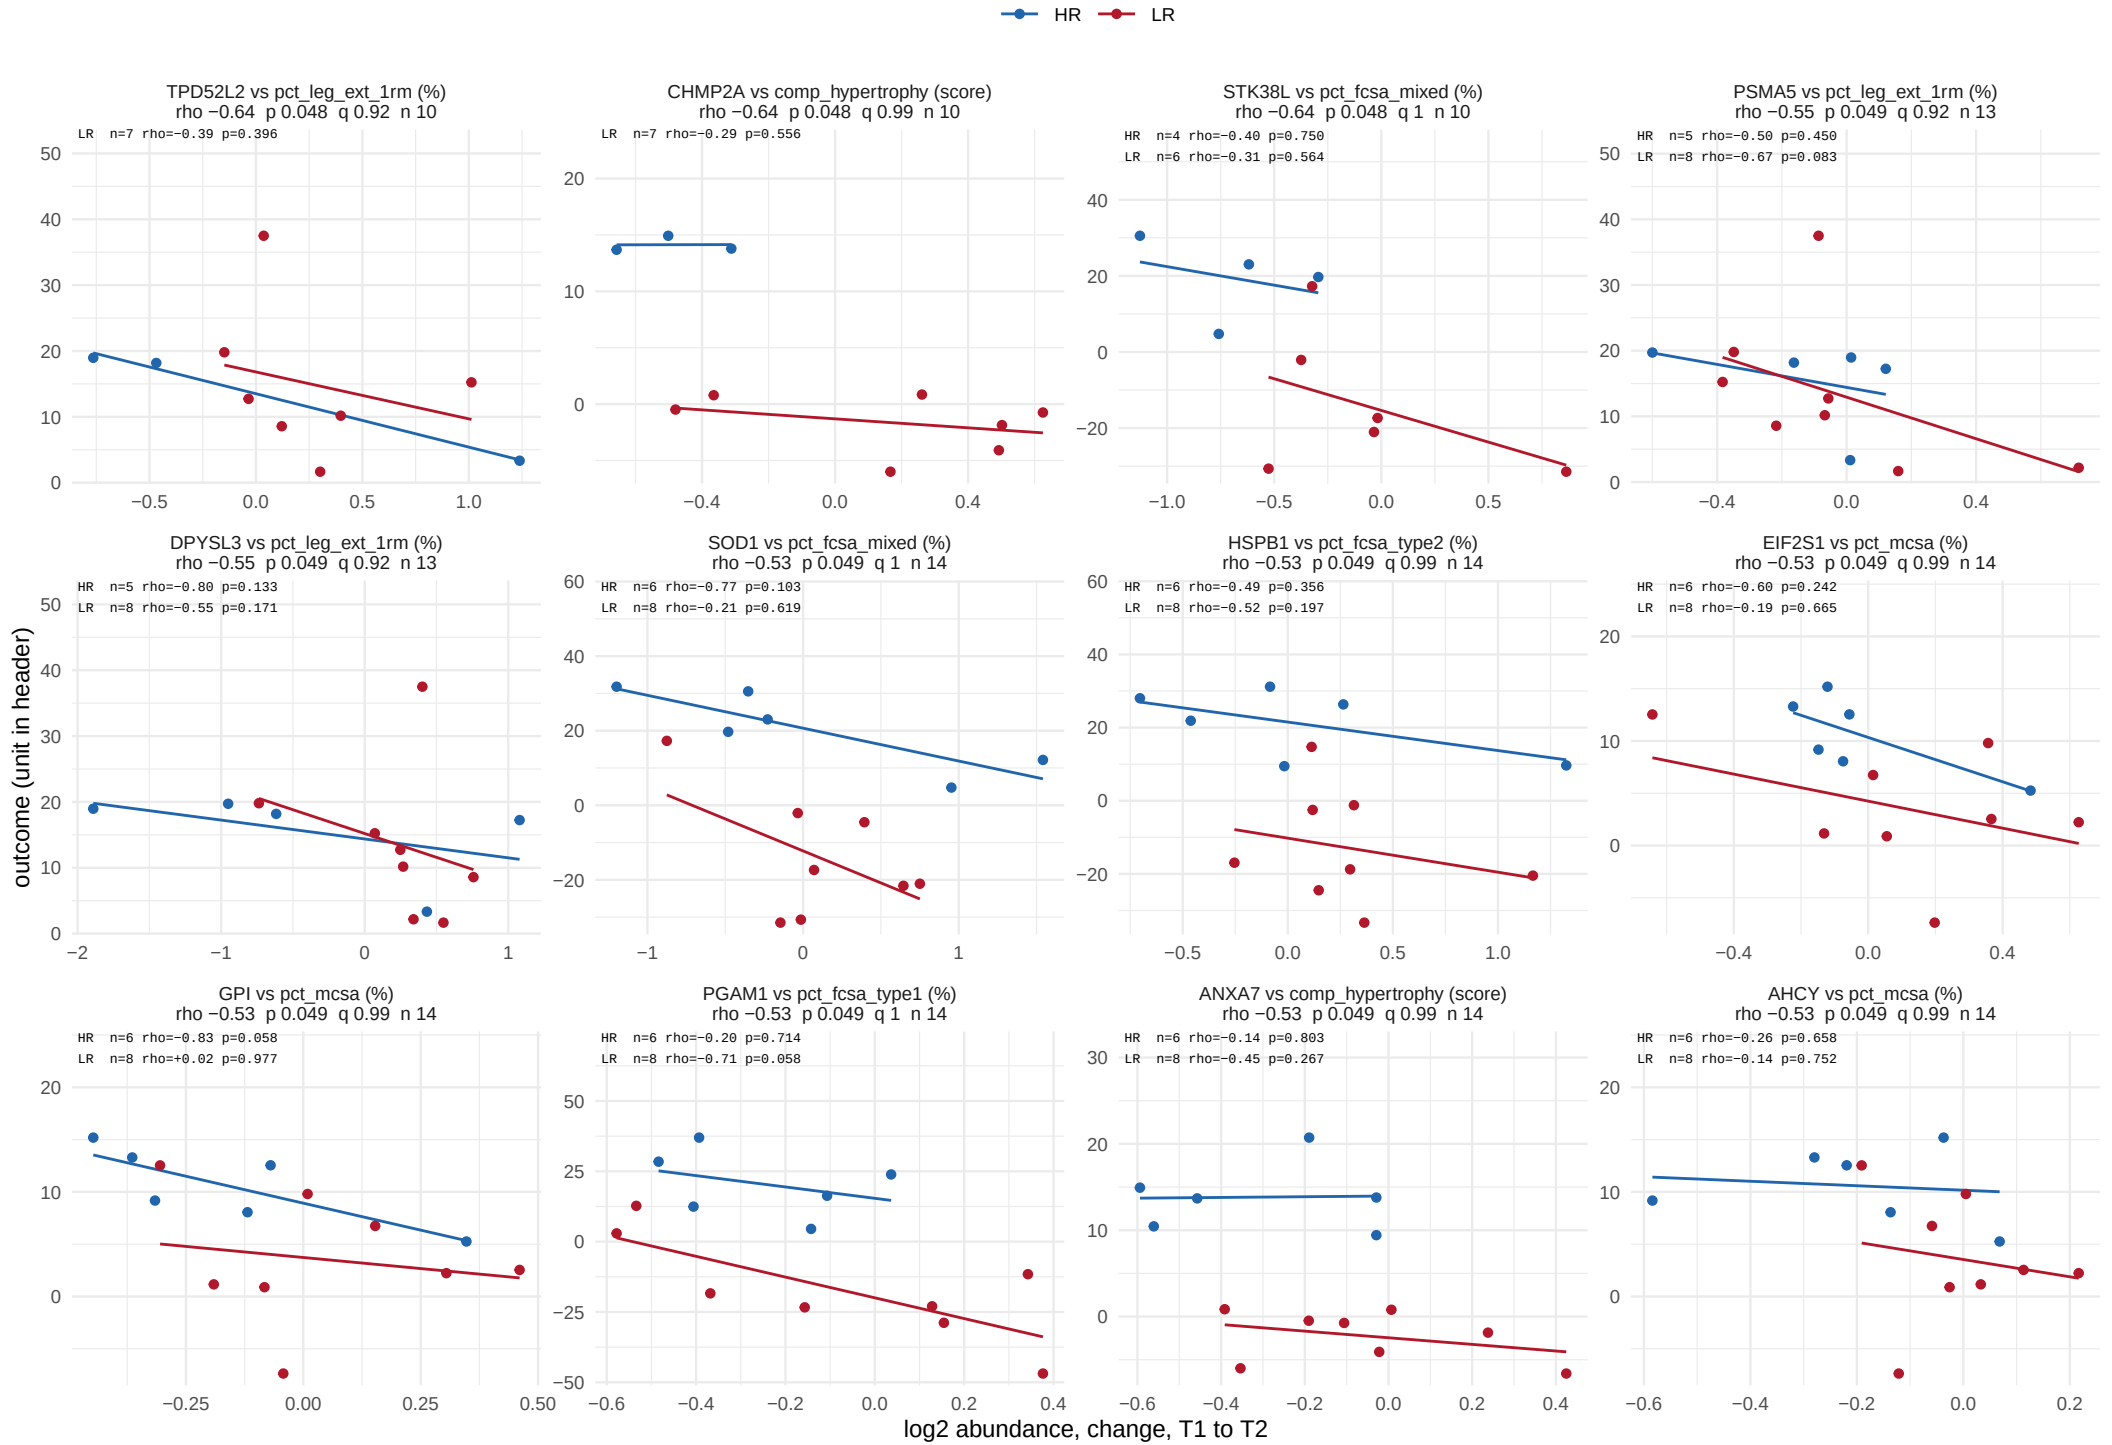

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


502 of 11286 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 42 of 42.

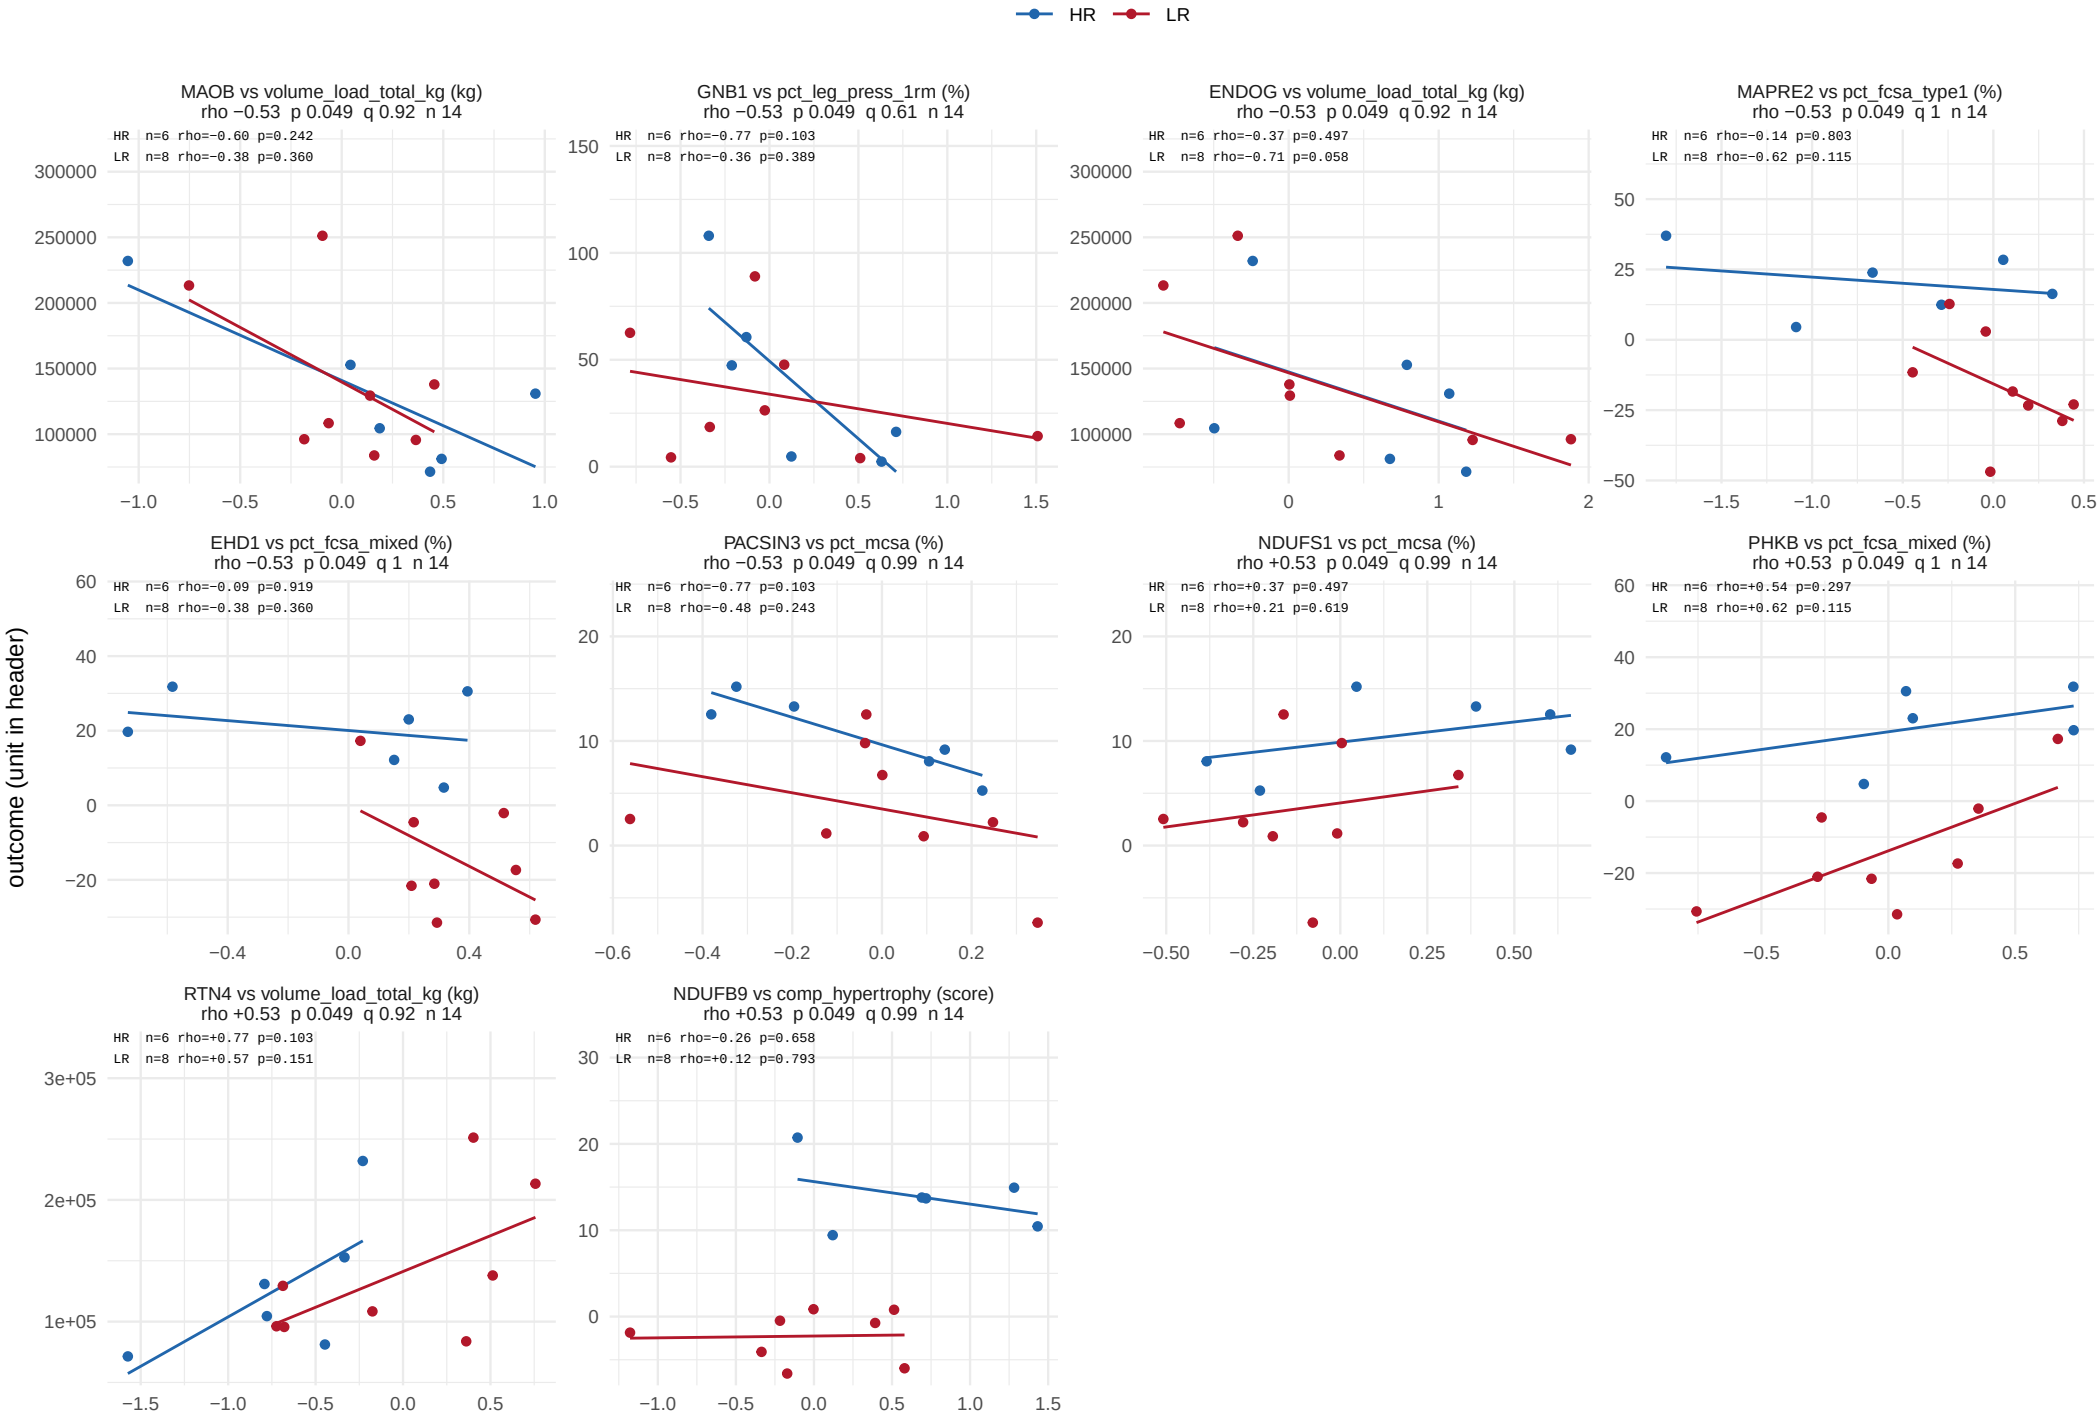

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


673 of 12553 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 1 of 57.

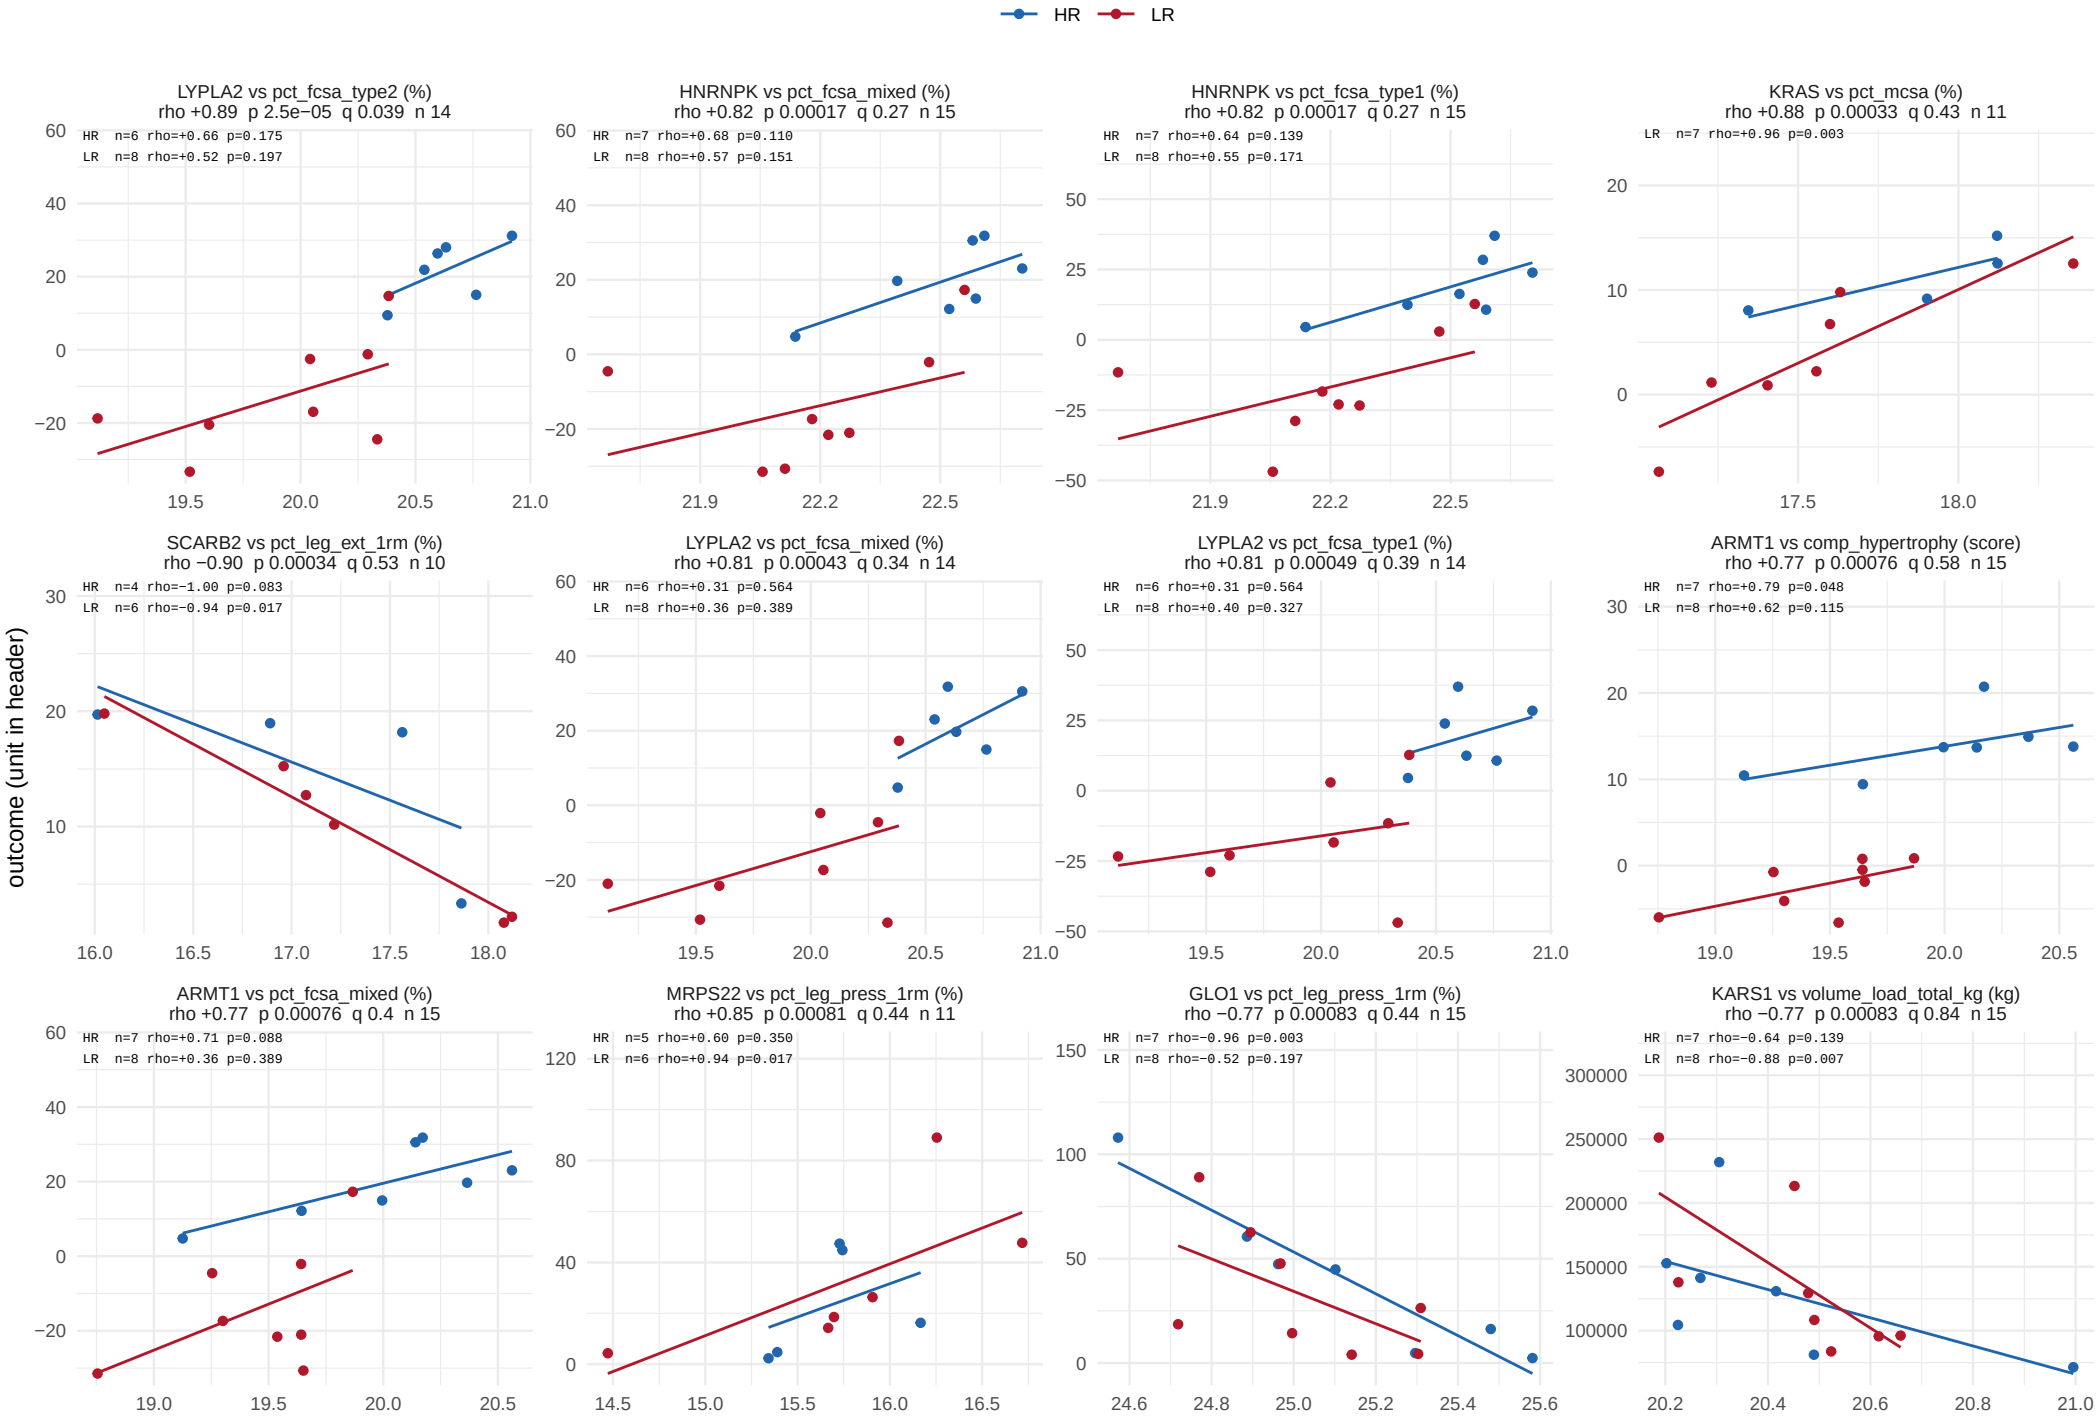

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


673 of 12553 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 2 of 57.

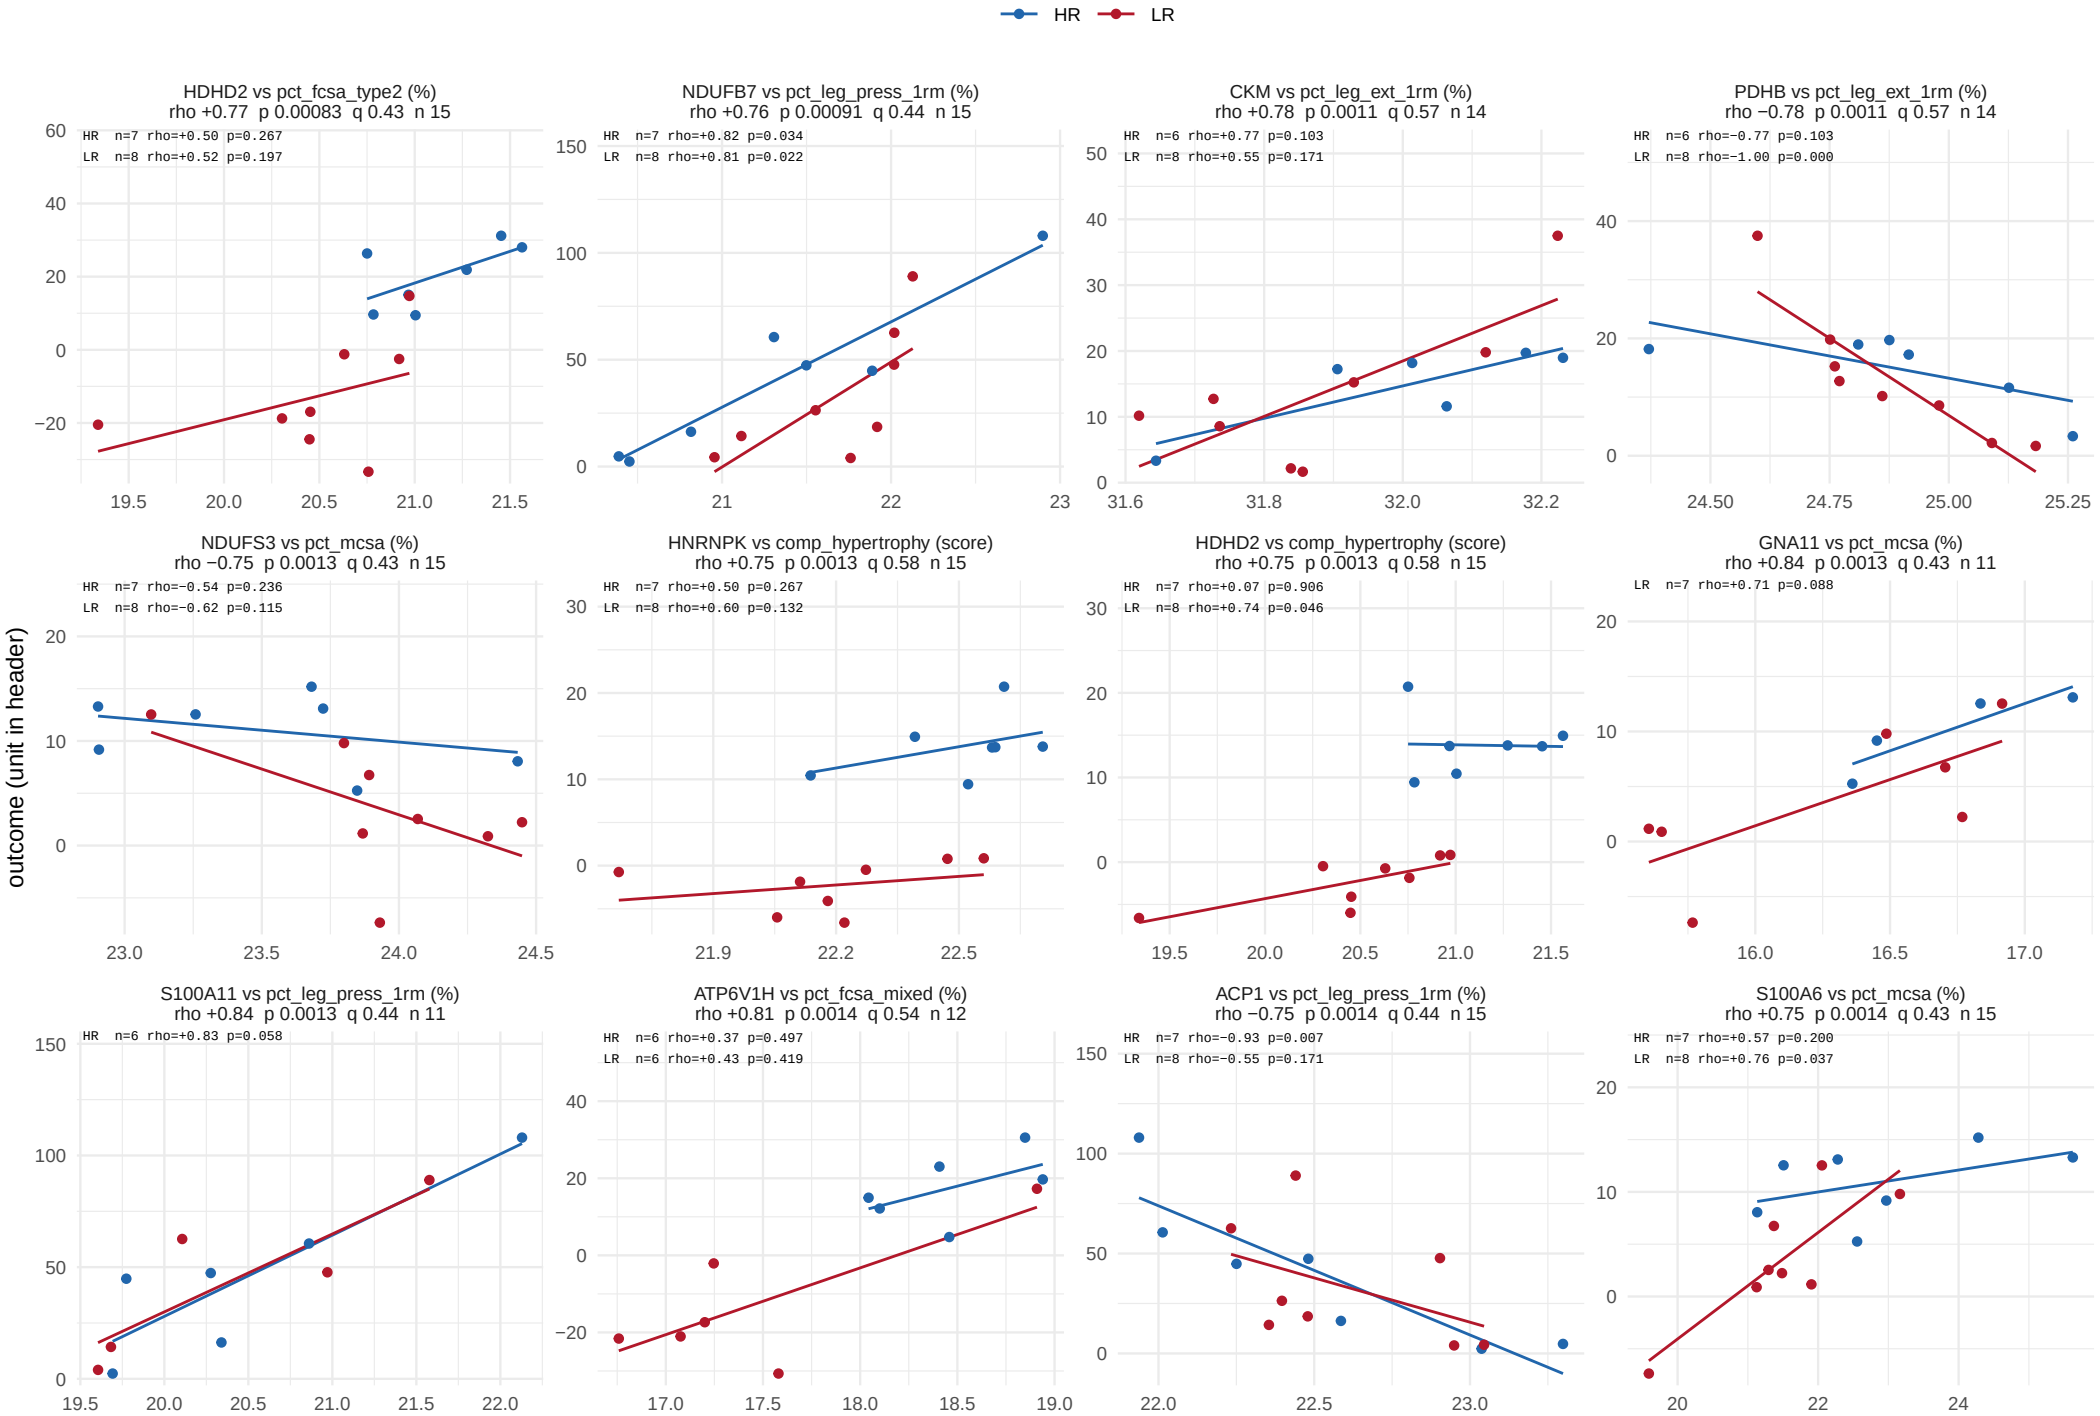

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


673 of 12553 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 3 of 57.

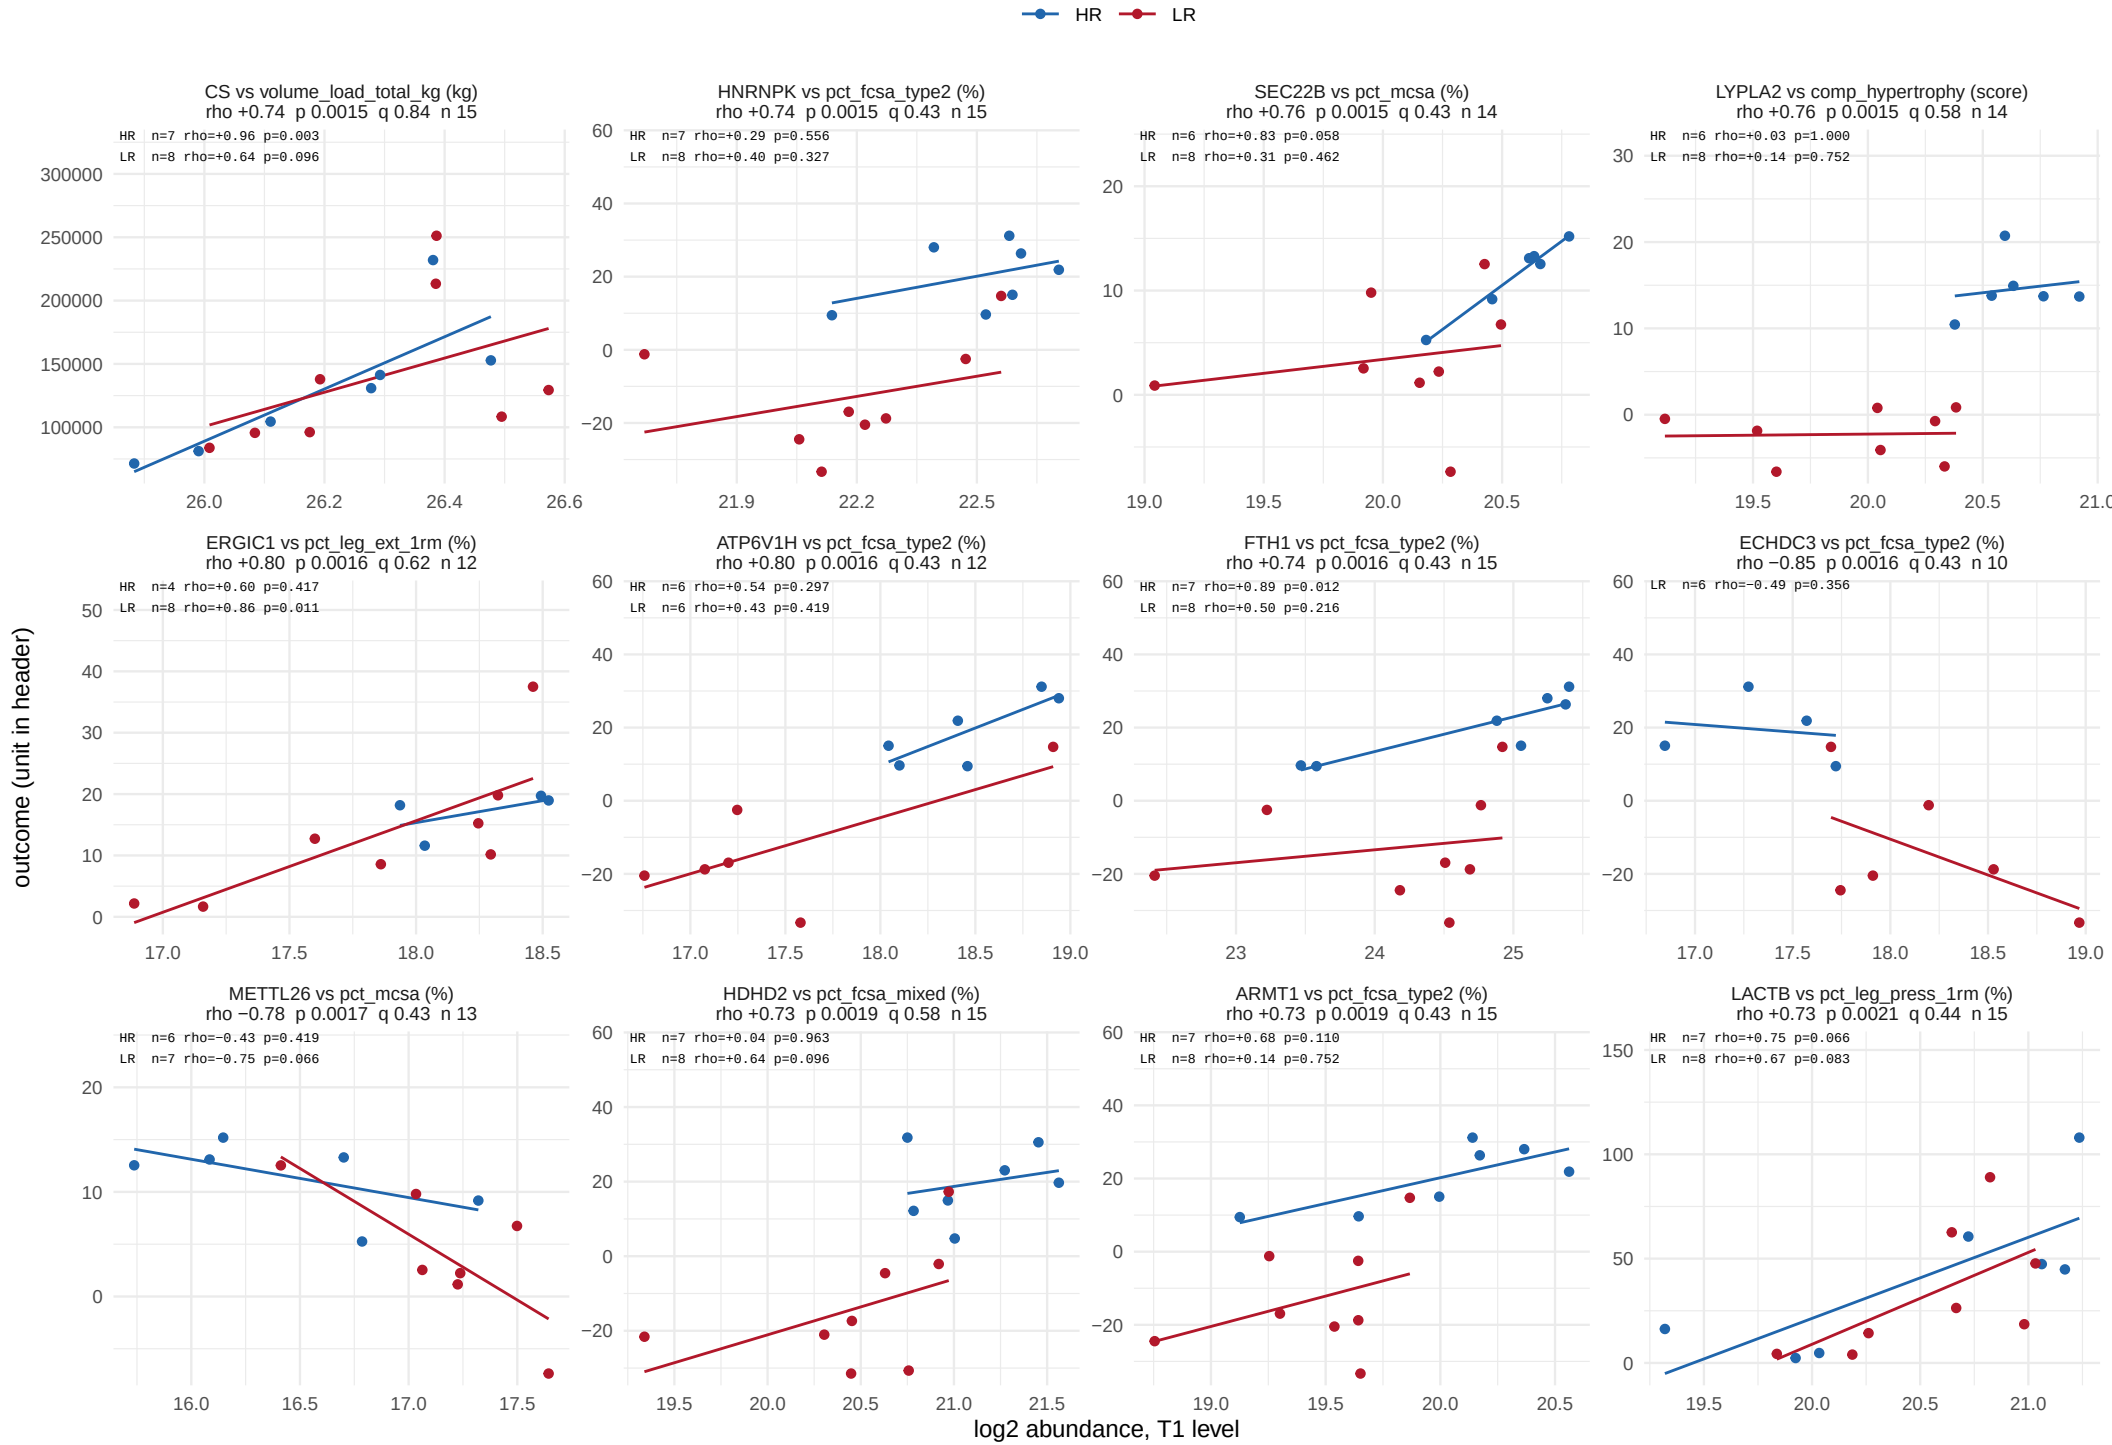

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


673 of 12553 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 4 of 57.

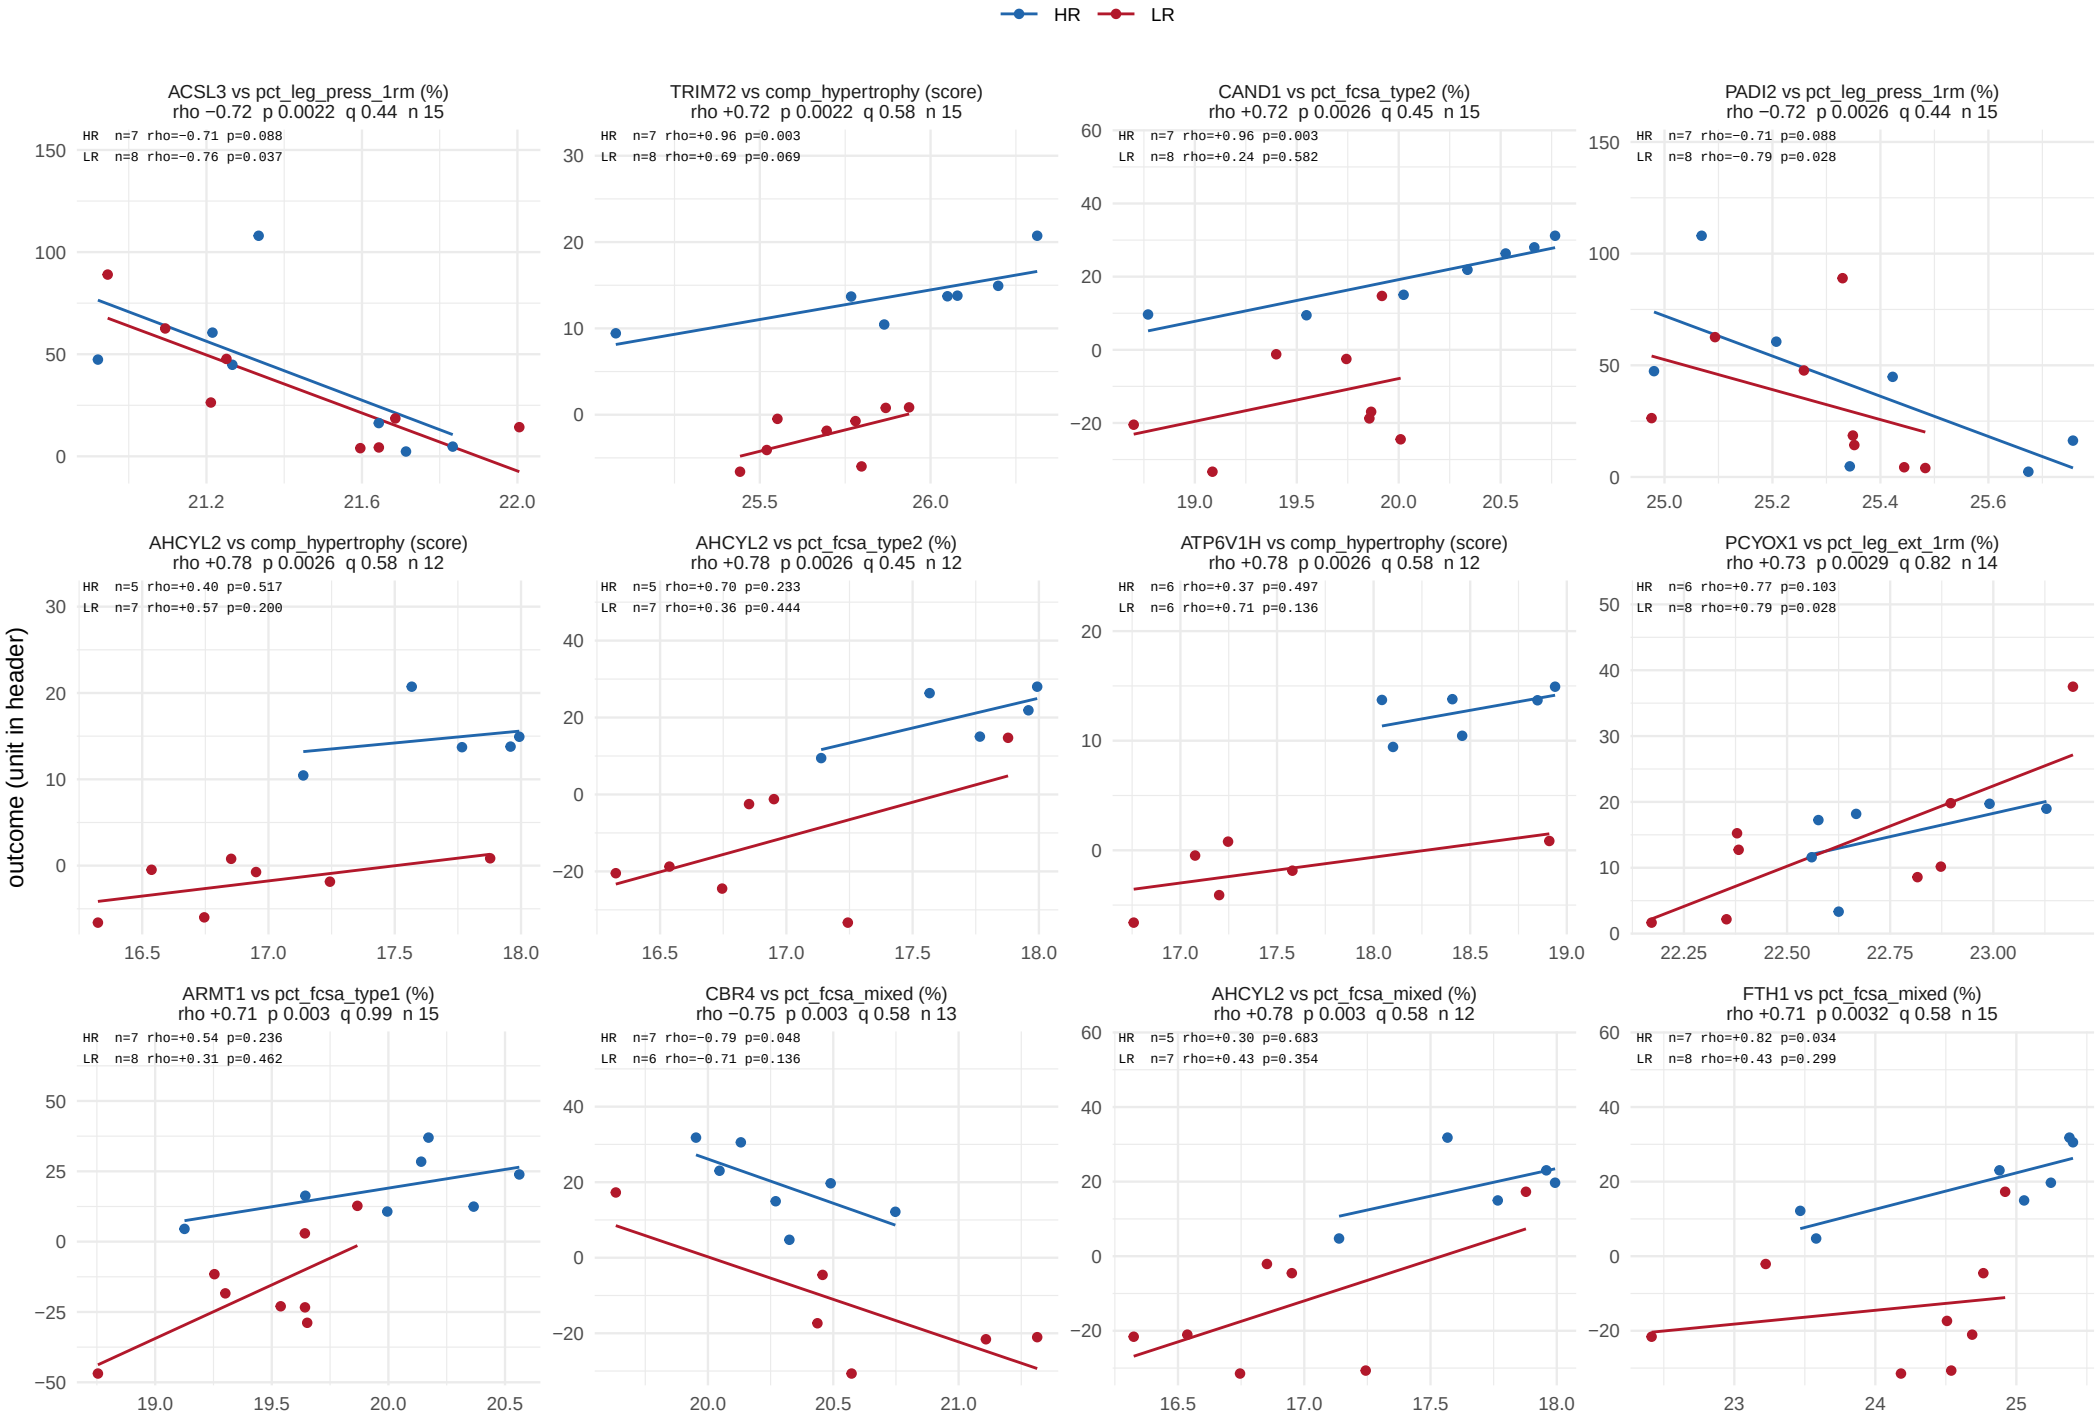

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


673 of 12553 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 5 of 57.

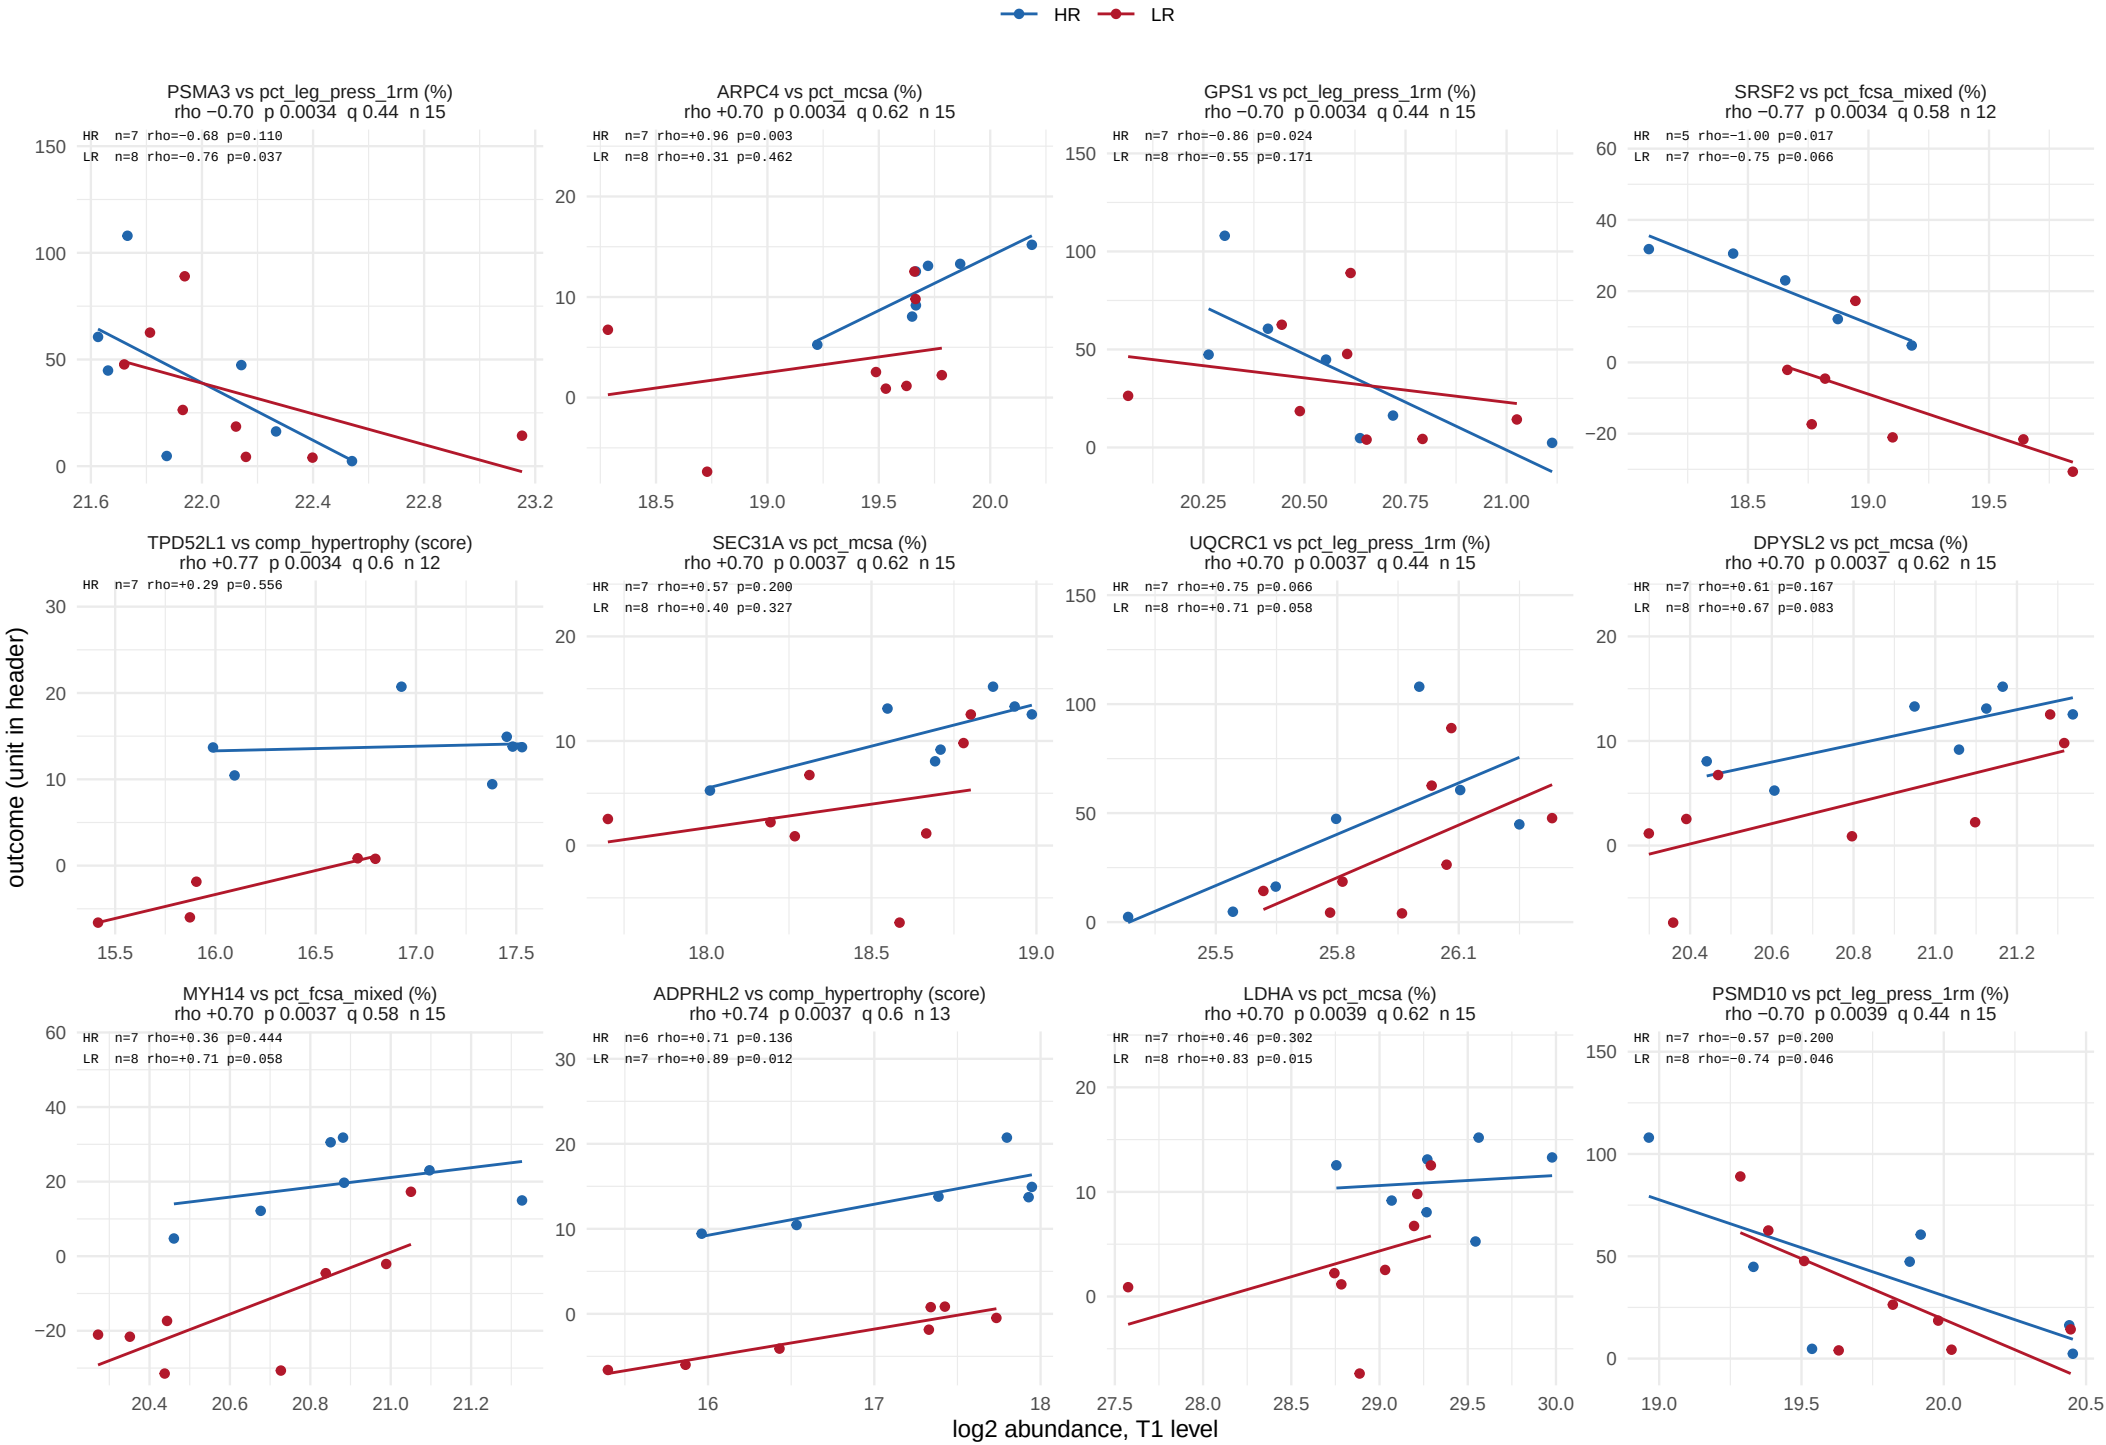

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


673 of 12553 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 6 of 57.

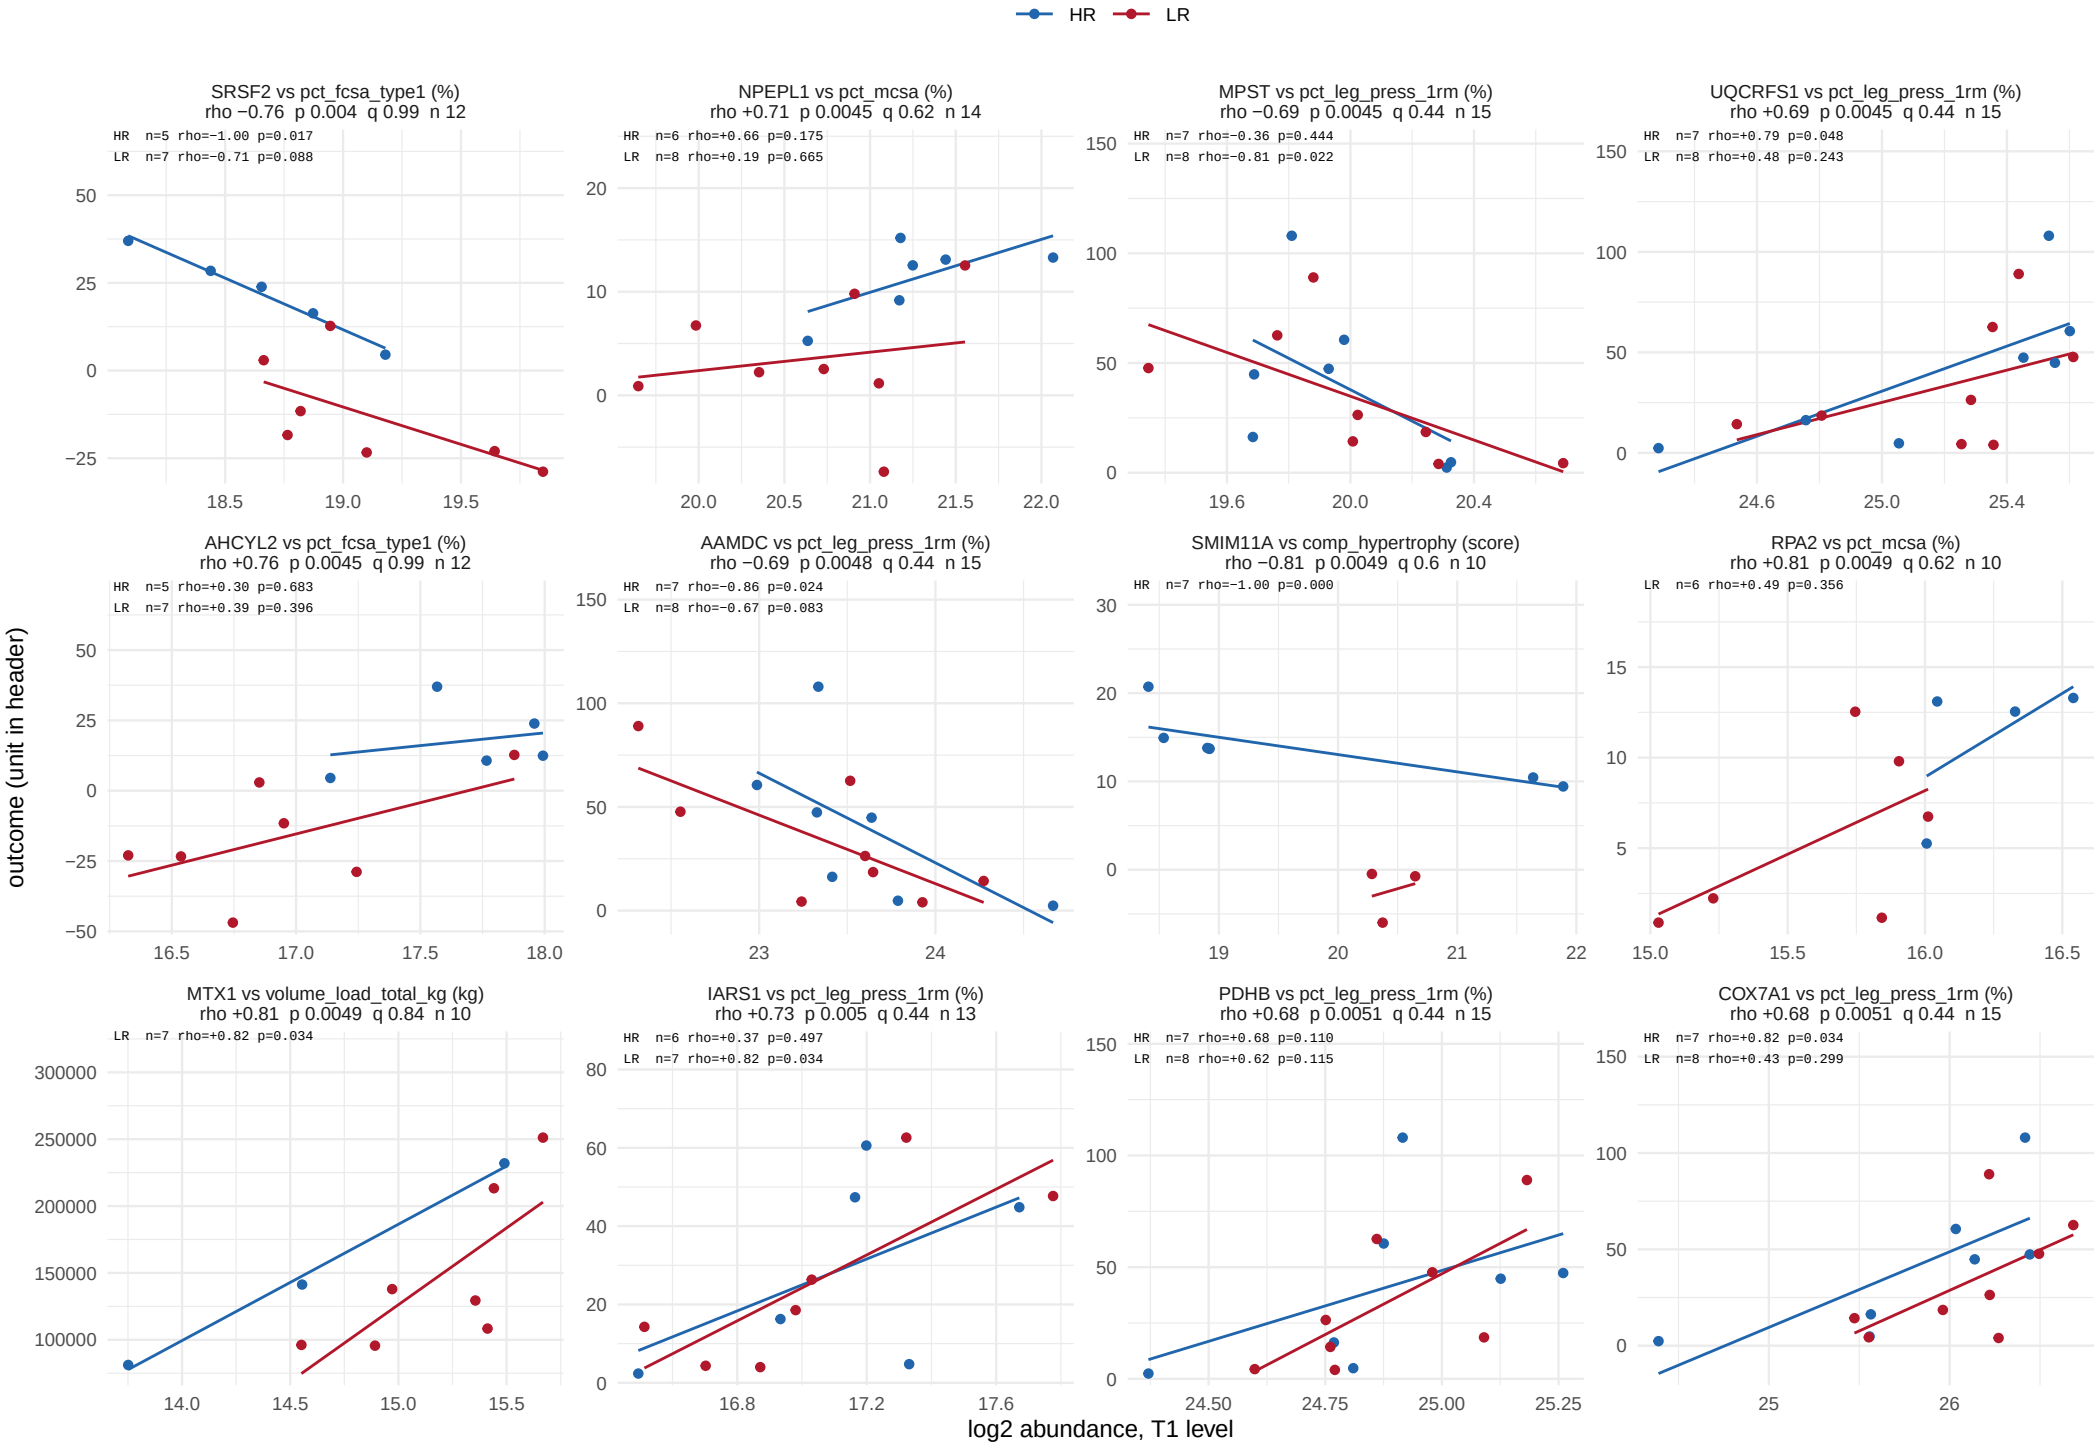

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


673 of 12553 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 7 of 57.

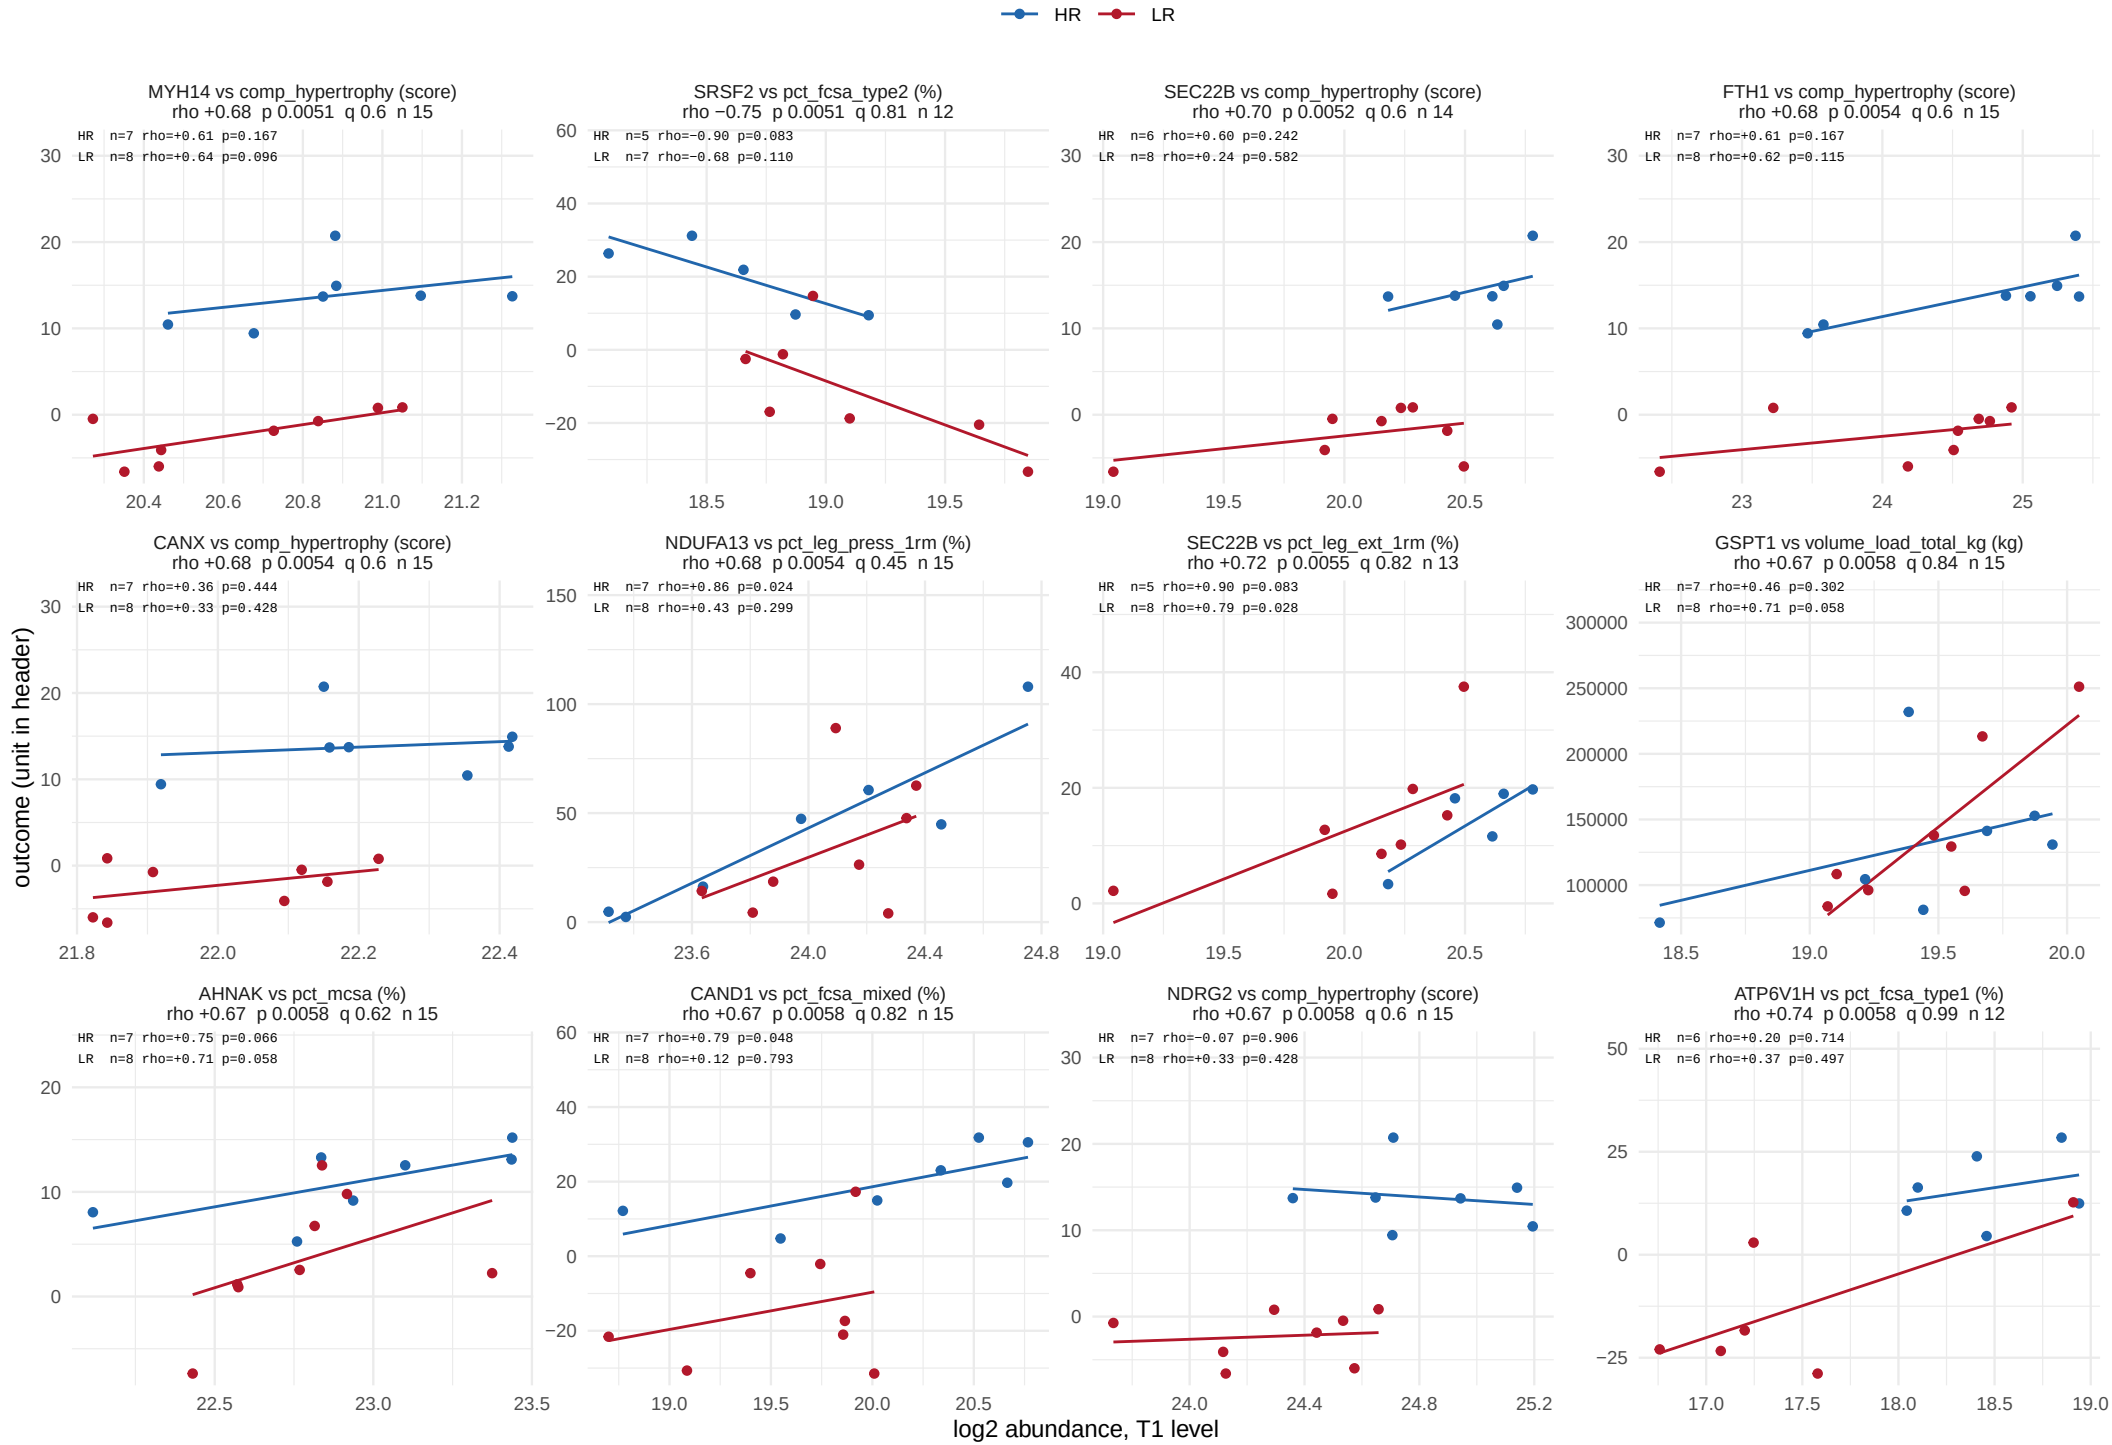

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


673 of 12553 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 8 of 57.

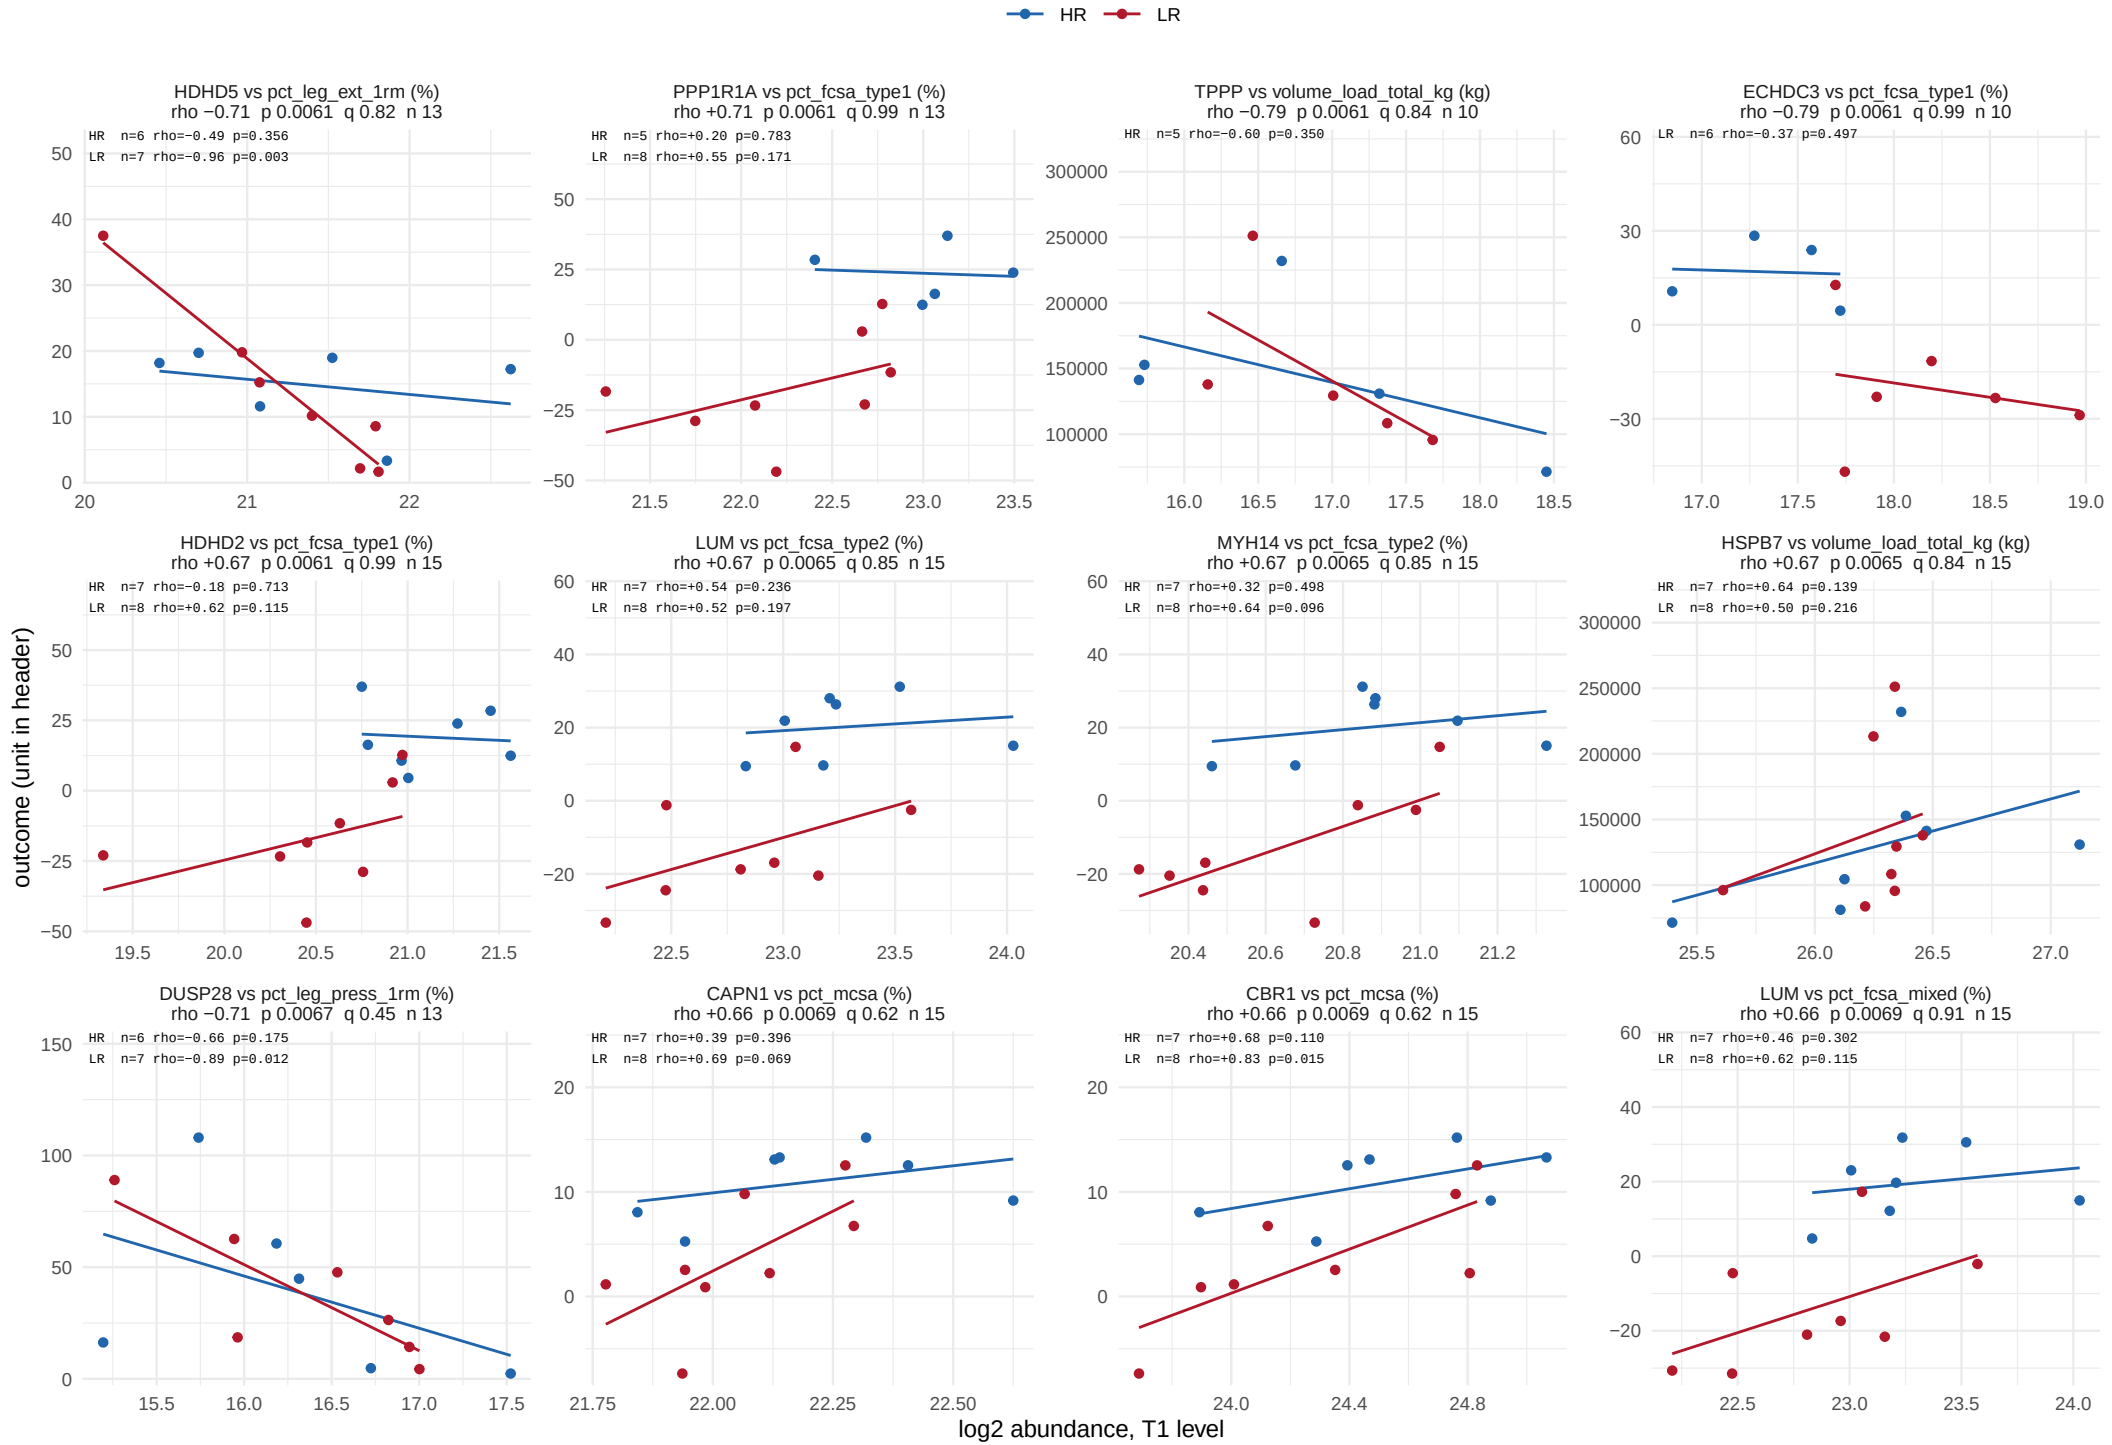

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


673 of 12553 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 9 of 57.

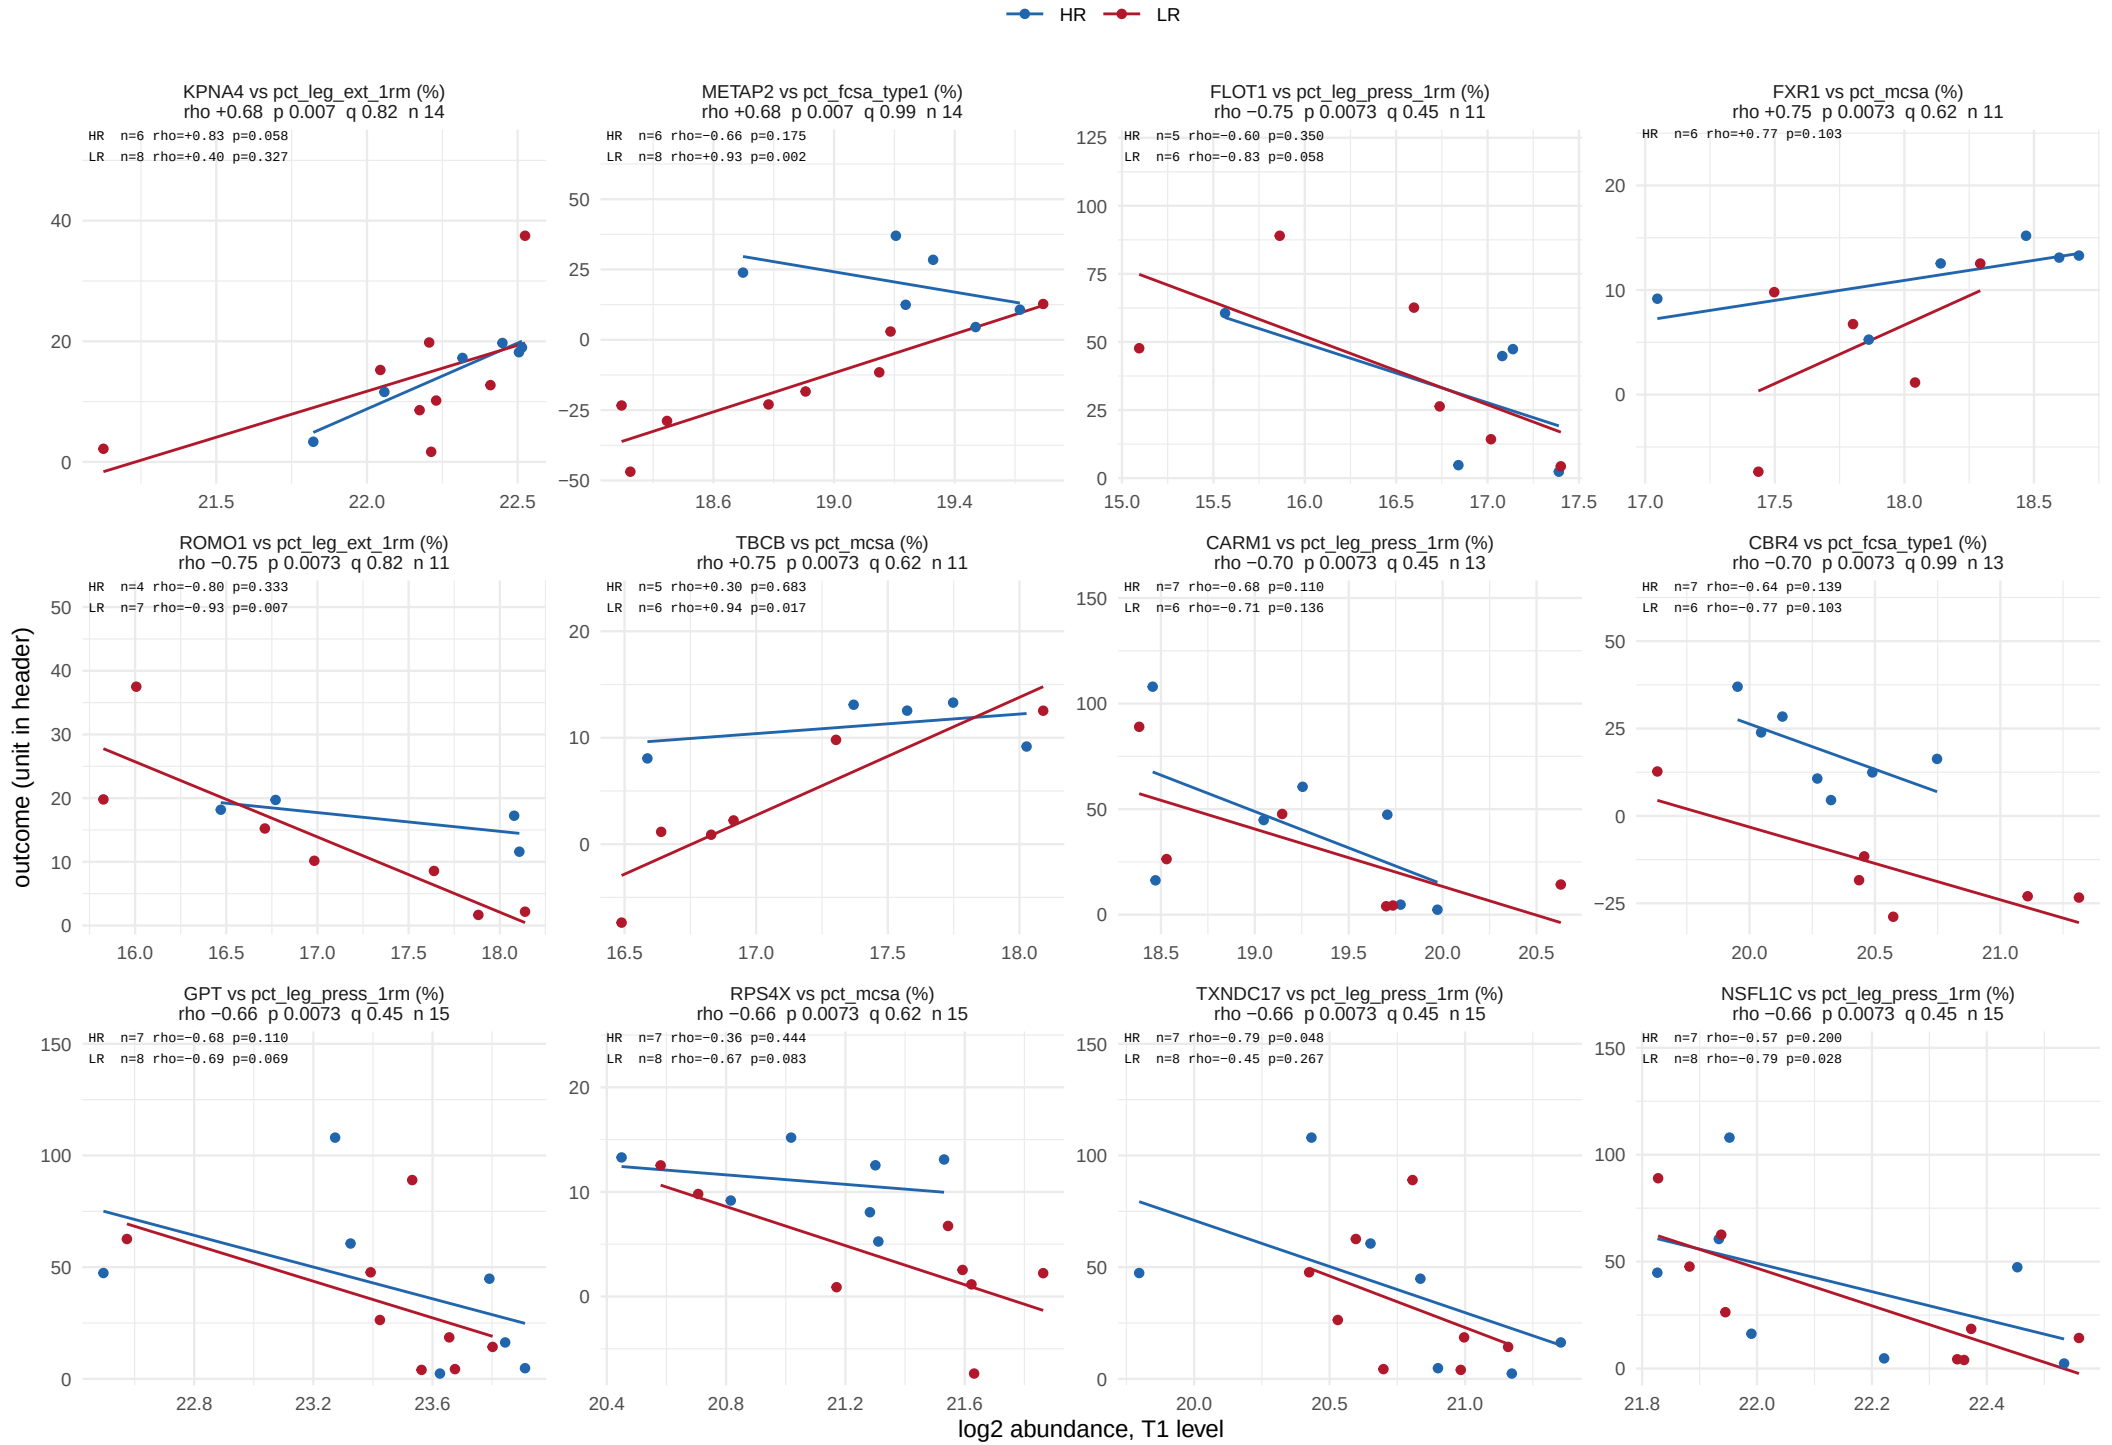

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


673 of 12553 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 10 of 57.

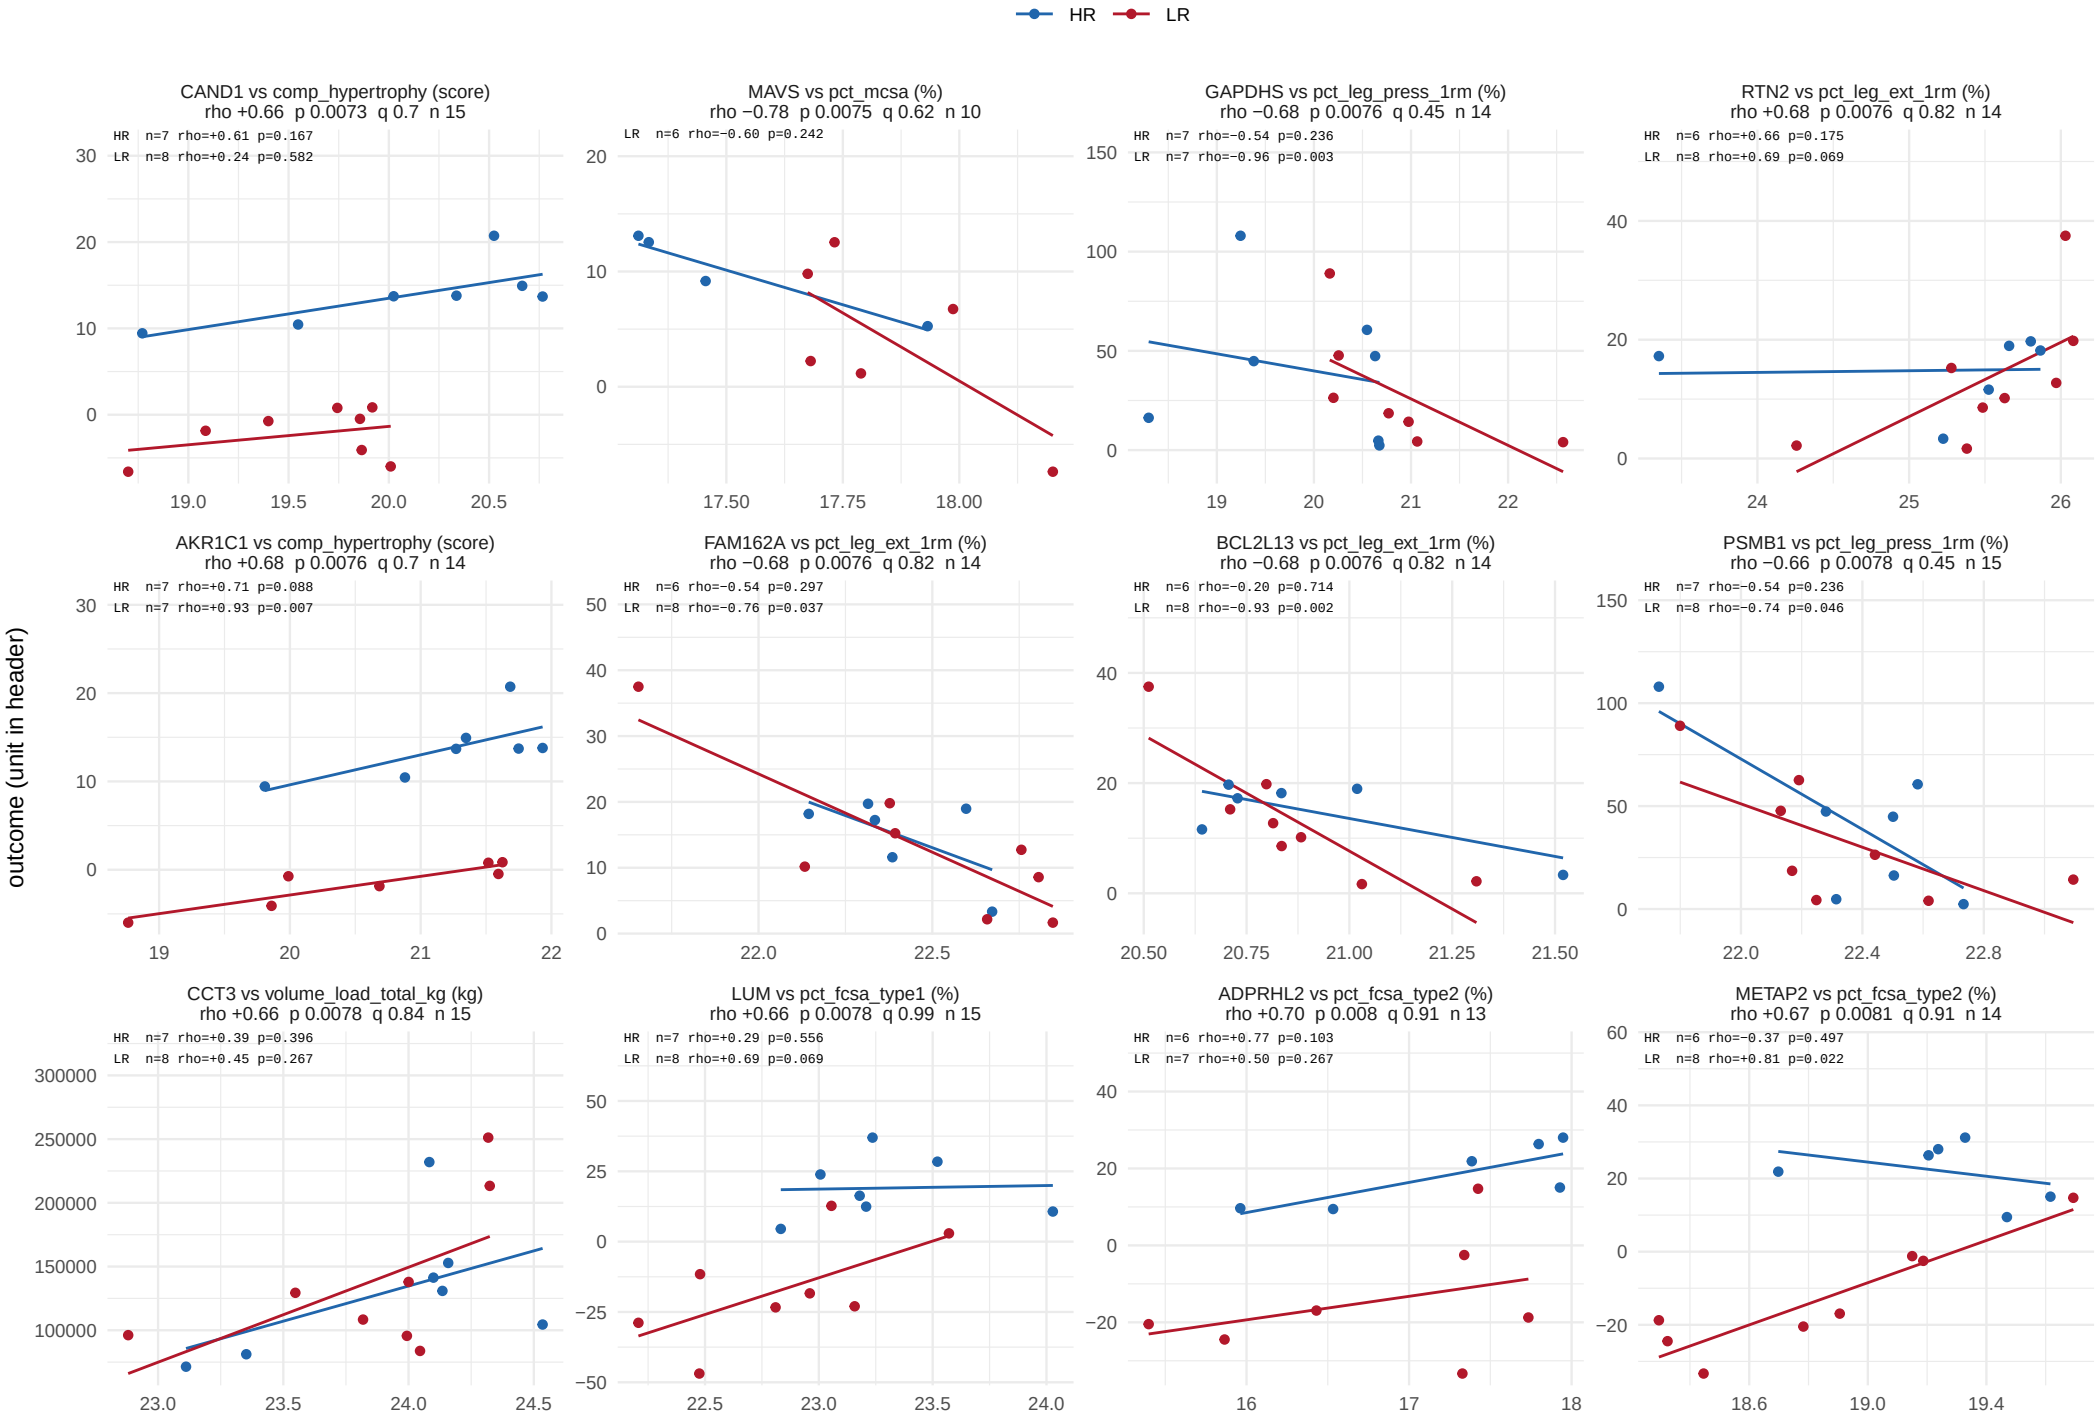

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


673 of 12553 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 11 of 57.

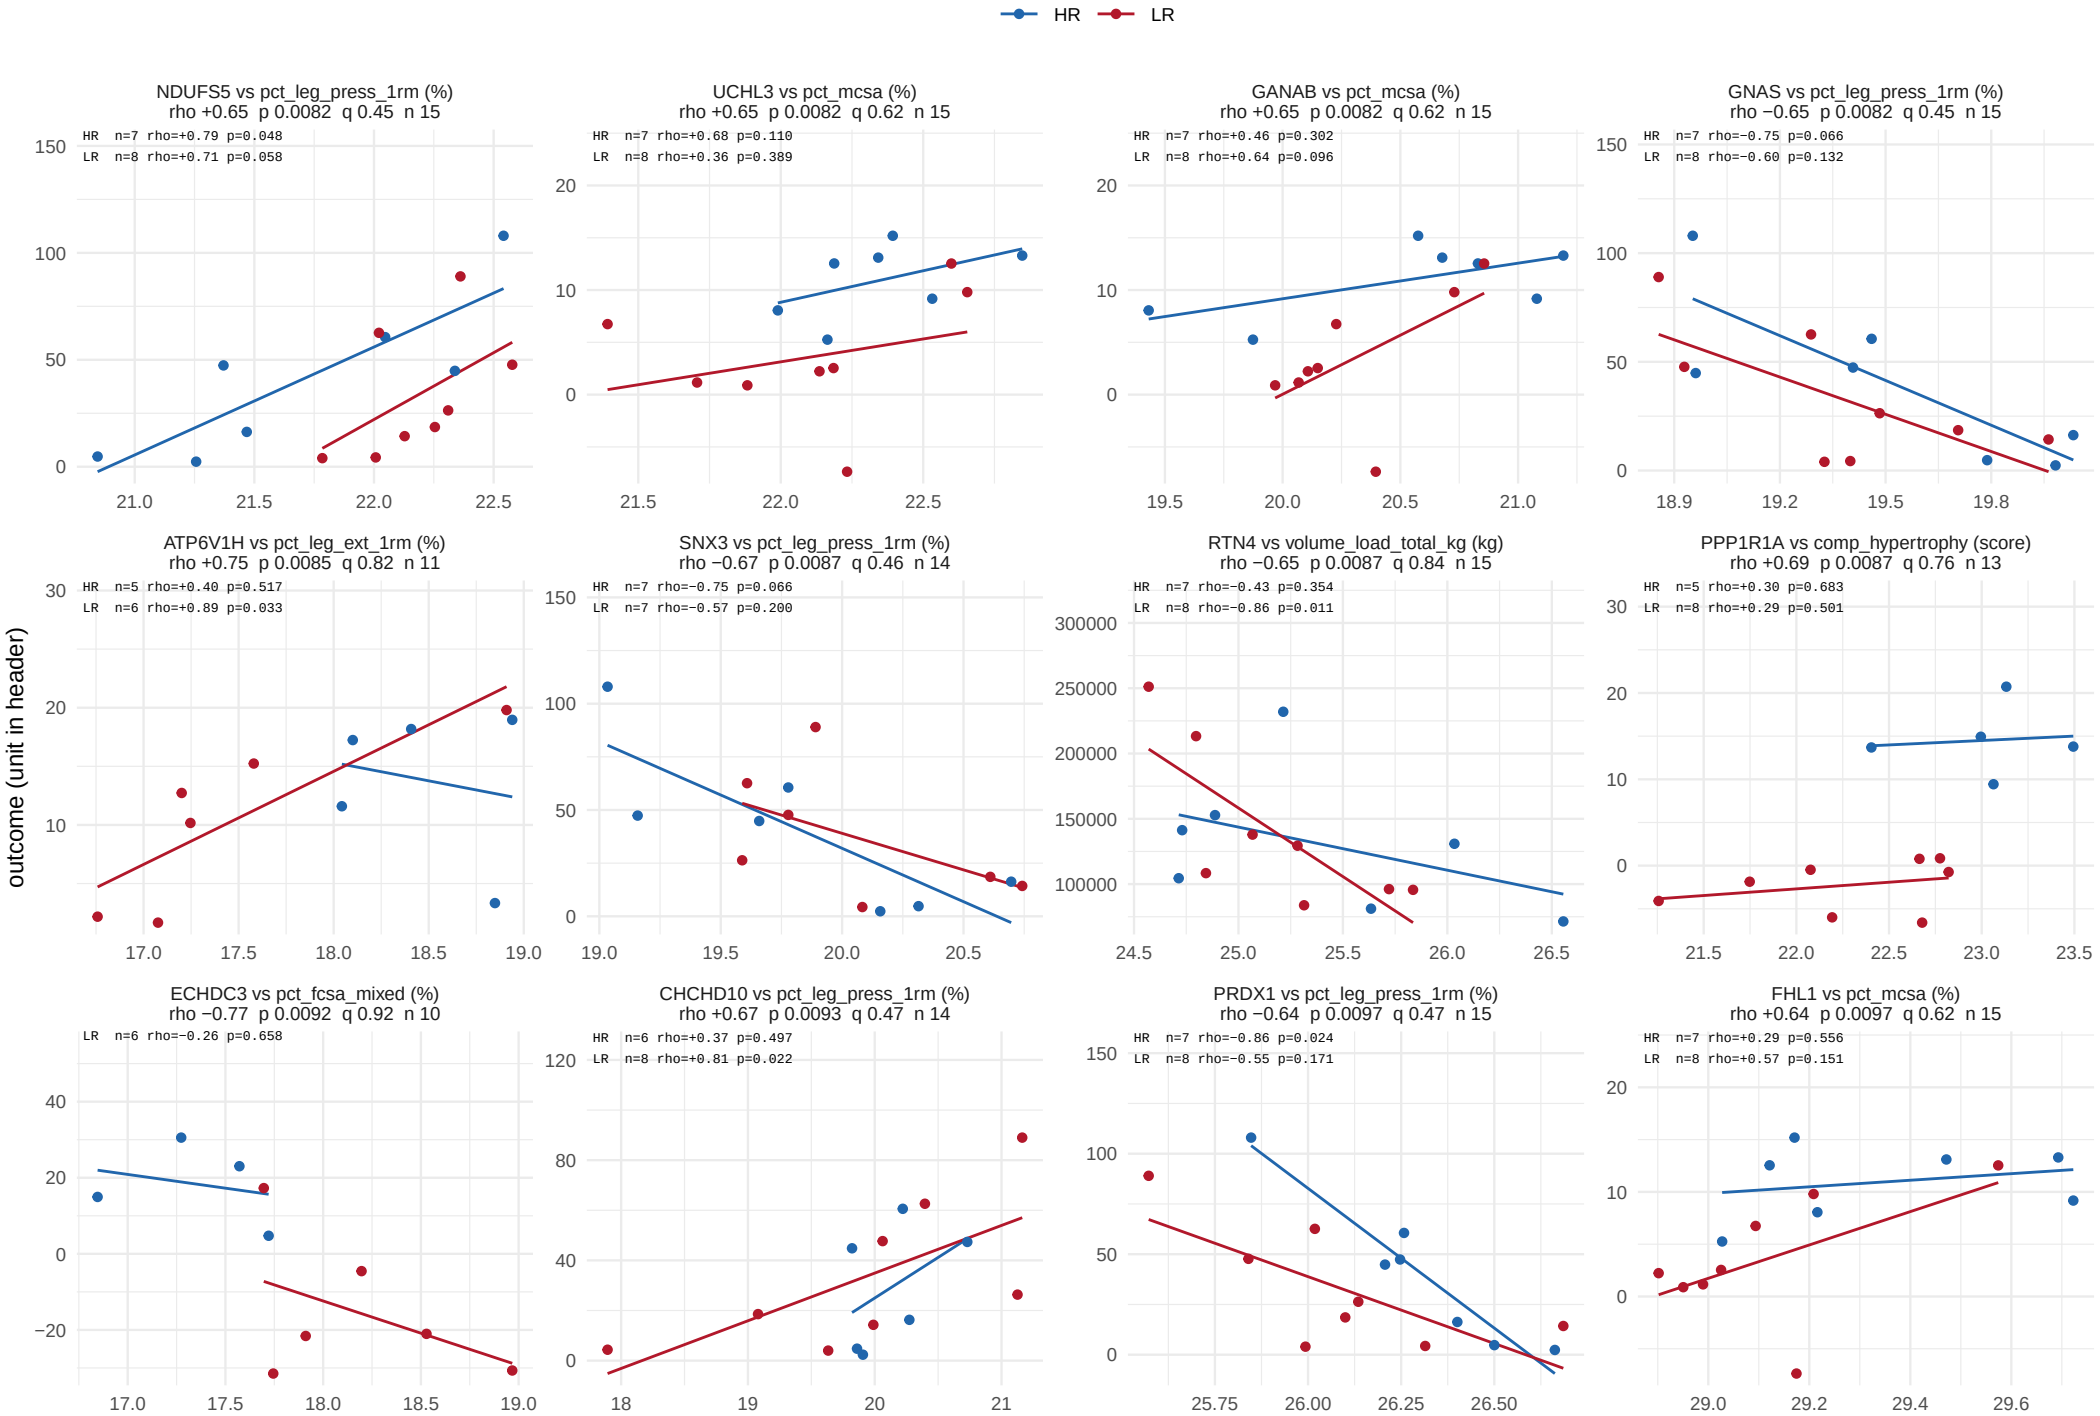

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


673 of 12553 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 12 of 57.

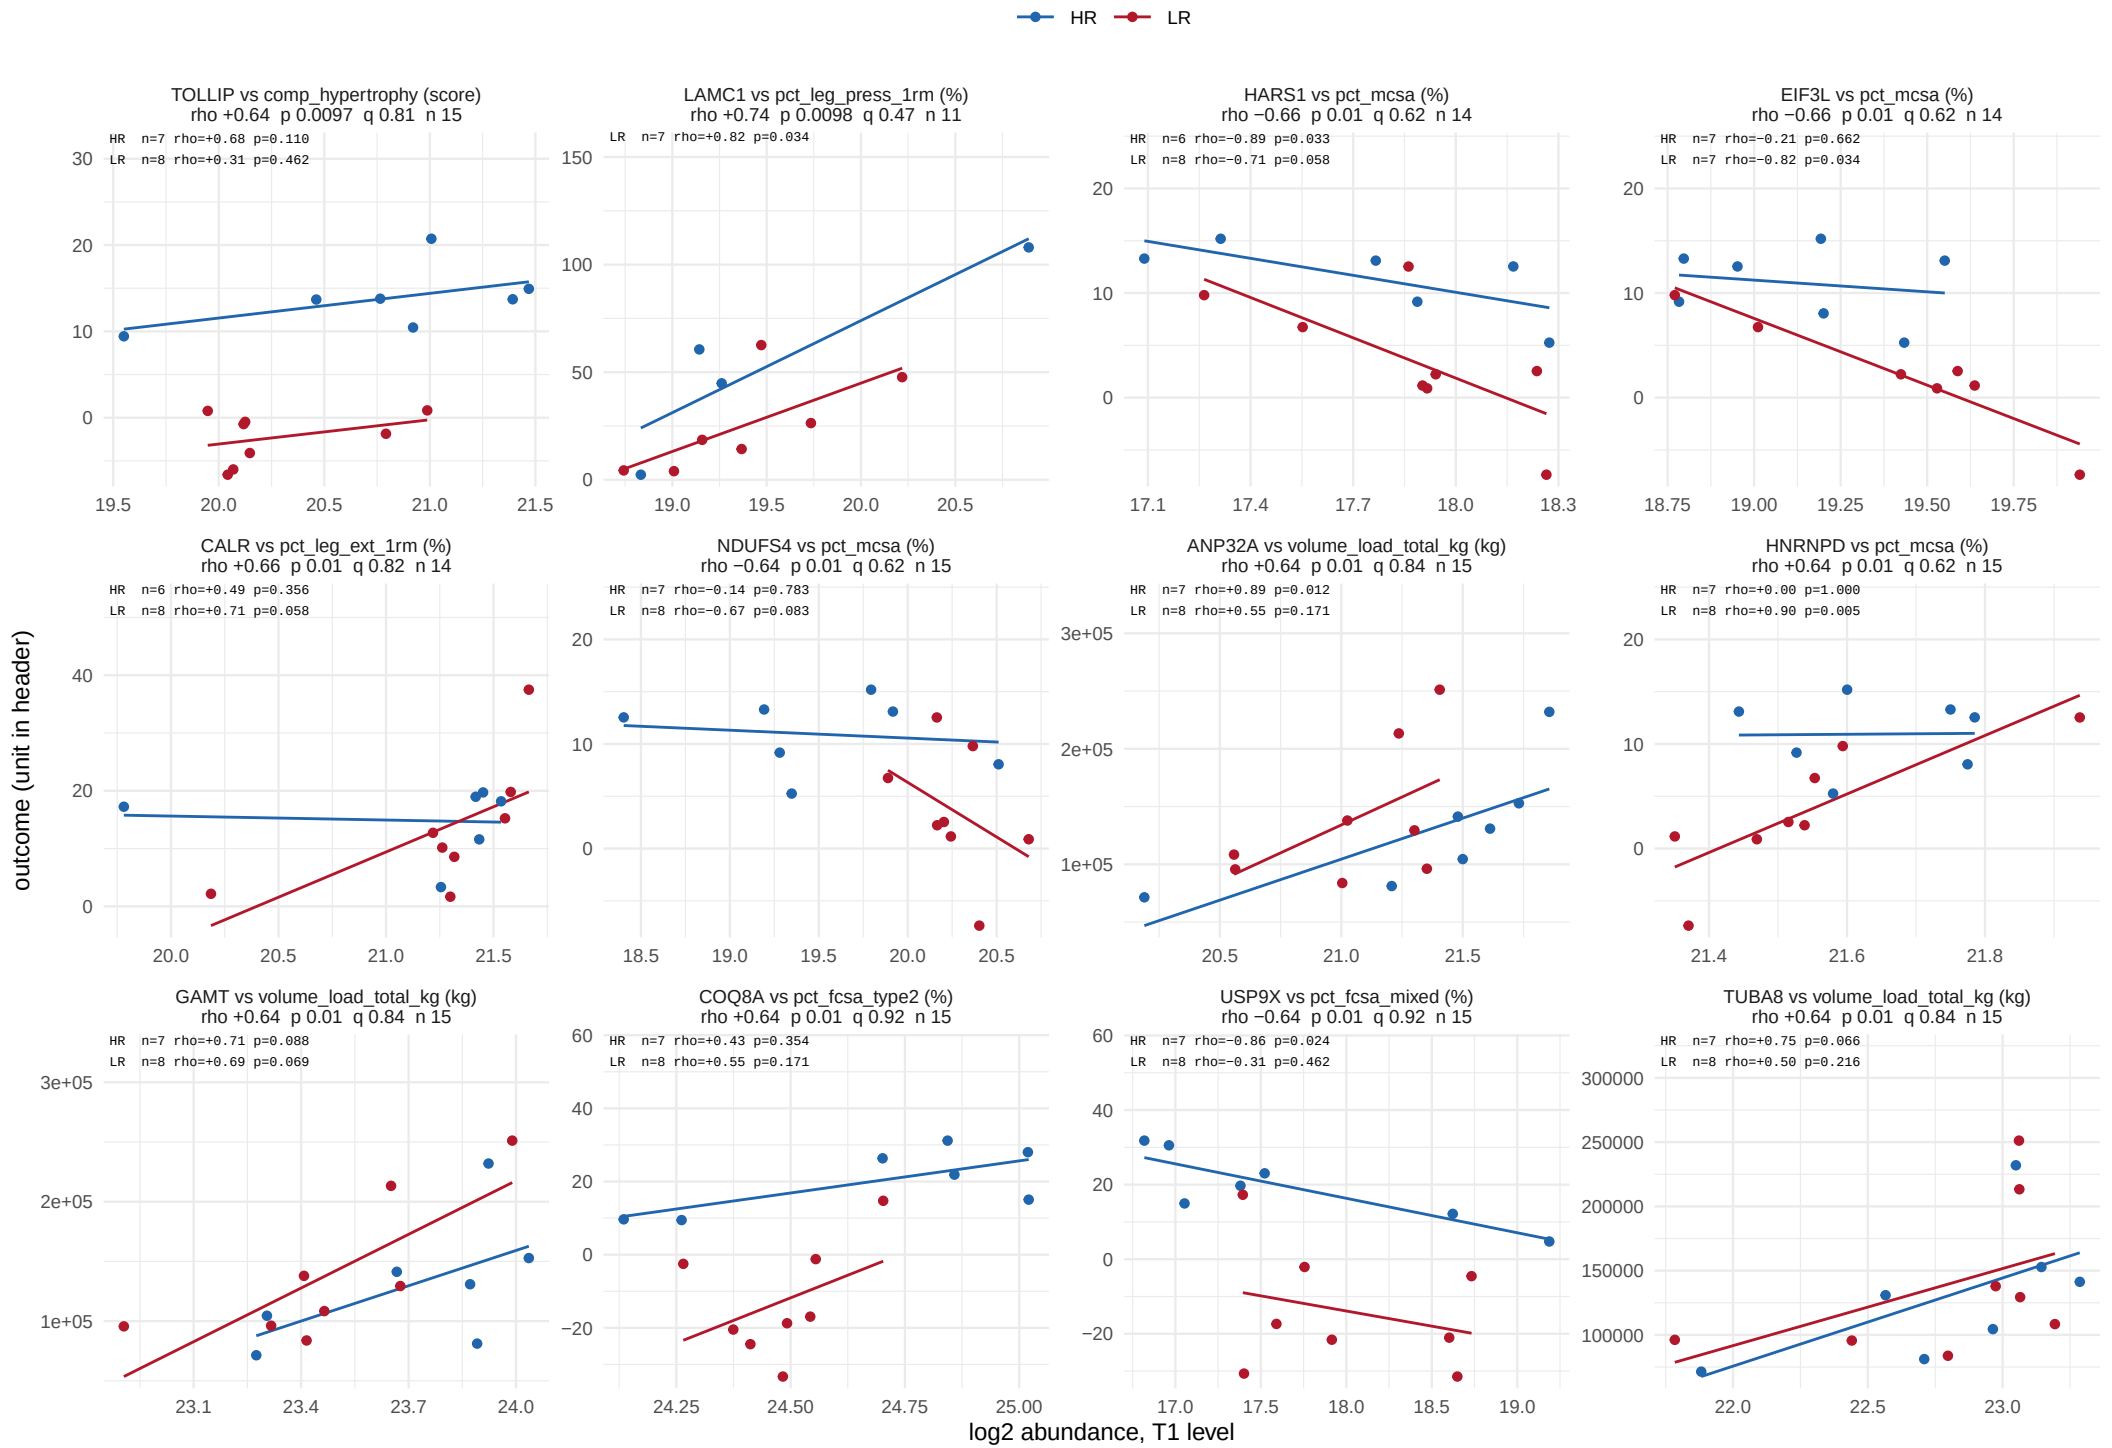

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


673 of 12553 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 13 of 57.

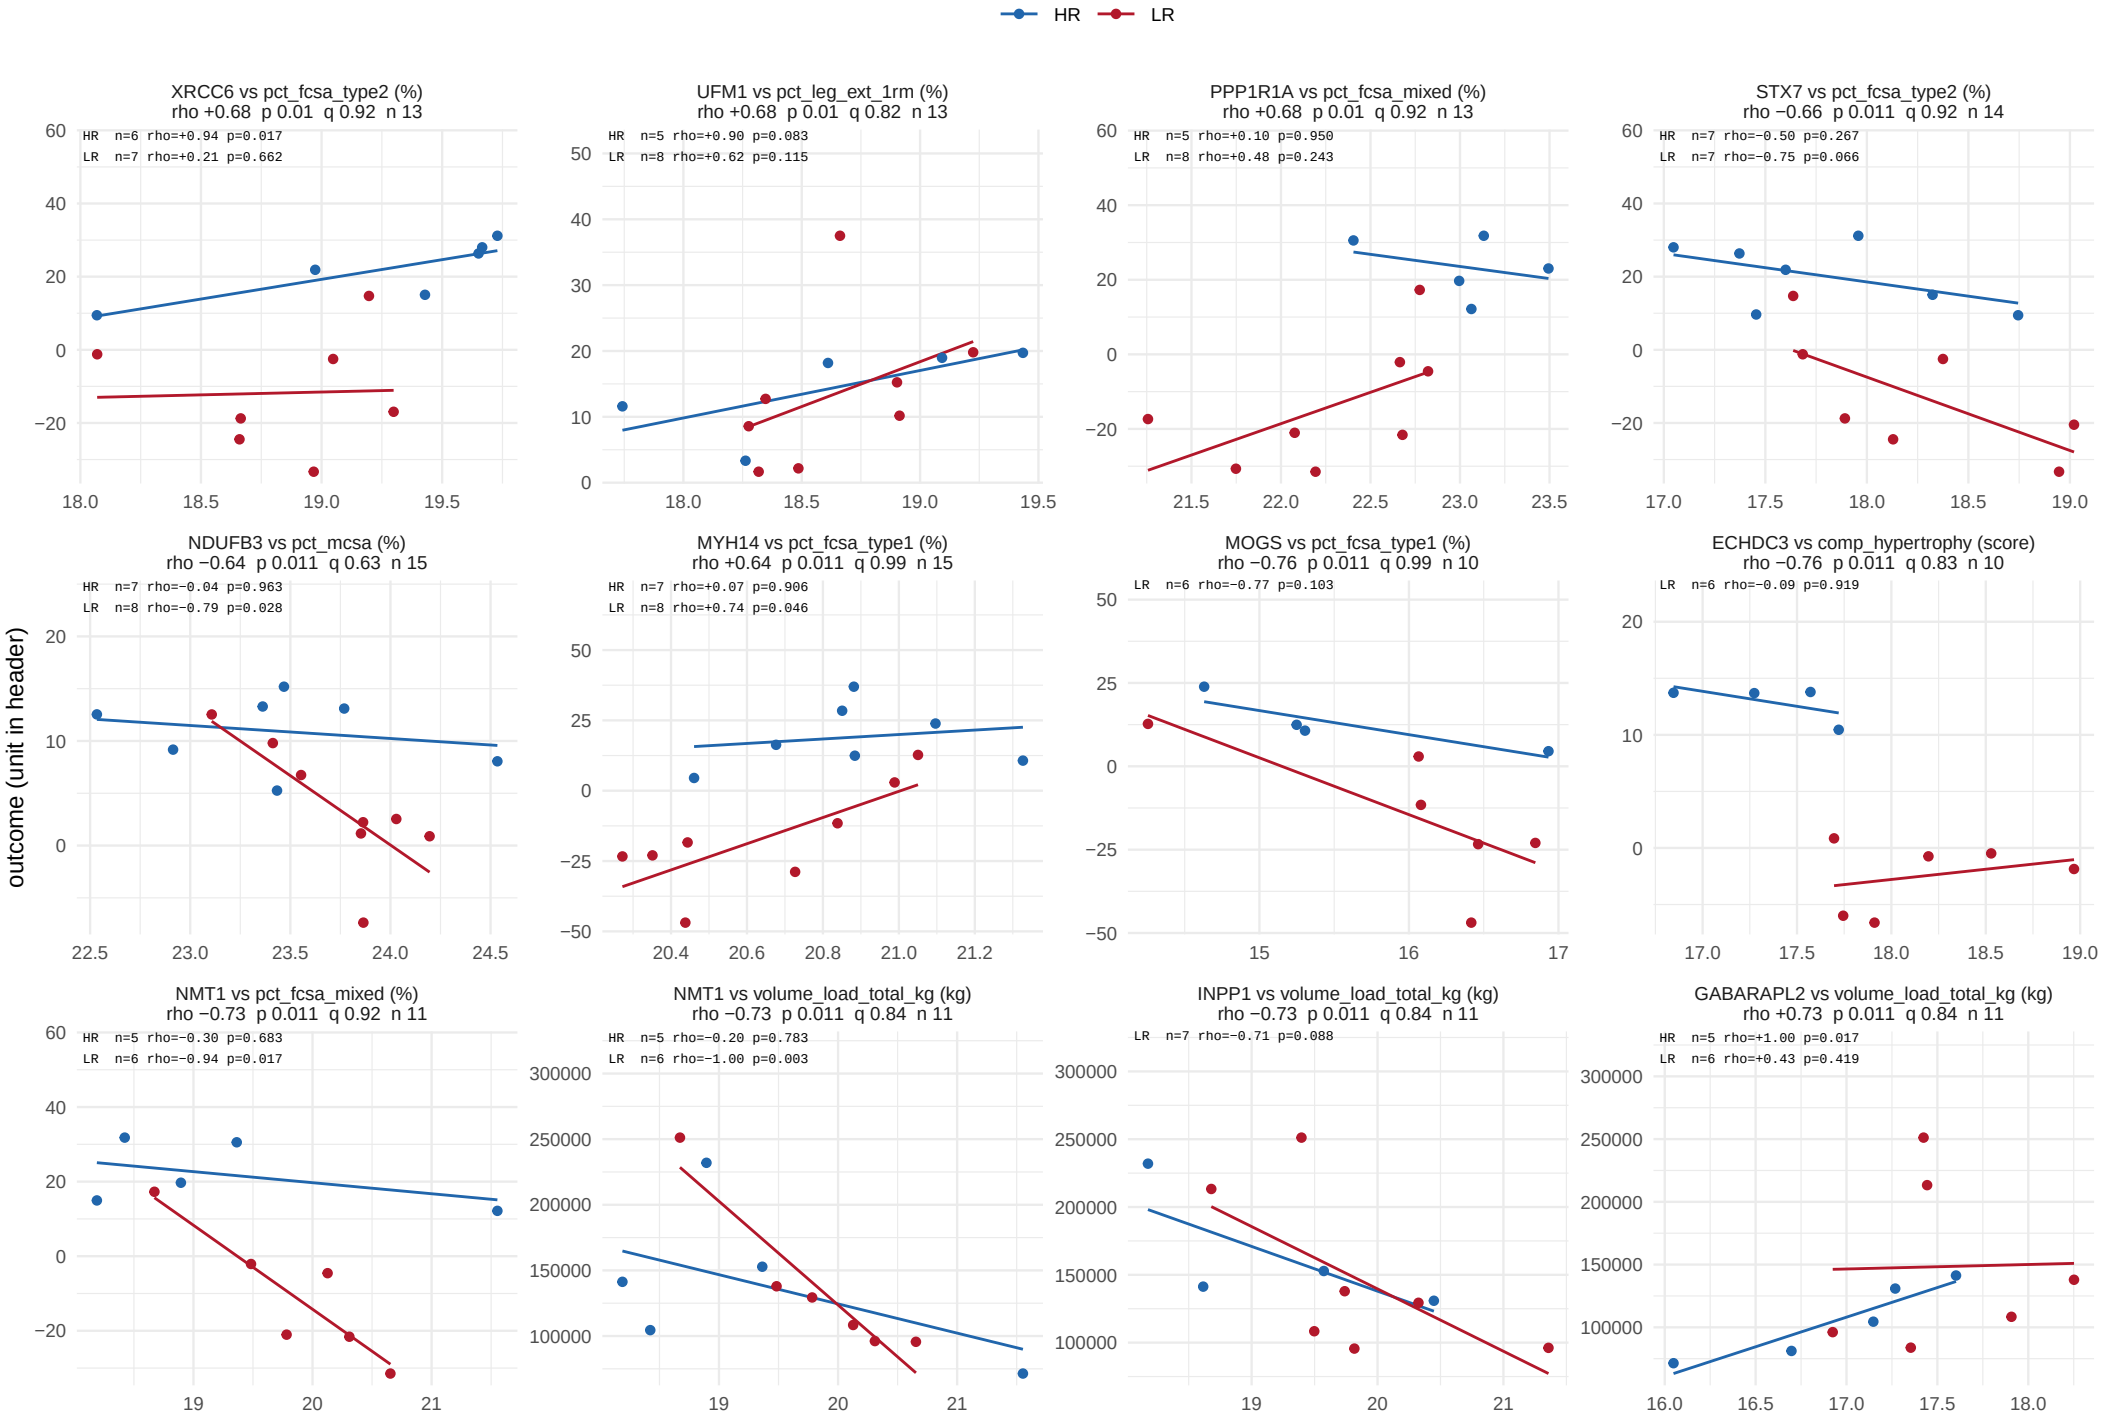

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


673 of 12553 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 14 of 57.

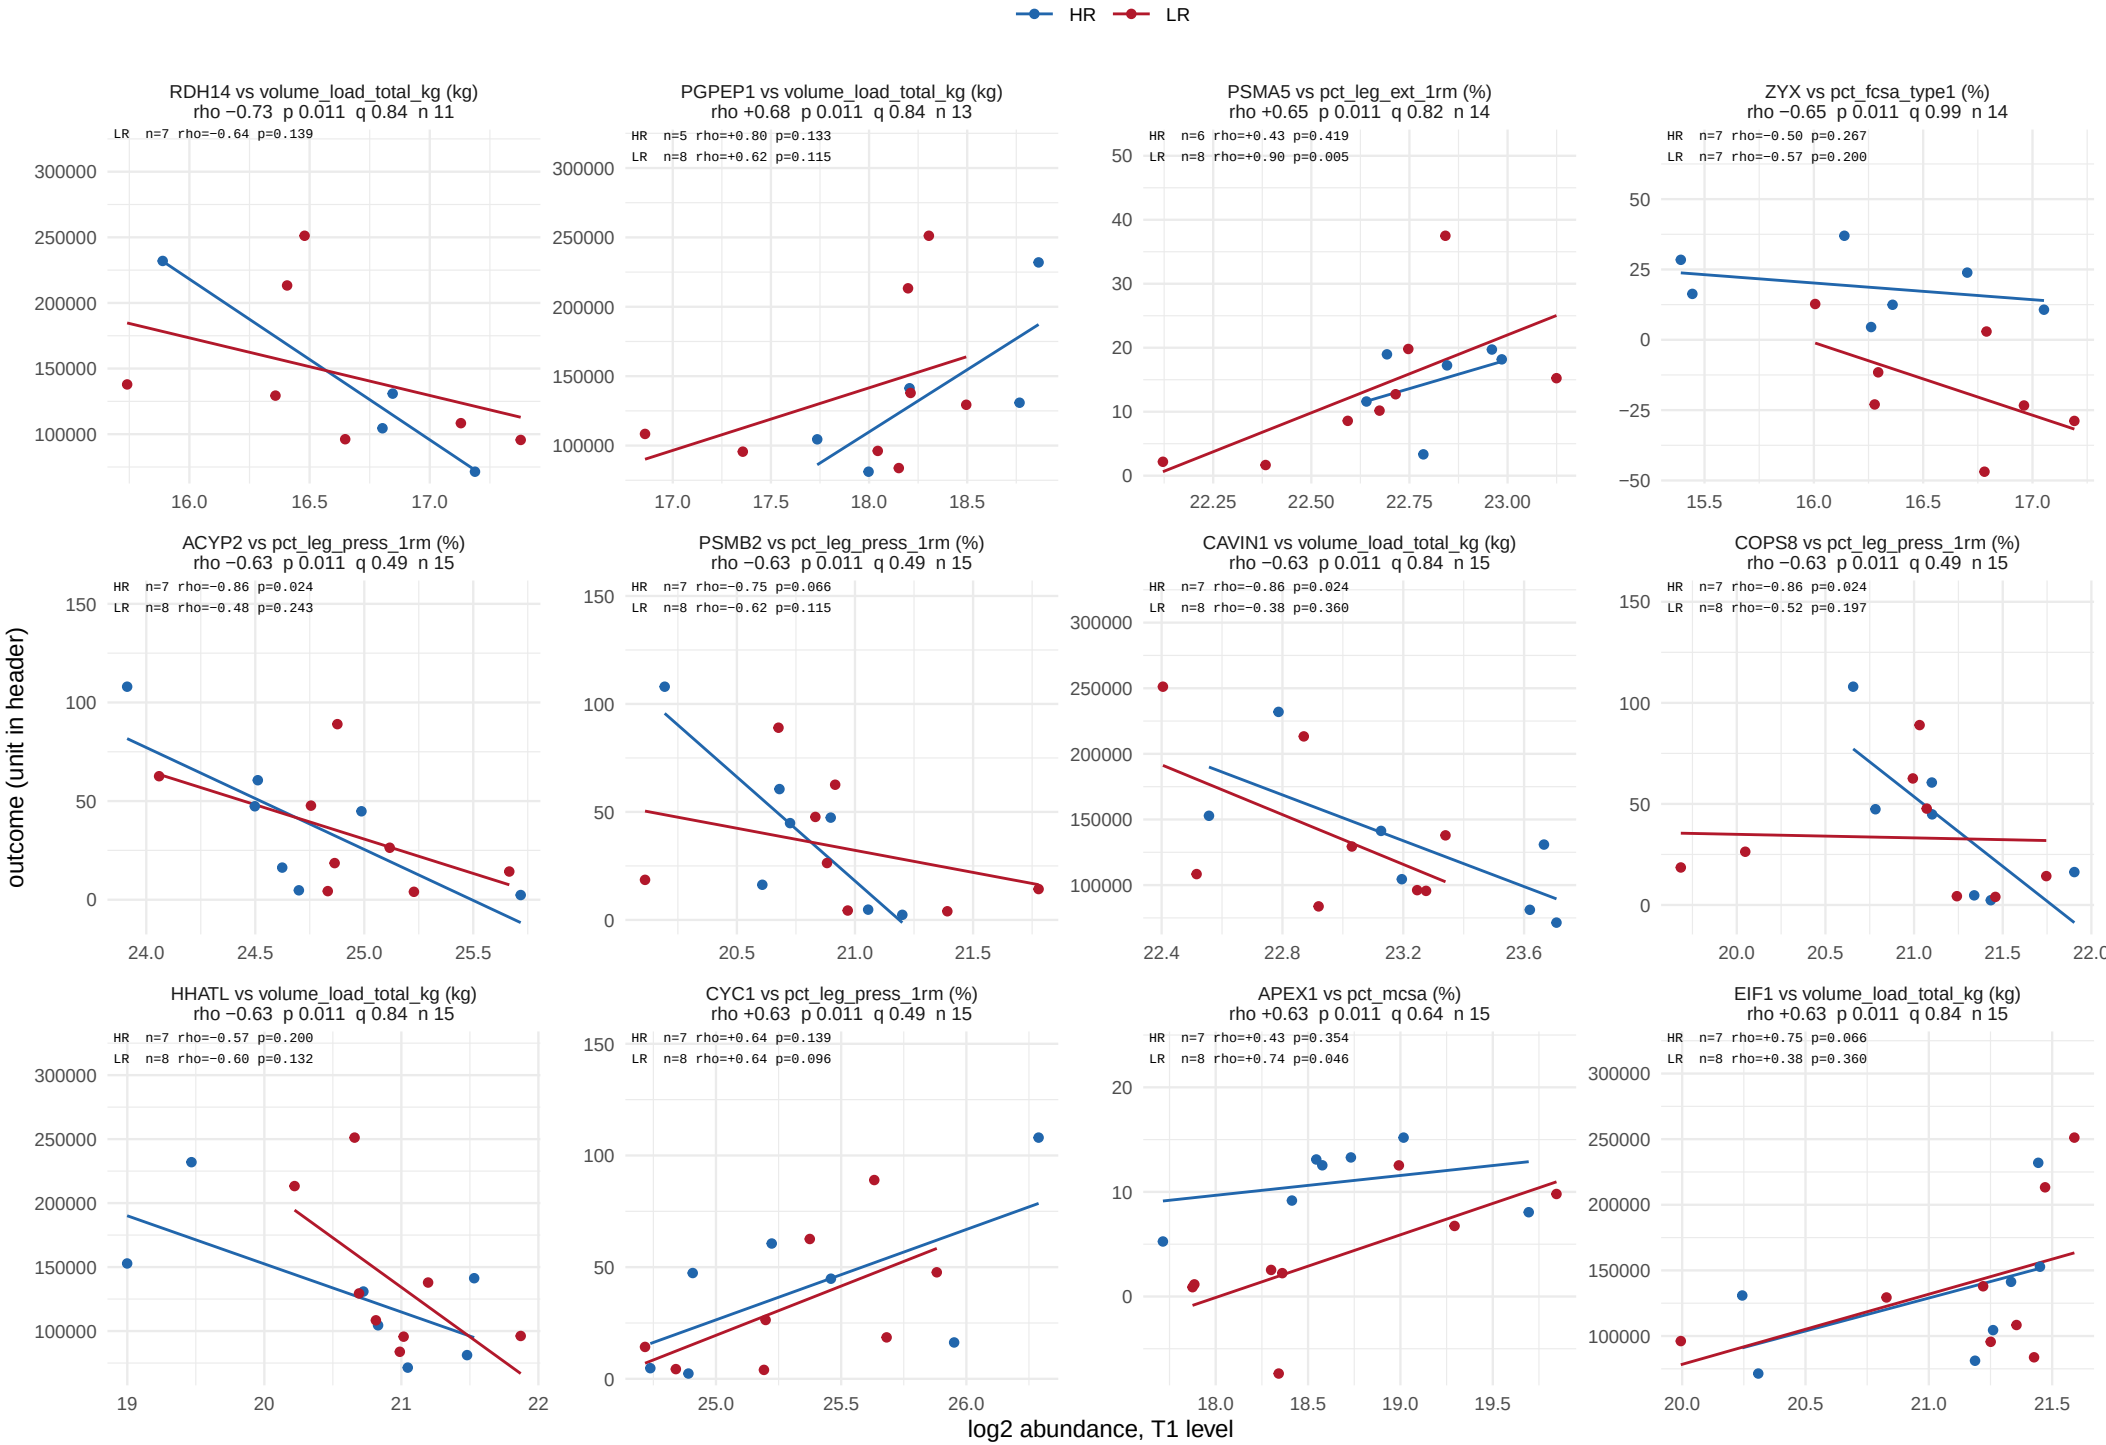

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


673 of 12553 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 15 of 57.

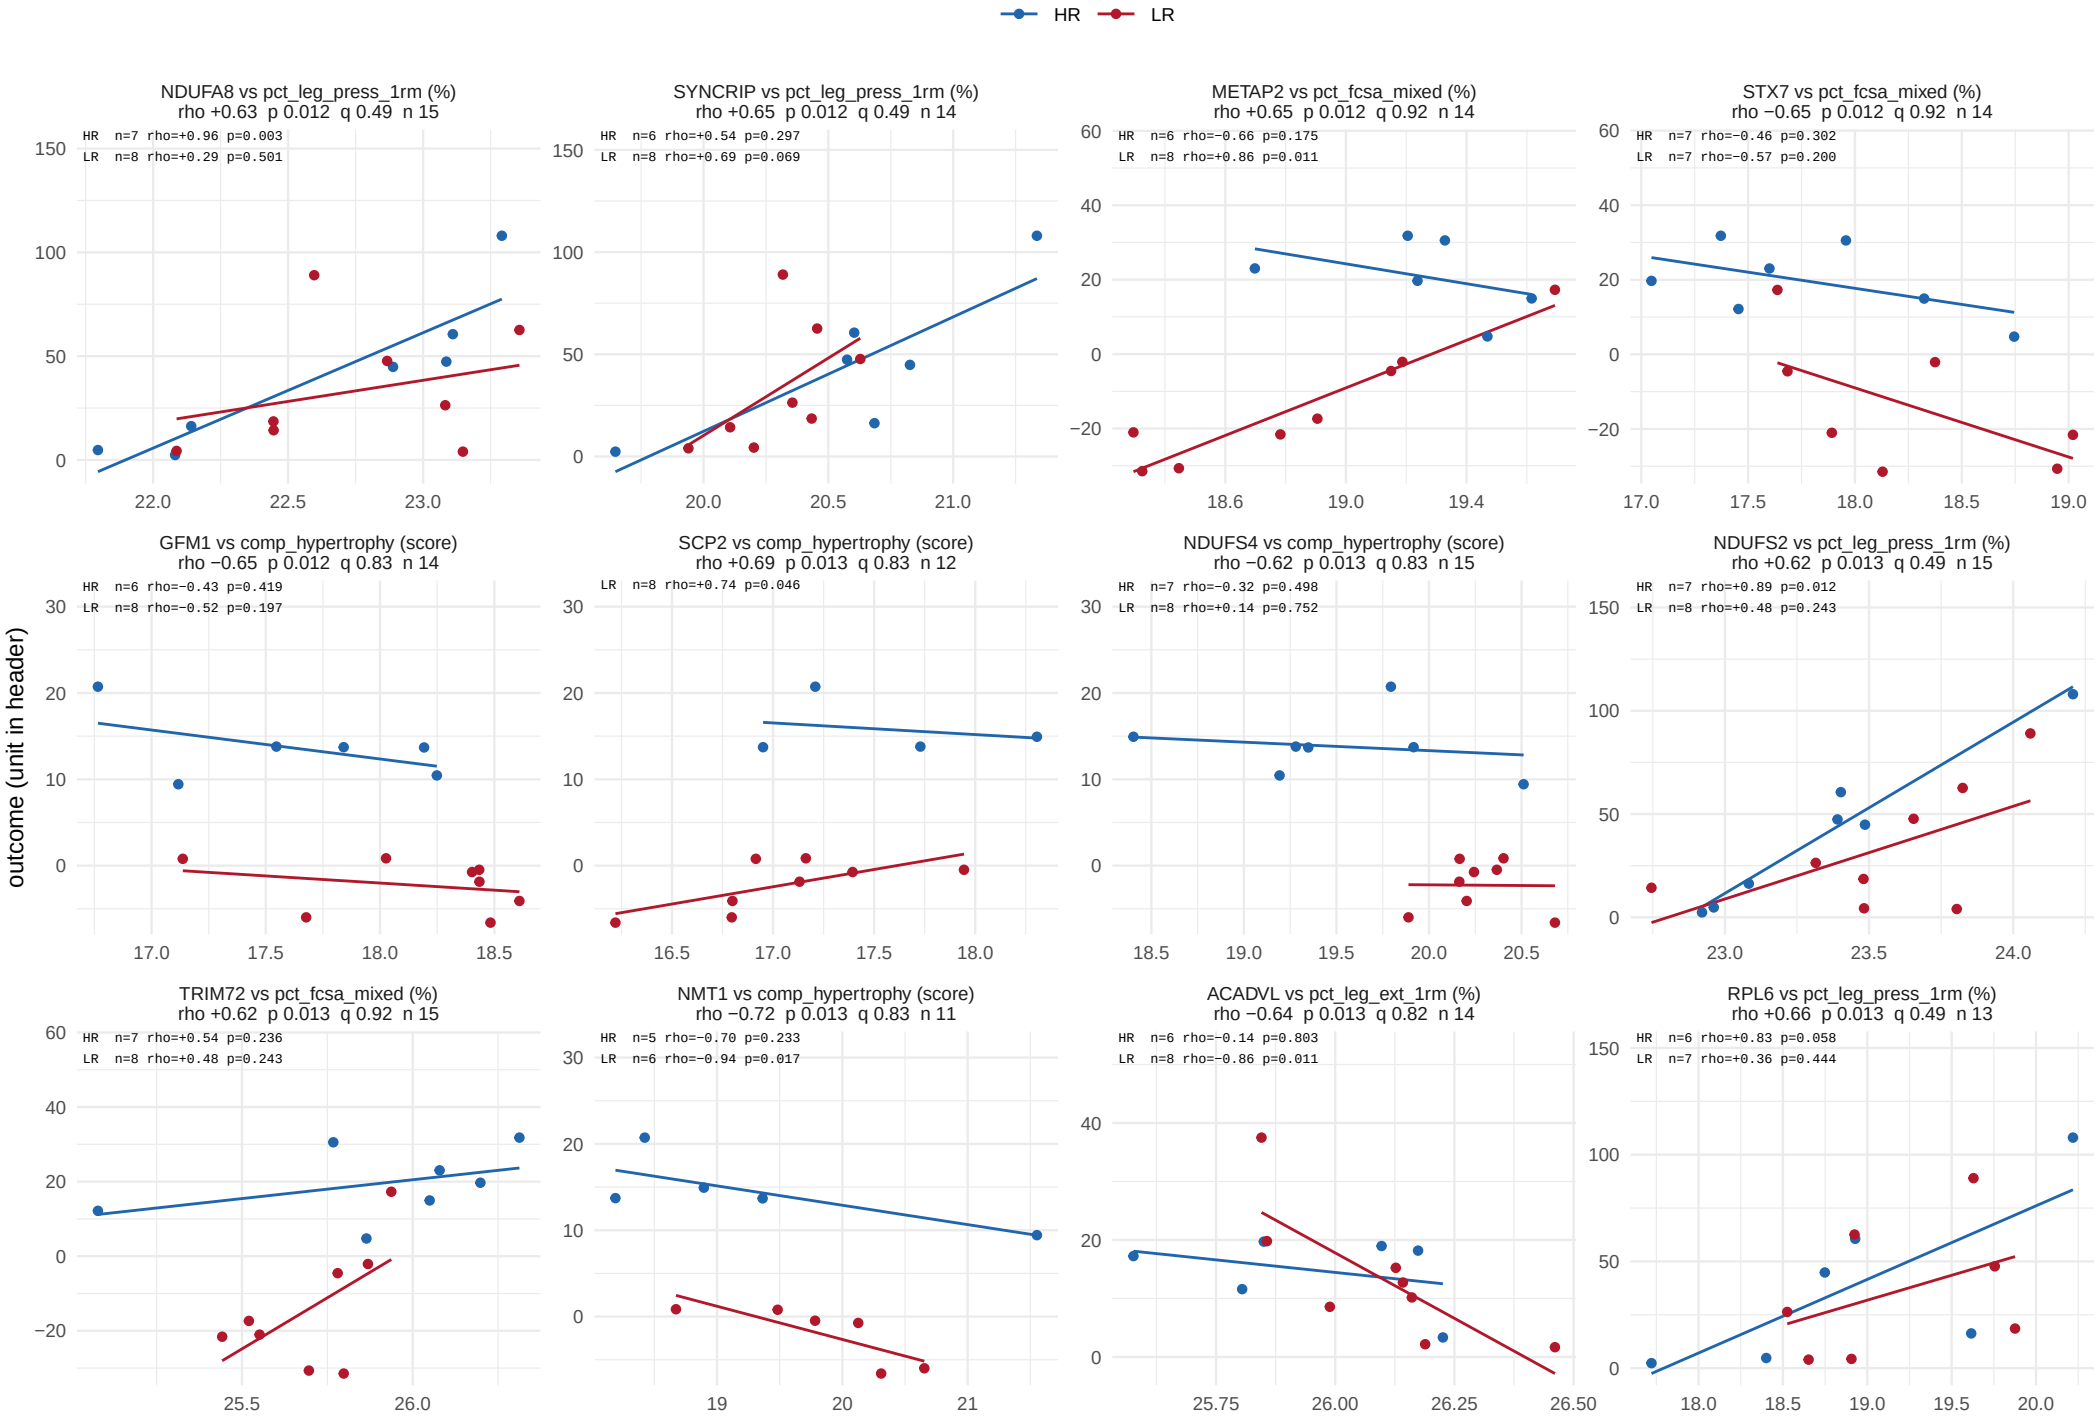

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


673 of 12553 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 16 of 57.

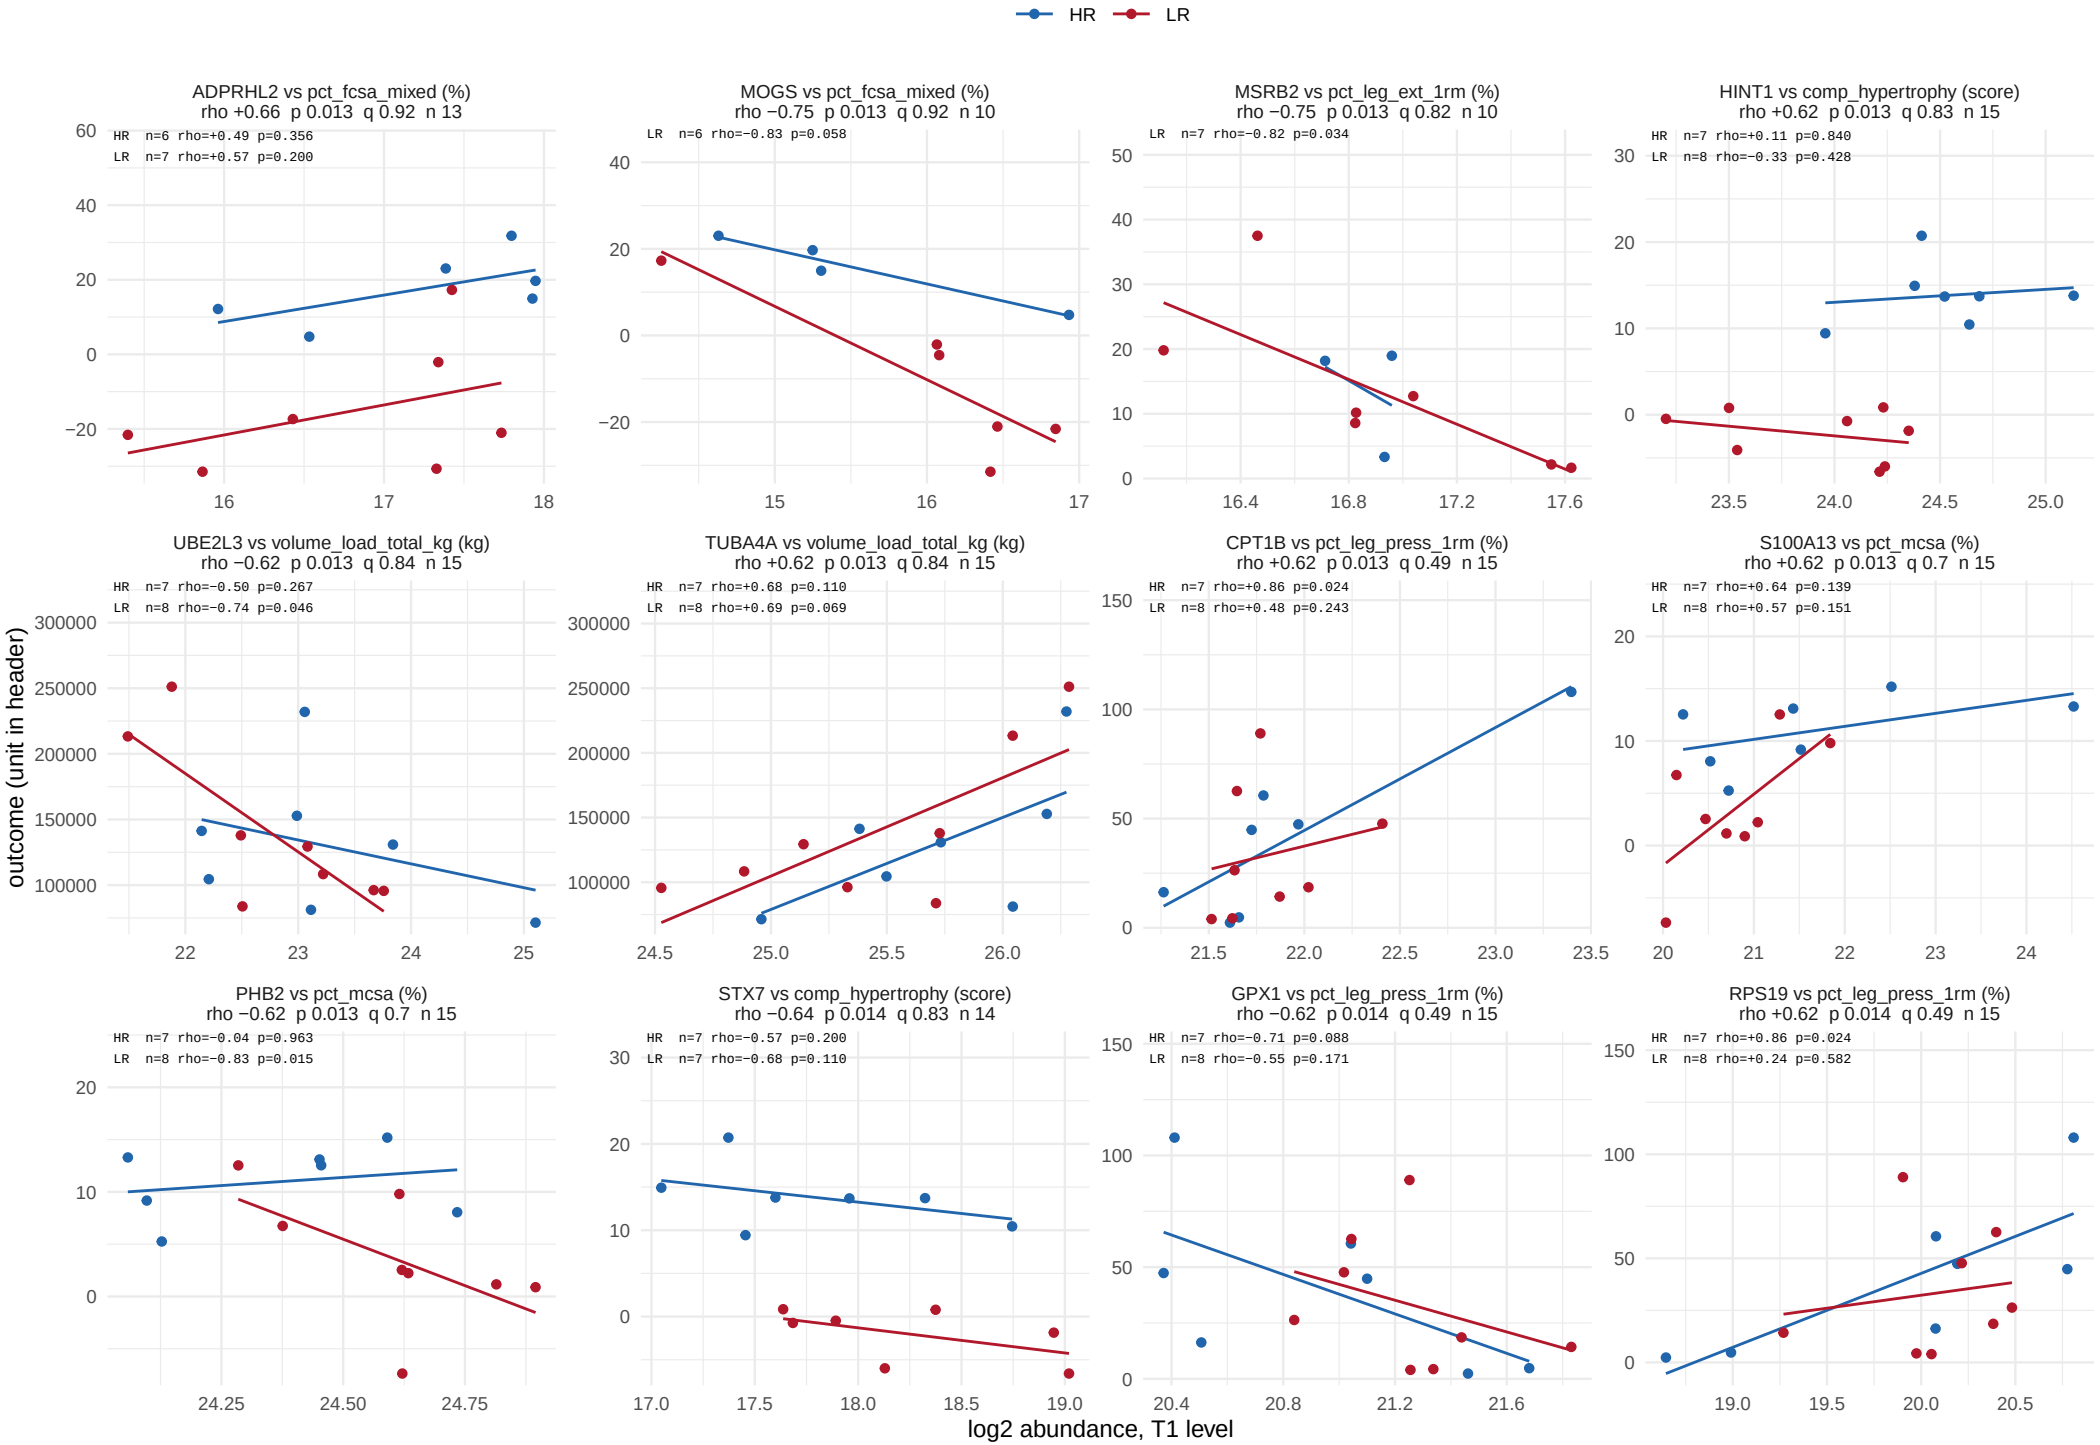

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


673 of 12553 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 17 of 57.

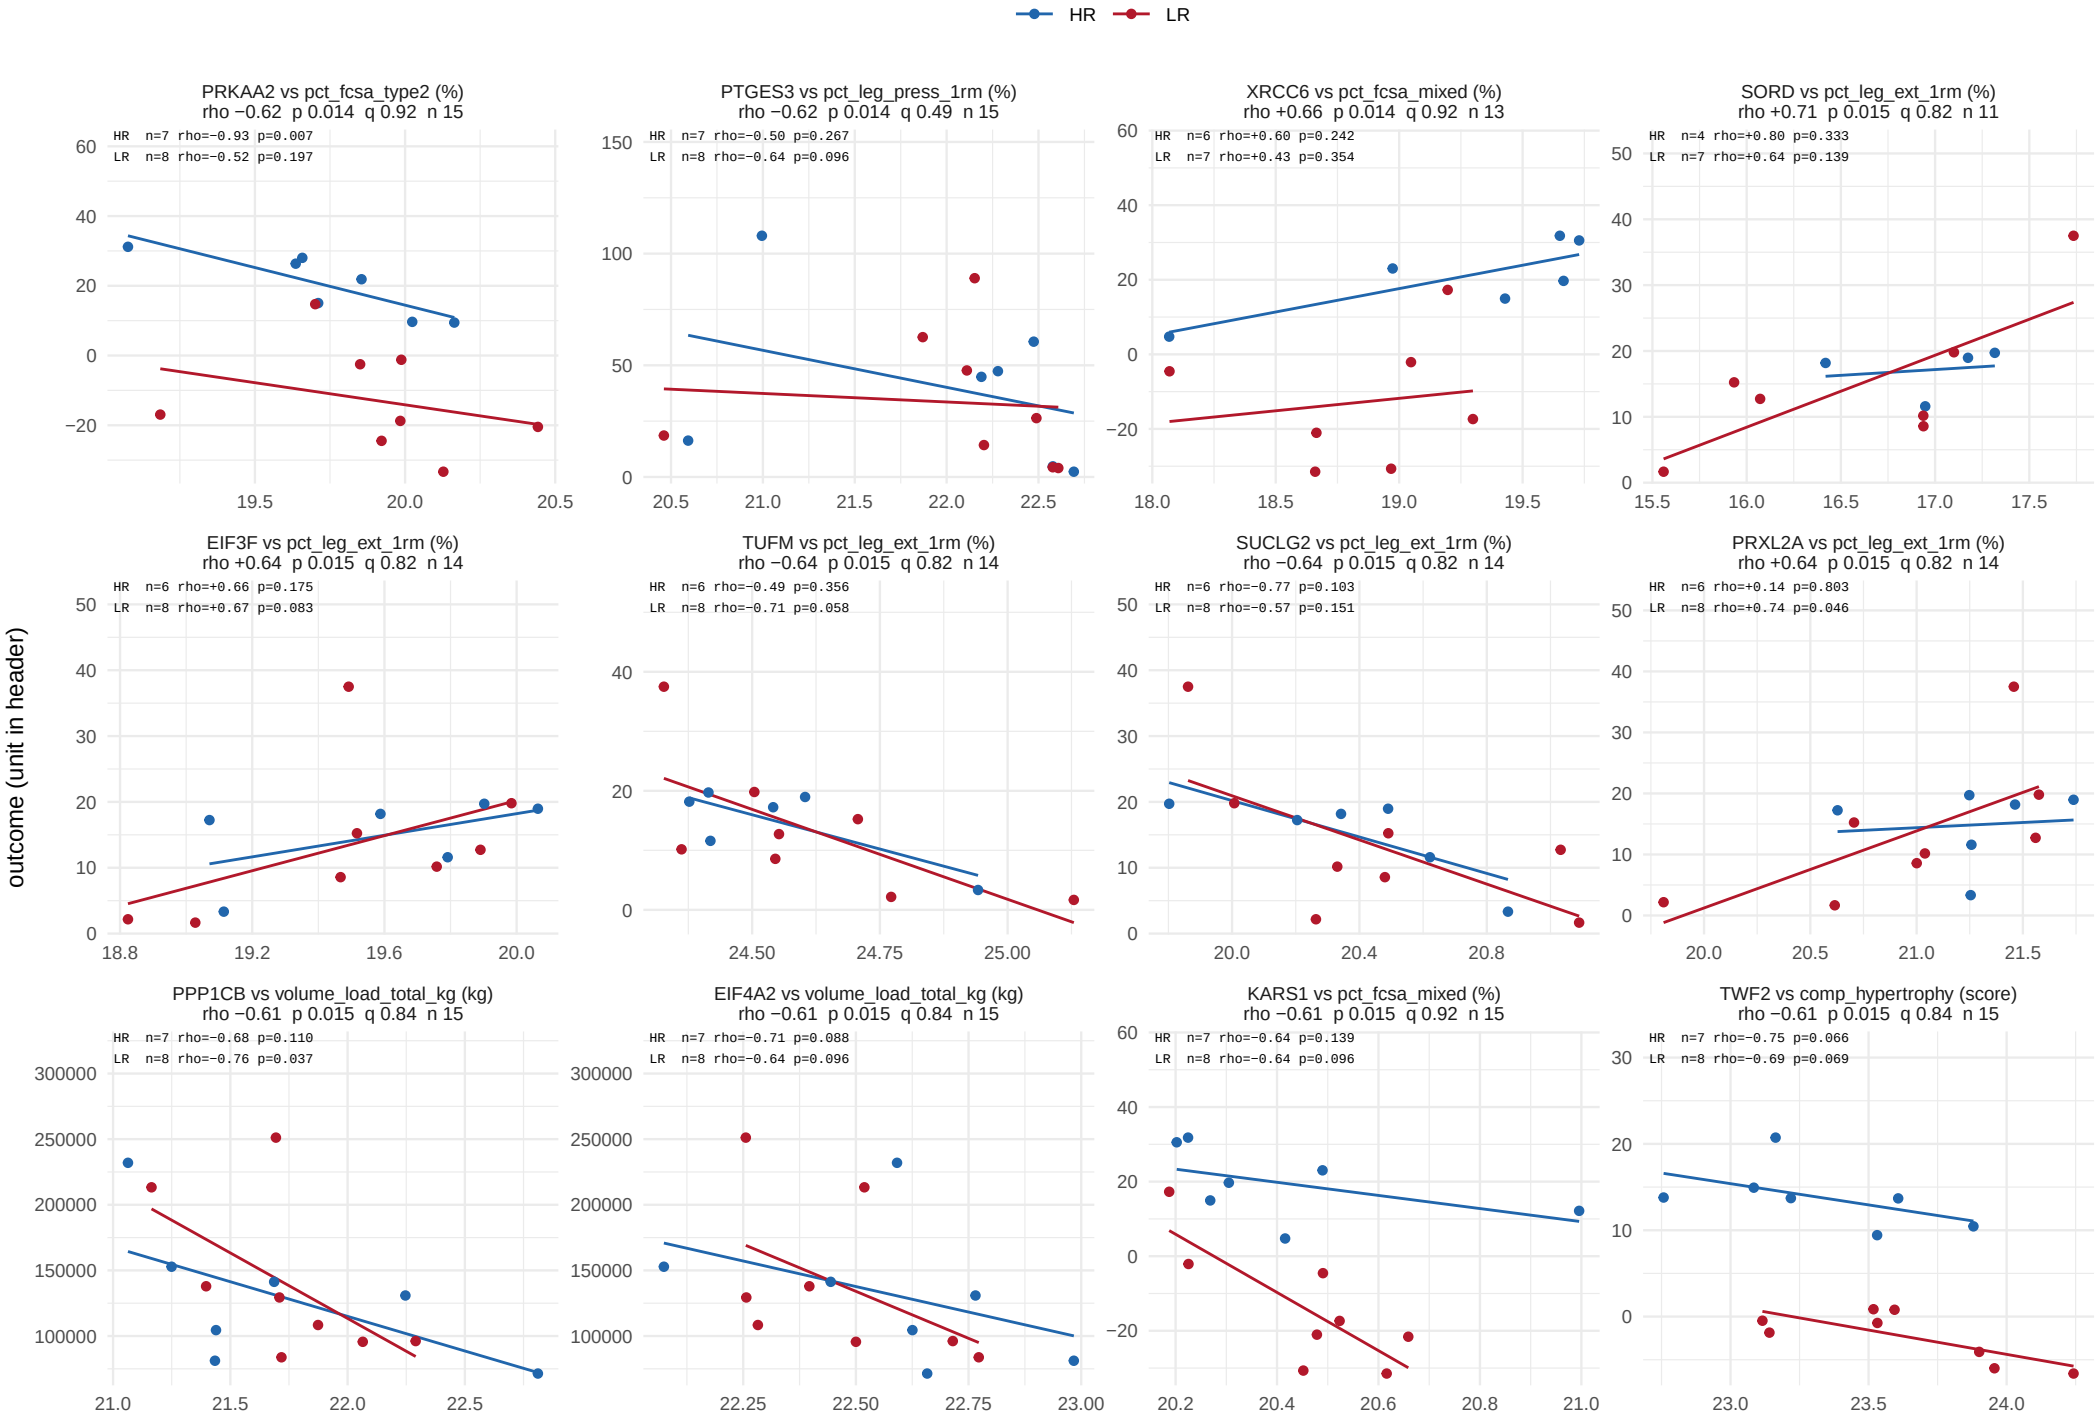

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


673 of 12553 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 18 of 57.

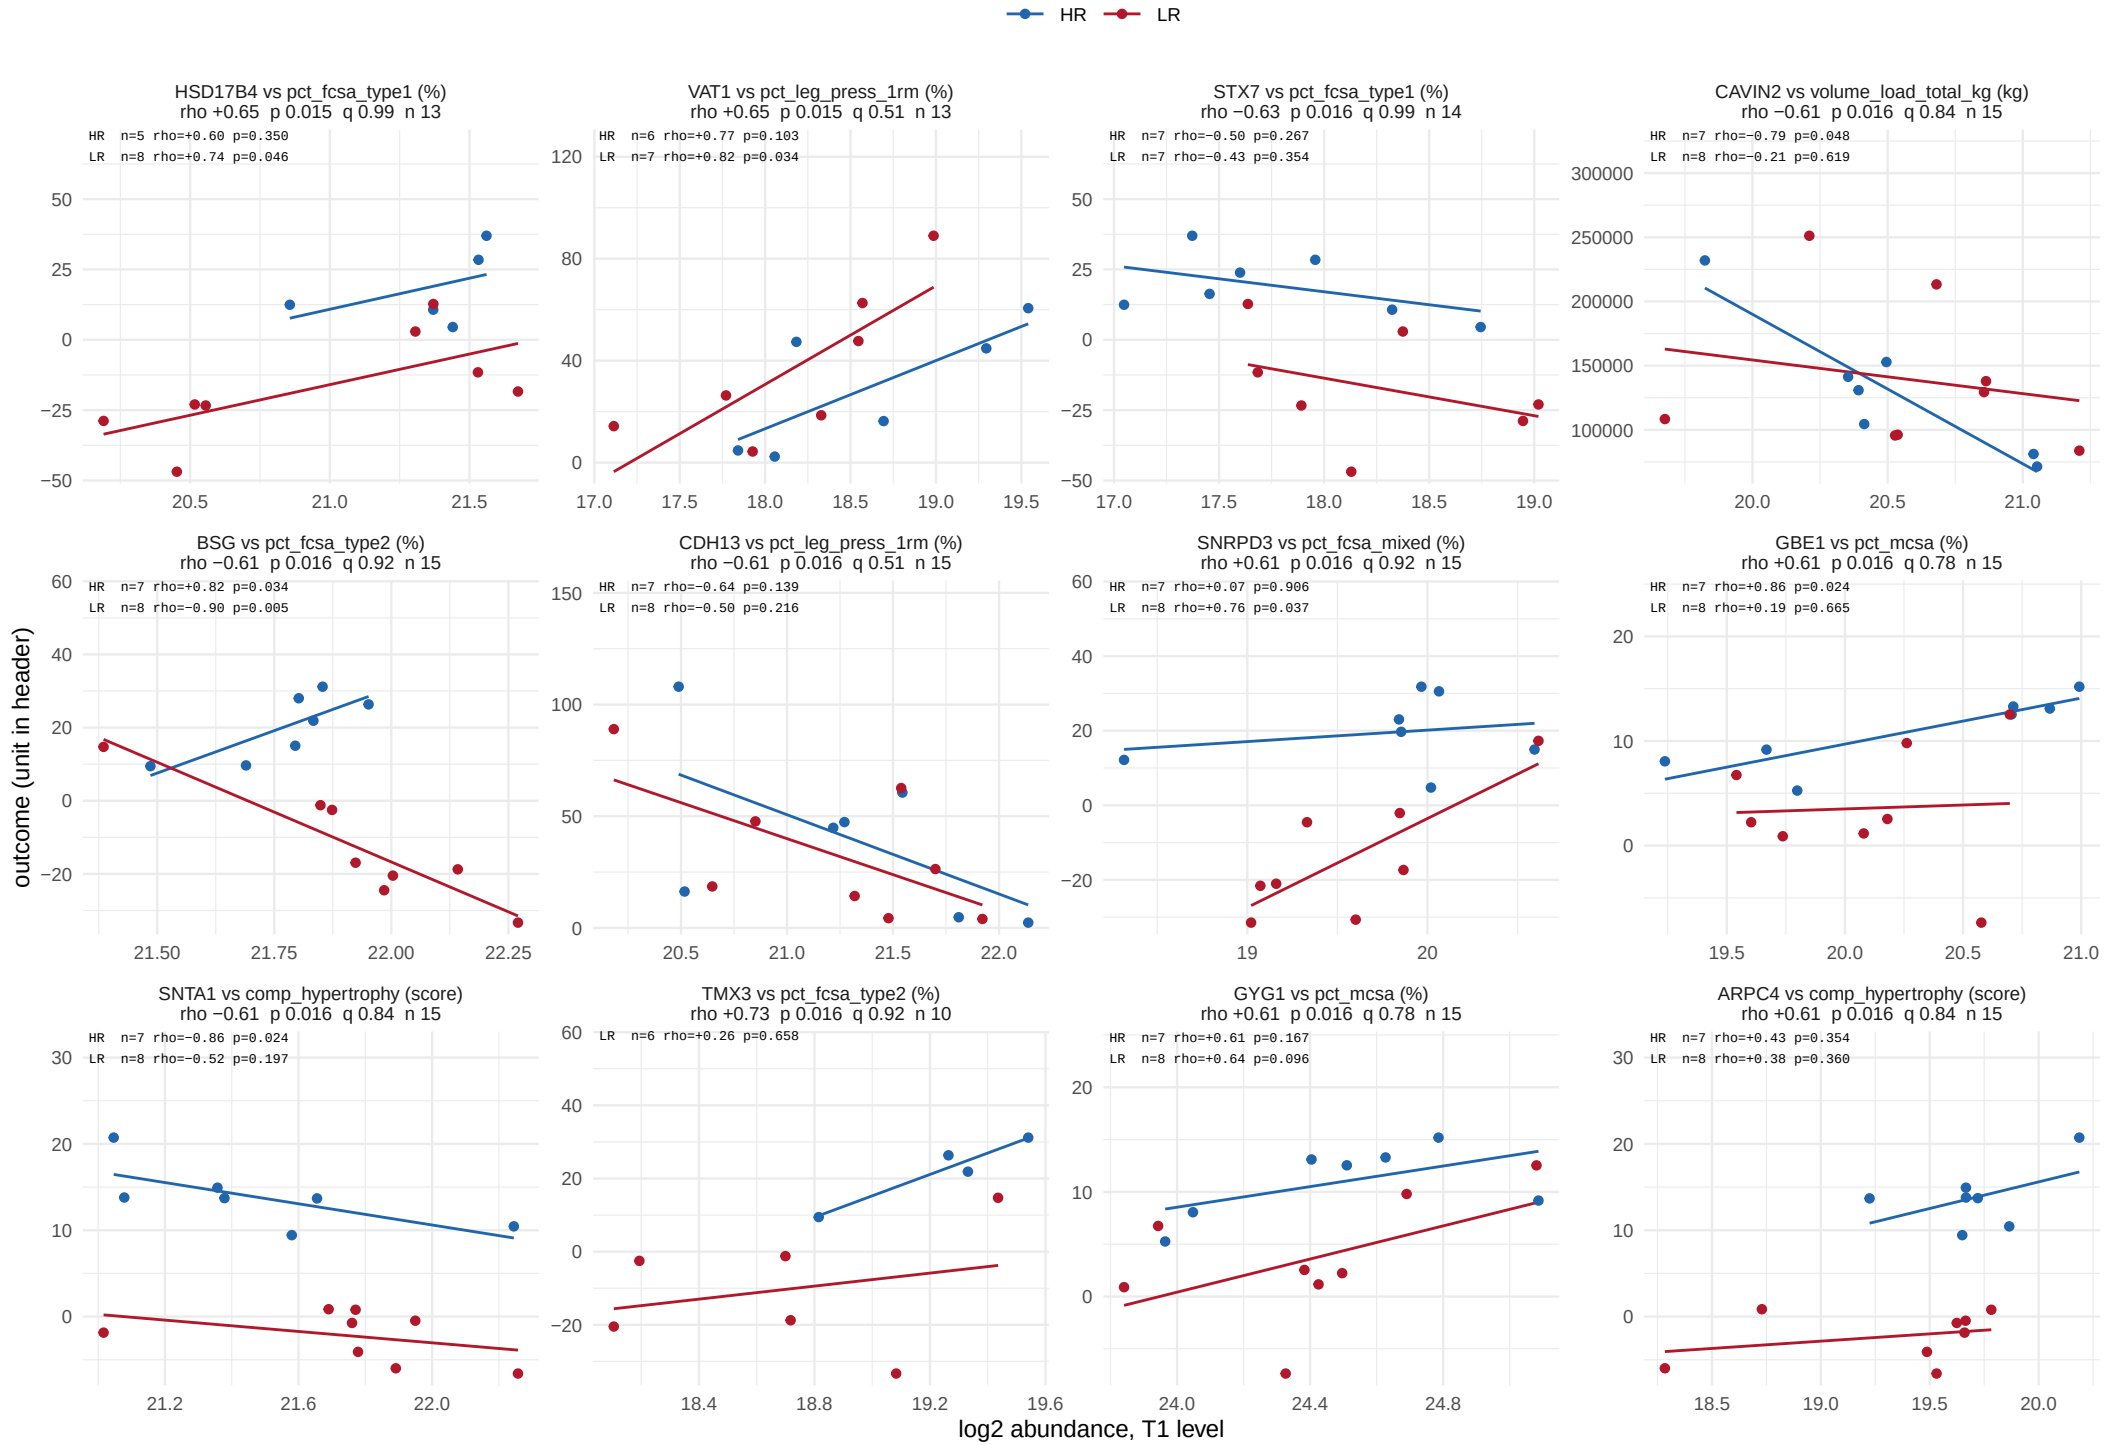

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


673 of 12553 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 19 of 57.

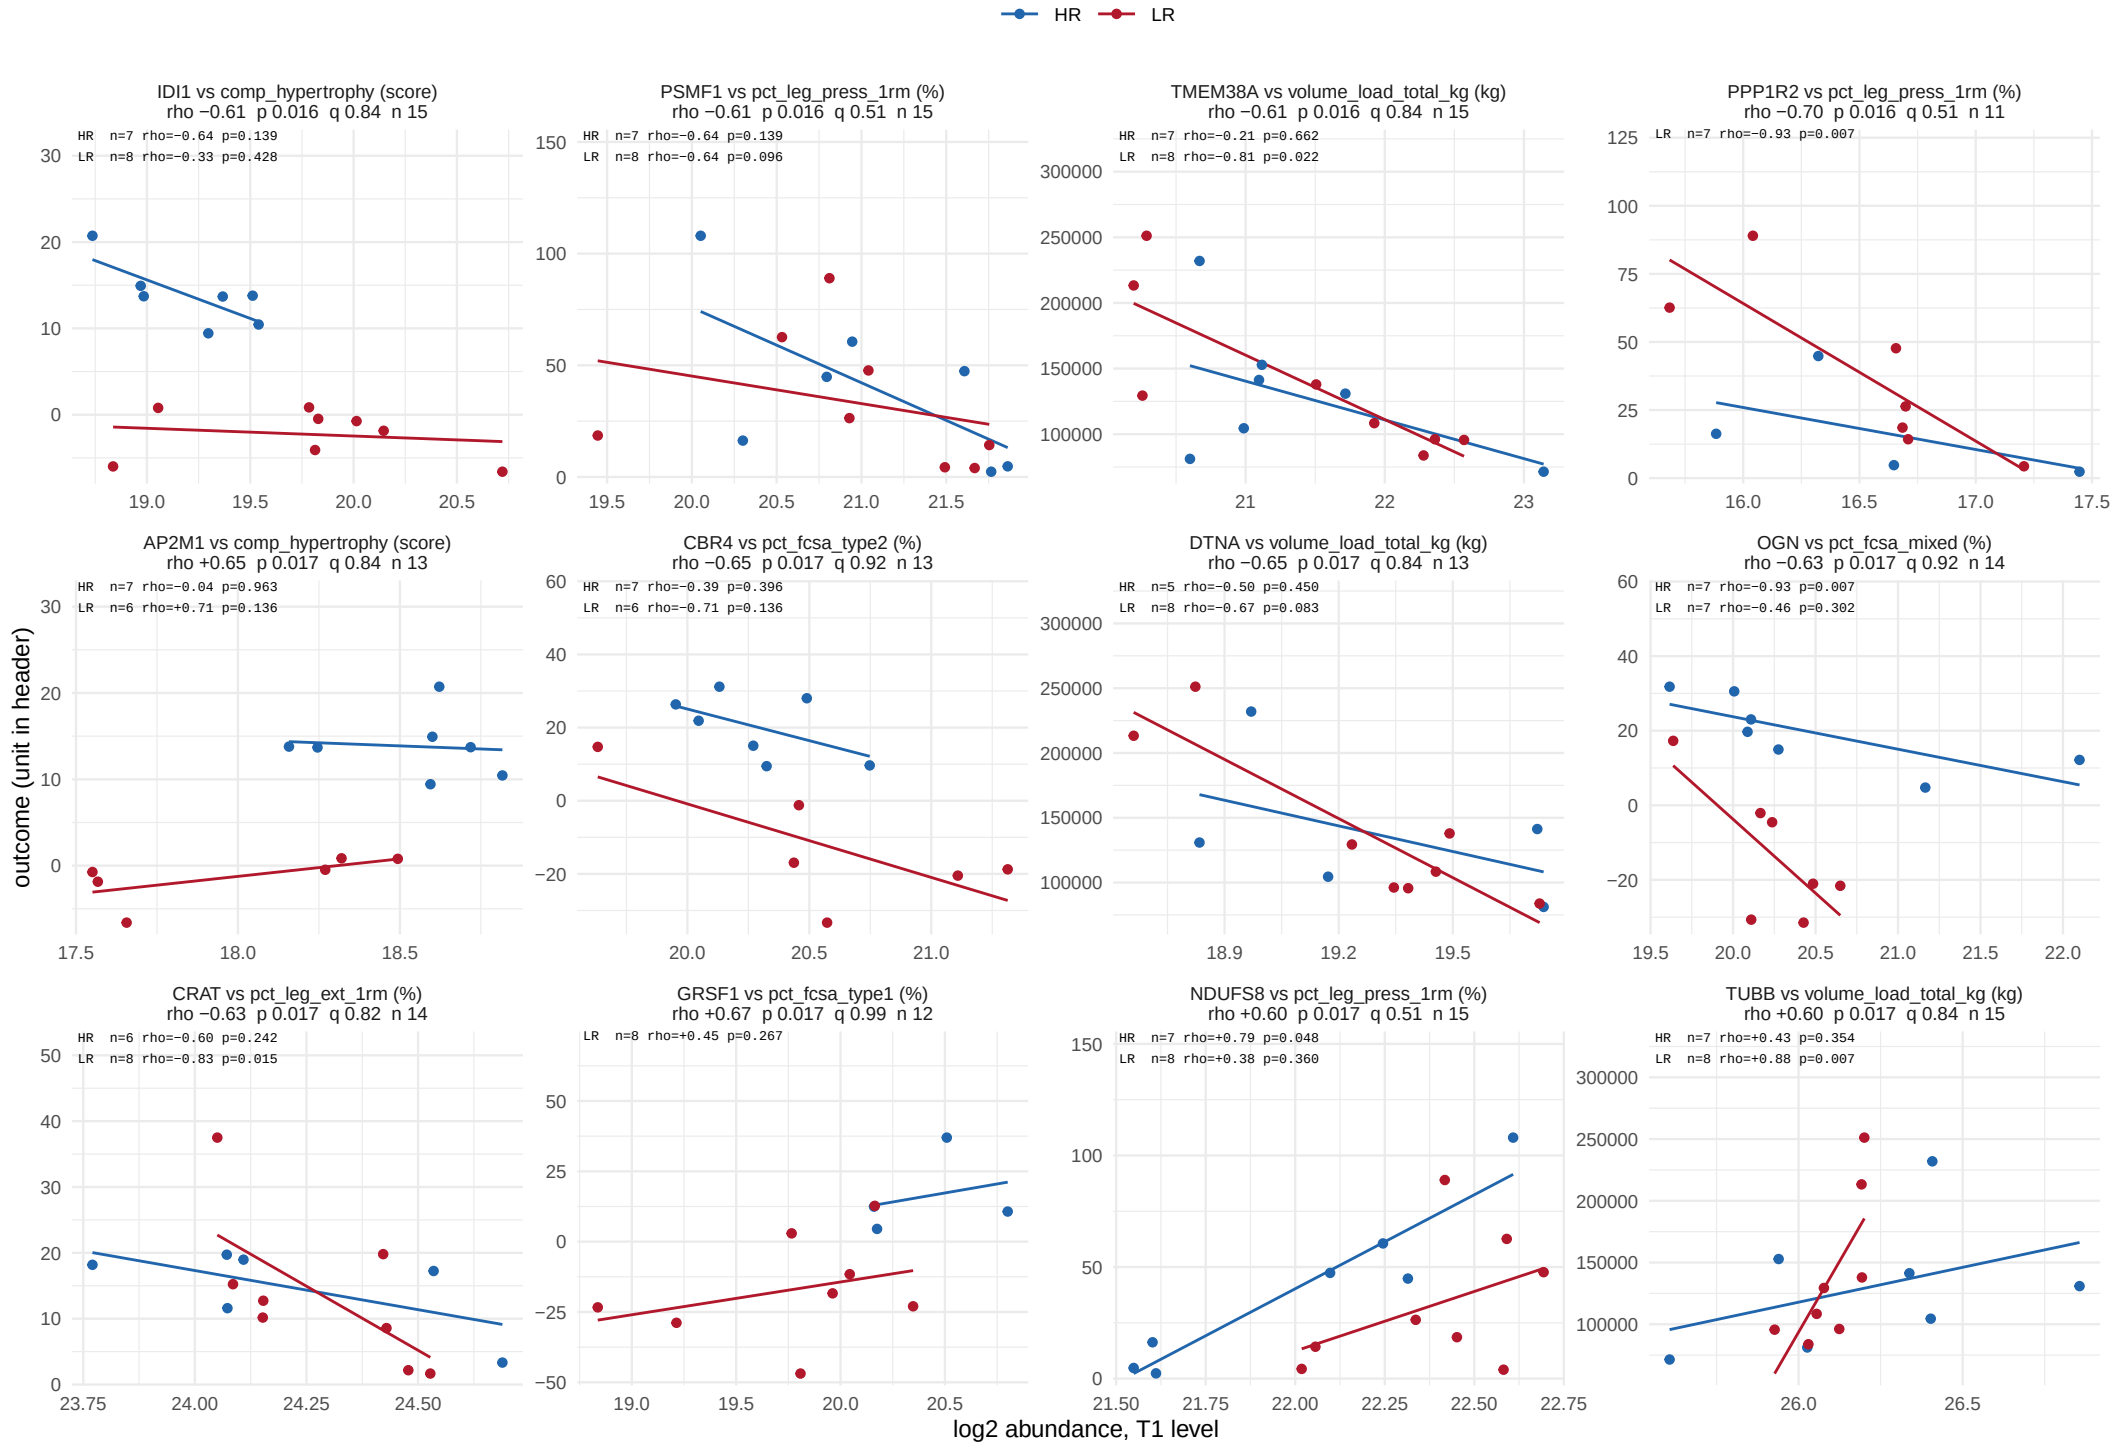

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


673 of 12553 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 20 of 57.

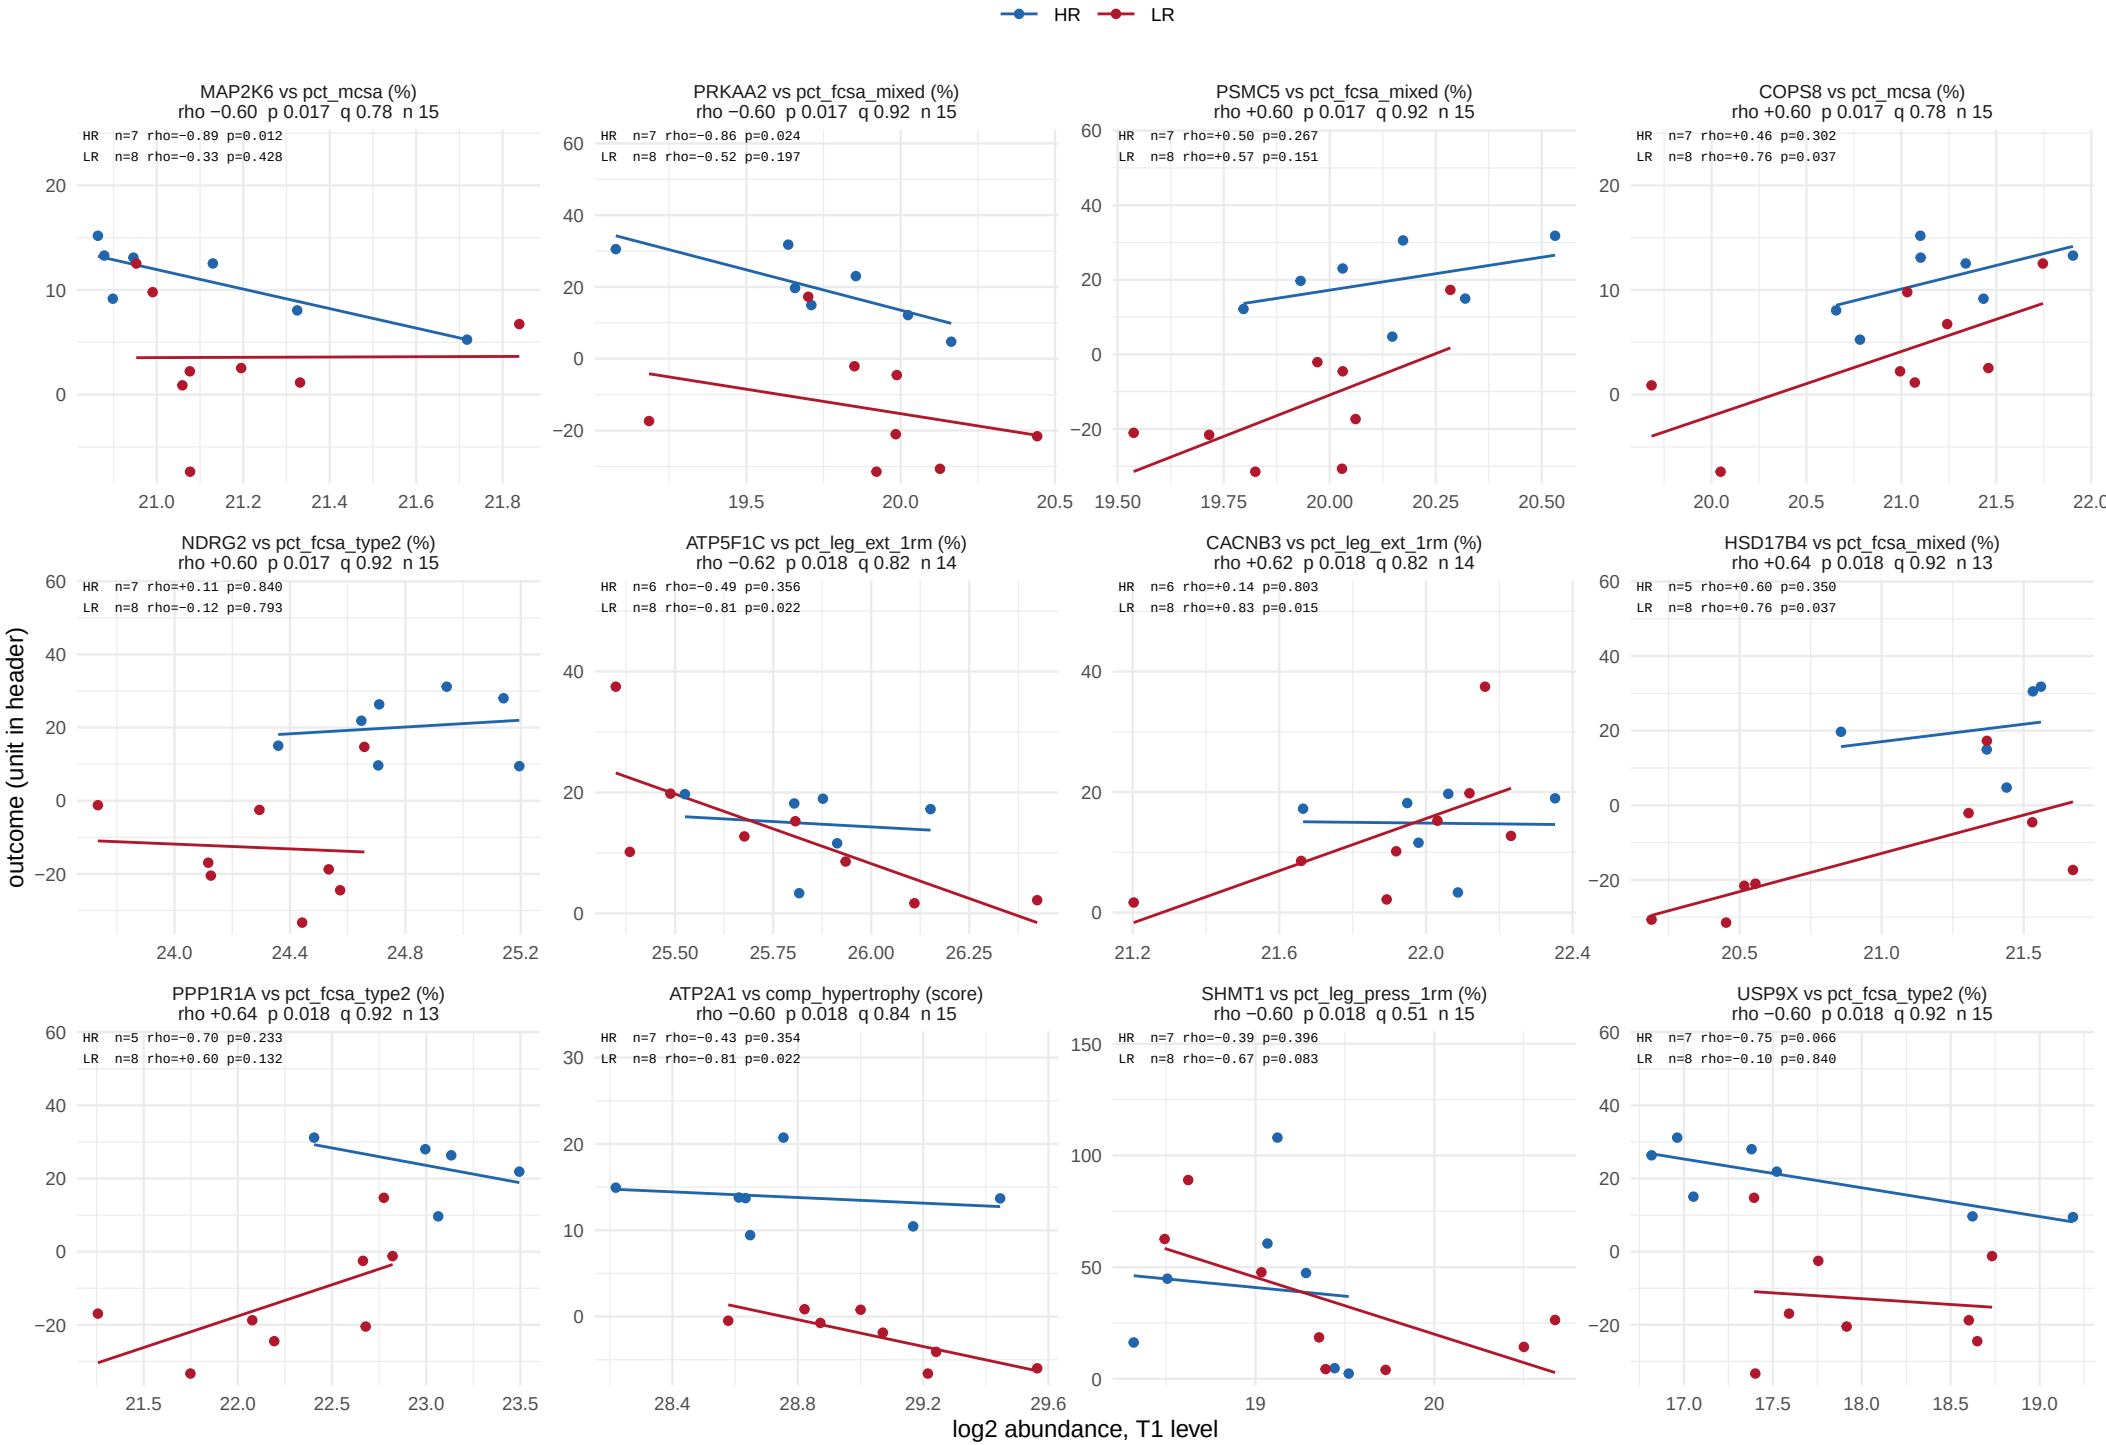

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


673 of 12553 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 21 of 57.

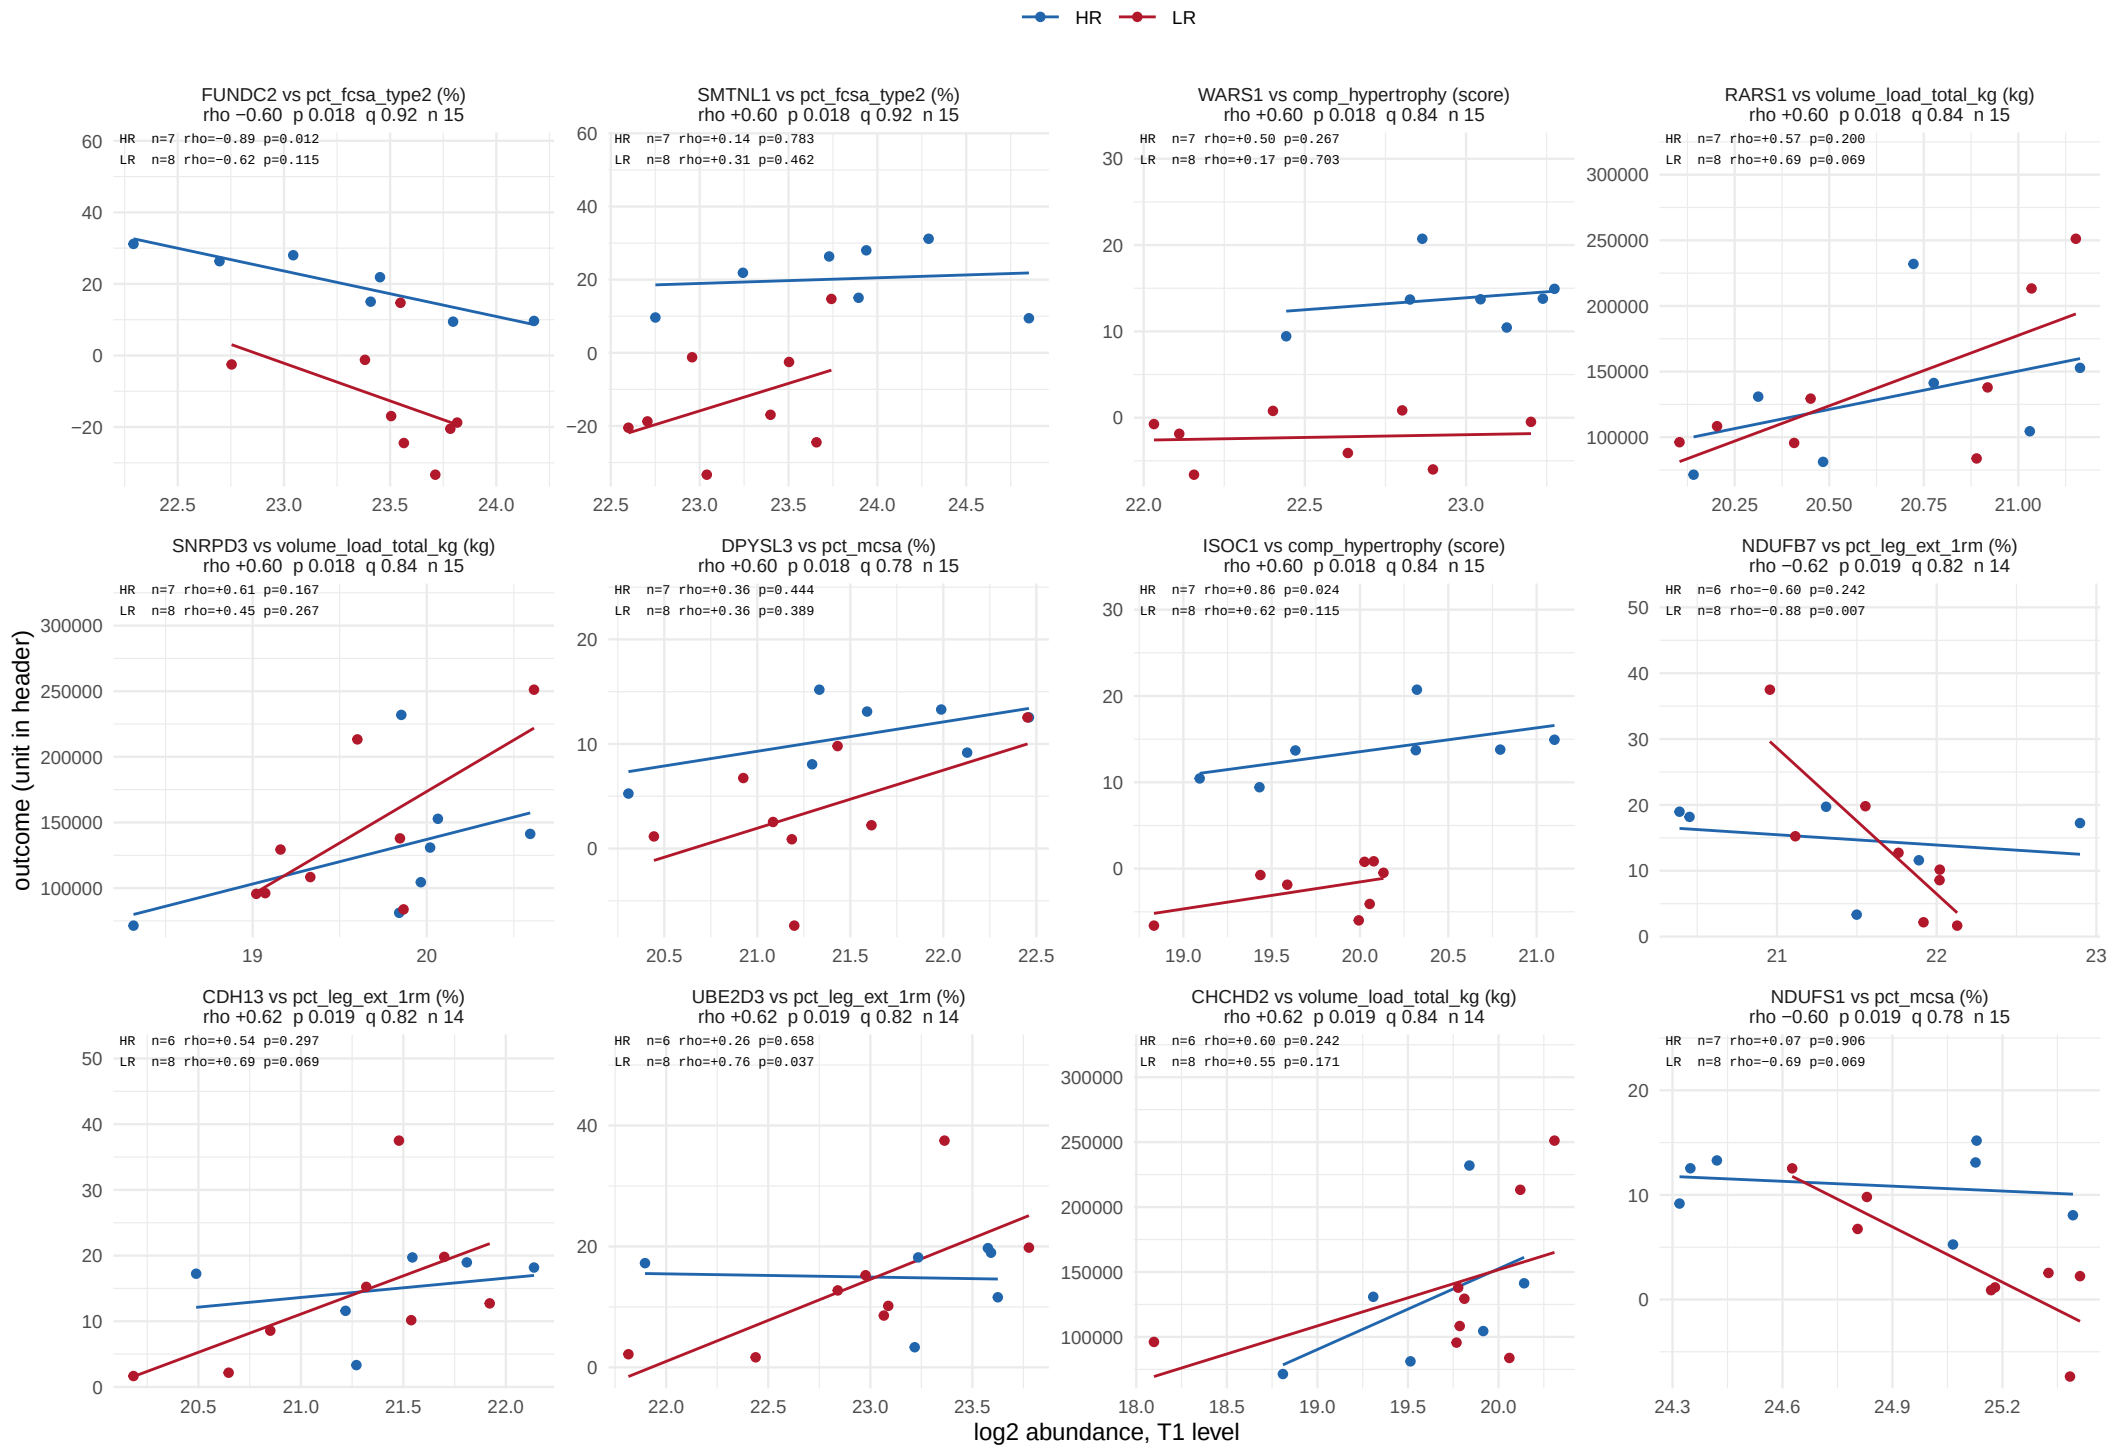

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window

673 of 12553 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 22 of 57.

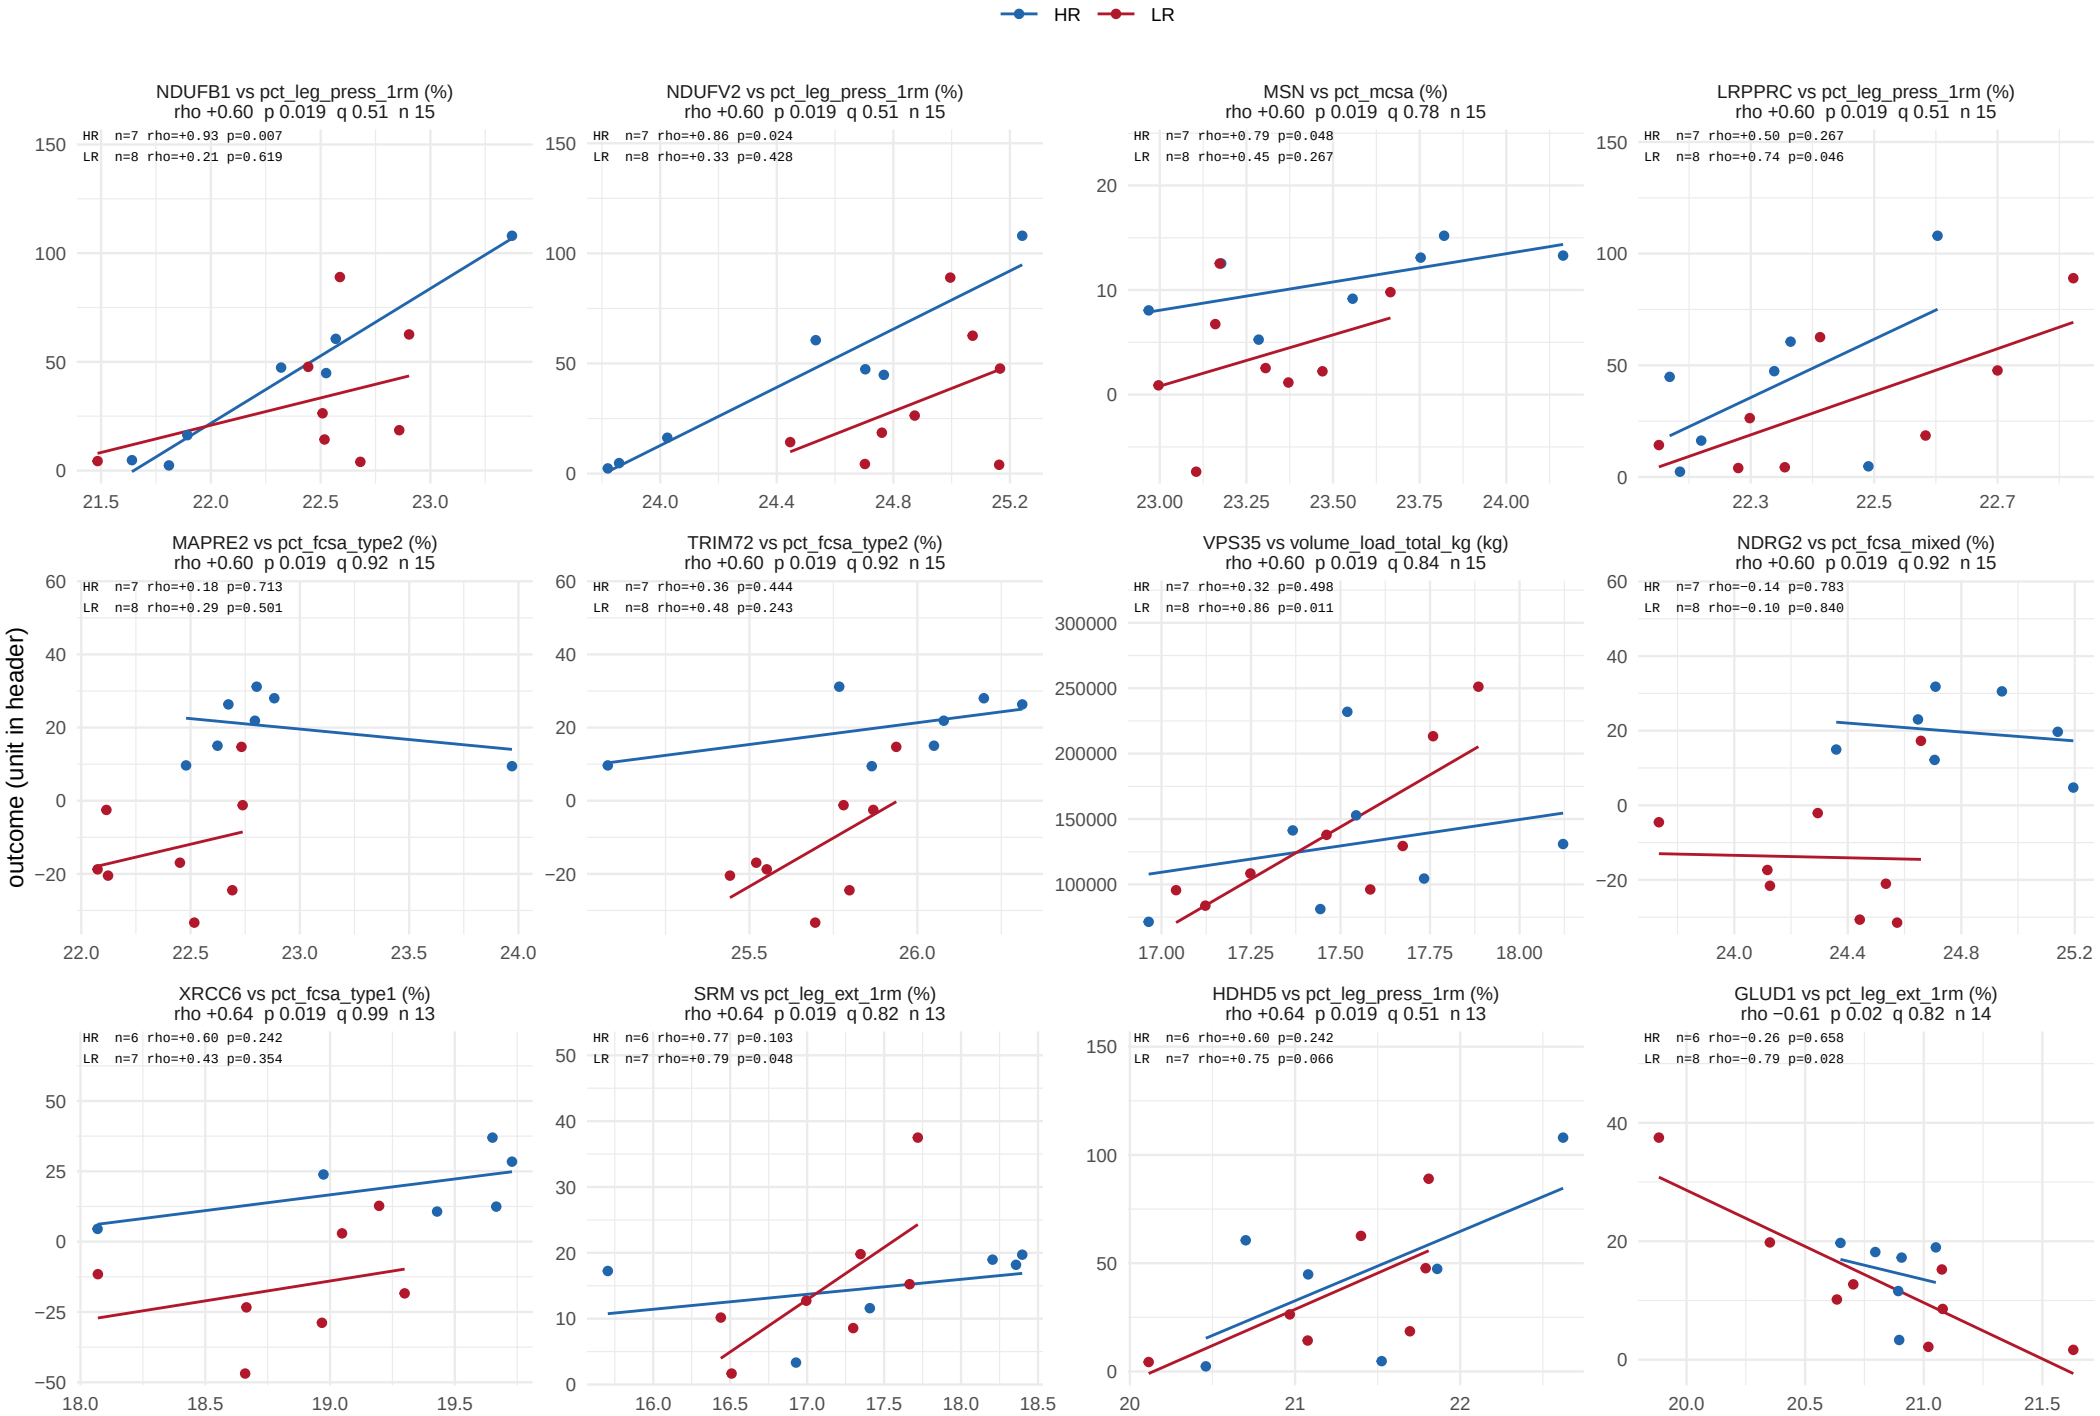

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


673 of 12553 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 23 of 57.



One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


673 of 12553 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 24 of 57.

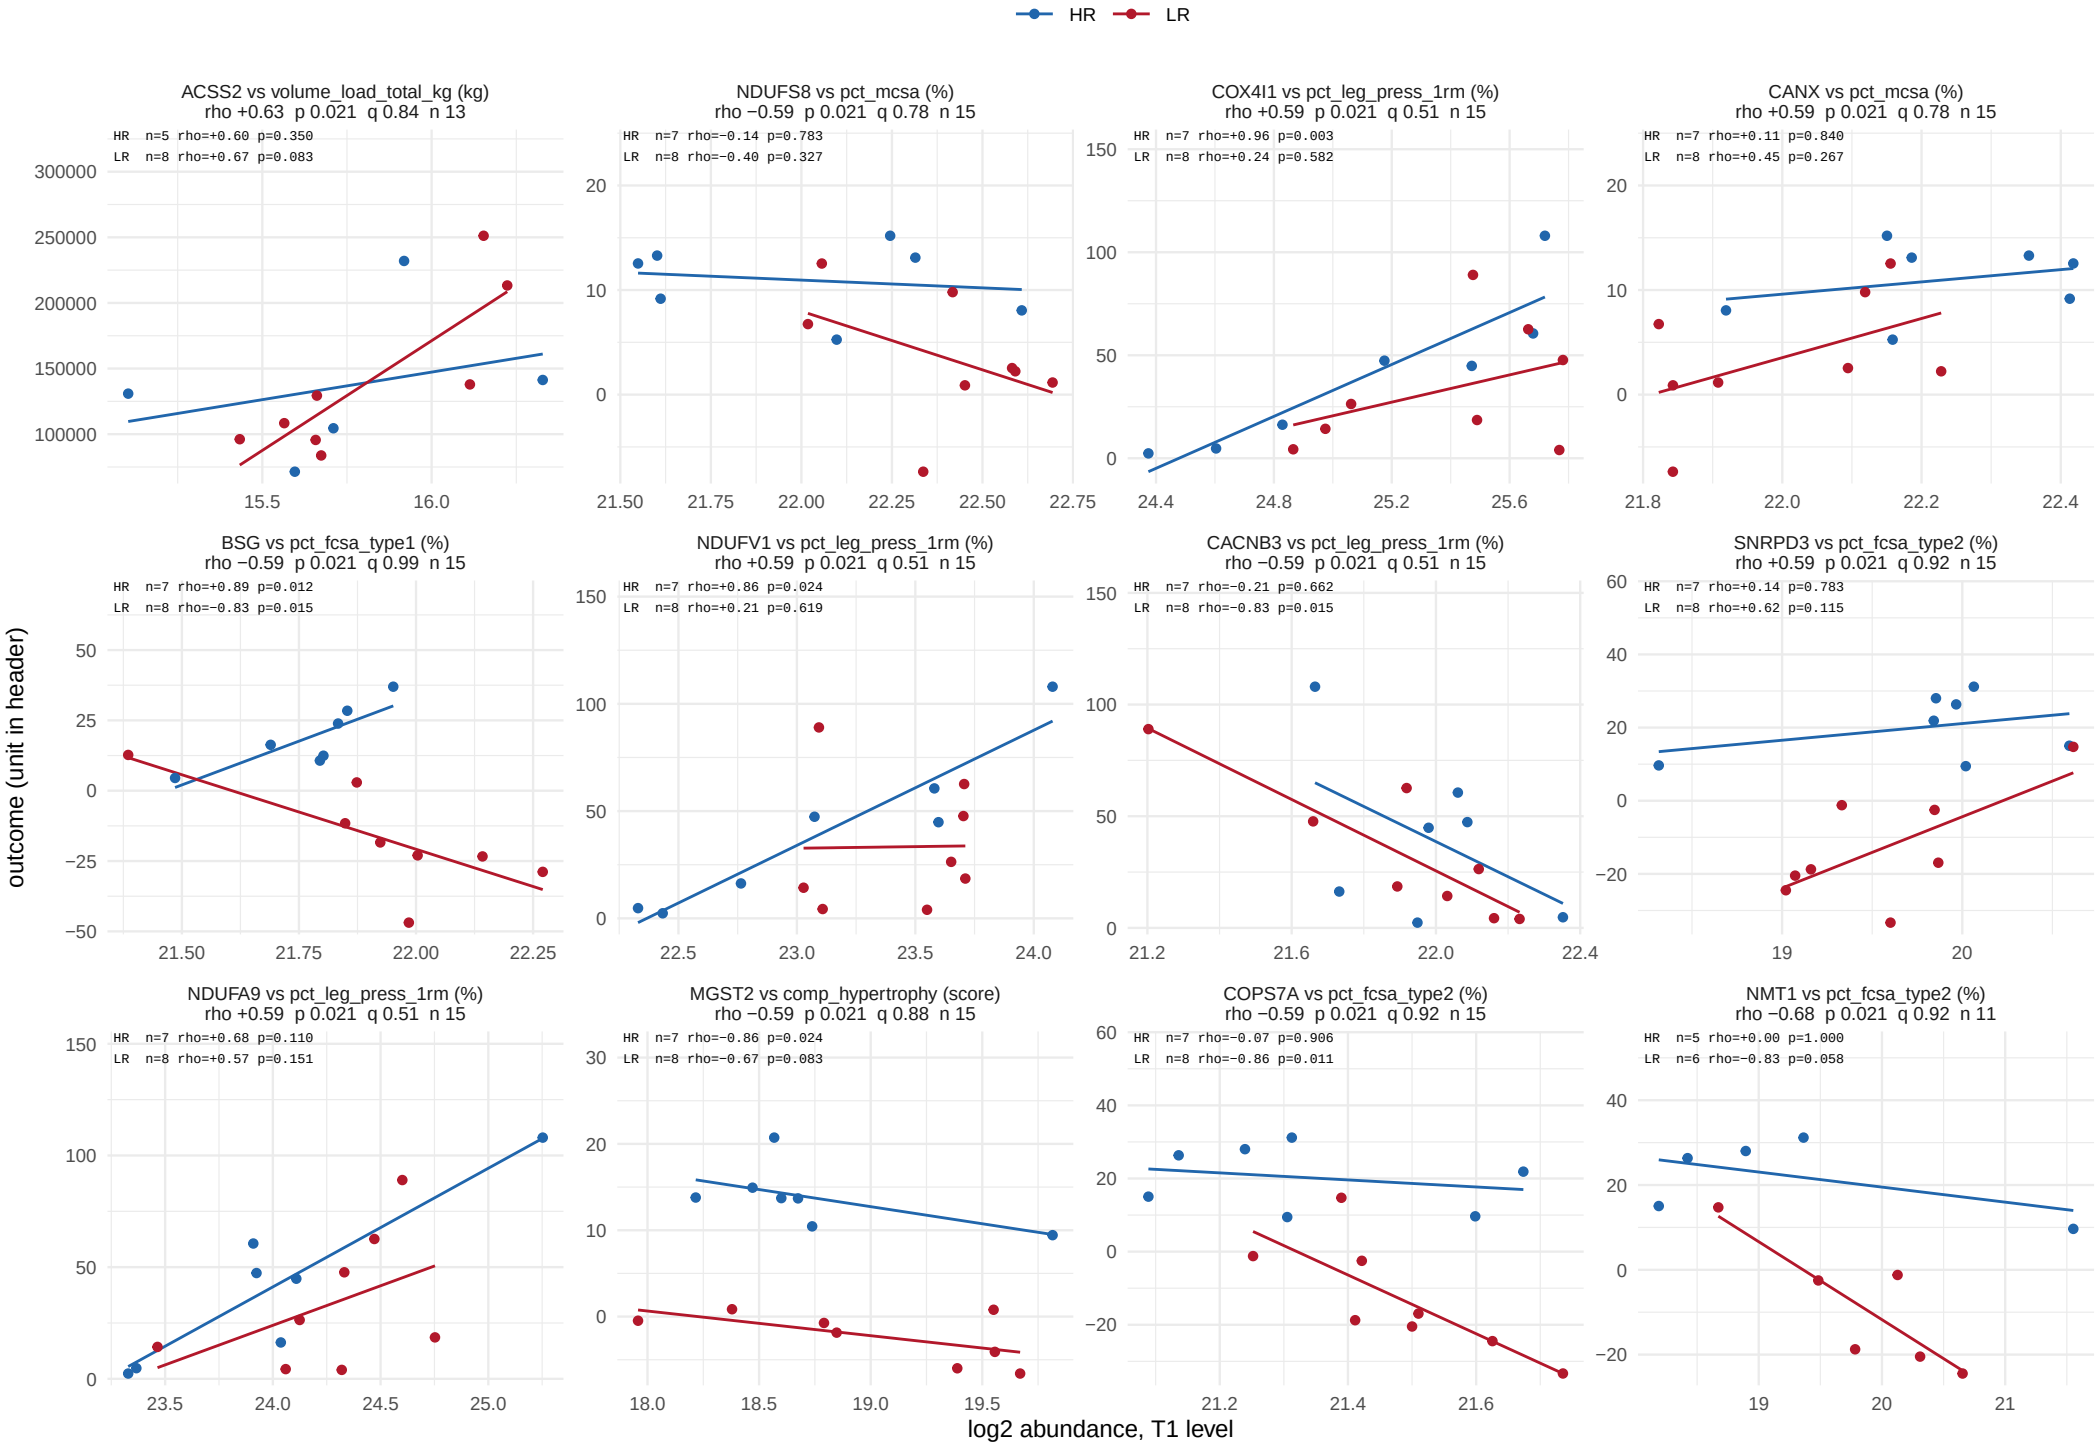

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


673 of 12553 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 25 of 57.

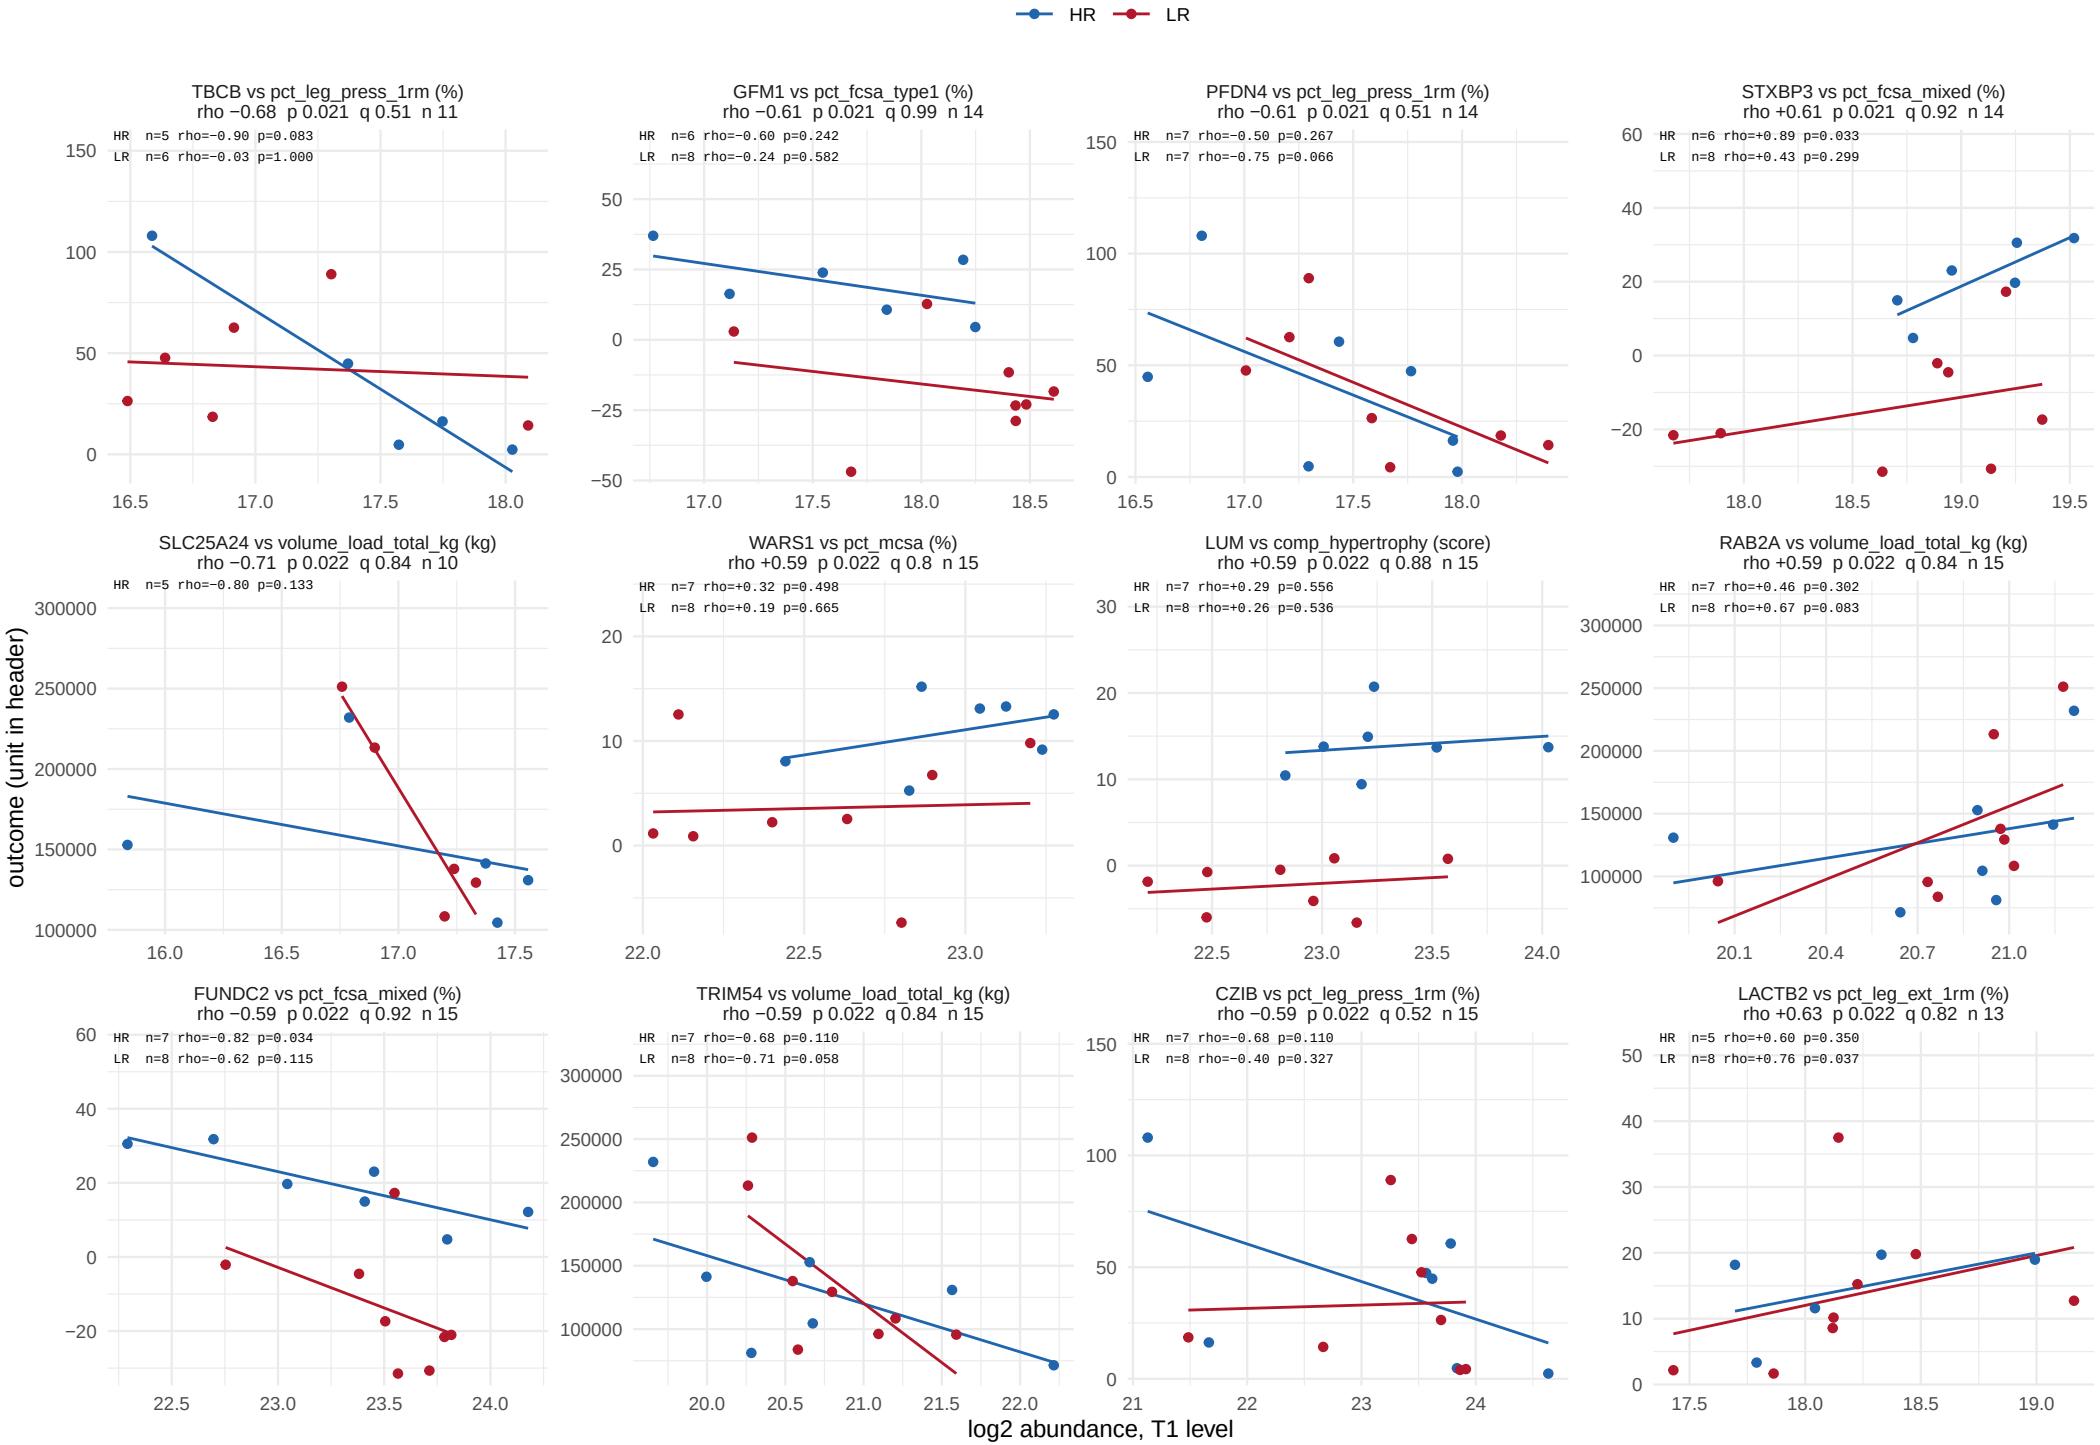

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


673 of 12553 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 26 of 57.

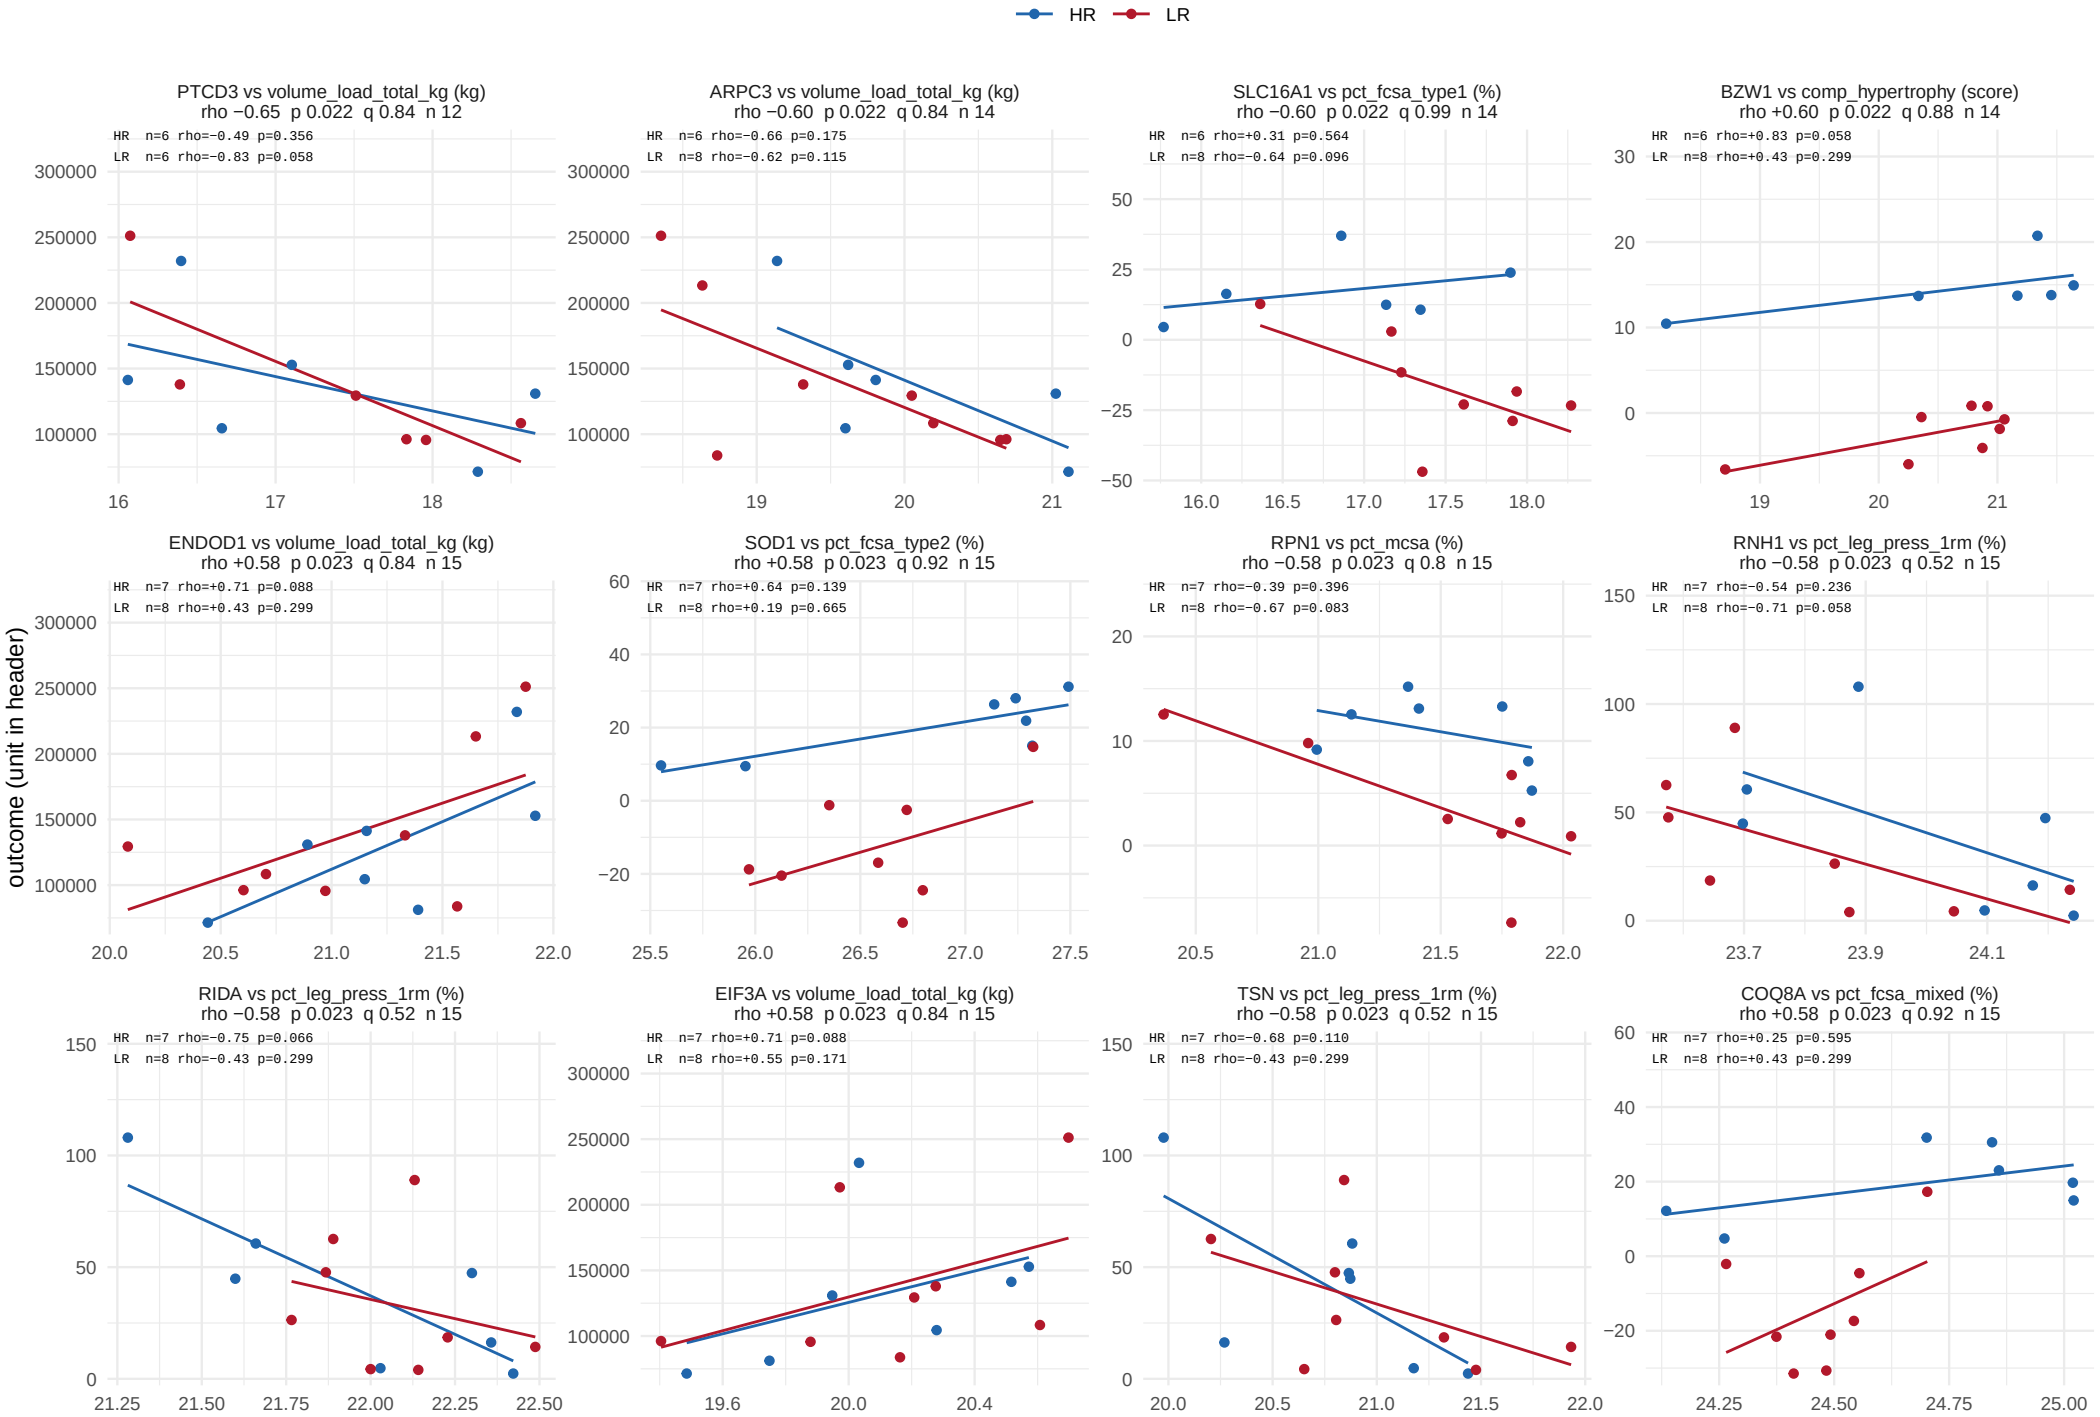

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


673 of 12553 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 27 of 57.

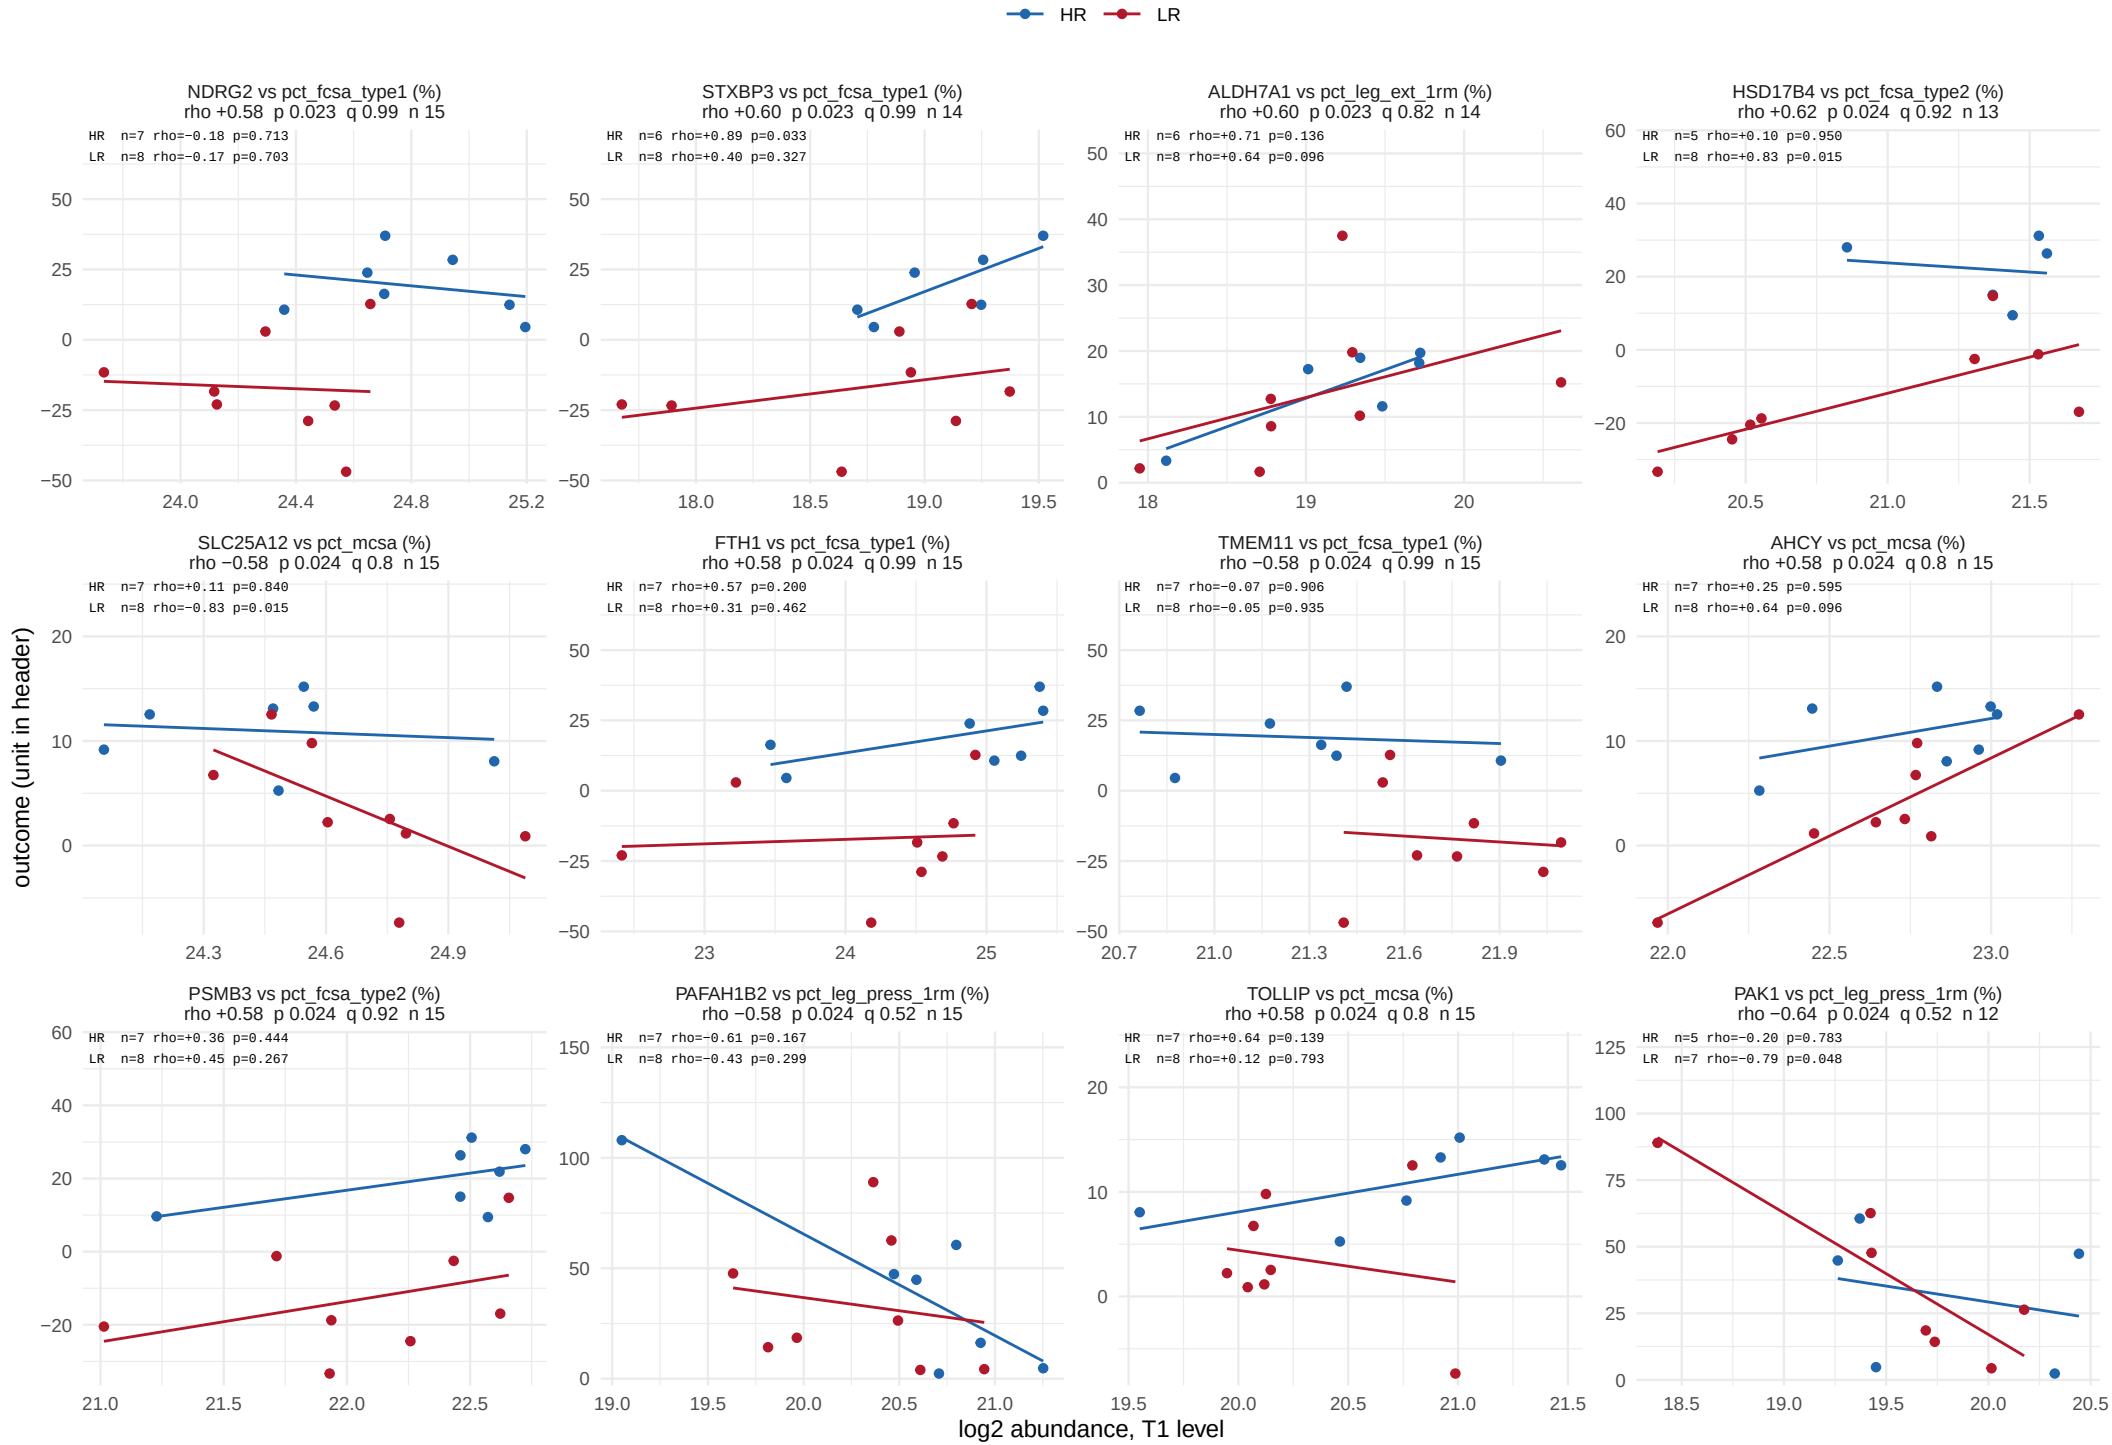

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


673 of 12553 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 28 of 57.

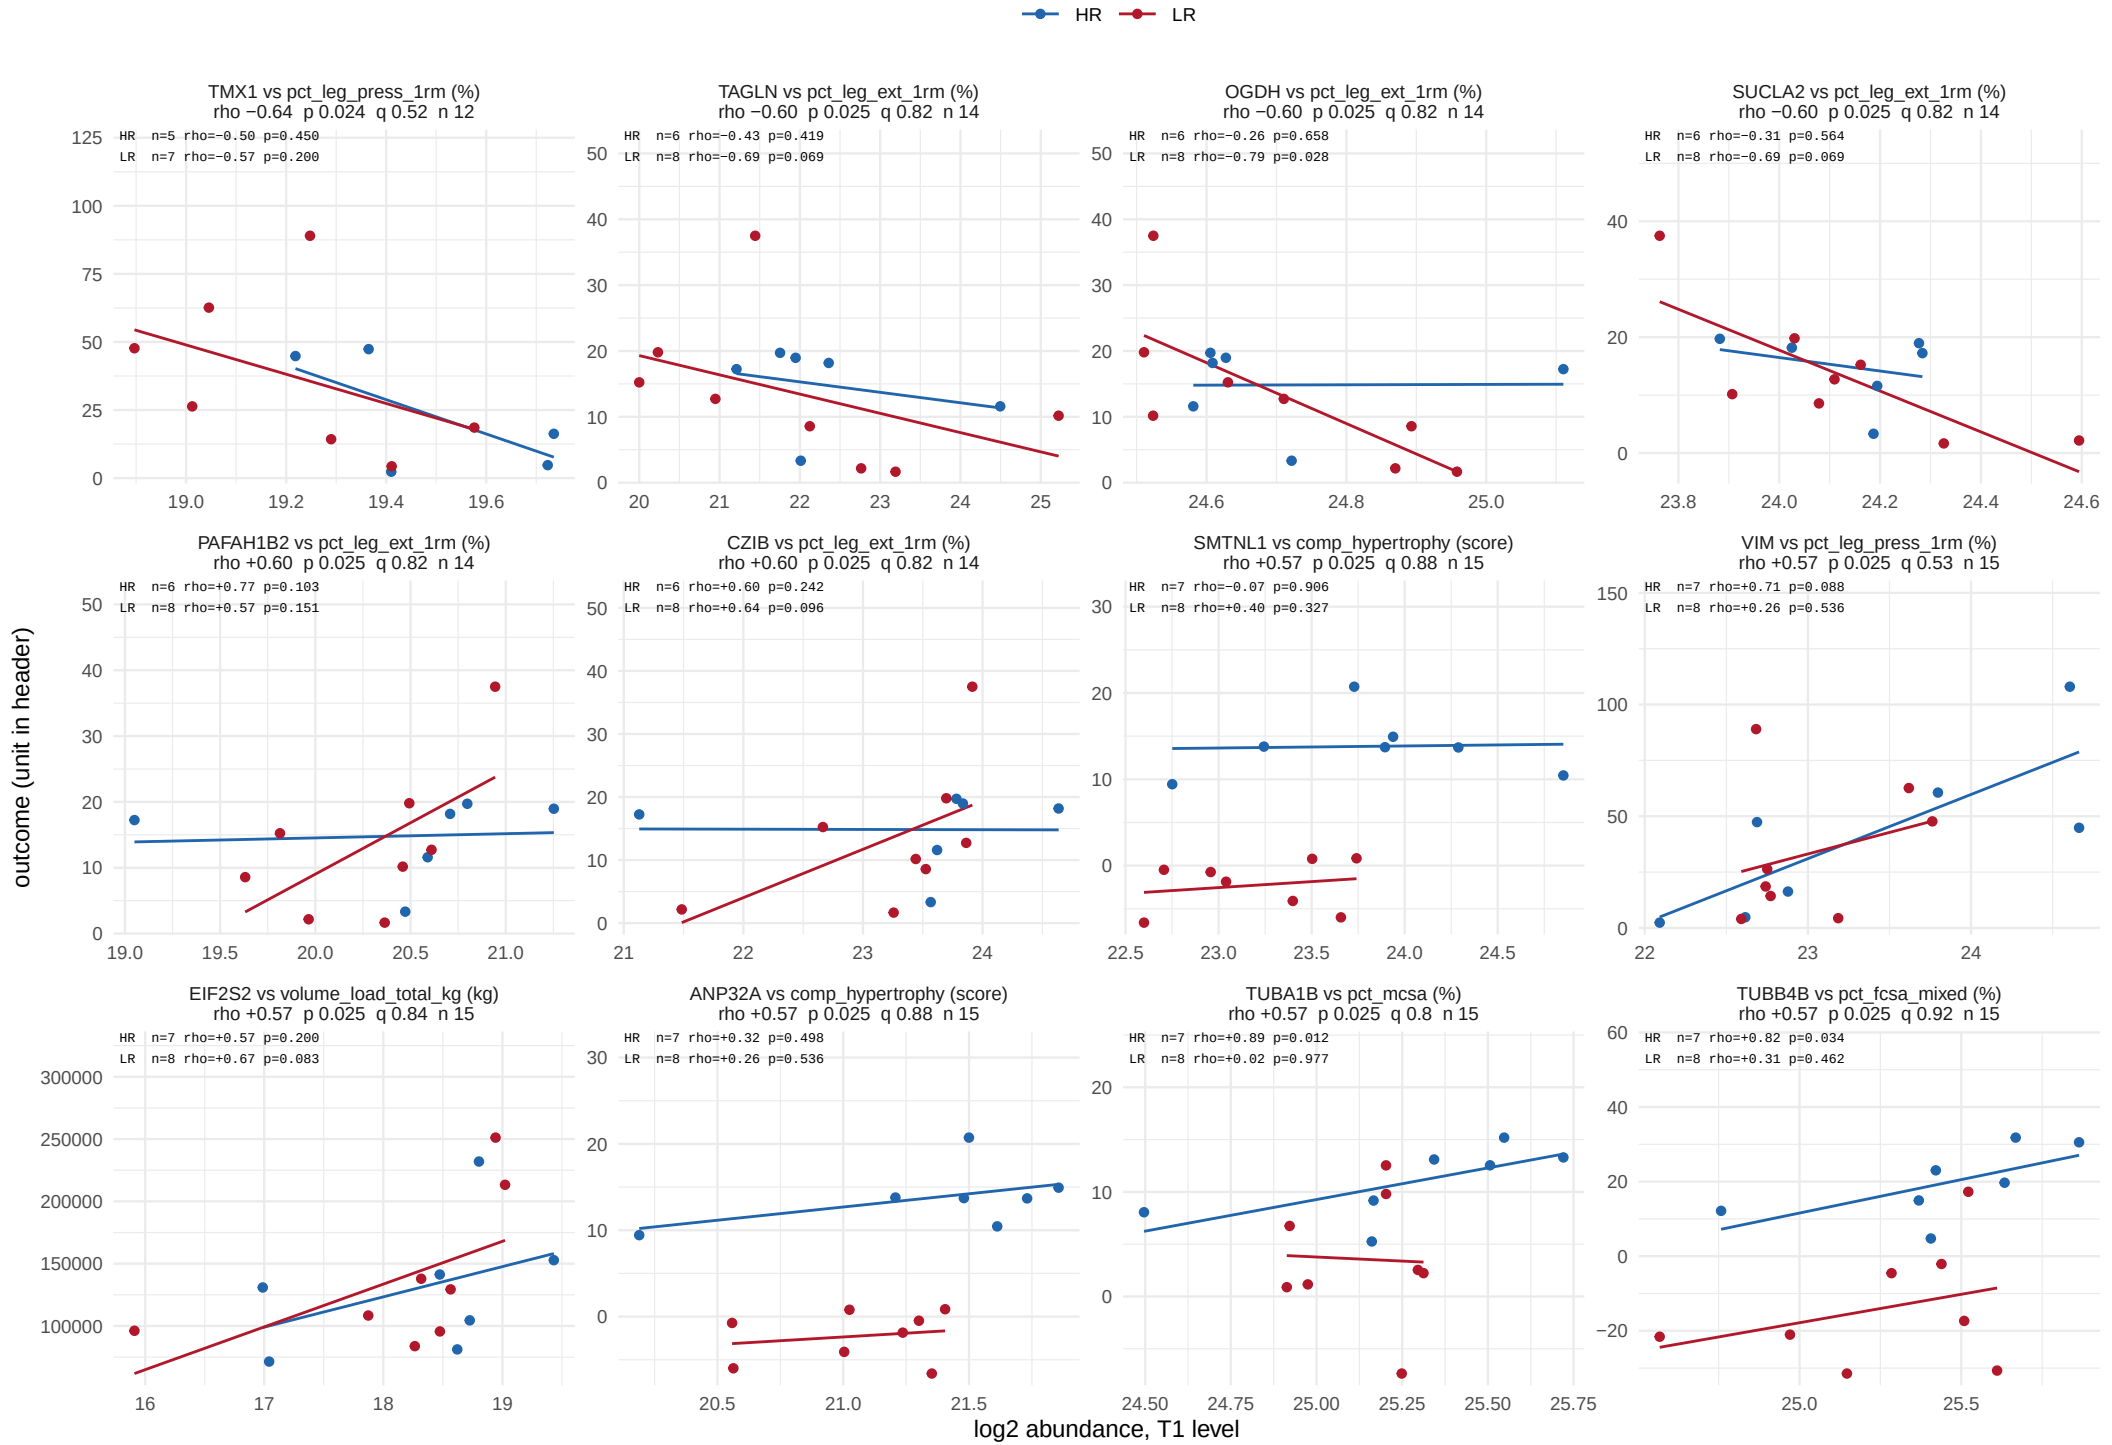

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


673 of 12553 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 29 of 57.

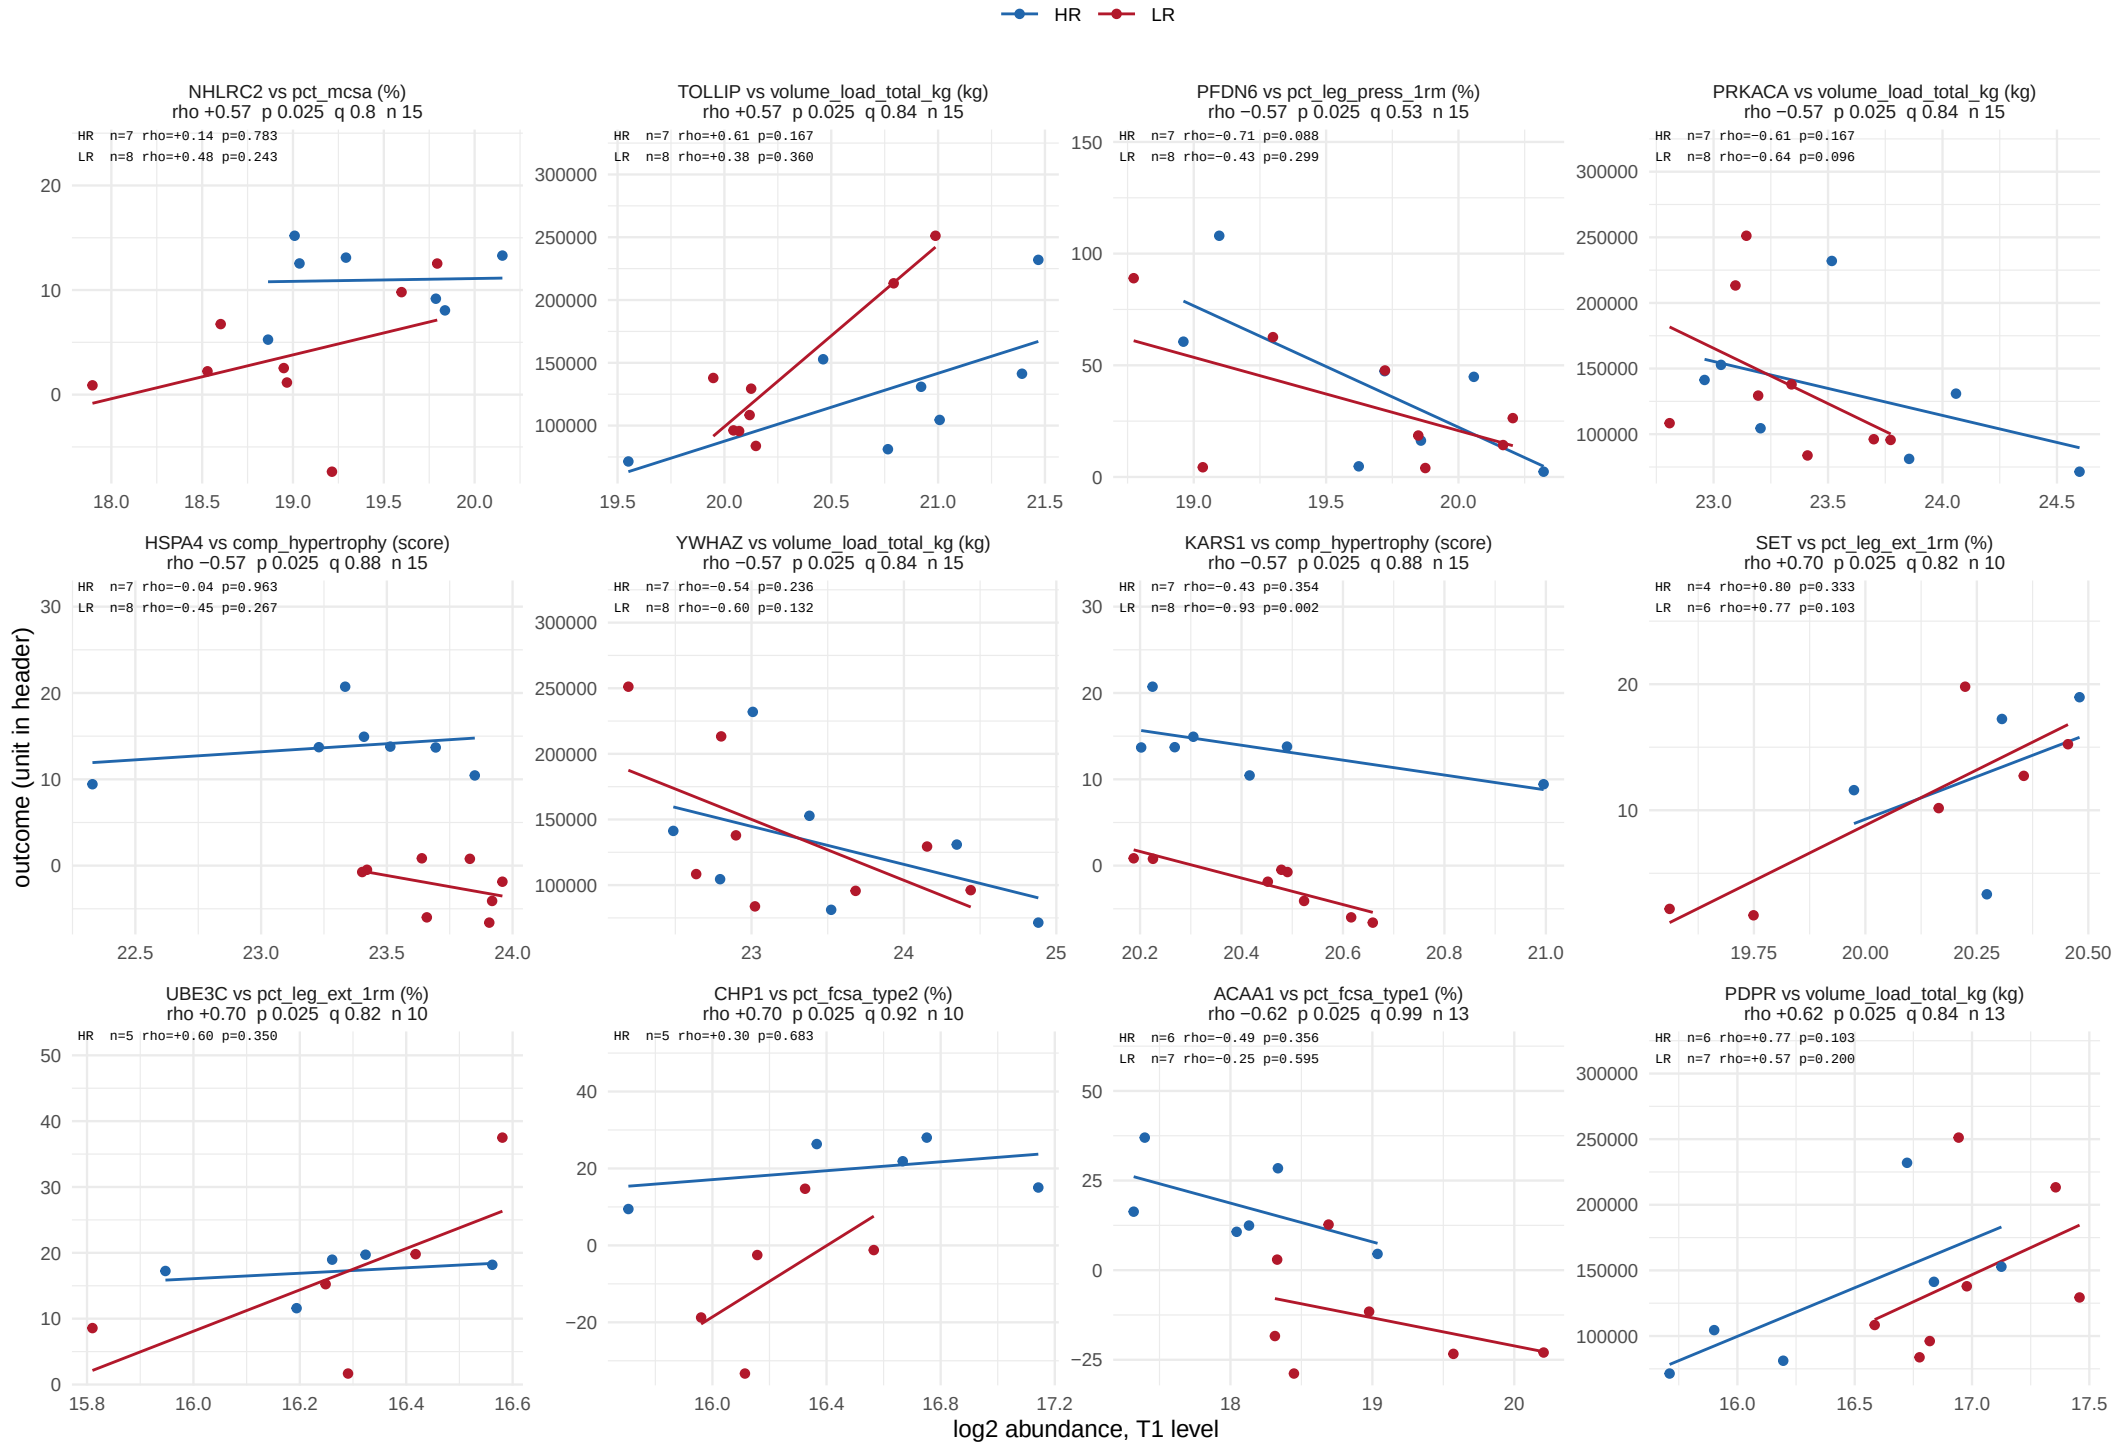

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


673 of 12553 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 30 of 57.

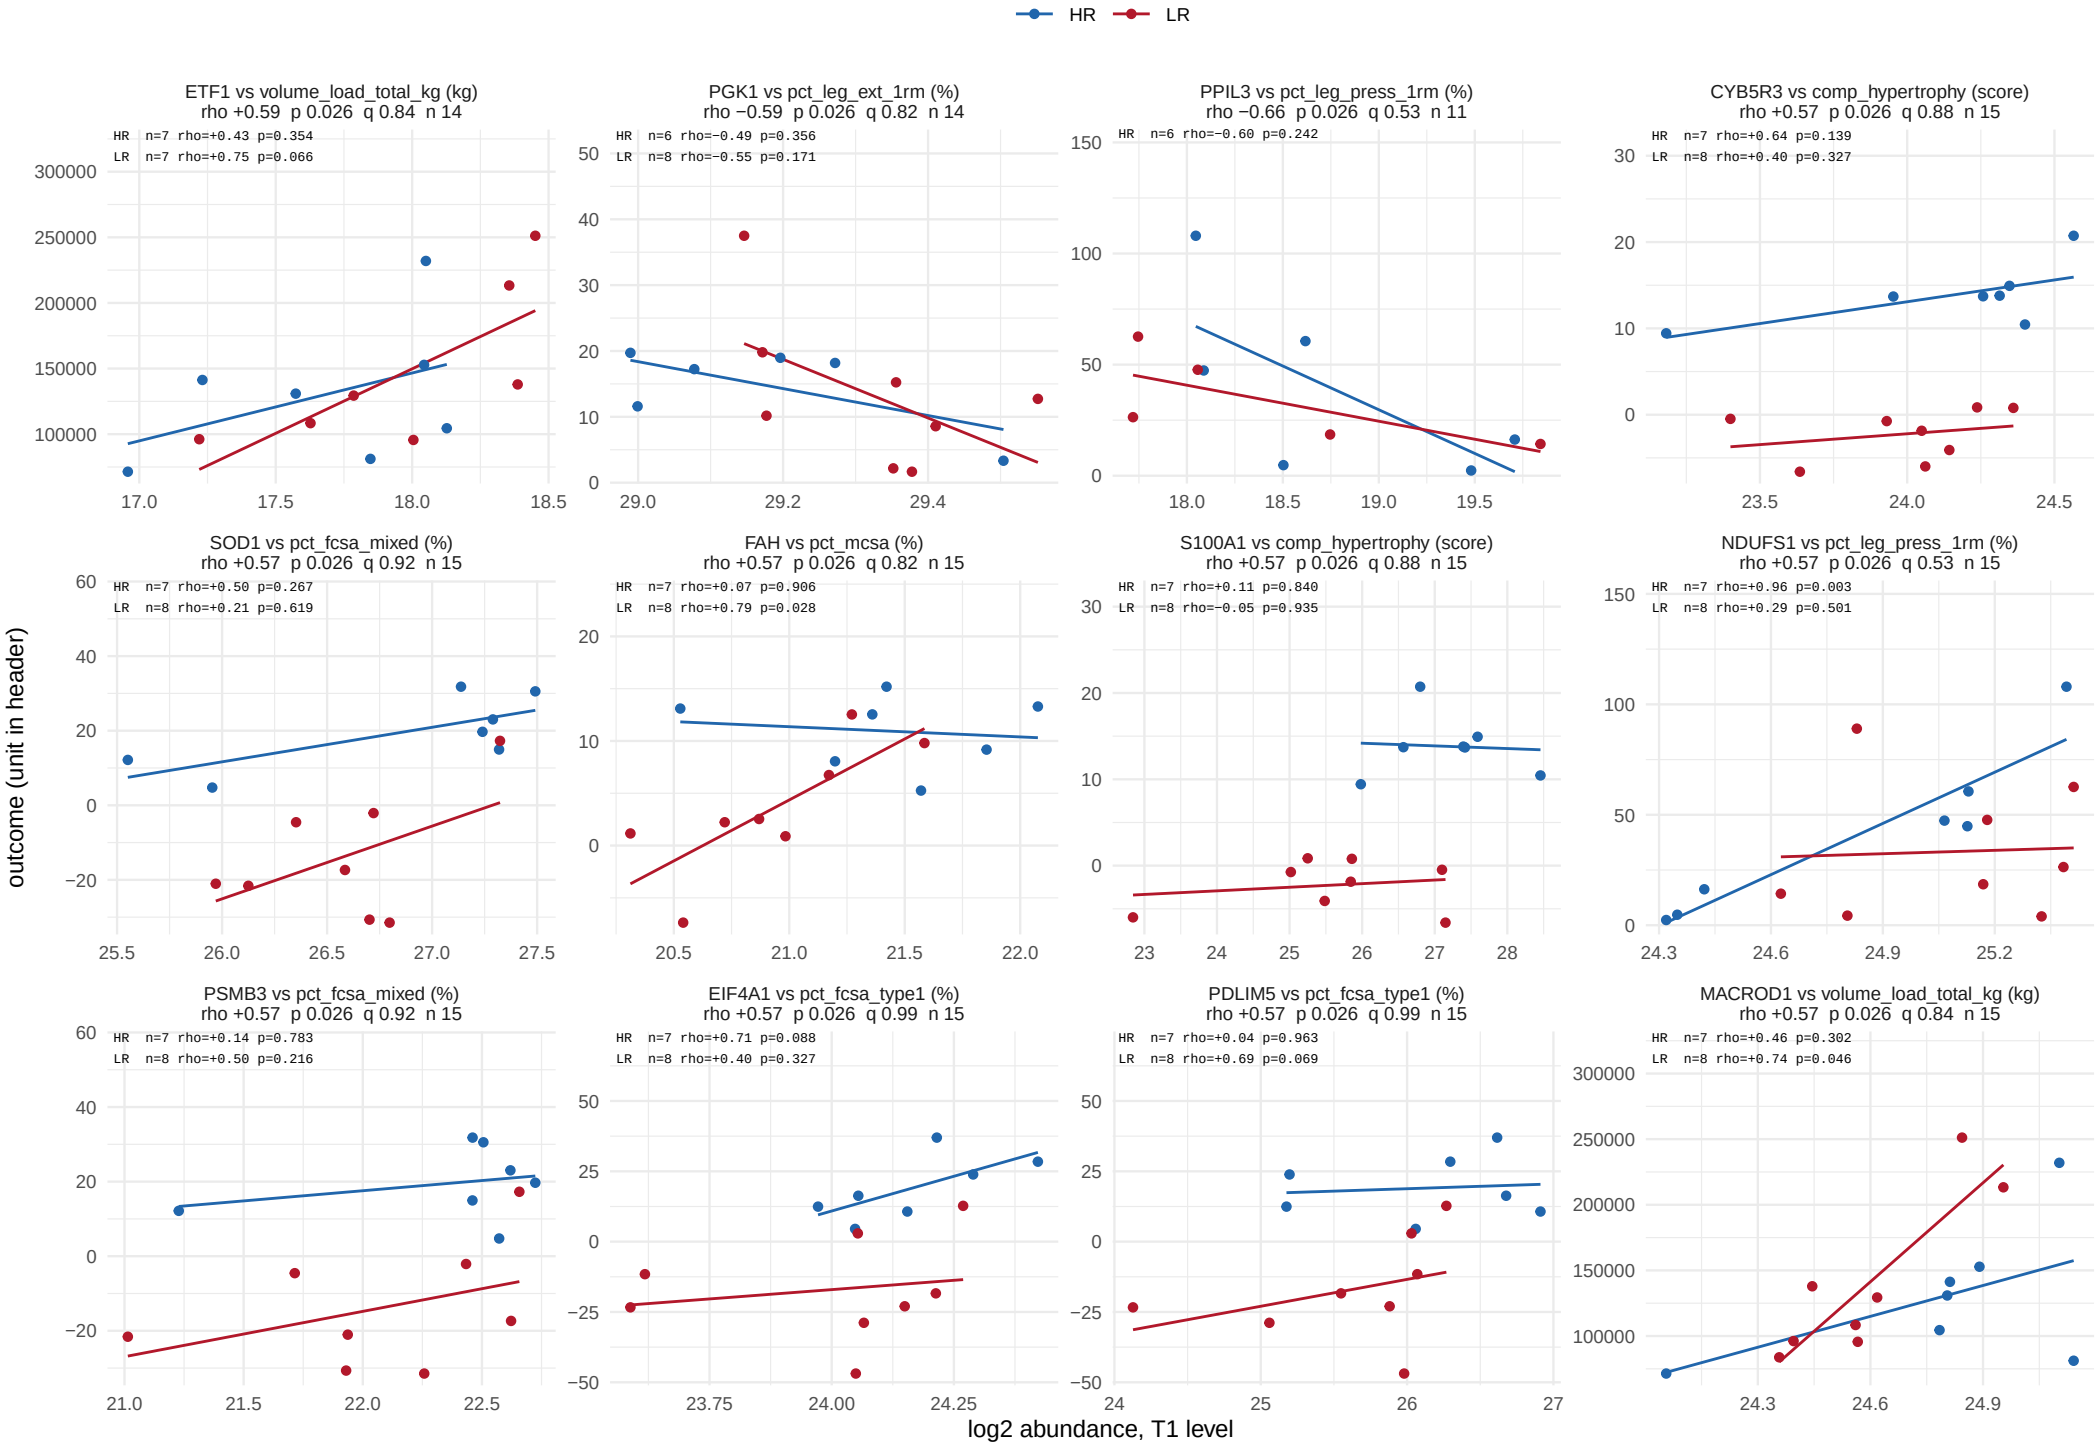

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


673 of 12553 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 31 of 57.

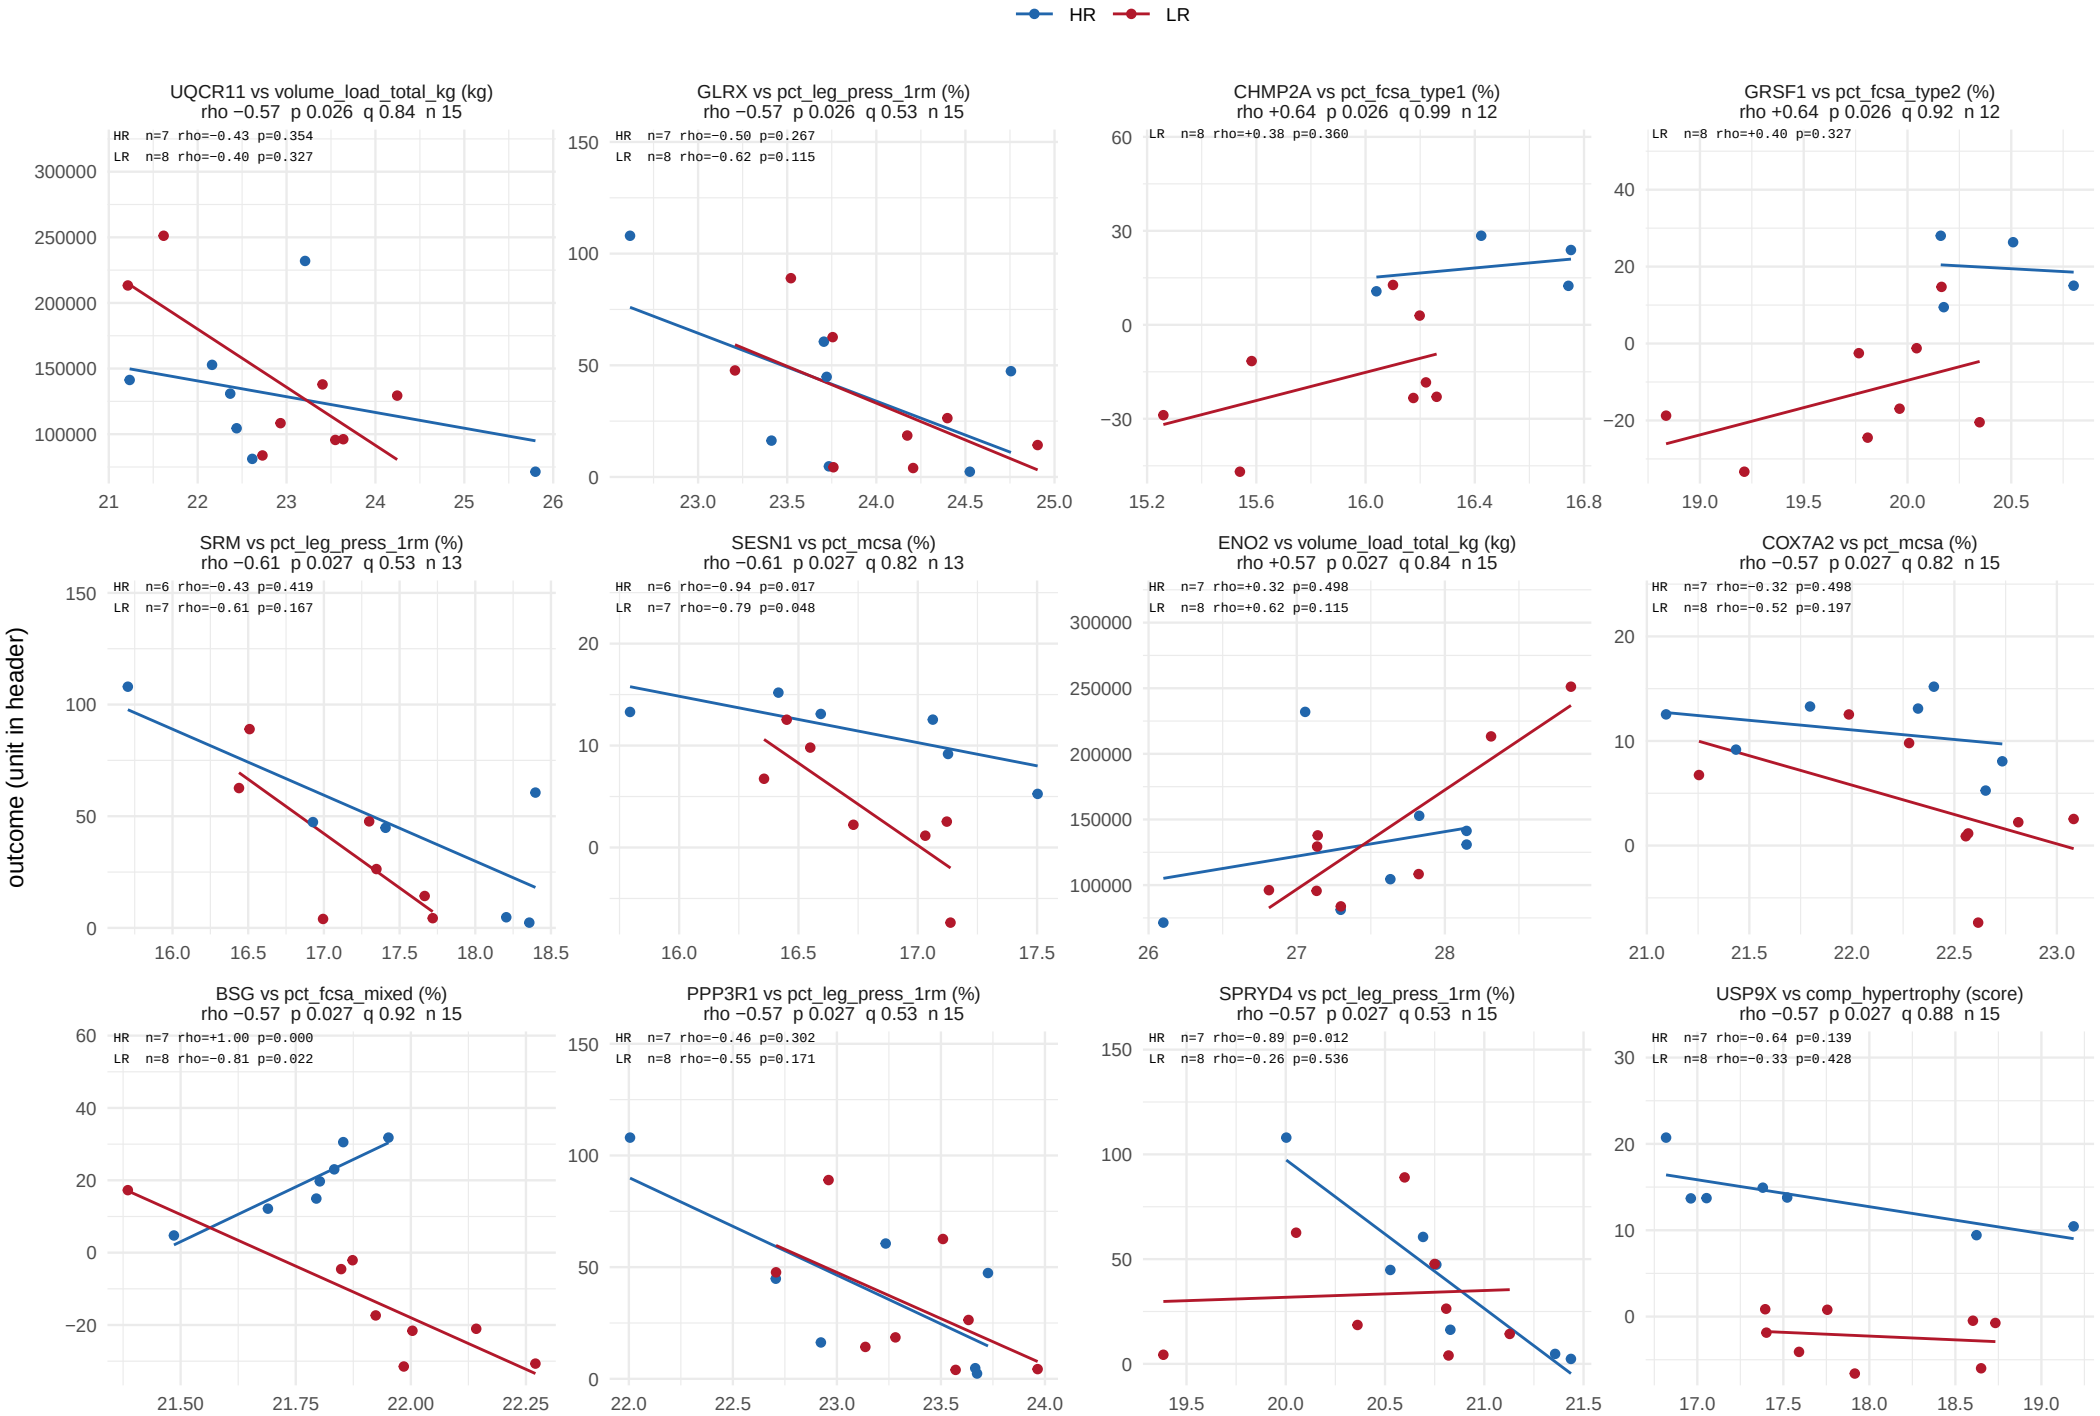

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


673 of 12553 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 32 of 57.

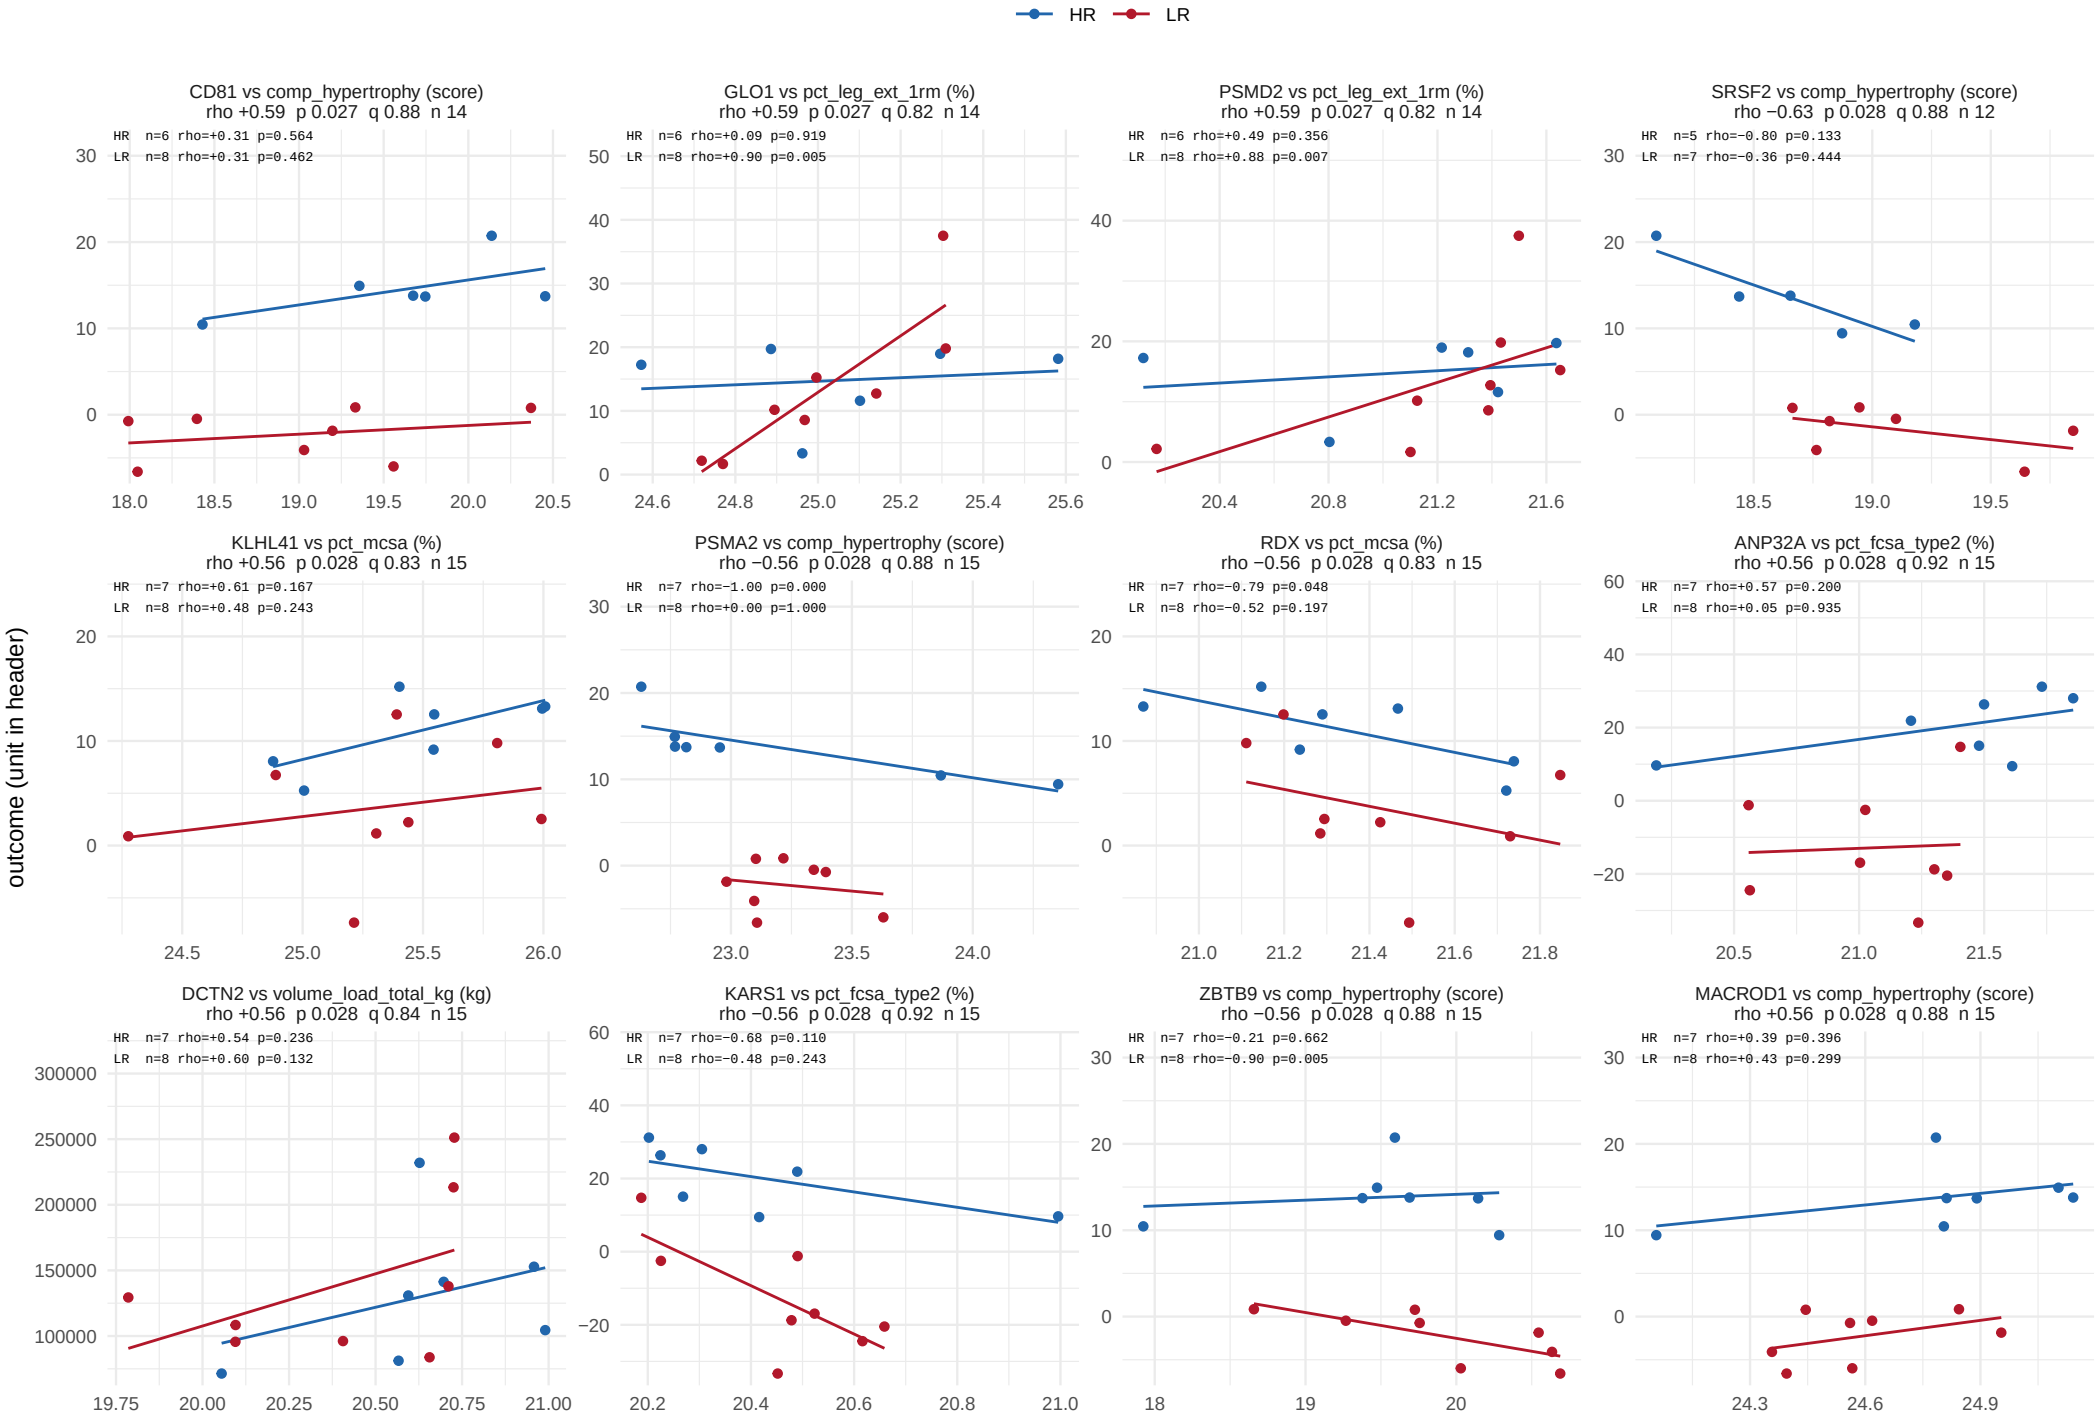

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


673 of 12553 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 33 of 57.

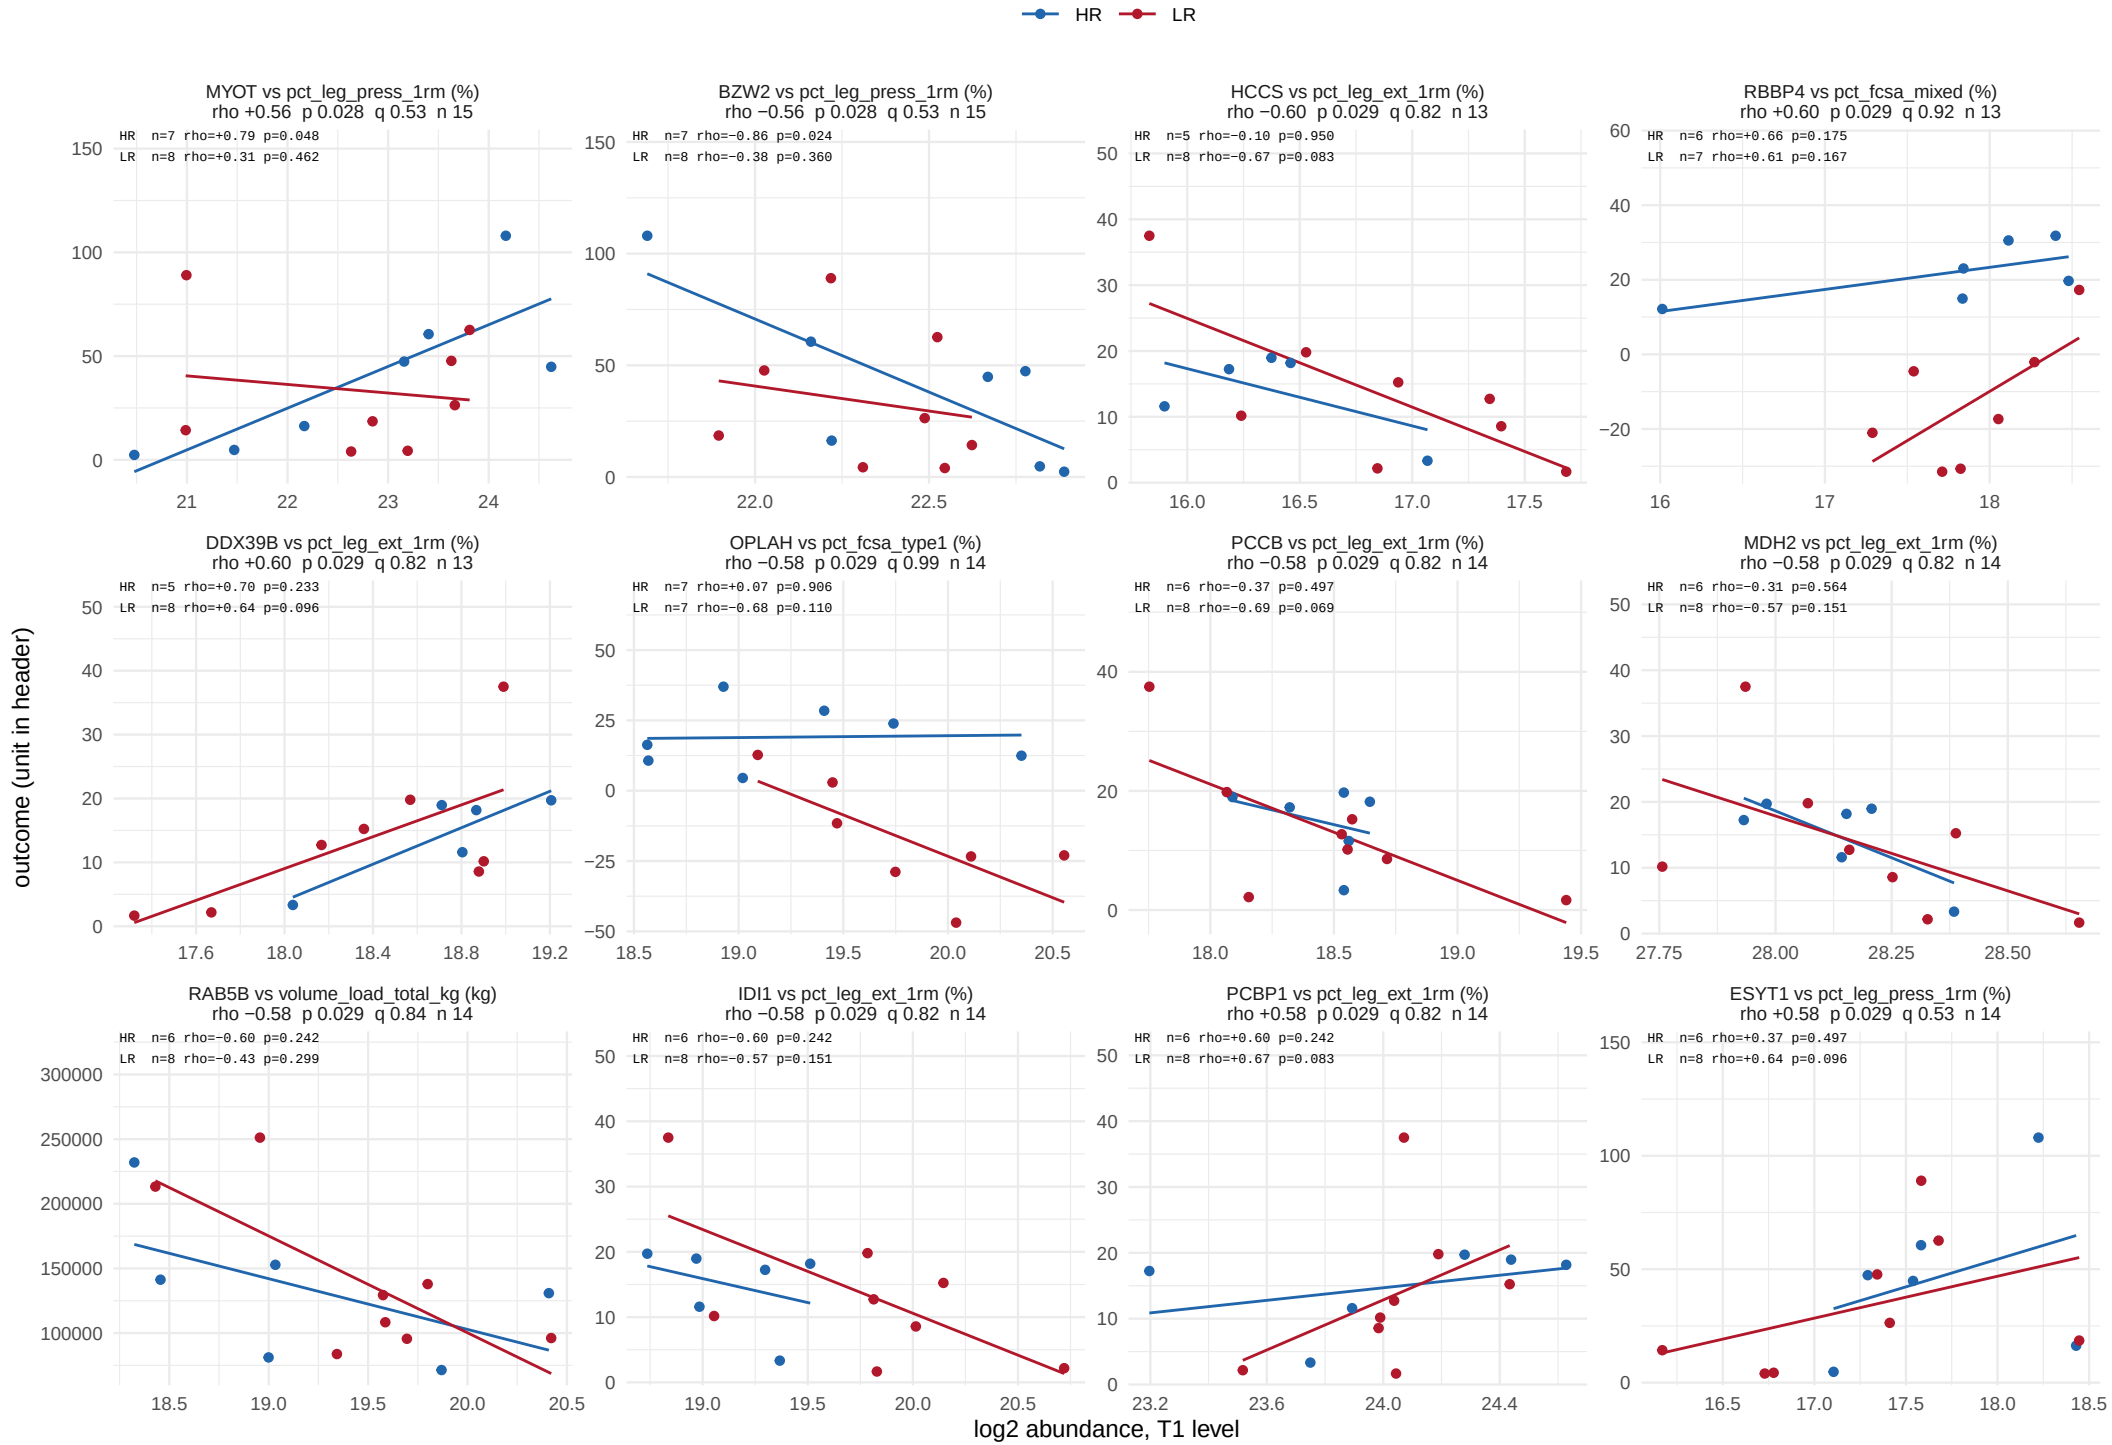

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


673 of 12553 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 34 of 57.

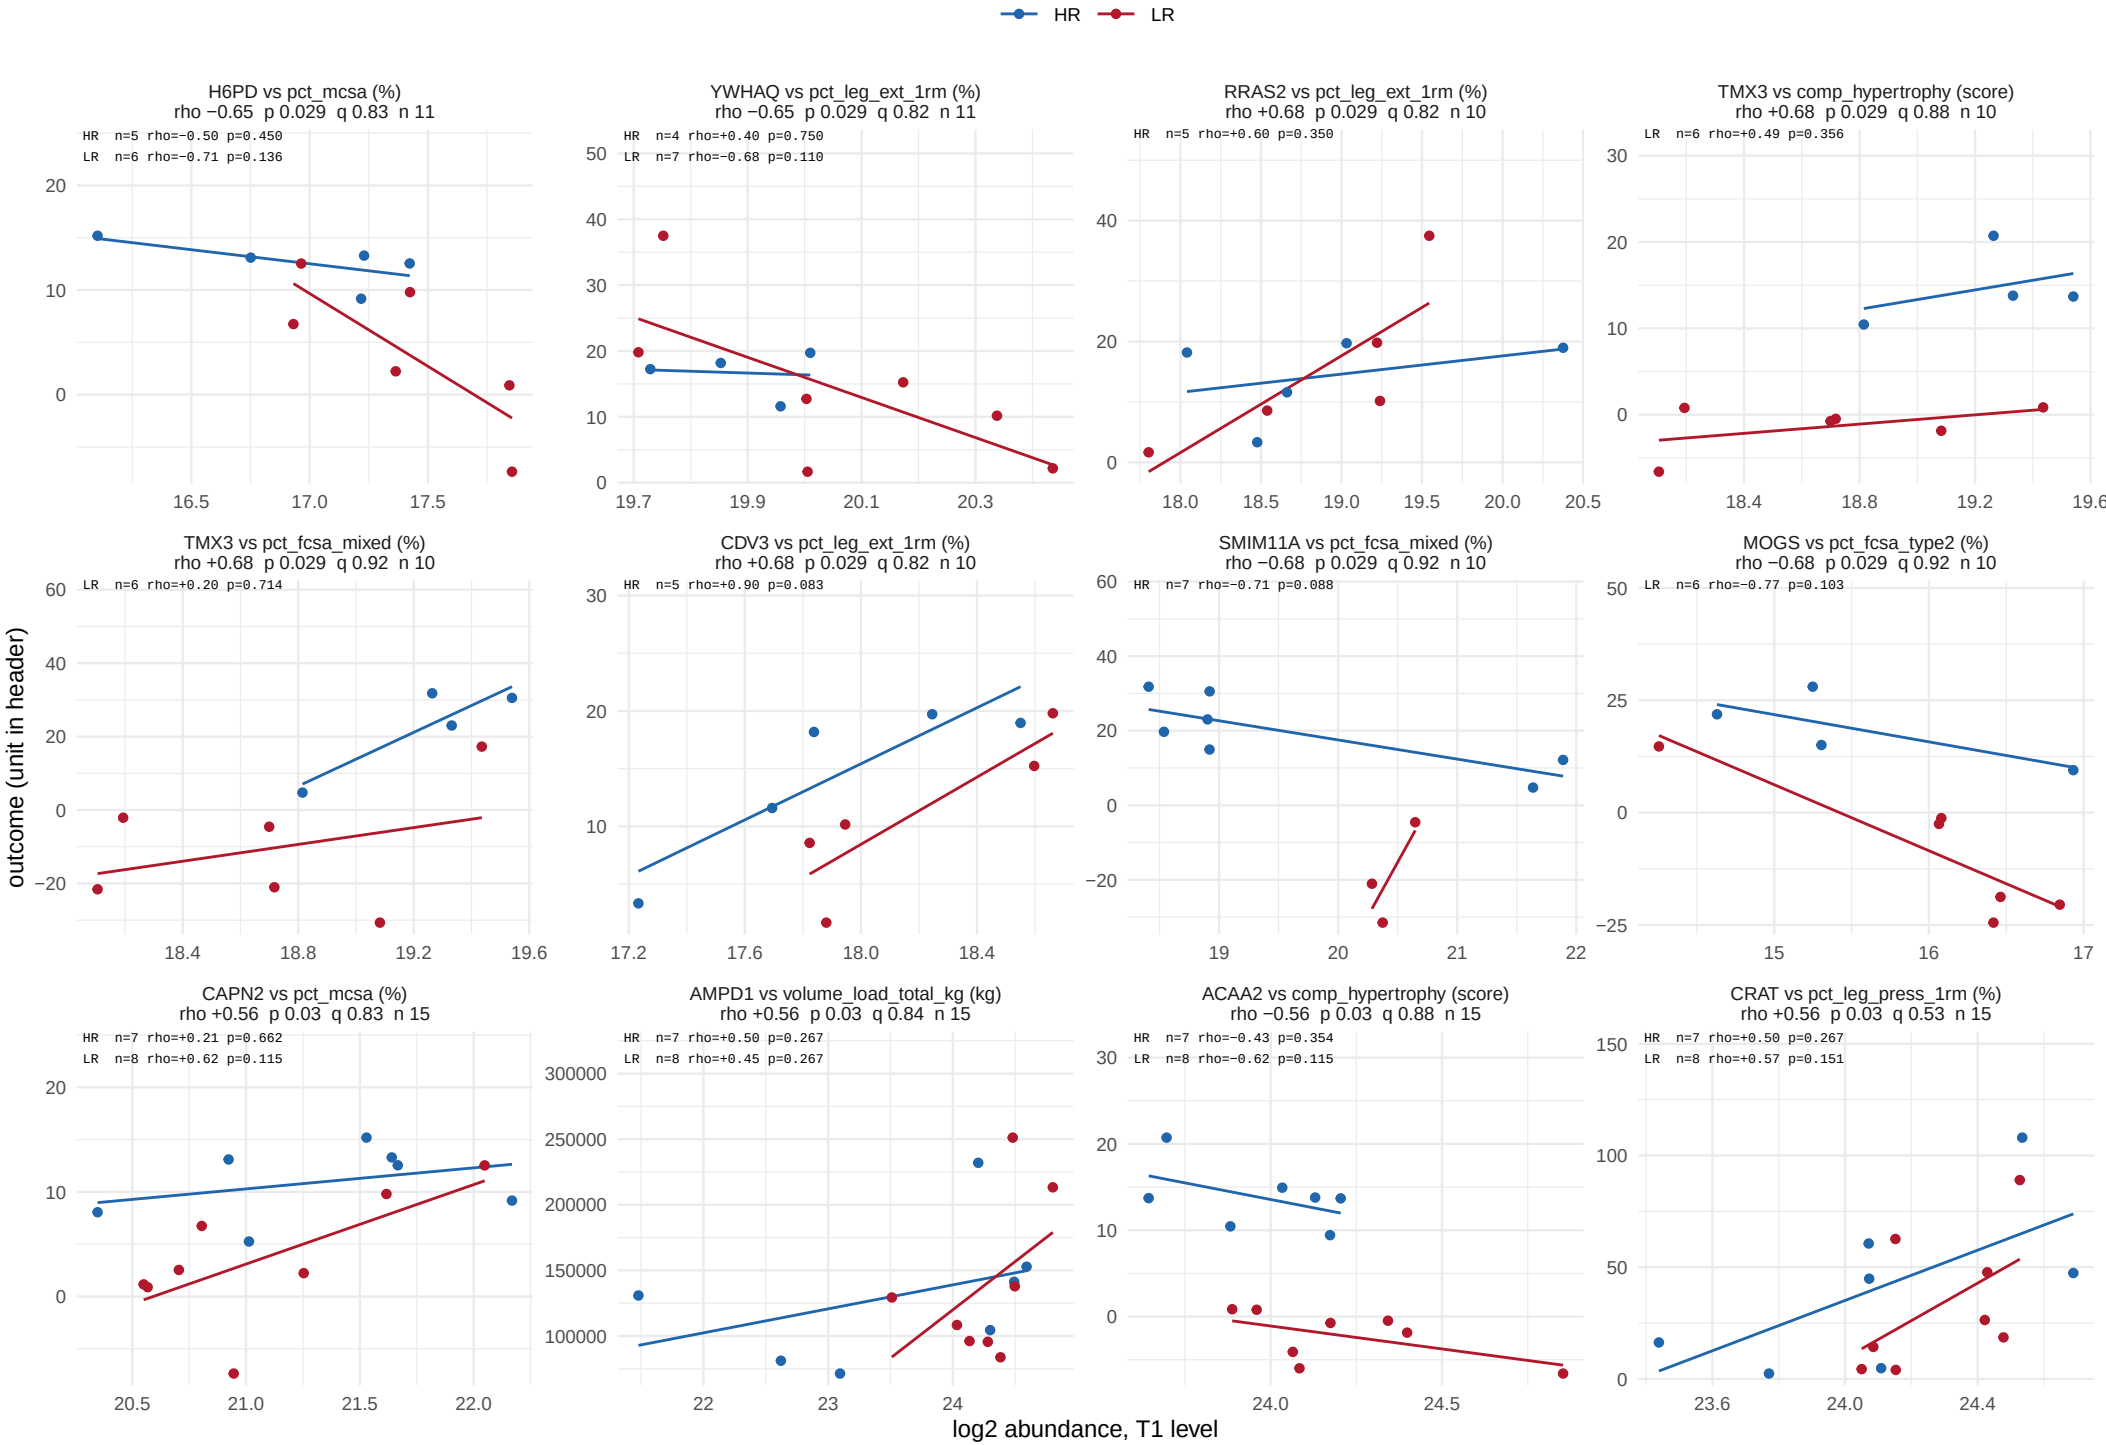

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


673 of 12553 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 35 of 57.

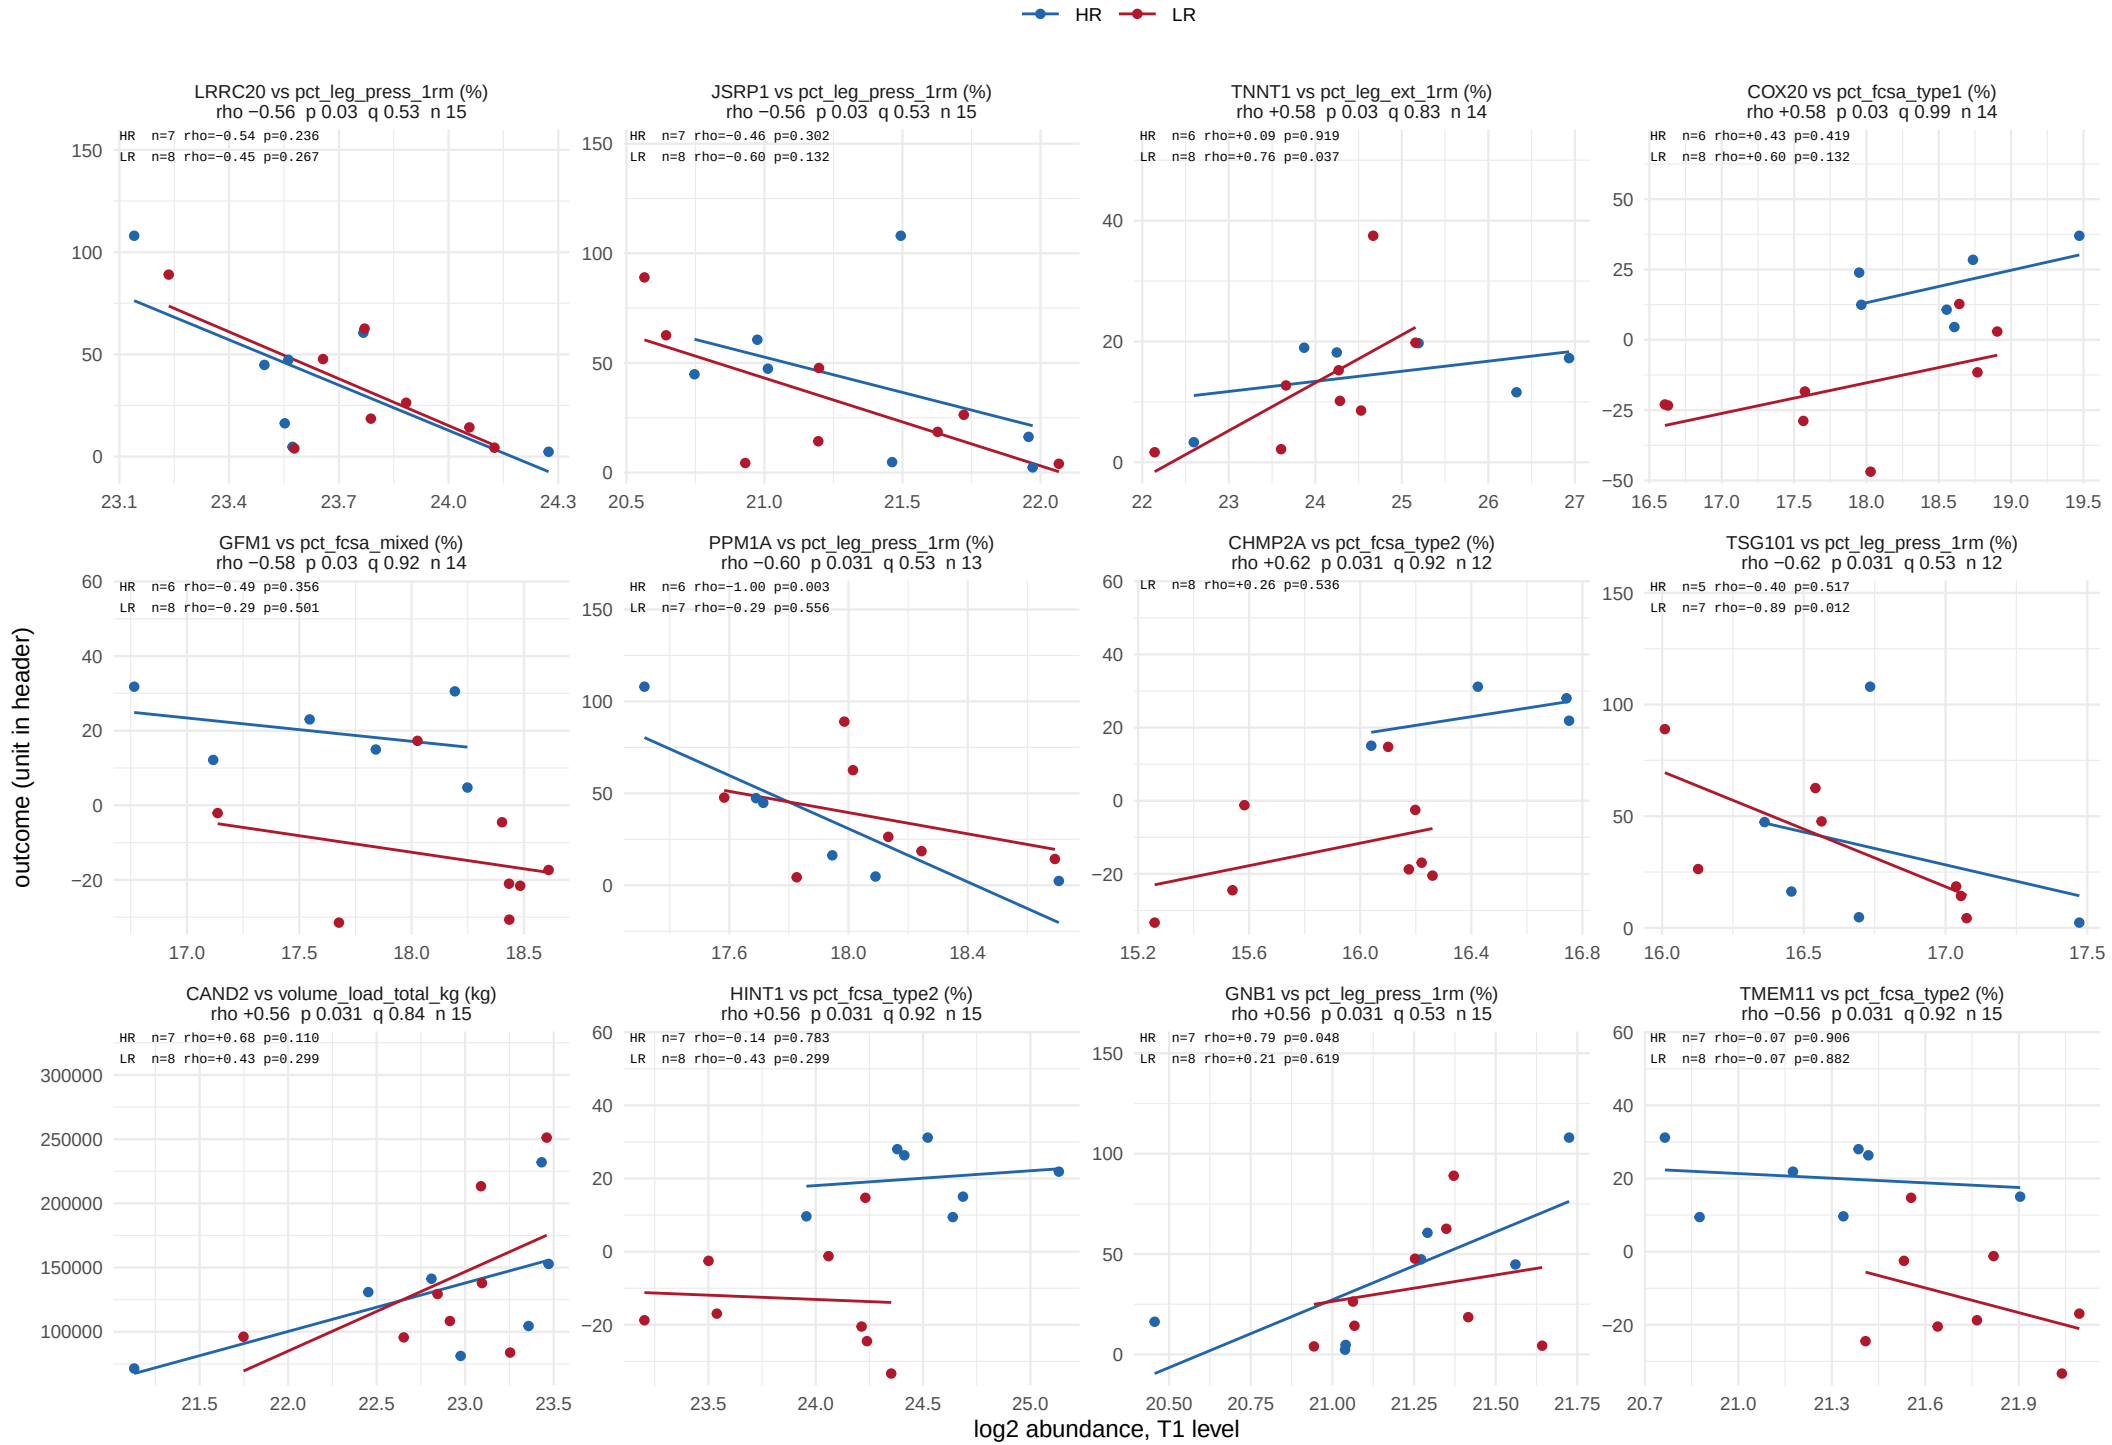

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


673 of 12553 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 36 of 57.

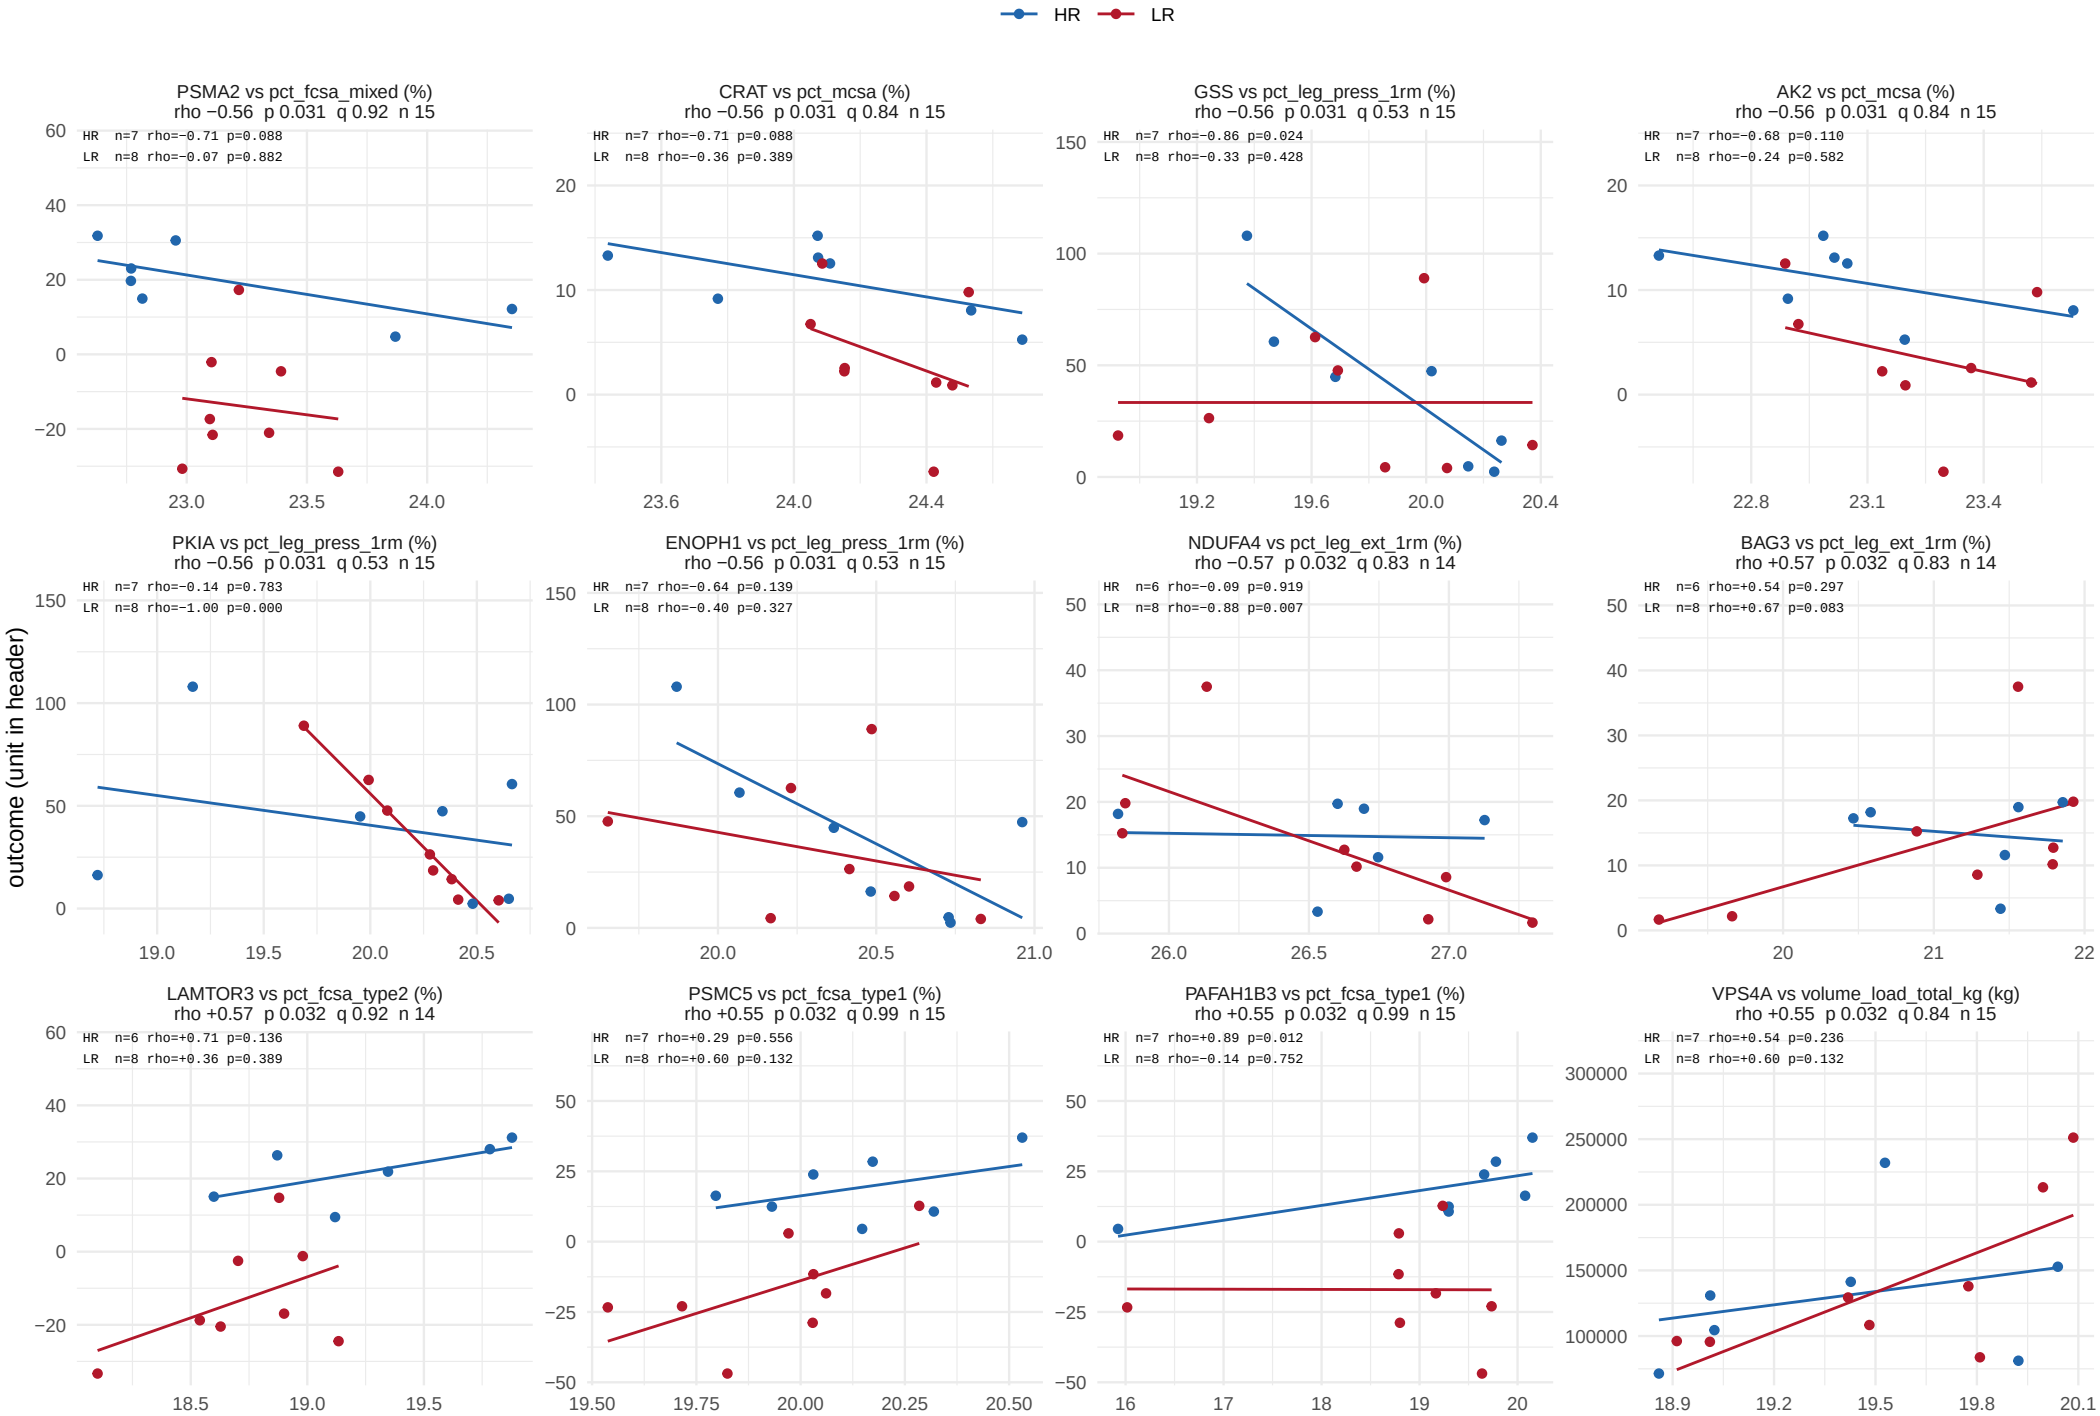

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


673 of 12553 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 37 of 57.

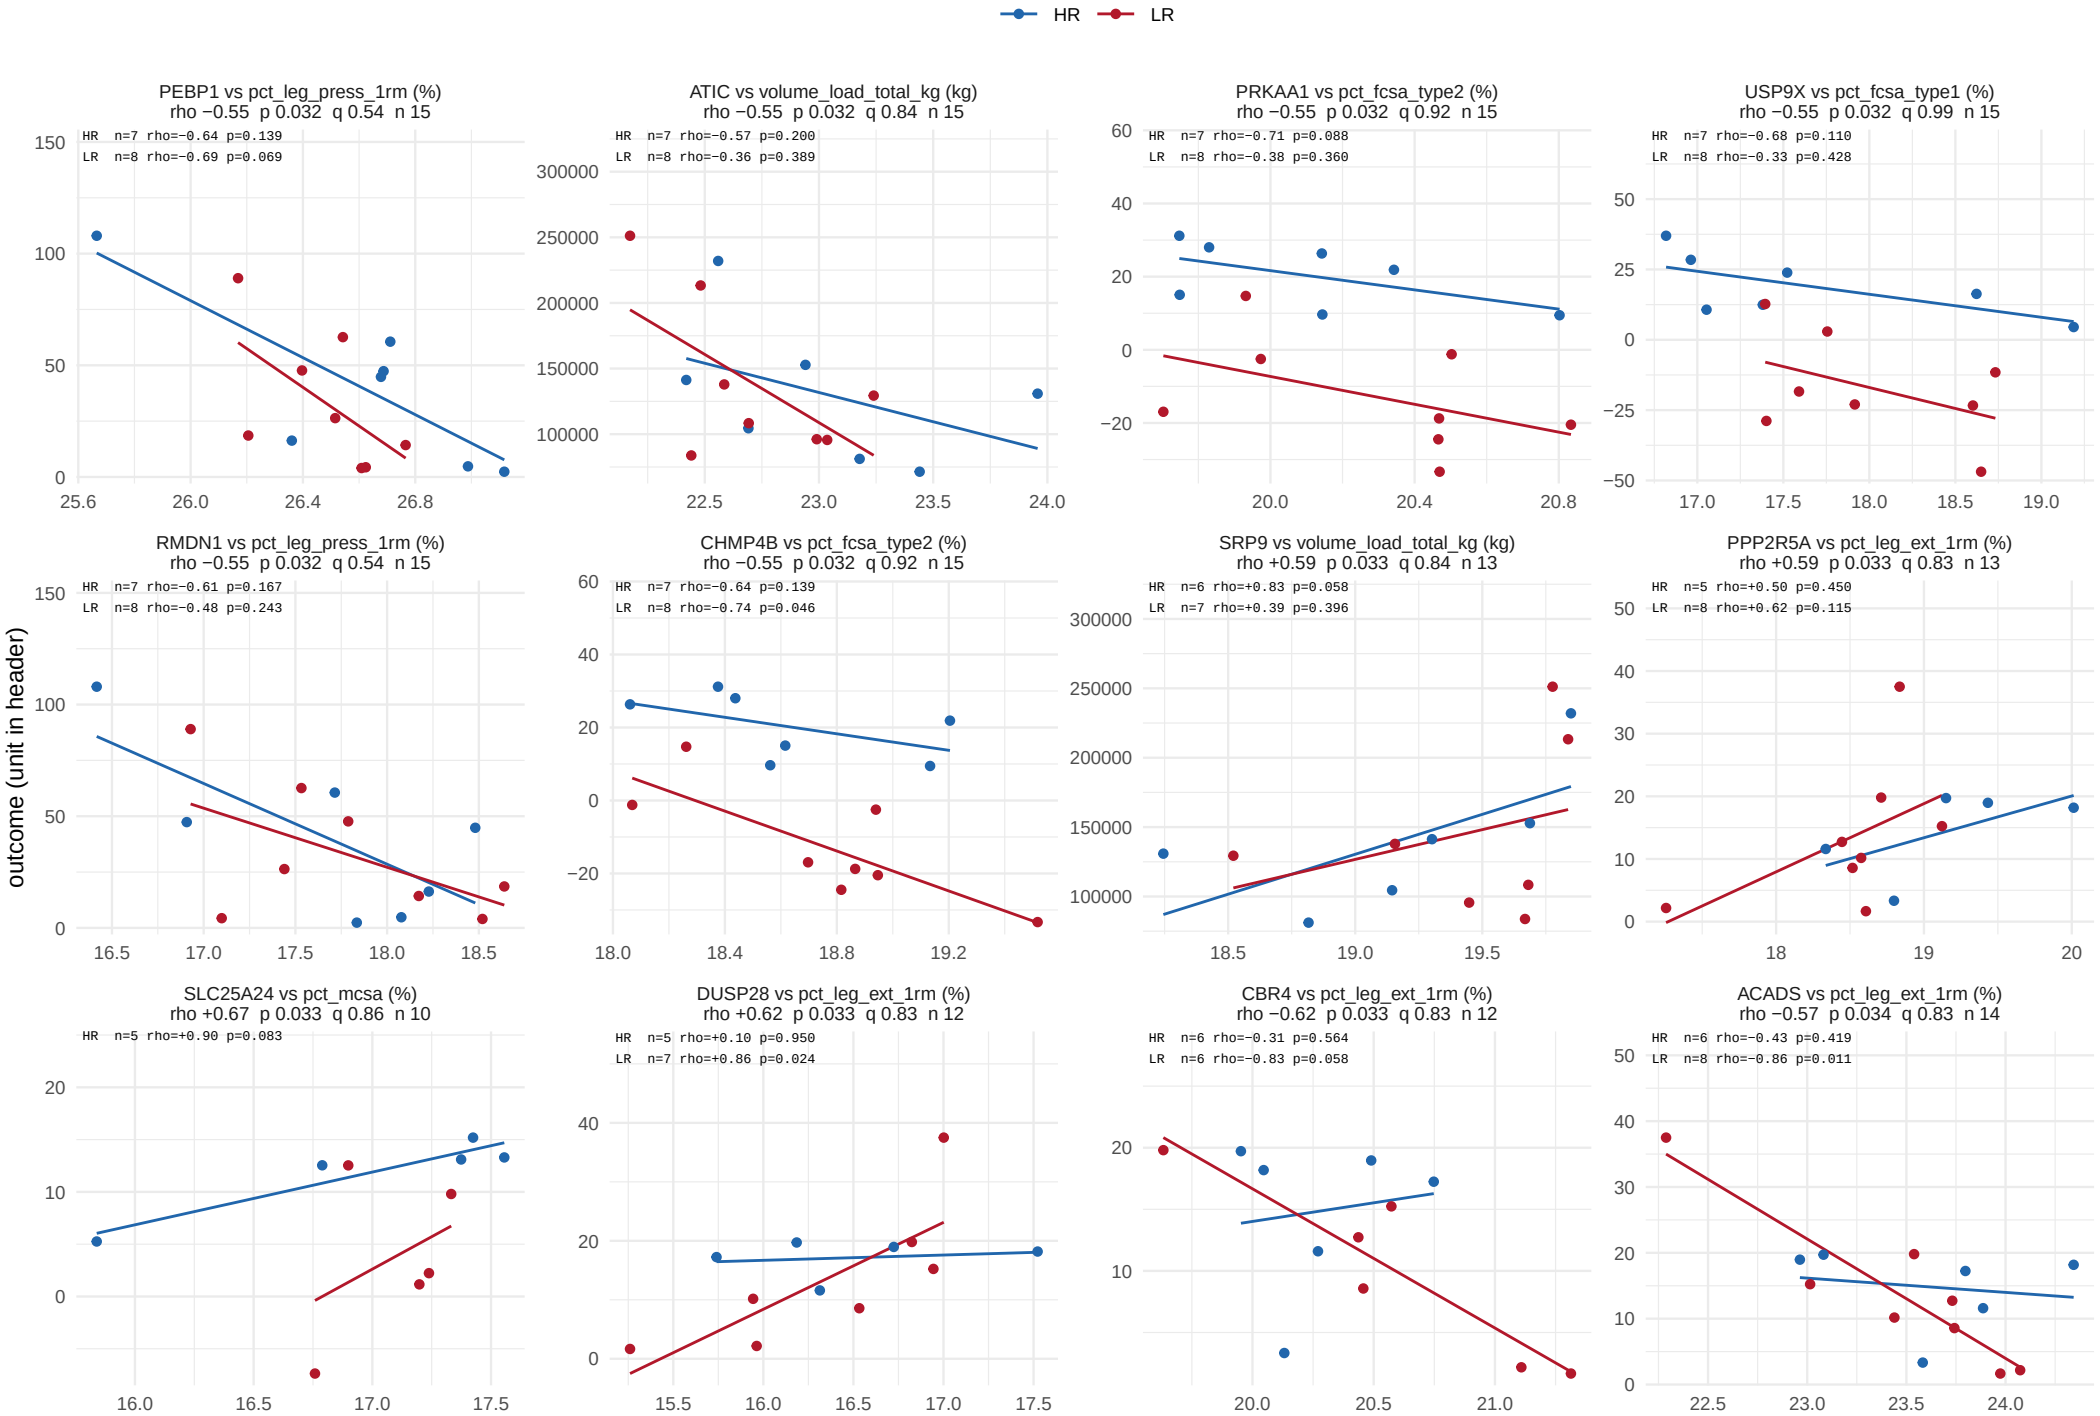

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


673 of 12553 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 38 of 57.

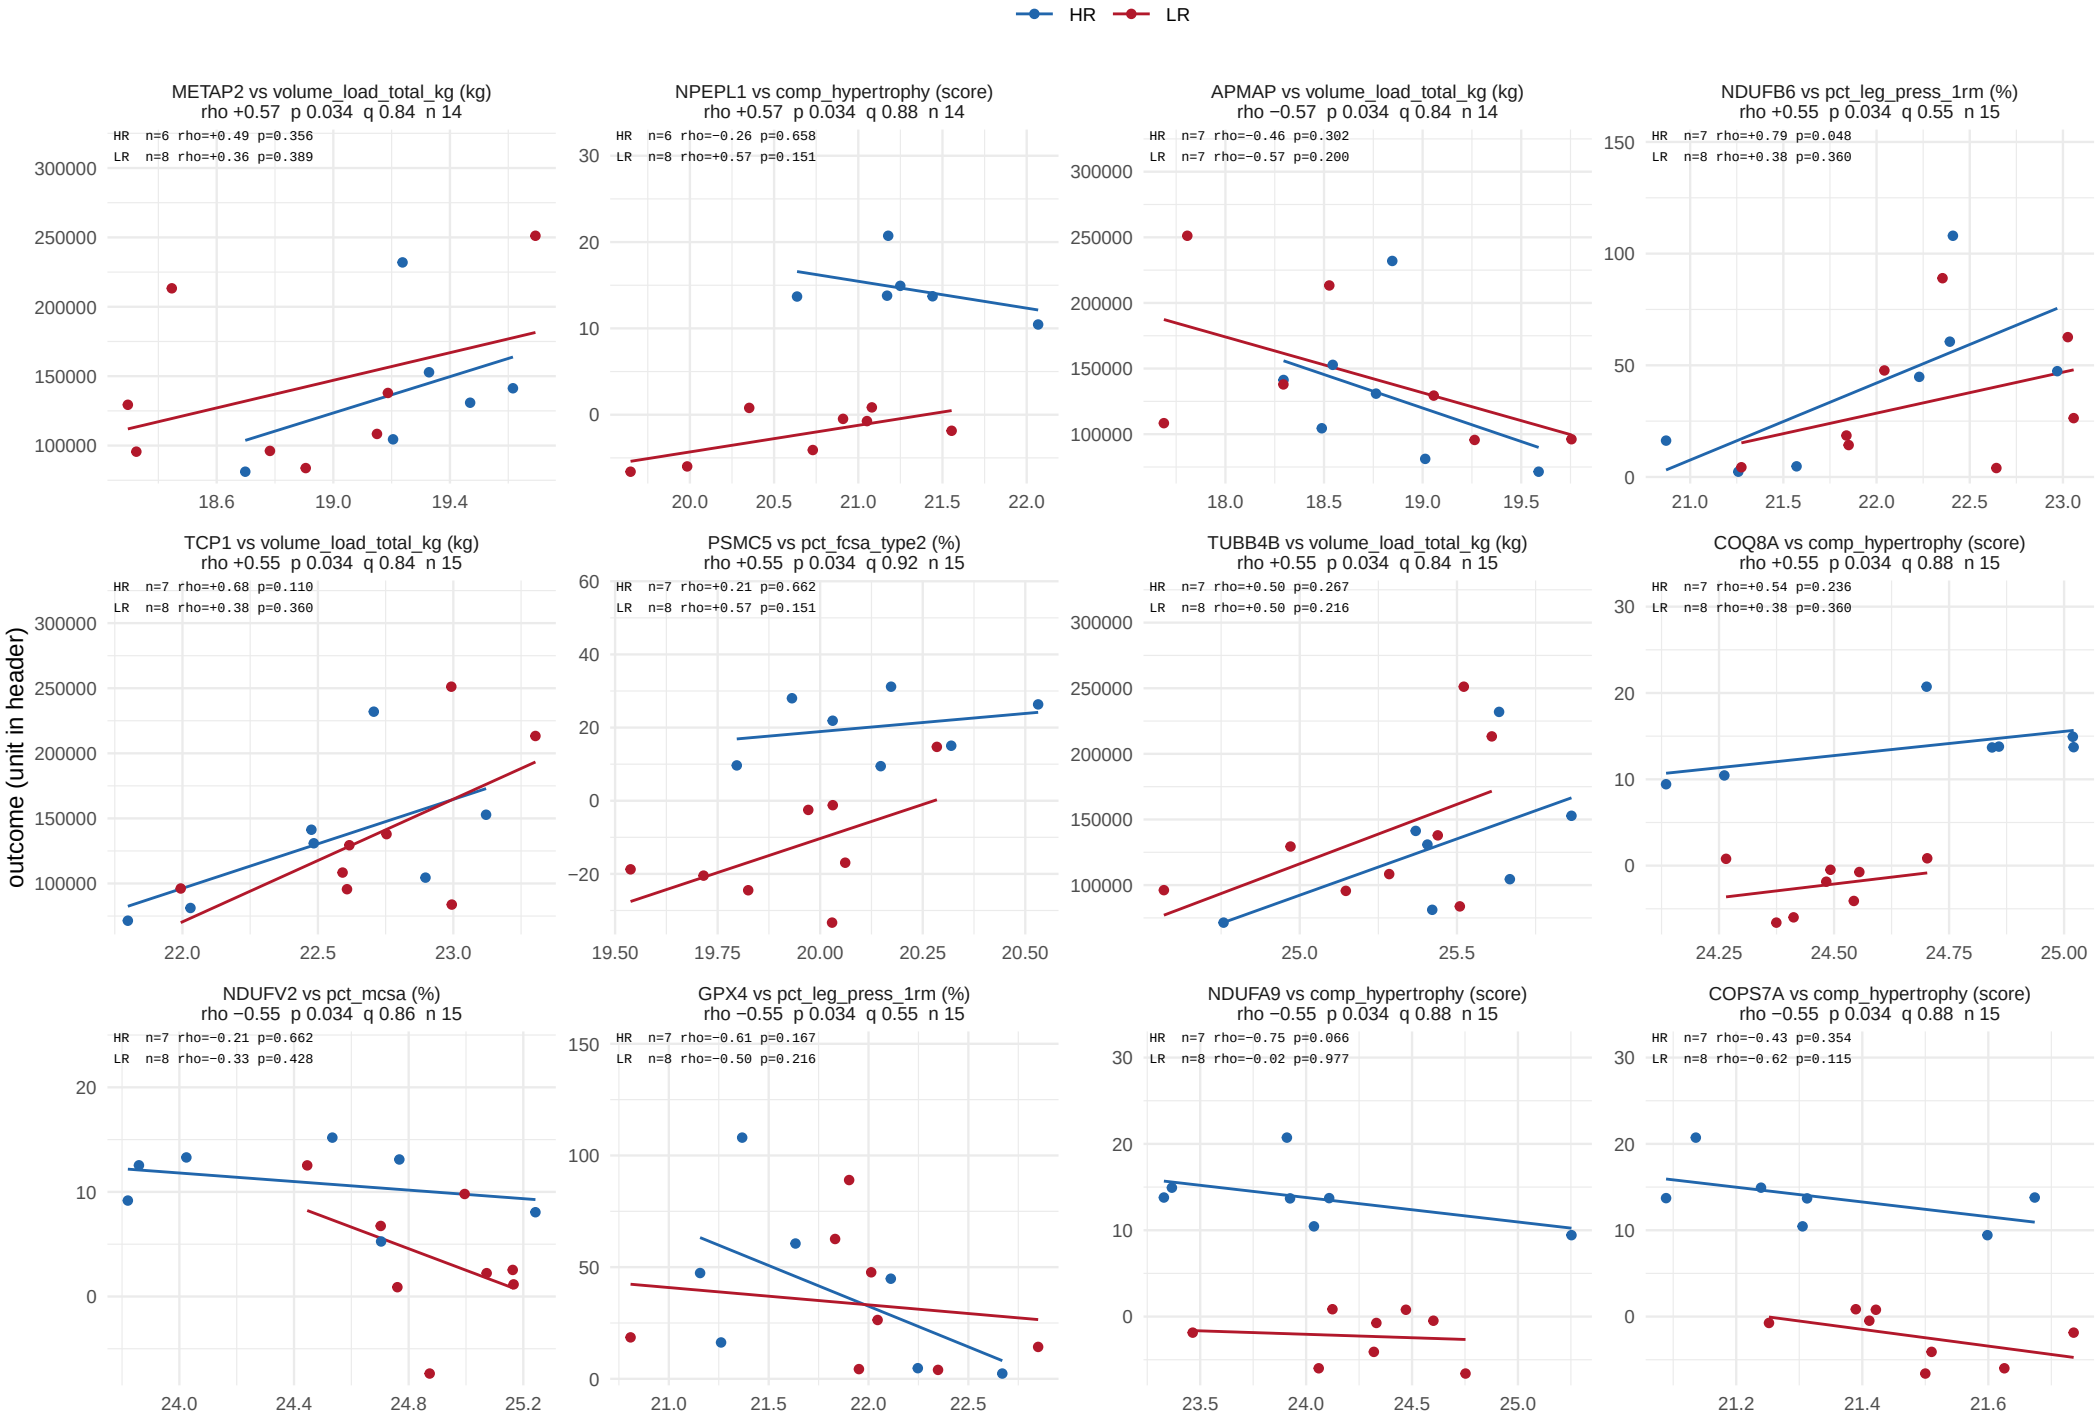

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


673 of 12553 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 39 of 57.

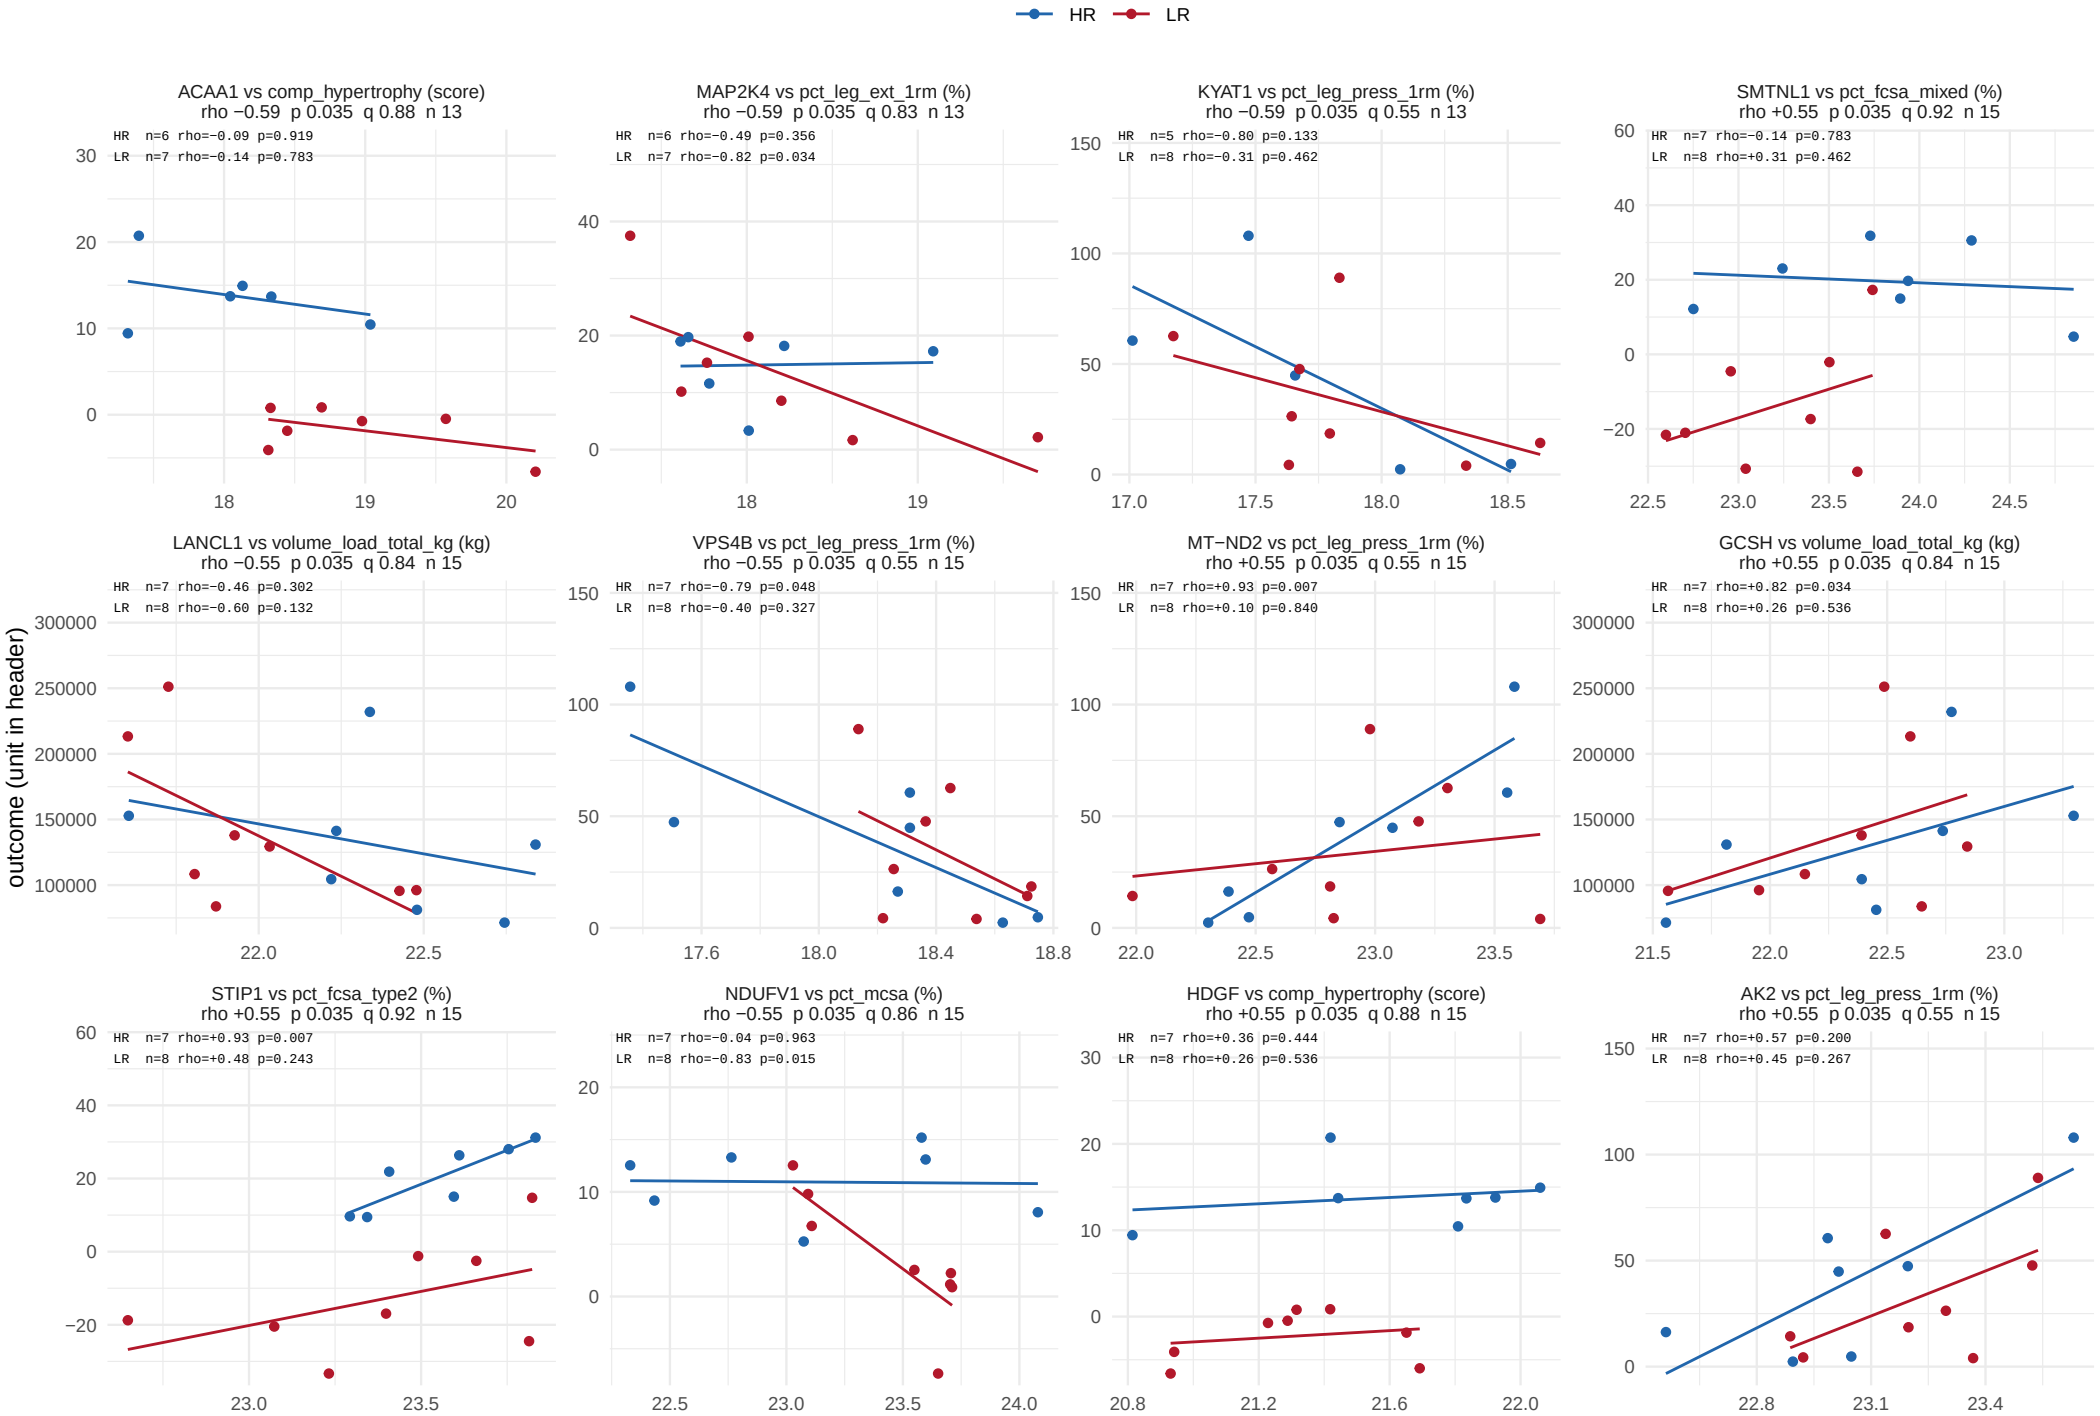

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


673 of 12553 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 40 of 57.

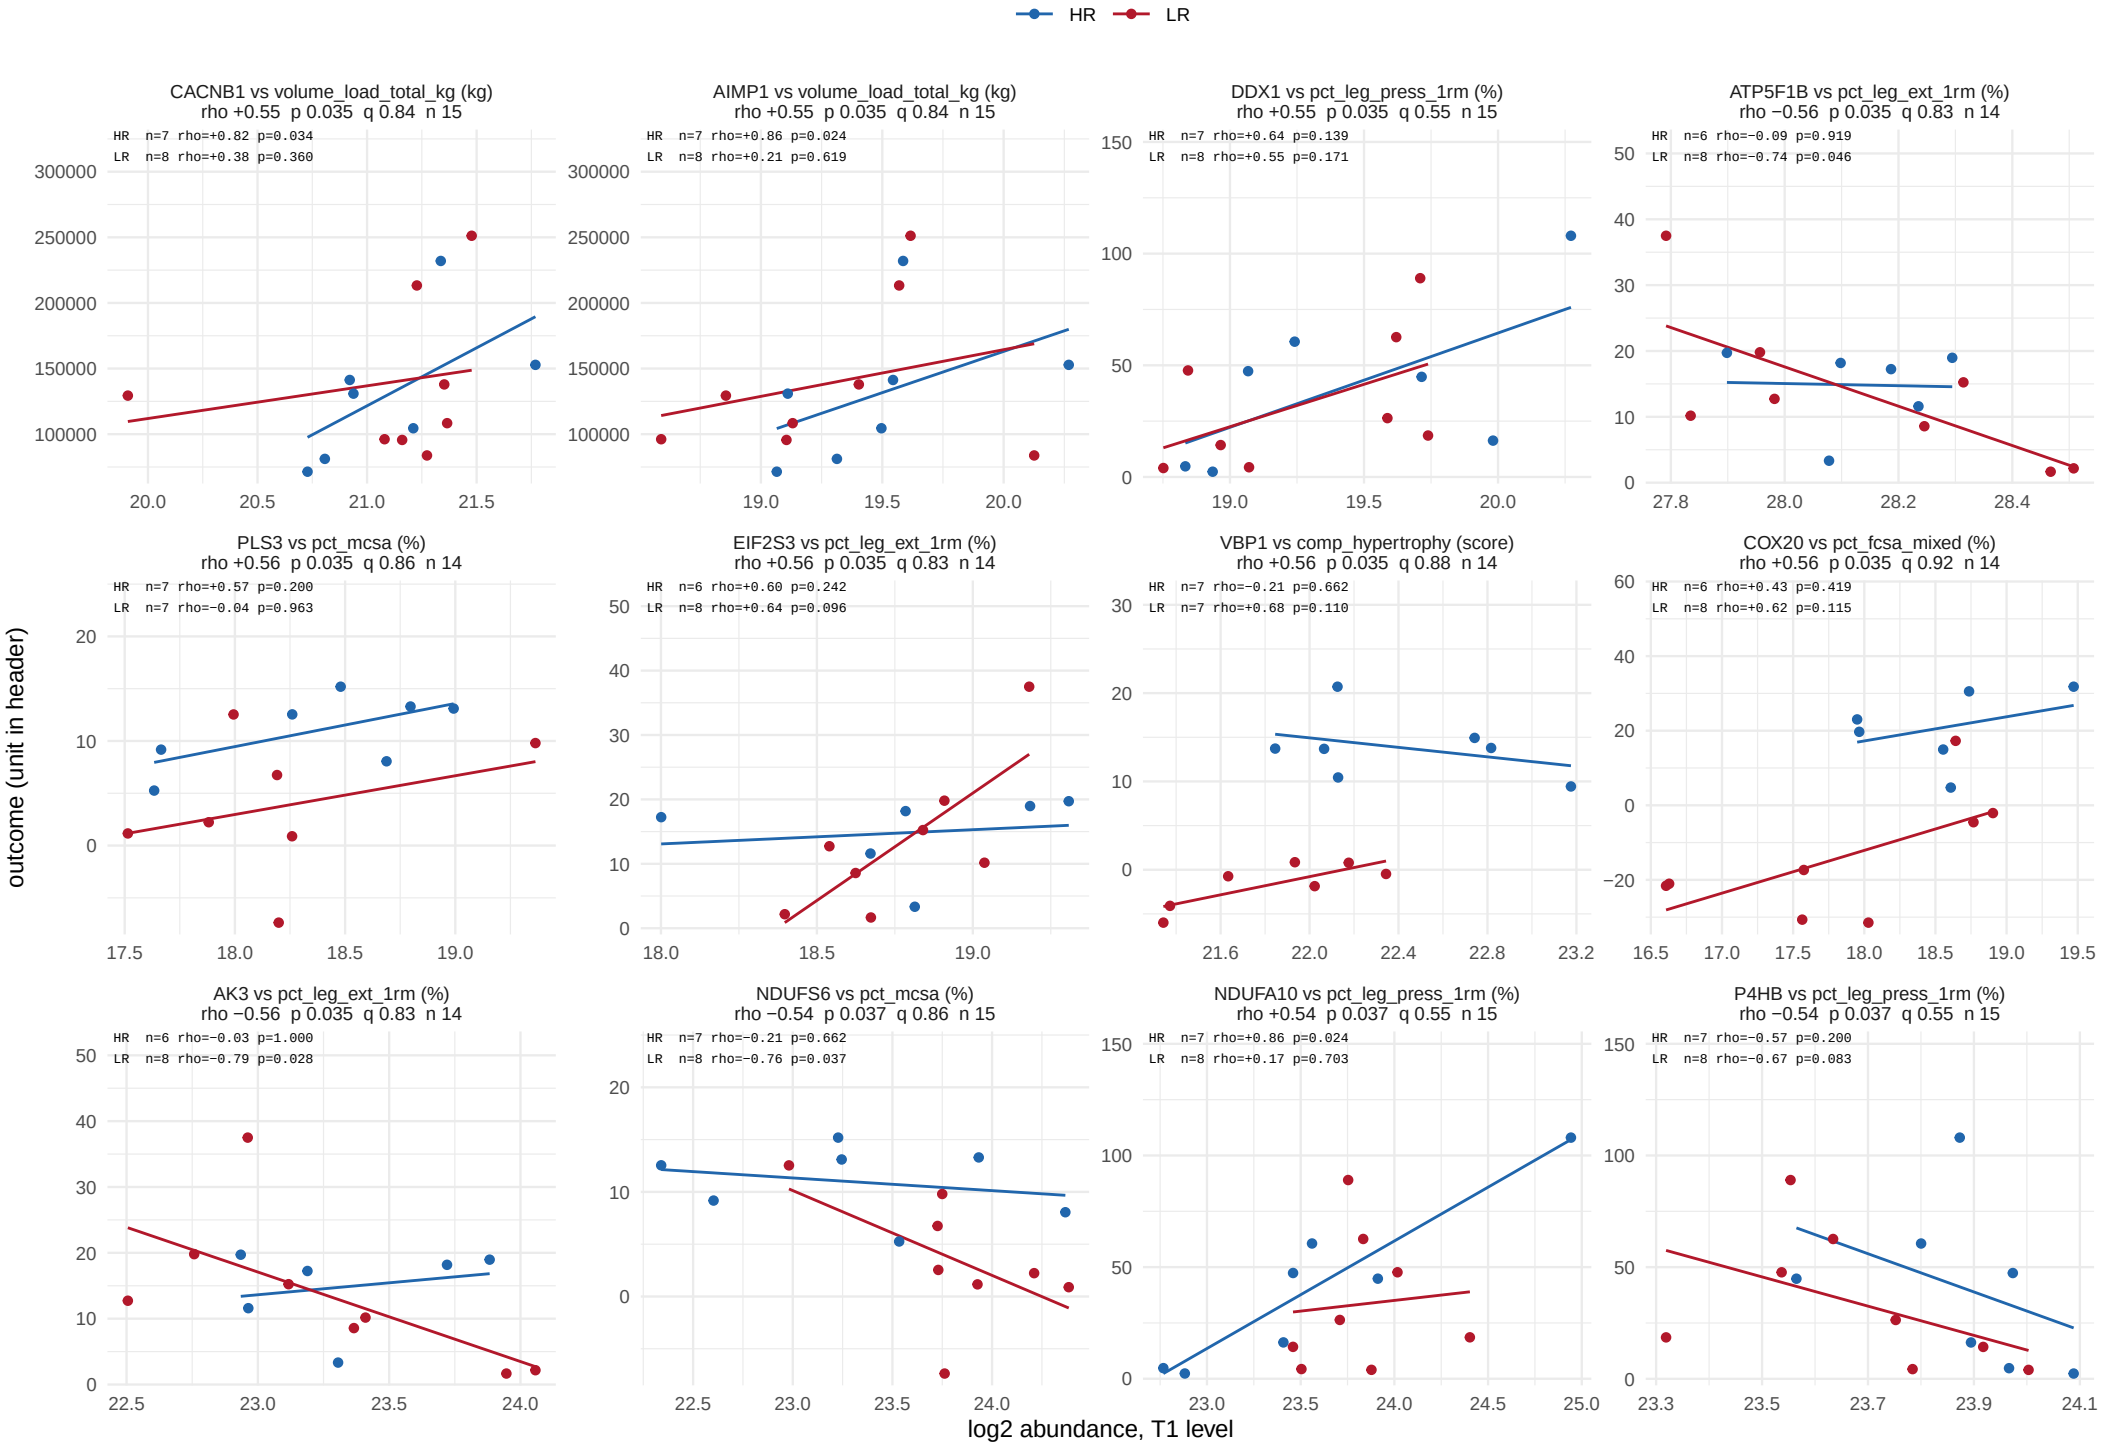

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


673 of 12553 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 41 of 57.

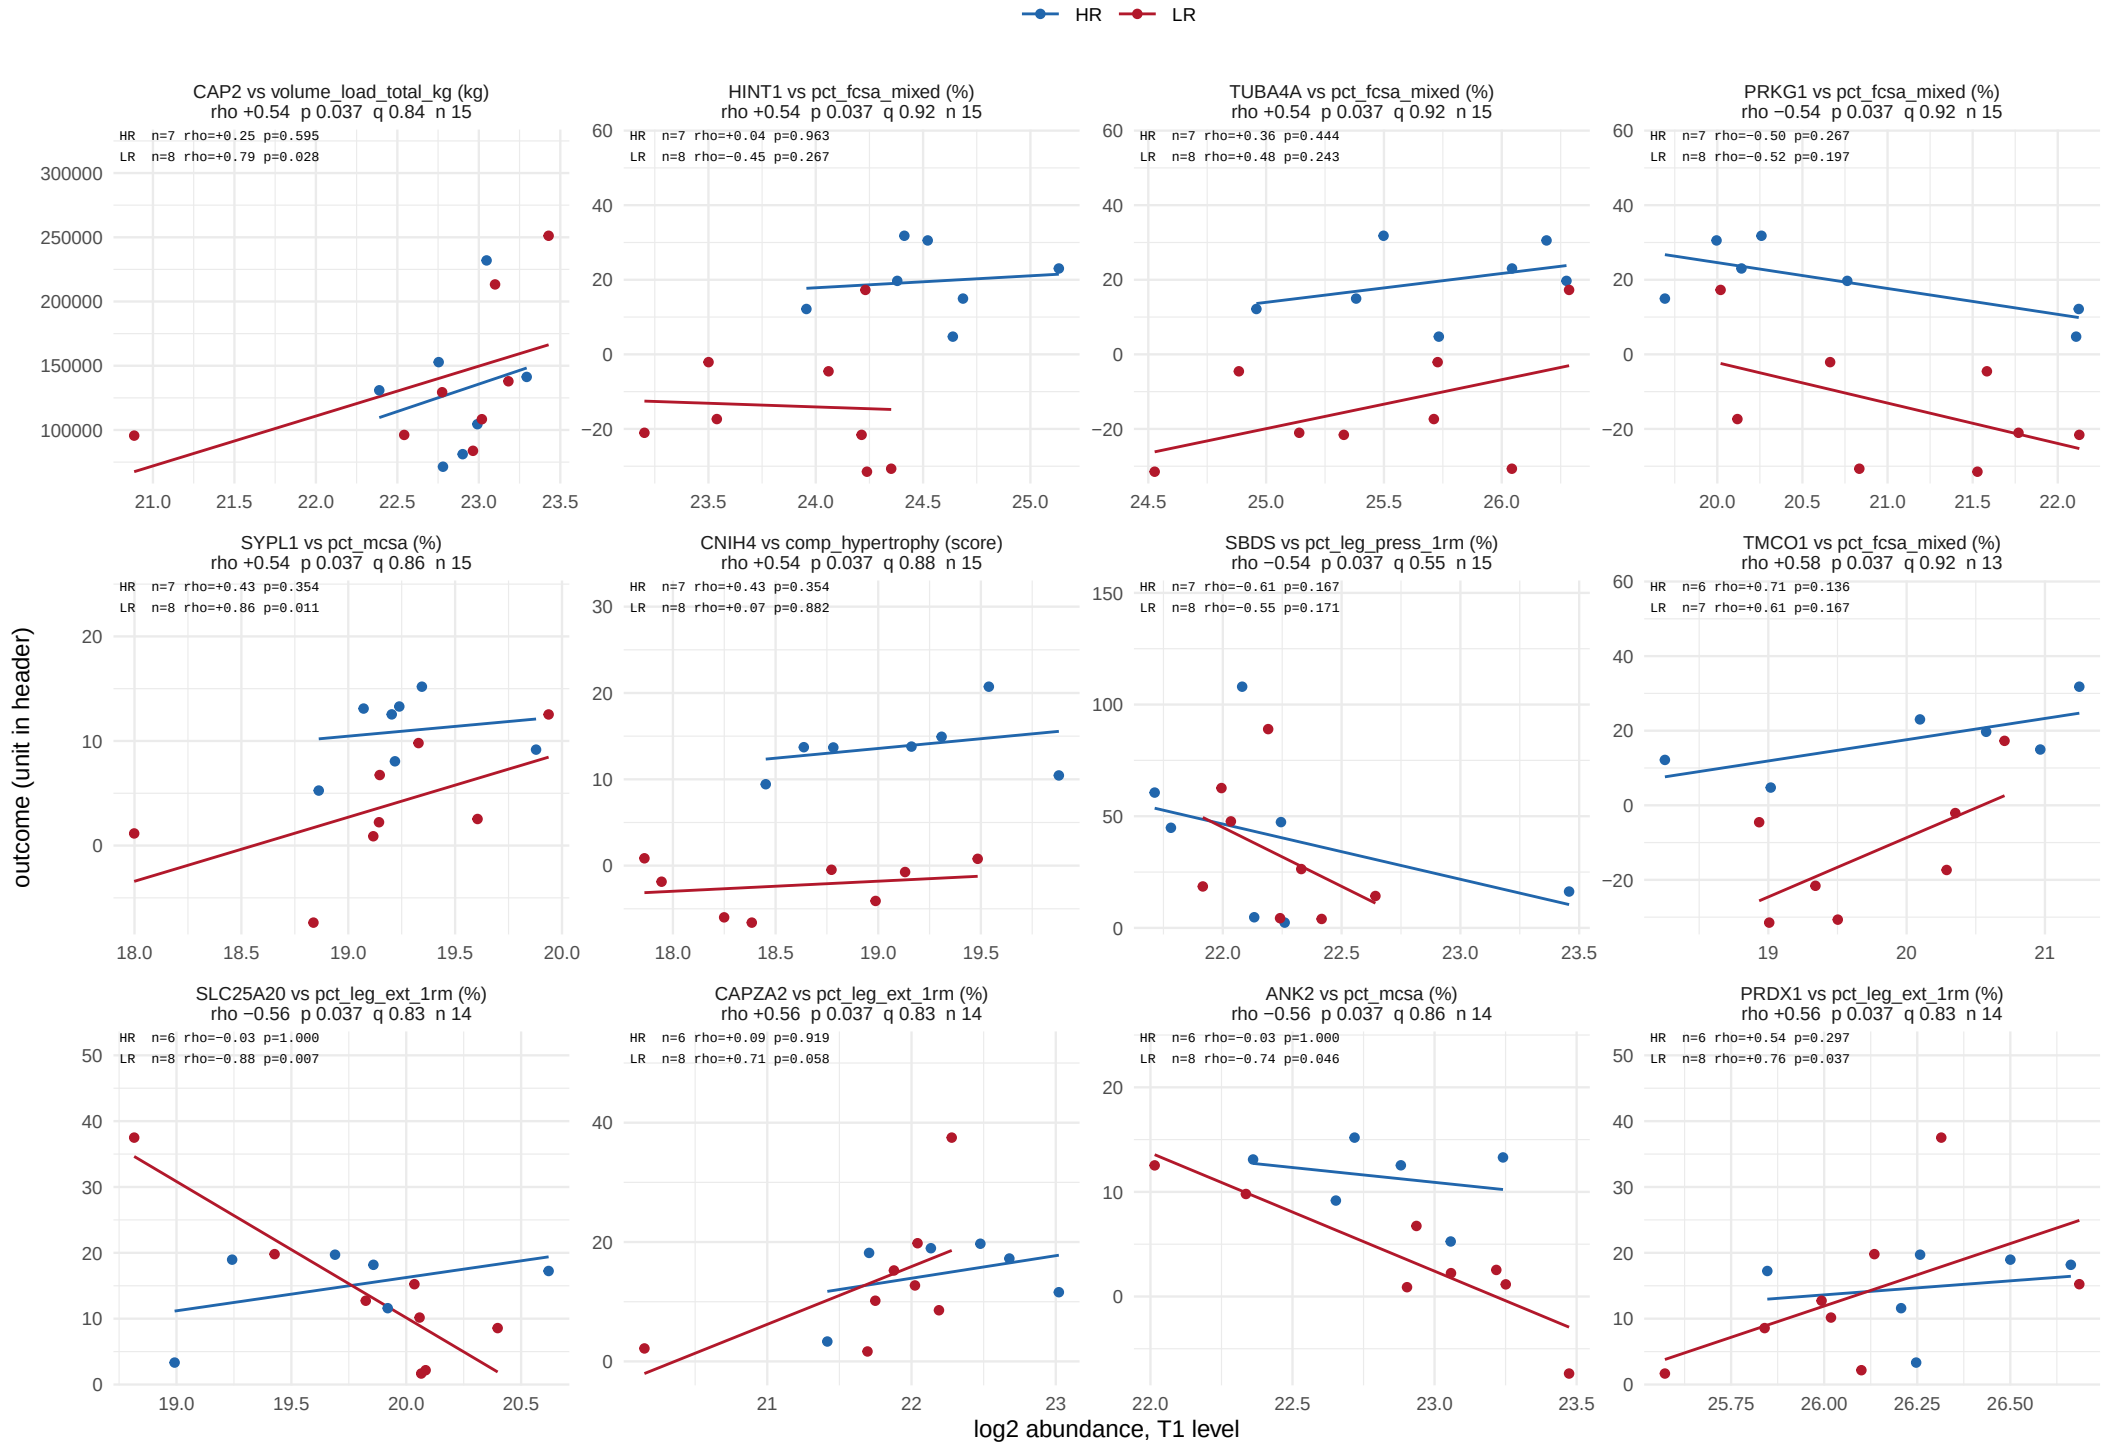

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


673 of 12553 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 42 of 57.

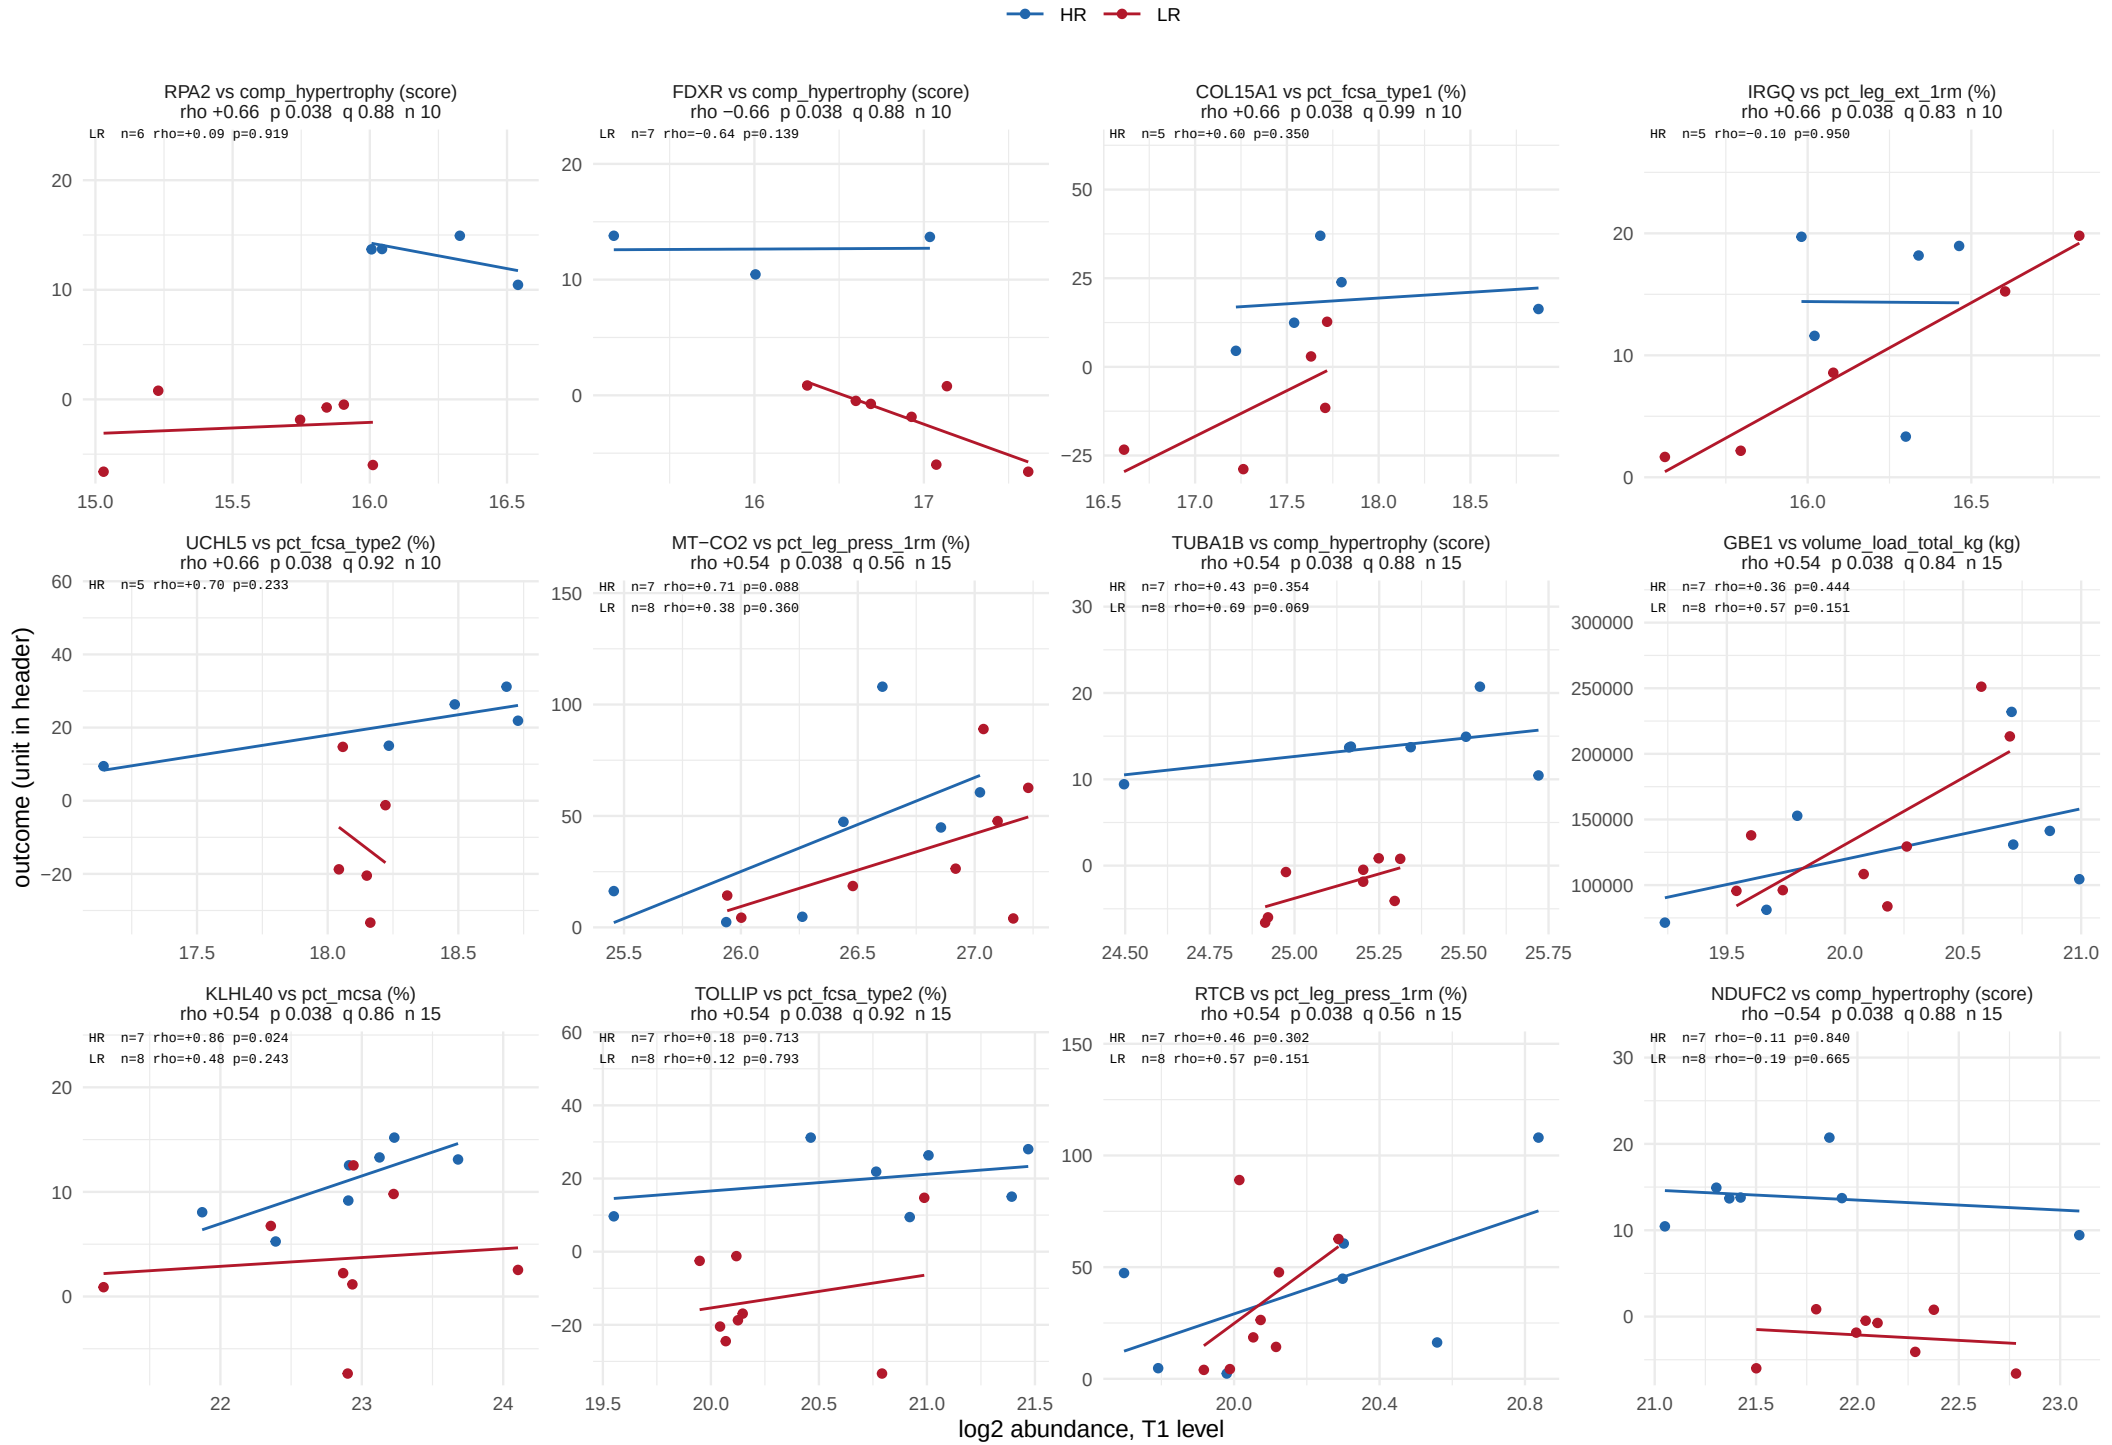

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


673 of 12553 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 43 of 57.

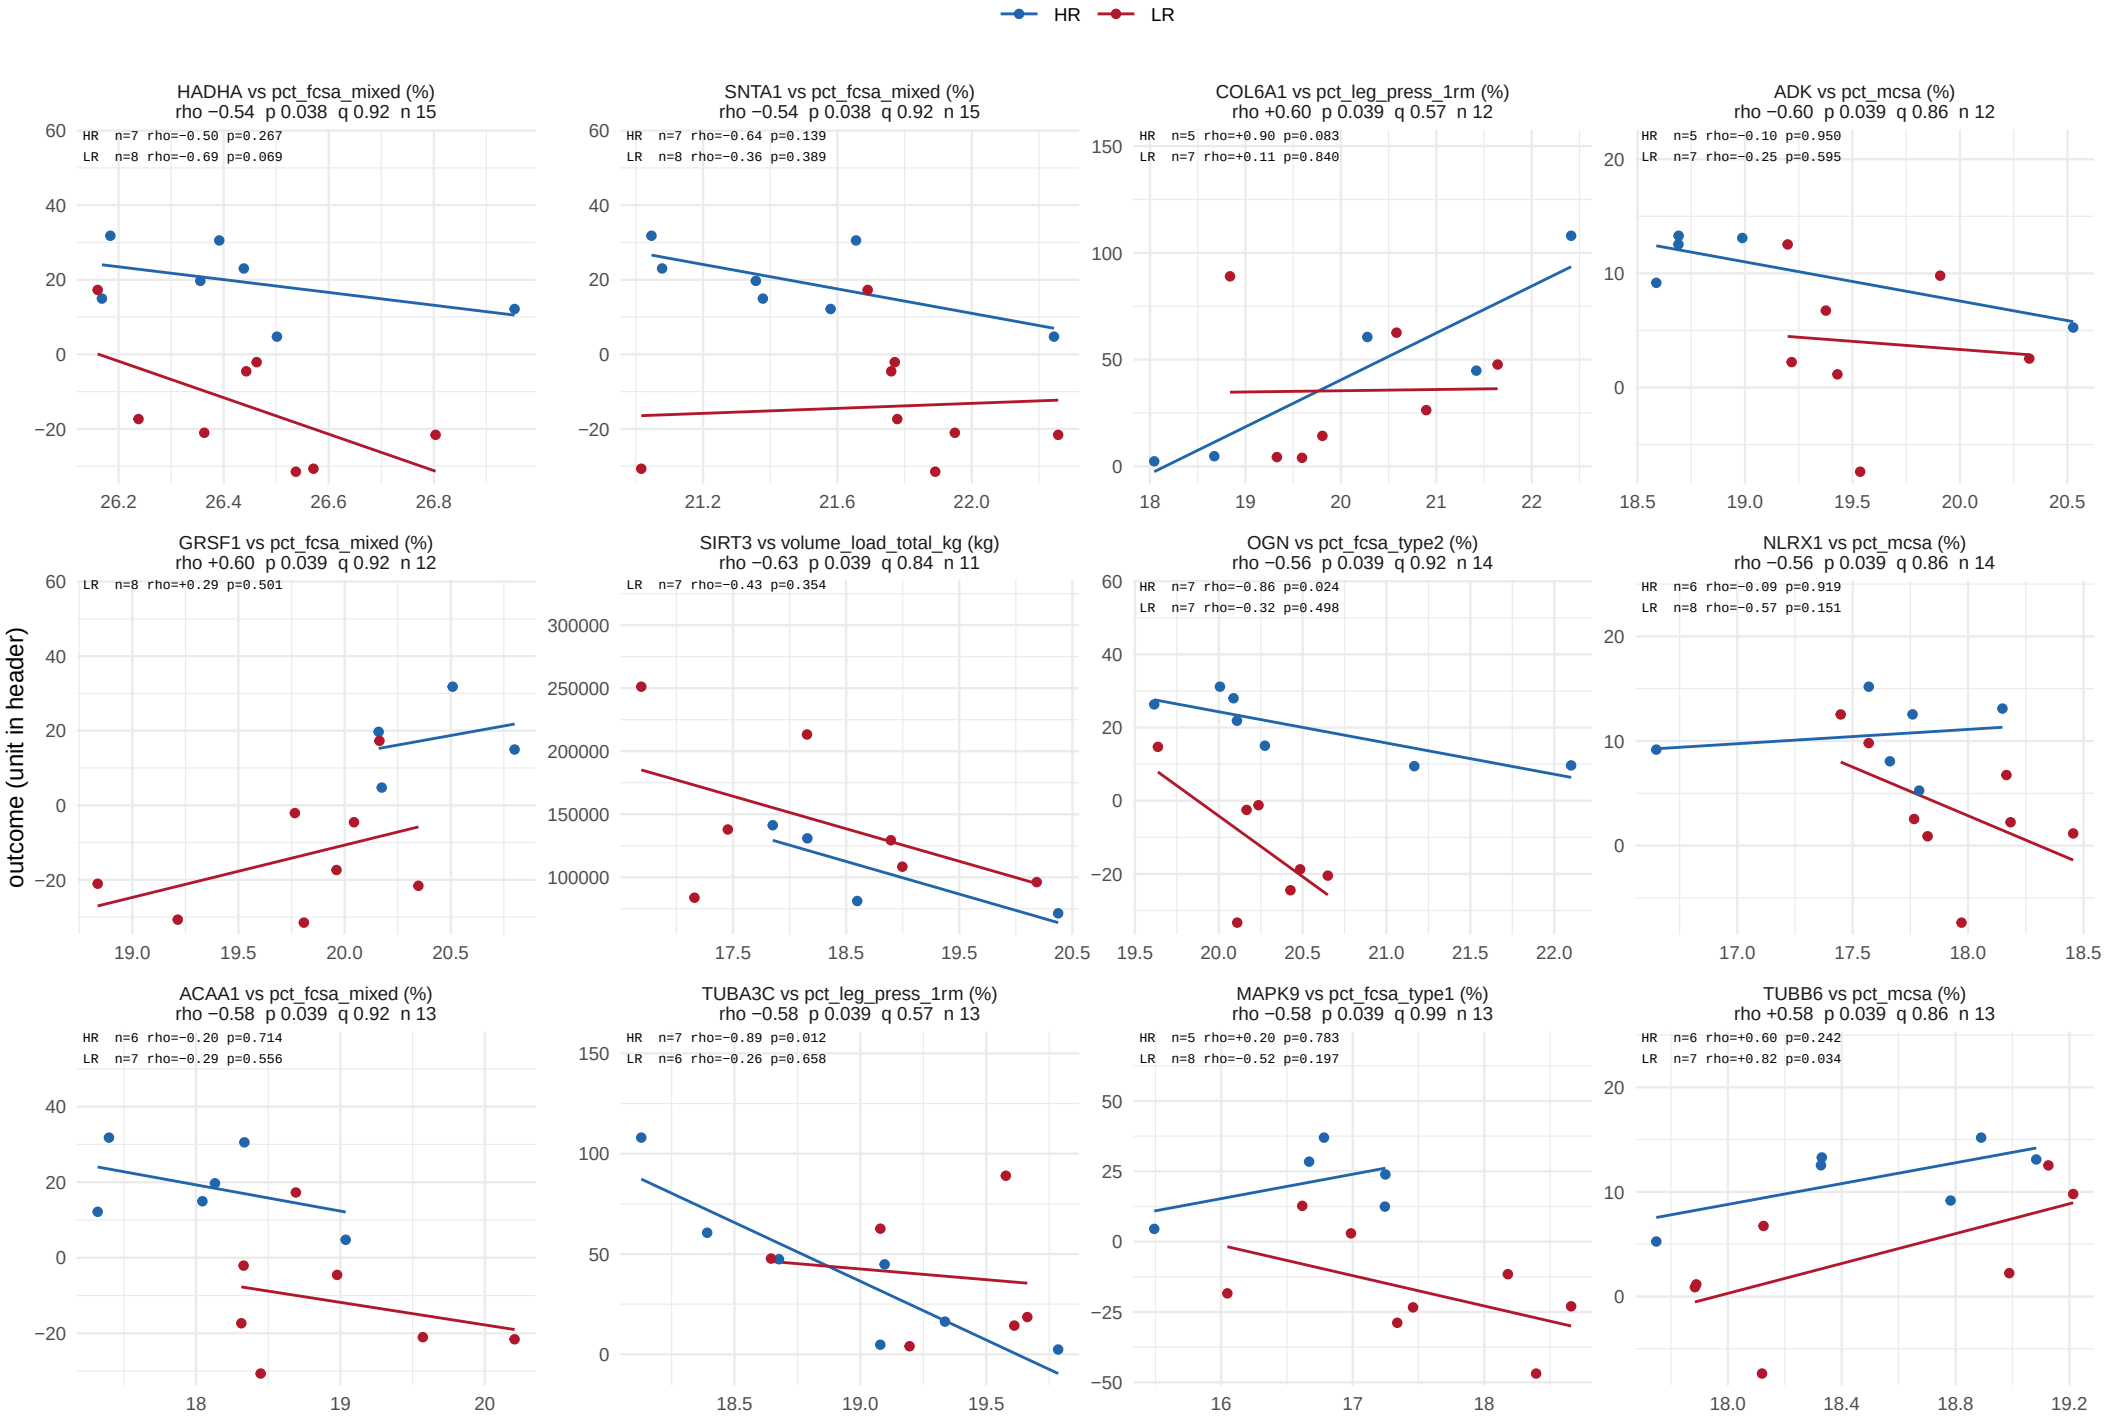

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


673 of 12553 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 44 of 57.

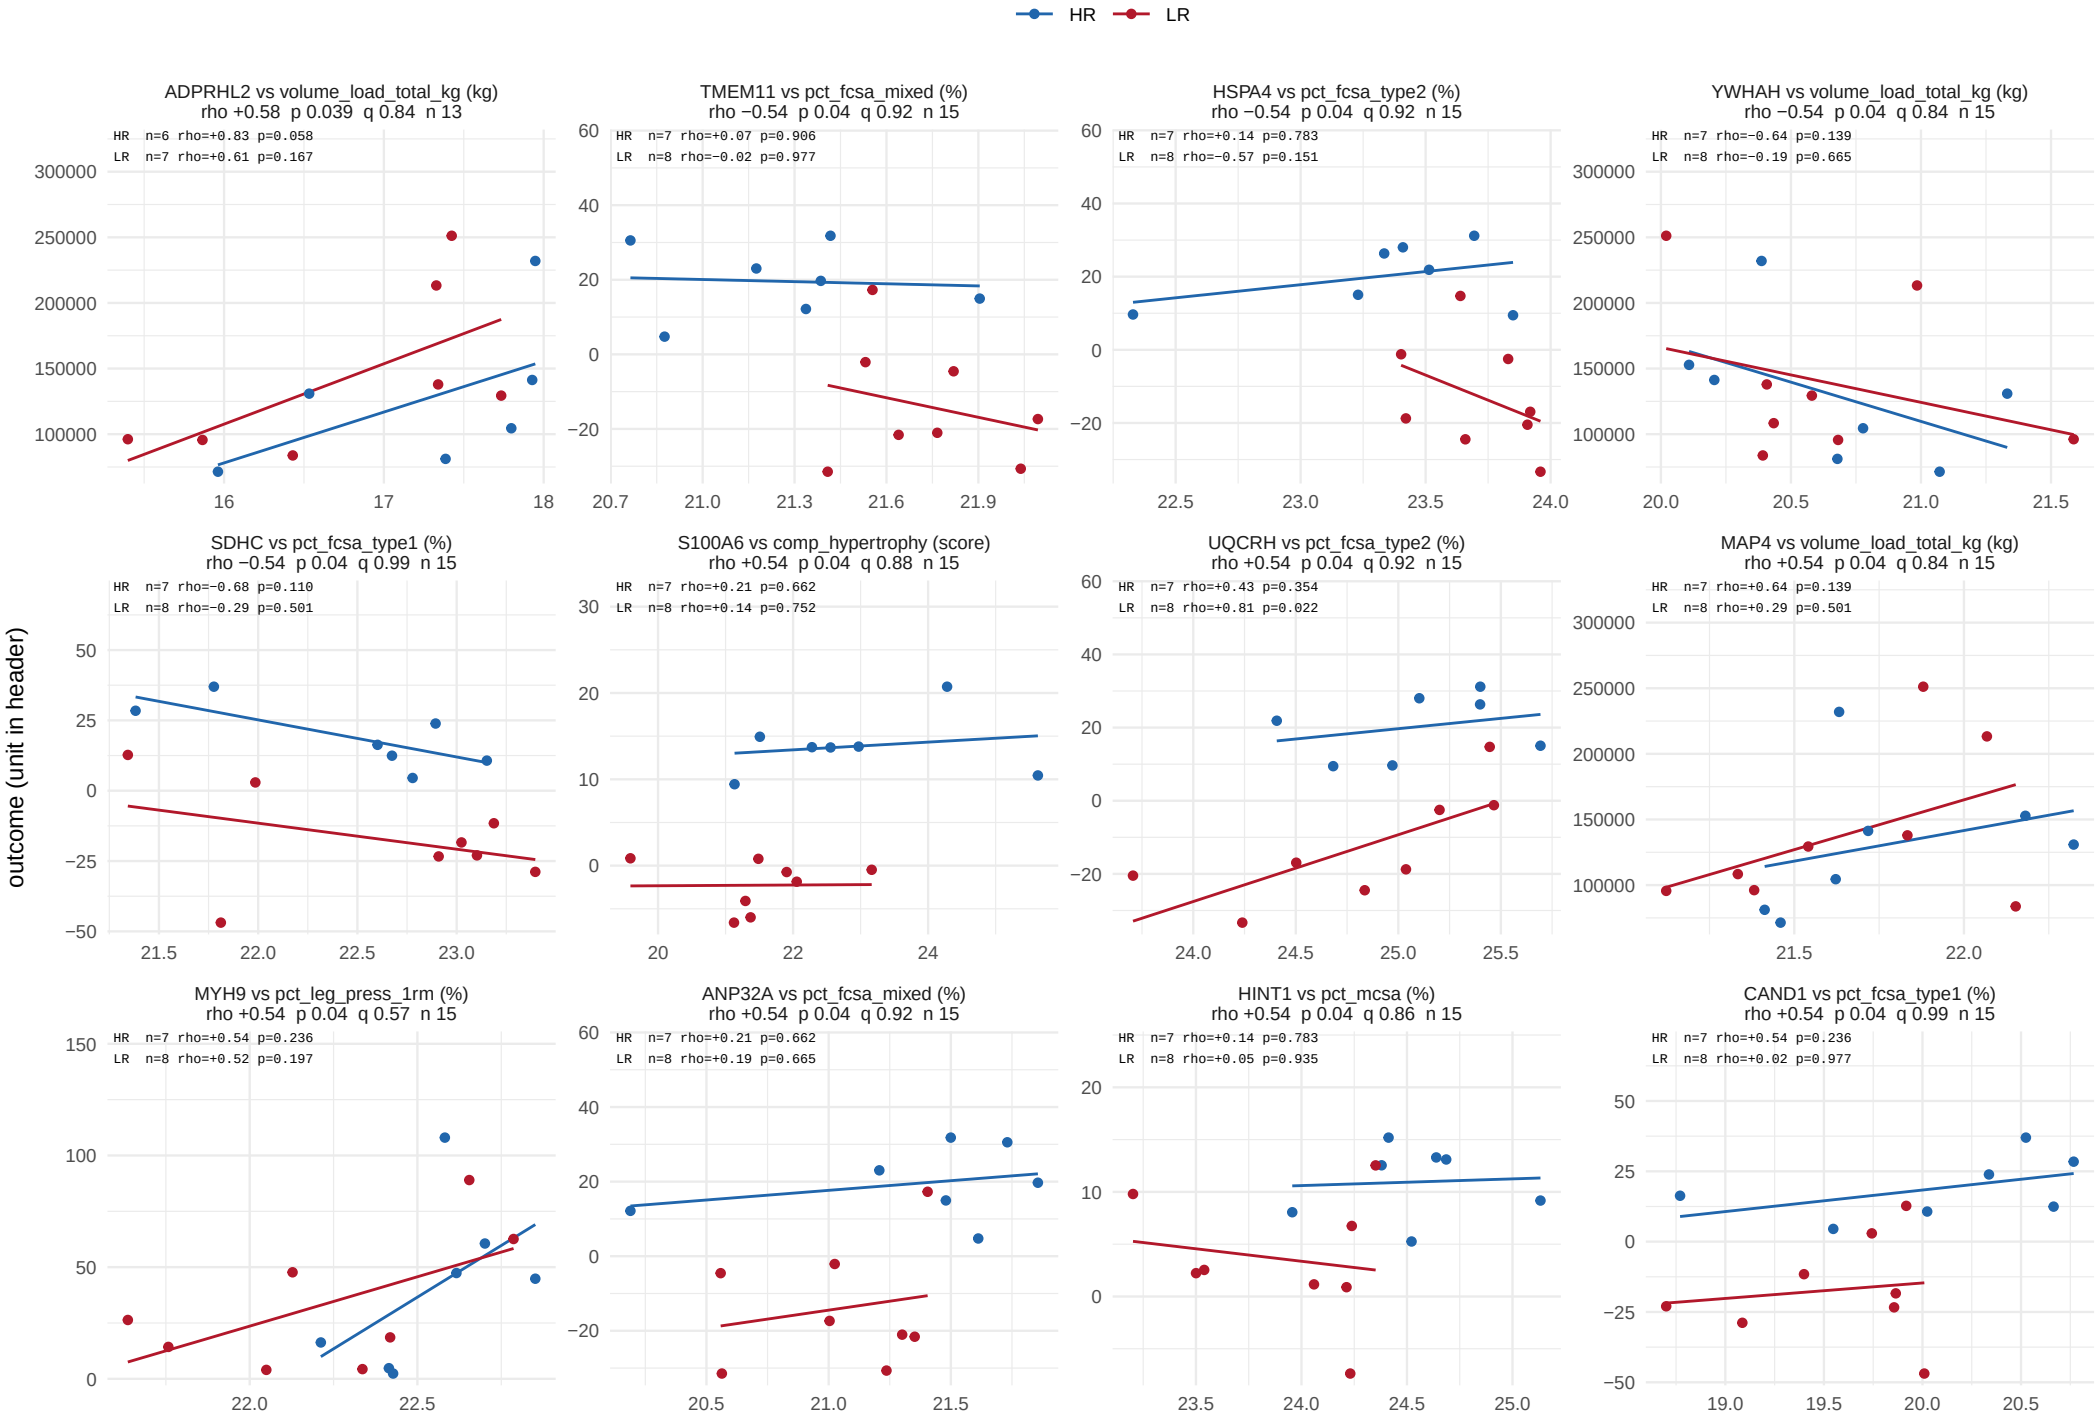

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


673 of 12553 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 45 of 57.

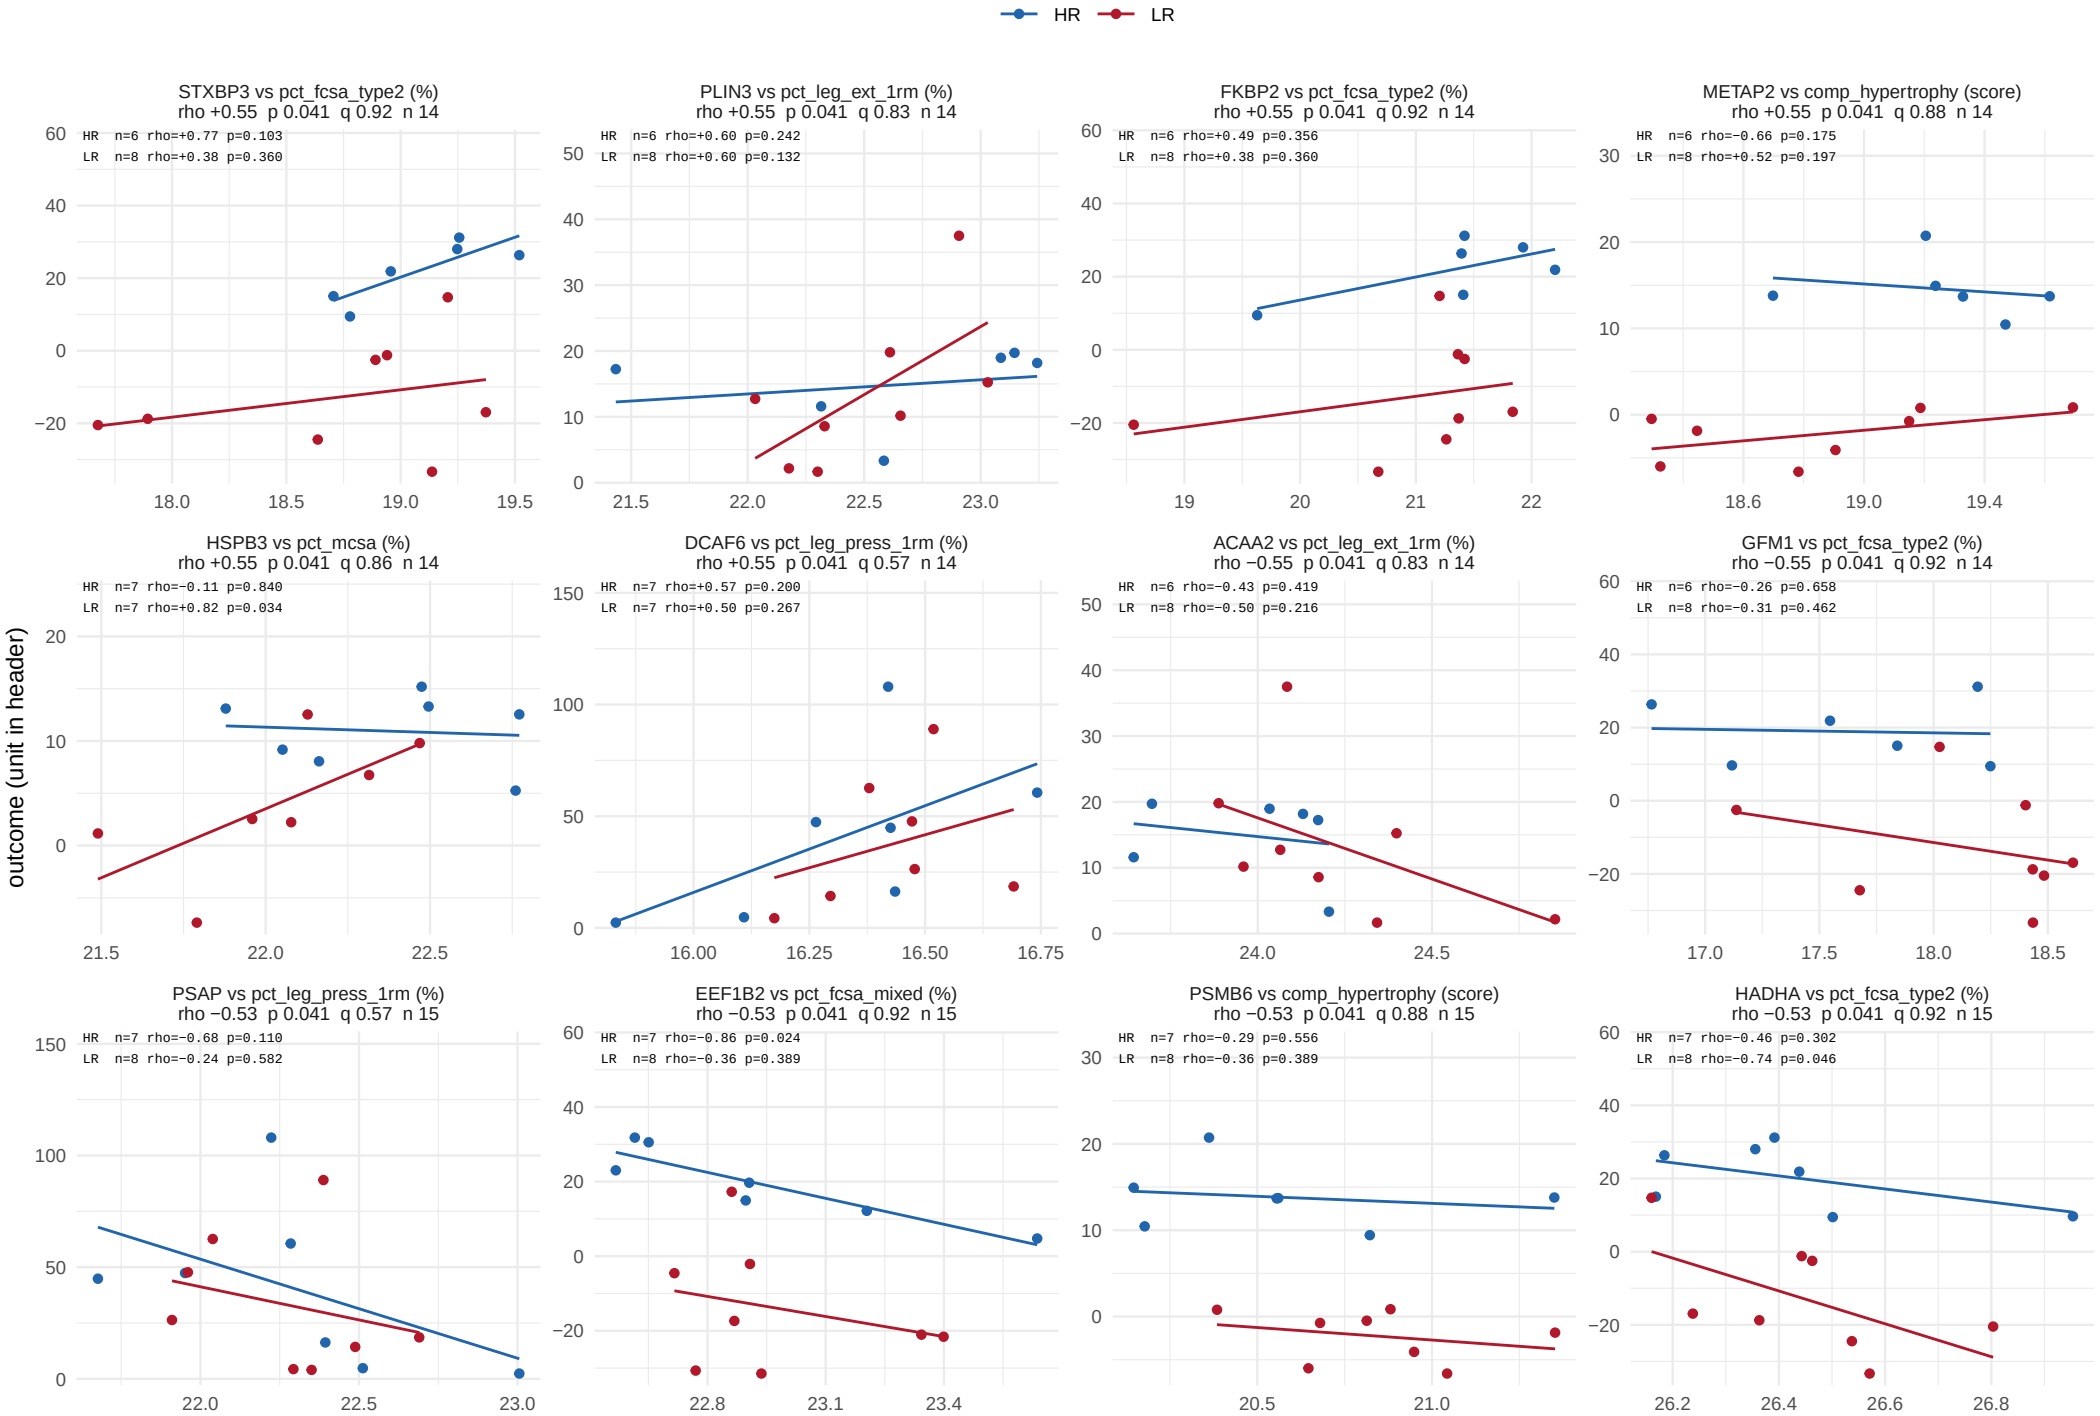

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


673 of 12553 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 46 of 57.

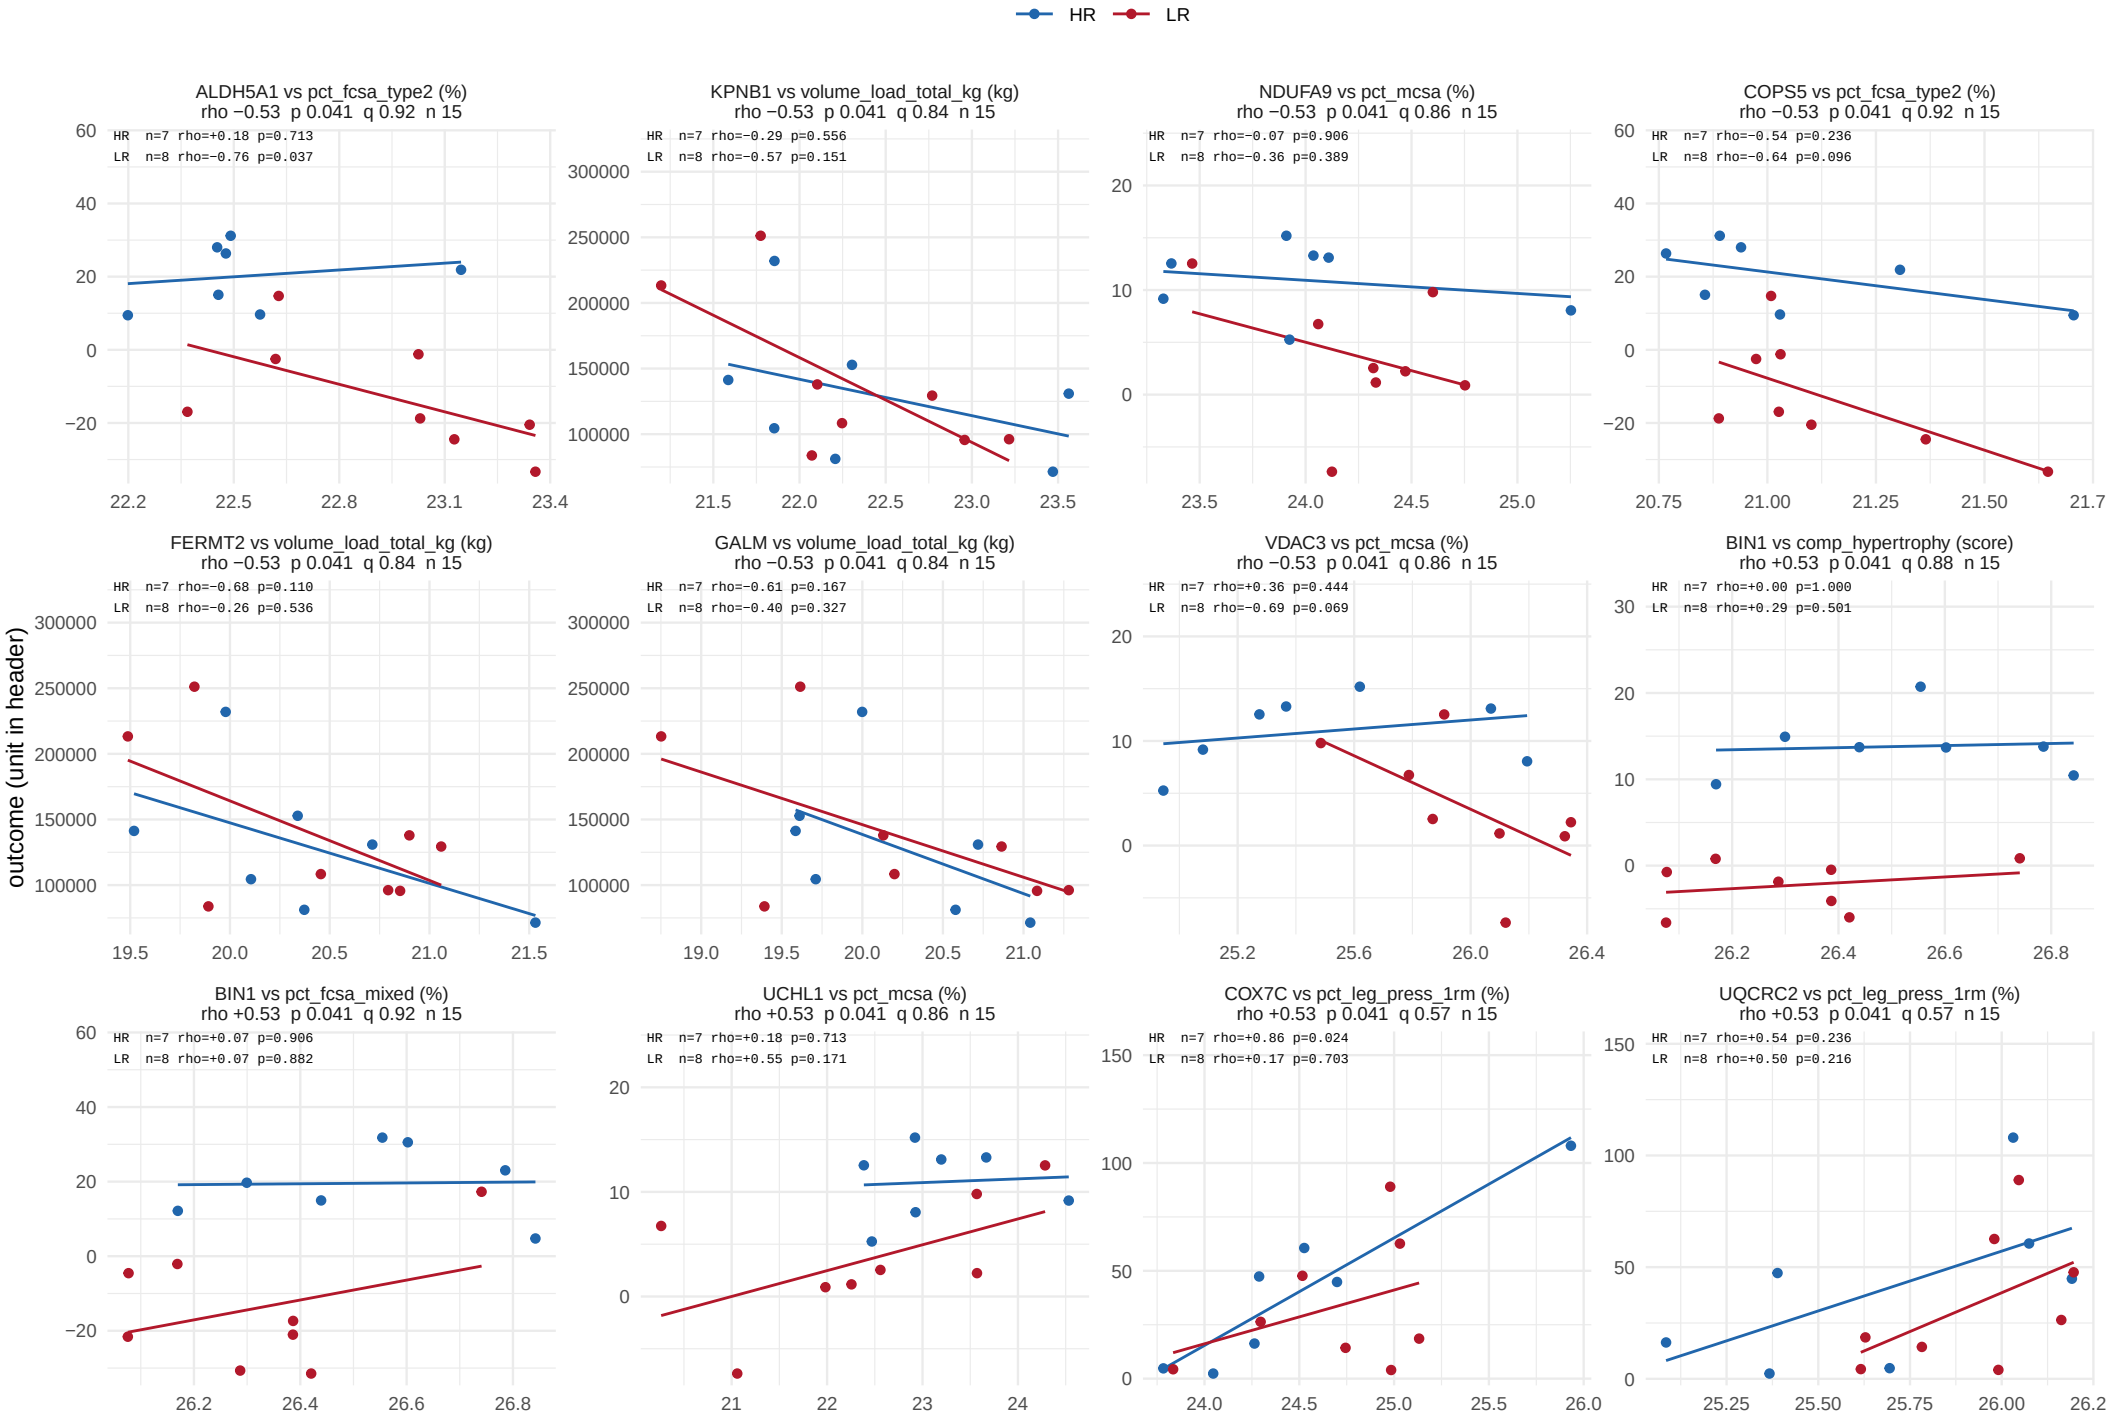

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


673 of 12553 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 47 of 57.

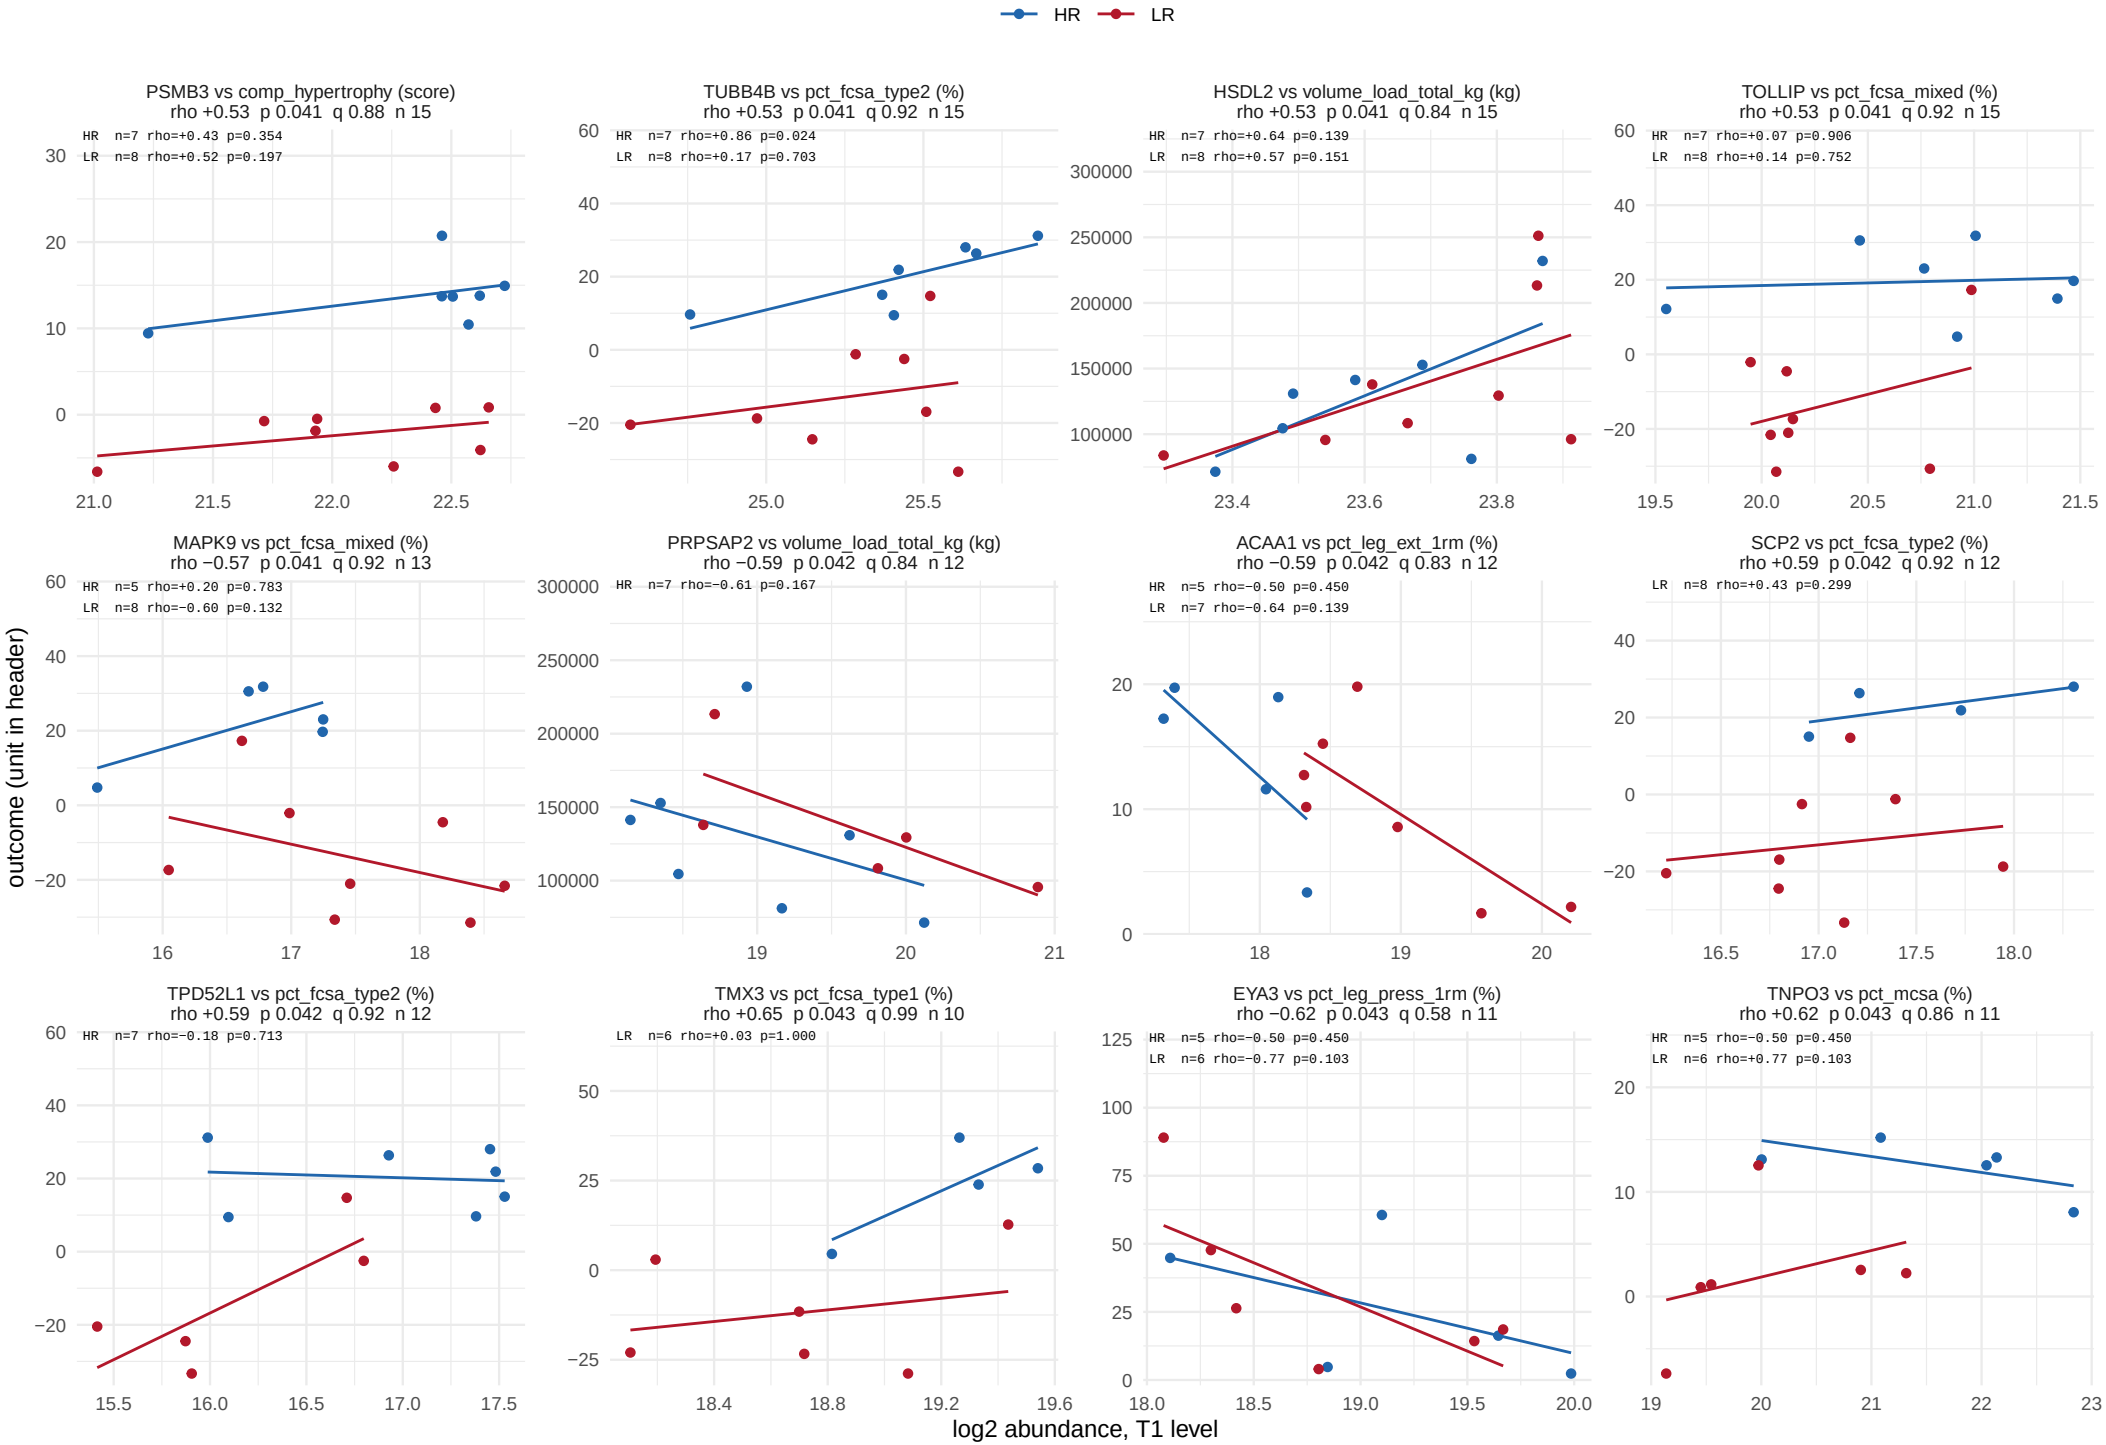

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


673 of 12553 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 48 of 57.

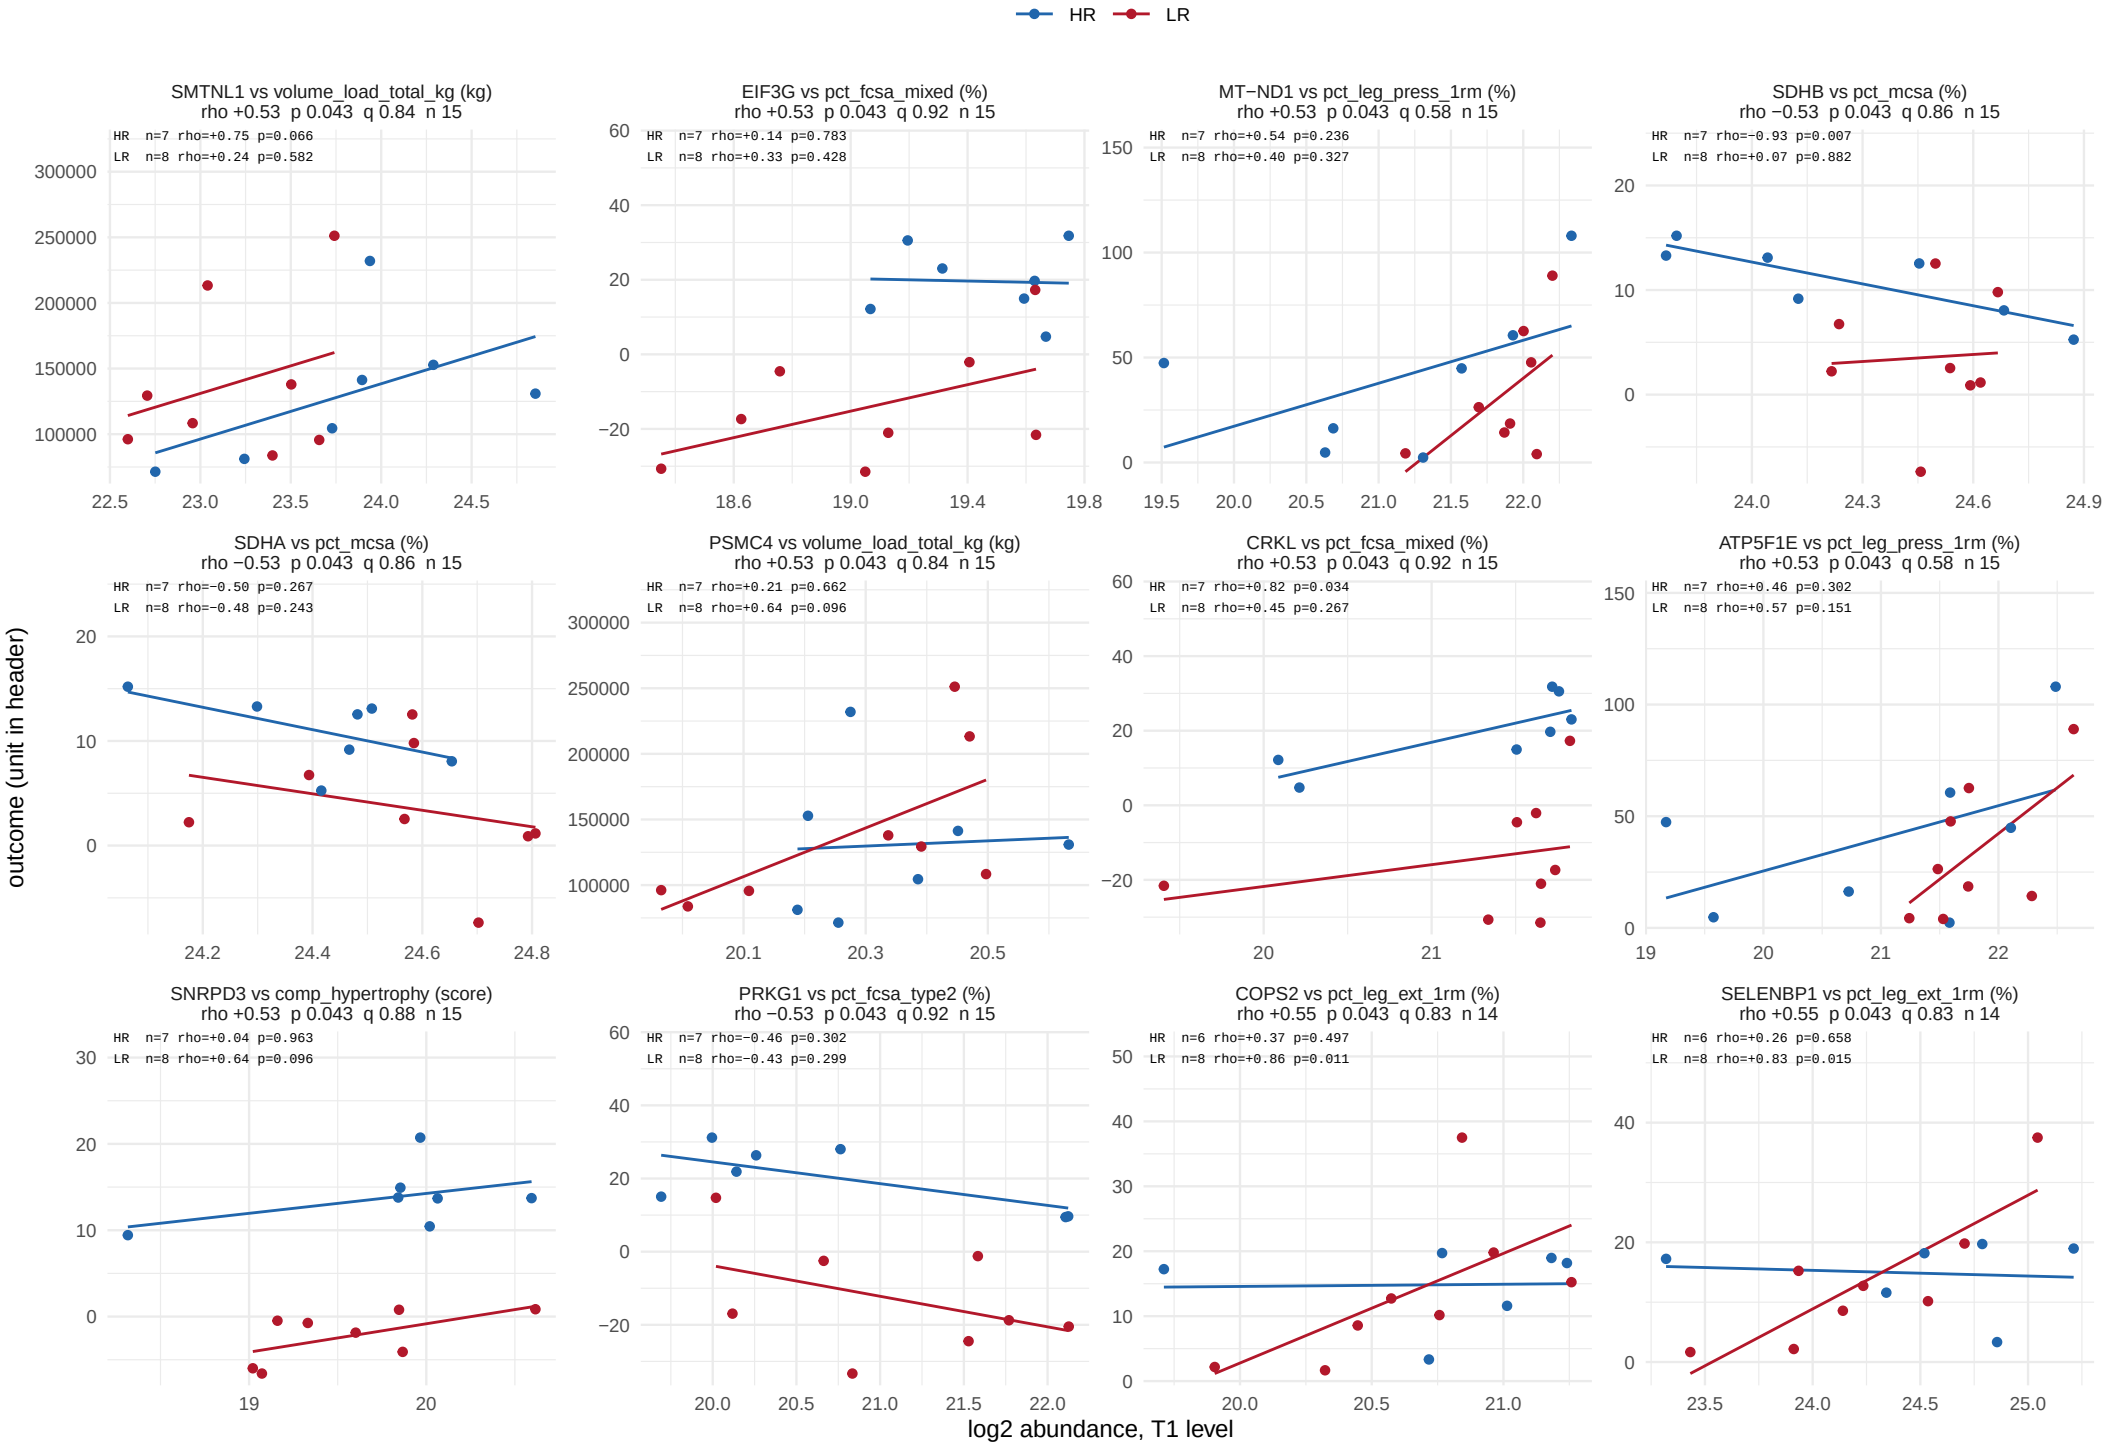

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


673 of 12553 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 49 of 57.

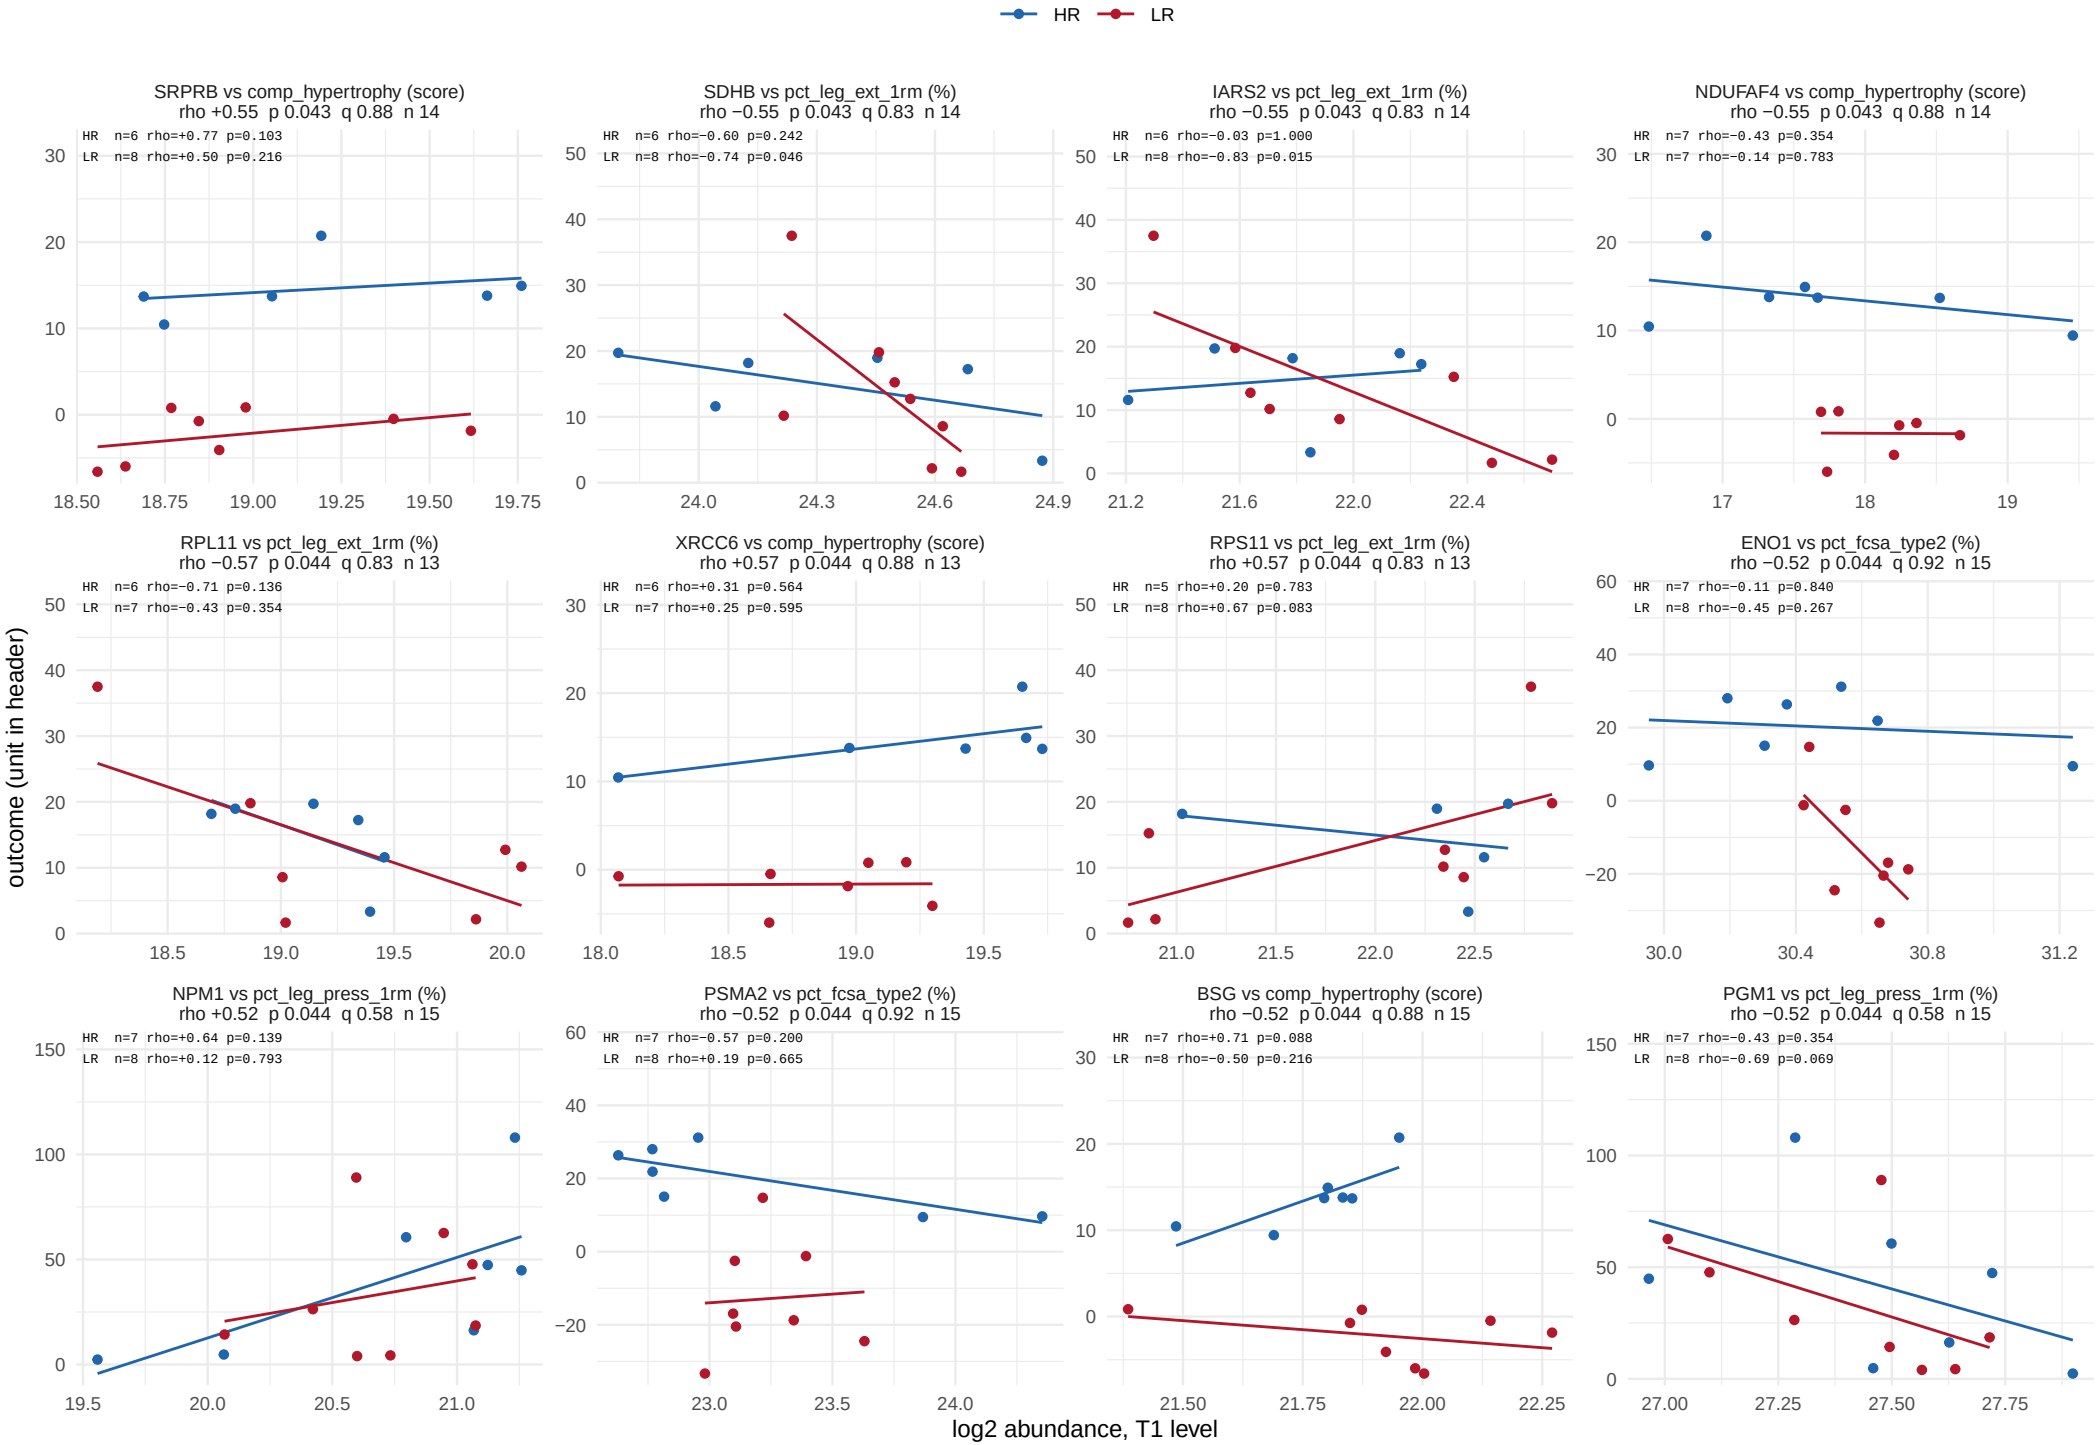

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


673 of 12553 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 50 of 57.

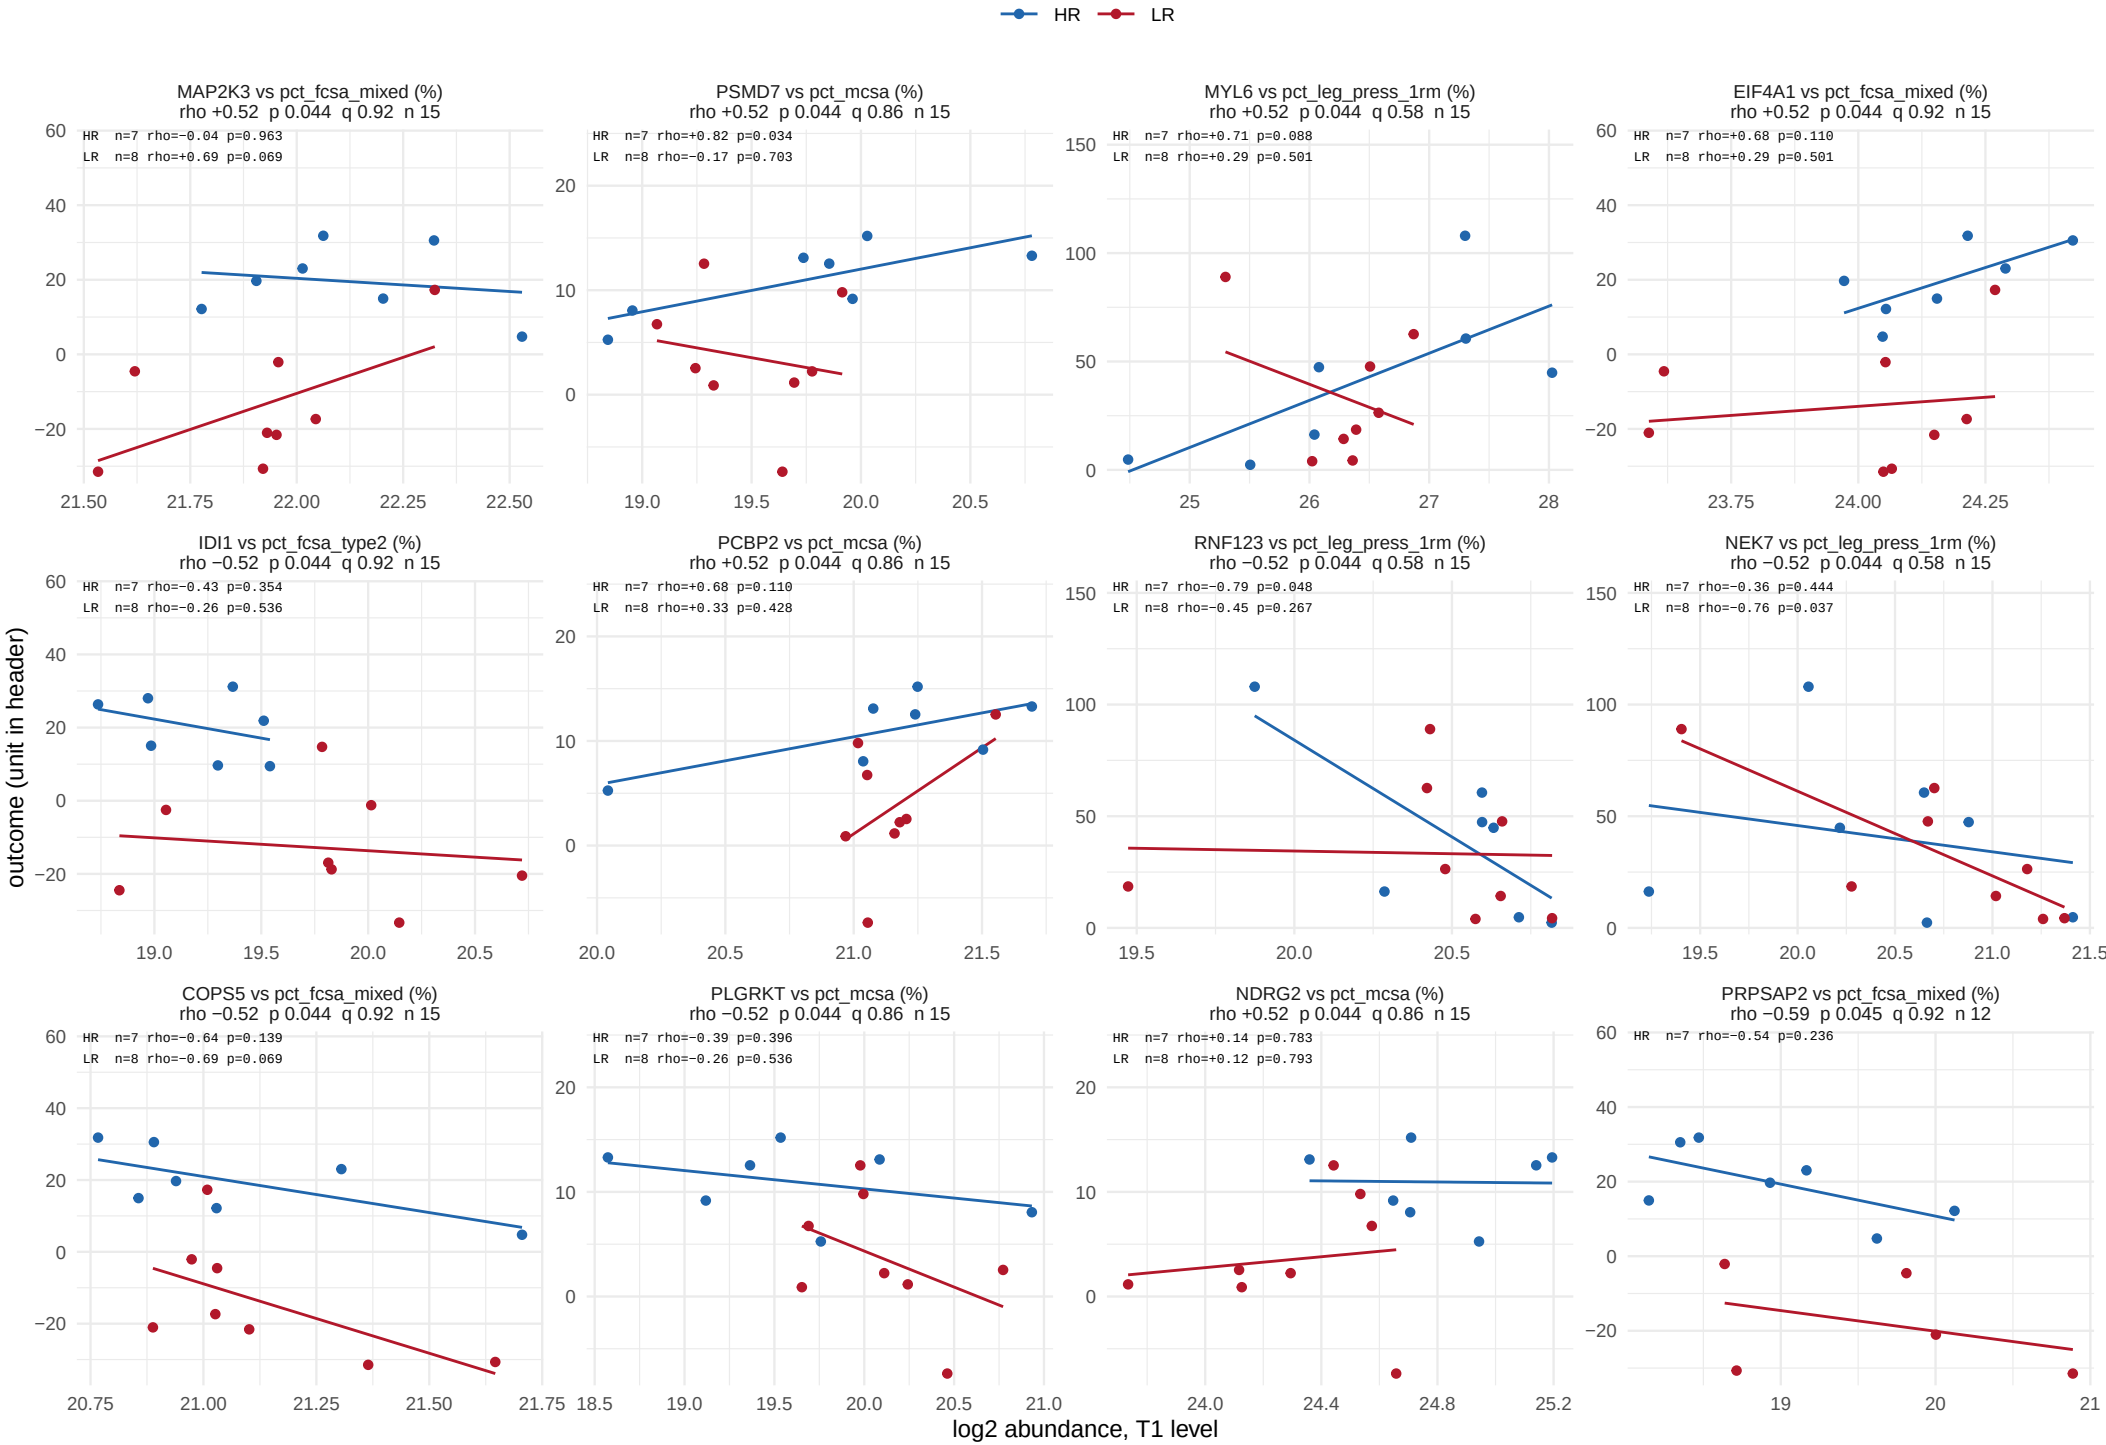

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


673 of 12553 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 51 of 57.

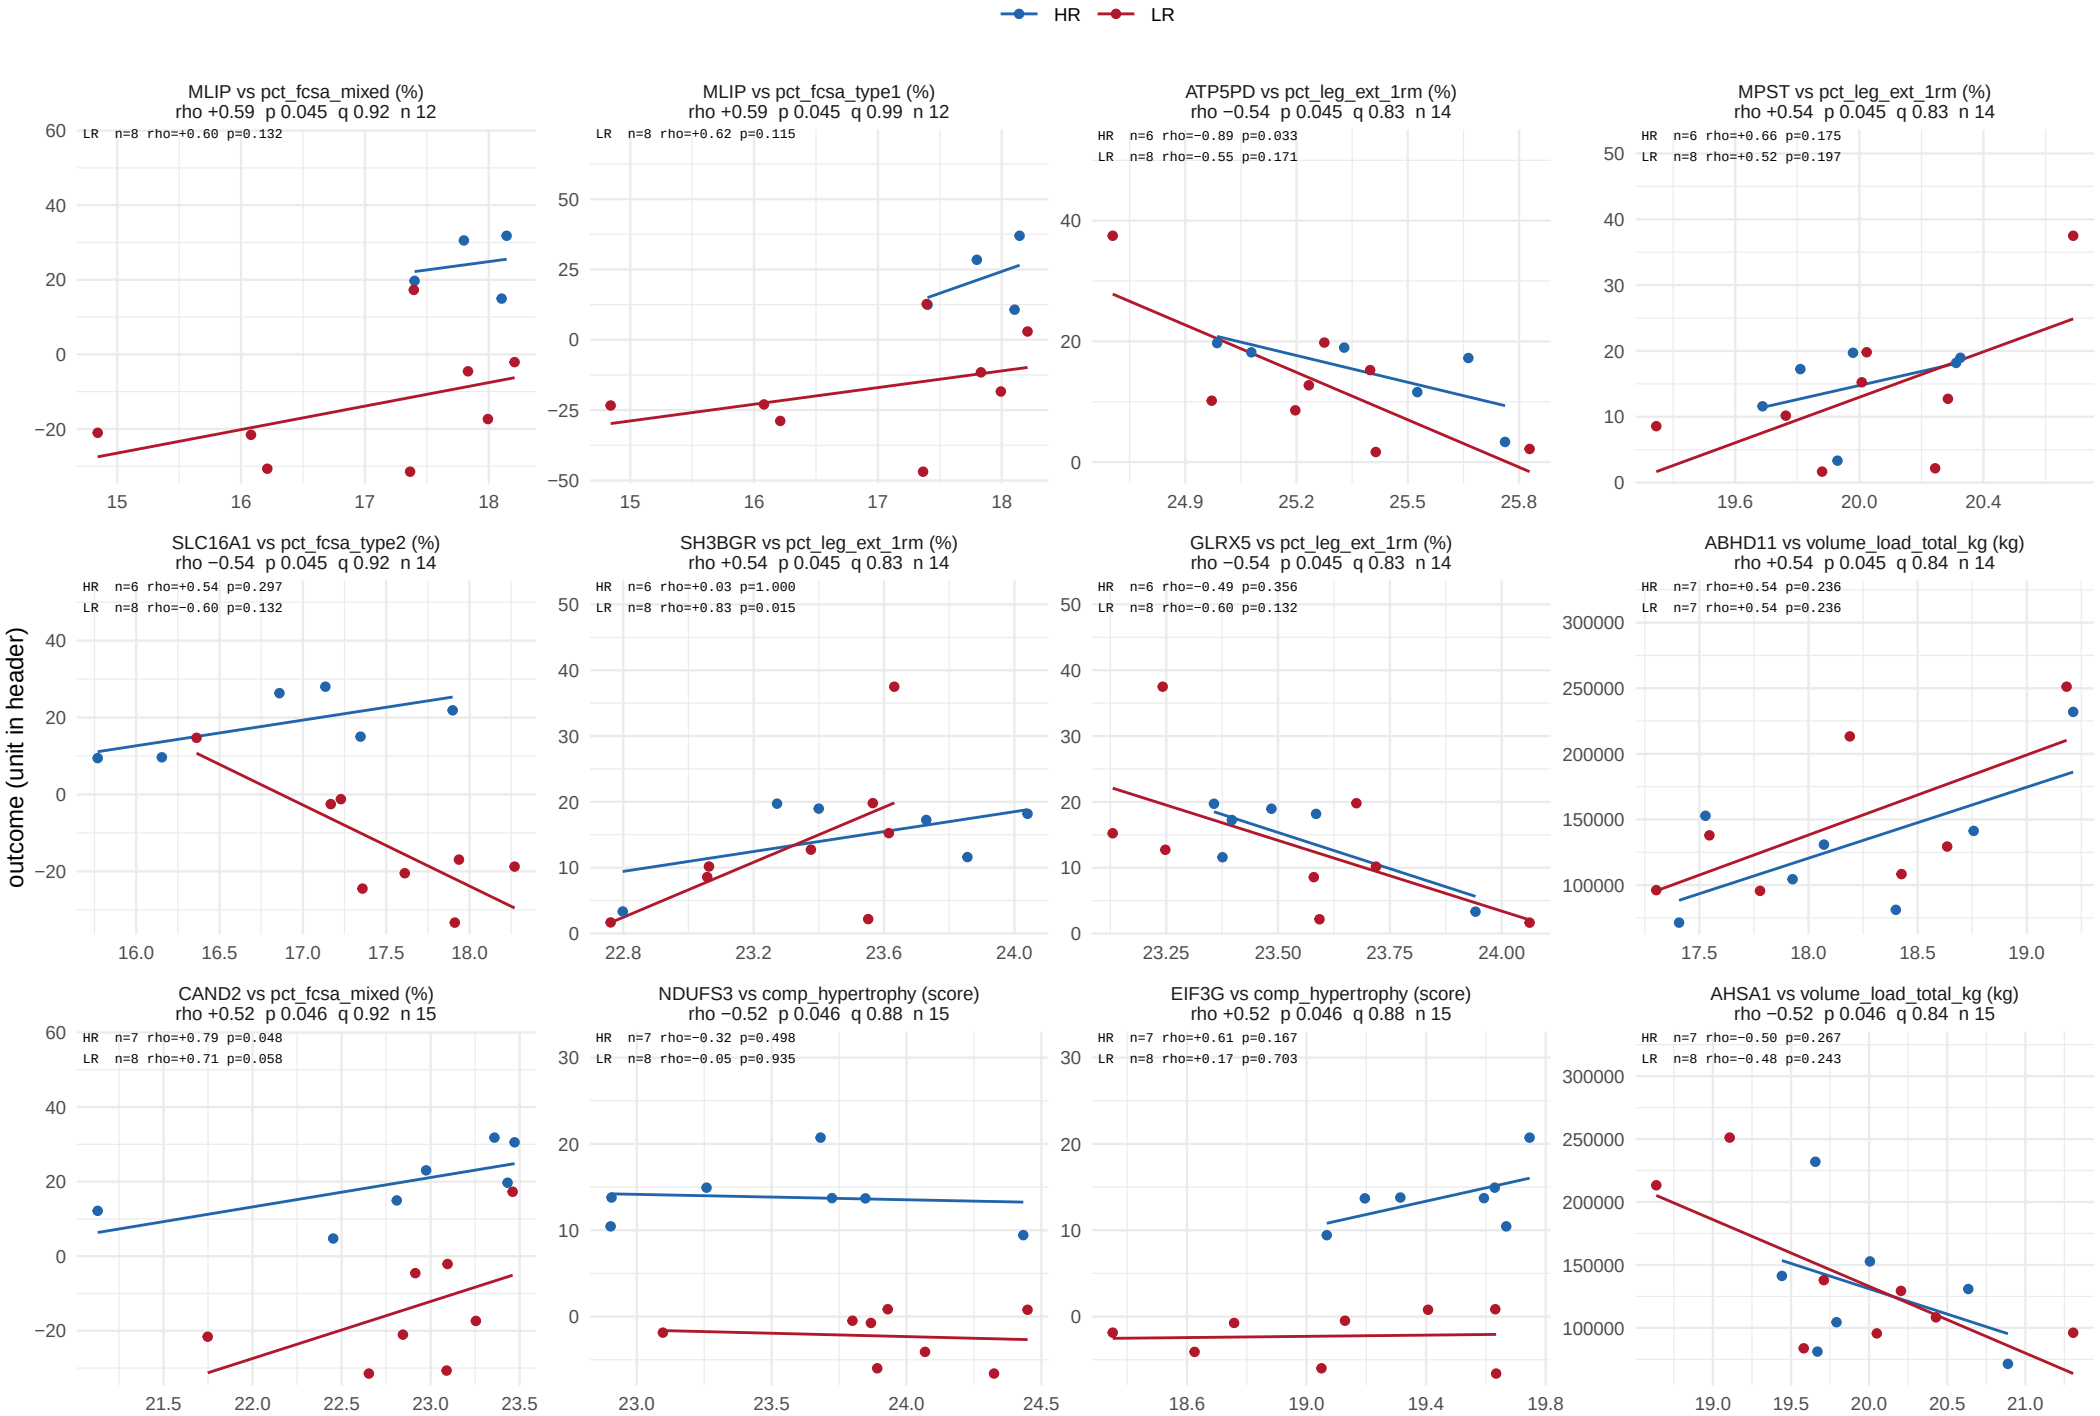

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


673 of 12553 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 52 of 57.

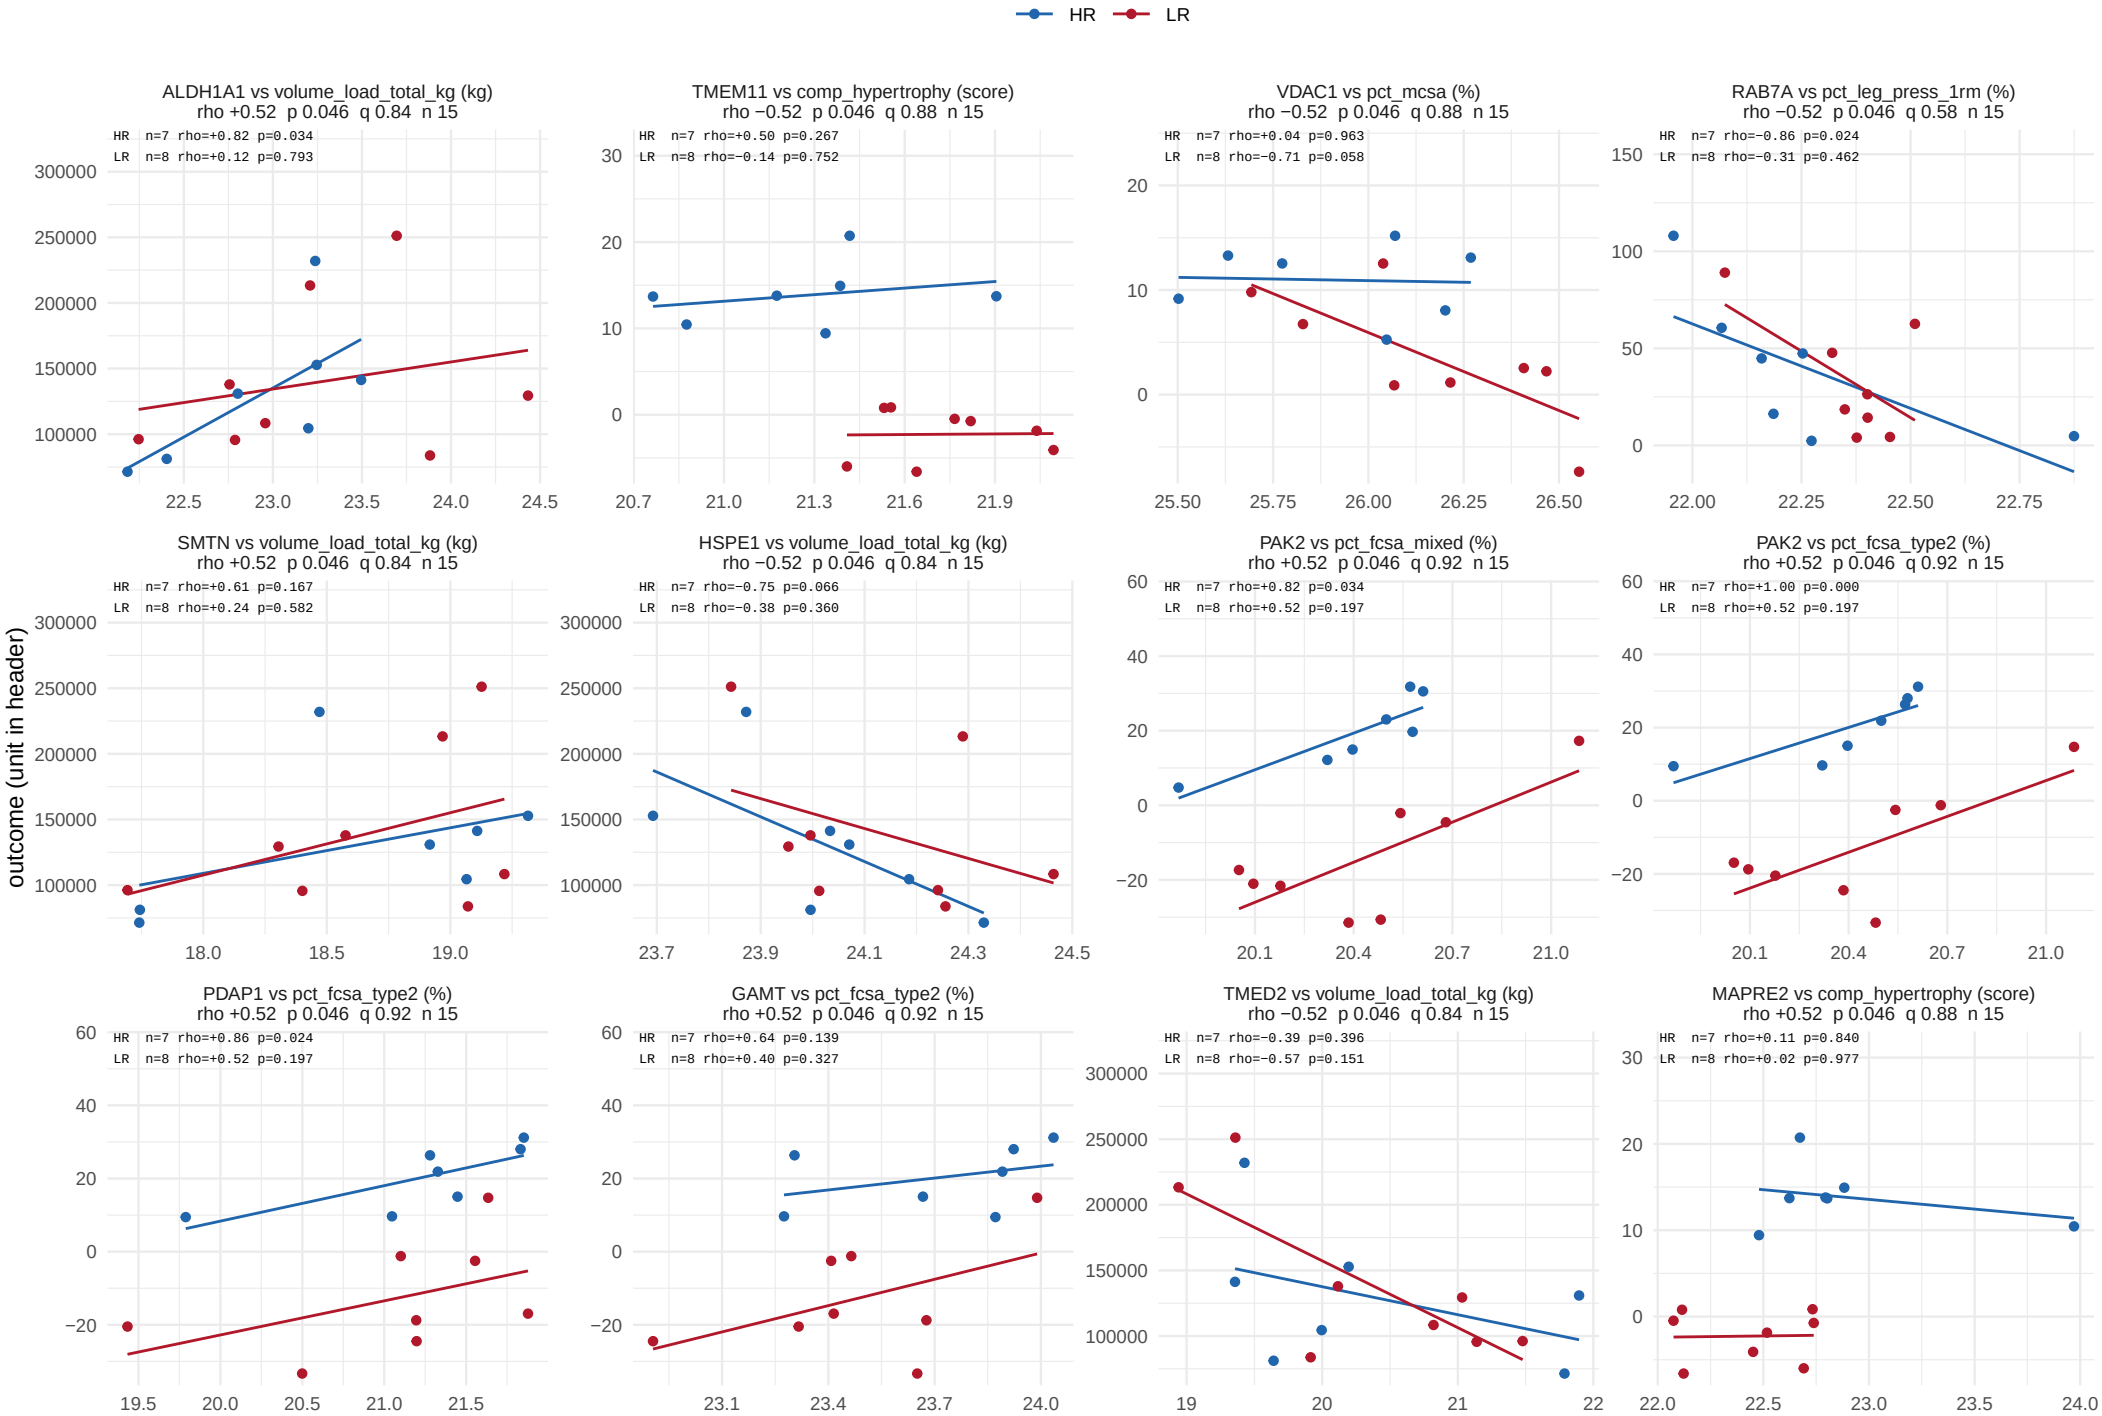

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


673 of 12553 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 53 of 57.

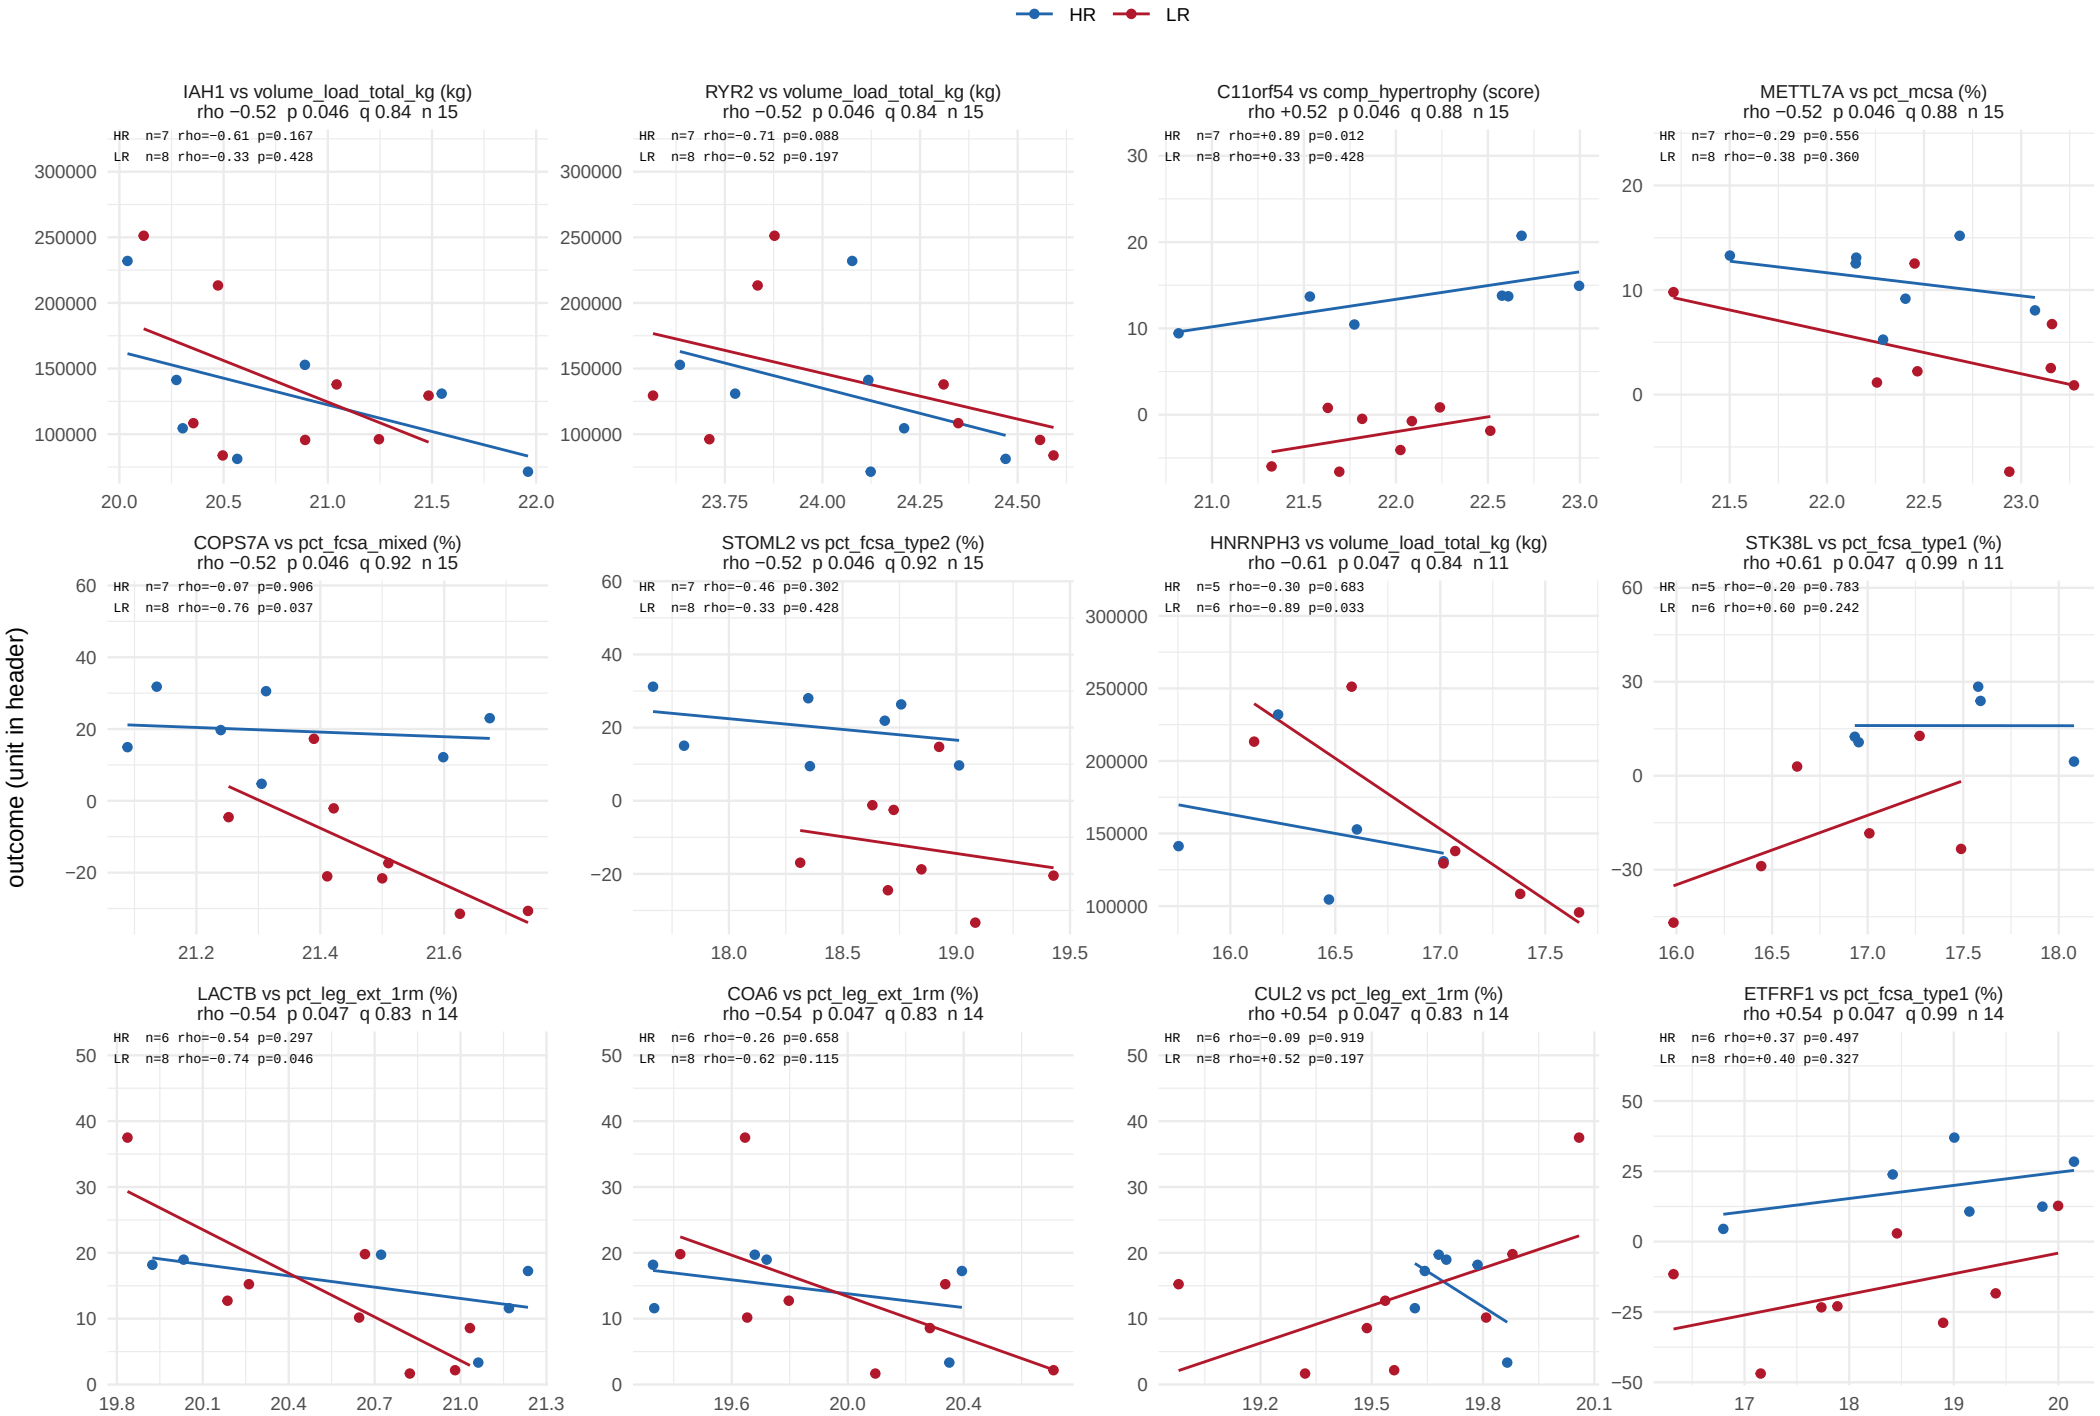

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


673 of 12553 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 54 of 57.

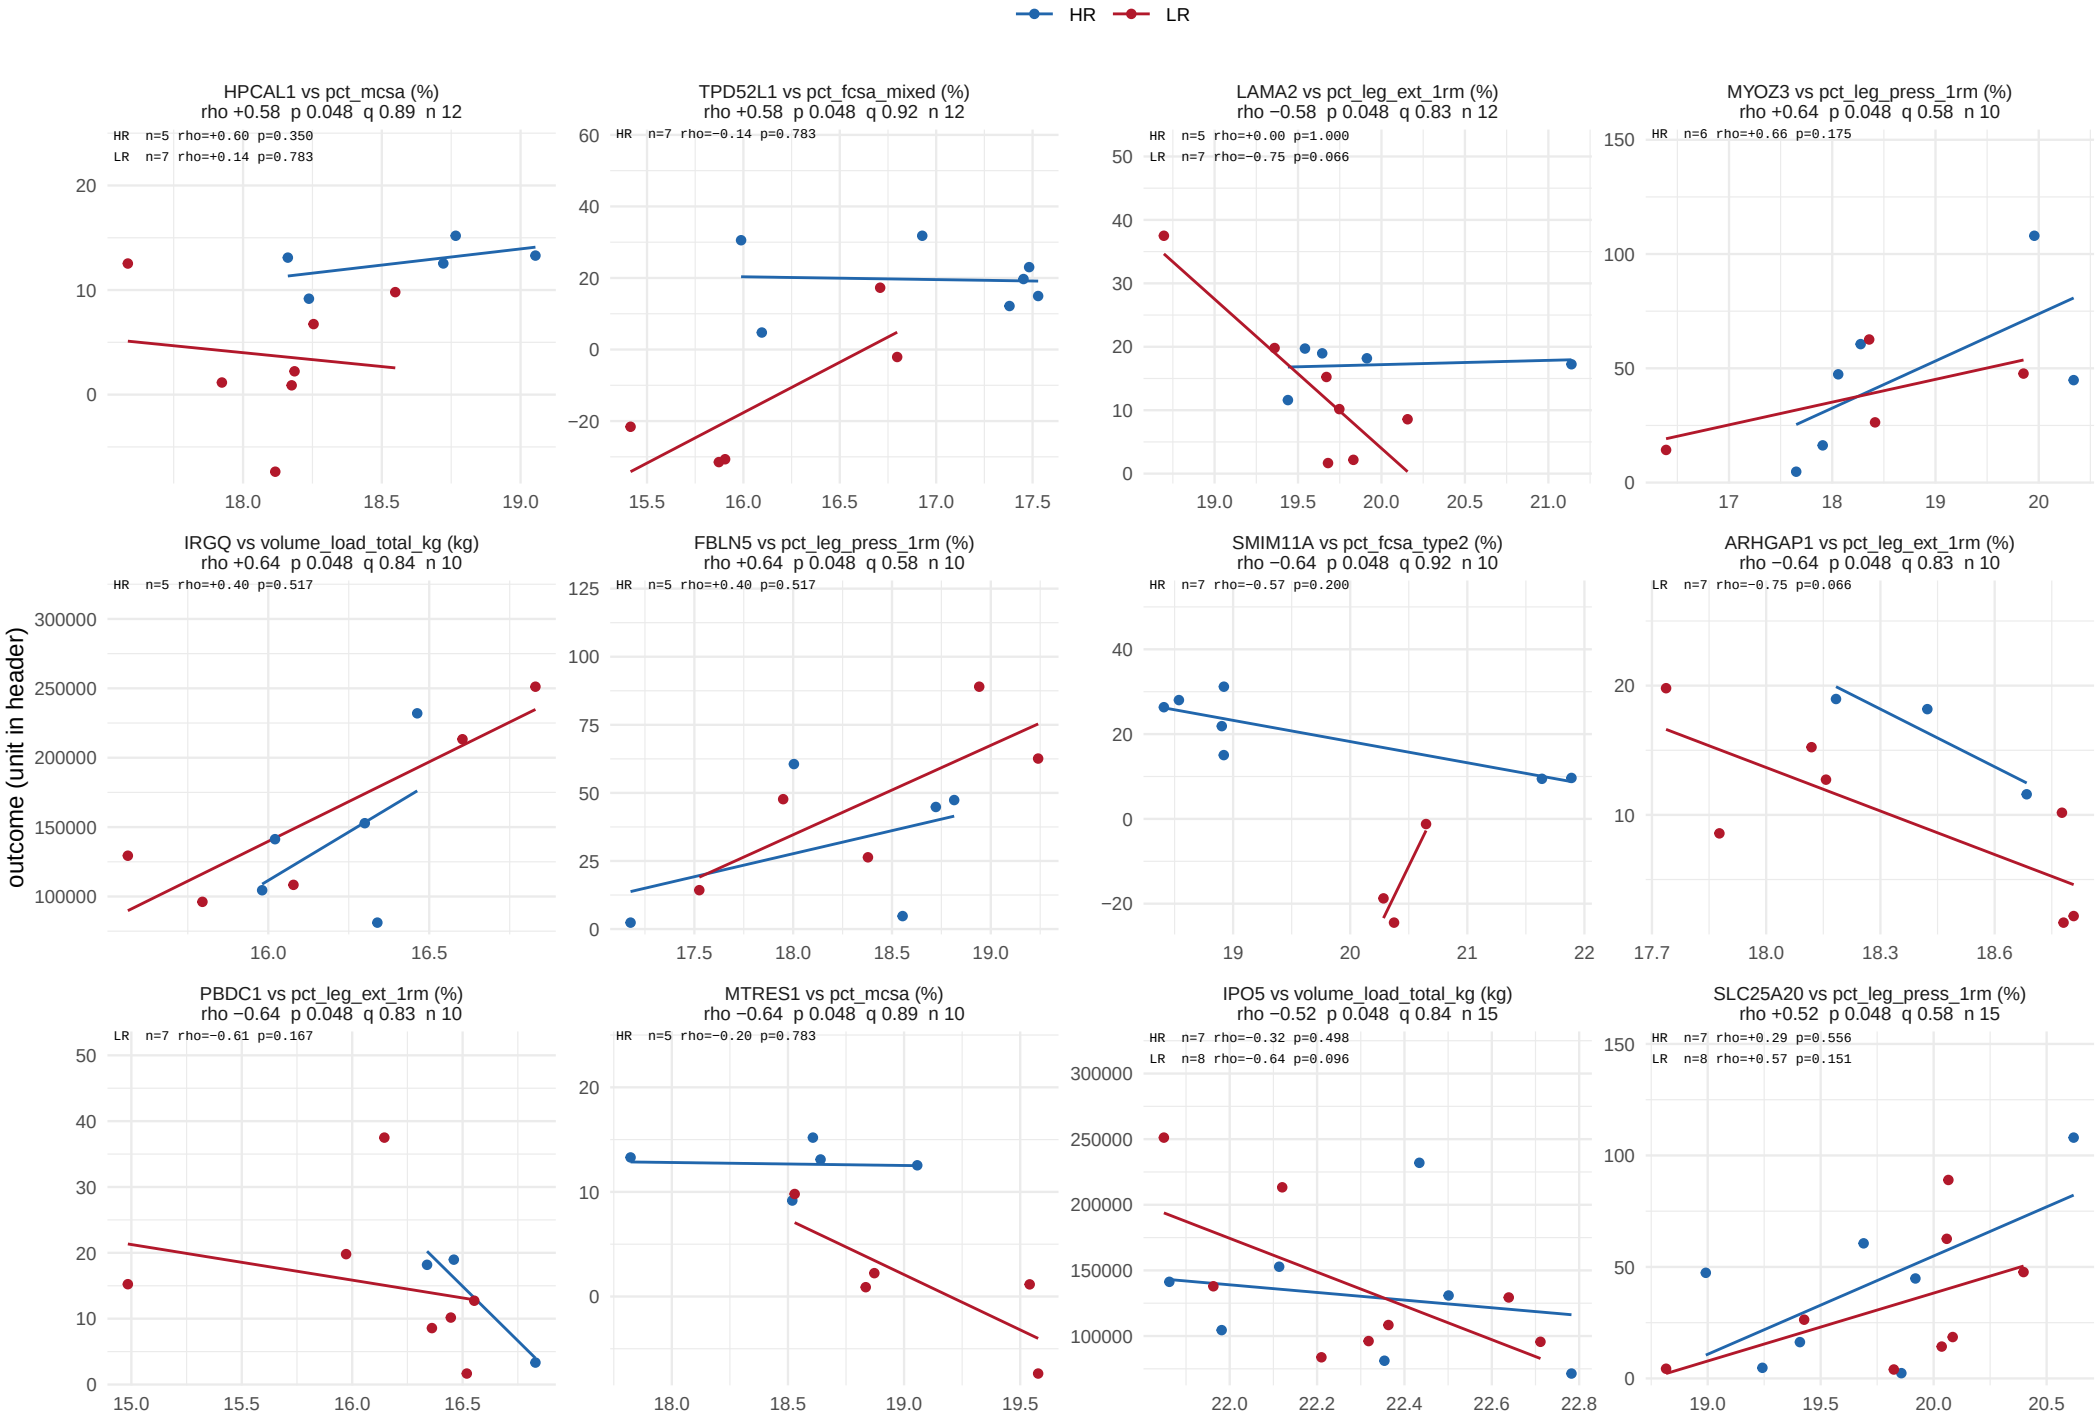

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


673 of 12553 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 55 of 57.

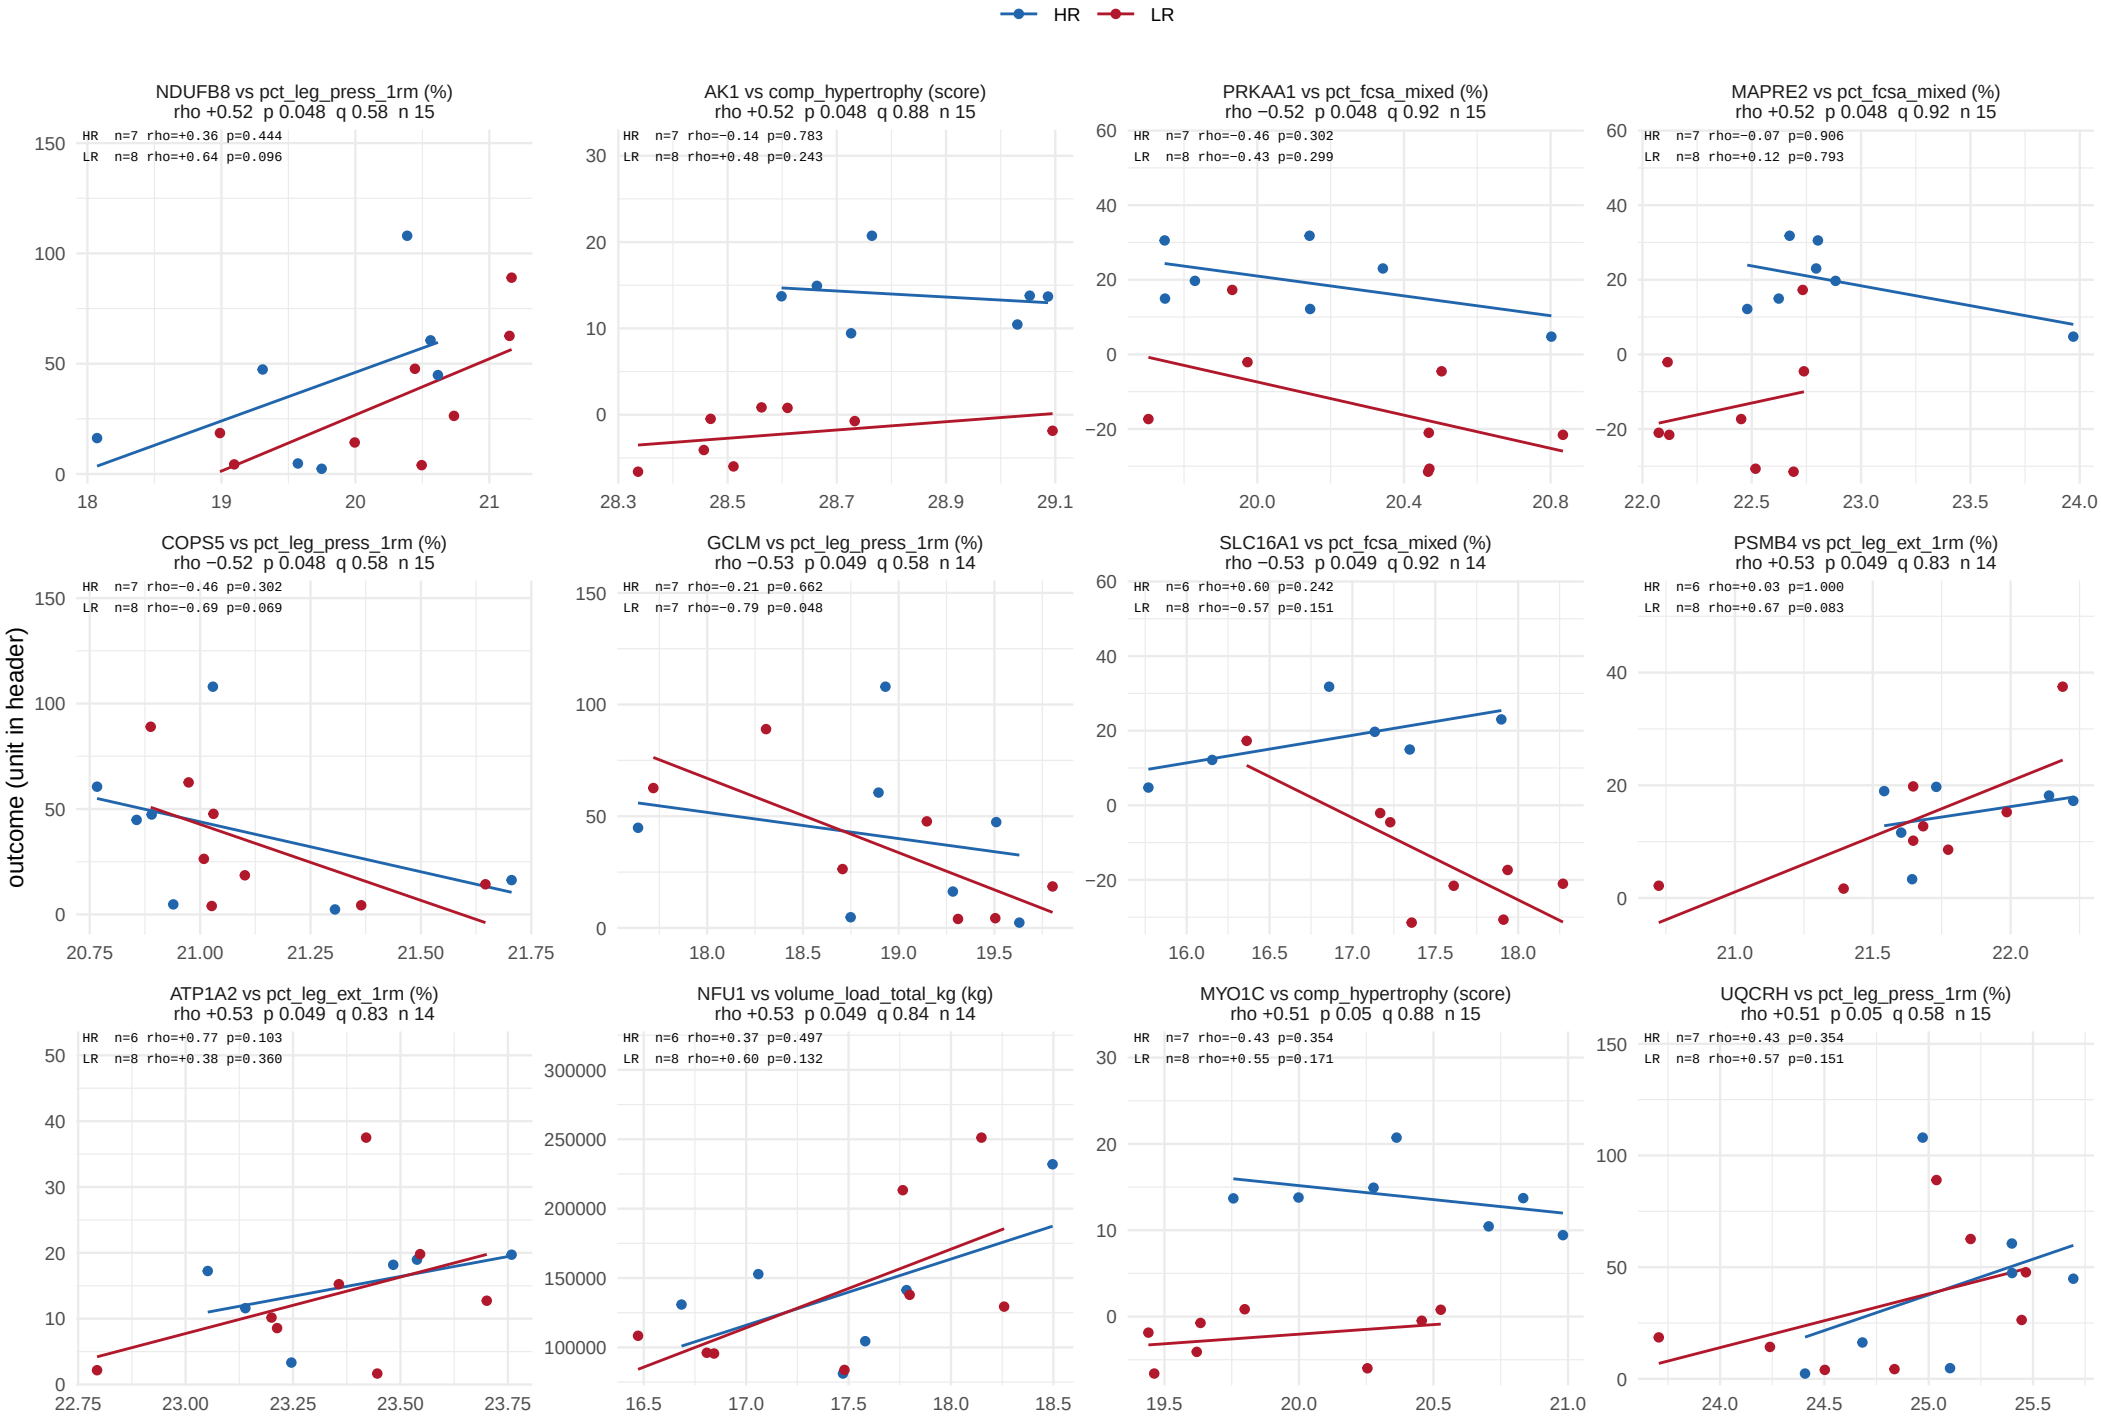

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


673 of 12553 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 56 of 57.

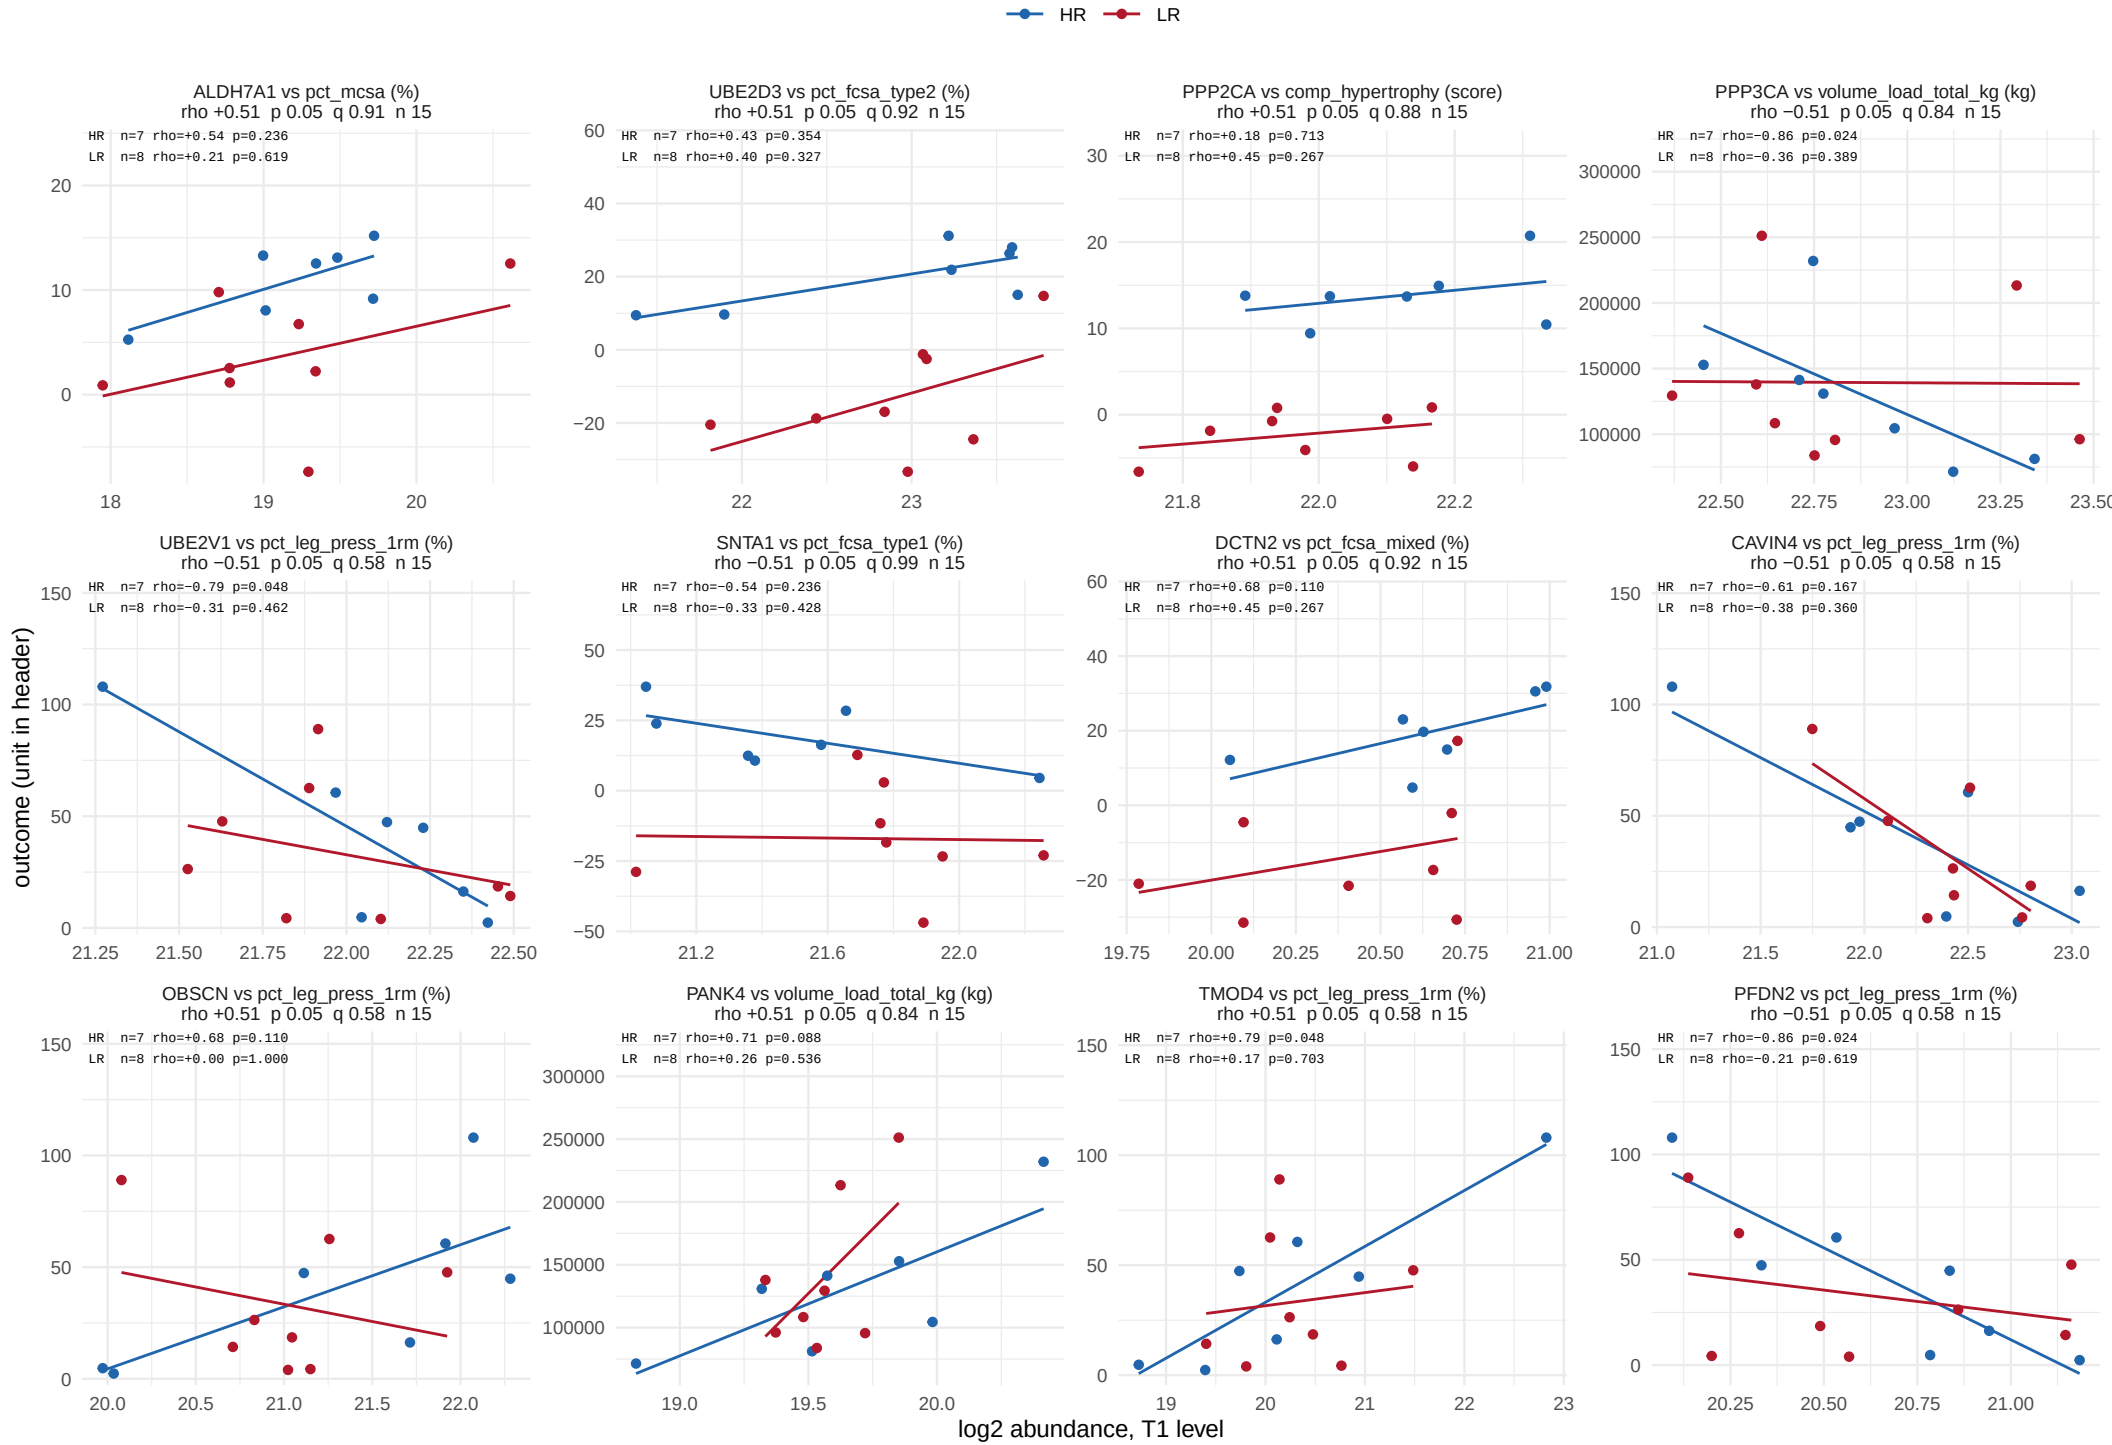

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


673 of 12553 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 57 of 57.

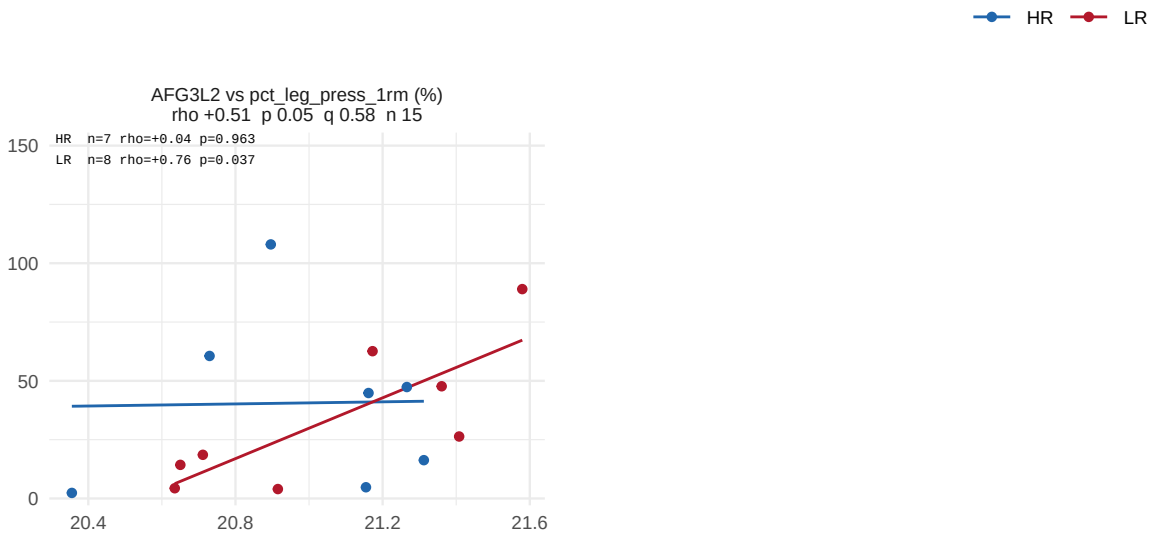

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


741 of 11747 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 1 of 62.

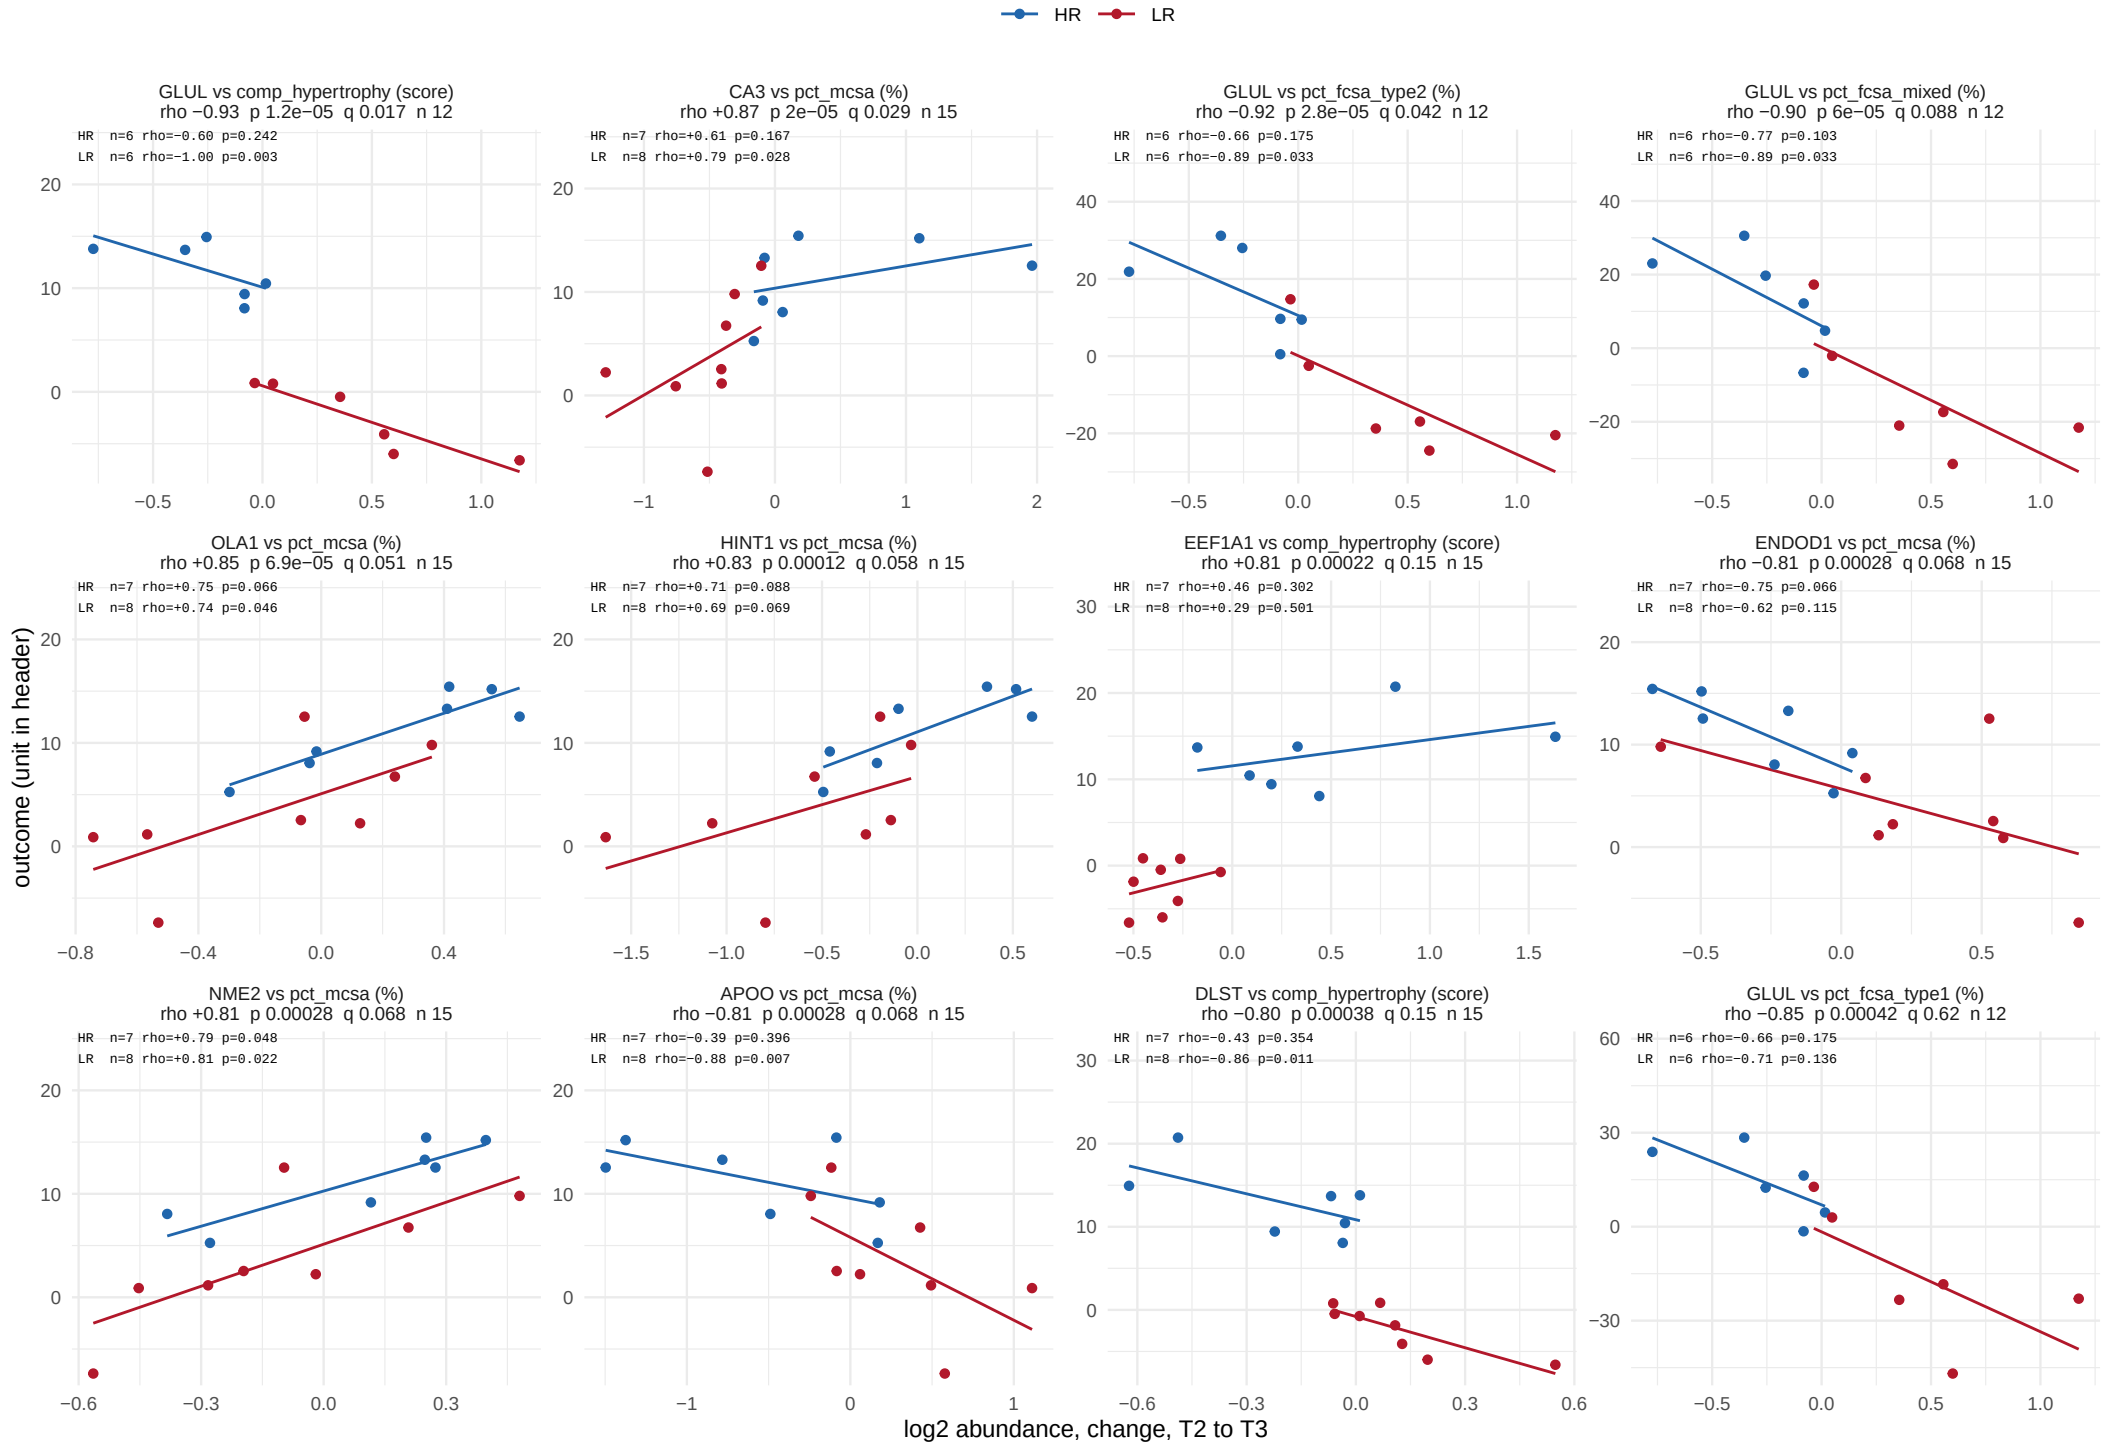

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


741 of 11747 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 2 of 62.

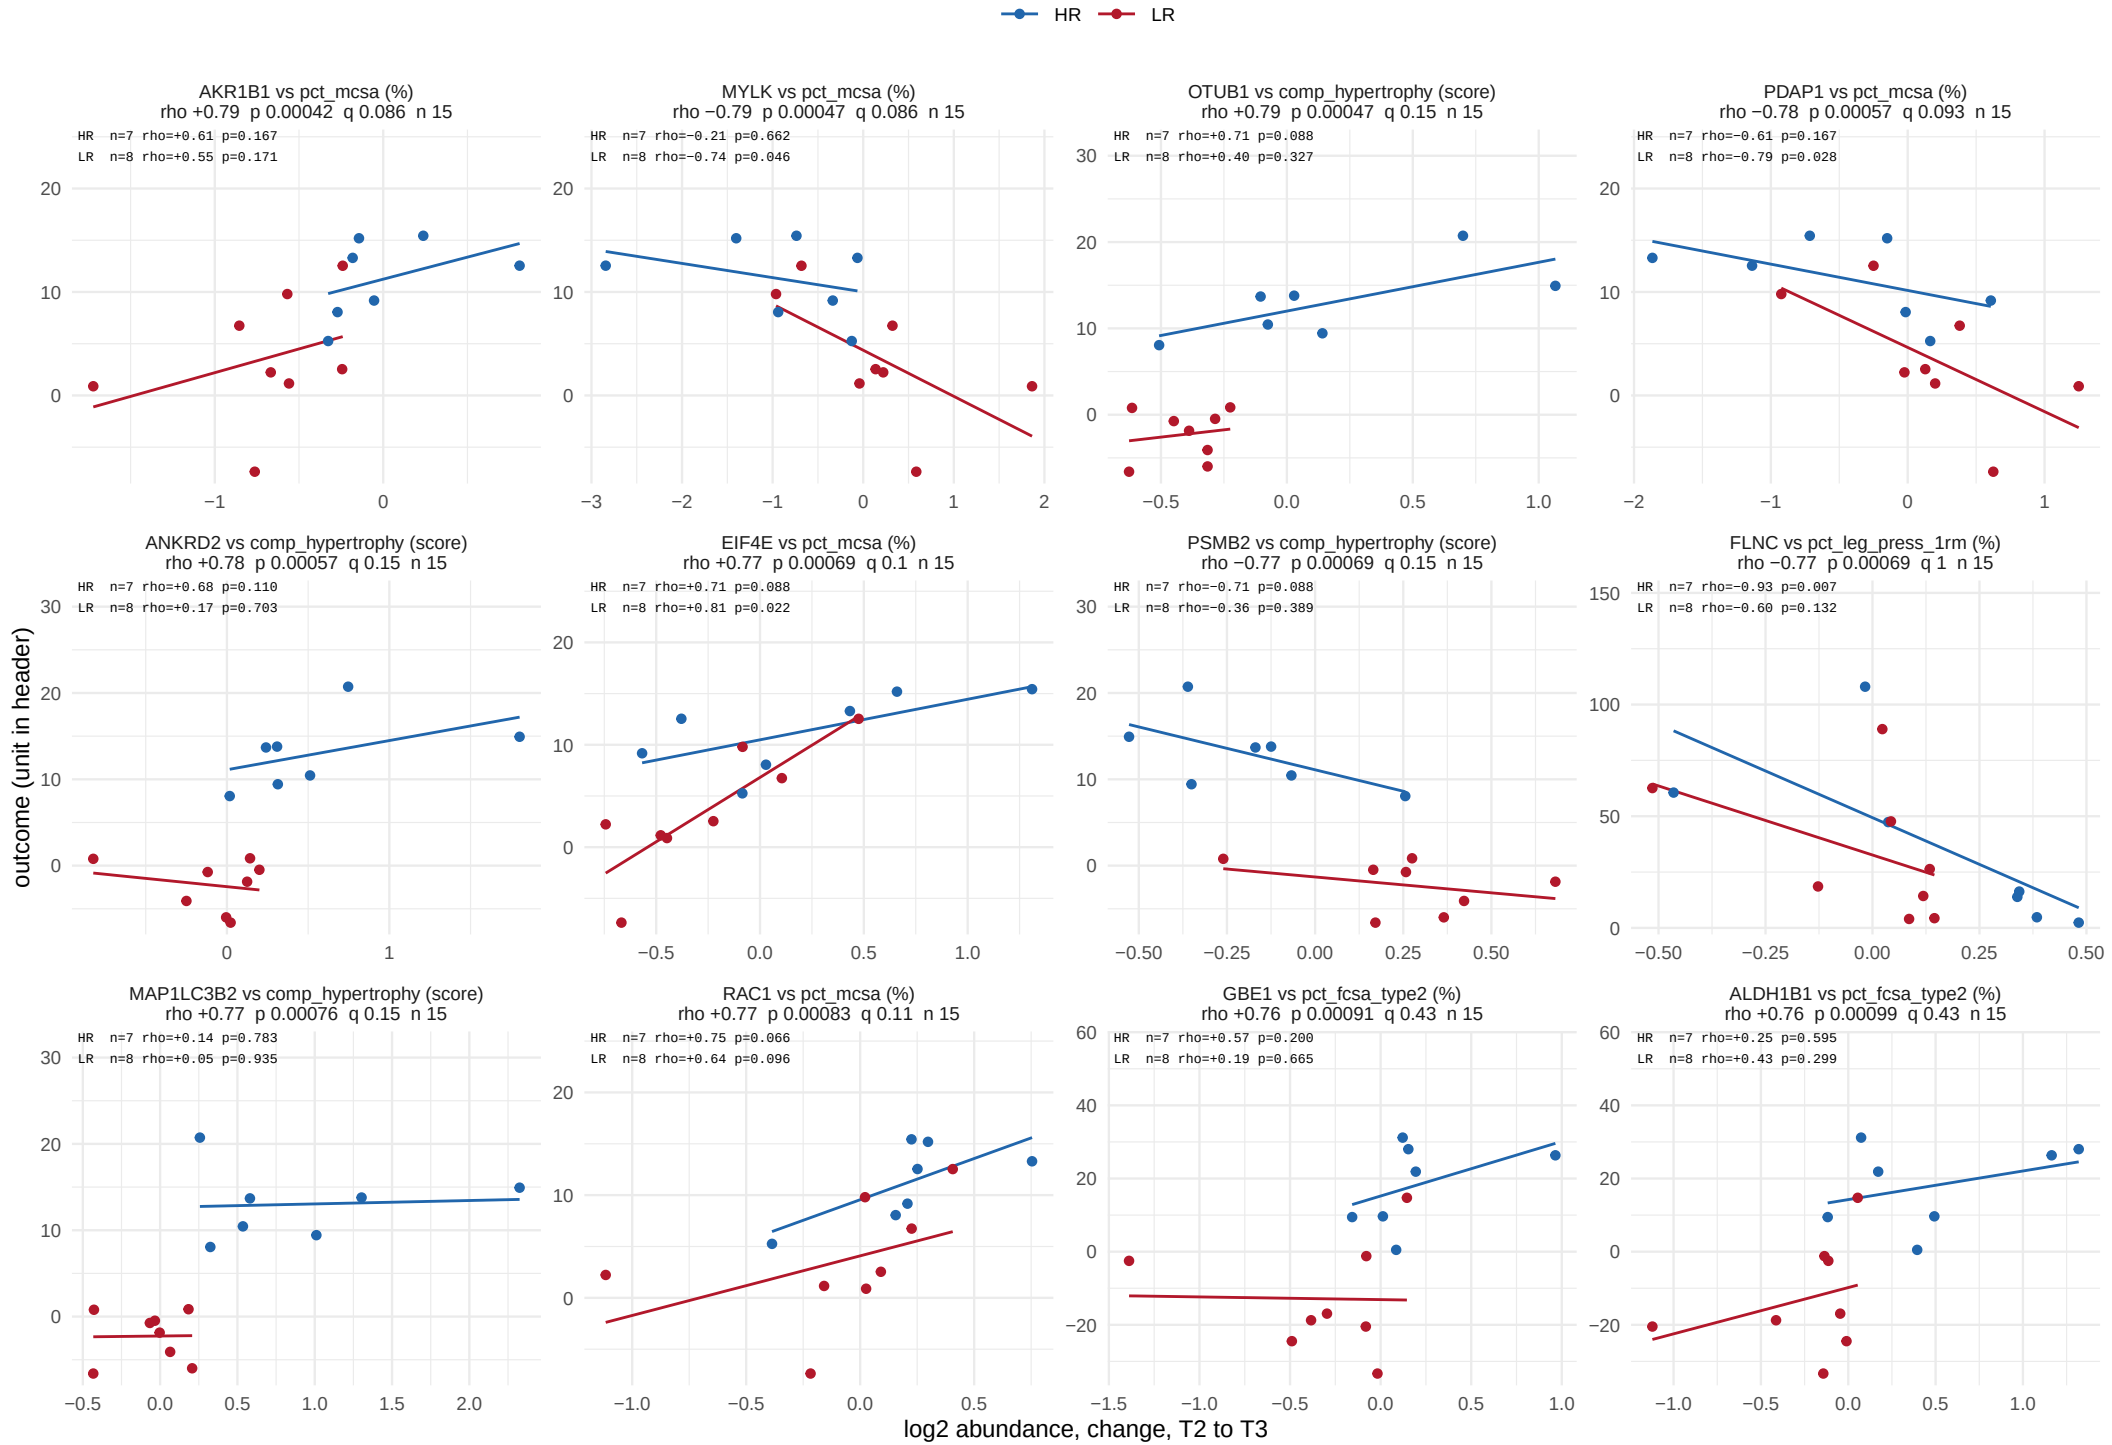

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


741 of 11747 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 3 of 62.

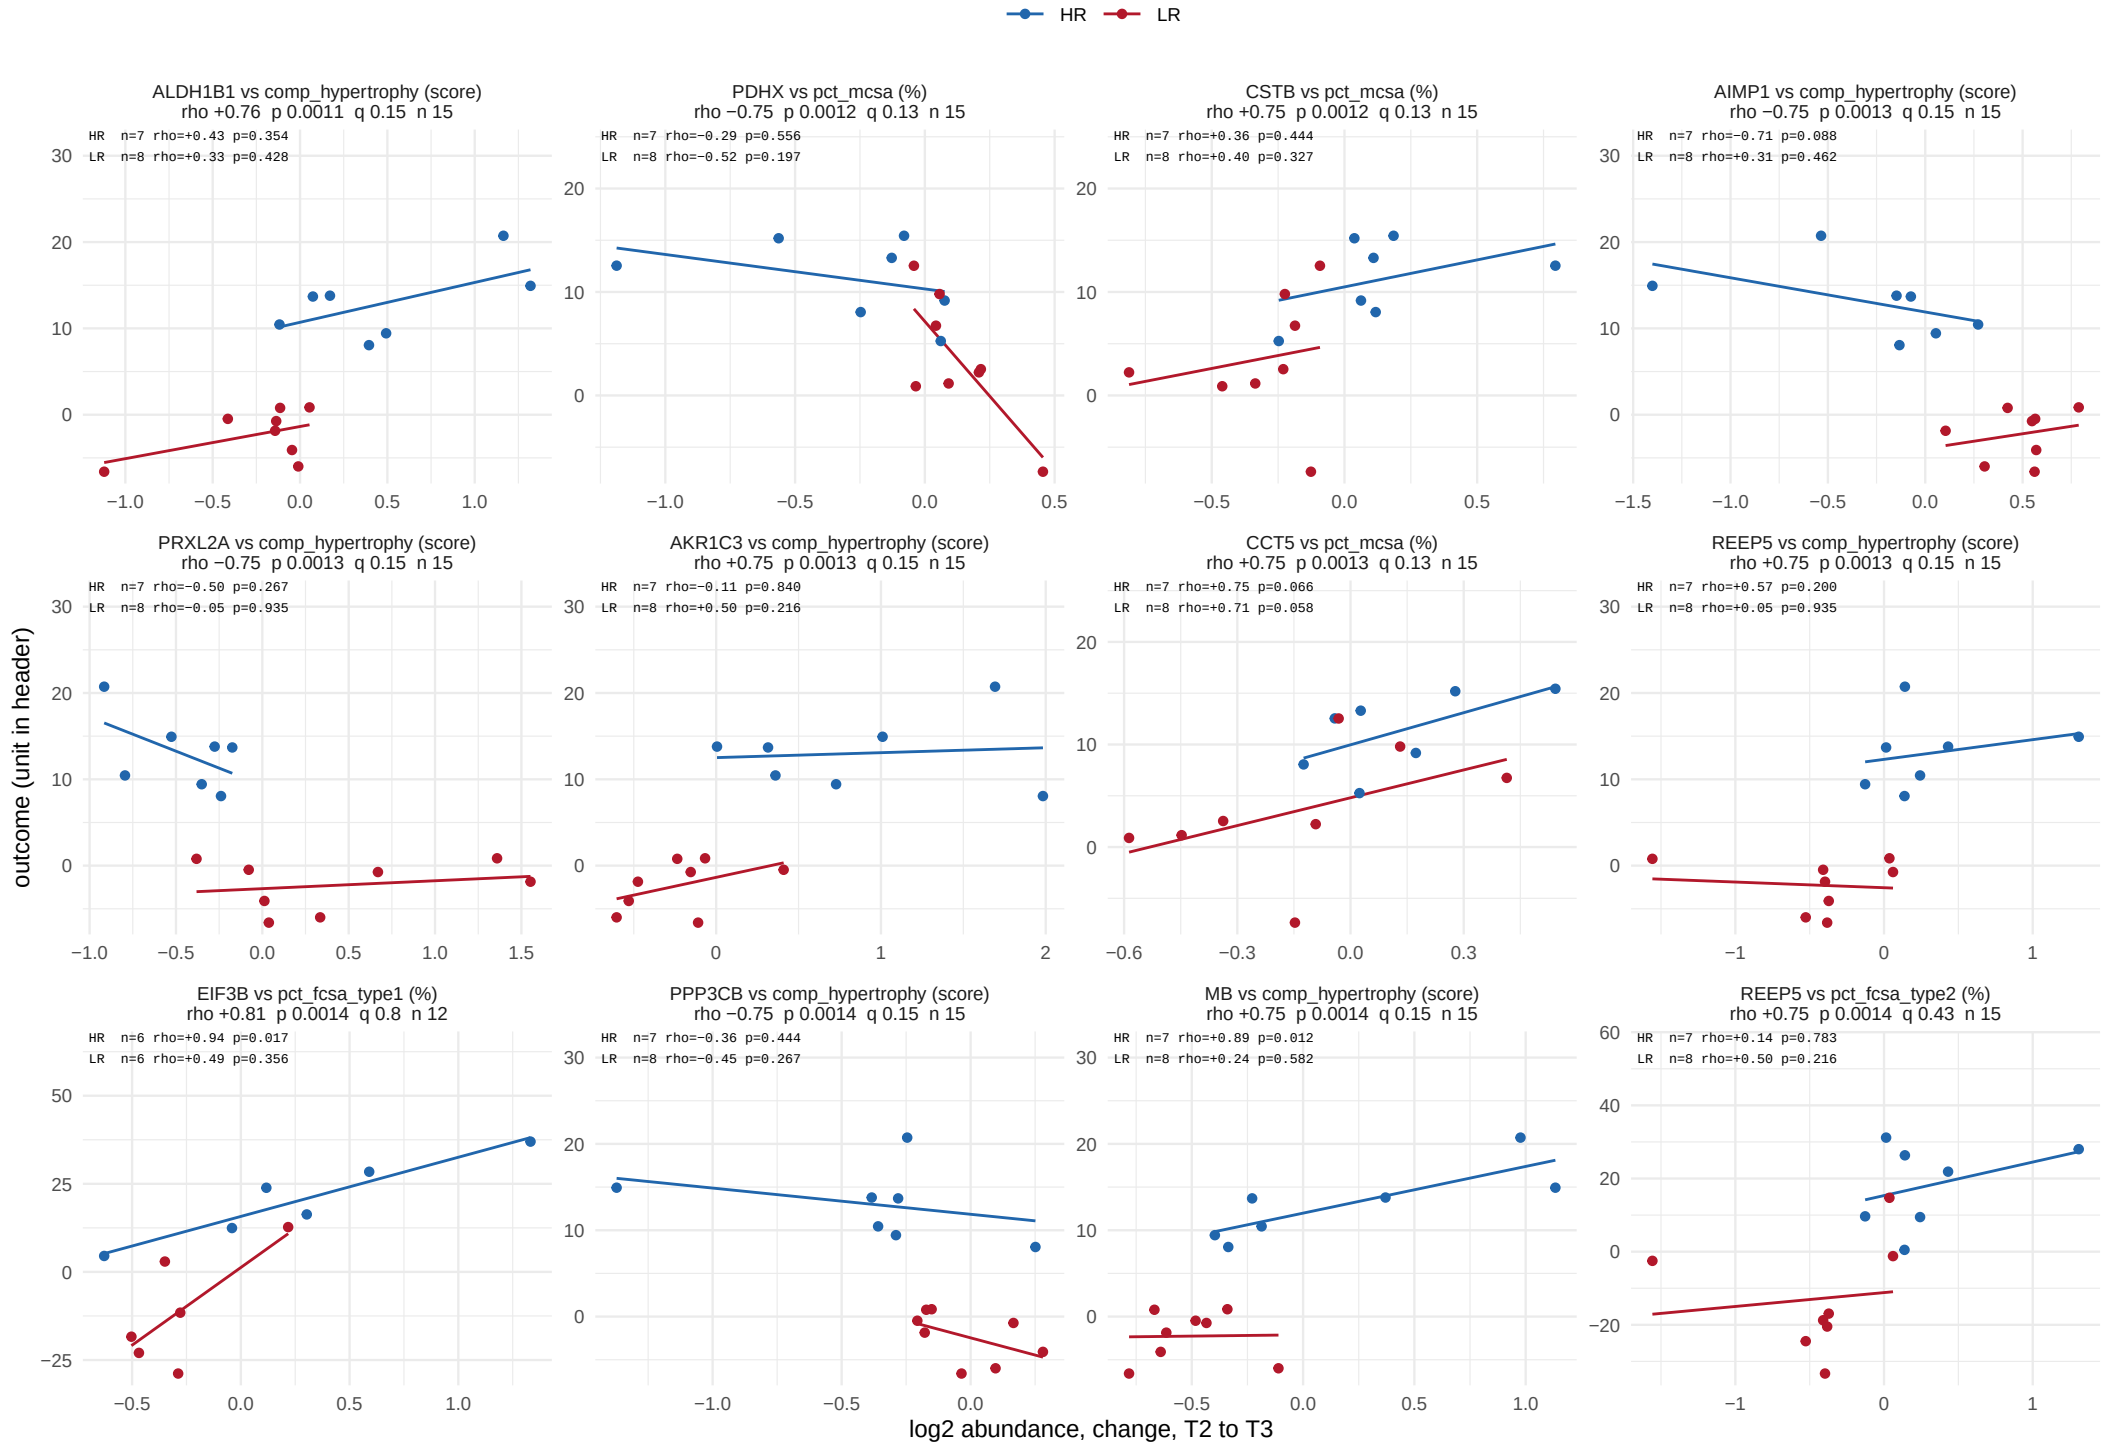

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


741 of 11747 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 4 of 62.

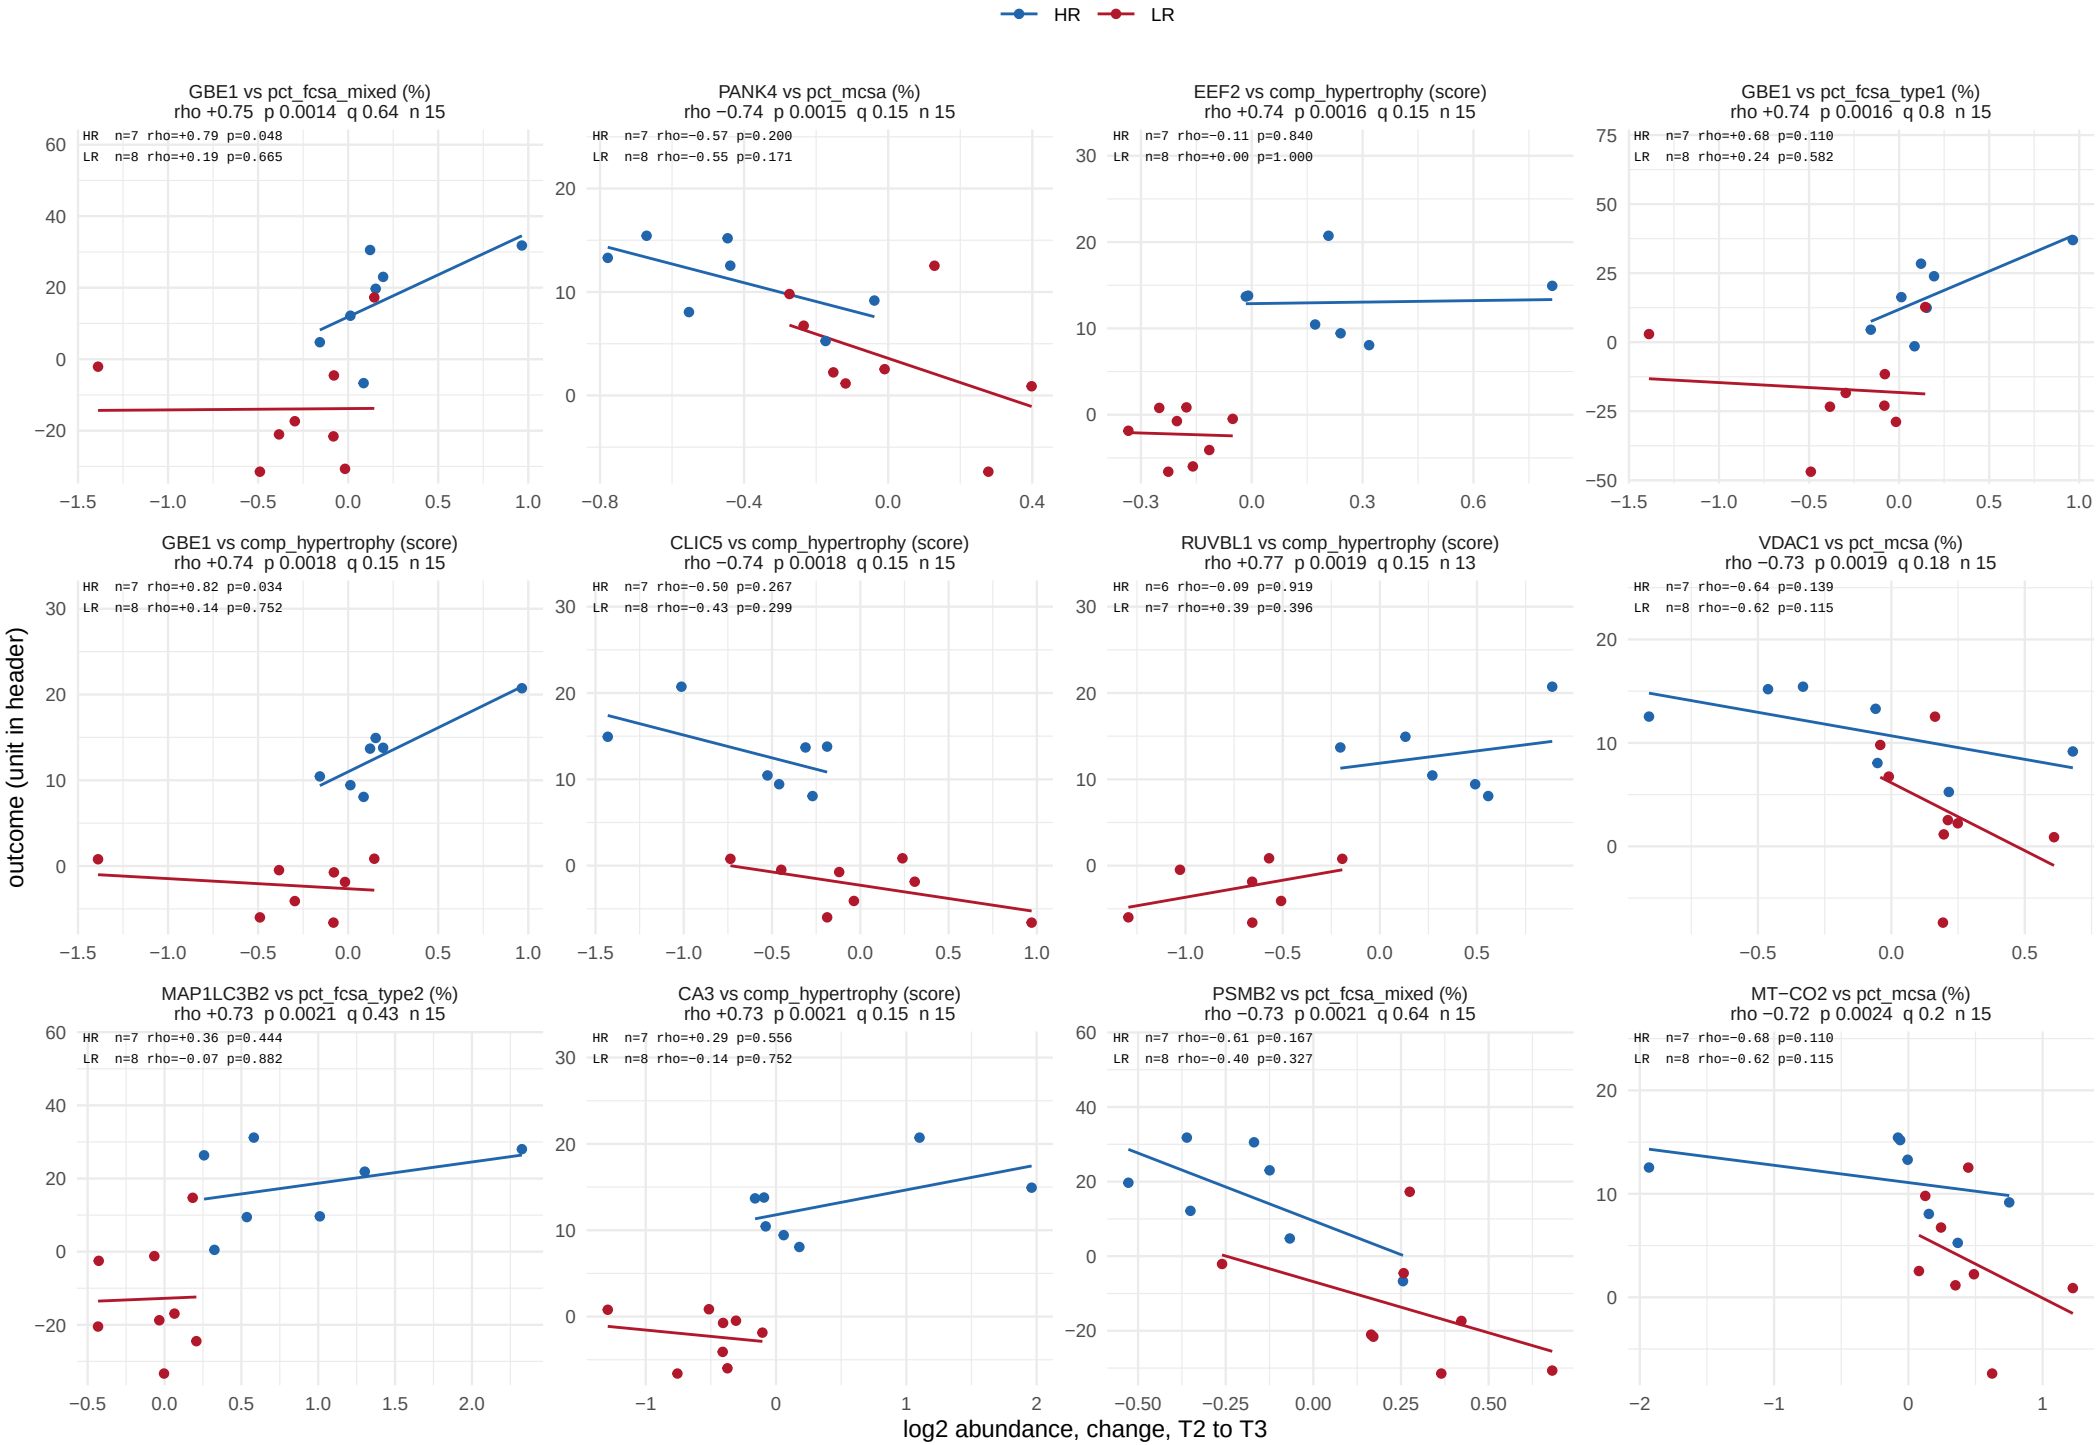

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


741 of 11747 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 5 of 62.

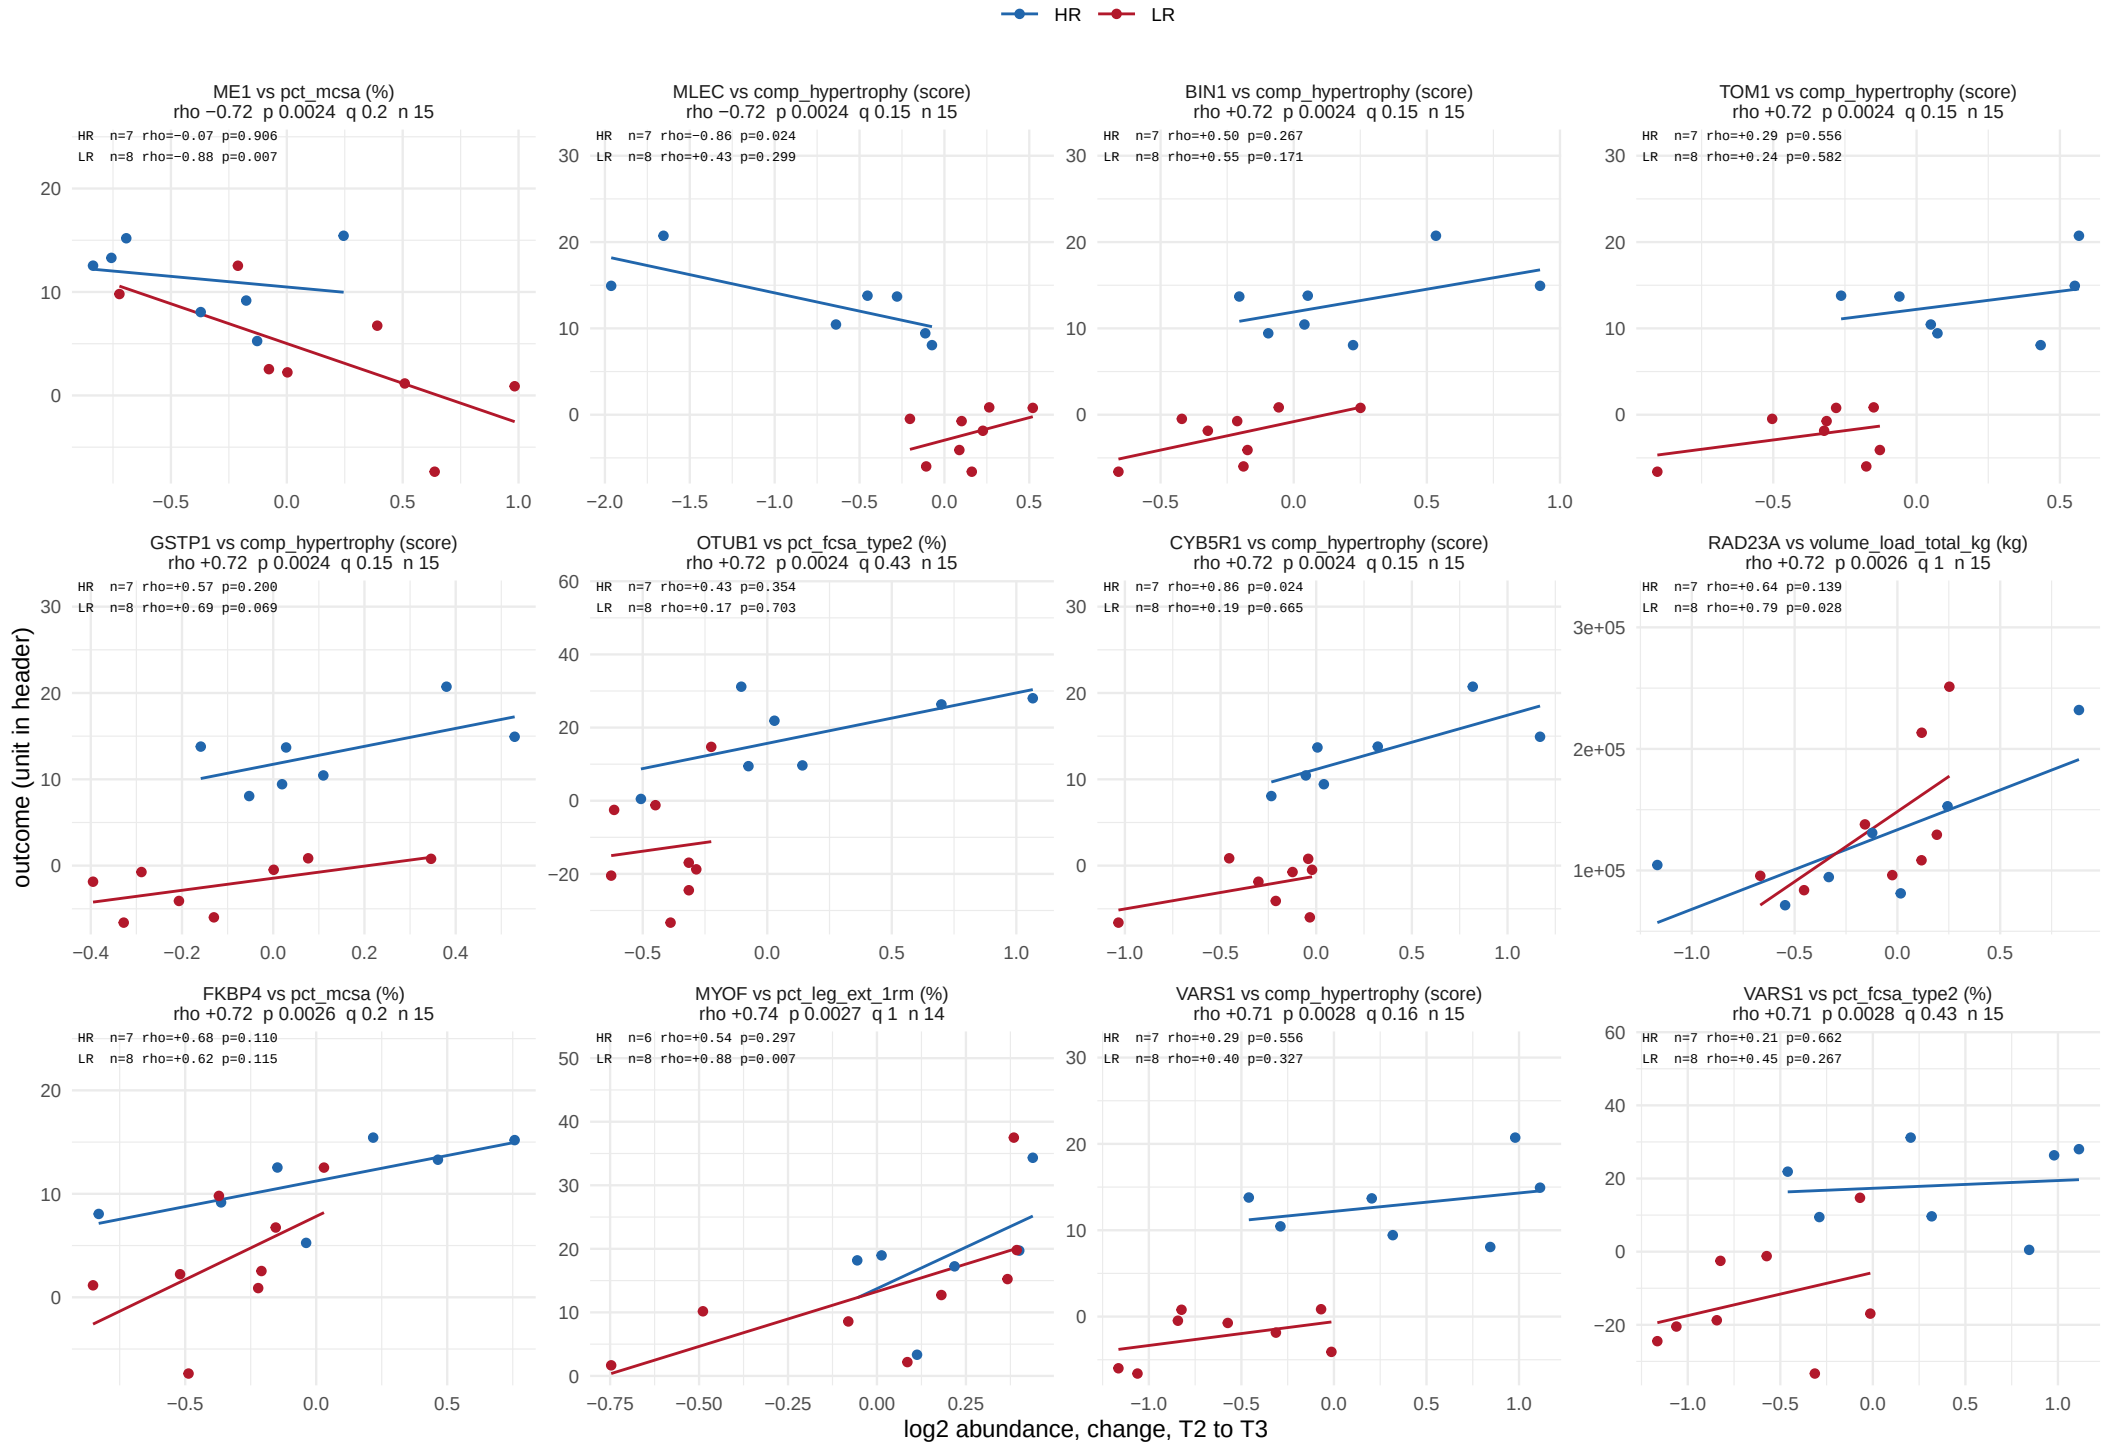

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


741 of 11747 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 6 of 62.

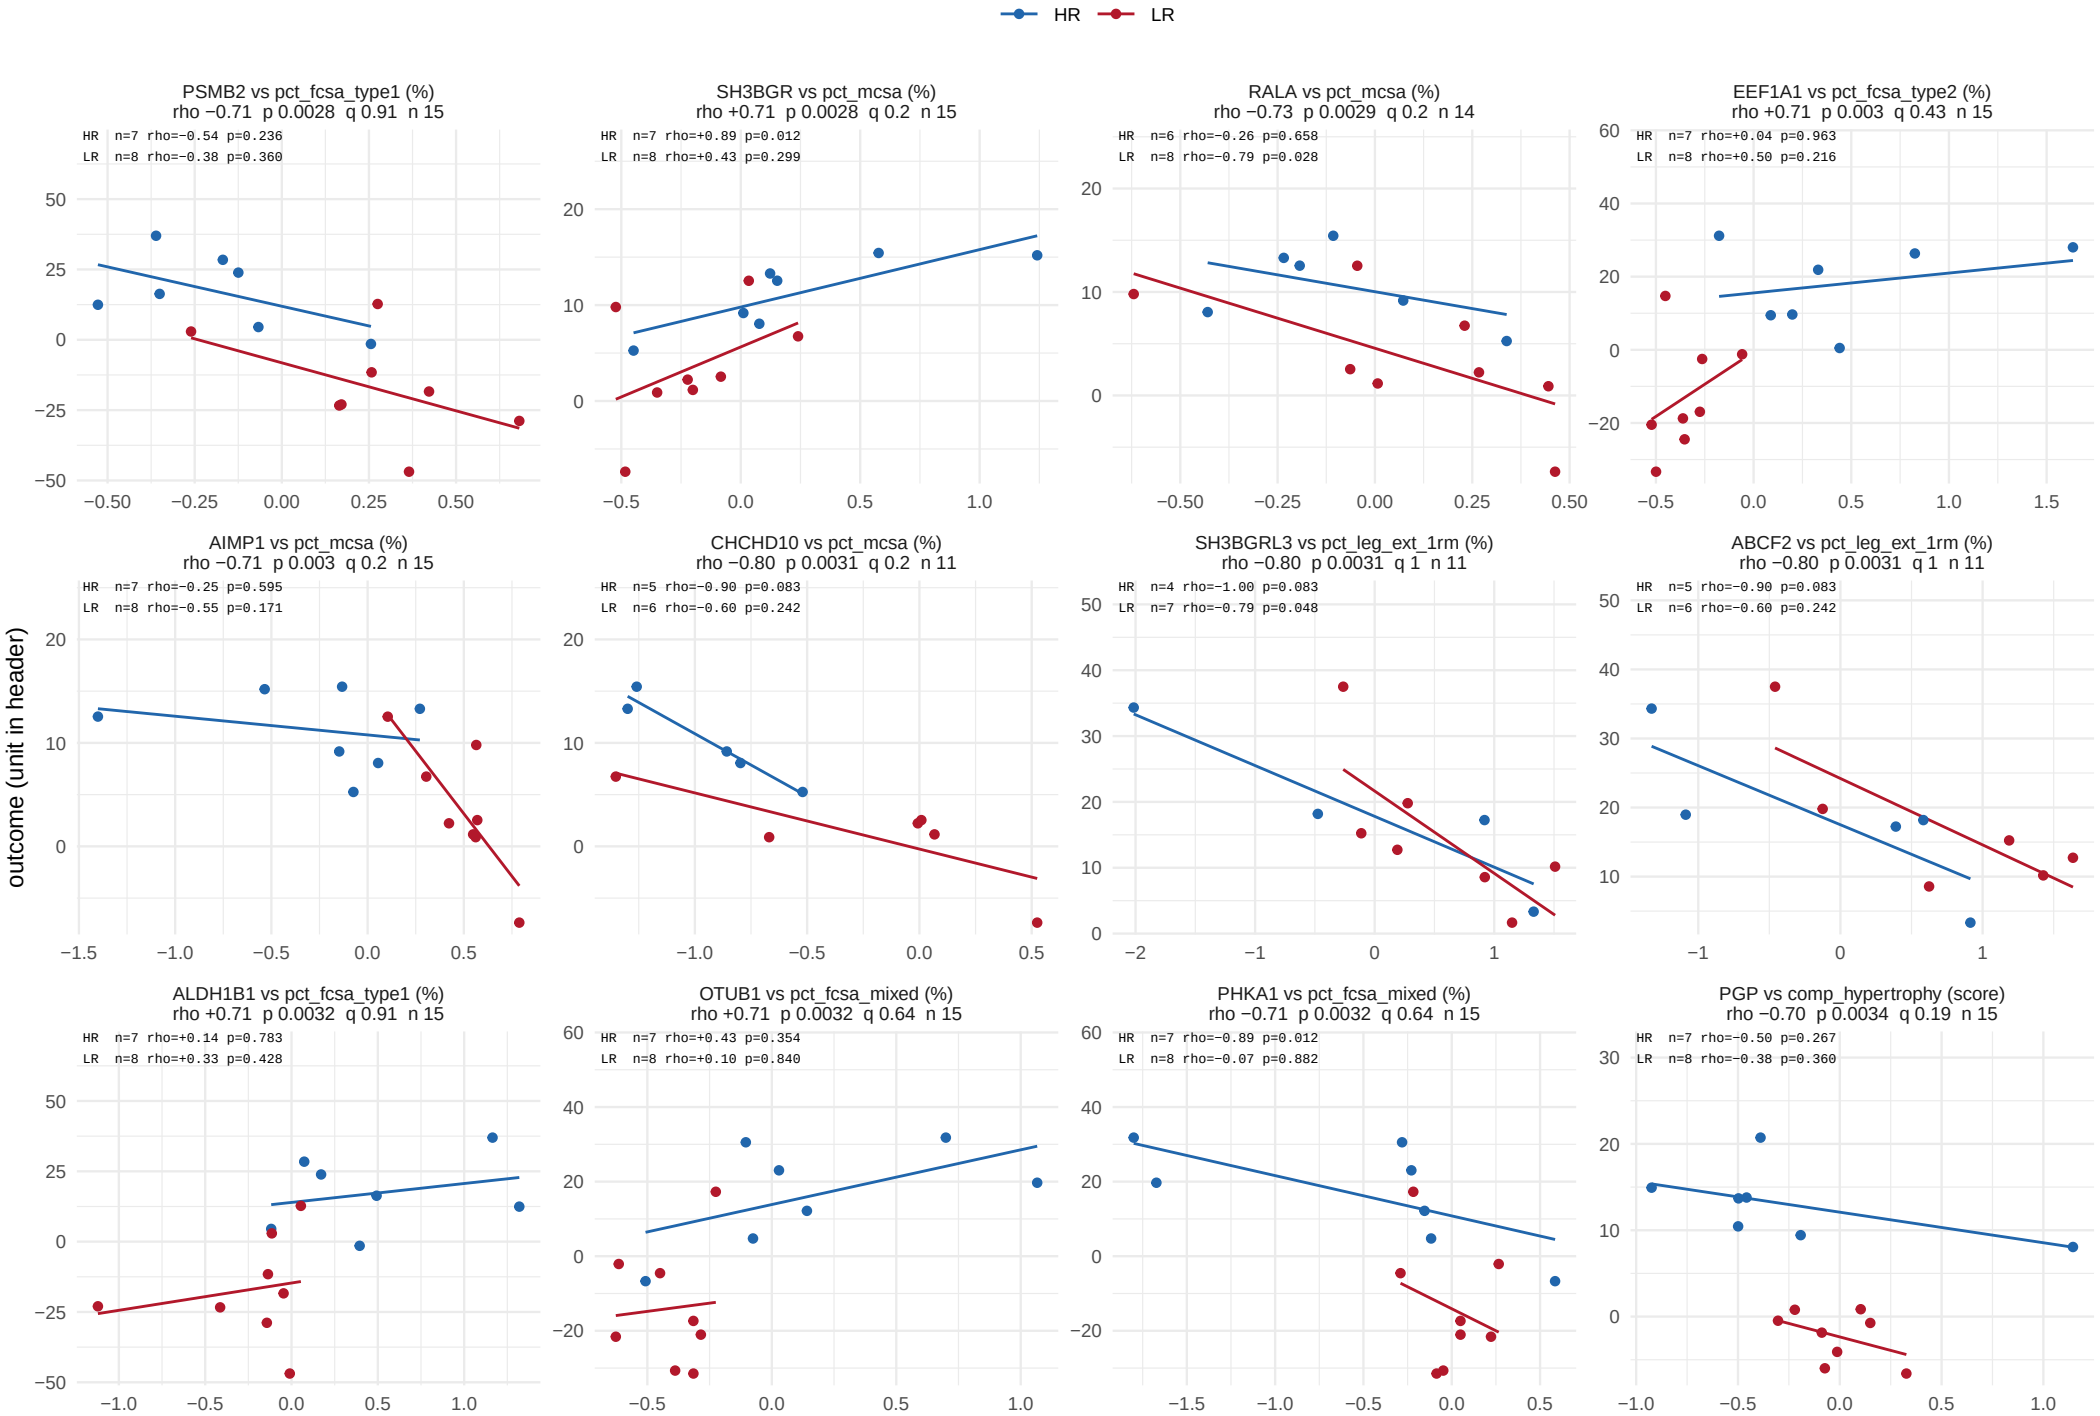

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


741 of 11747 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 7 of 62.

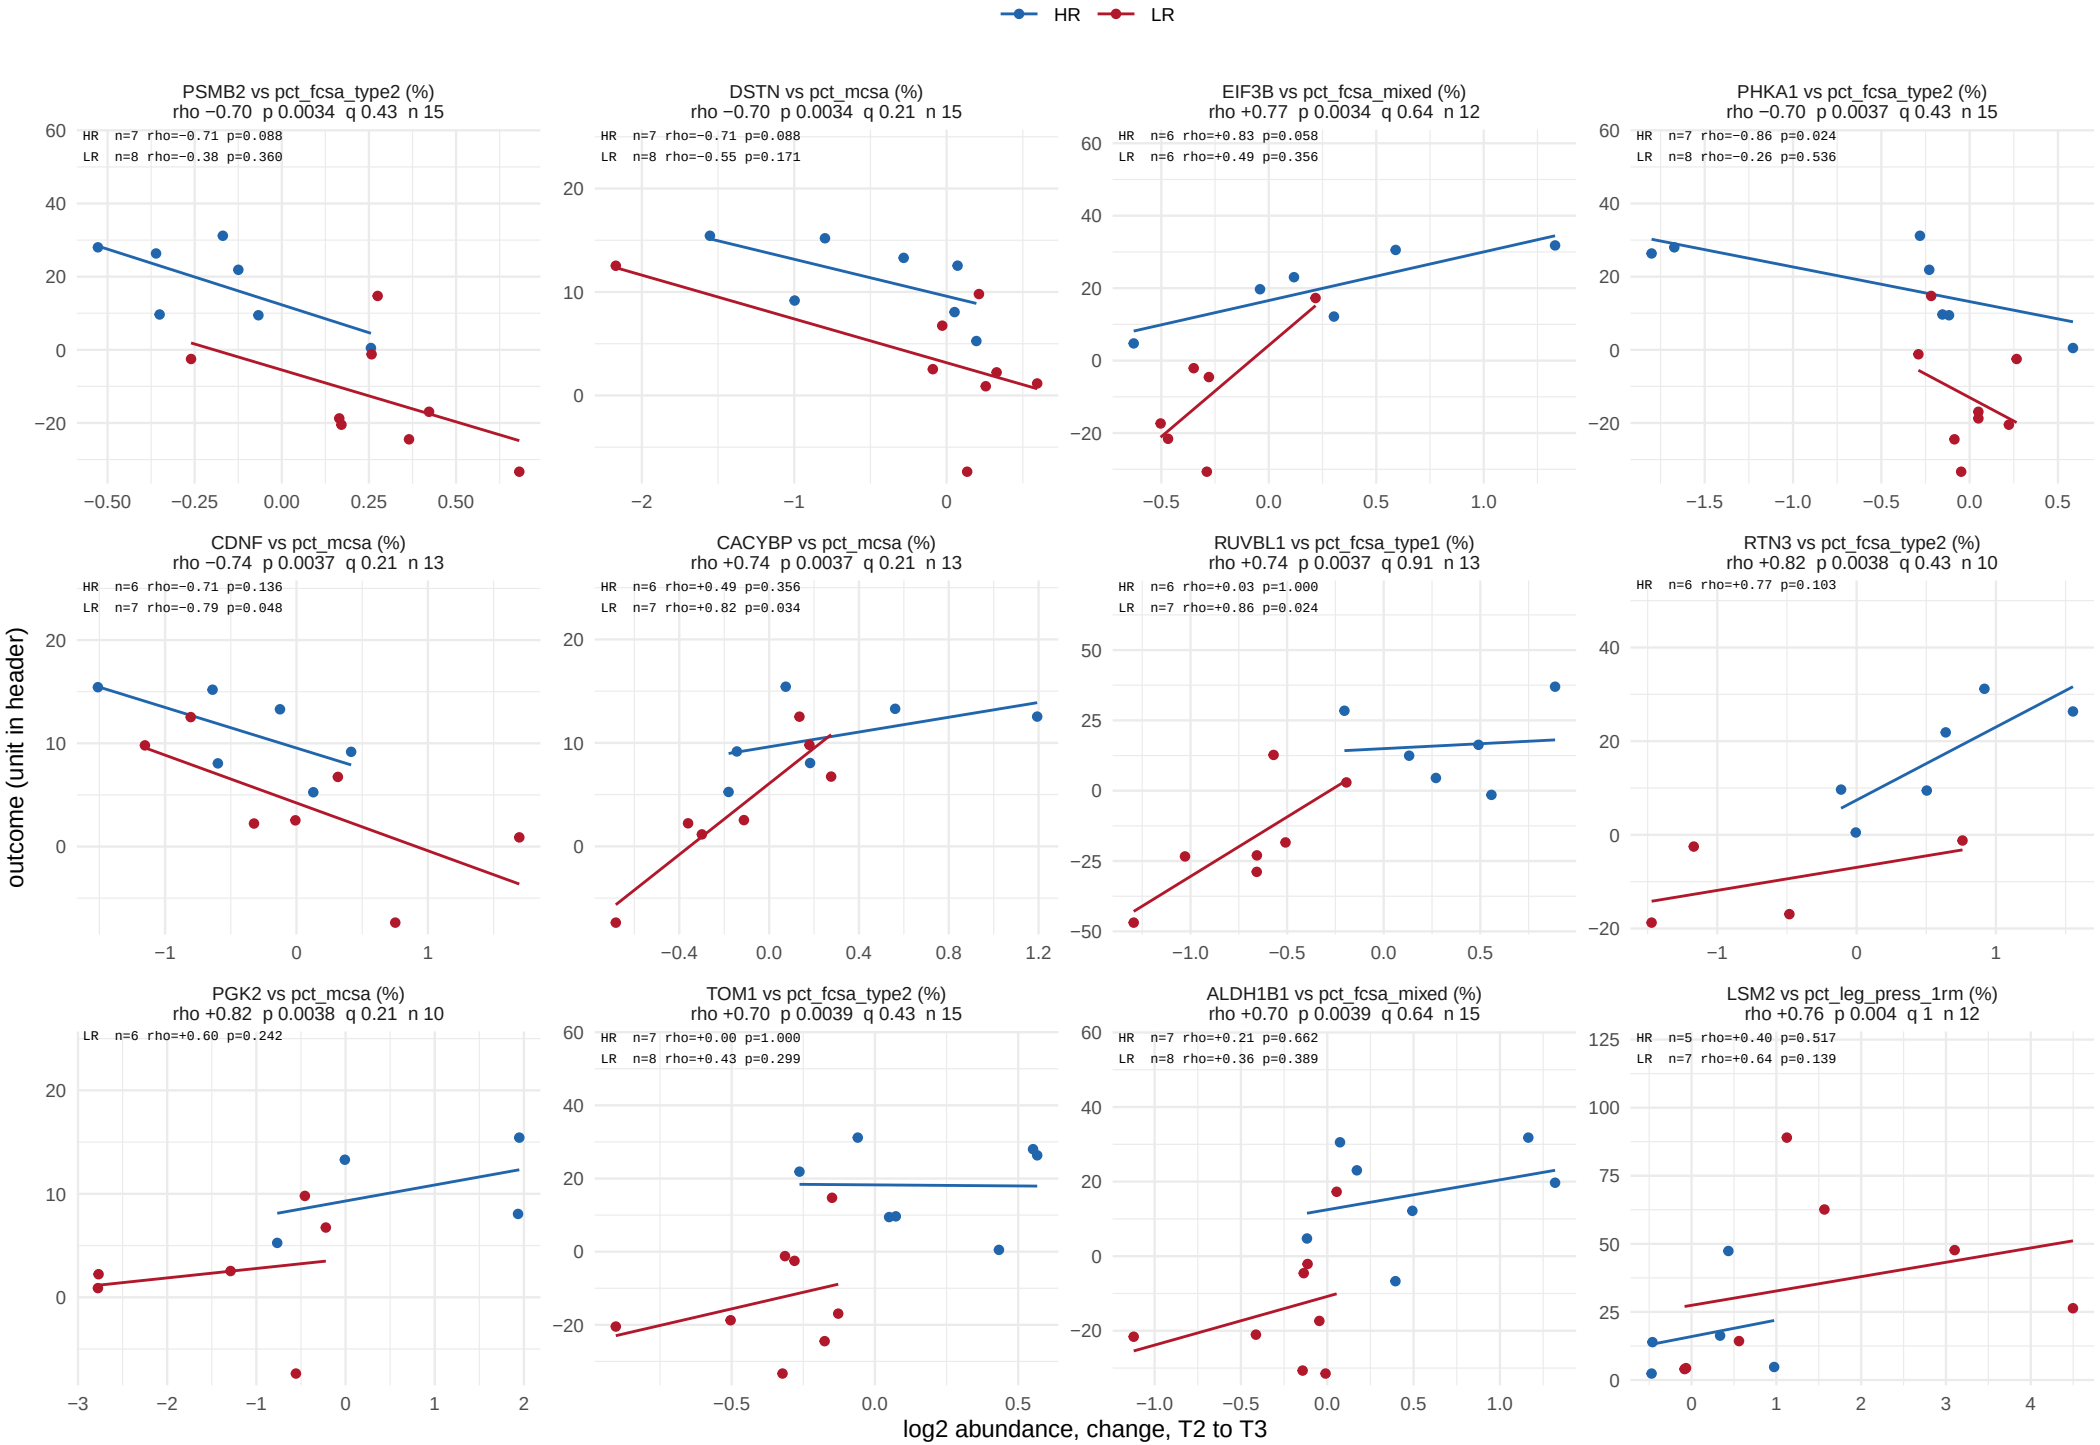

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


741 of 11747 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 8 of 62.

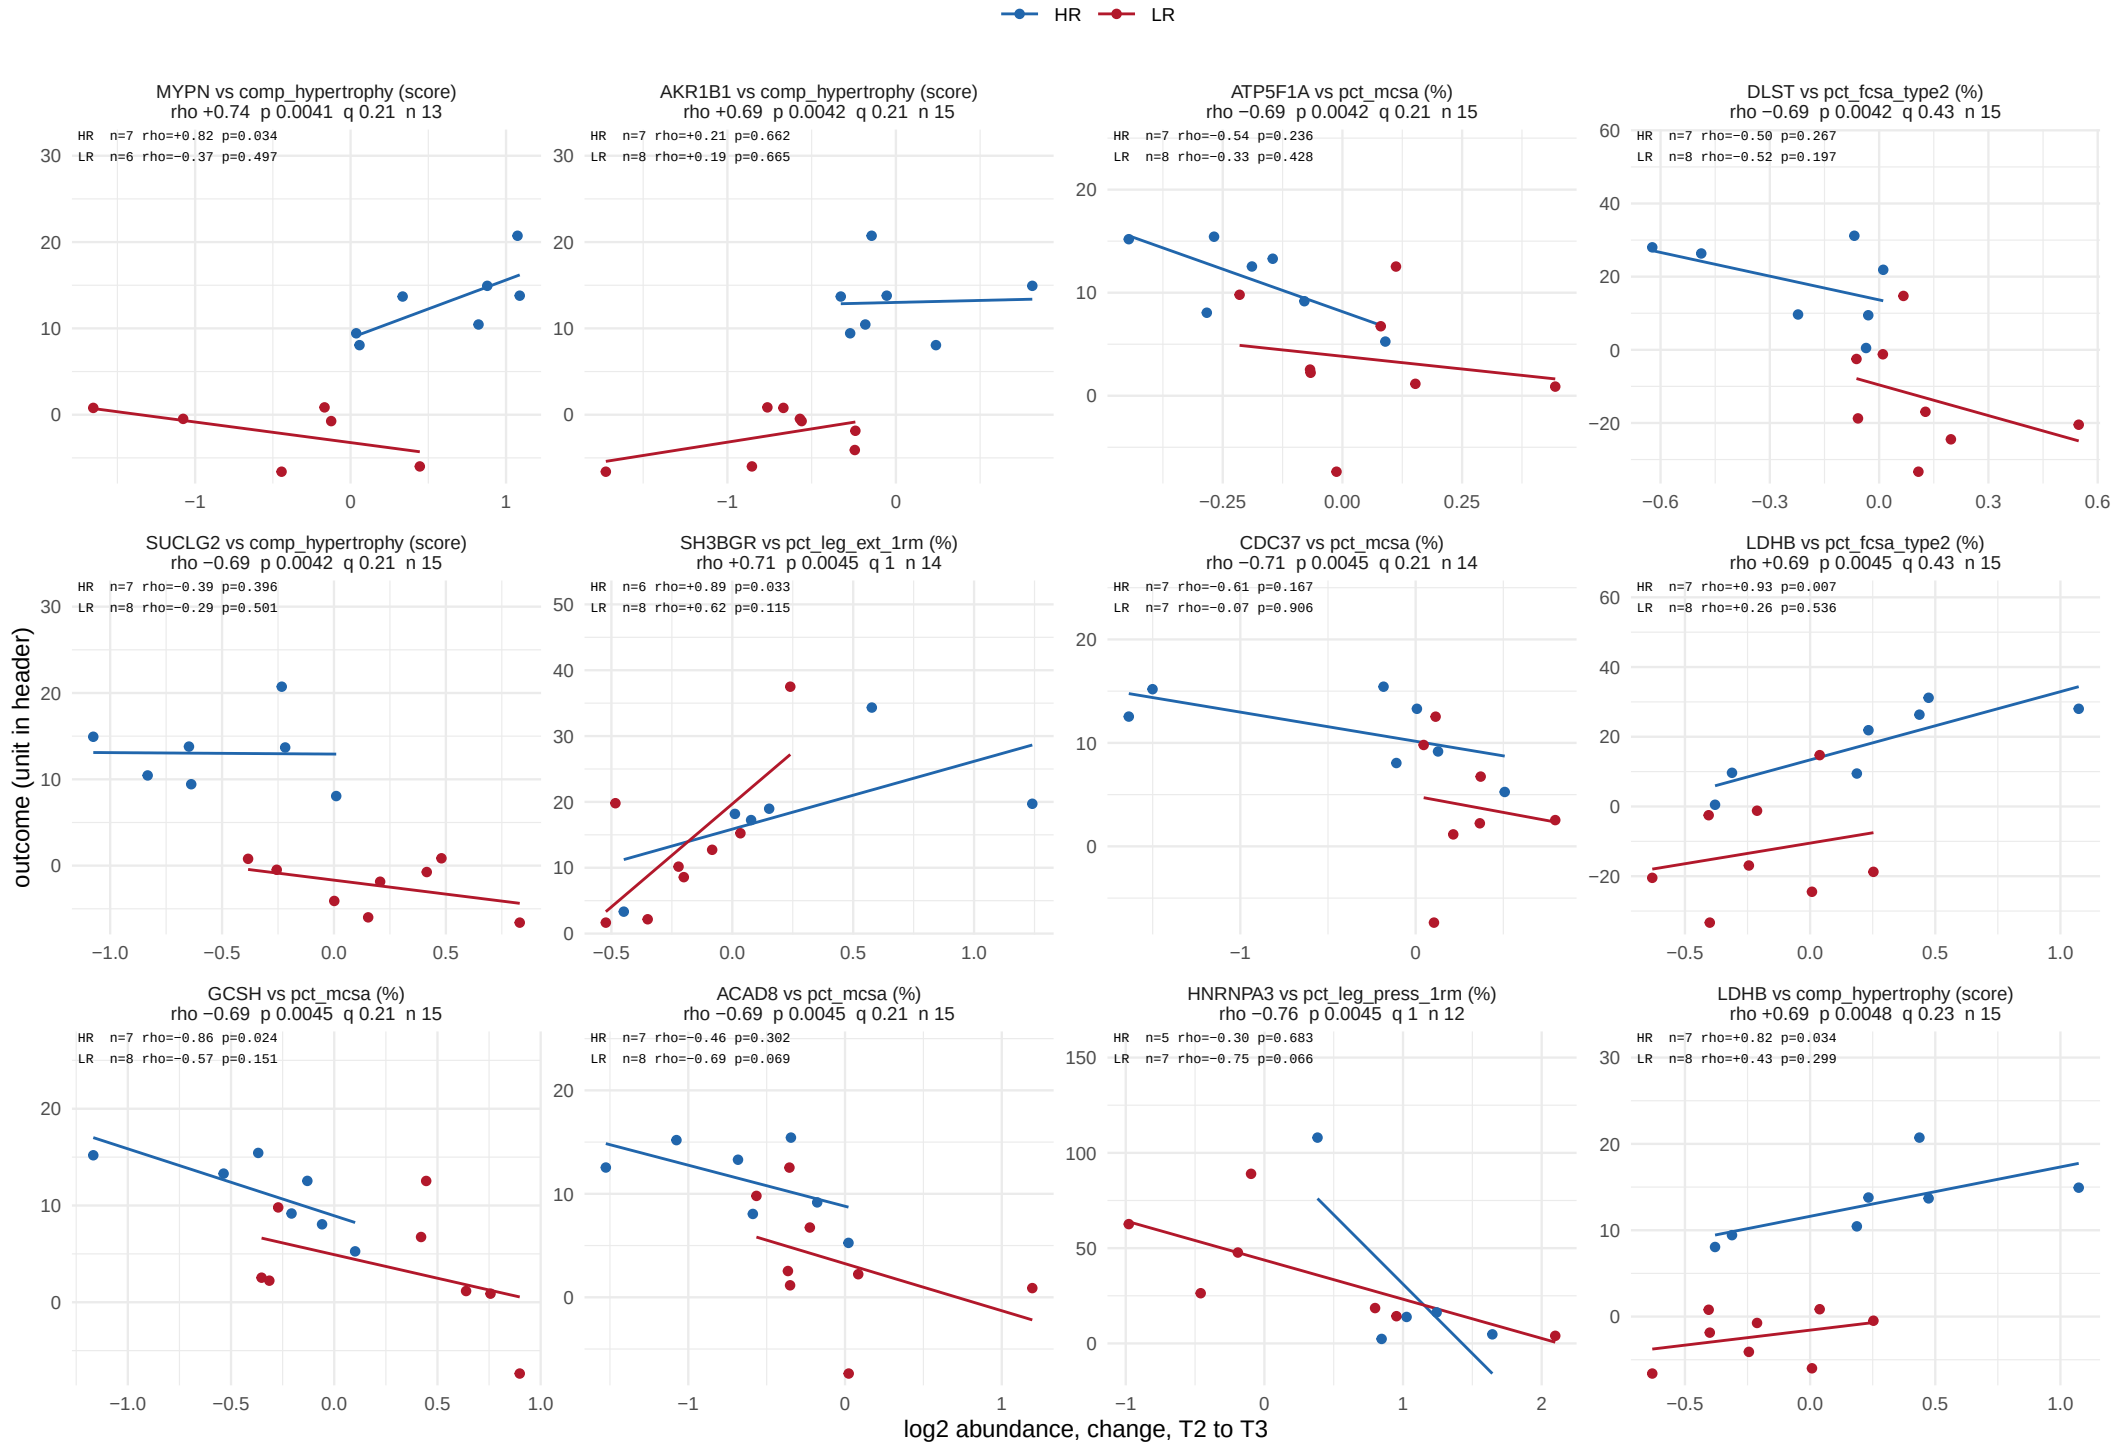

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


741 of 11747 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 9 of 62.

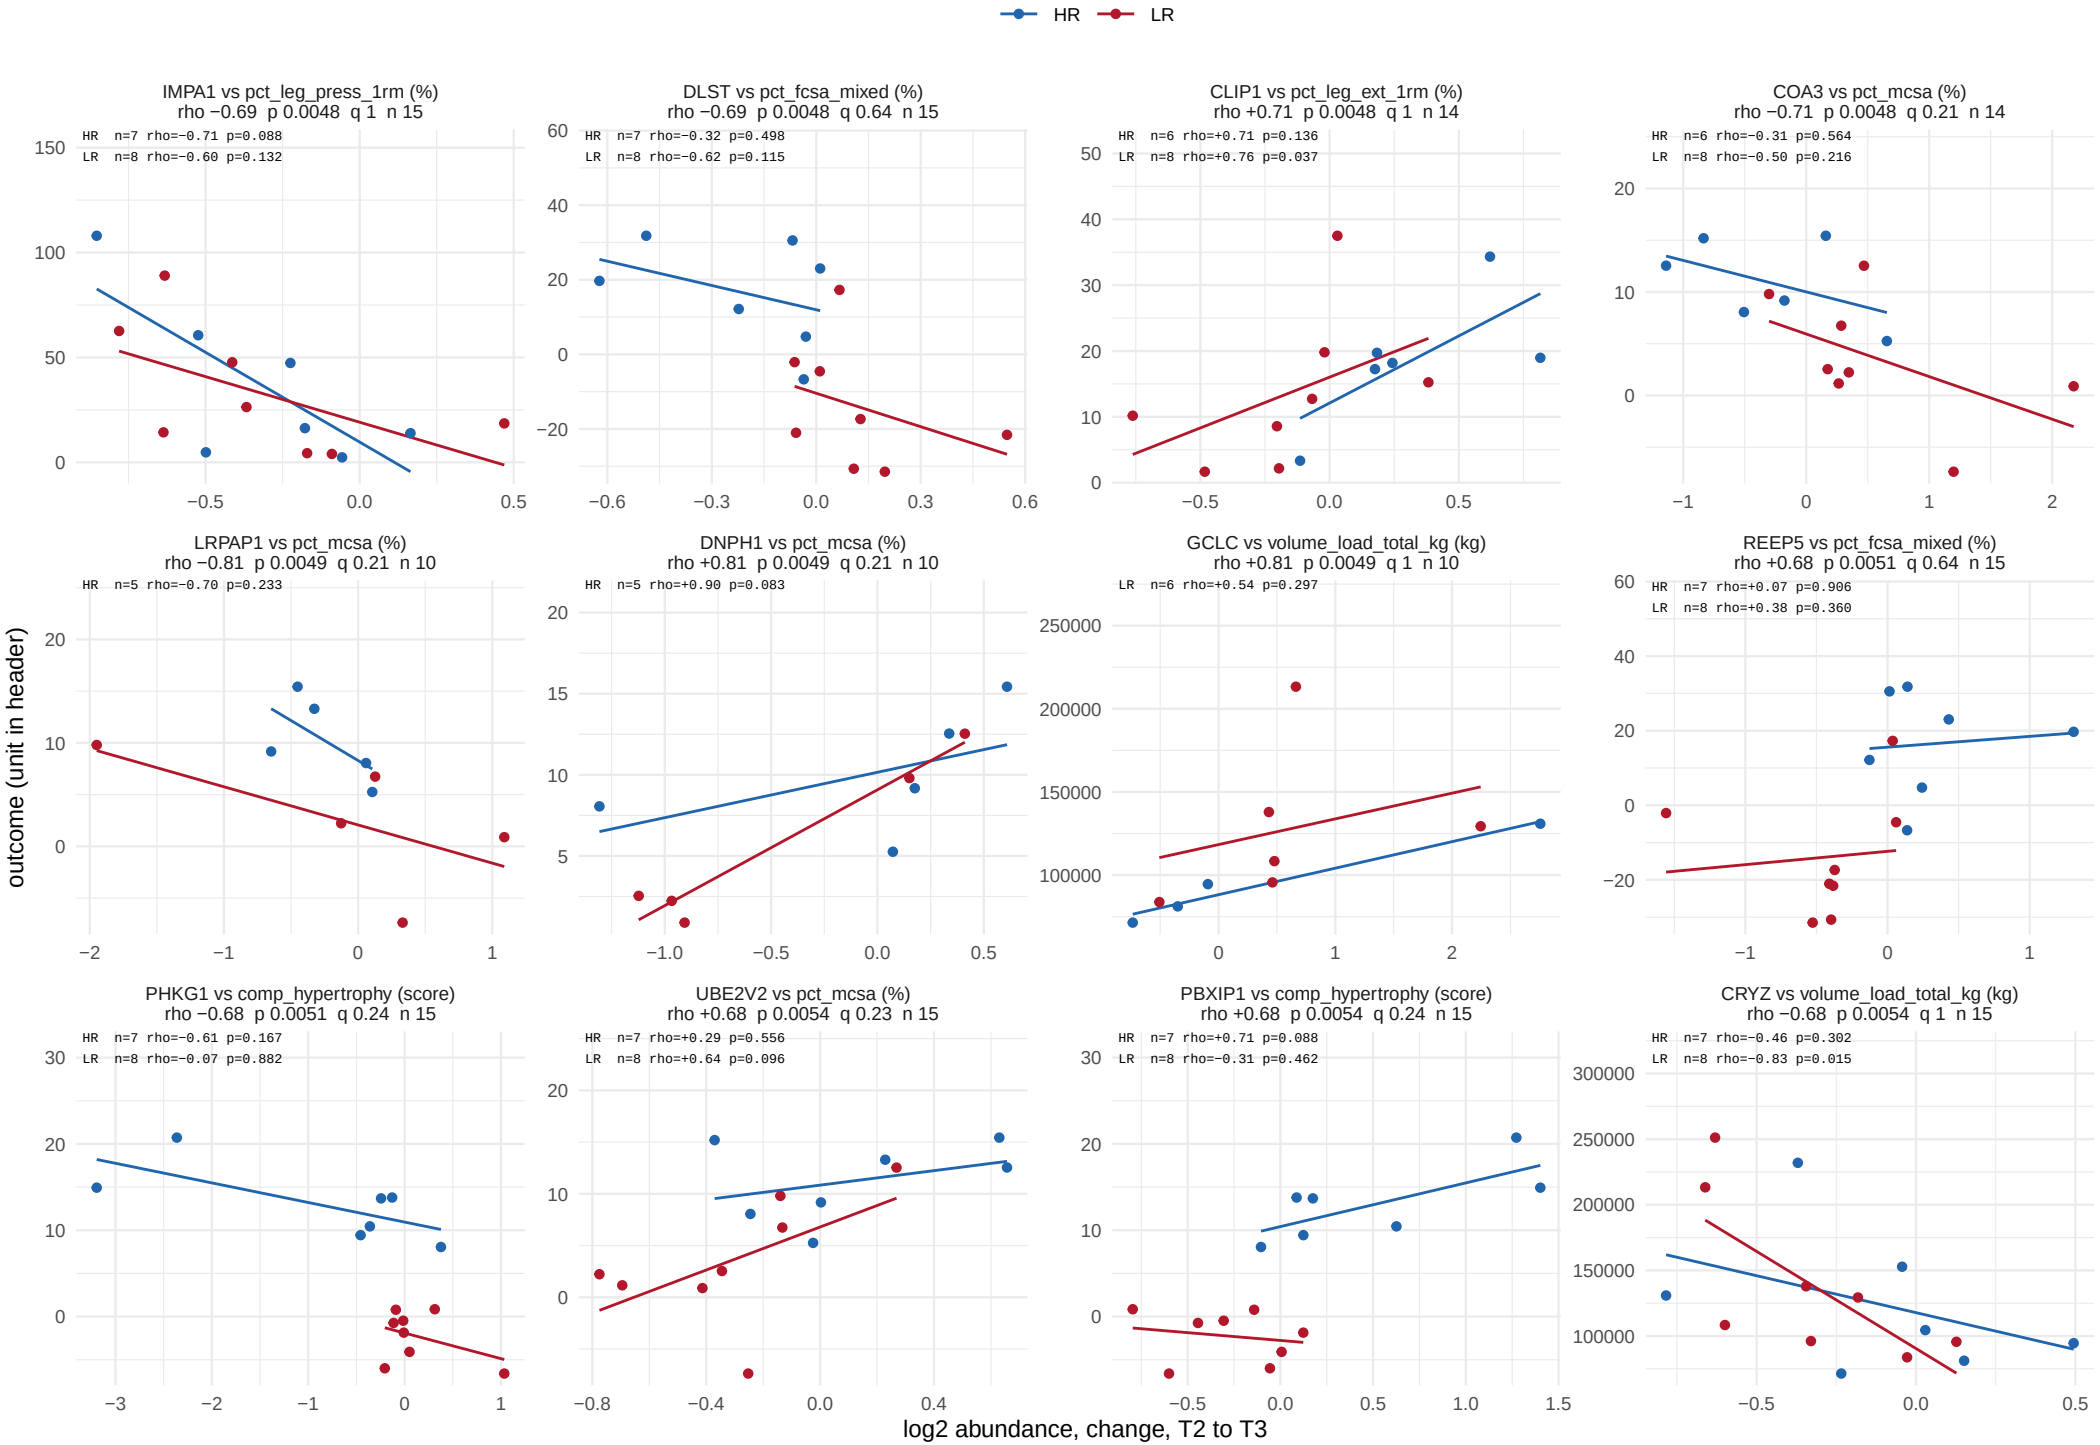

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


741 of 11747 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 10 of 62.

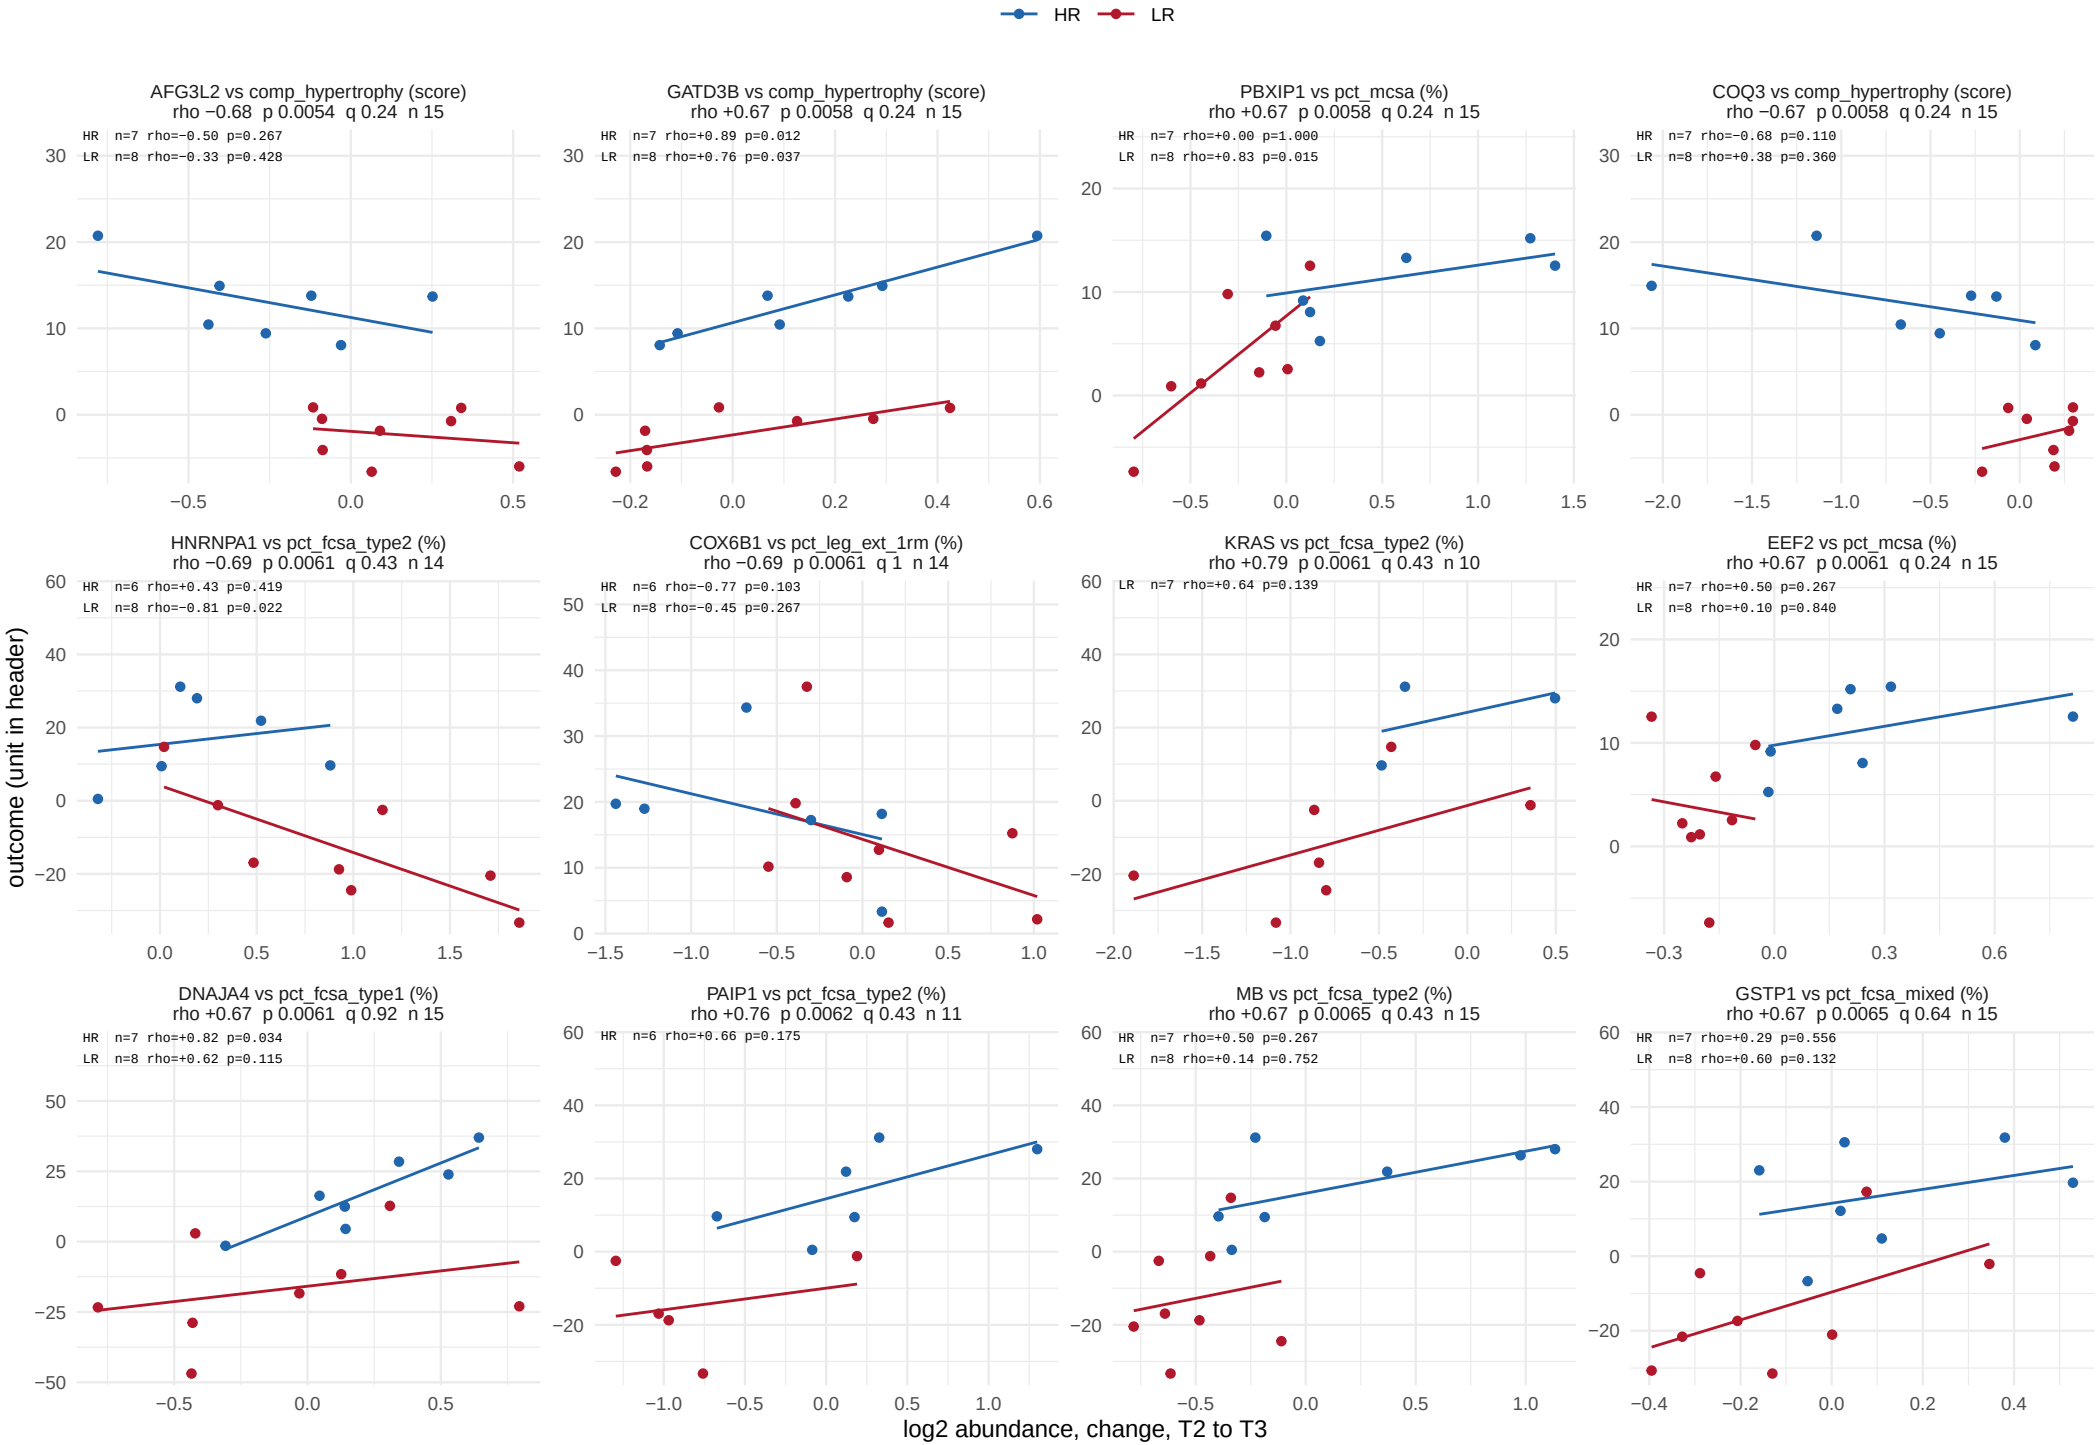

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


741 of 11747 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 11 of 62.

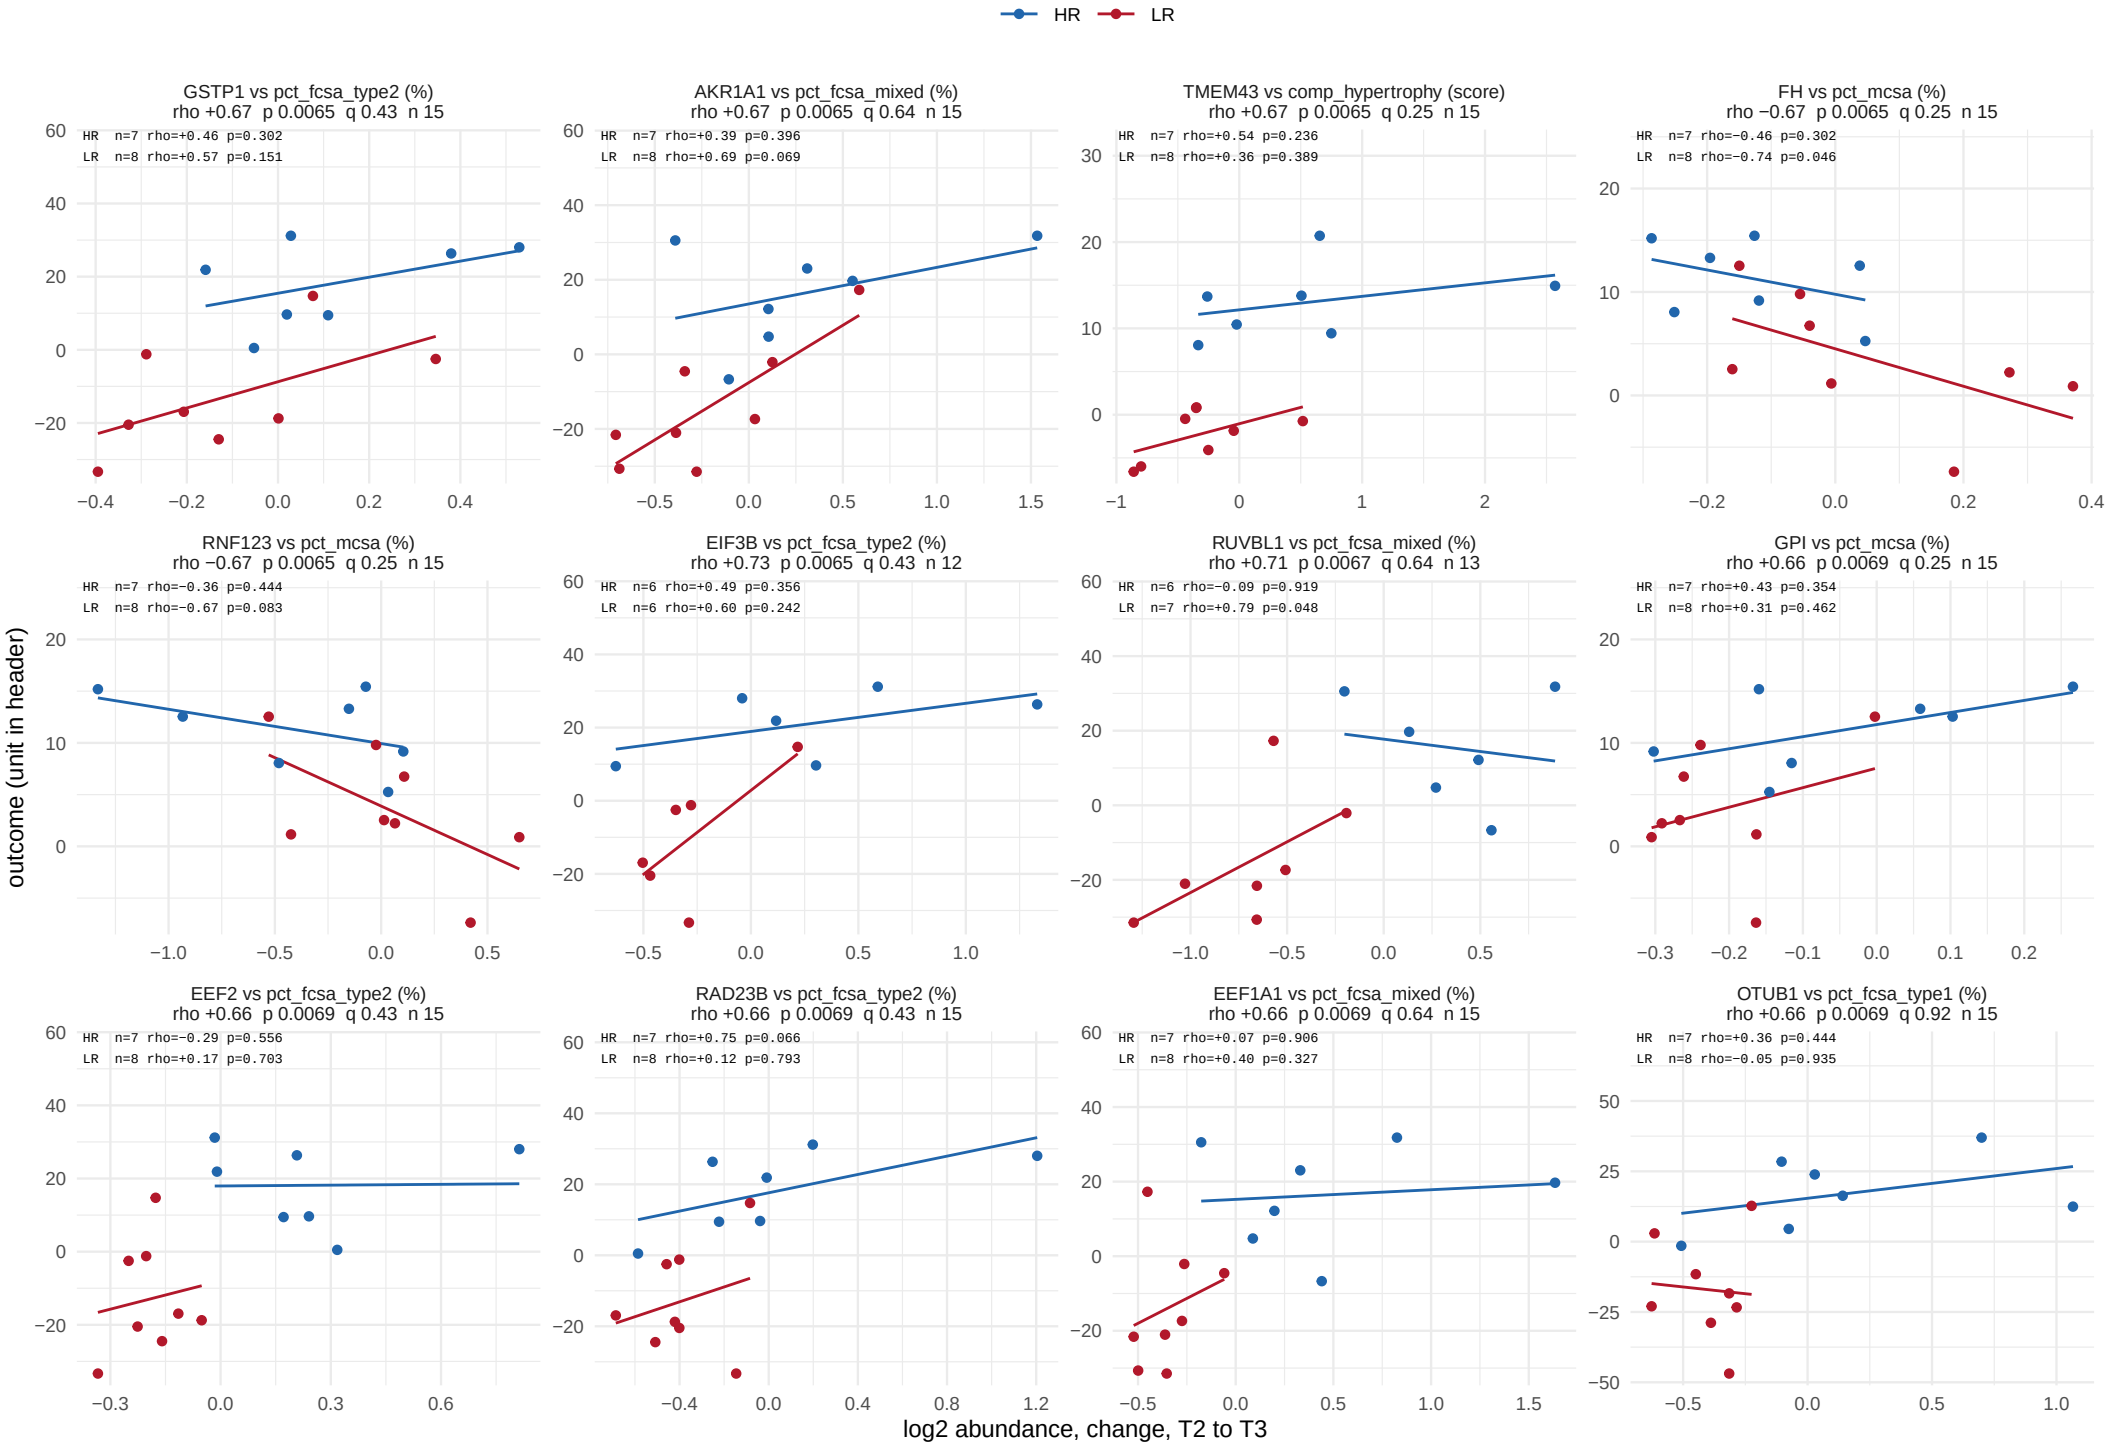

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


741 of 11747 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 12 of 62.

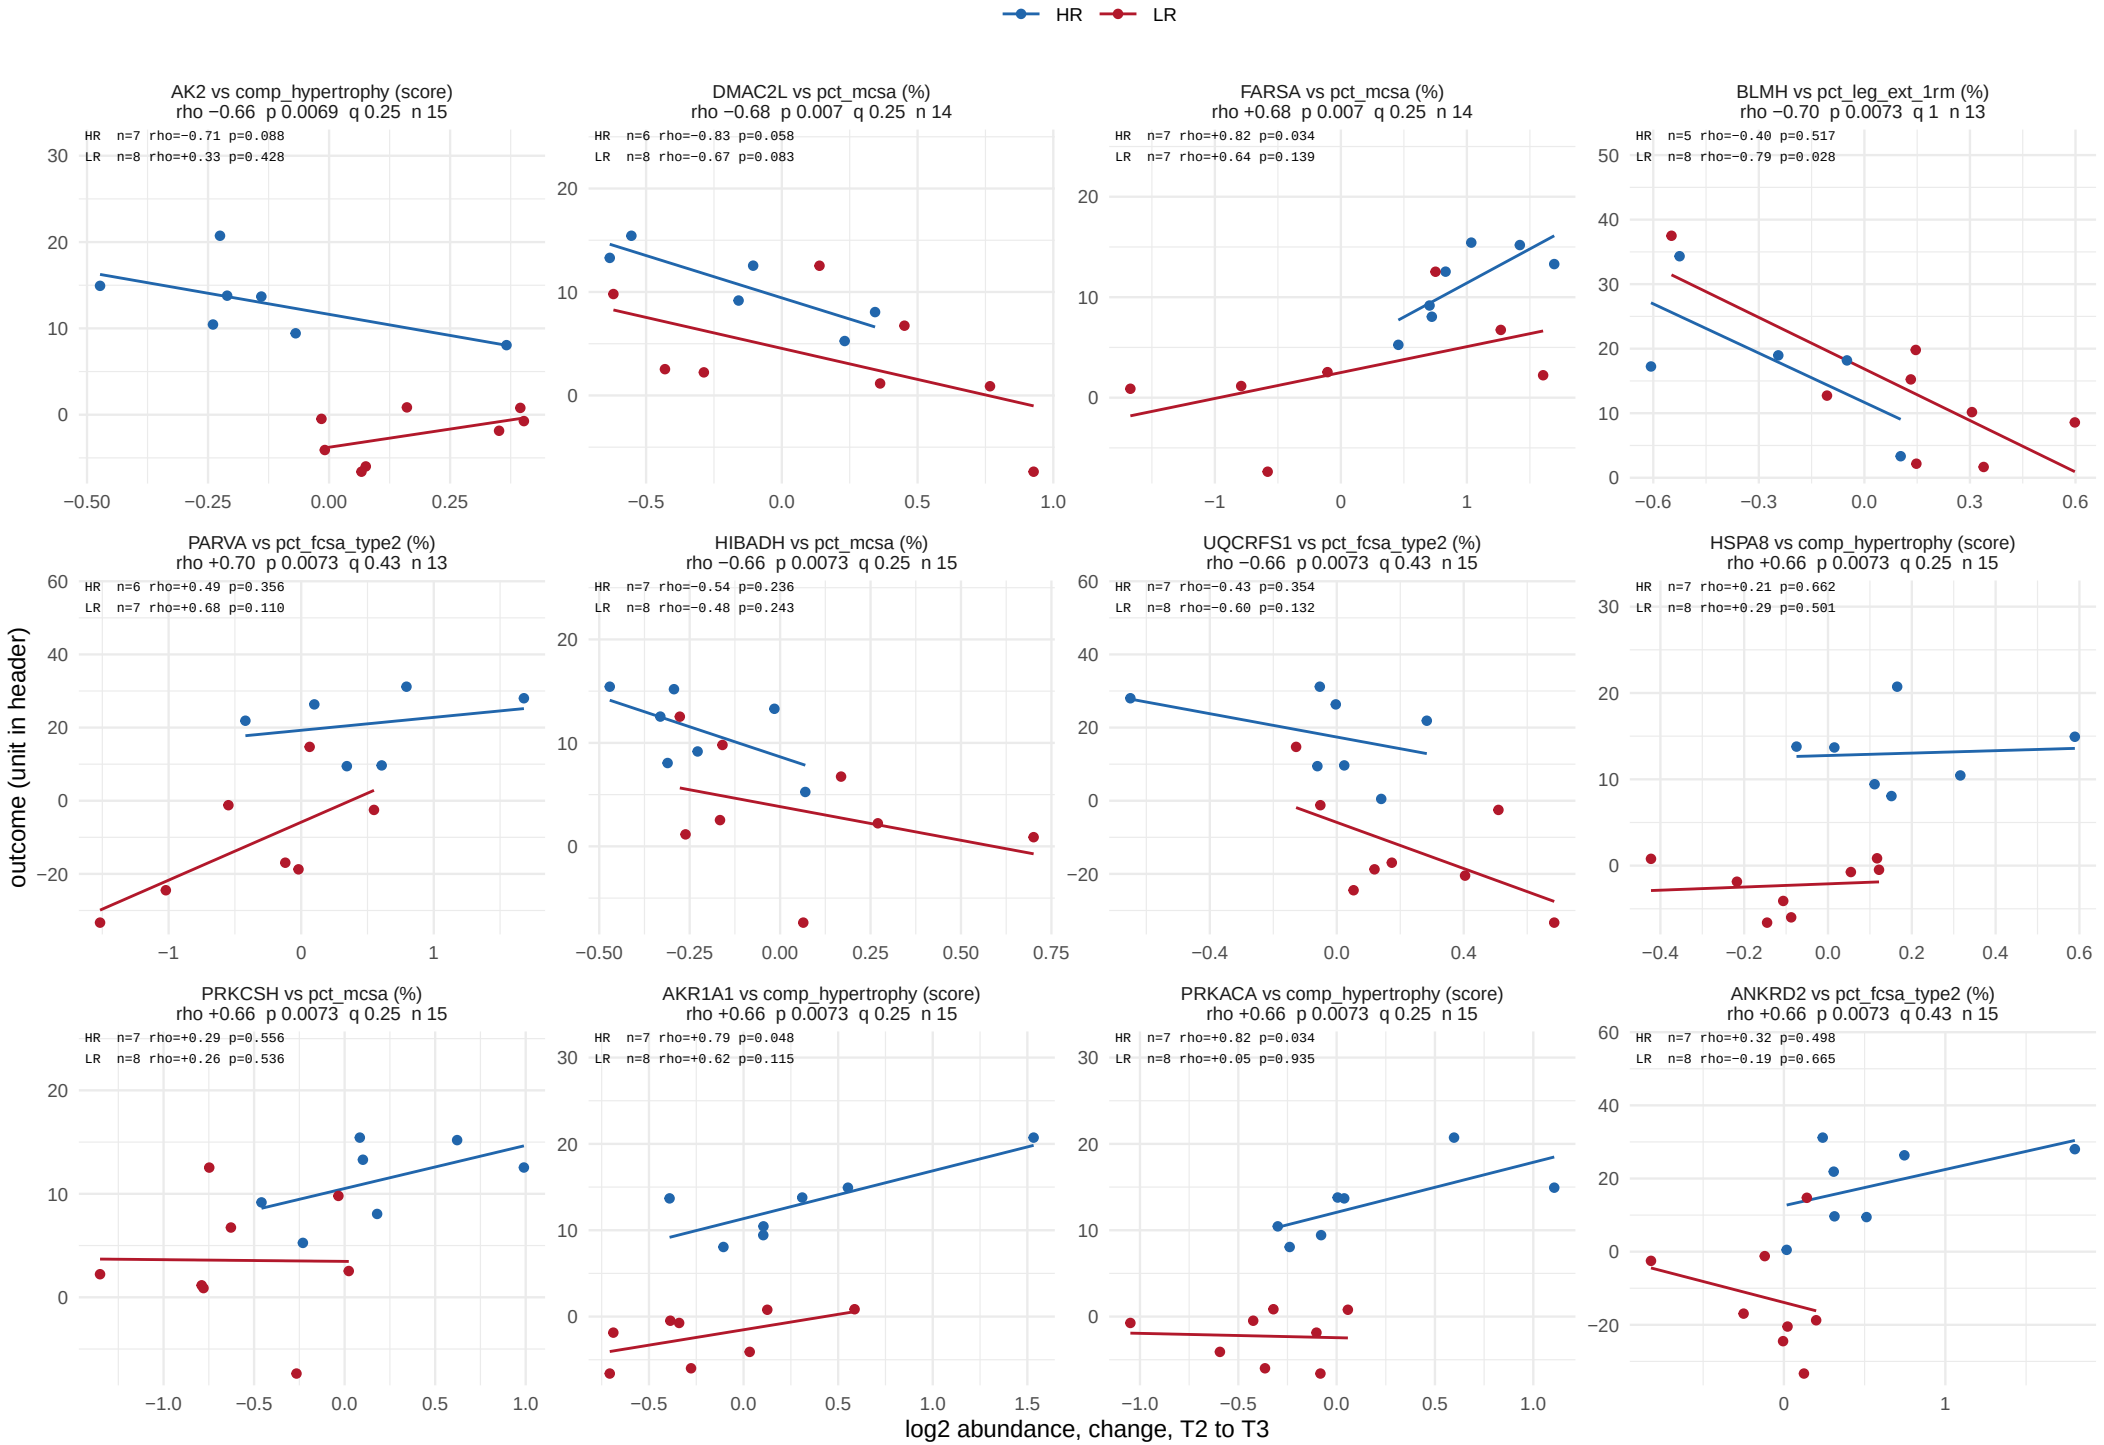

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


741 of 11747 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 13 of 62.

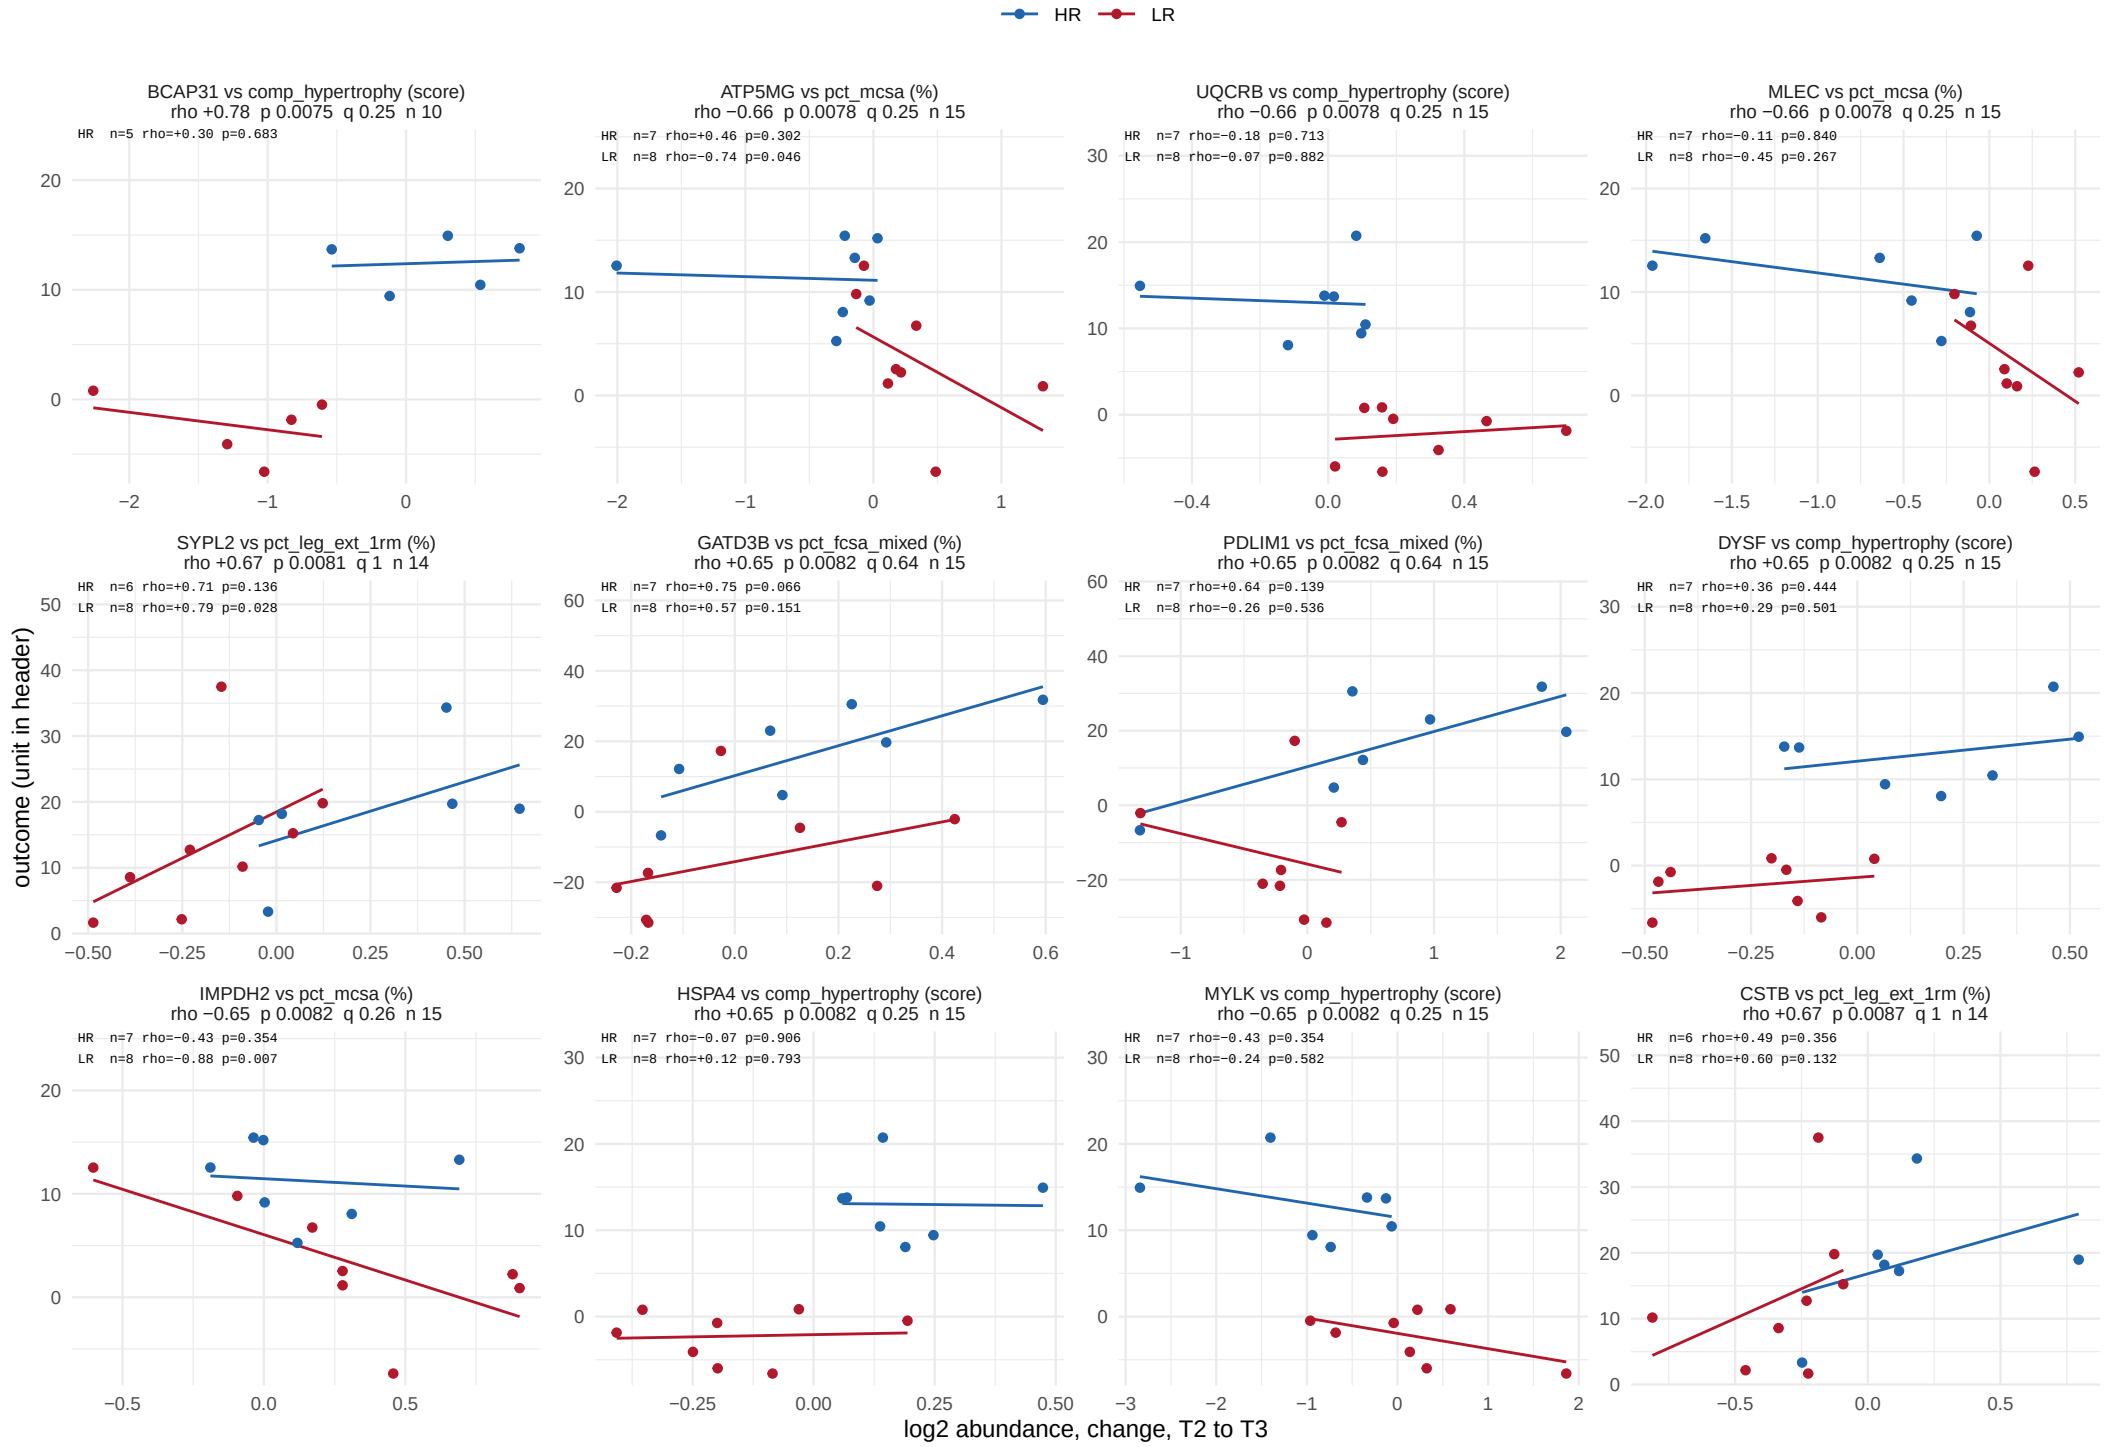

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


741 of 11747 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 14 of 62.

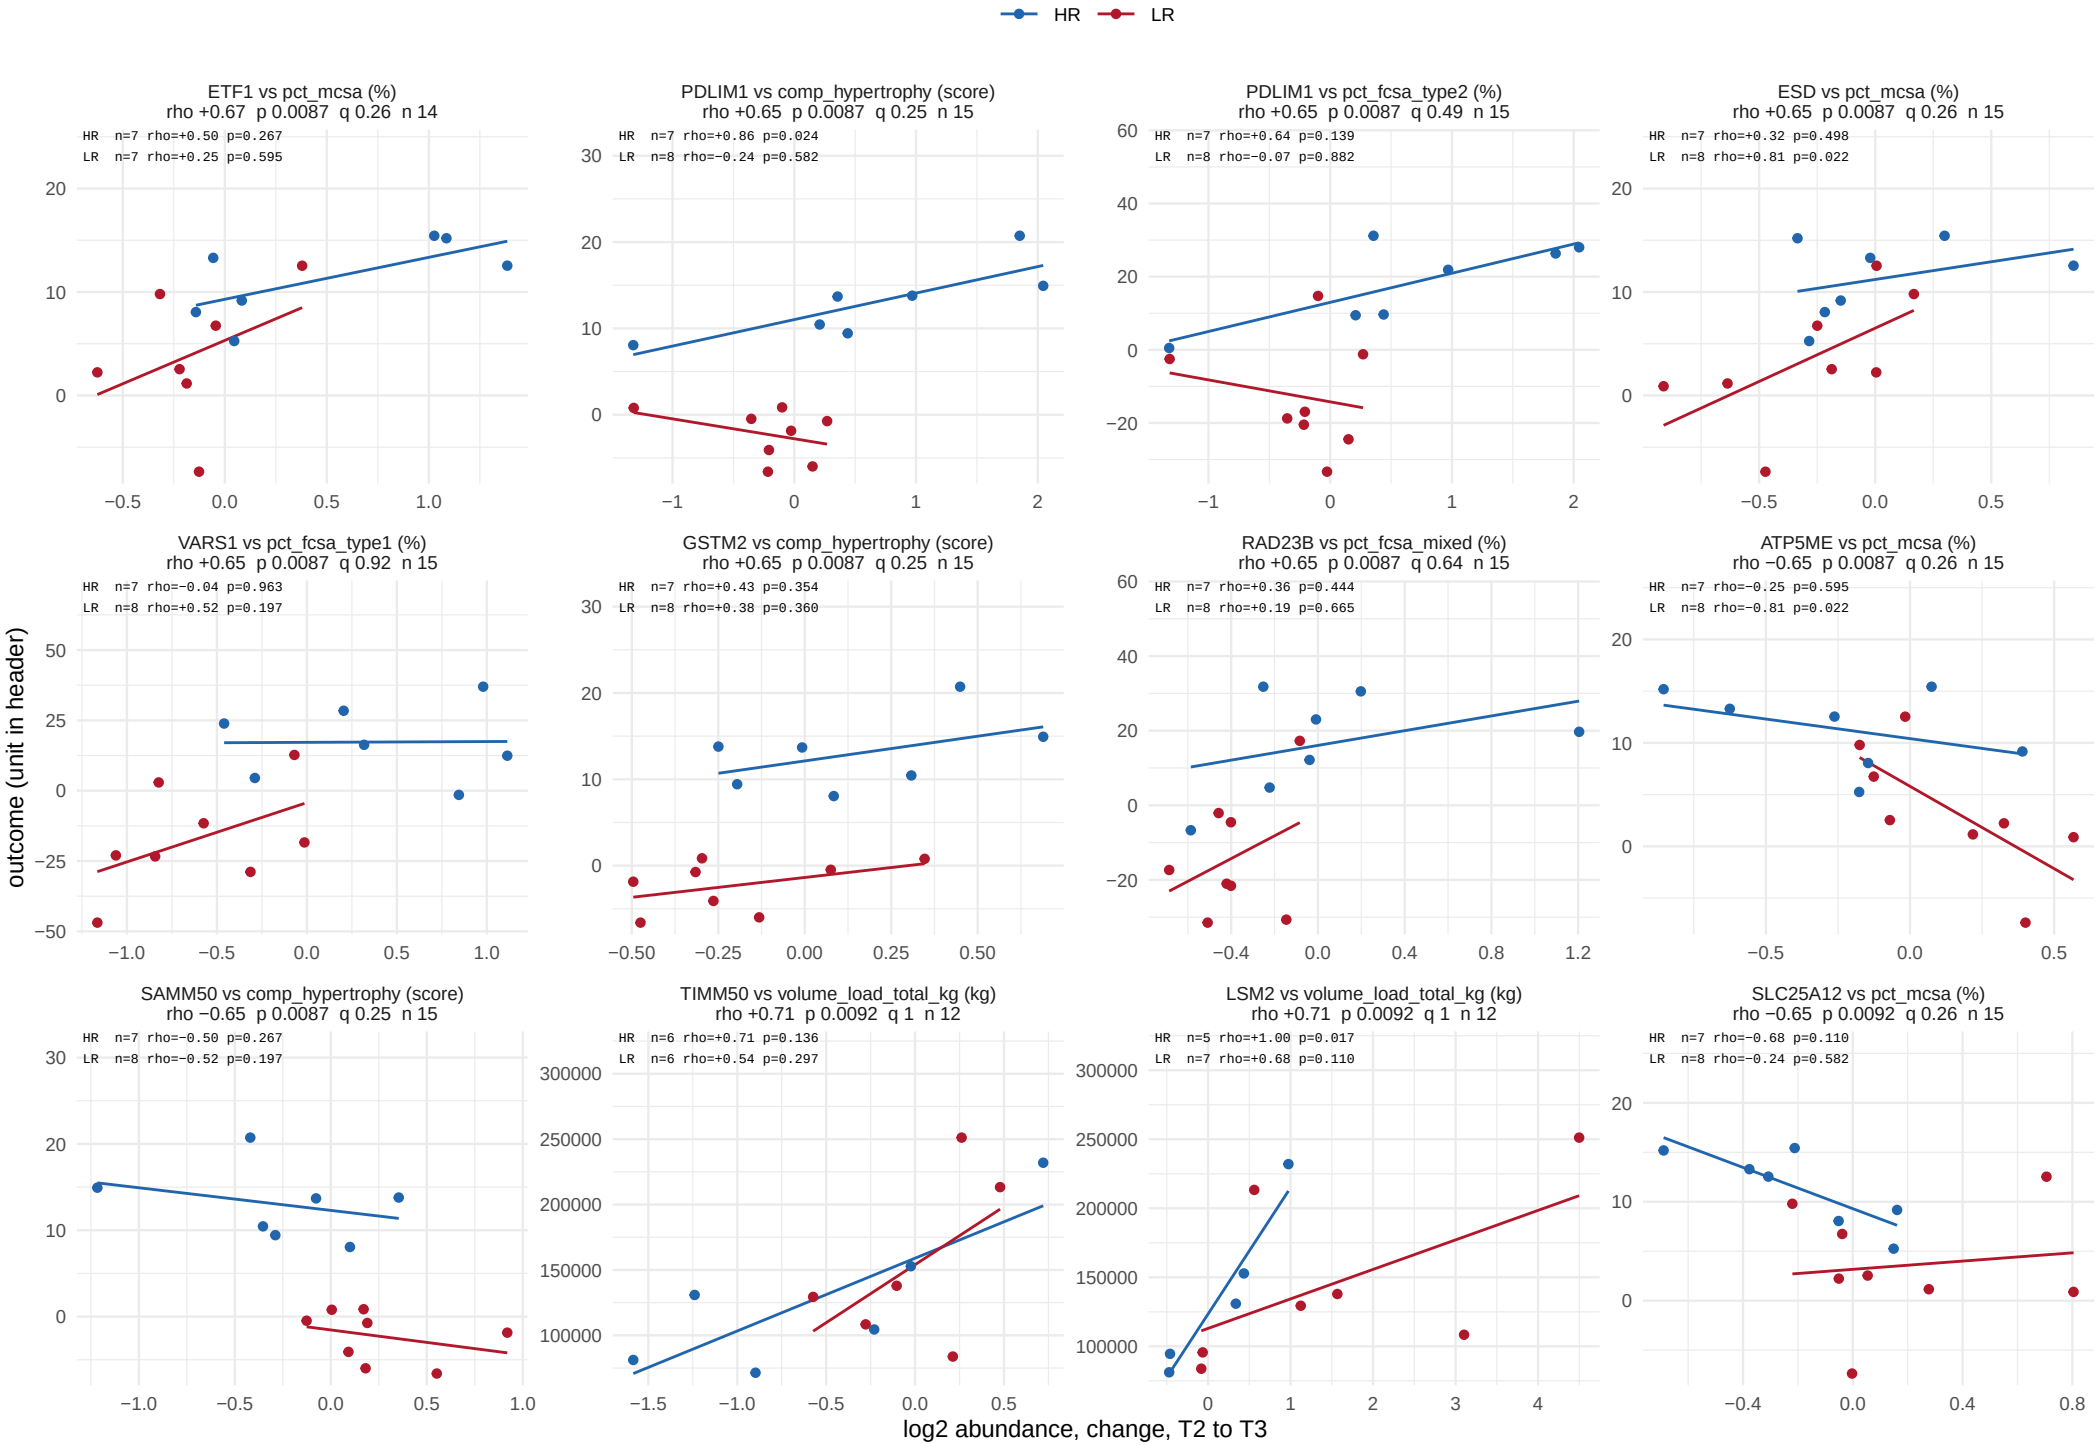

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


741 of 11747 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 15 of 62.

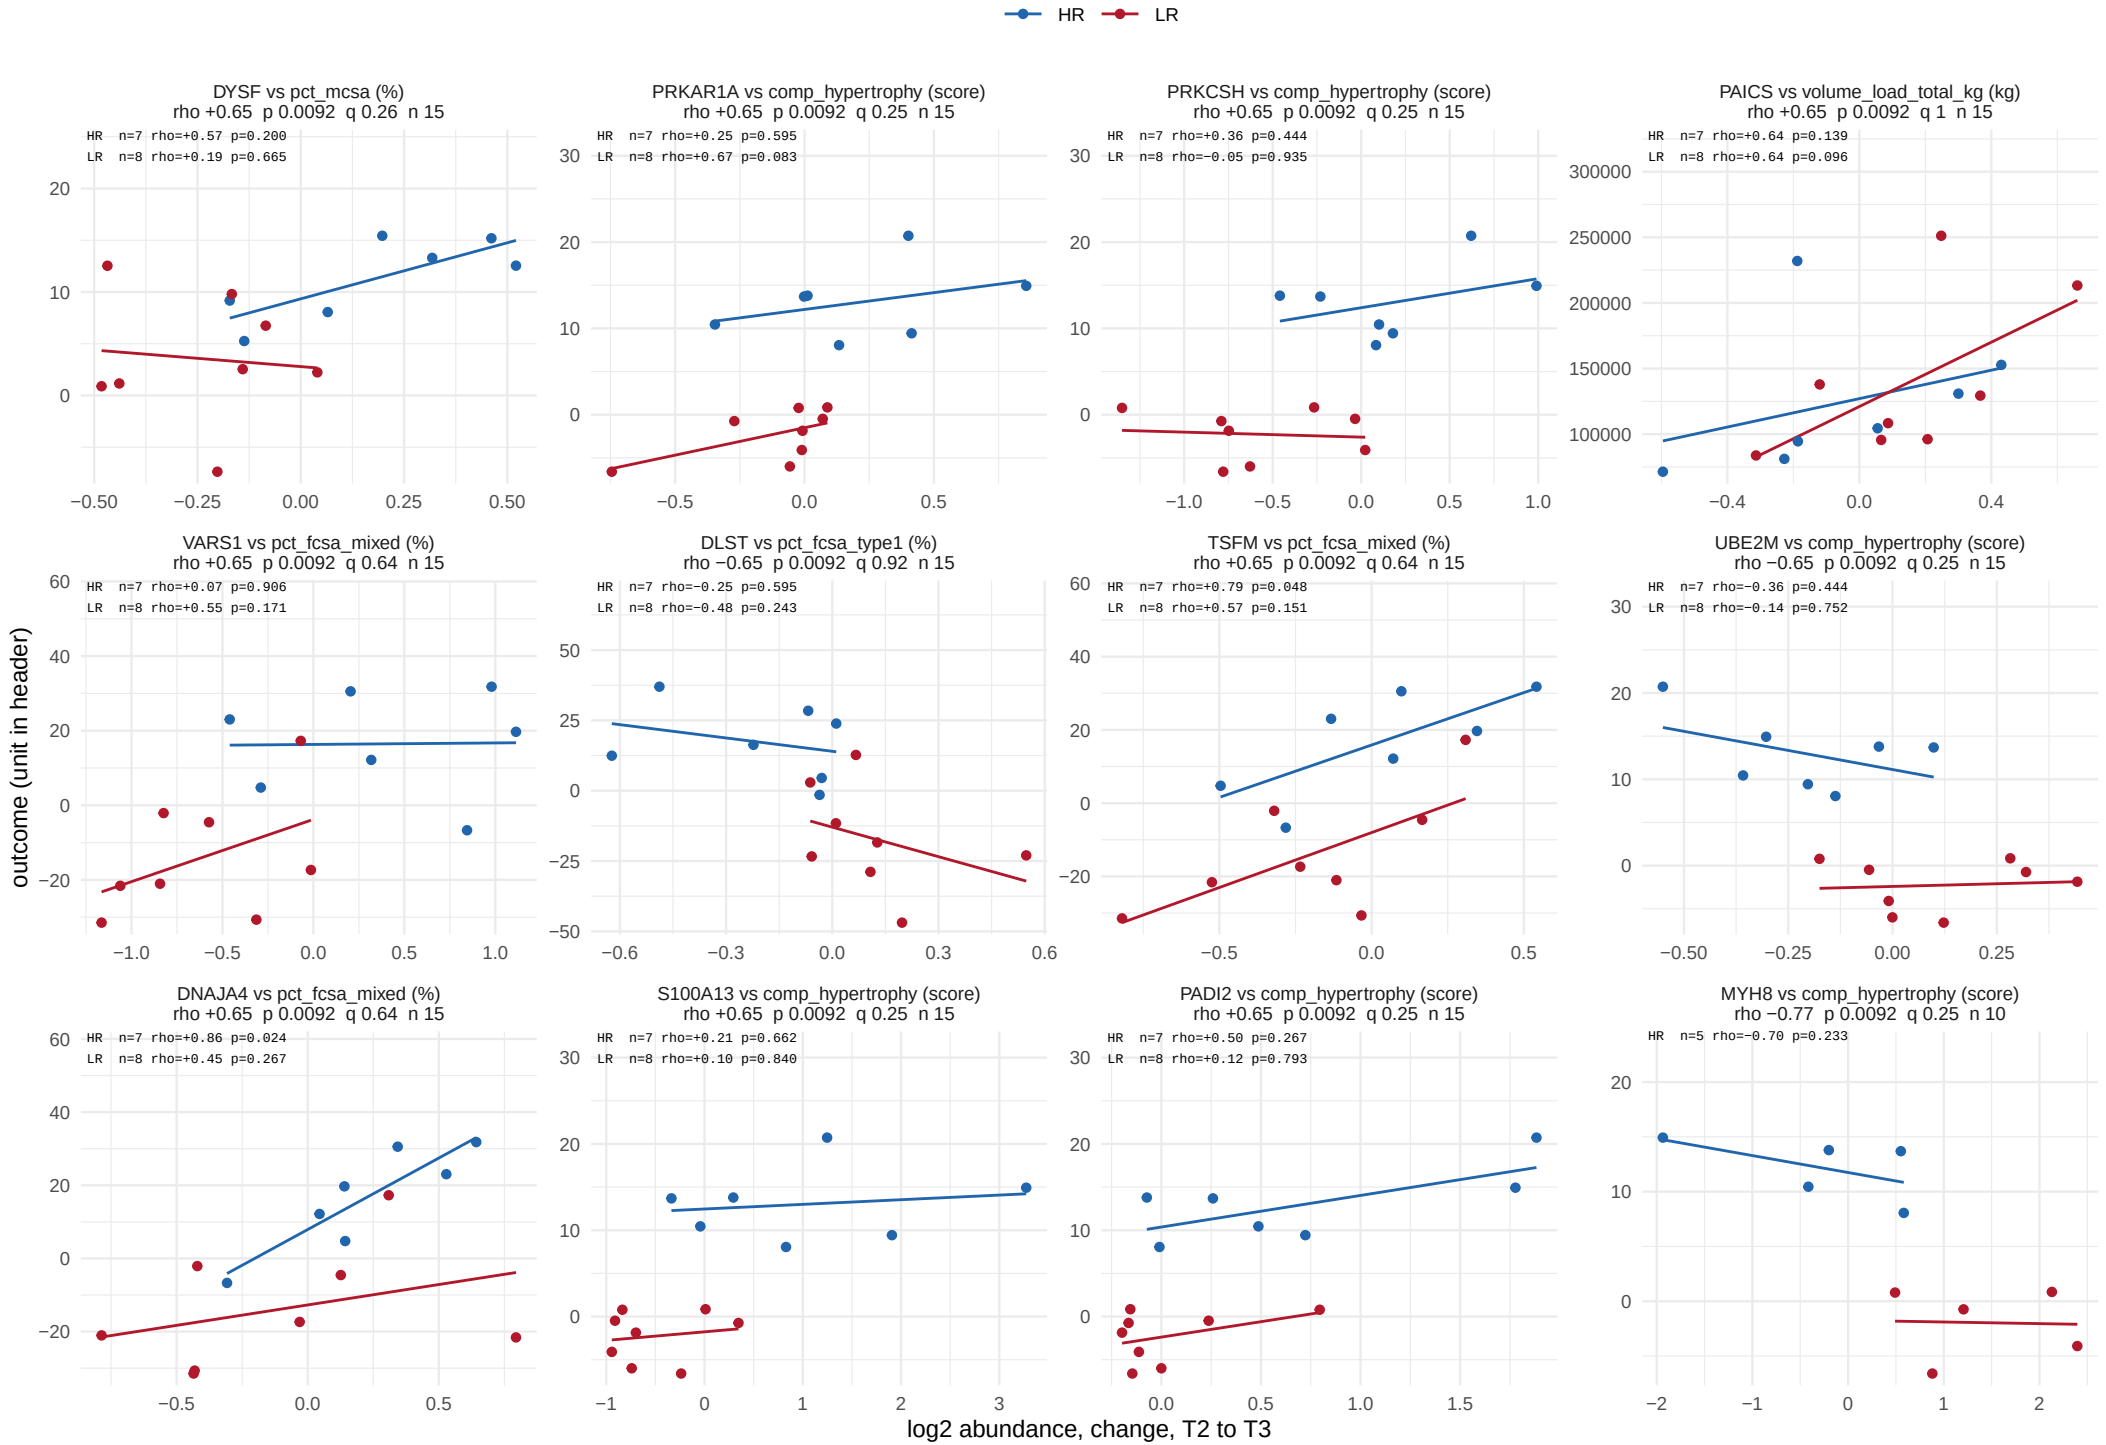

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


741 of 11747 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 16 of 62.

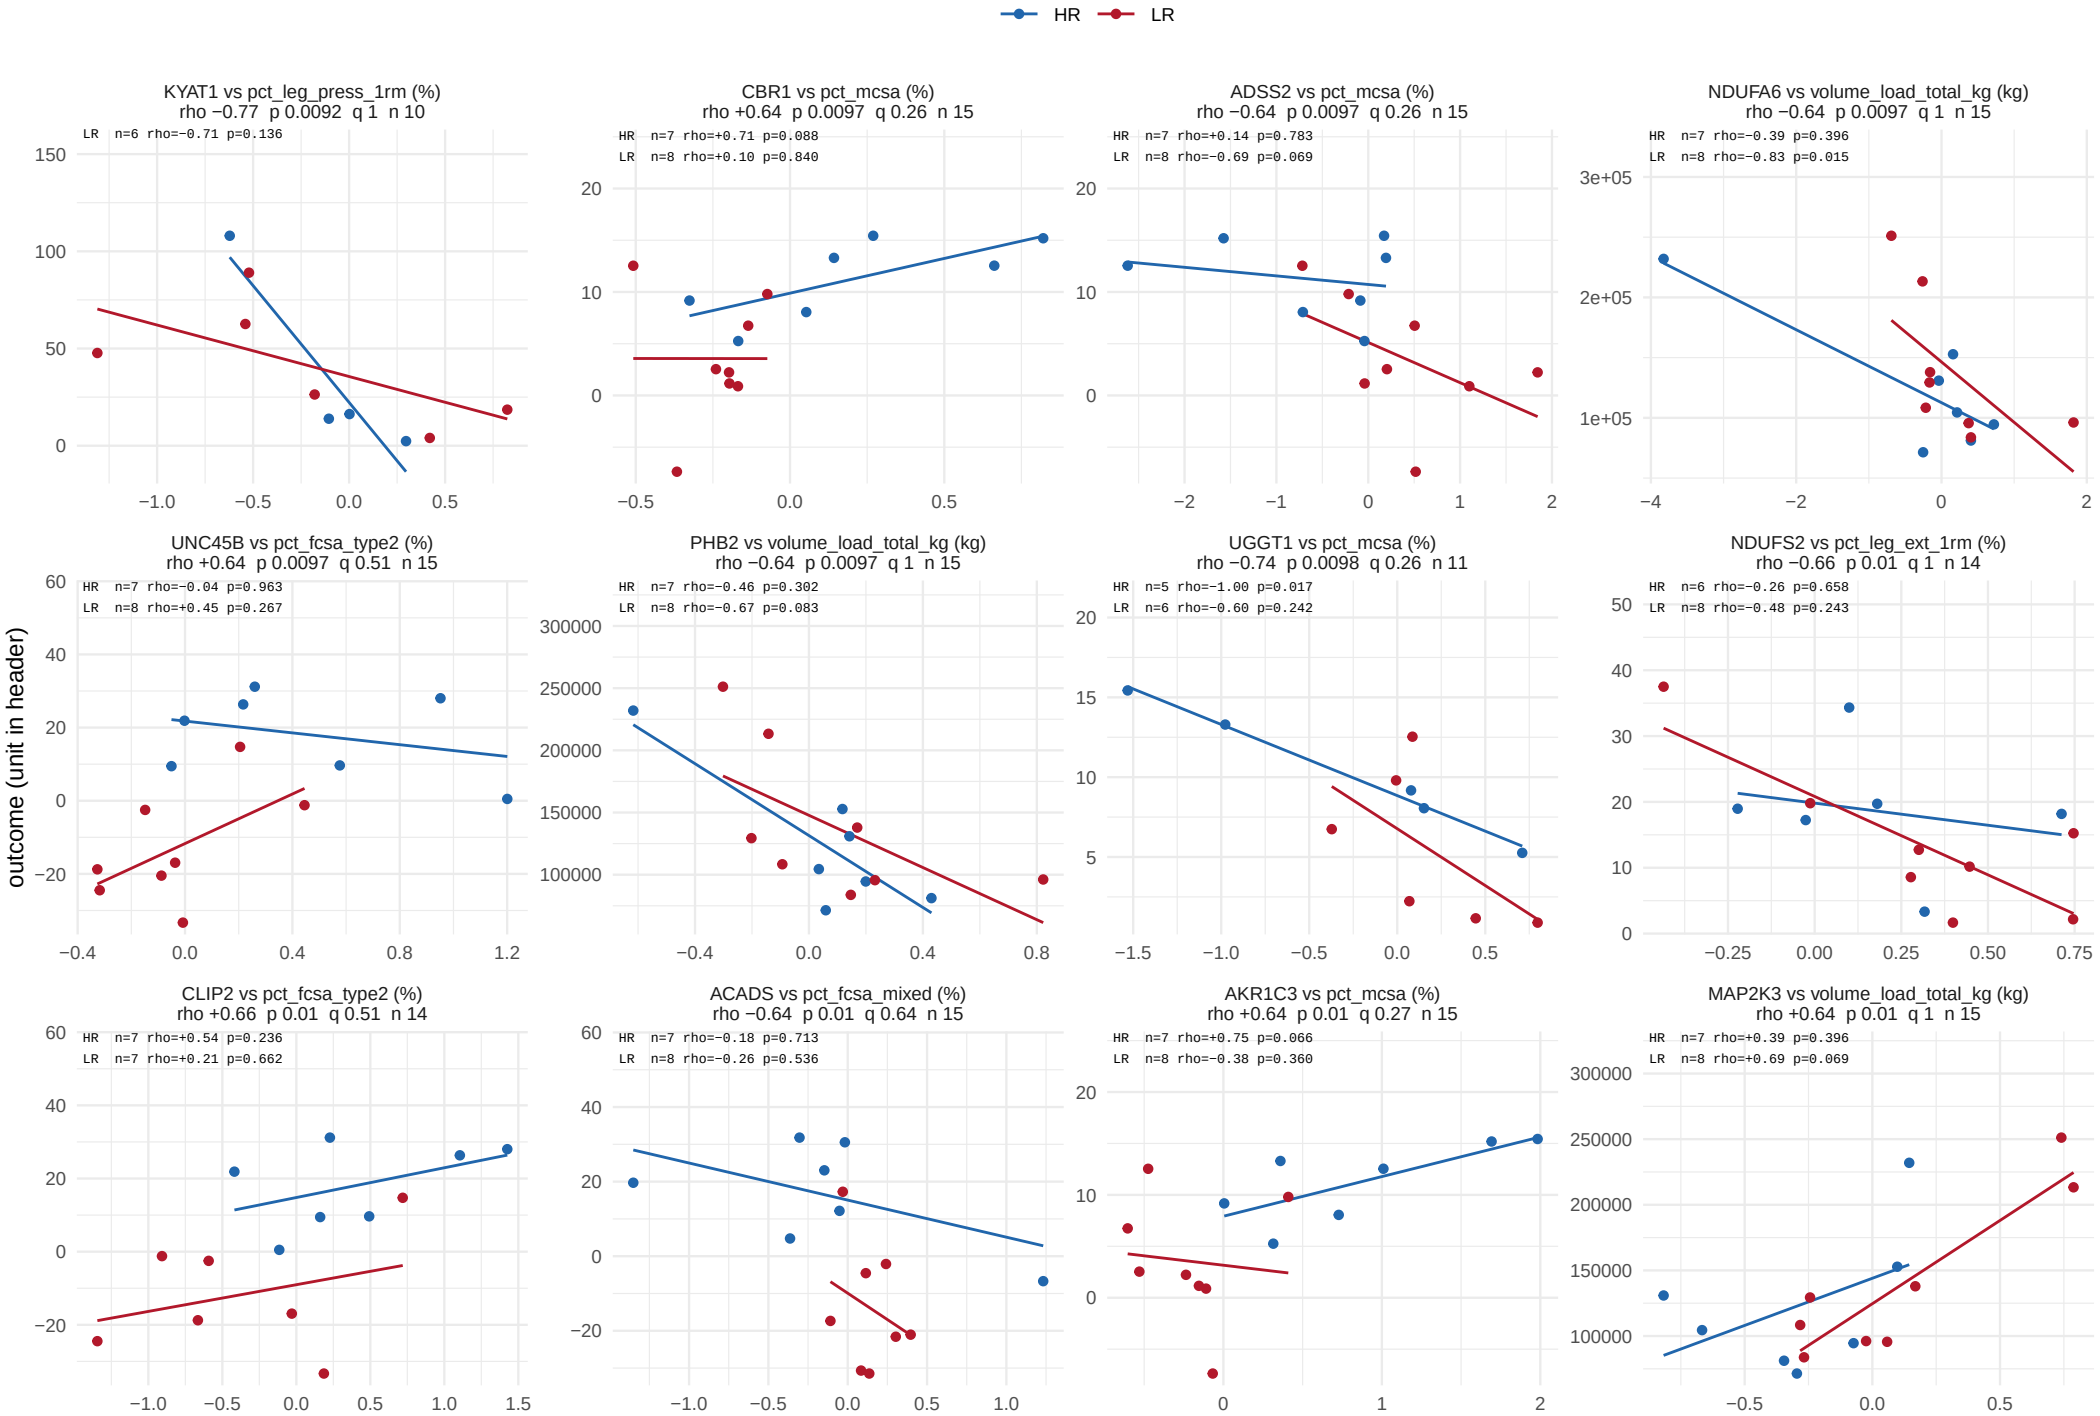

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


741 of 11747 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 17 of 62.

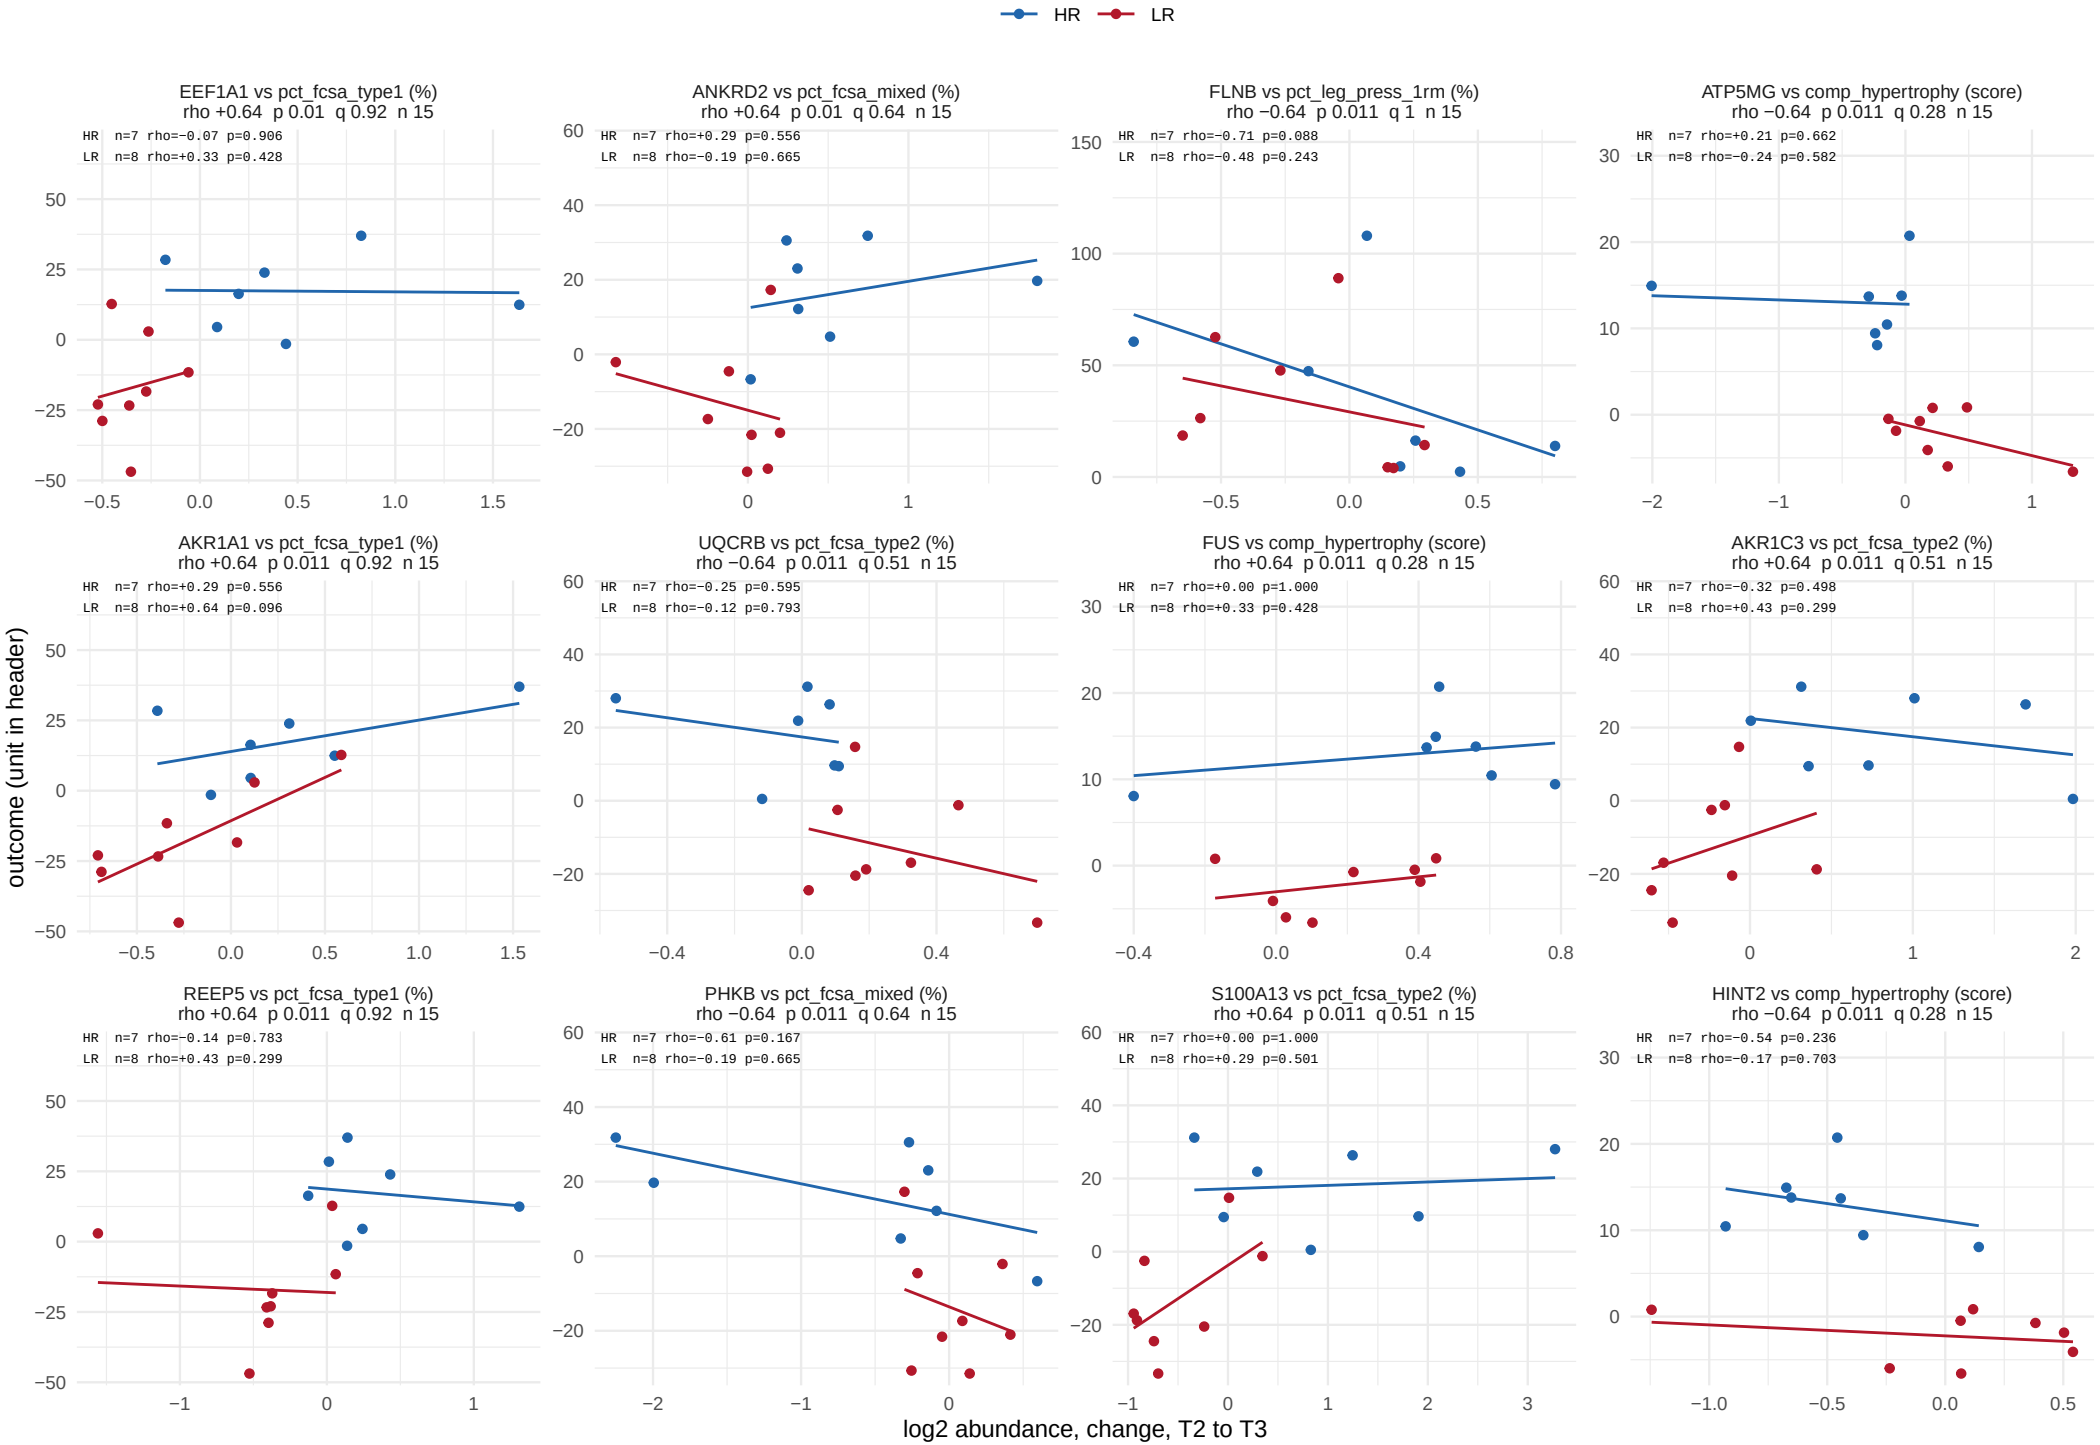

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


741 of 11747 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 18 of 62.

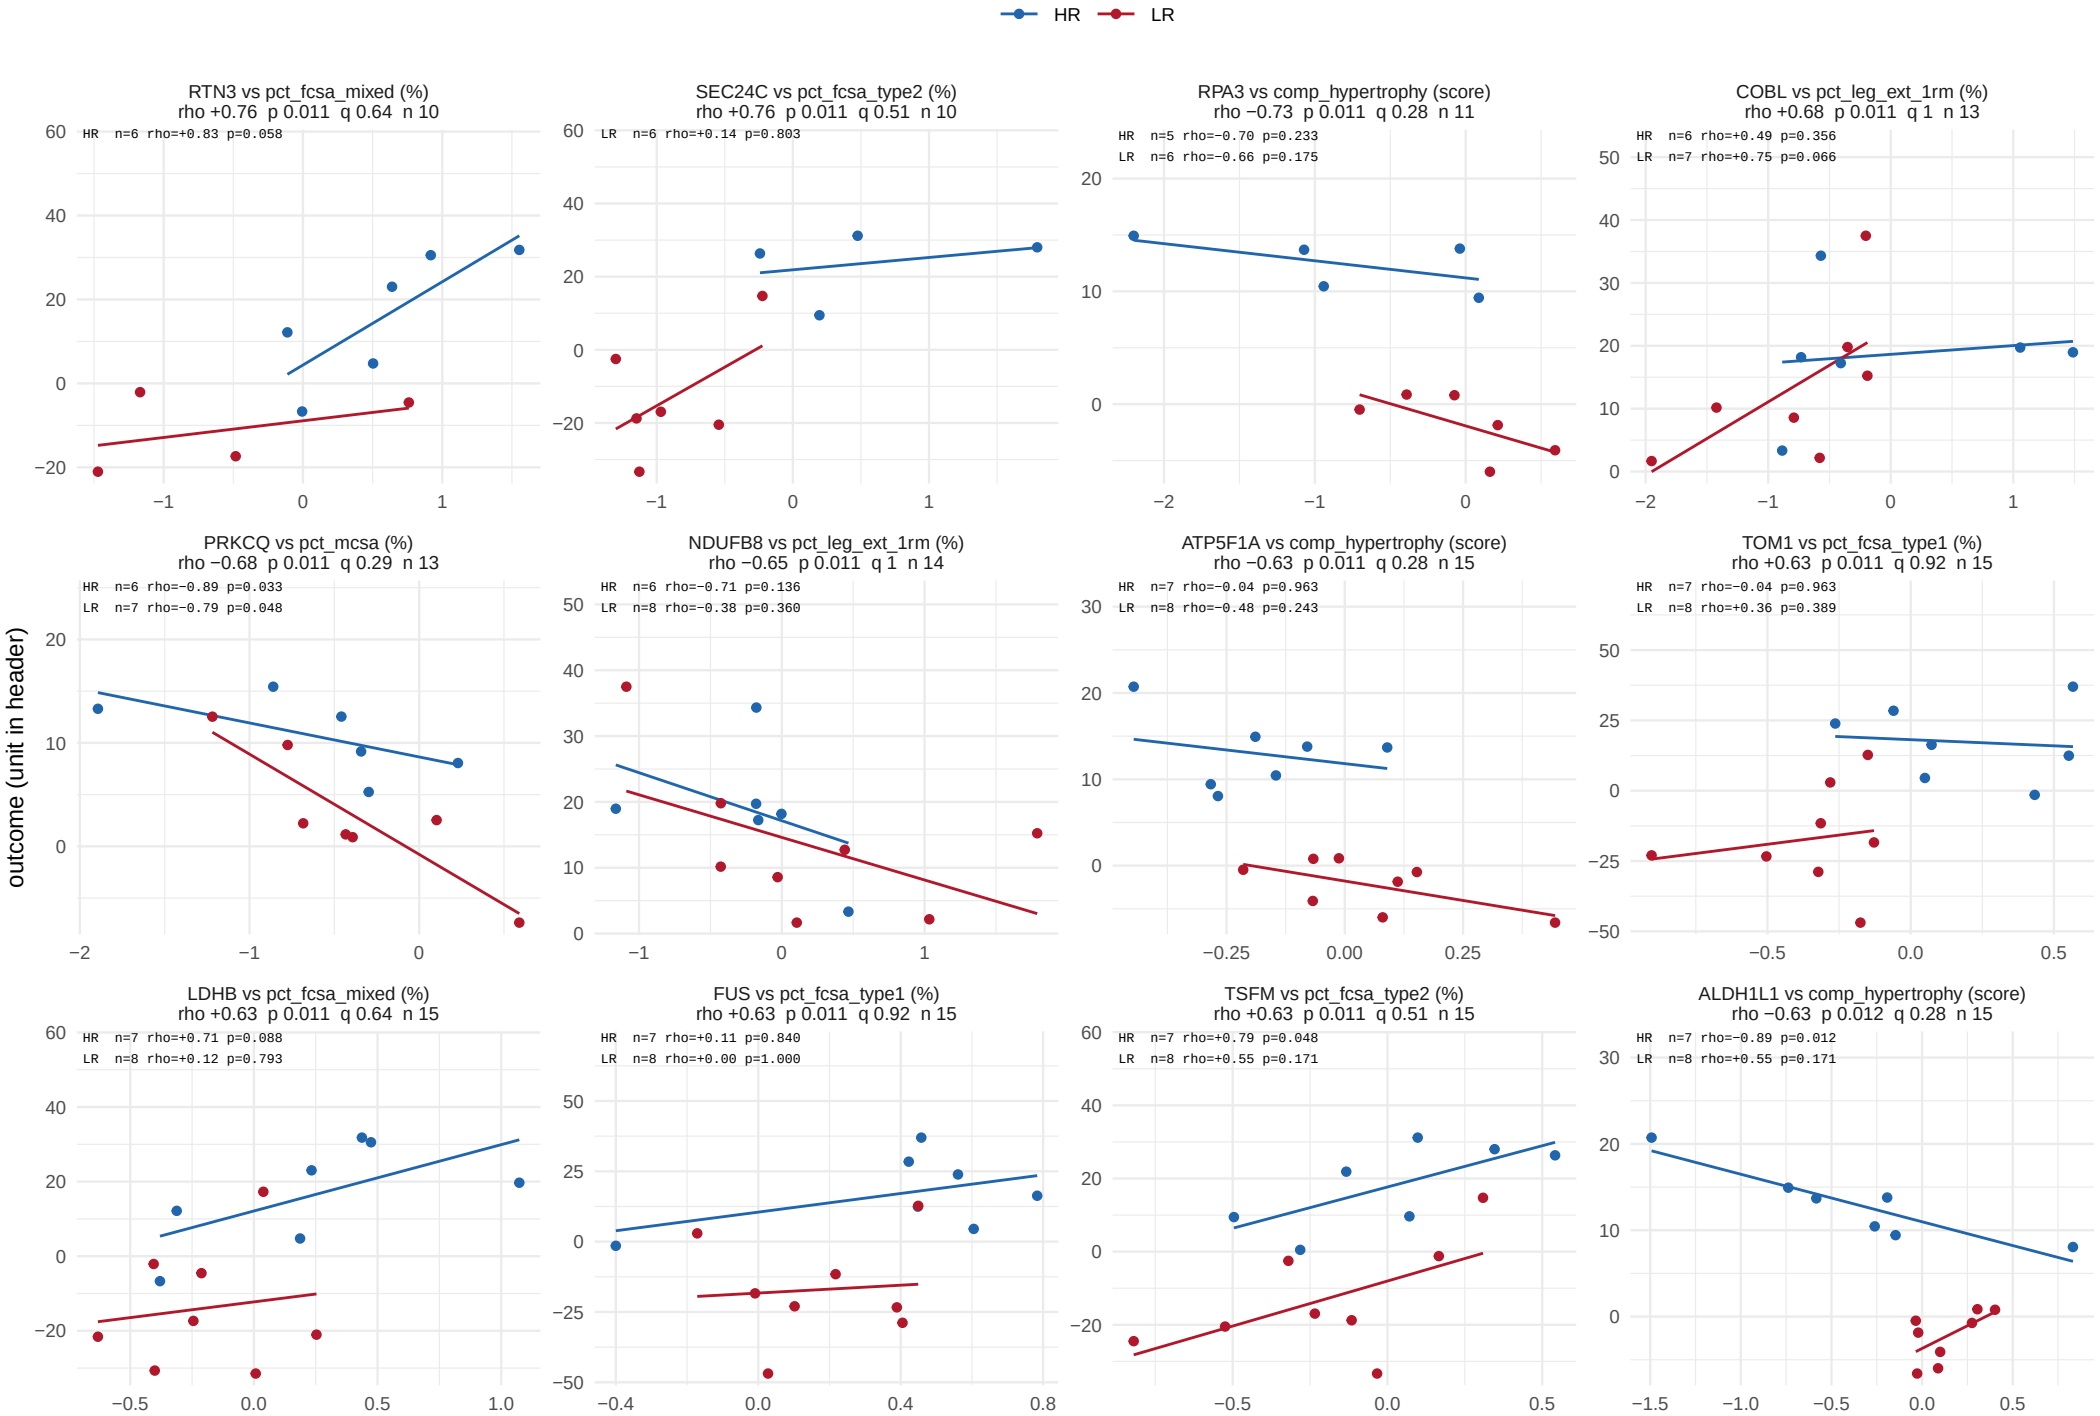

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


741 of 11747 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 19 of 62.

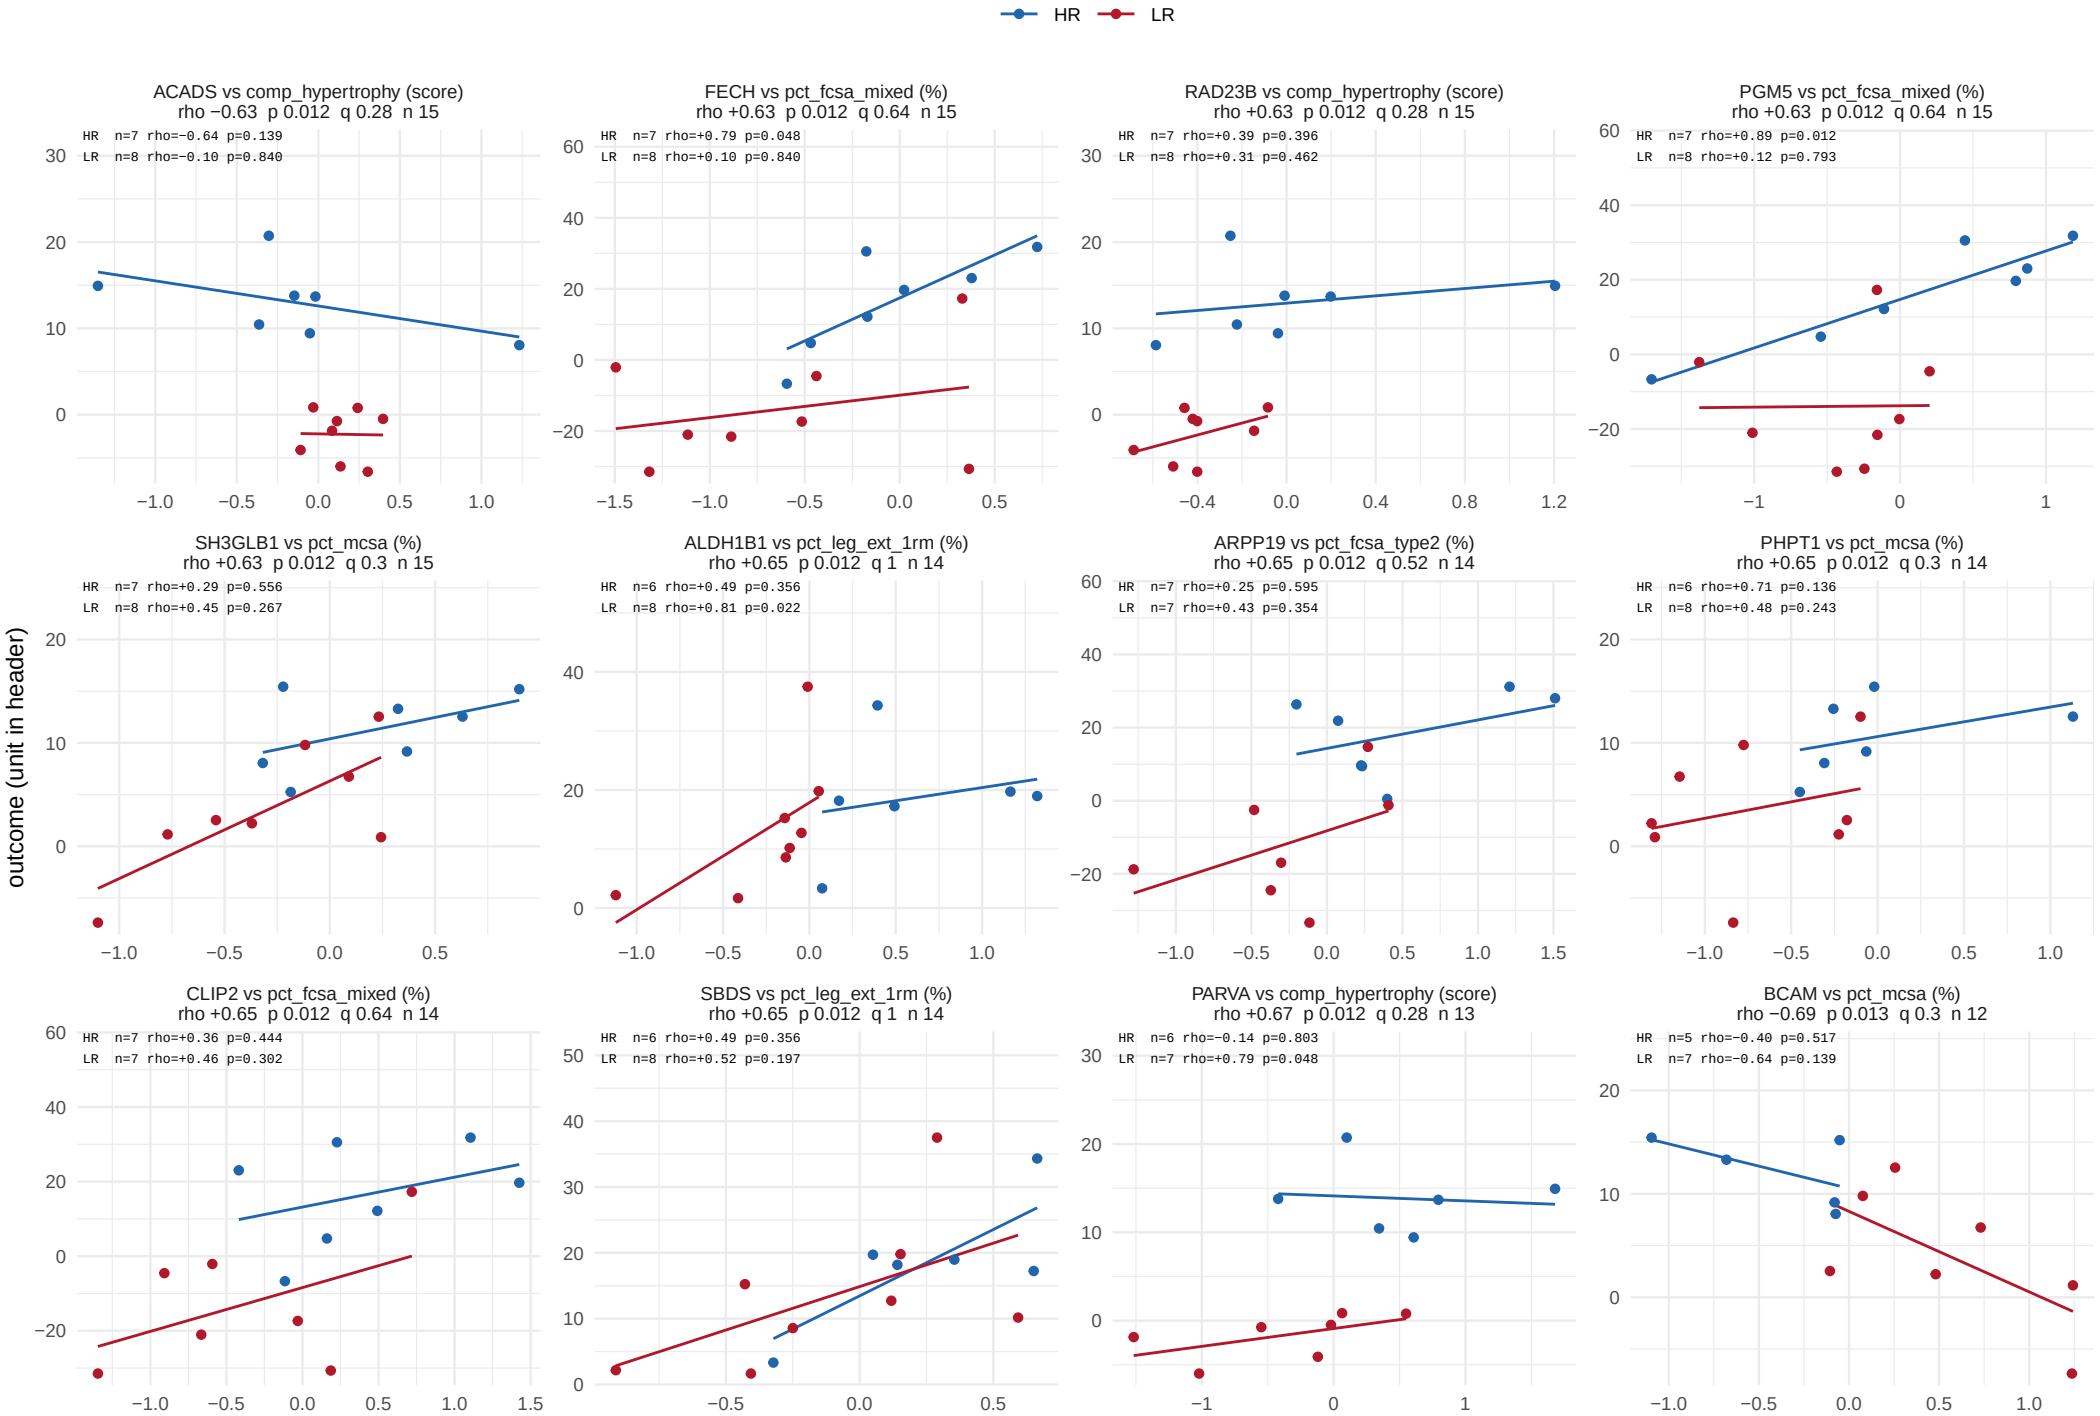

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


741 of 11747 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 20 of 62.

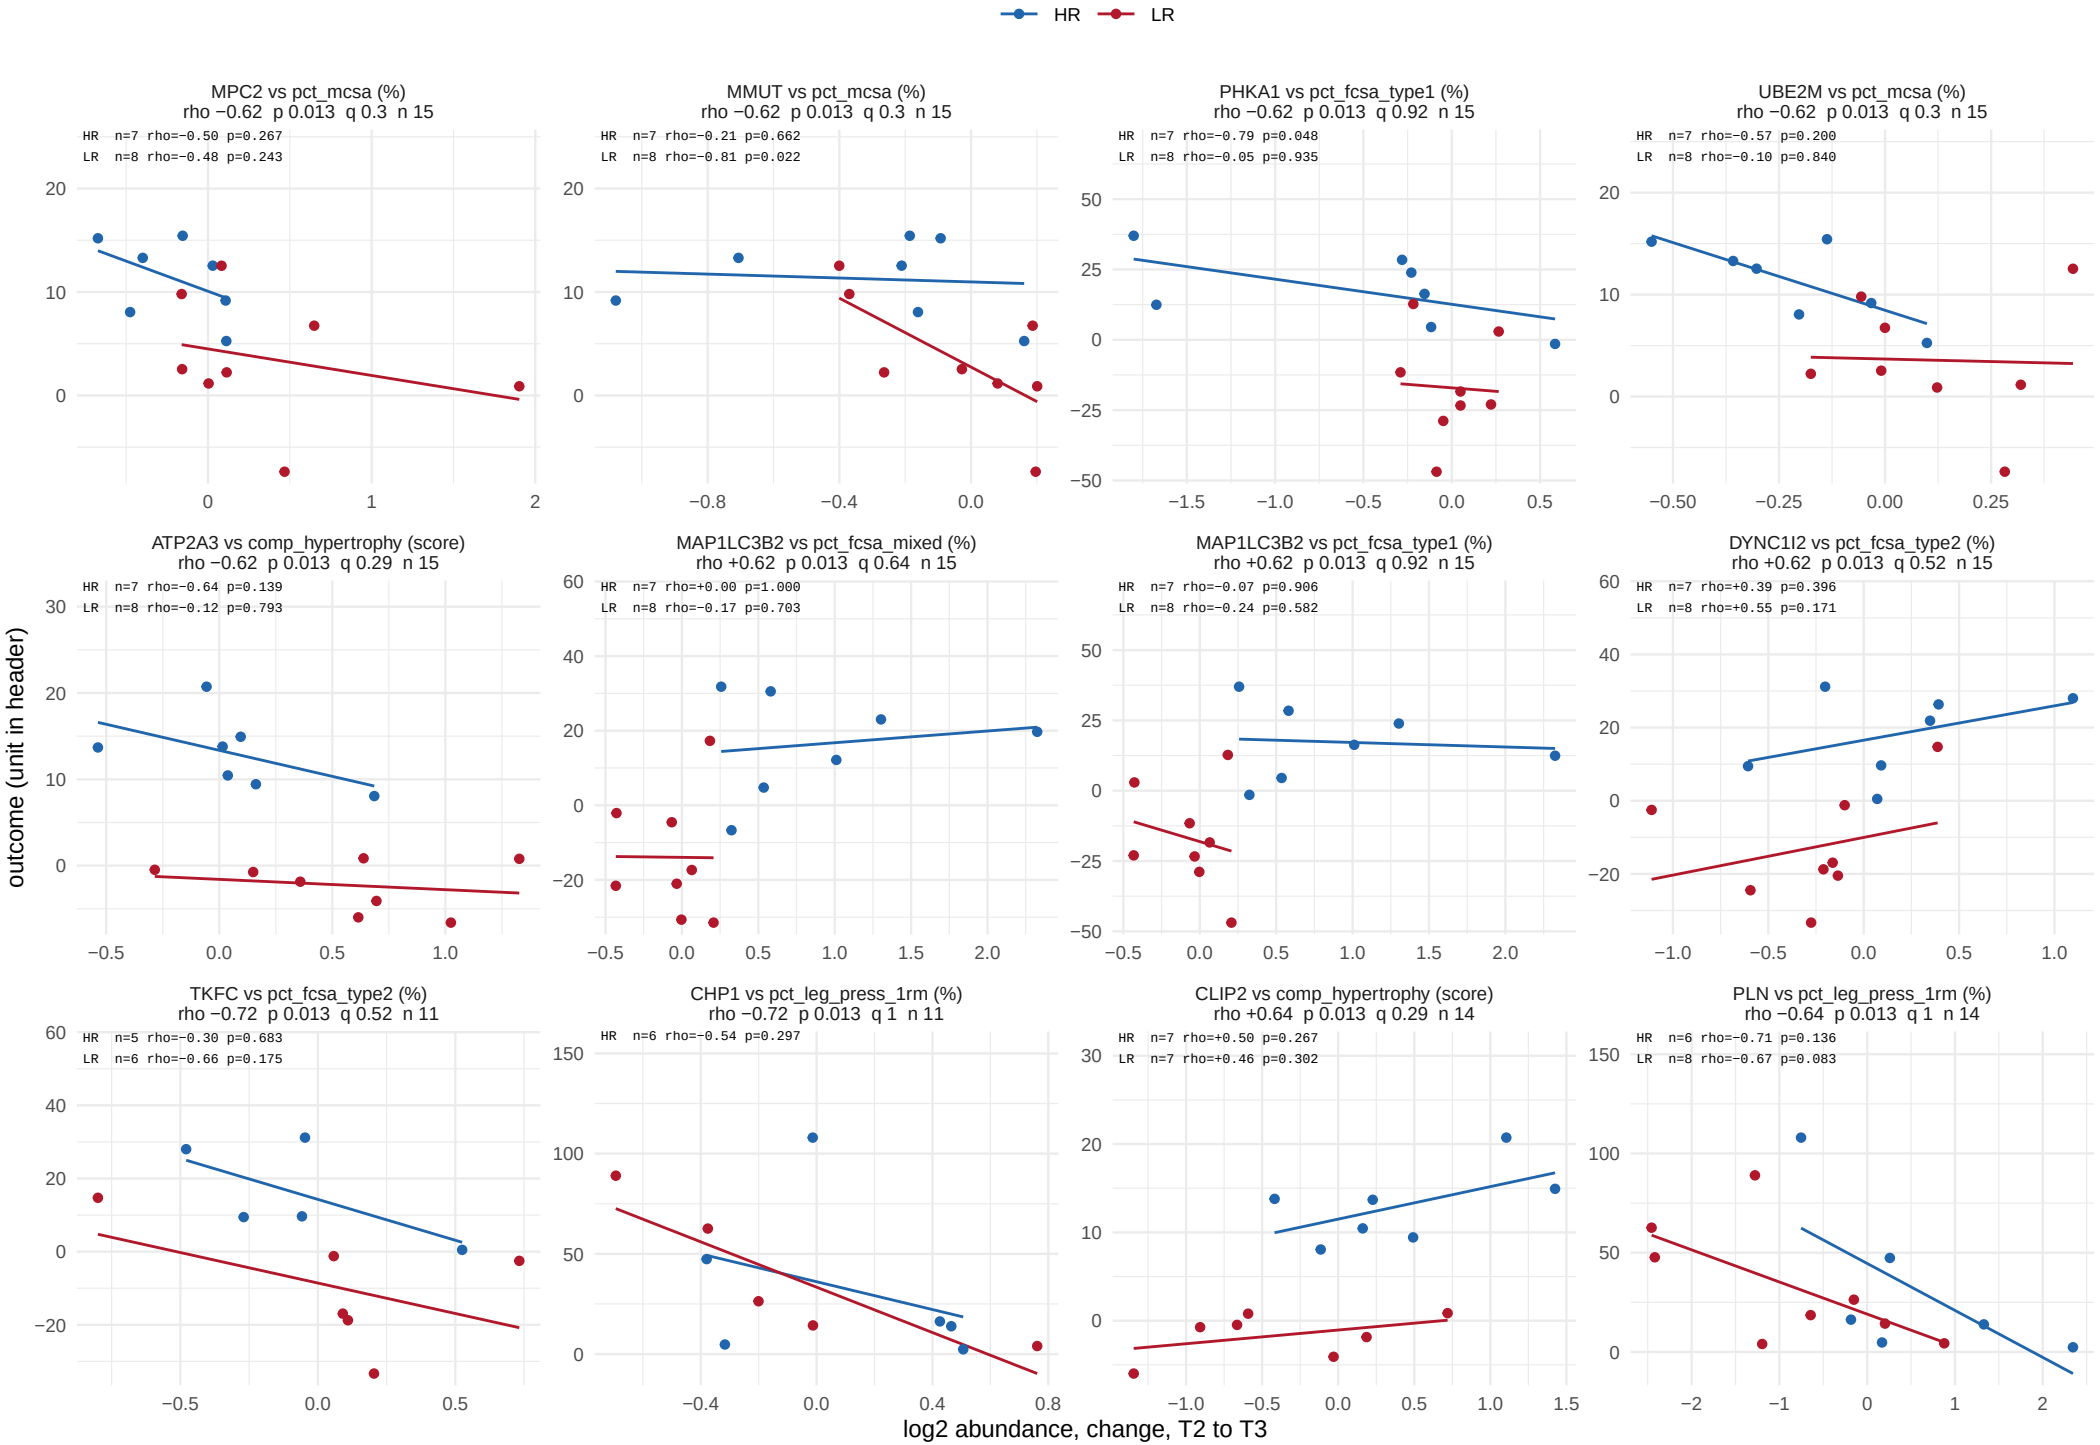

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


741 of 11747 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 21 of 62.

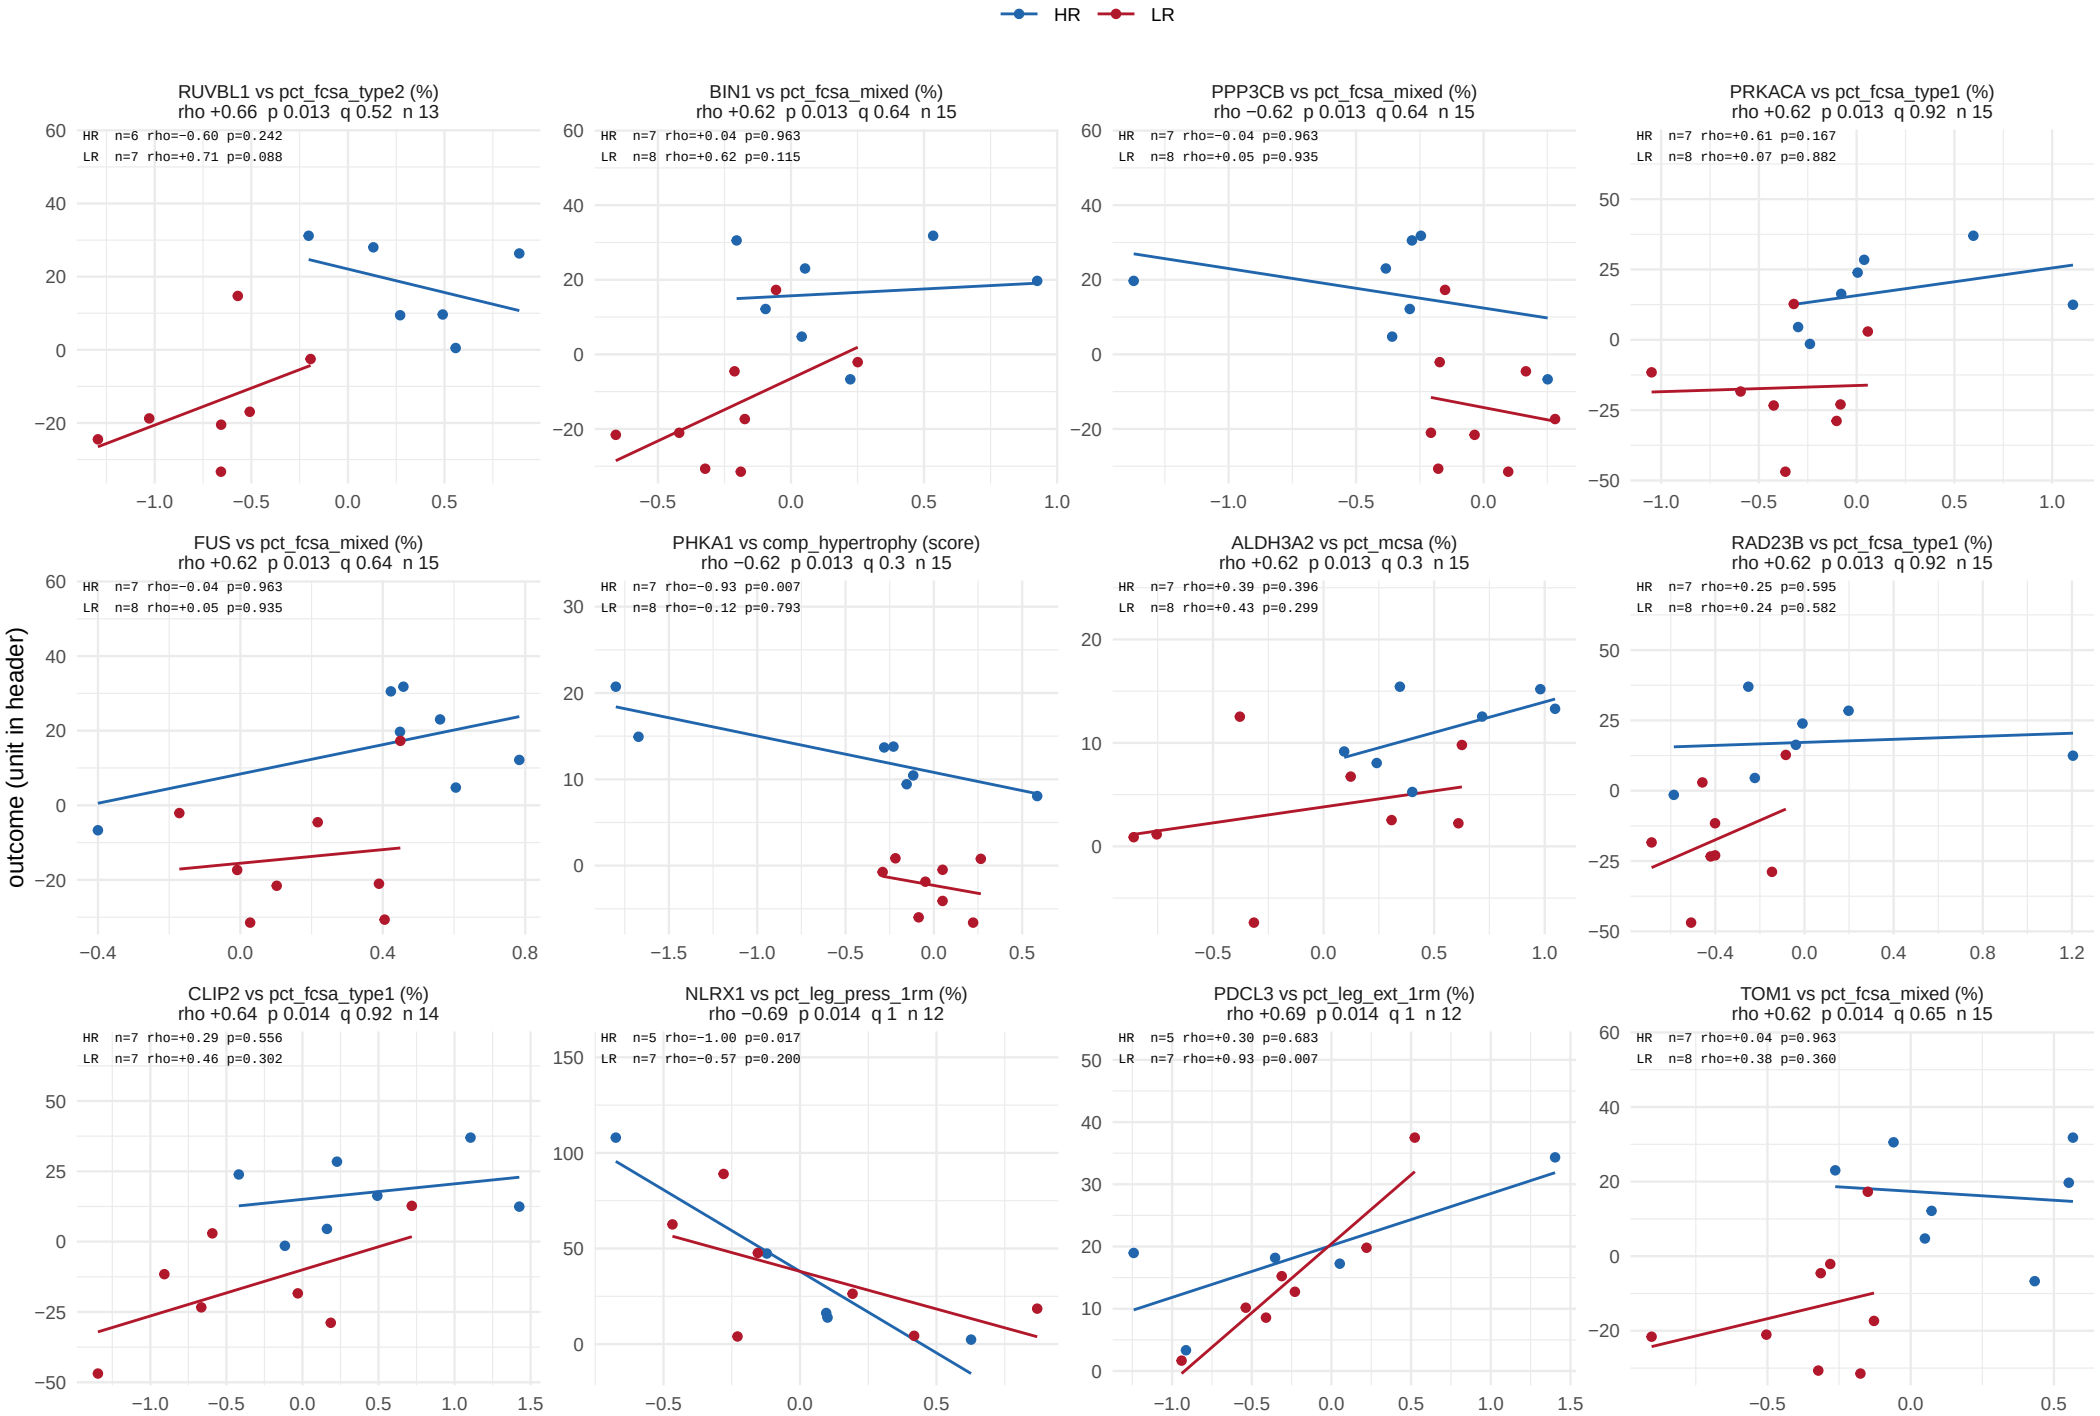

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


741 of 11747 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 22 of 62.

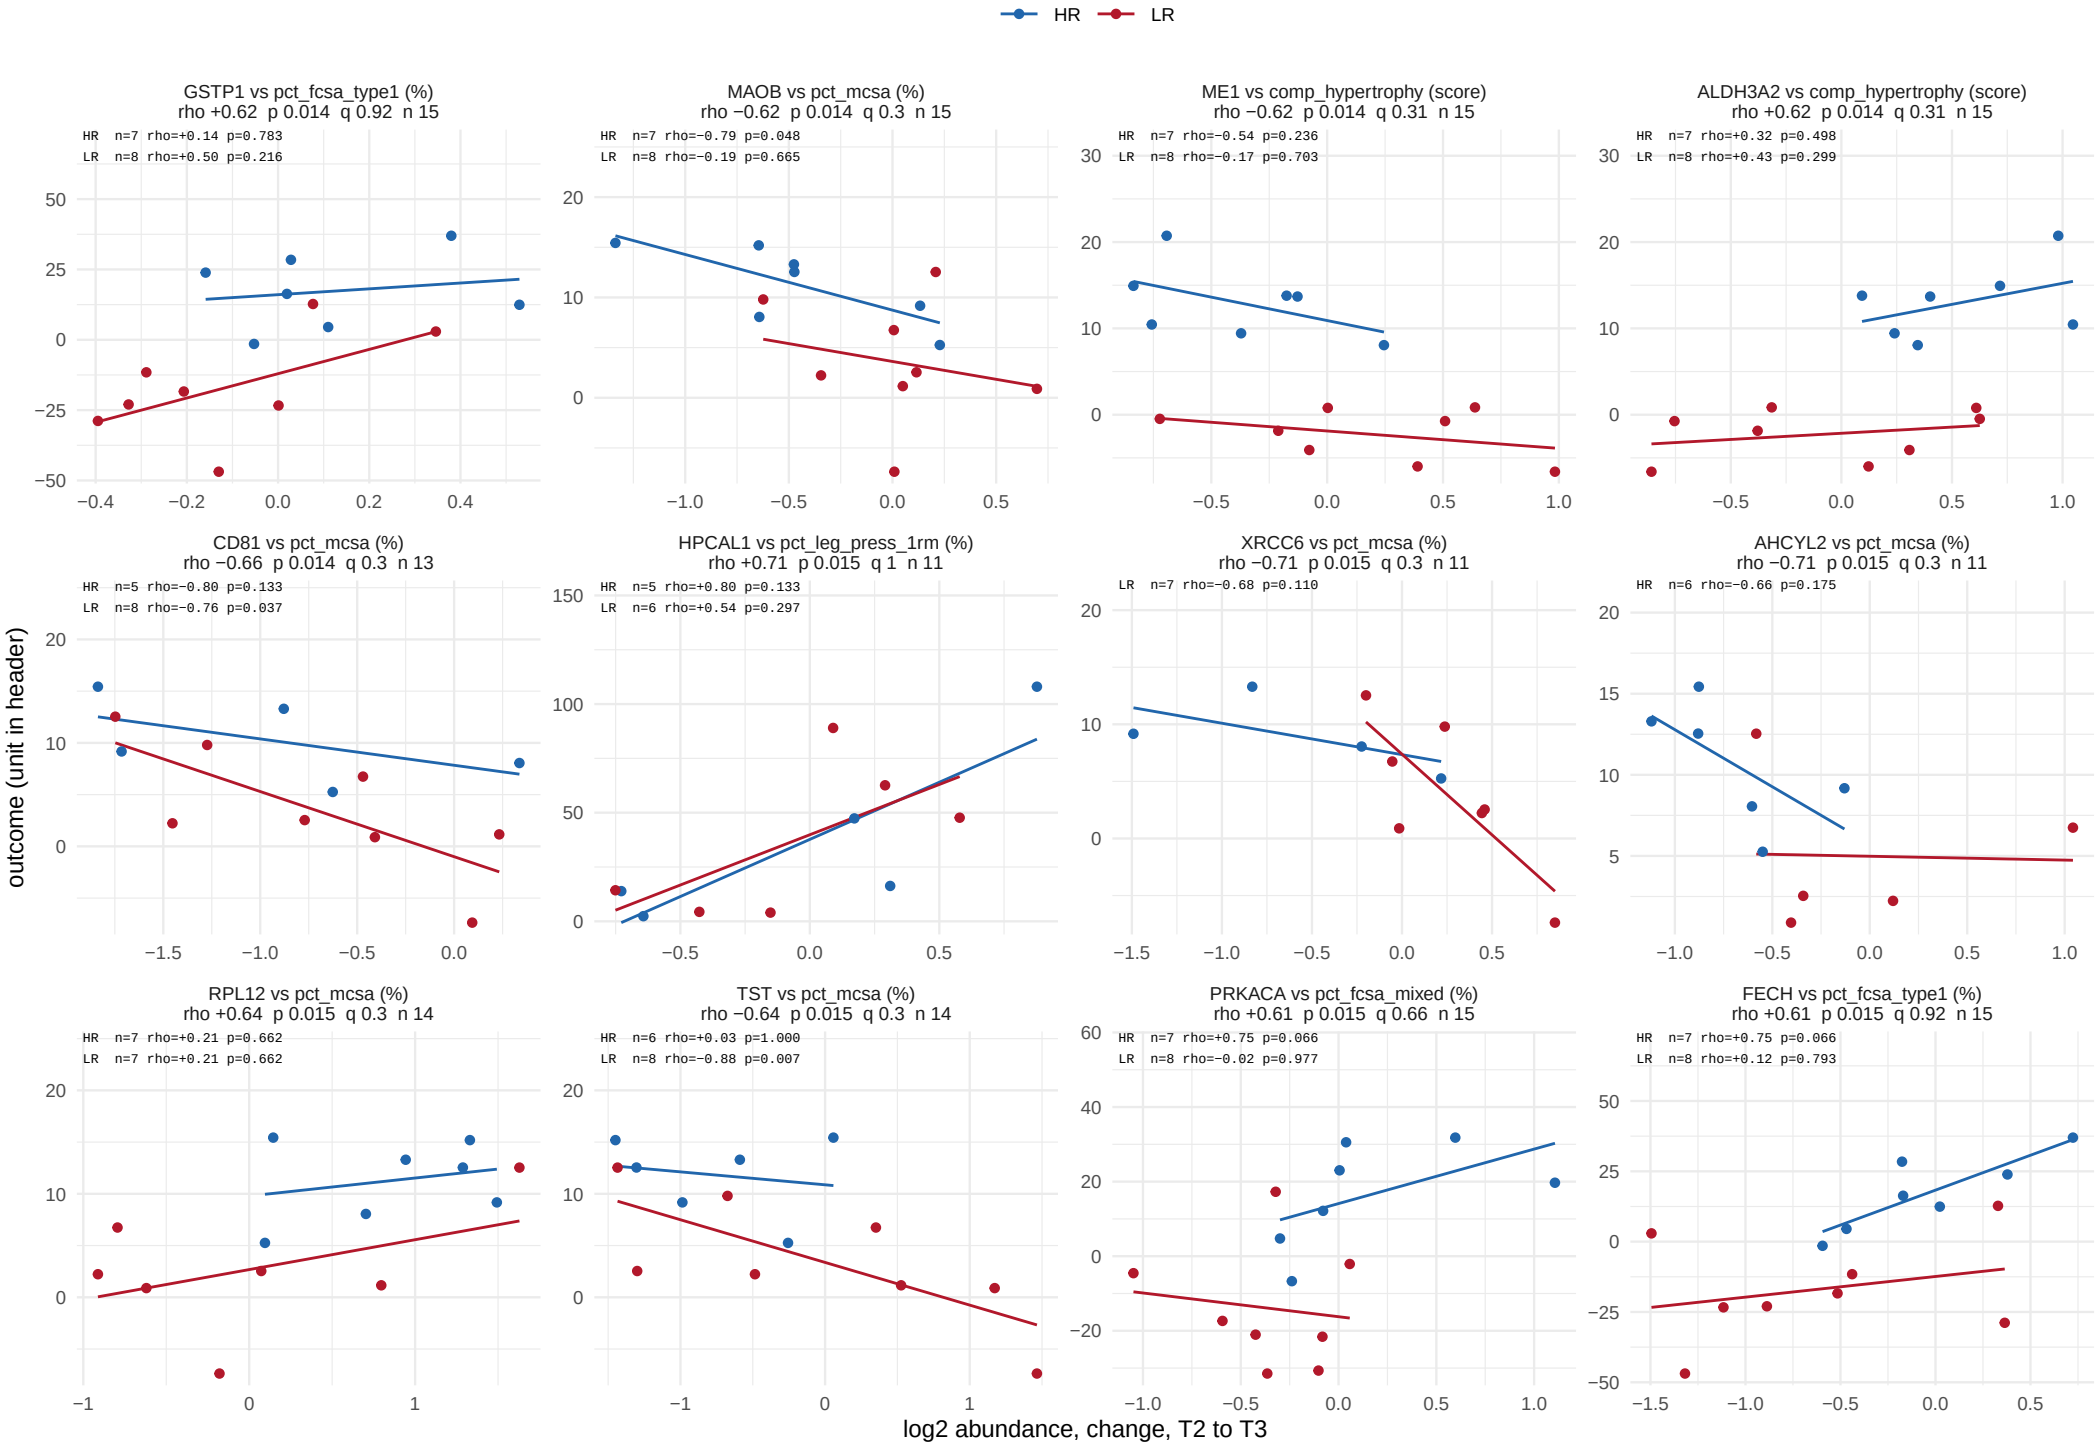

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


741 of 11747 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 23 of 62.

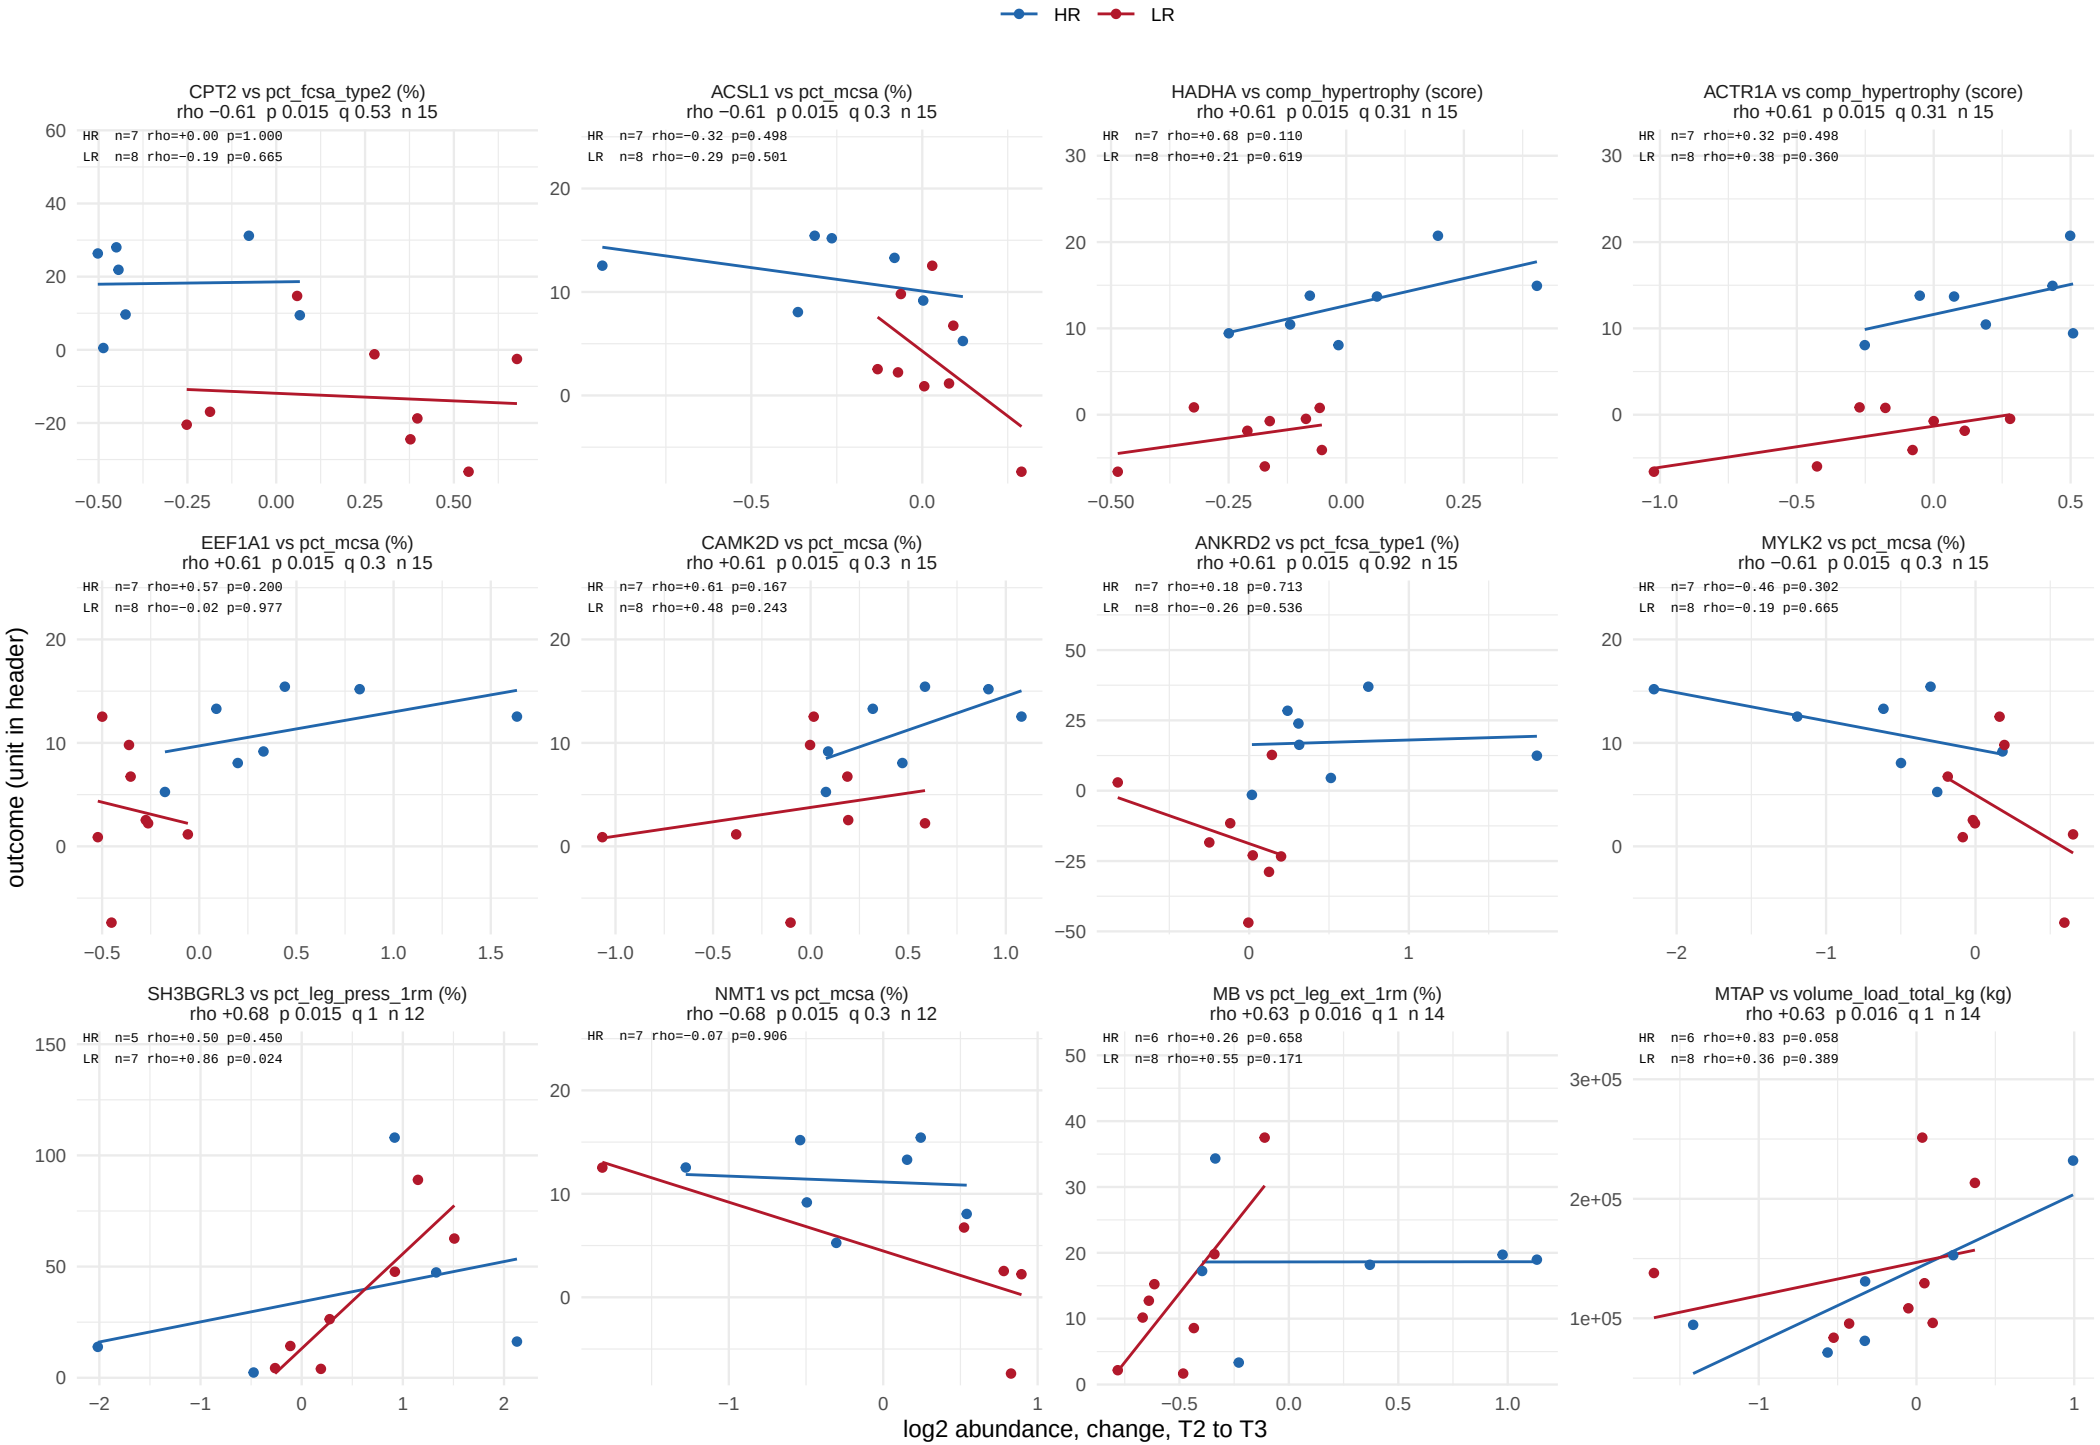

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


741 of 11747 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 24 of 62.

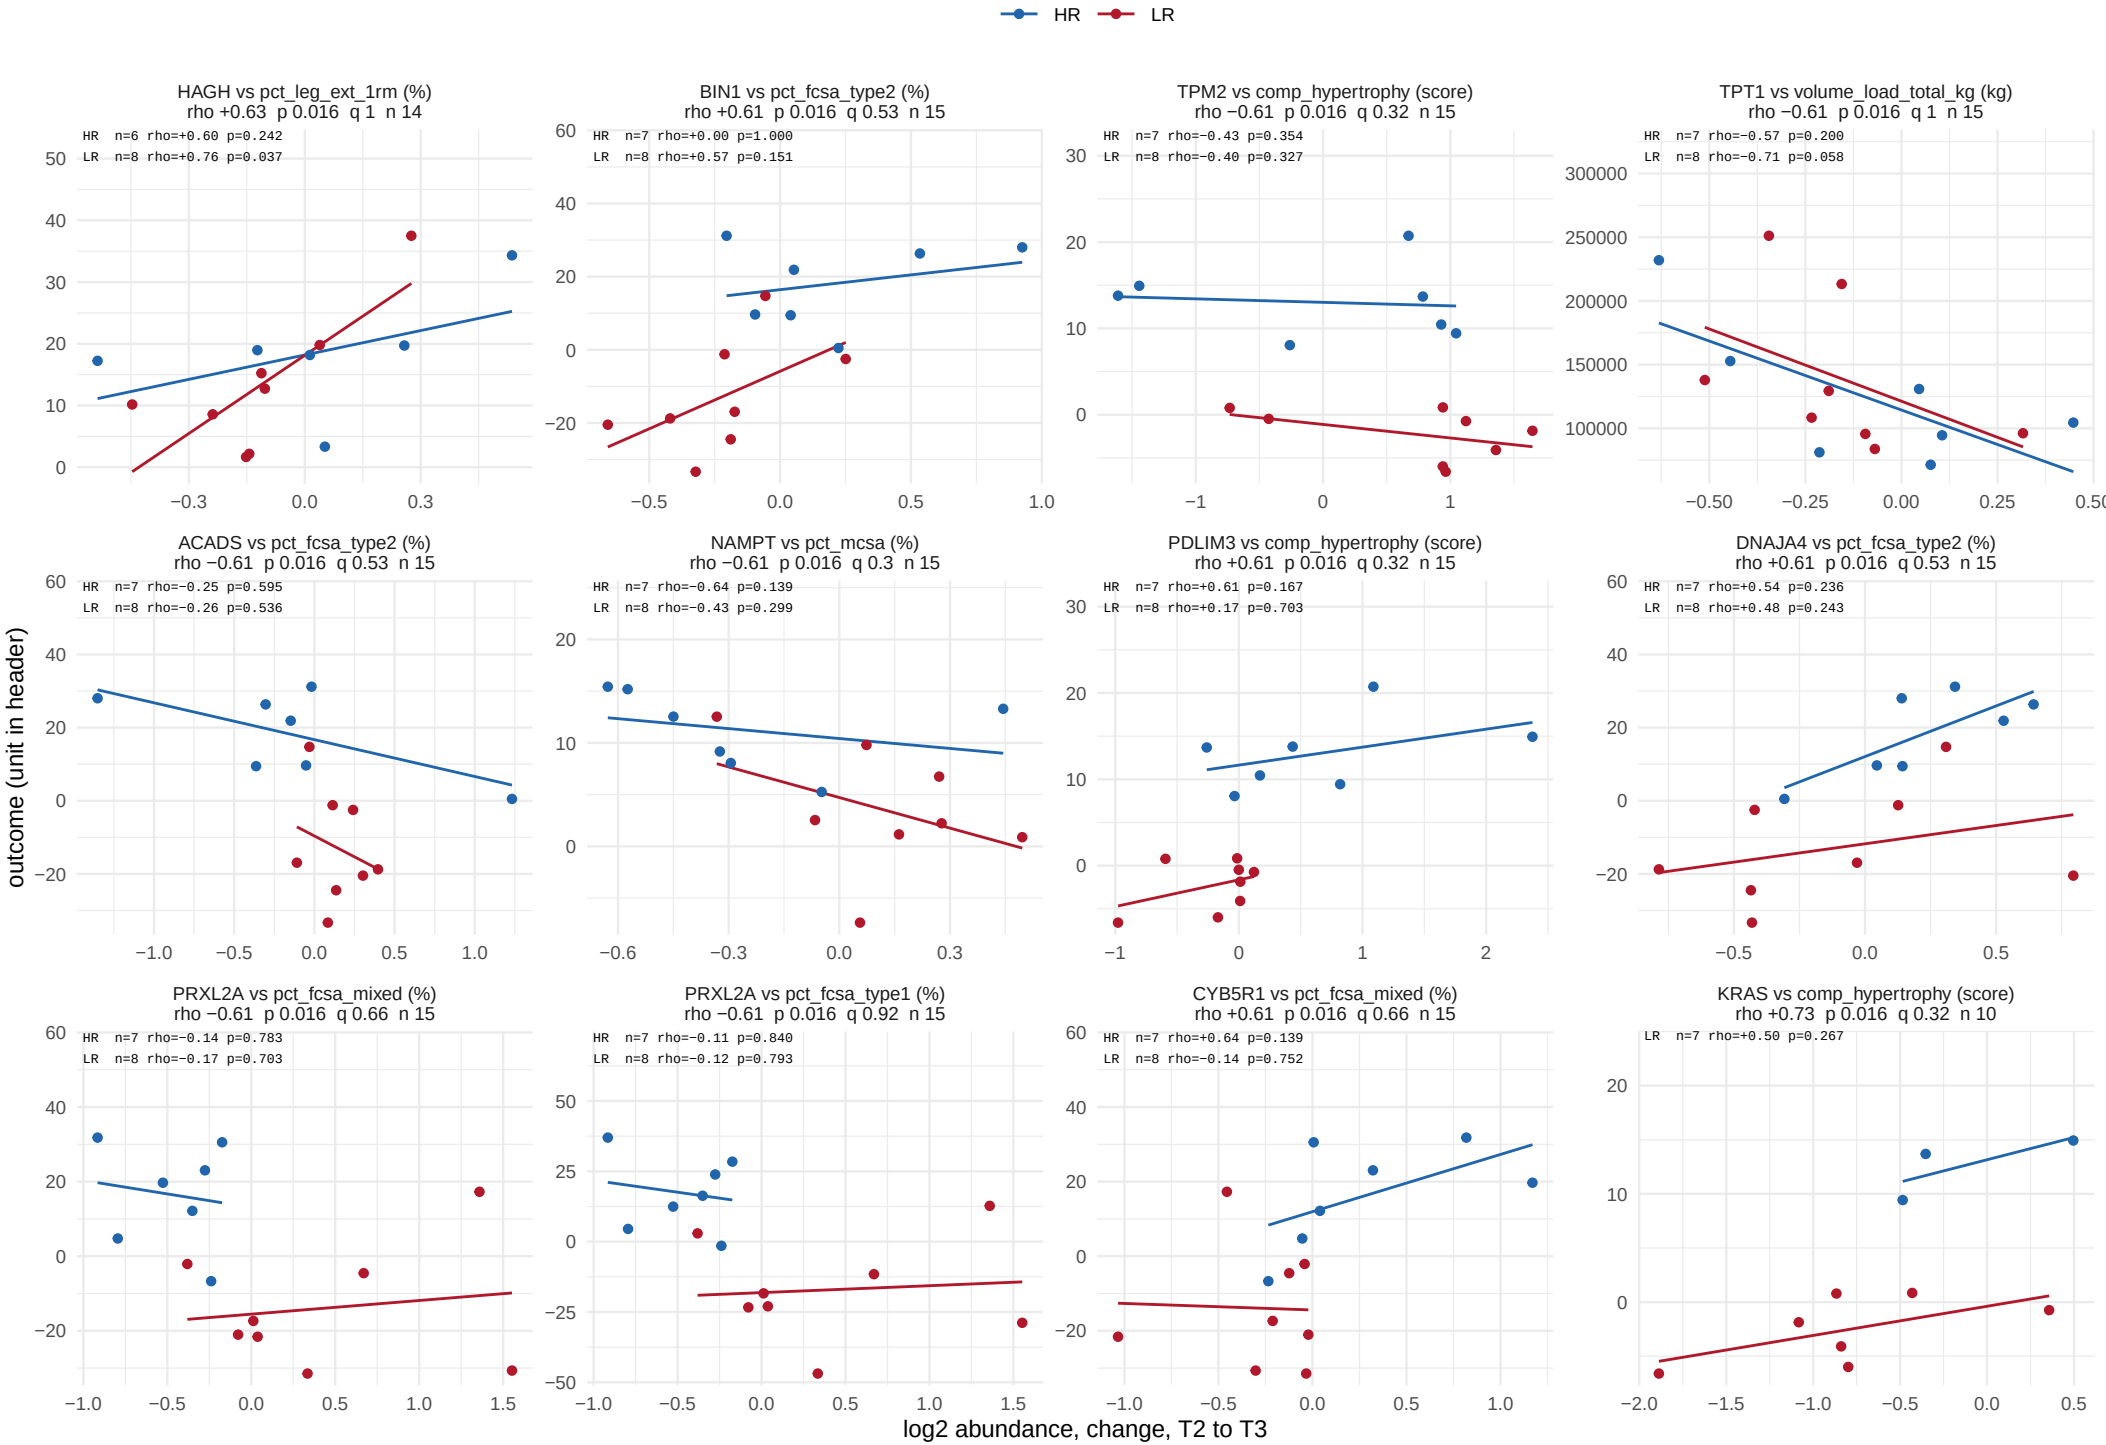

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


741 of 11747 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 25 of 62.

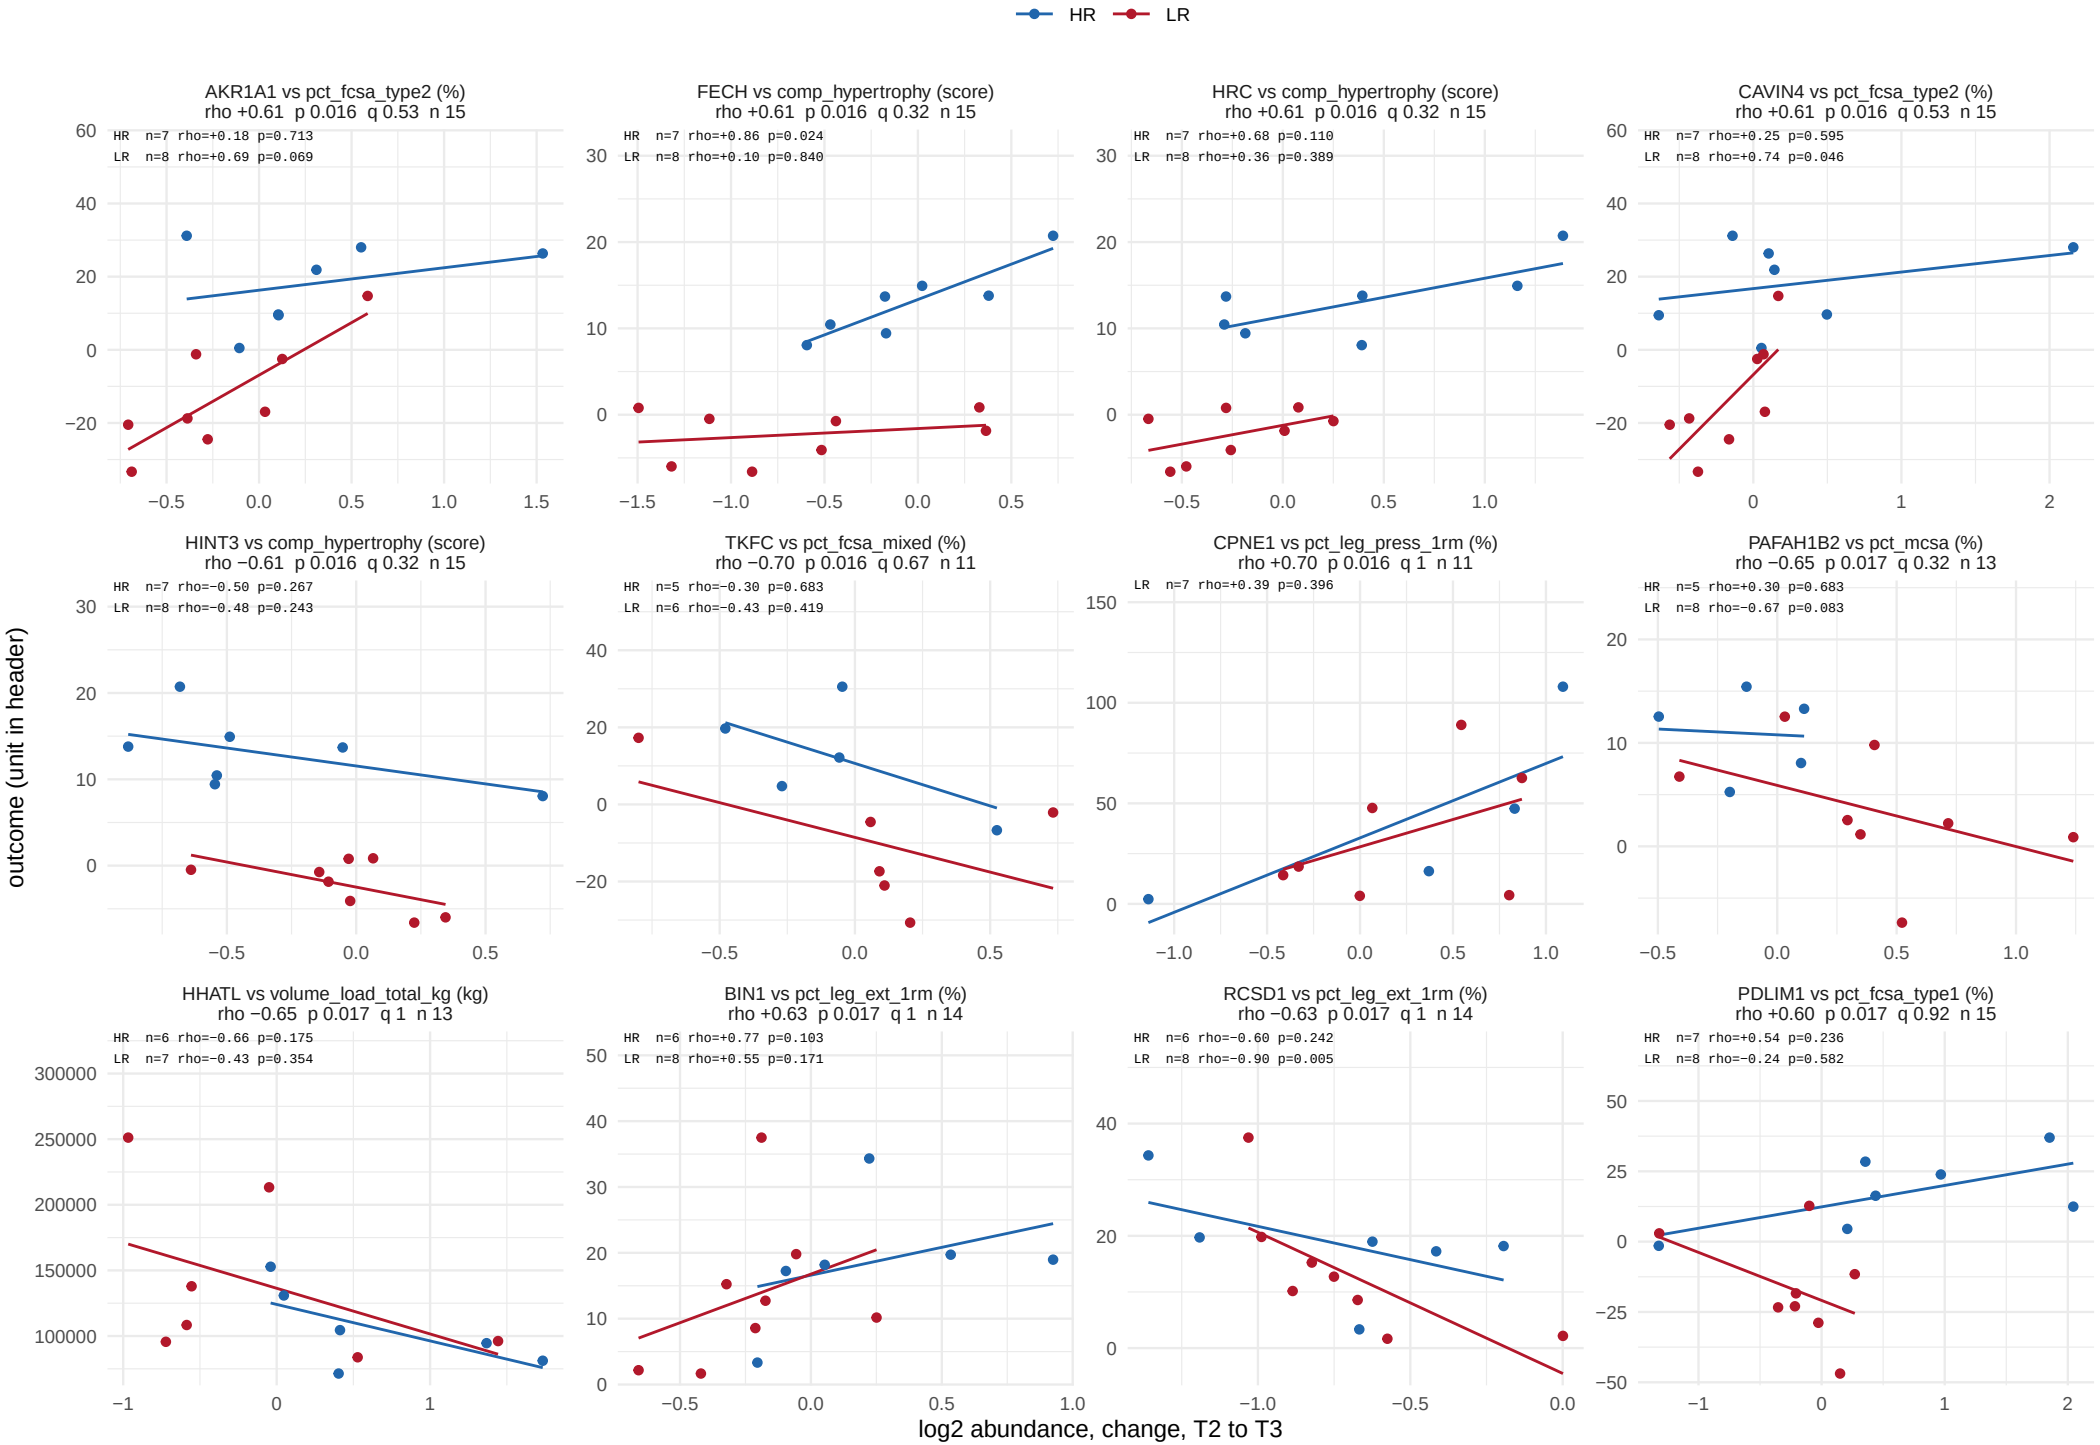

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


741 of 11747 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 26 of 62.

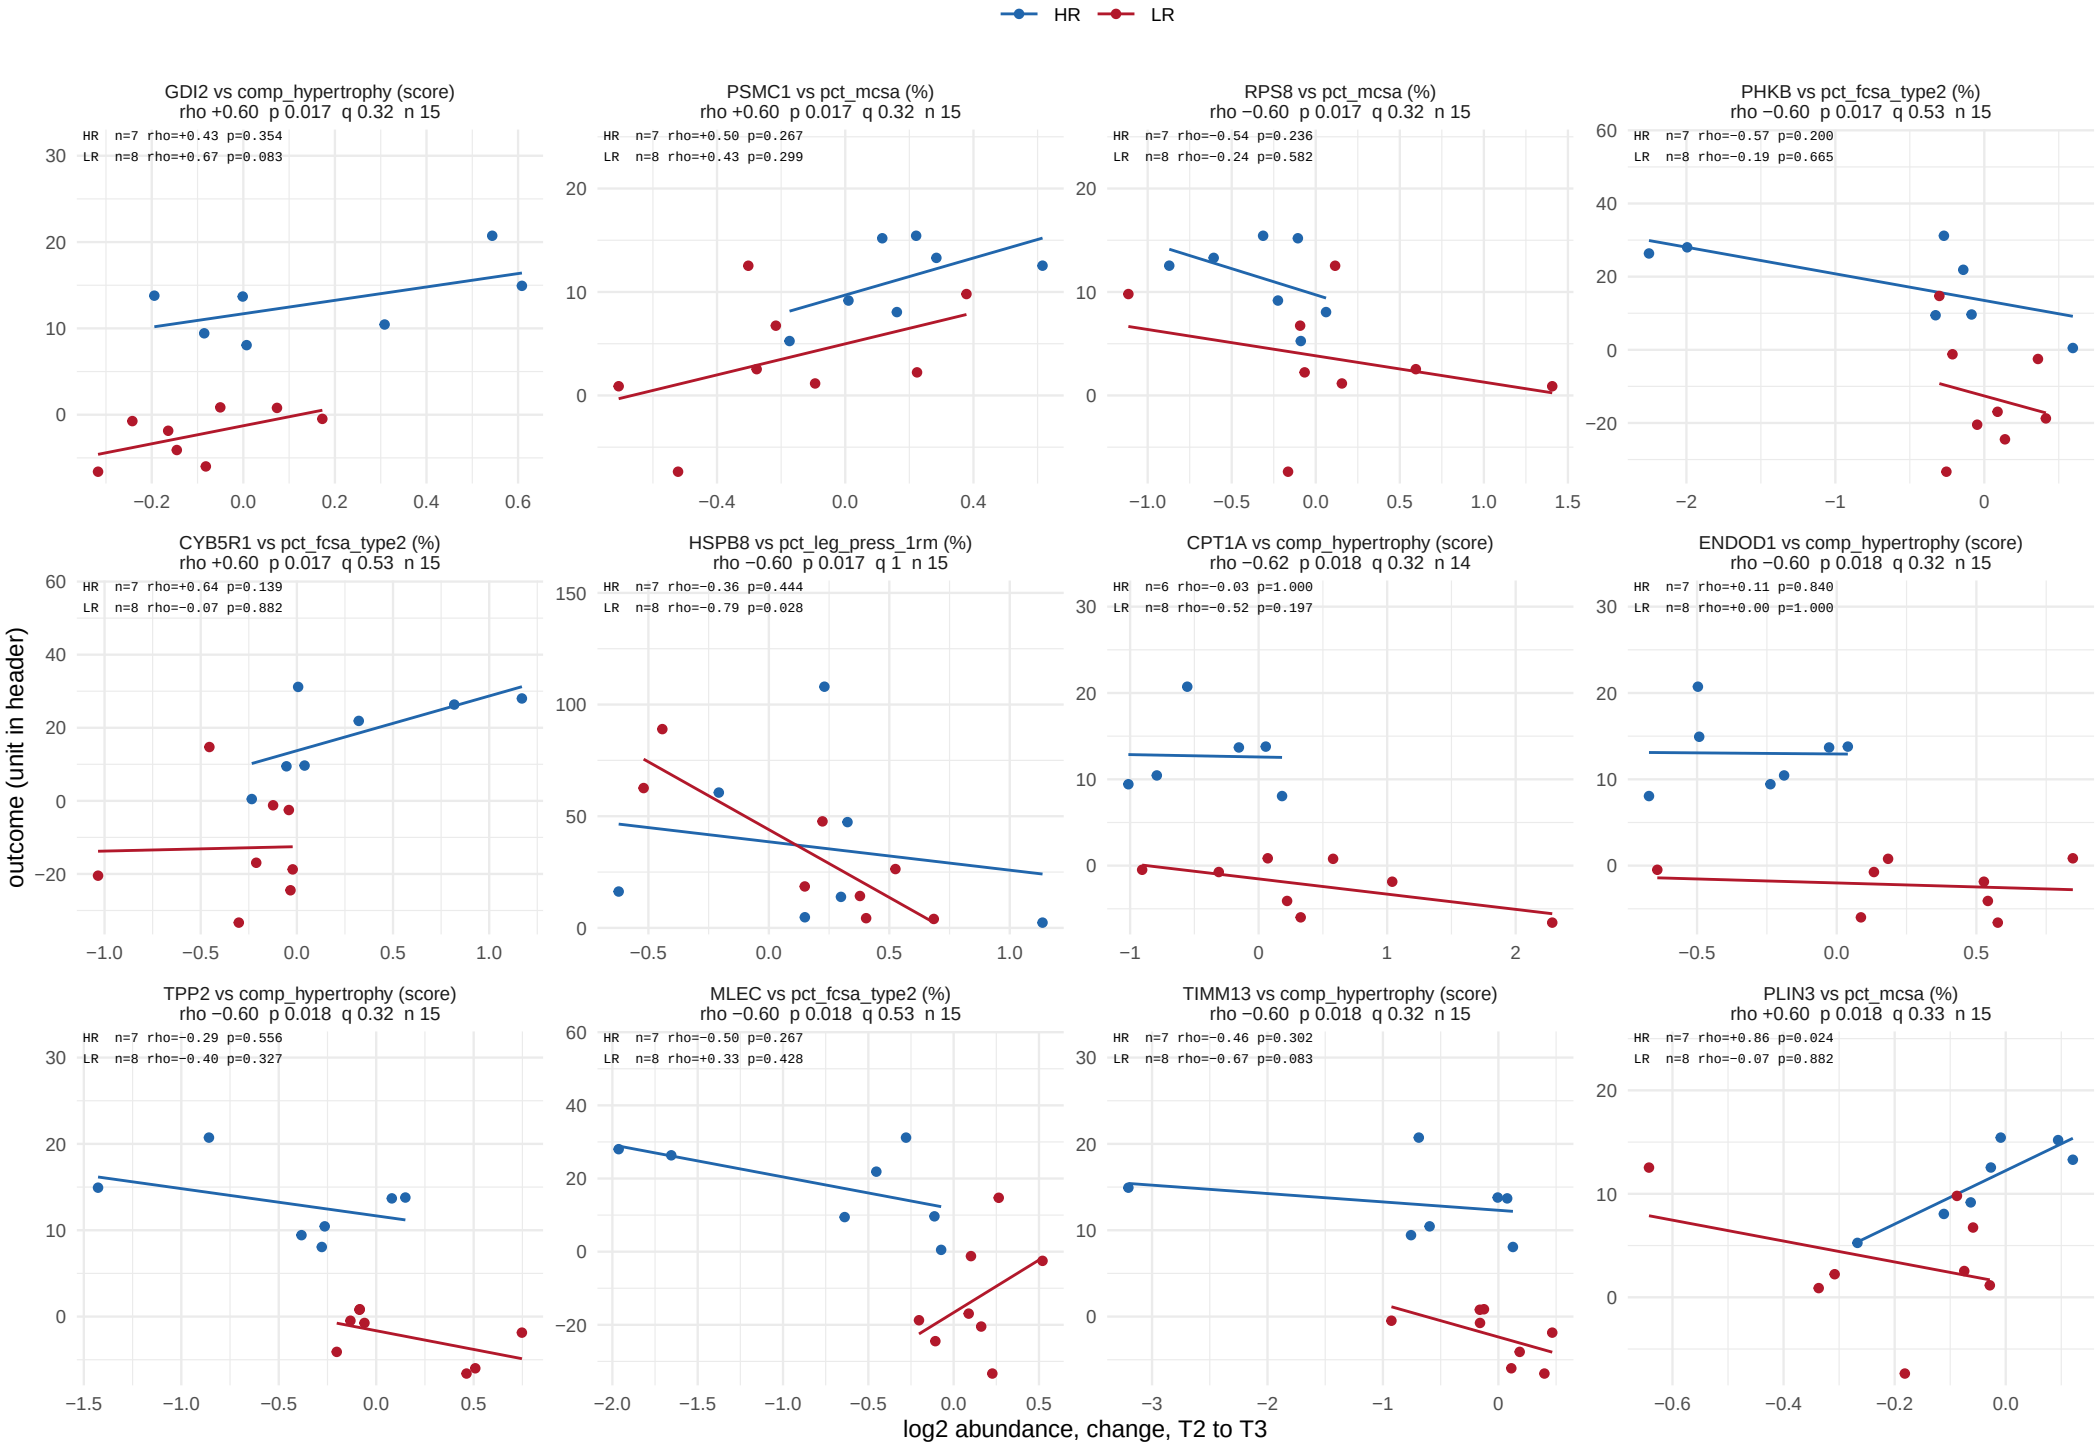

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


741 of 11747 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 27 of 62.

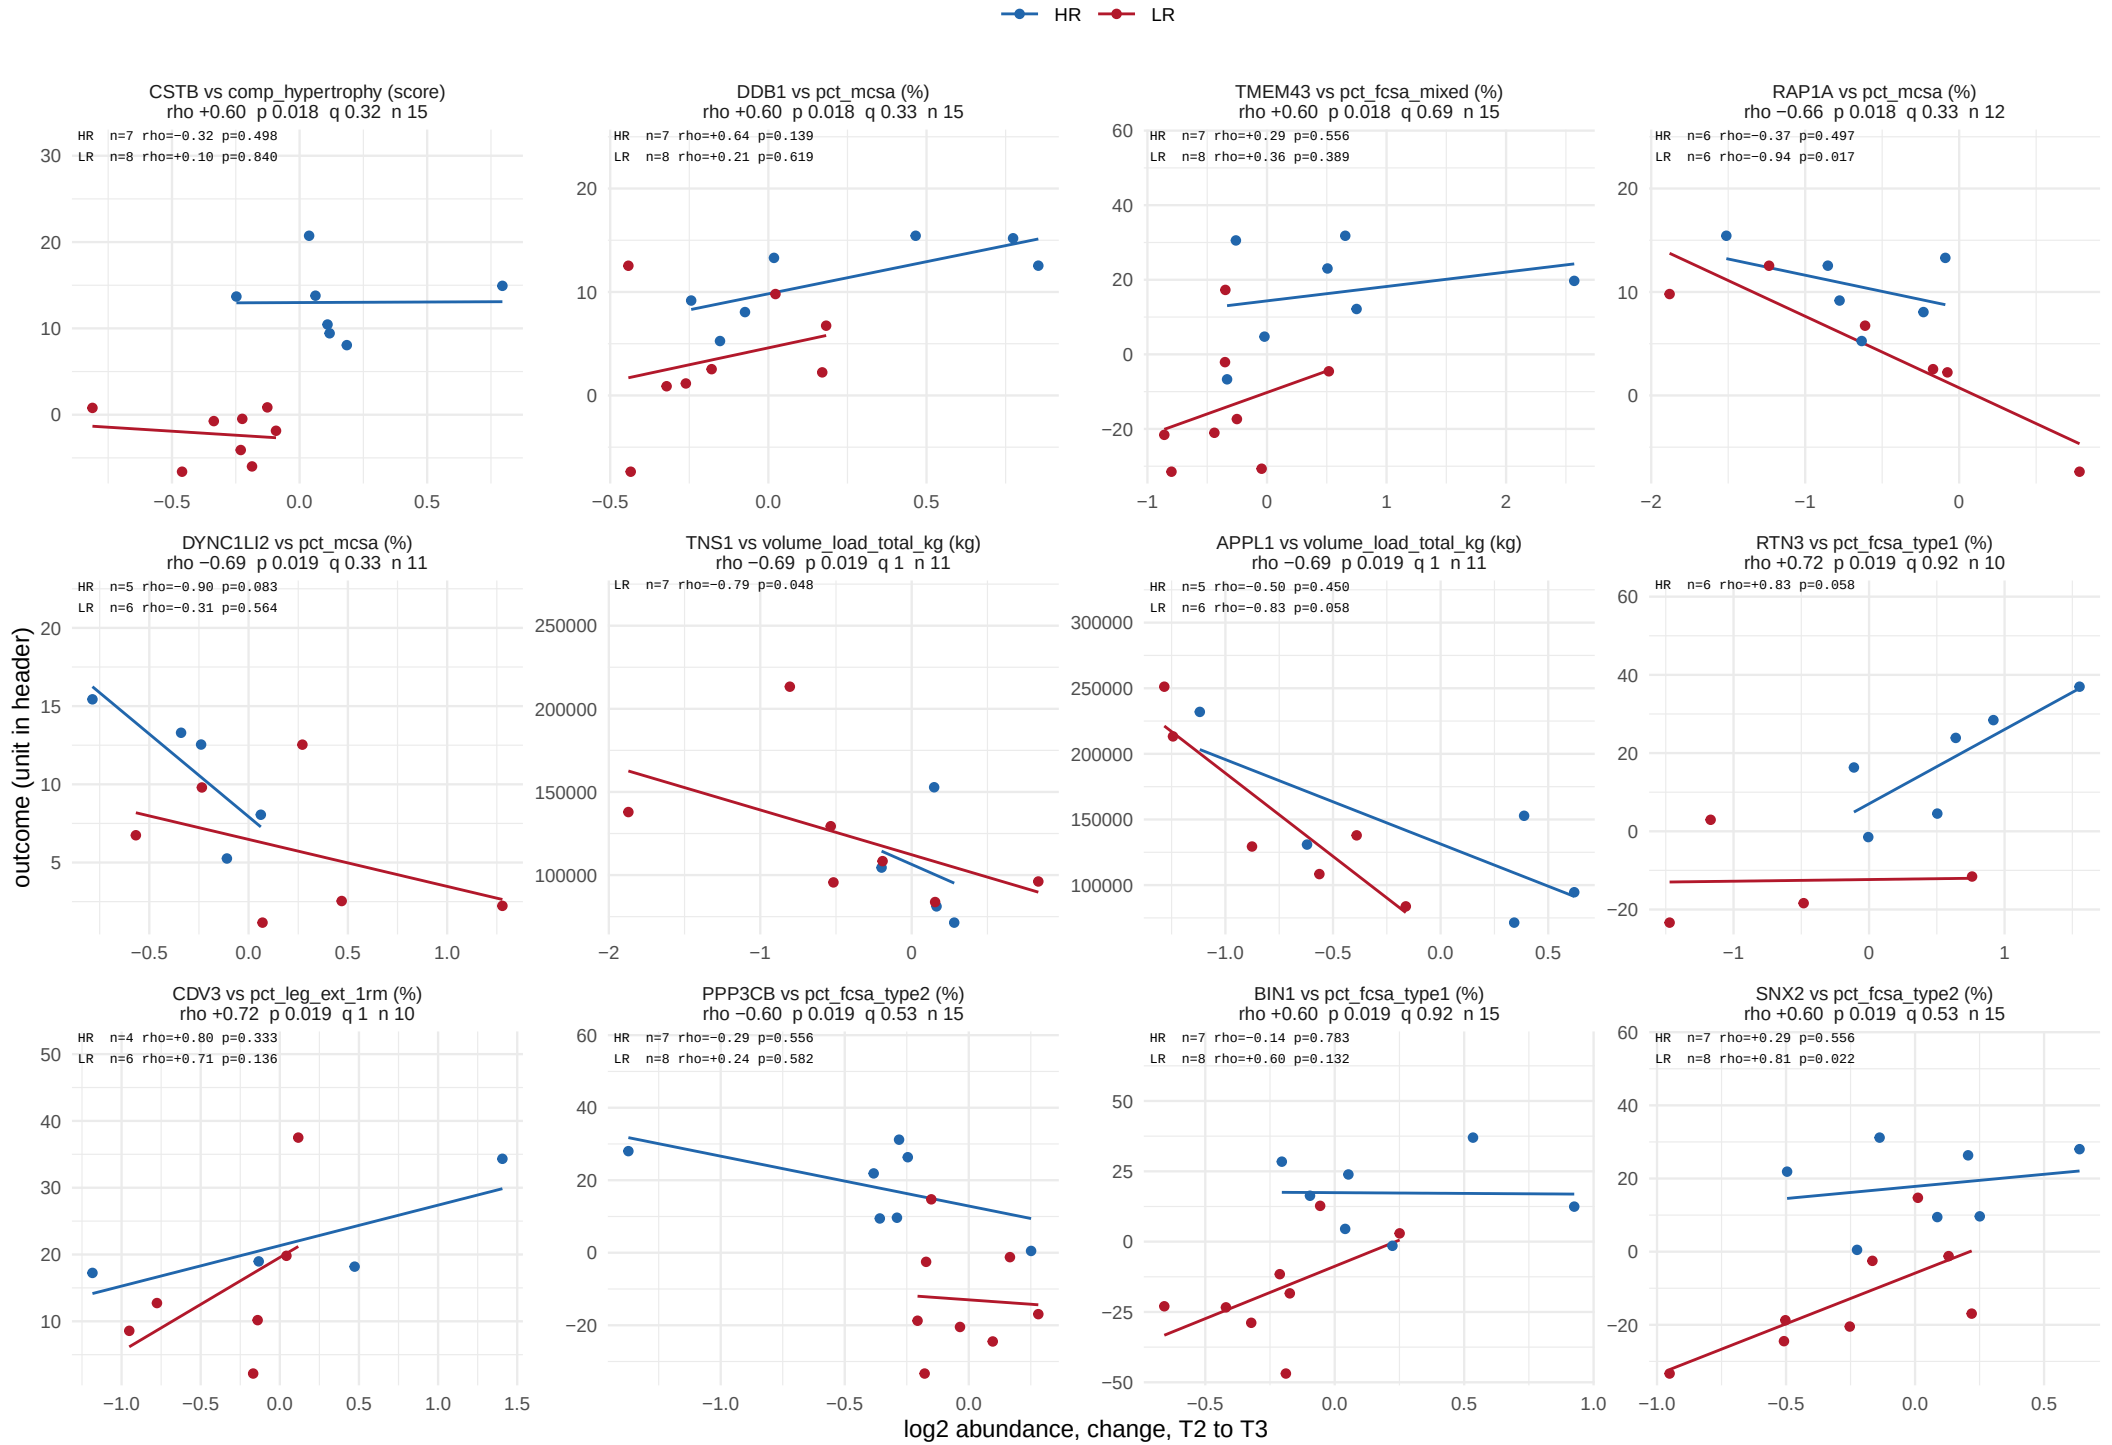

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


741 of 11747 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 28 of 62.

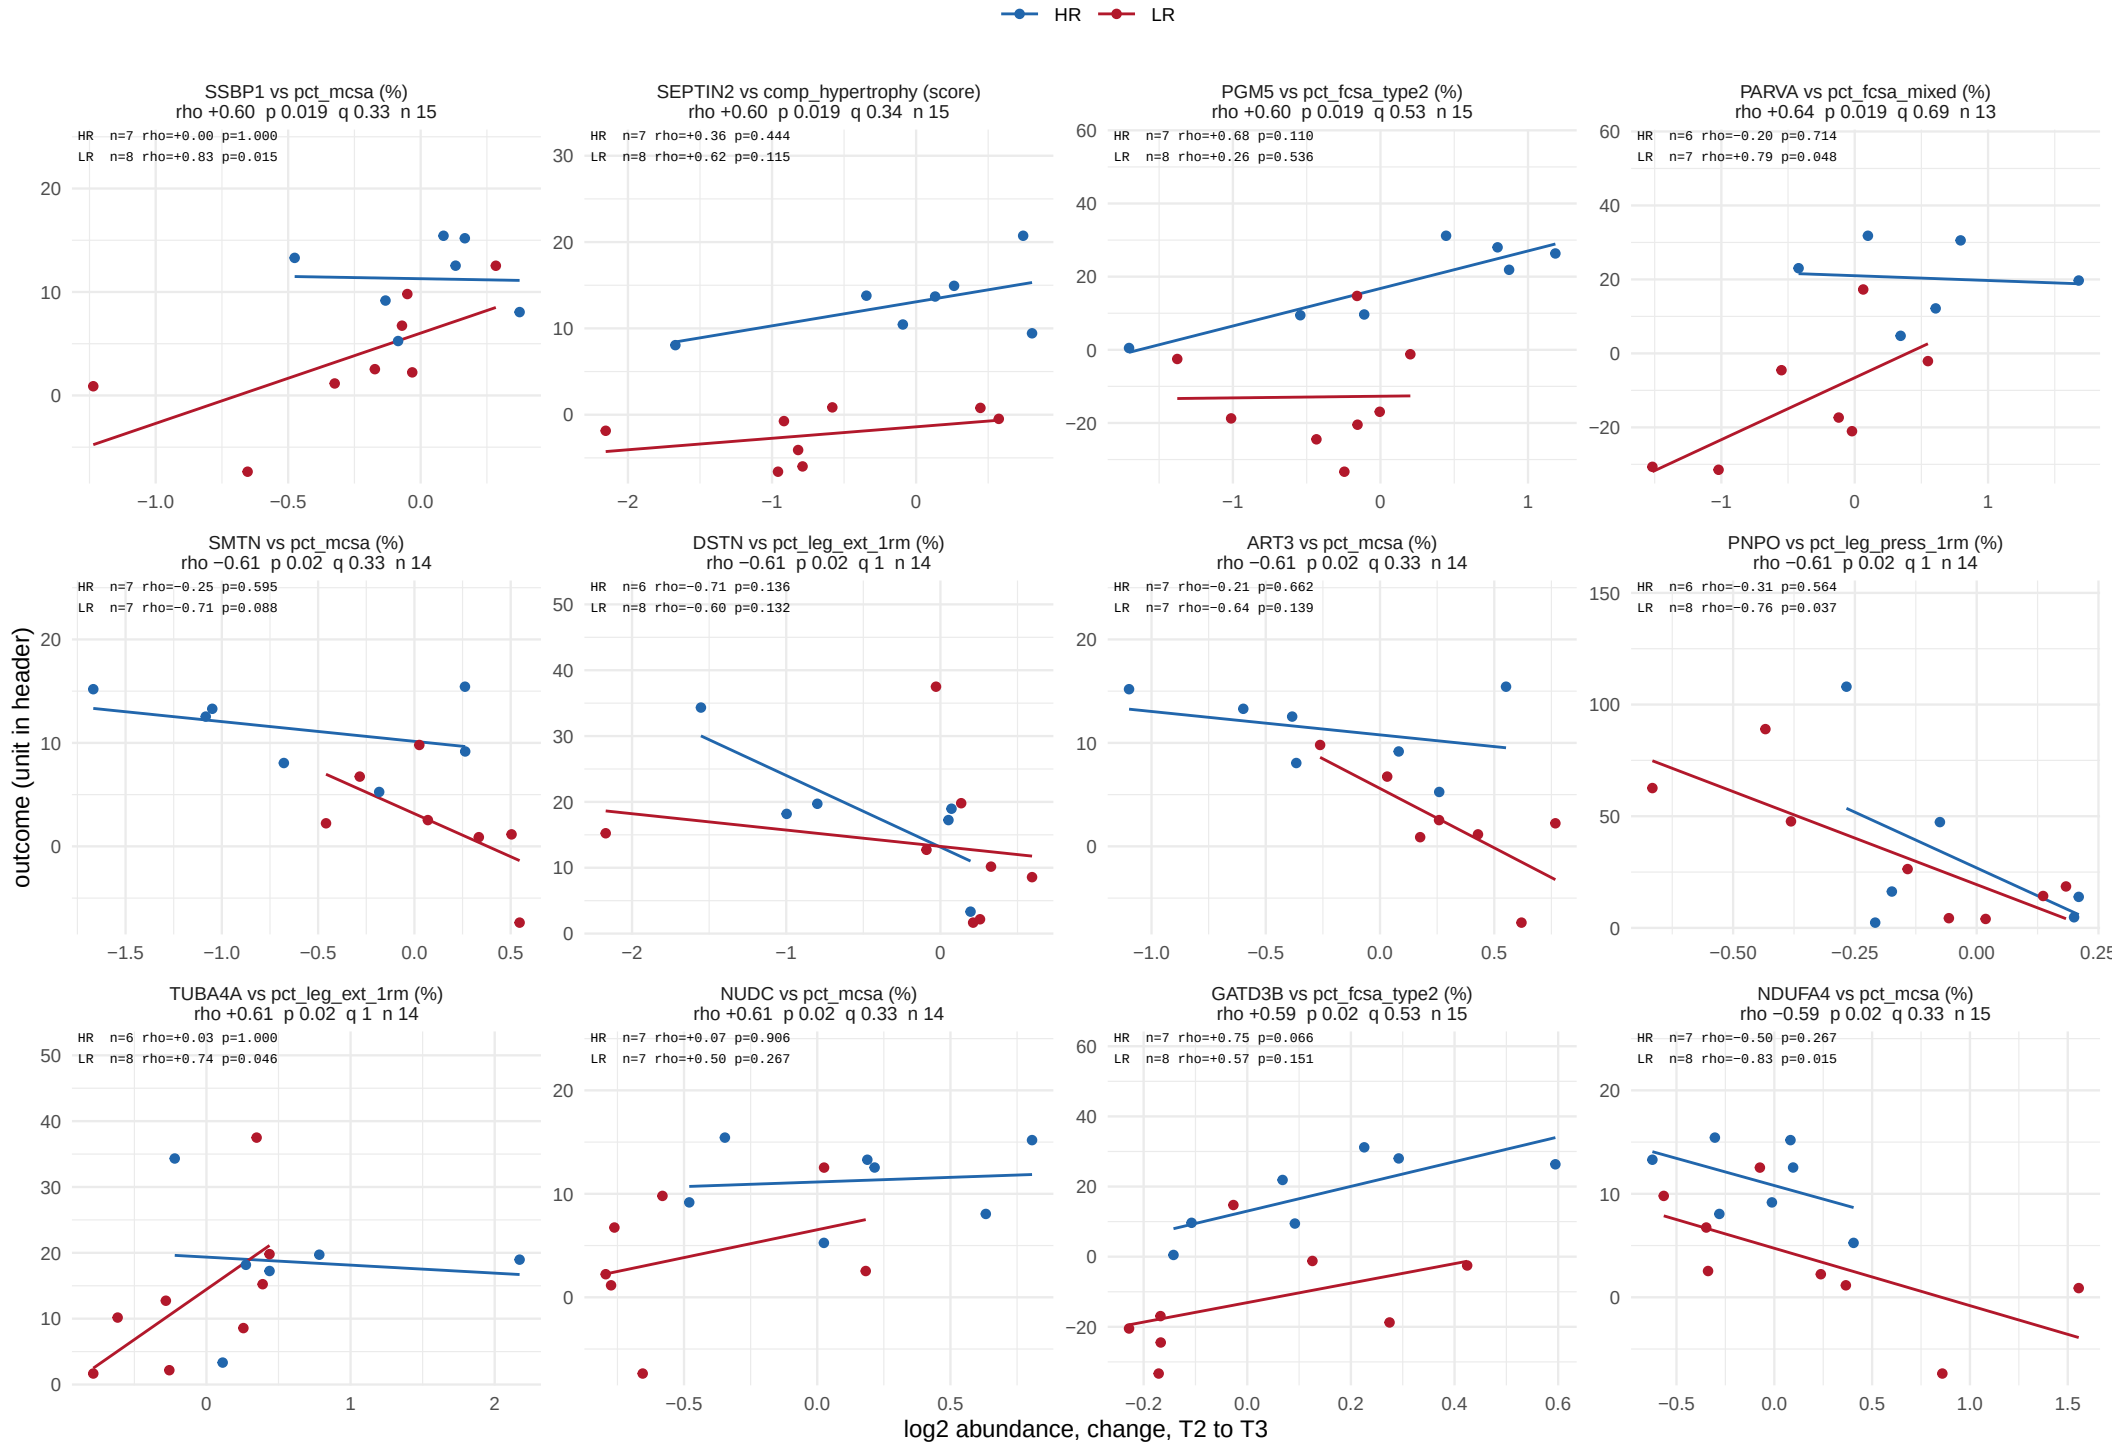

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window

741 of 11747 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 29 of 62.

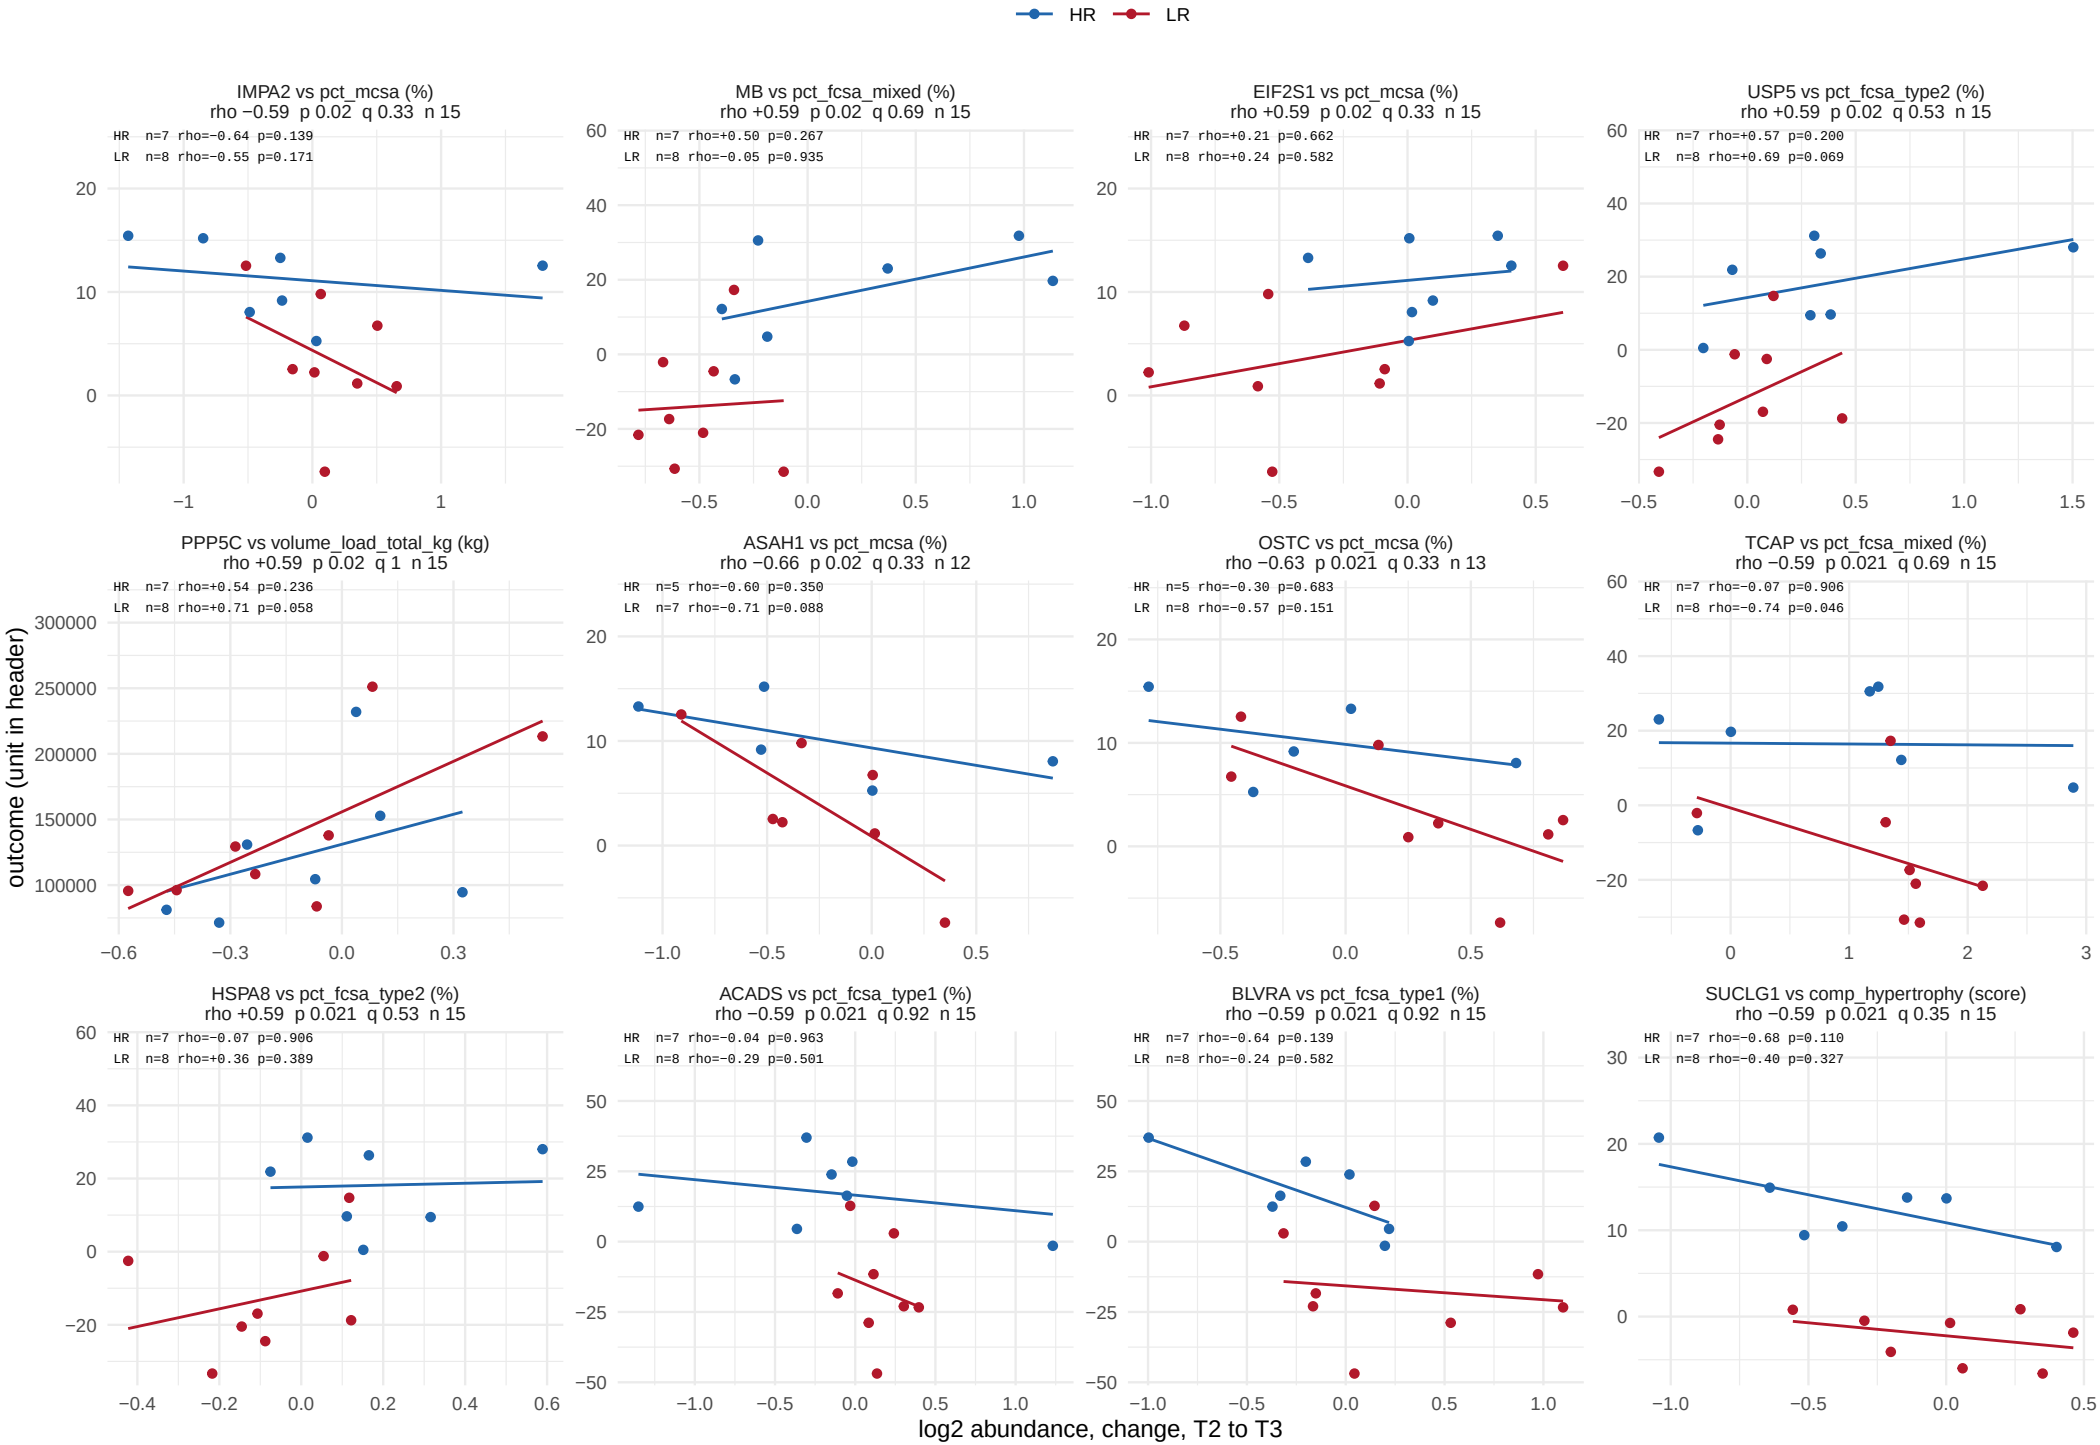

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


741 of 11747 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 30 of 62.



One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


741 of 11747 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 31 of 62.

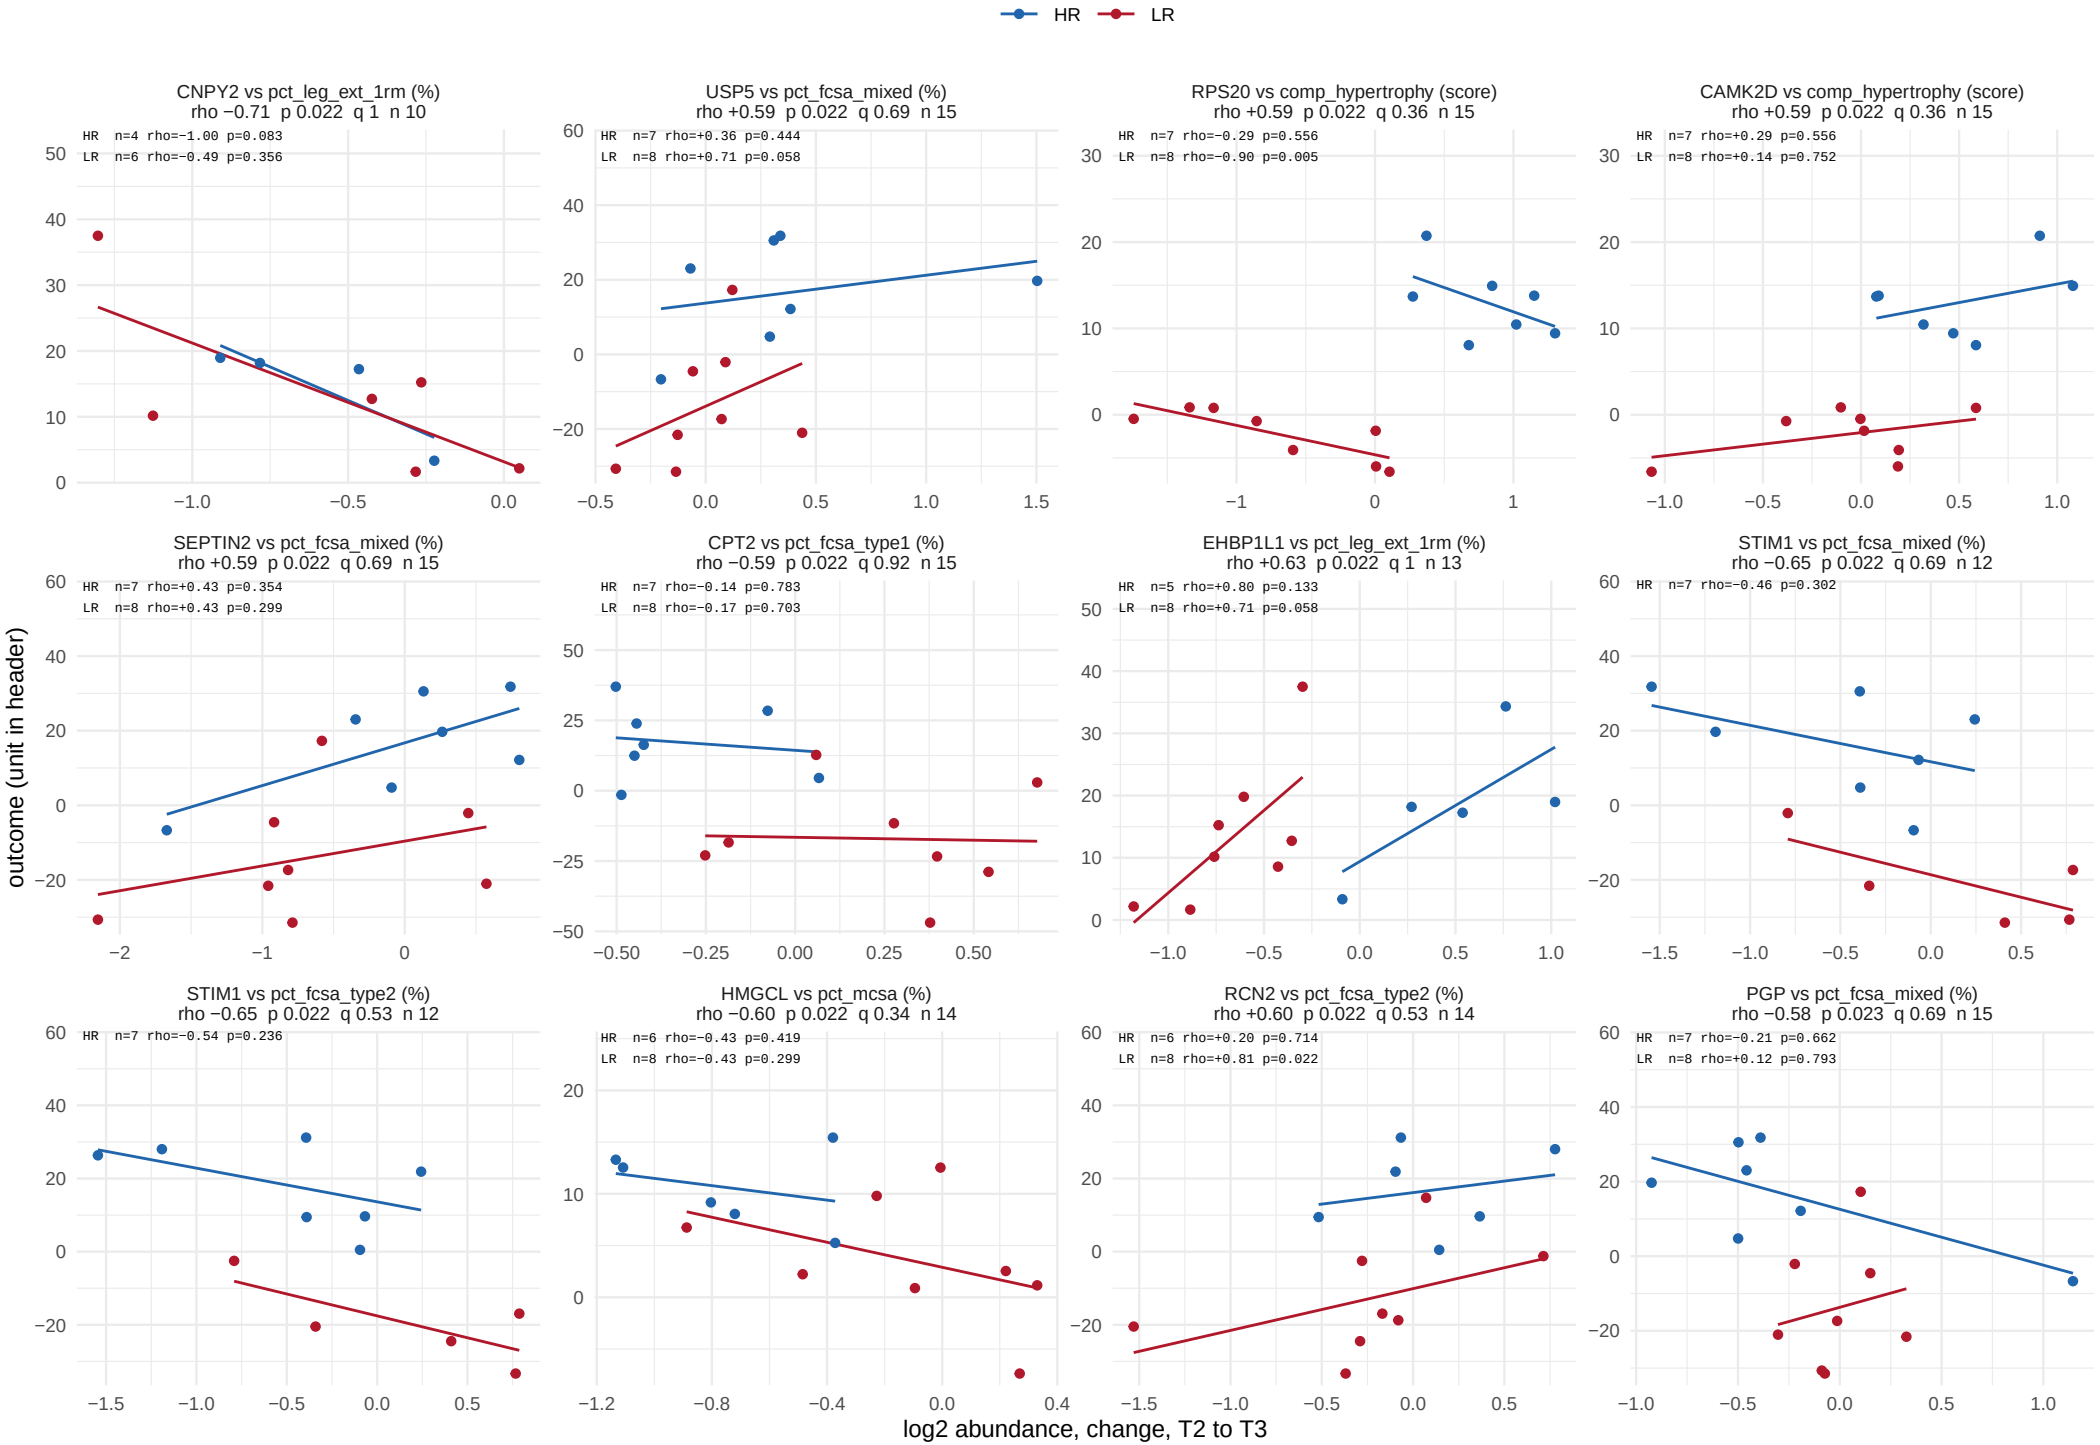

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


741 of 11747 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 32 of 62.

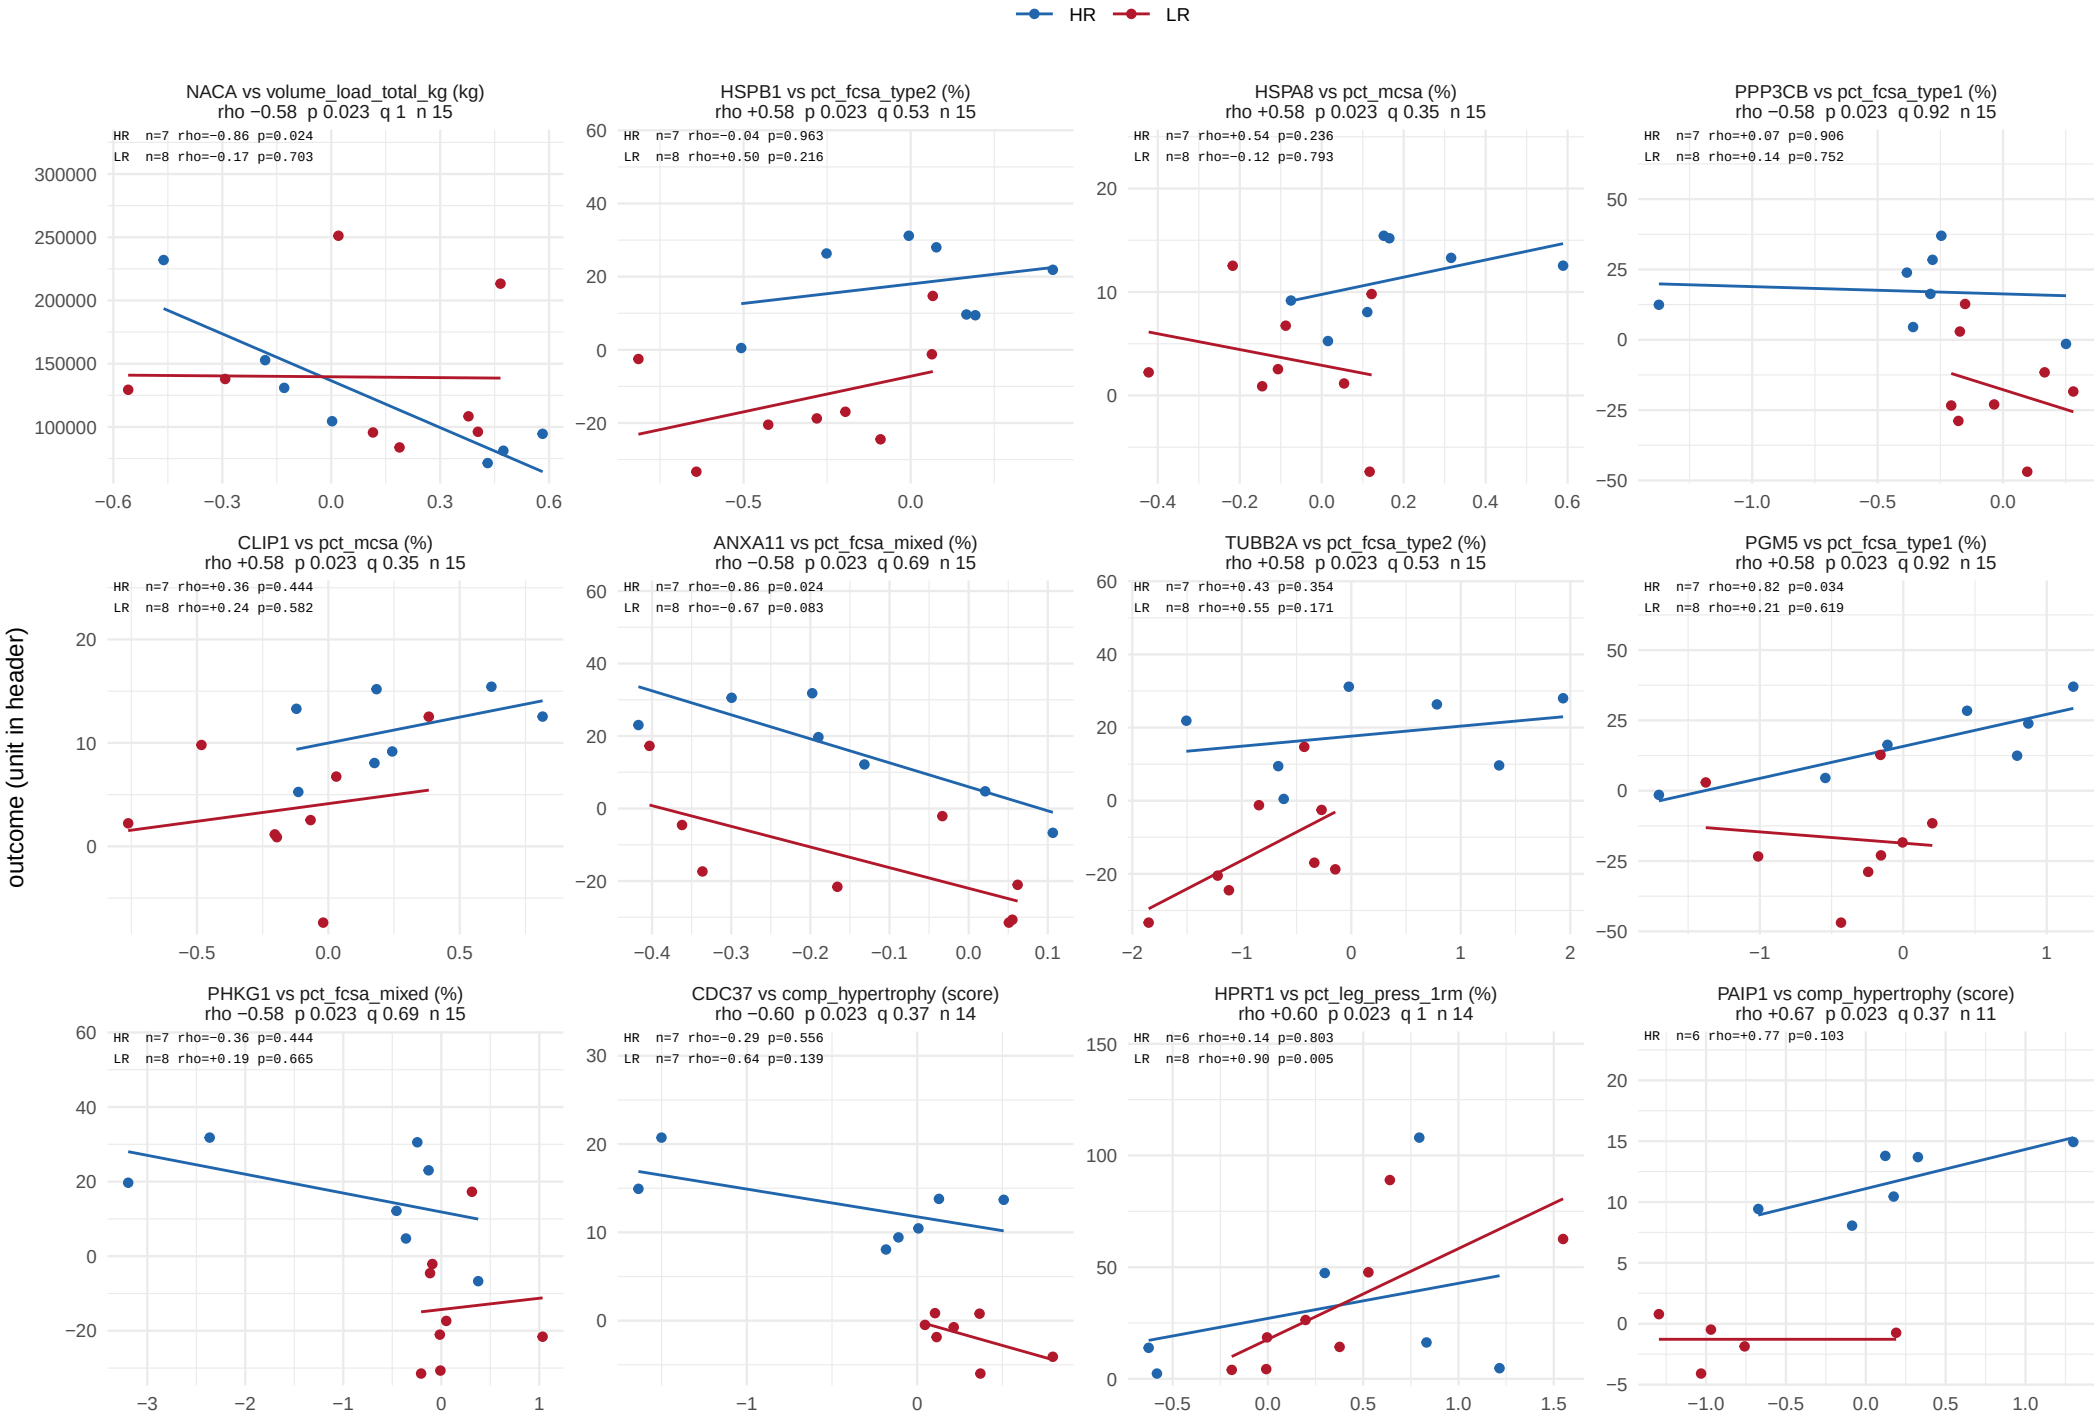

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


741 of 11747 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 33 of 62.

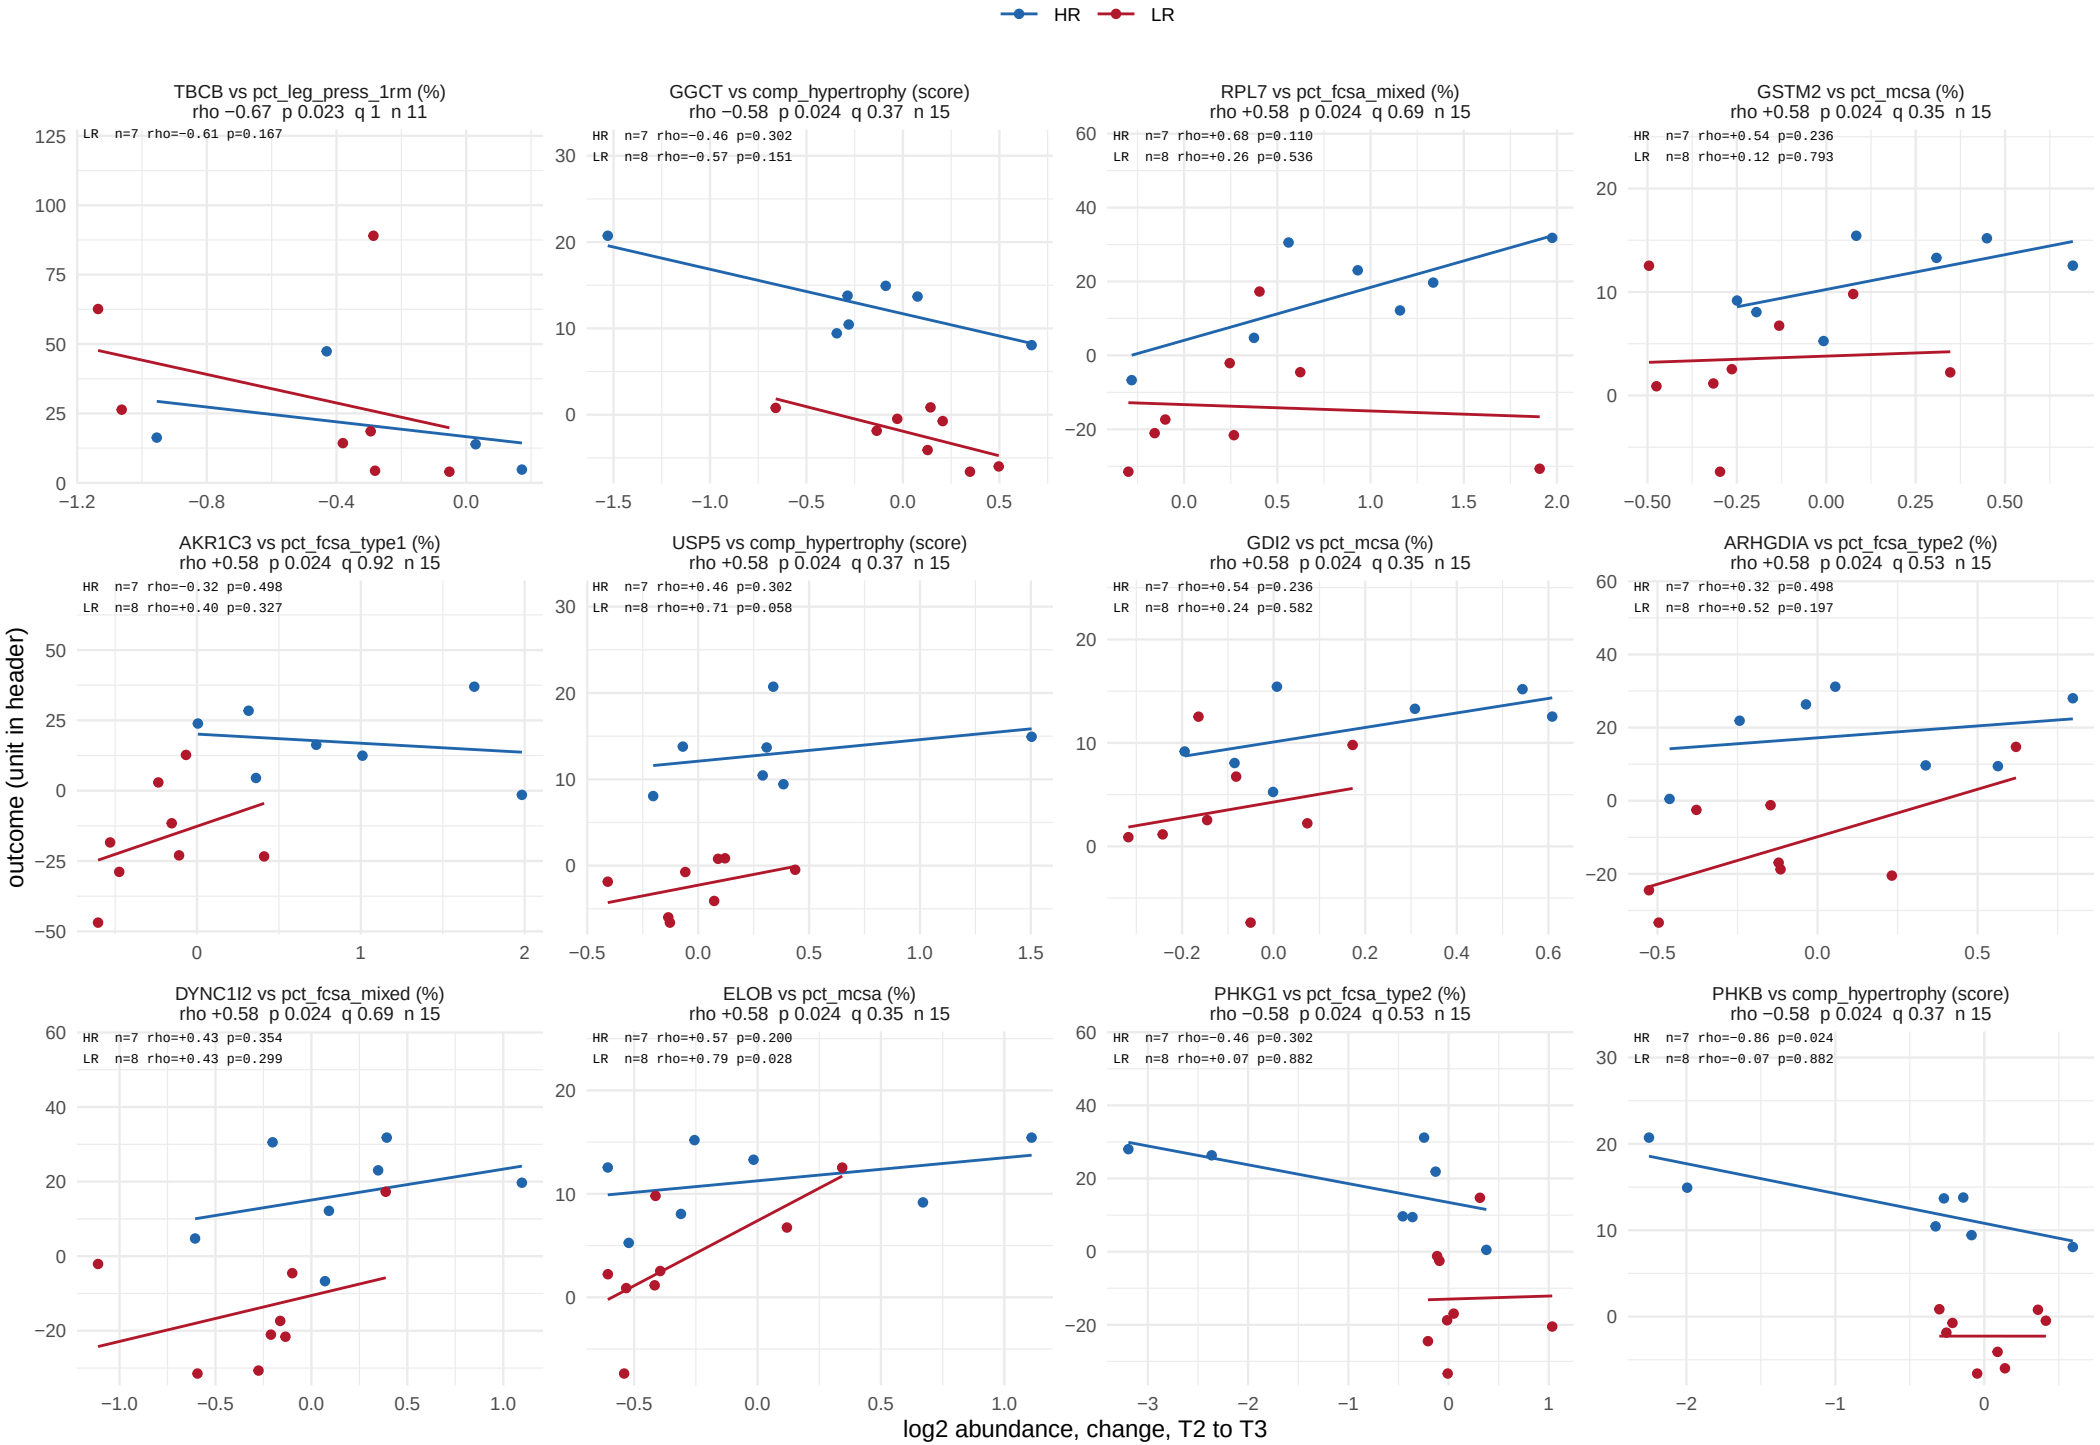

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


741 of 11747 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 34 of 62.

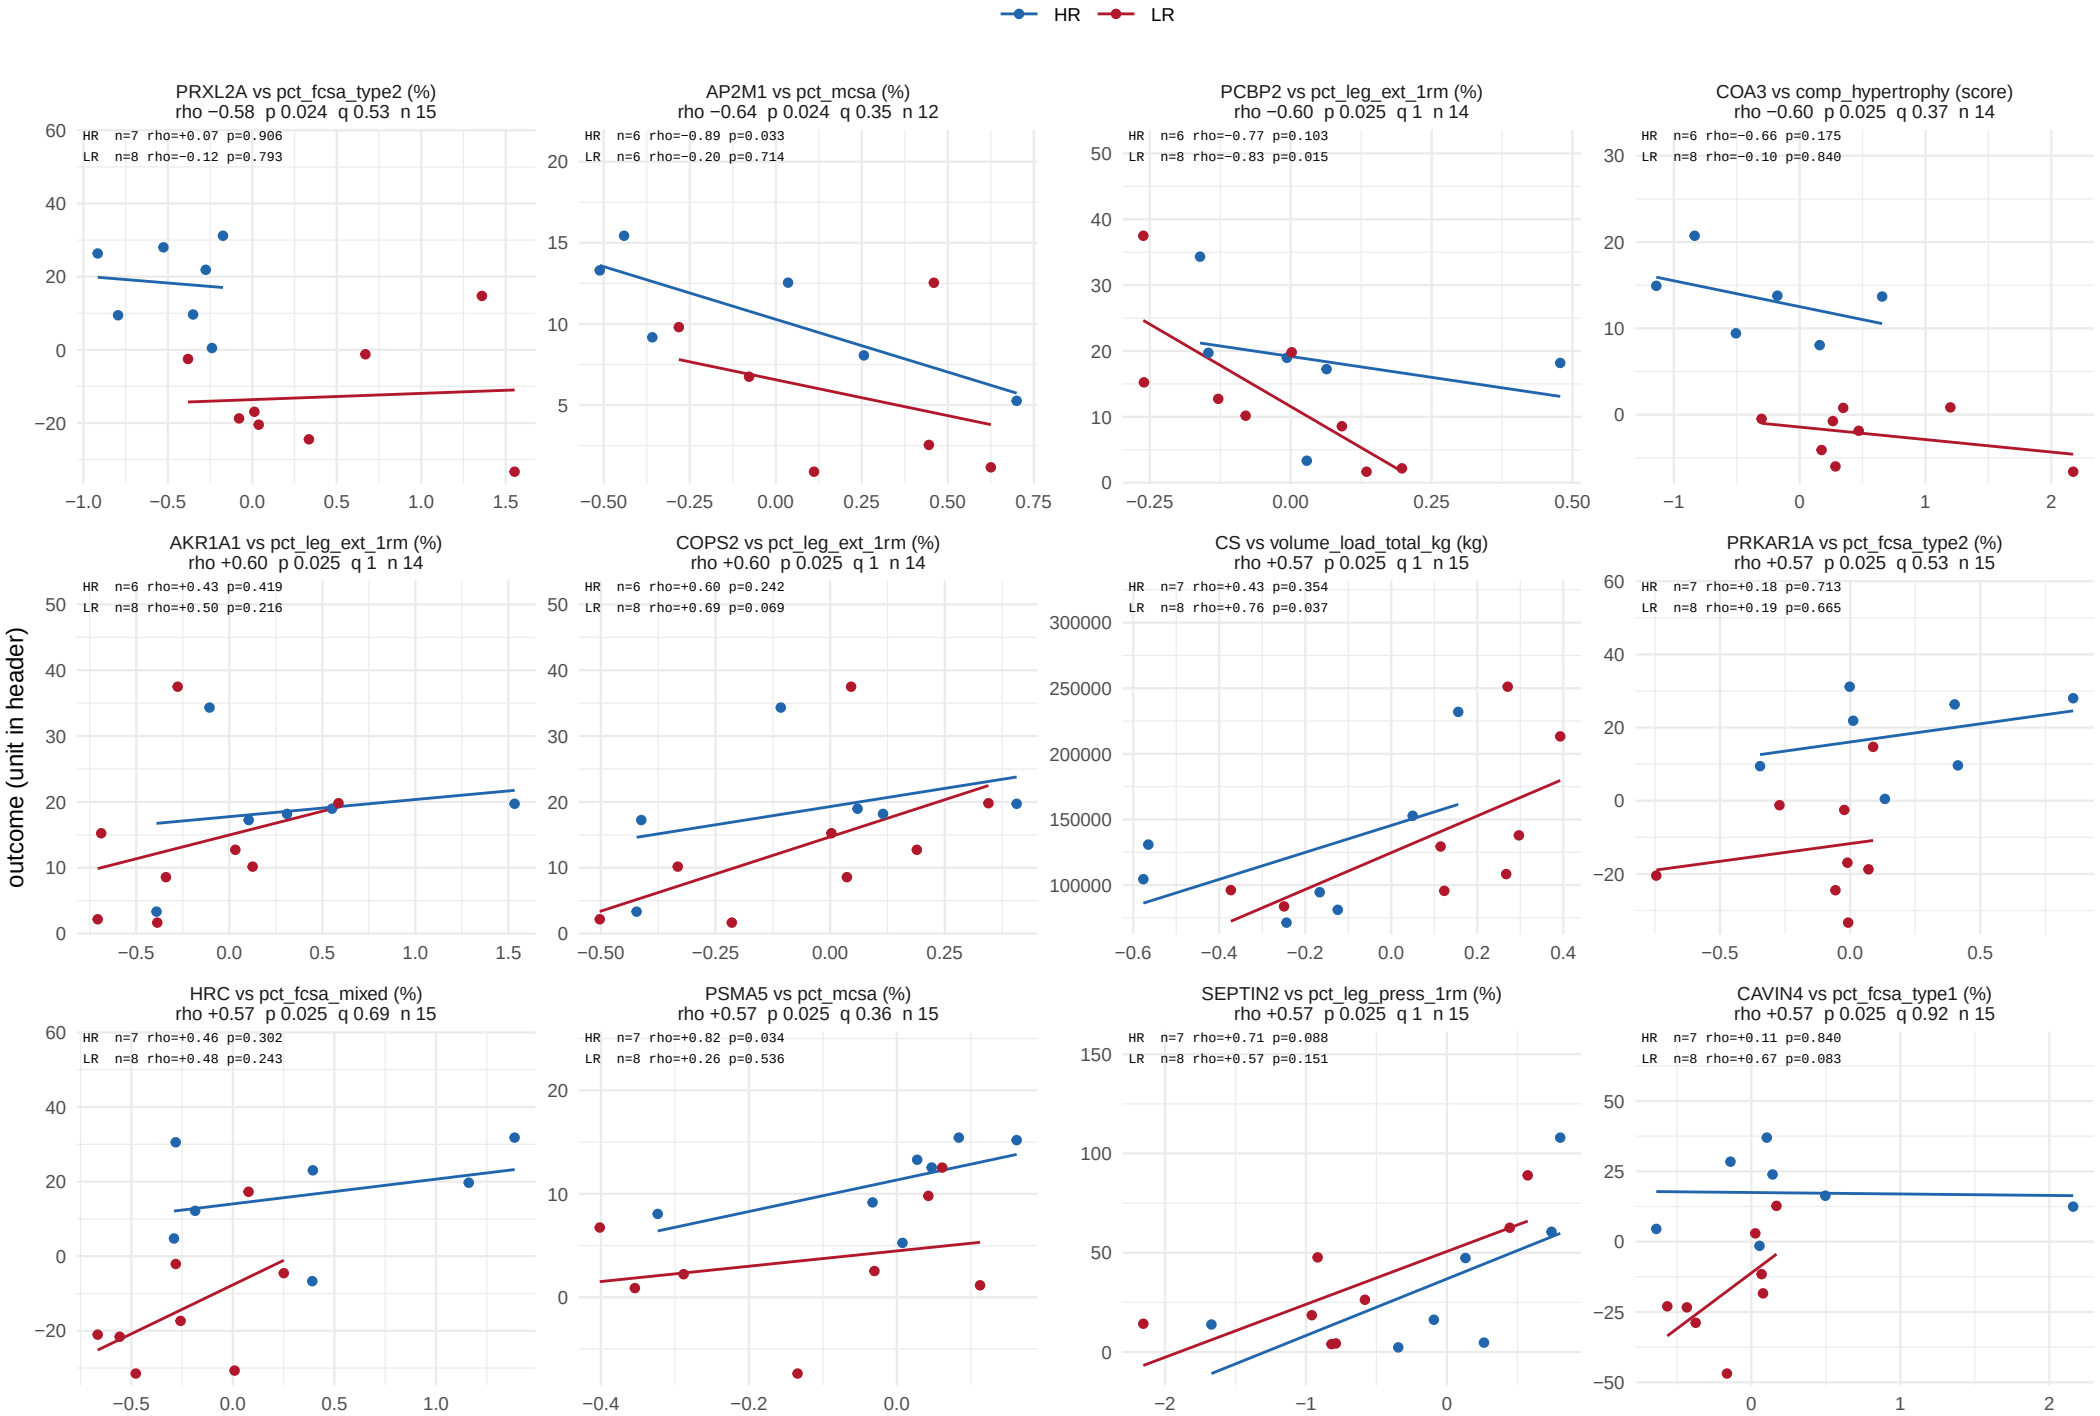

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window

741 of 11747 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 35 of 62.

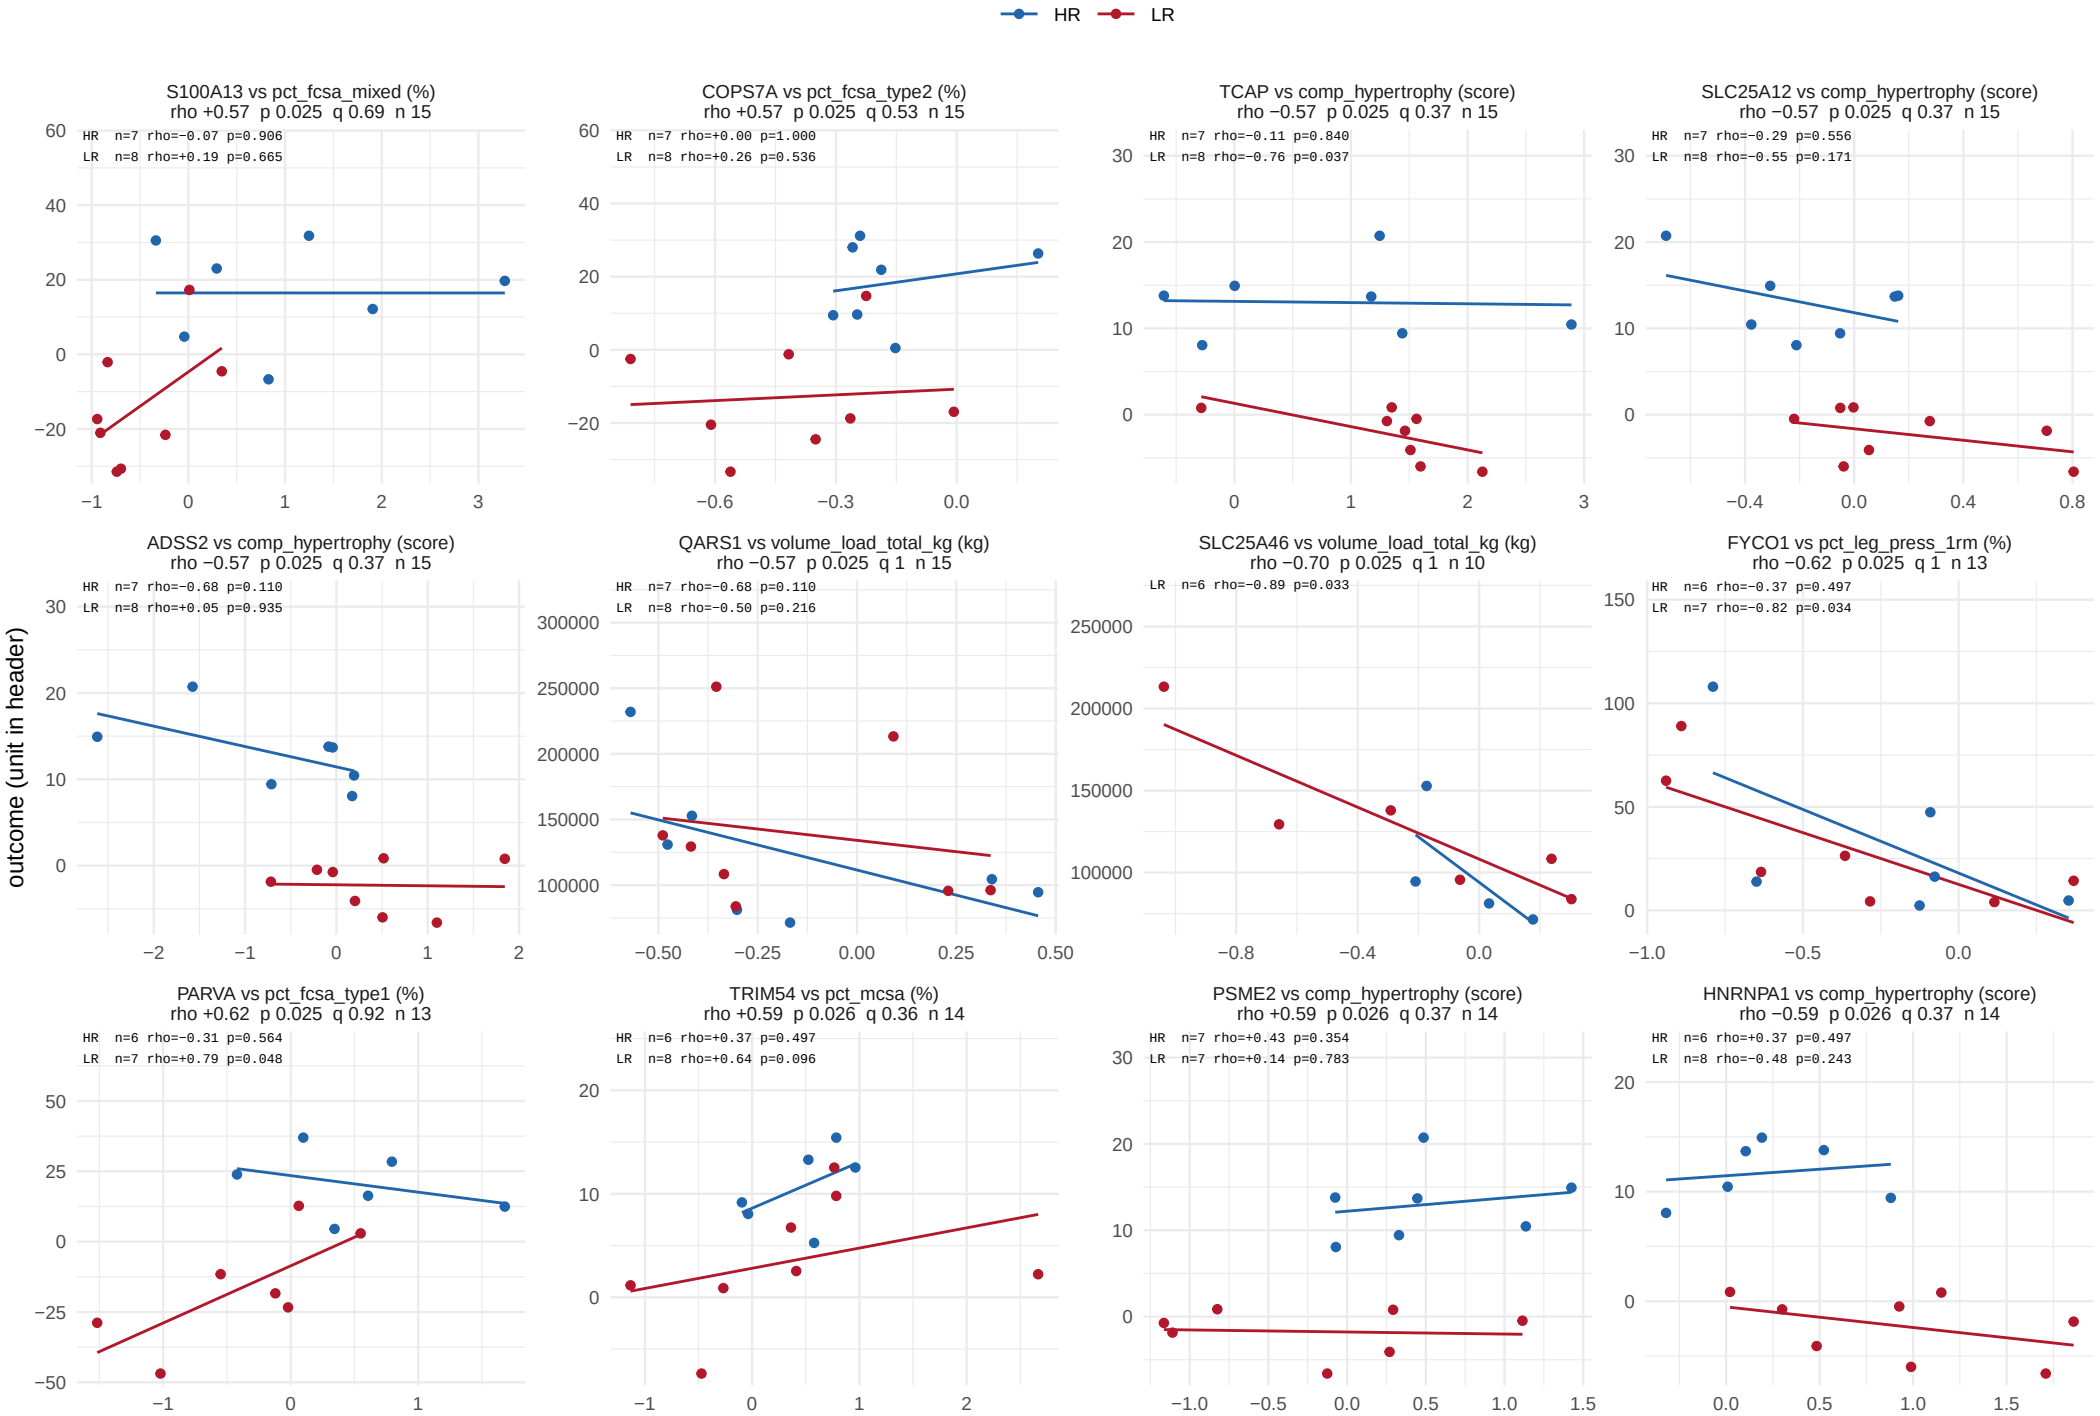

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


741 of 11747 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 36 of 62.



One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


741 of 11747 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 37 of 62.

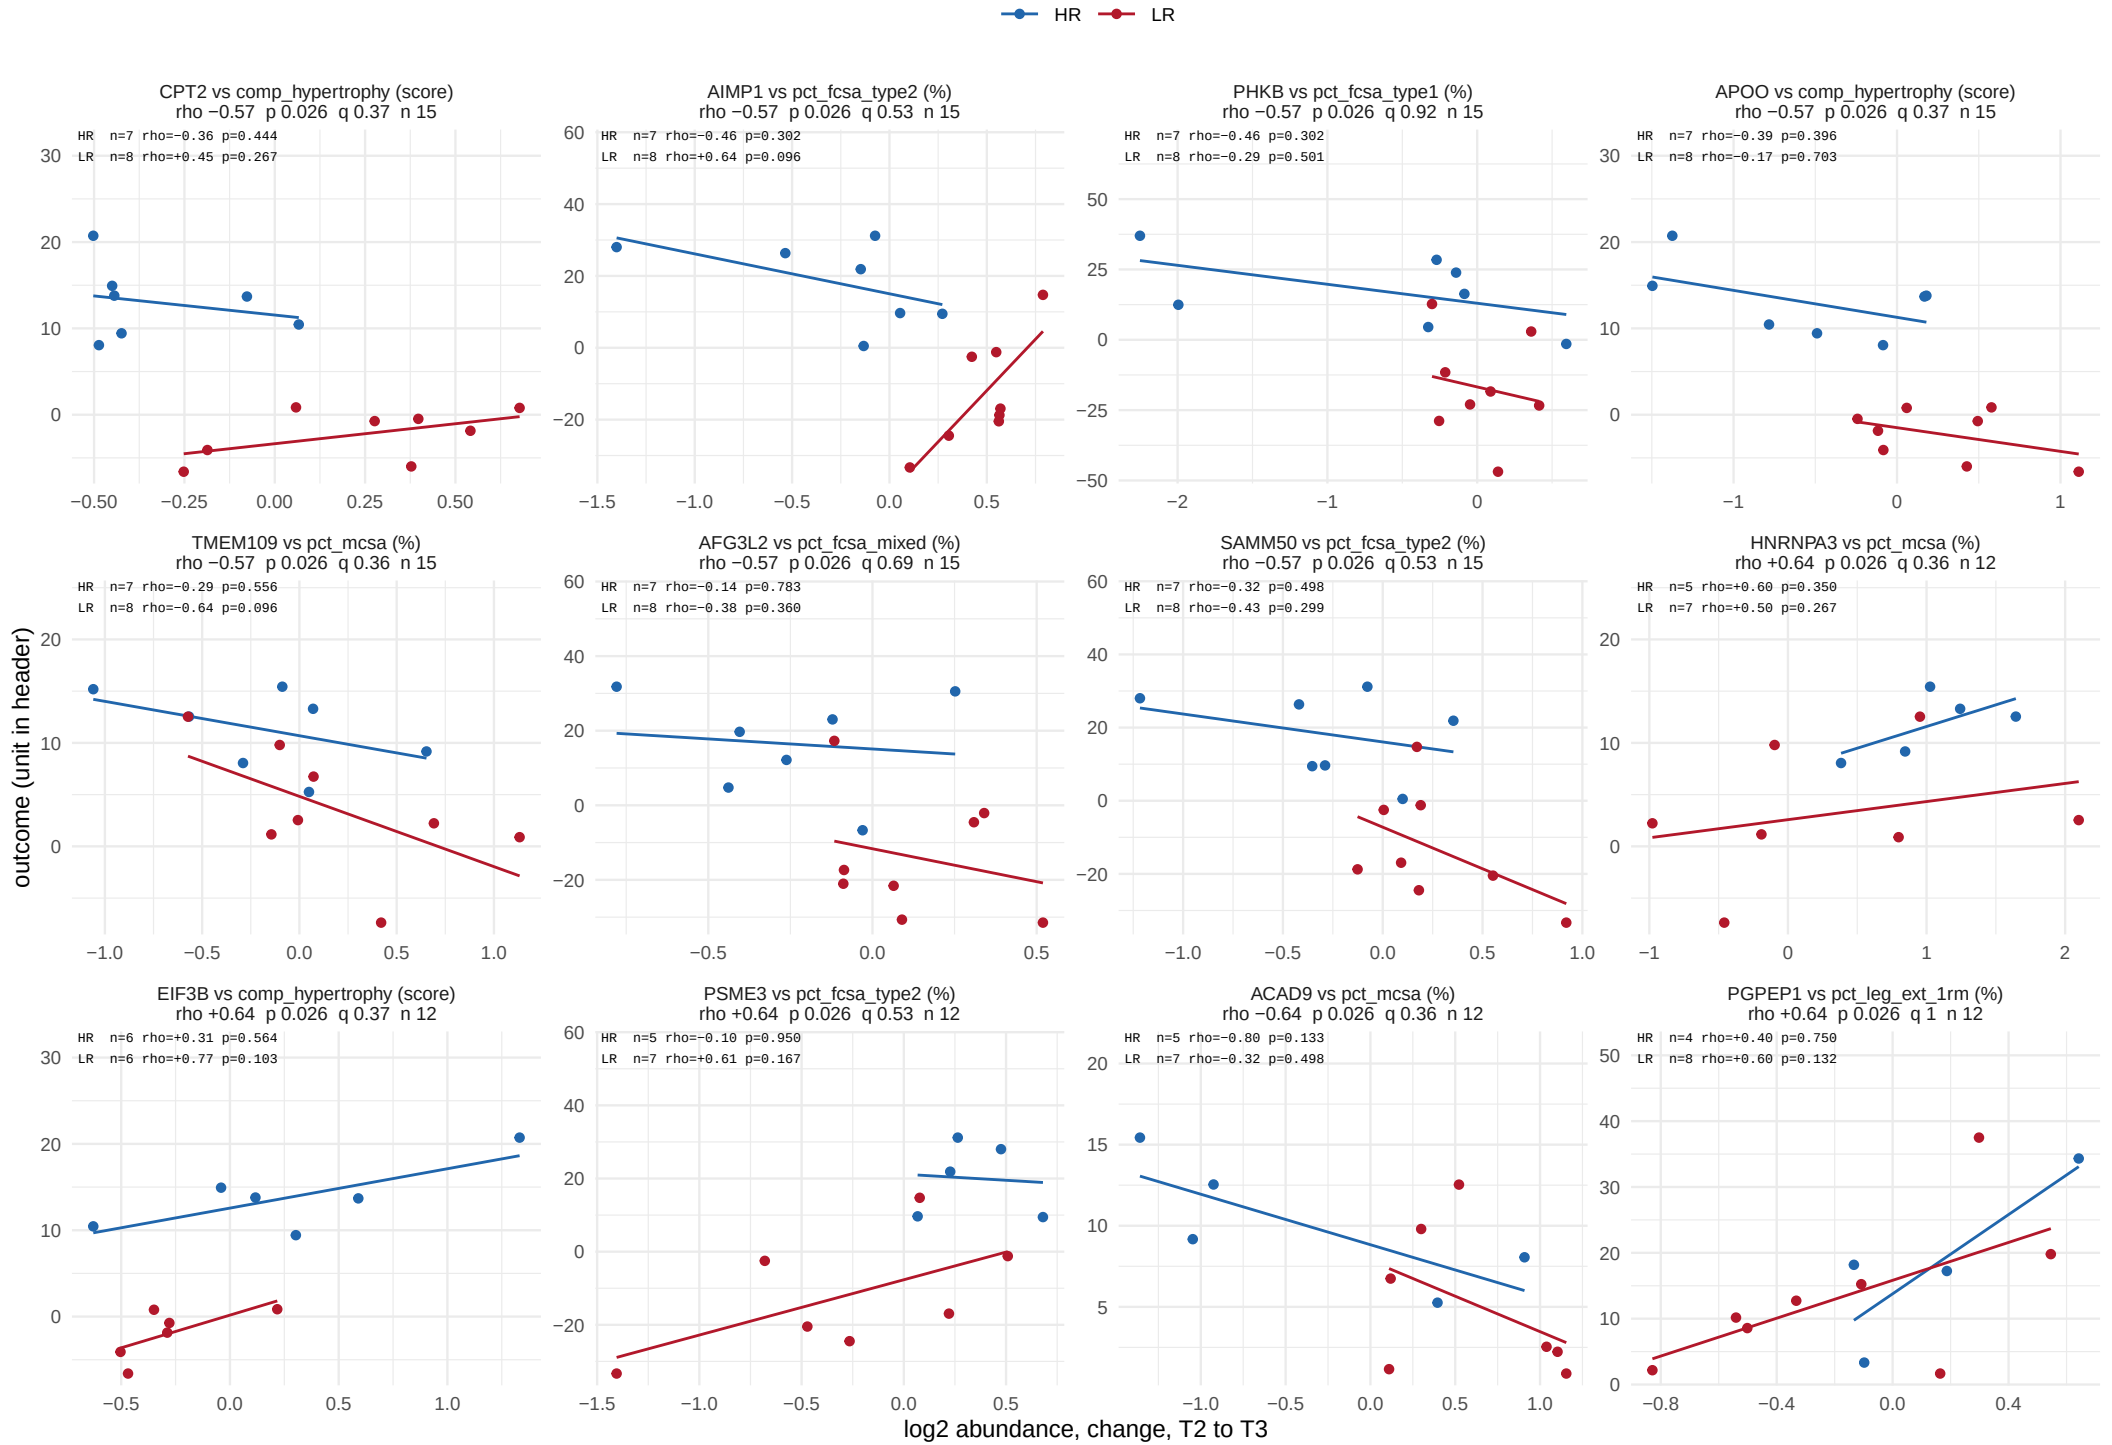

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


741 of 11747 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 38 of 62.

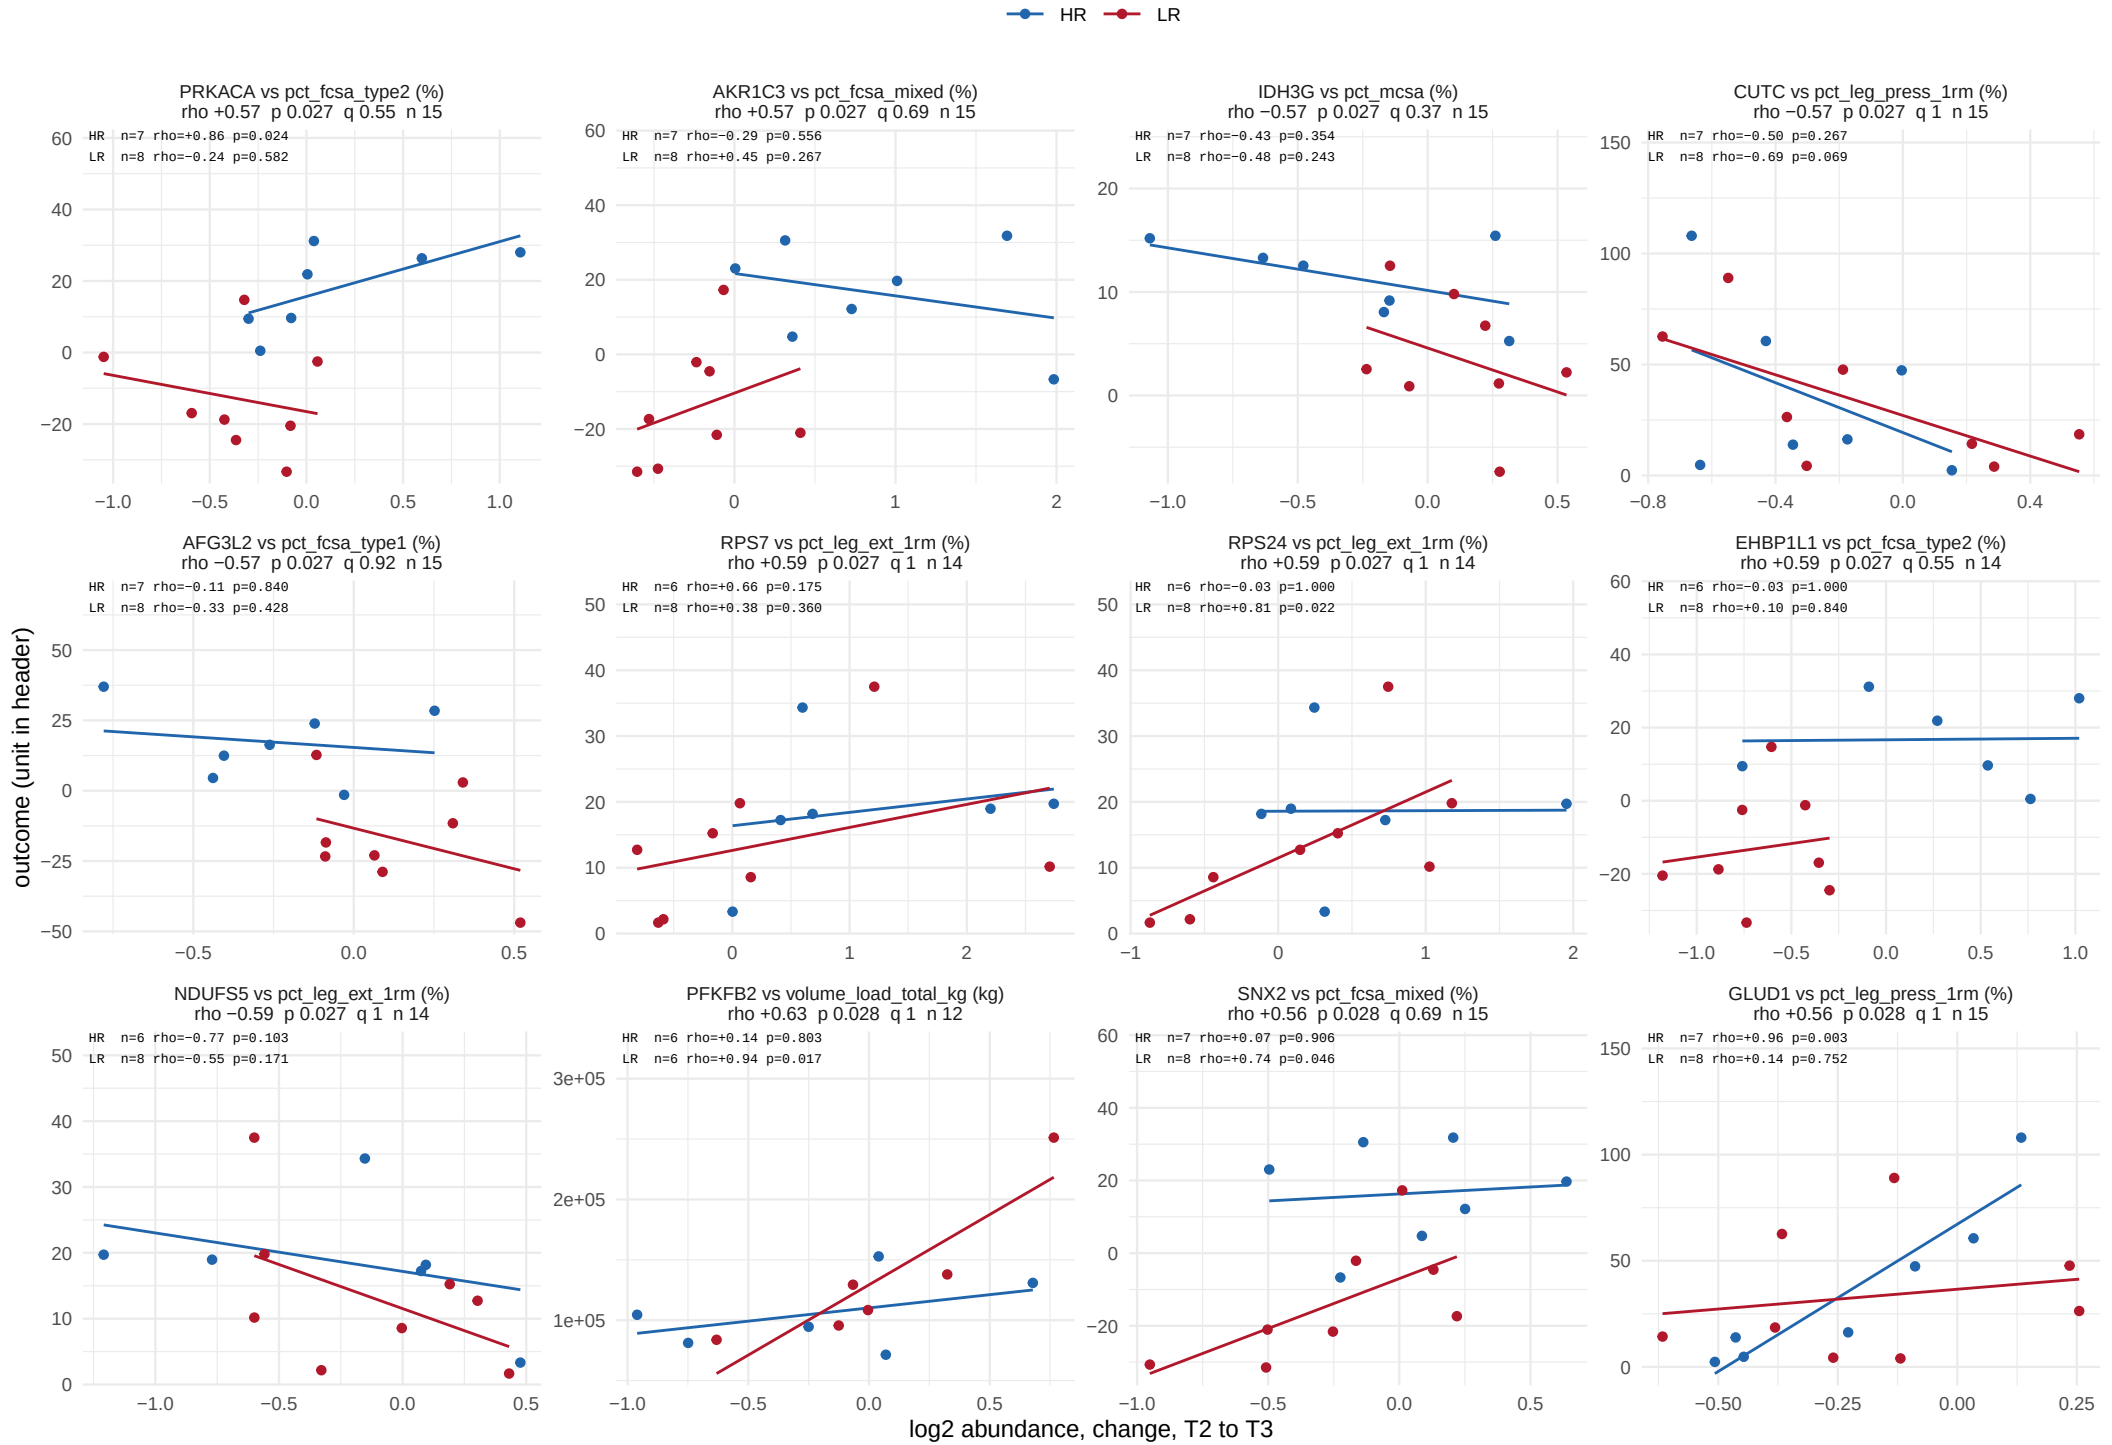

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


741 of 11747 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 39 of 62.

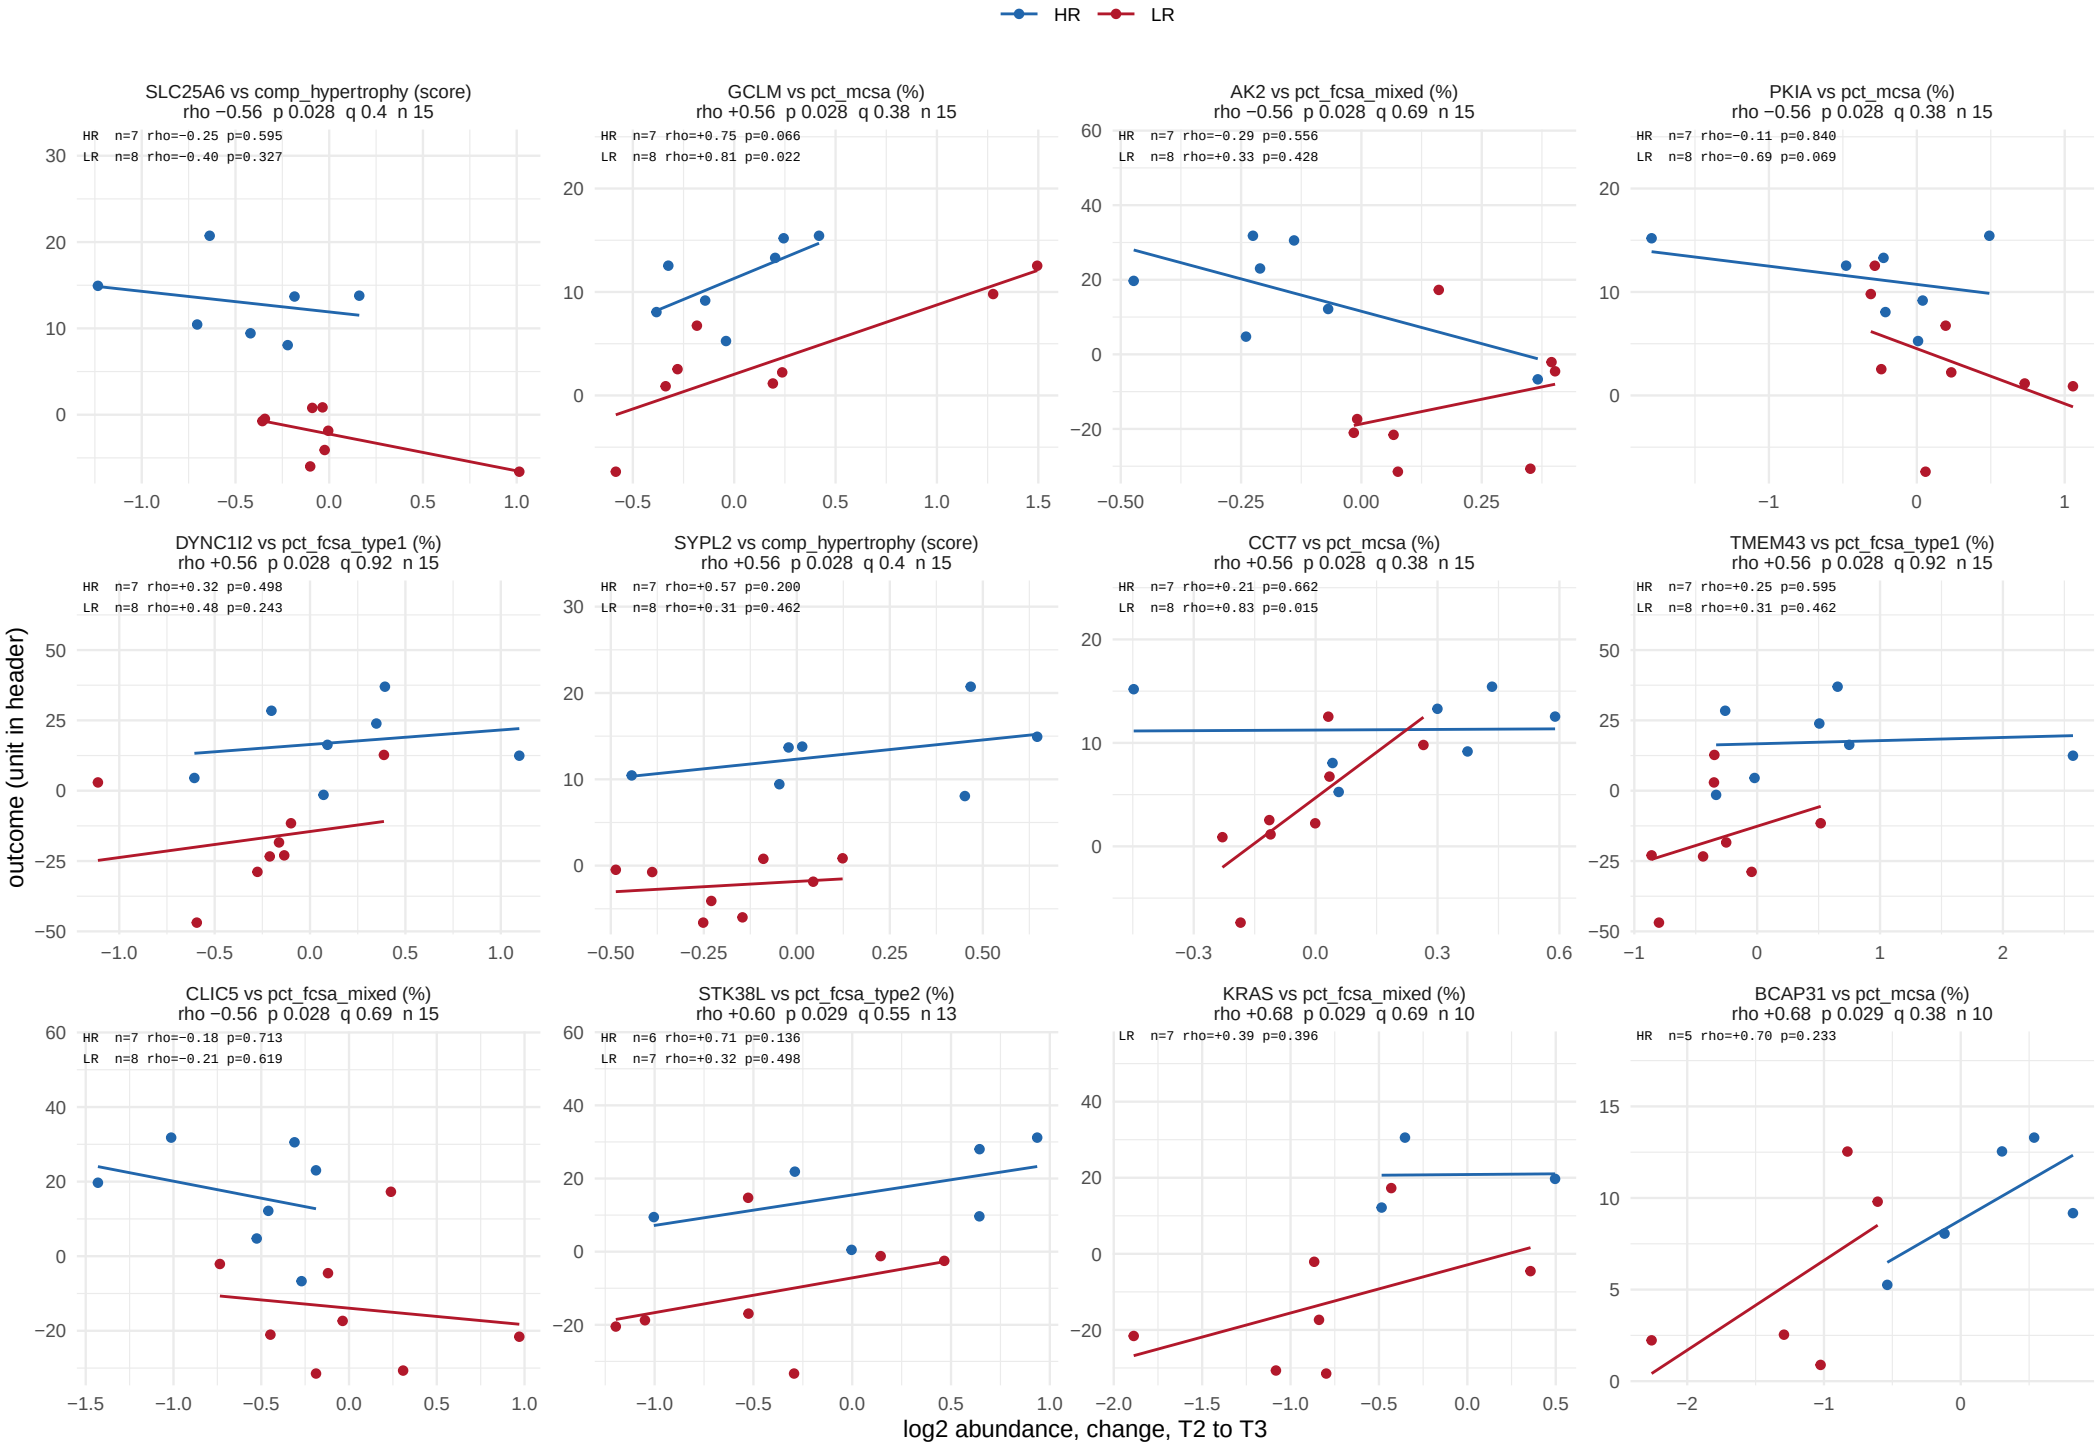

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


741 of 11747 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 40 of 62.

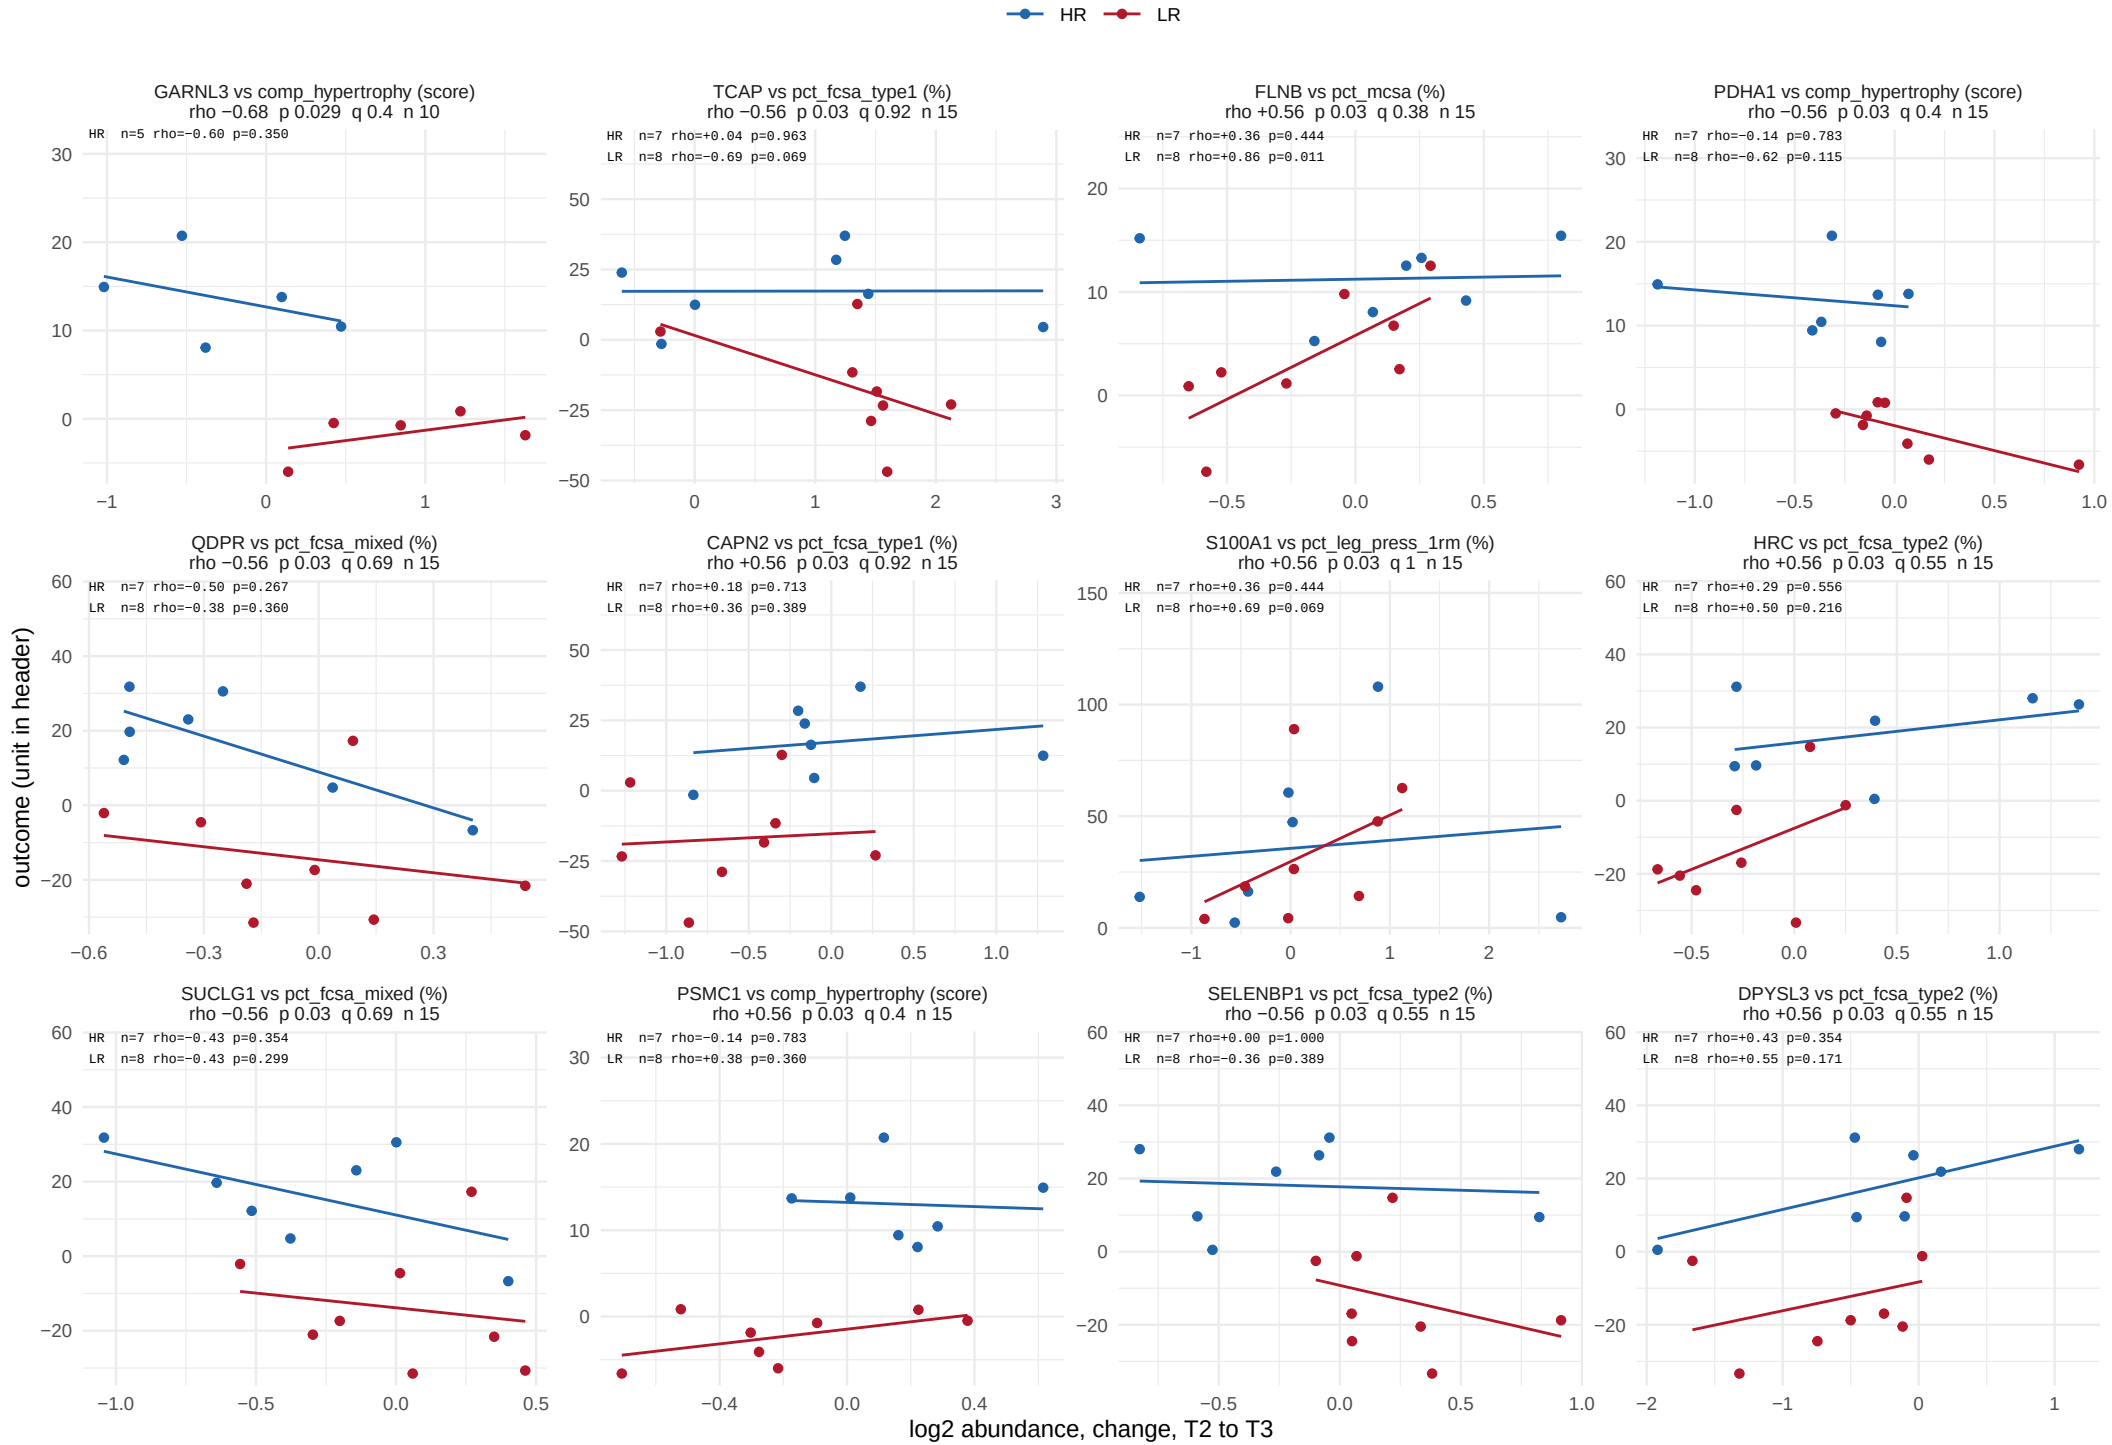

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


741 of 11747 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 41 of 62.

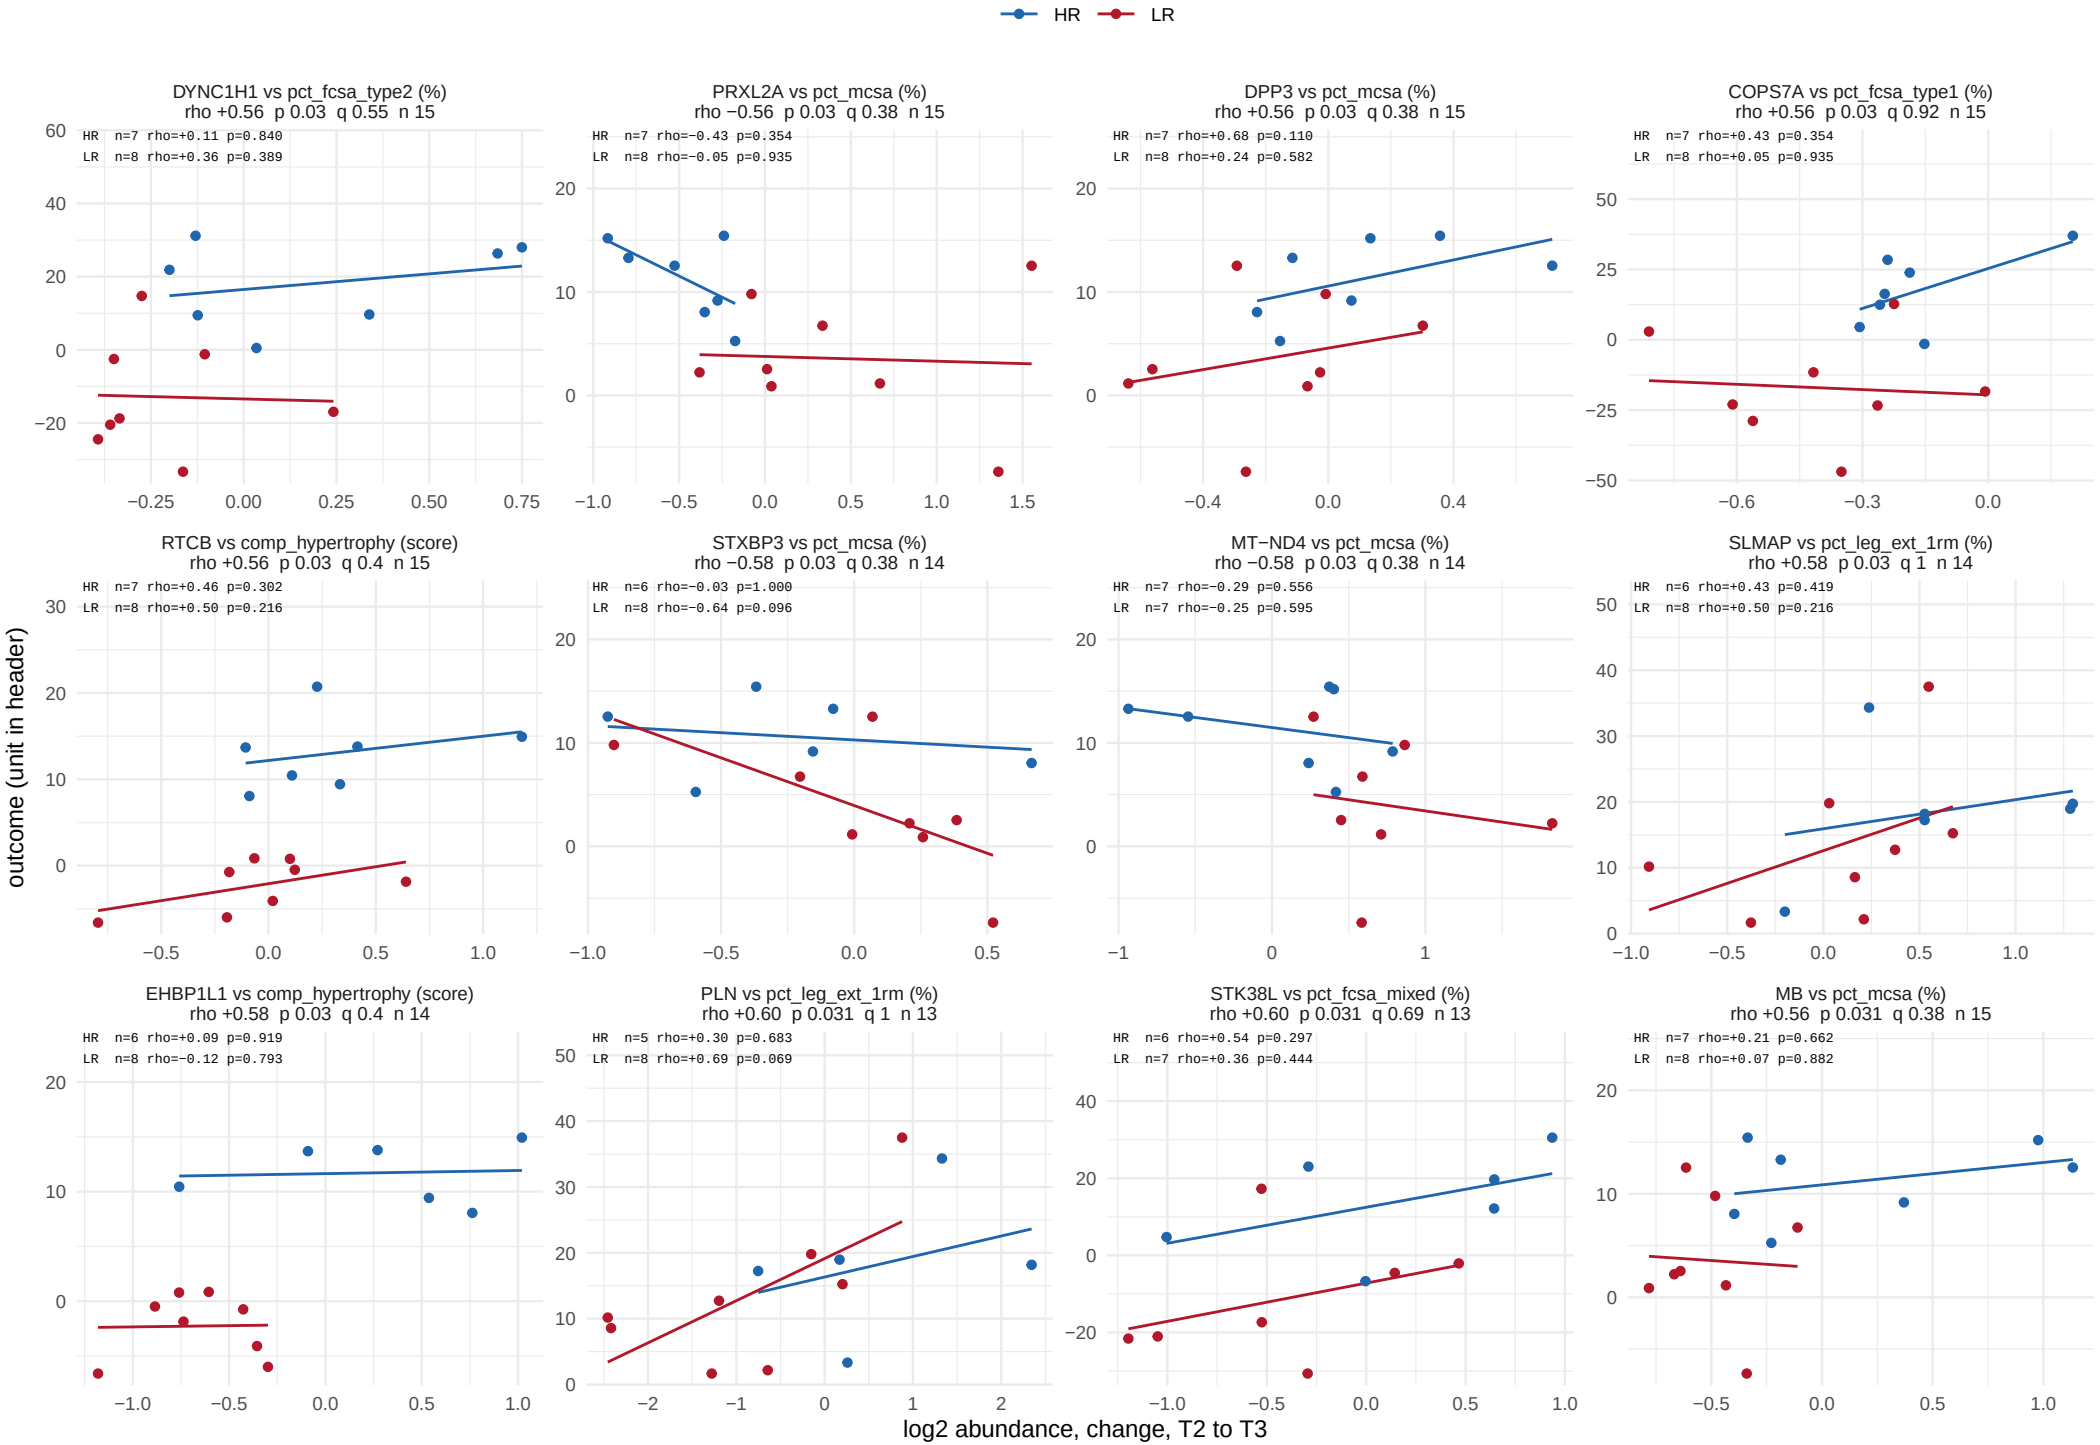

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


741 of 11747 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 42 of 62.

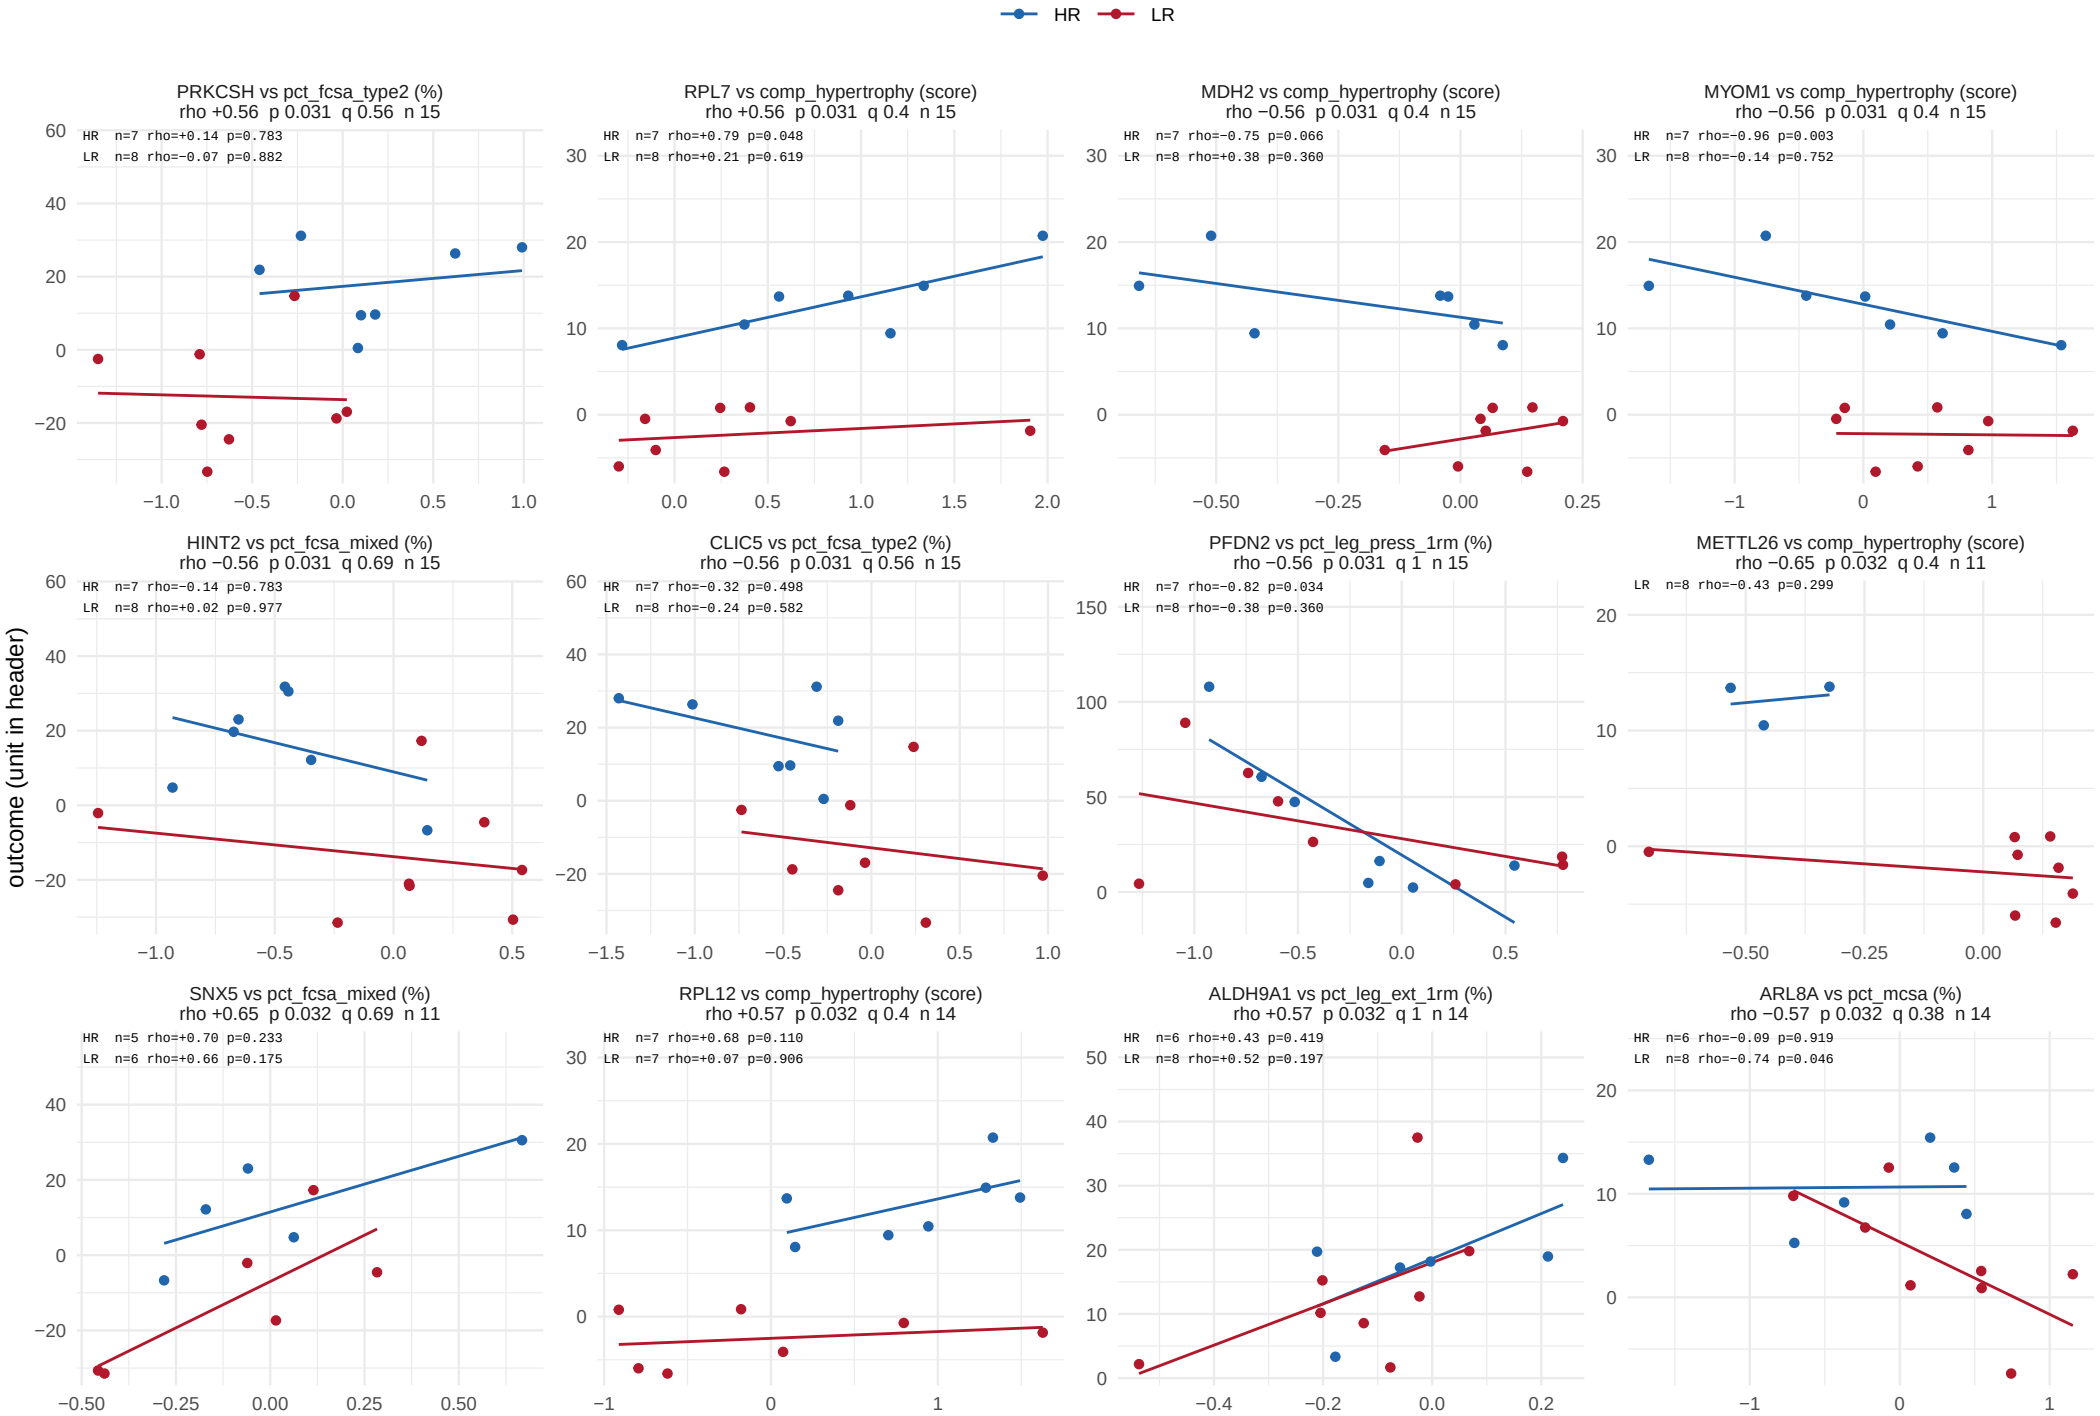

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


741 of 11747 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 43 of 62.

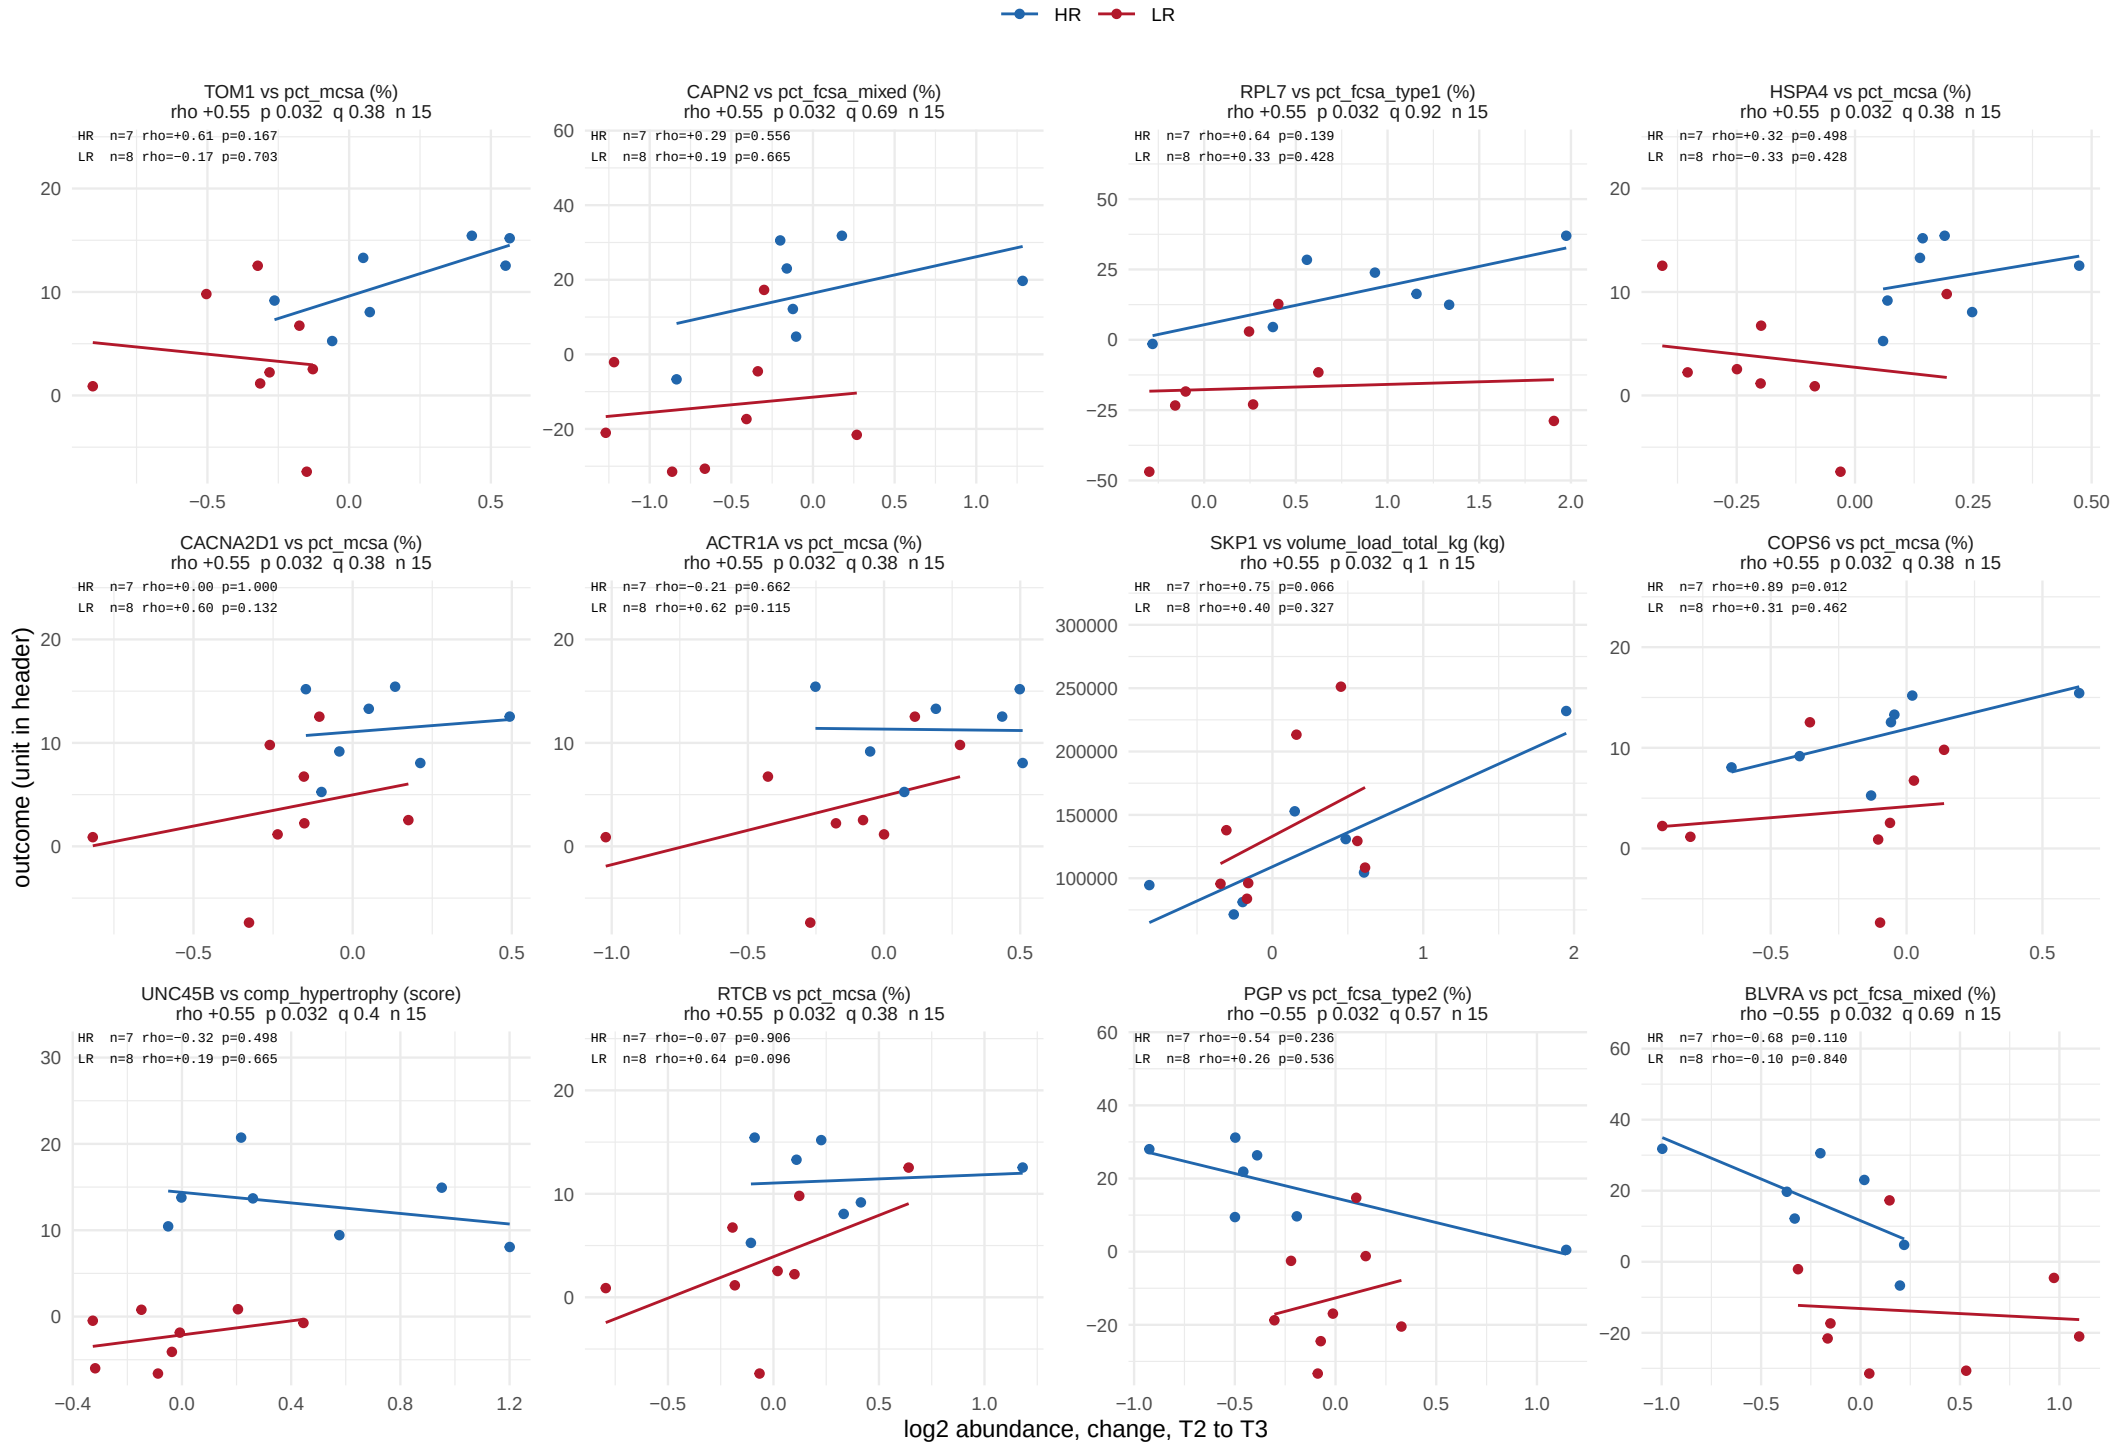

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


741 of 11747 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 44 of 62.

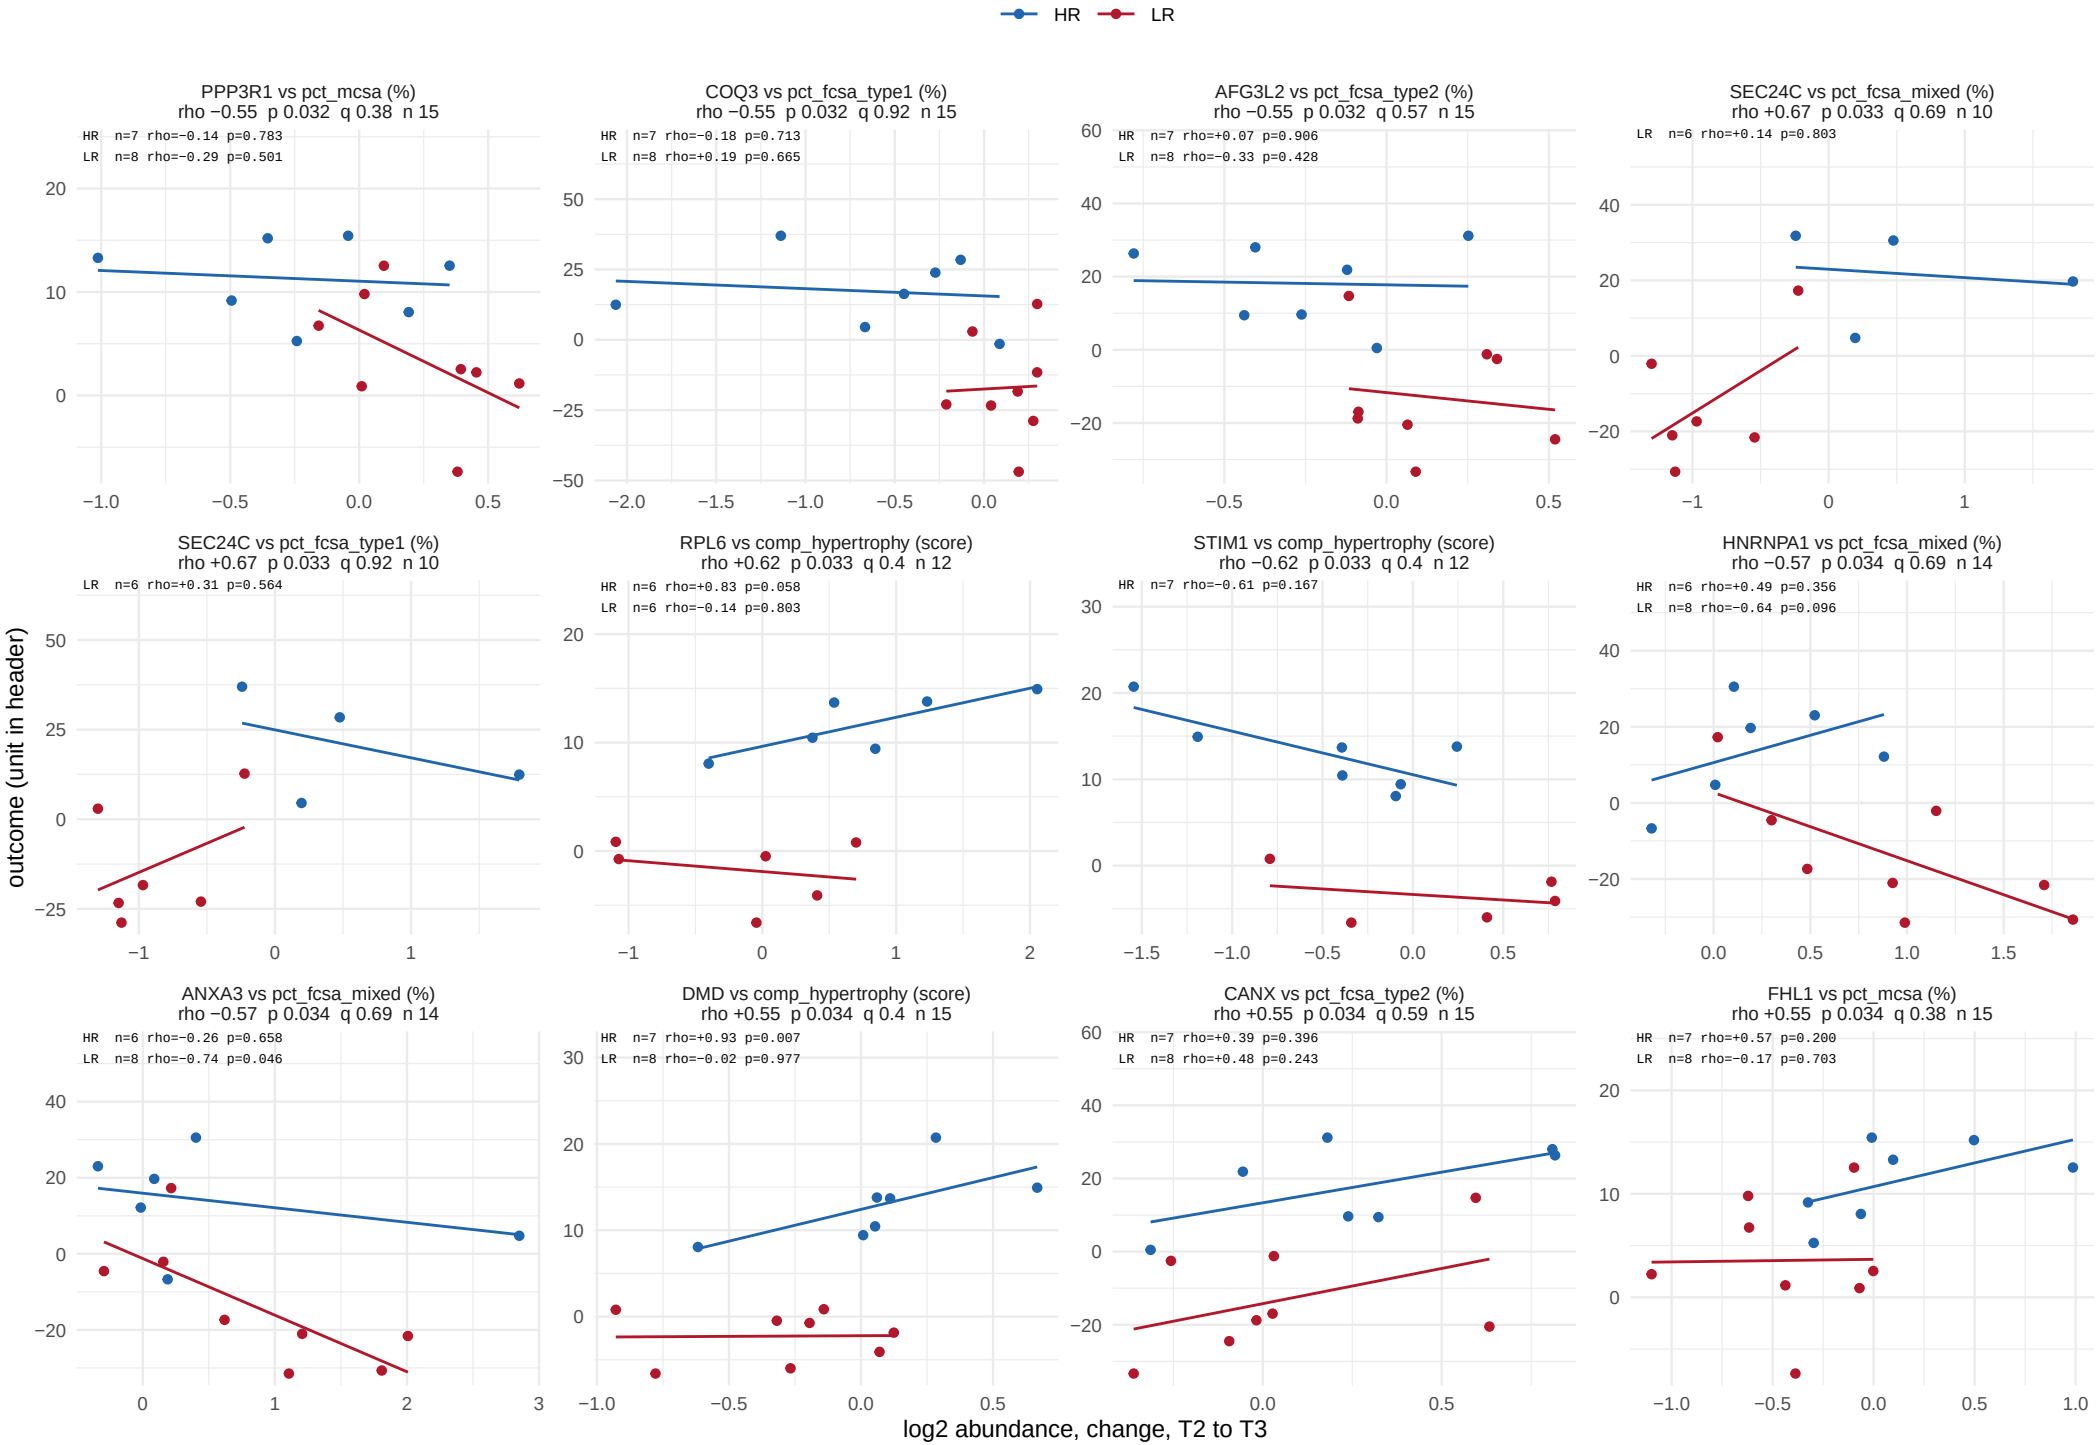

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


741 of 11747 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 45 of 62.

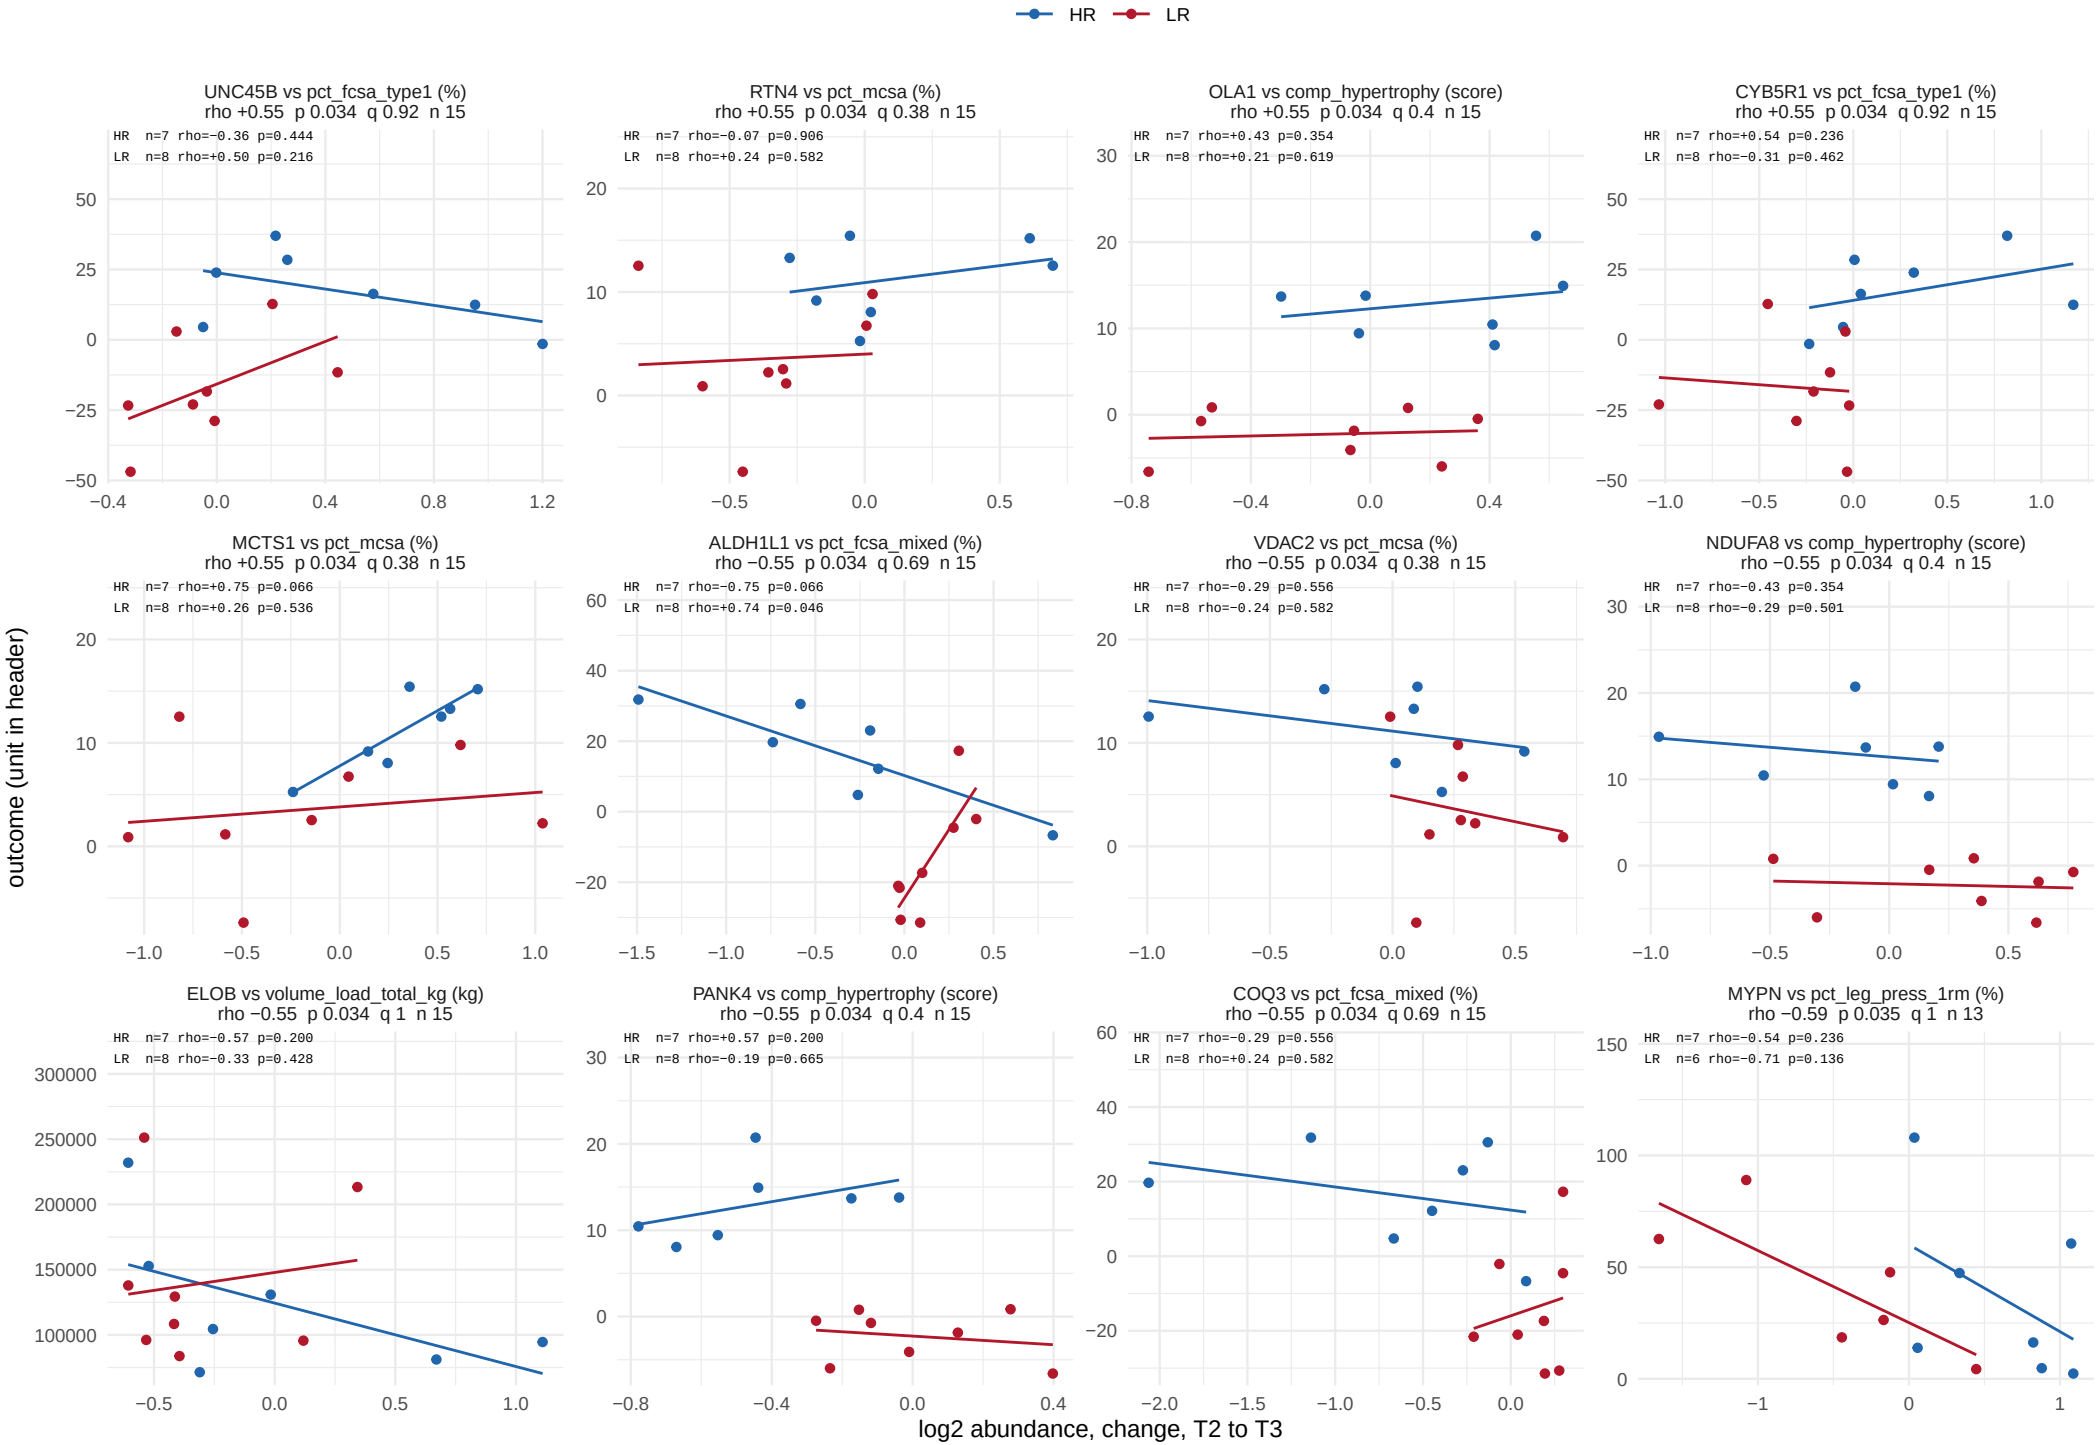

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


741 of 11747 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 46 of 62.

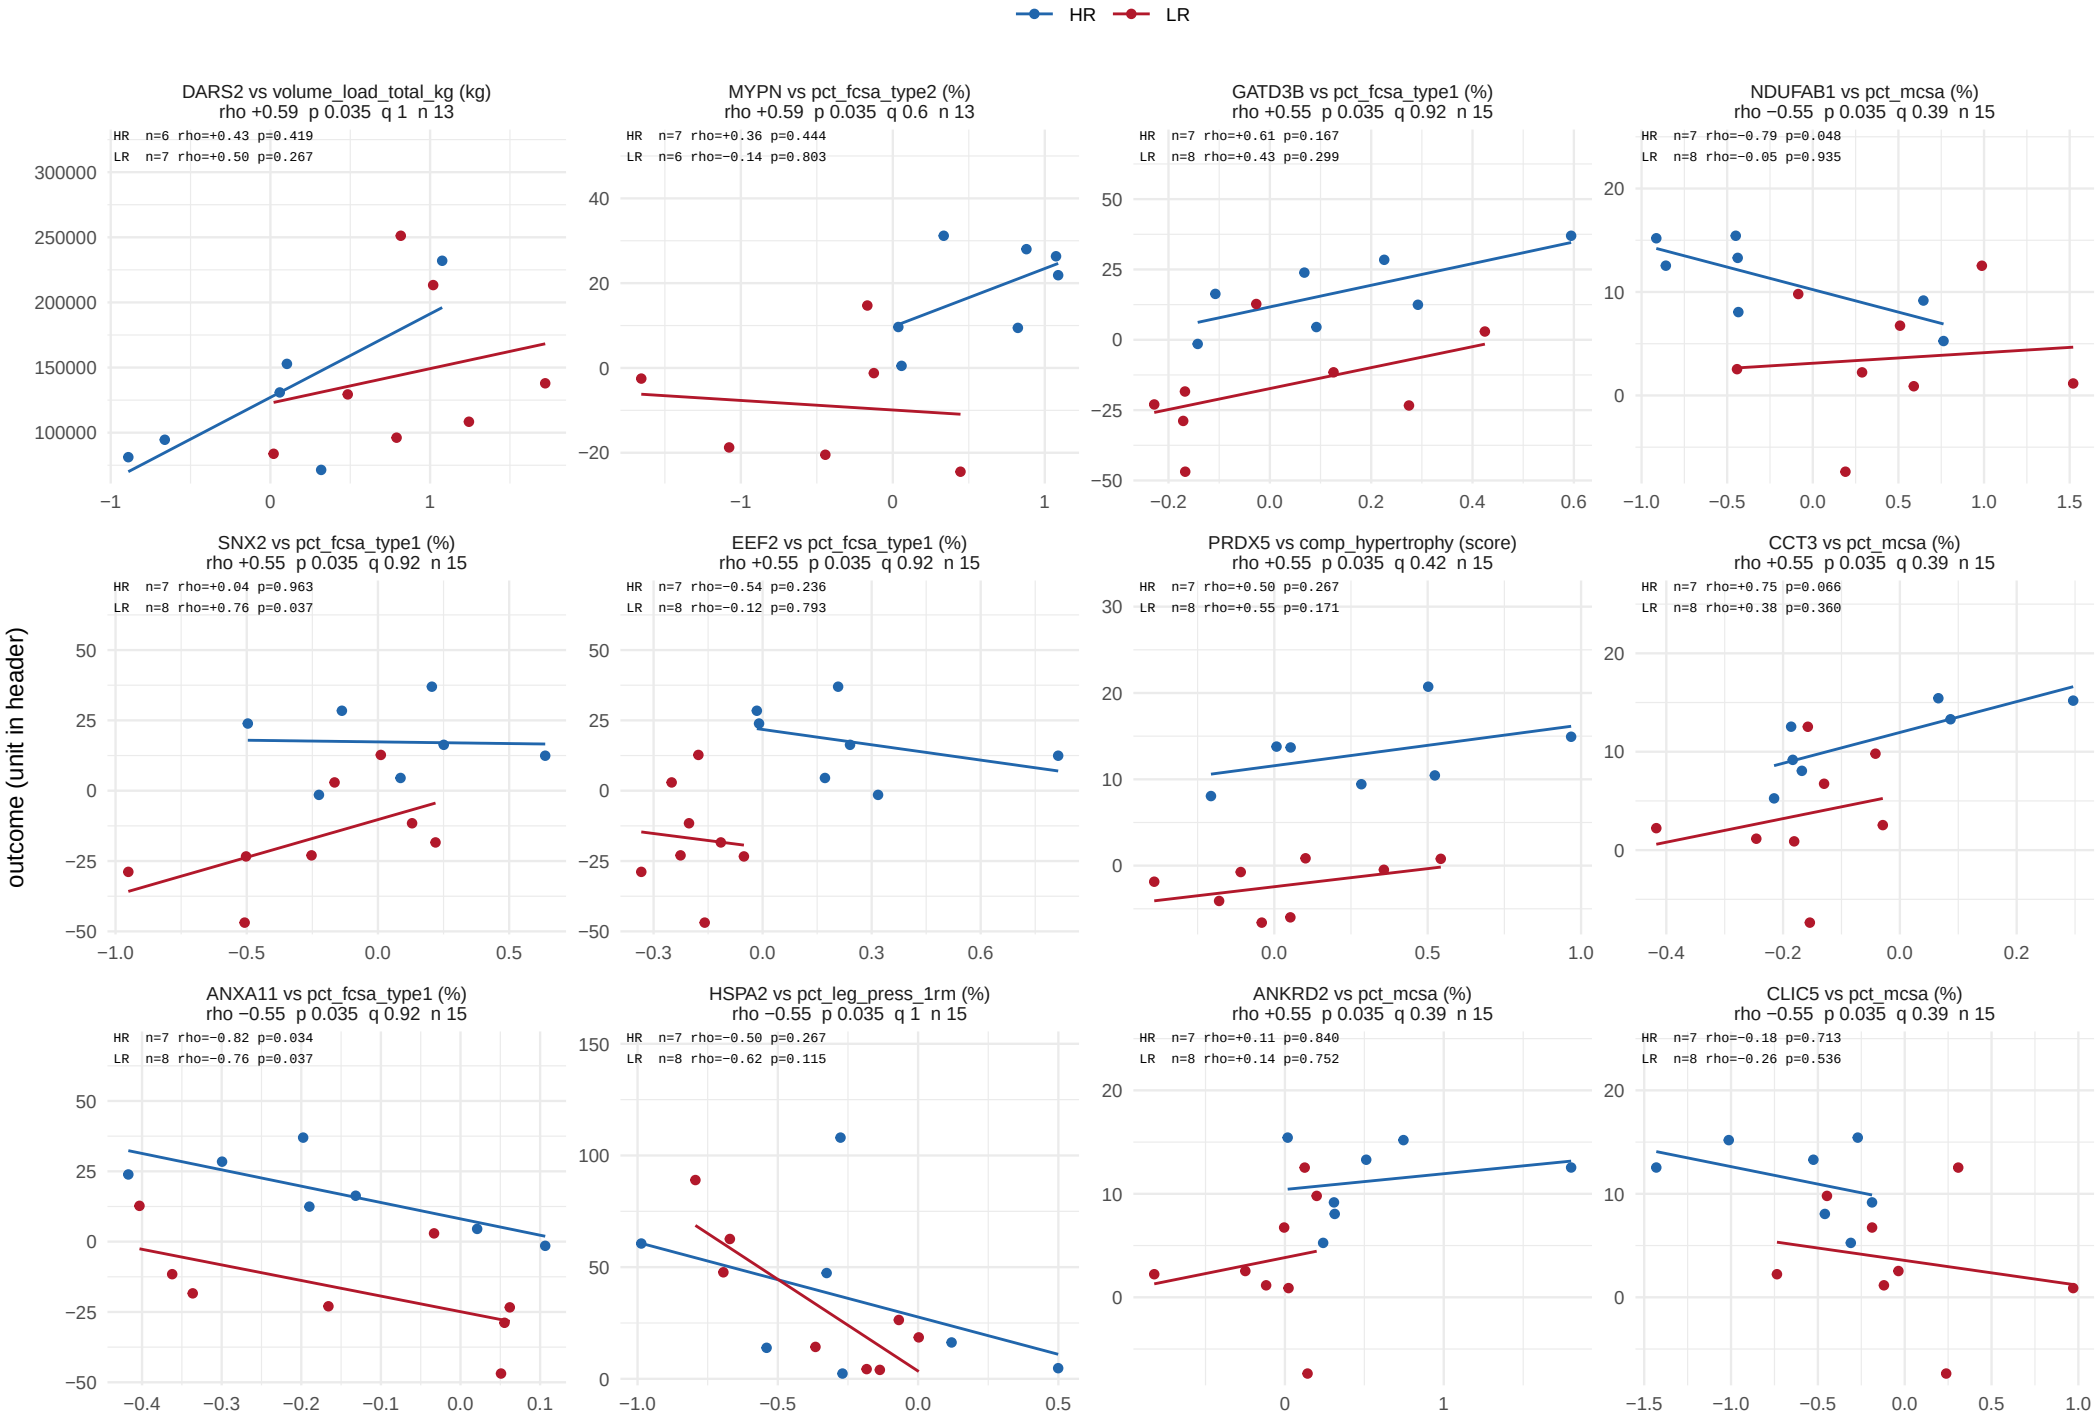

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


741 of 11747 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 47 of 62.

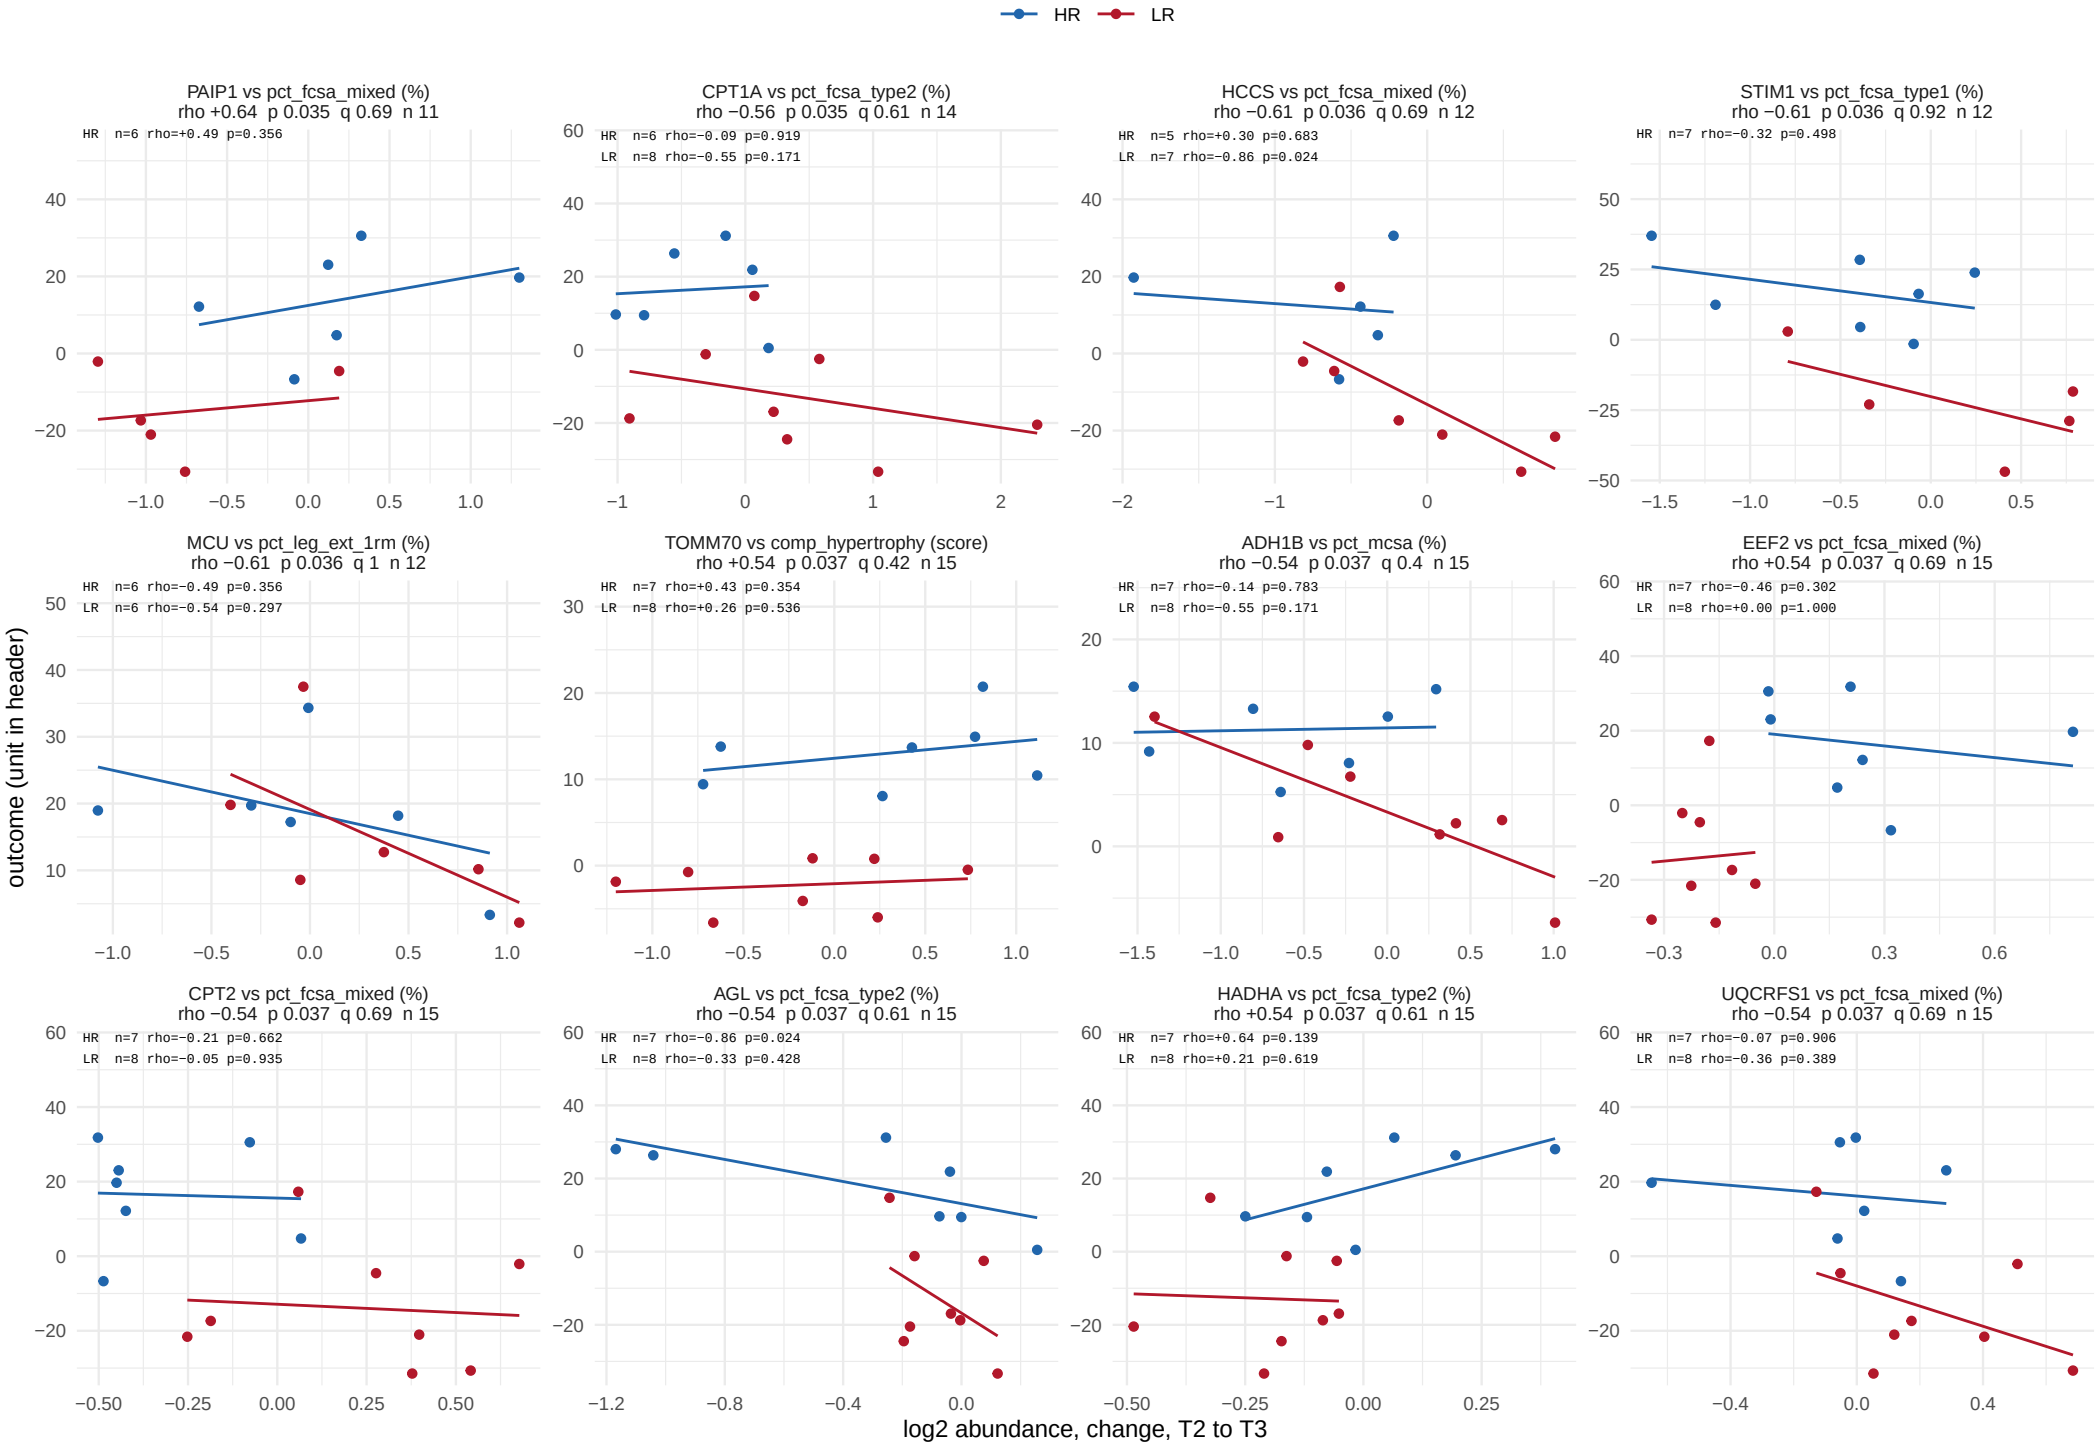

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


741 of 11747 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 48 of 62.

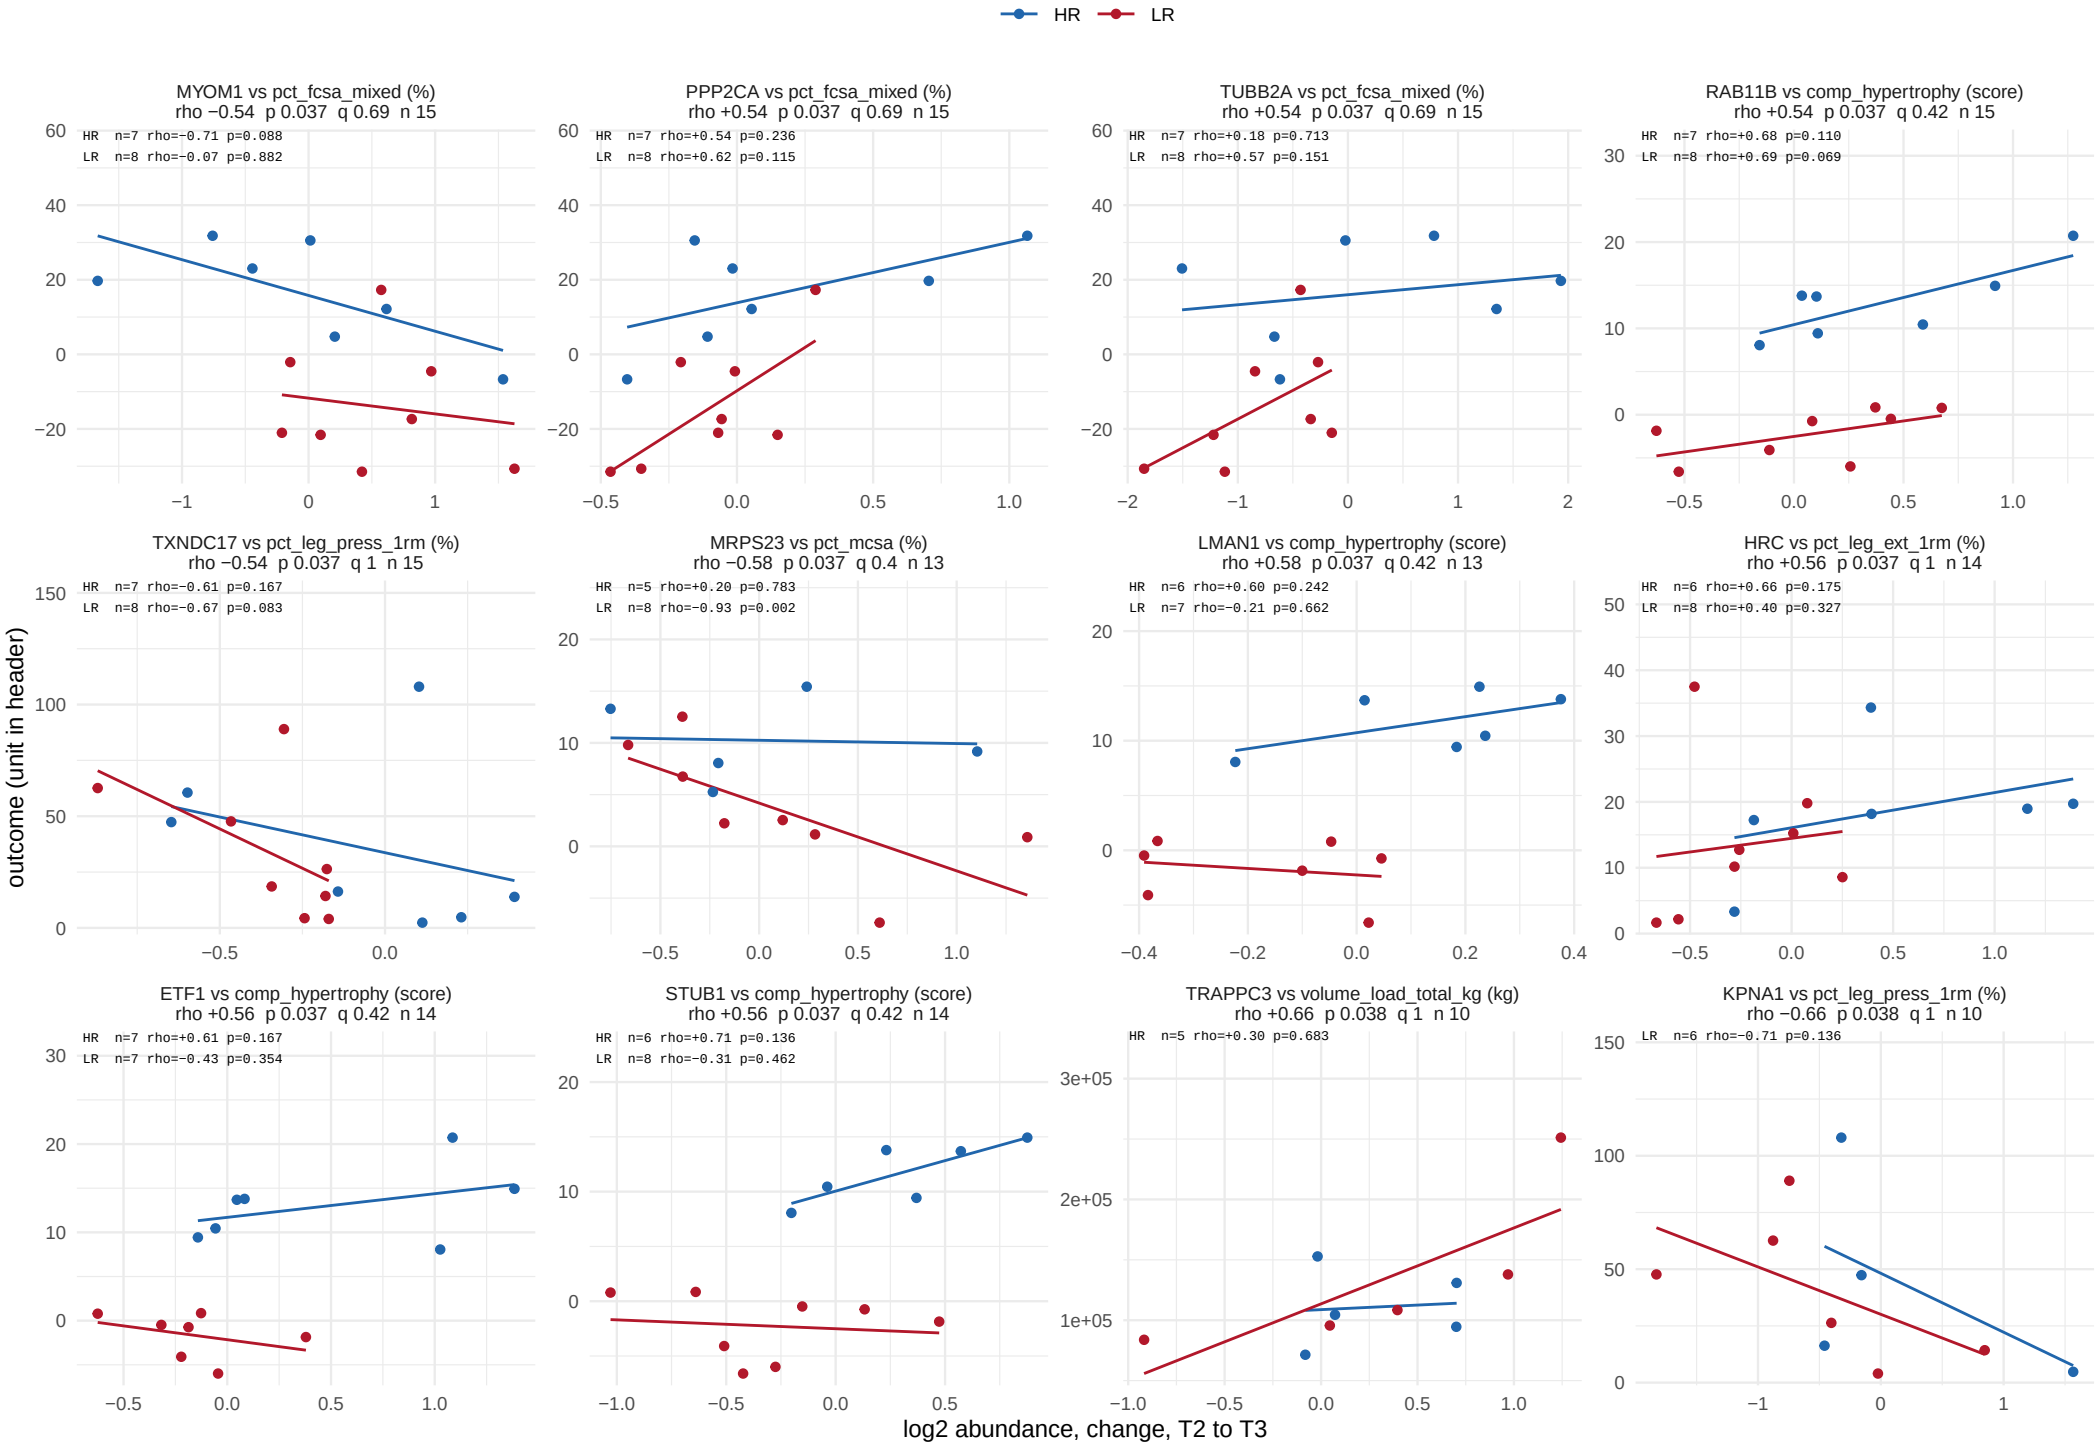

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


741 of 11747 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 49 of 62.

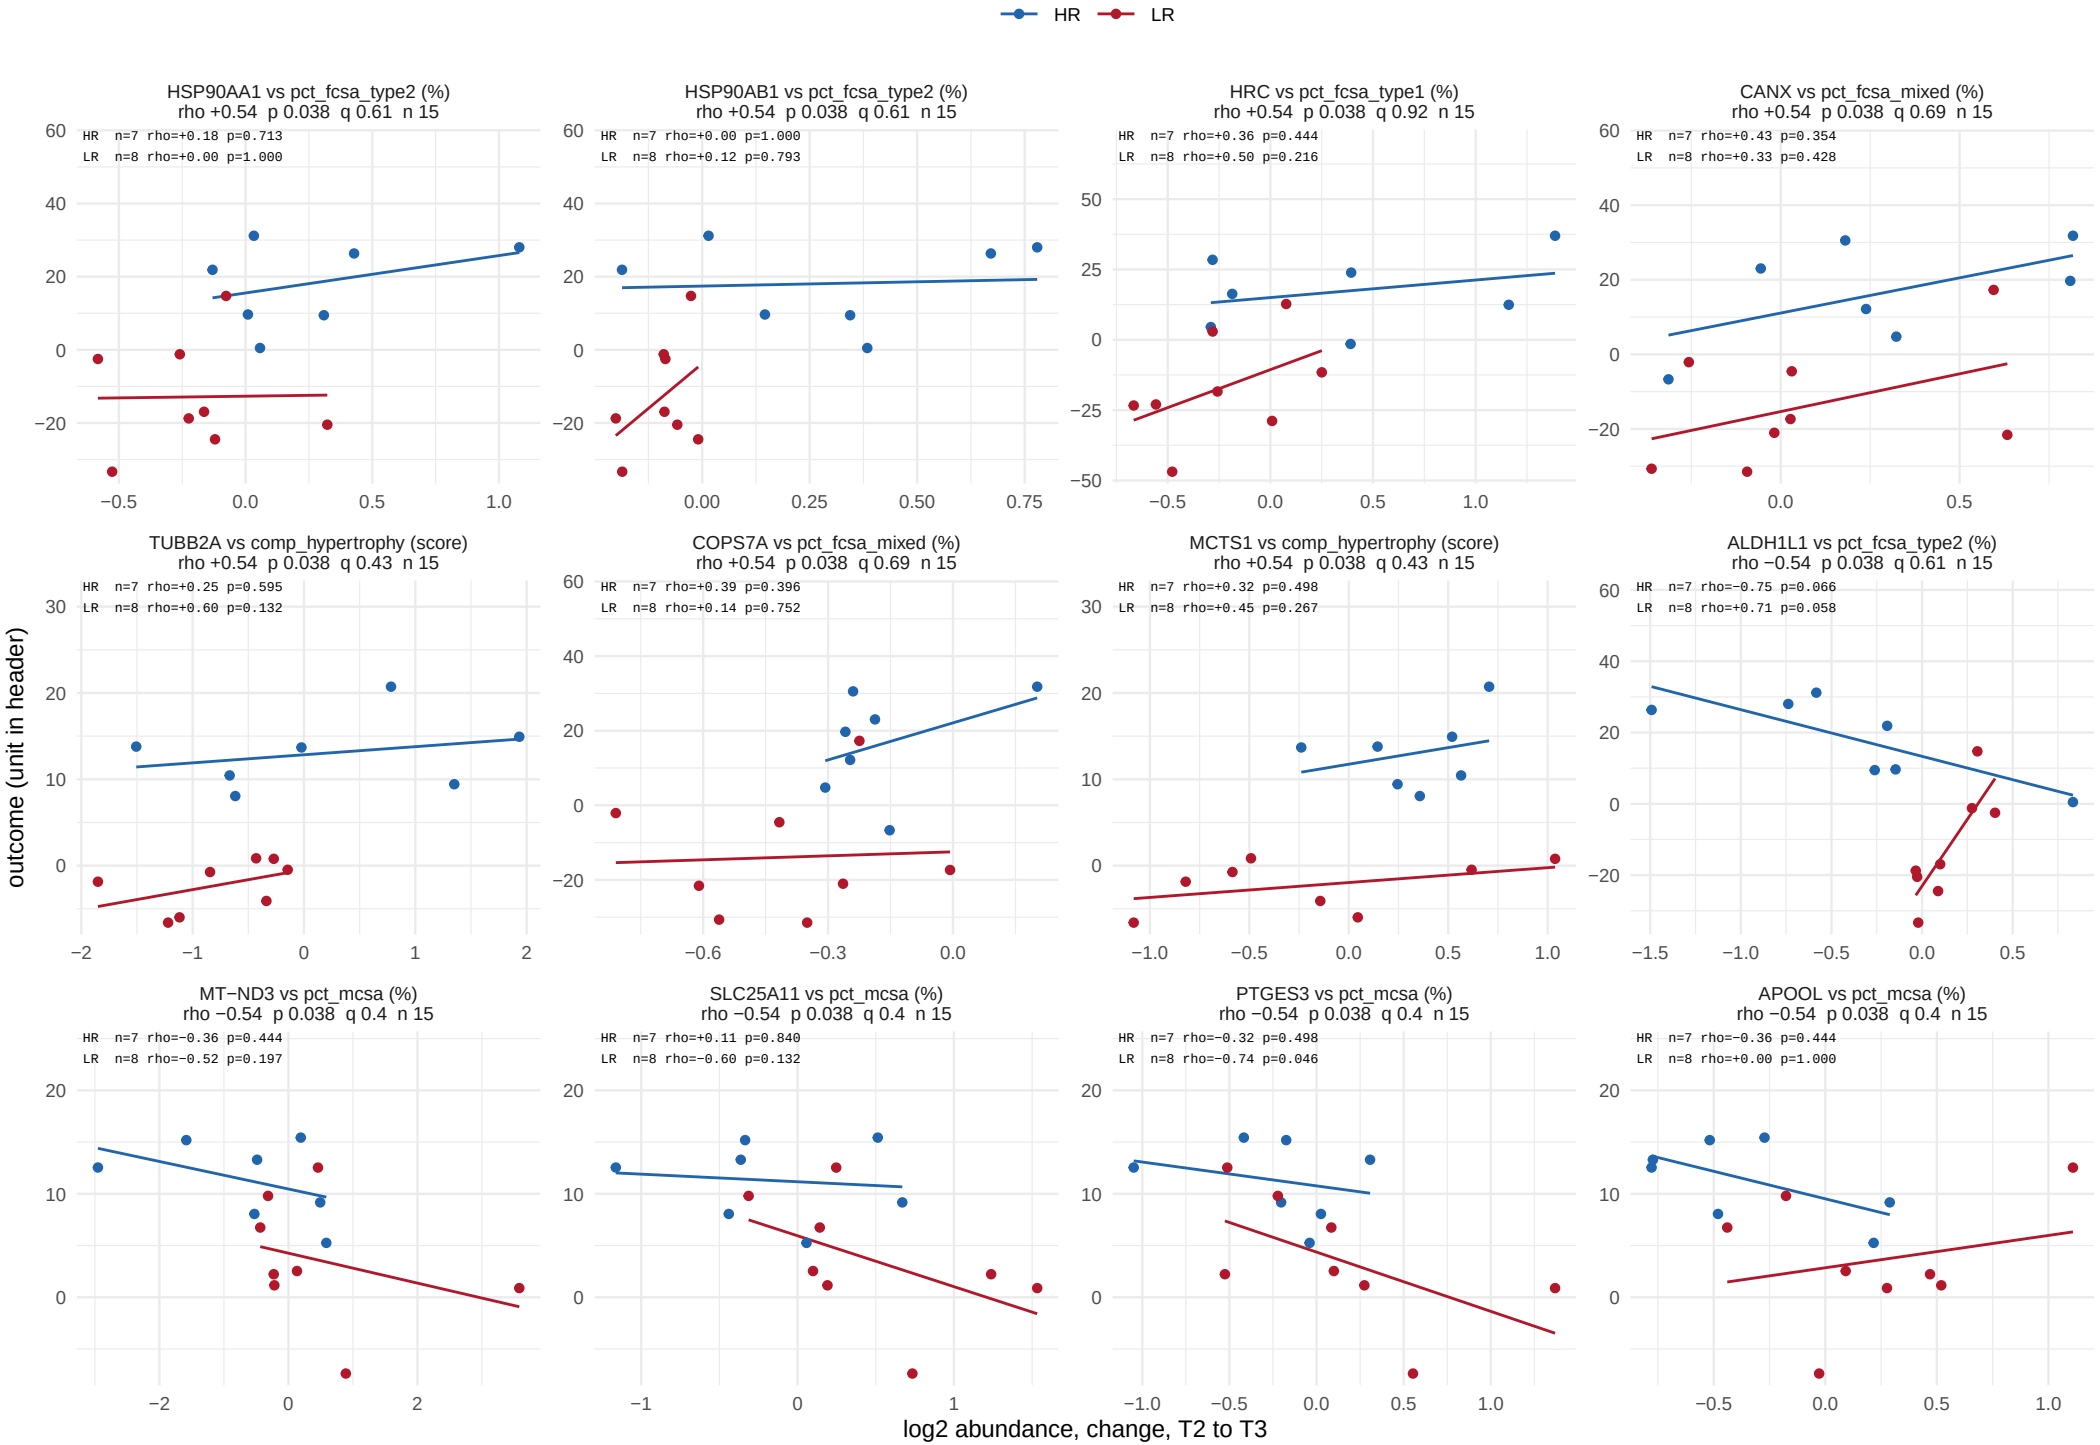

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


741 of 11747 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 50 of 62.

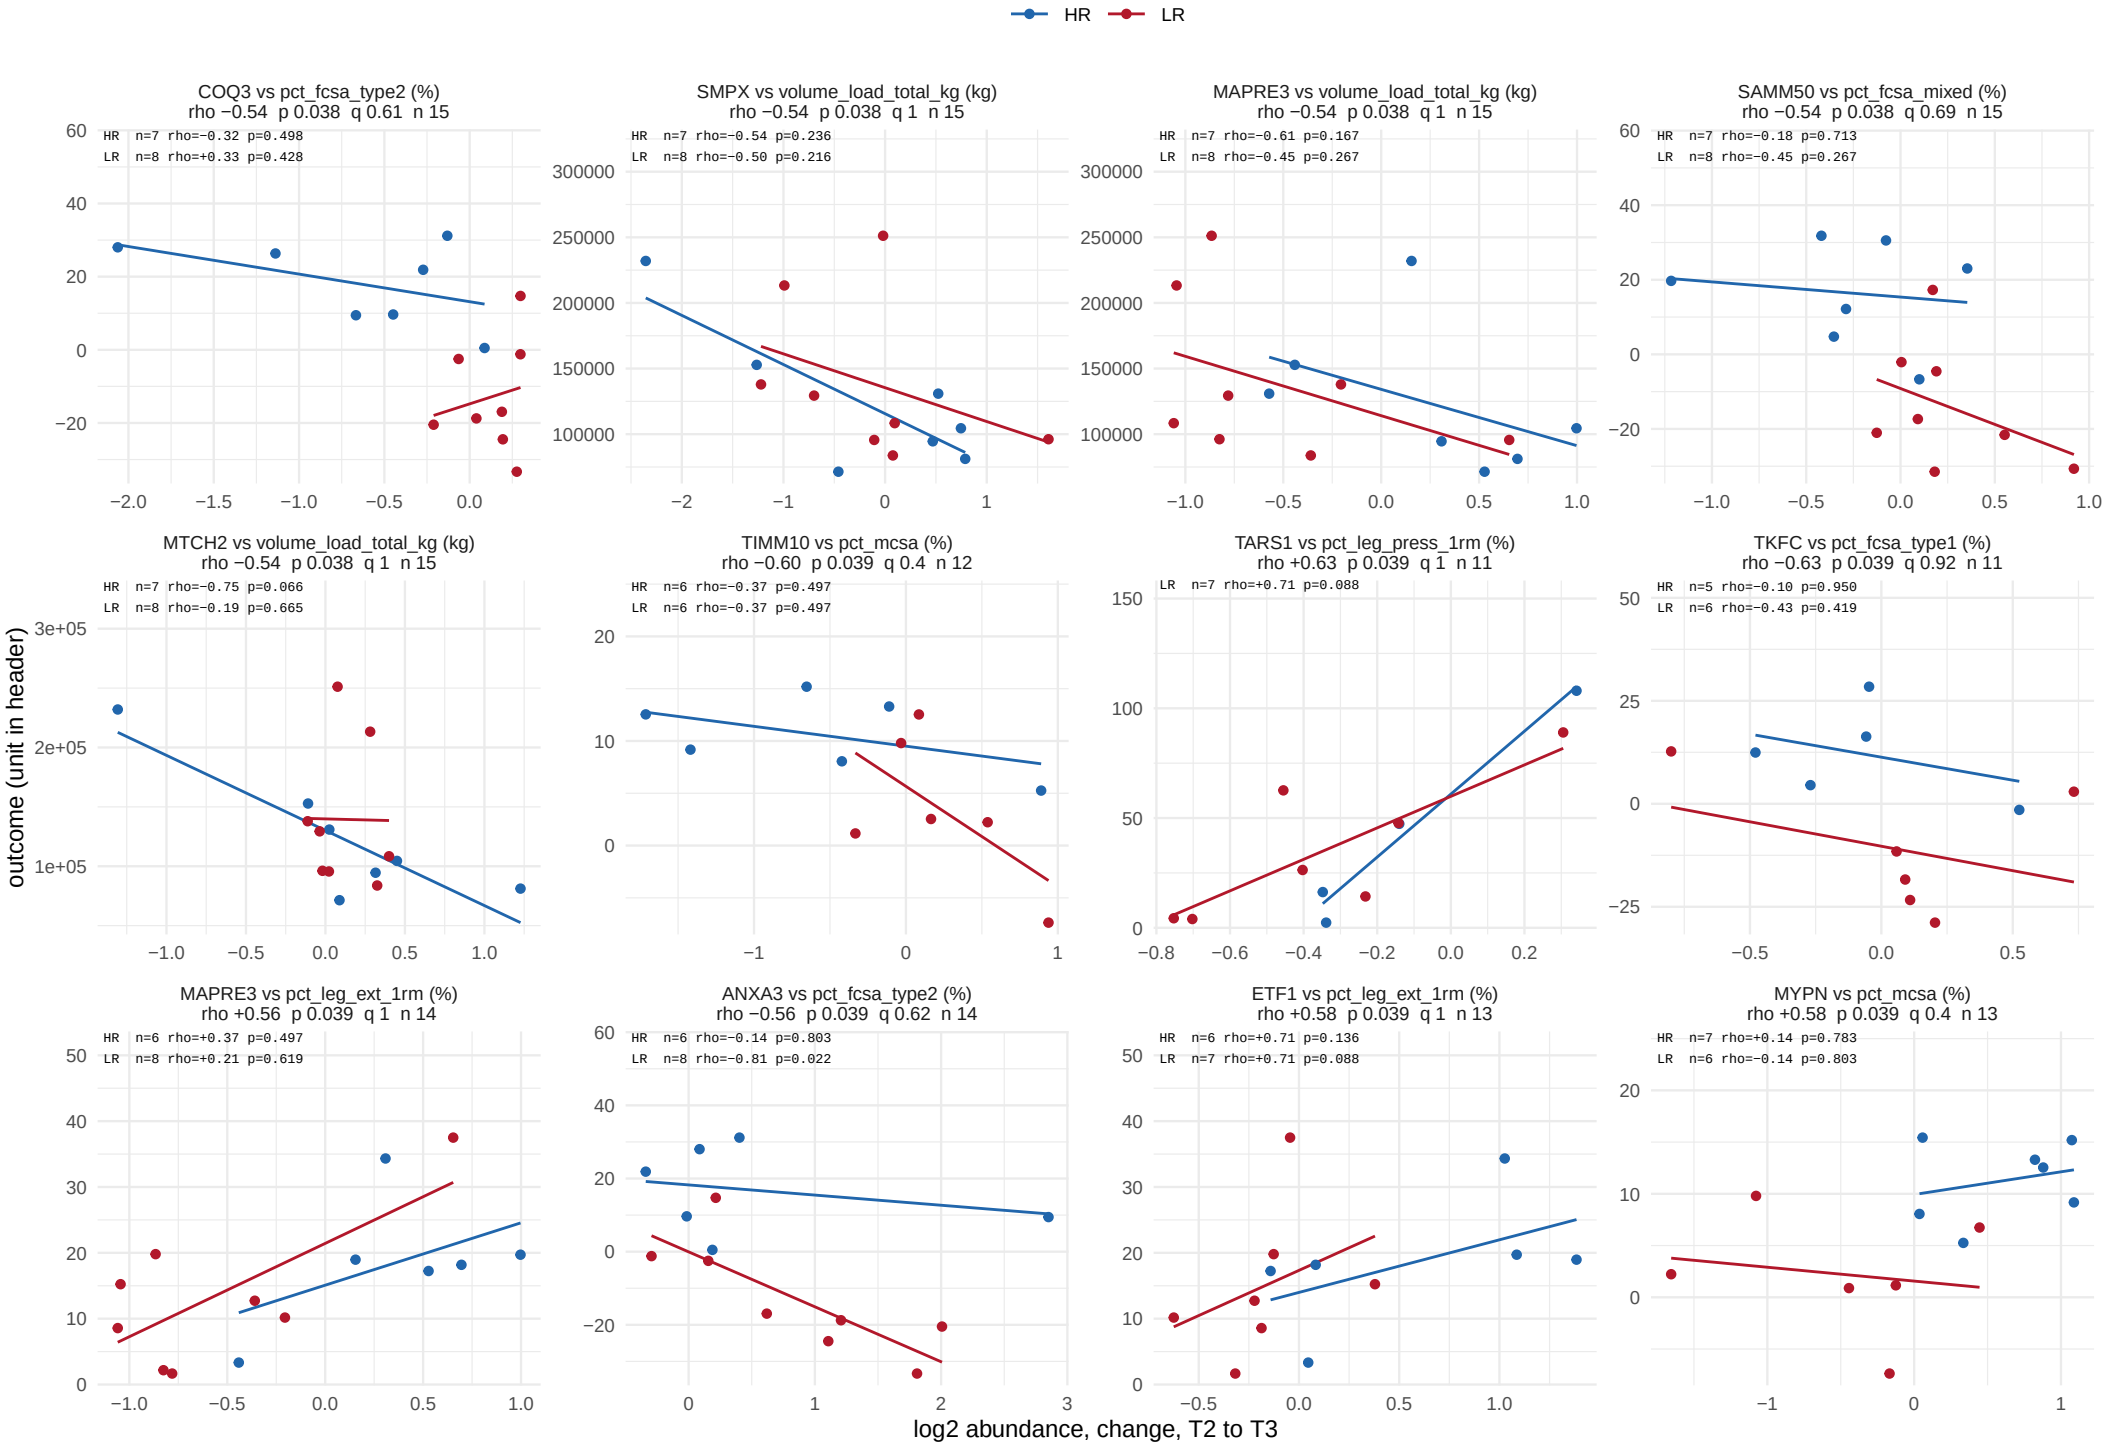

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


741 of 11747 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 51 of 62.

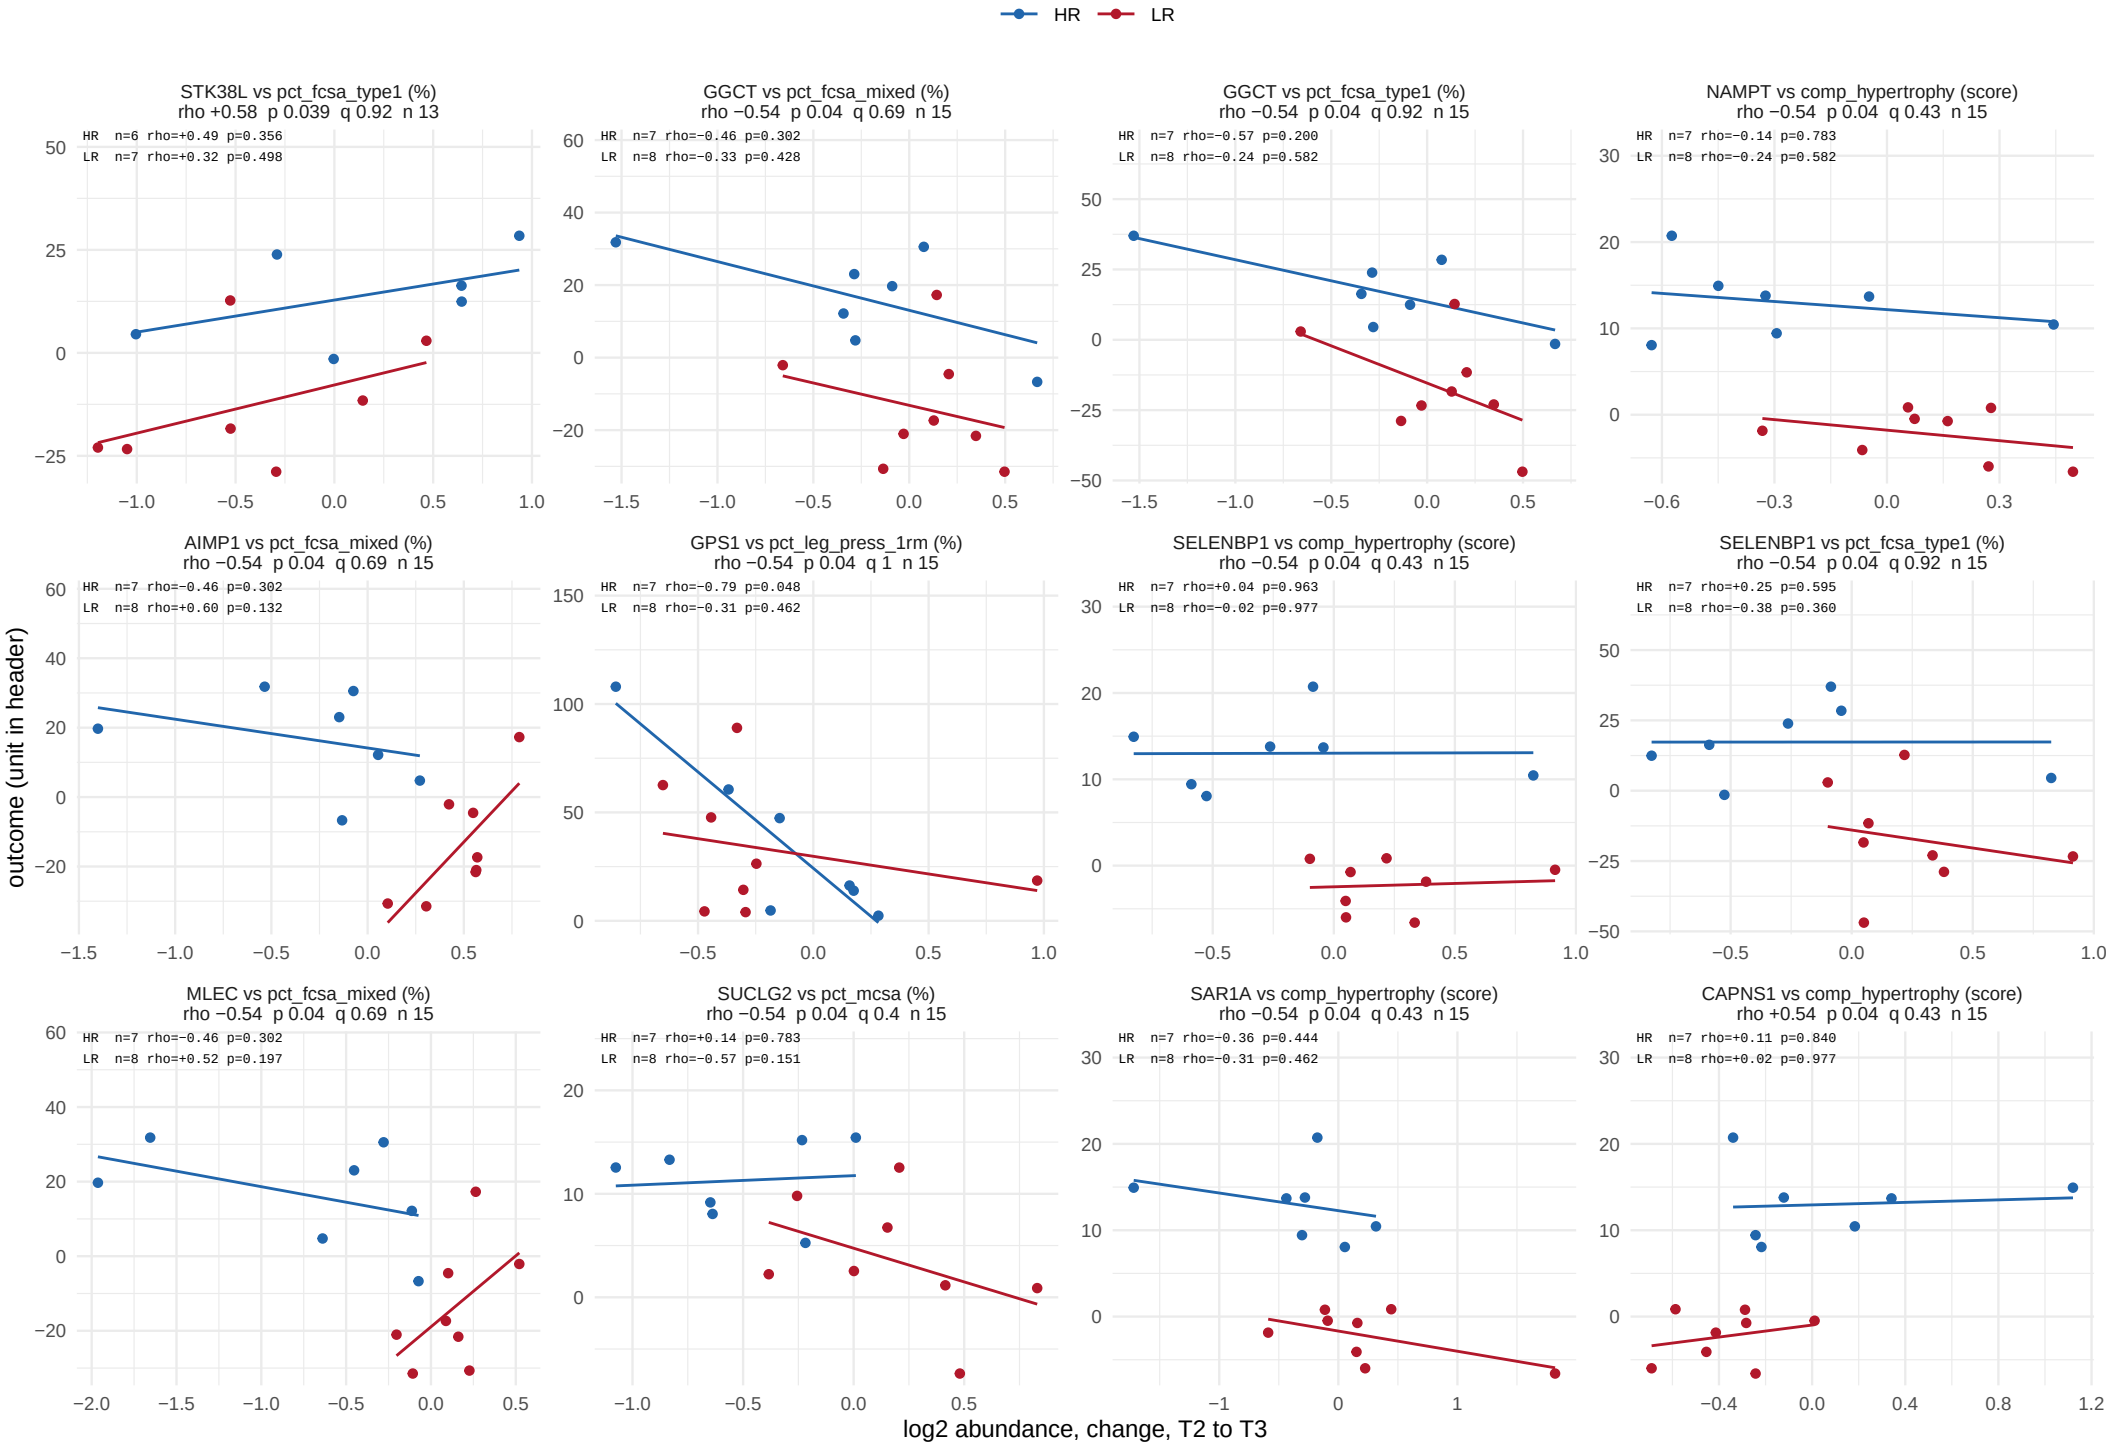

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


741 of 11747 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 52 of 62.

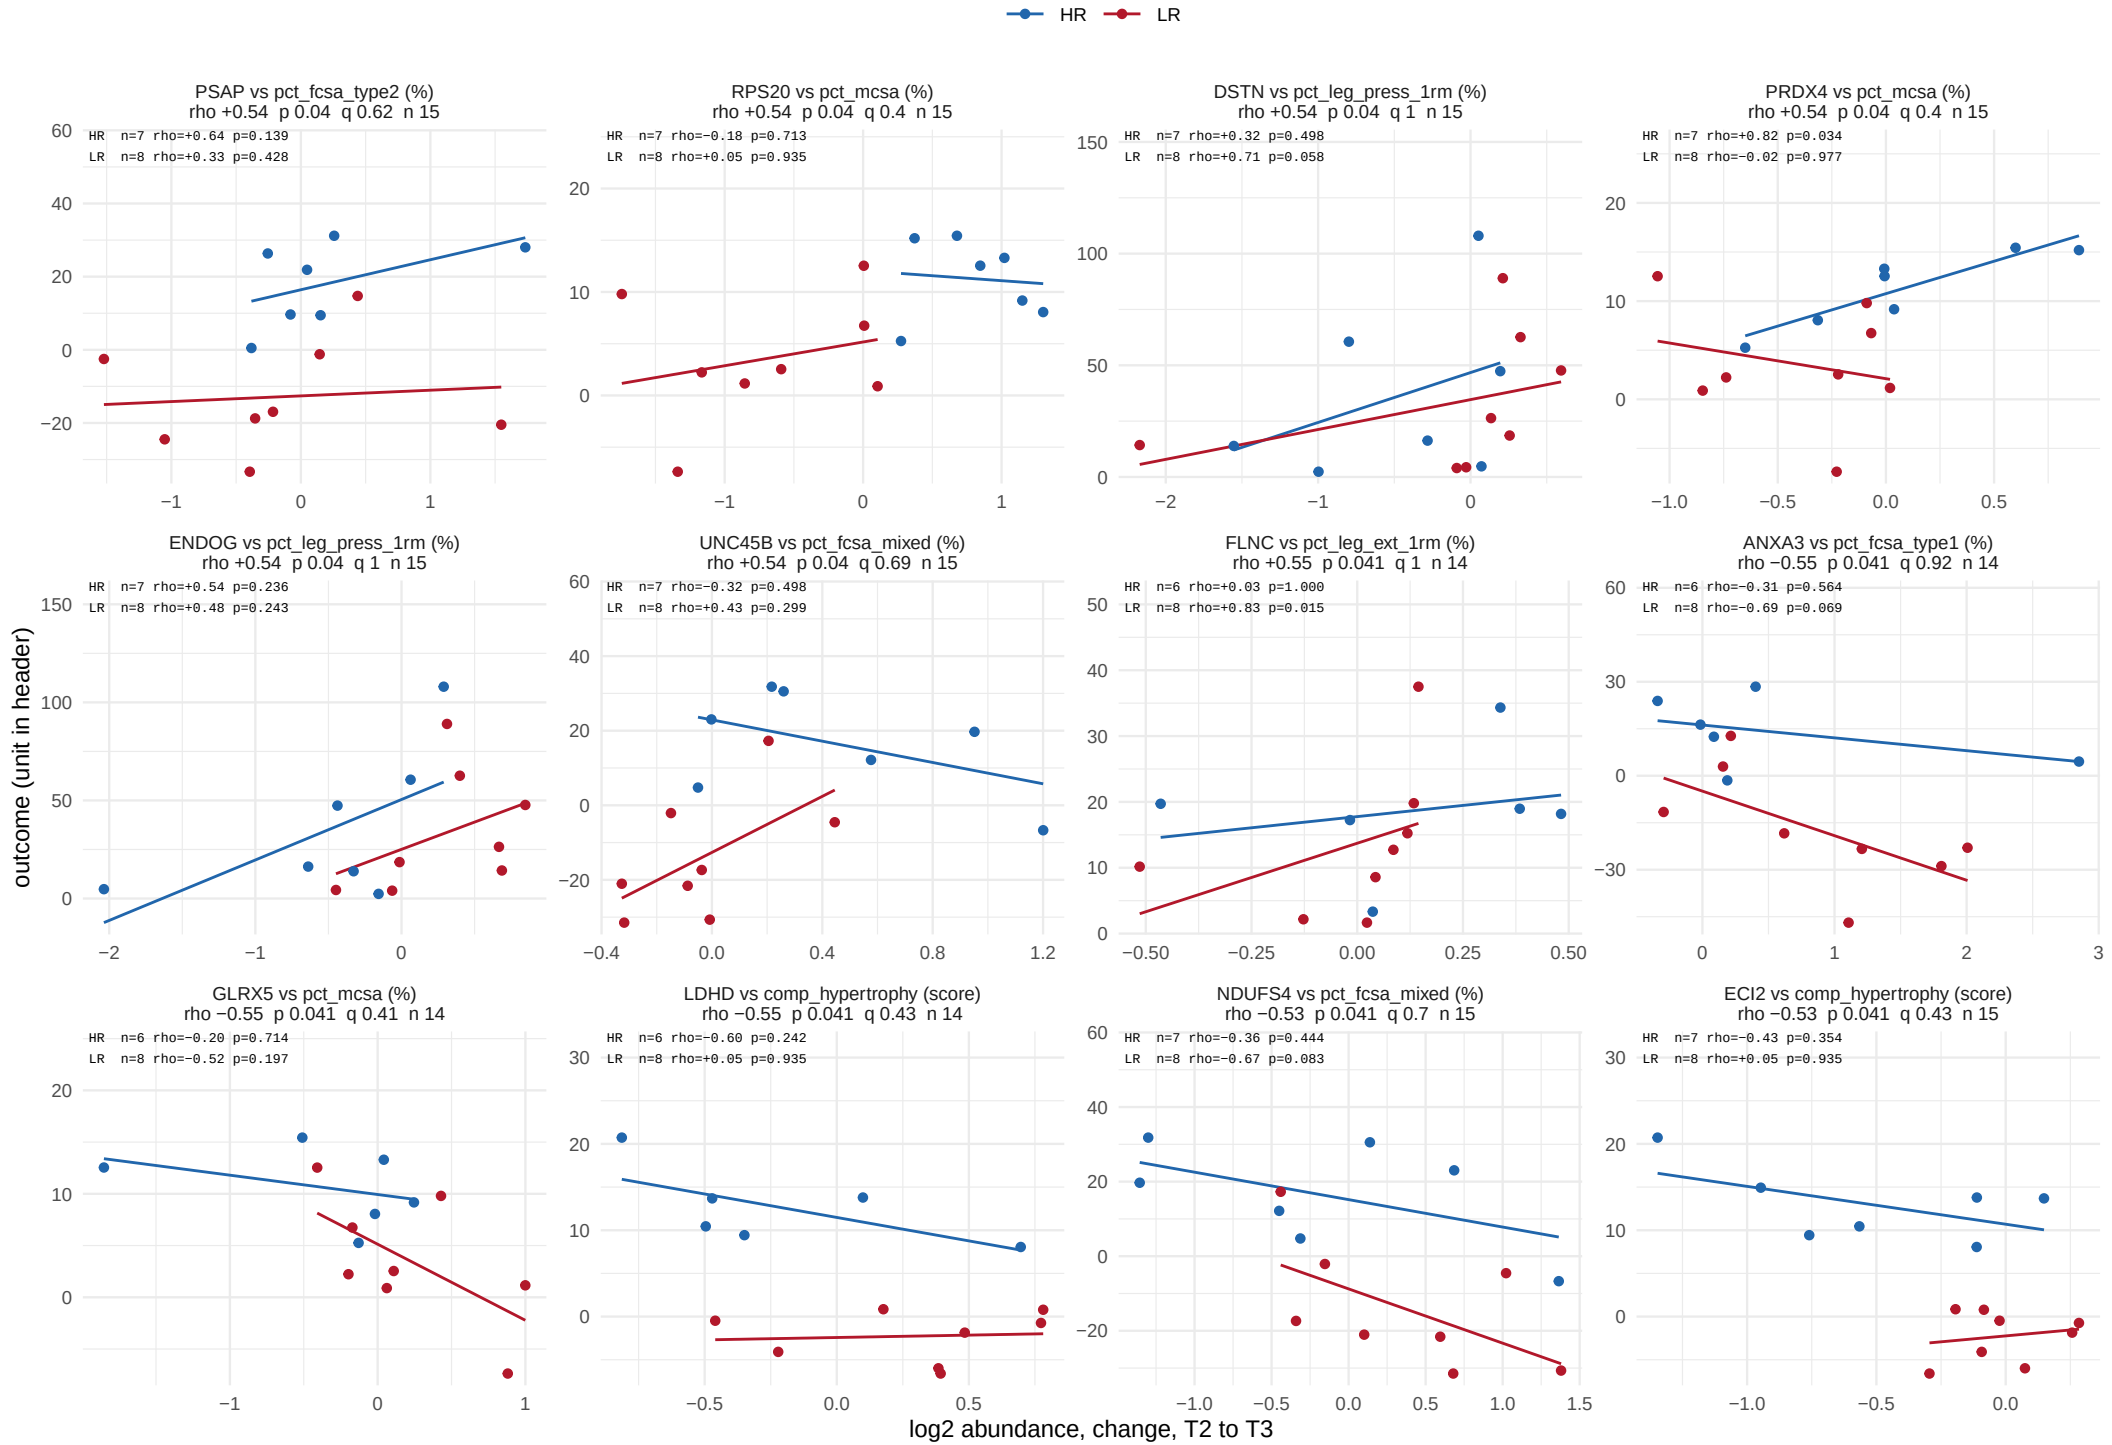

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


741 of 11747 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 53 of 62.

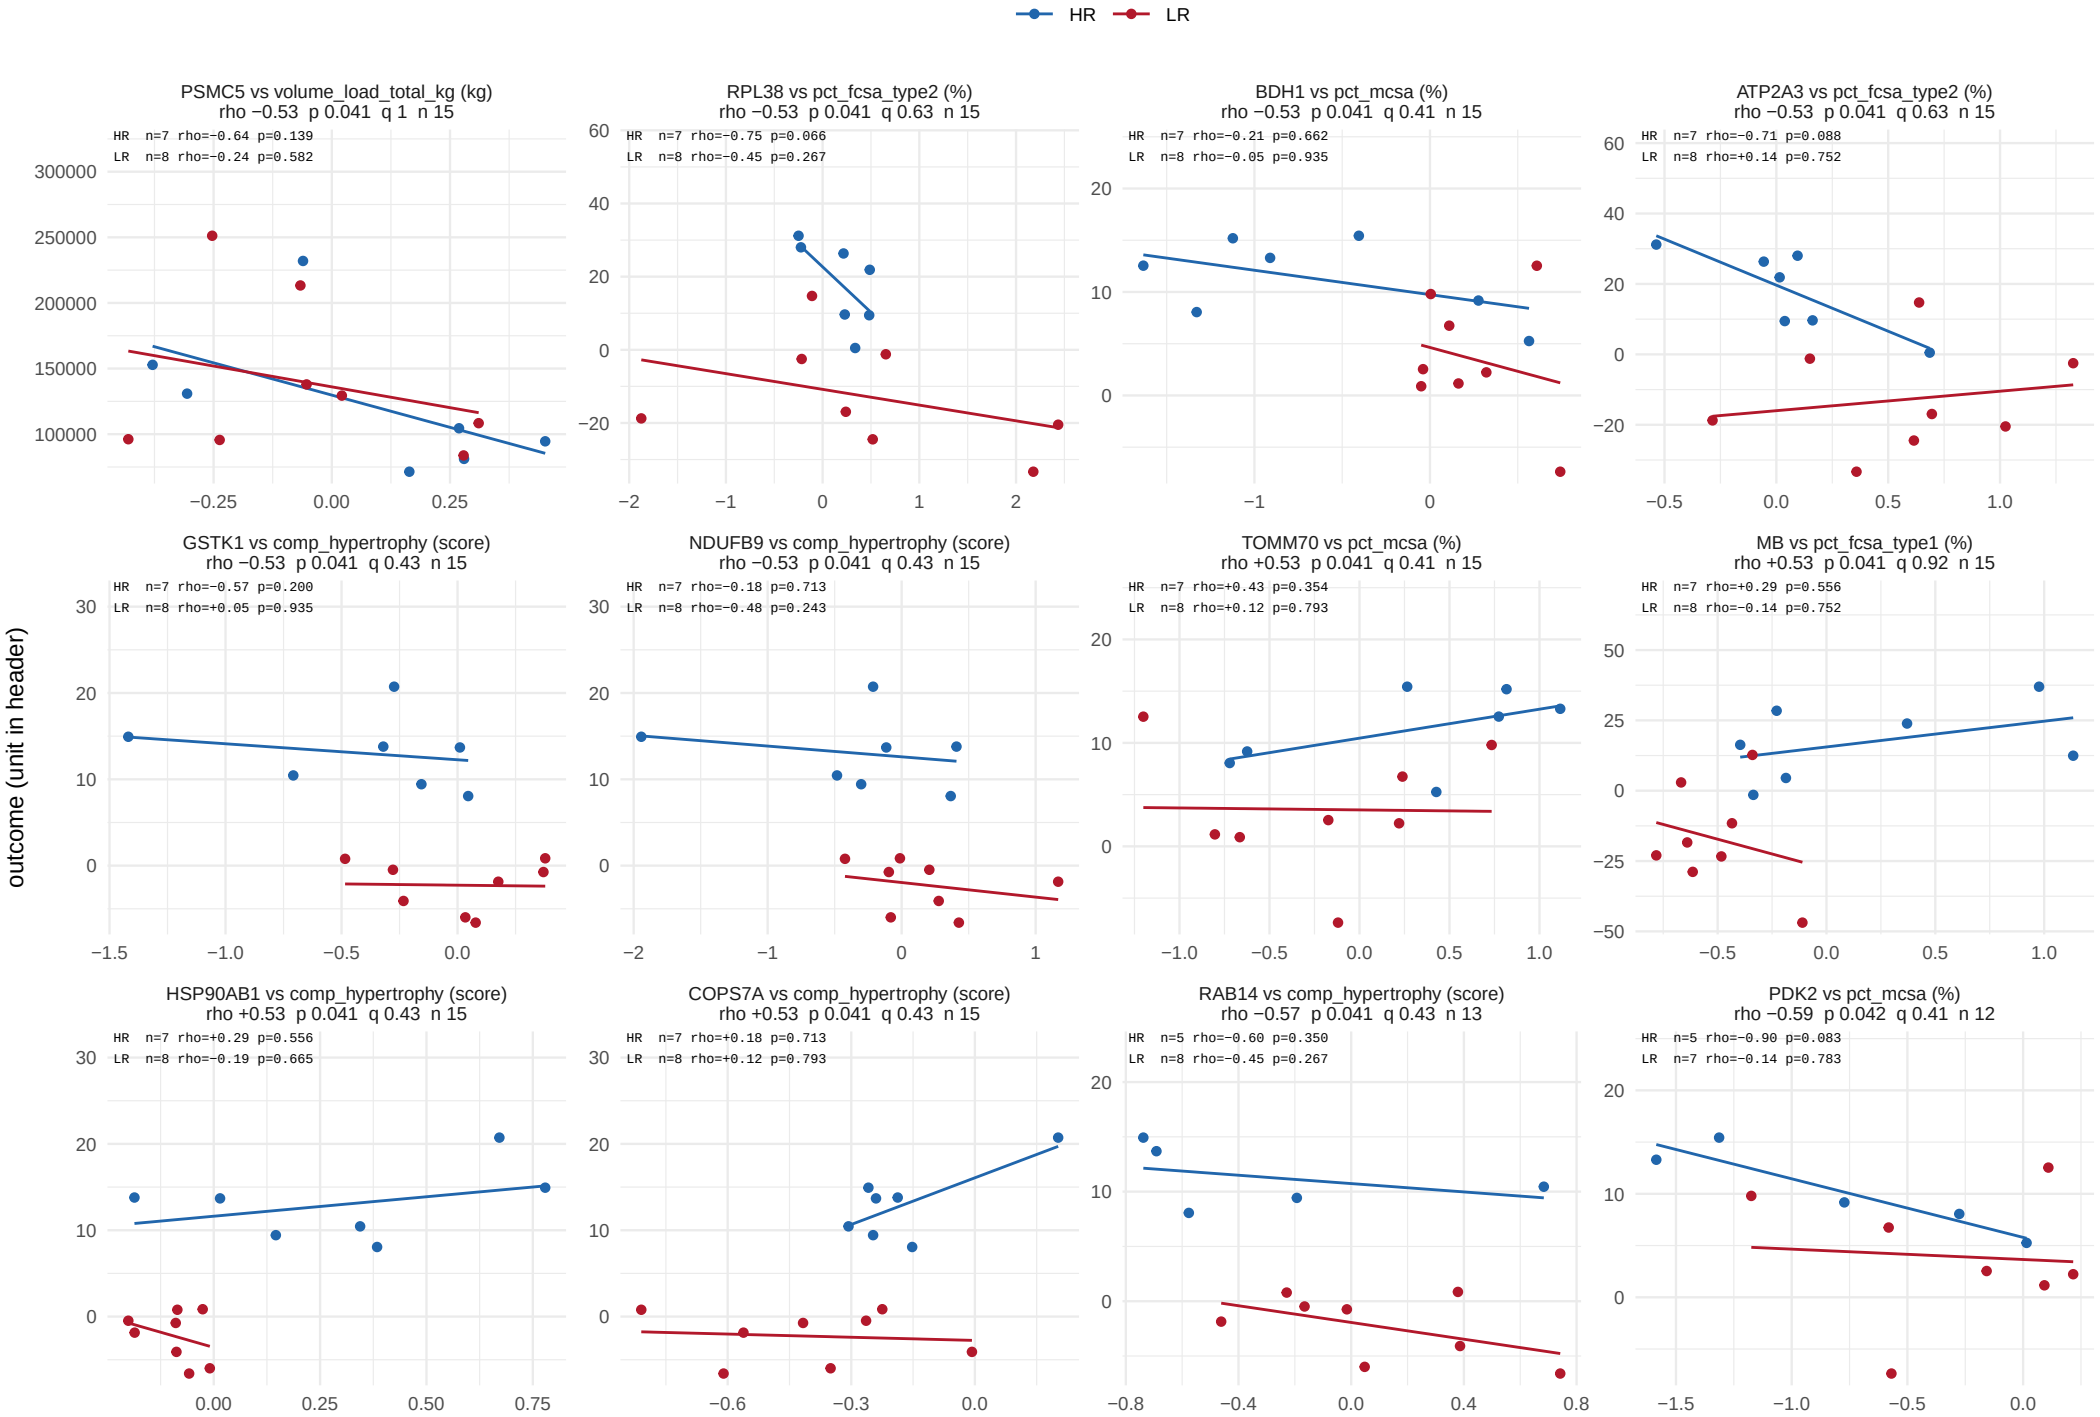

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


741 of 11747 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 54 of 62.

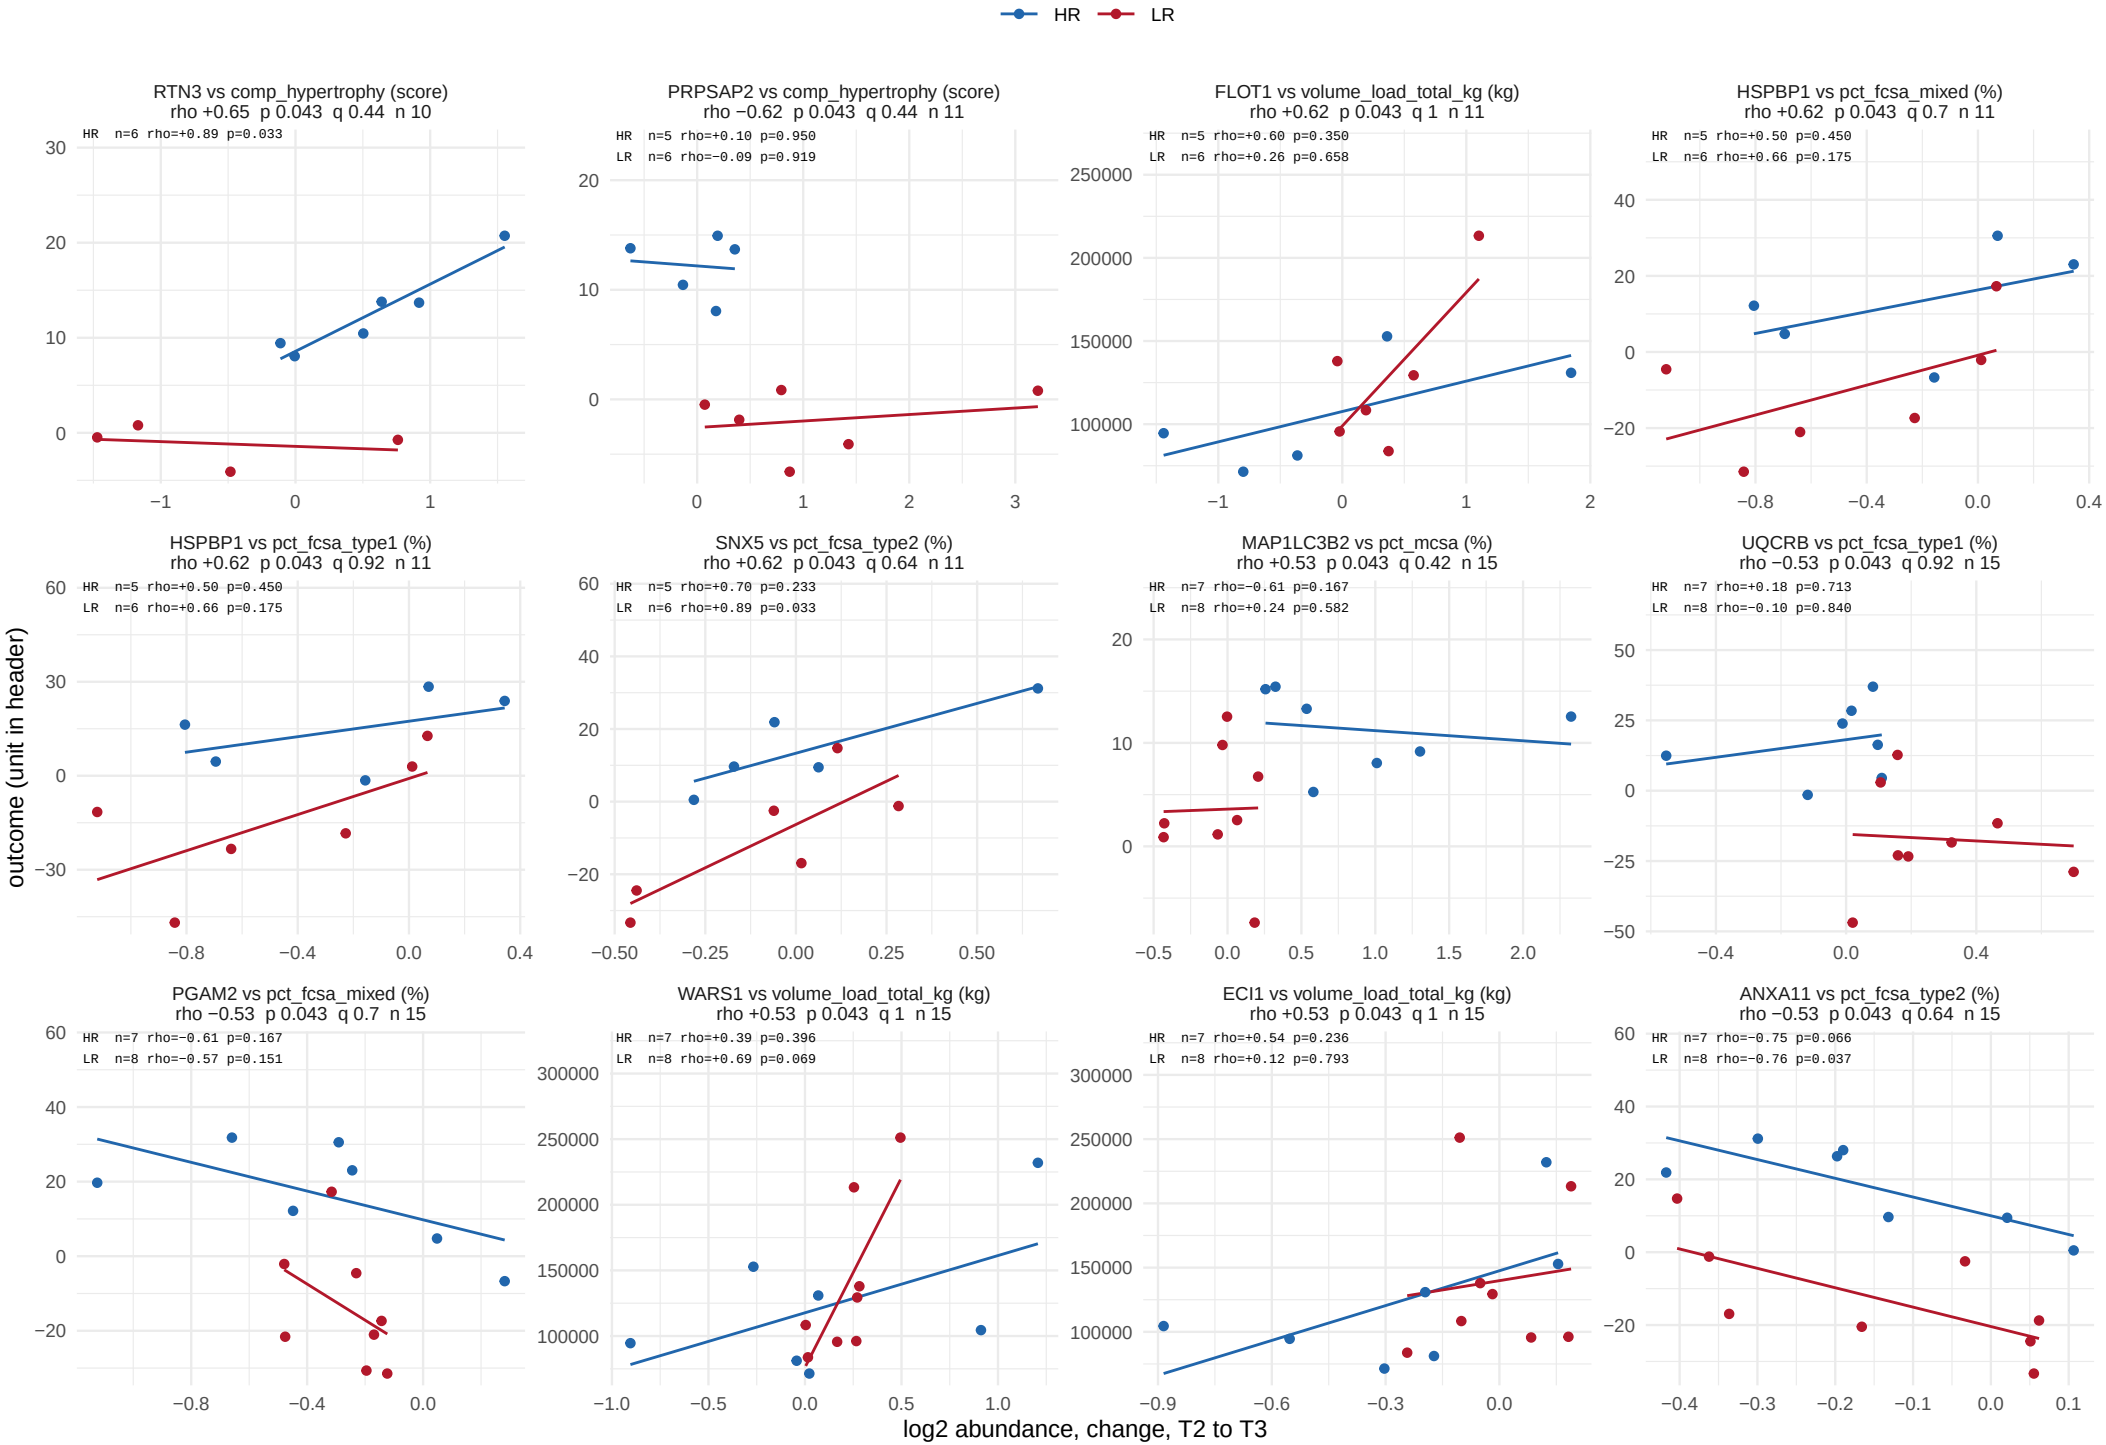

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


741 of 11747 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 55 of 62.

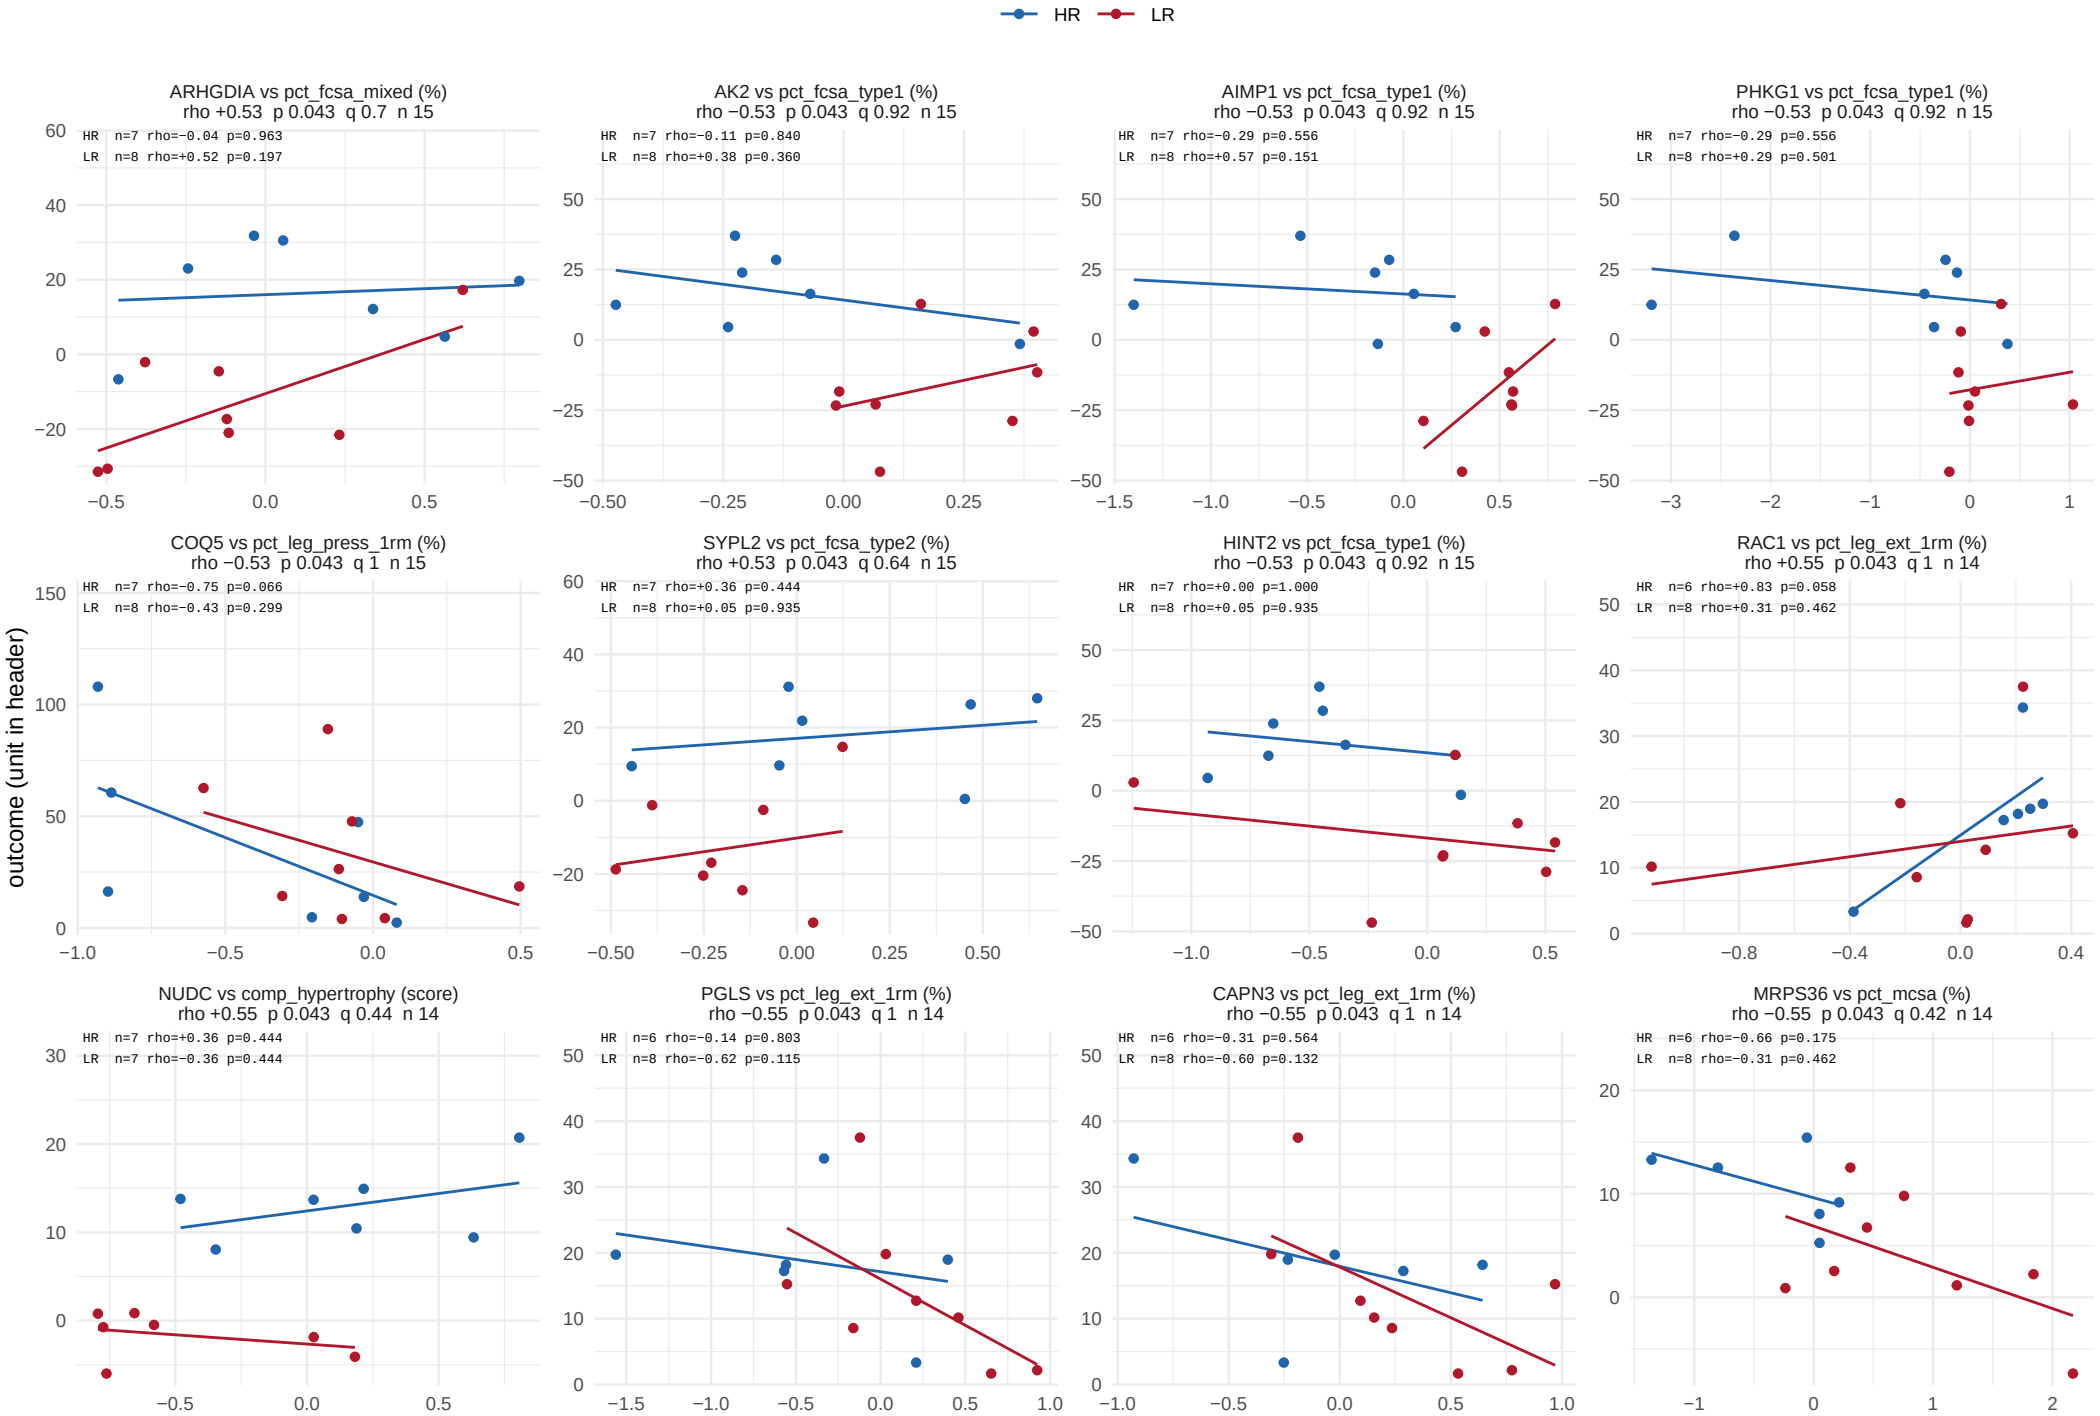

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


741 of 11747 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 56 of 62.

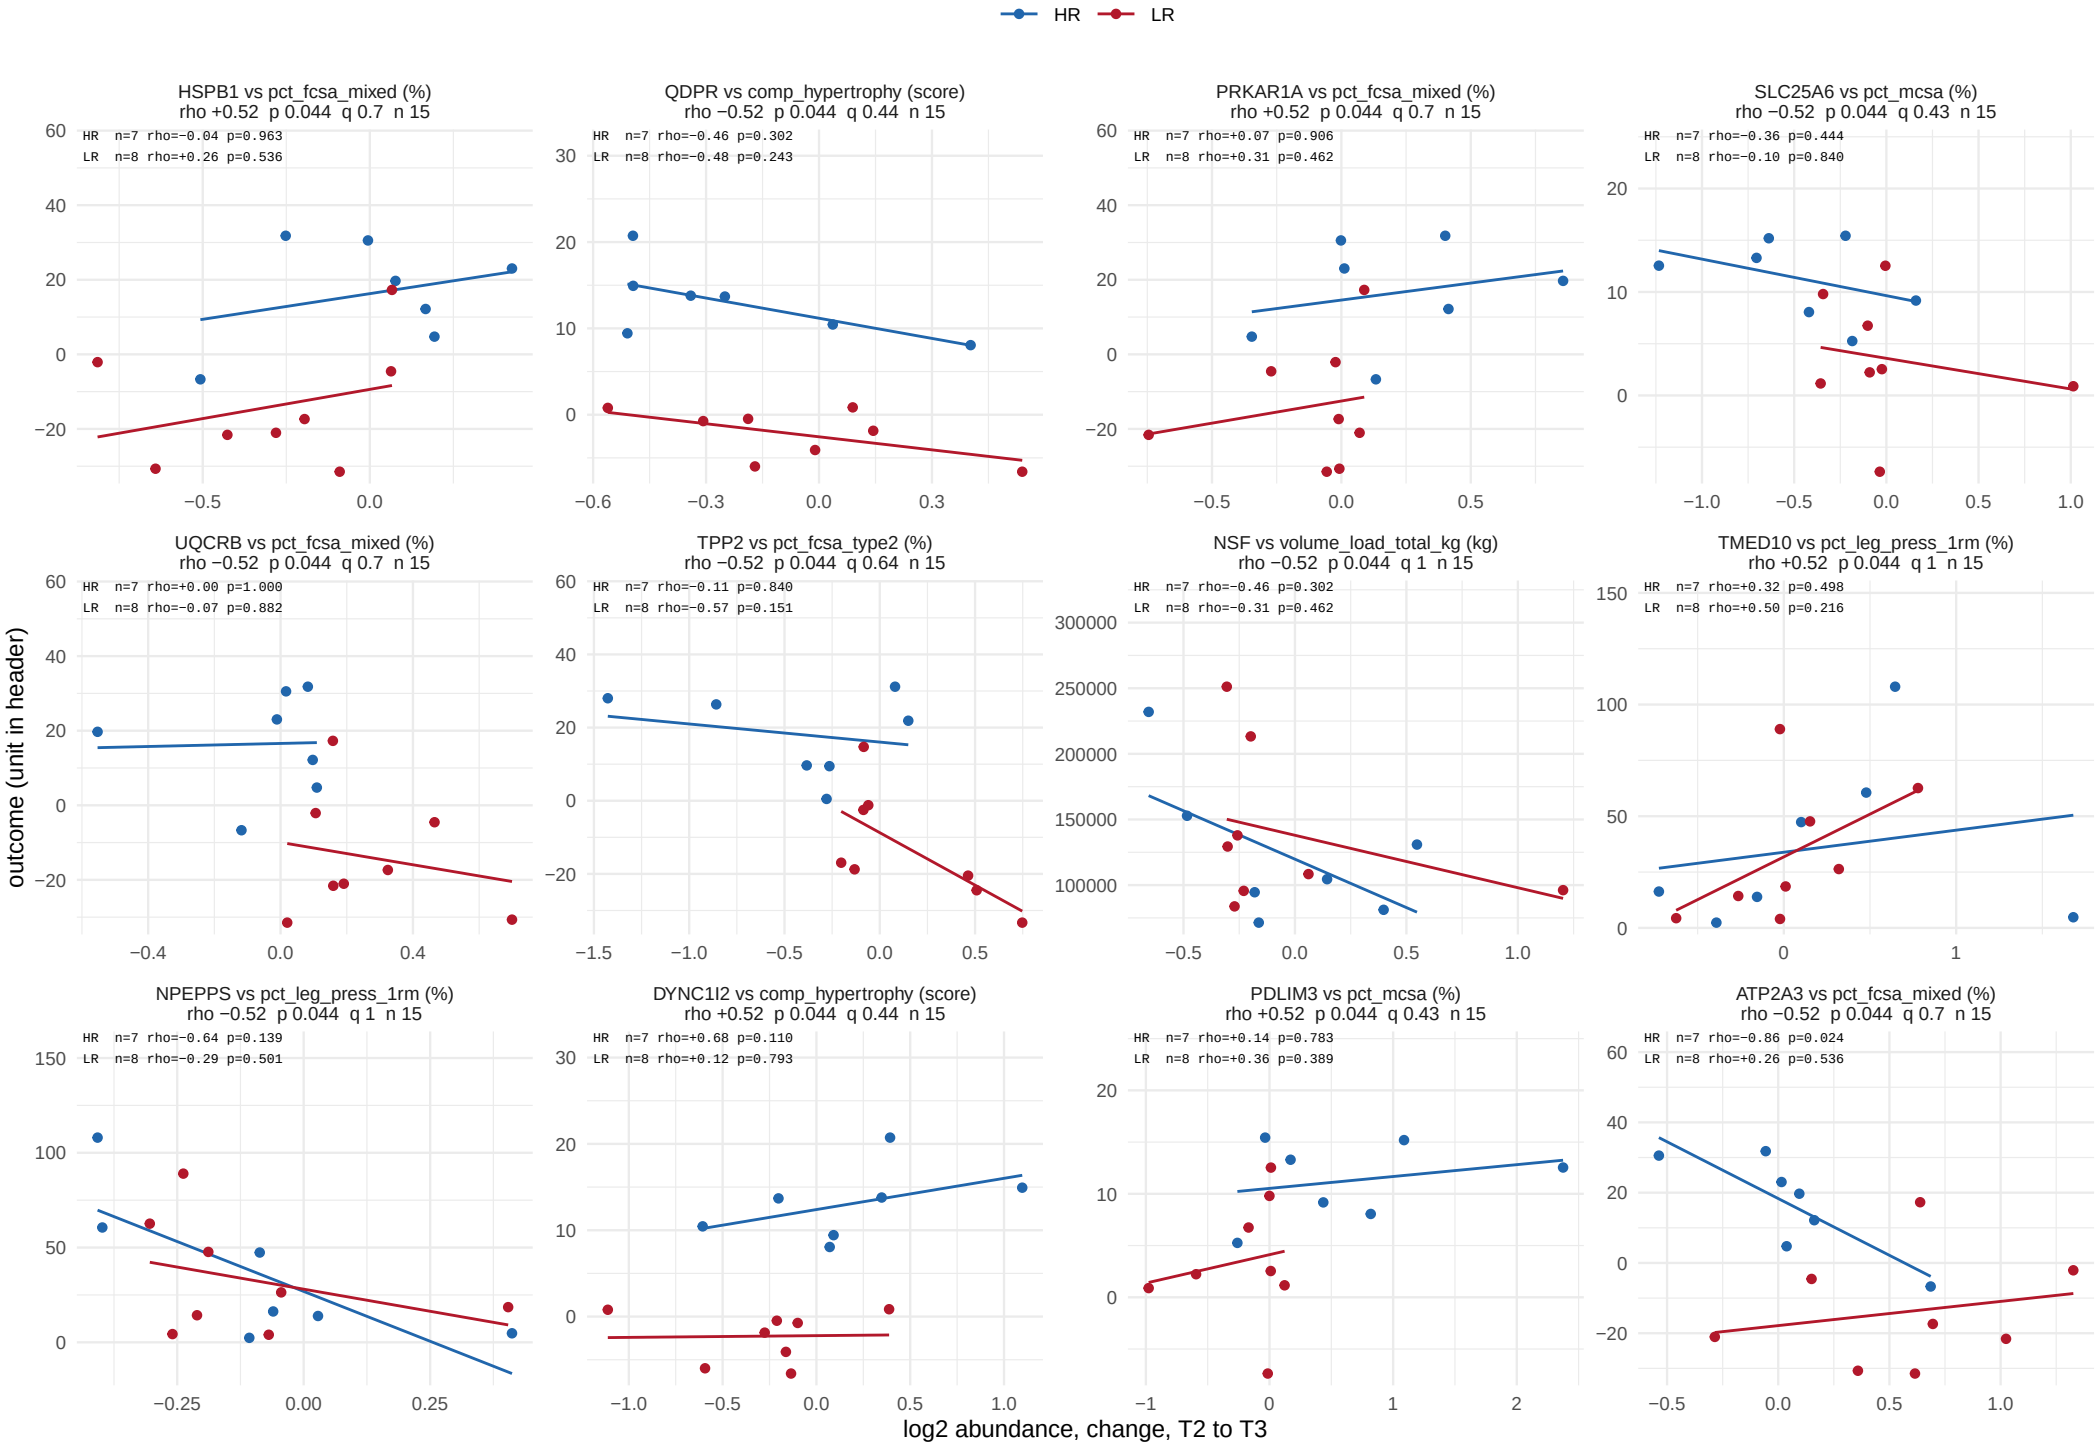

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


741 of 11747 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 57 of 62.

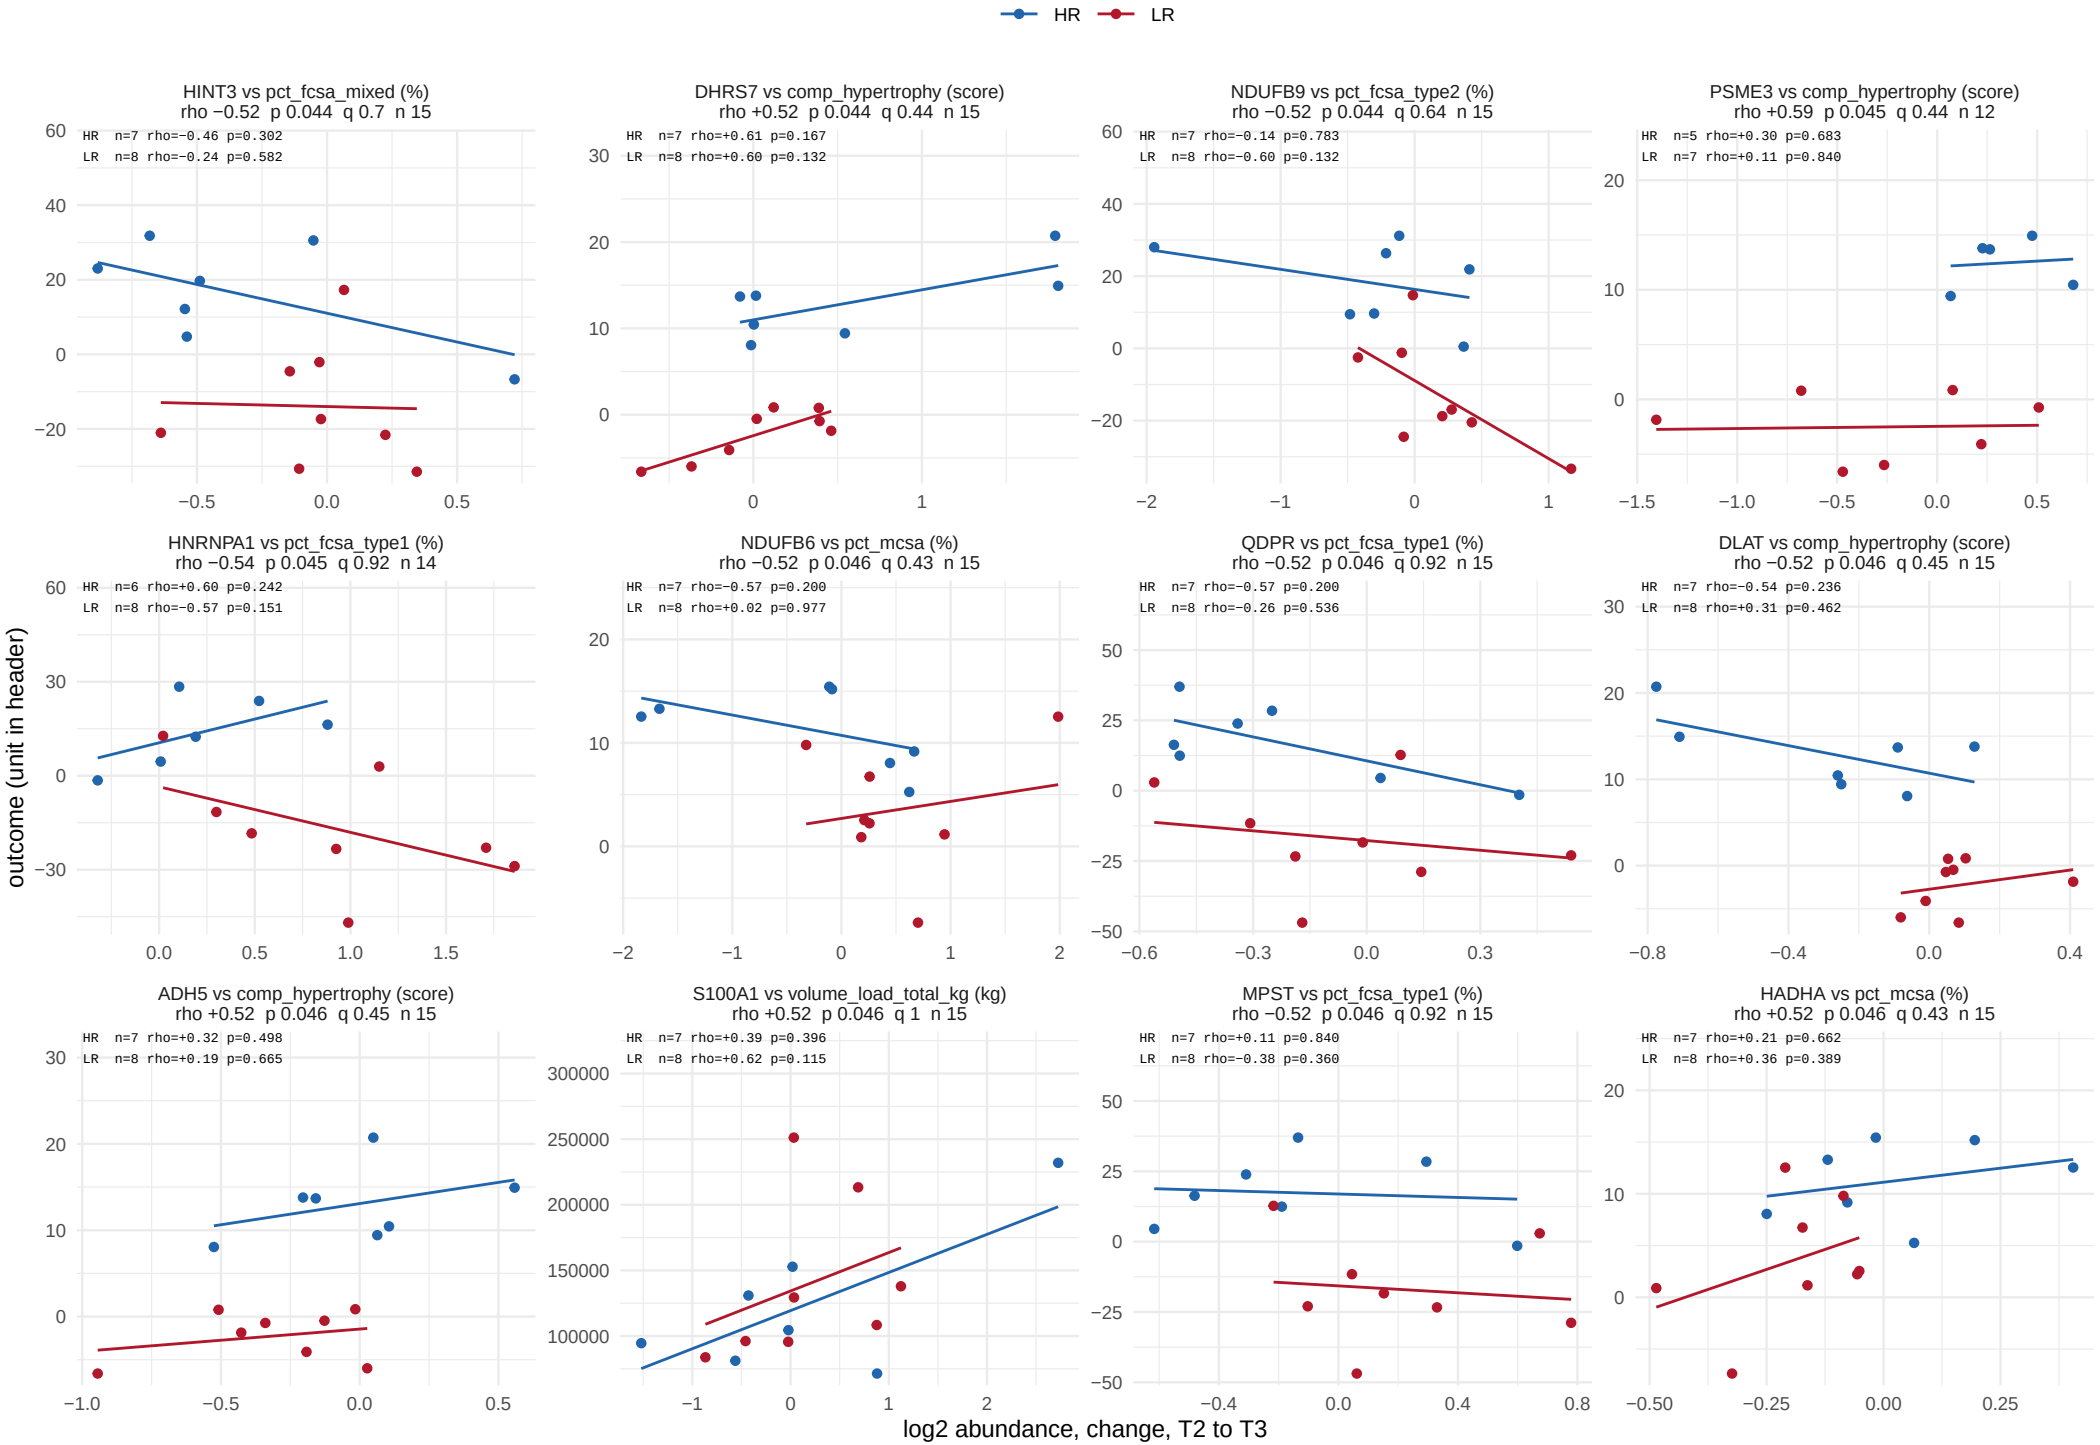

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


741 of 11747 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 58 of 62.

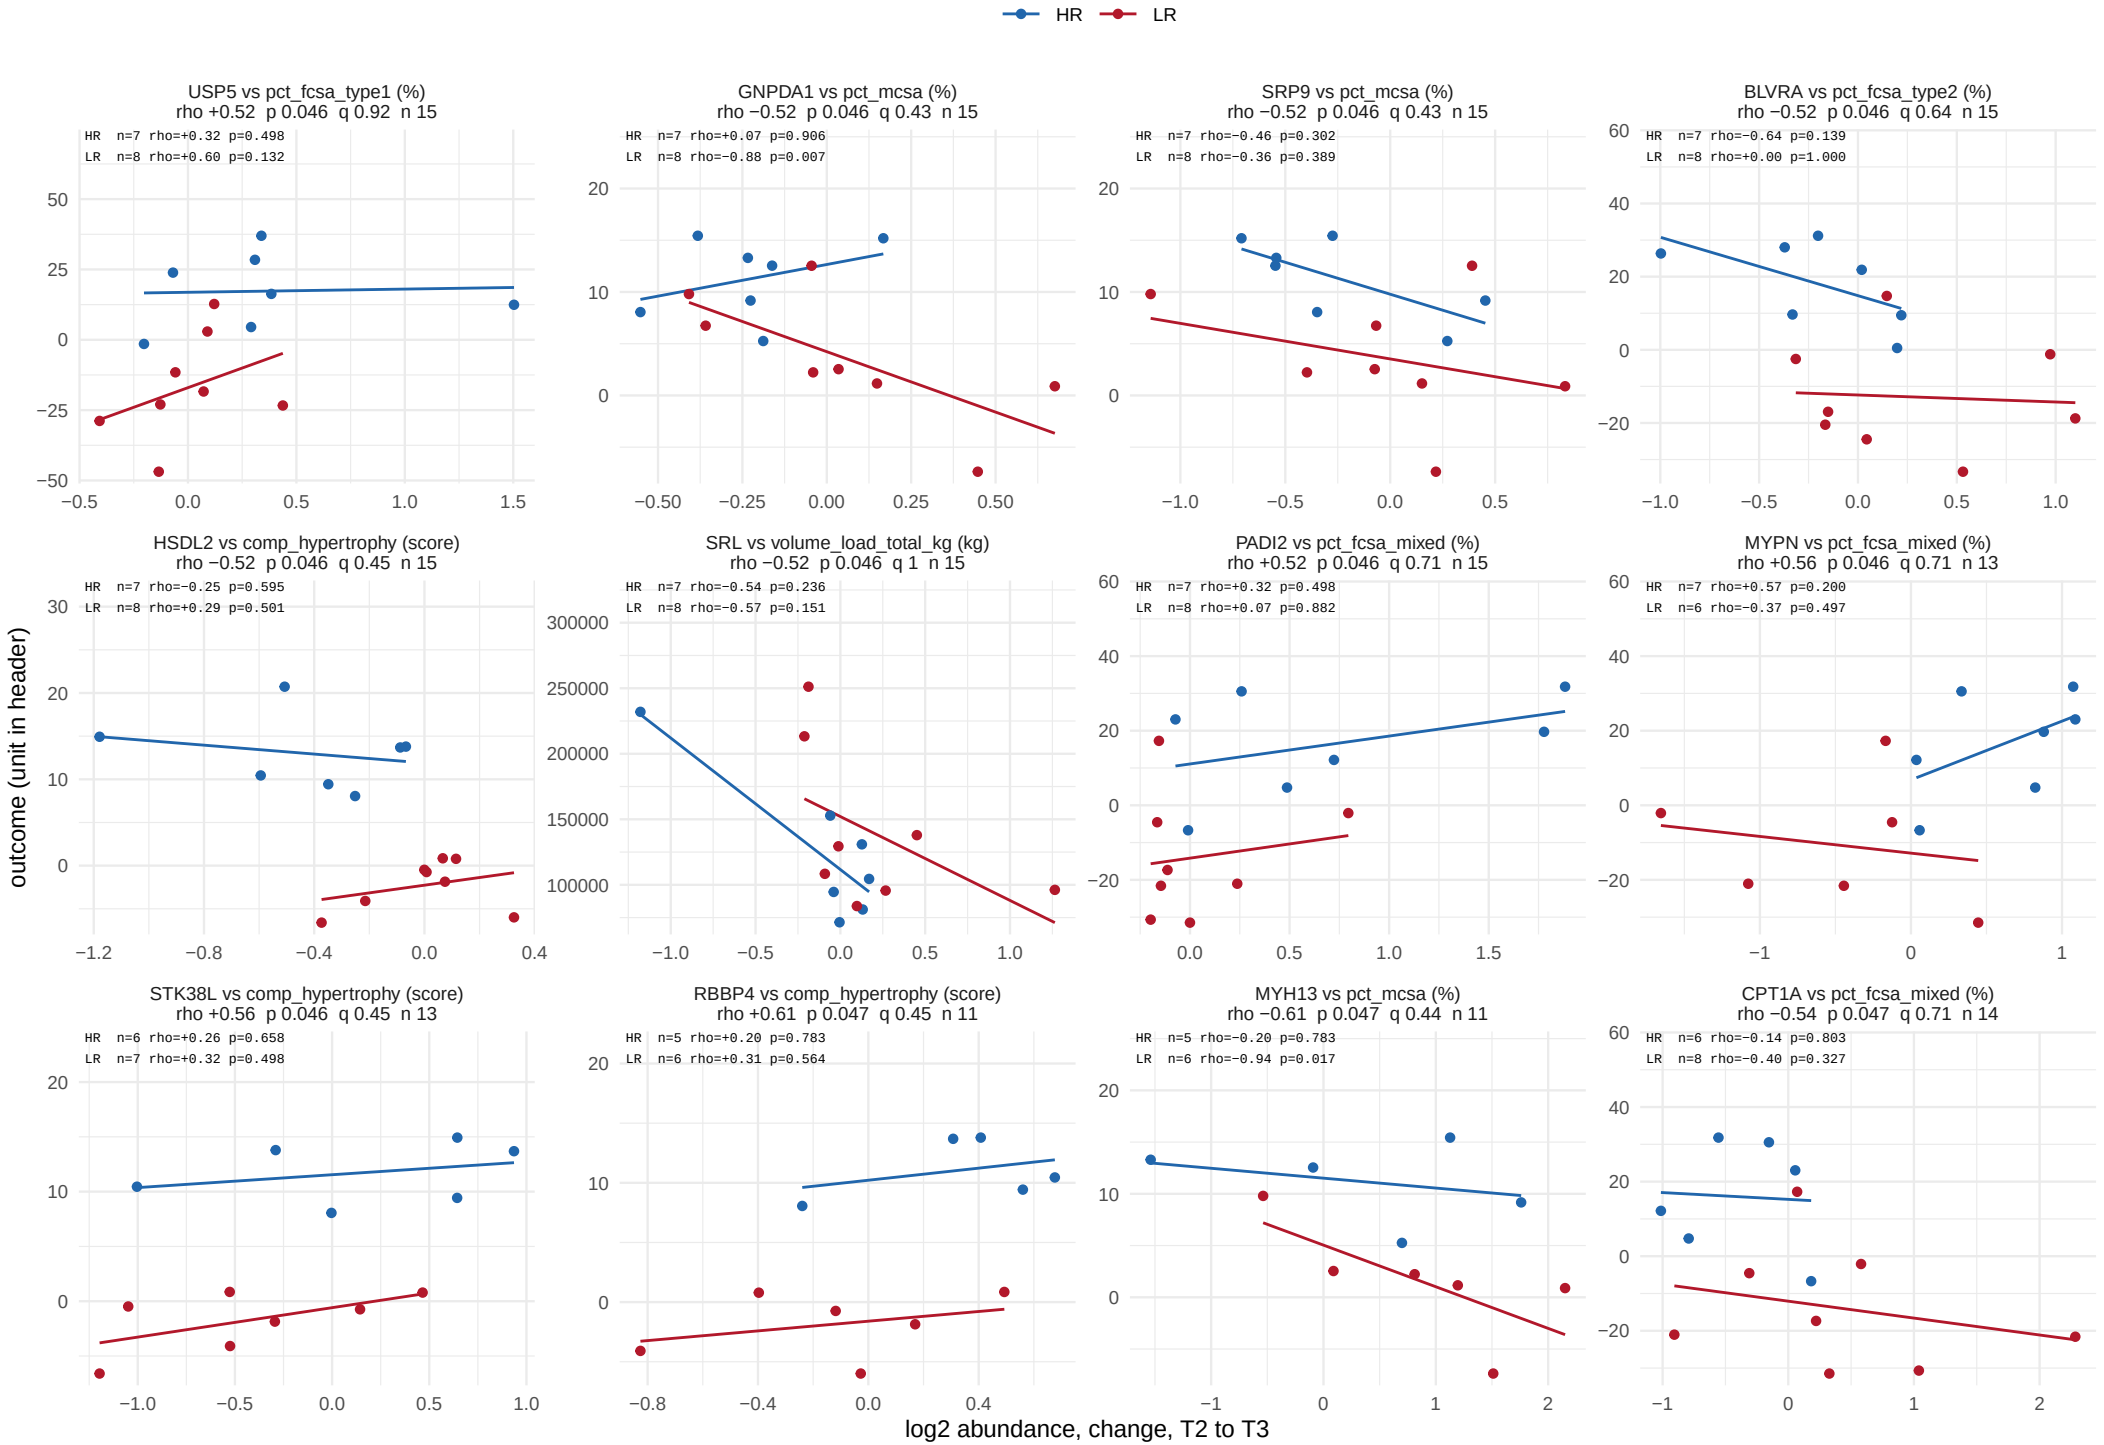

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


741 of 11747 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 59 of 62.

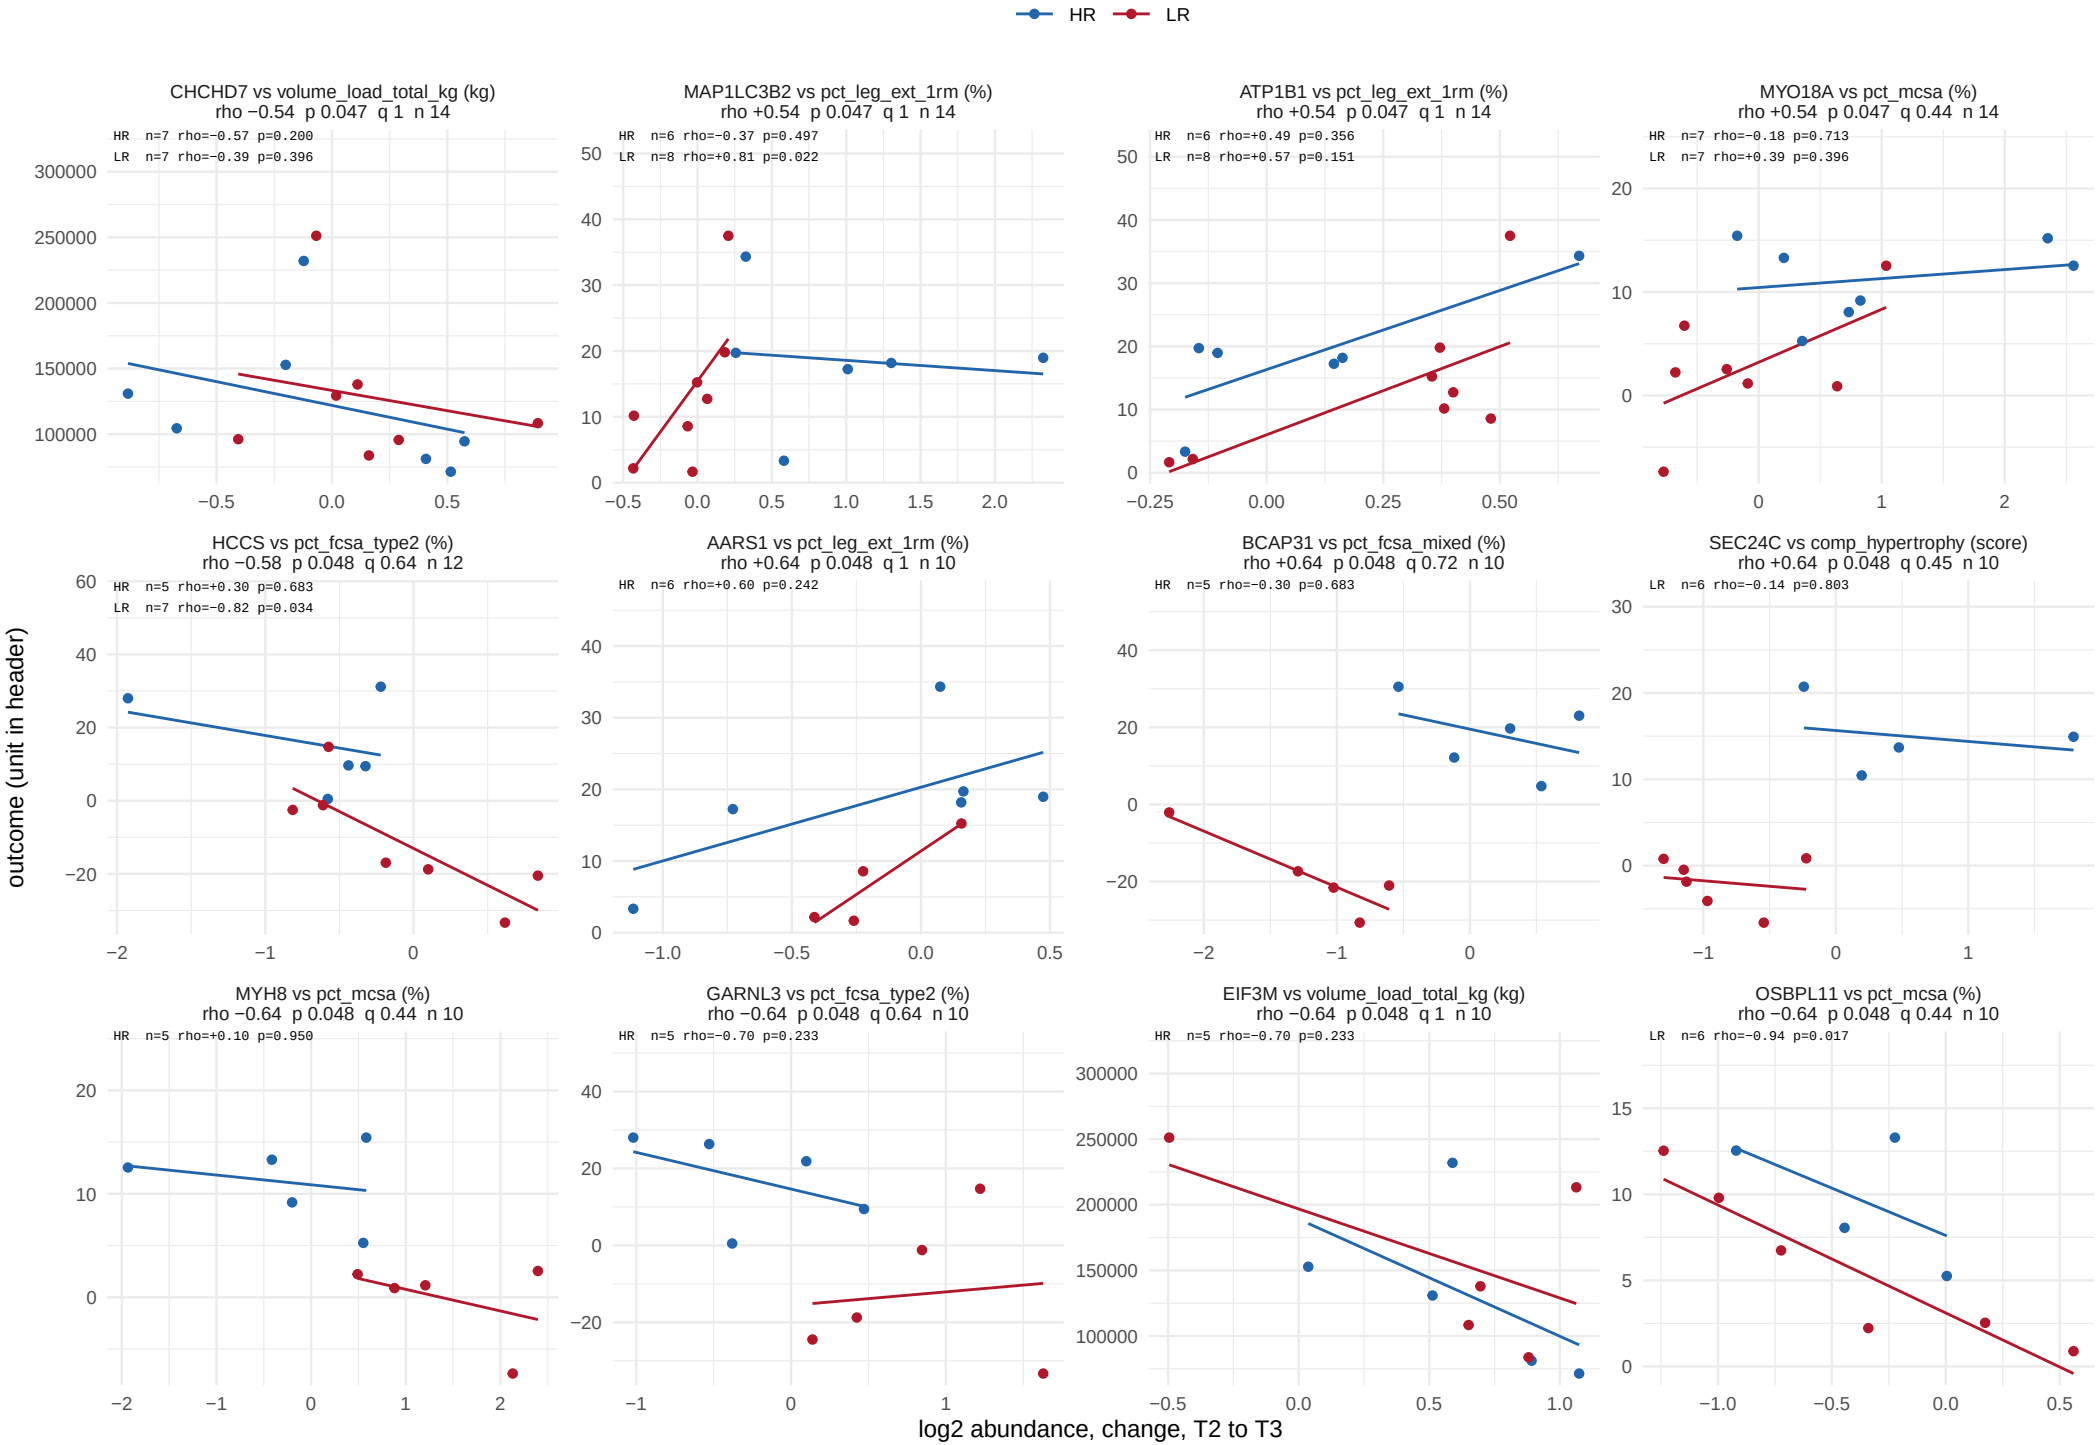

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


741 of 11747 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 60 of 62.

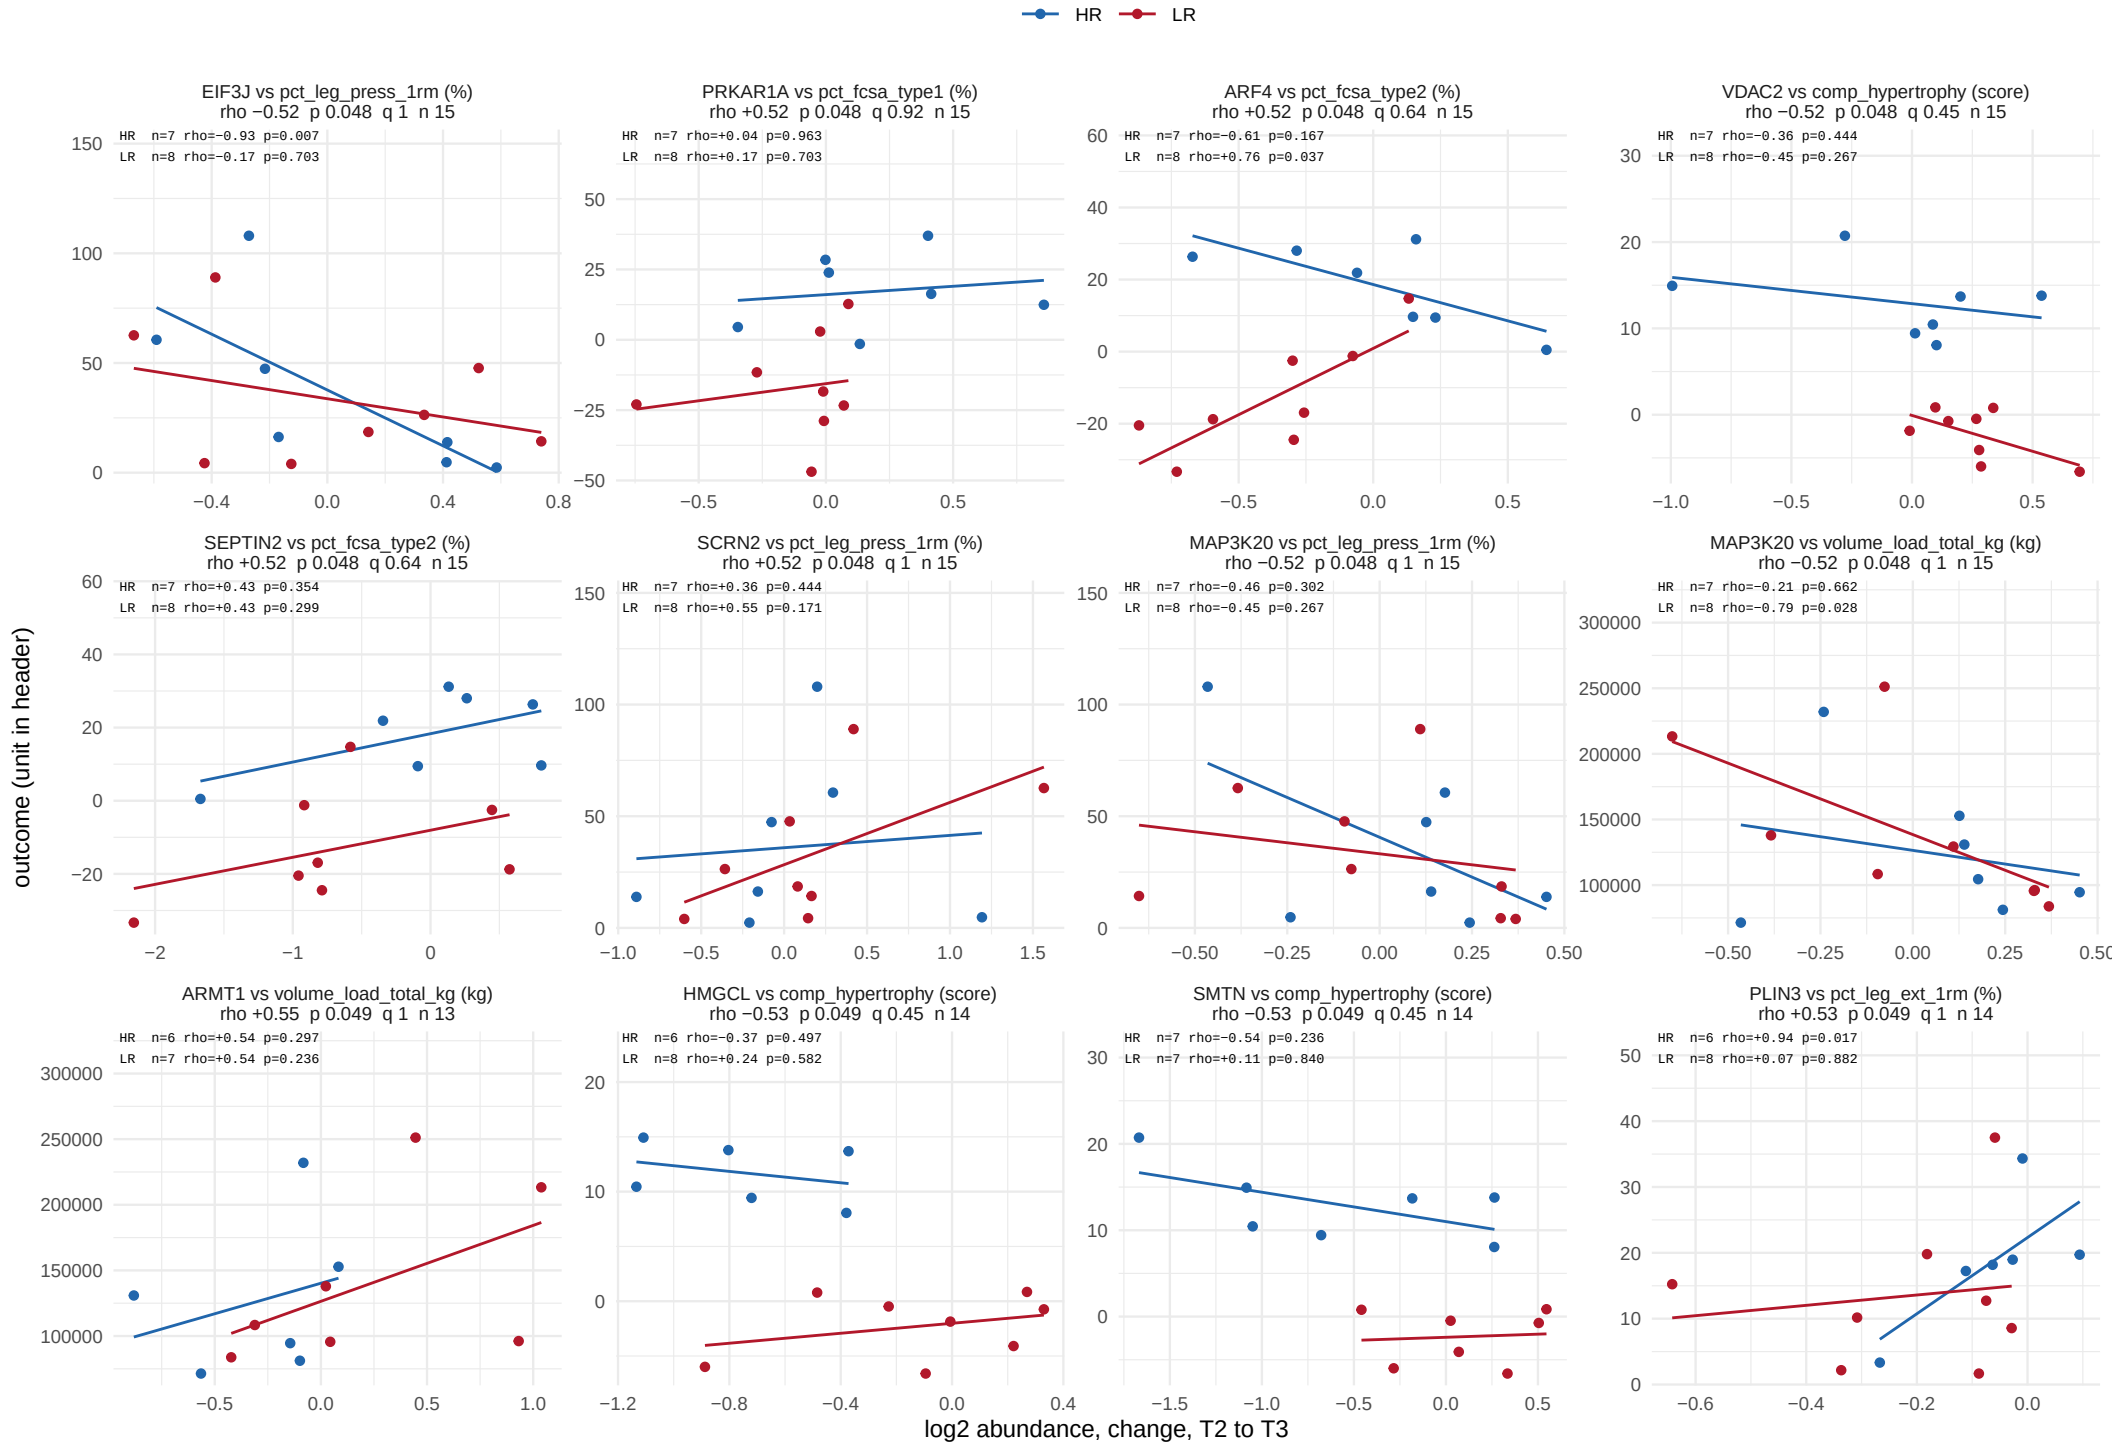

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


741 of 11747 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 61 of 62.

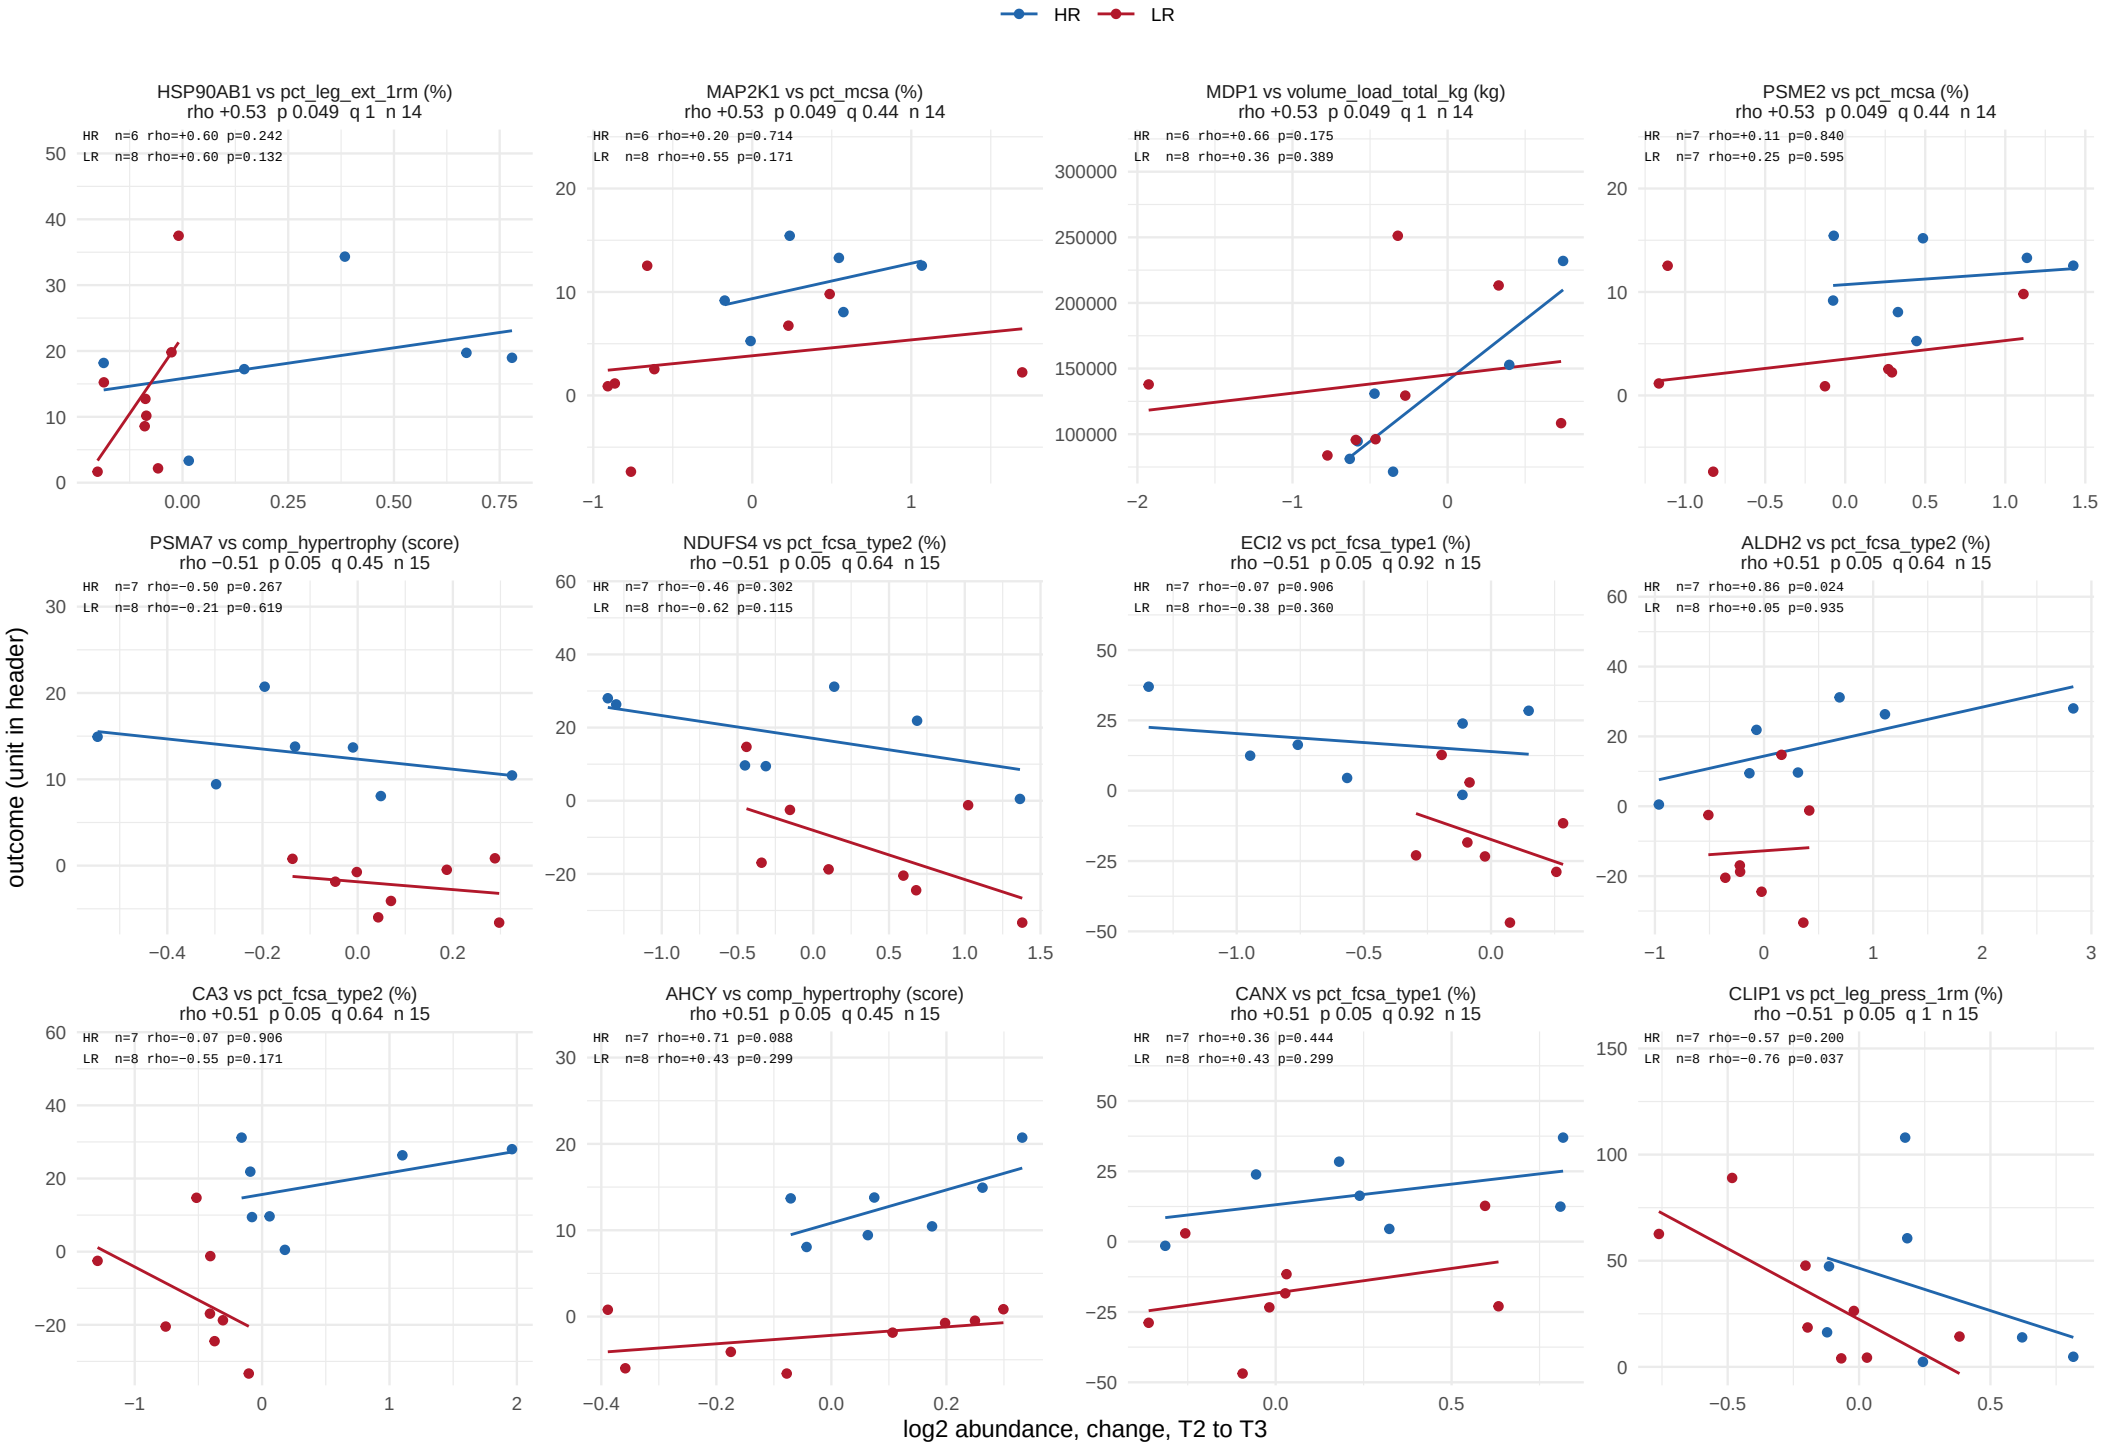

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


741 of 11747 feature−outcome pairs at p < 0.05, 3 at BH < 0.05. Page 62 of 62.

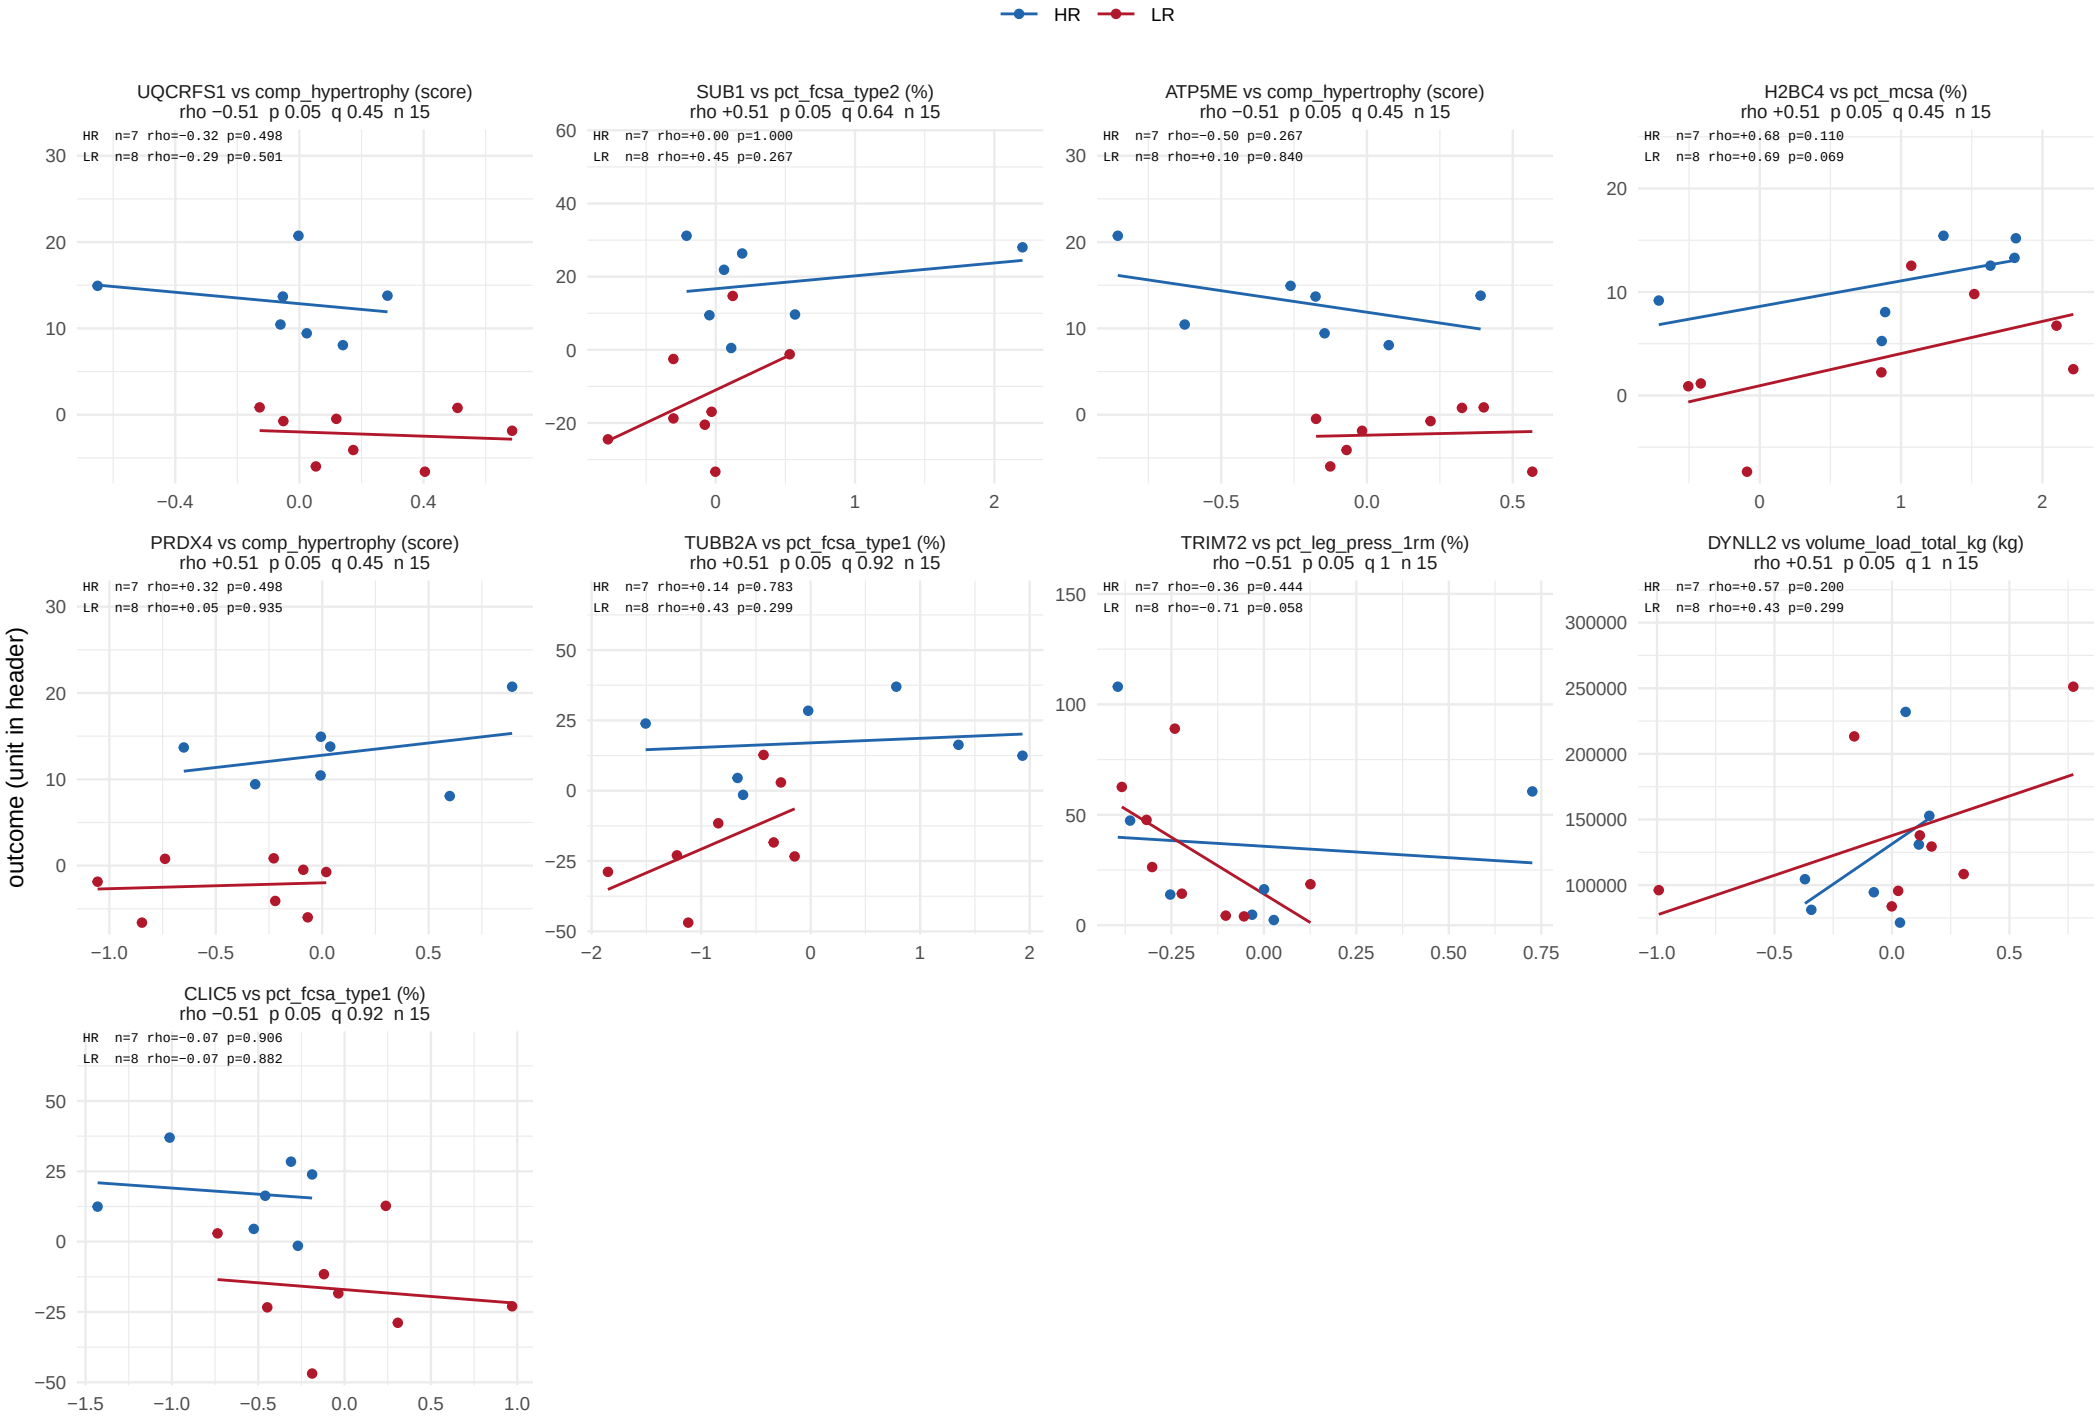

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Arm difference, training window


735 of 11282 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 1 of 62.

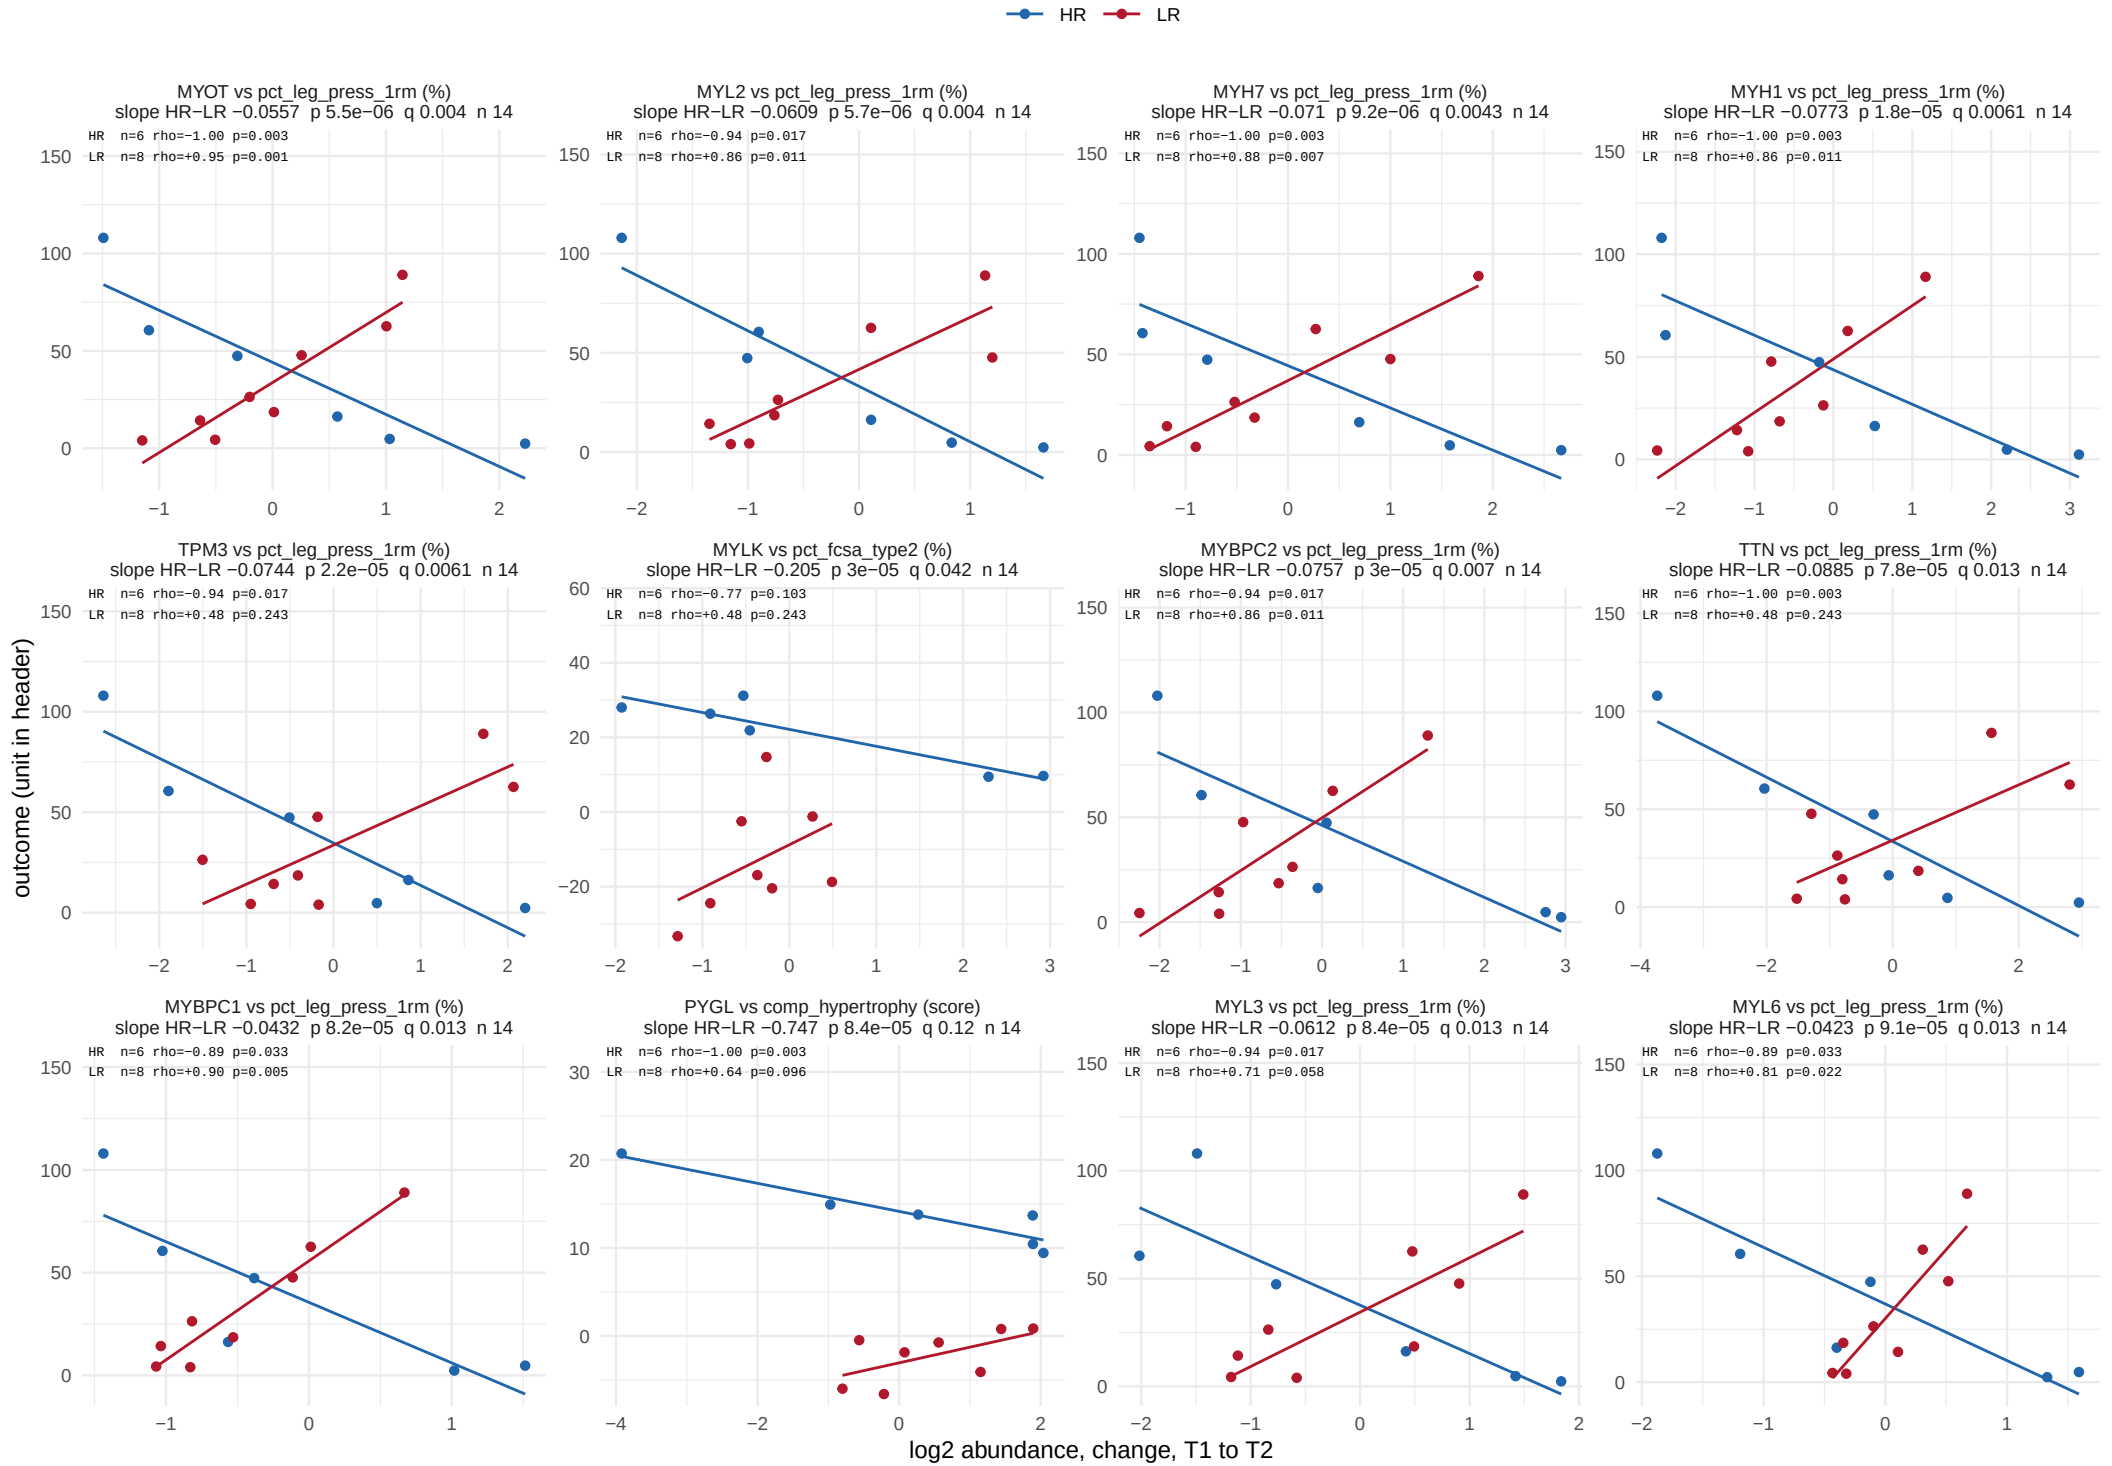

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


735 of 11282 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 2 of 62.

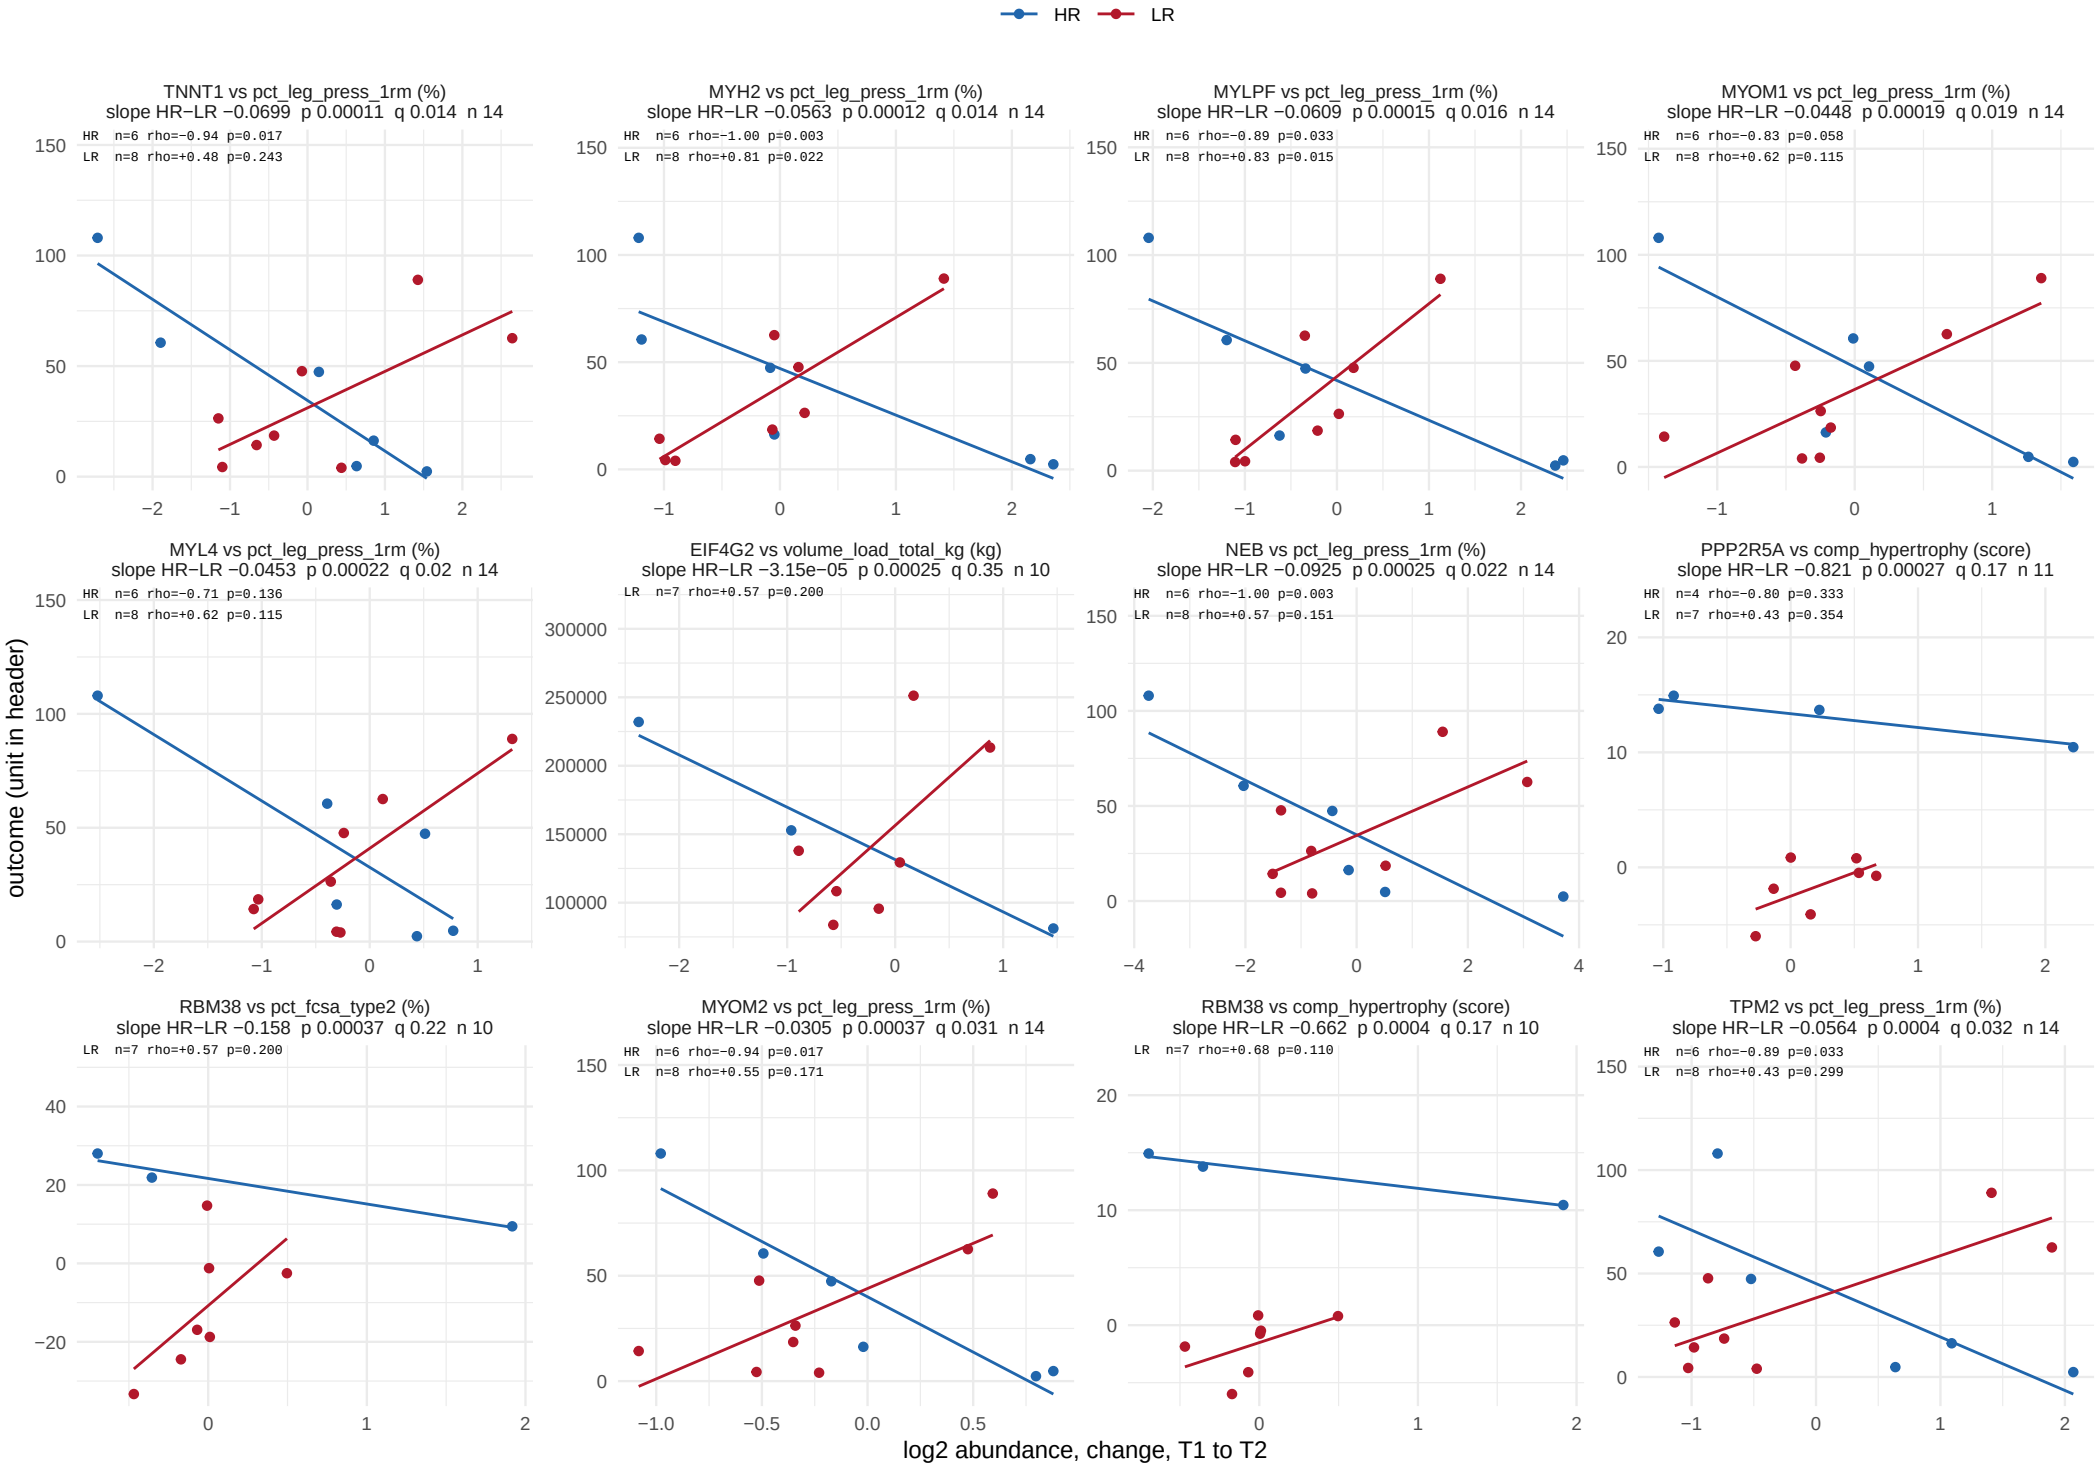

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


735 of 11282 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 3 of 62.

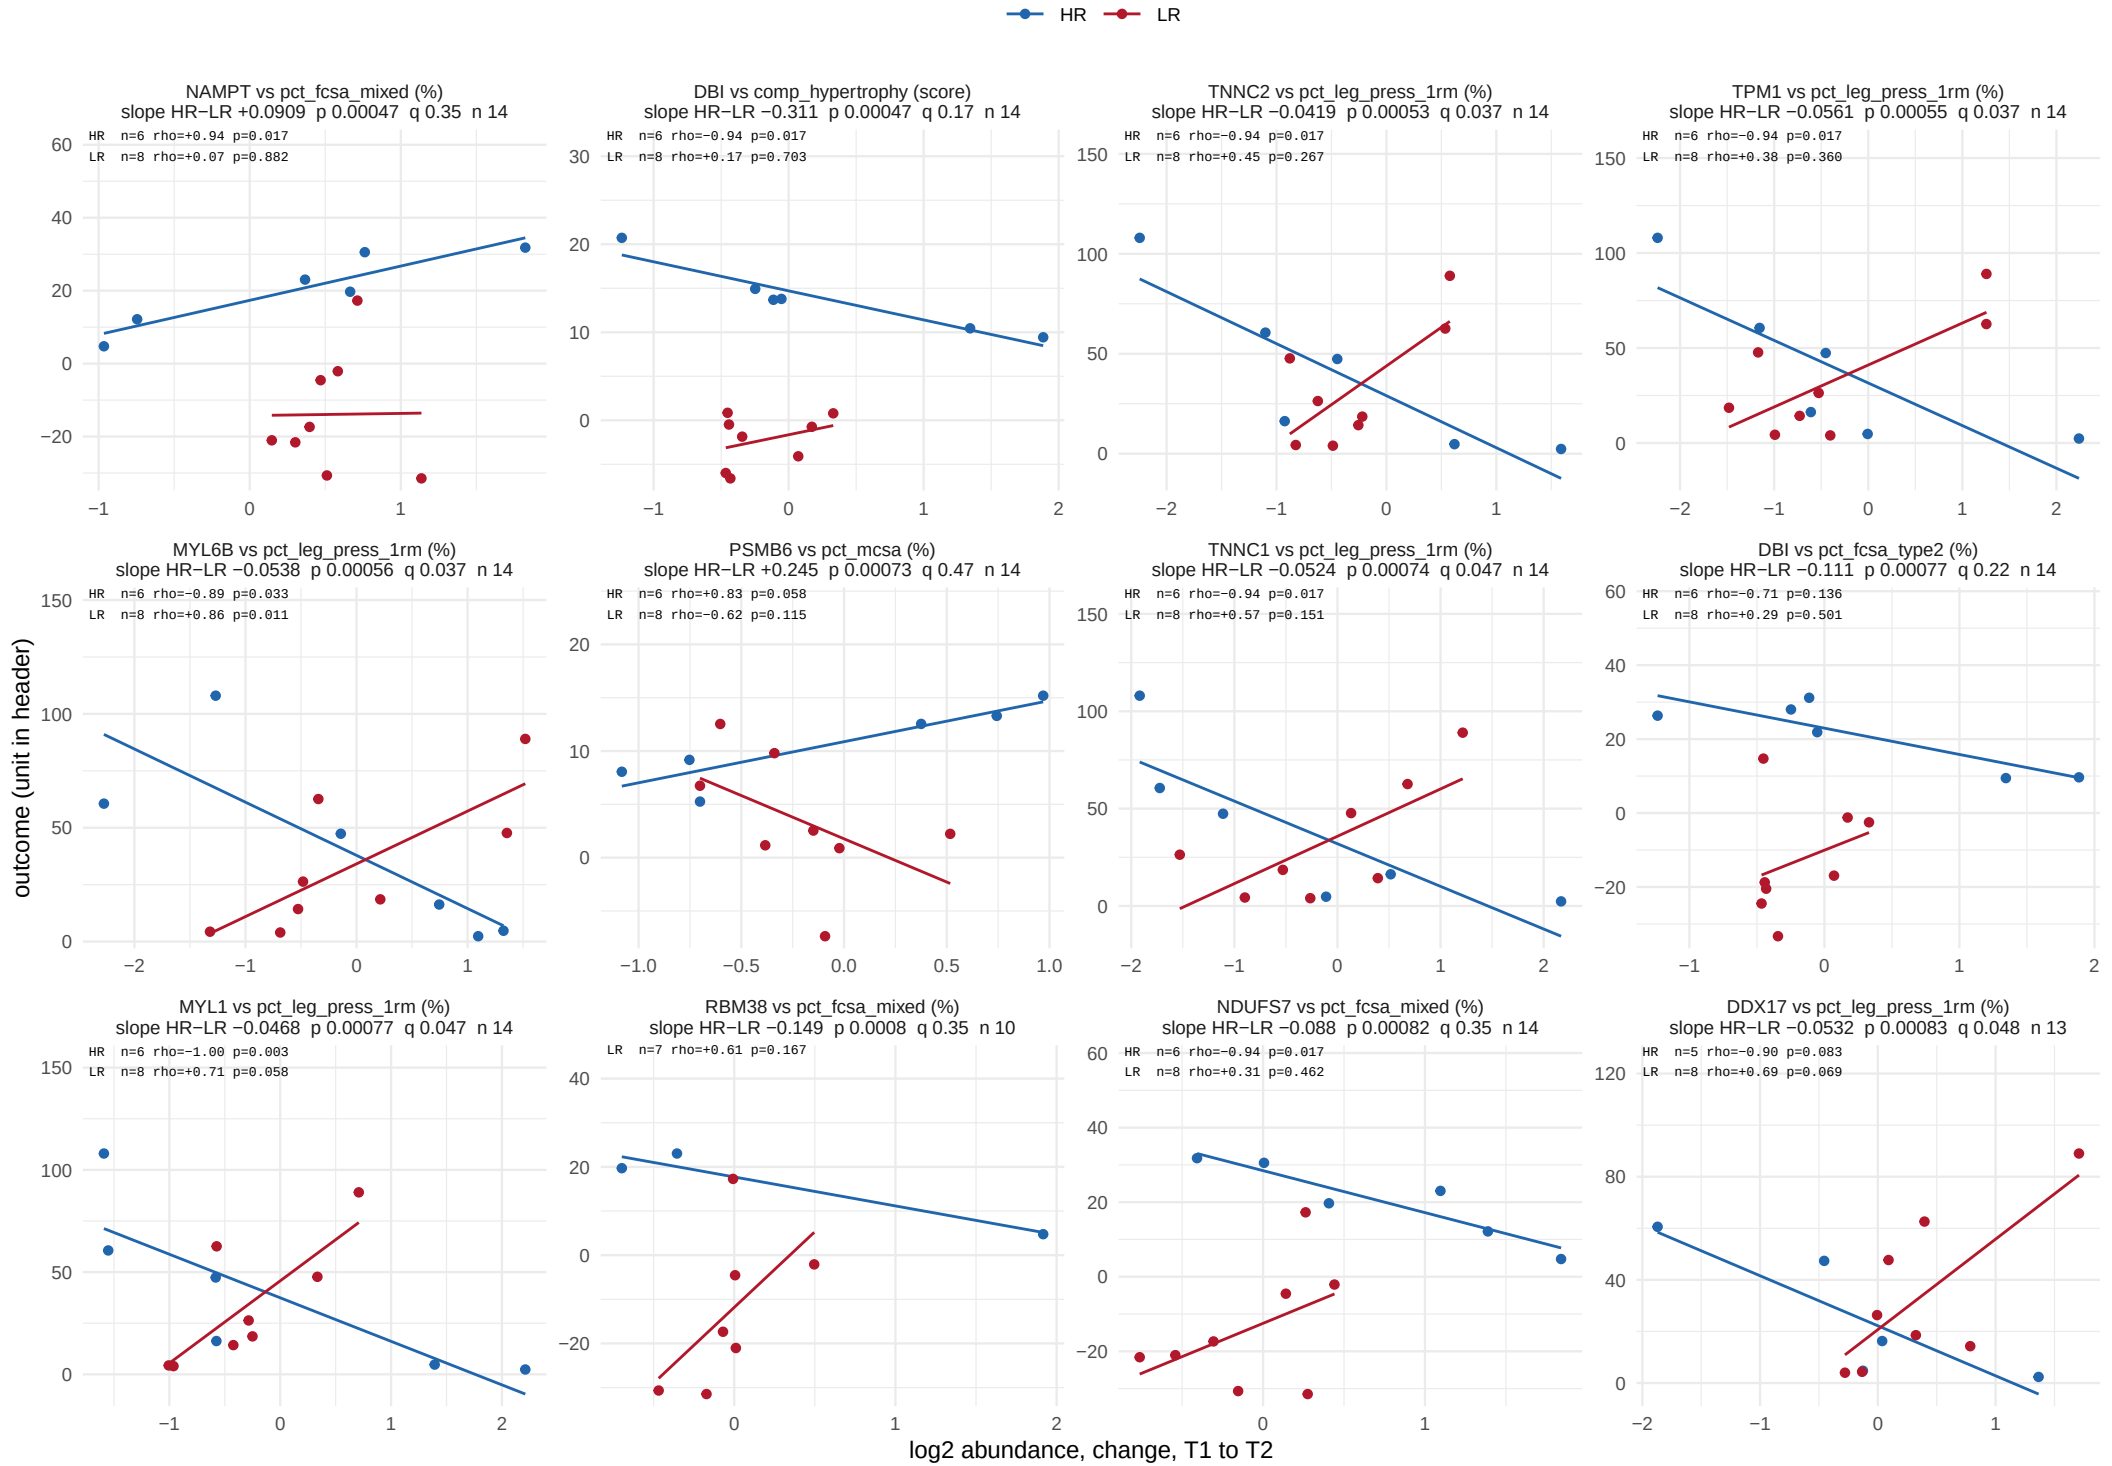

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


735 of 11282 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 4 of 62.

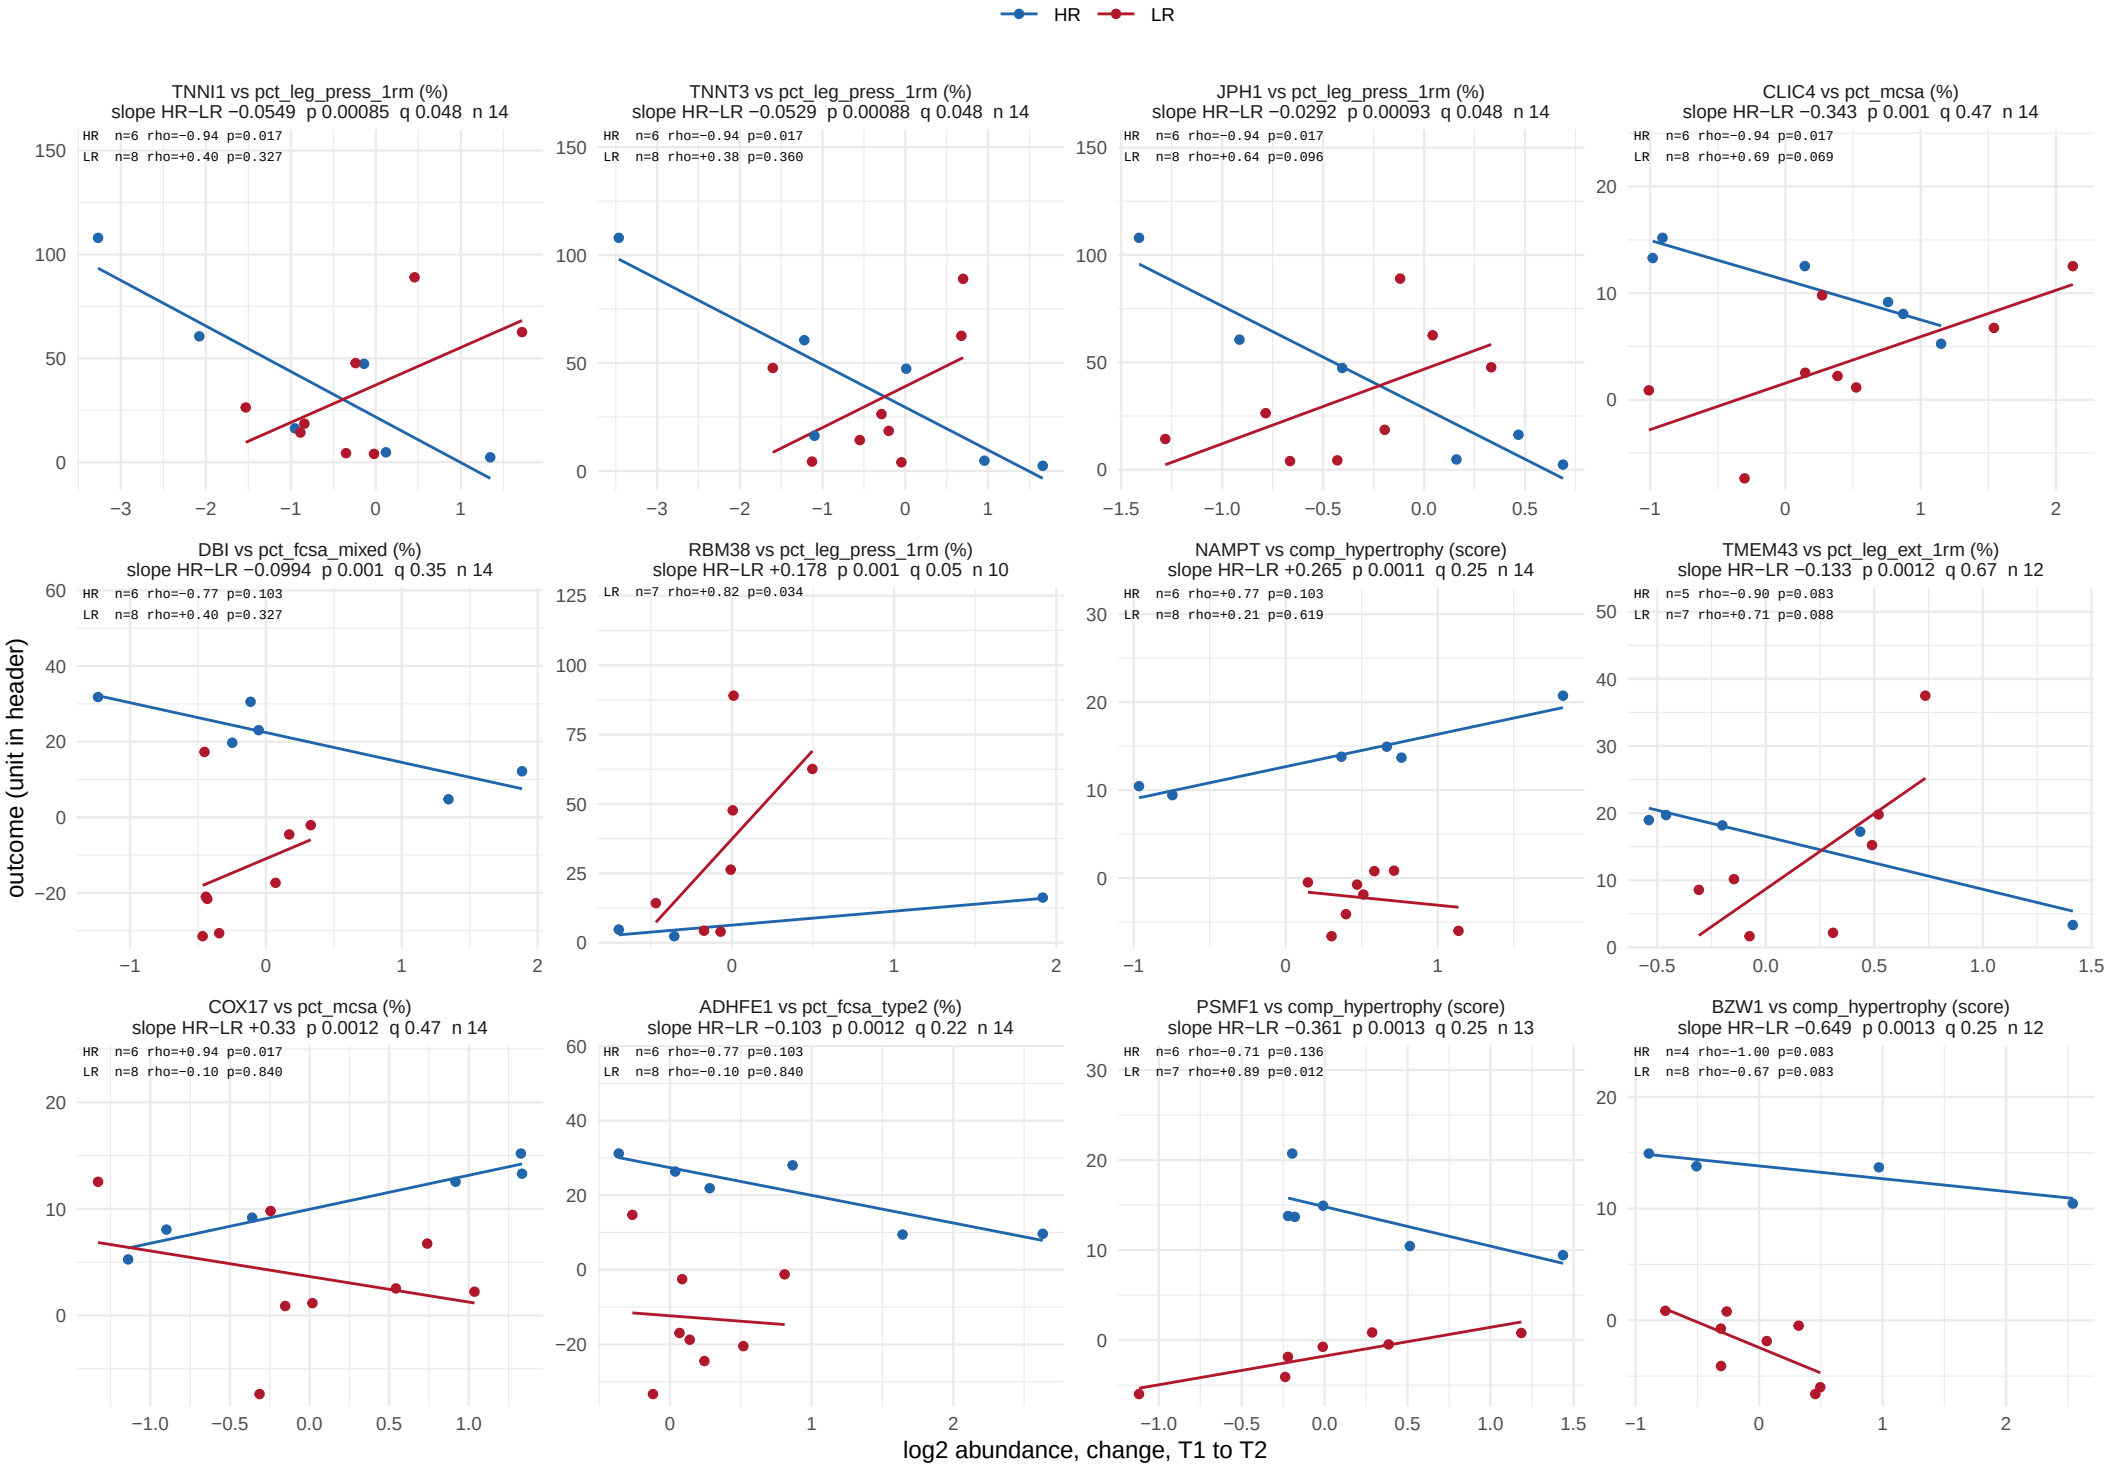

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


735 of 11282 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 5 of 62.

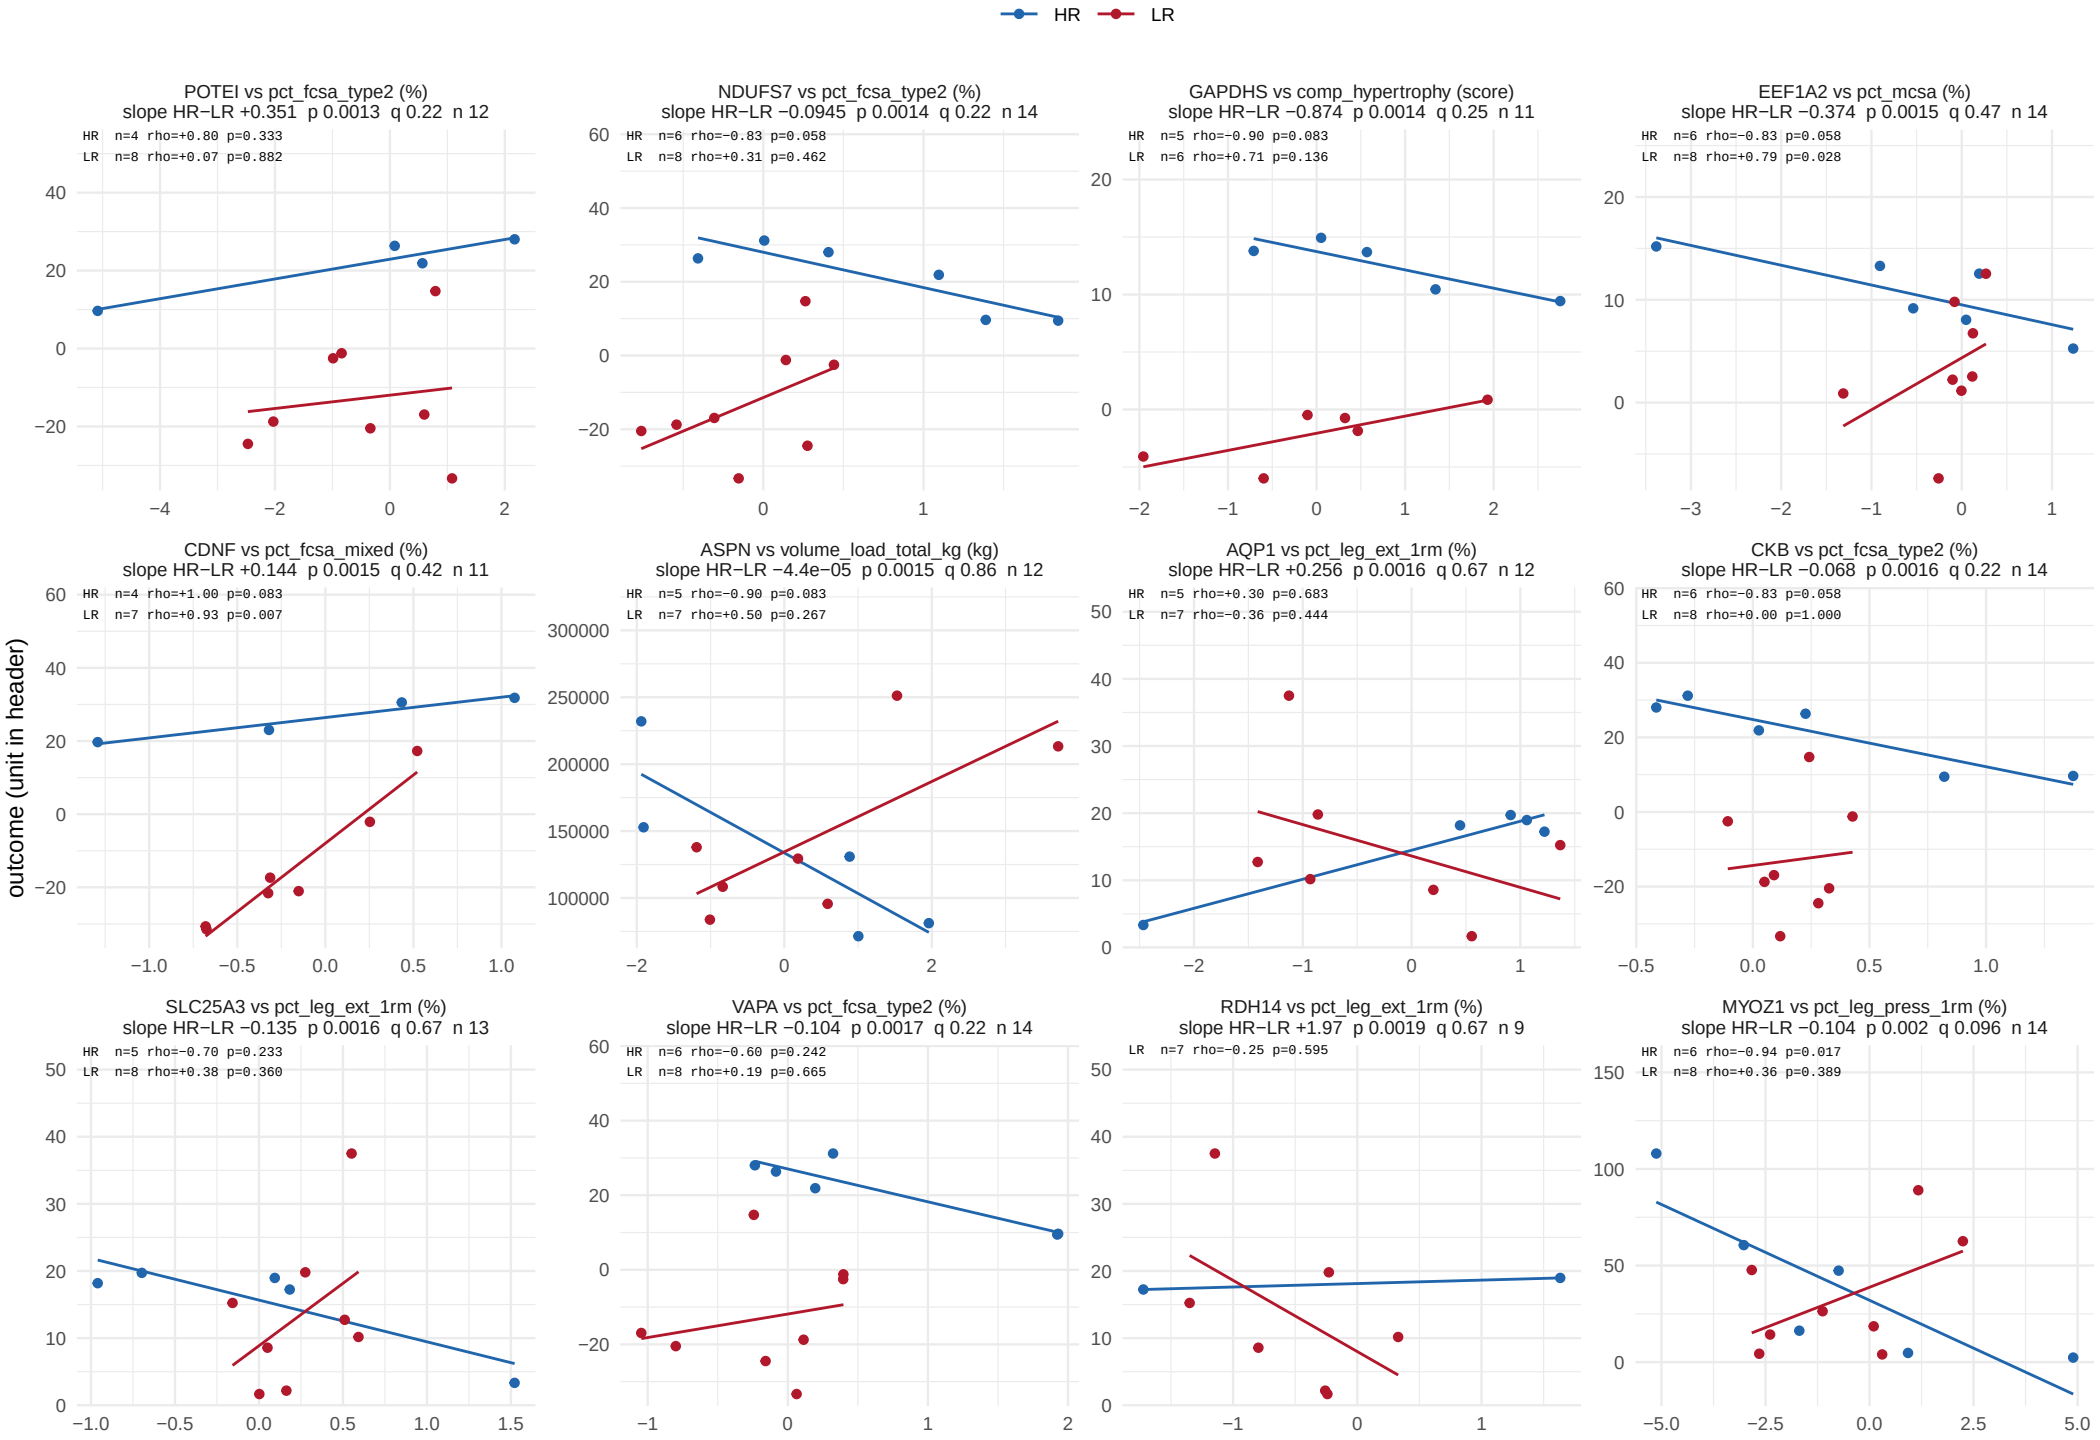

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


735 of 11282 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 6 of 62.

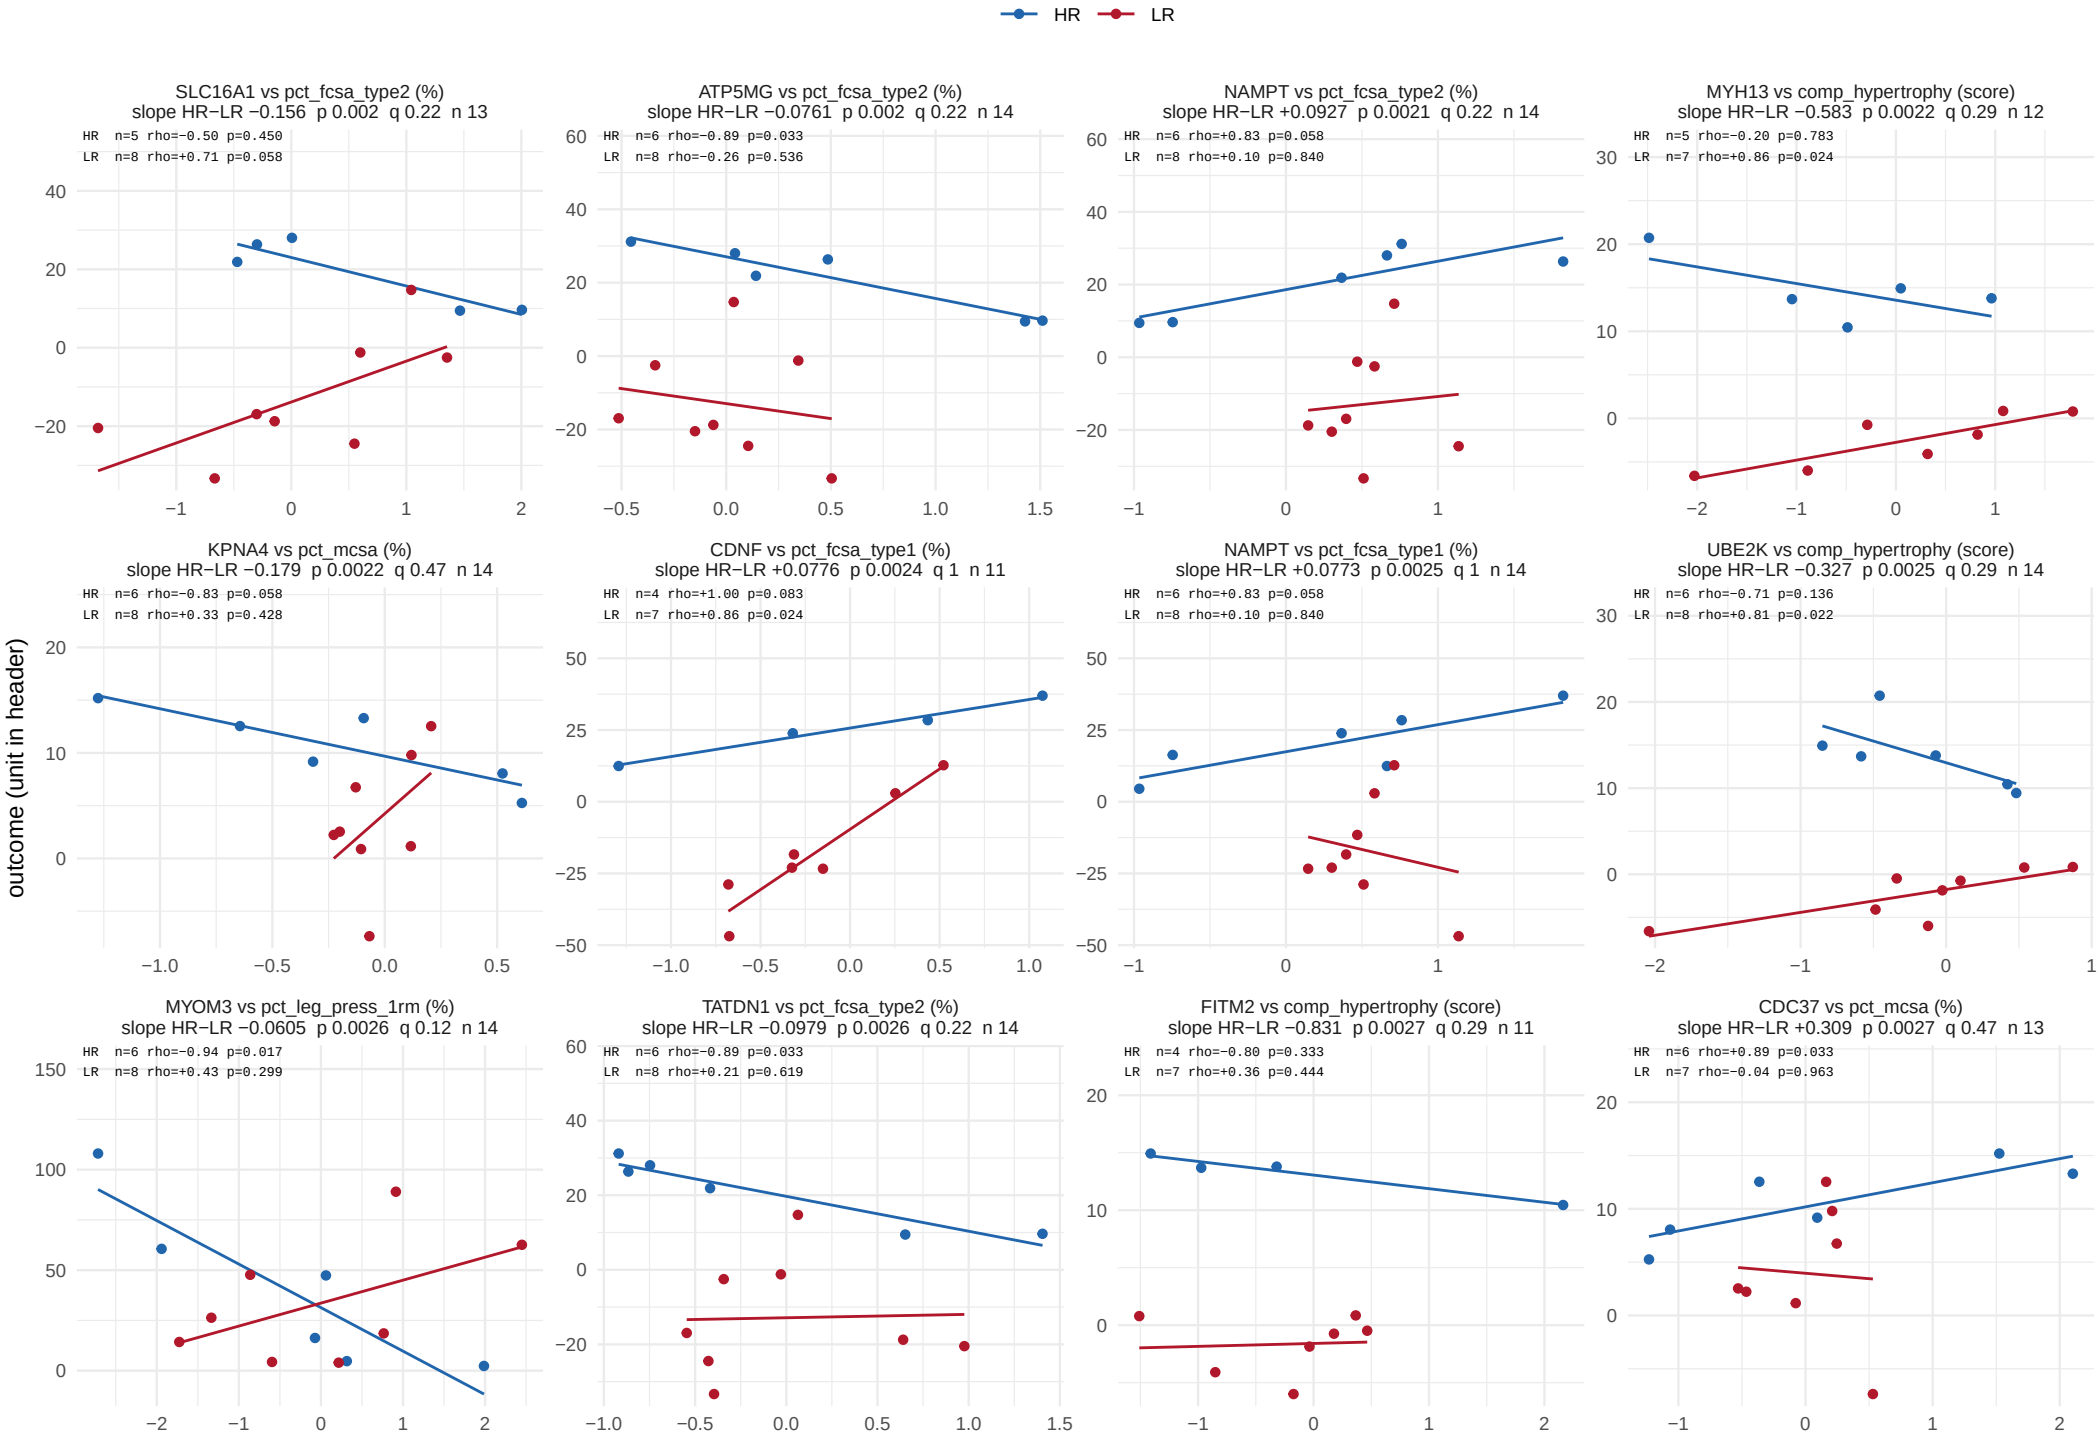

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


735 of 11282 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 7 of 62.

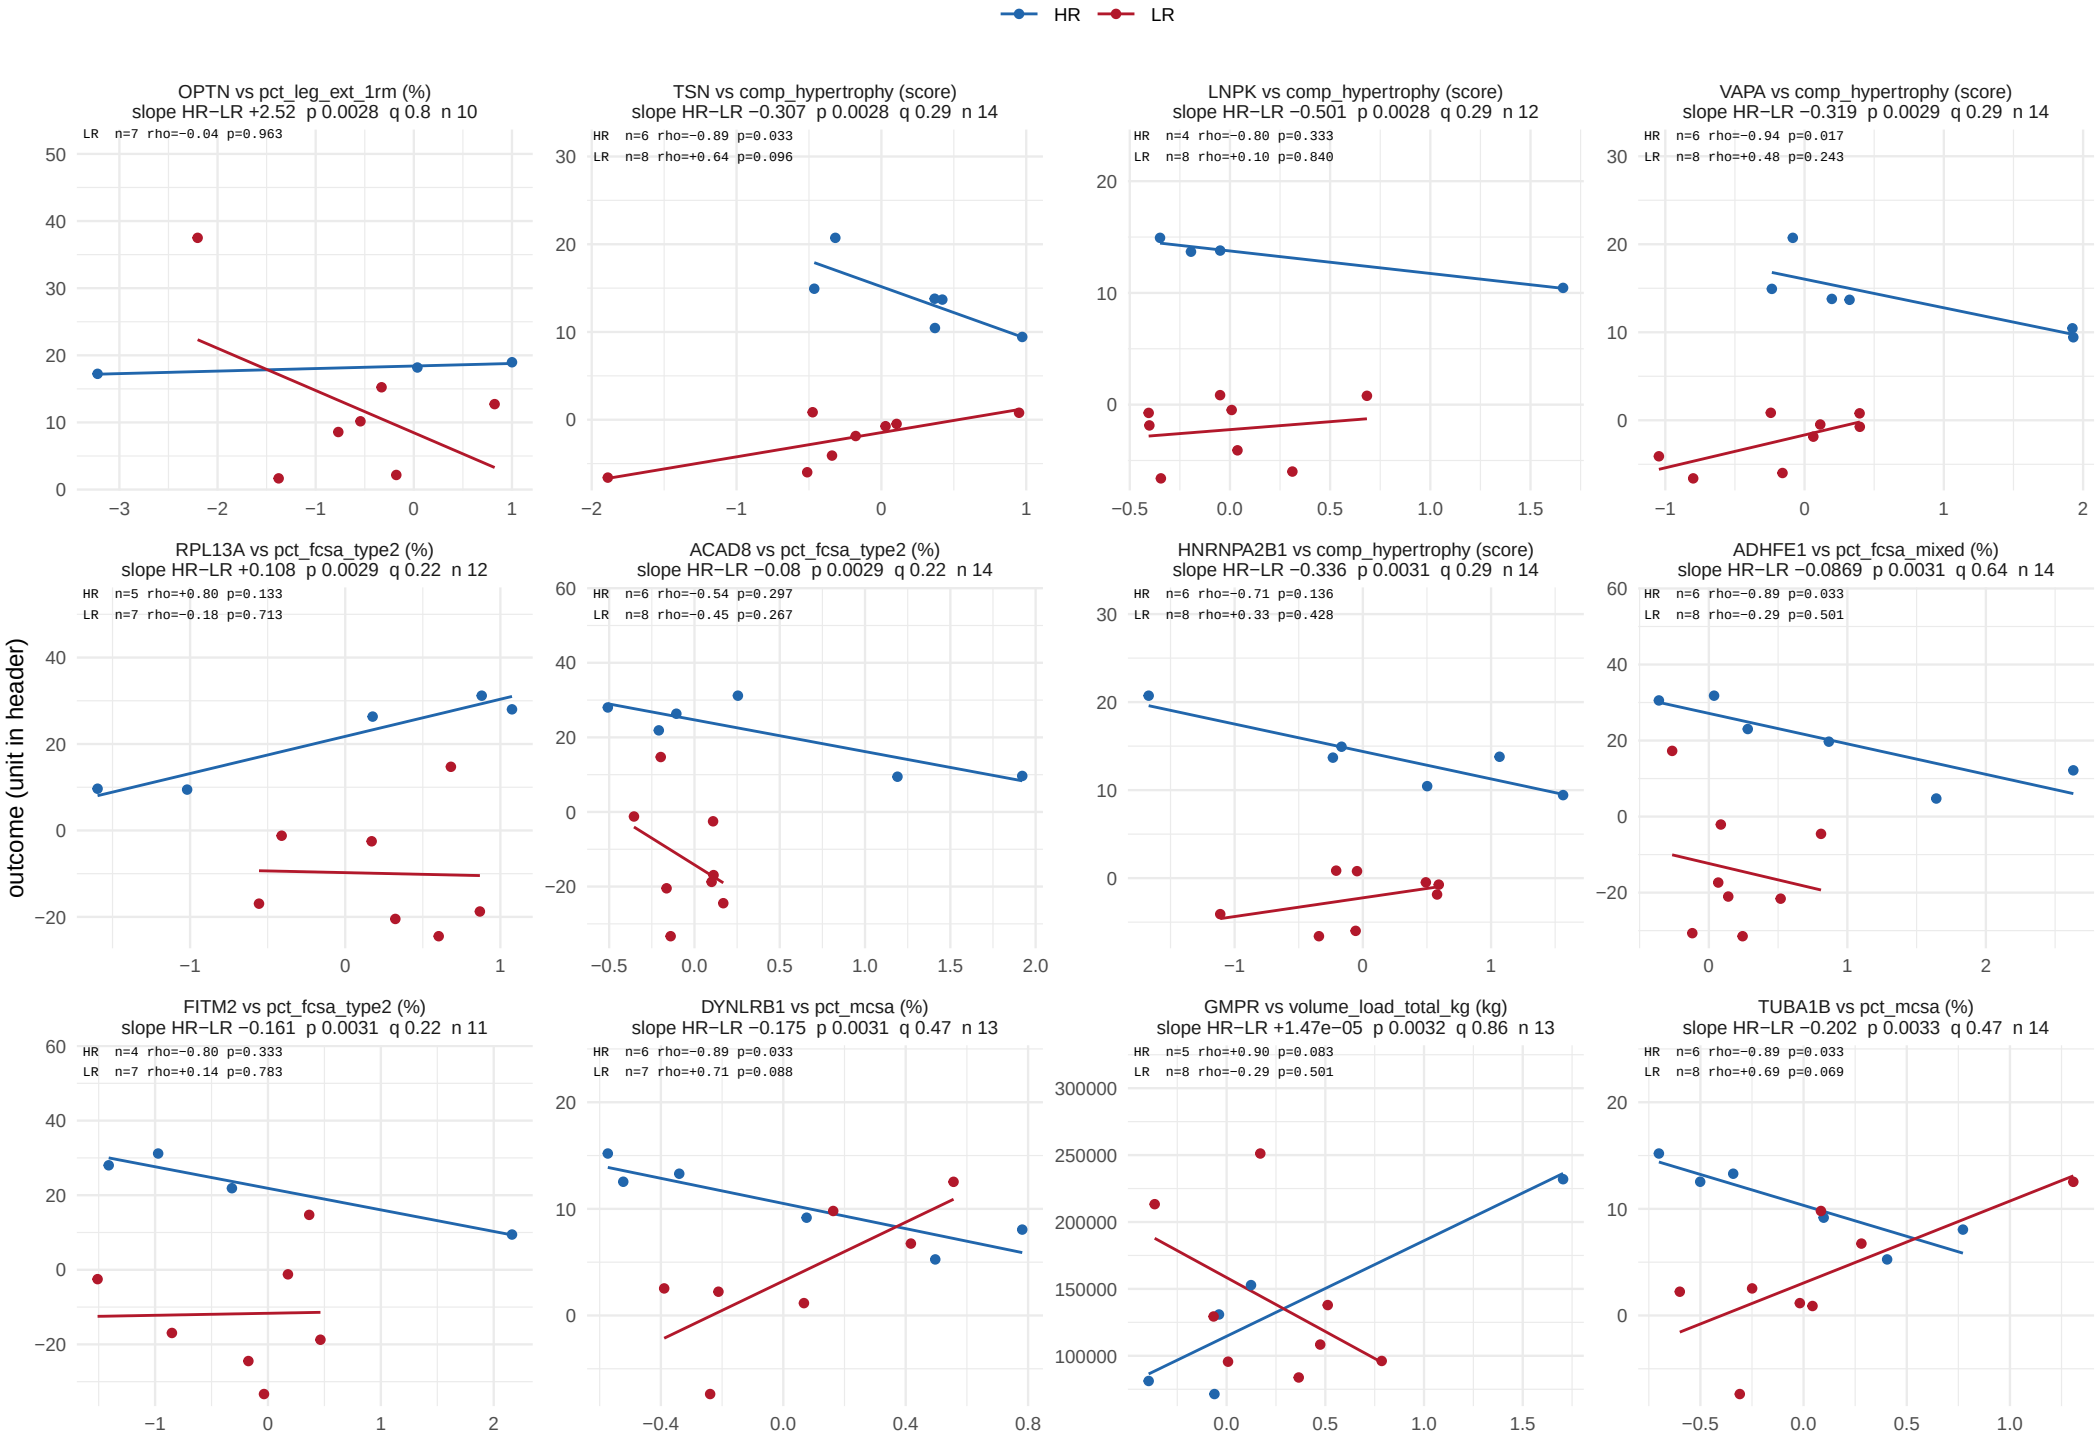

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


735 of 11282 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 8 of 62.

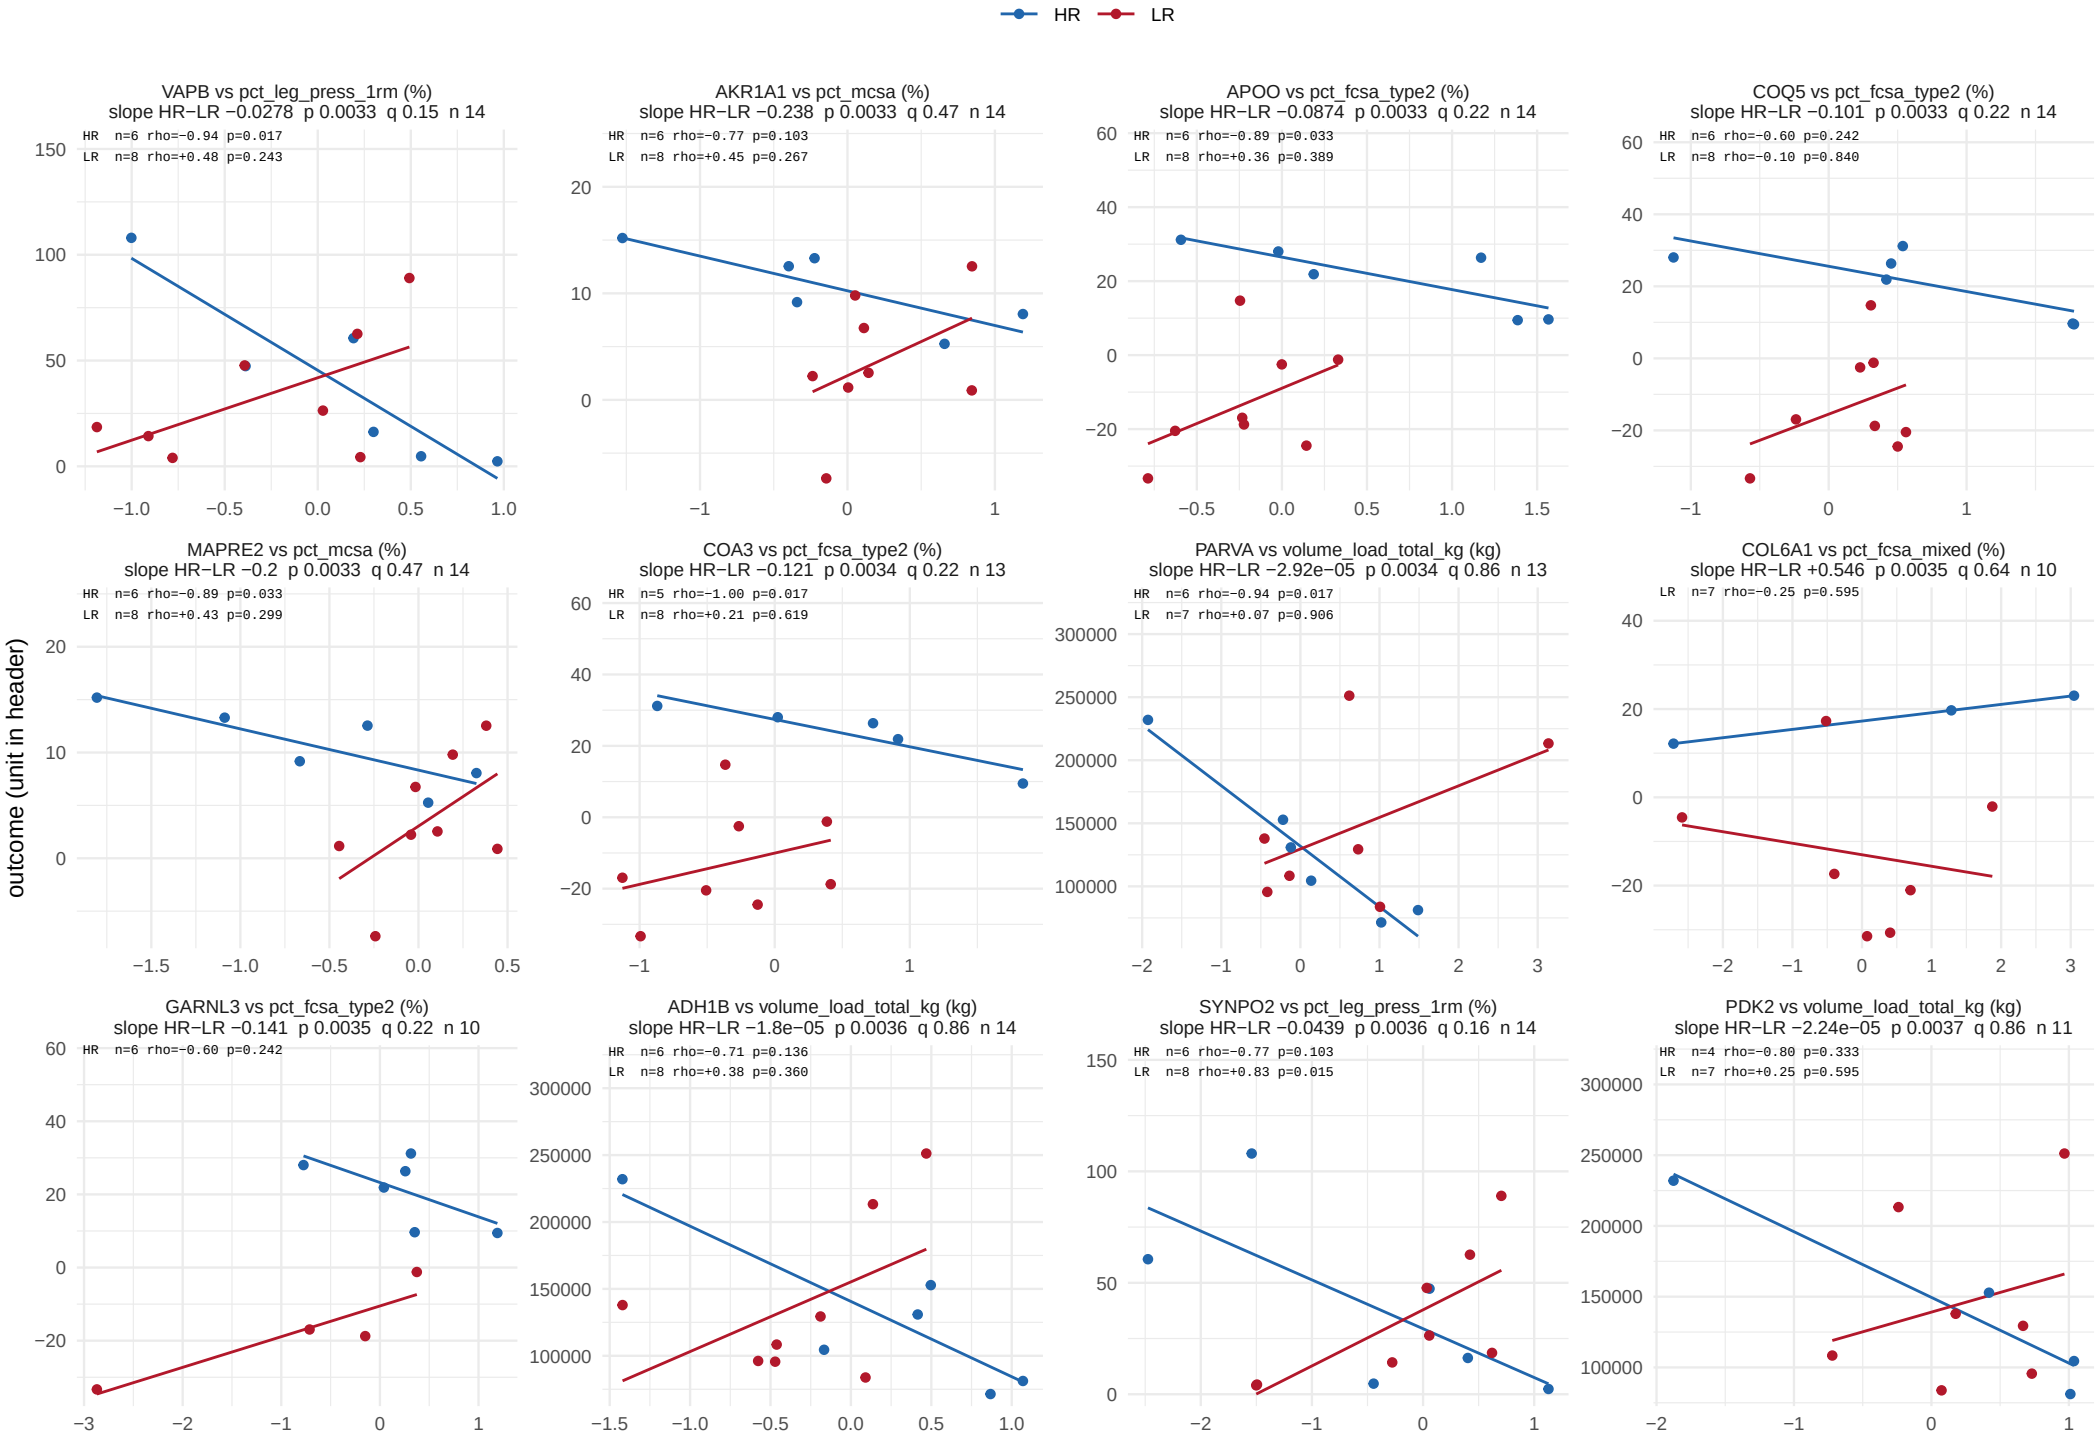

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


735 of 11282 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 9 of 62.

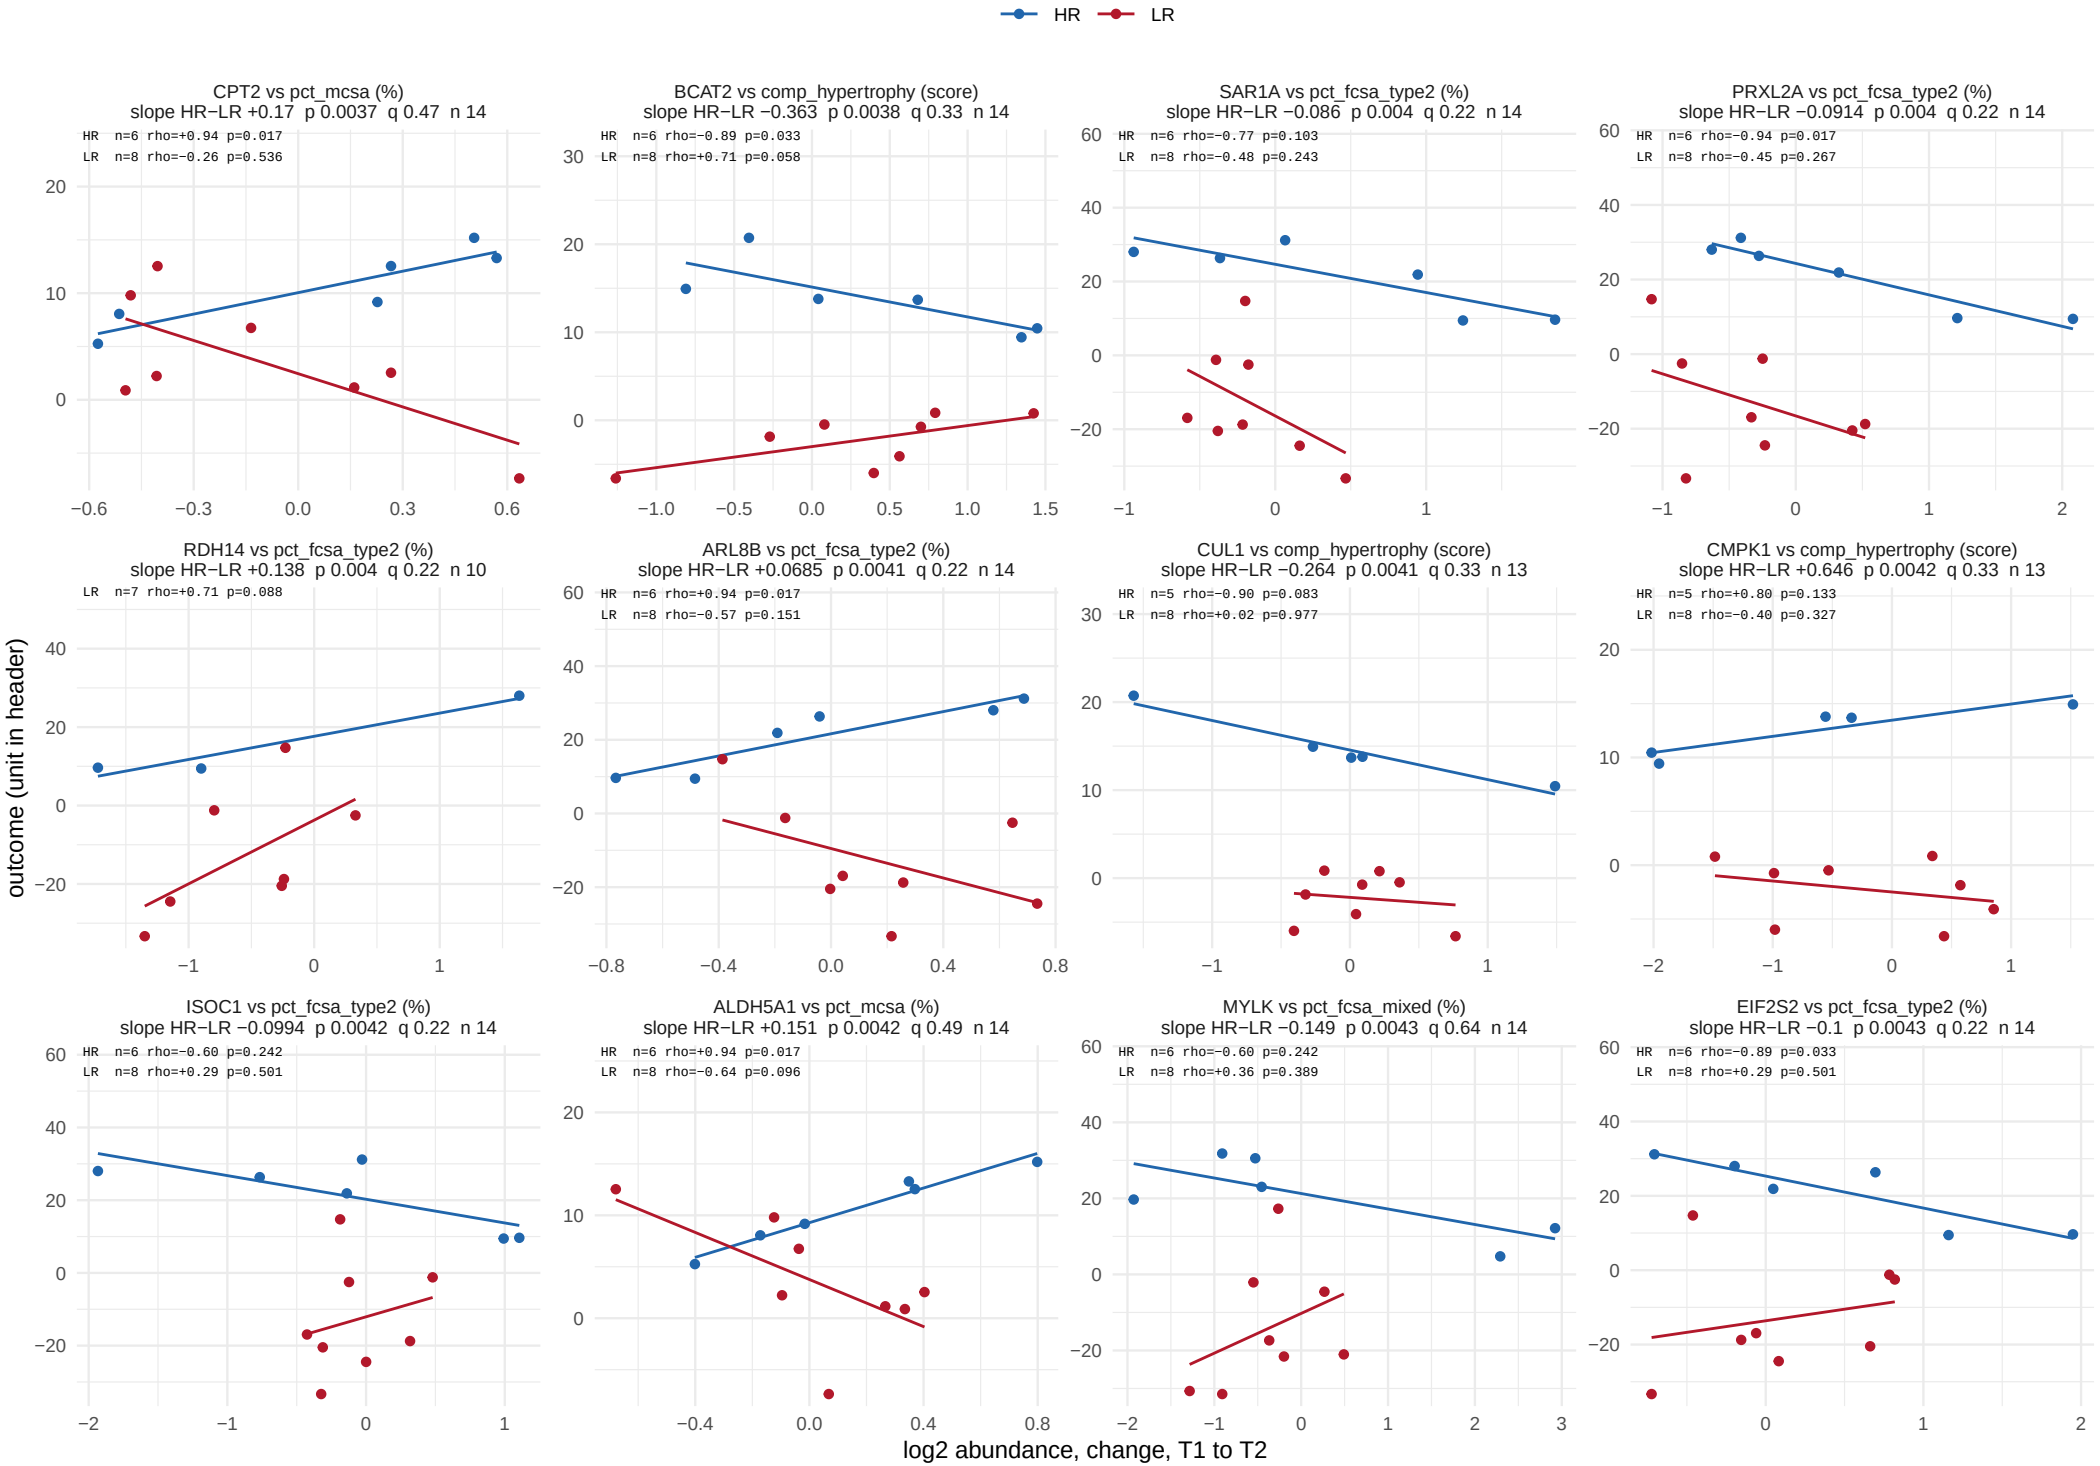

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


735 of 11282 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 10 of 62.

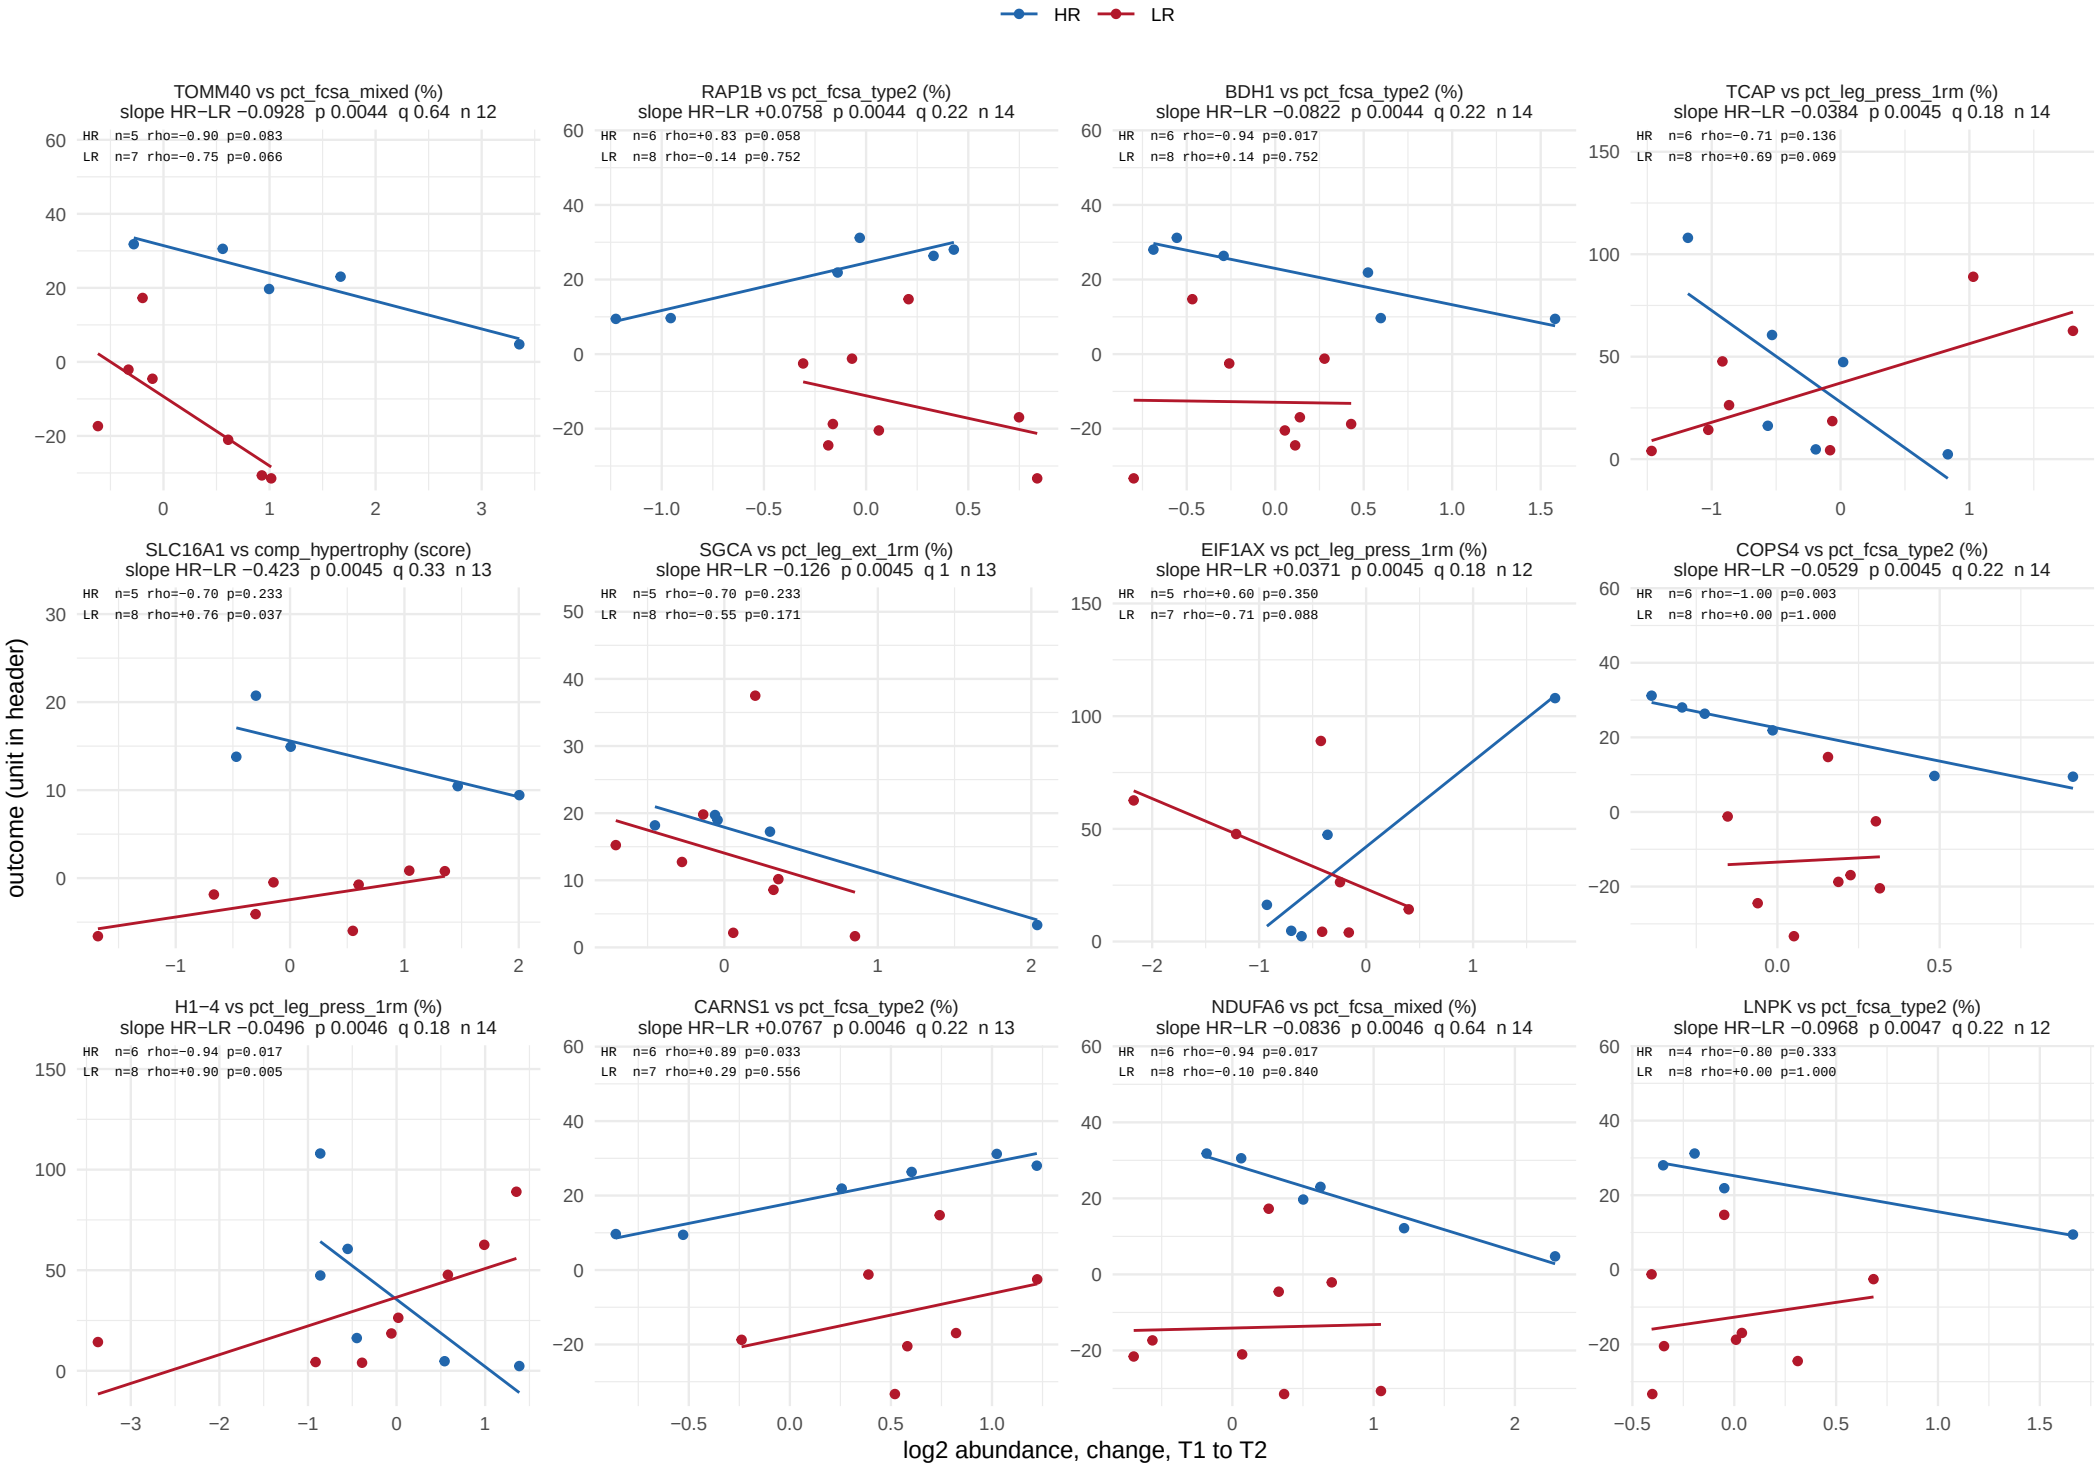

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


735 of 11282 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 11 of 62.

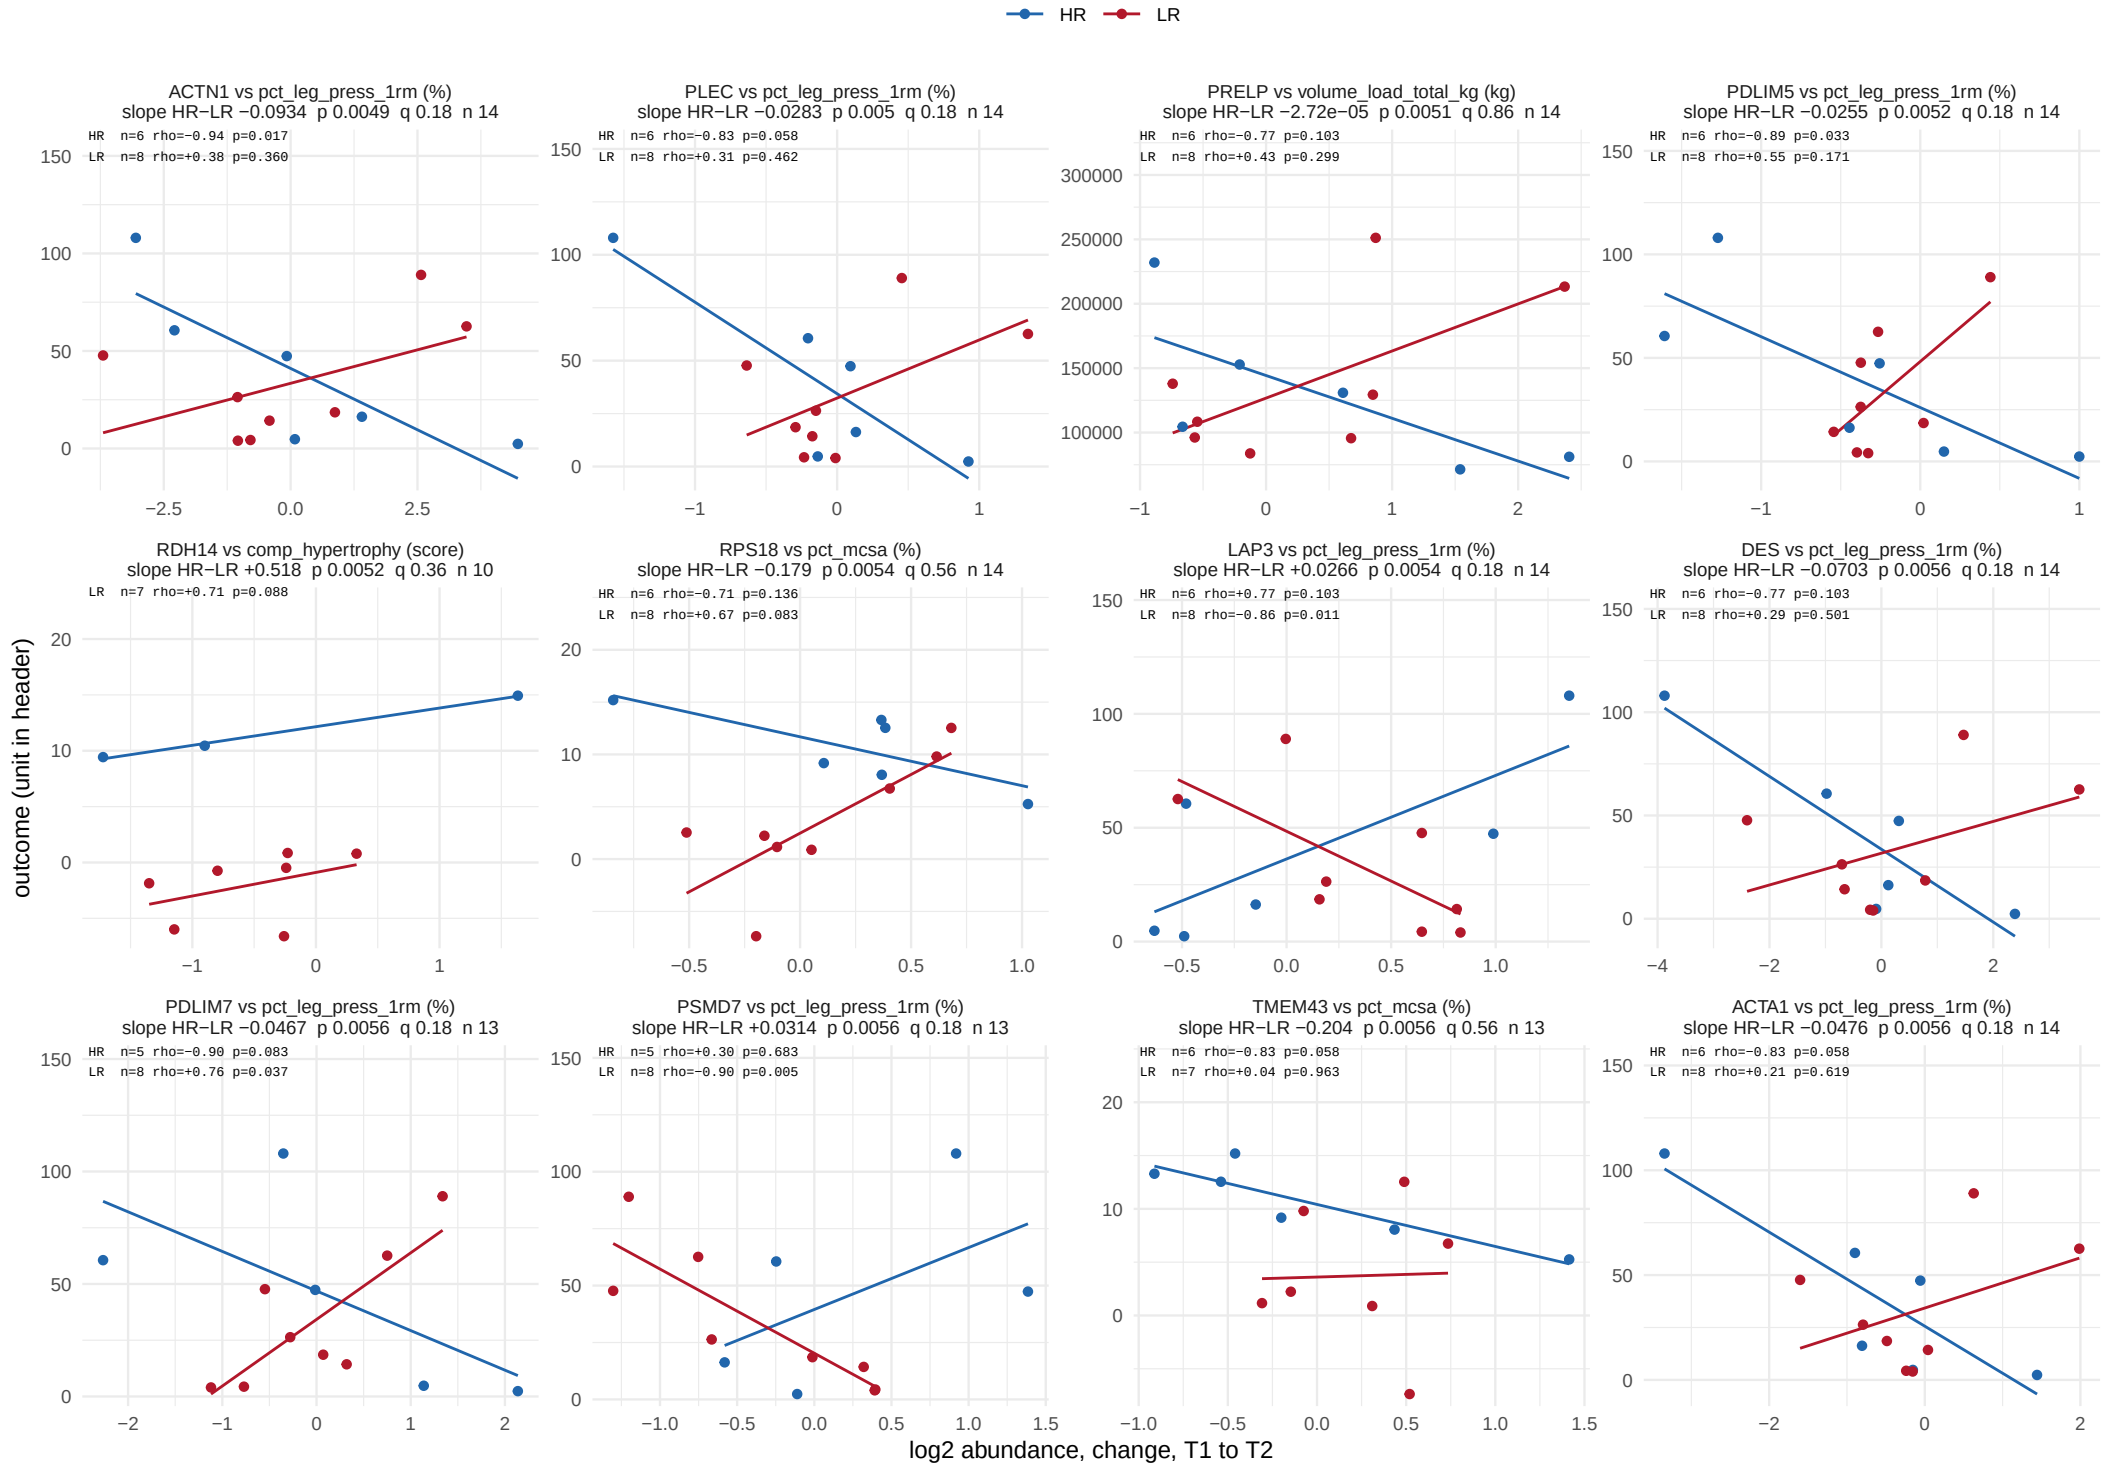

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


735 of 11282 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 12 of 62.

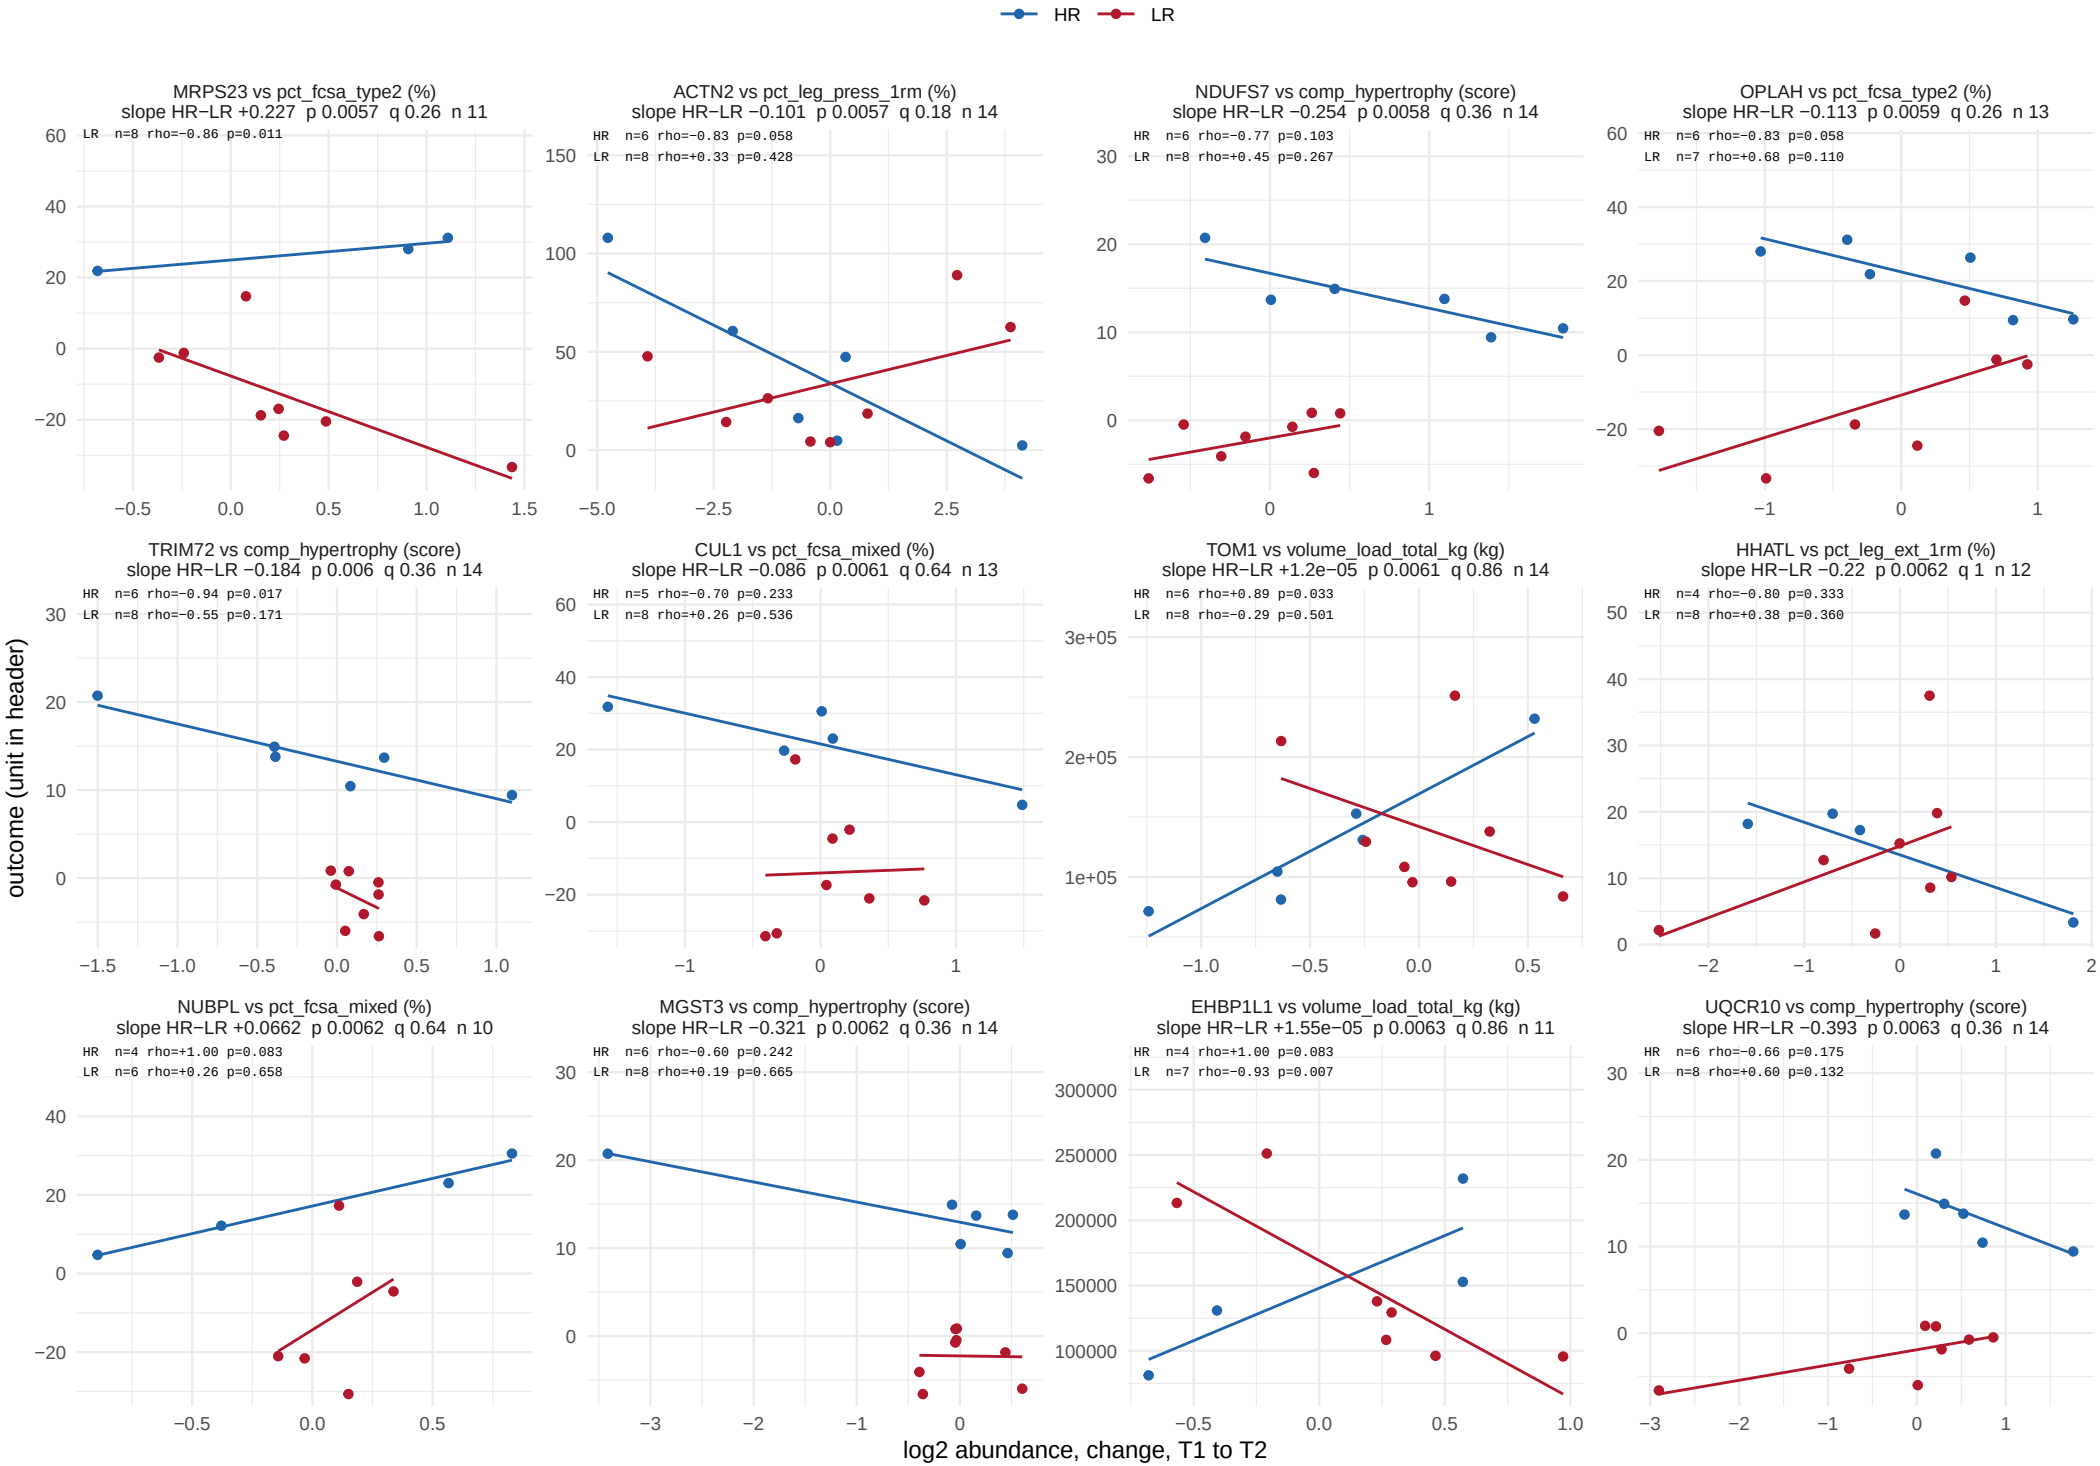

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


735 of 11282 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 13 of 62.

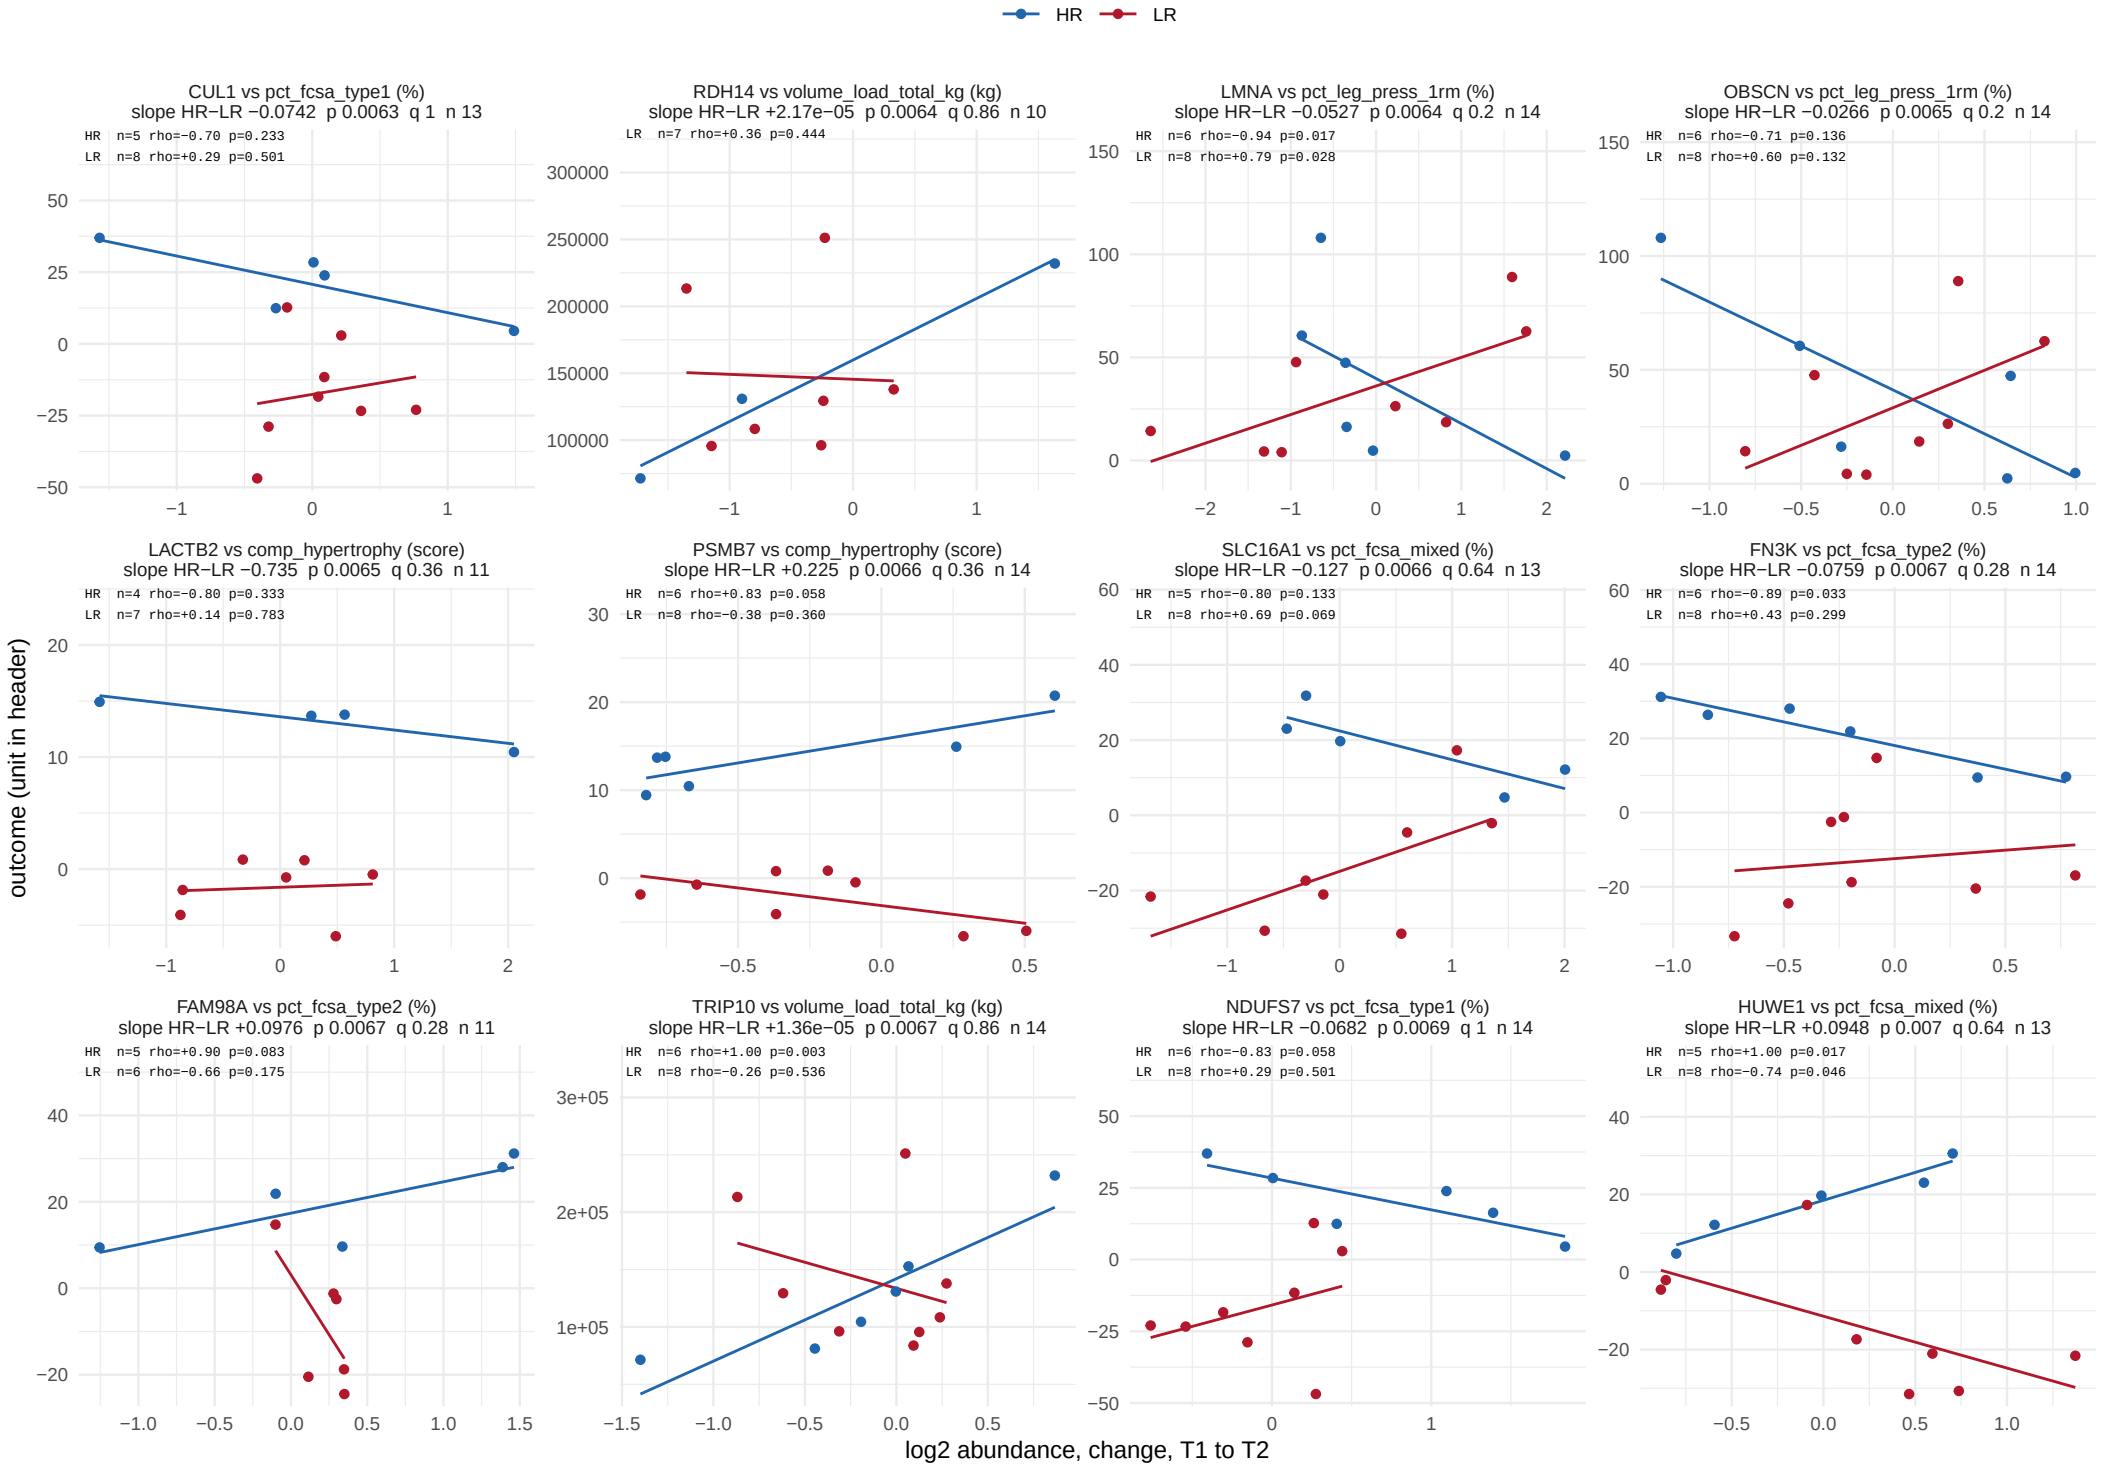

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


735 of 11282 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 14 of 62.

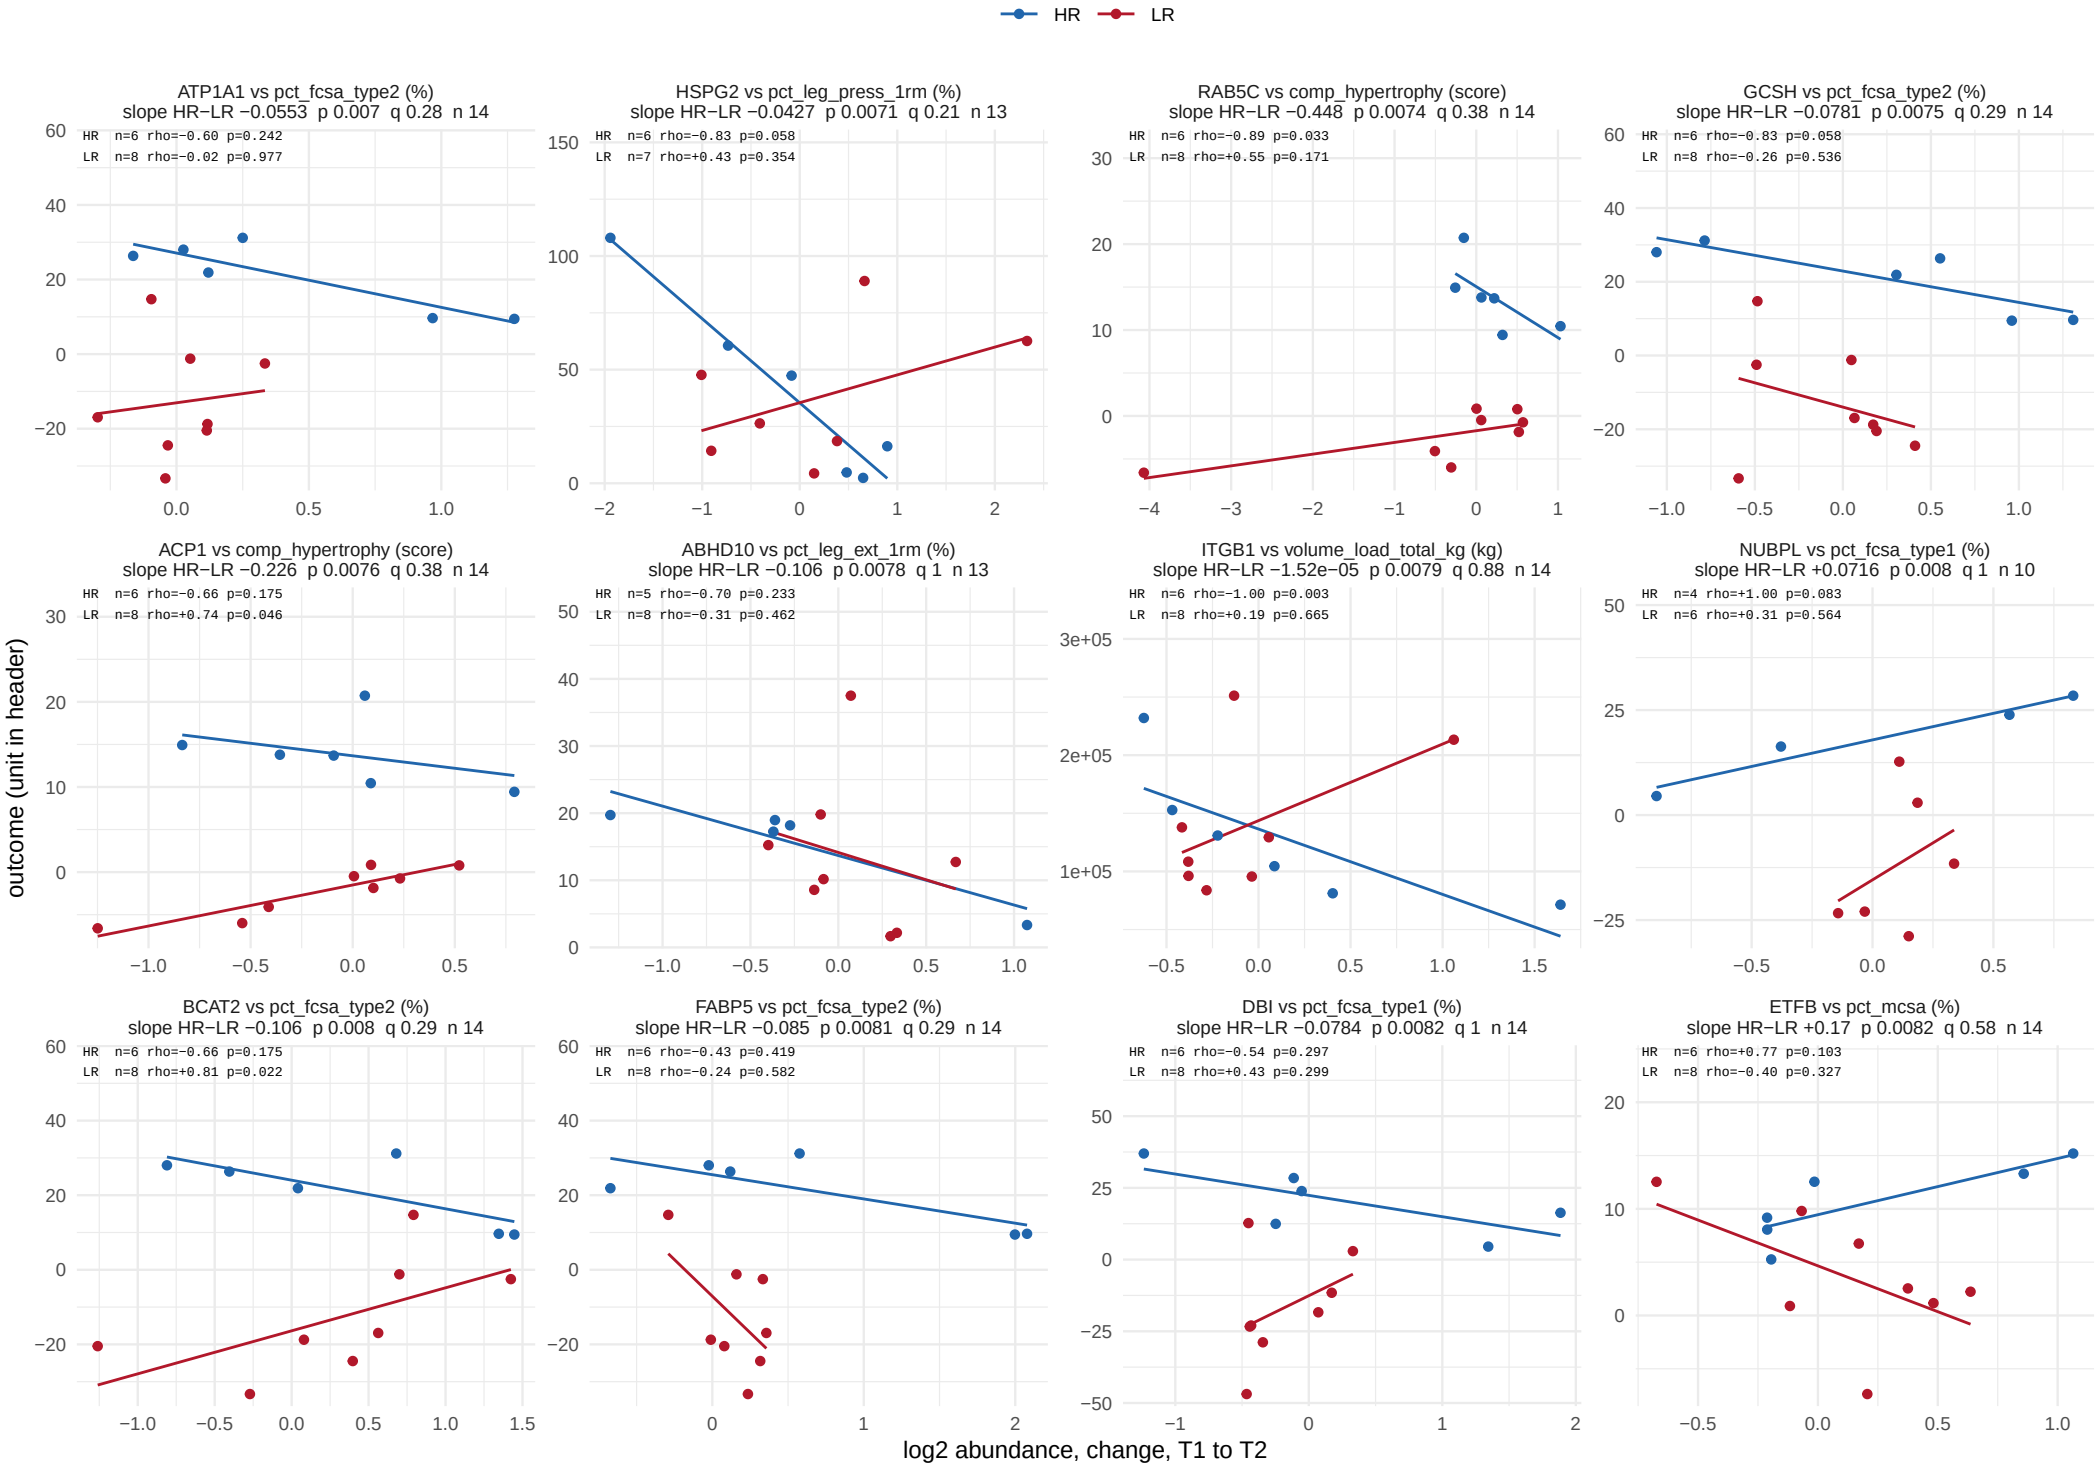

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


735 of 11282 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 15 of 62.

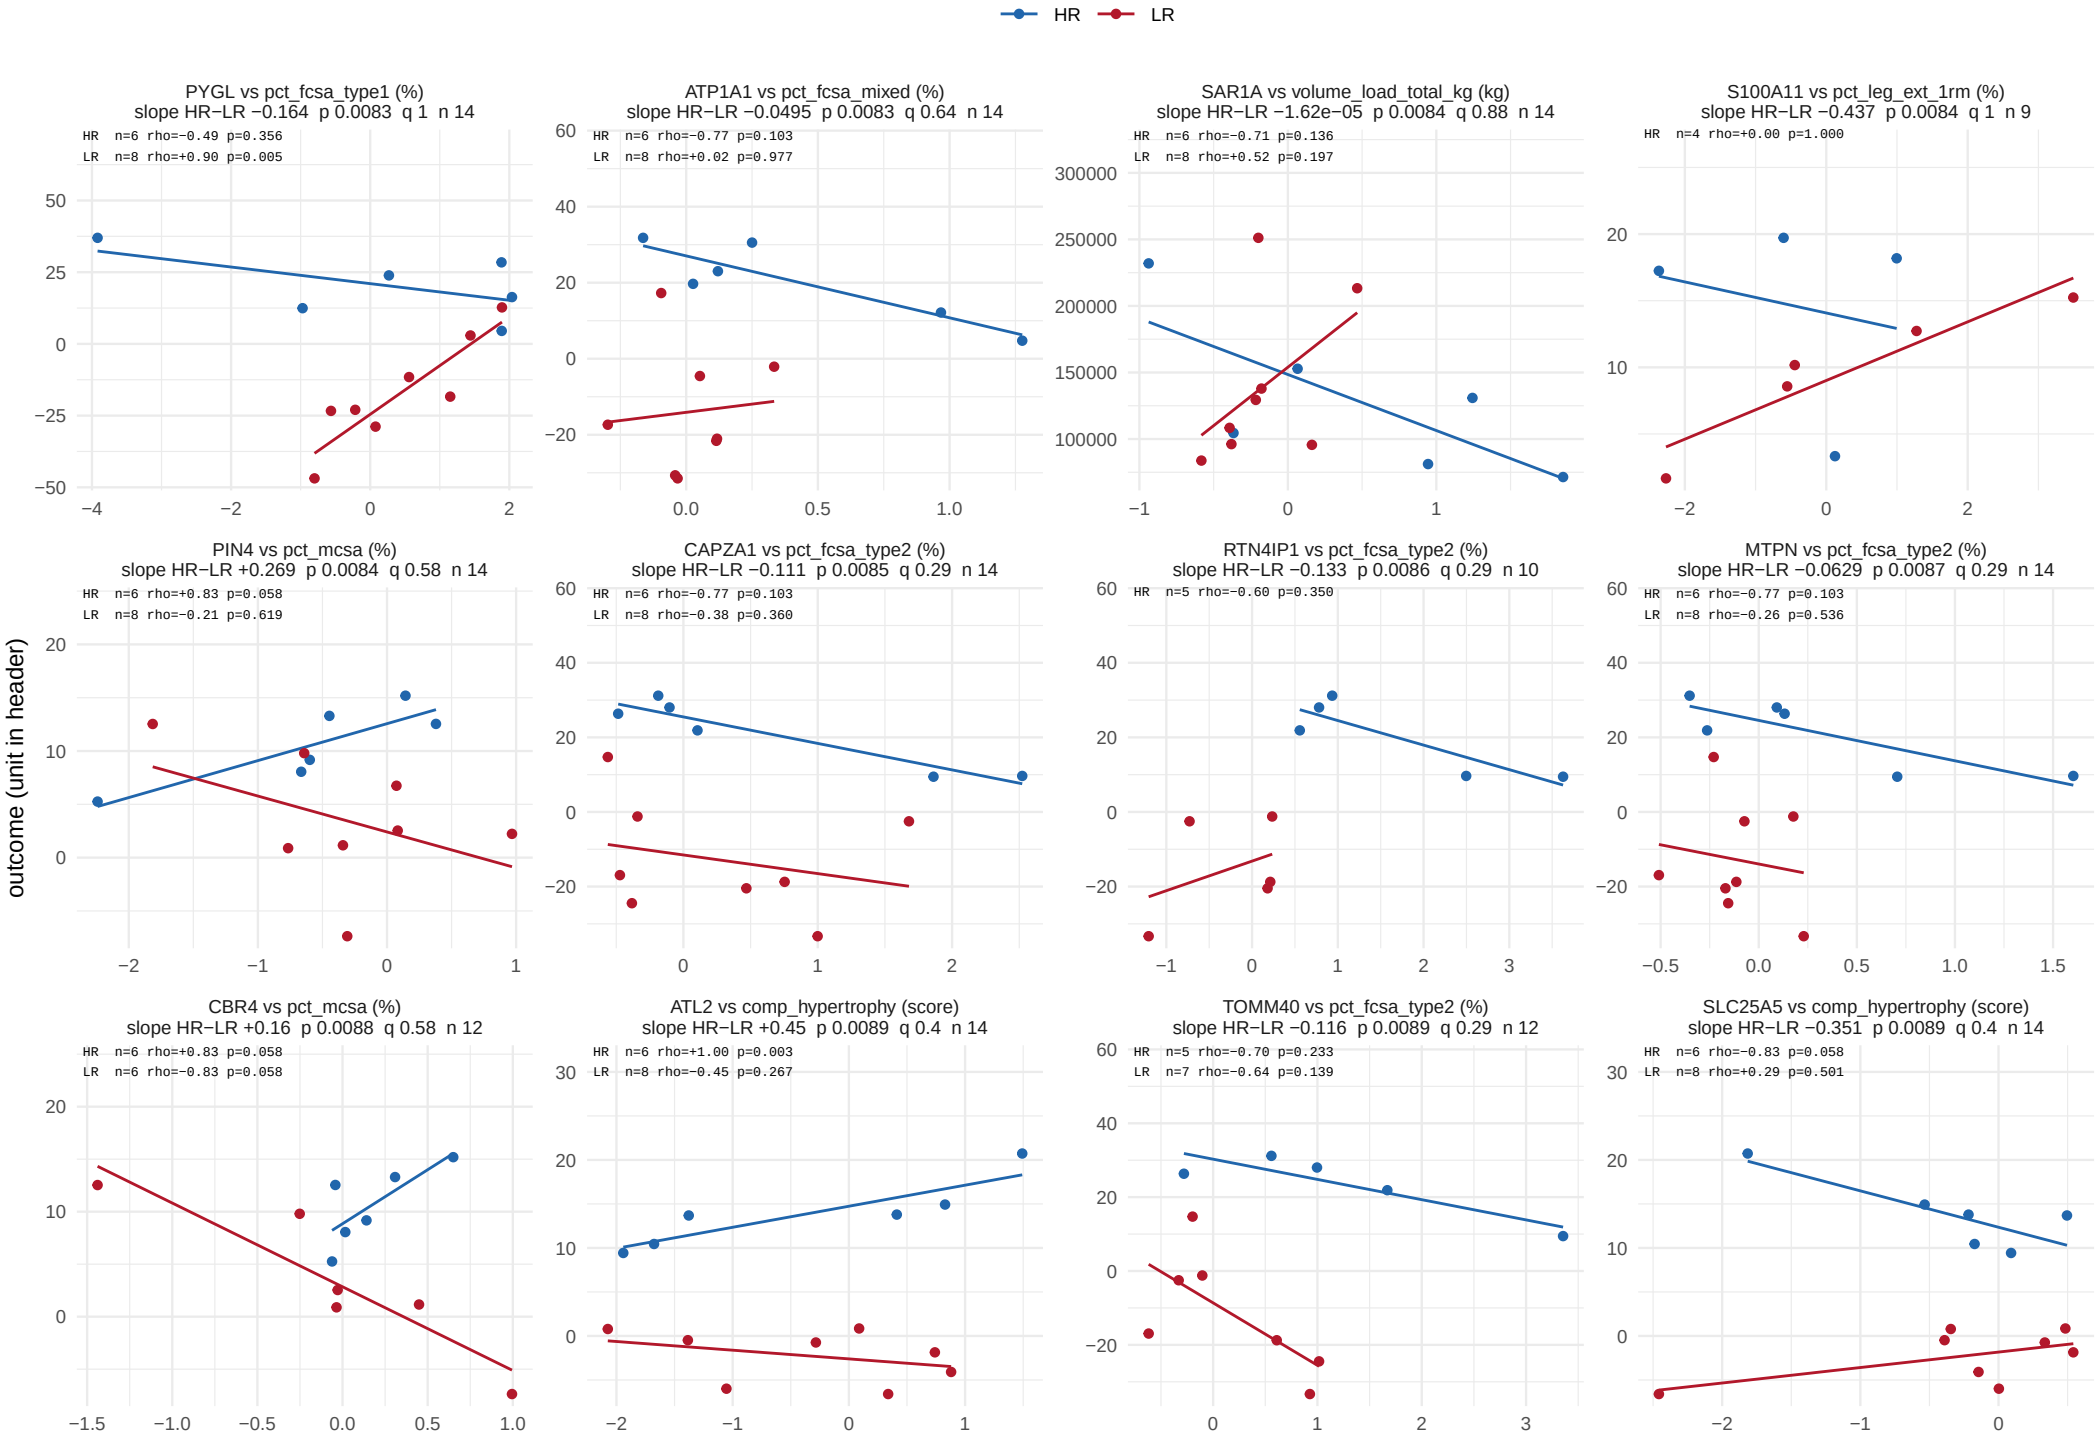

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


735 of 11282 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 16 of 62.

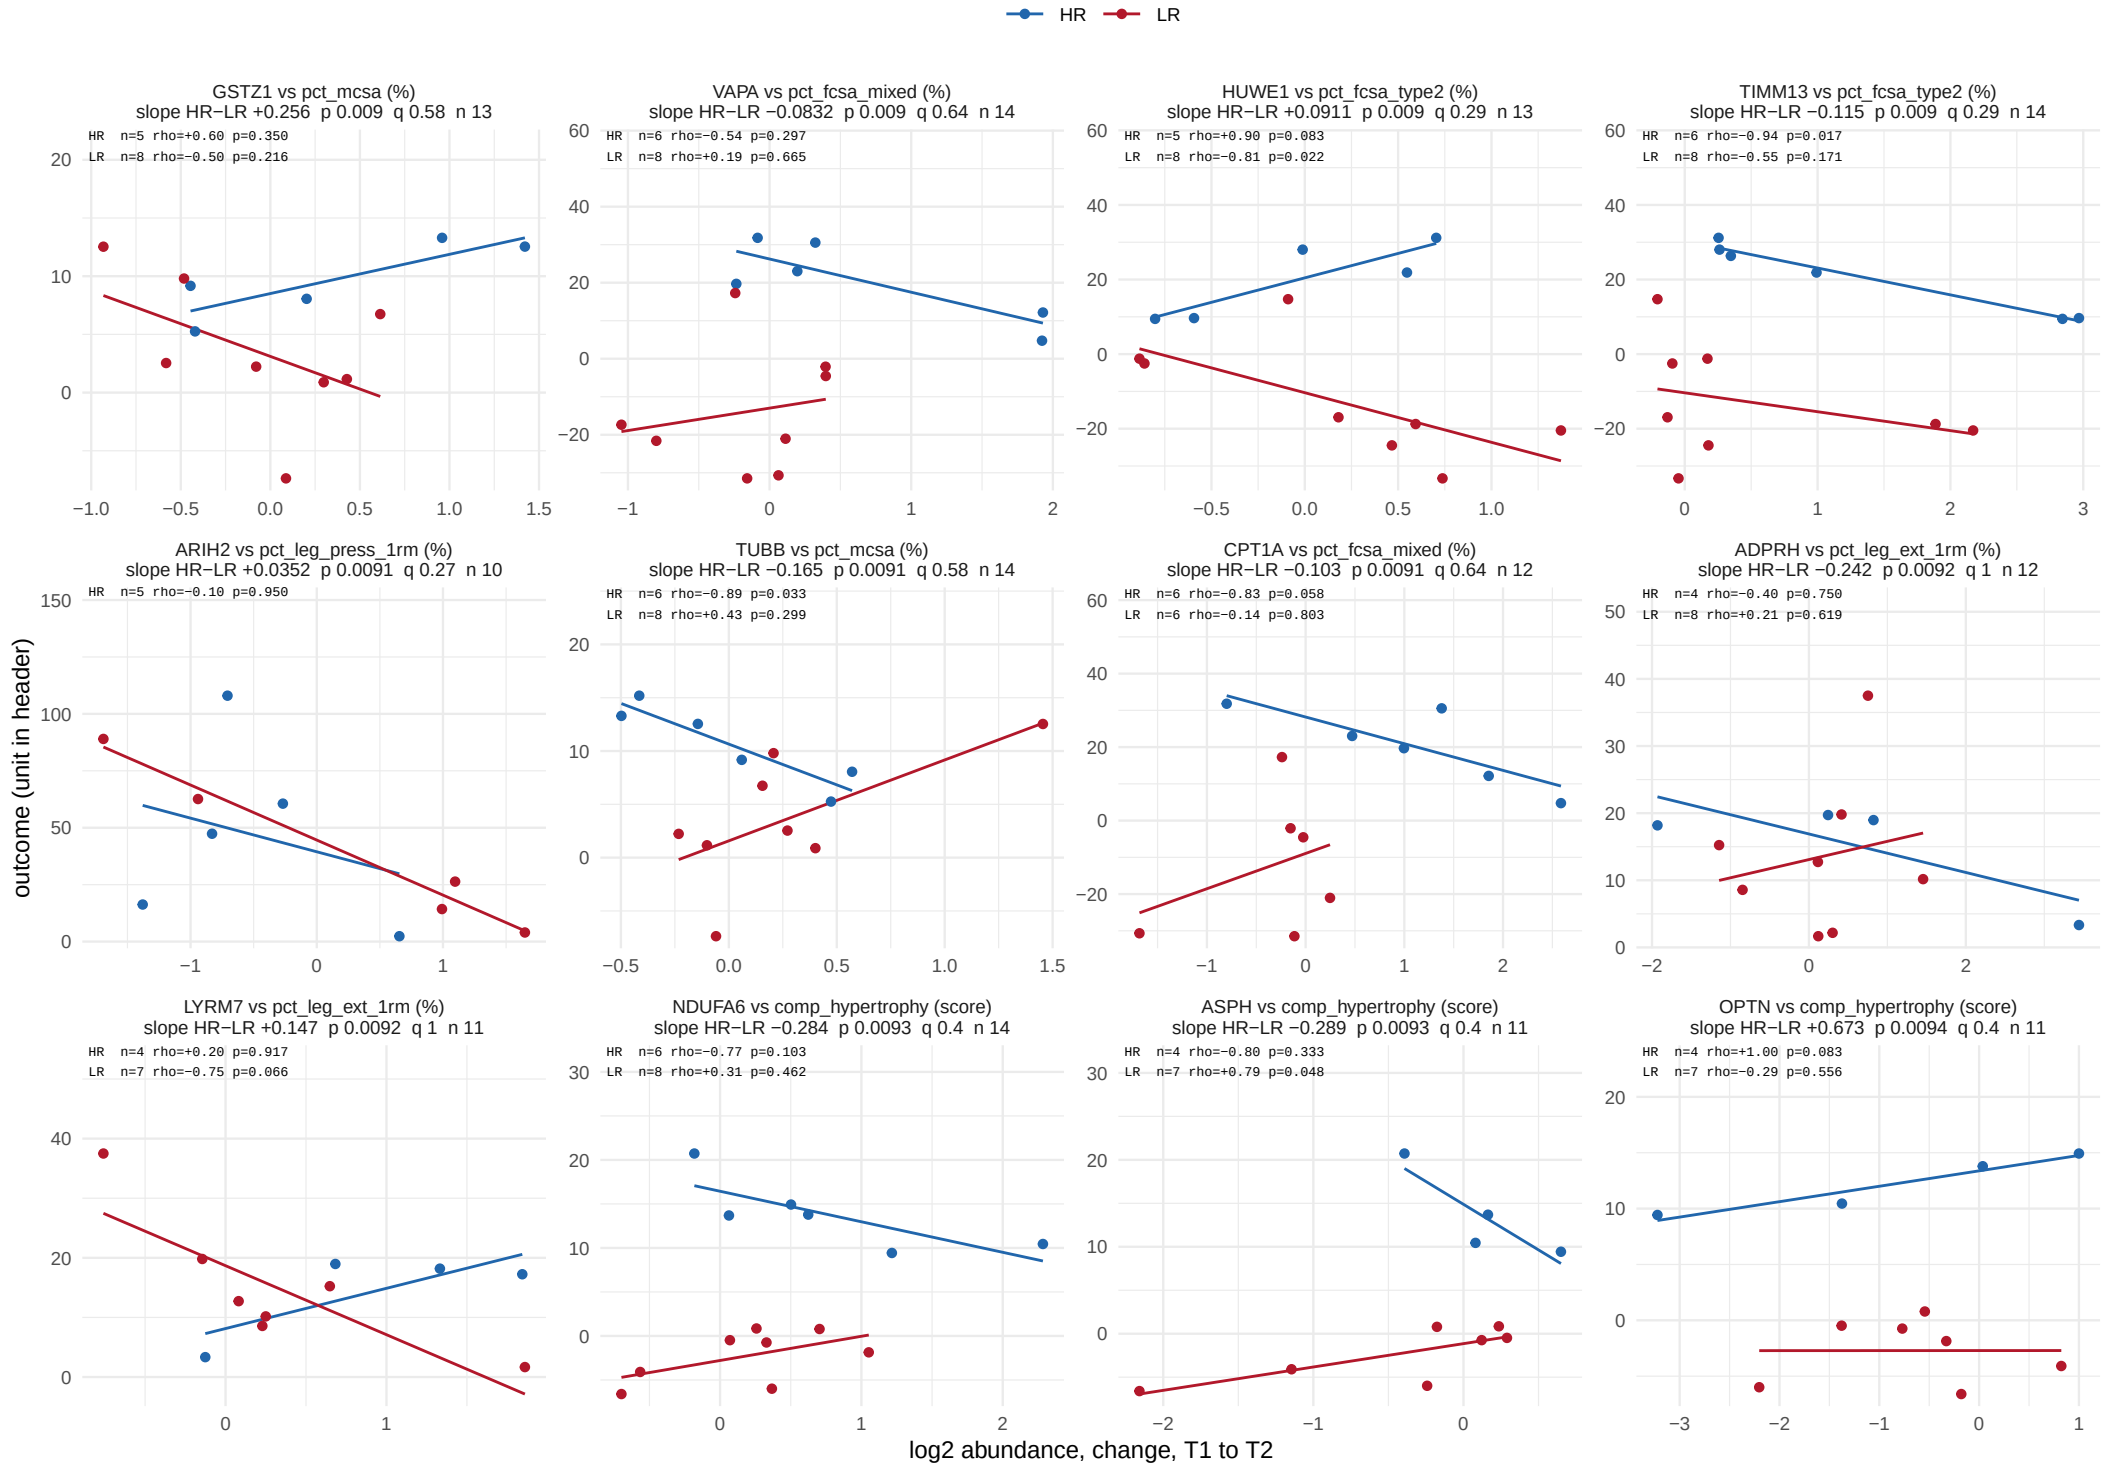

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


735 of 11282 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 17 of 62.

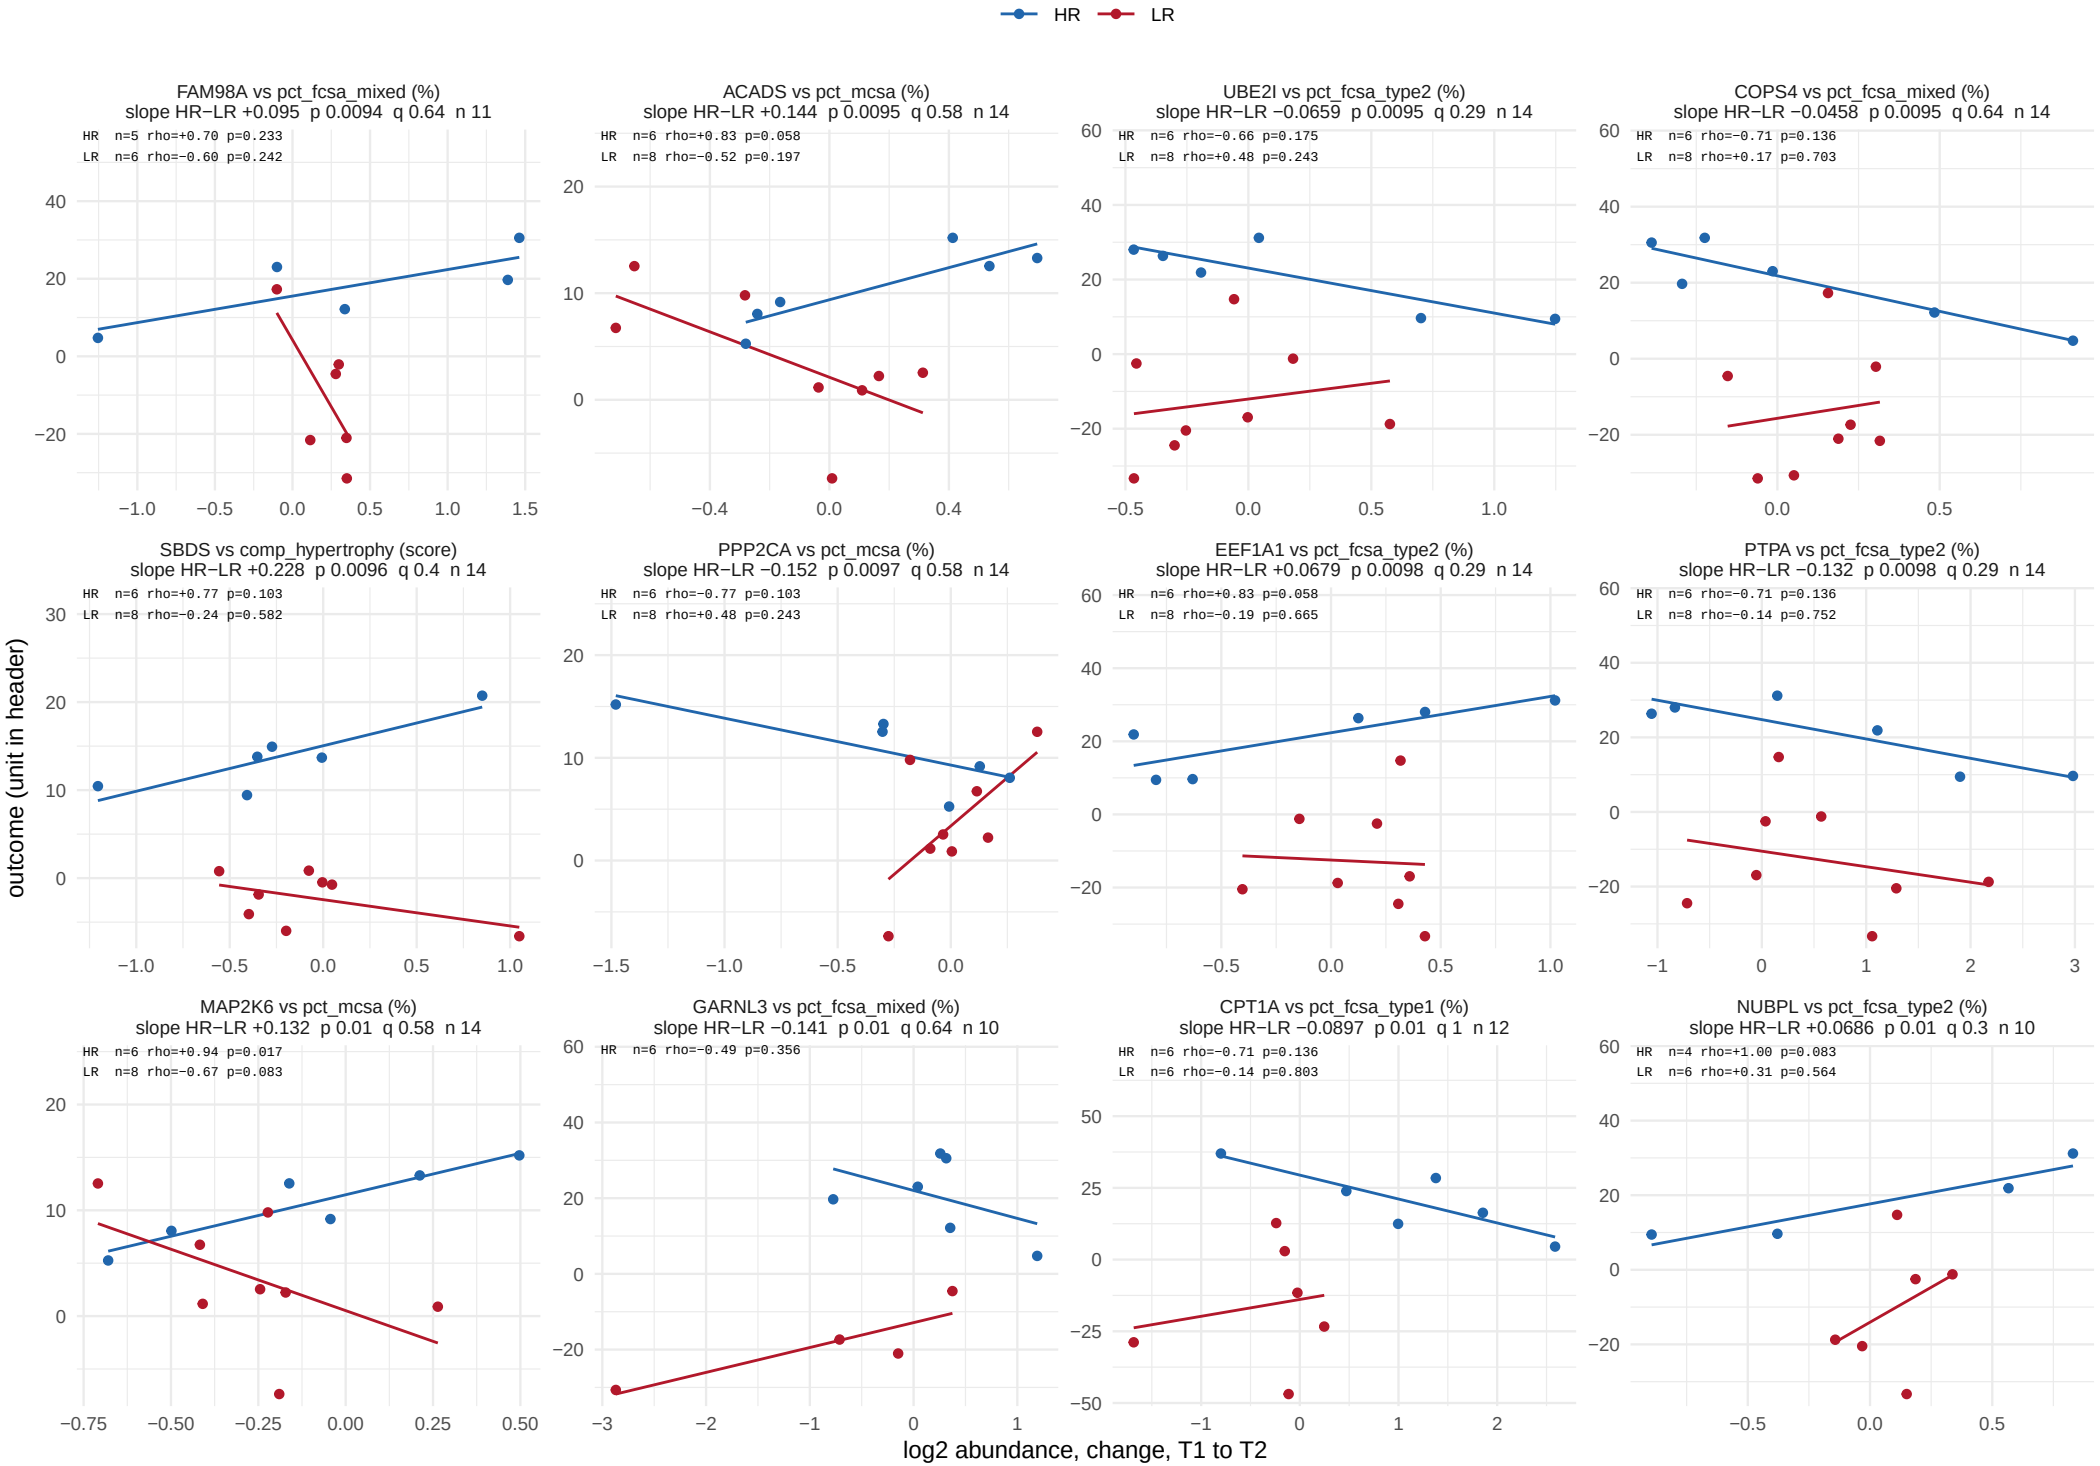

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


735 of 11282 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 18 of 62.

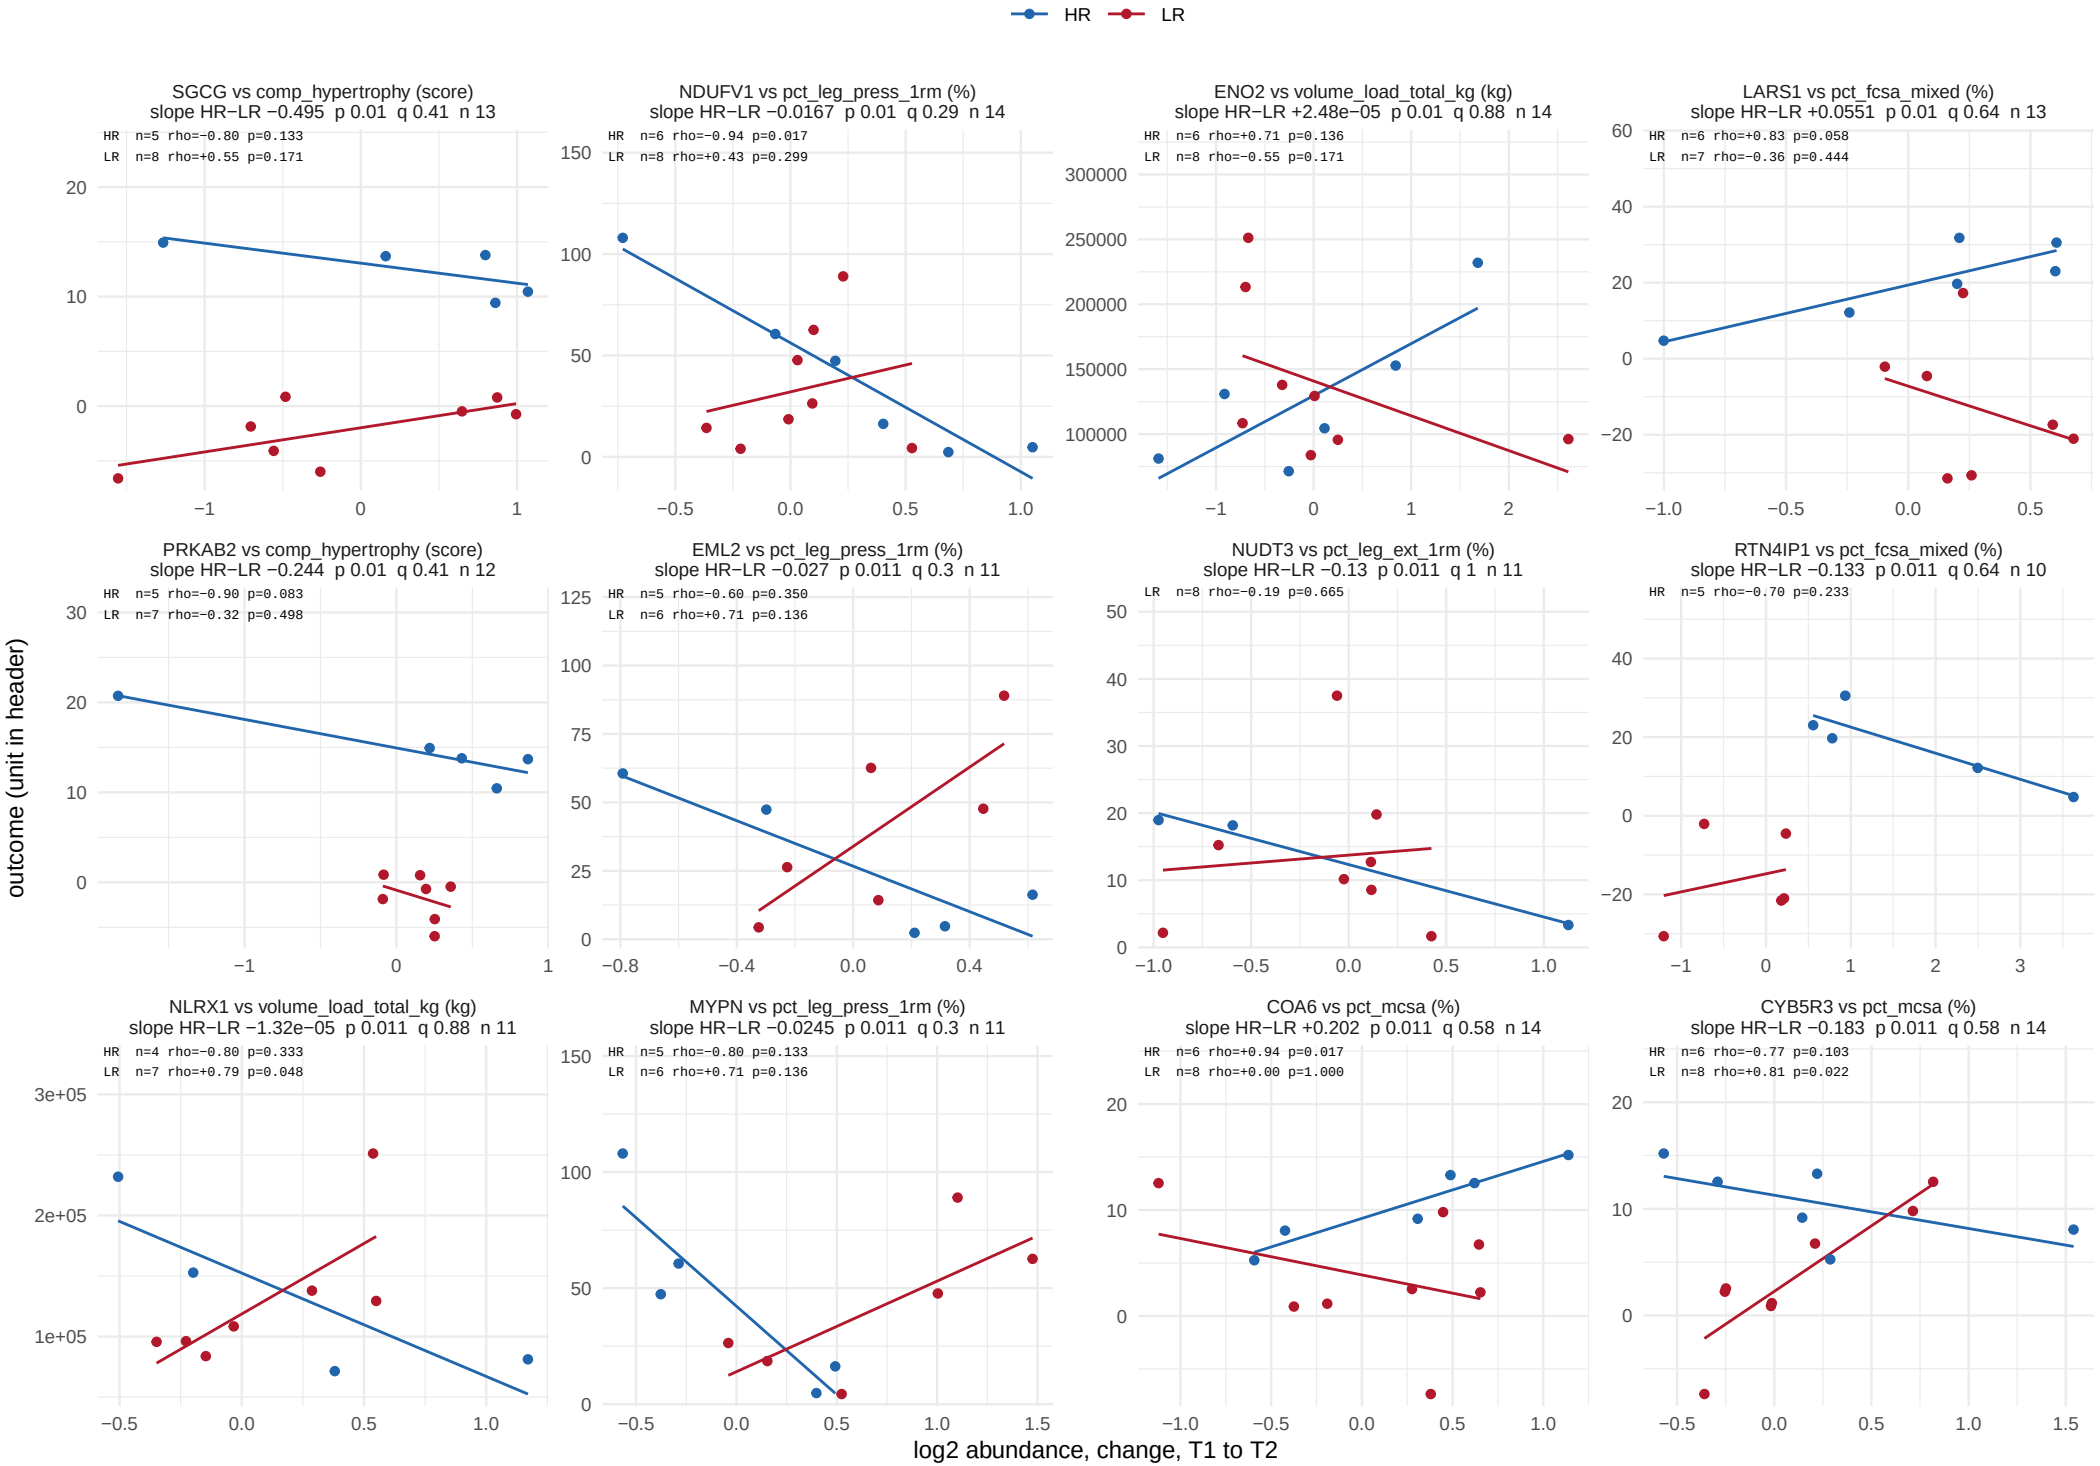

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


735 of 11282 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 19 of 62.

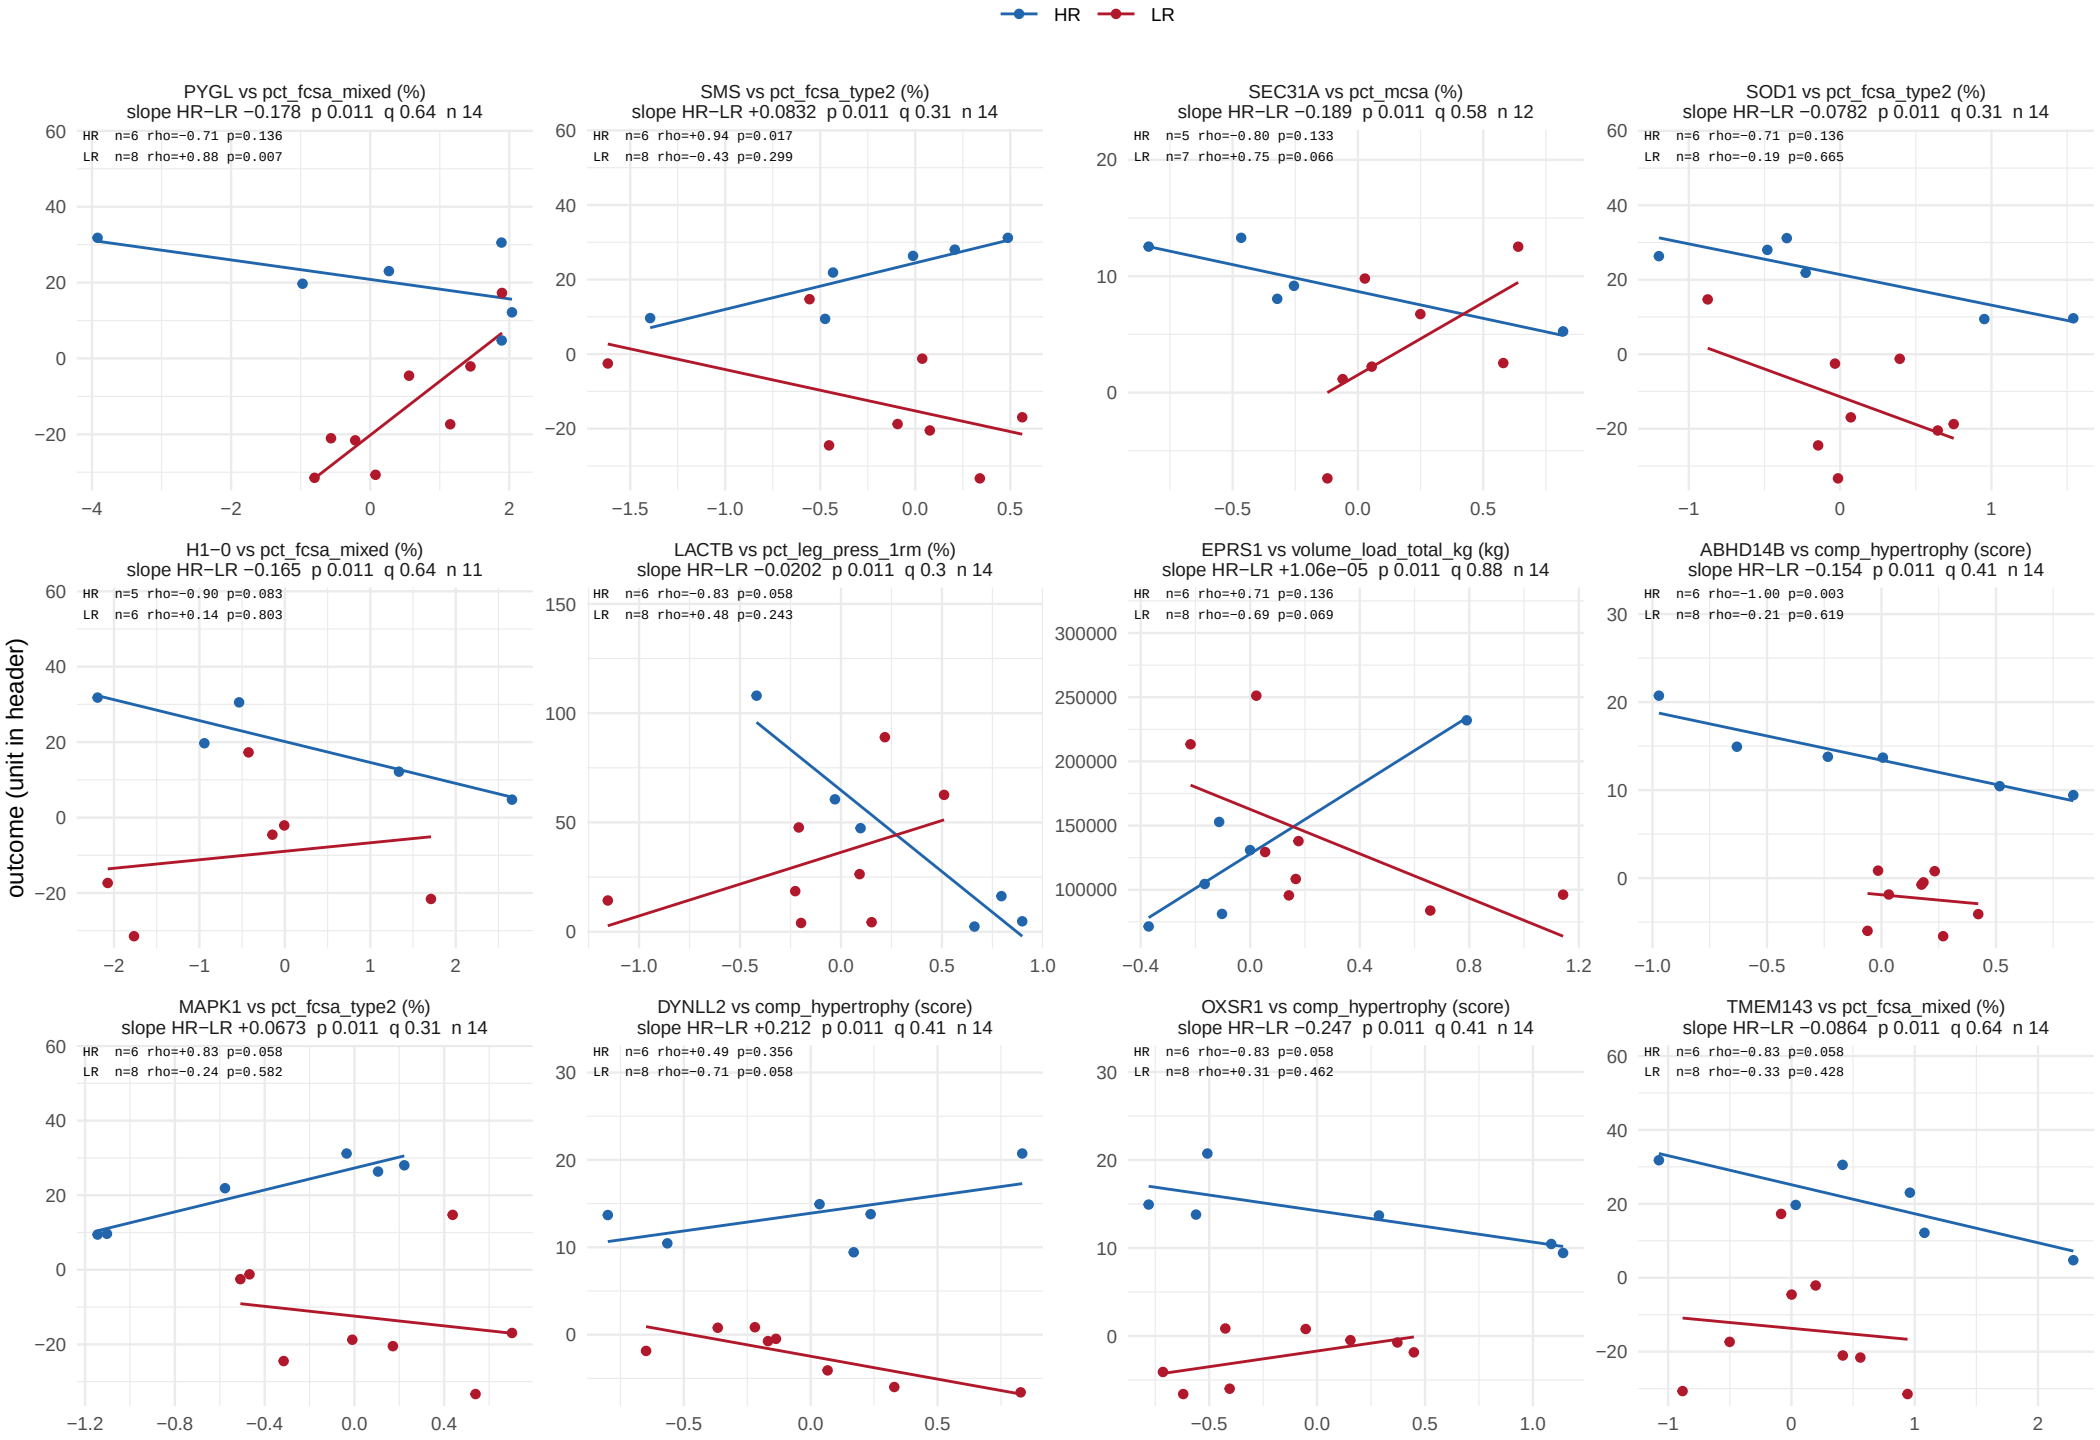

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


735 of 11282 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 20 of 62.

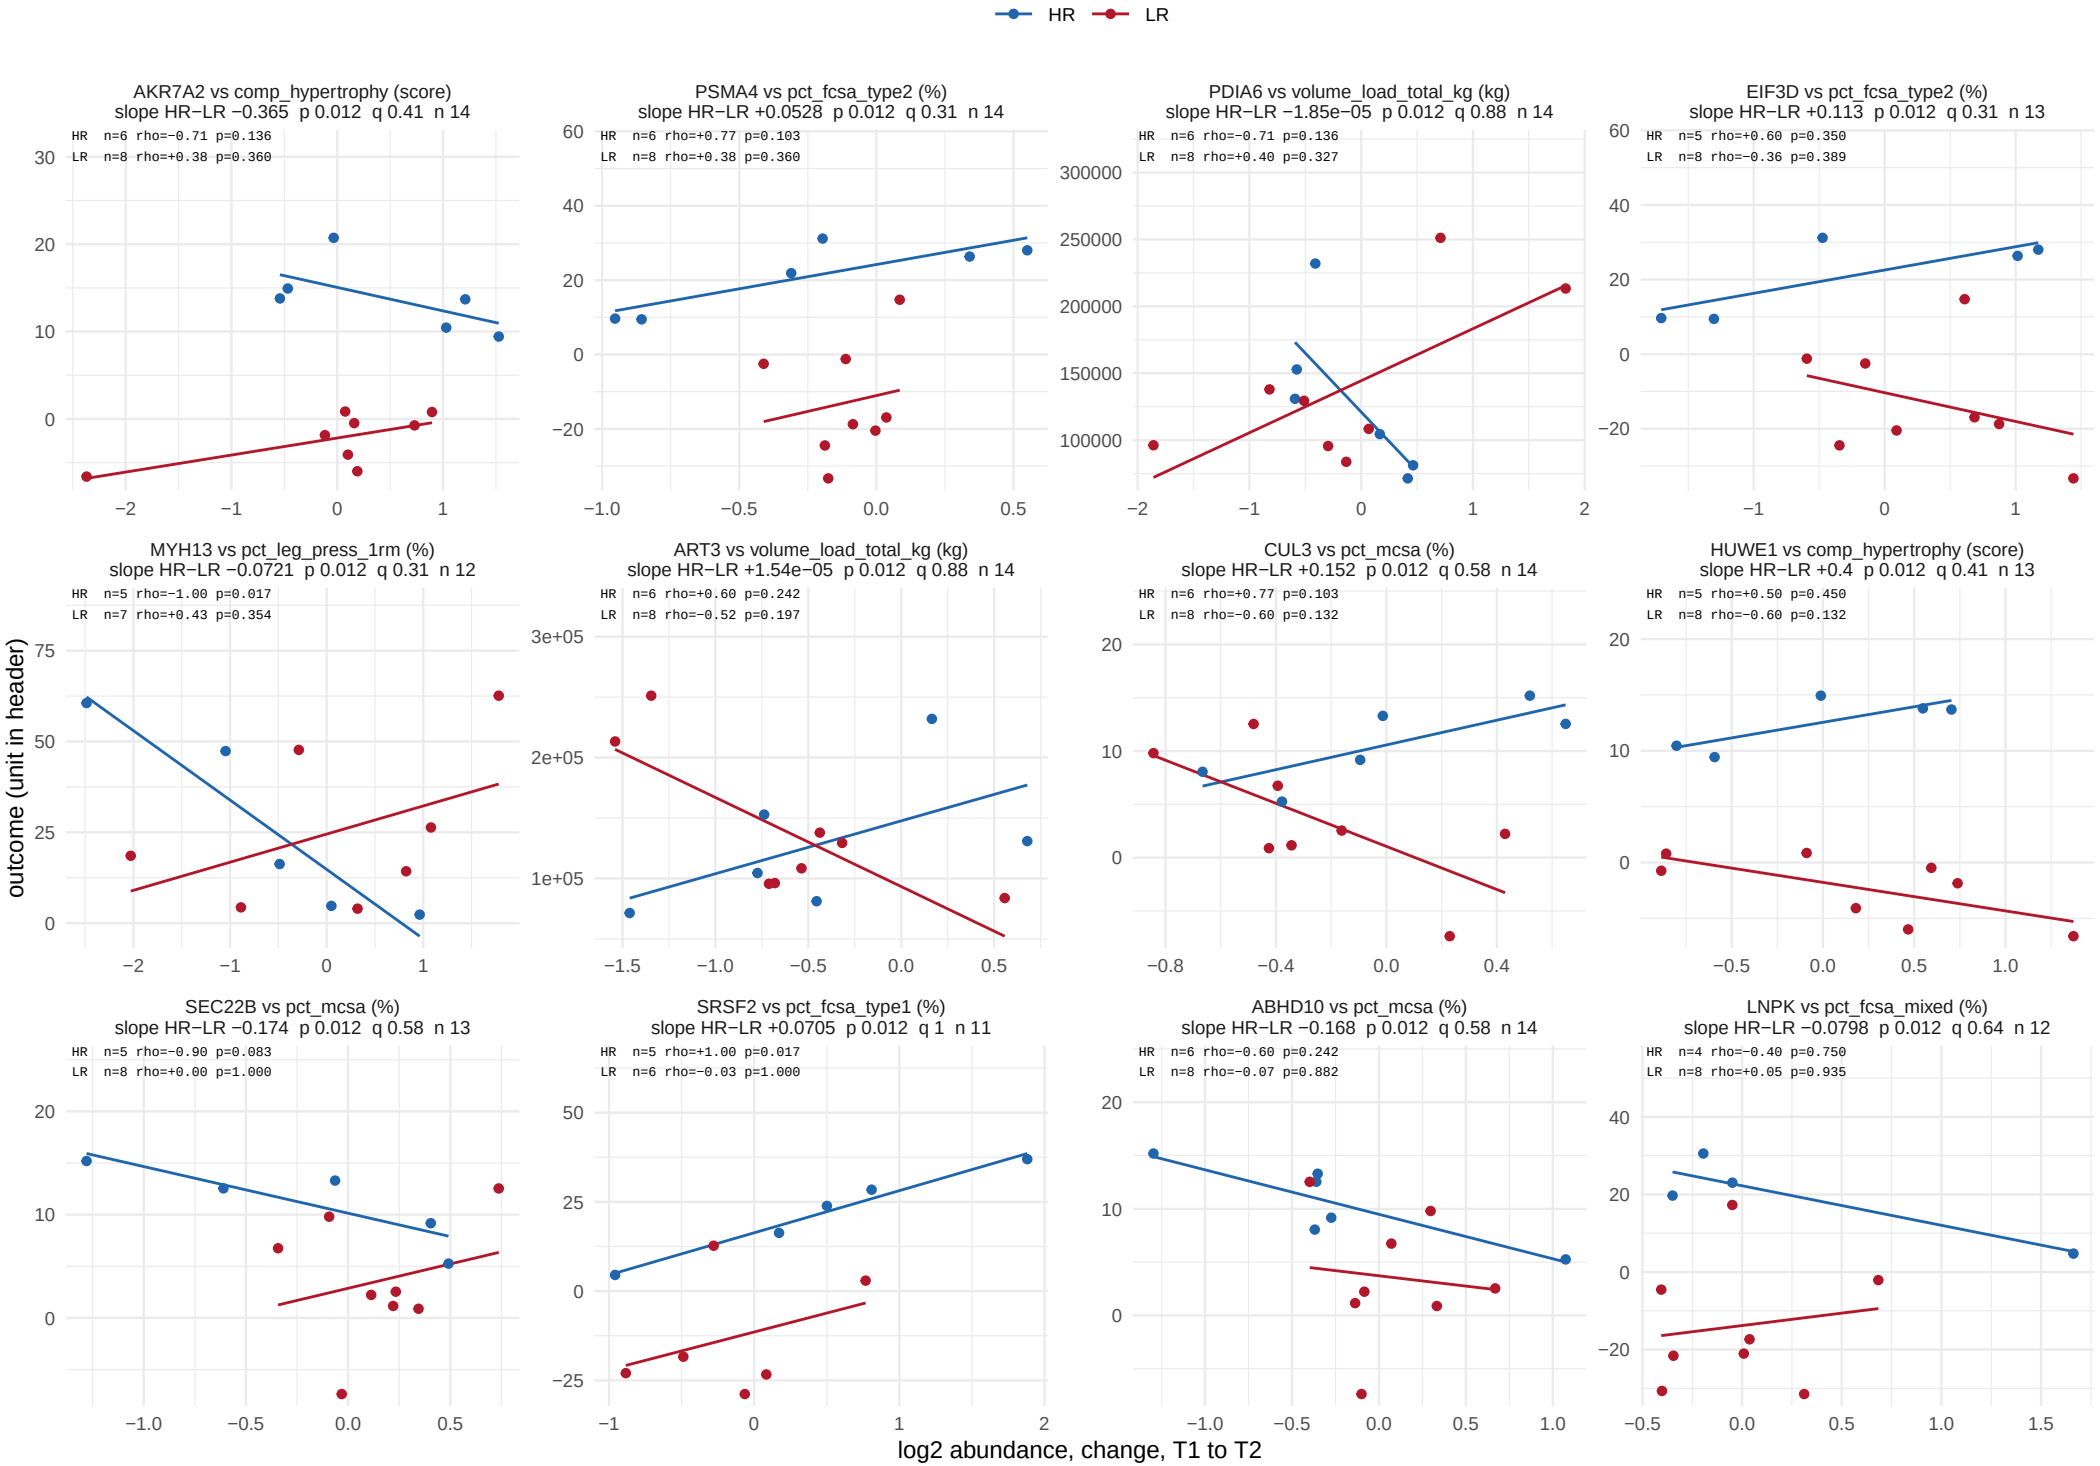

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


735 of 11282 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 21 of 62.

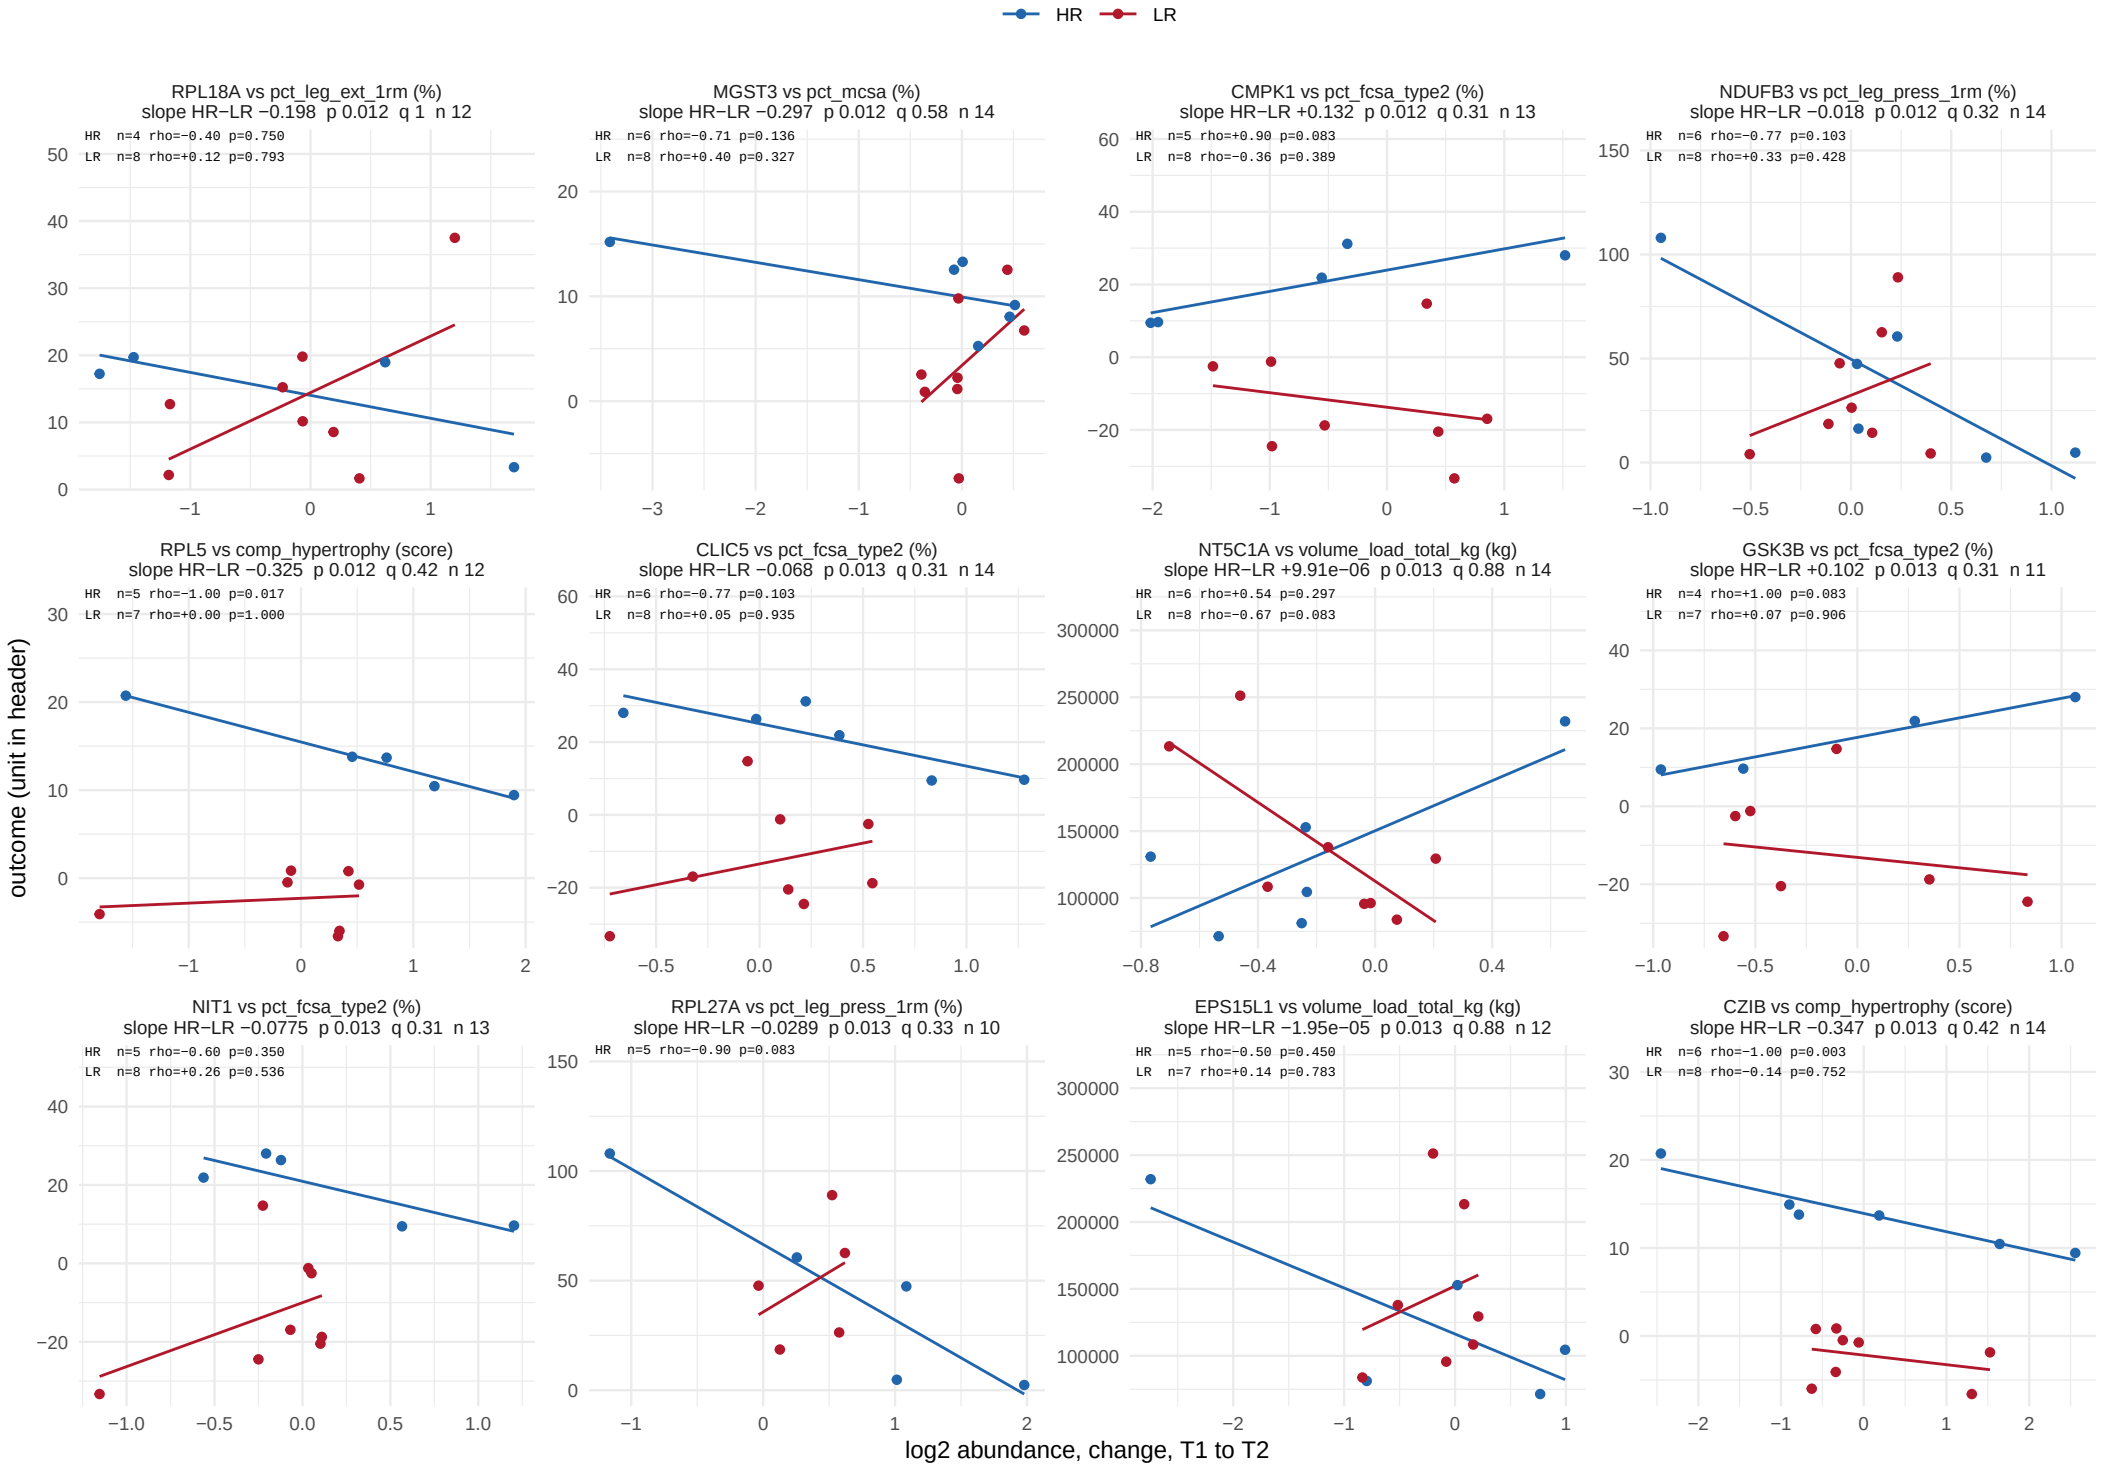

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


735 of 11282 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 22 of 62.

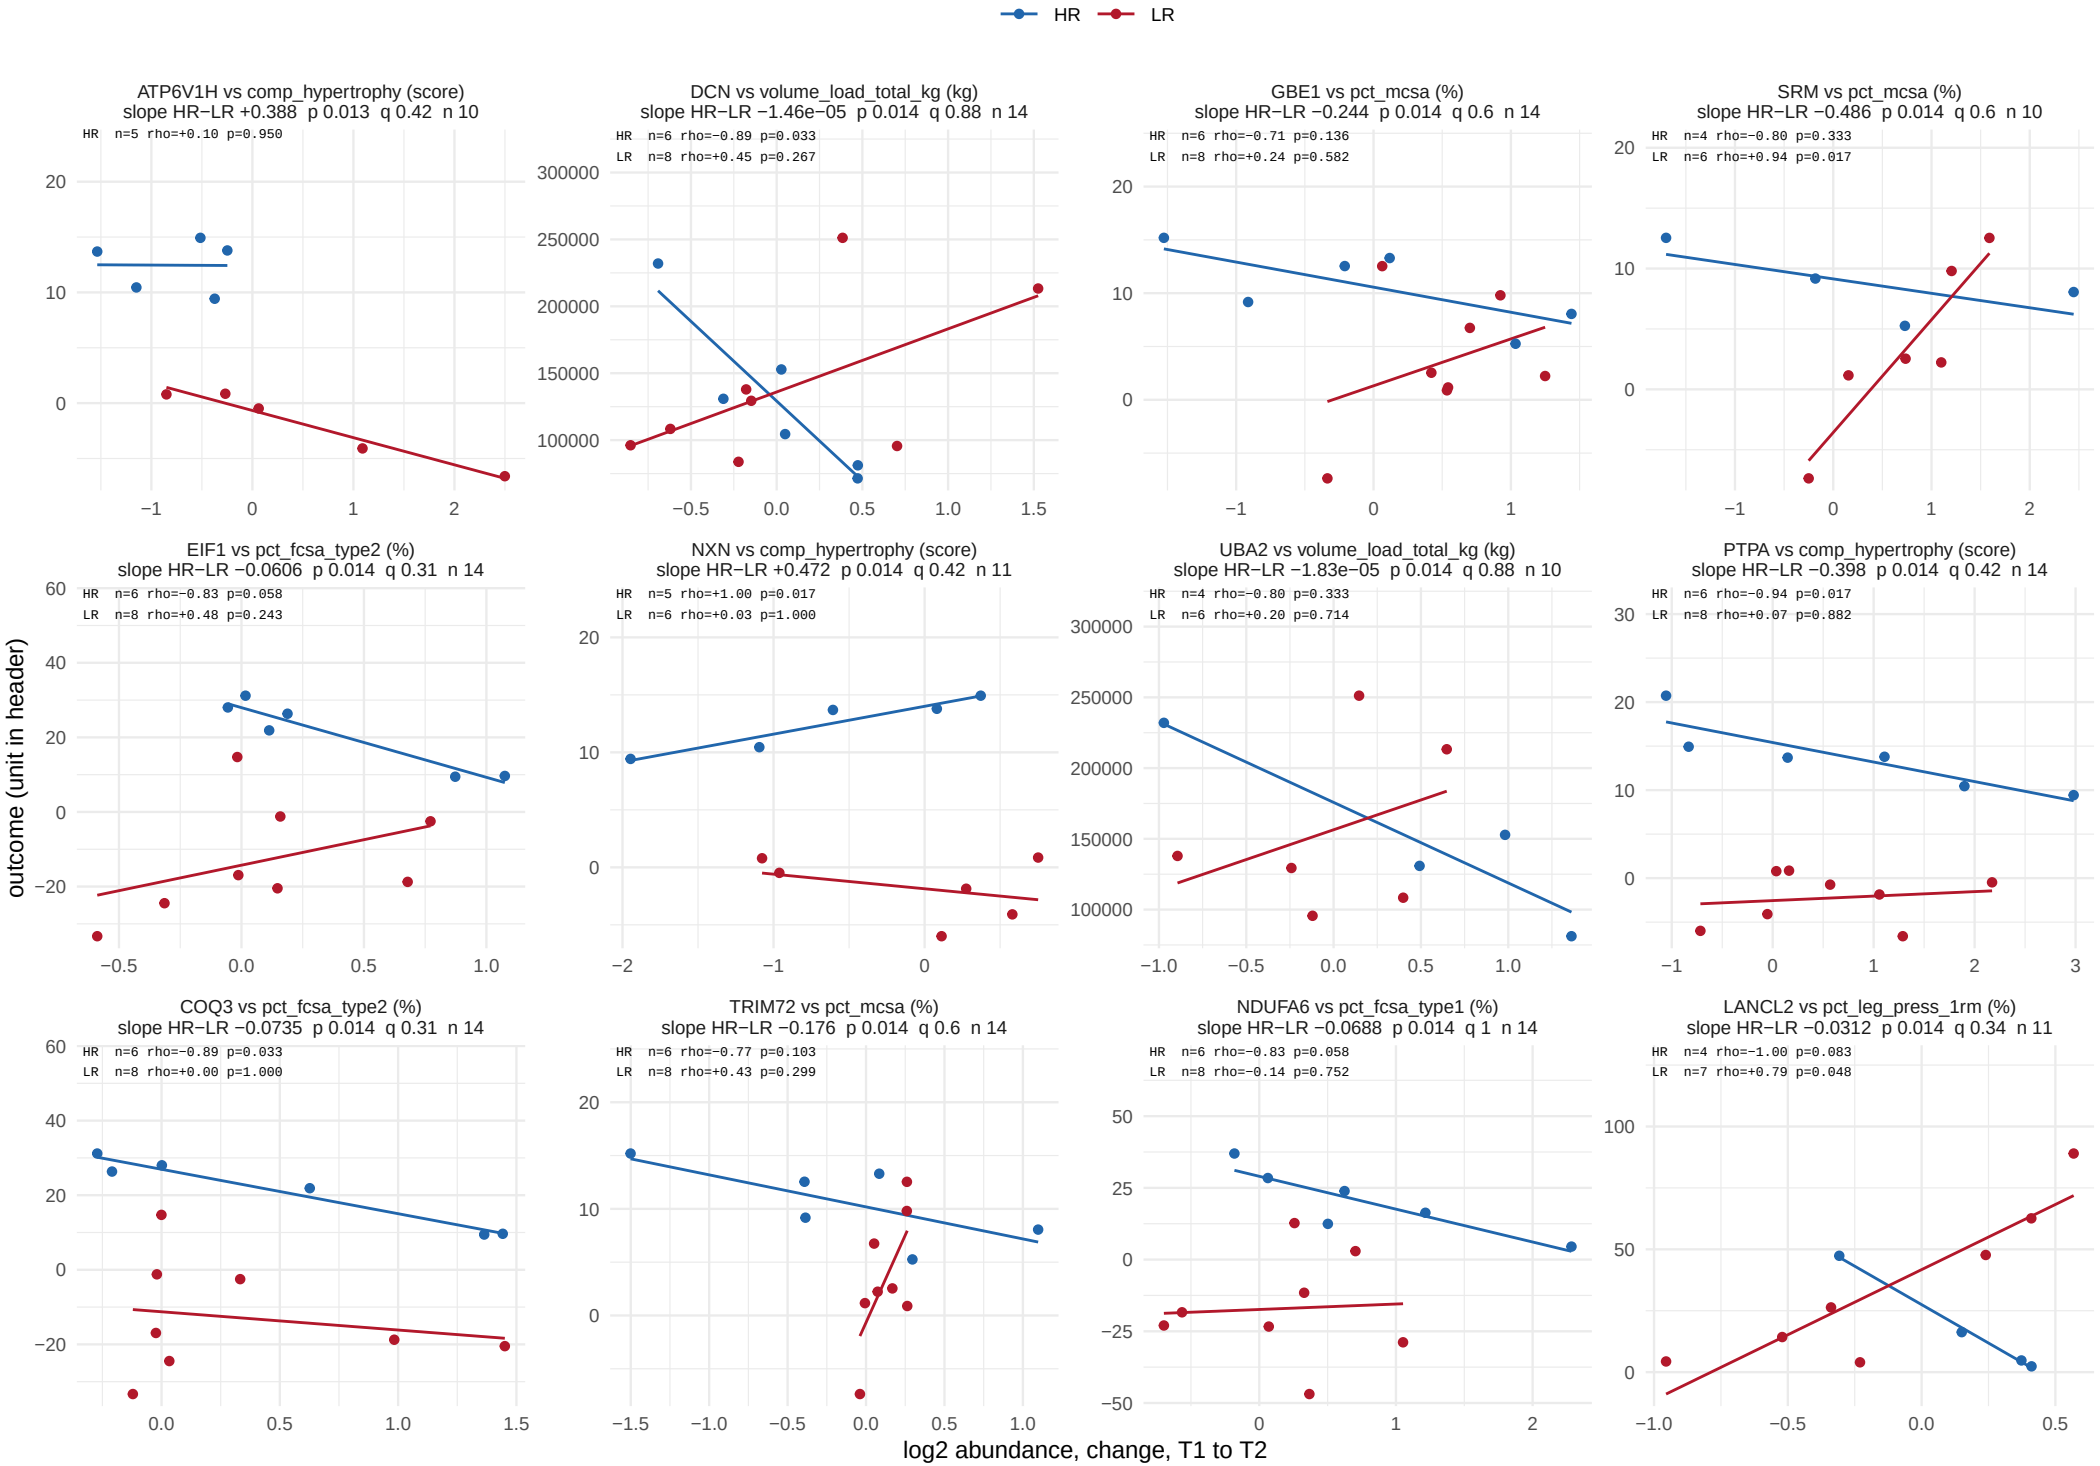

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


735 of 11282 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 23 of 62.

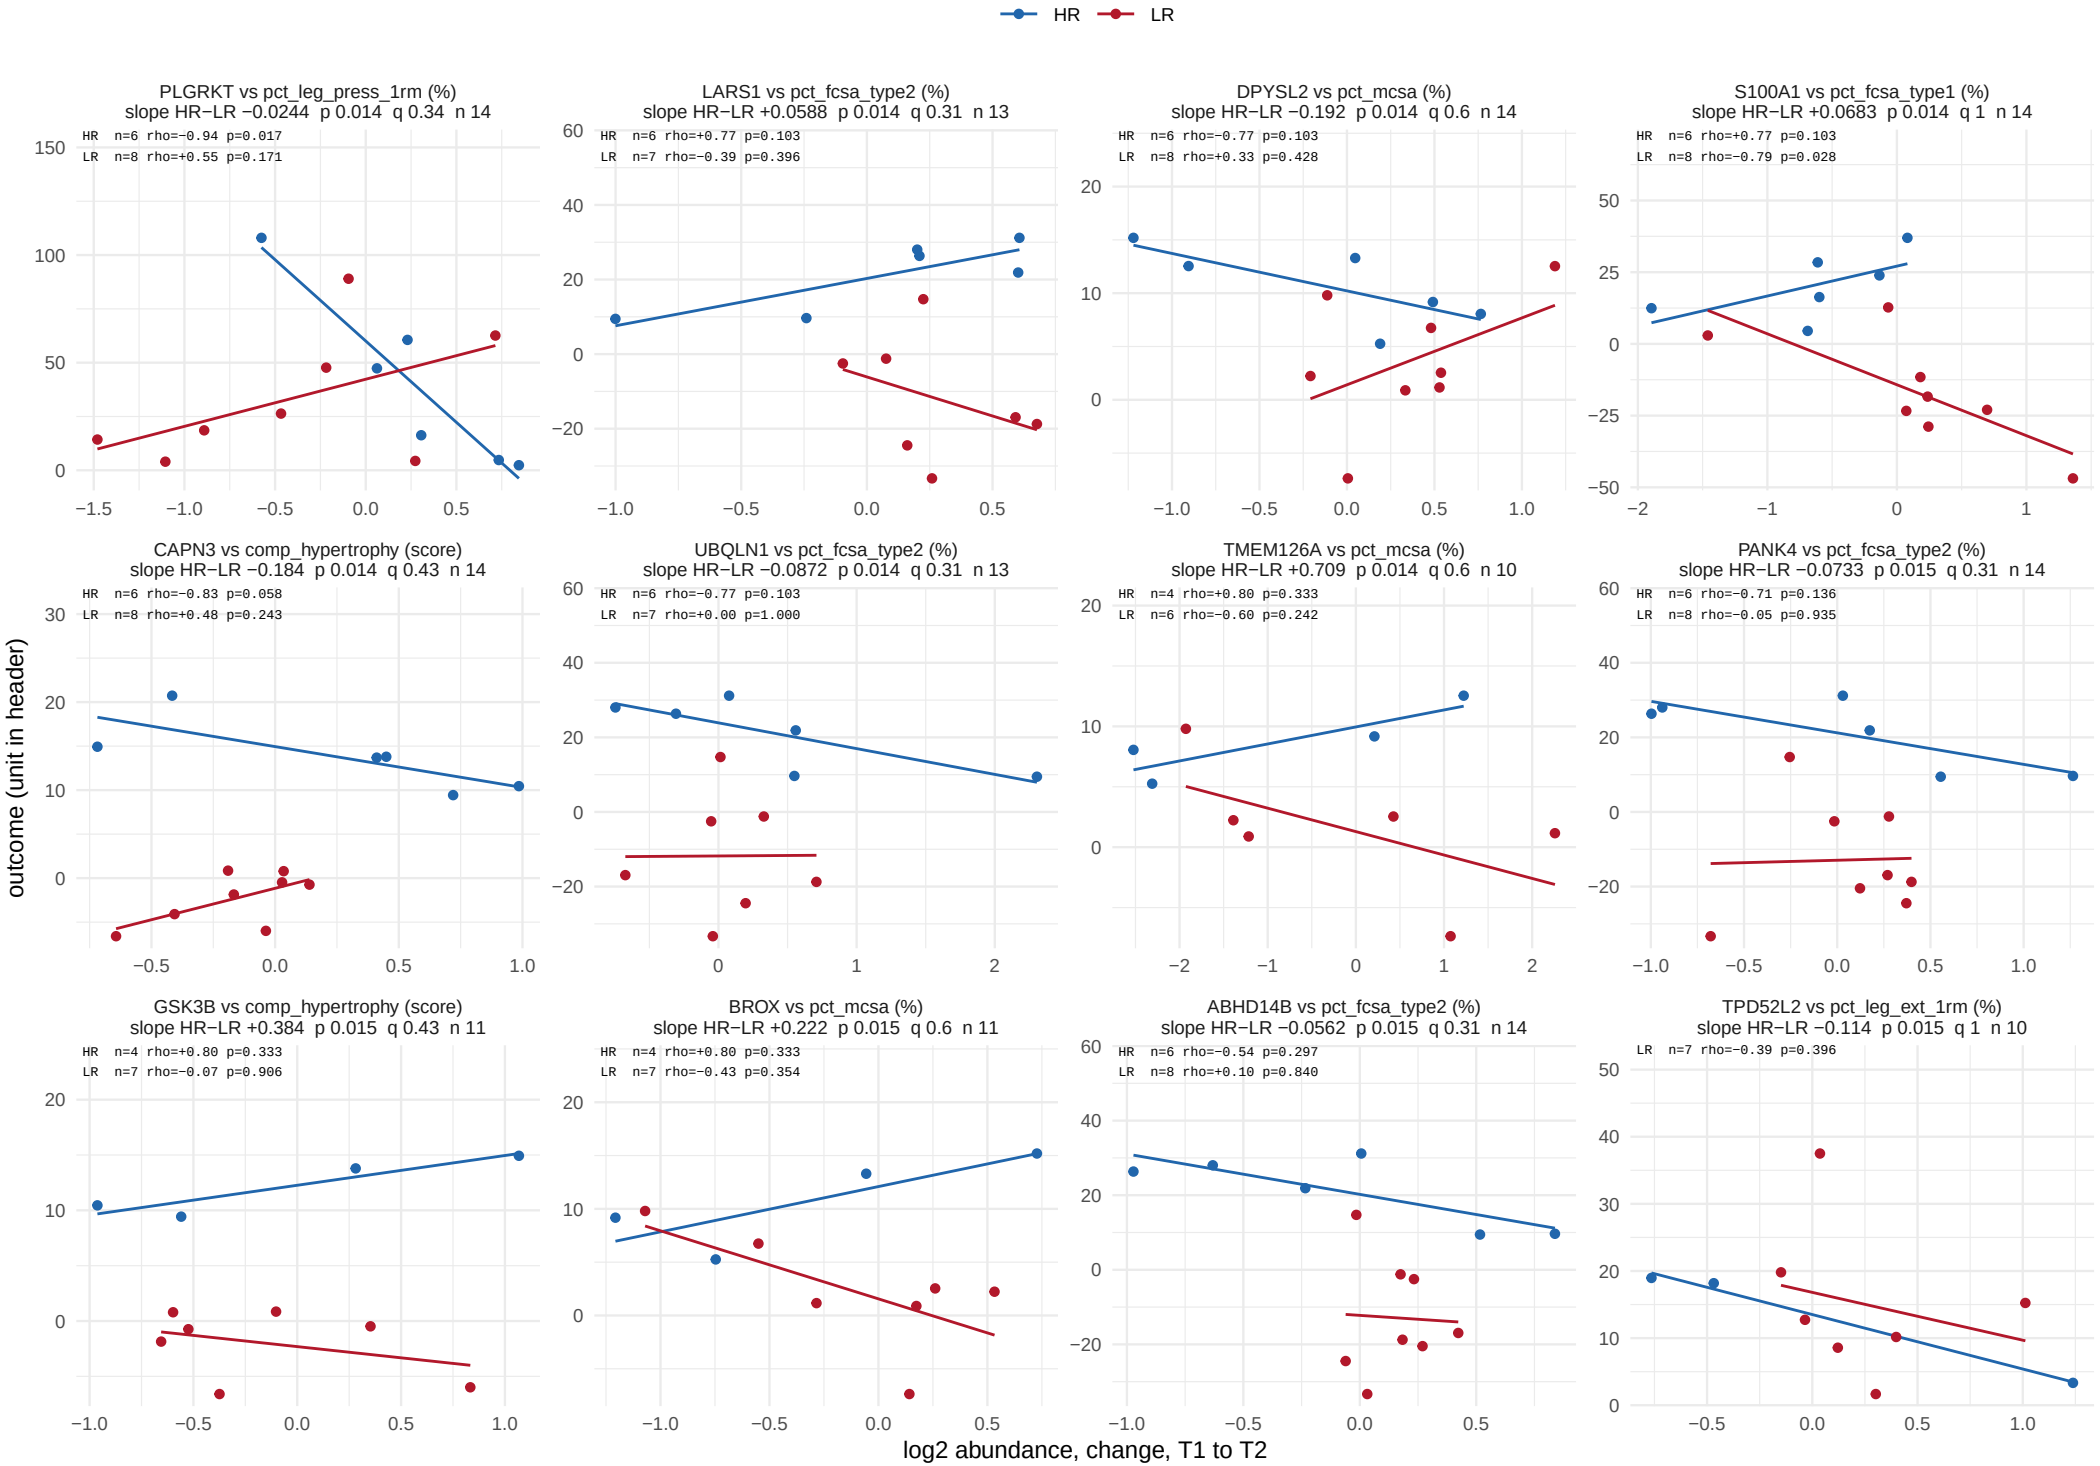

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


735 of 11282 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 24 of 62.

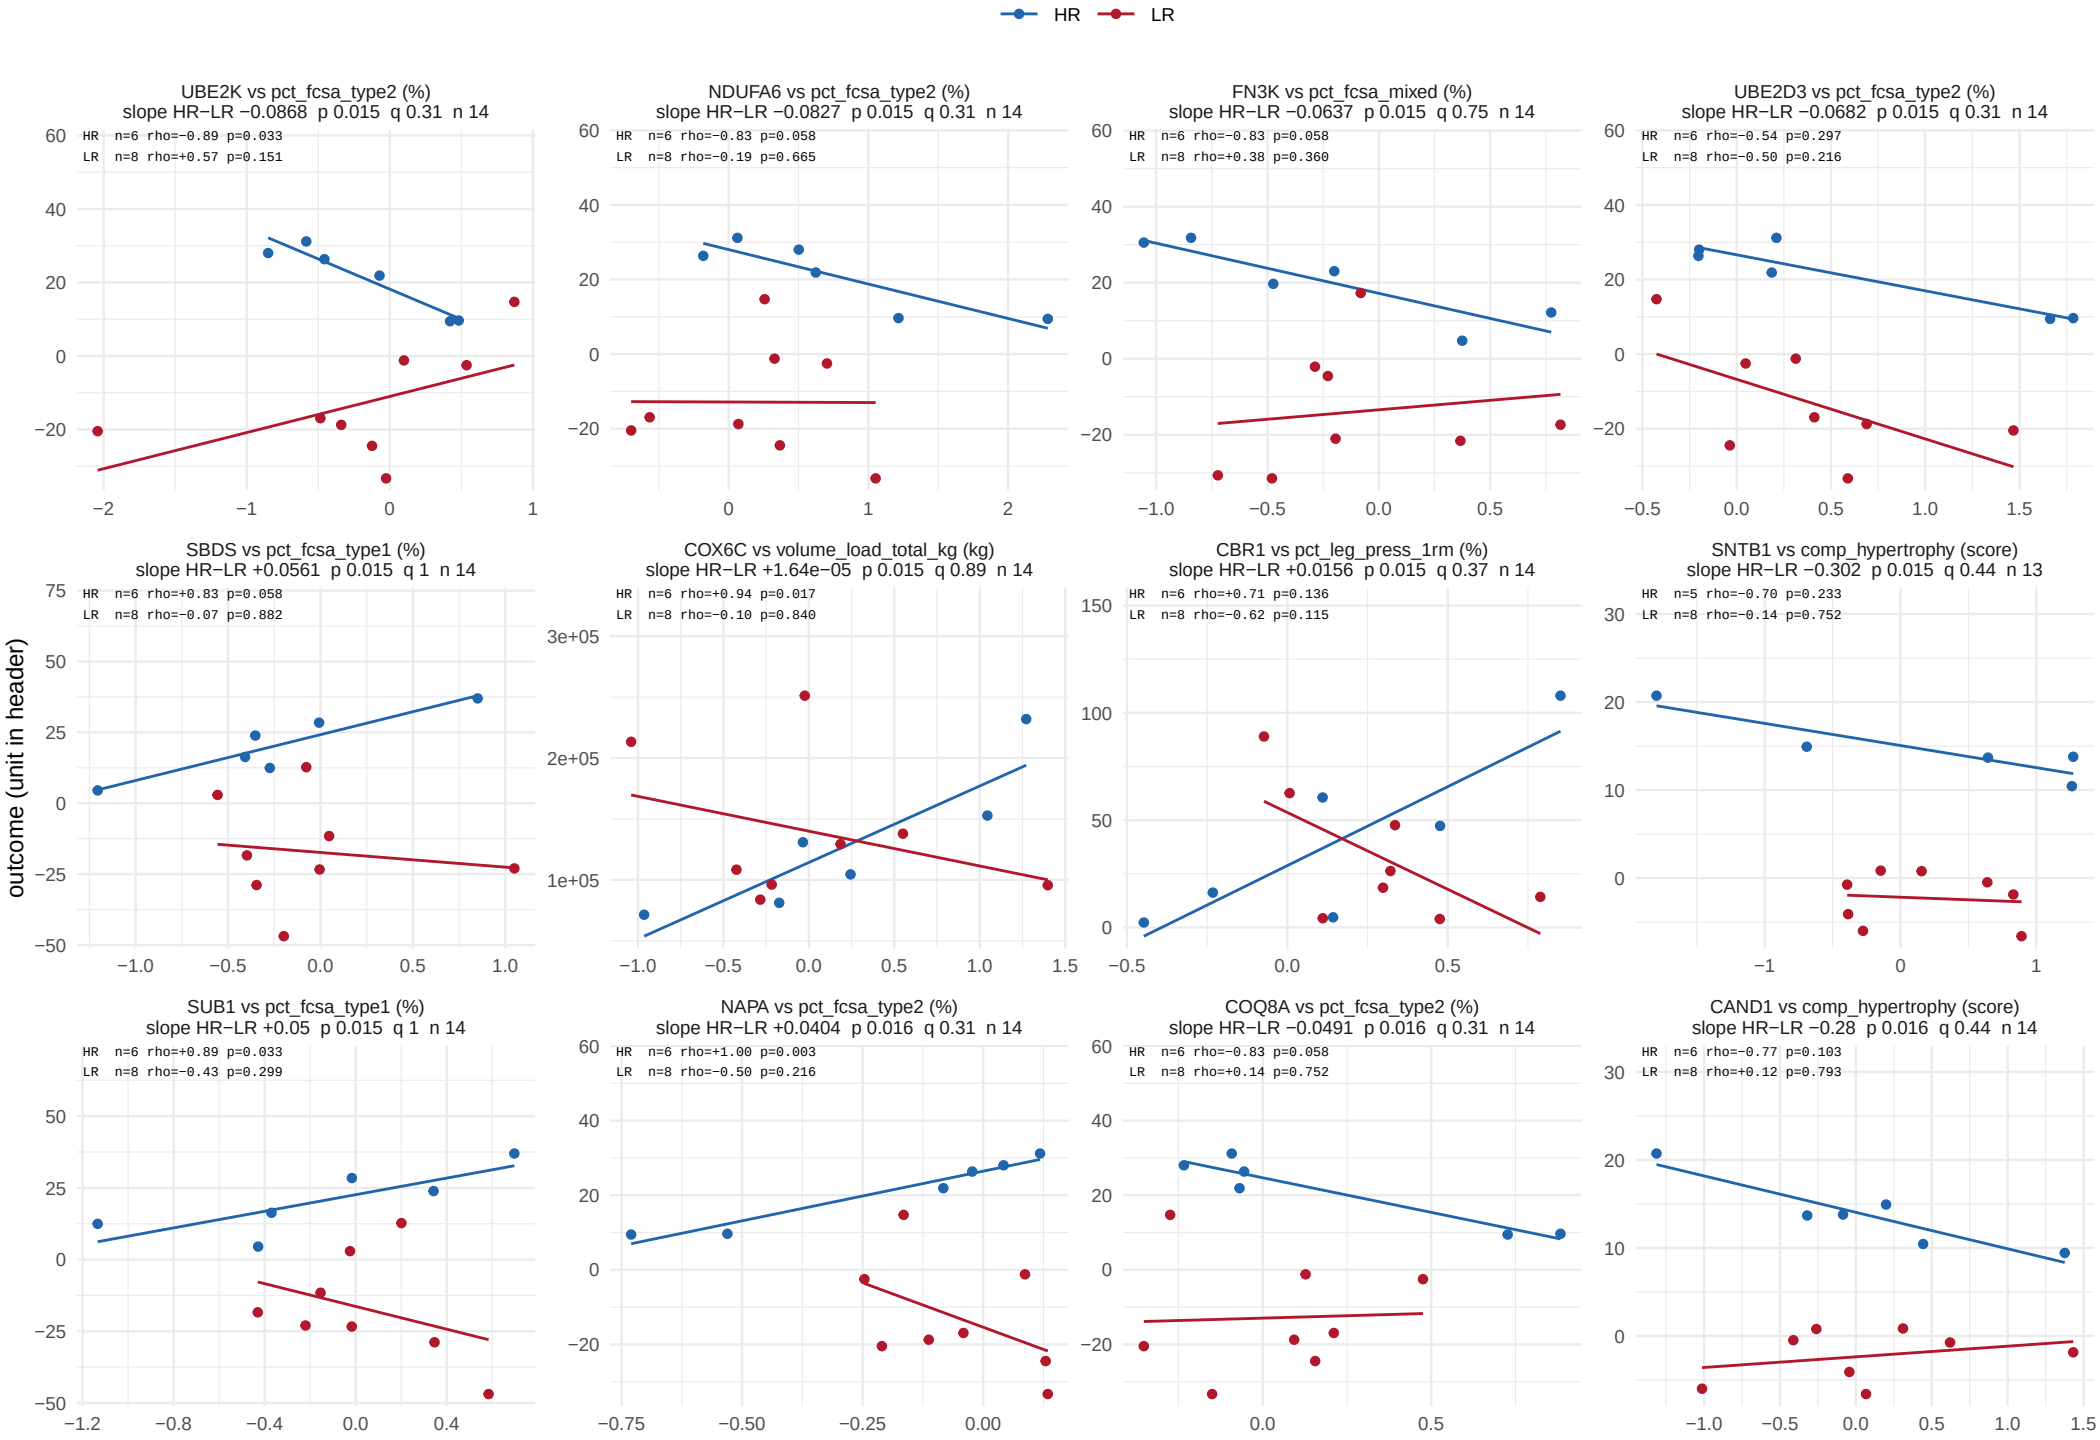

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


735 of 11282 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 25 of 62.

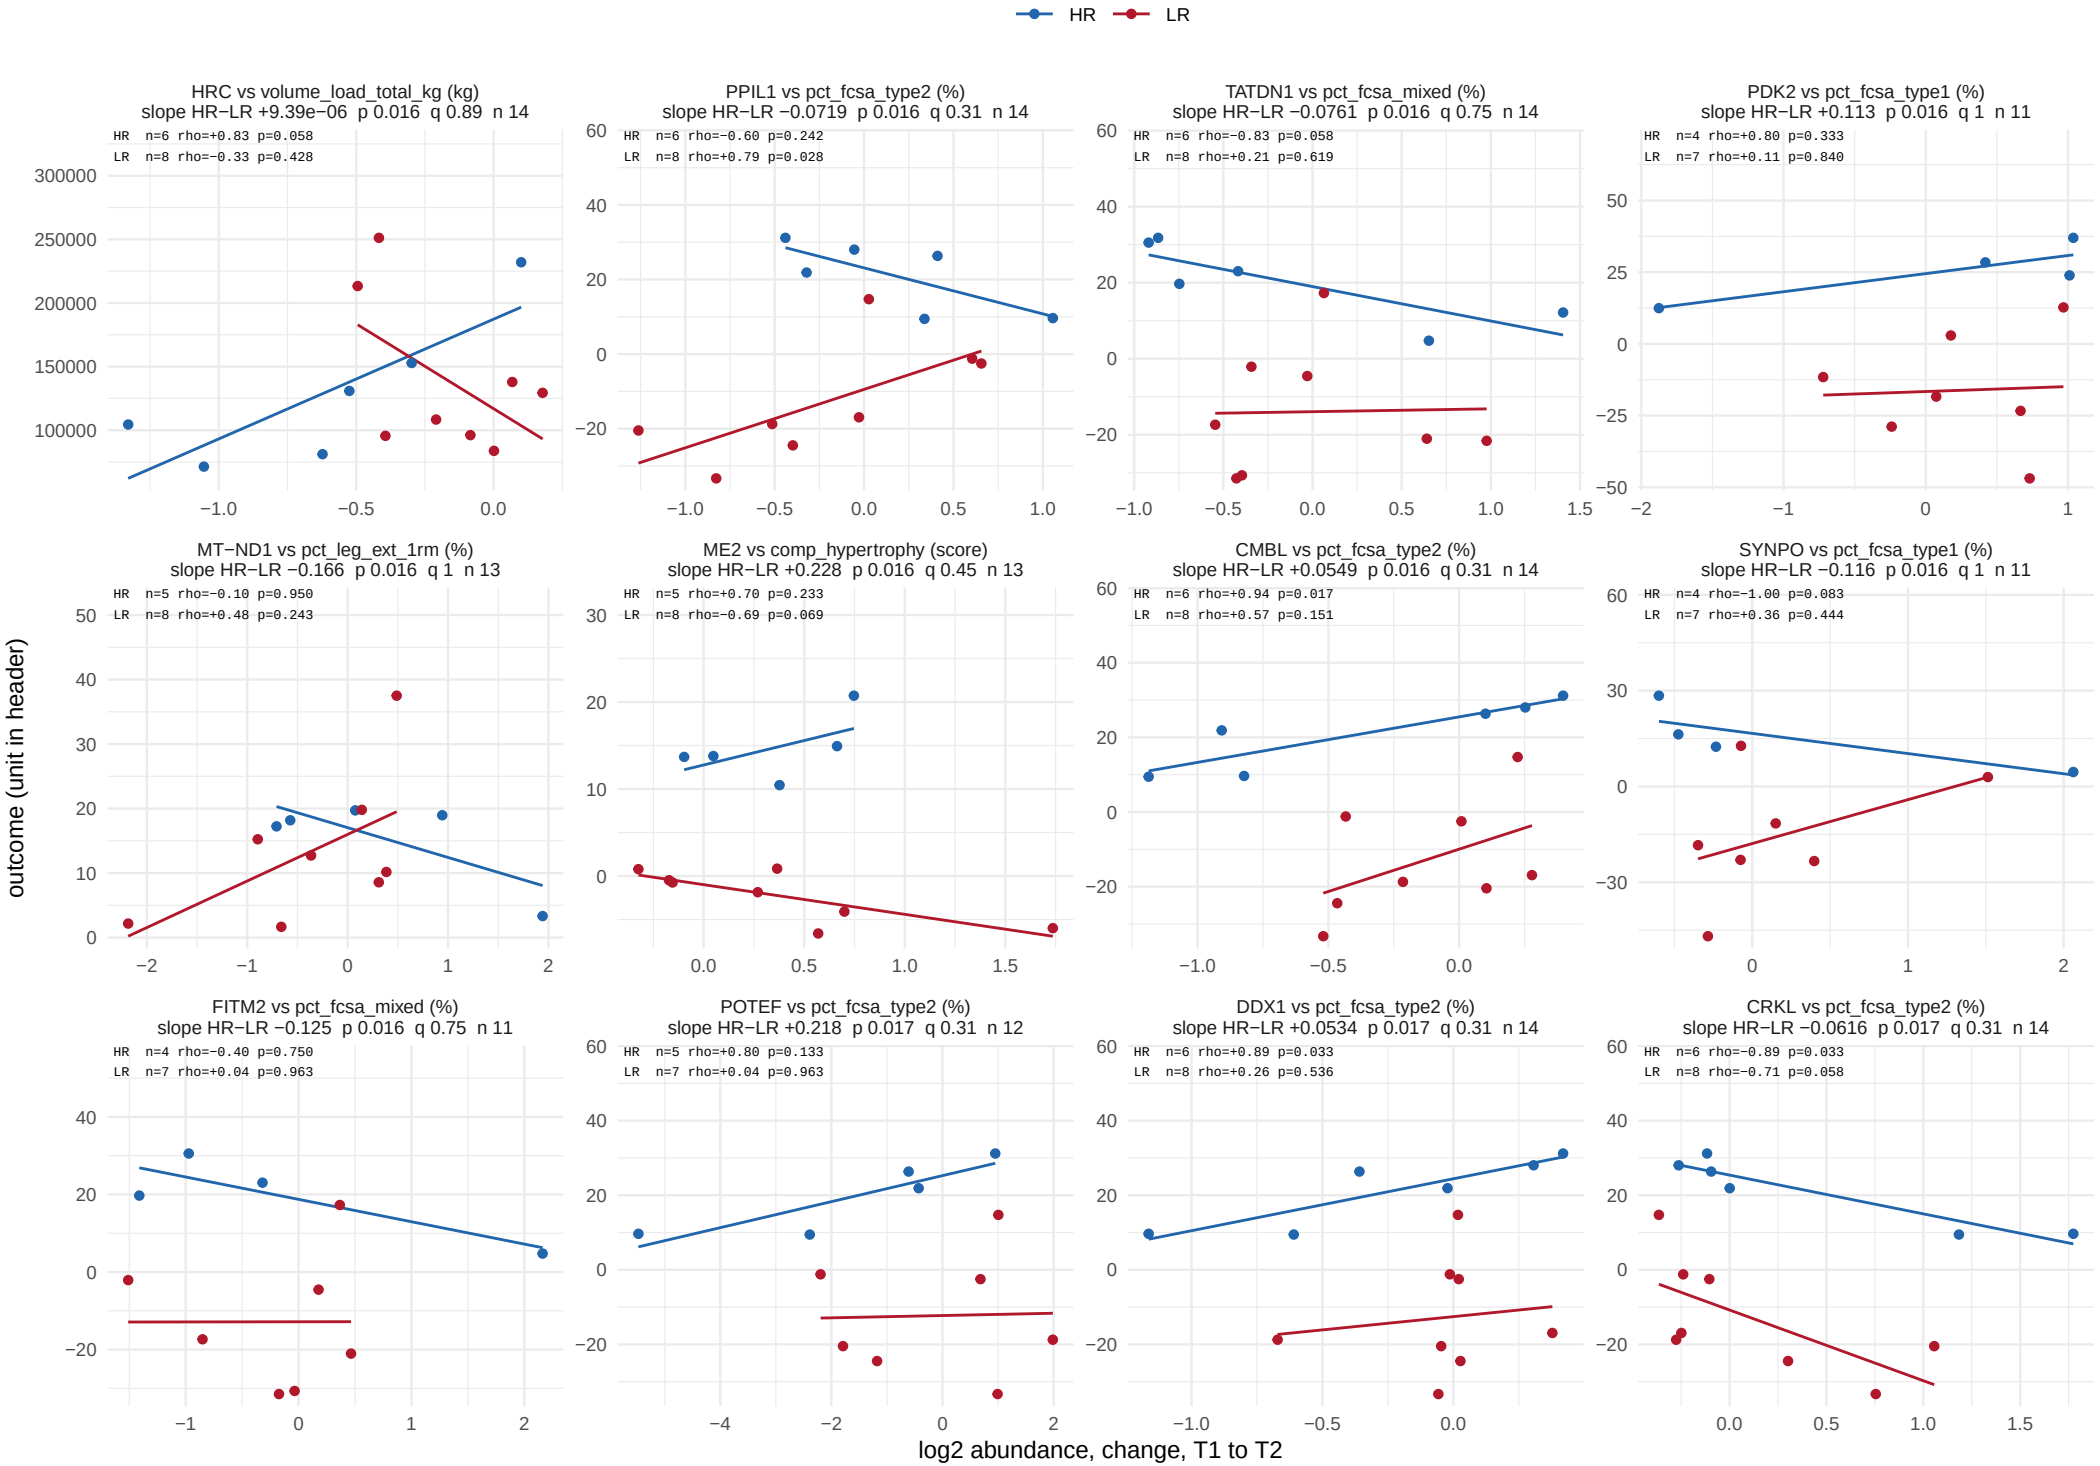

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


735 of 11282 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 26 of 62.

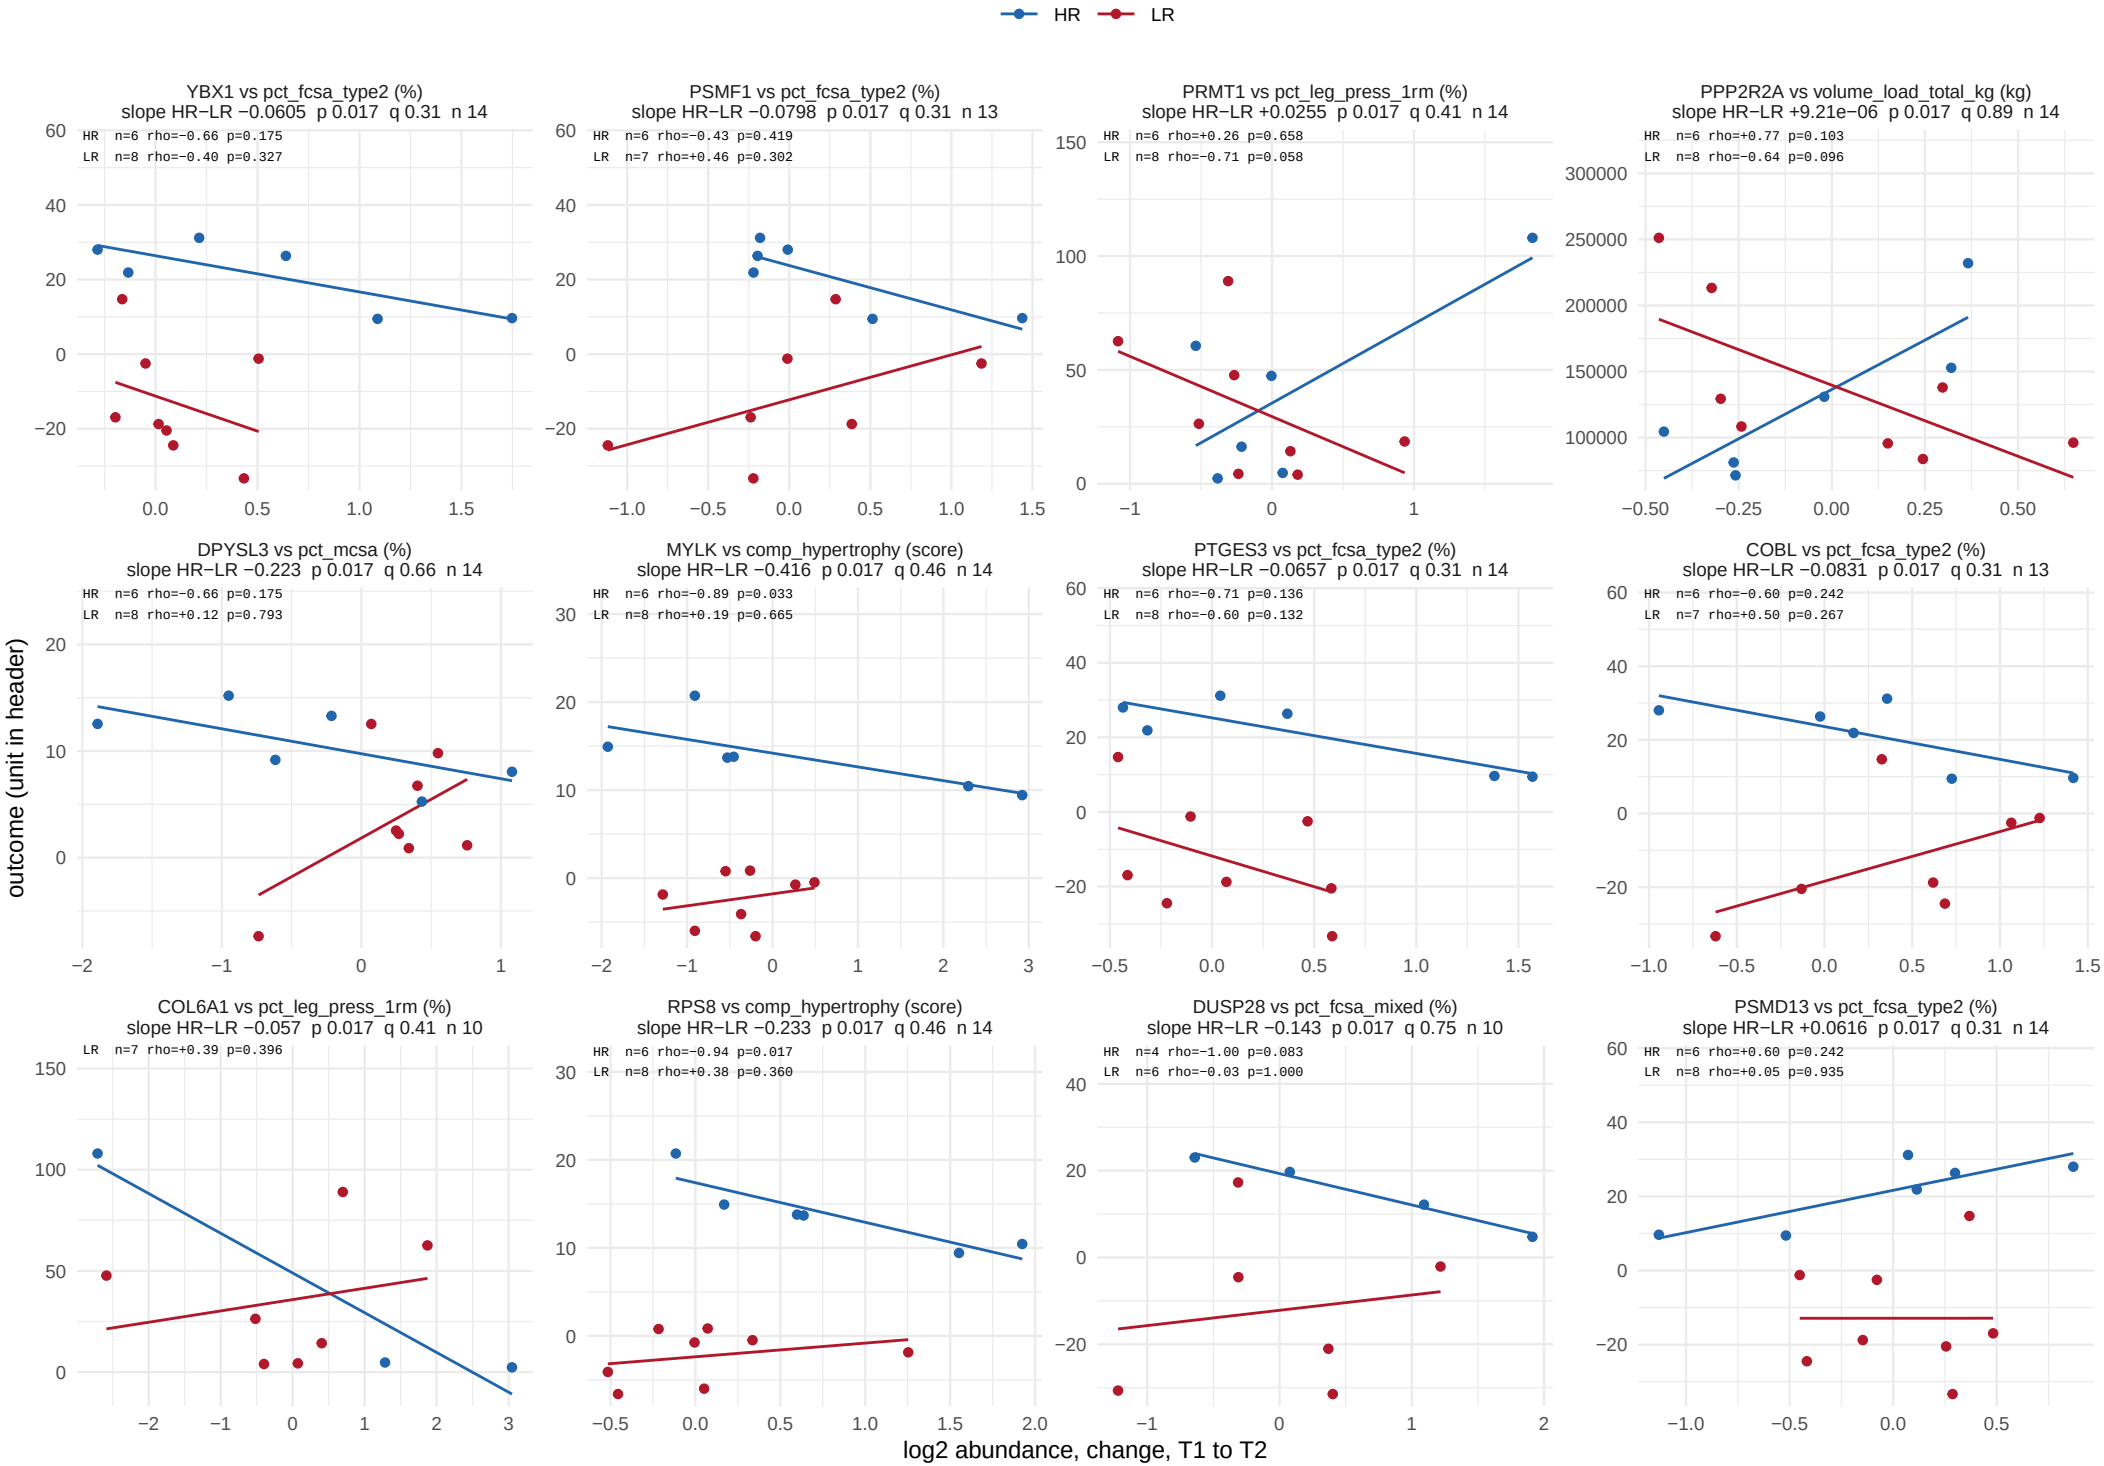

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


735 of 11282 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 27 of 62.

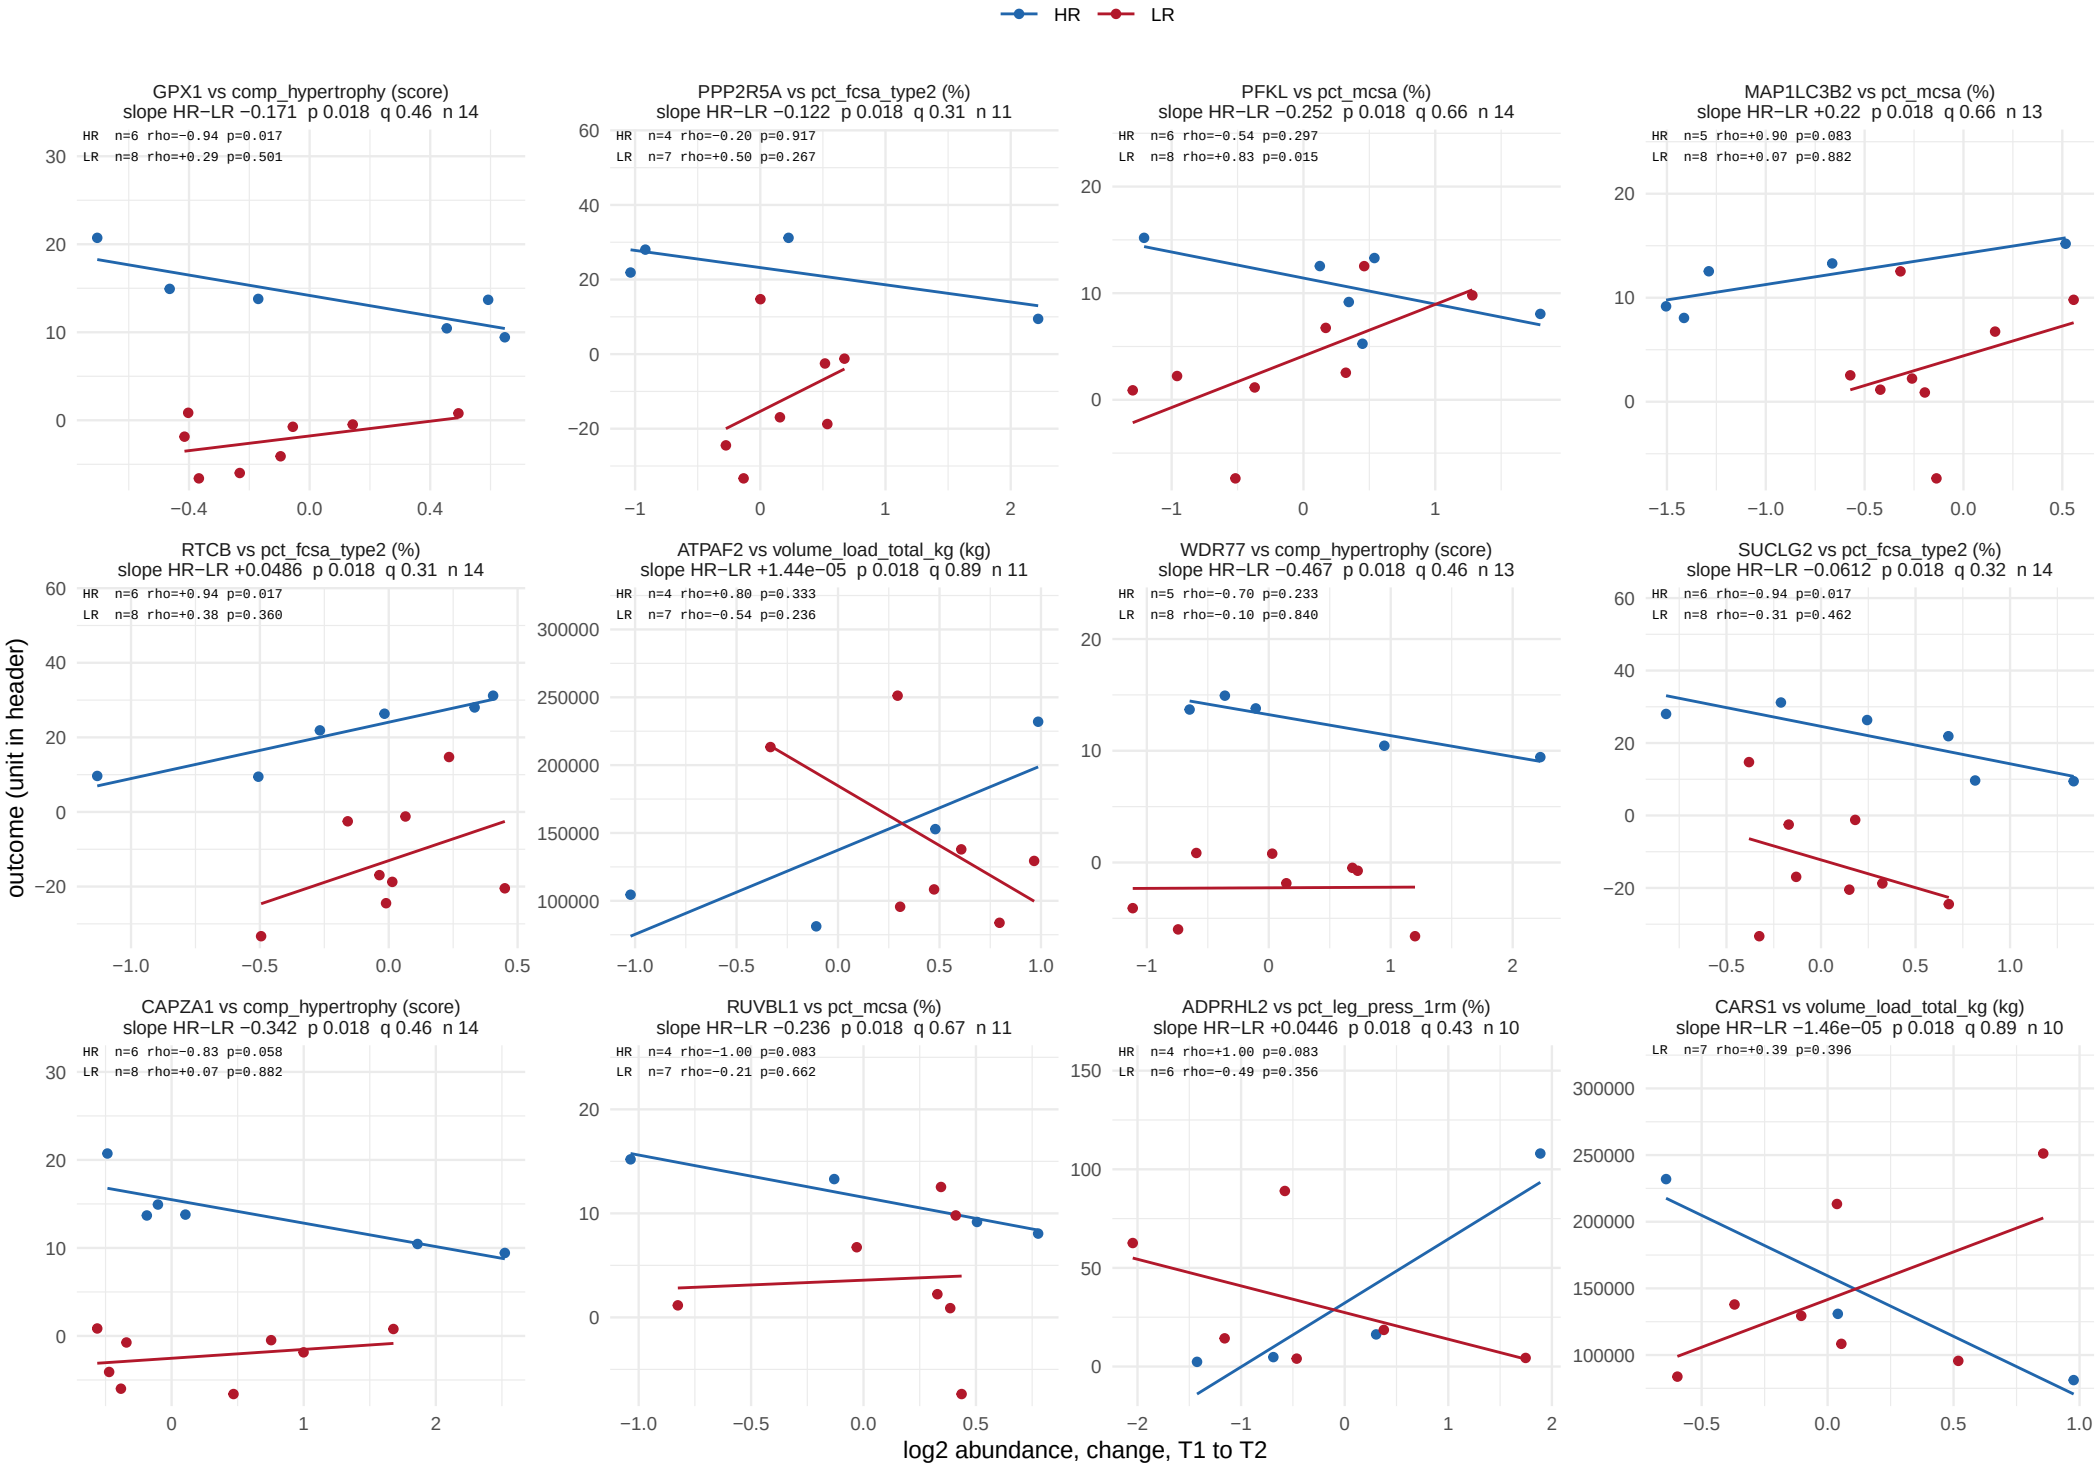

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


735 of 11282 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 28 of 62.

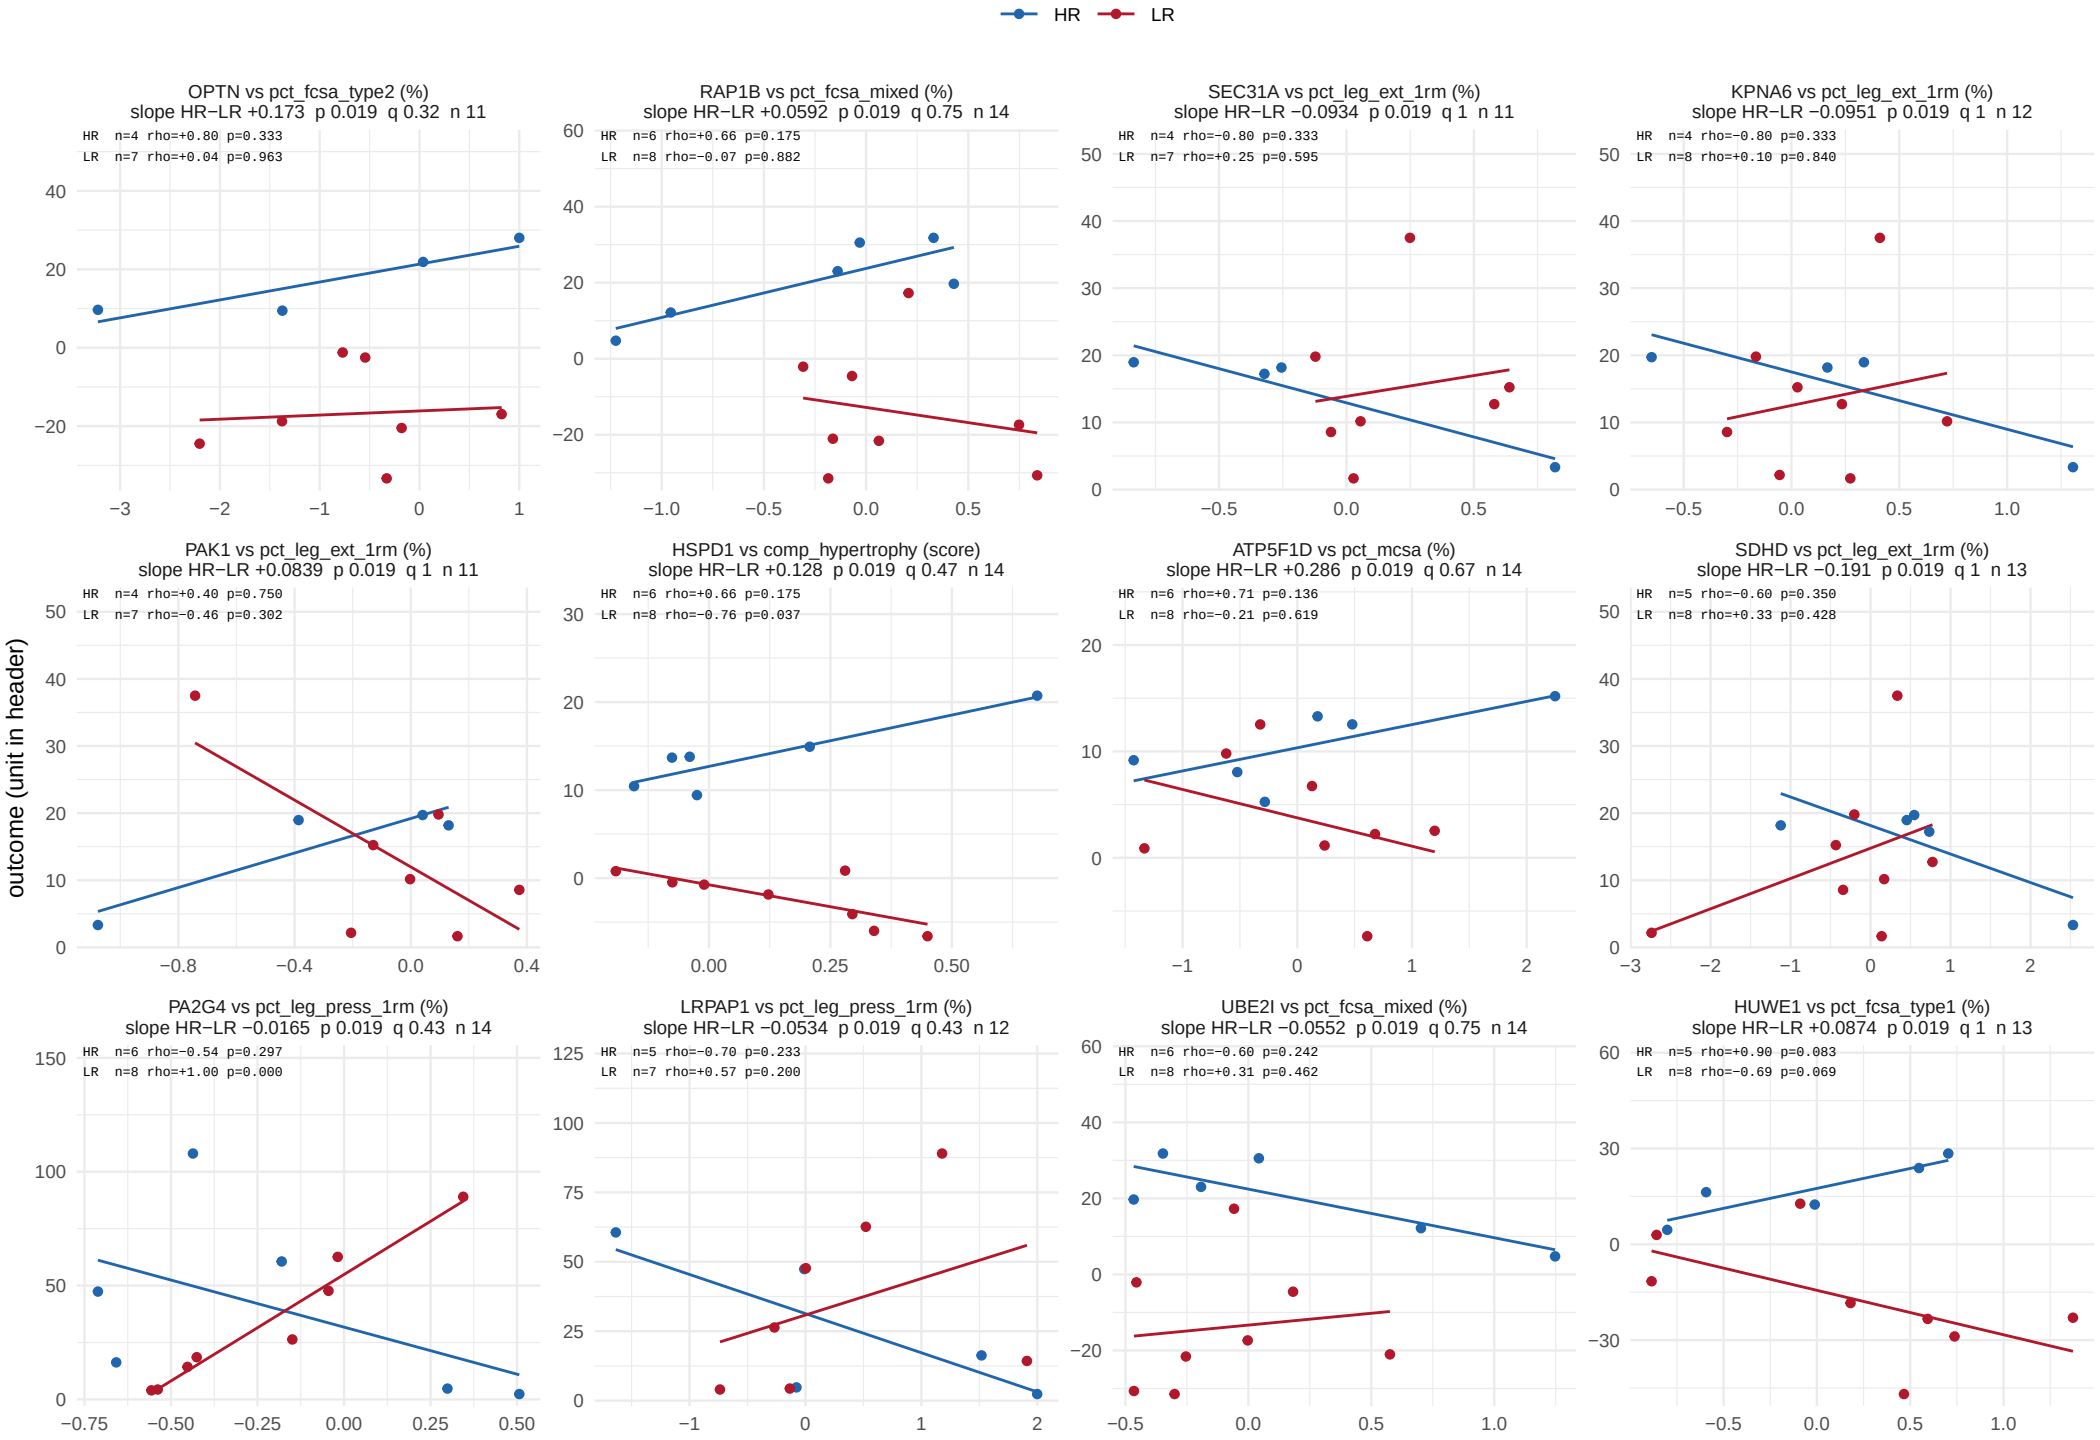

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


735 of 11282 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 29 of 62.

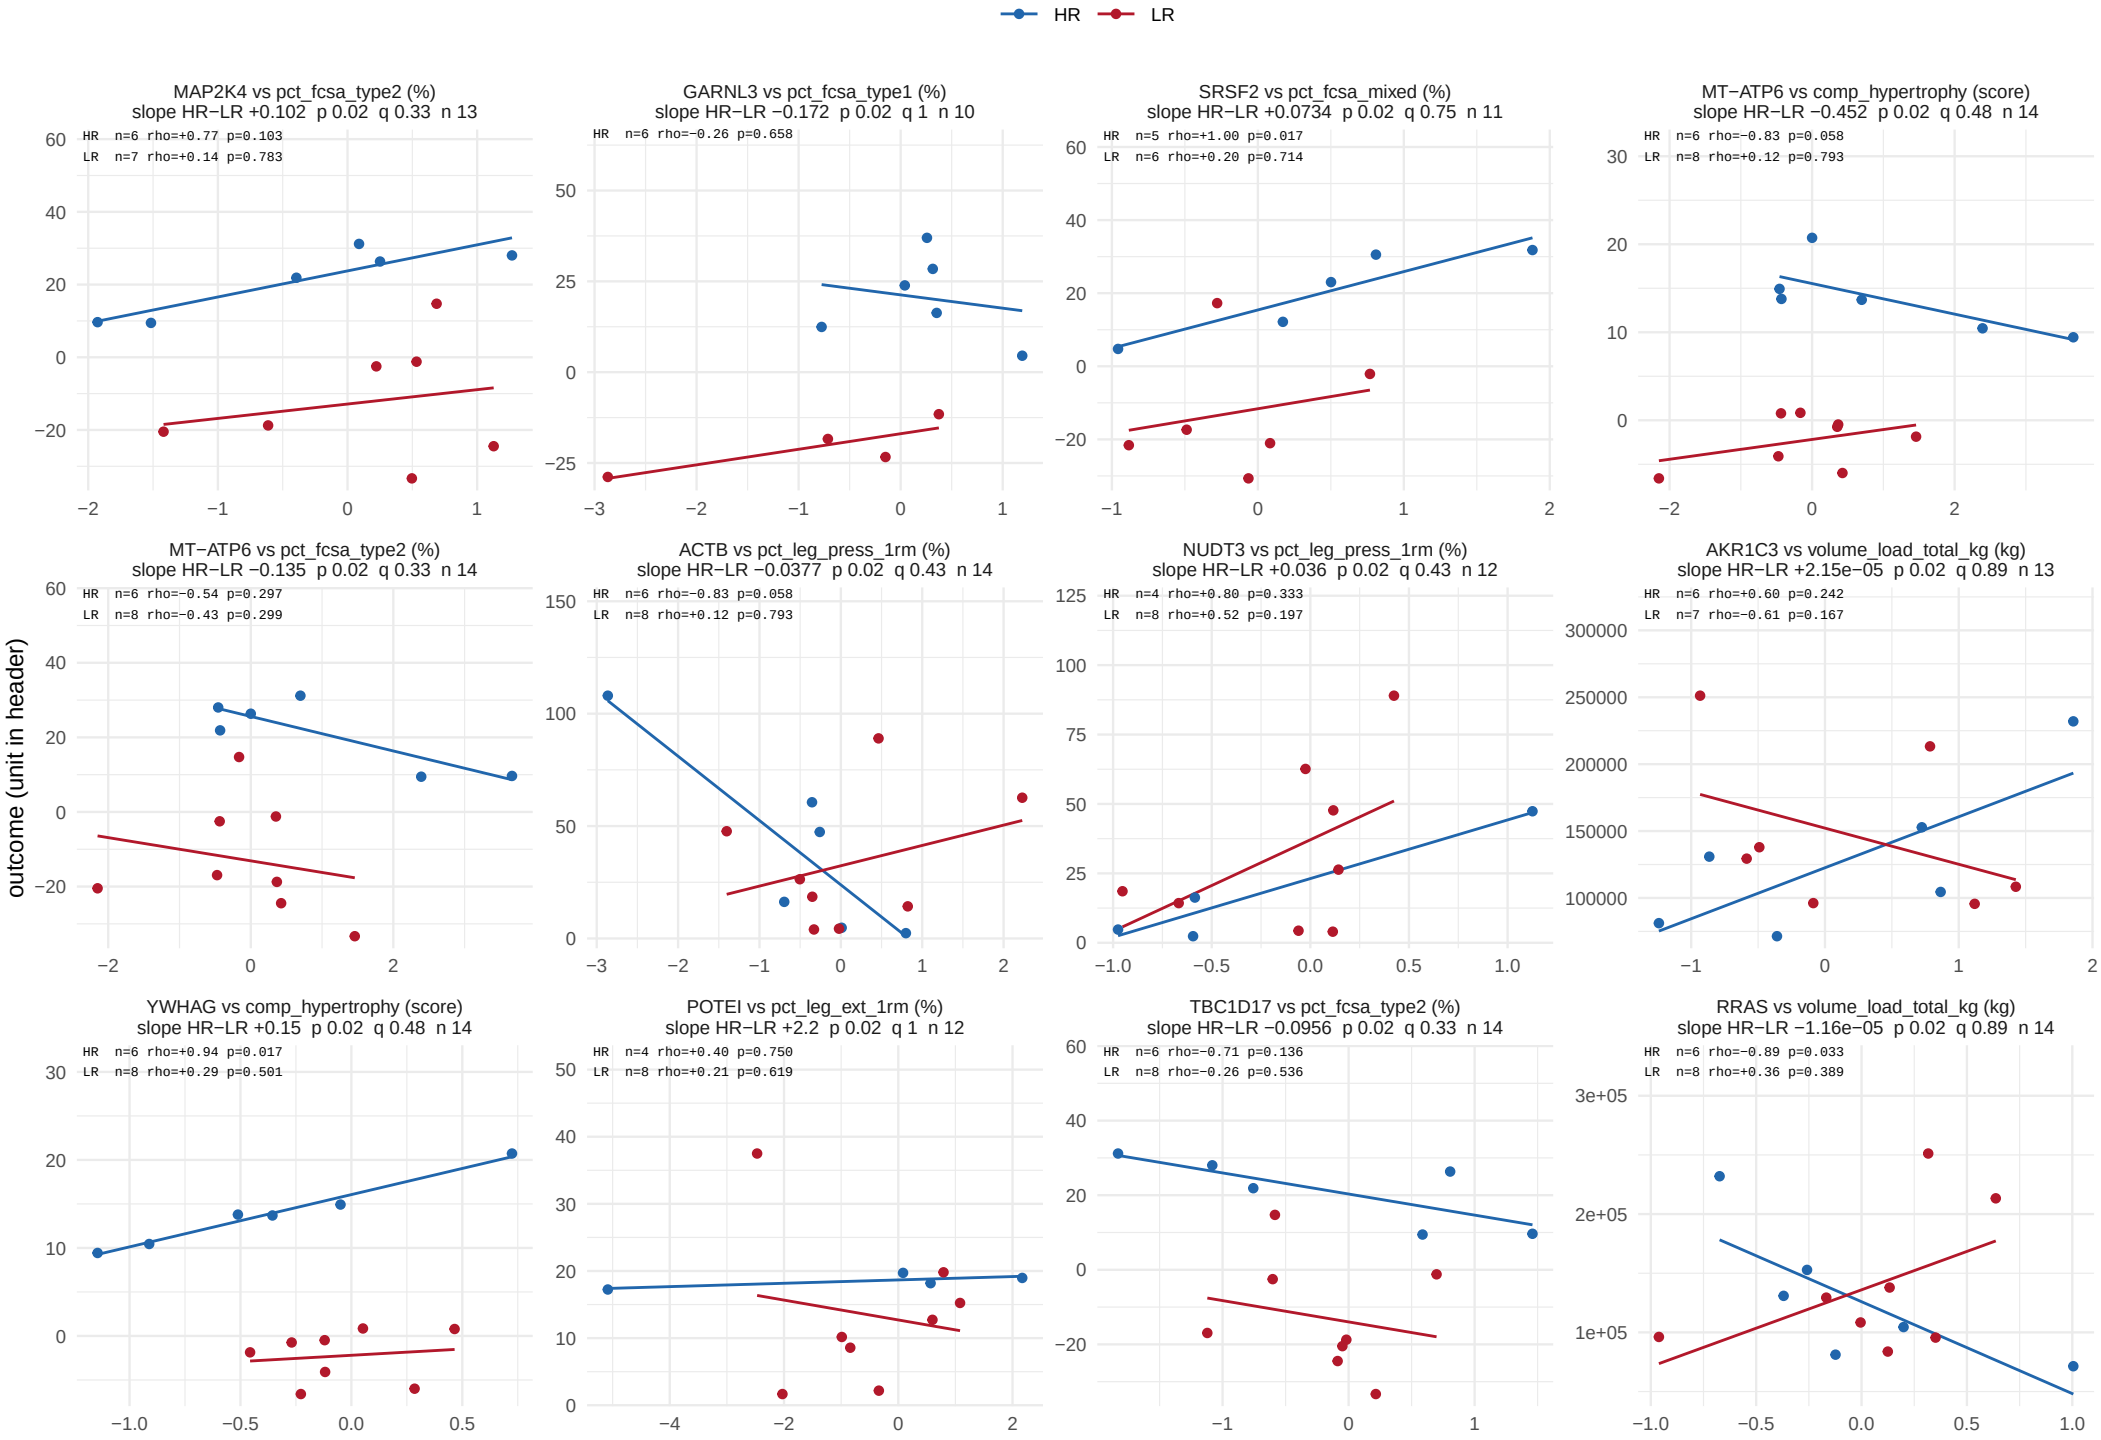

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


735 of 11282 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 30 of 62.

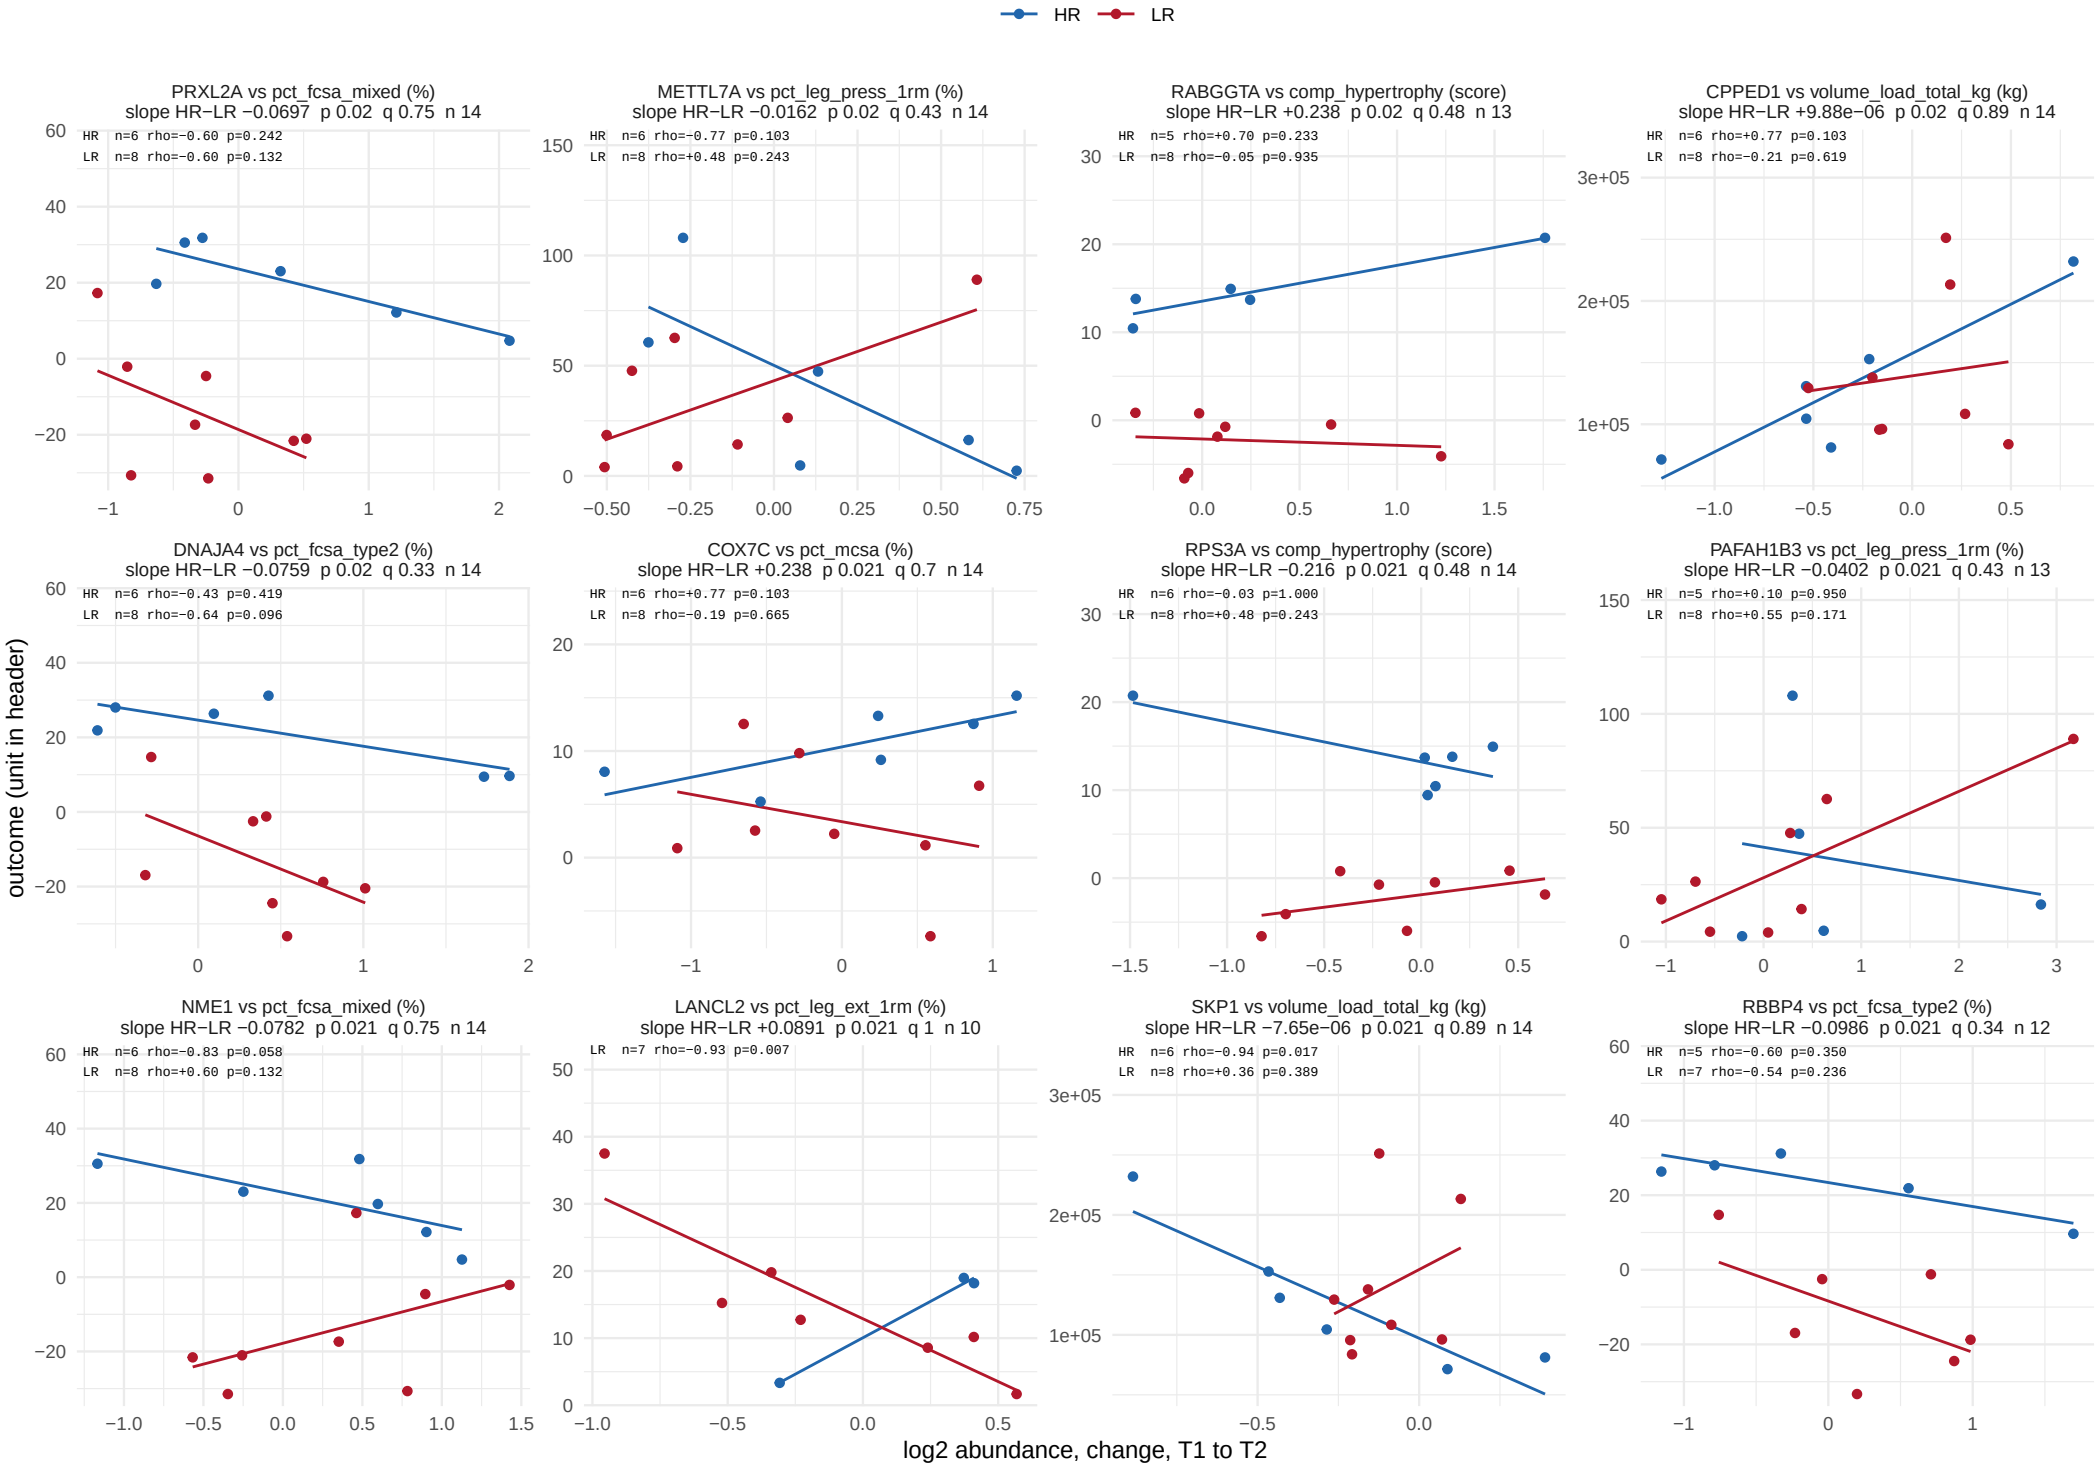

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


735 of 11282 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 31 of 62.

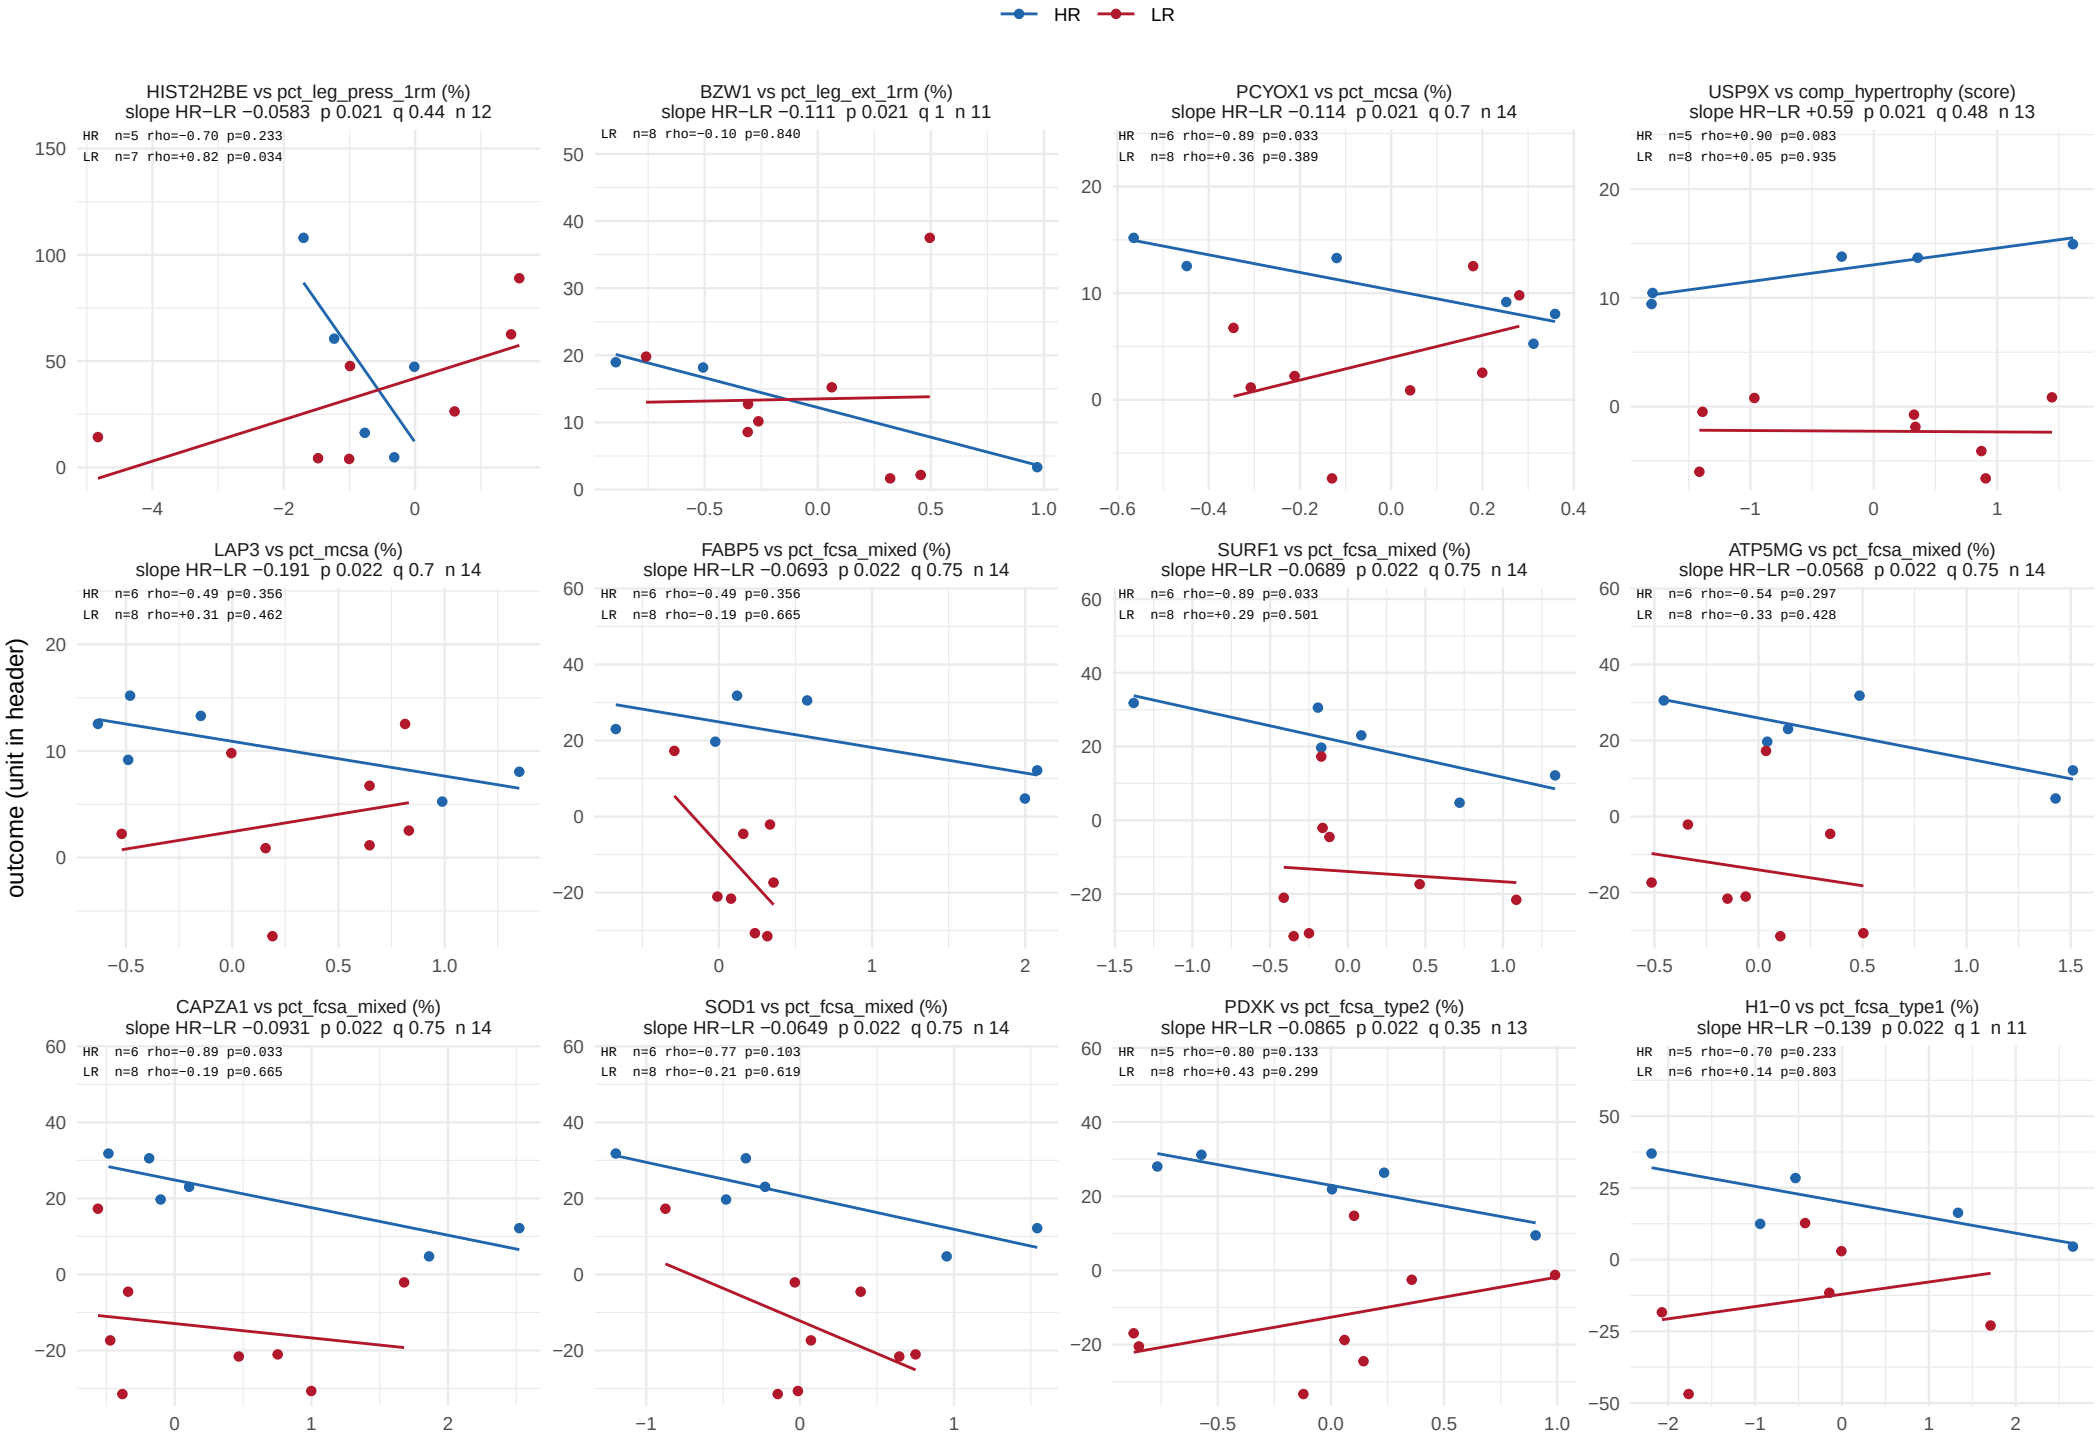

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


735 of 11282 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 32 of 62.

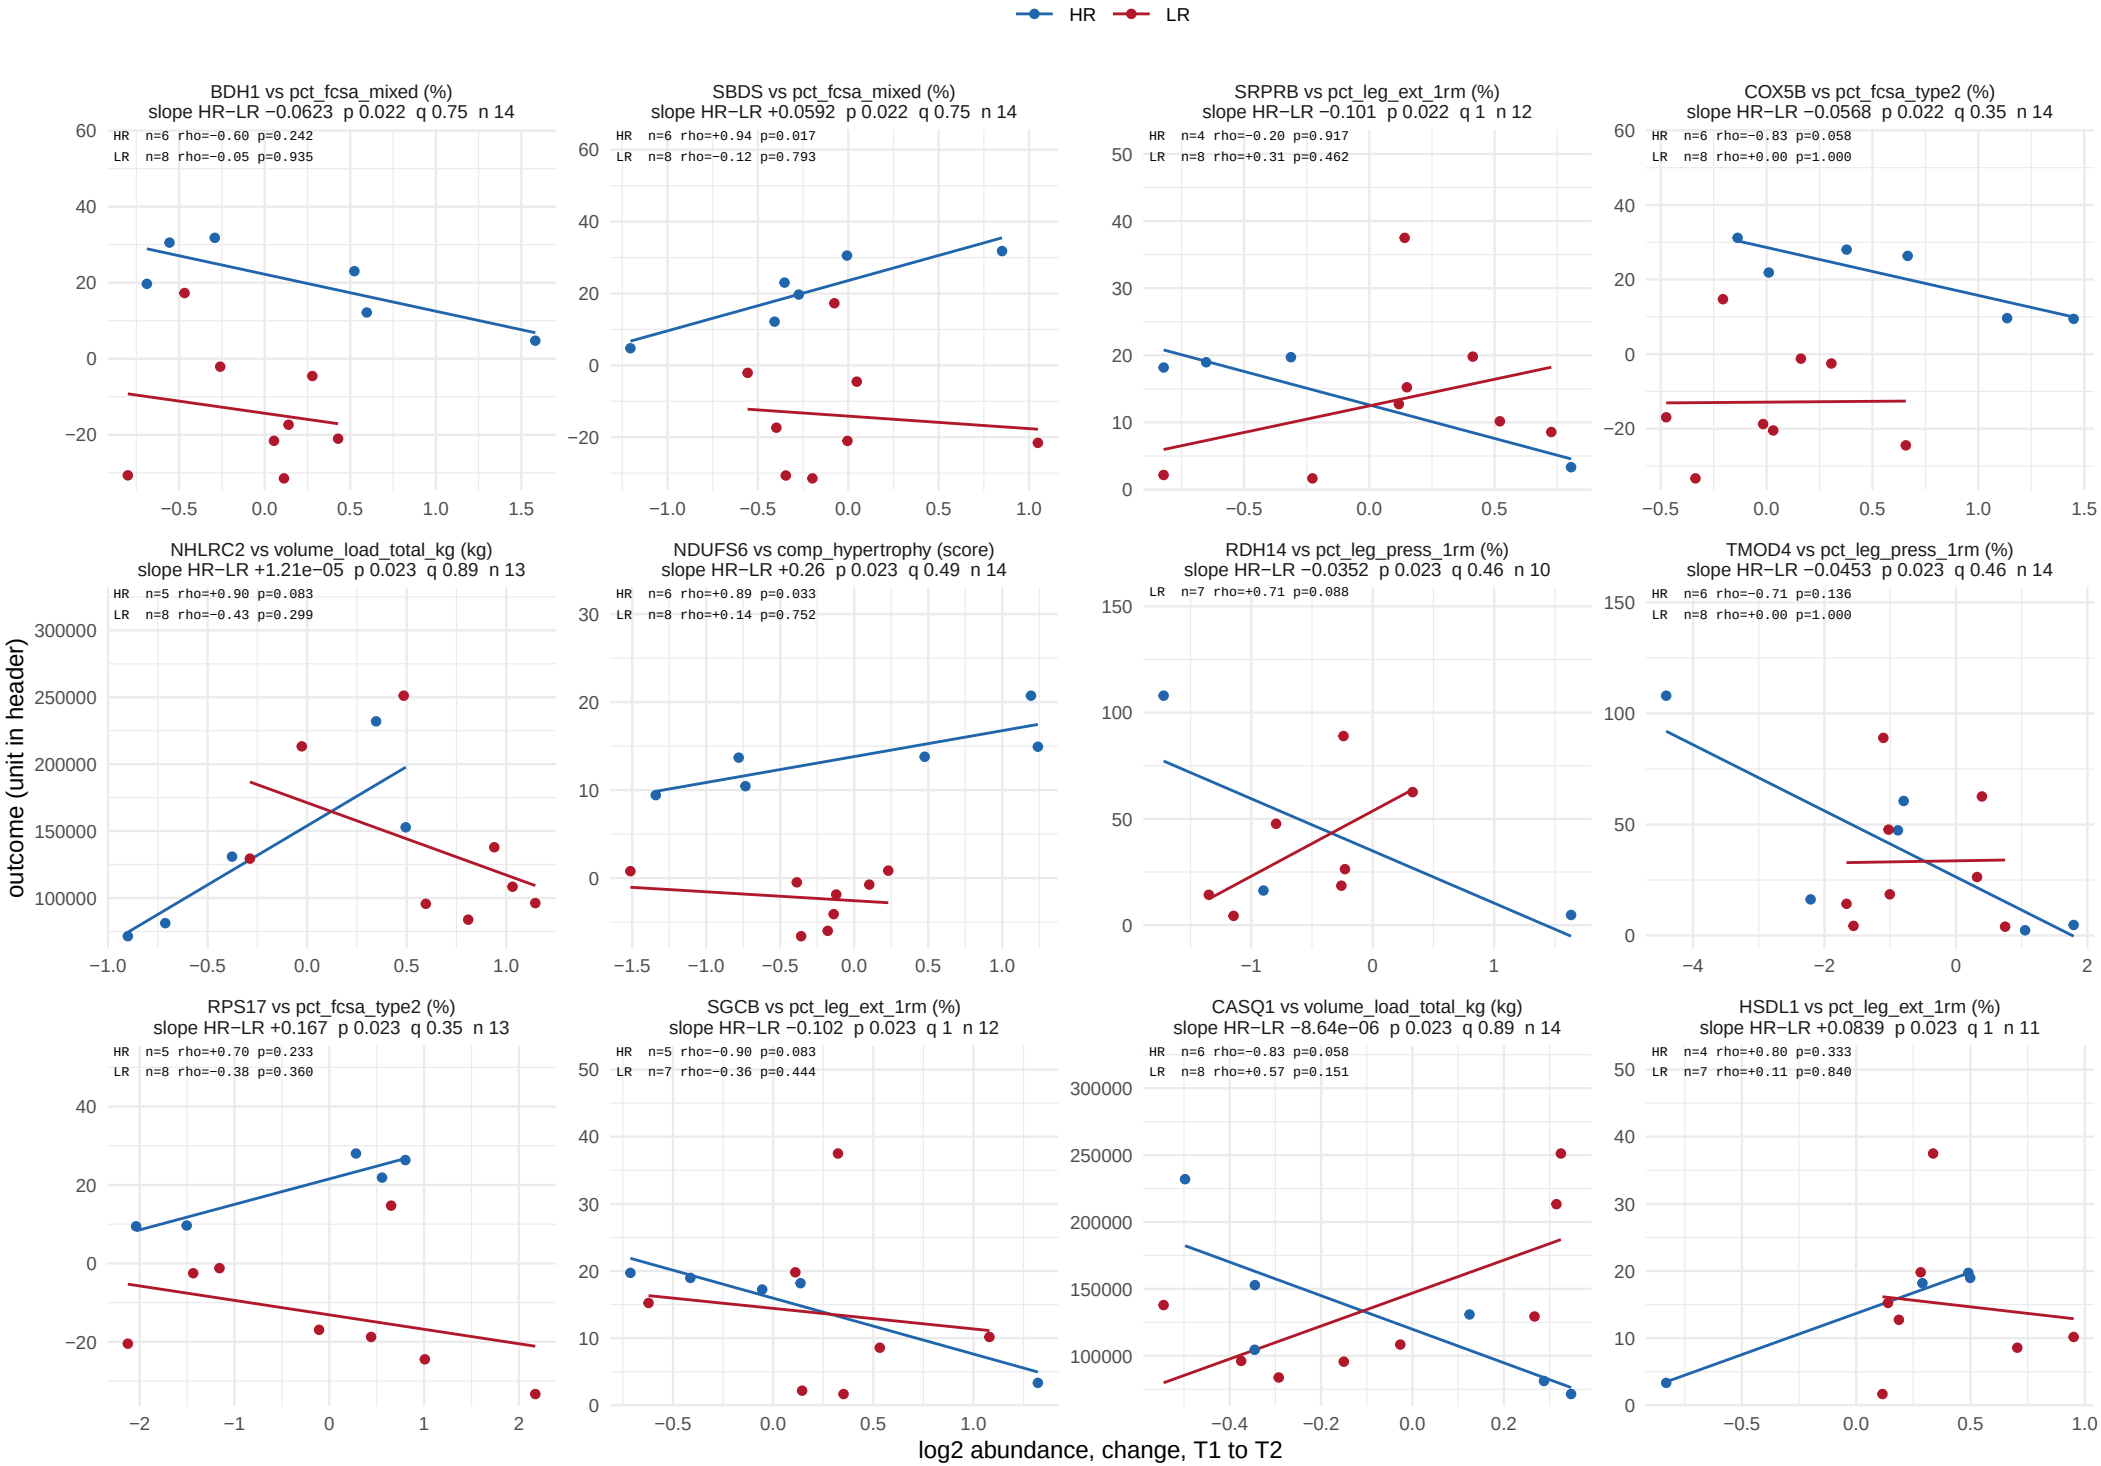

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


735 of 11282 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 33 of 62.

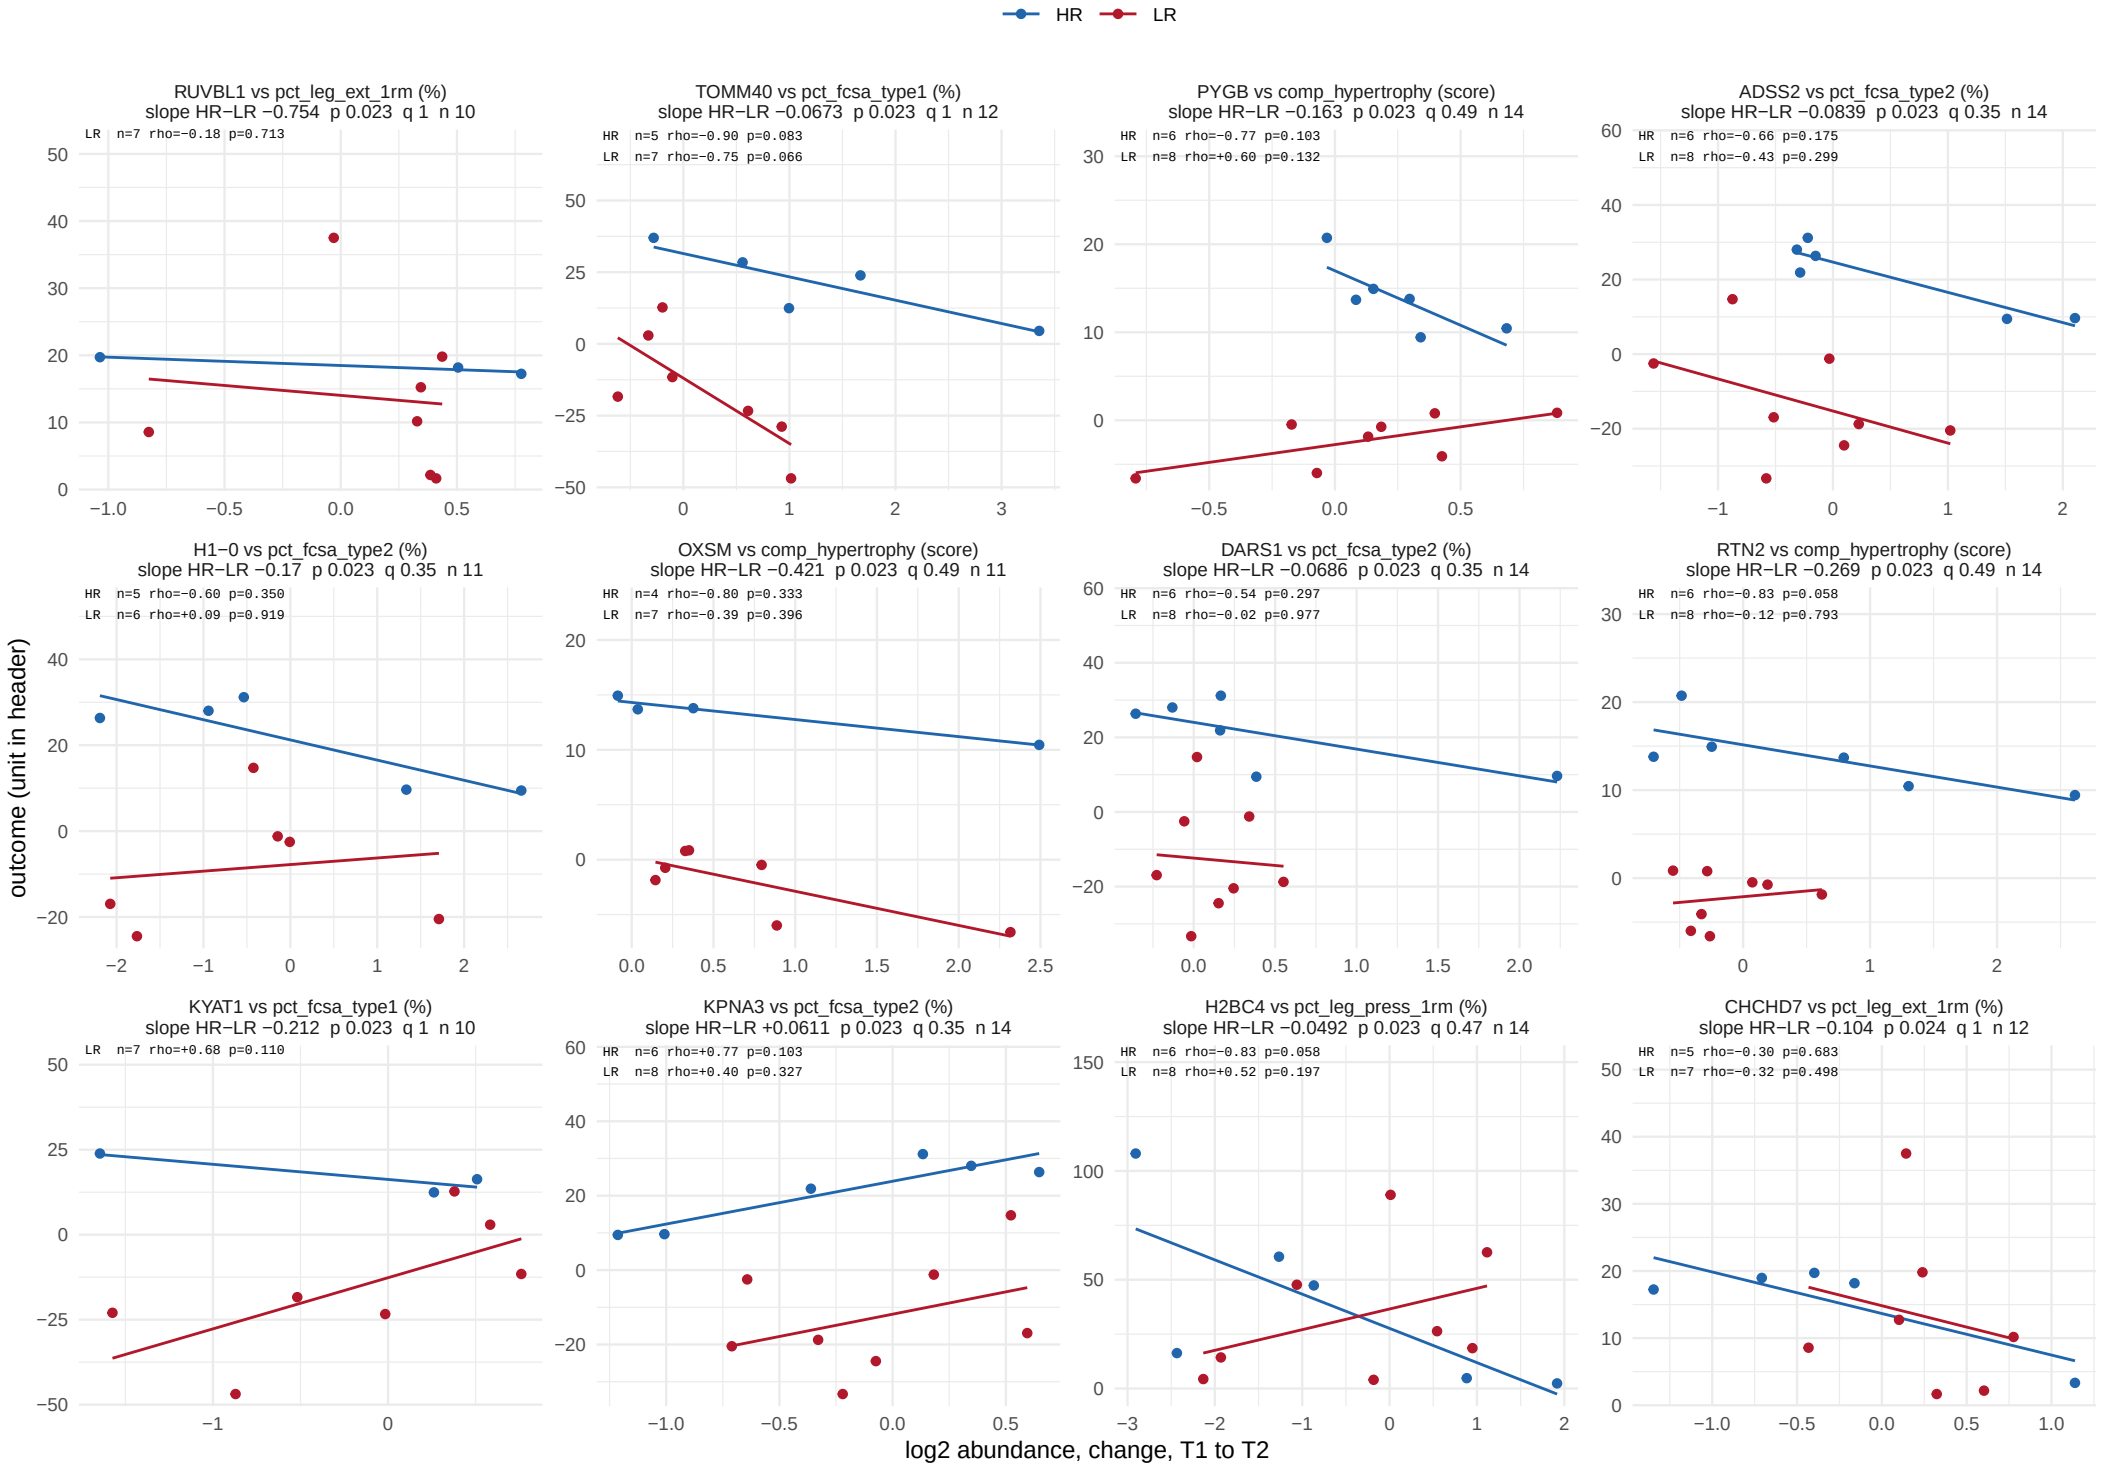

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


735 of 11282 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 34 of 62.

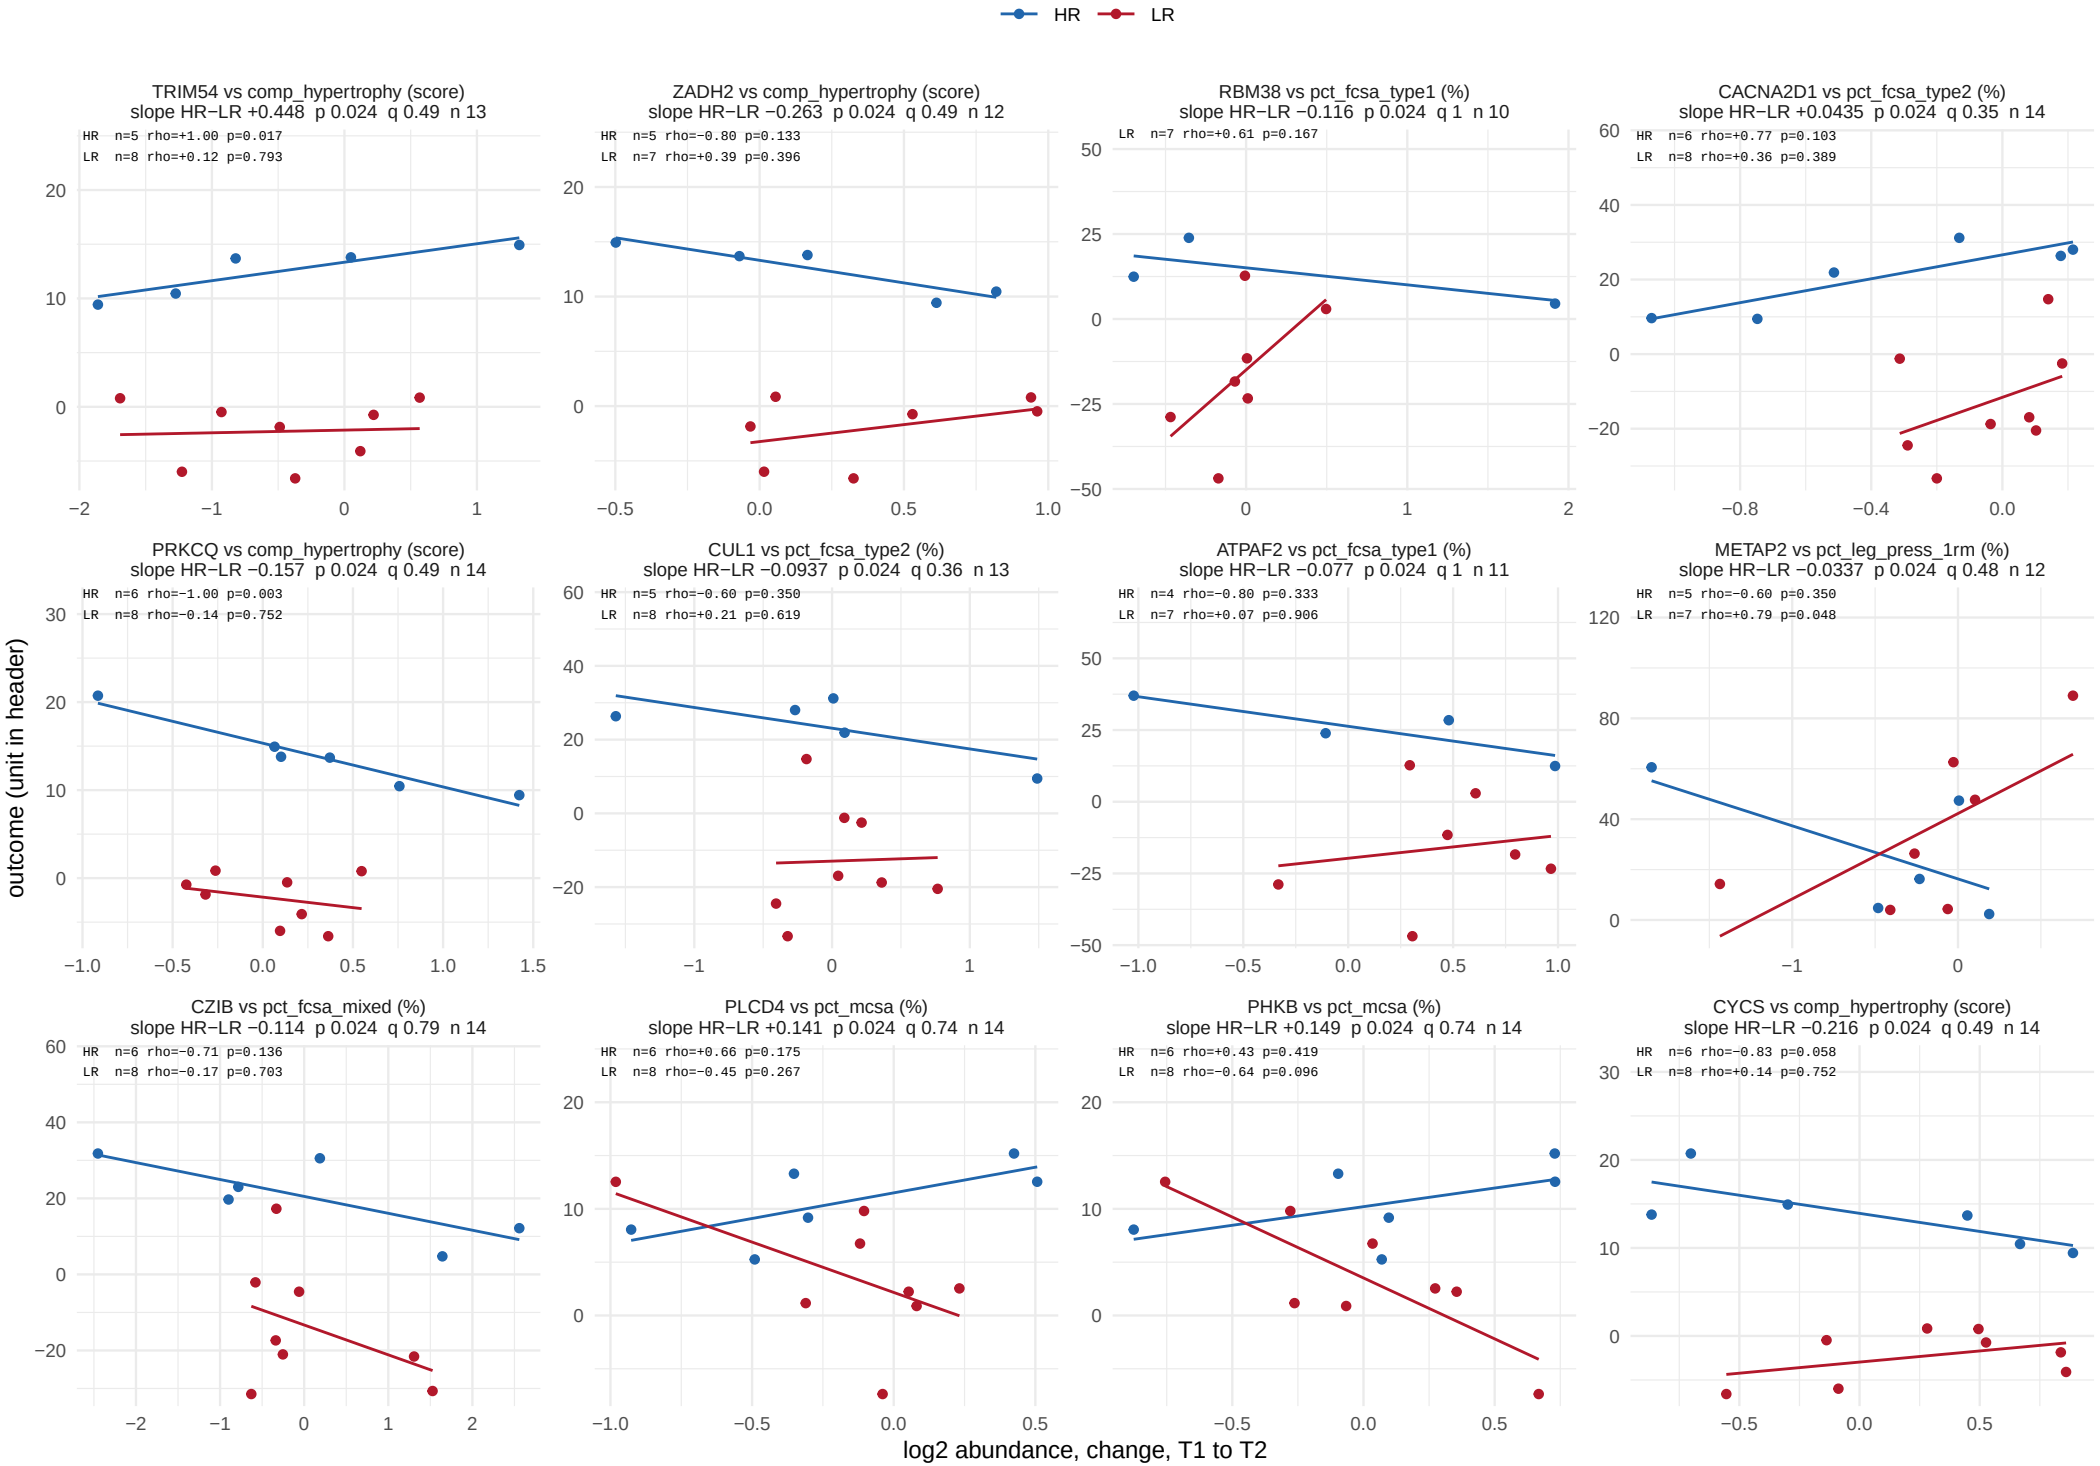

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


735 of 11282 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 35 of 62.

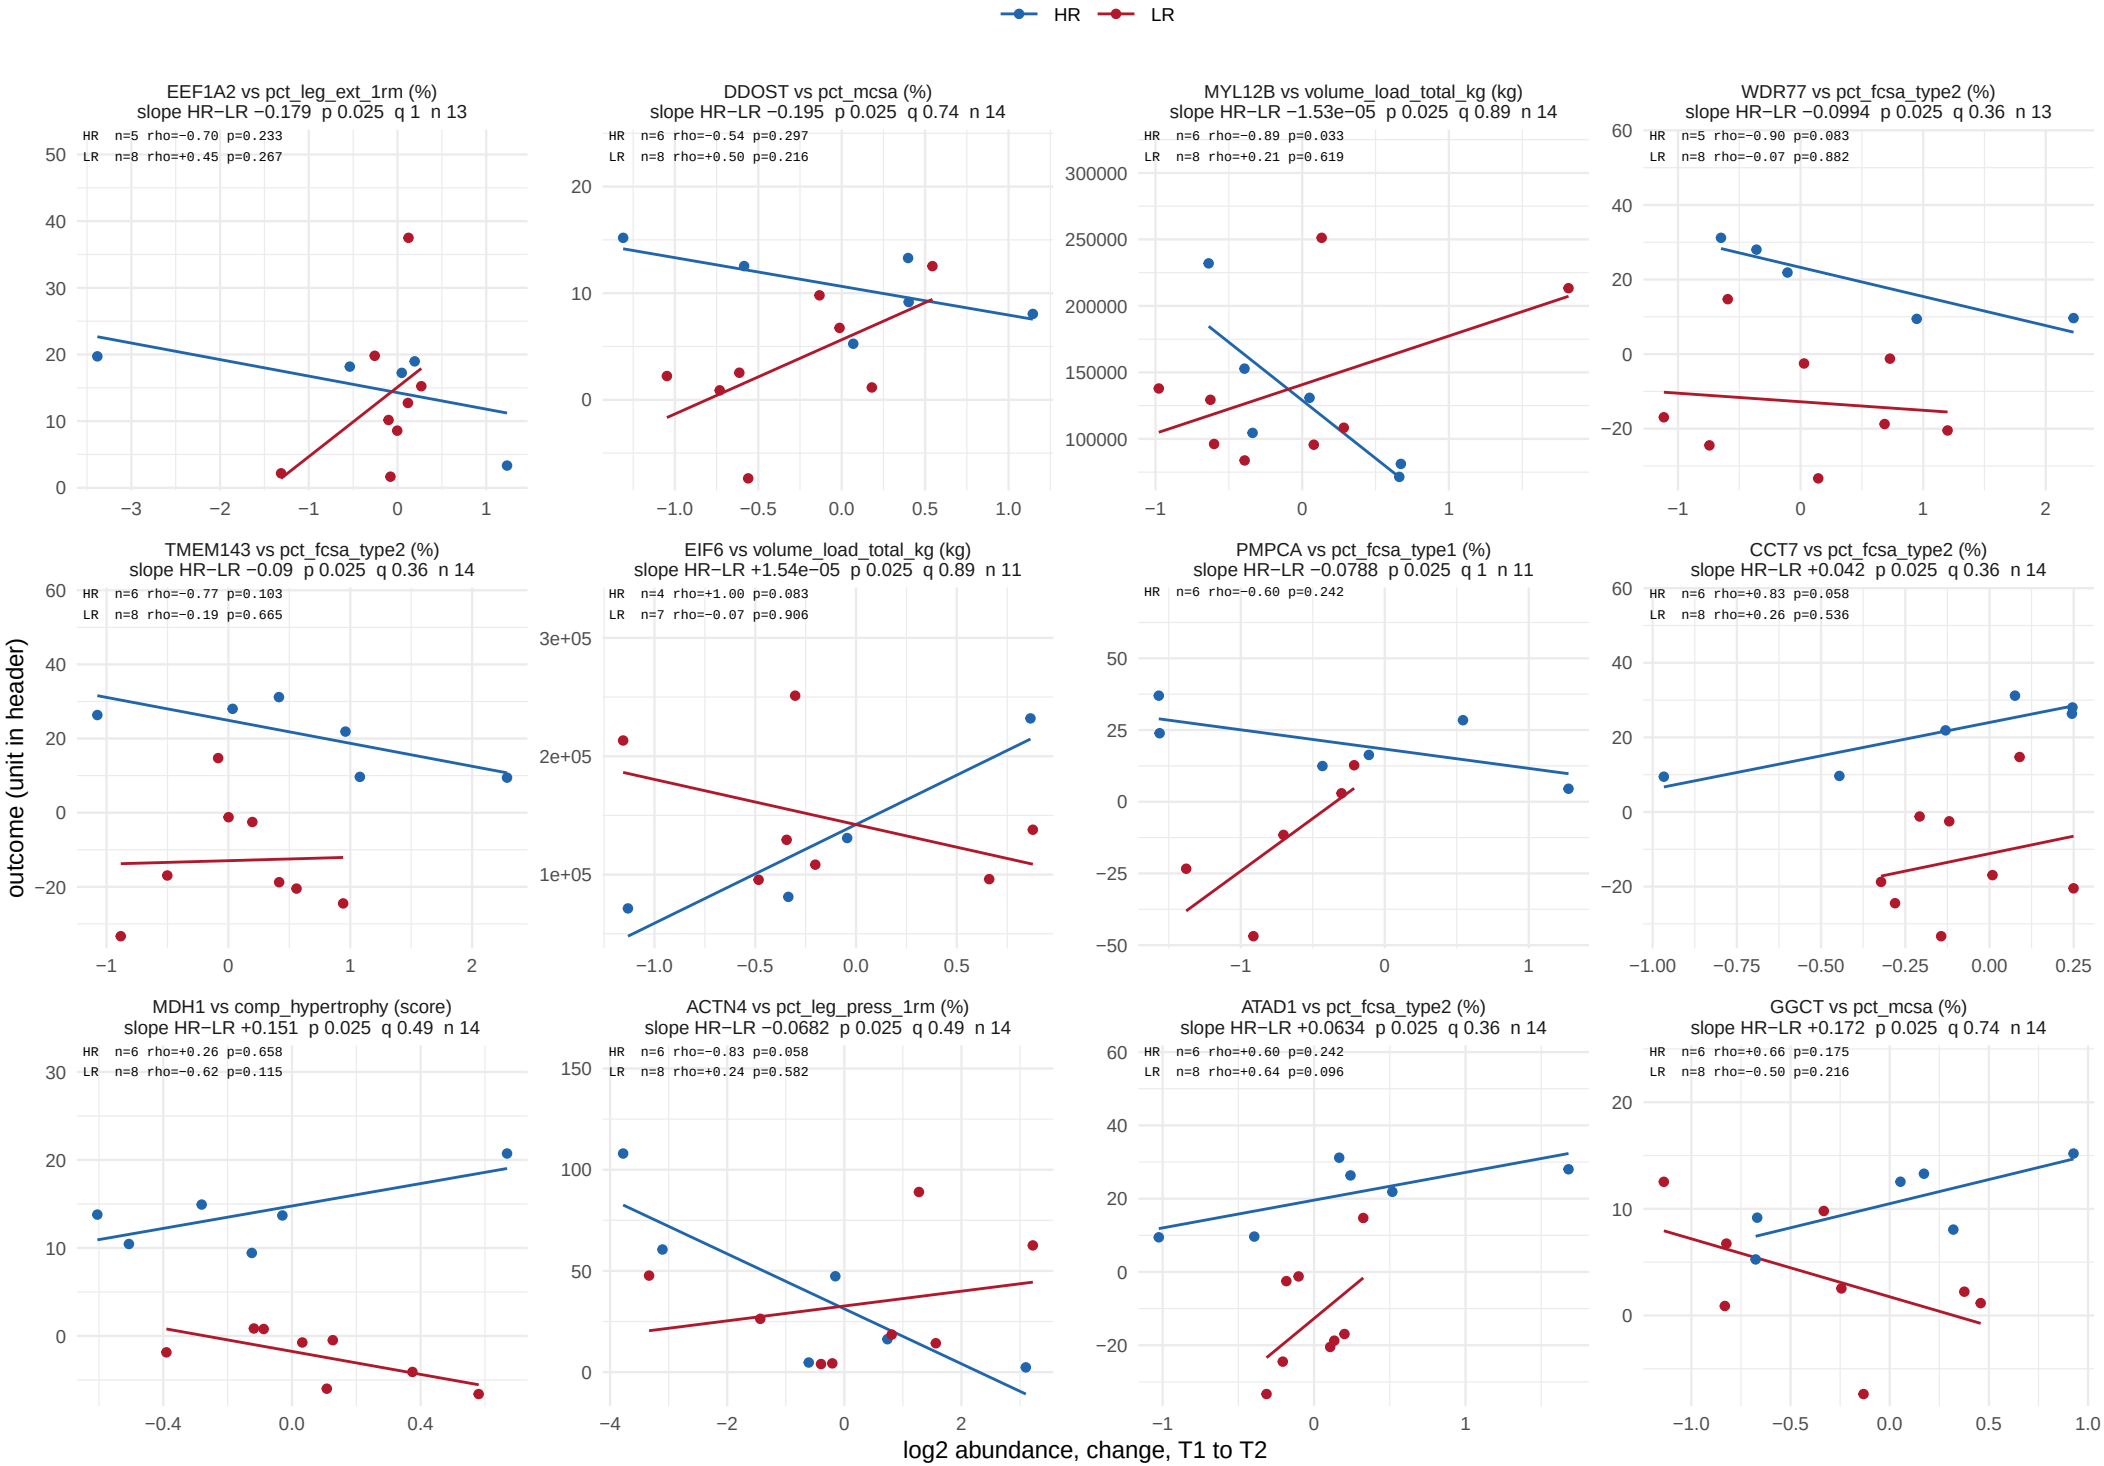

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


735 of 11282 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 36 of 62.

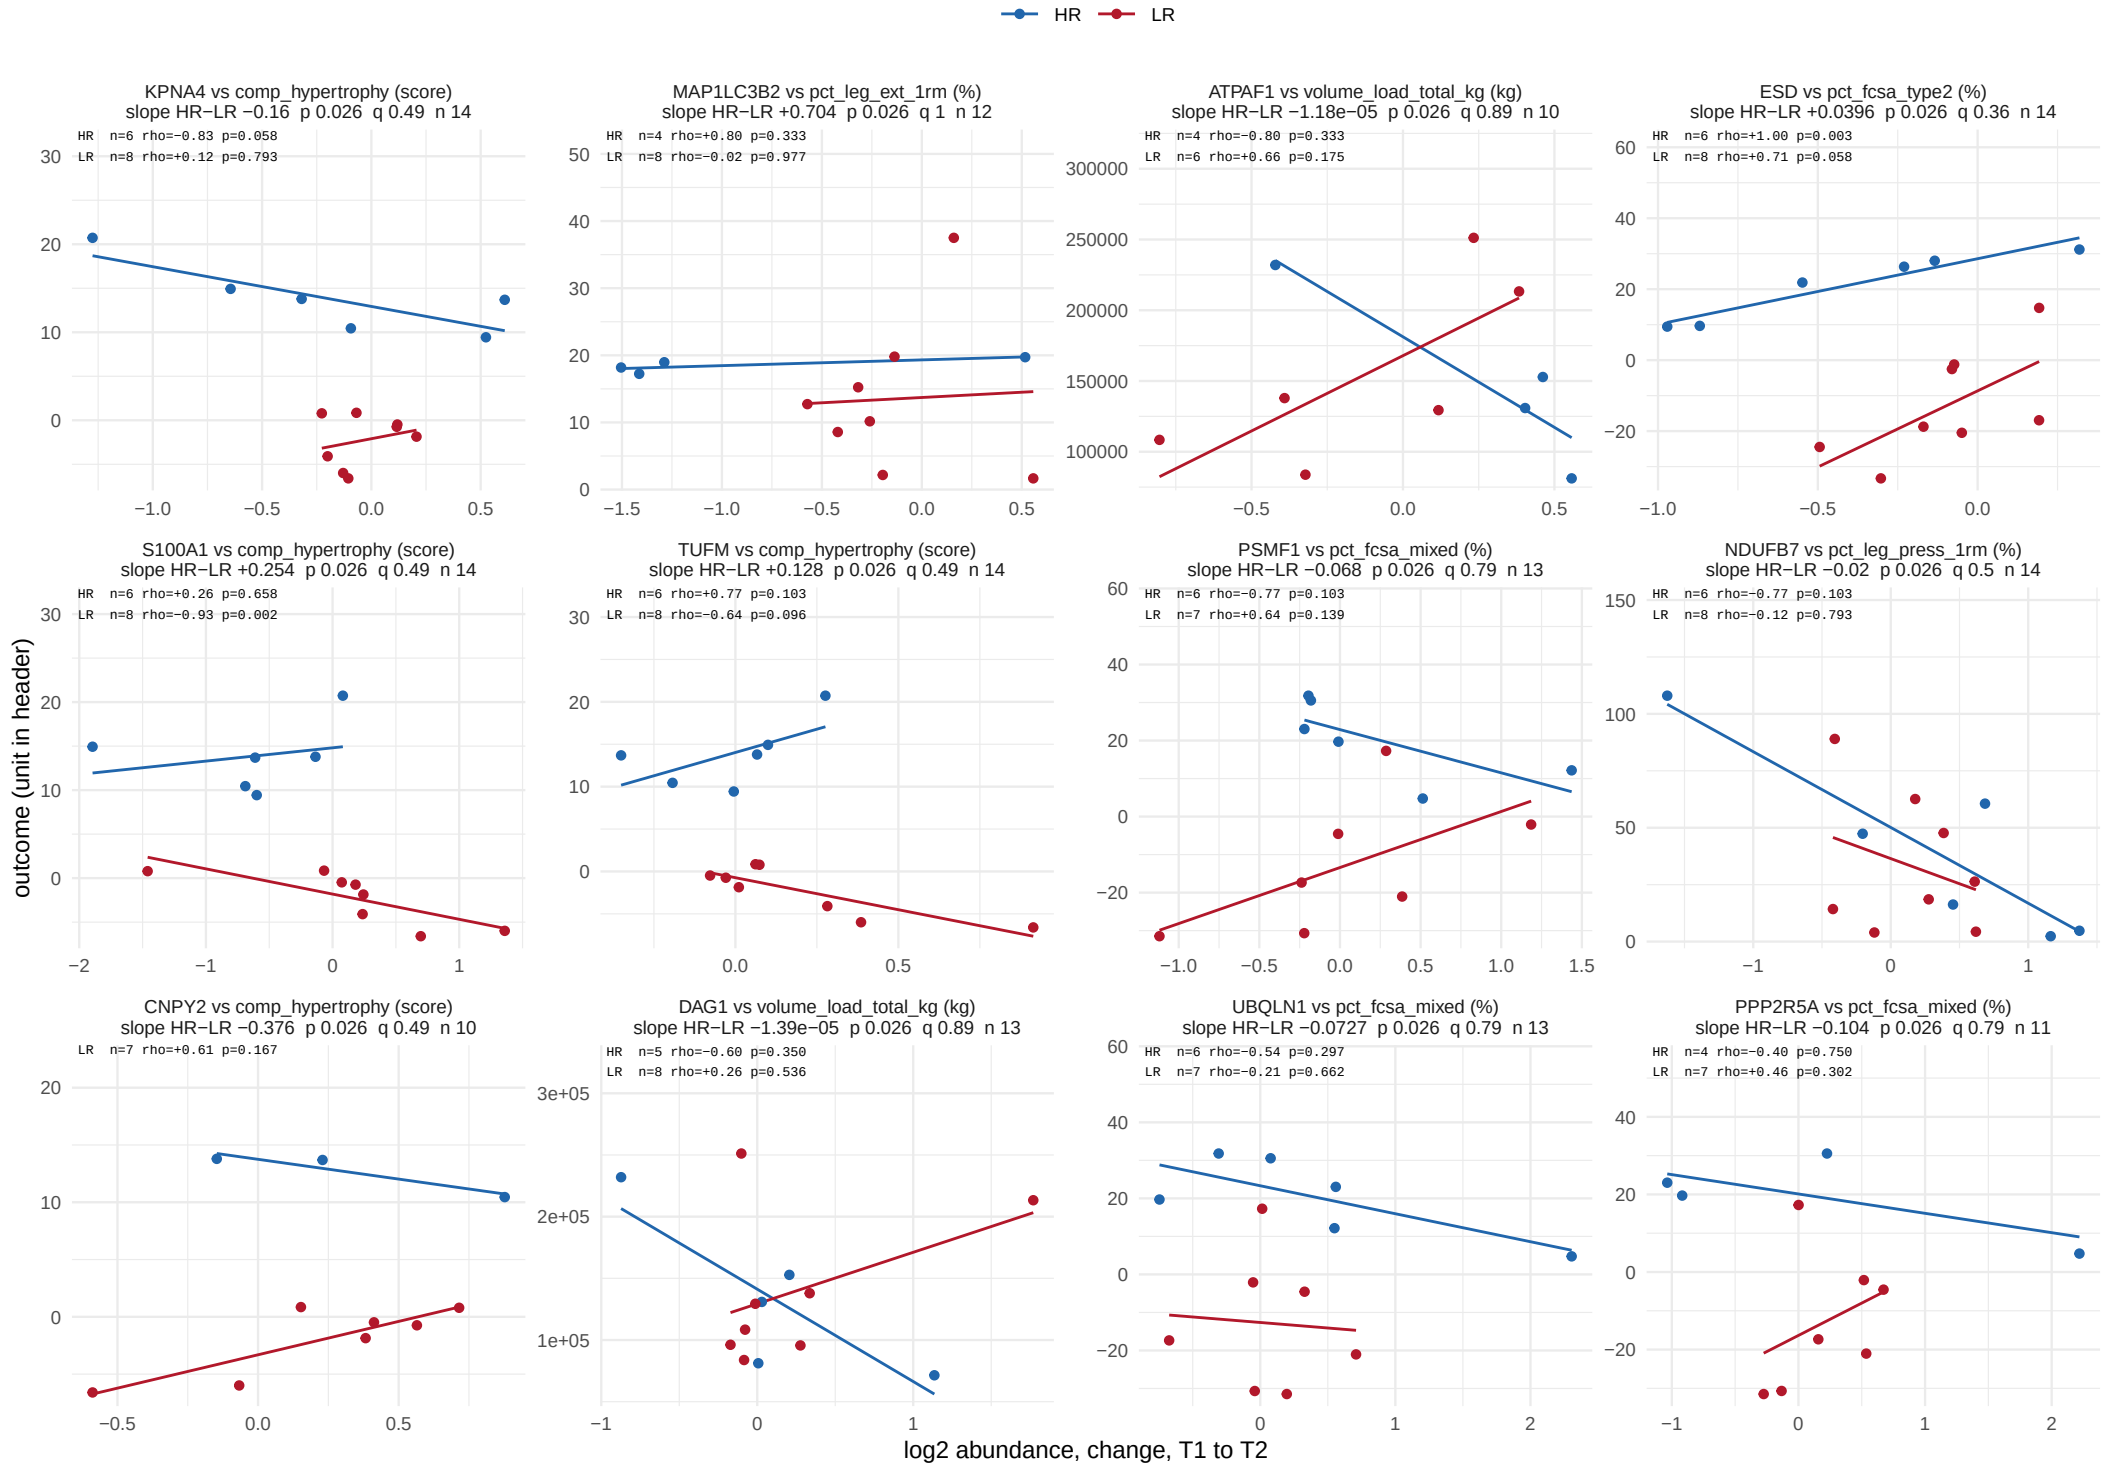

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


735 of 11282 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 37 of 62.

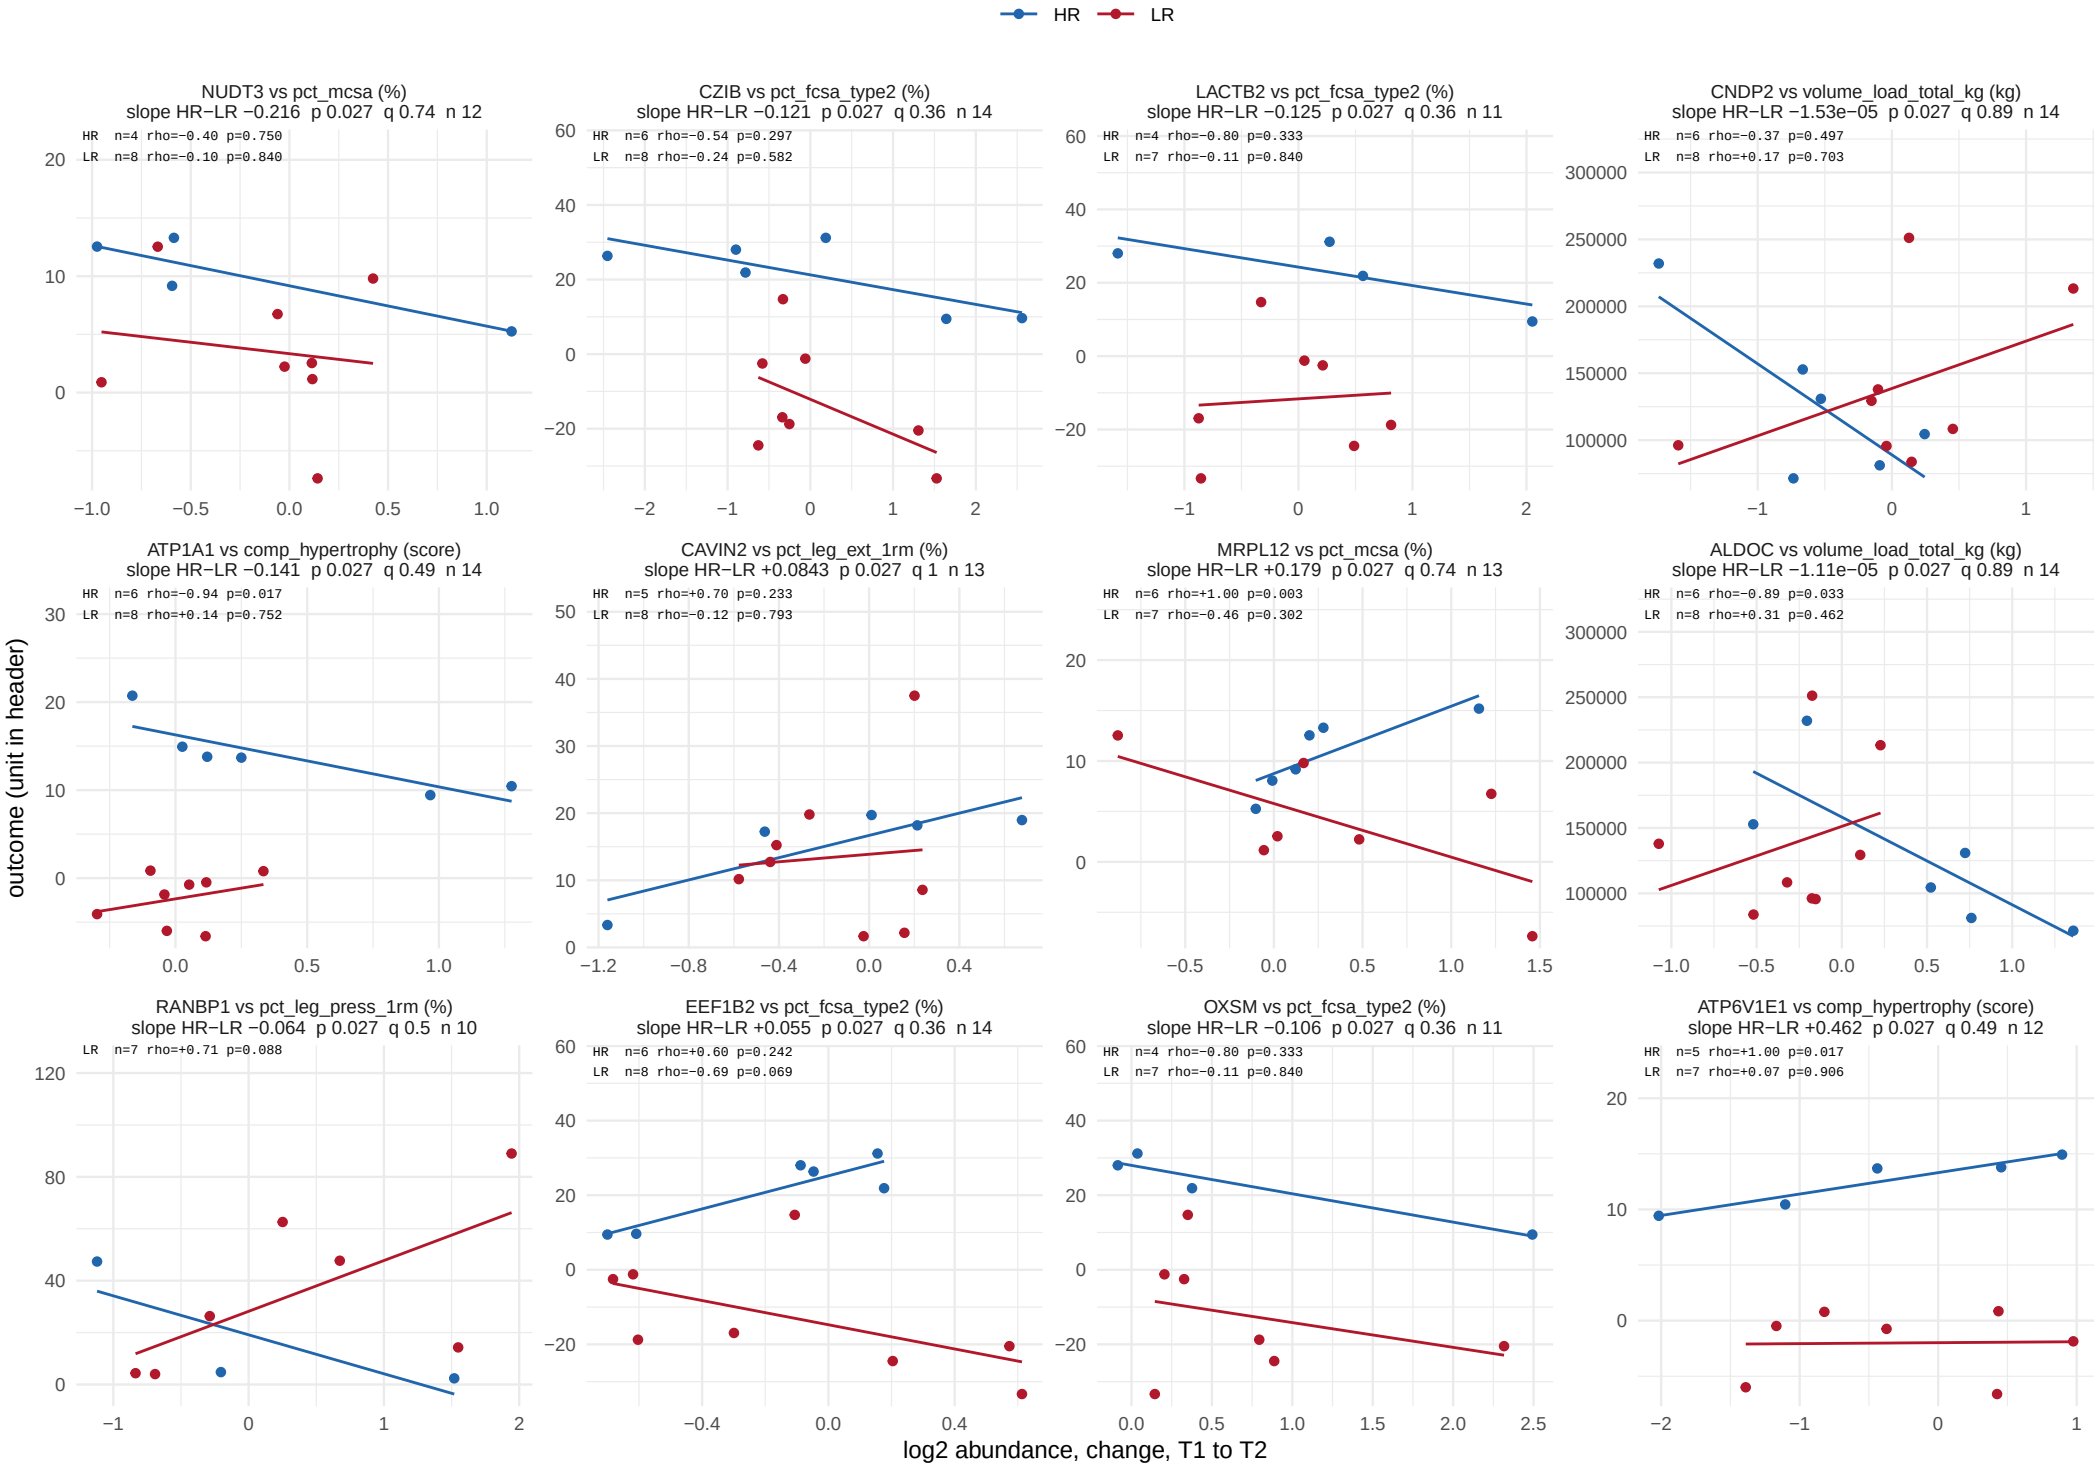

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


735 of 11282 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 38 of 62.

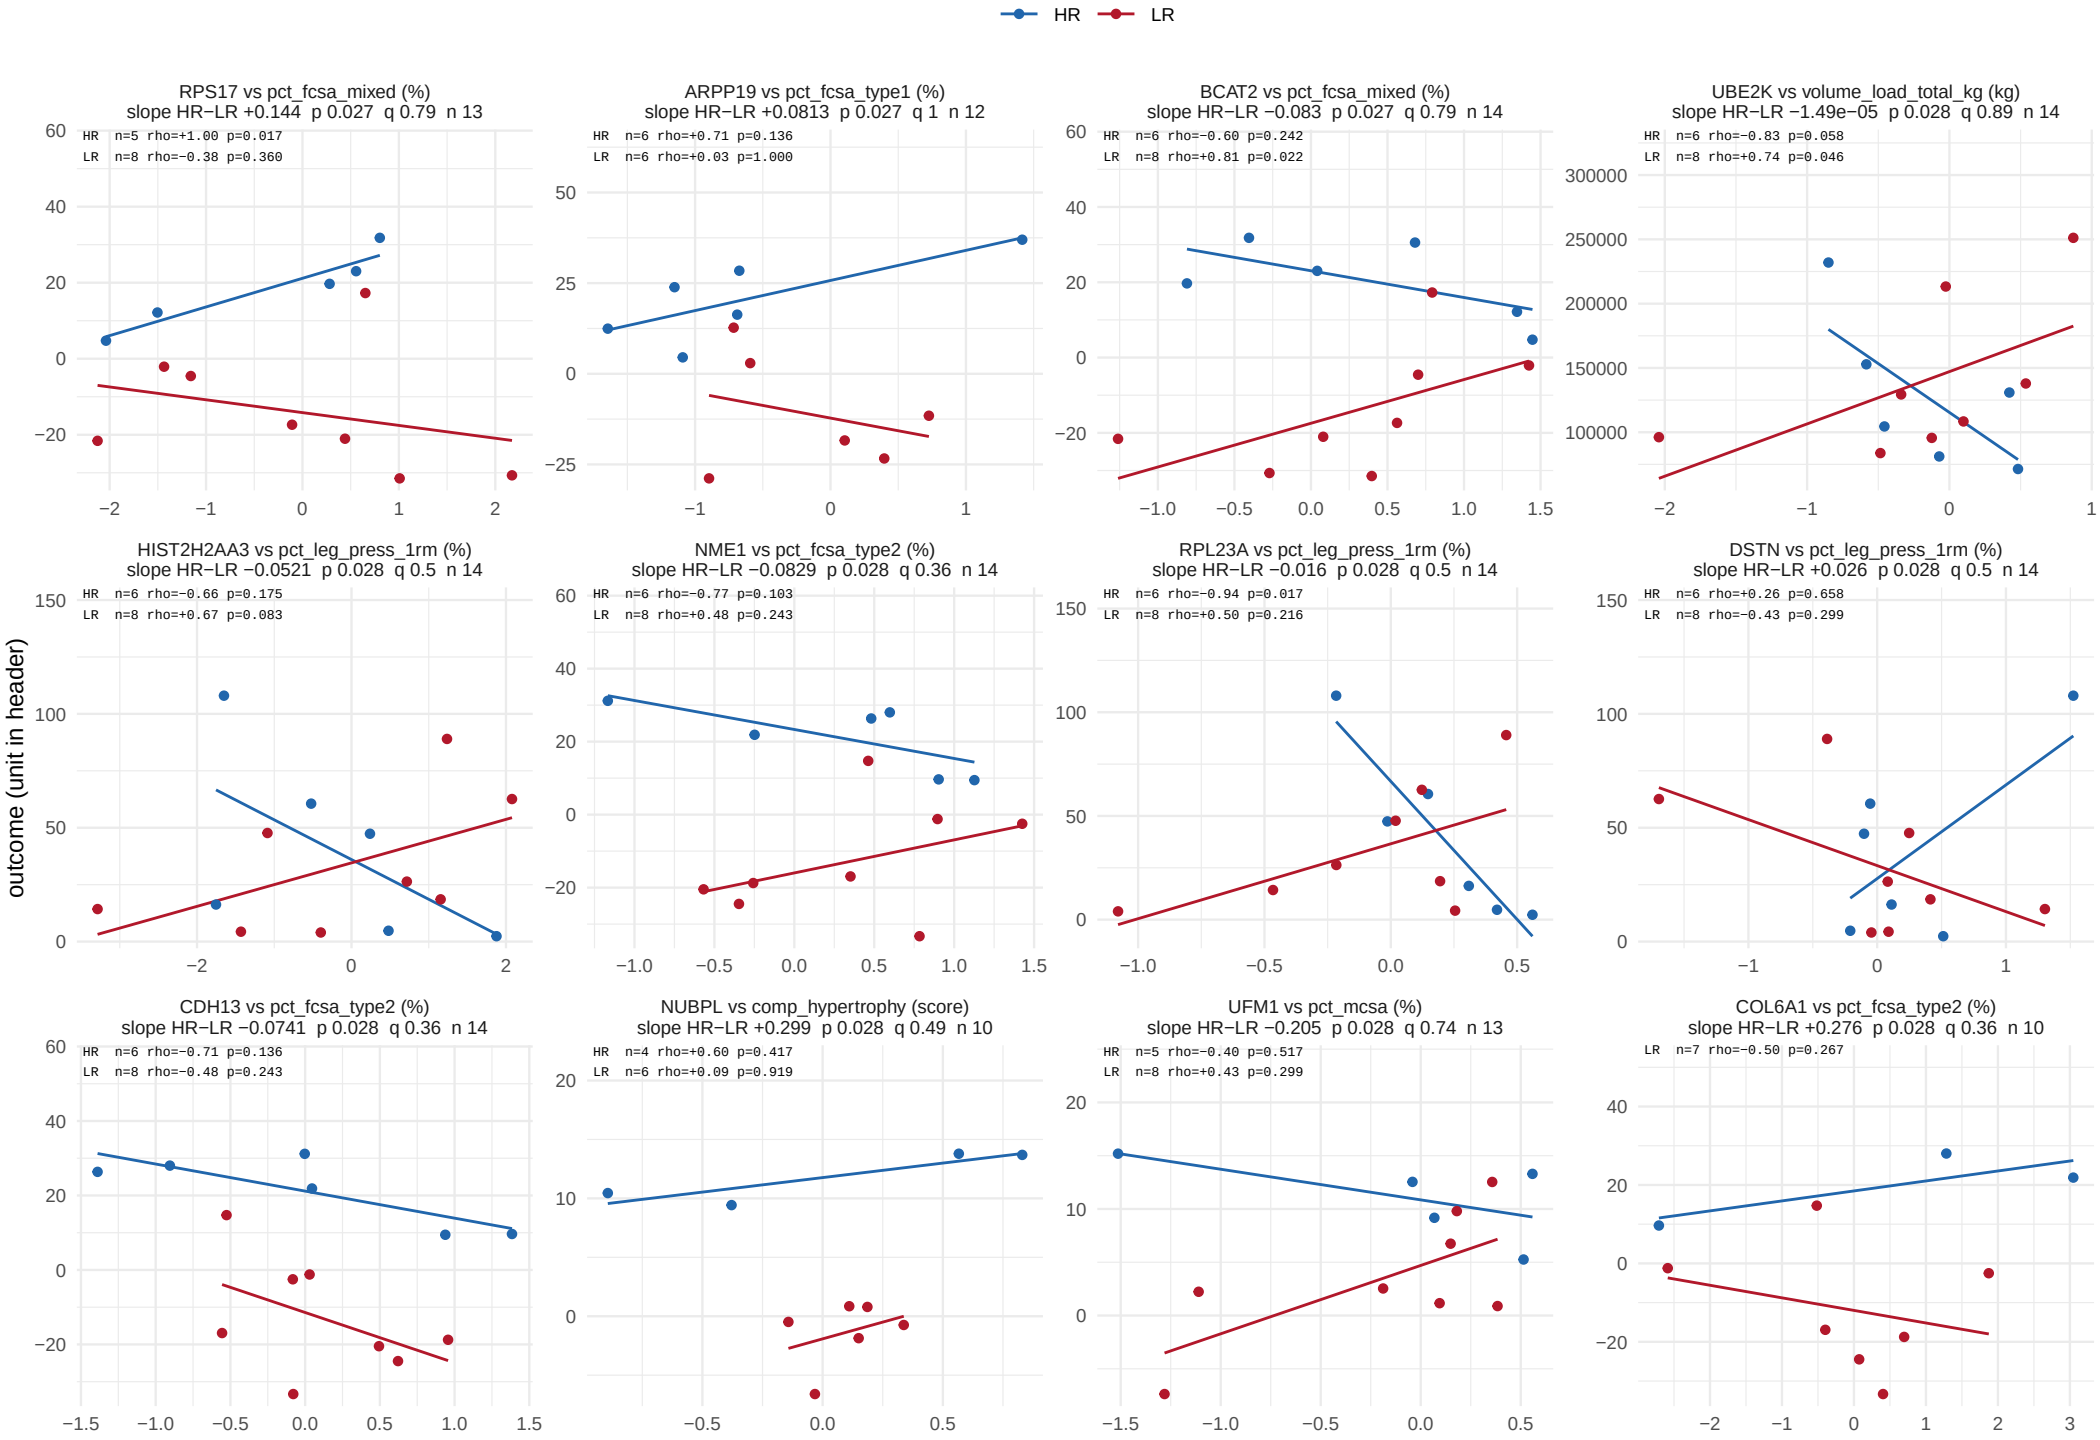

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


735 of 11282 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 39 of 62.

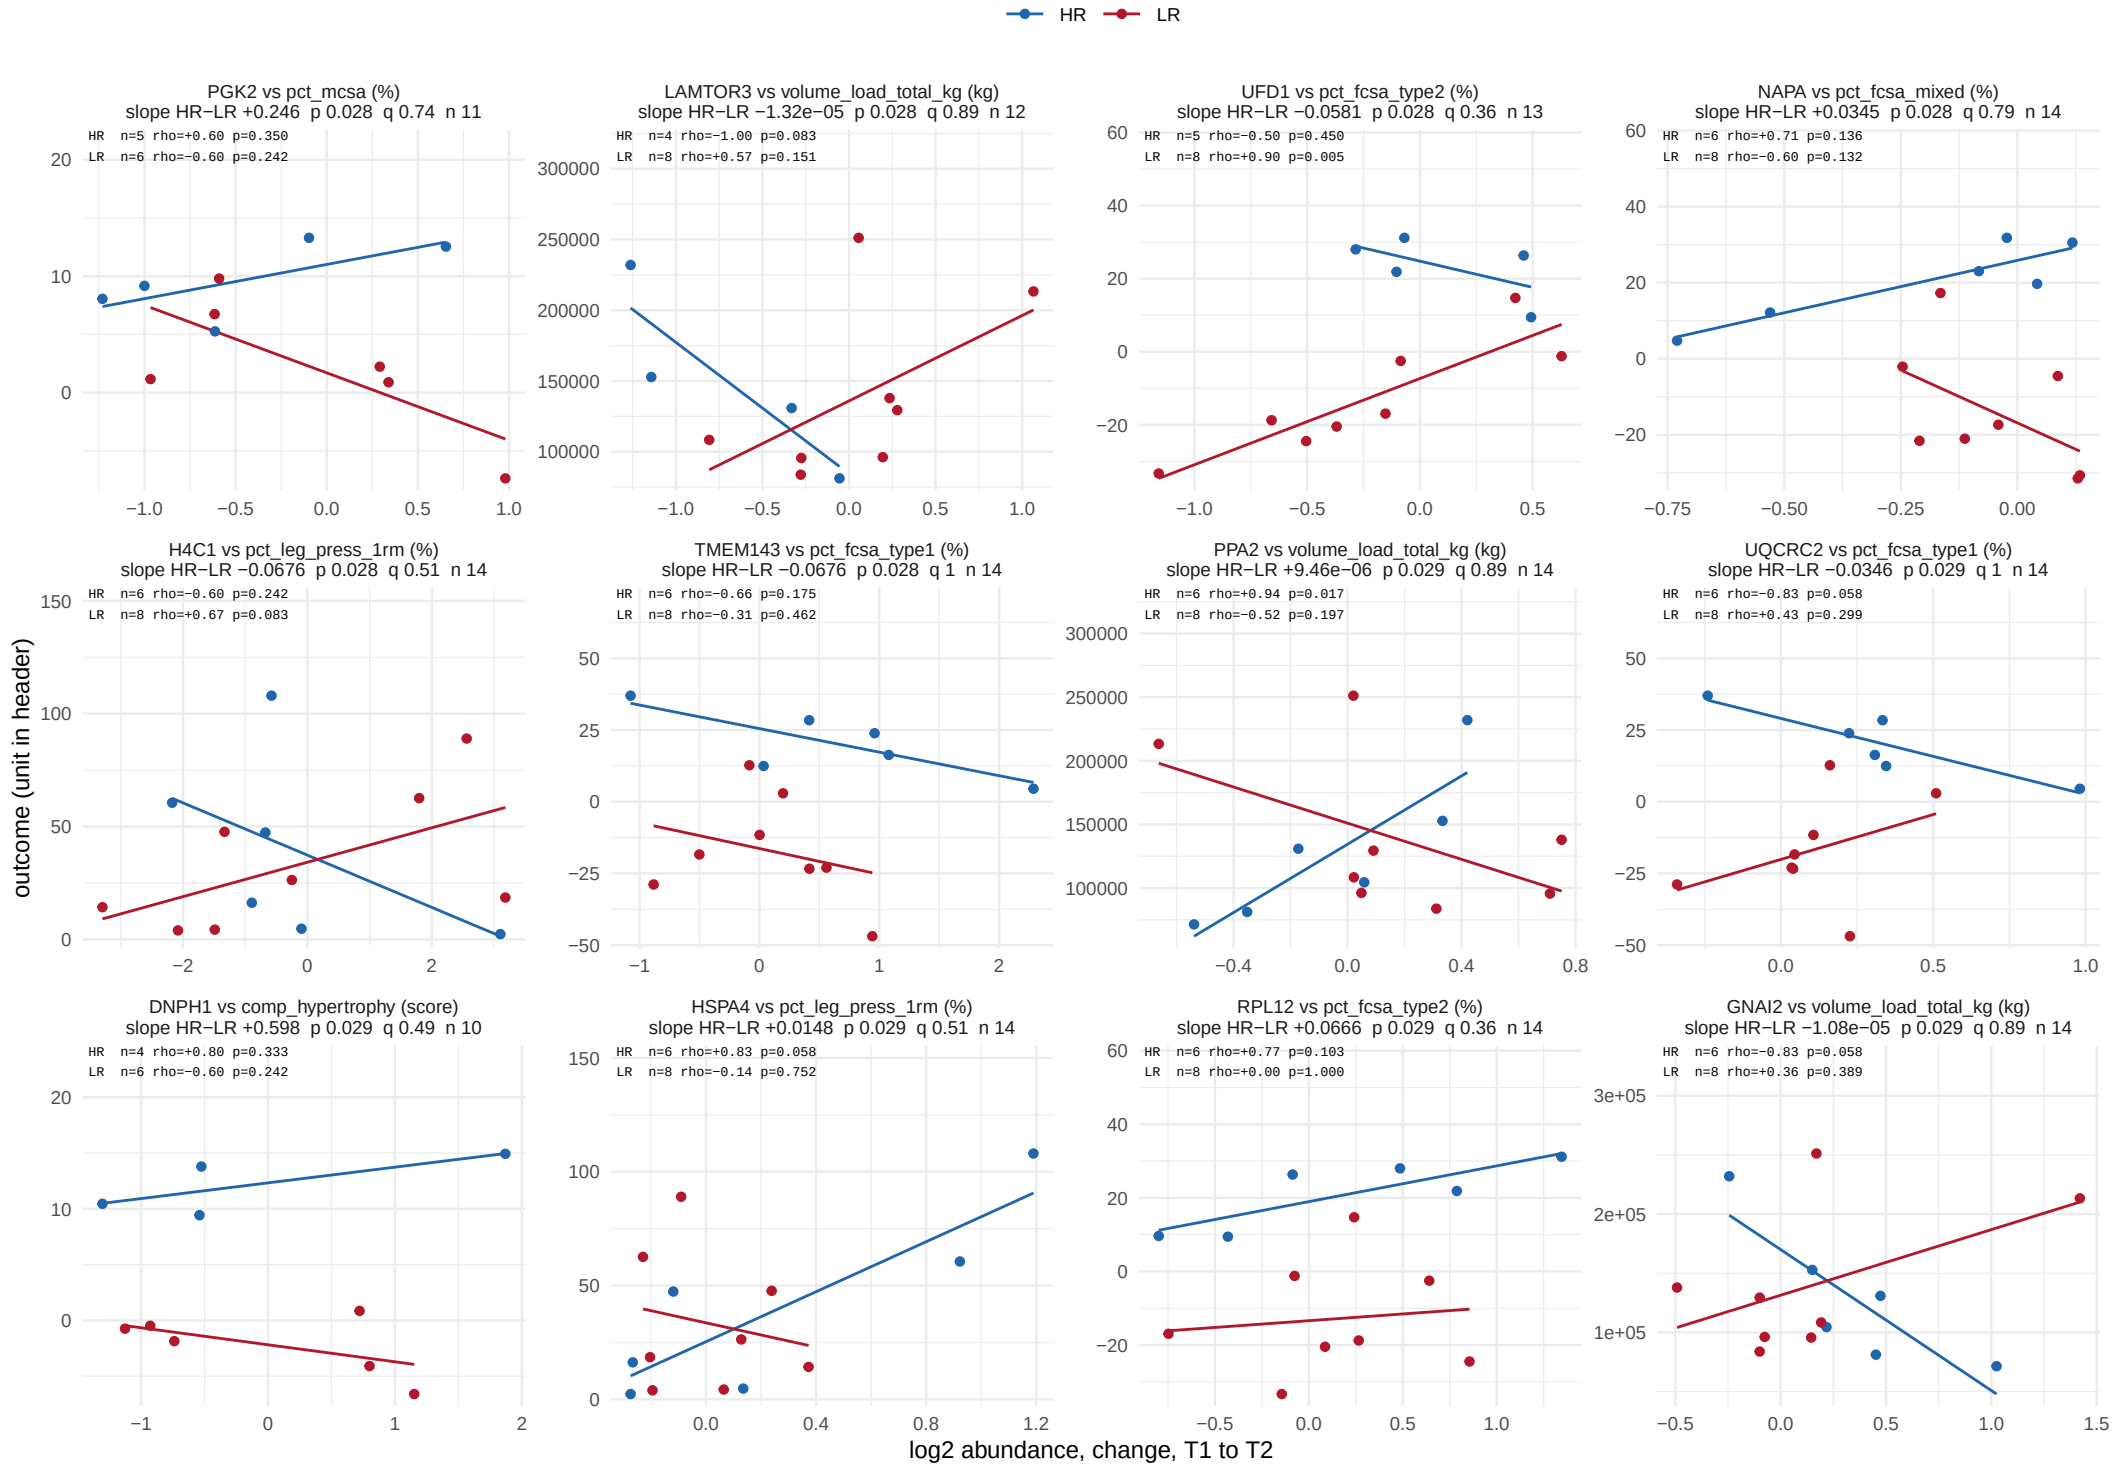

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


735 of 11282 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 40 of 62.

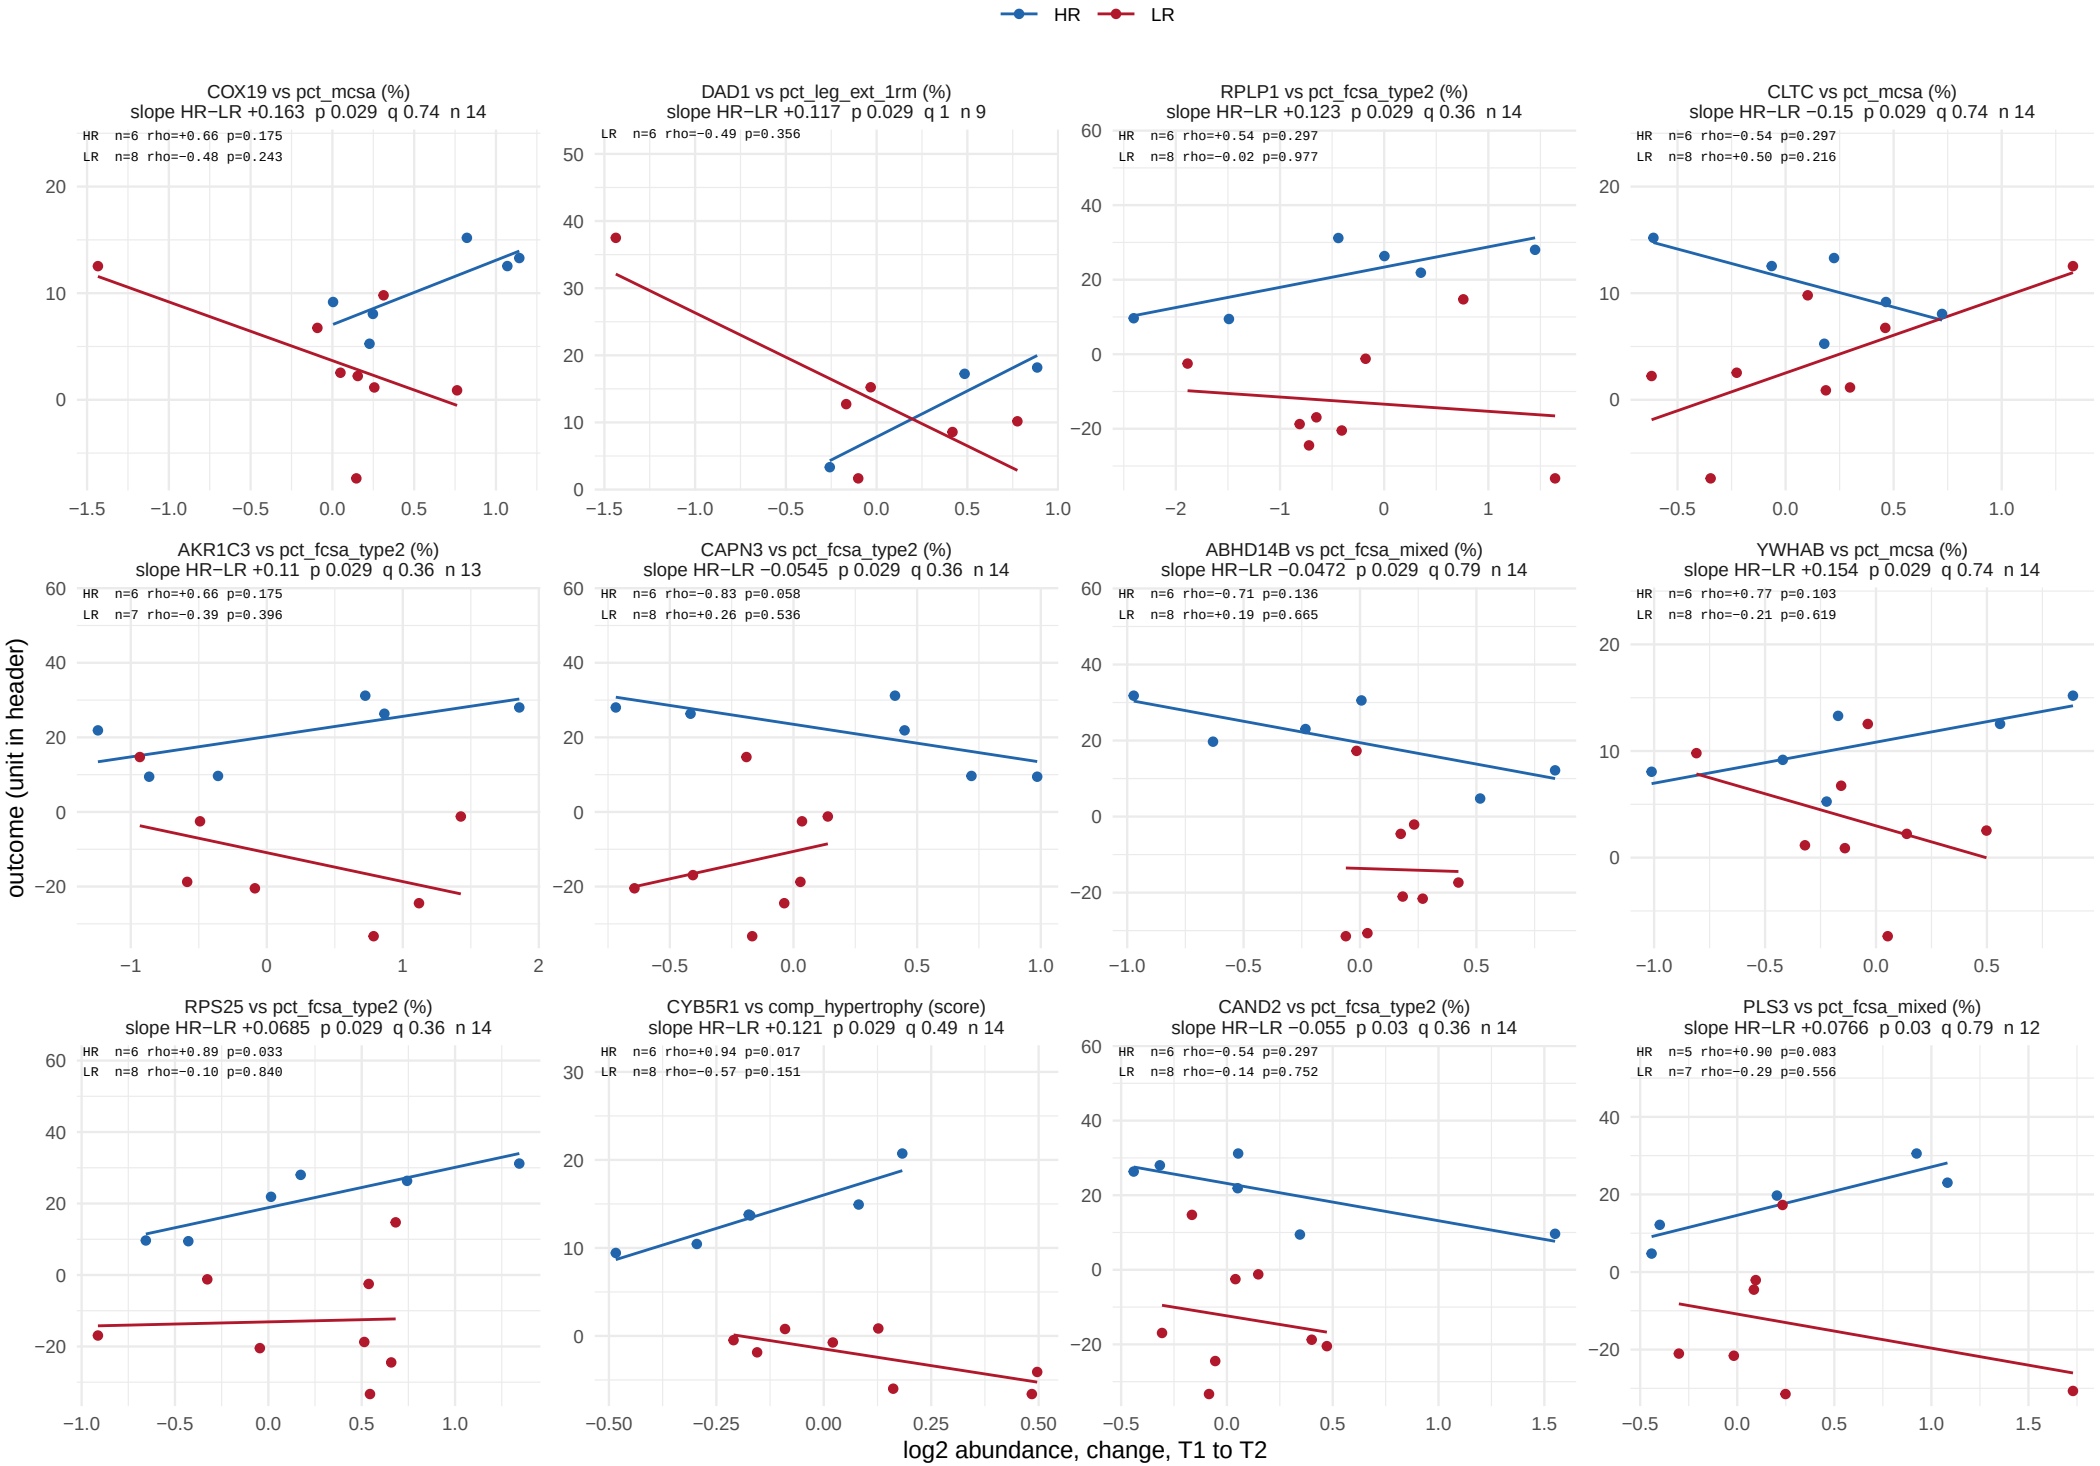

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


735 of 11282 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 41 of 62.

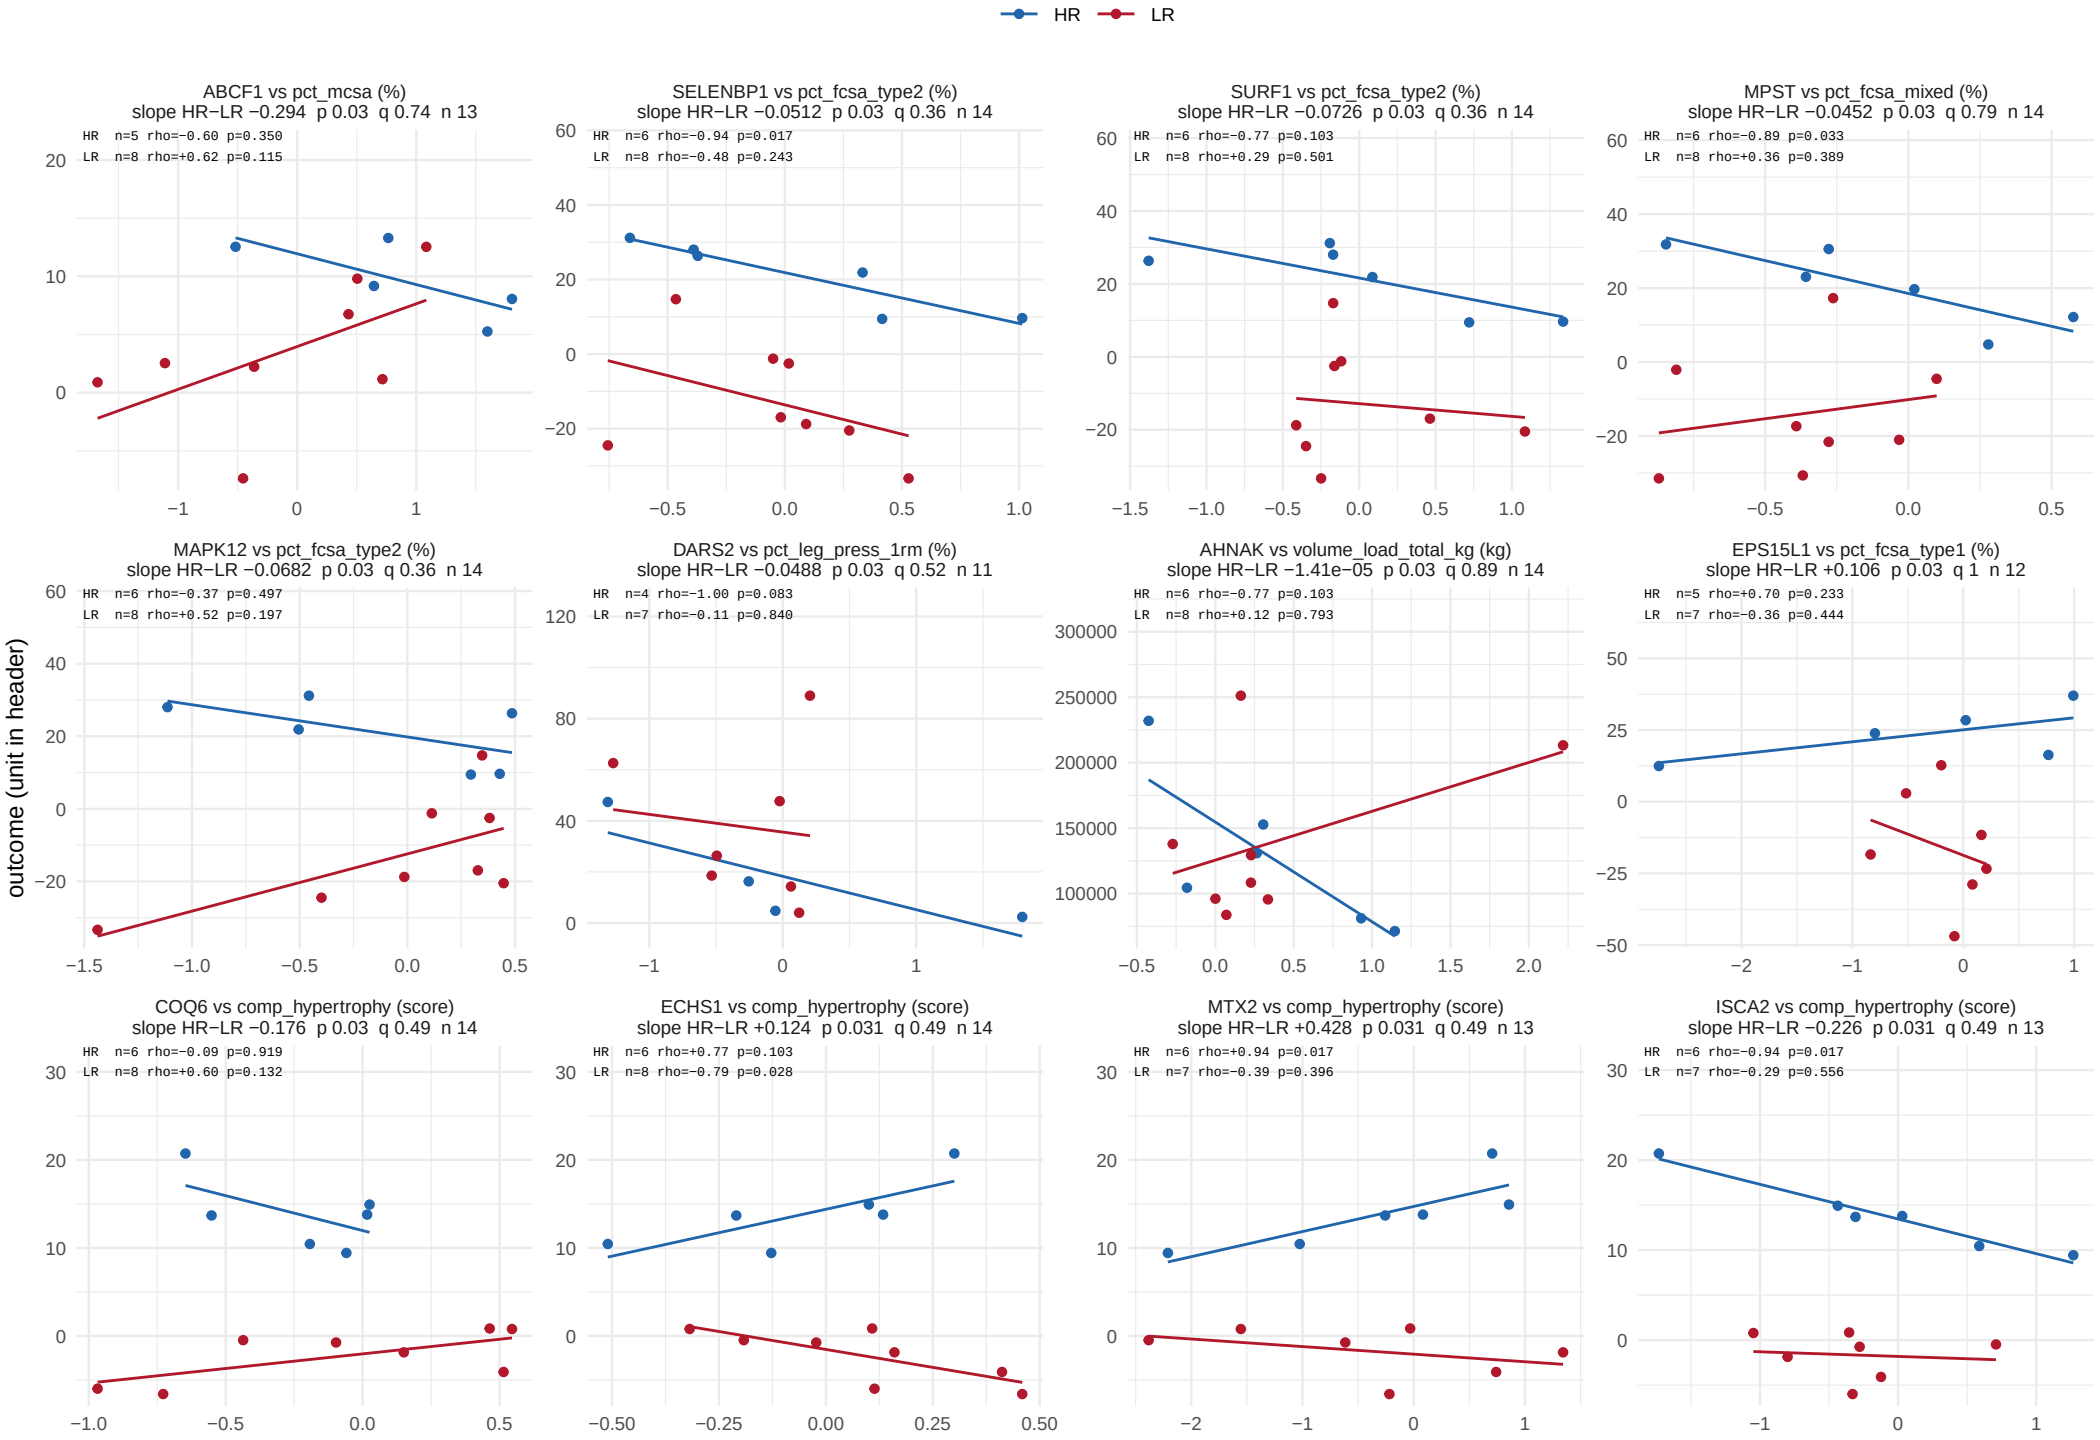

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


735 of 11282 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 42 of 62.

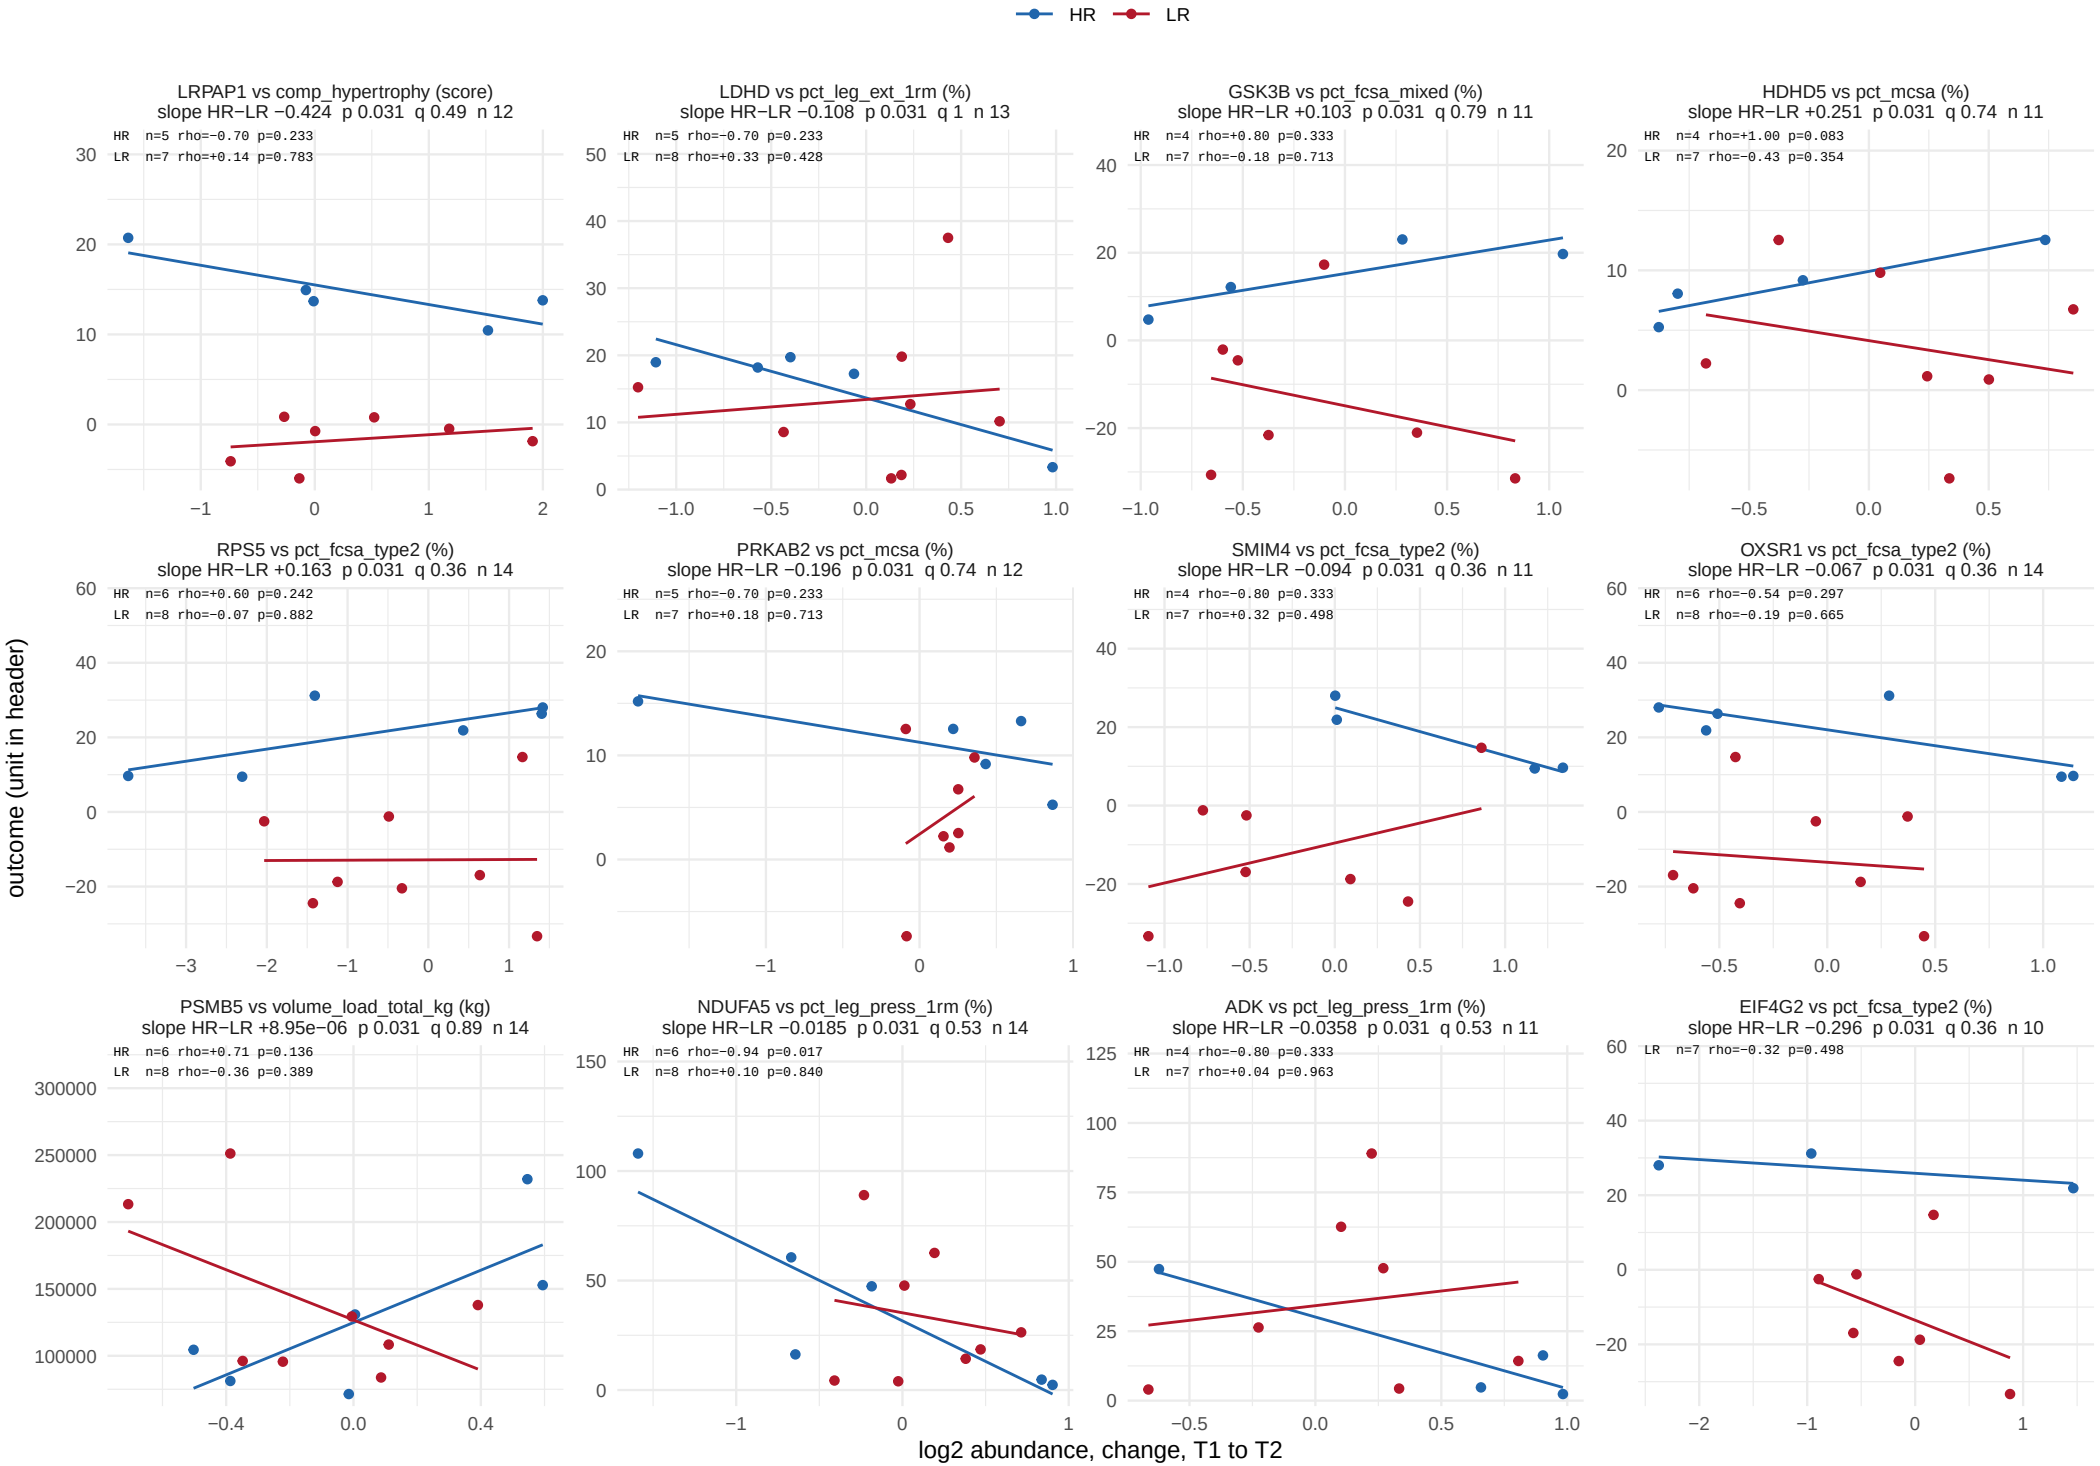

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


735 of 11282 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 43 of 62.

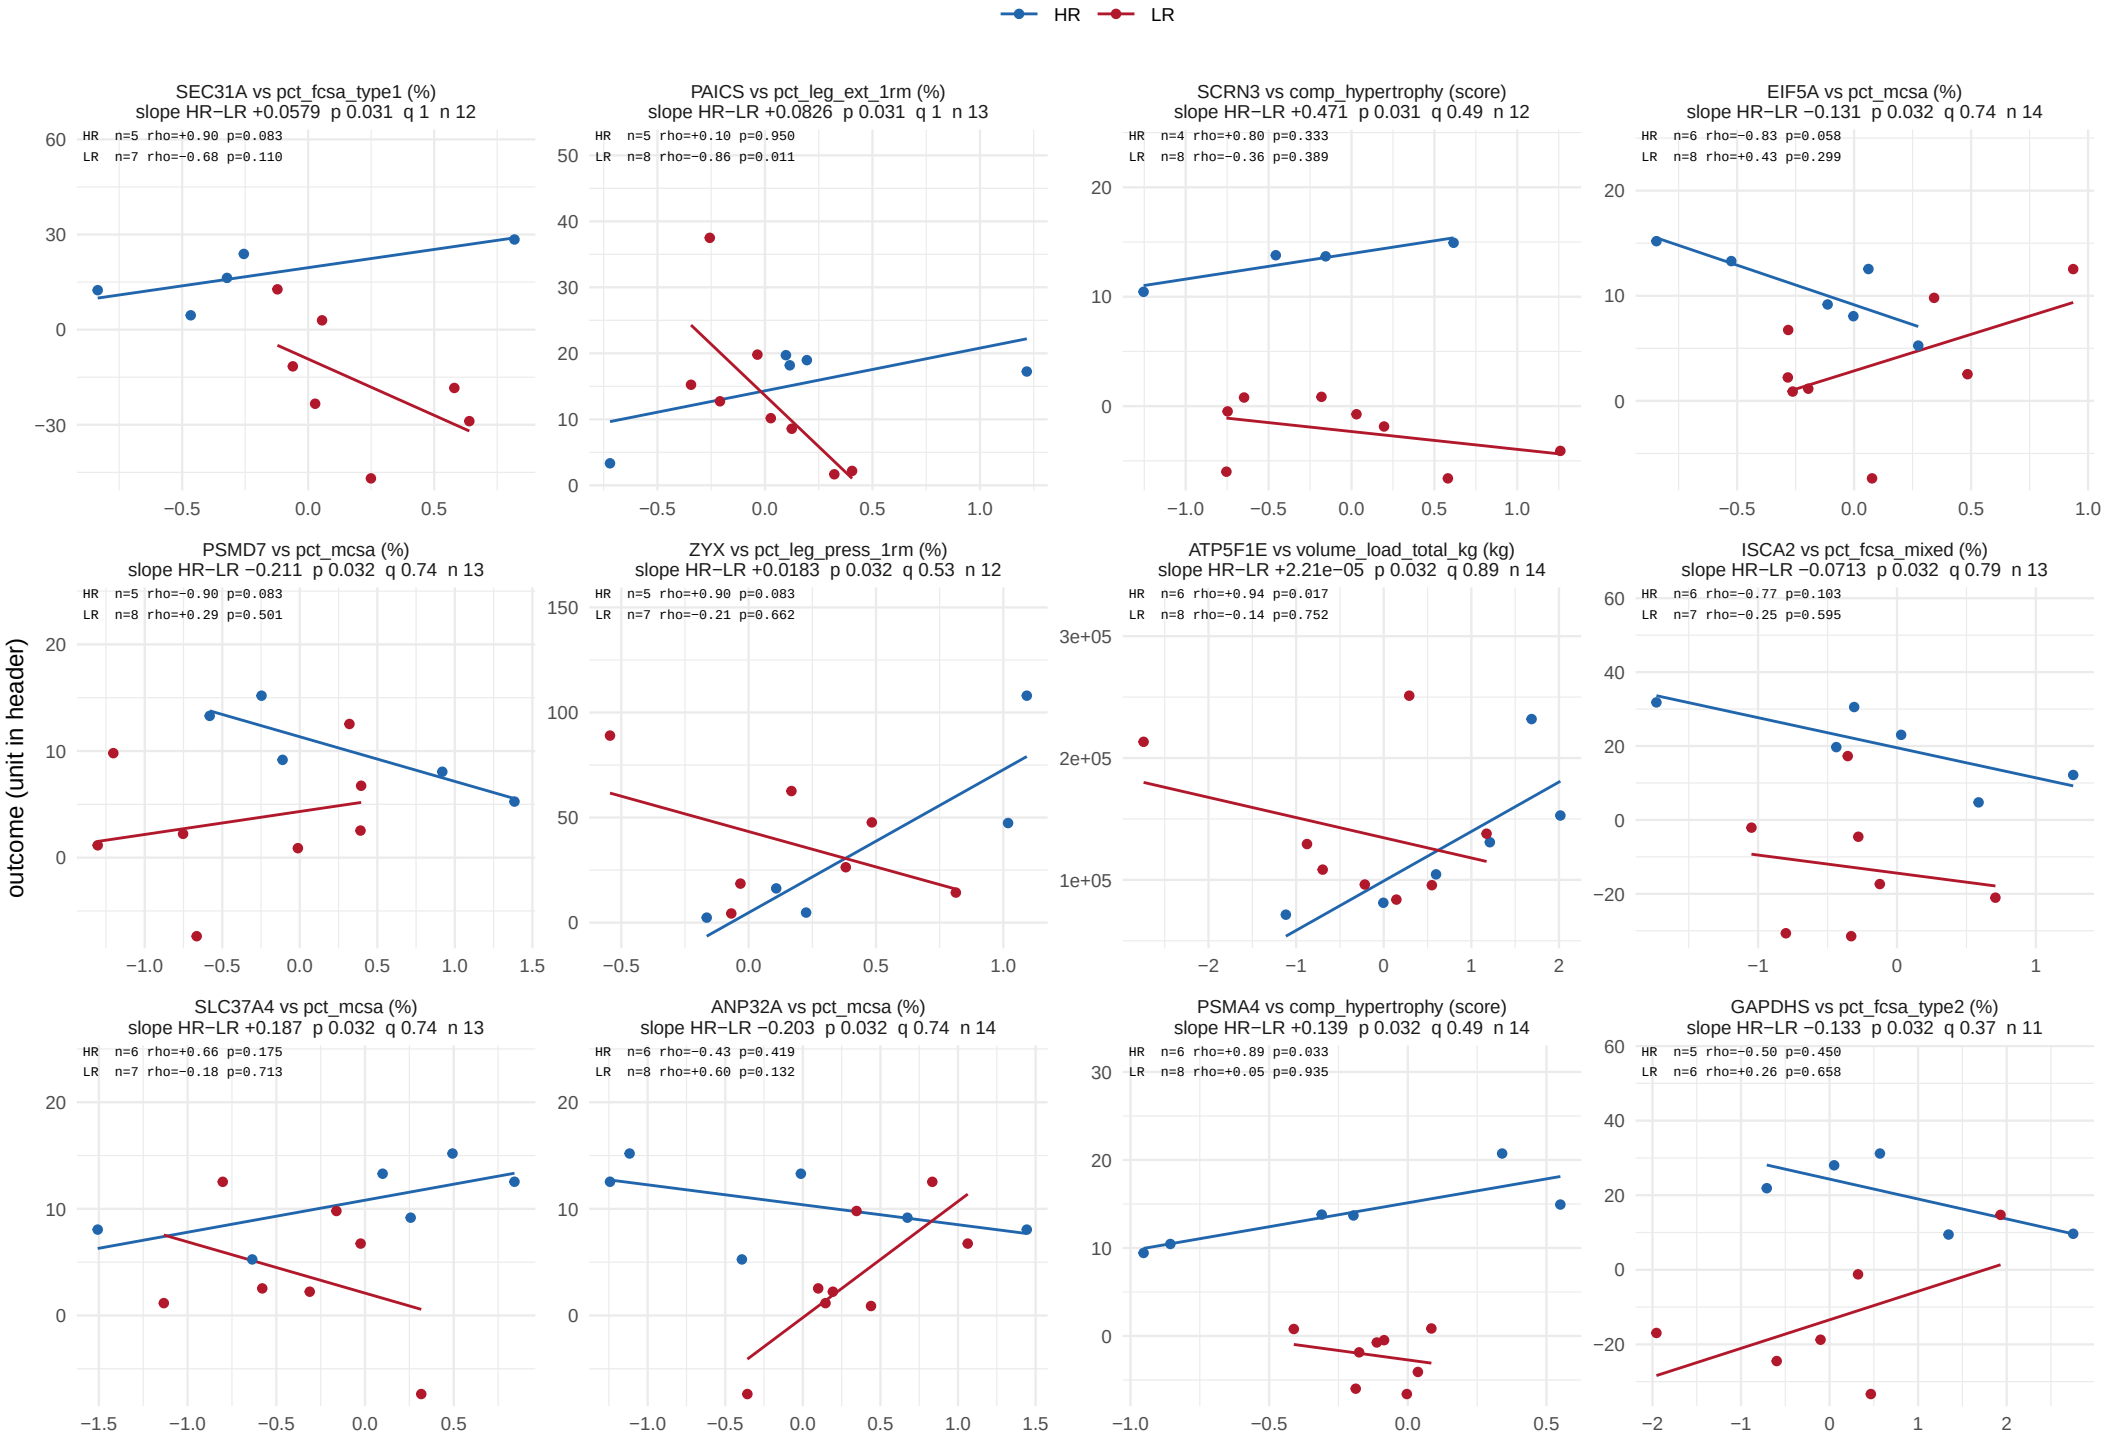

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


735 of 11282 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 44 of 62.

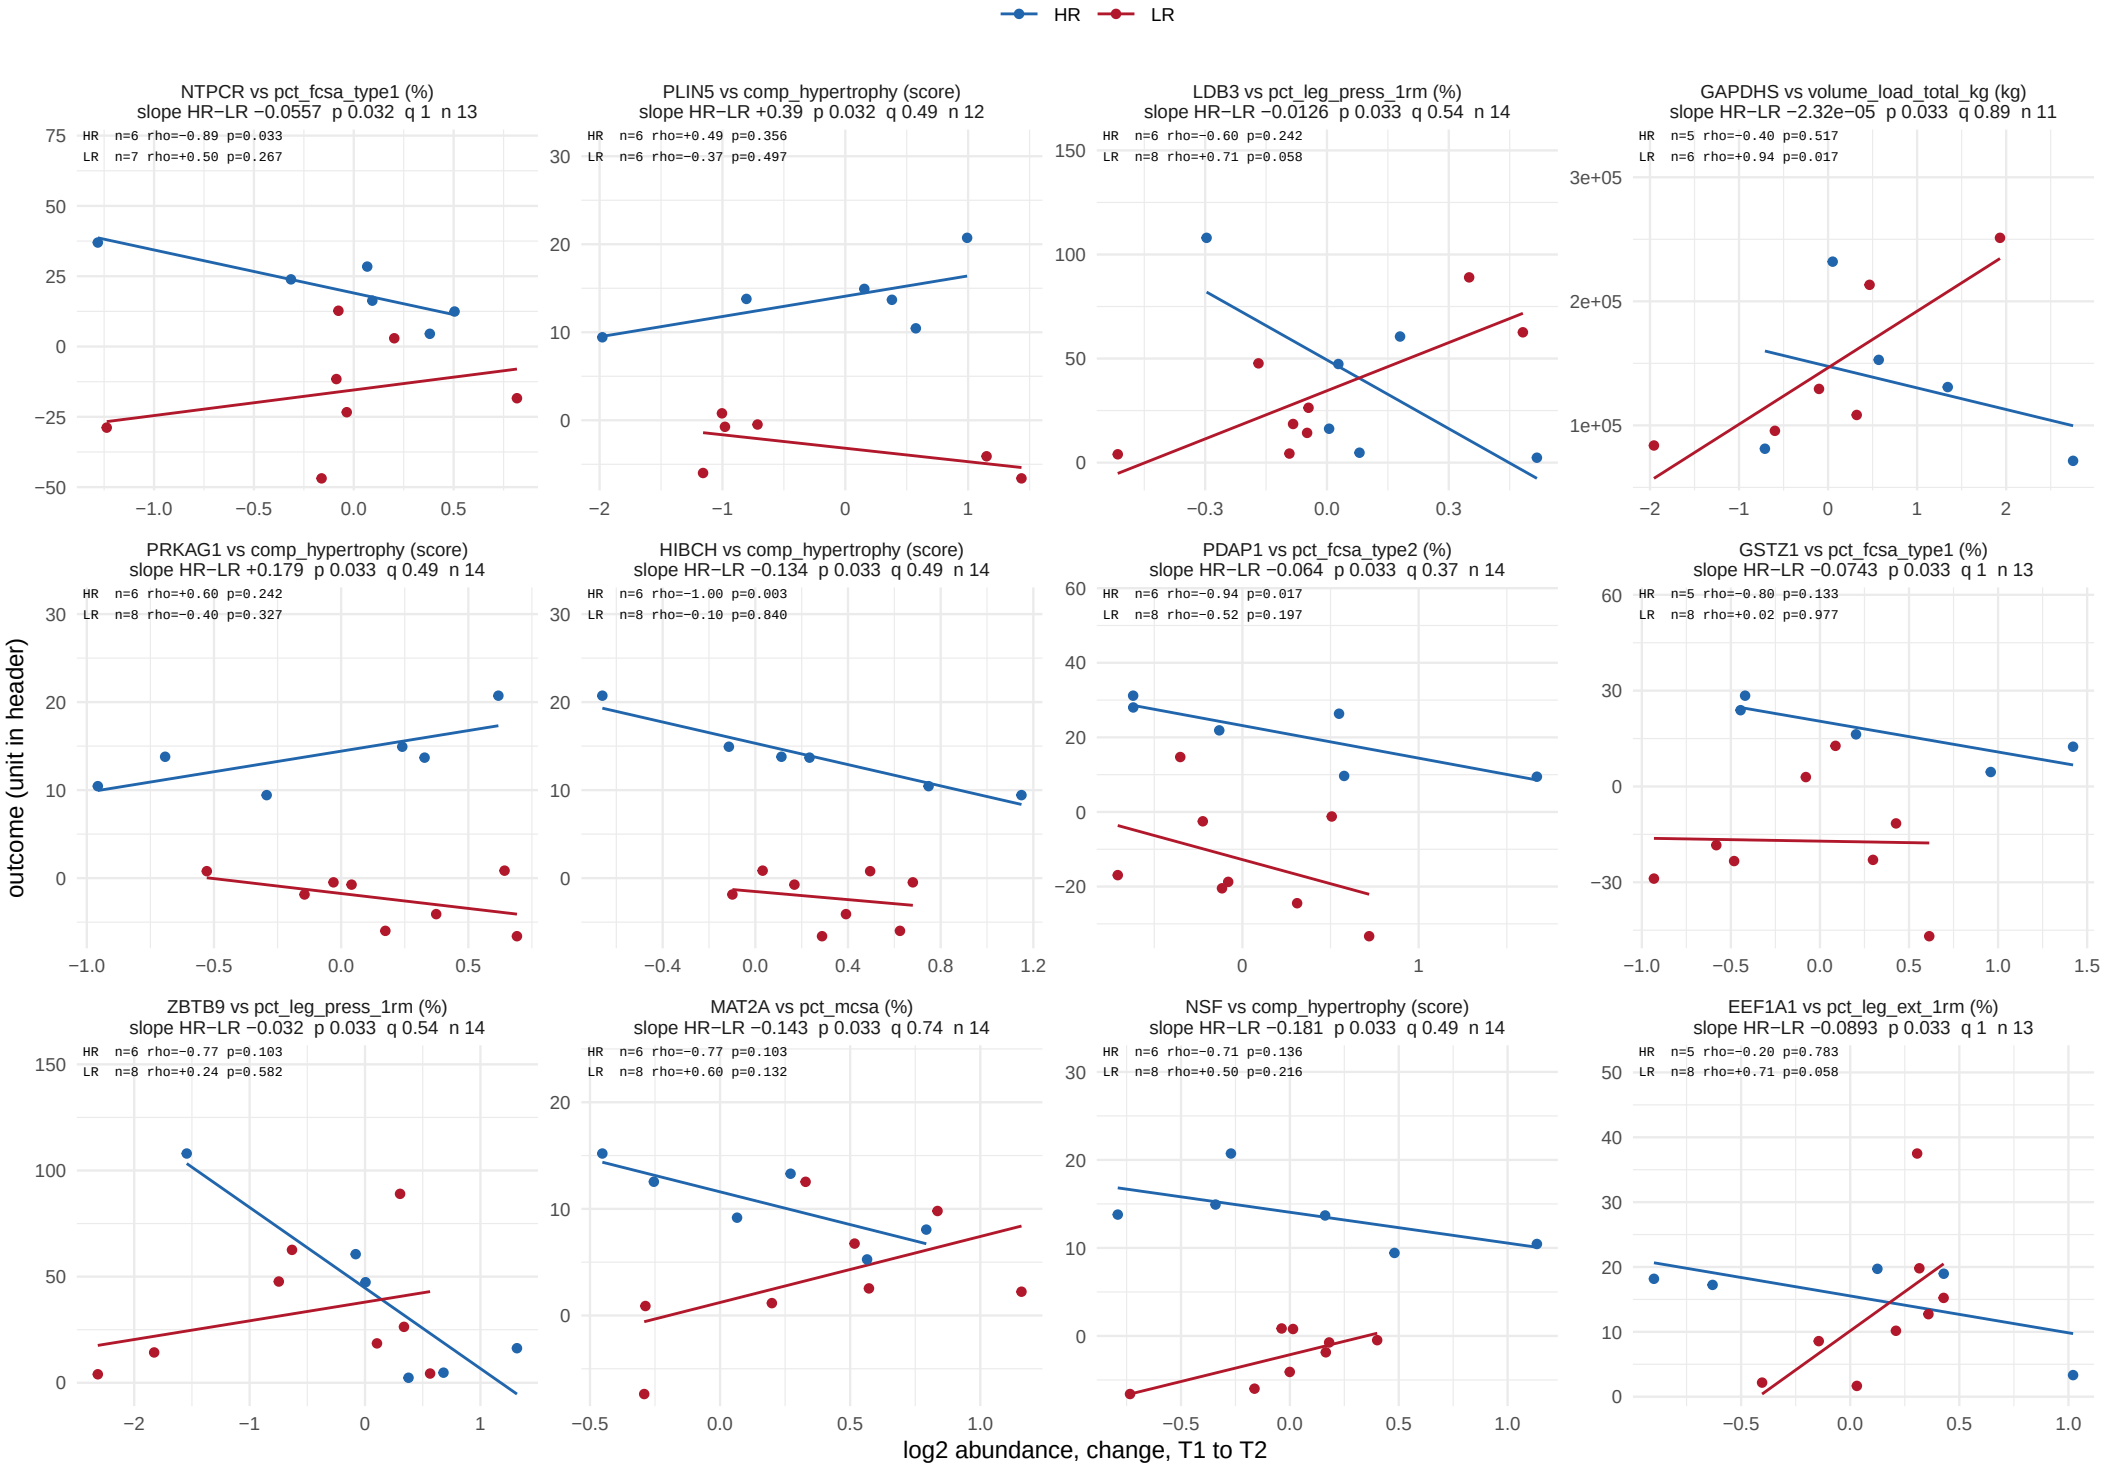

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


735 of 11282 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 45 of 62.

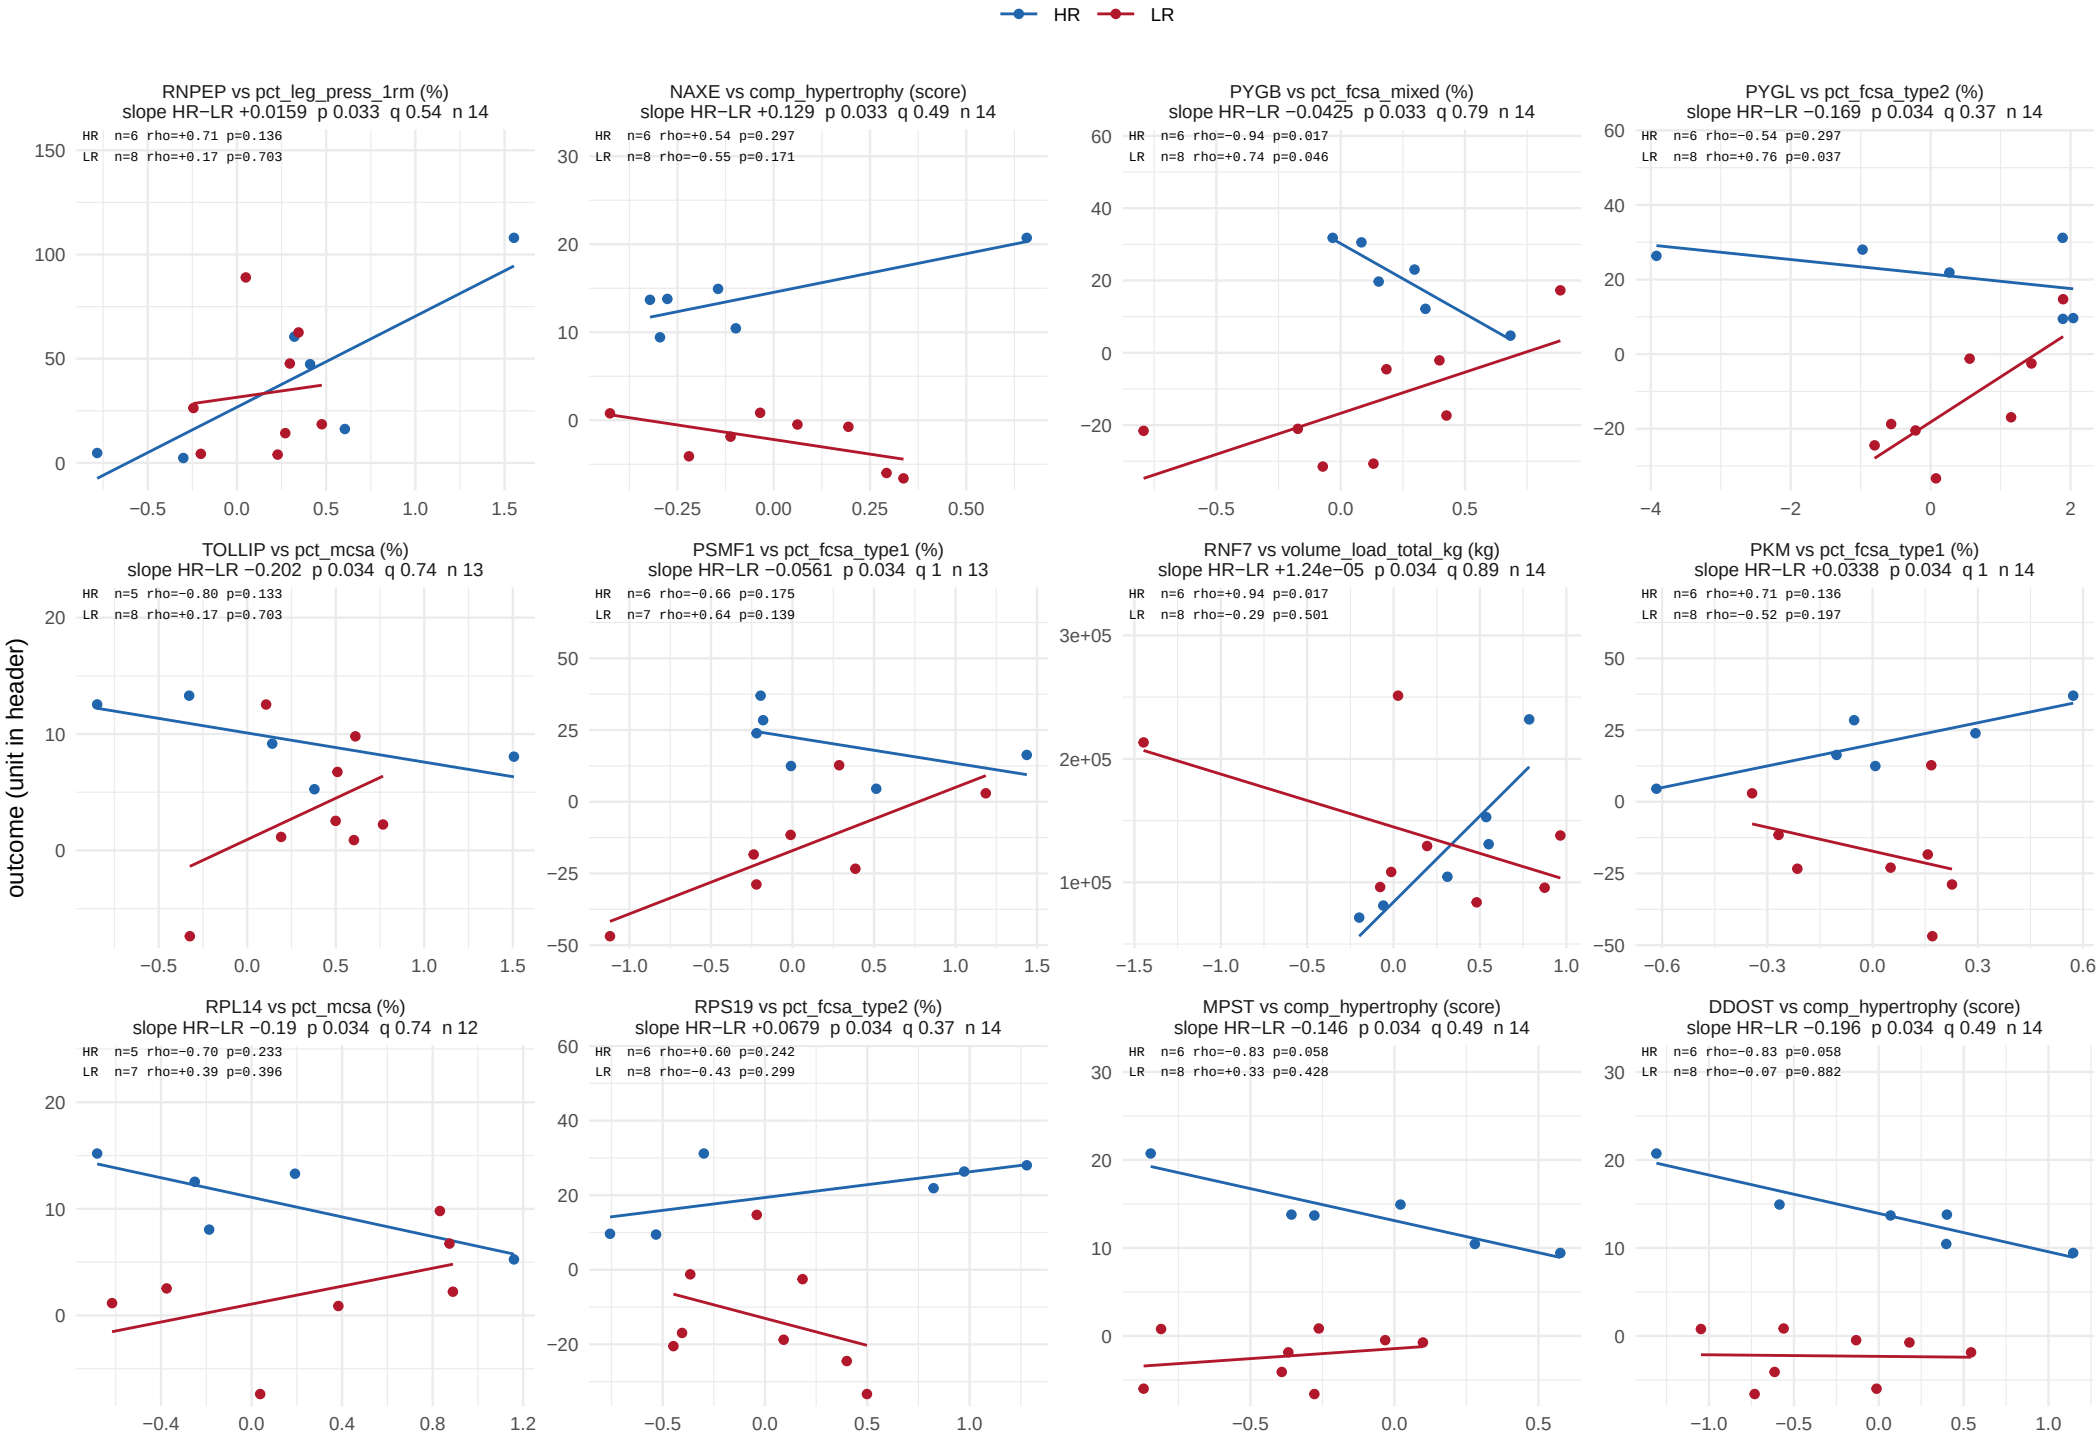

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


735 of 11282 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 46 of 62.

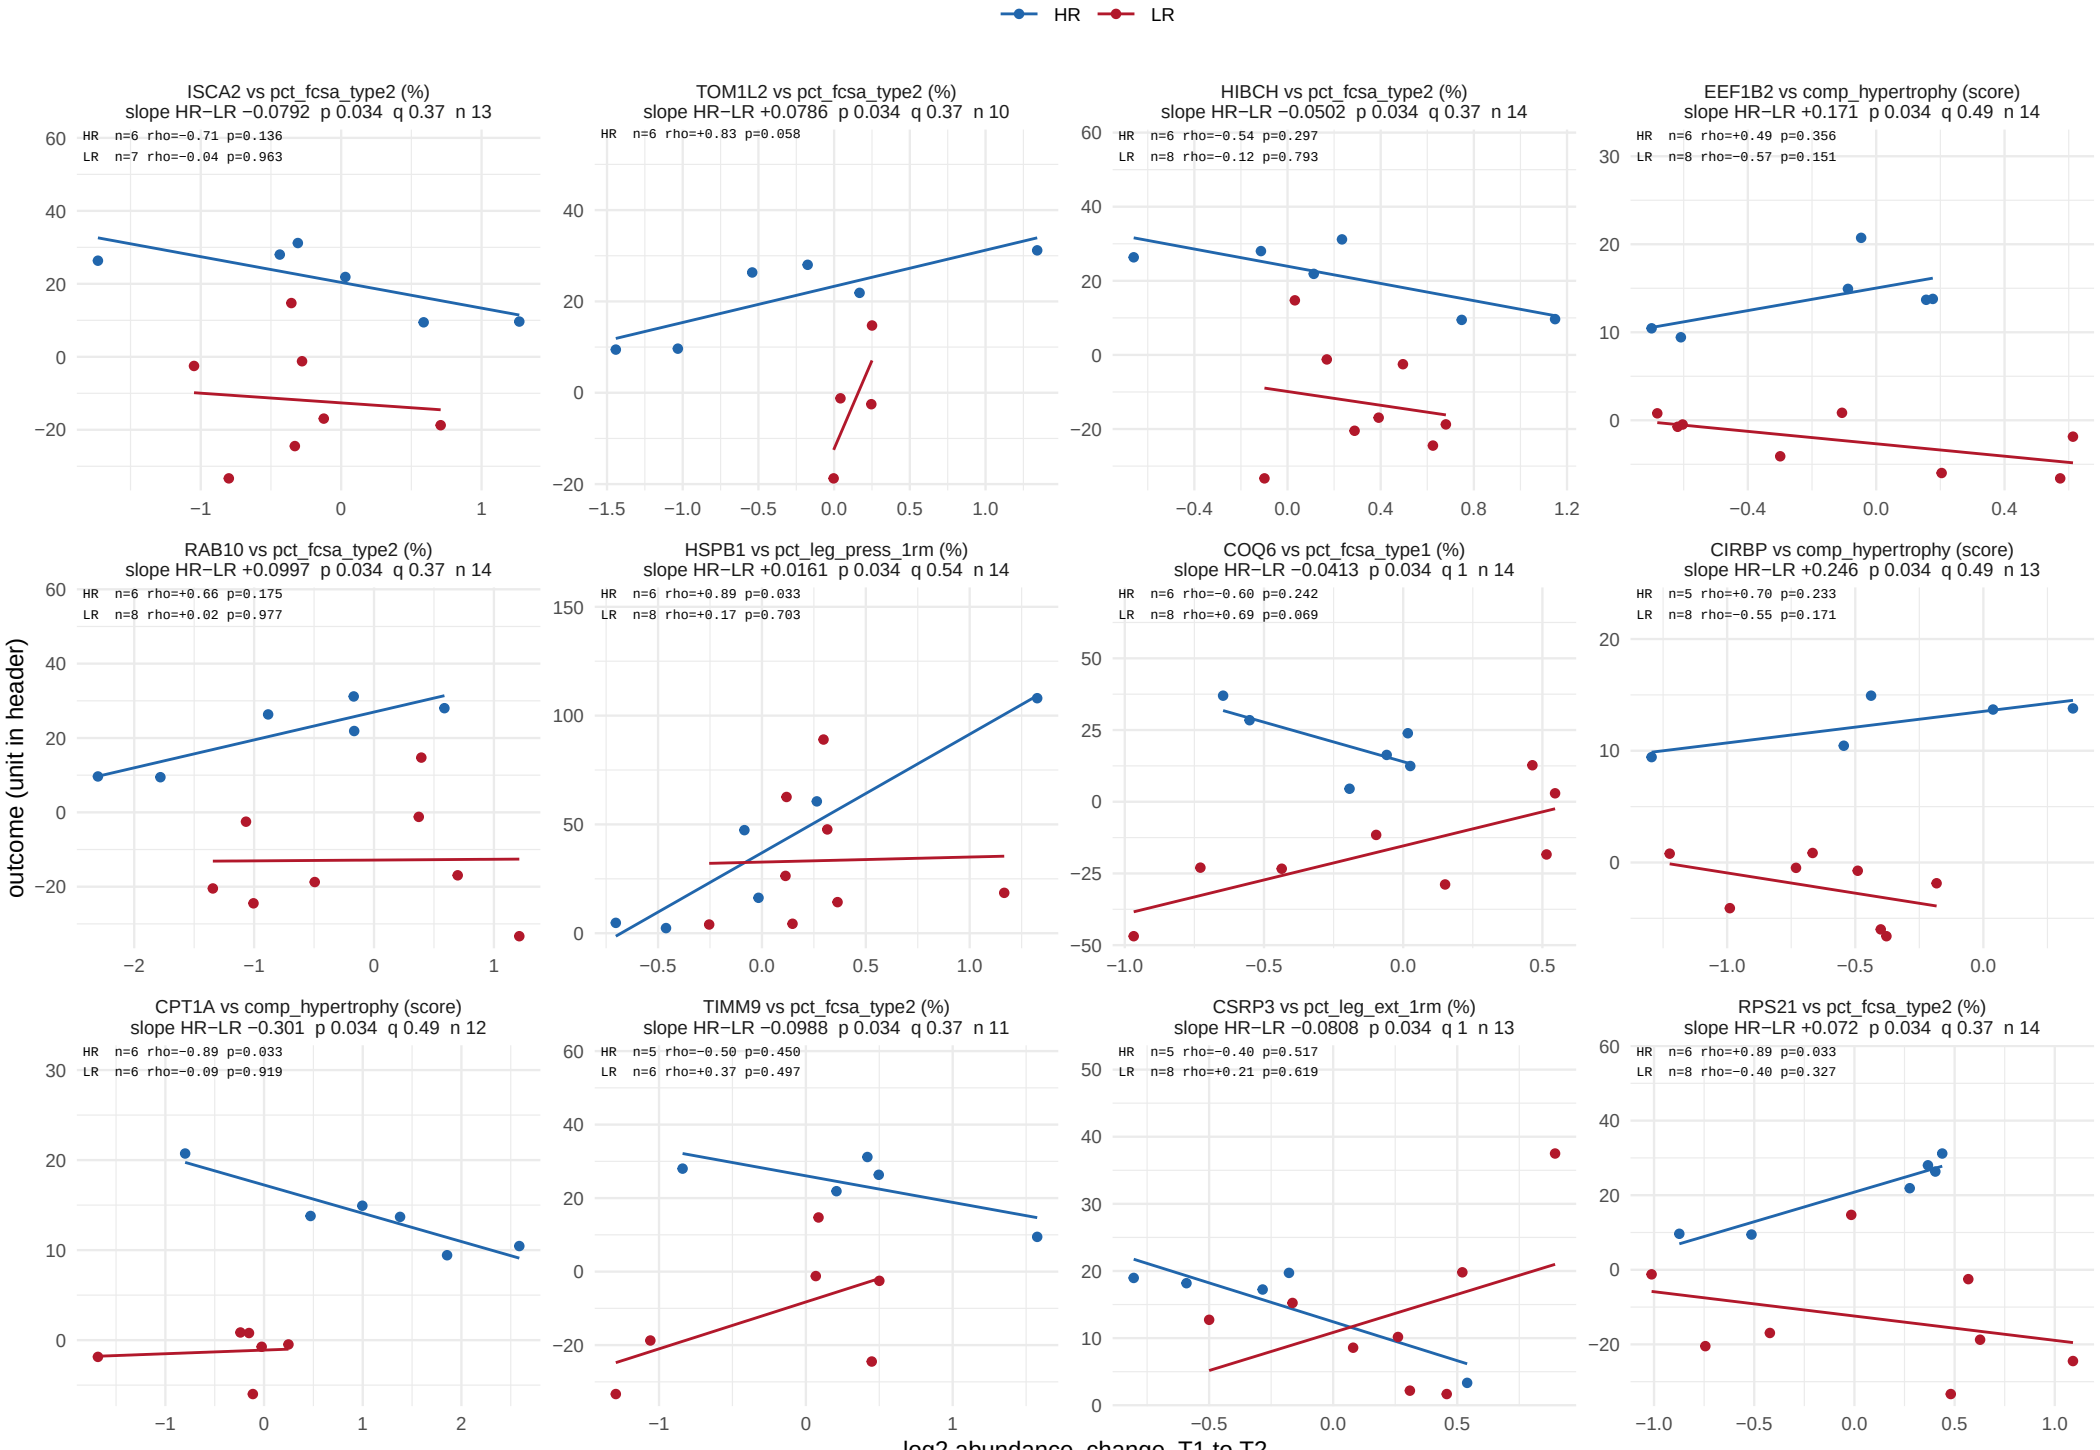

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


735 of 11282 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 47 of 62.

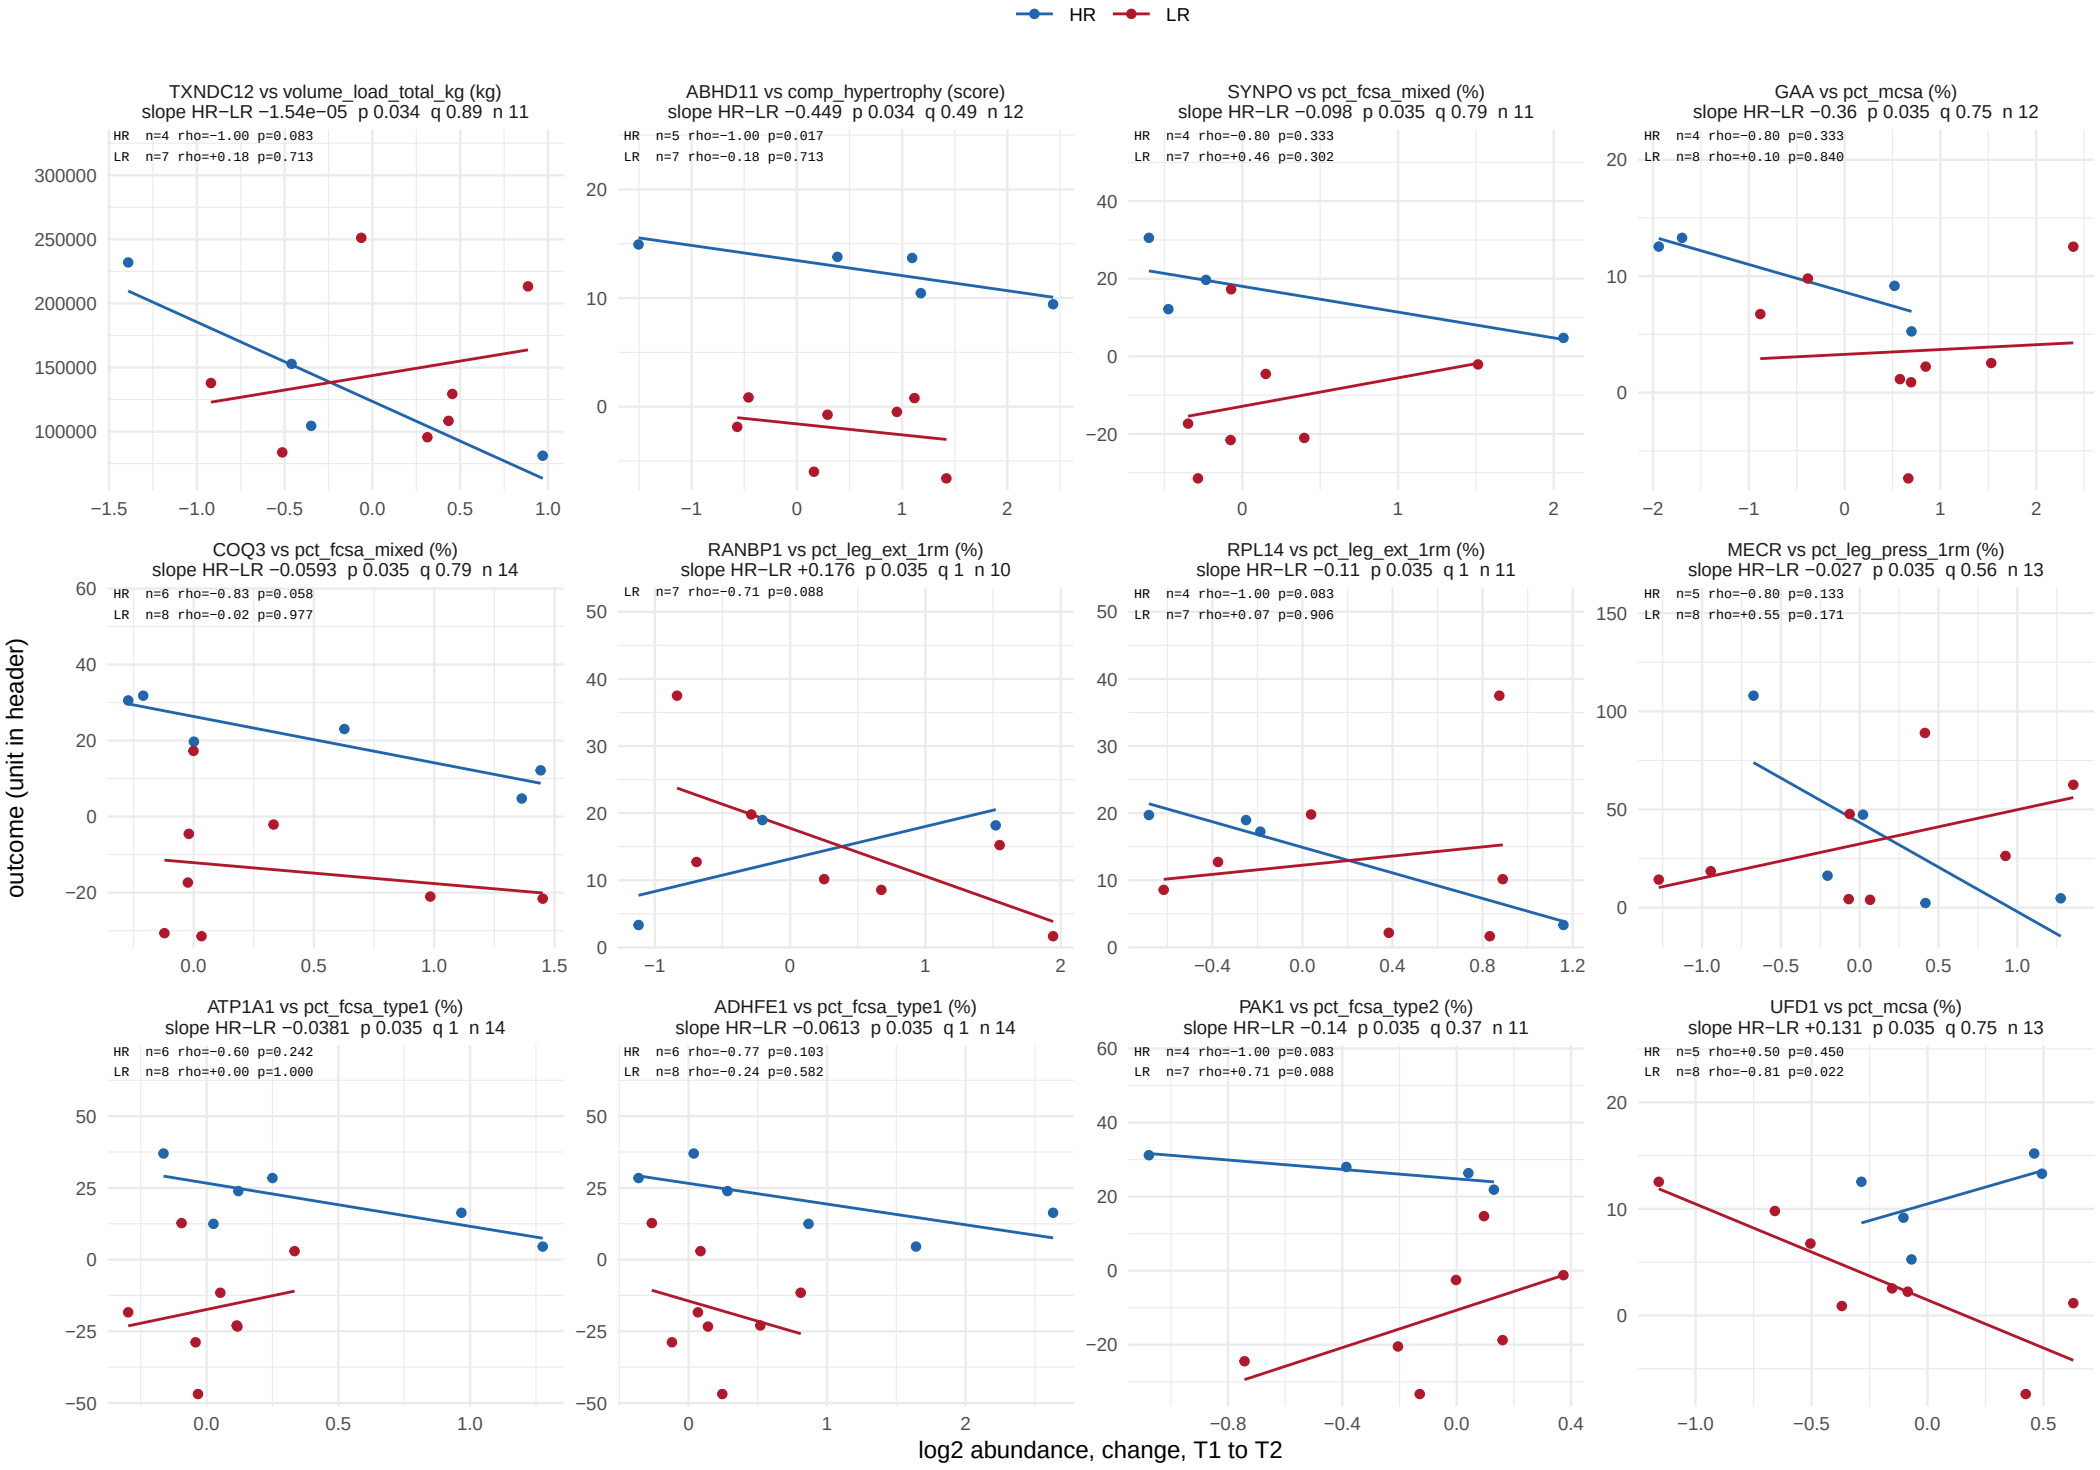

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


735 of 11282 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 48 of 62.

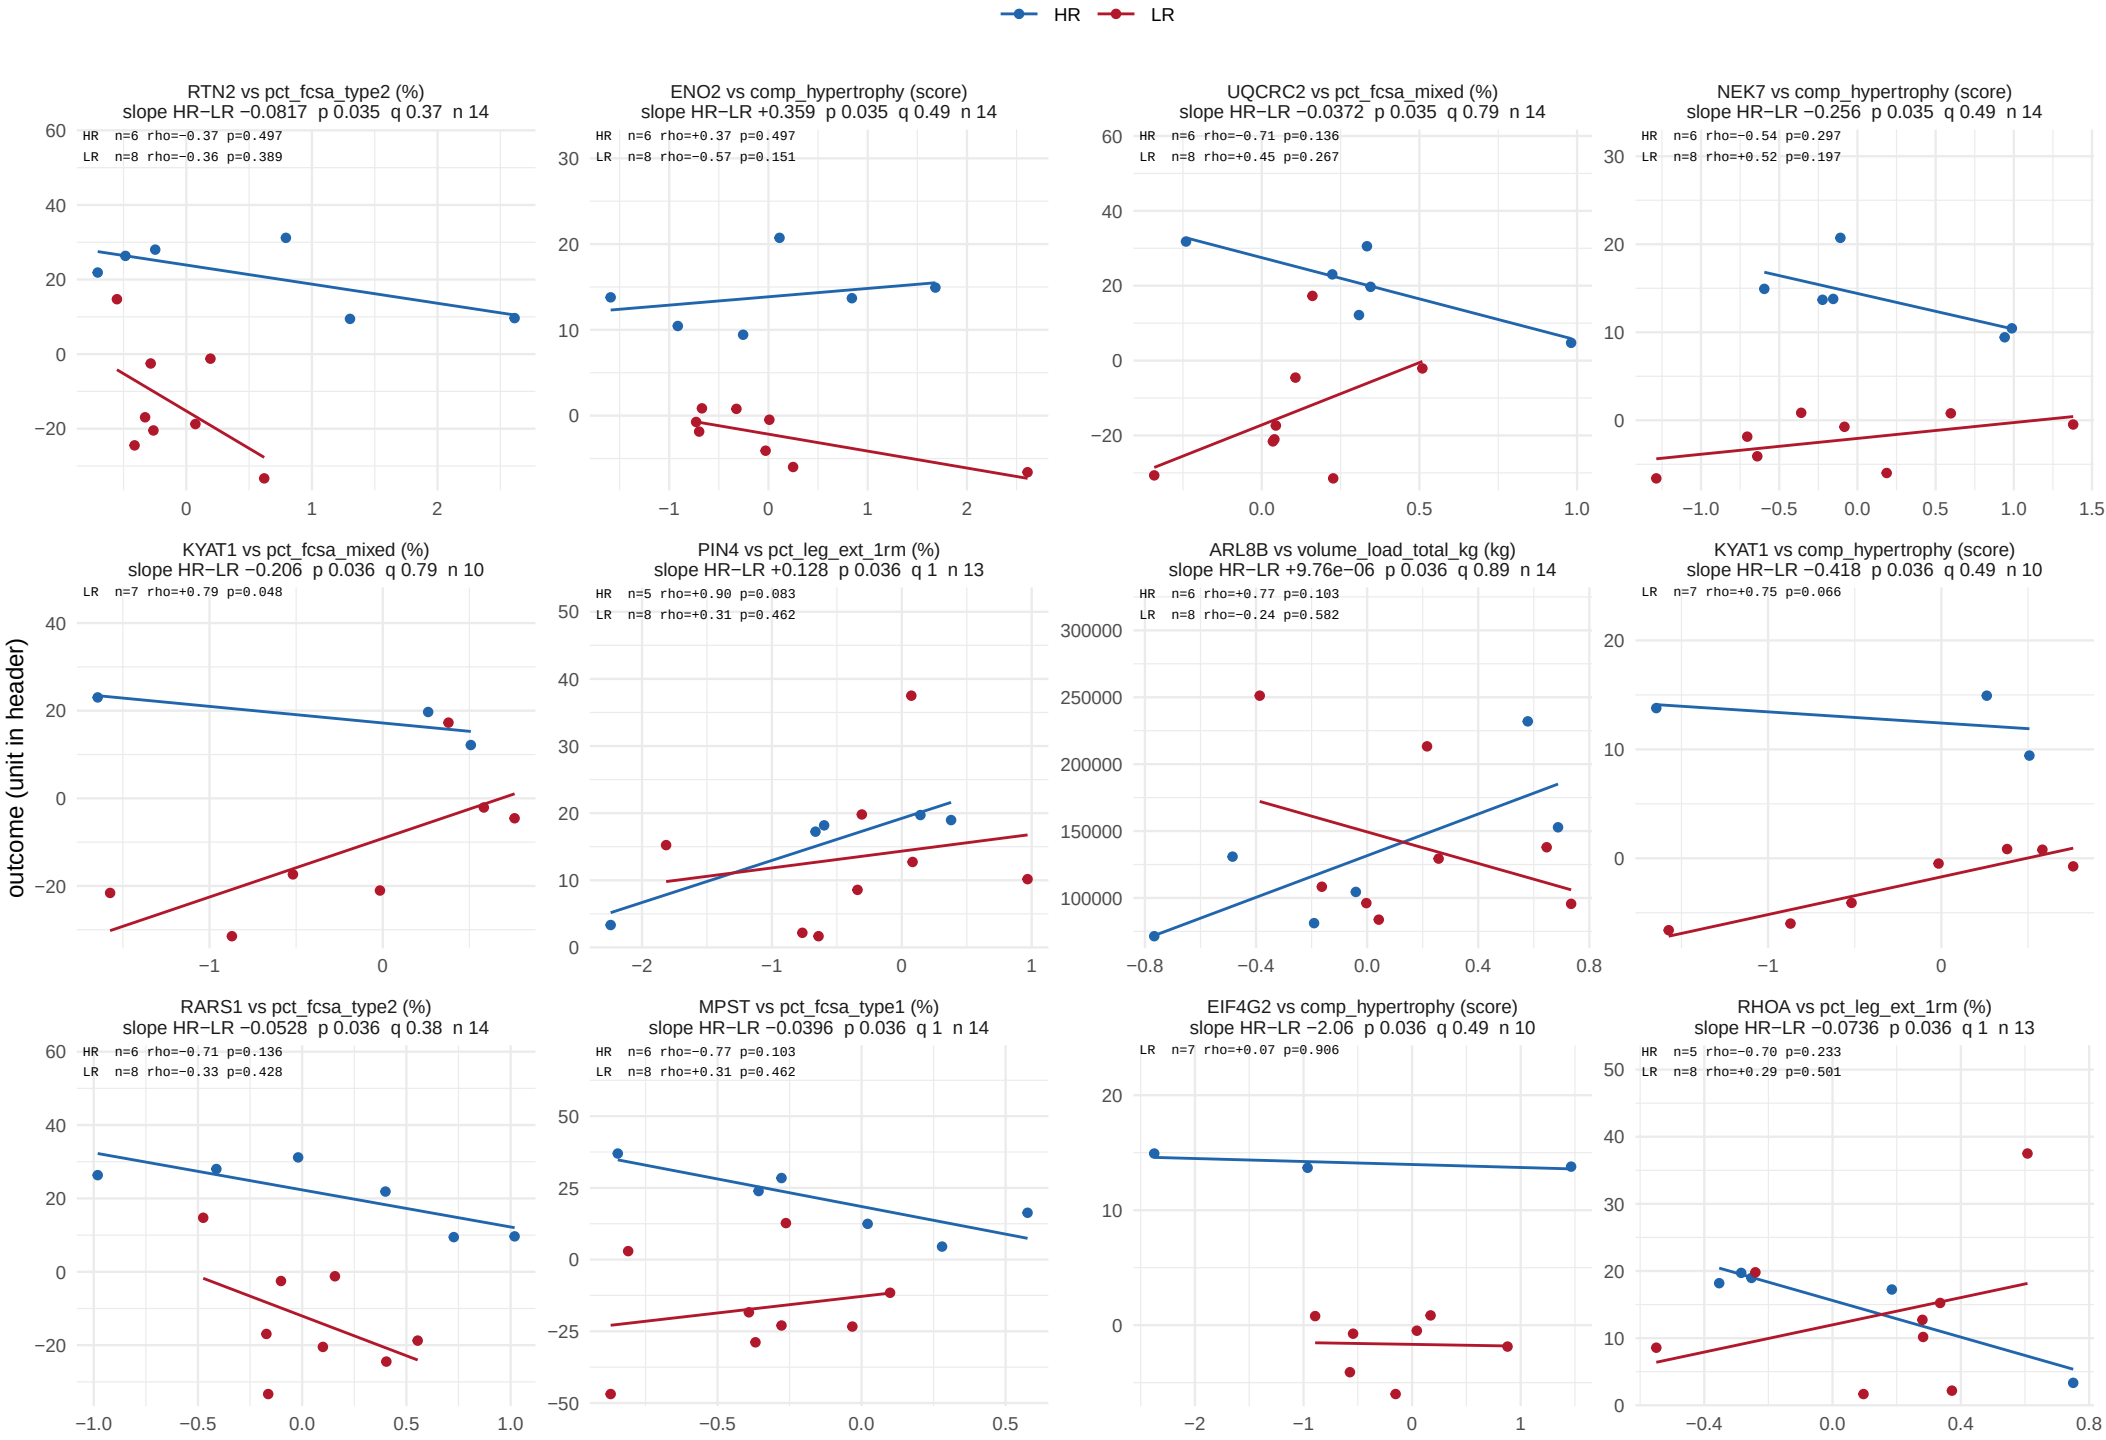

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


735 of 11282 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 49 of 62.

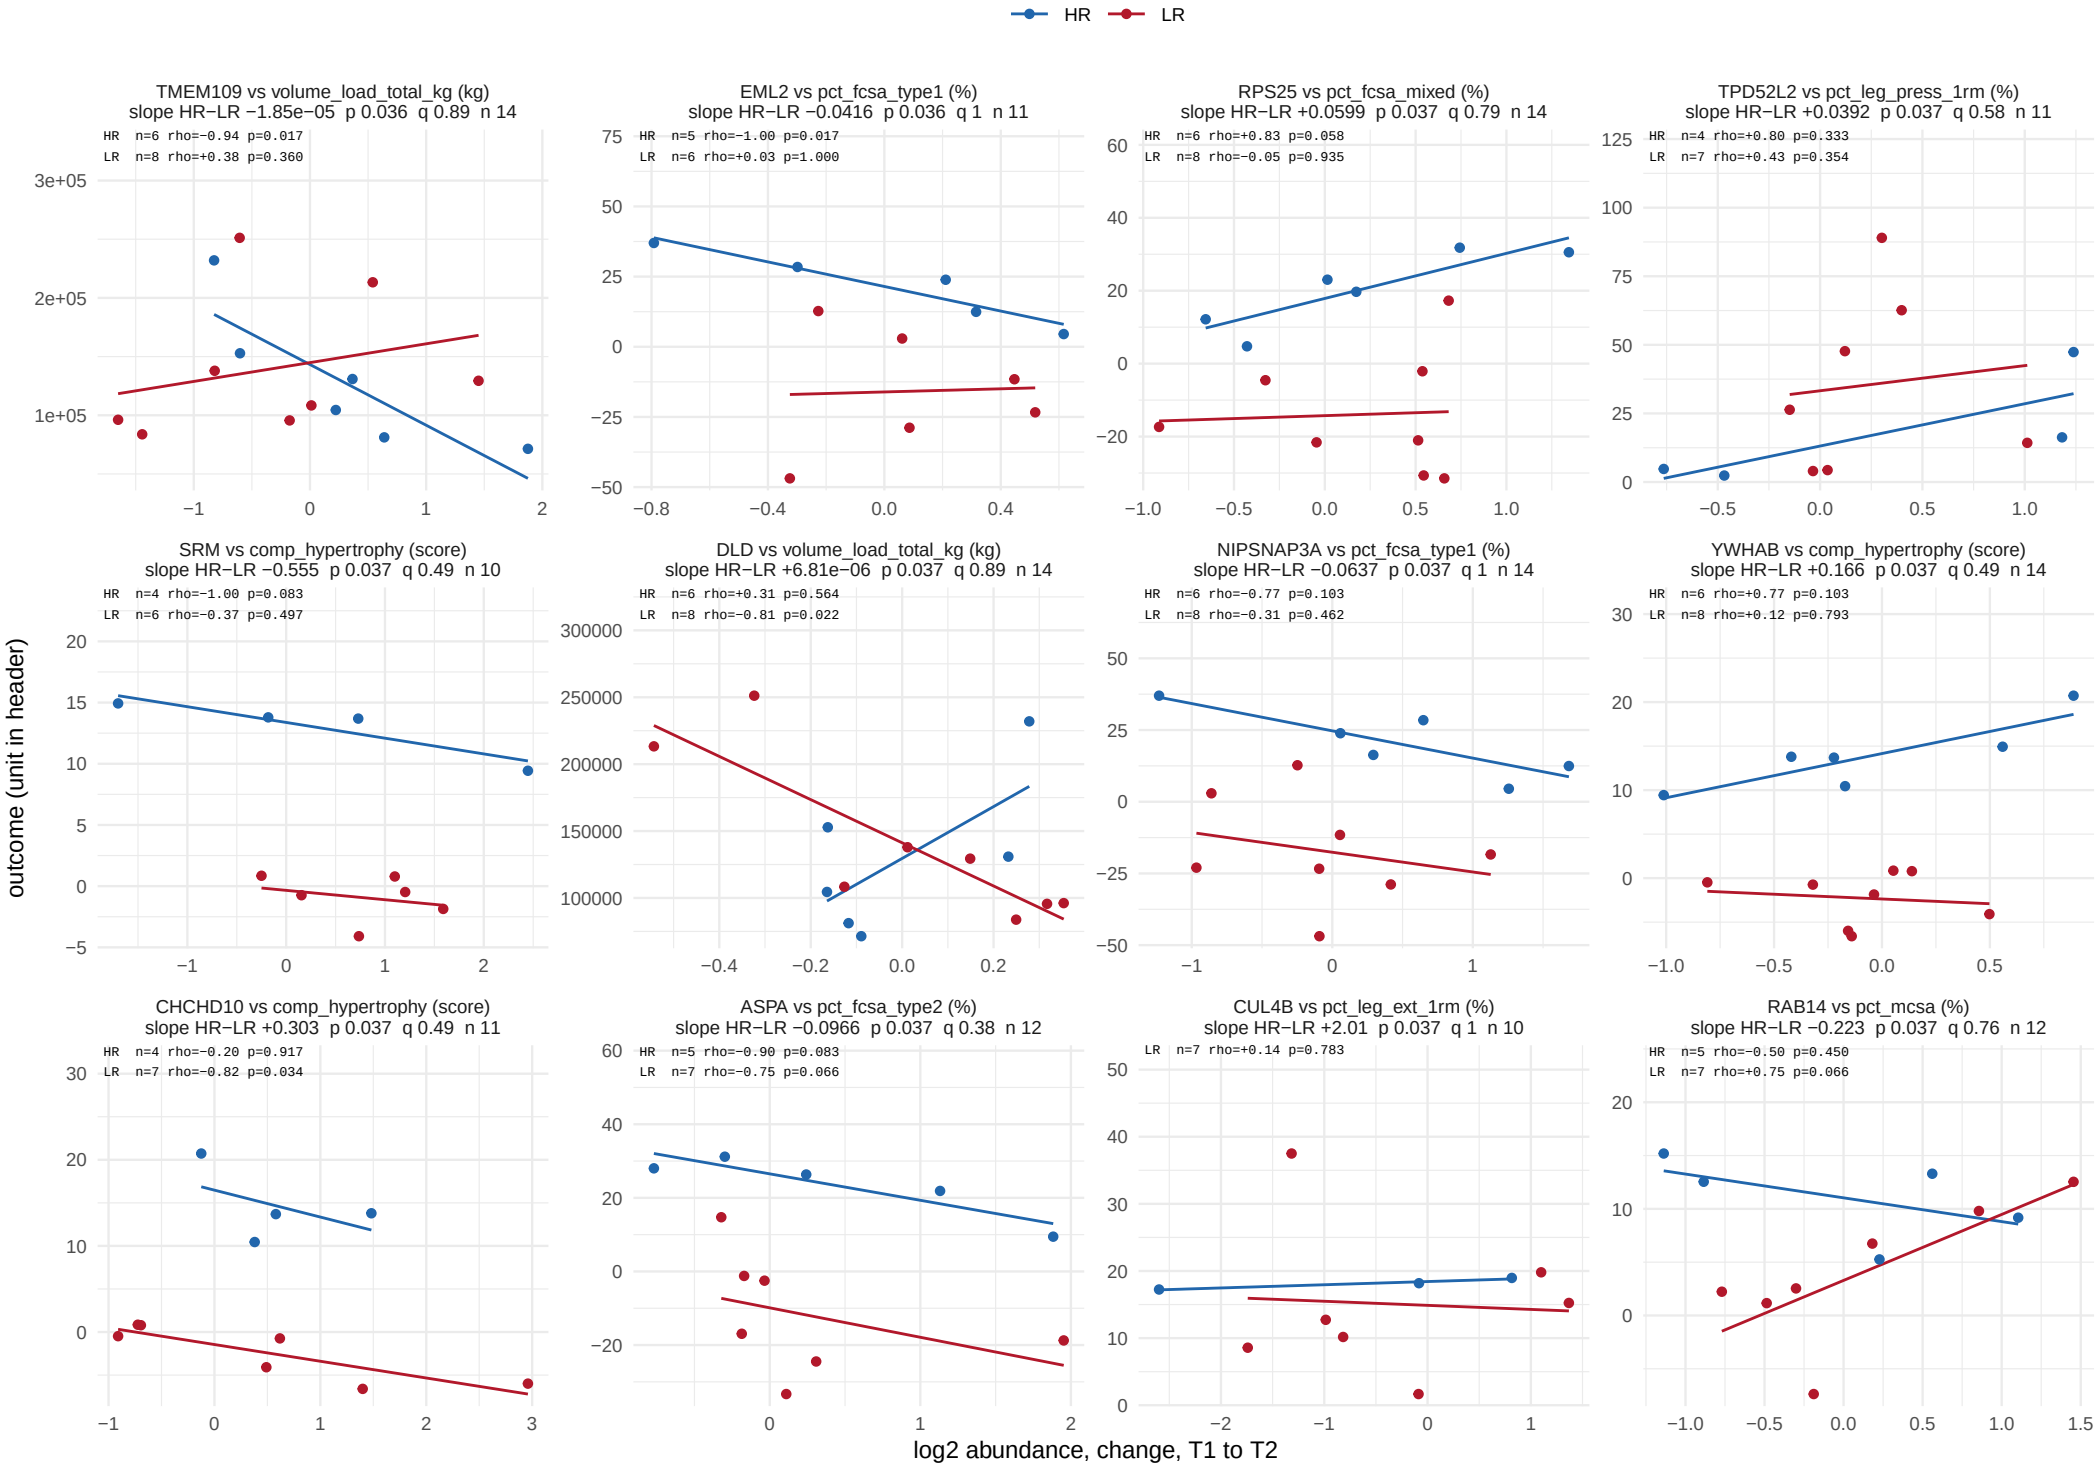

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


735 of 11282 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 50 of 62.

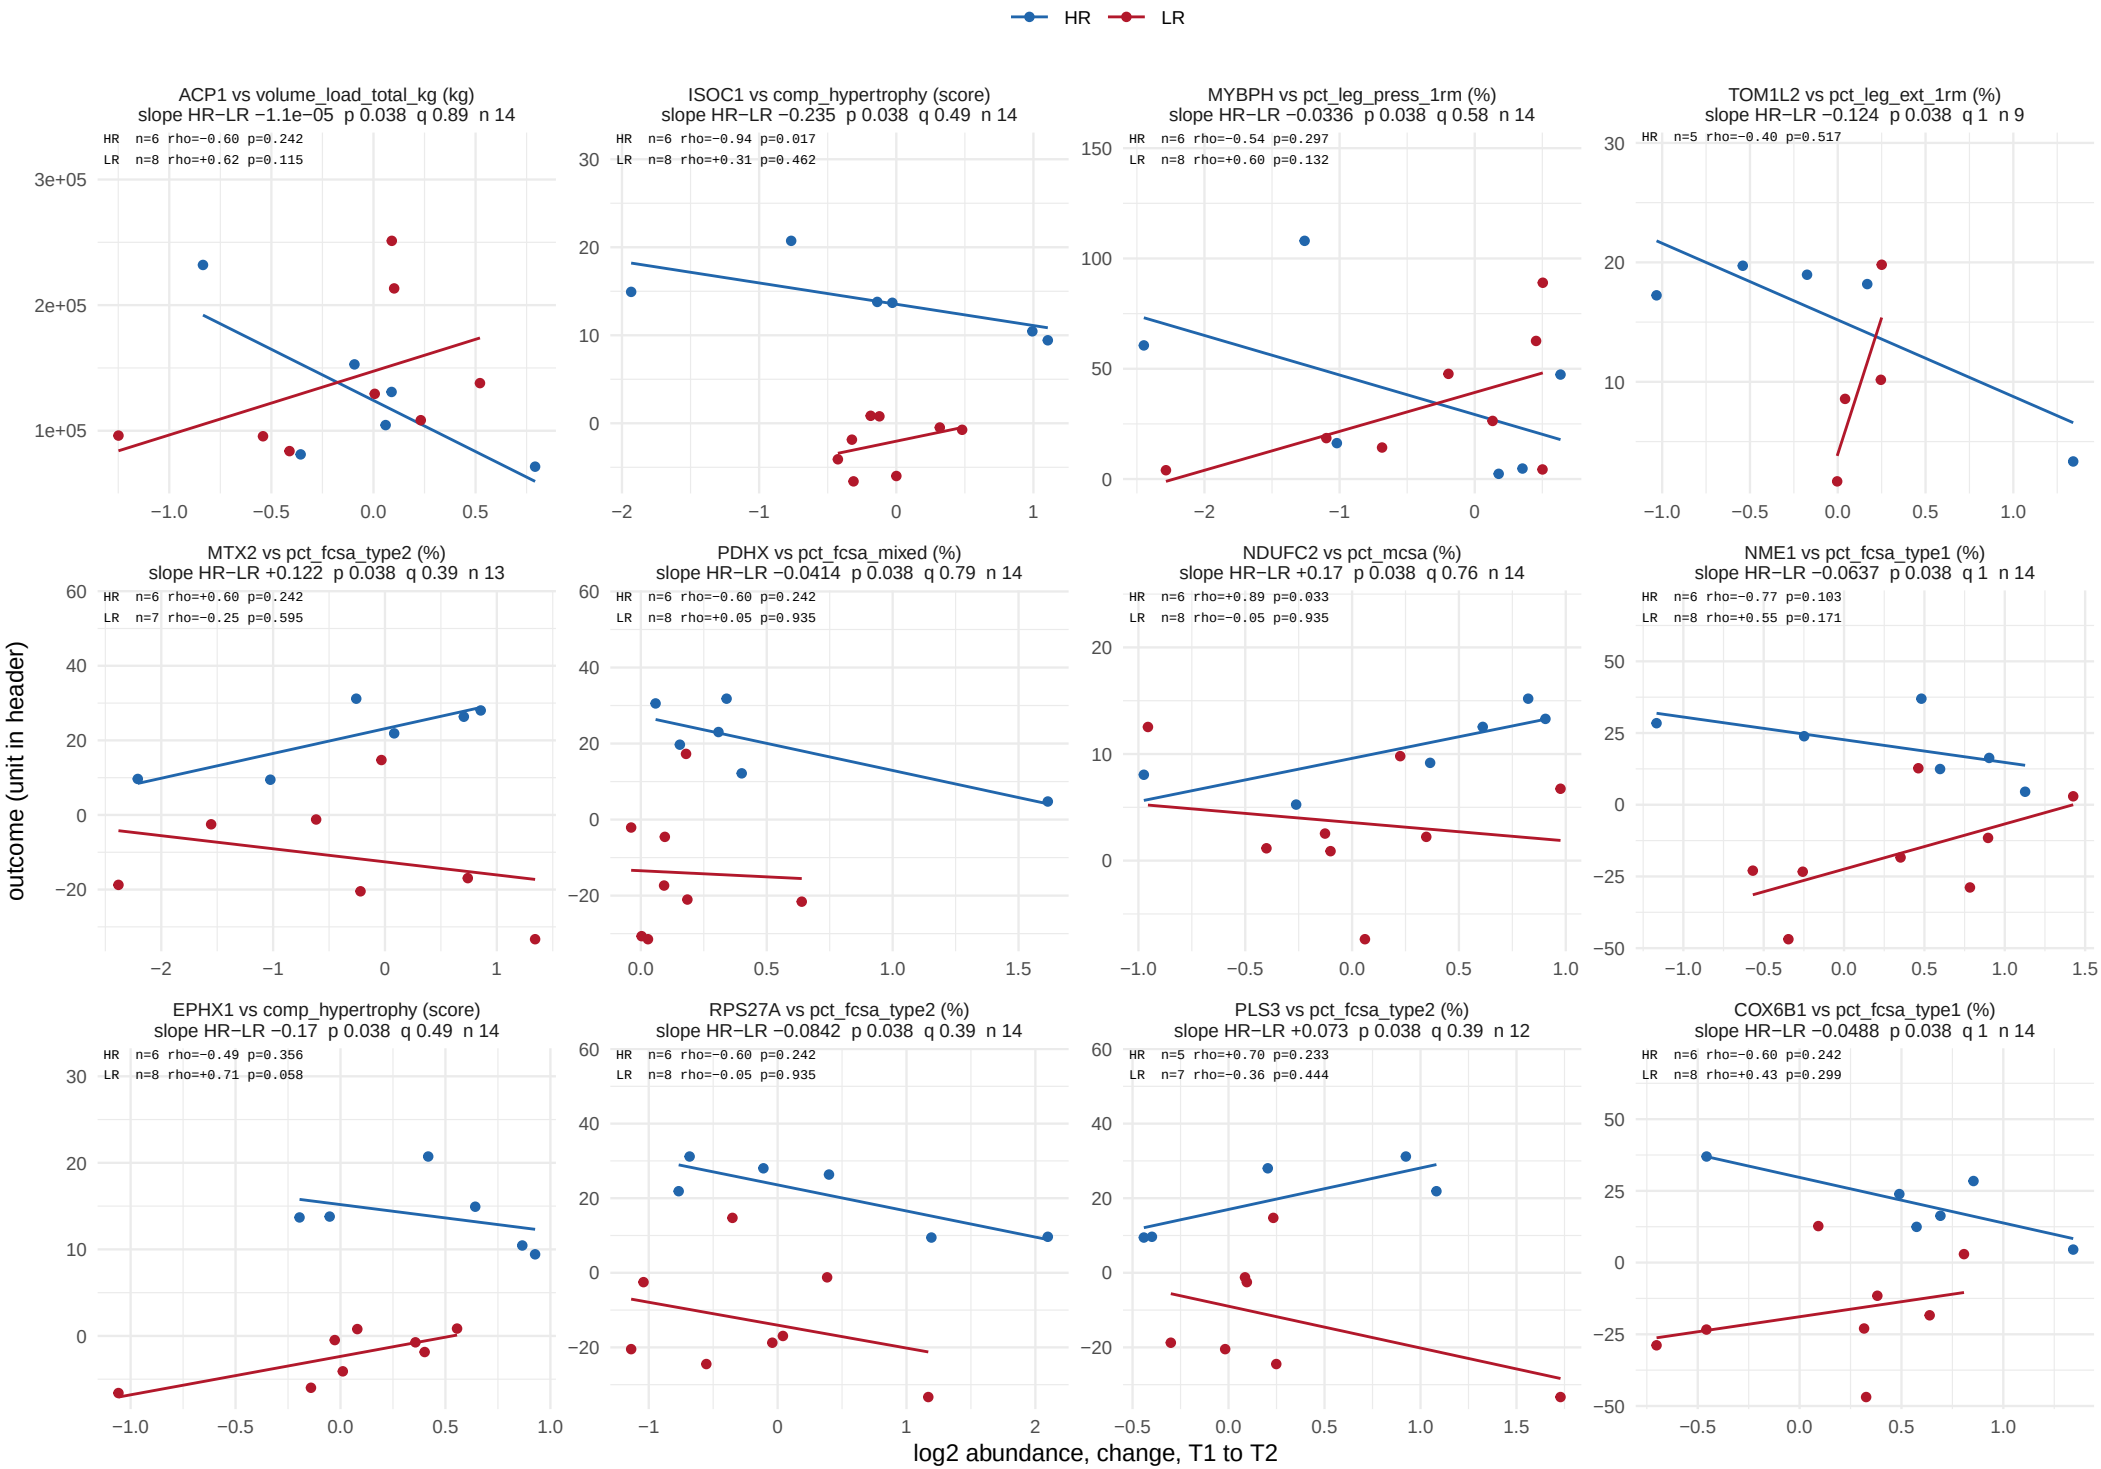

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


735 of 11282 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 51 of 62.

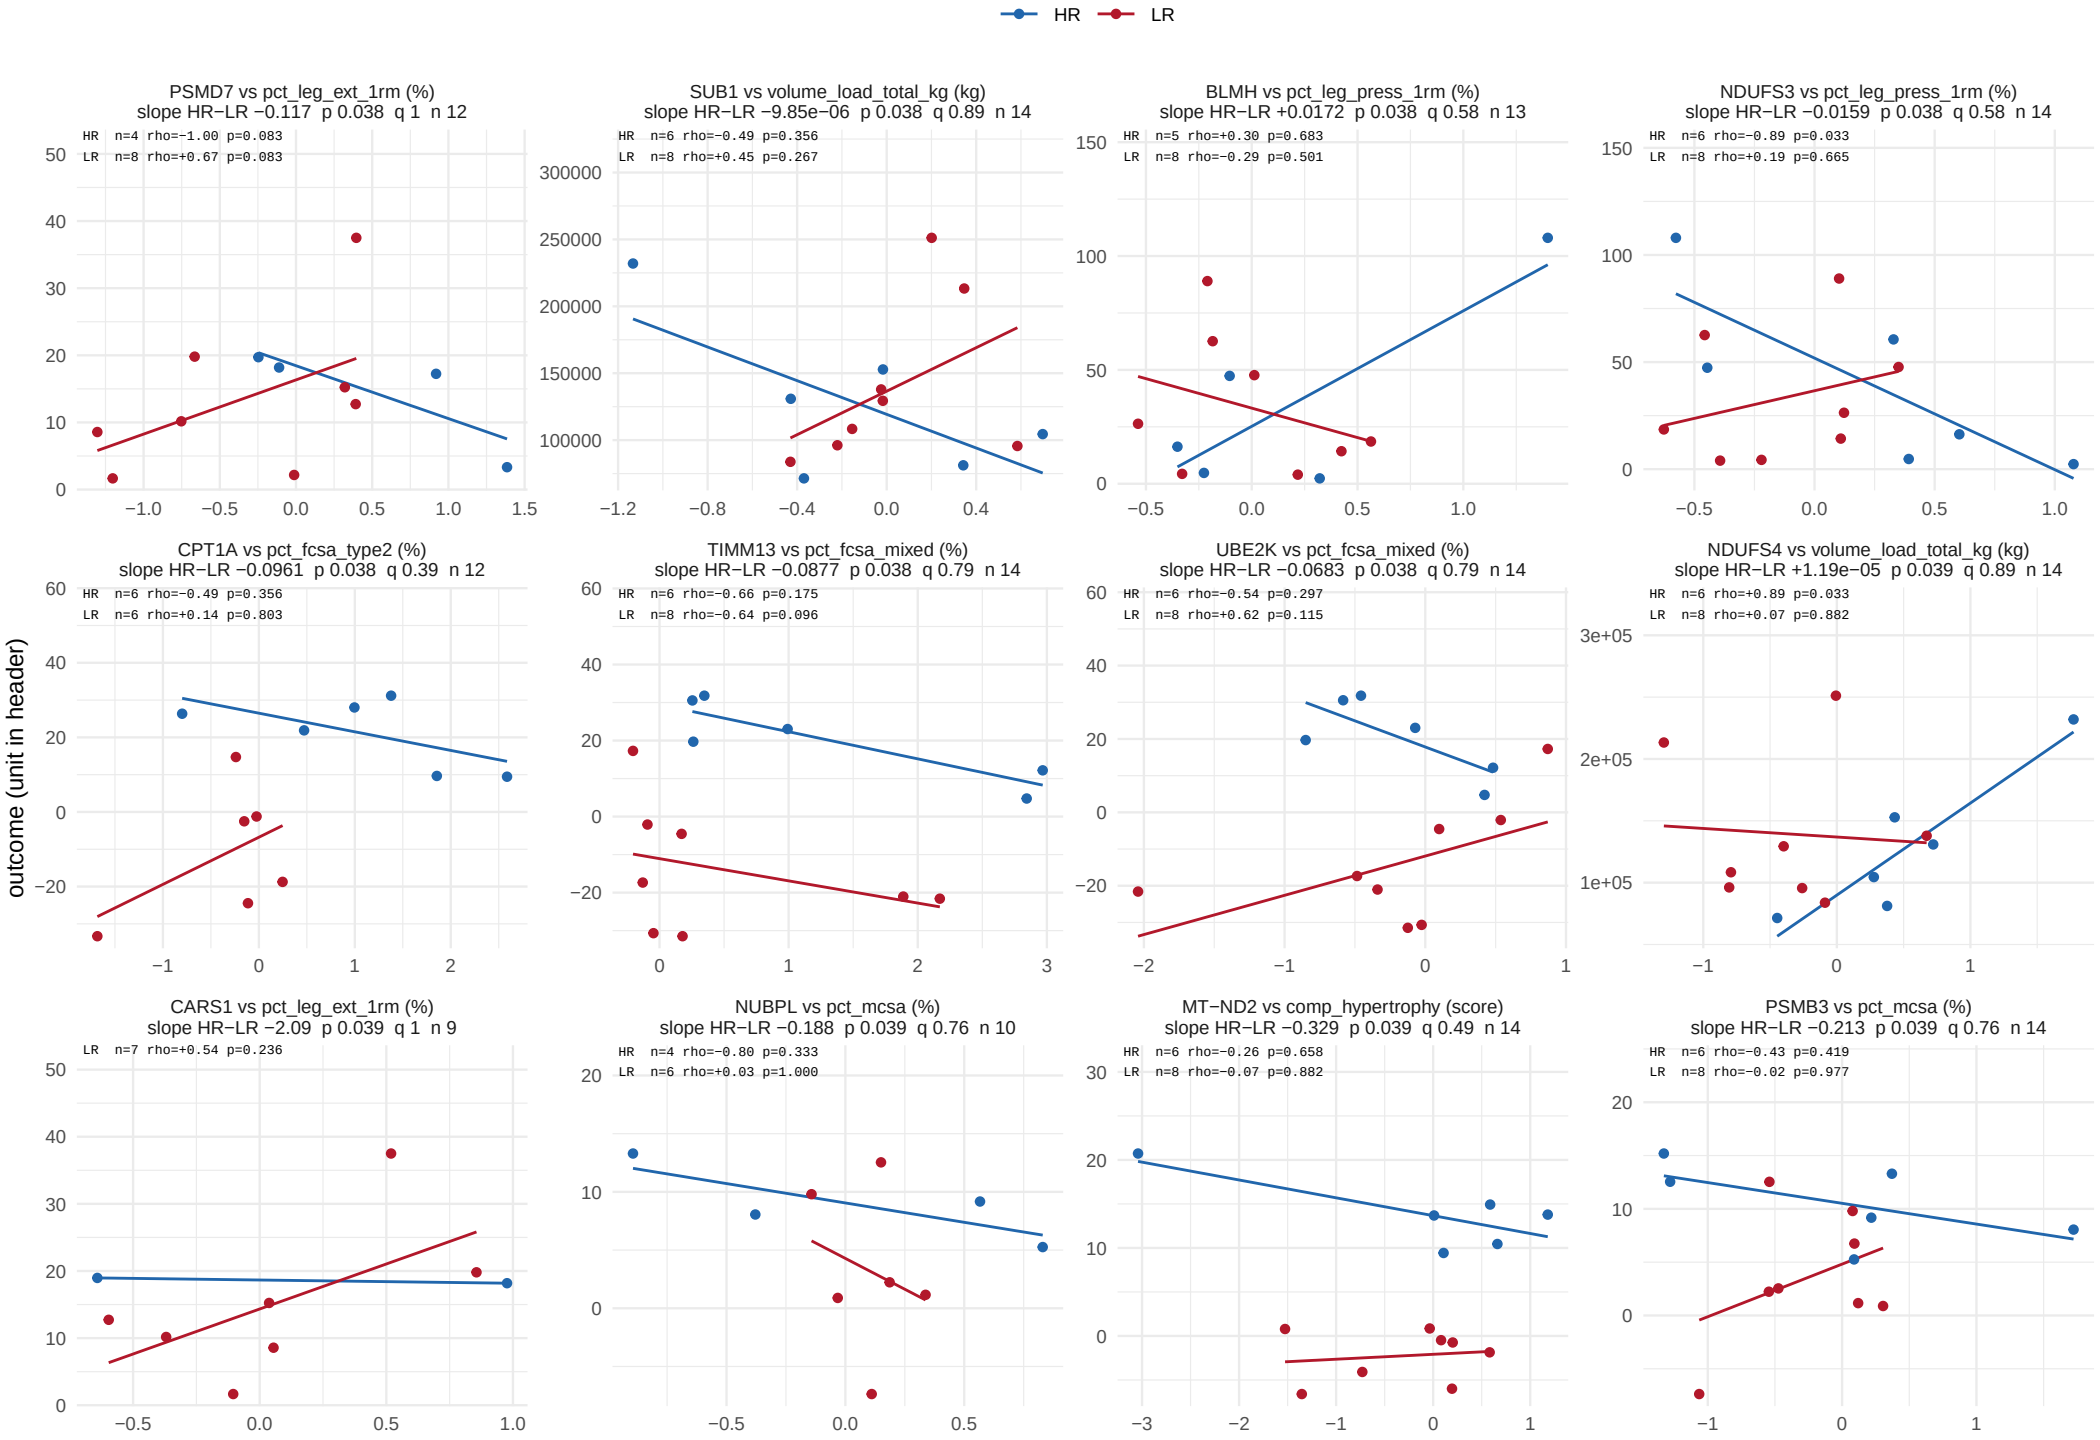

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


735 of 11282 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 52 of 62.

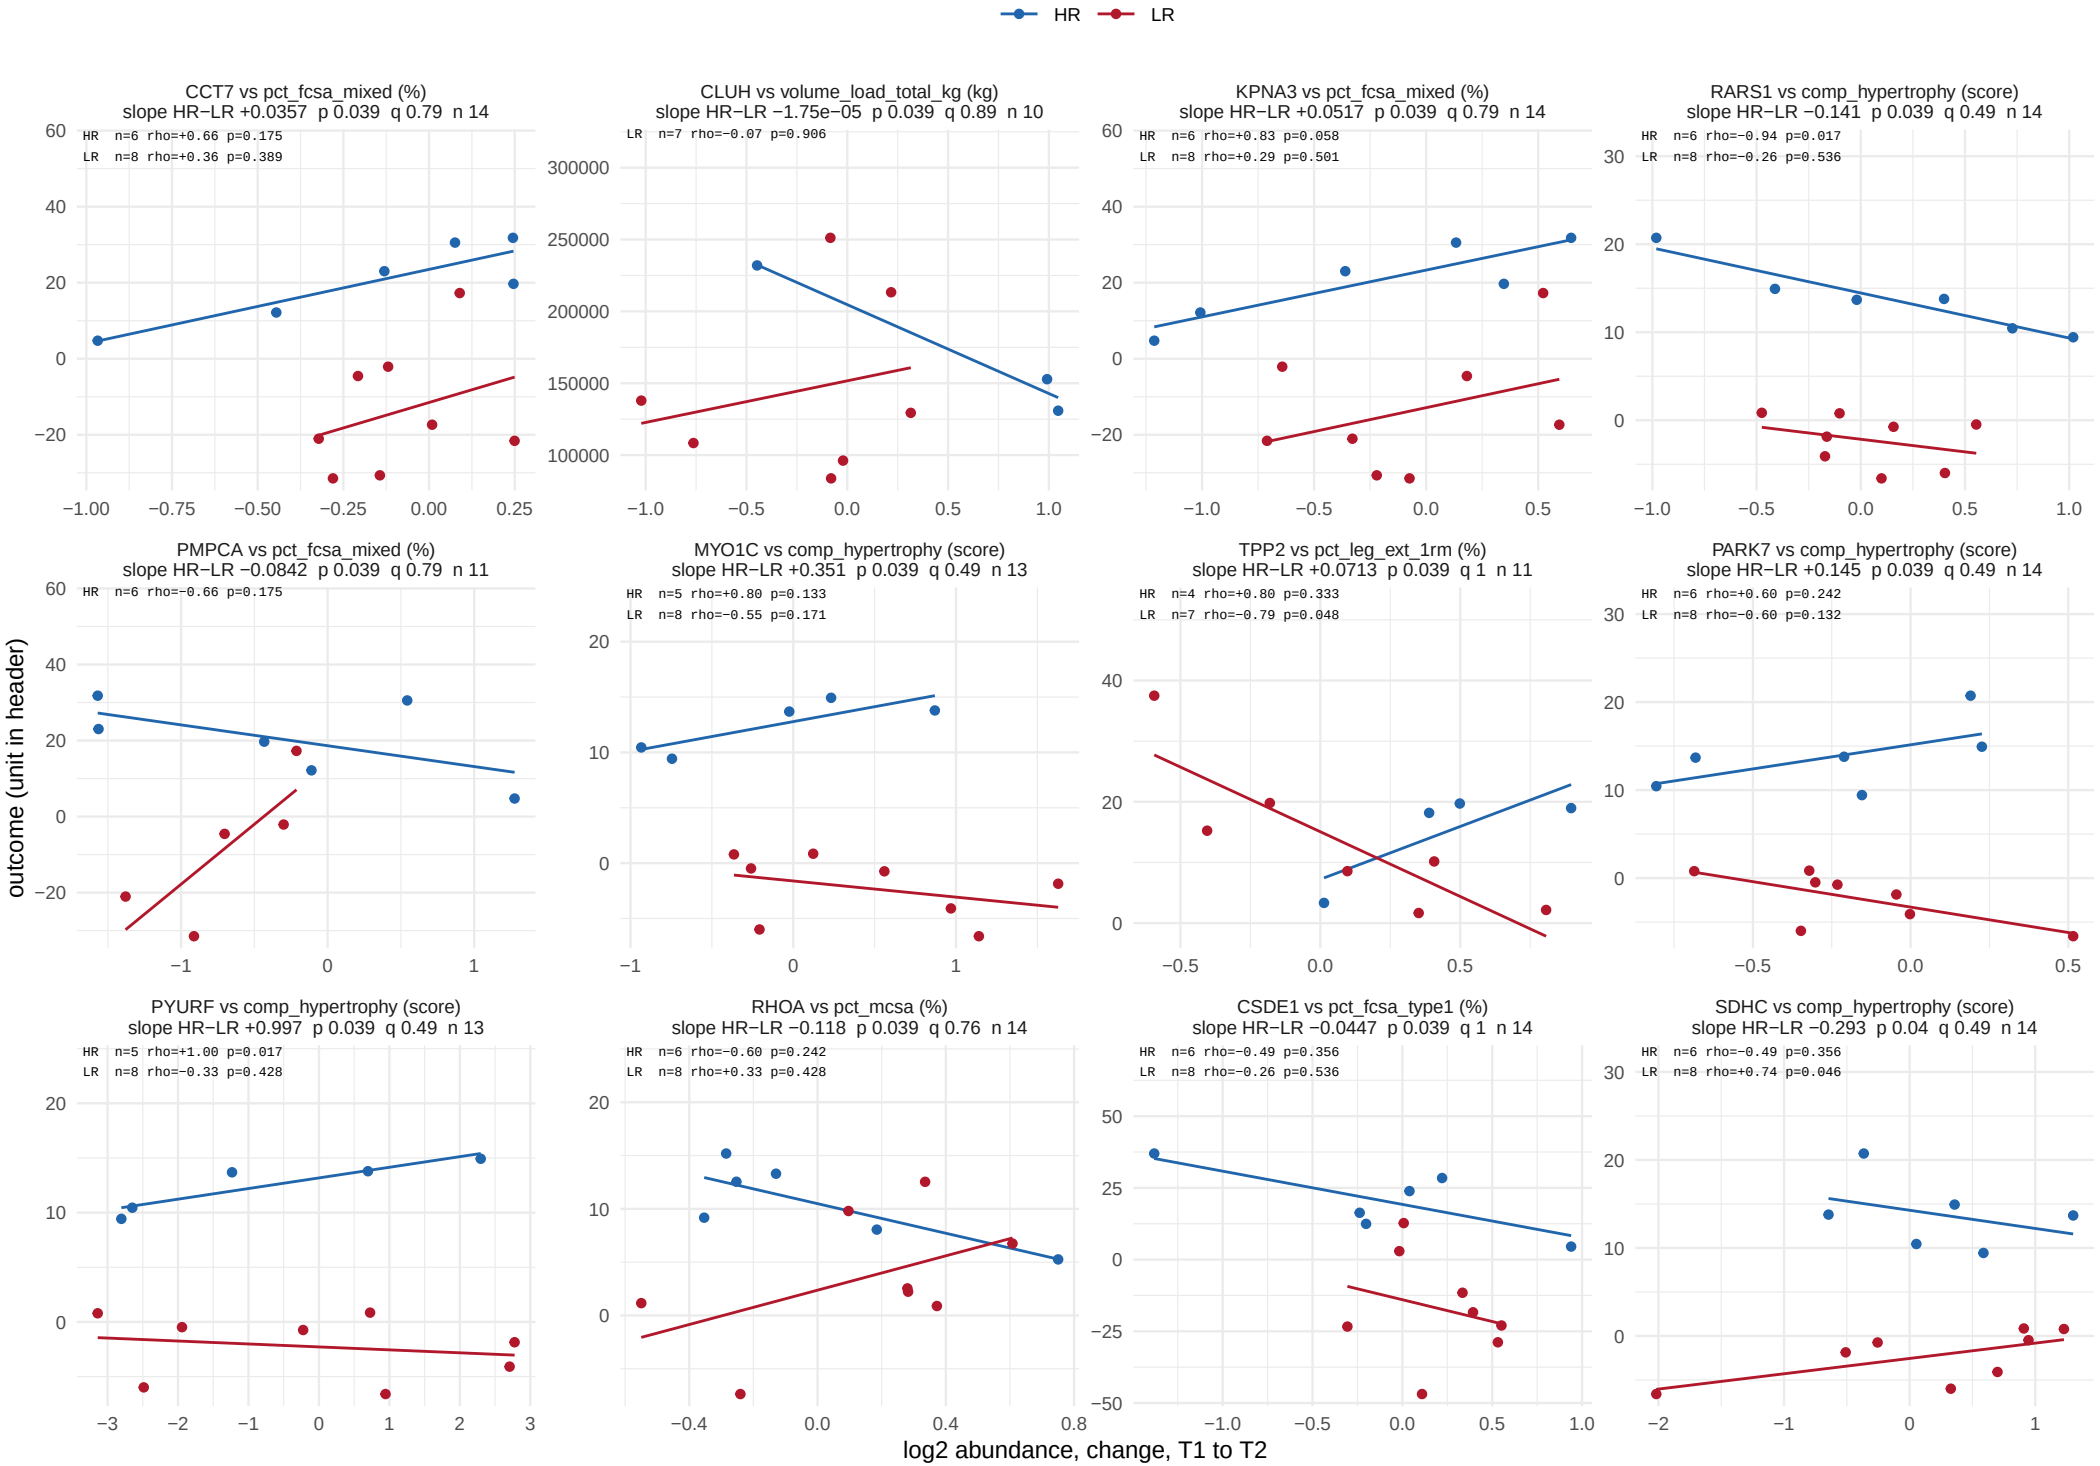

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


735 of 11282 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 53 of 62.

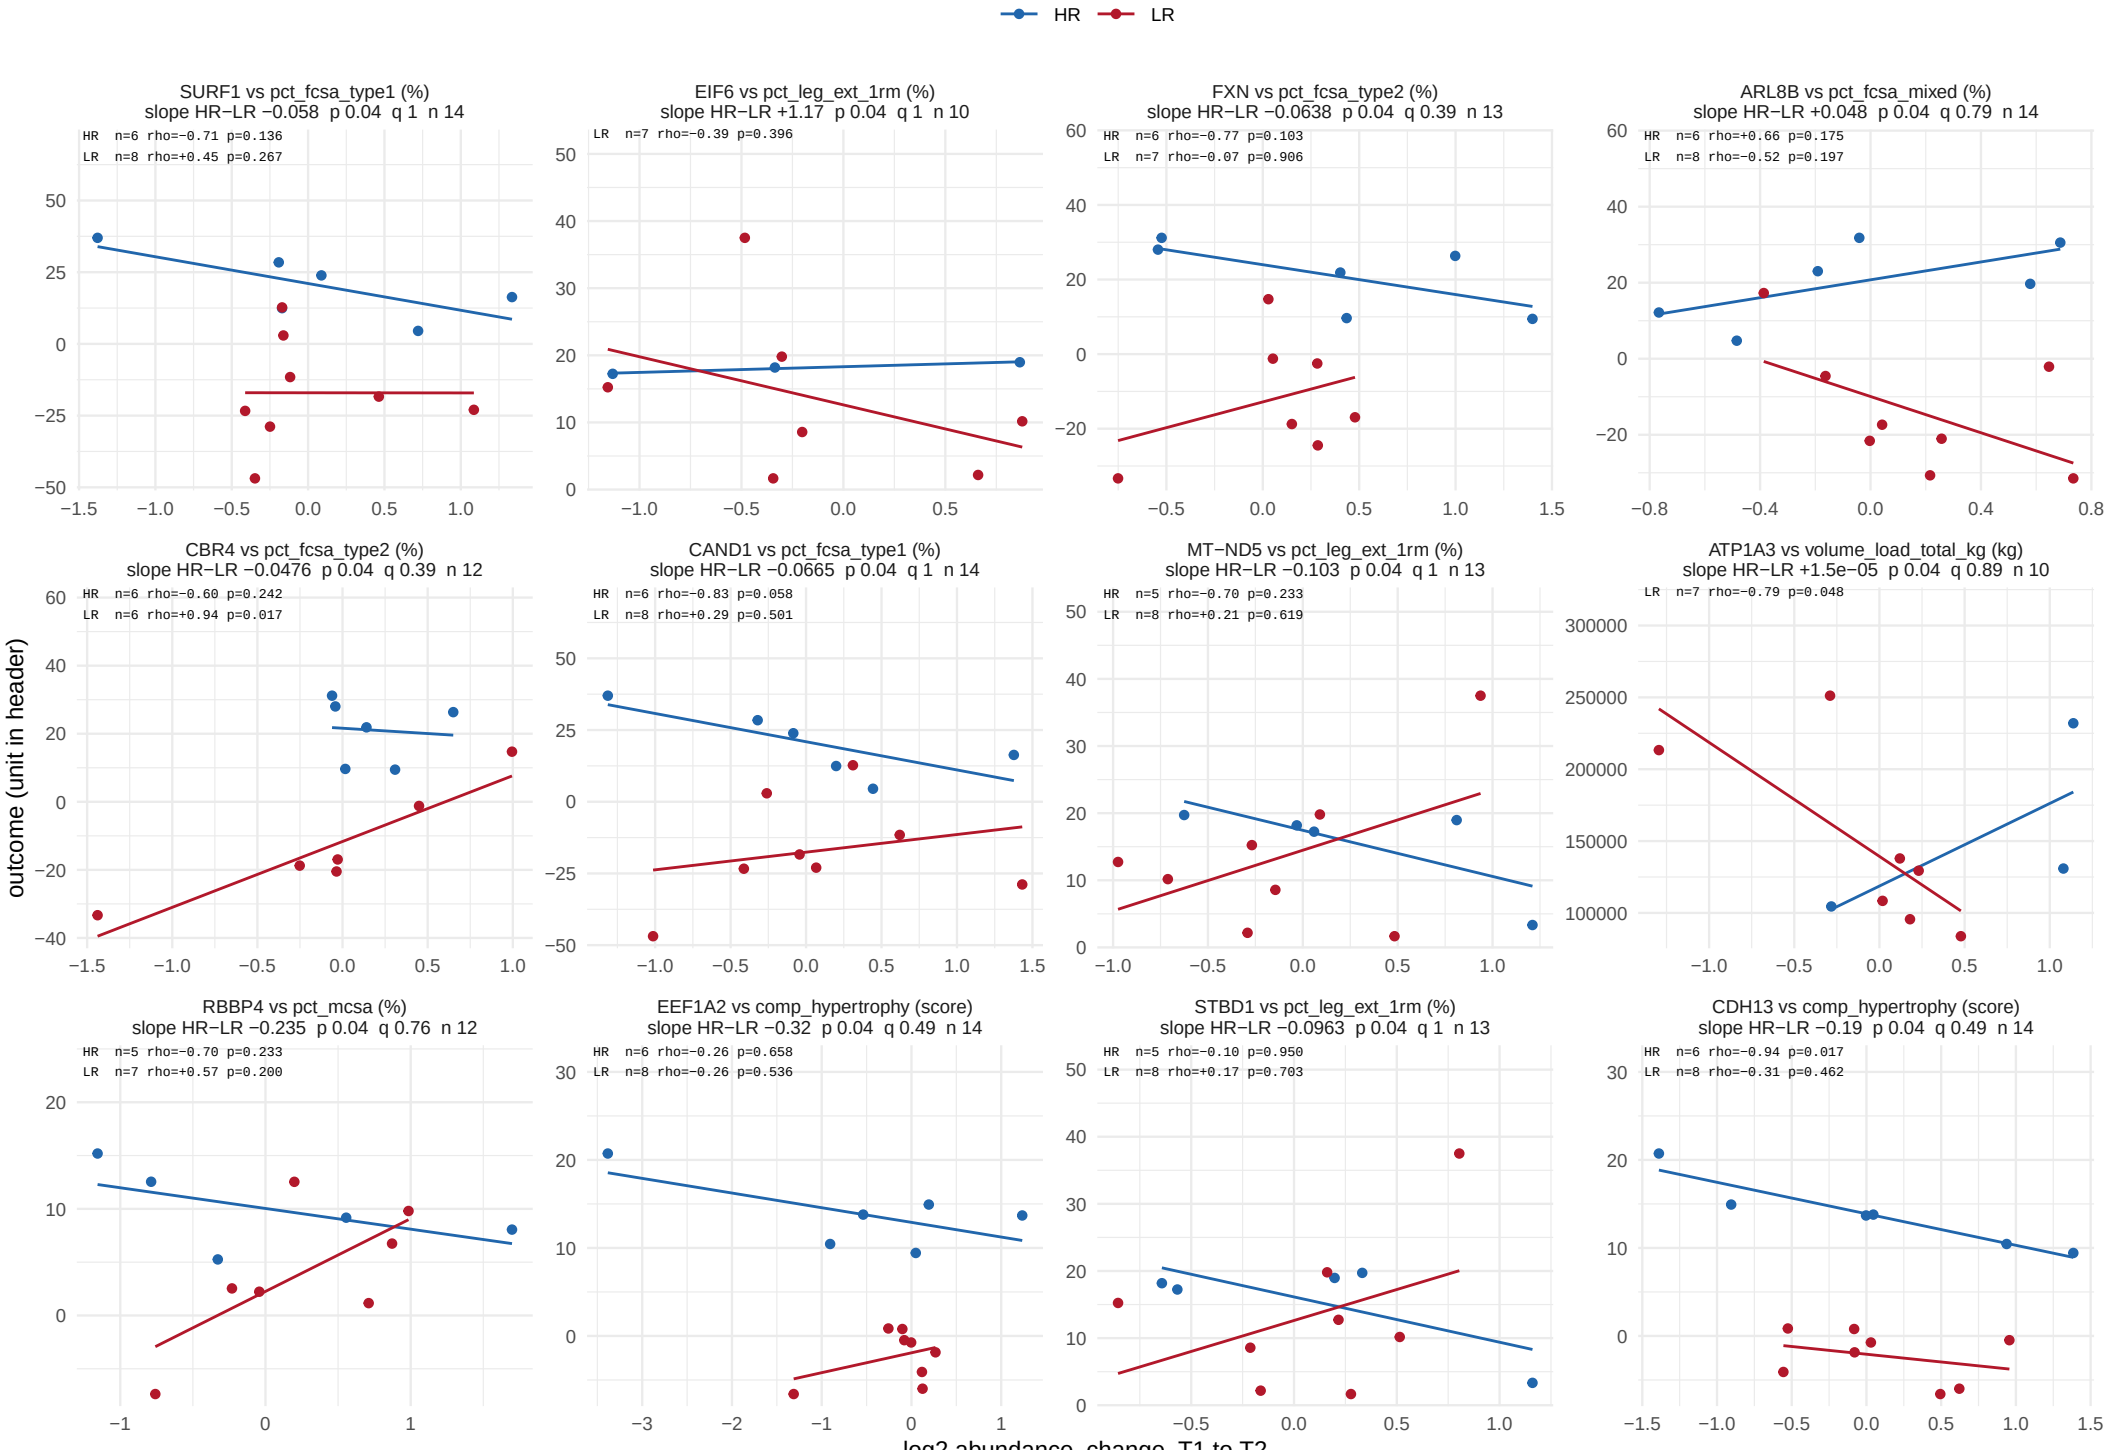

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


735 of 11282 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 54 of 62.

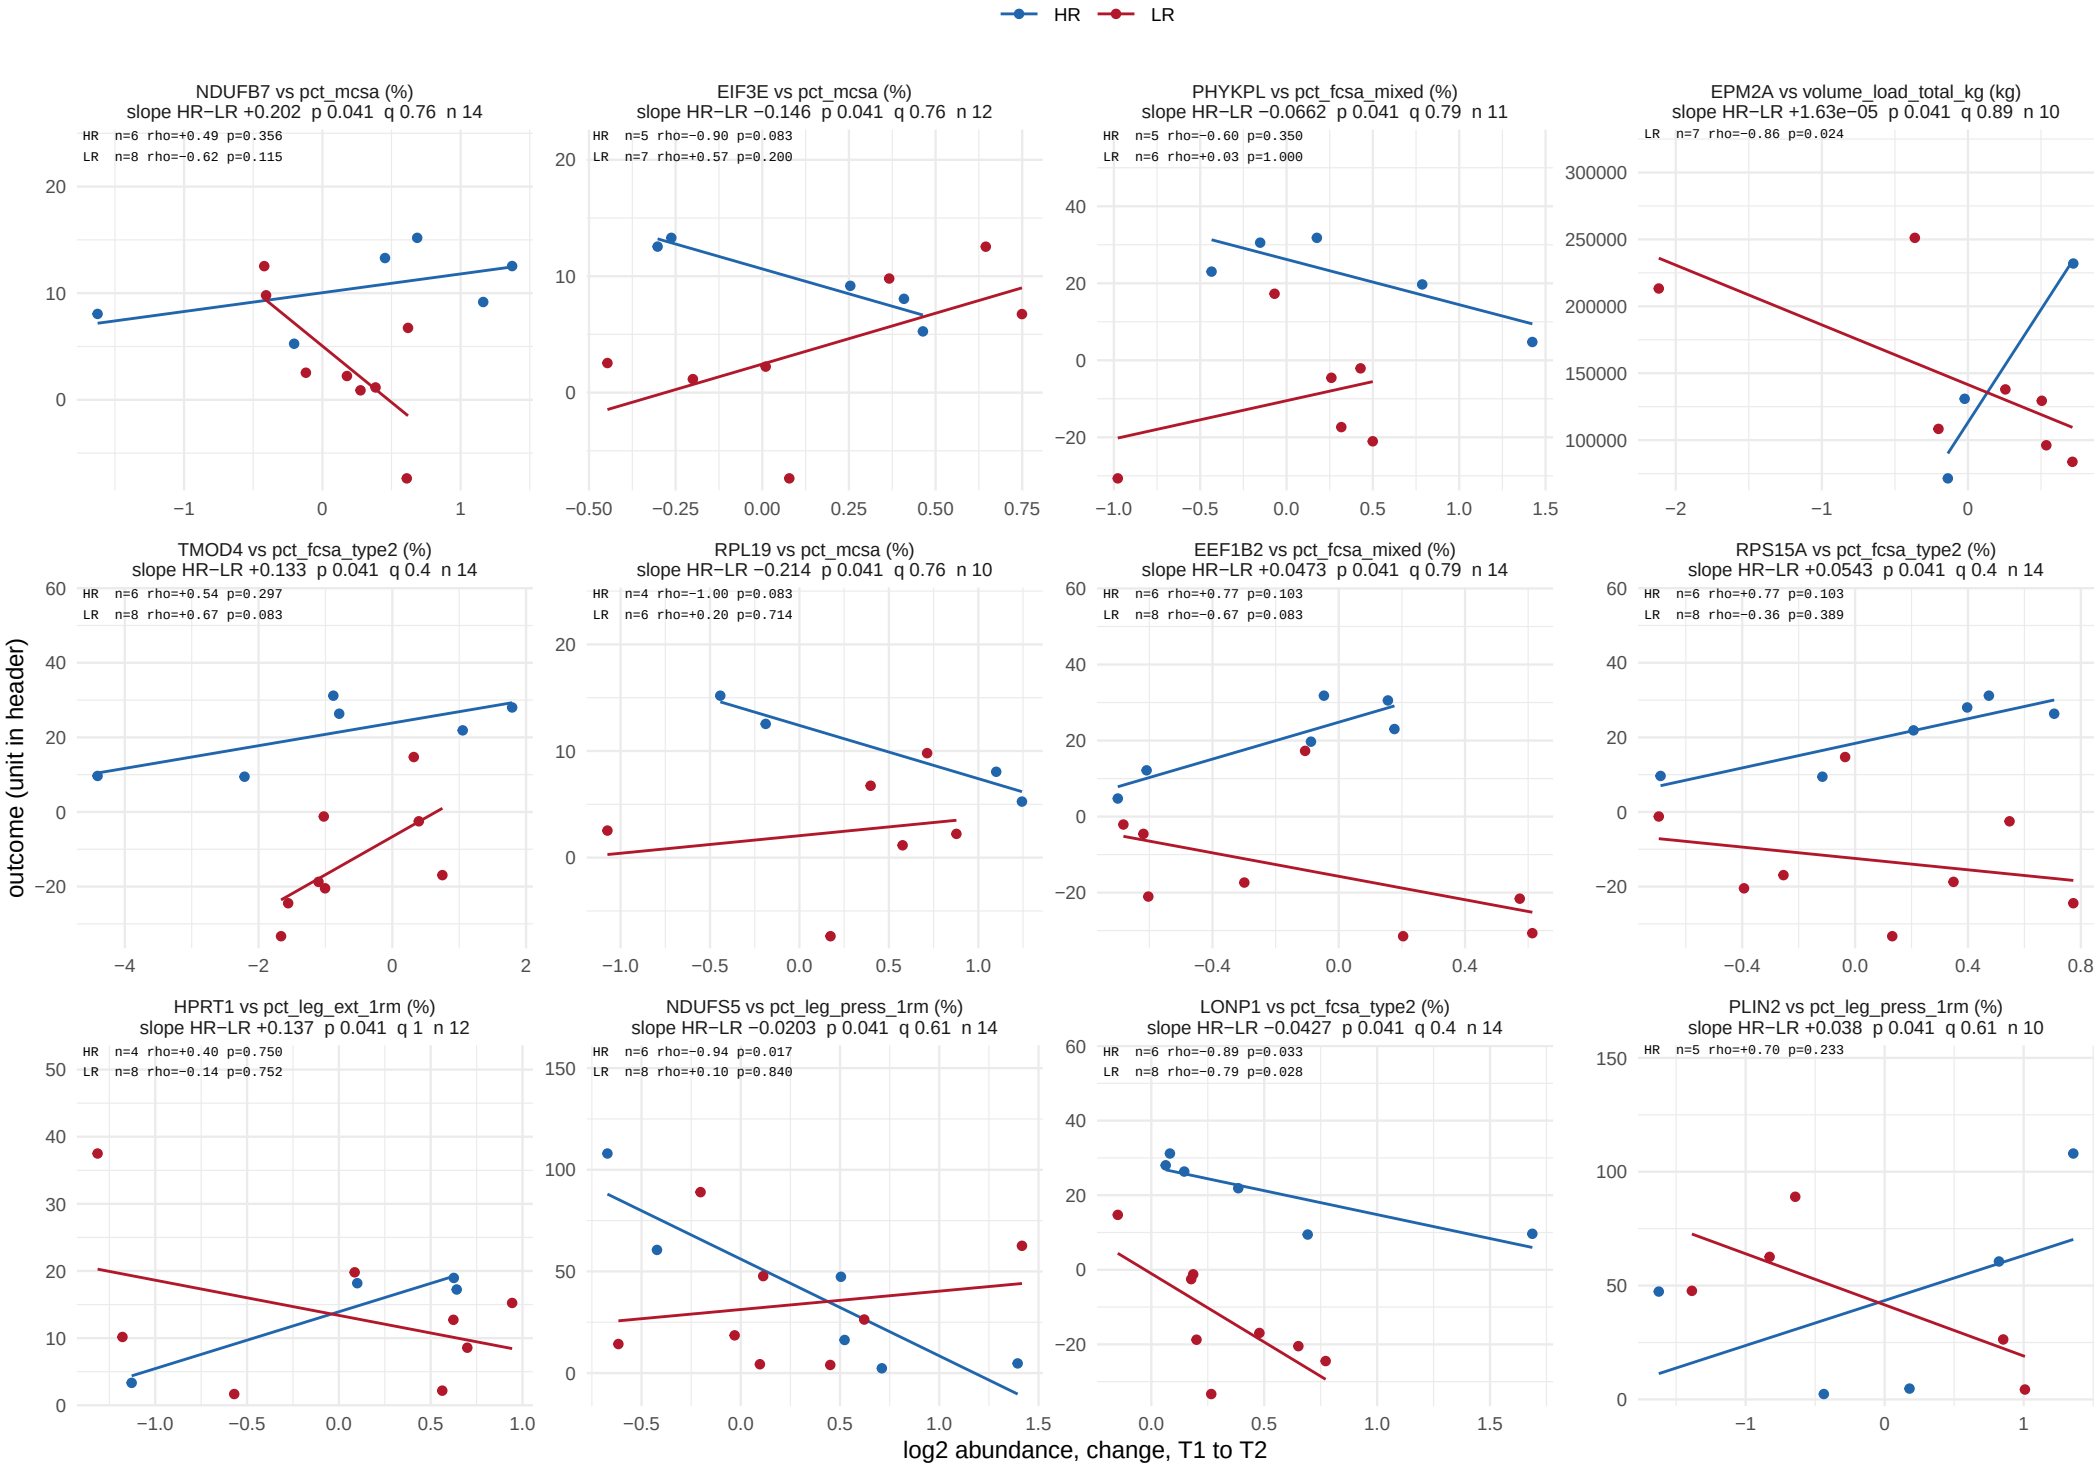

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


735 of 11282 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 55 of 62.

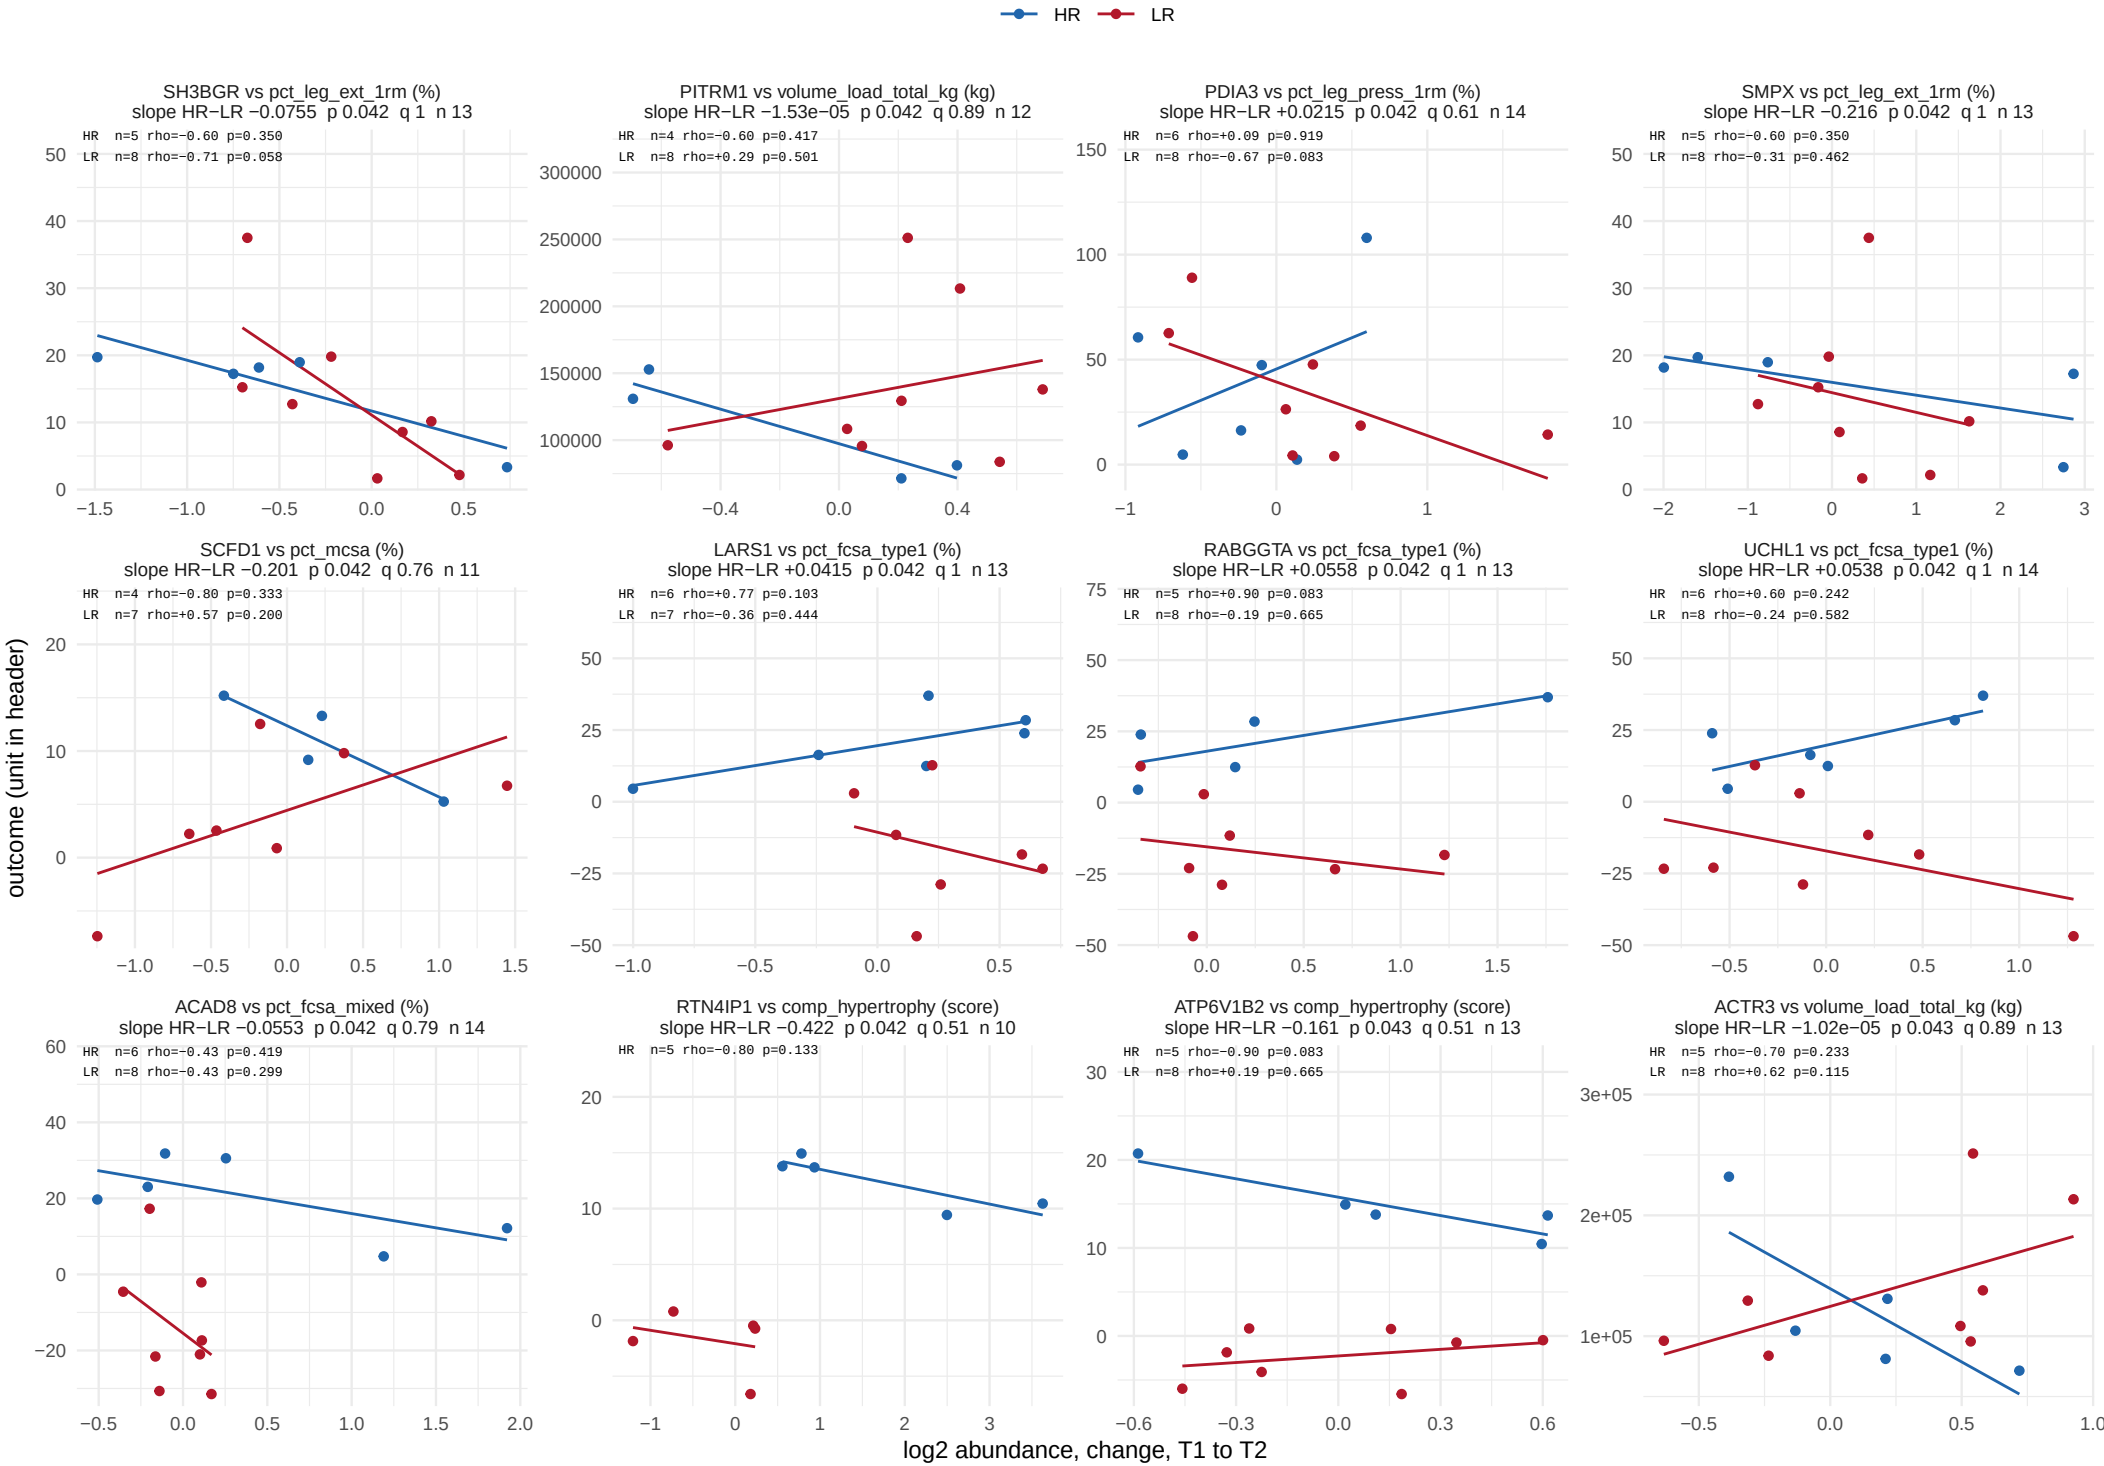

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


735 of 11282 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 56 of 62.

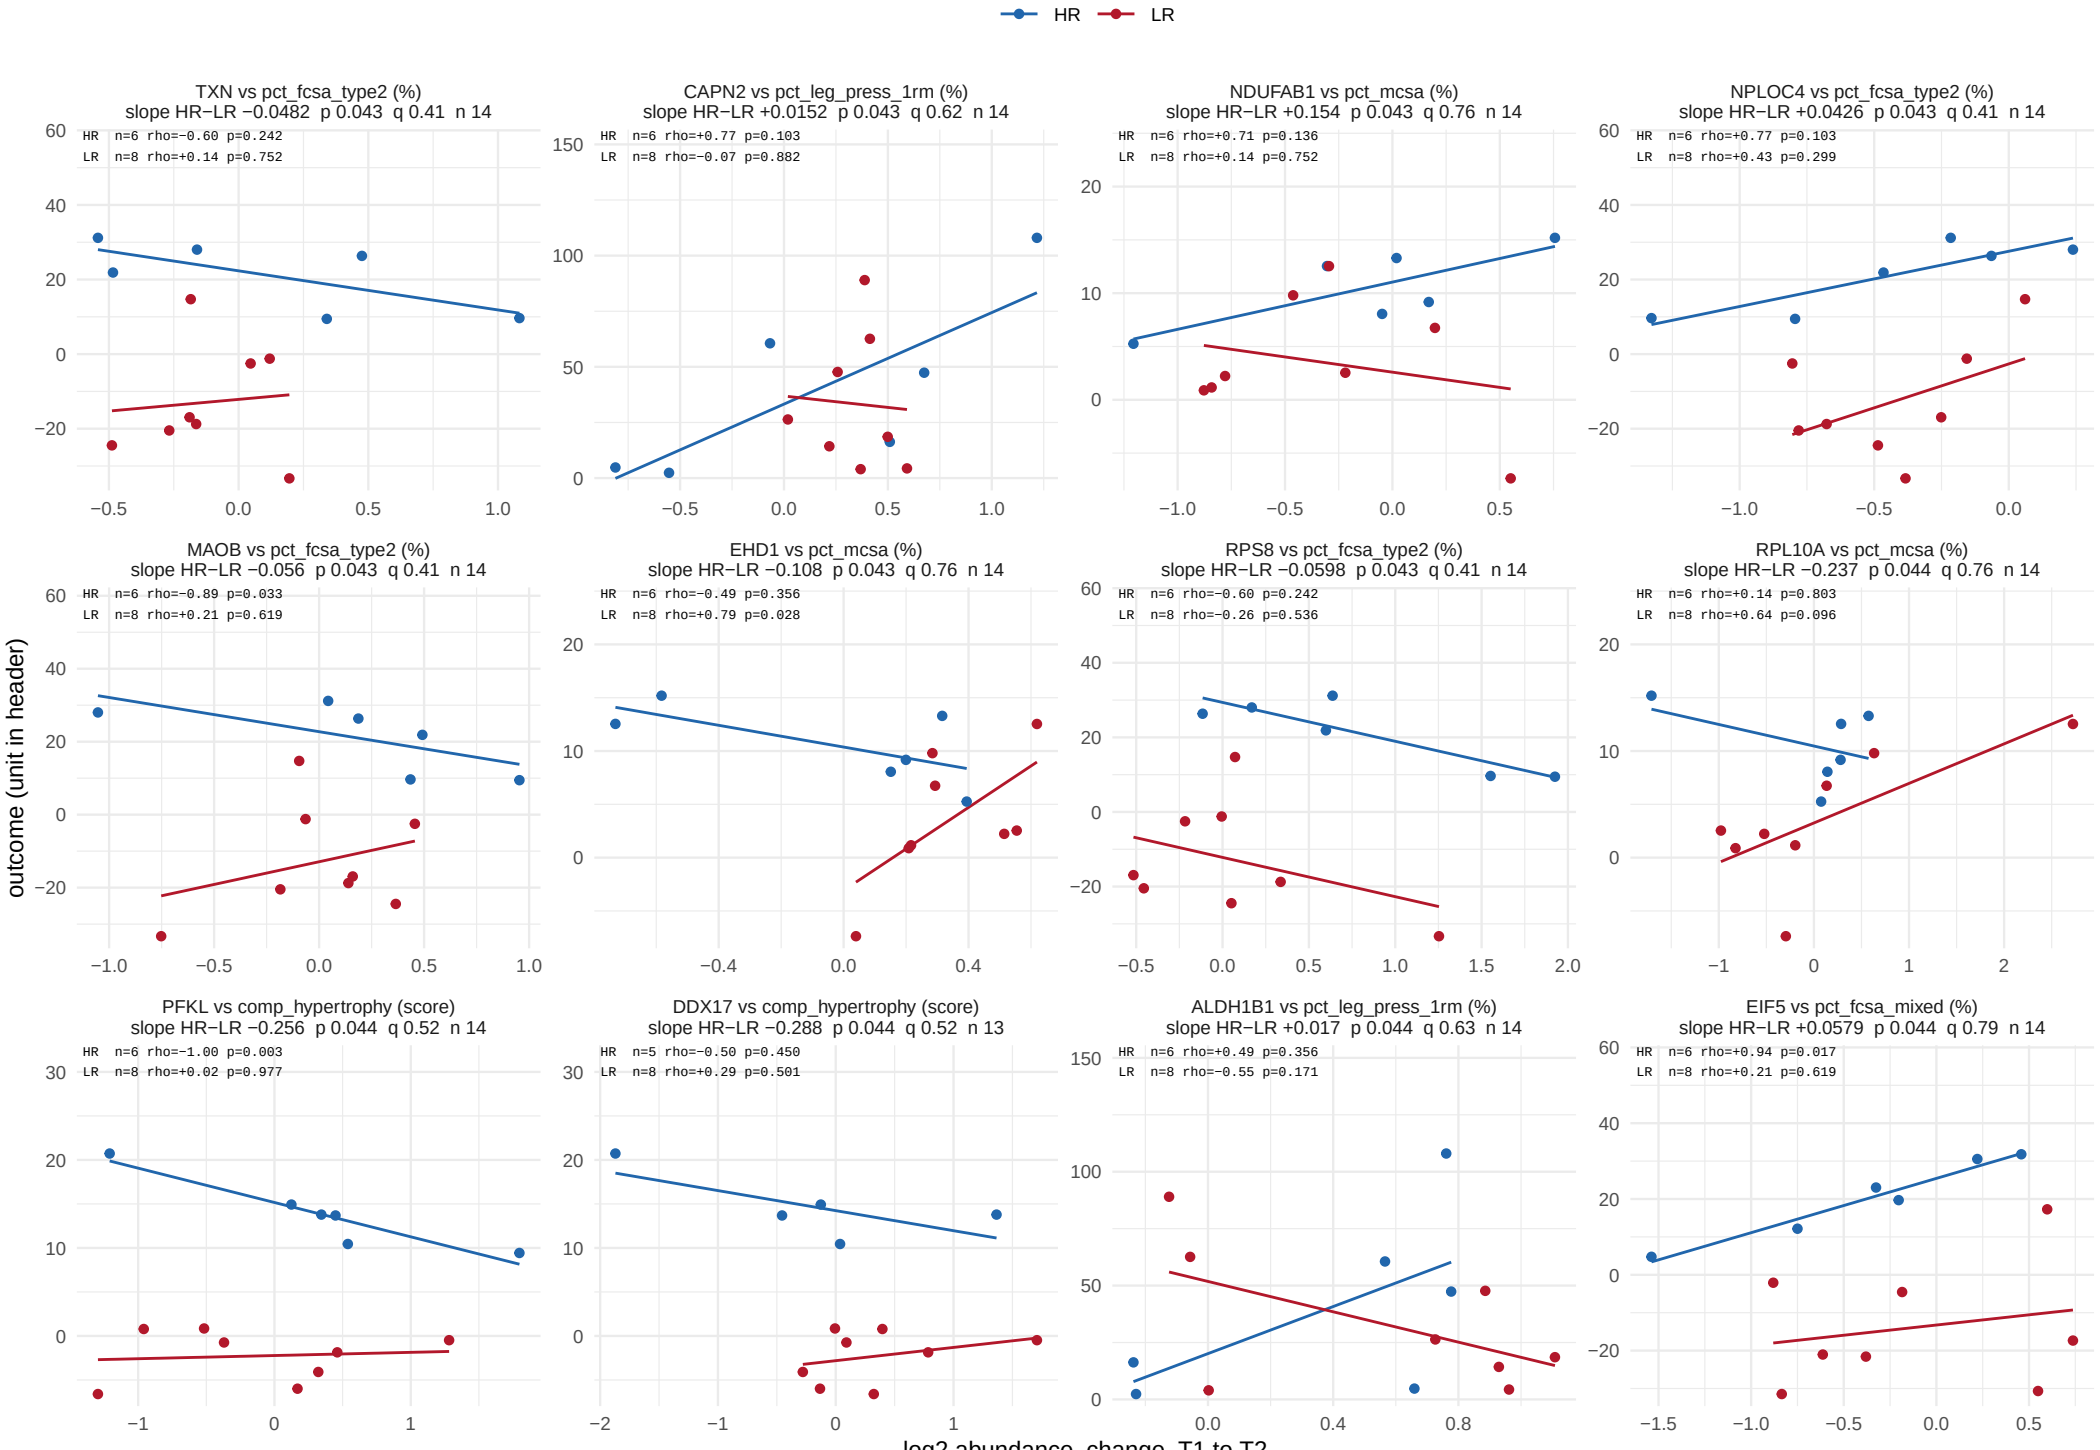

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


735 of 11282 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 57 of 62.

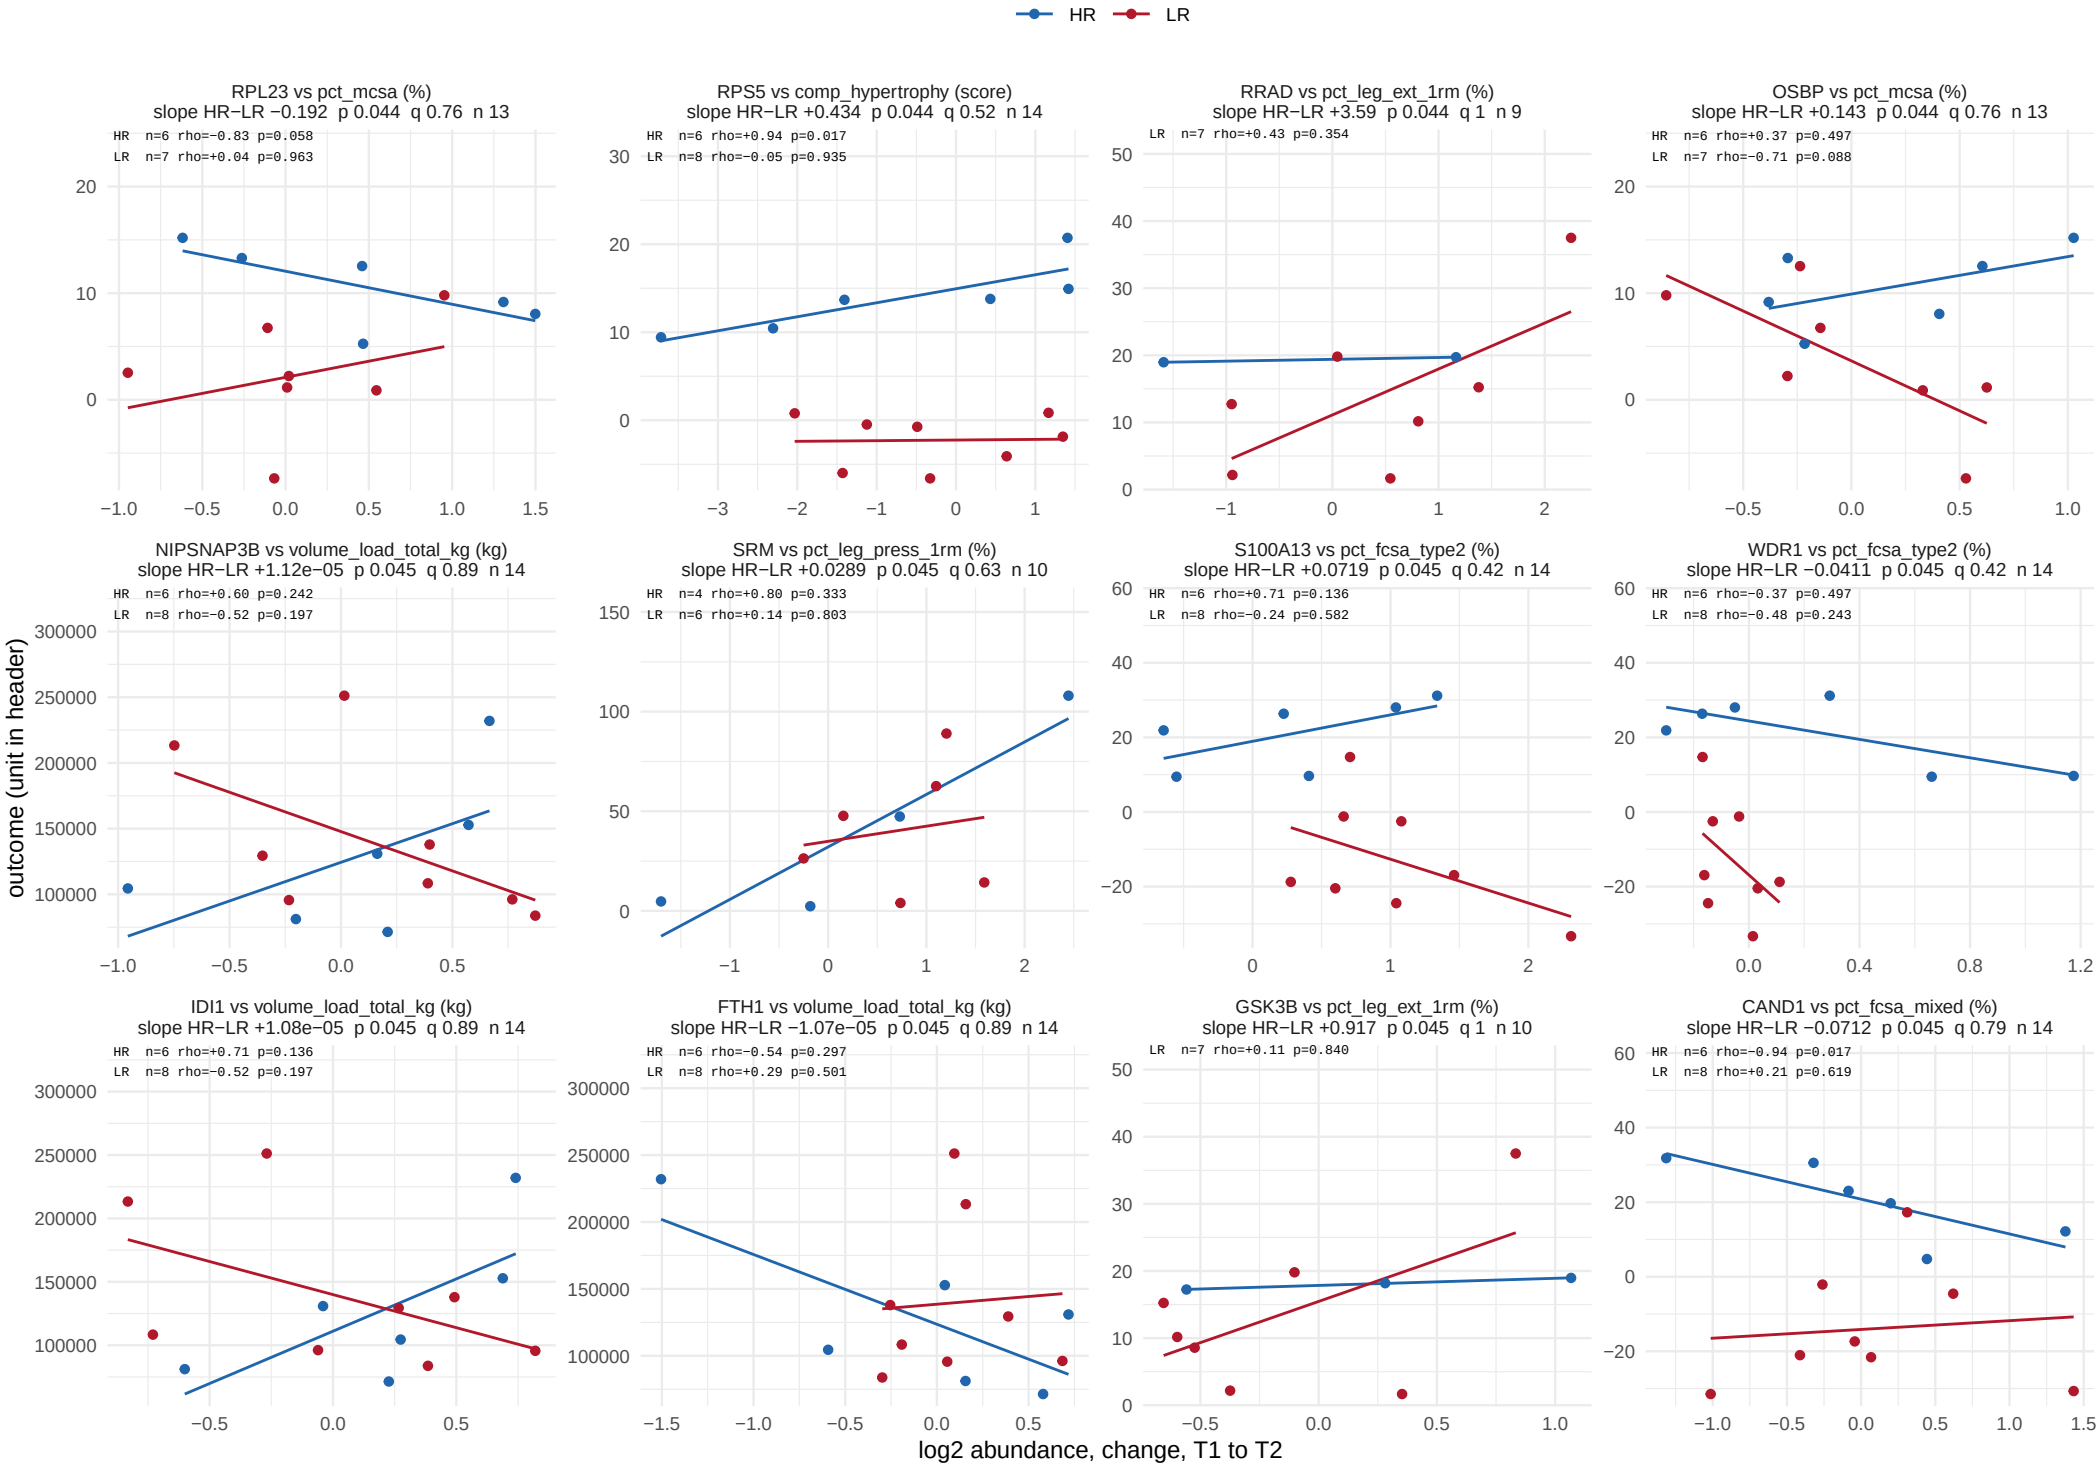

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


735 of 11282 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 58 of 62.

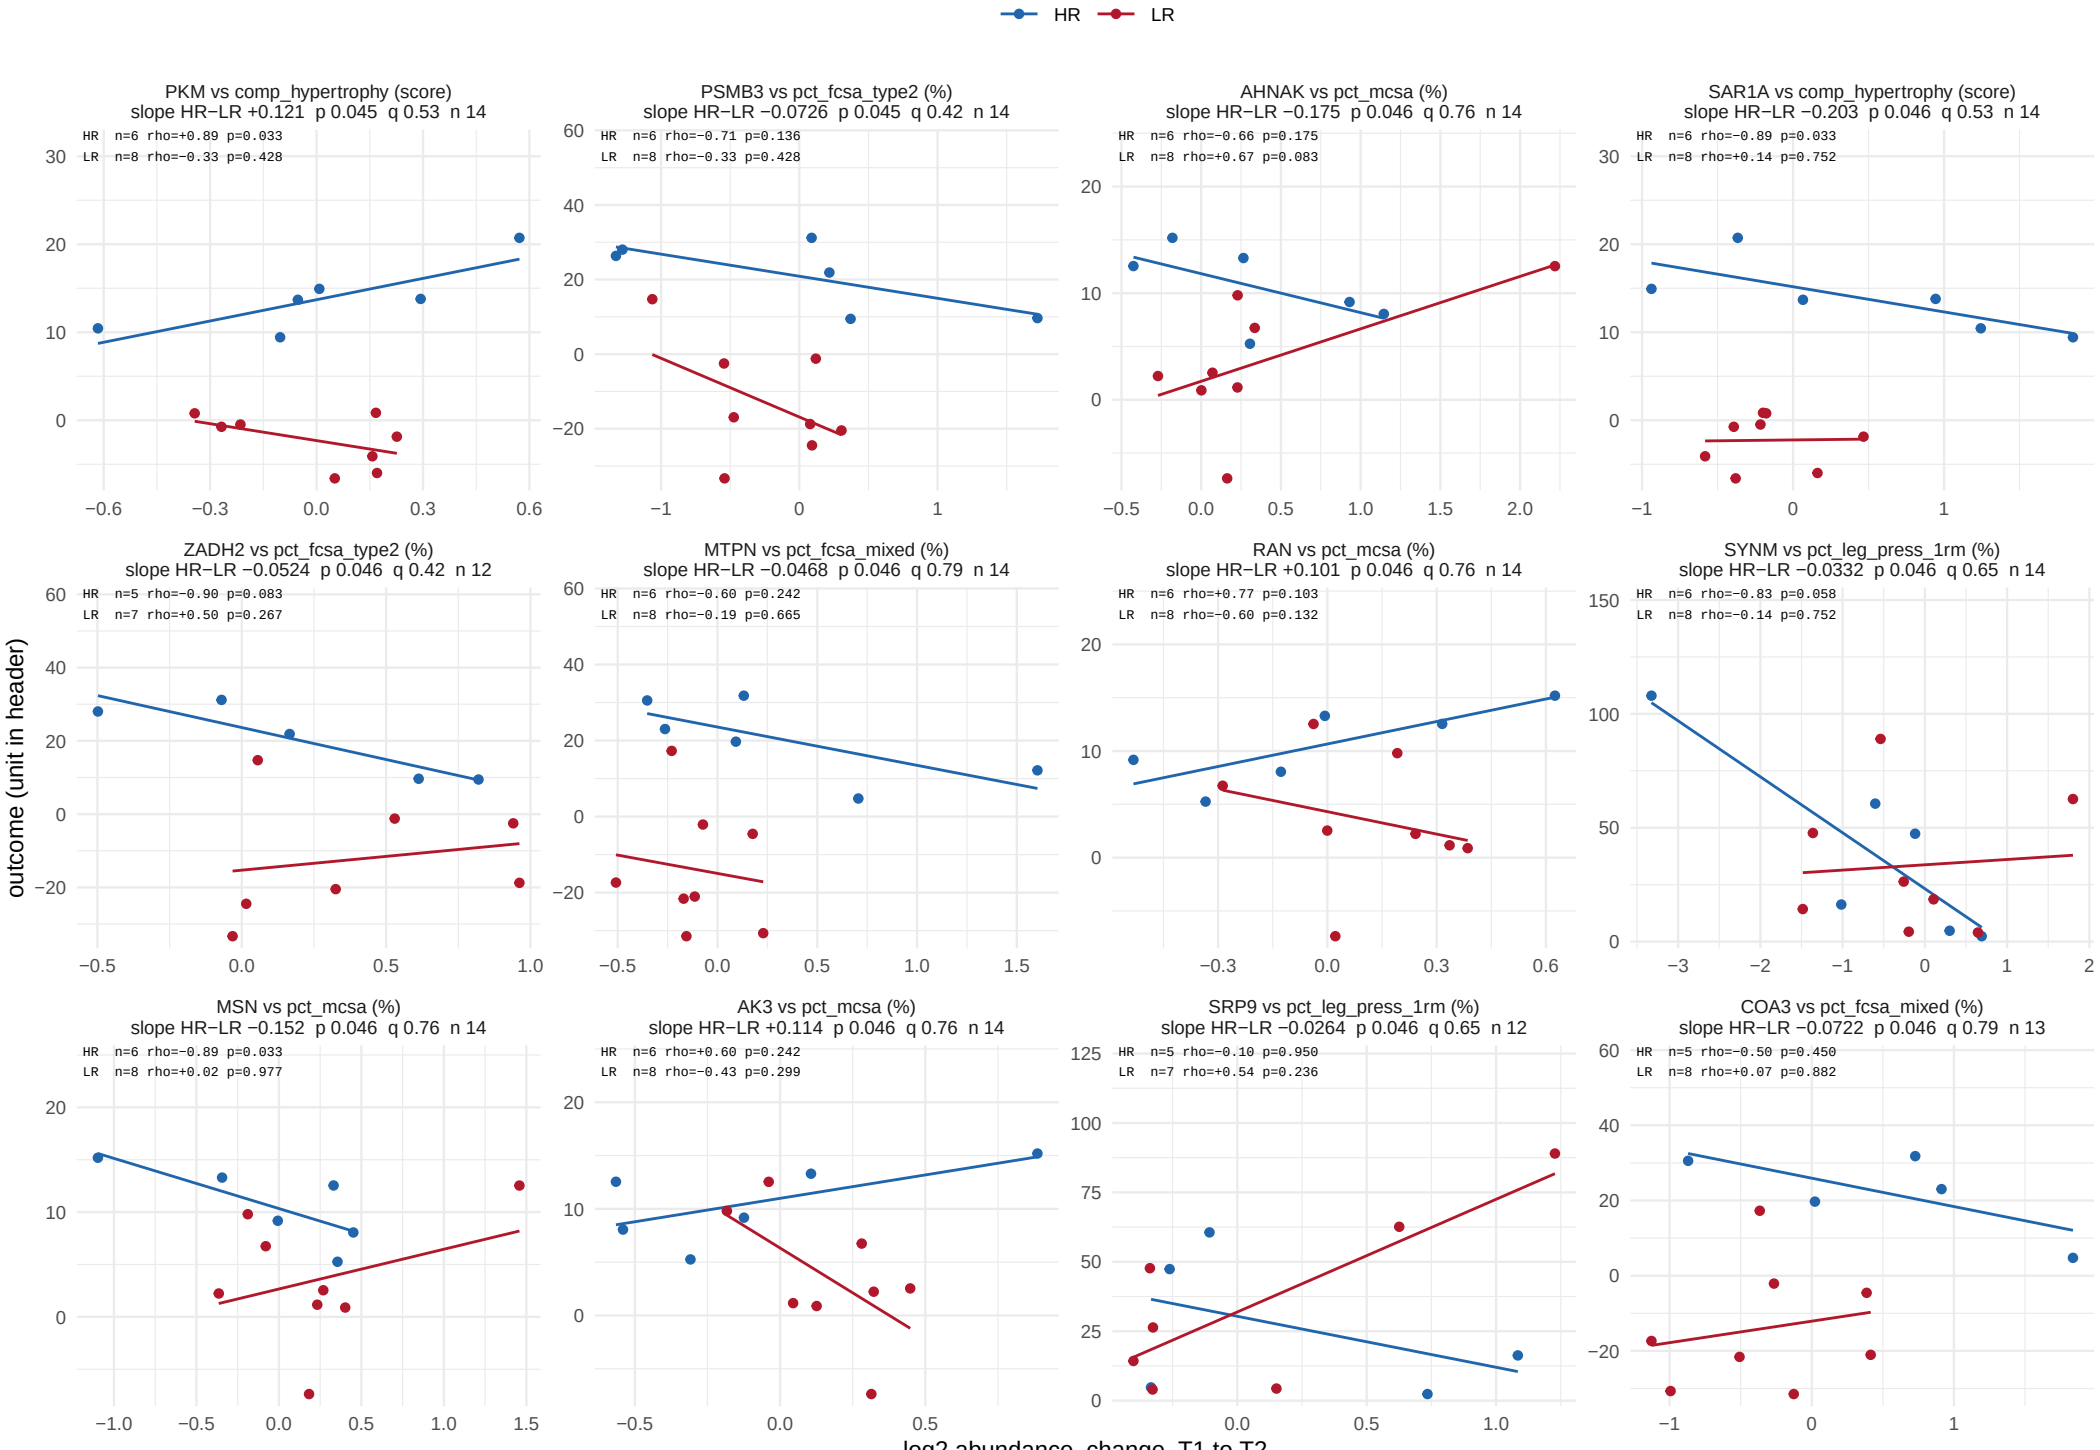

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


735 of 11282 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 59 of 62.

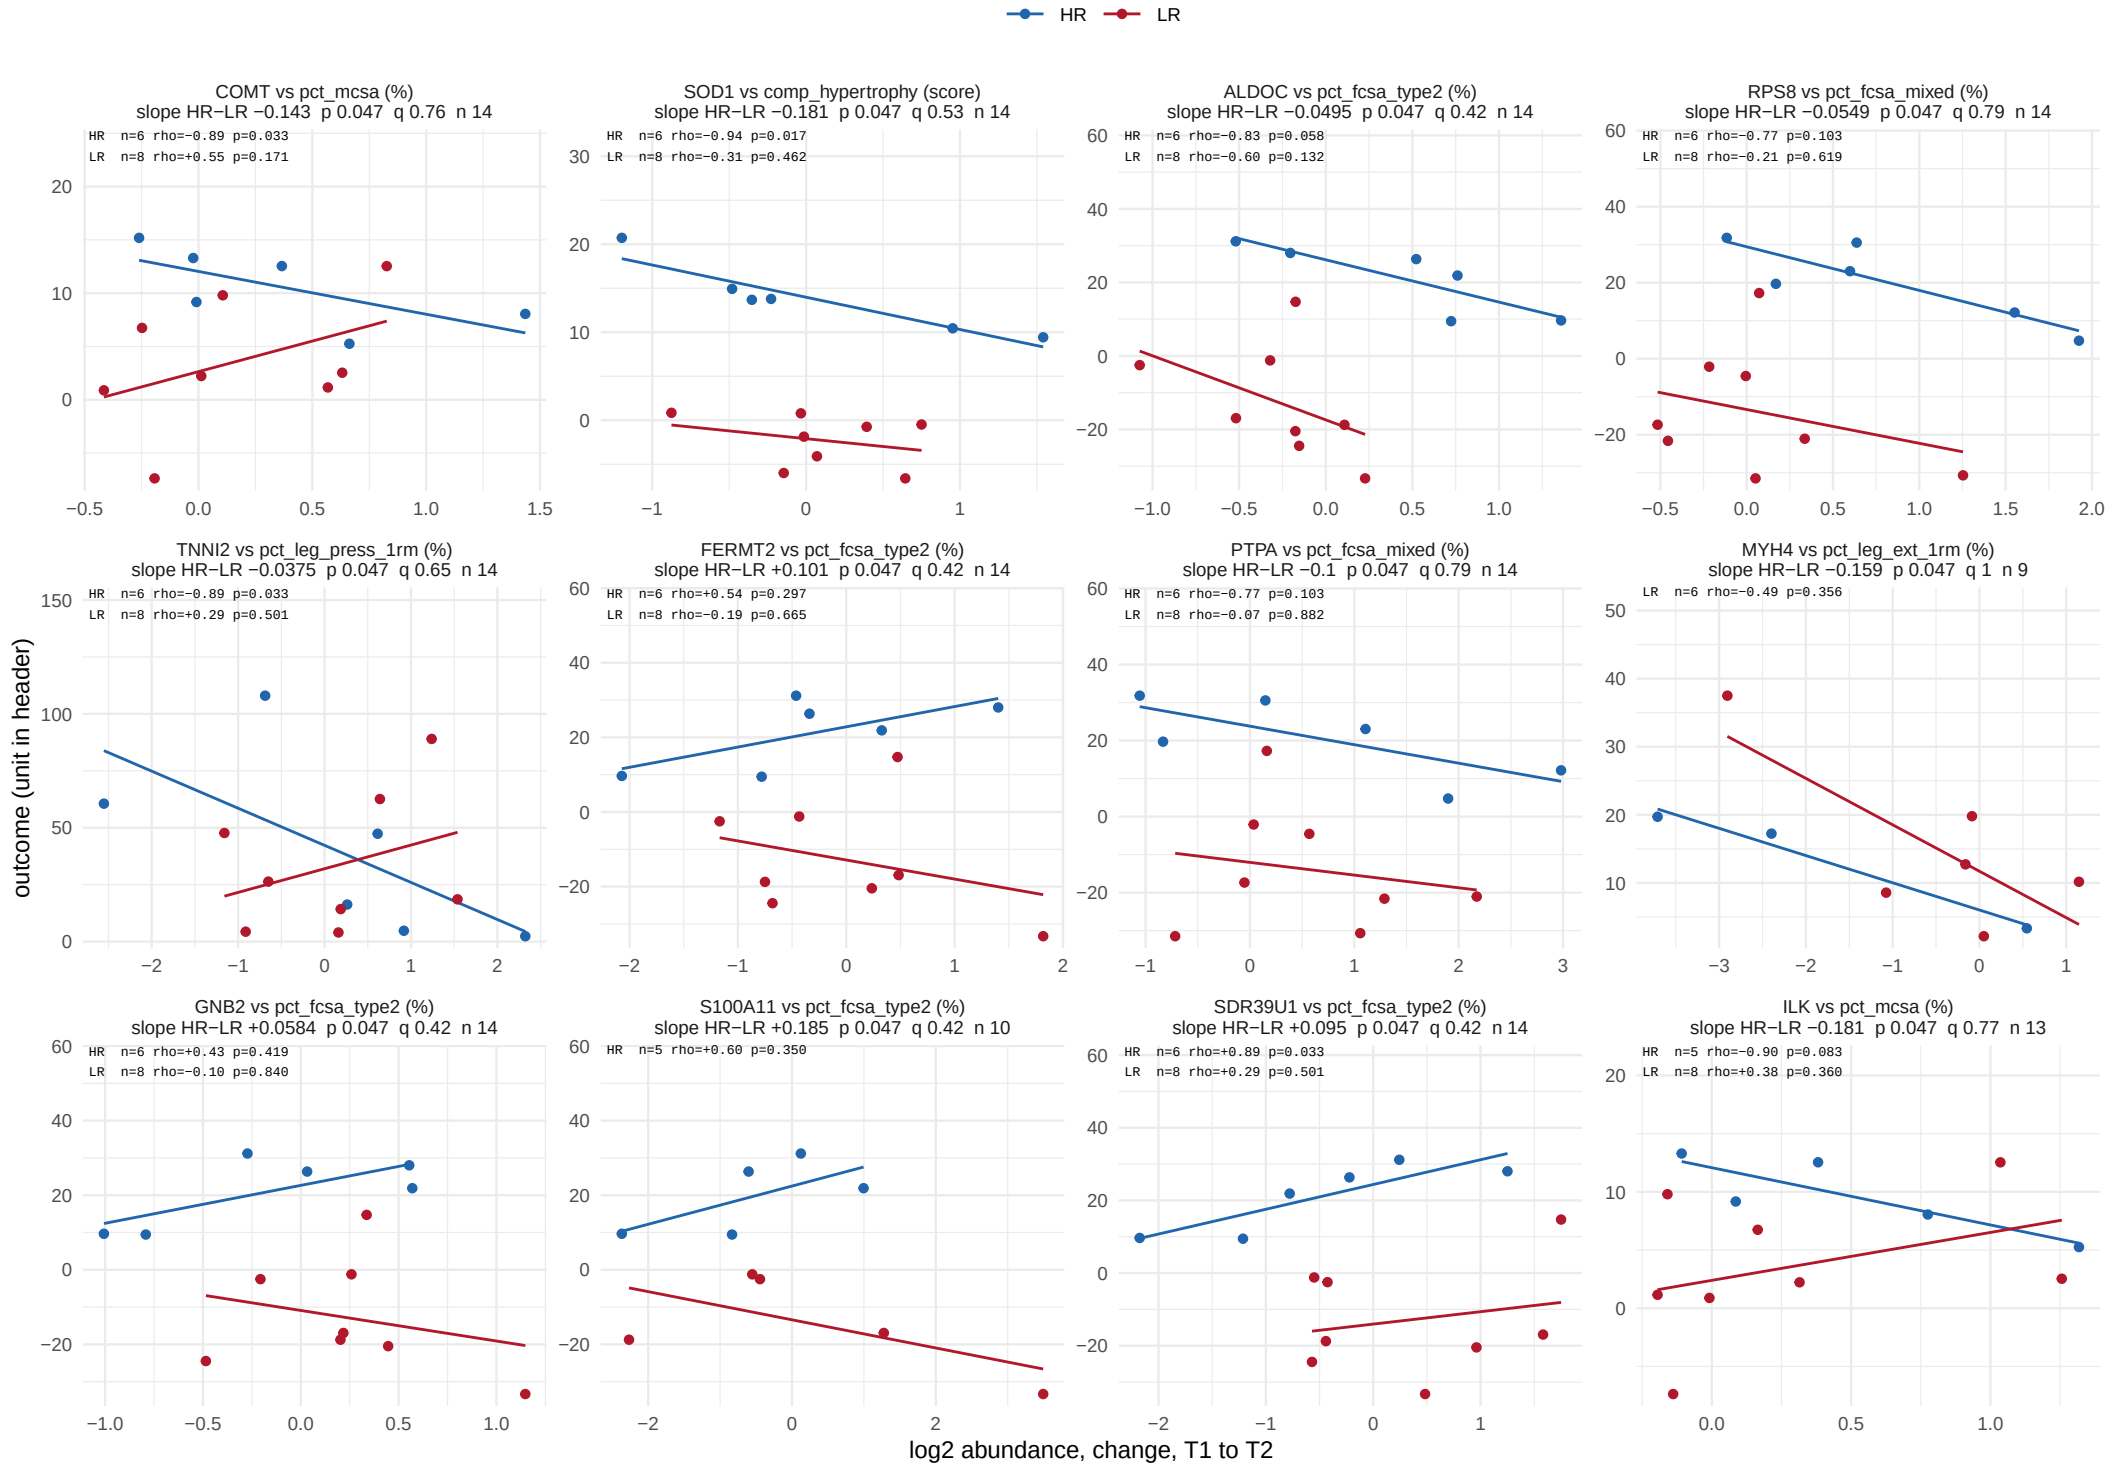

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


735 of 11282 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 60 of 62.

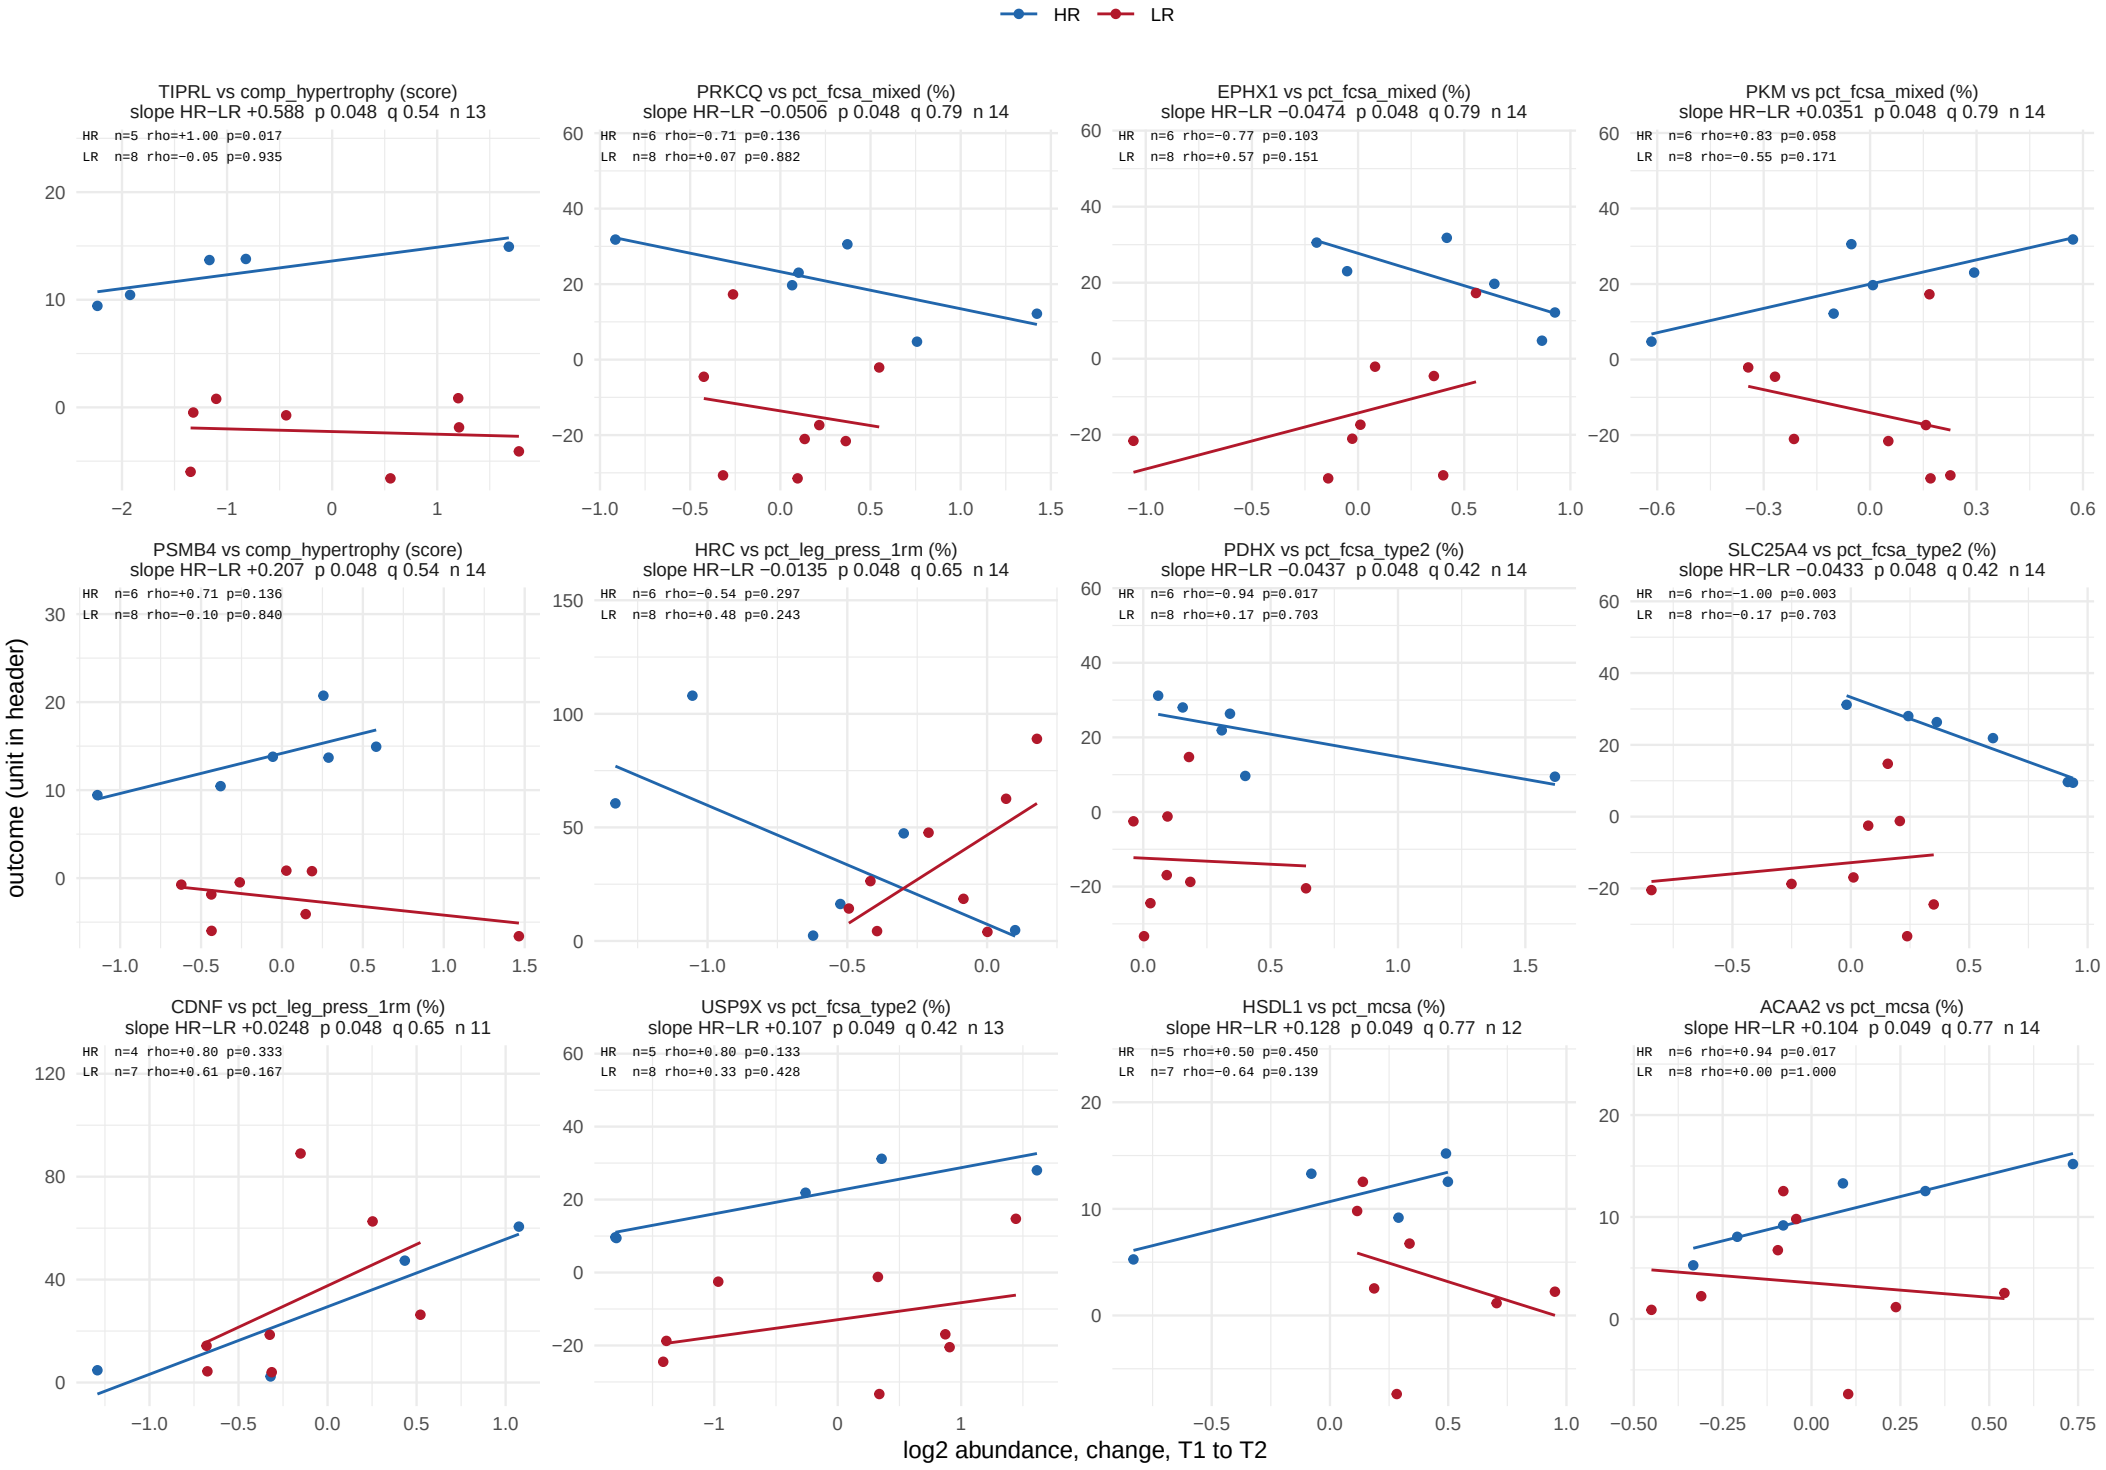

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.


Arm difference, training window

735 of 11282 feature−outcome pairs at p < 0.05, 28 at BH < 0.05. Page 61 of 62.

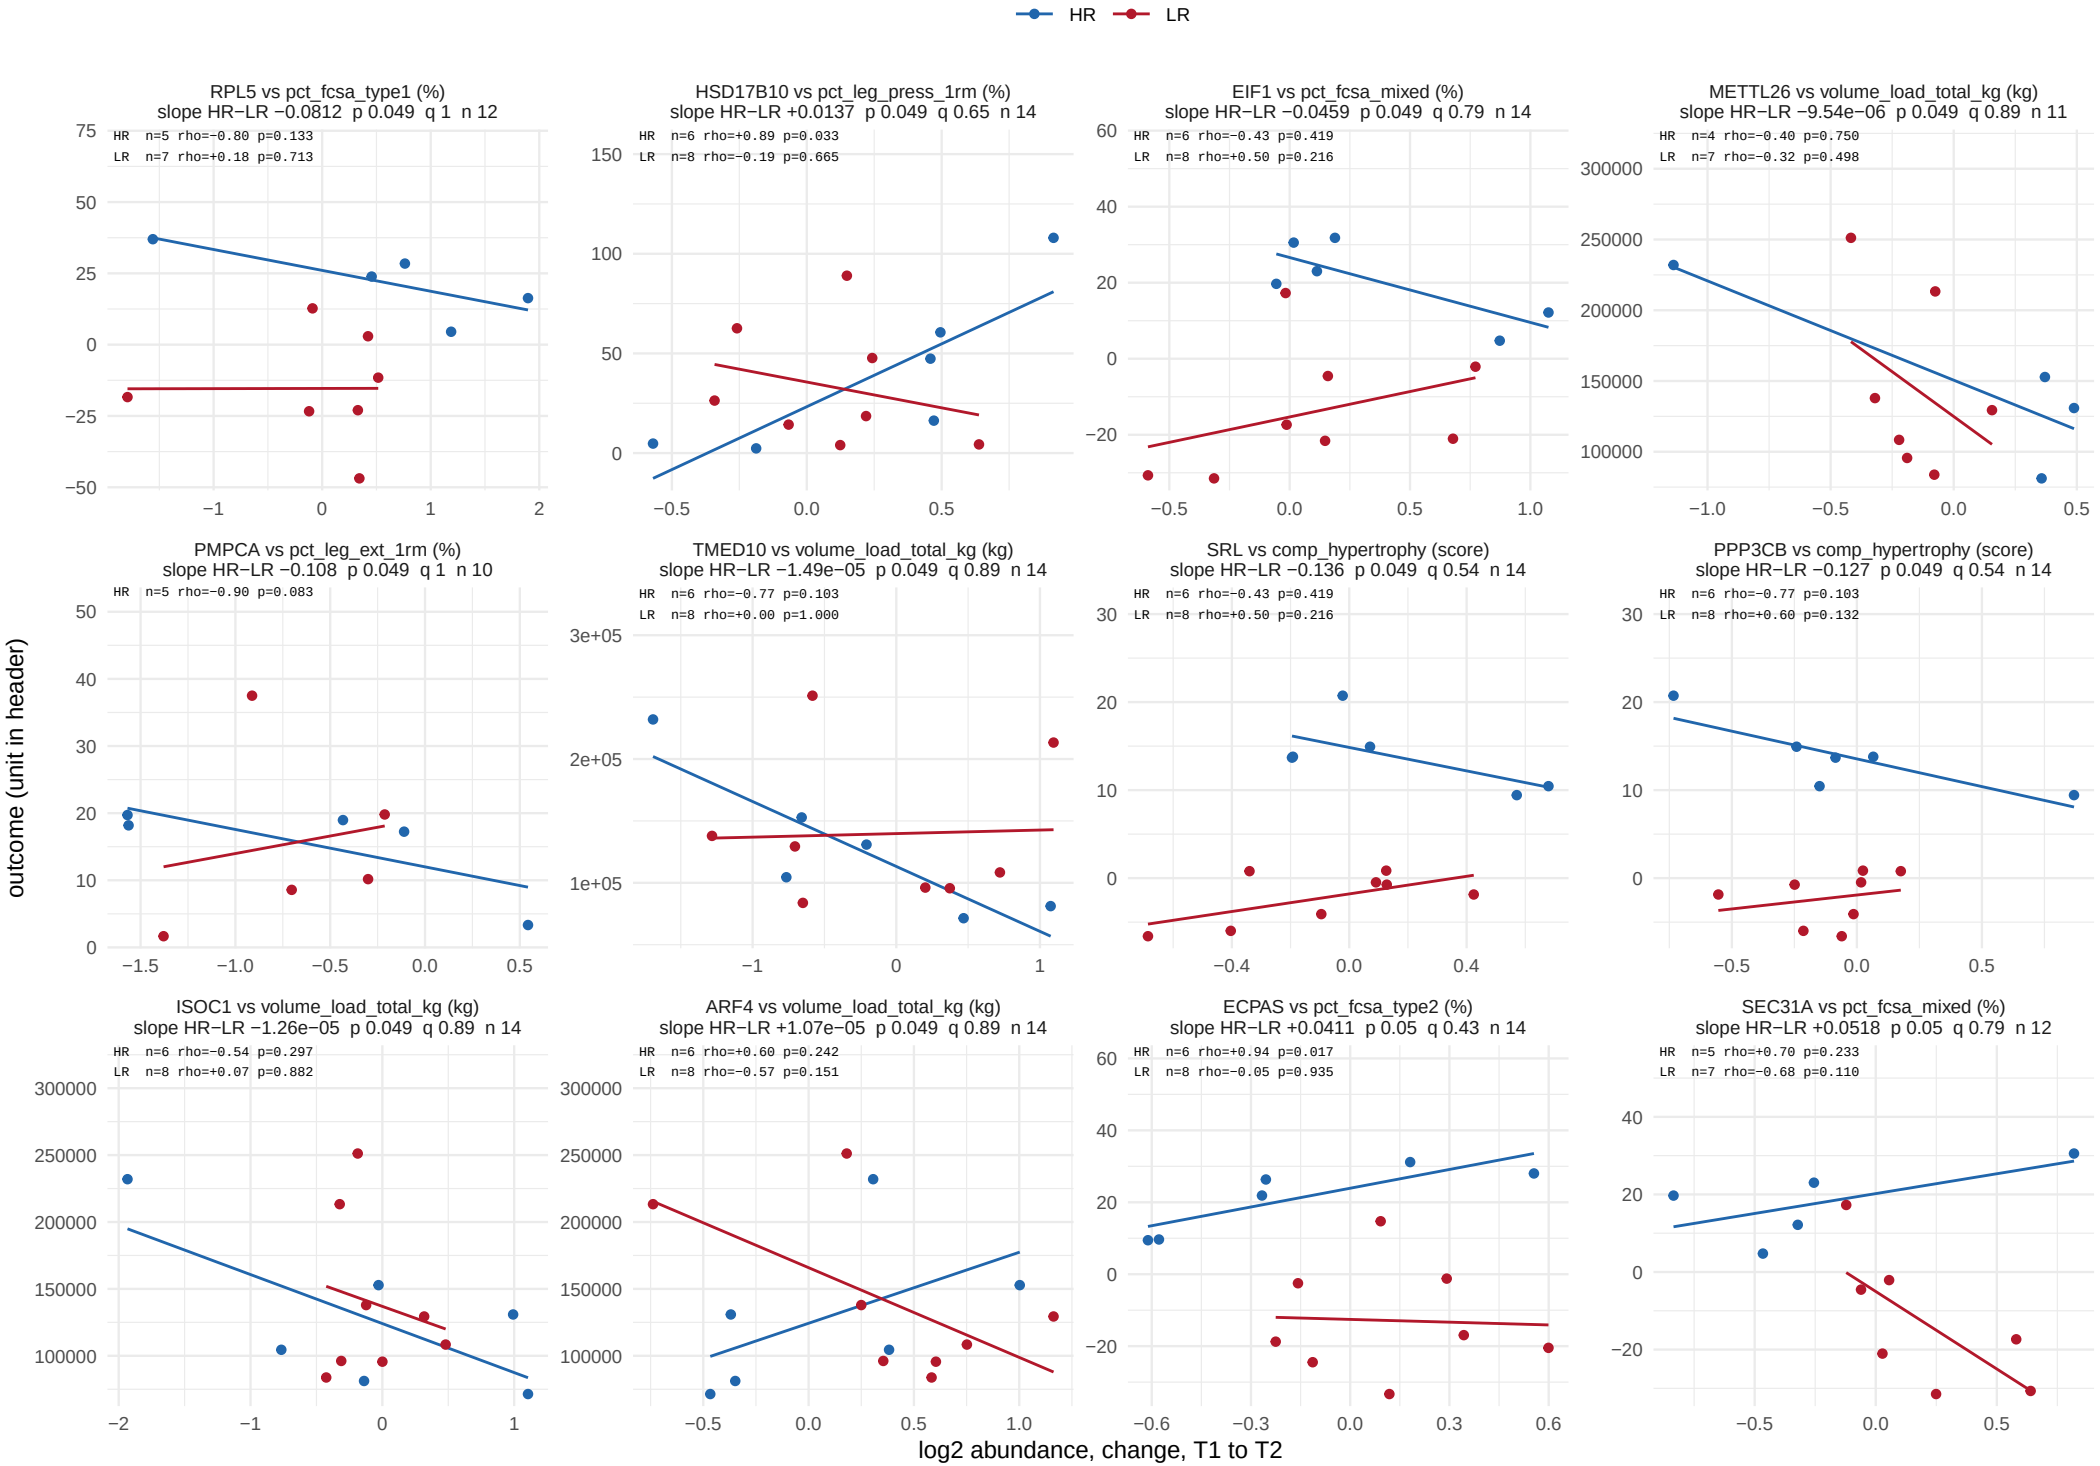

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.


Arm difference, training window

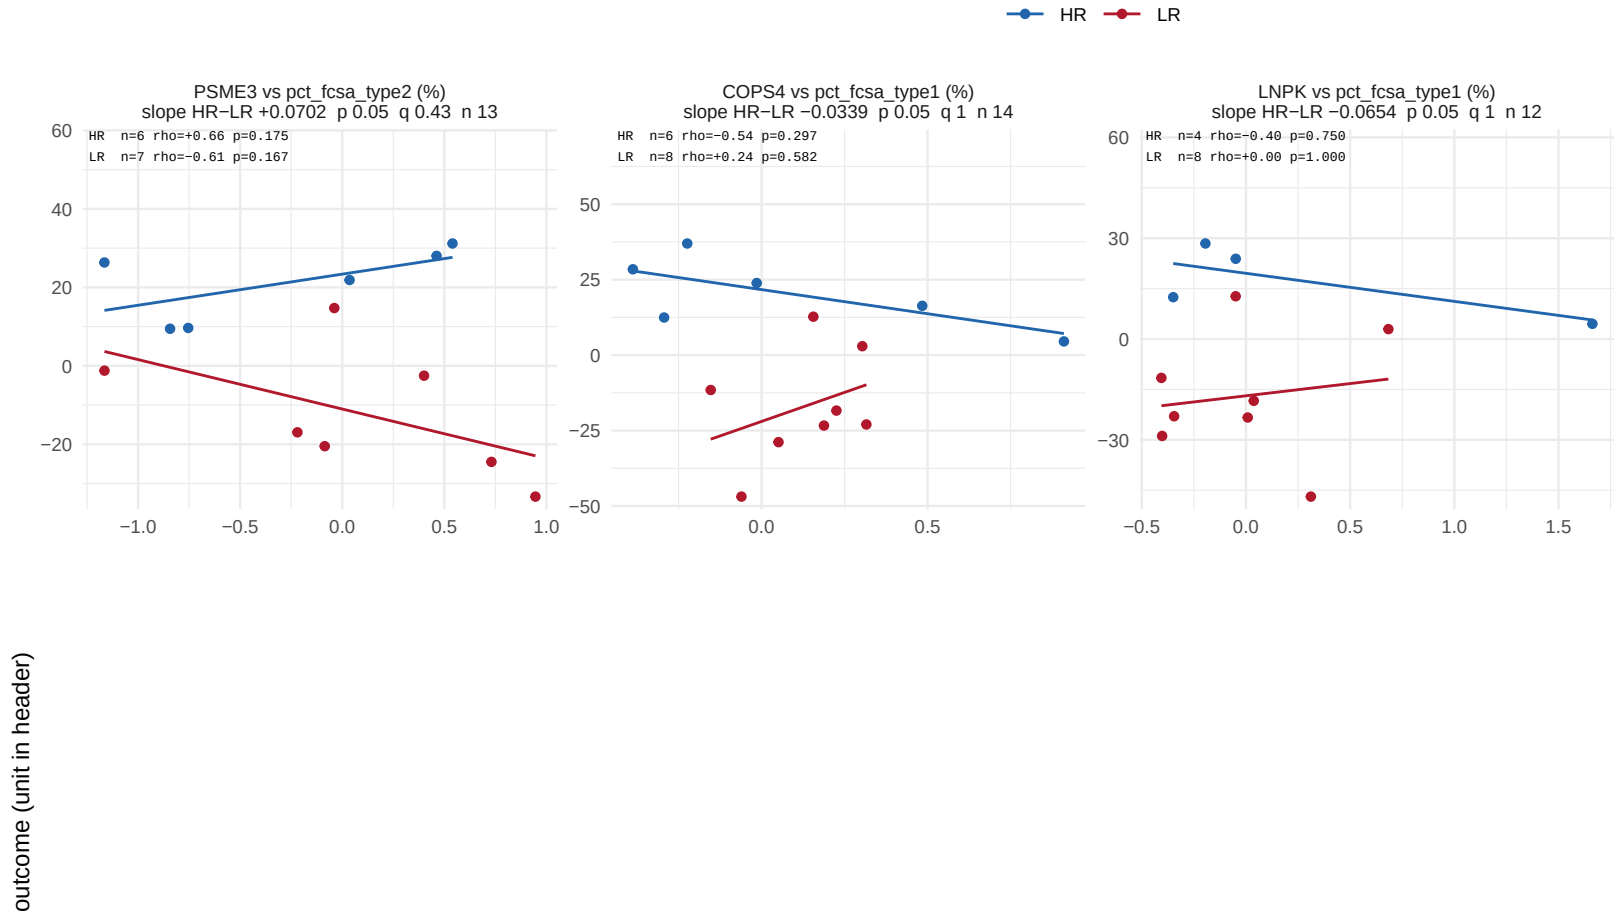

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


721 of 12553 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 1 of 61.

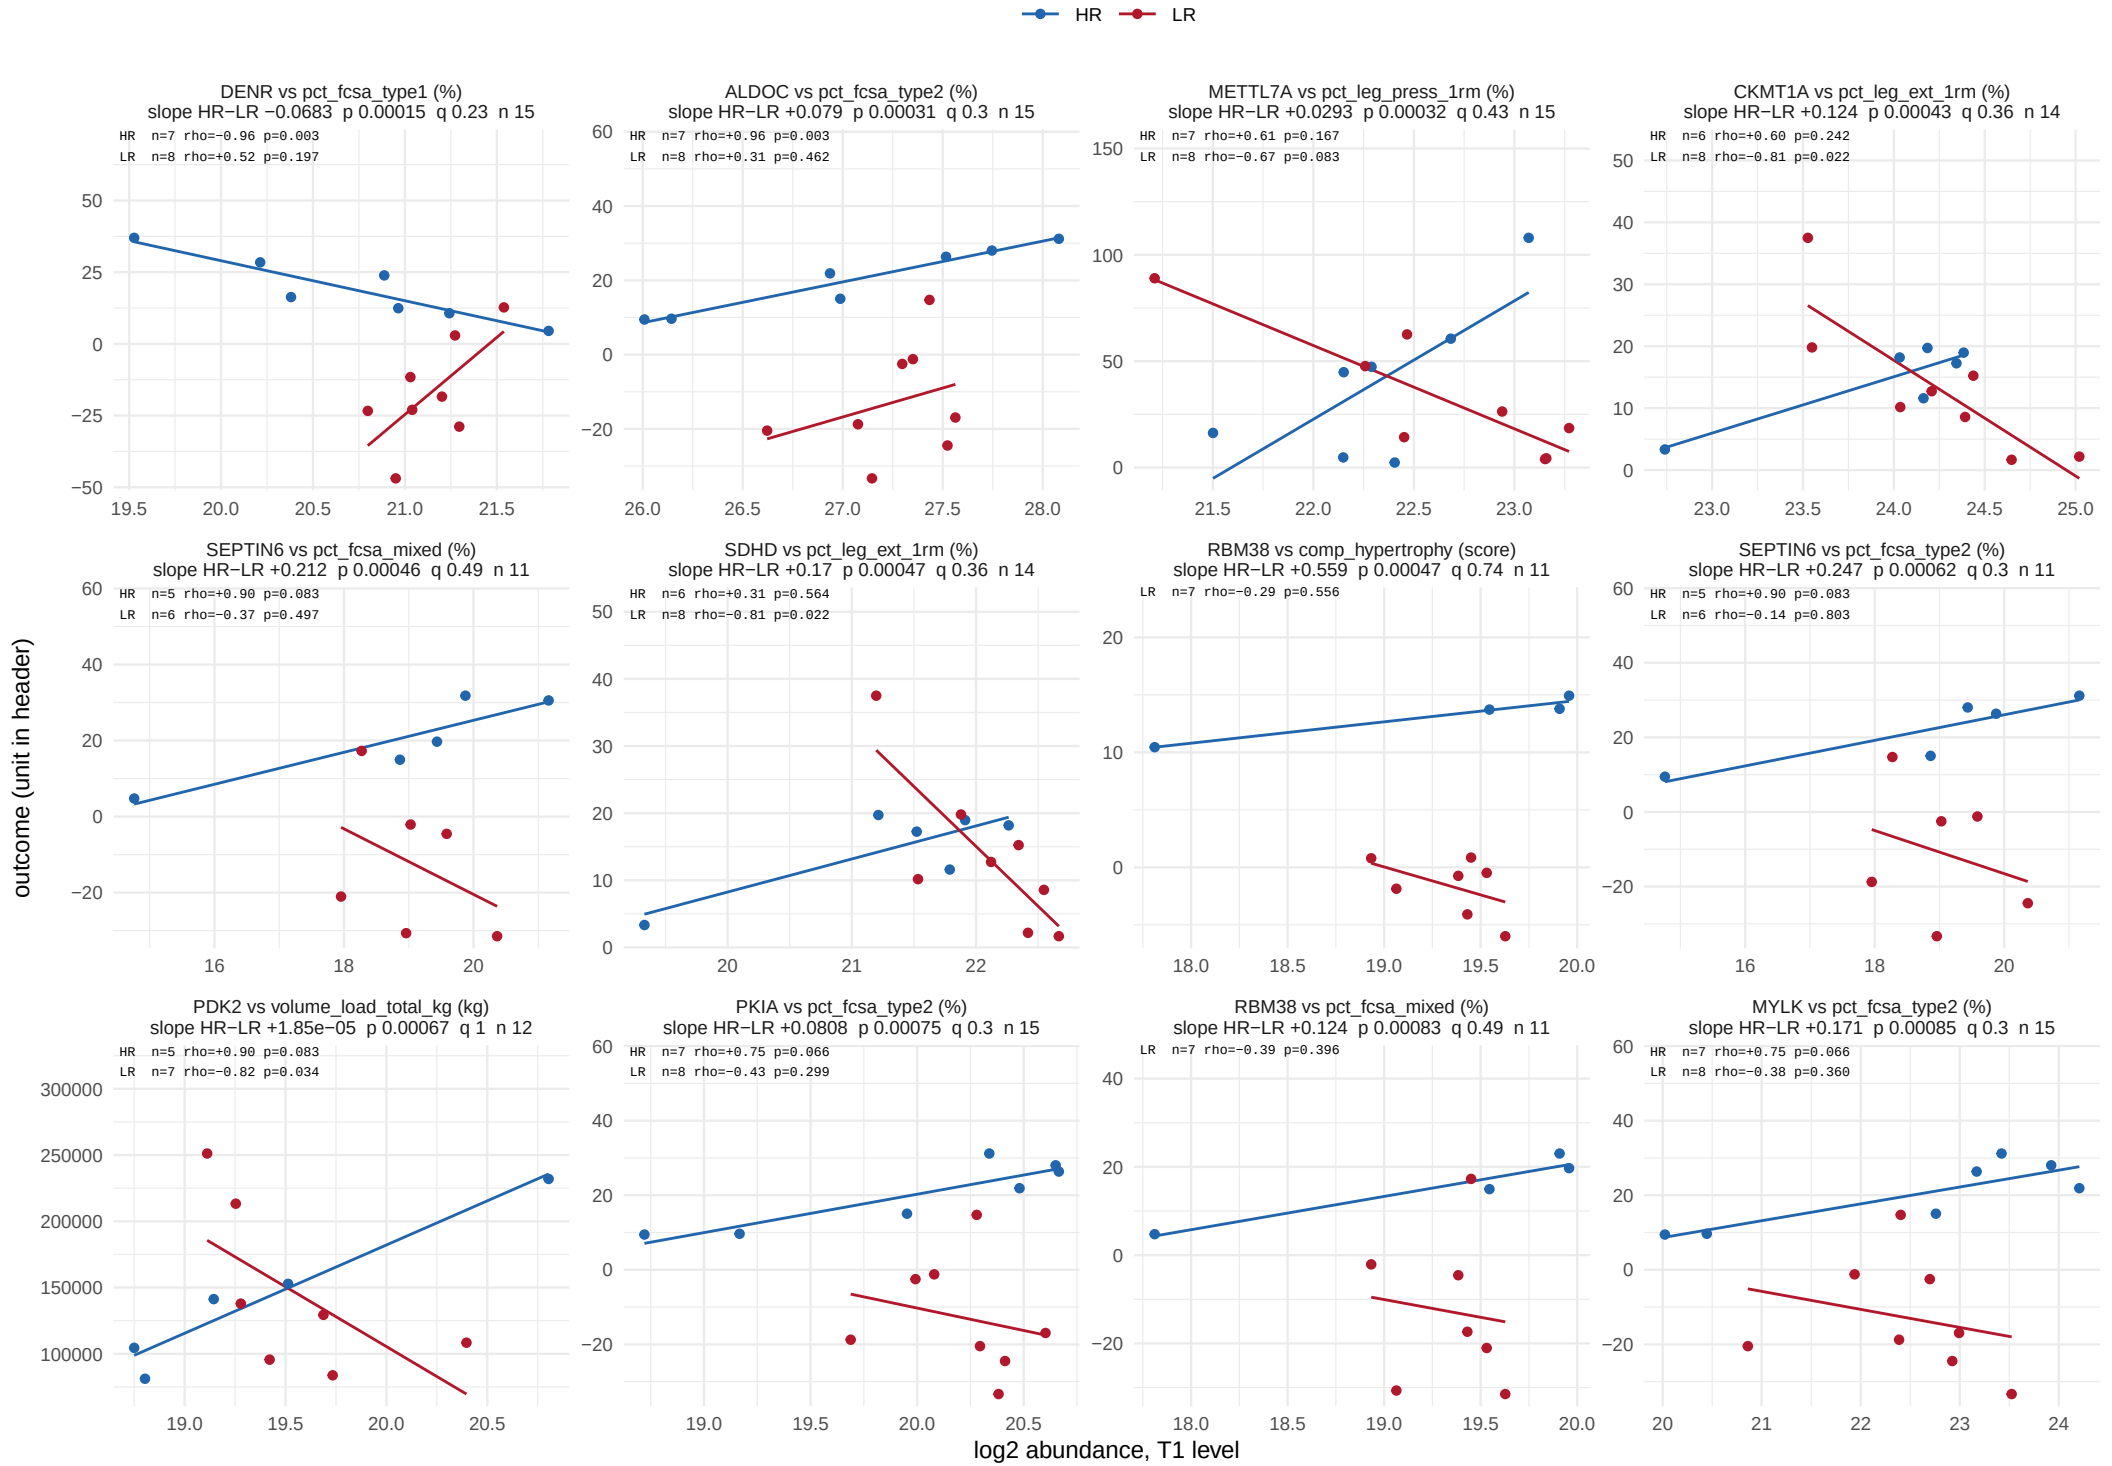

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


721 of 12553 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 2 of 61.

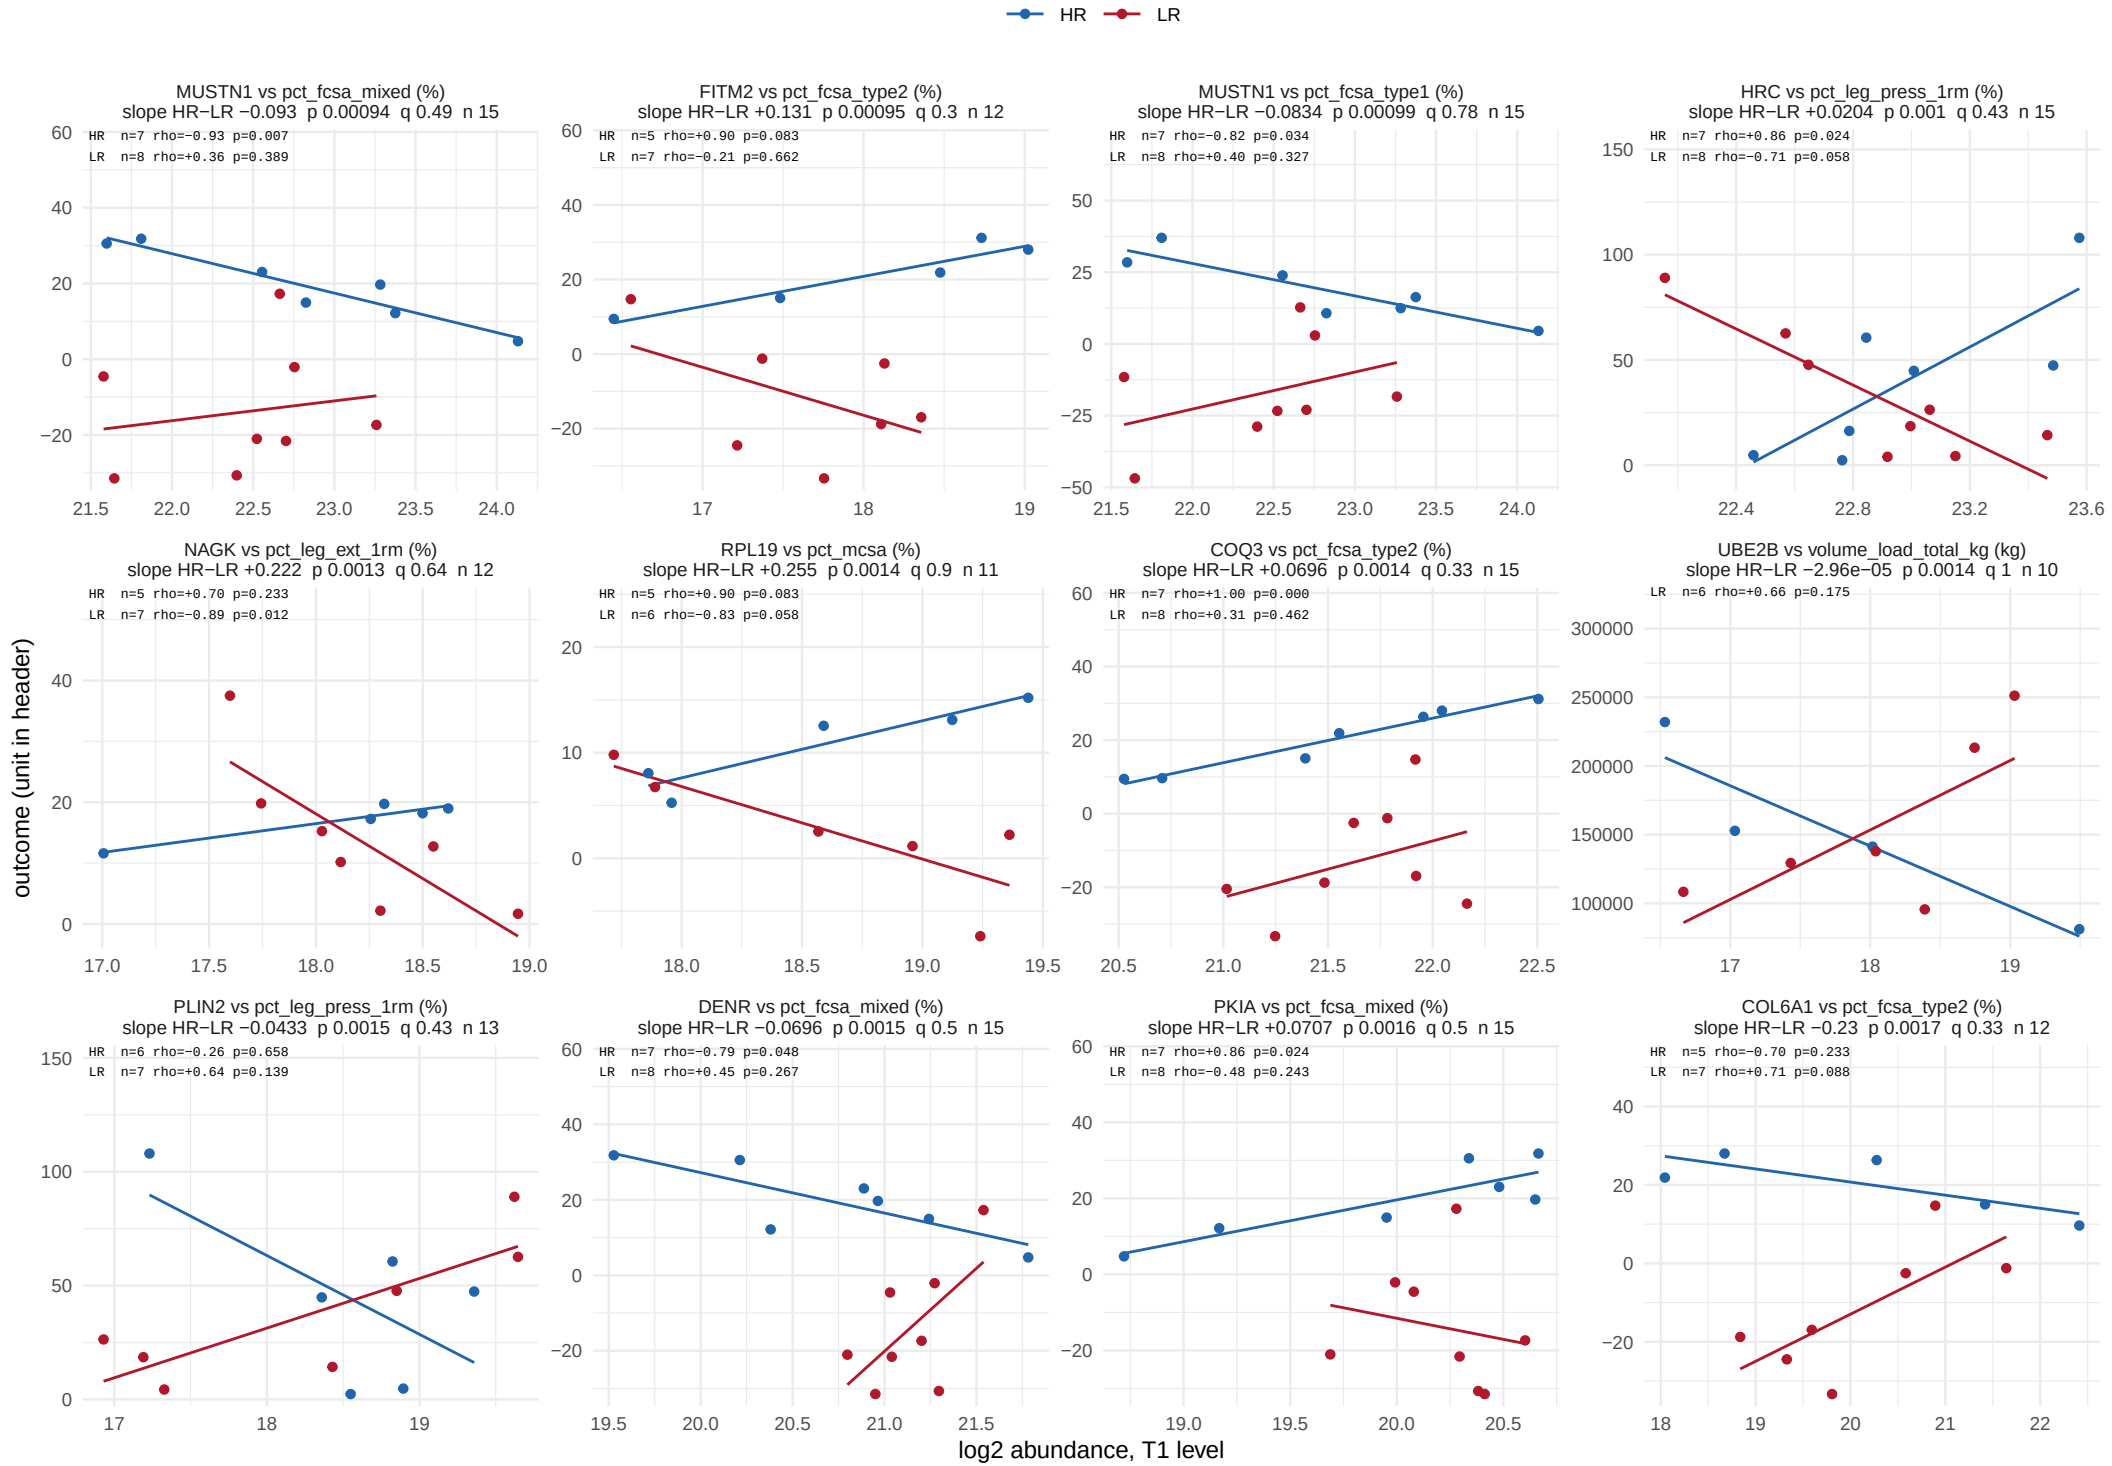

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


721 of 12553 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 3 of 61.

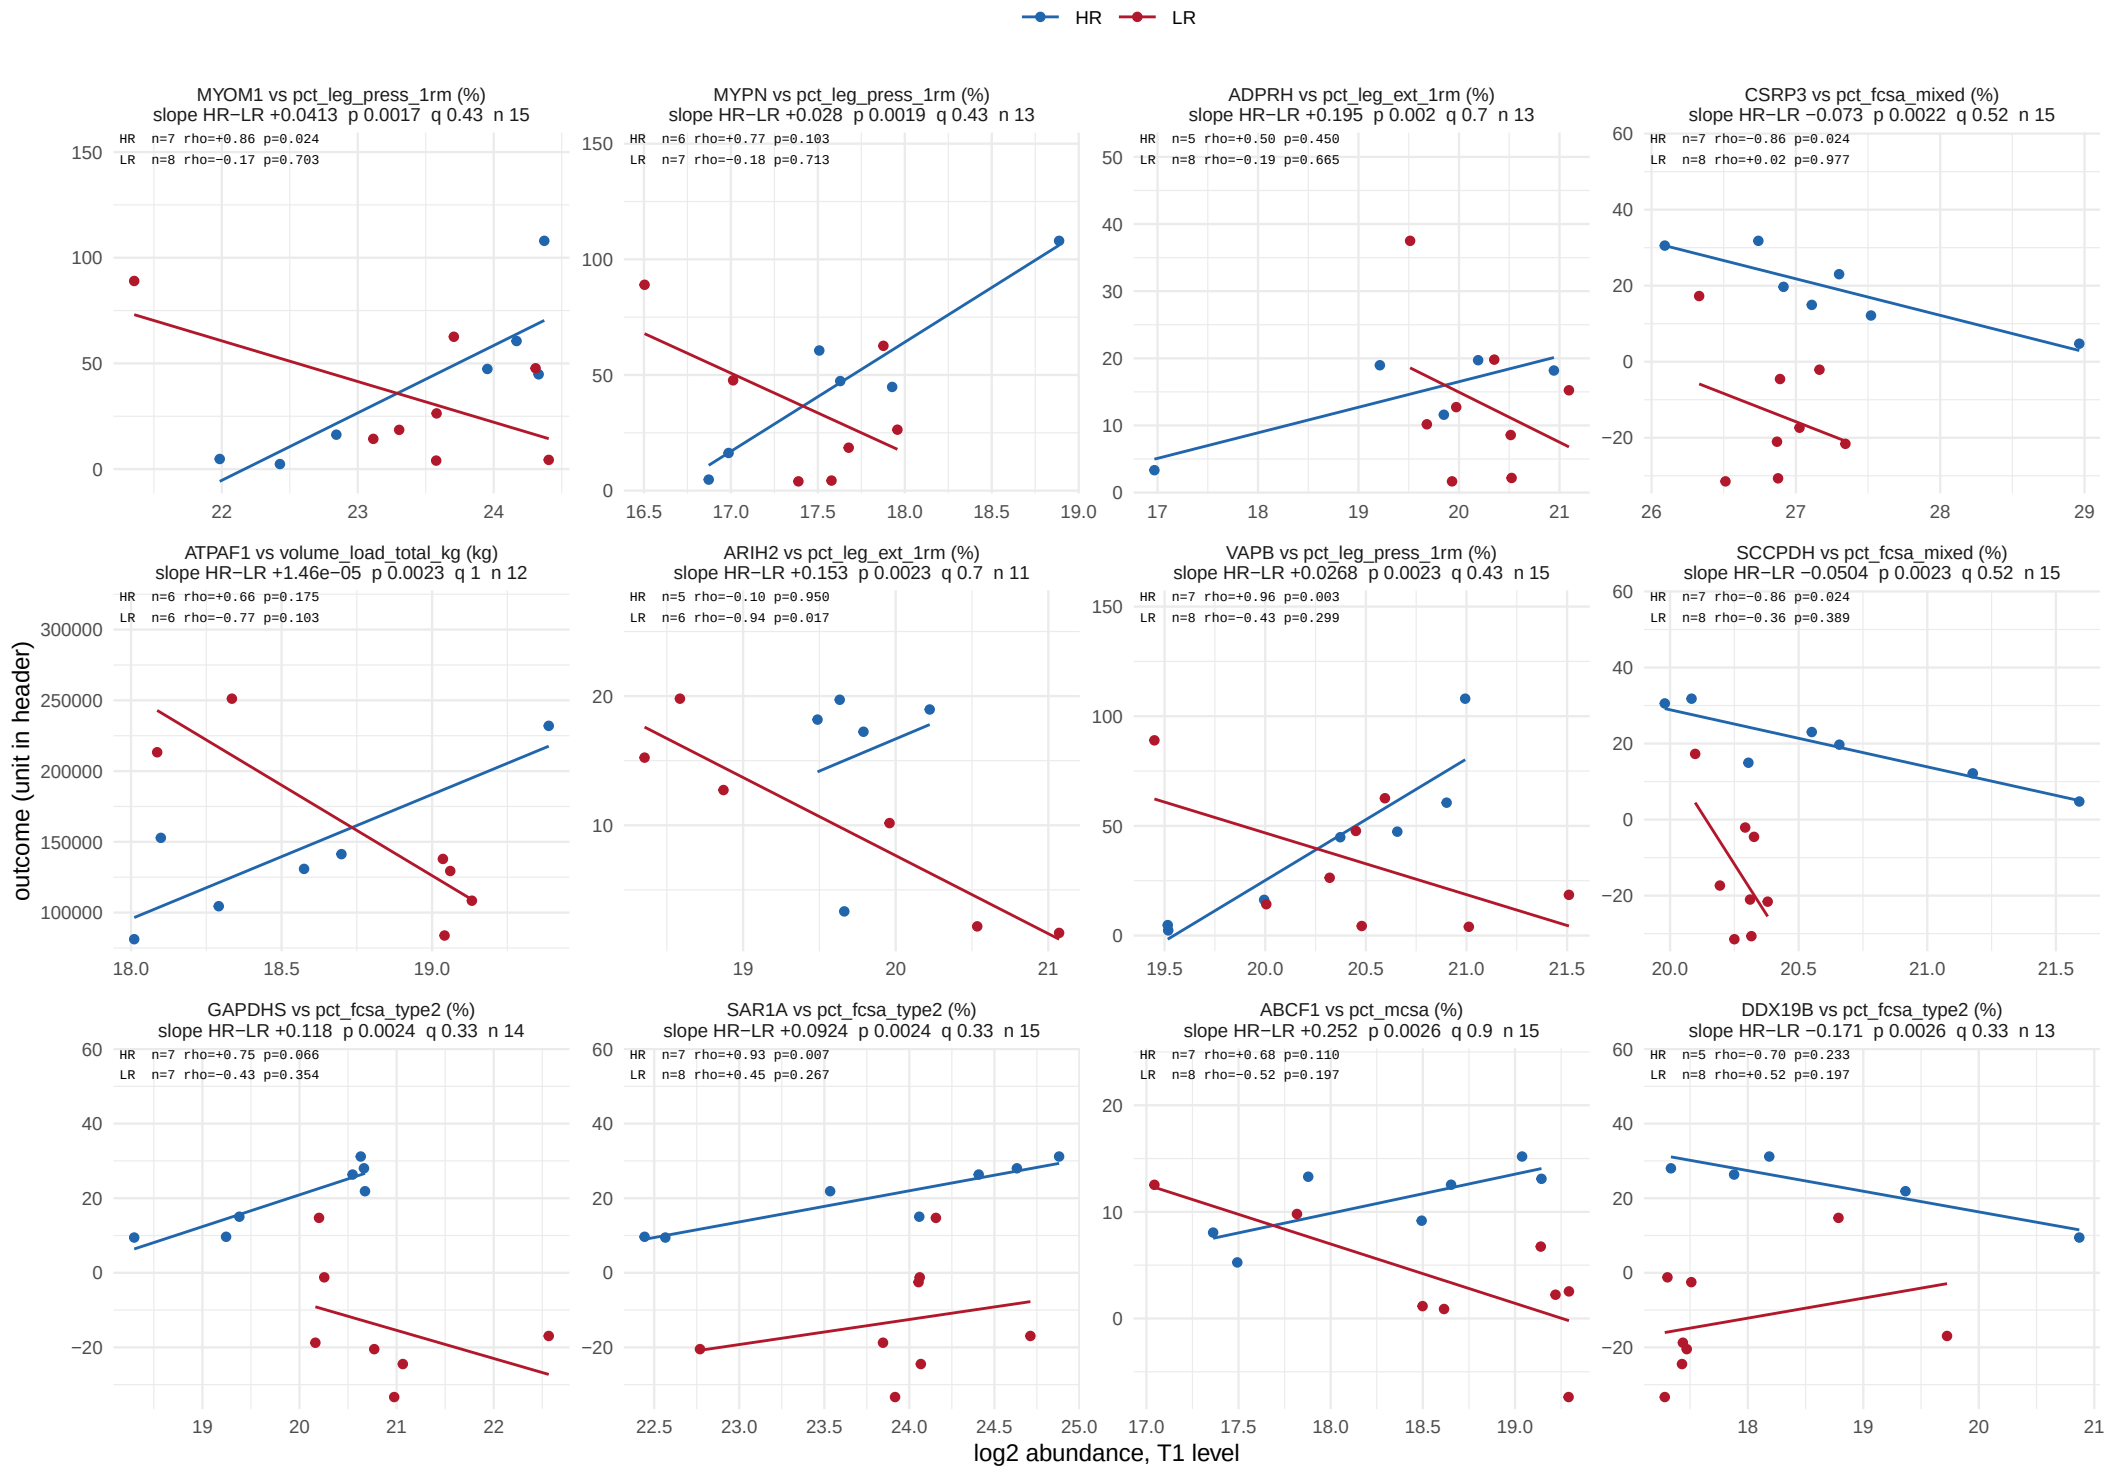

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


721 of 12553 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 4 of 61.

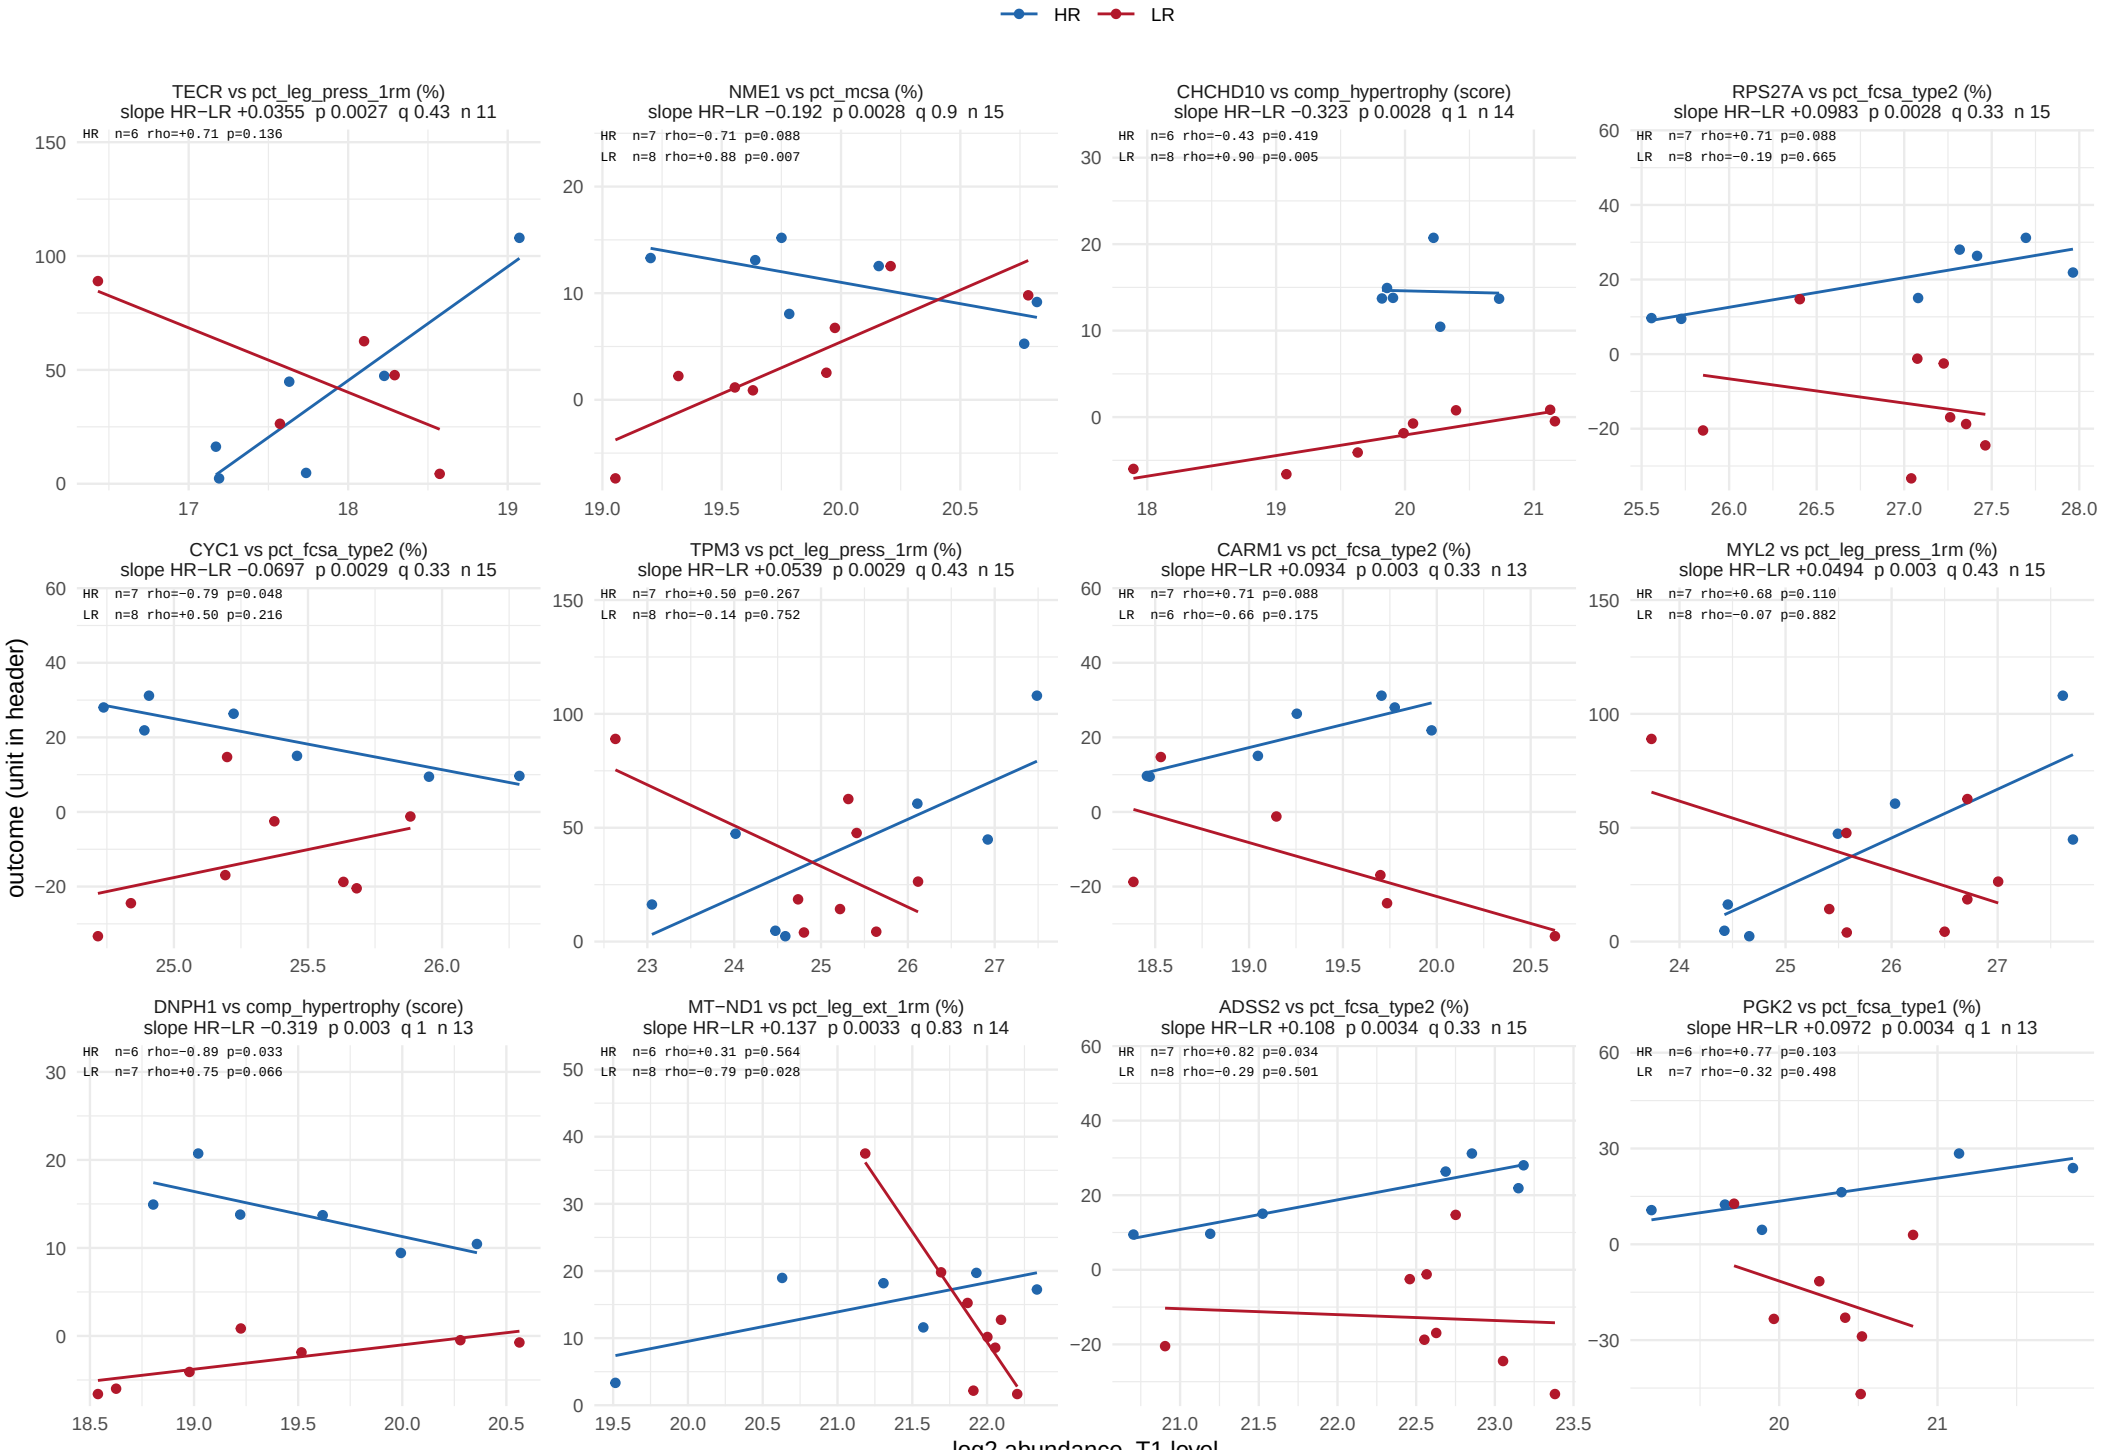

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


721 of 12553 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 5 of 61.

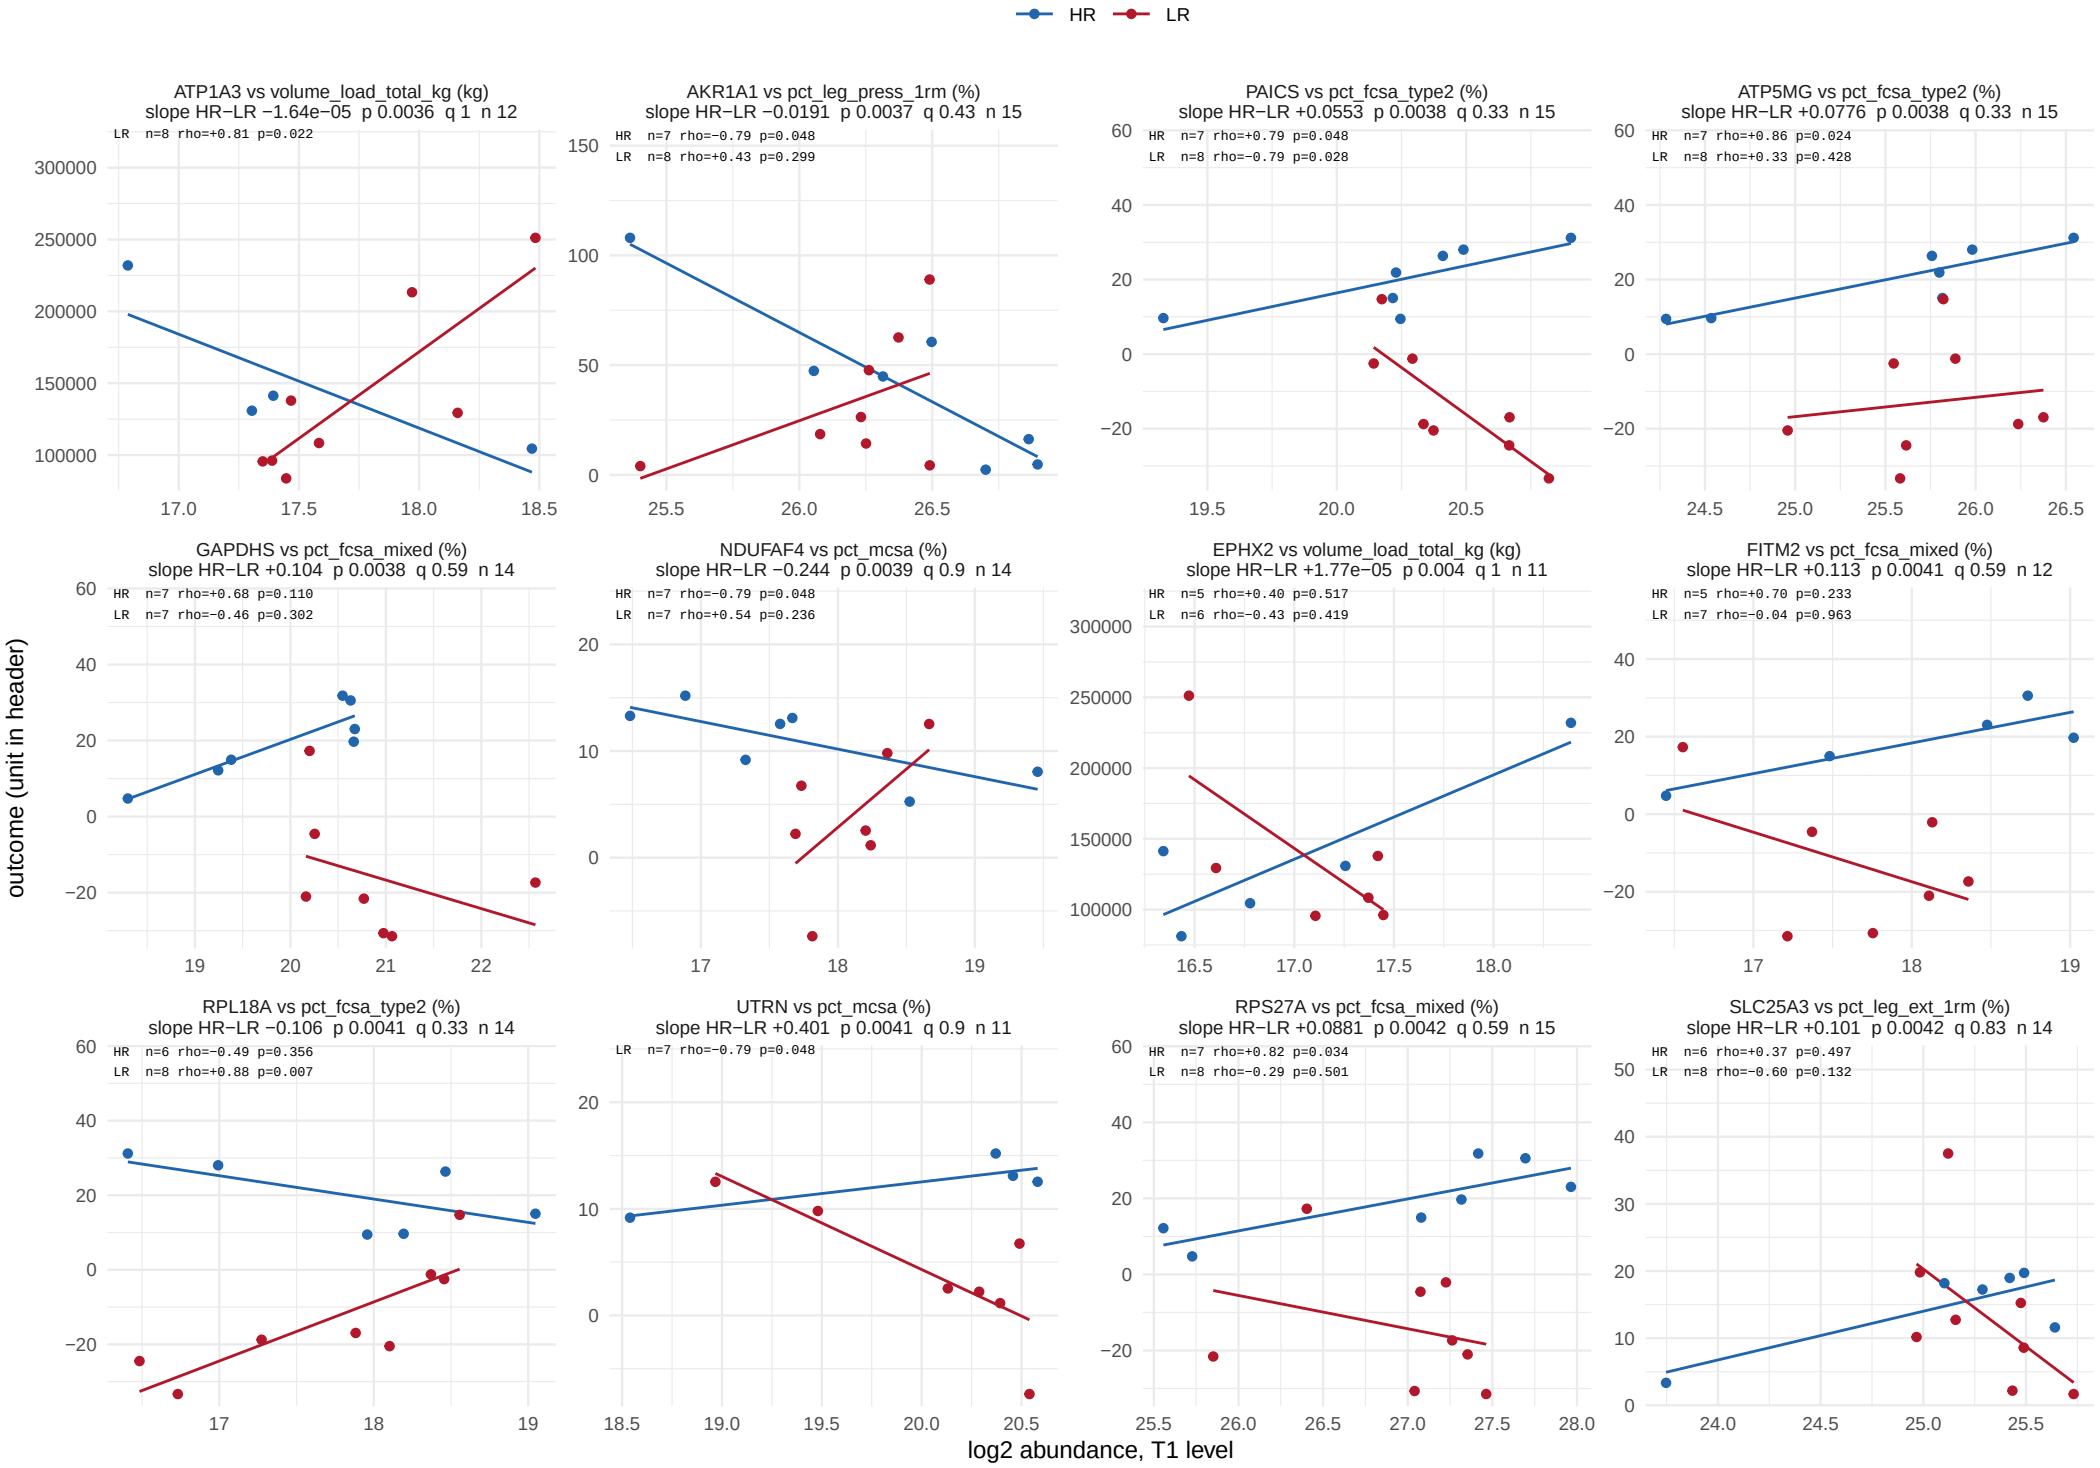

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window

721 of 12553 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 6 of 61.

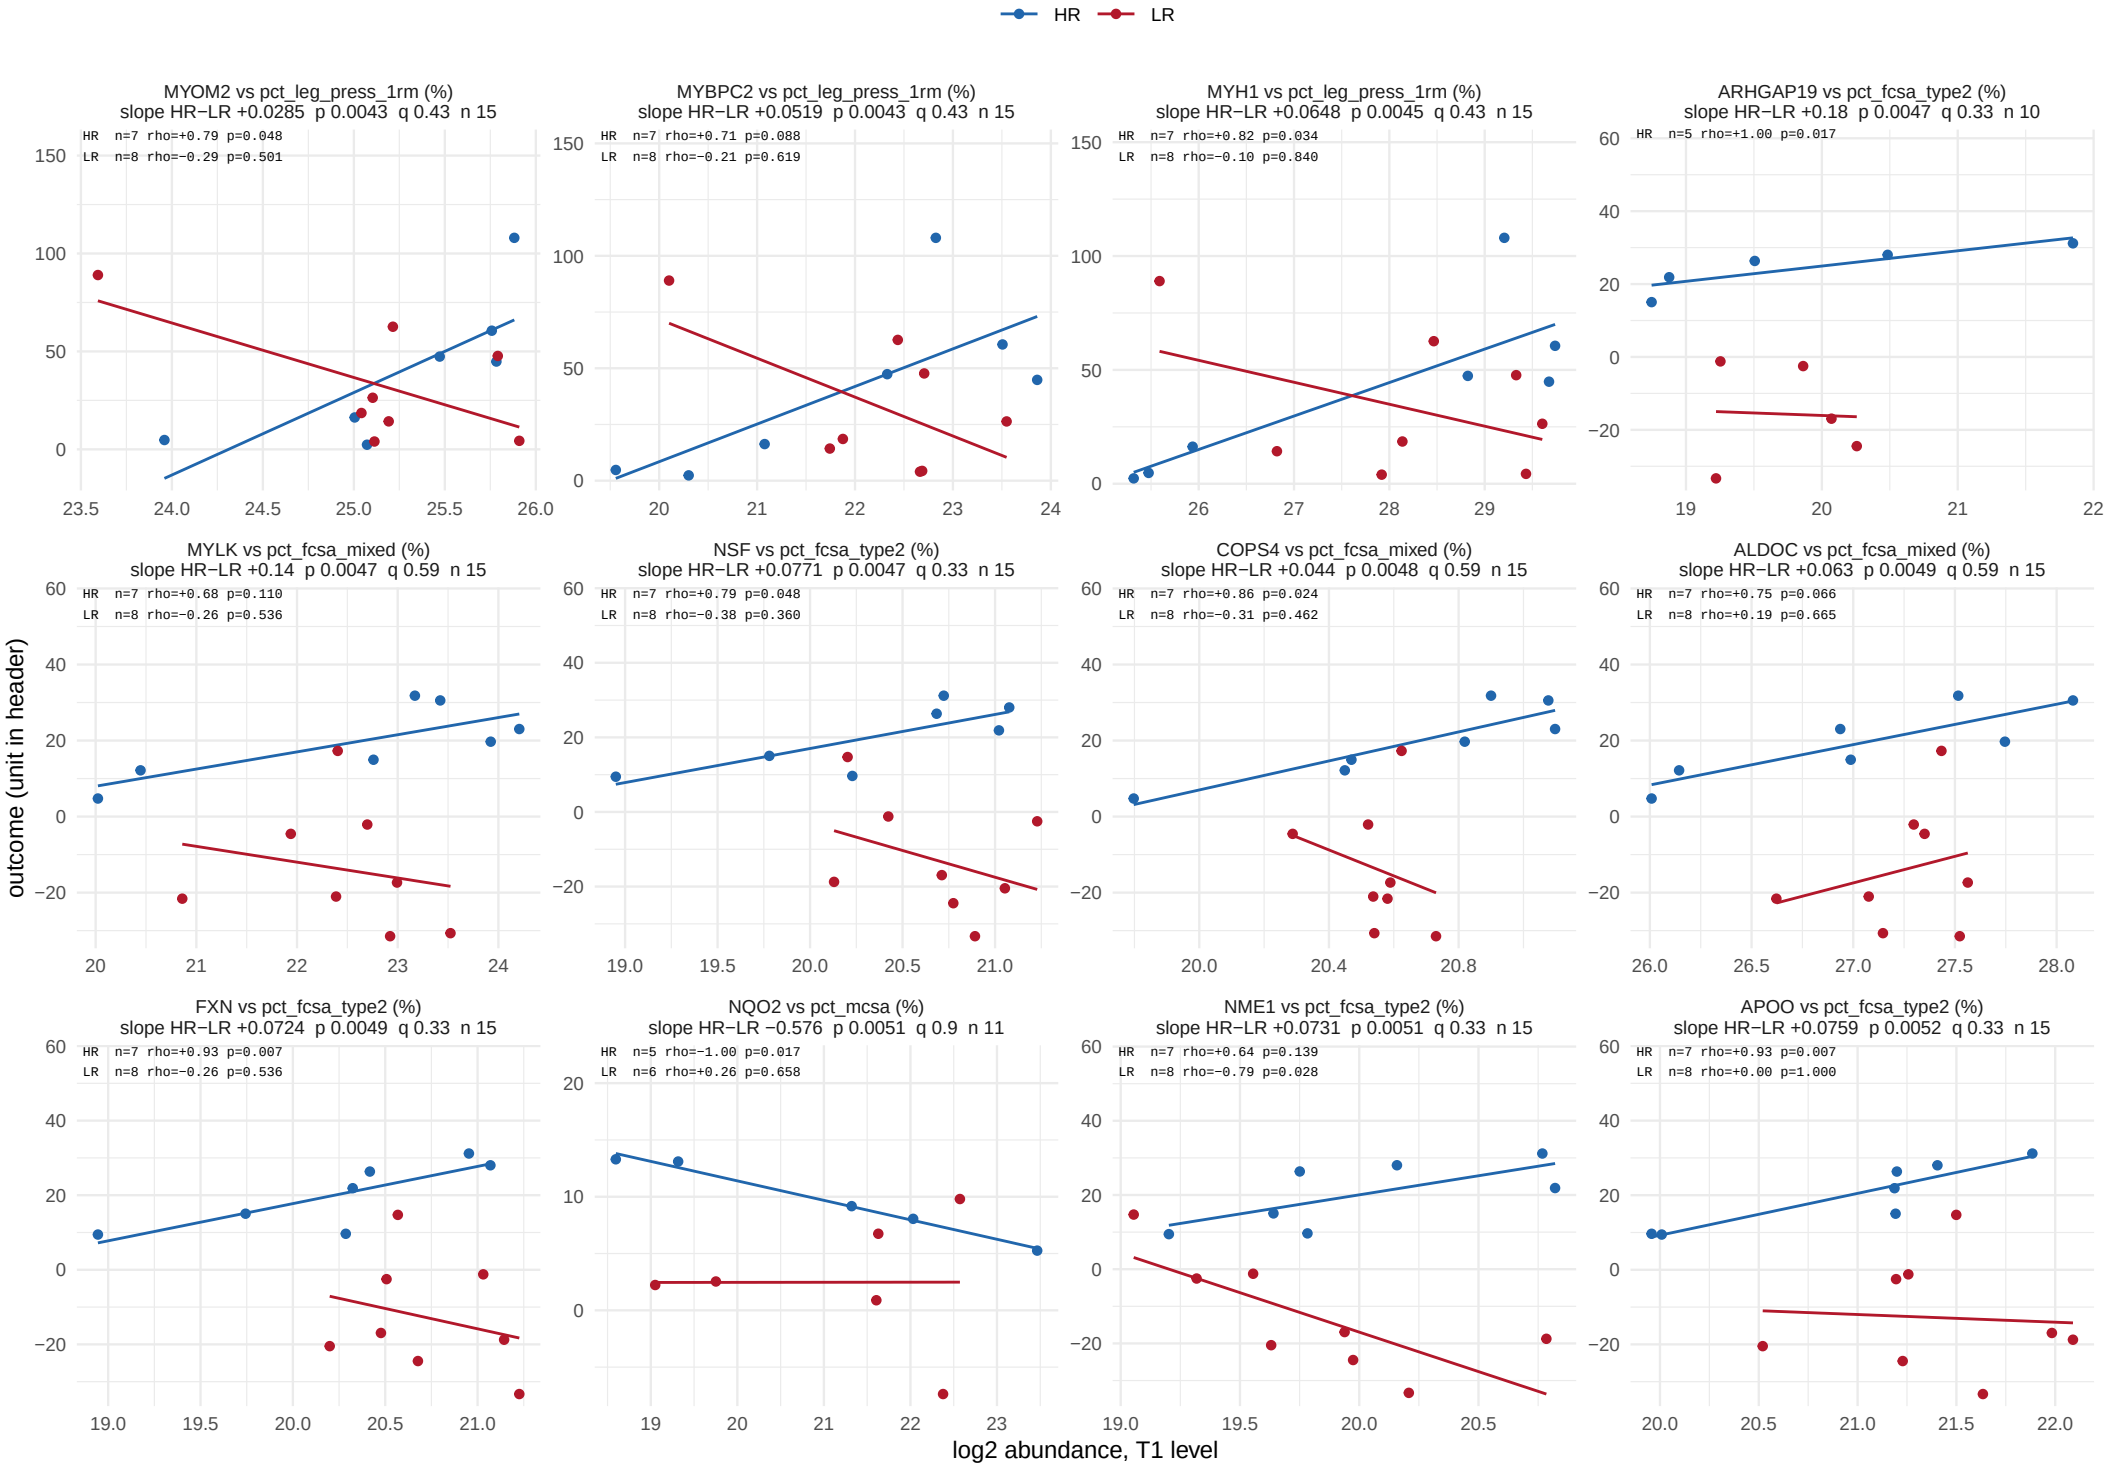

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


721 of 12553 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 7 of 61.



One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


721 of 12553 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 8 of 61.

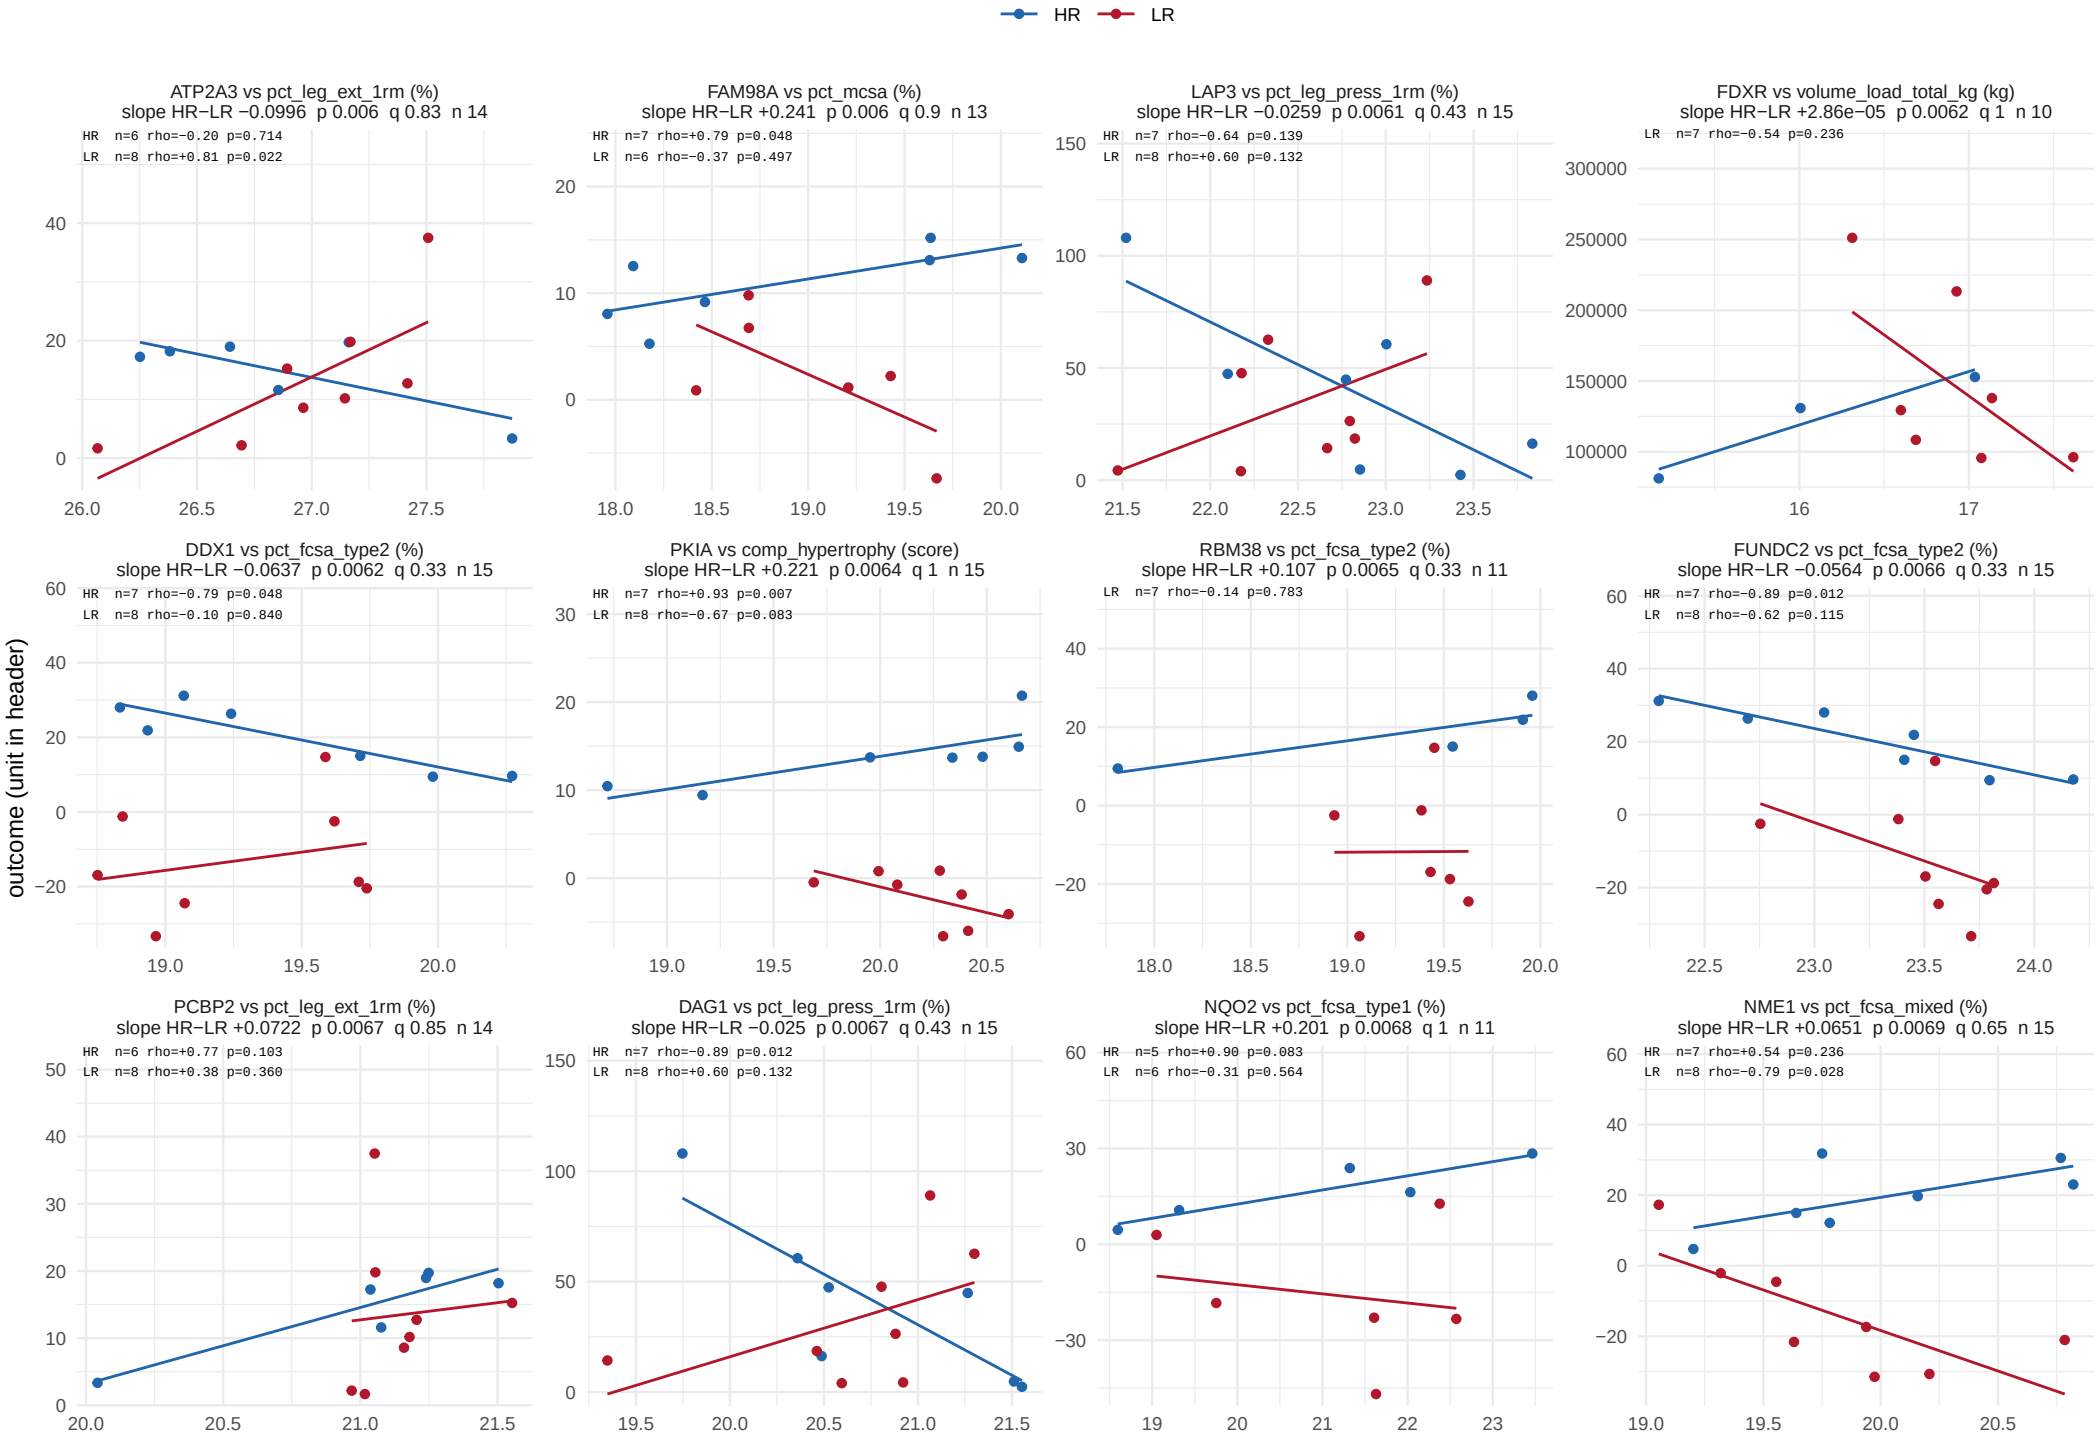

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


721 of 12553 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 9 of 61.

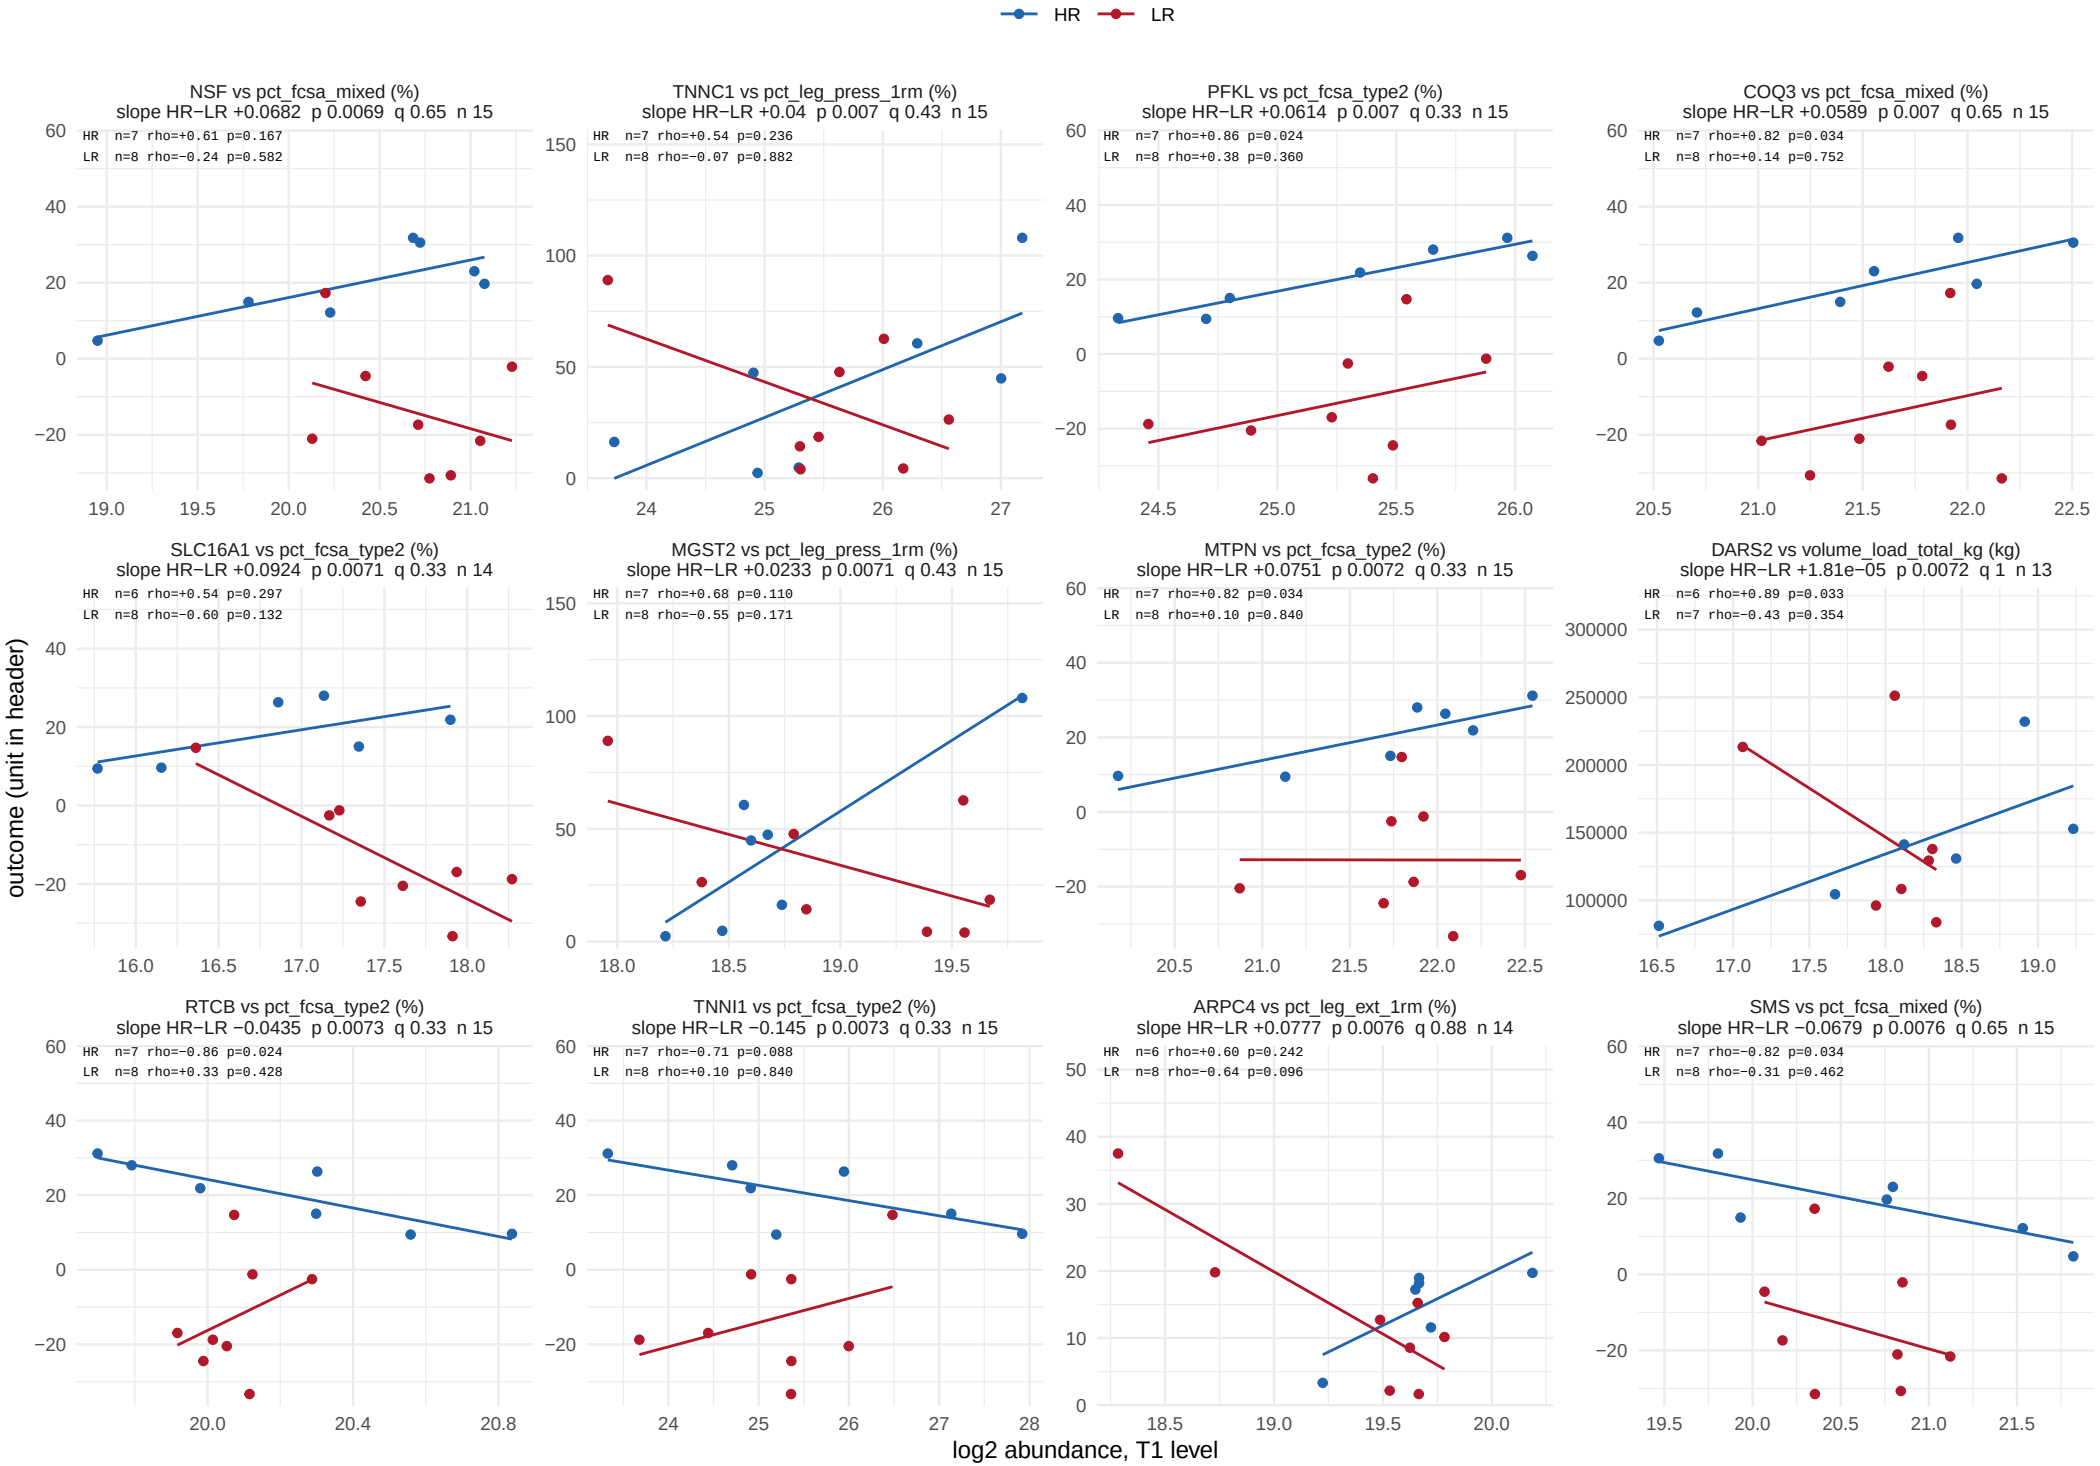

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window

721 of 12553 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 10 of 61.

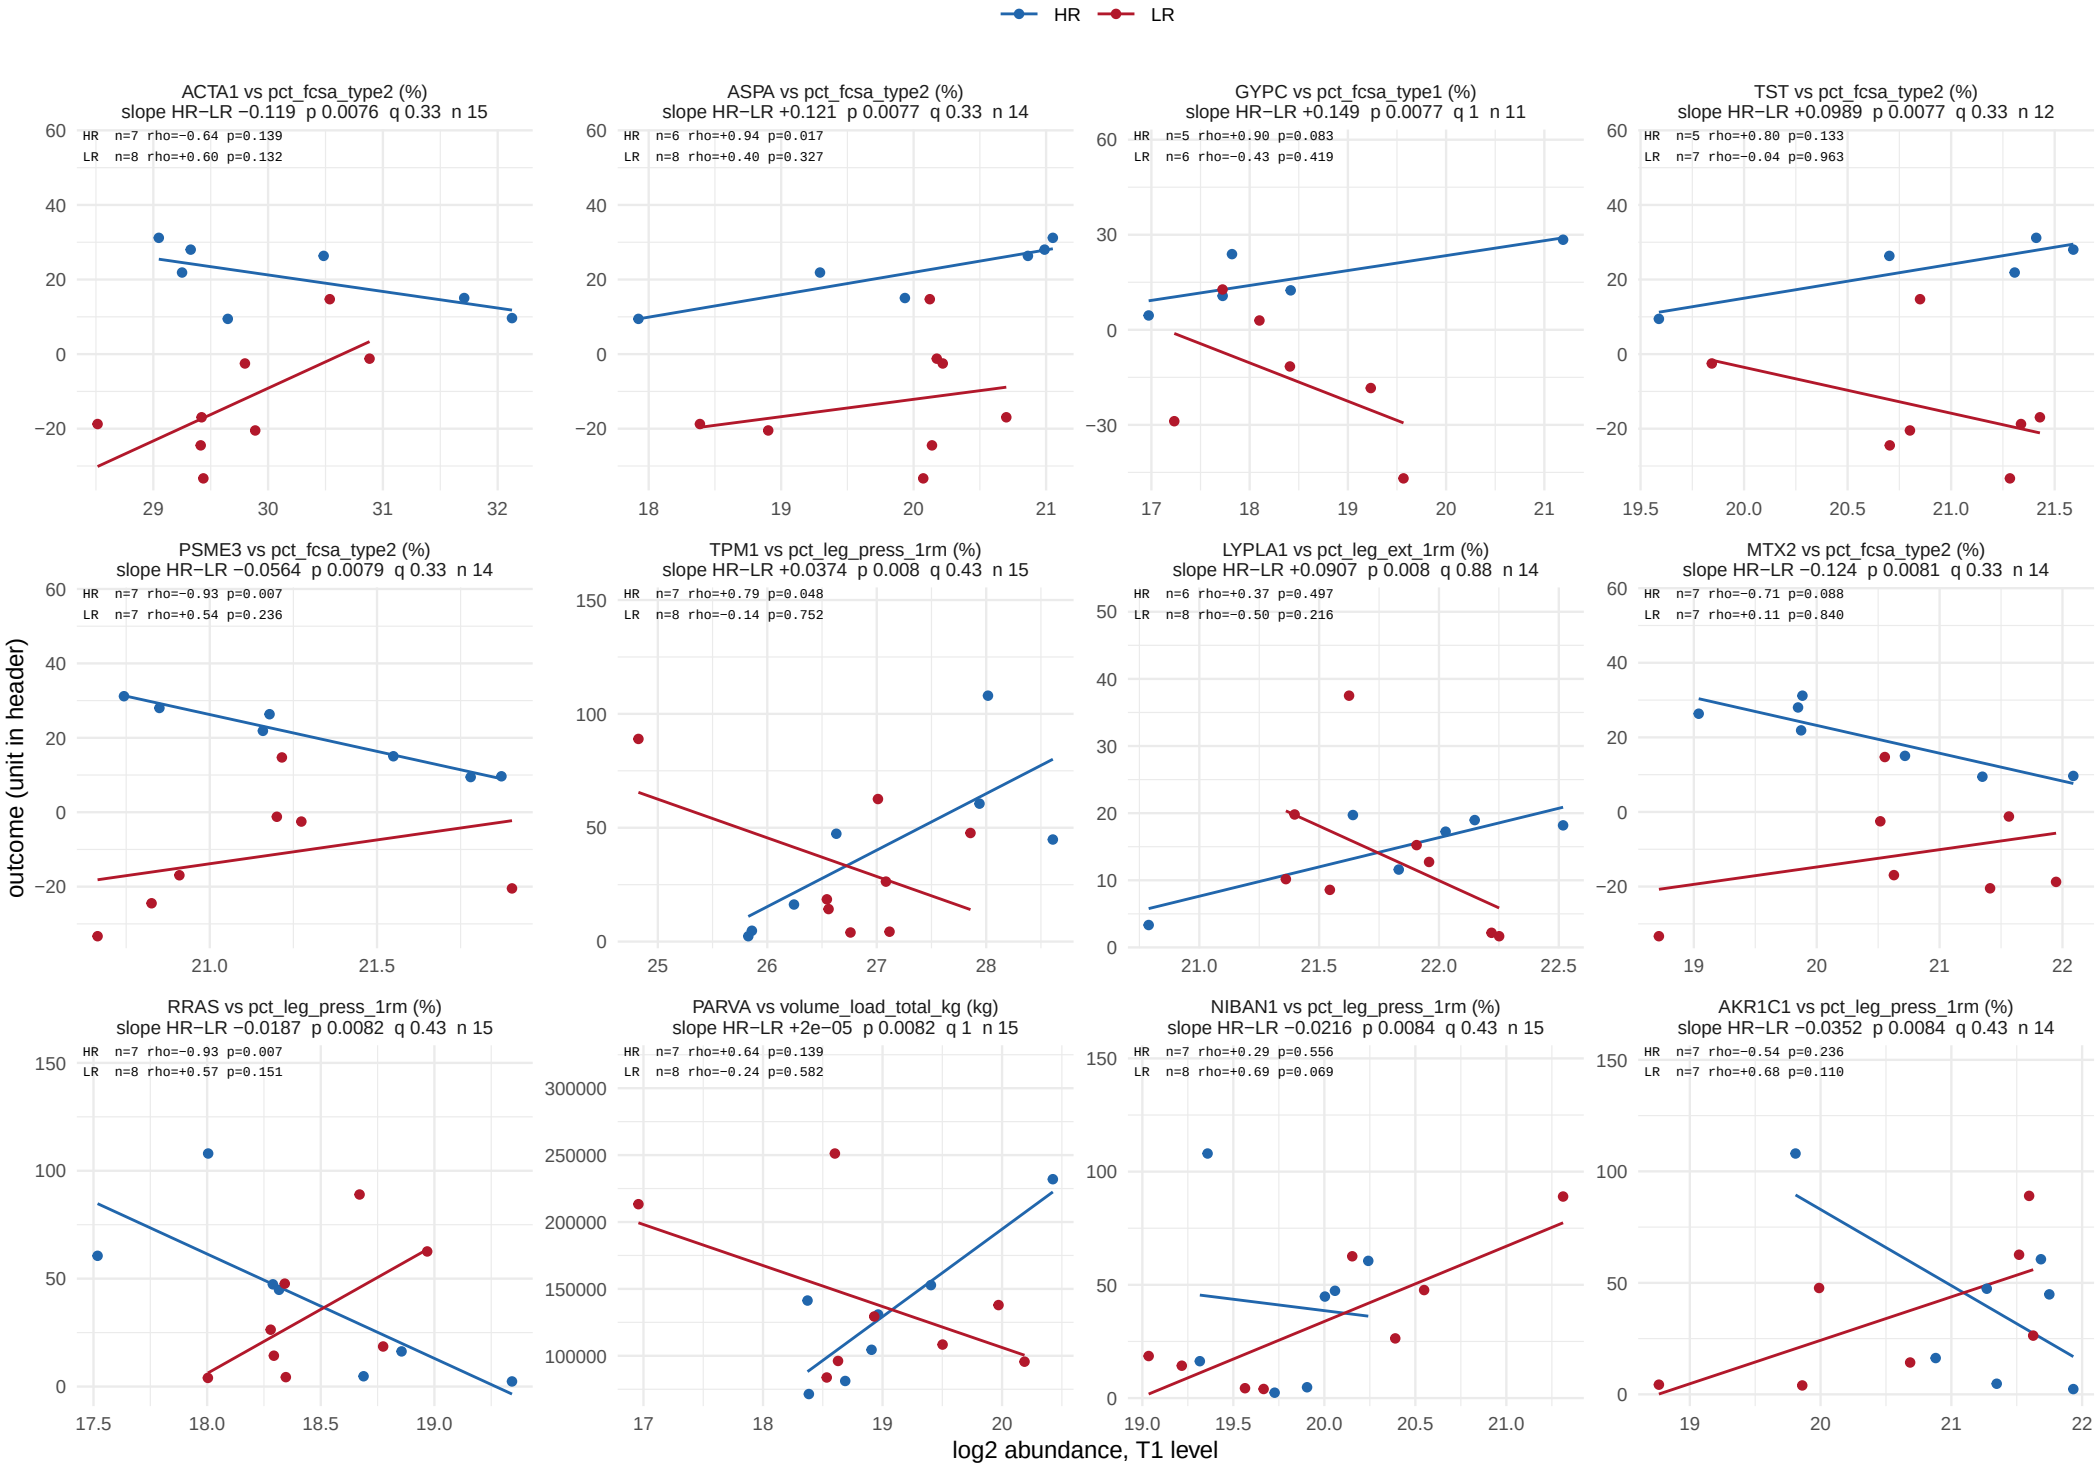

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


721 of 12553 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 11 of 61.



One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


721 of 12553 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 12 of 61.

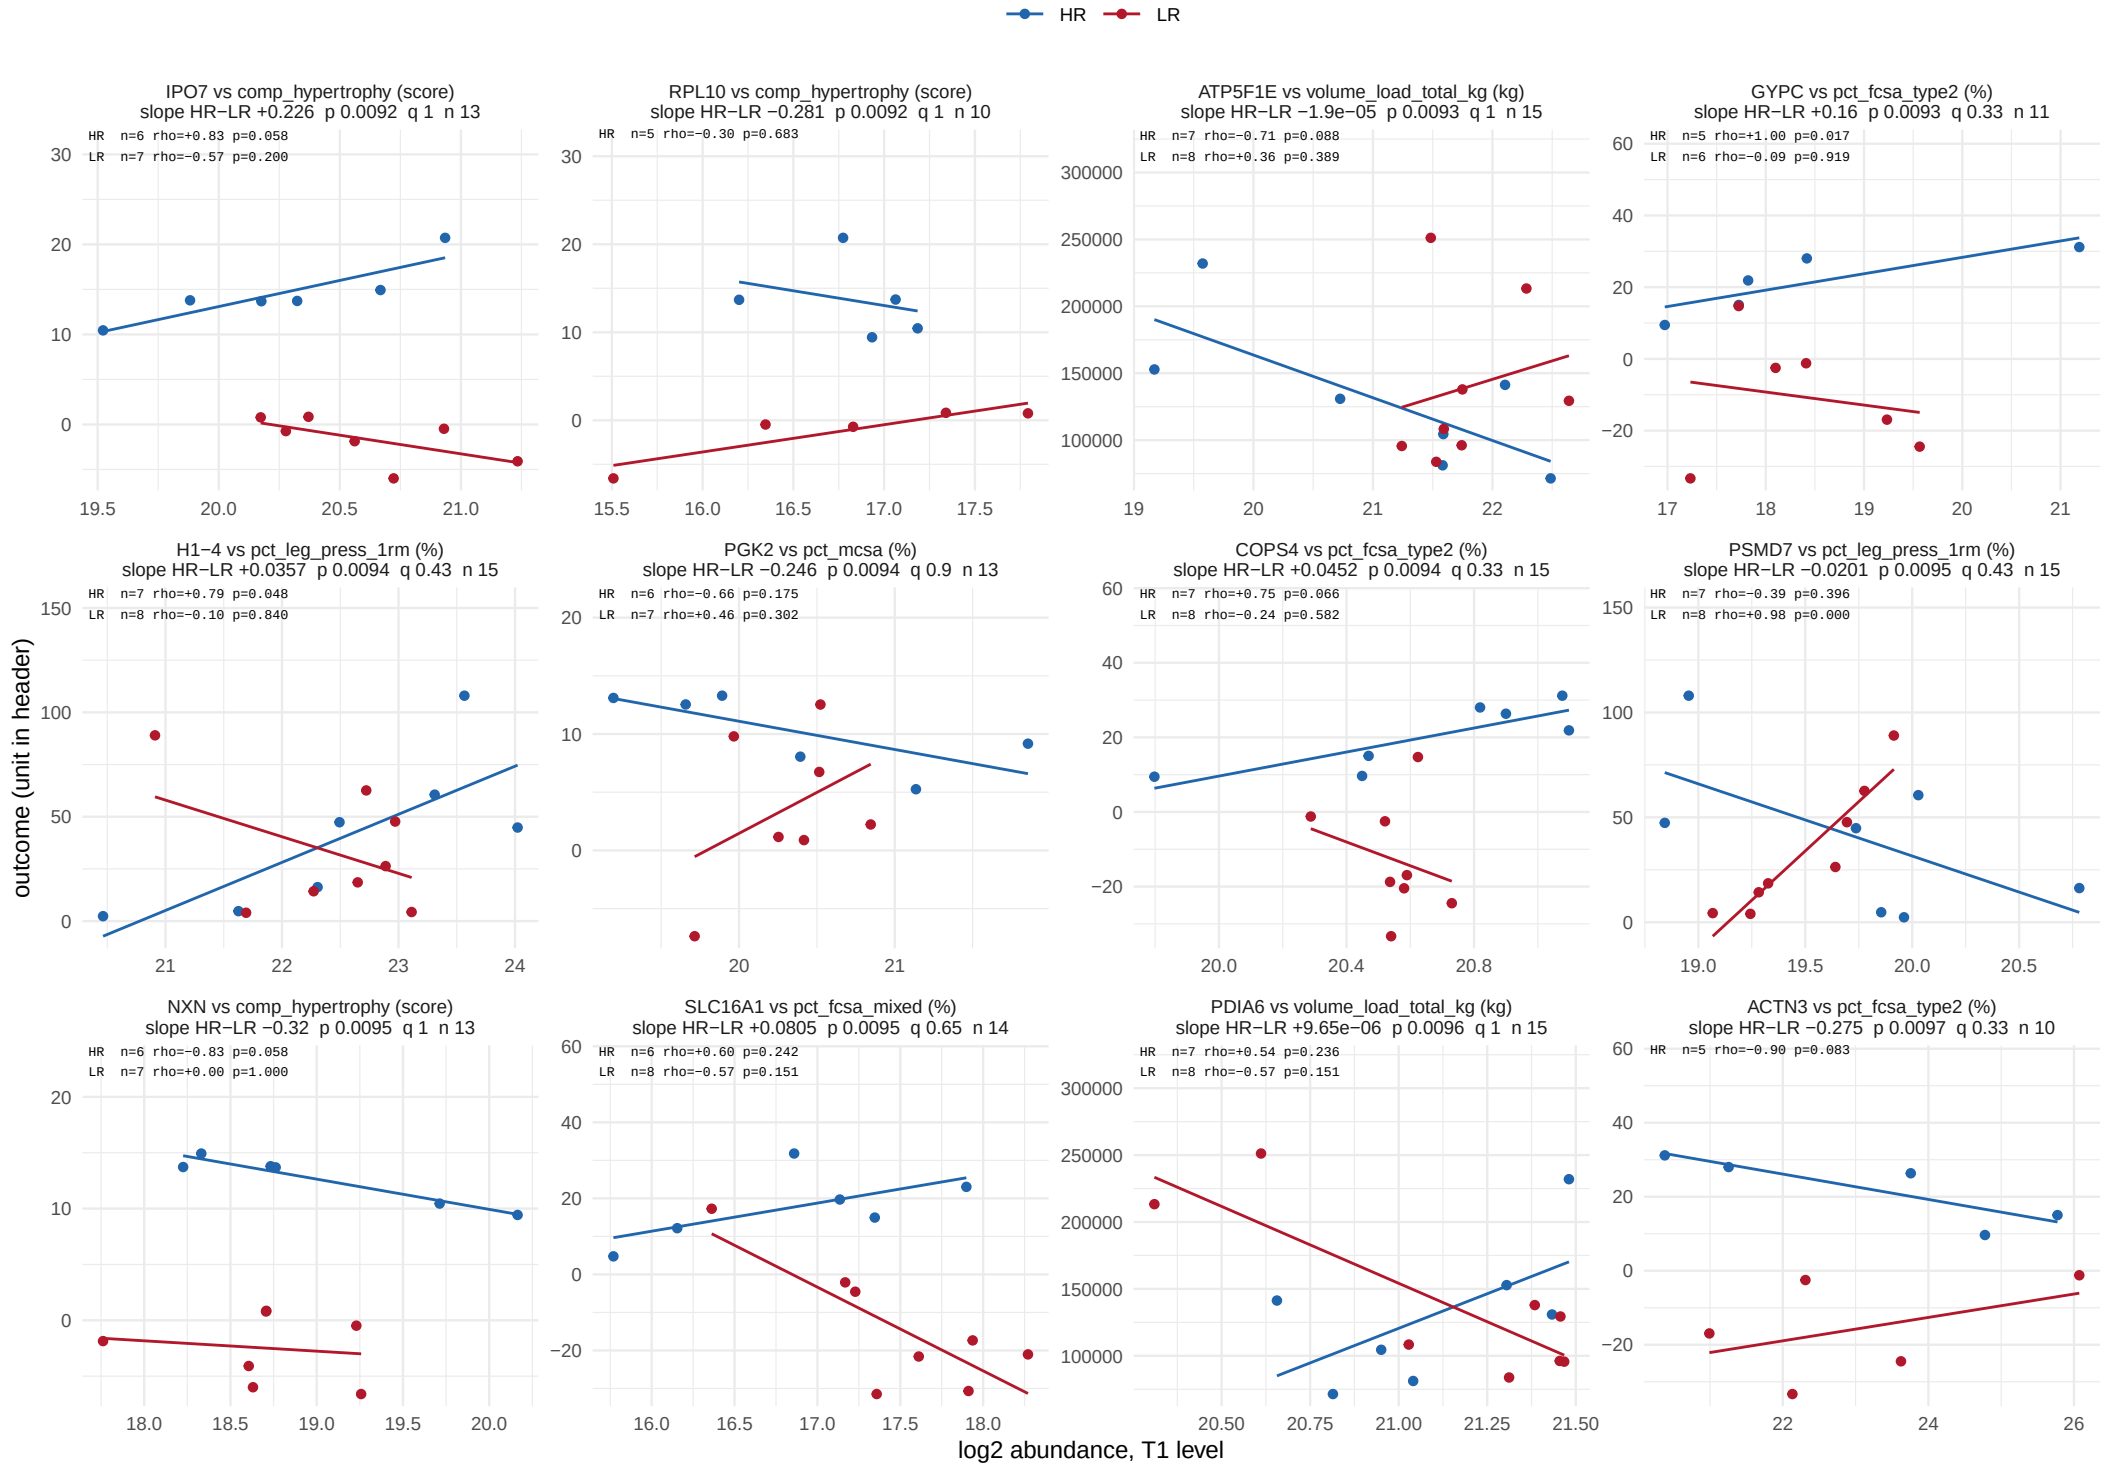

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


721 of 12553 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 13 of 61.

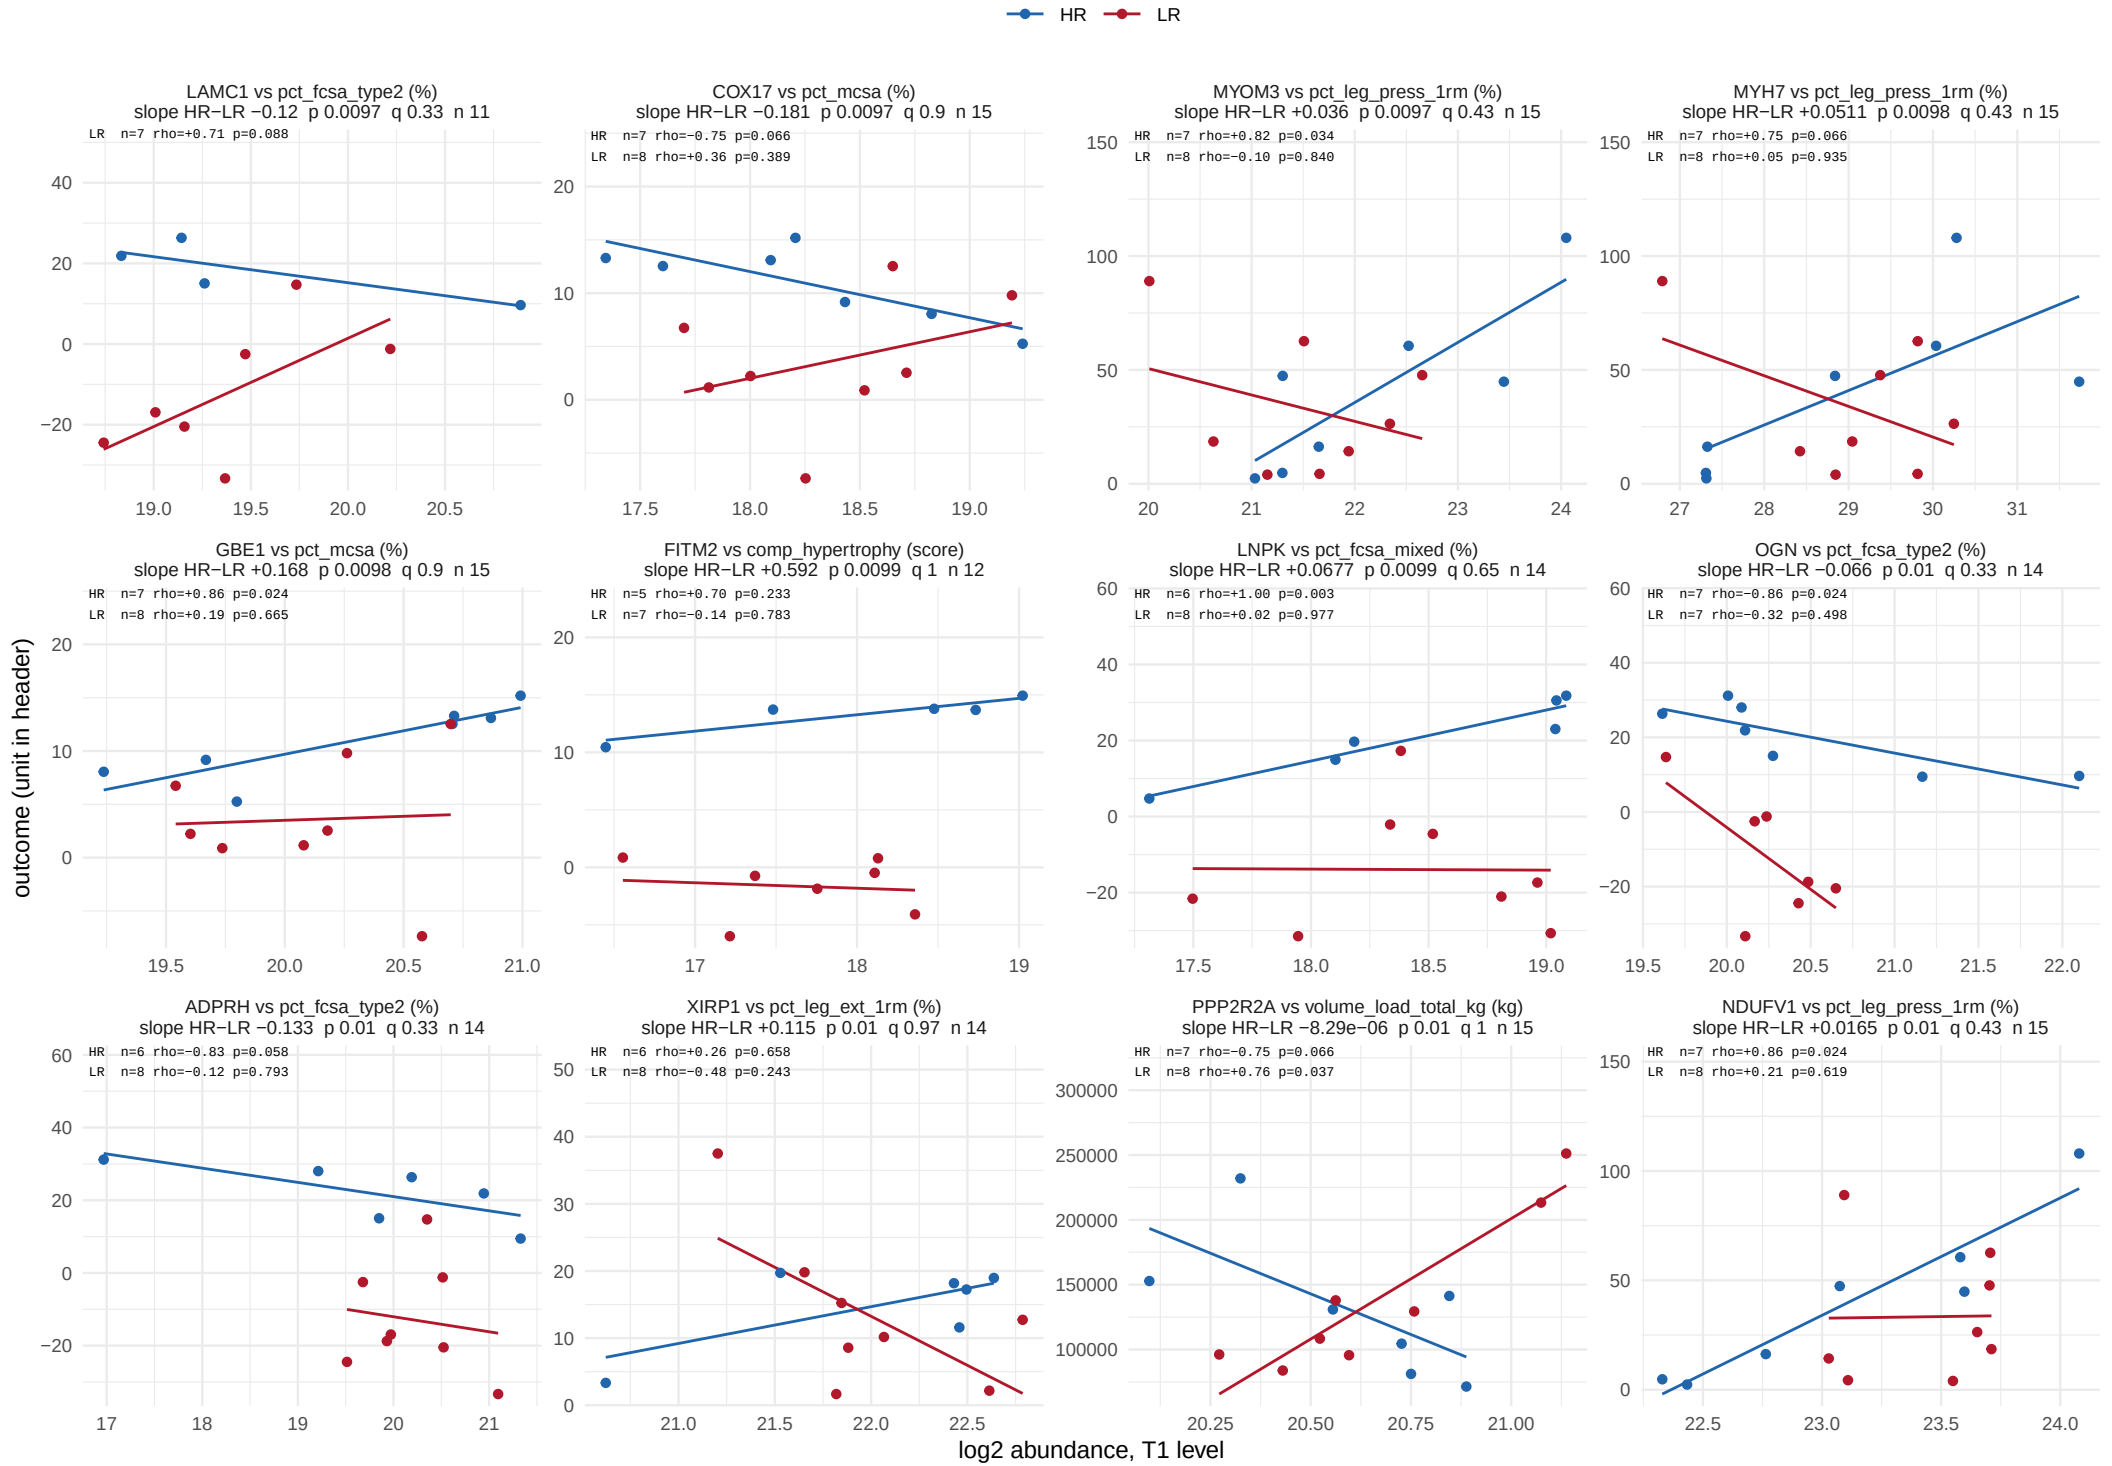

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


721 of 12553 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 14 of 61.

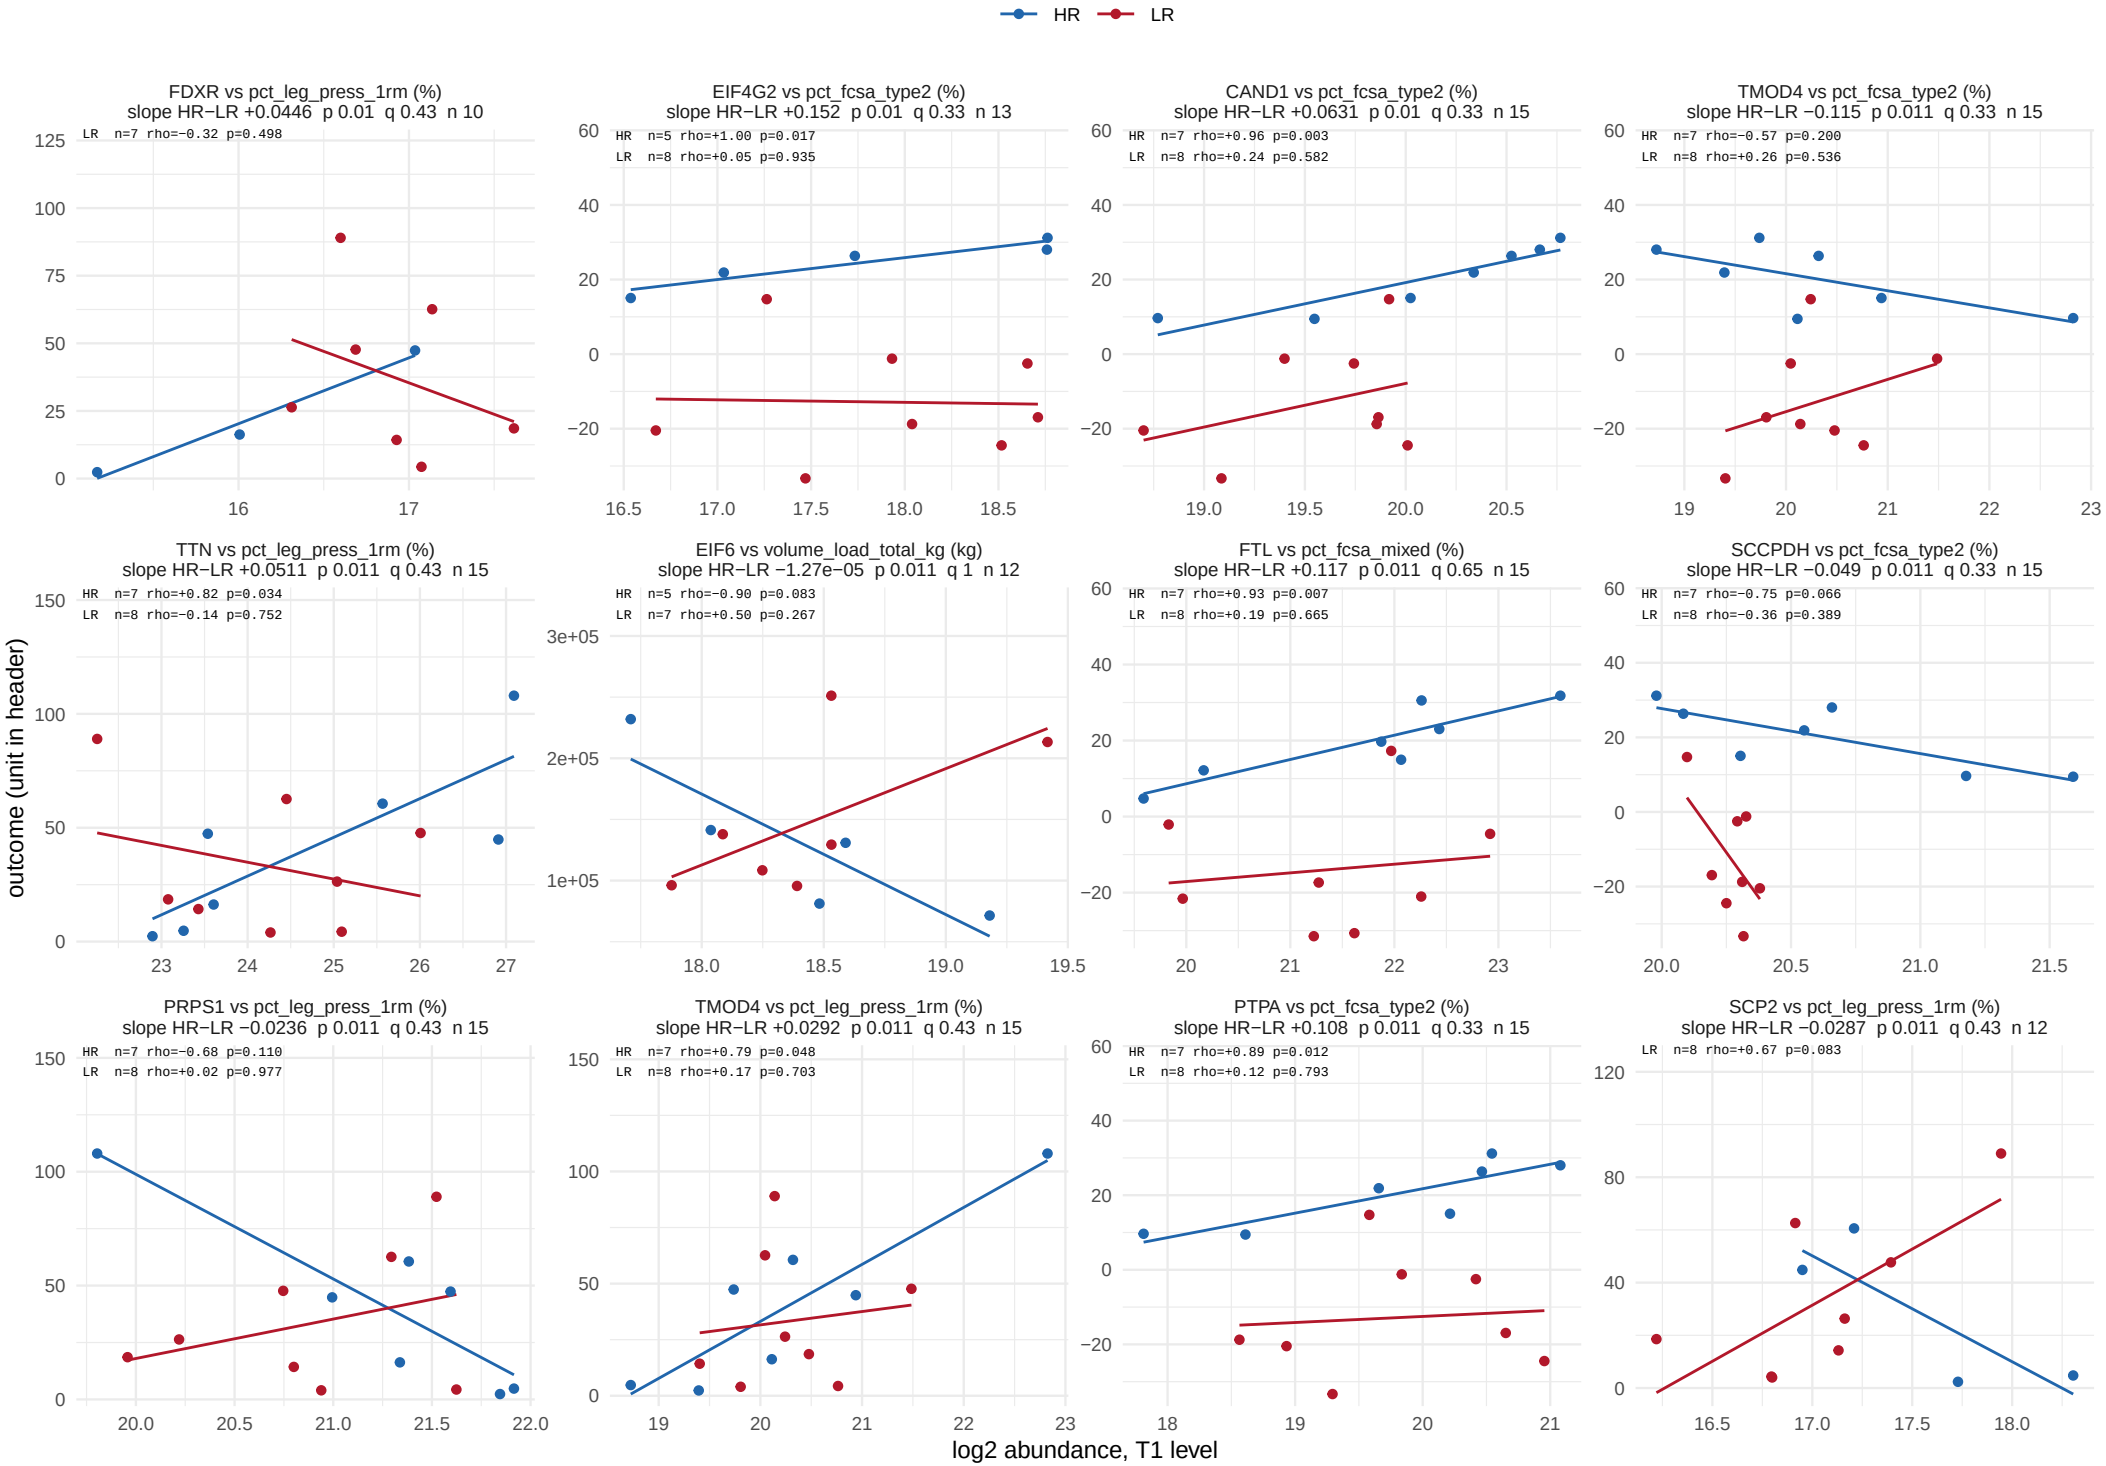

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


721 of 12553 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 15 of 61.

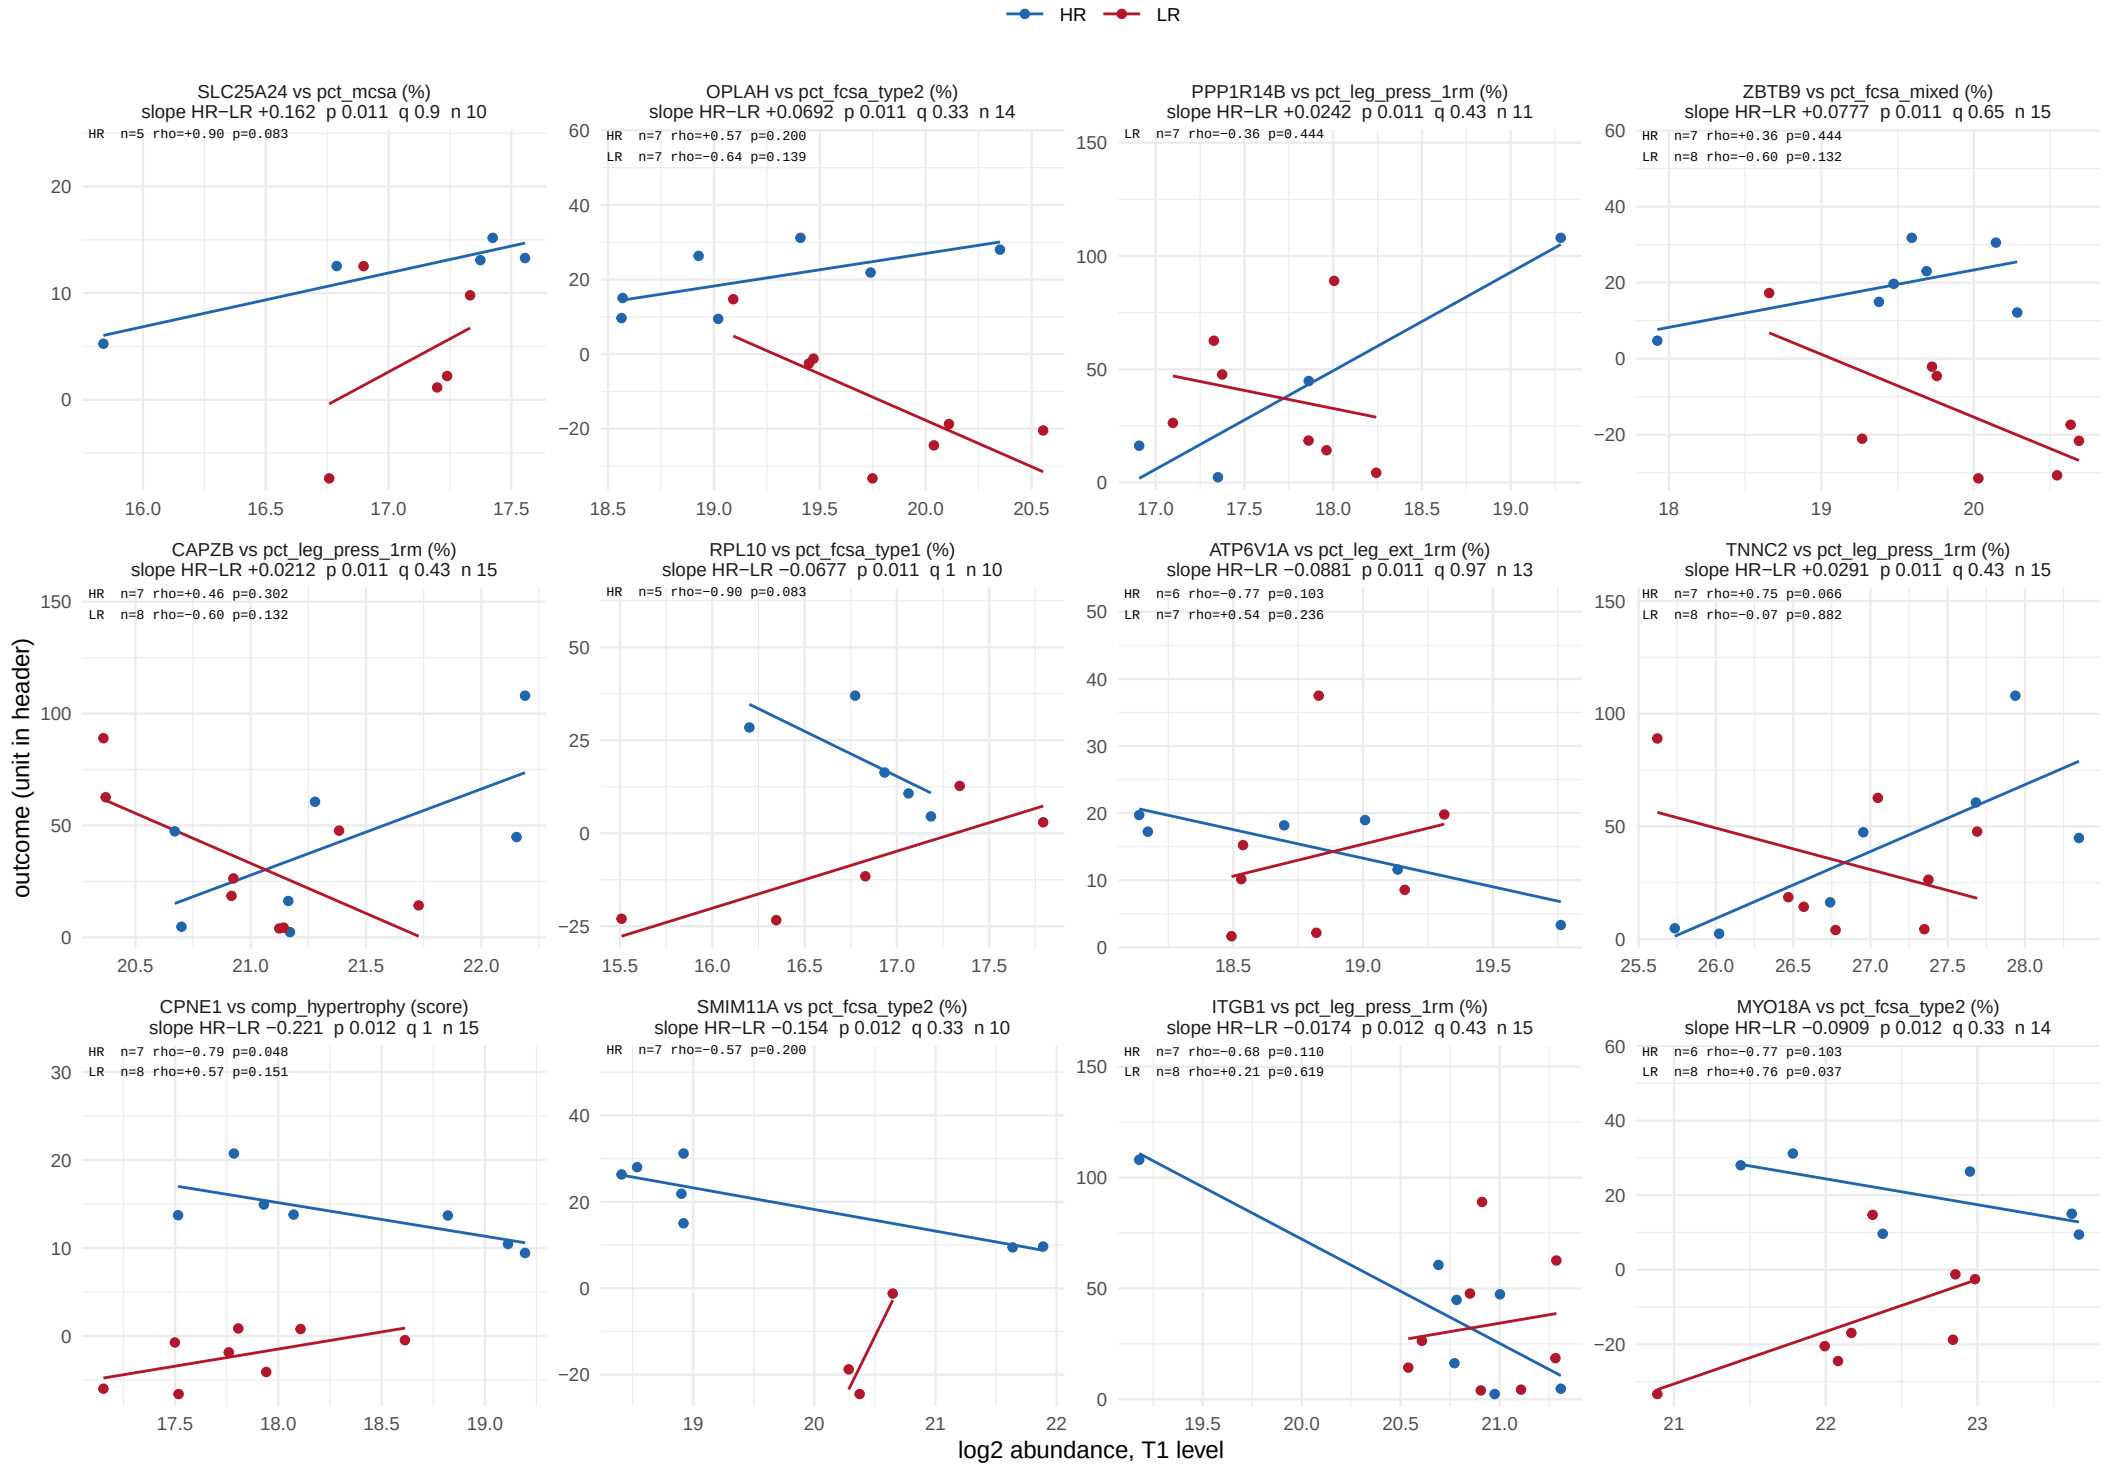

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


721 of 12553 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 16 of 61.

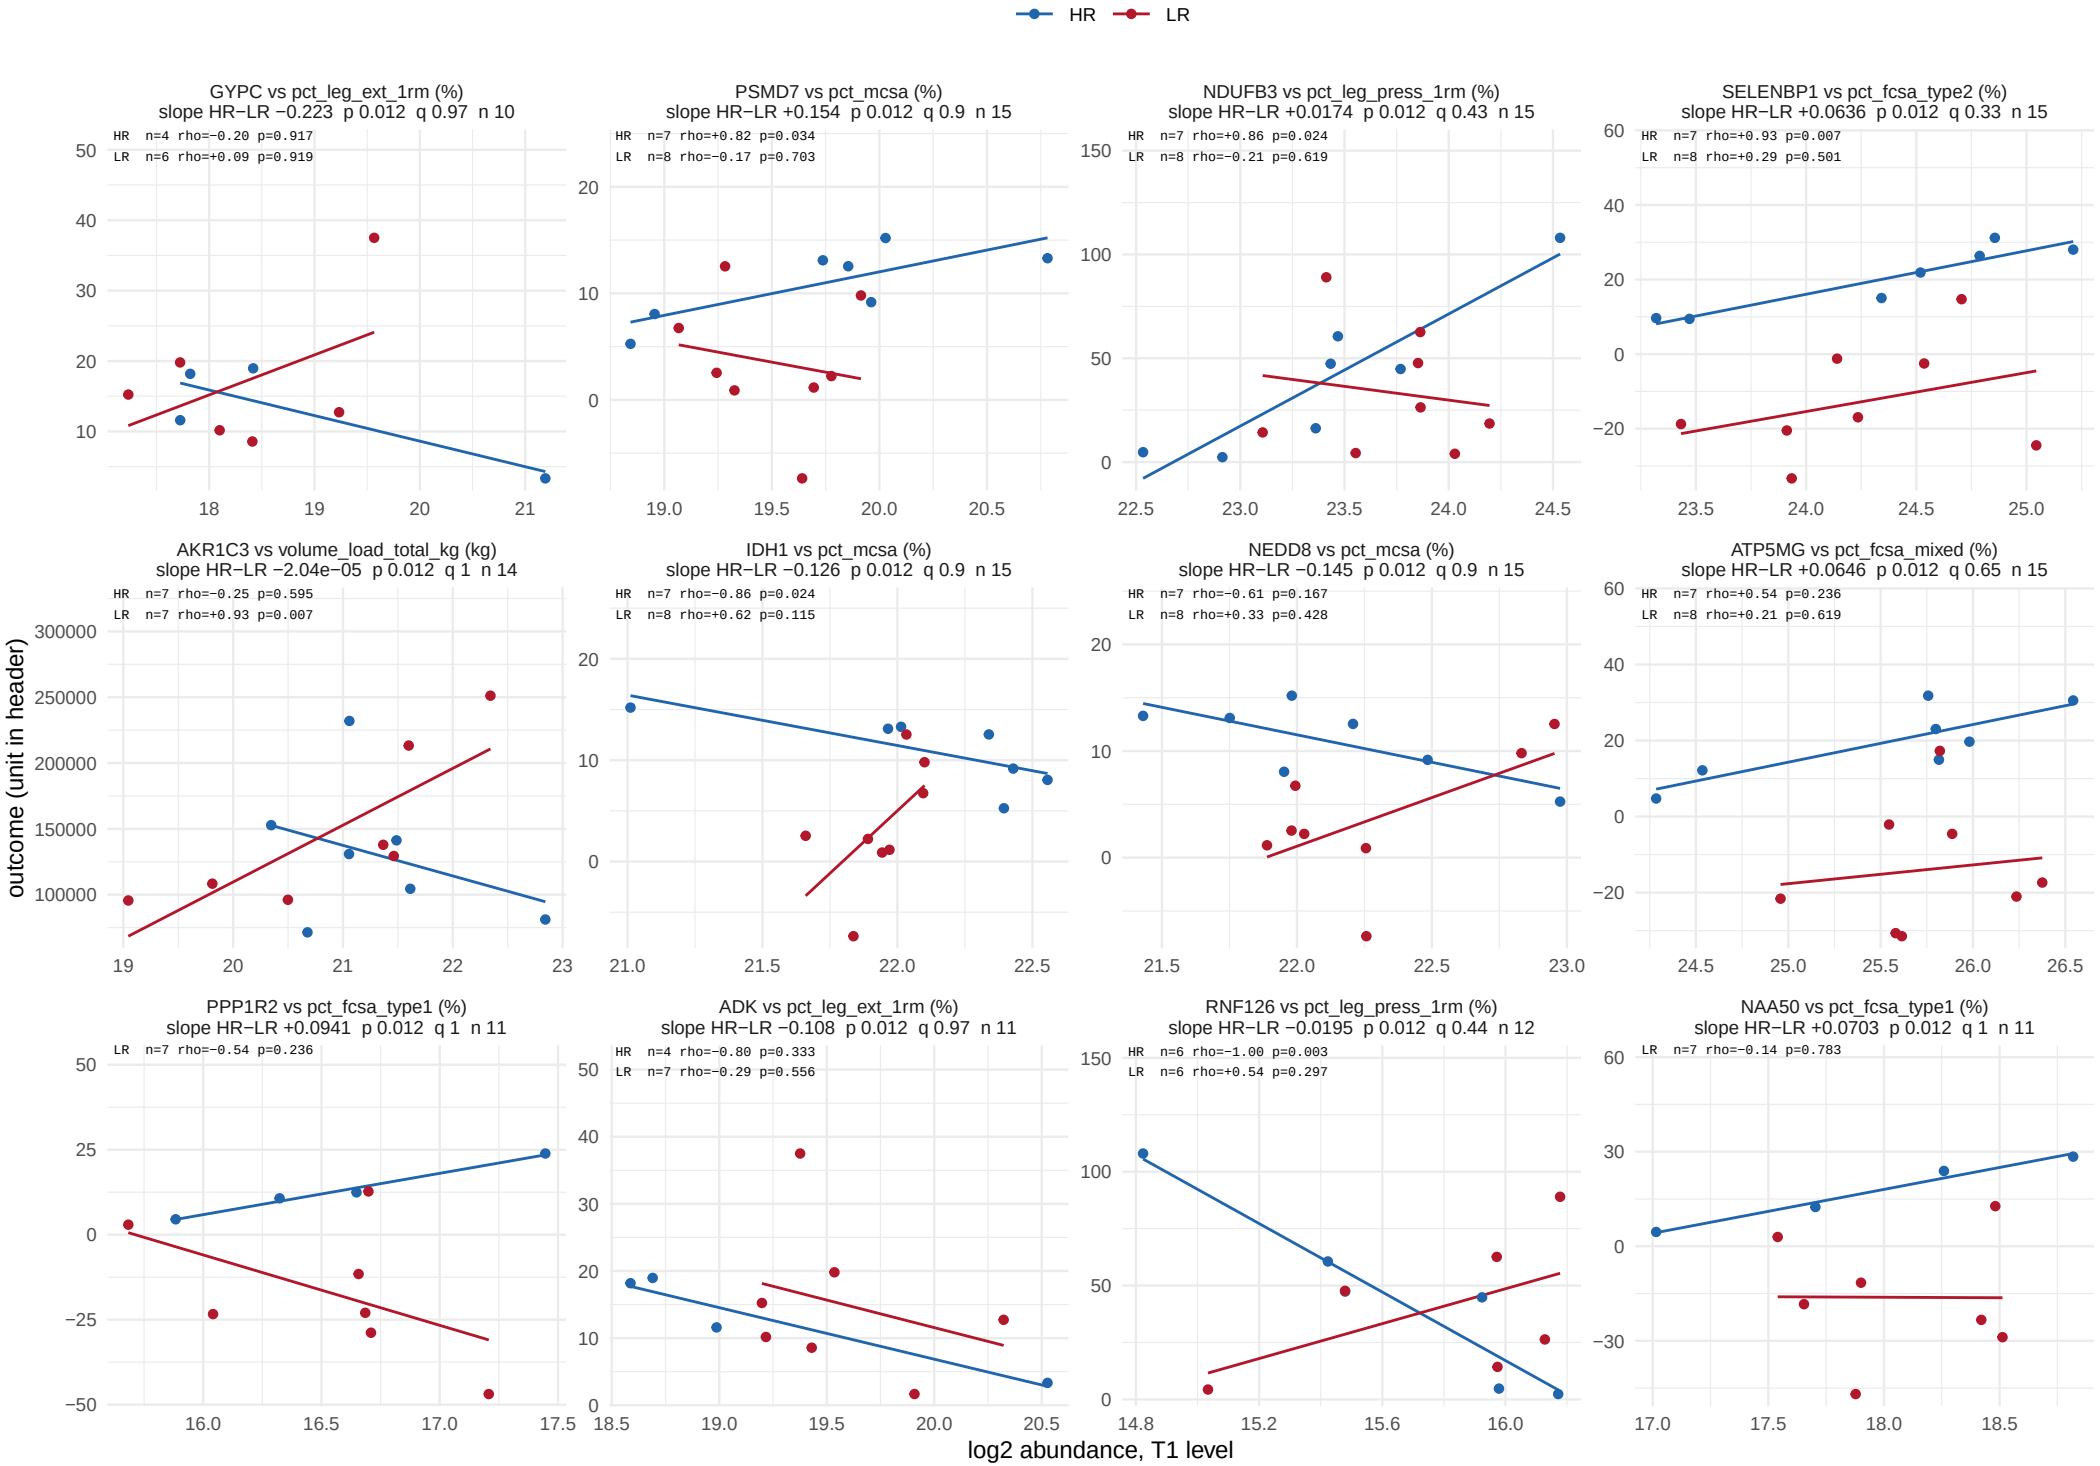

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


721 of 12553 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 17 of 61.

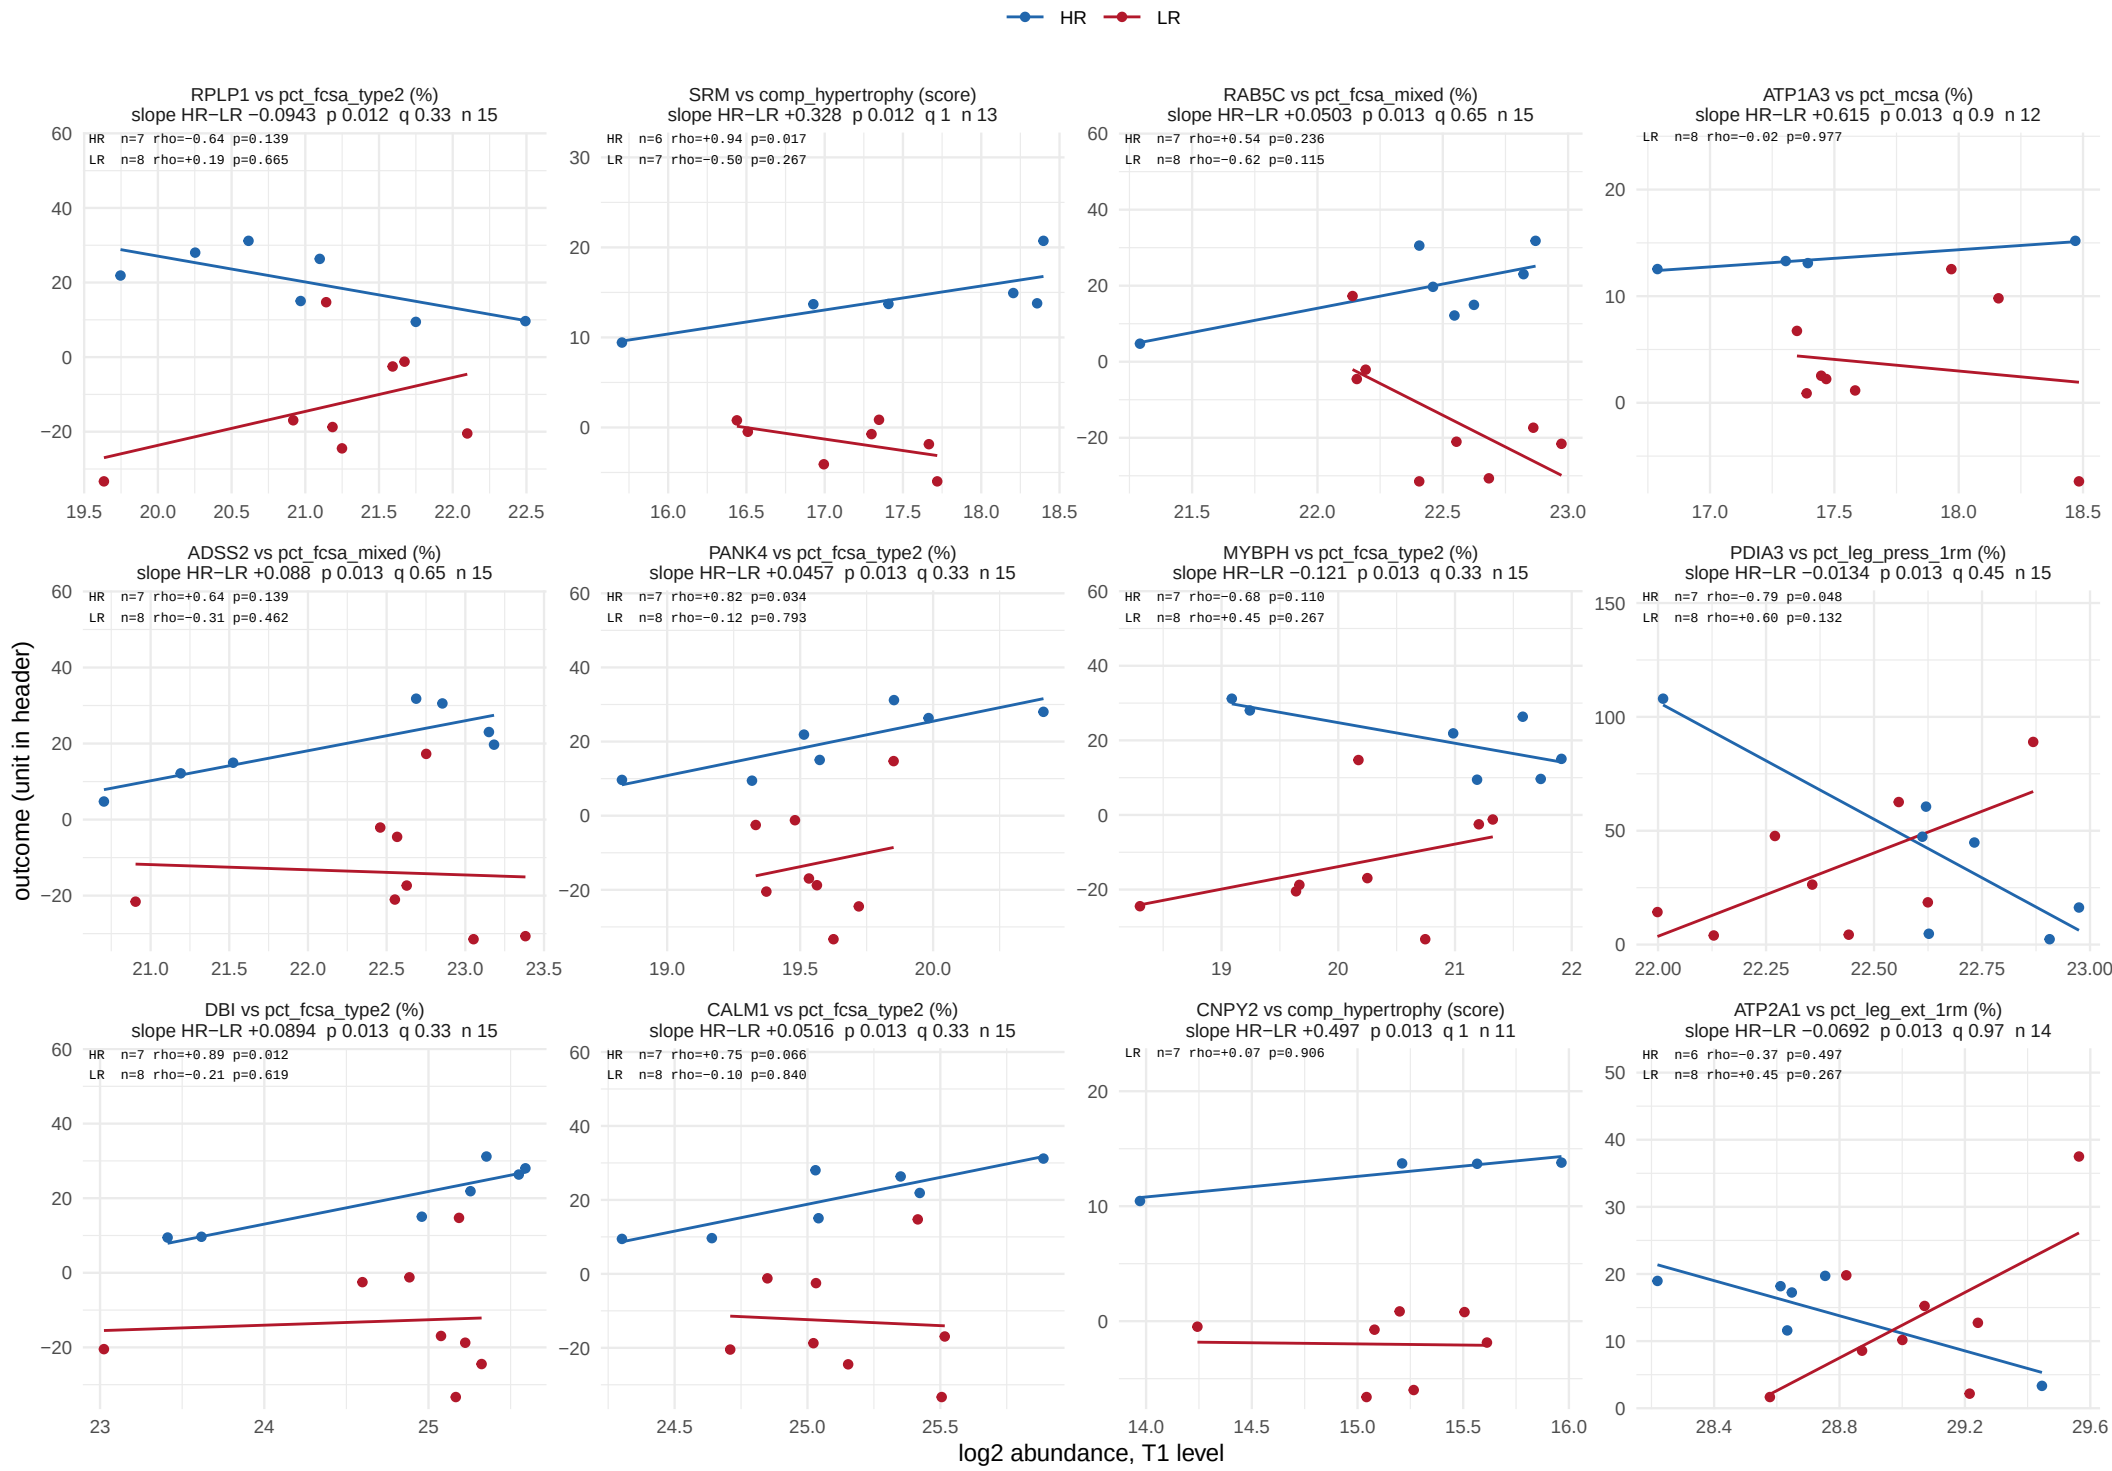

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


721 of 12553 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 18 of 61.

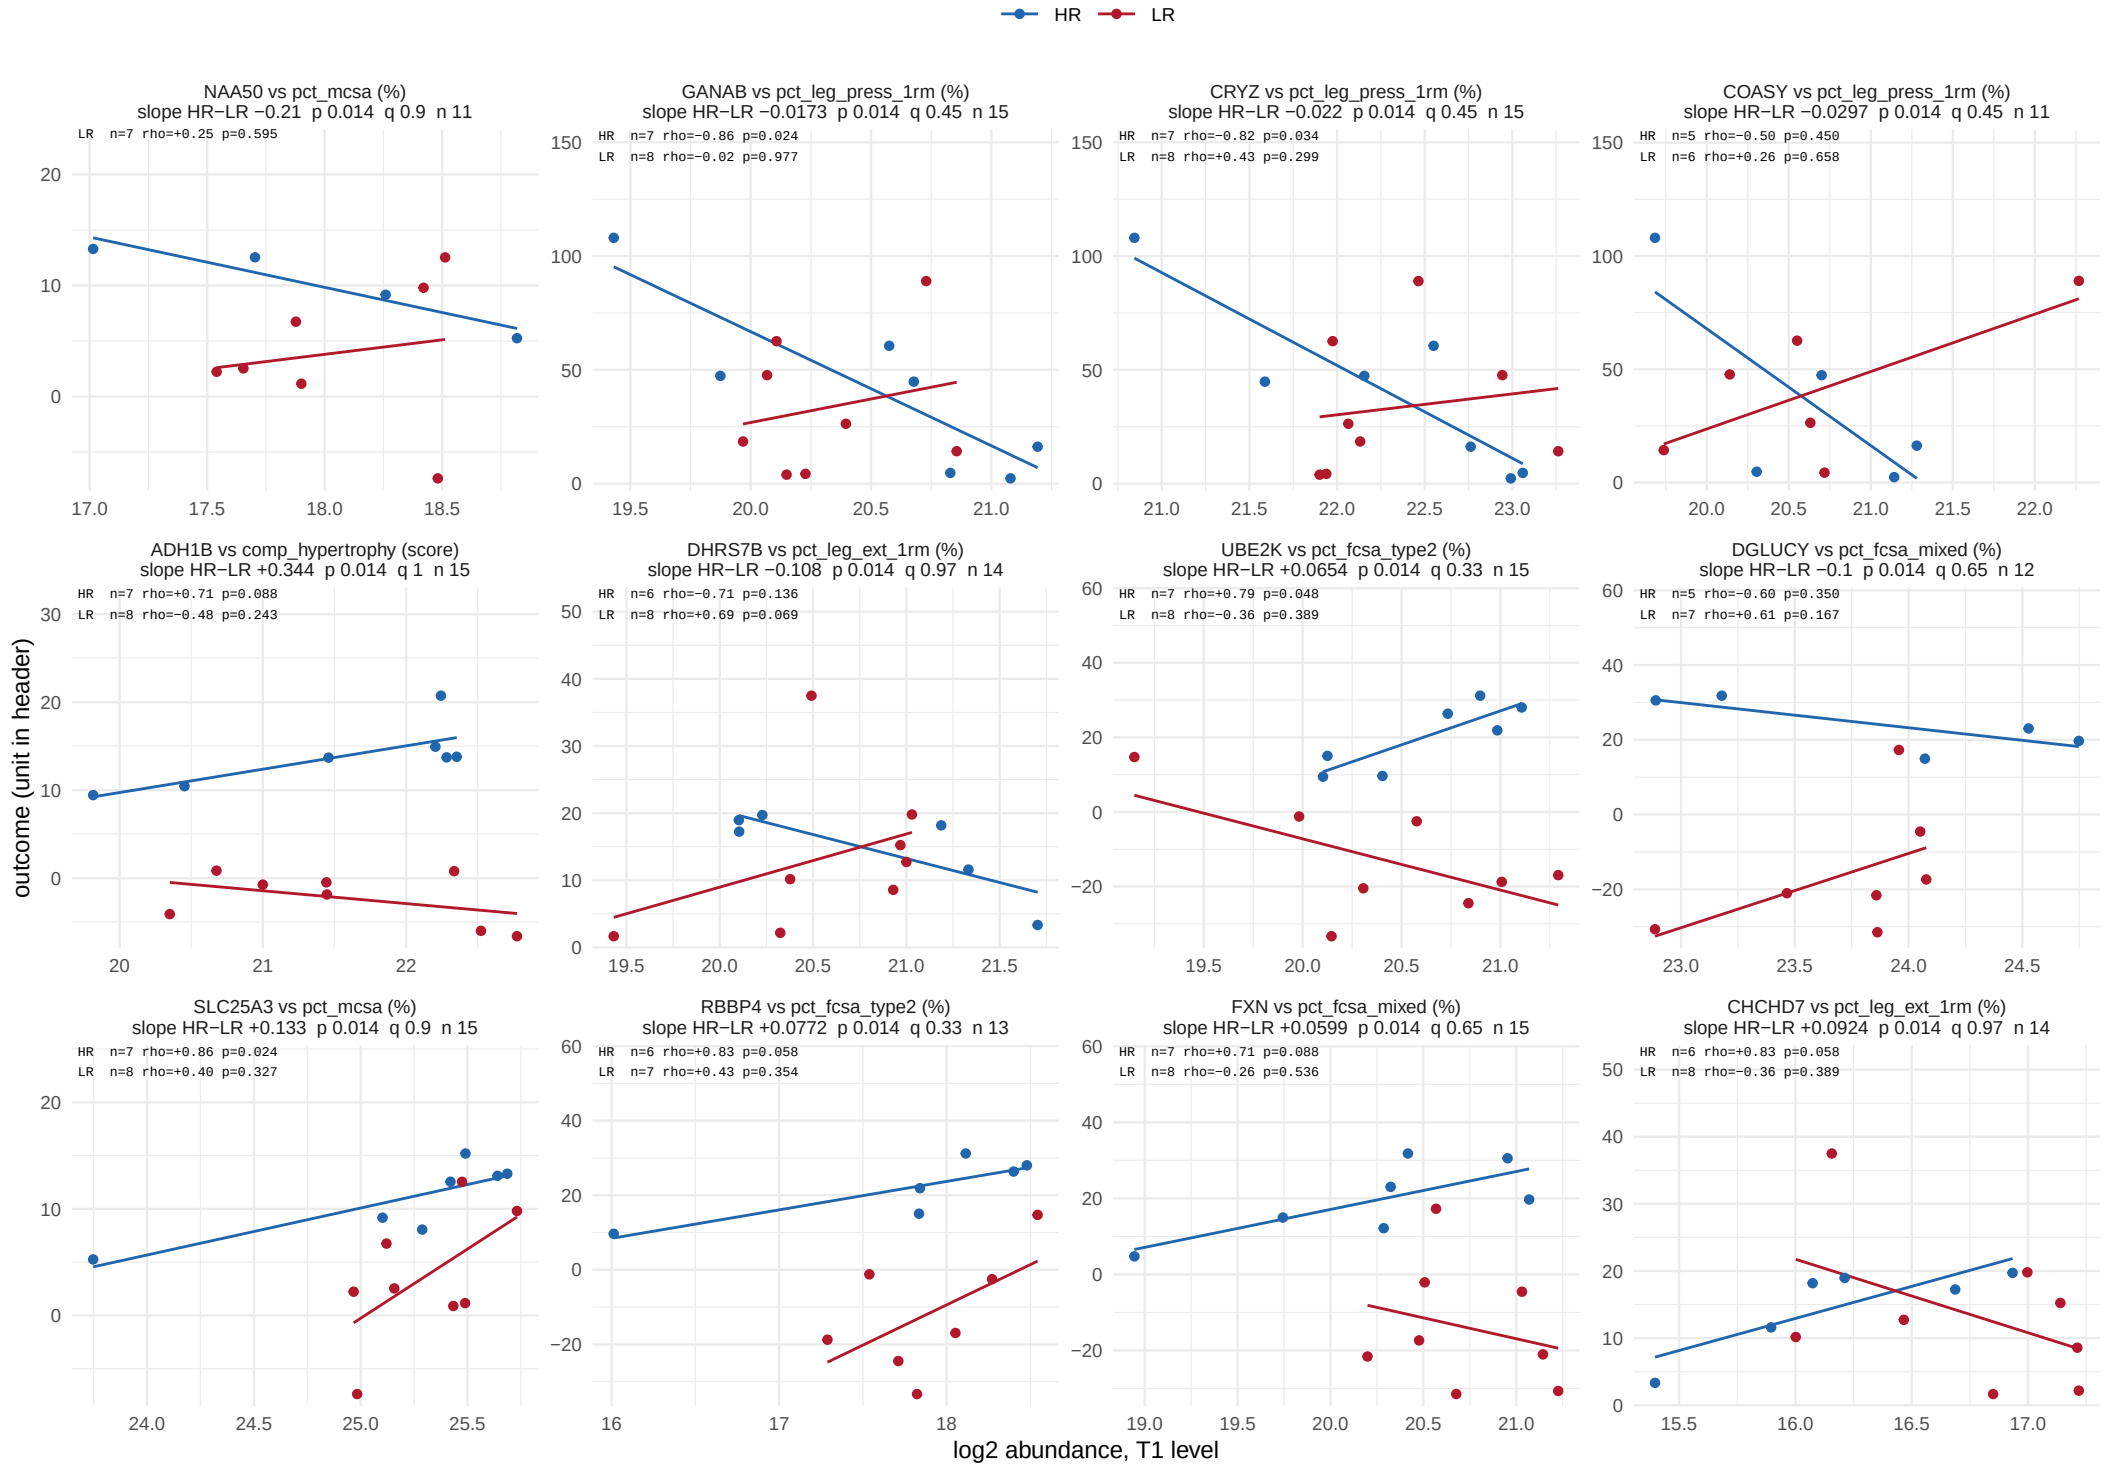

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


721 of 12553 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 19 of 61.

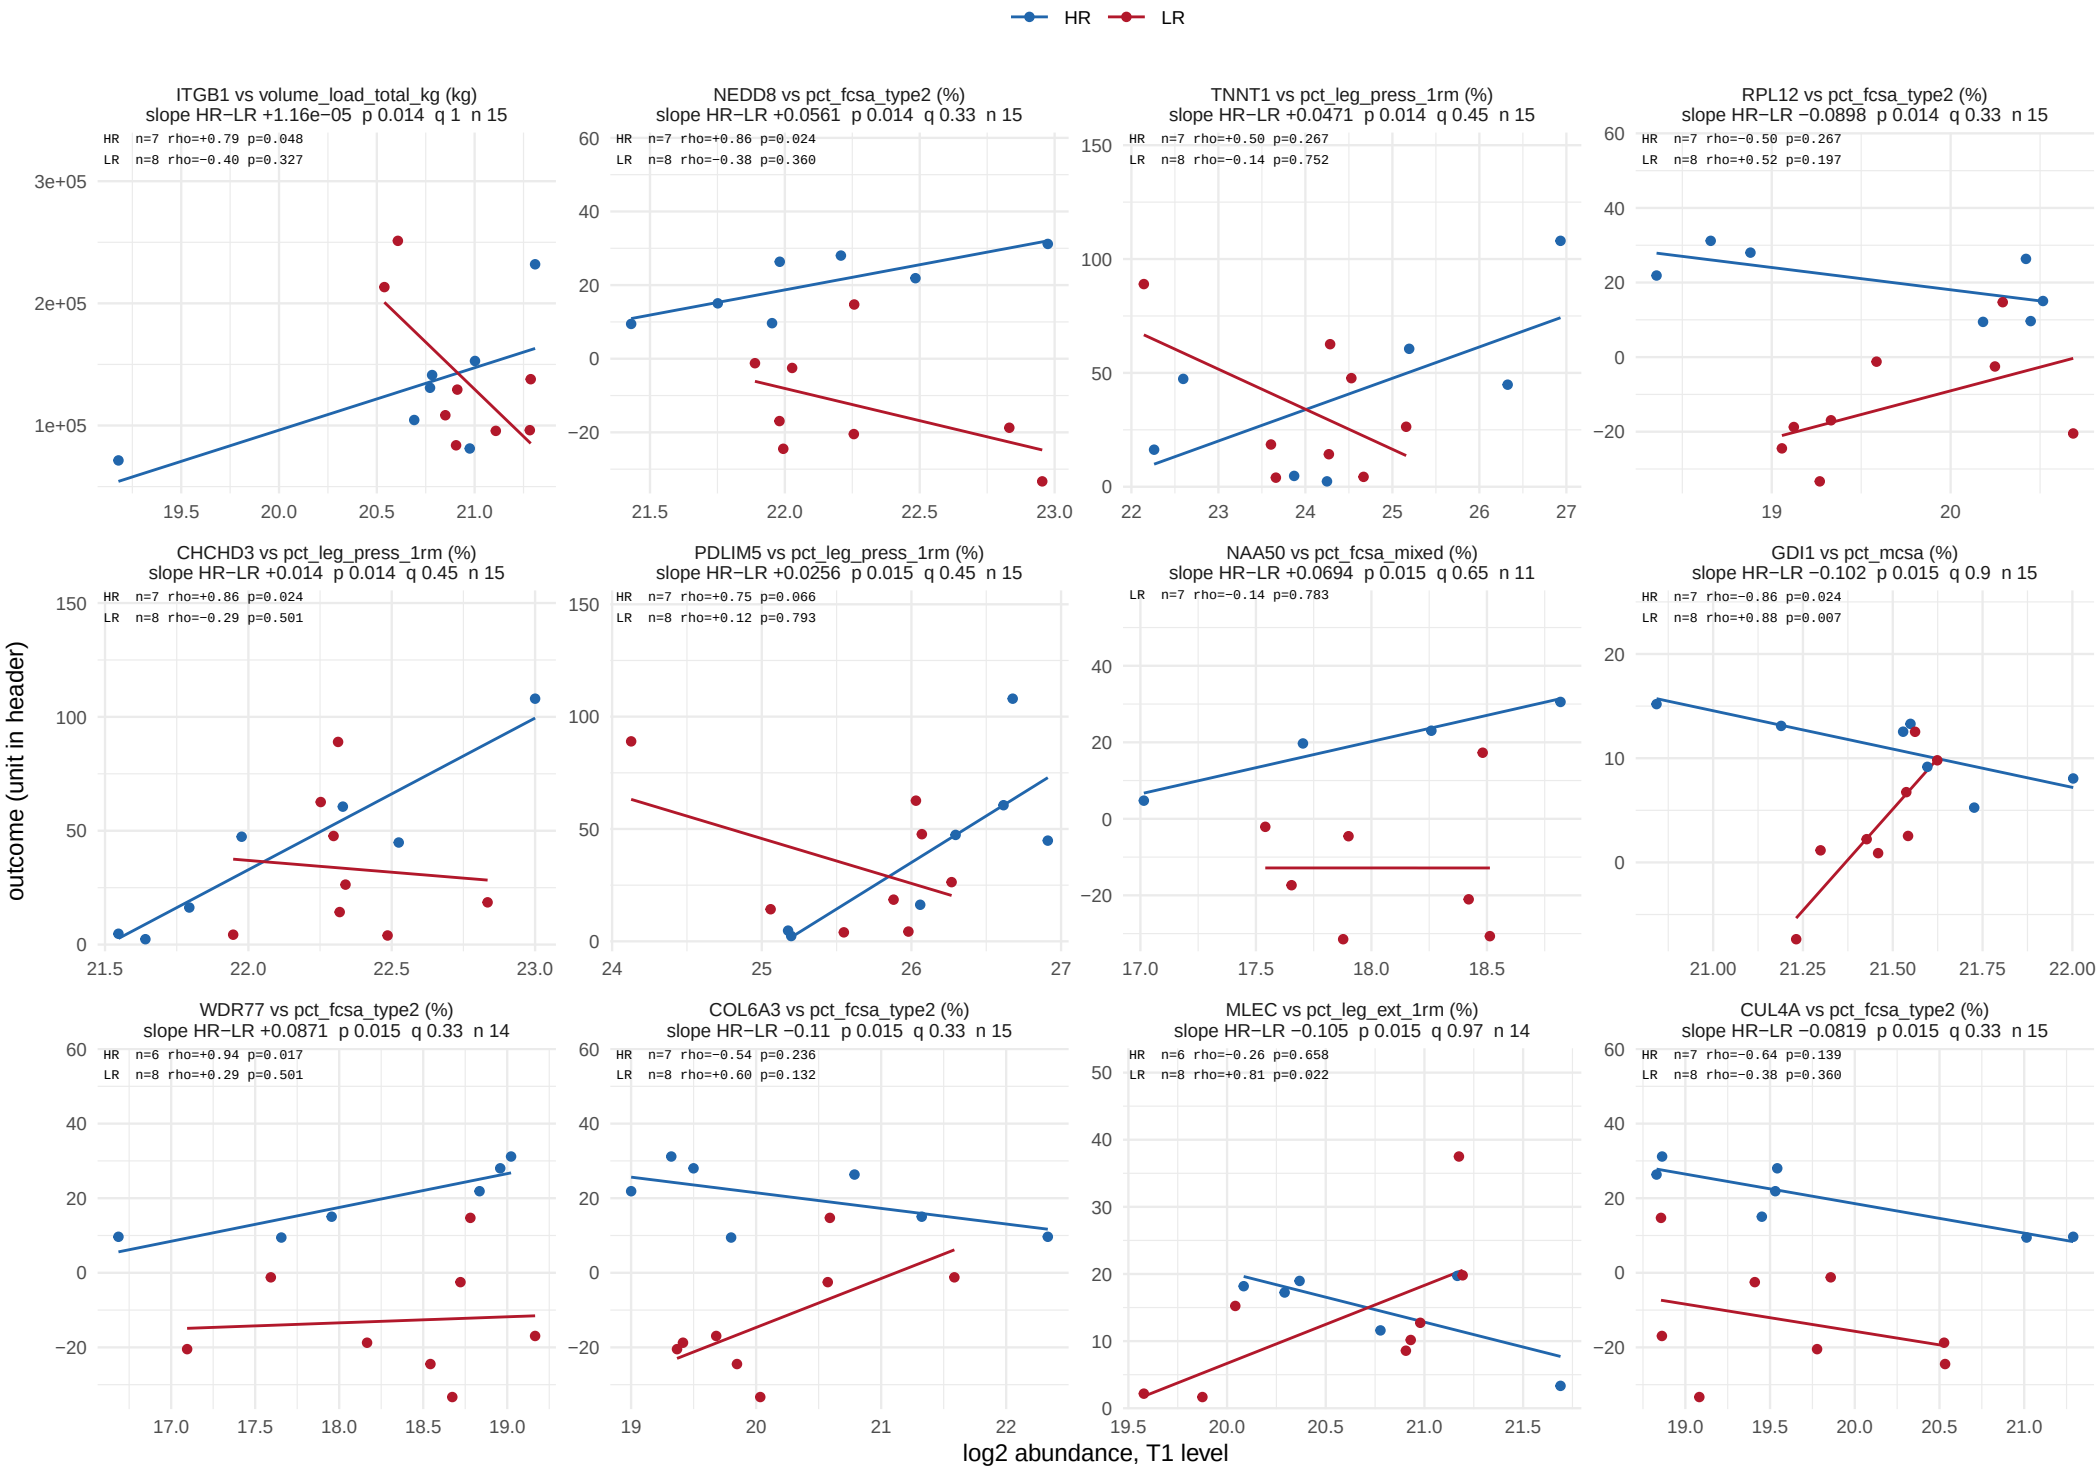

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


721 of 12553 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 20 of 61.

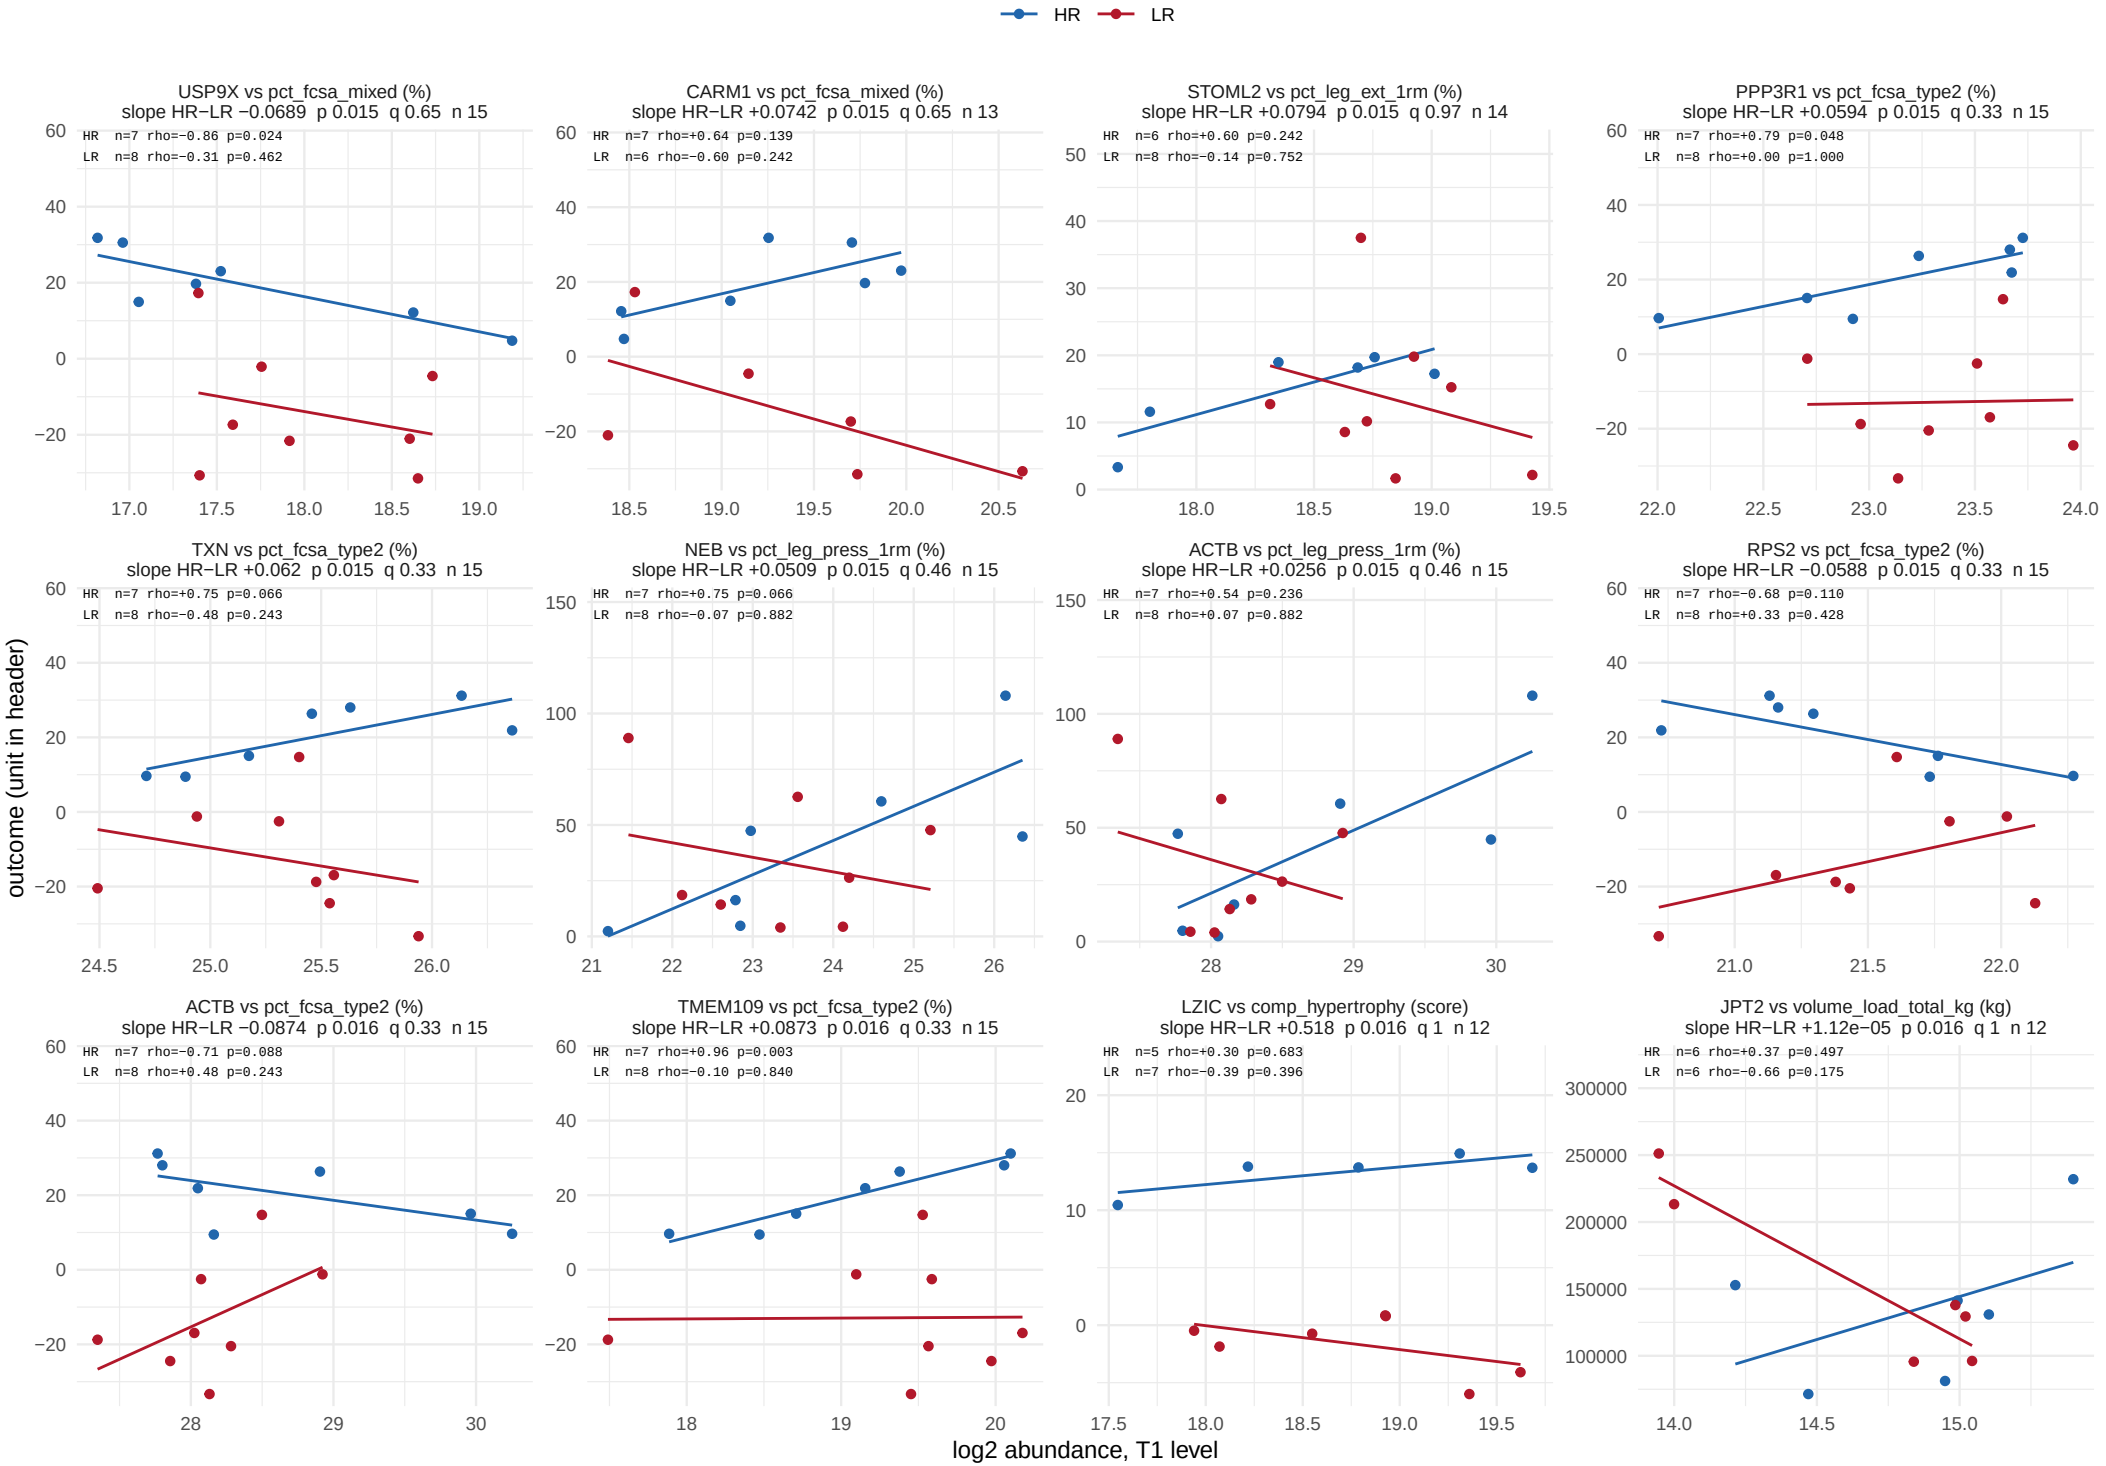

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


721 of 12553 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 21 of 61.

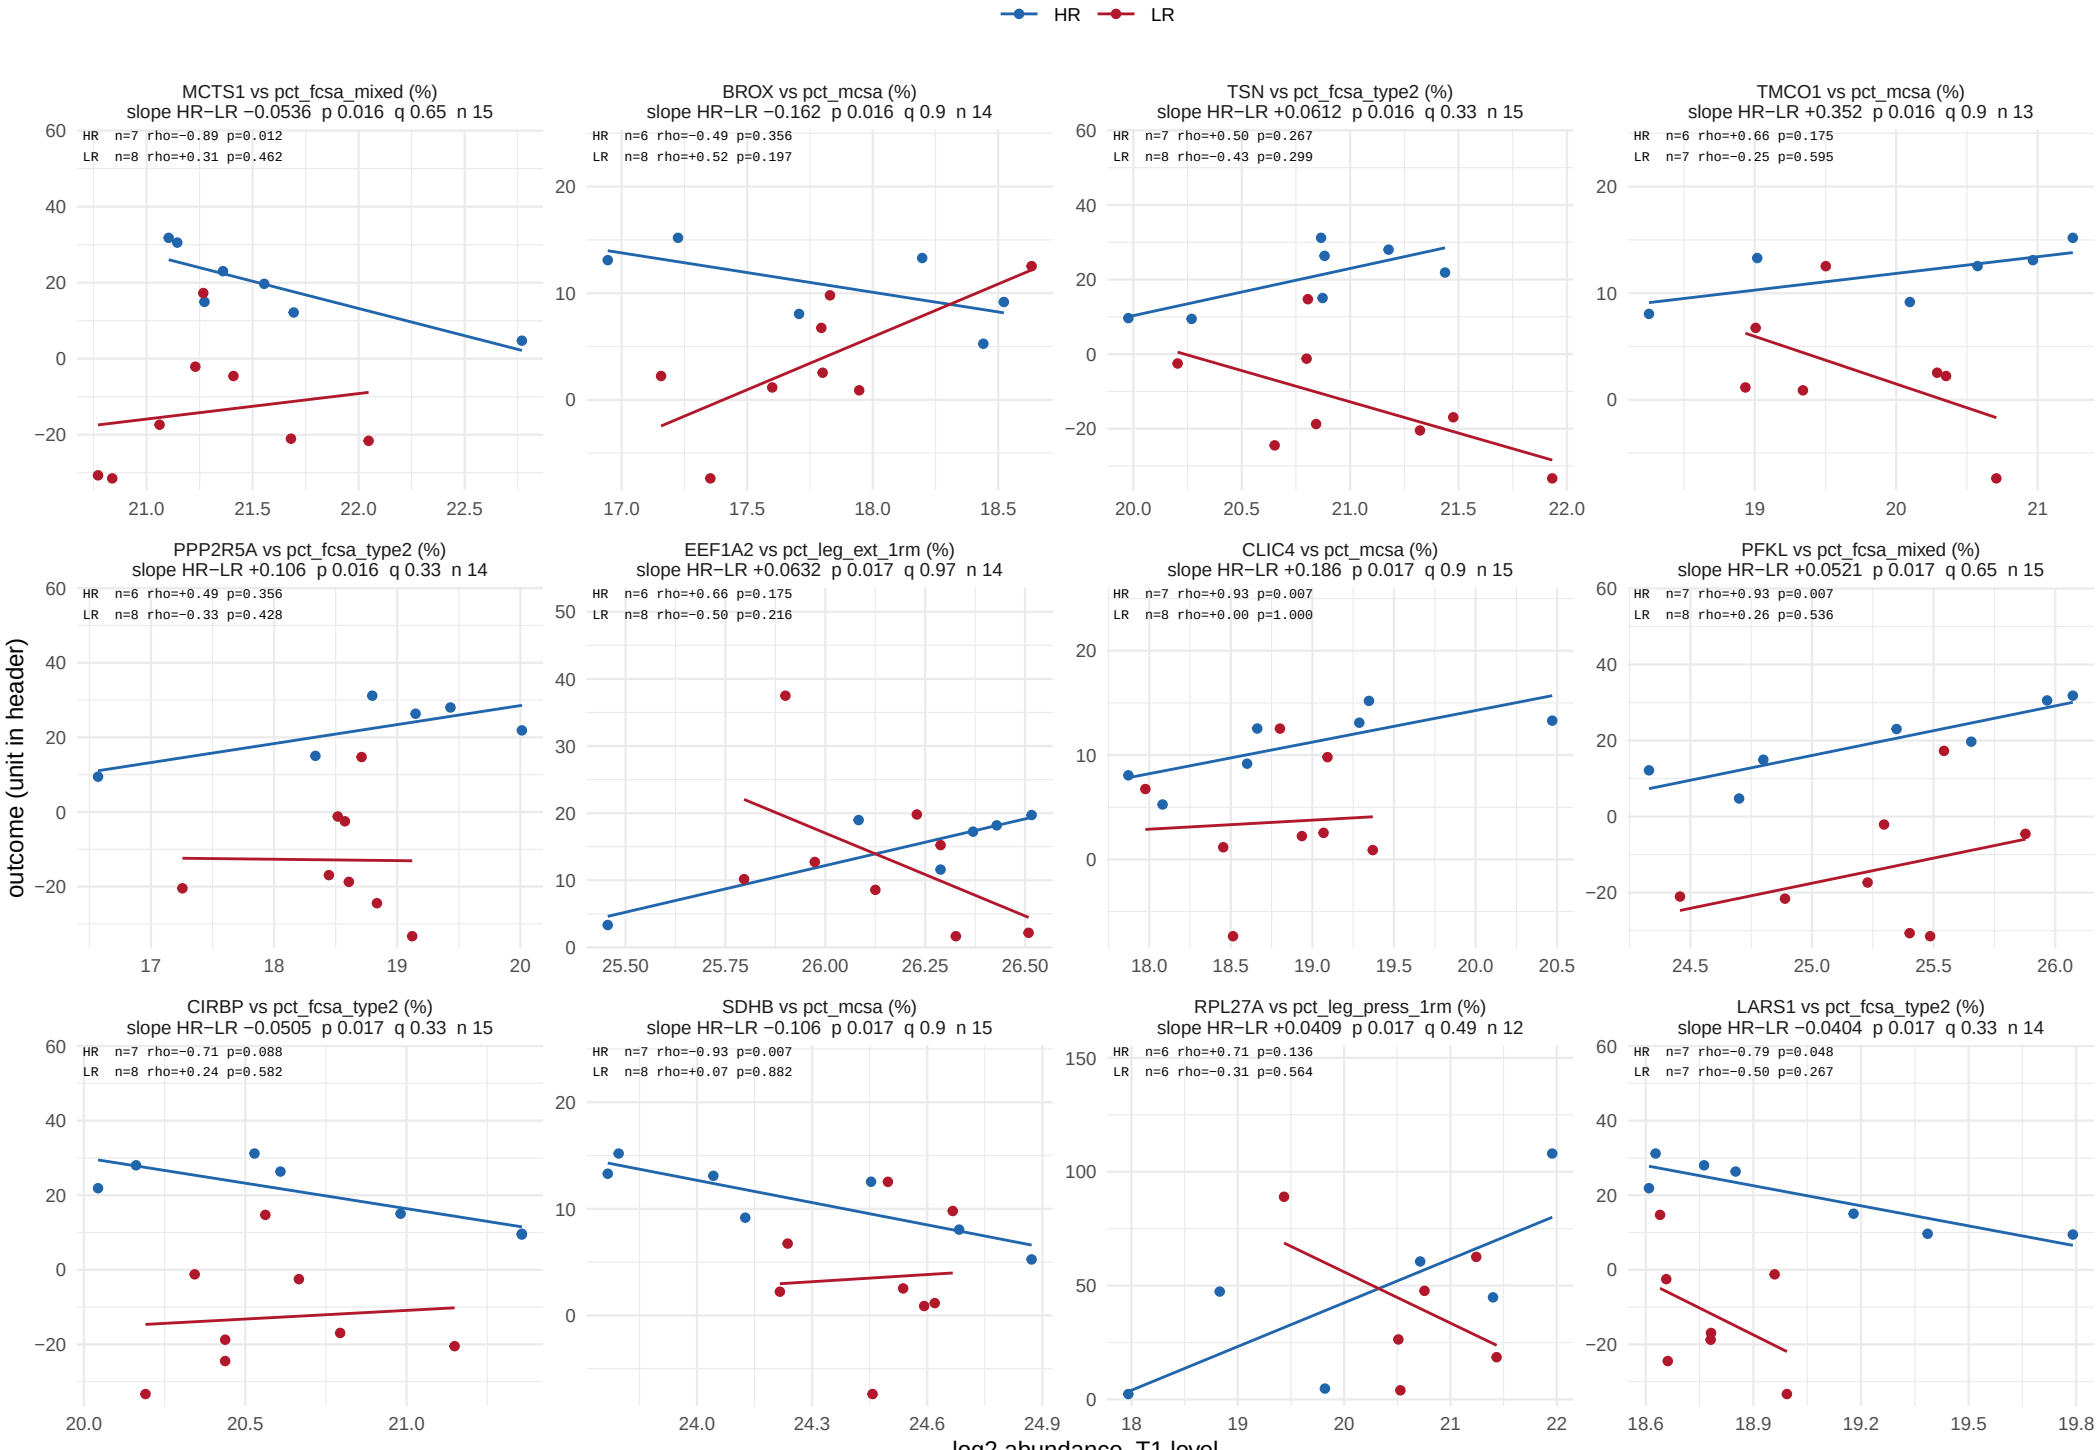

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


721 of 12553 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 22 of 61.

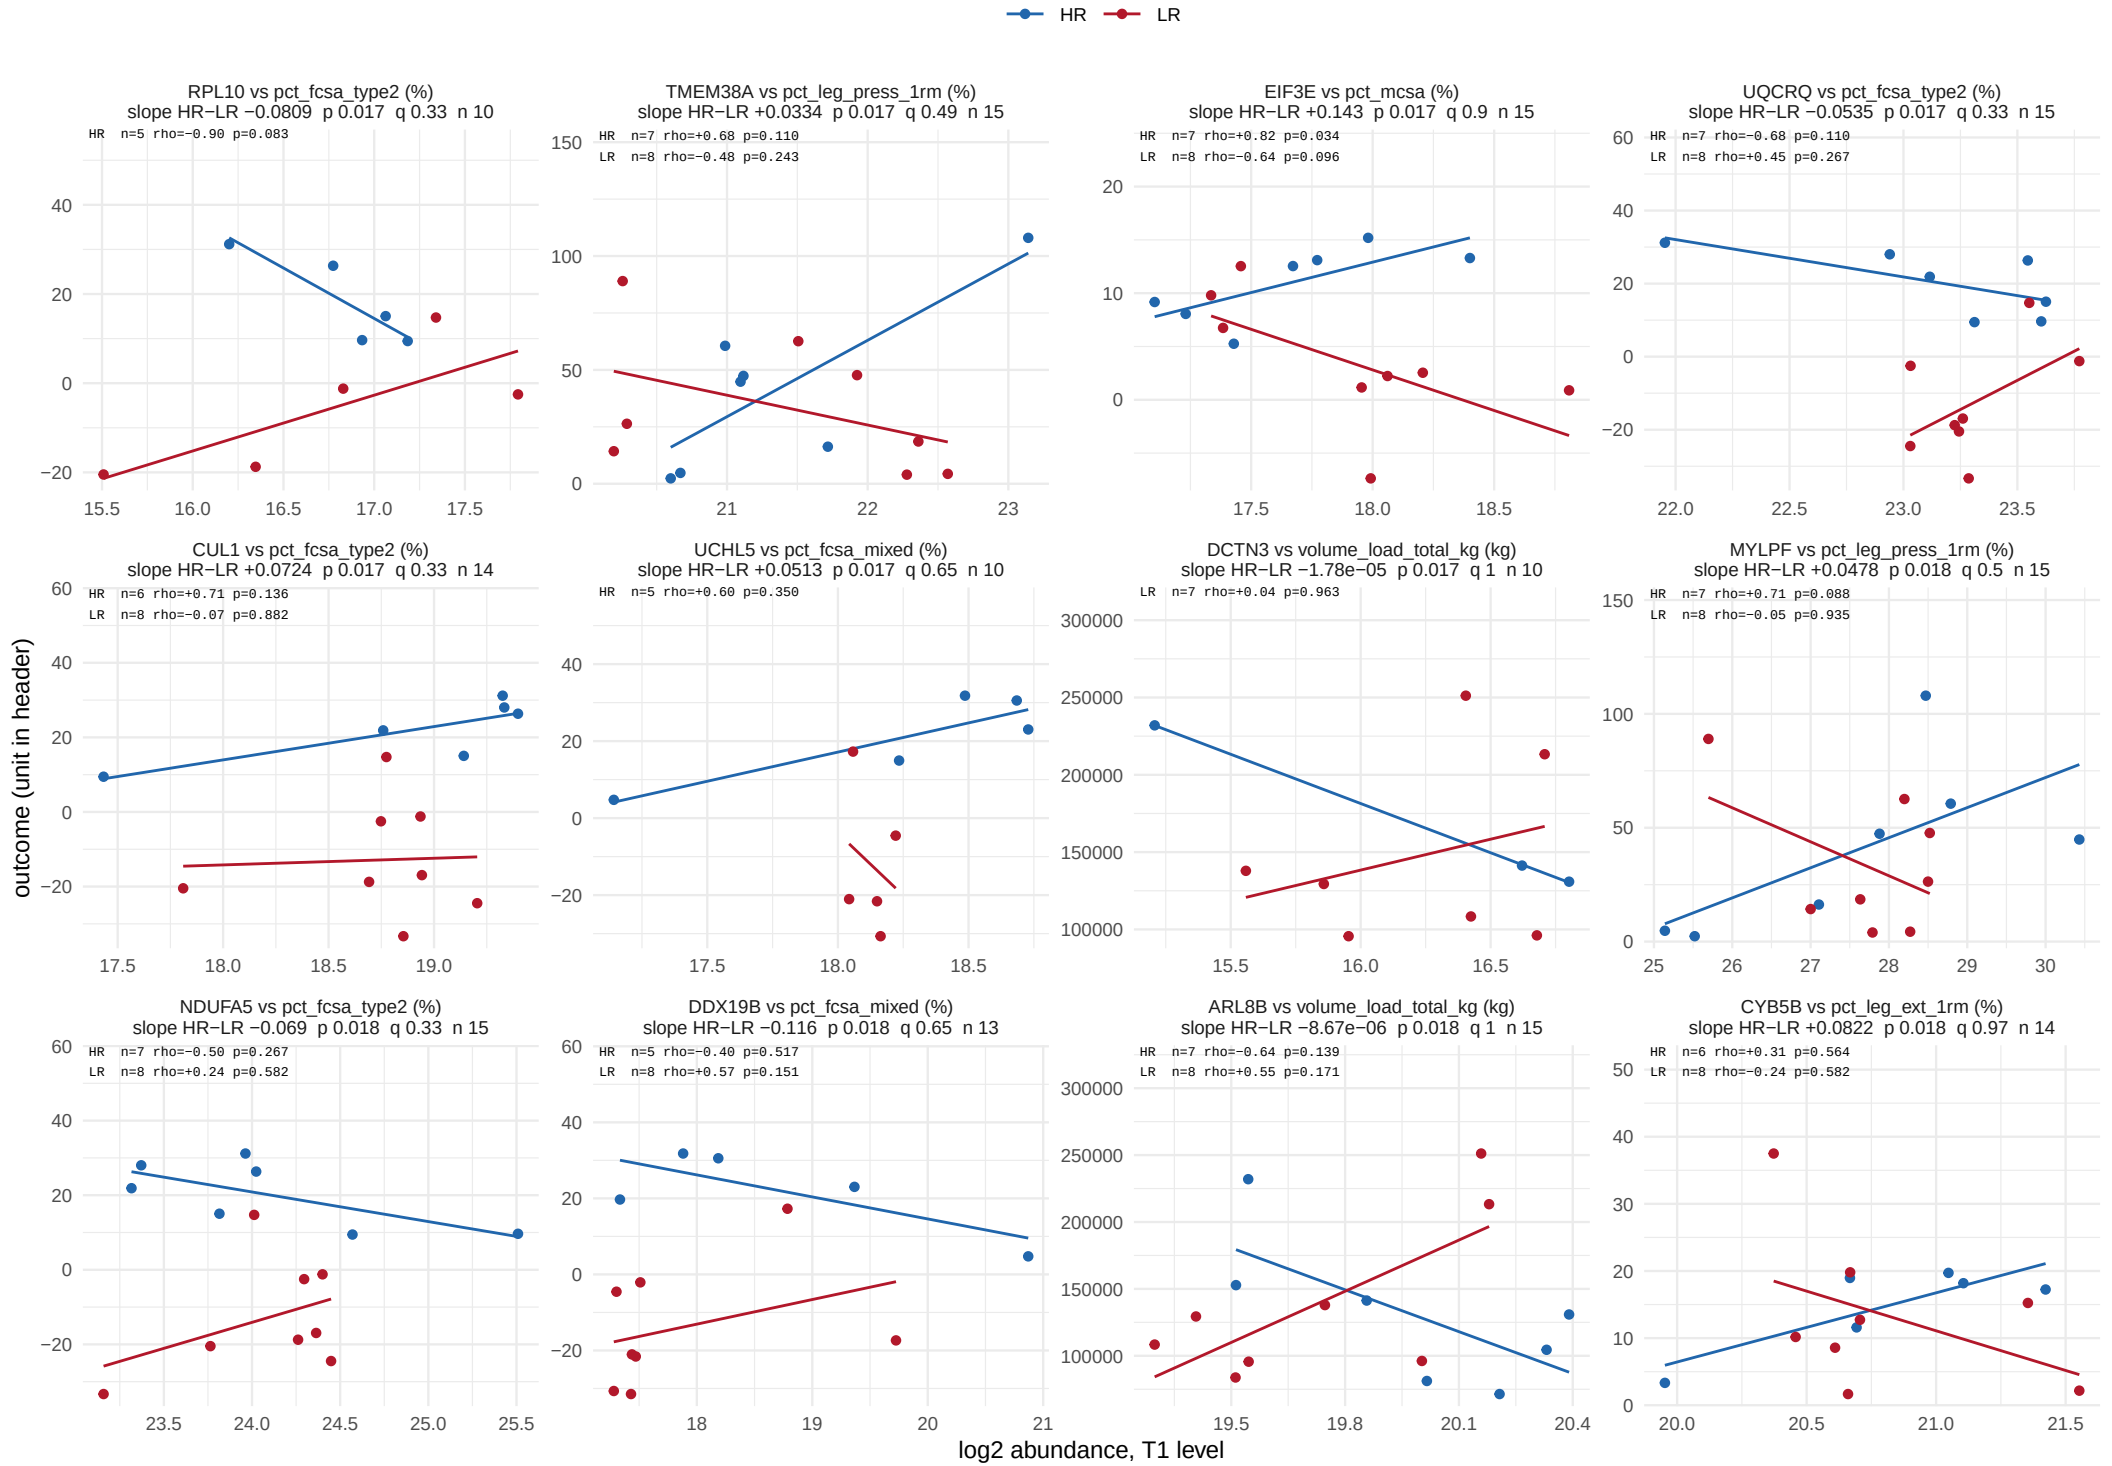

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


721 of 12553 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 23 of 61.

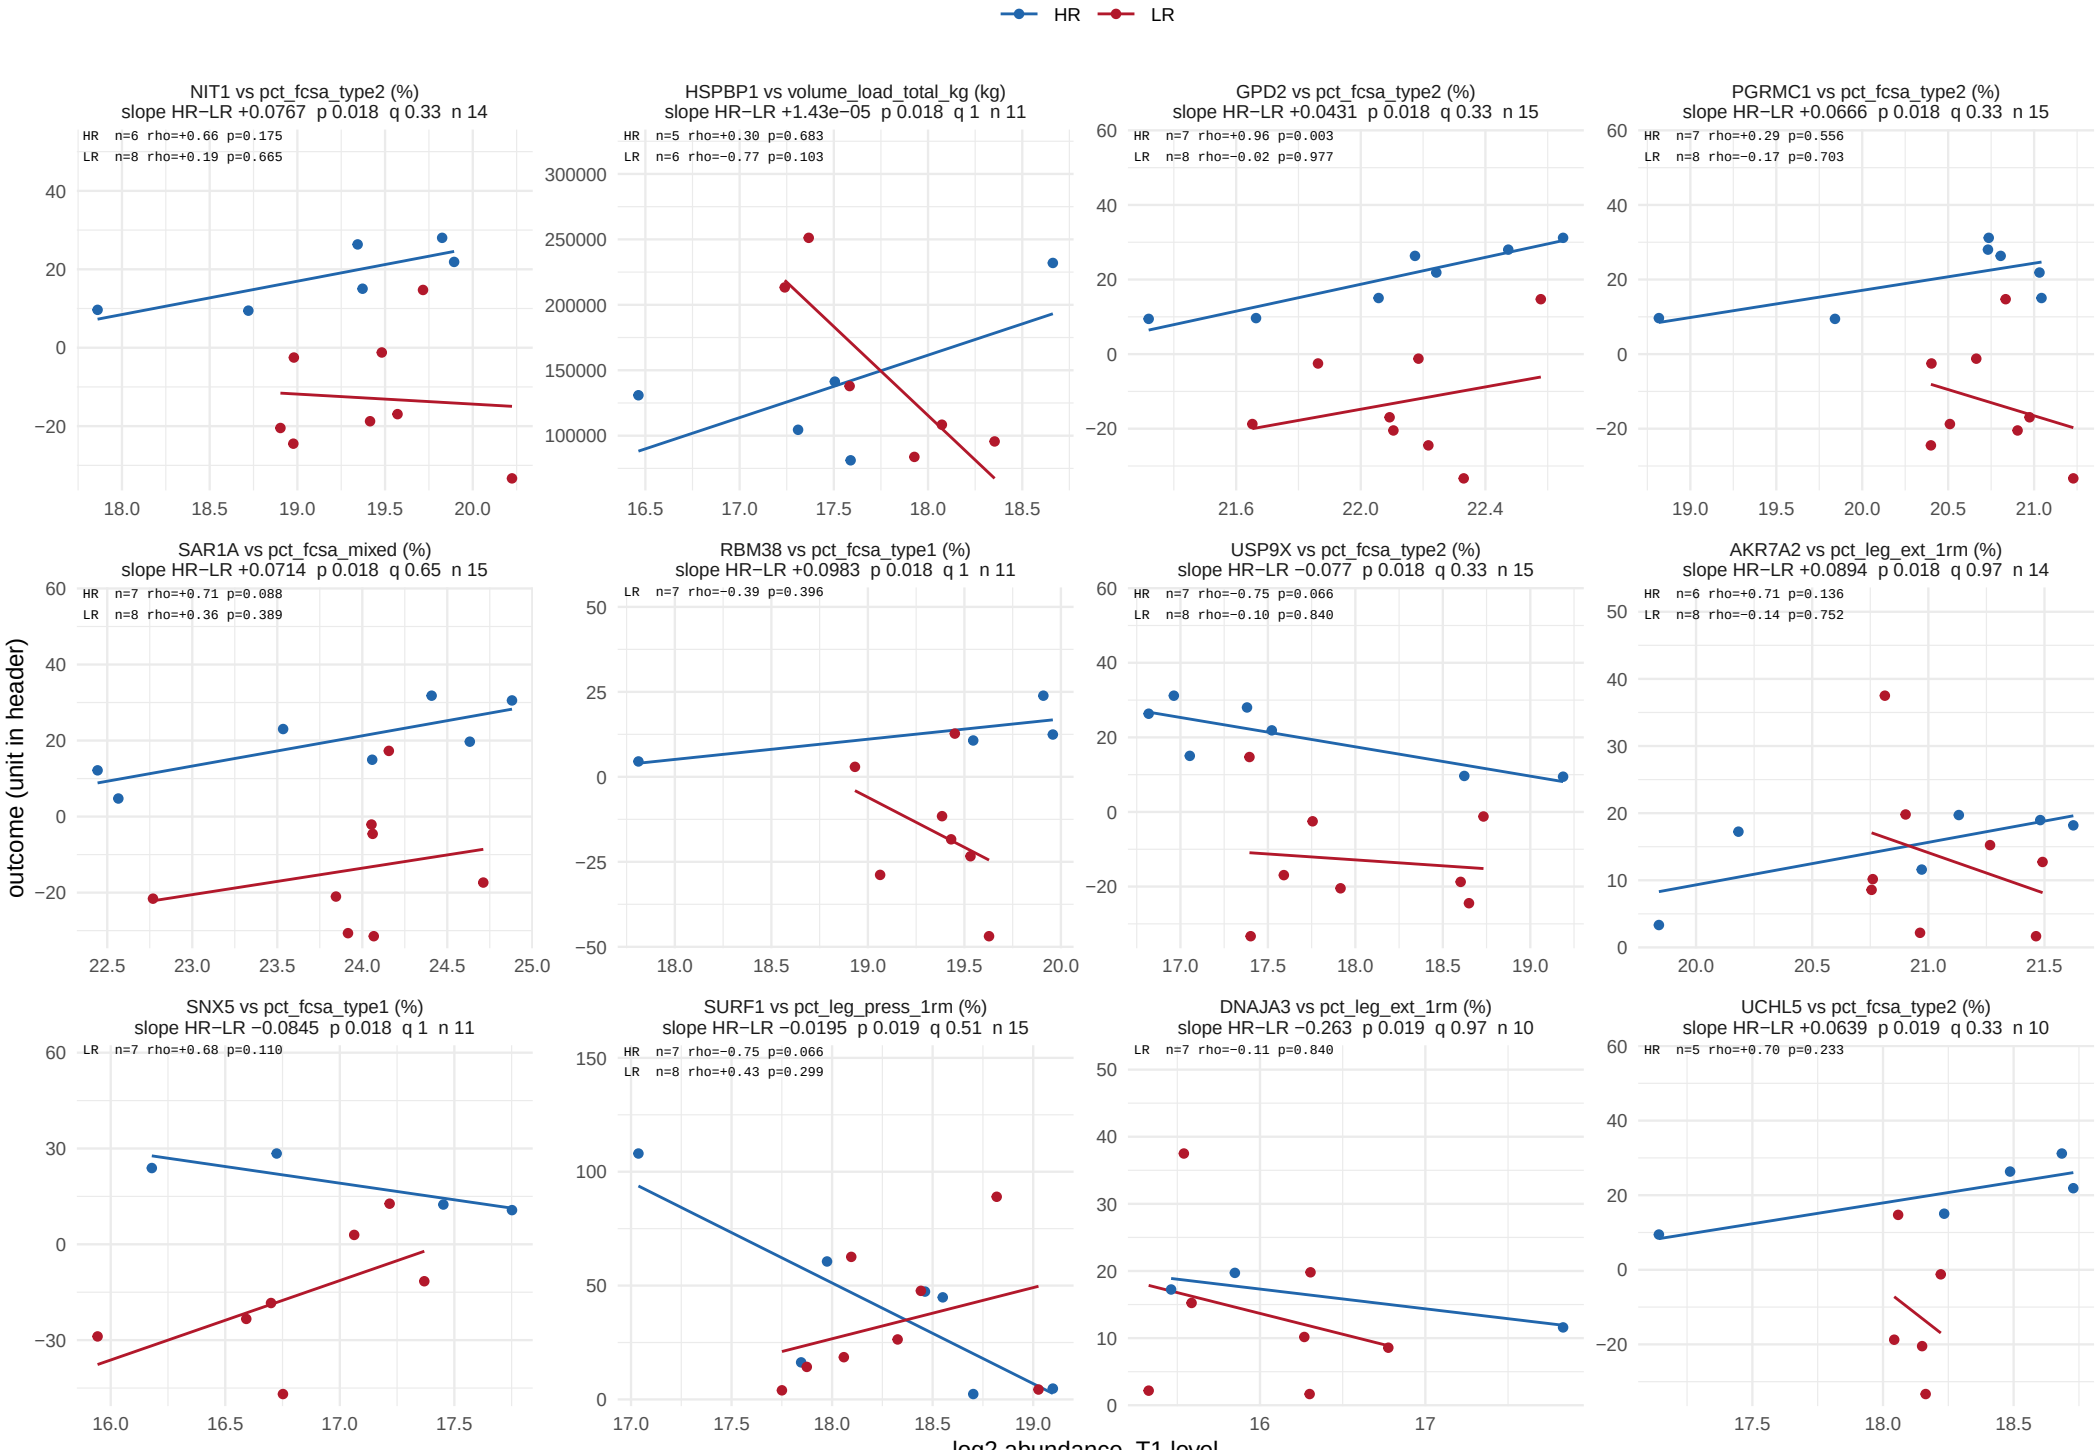

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


721 of 12553 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 24 of 61.

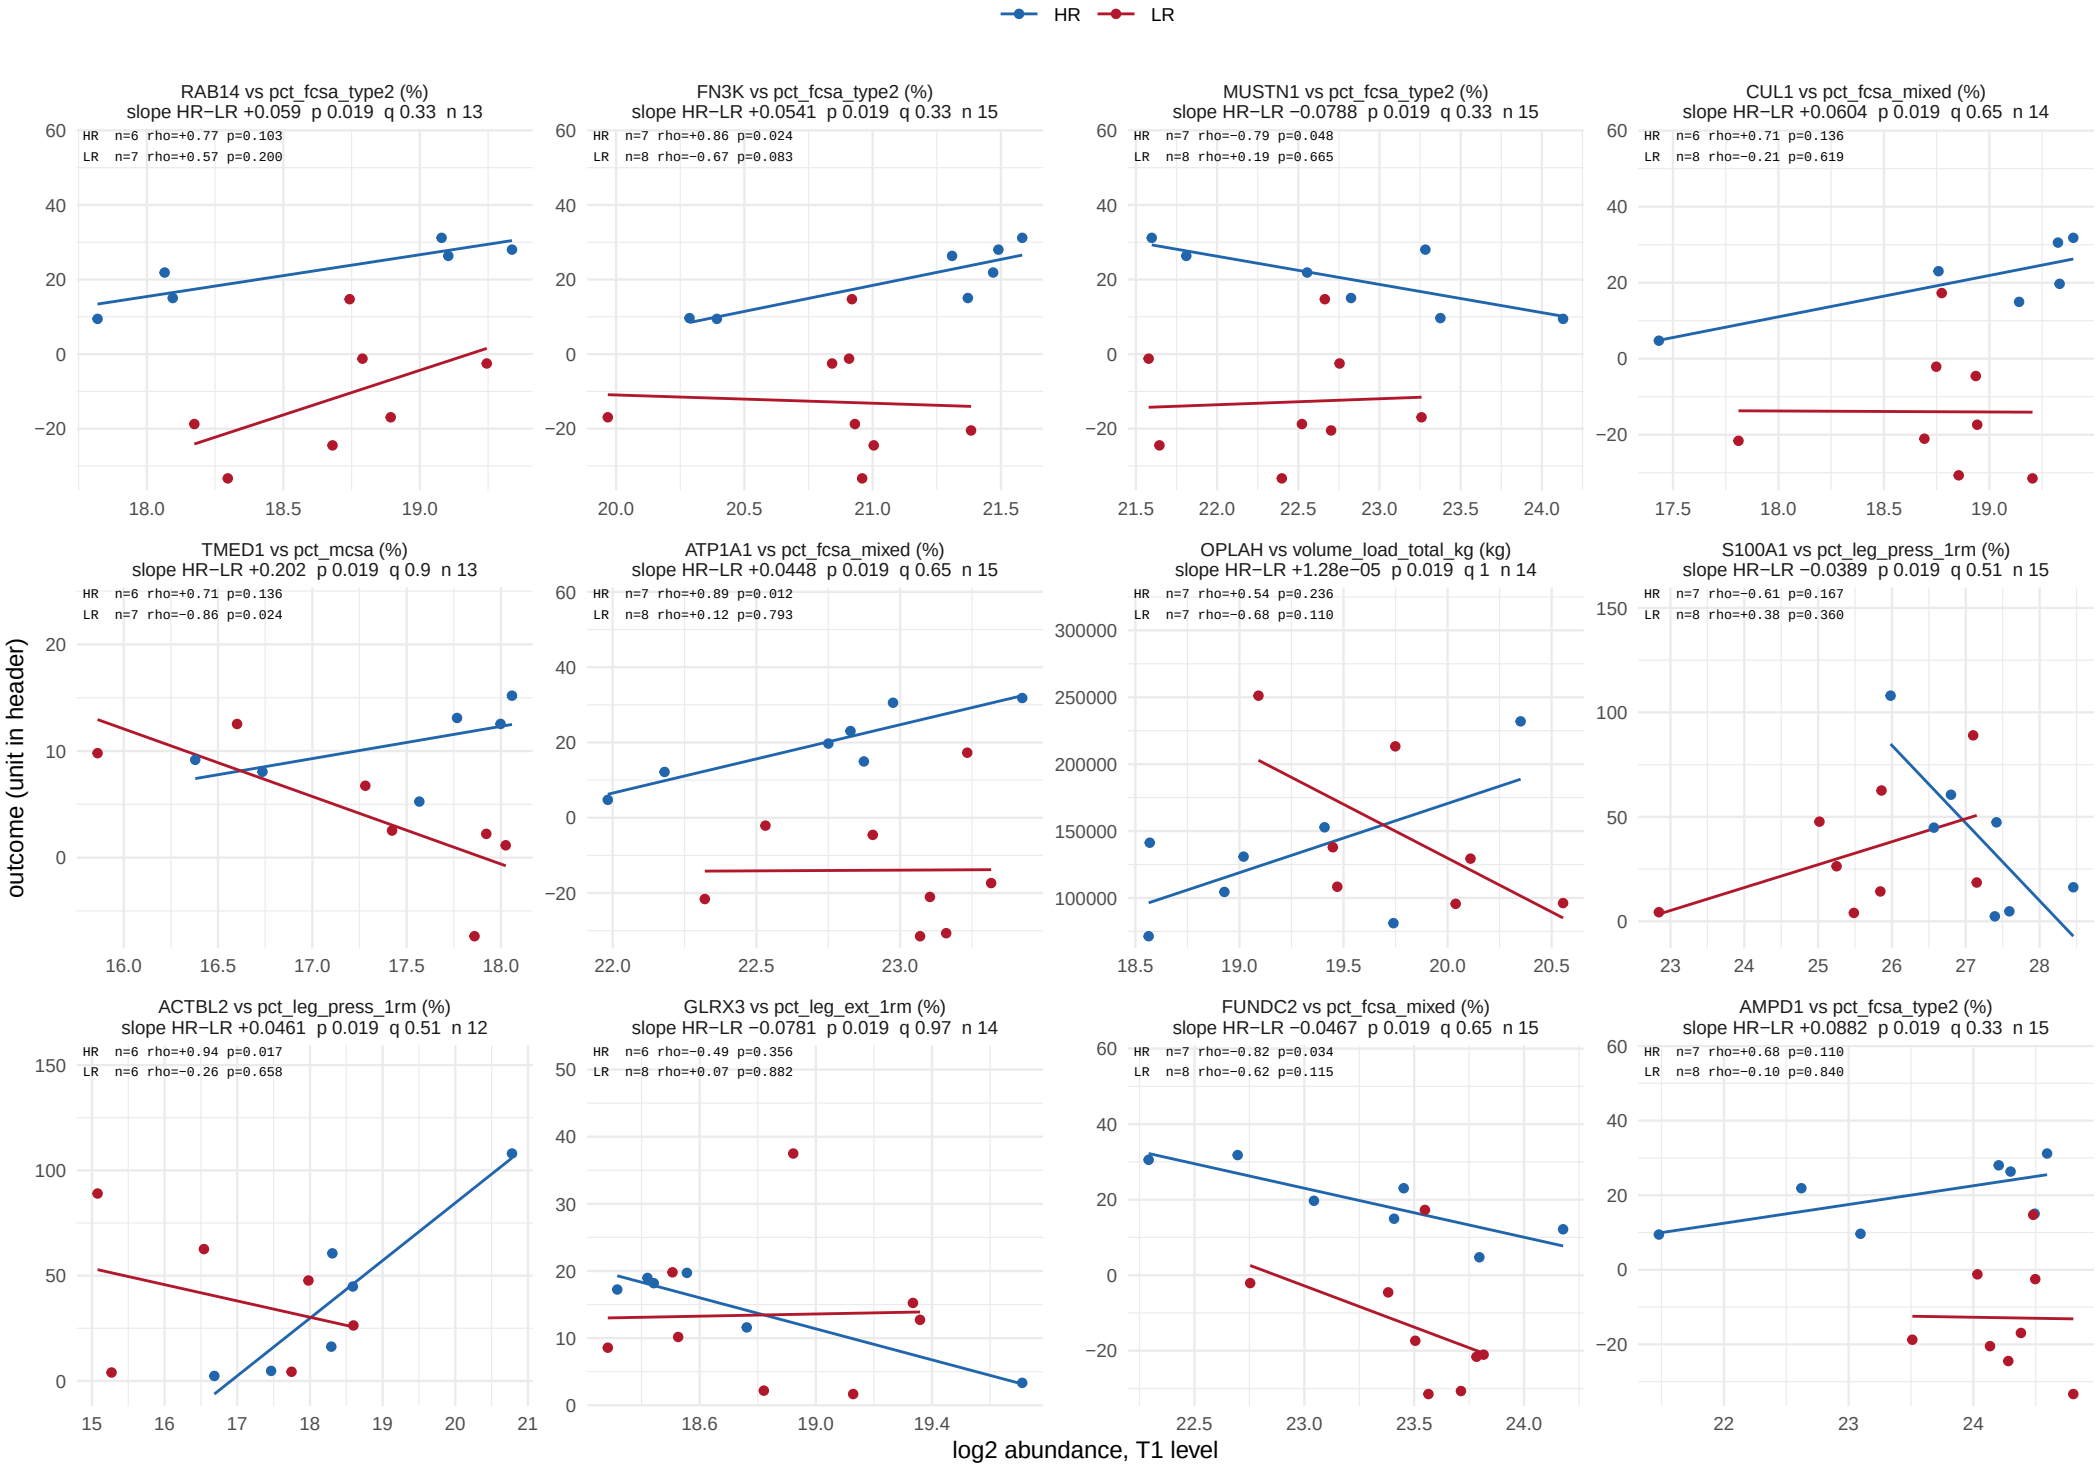

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


721 of 12553 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 25 of 61.

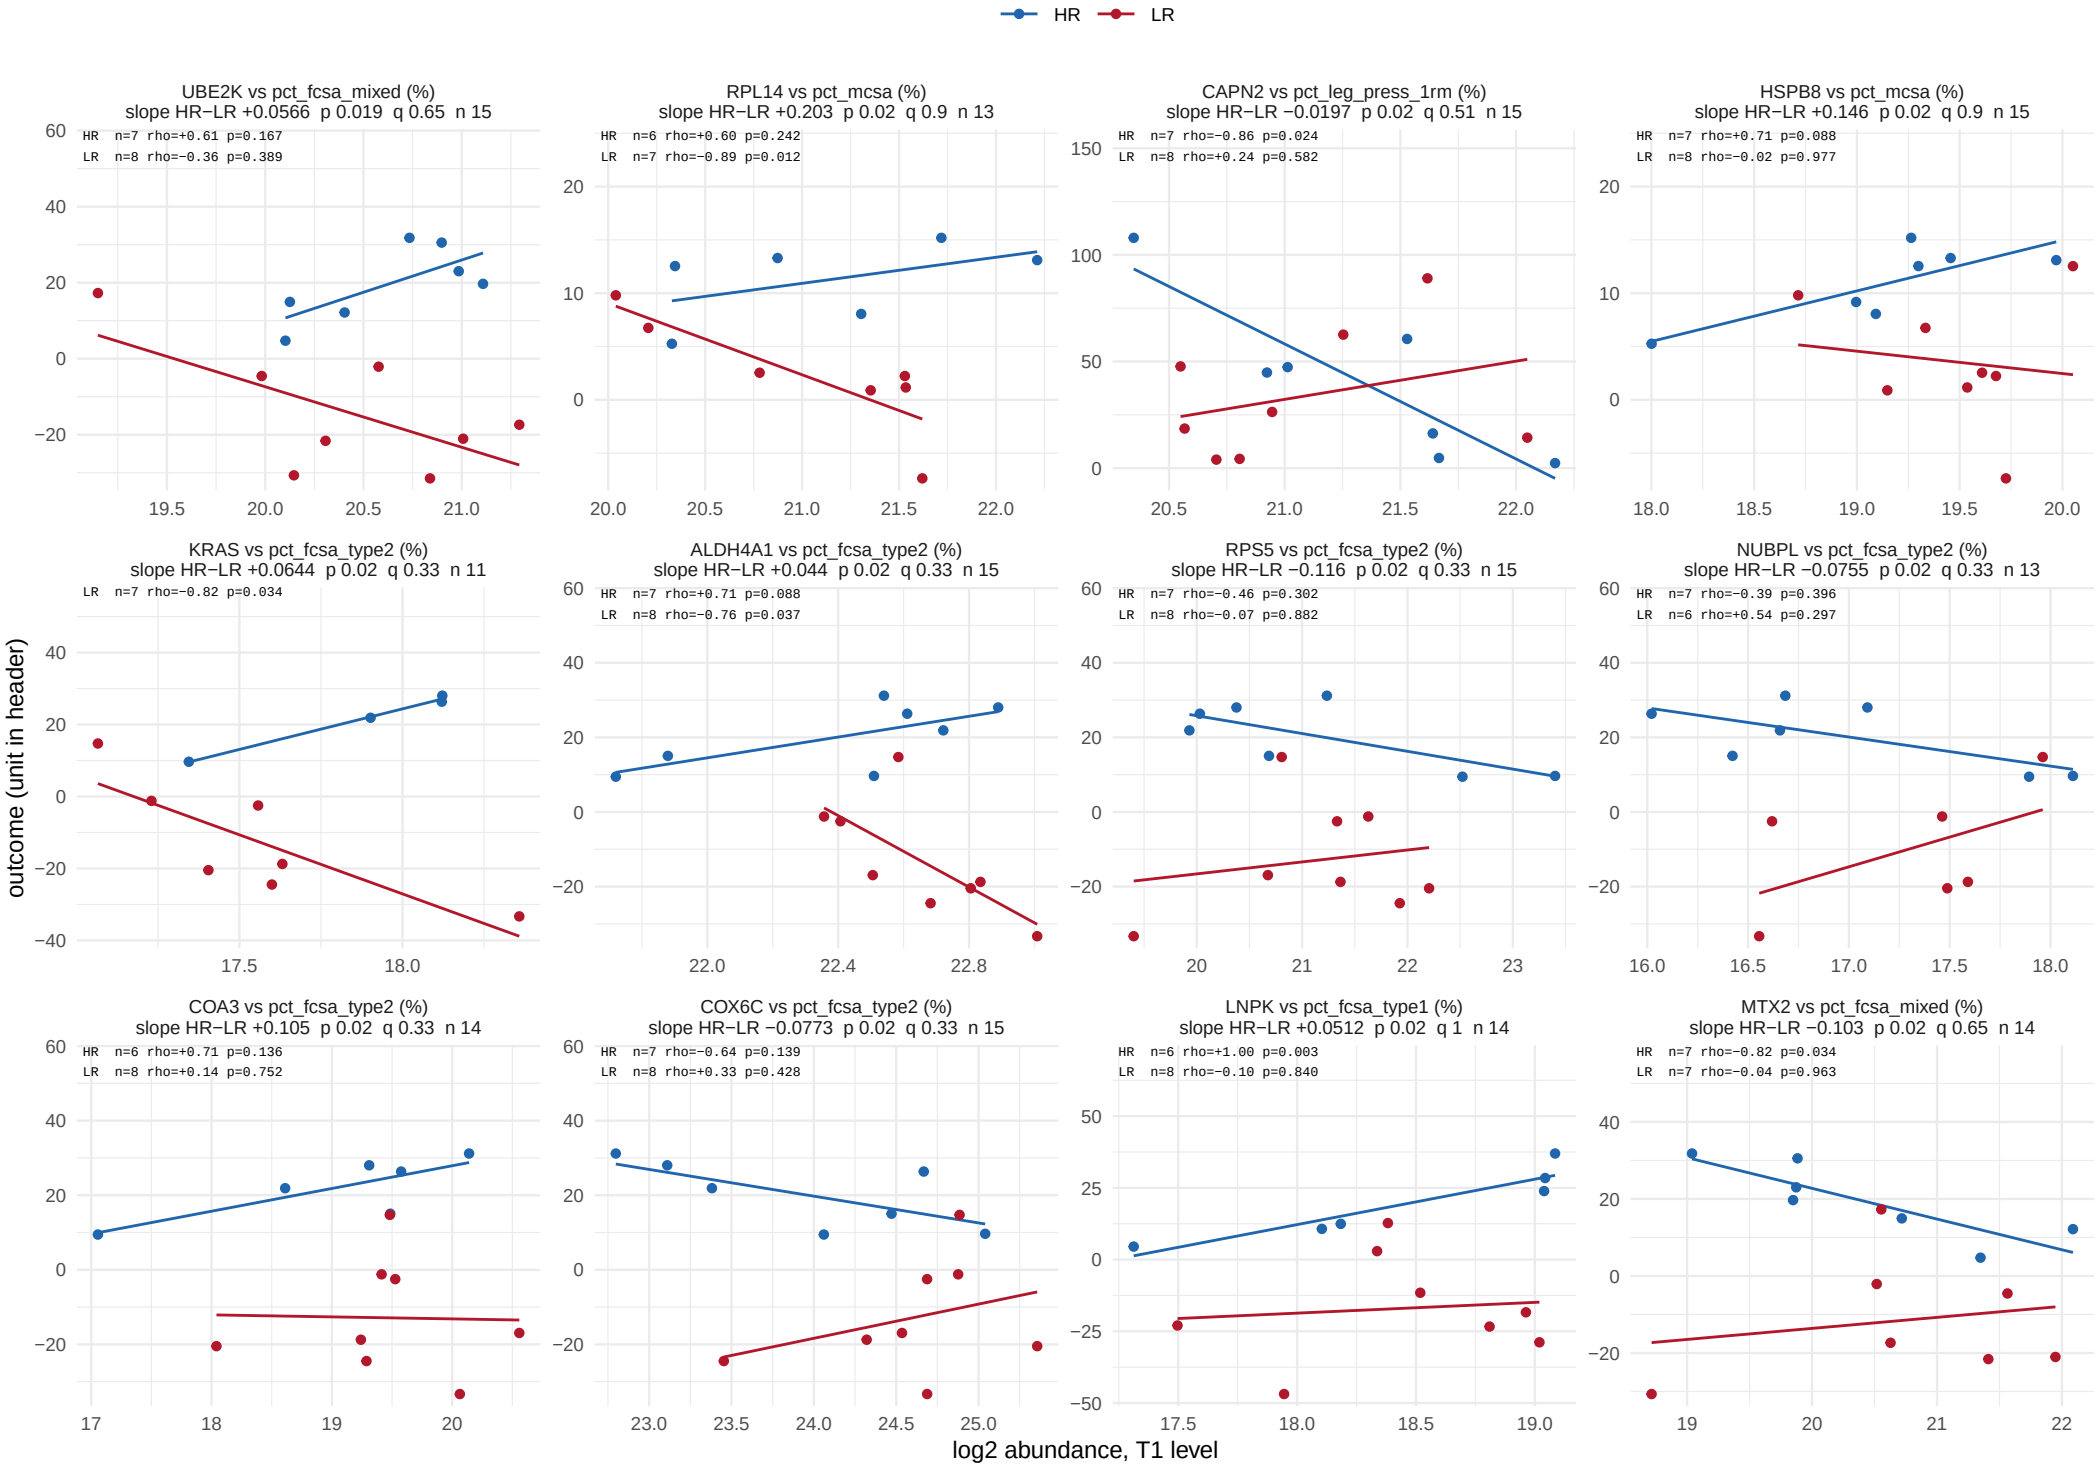

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


721 of 12553 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 26 of 61.

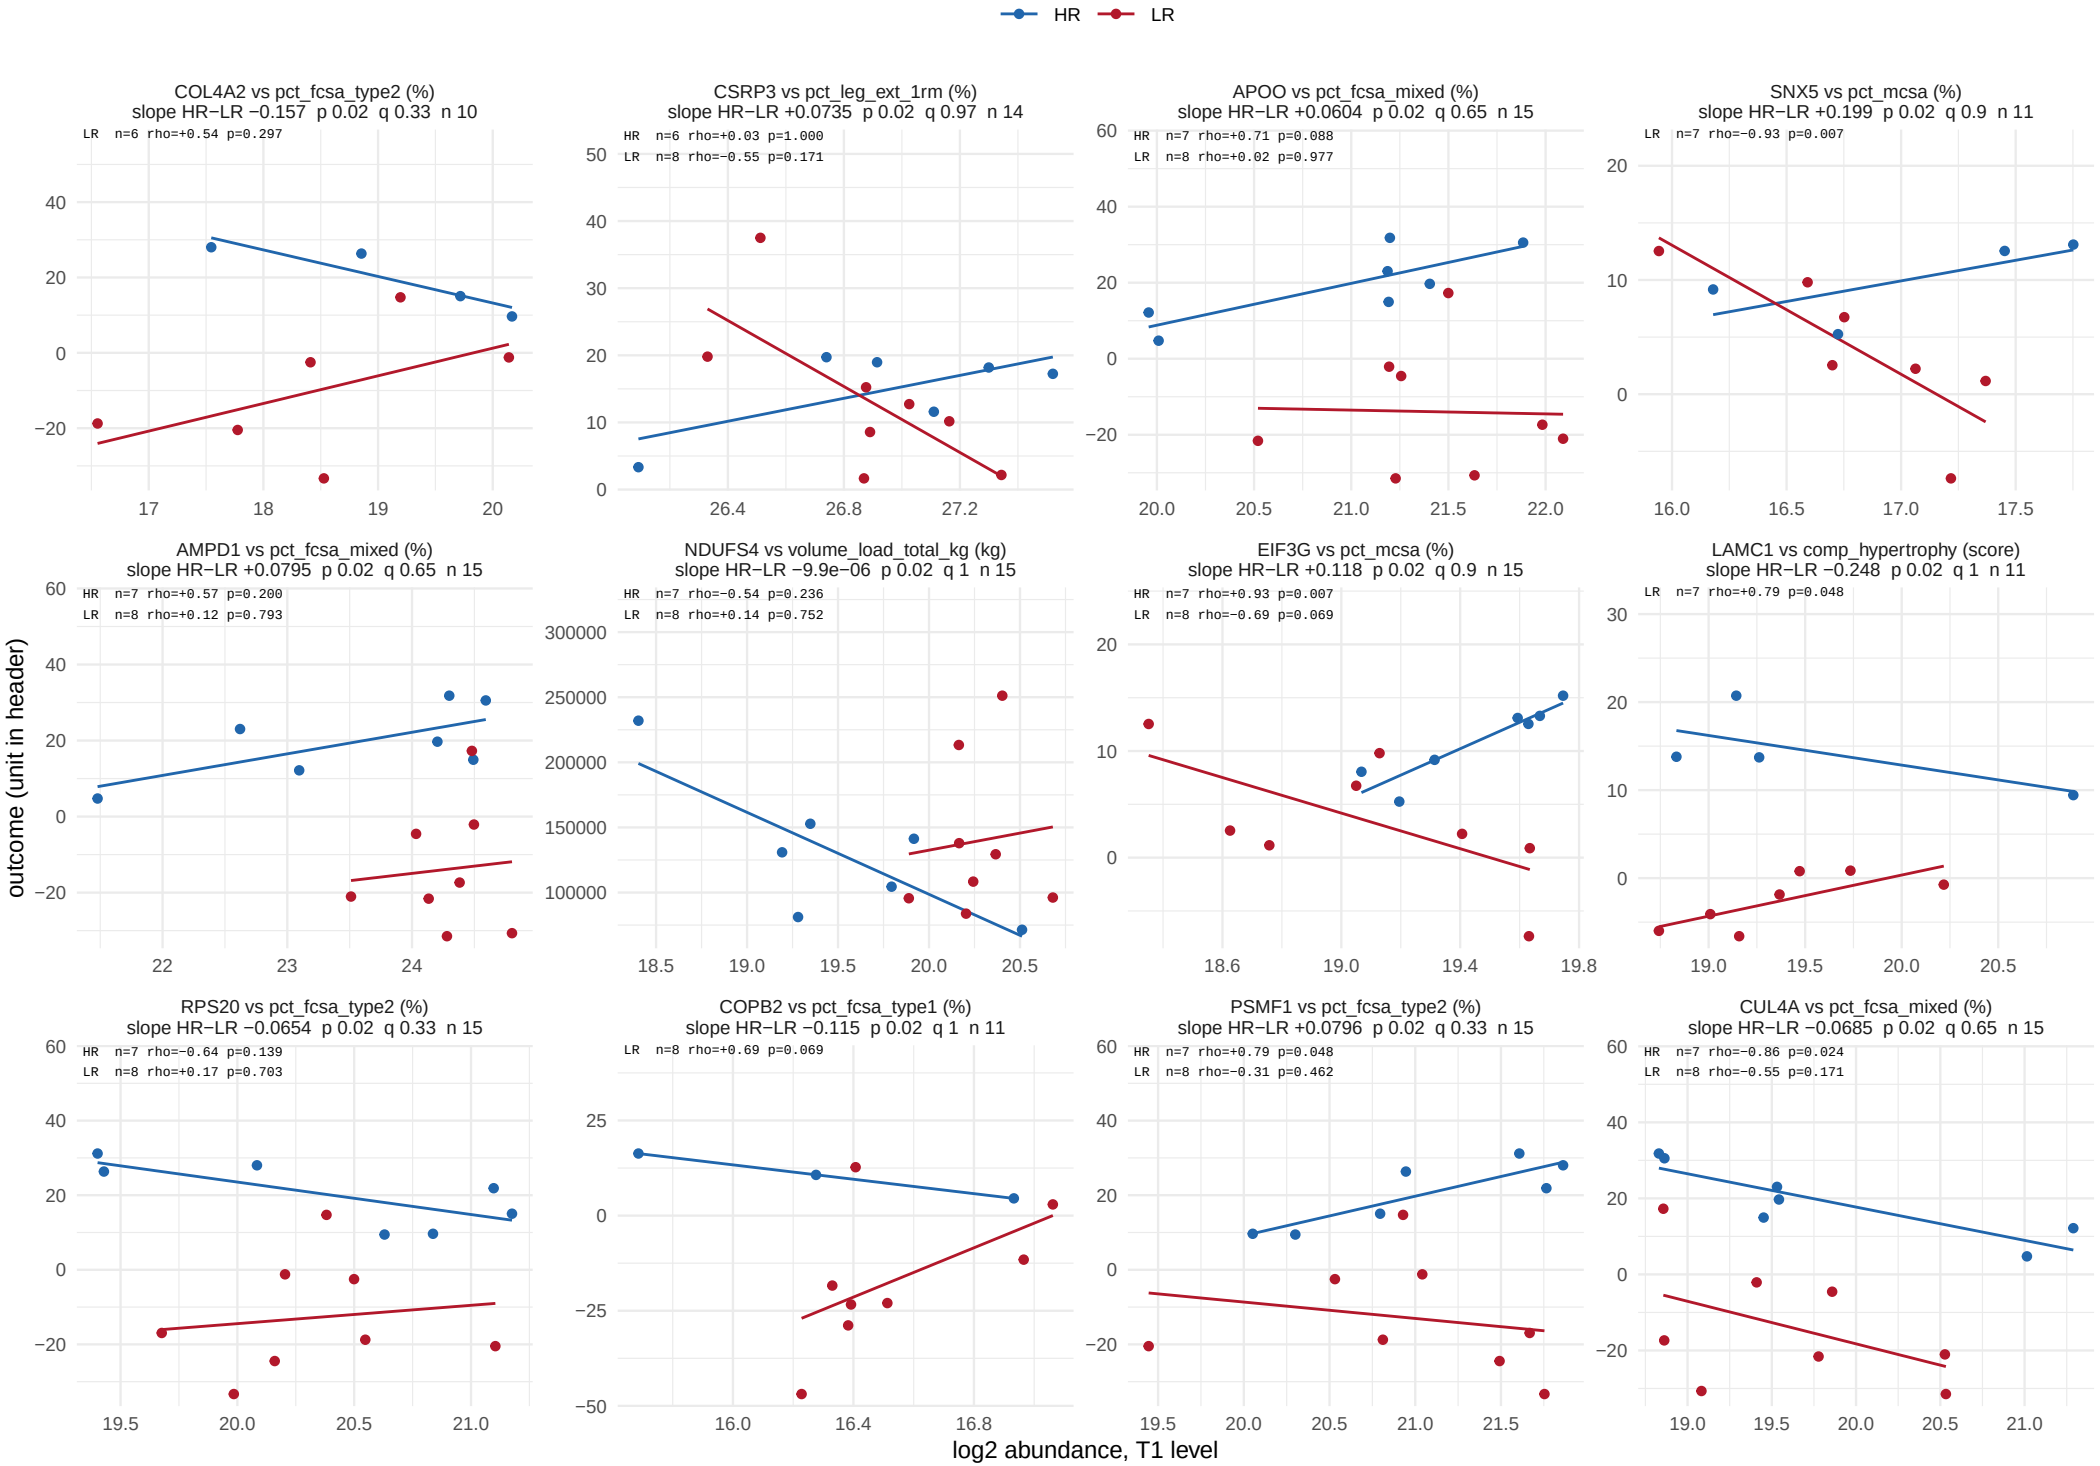

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


721 of 12553 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 27 of 61.

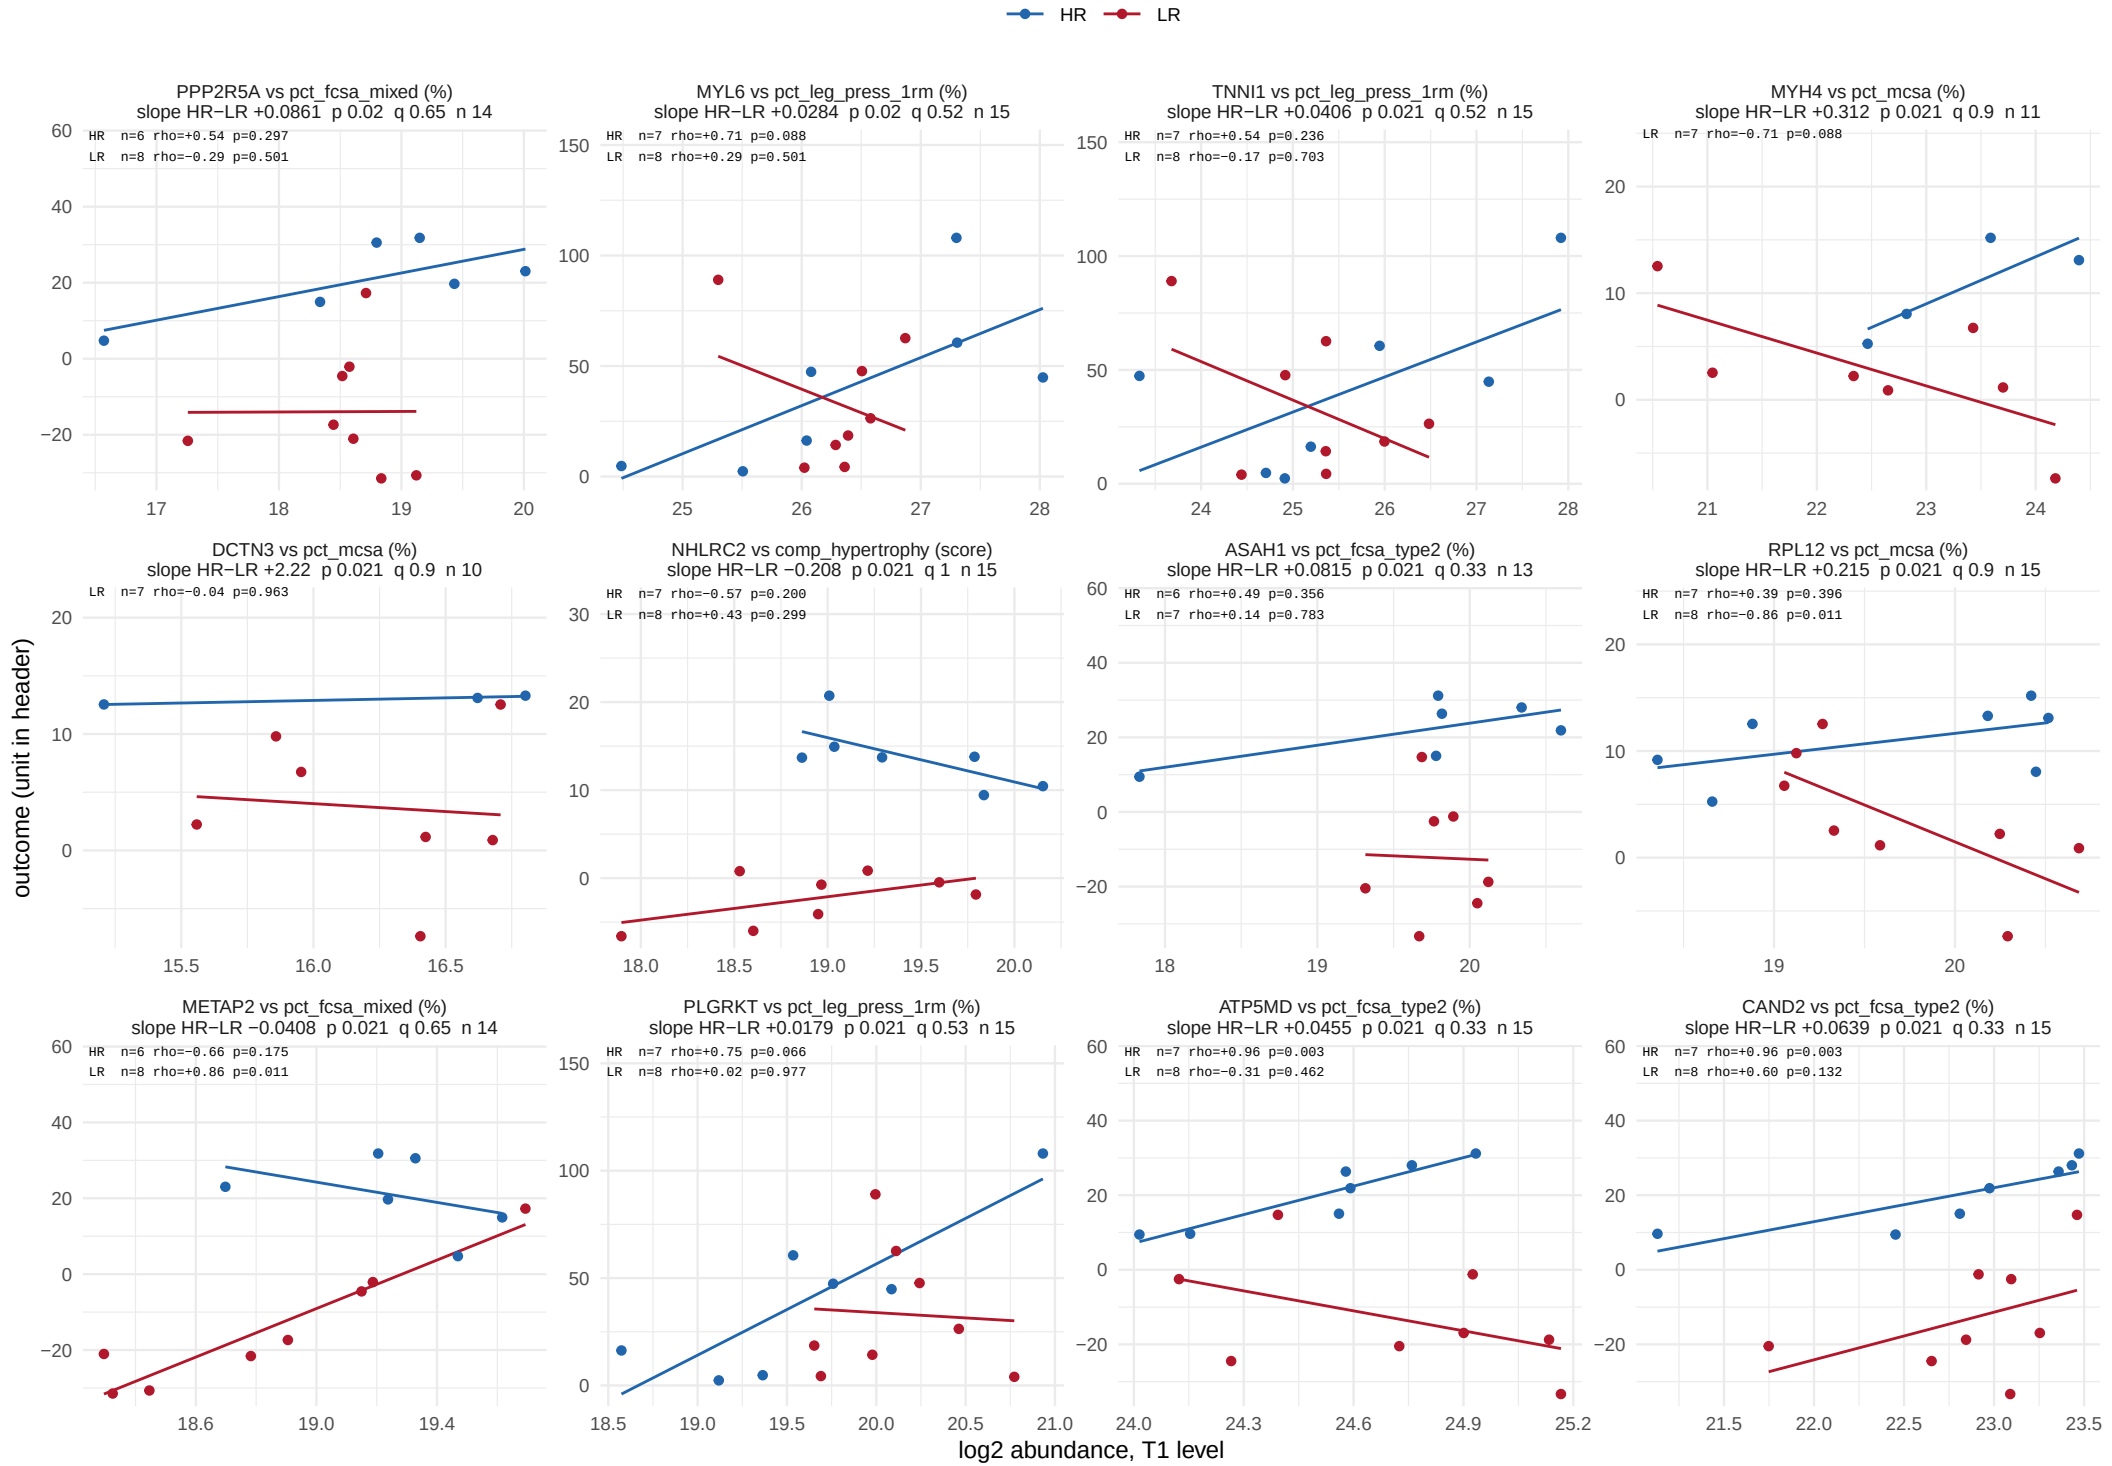

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


721 of 12553 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 28 of 61.

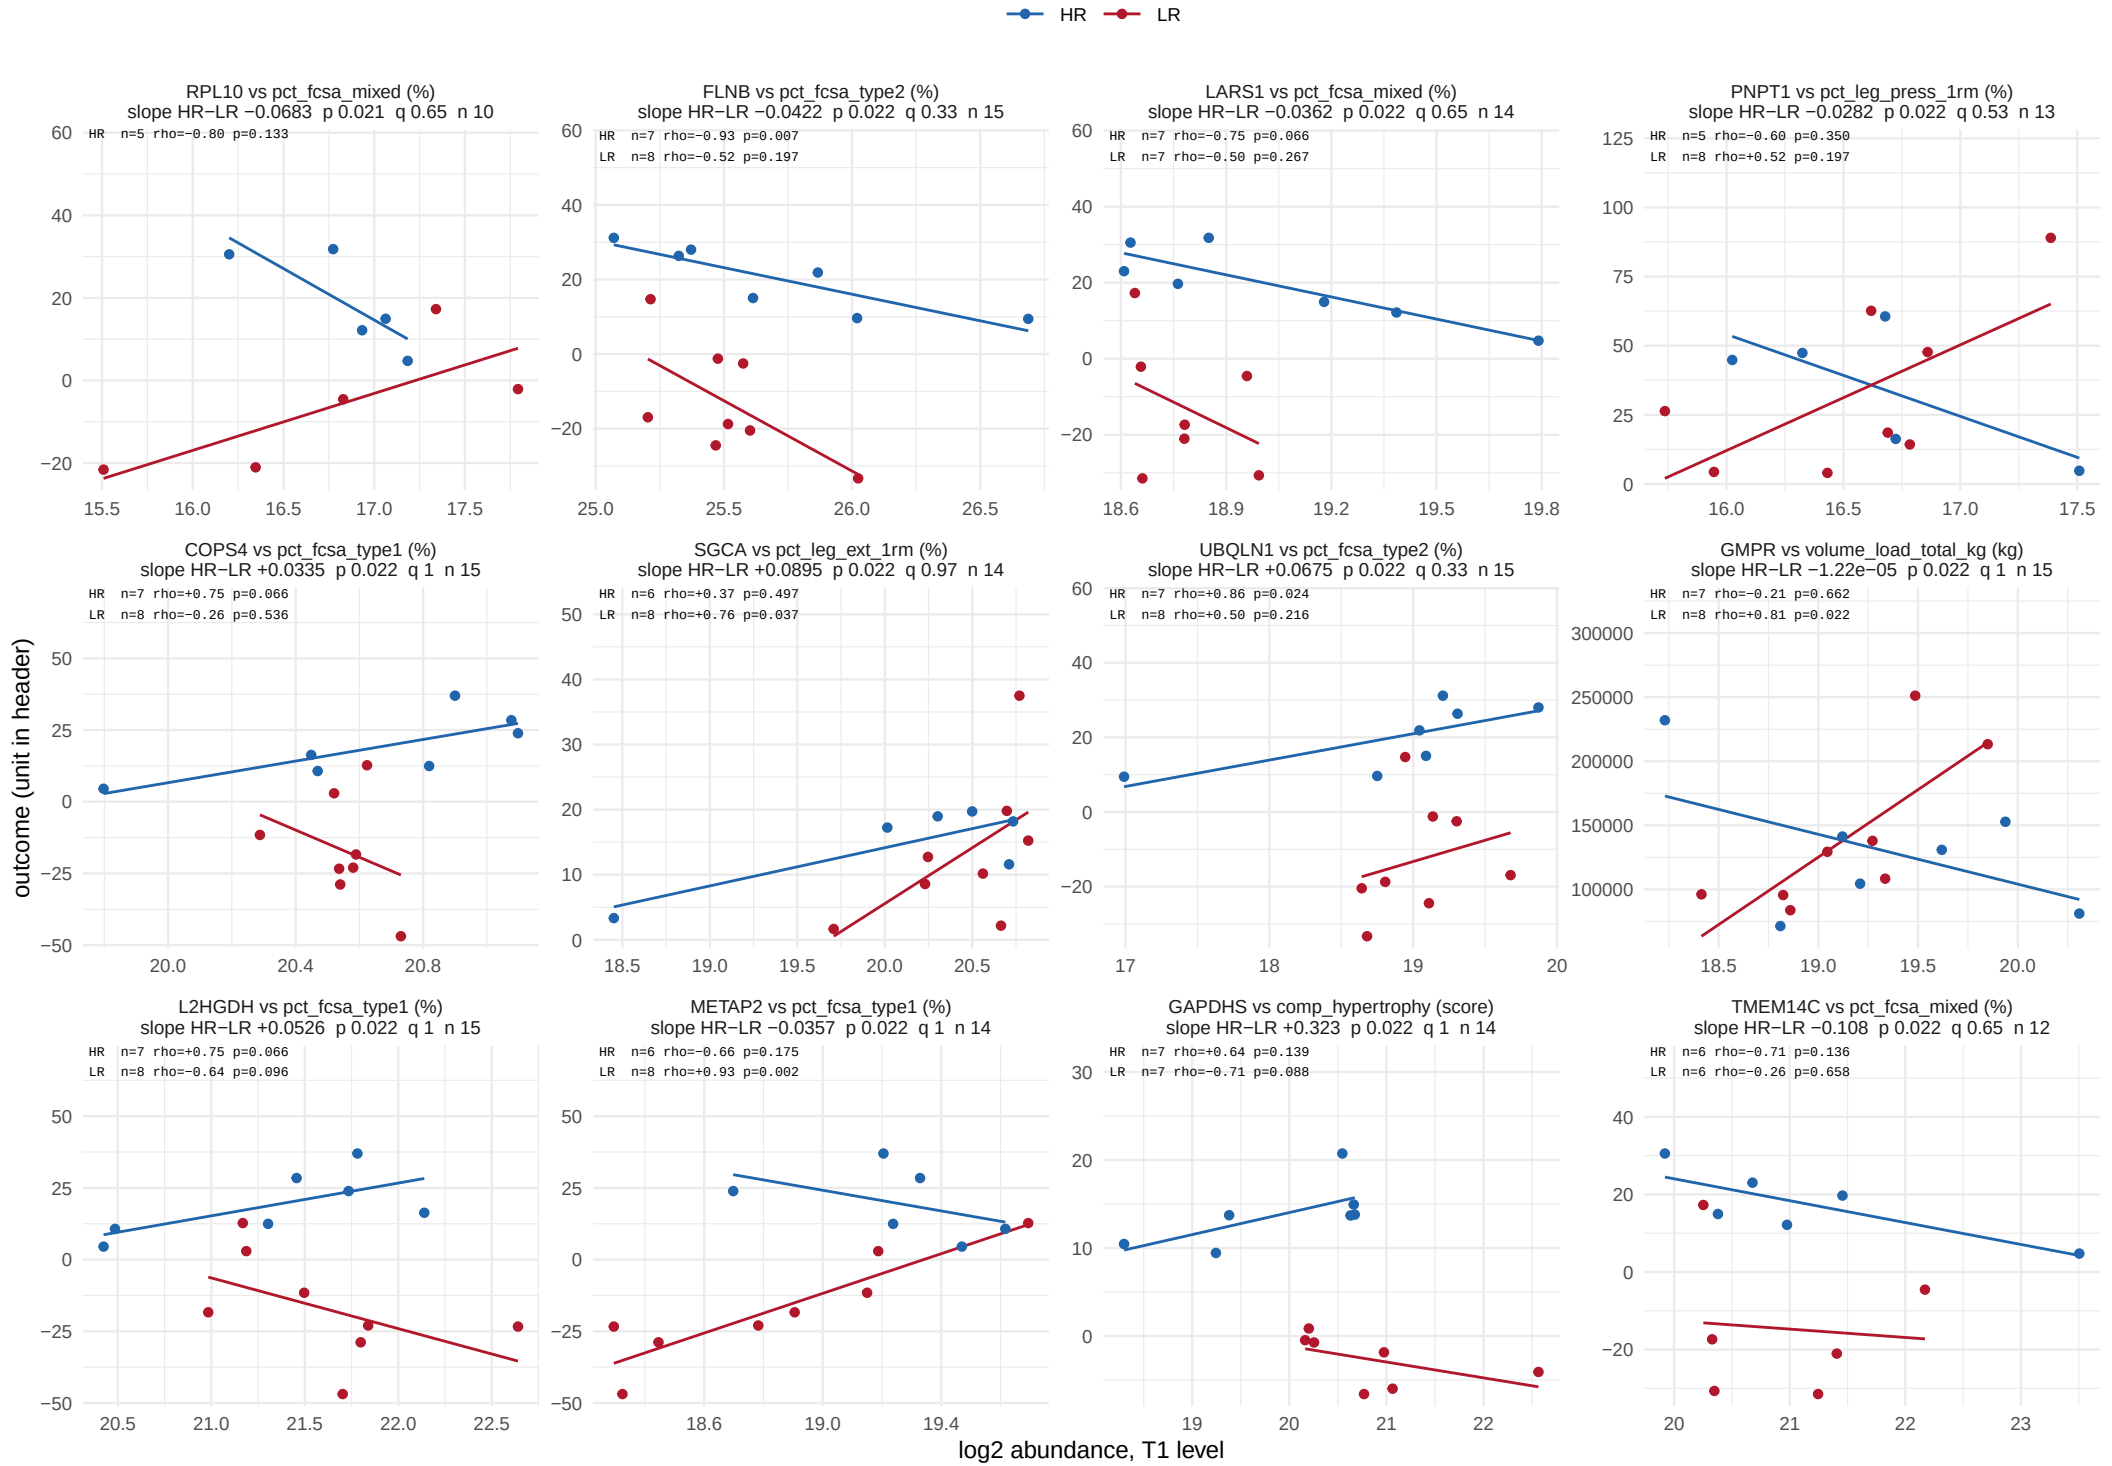

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


721 of 12553 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 29 of 61.

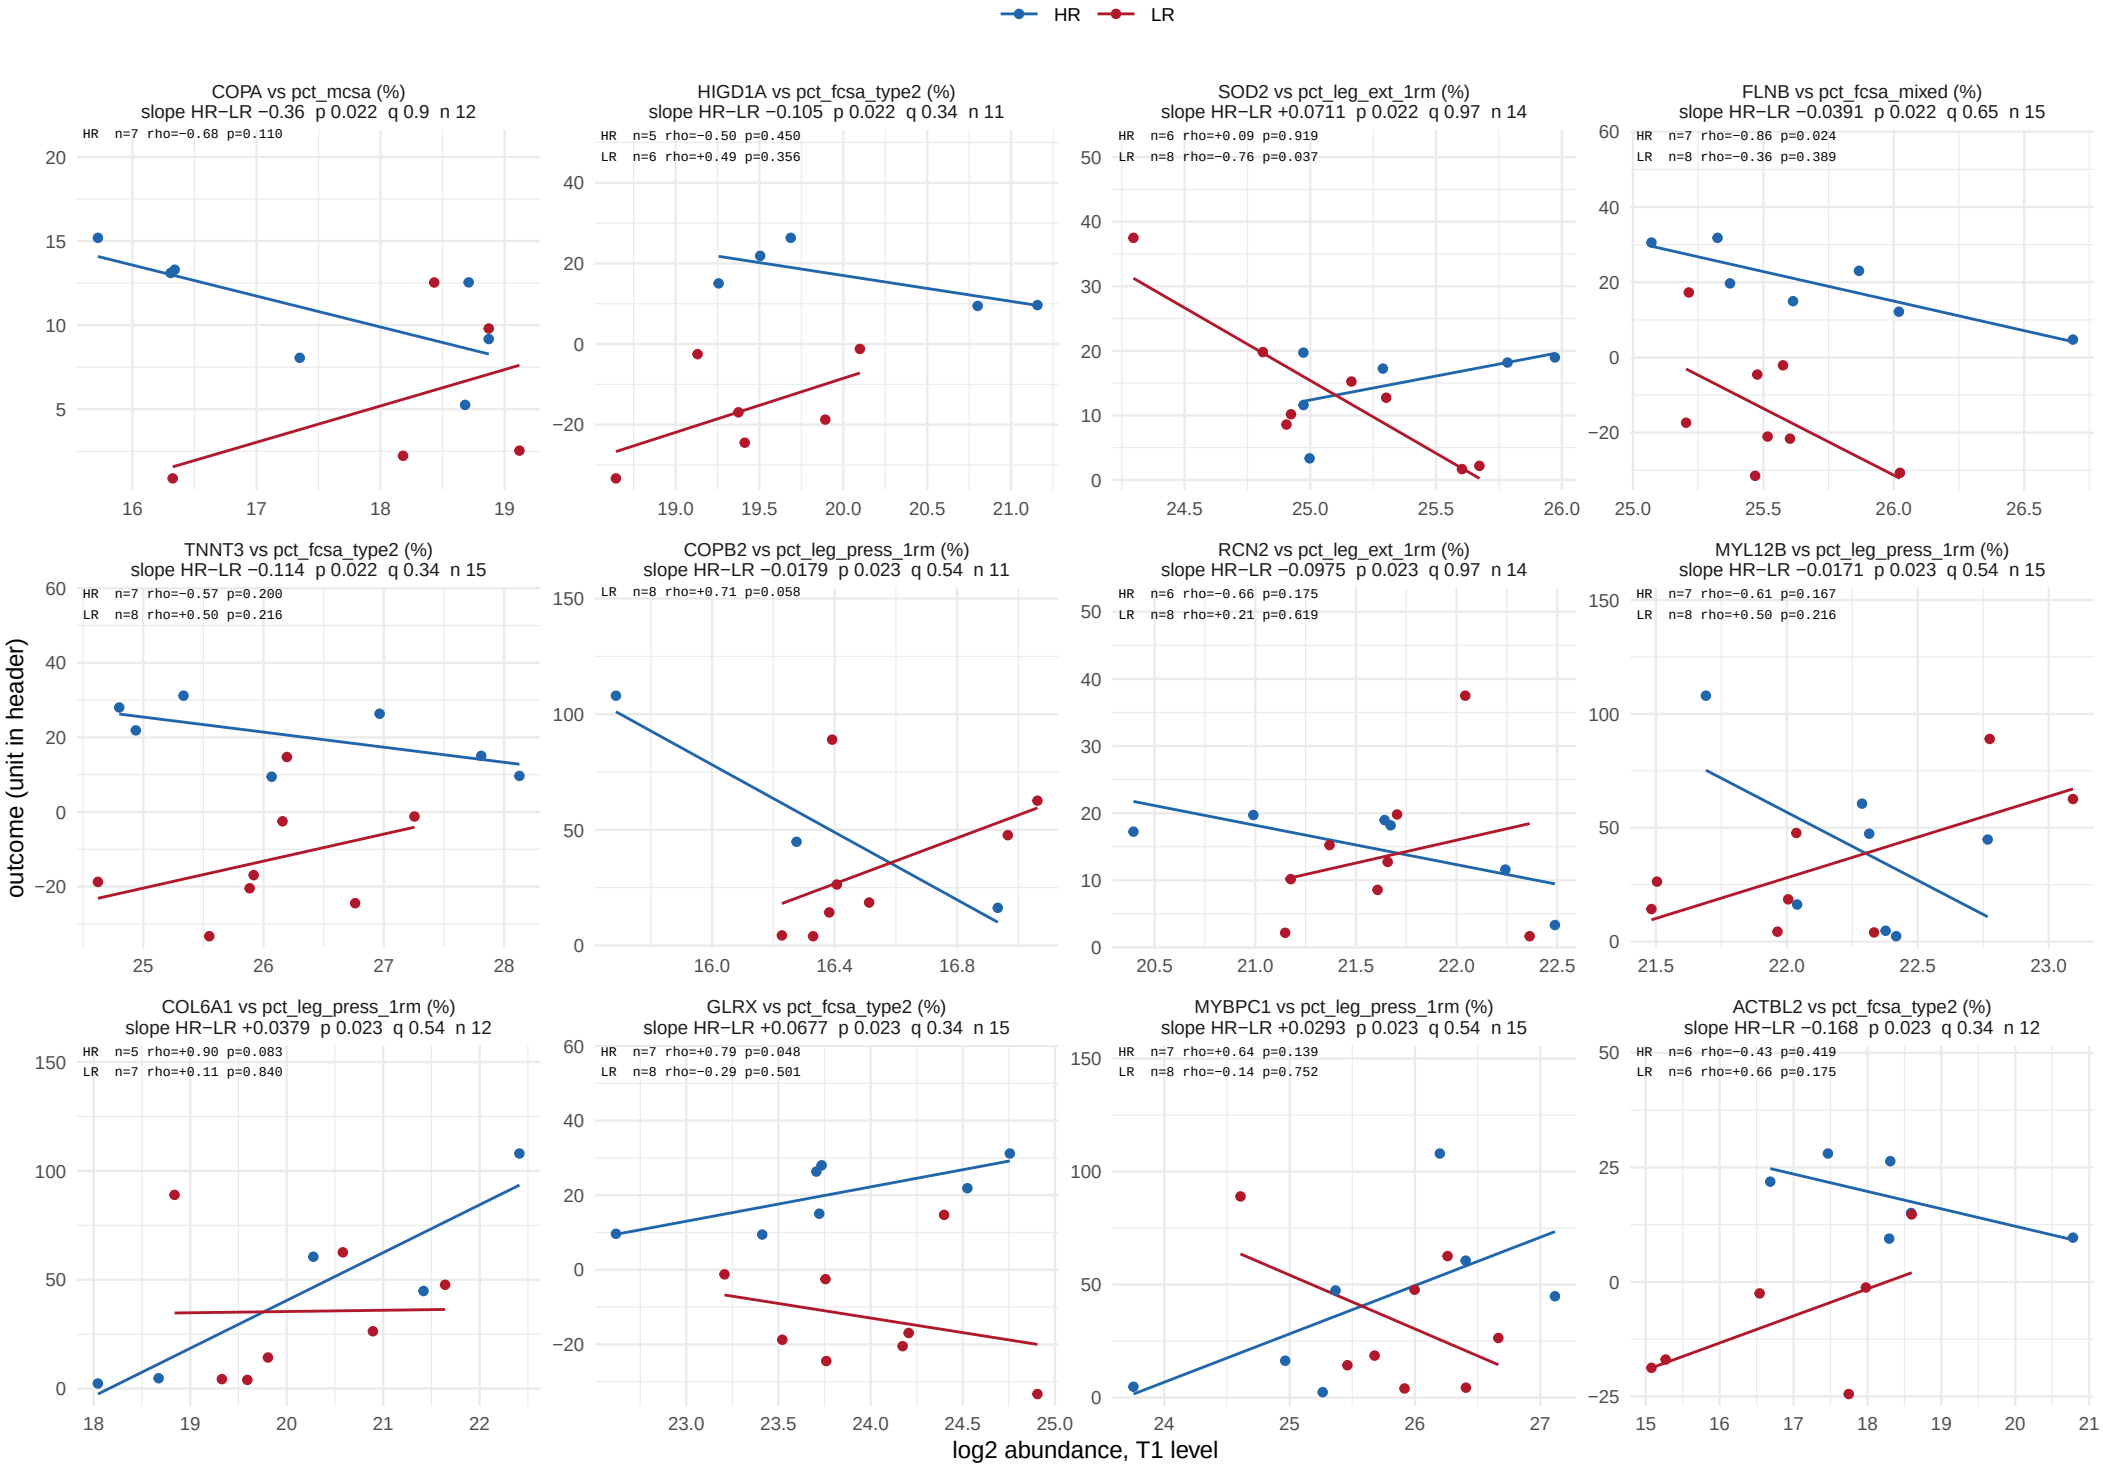

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


721 of 12553 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 30 of 61.

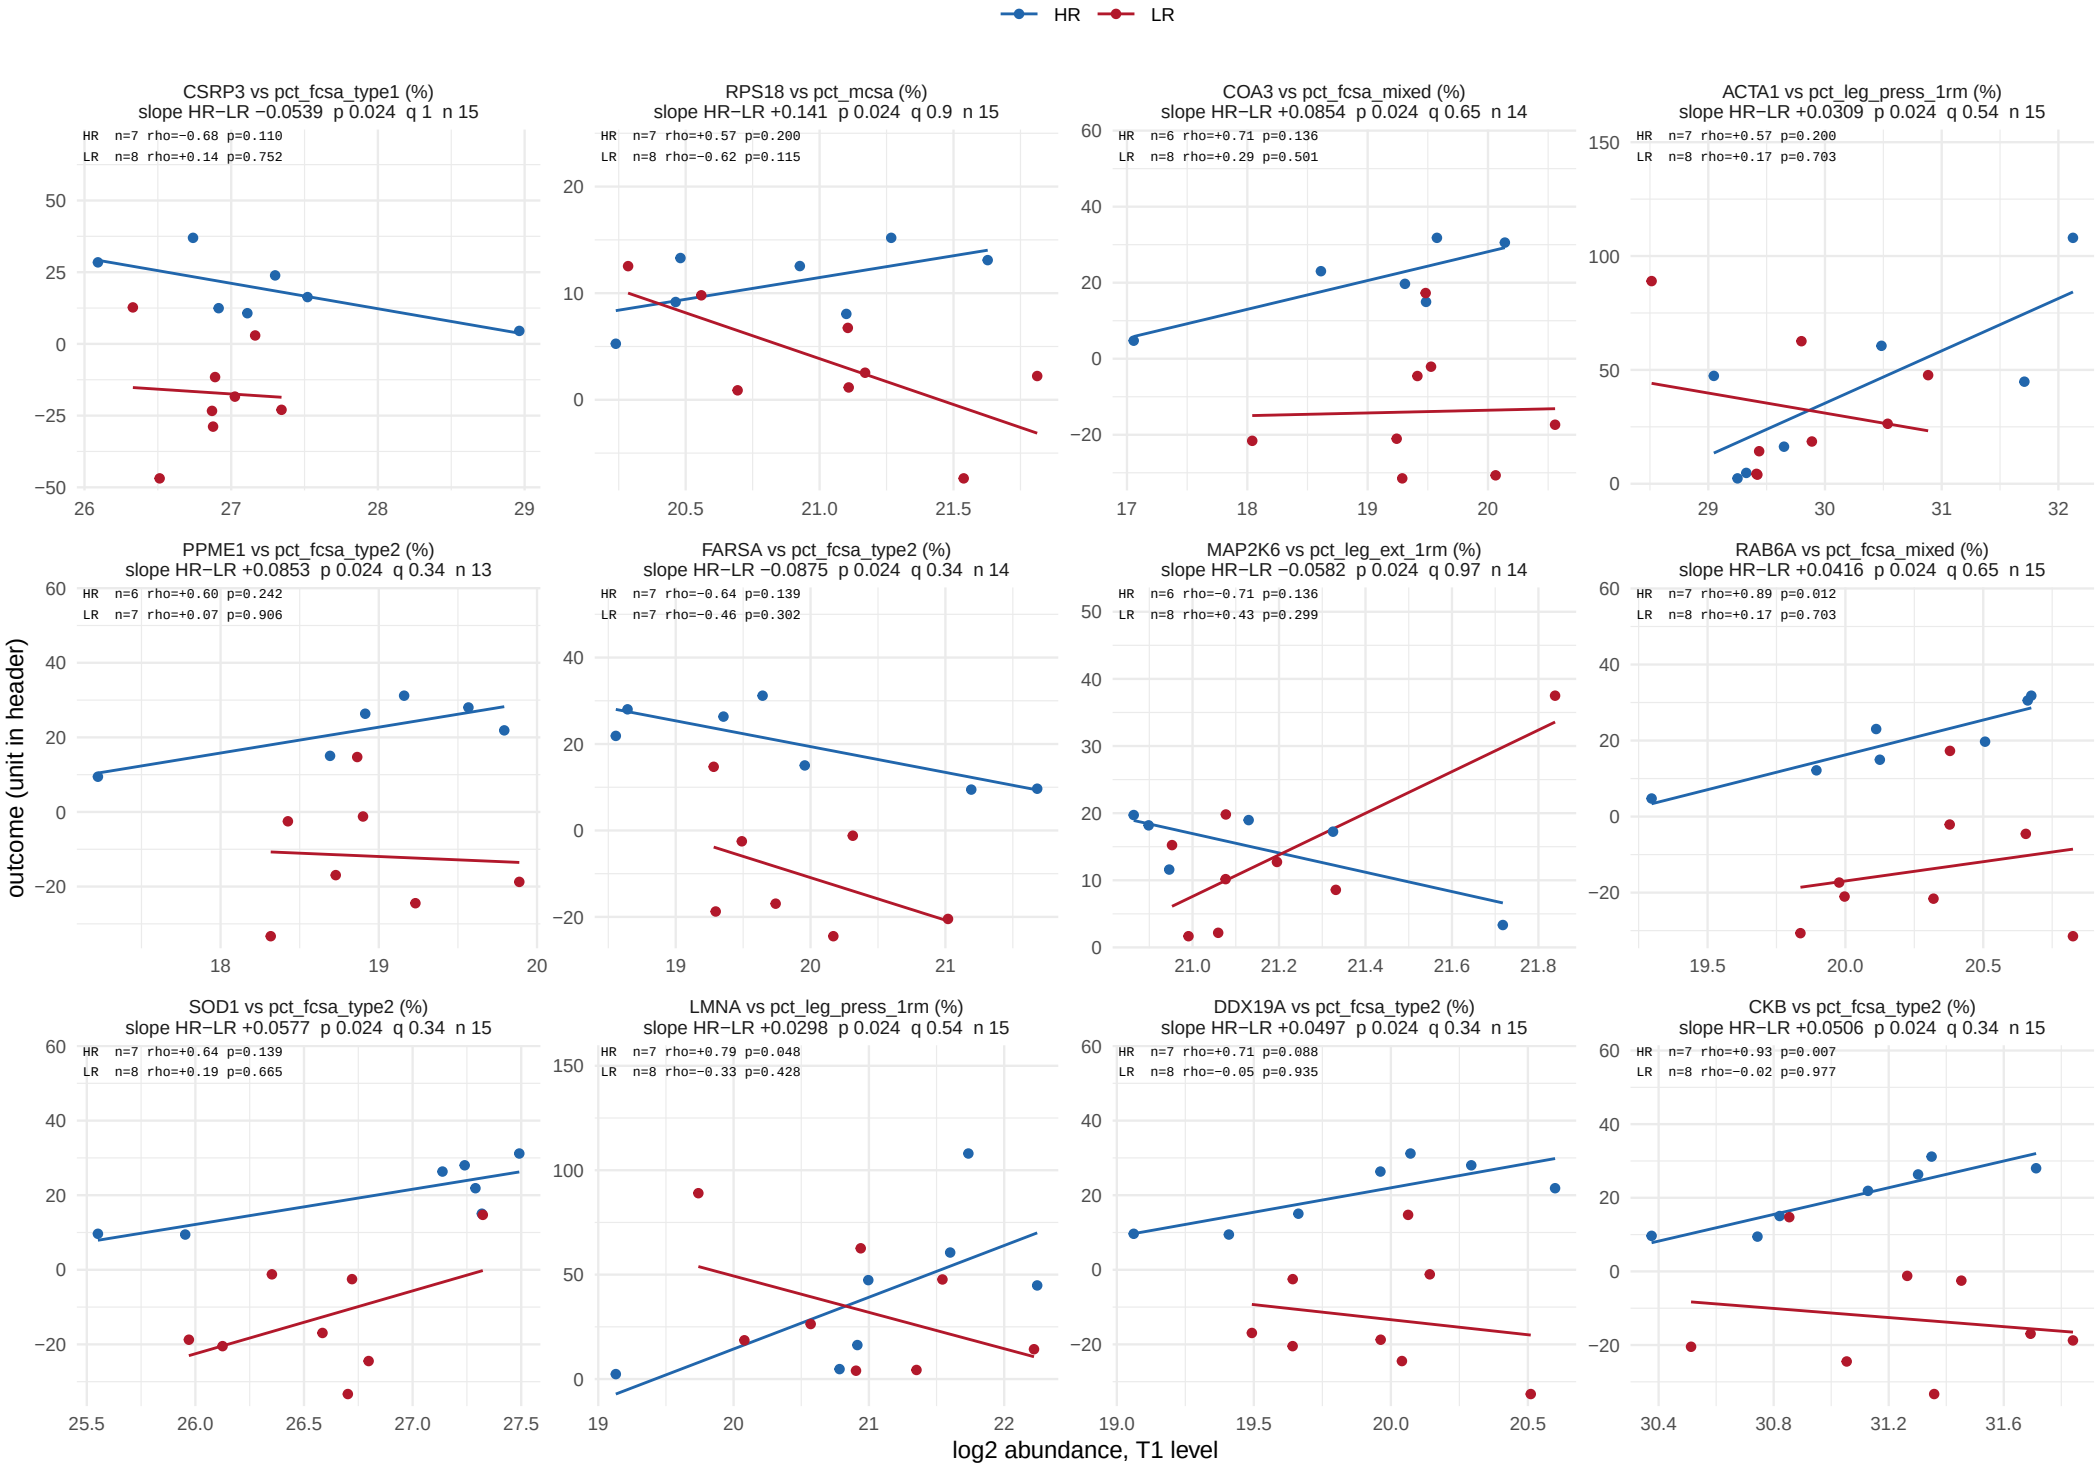

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


721 of 12553 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 31 of 61.

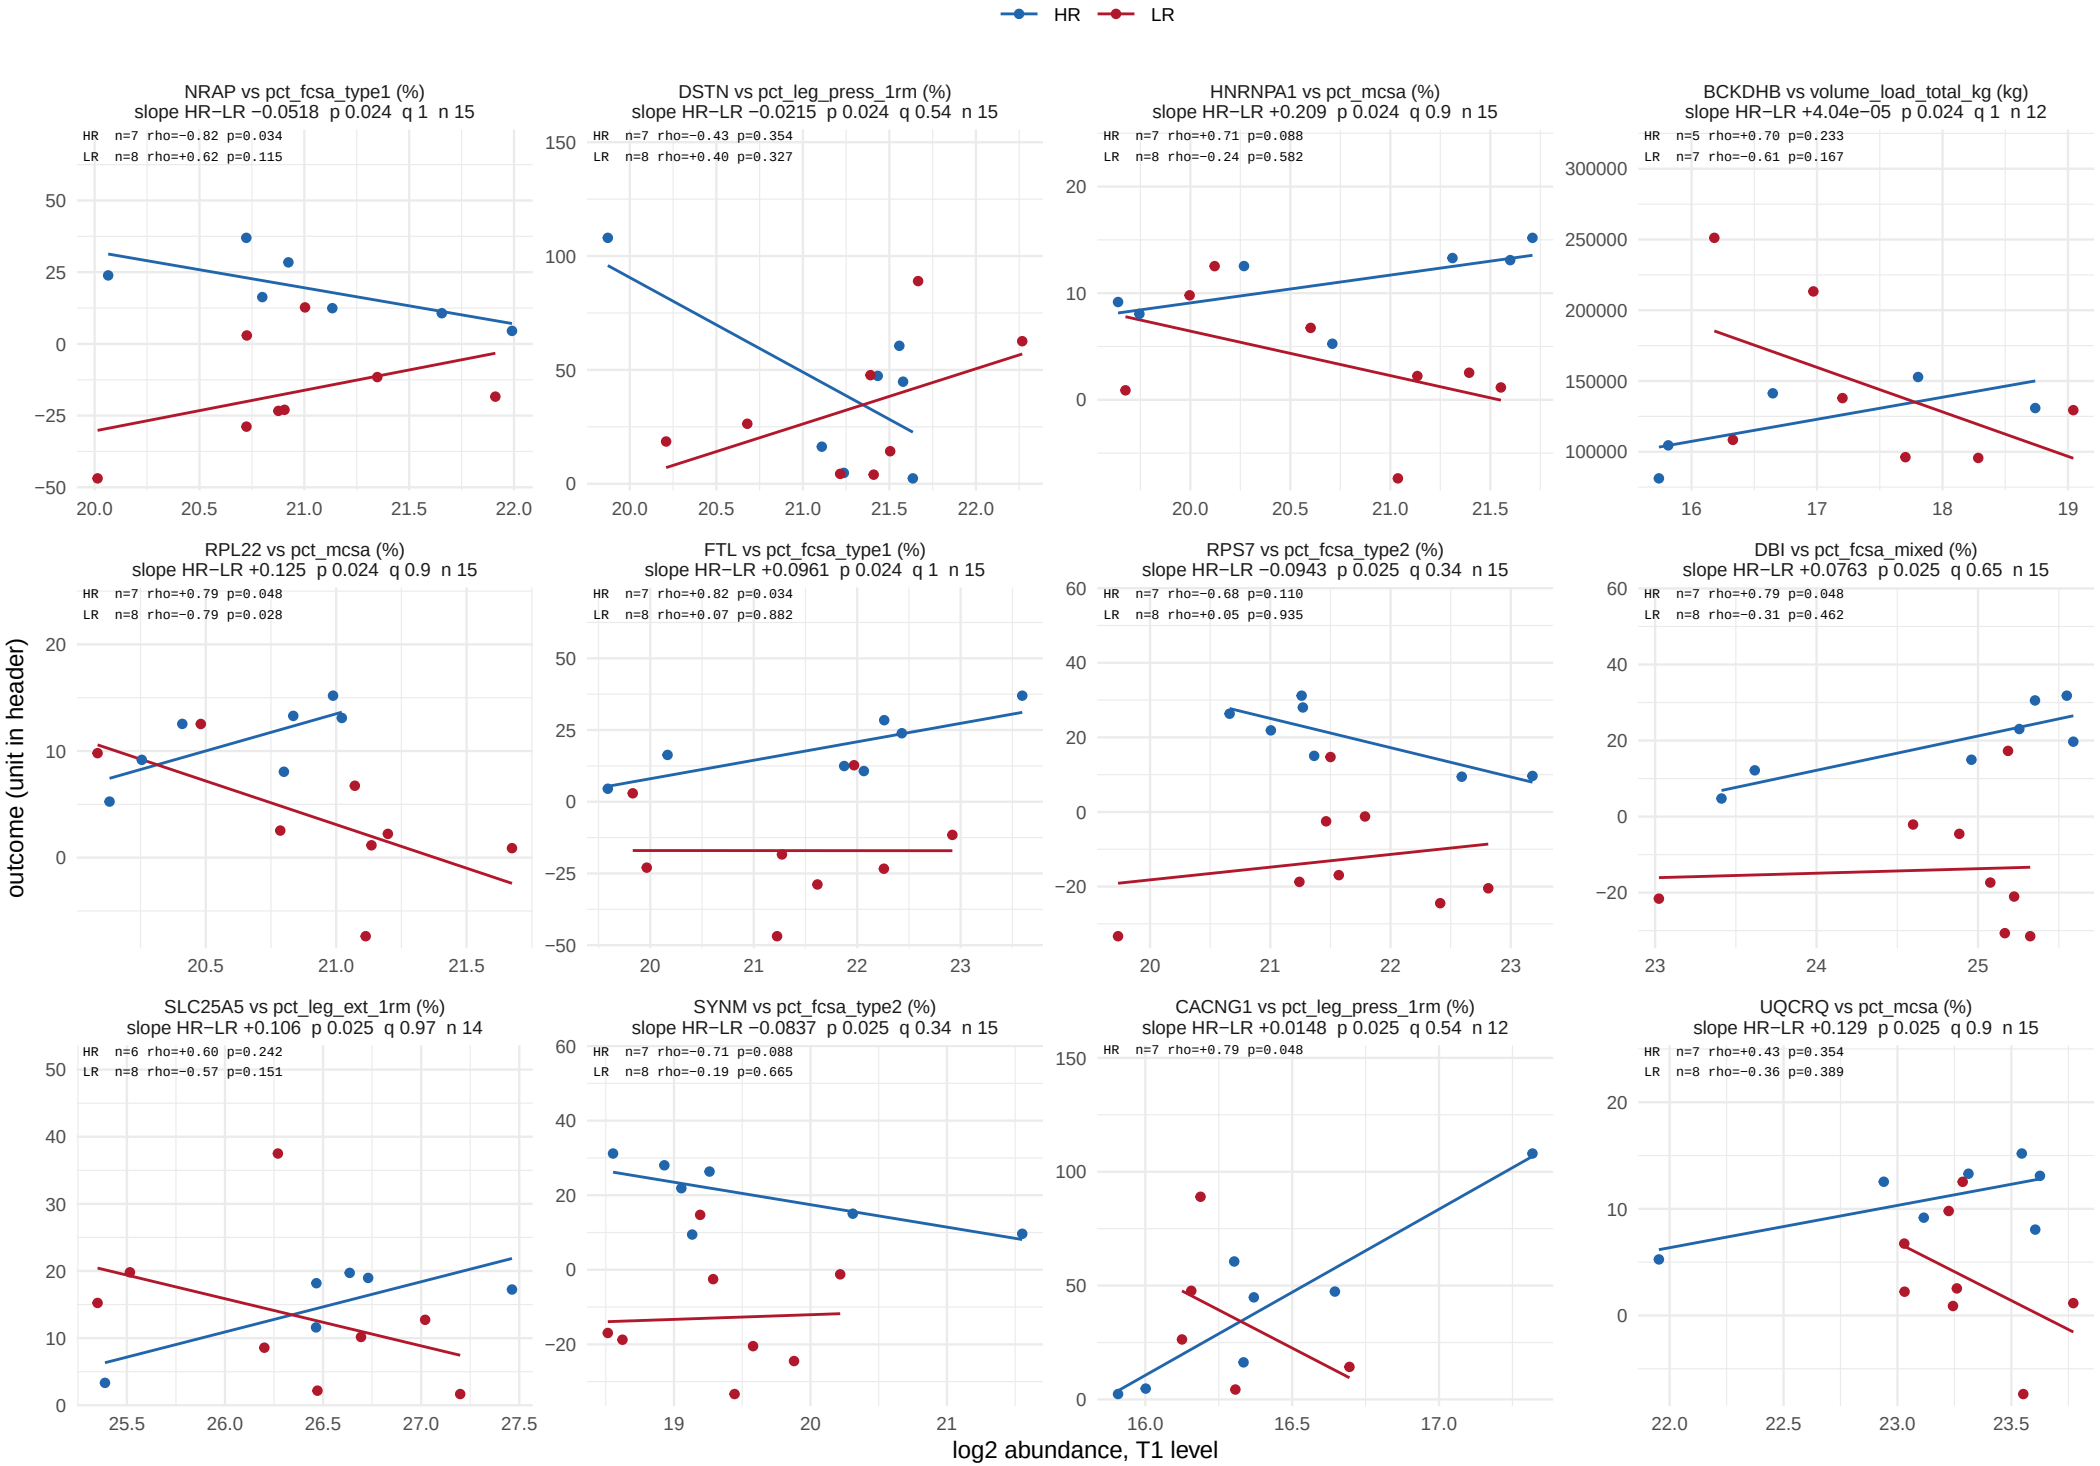

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


721 of 12553 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 32 of 61.

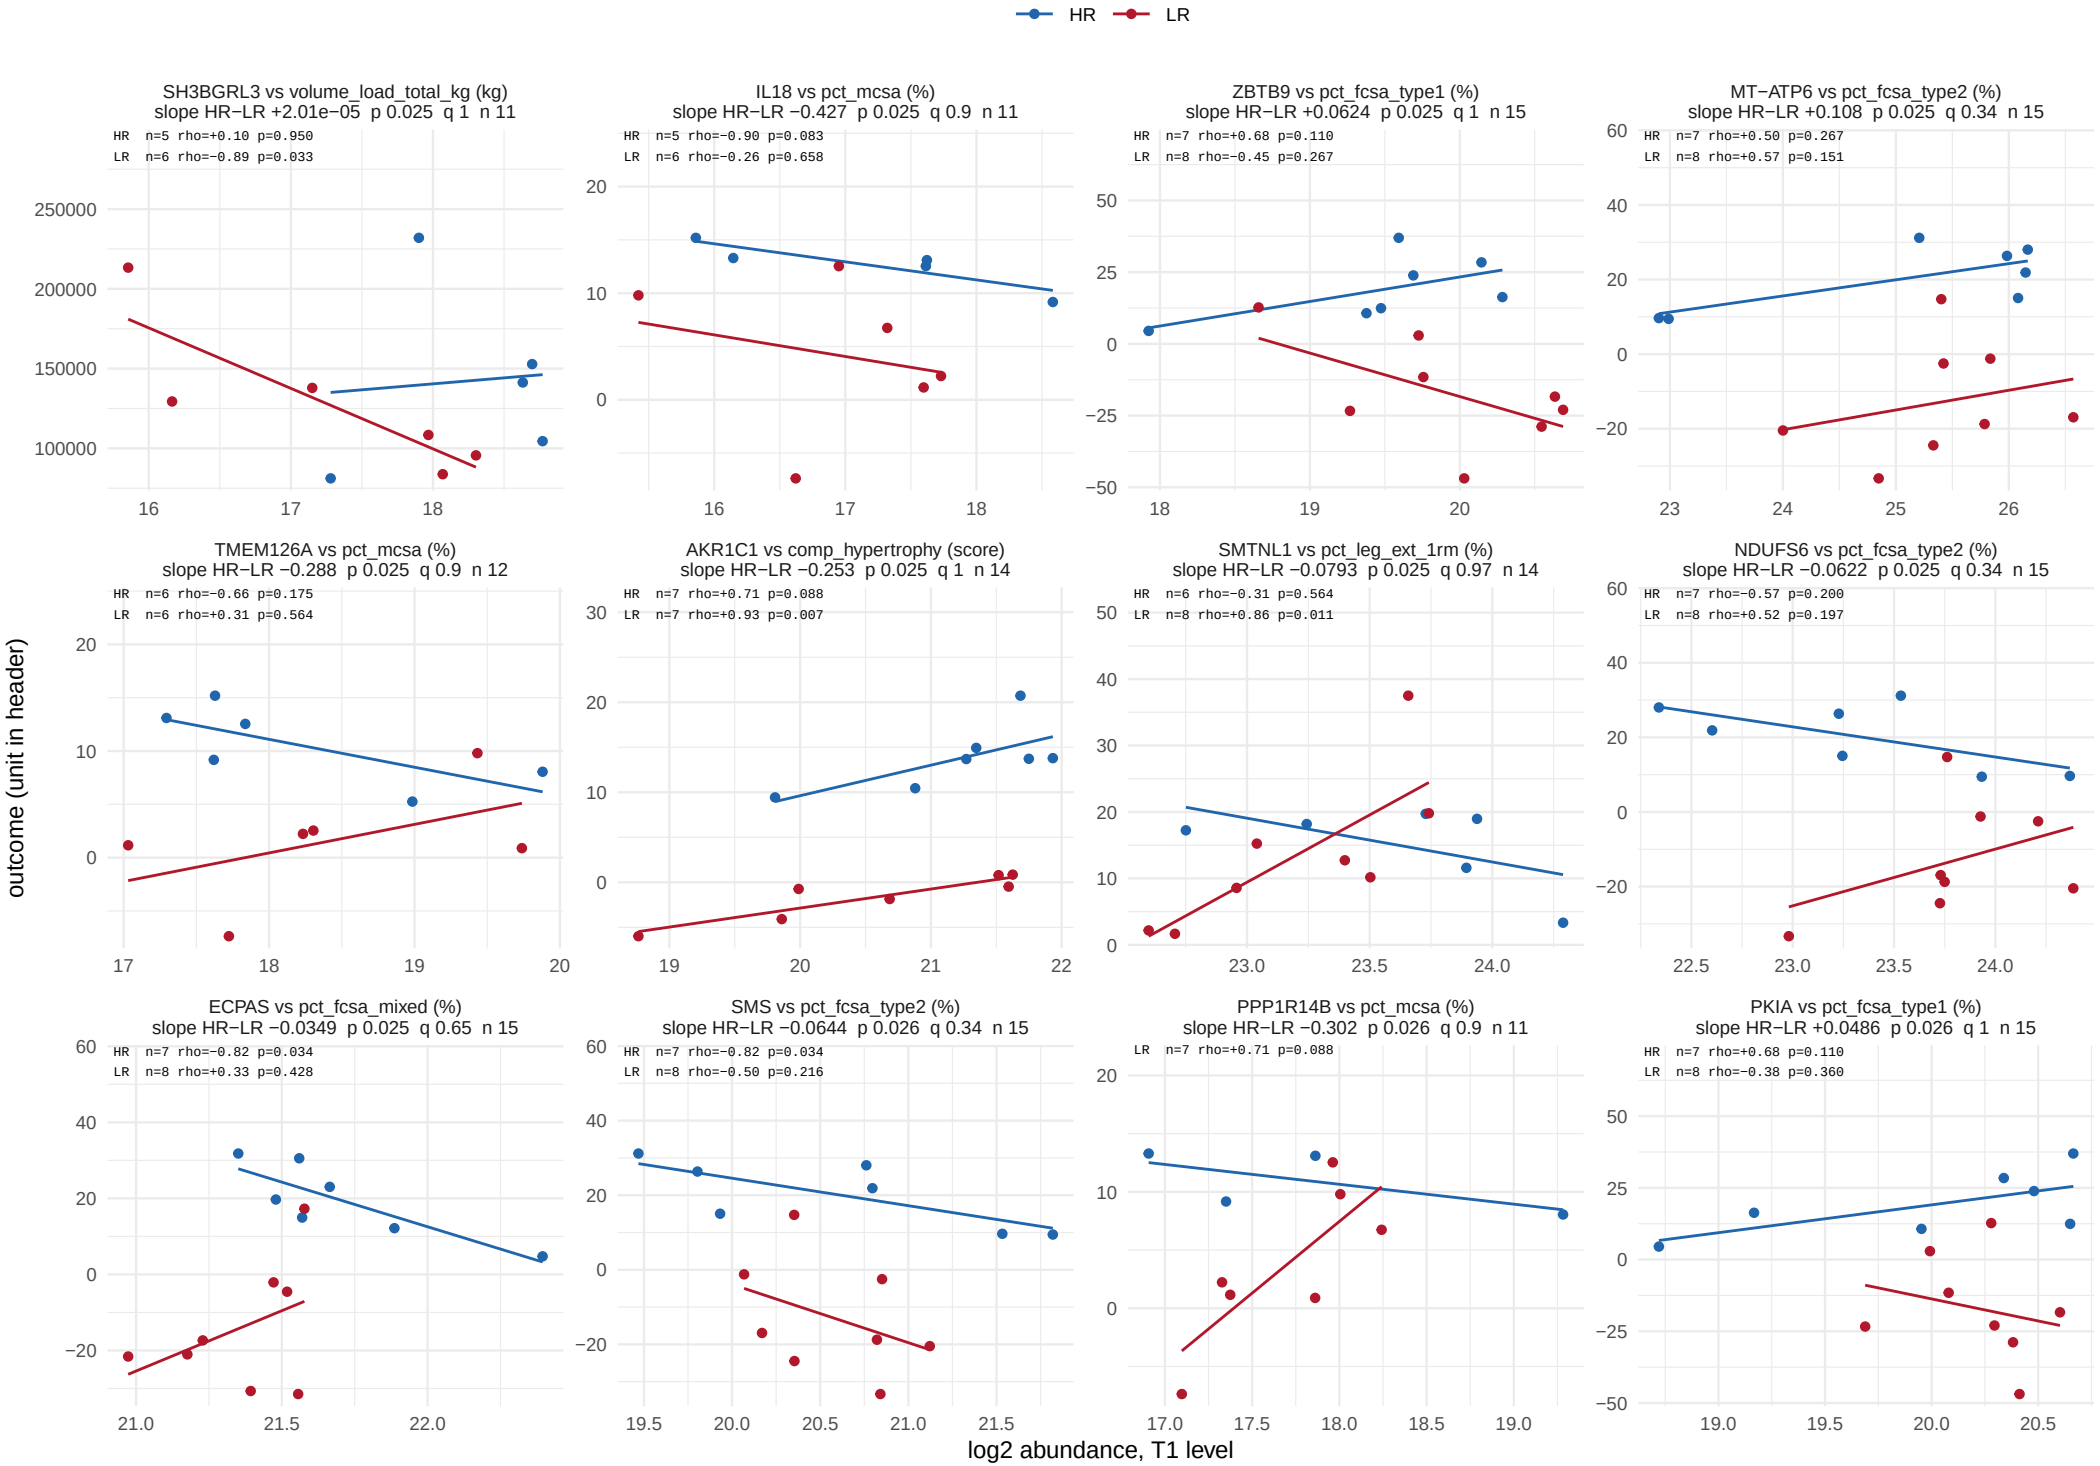

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


721 of 12553 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 33 of 61.

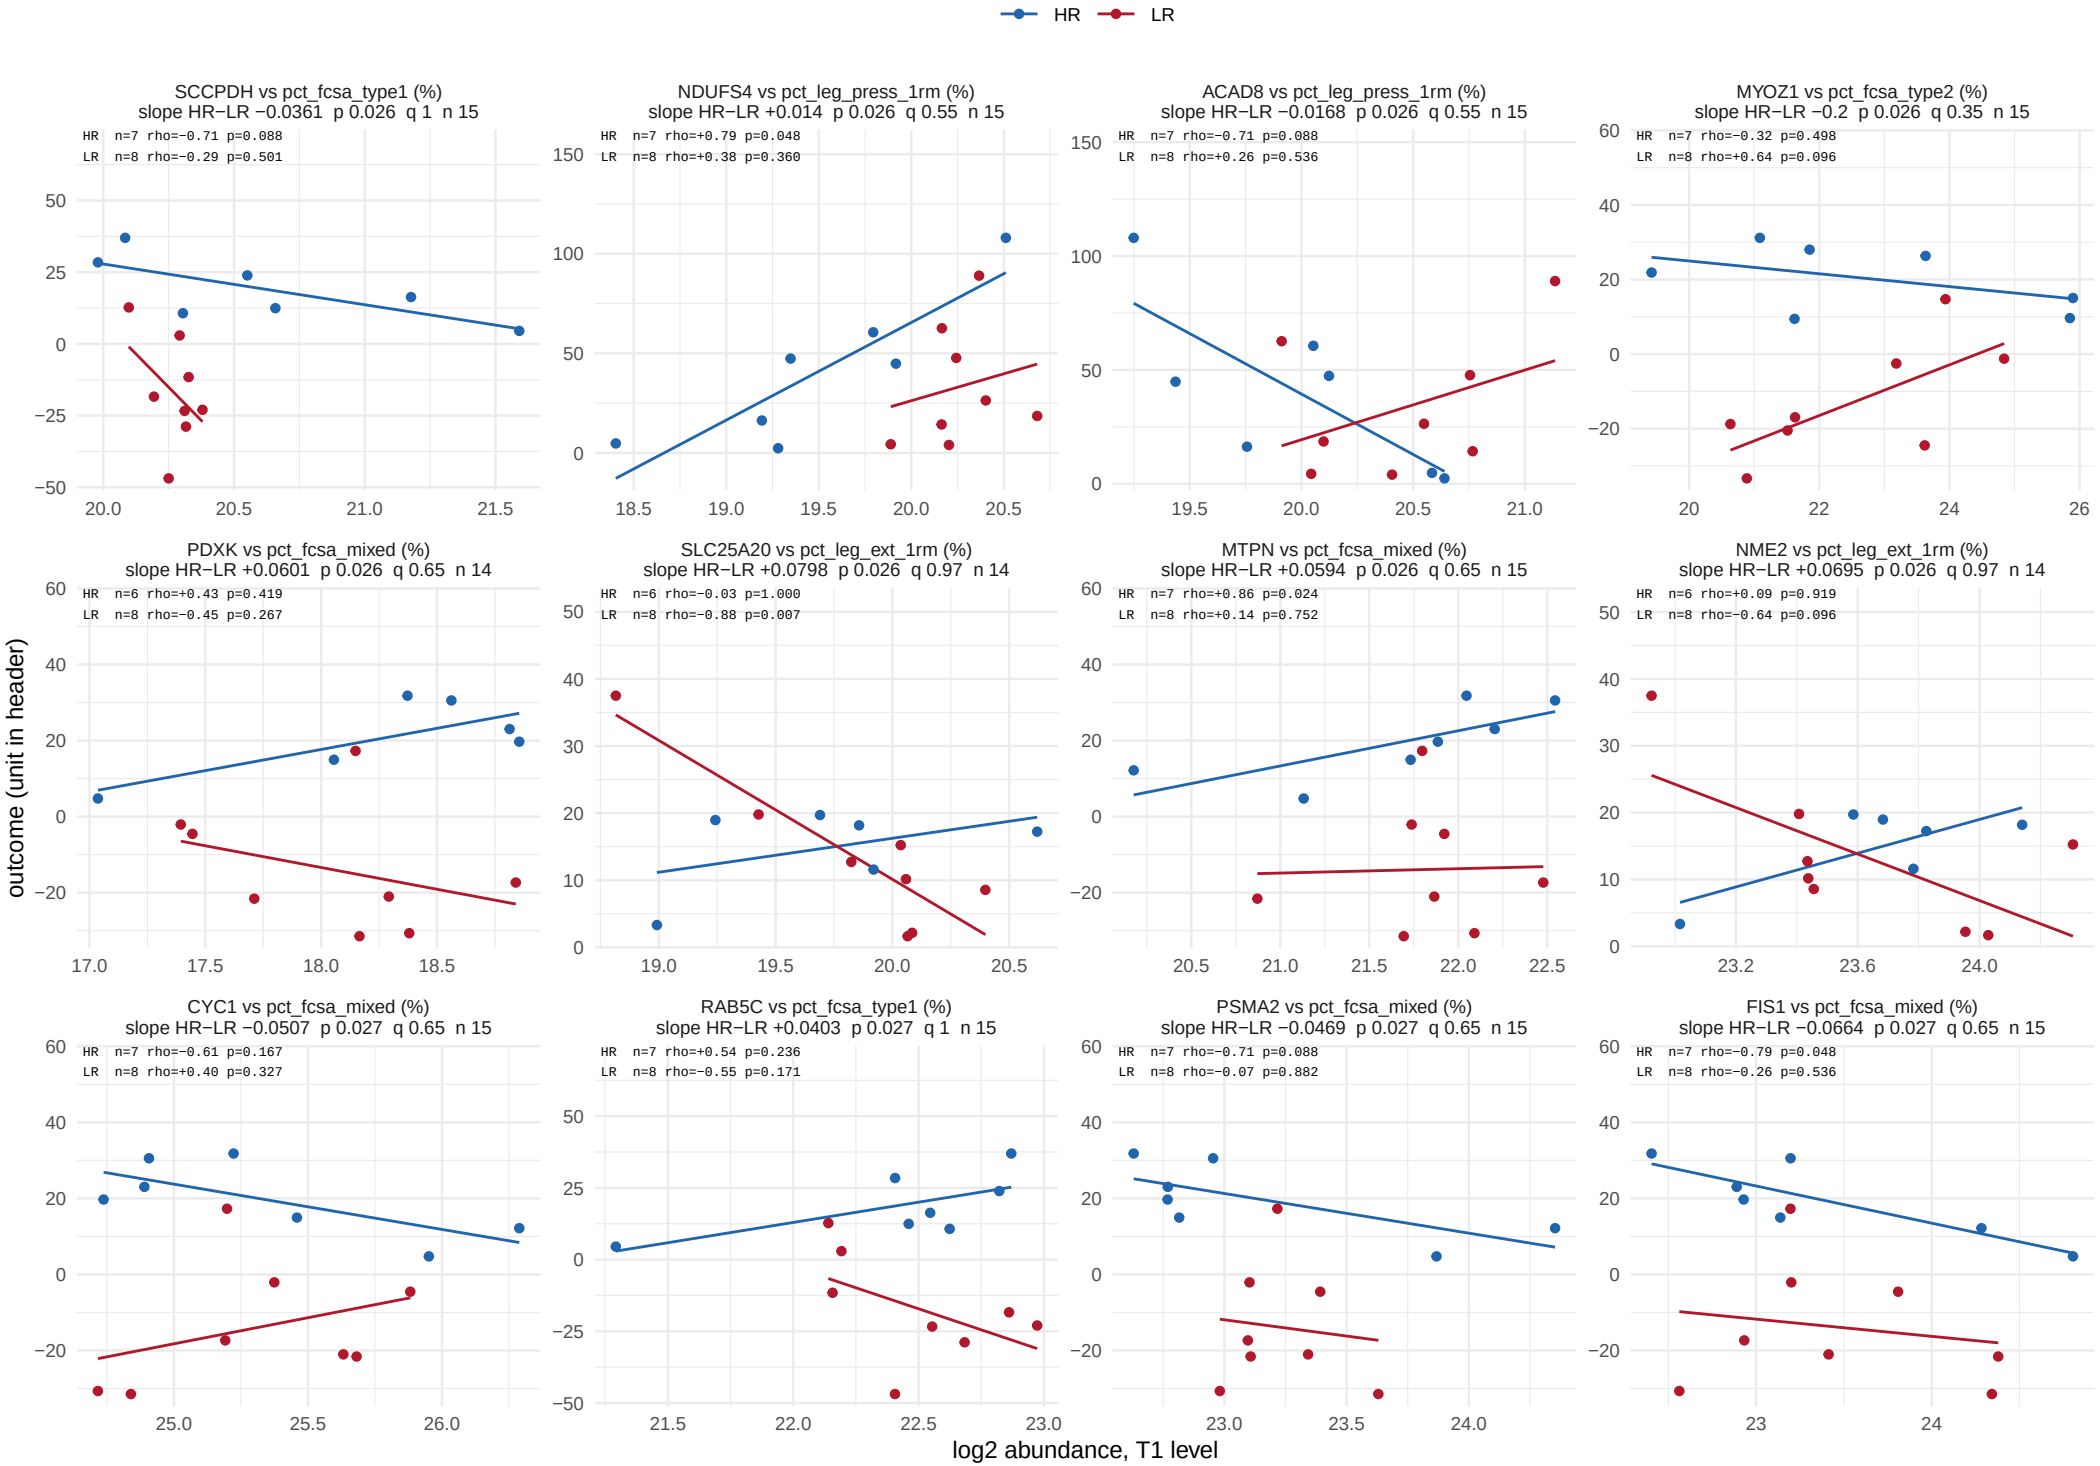

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


721 of 12553 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 34 of 61.

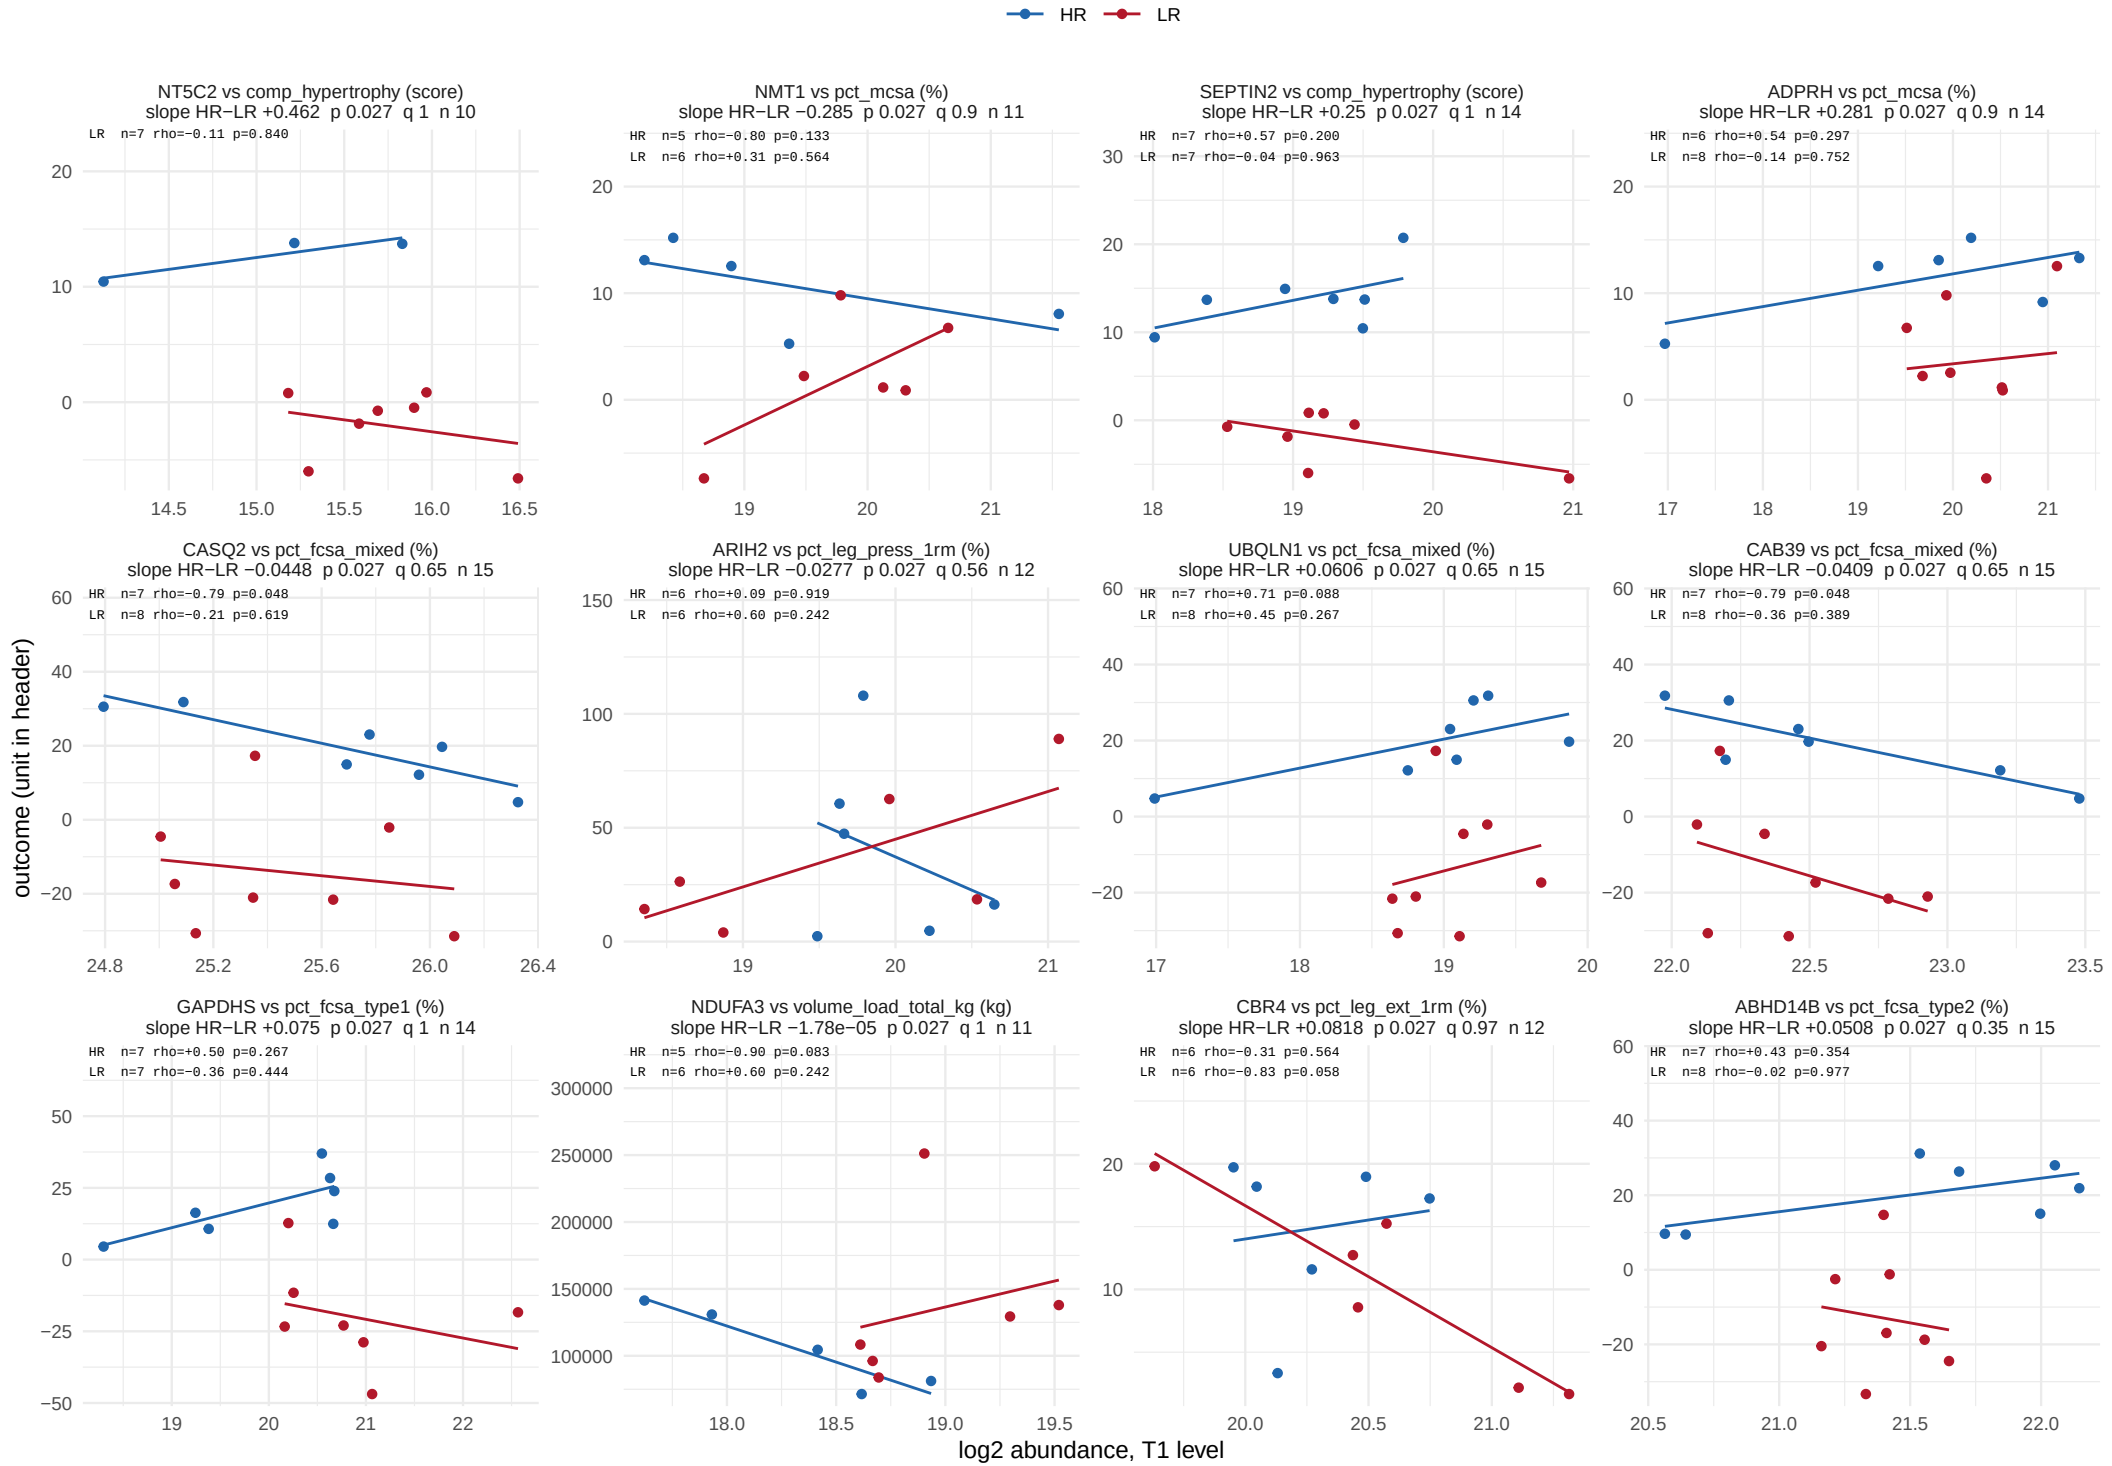

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


721 of 12553 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 35 of 61.

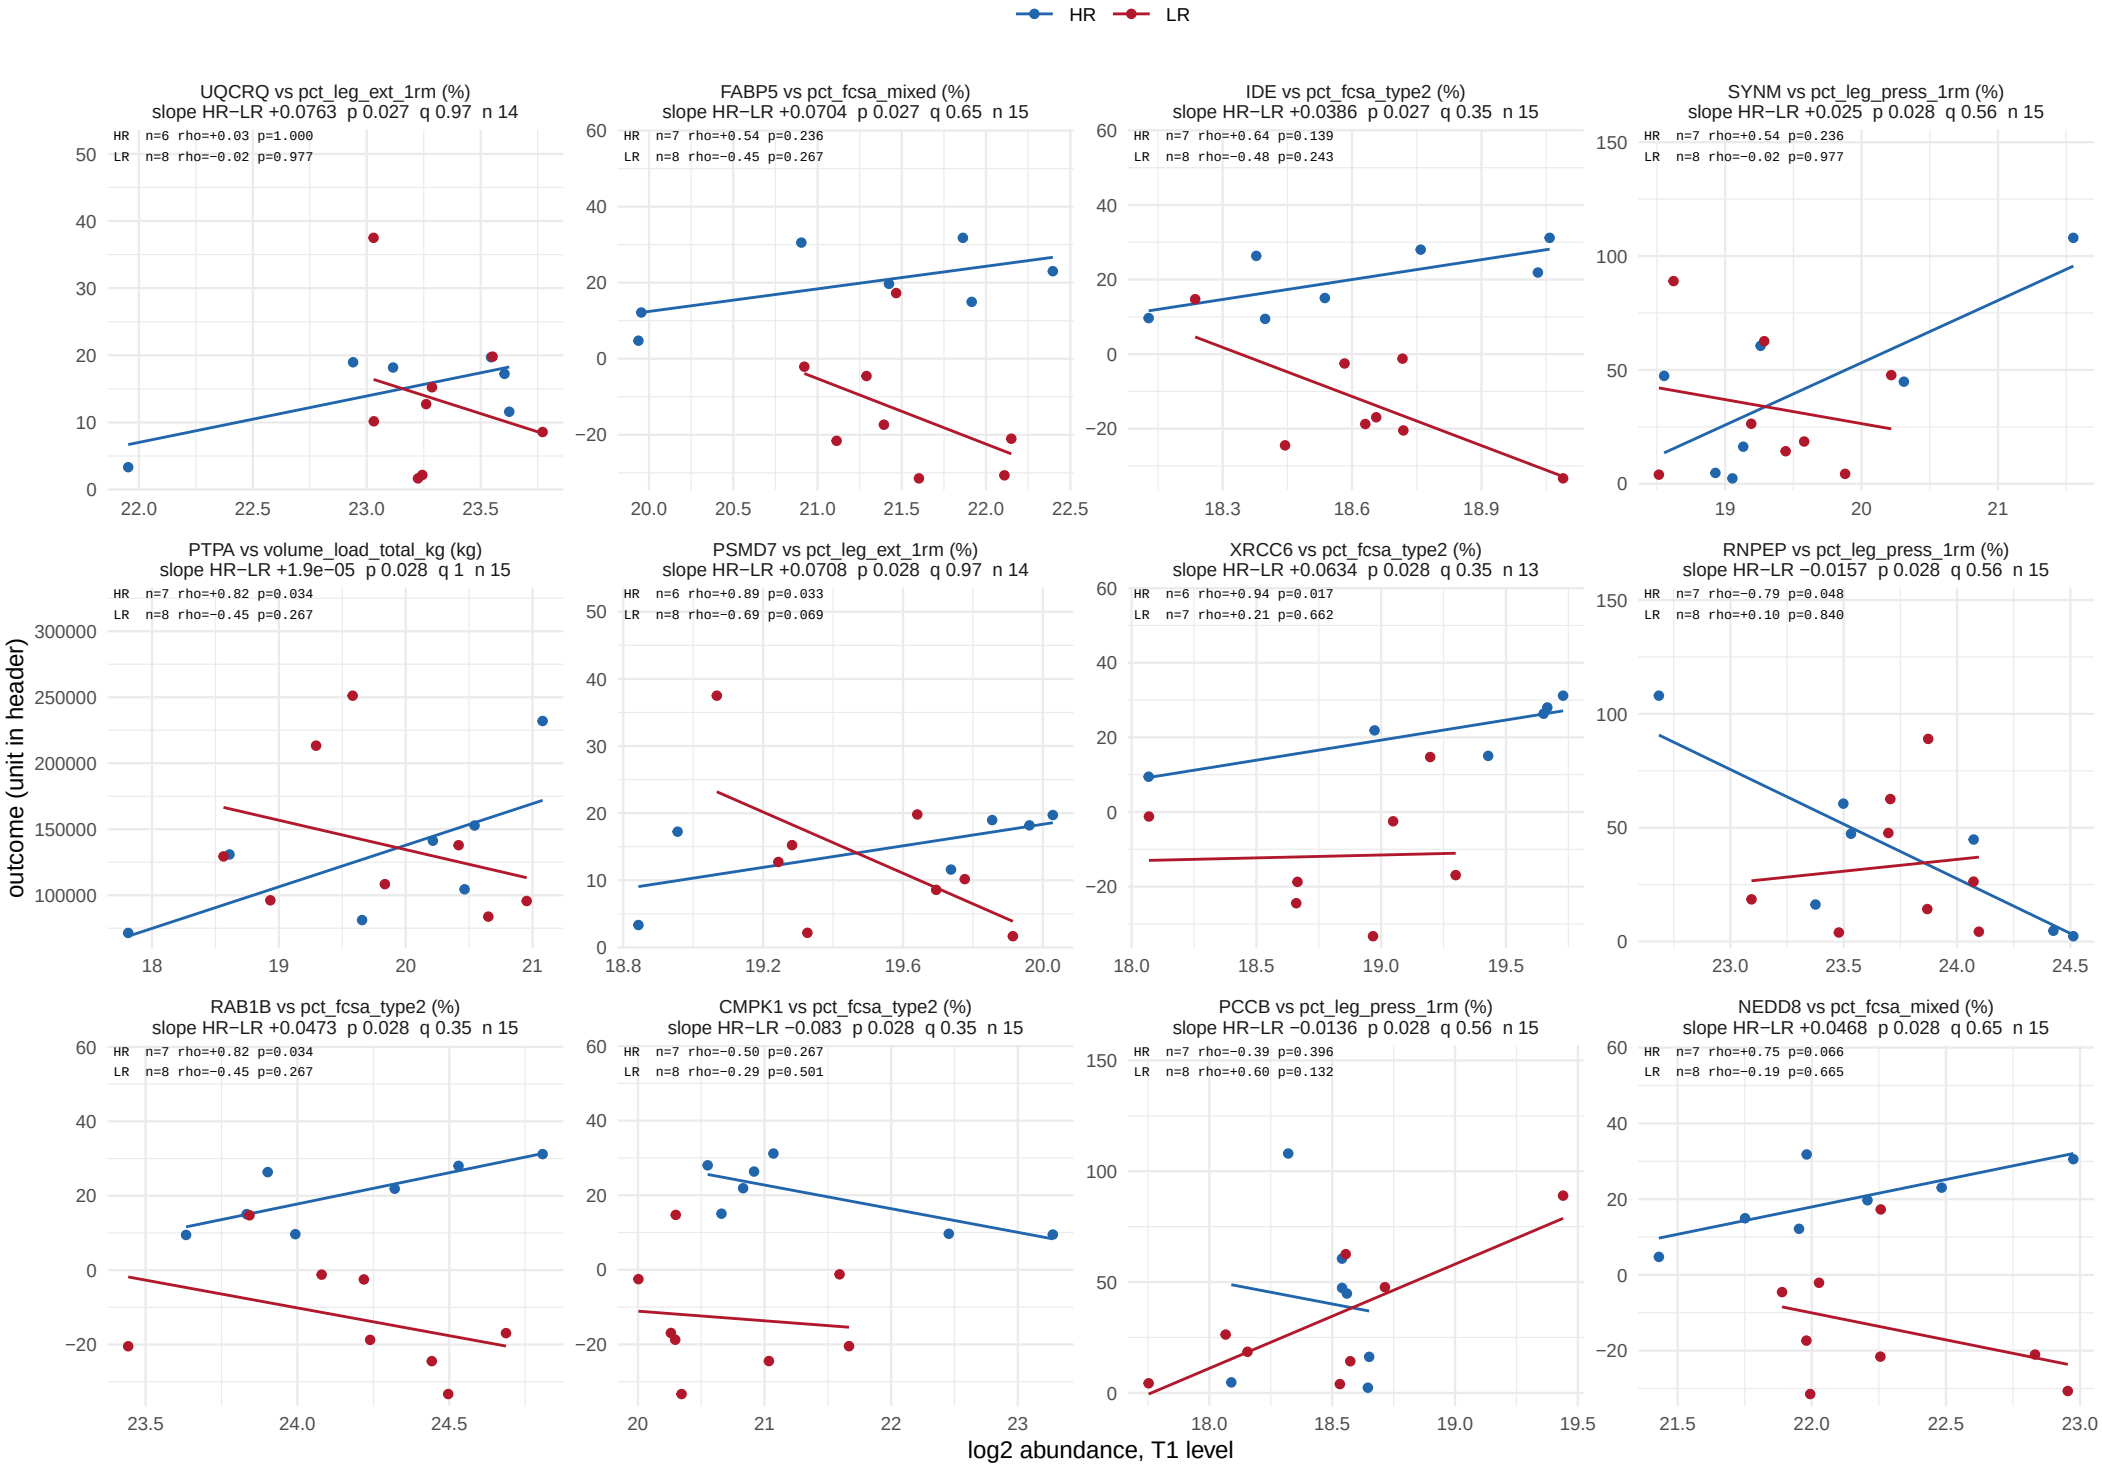

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


721 of 12553 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 36 of 61.

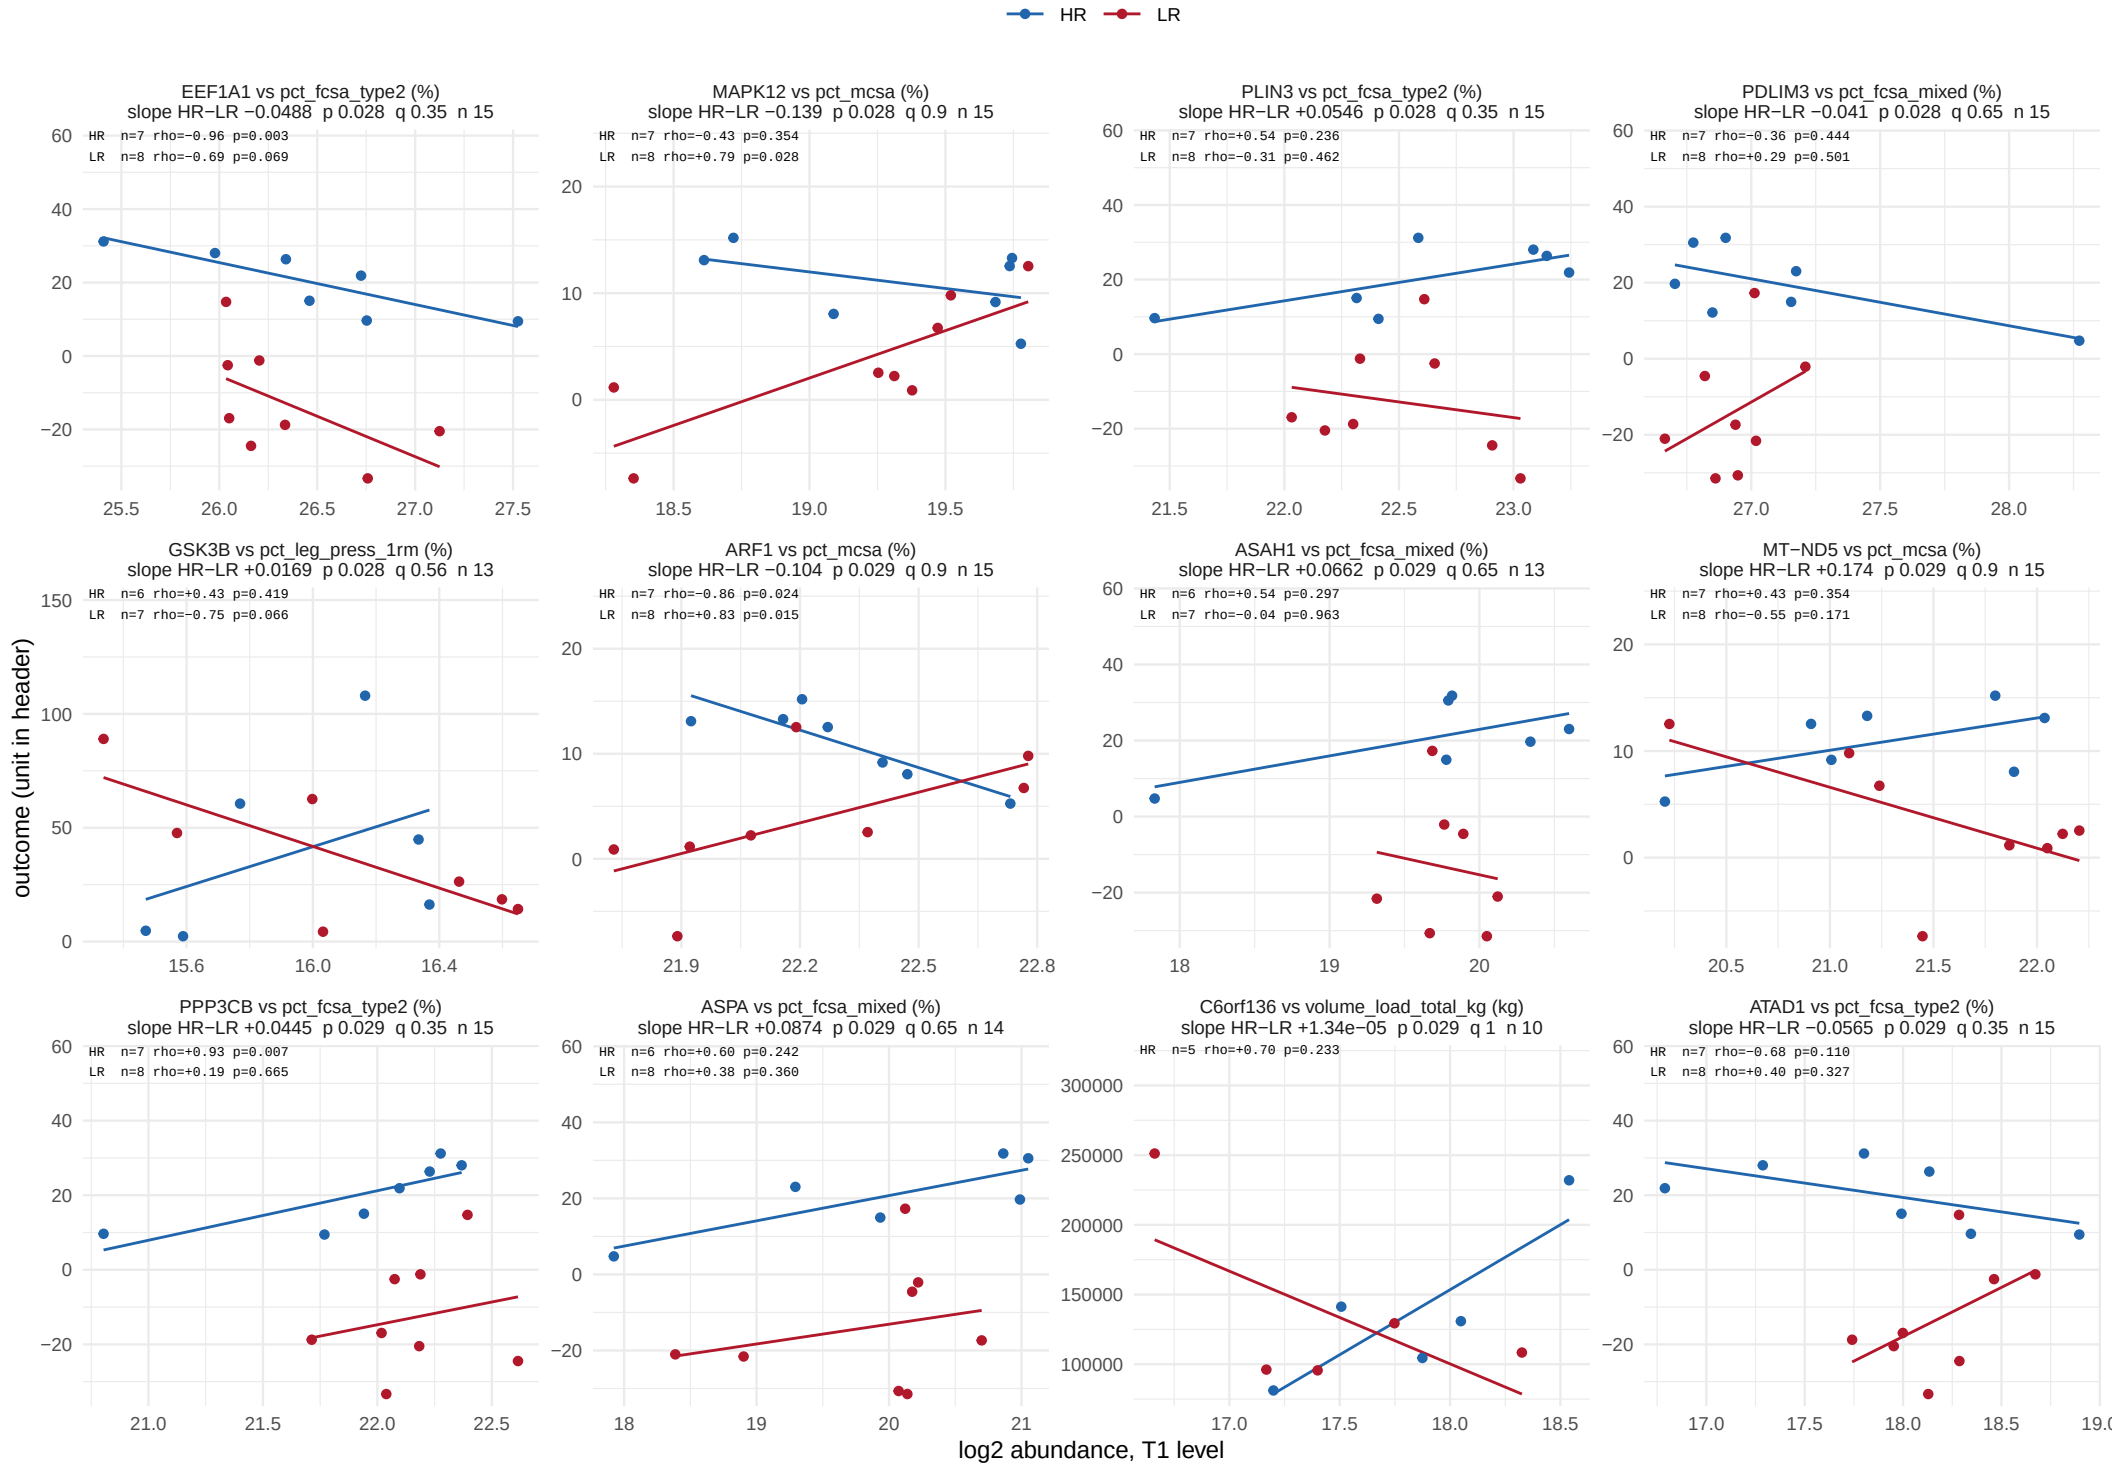

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


721 of 12553 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 37 of 61.

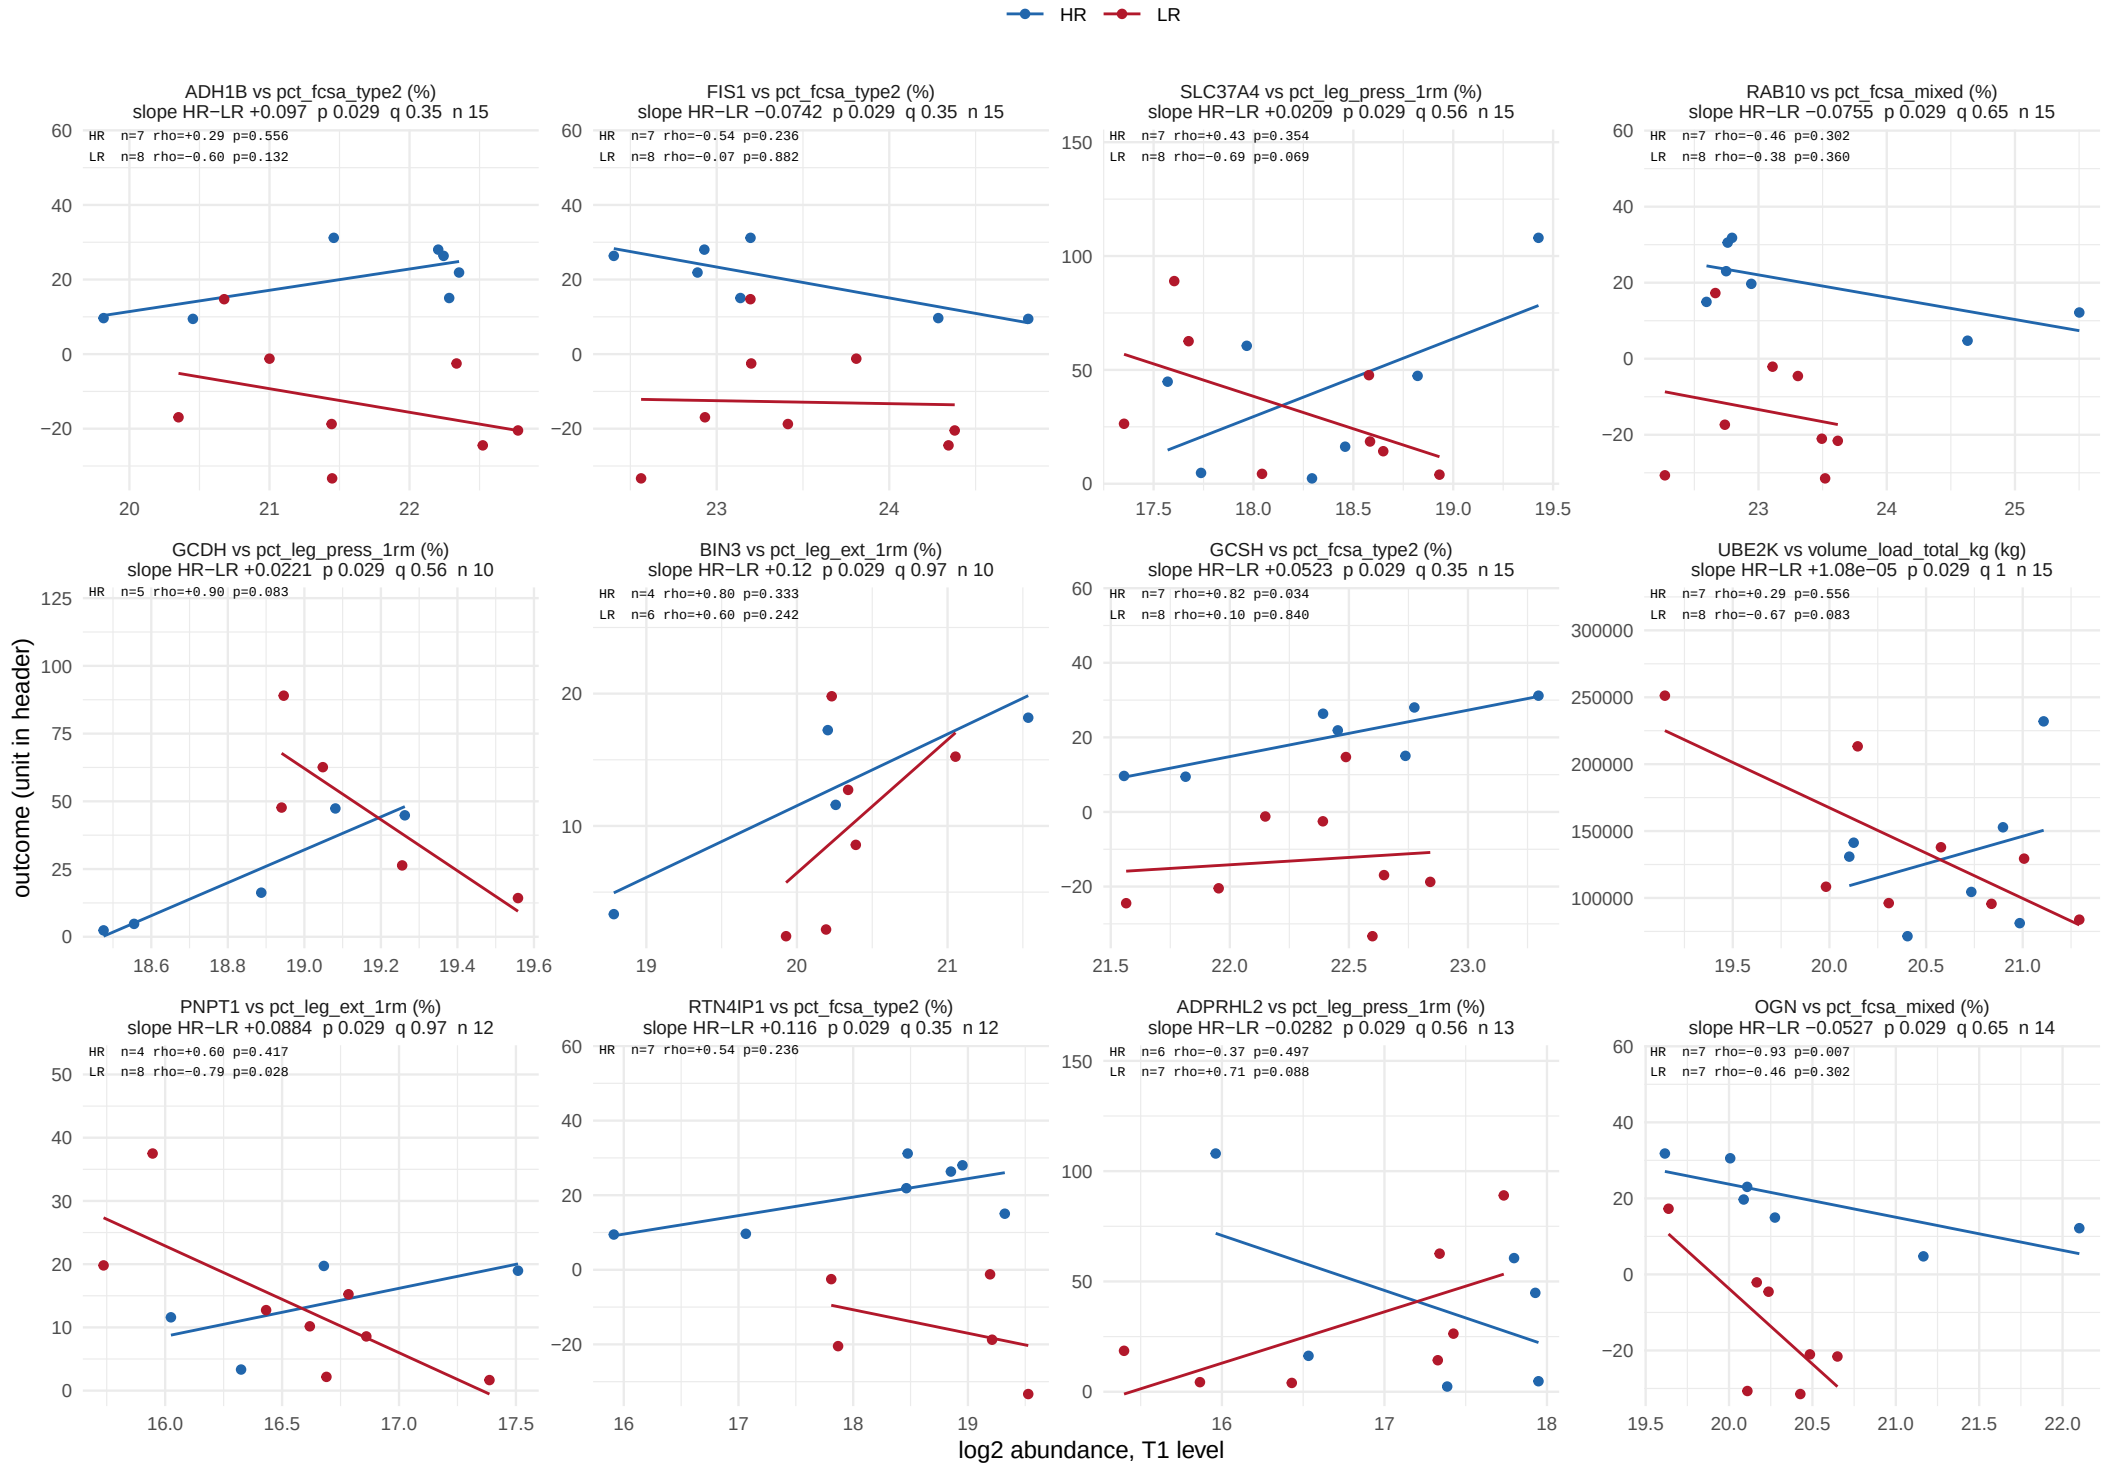

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


721 of 12553 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 38 of 61.

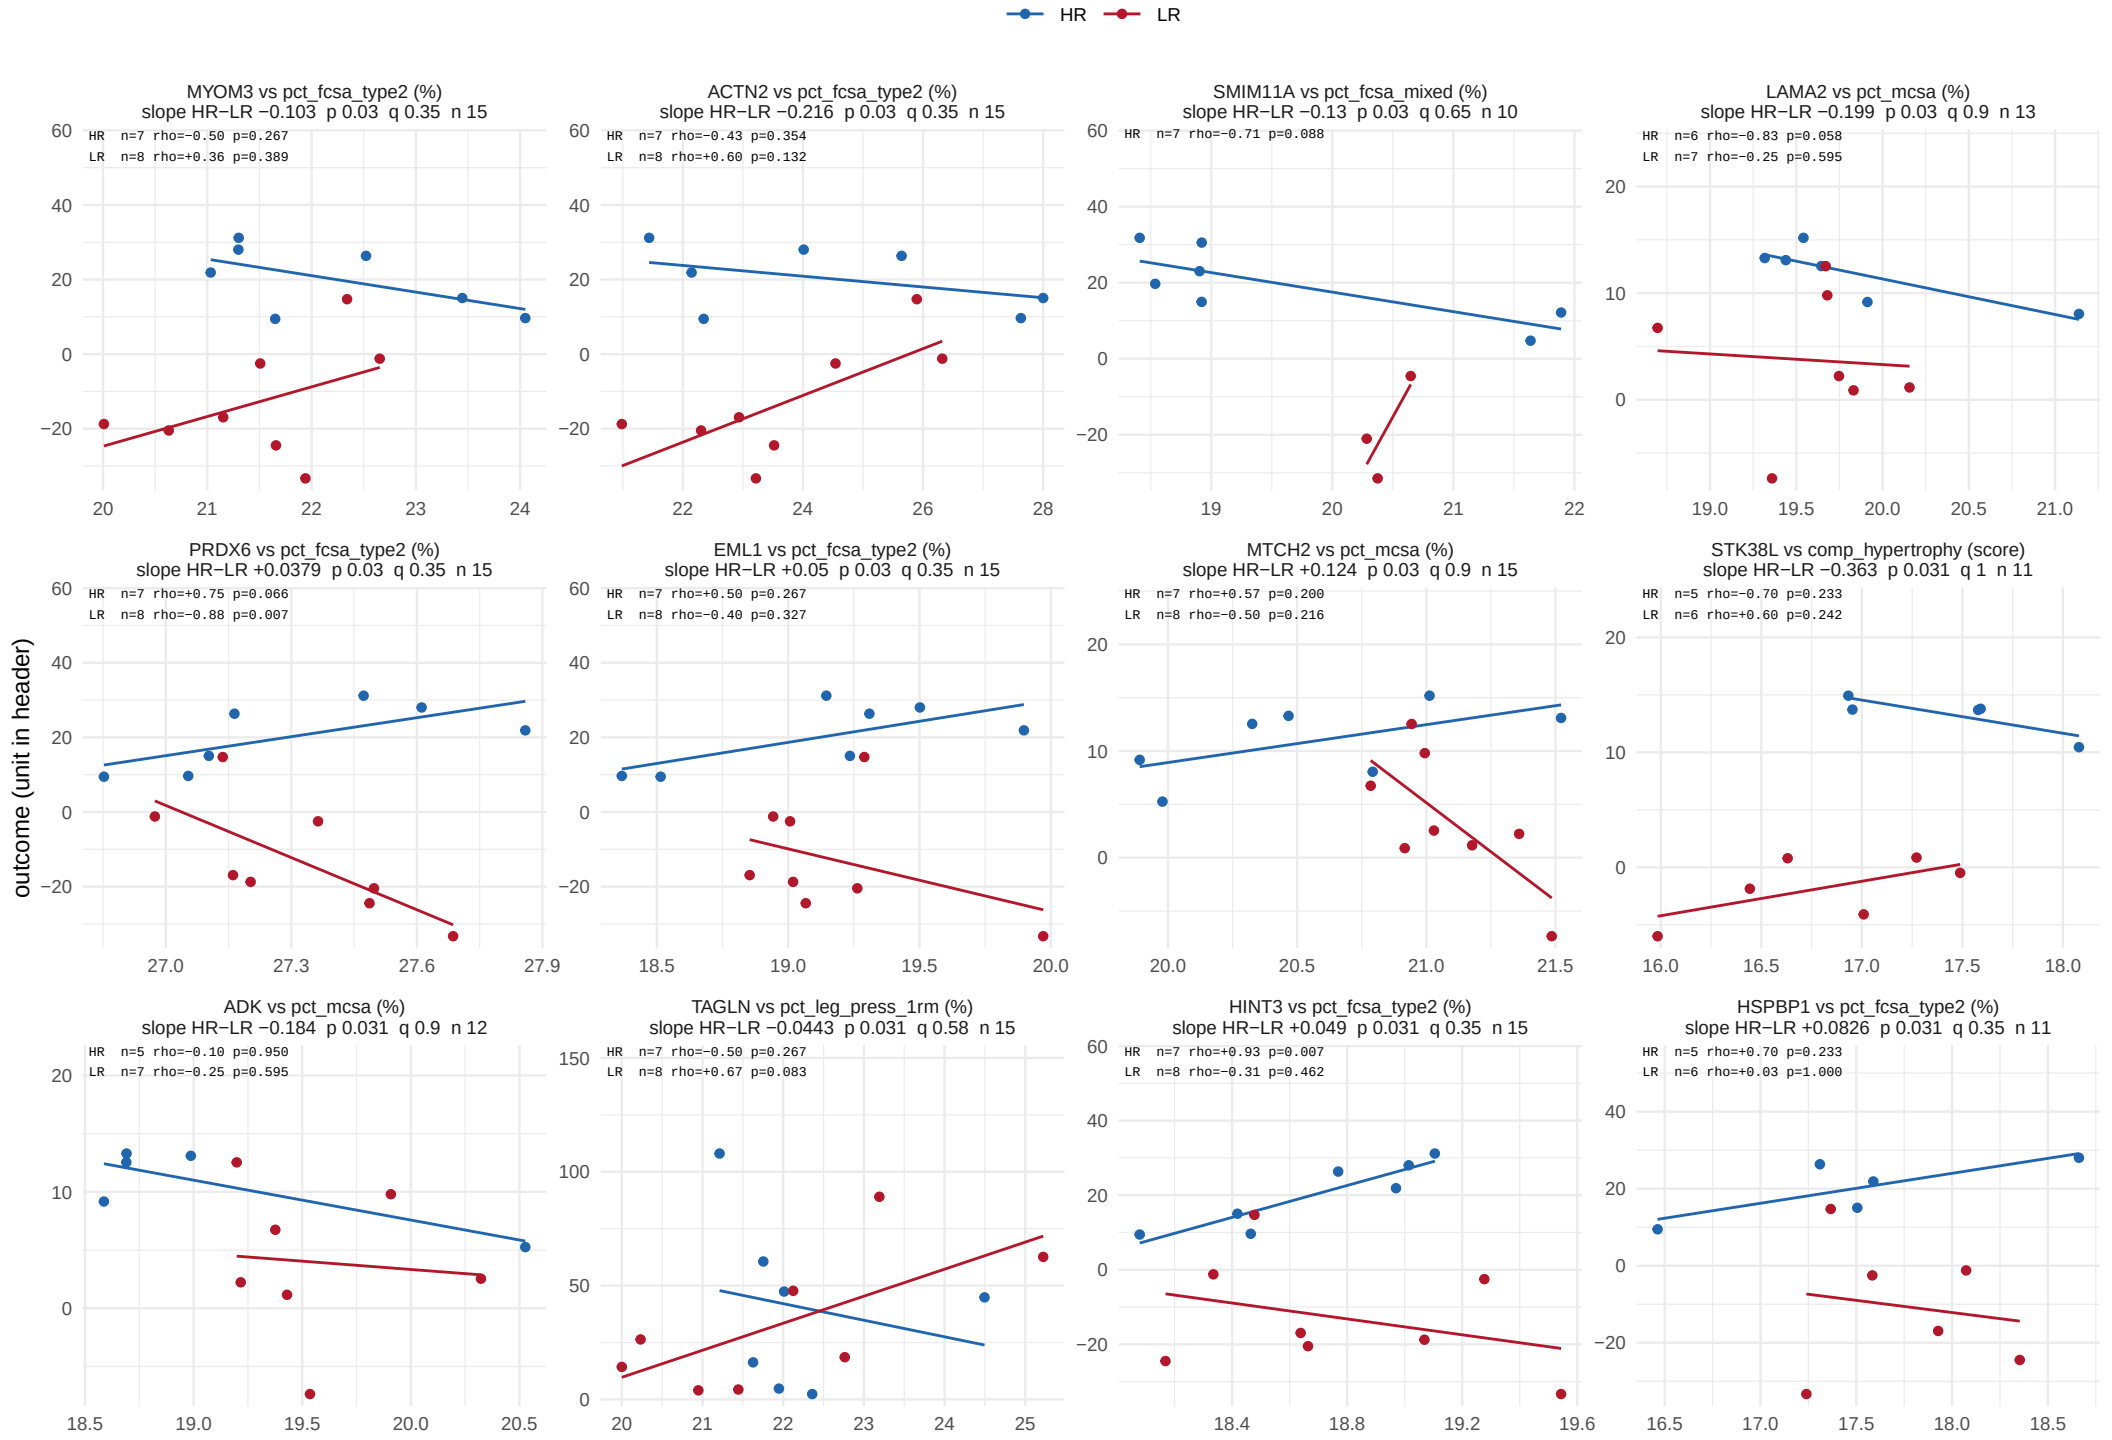

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


721 of 12553 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 39 of 61.

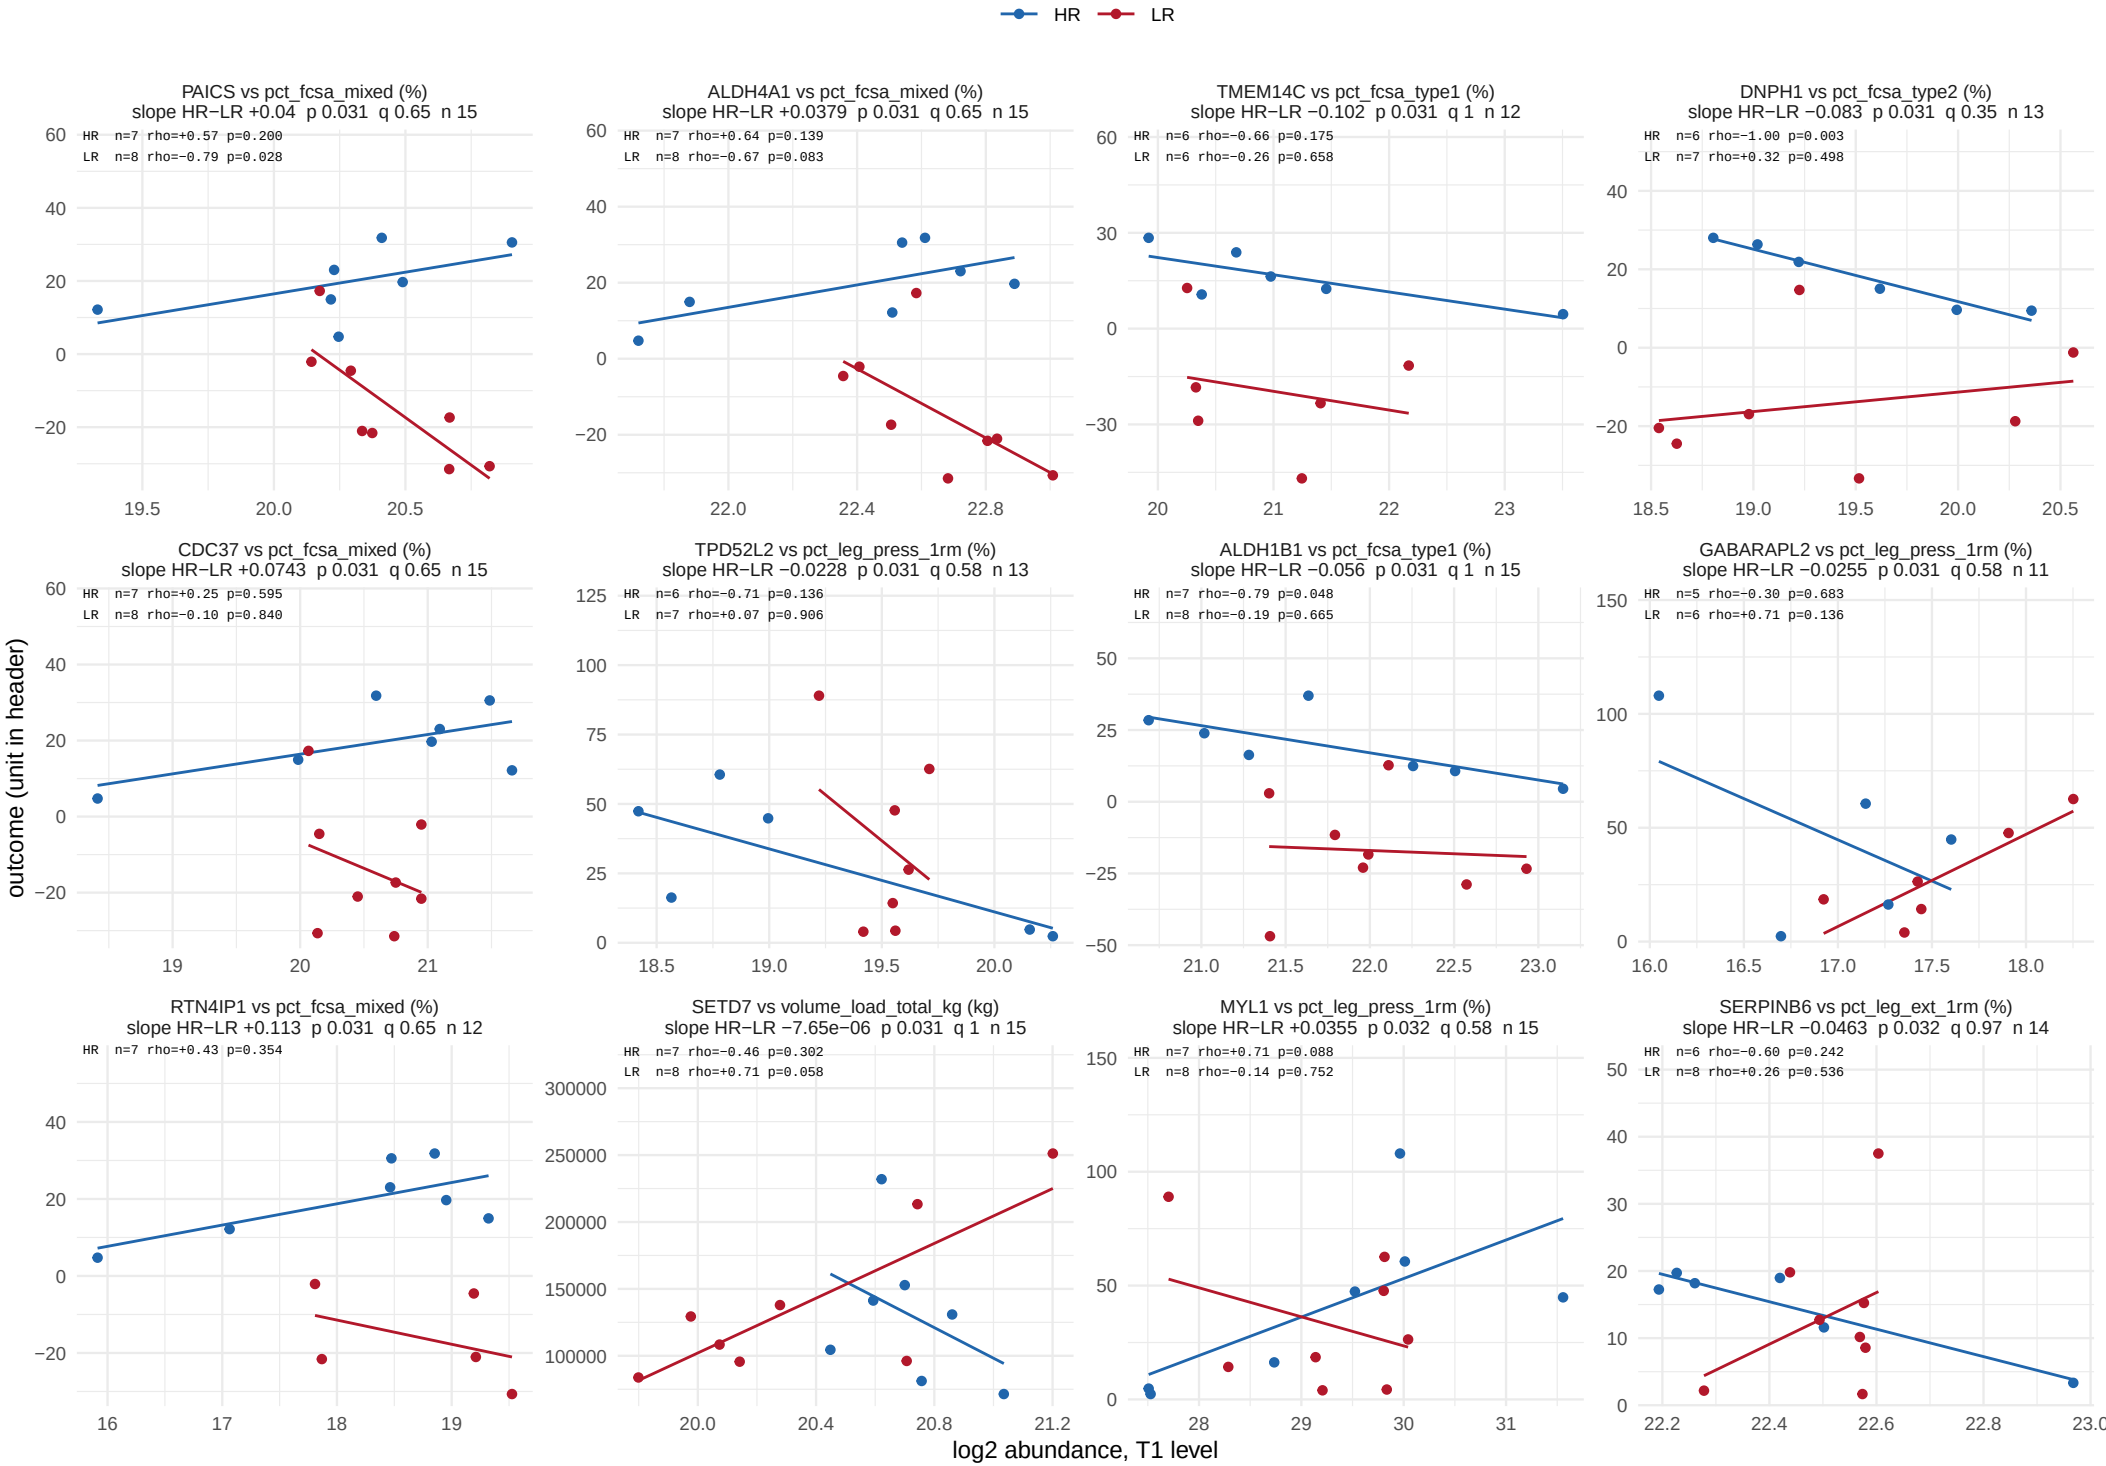

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


721 of 12553 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 40 of 61.

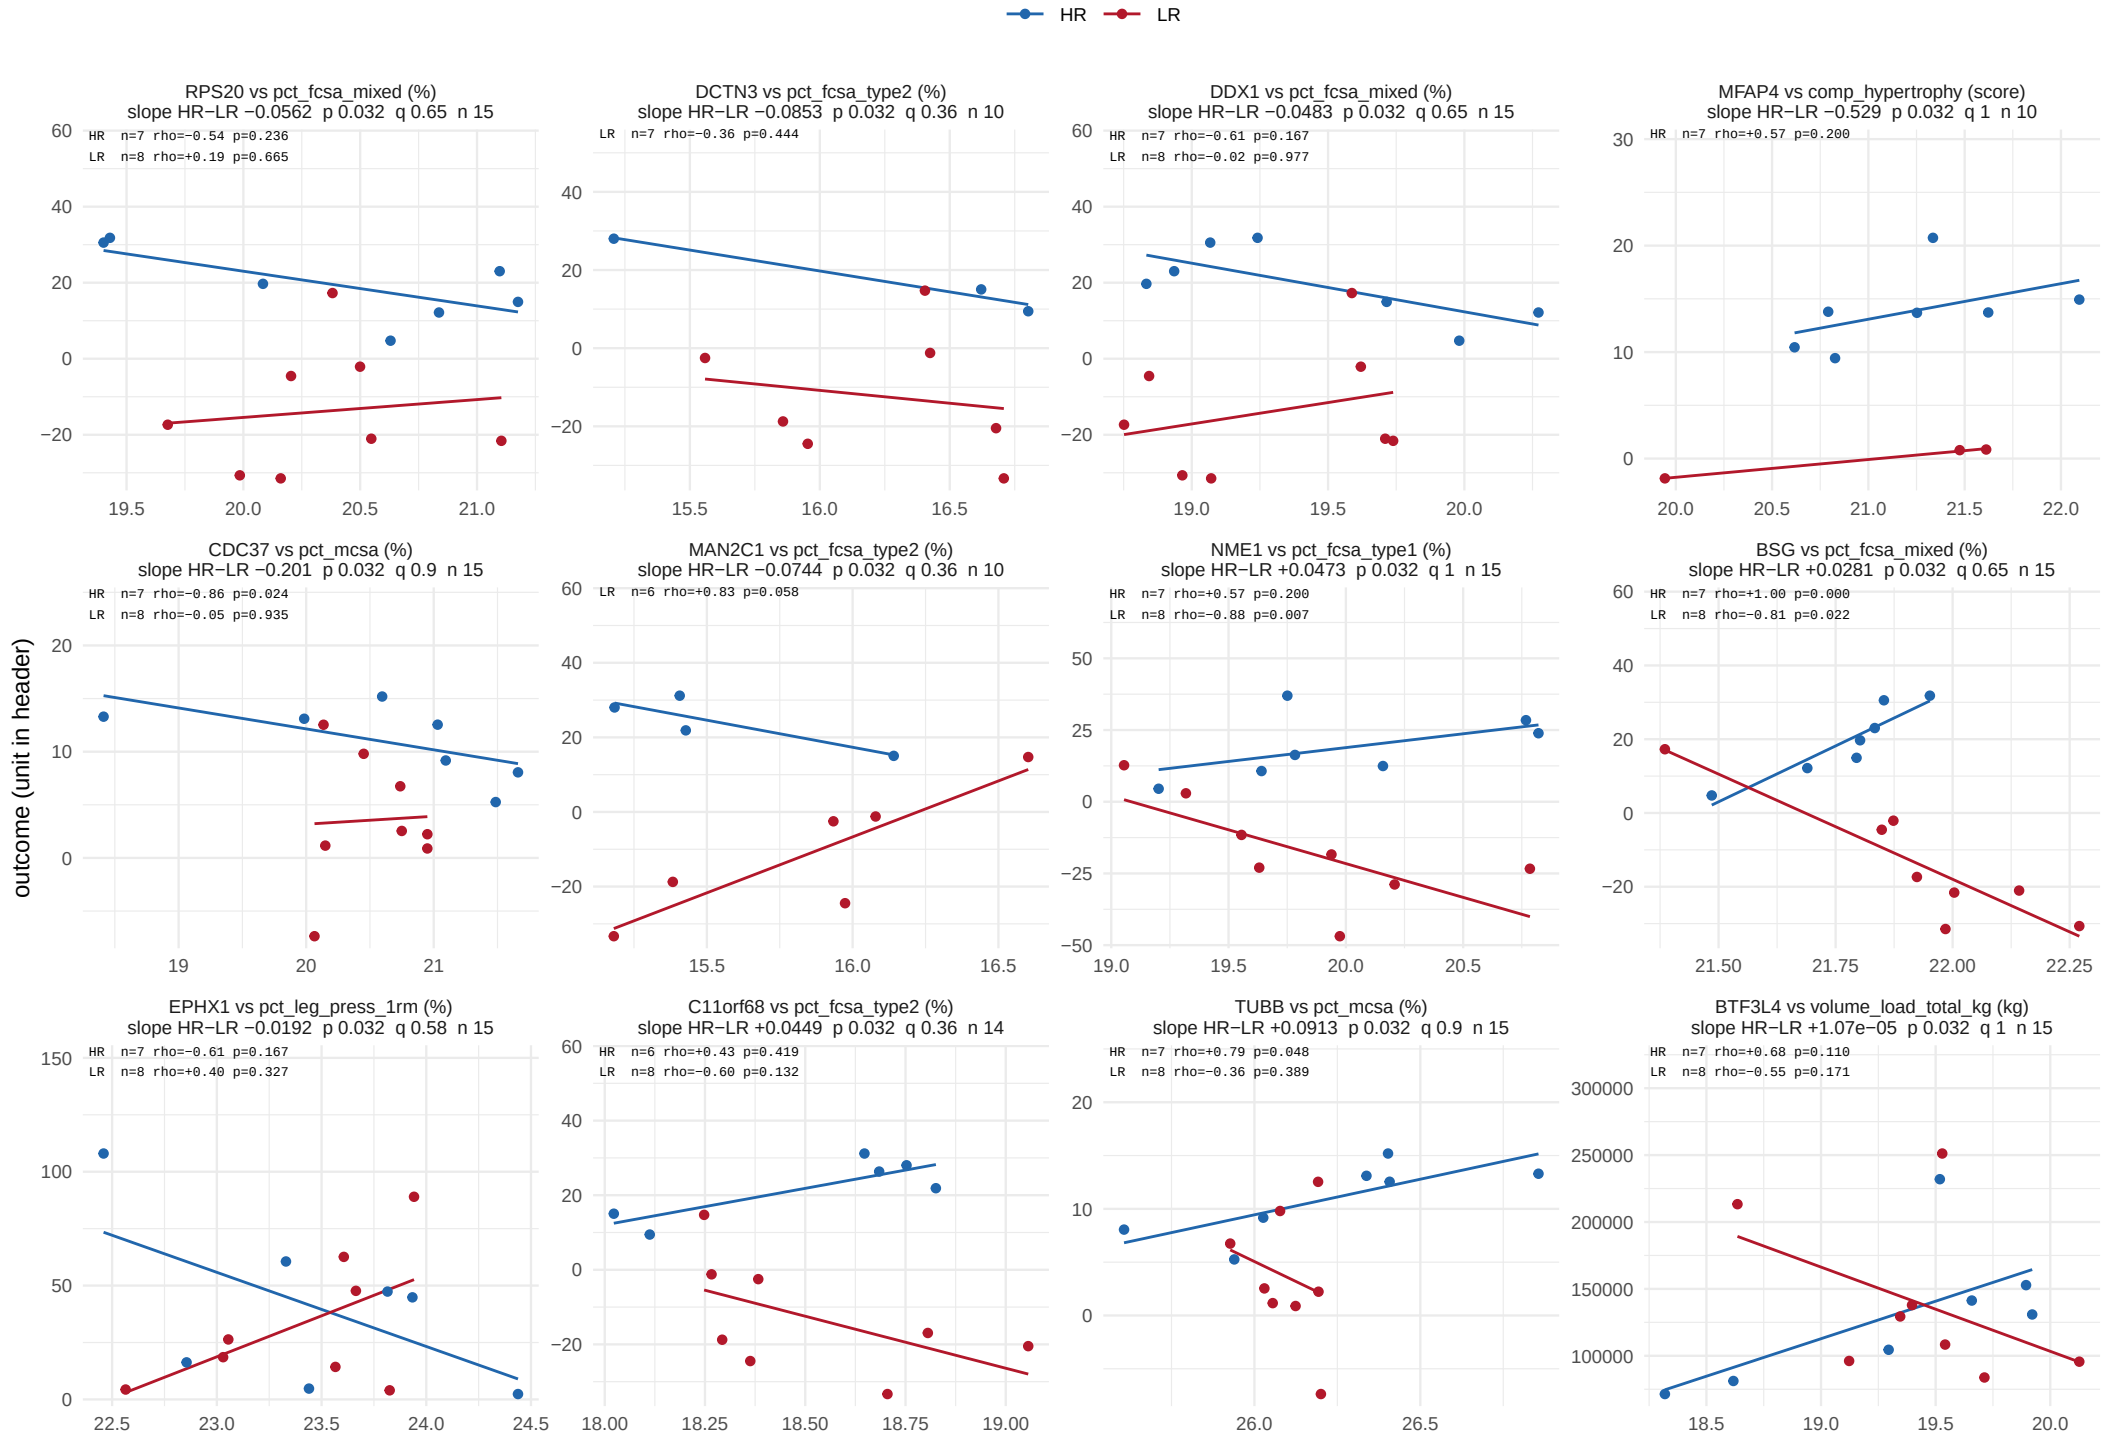

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


721 of 12553 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 41 of 61.

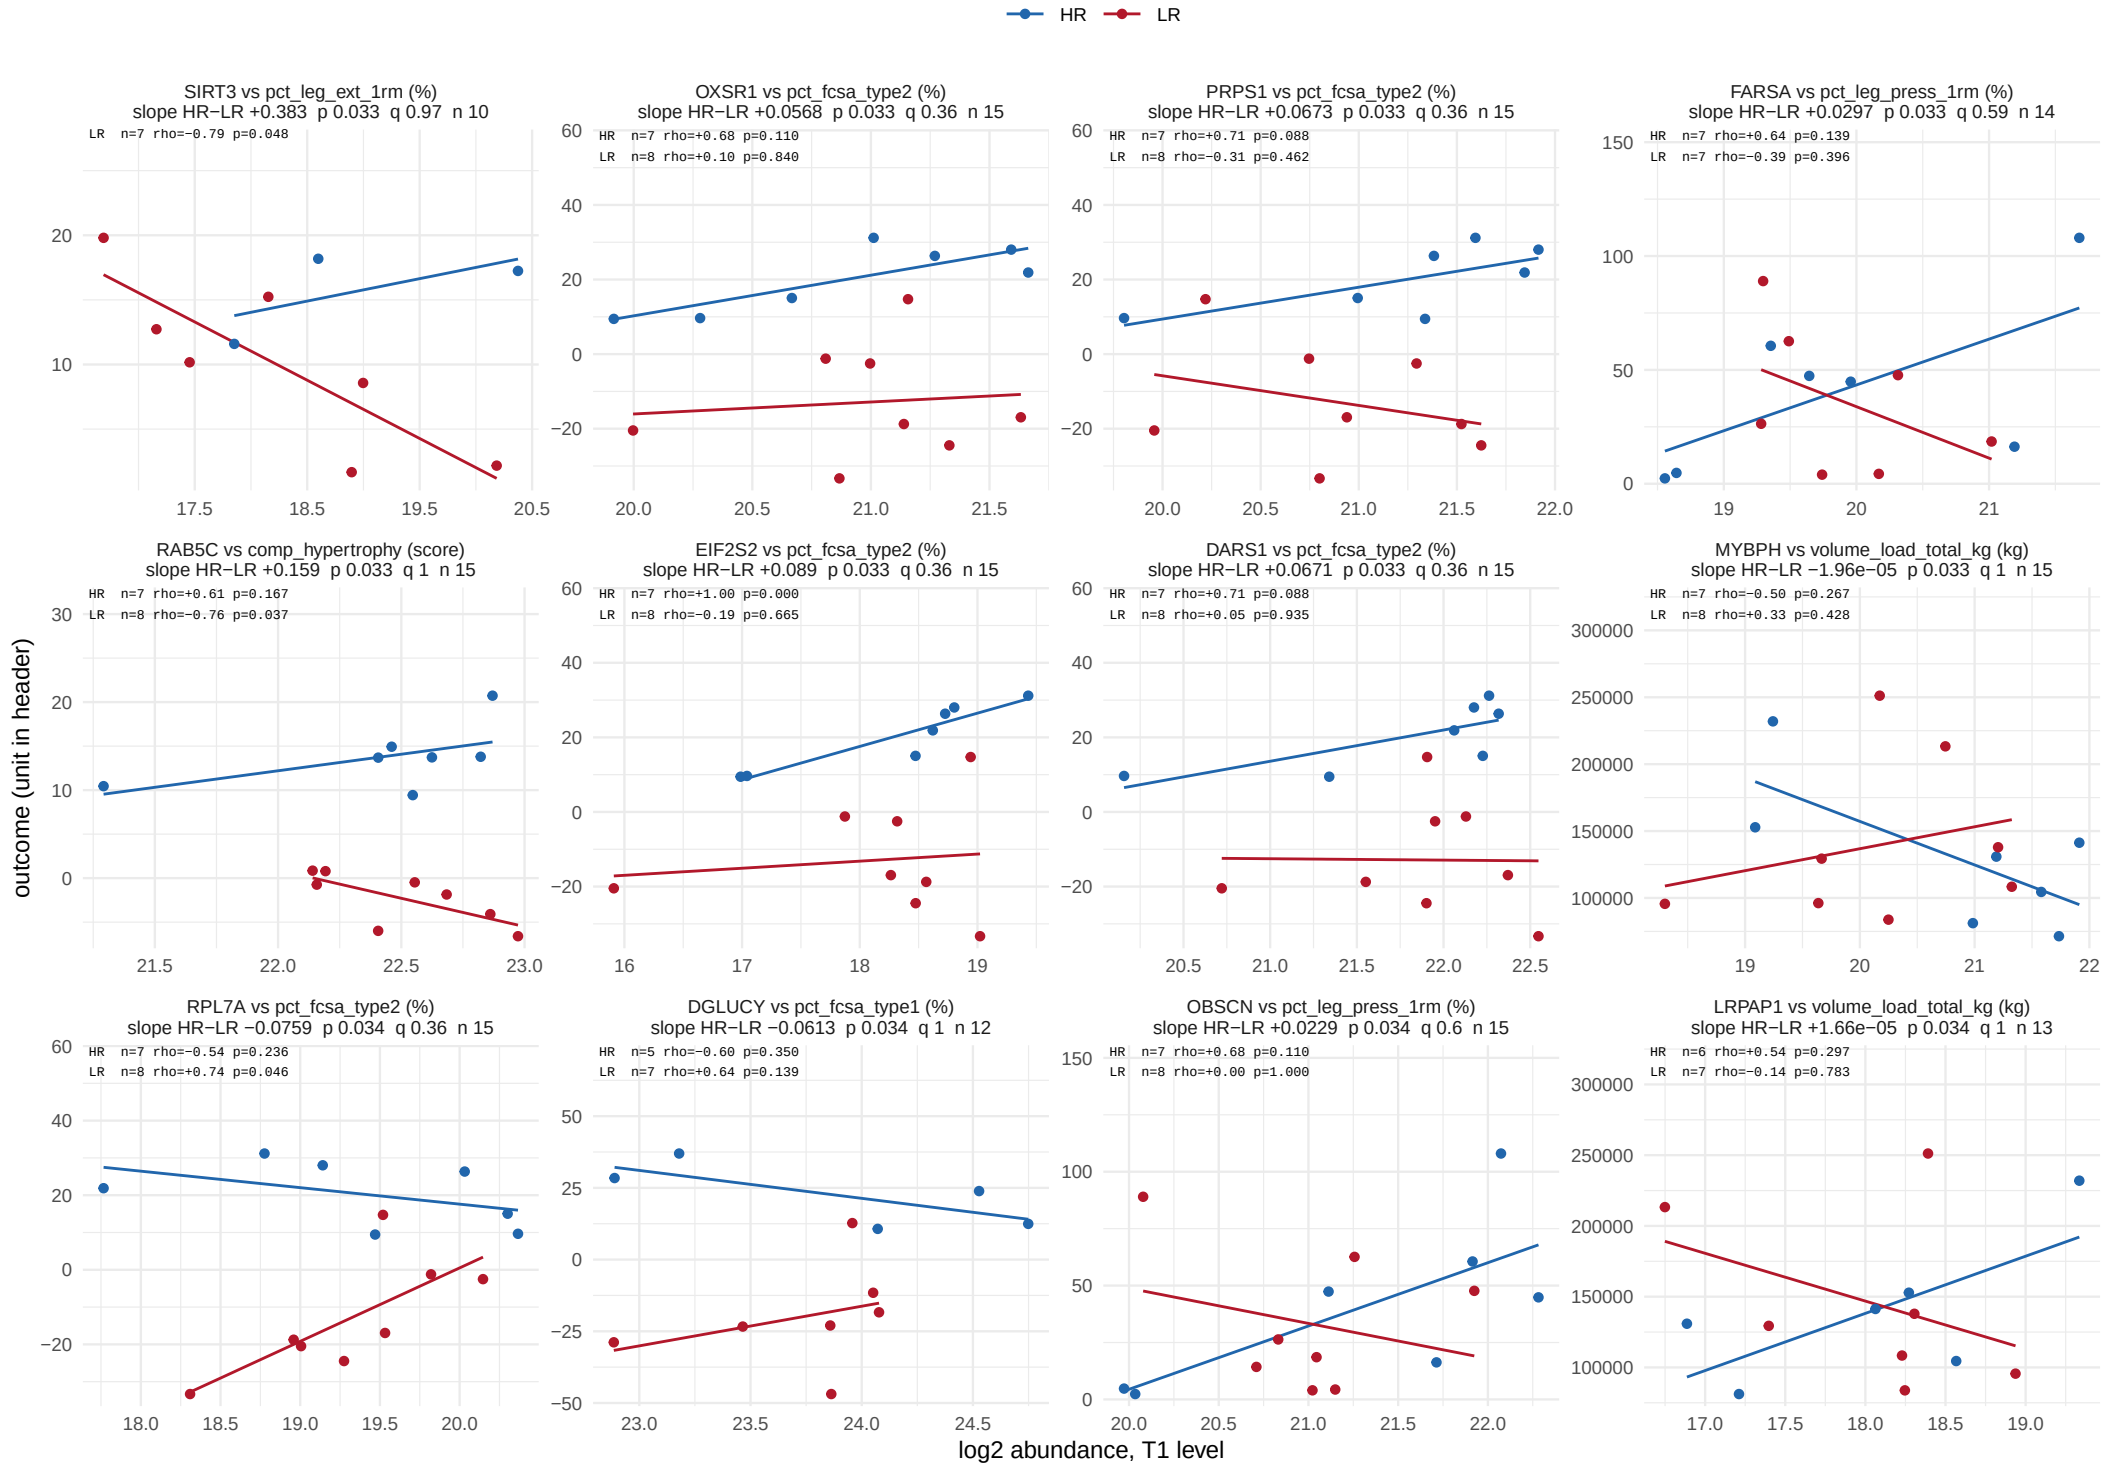

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


721 of 12553 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 42 of 61.

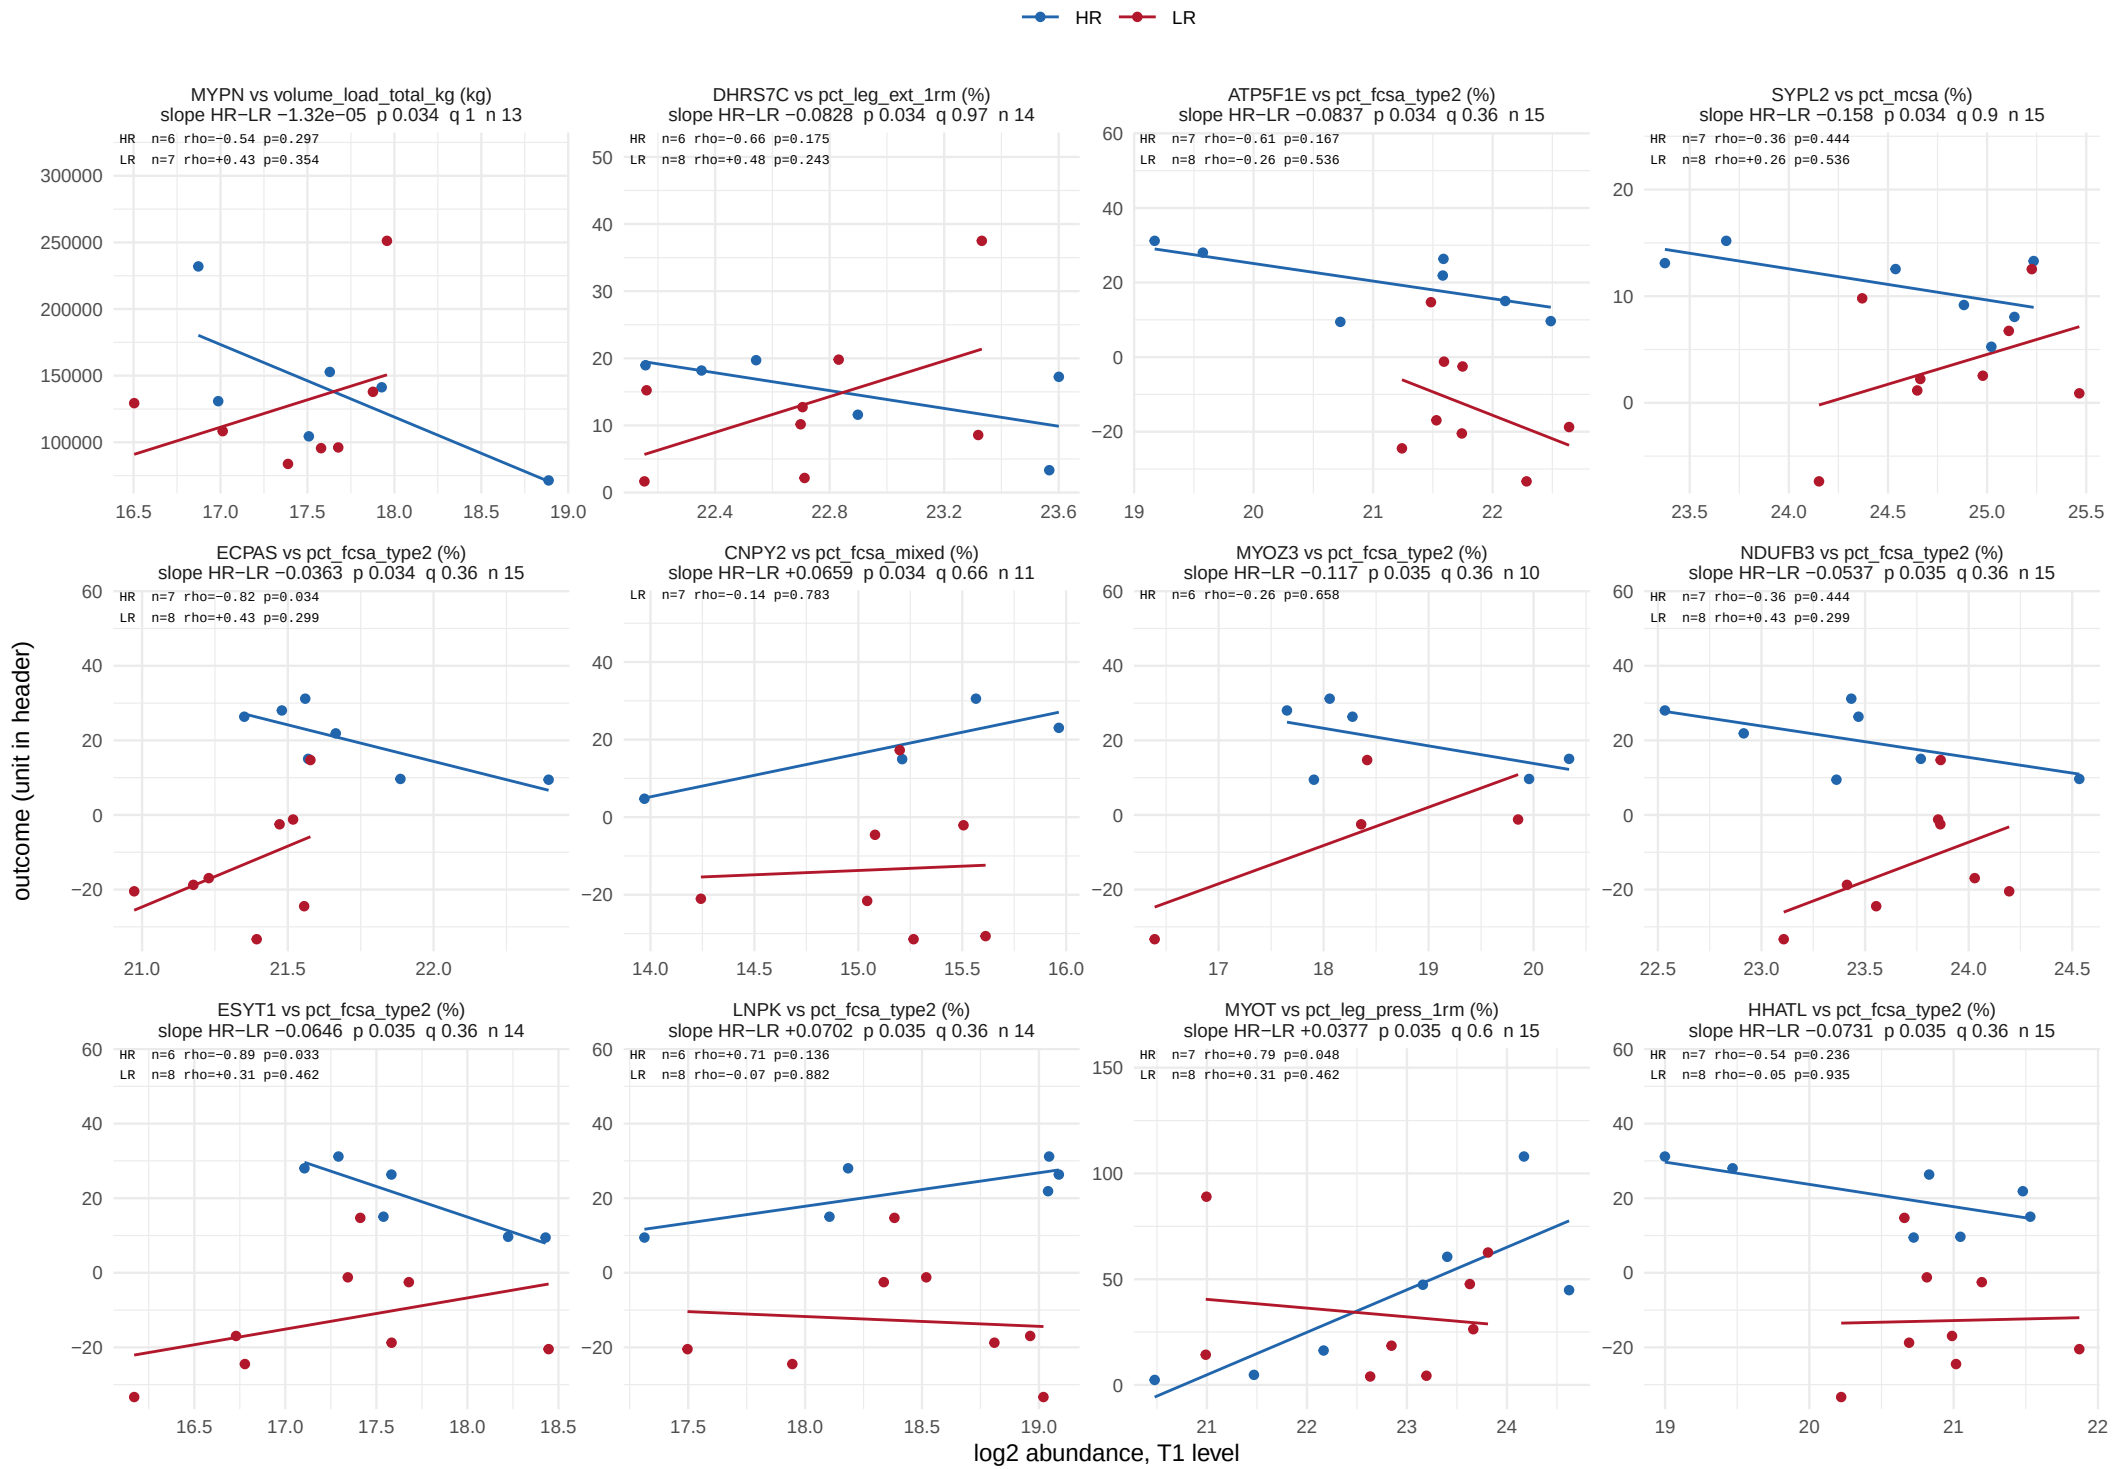

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


721 of 12553 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 43 of 61.

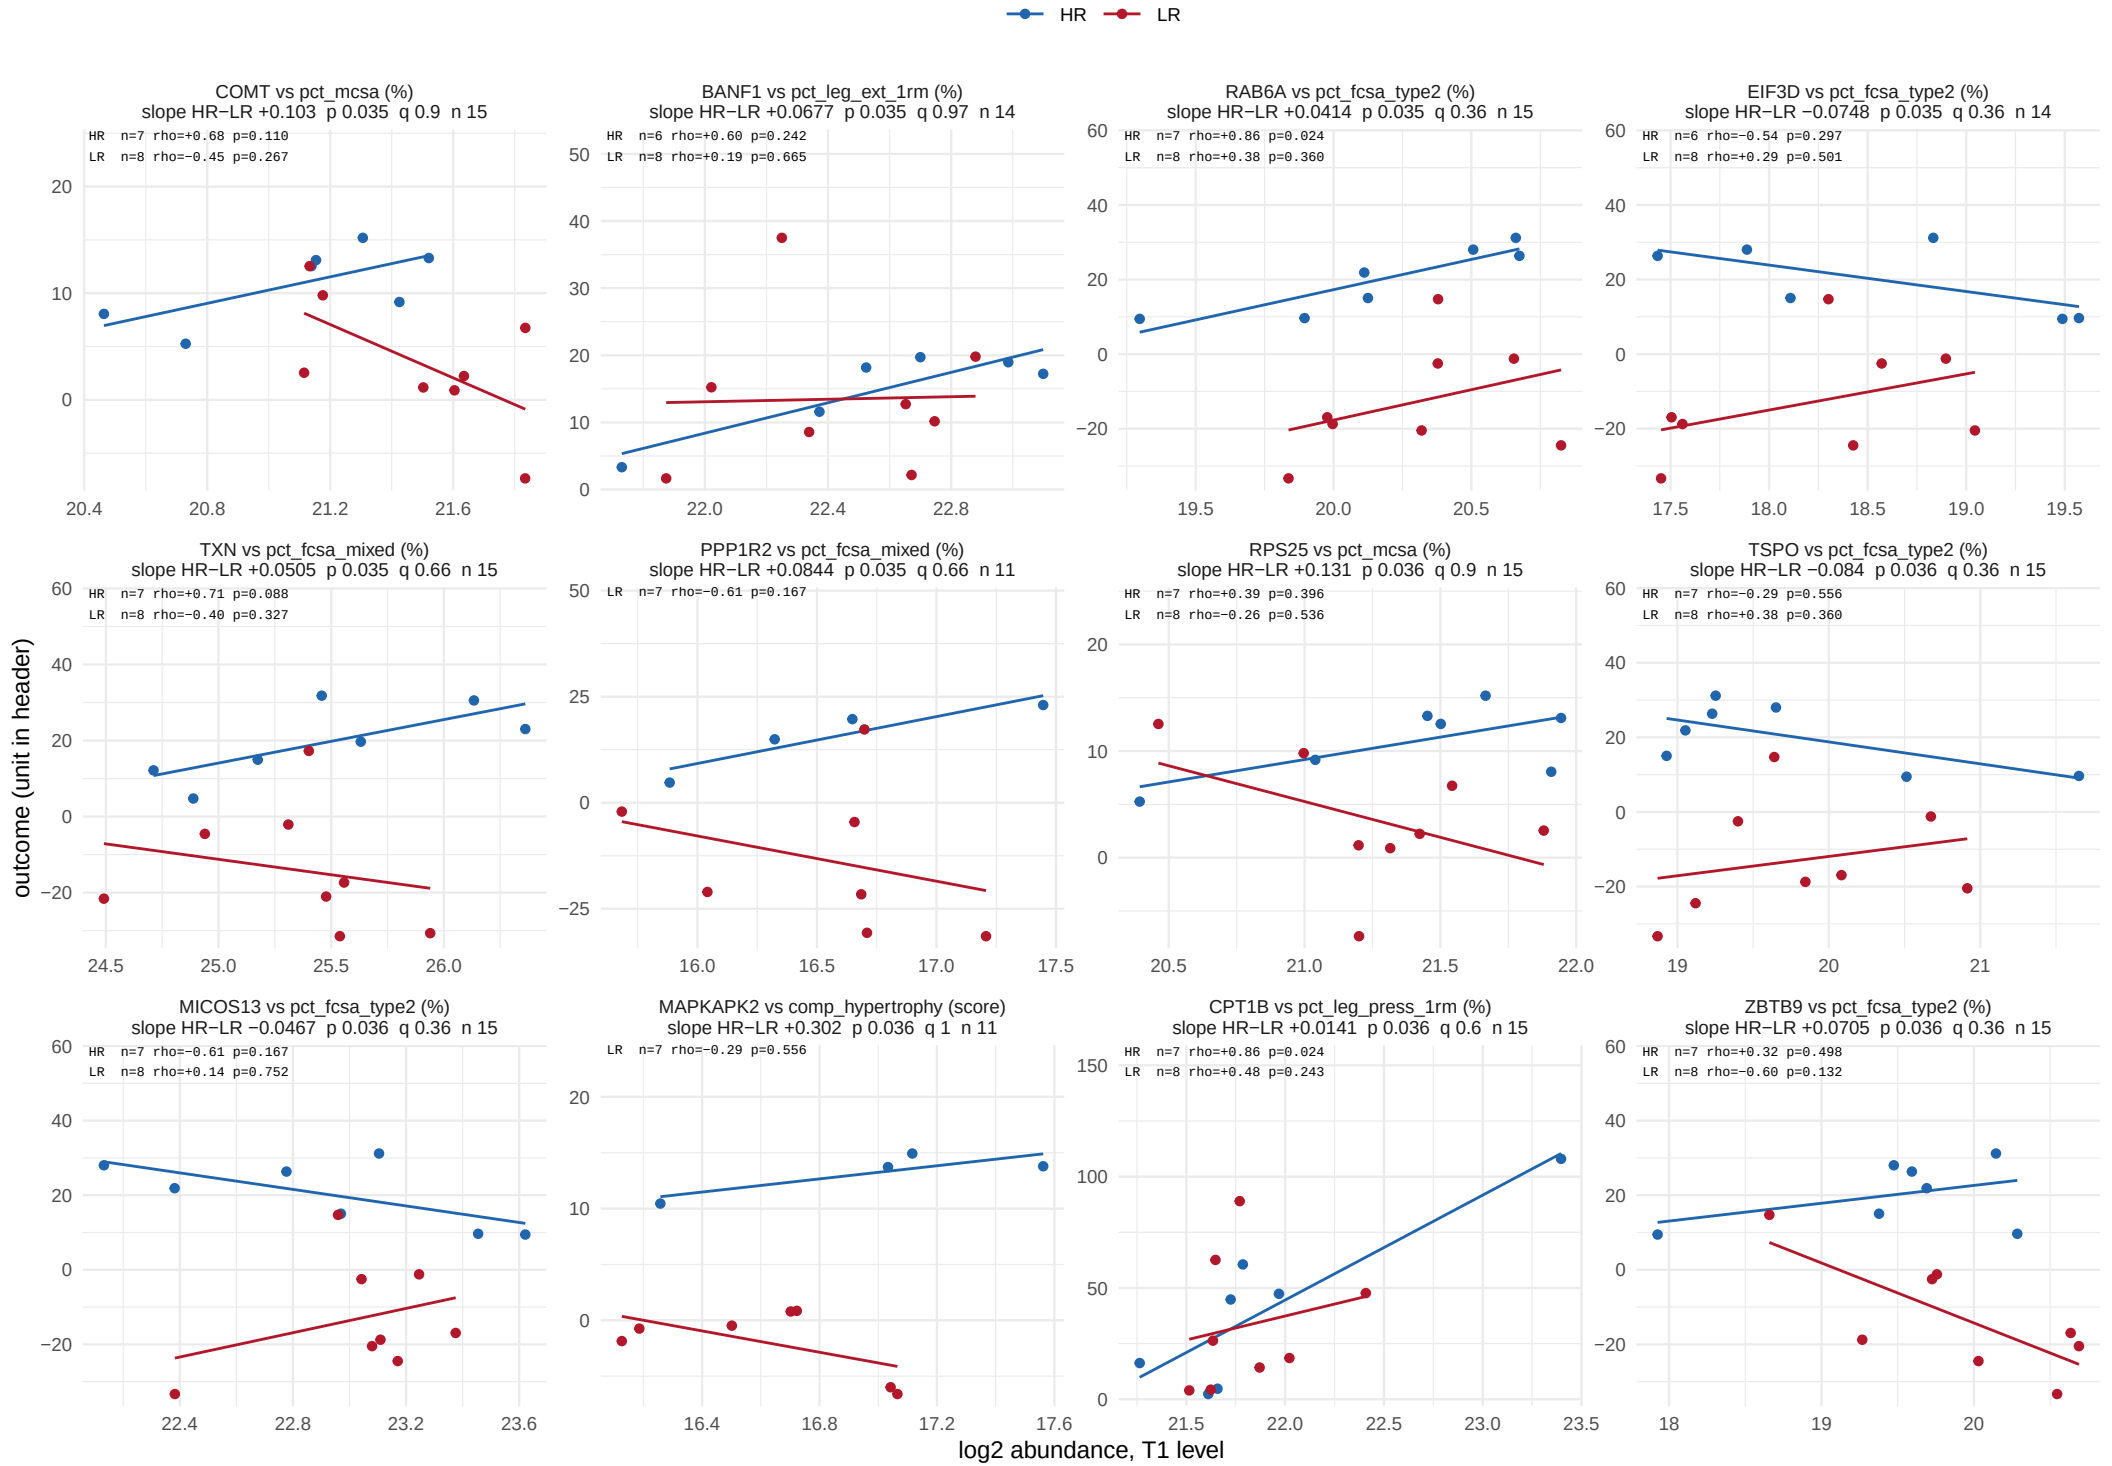

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


721 of 12553 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 44 of 61.

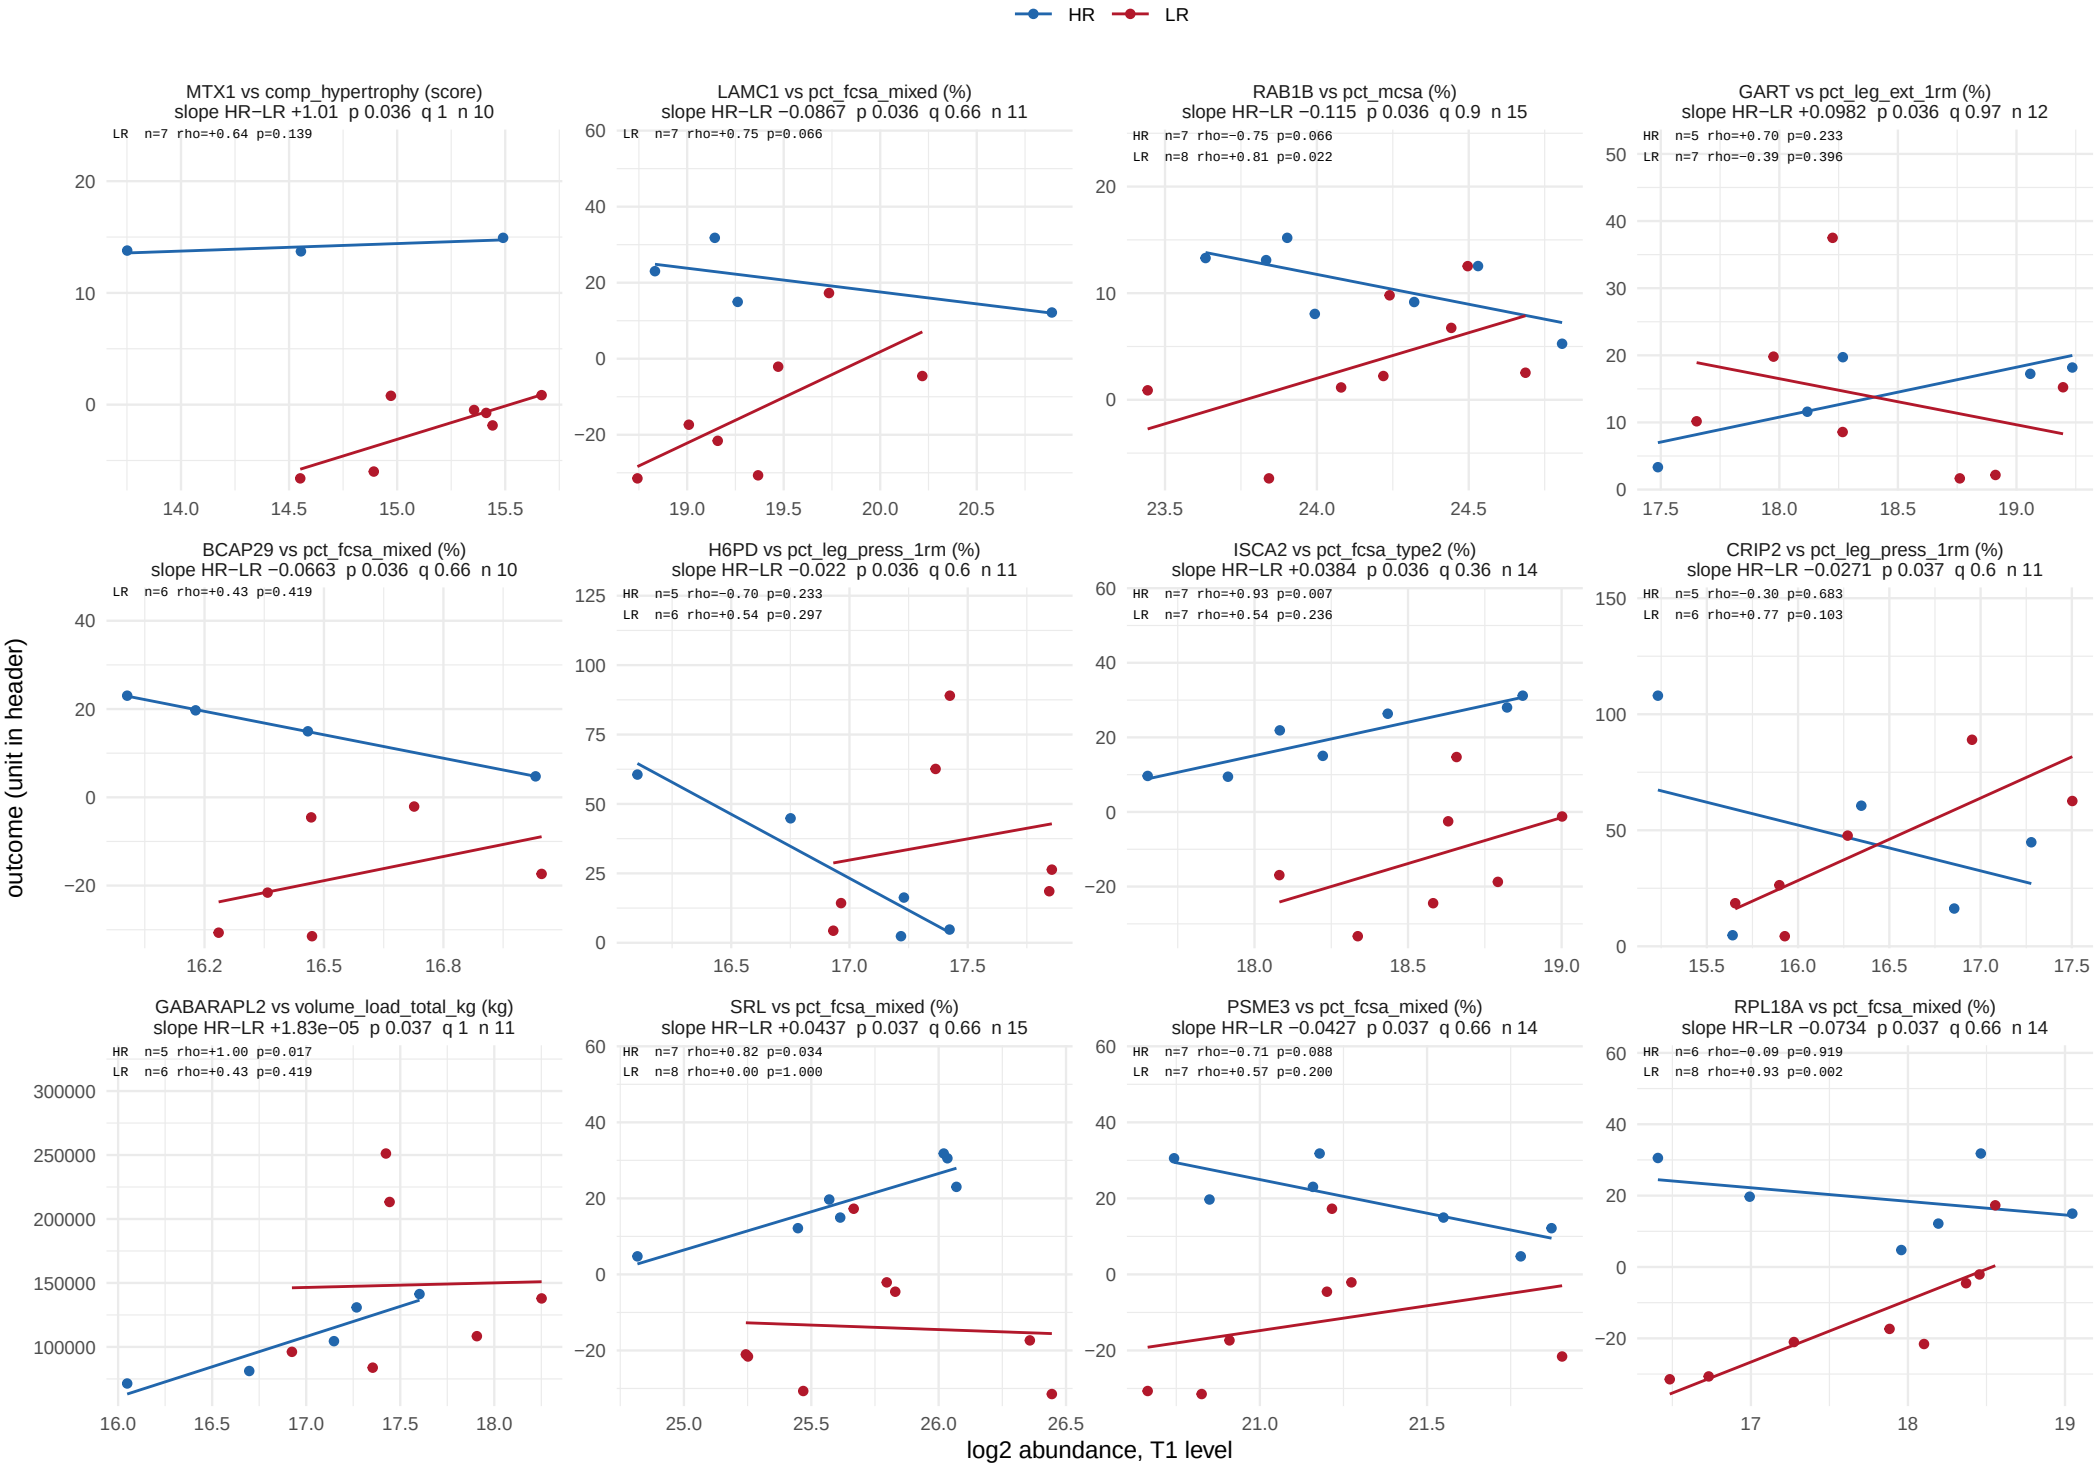

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


721 of 12553 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 45 of 61.

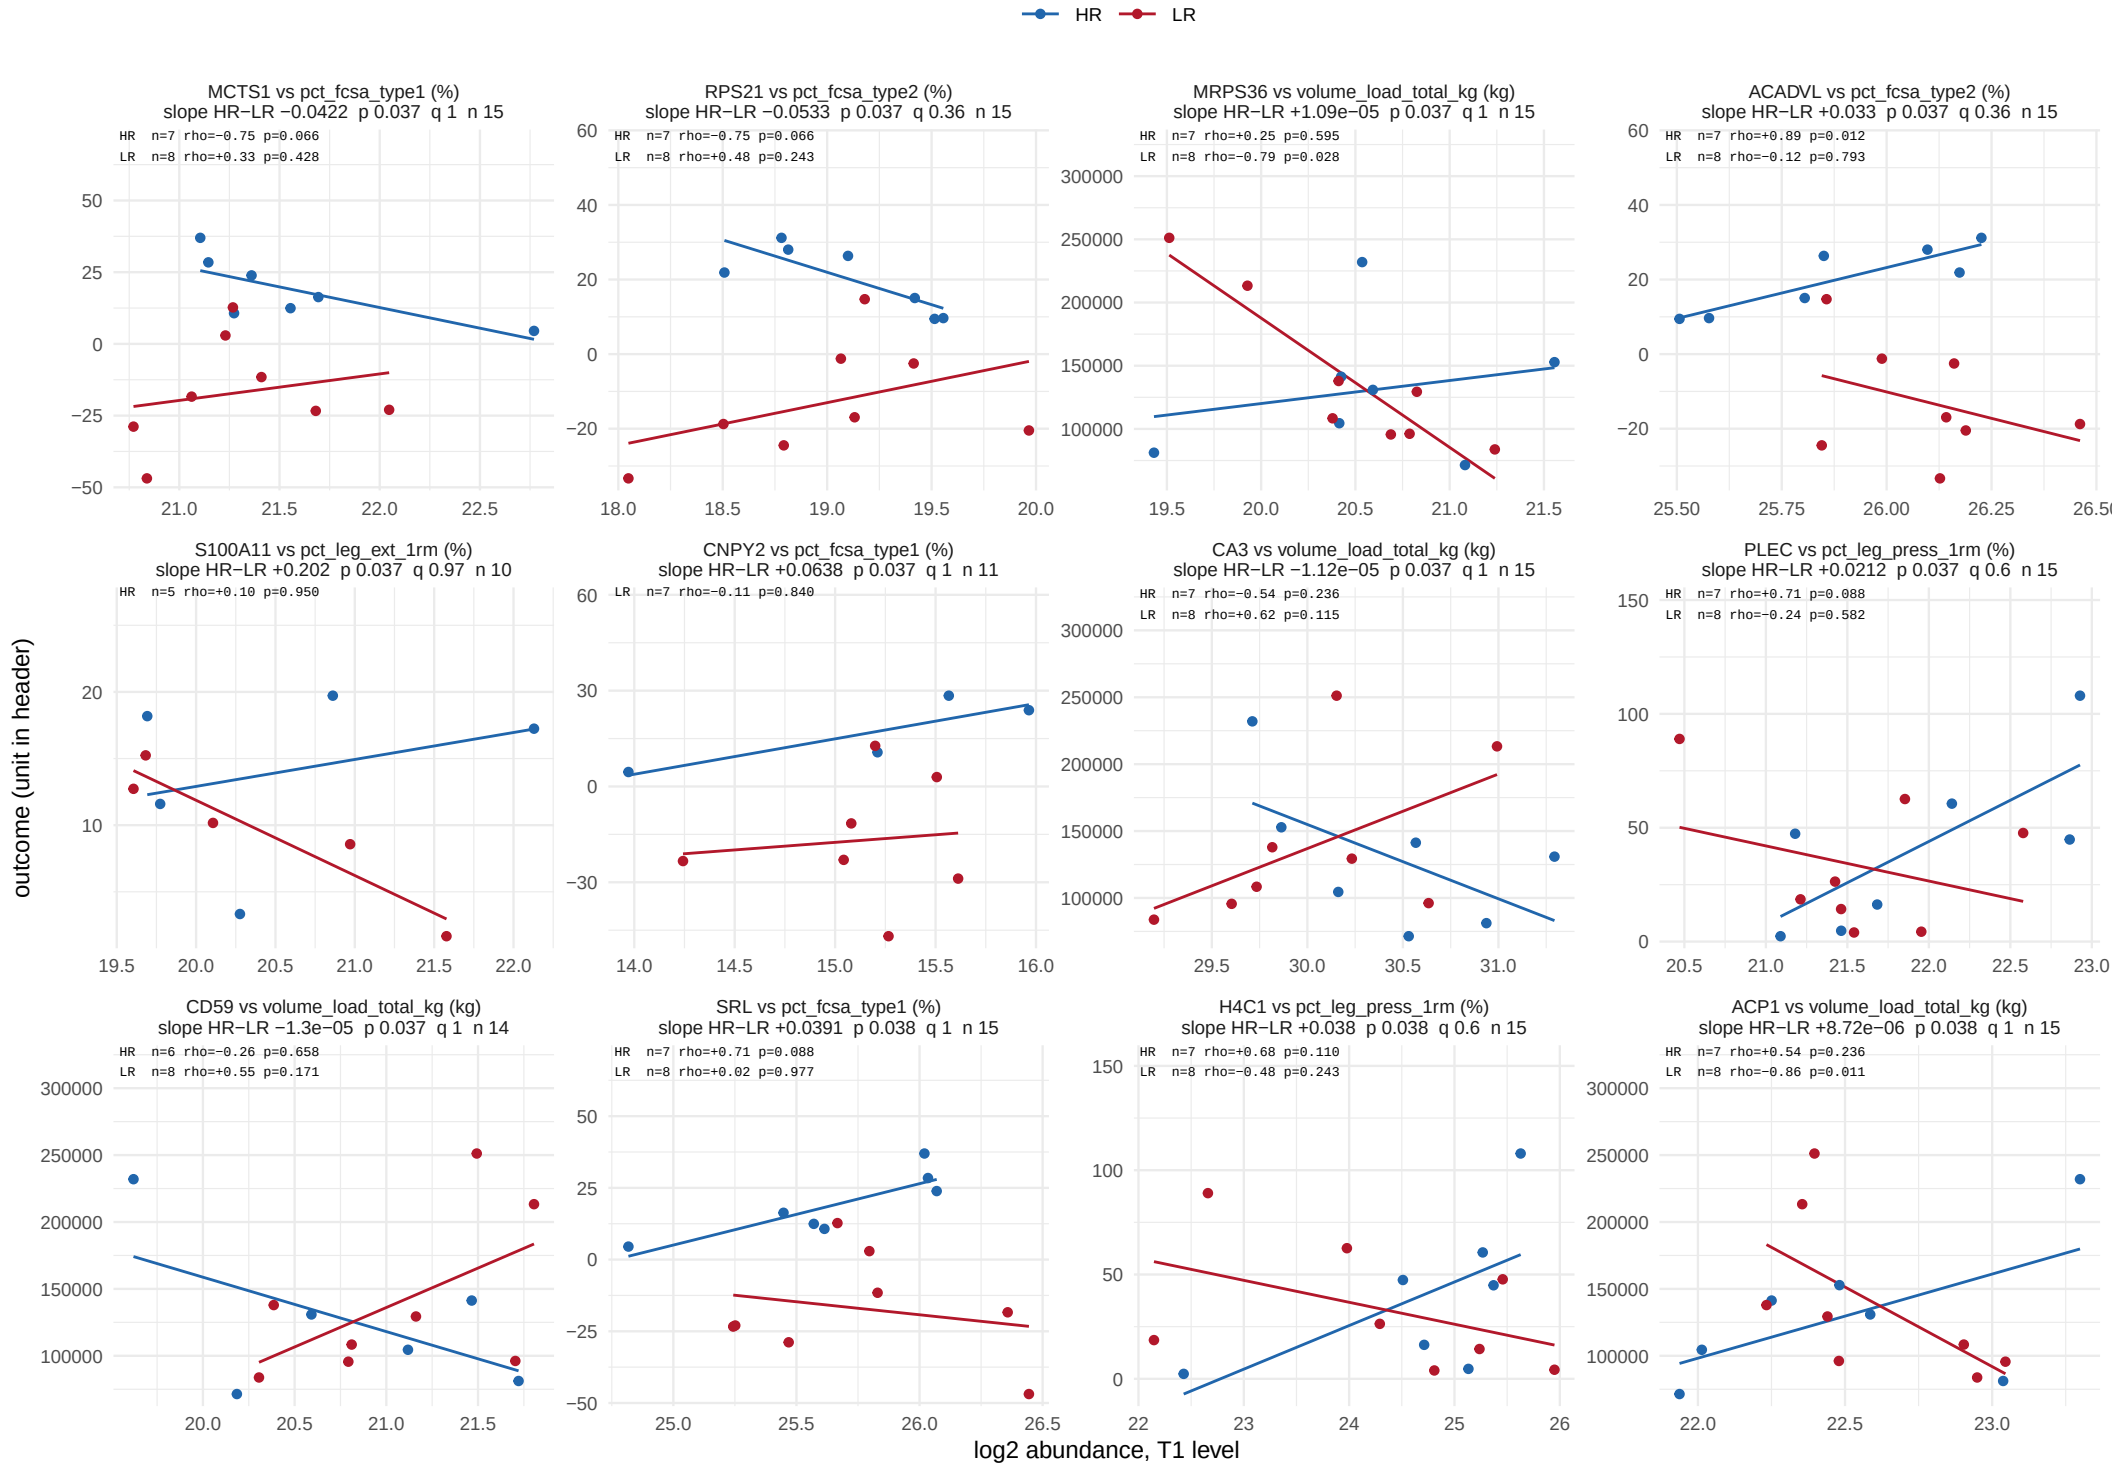

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


721 of 12553 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 46 of 61.

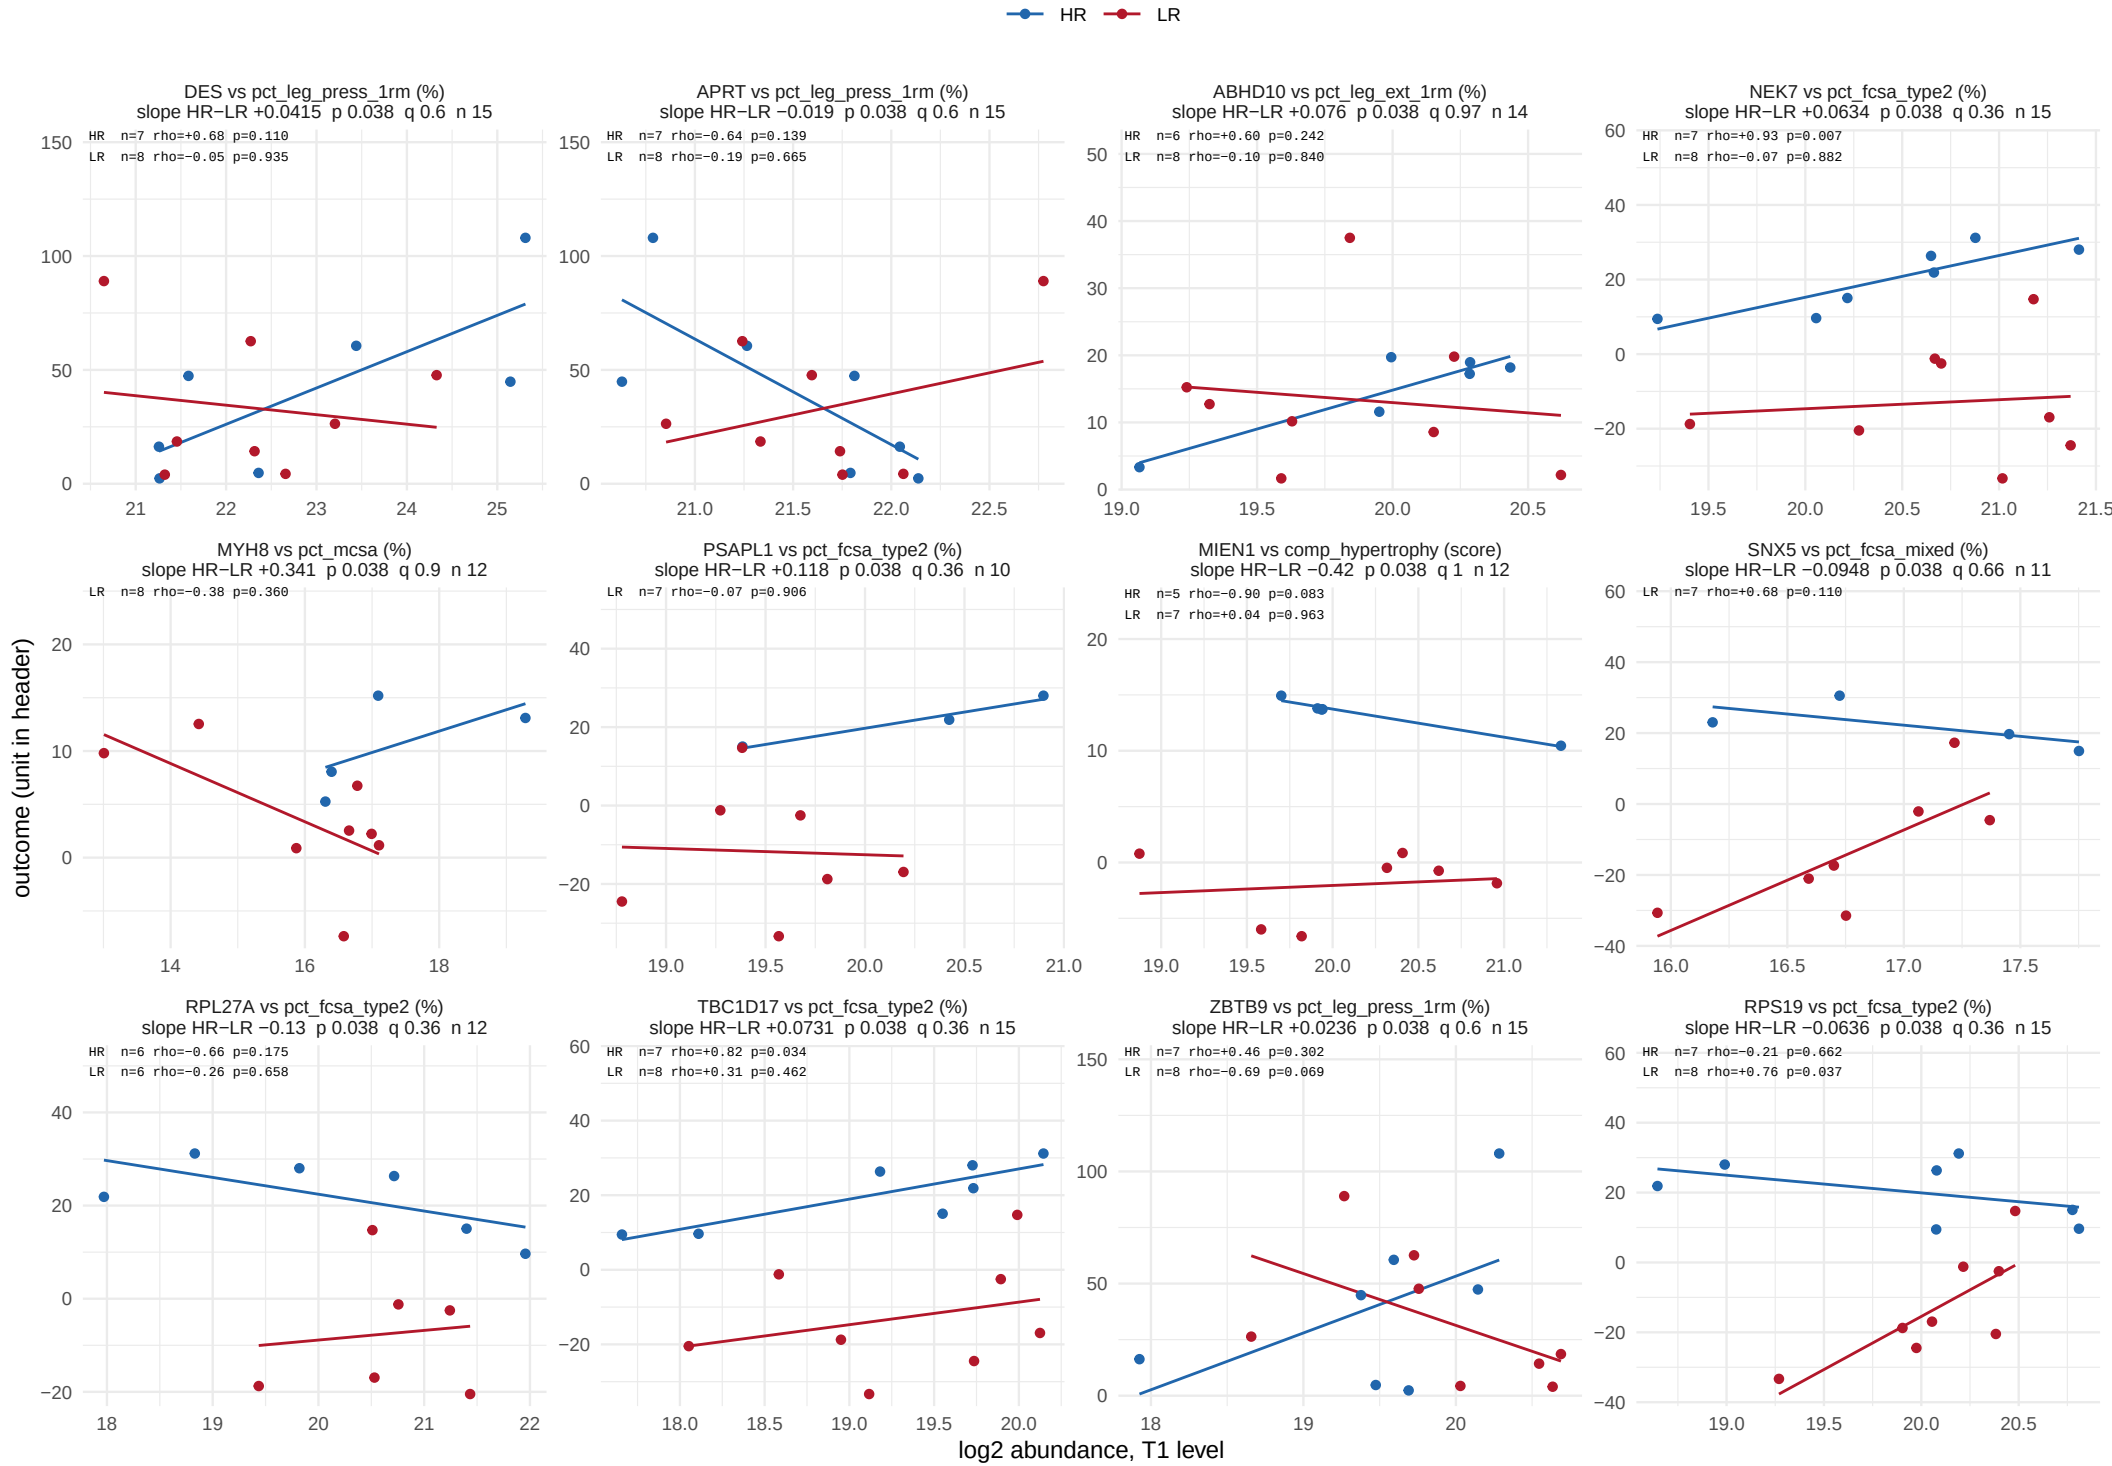

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


721 of 12553 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 47 of 61.

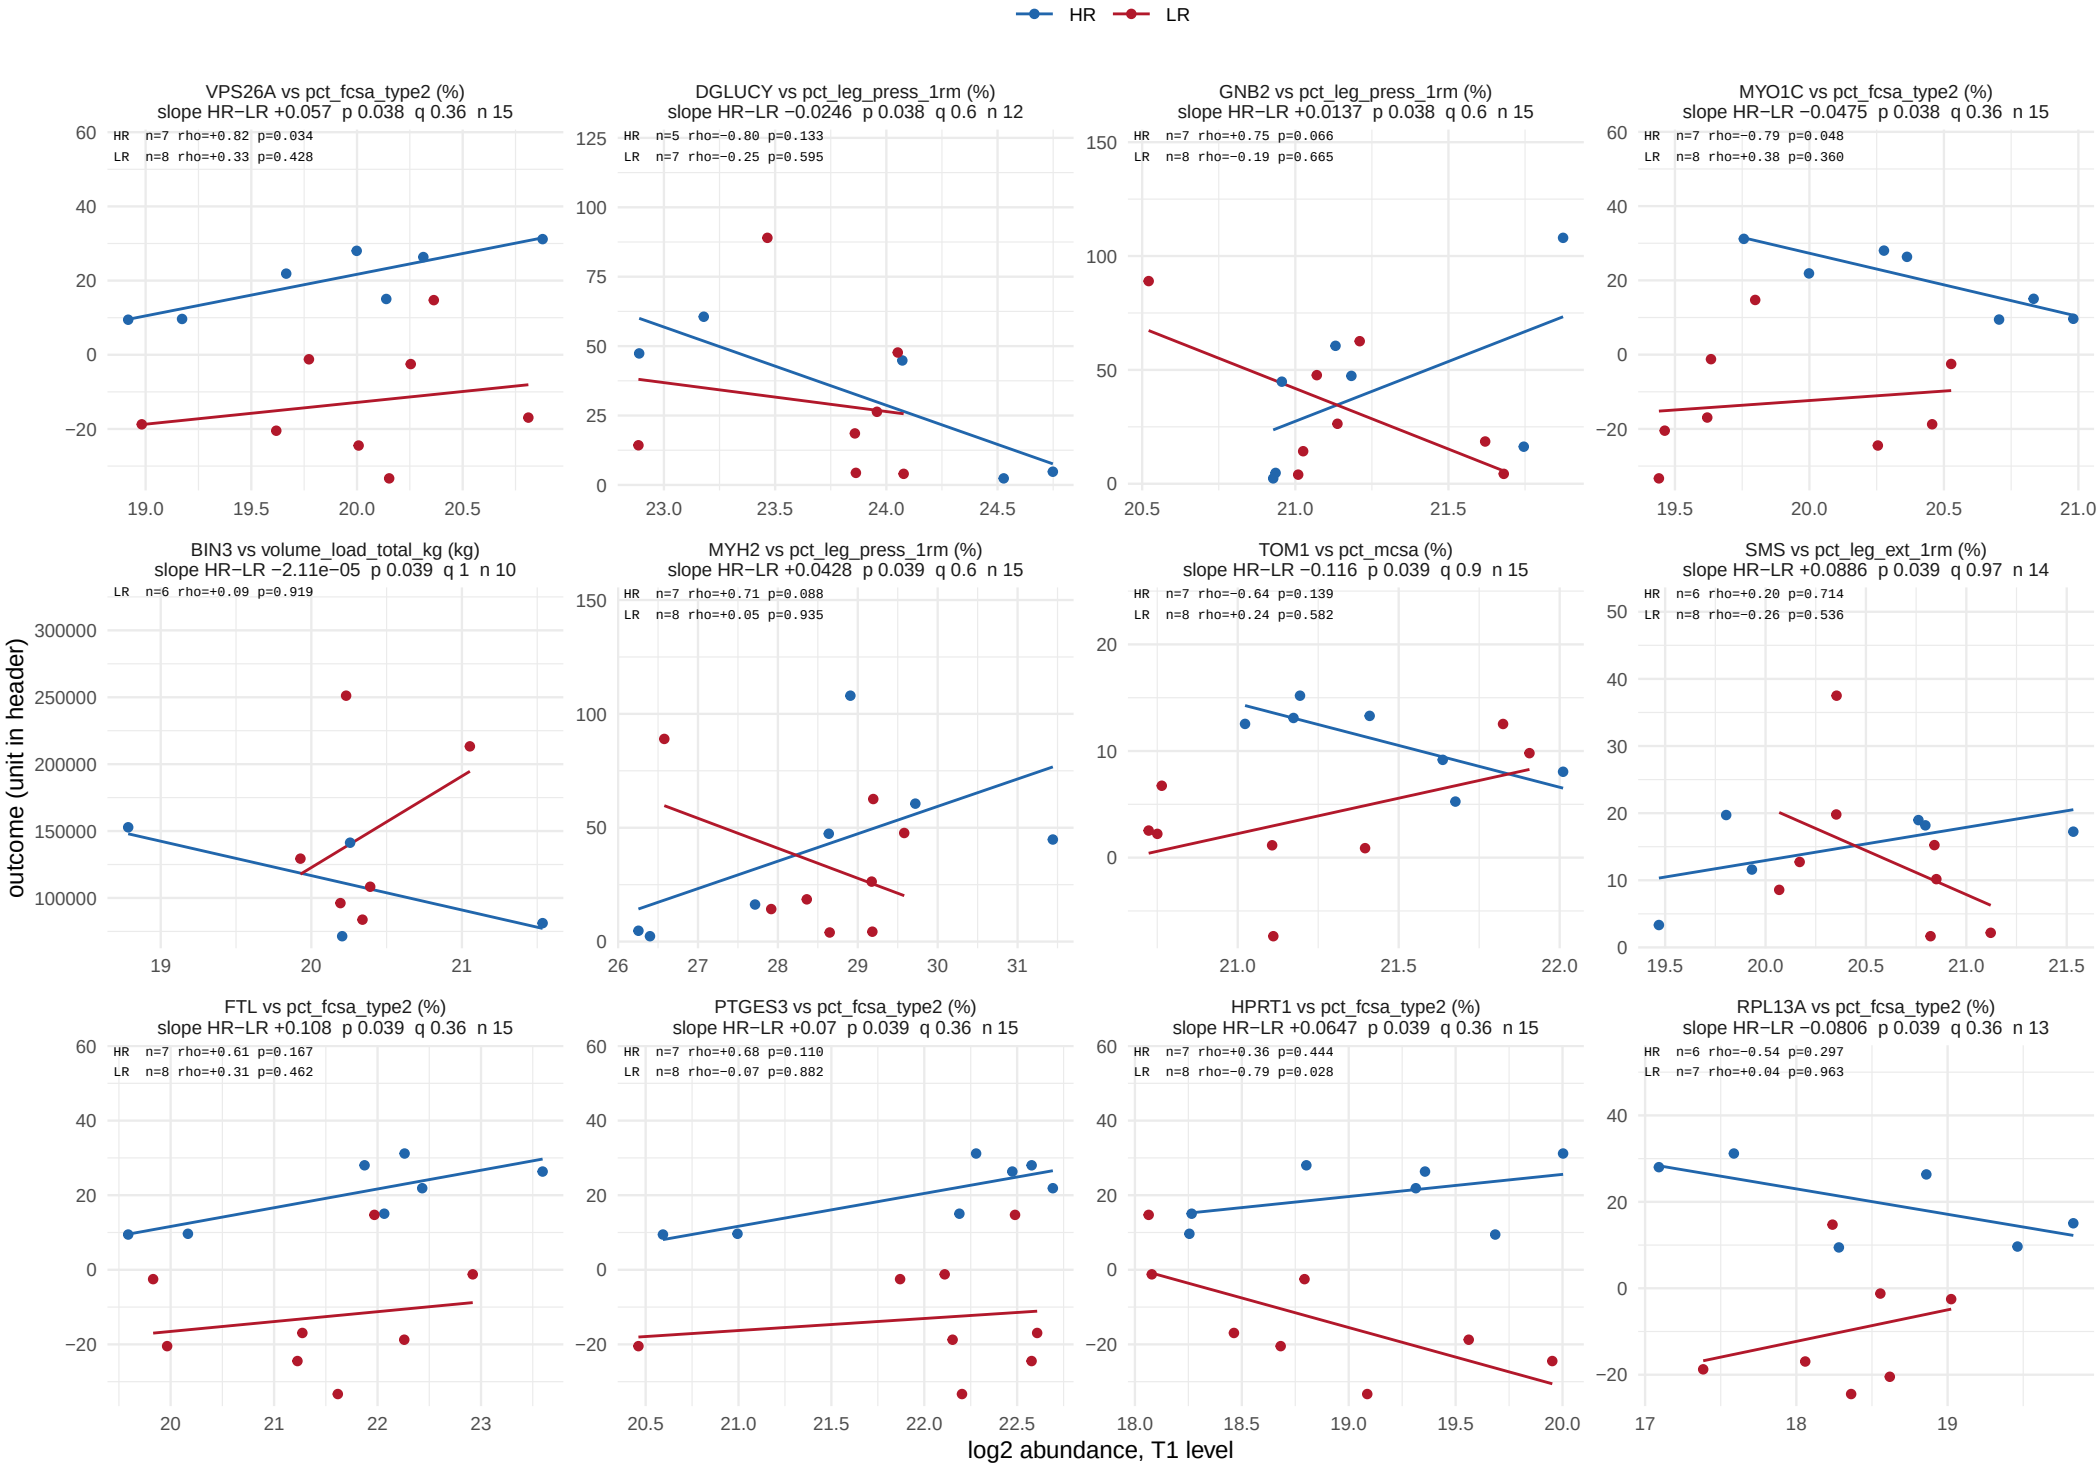

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


721 of 12553 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 48 of 61.

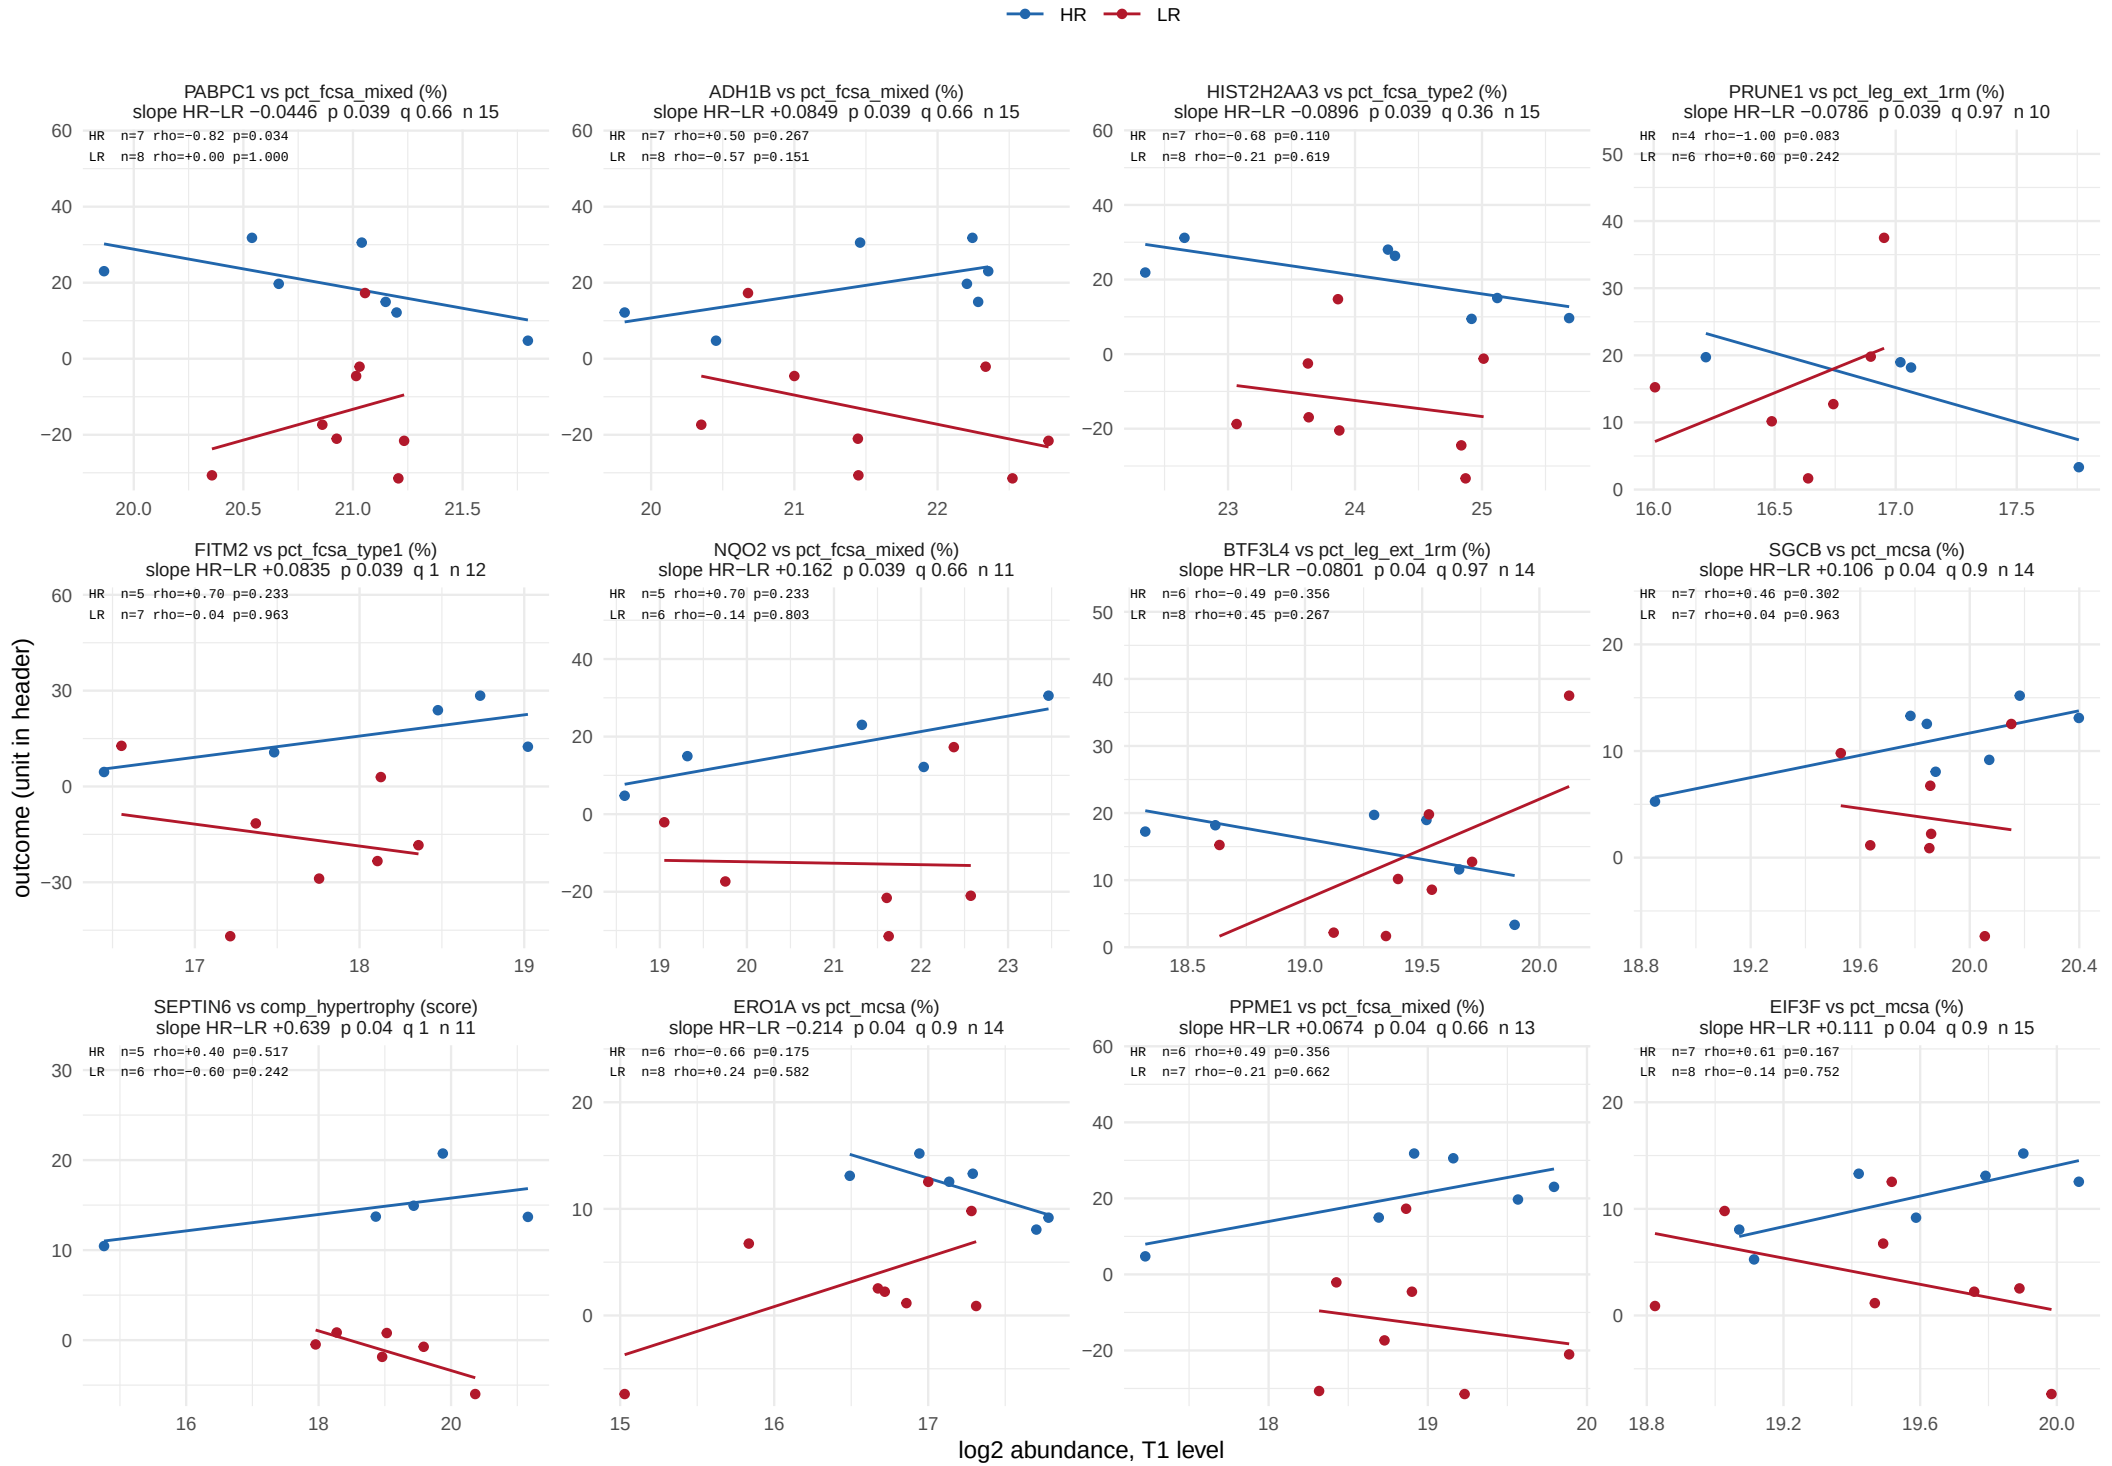

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


721 of 12553 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 49 of 61.

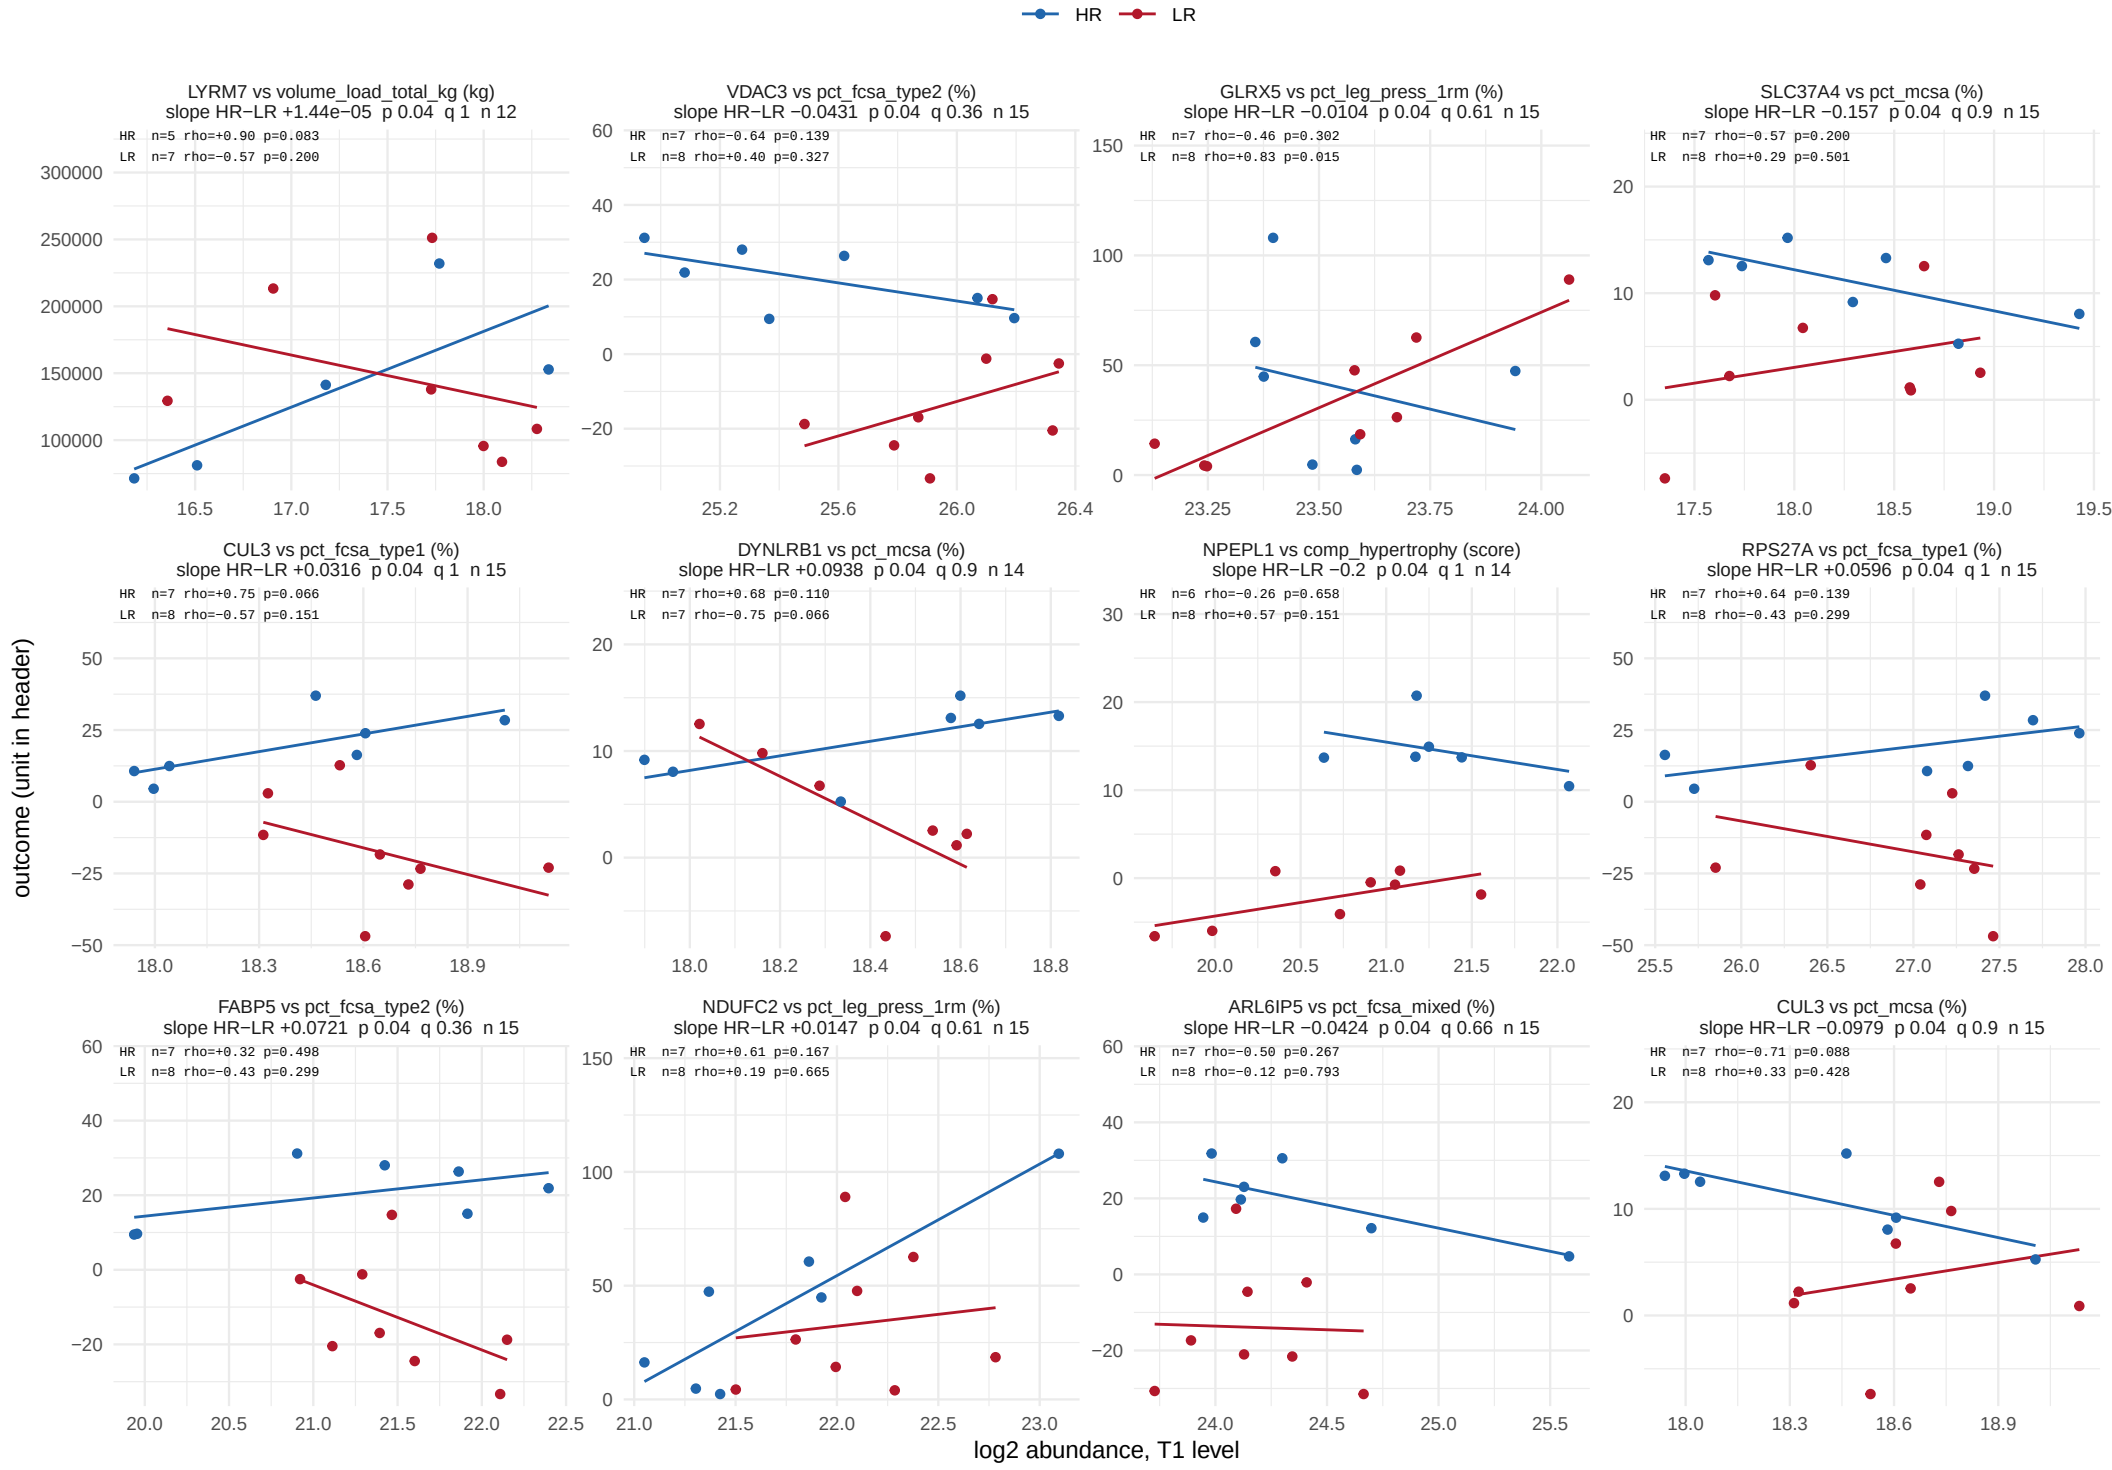

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


721 of 12553 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 50 of 61.

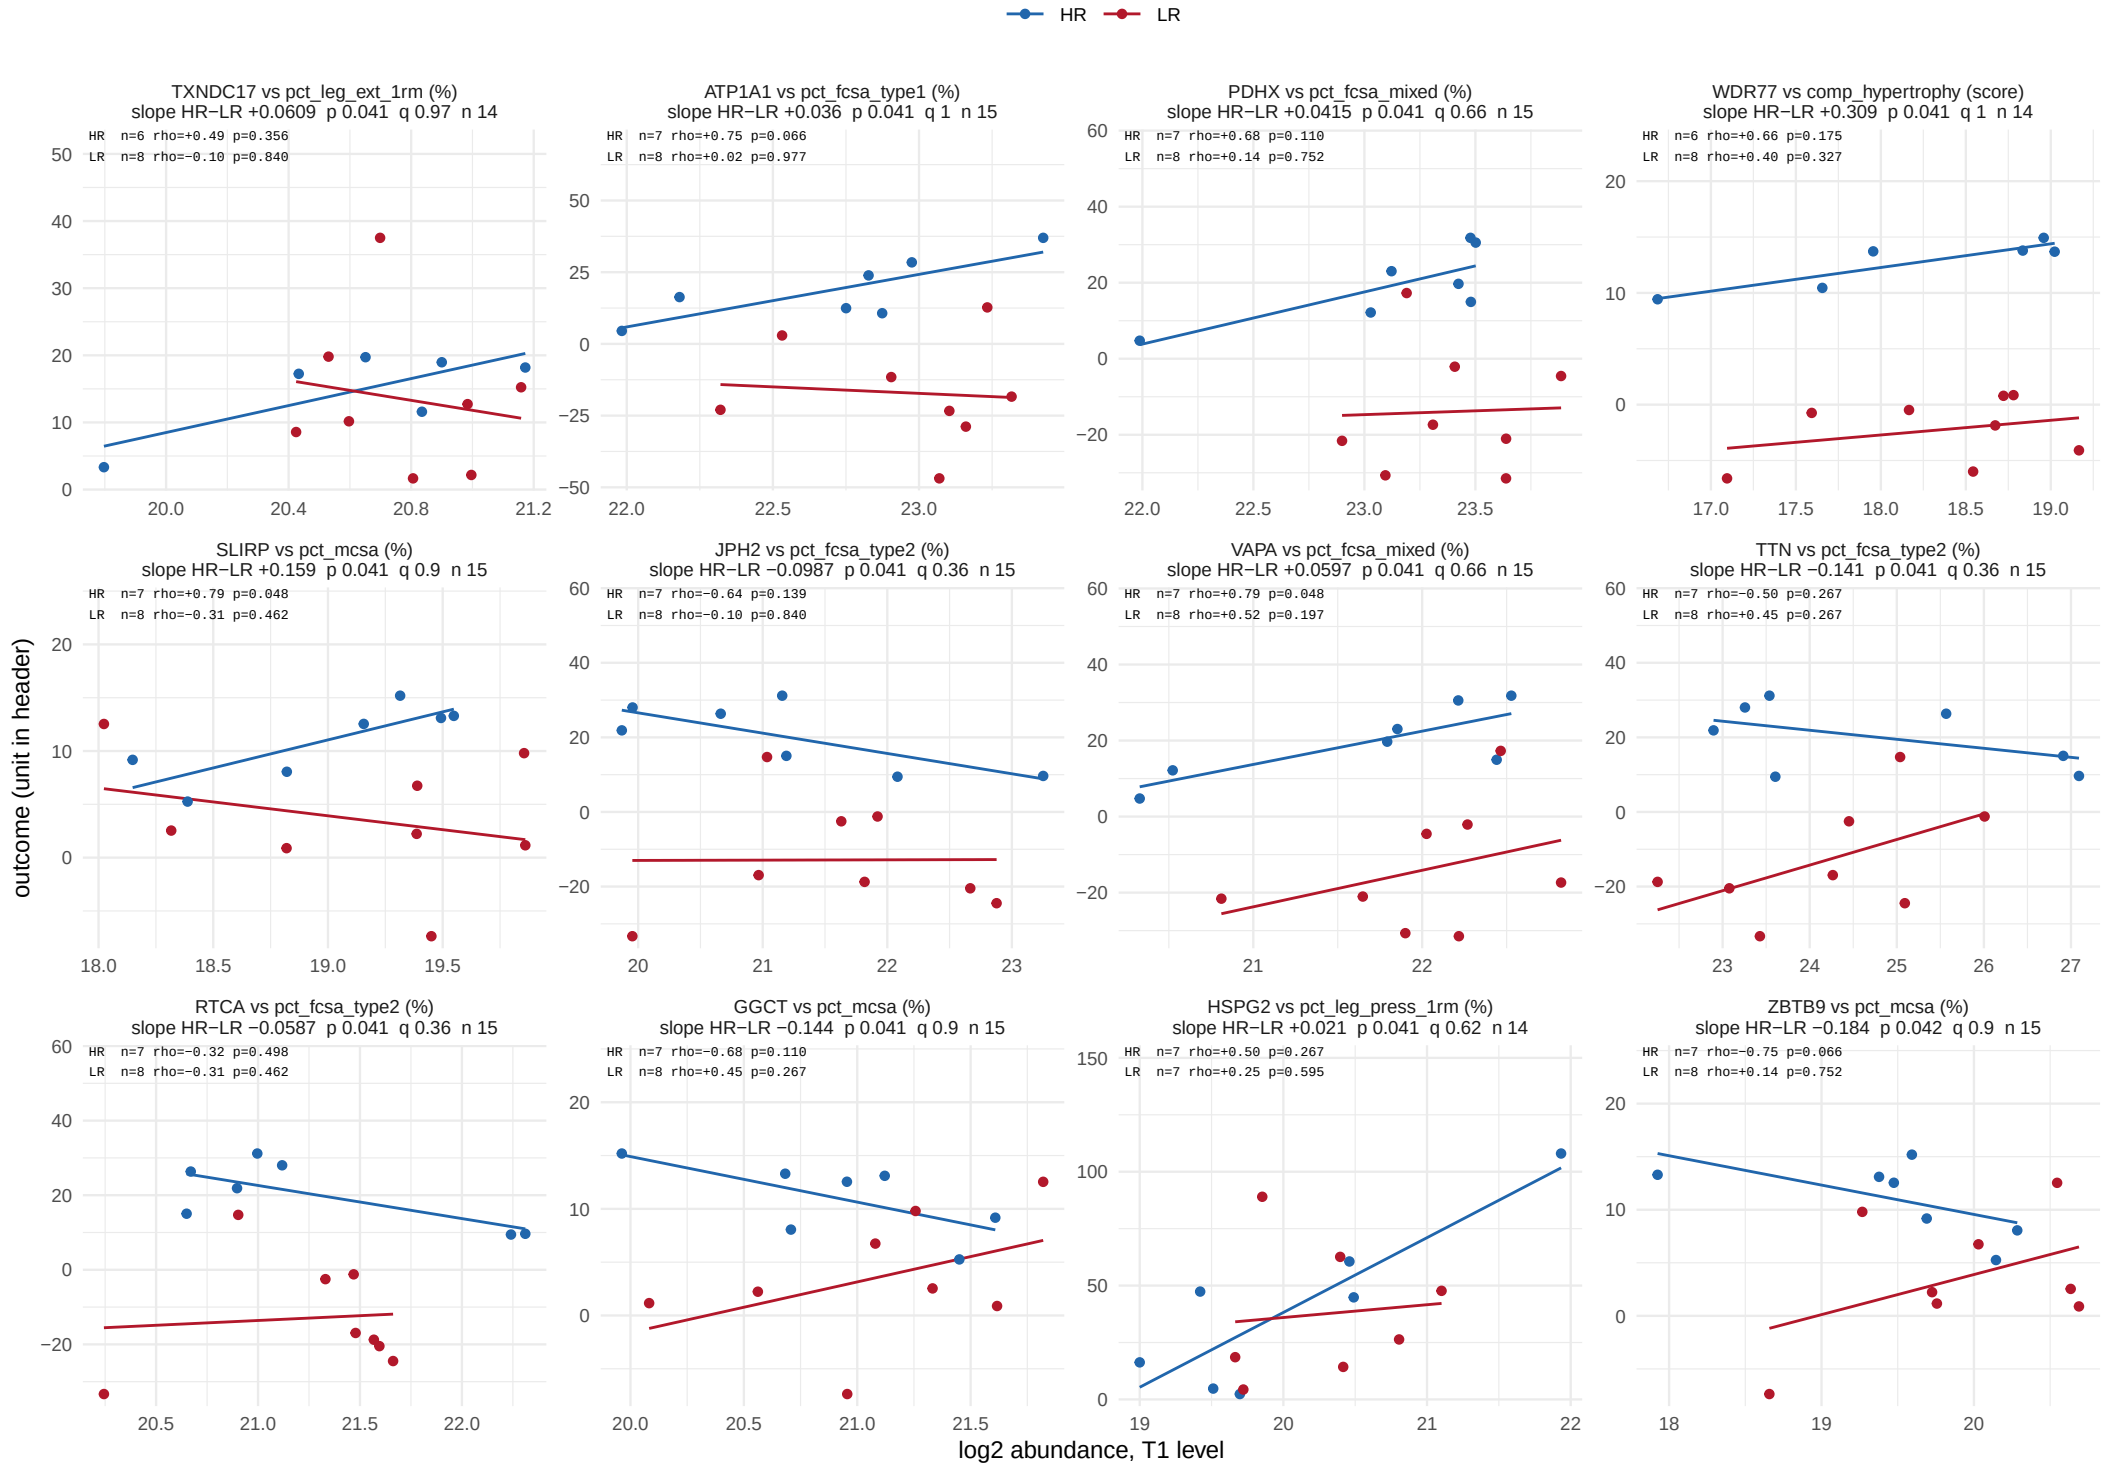

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


721 of 12553 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 51 of 61.

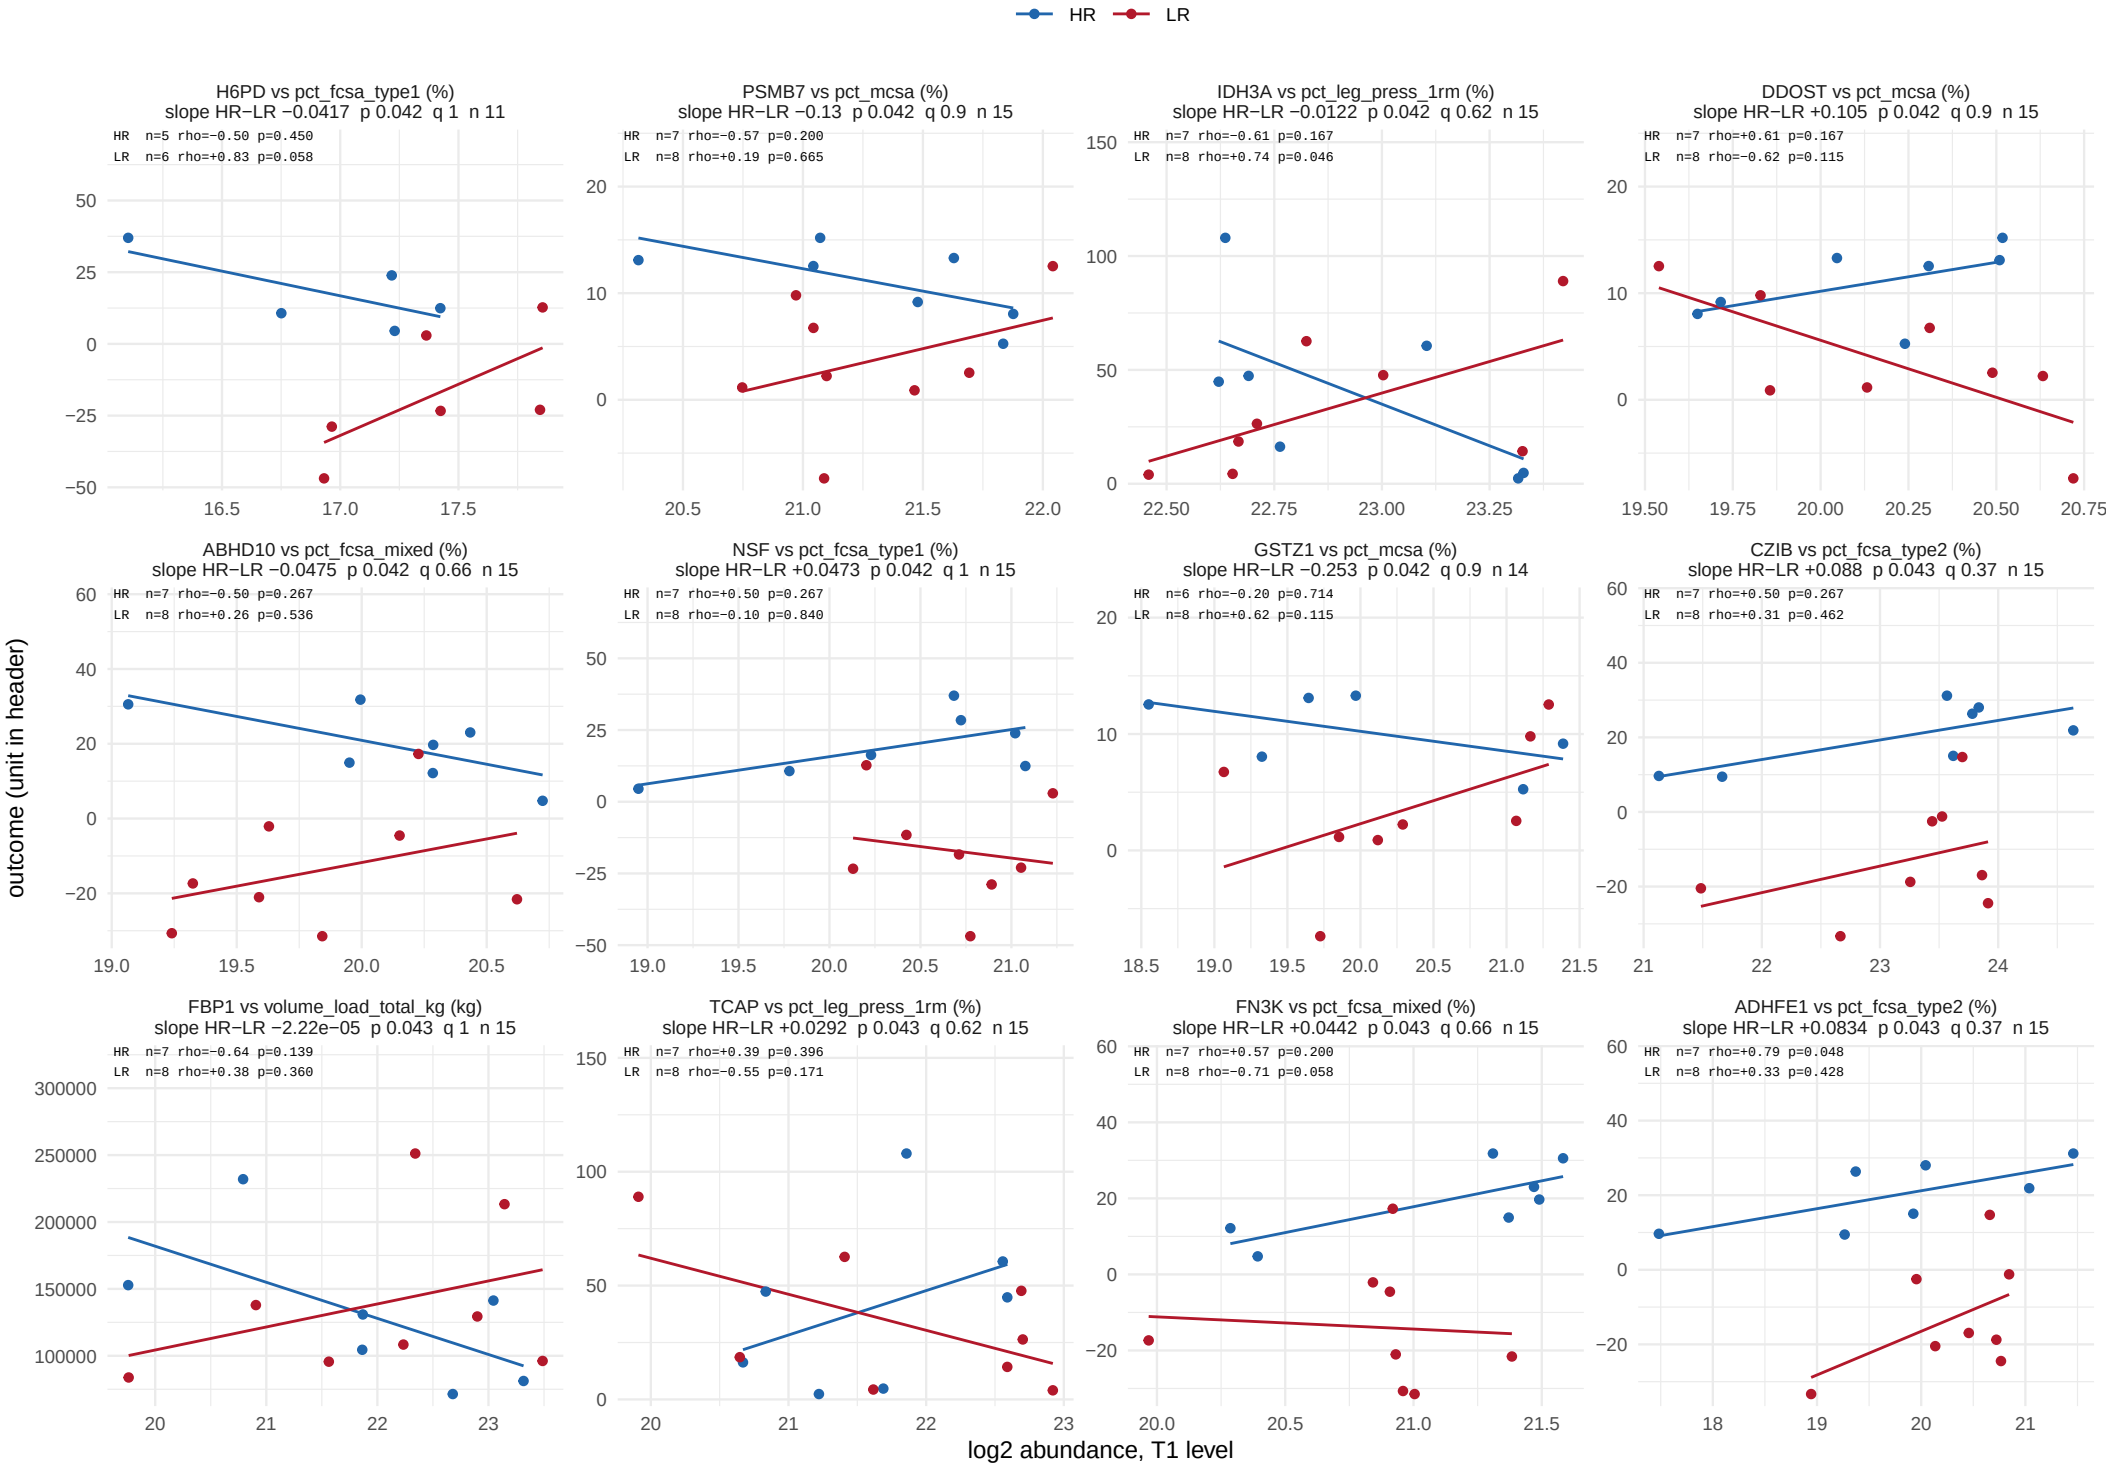

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


721 of 12553 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 52 of 61.

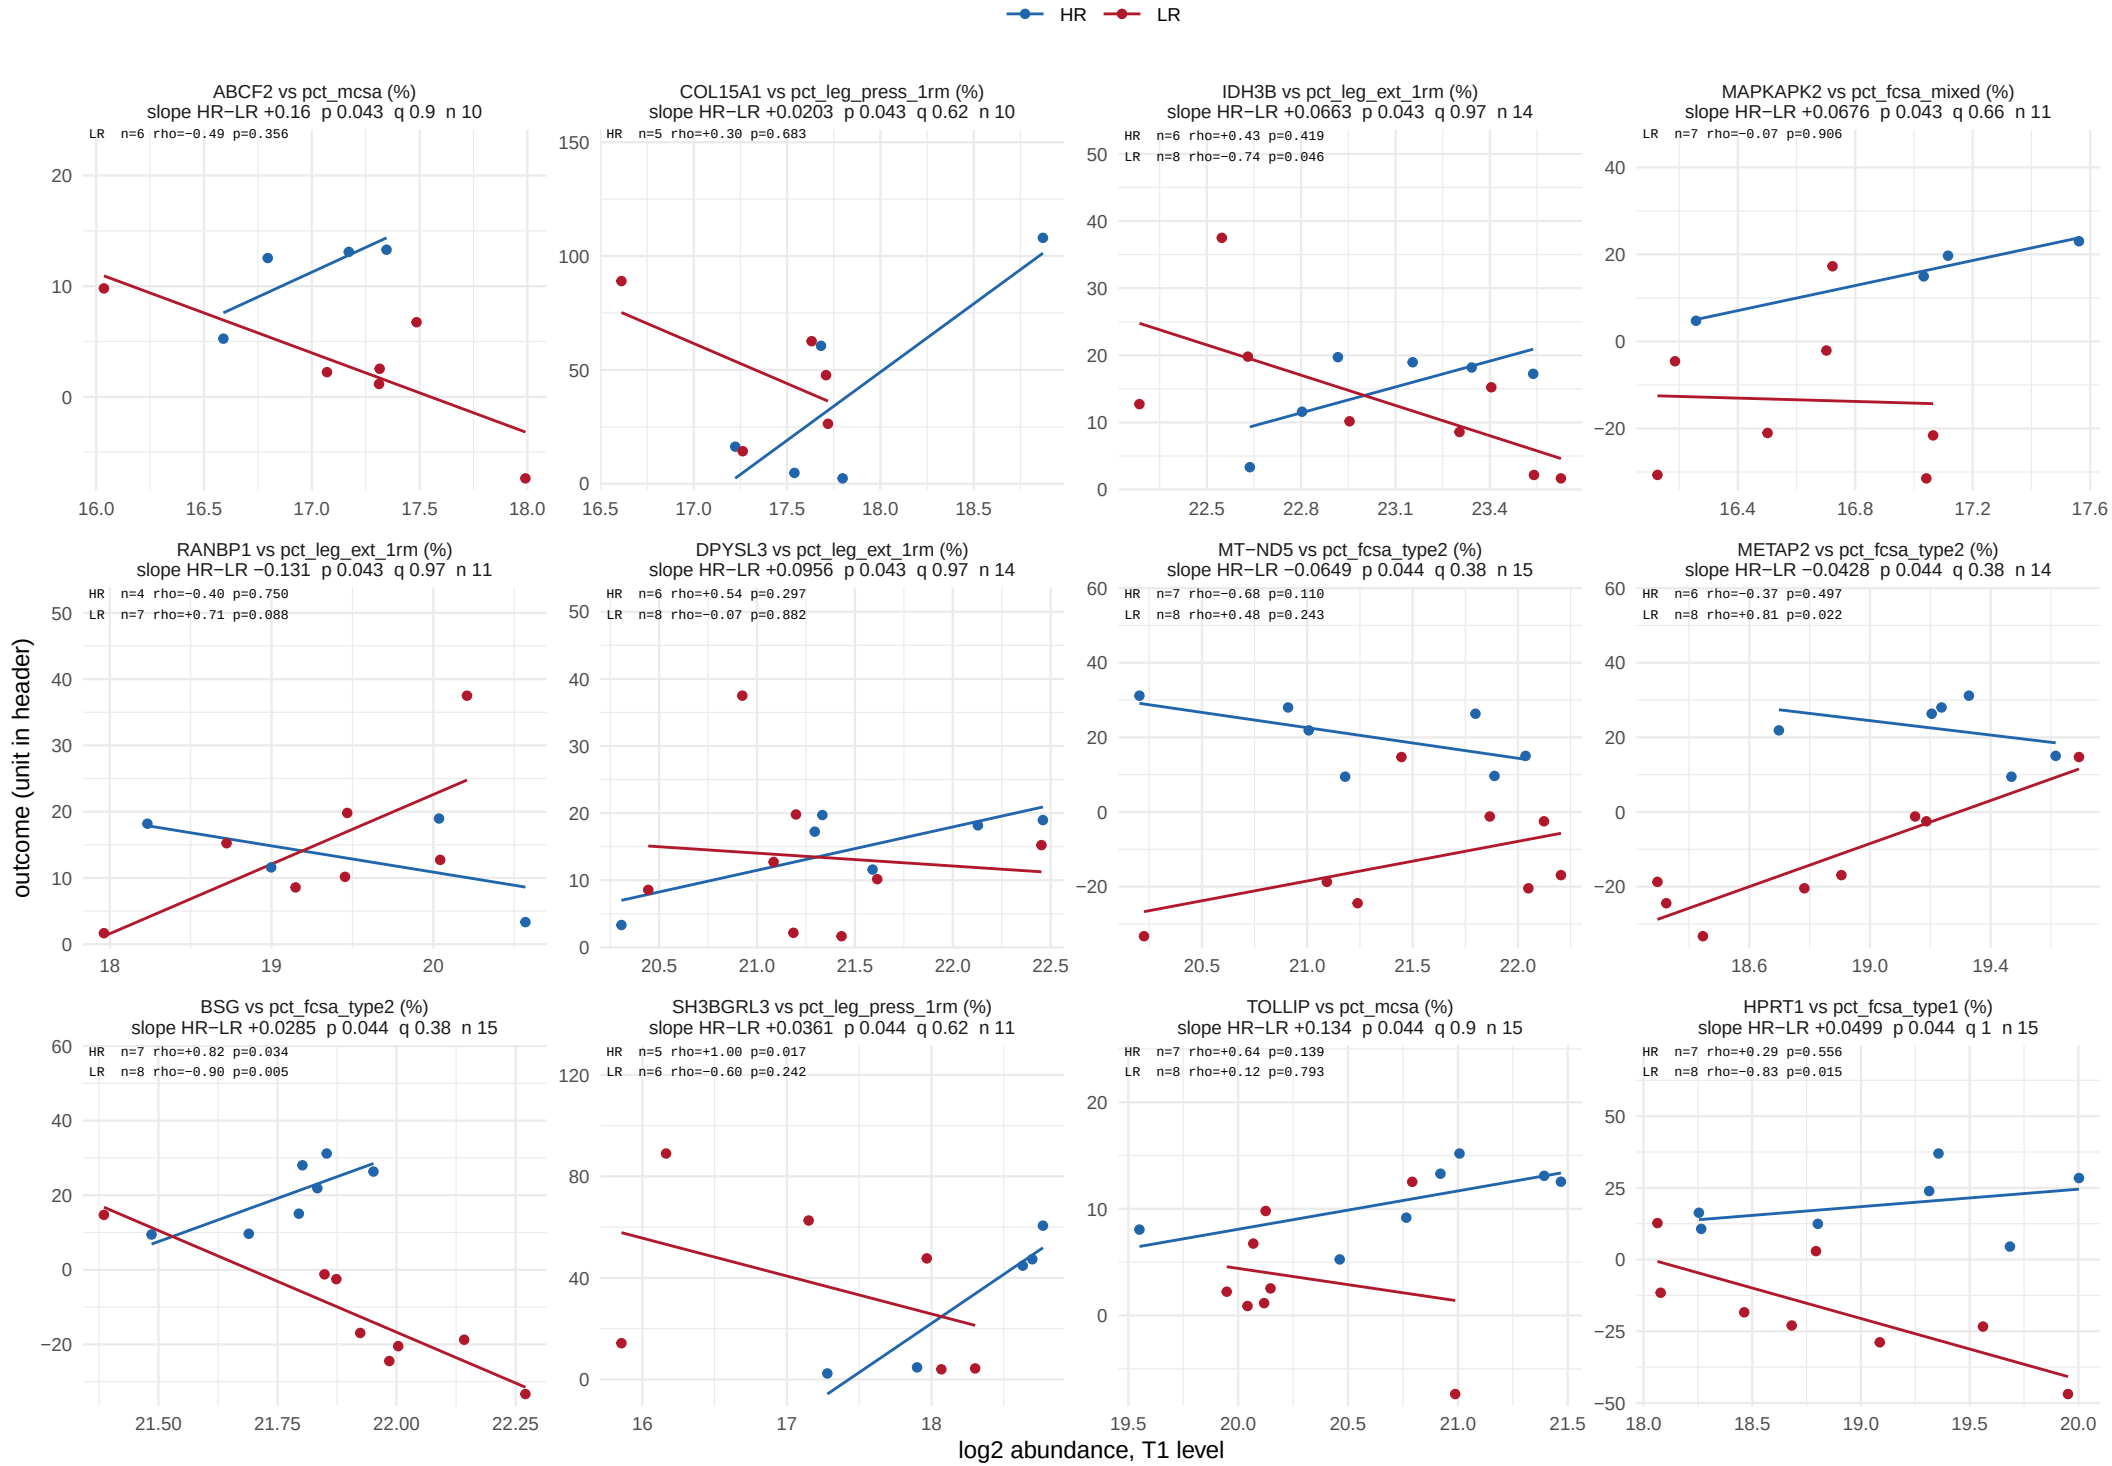

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


721 of 12553 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 53 of 61.

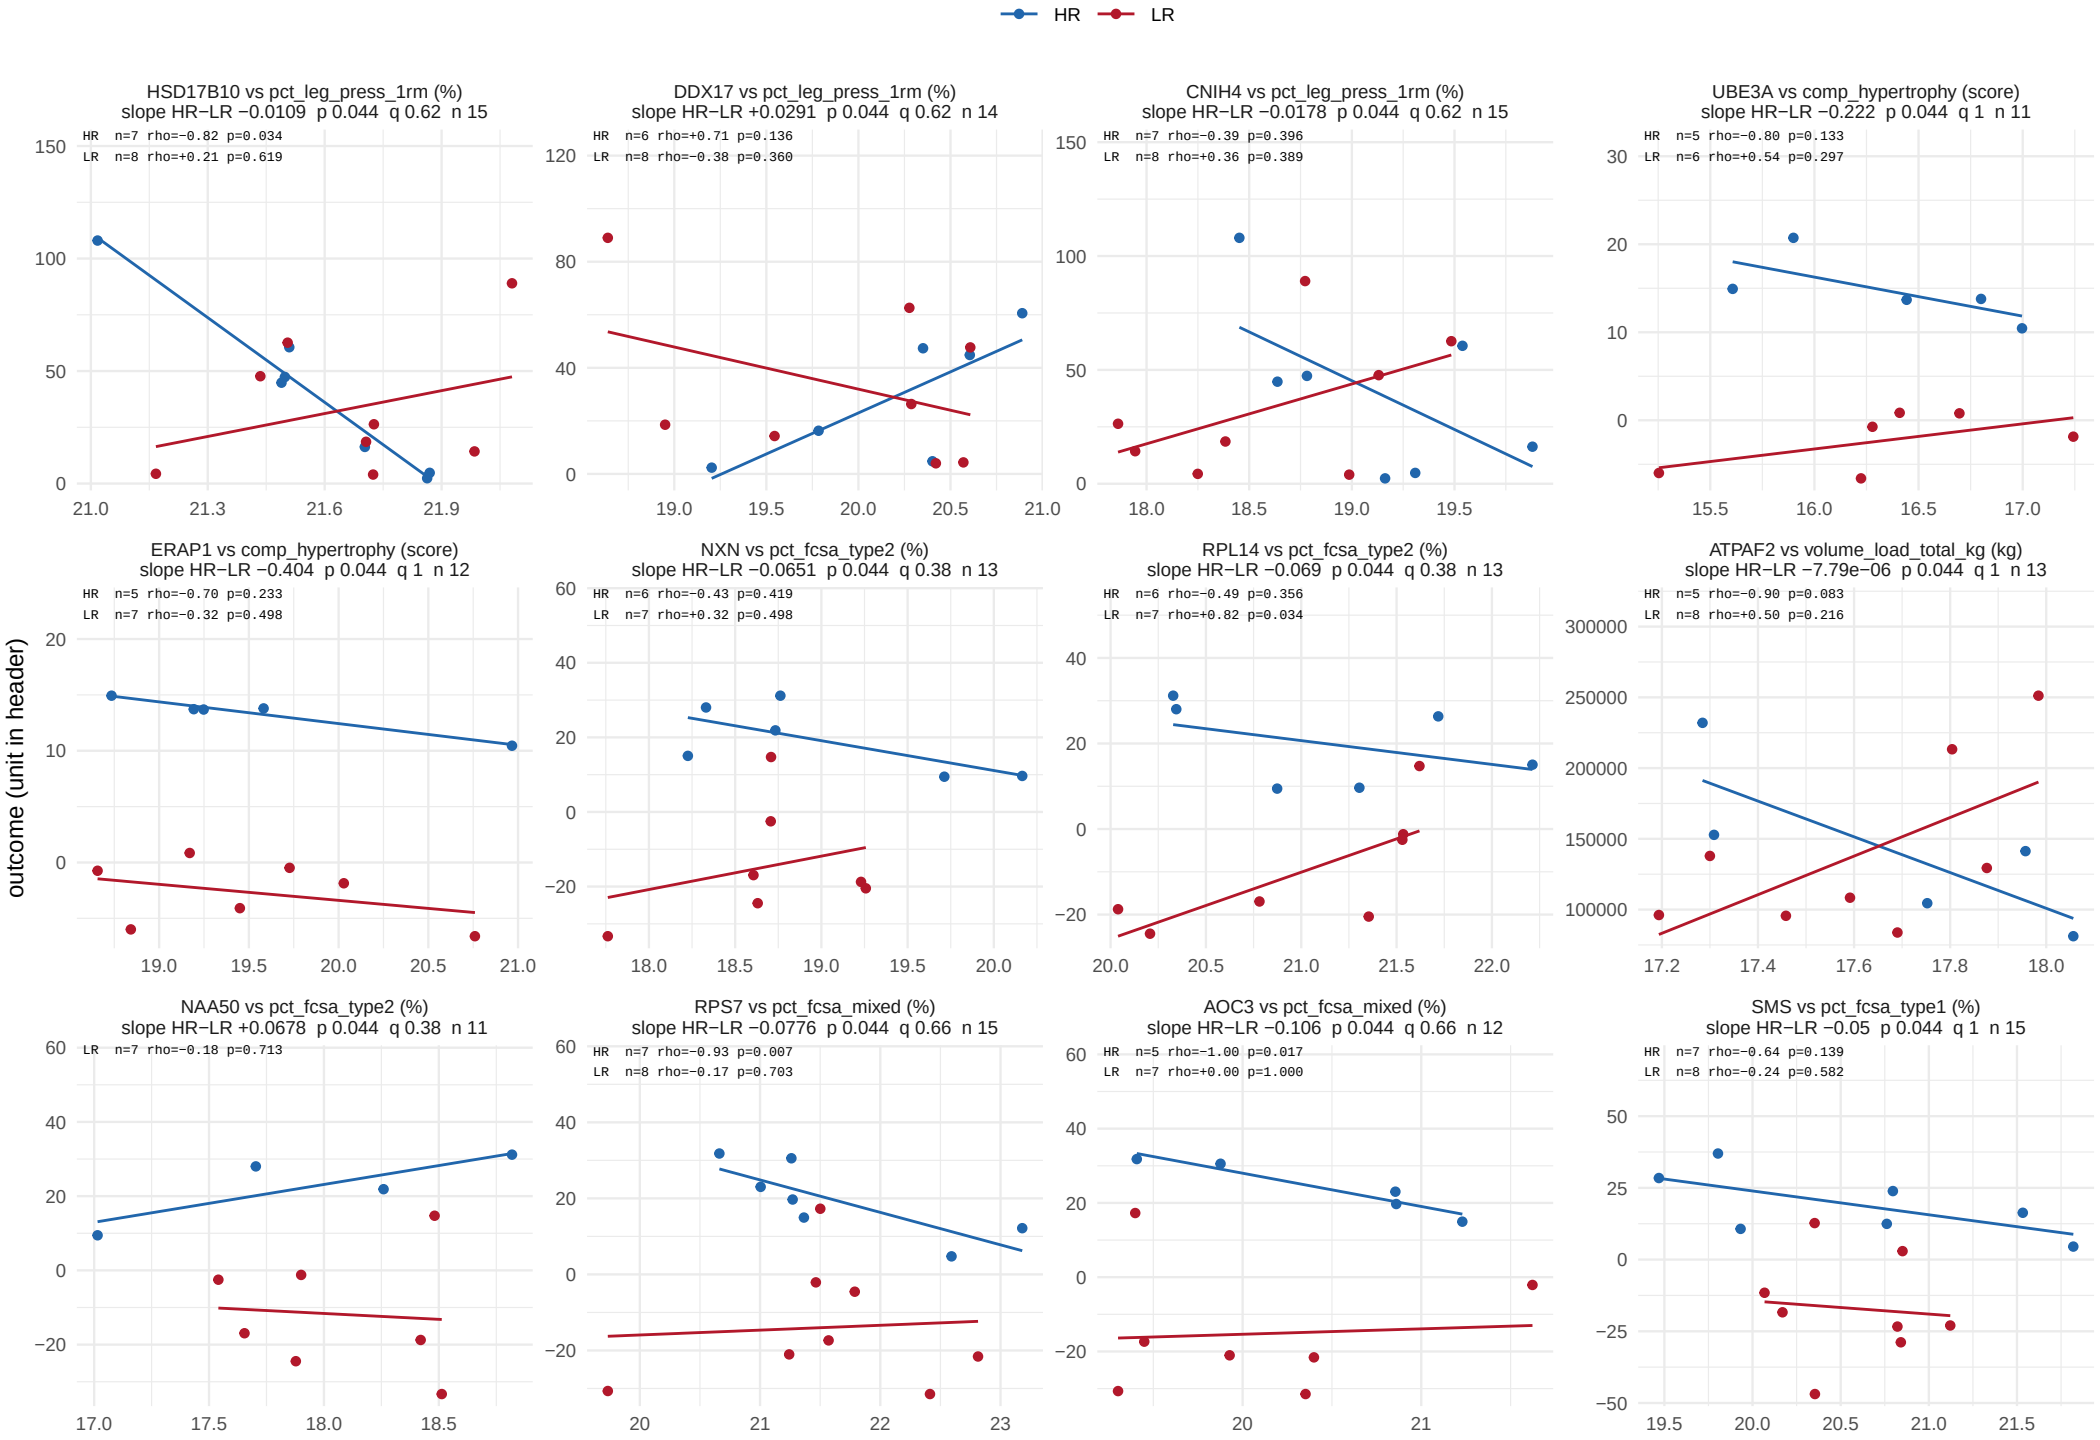

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


721 of 12553 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 54 of 61.

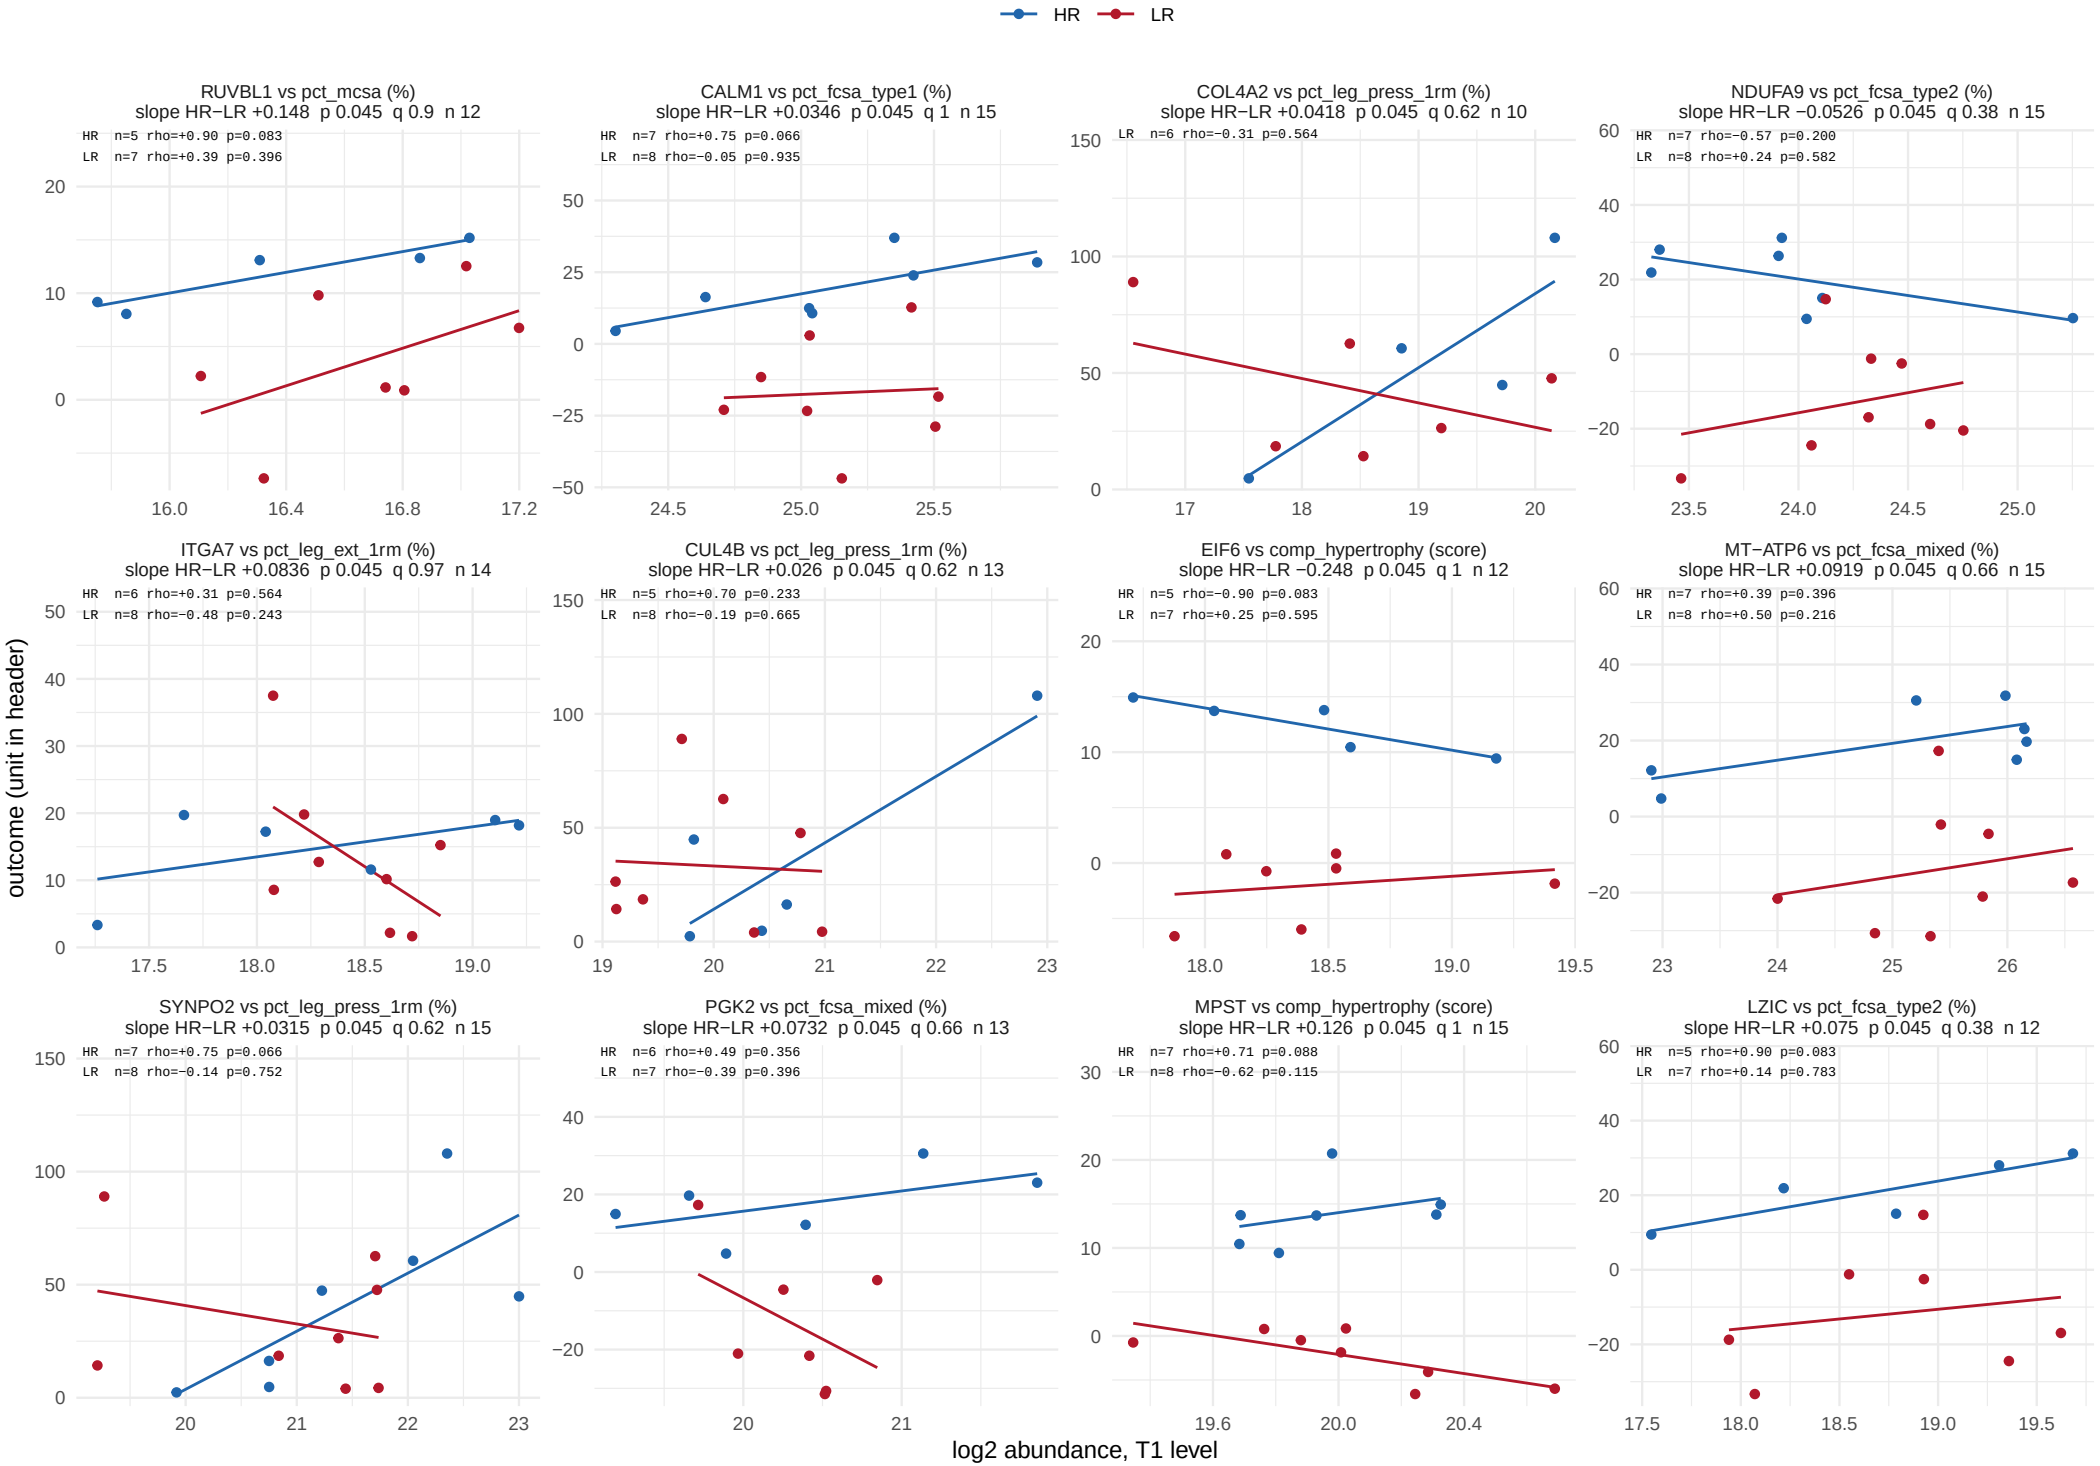

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


721 of 12553 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 55 of 61.

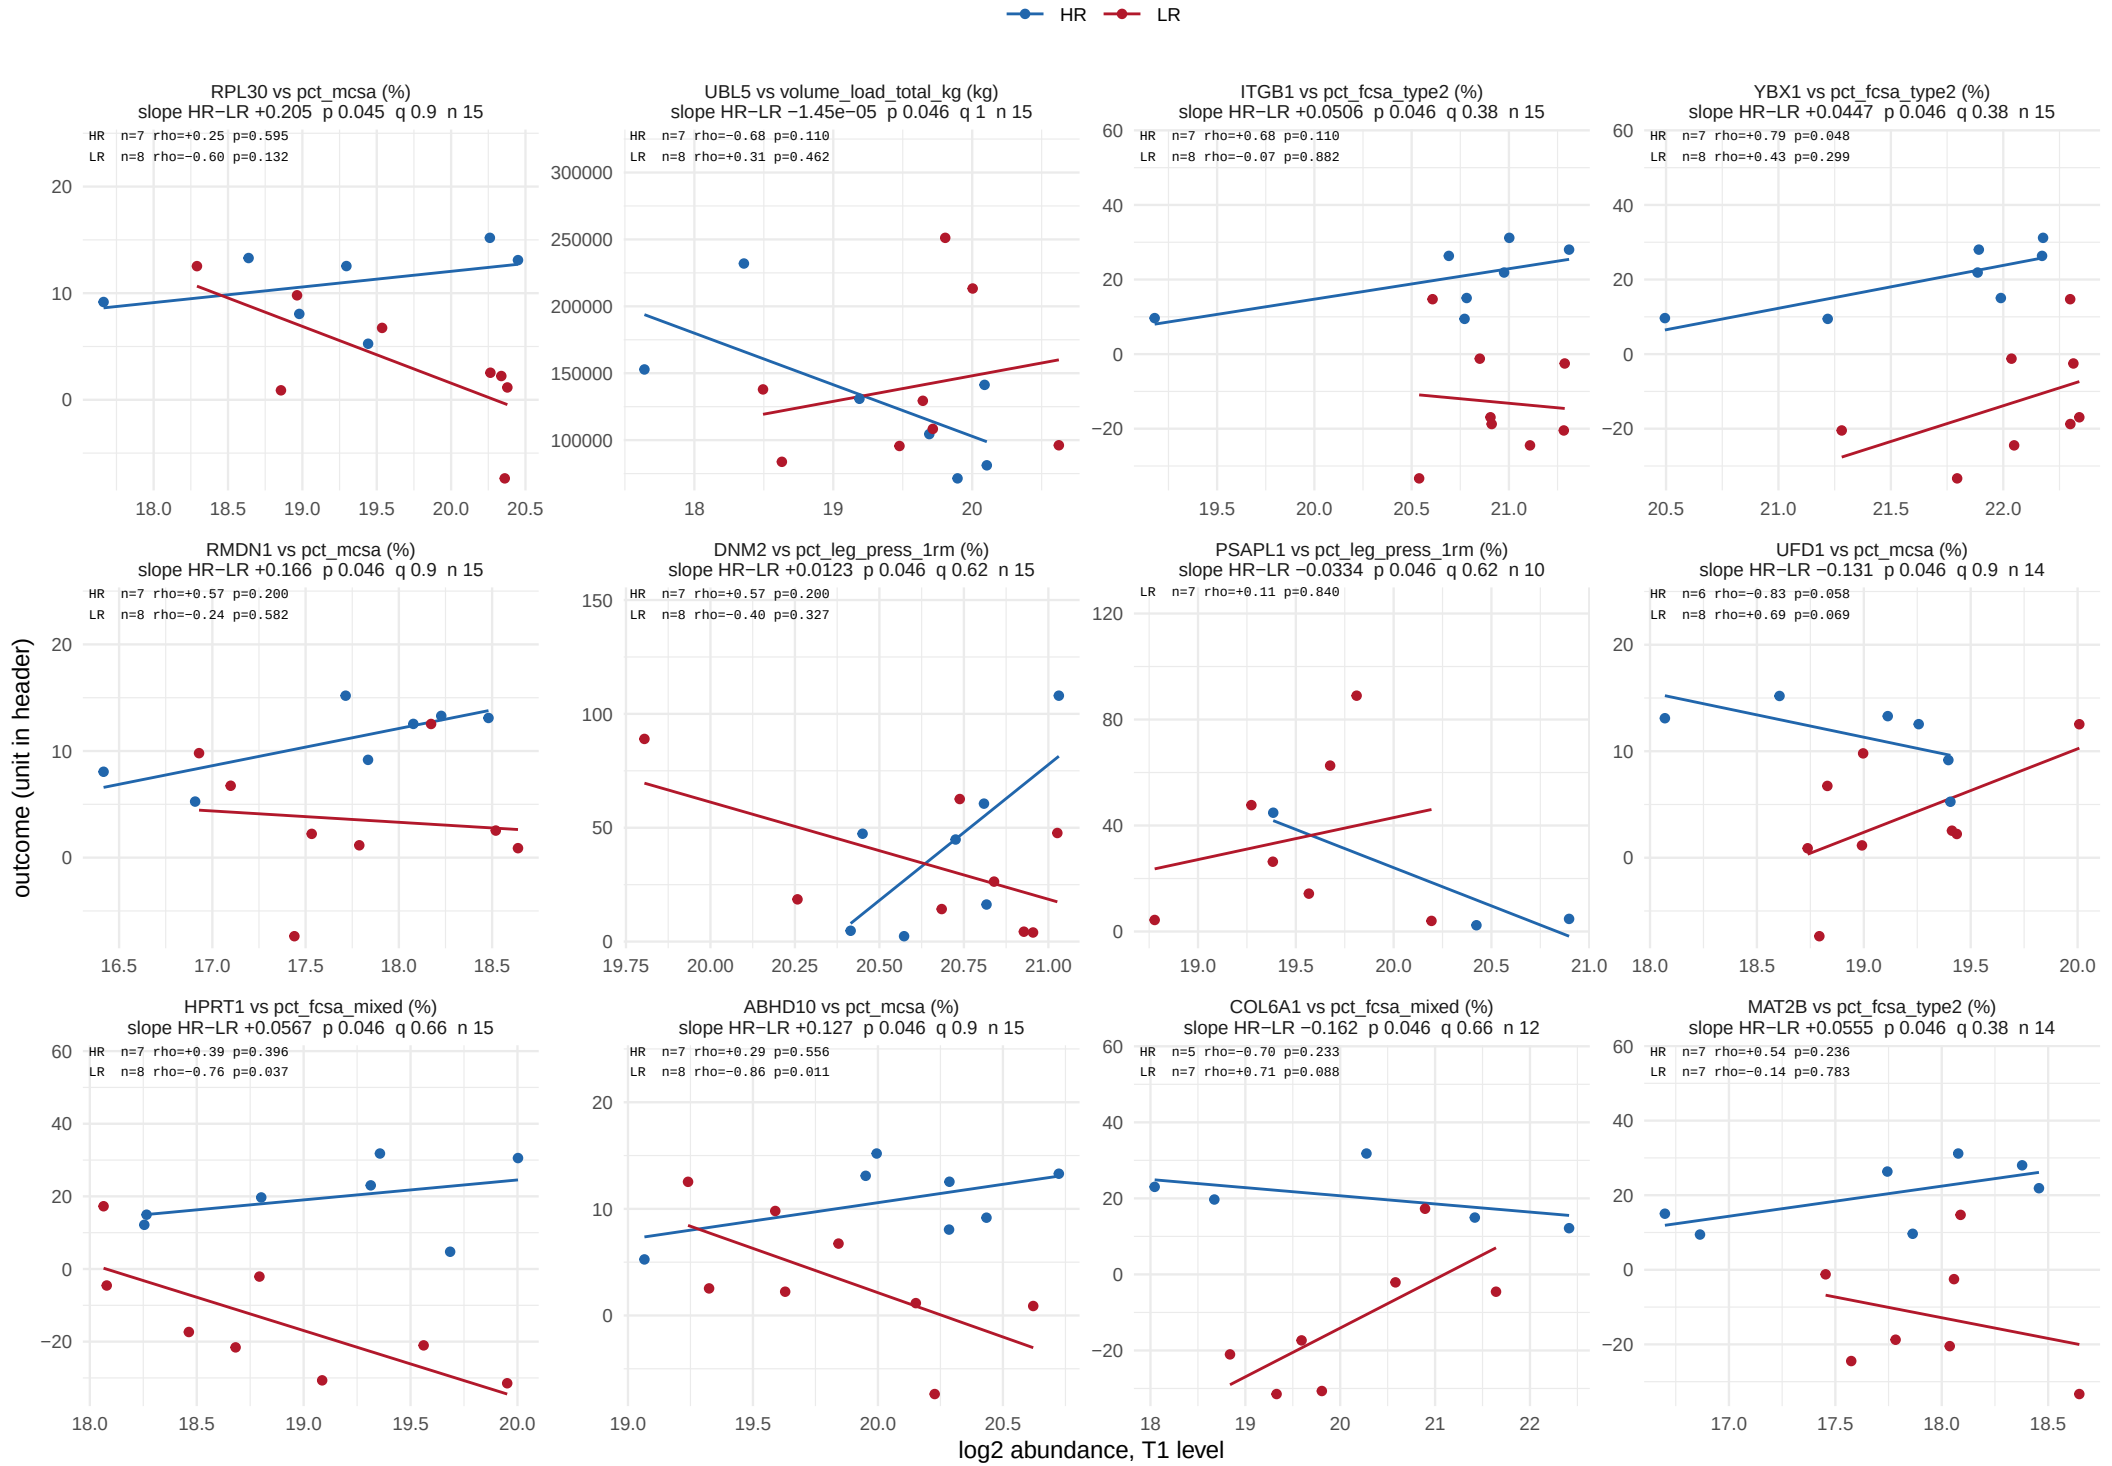

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


721 of 12553 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 56 of 61.

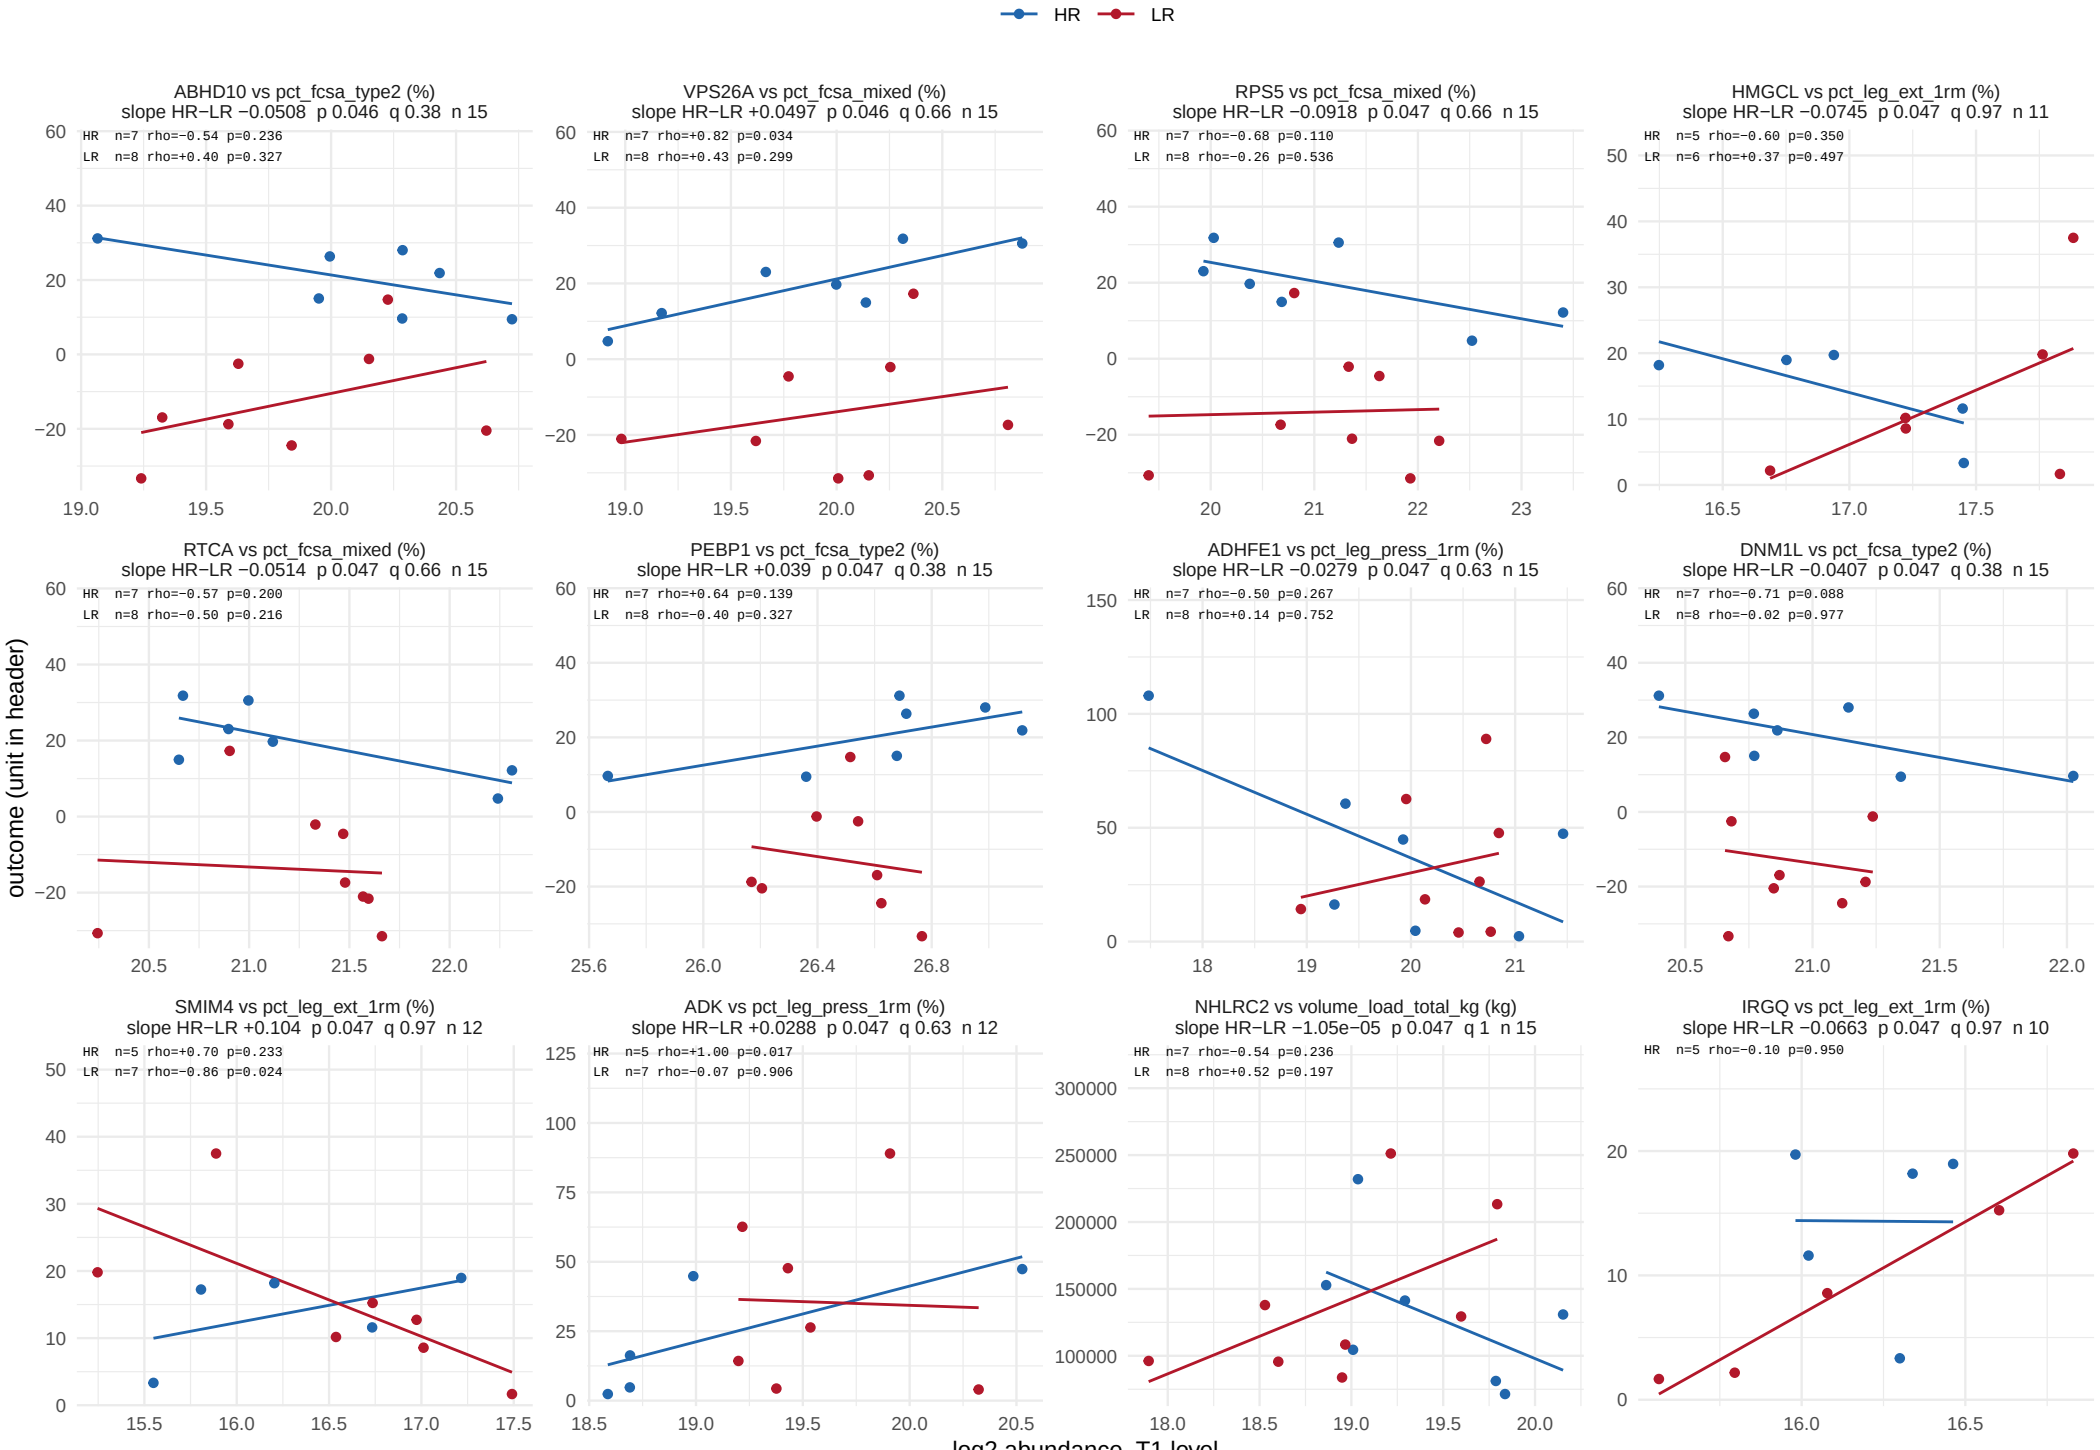

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


721 of 12553 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 57 of 61.

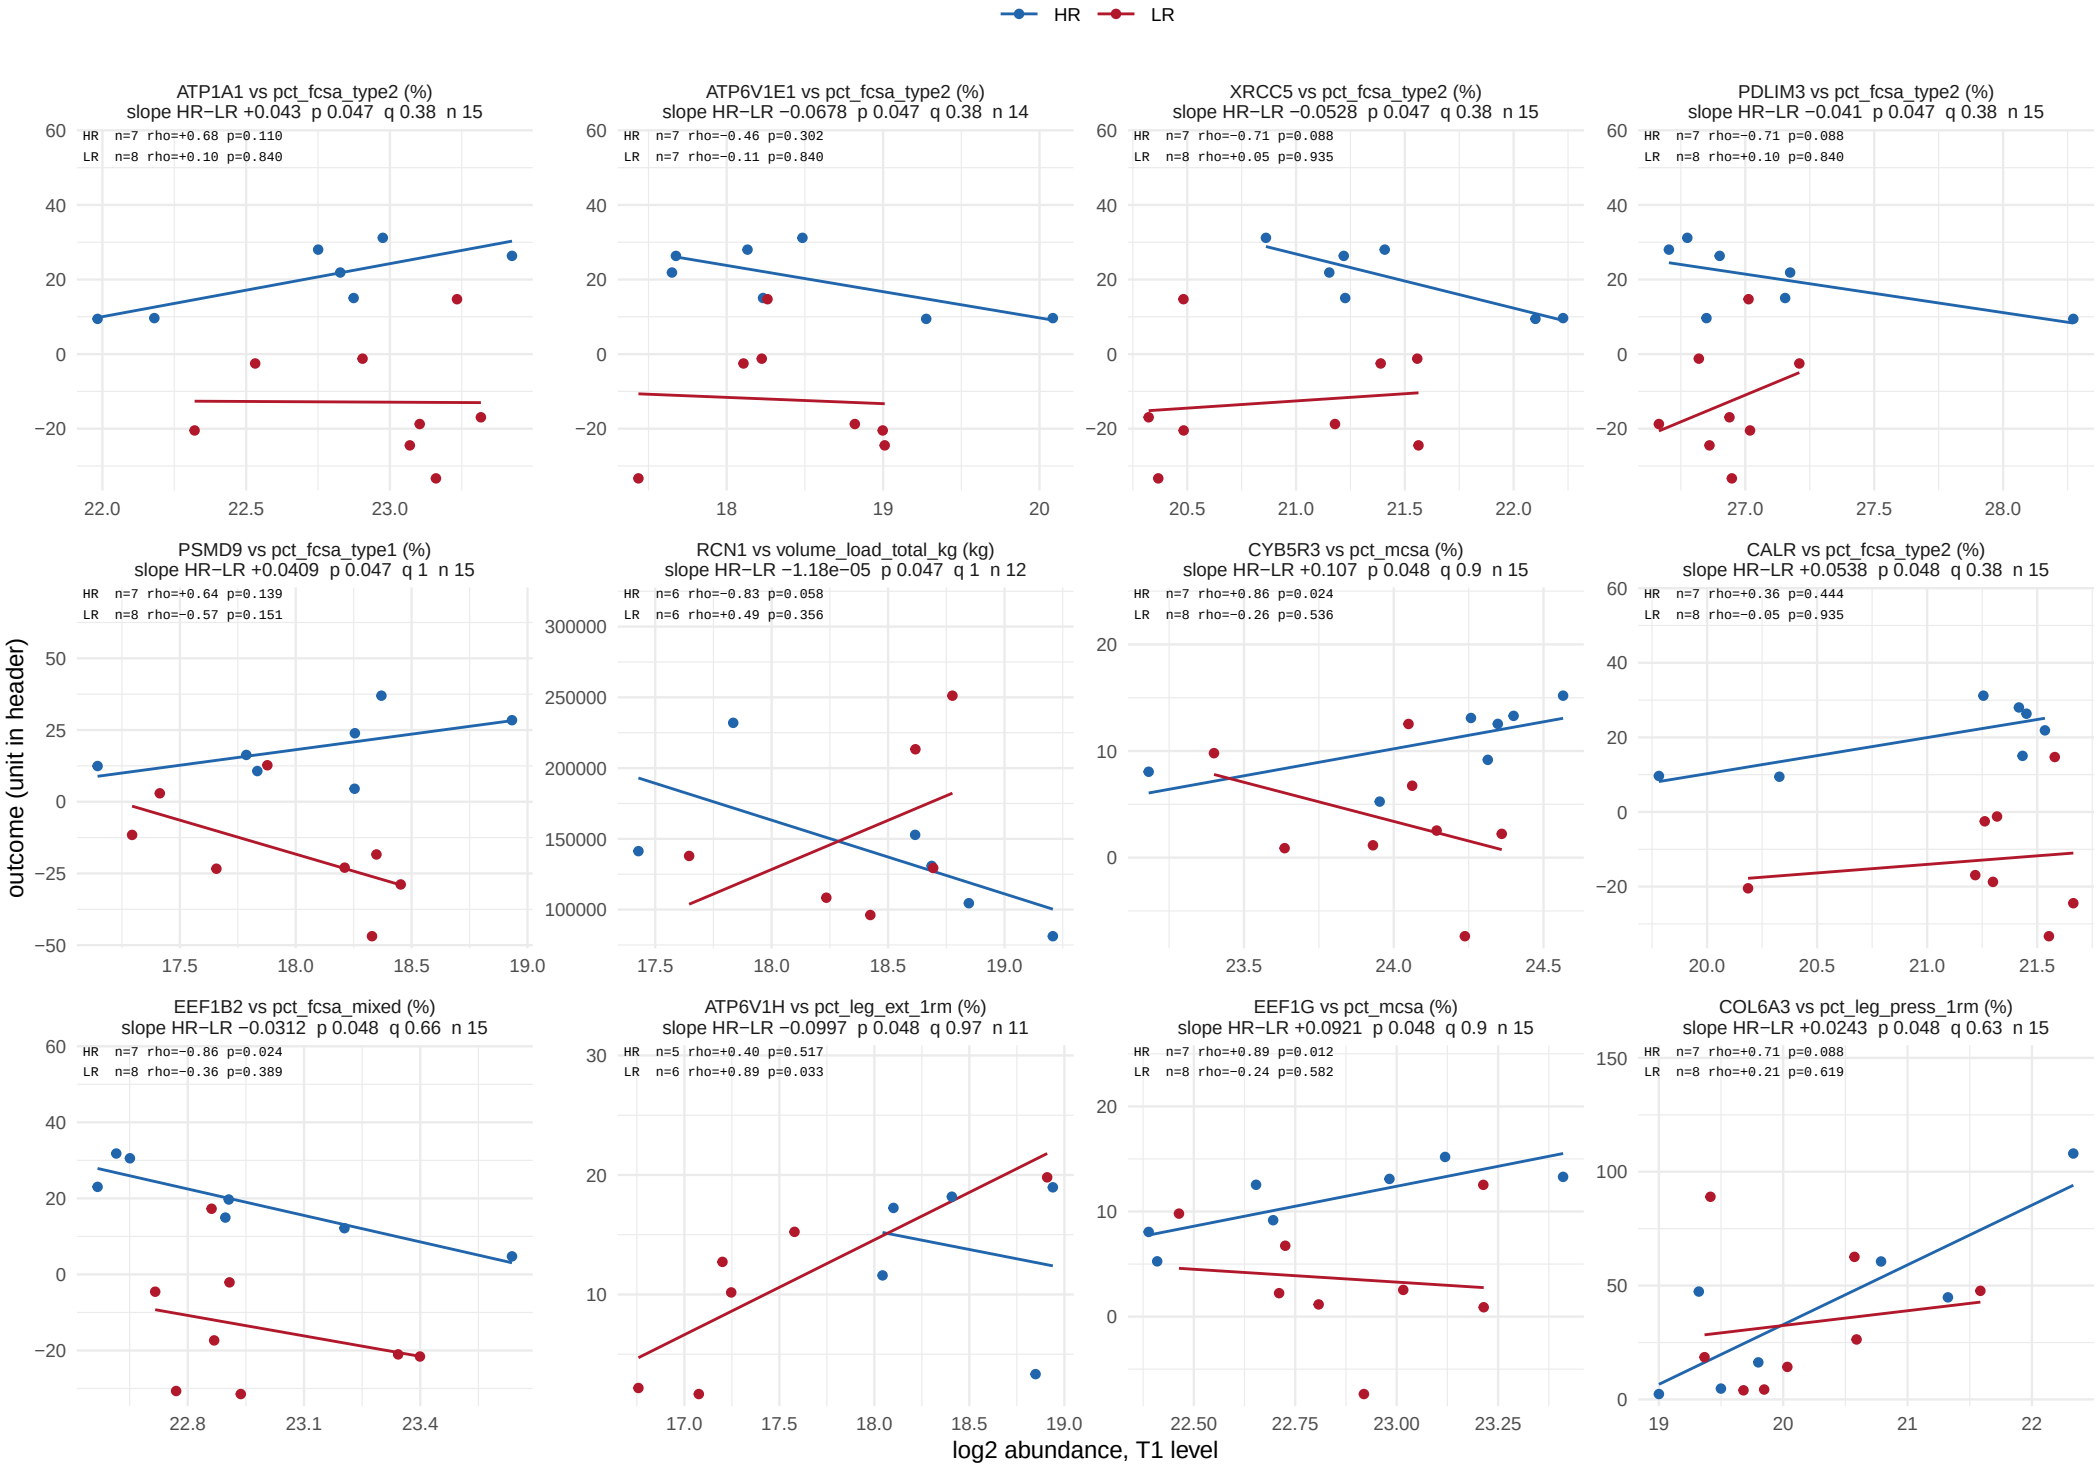

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


721 of 12553 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 58 of 61.

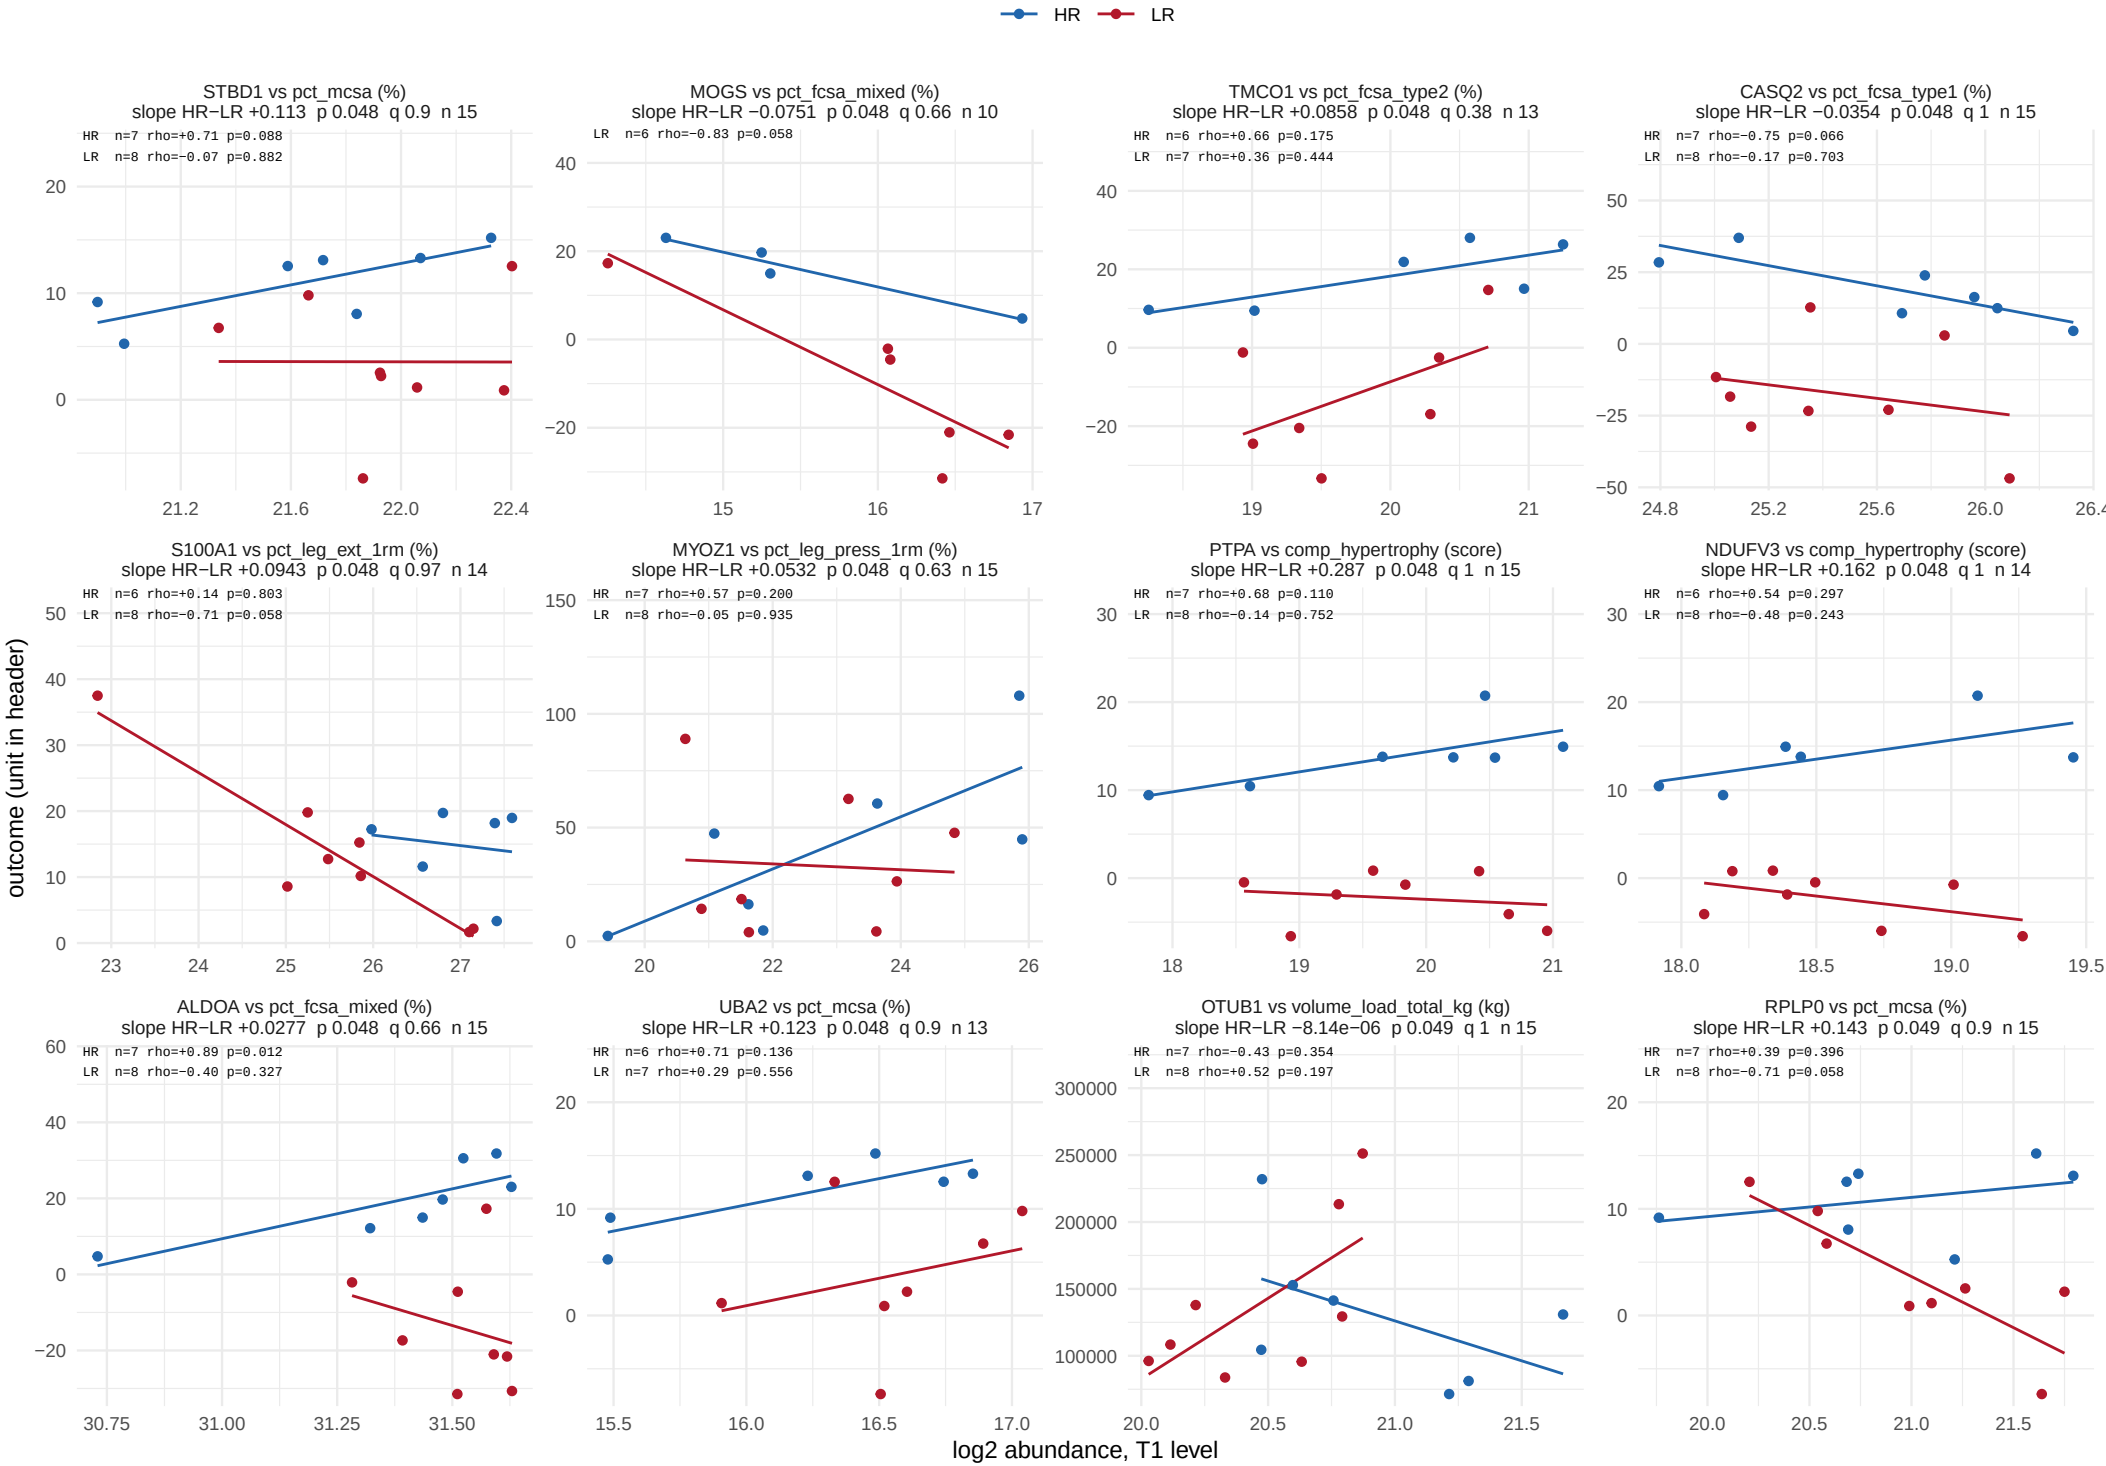

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


721 of 12553 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 59 of 61.

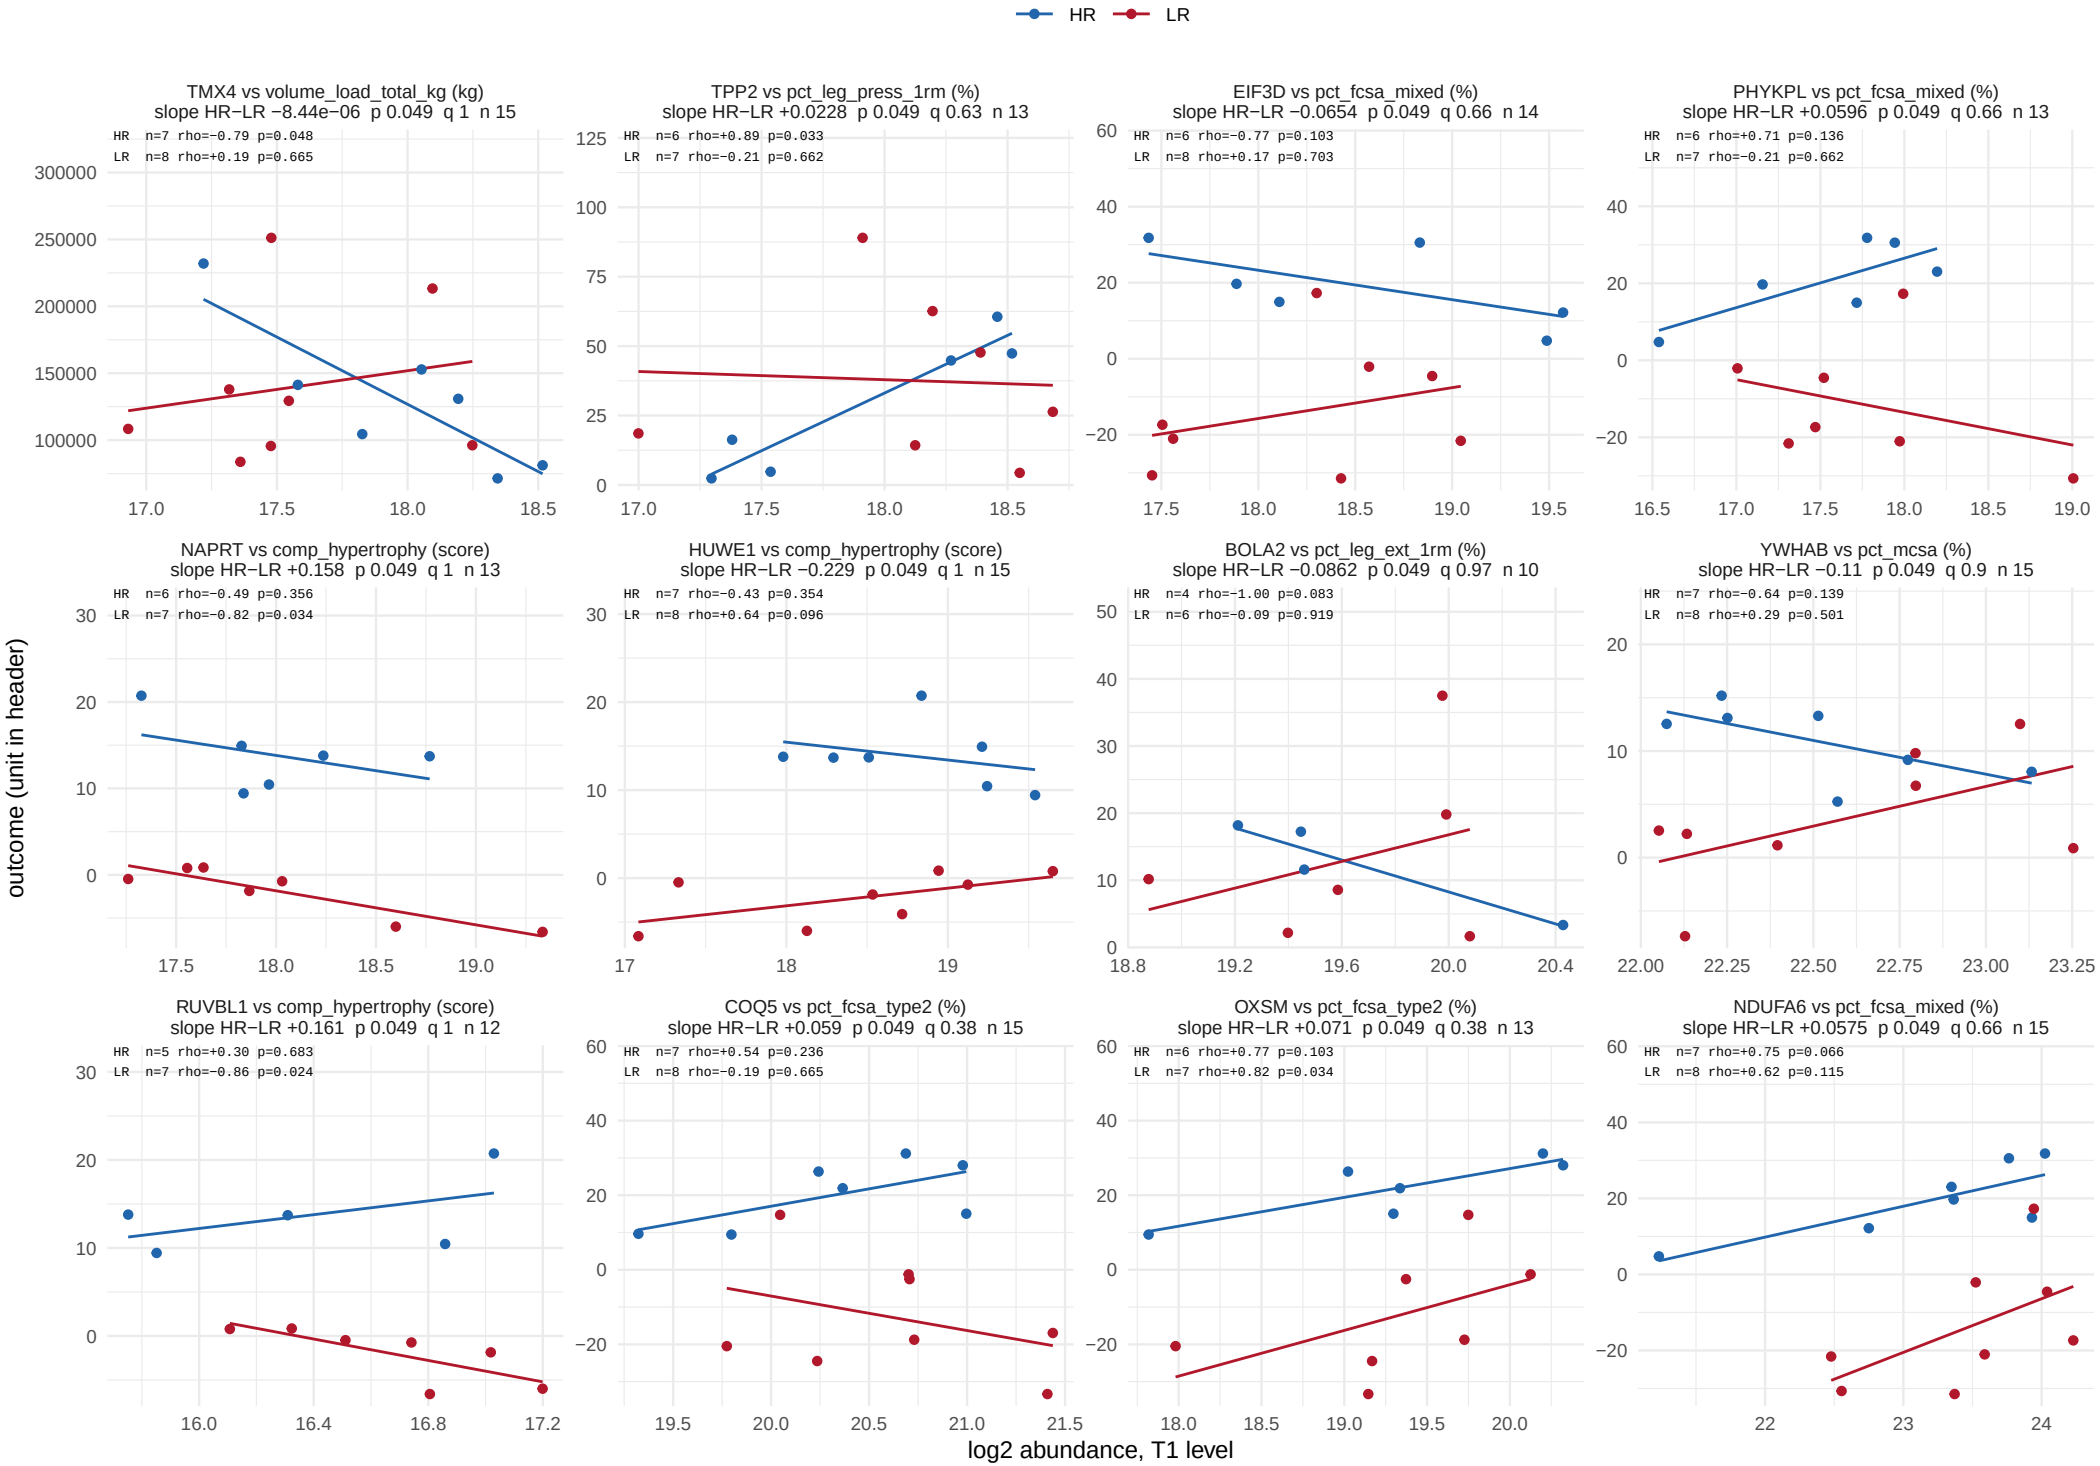

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


721 of 12553 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 60 of 61.

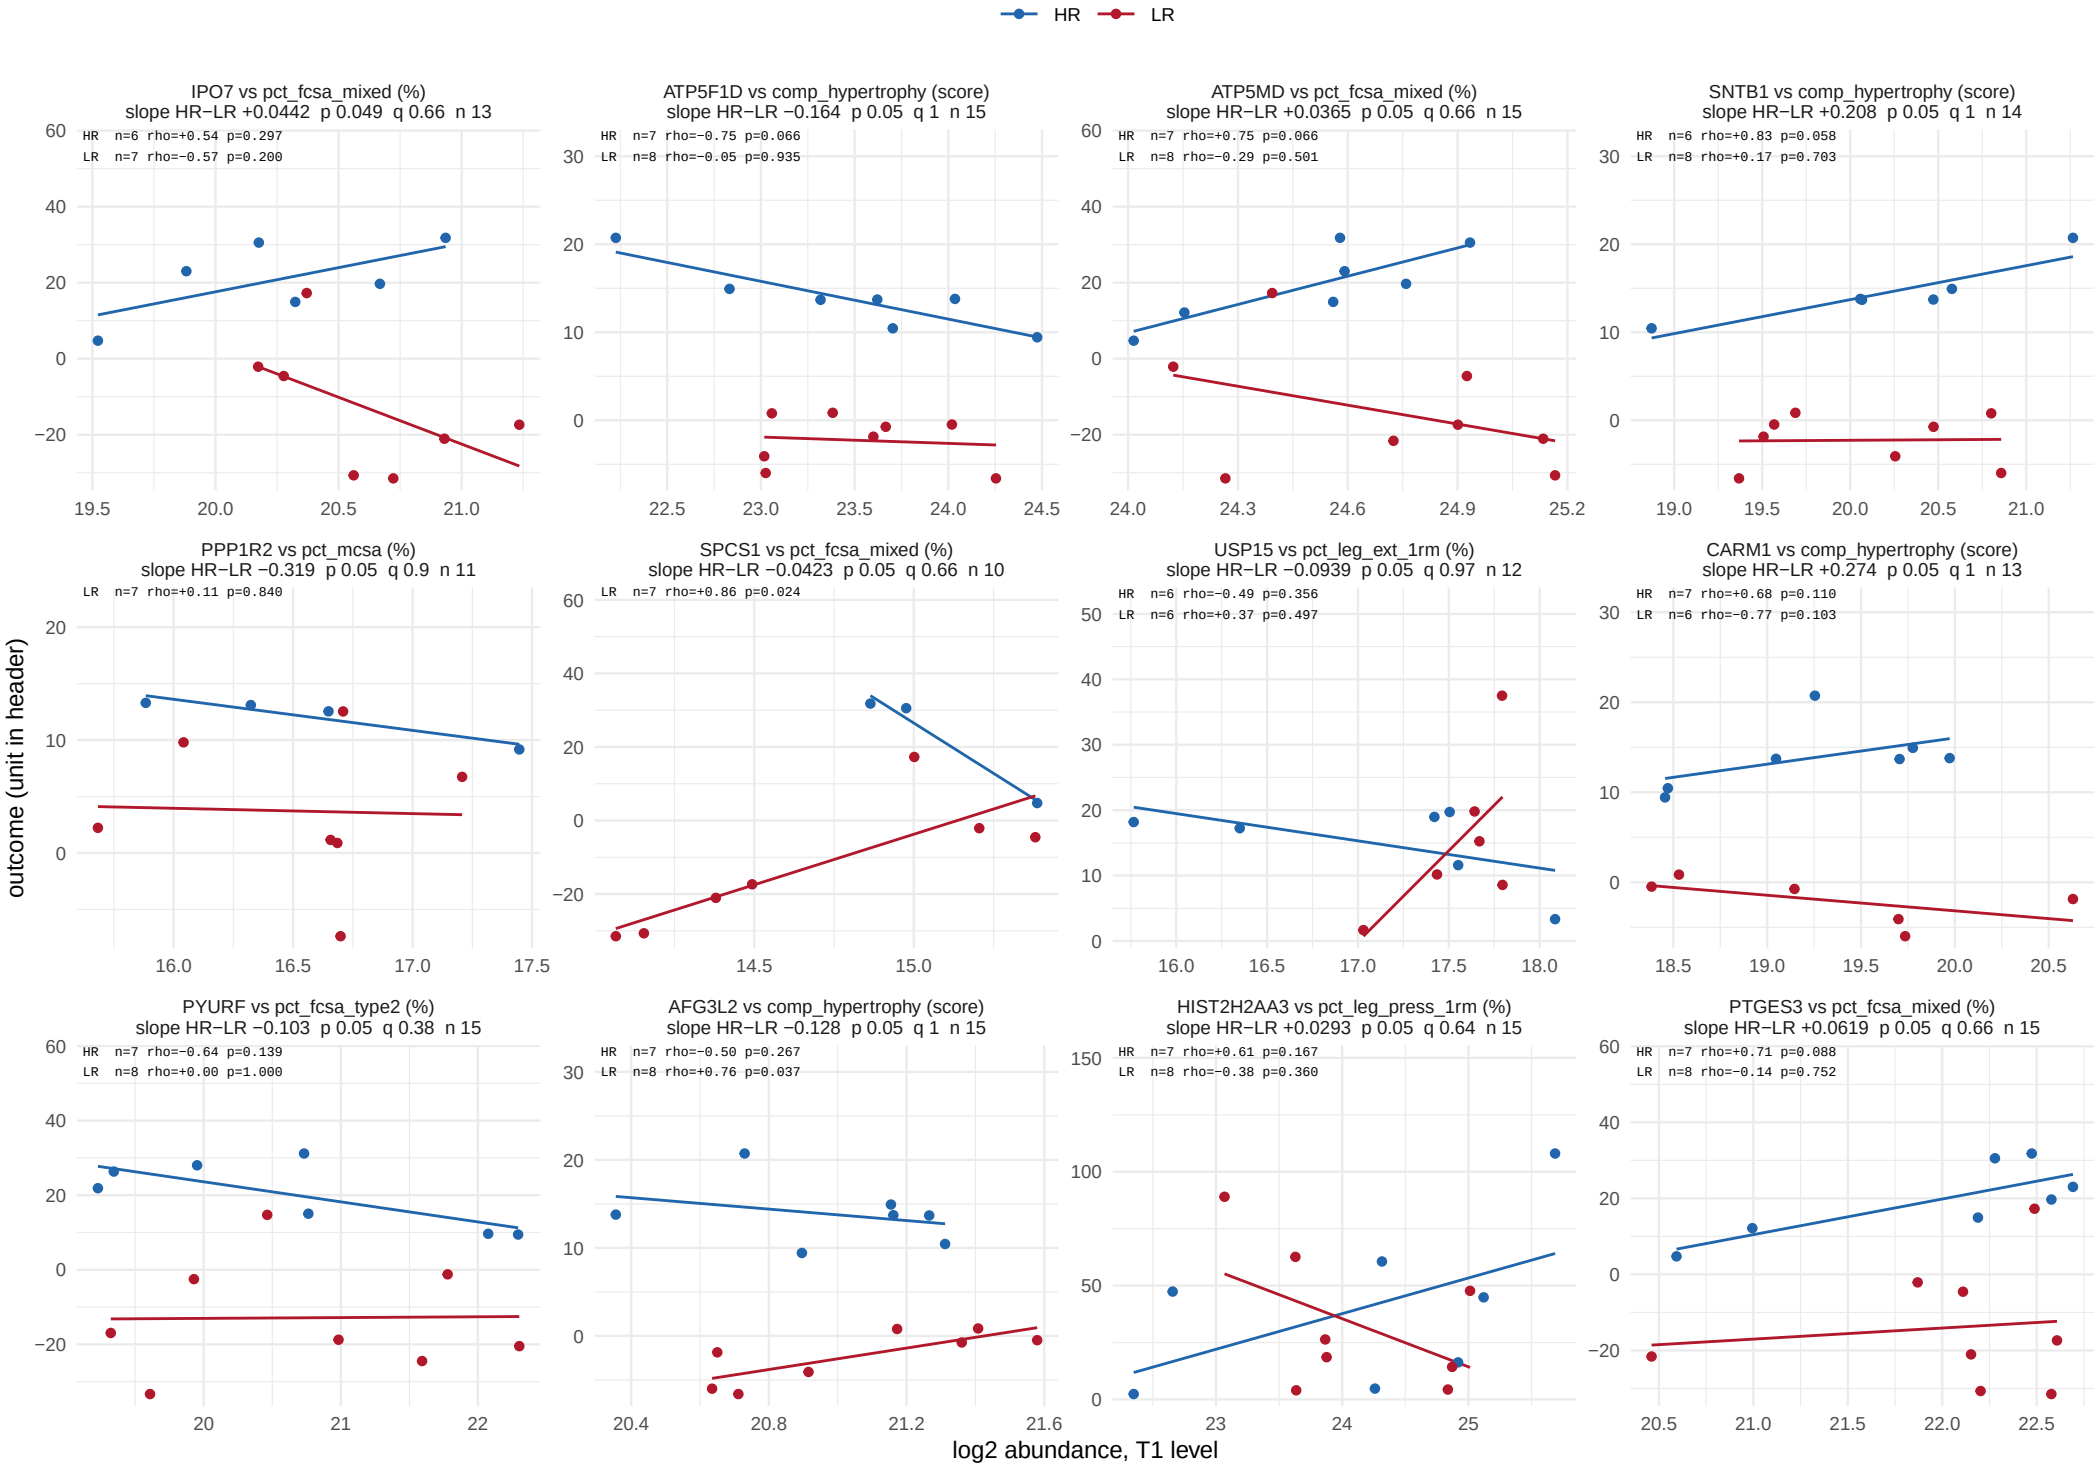

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


721 of 12553 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 61 of 61.

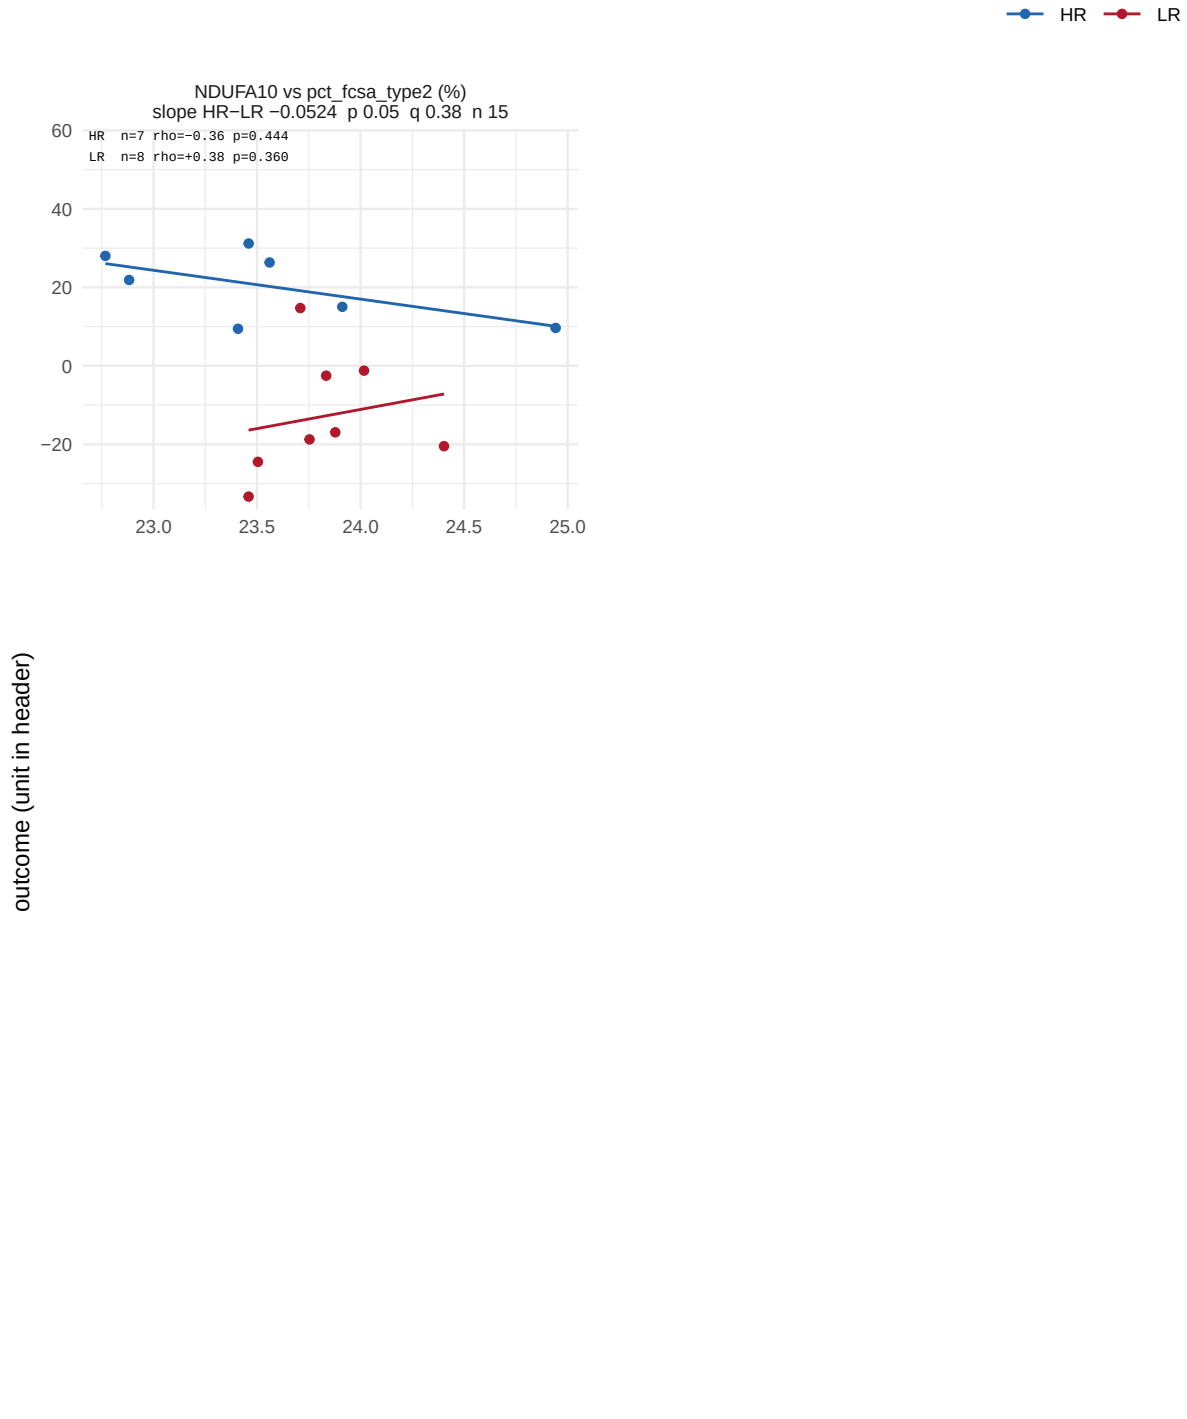

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


670 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 1 of 56.

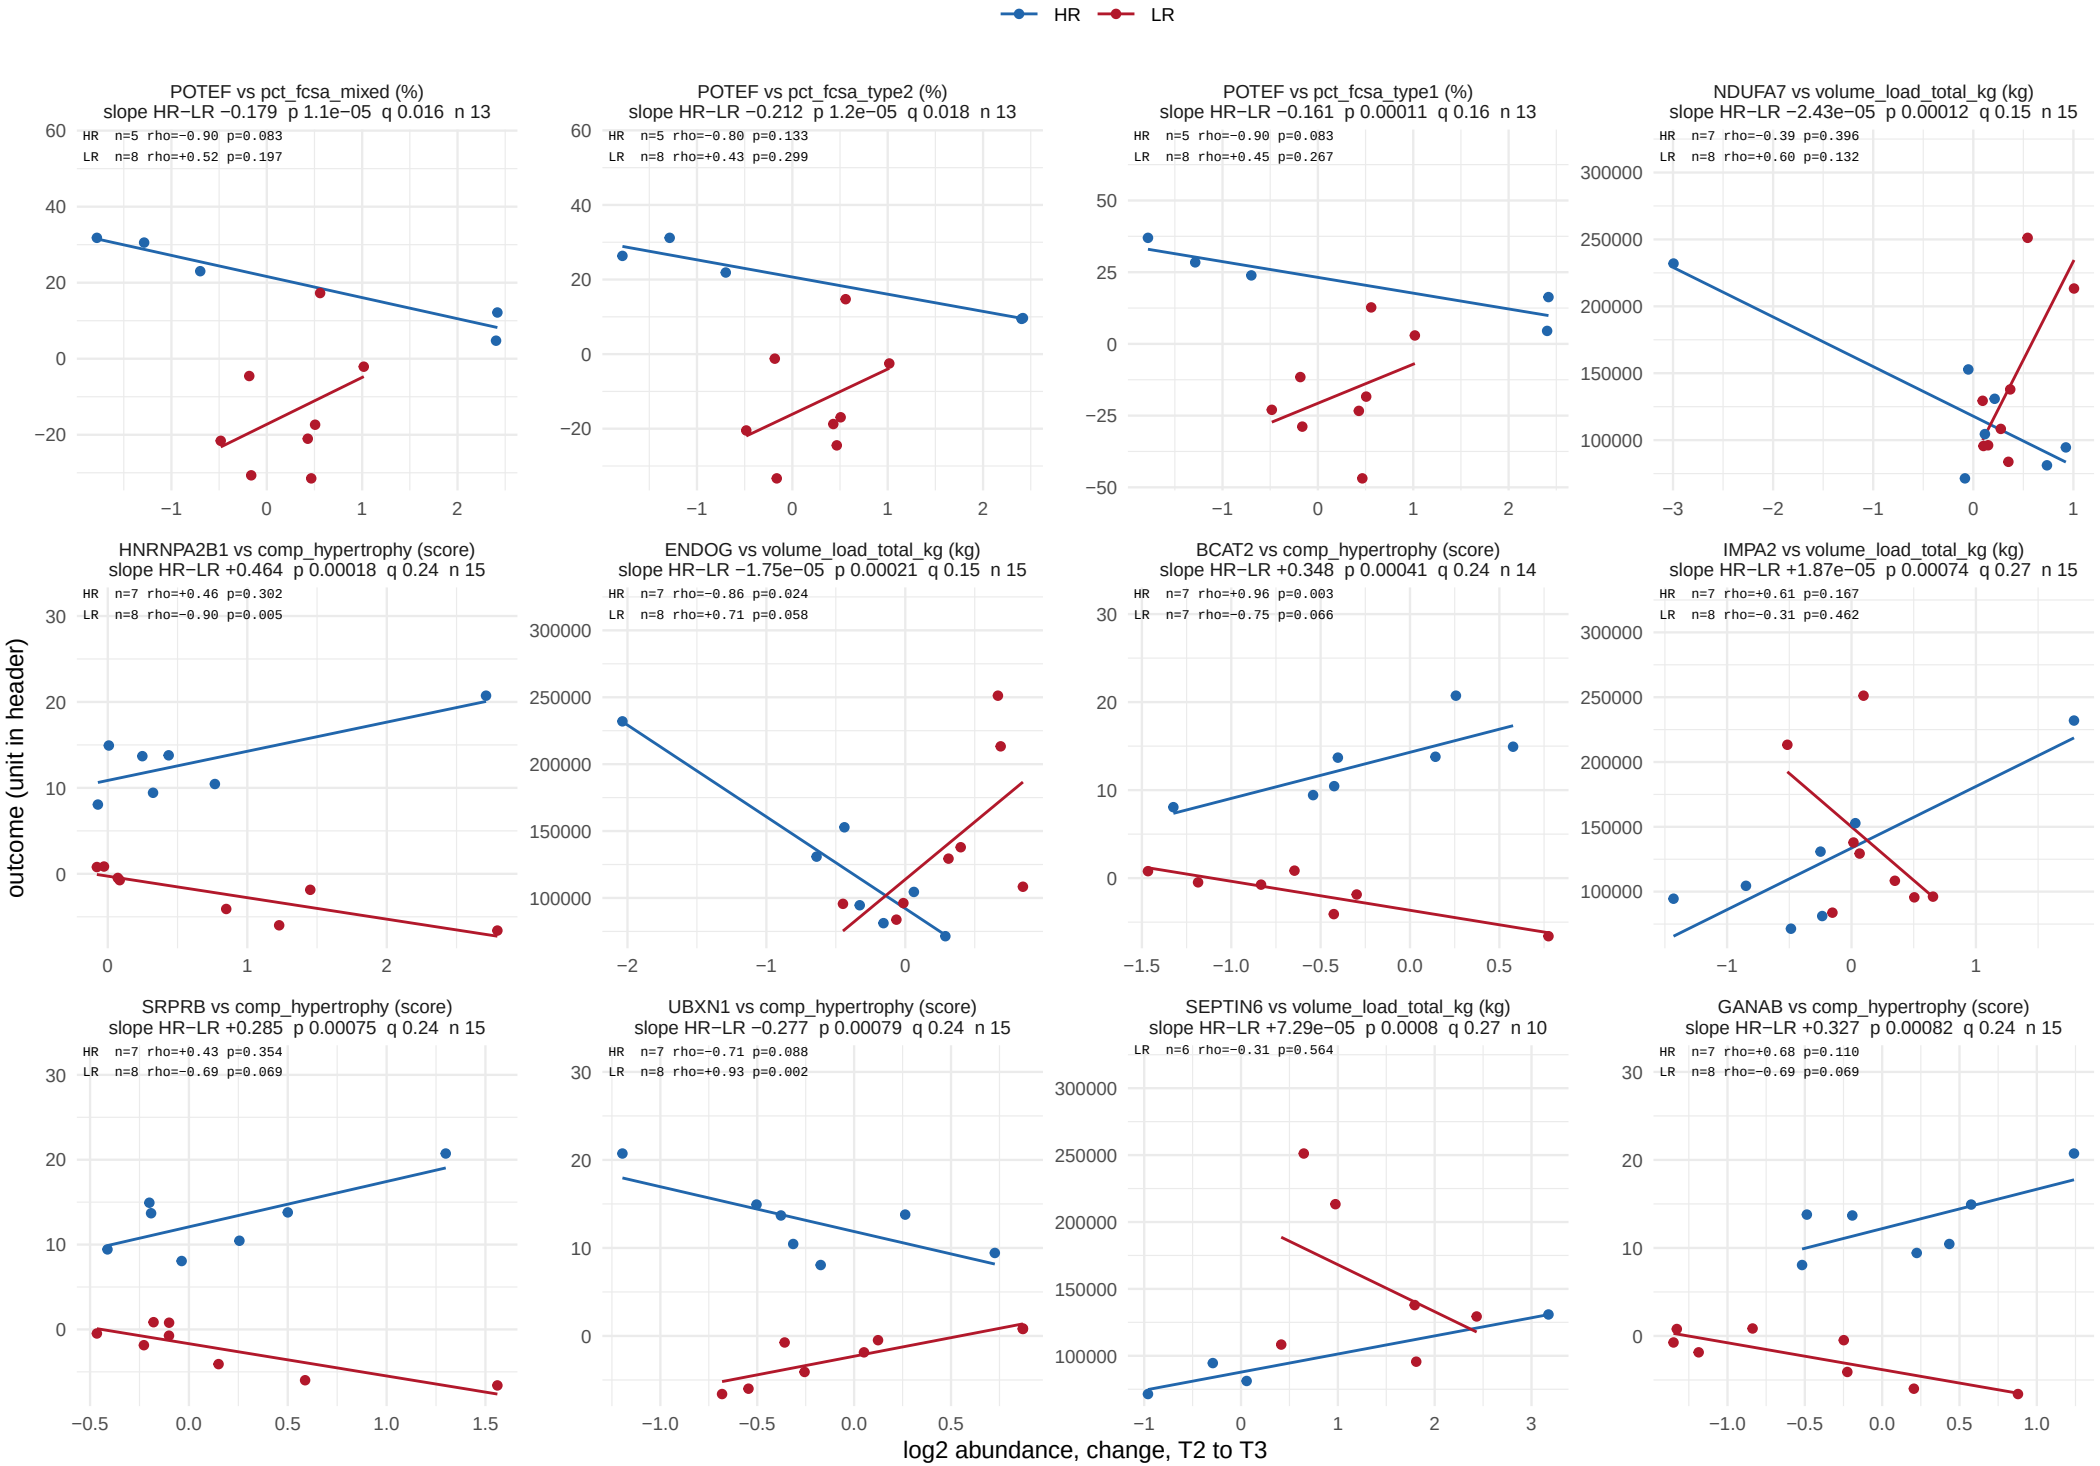

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


670 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 2 of 56.

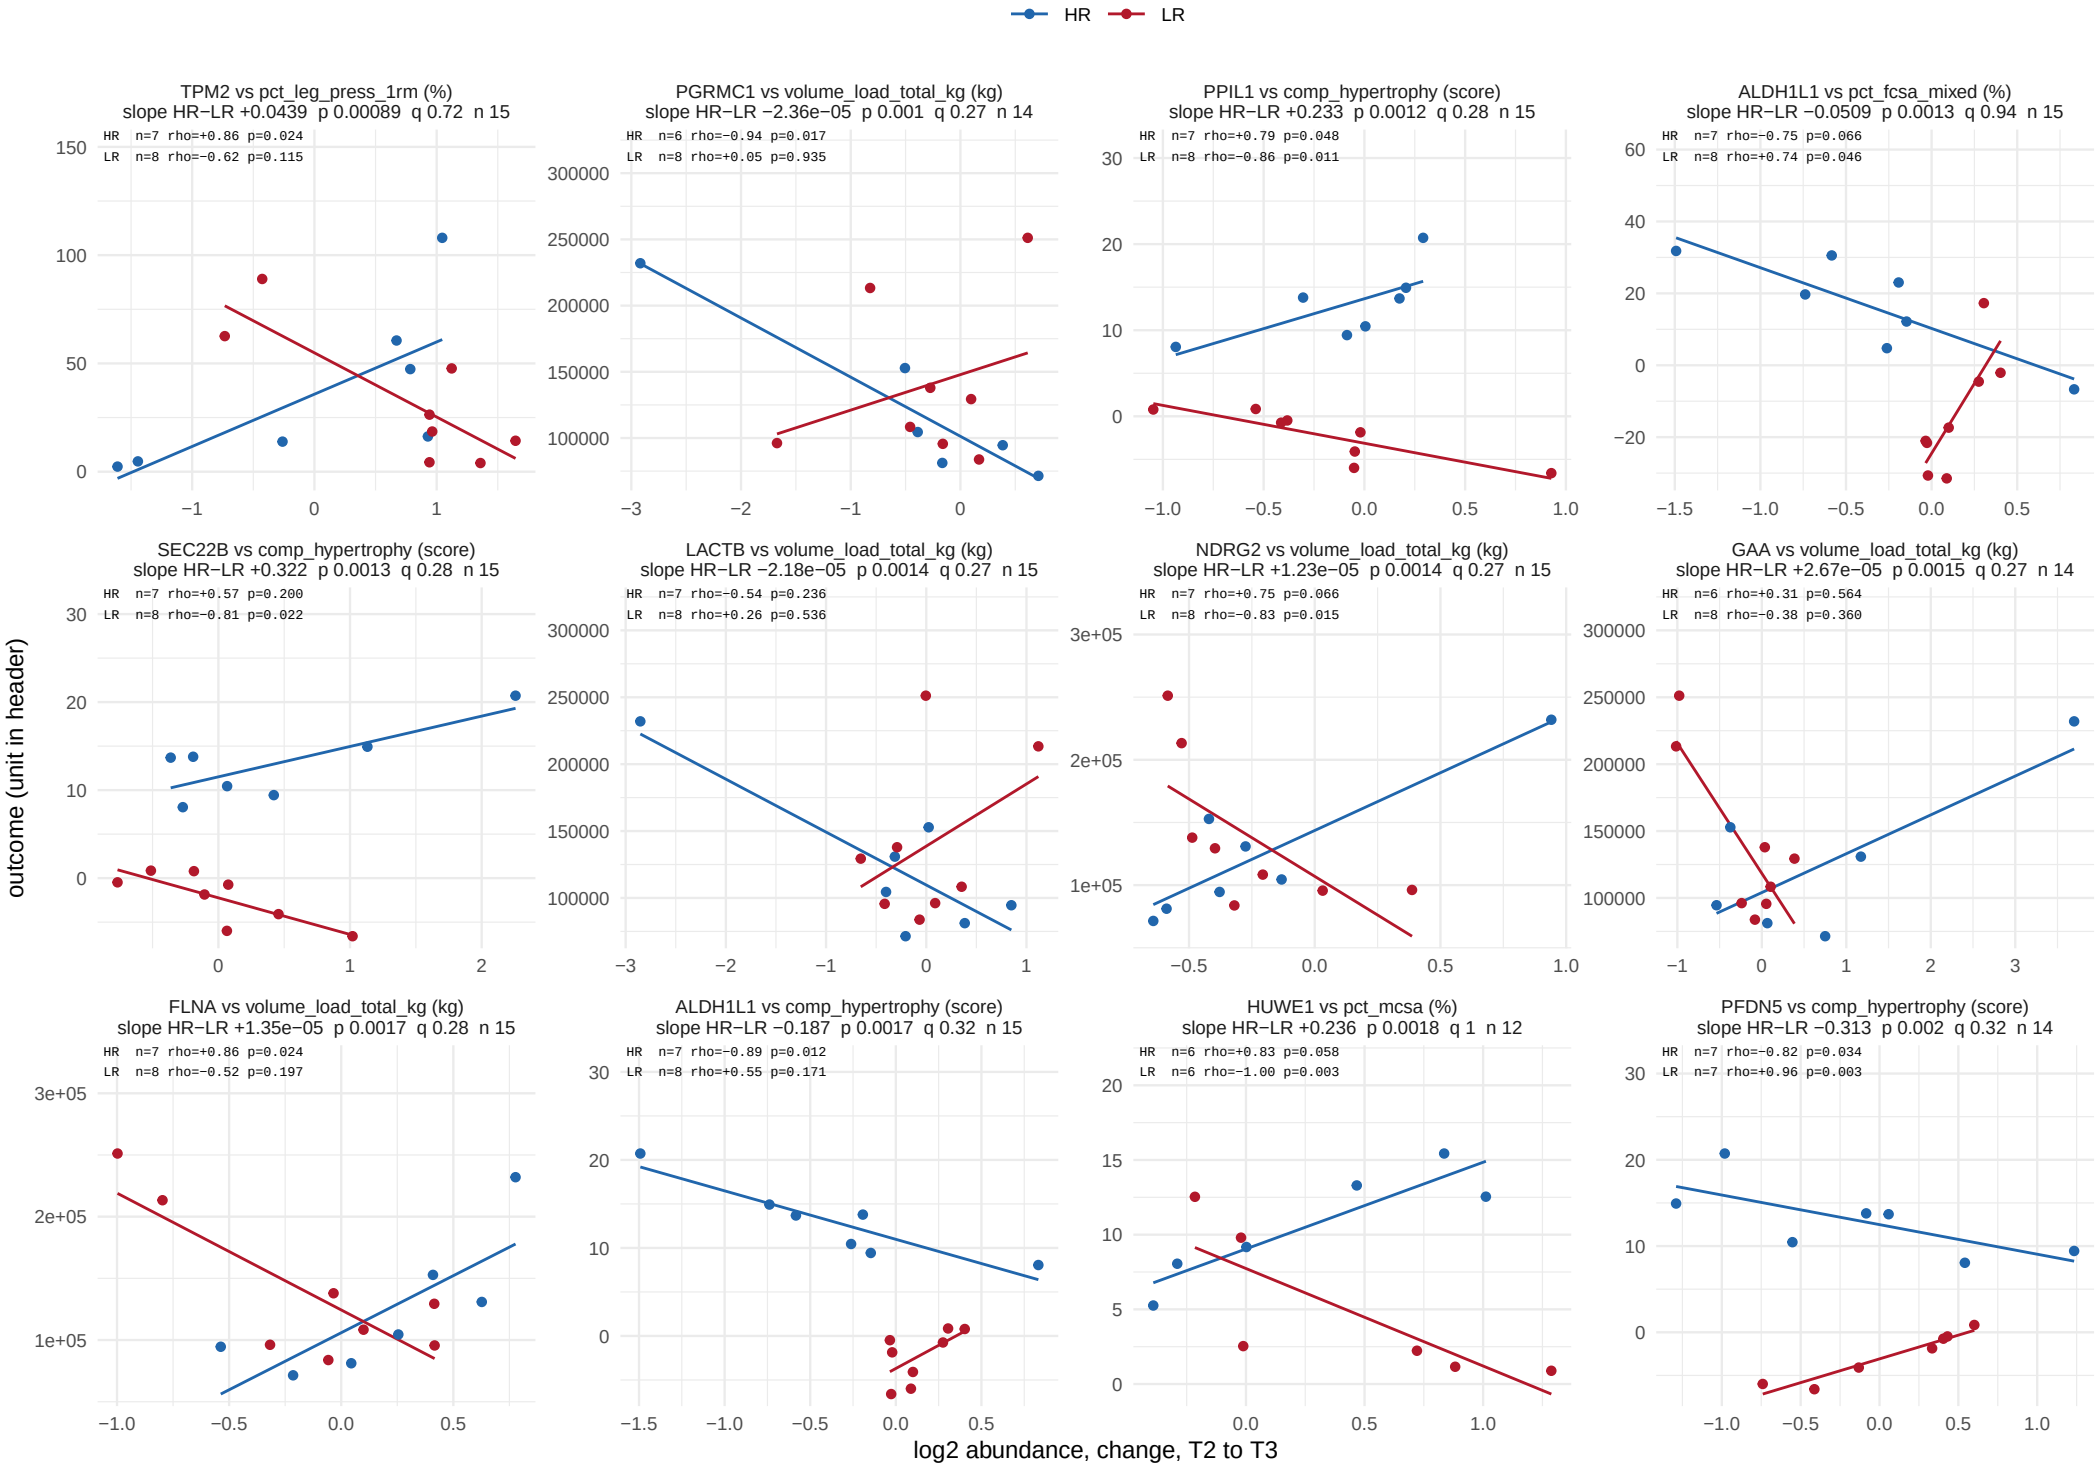

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


670 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 3 of 56.

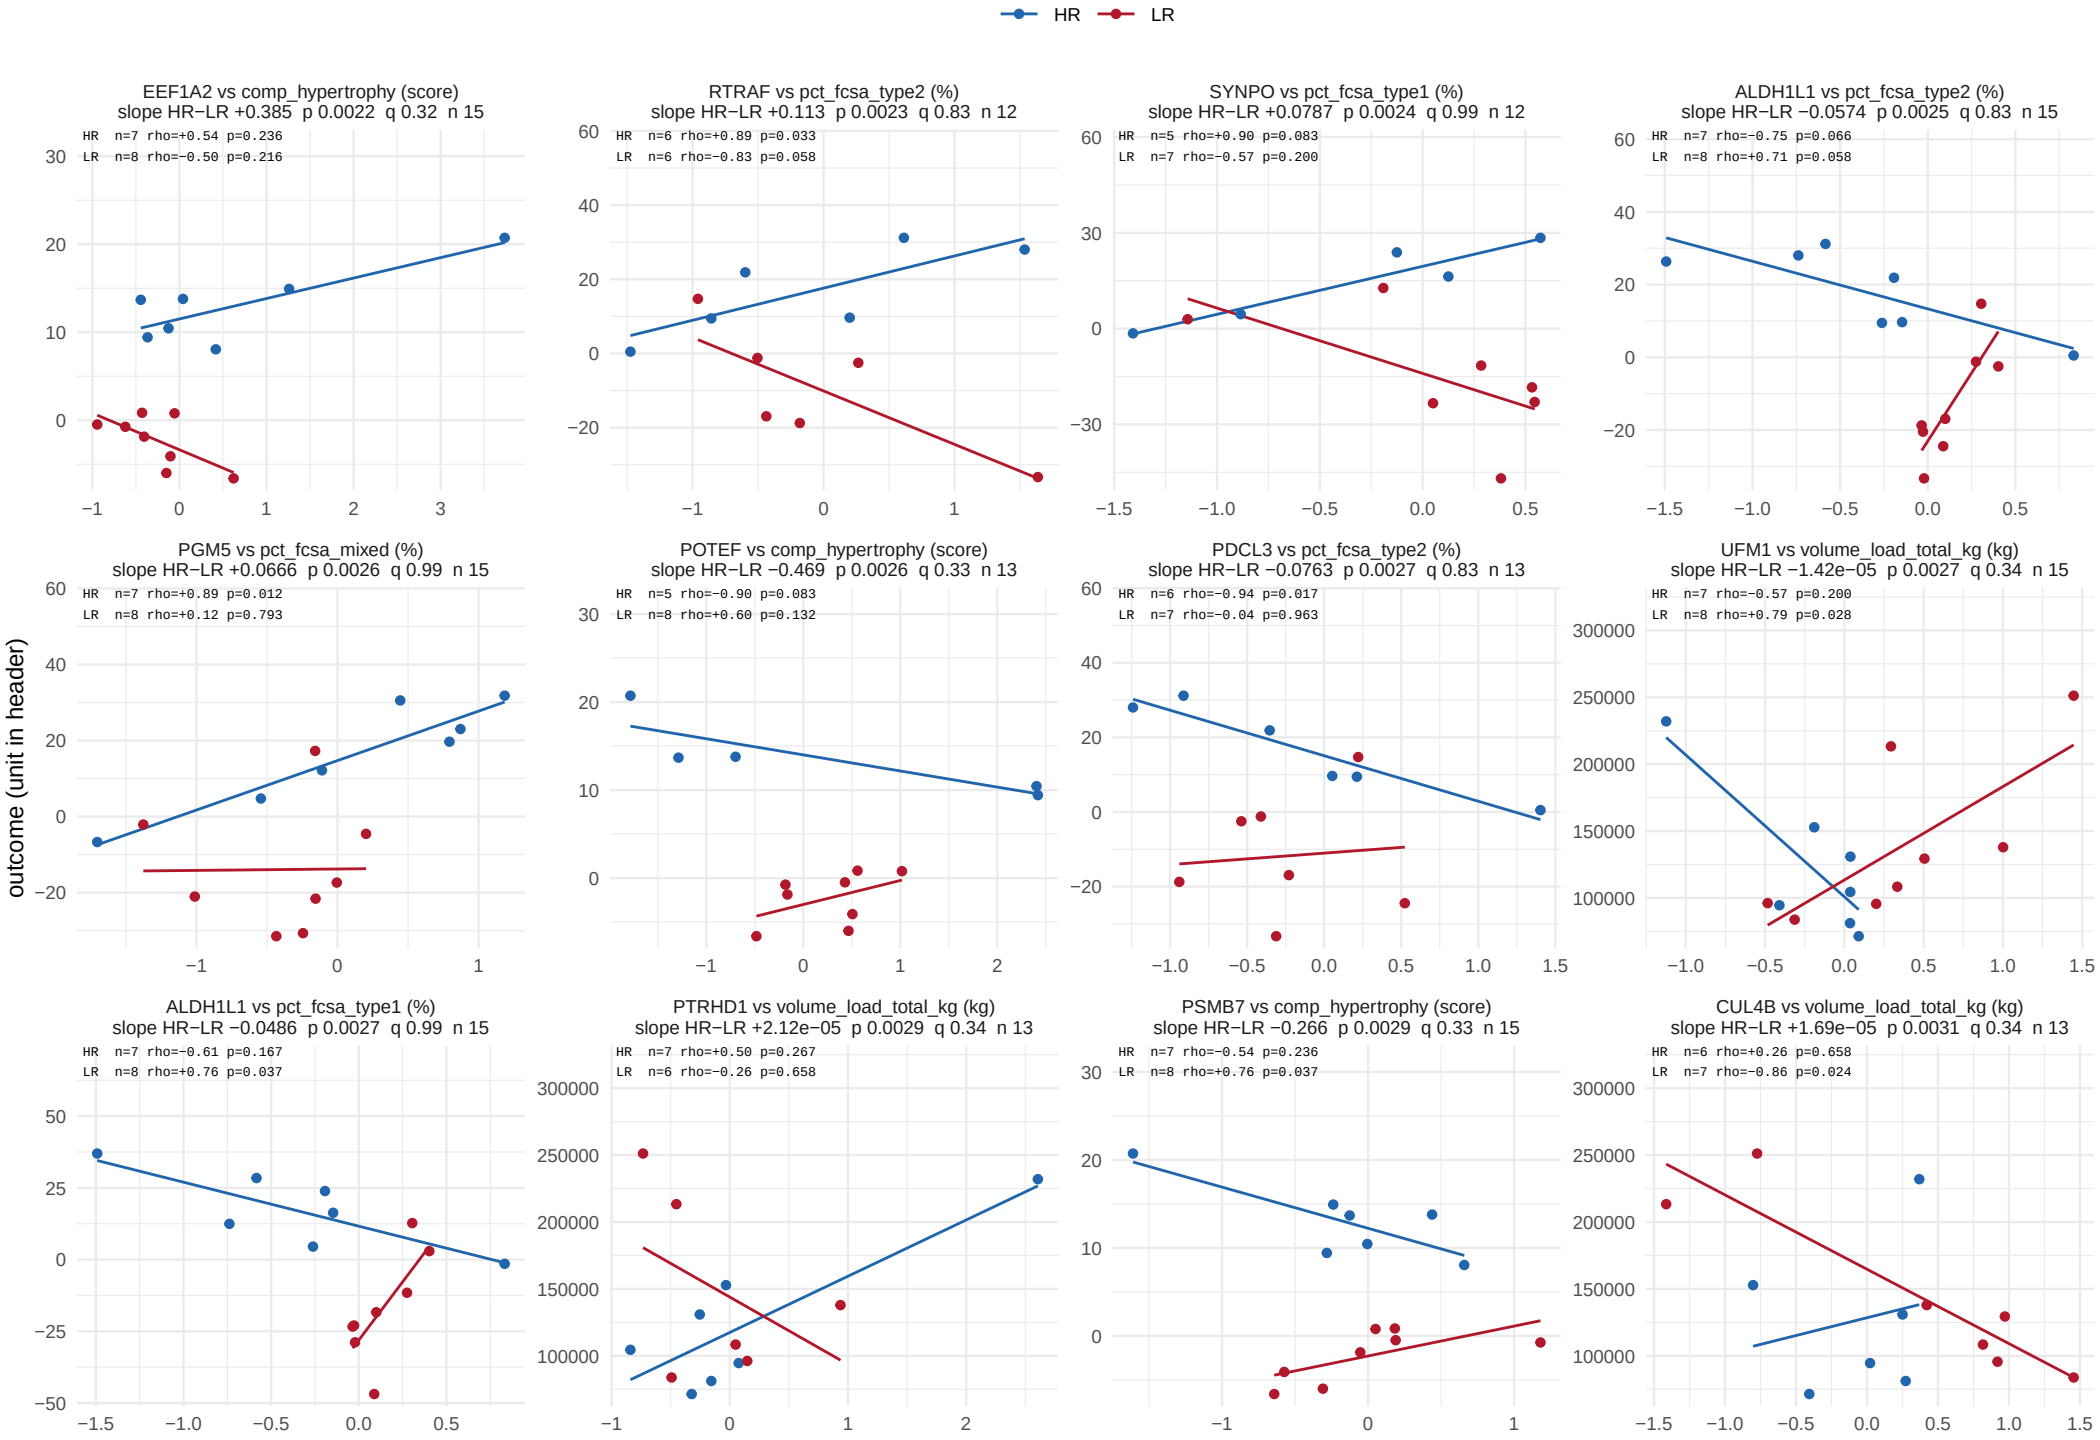

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


670 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 4 of 56.

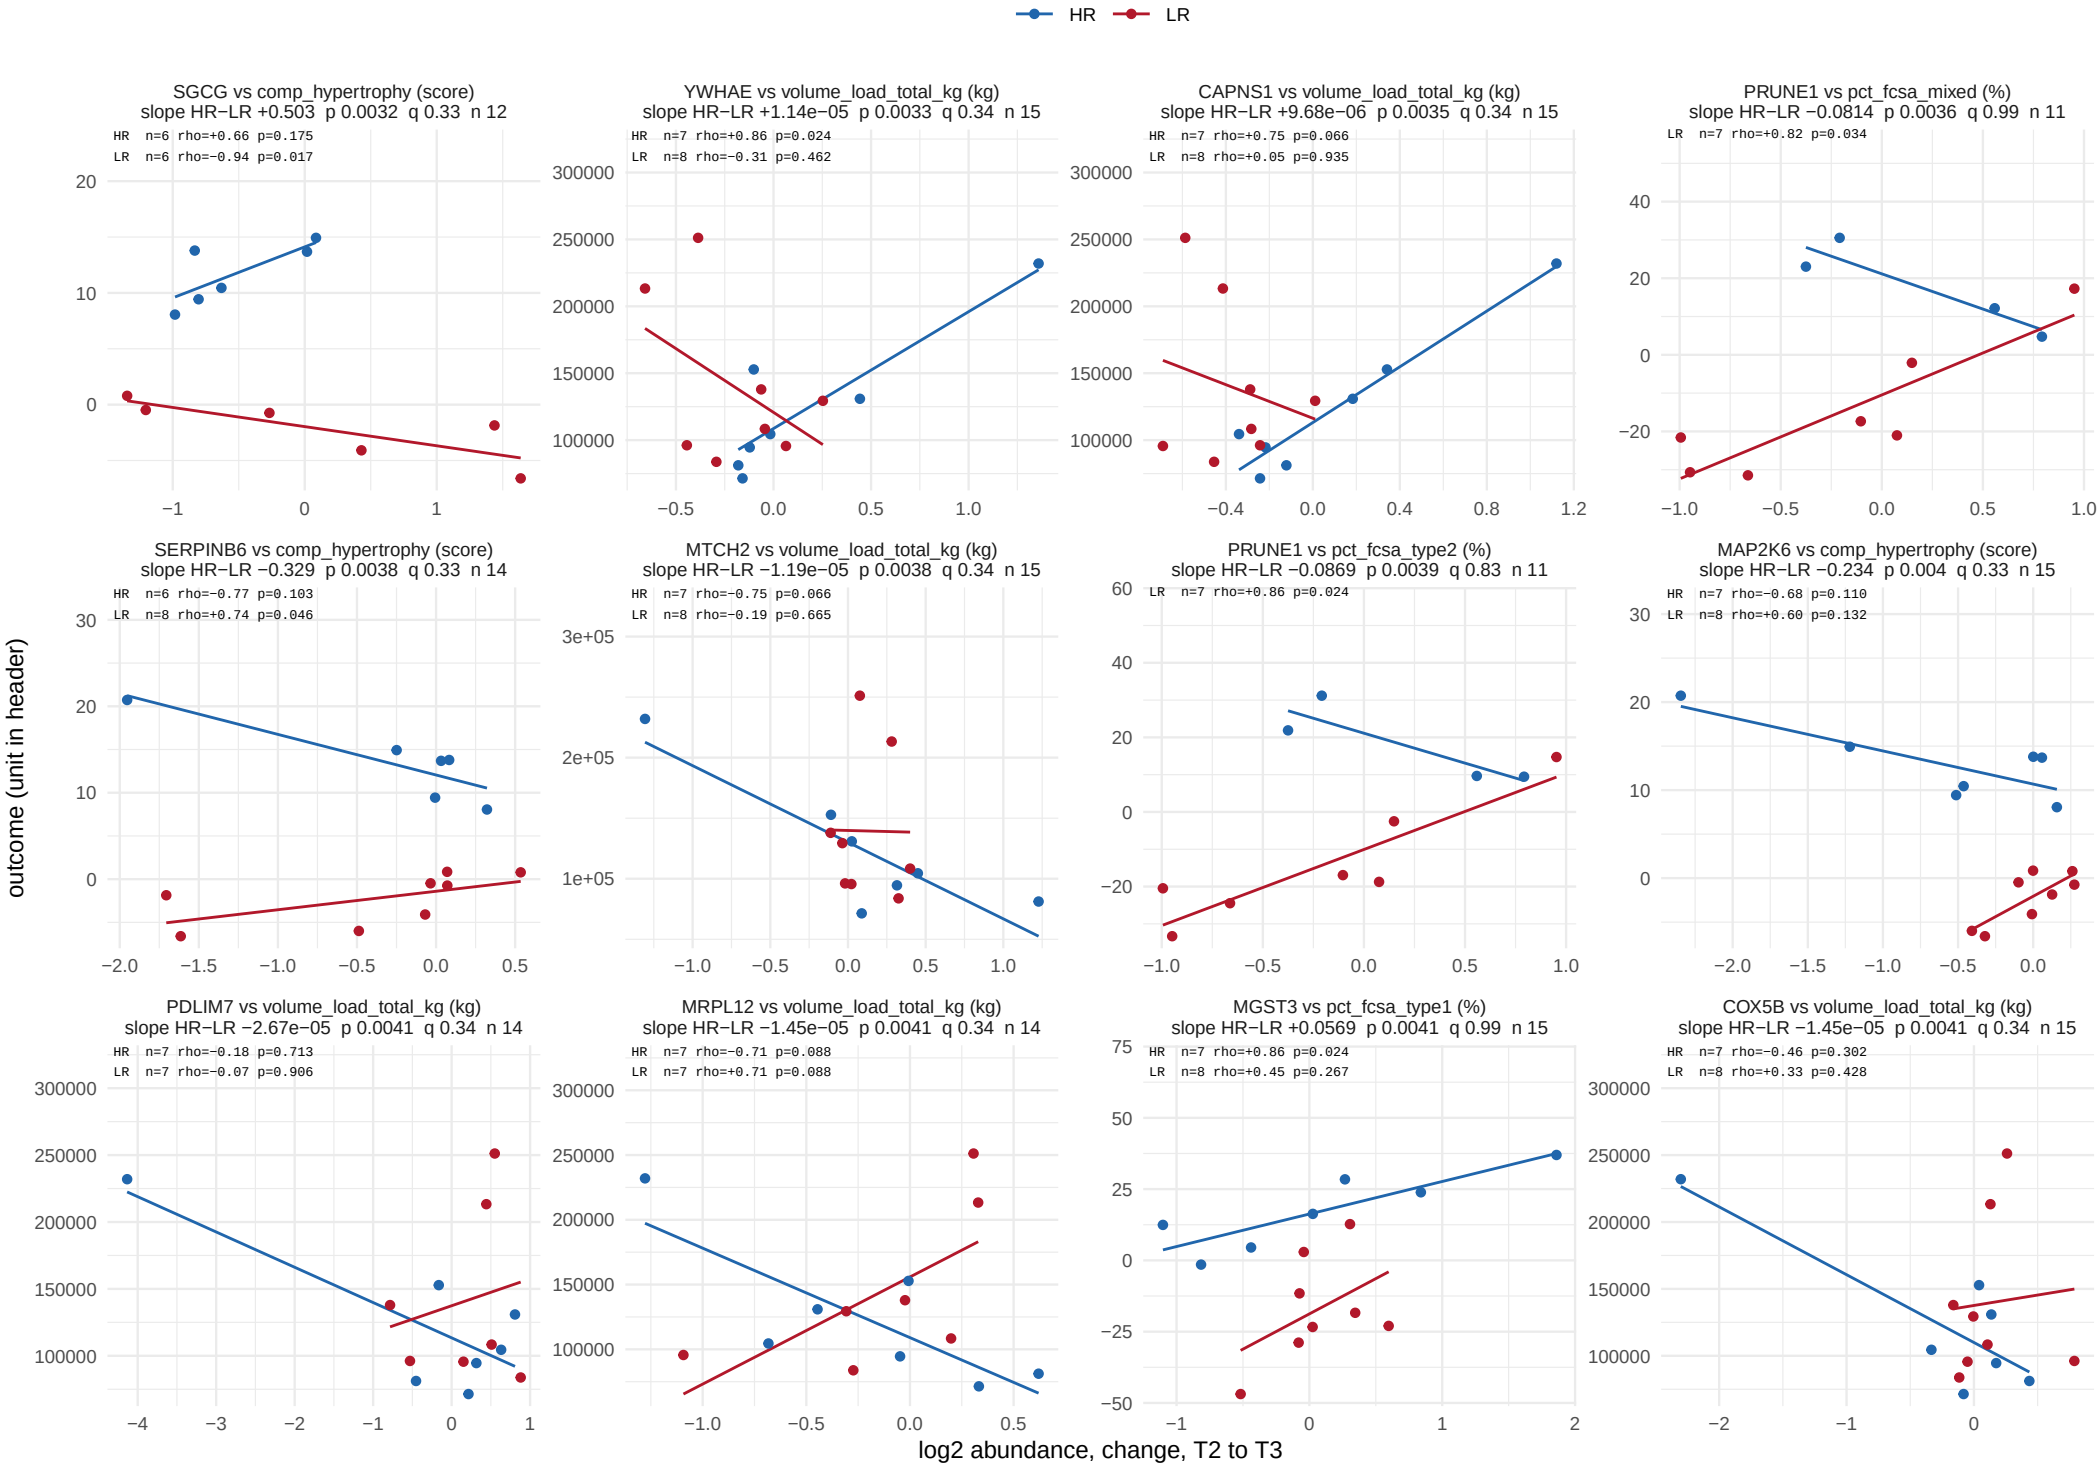

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


670 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 5 of 56.

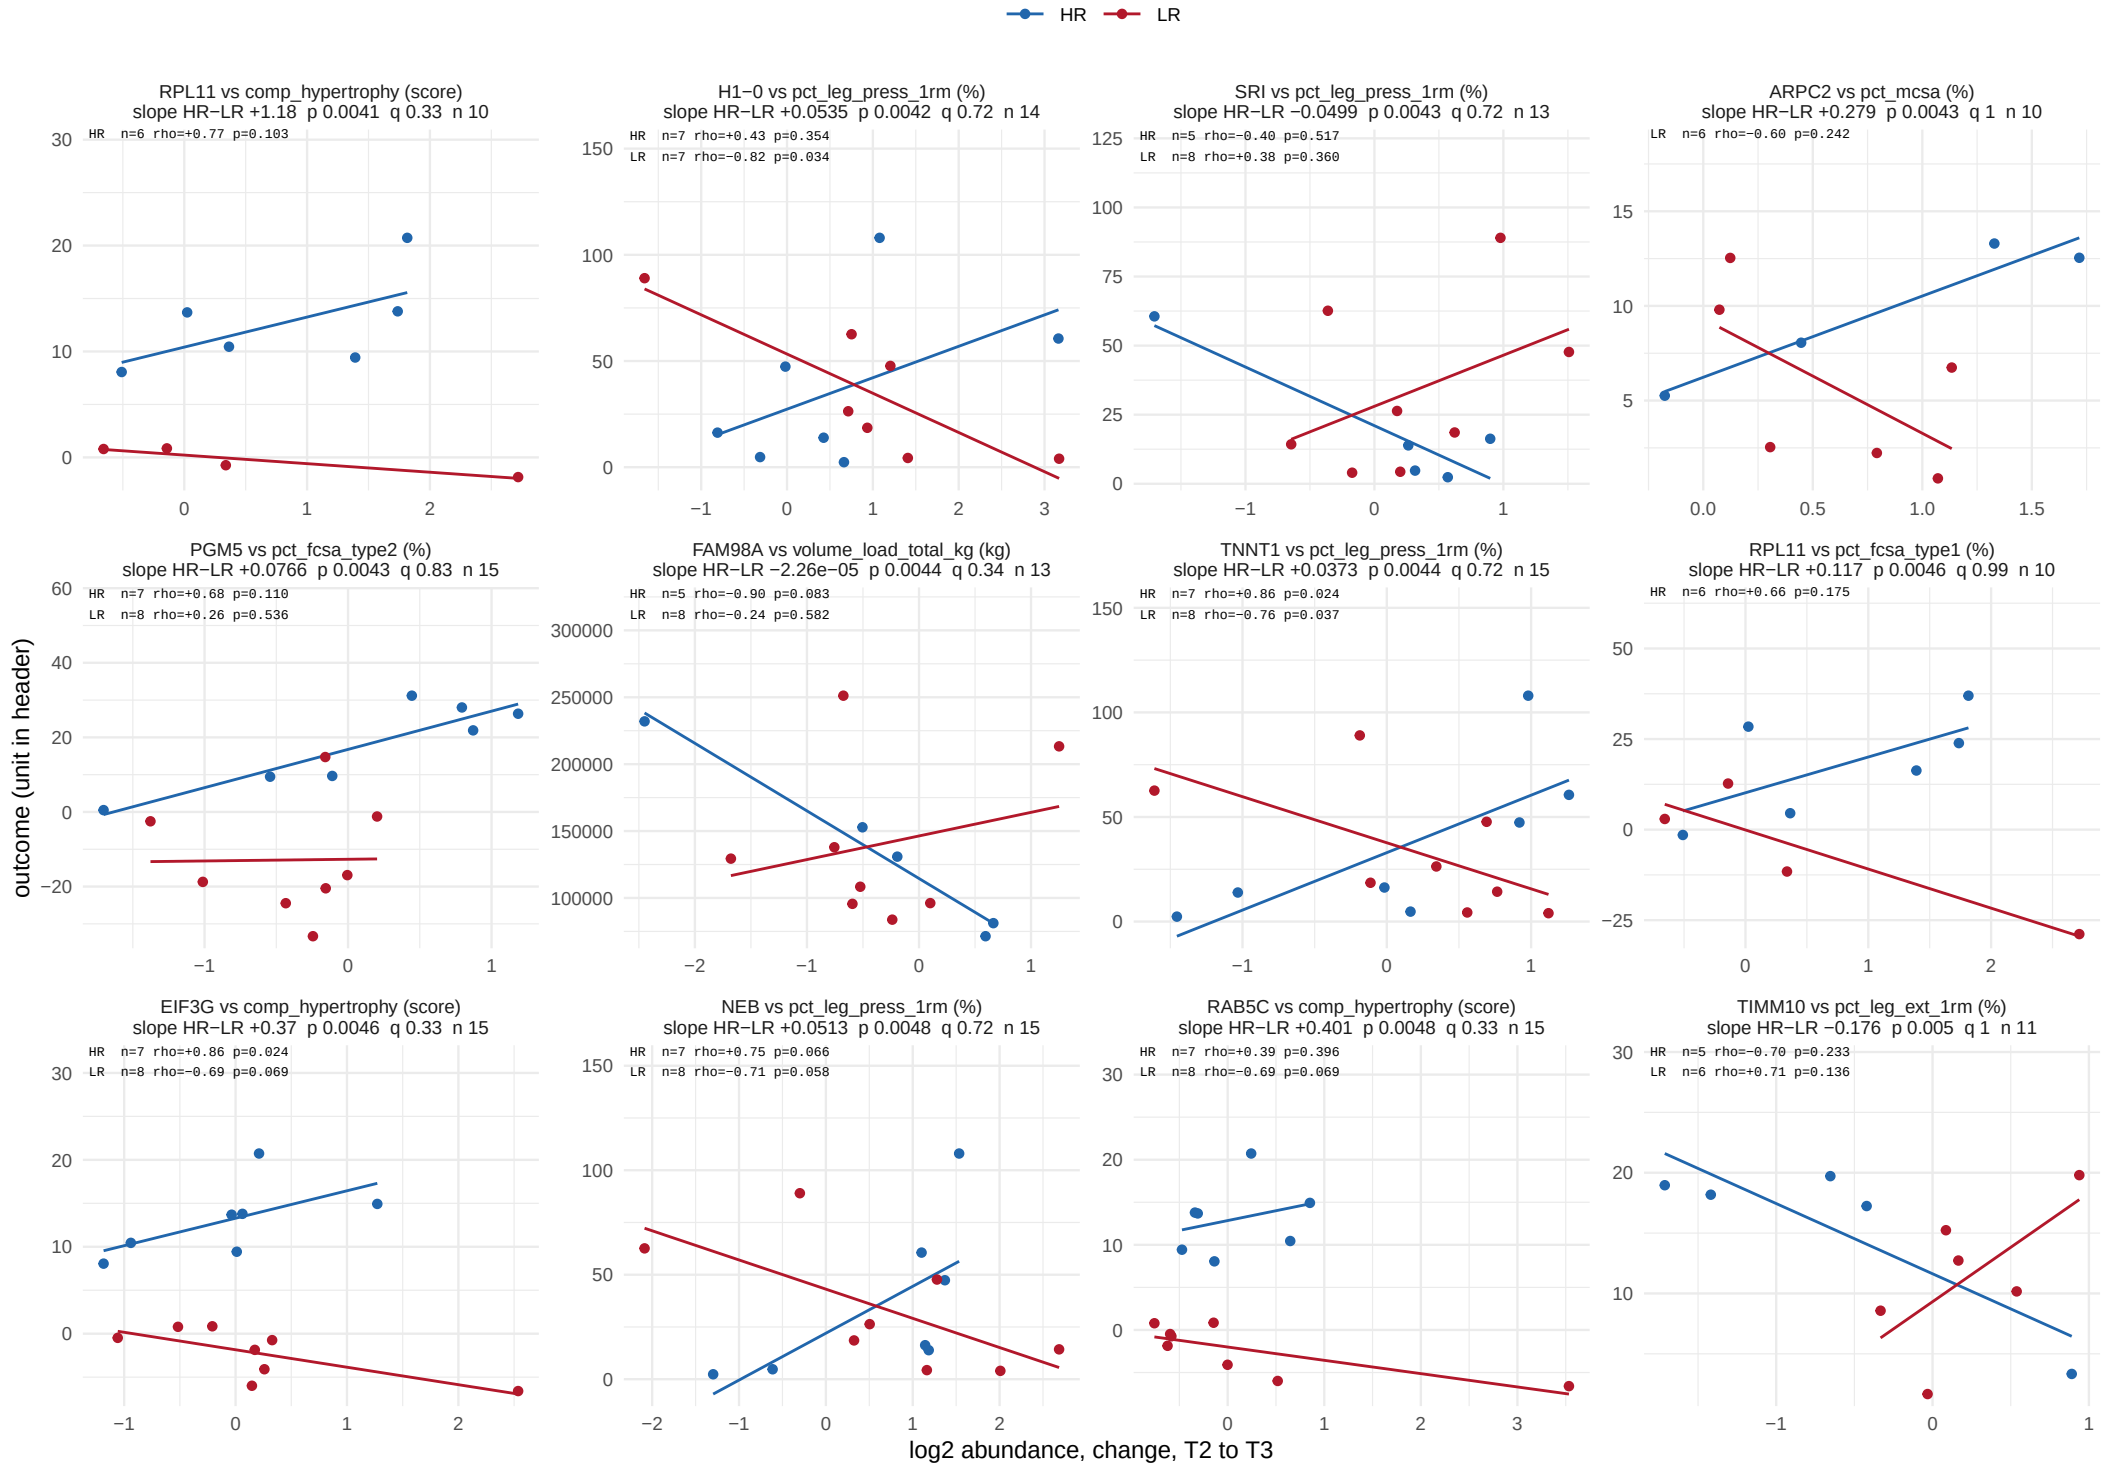

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


670 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 6 of 56.

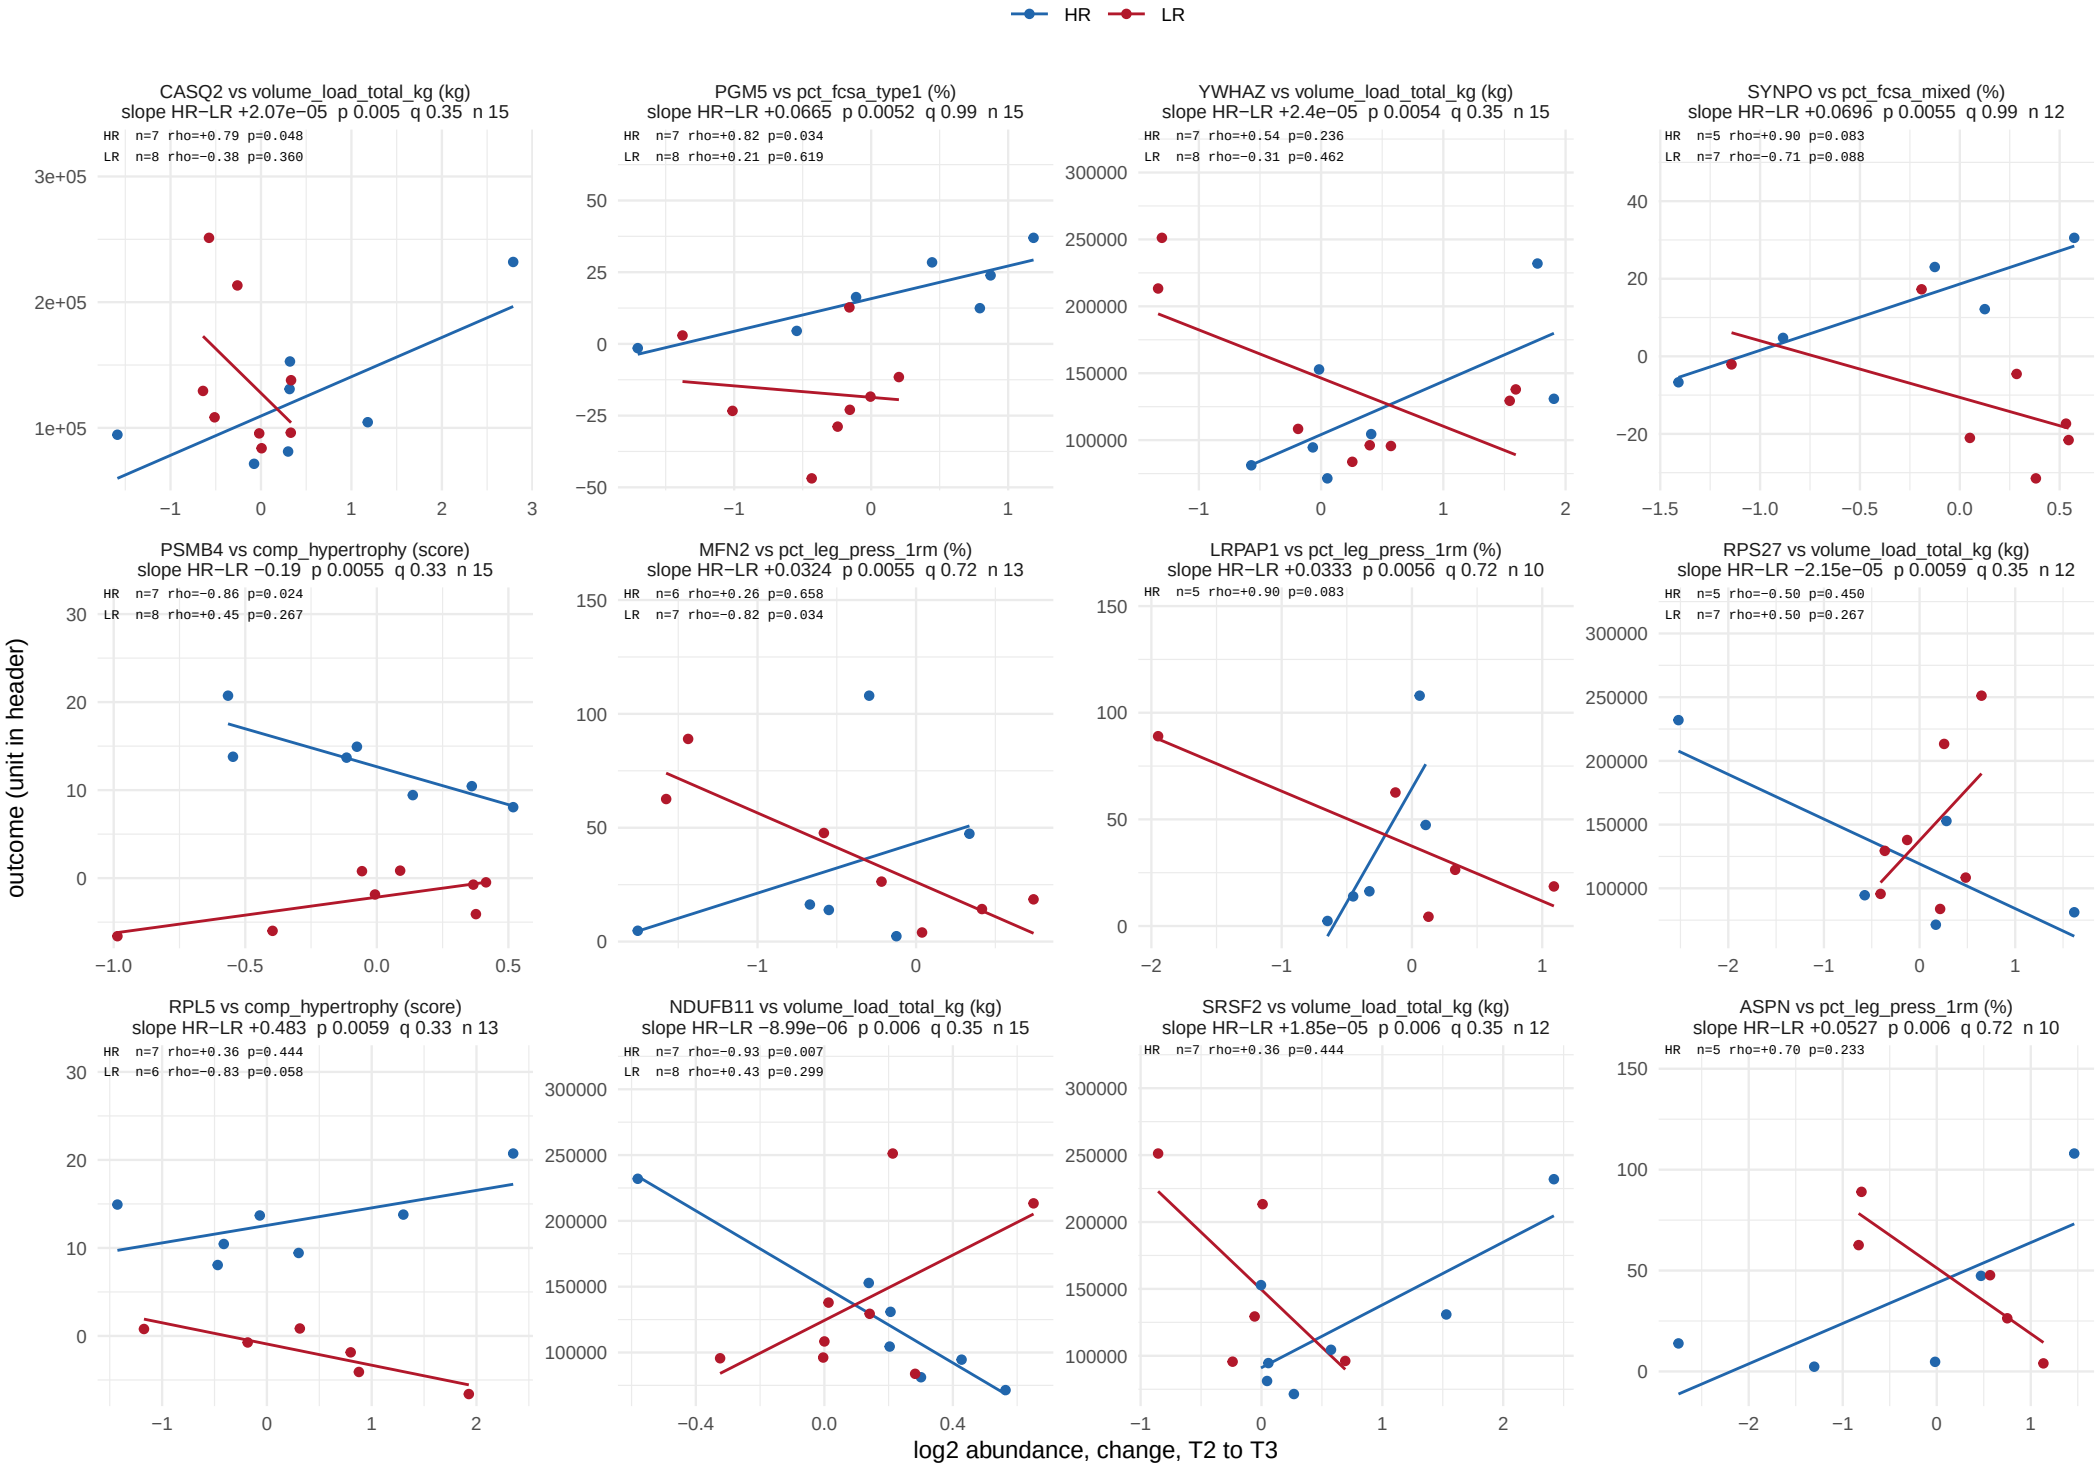

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


670 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 7 of 56.

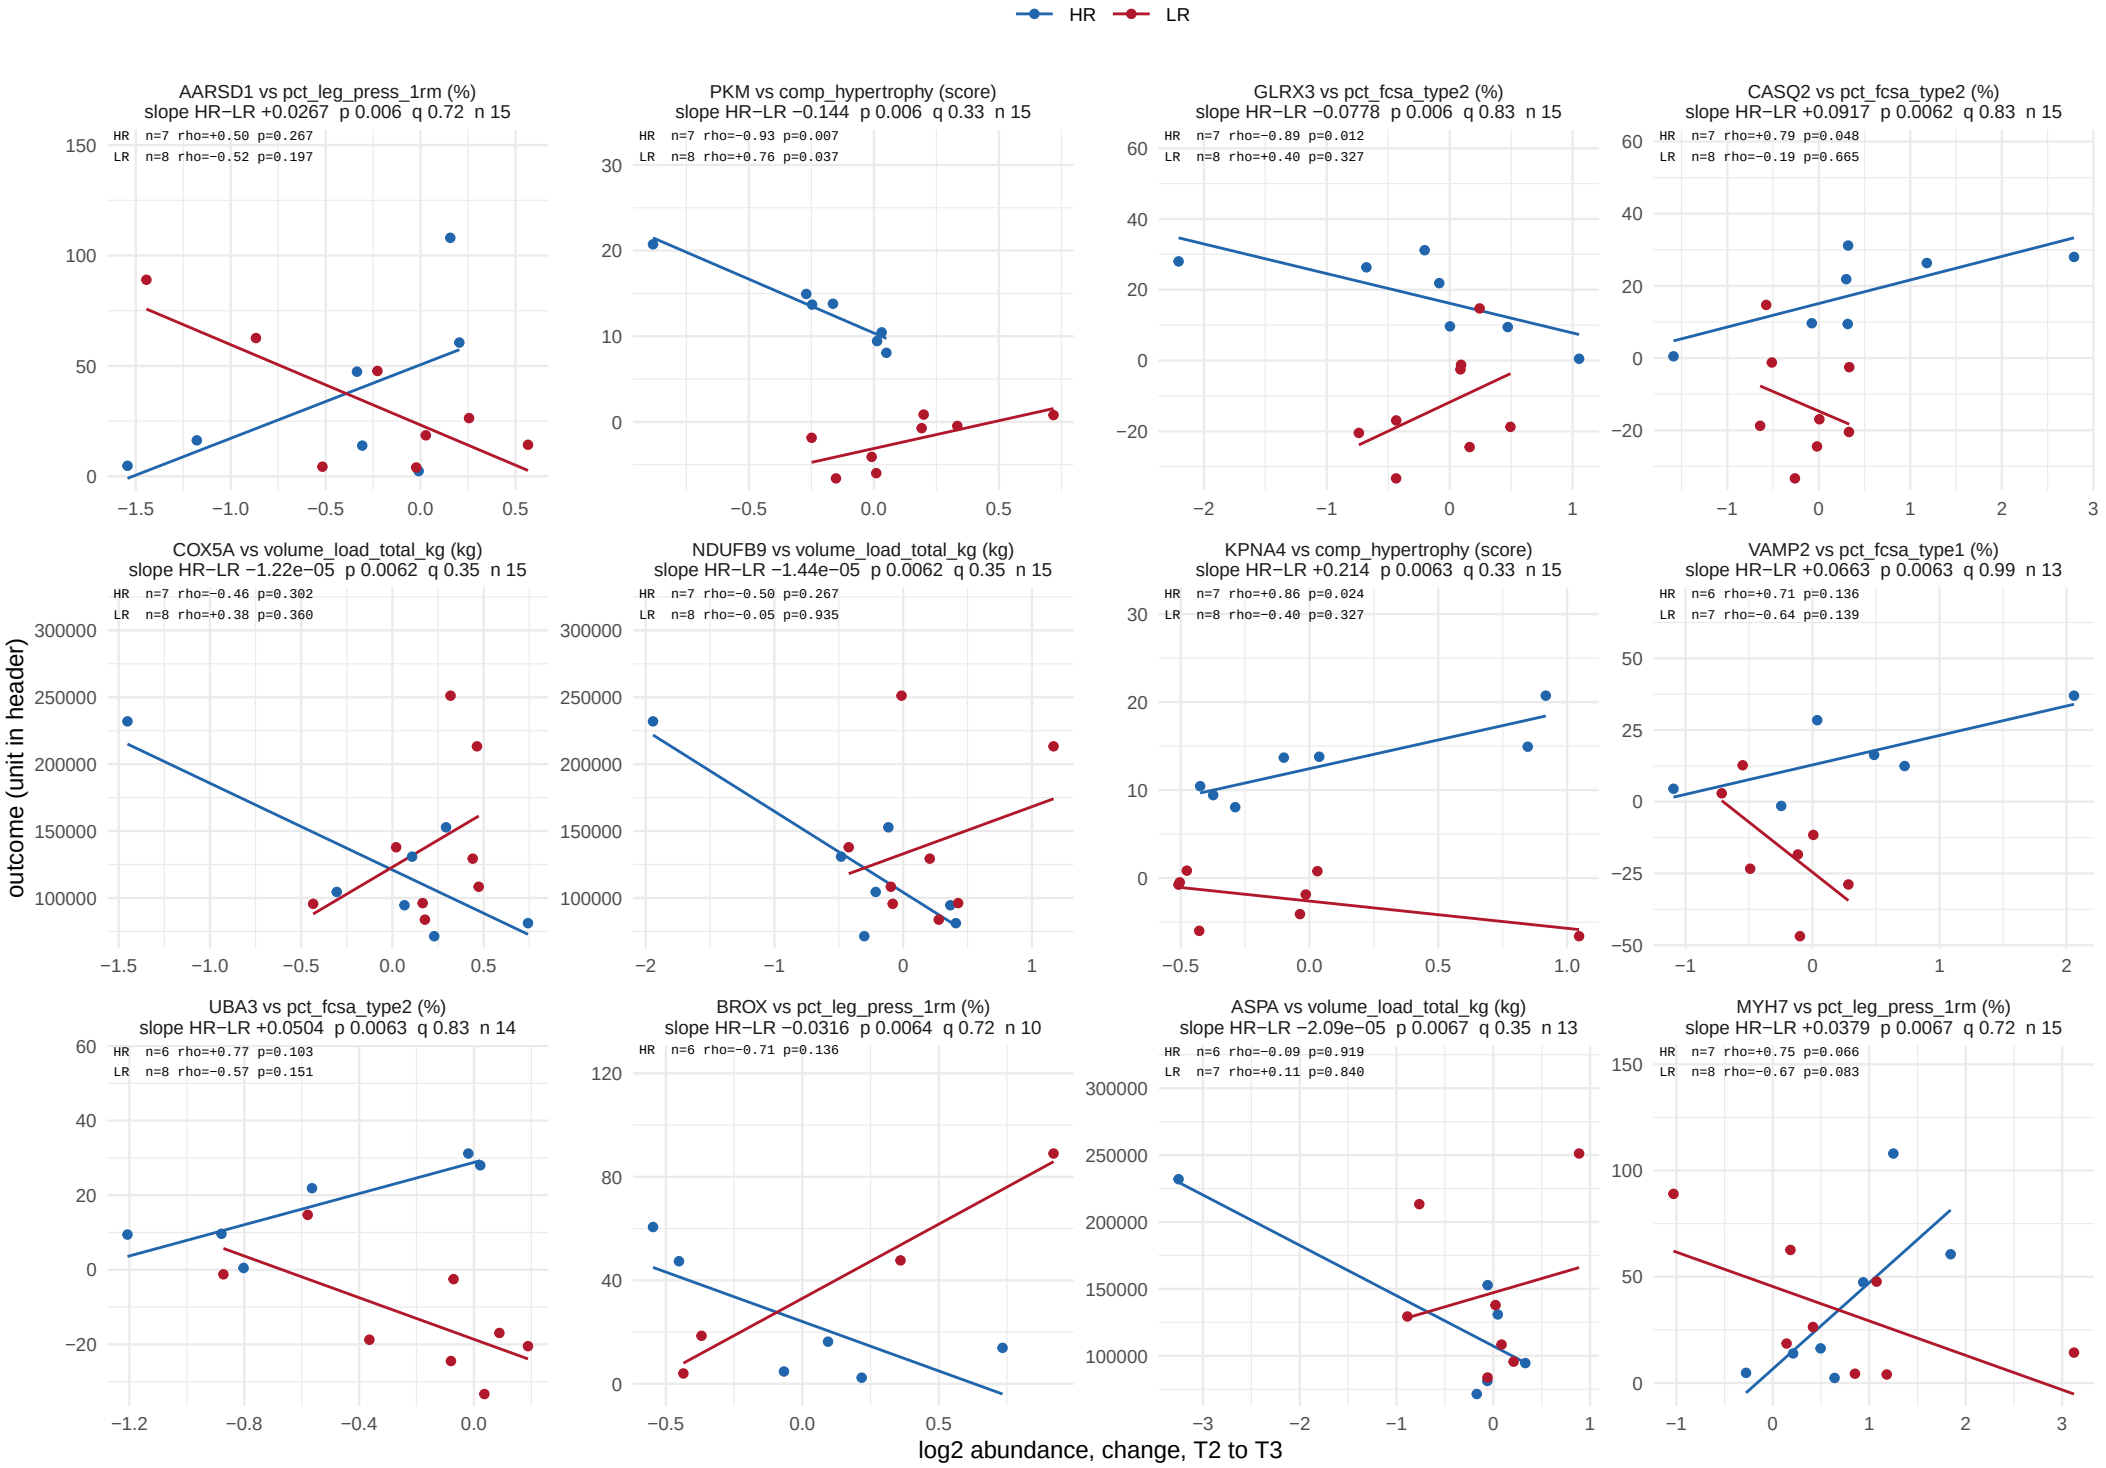

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


670 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 8 of 56.

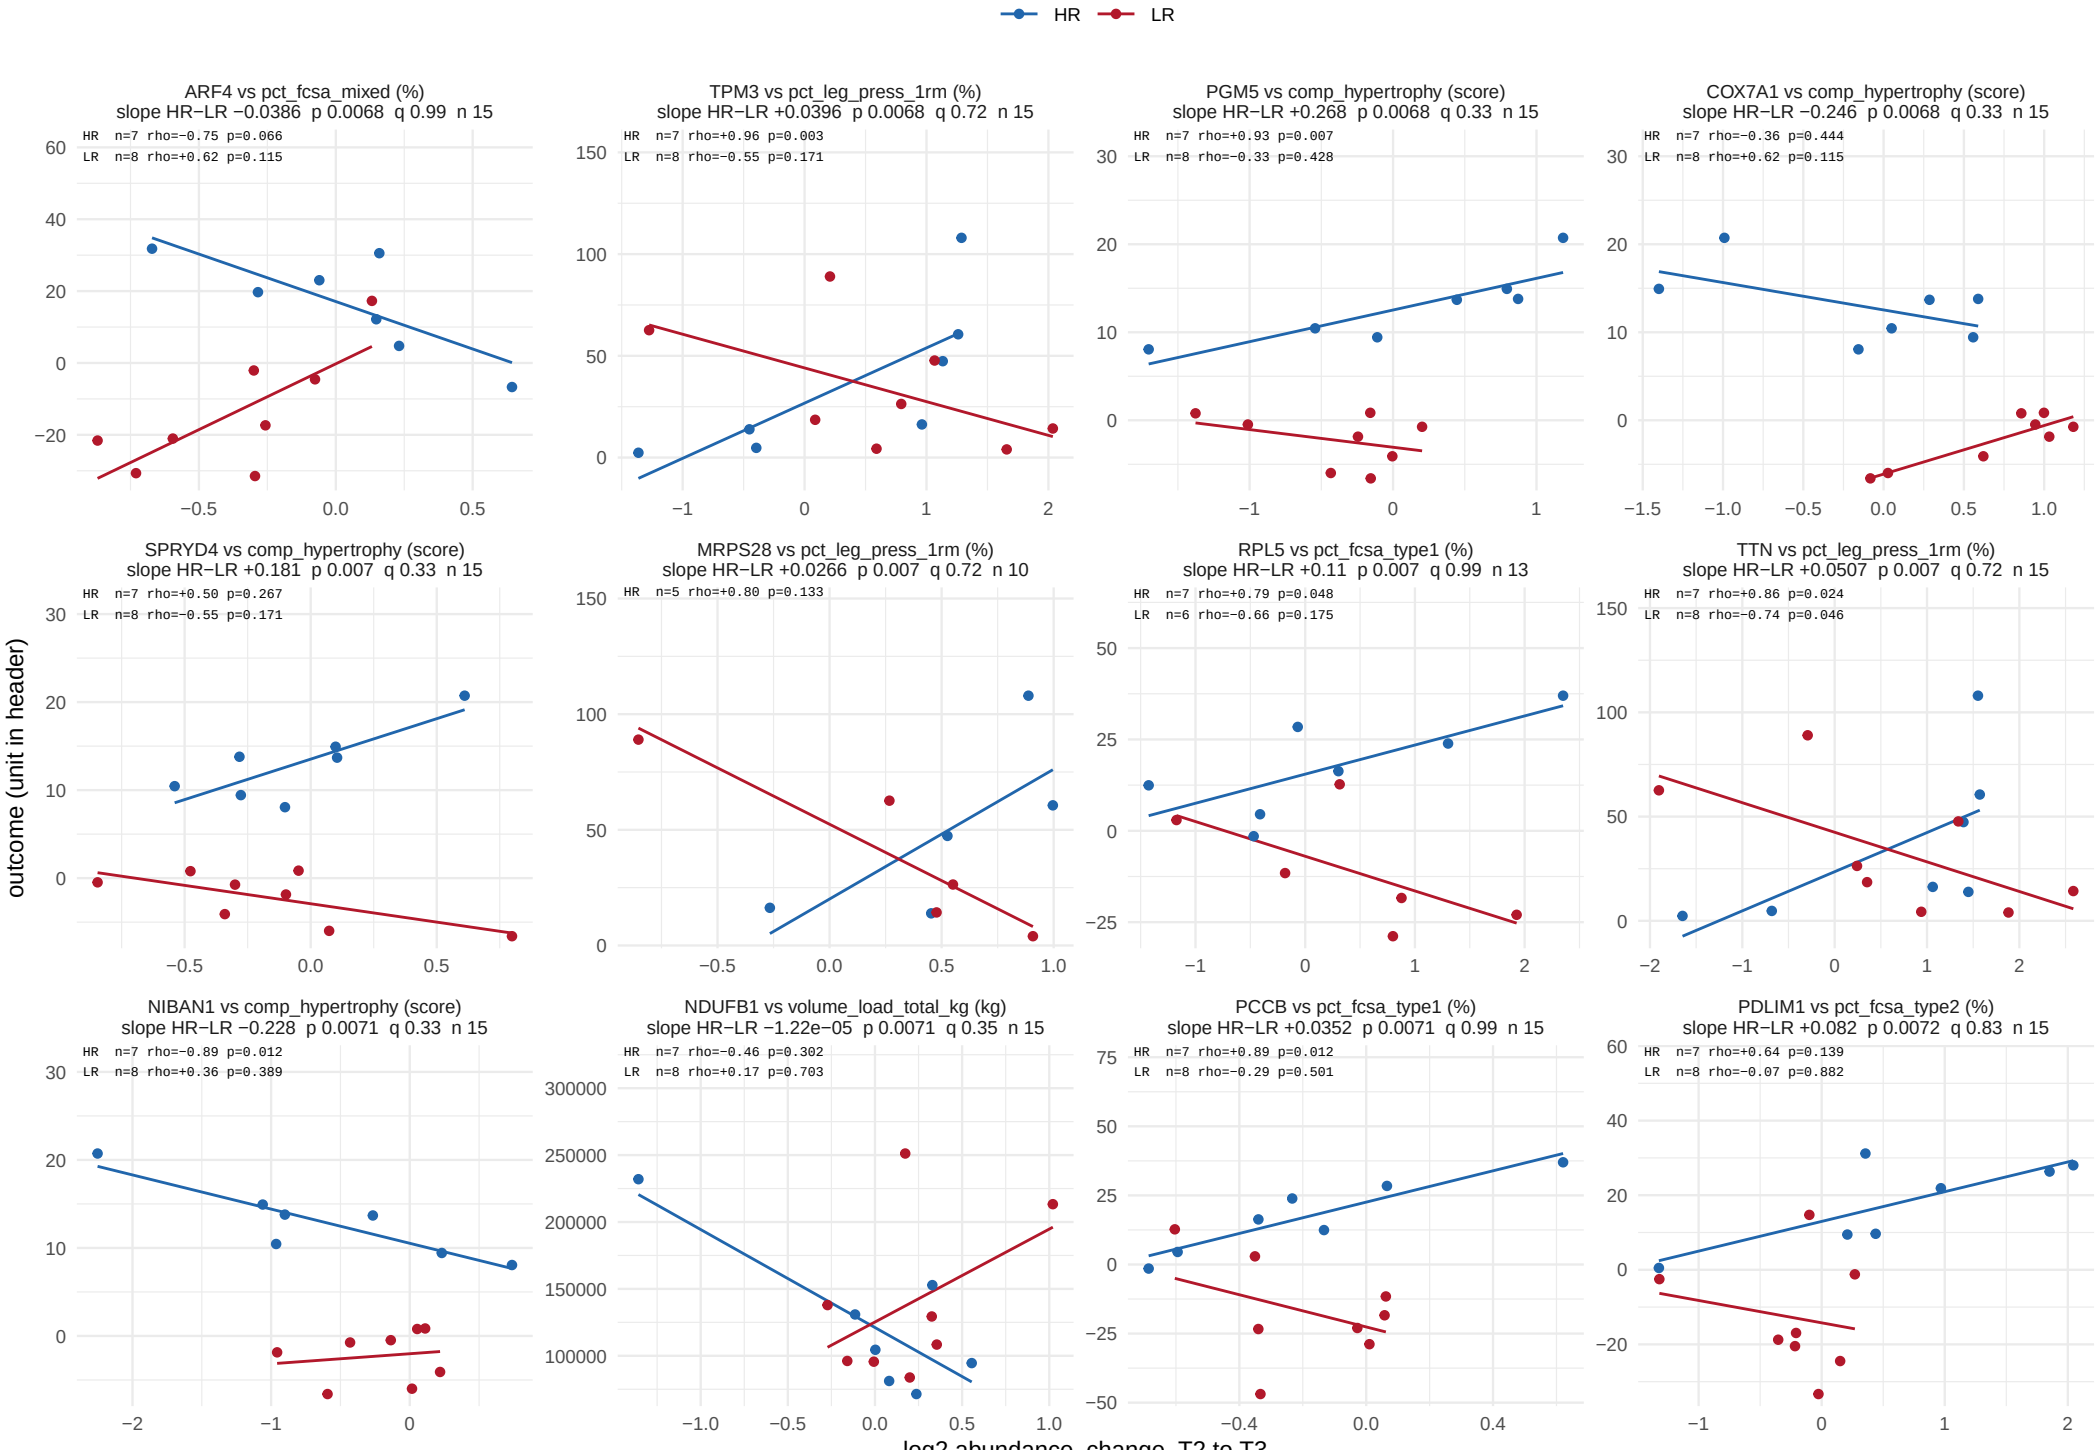

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


670 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 9 of 56.

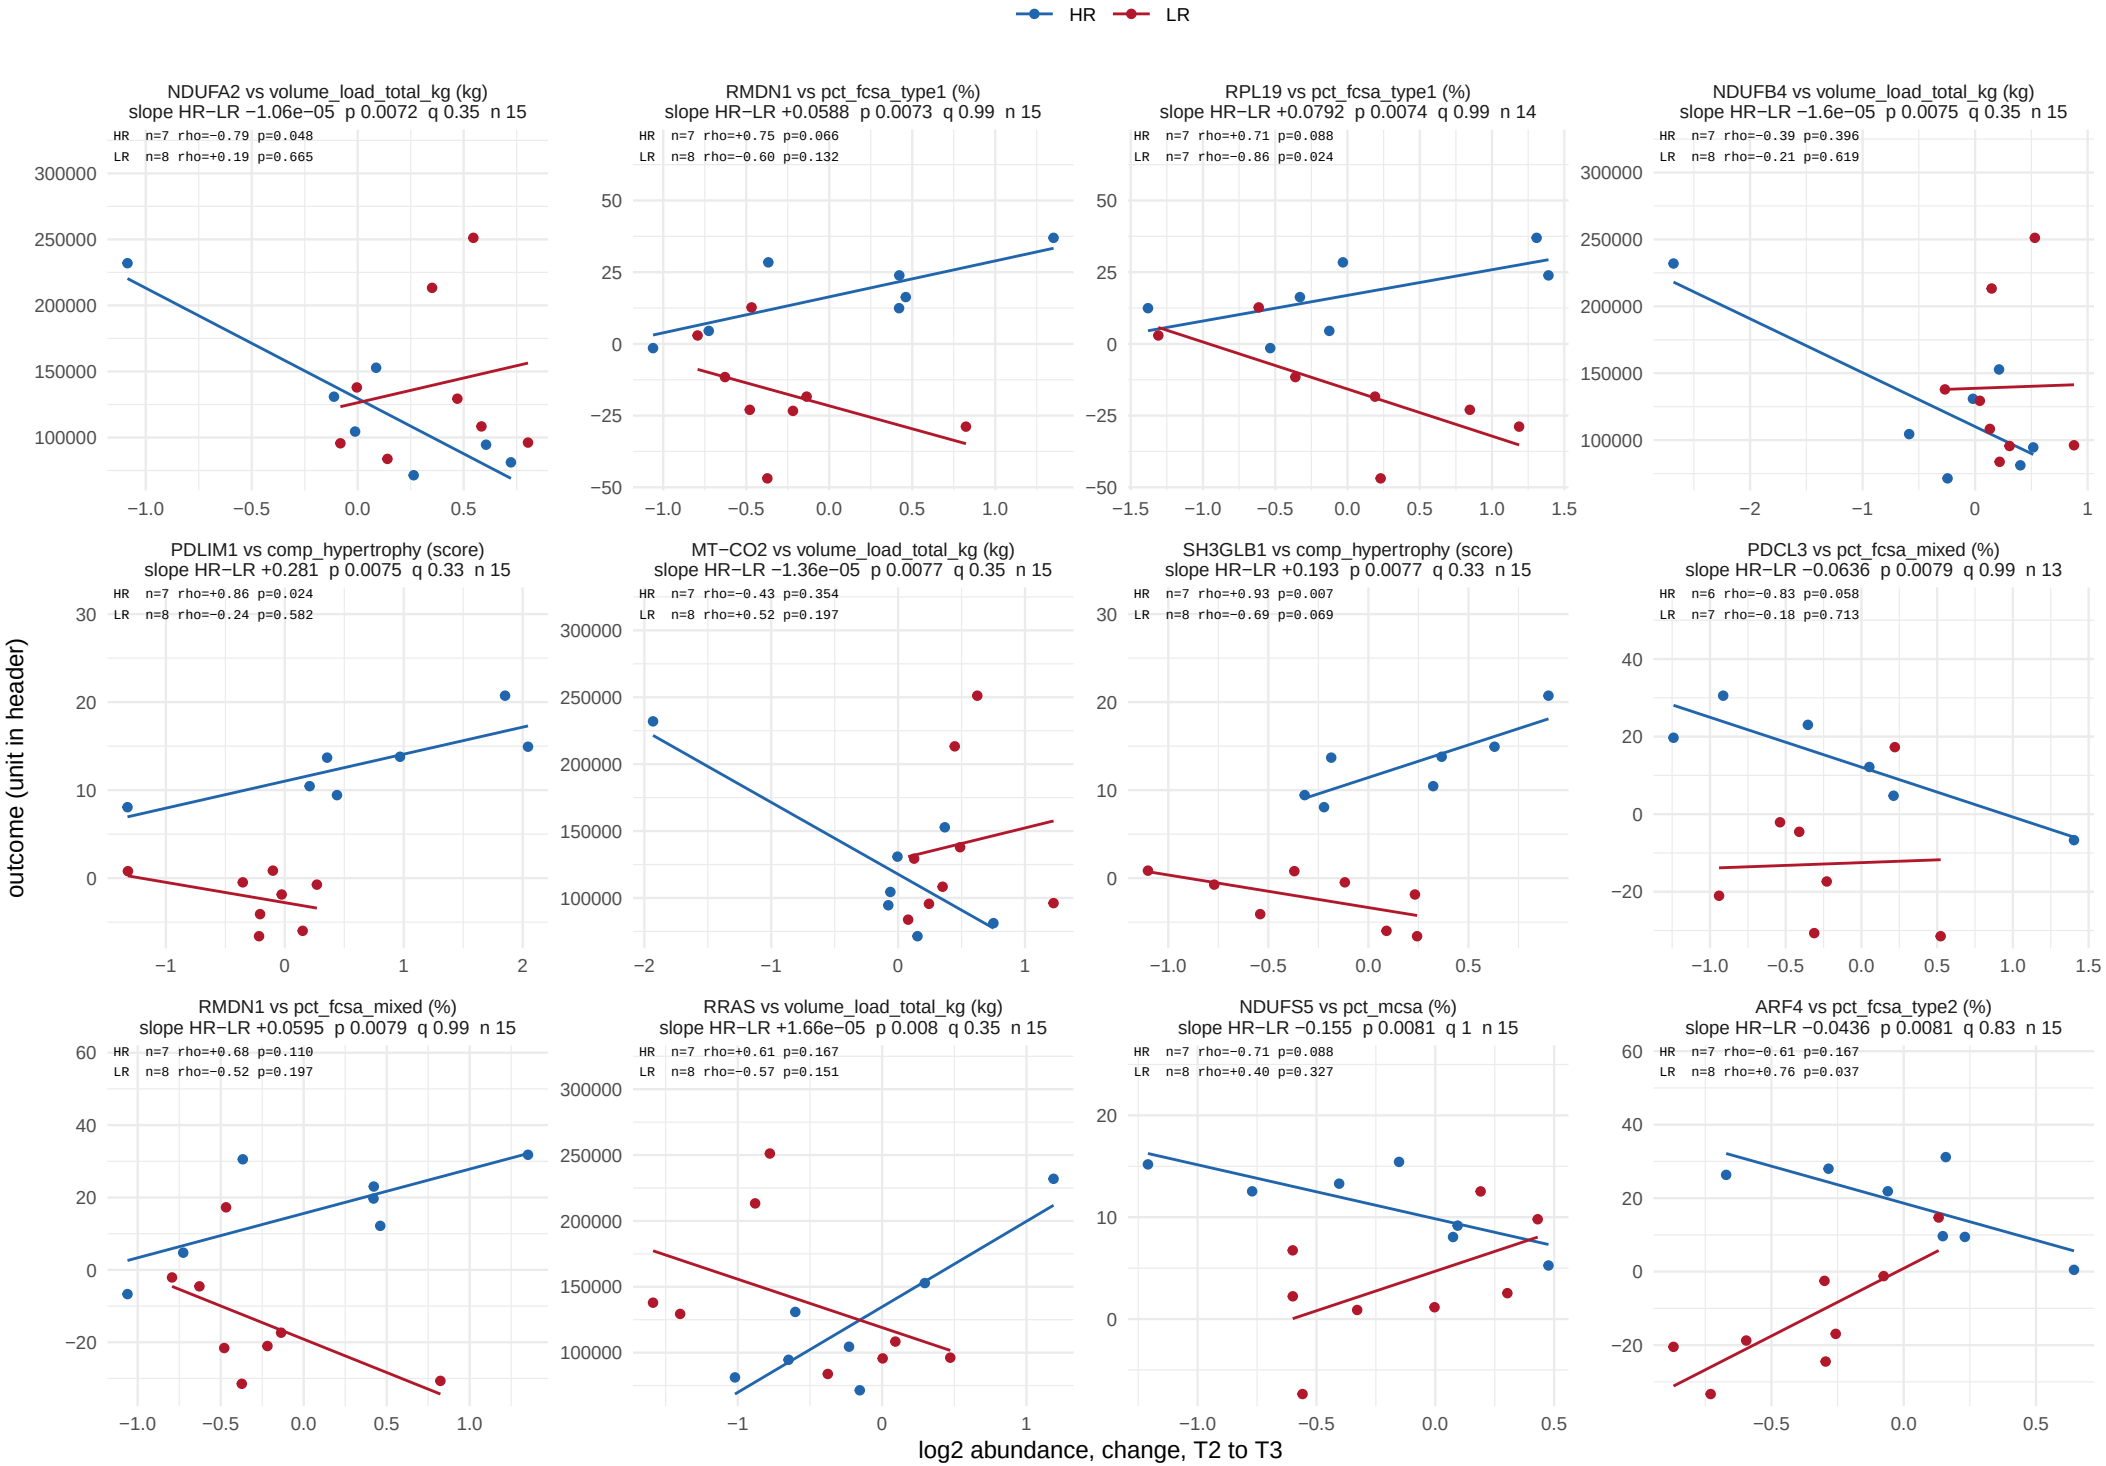

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


670 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 10 of 56.

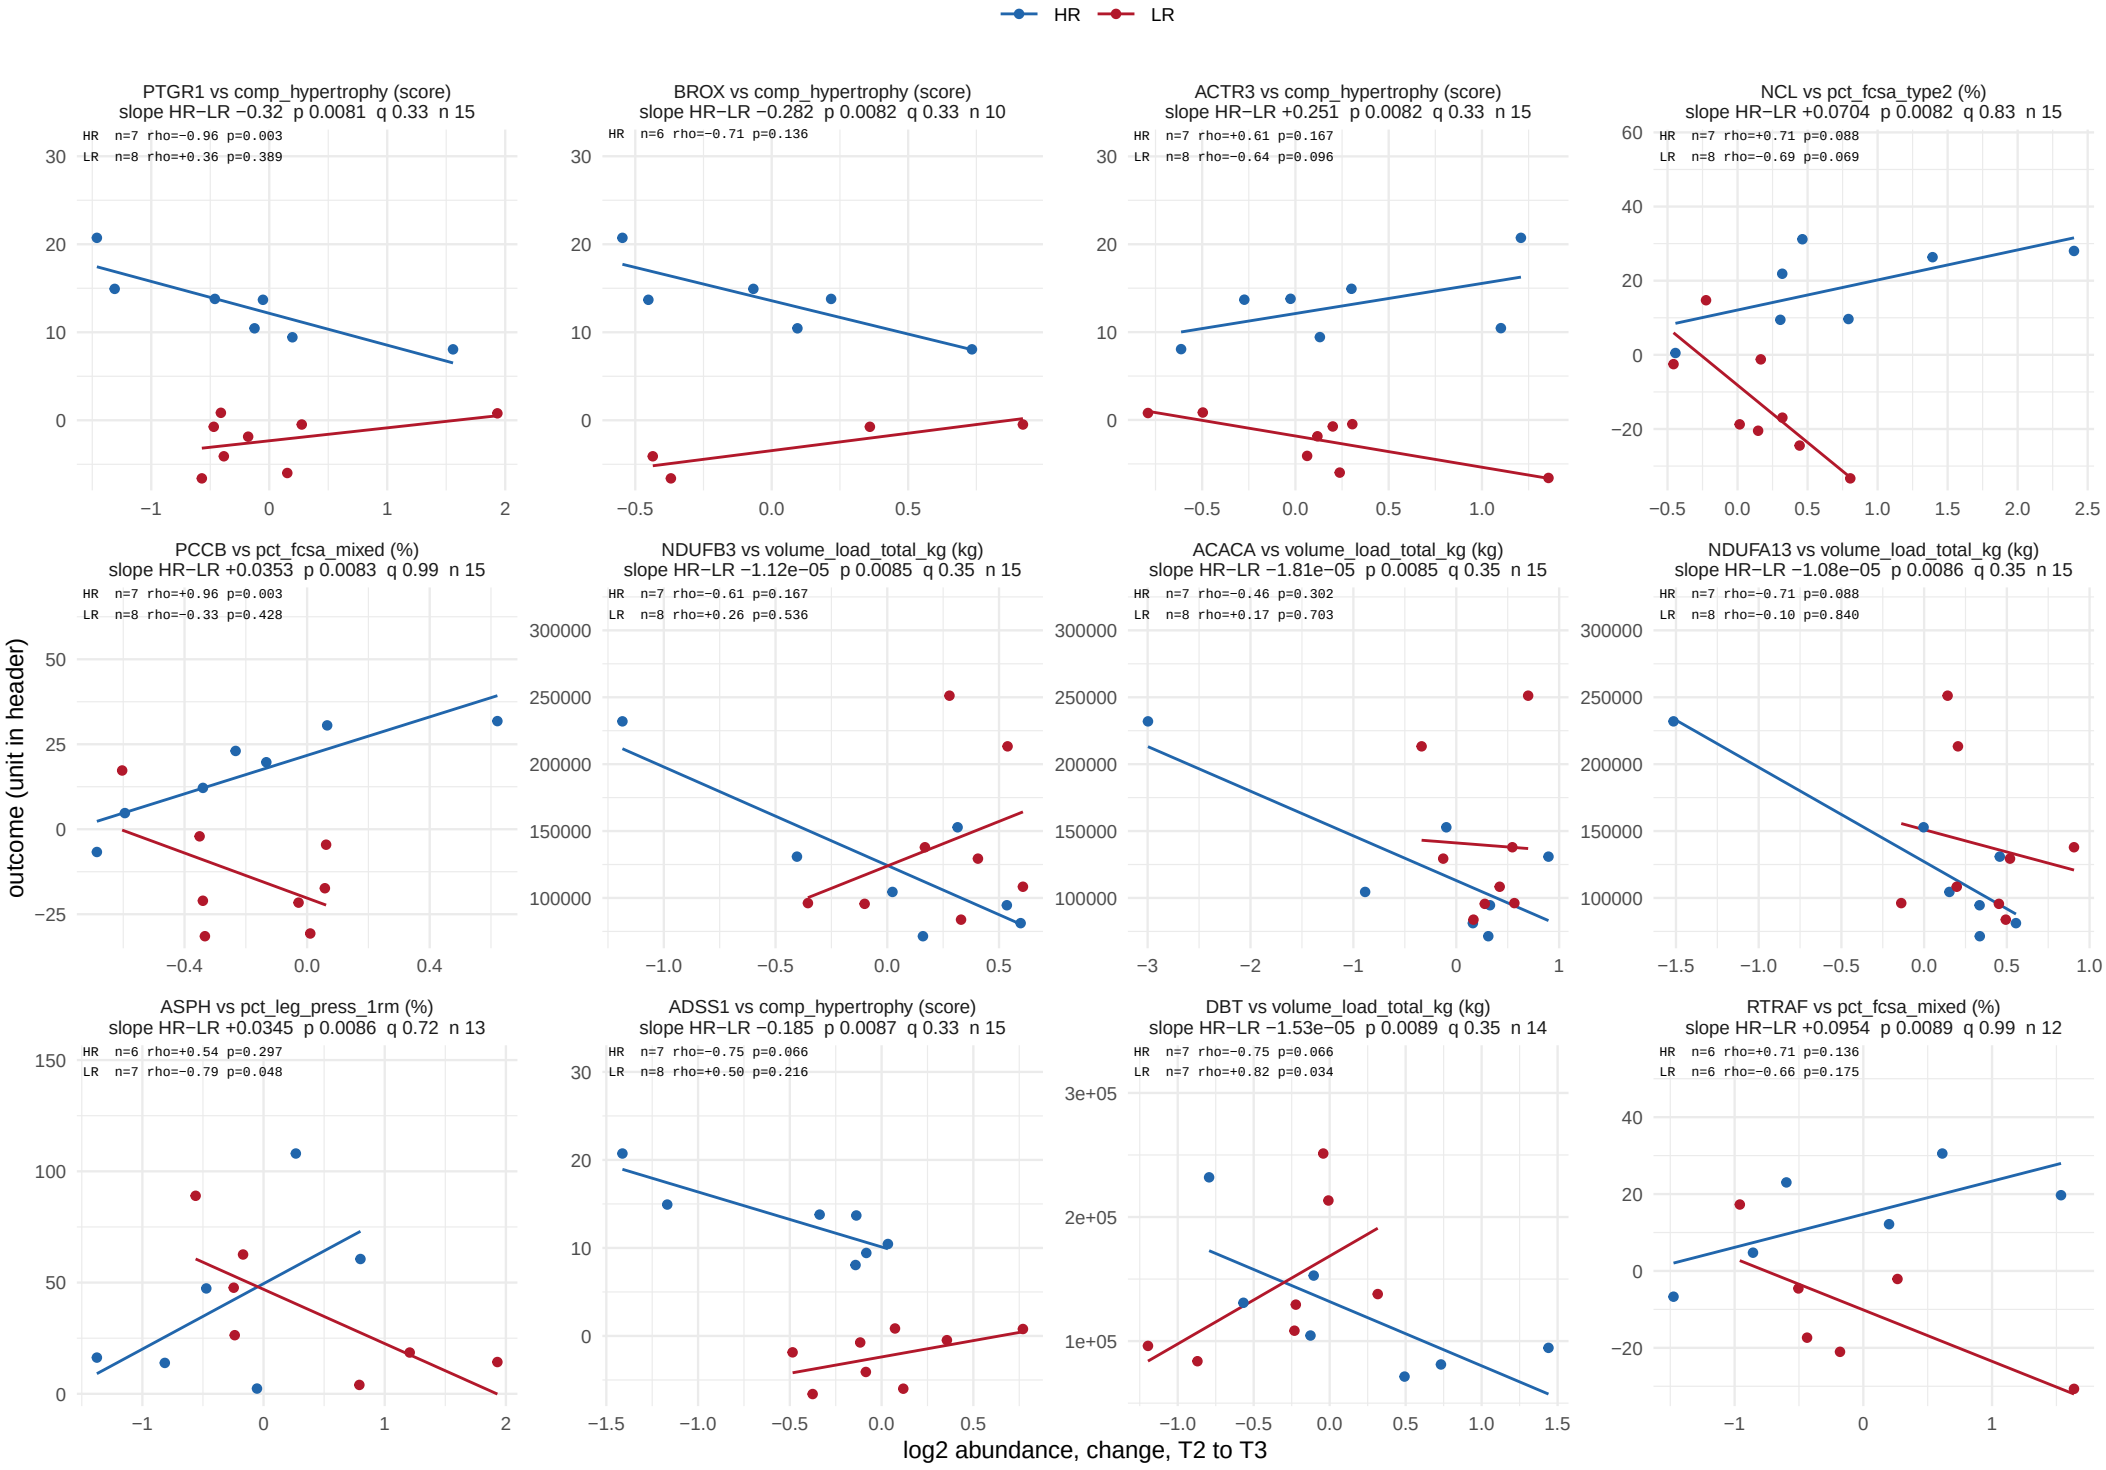

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


670 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 11 of 56.

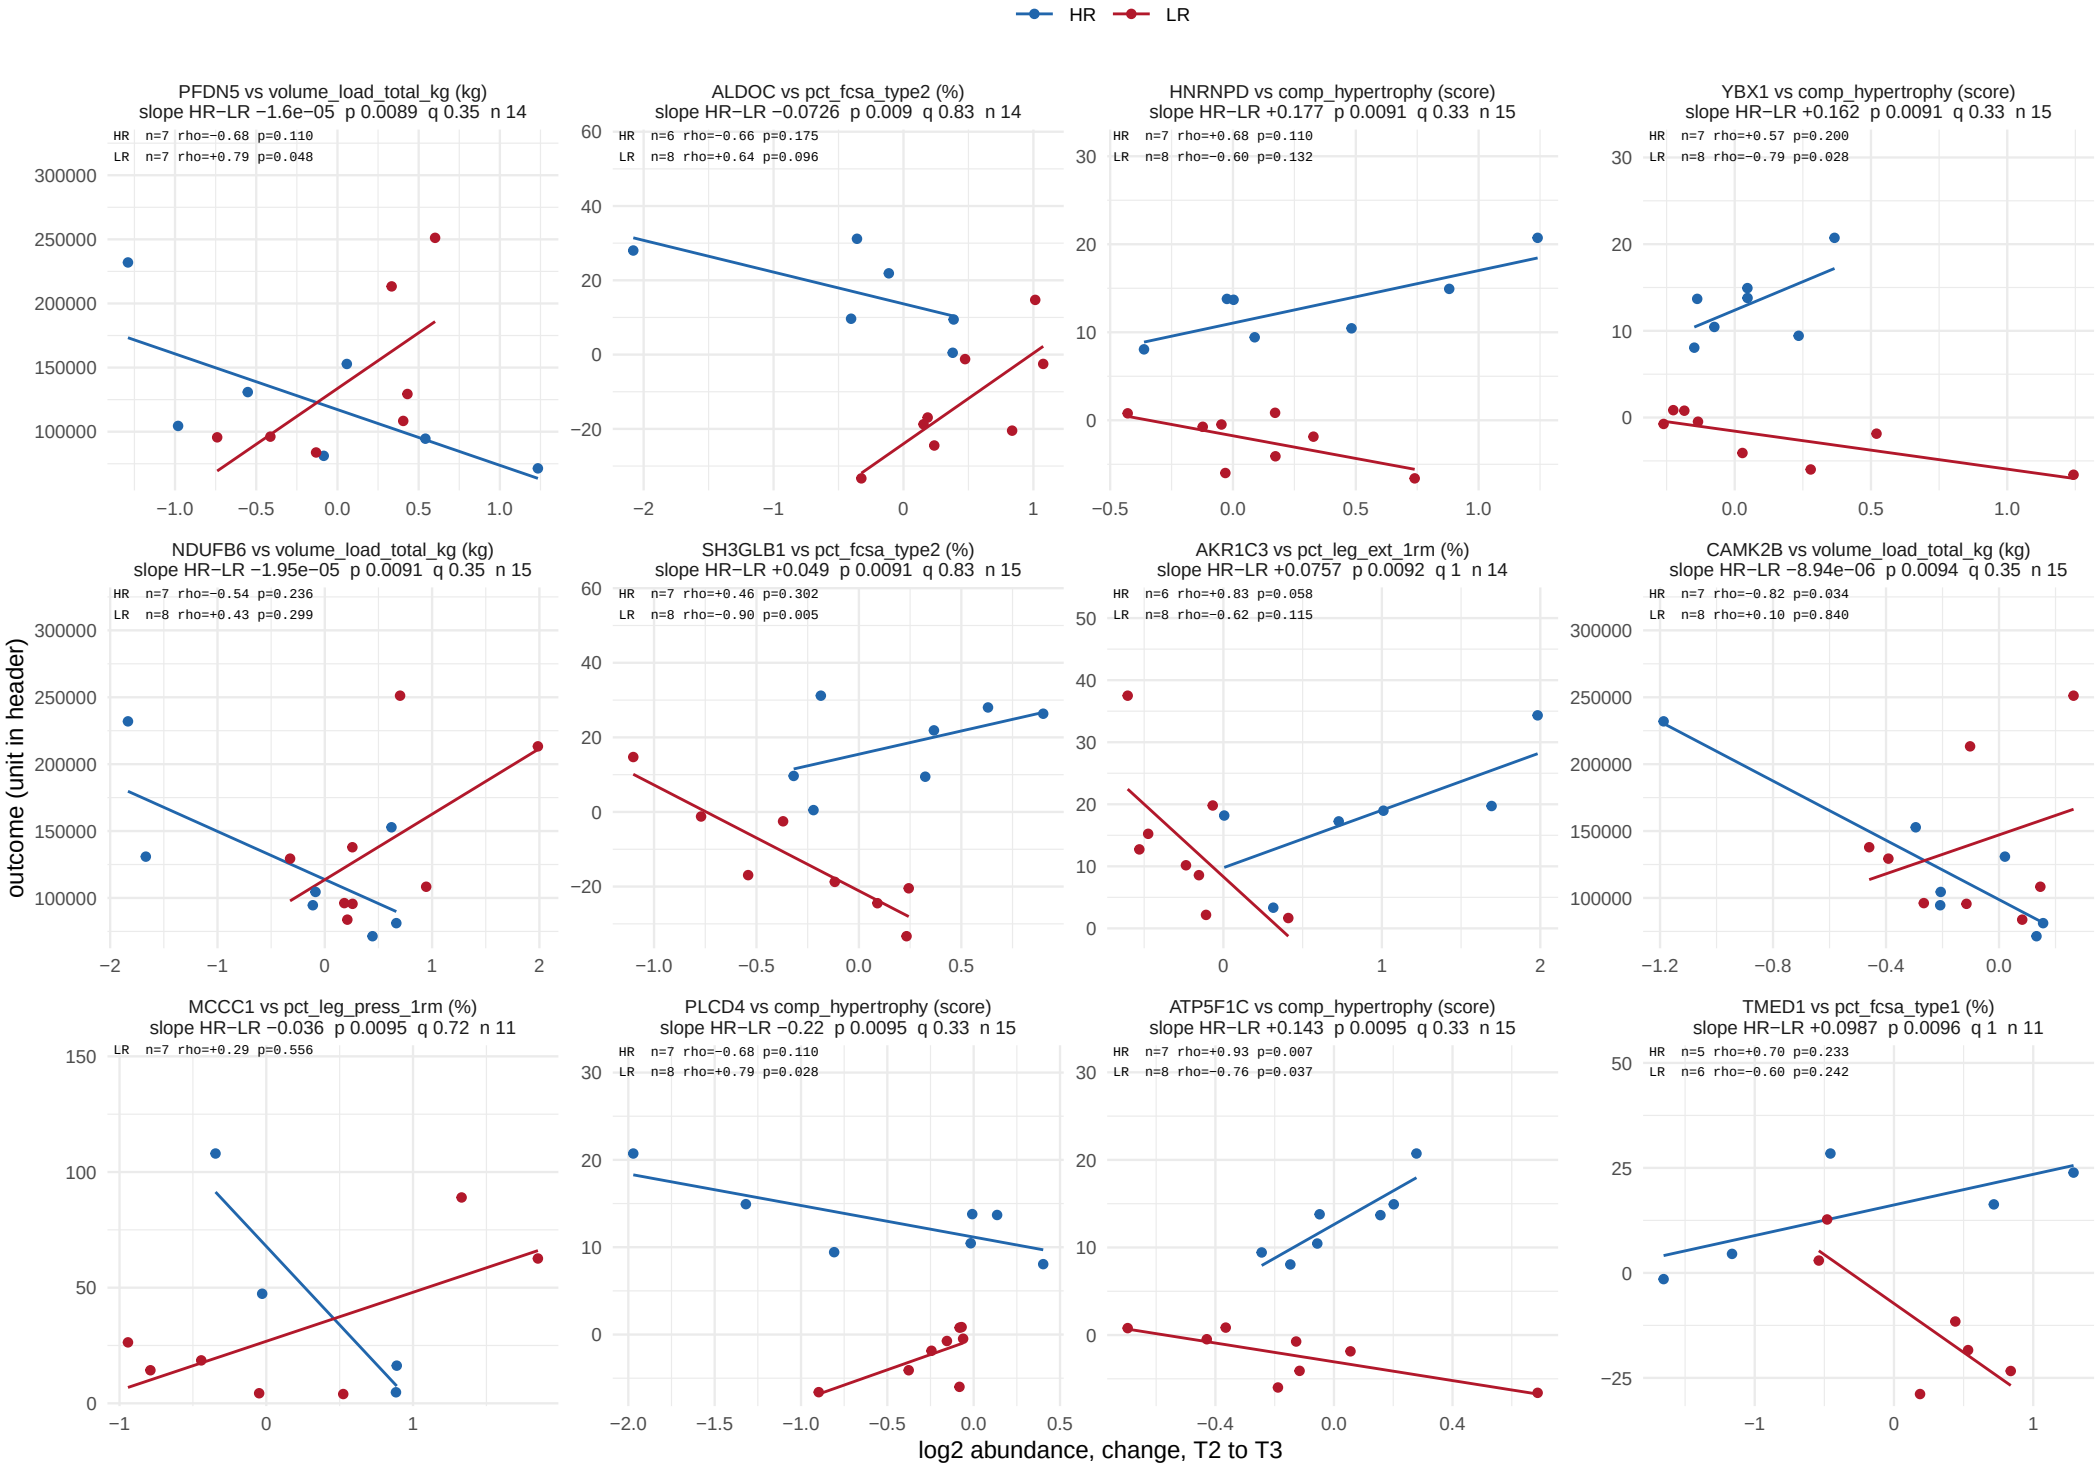

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


670 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 12 of 56.

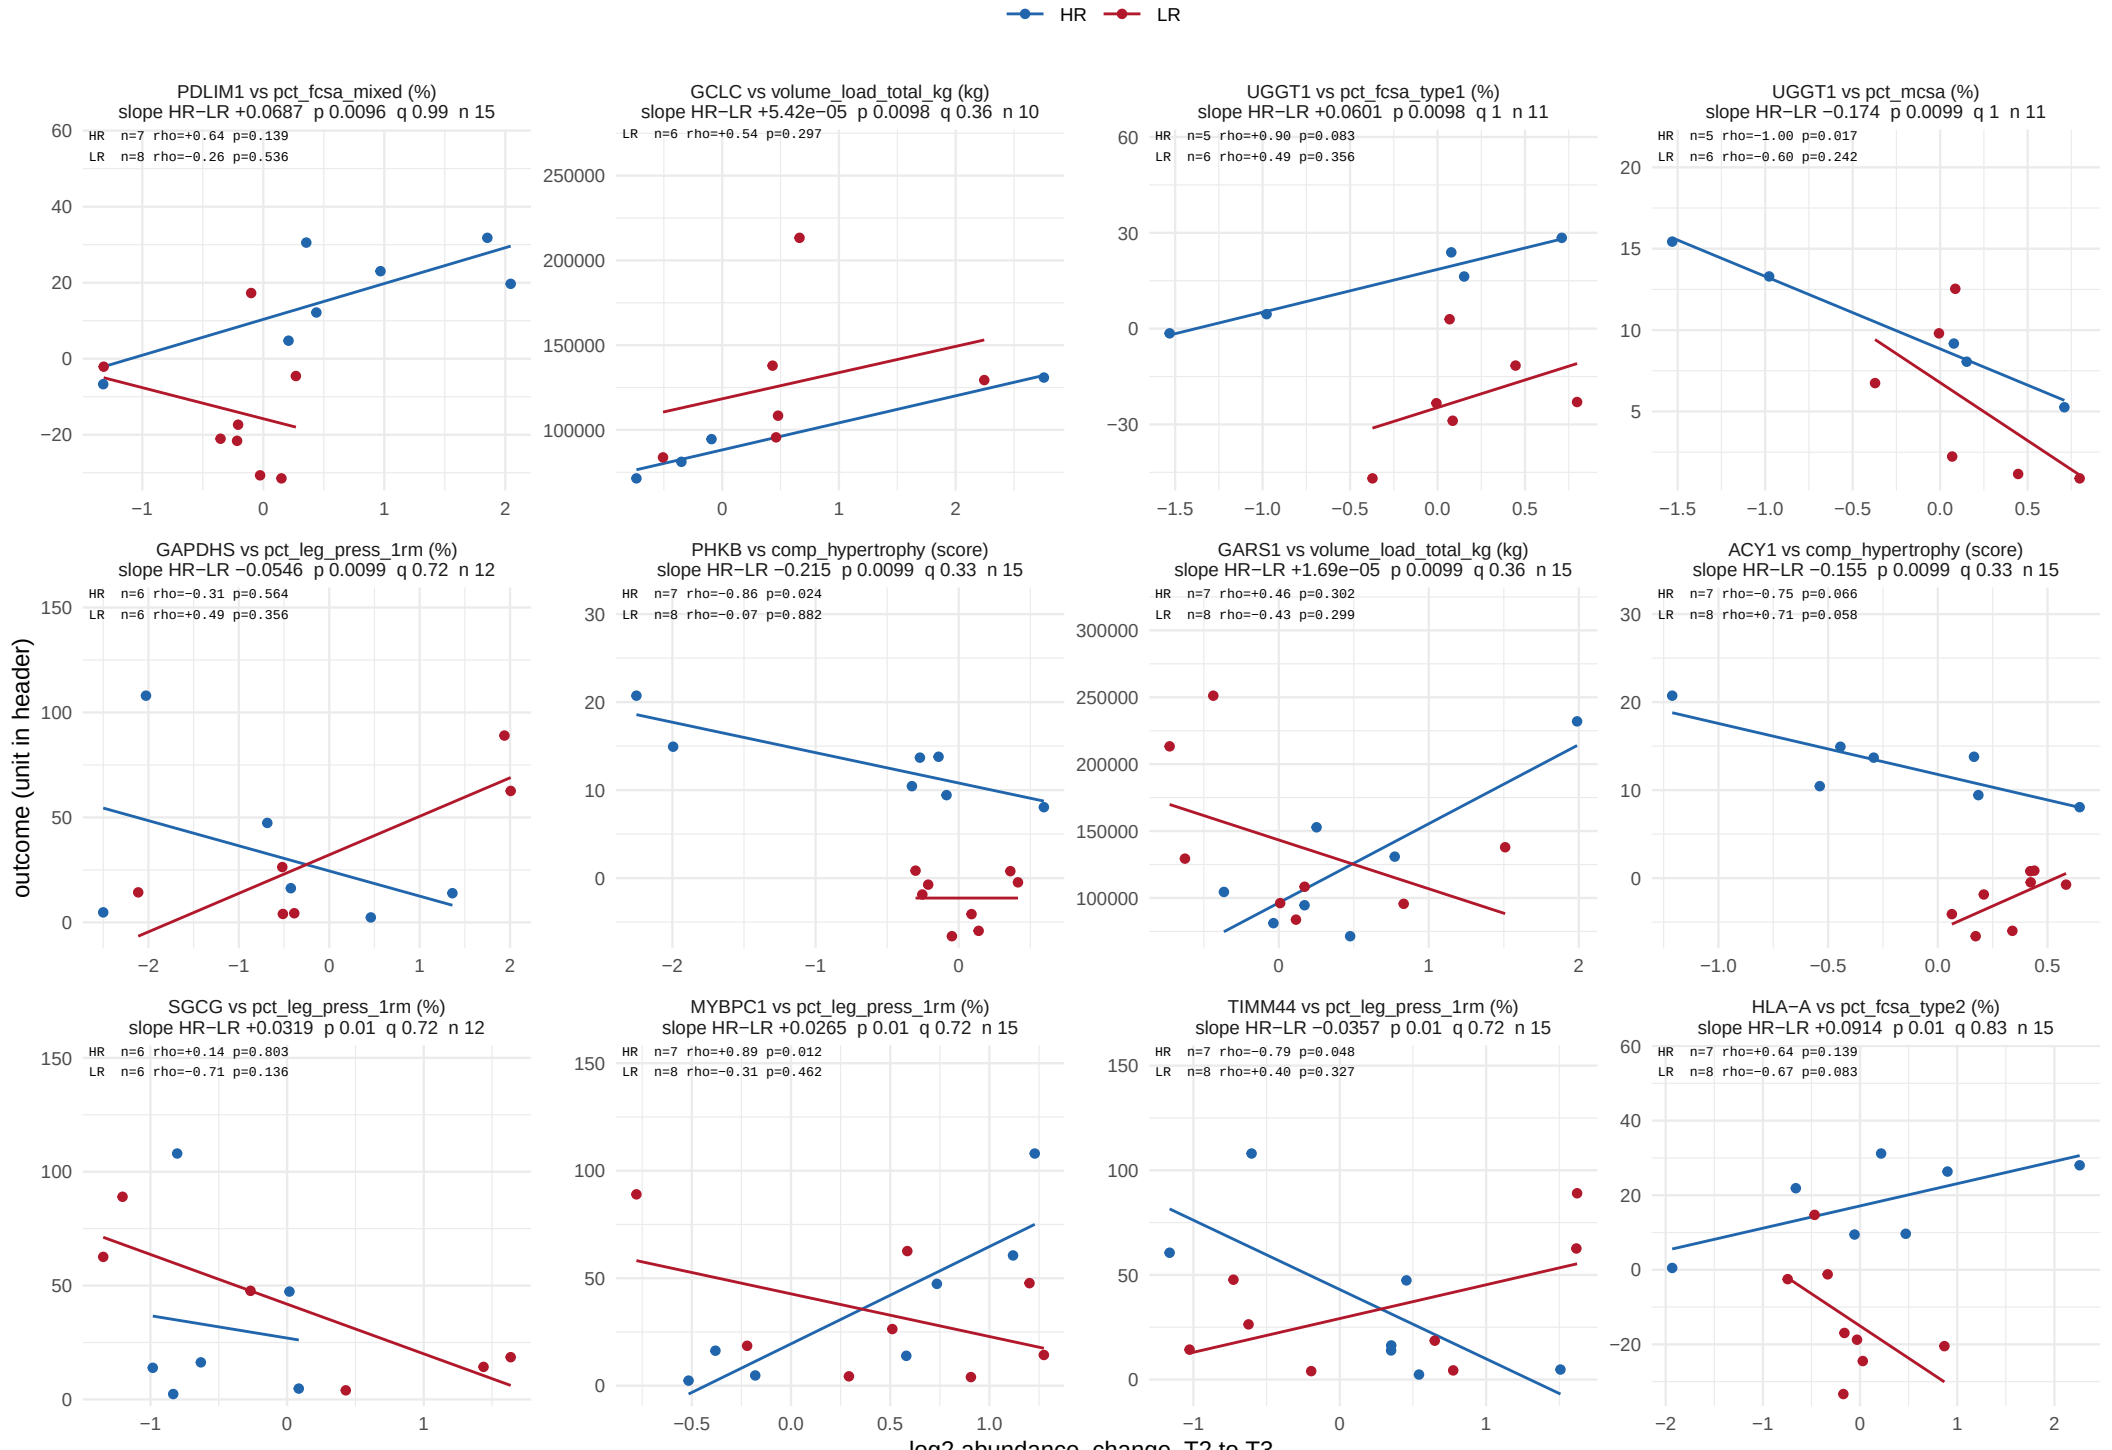

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


670 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 13 of 56.

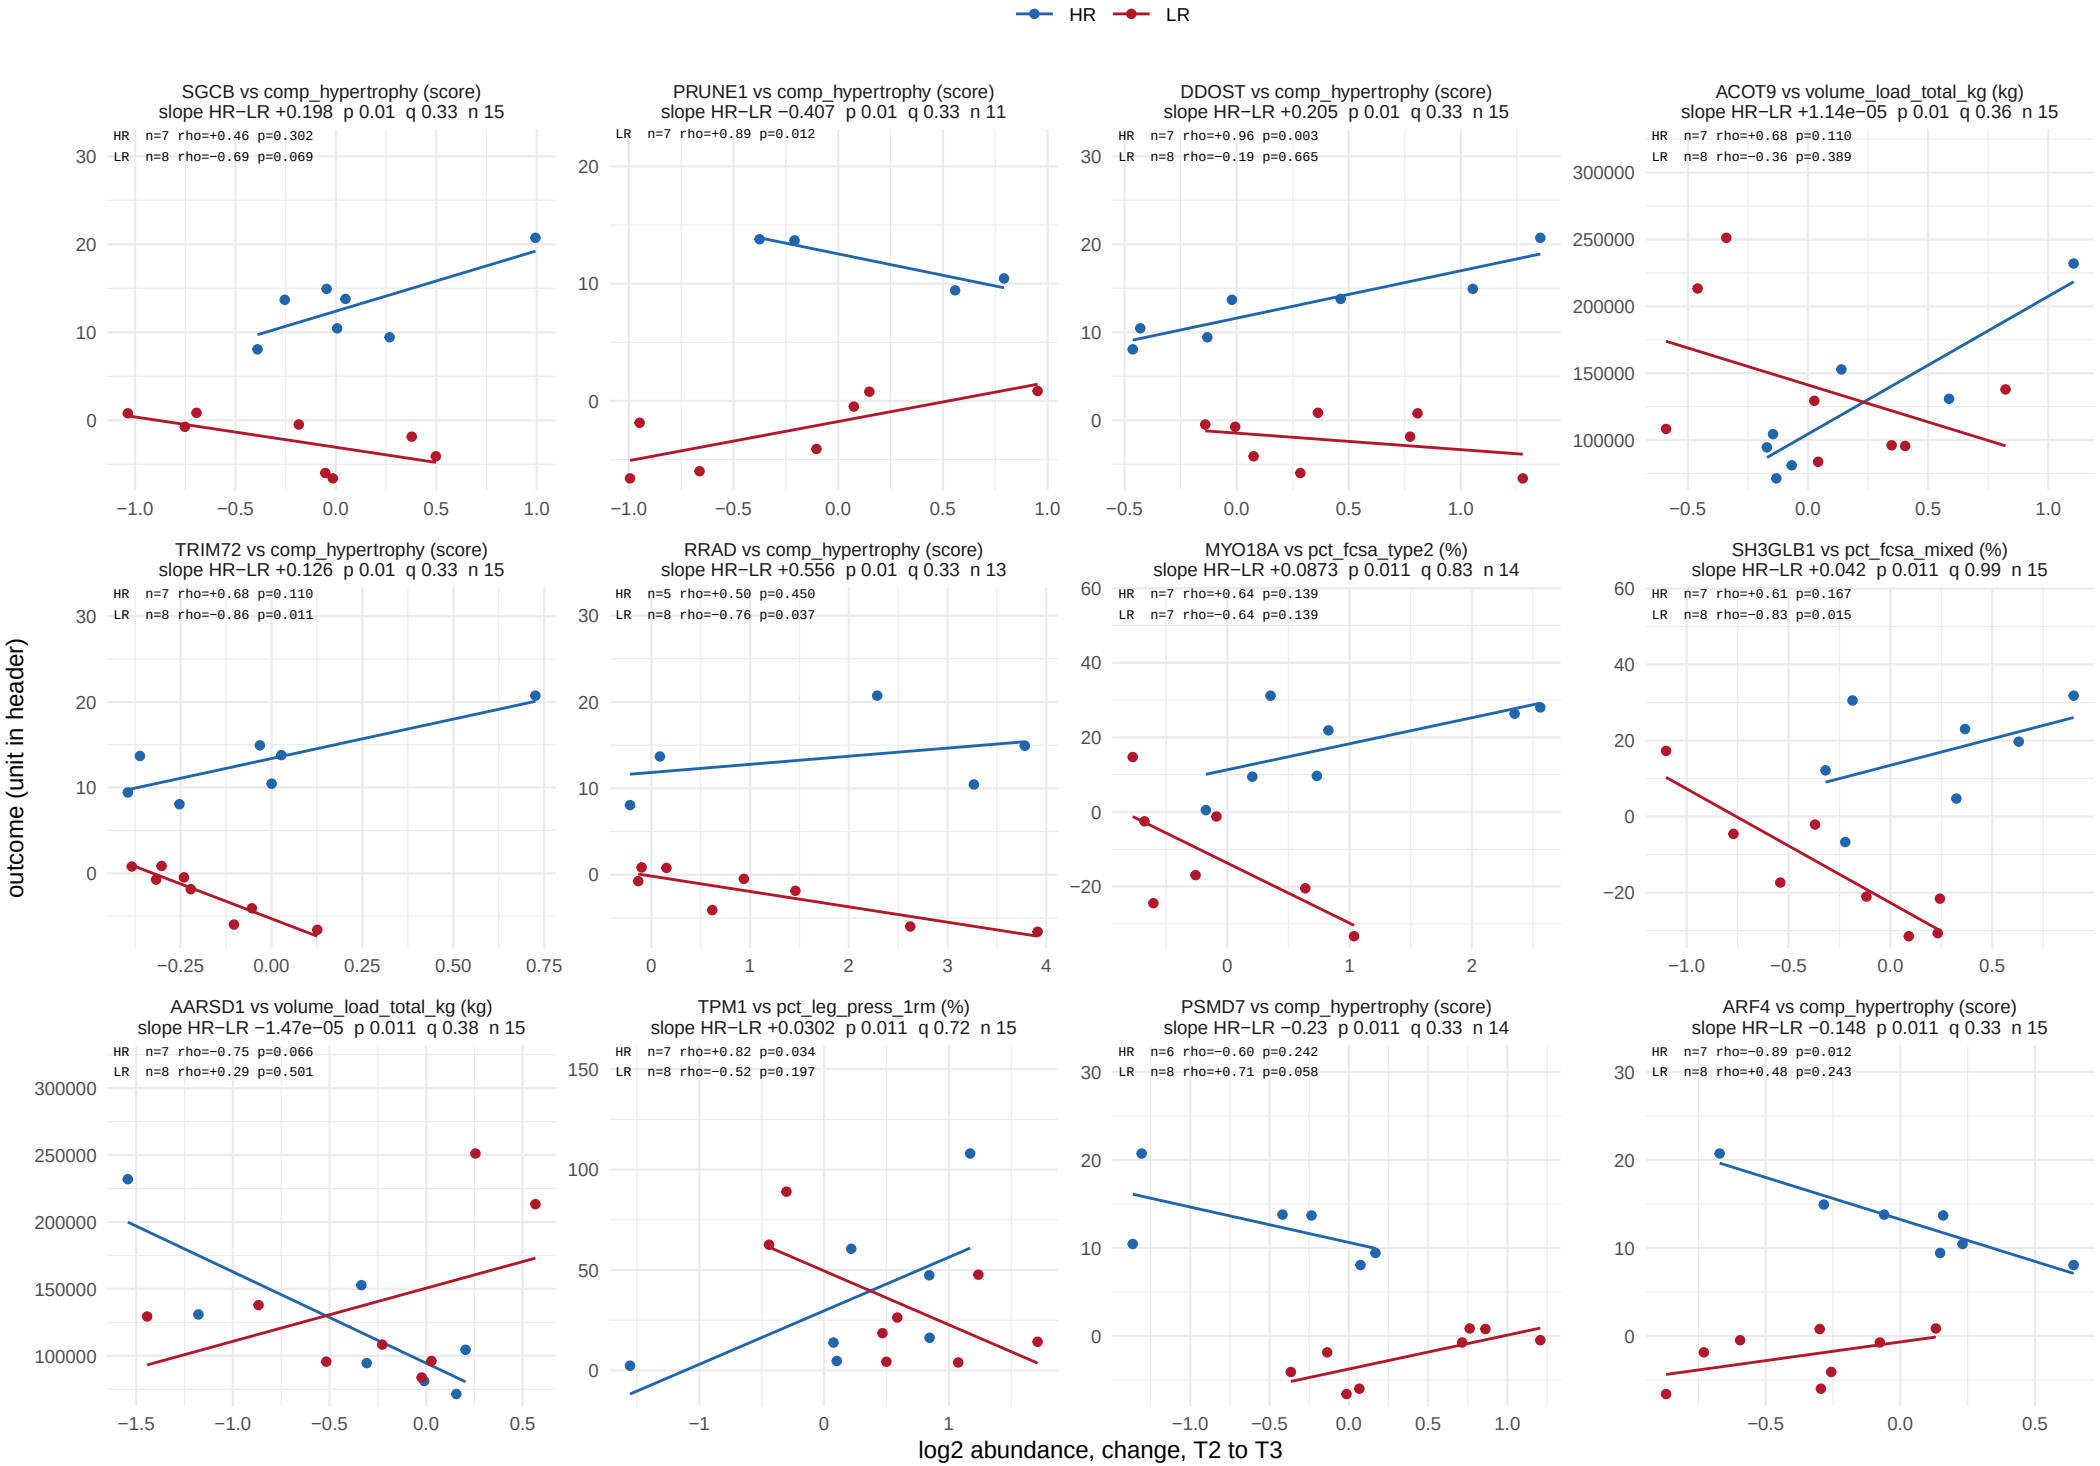

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


670 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 14 of 56.

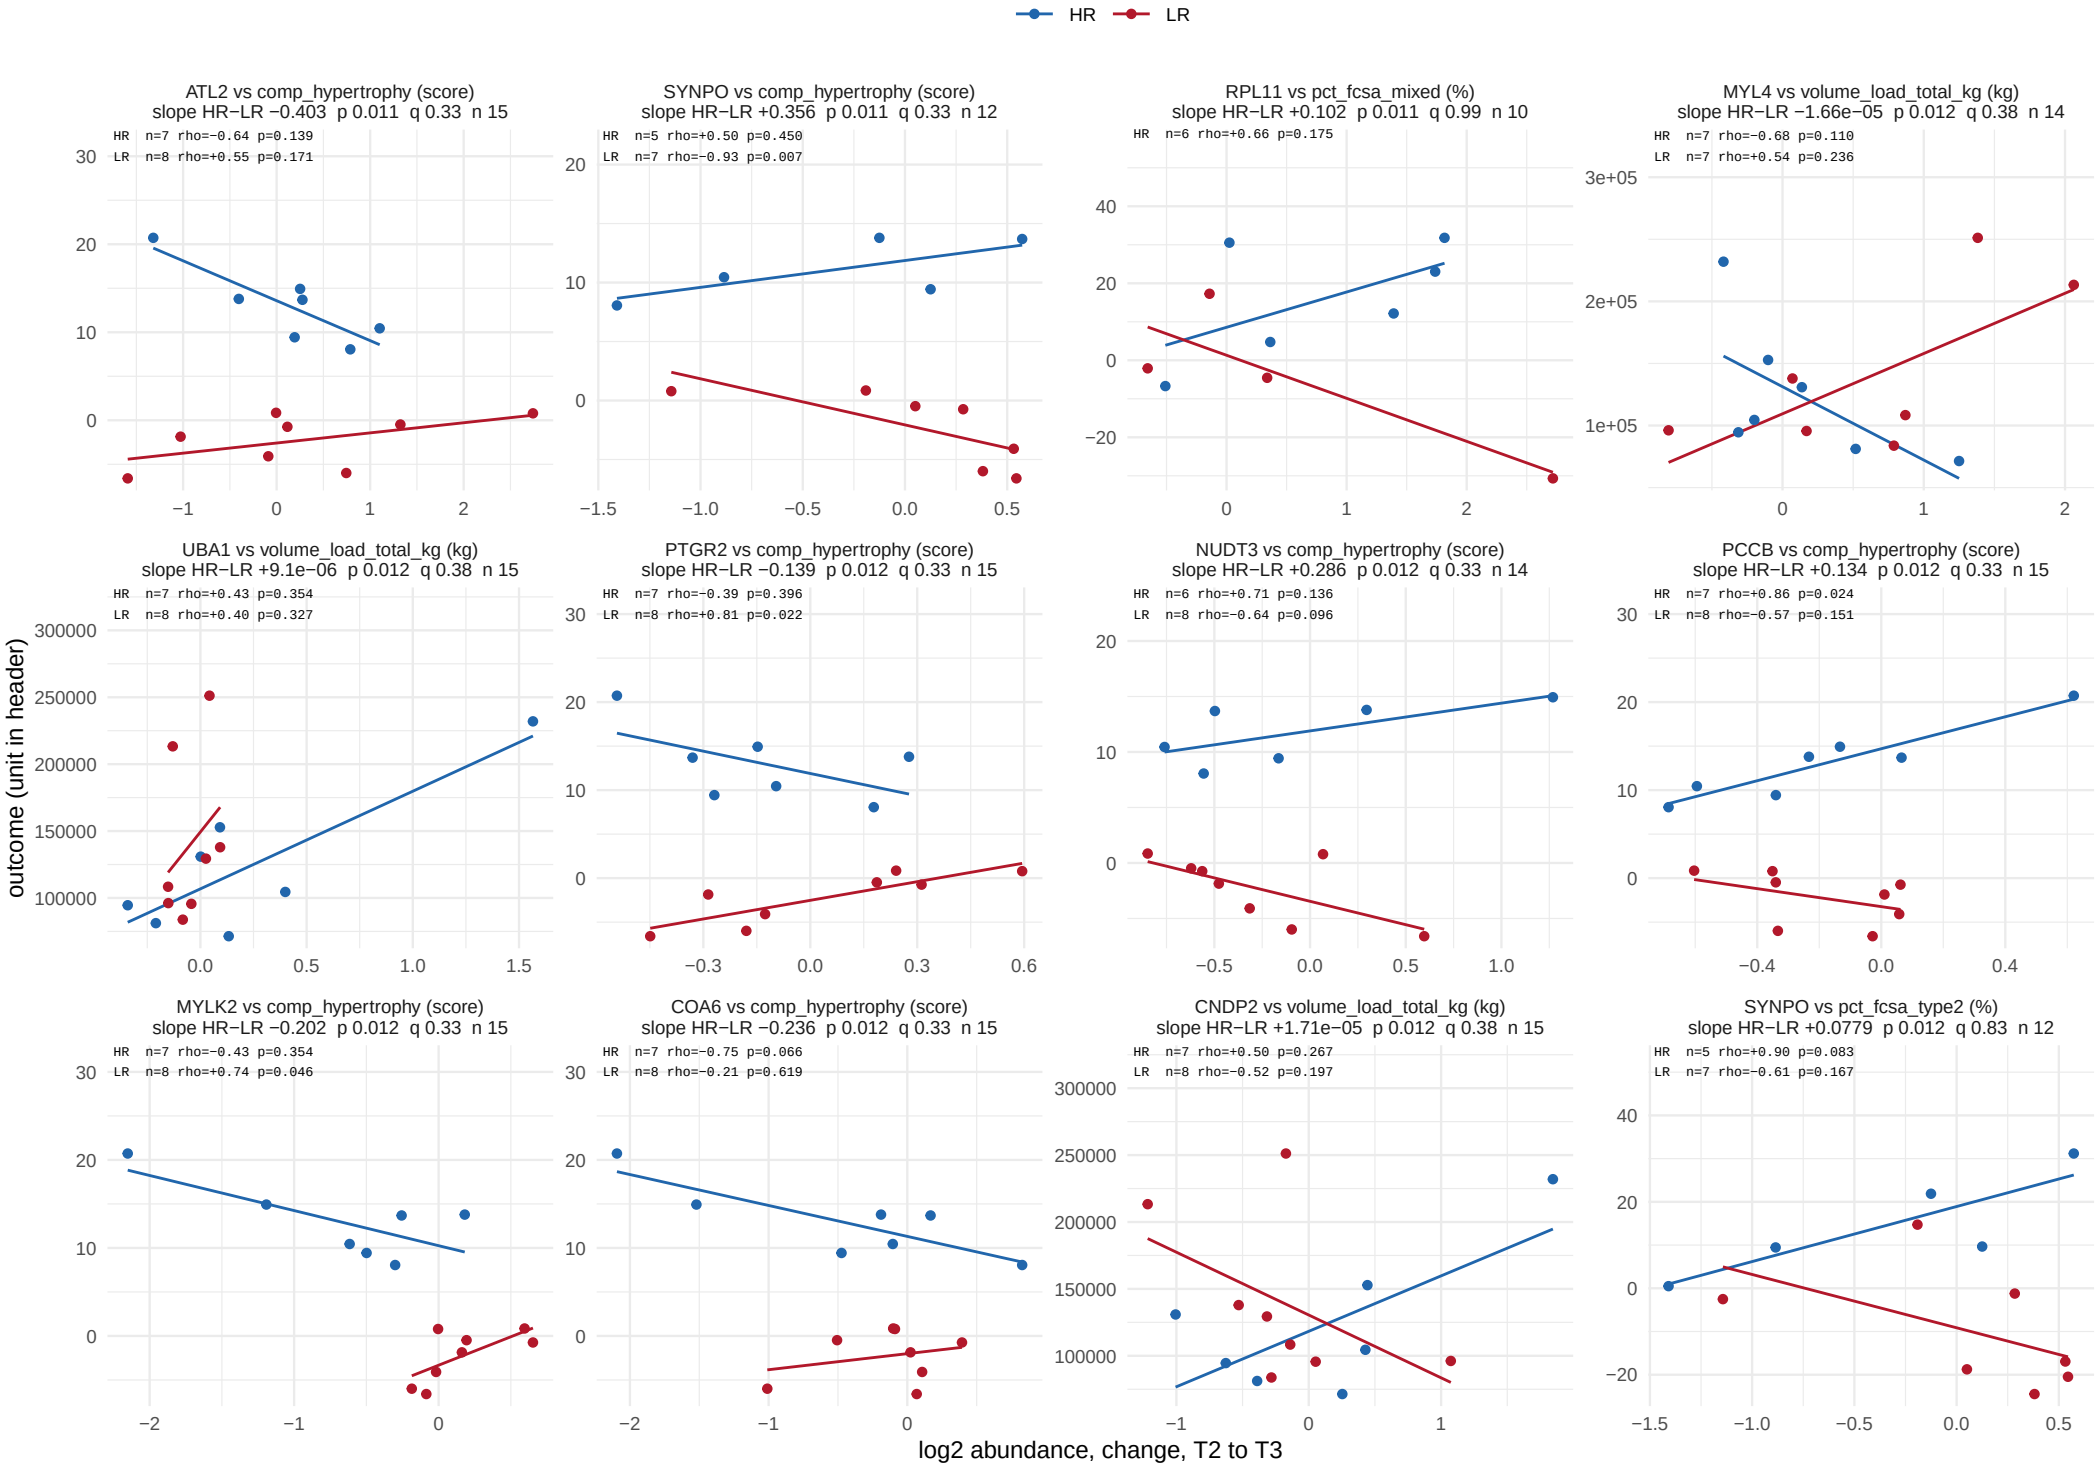

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


670 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 15 of 56.

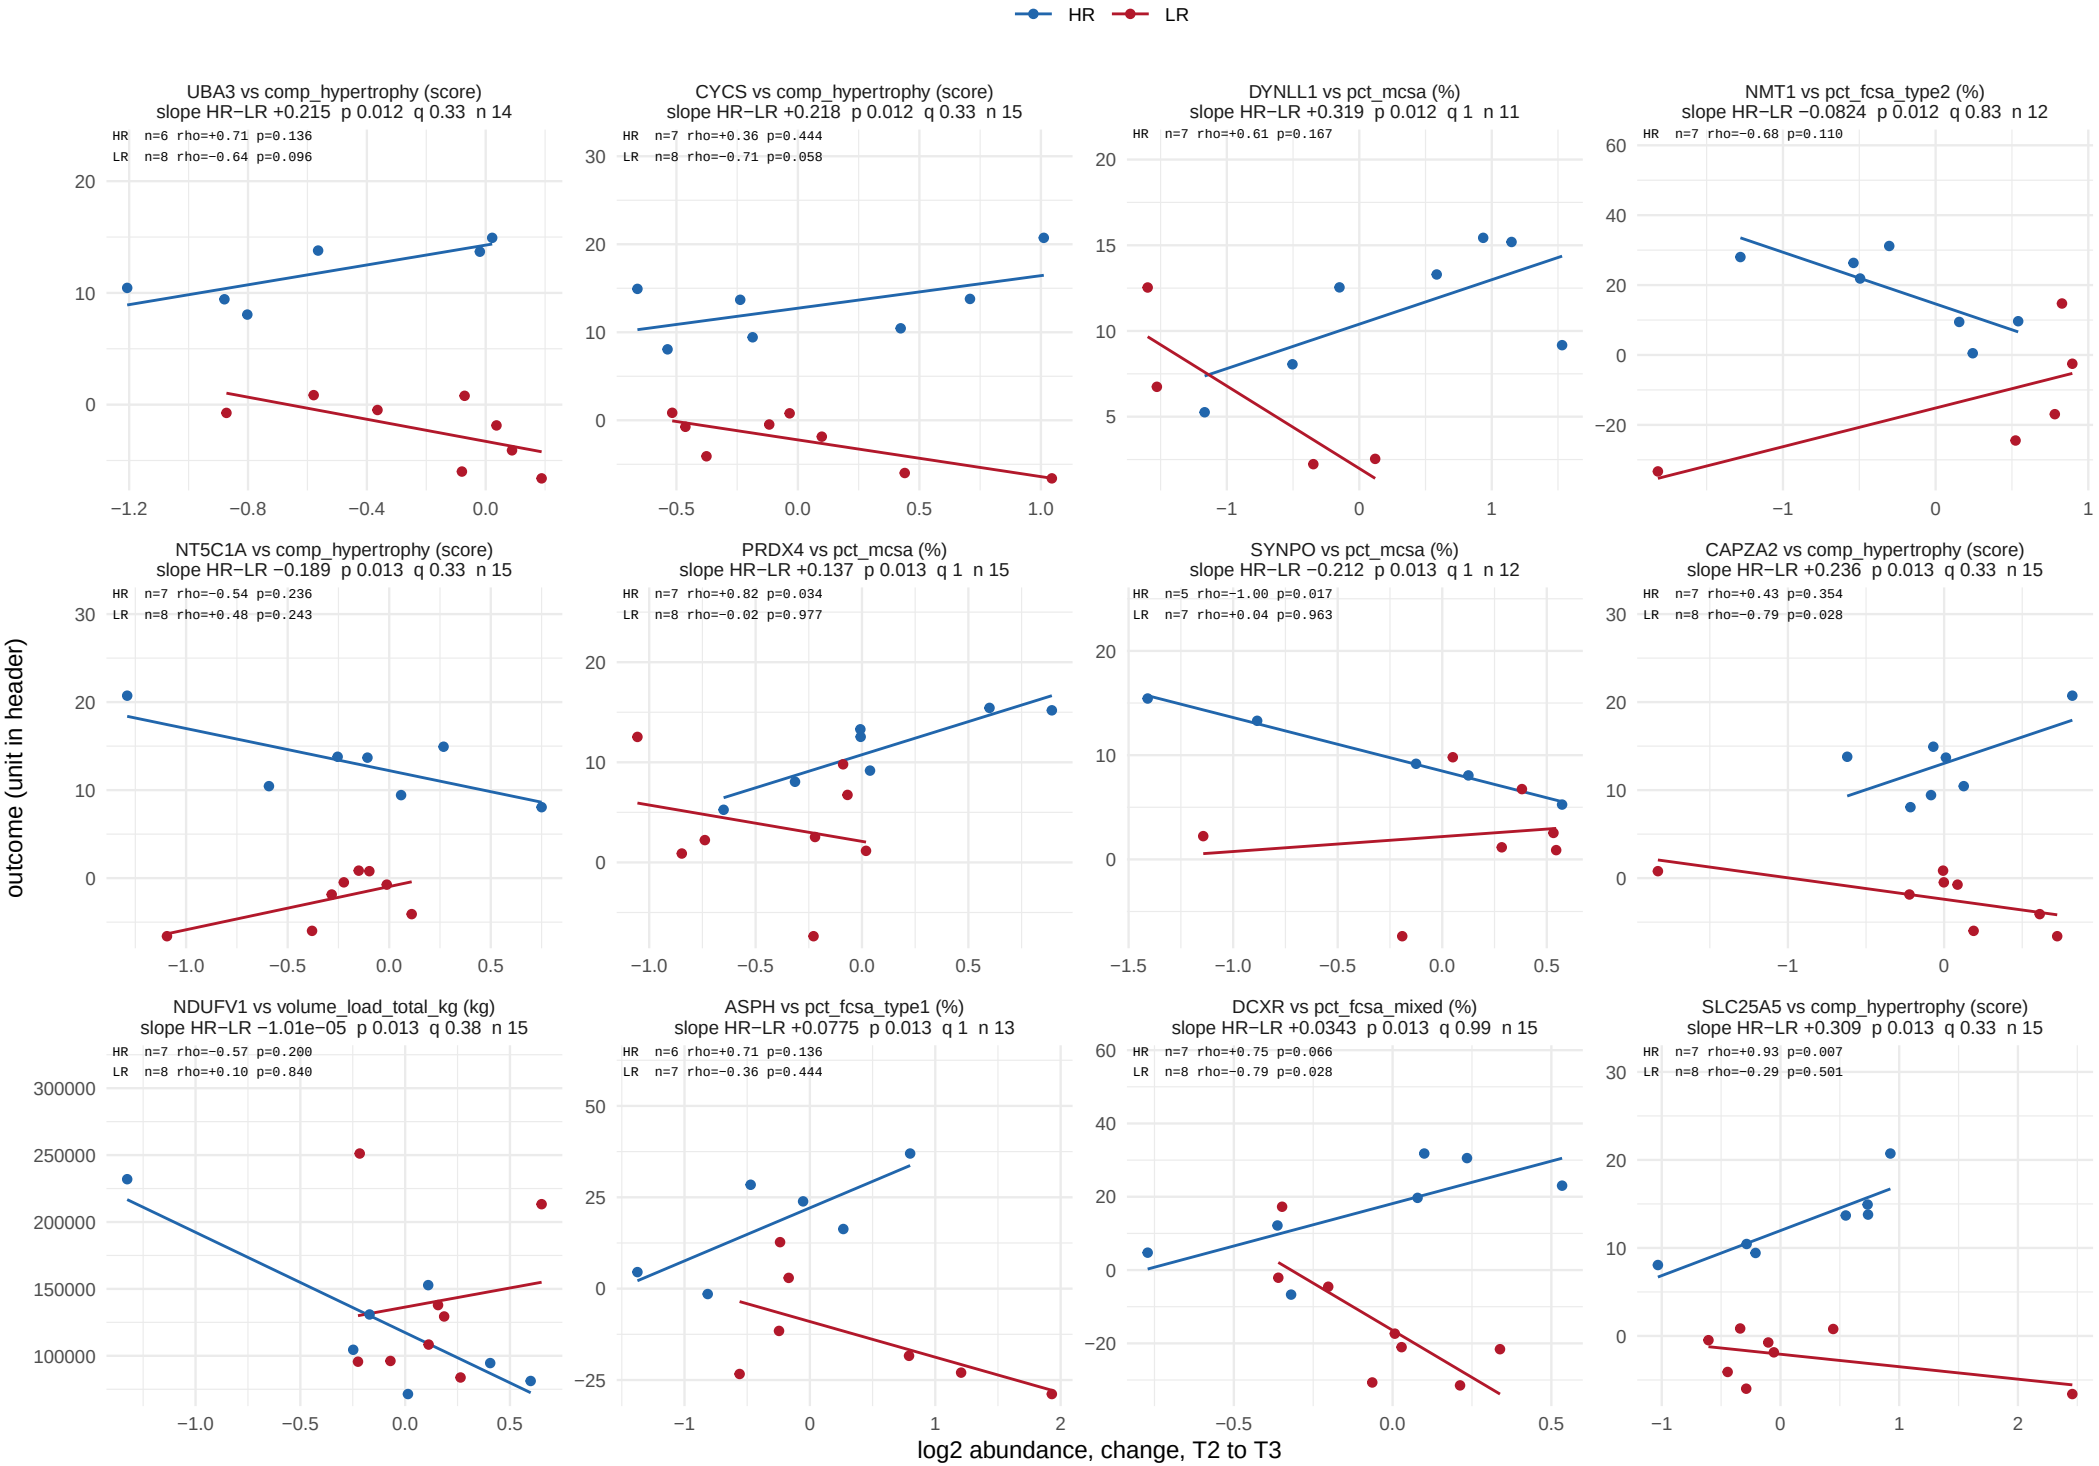

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


670 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 16 of 56.

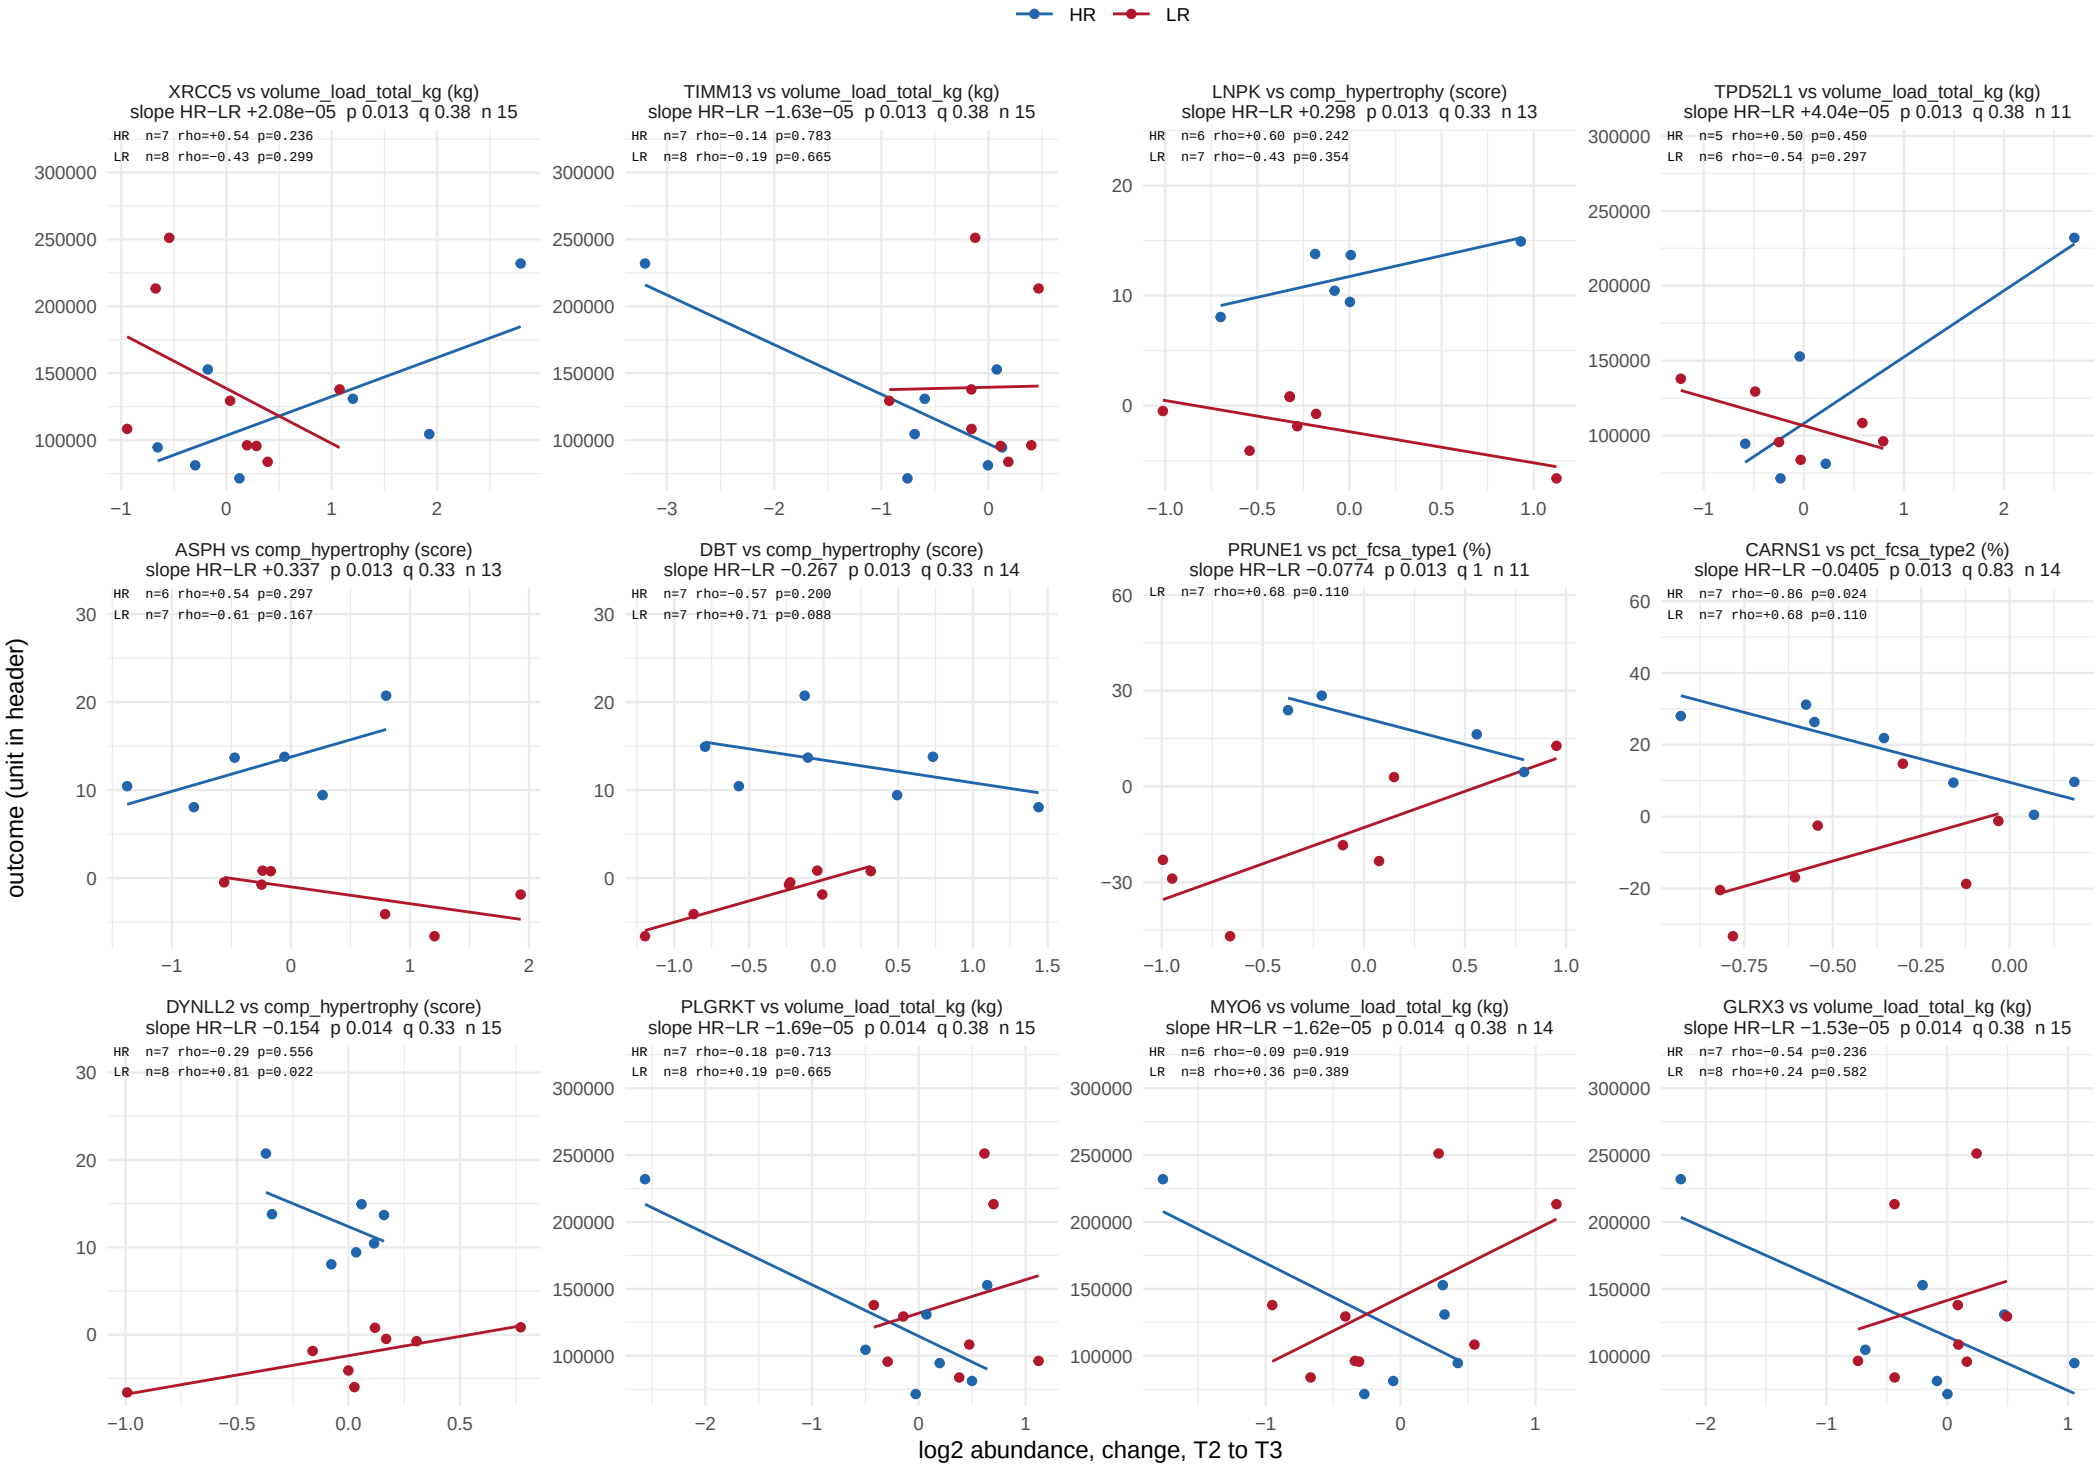

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


670 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 17 of 56.

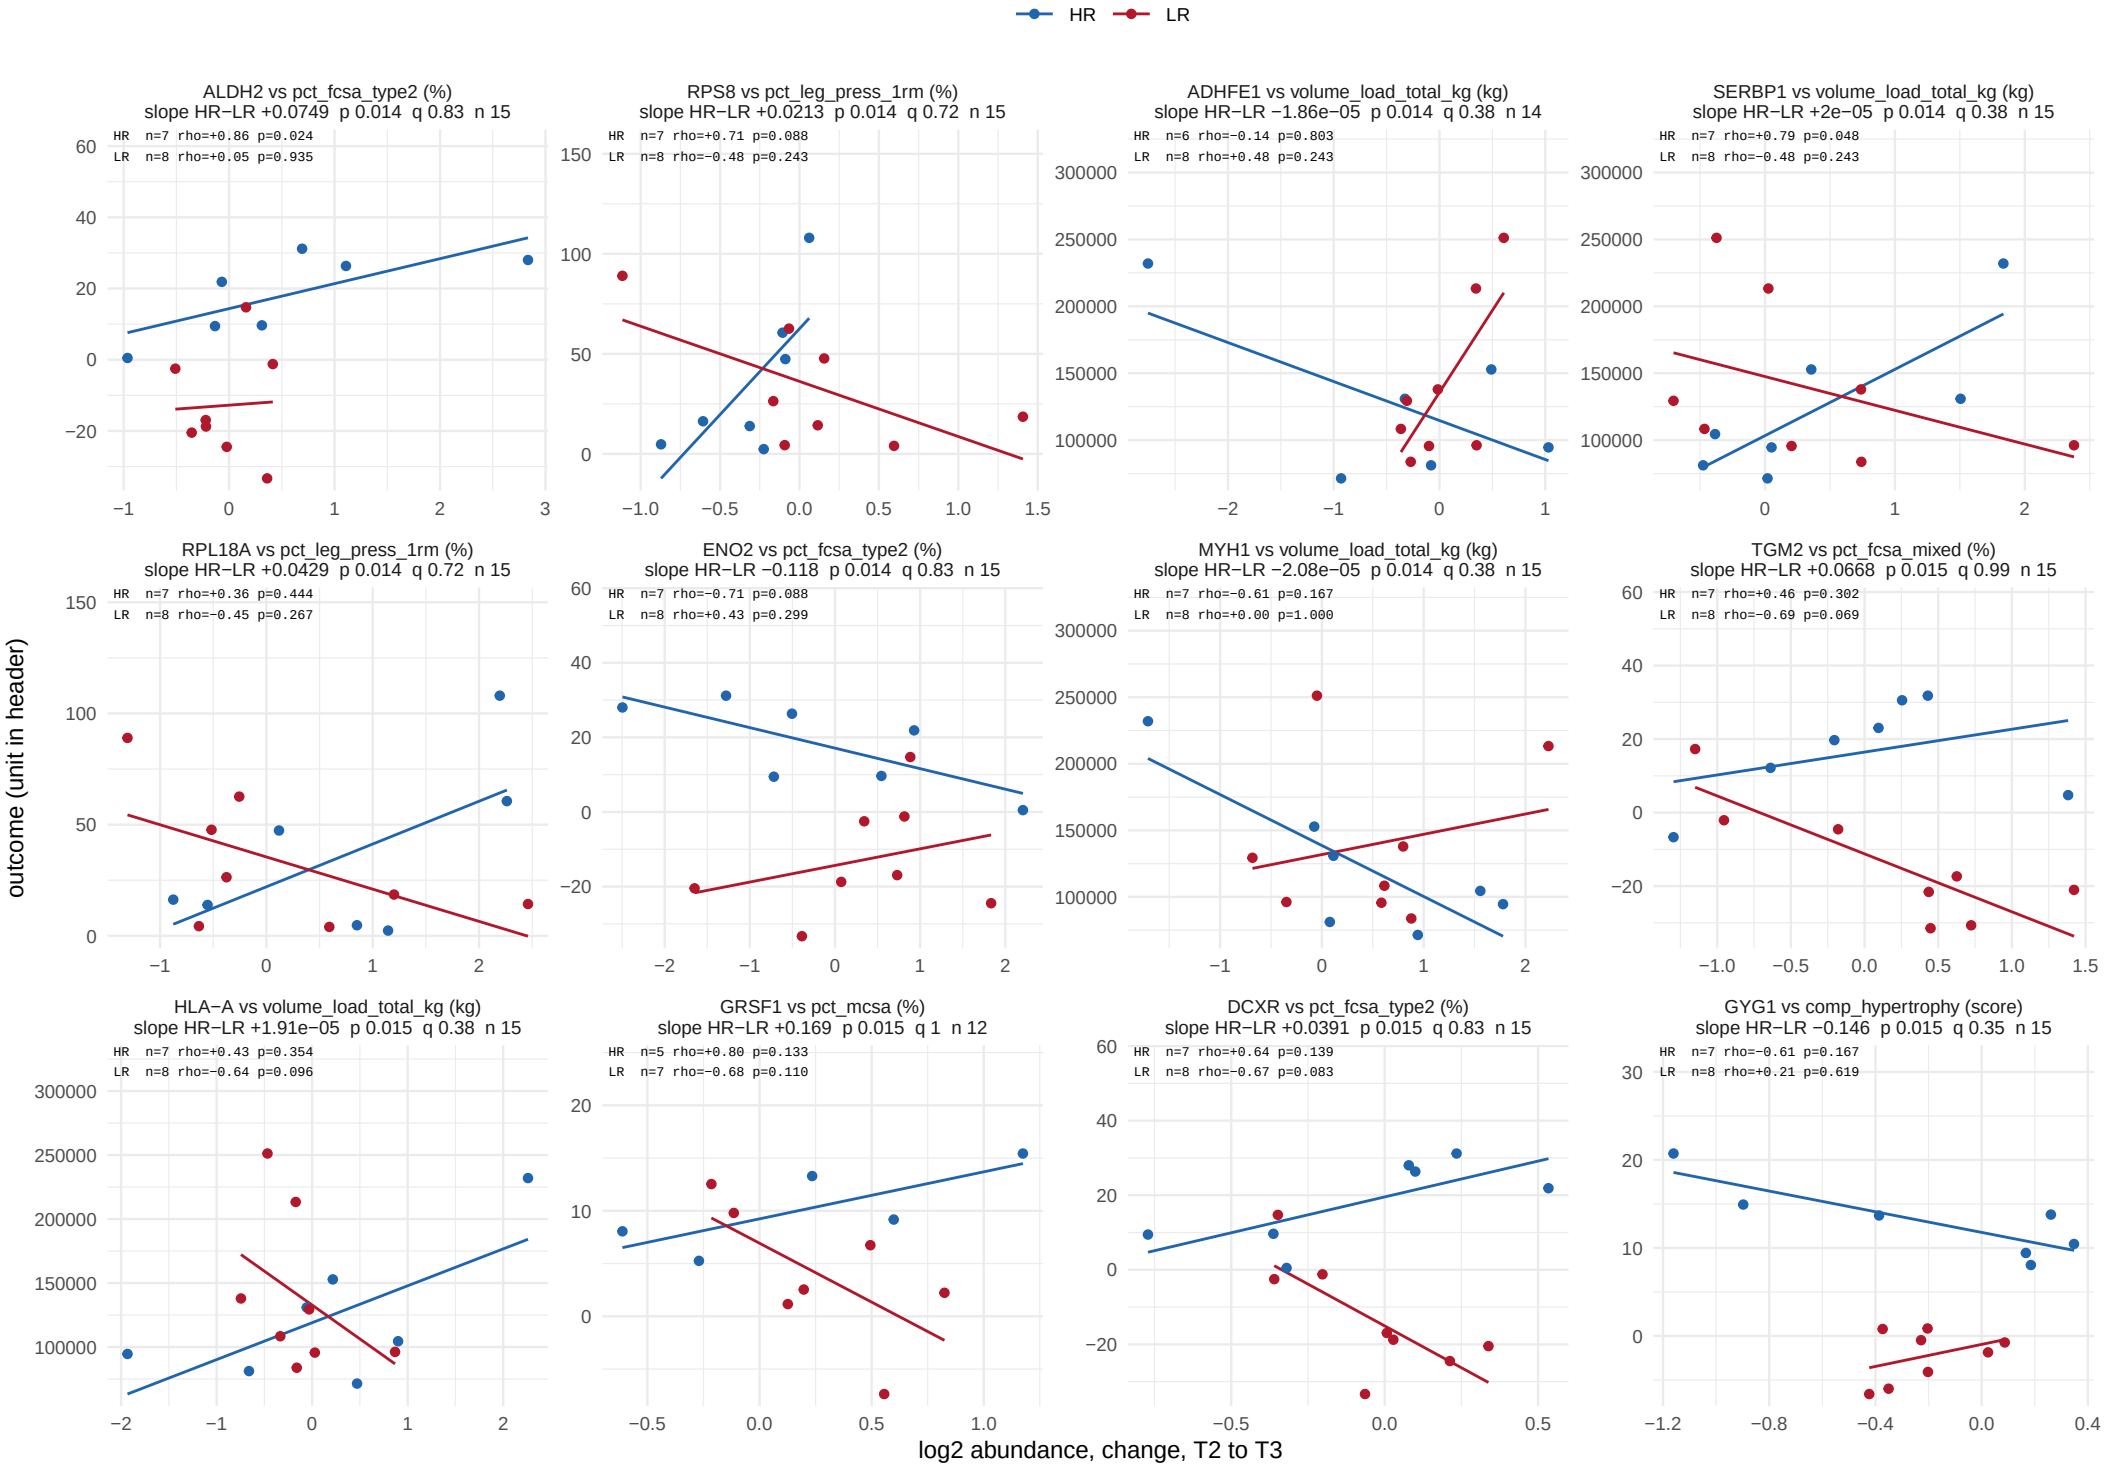

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


670 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 18 of 56.

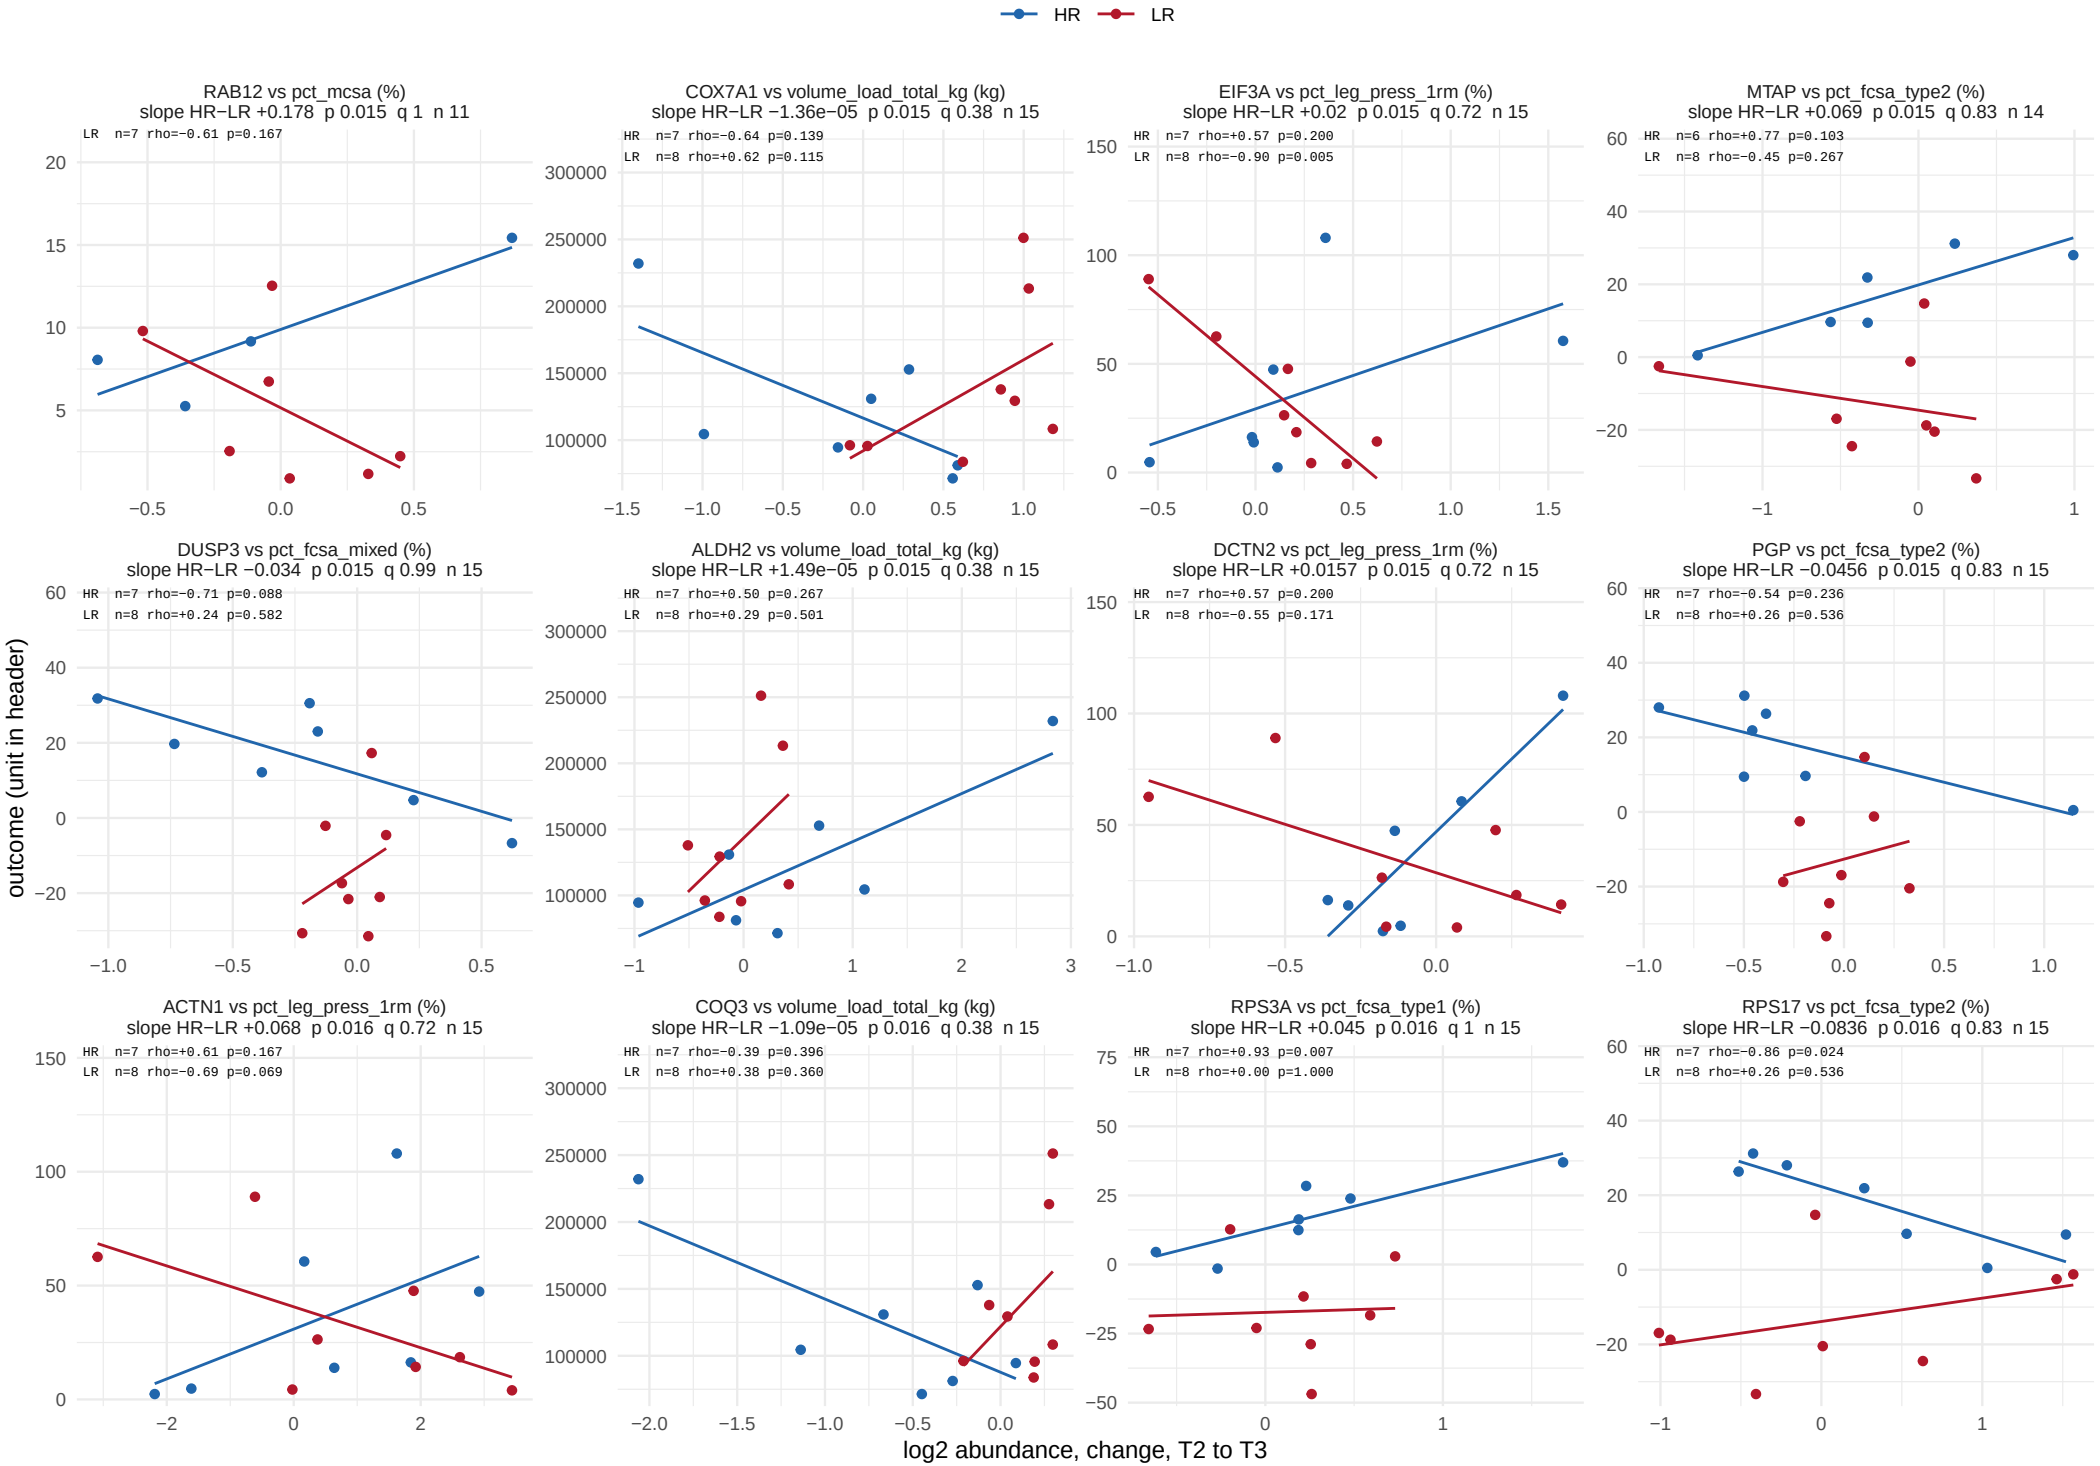

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


670 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 19 of 56.

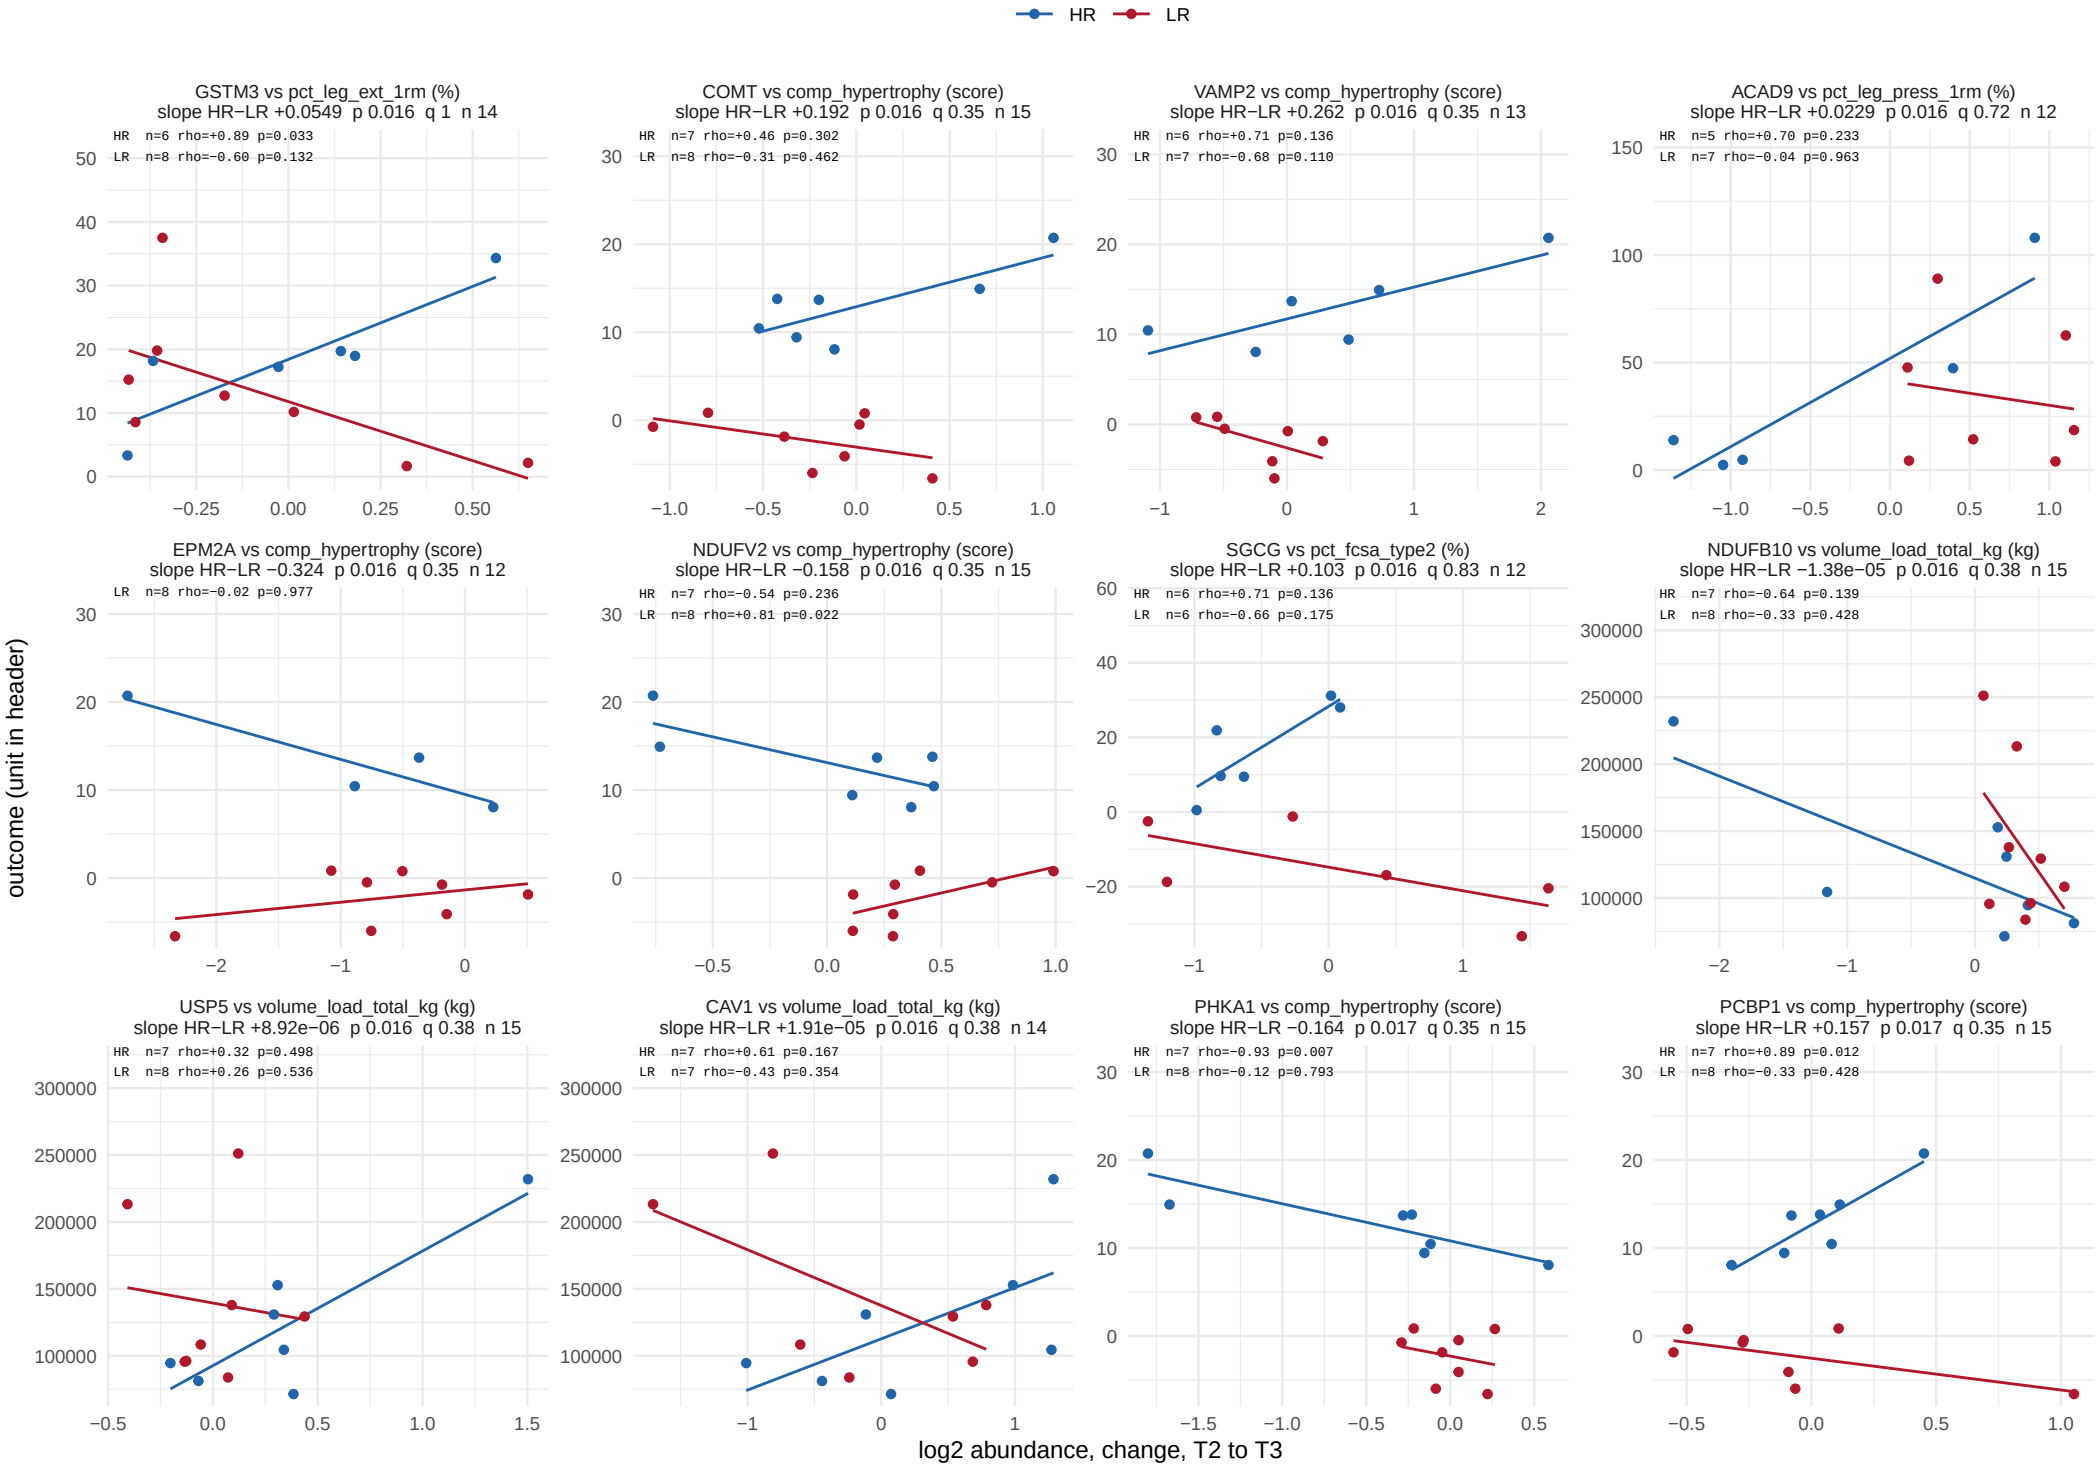

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window

670 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 20 of 56.

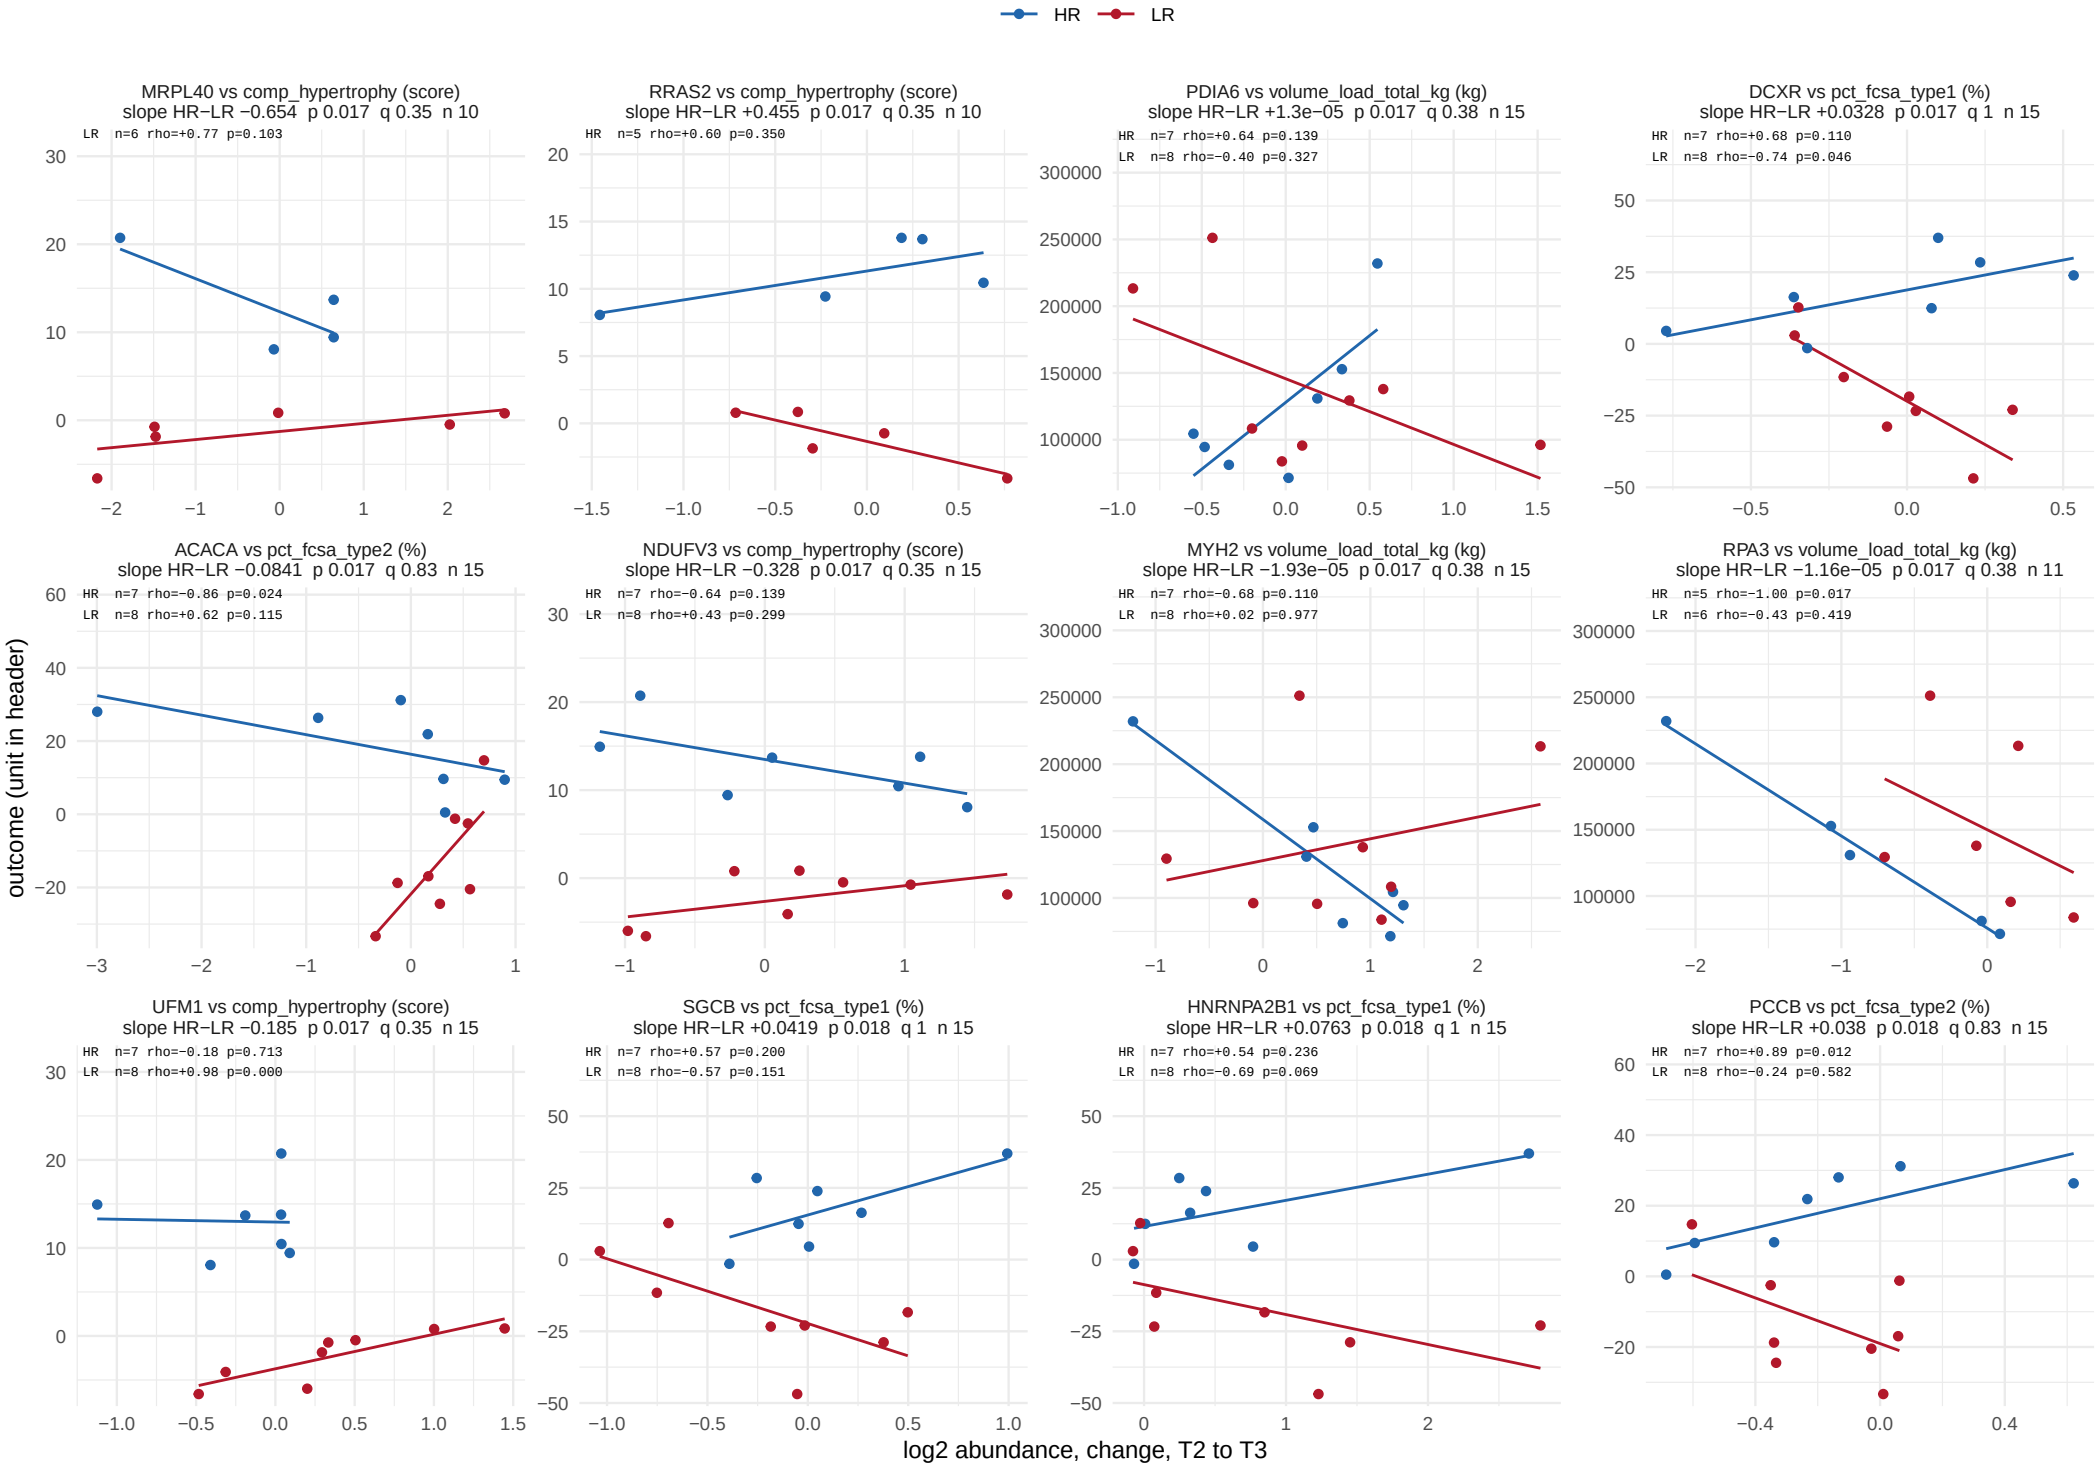

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


670 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 21 of 56.



One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


670 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 22 of 56.

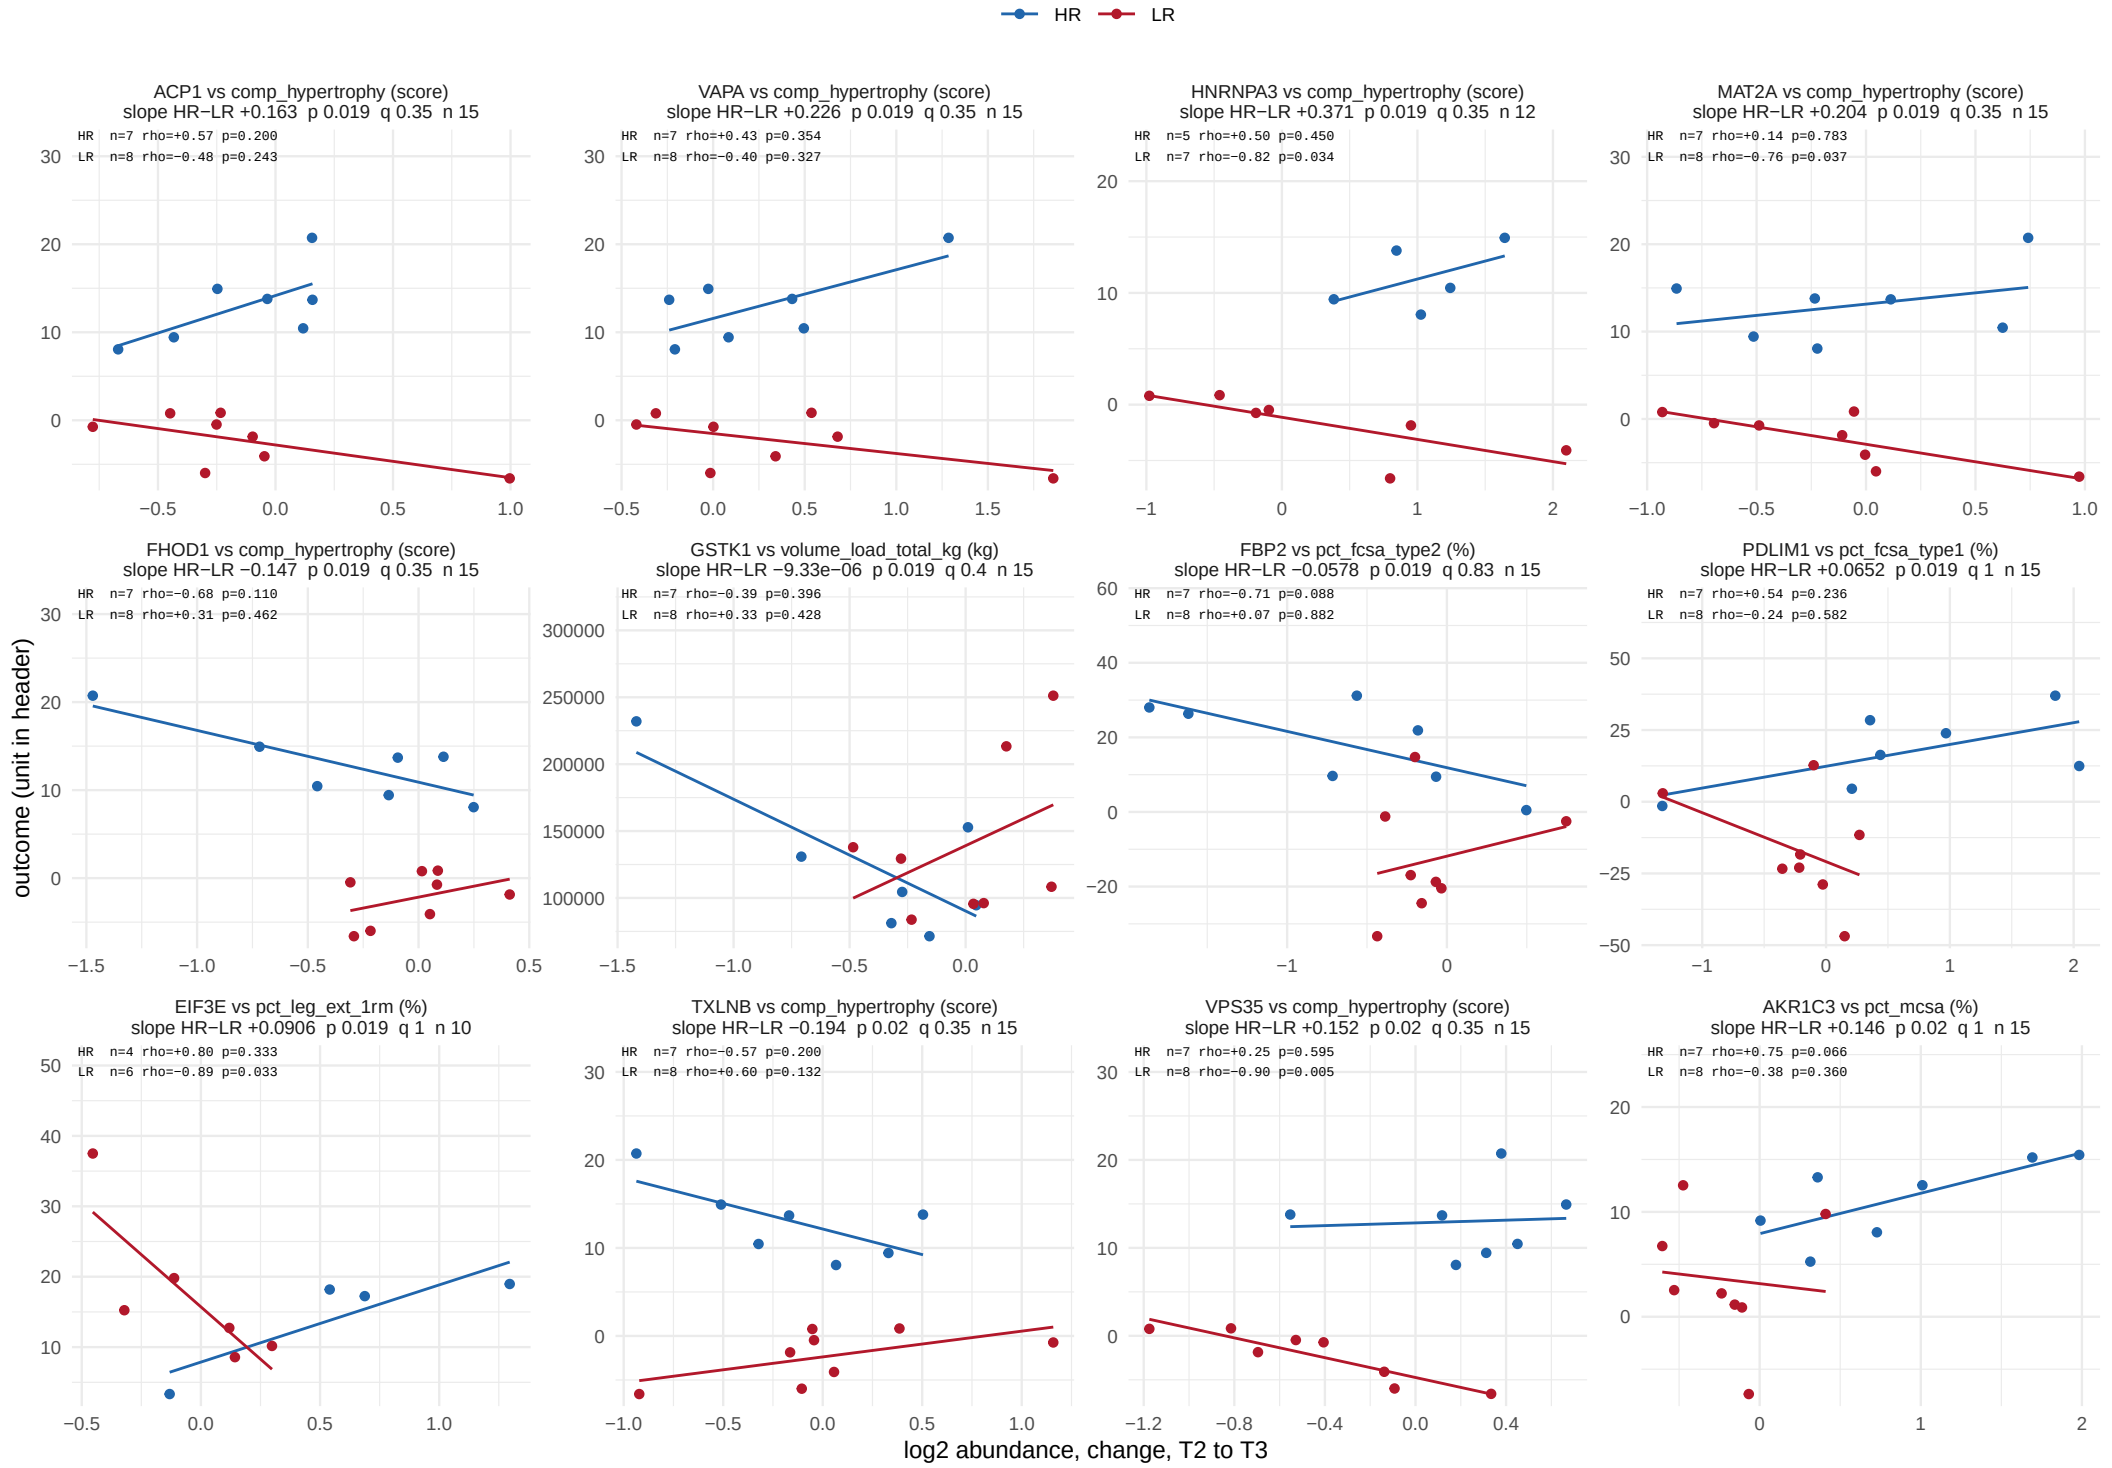

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


670 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 23 of 56.

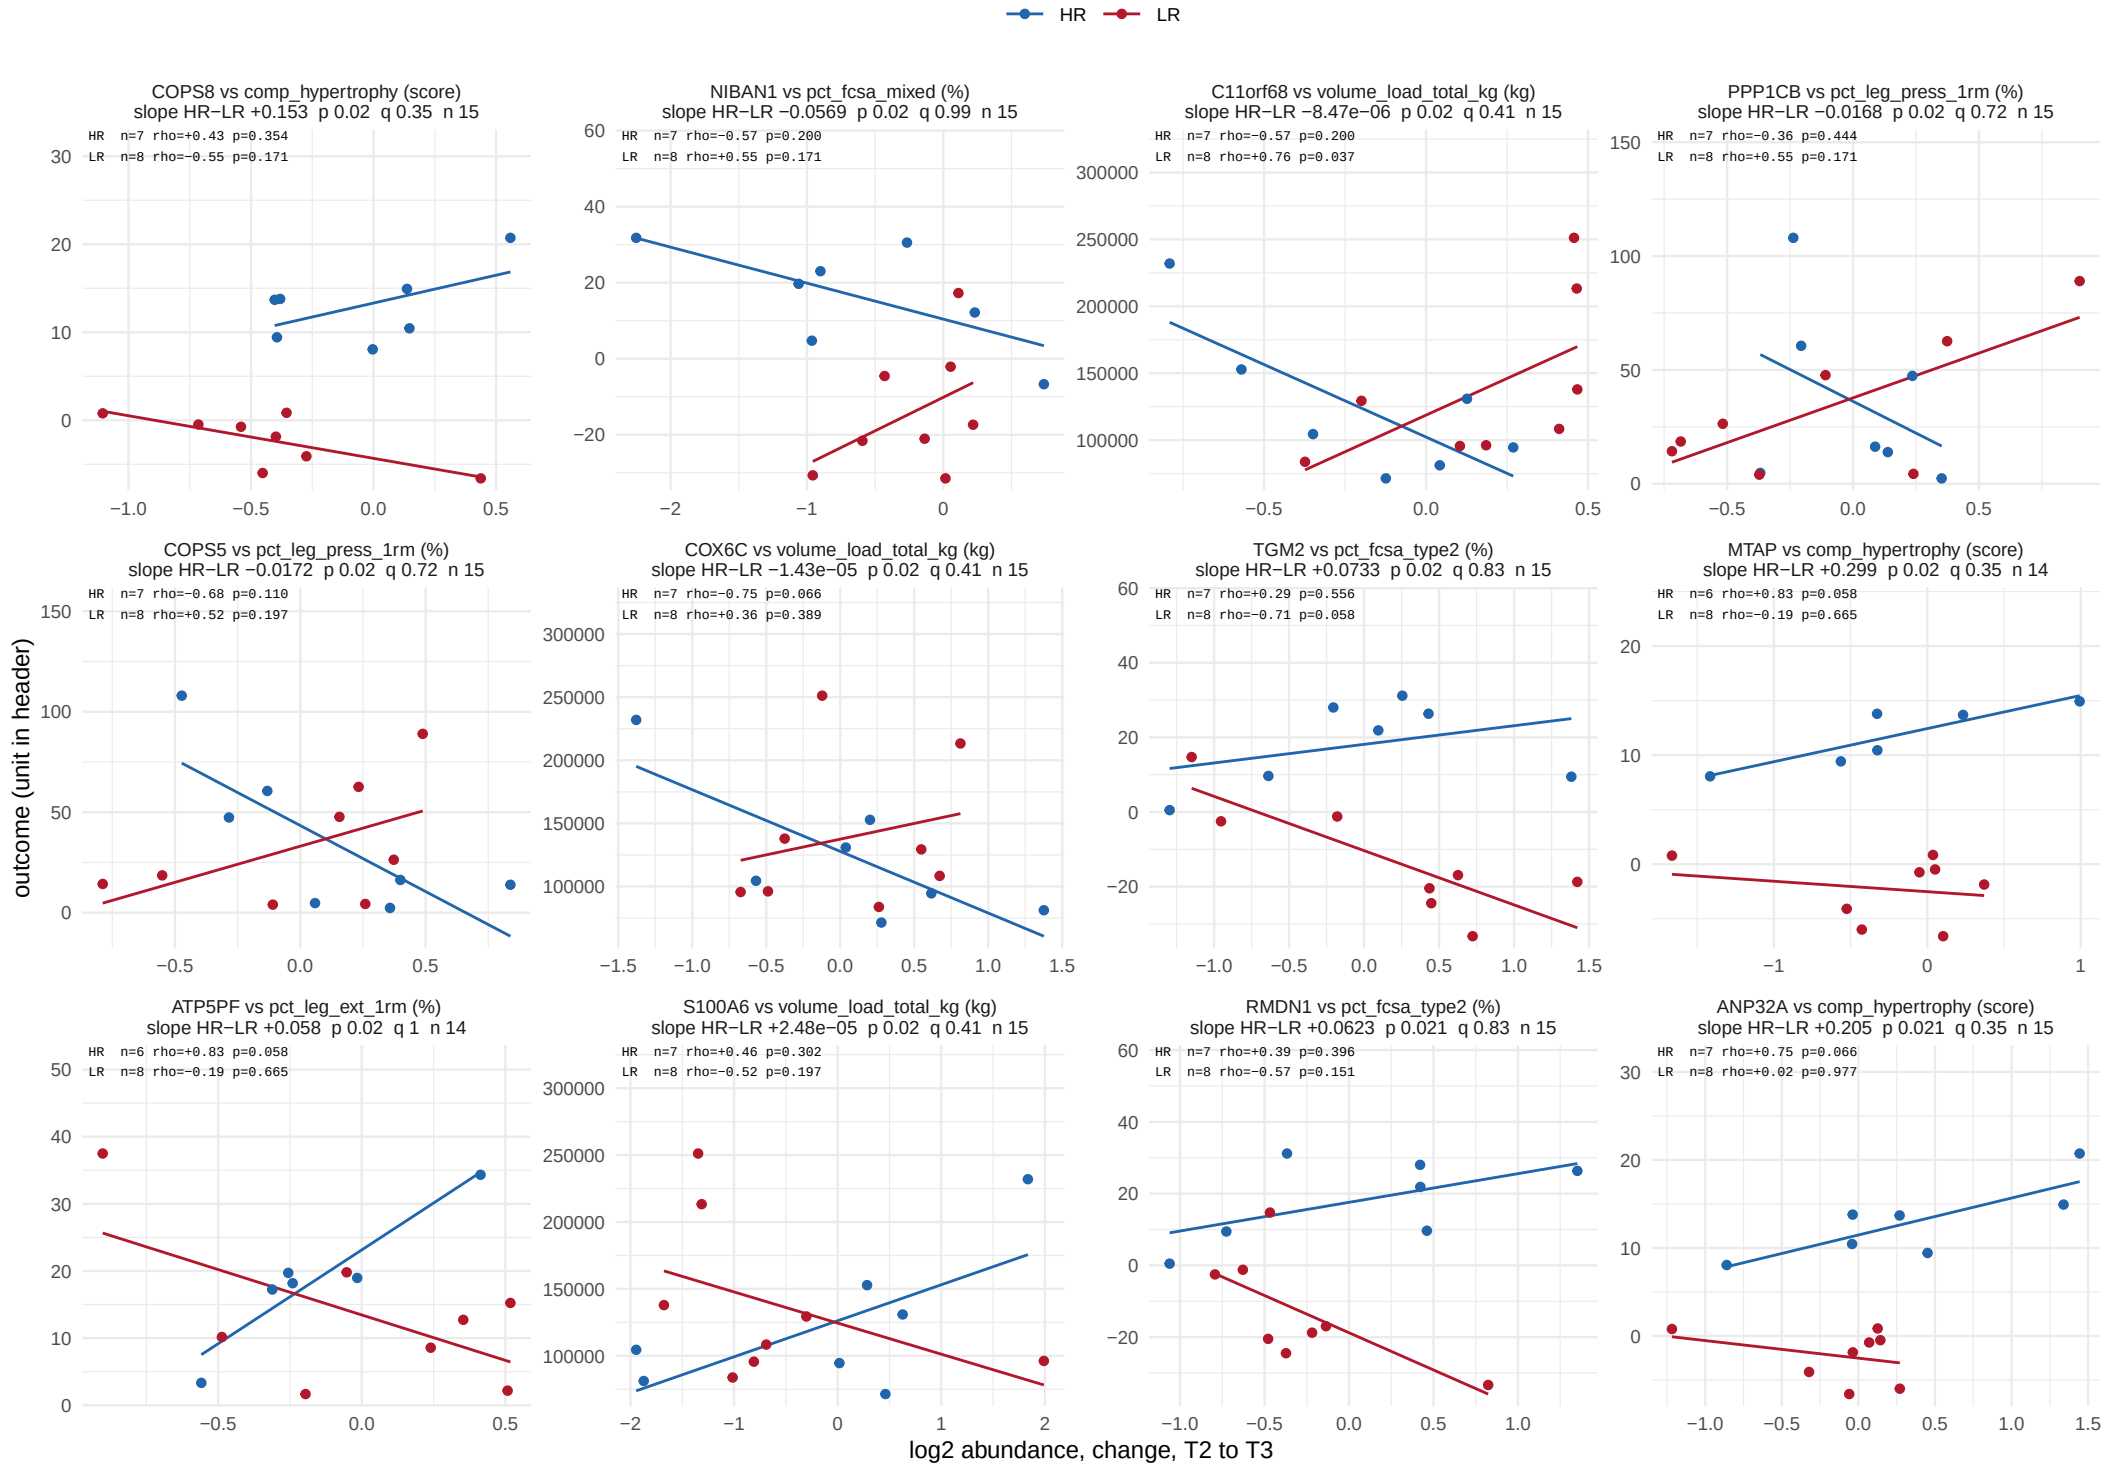

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


670 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 24 of 56.

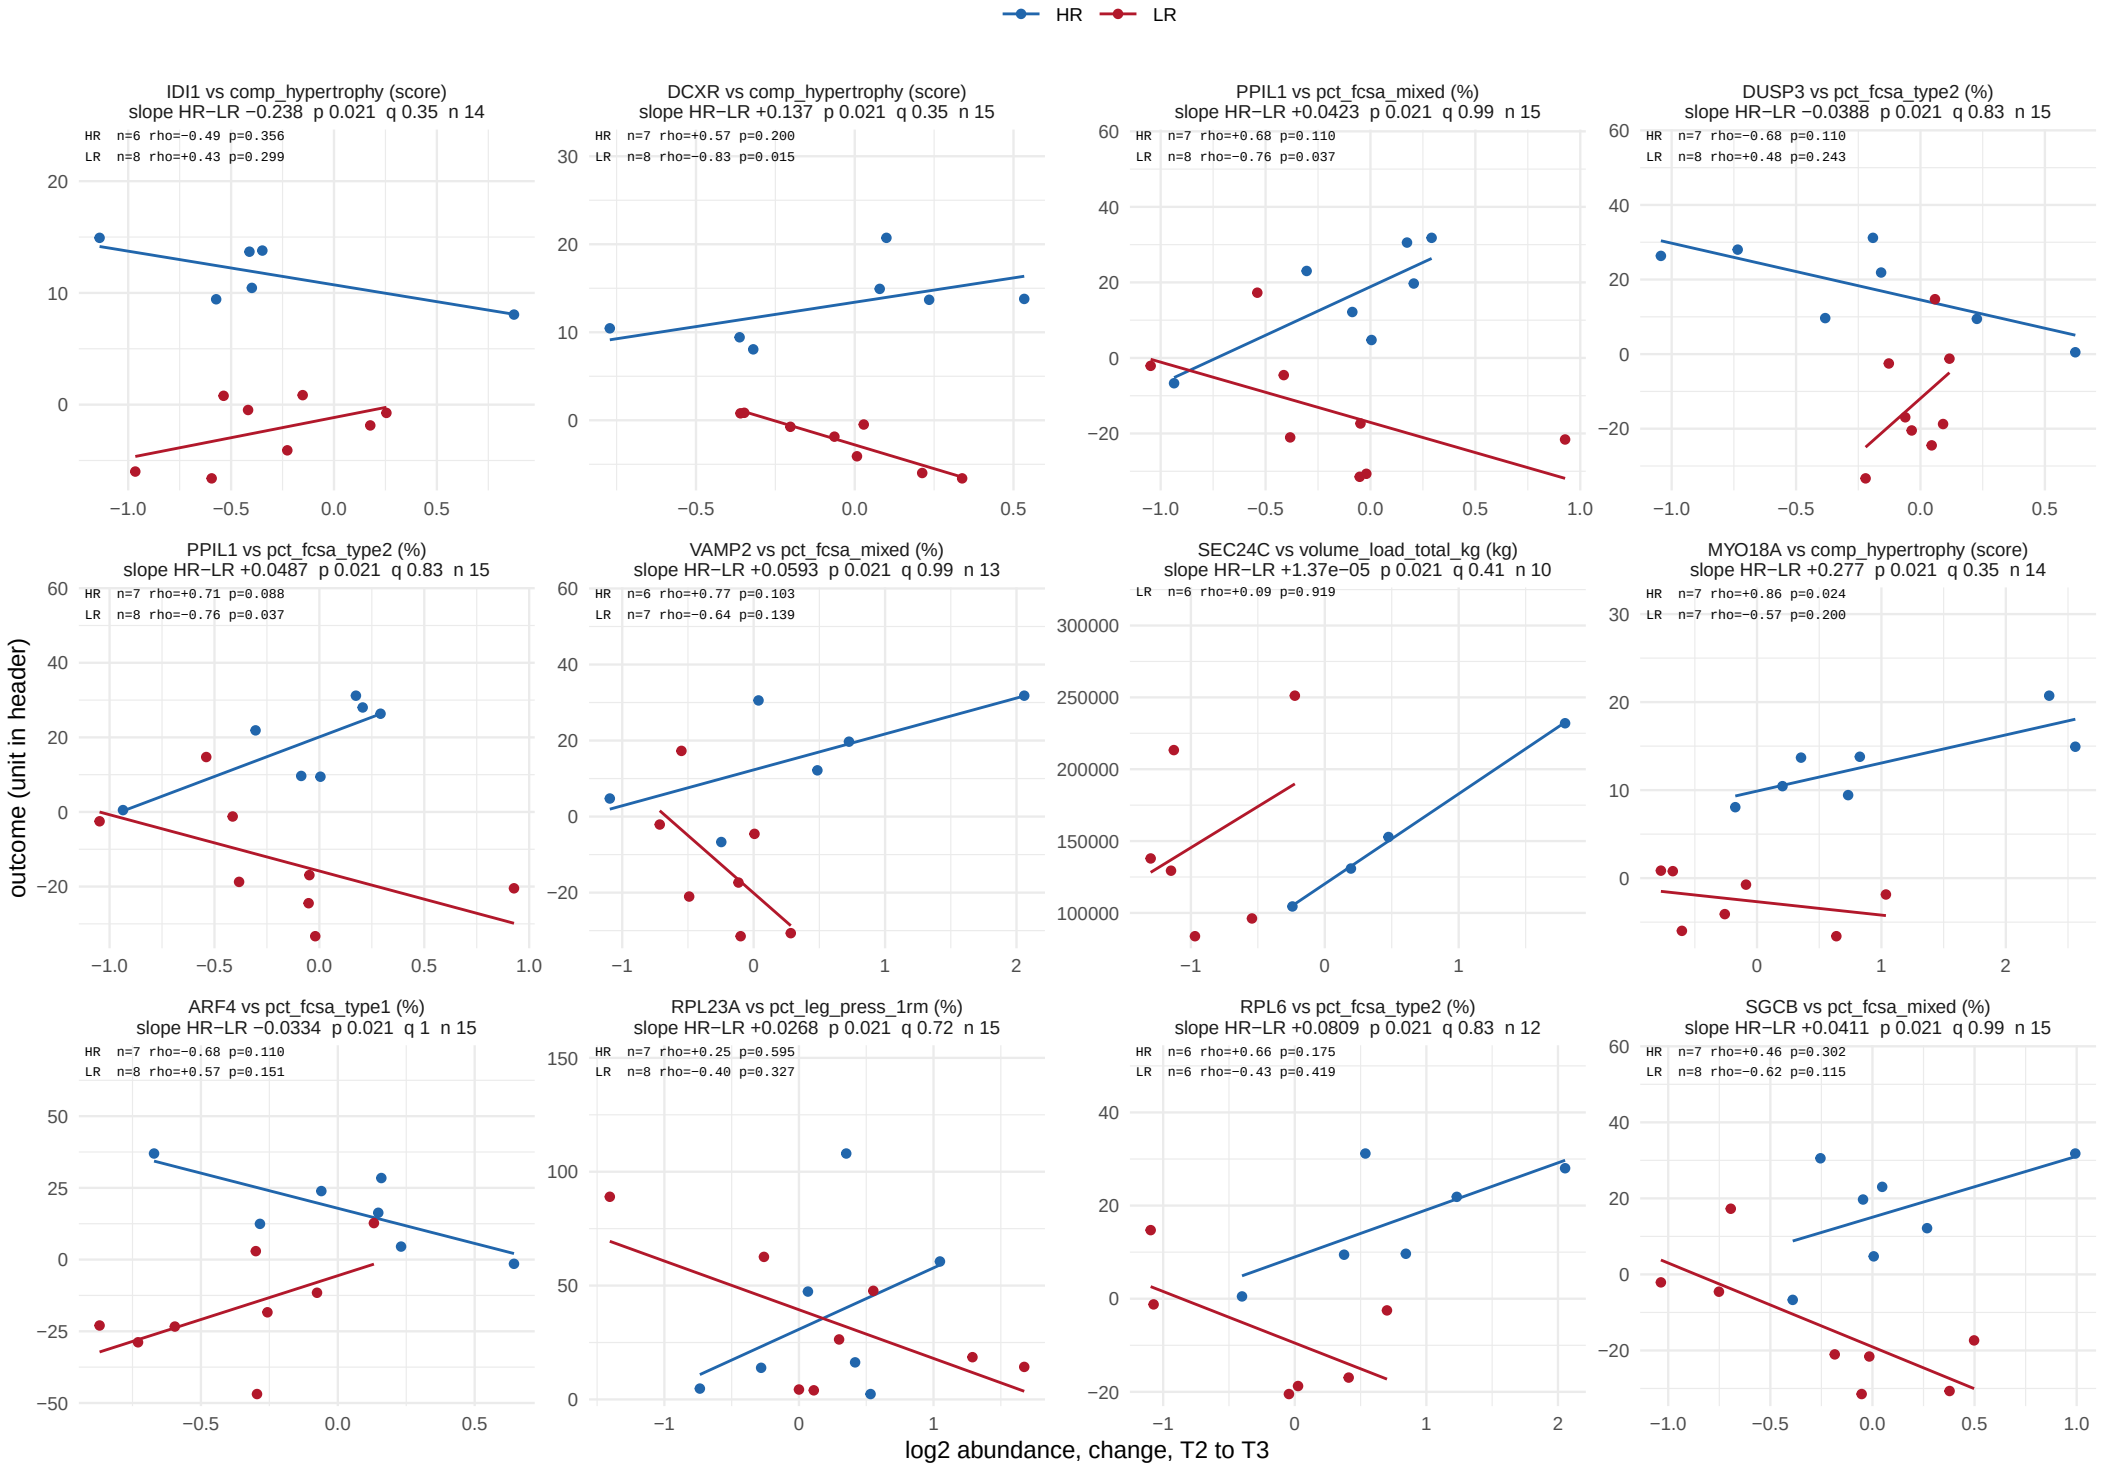

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


670 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 25 of 56.

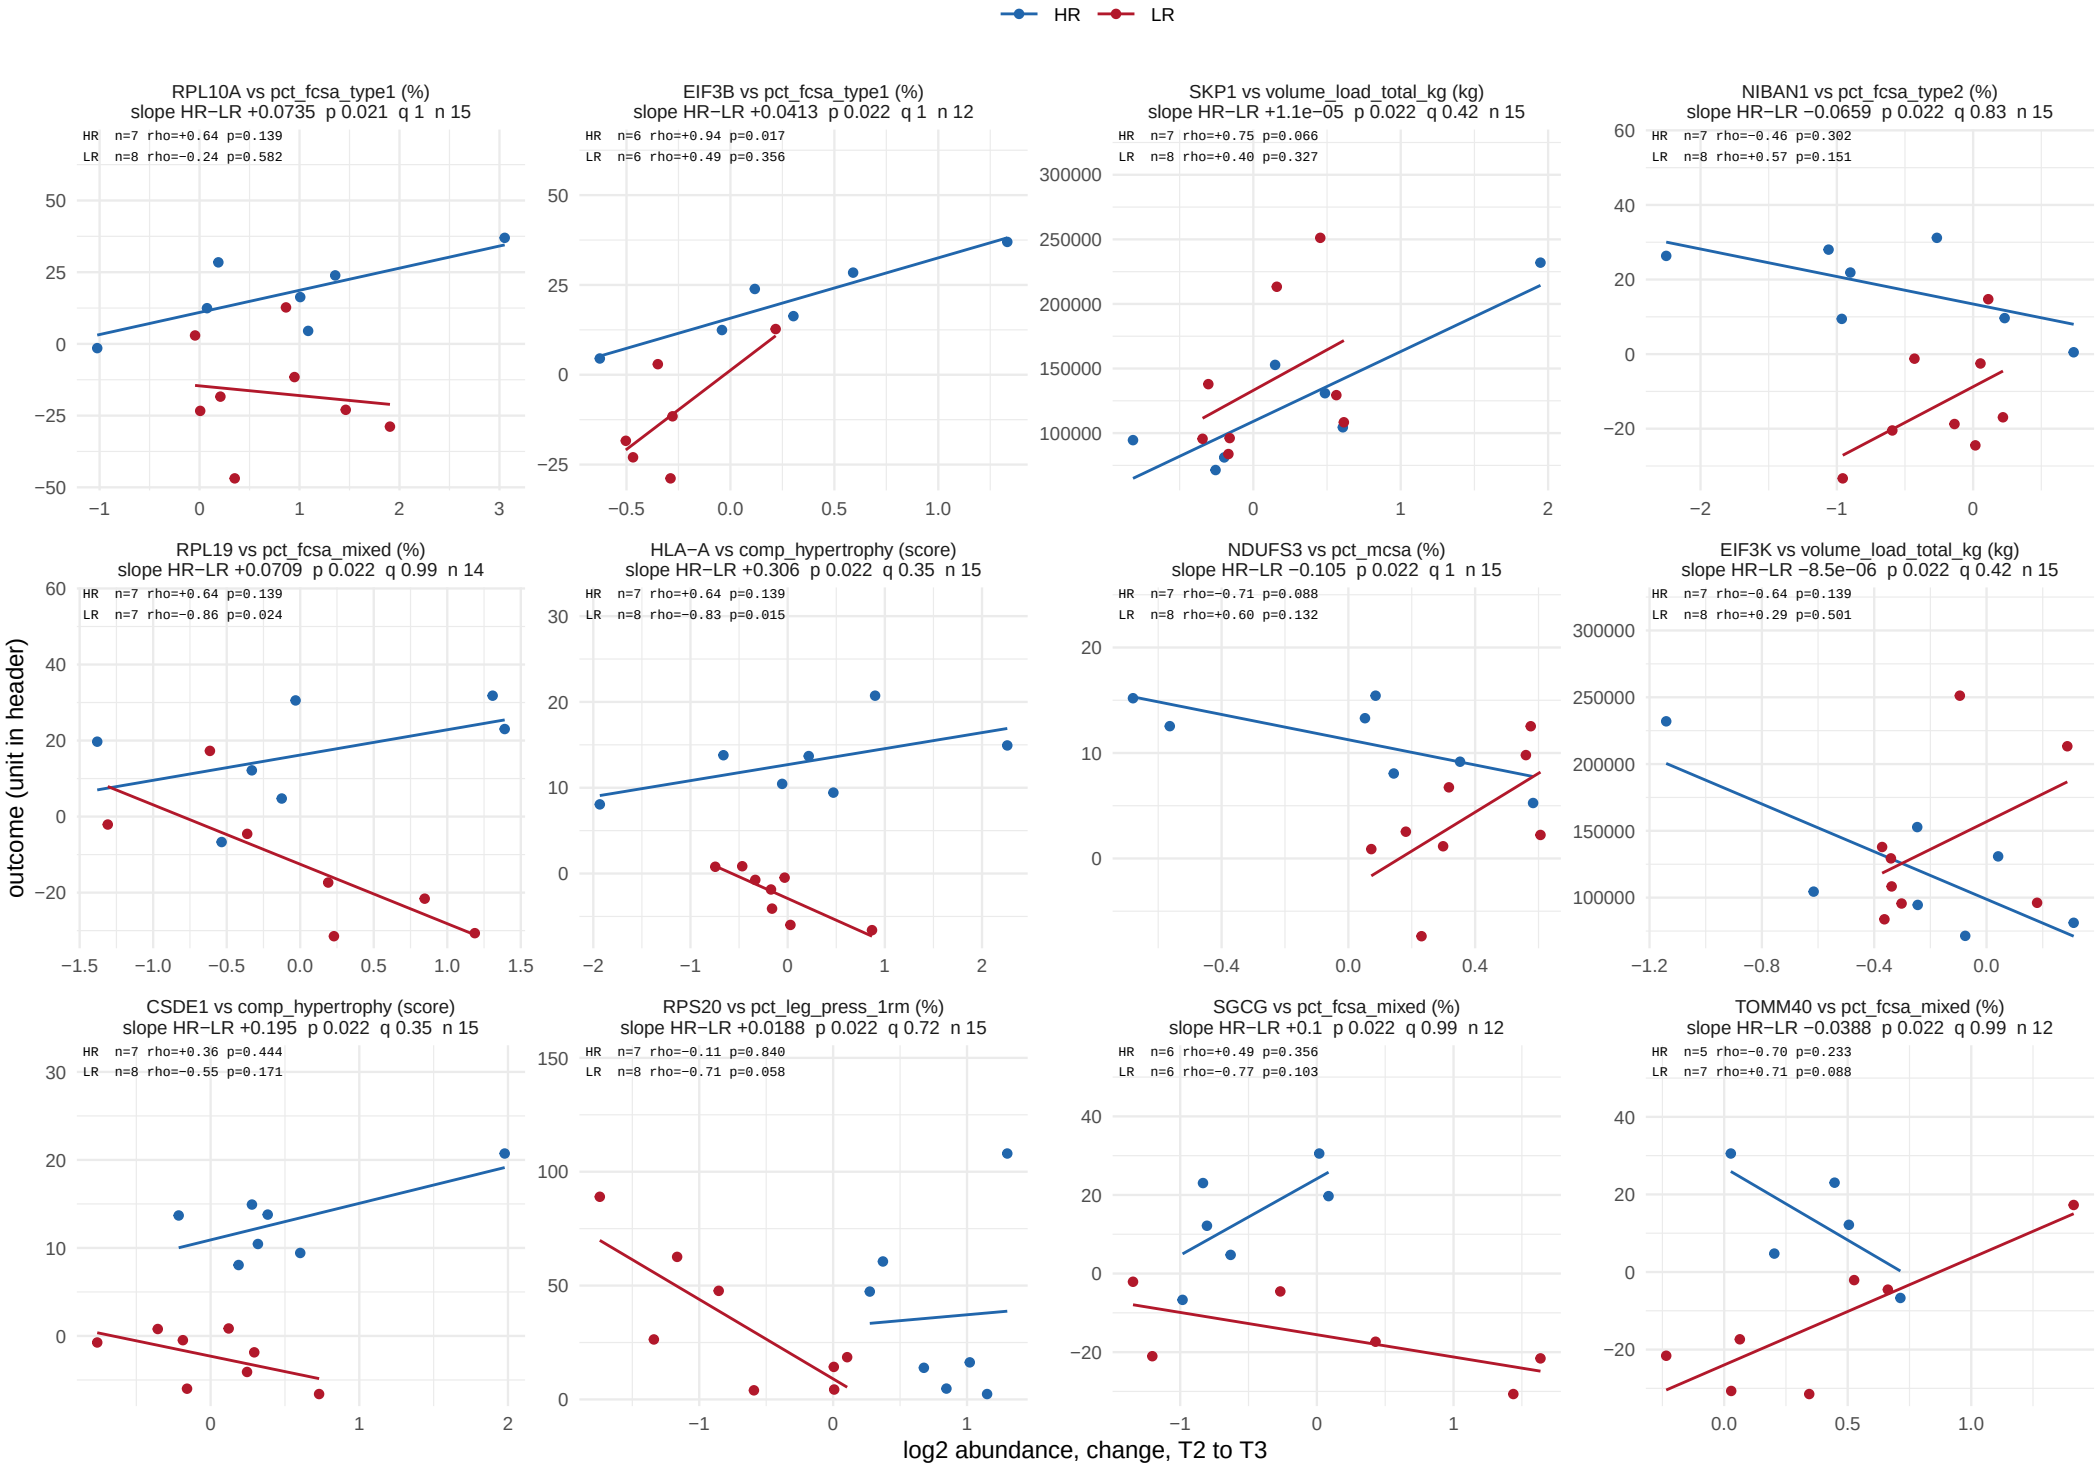

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


670 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 26 of 56.

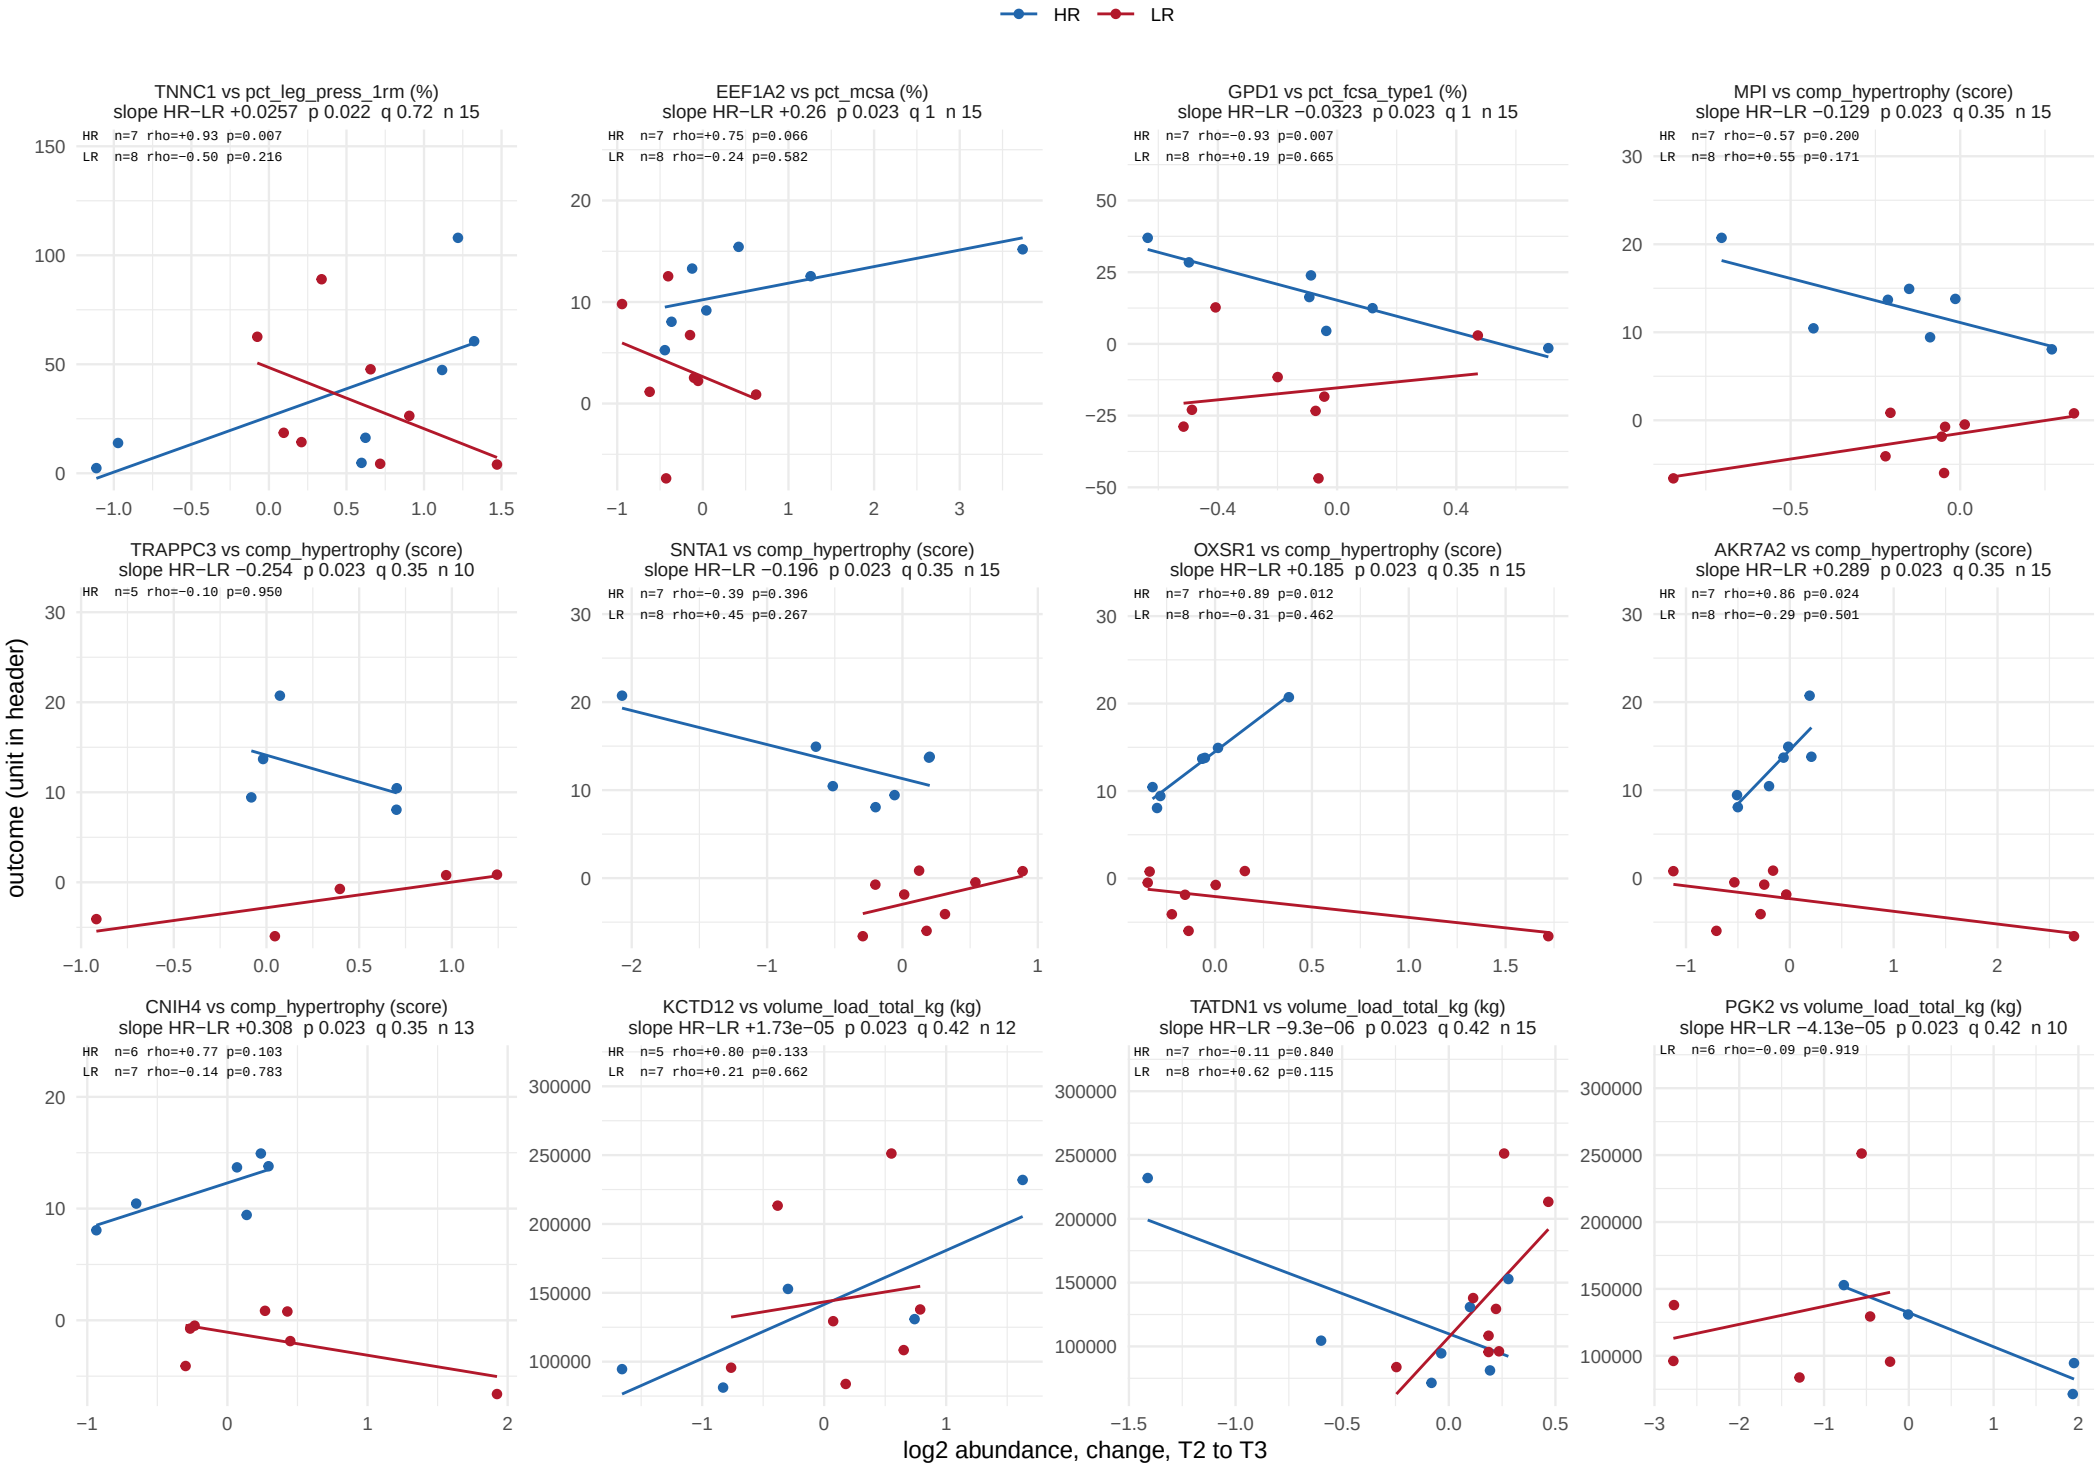

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


670 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 27 of 56.

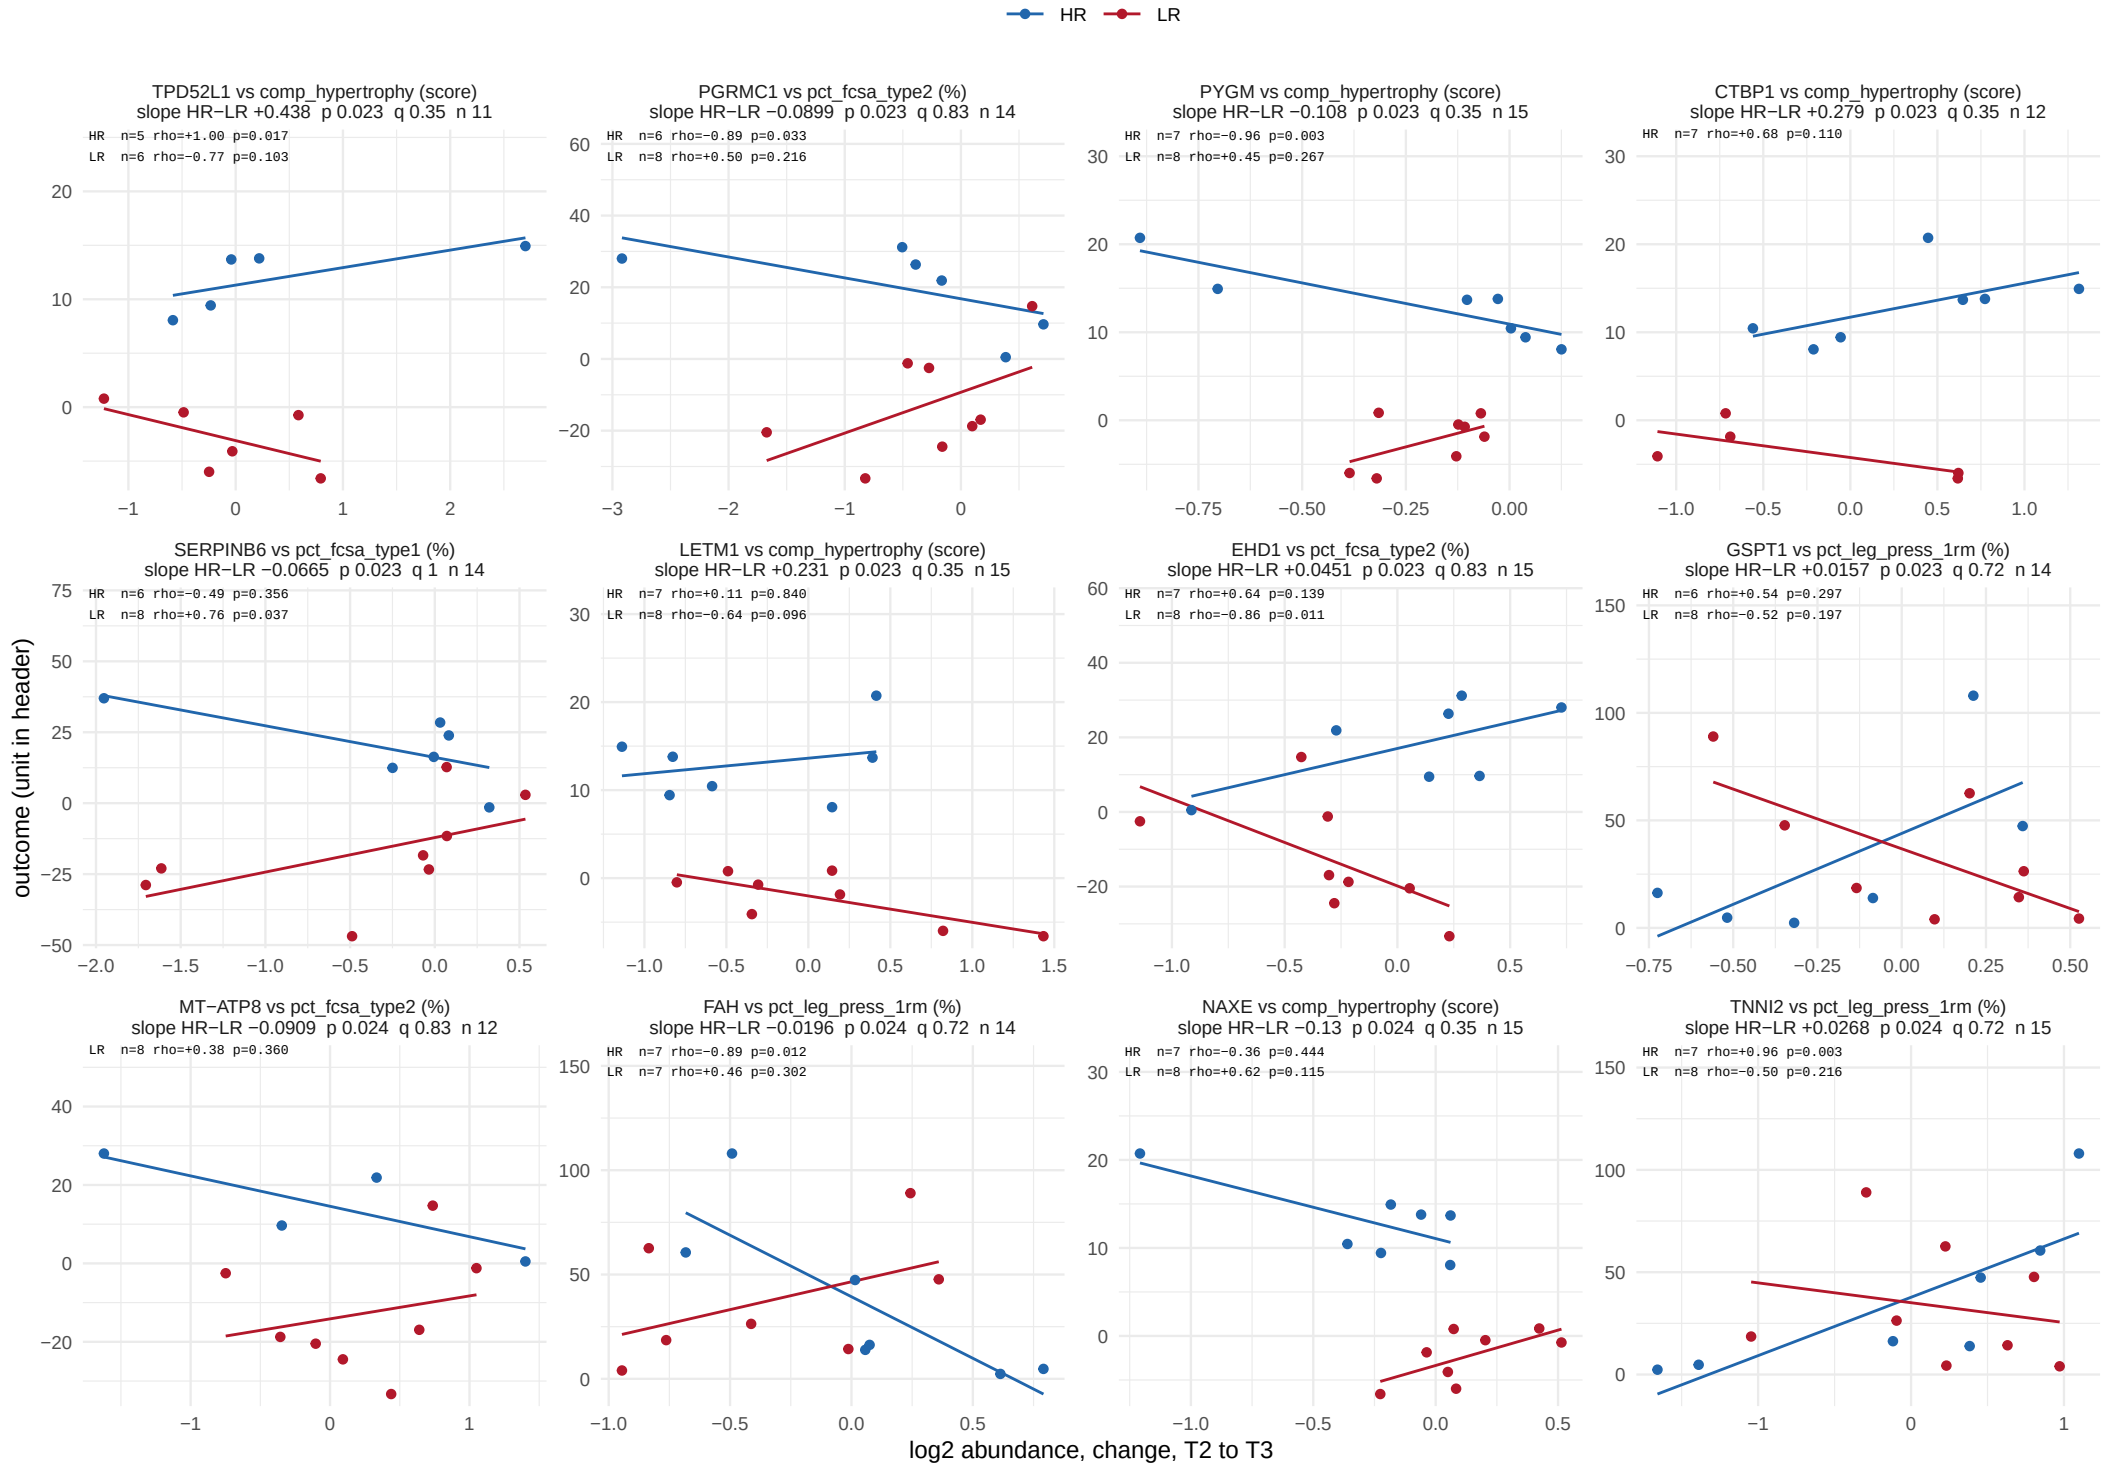

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


670 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 28 of 56.

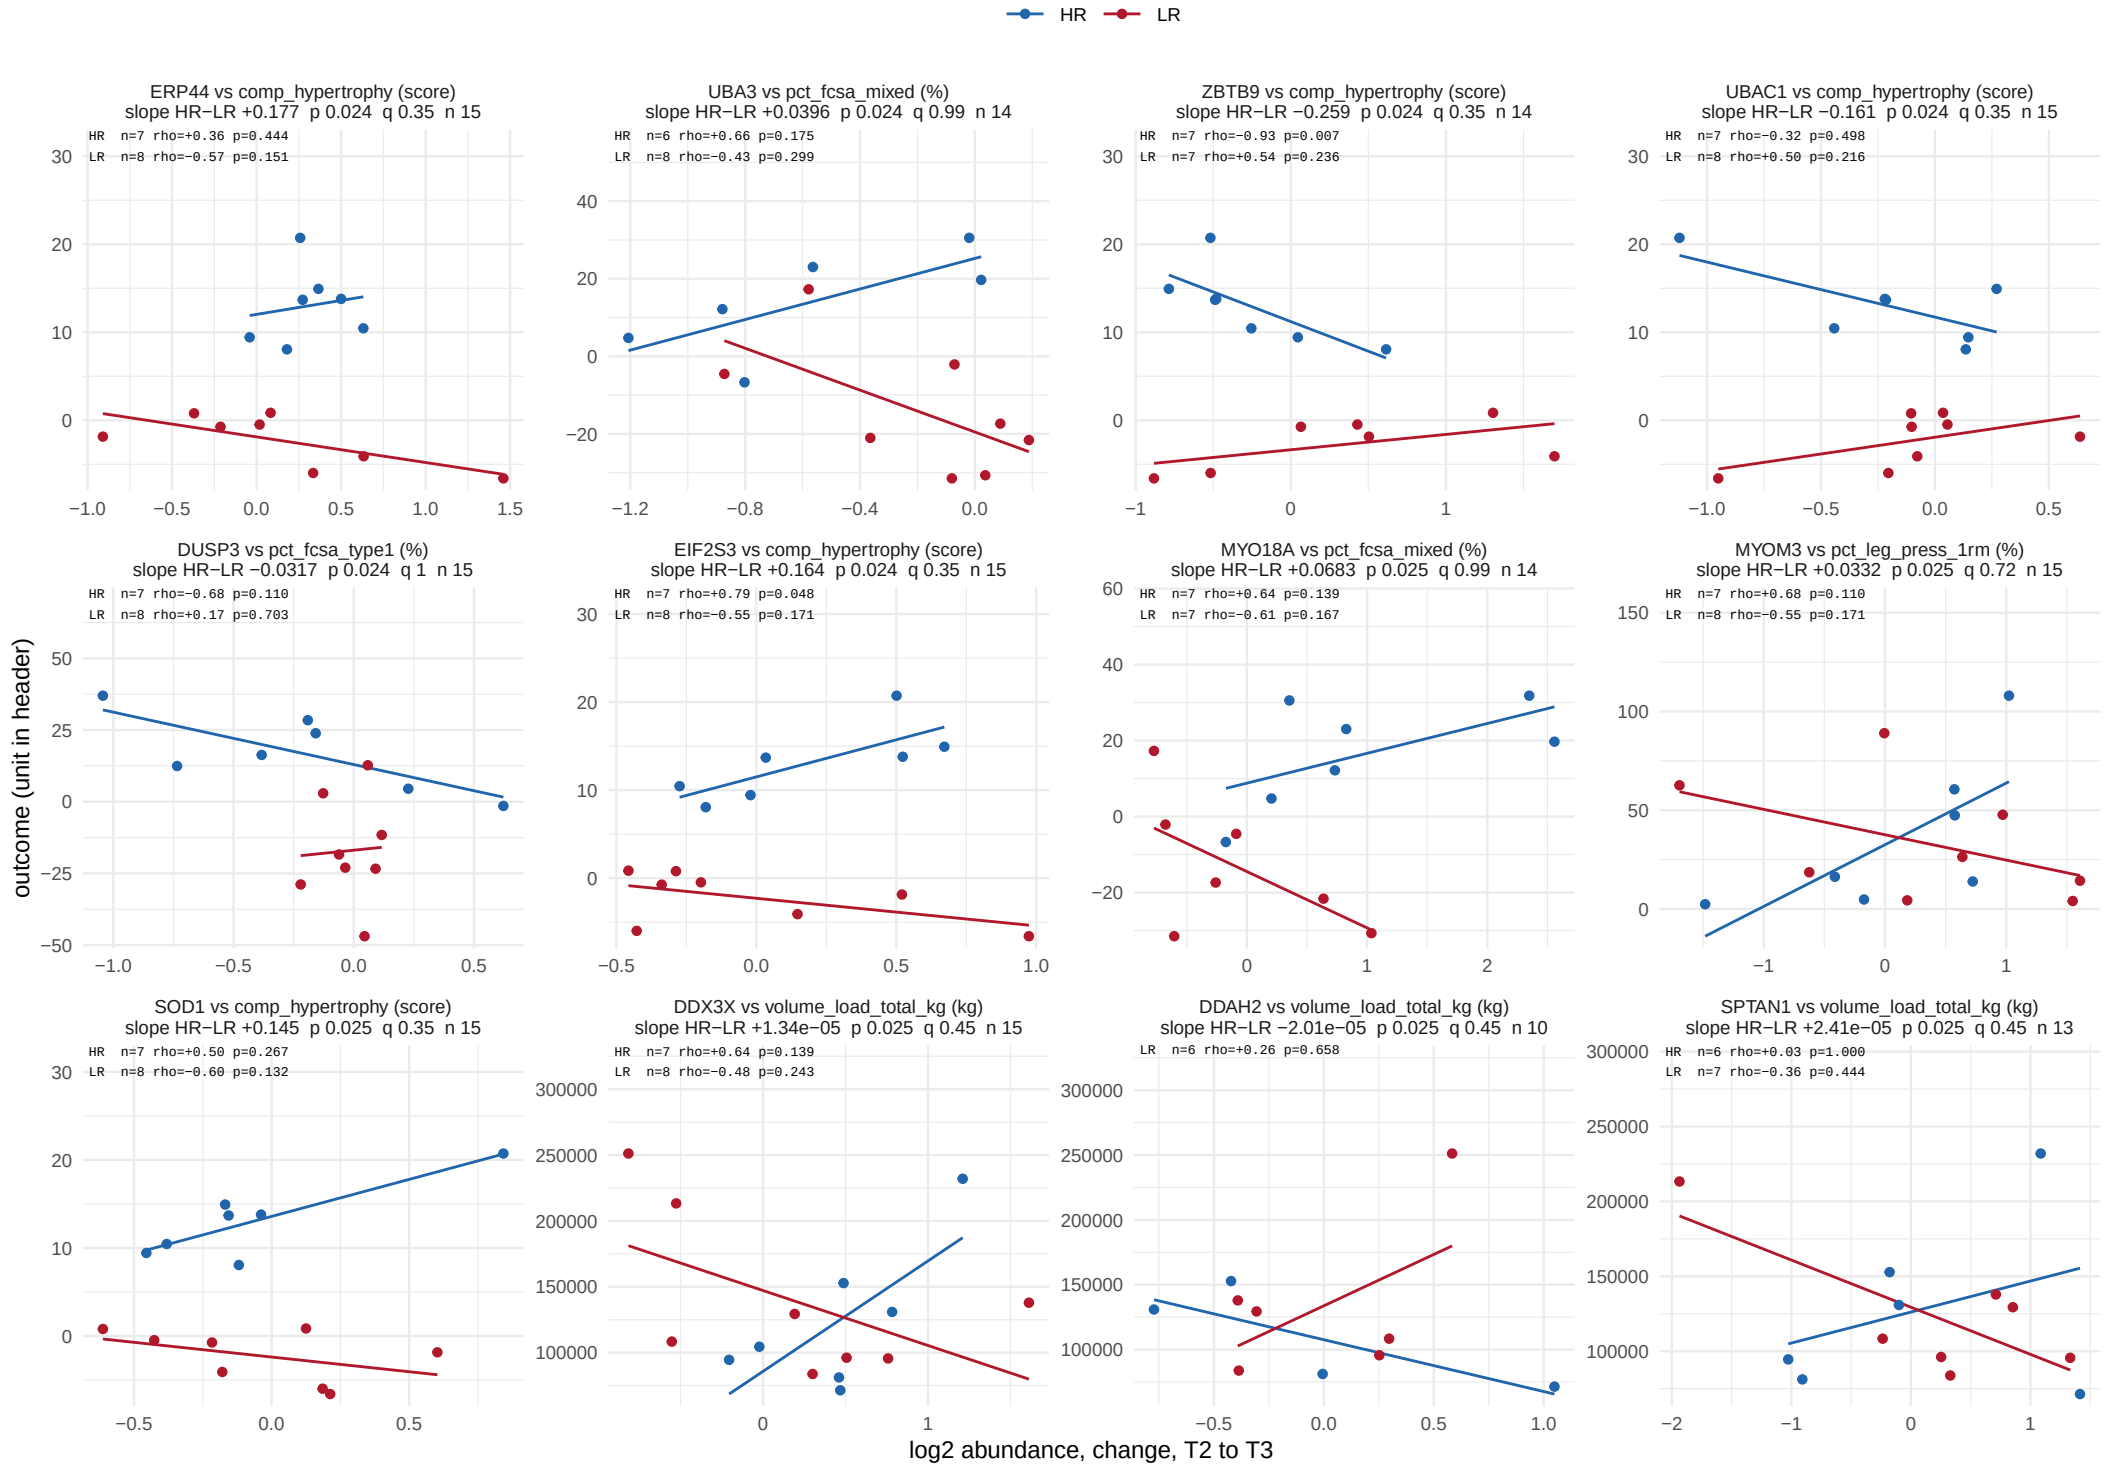

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


670 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 29 of 56.

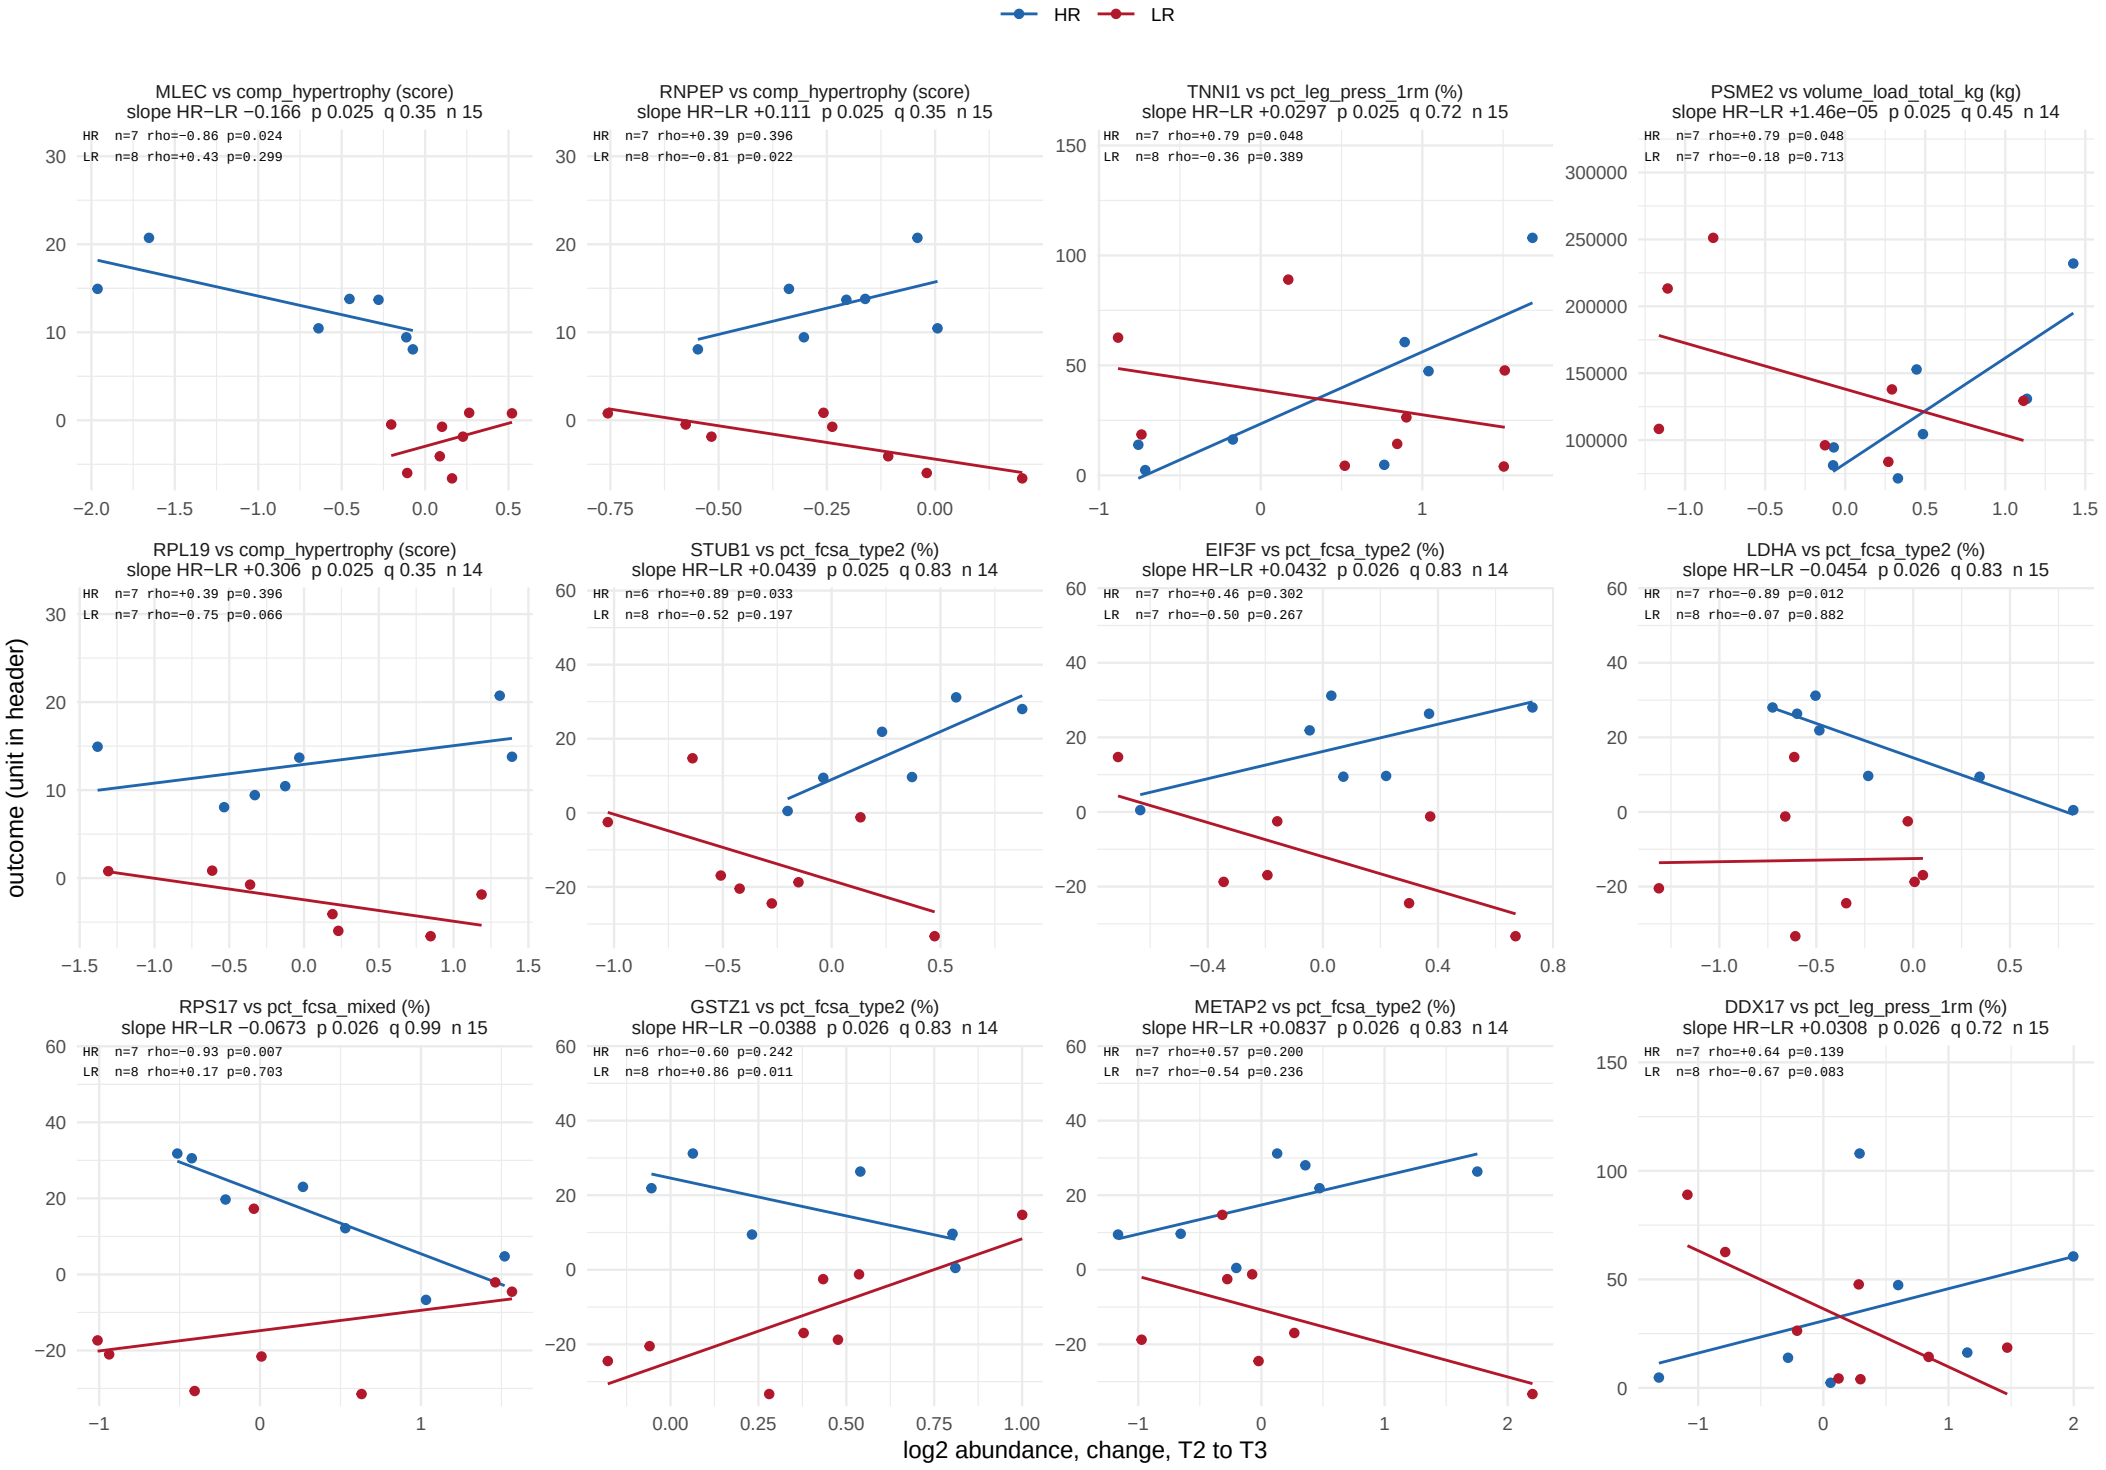

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


670 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 30 of 56.

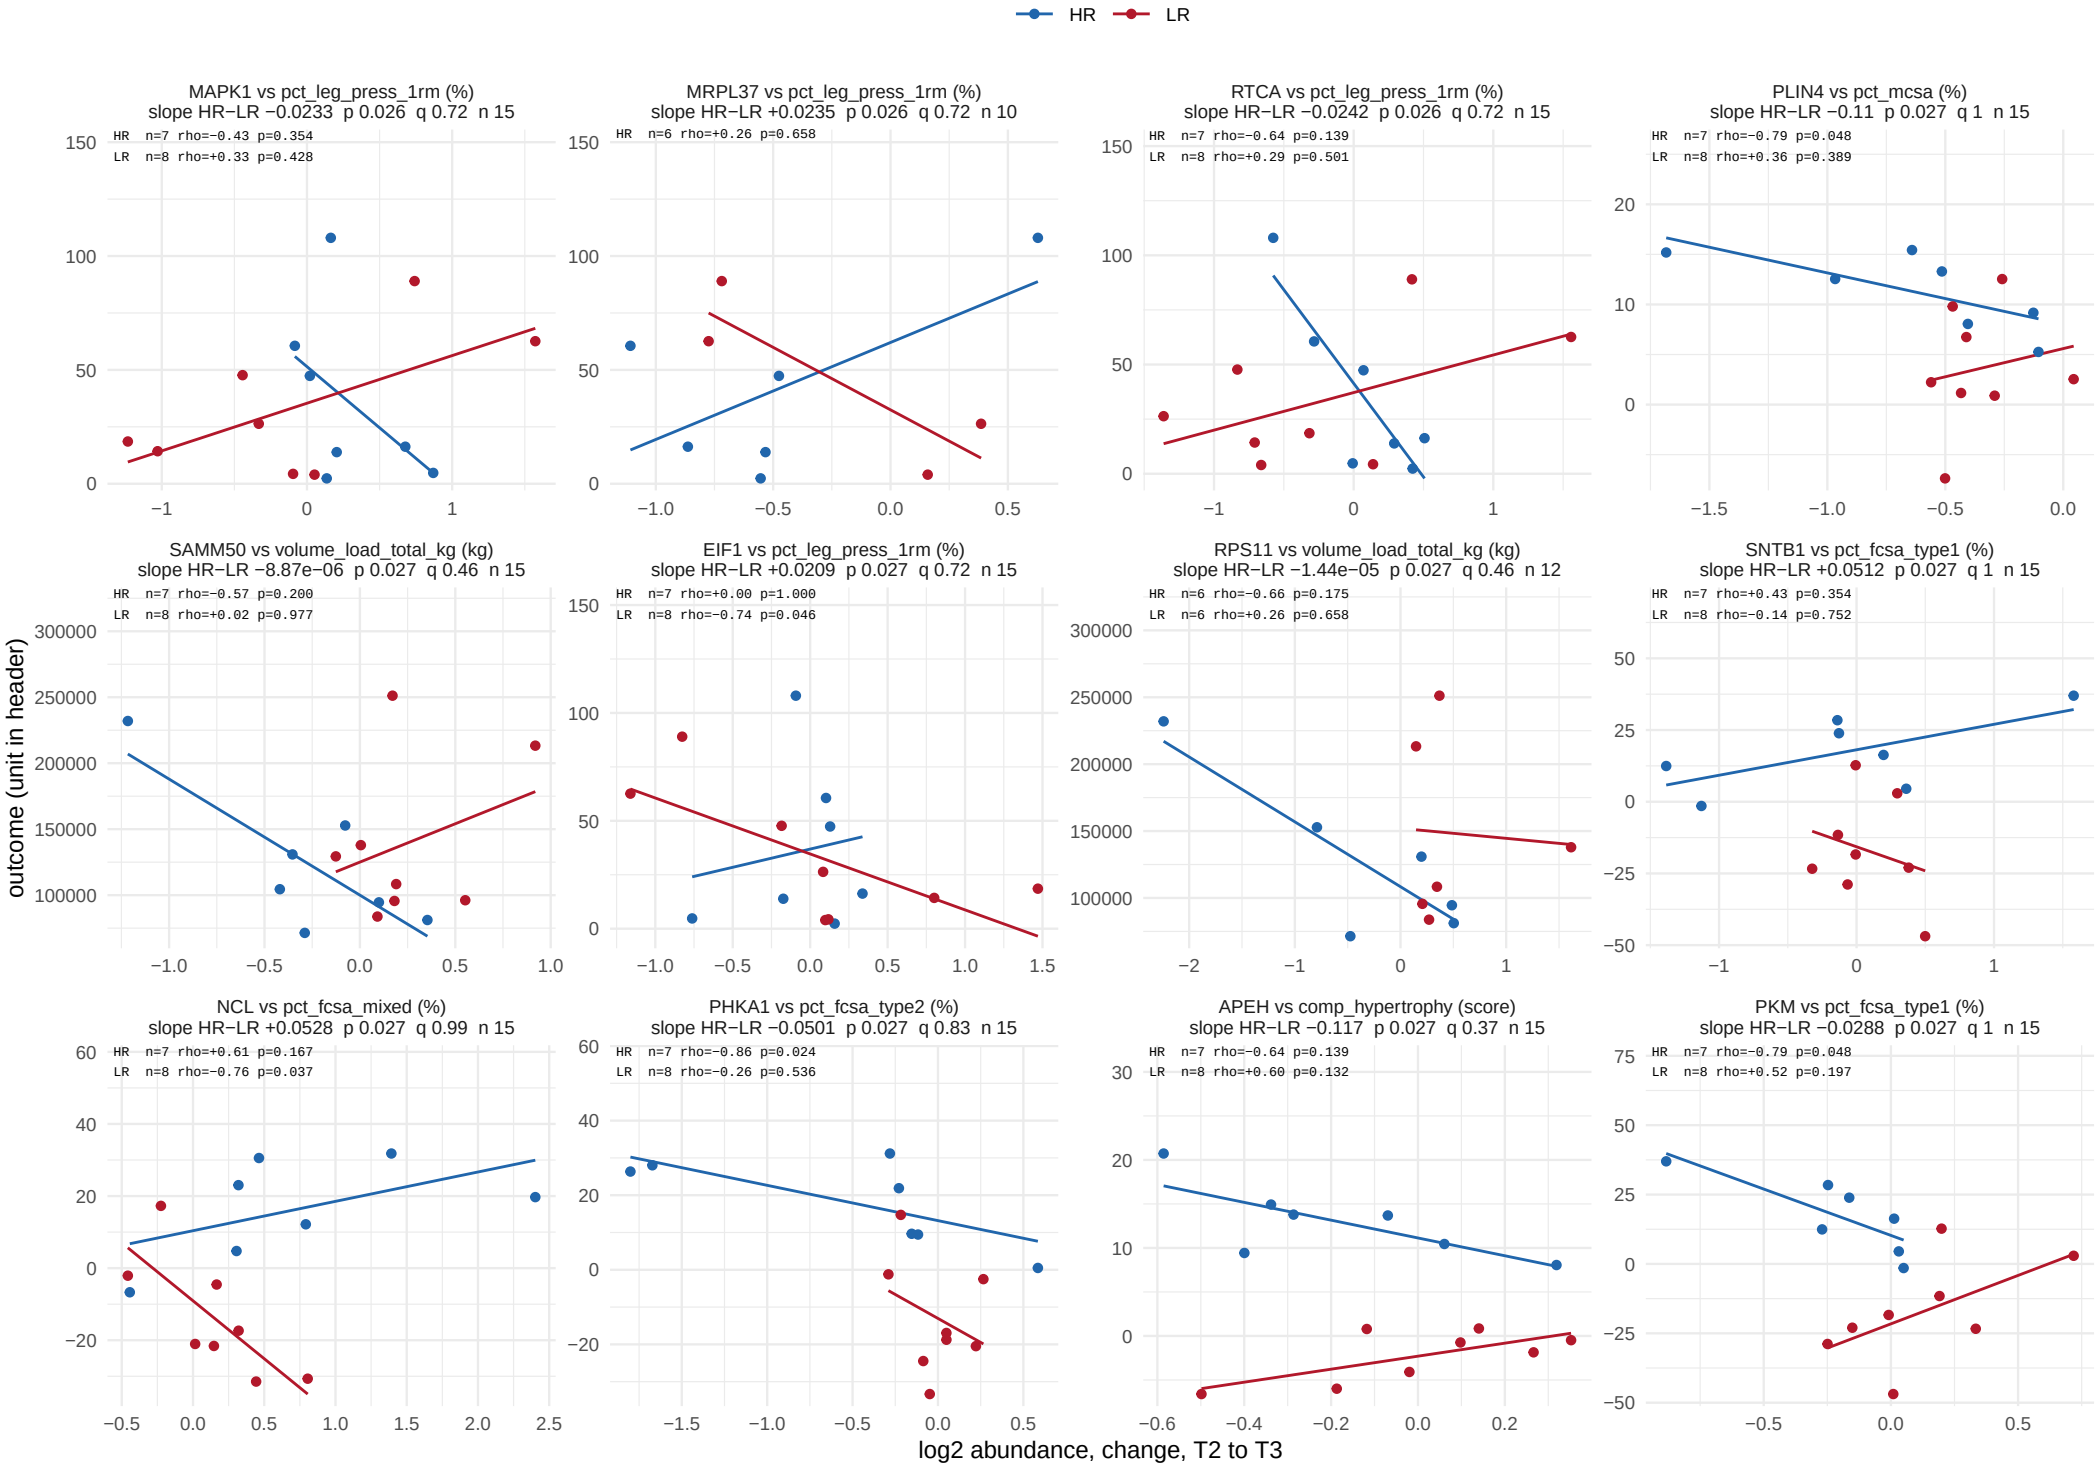

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


670 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 31 of 56.

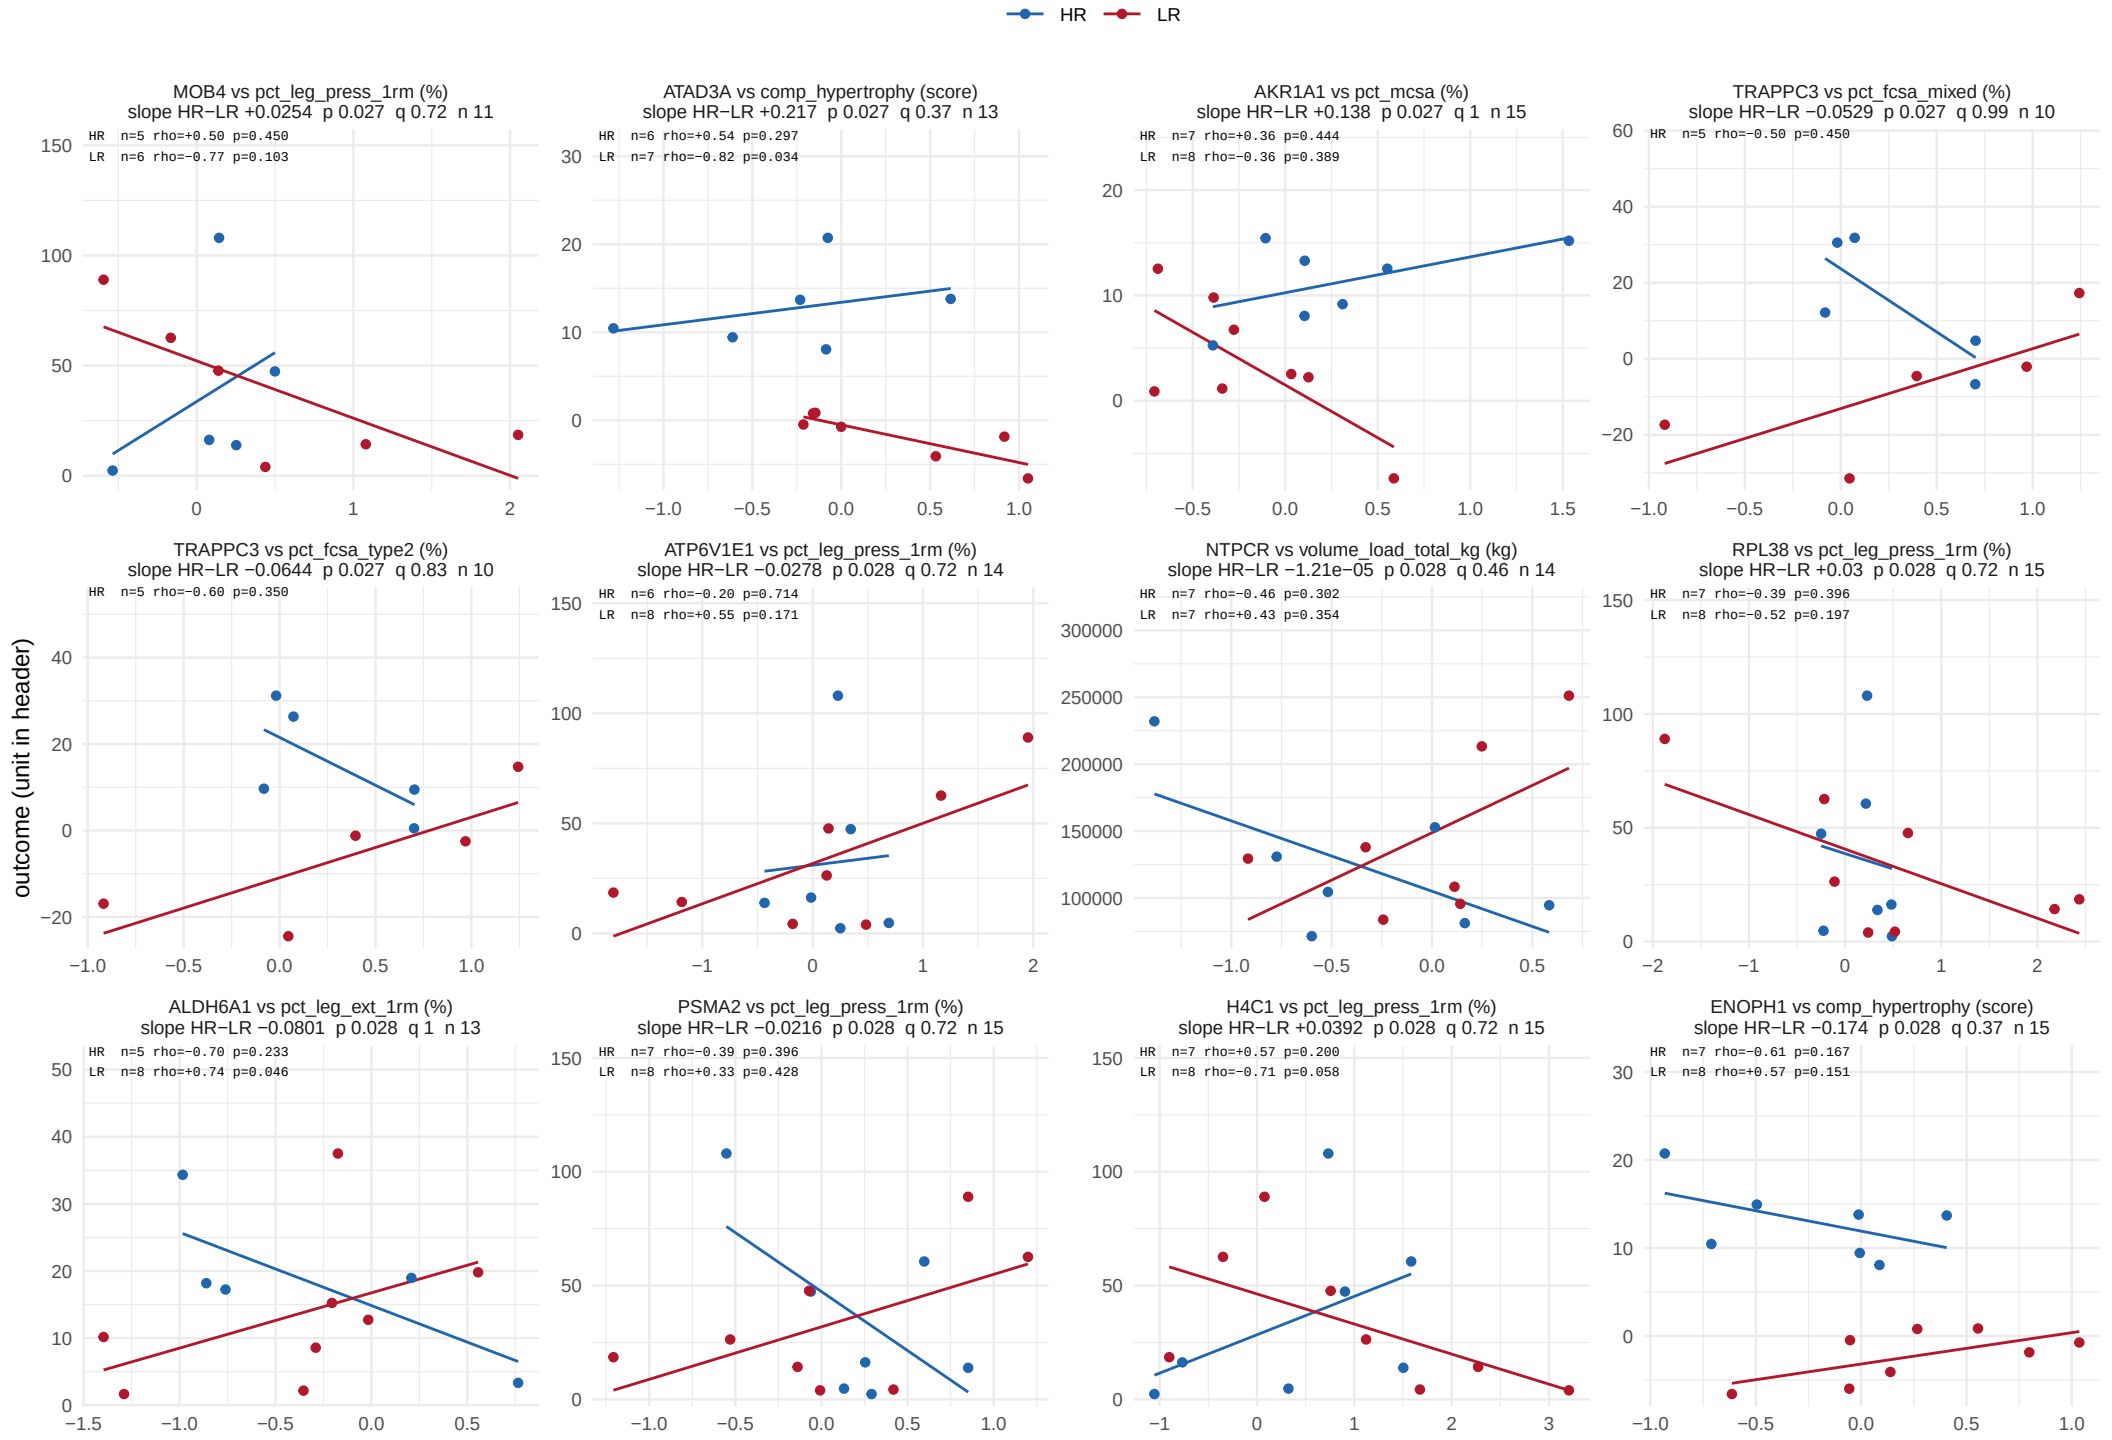

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


670 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 32 of 56.

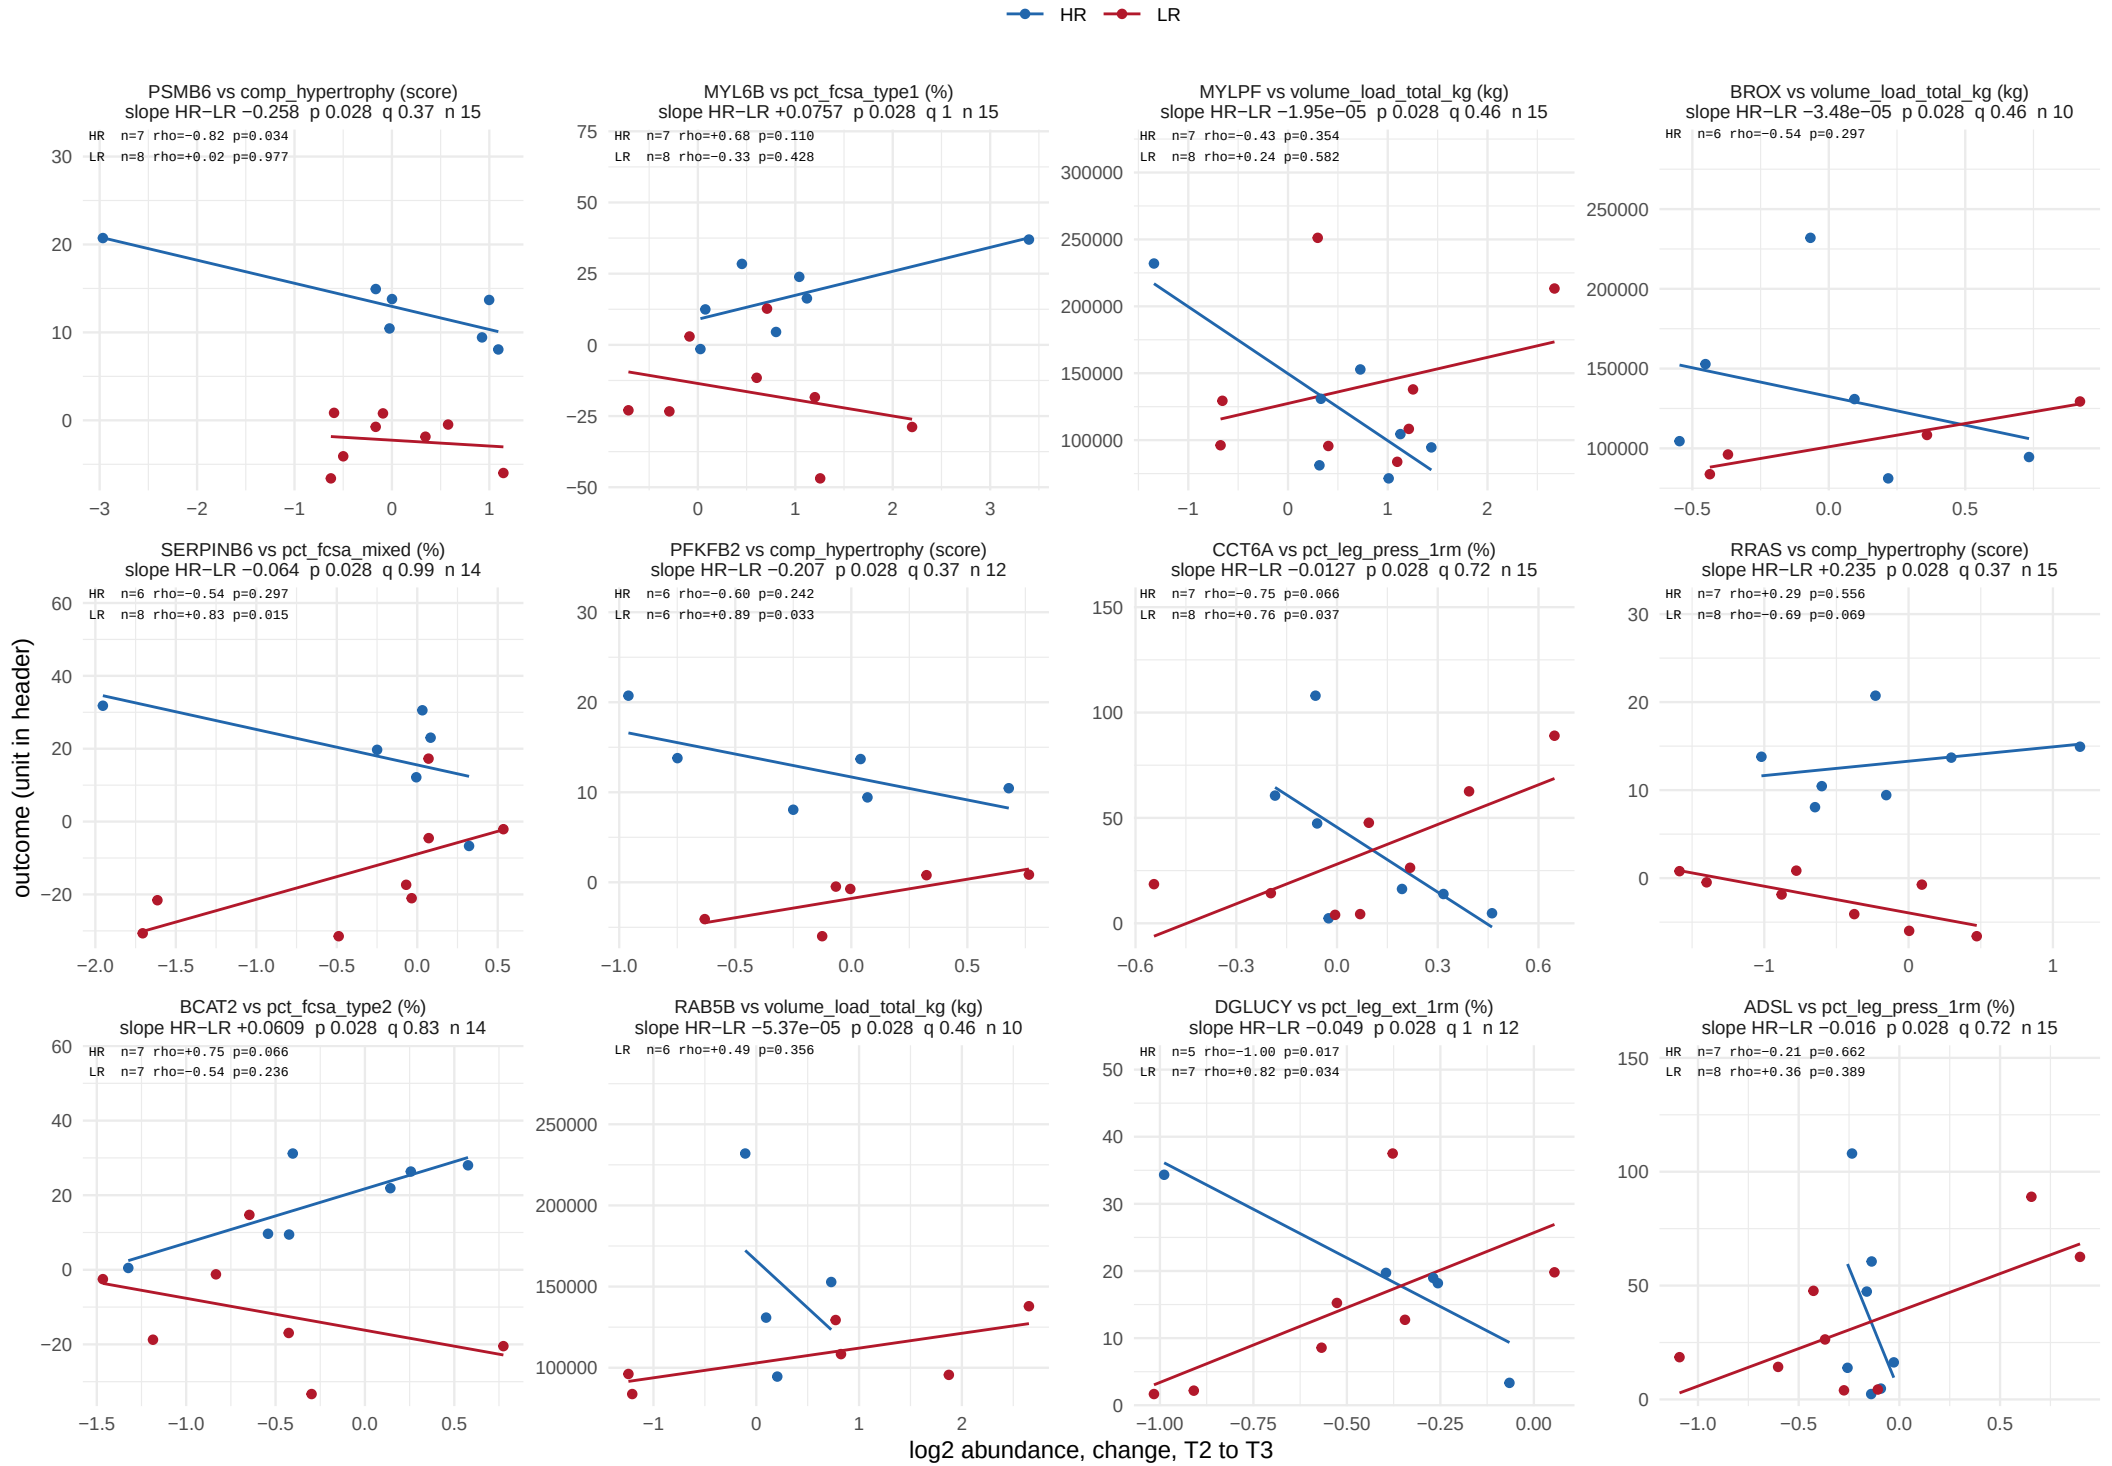

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


670 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 33 of 56.

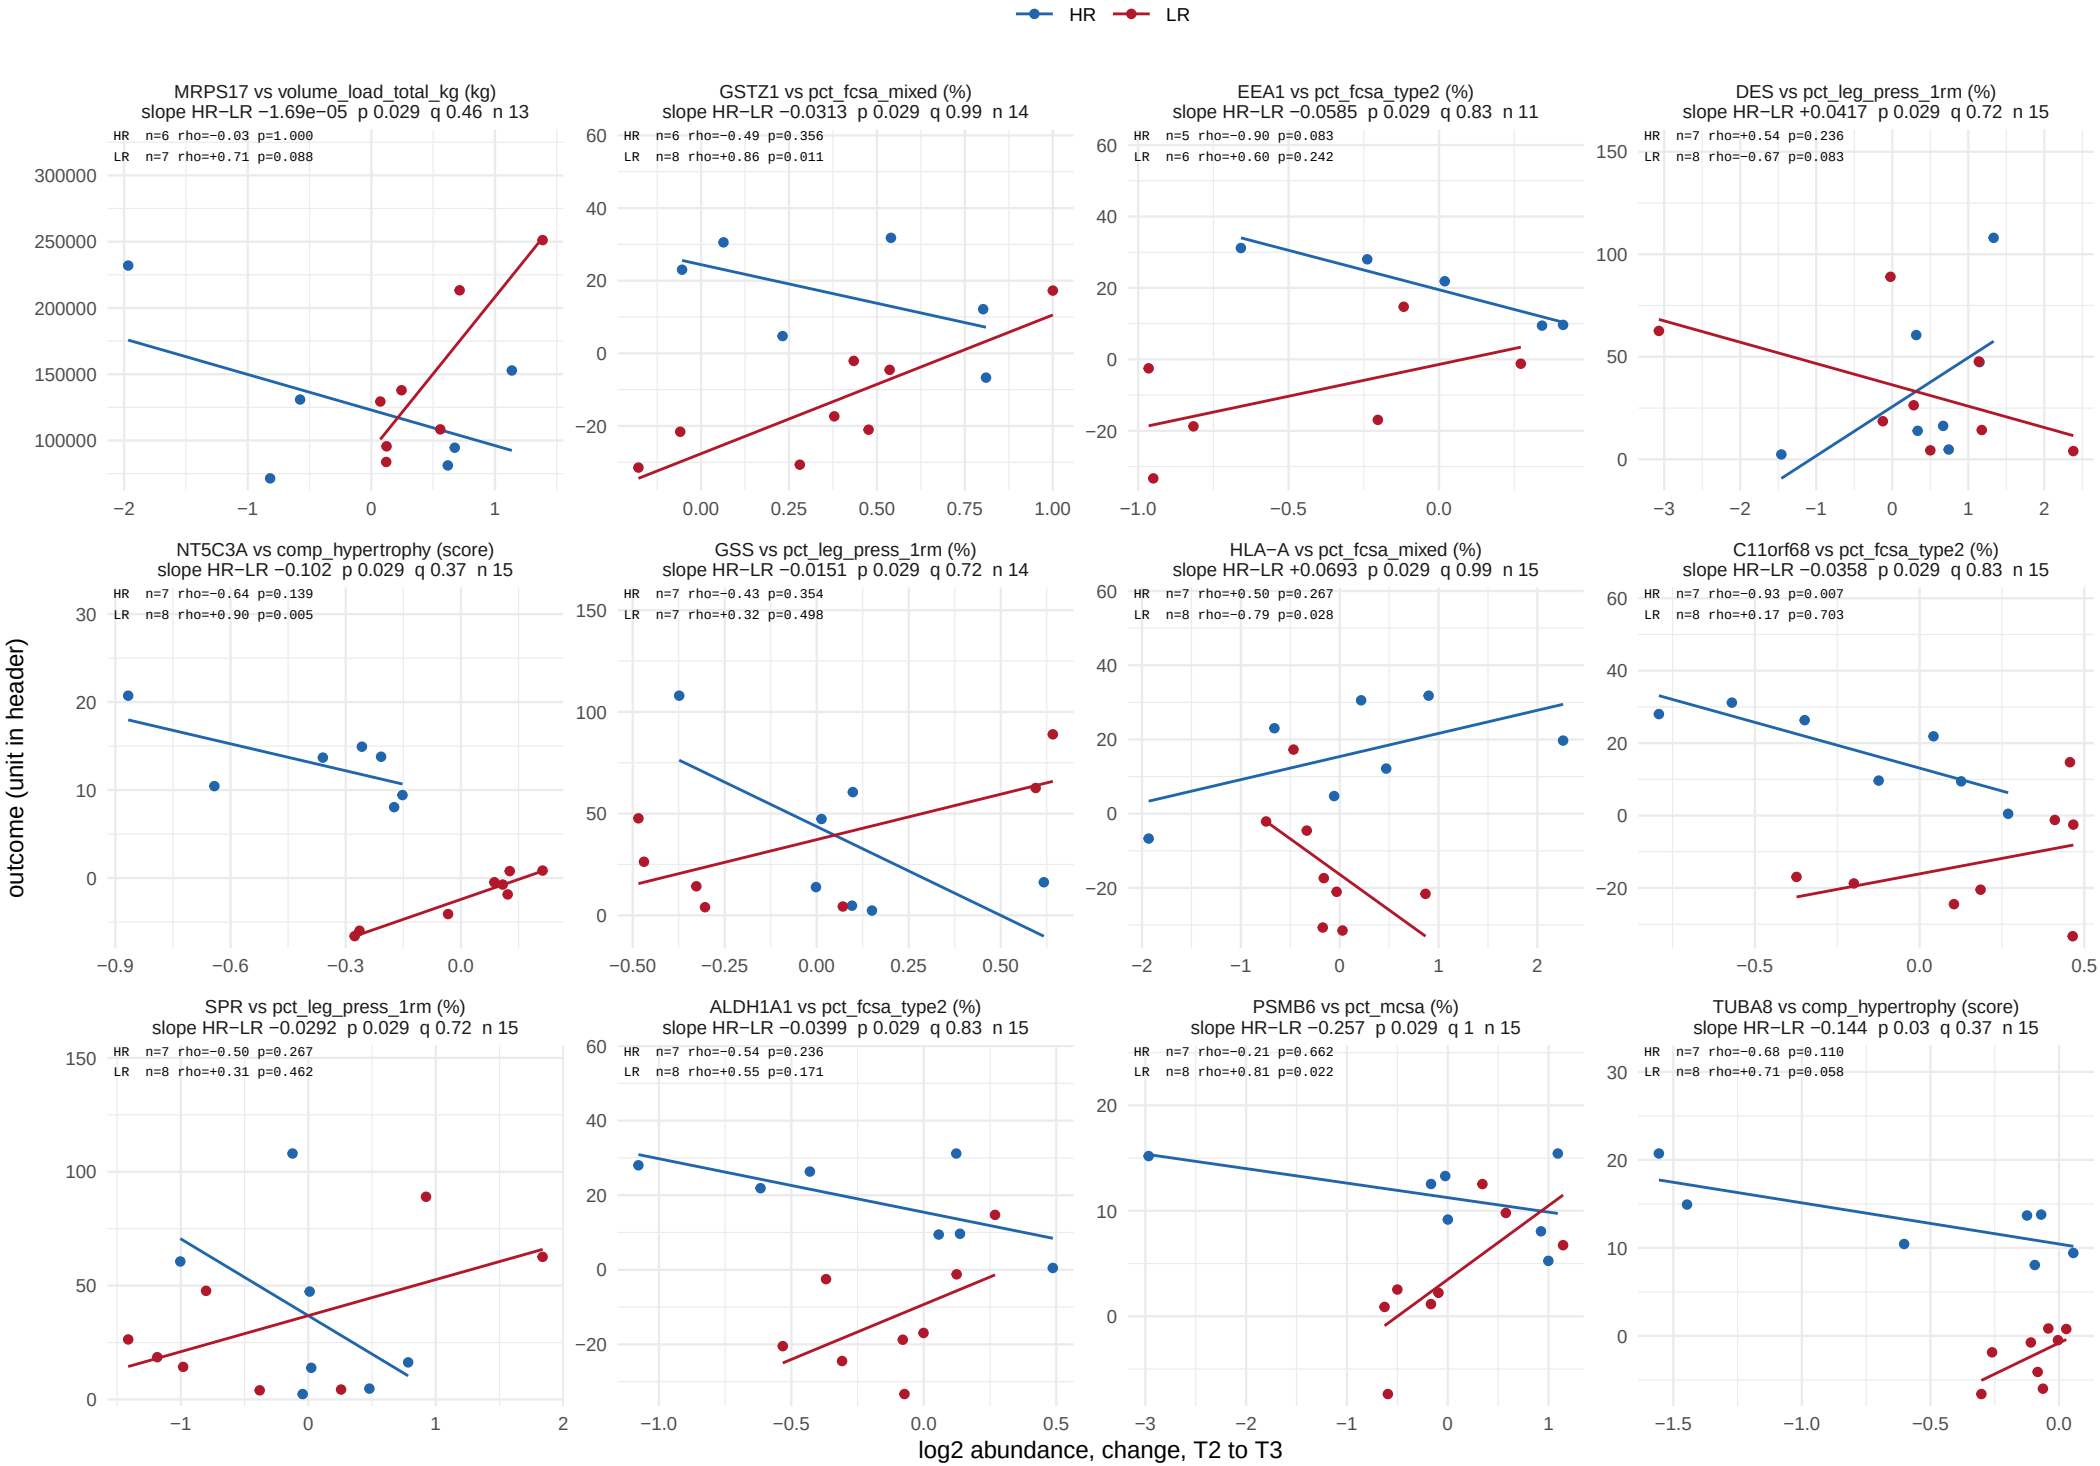

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


670 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 34 of 56.

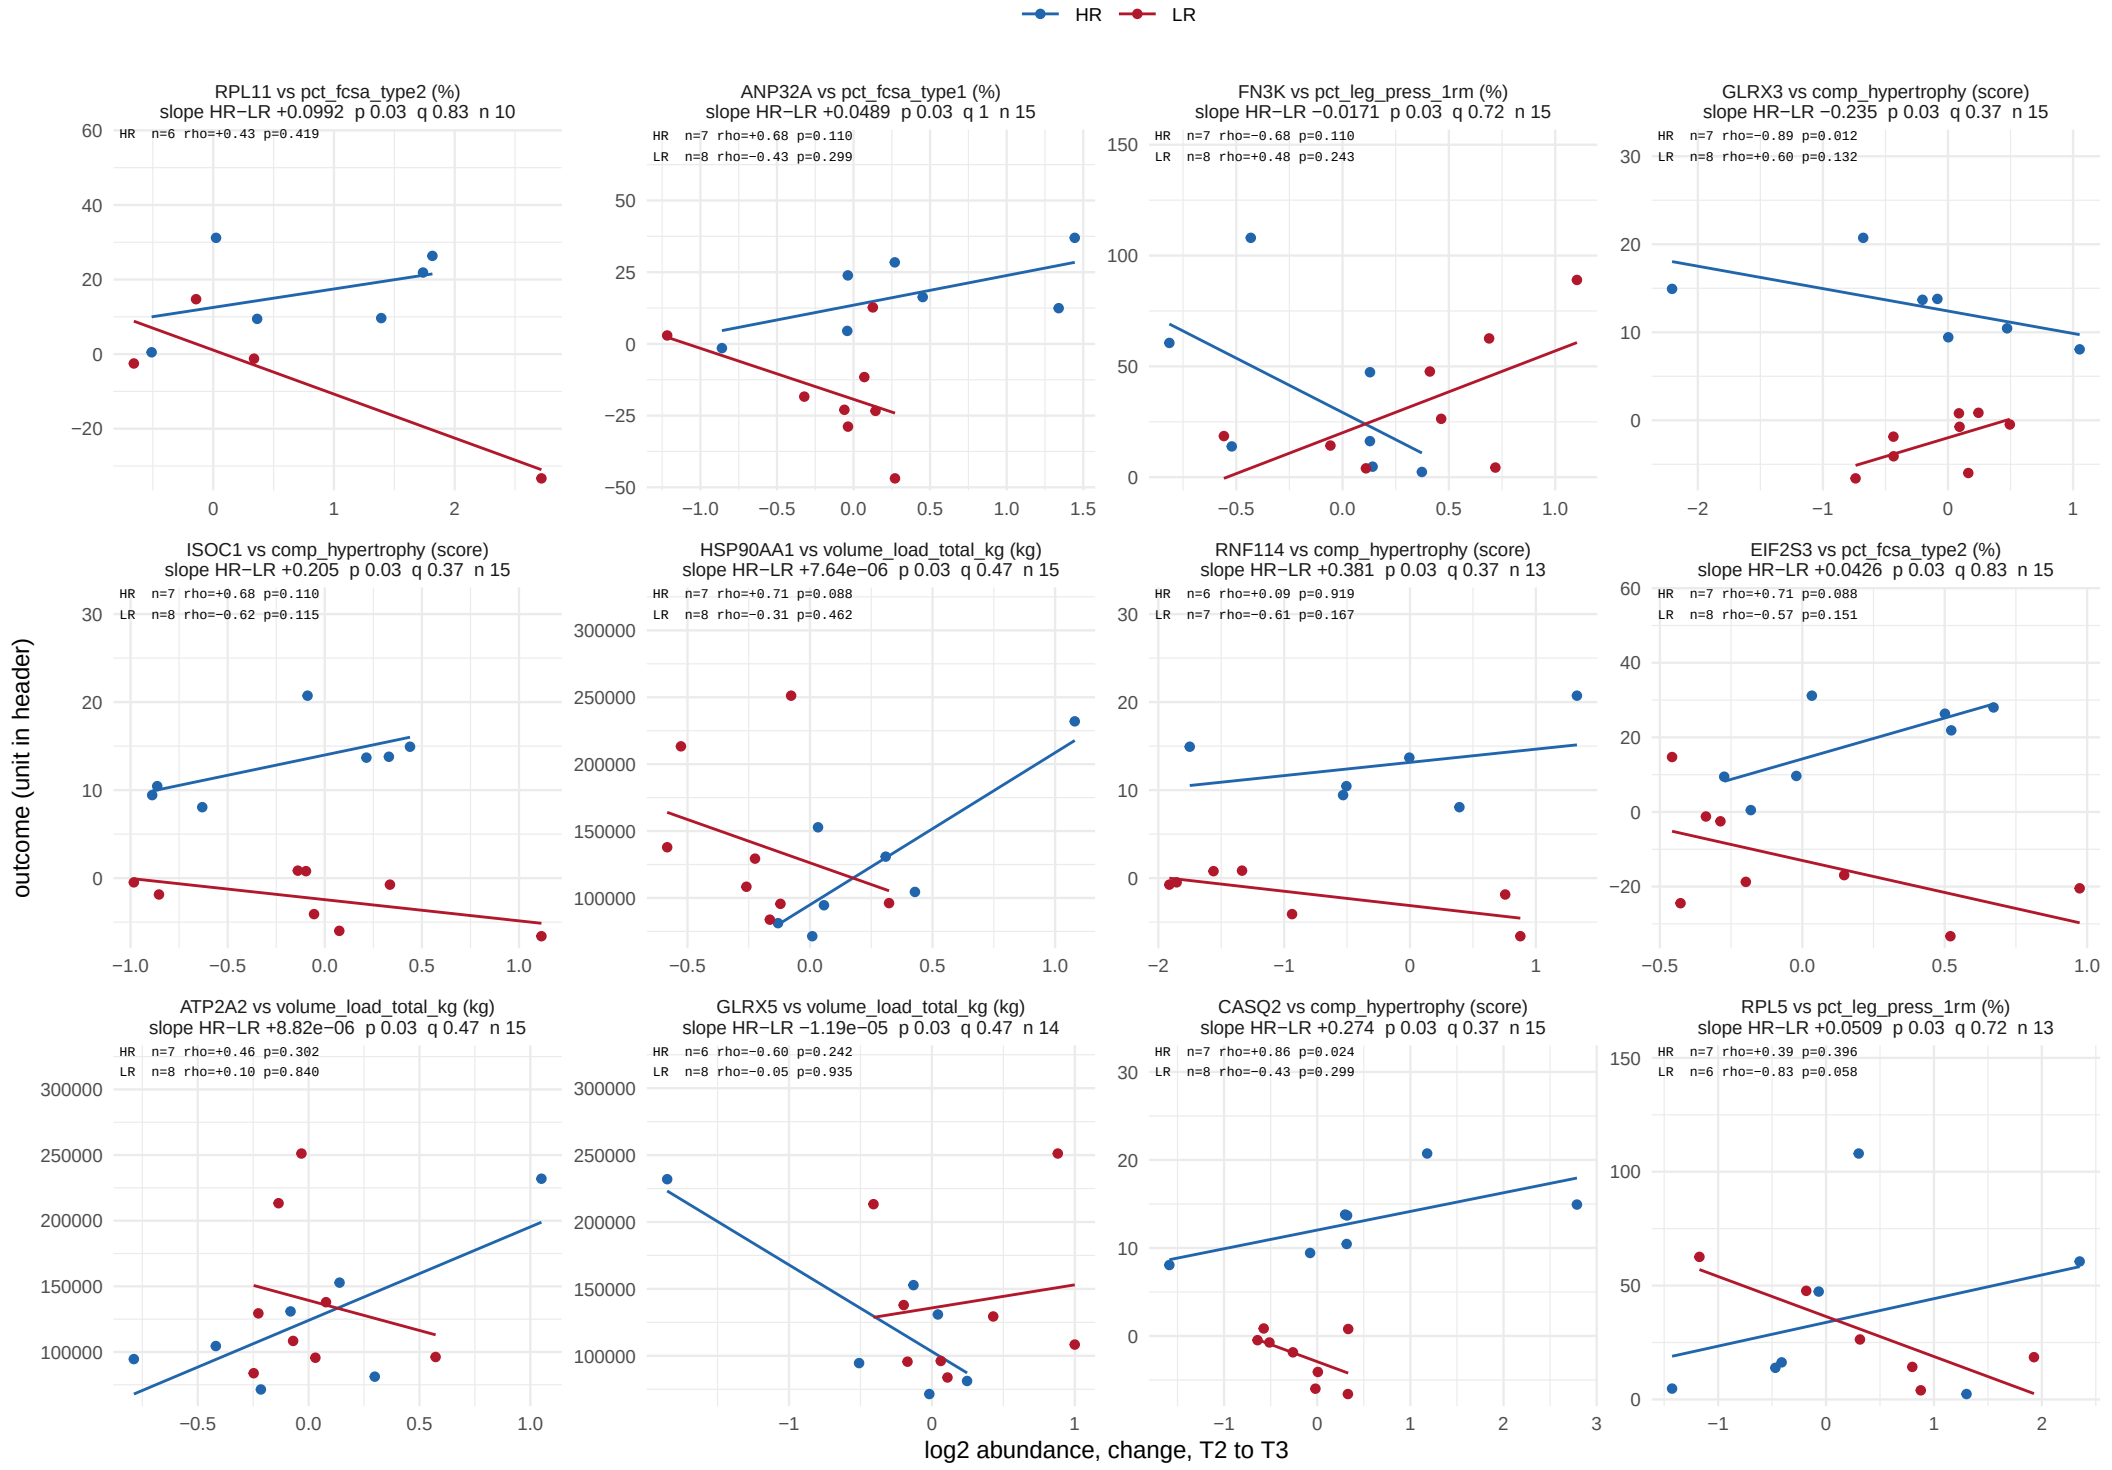

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


670 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 35 of 56.

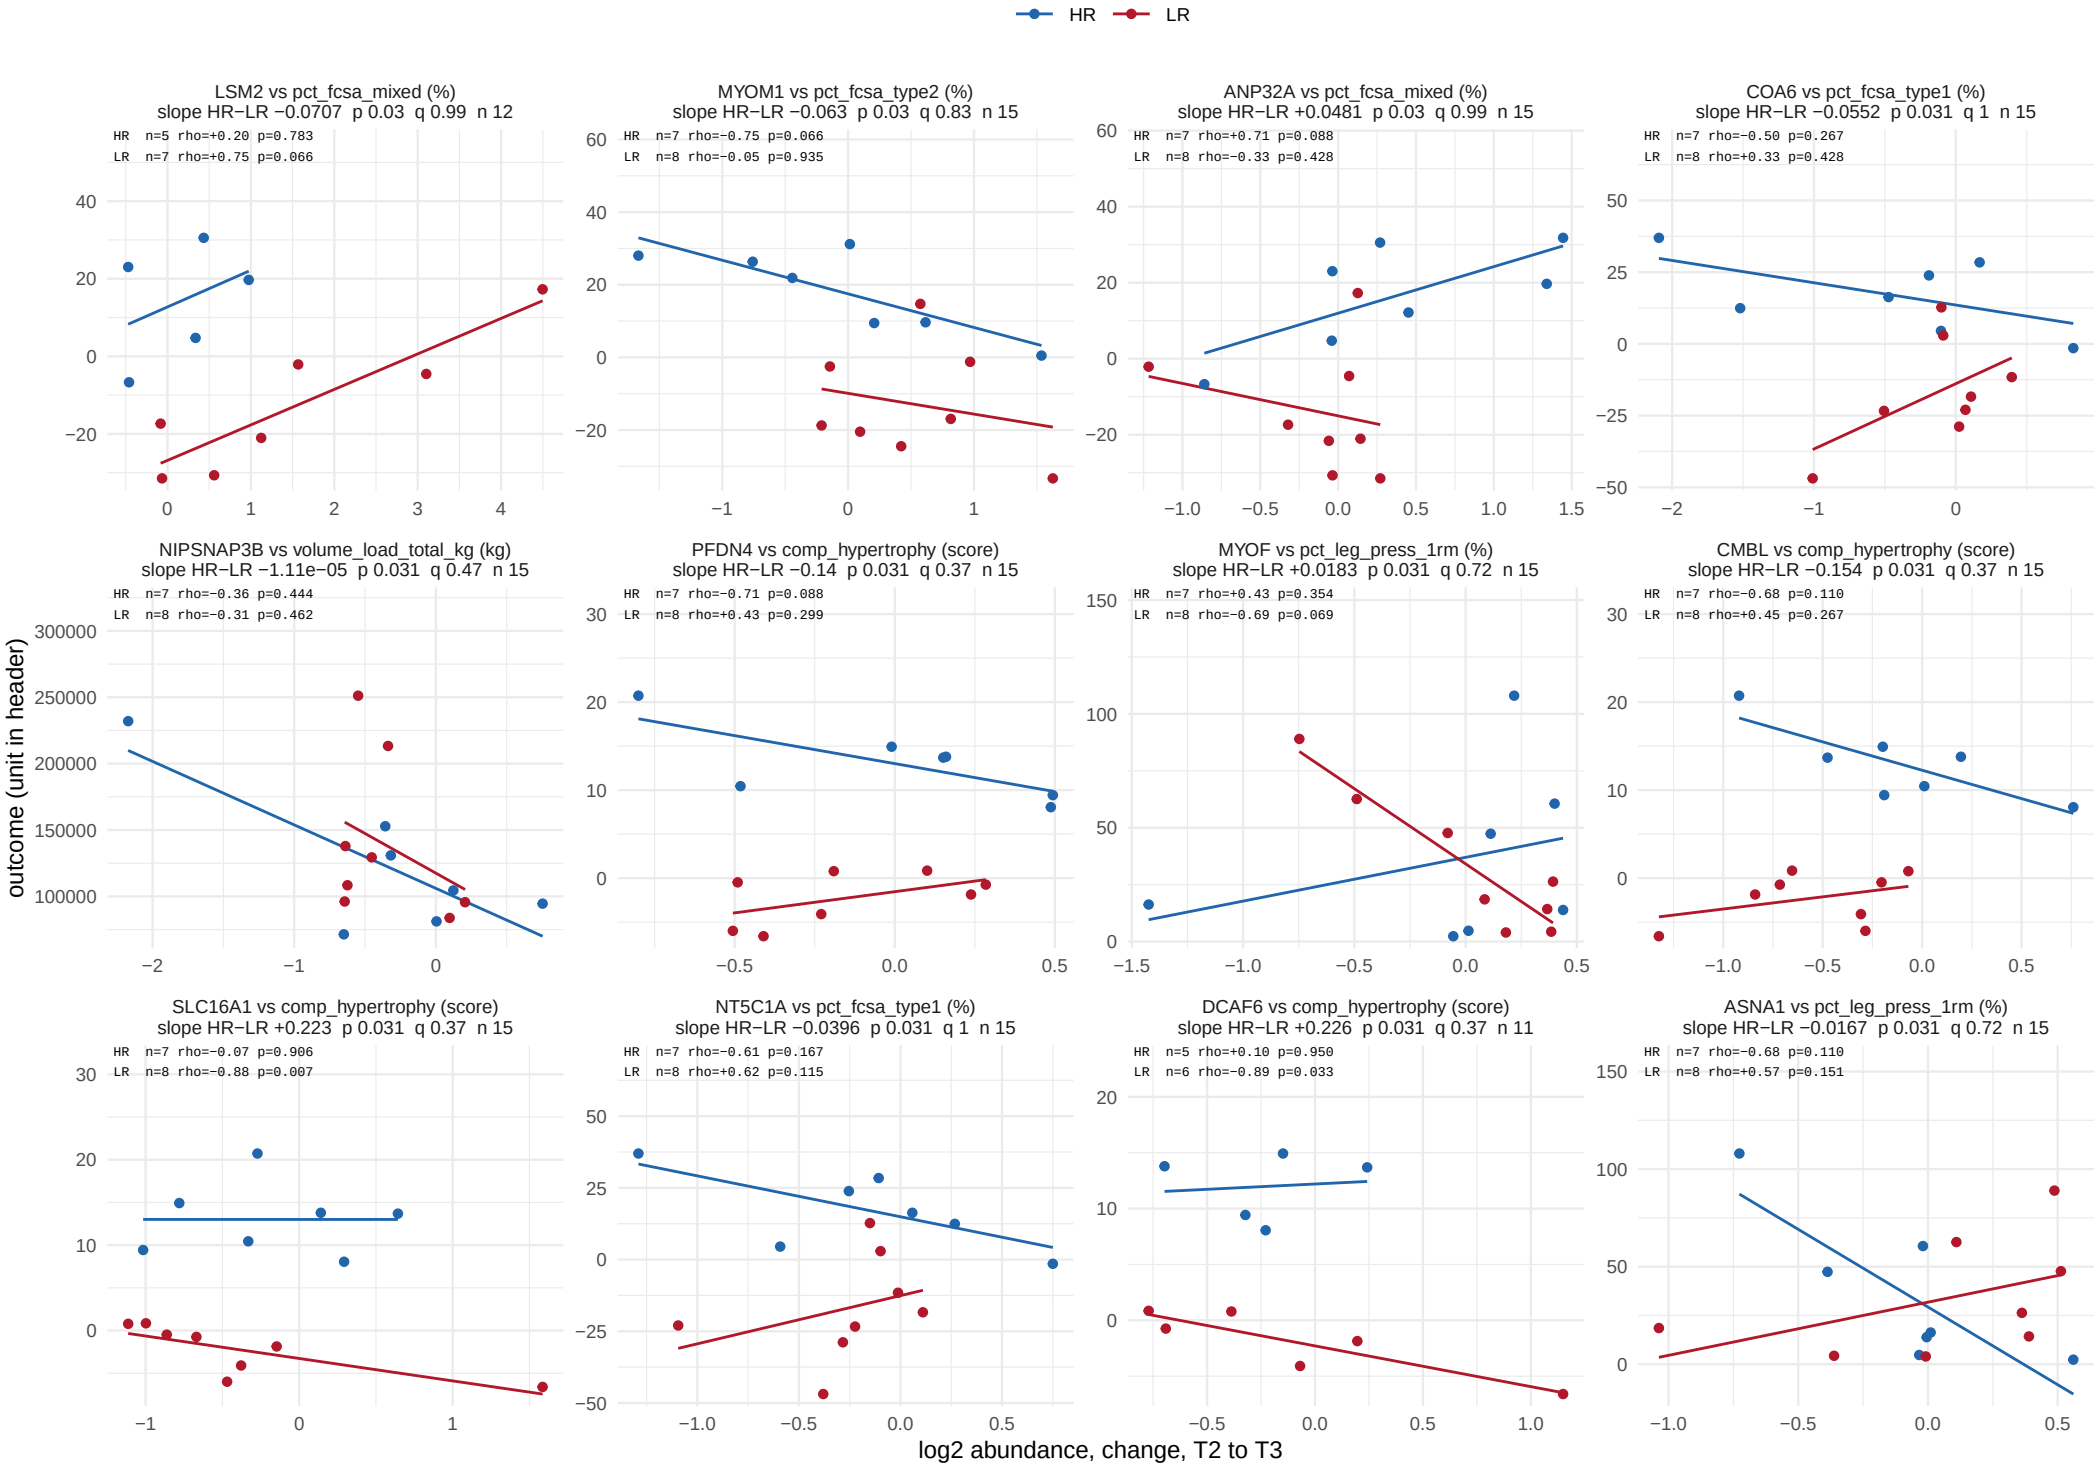

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


670 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 36 of 56.

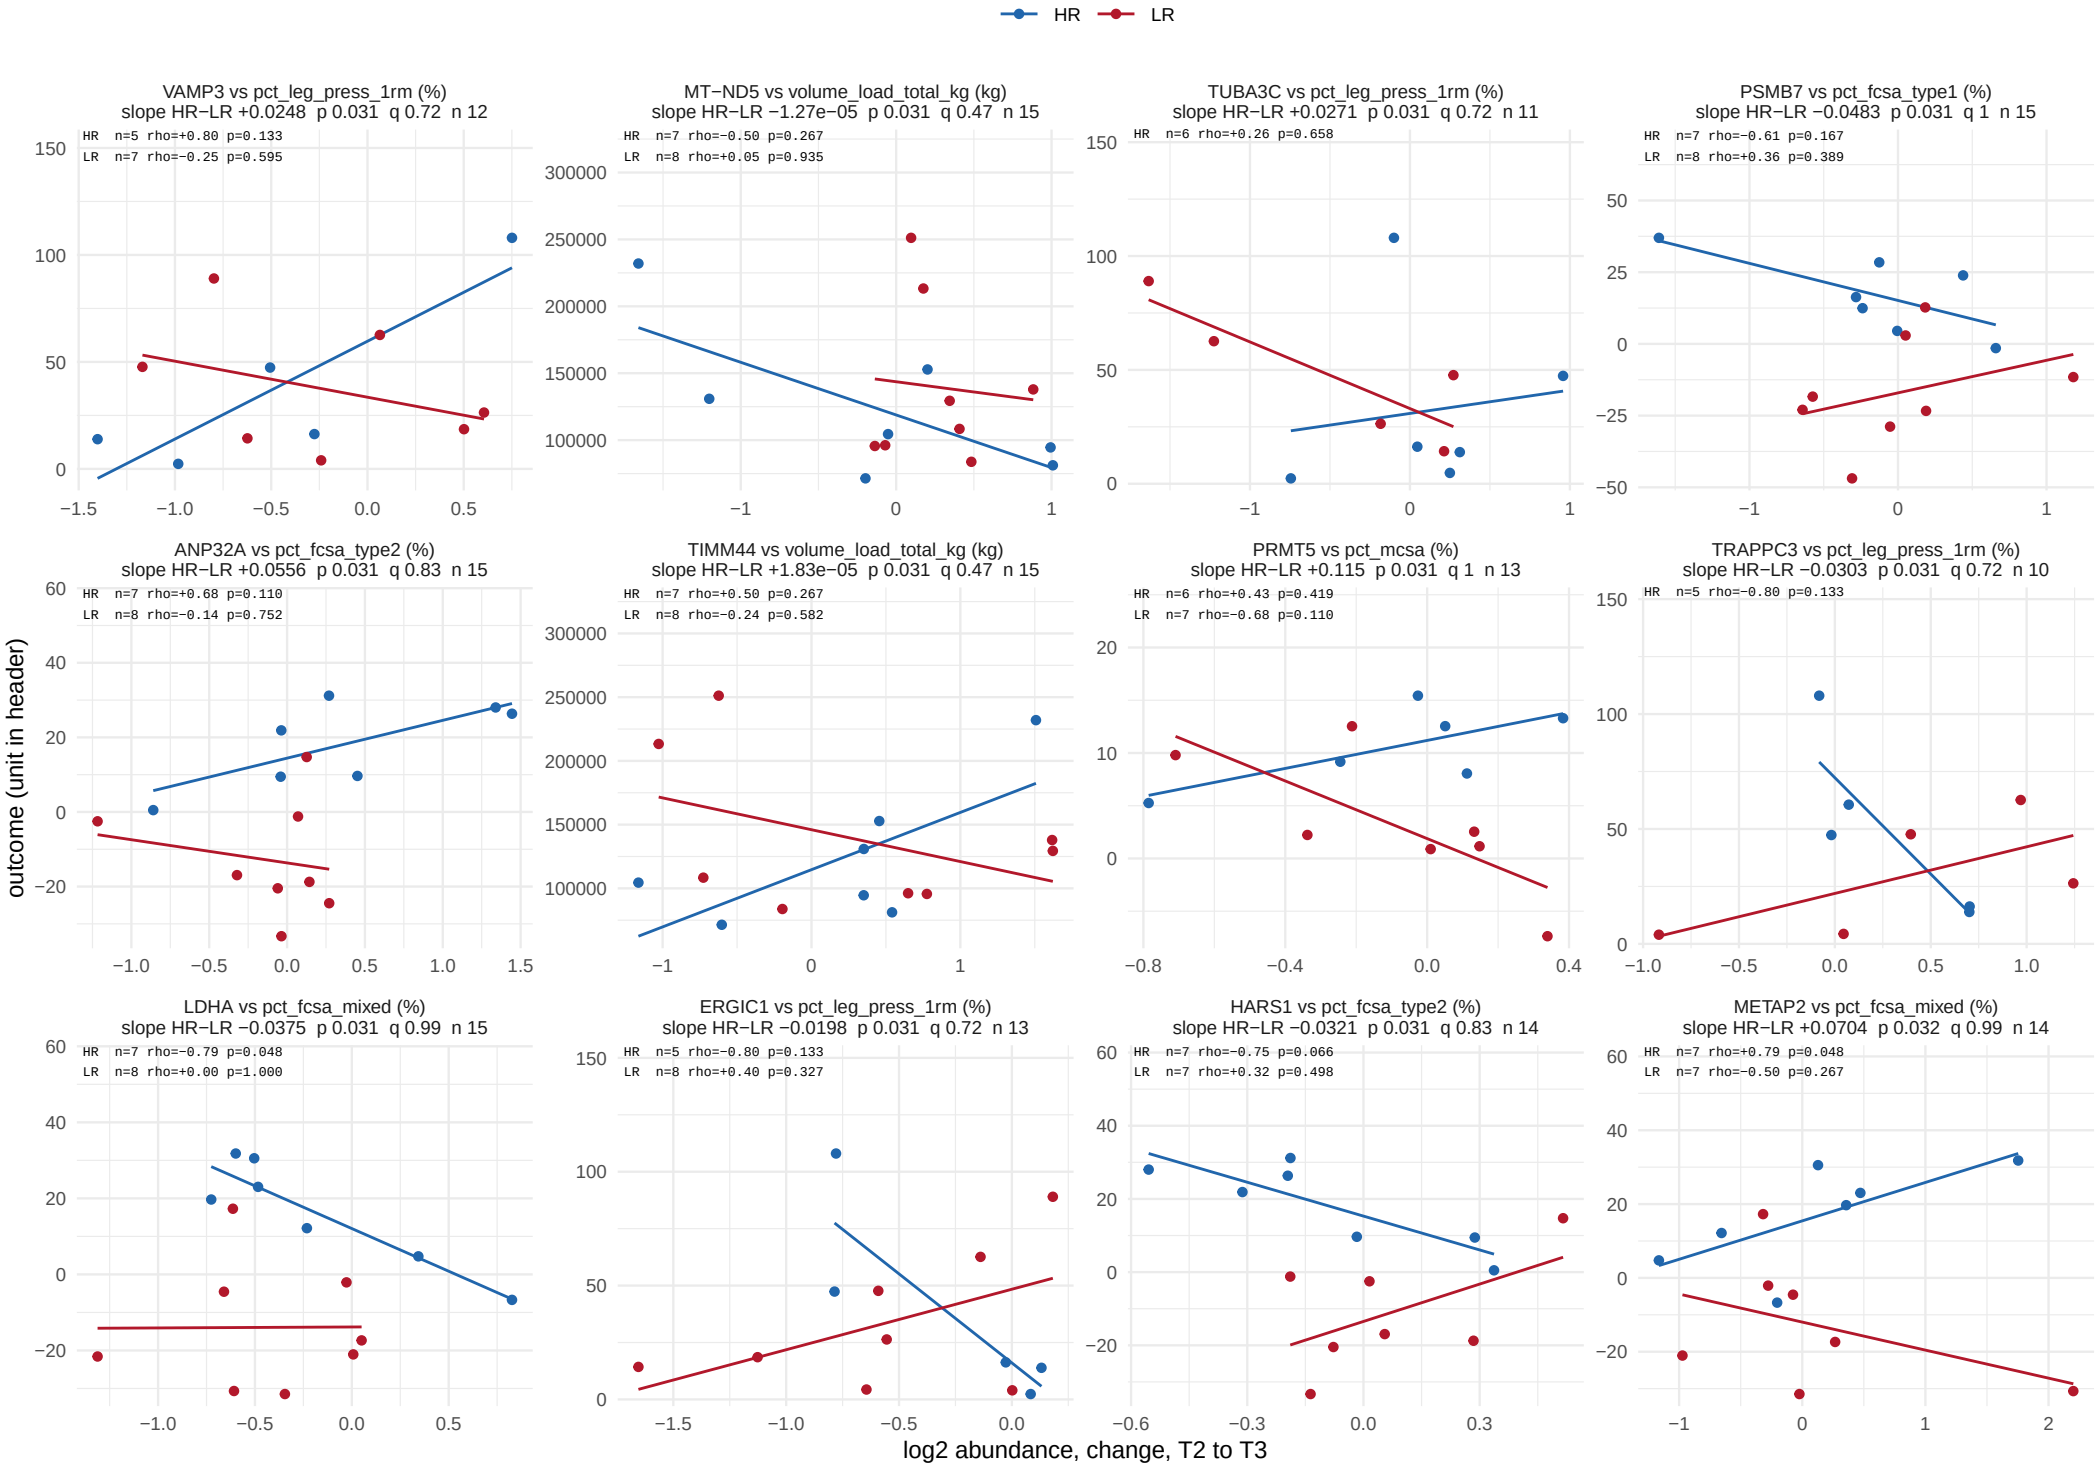

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


670 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 37 of 56.

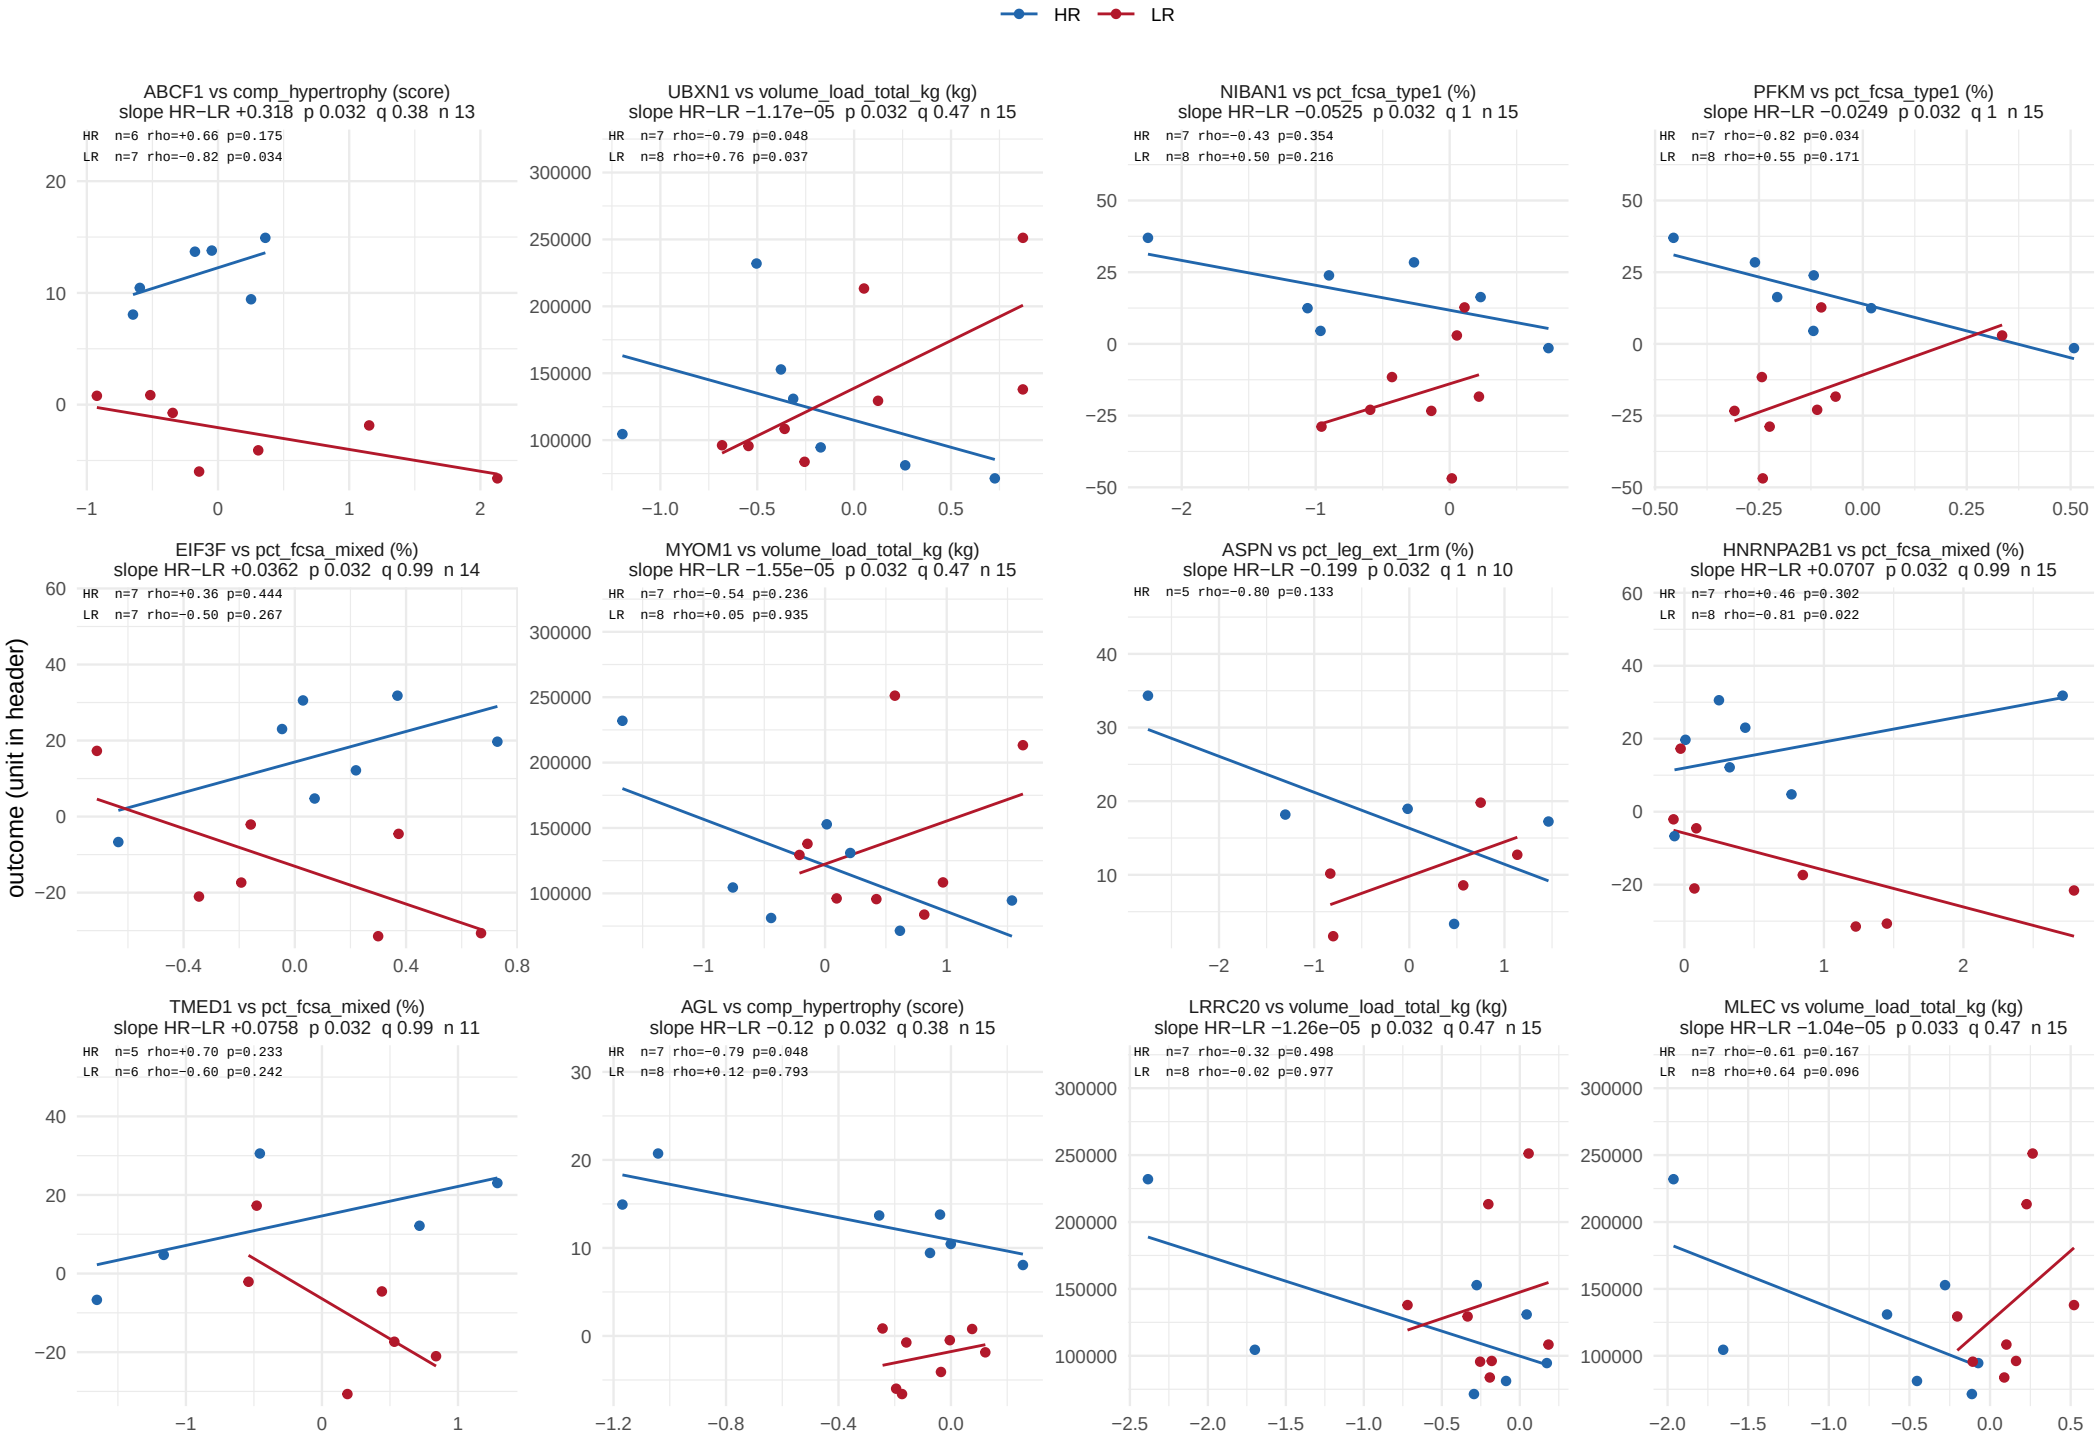

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


670 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 38 of 56.

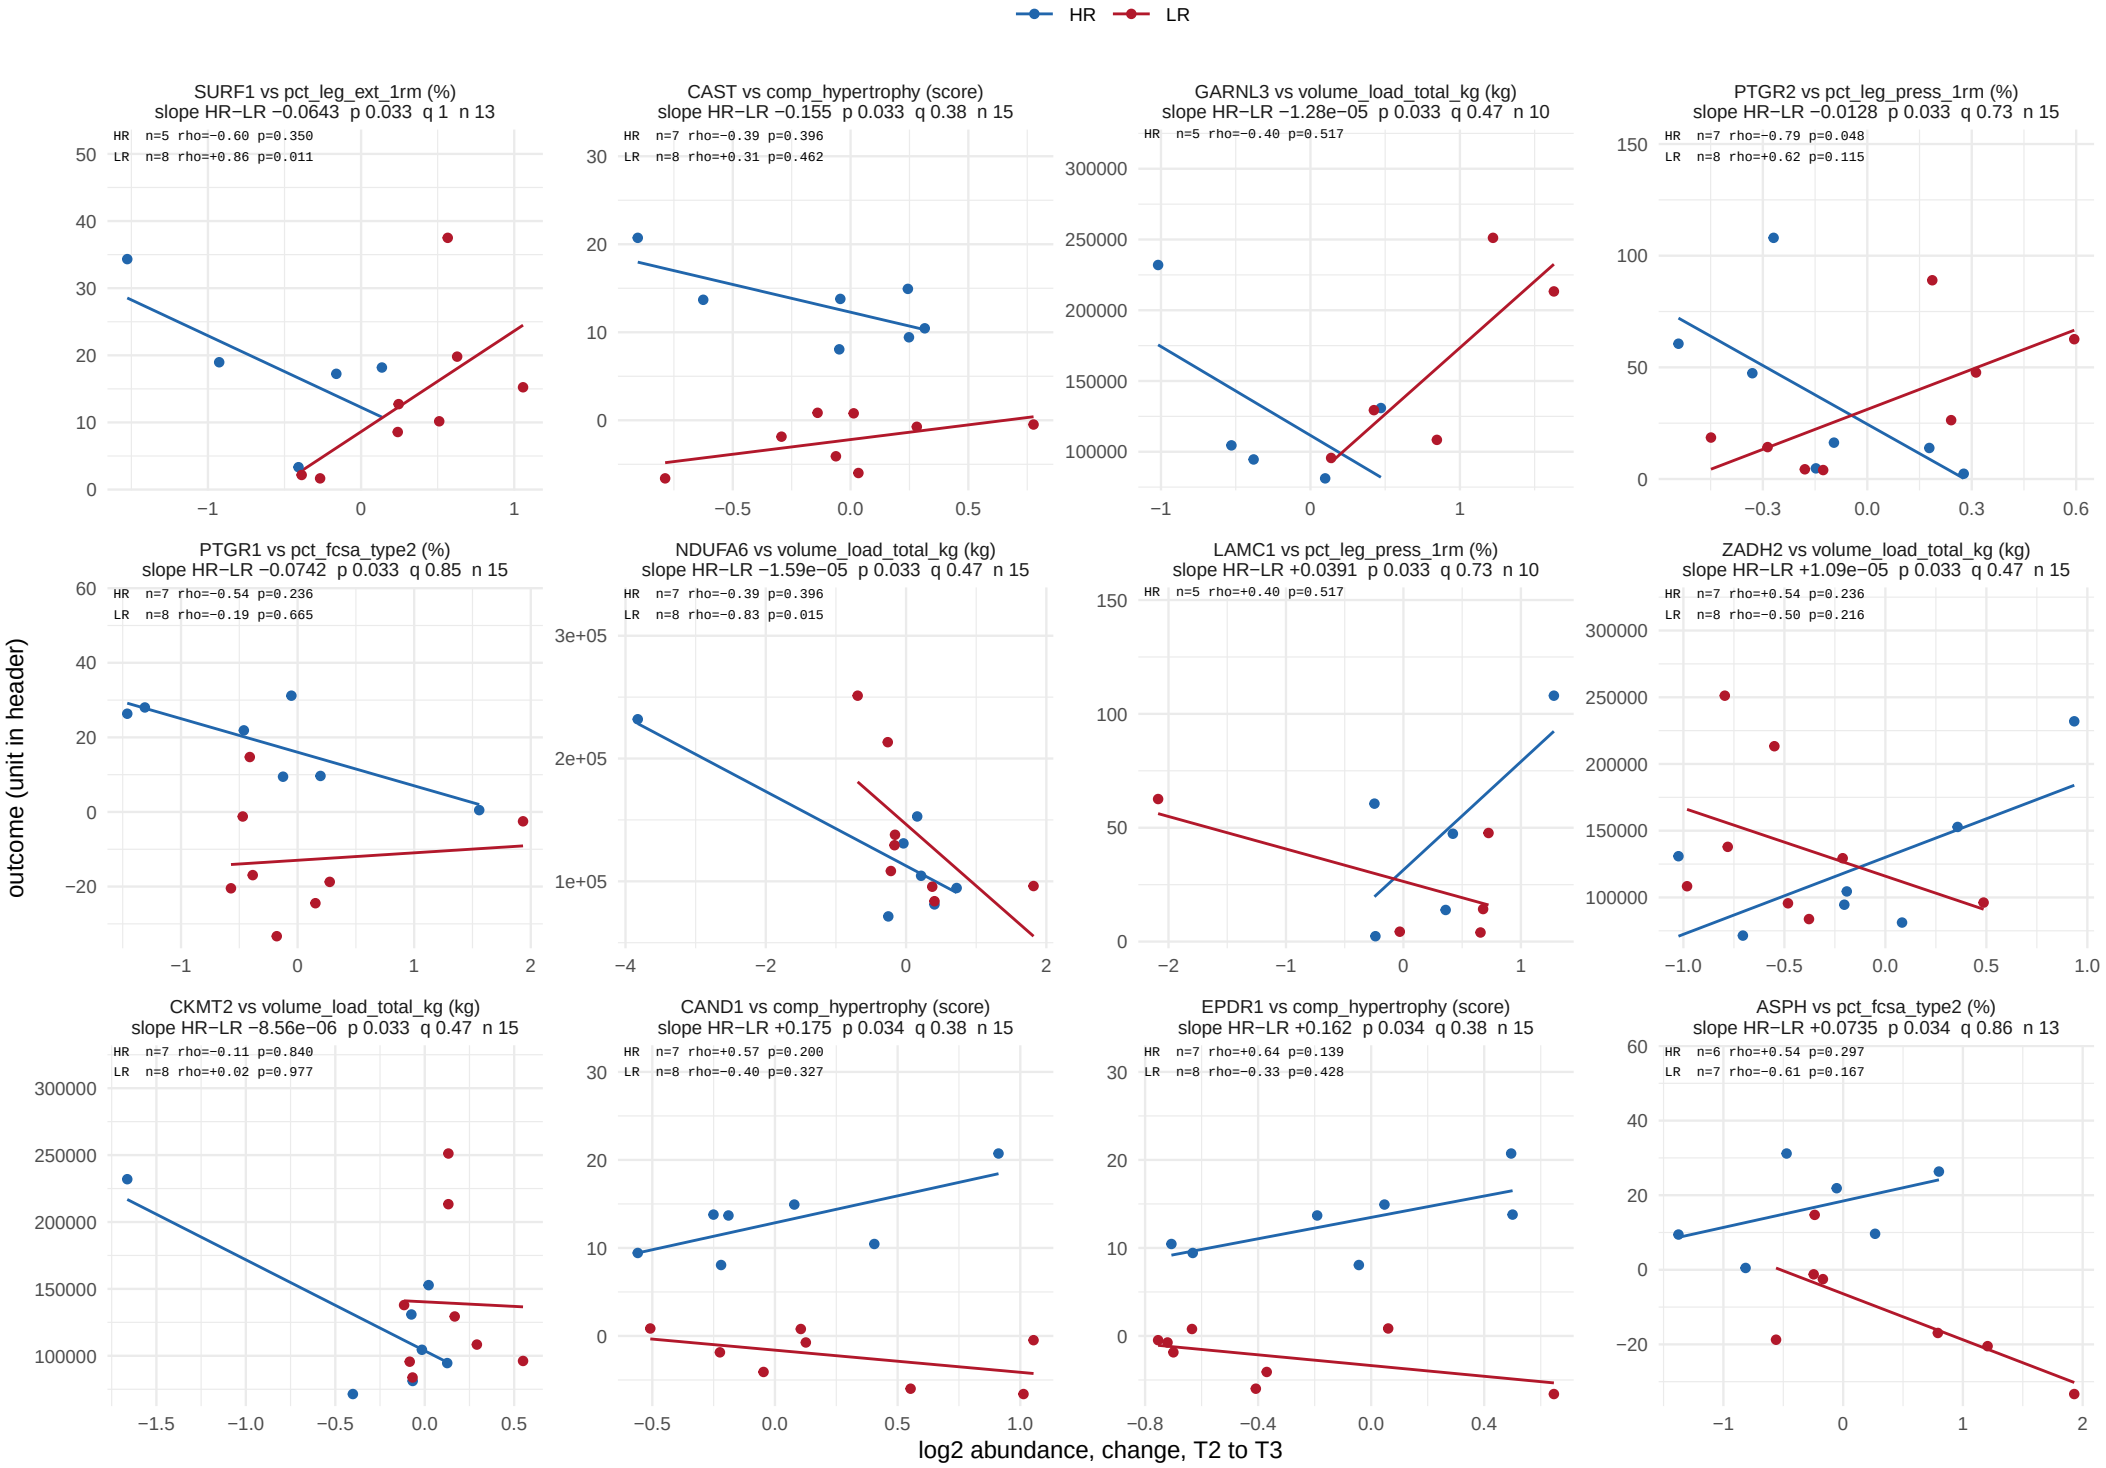

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


670 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 39 of 56.

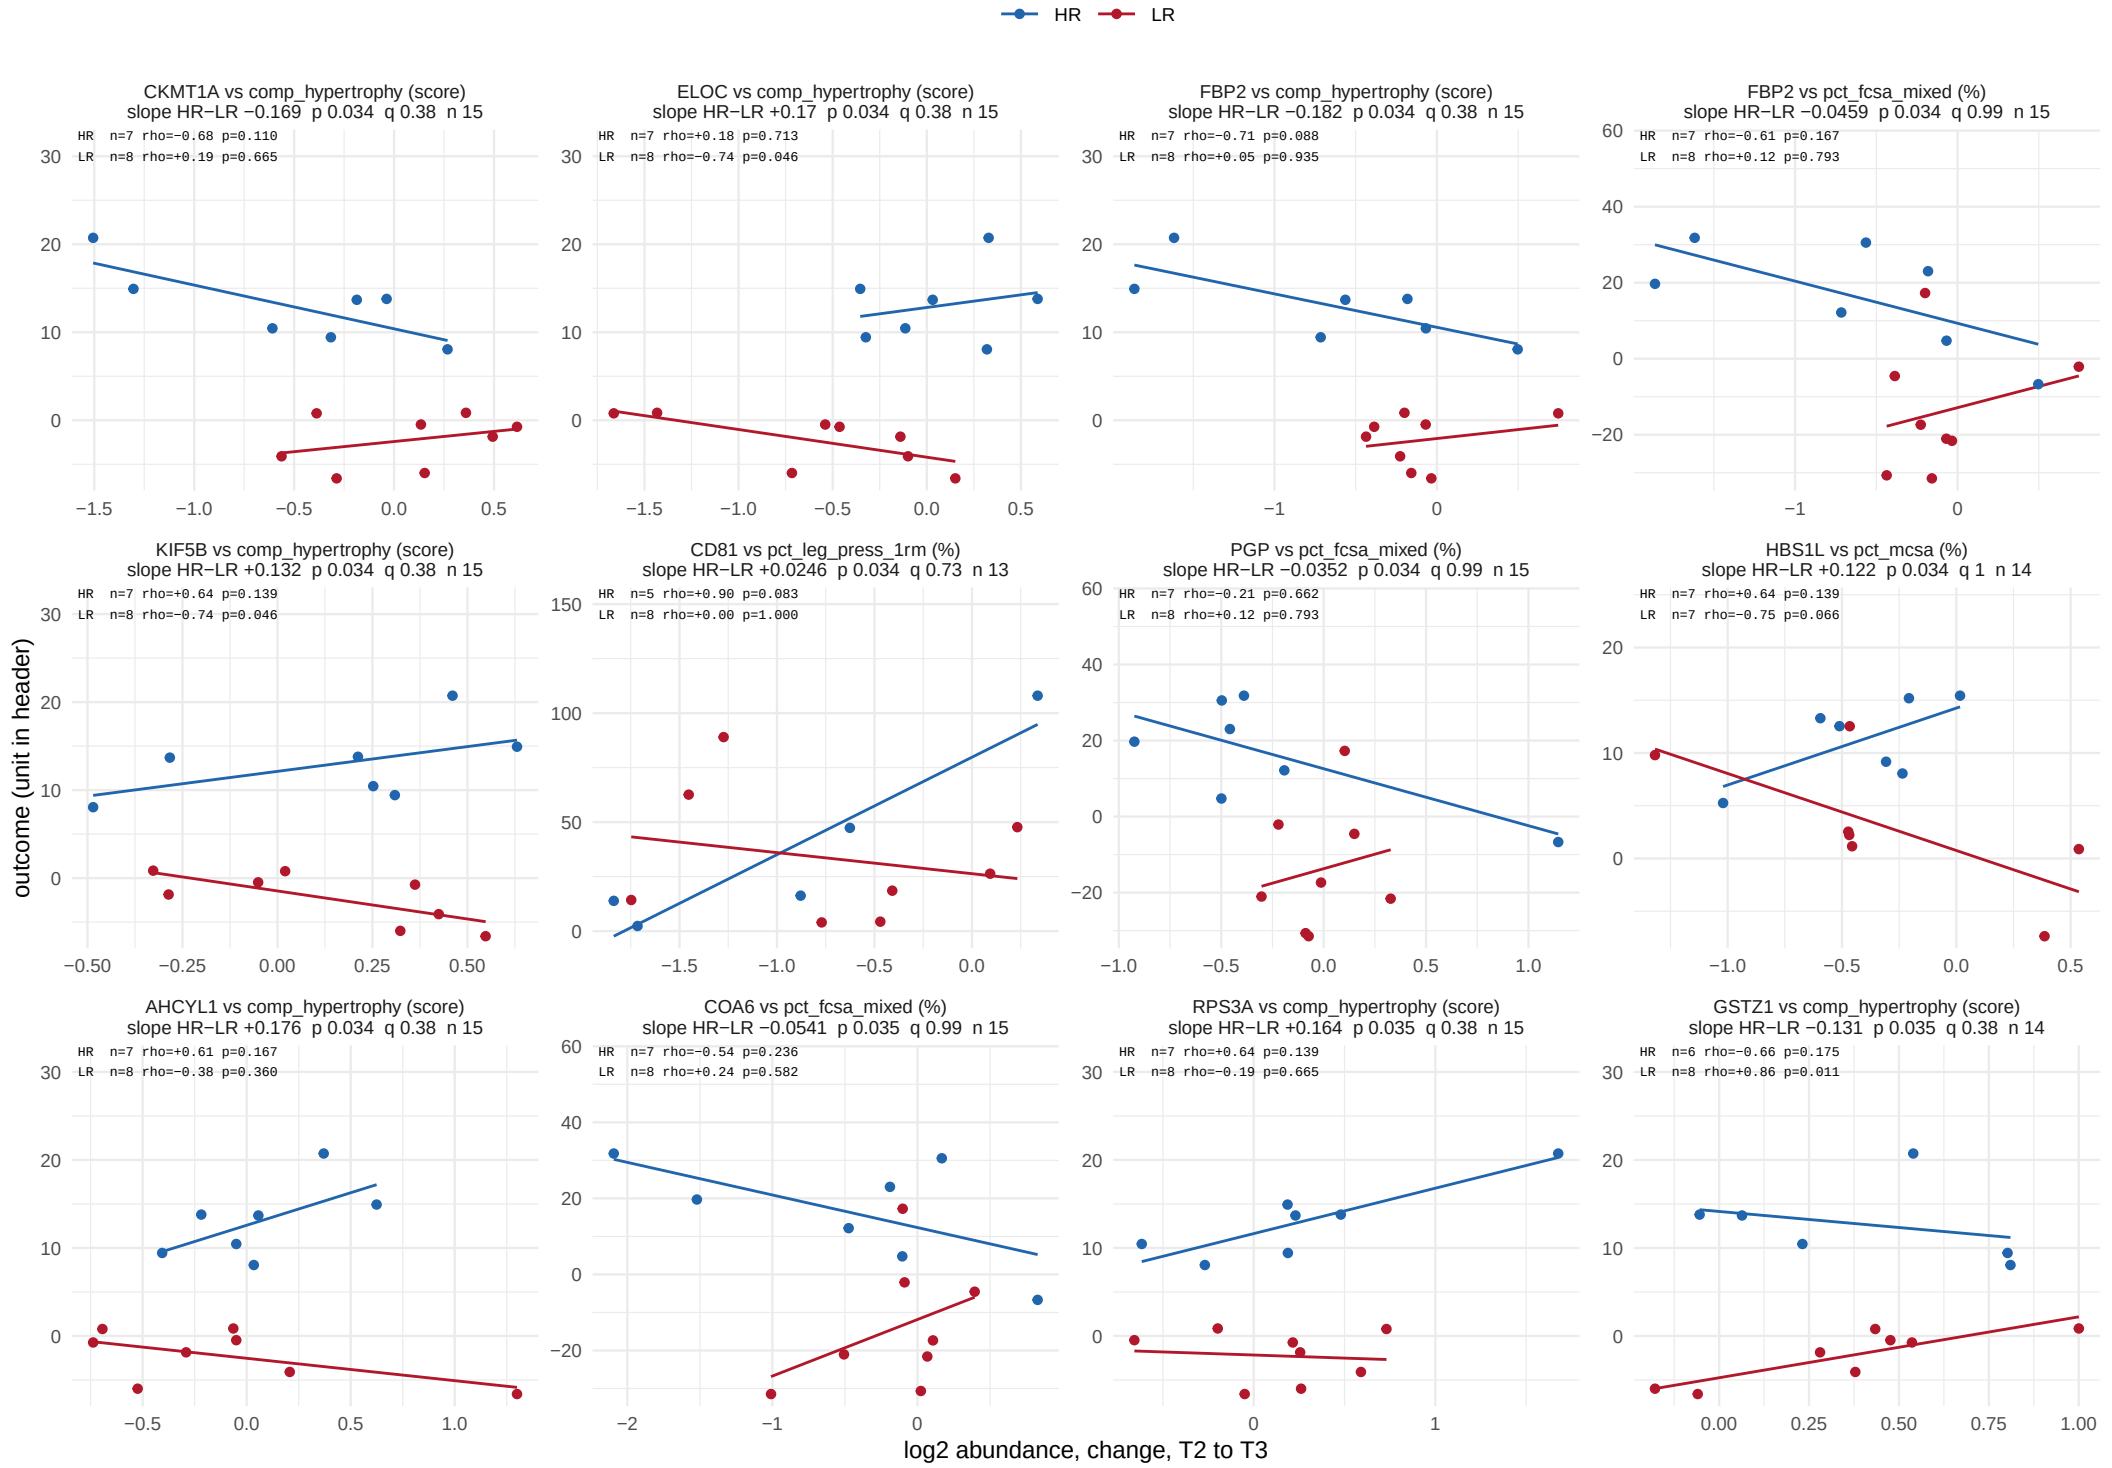

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


670 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 40 of 56.

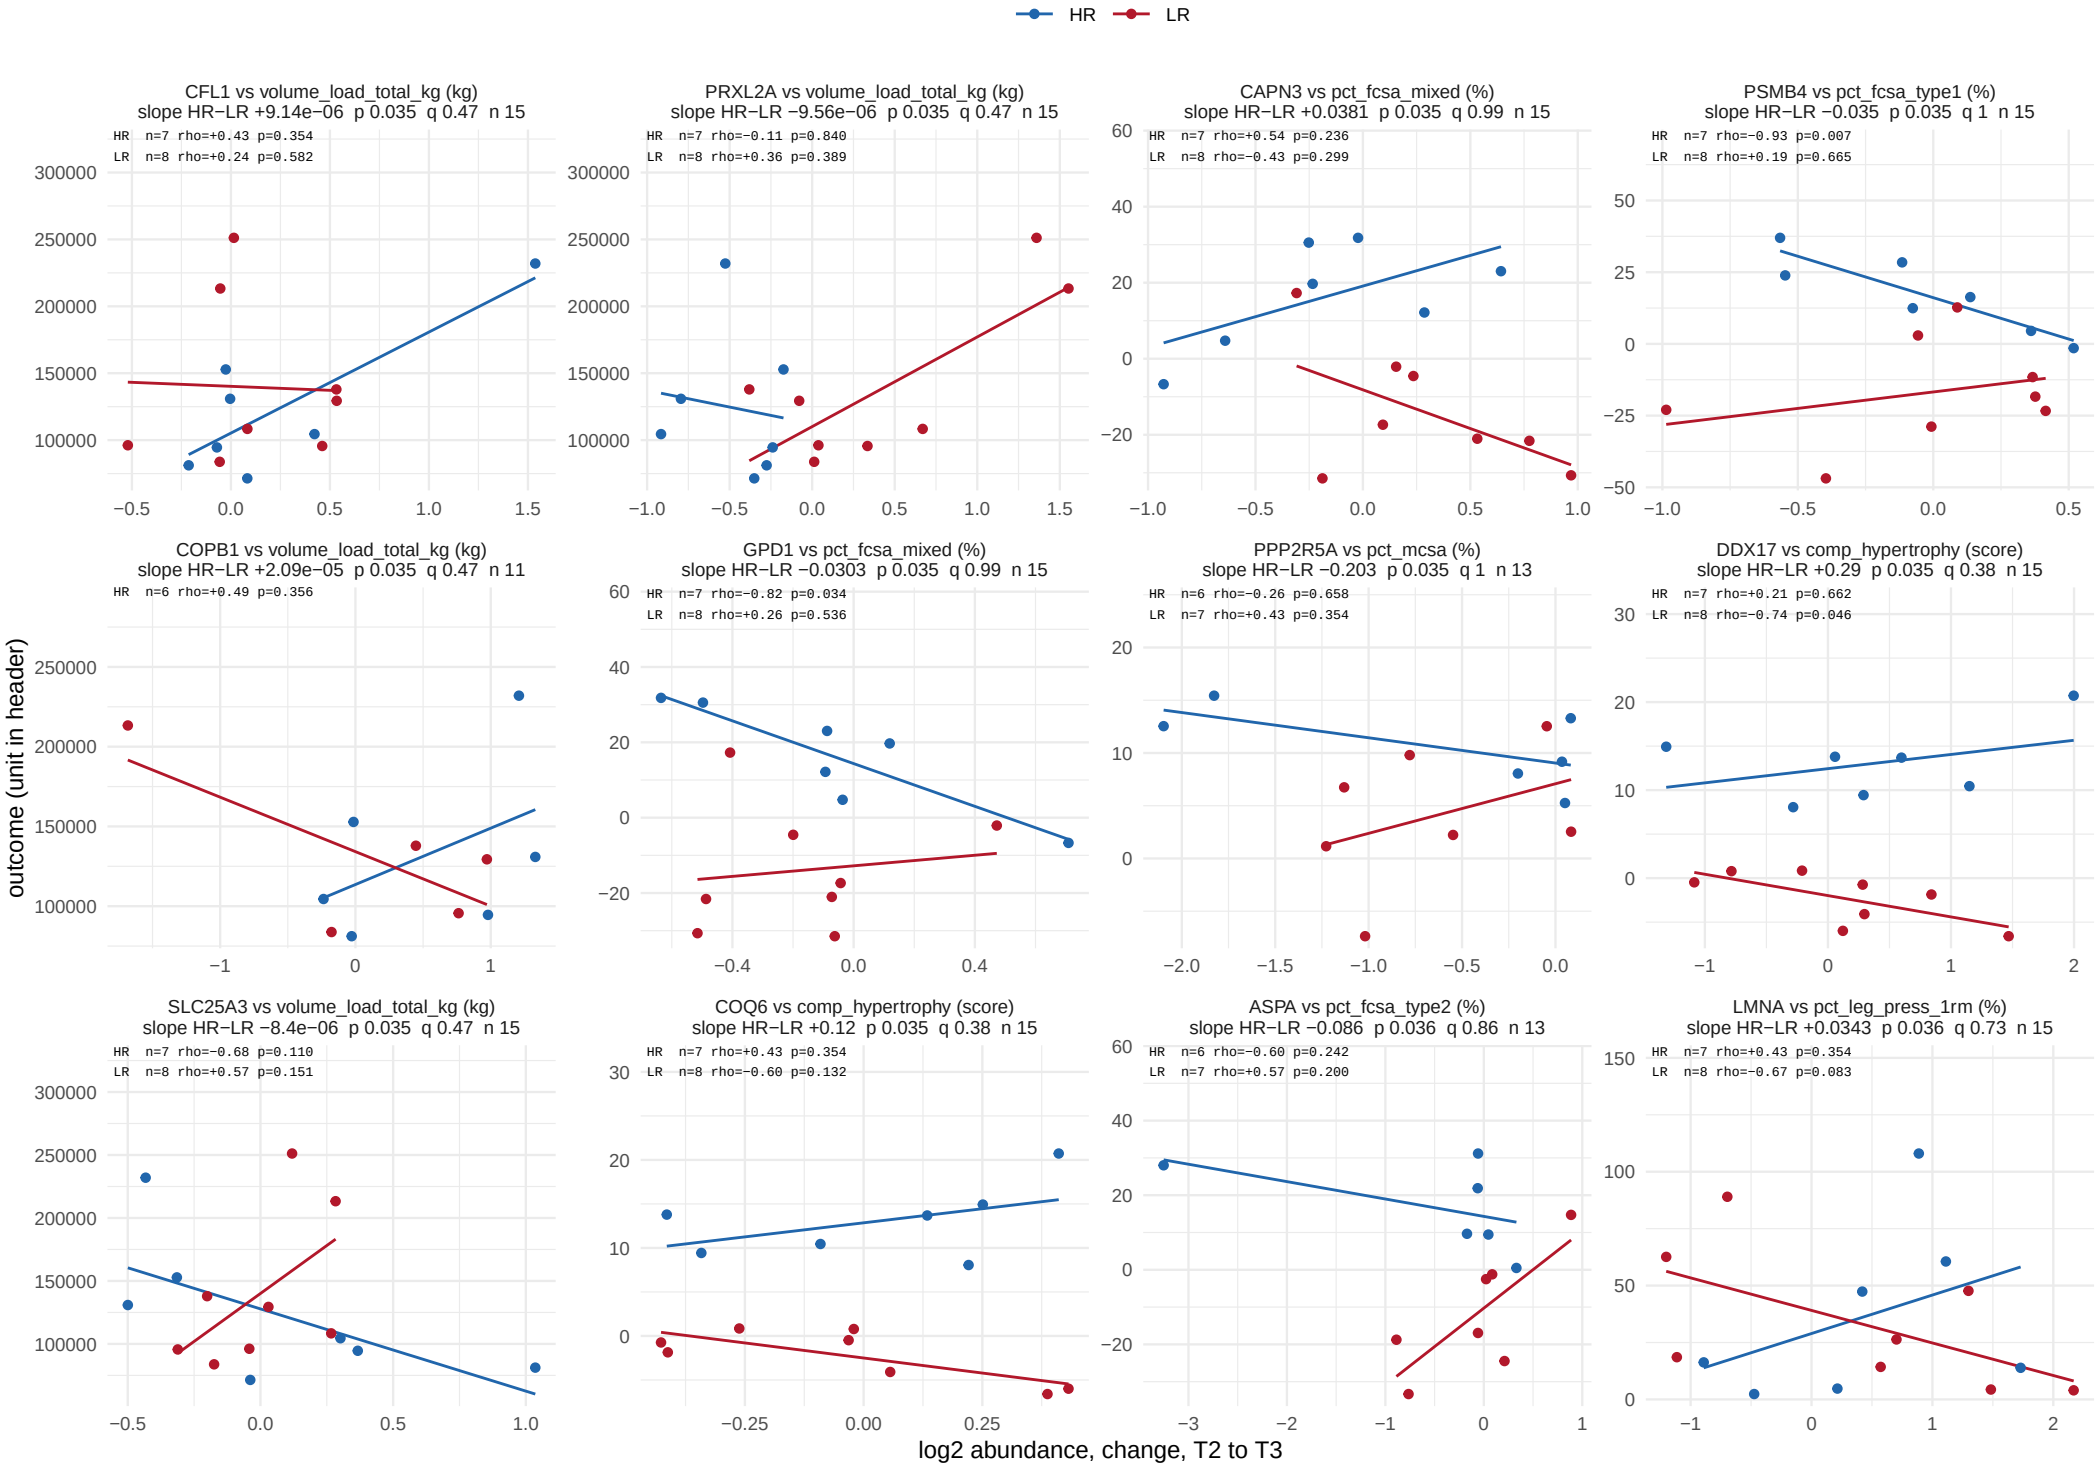

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


670 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 41 of 56.

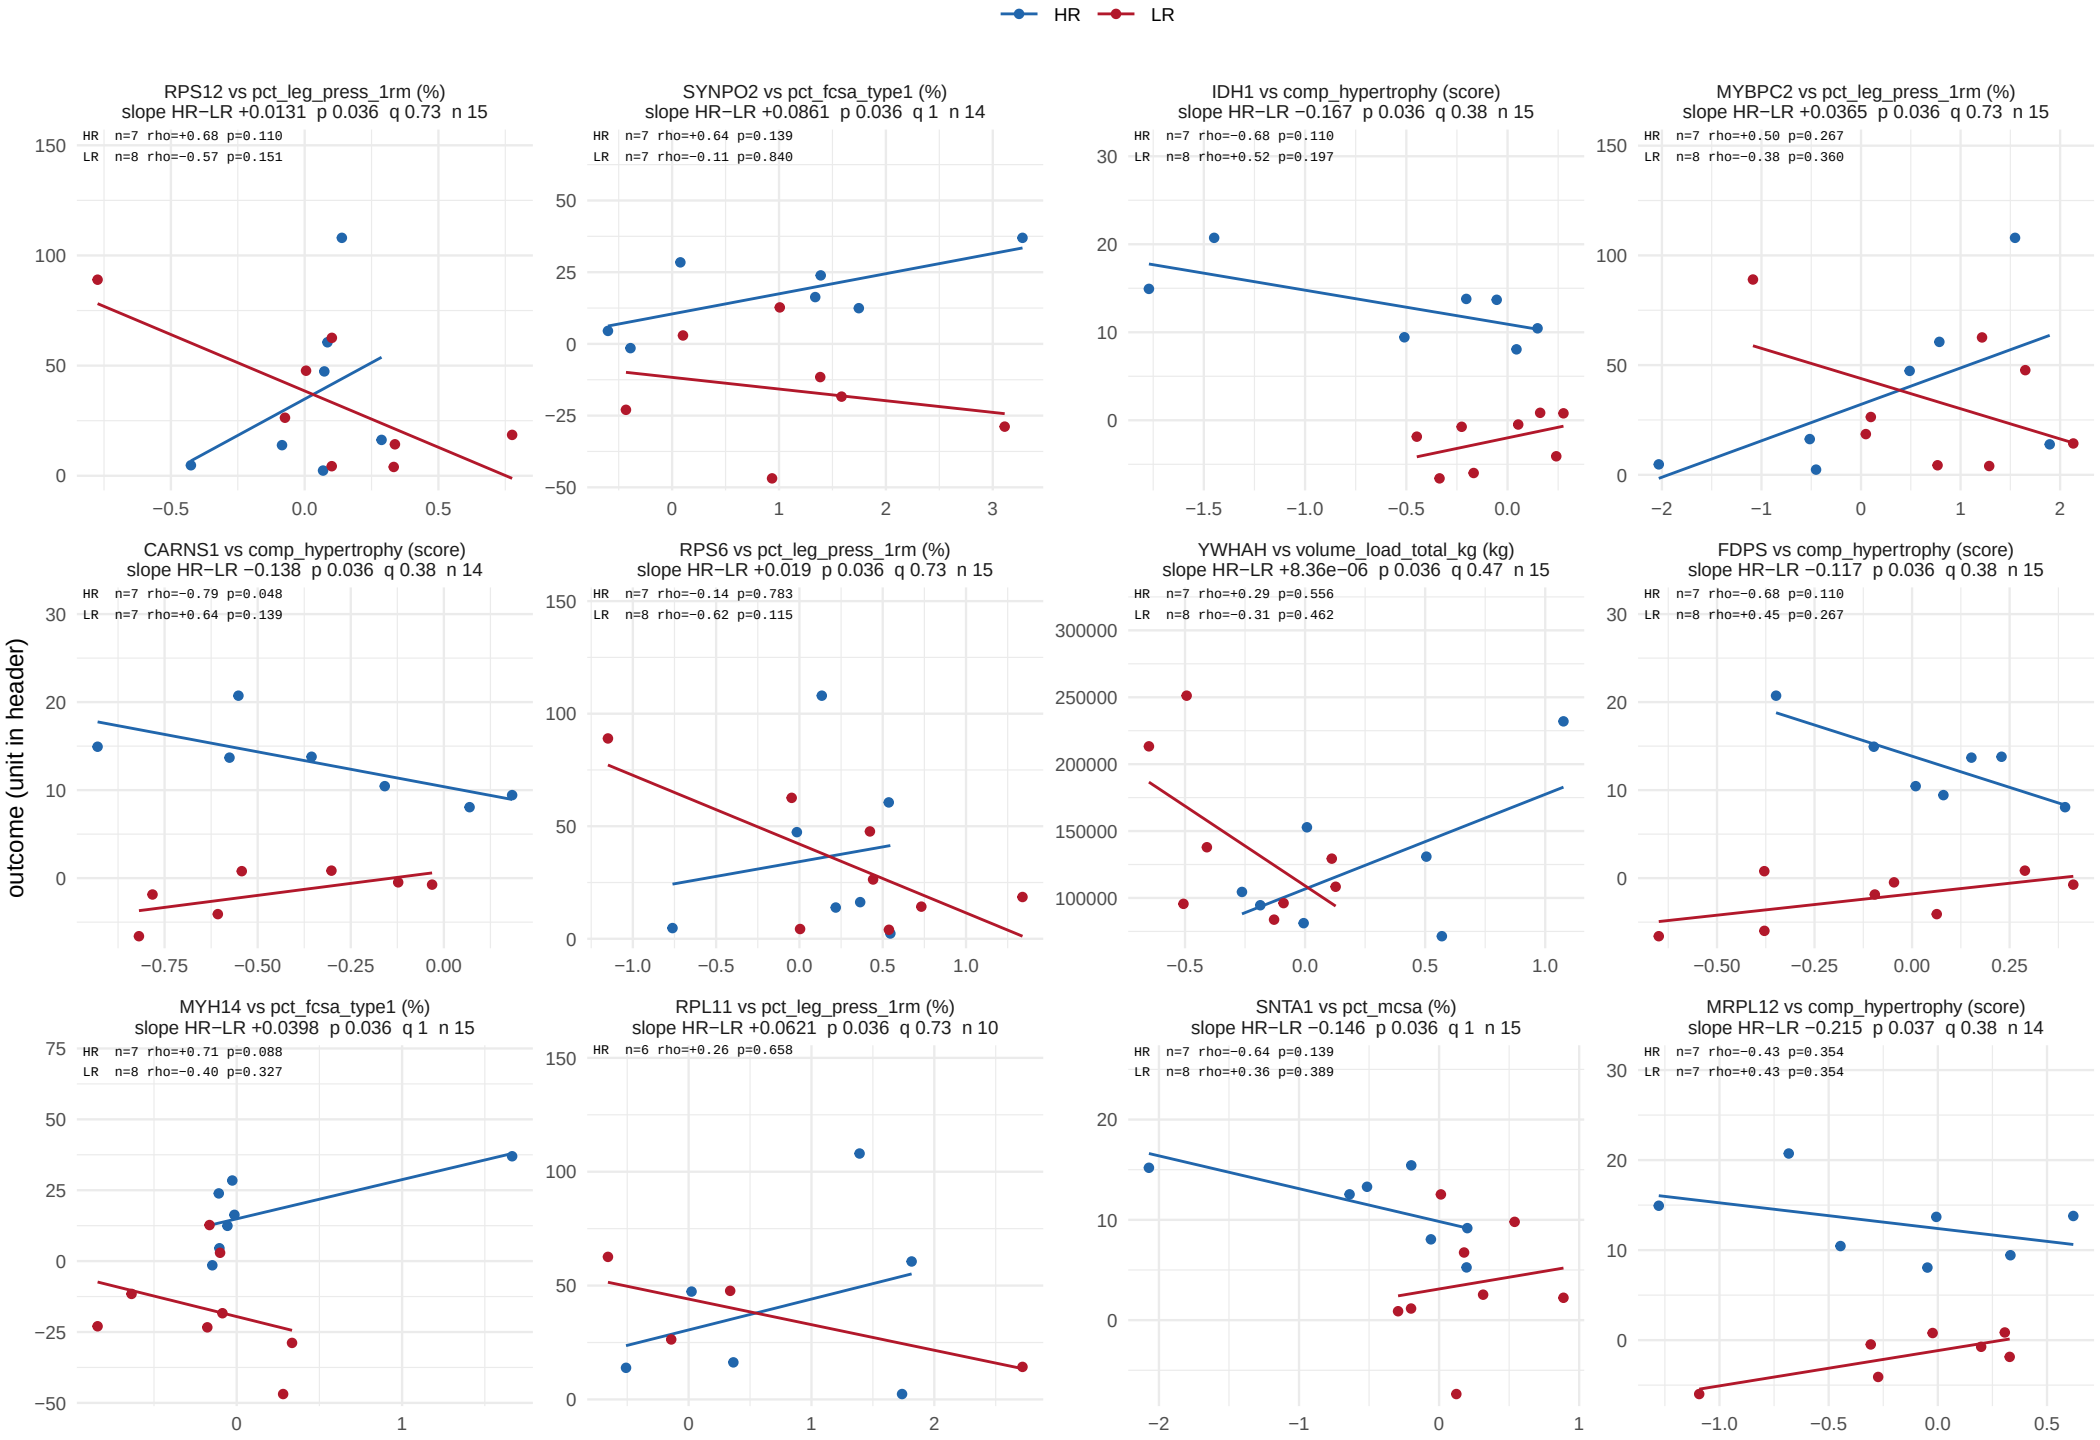

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


670 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 42 of 56.

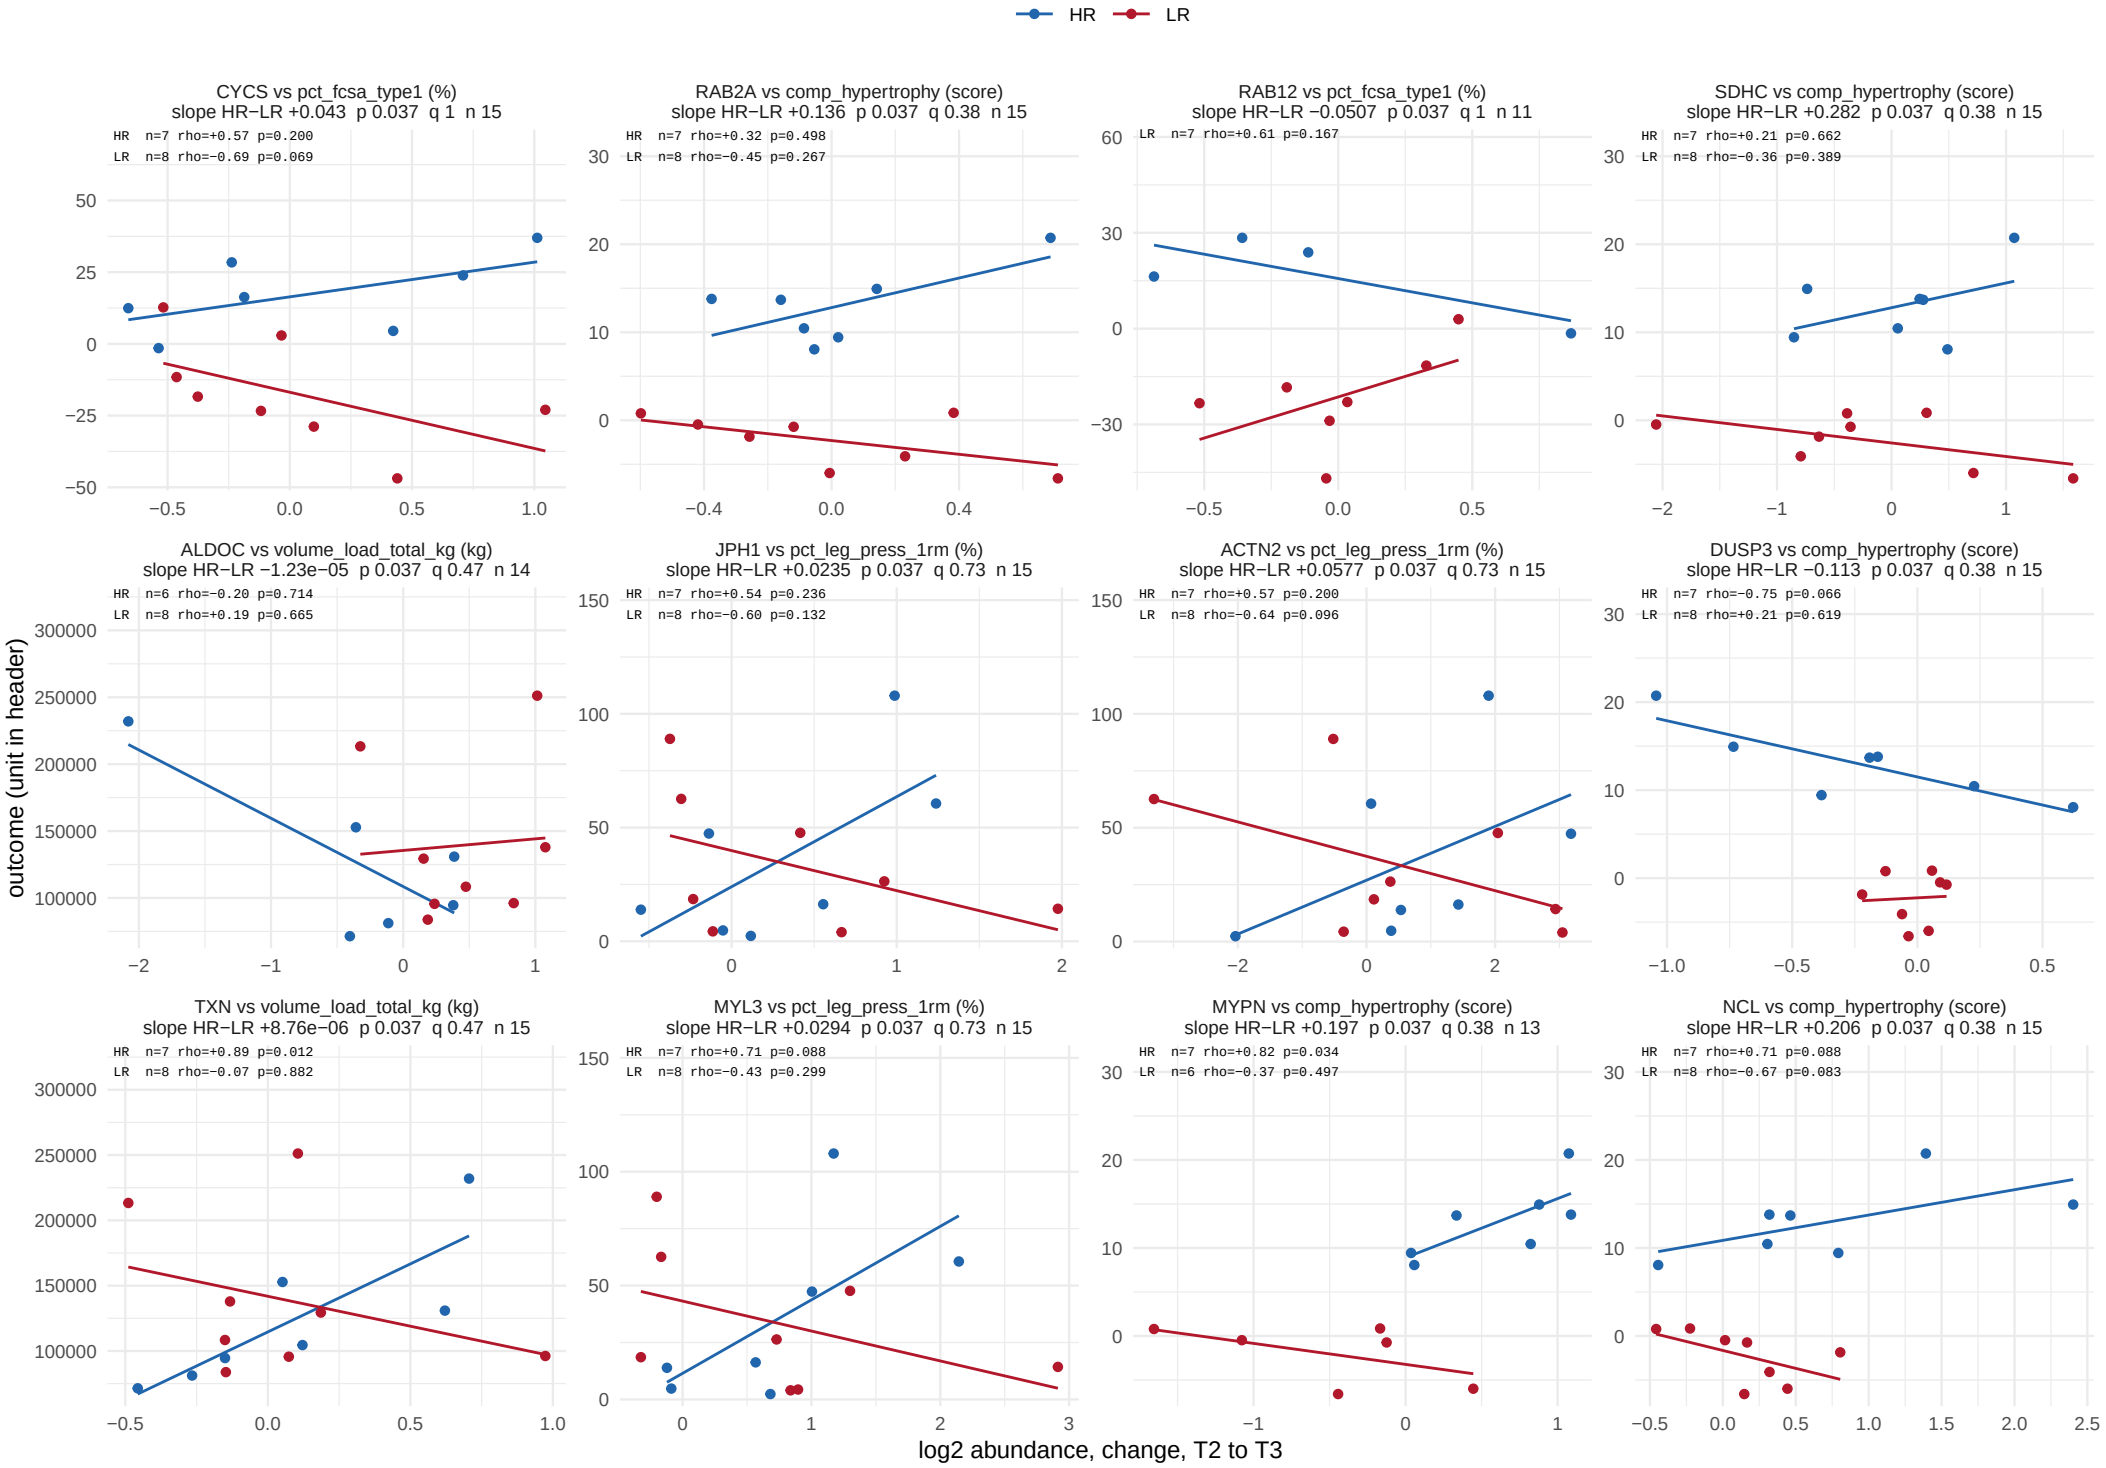

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


670 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 43 of 56.

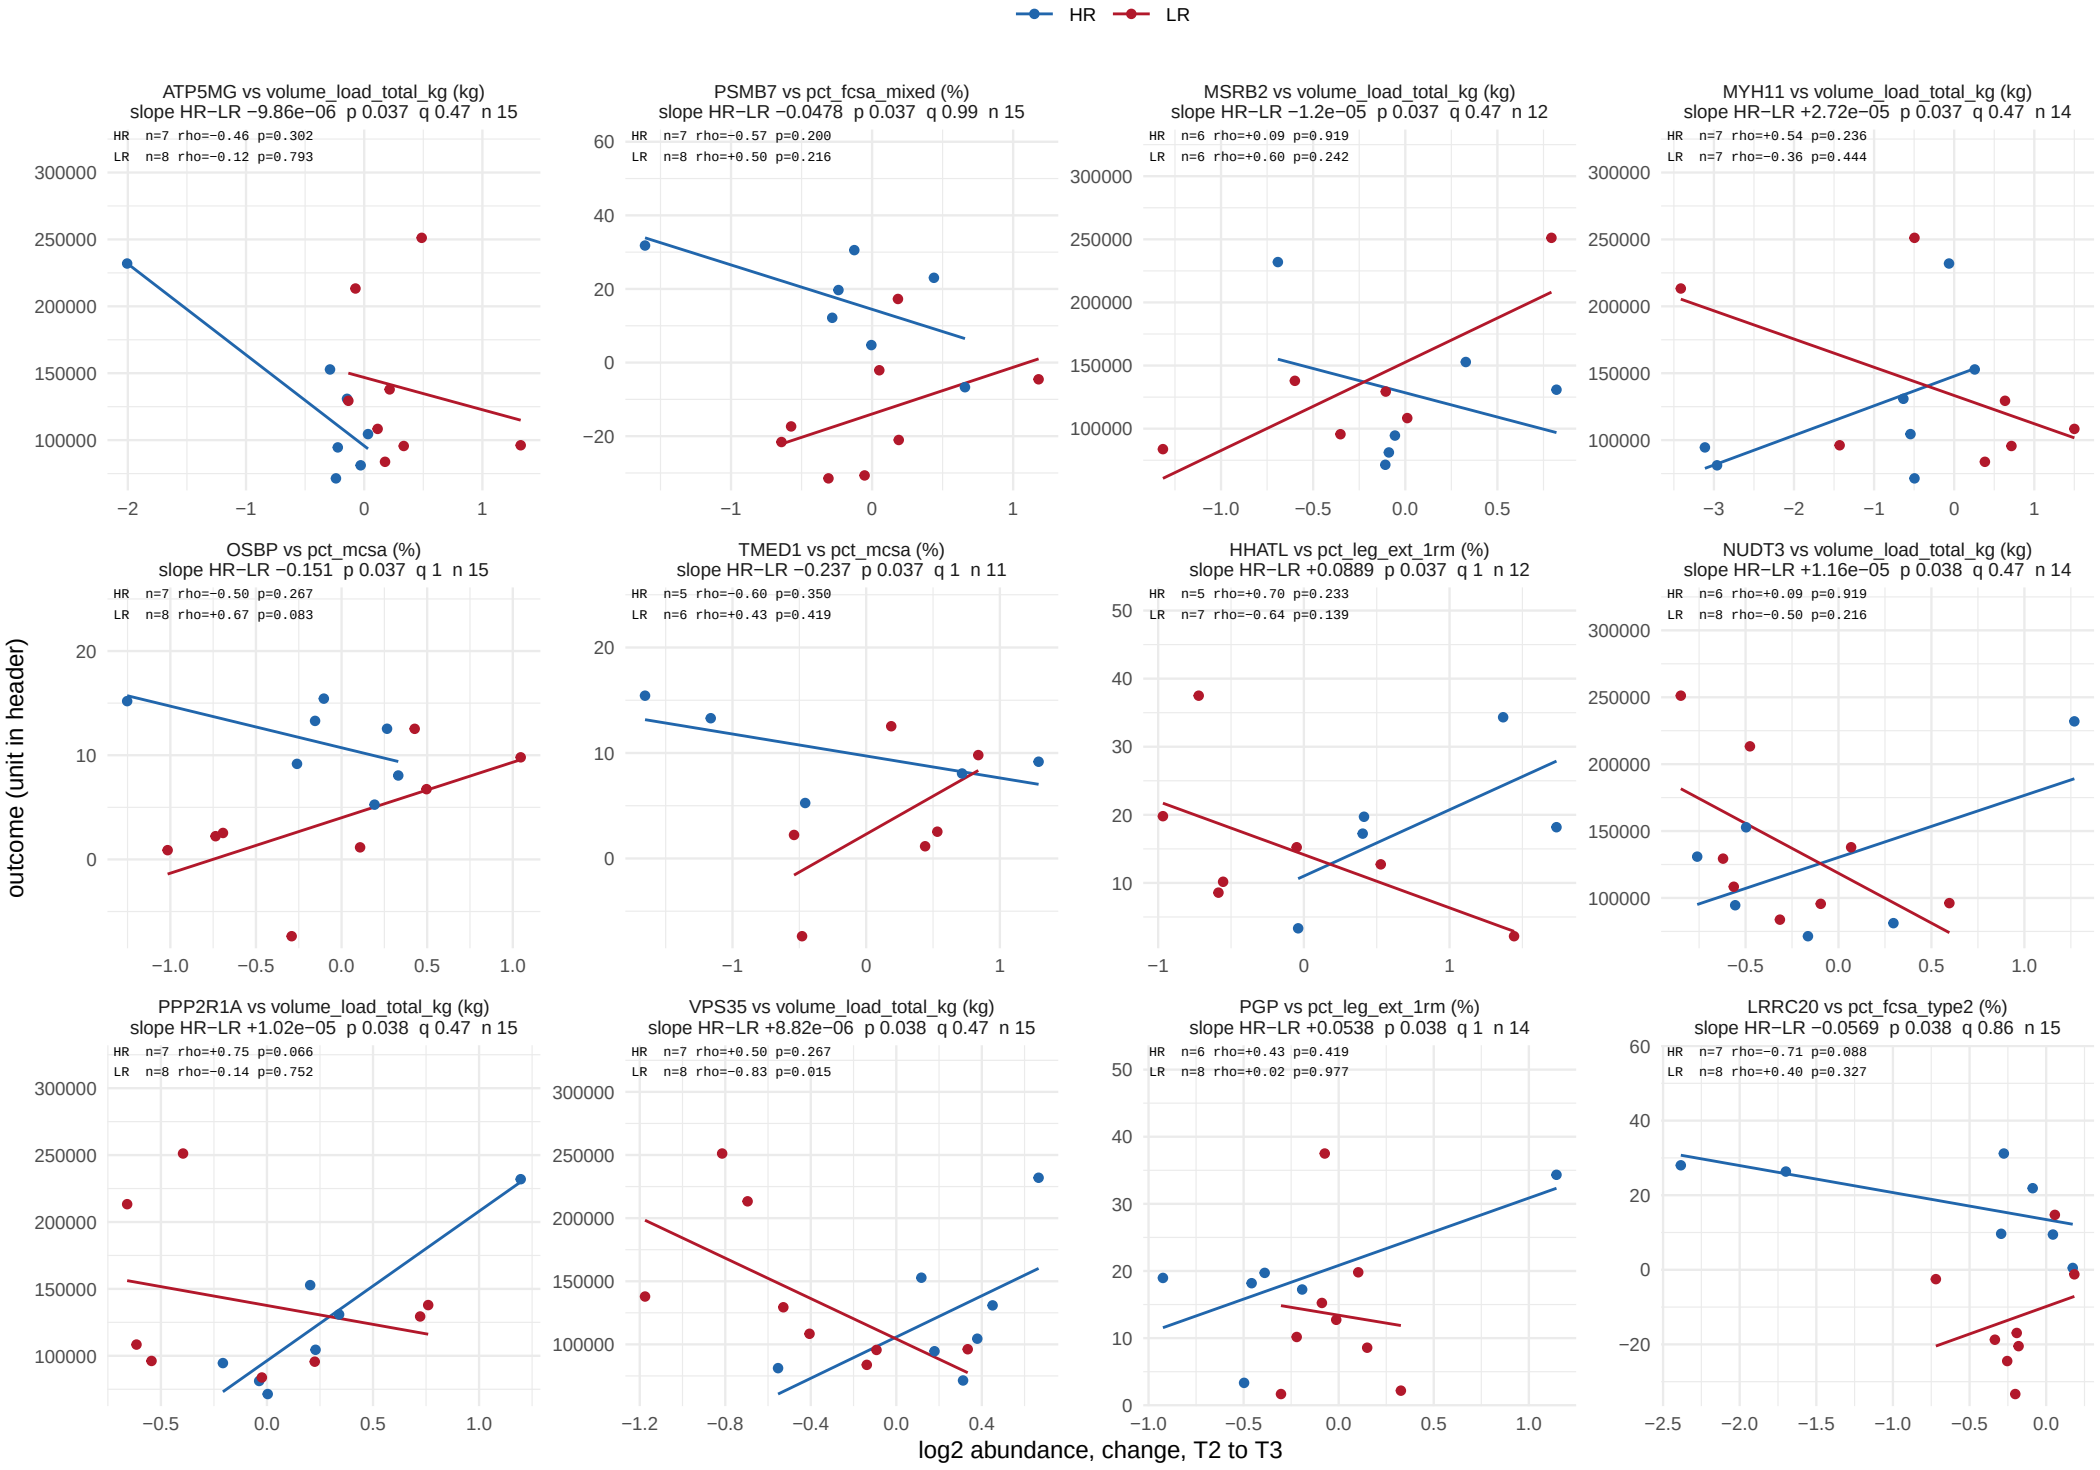

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


670 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 44 of 56.

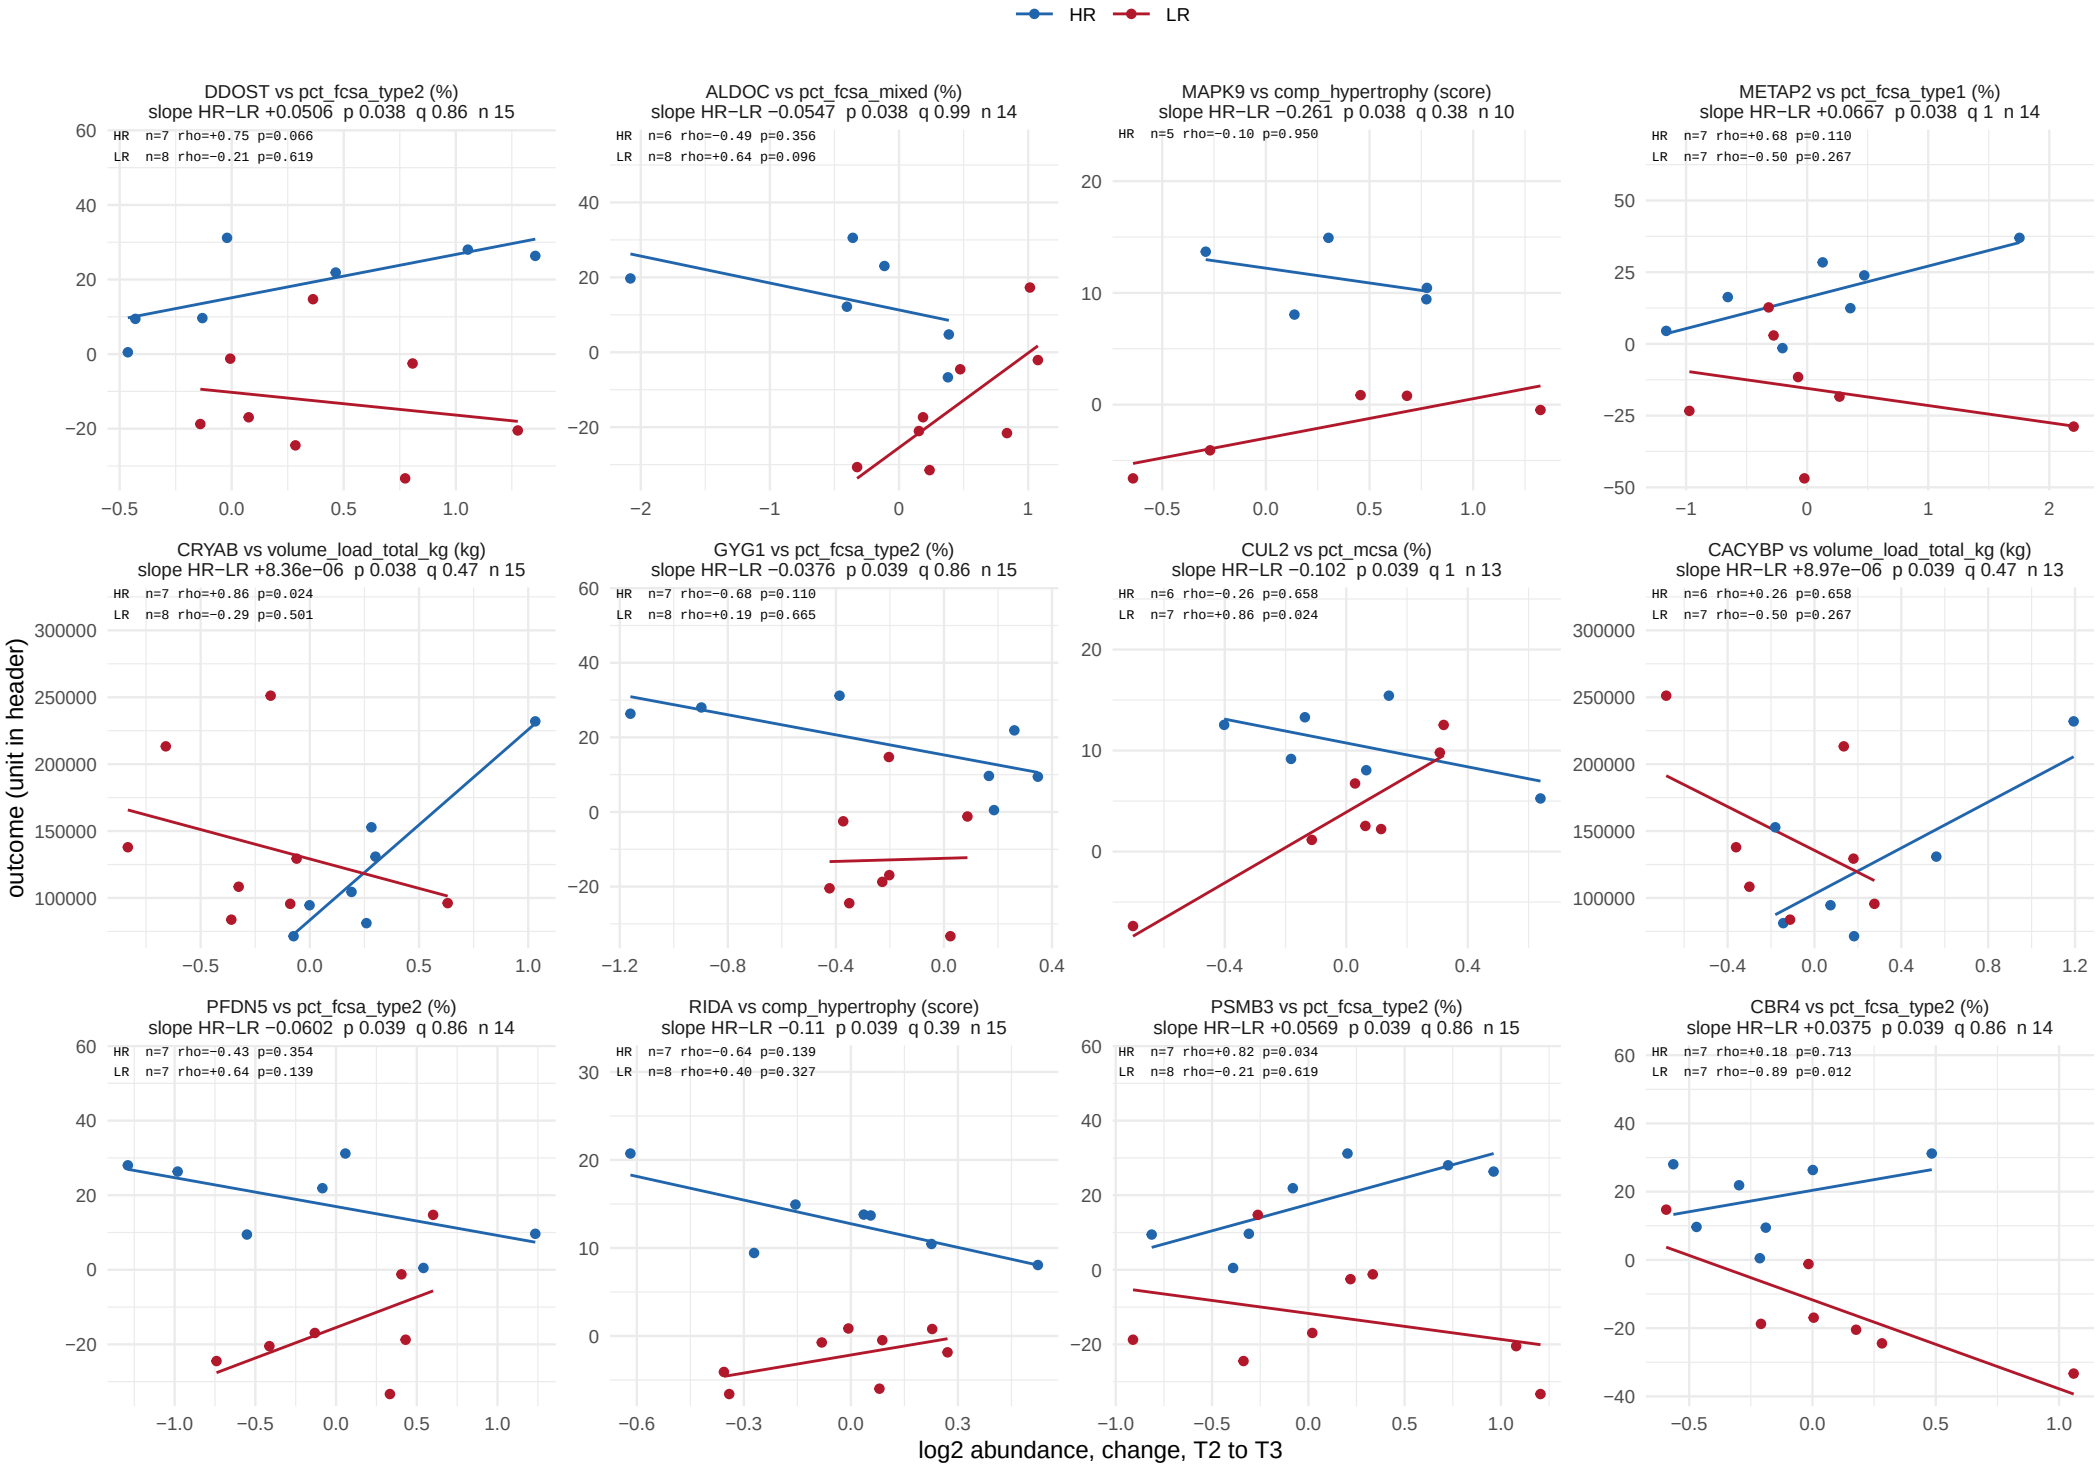

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


670 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 45 of 56.

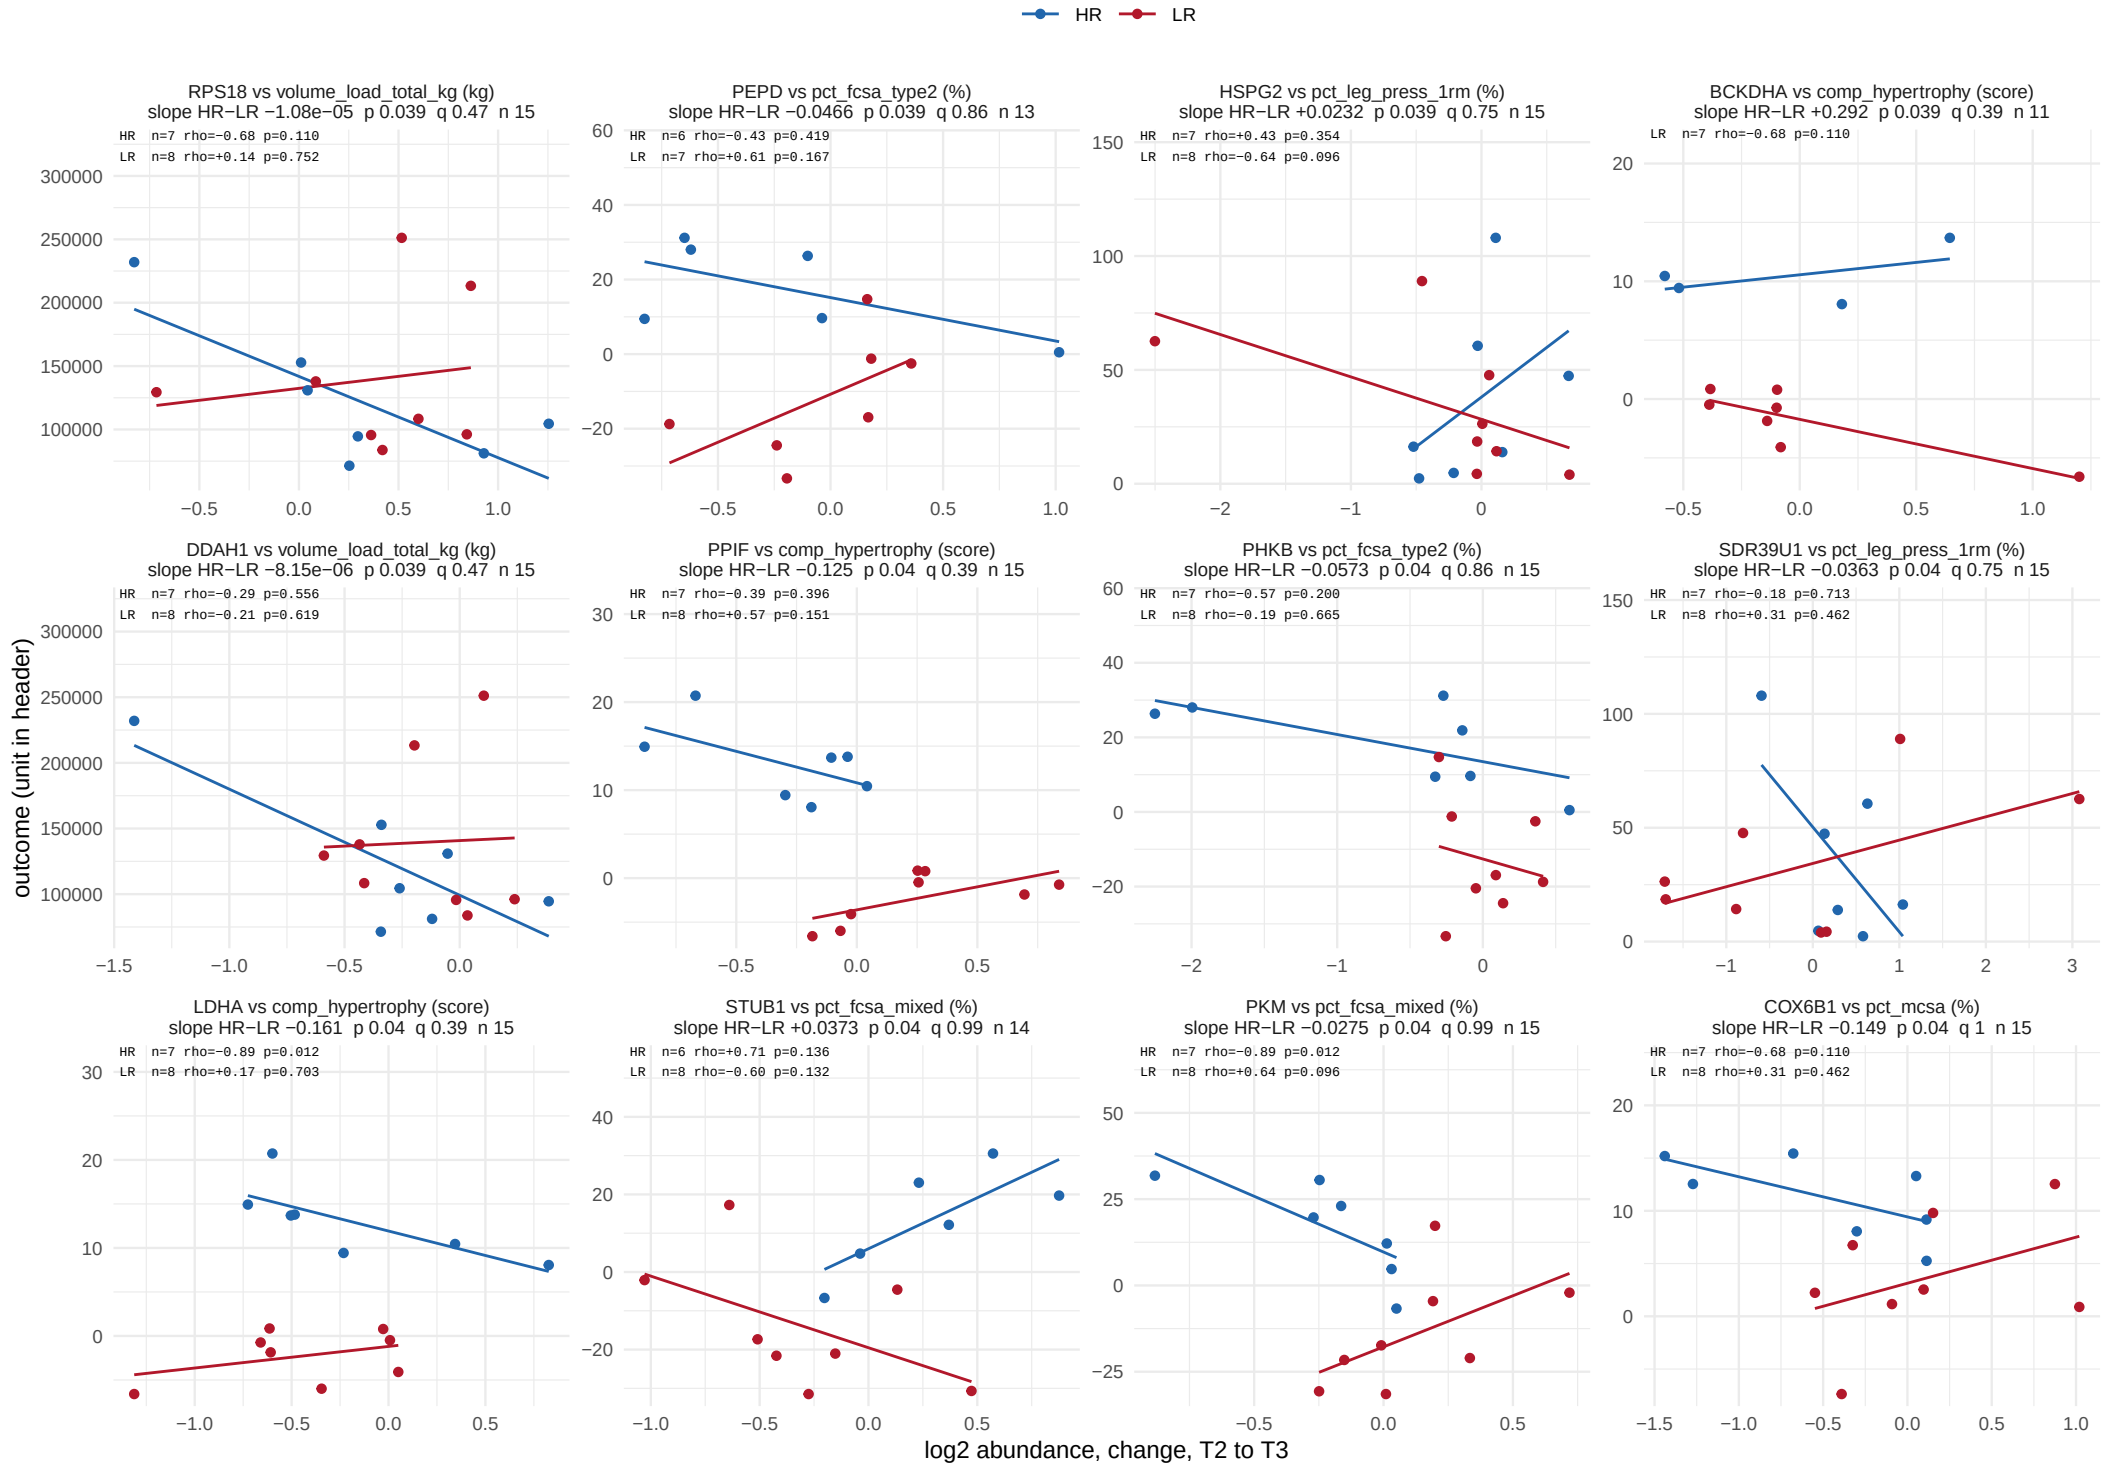

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


670 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 46 of 56.

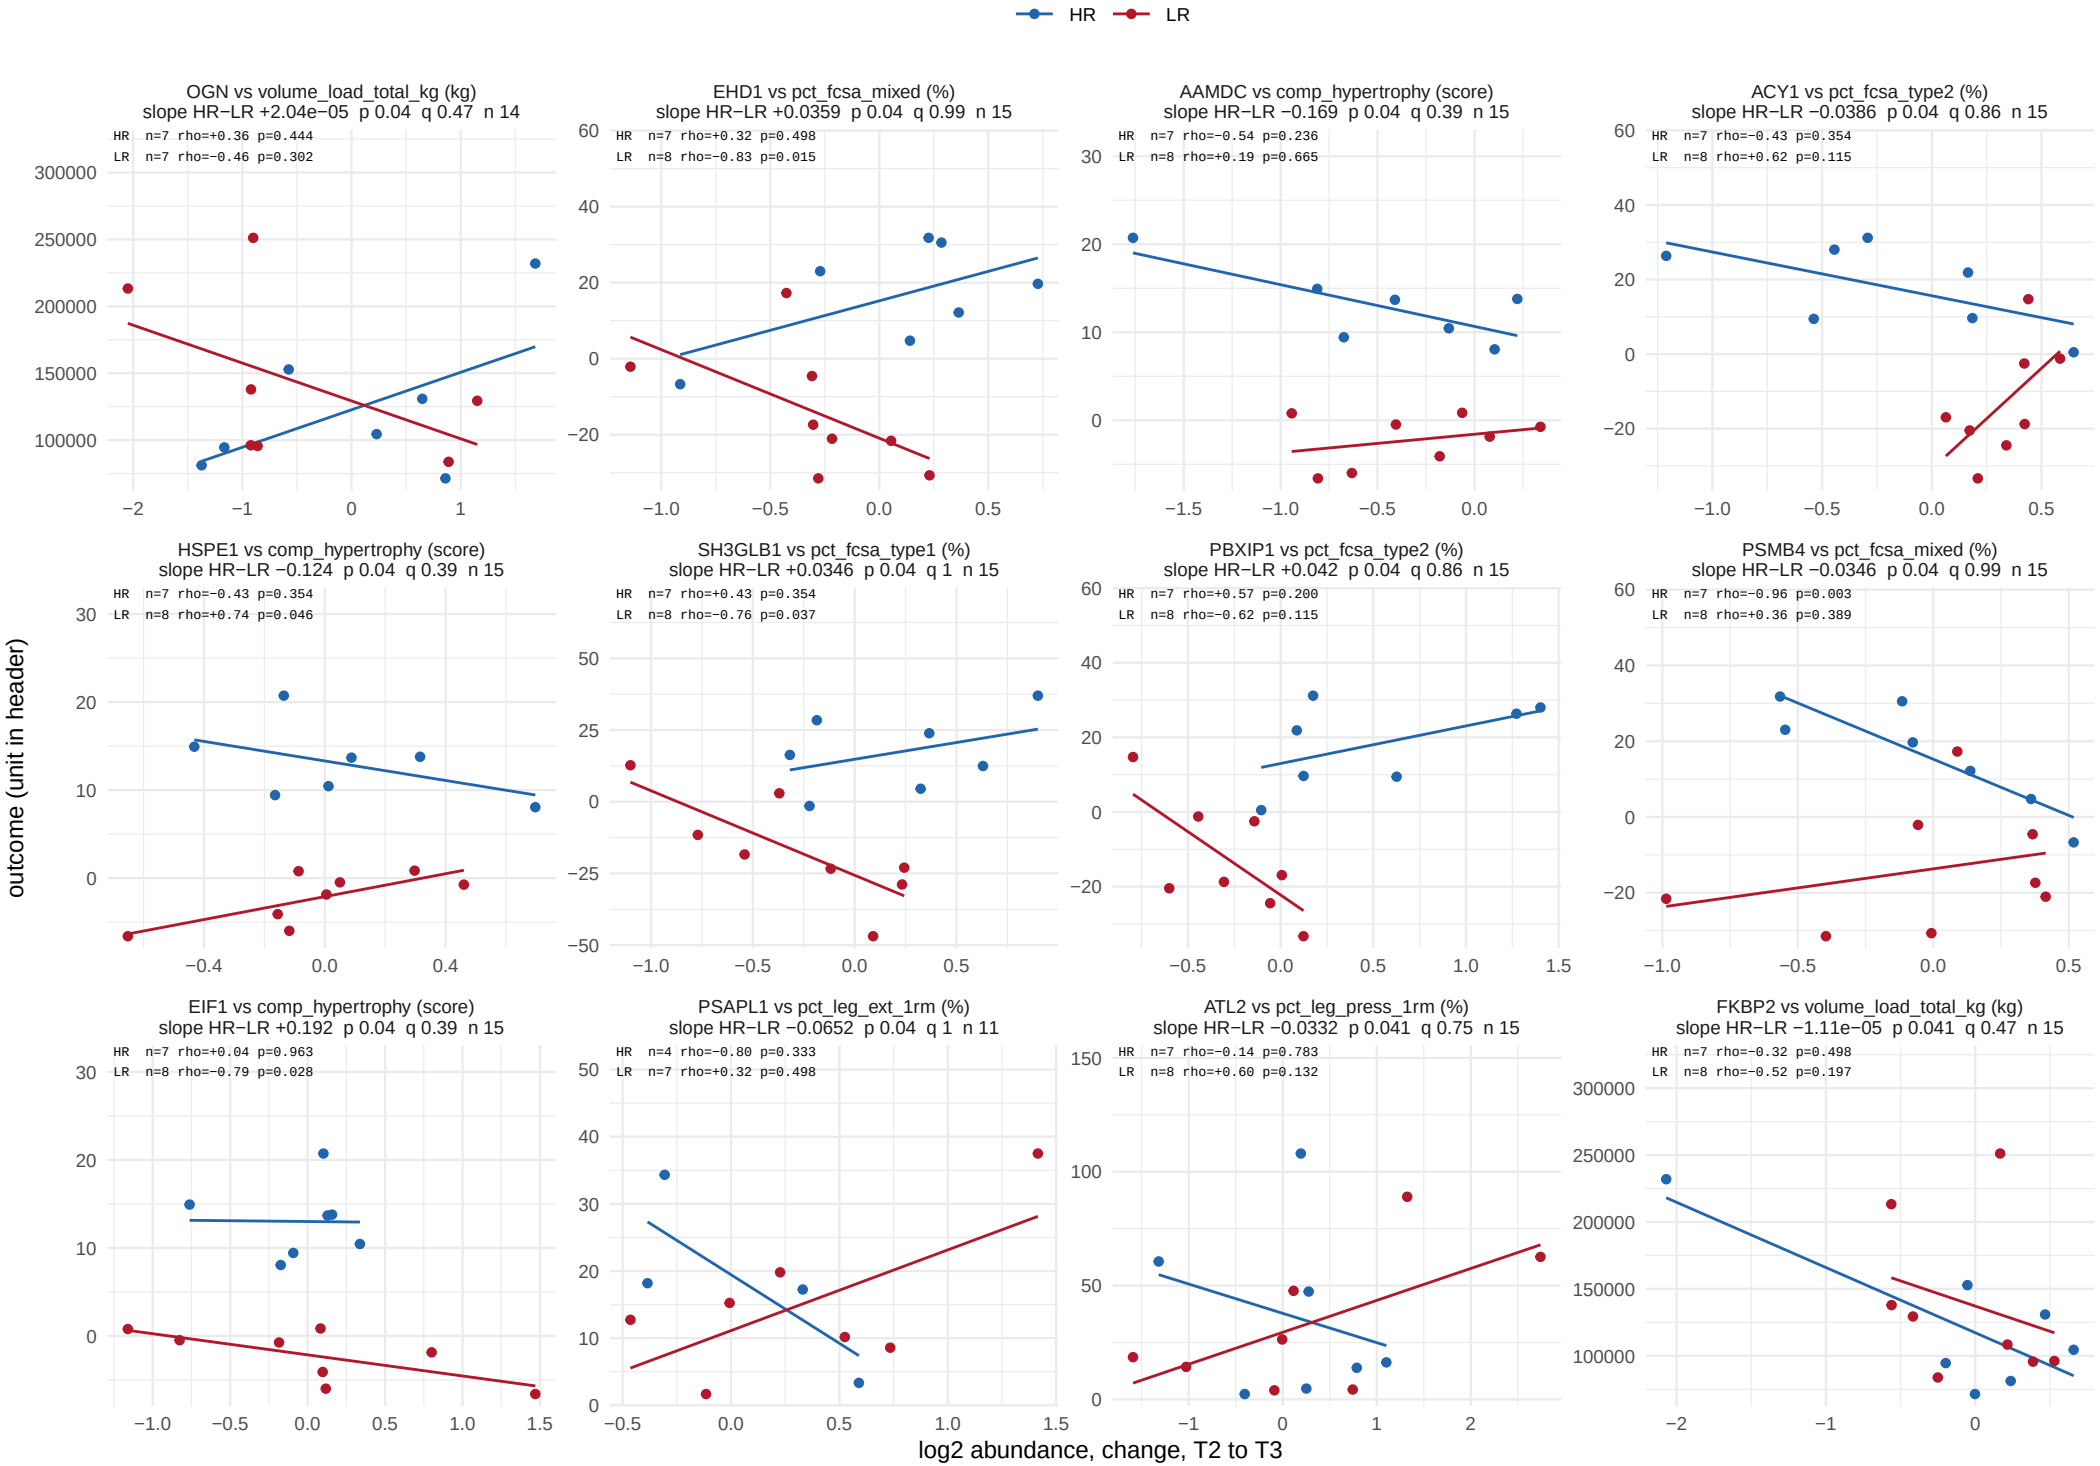

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


670 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 47 of 56.

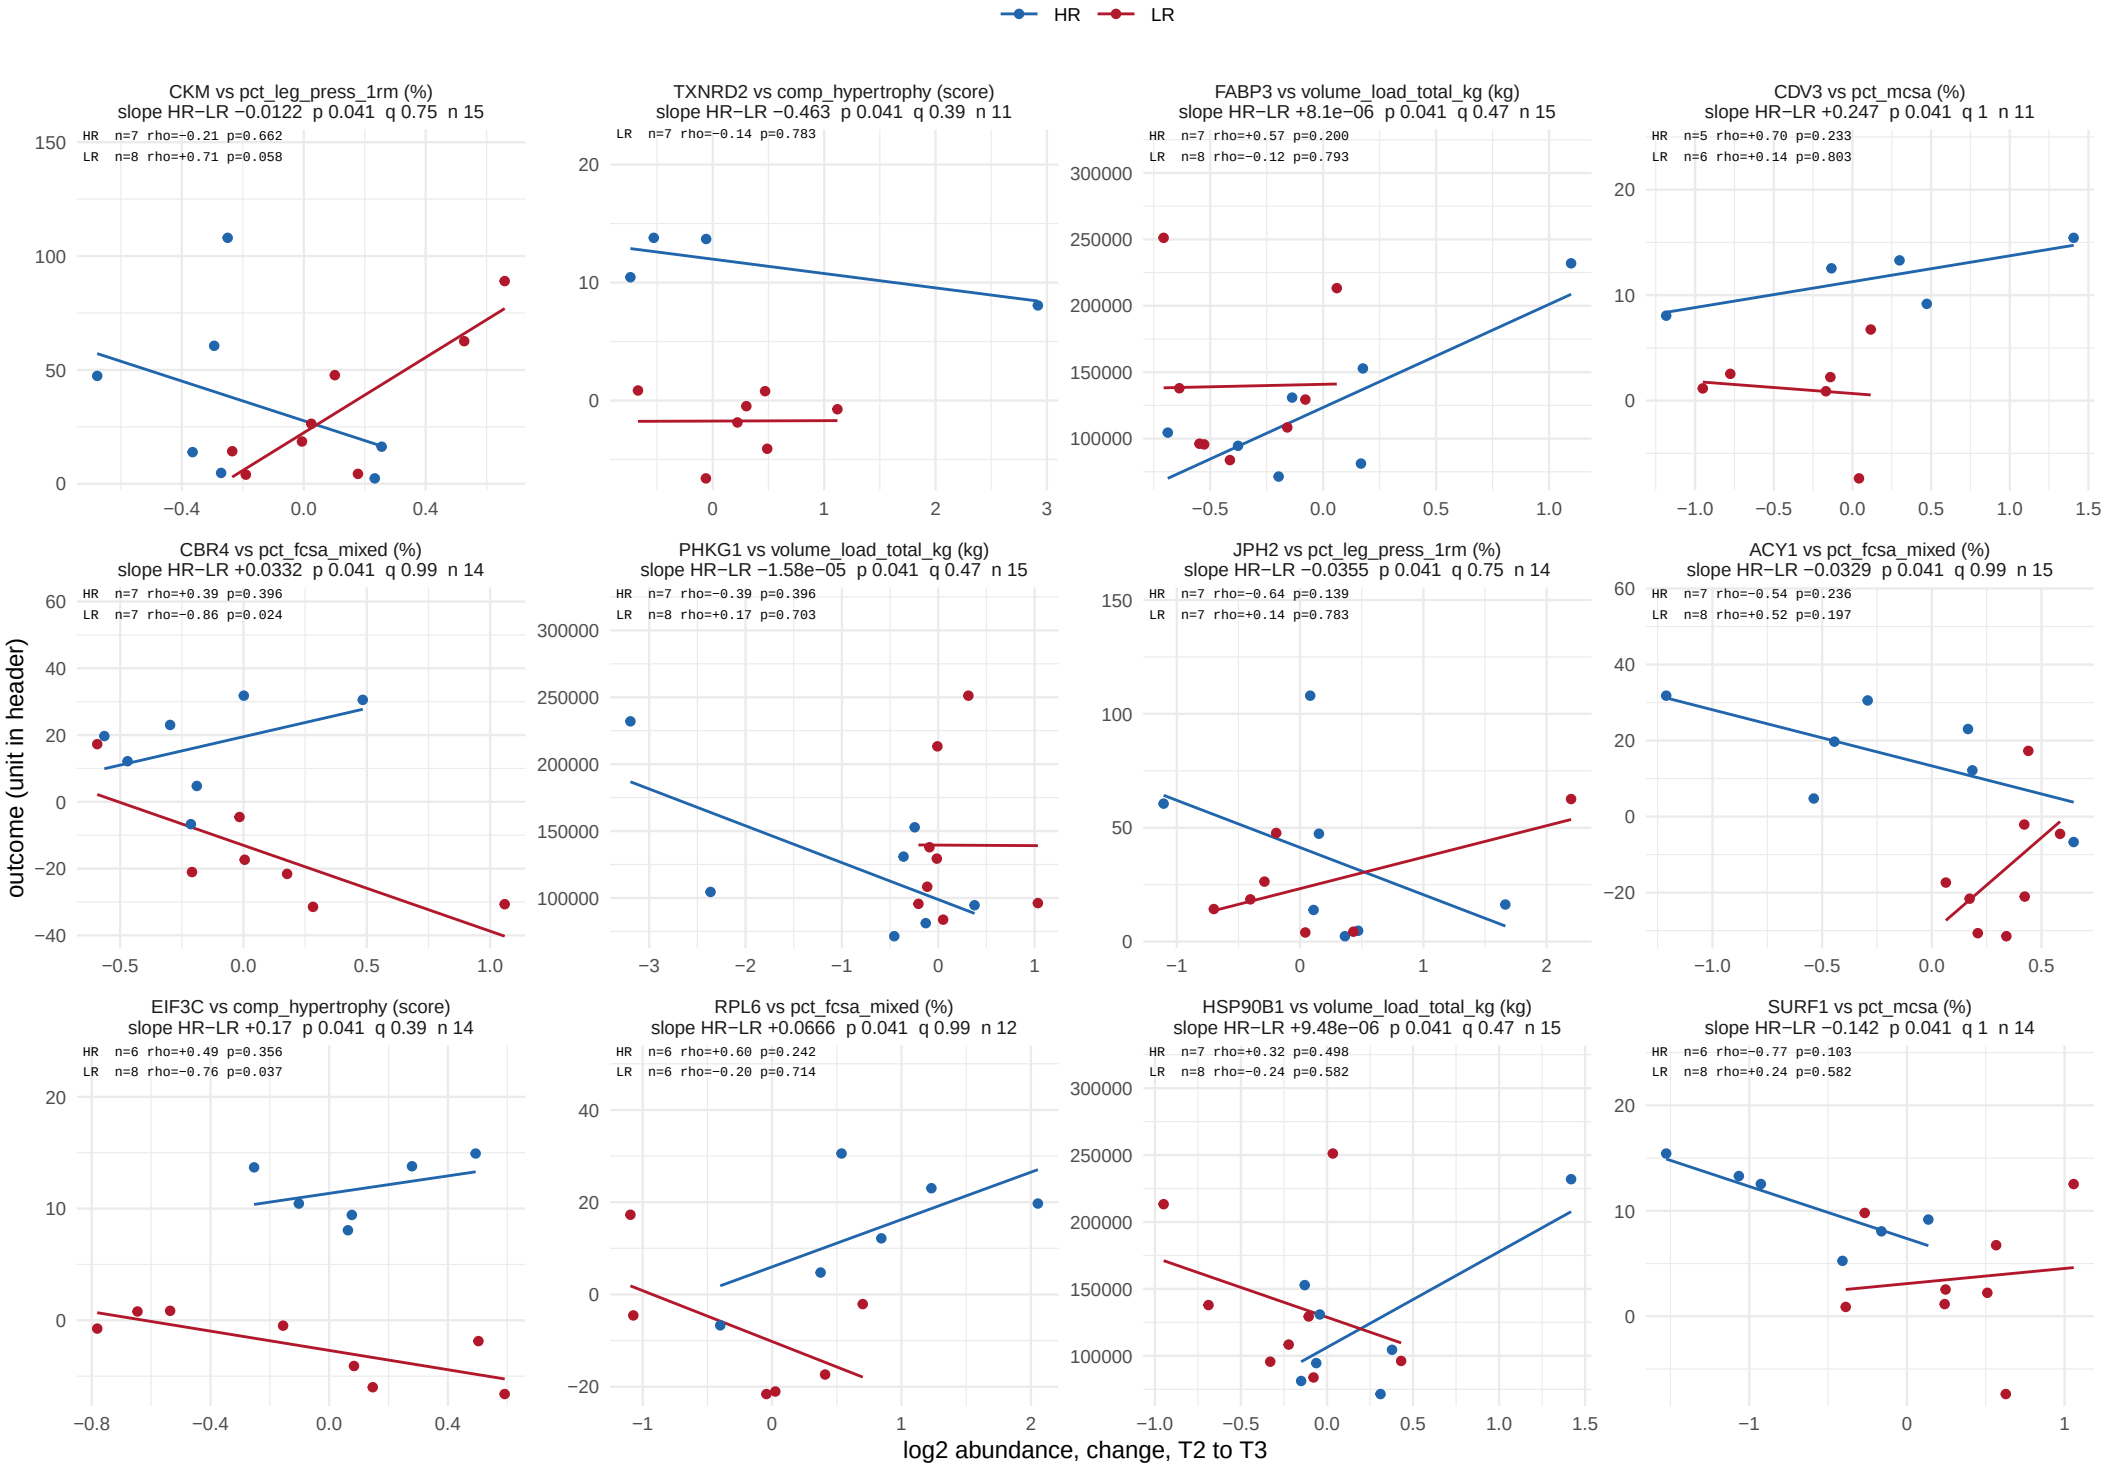

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


670 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 48 of 56.

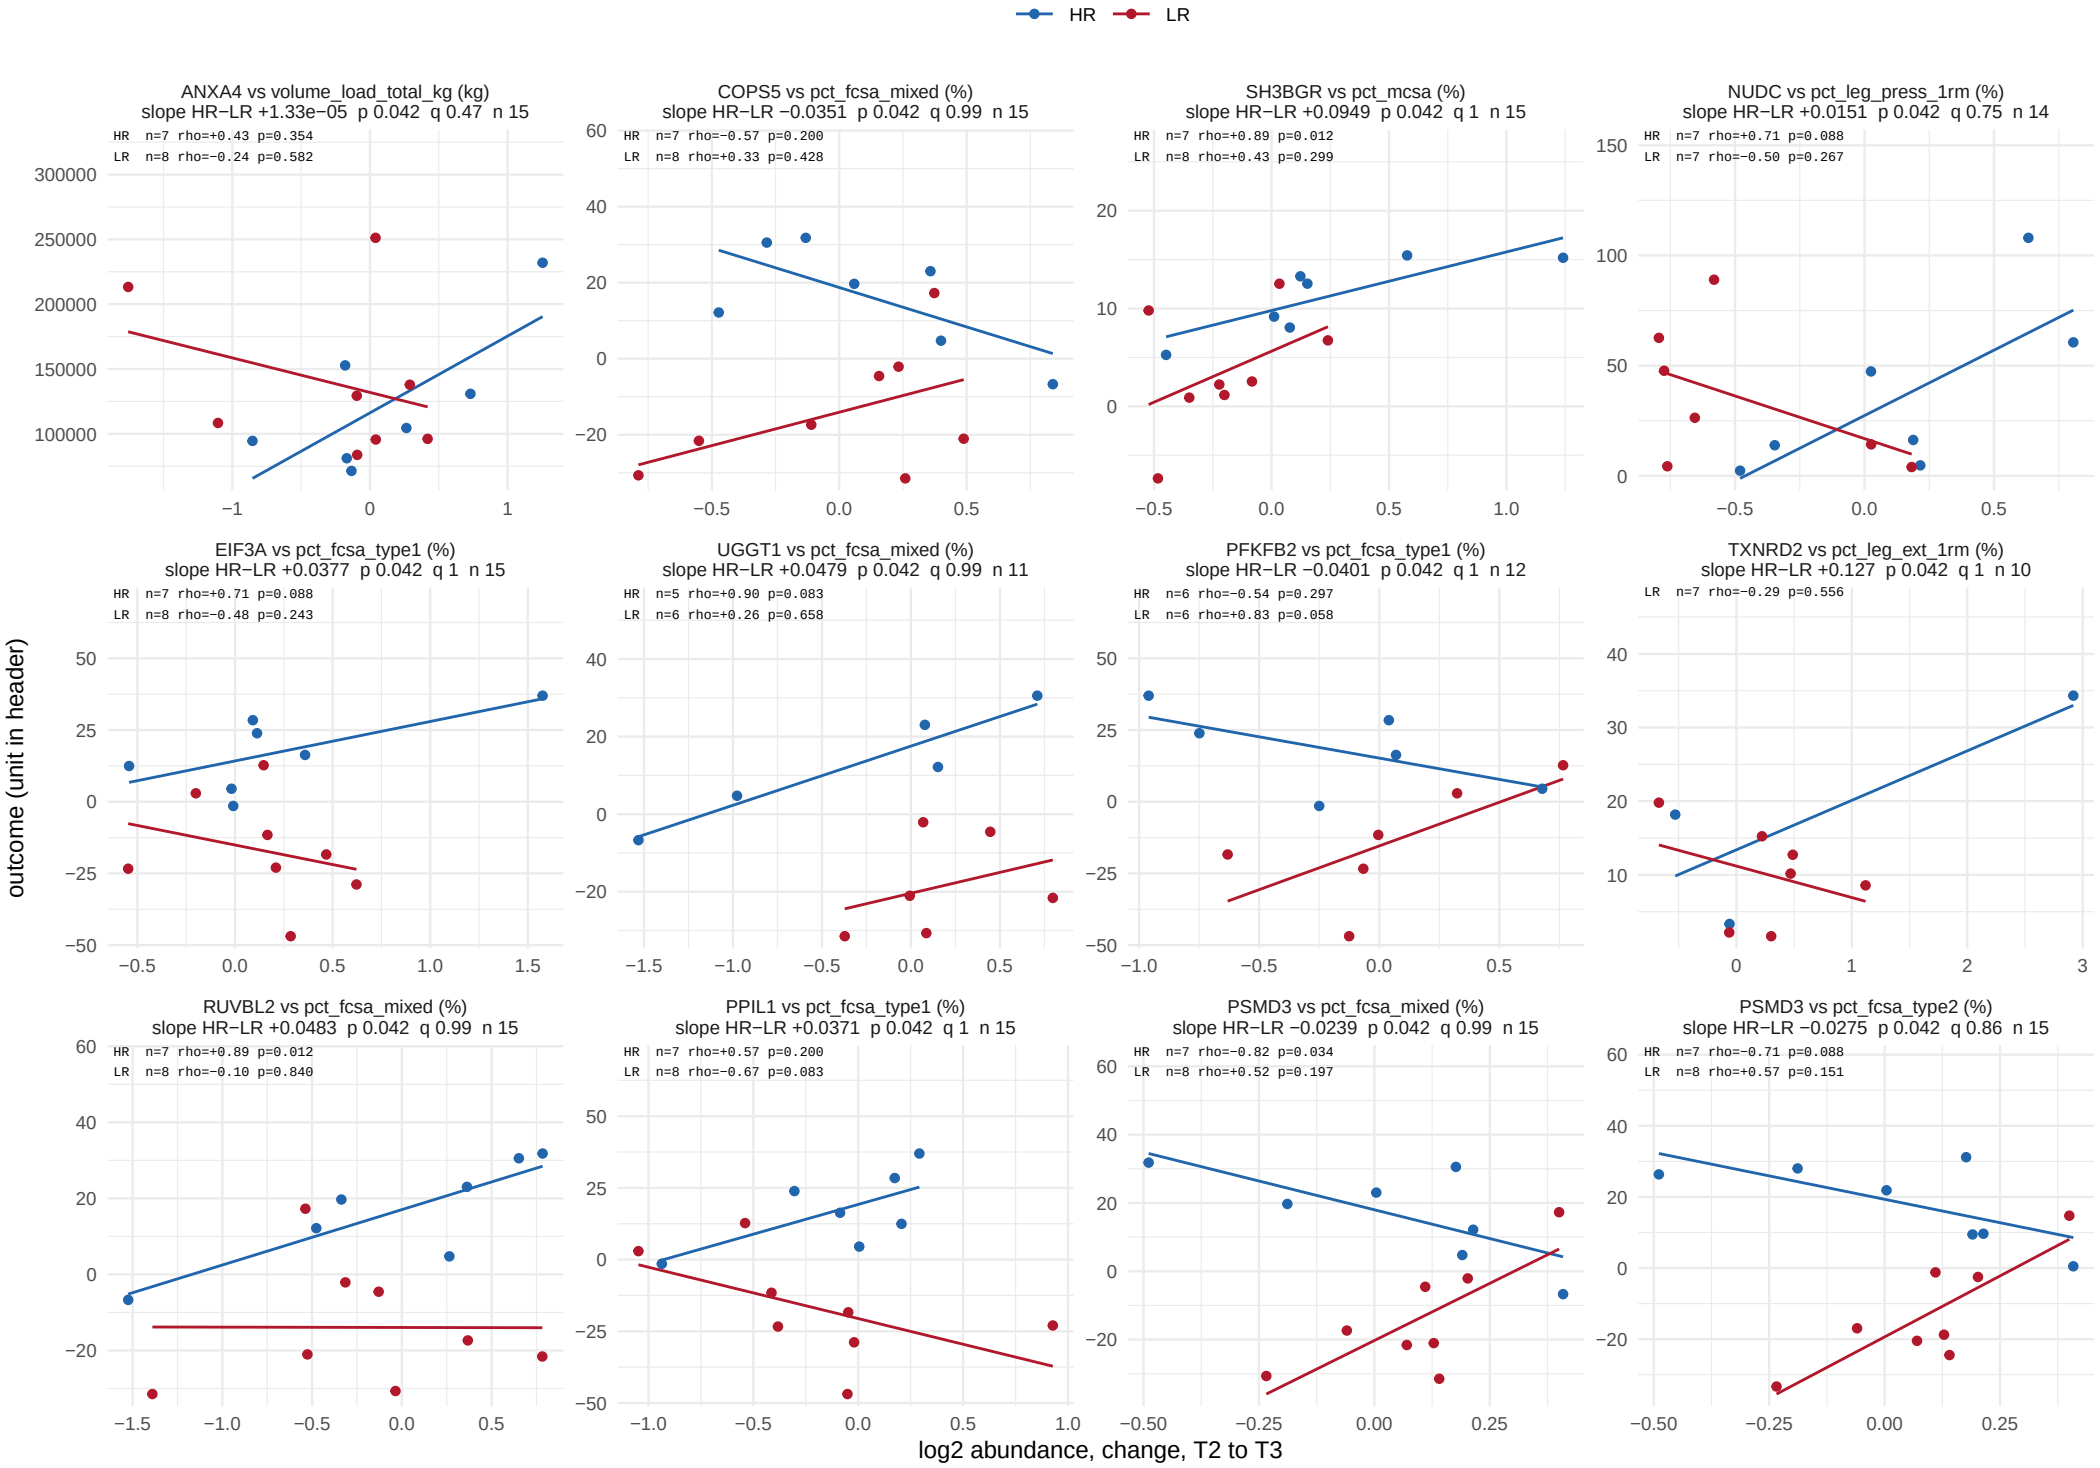

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


670 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 49 of 56.

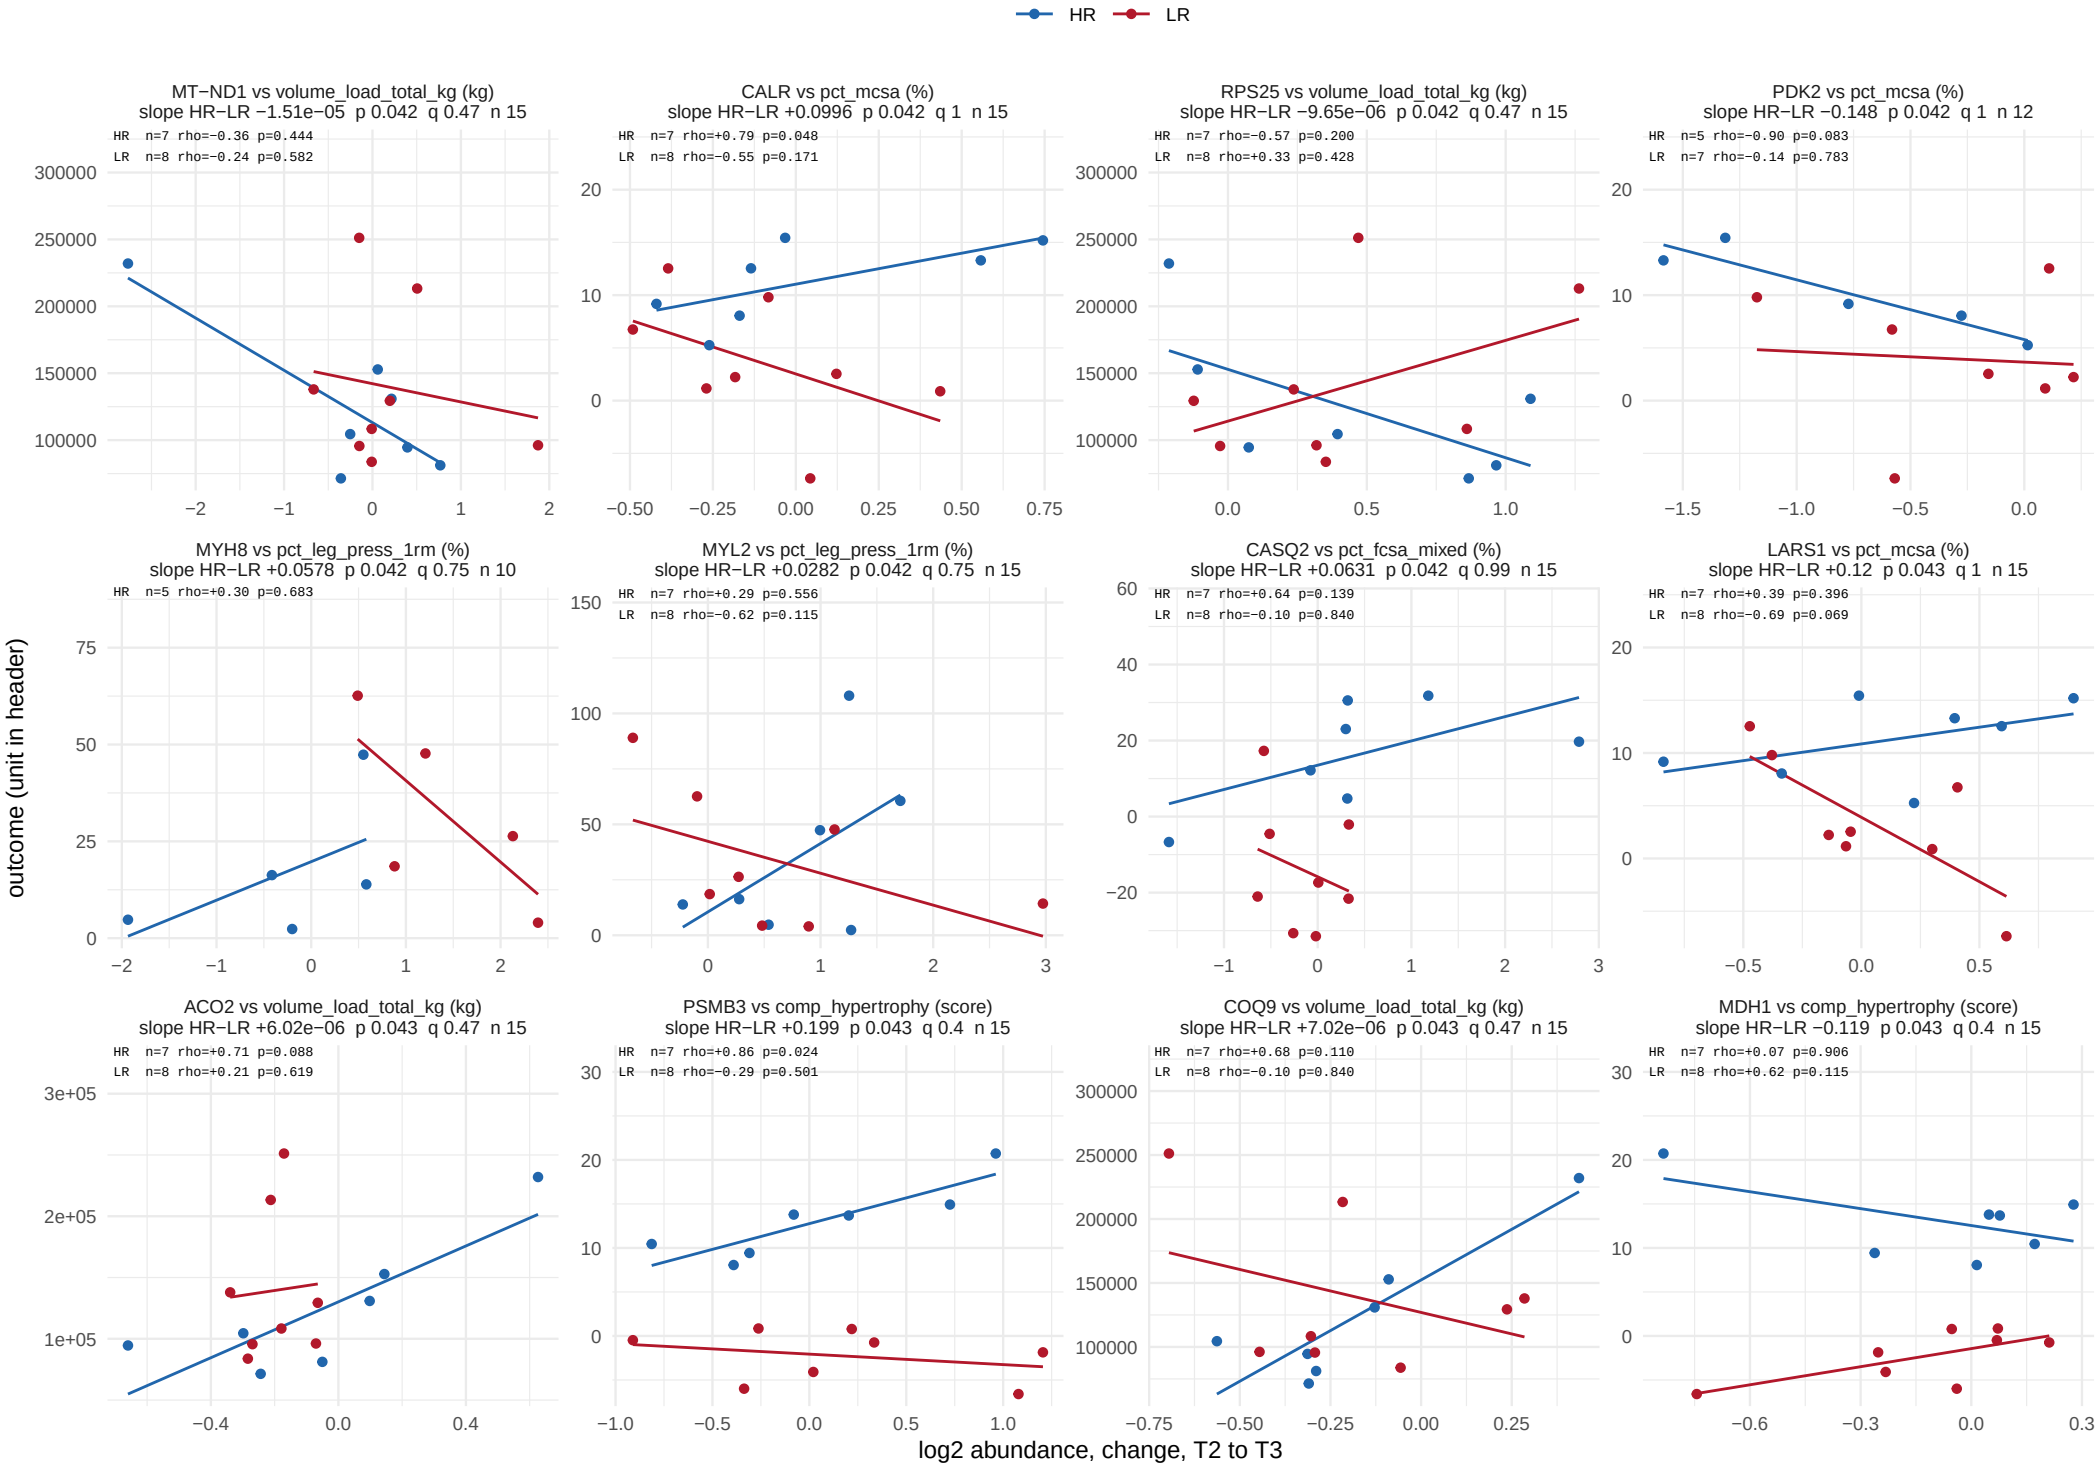

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


670 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 50 of 56.

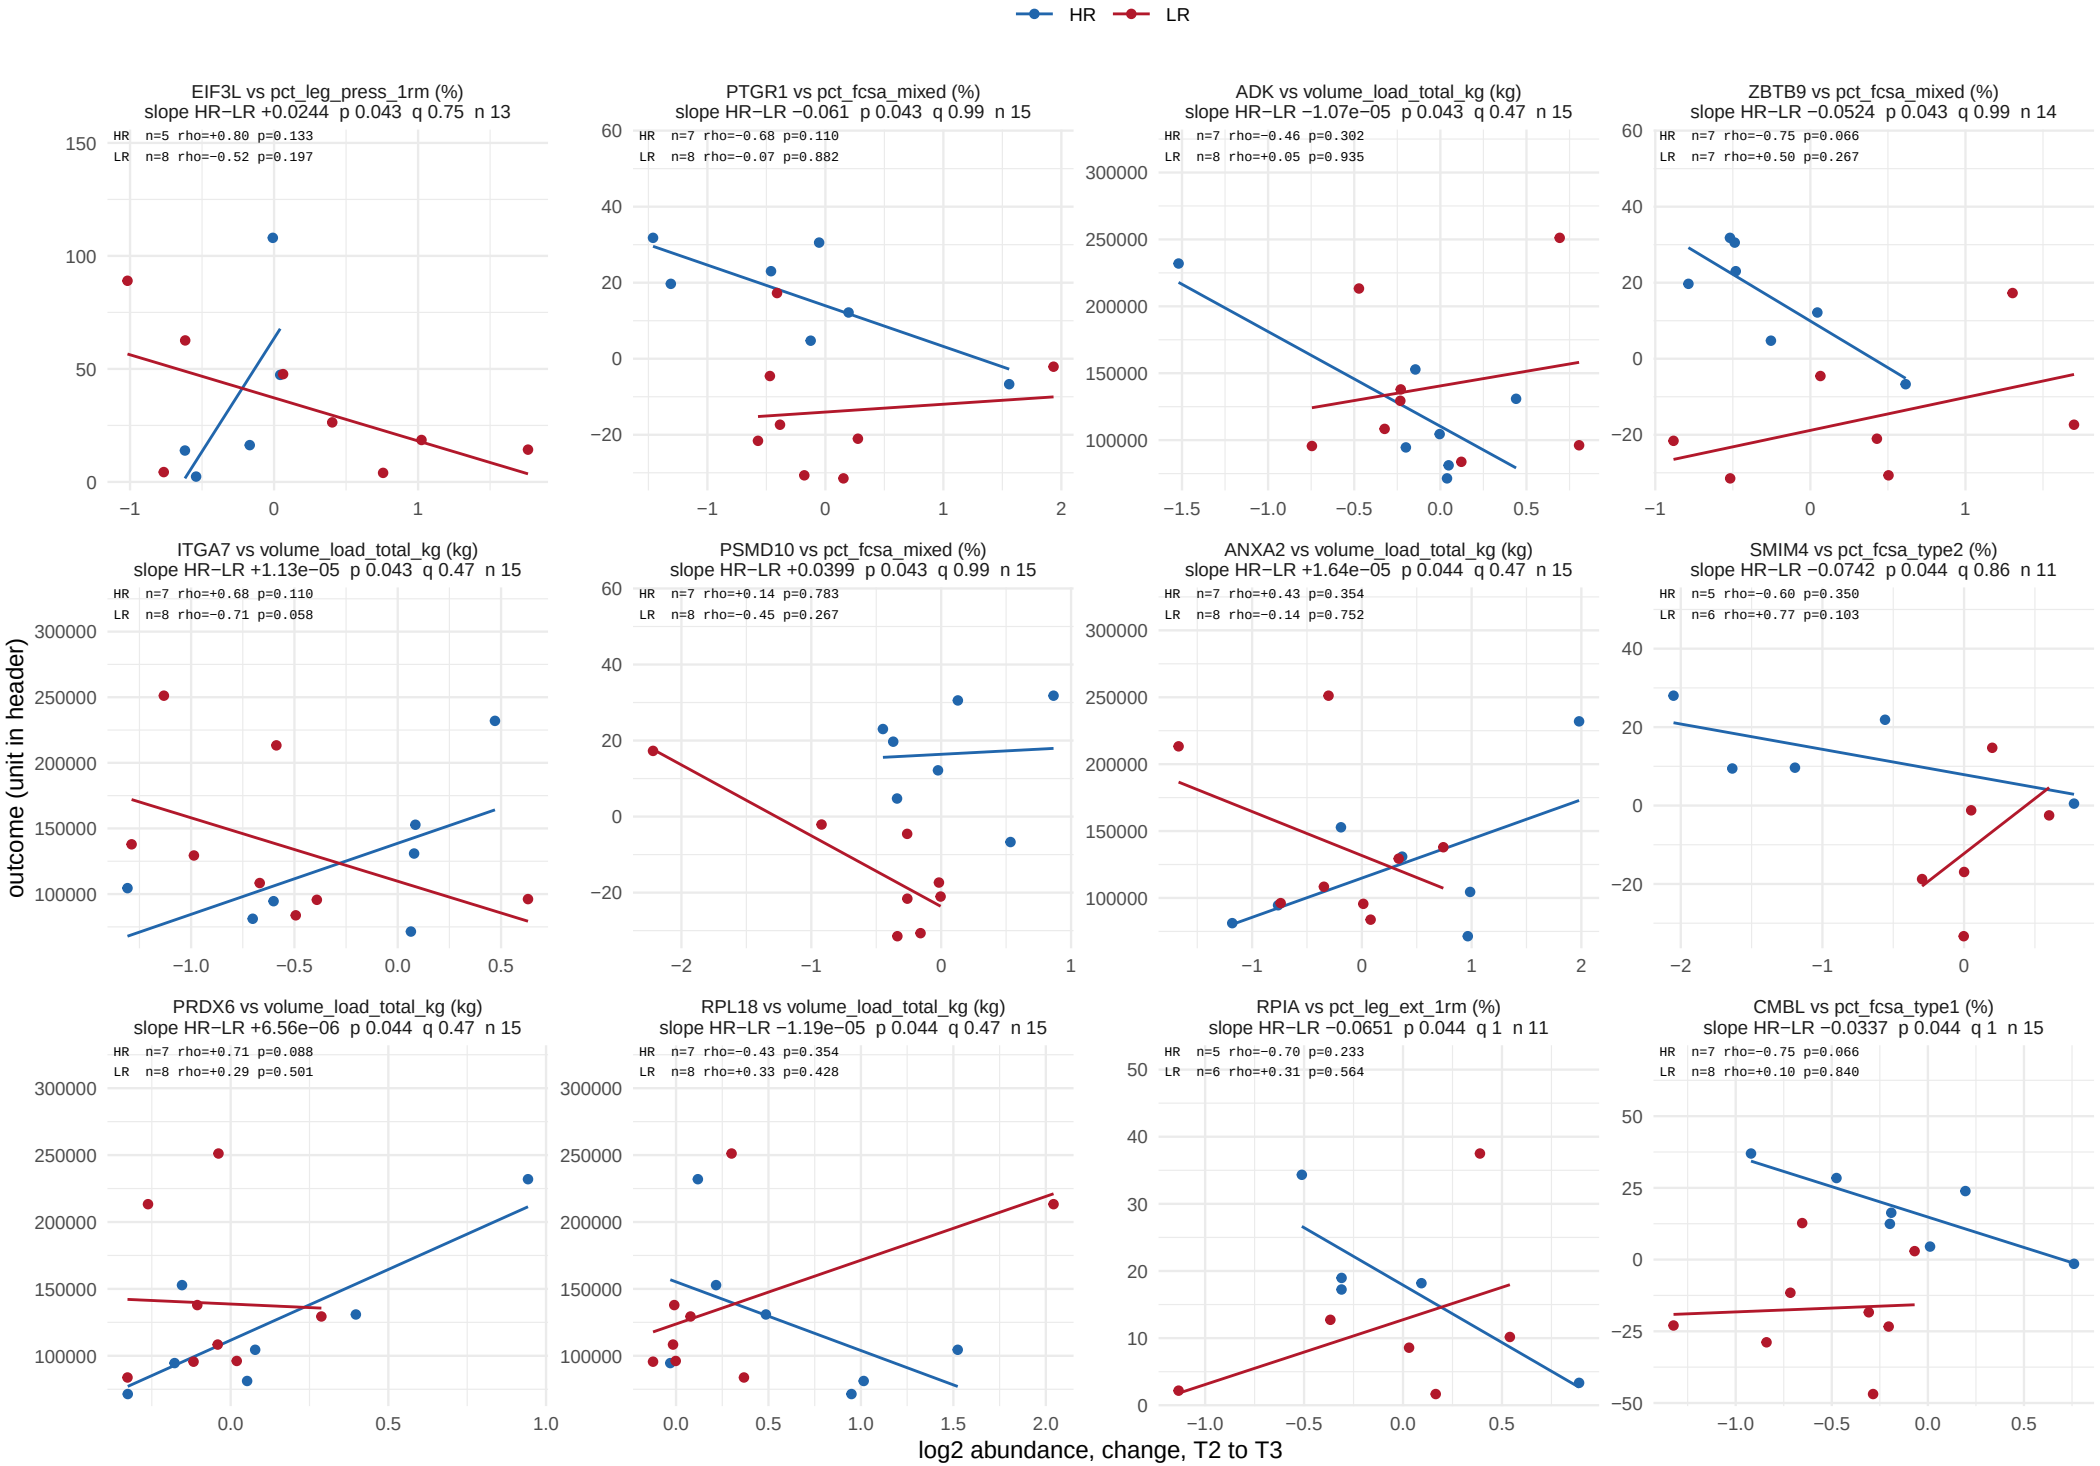

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


670 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 51 of 56.

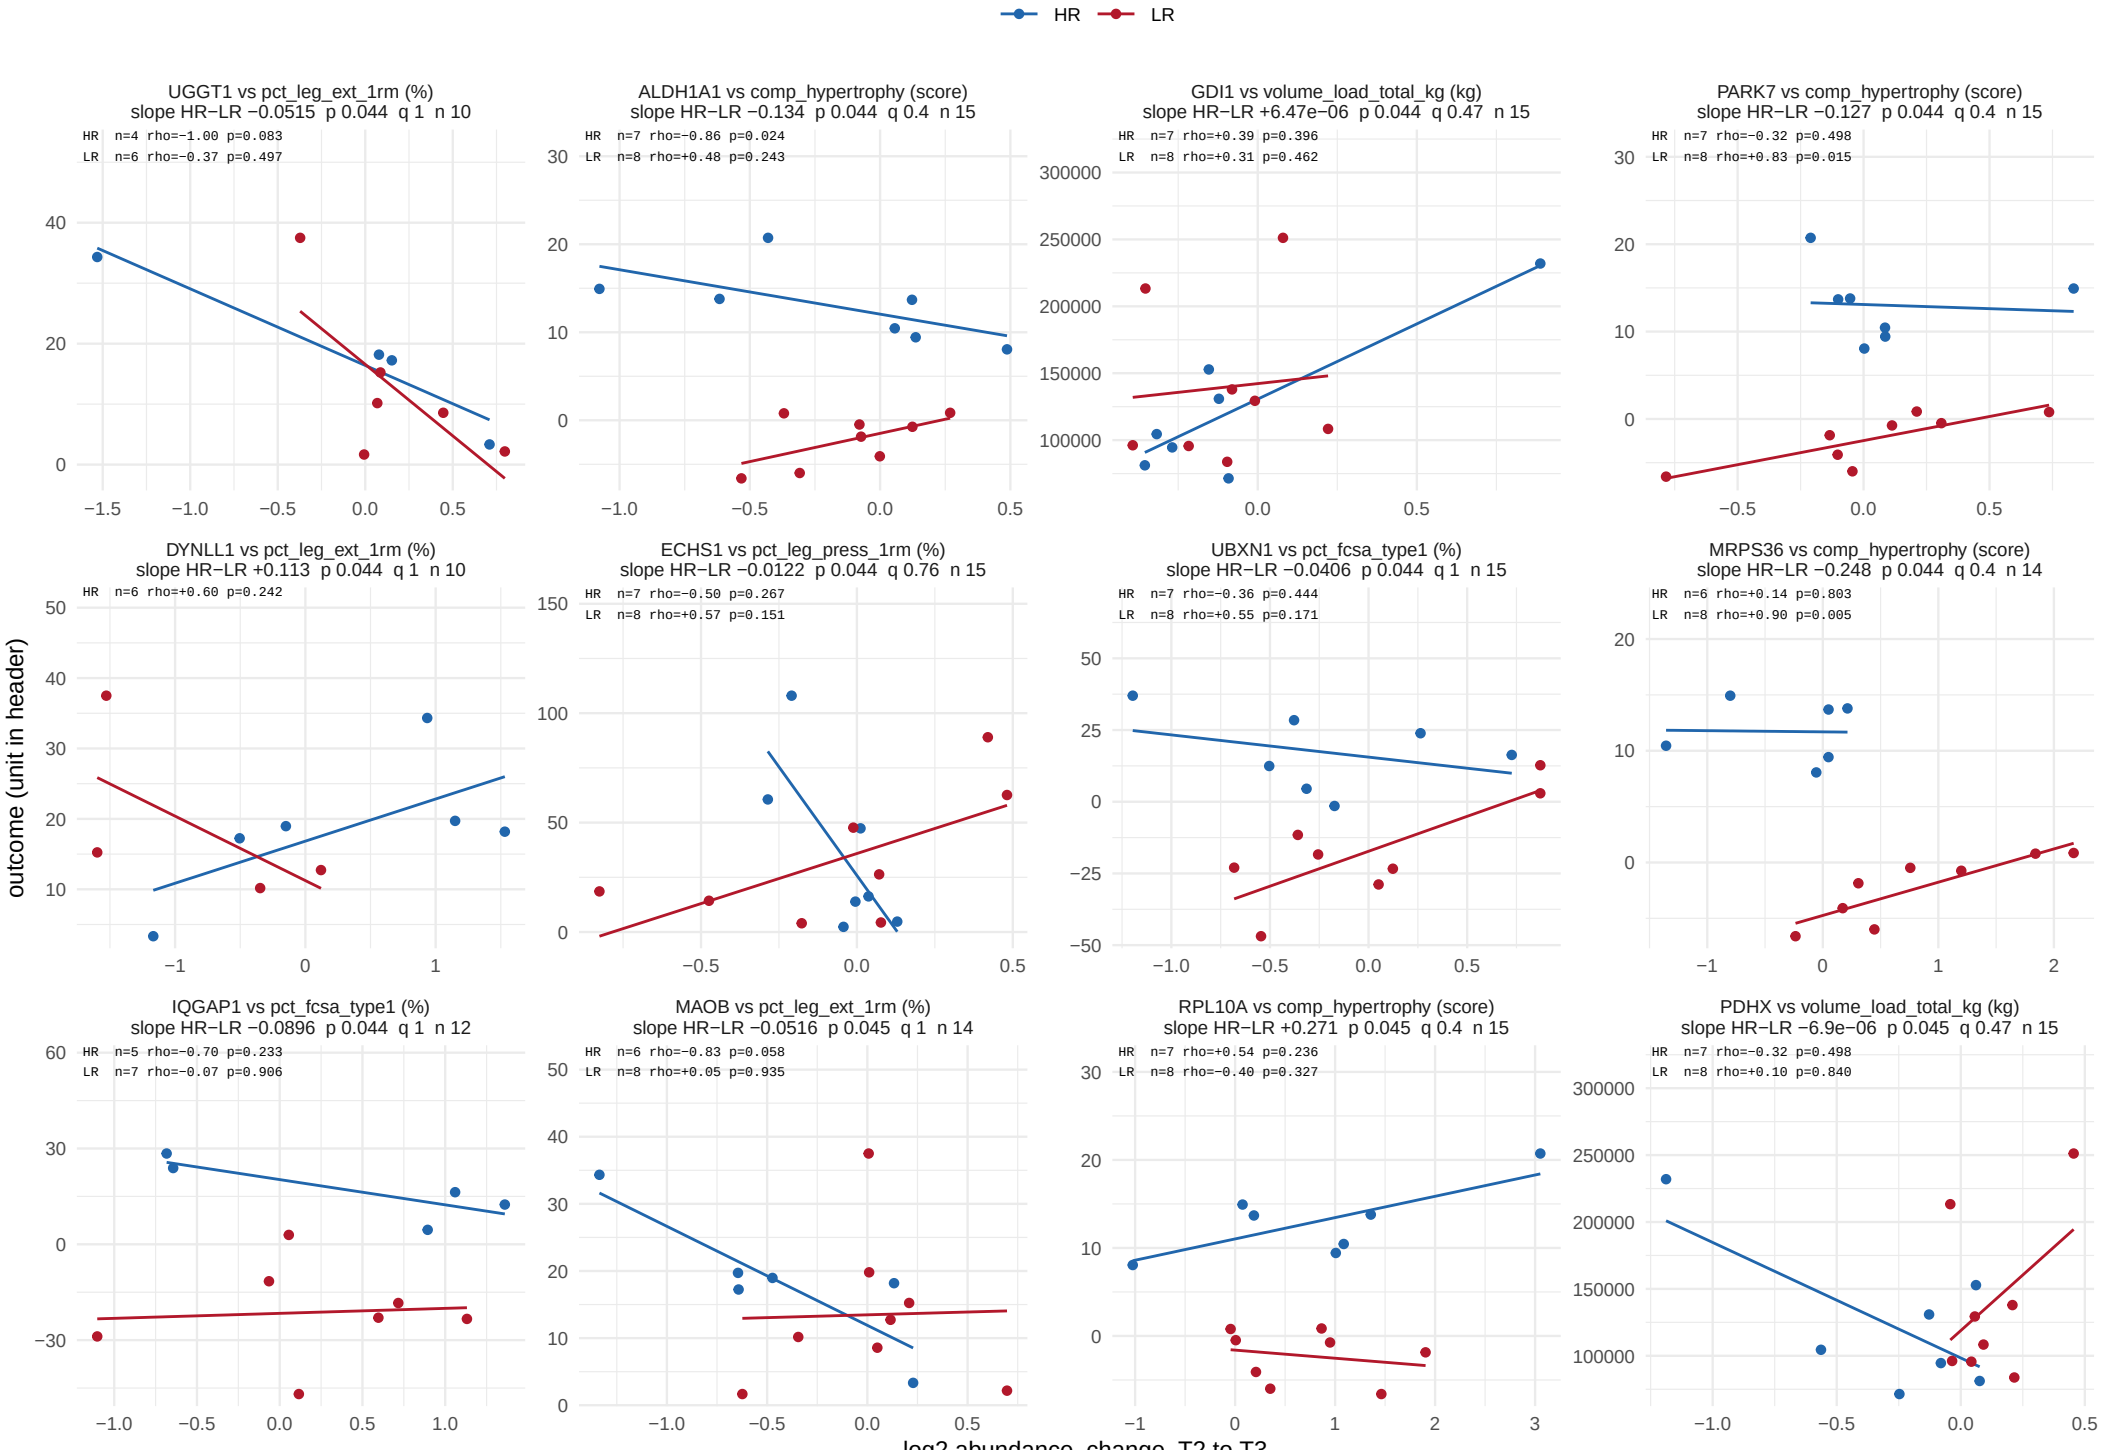

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


670 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 52 of 56.

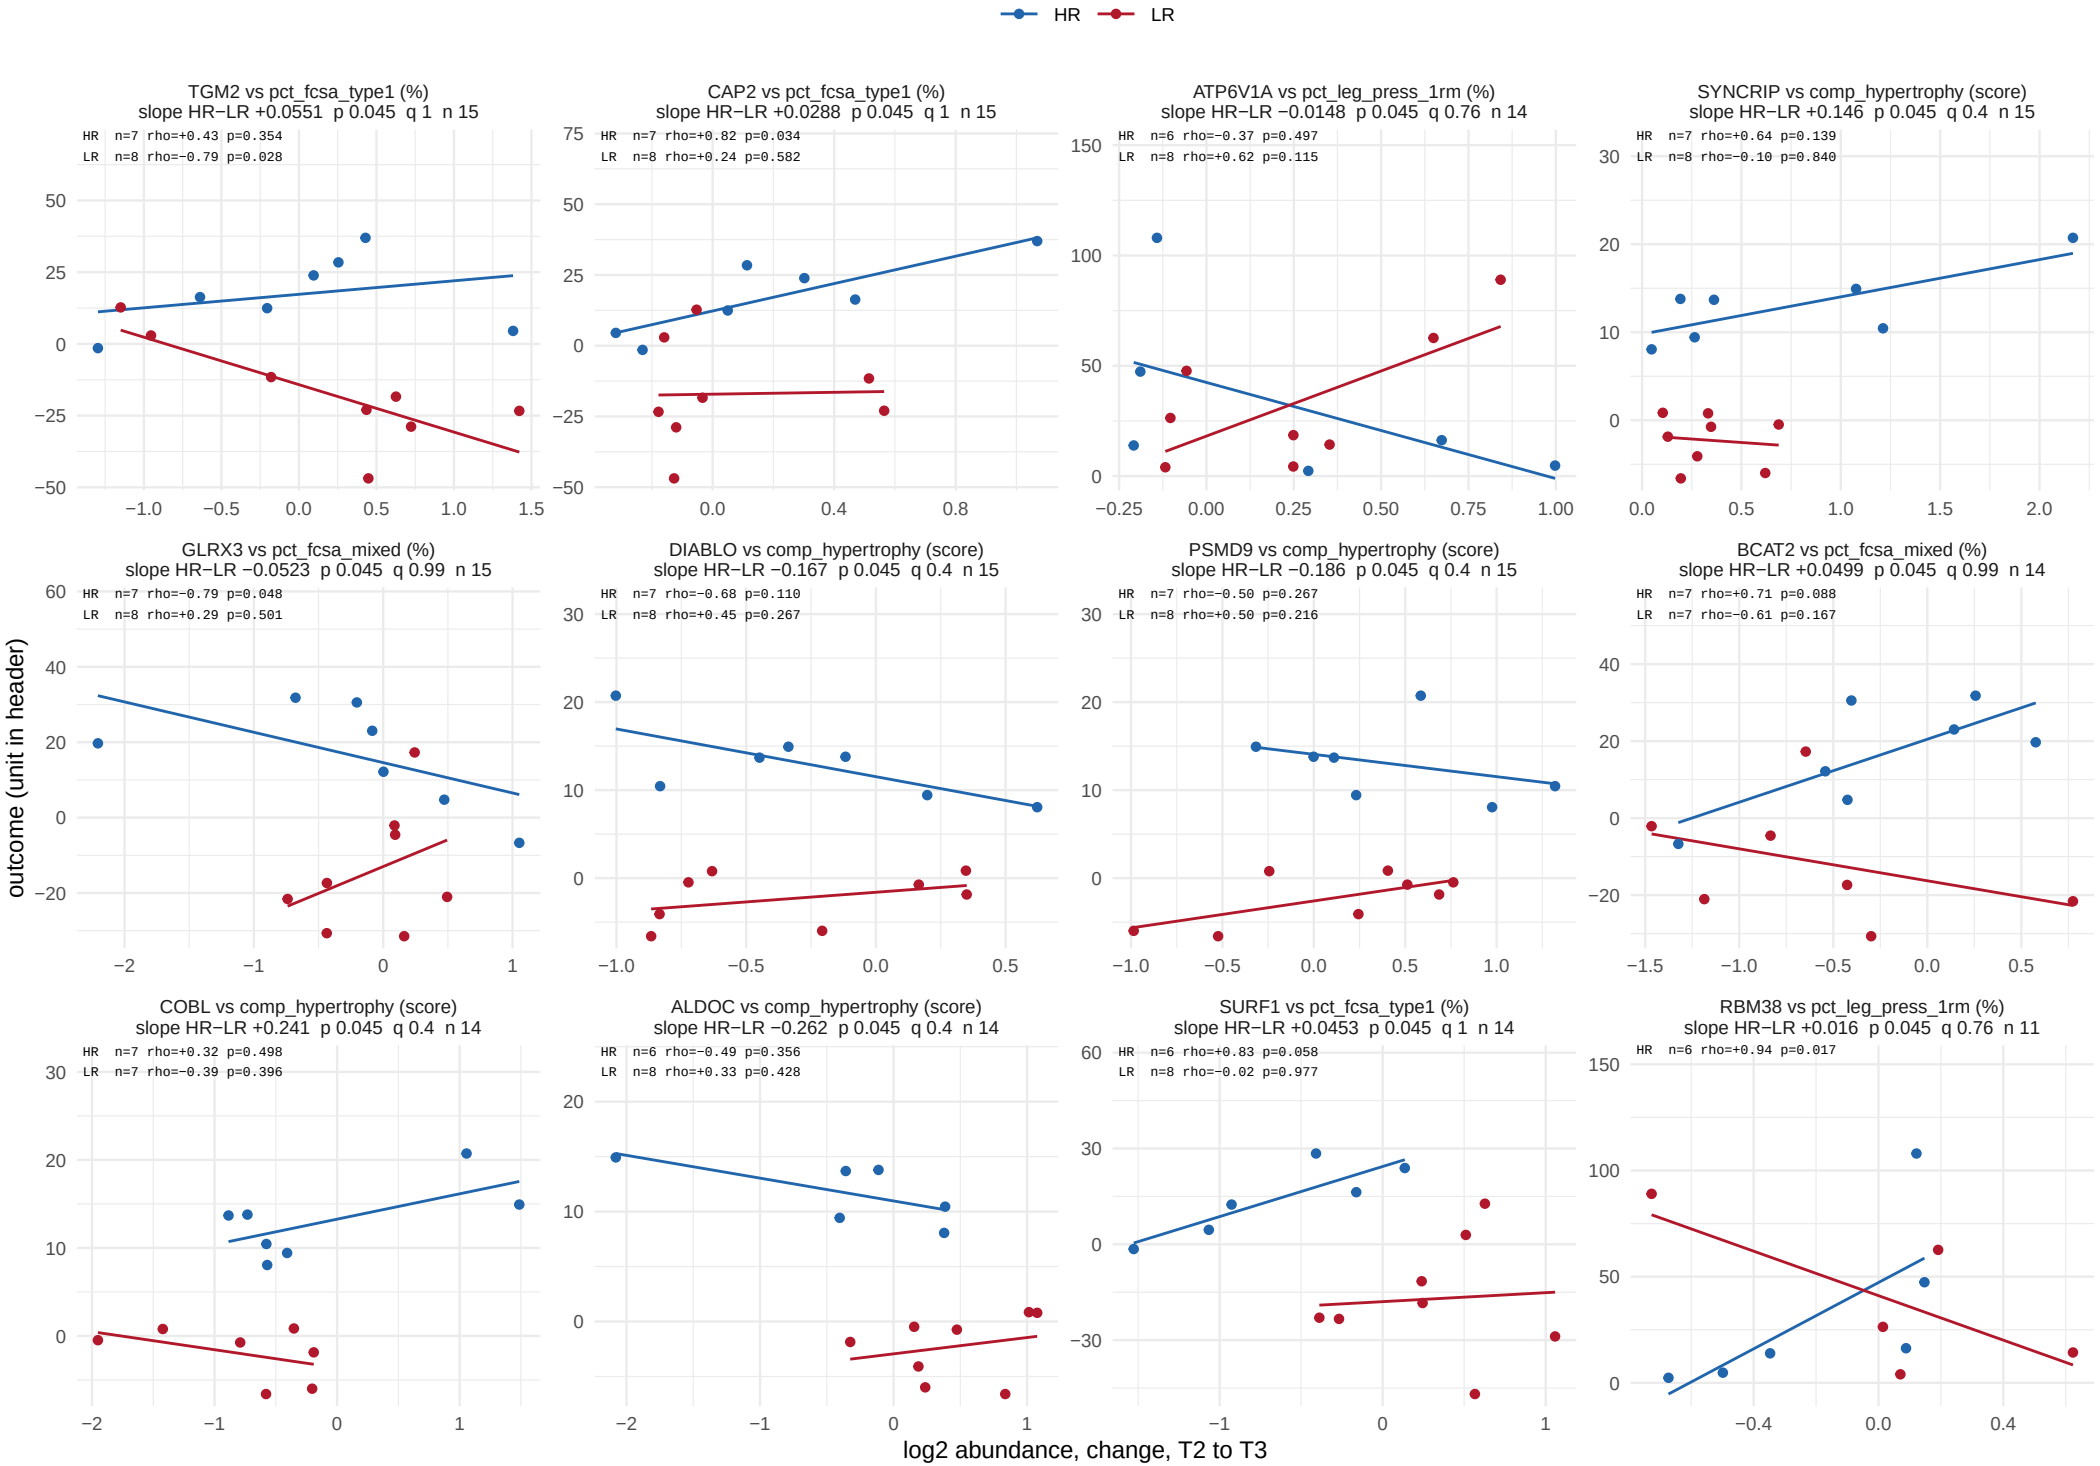

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


670 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 53 of 56.

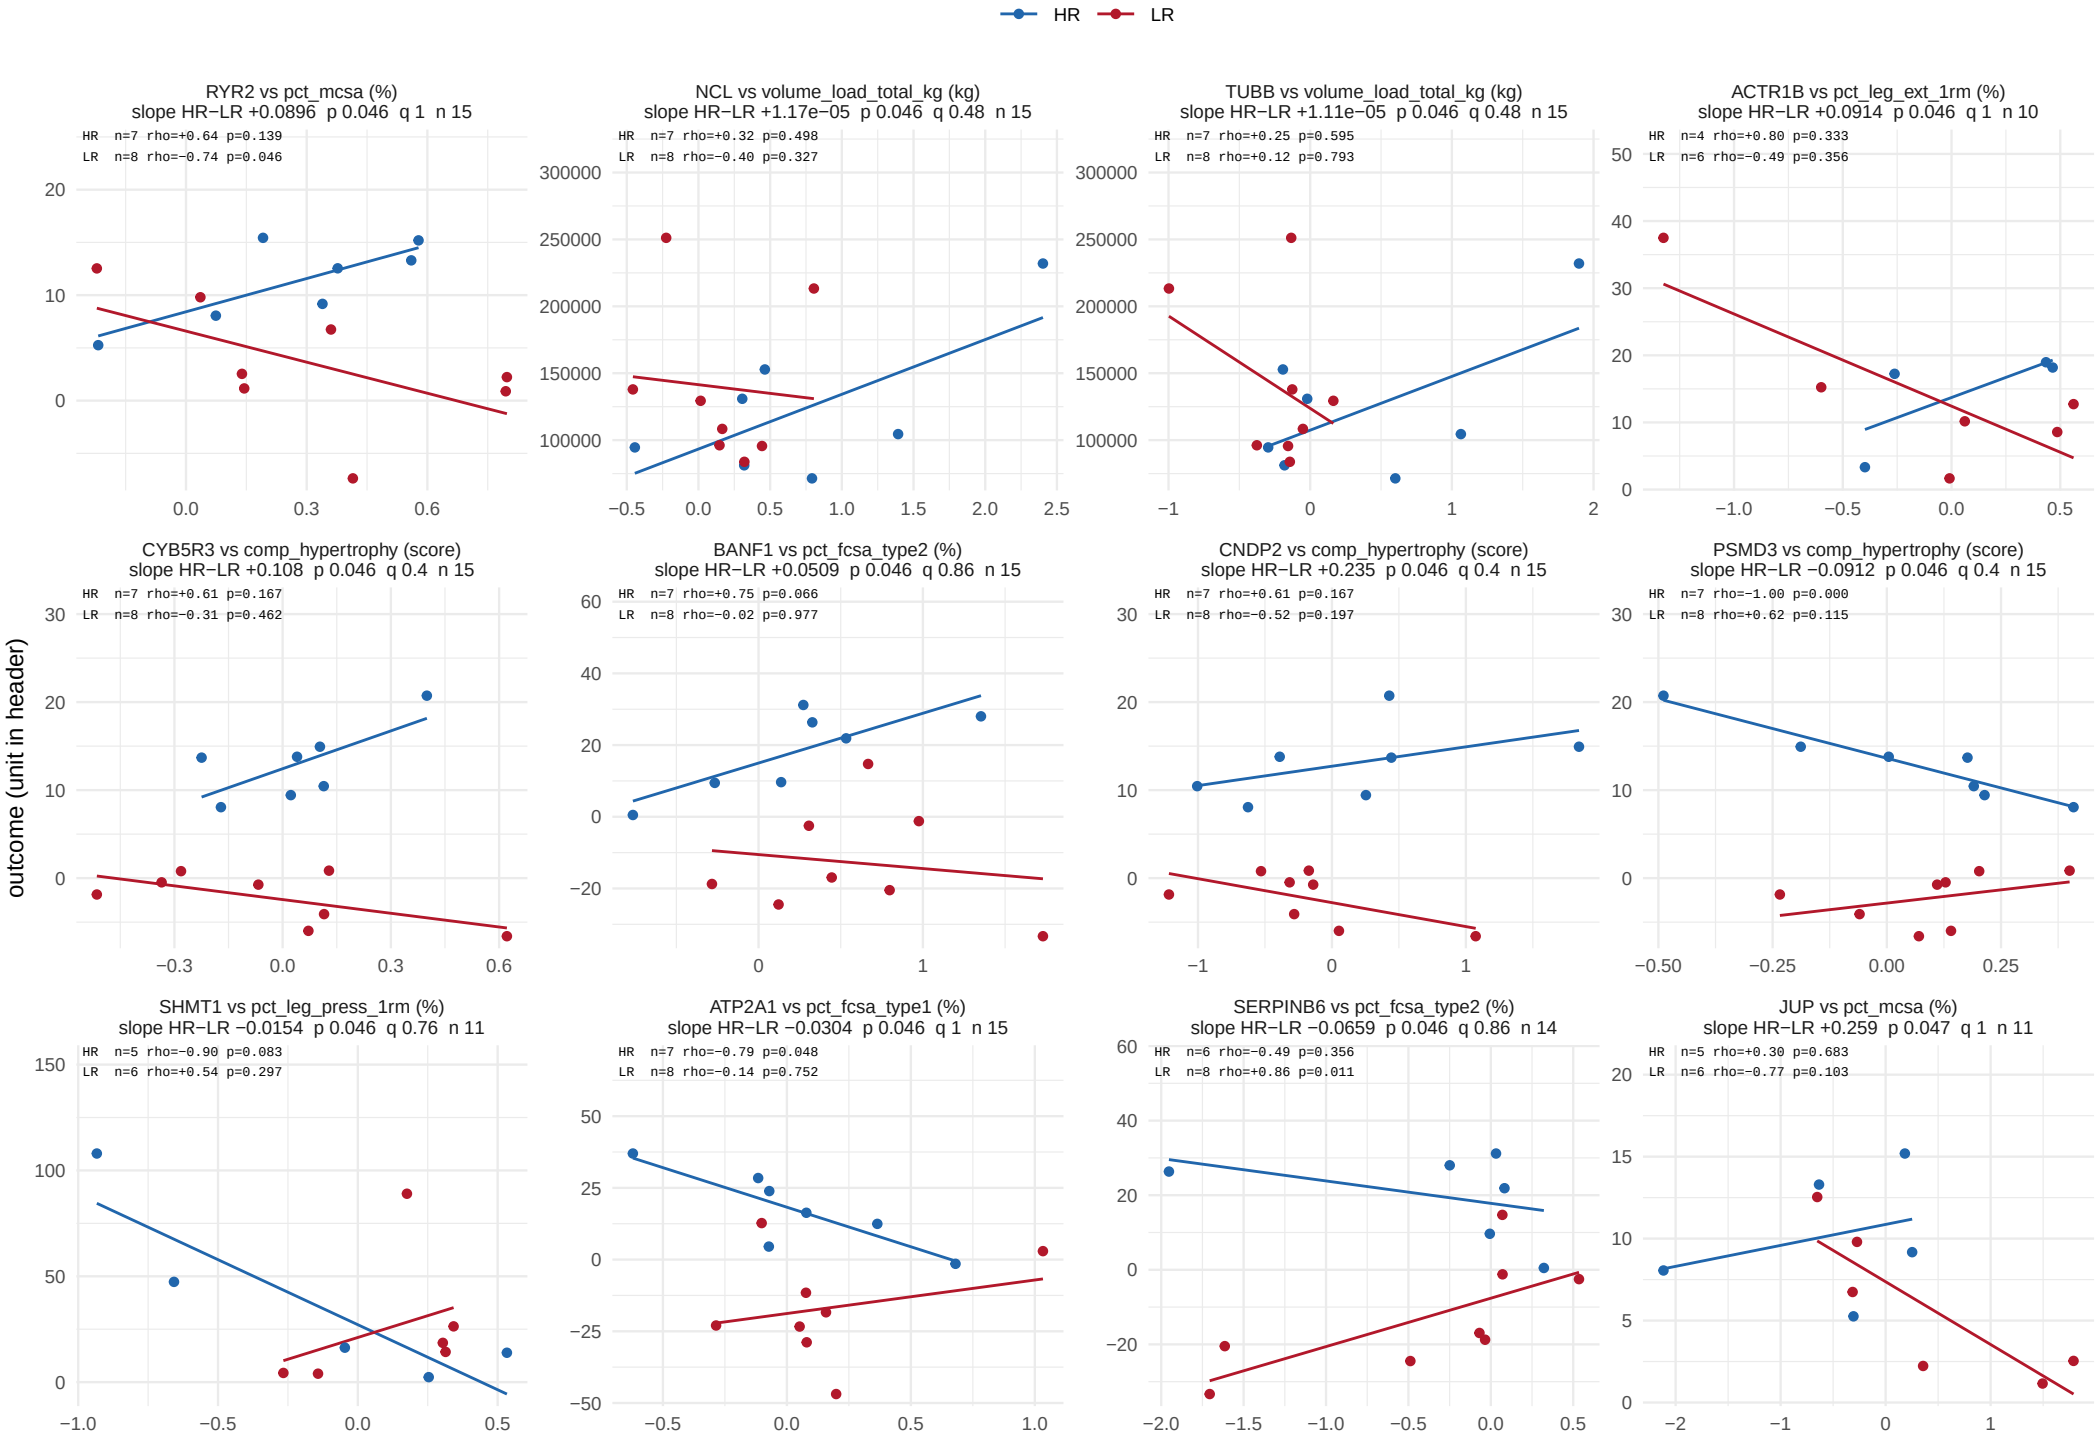

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


670 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 54 of 56.

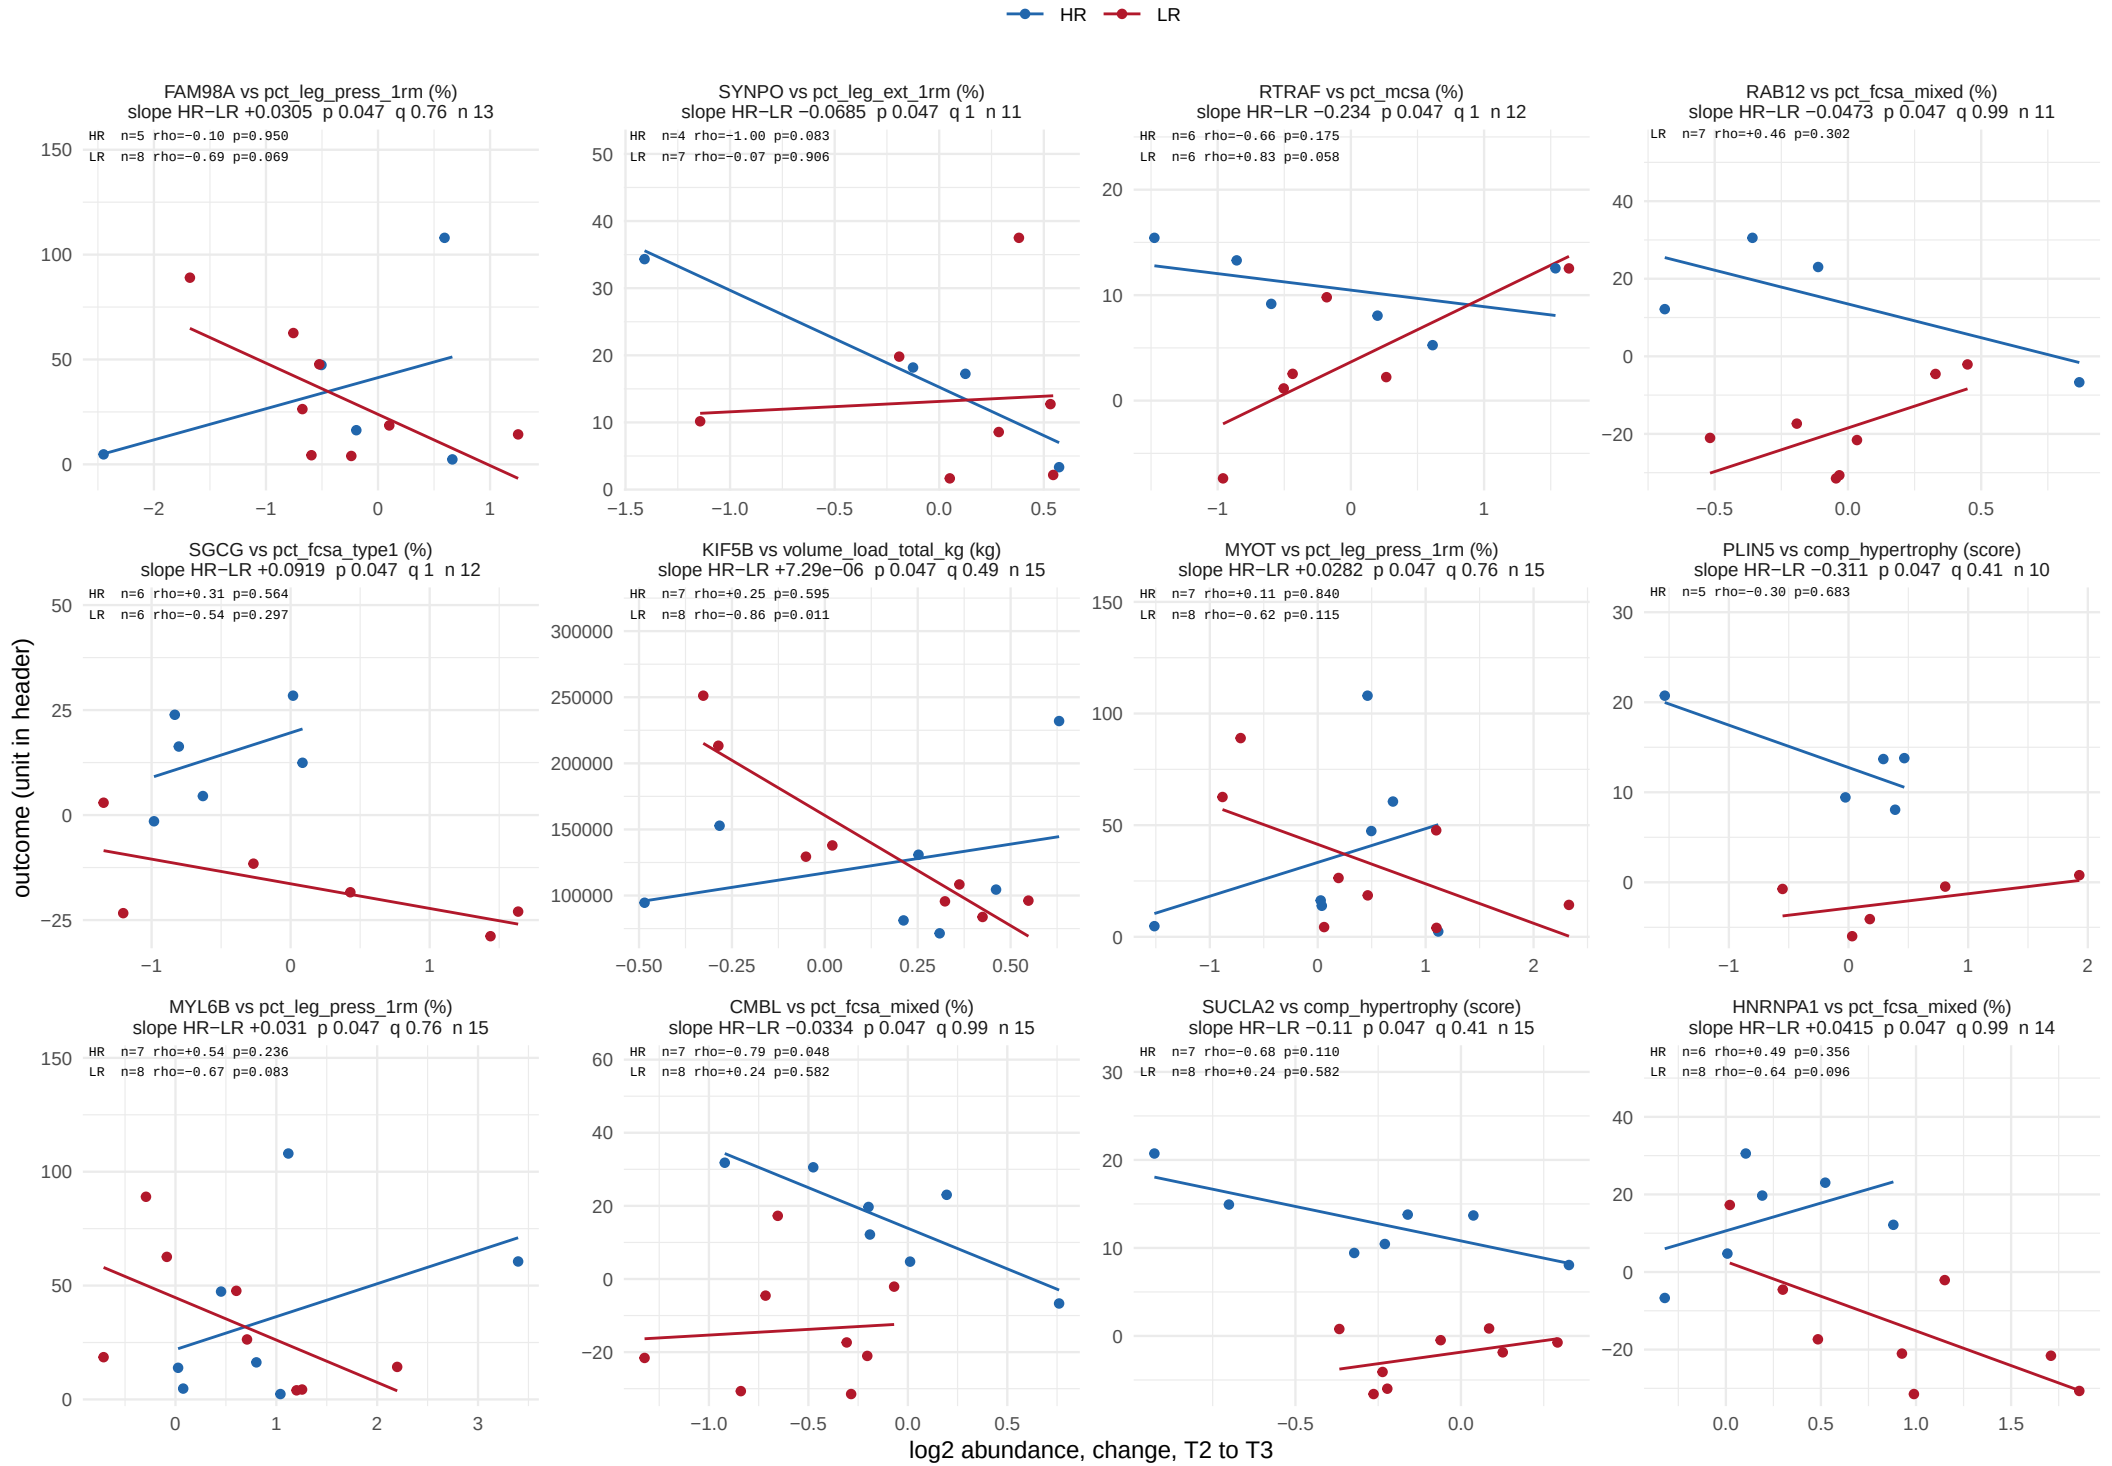

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


670 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 55 of 56.

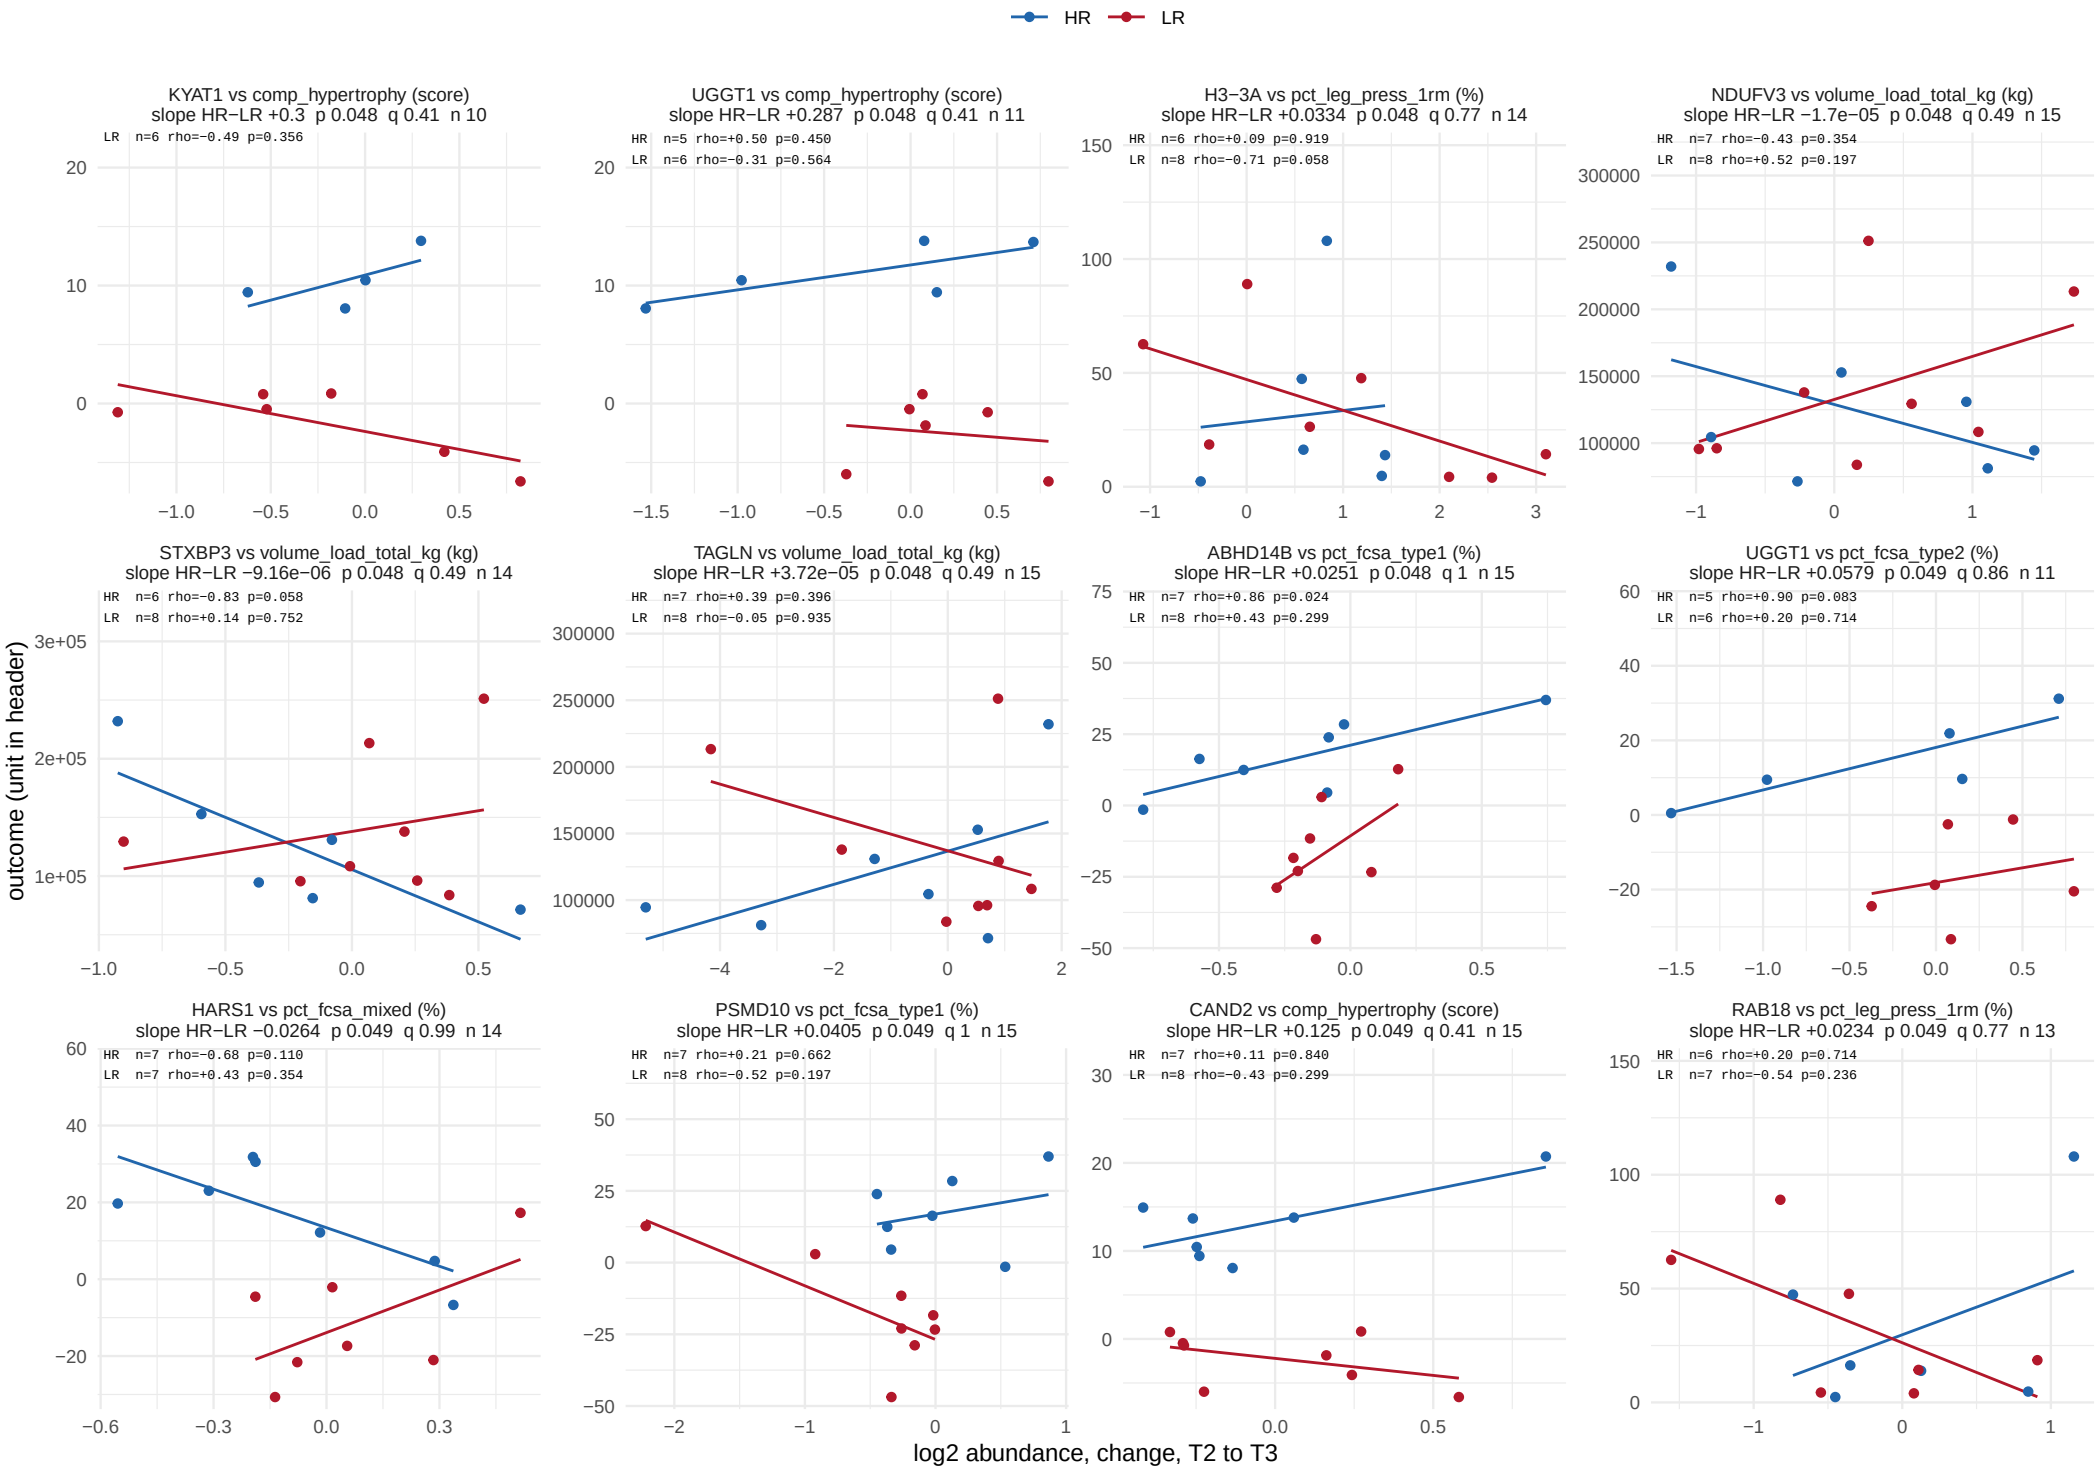

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


670 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 56 of 56.

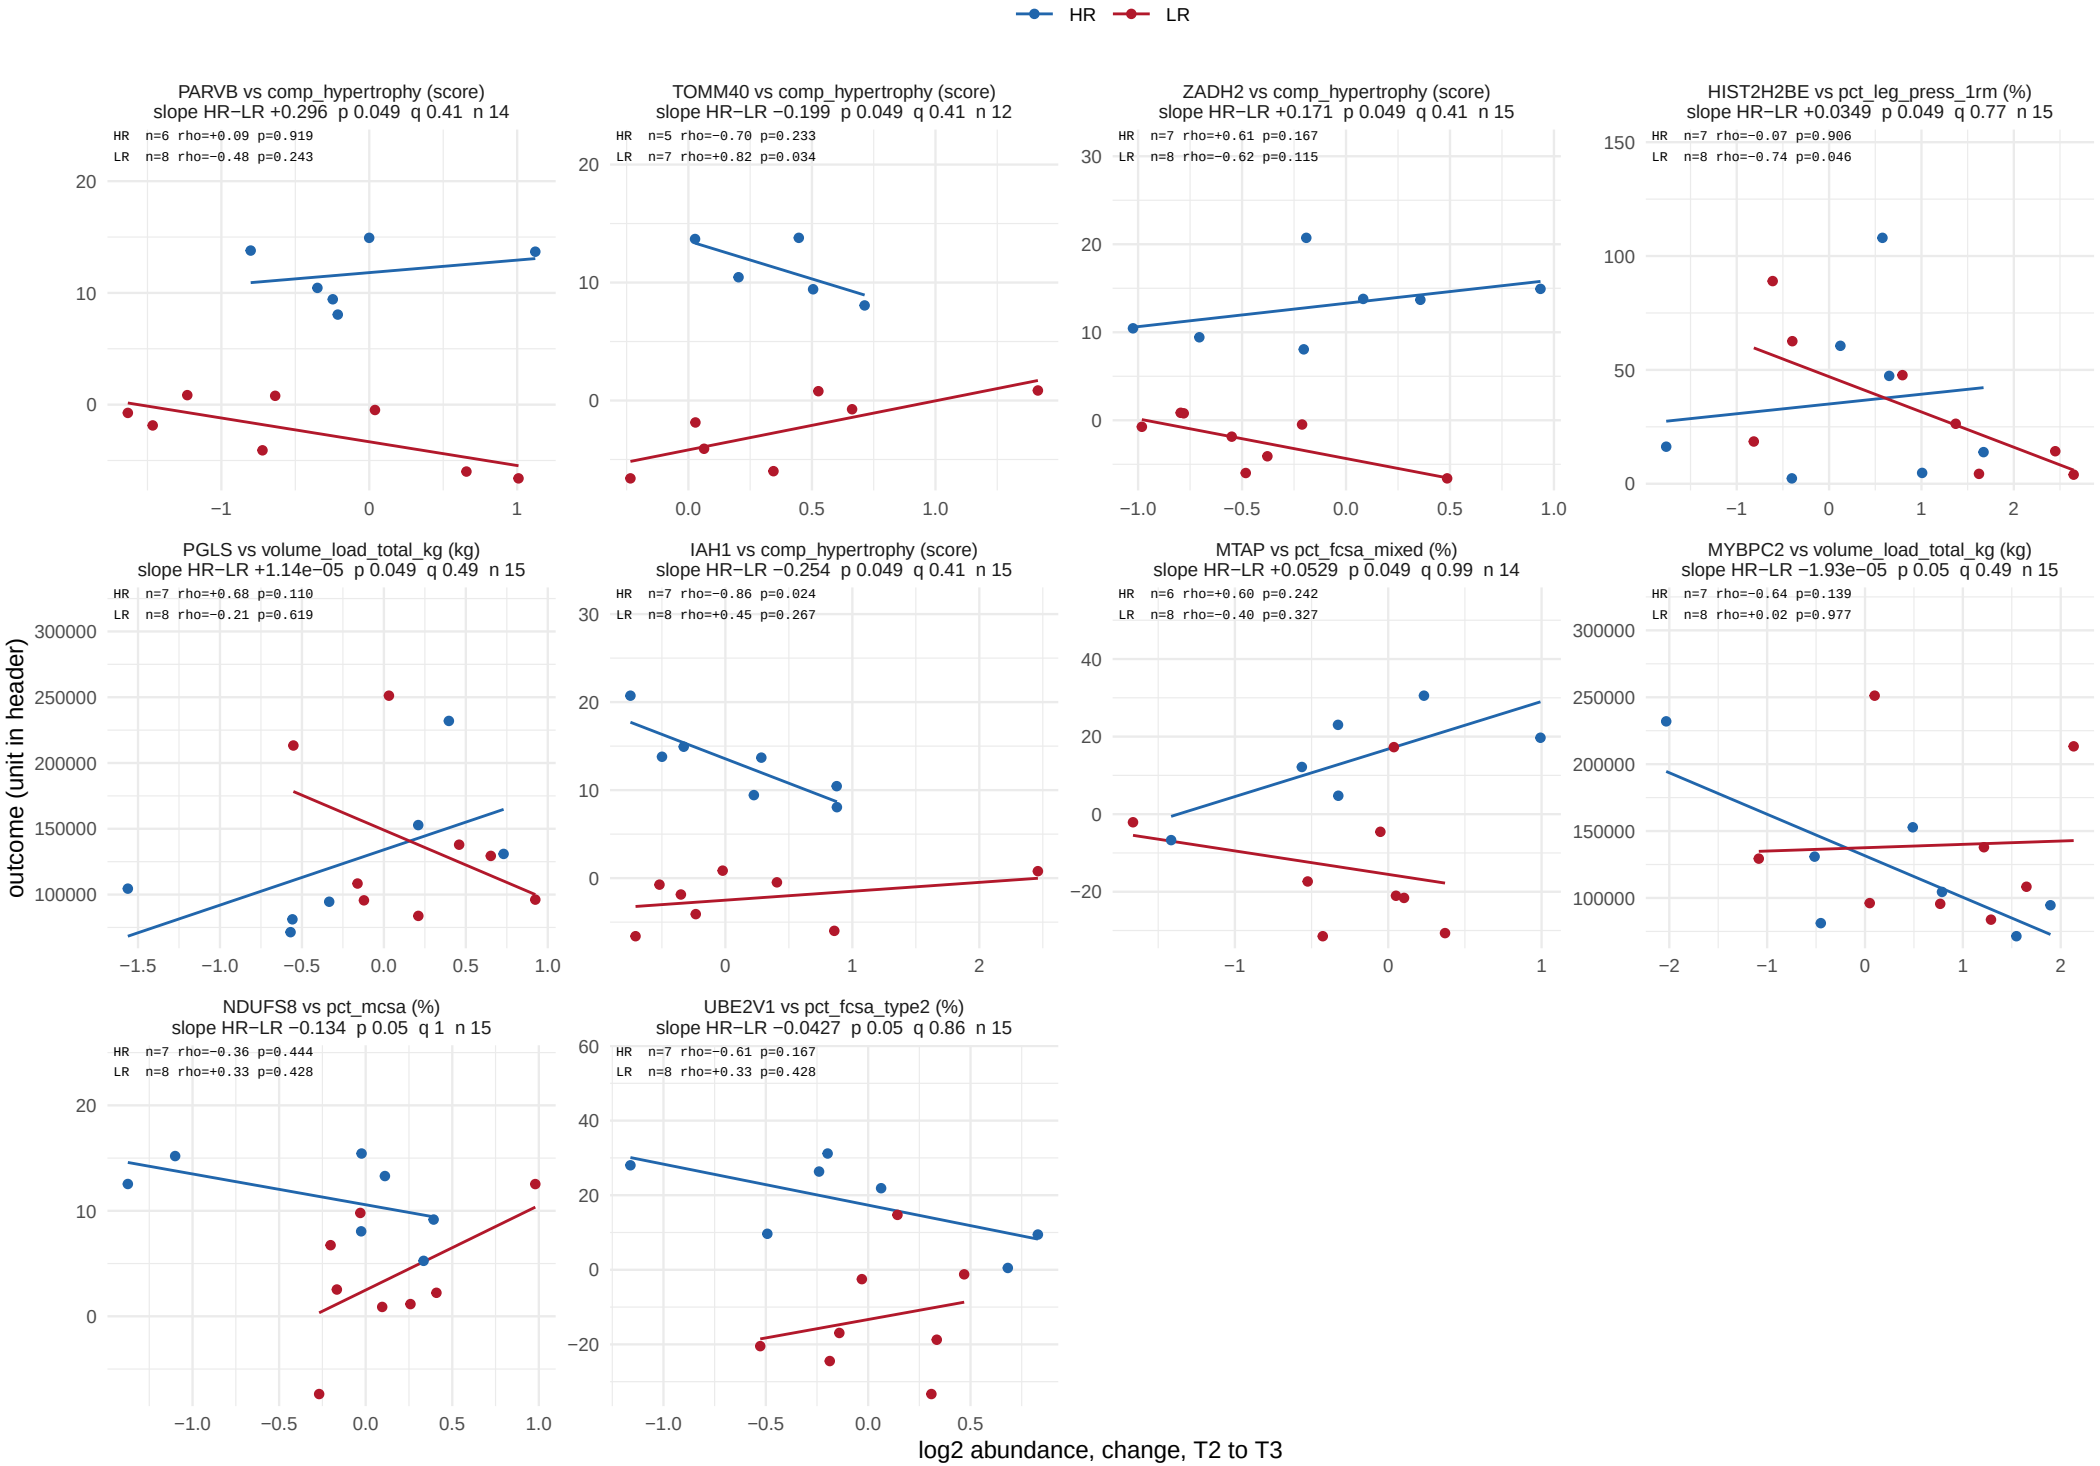

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Two predictor, training window


260 of 5676 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 1 of 22.

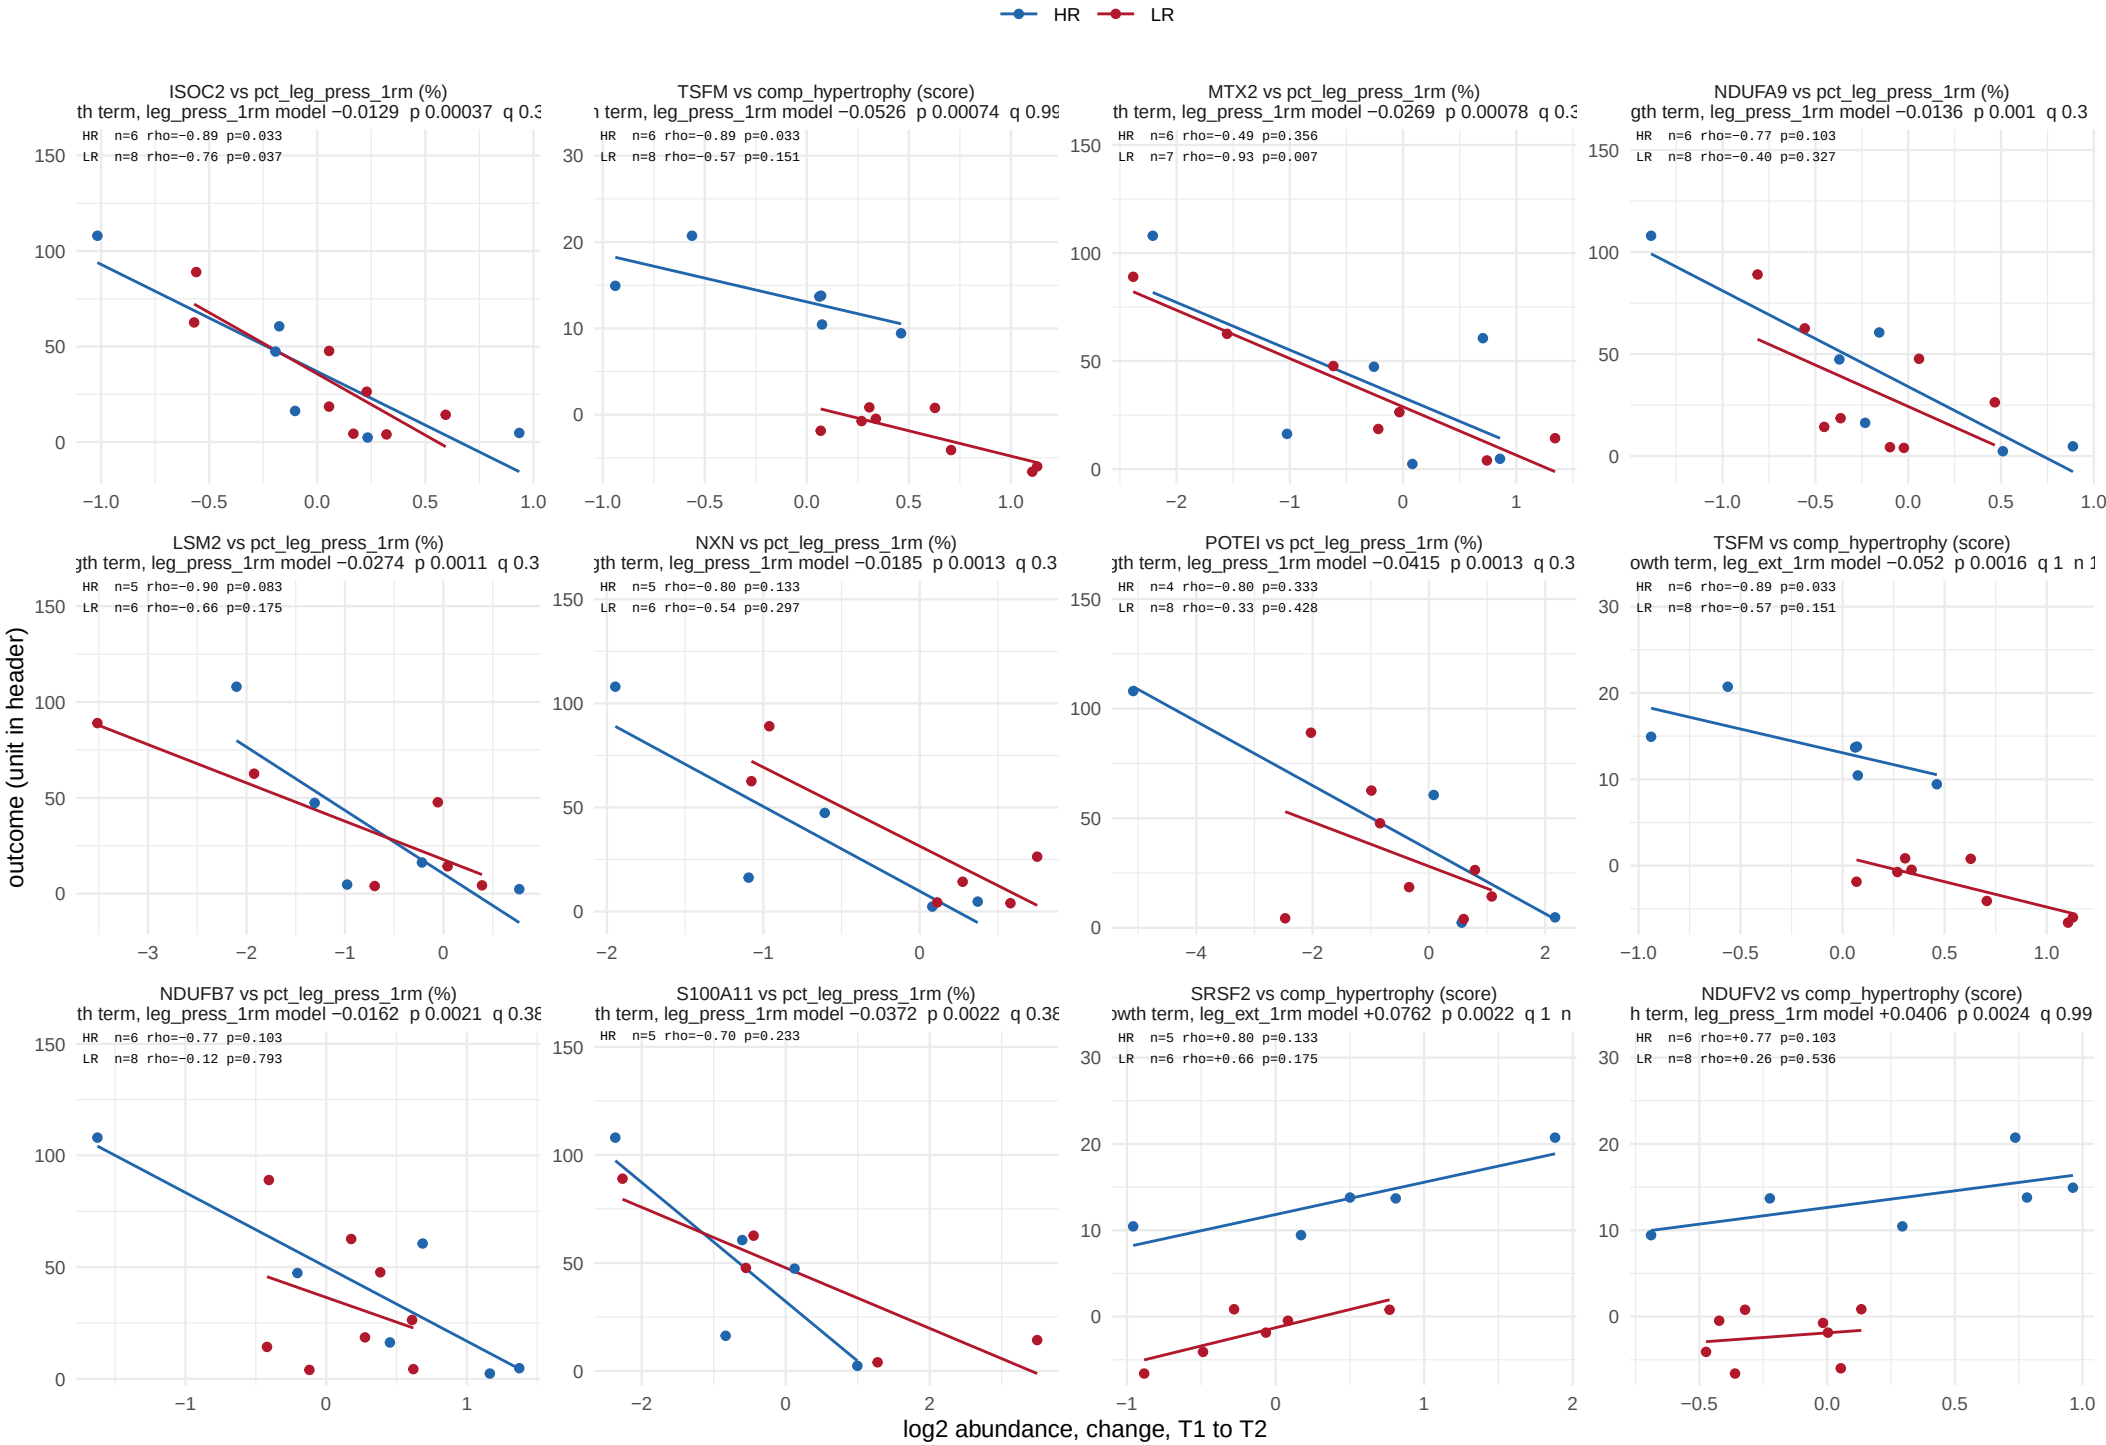

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, training window


260 of 5676 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 2 of 22.

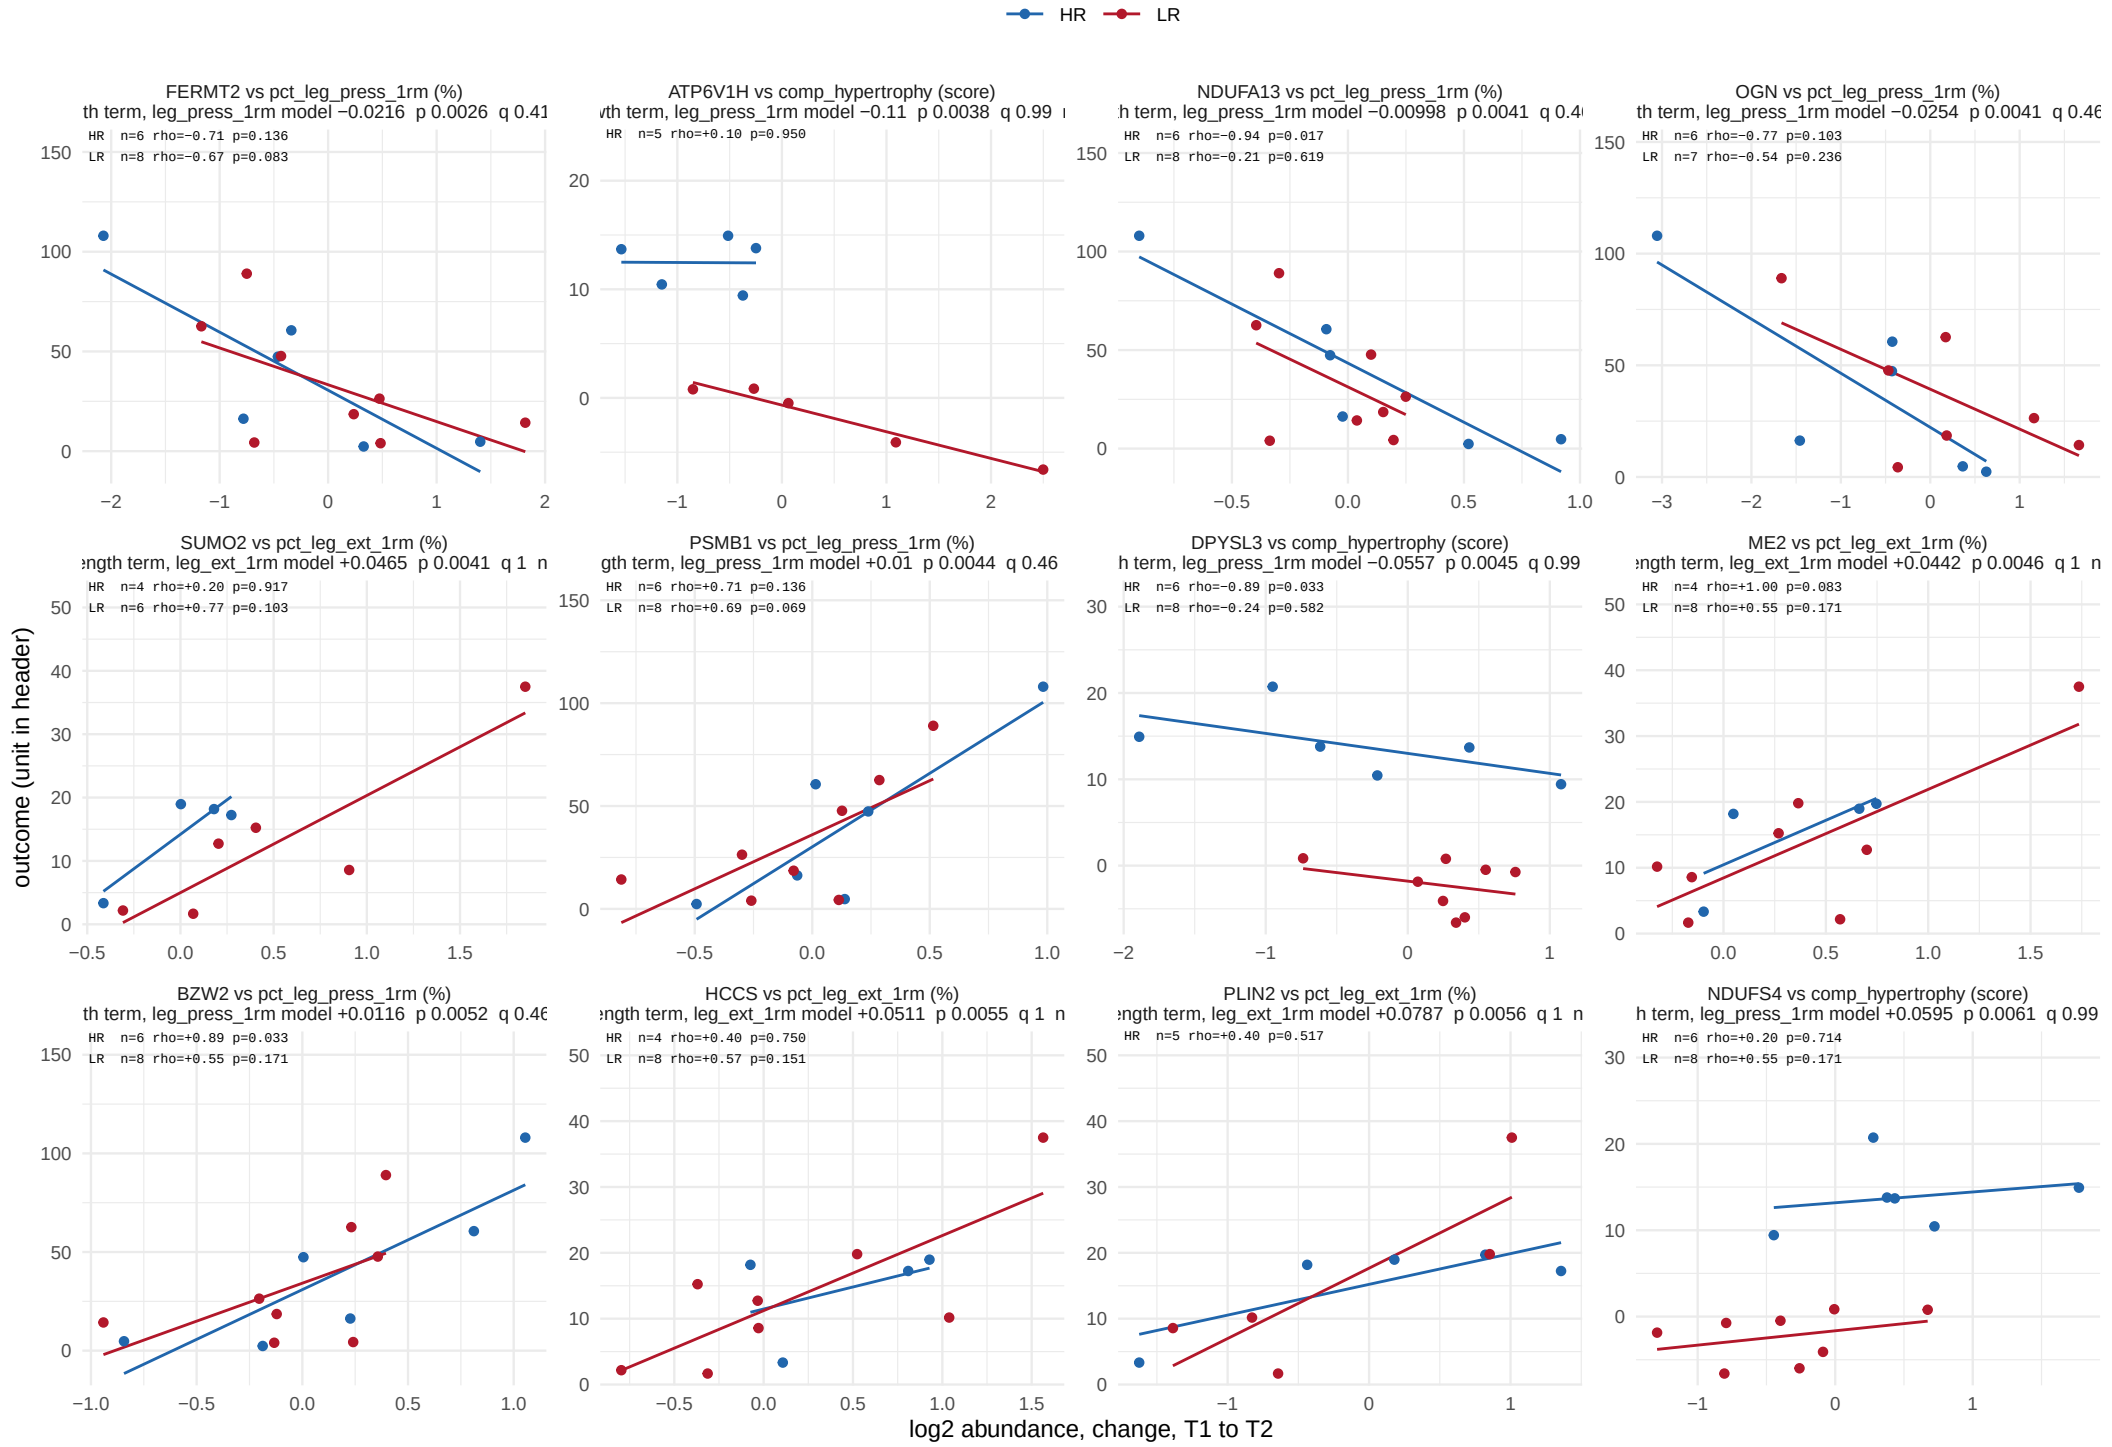

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, training window


260 of 5676 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 3 of 22.

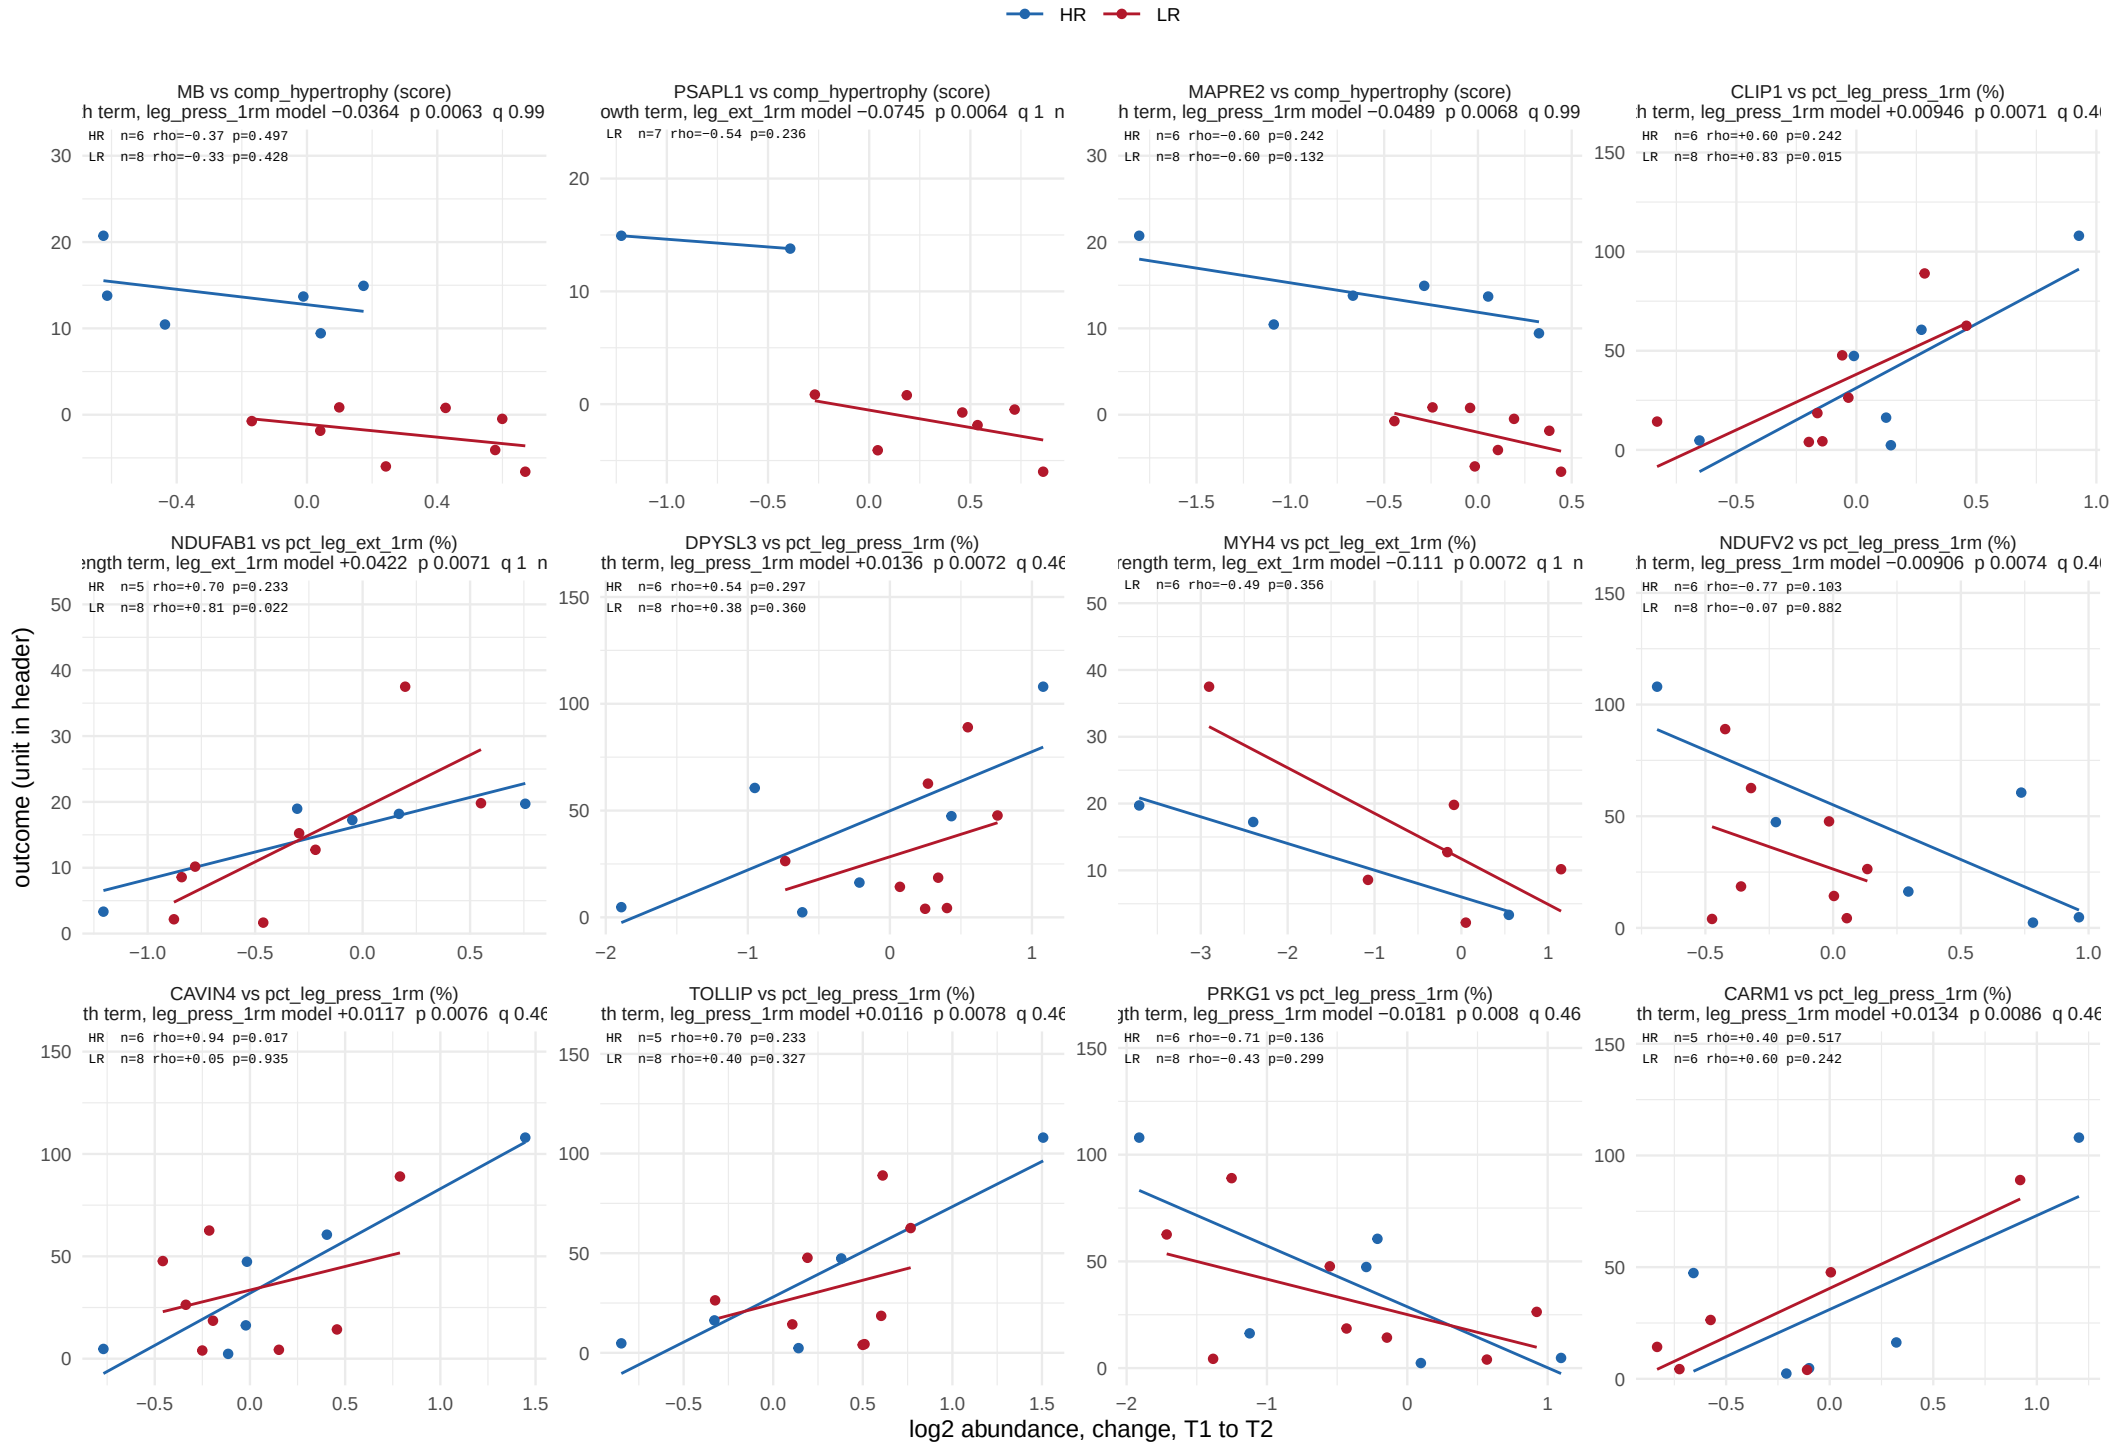

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, training window


260 of 5676 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 4 of 22.

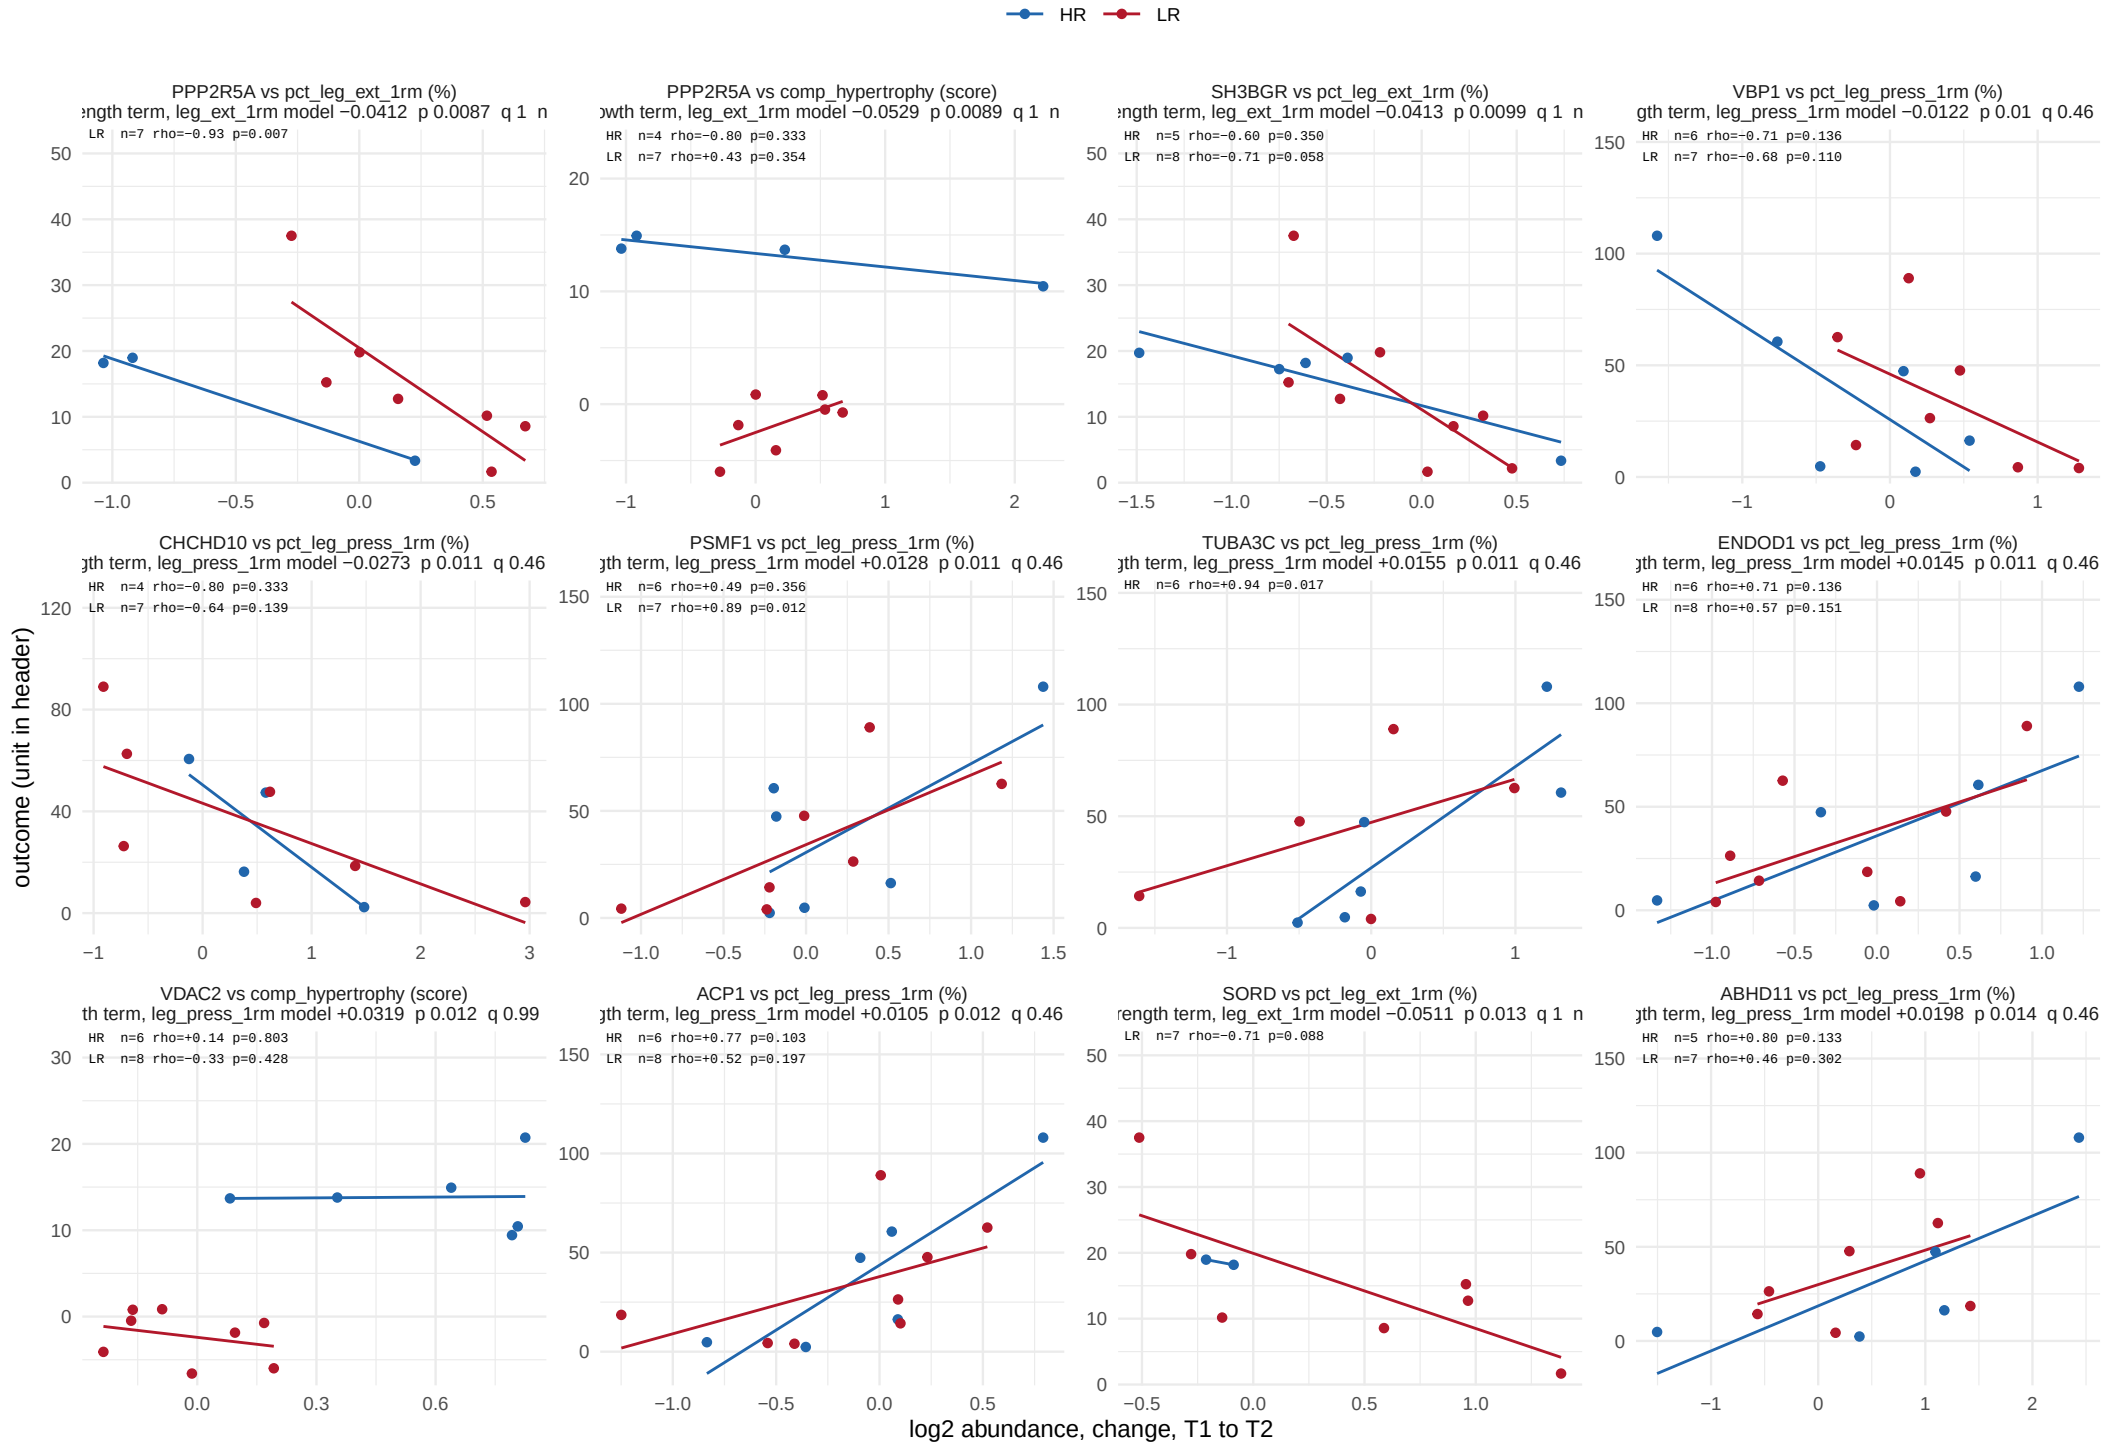

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, training window


260 of 5676 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 5 of 22.

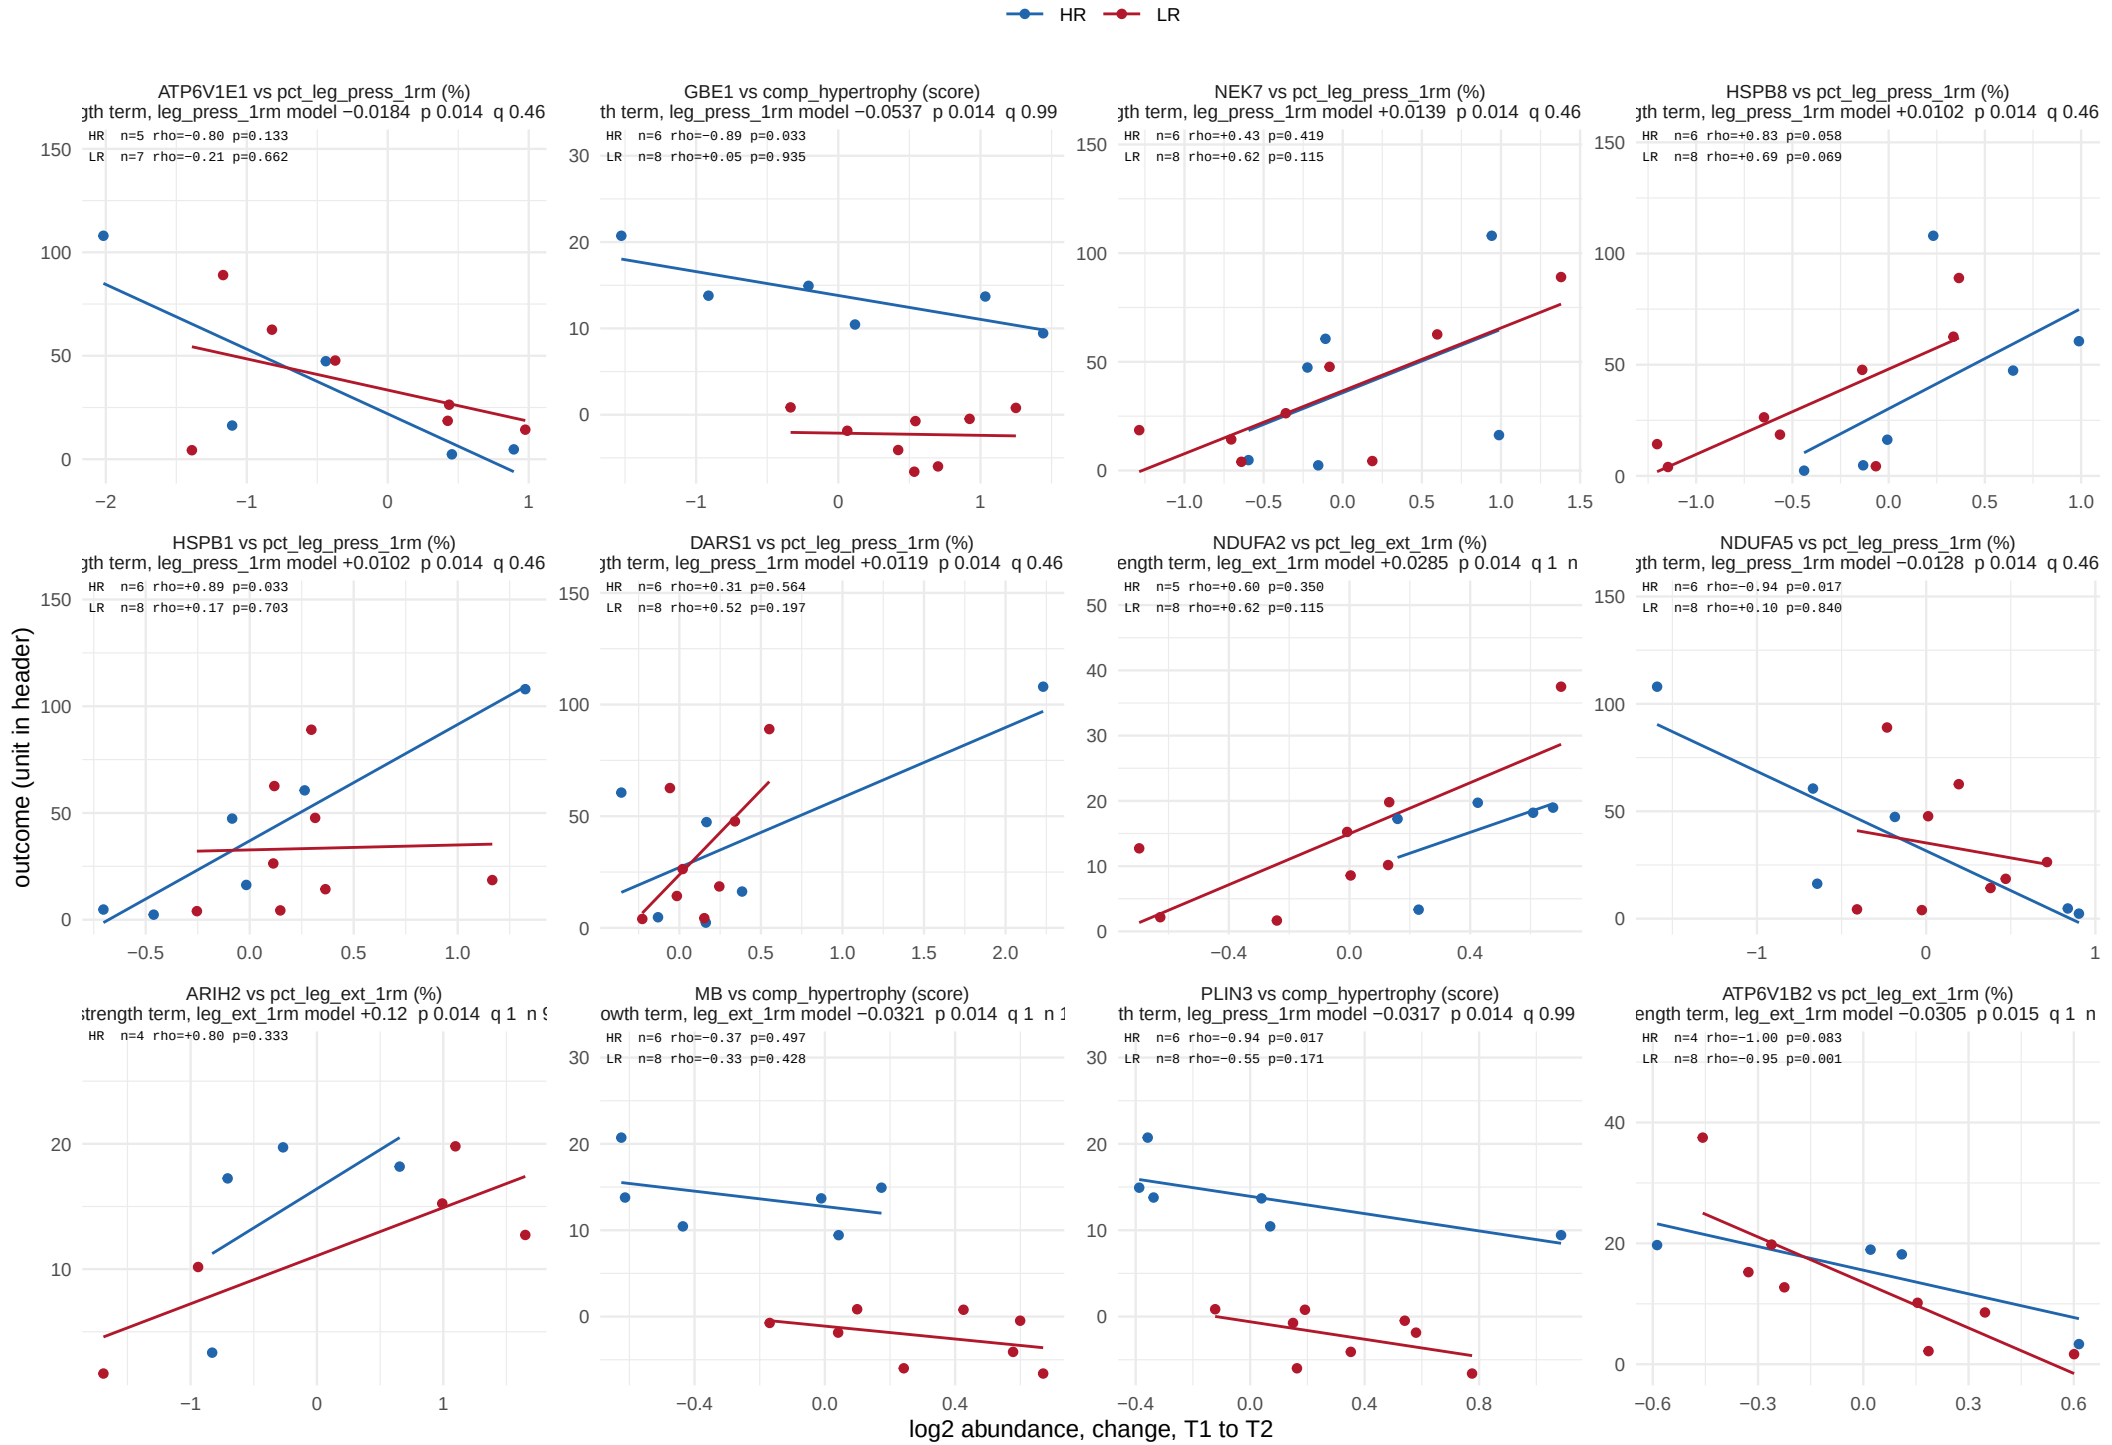

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, training window


260 of 5676 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 6 of 22.

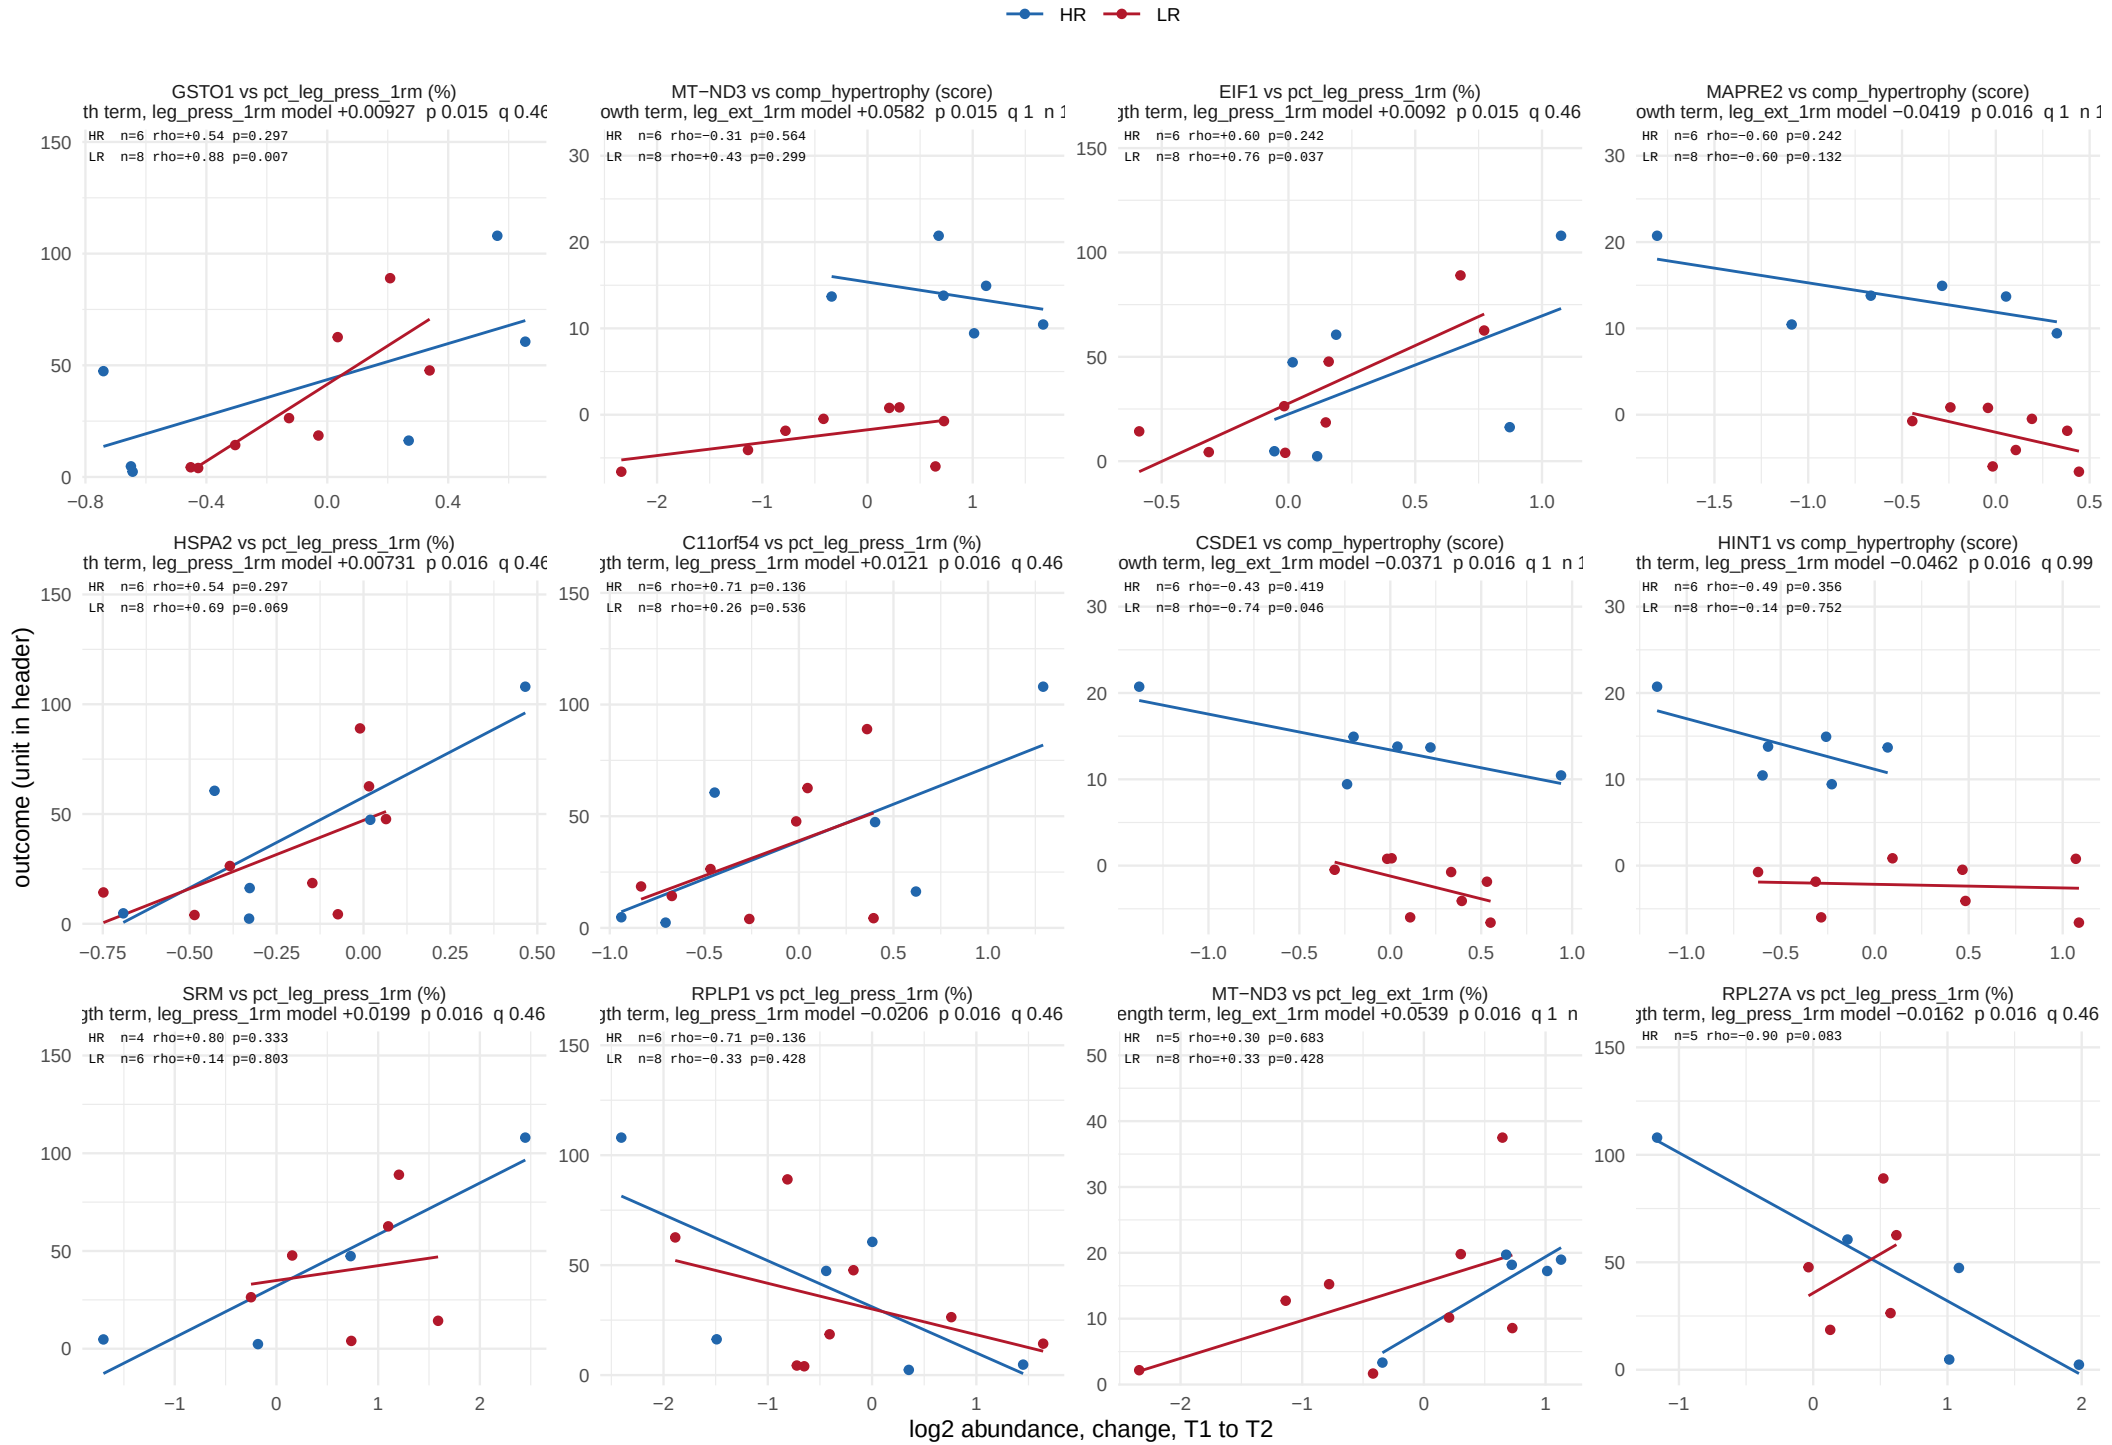

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, training window


260 of 5676 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 7 of 22.

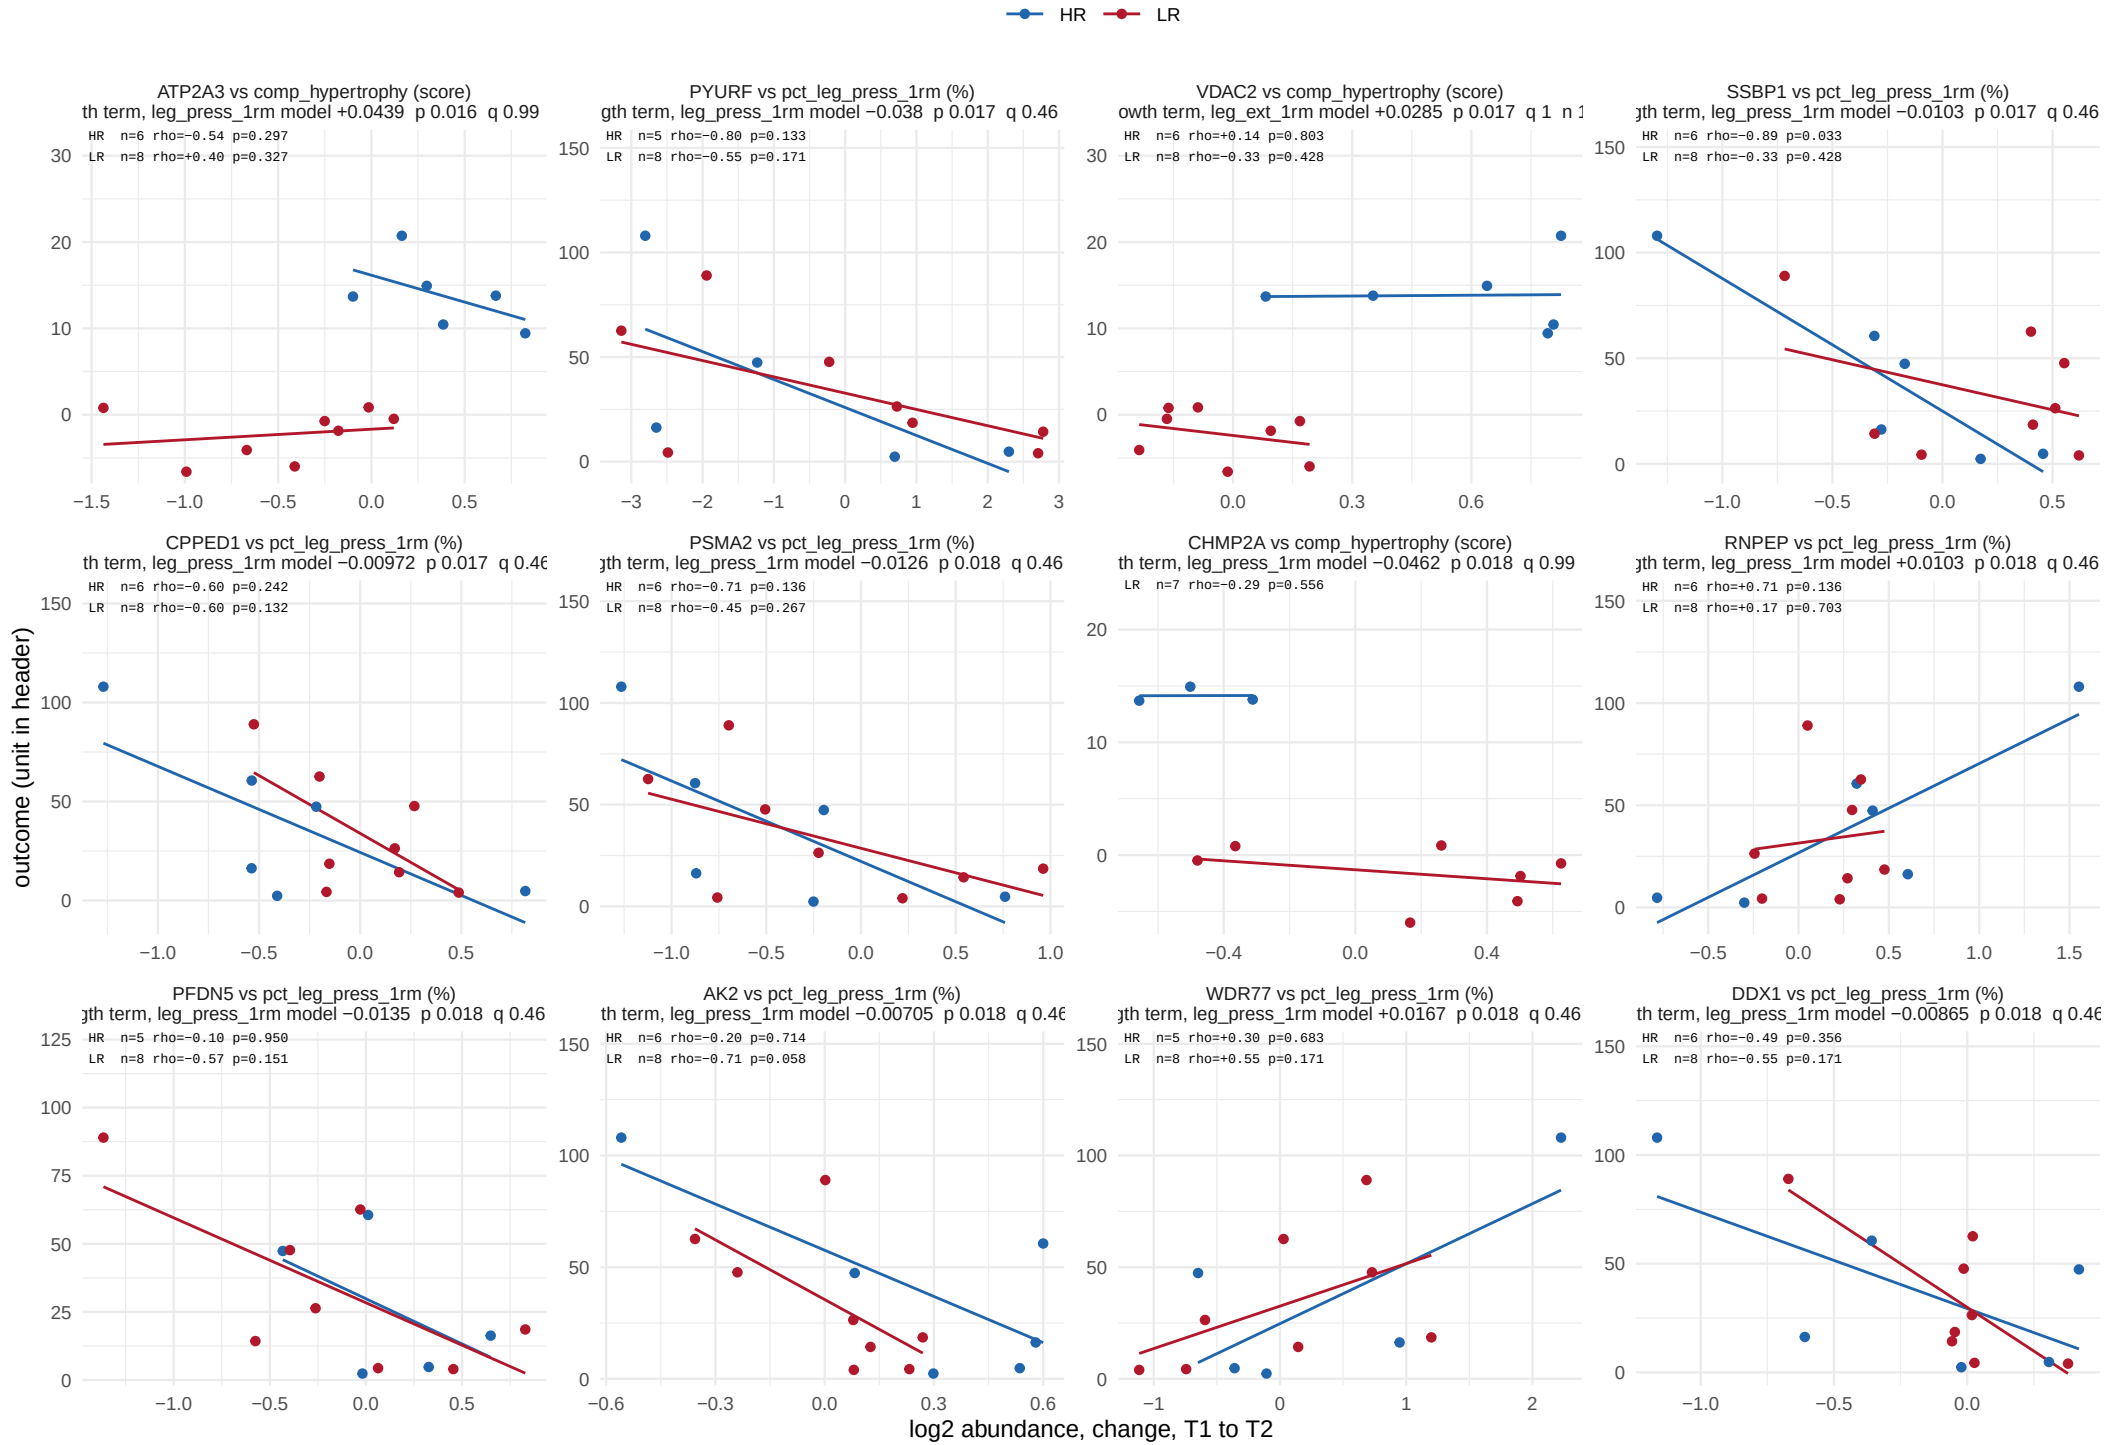

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, training window


260 of 5676 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 8 of 22.

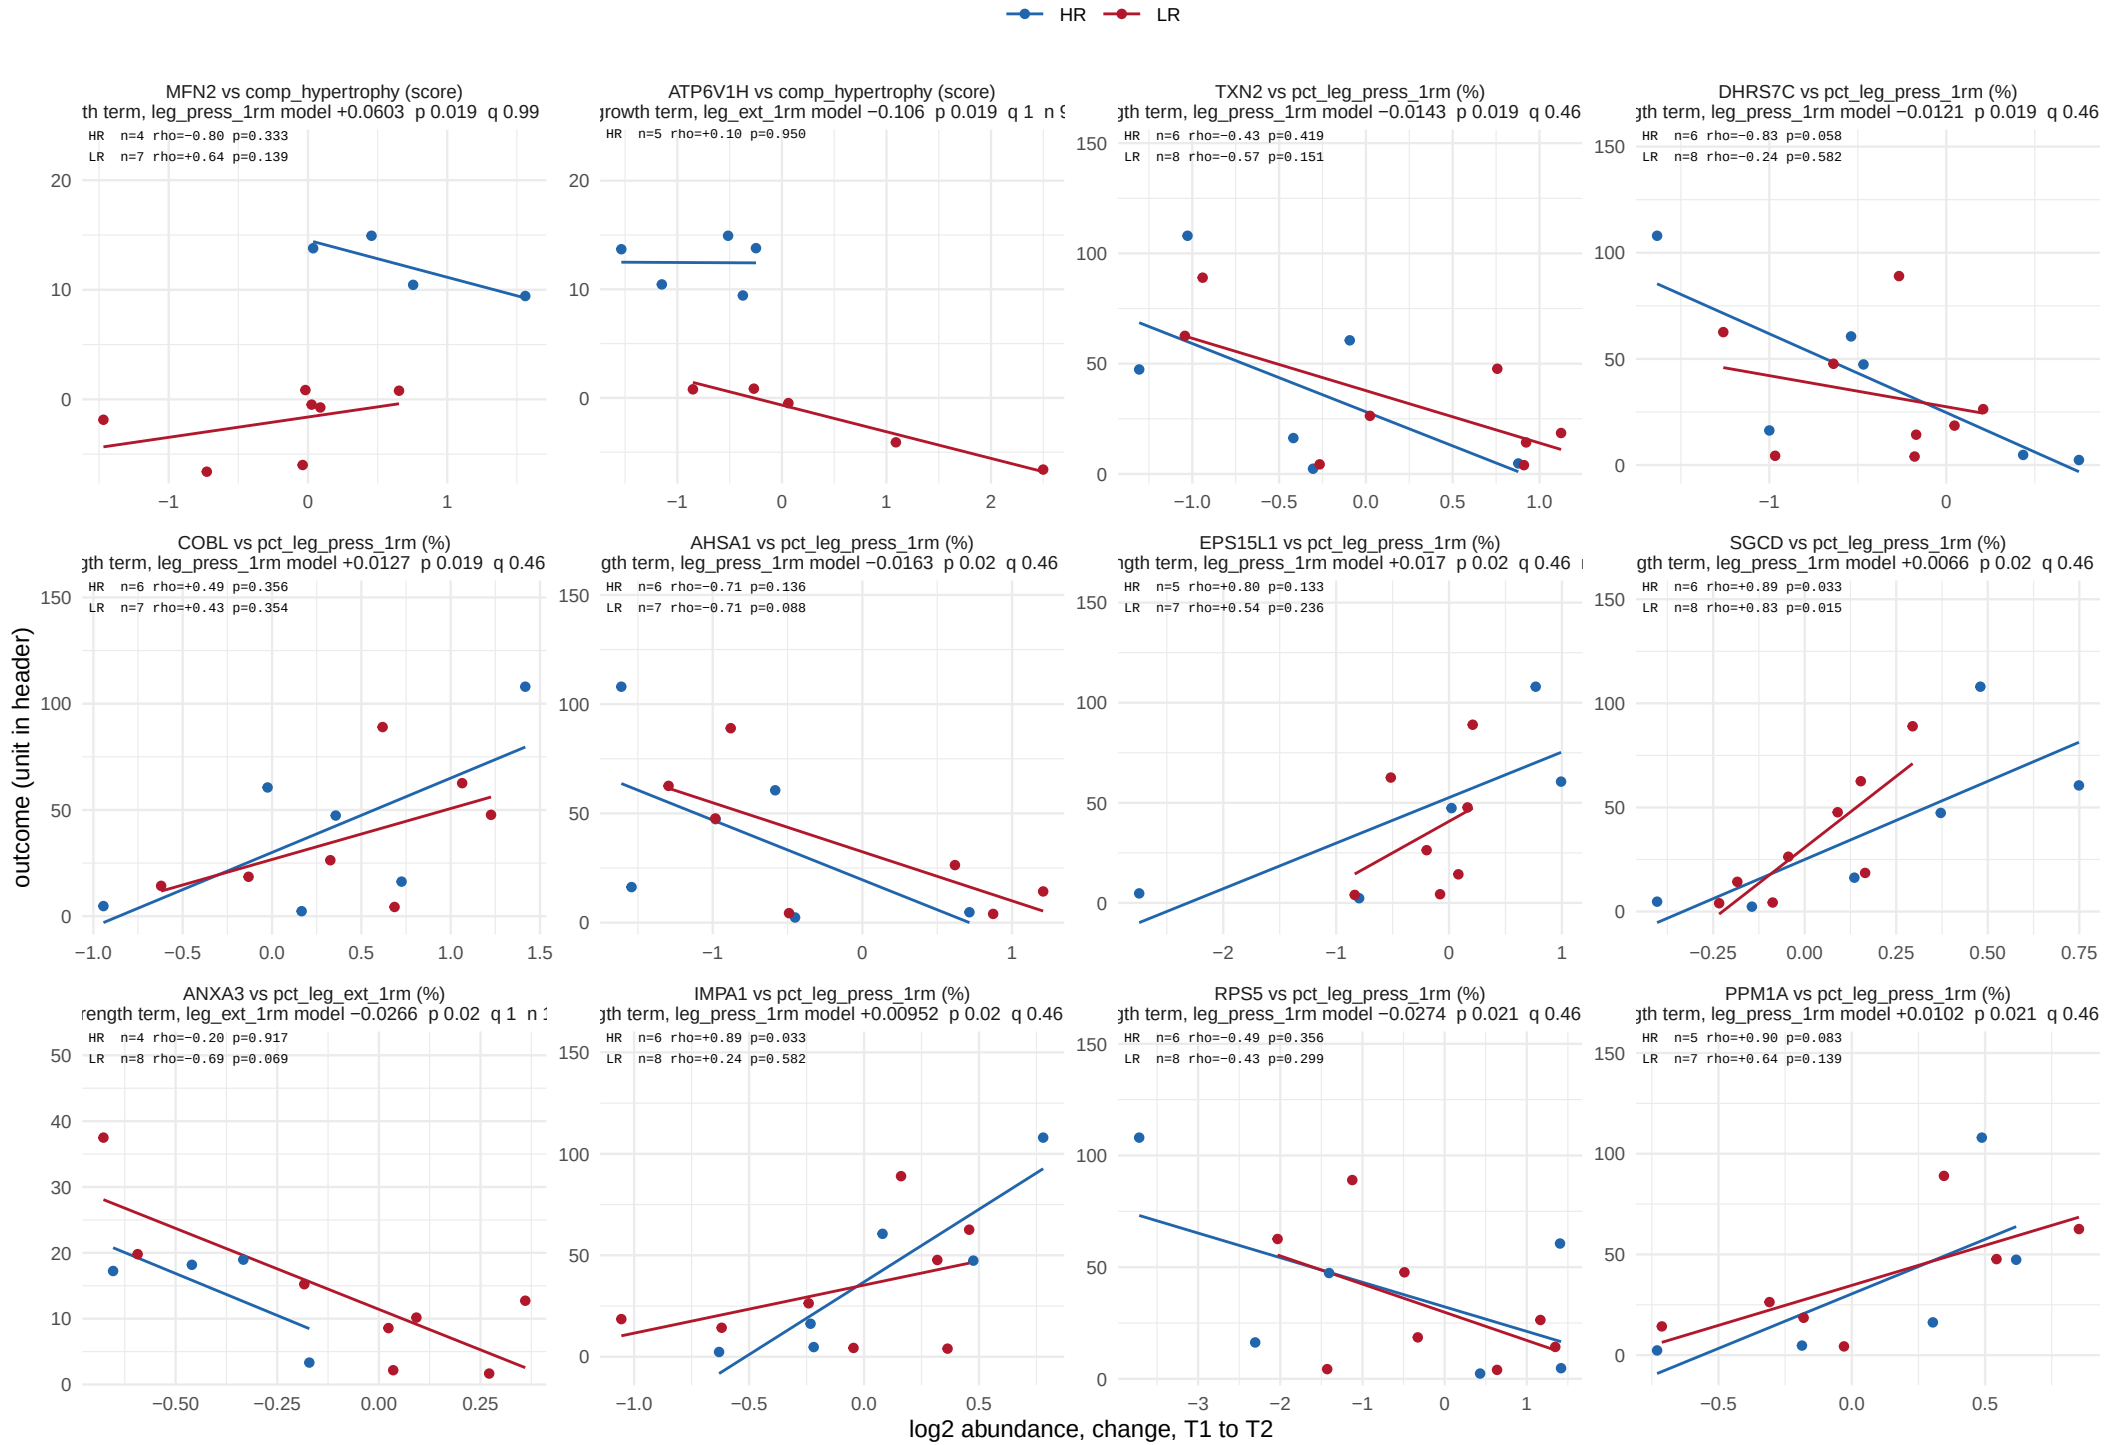

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, training window


260 of 5676 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 9 of 22.

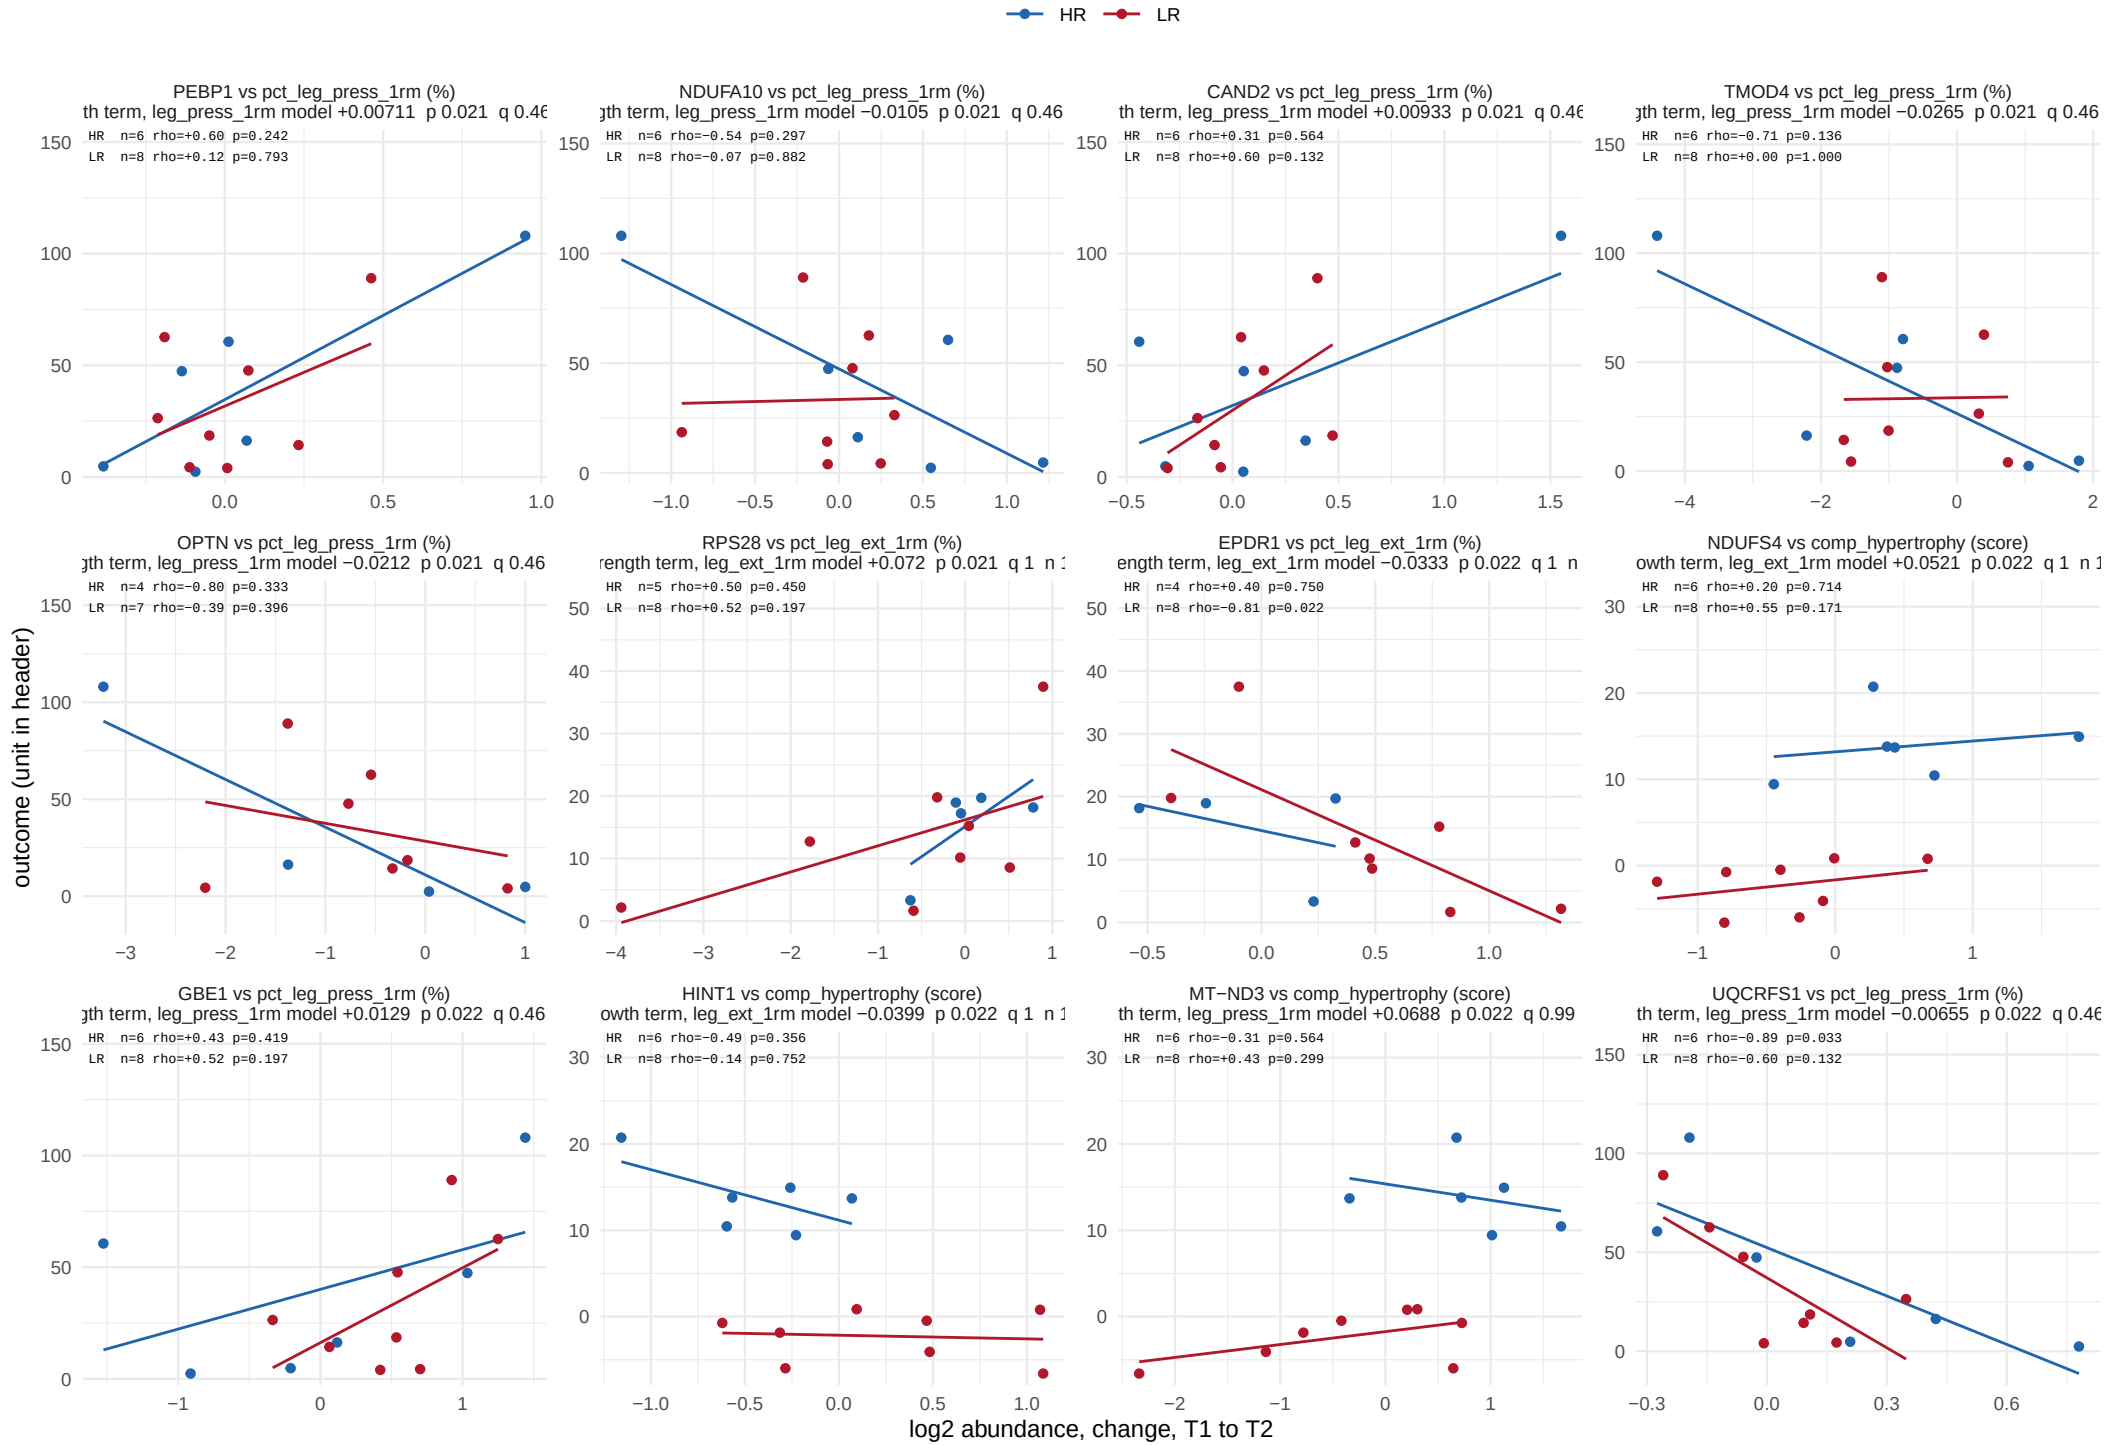

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, training window


260 of 5676 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 10 of 22.

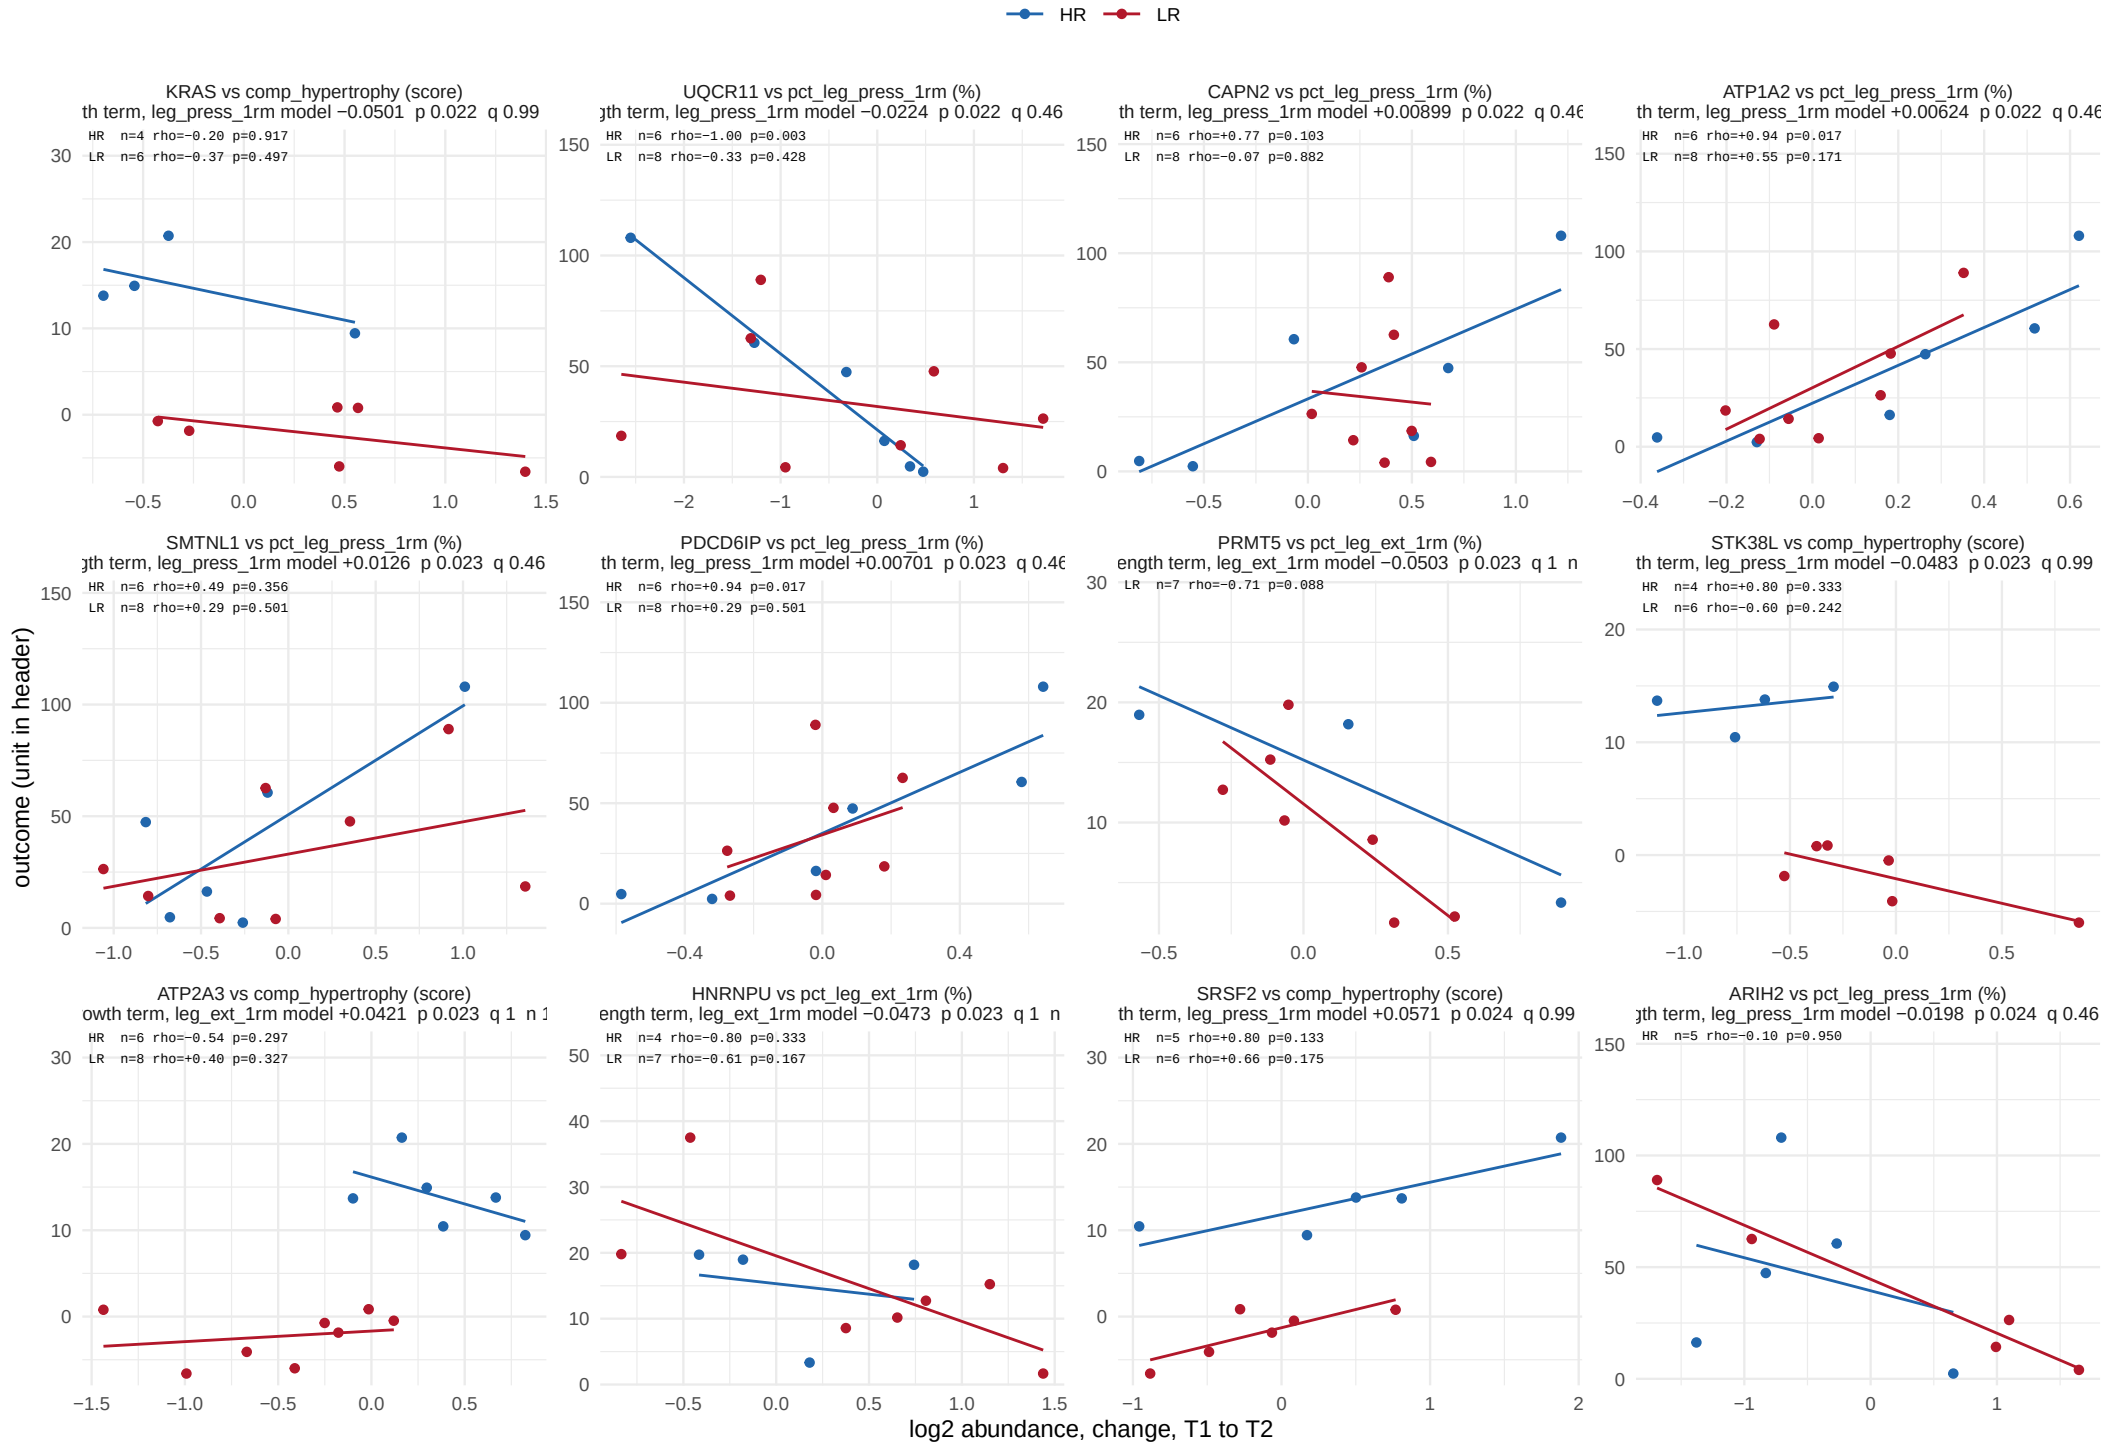

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, training window


260 of 5676 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 11 of 22.

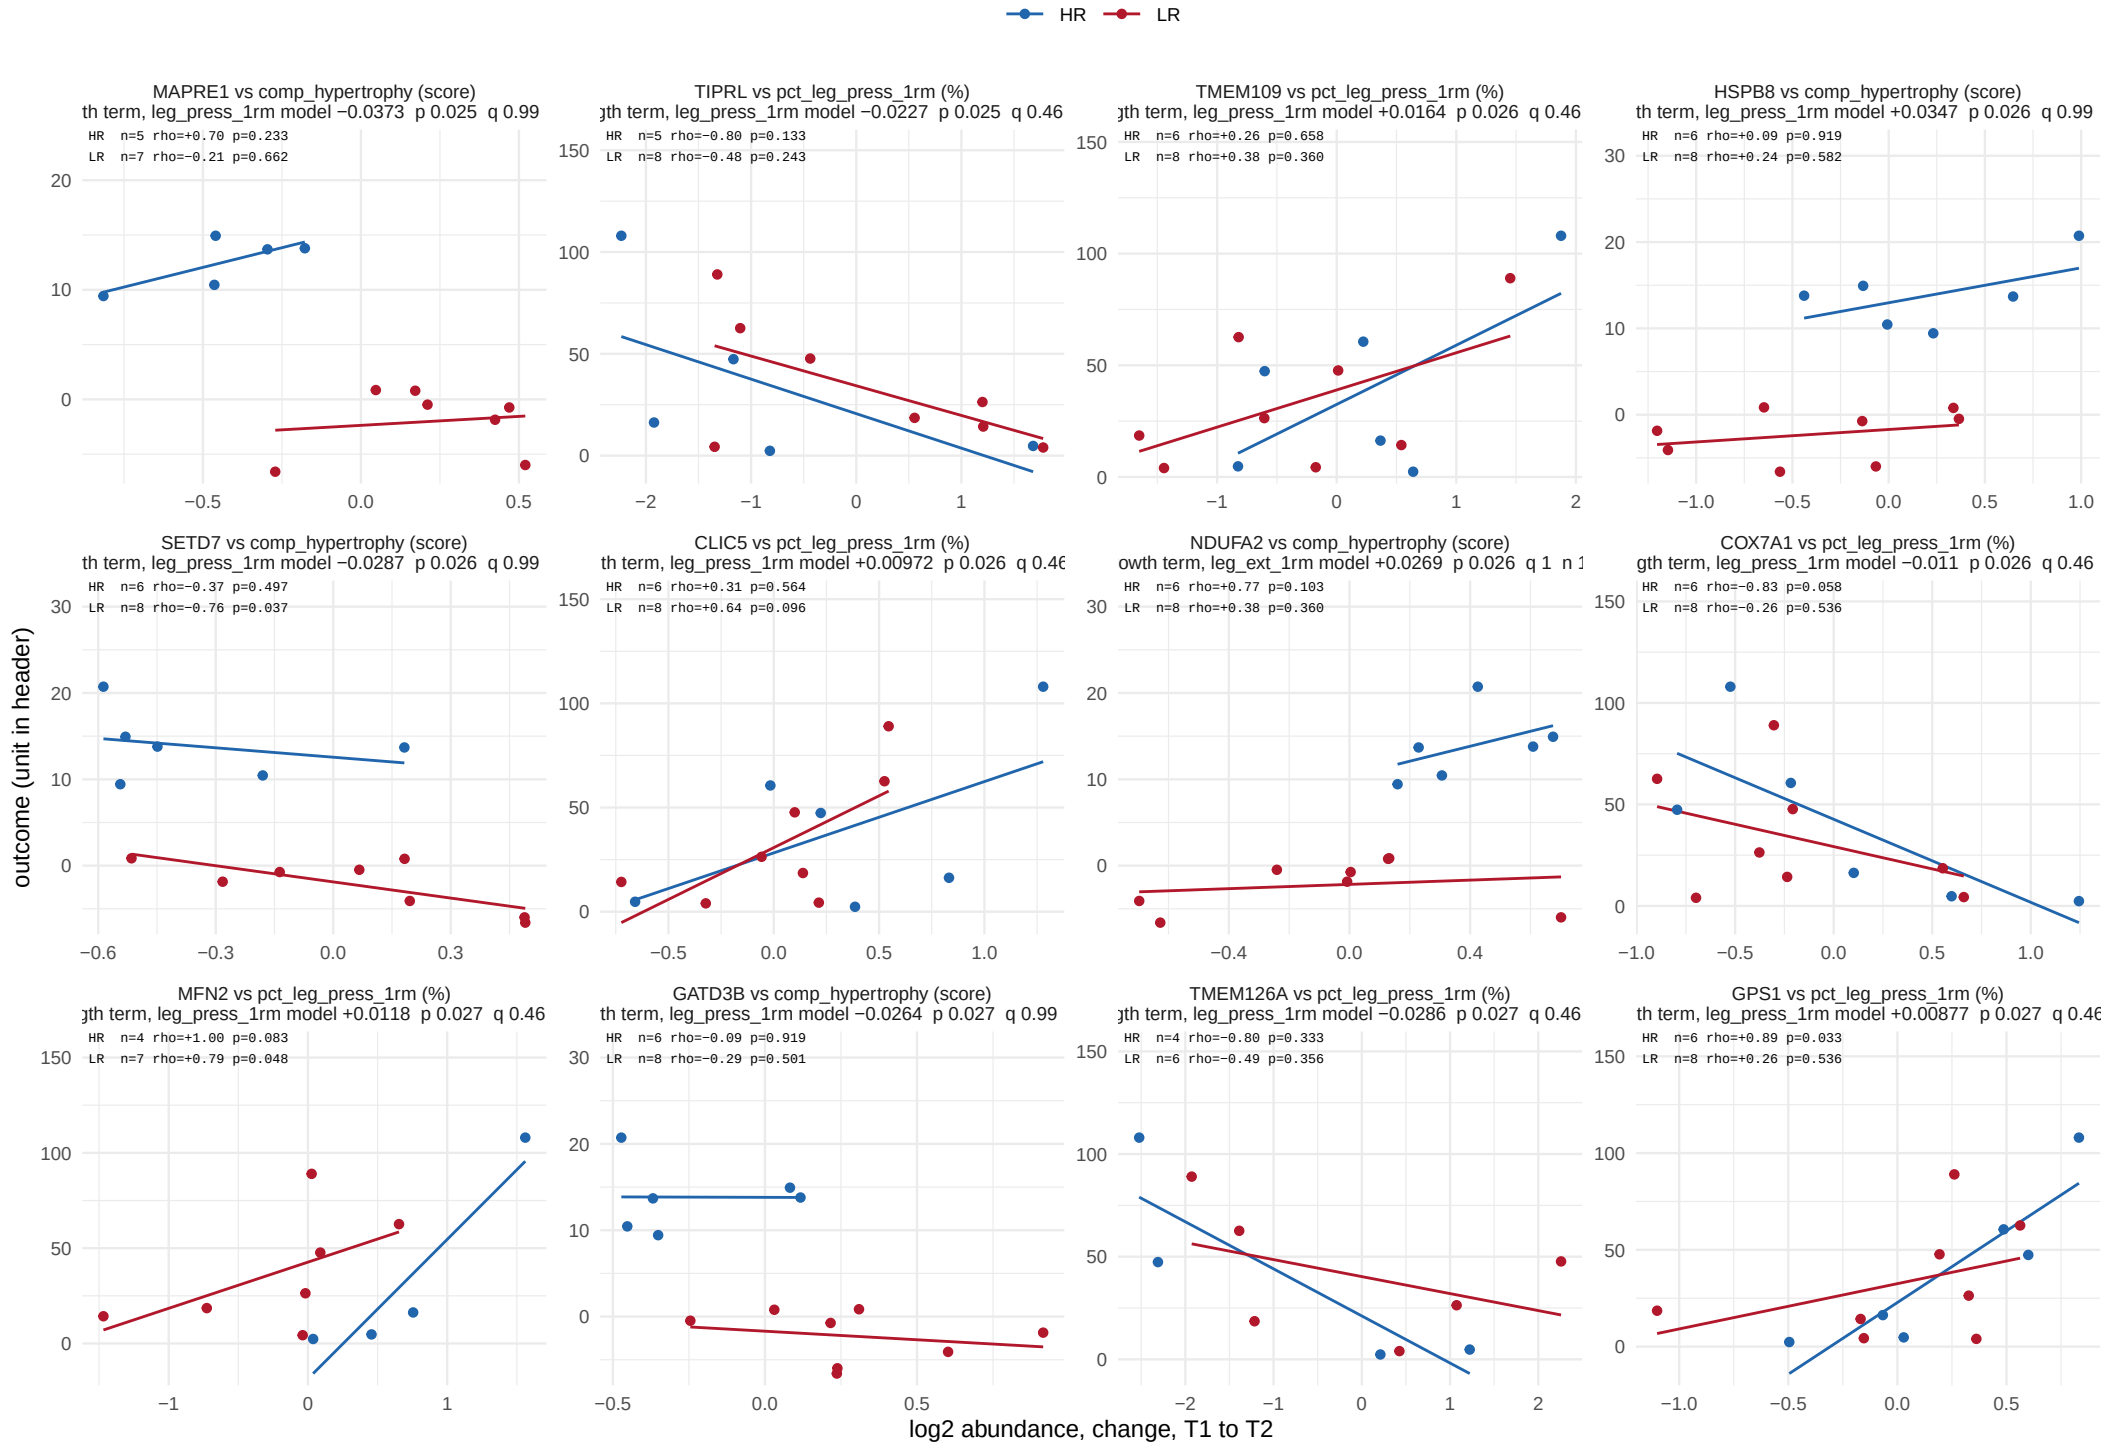

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, training window


260 of 5676 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 12 of 22.

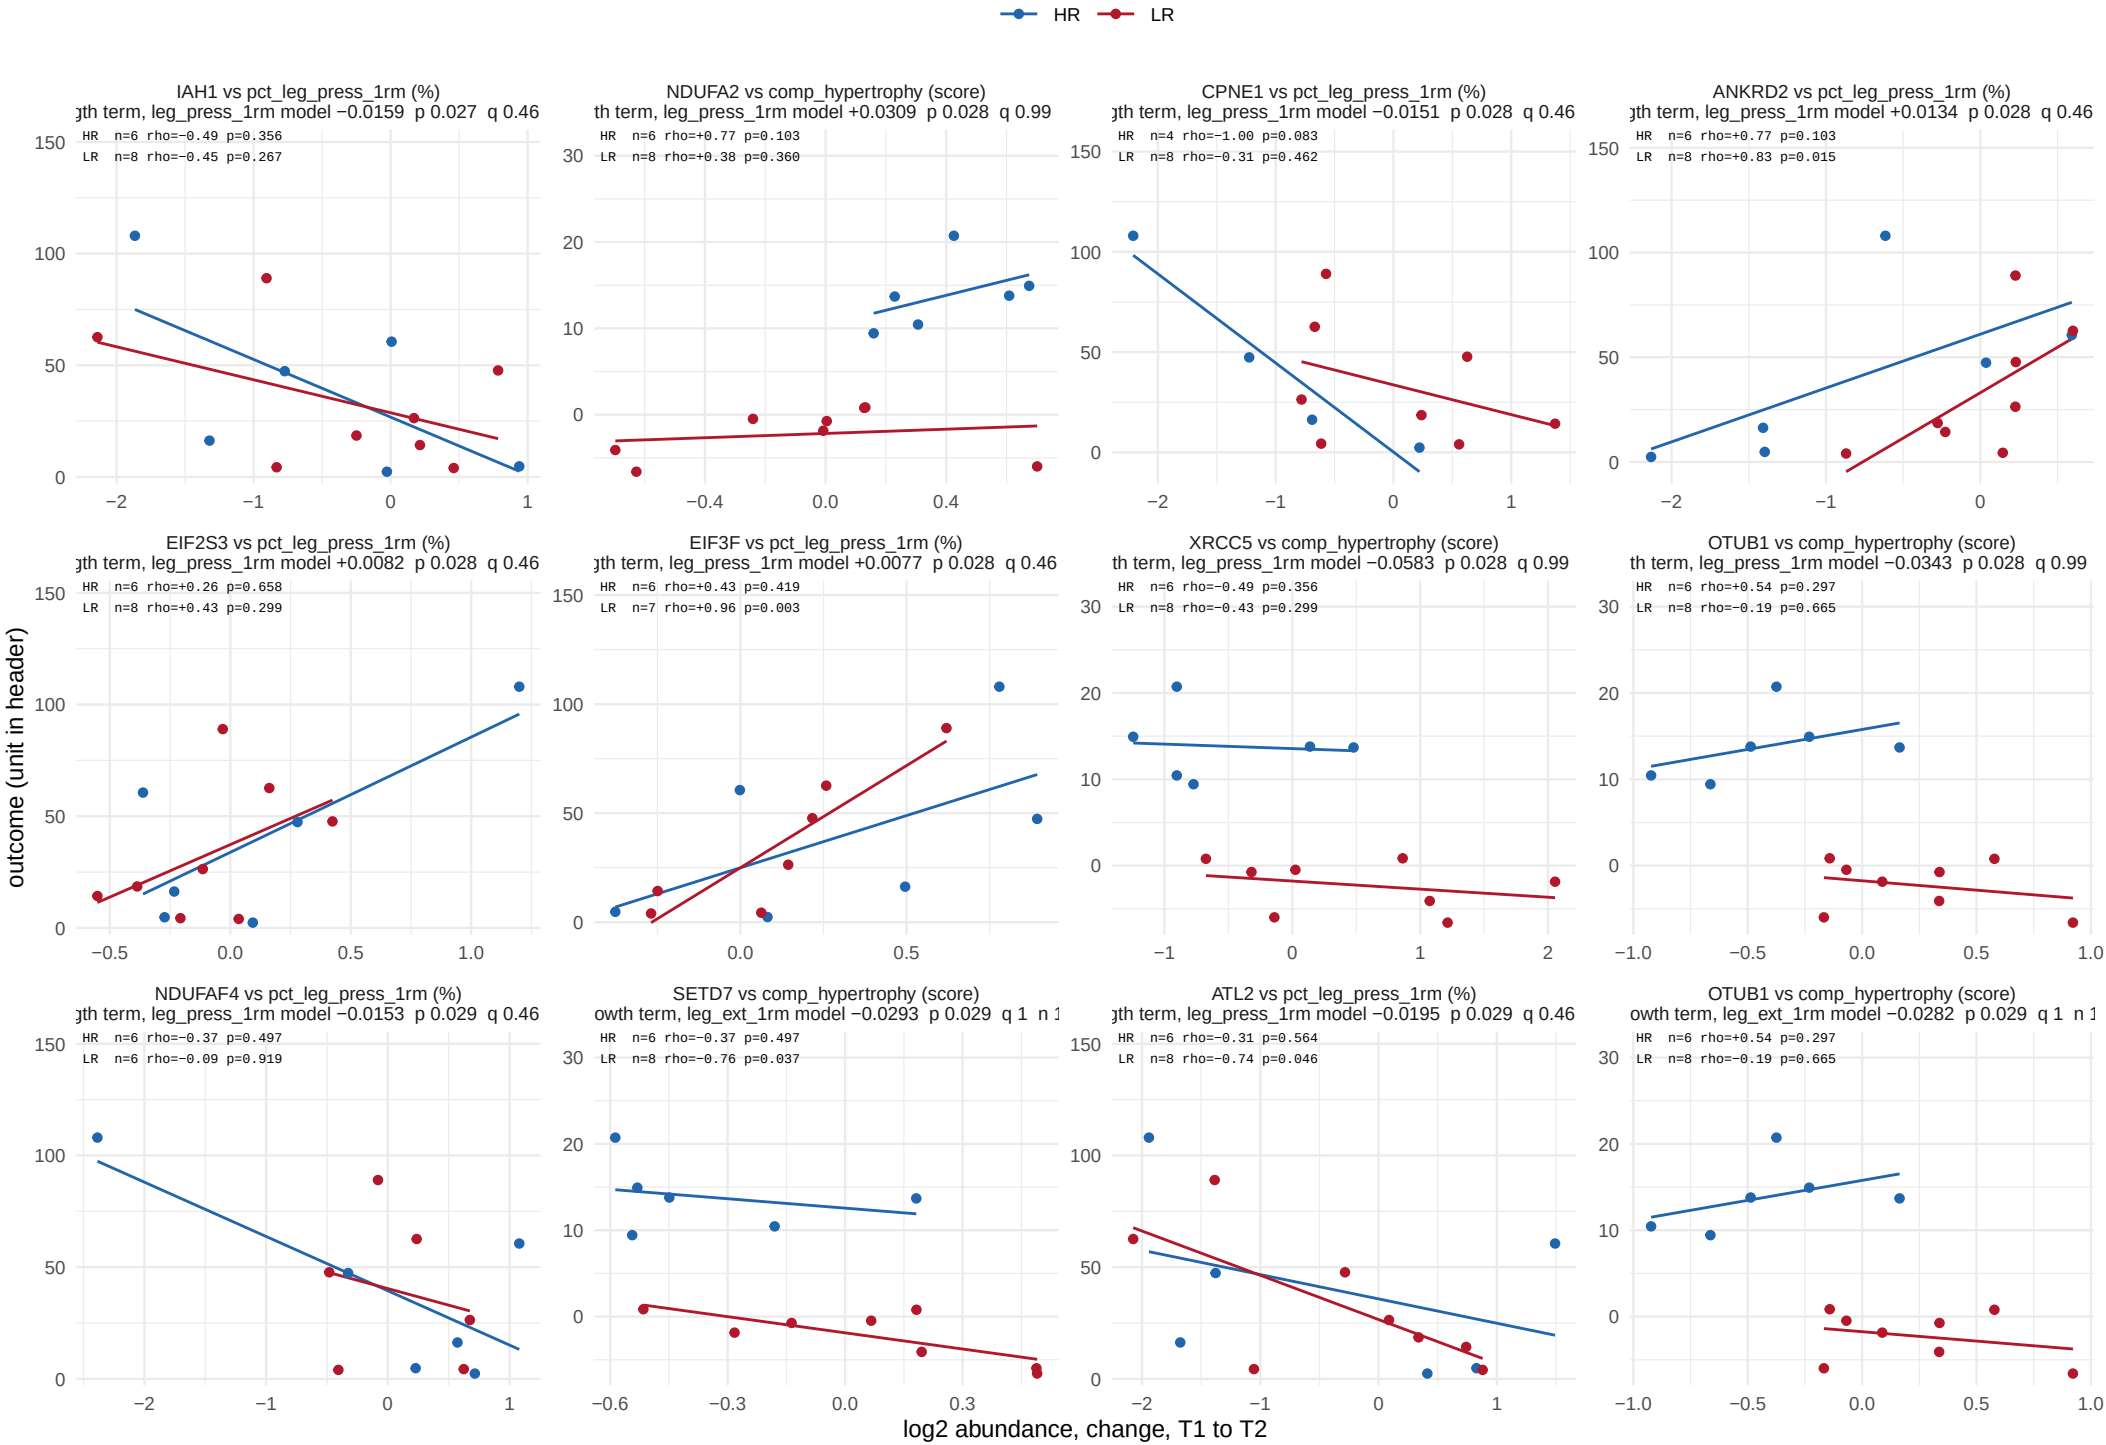

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, training window


260 of 5676 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 13 of 22.

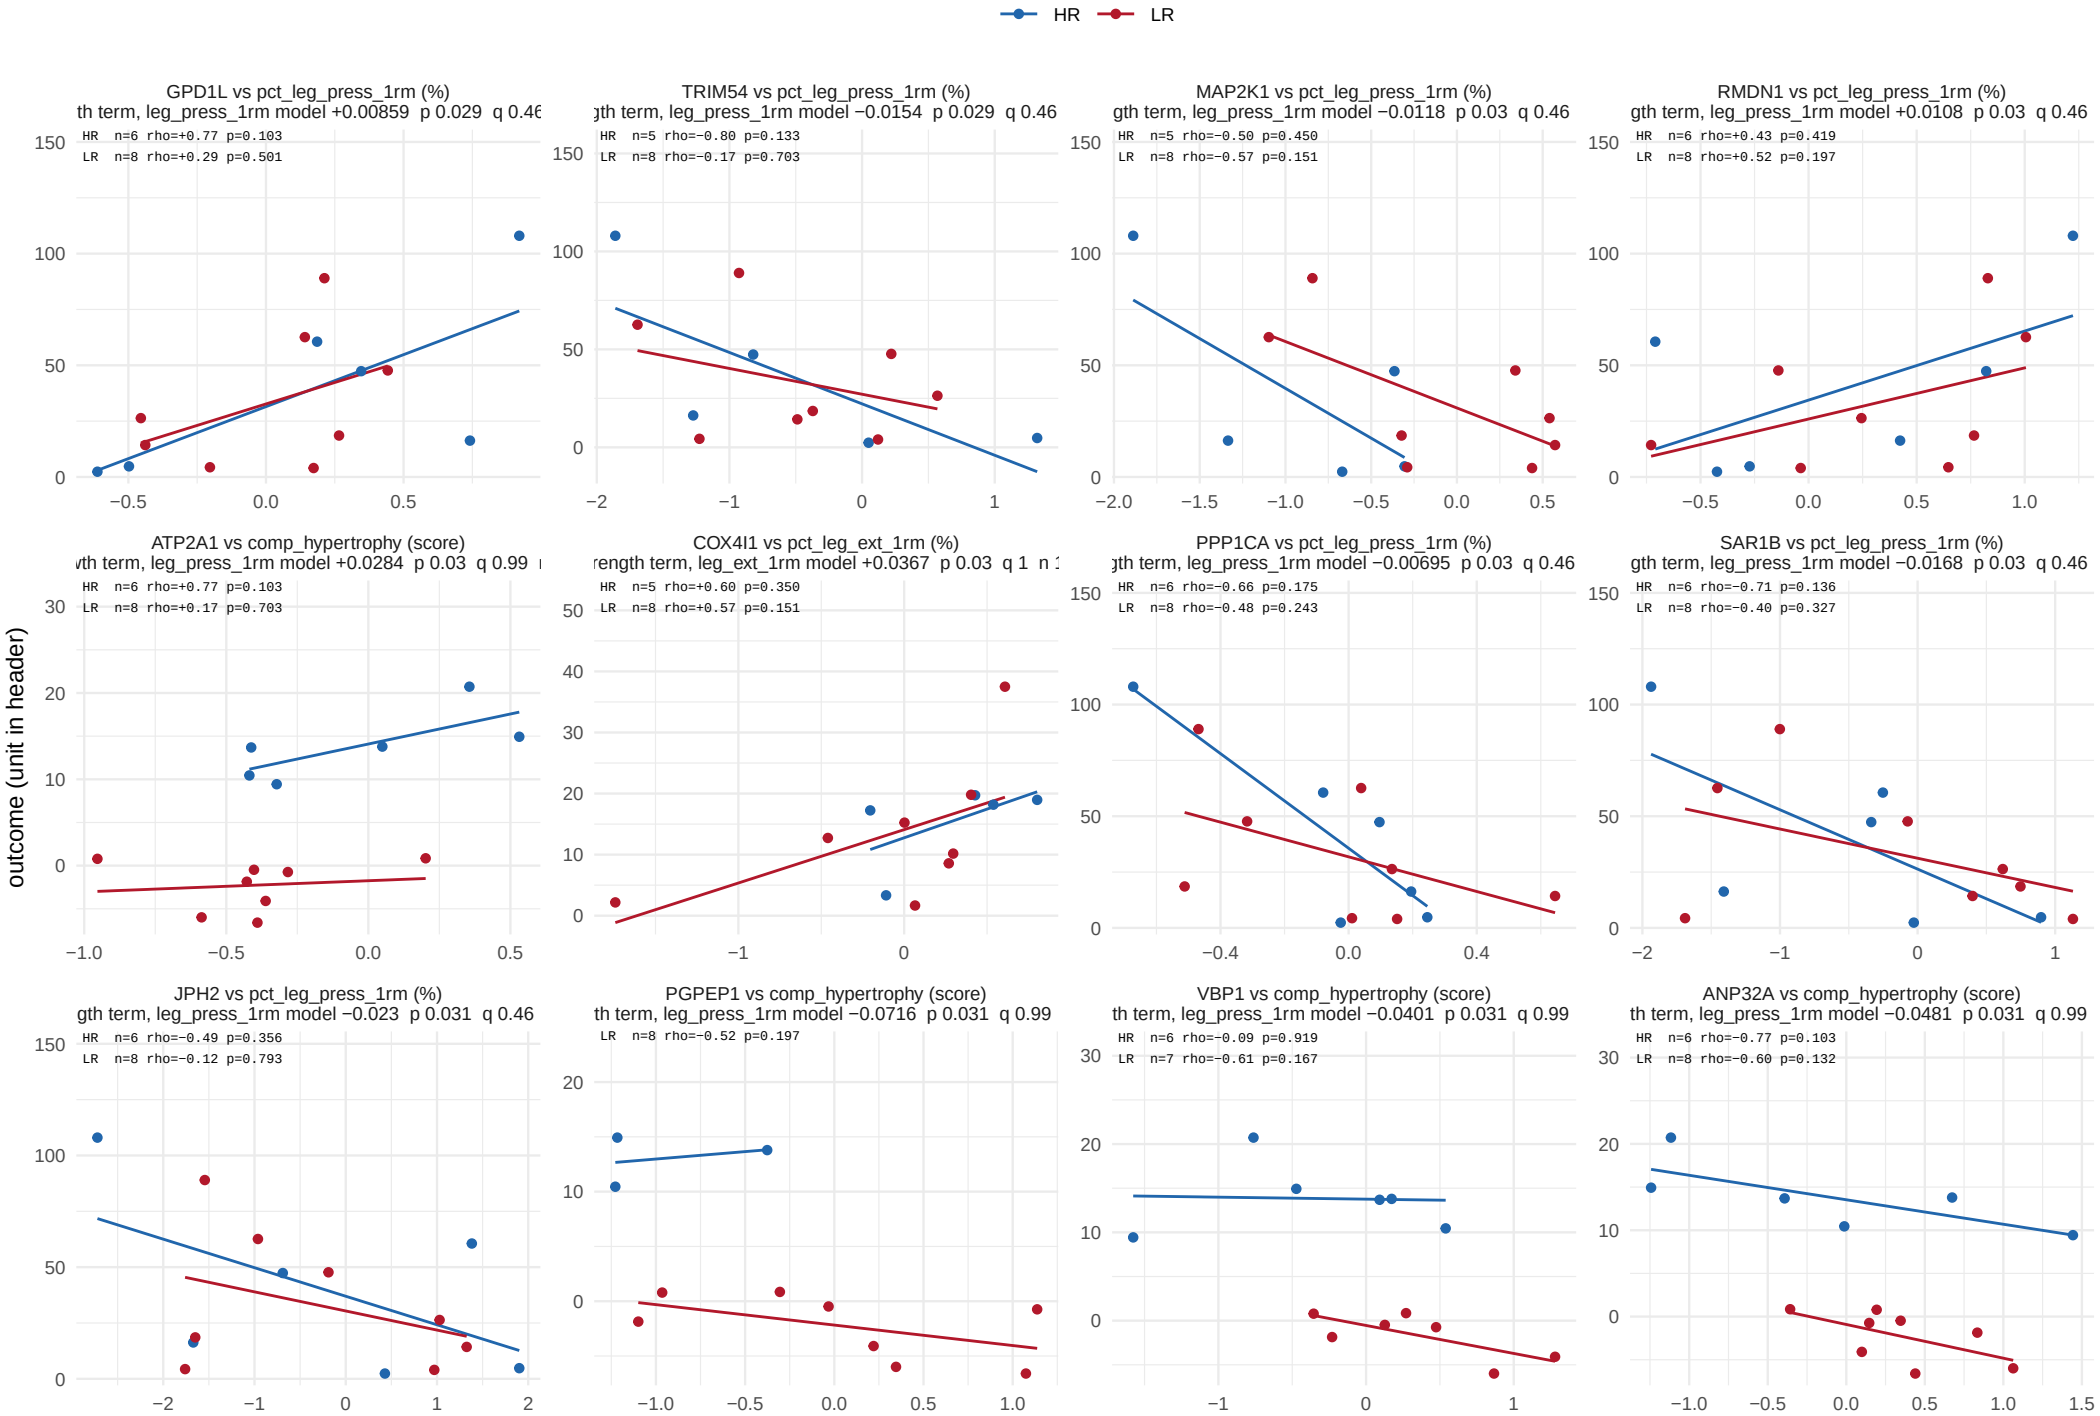

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, training window


260 of 5676 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 14 of 22.

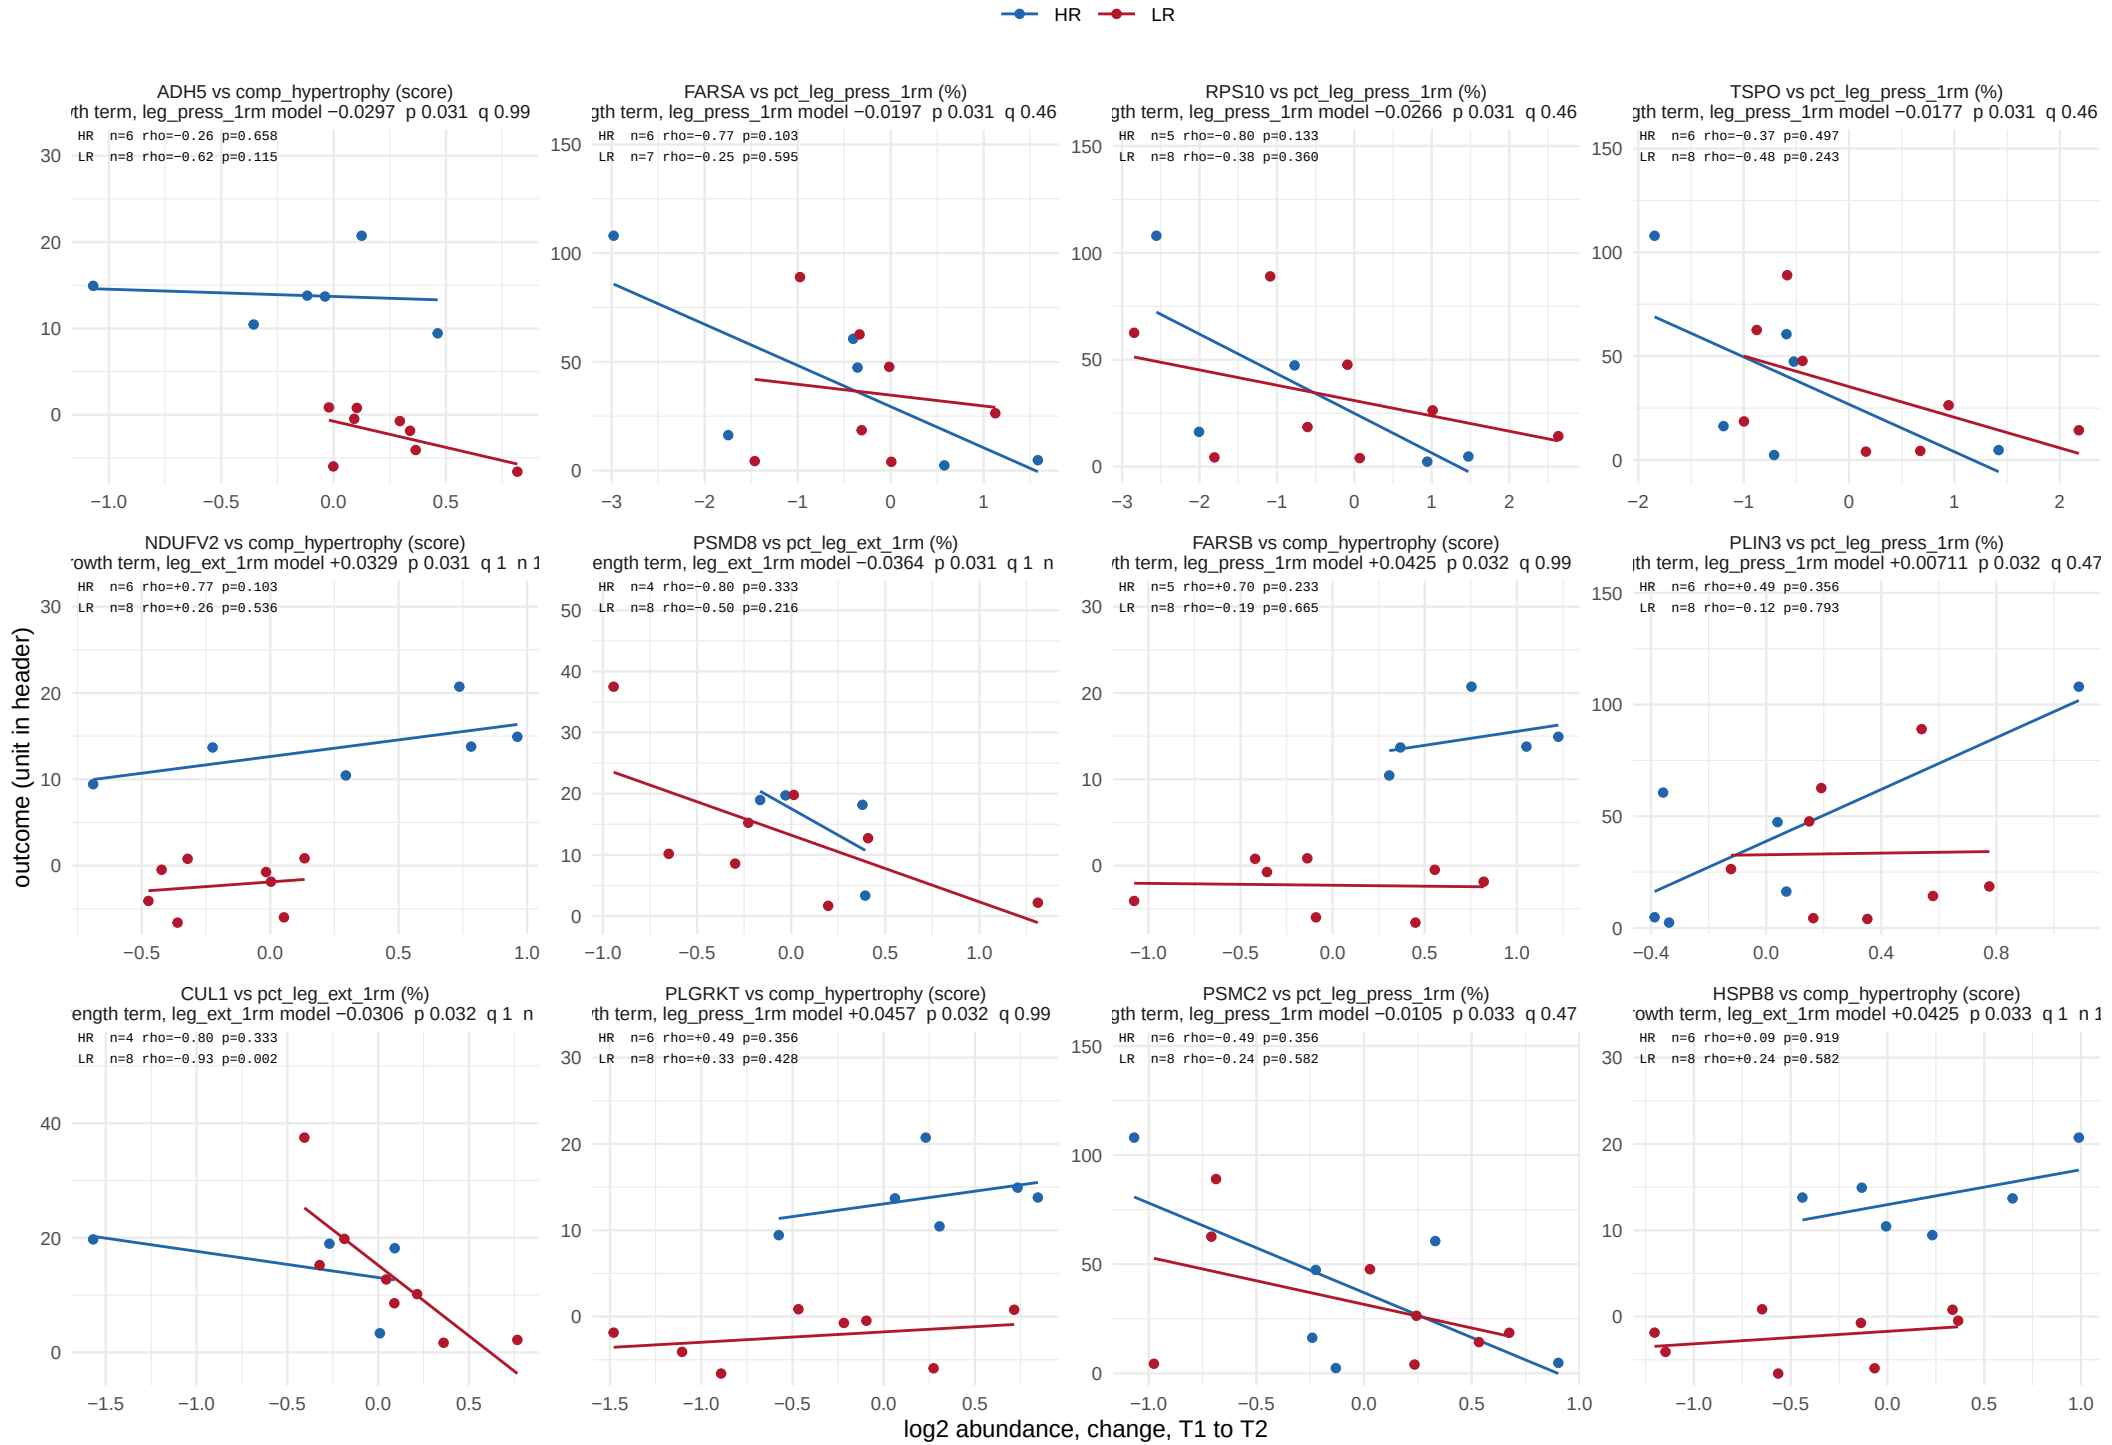

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, training window


260 of 5676 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 15 of 22.

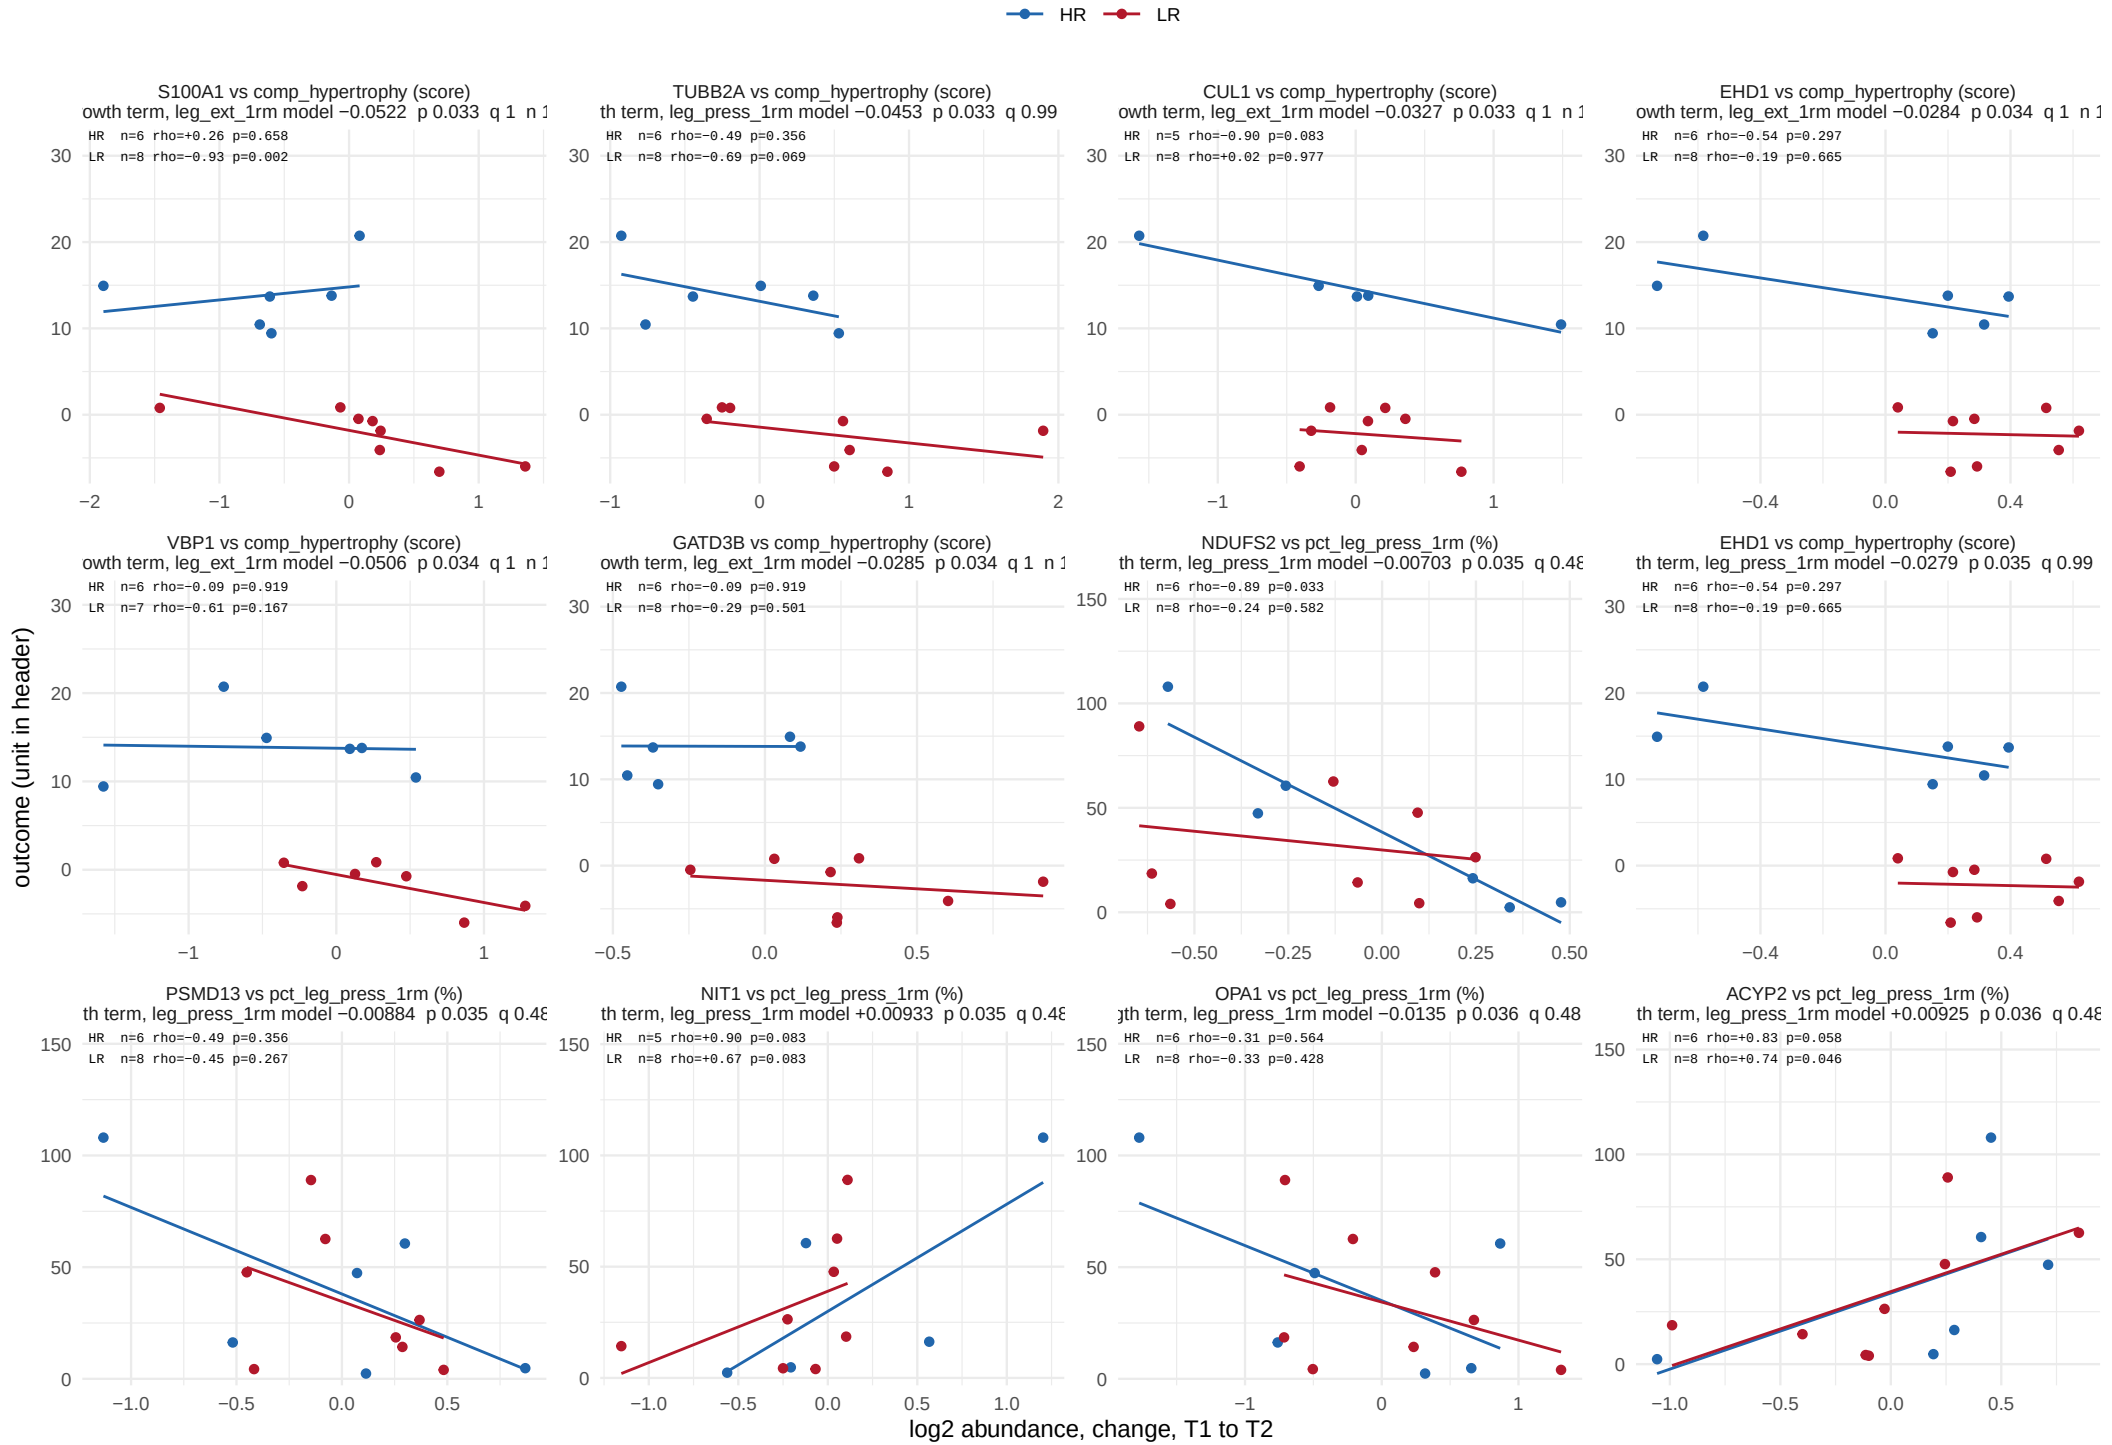

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, training window


260 of 5676 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 16 of 22.

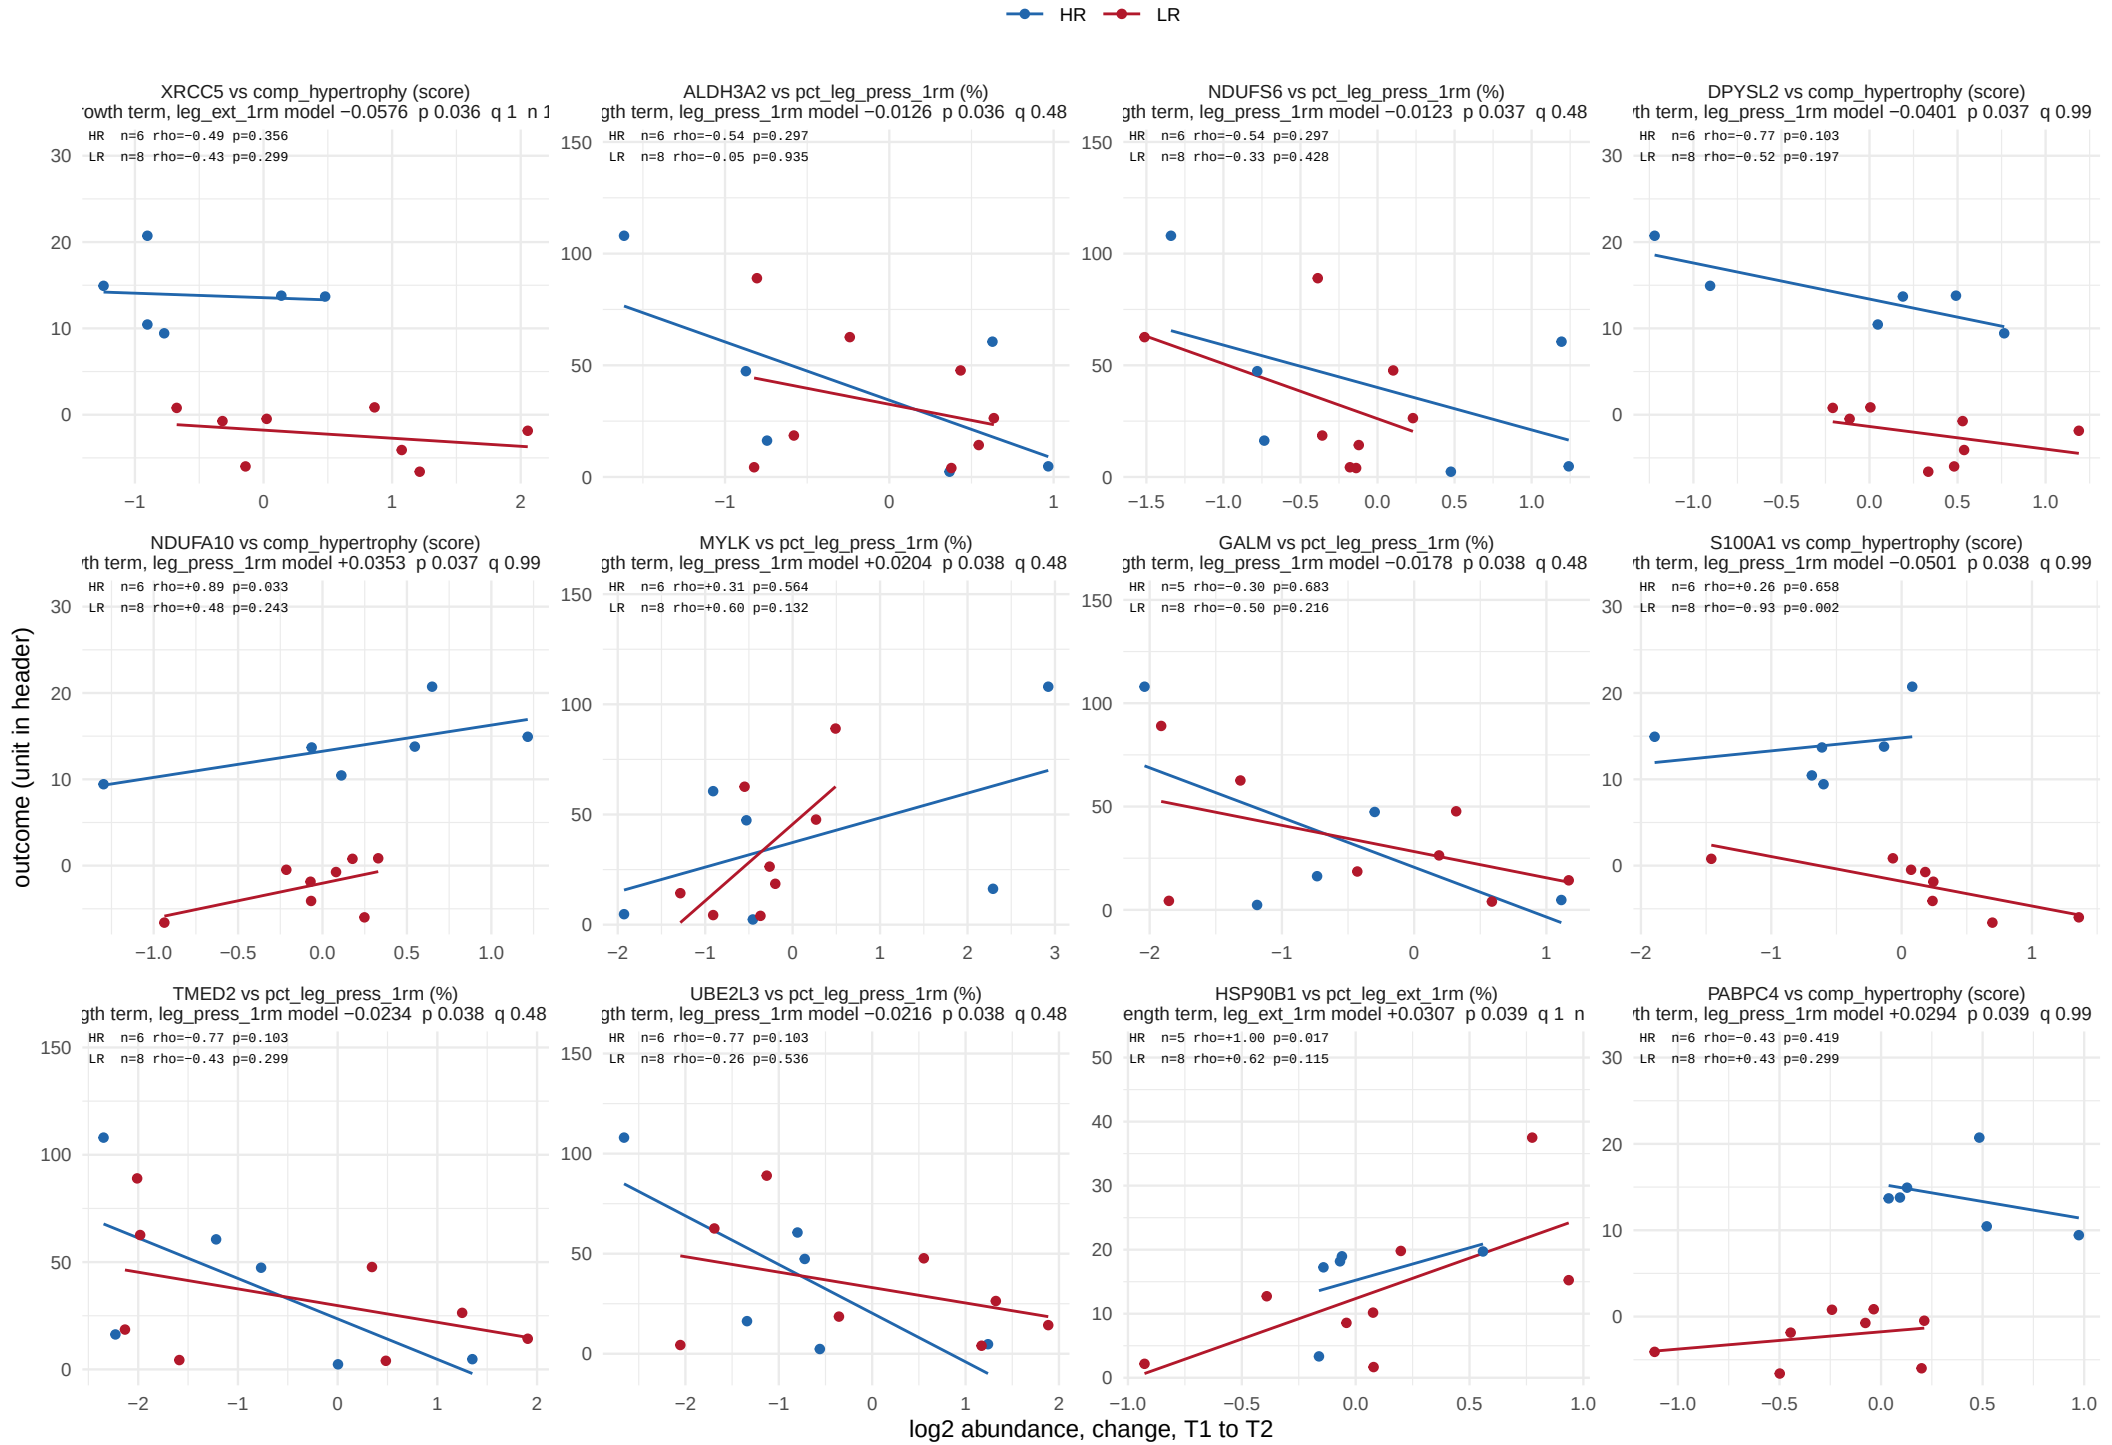

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, training window


260 of 5676 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 17 of 22.

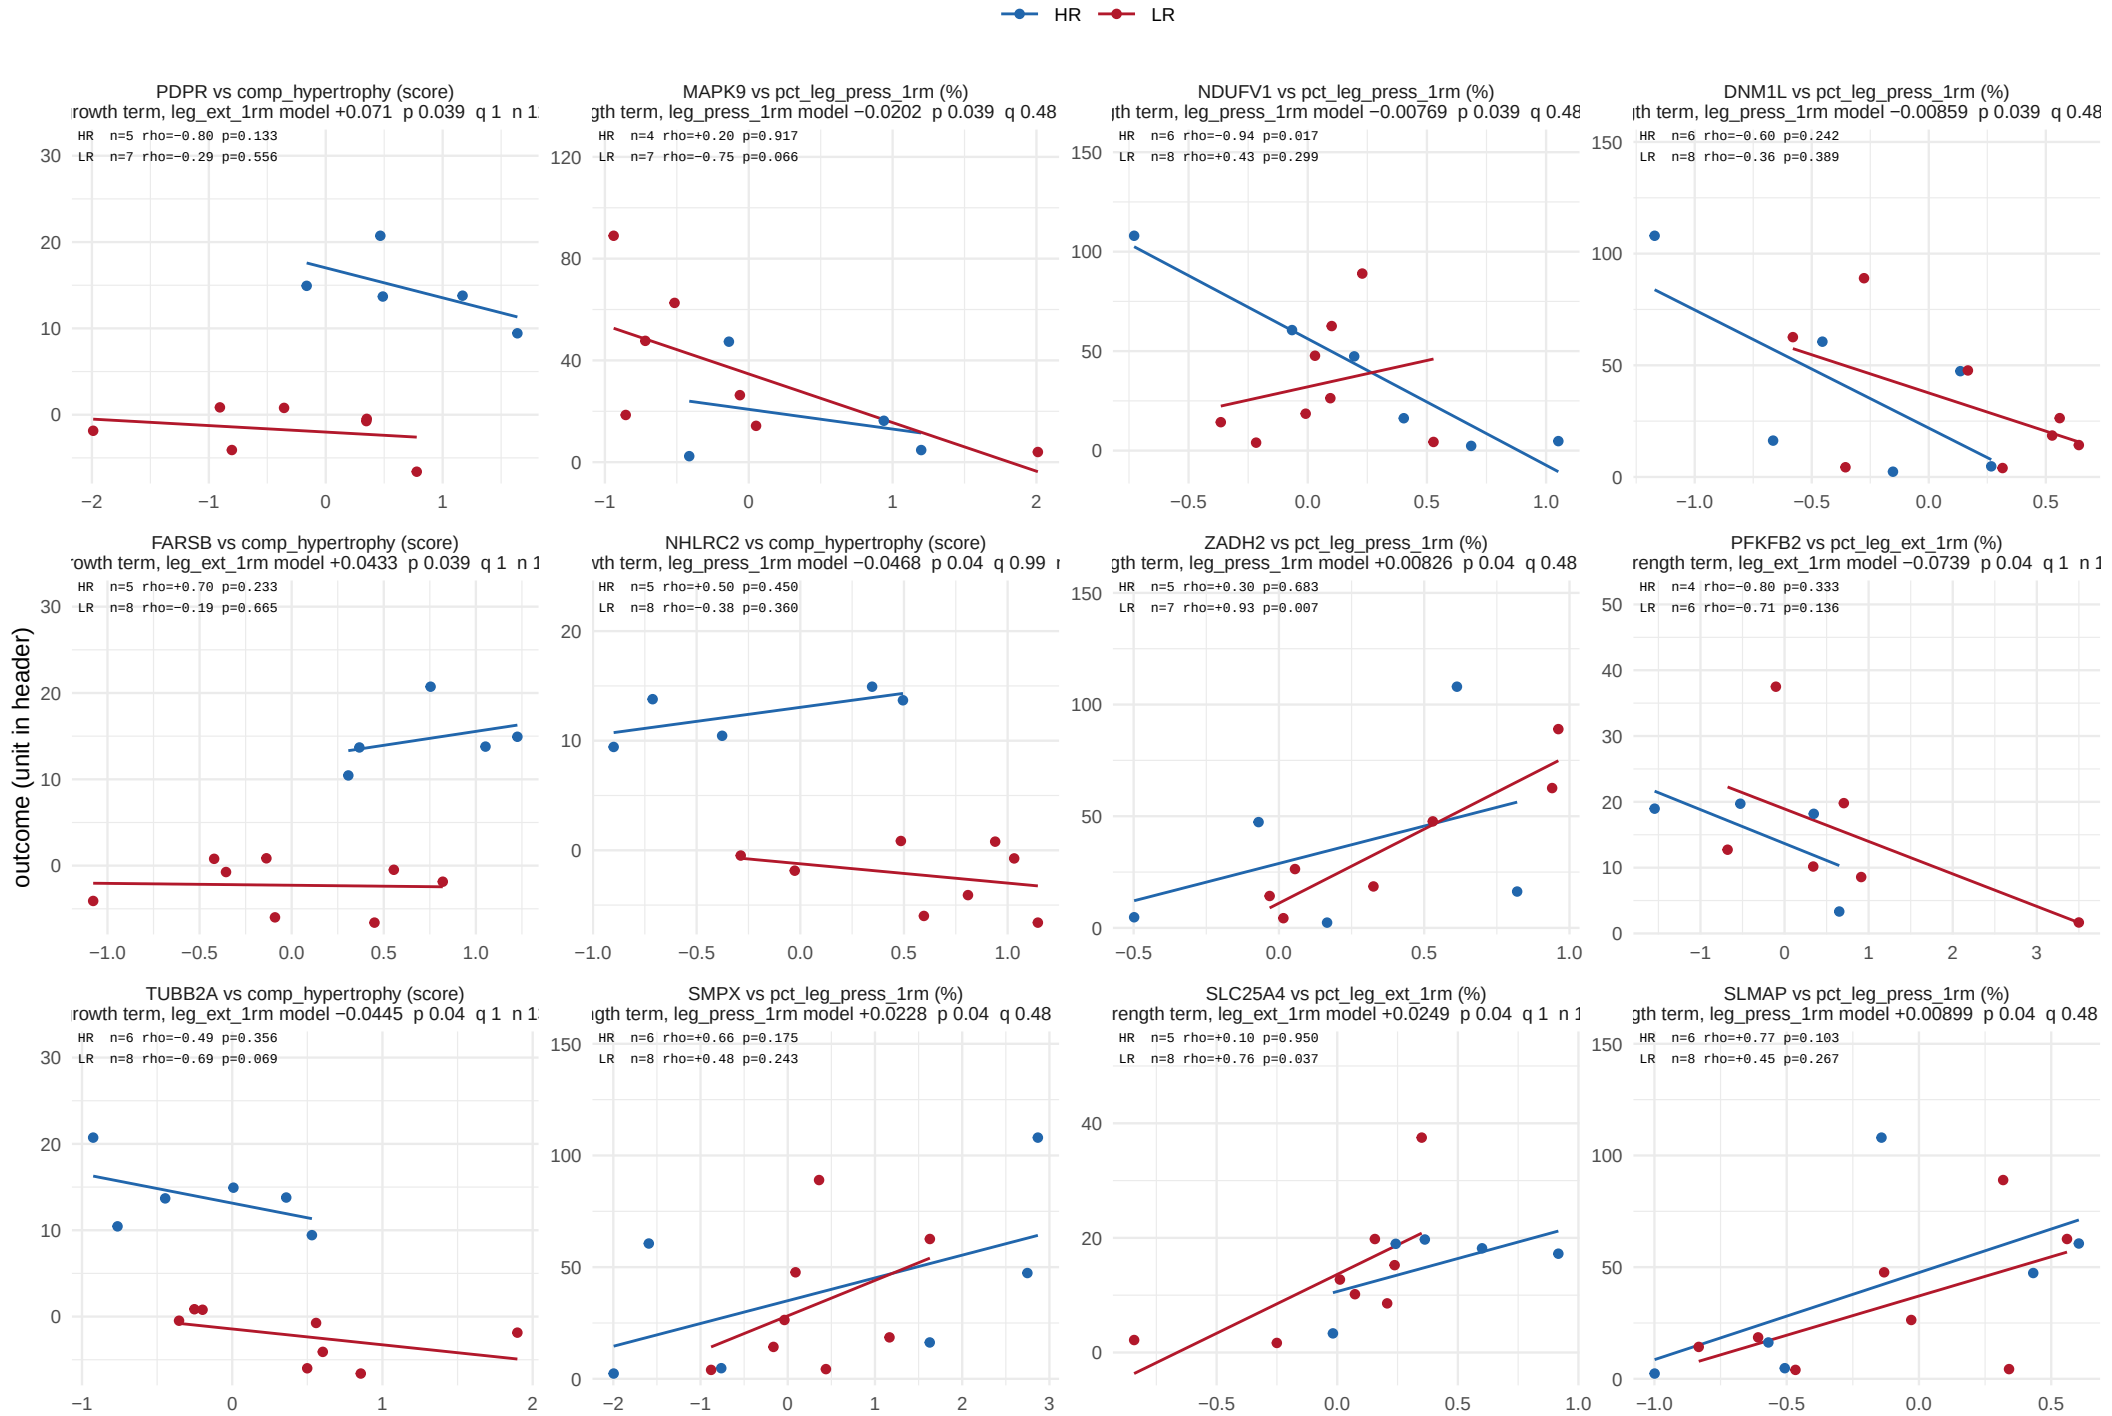

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, training window


260 of 5676 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 18 of 22.

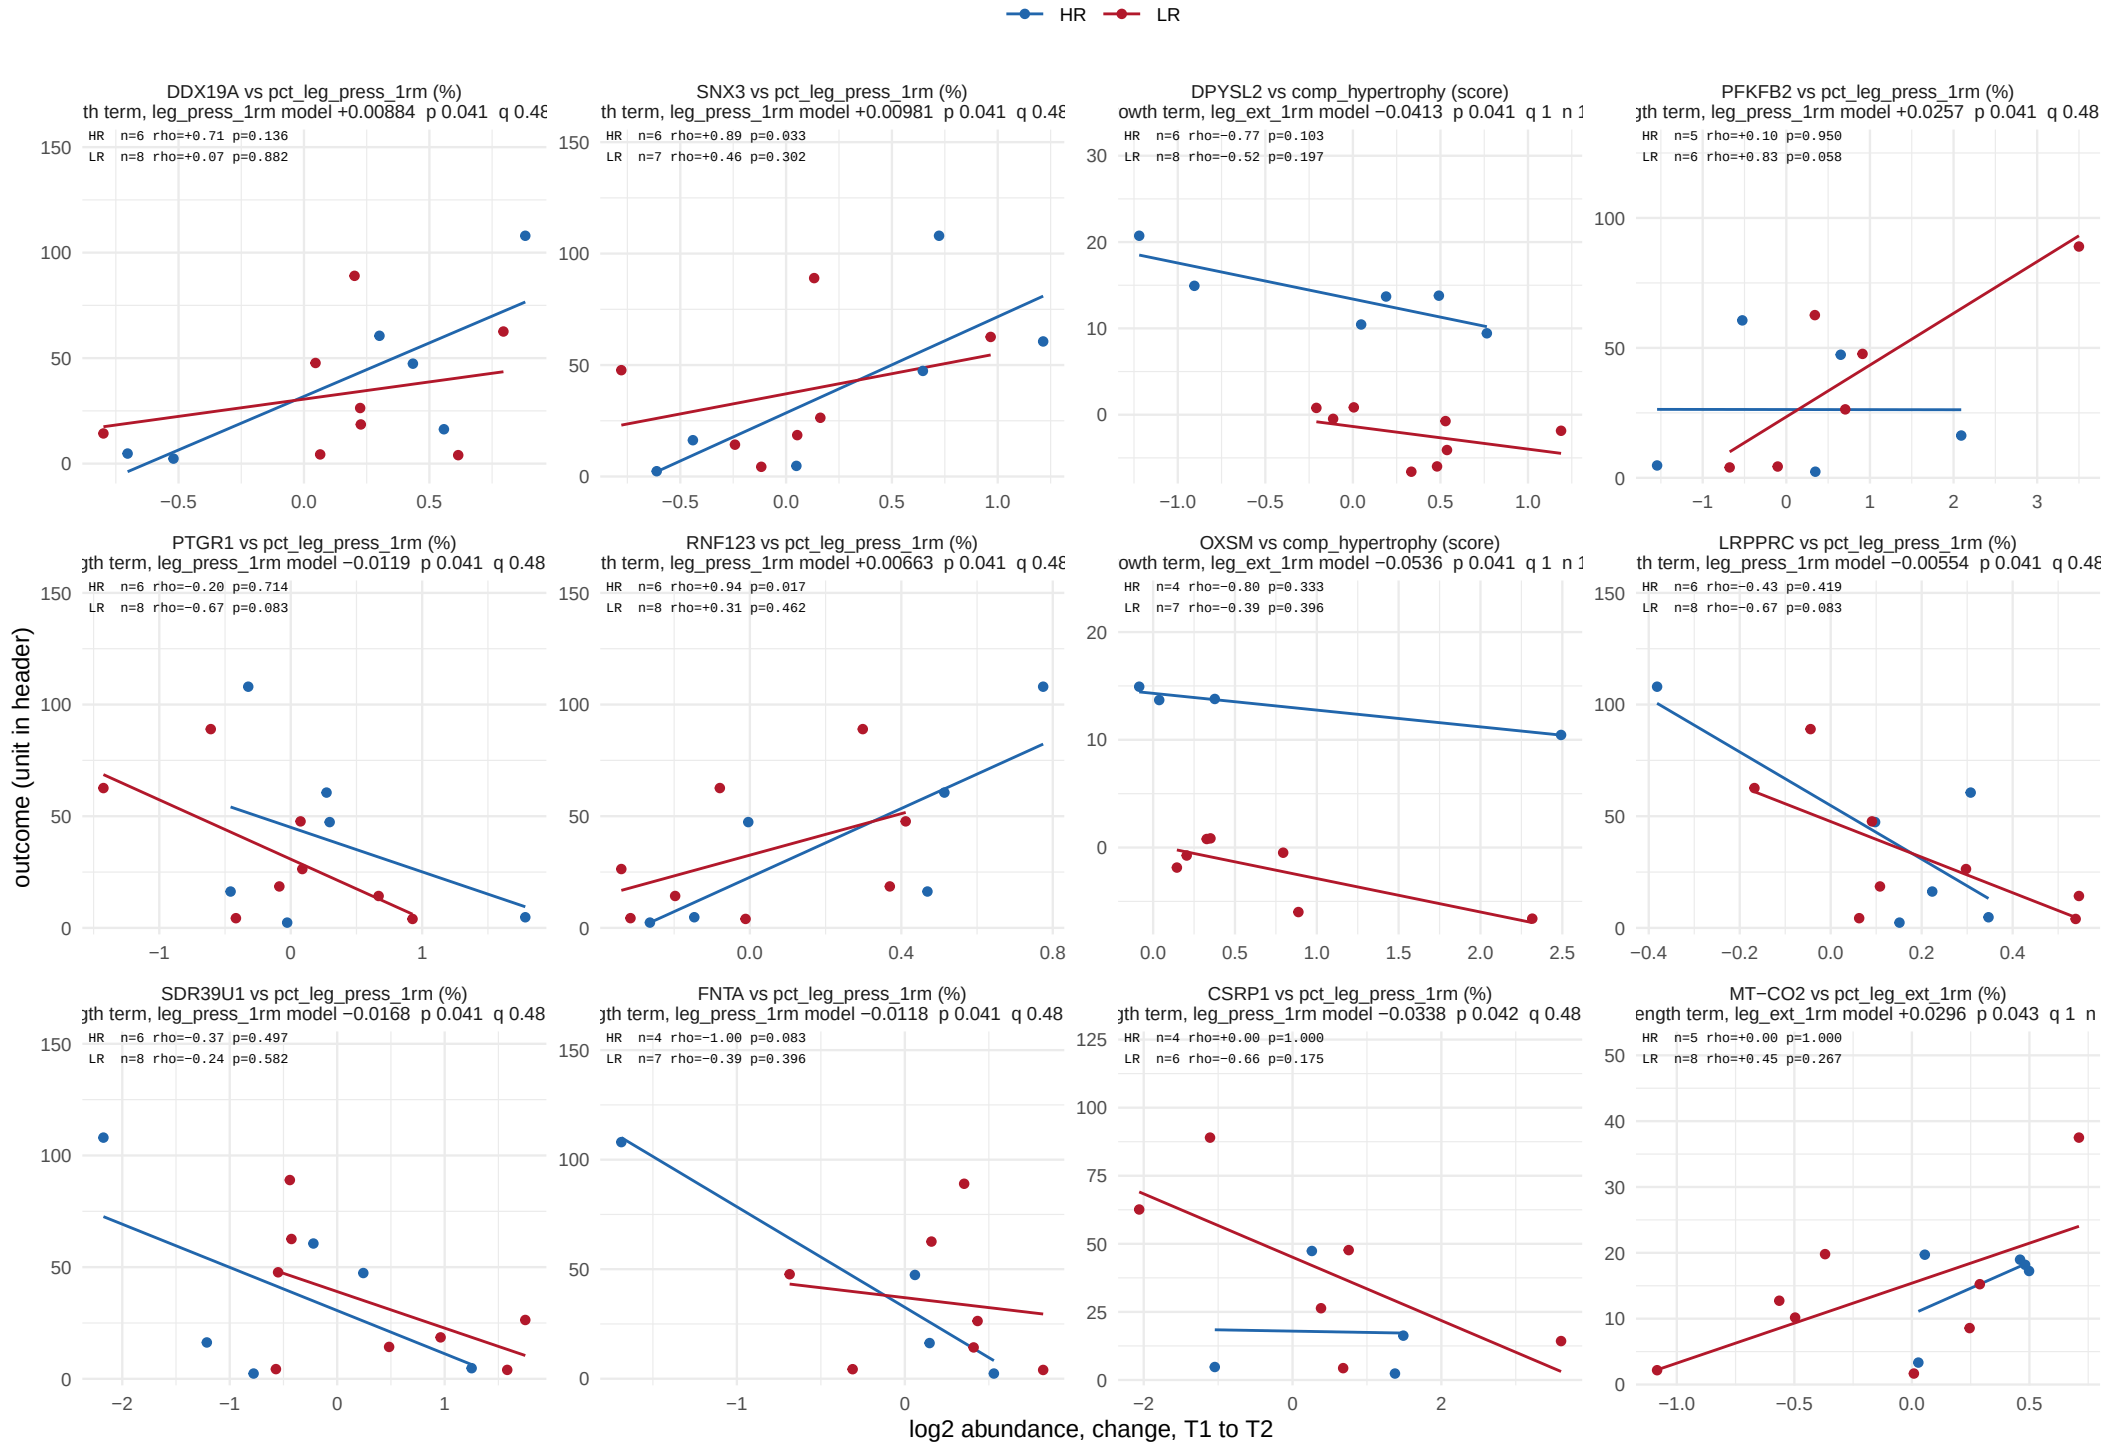

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, training window


260 of 5676 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 19 of 22.

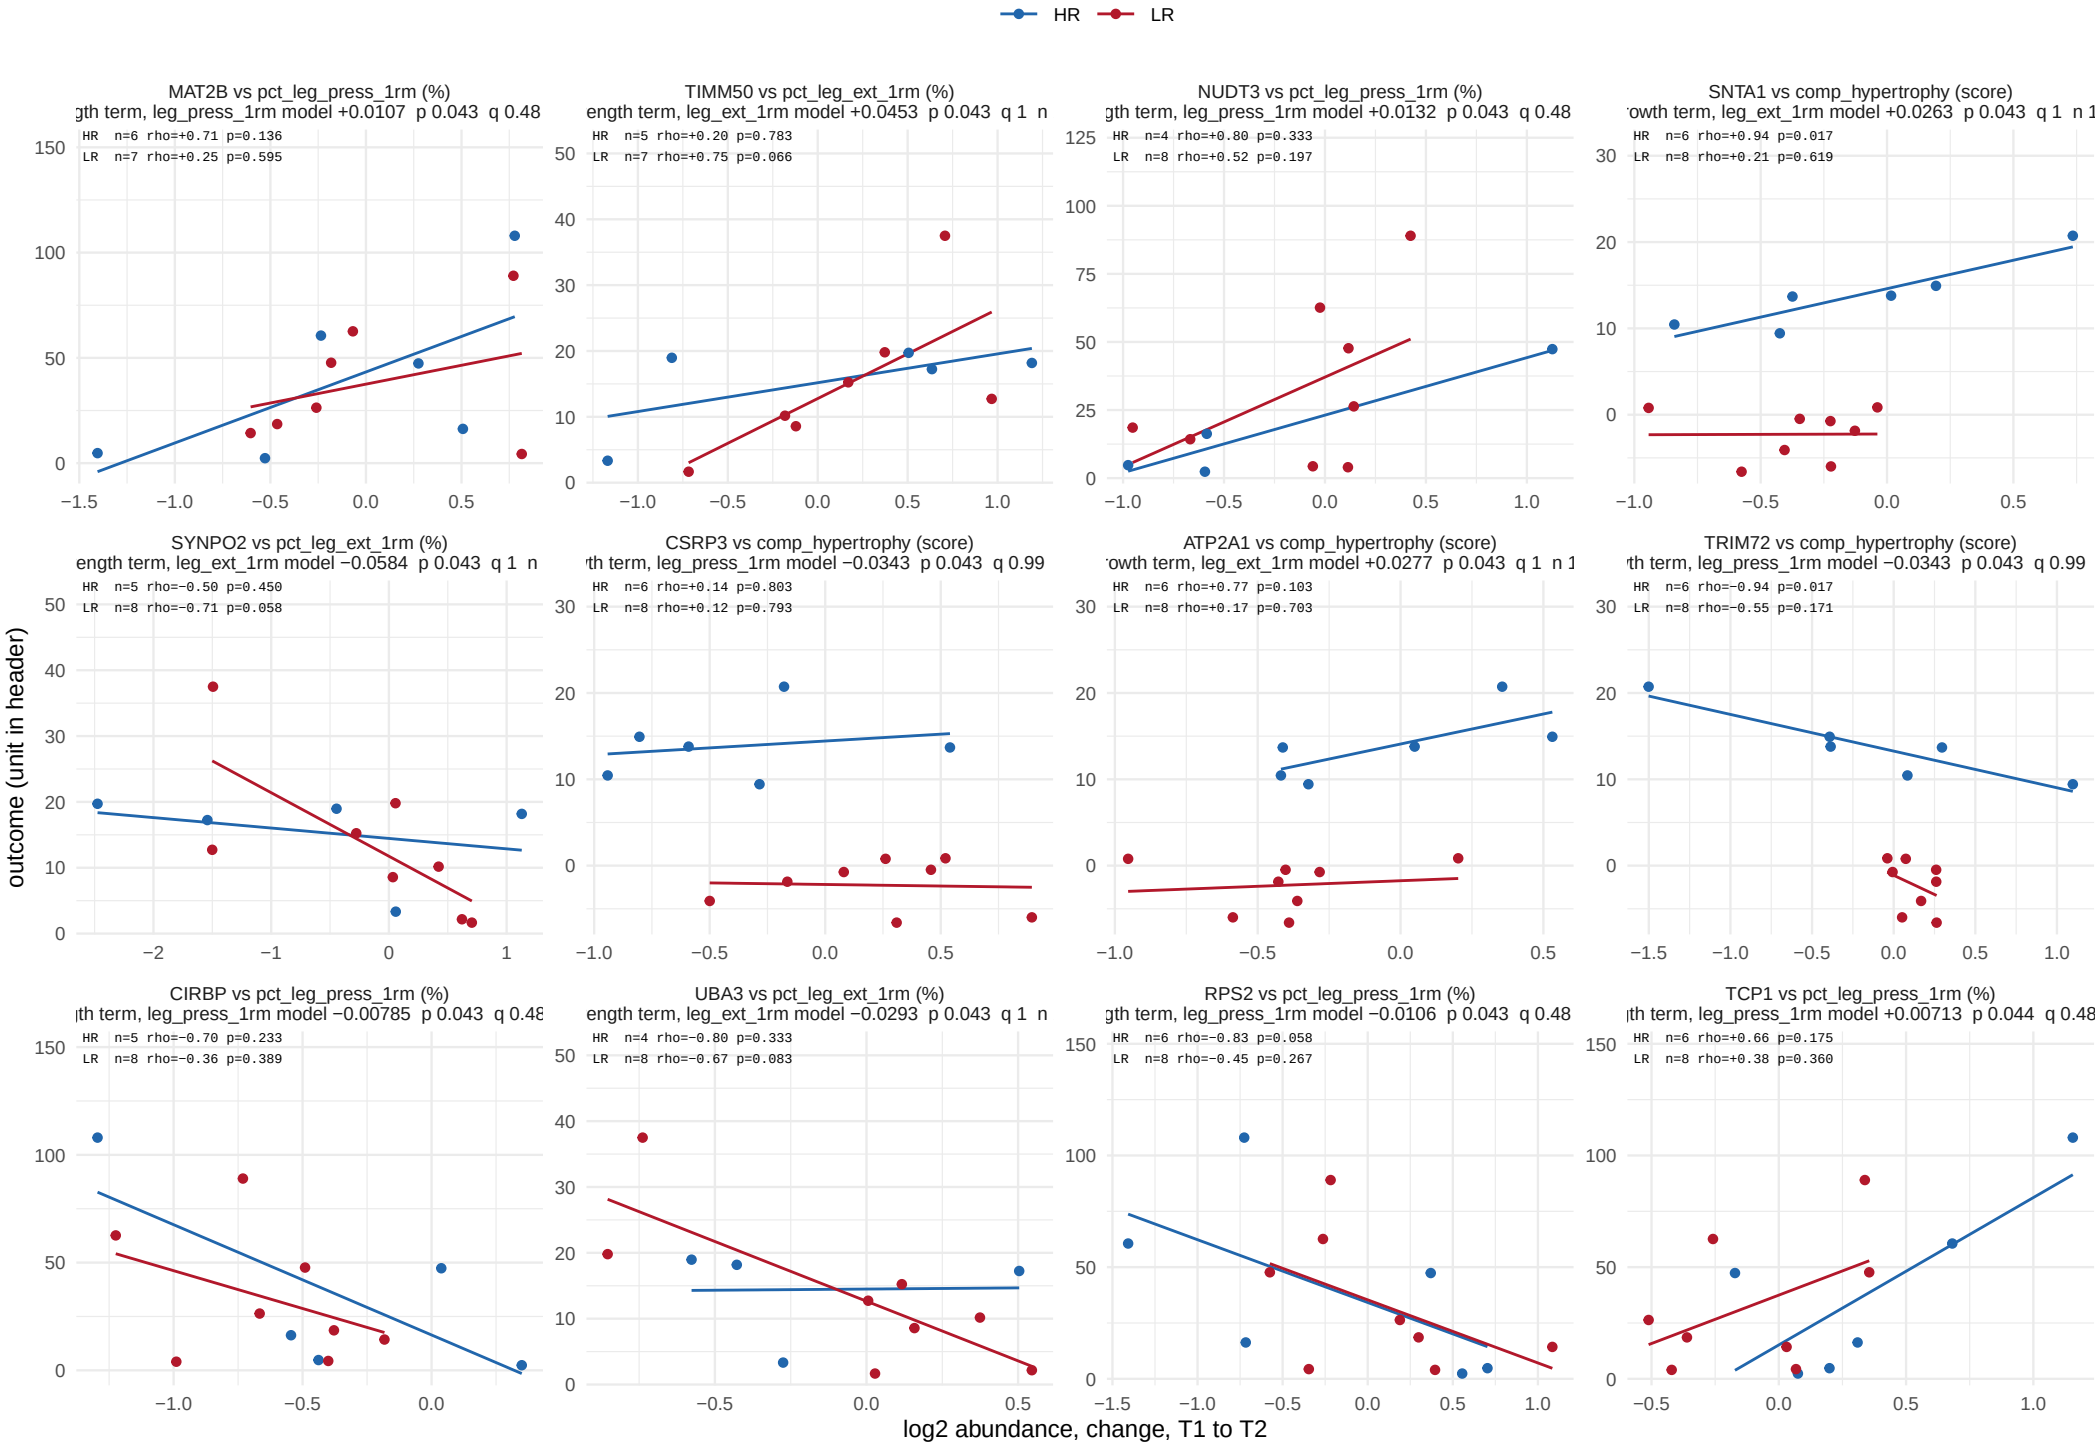

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, training window


260 of 5676 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 20 of 22.

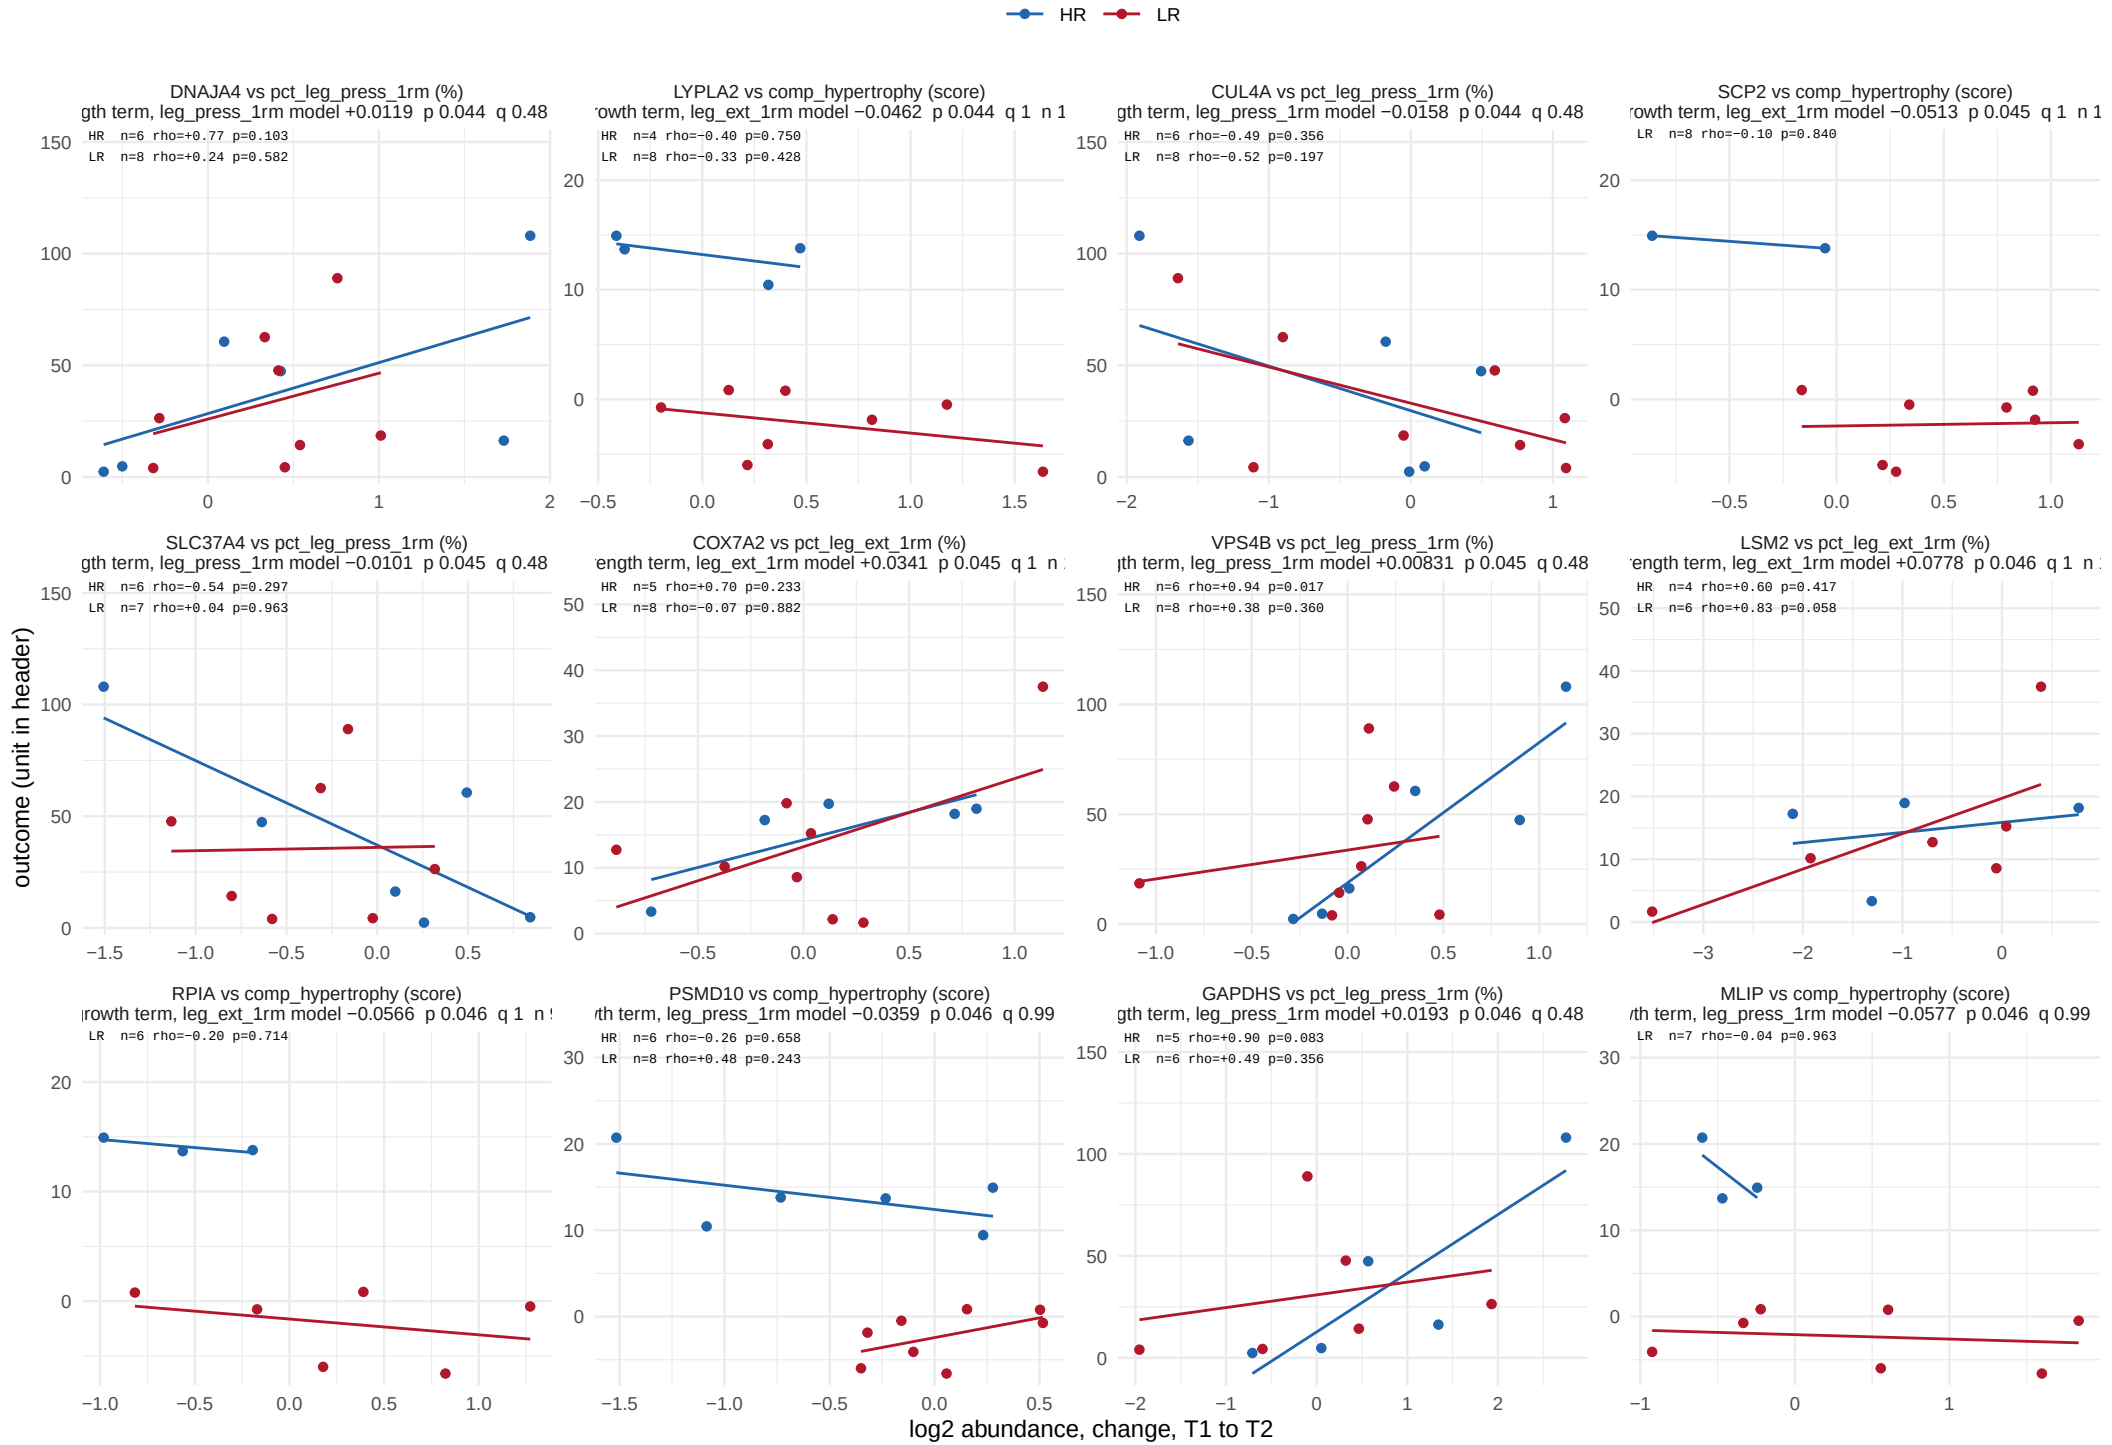

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, training window


260 of 5676 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 21 of 22.

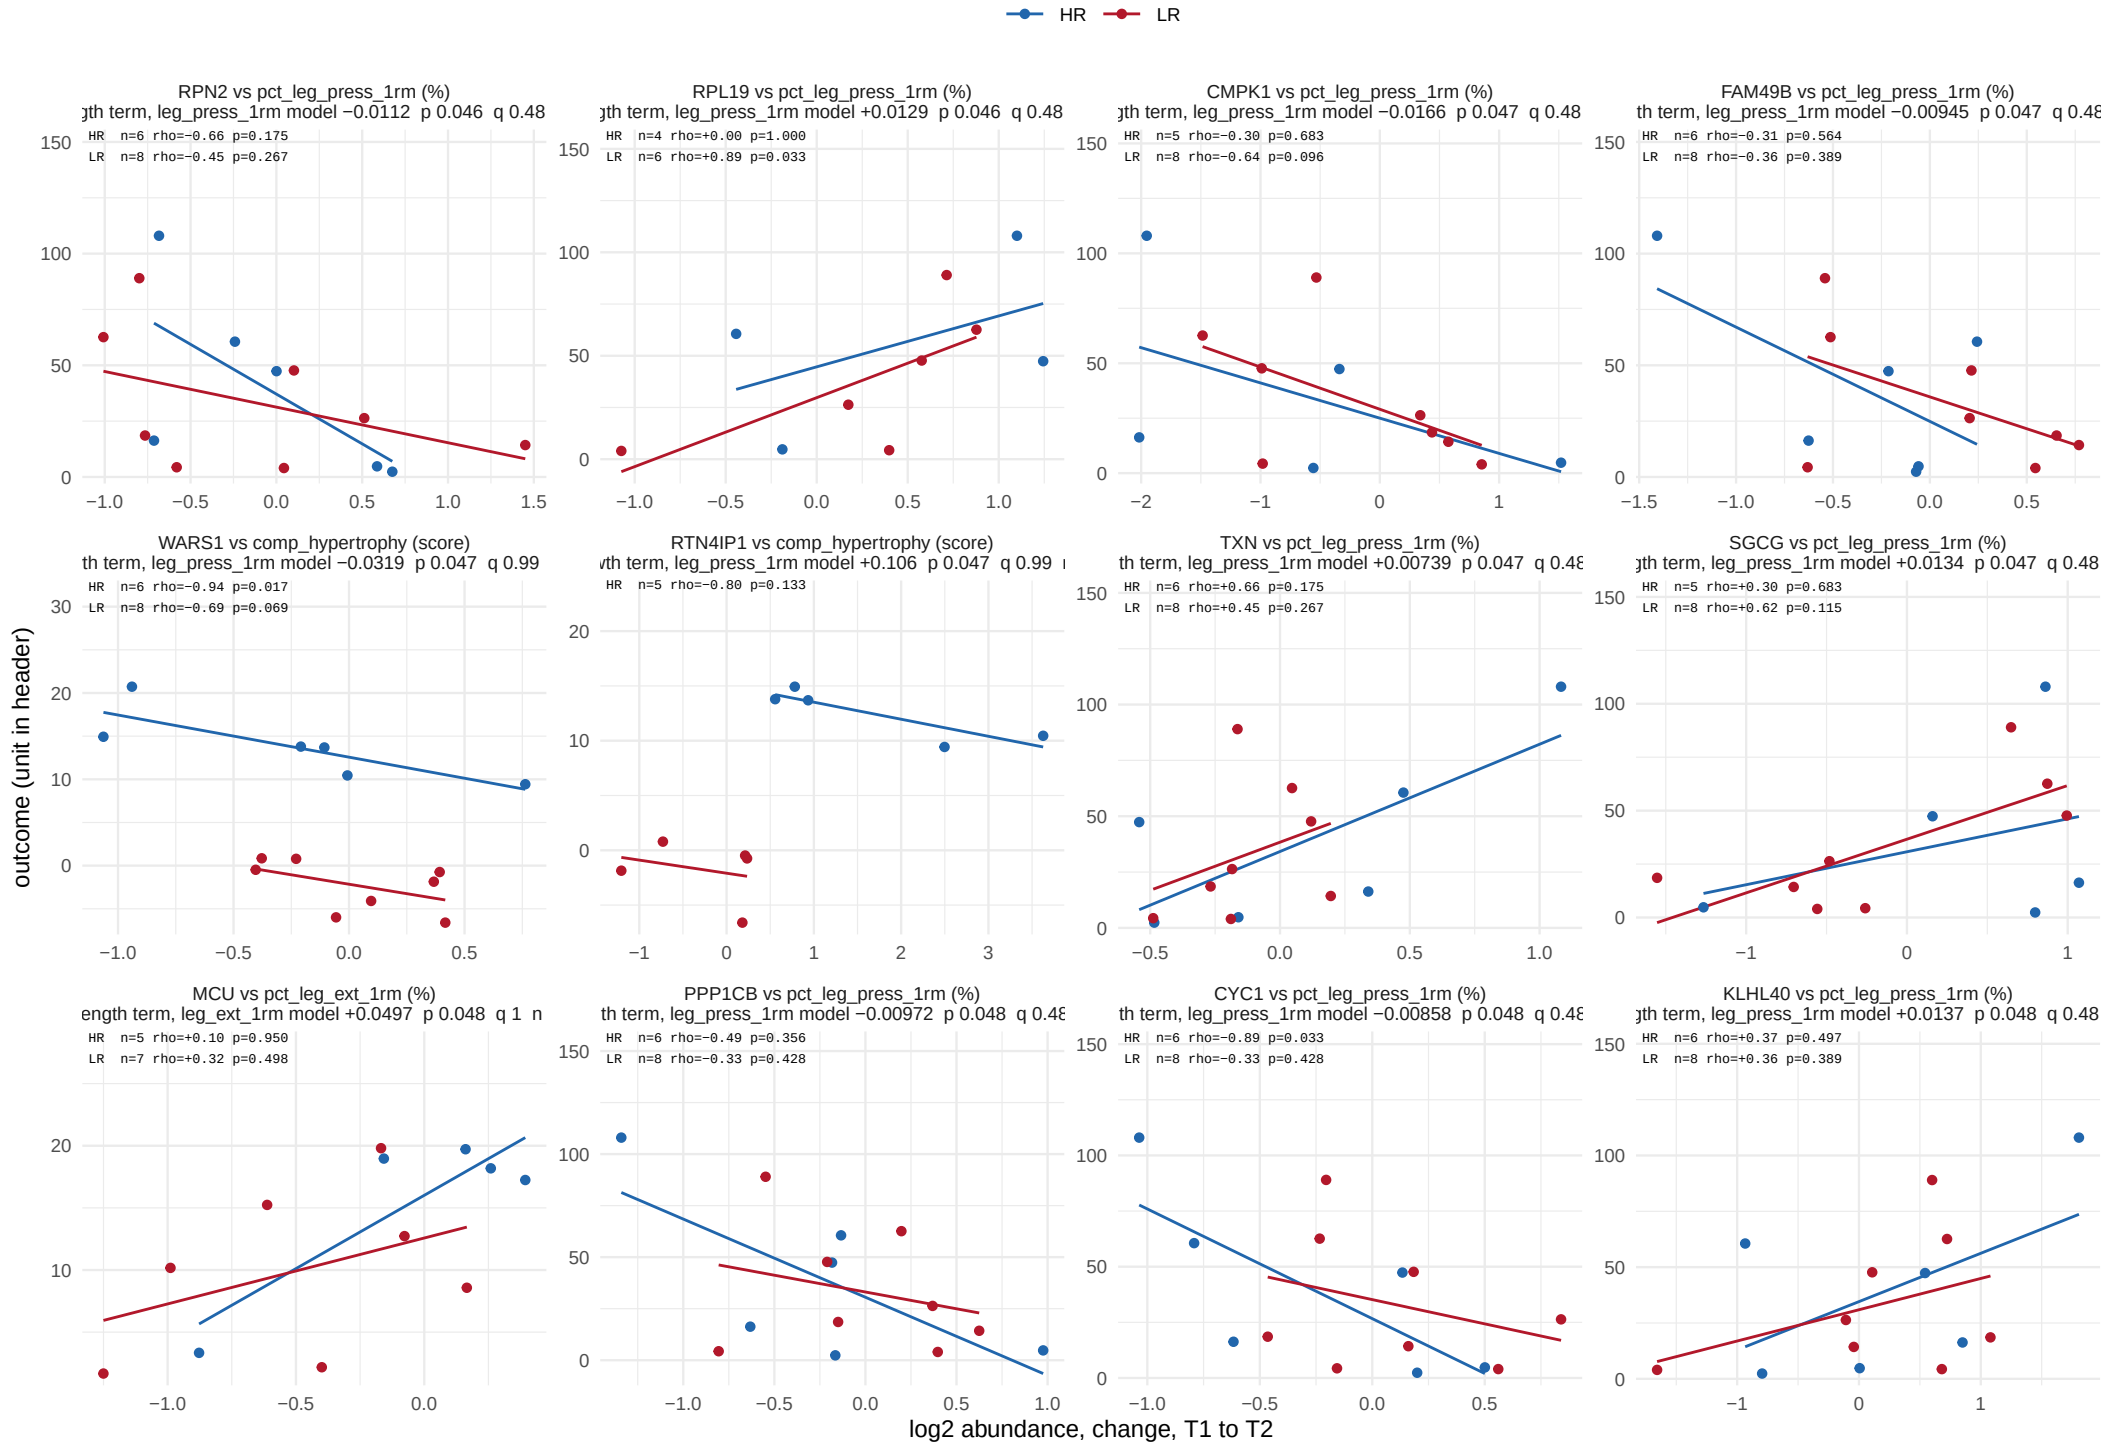

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, training window


260 of 5676 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 22 of 22.

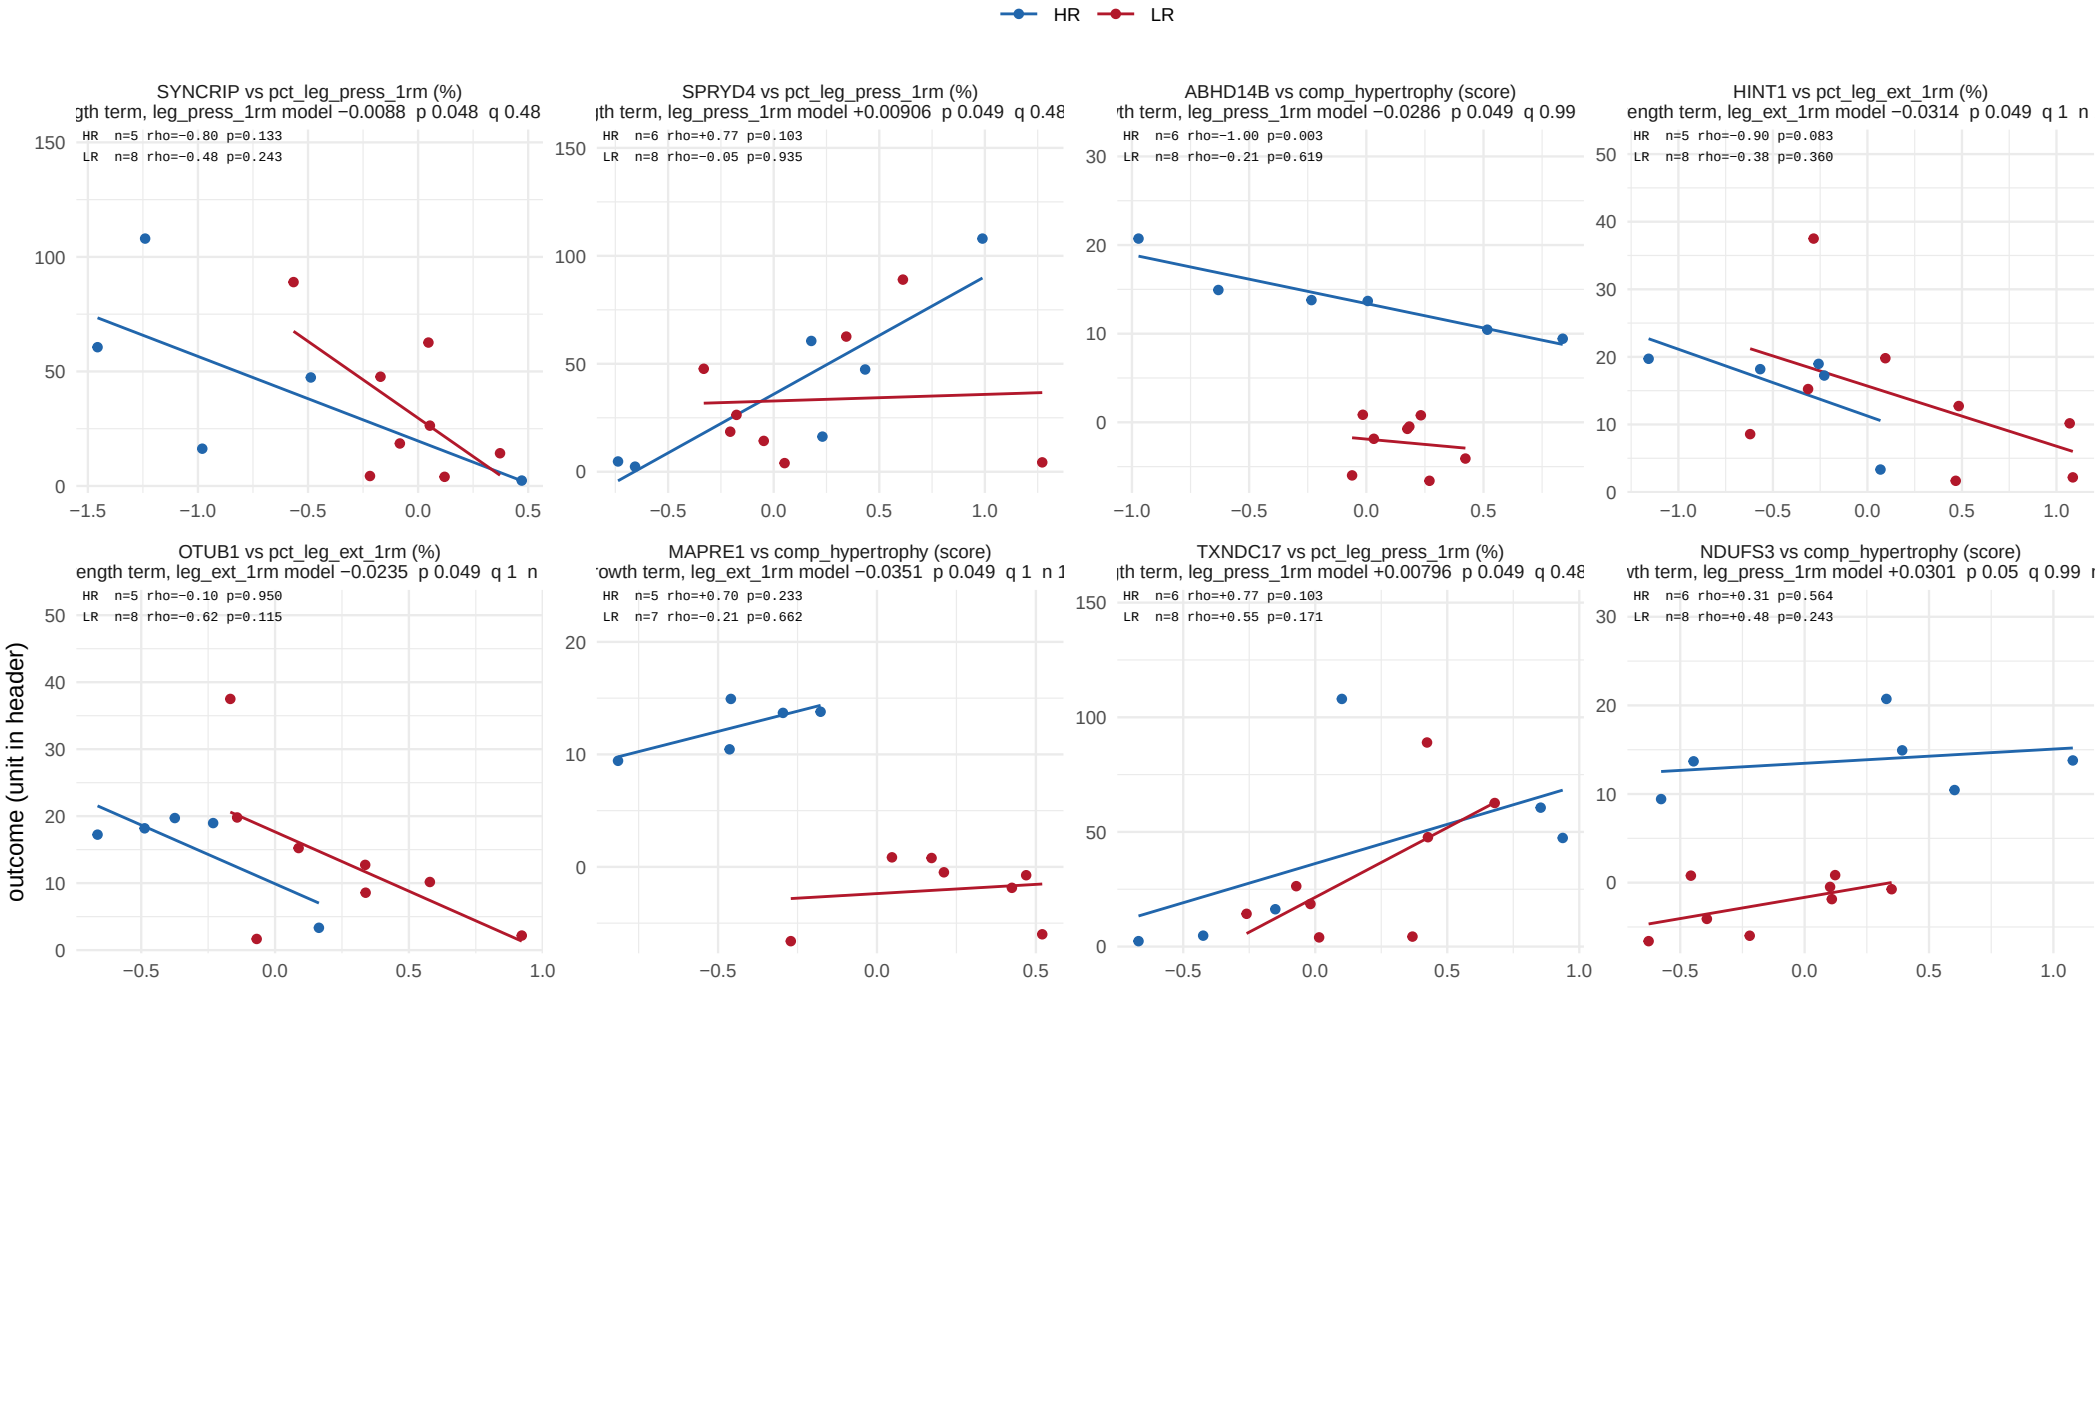

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, baseline window


378 of 6218 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 1 of 32.

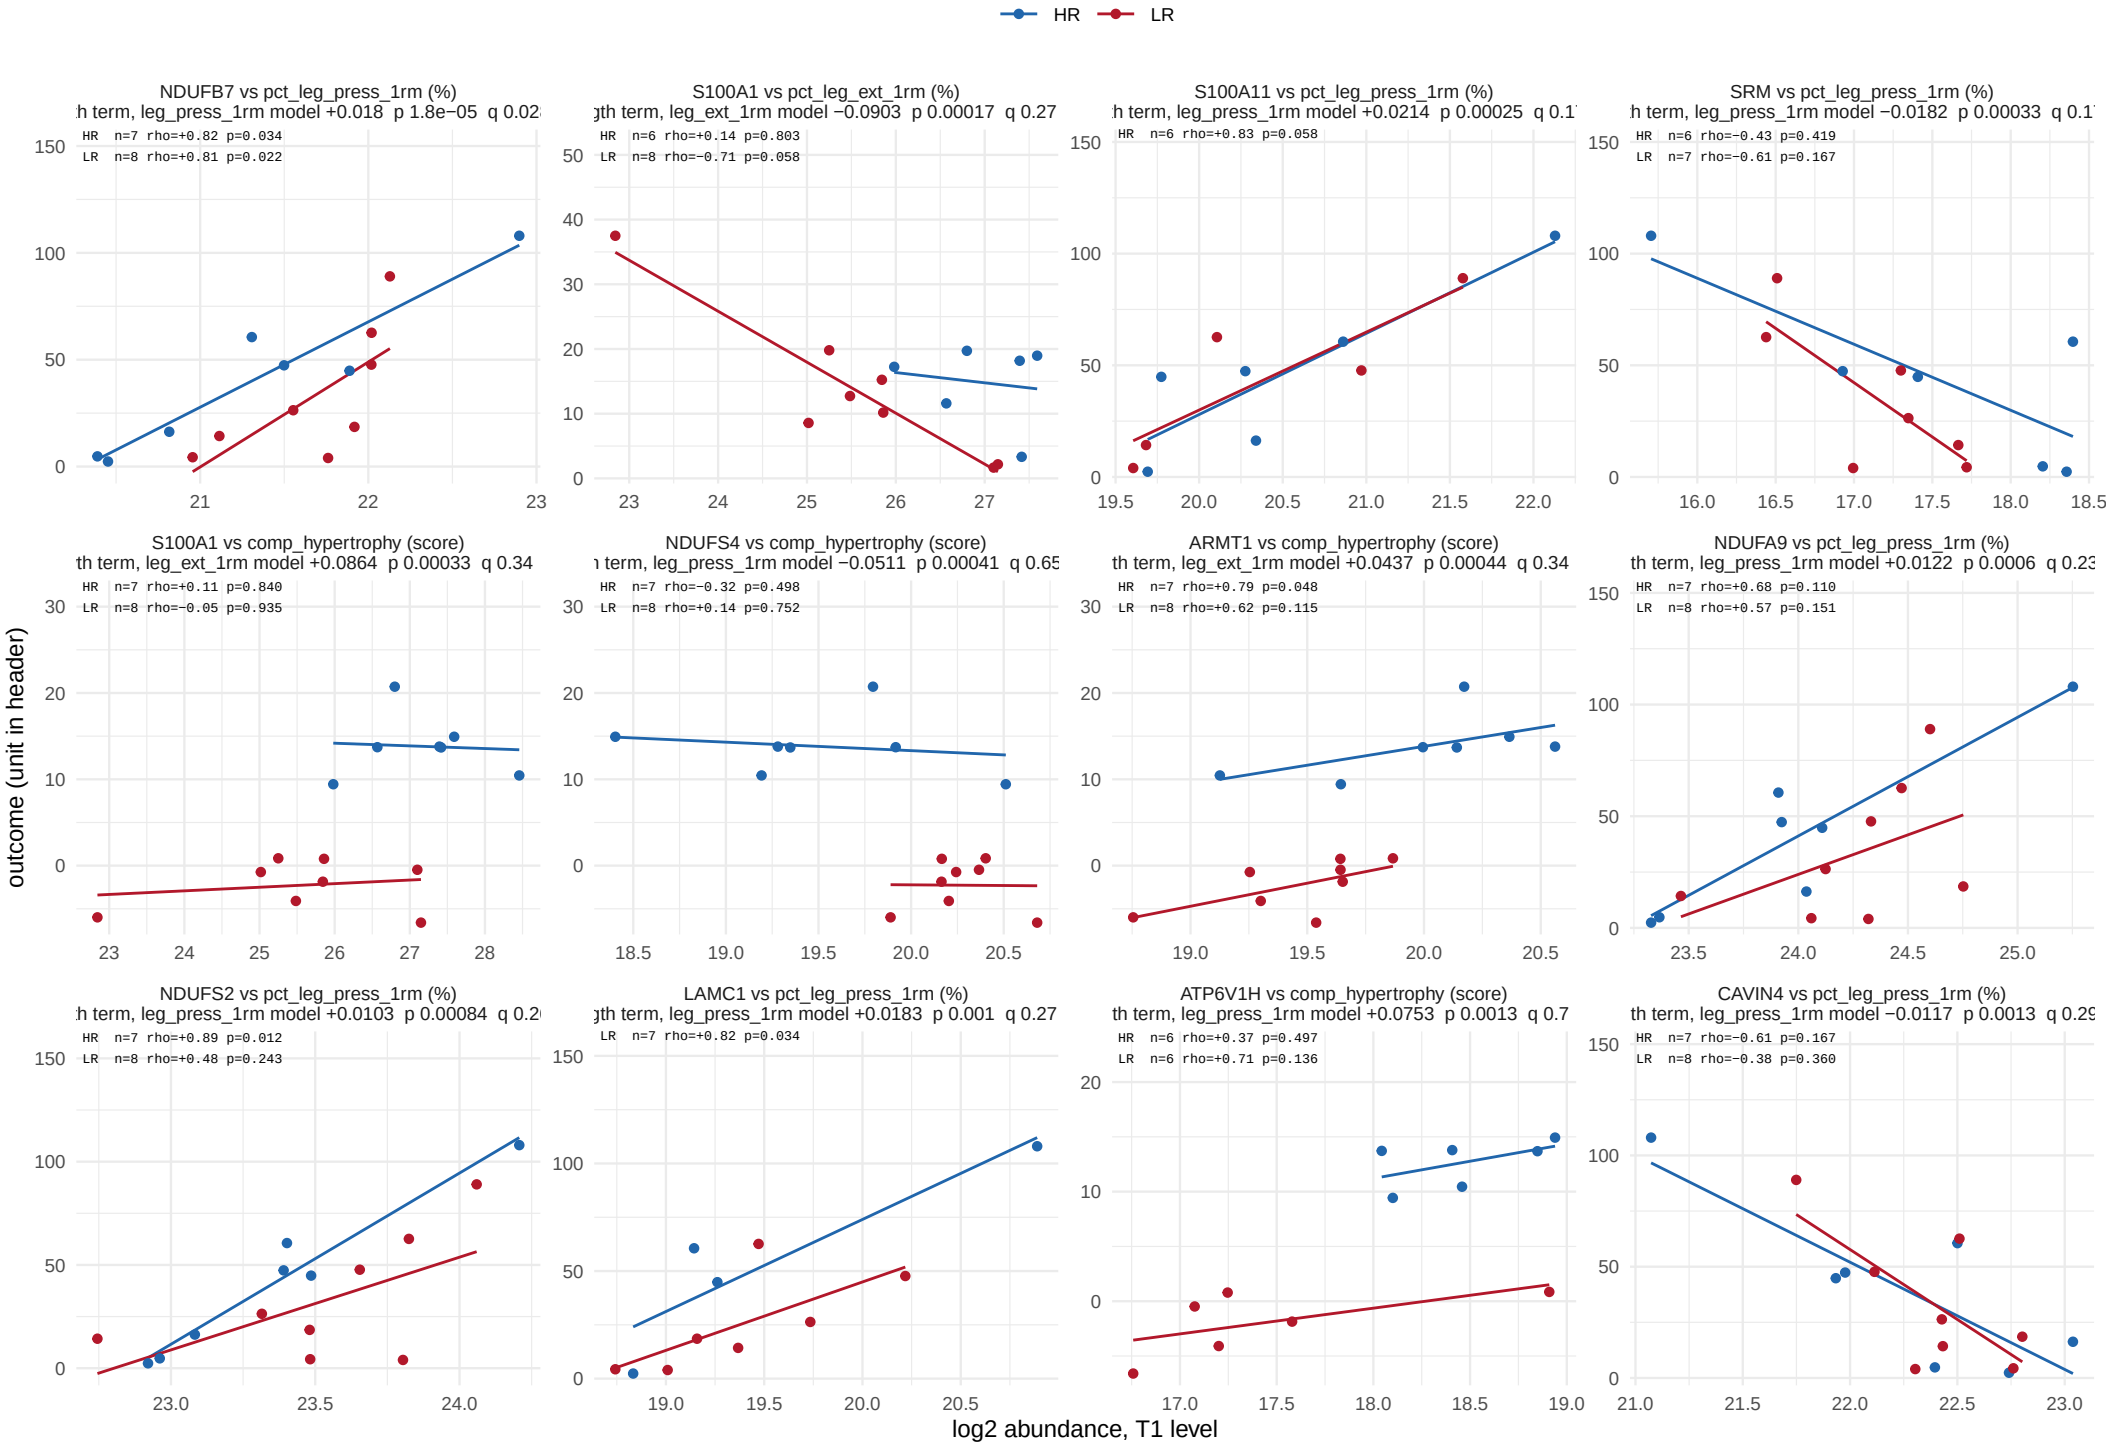

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, baseline window


378 of 6218 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 2 of 32.

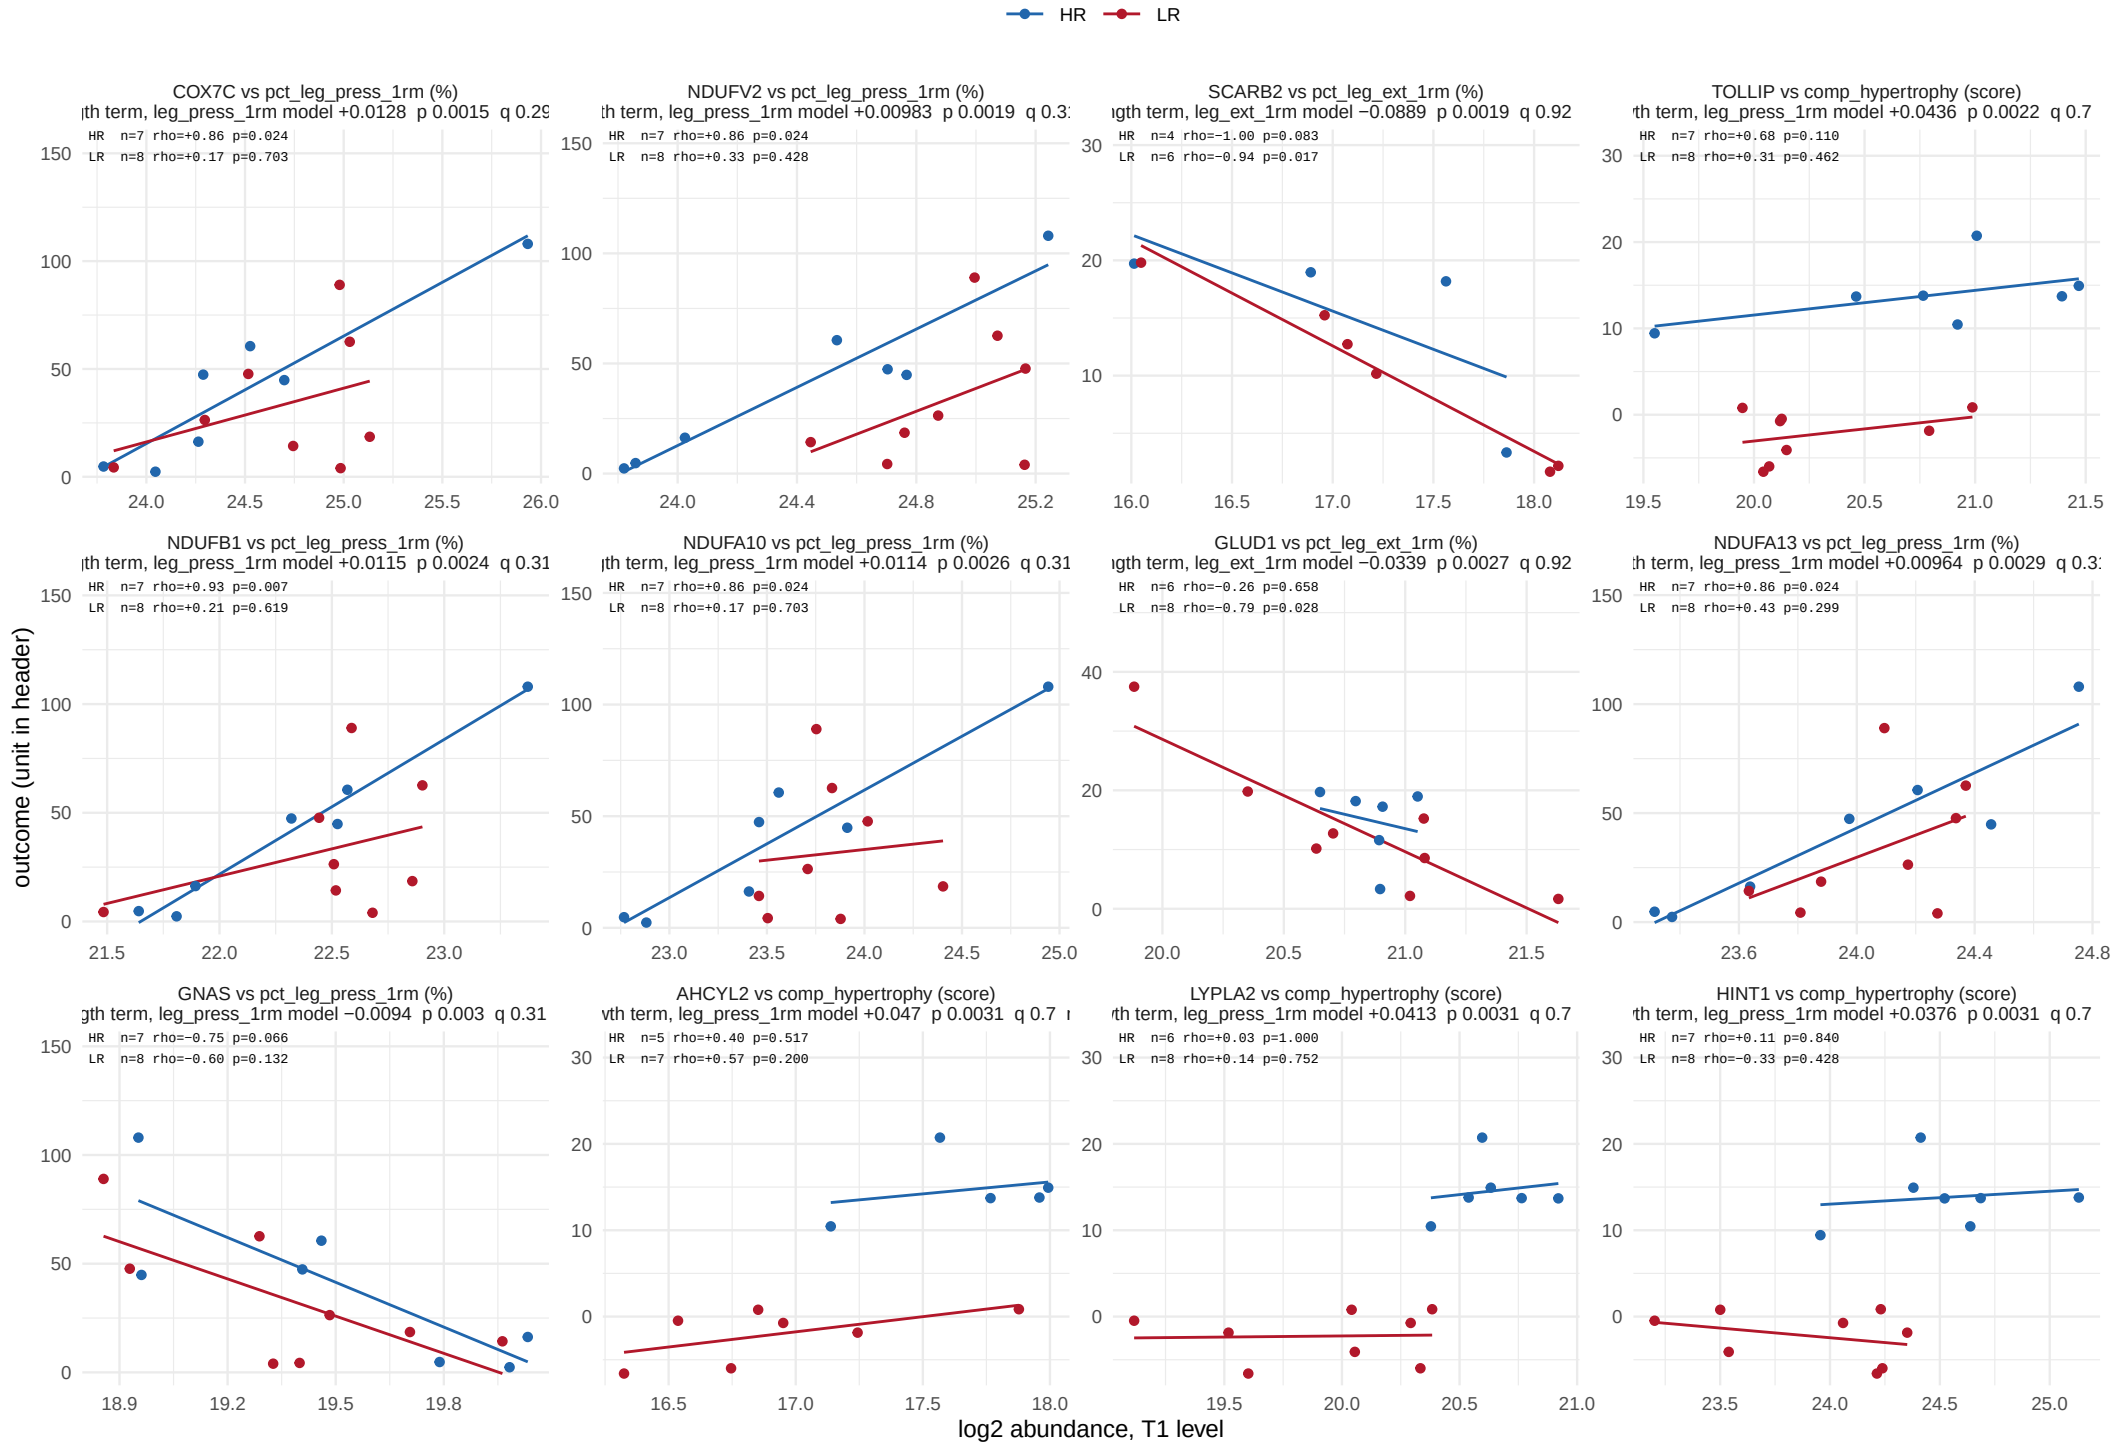

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, baseline window


378 of 6218 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 3 of 32.

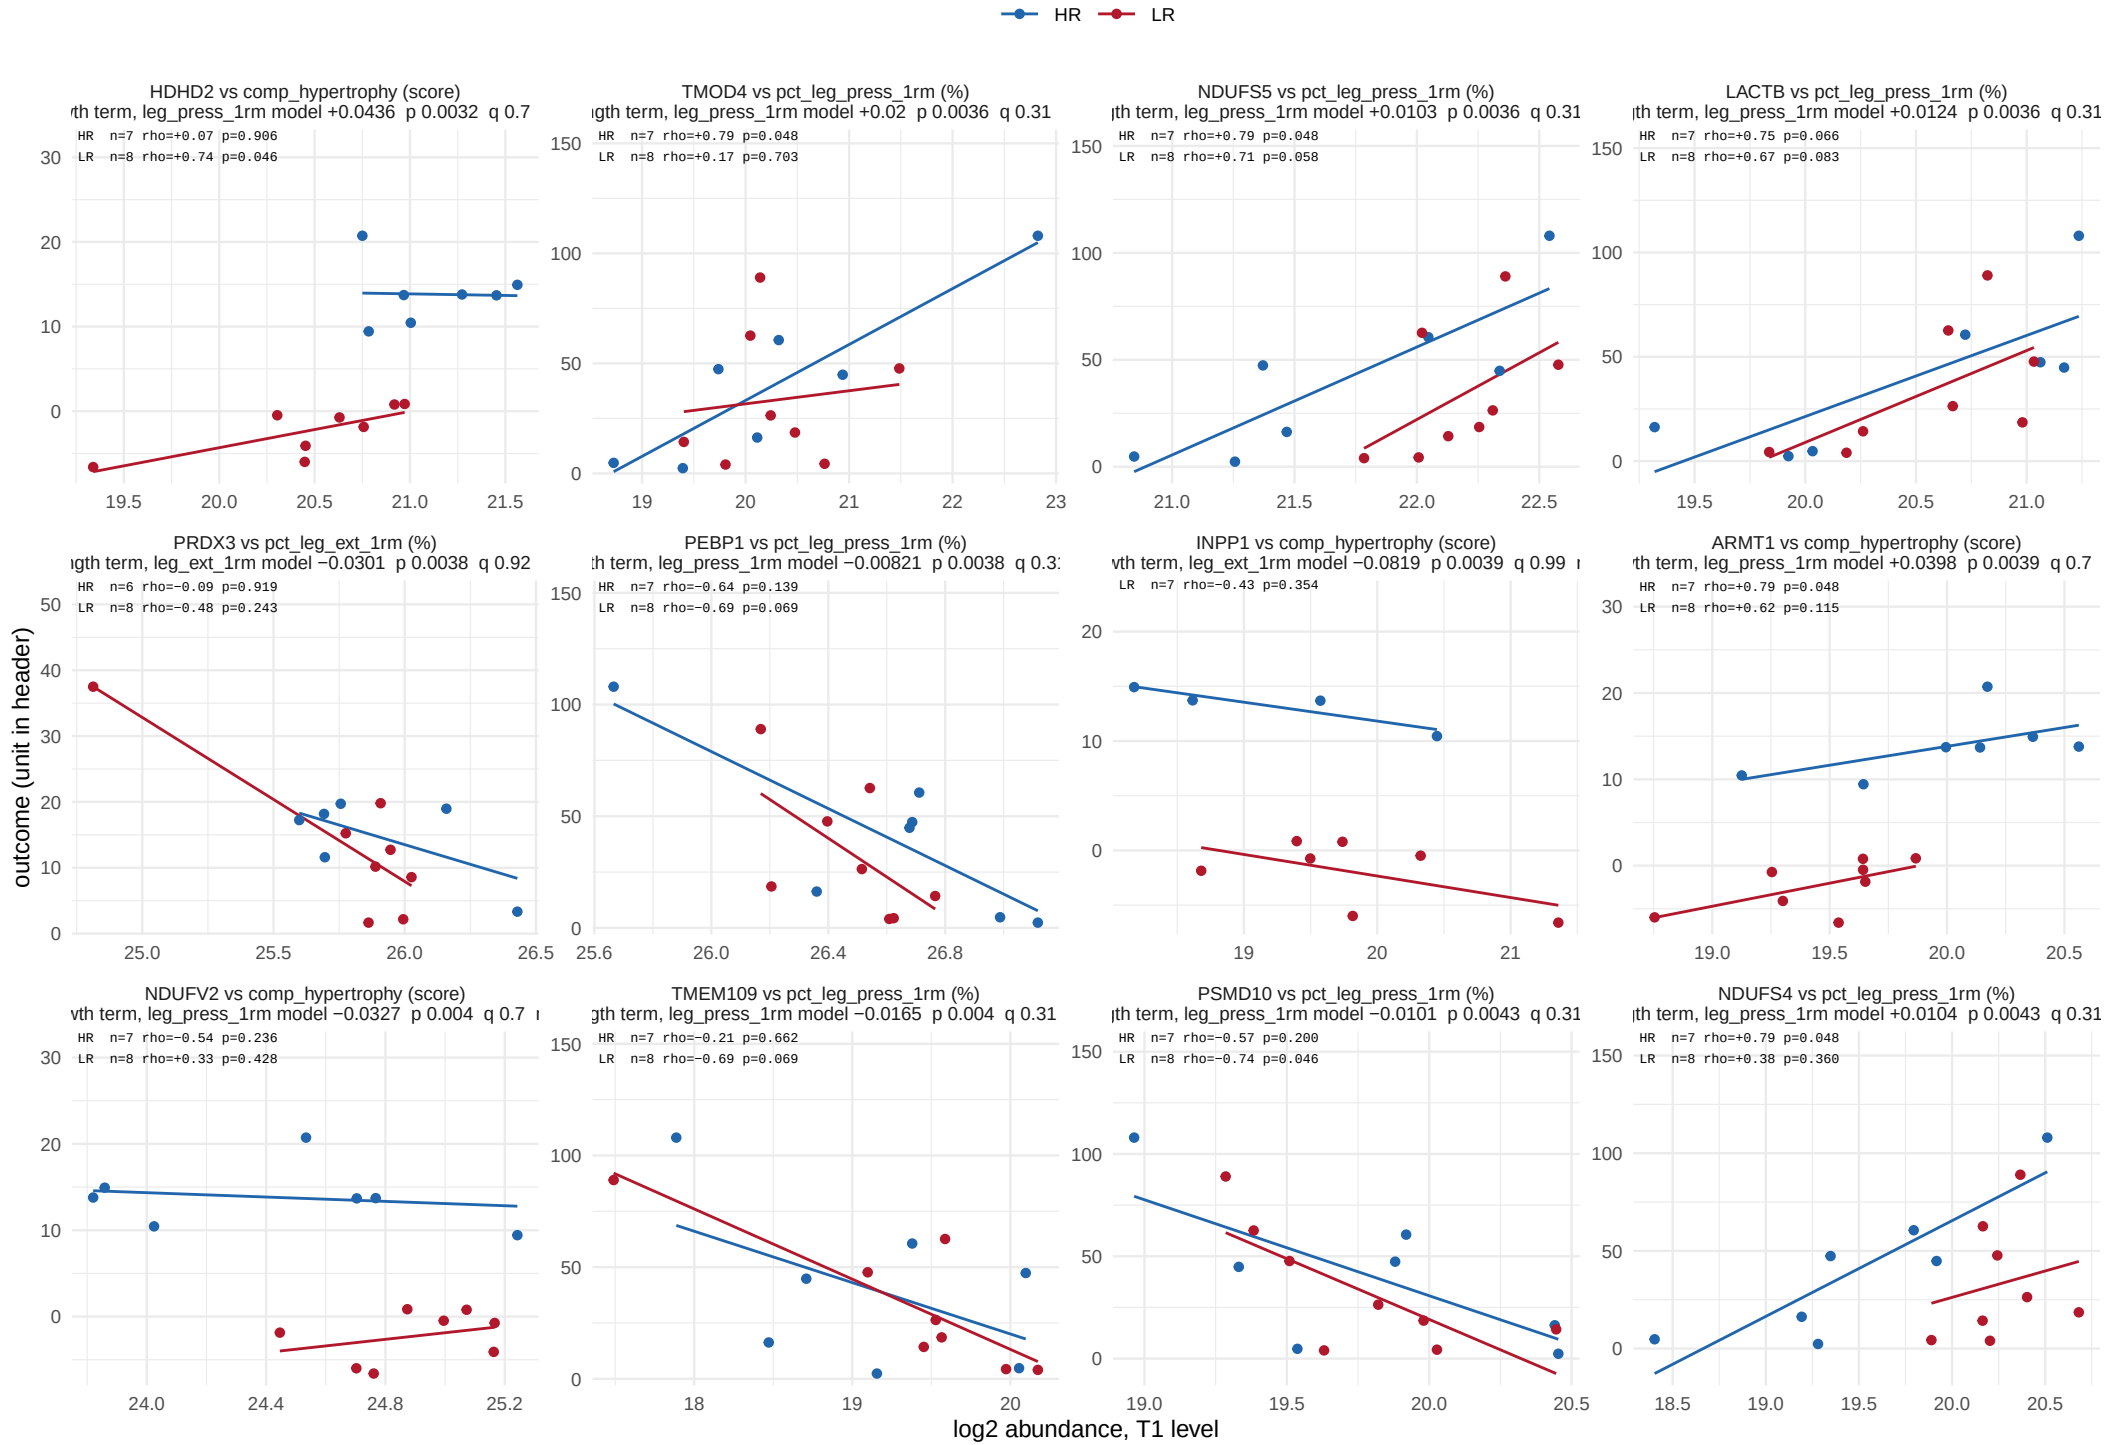

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.


Two predictor, baseline window

378 of 6218 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 4 of 32.

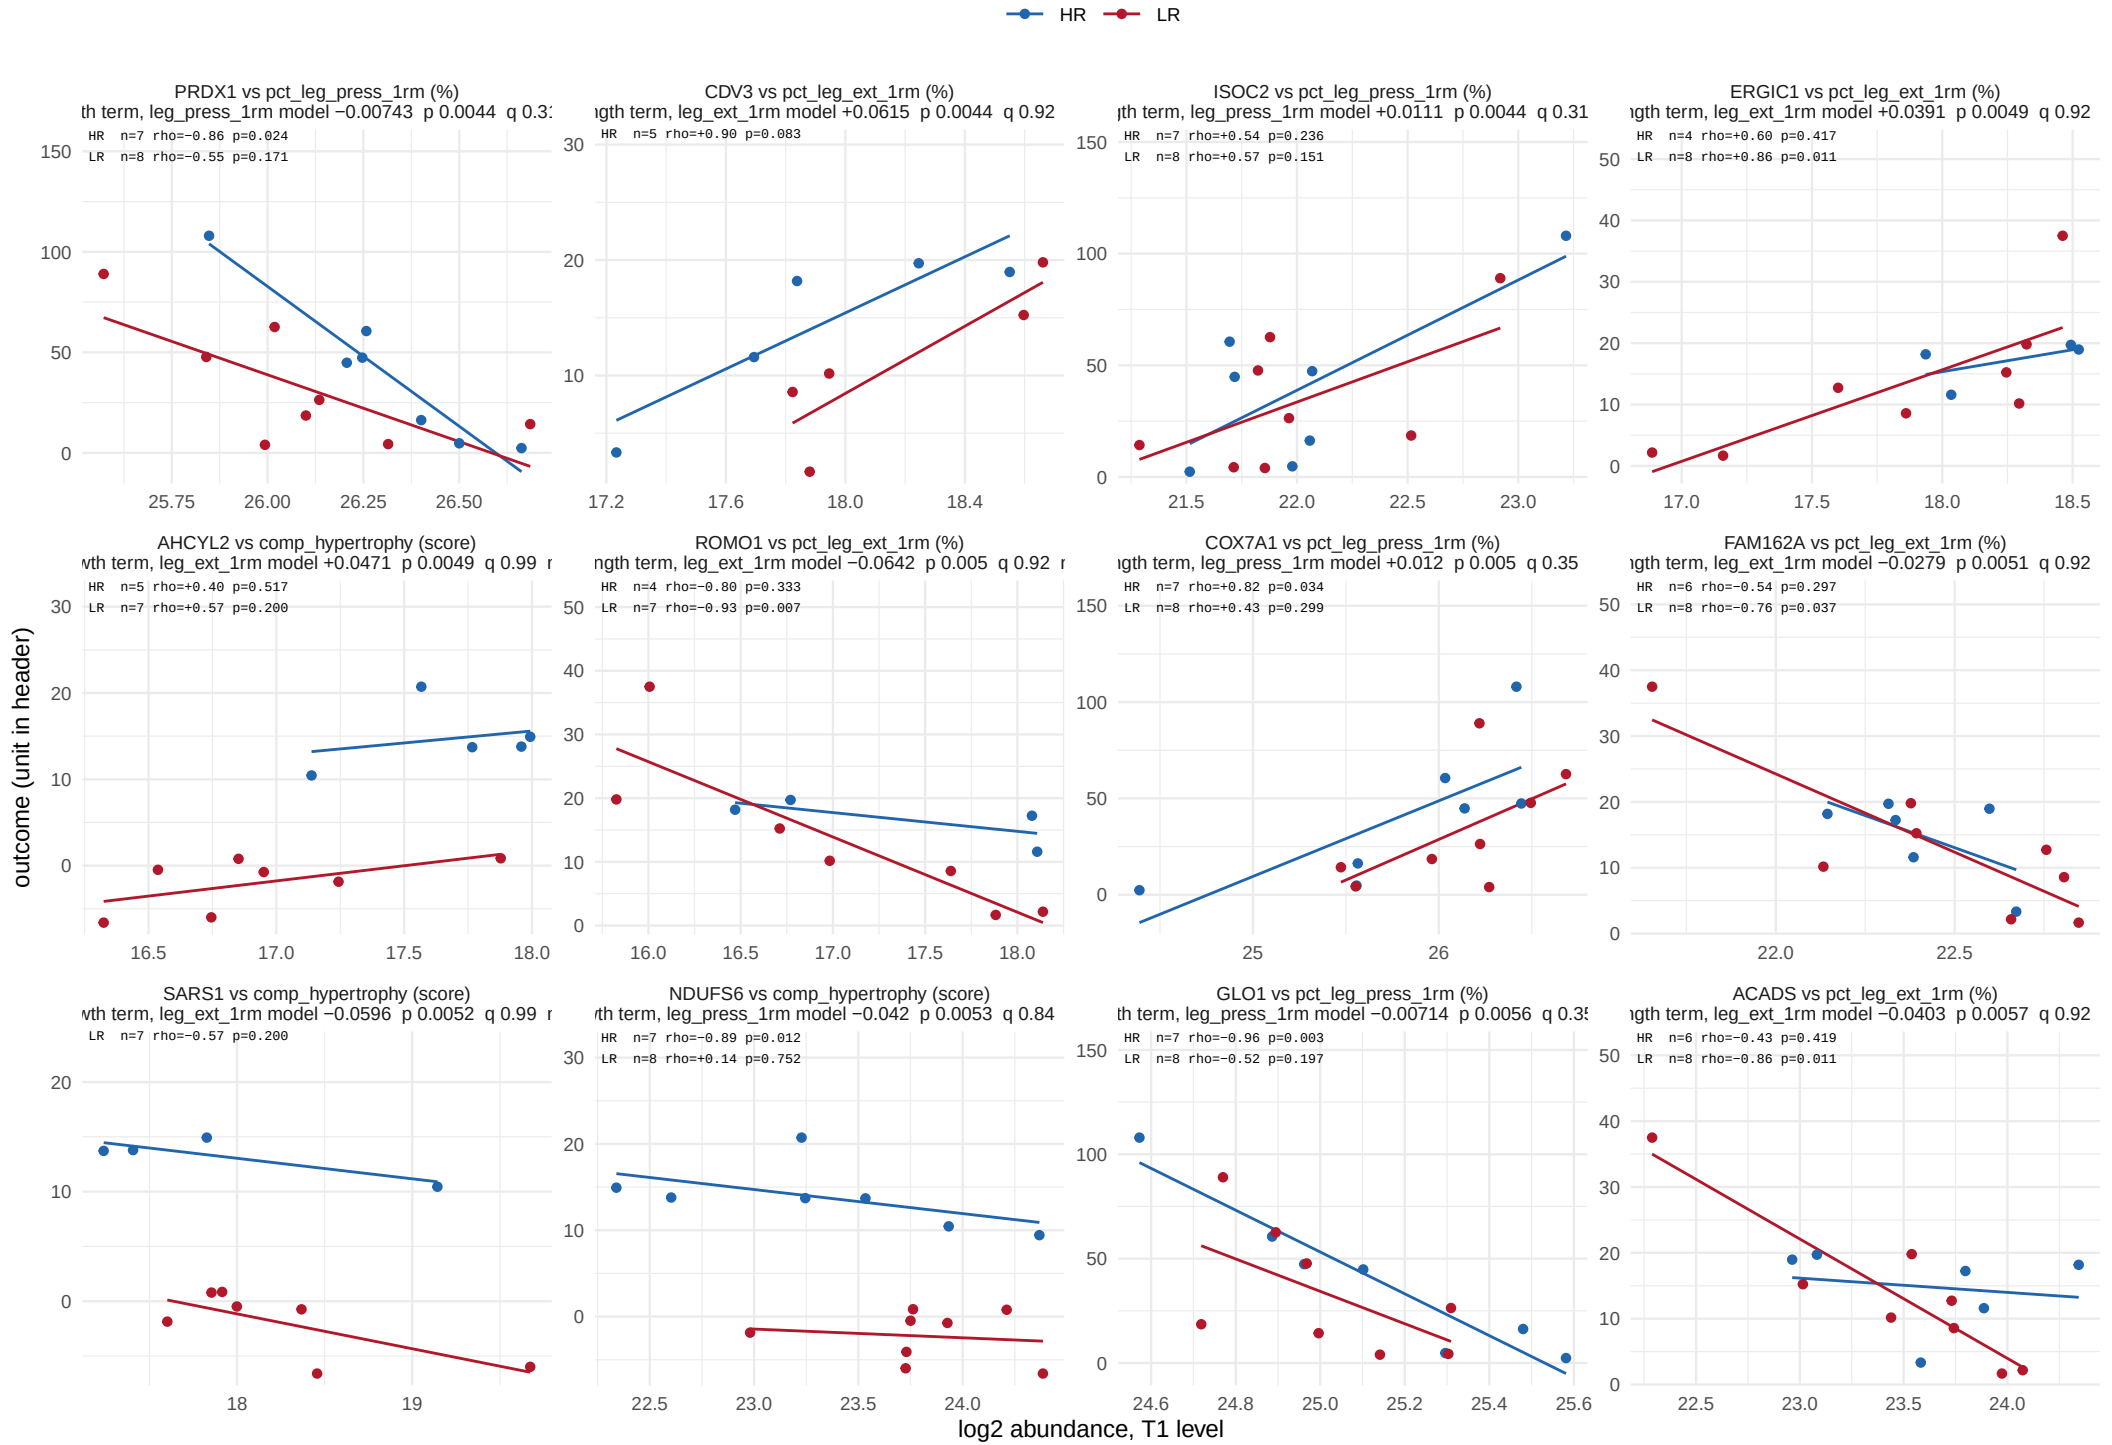

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.


Two predictor, baseline window

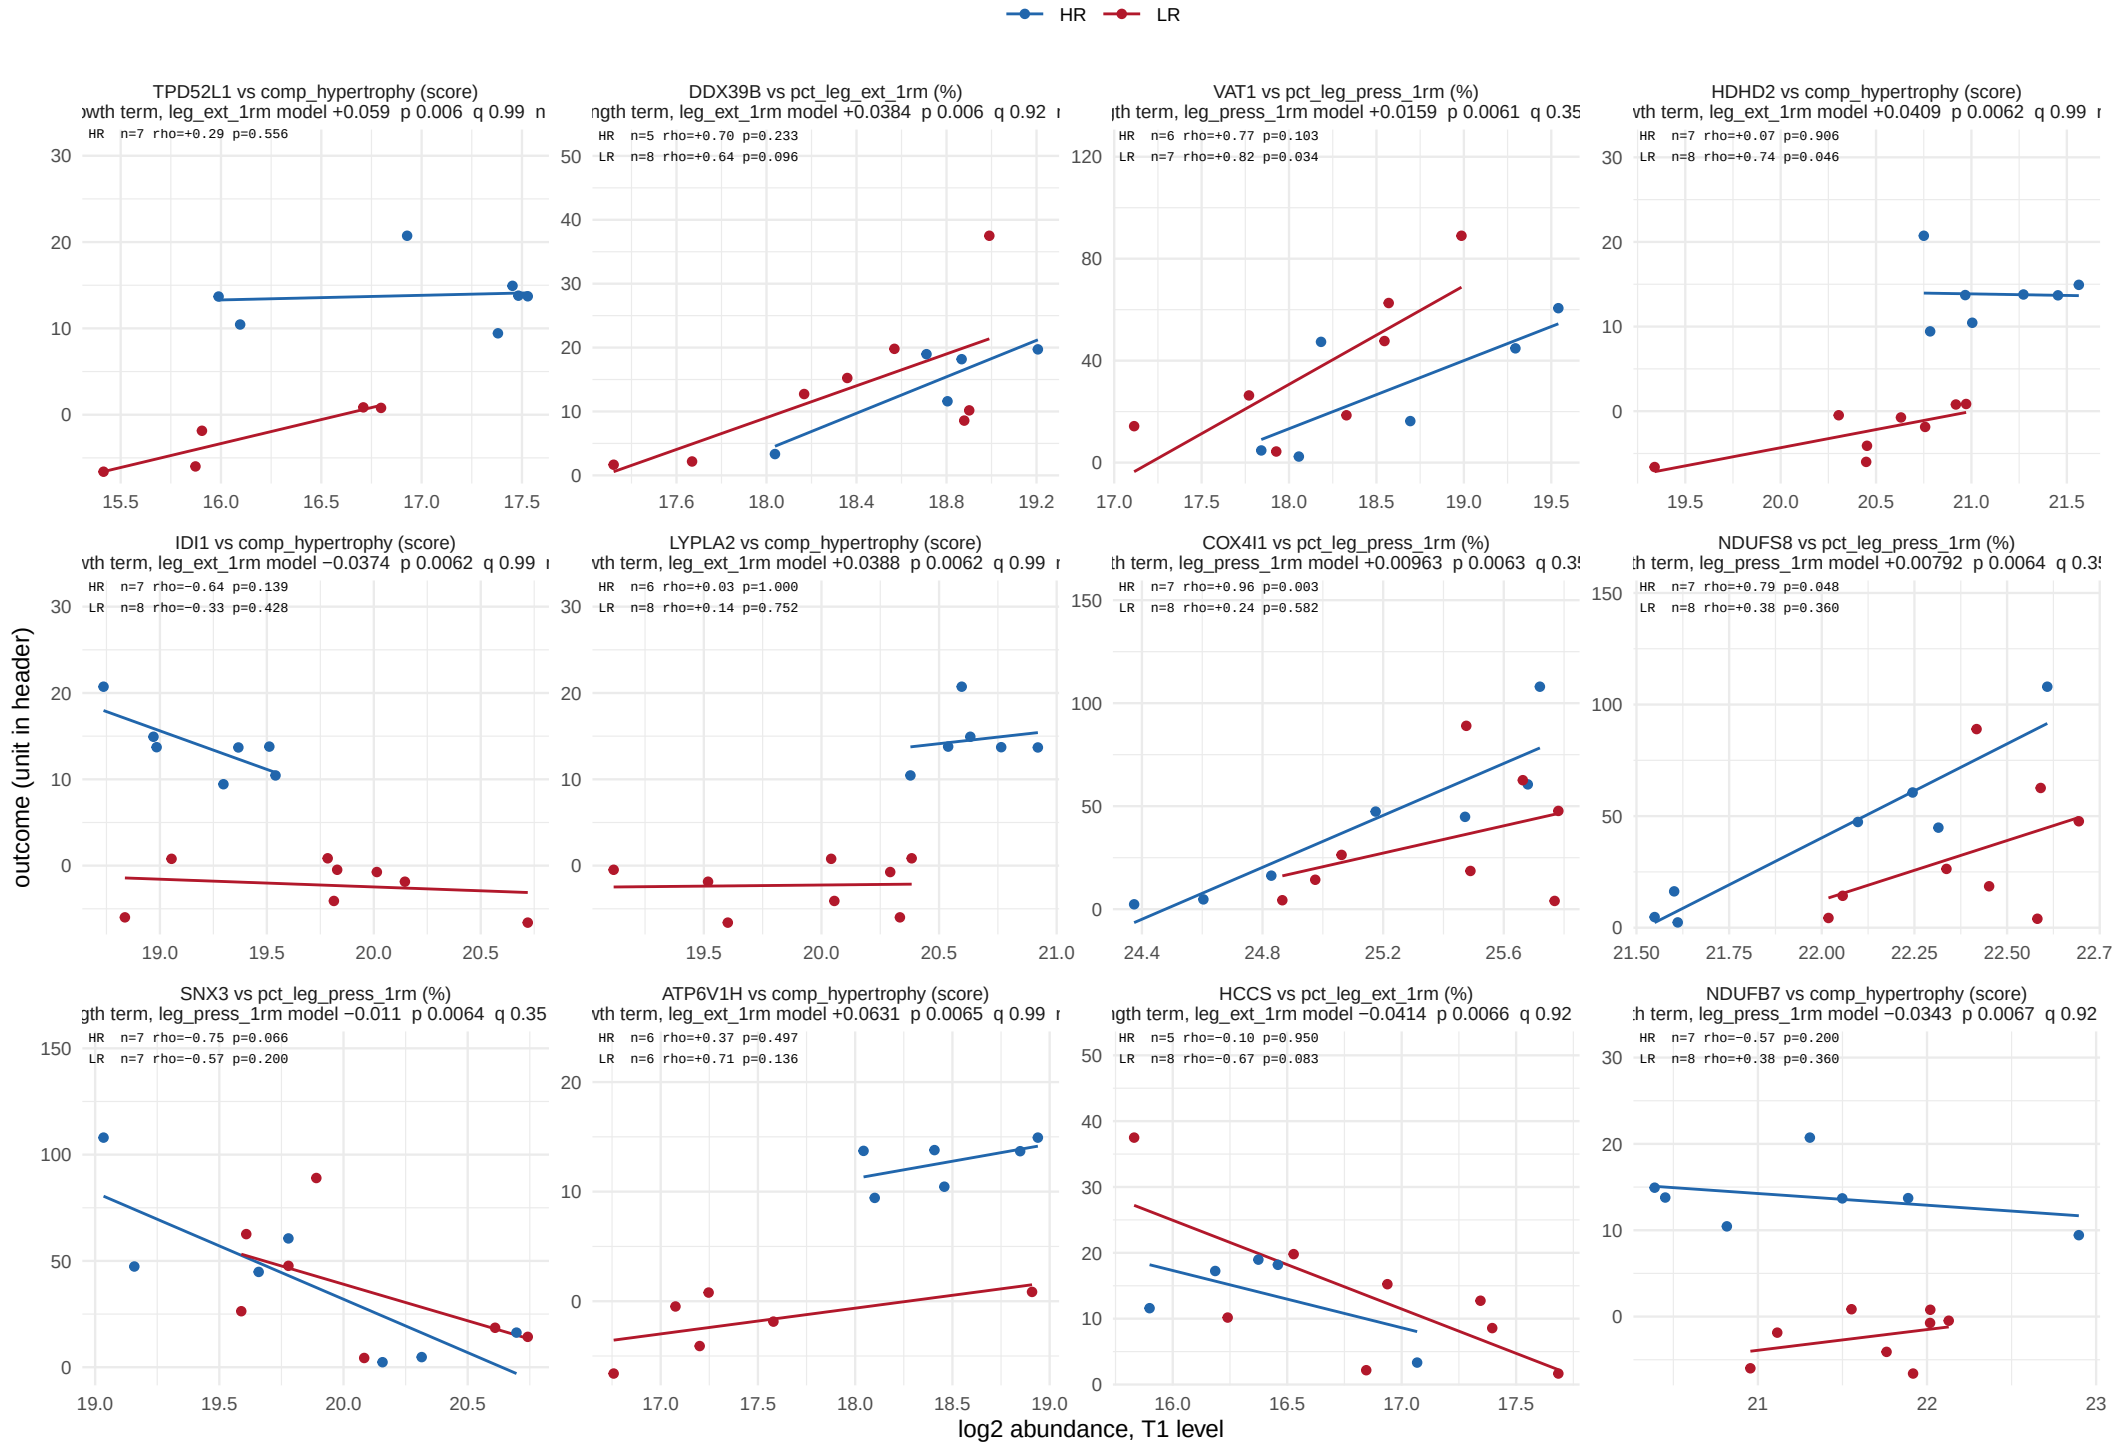

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.


Two predictor, baseline window

378 of 6218 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 6 of 32.

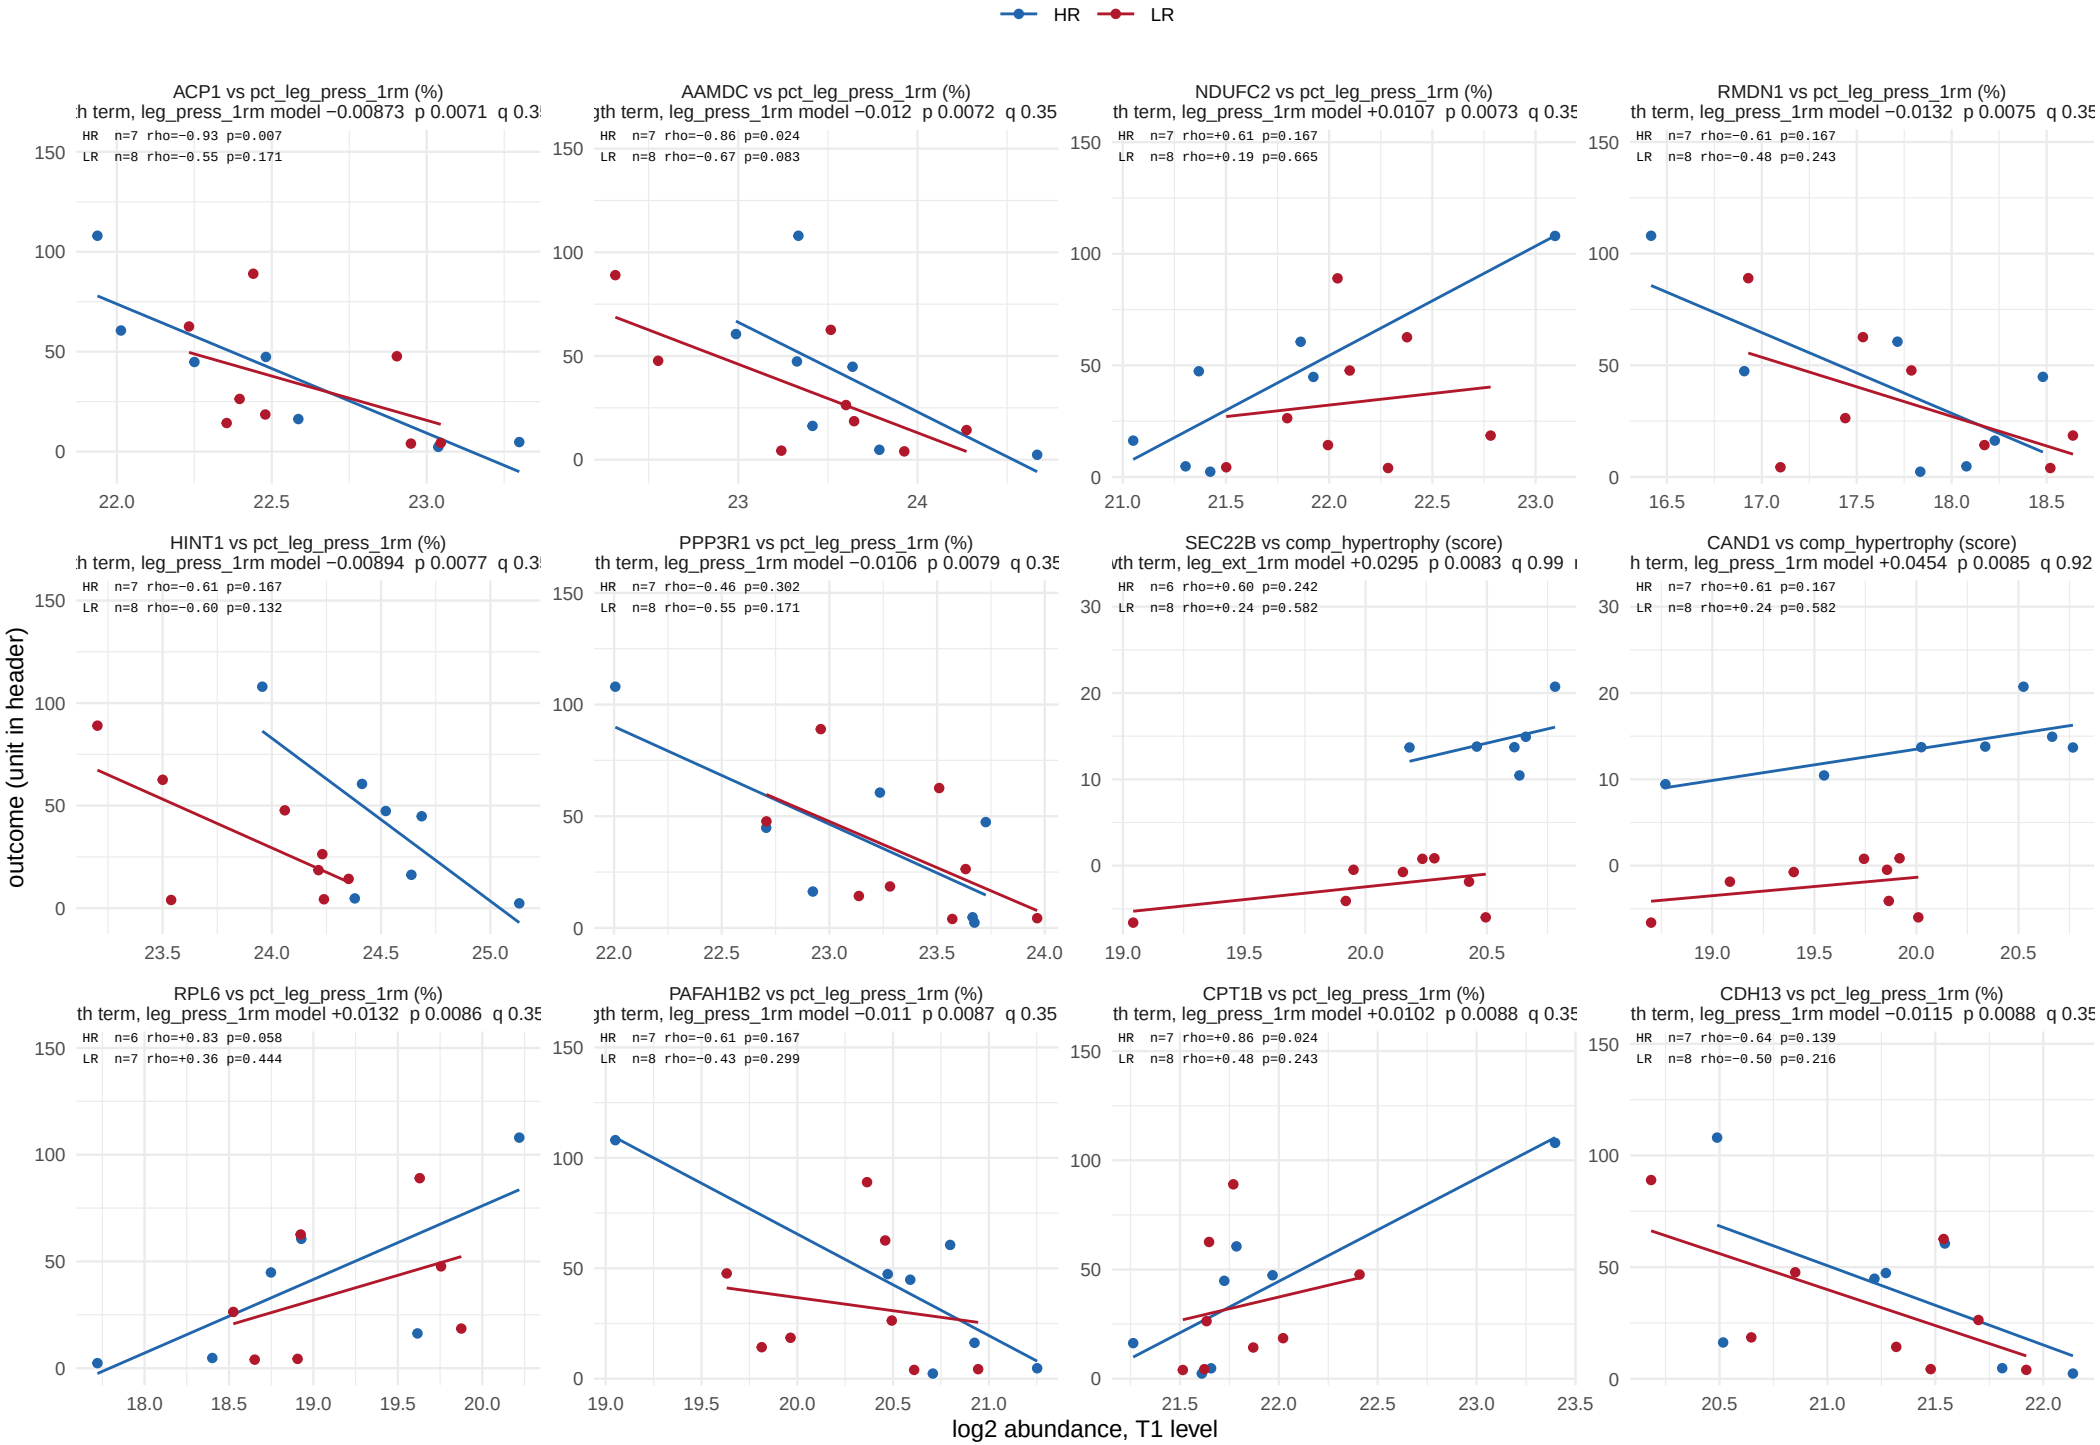


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, baseline window

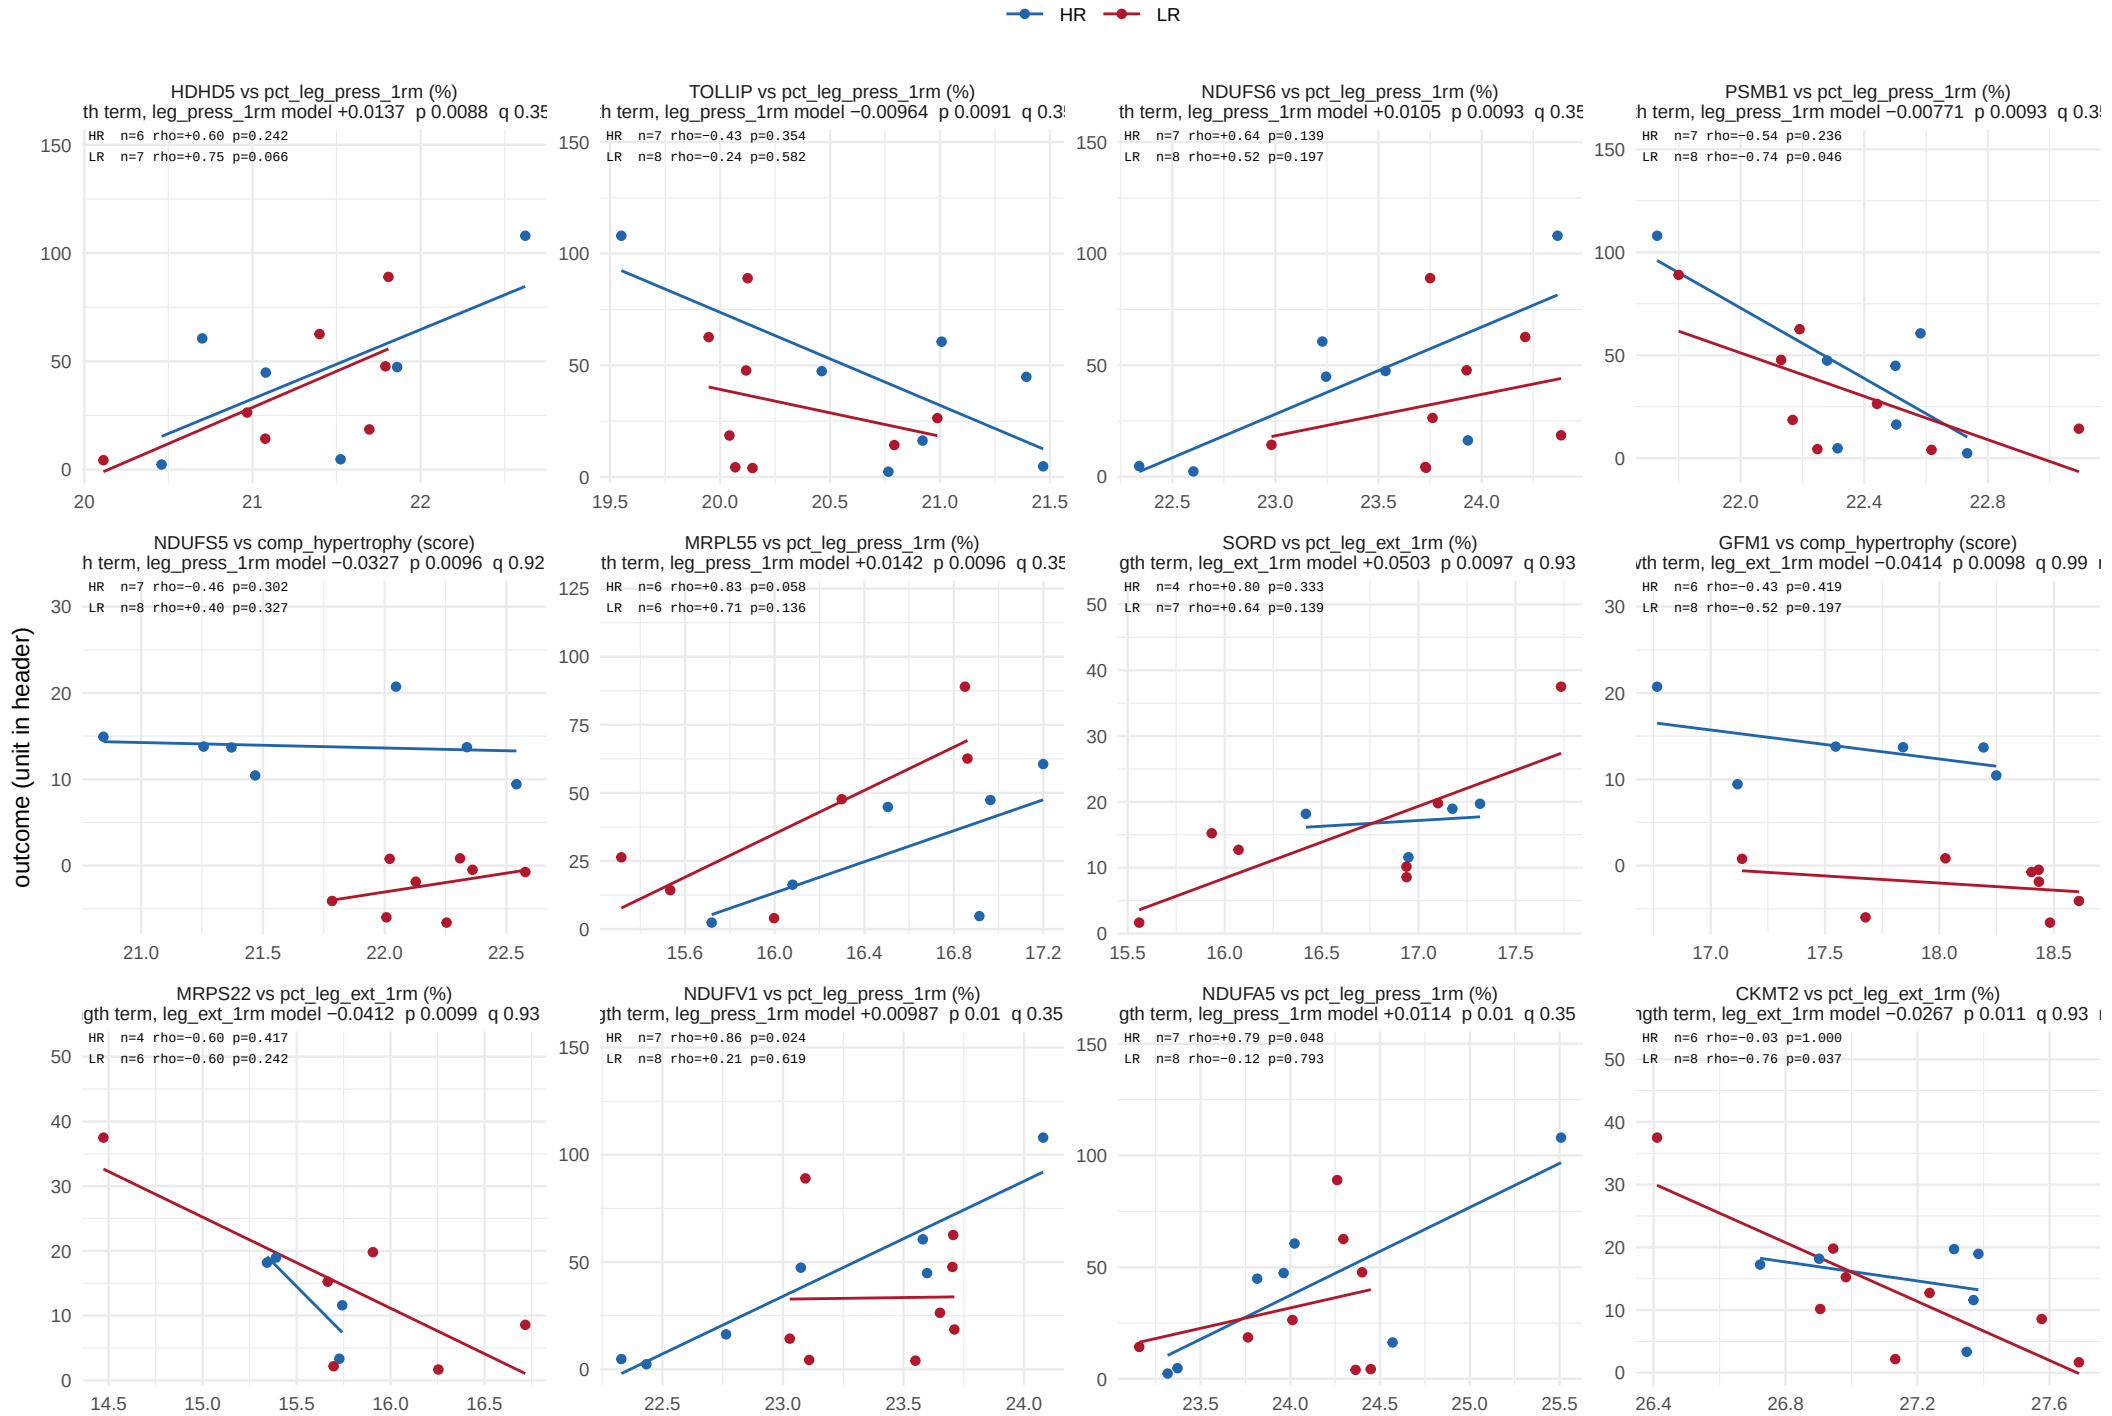

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.


Two predictor, baseline window

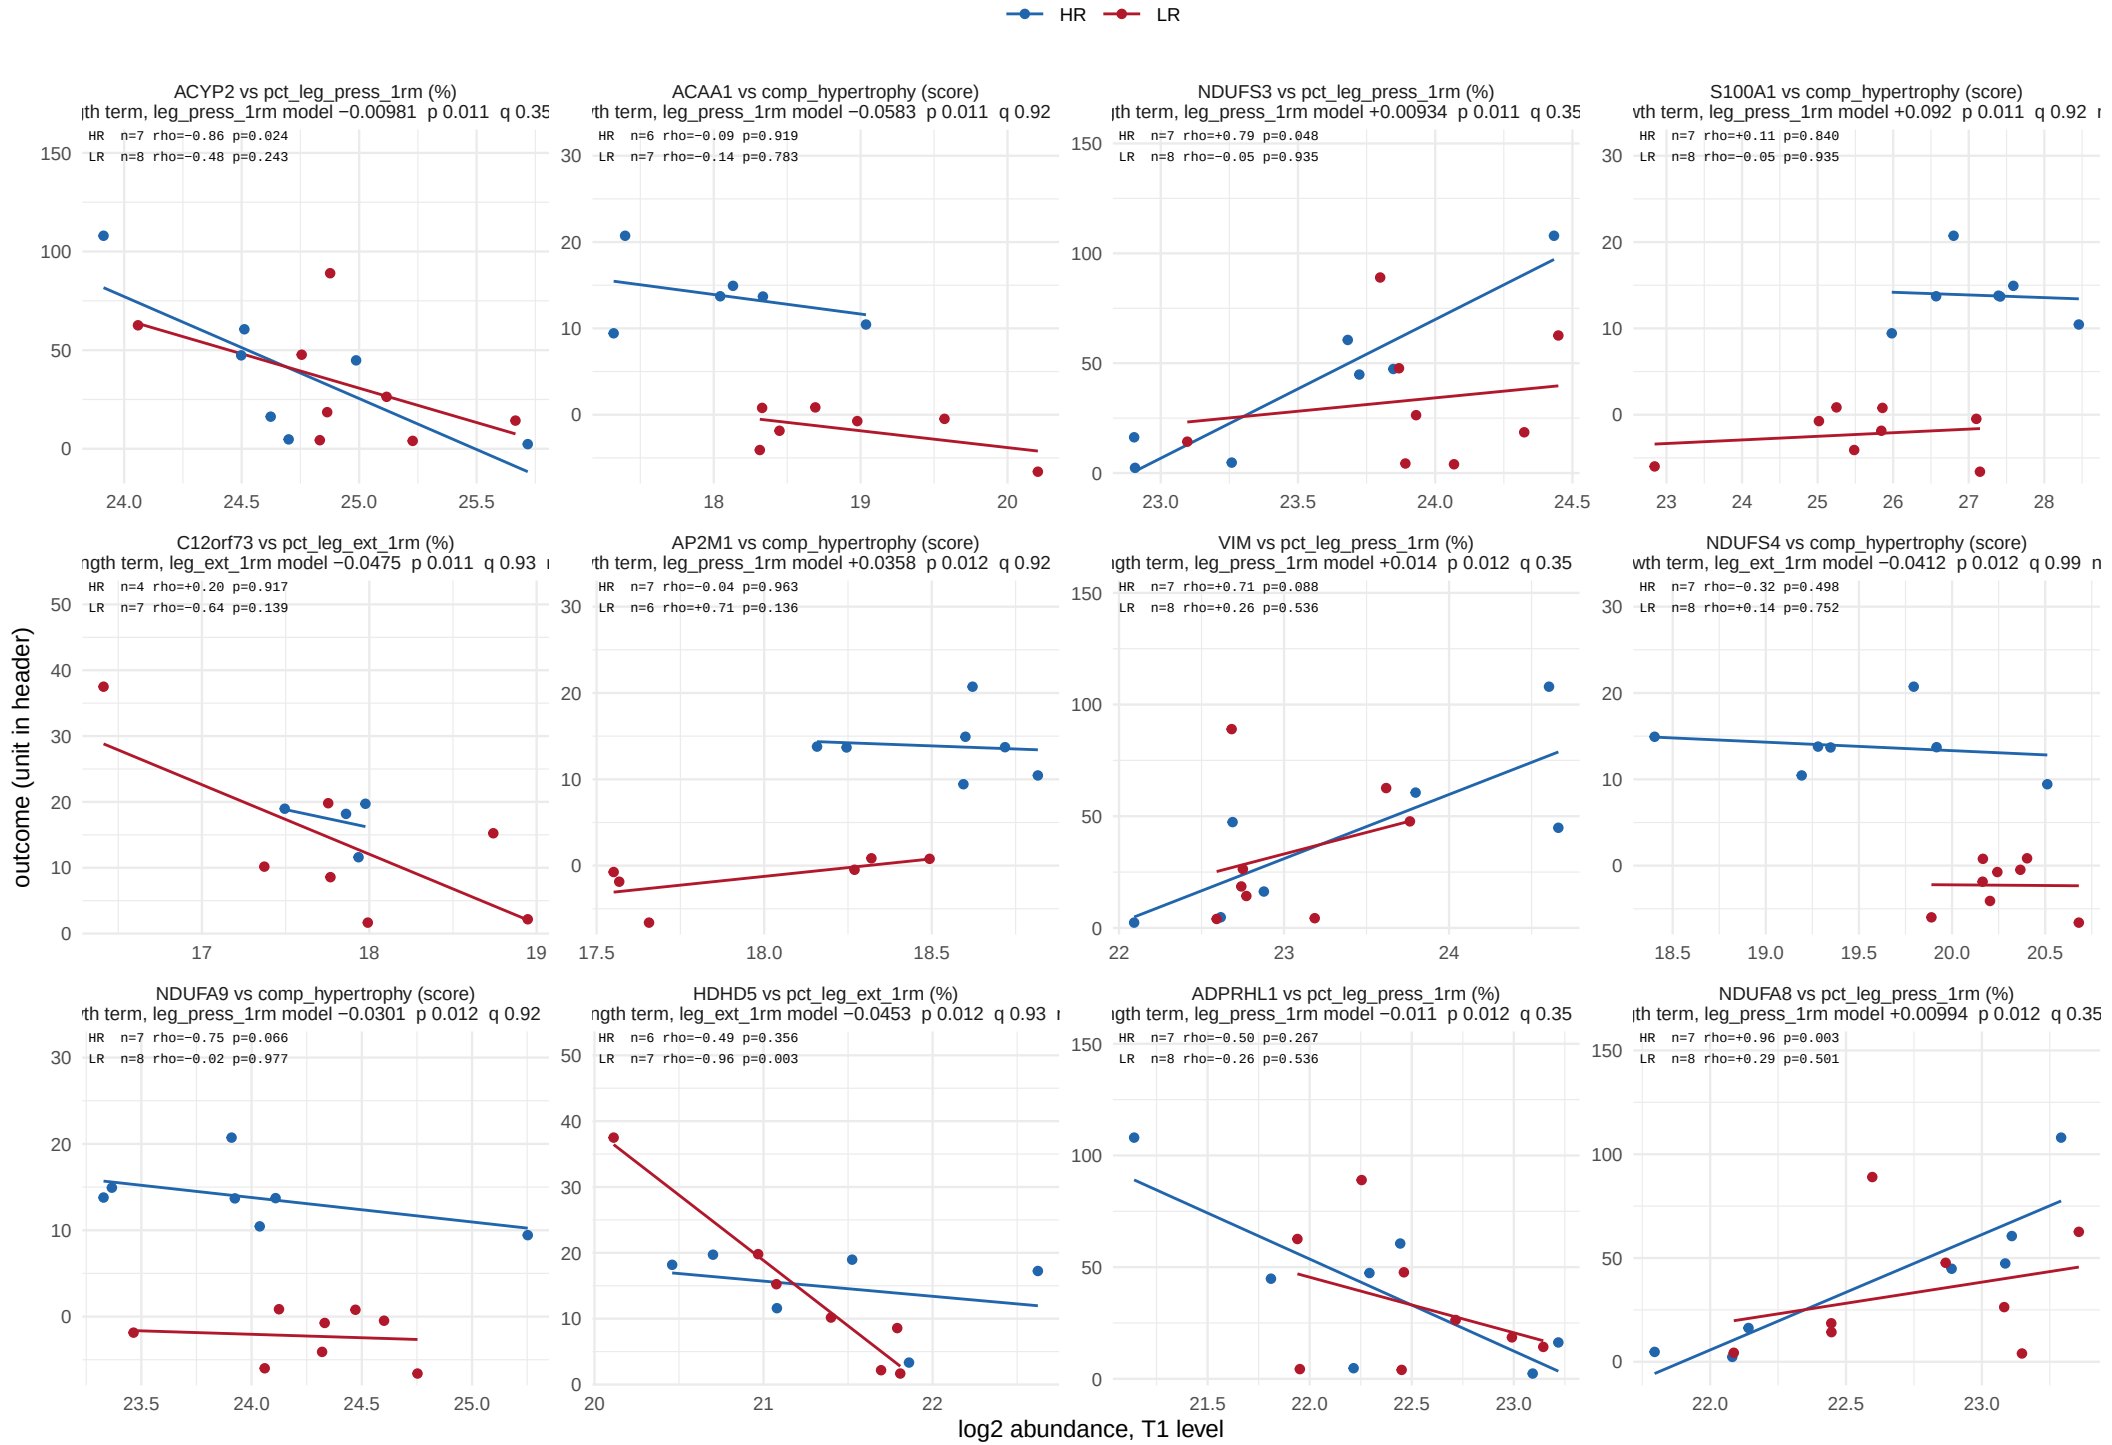

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.


Two predictor, baseline window

378 of 6218 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 9 of 32.

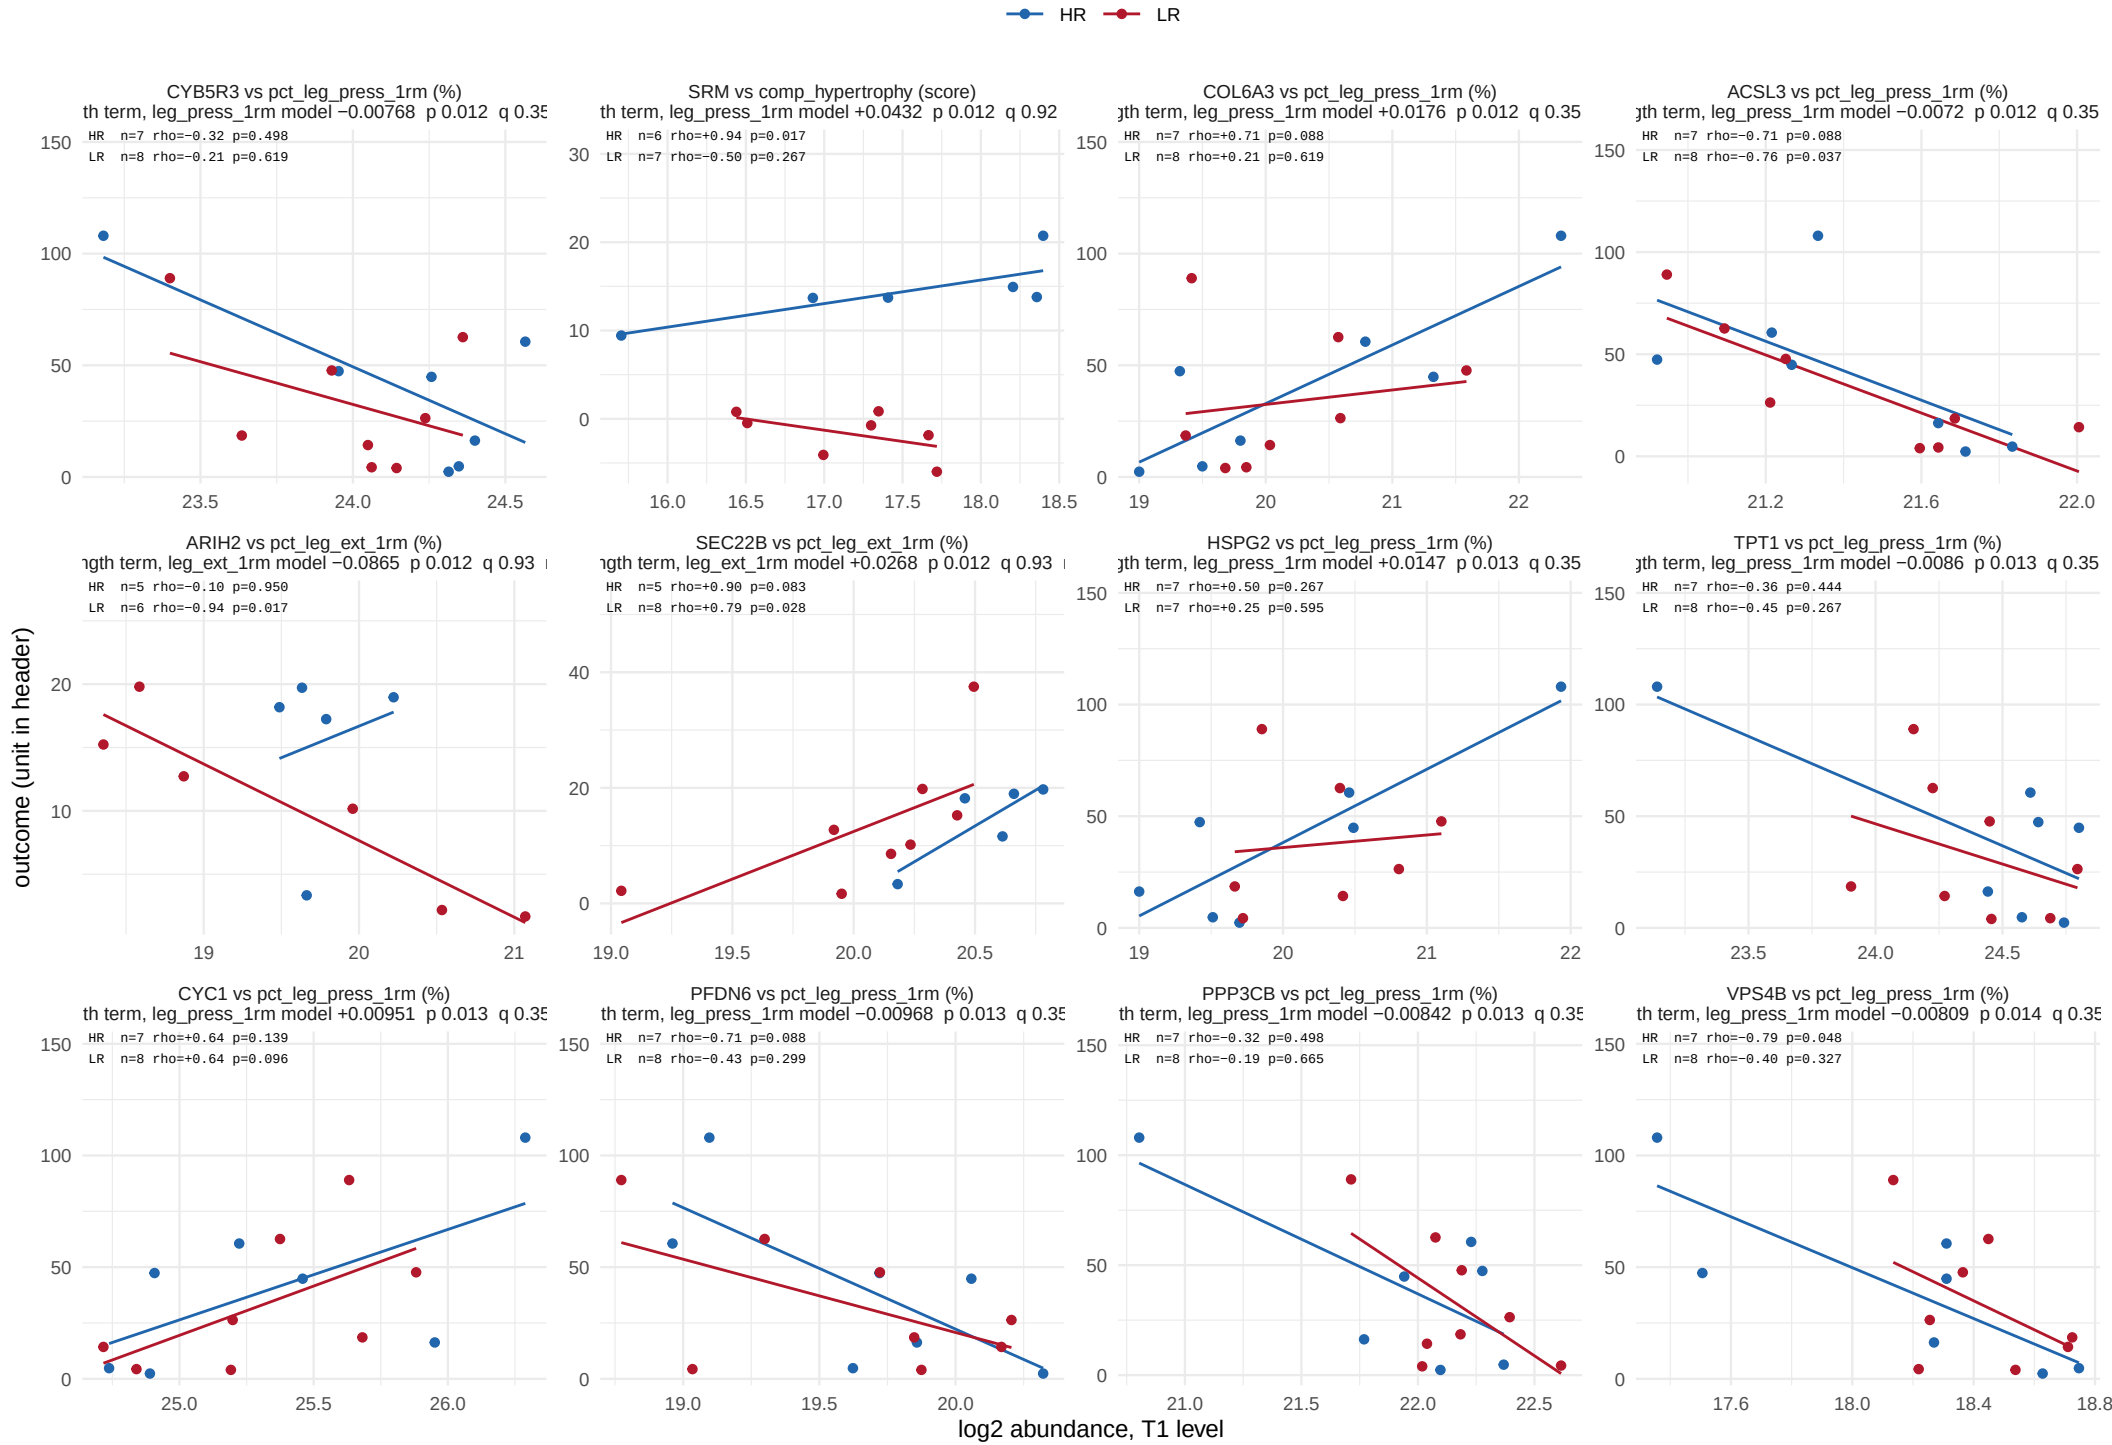

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.


Two predictor, baseline window

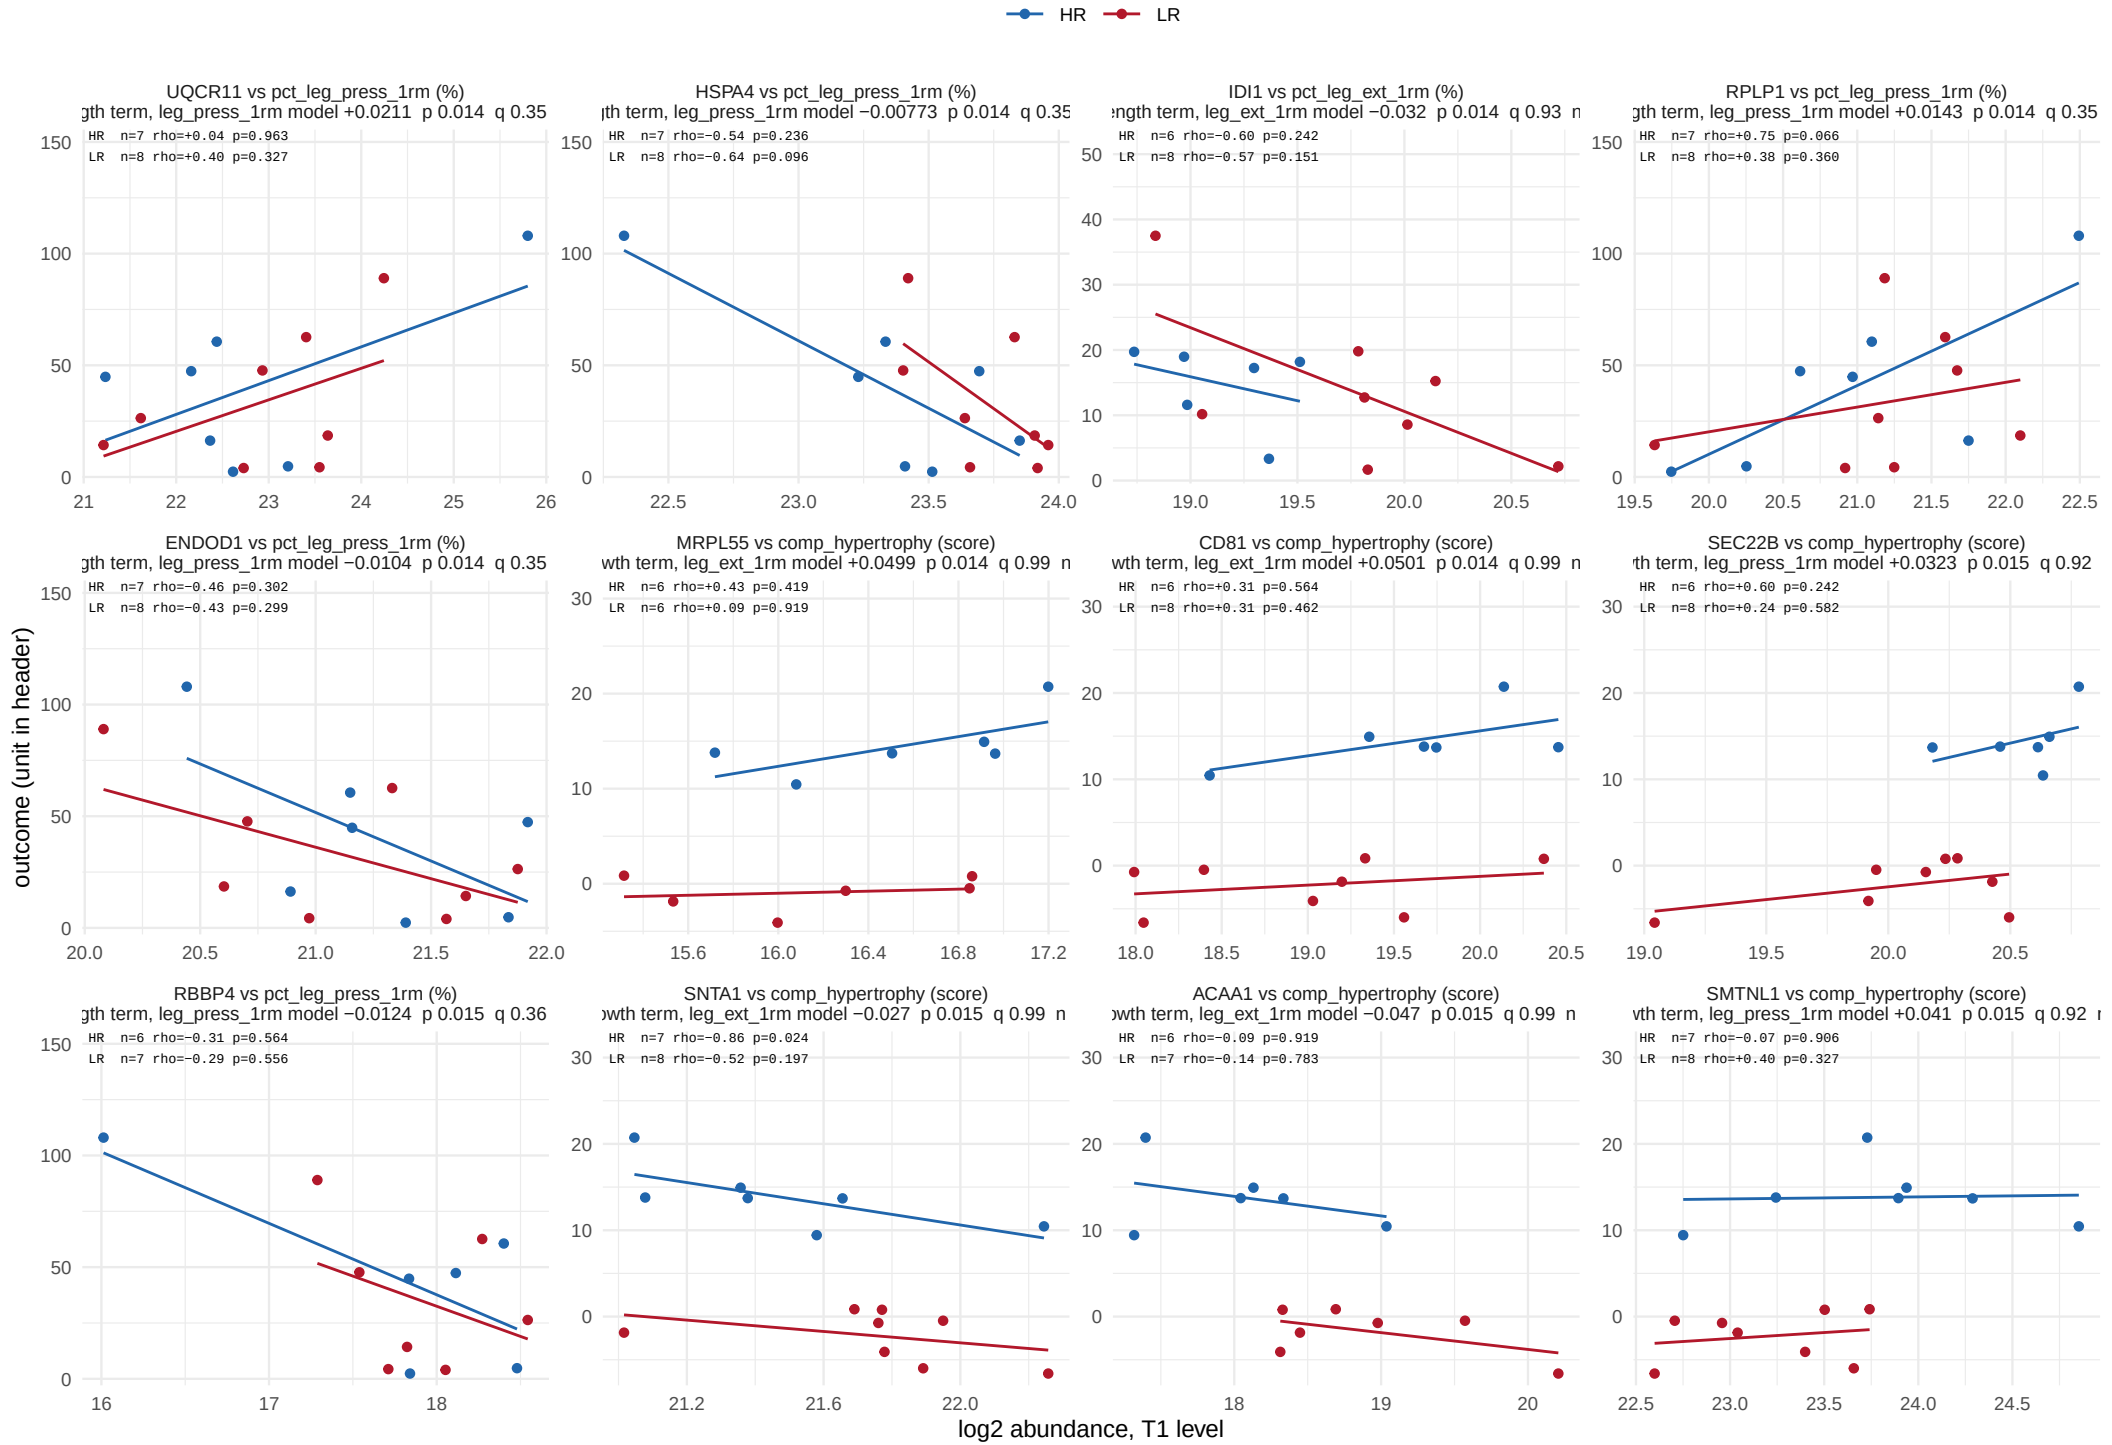

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.


Two predictor, baseline window

378 of 6218 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 11 of 32.

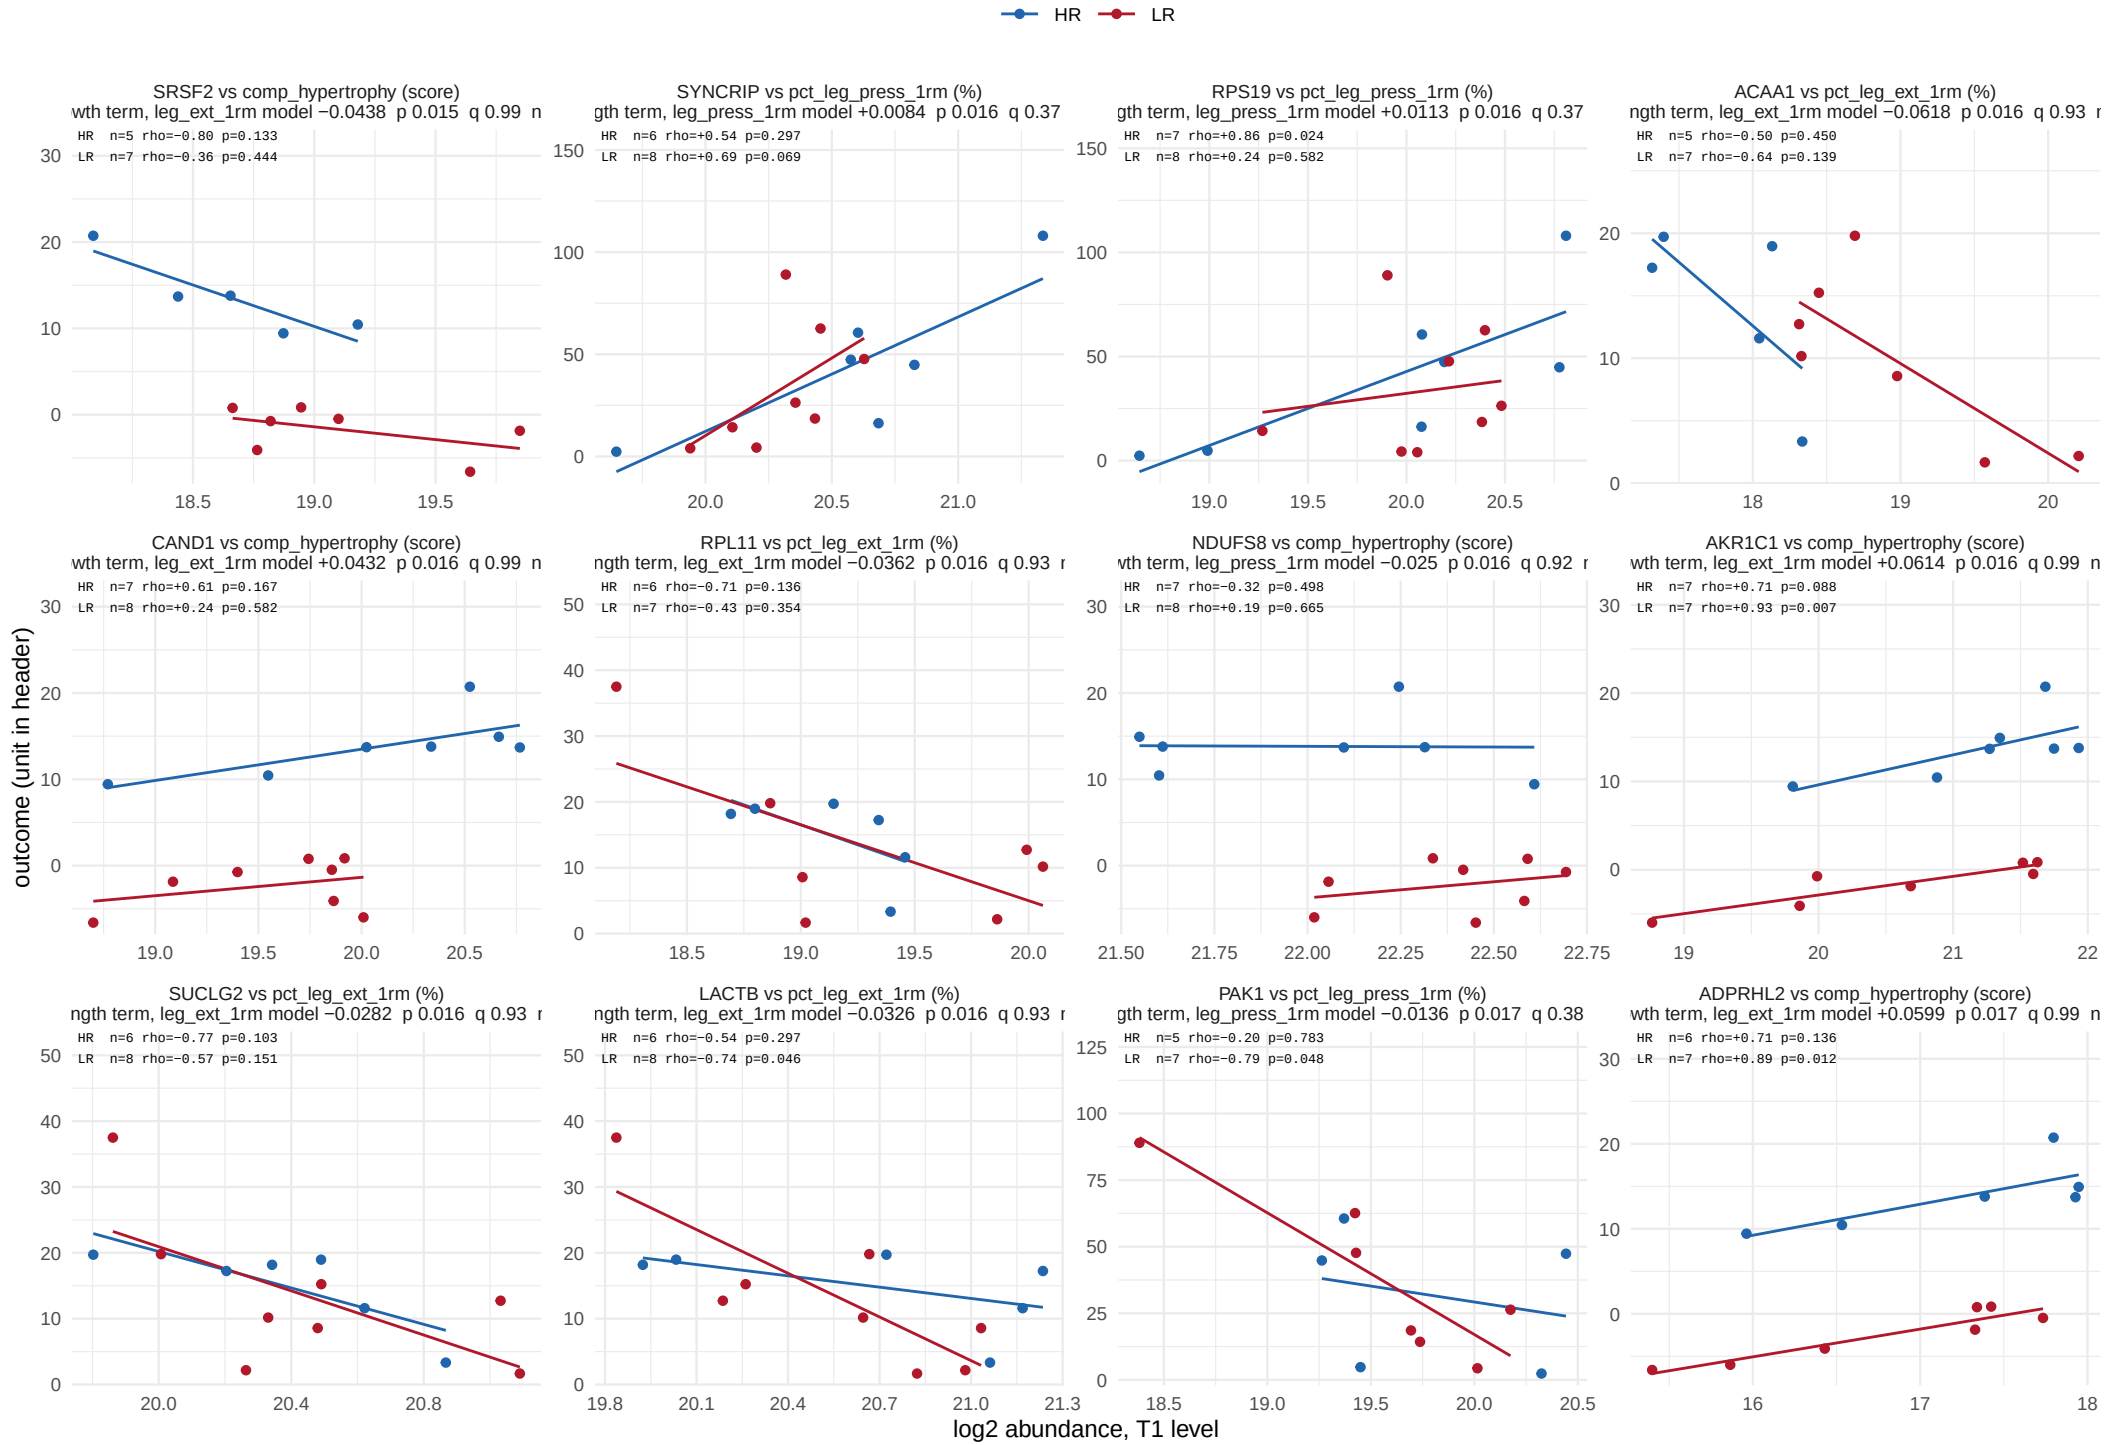


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, baseline window

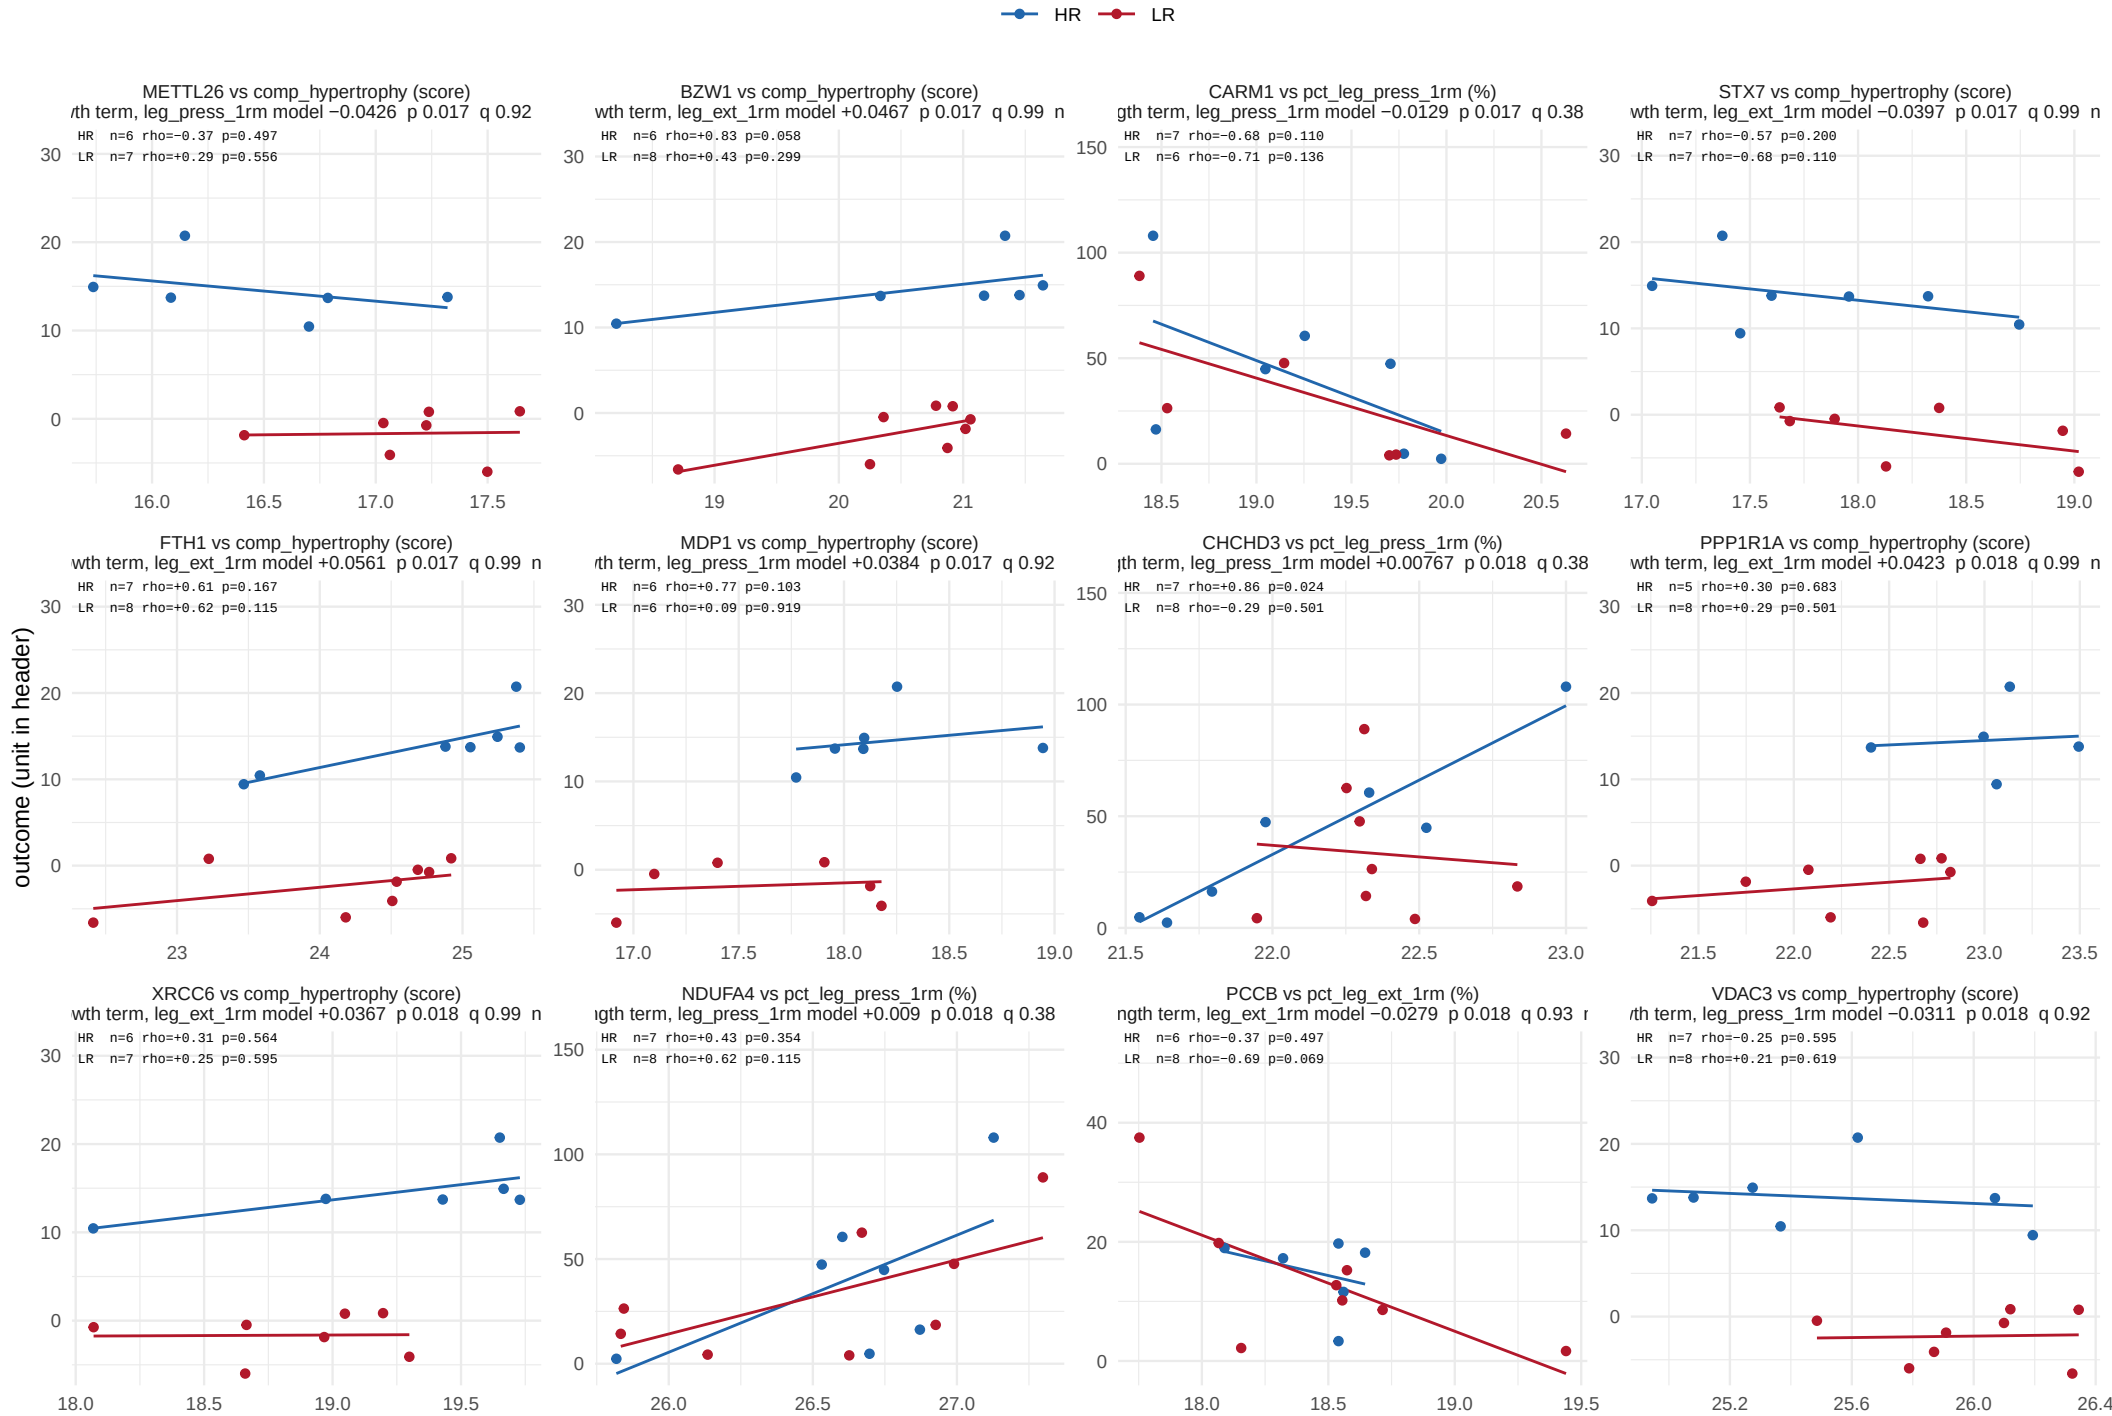


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, baseline window

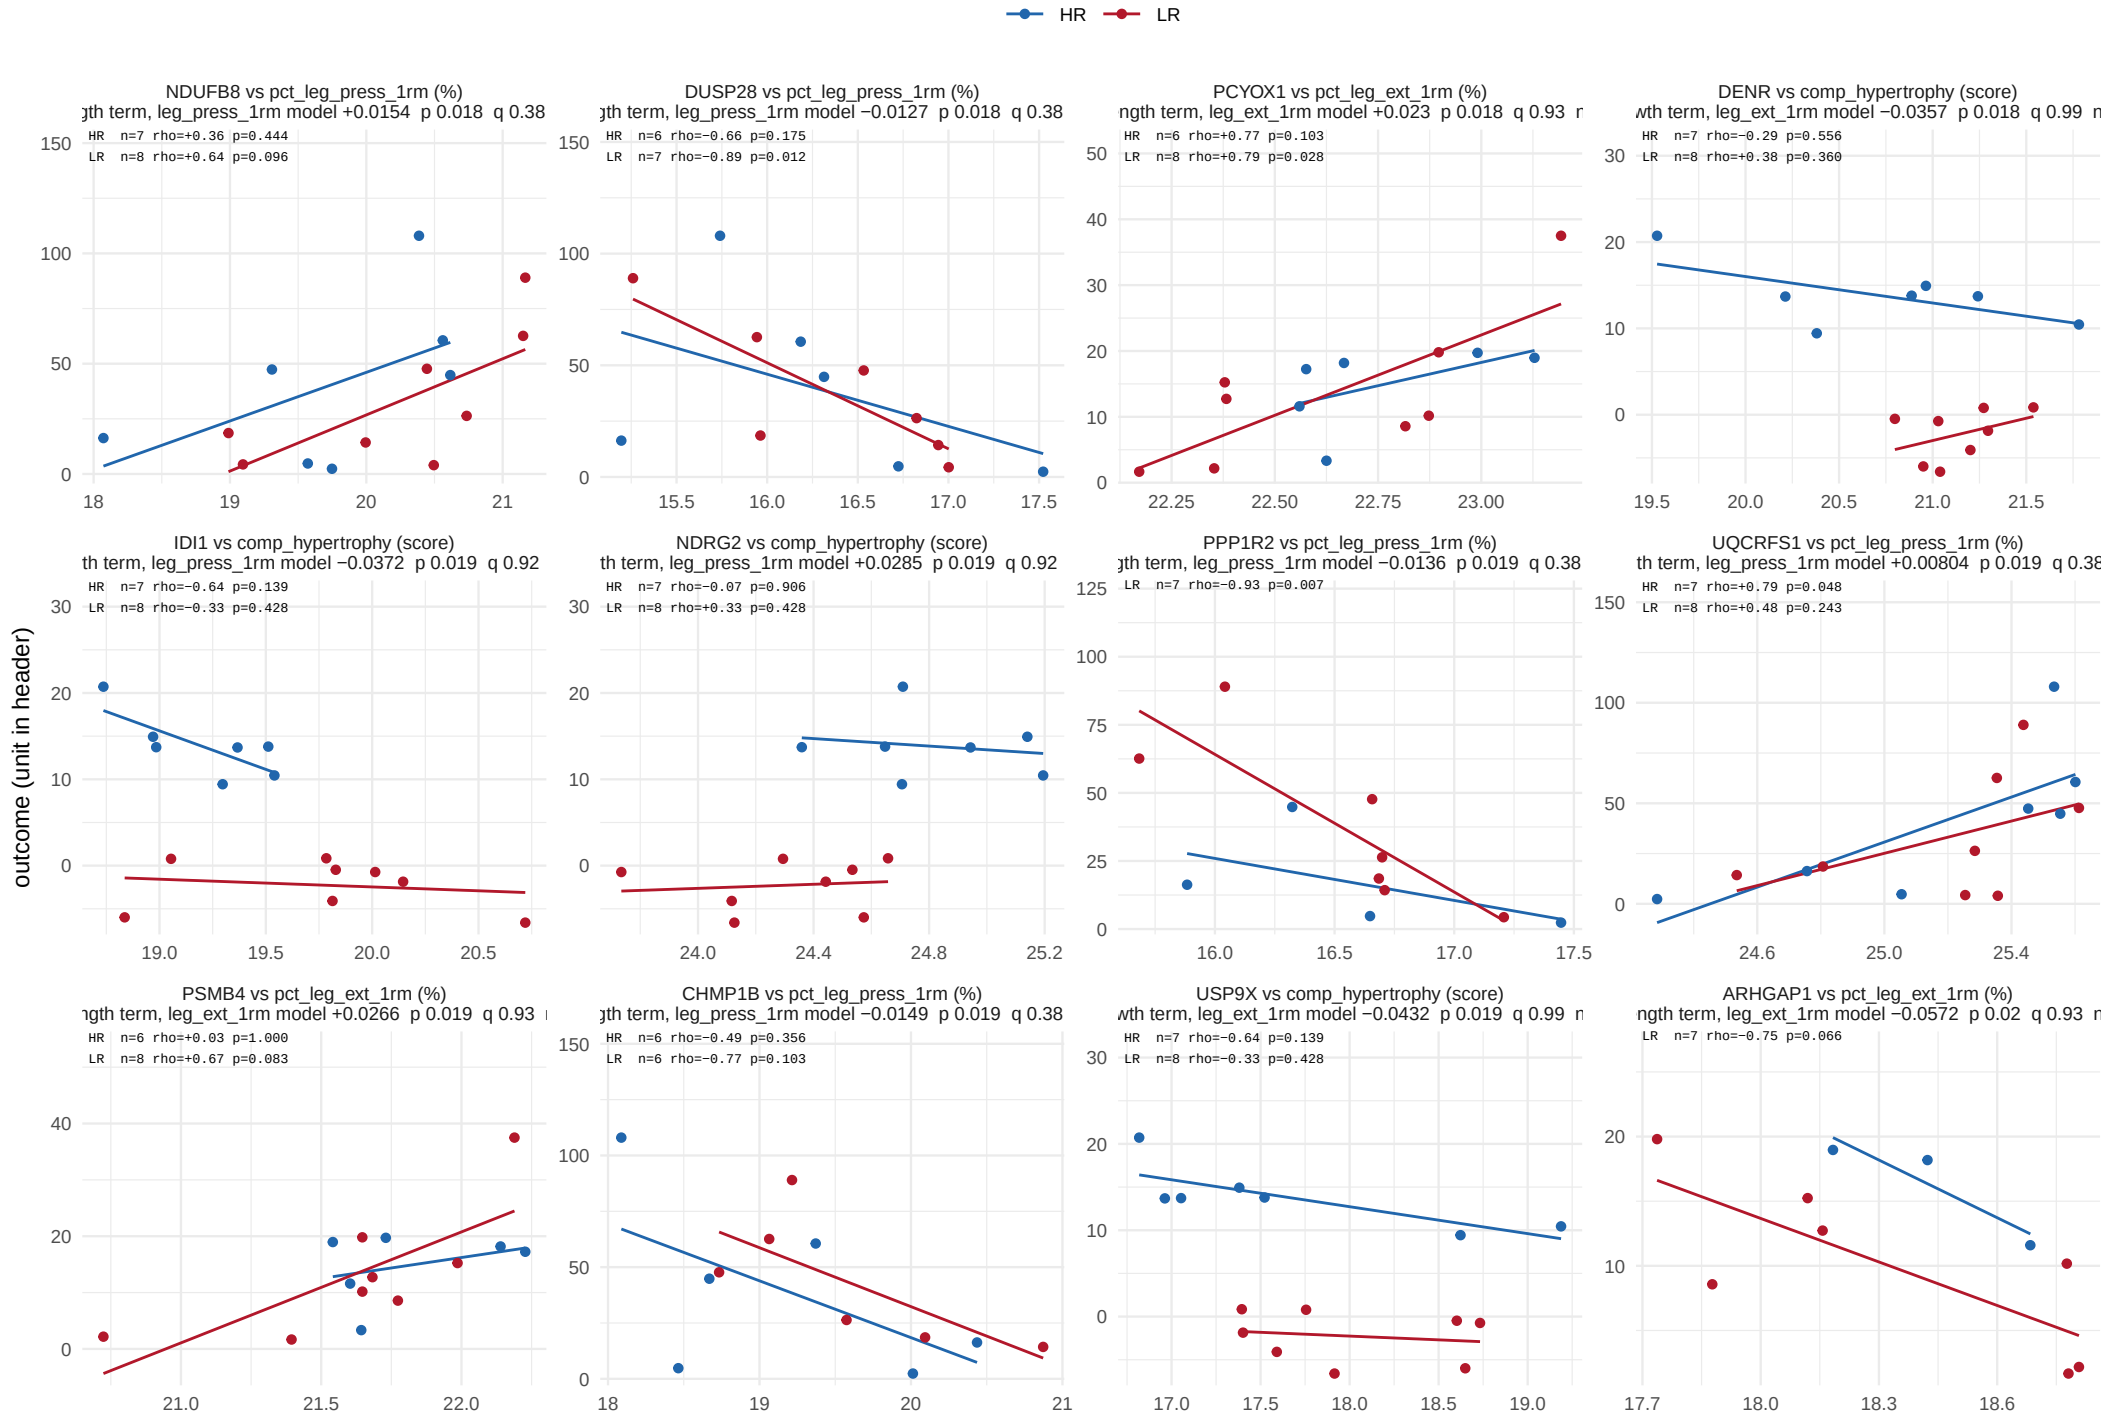

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.


Two predictor, baseline window

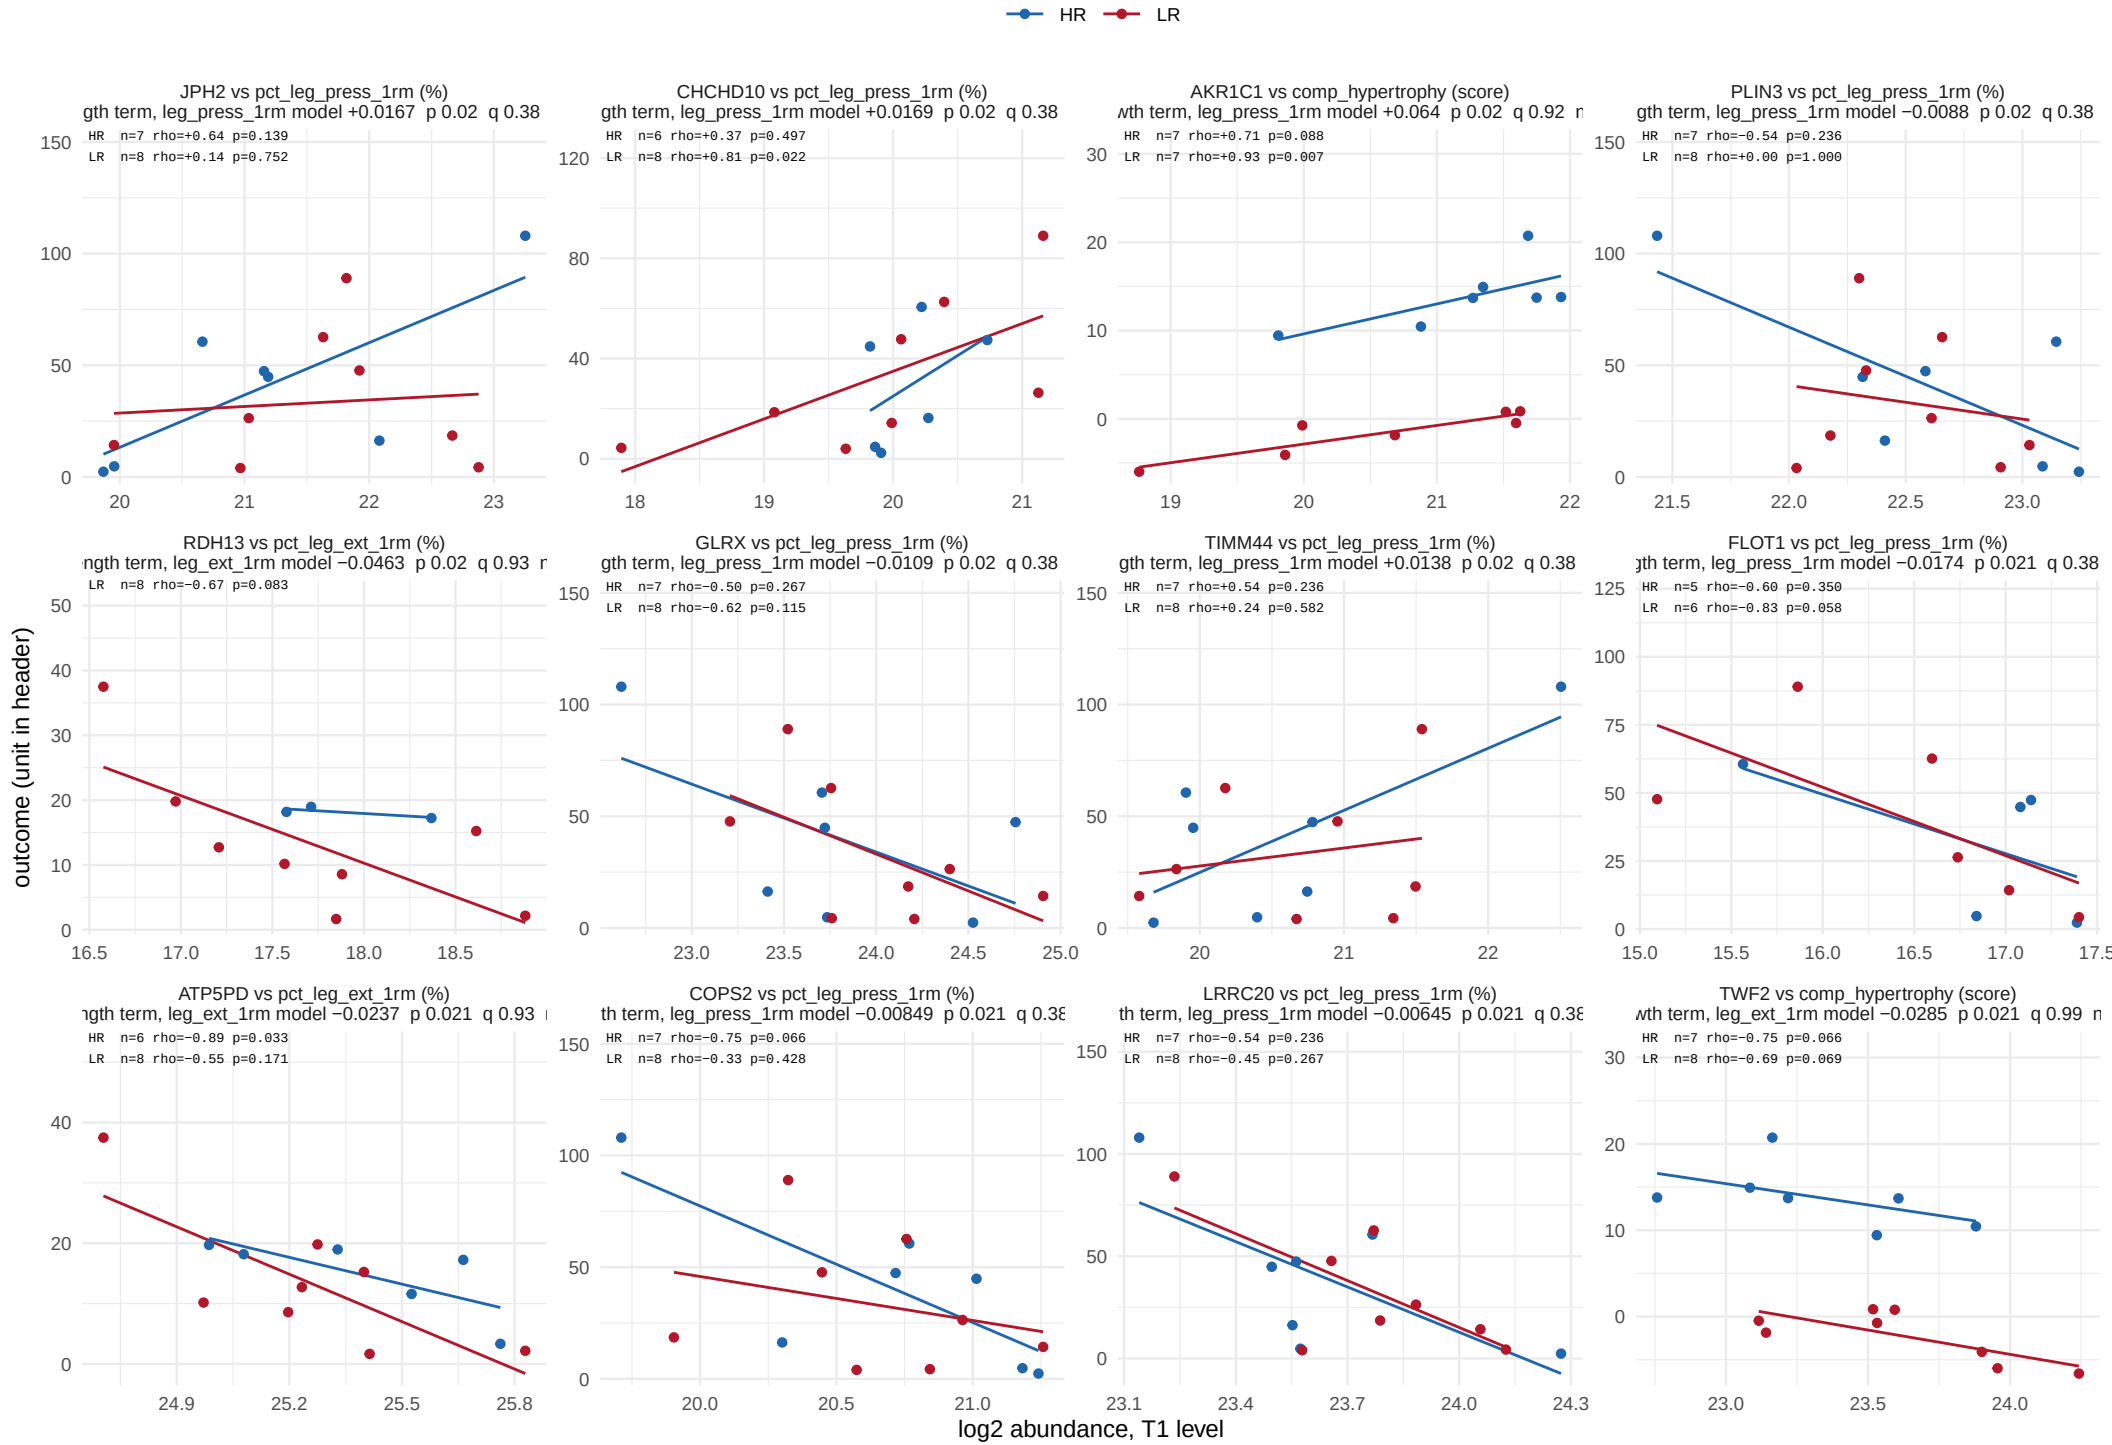

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.


Two predictor, baseline window

378 of 6218 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 15 of 32.

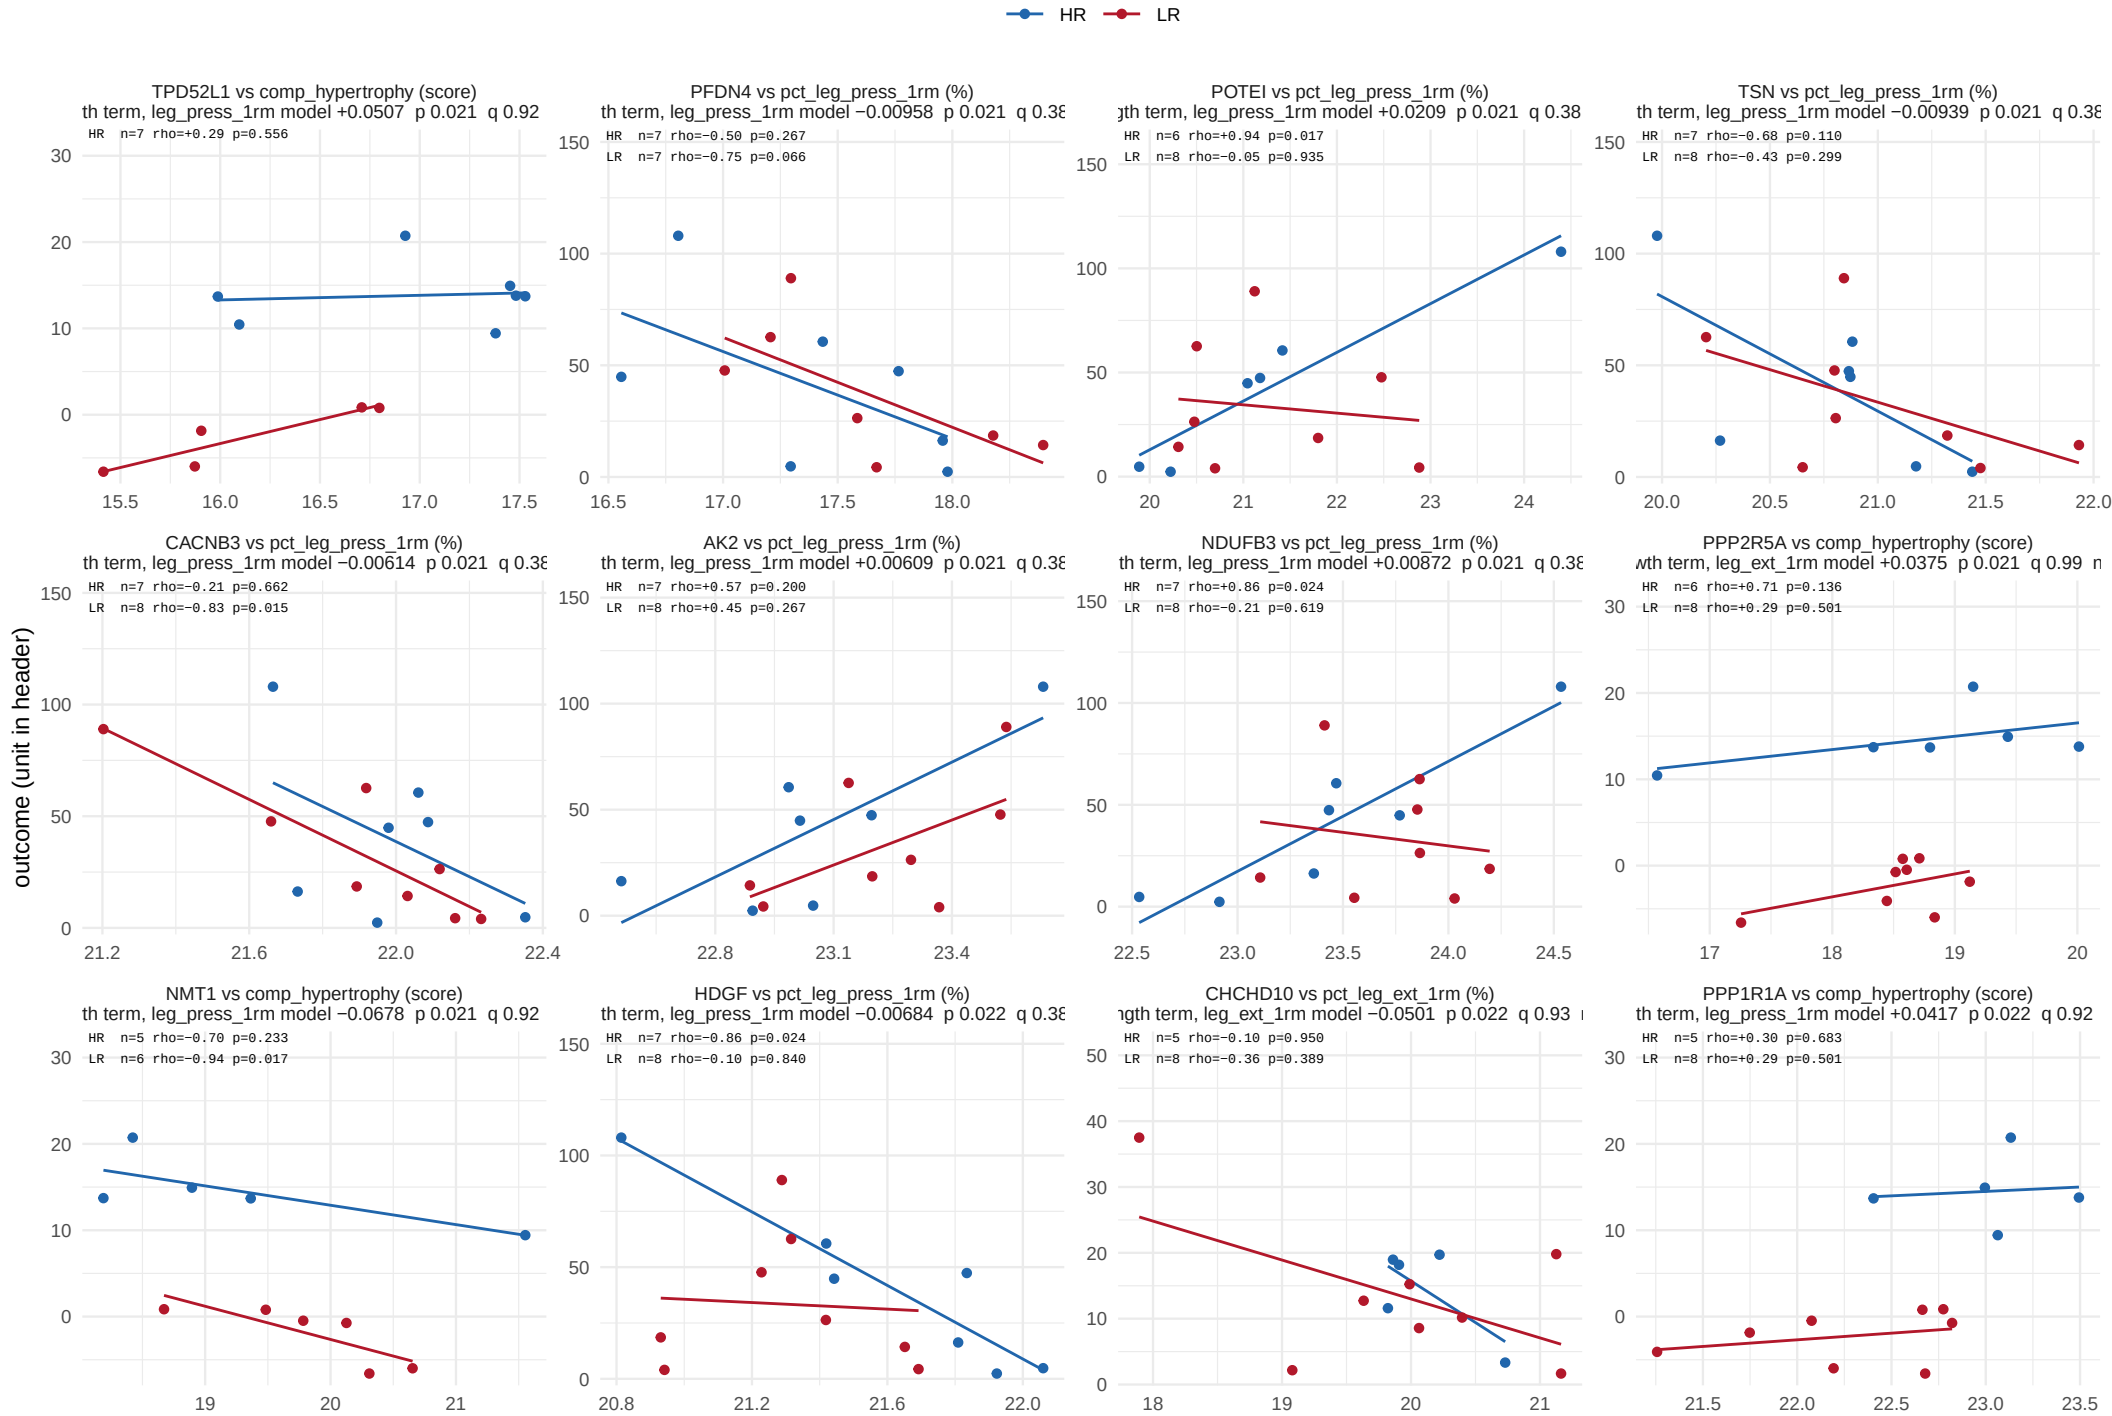


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, baseline window

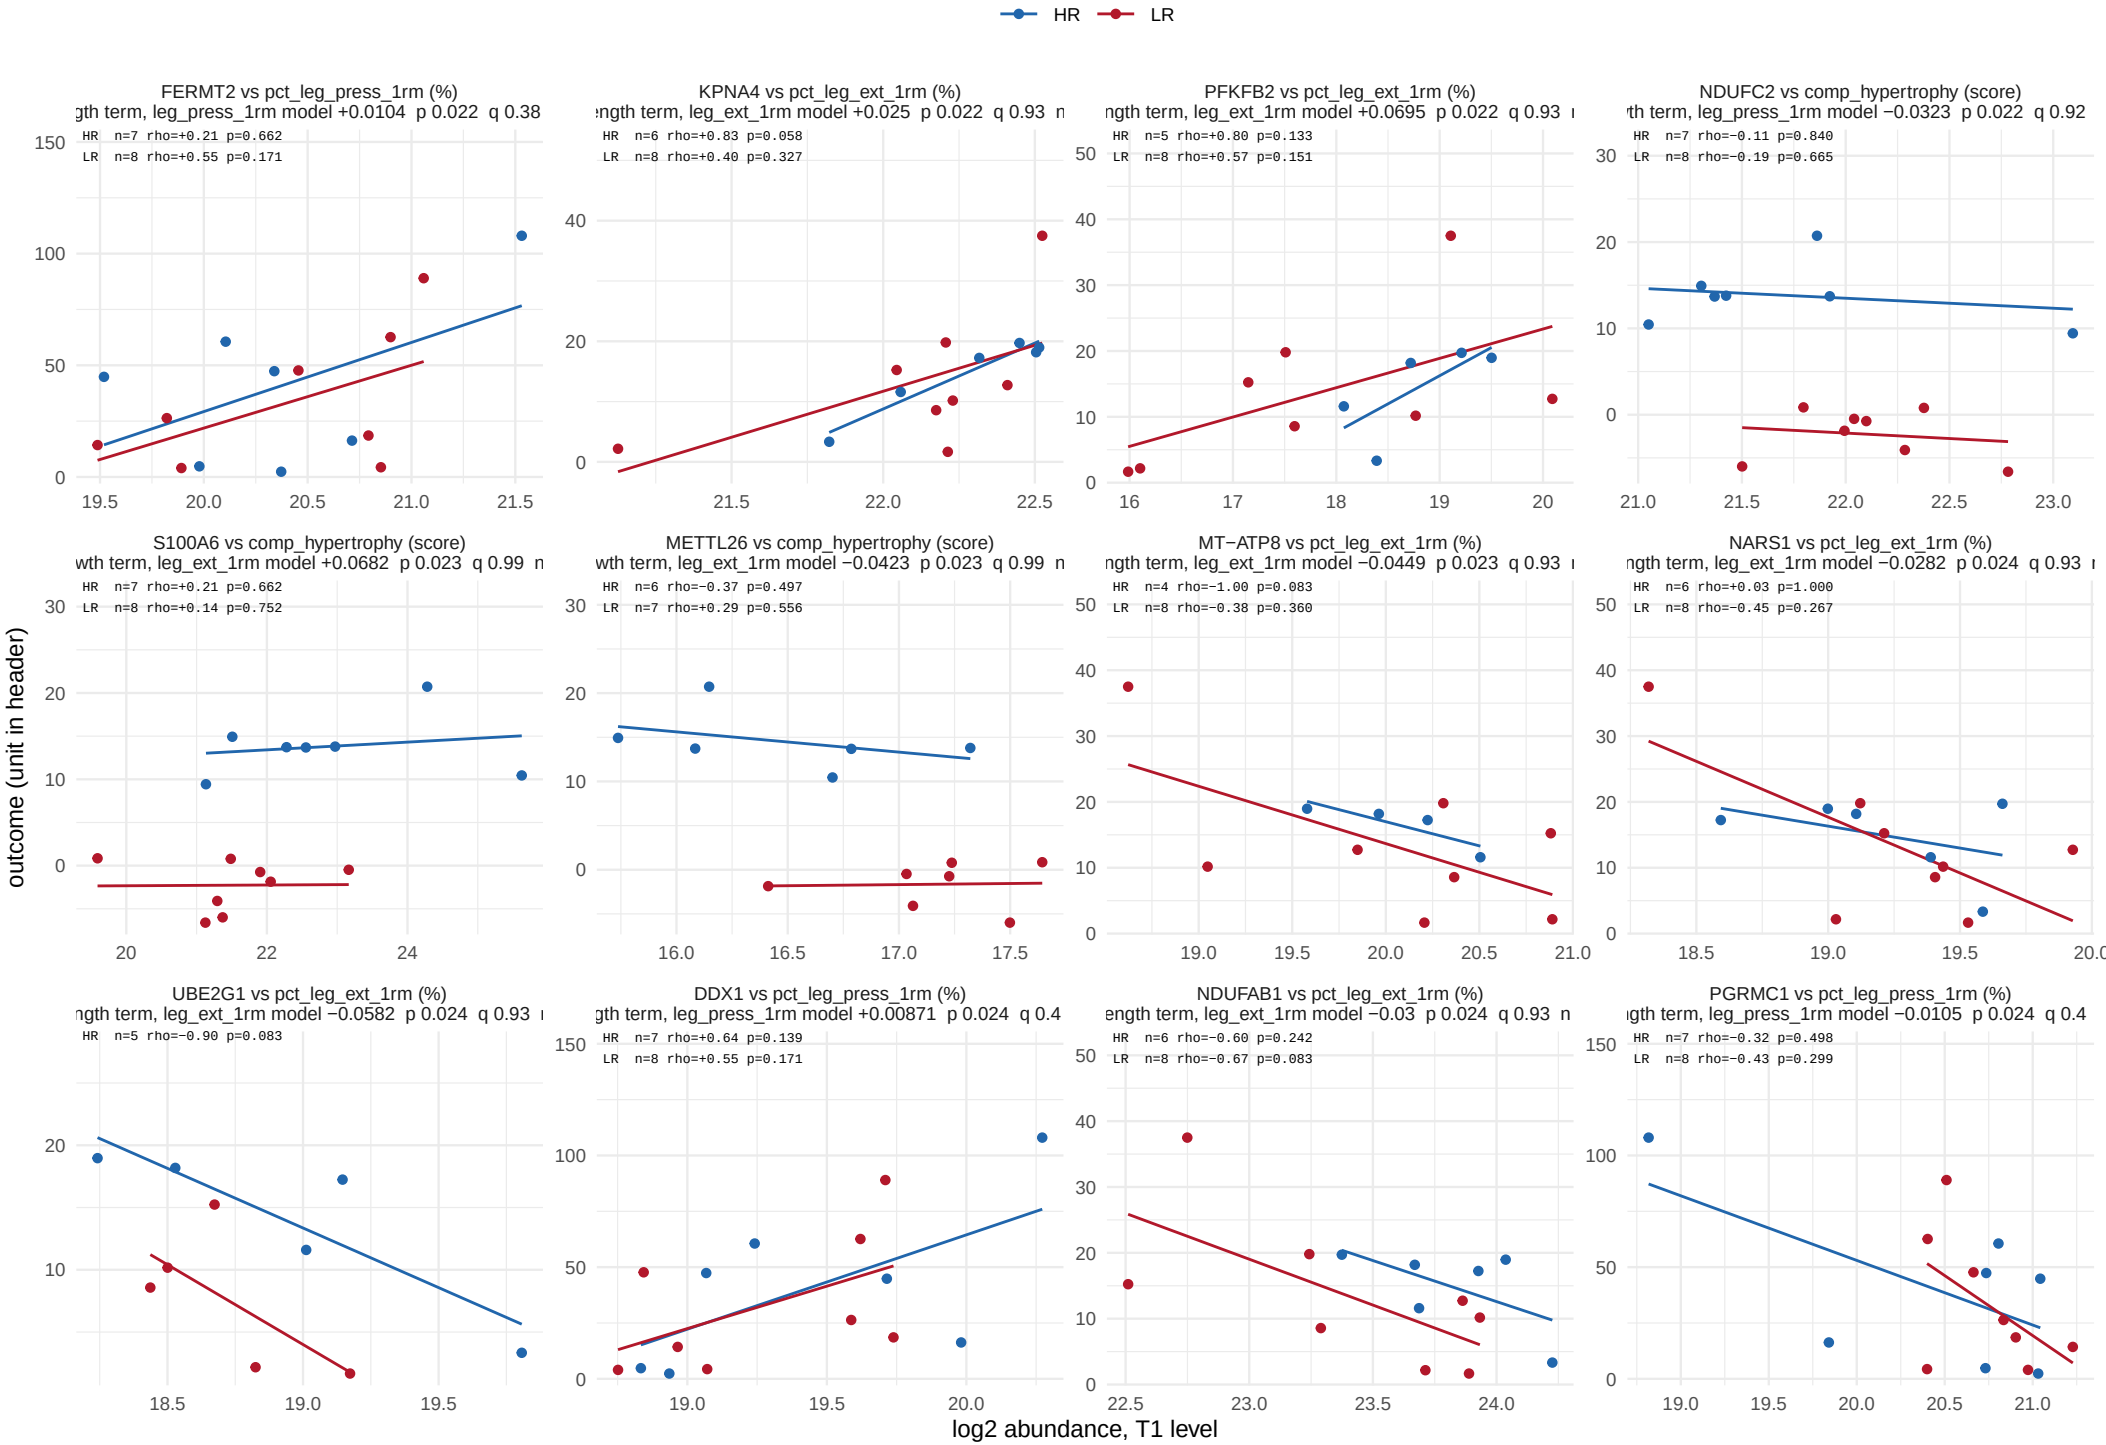

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.


Two predictor, baseline window

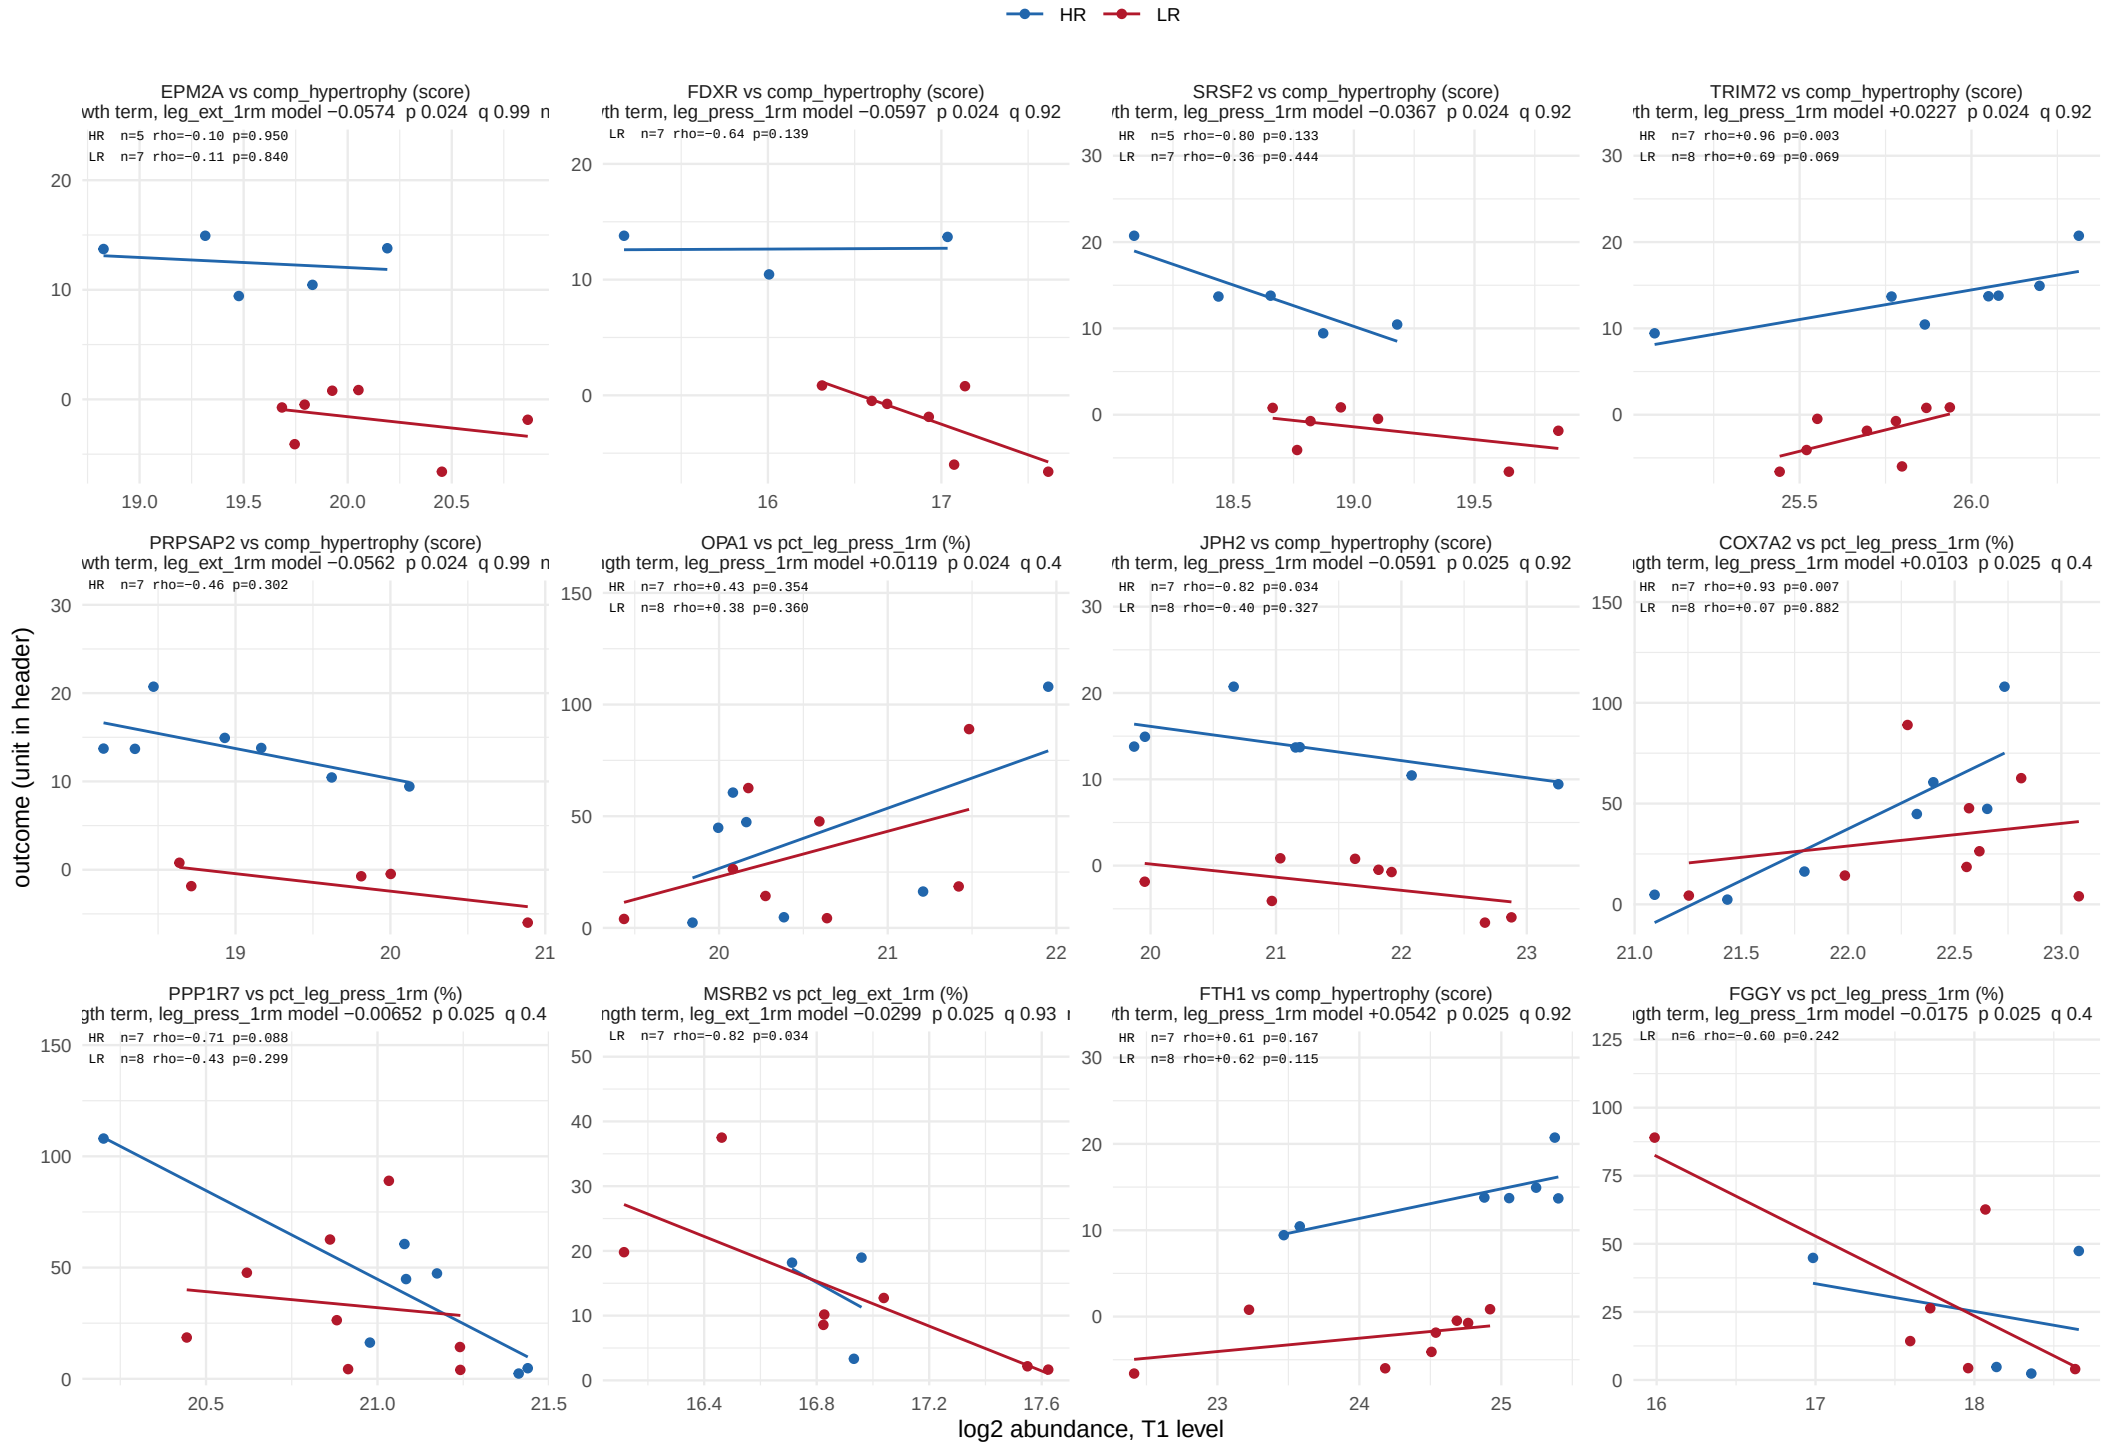

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.


Two predictor, baseline window

378 of 6218 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 18 of 32.

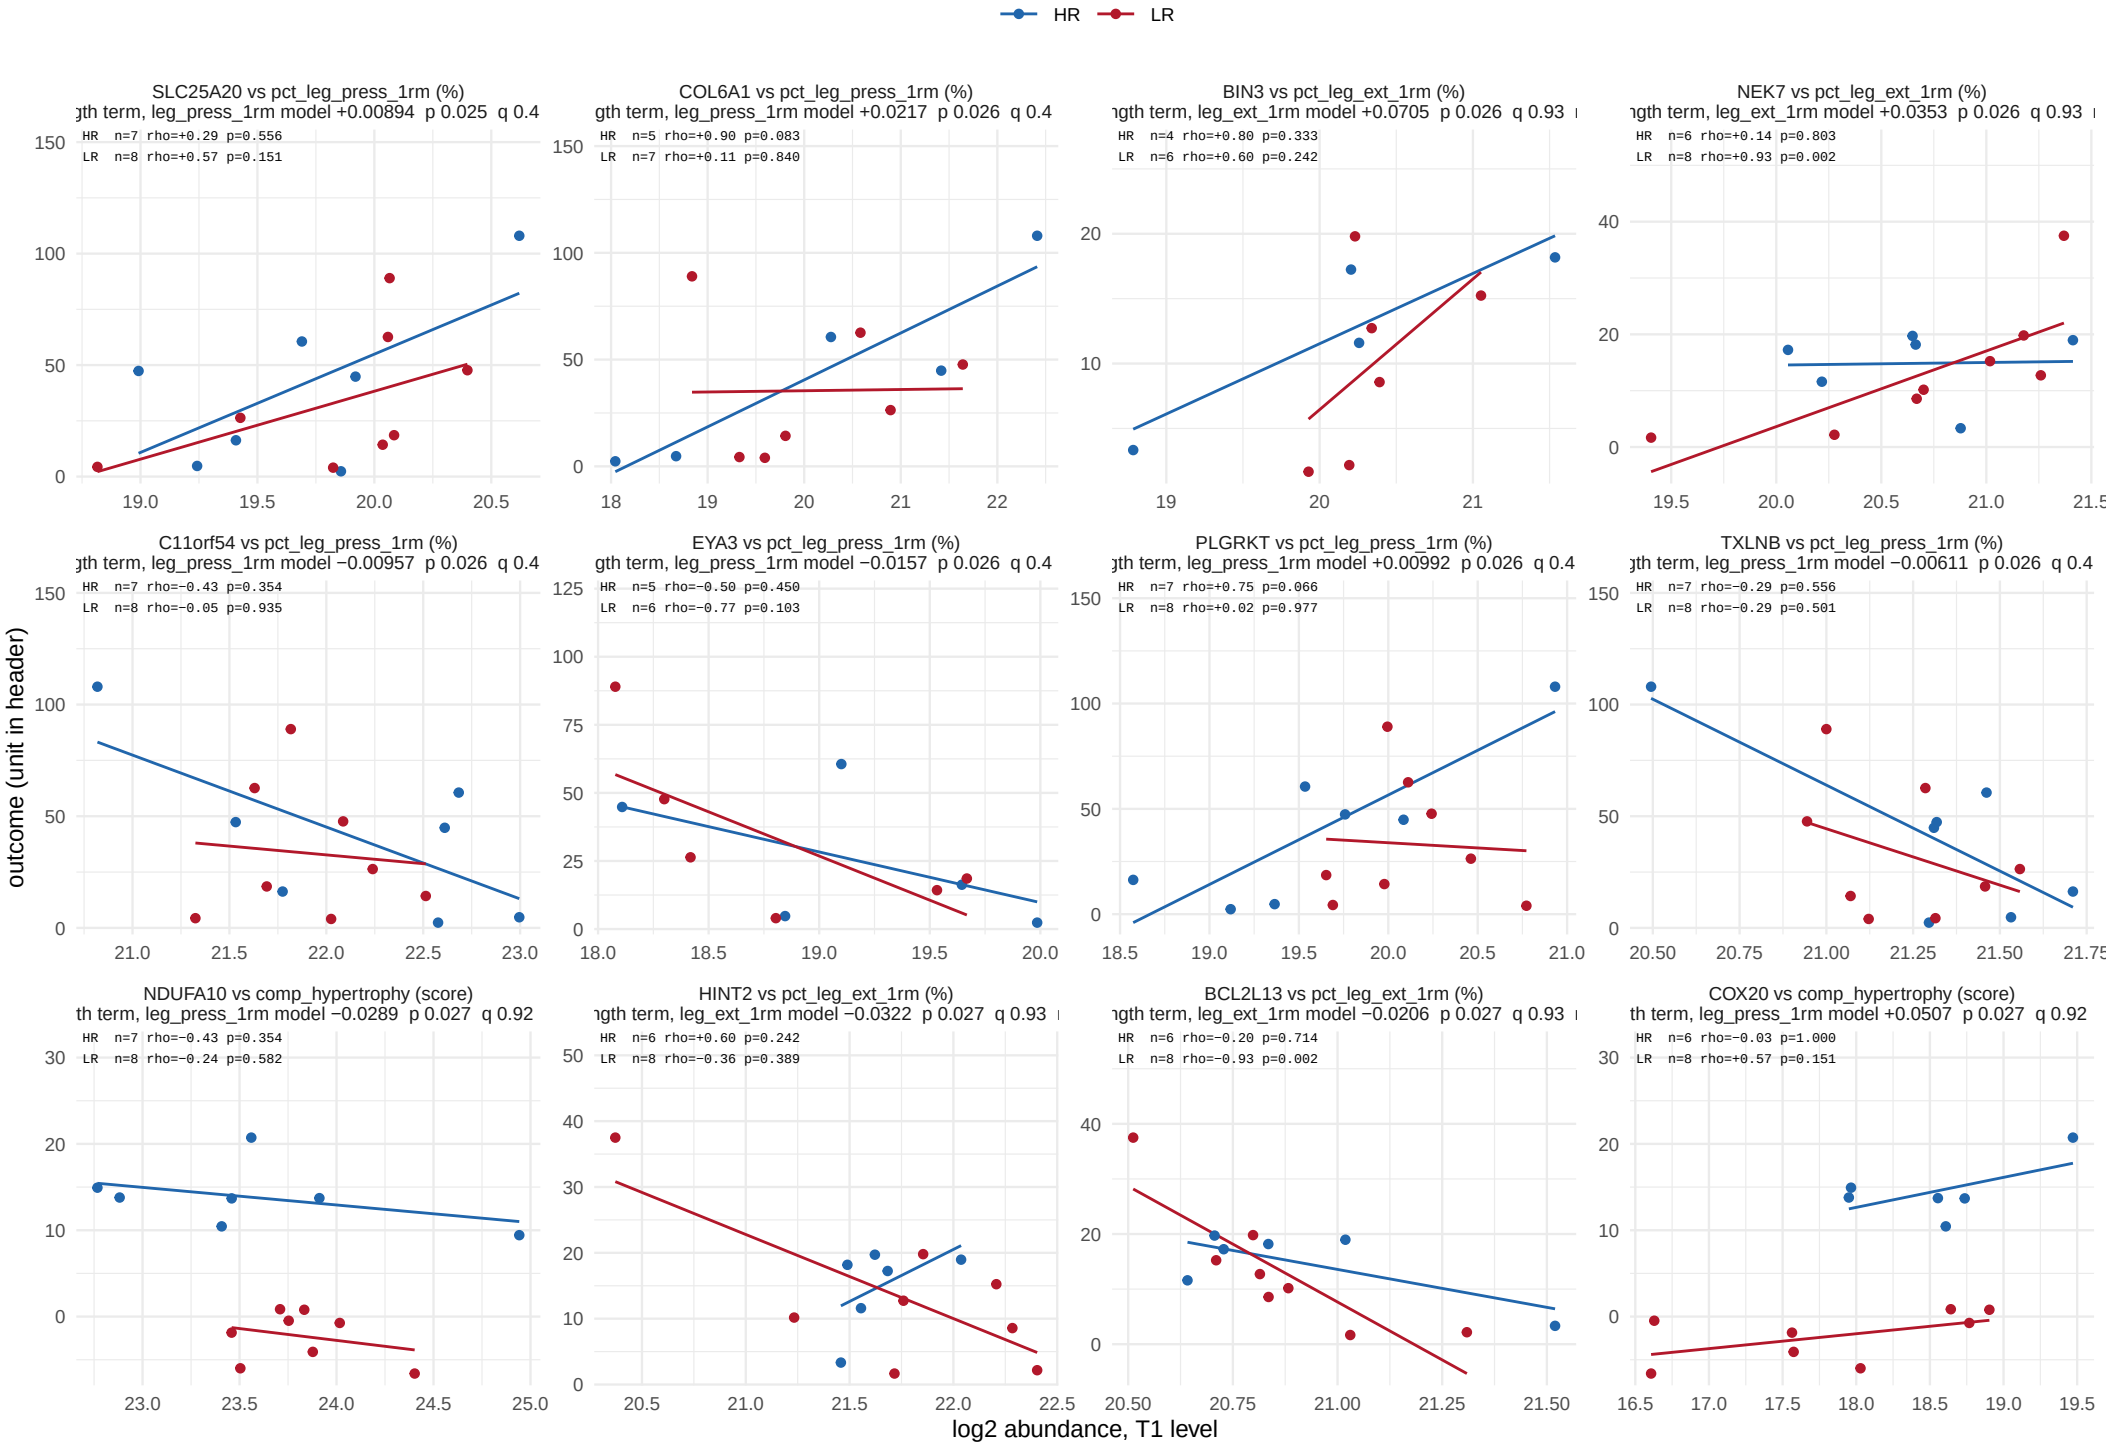


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, baseline window

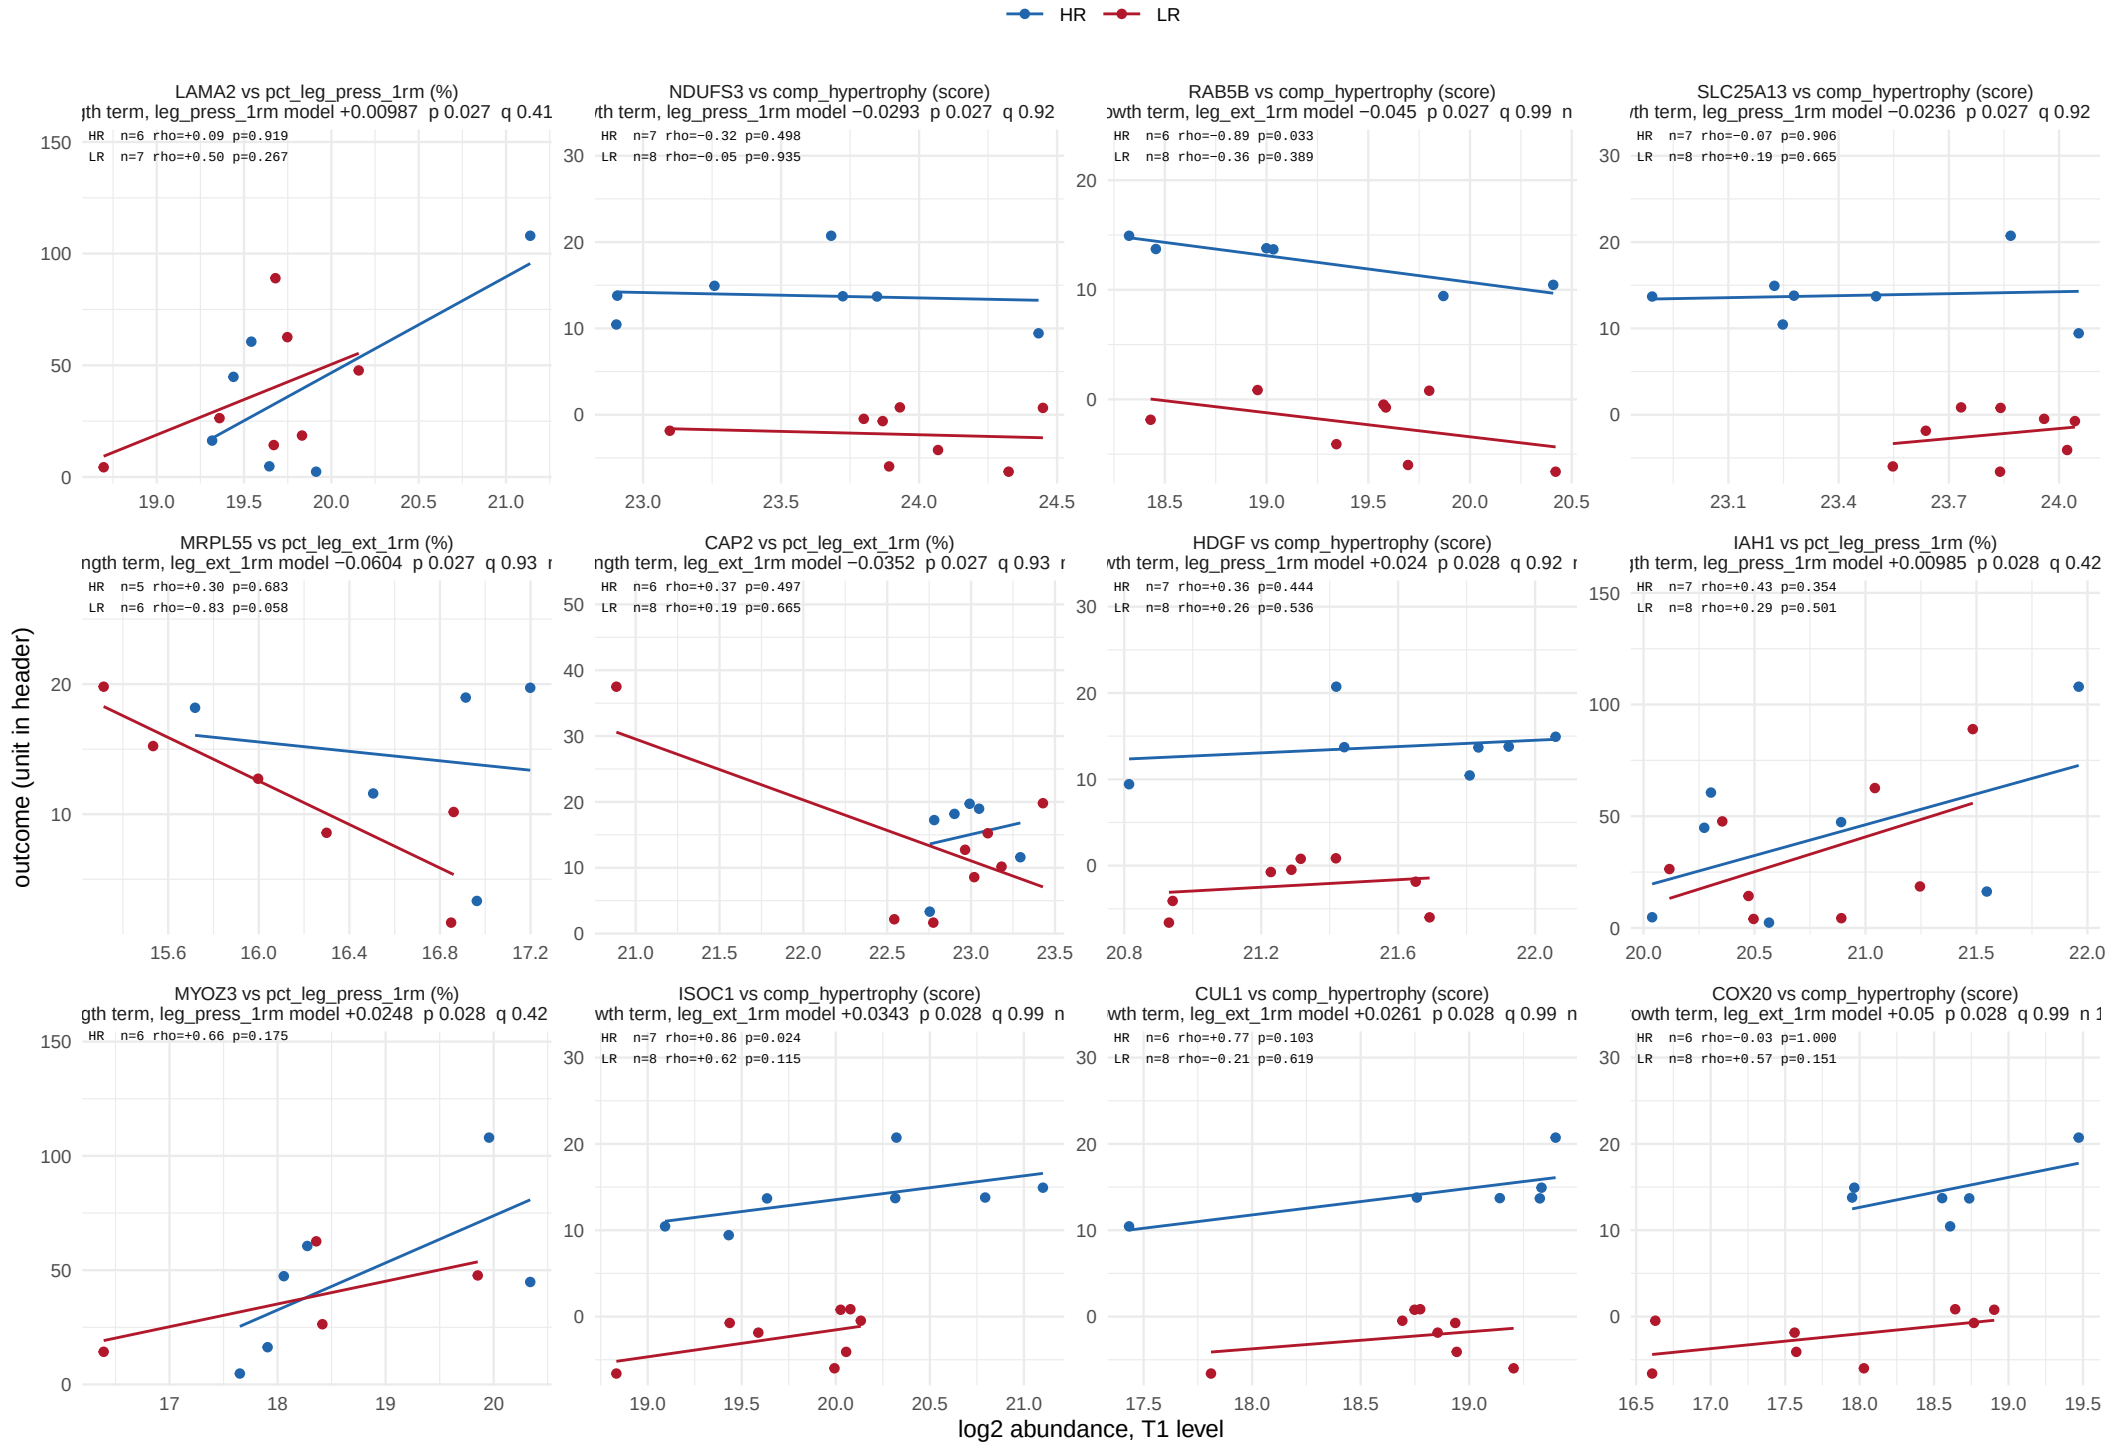


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, baseline window

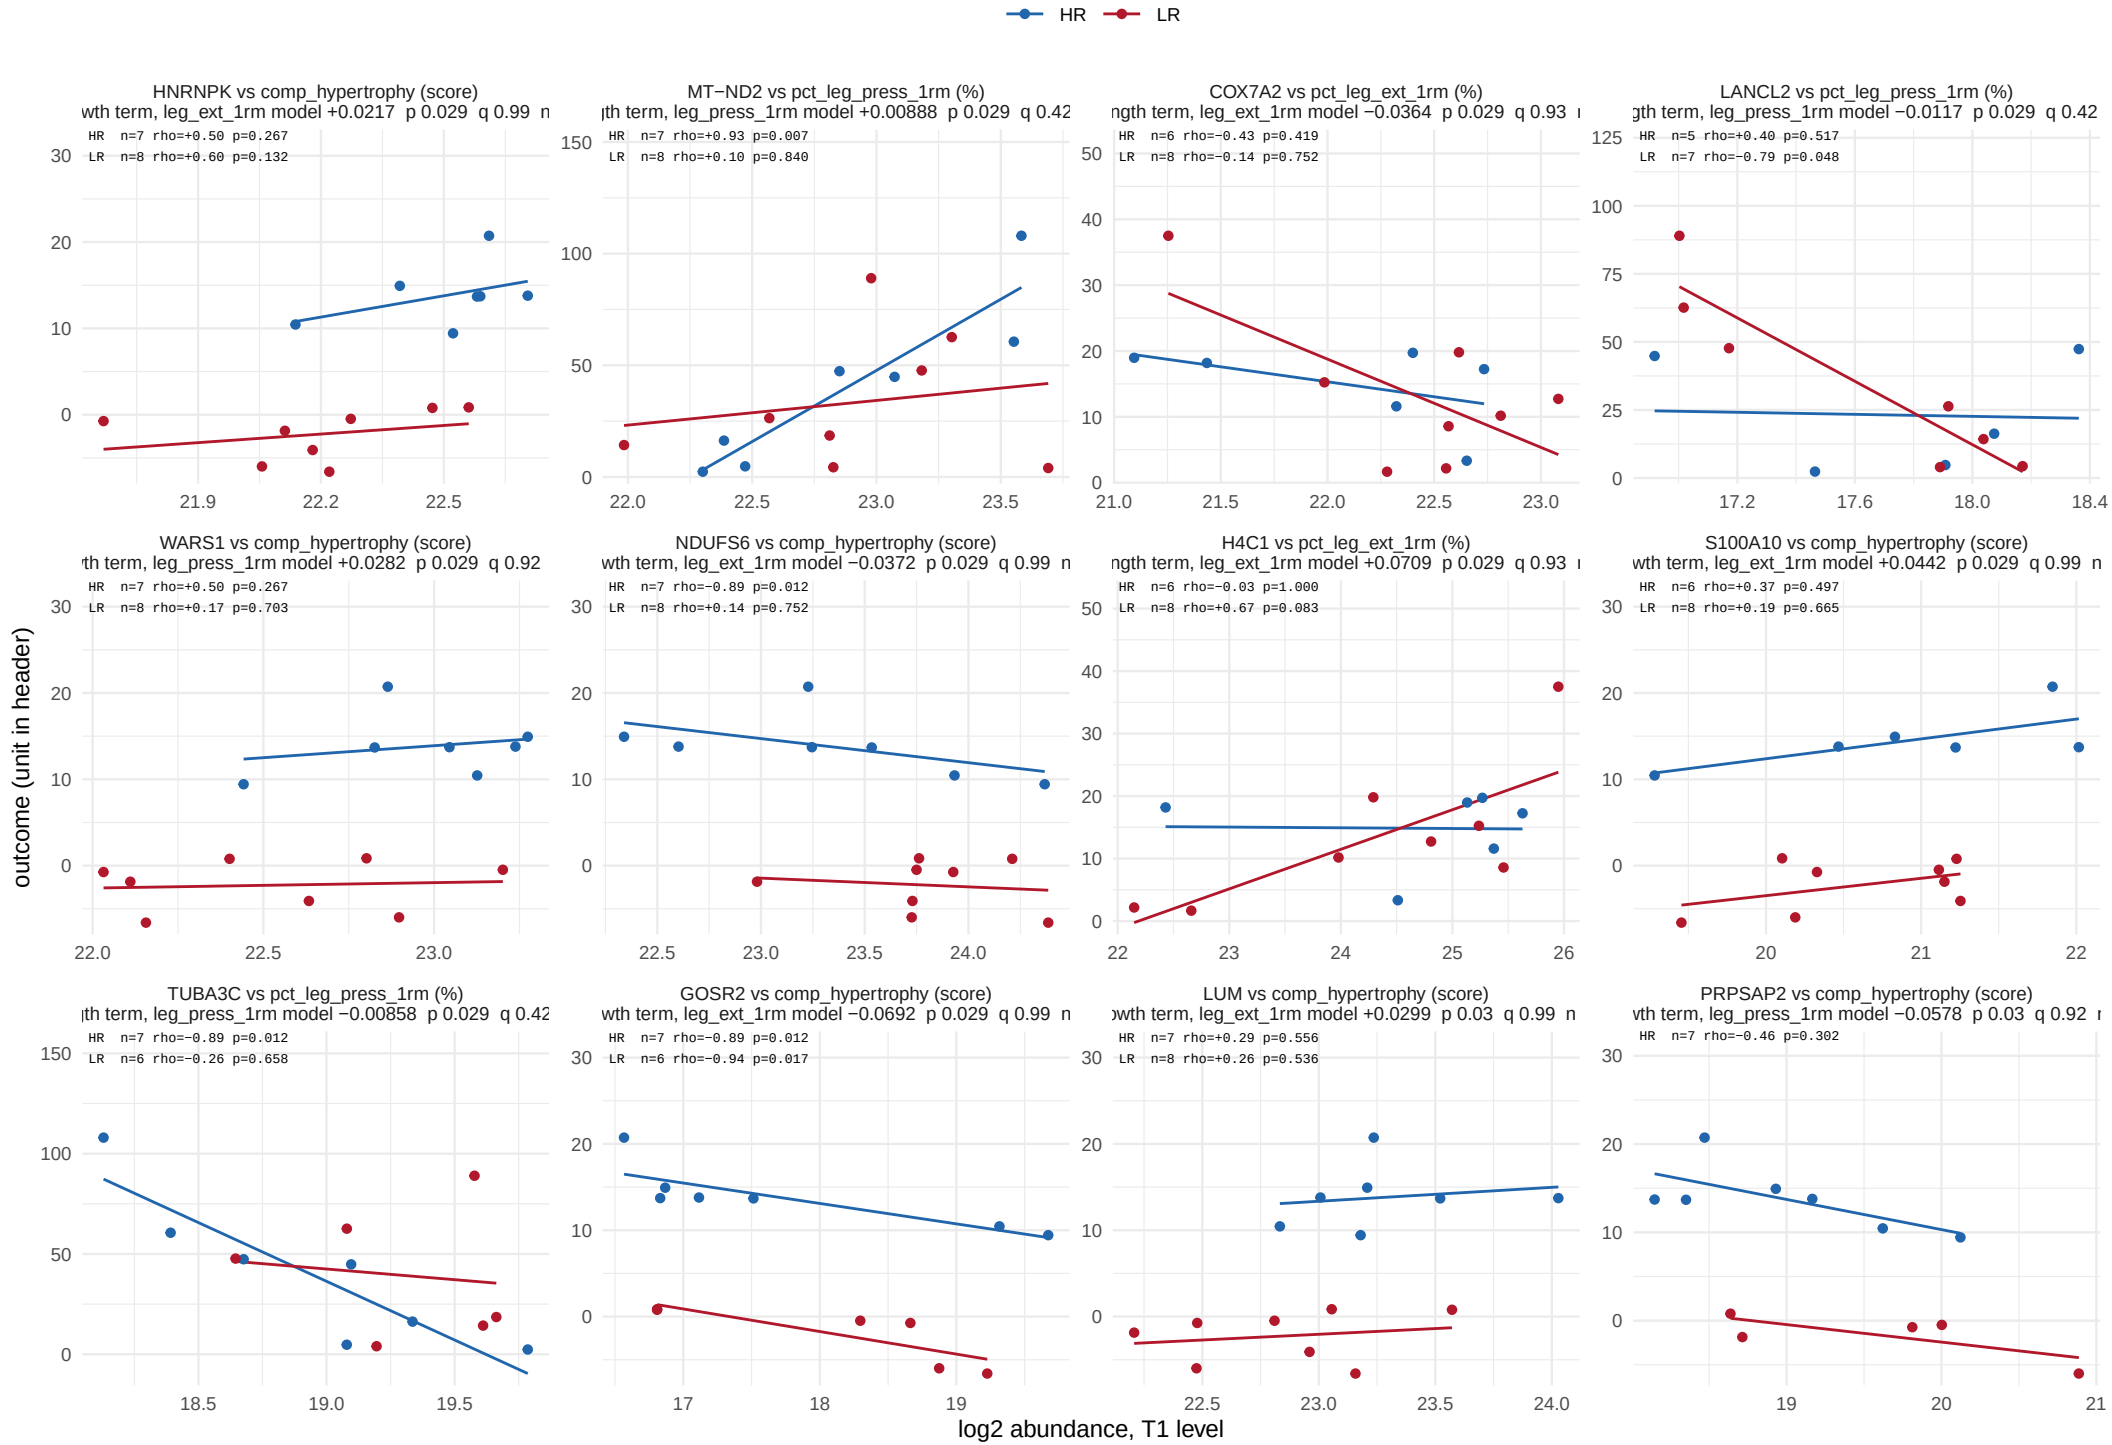


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, baseline window

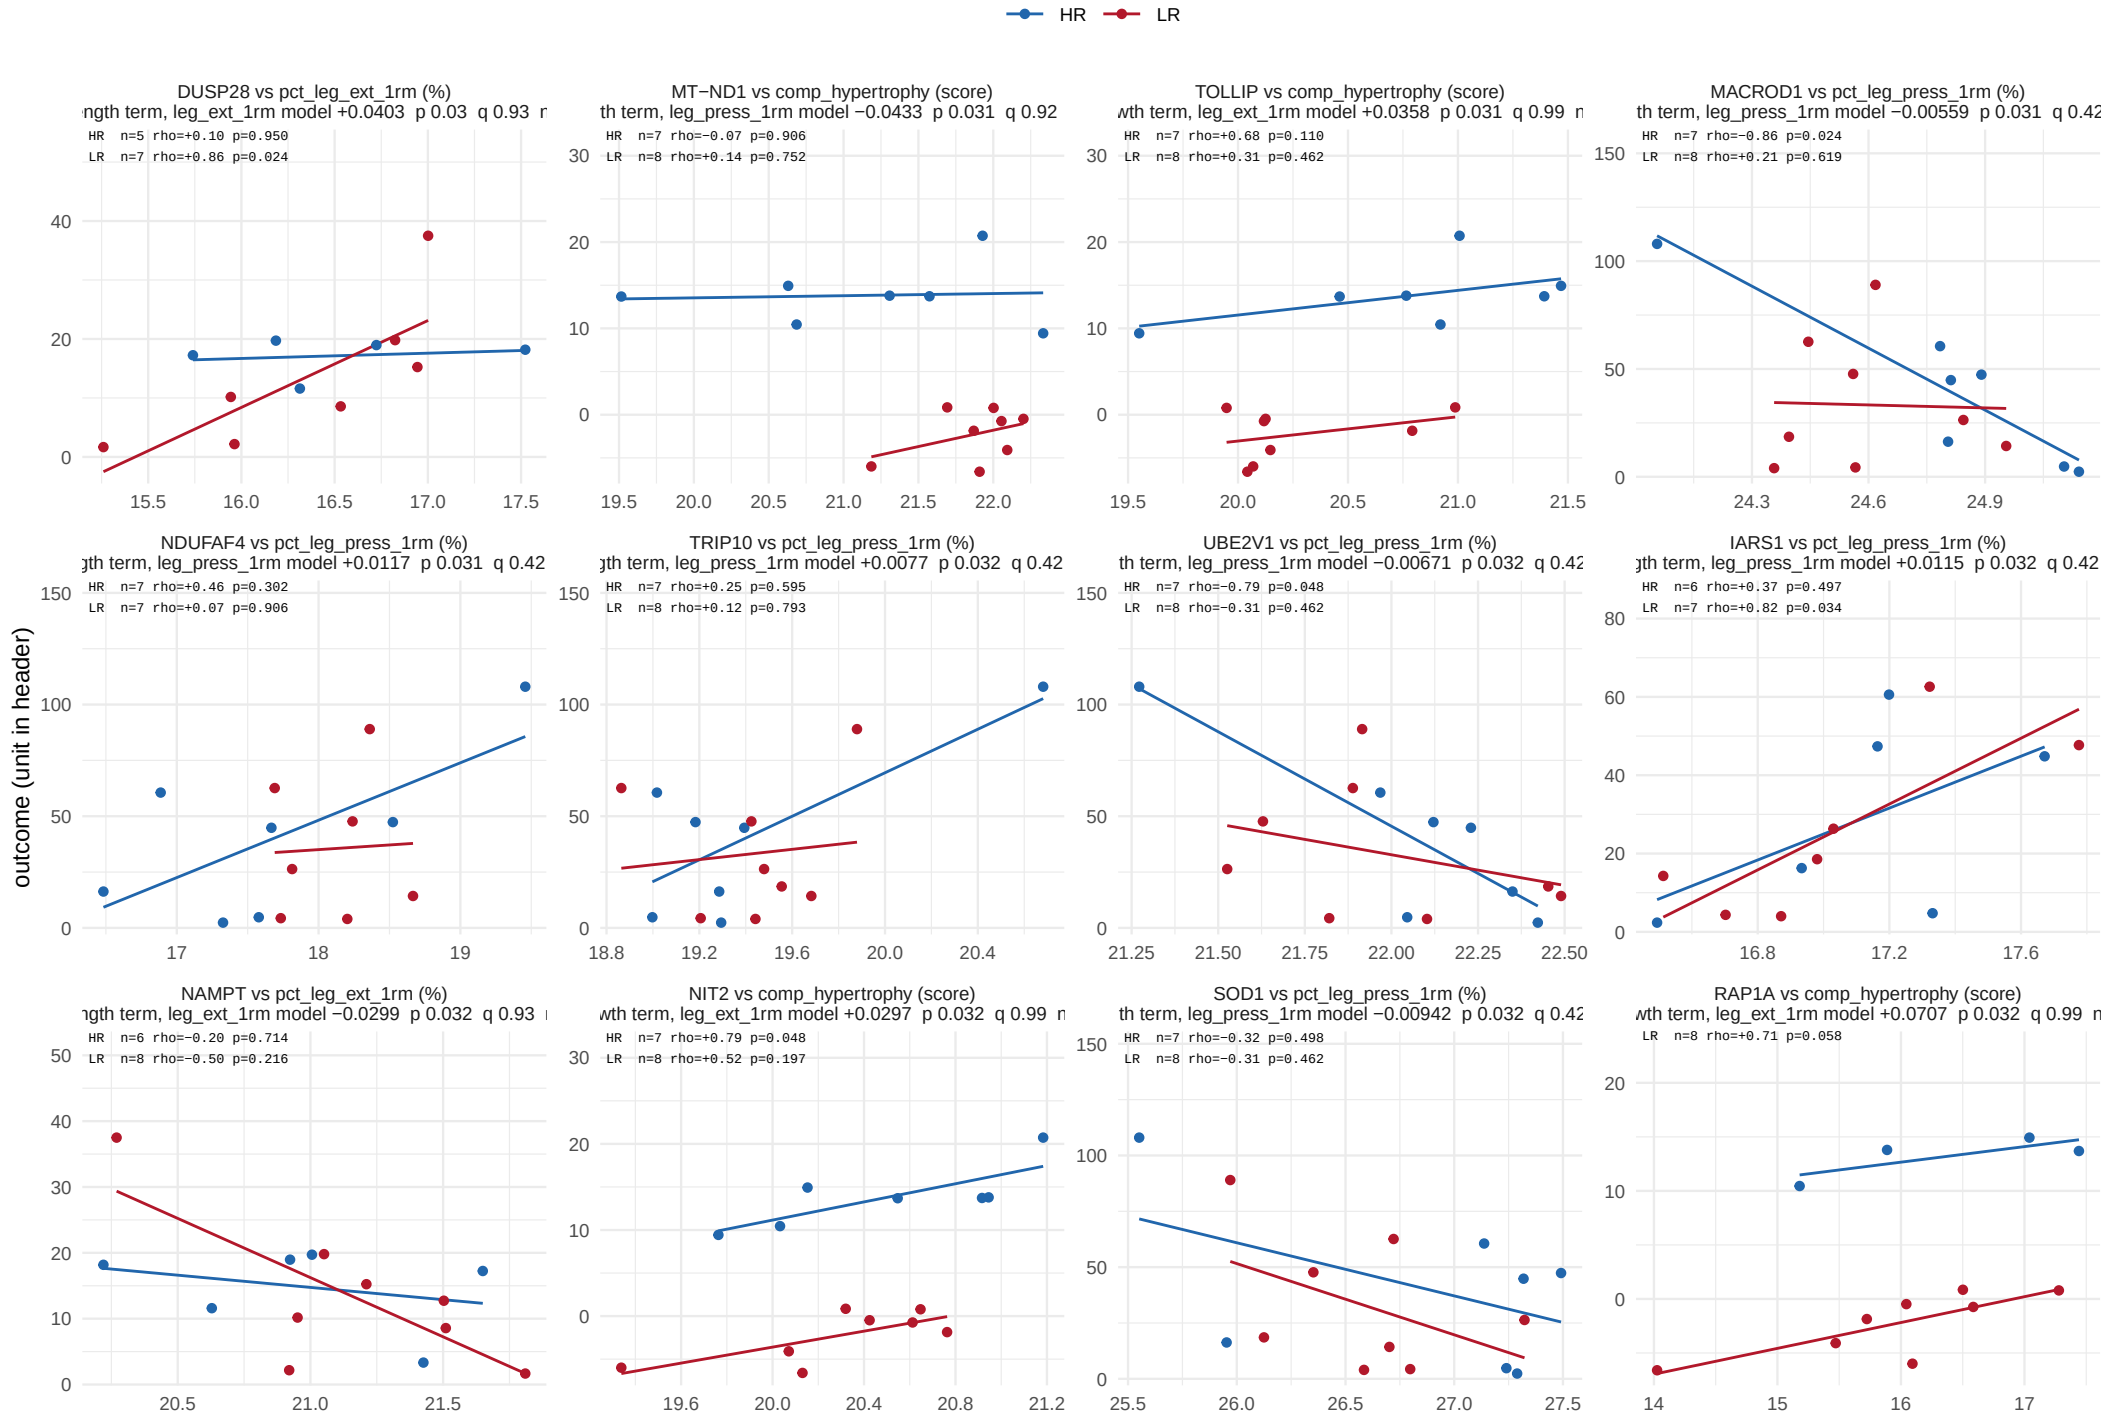


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, baseline window

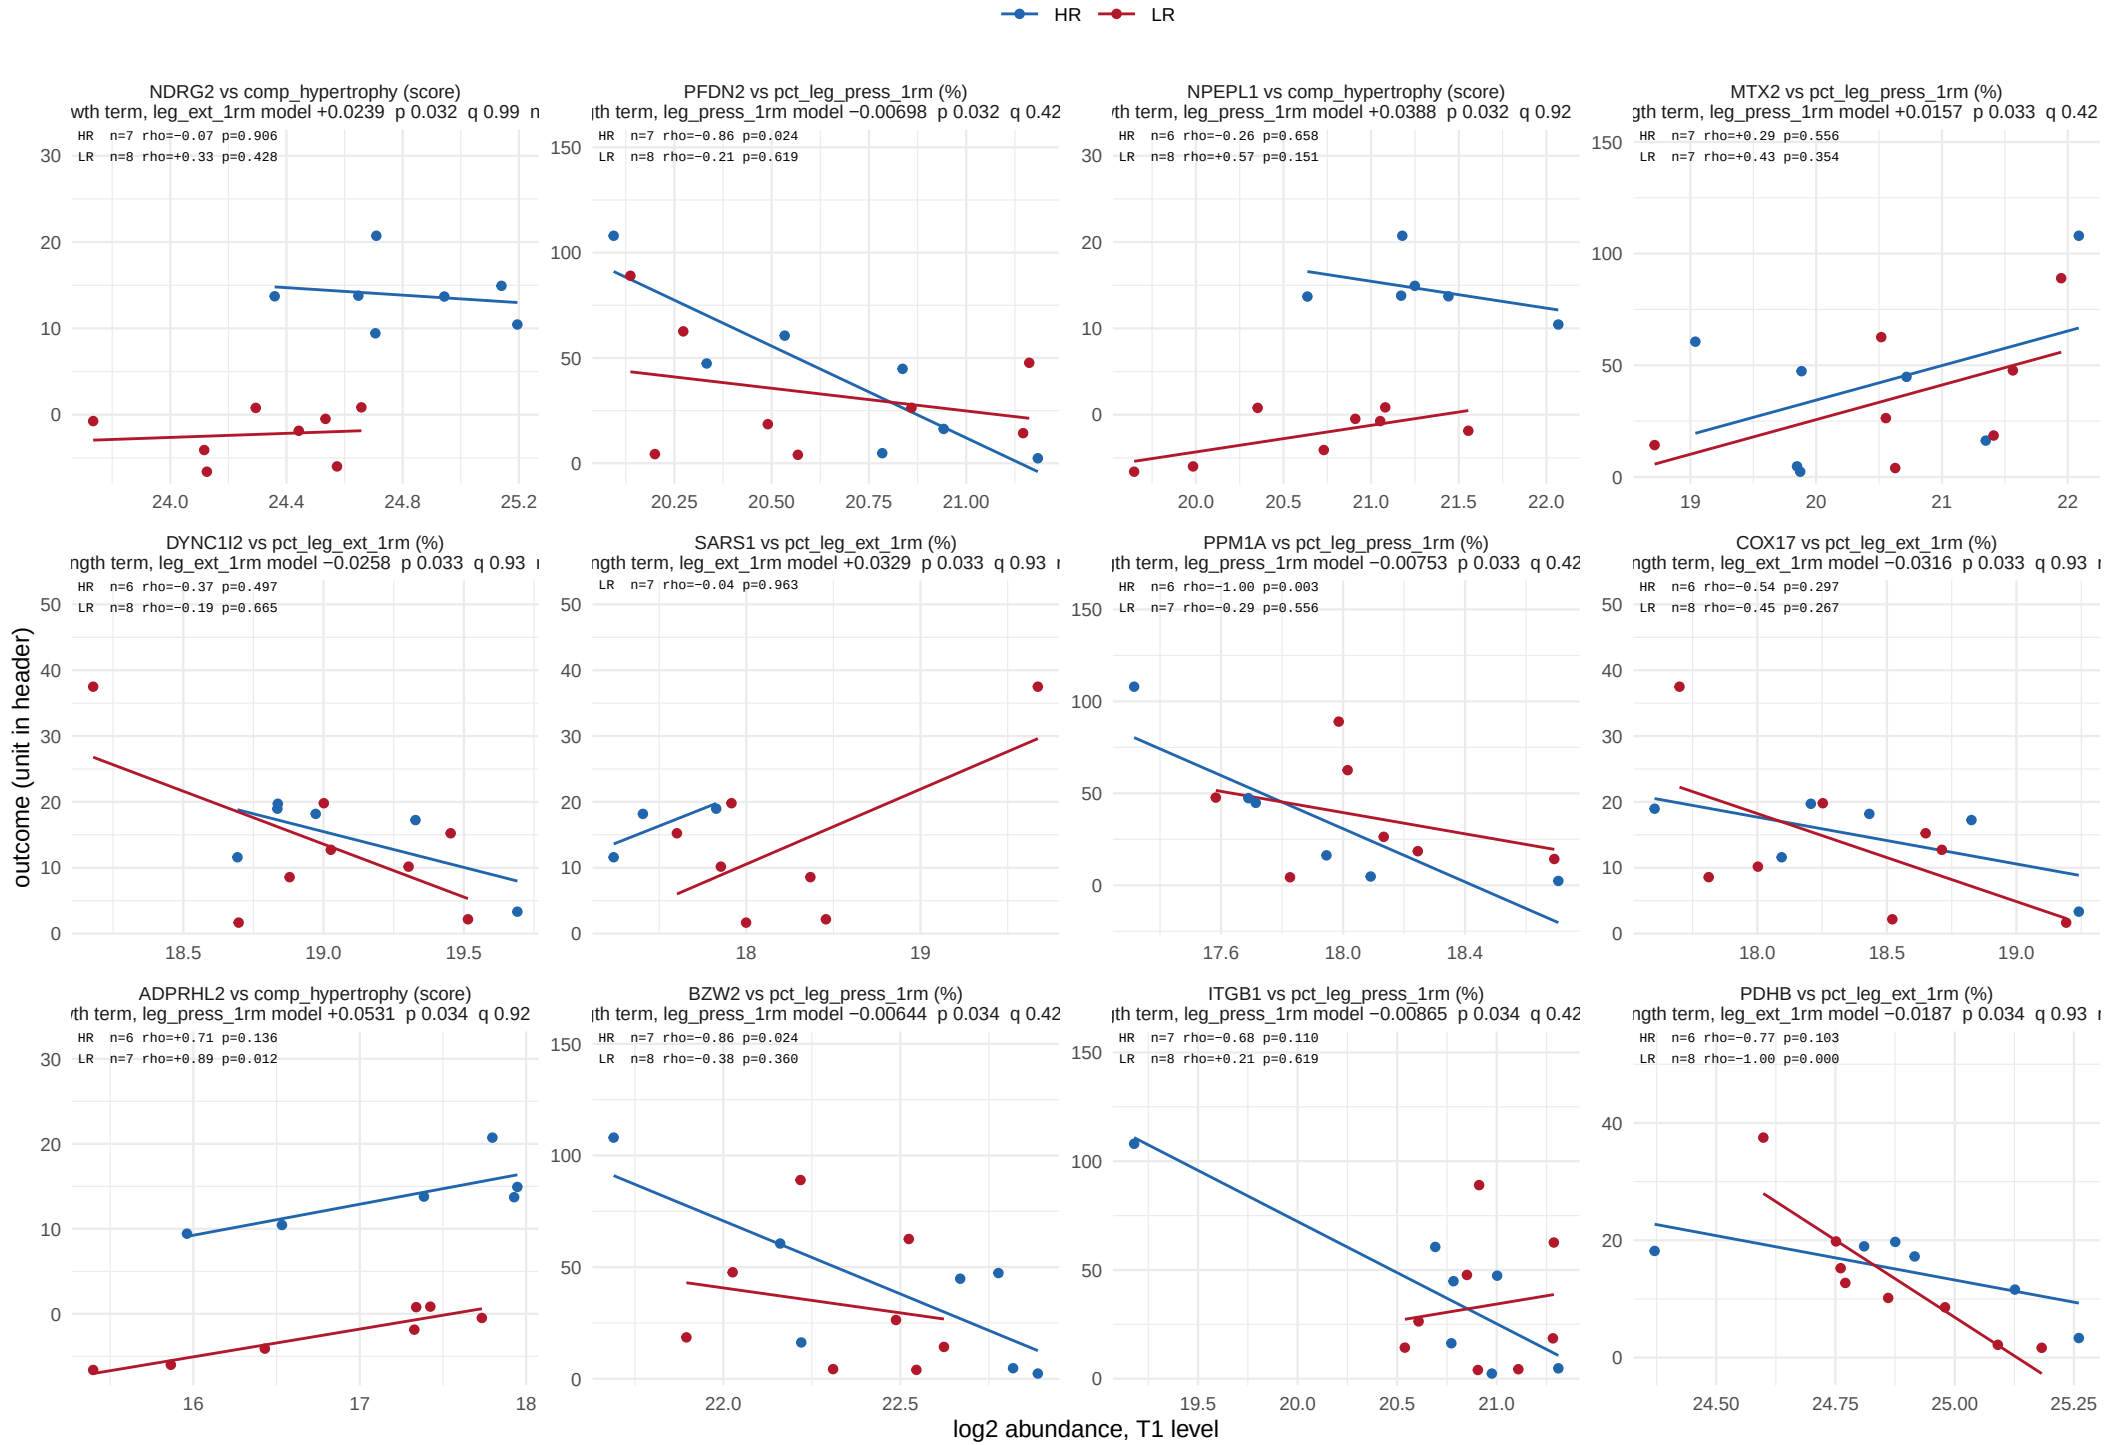


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, baseline window

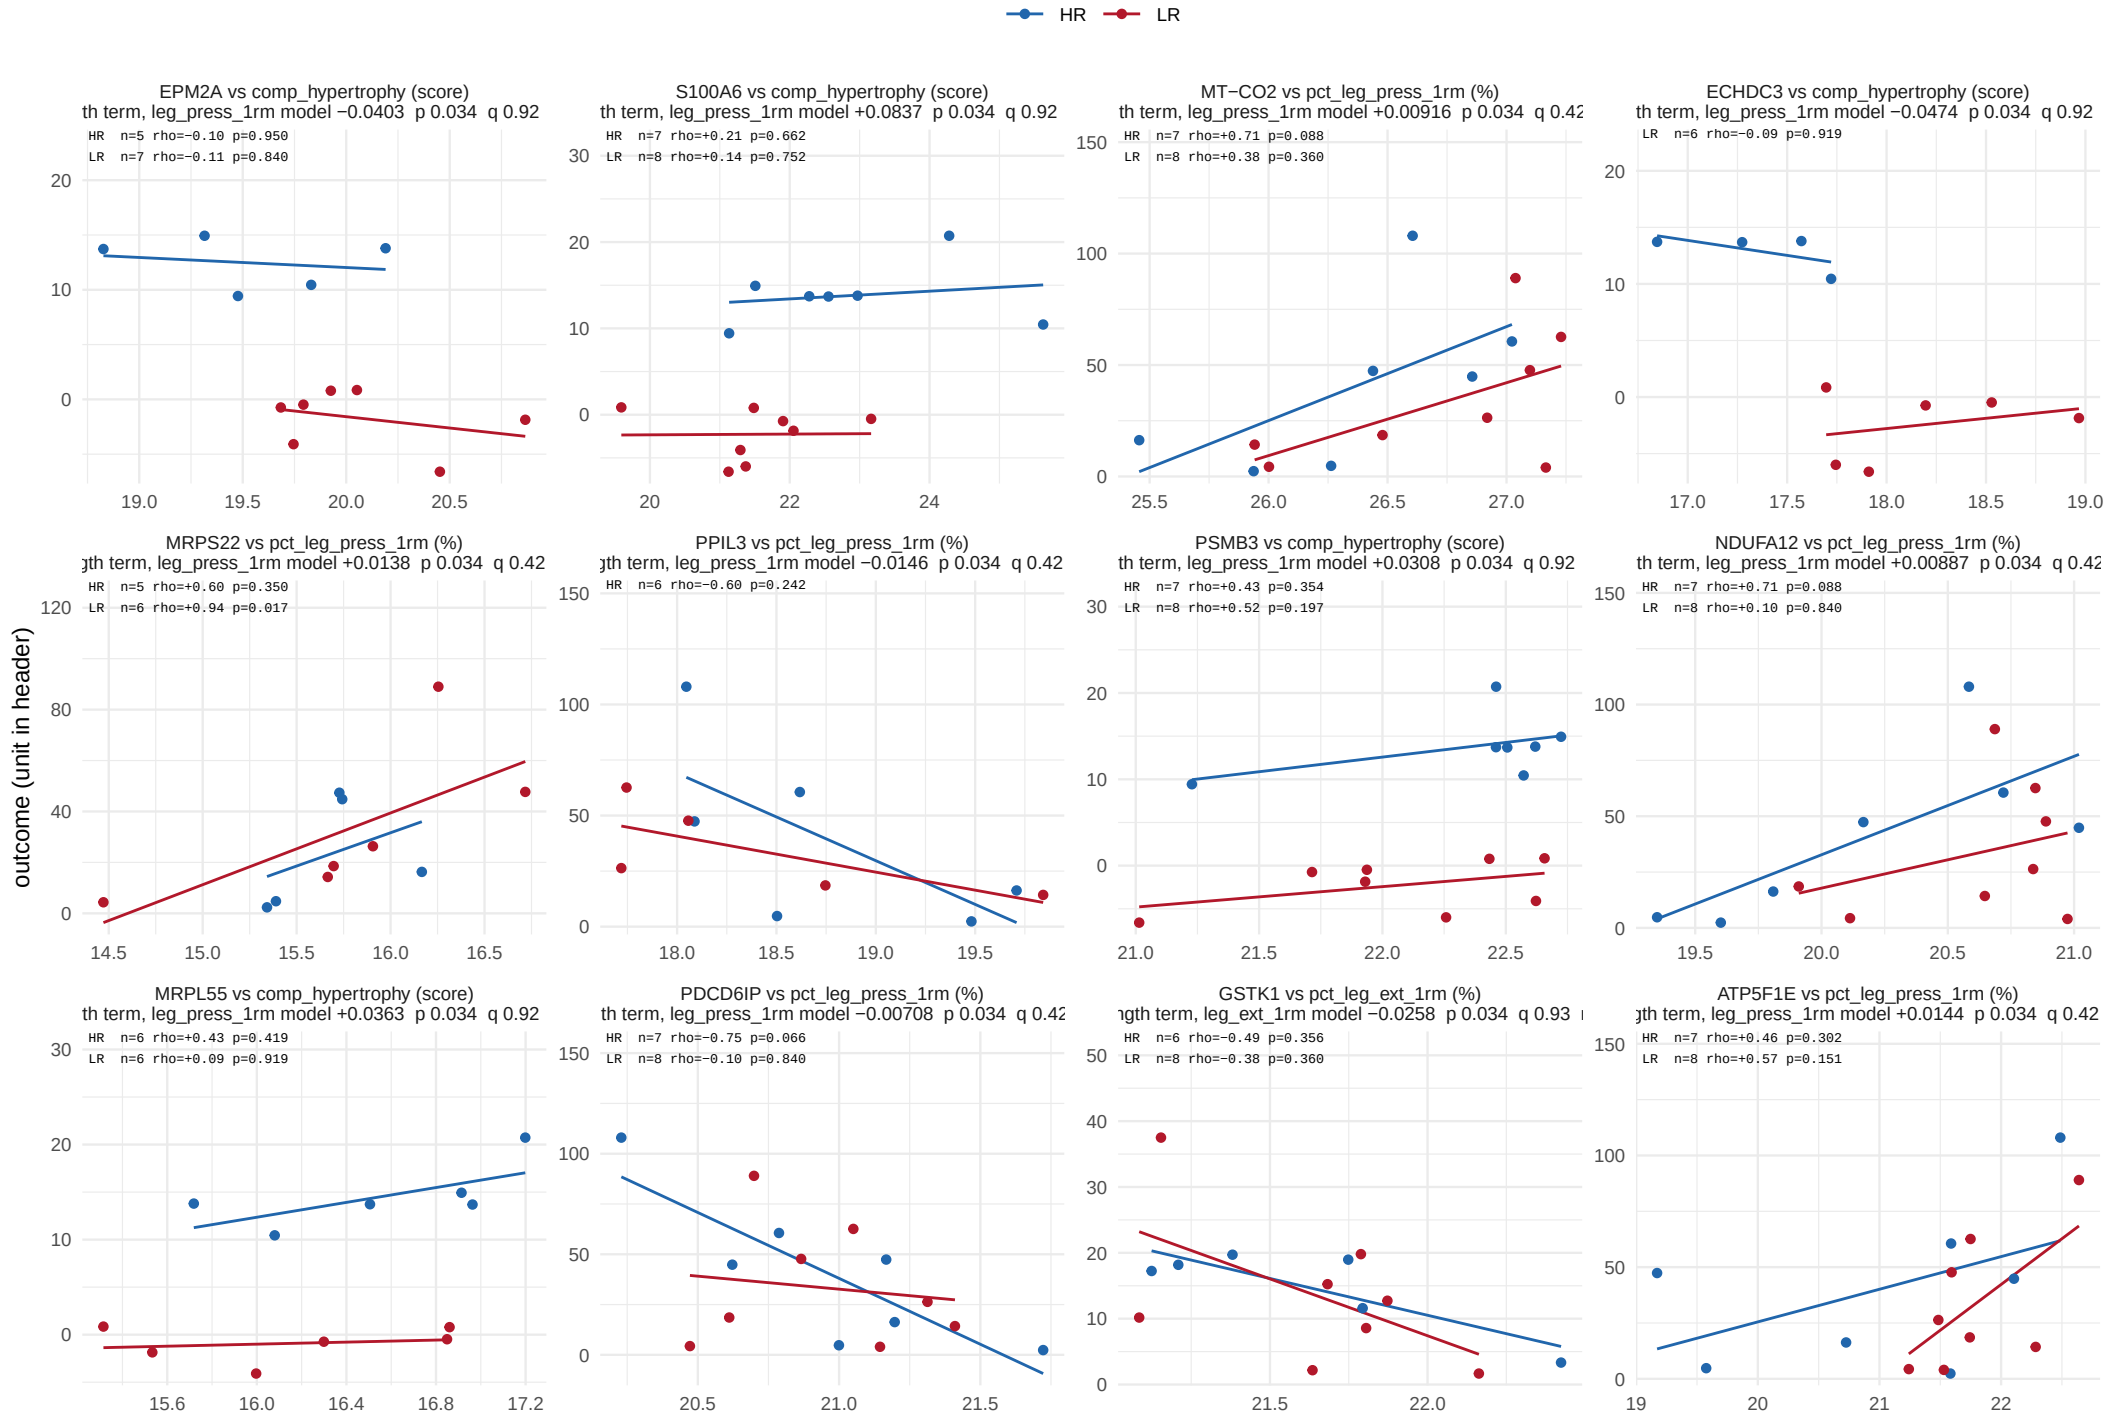


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, baseline window

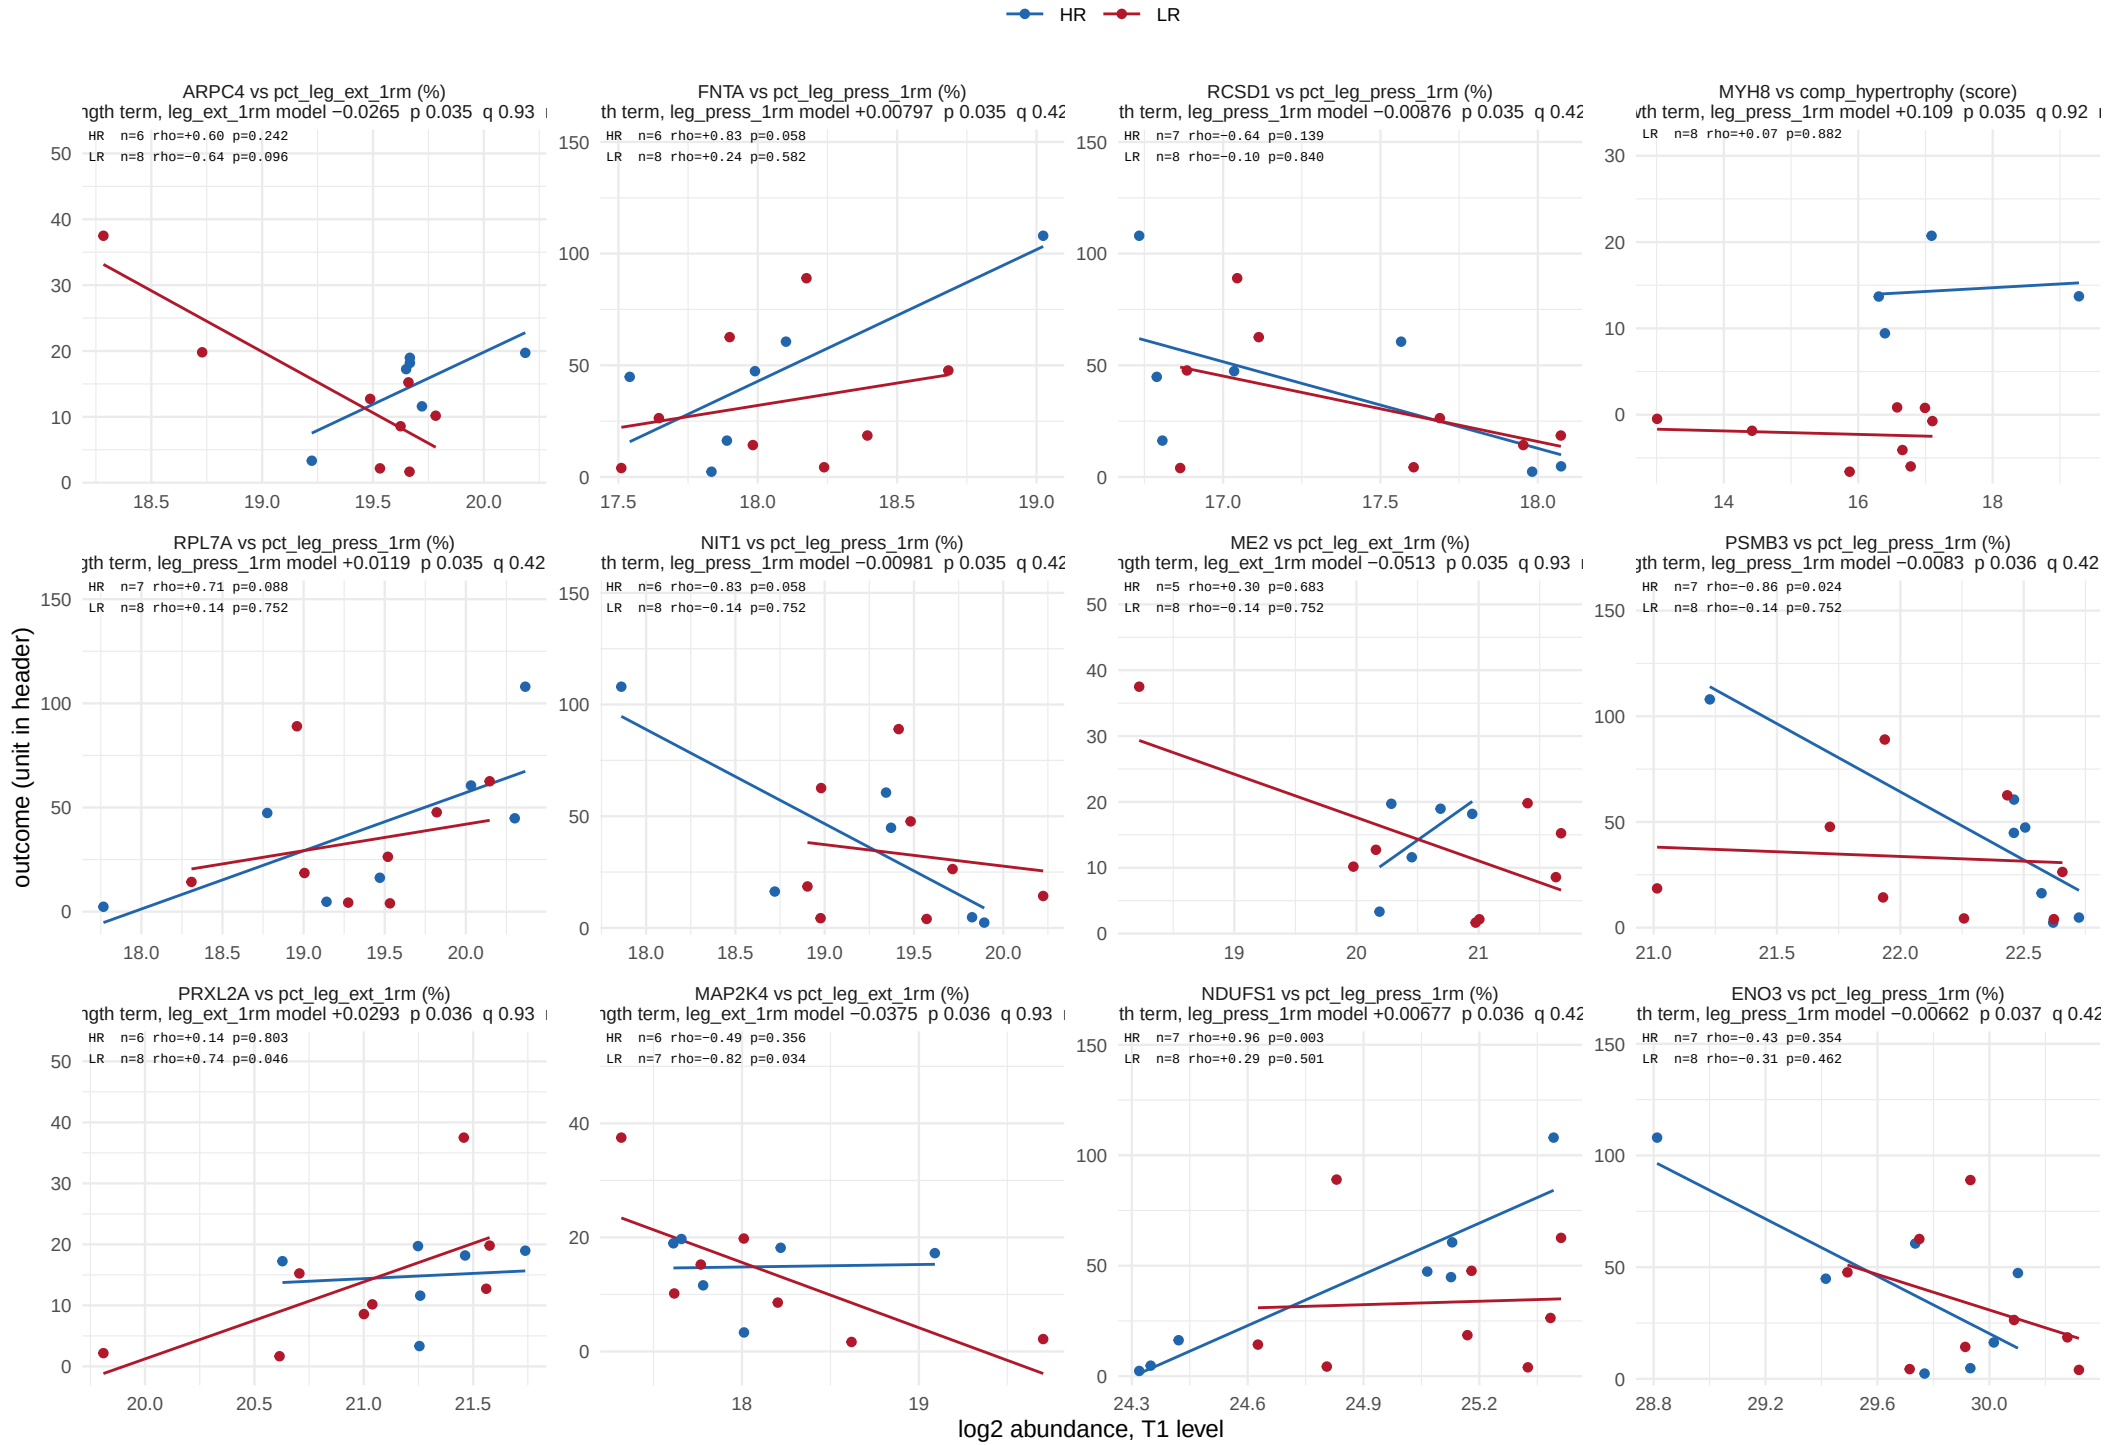


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, baseline window

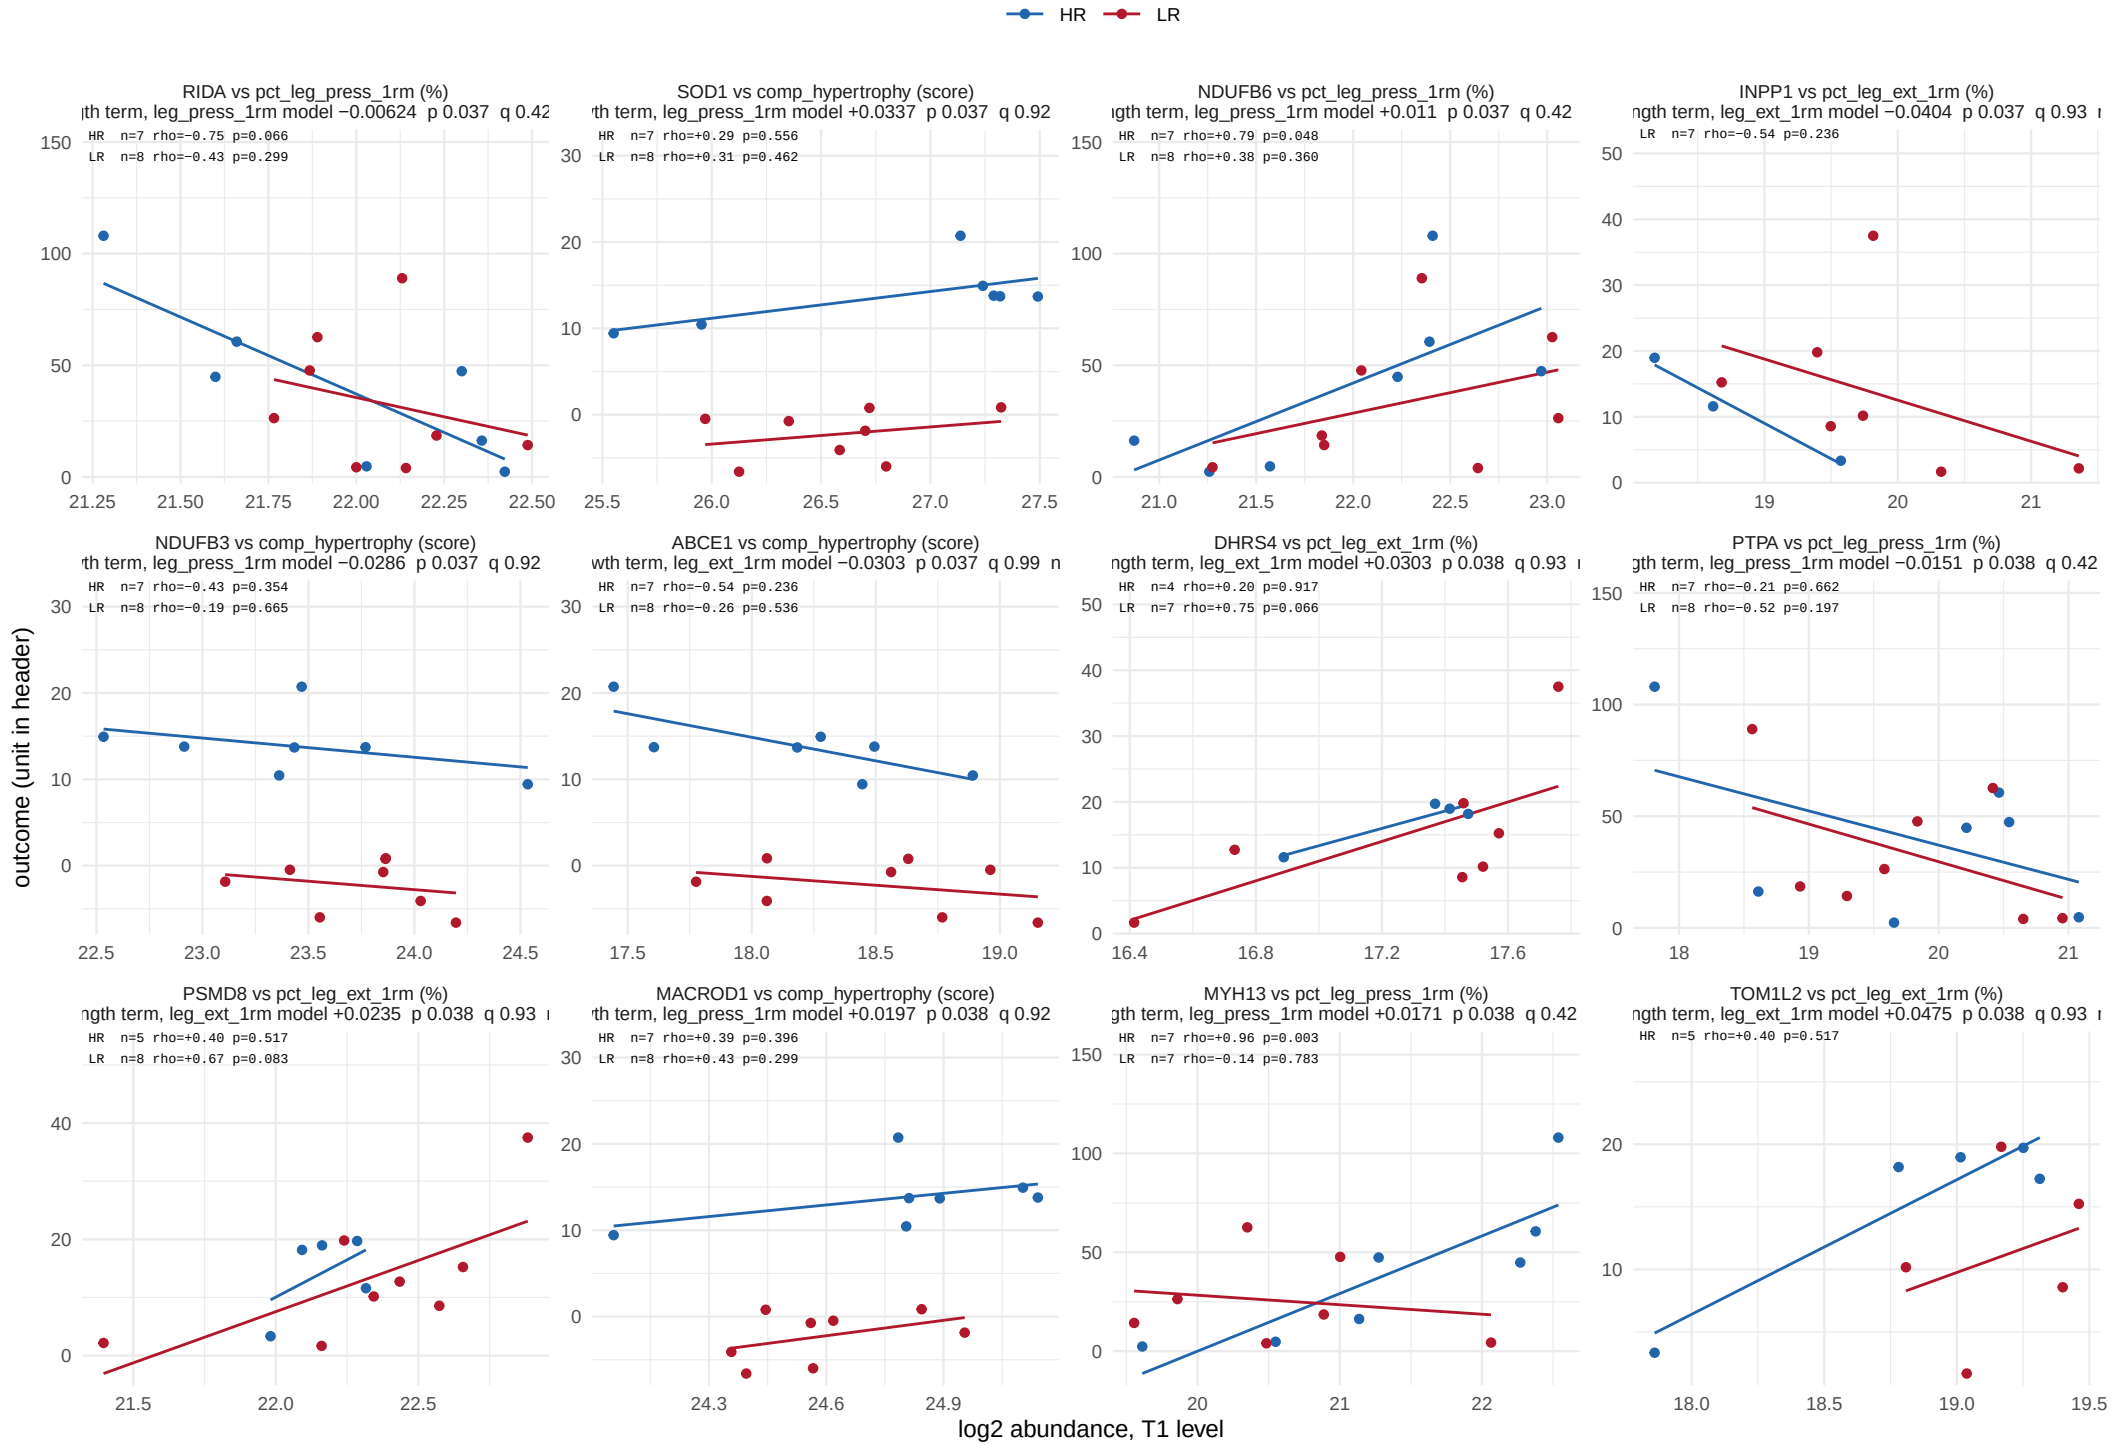


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, baseline window

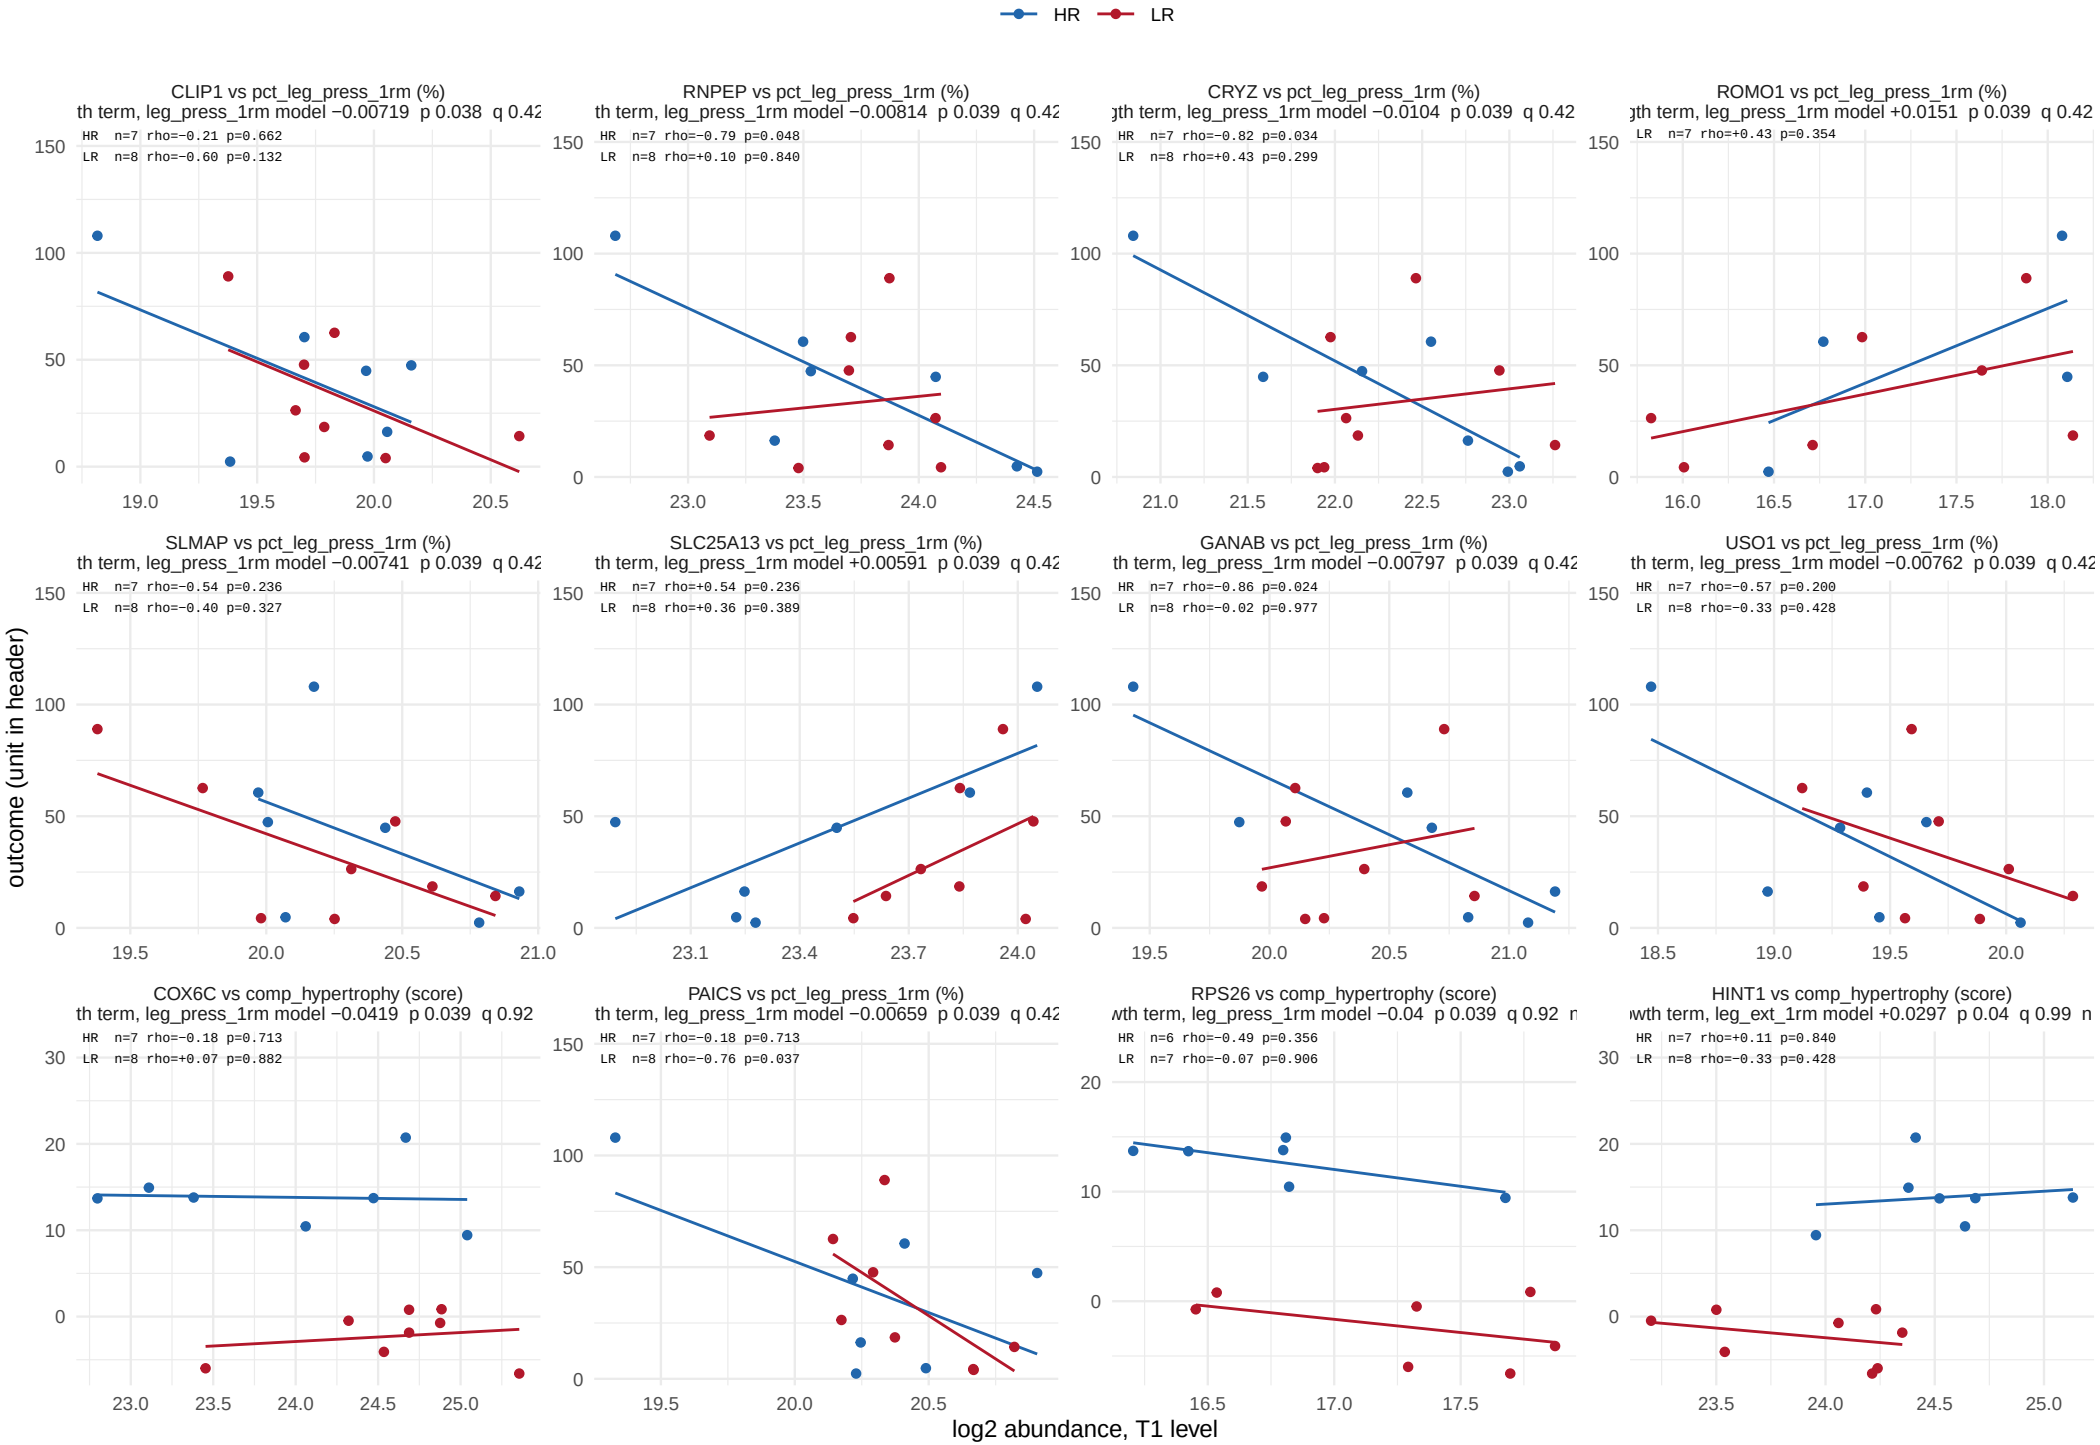


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, baseline window

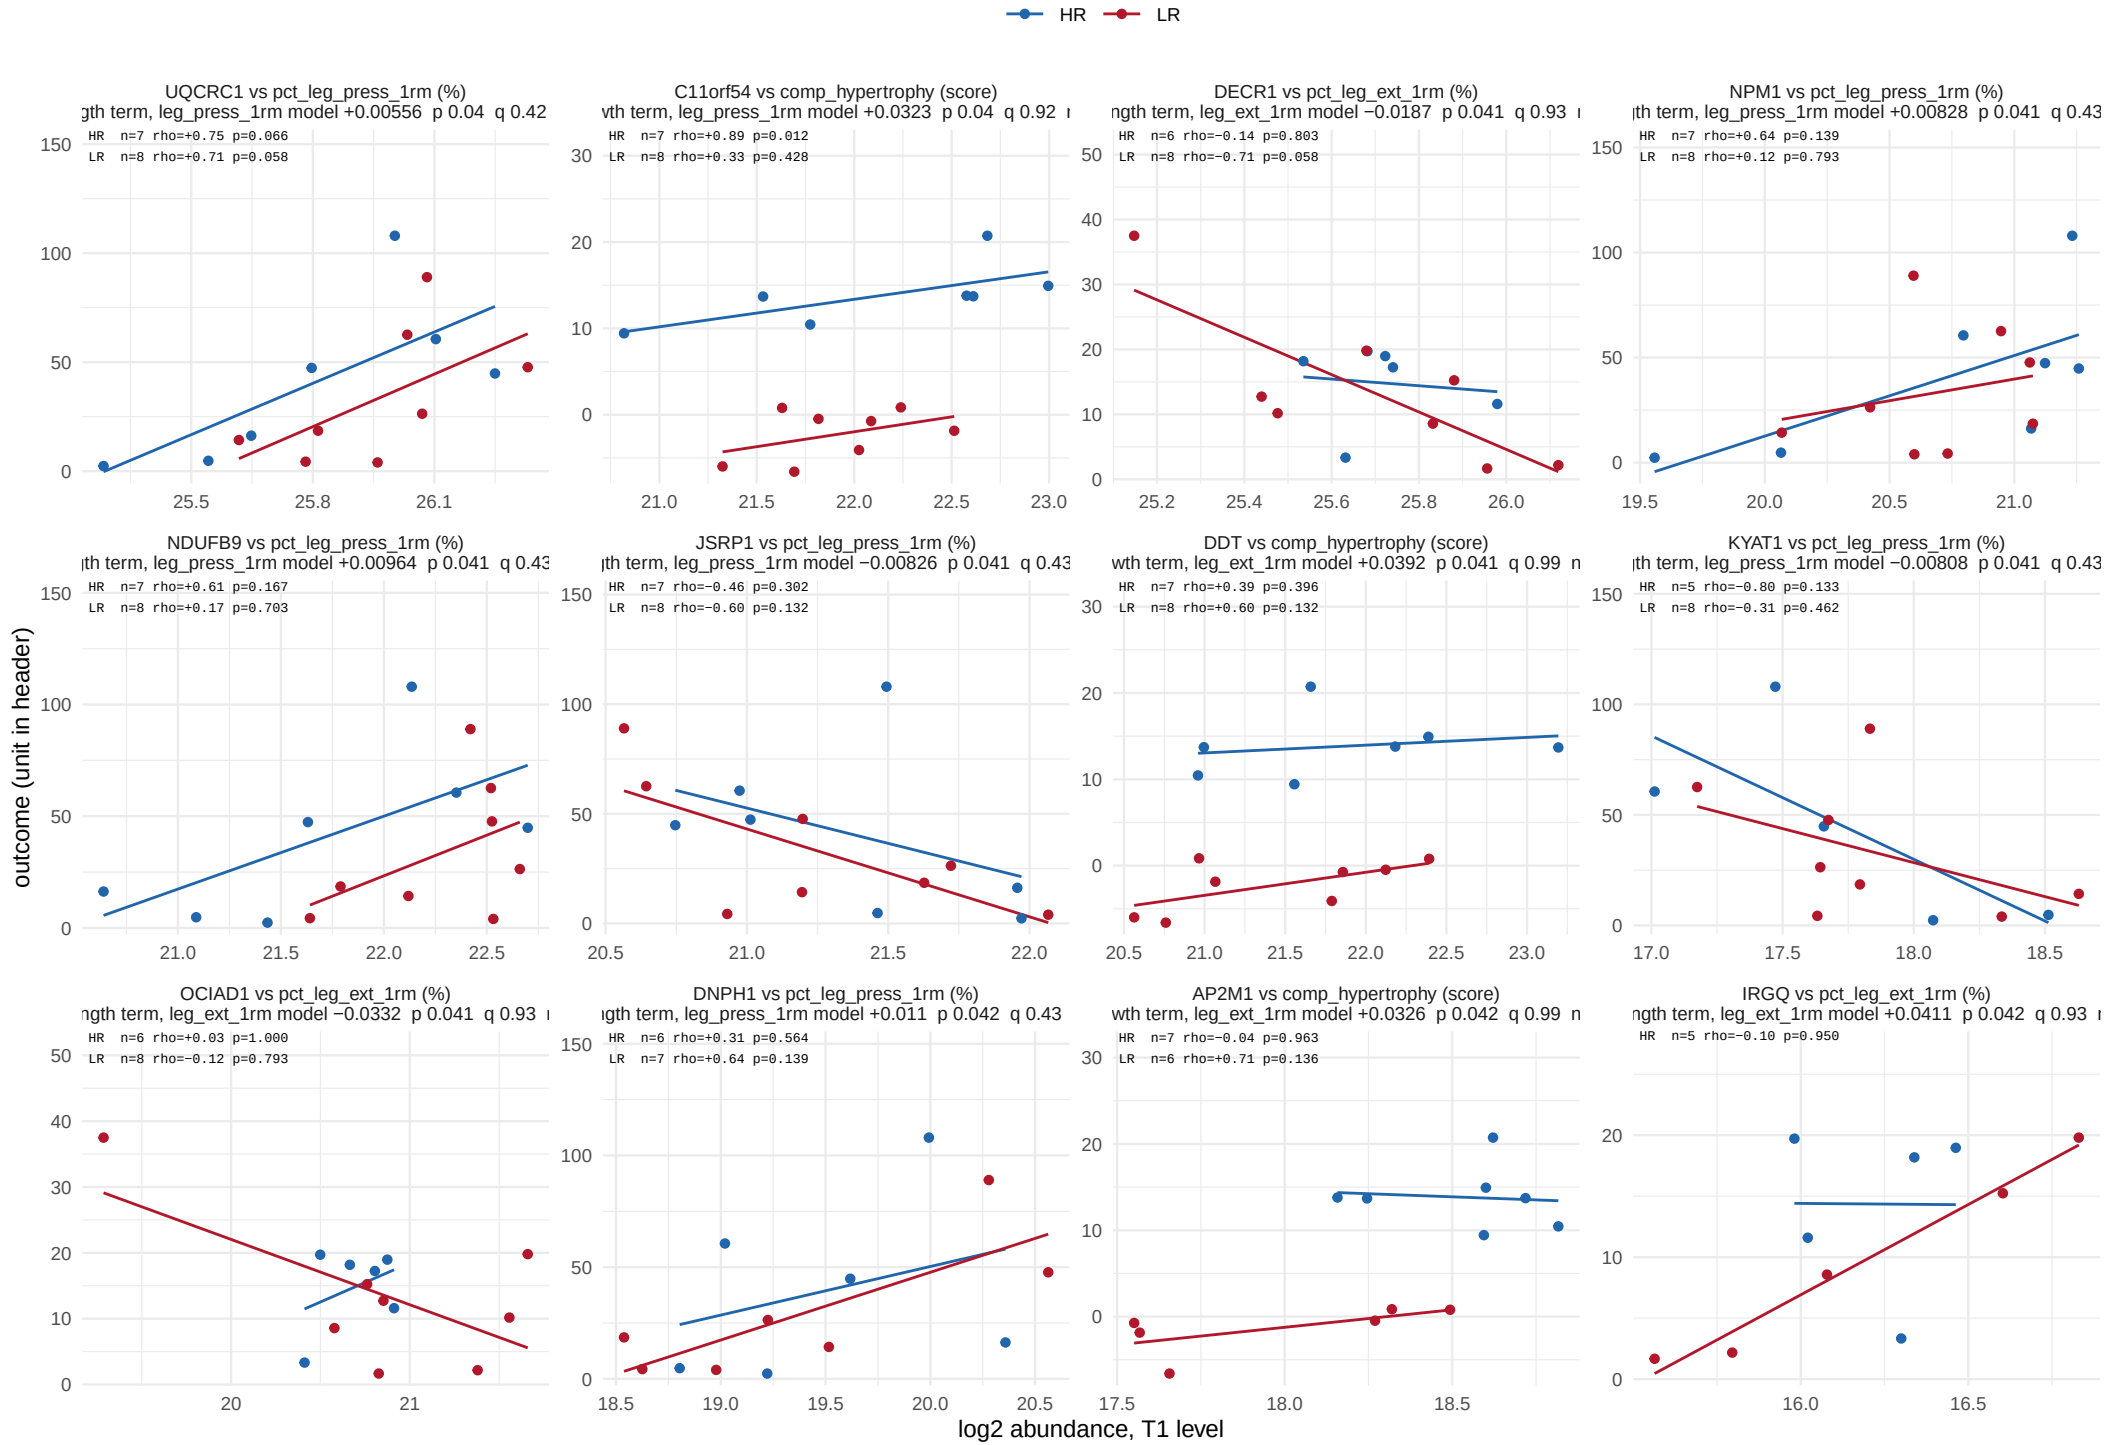


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, baseline window

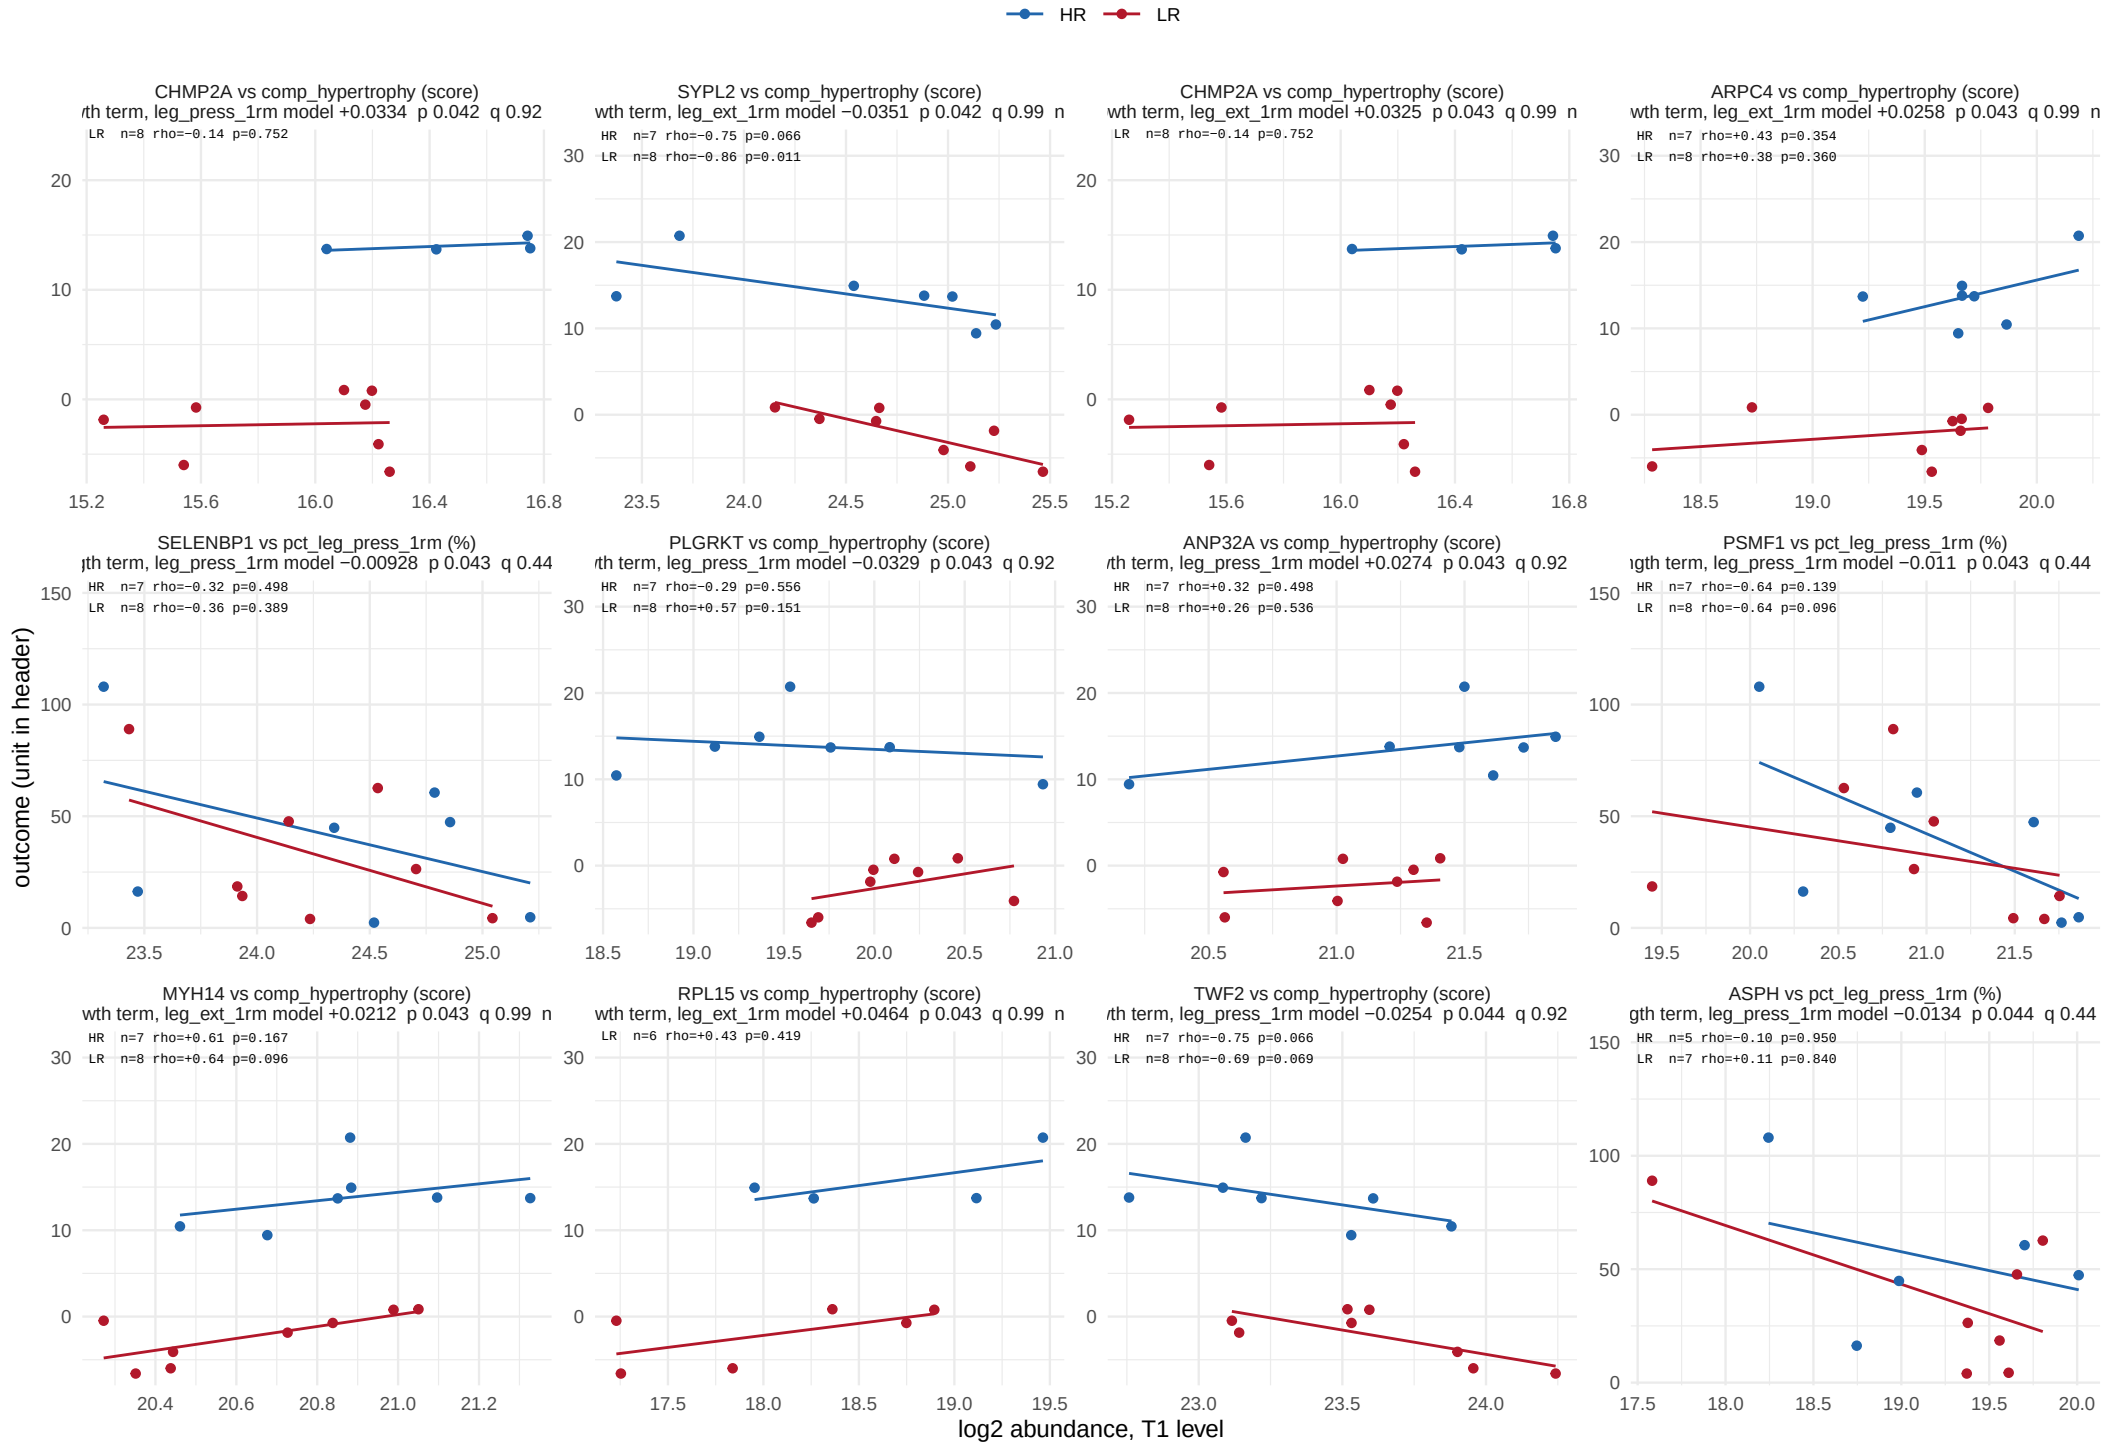


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, baseline window

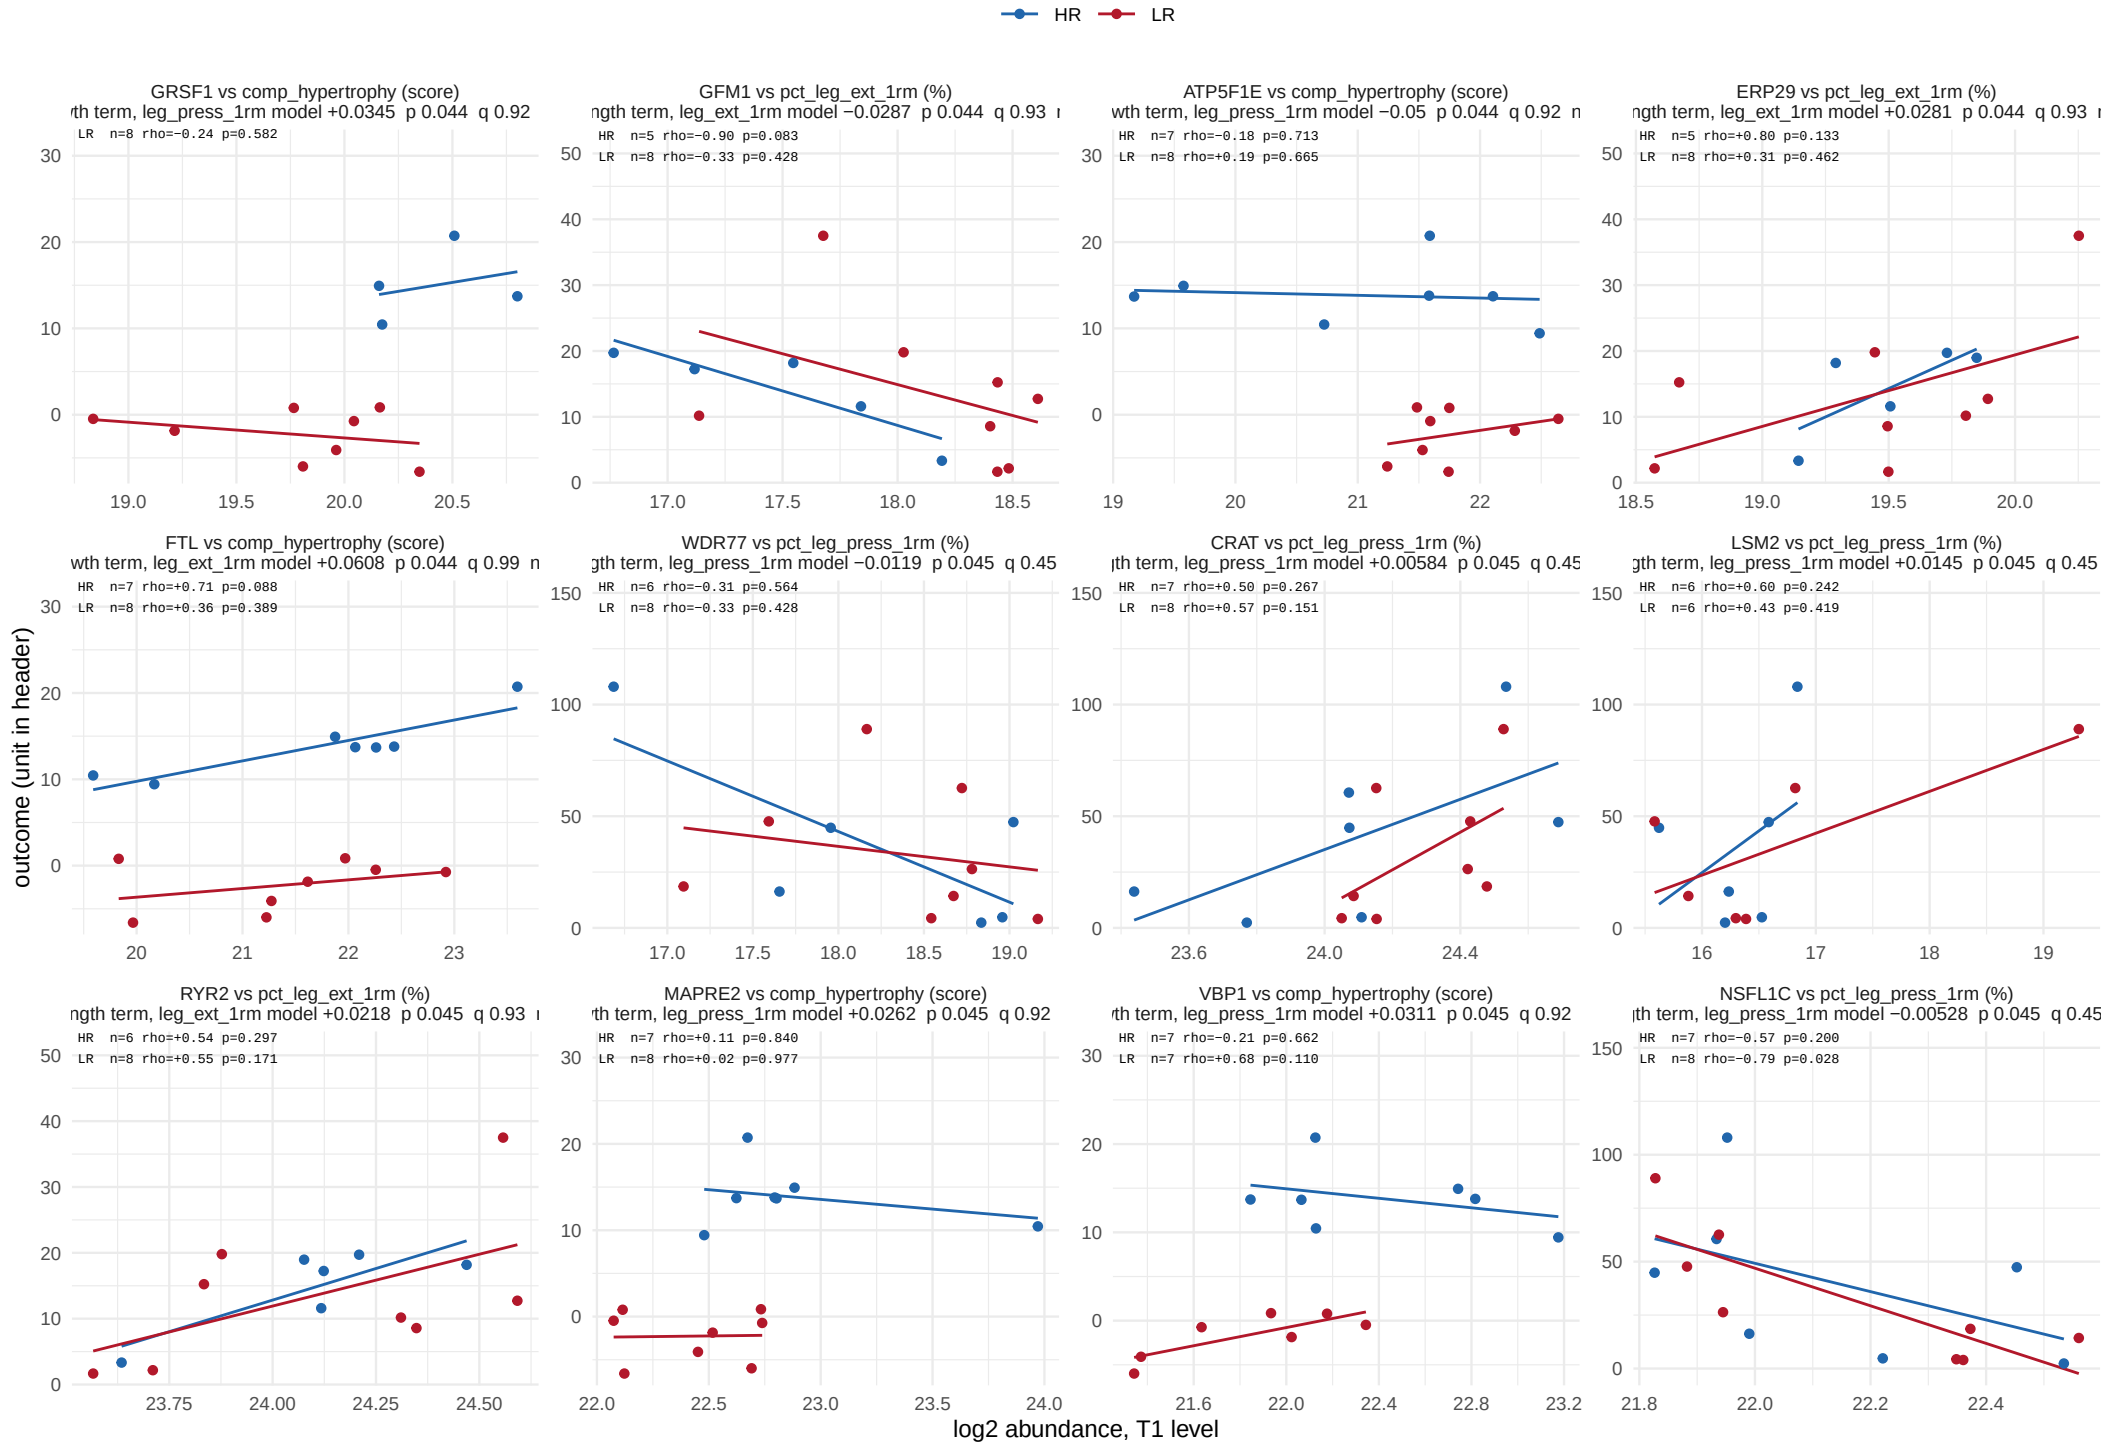


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, baseline window

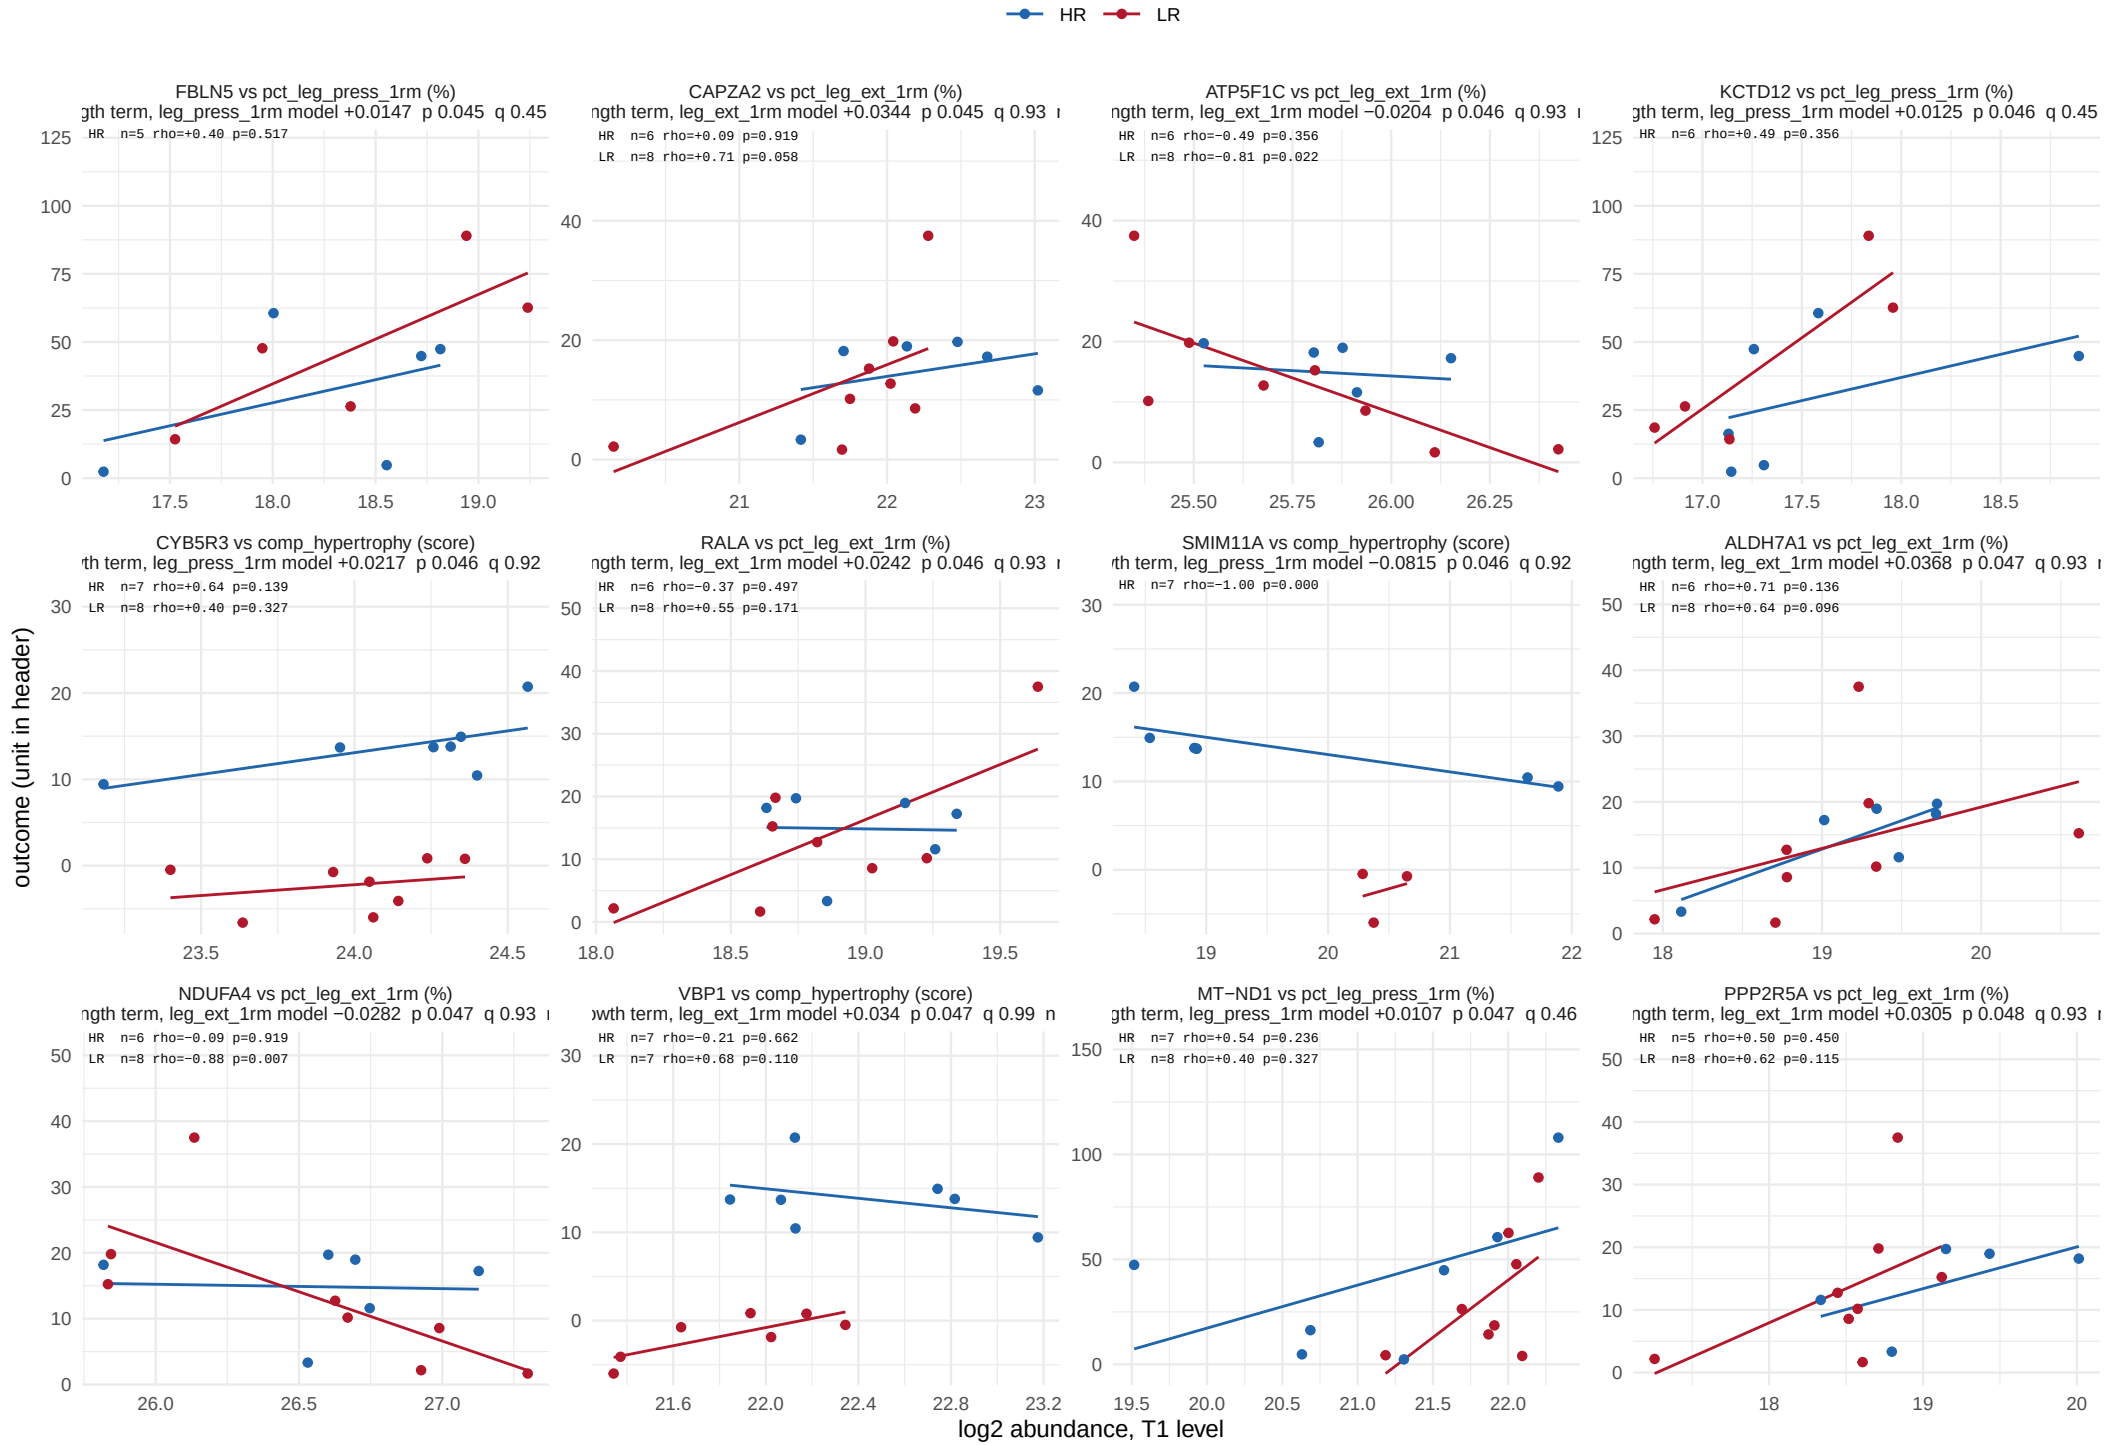


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, baseline window

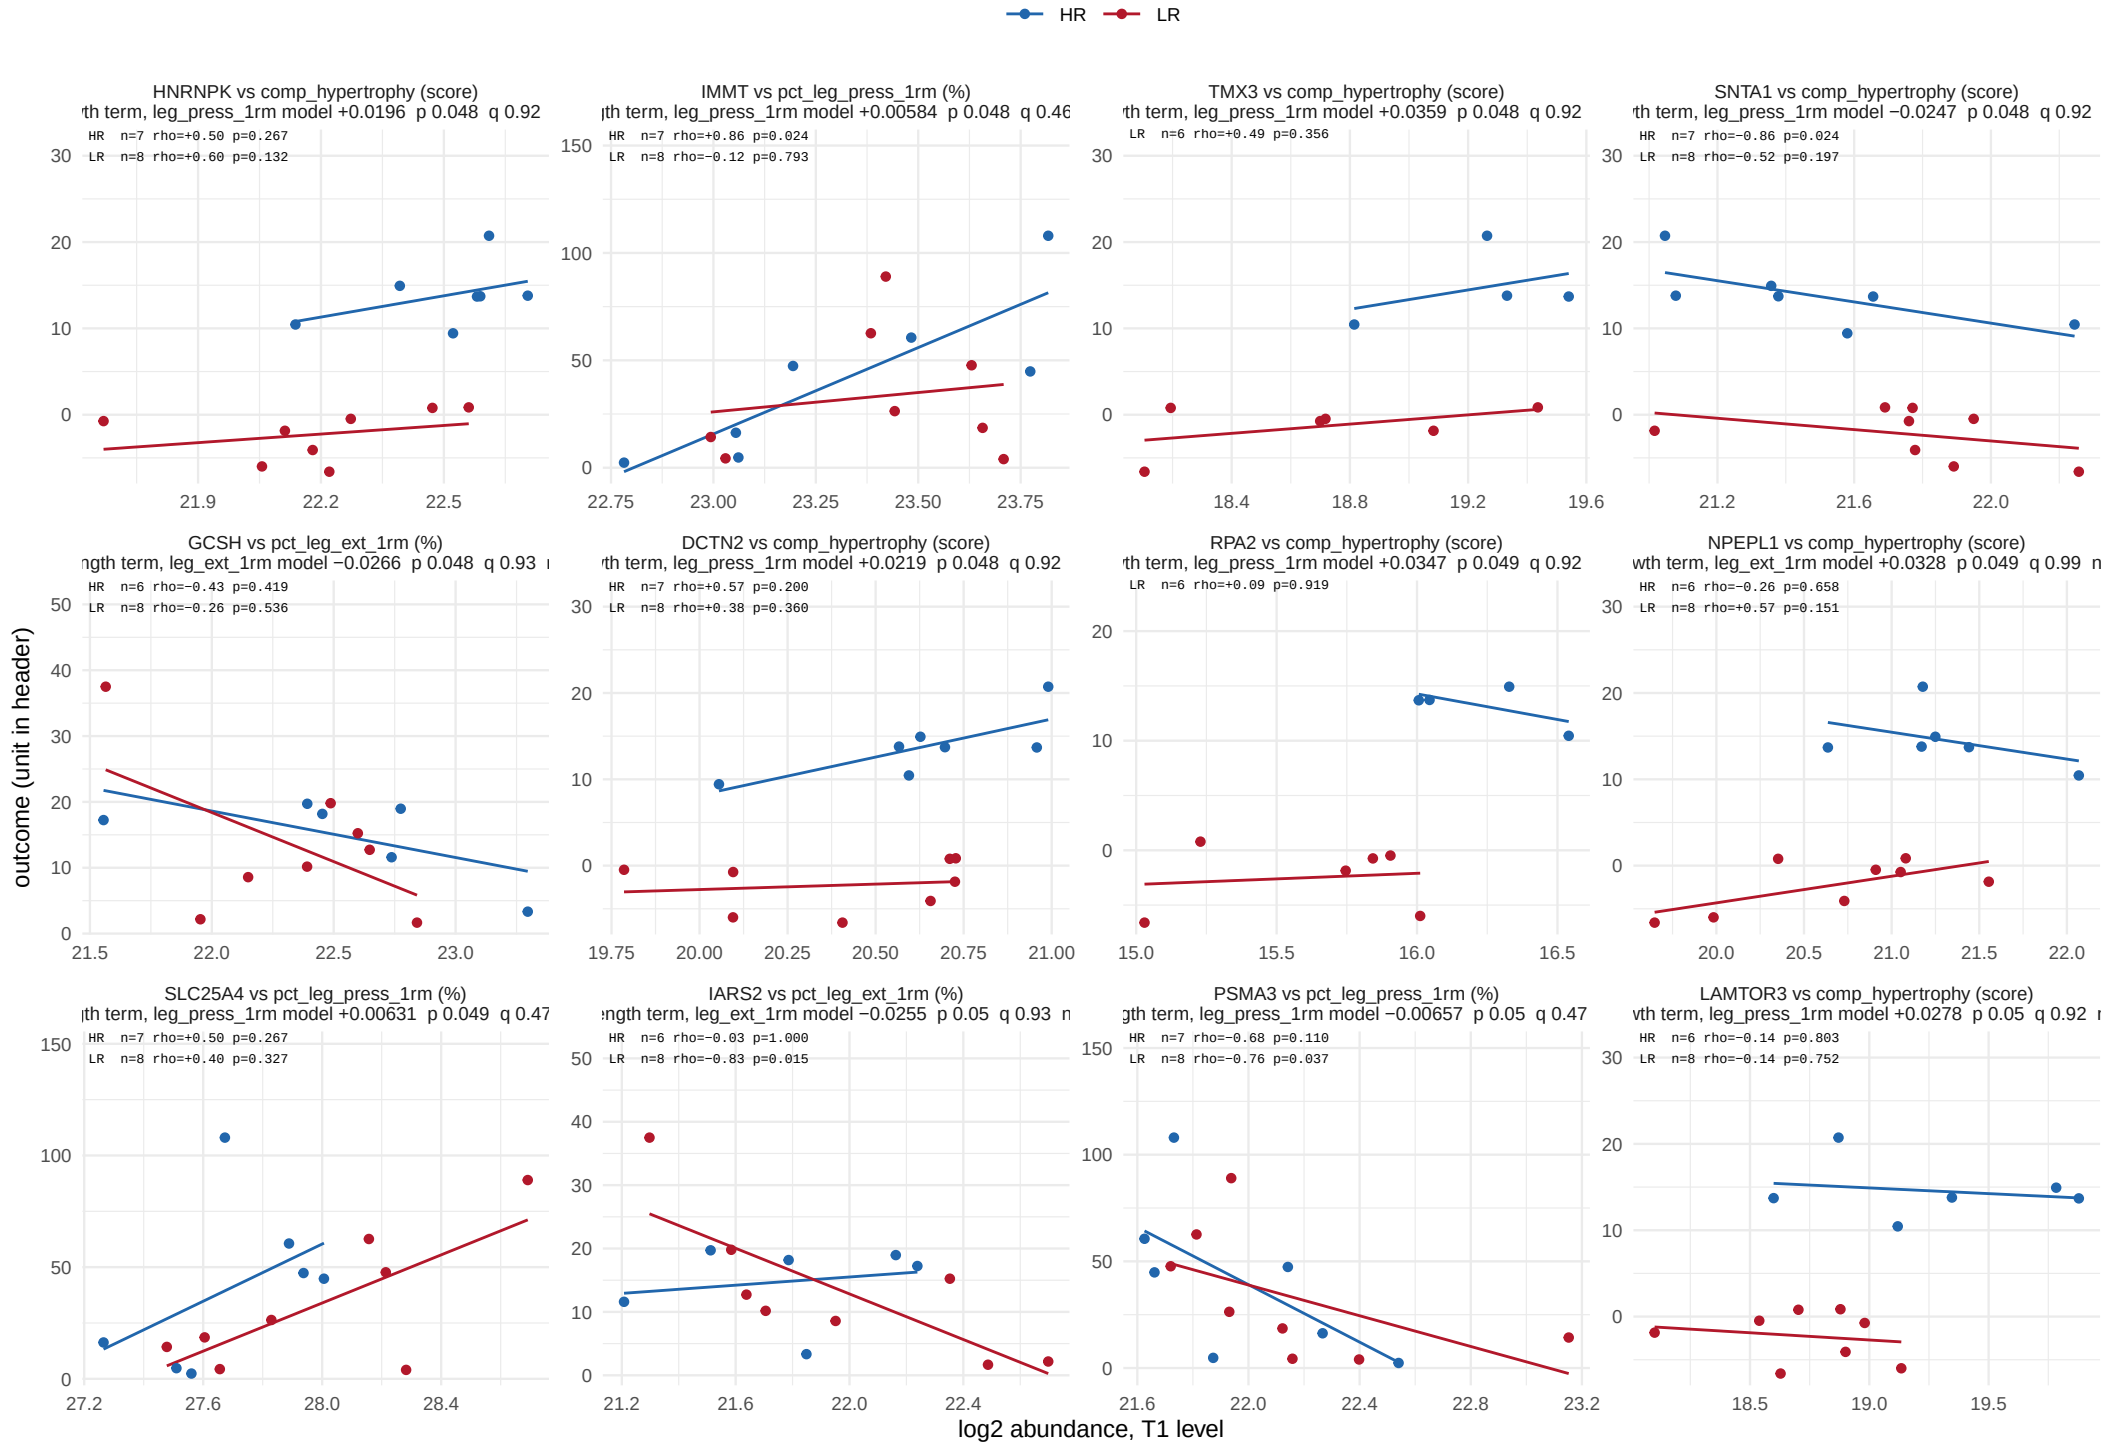

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.


Two predictor, baseline window

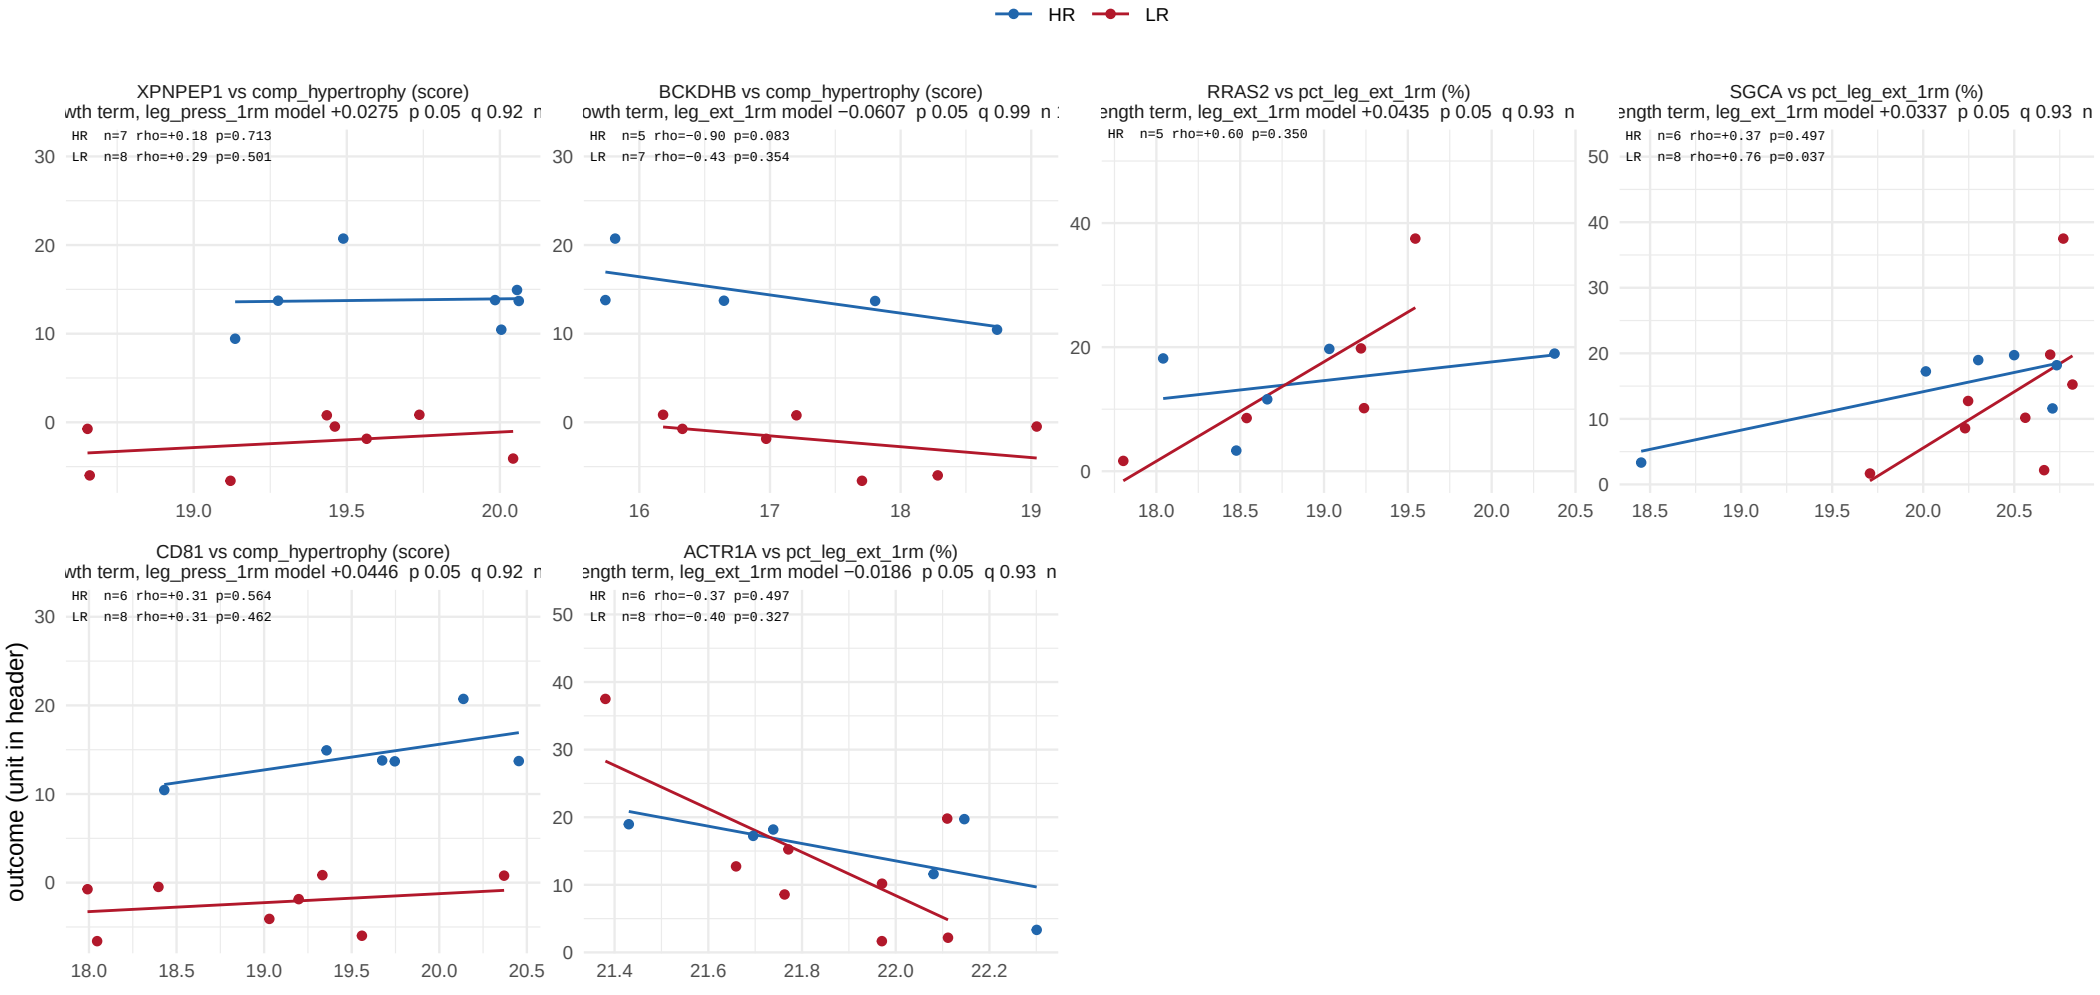

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, acute window


465 of 5806 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 1 of 39.

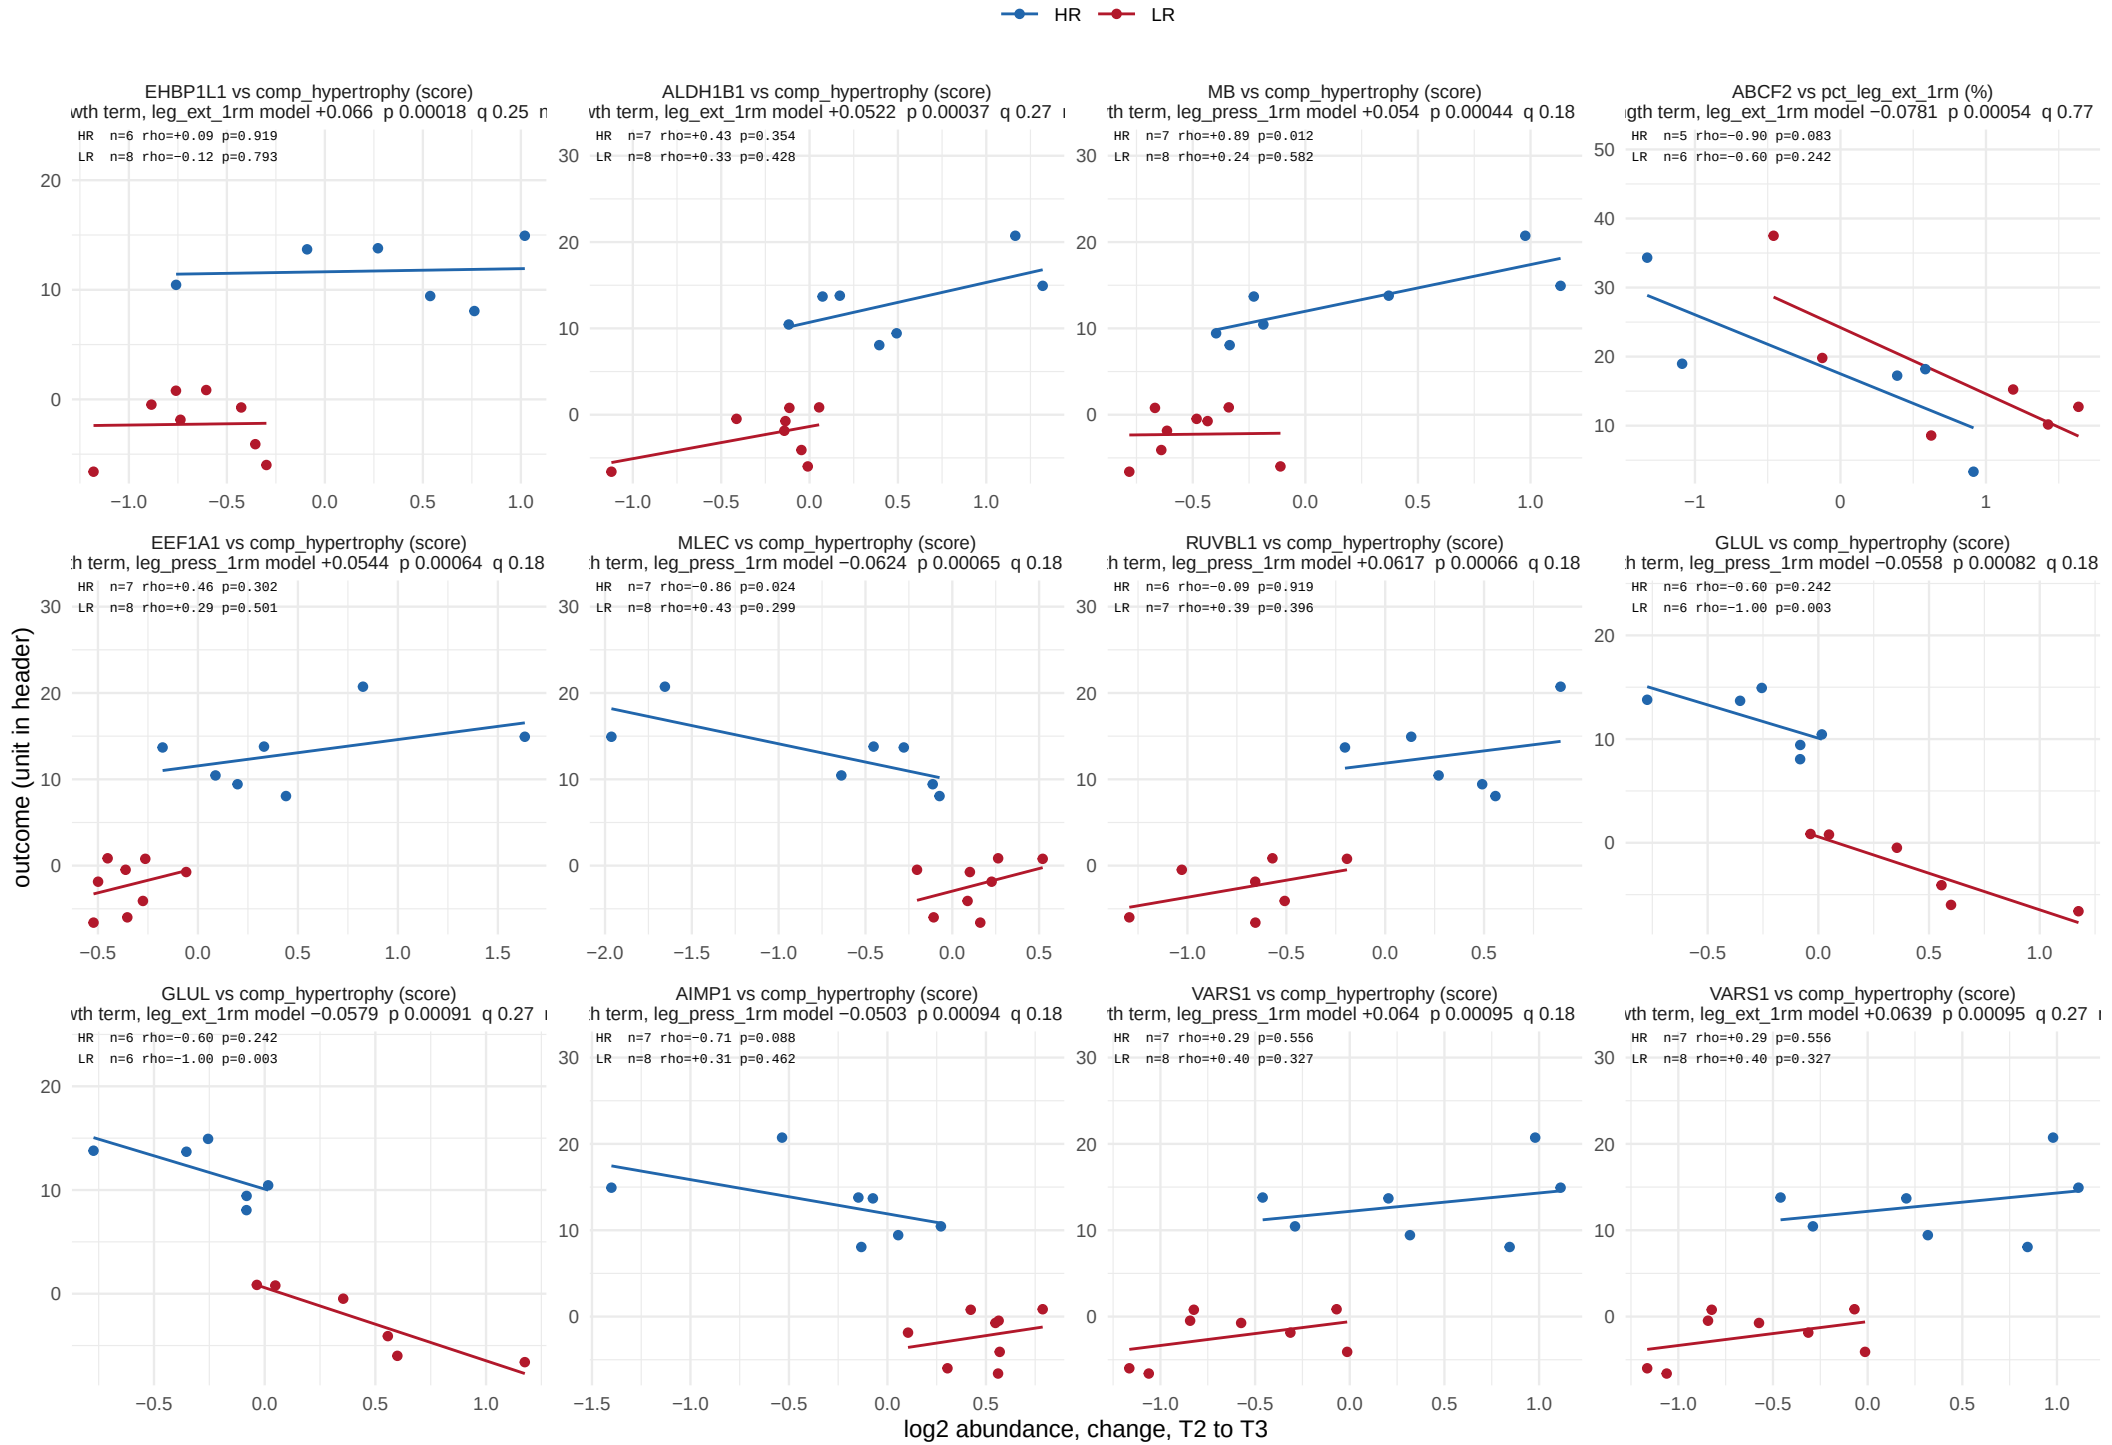

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, acute window


465 of 5806 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 2 of 39.

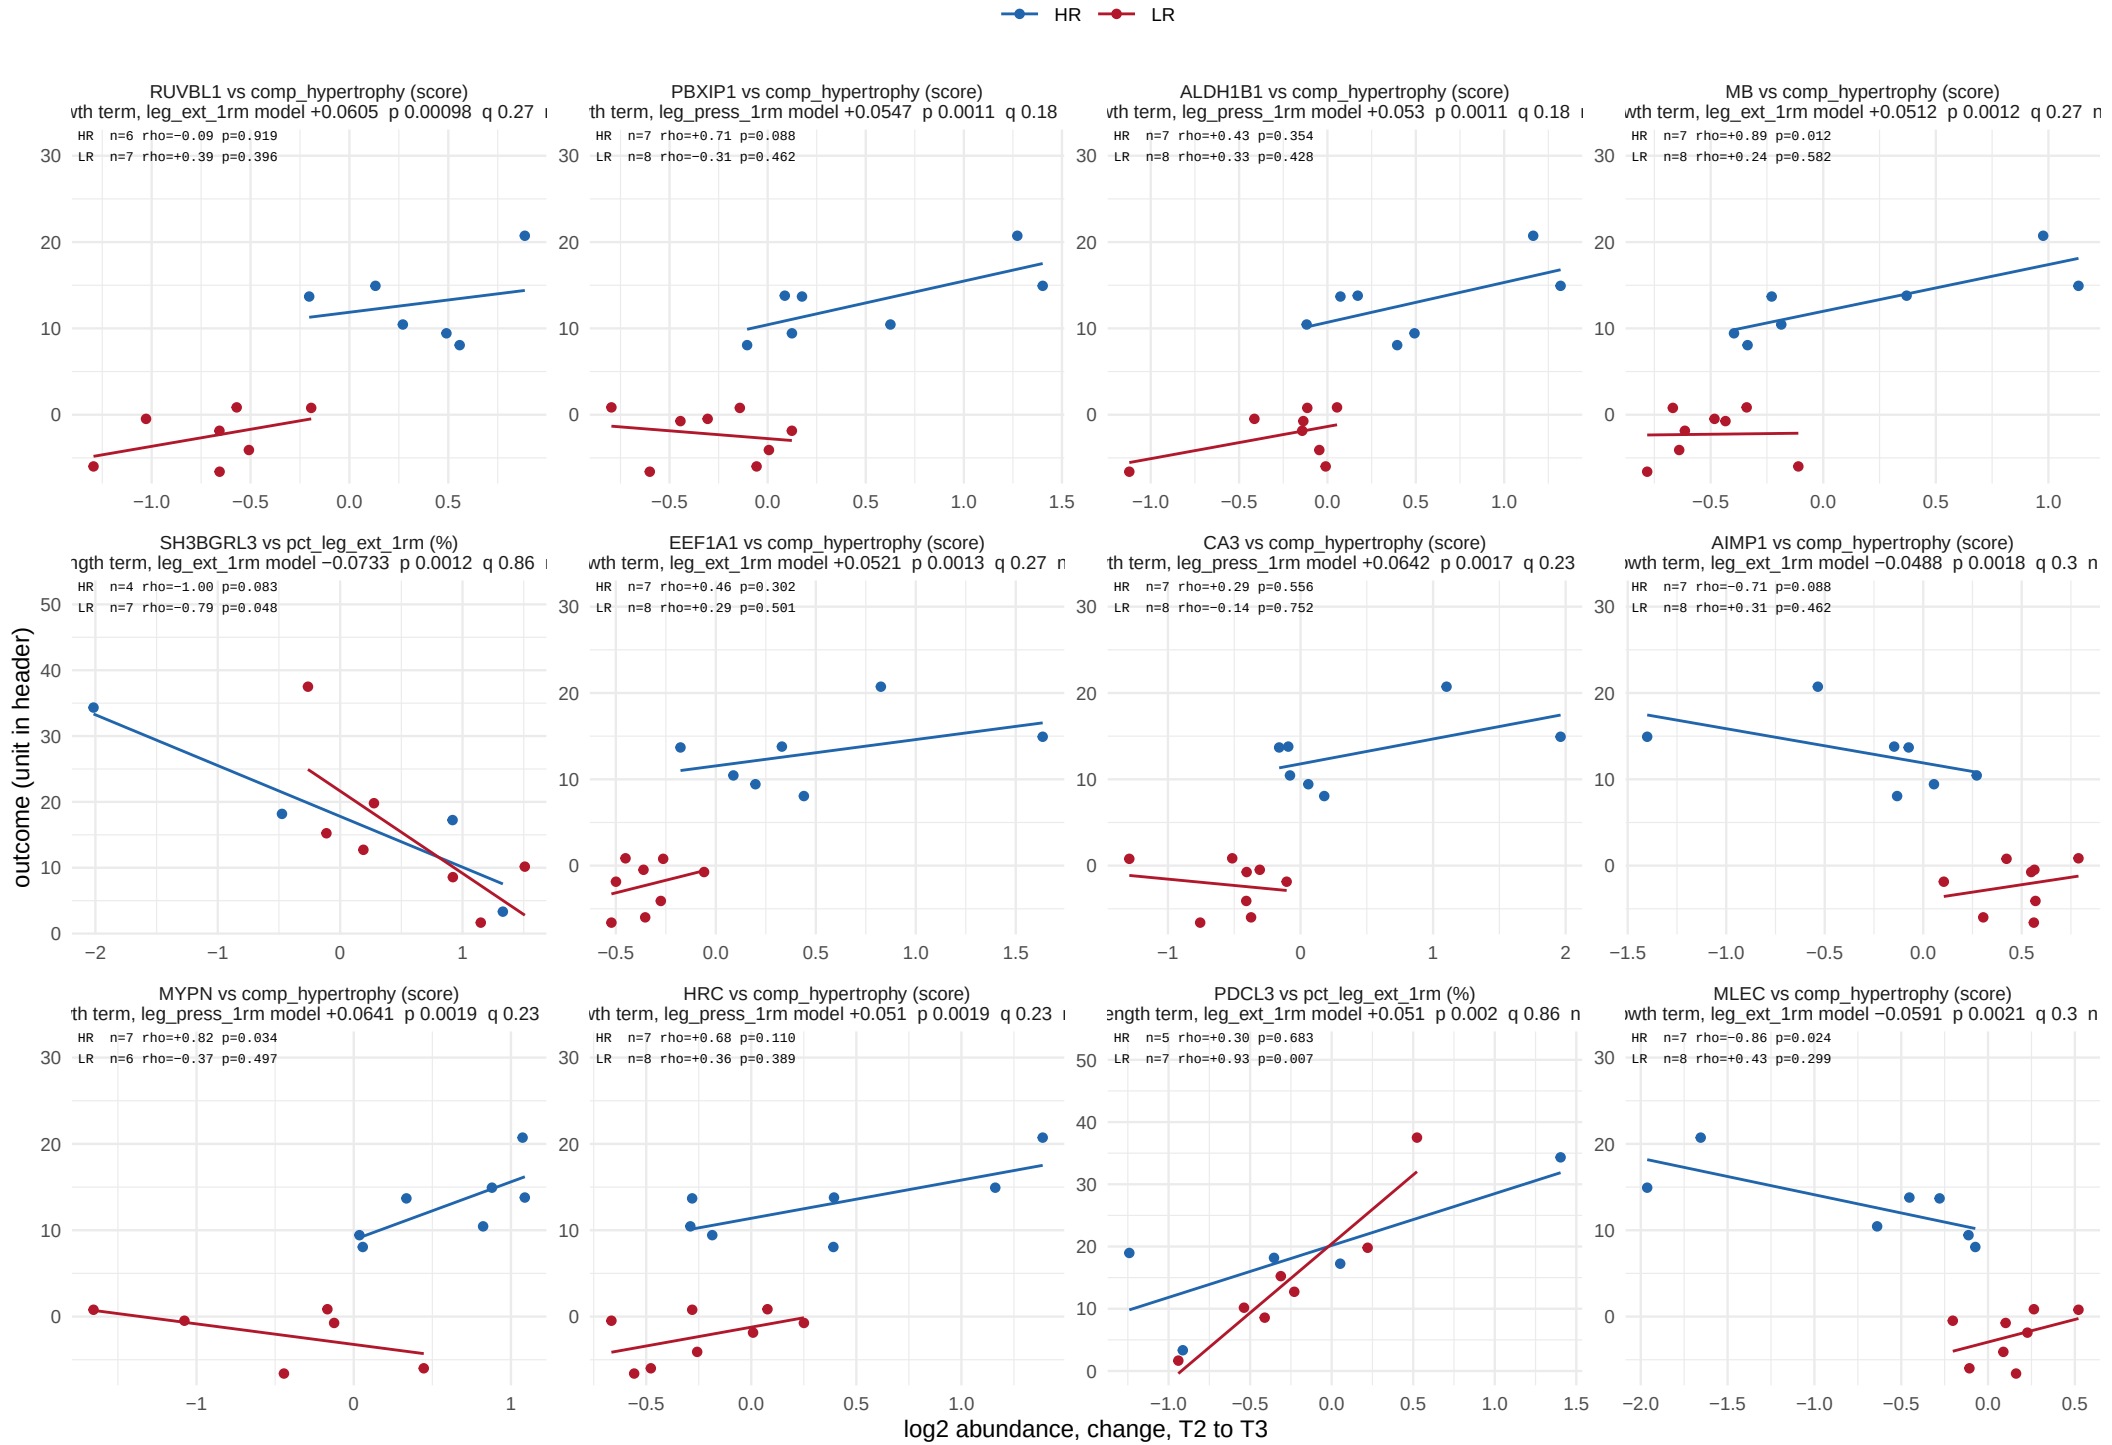

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, acute window


465 of 5806 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 3 of 39.

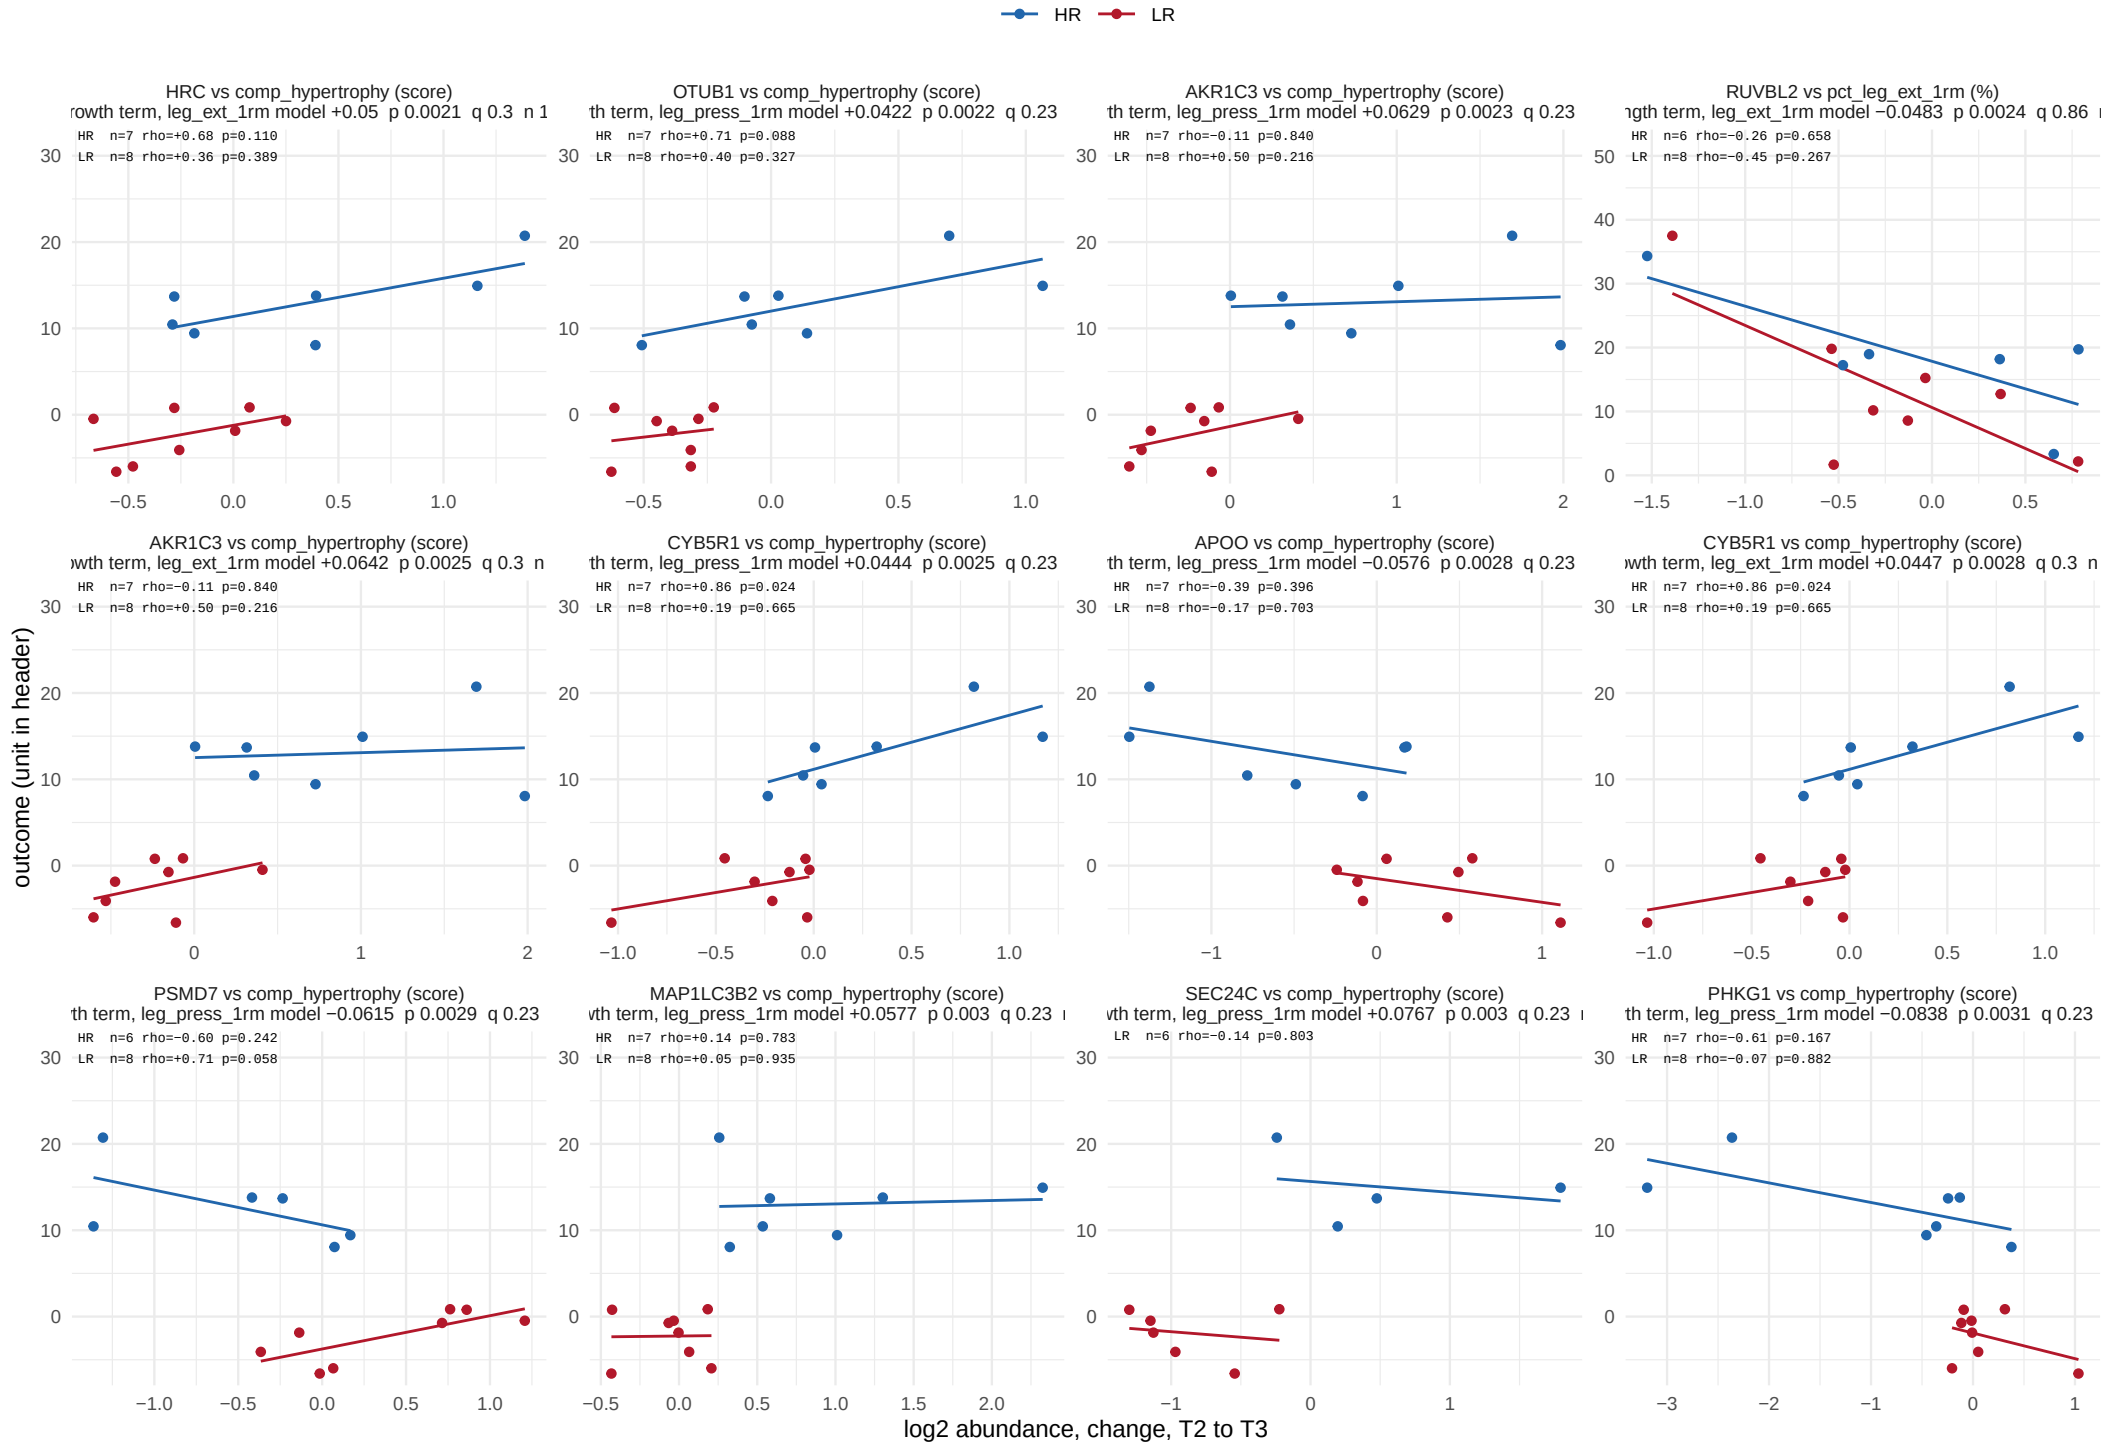

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, acute window


465 of 5806 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 4 of 39.

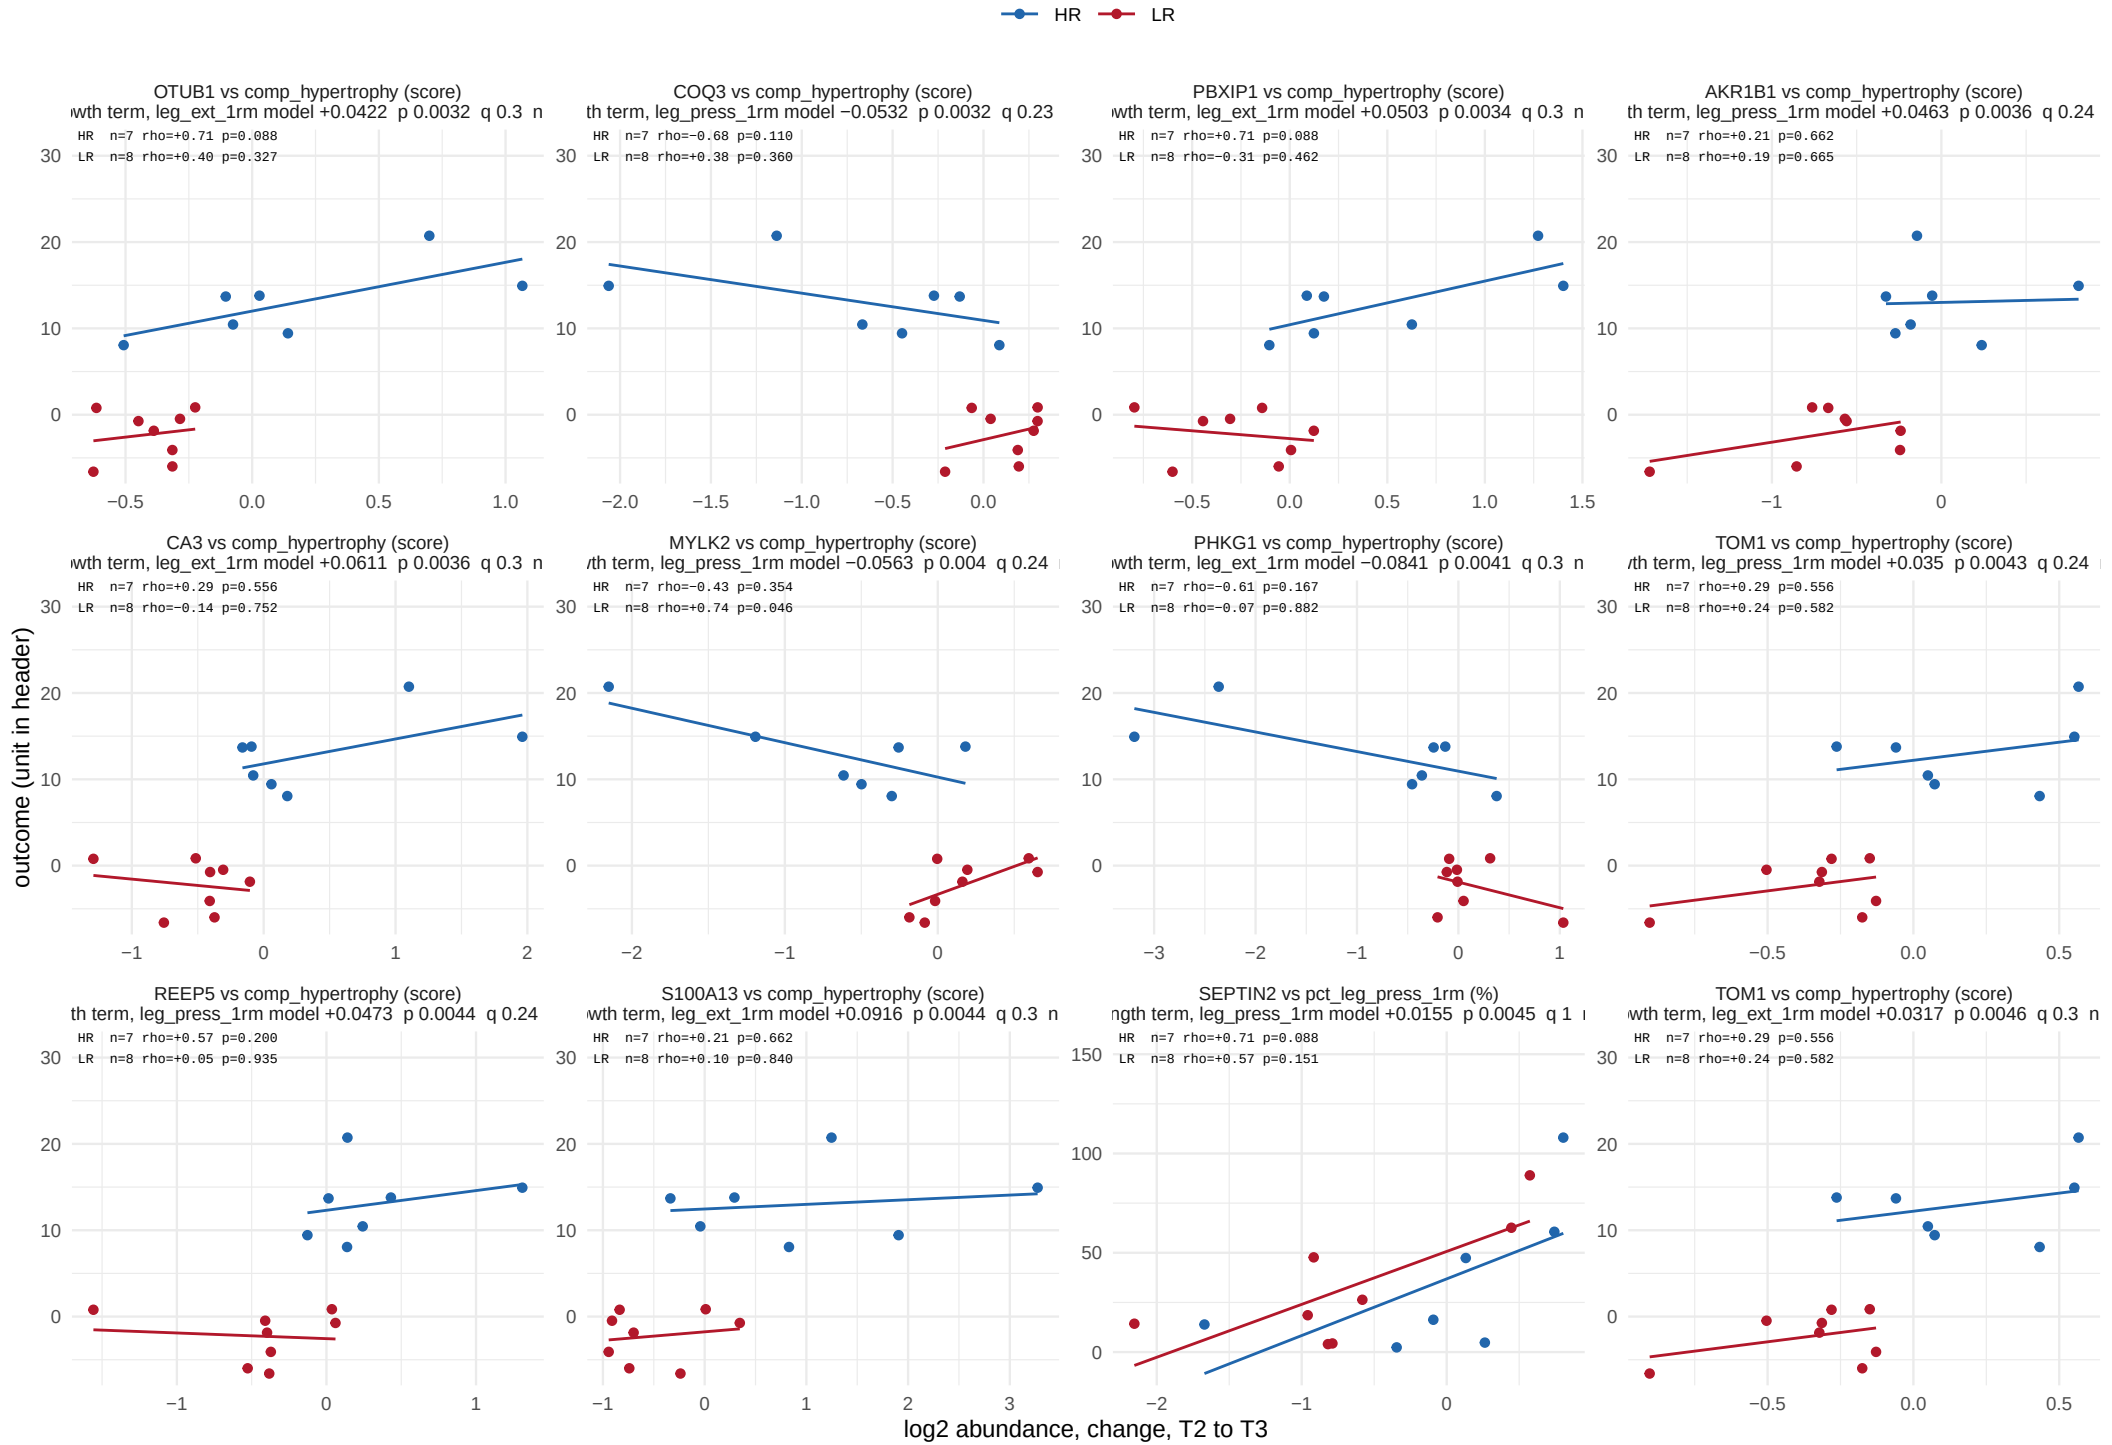

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, acute window


465 of 5806 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 5 of 39.

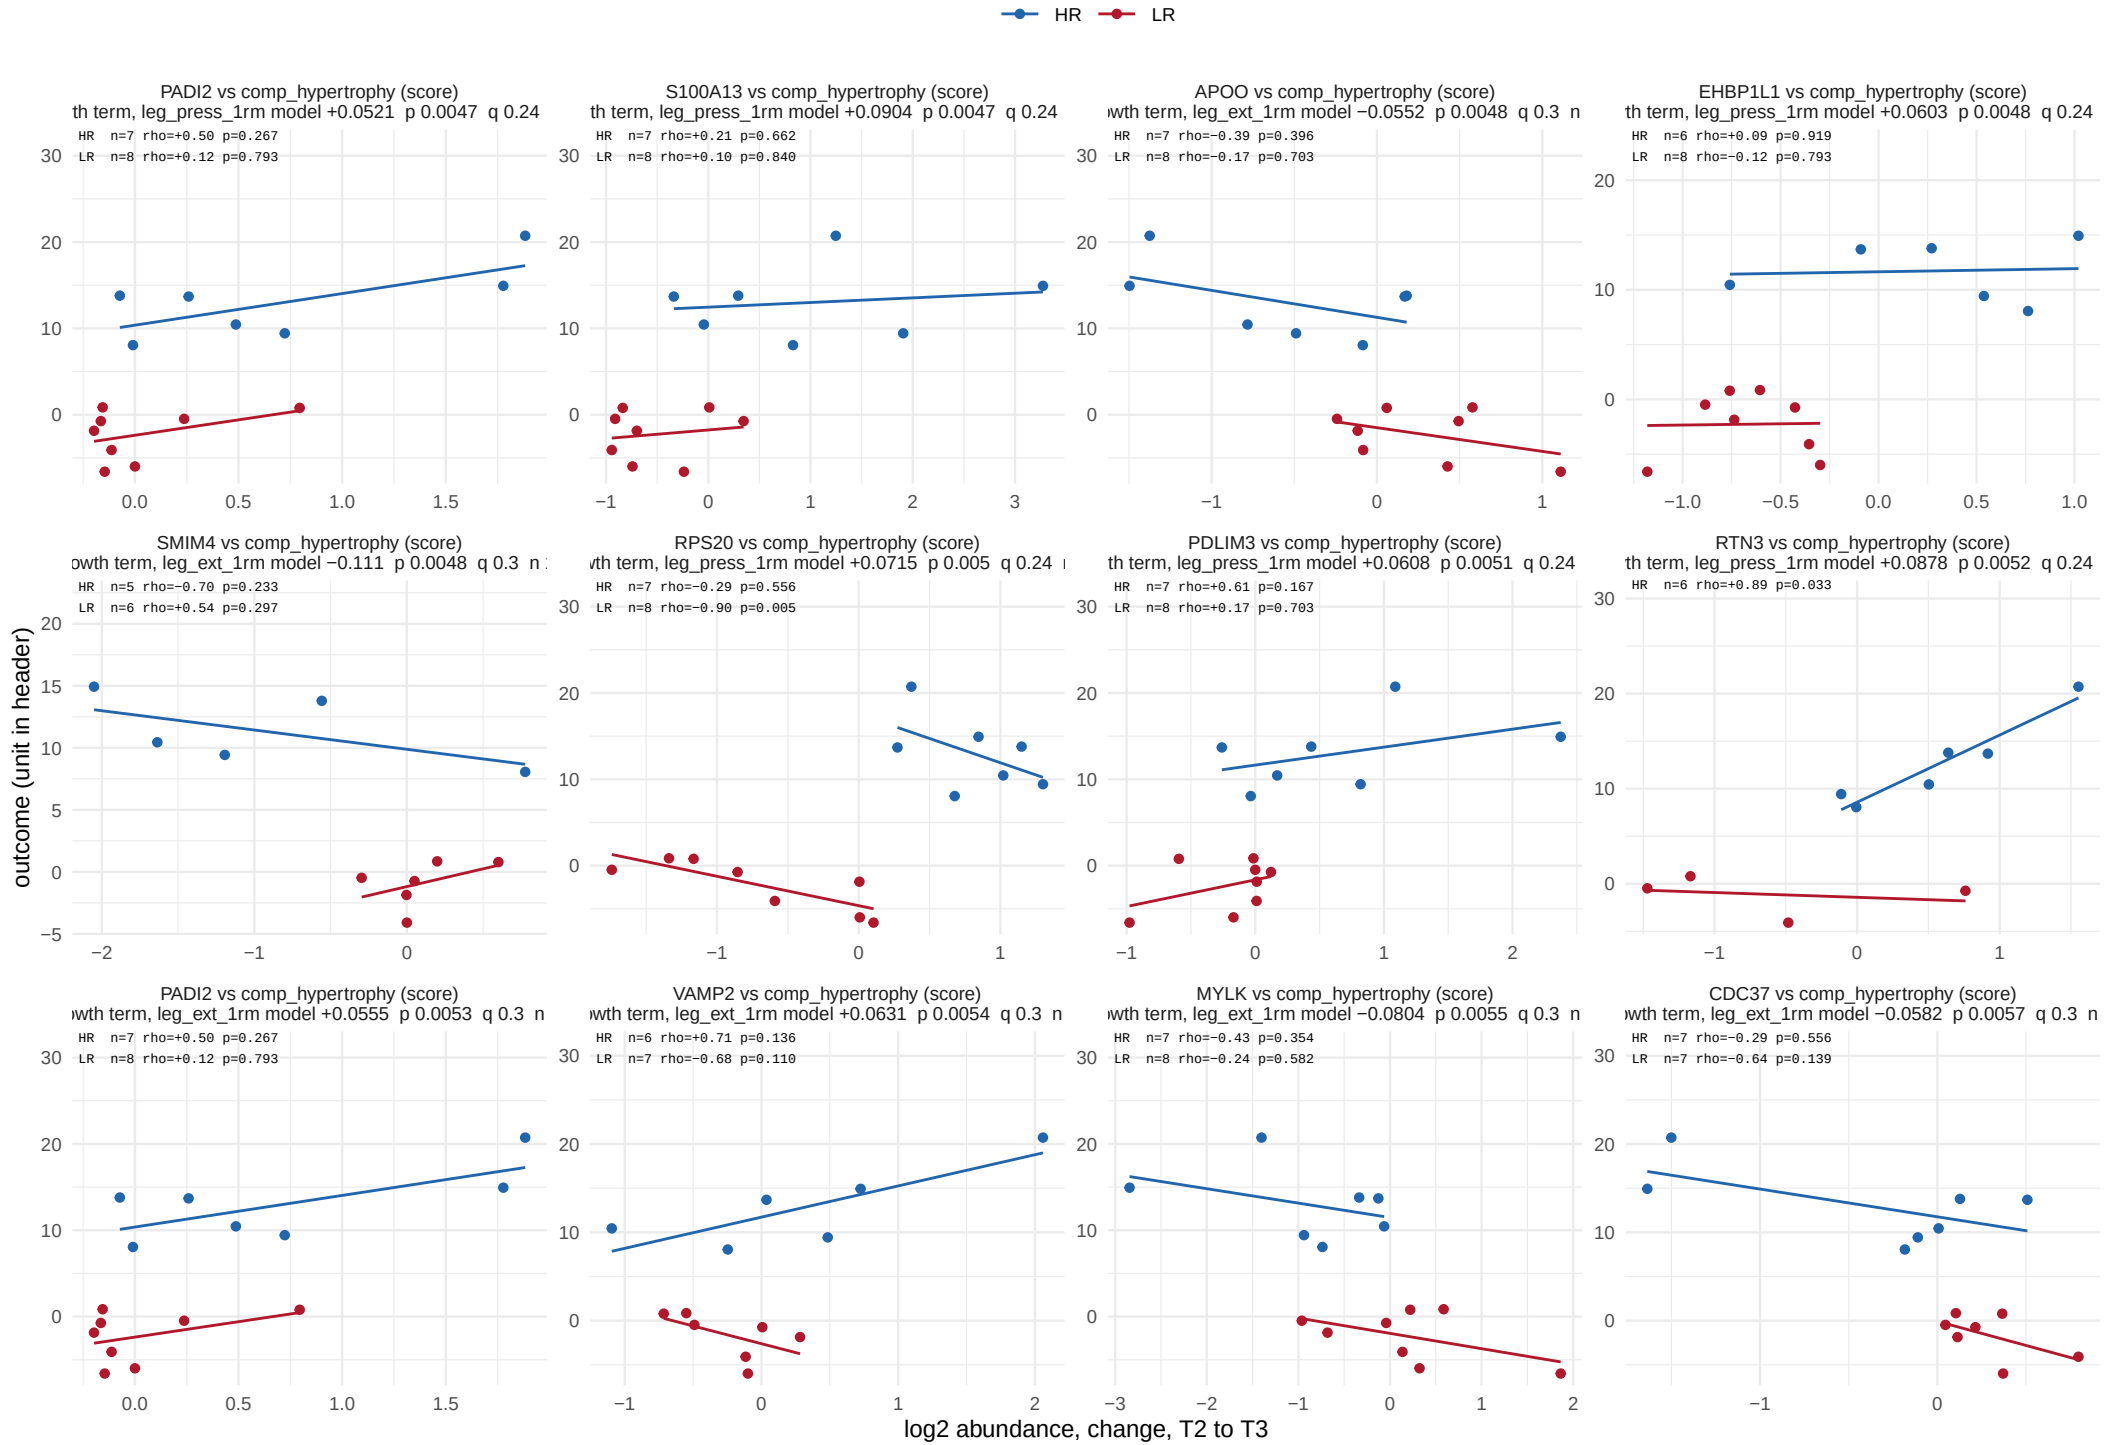

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, acute window


465 of 5806 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 6 of 39.

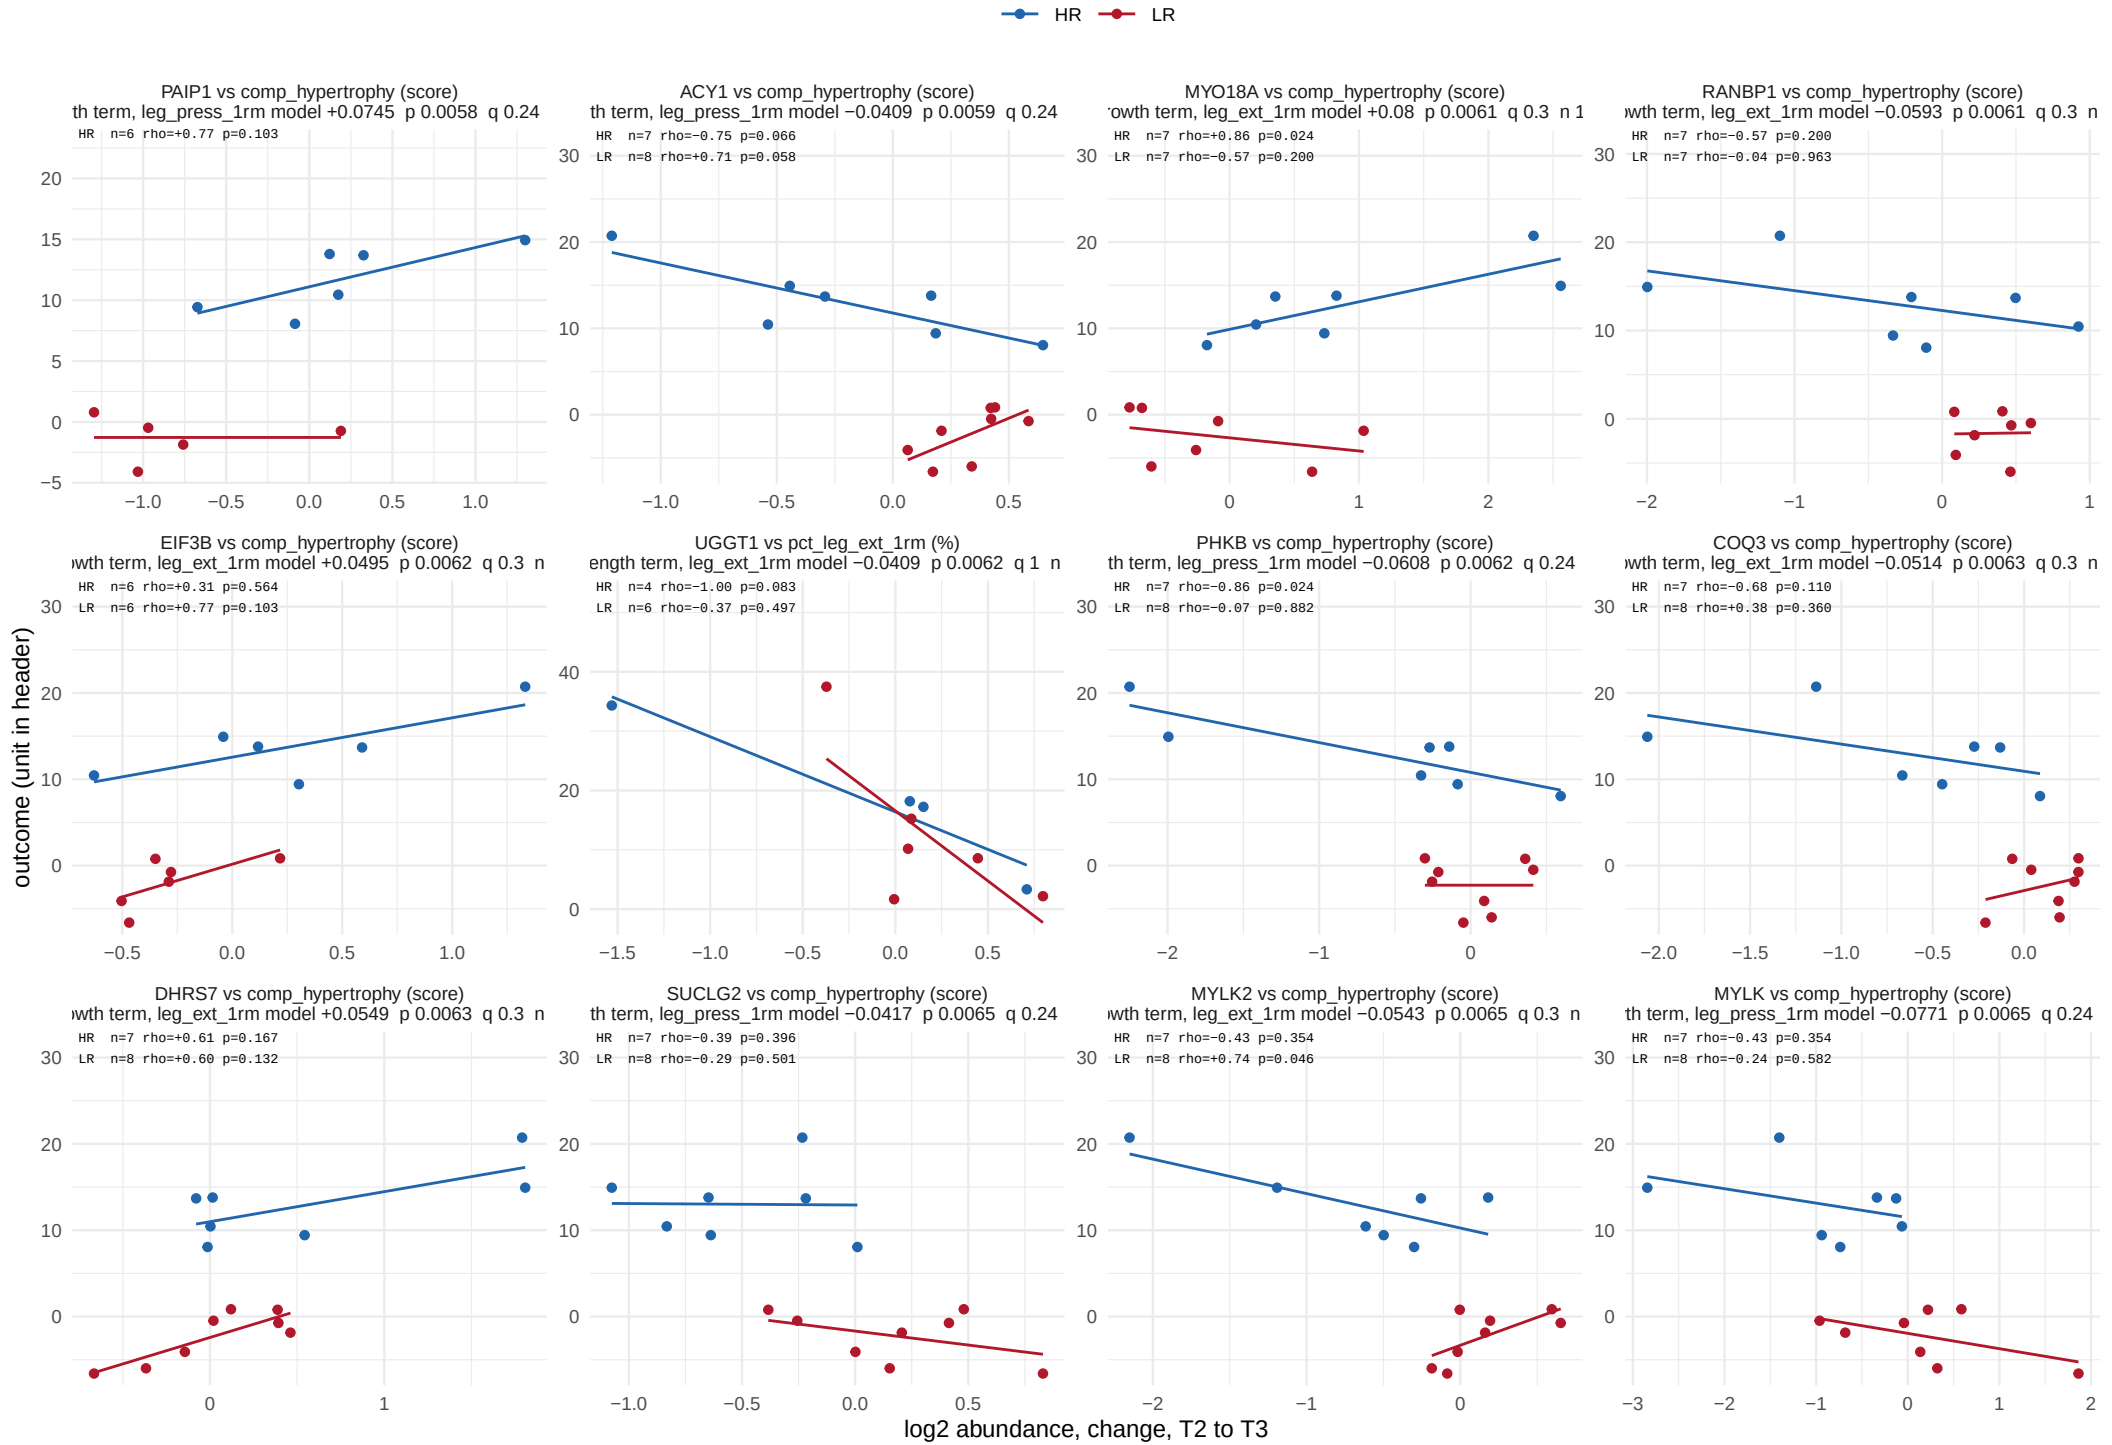

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, acute window


465 of 5806 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 7 of 39.

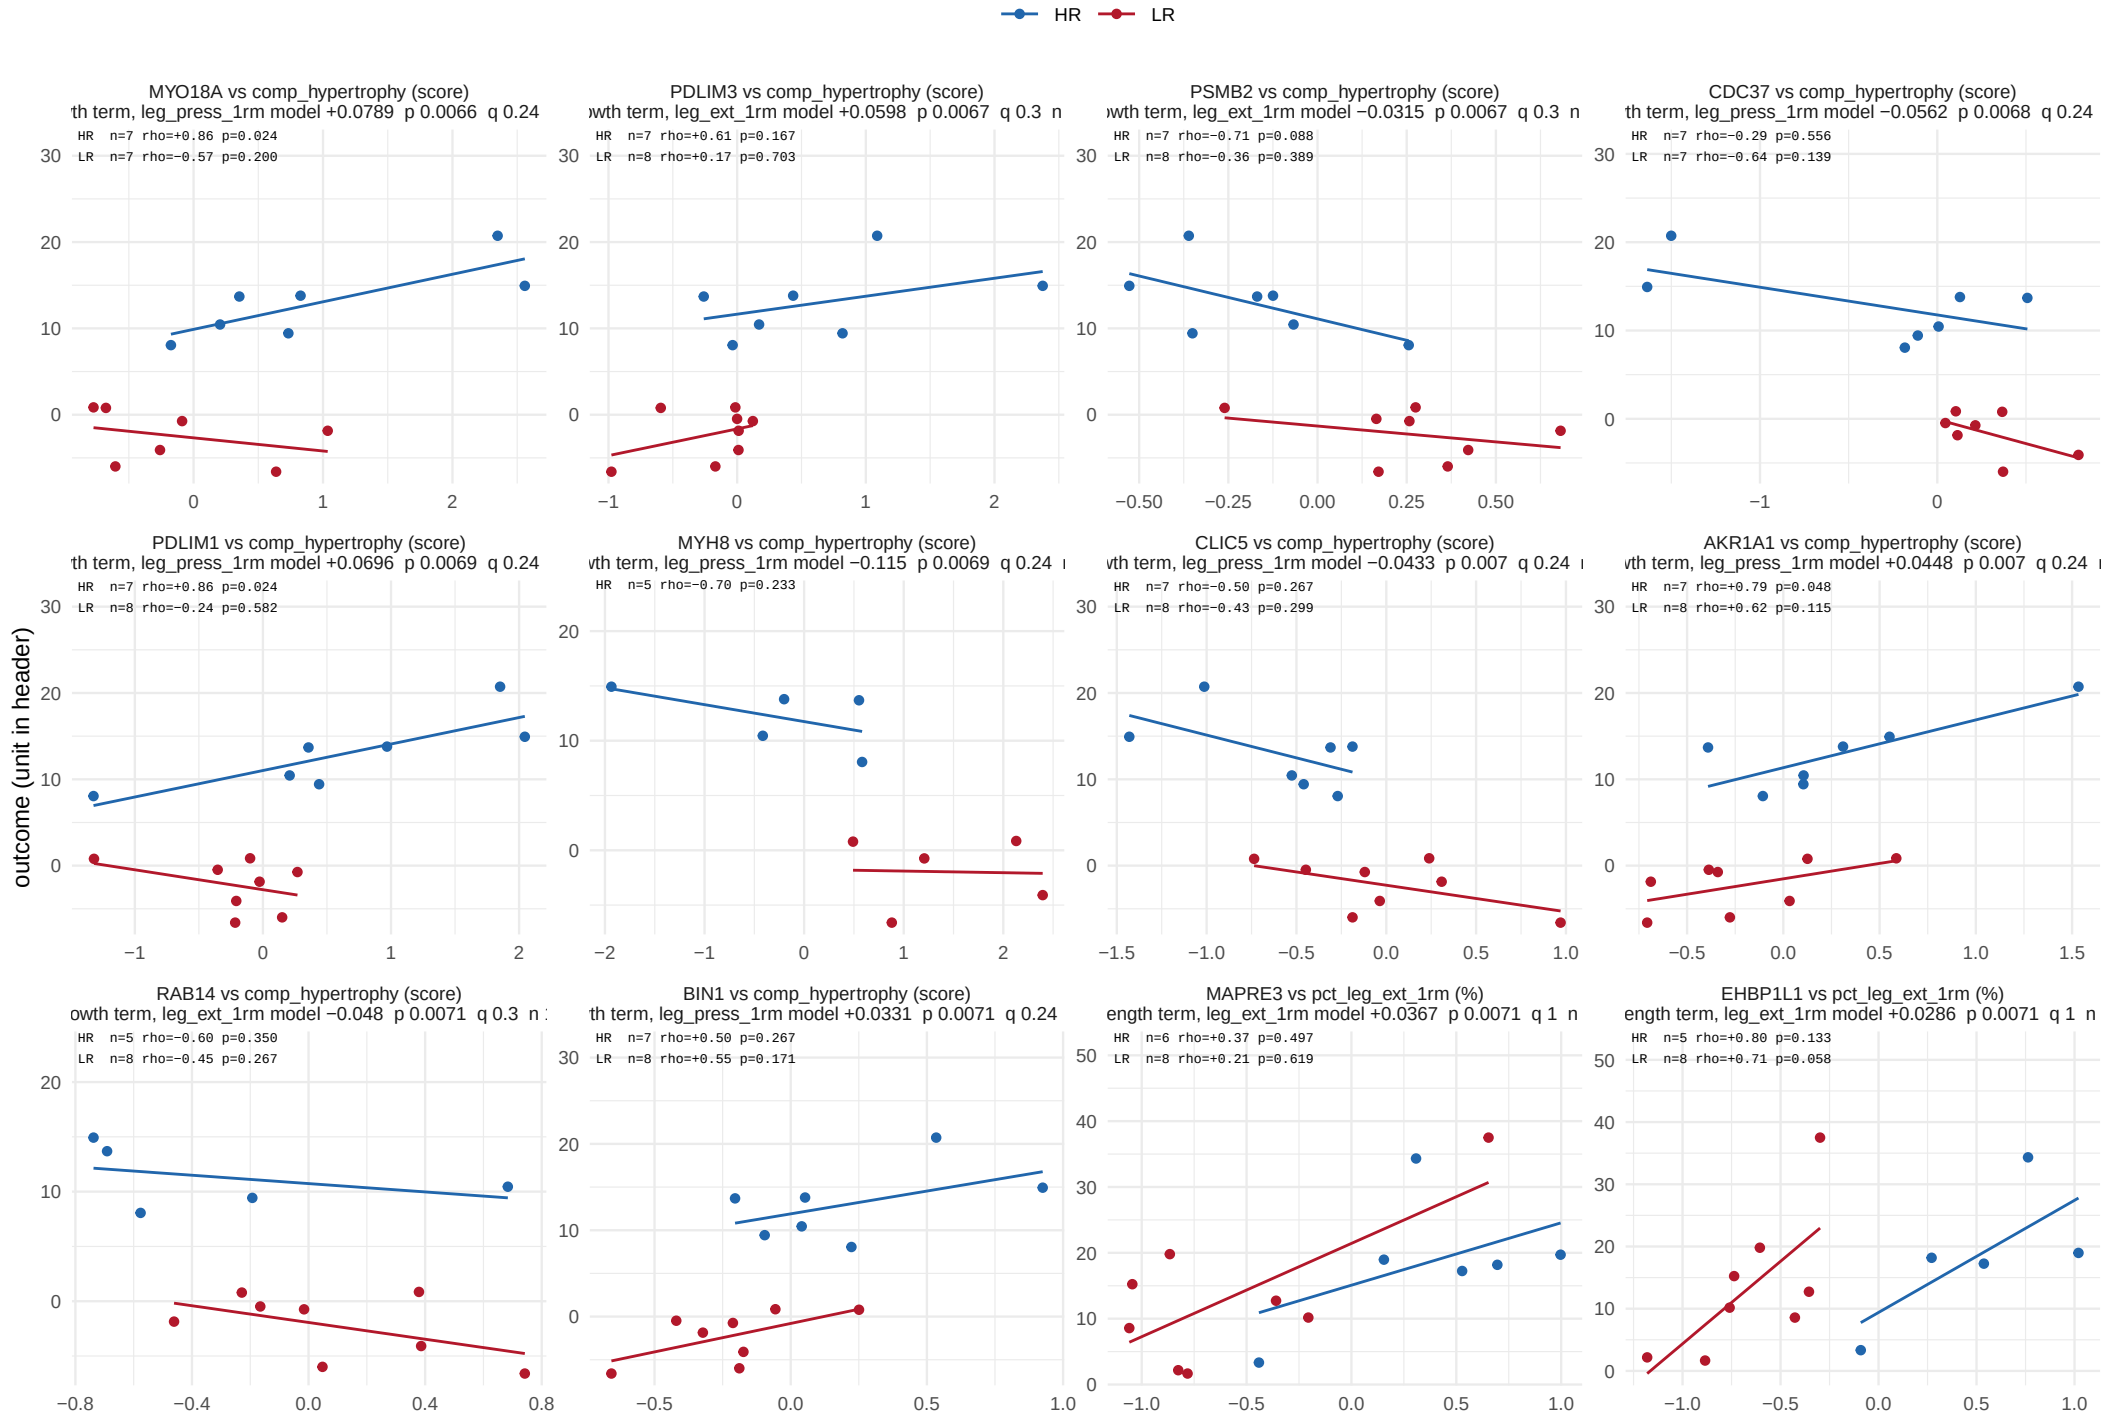

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.


Two predictor, acute window

465 of 5806 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 8 of 39.

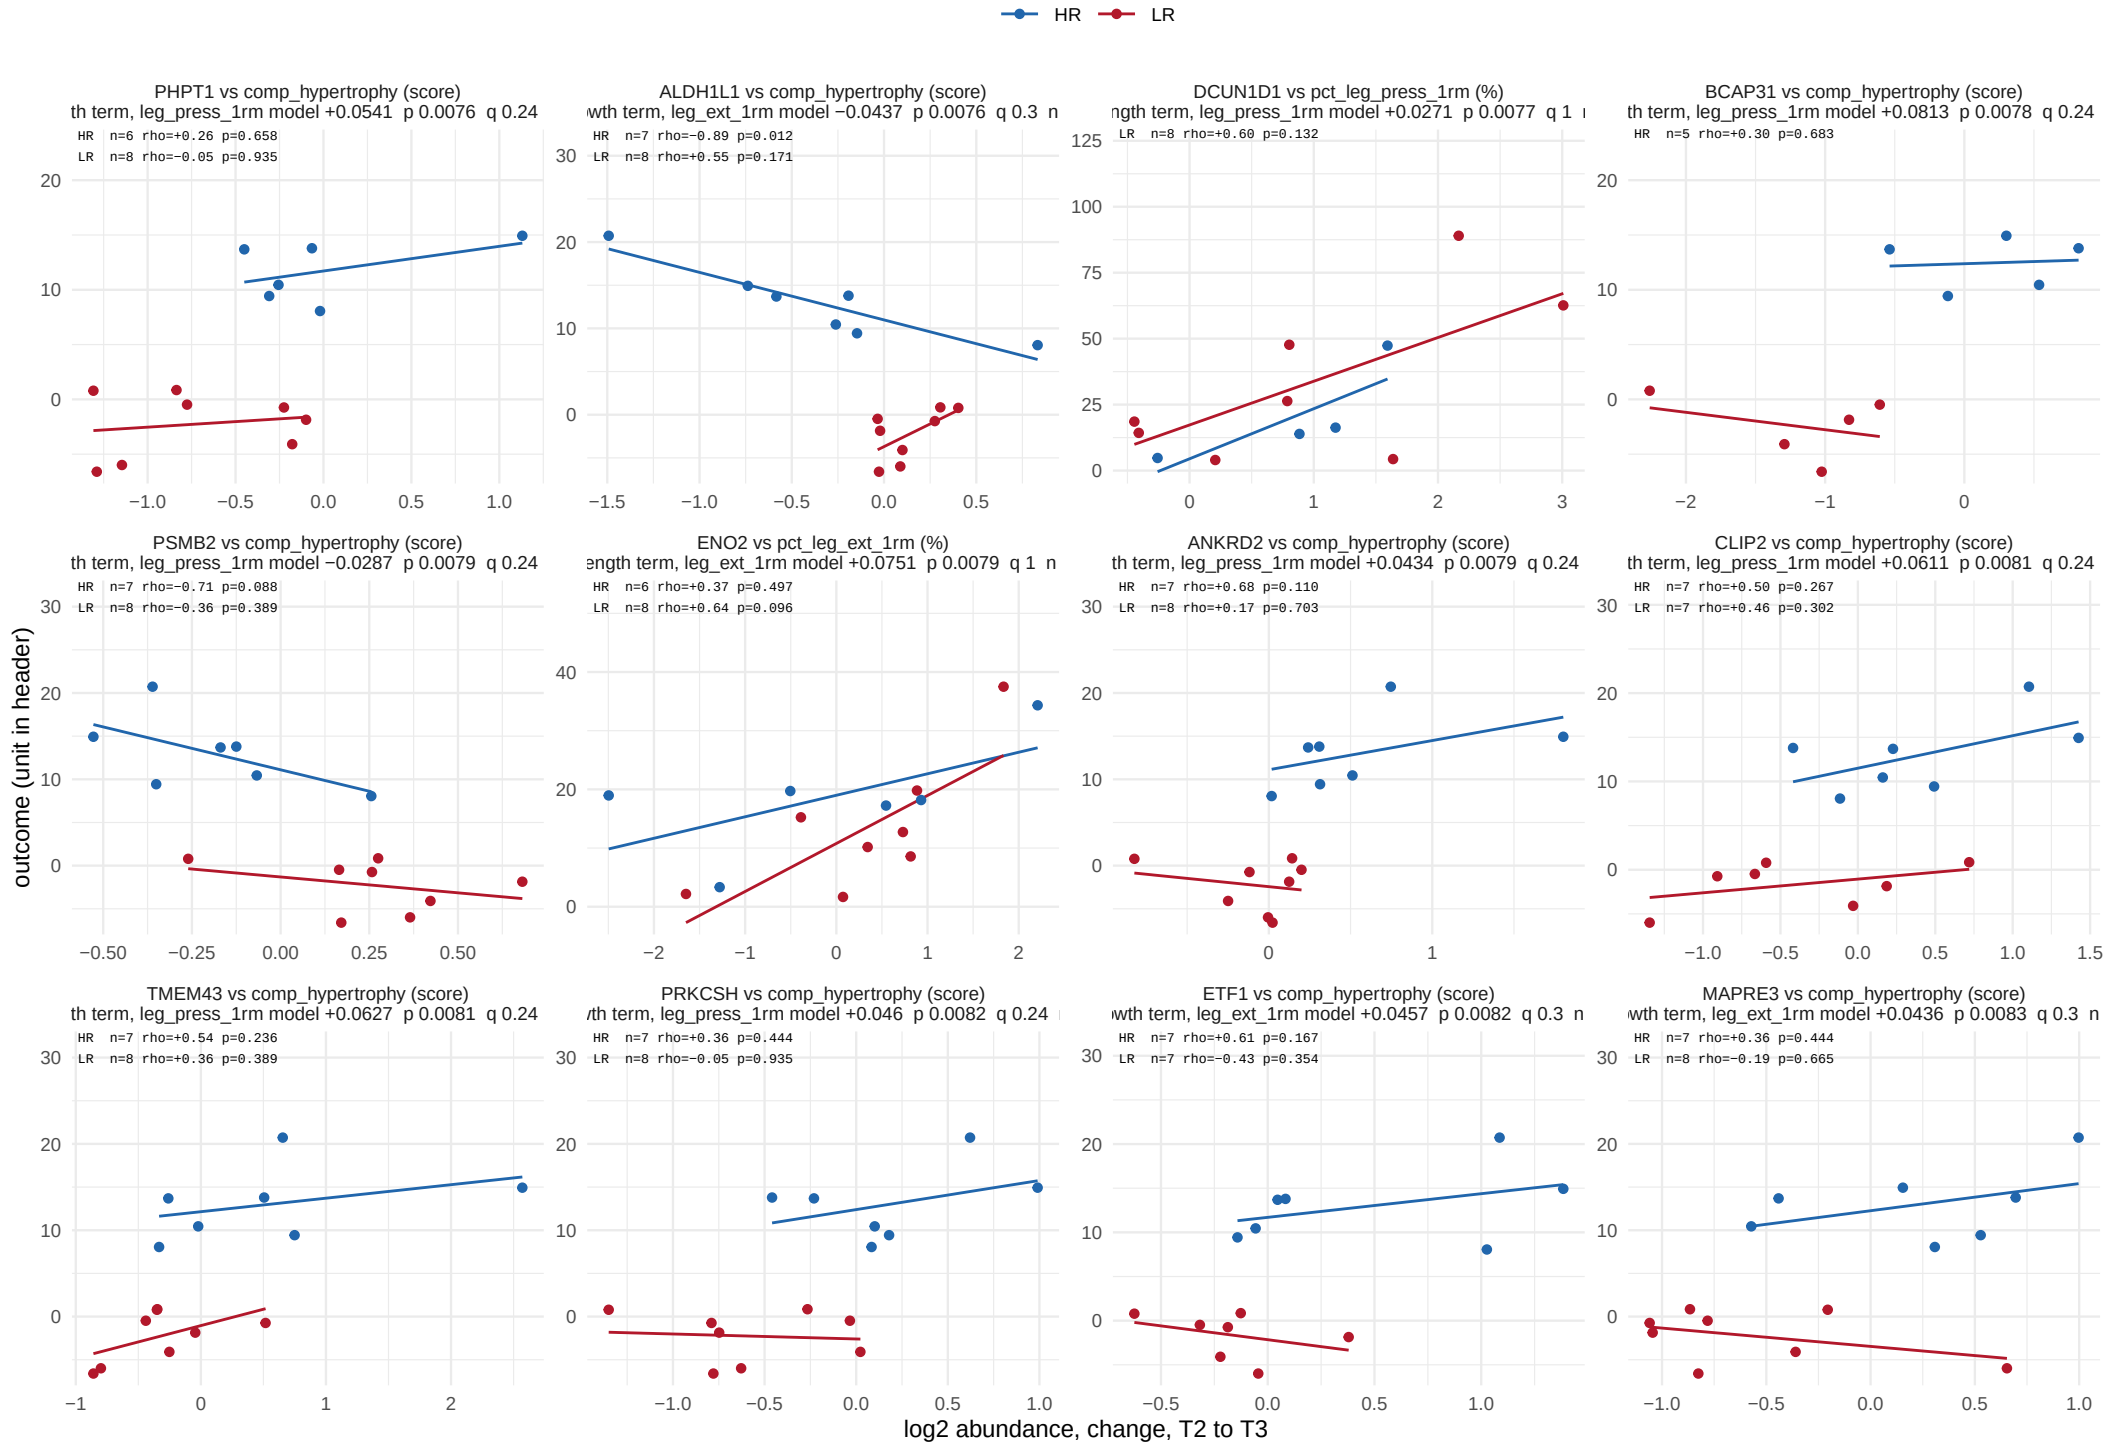

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.


Two predictor, acute window

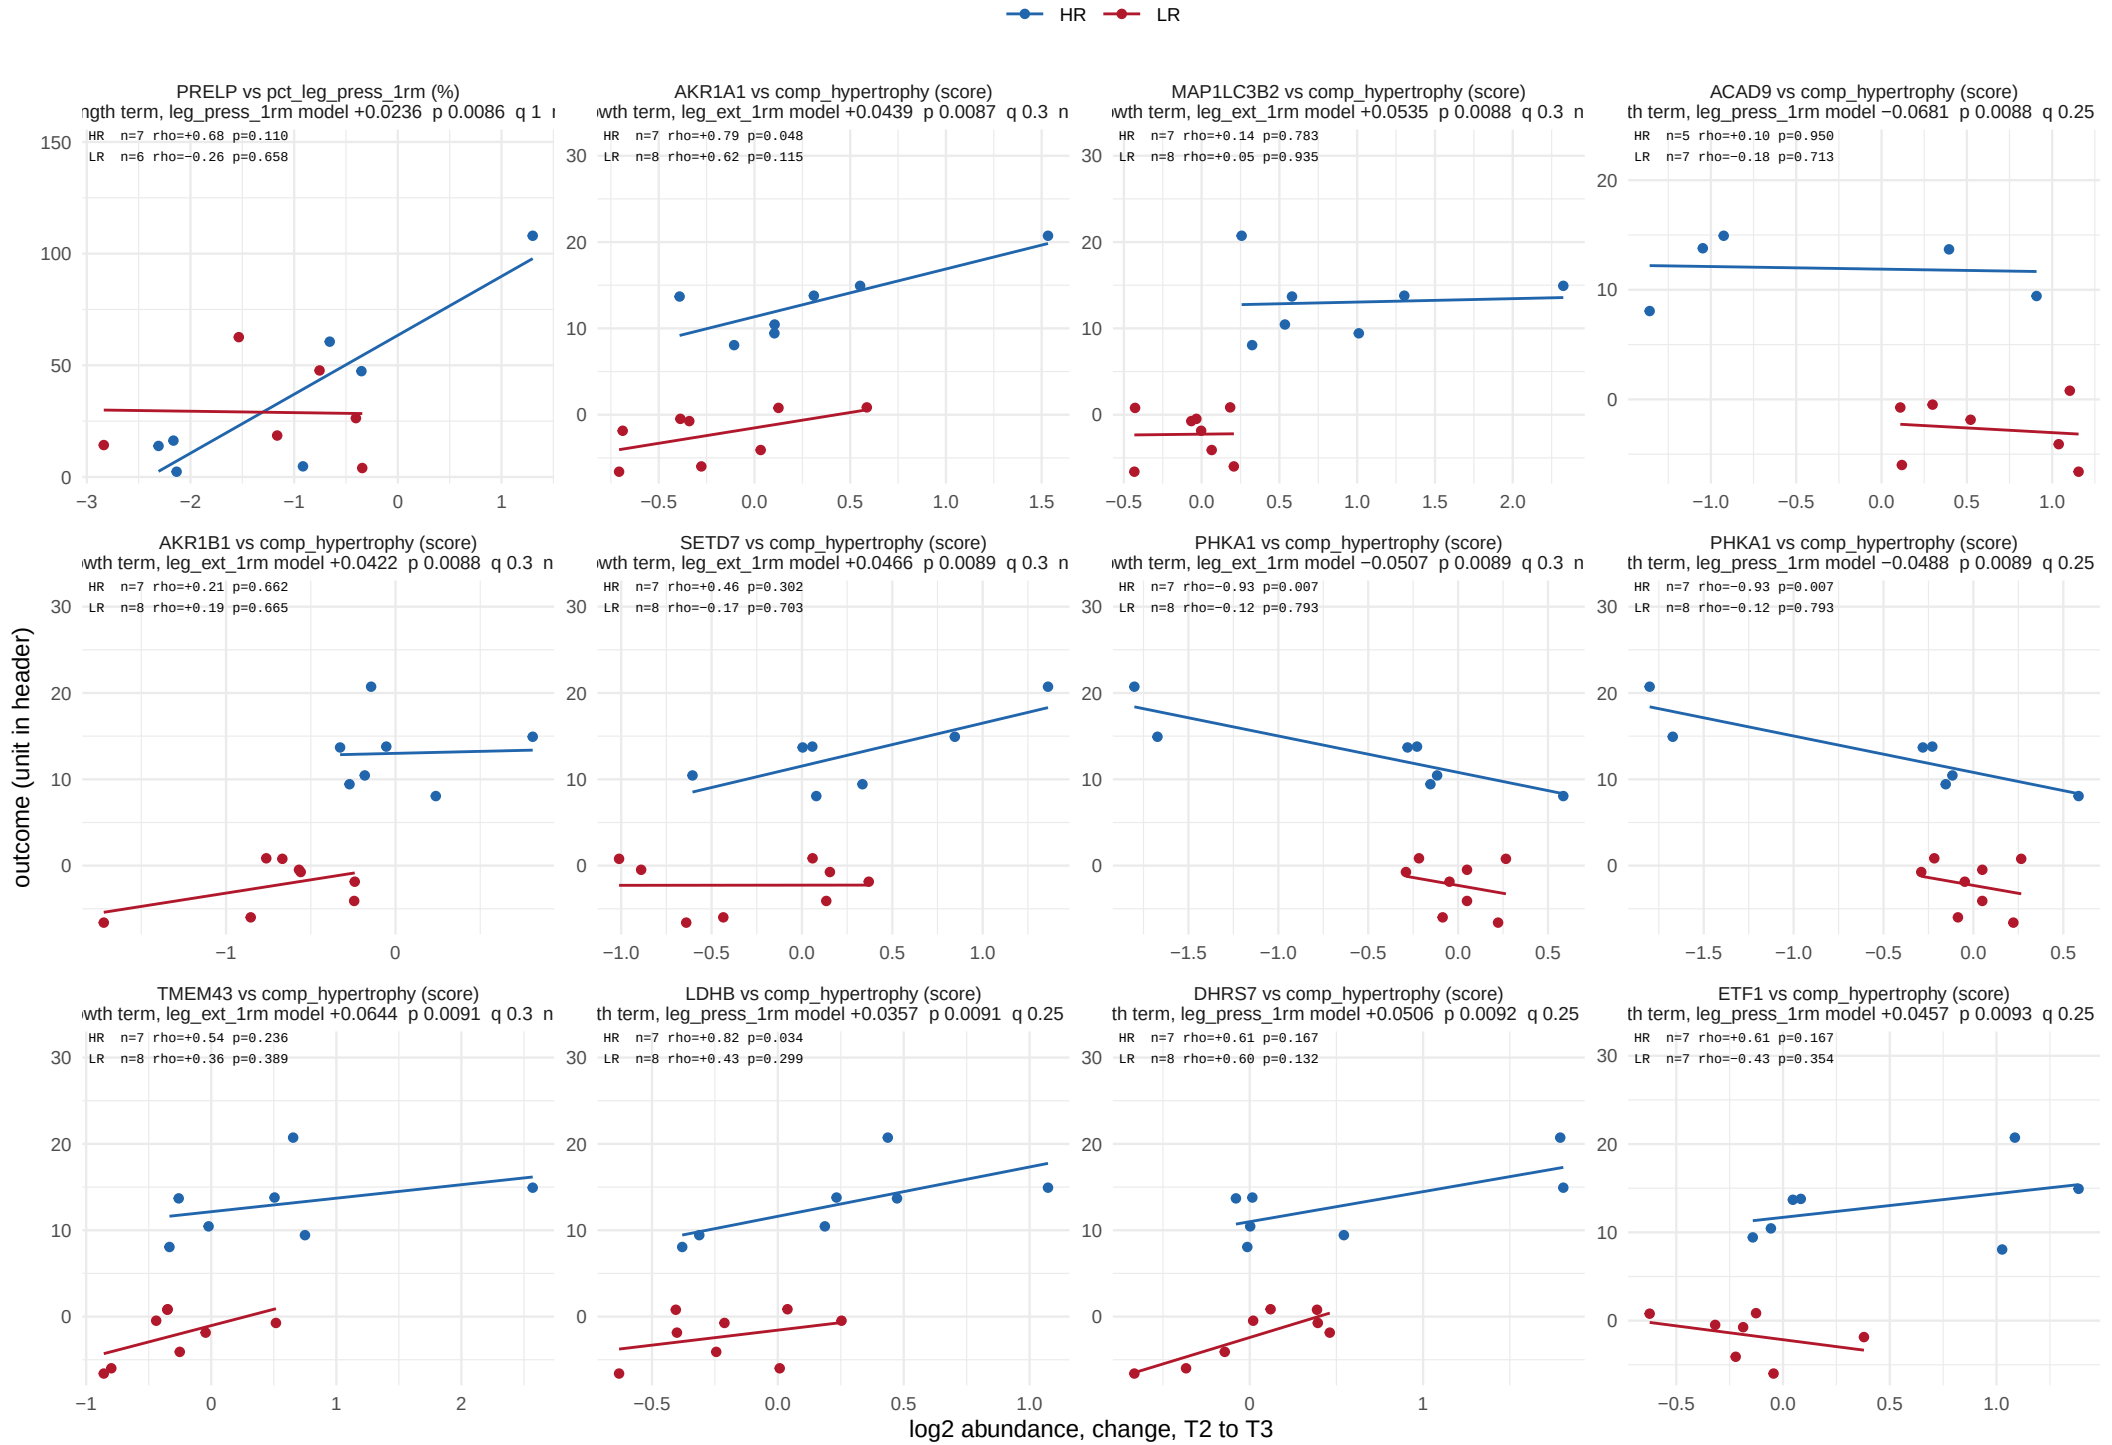

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, acute window


465 of 5806 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 10 of 39.

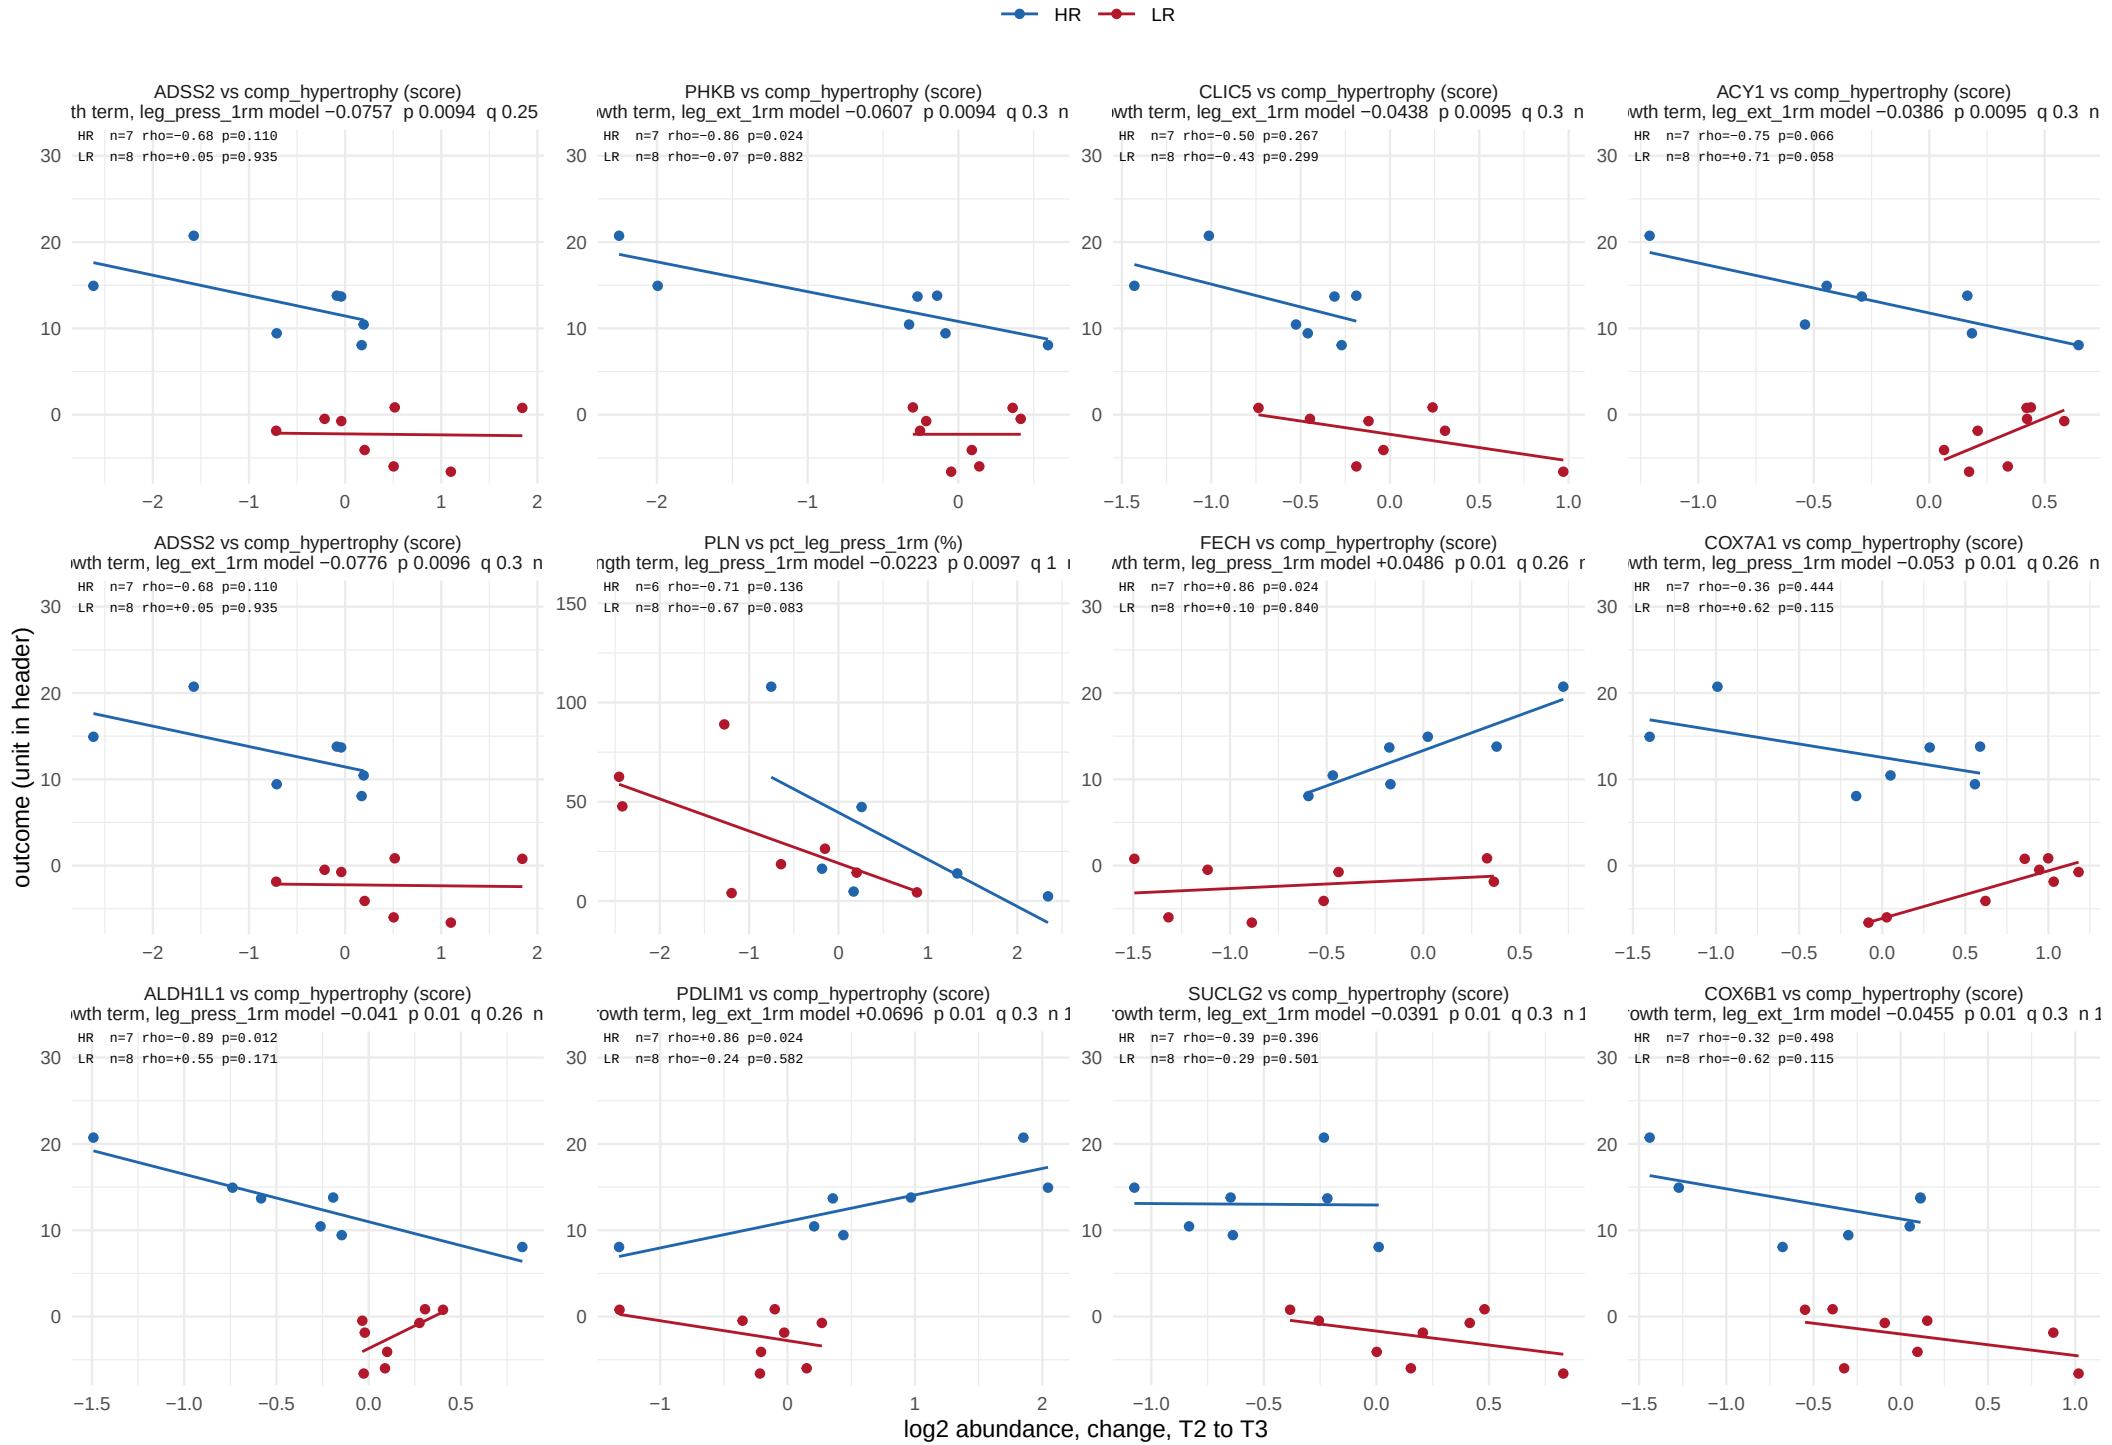

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.


Two predictor, acute window

465 of 5806 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 11 of 39.

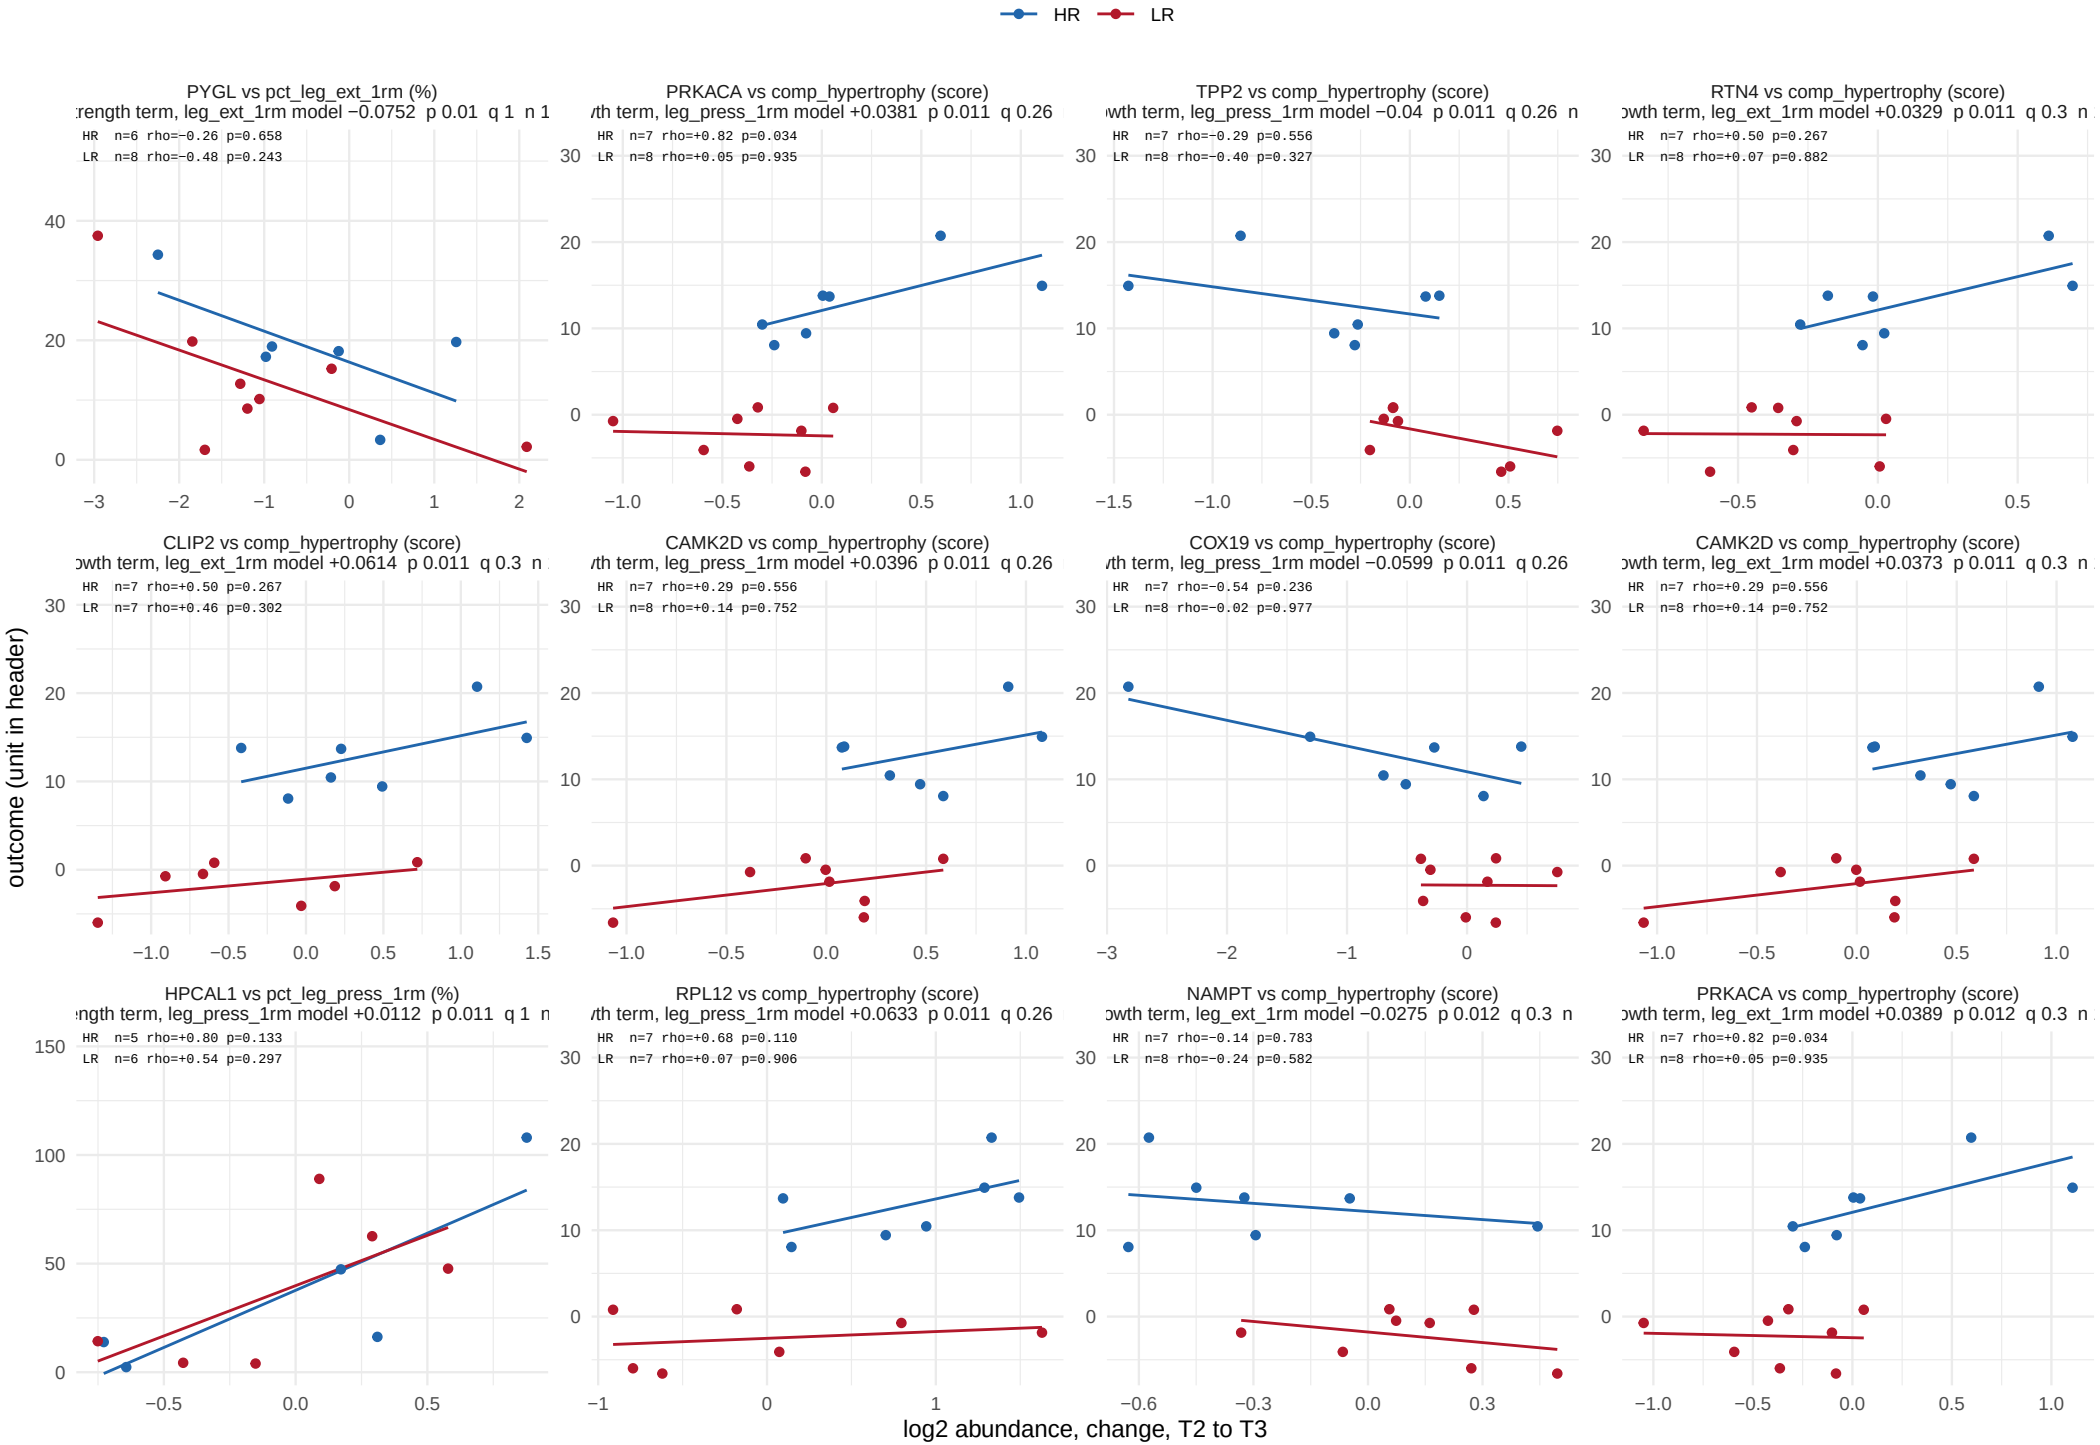

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.


Two predictor, acute window

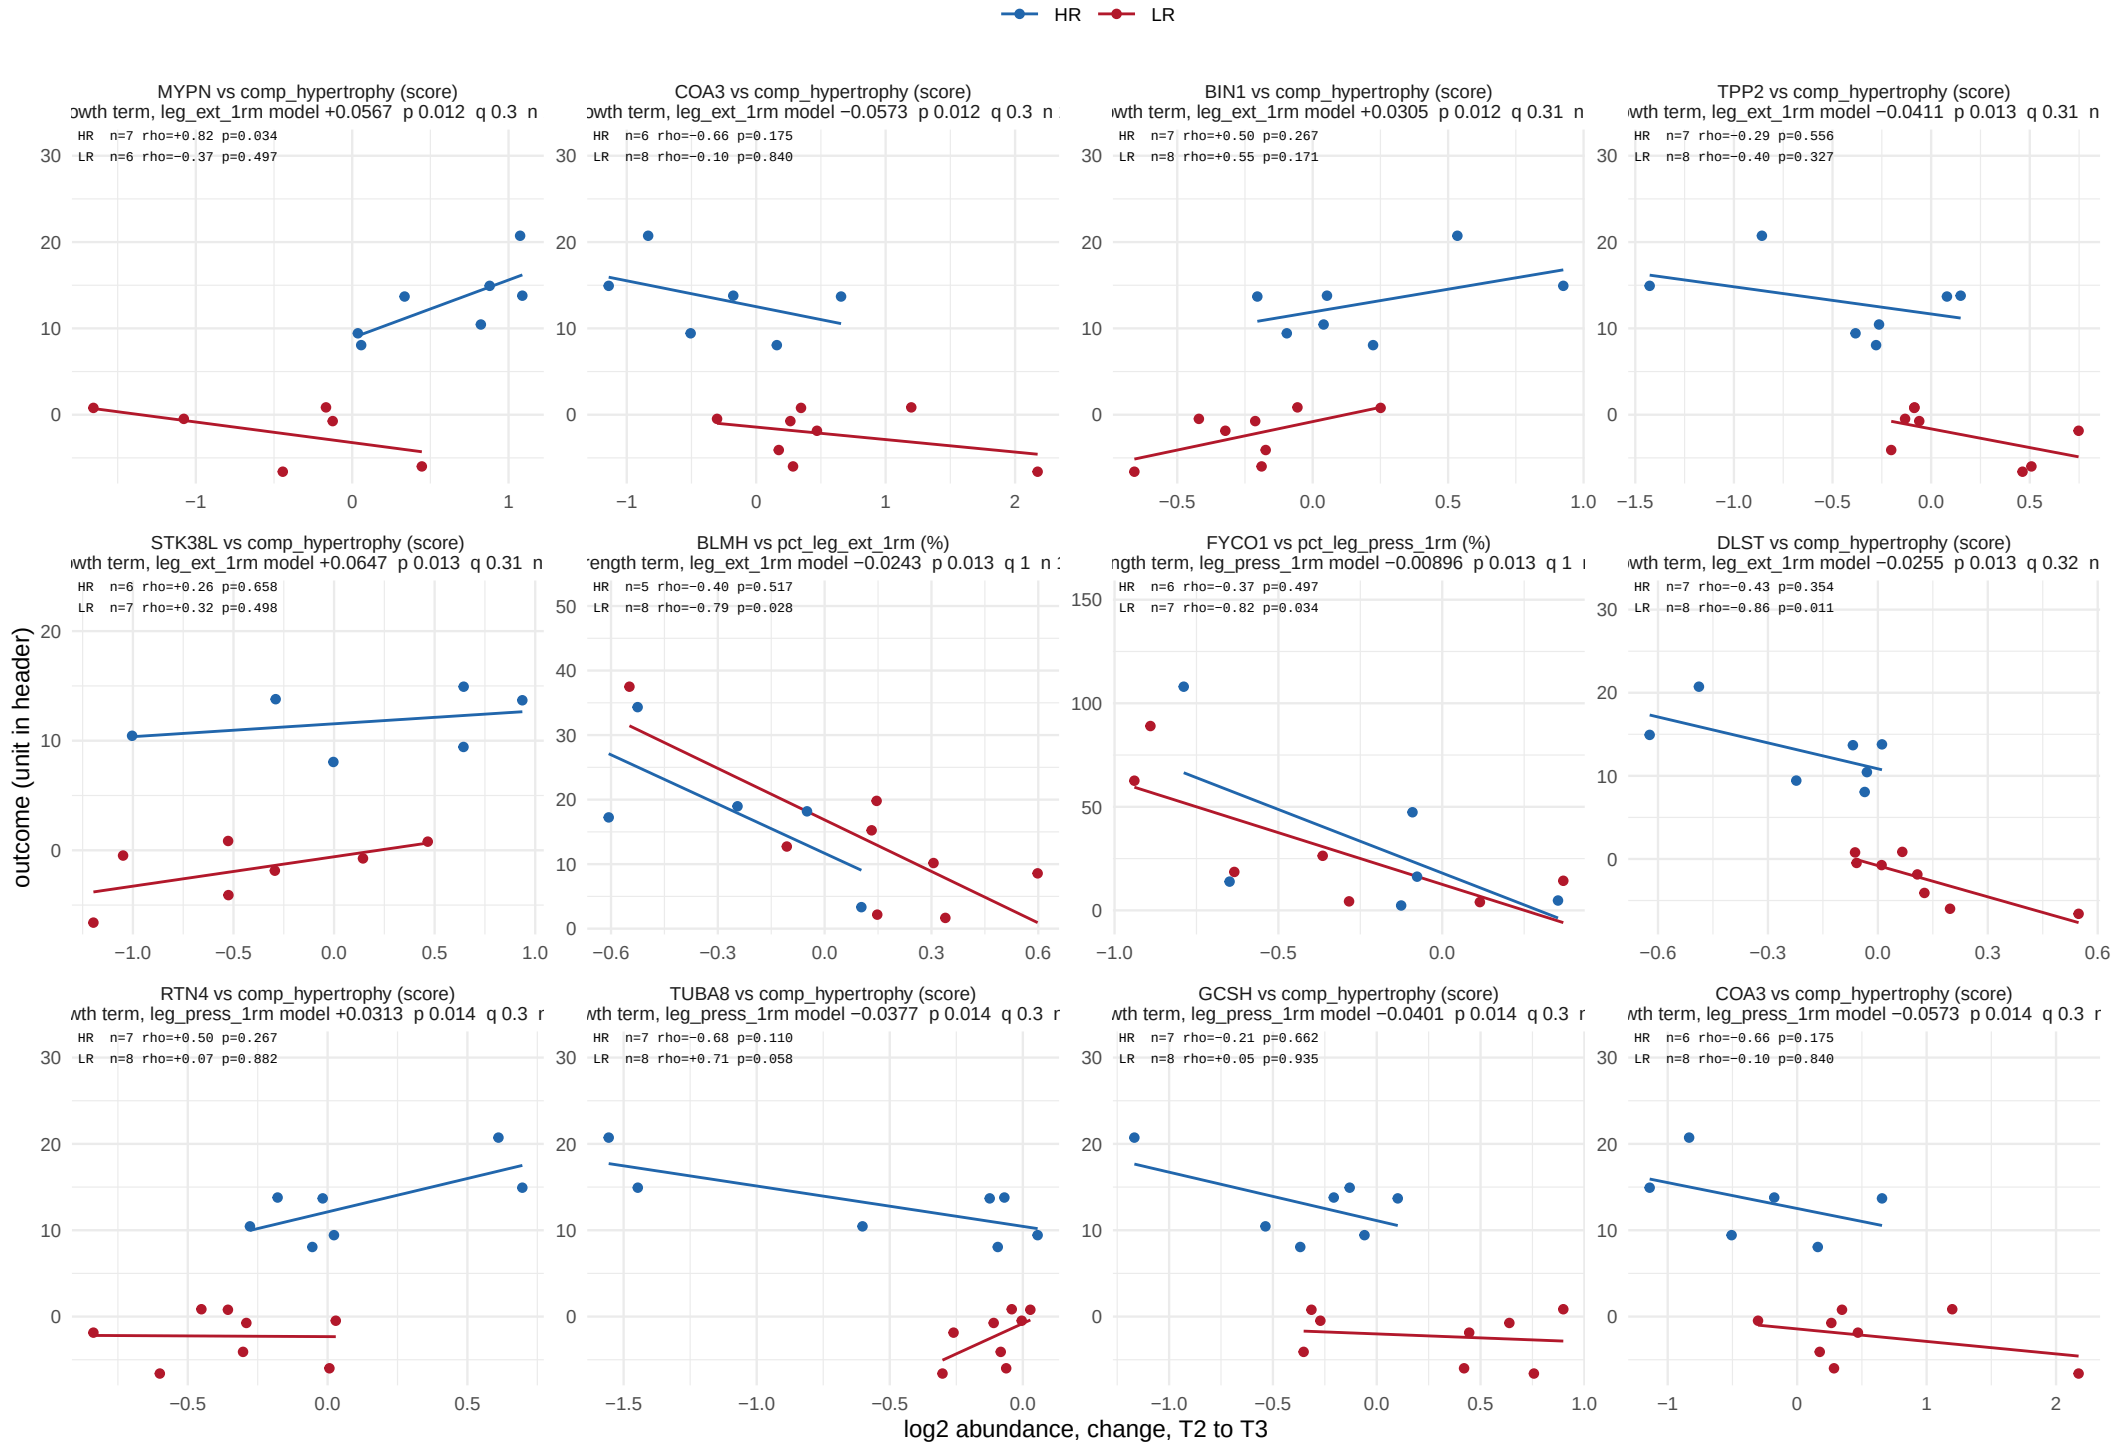

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, acute window


465 of 5806 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 13 of 39.

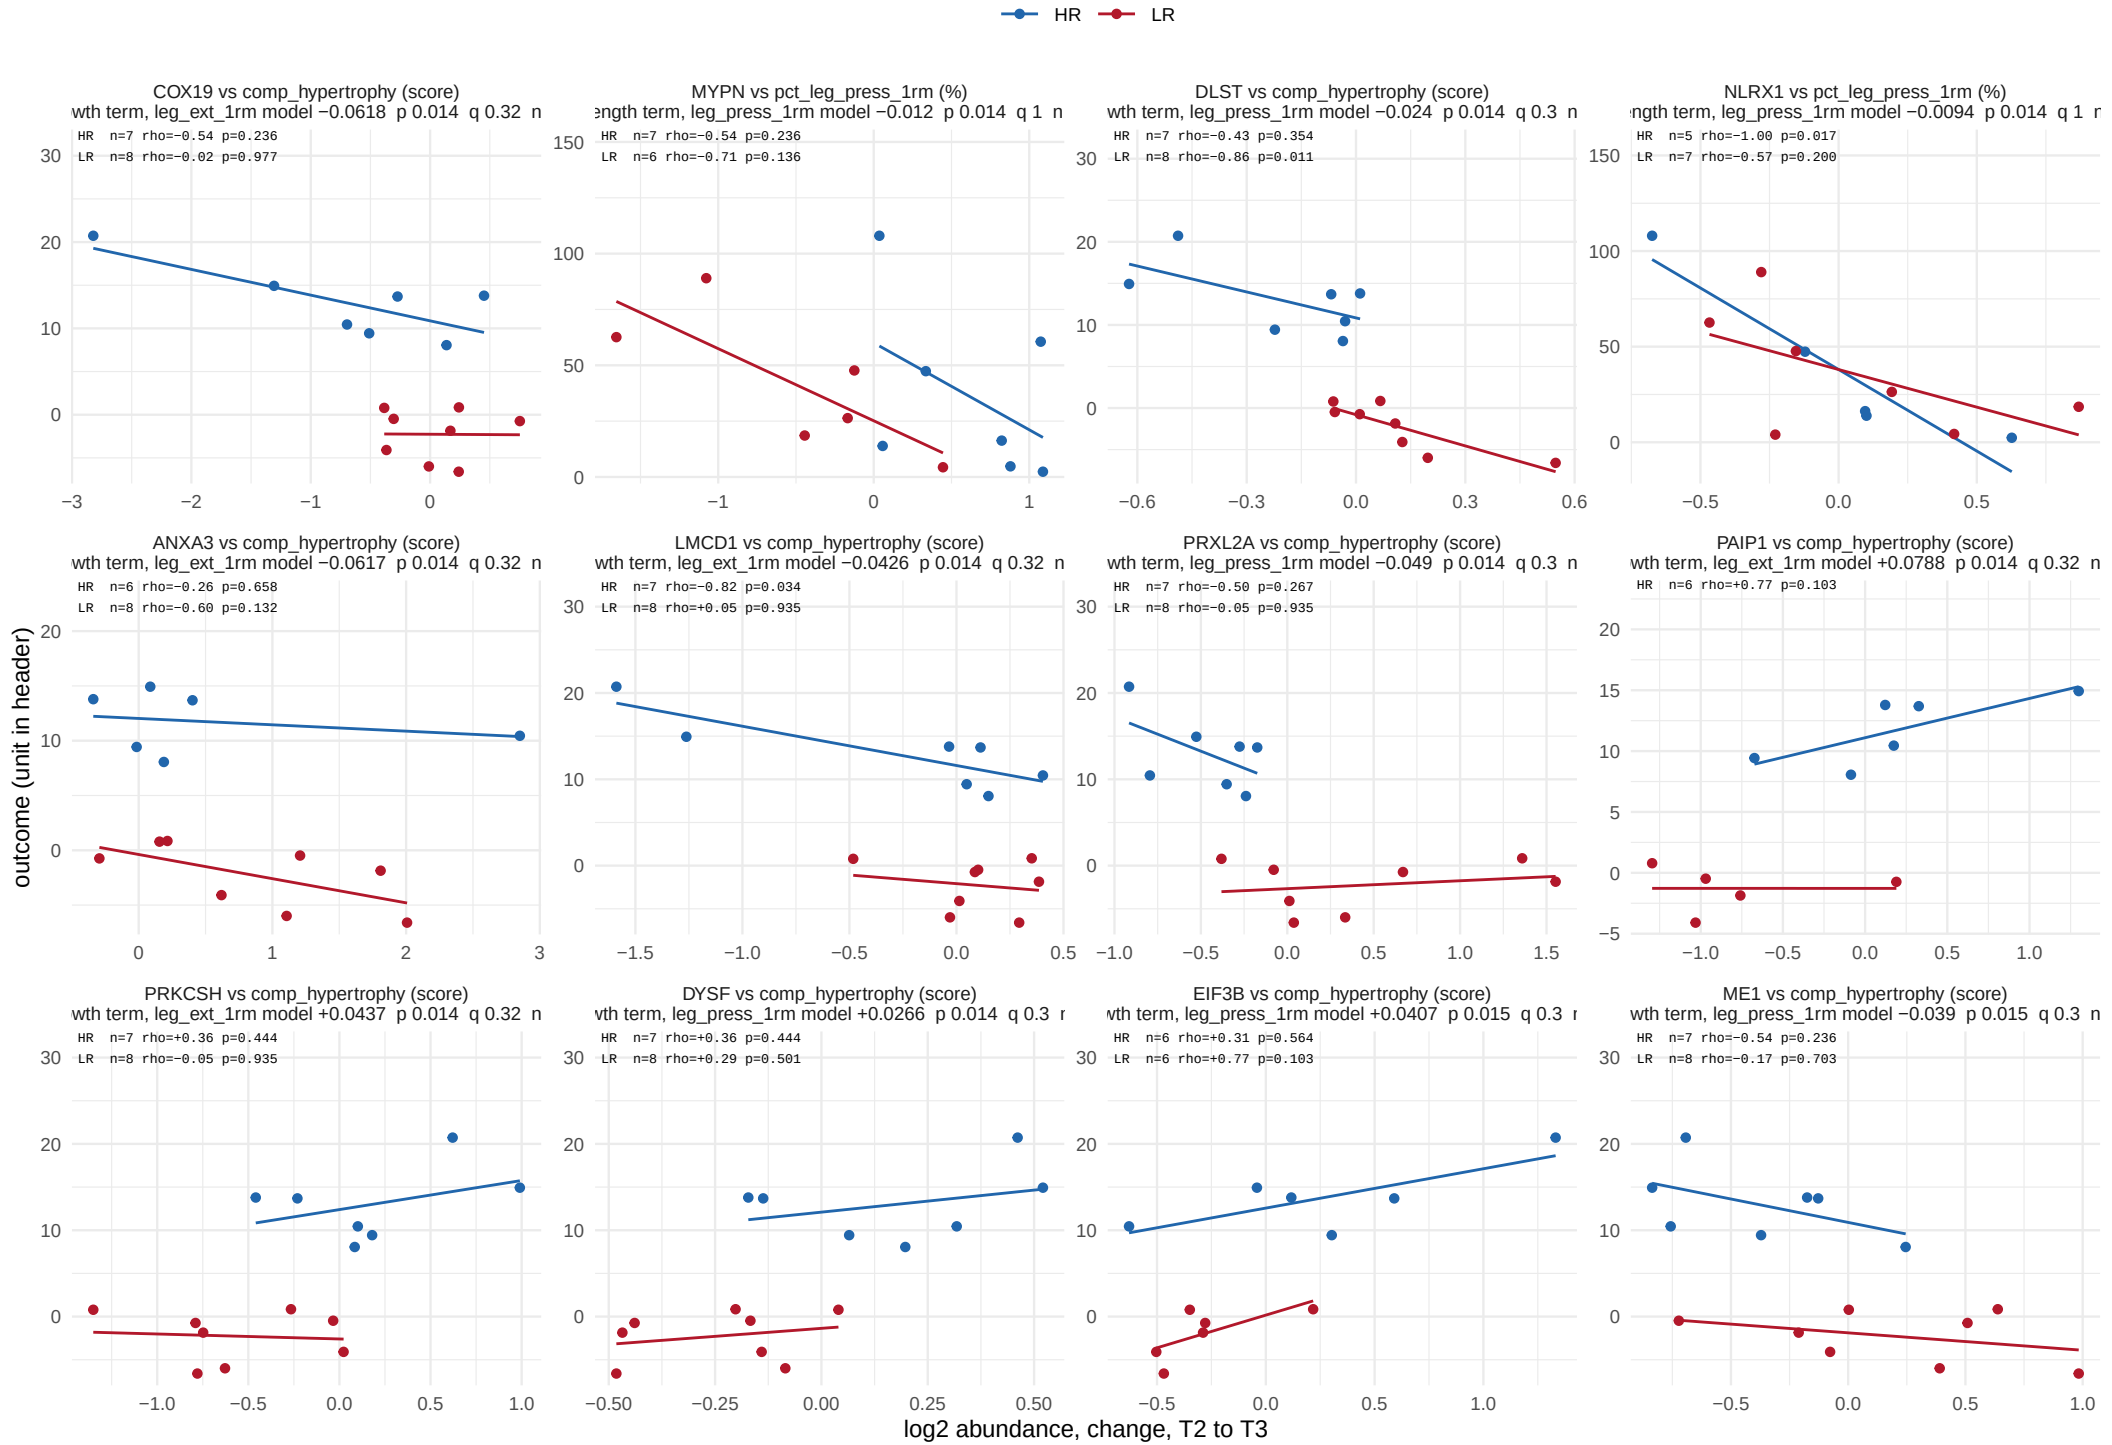

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, acute window


465 of 5806 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 14 of 39.

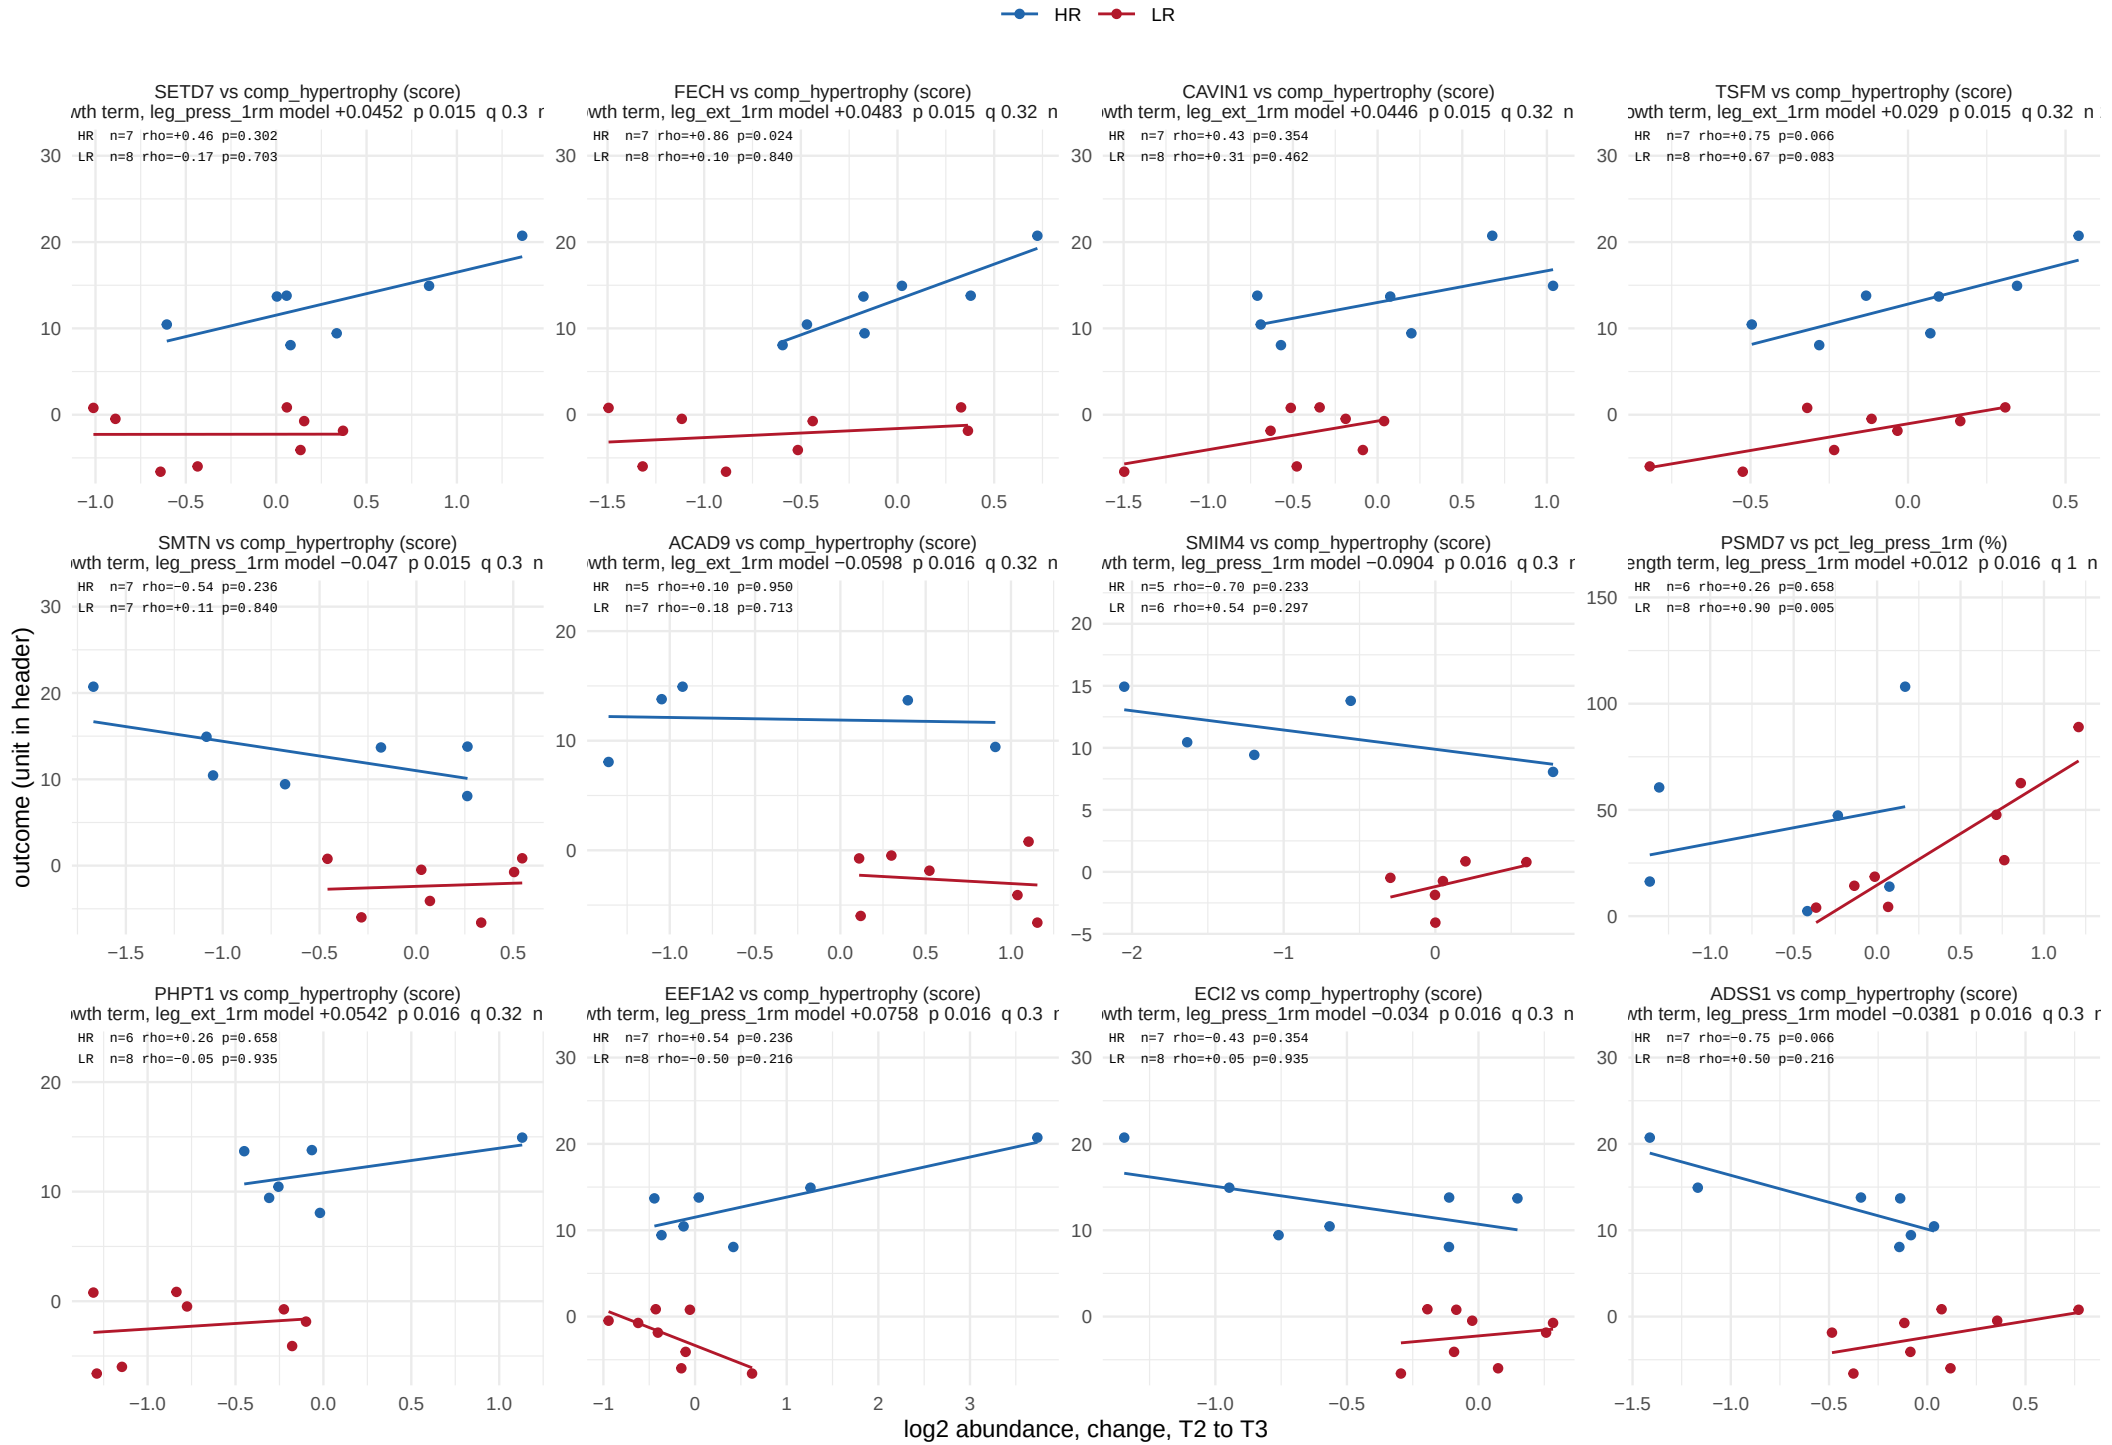

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.


Two predictor, acute window

465 of 5806 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 15 of 39.

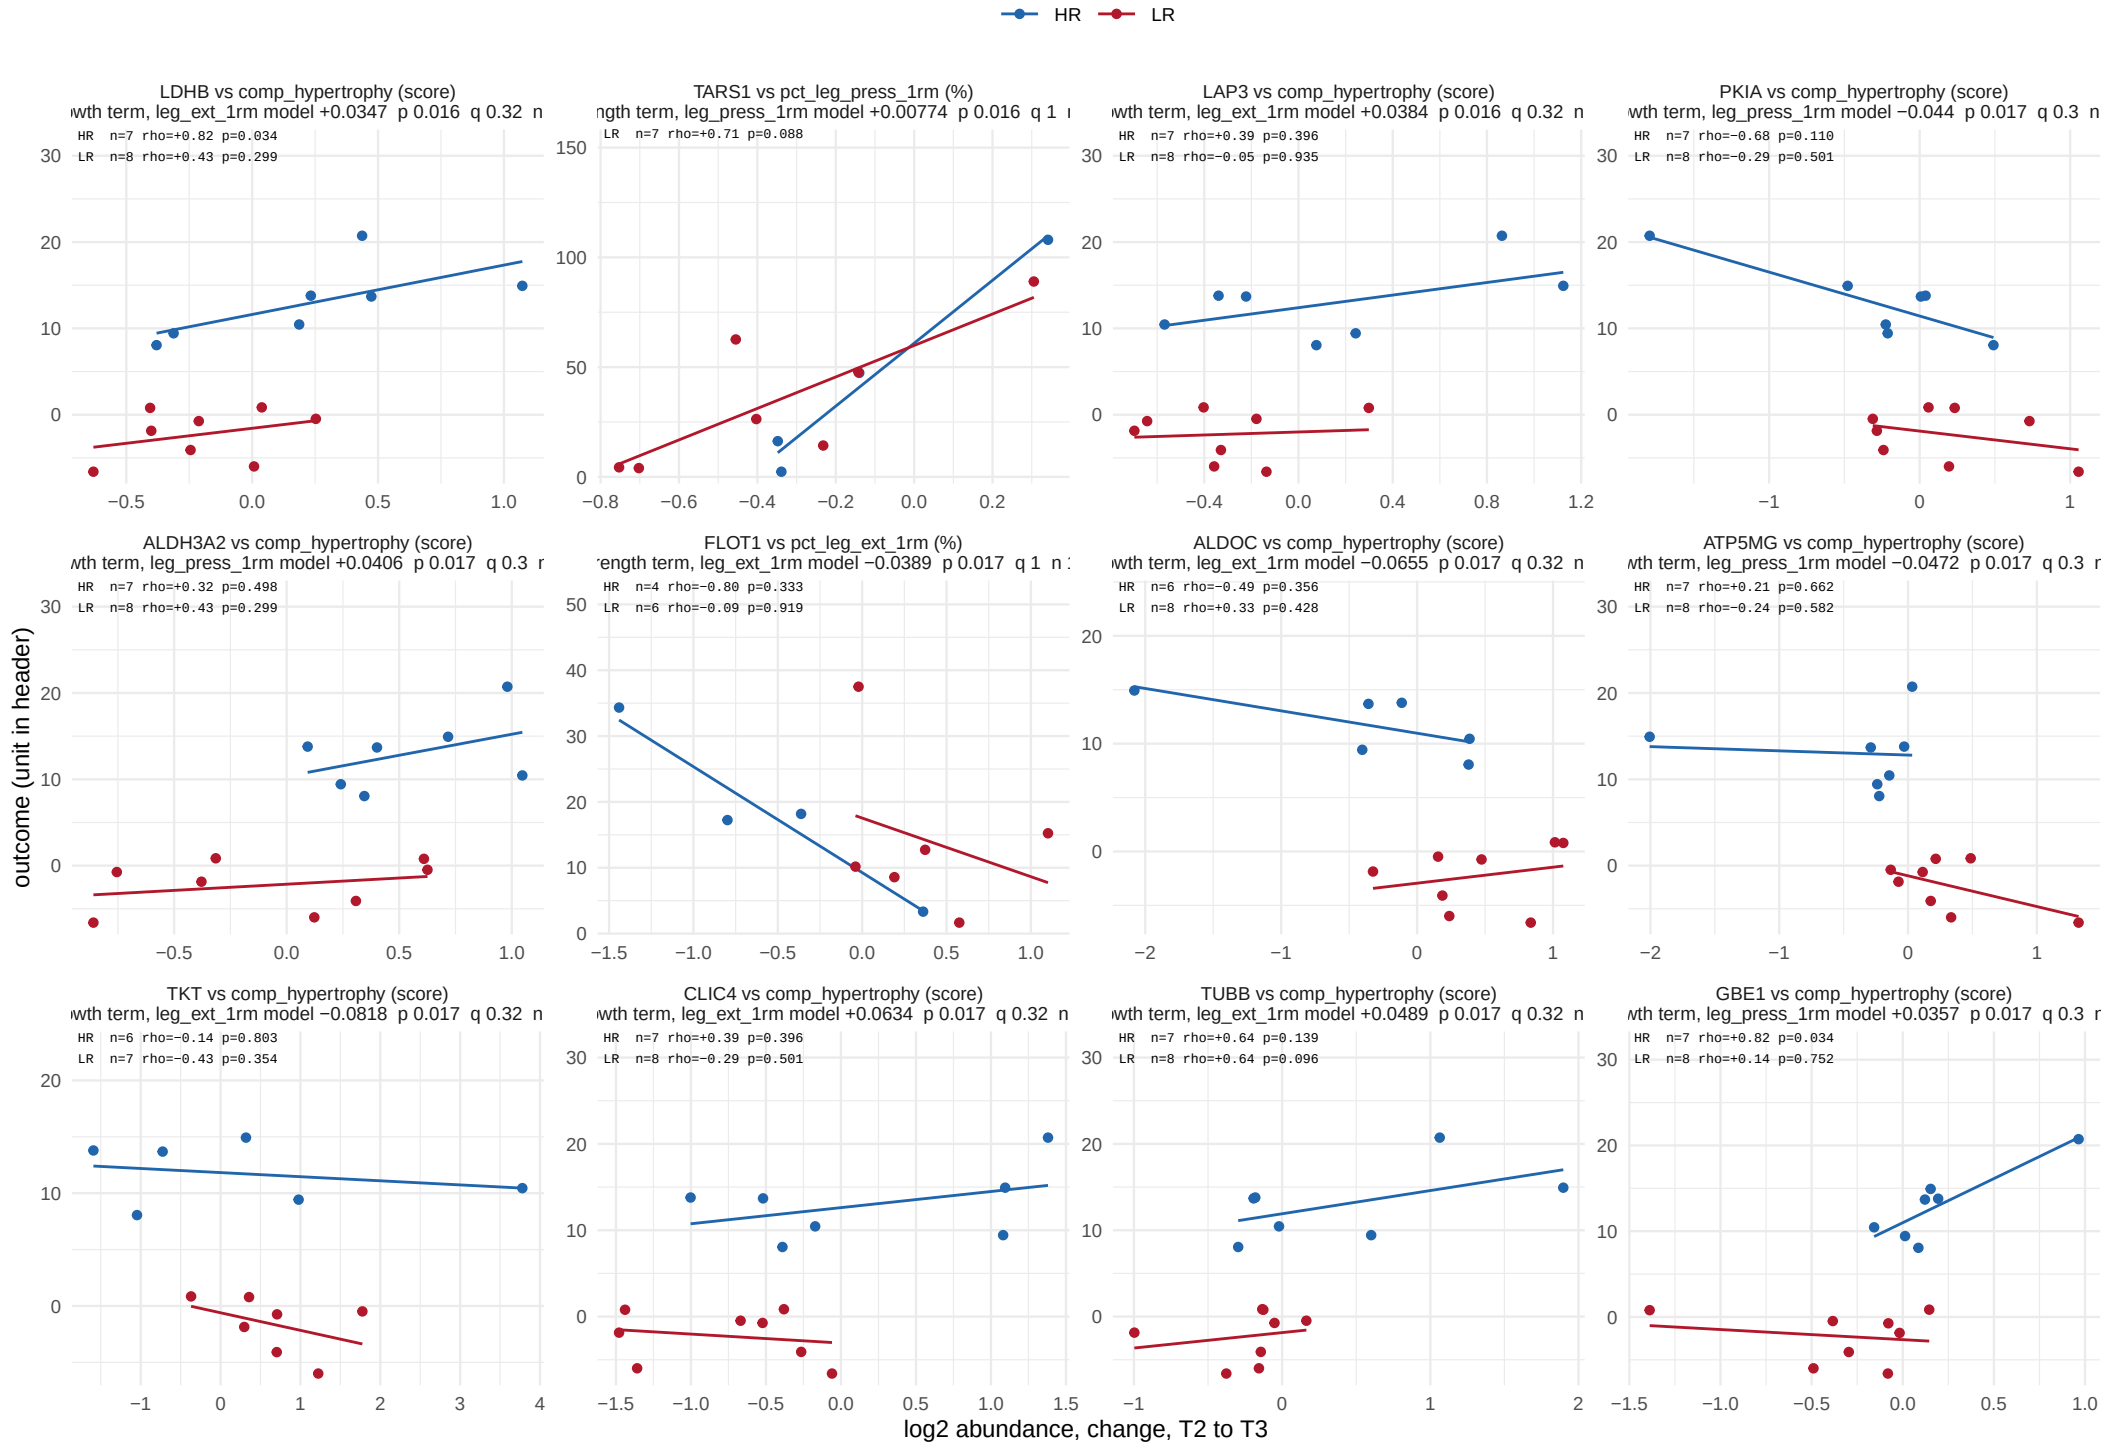

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.


Two predictor, acute window

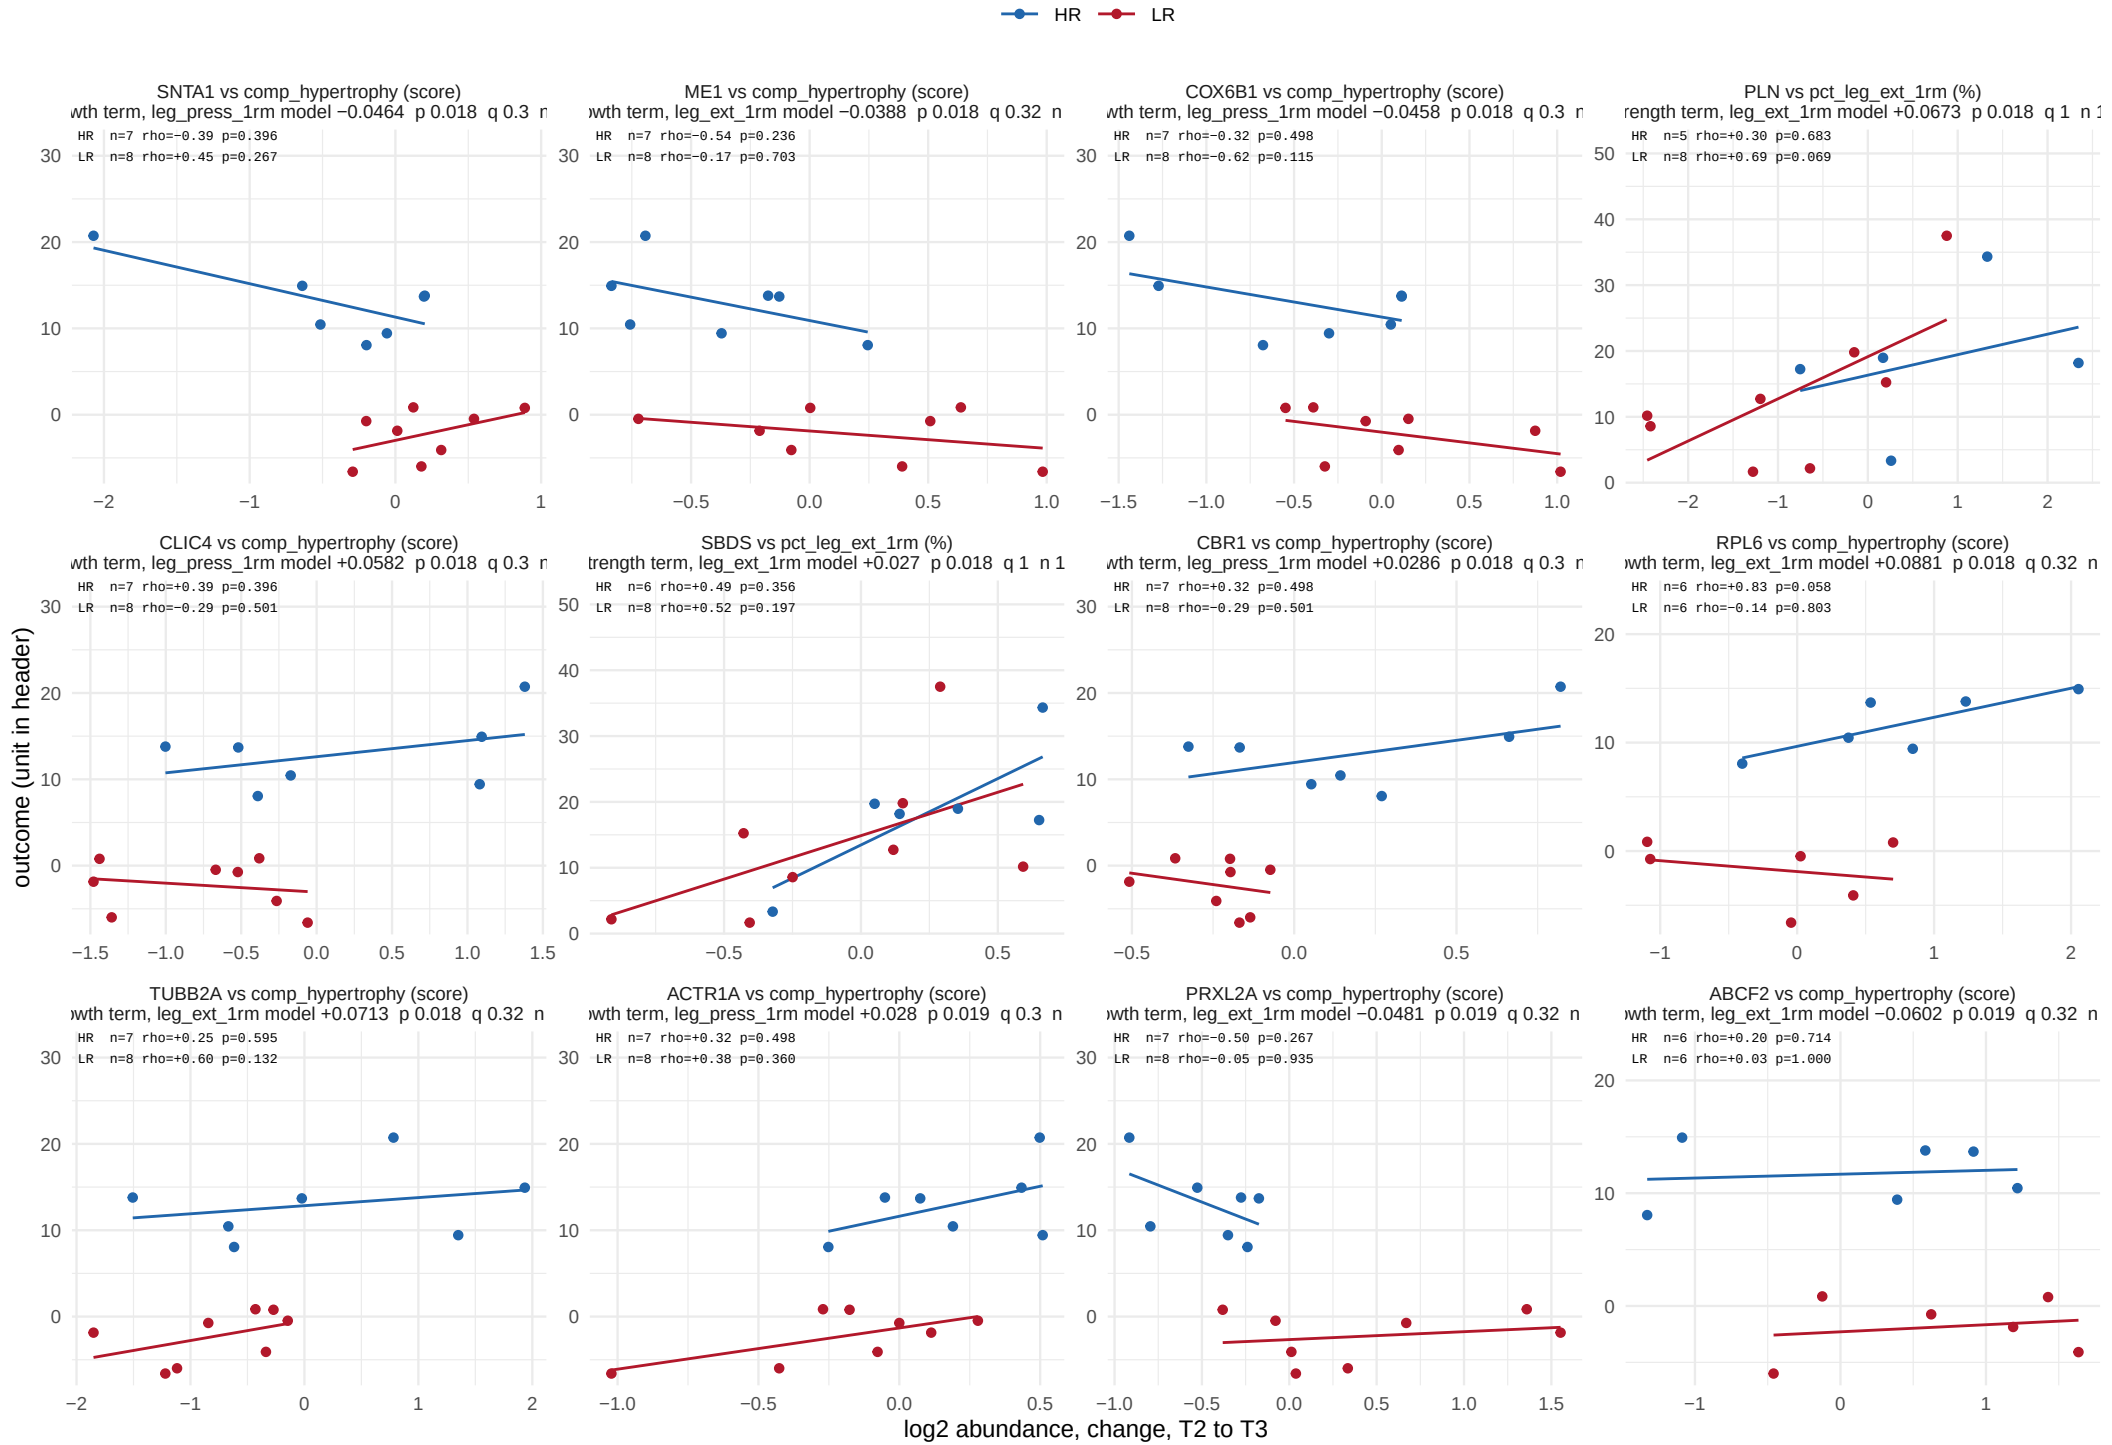

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, acute window


465 of 5806 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 17 of 39.

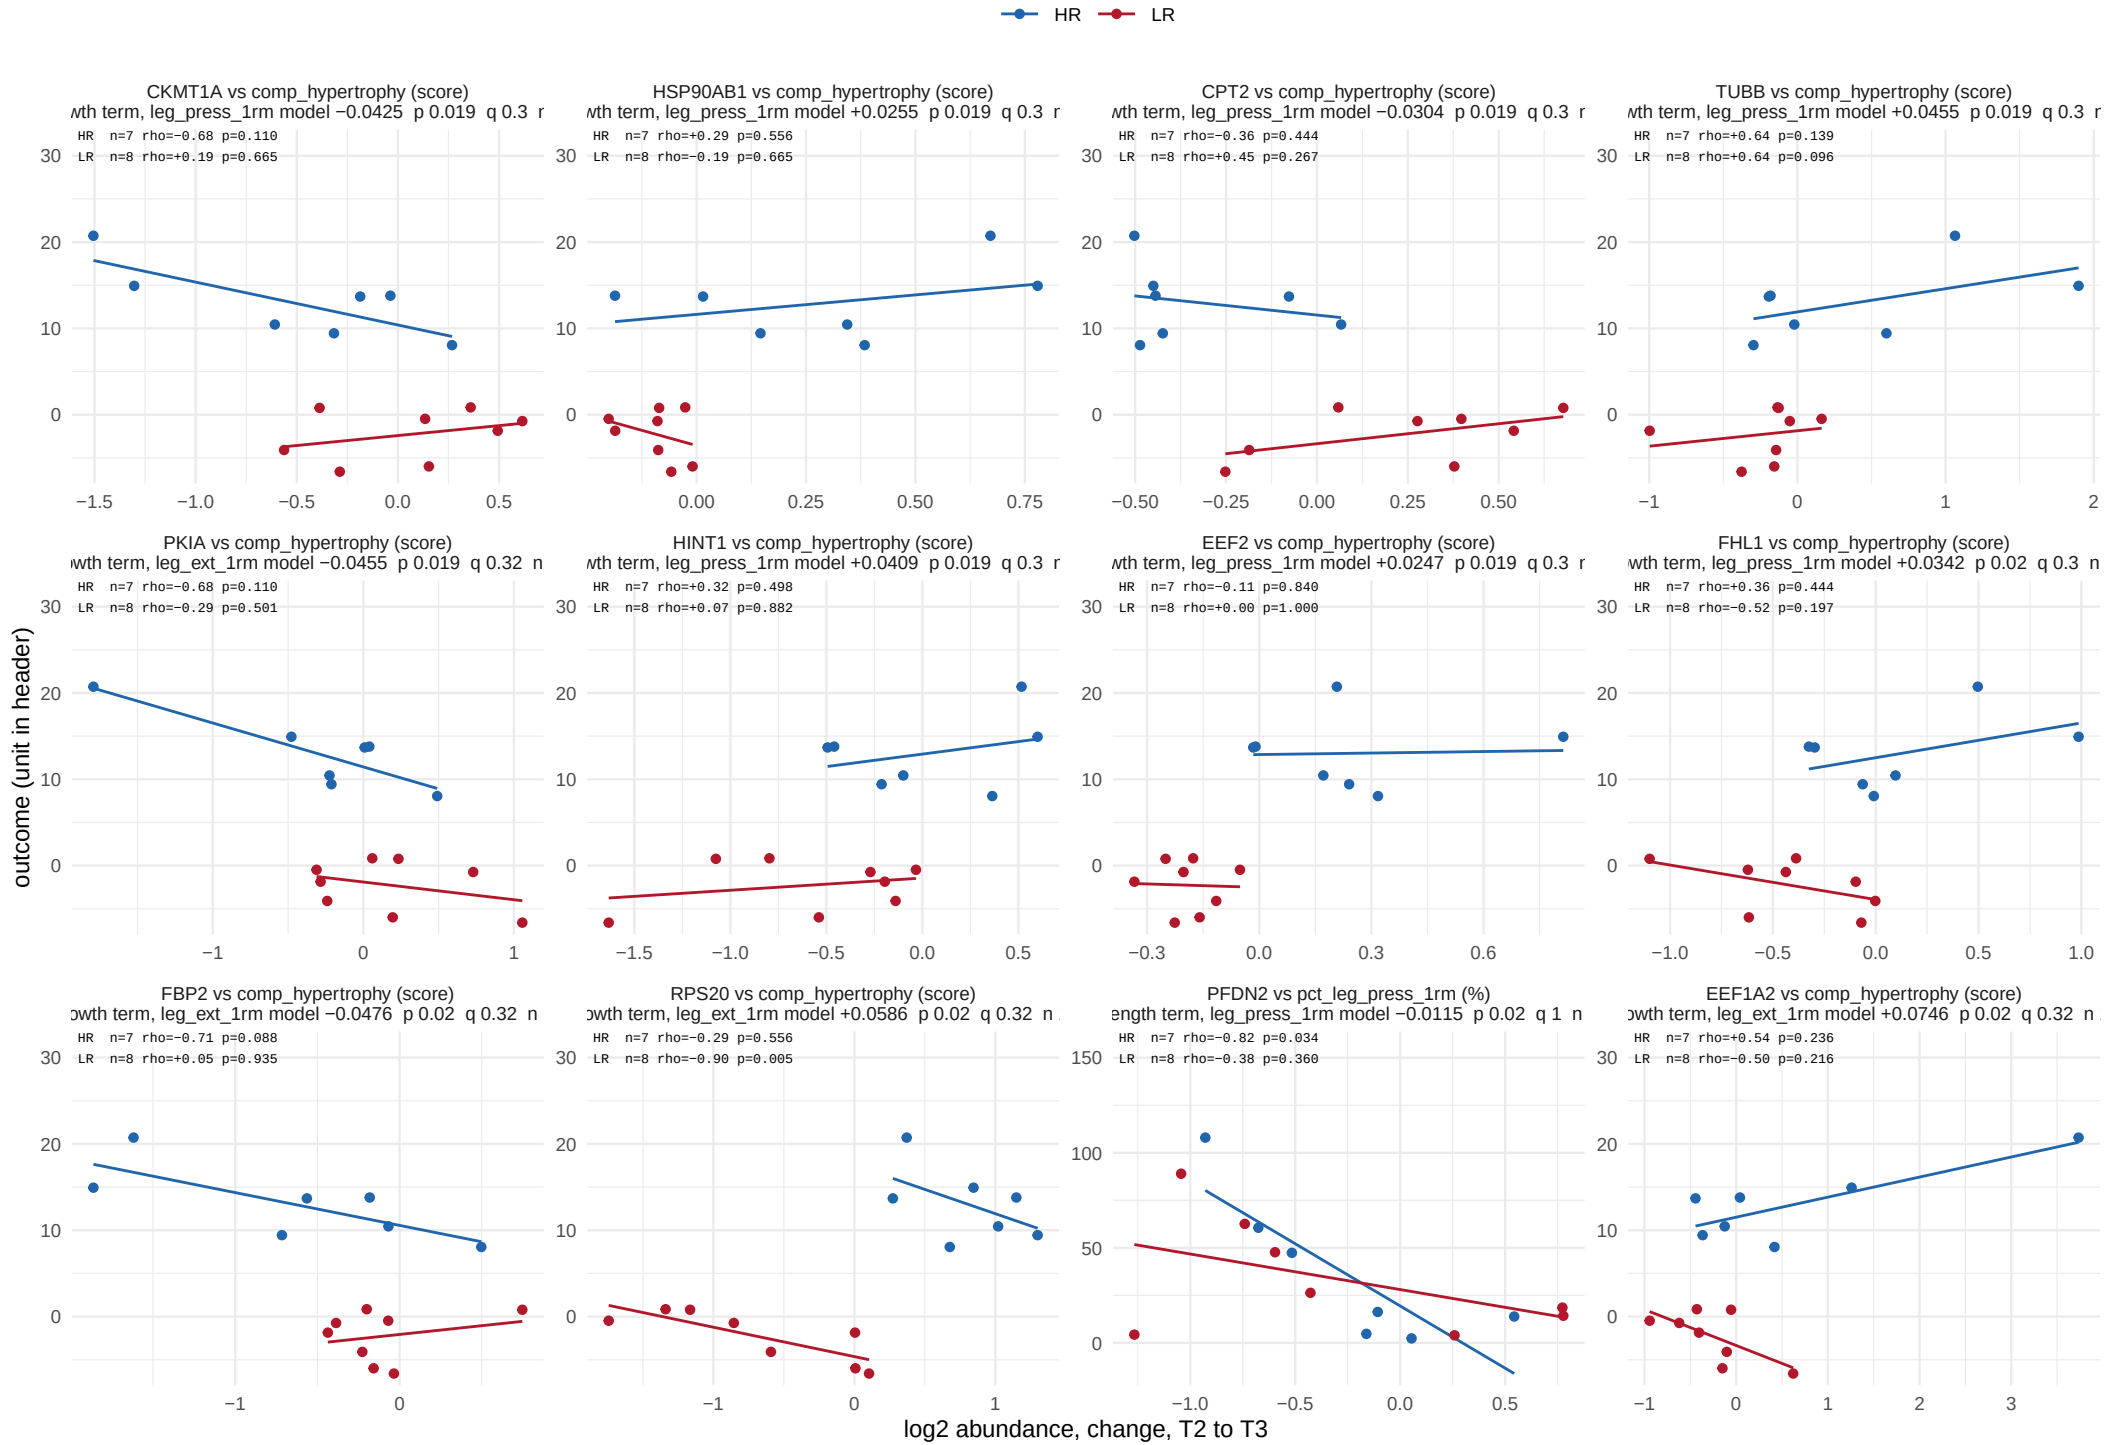

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, acute window


465 of 5806 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 18 of 39.

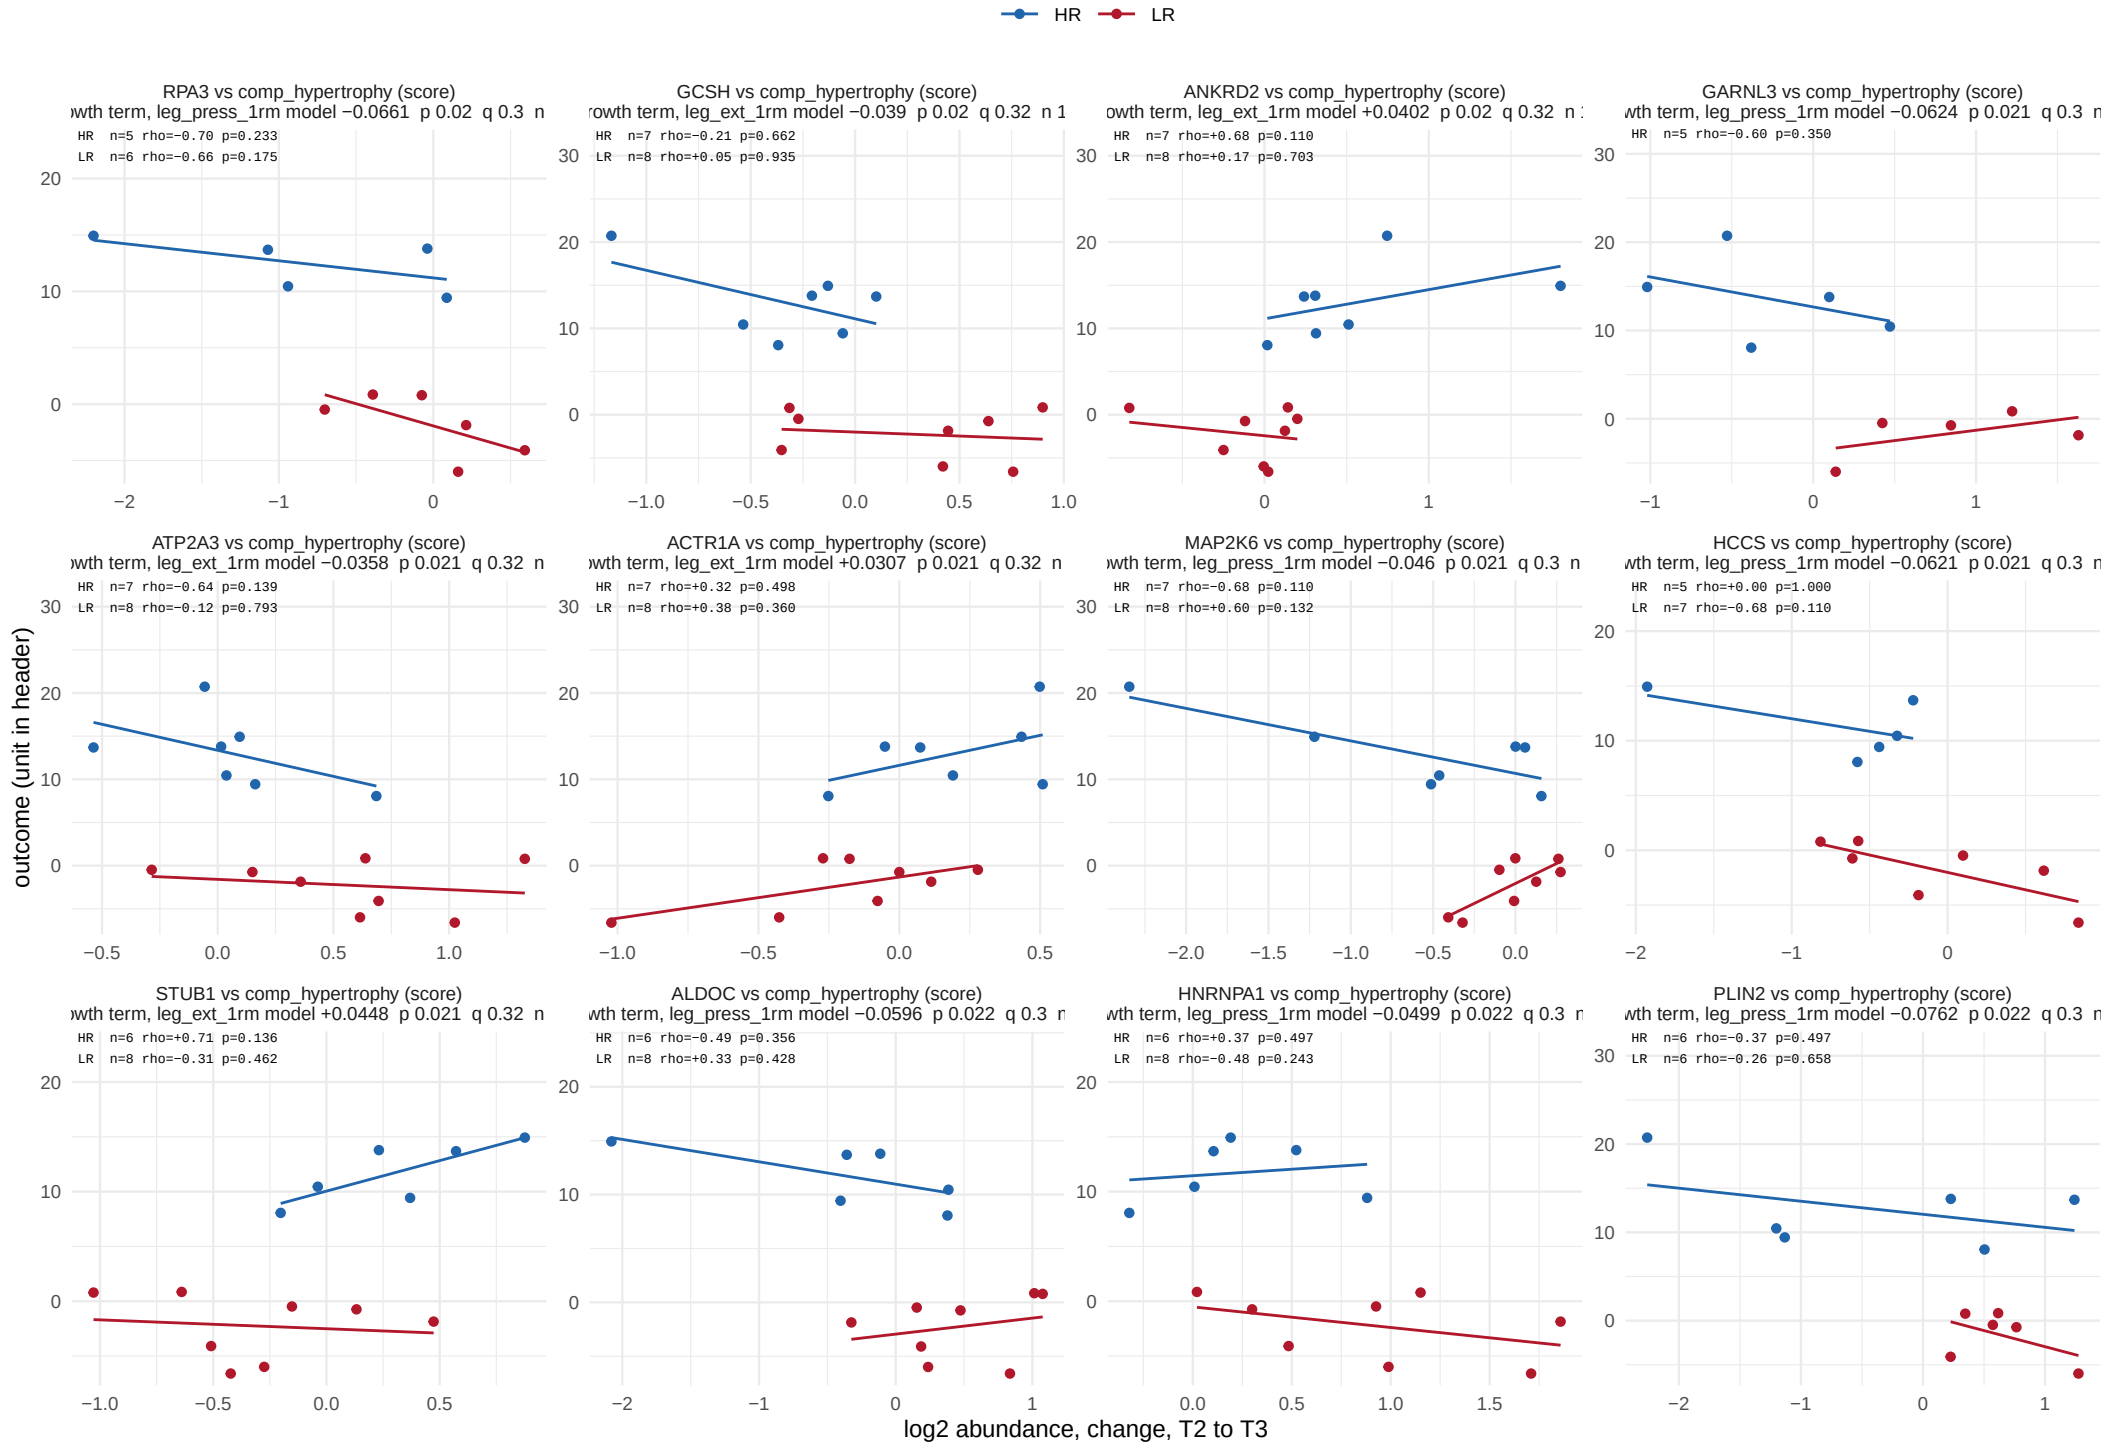

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, acute window


465 of 5806 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 19 of 39.

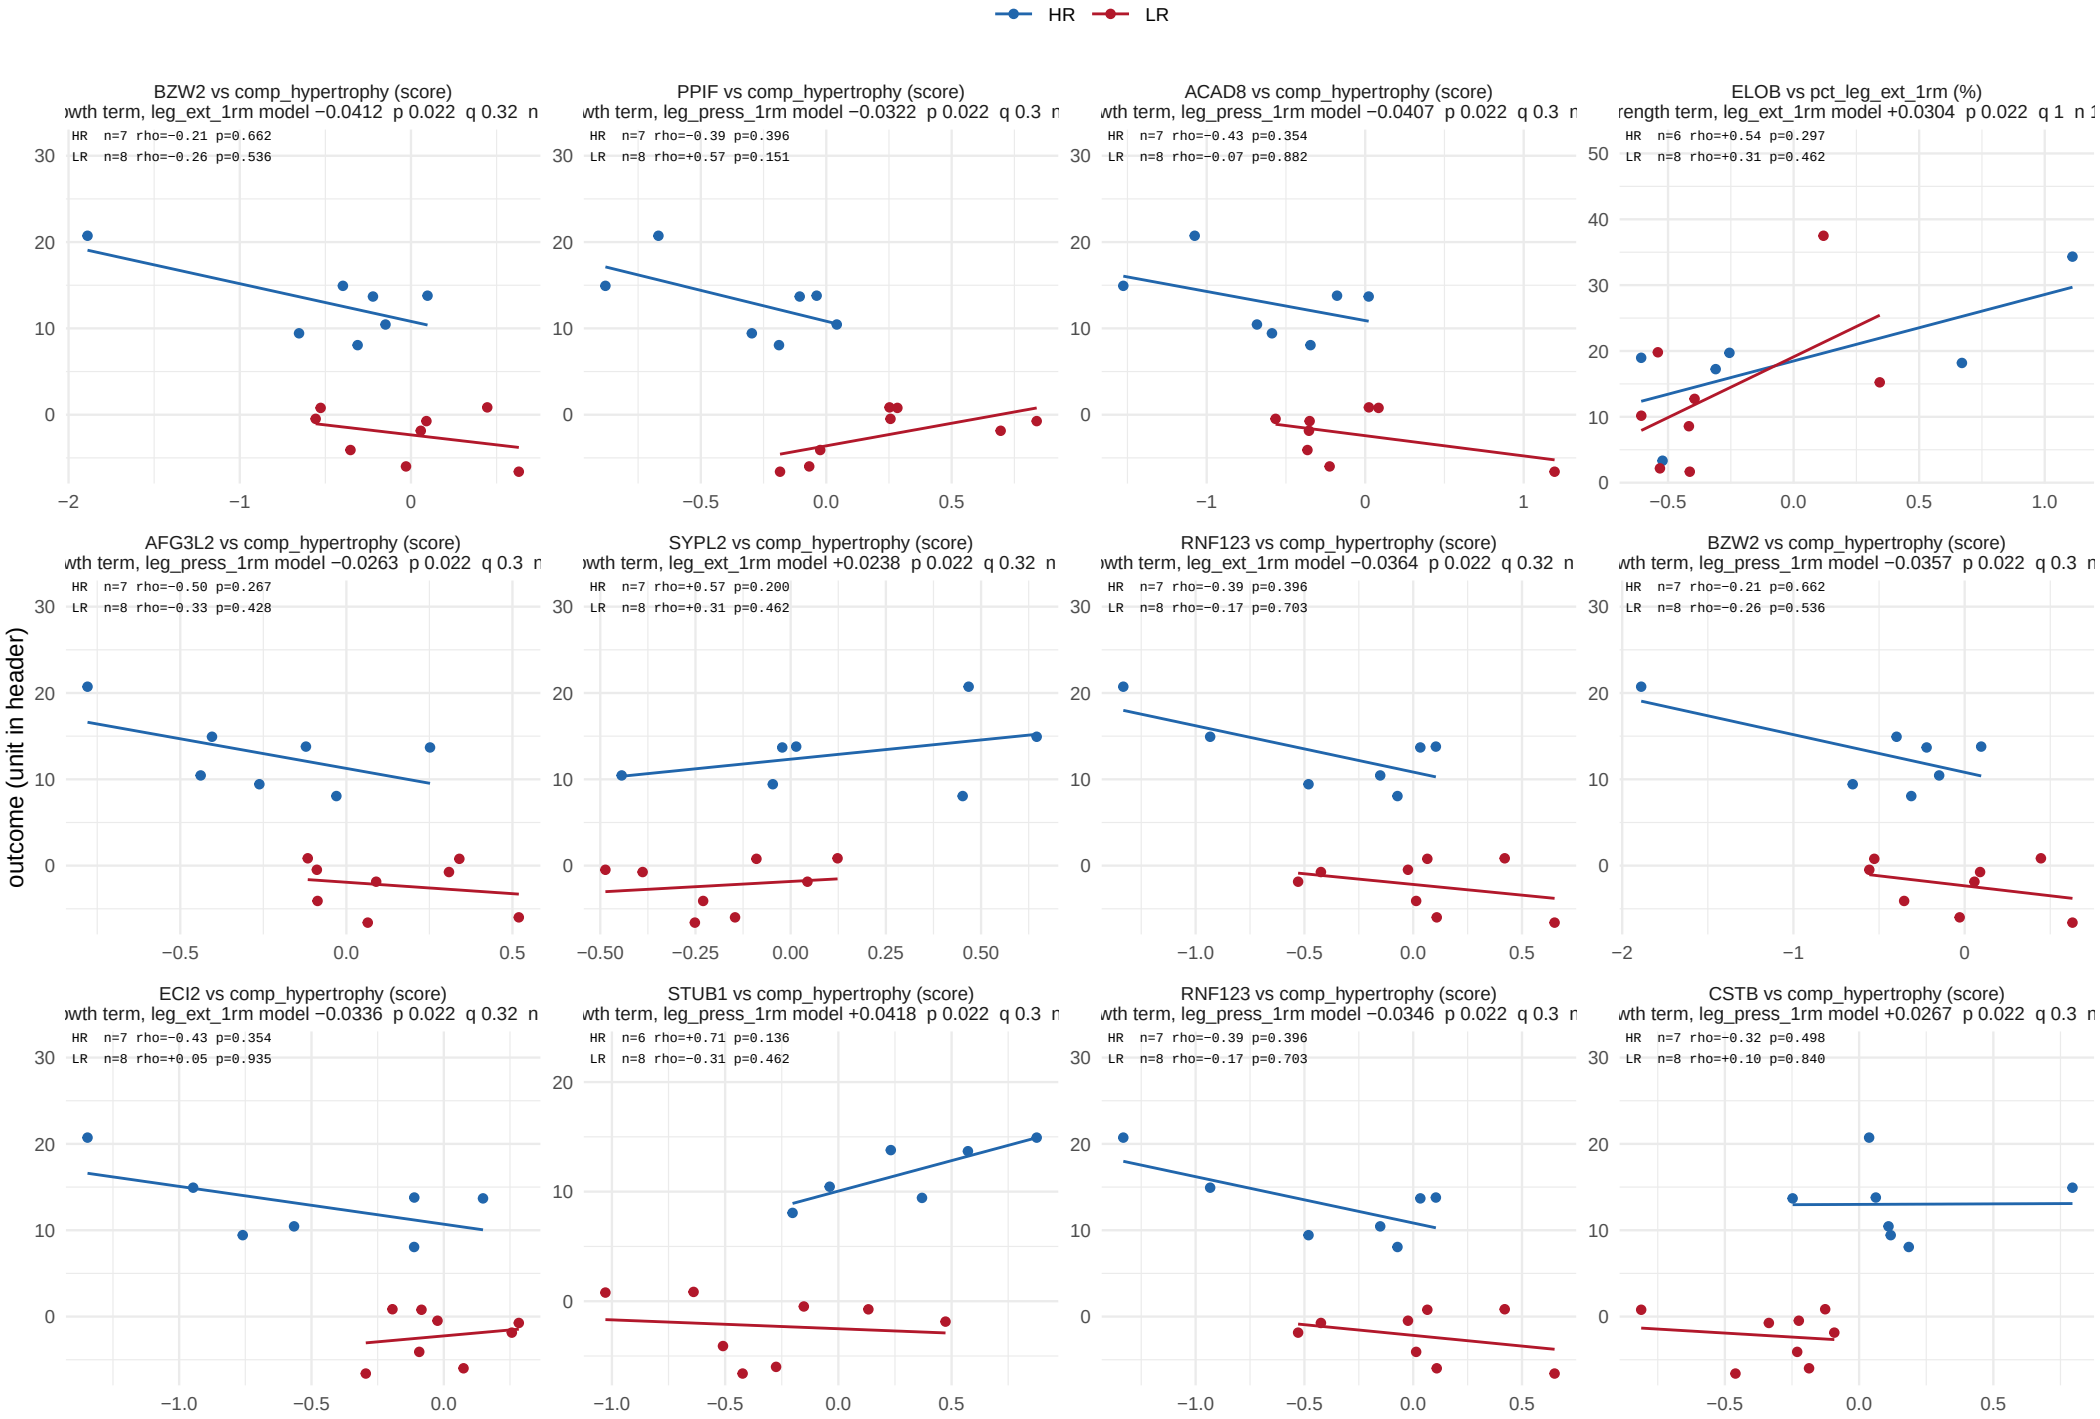

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, acute window


465 of 5806 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 20 of 39.

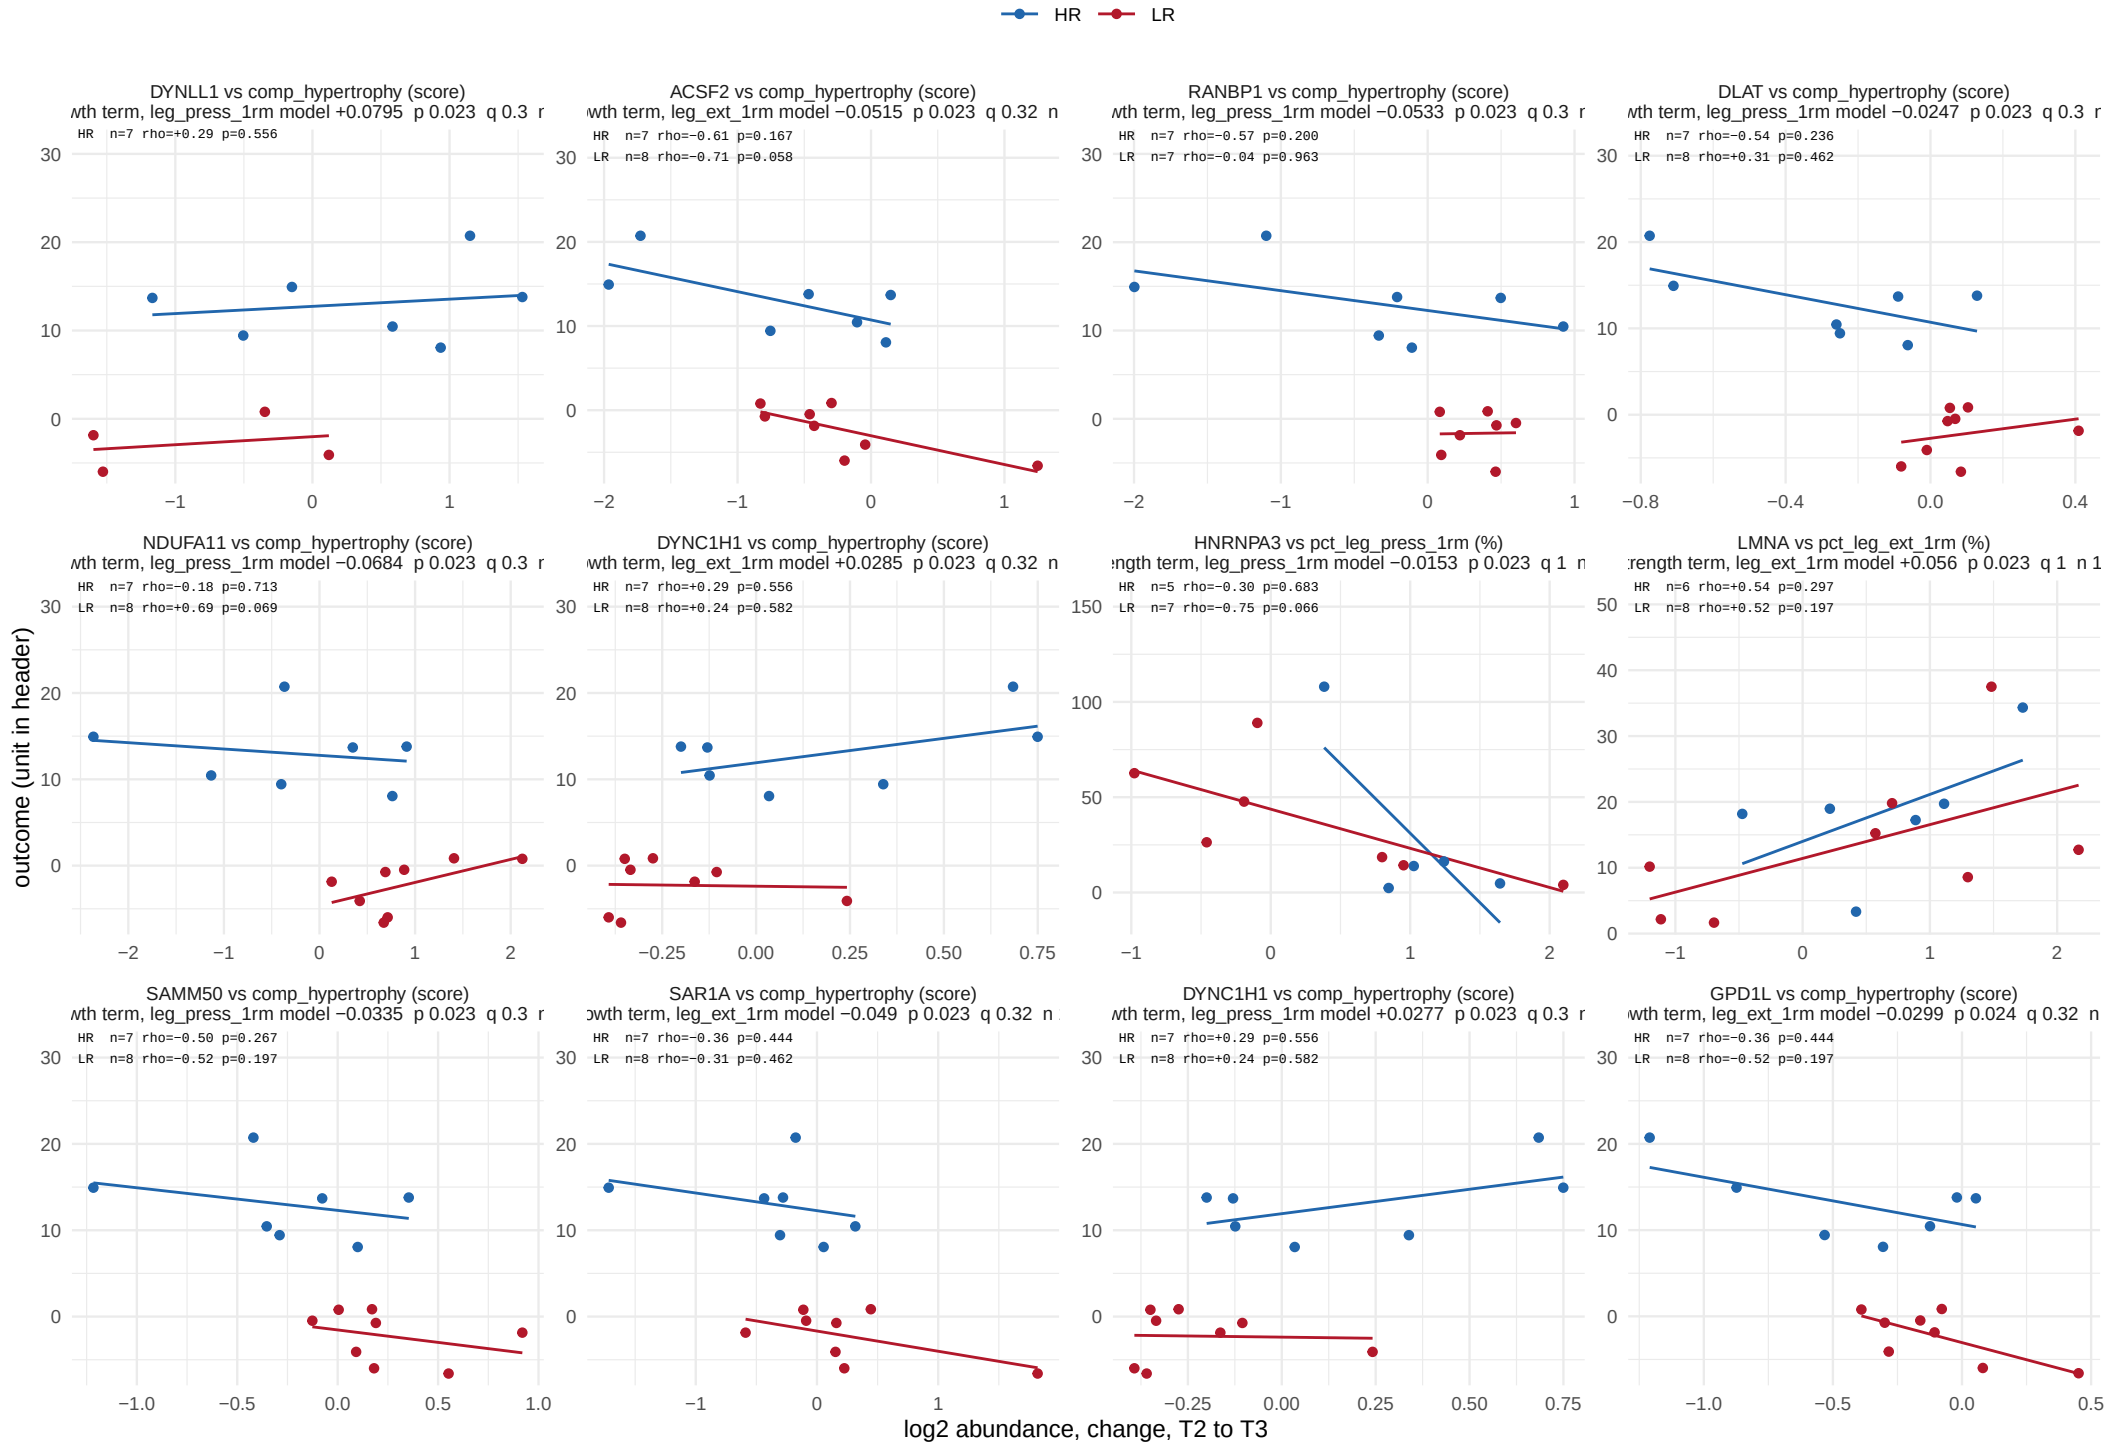

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.


Two predictor, acute window

465 of 5806 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 21 of 39.

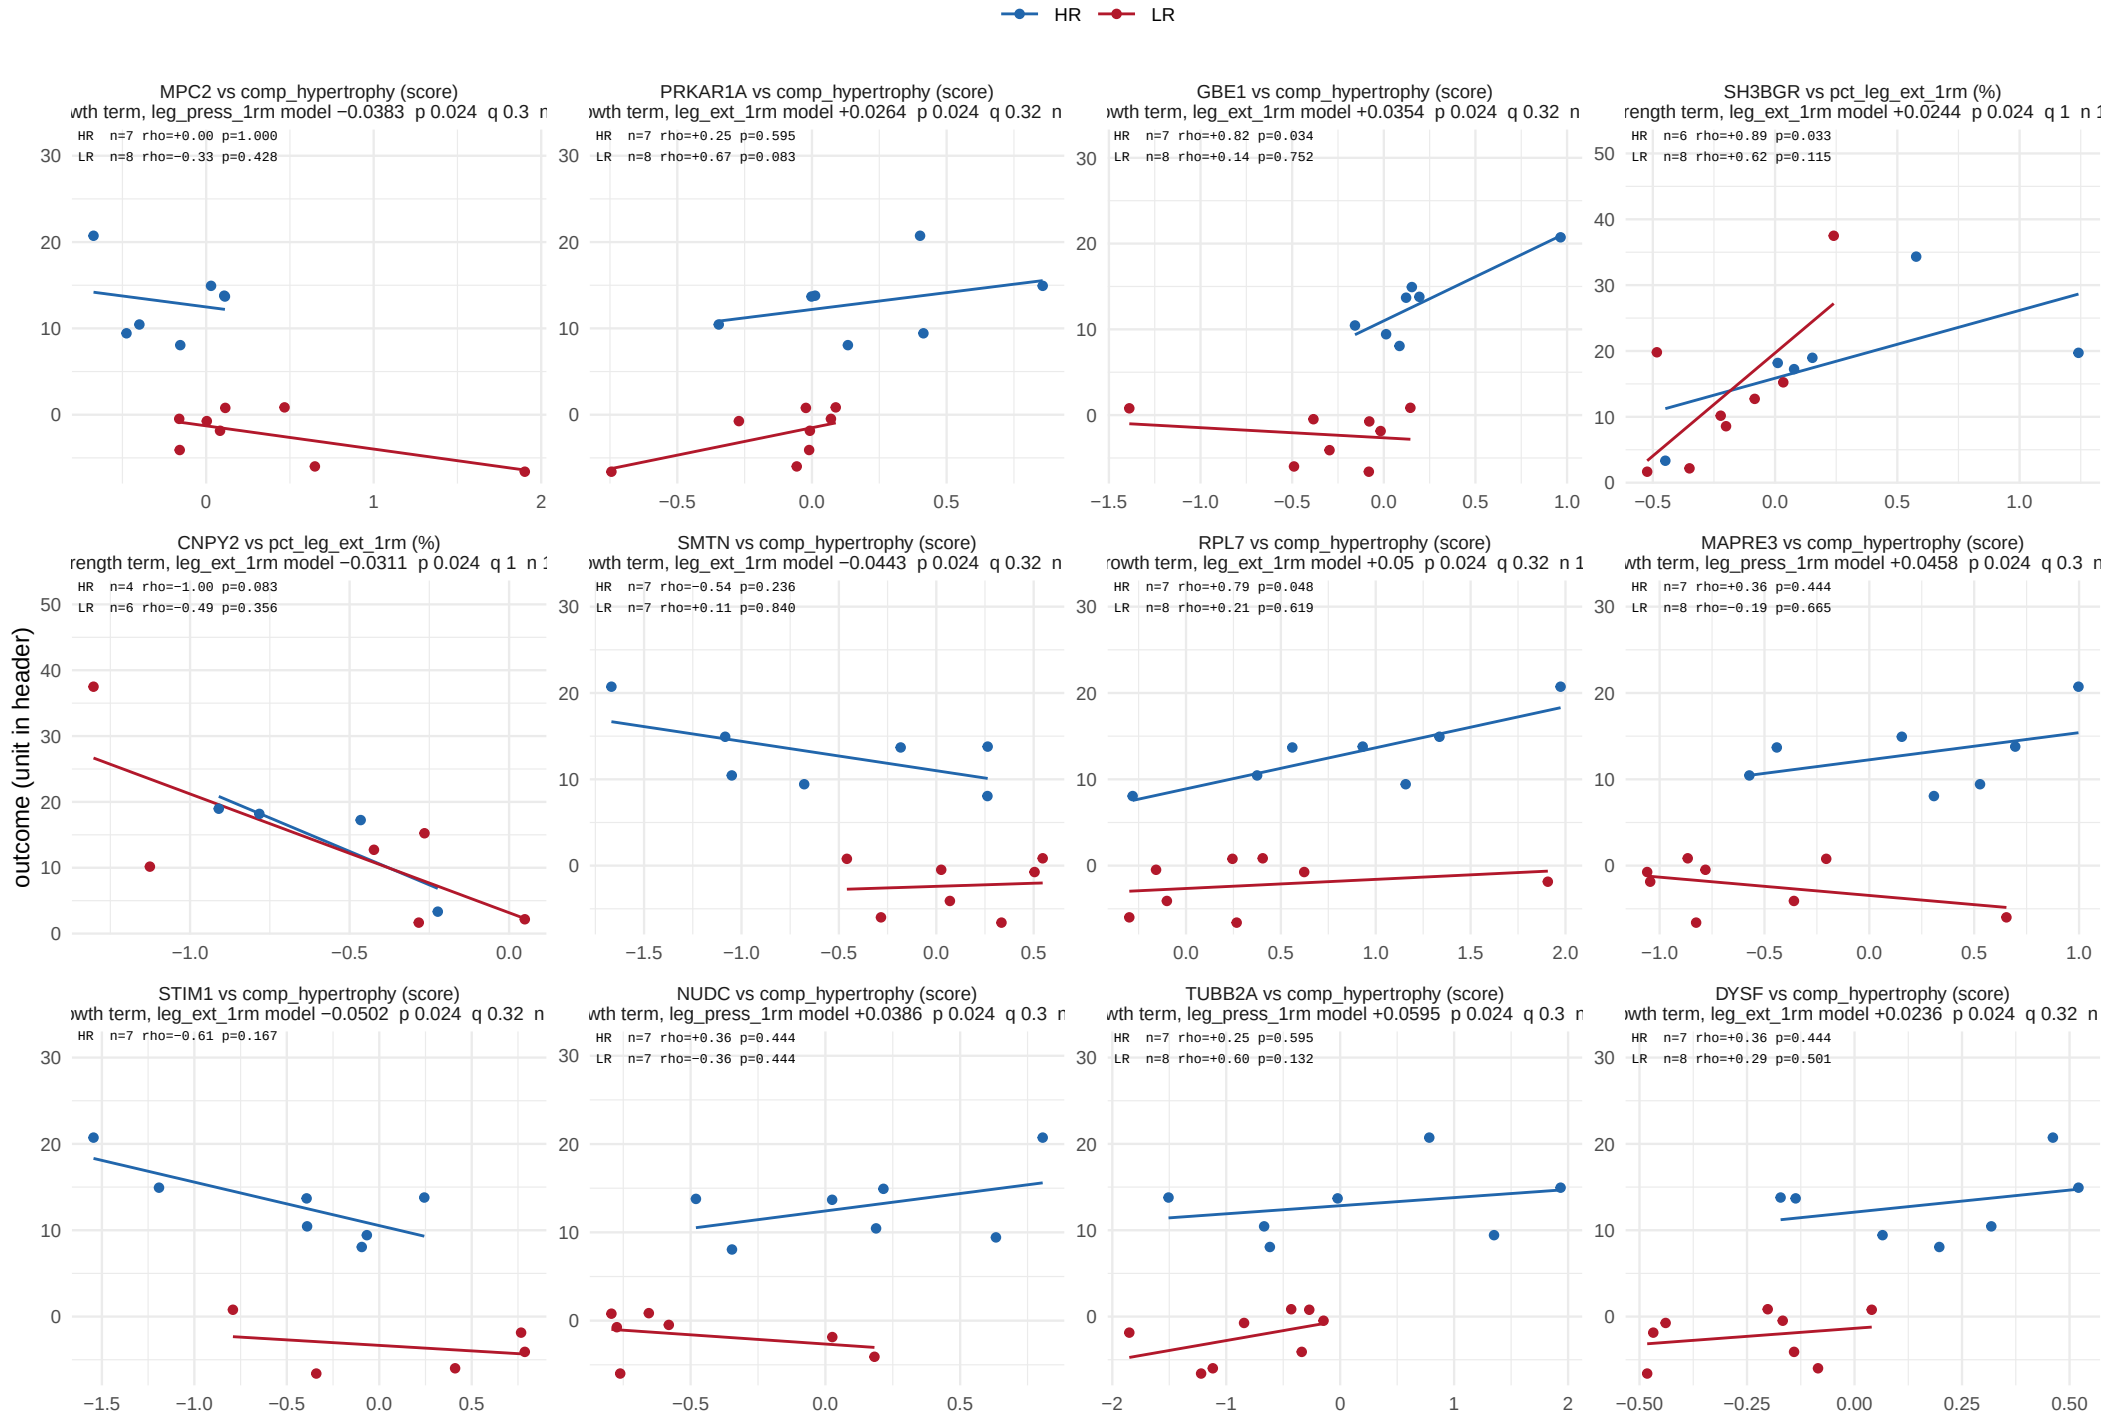


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, acute window

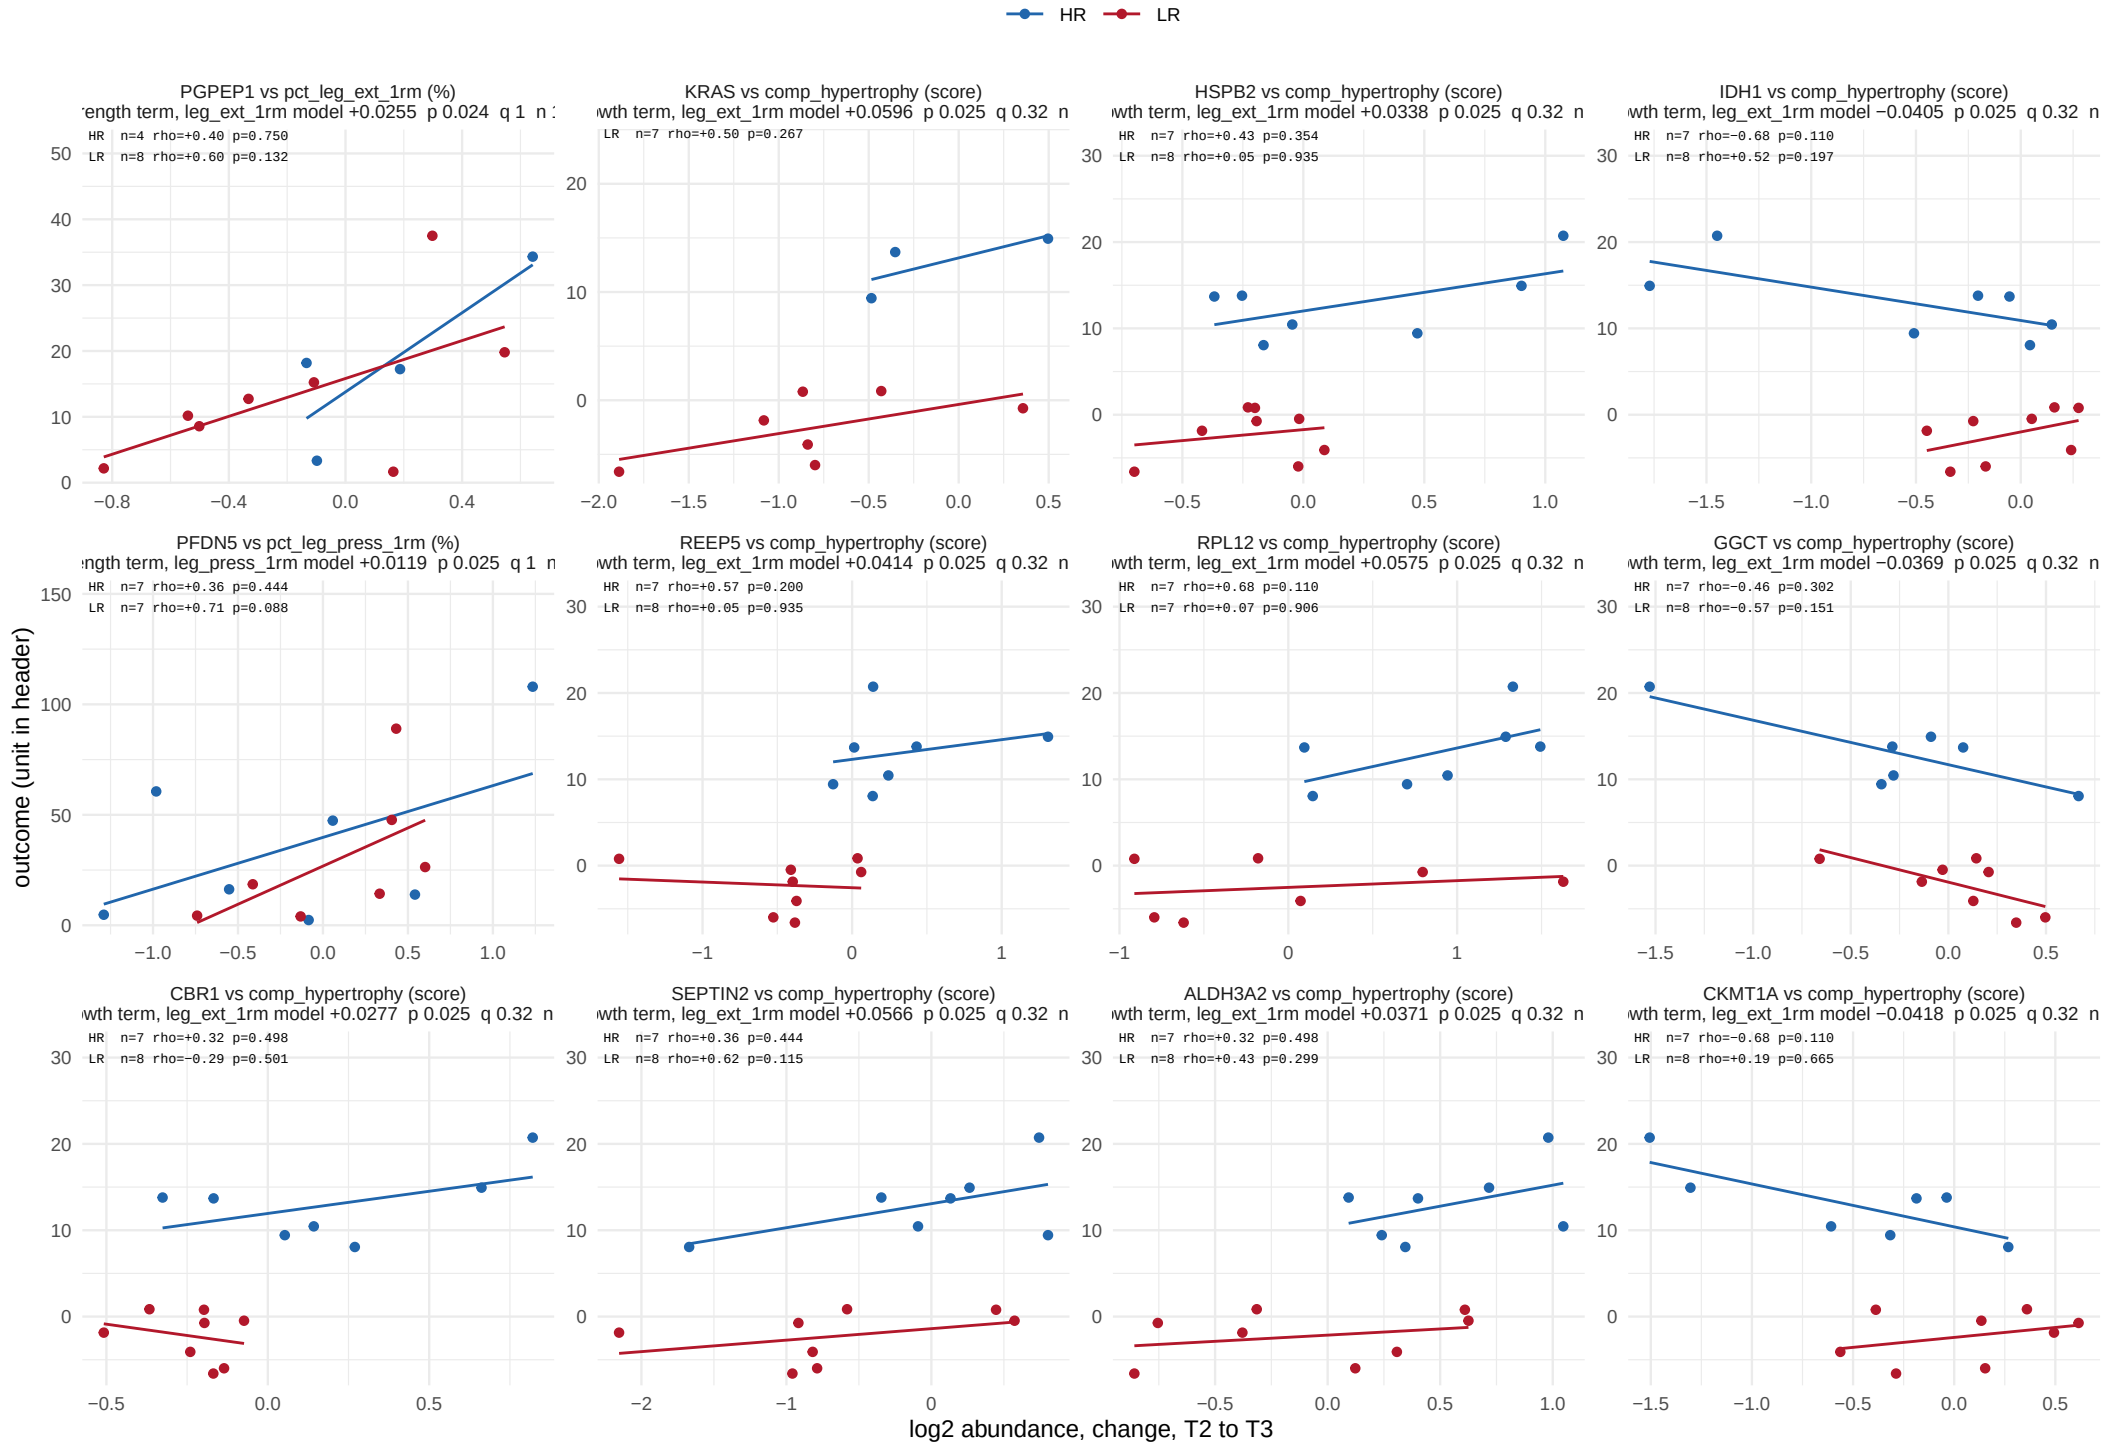


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, acute window

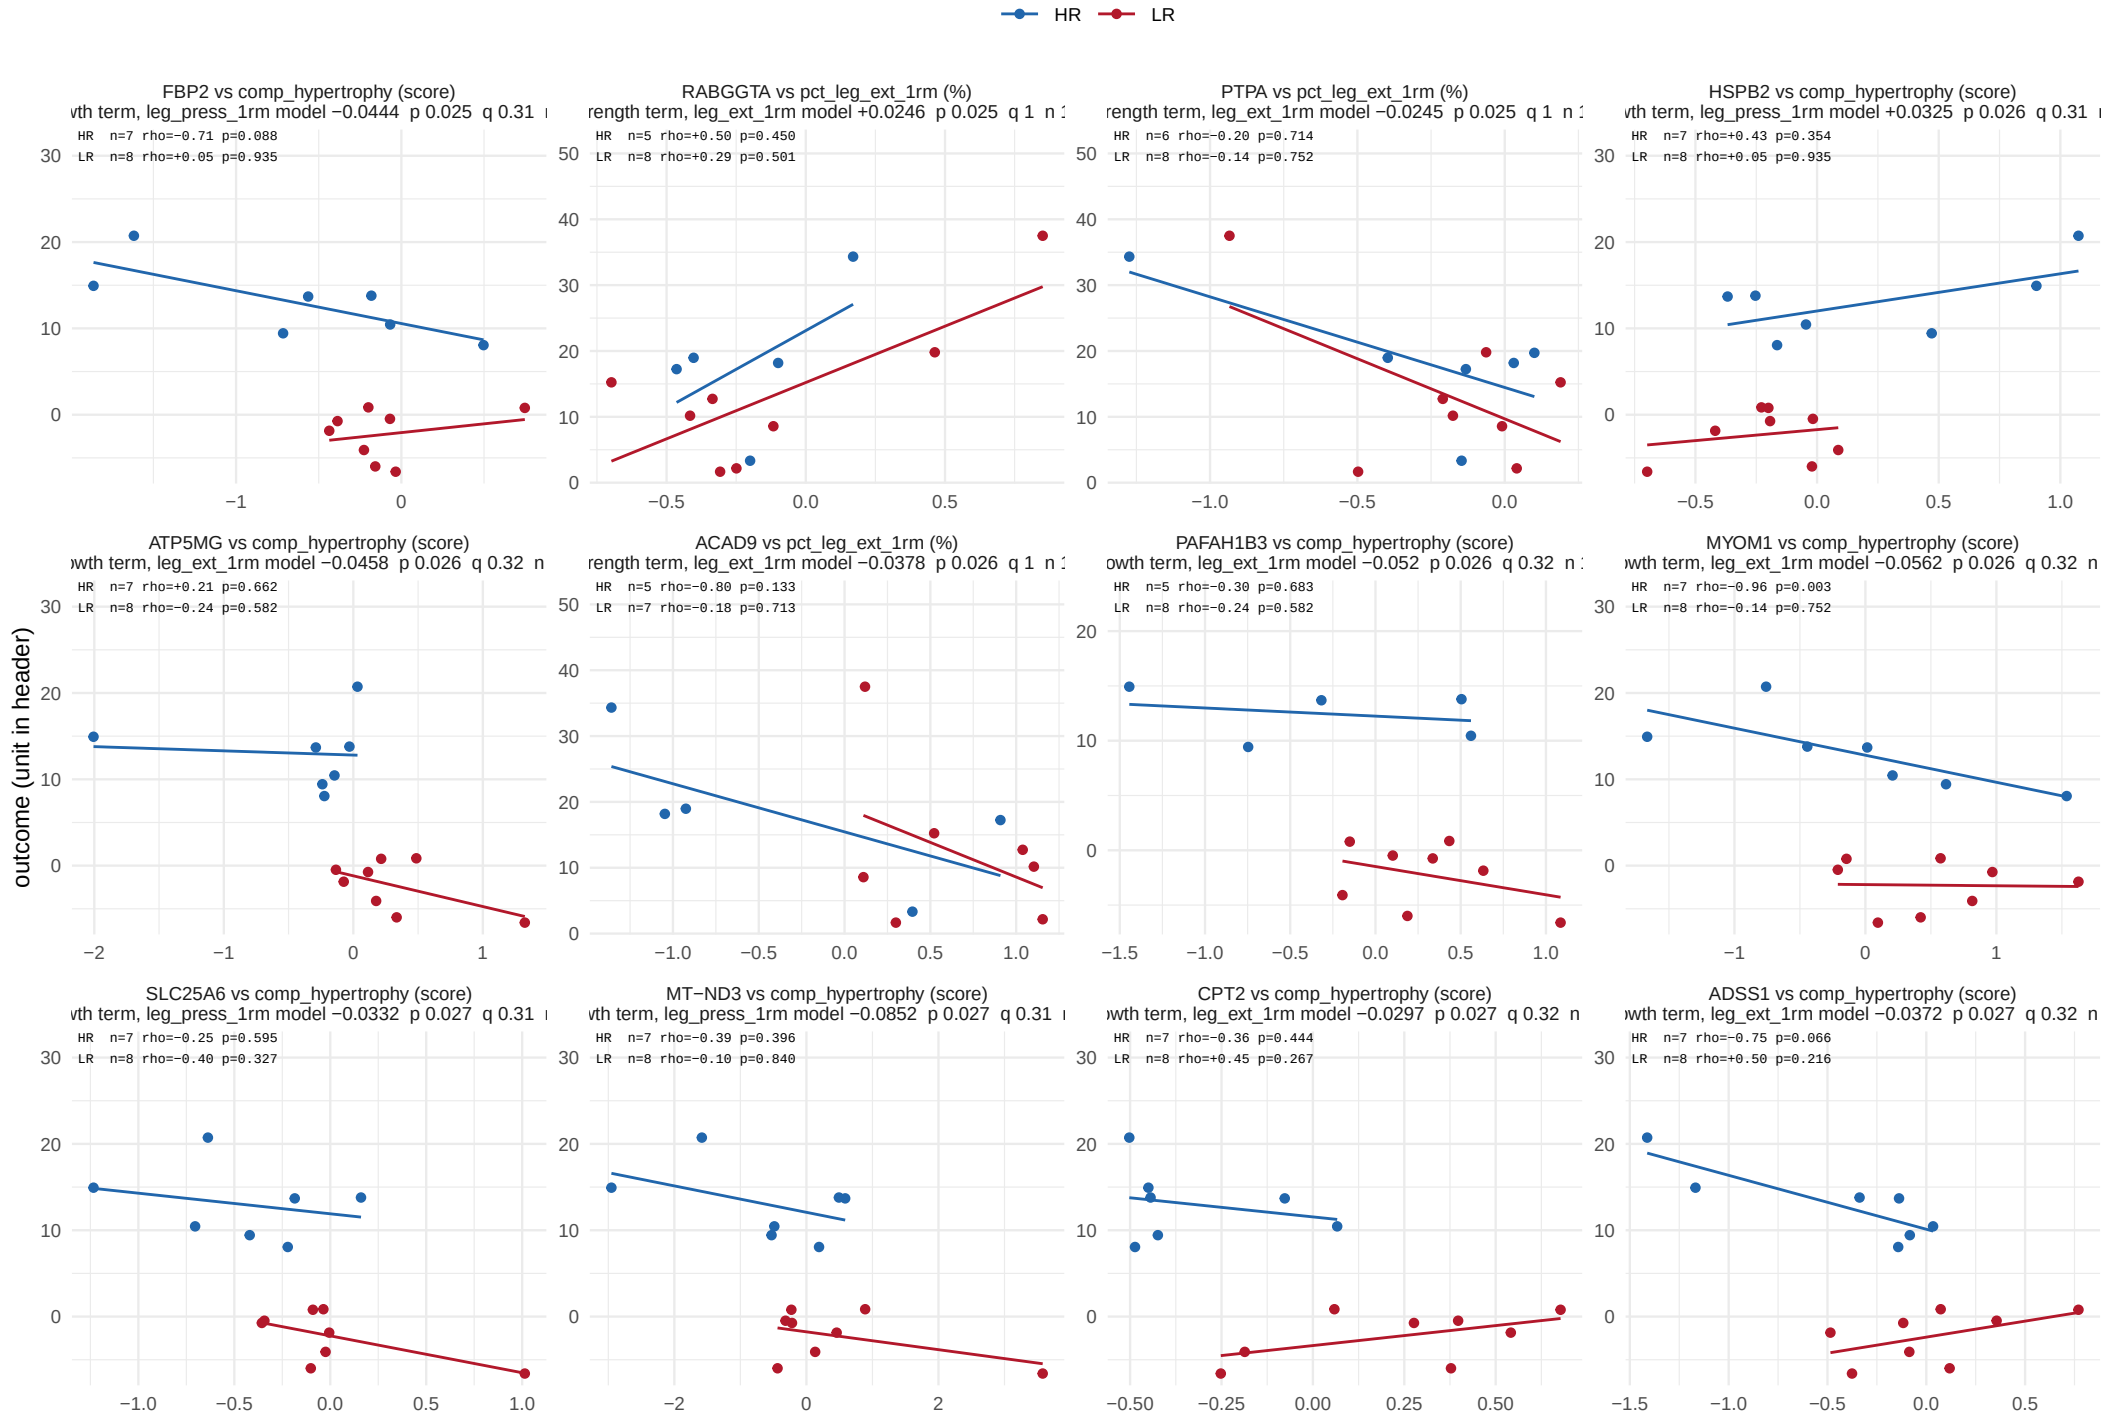

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.


Two predictor, acute window

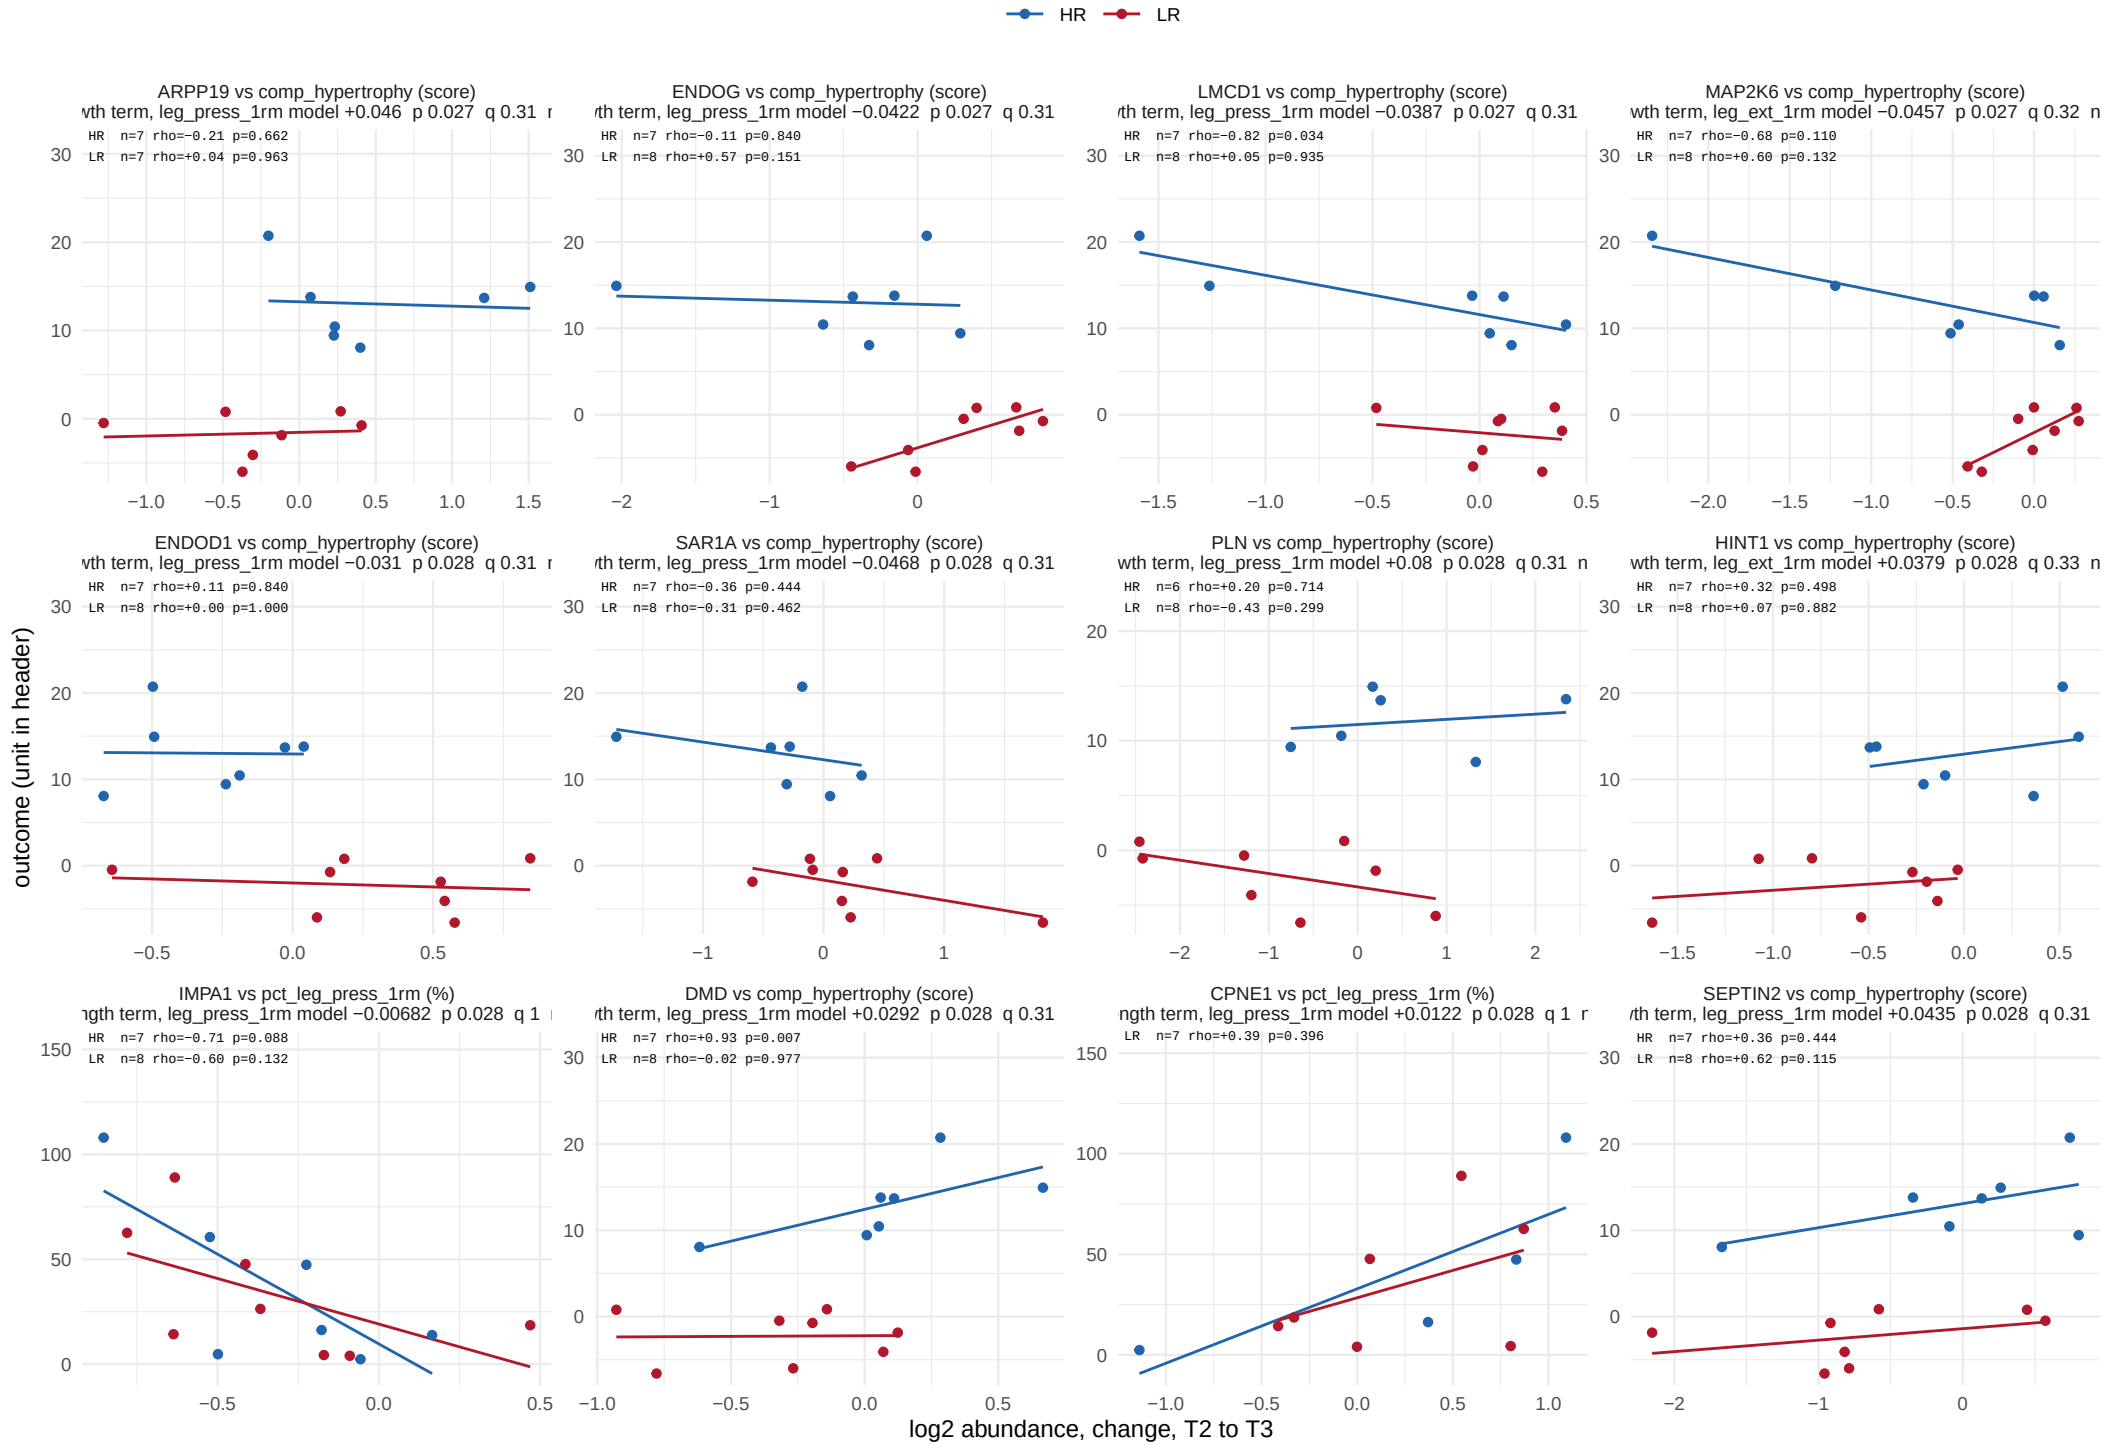

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, acute window


465 of 5806 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 25 of 39.

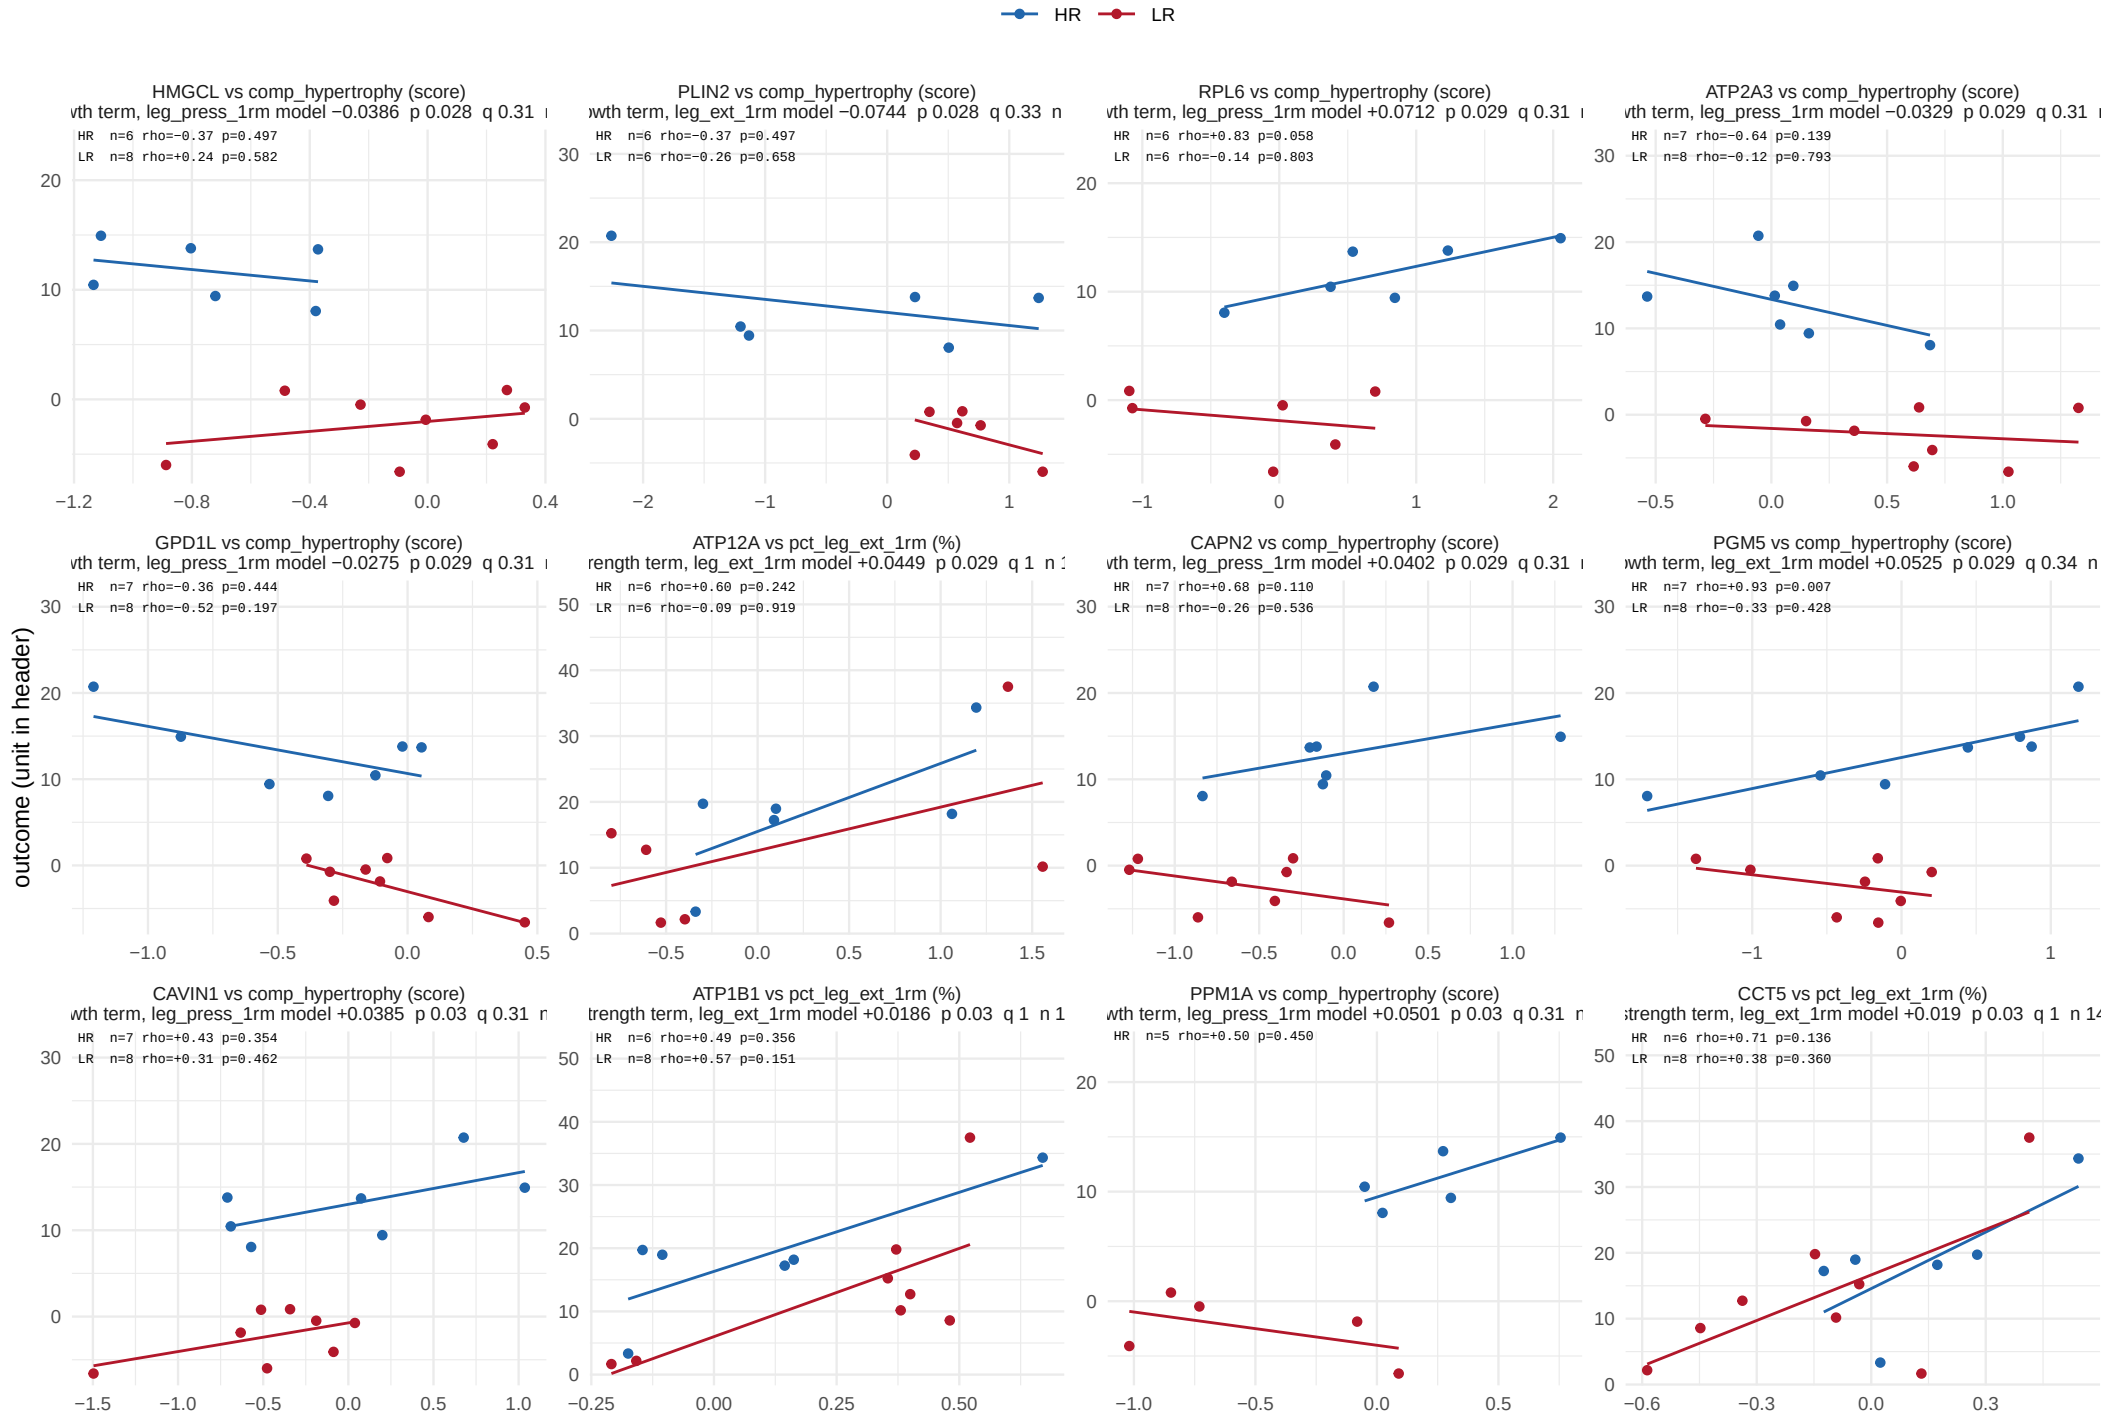

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, acute window


465 of 5806 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 26 of 39.

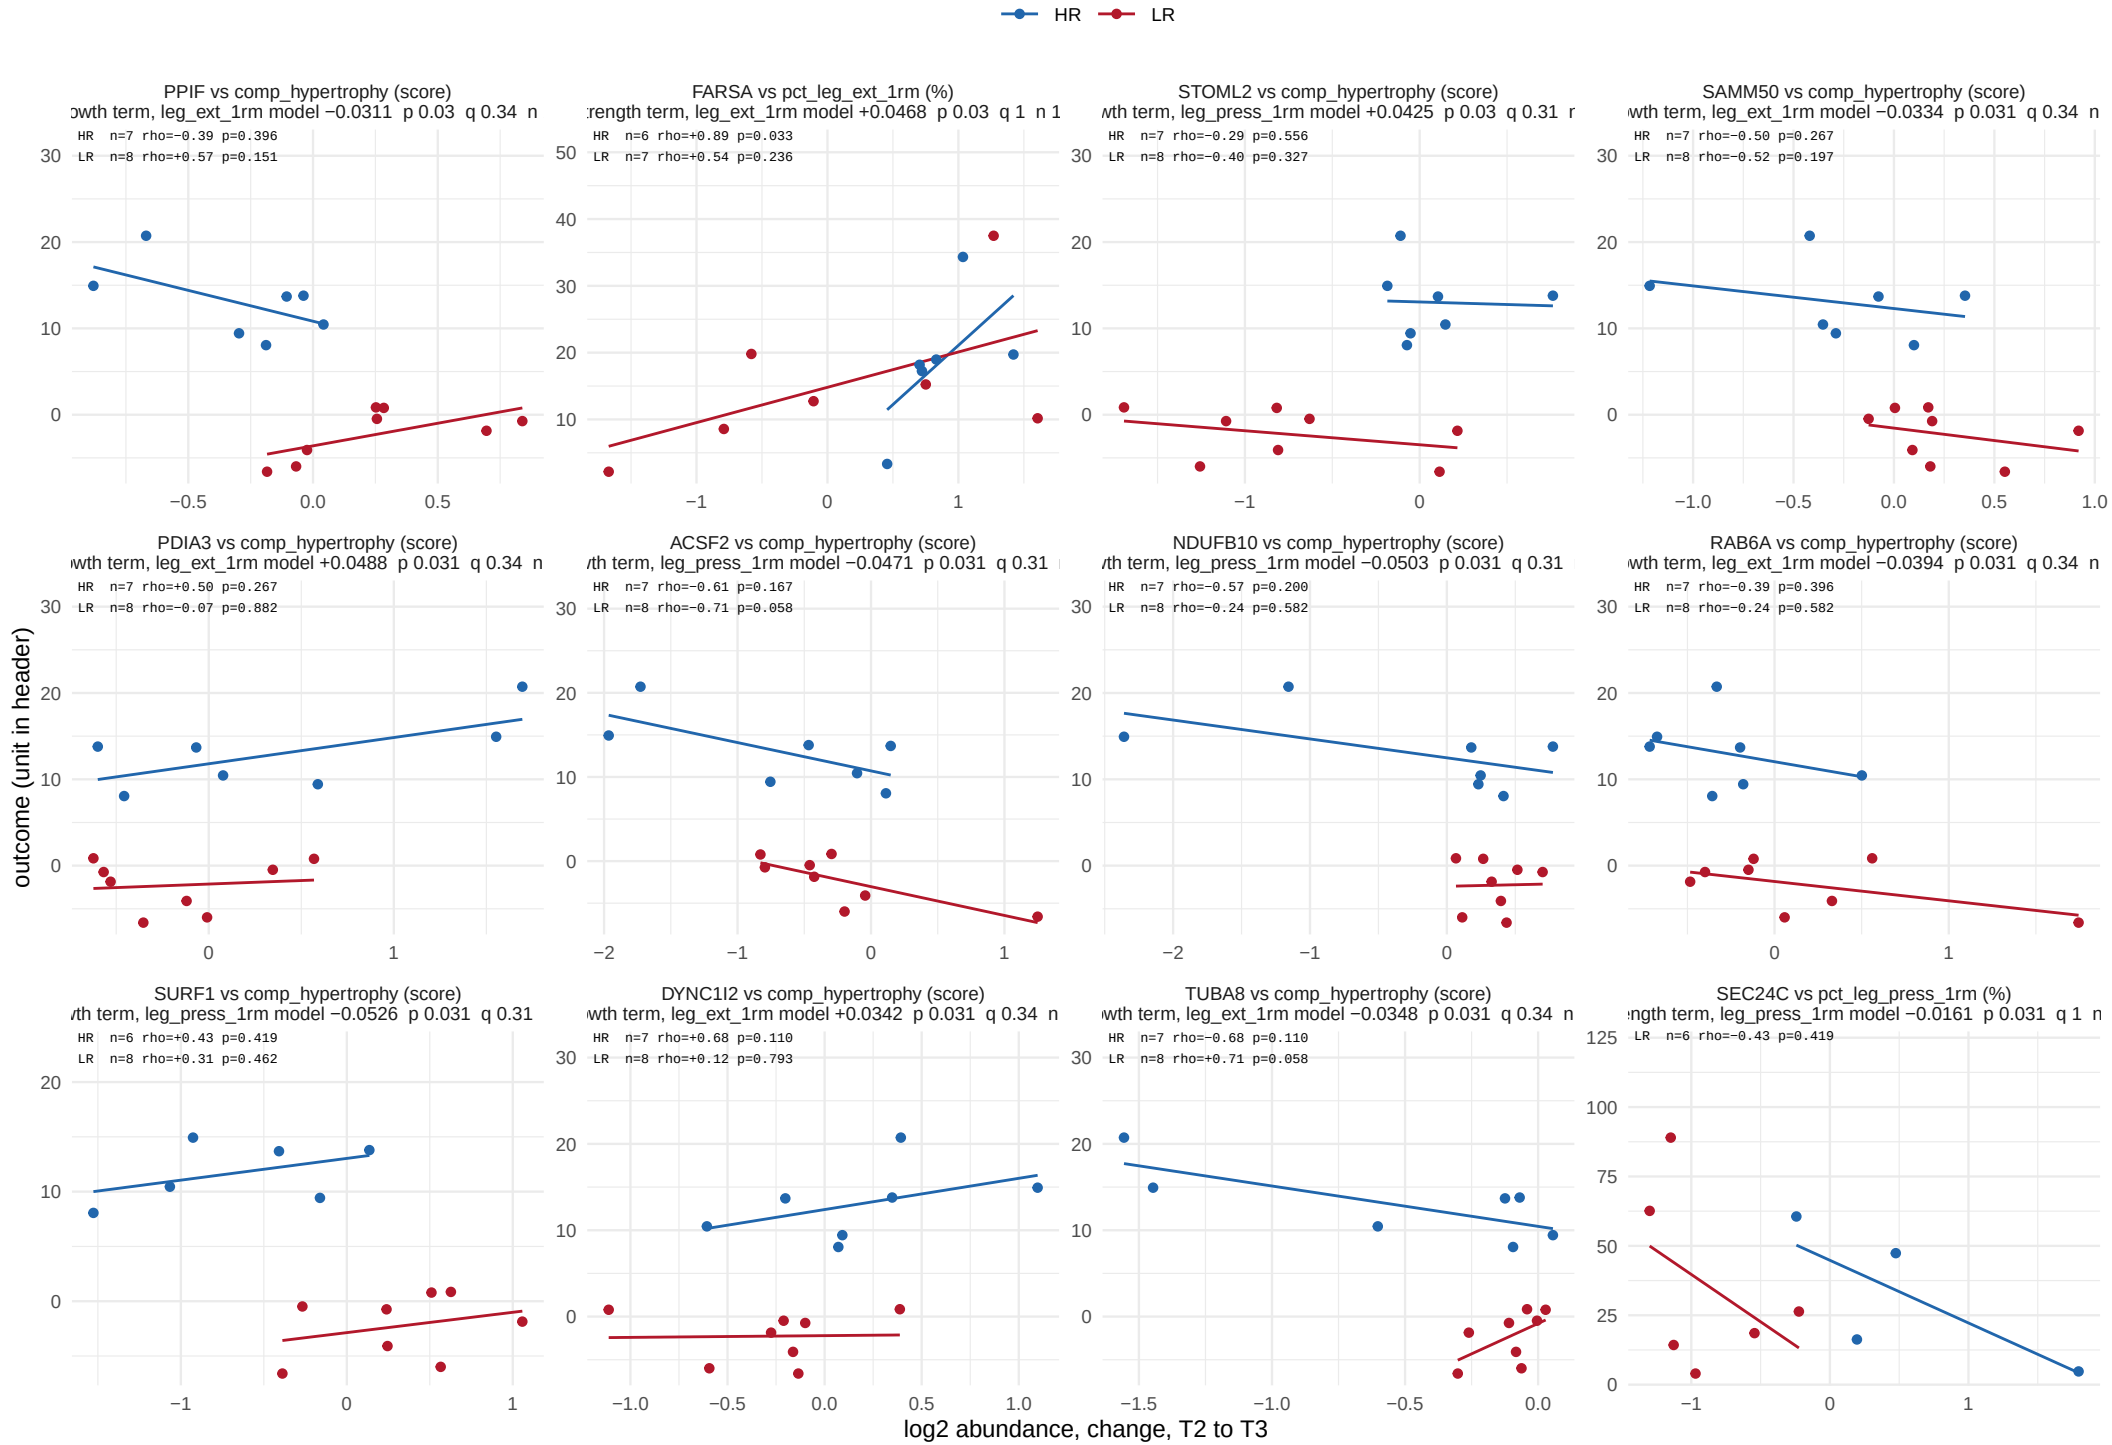

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.


Two predictor, acute window

465 of 5806 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 27 of 39.

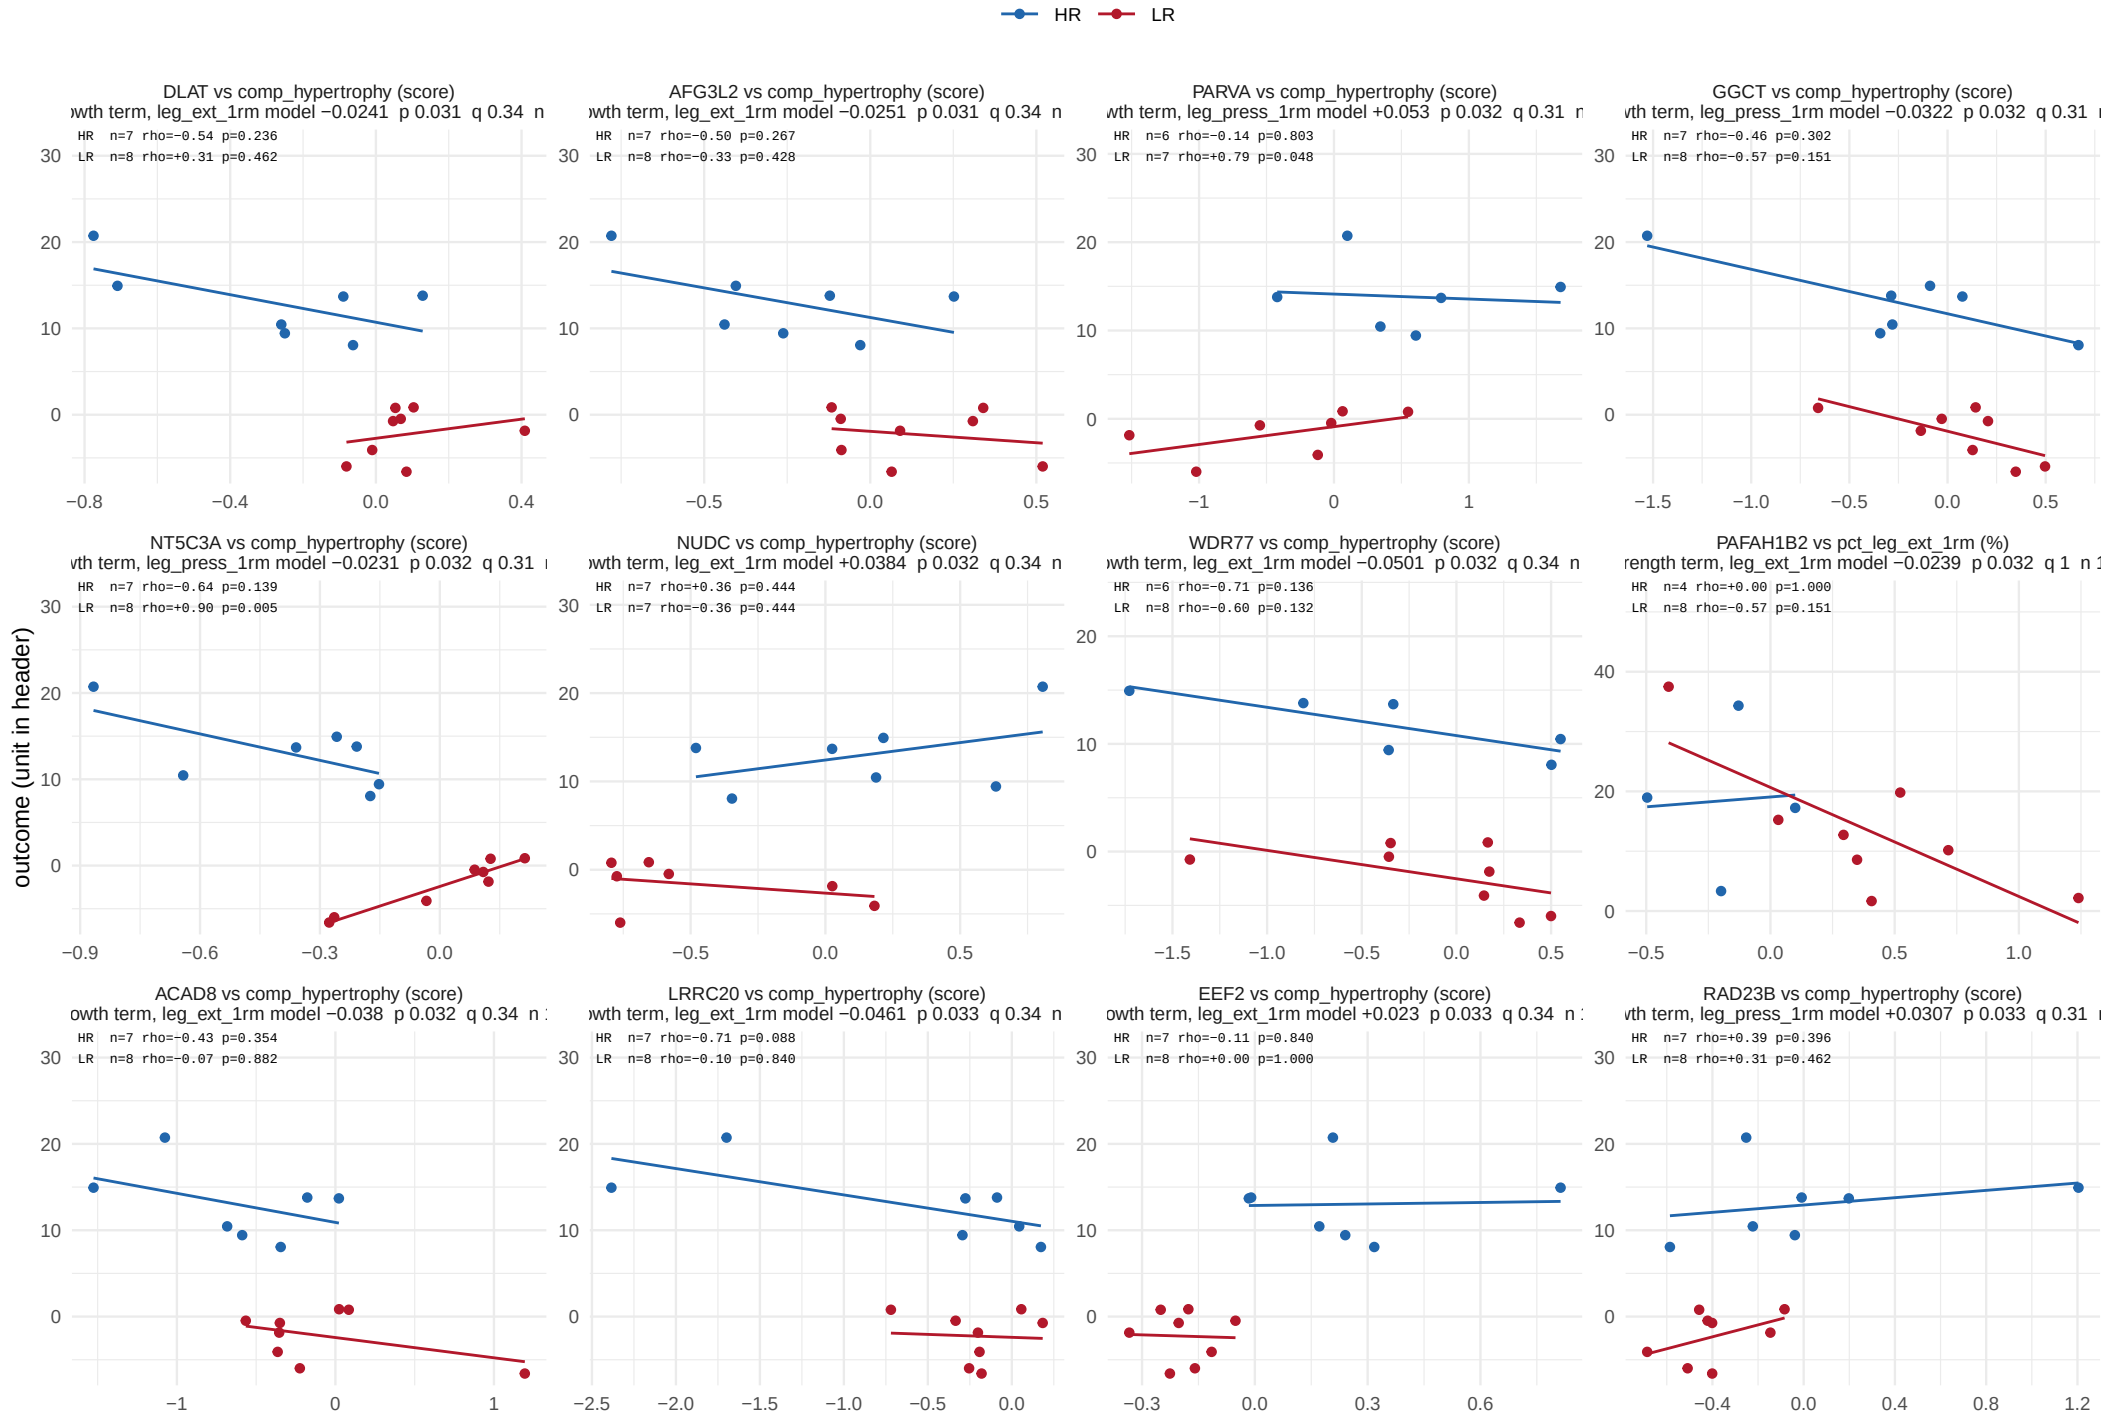


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, acute window

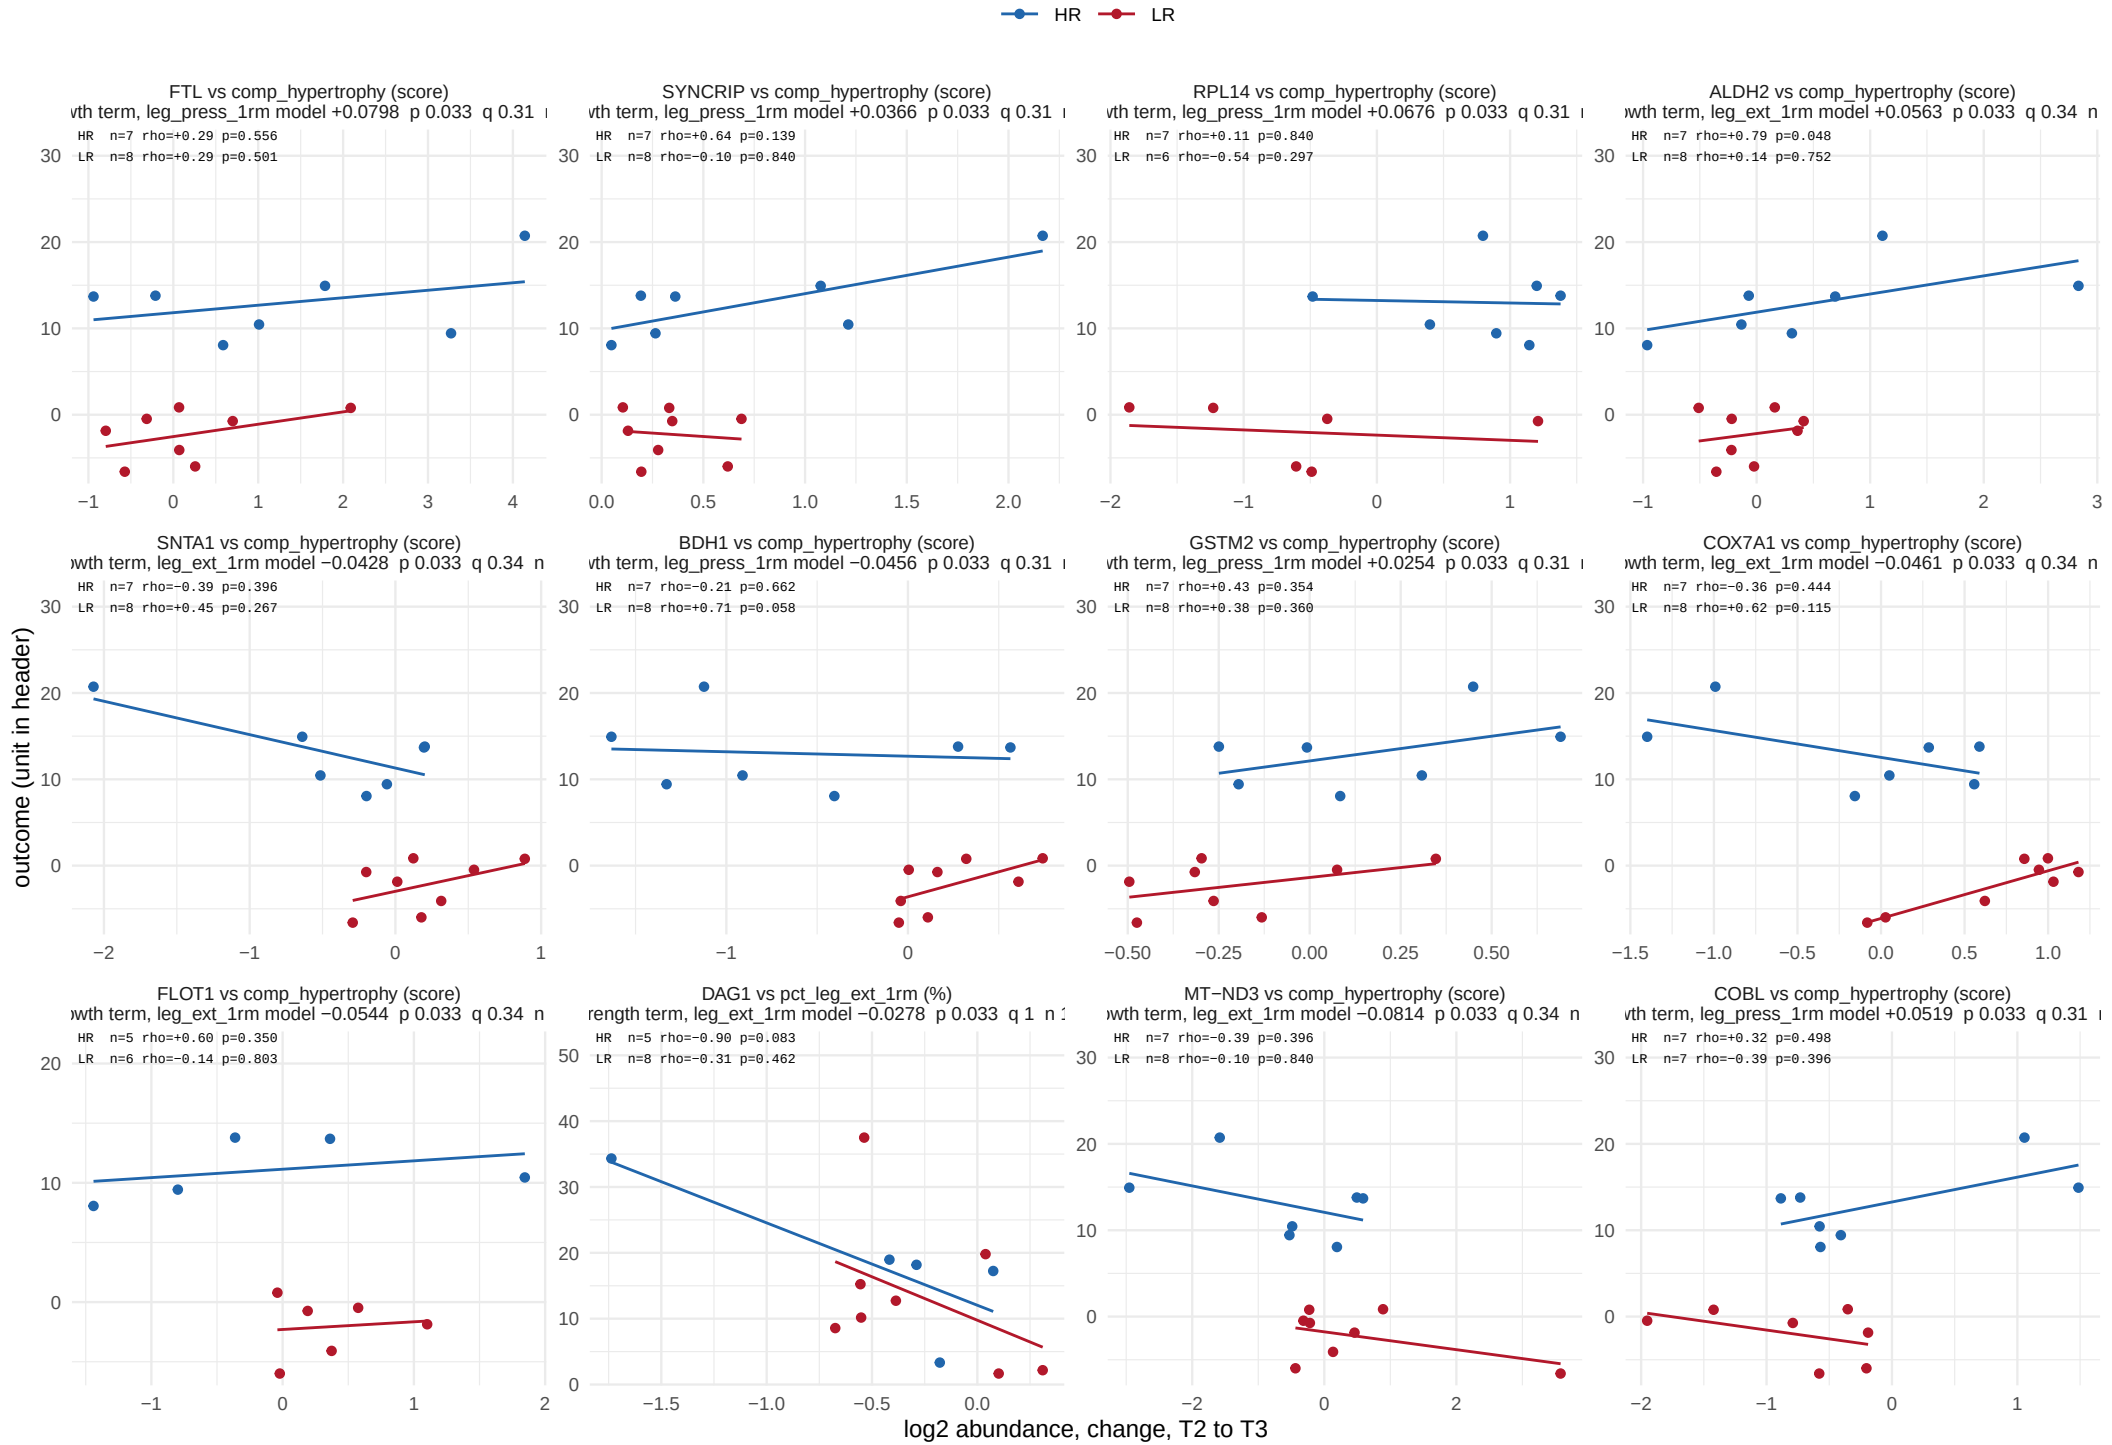

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.


Two predictor, acute window

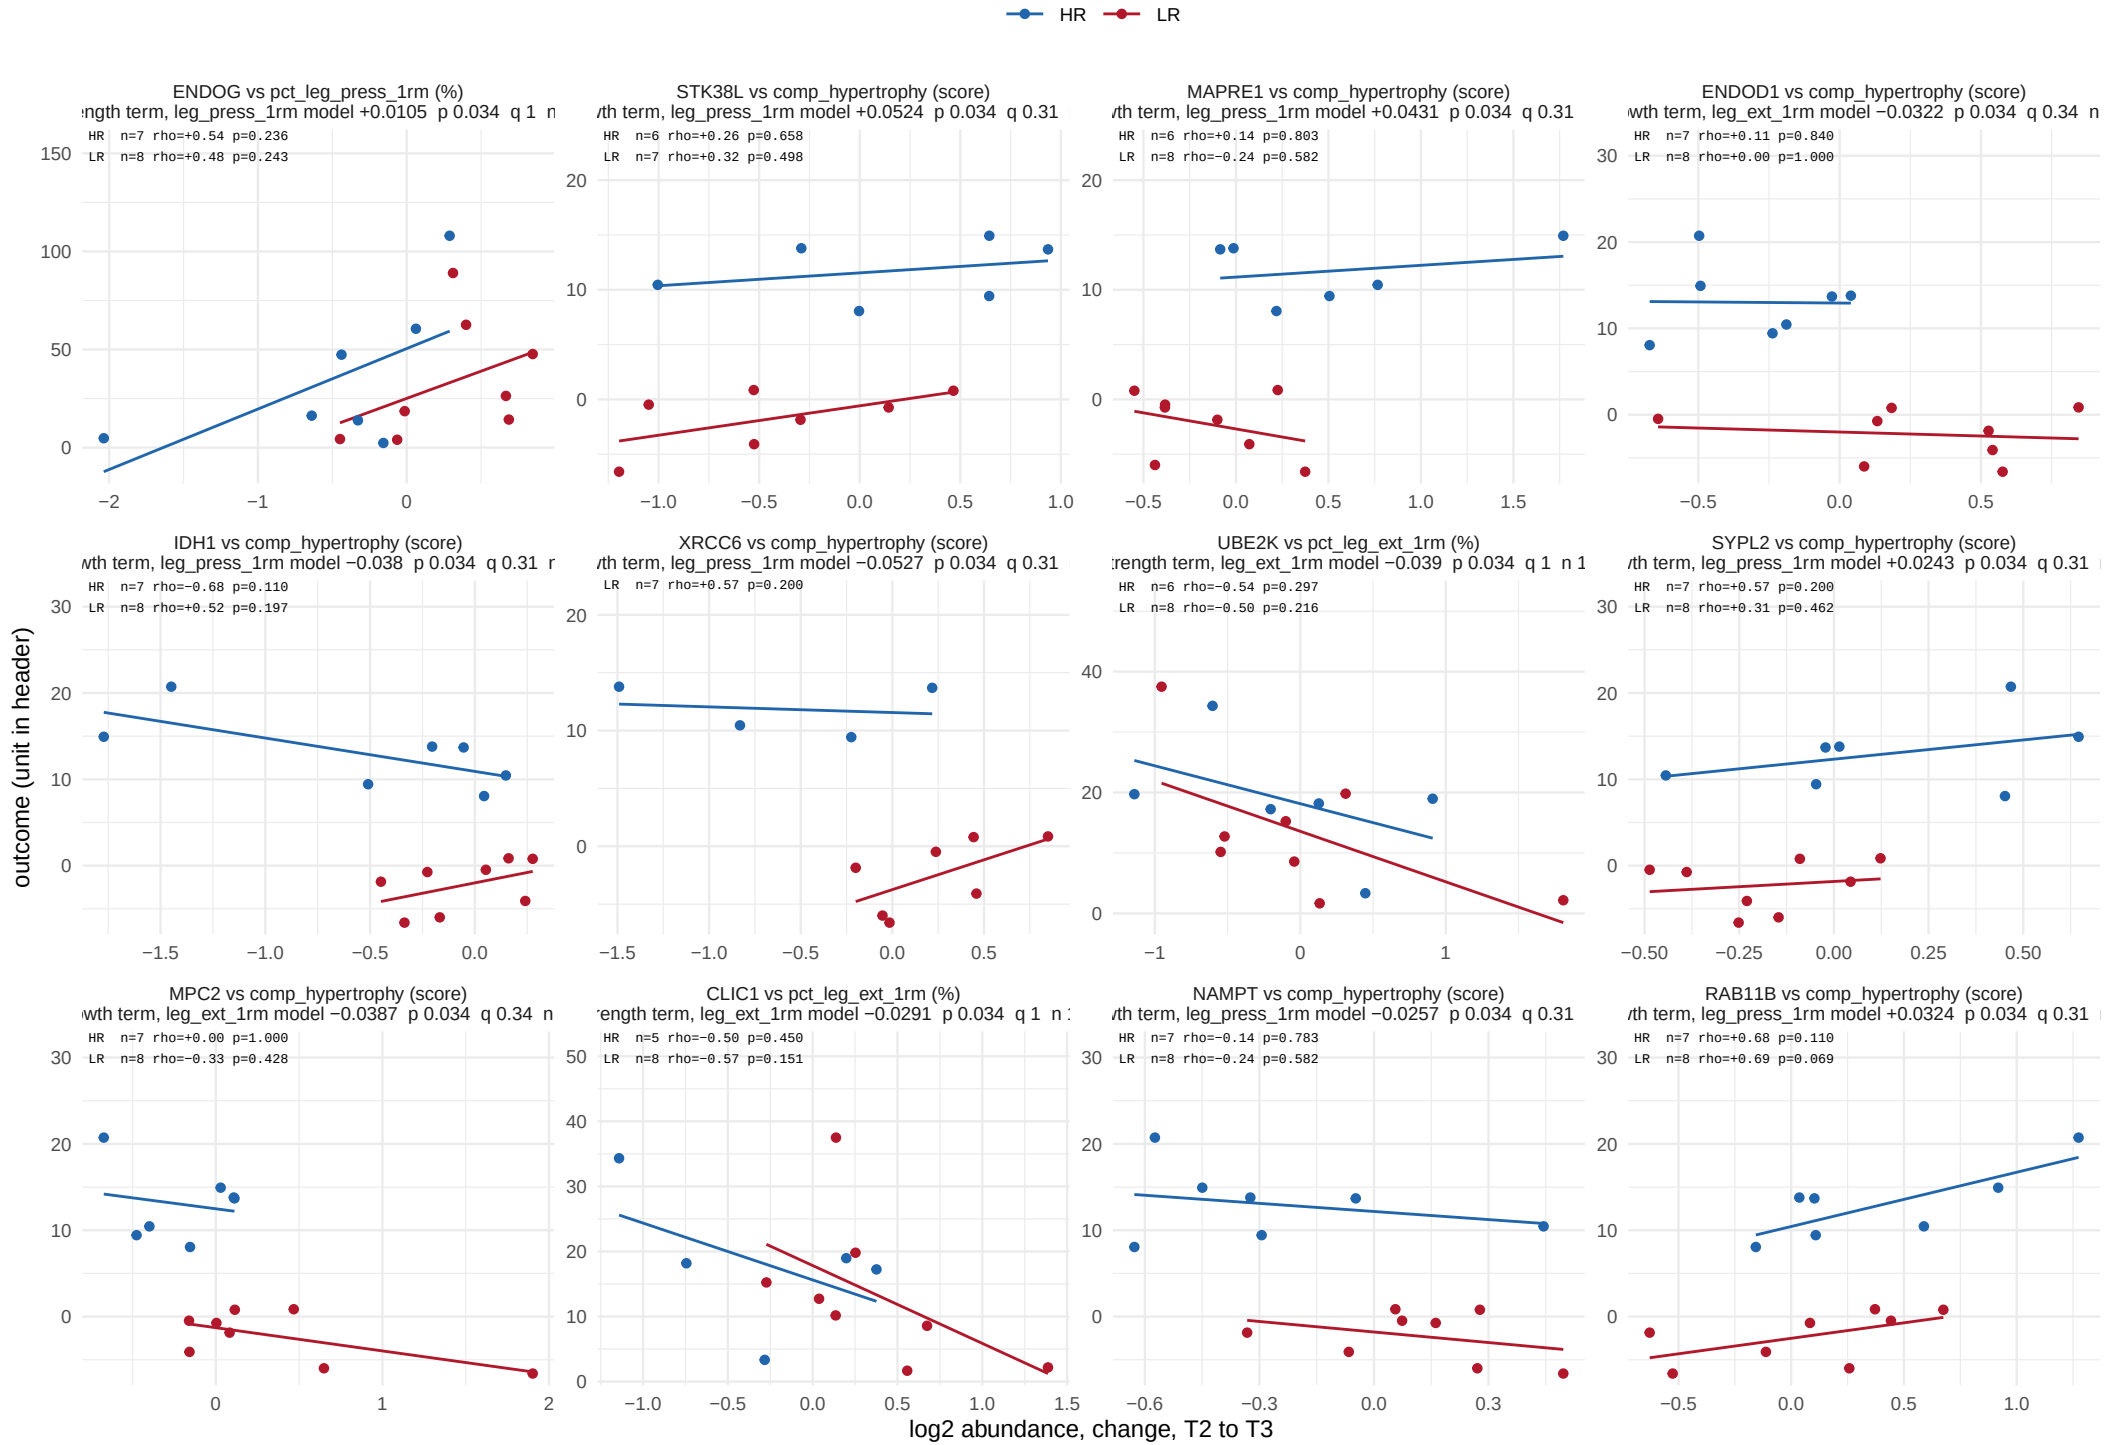

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, acute window


465 of 5806 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 30 of 39.

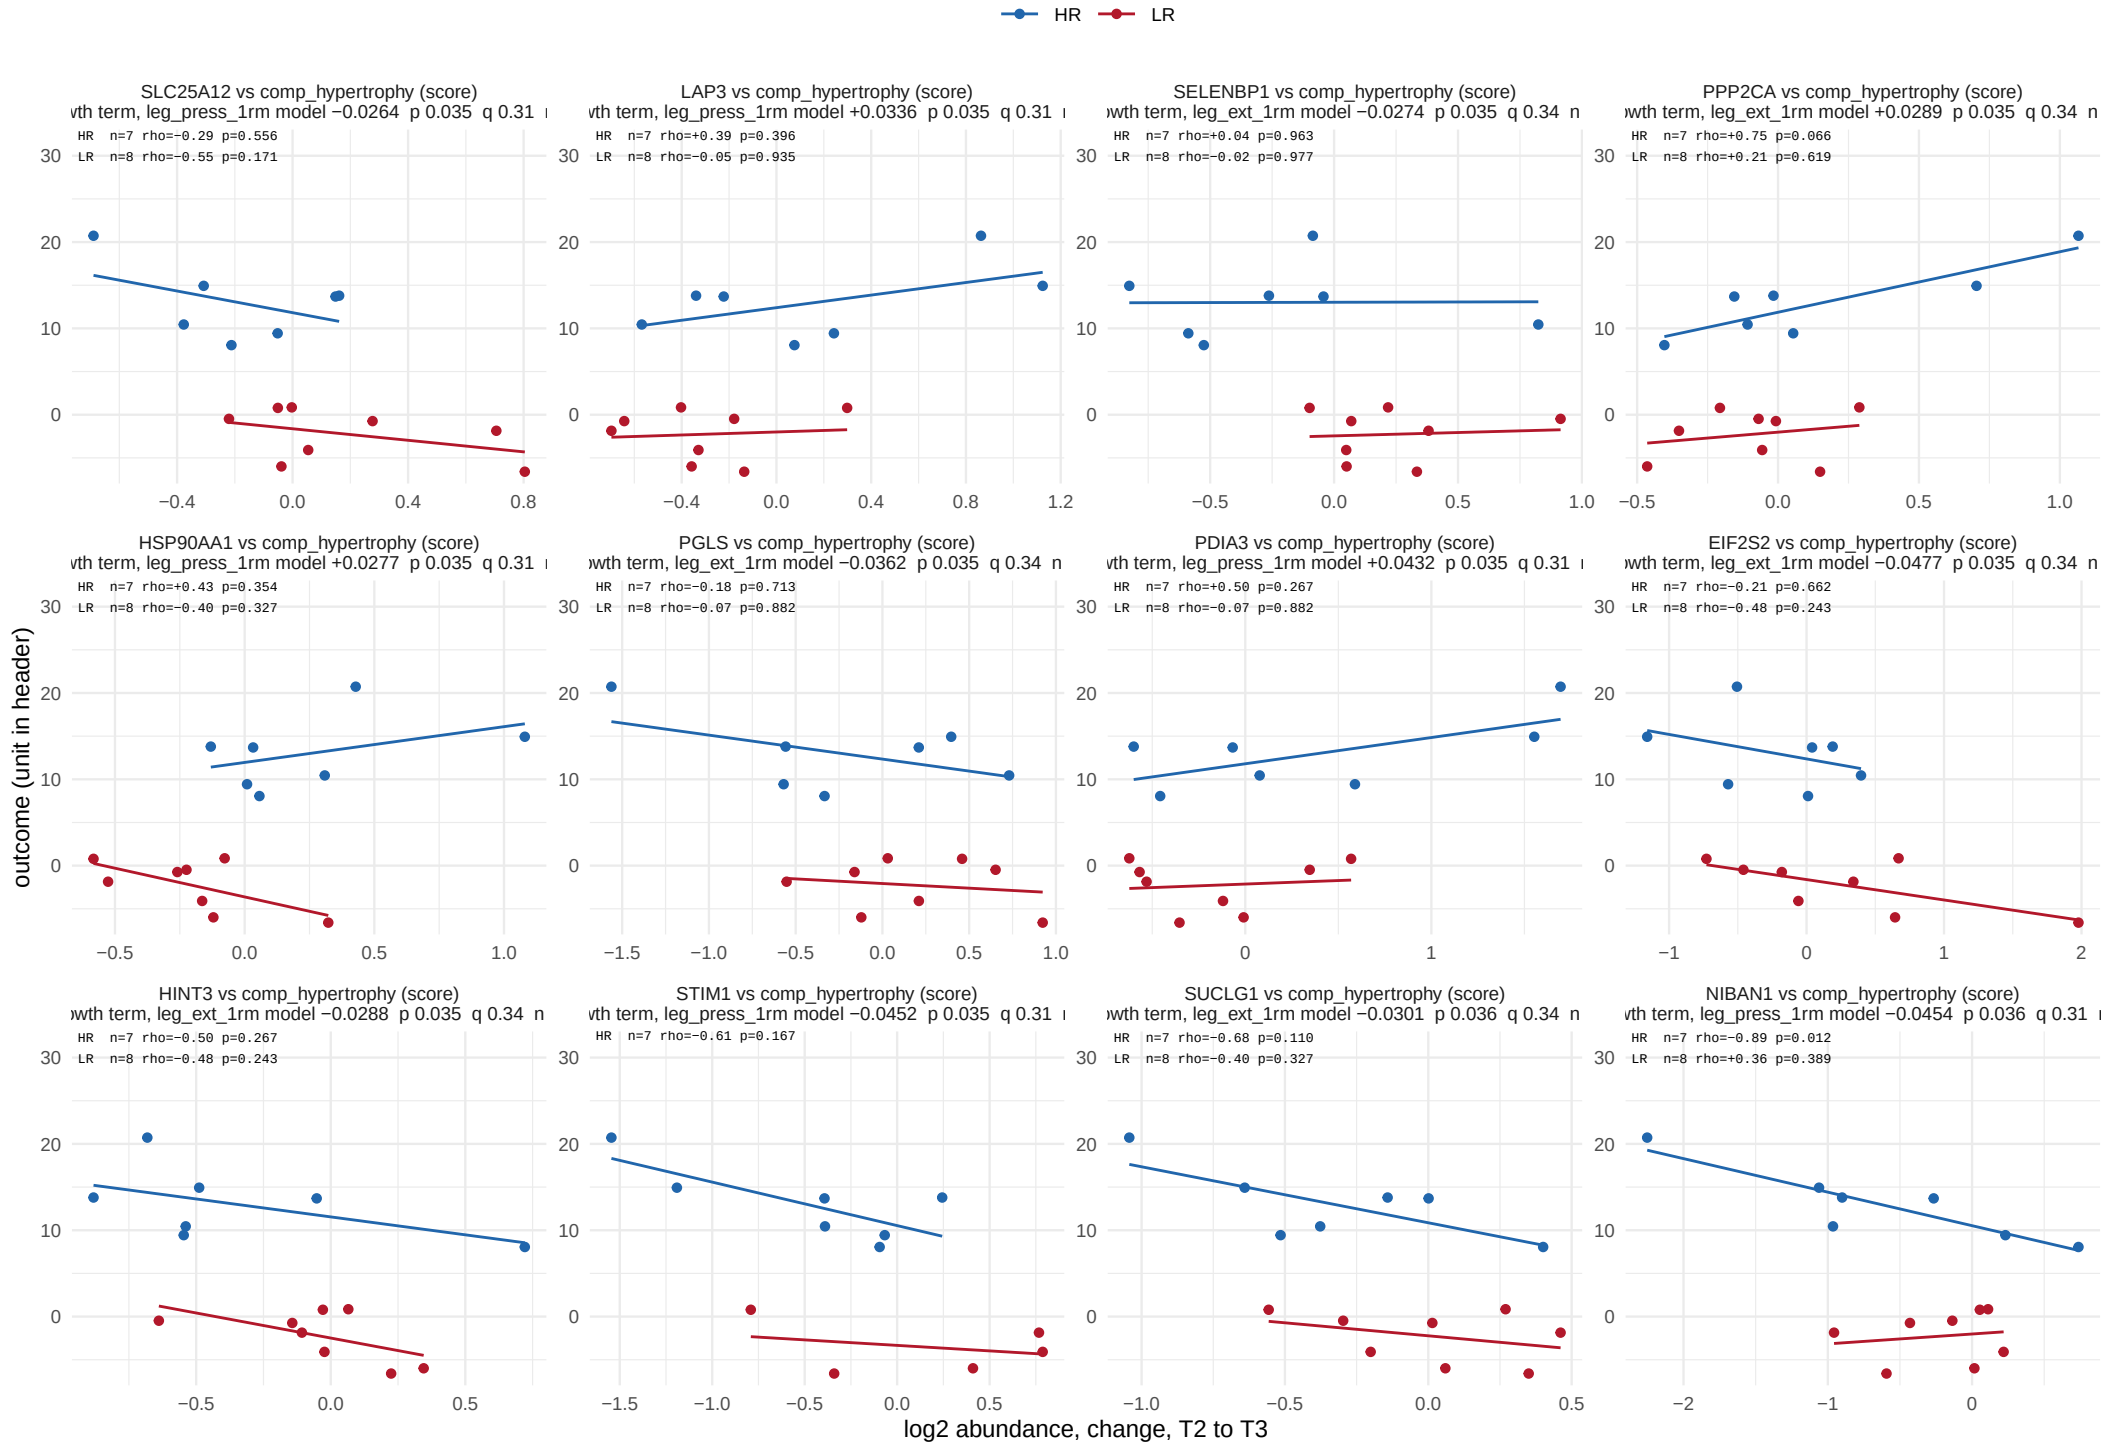

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, acute window


465 of 5806 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 31 of 39.

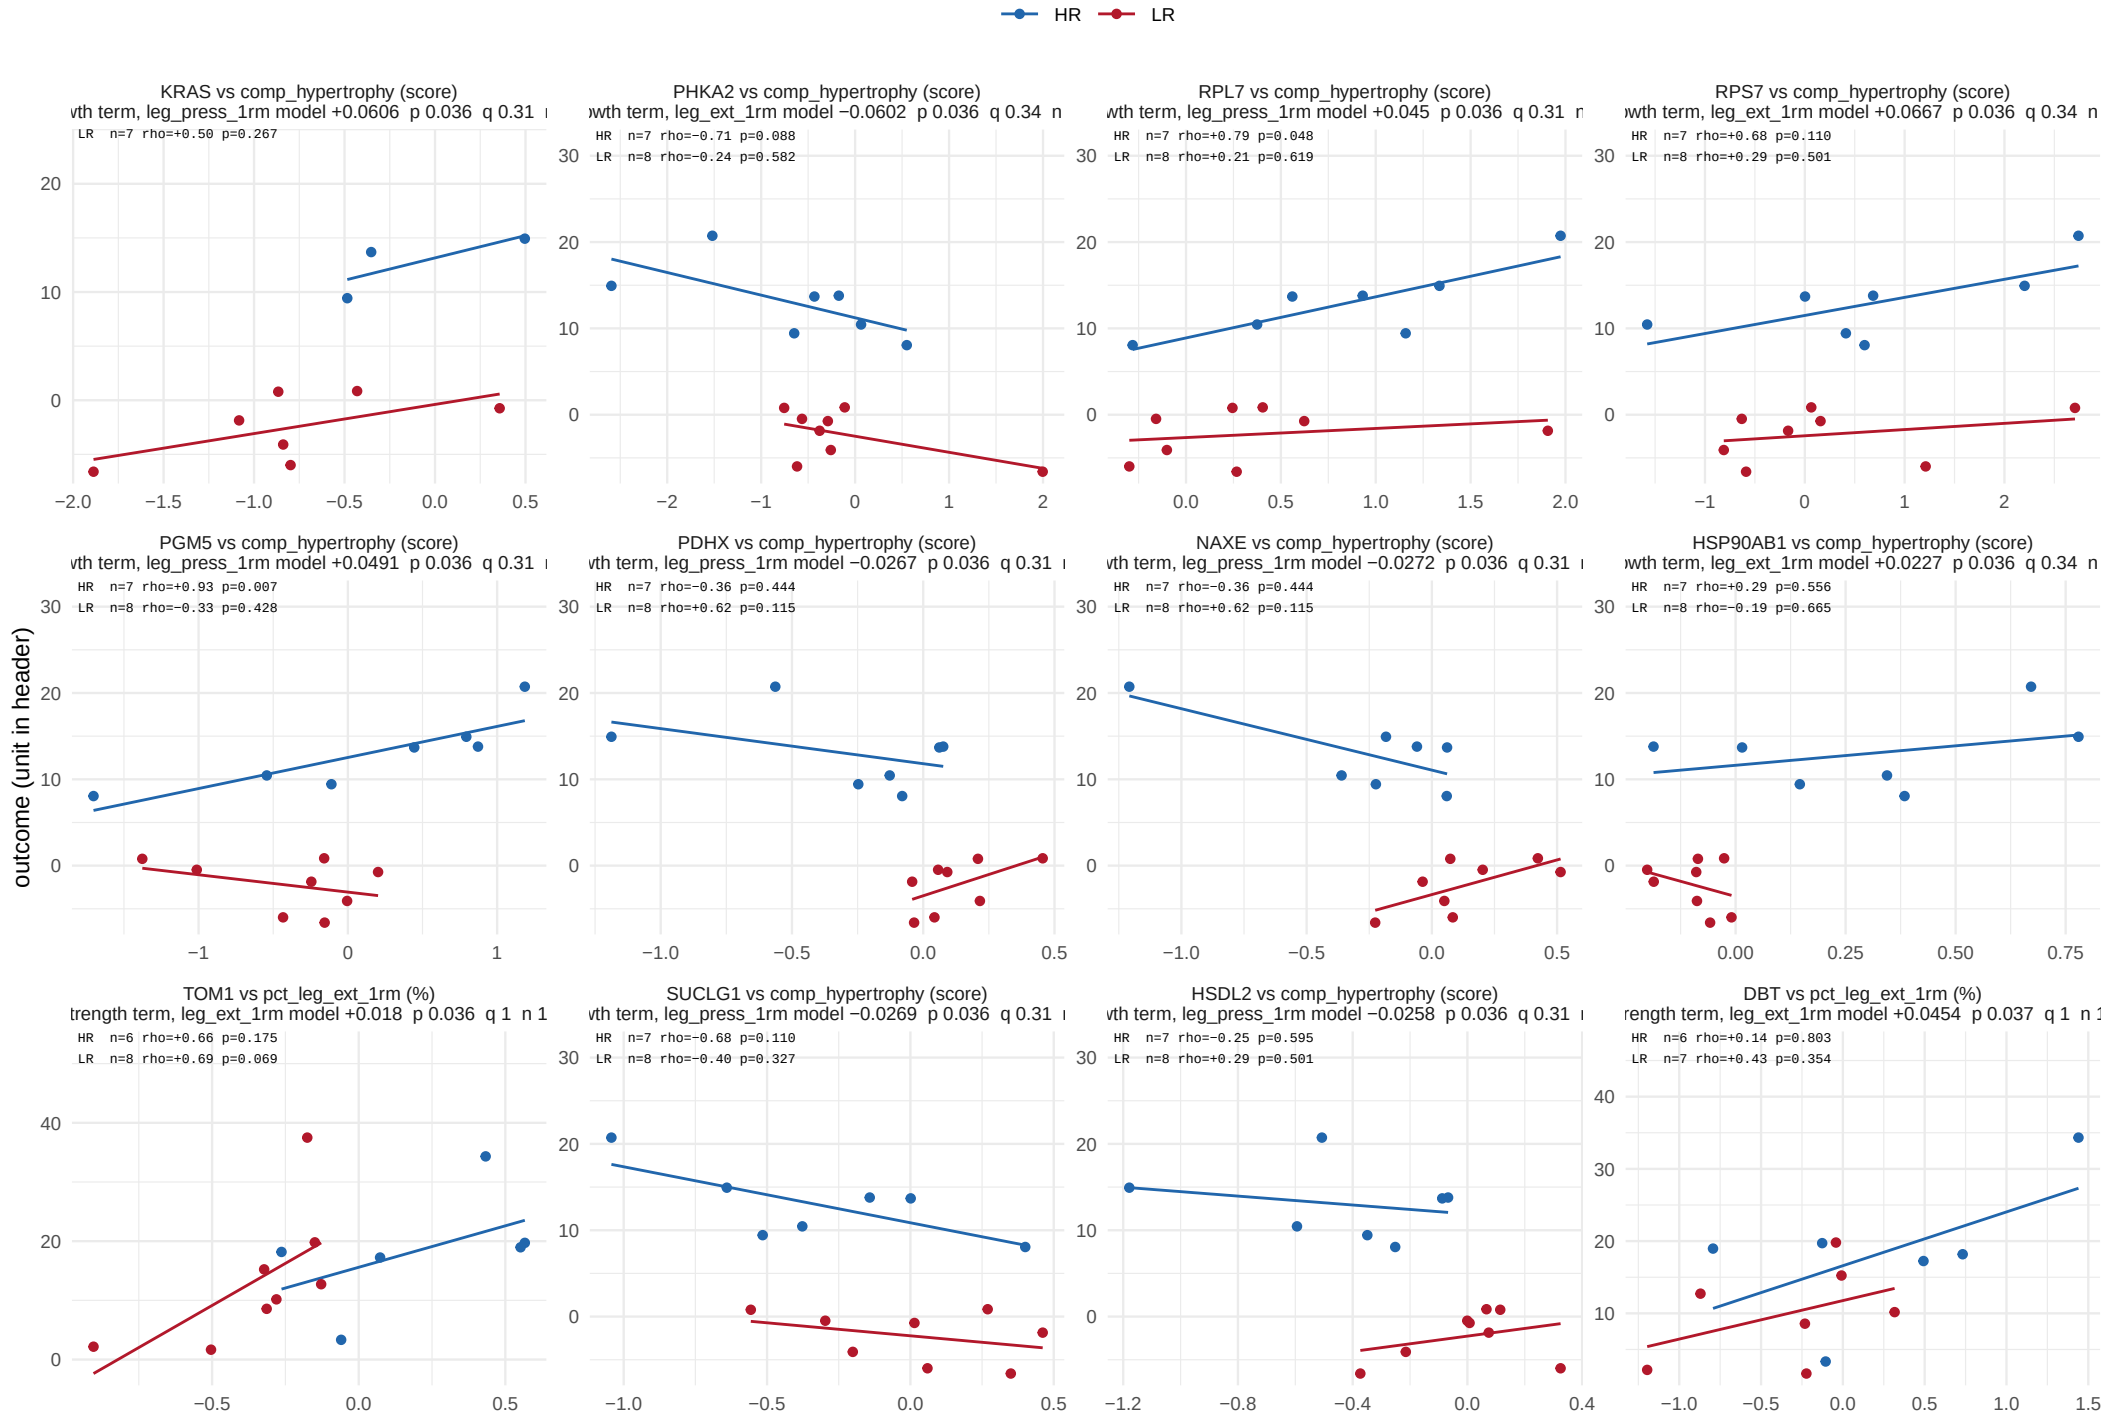

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, acute window


465 of 5806 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 32 of 39.

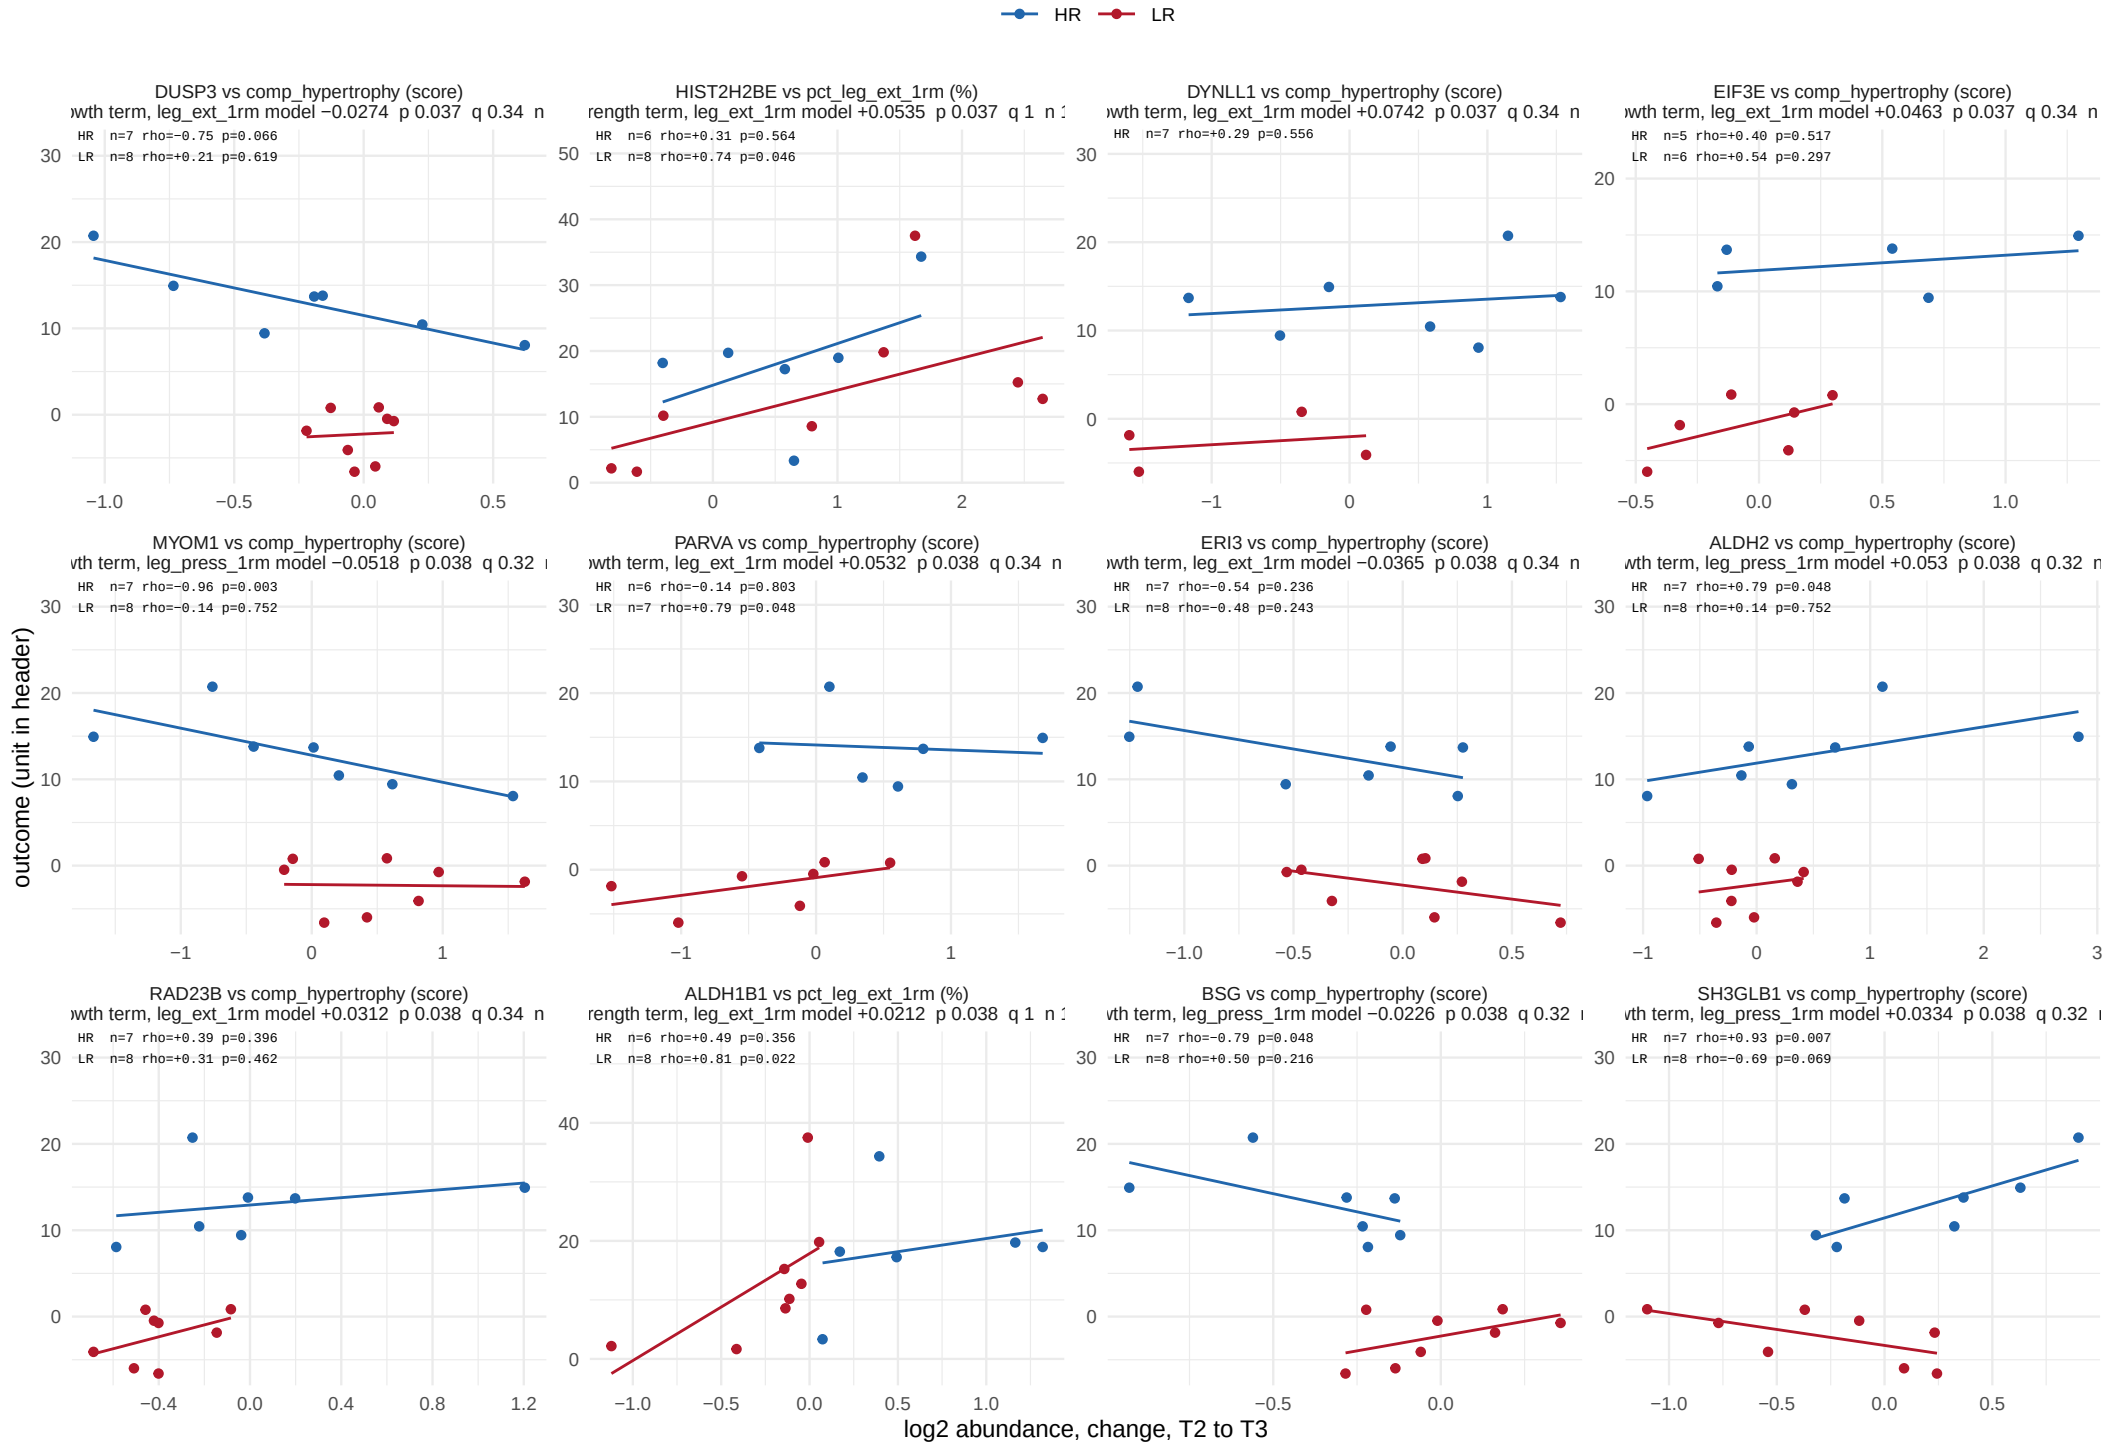

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, acute window


465 of 5806 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 33 of 39.

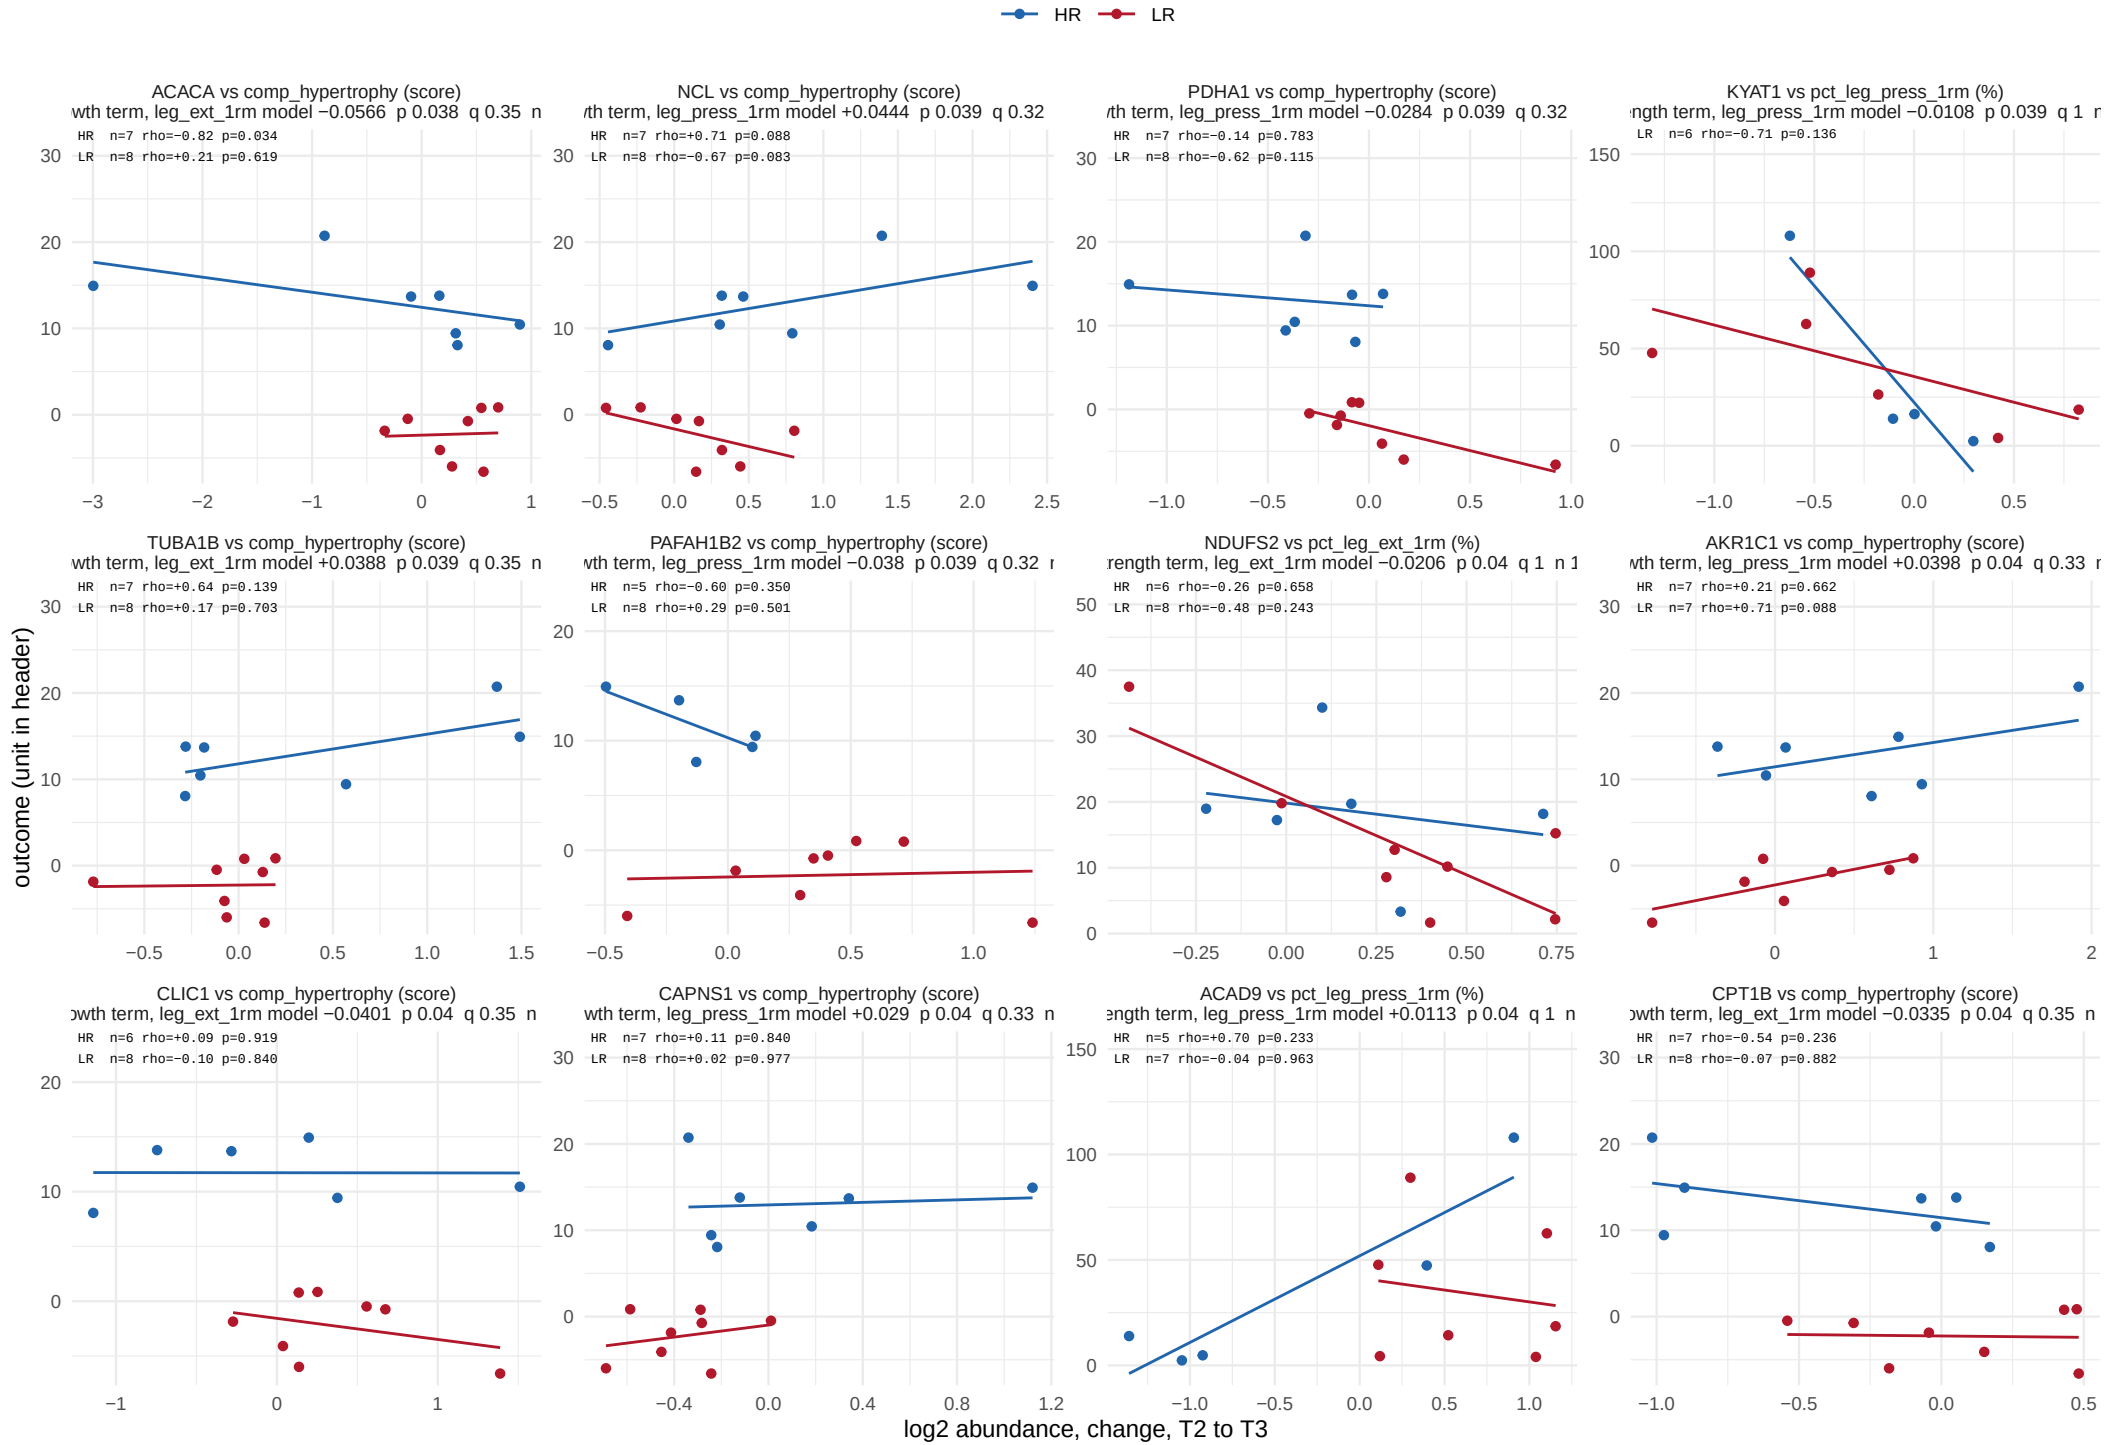

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, acute window


465 of 5806 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 34 of 39.

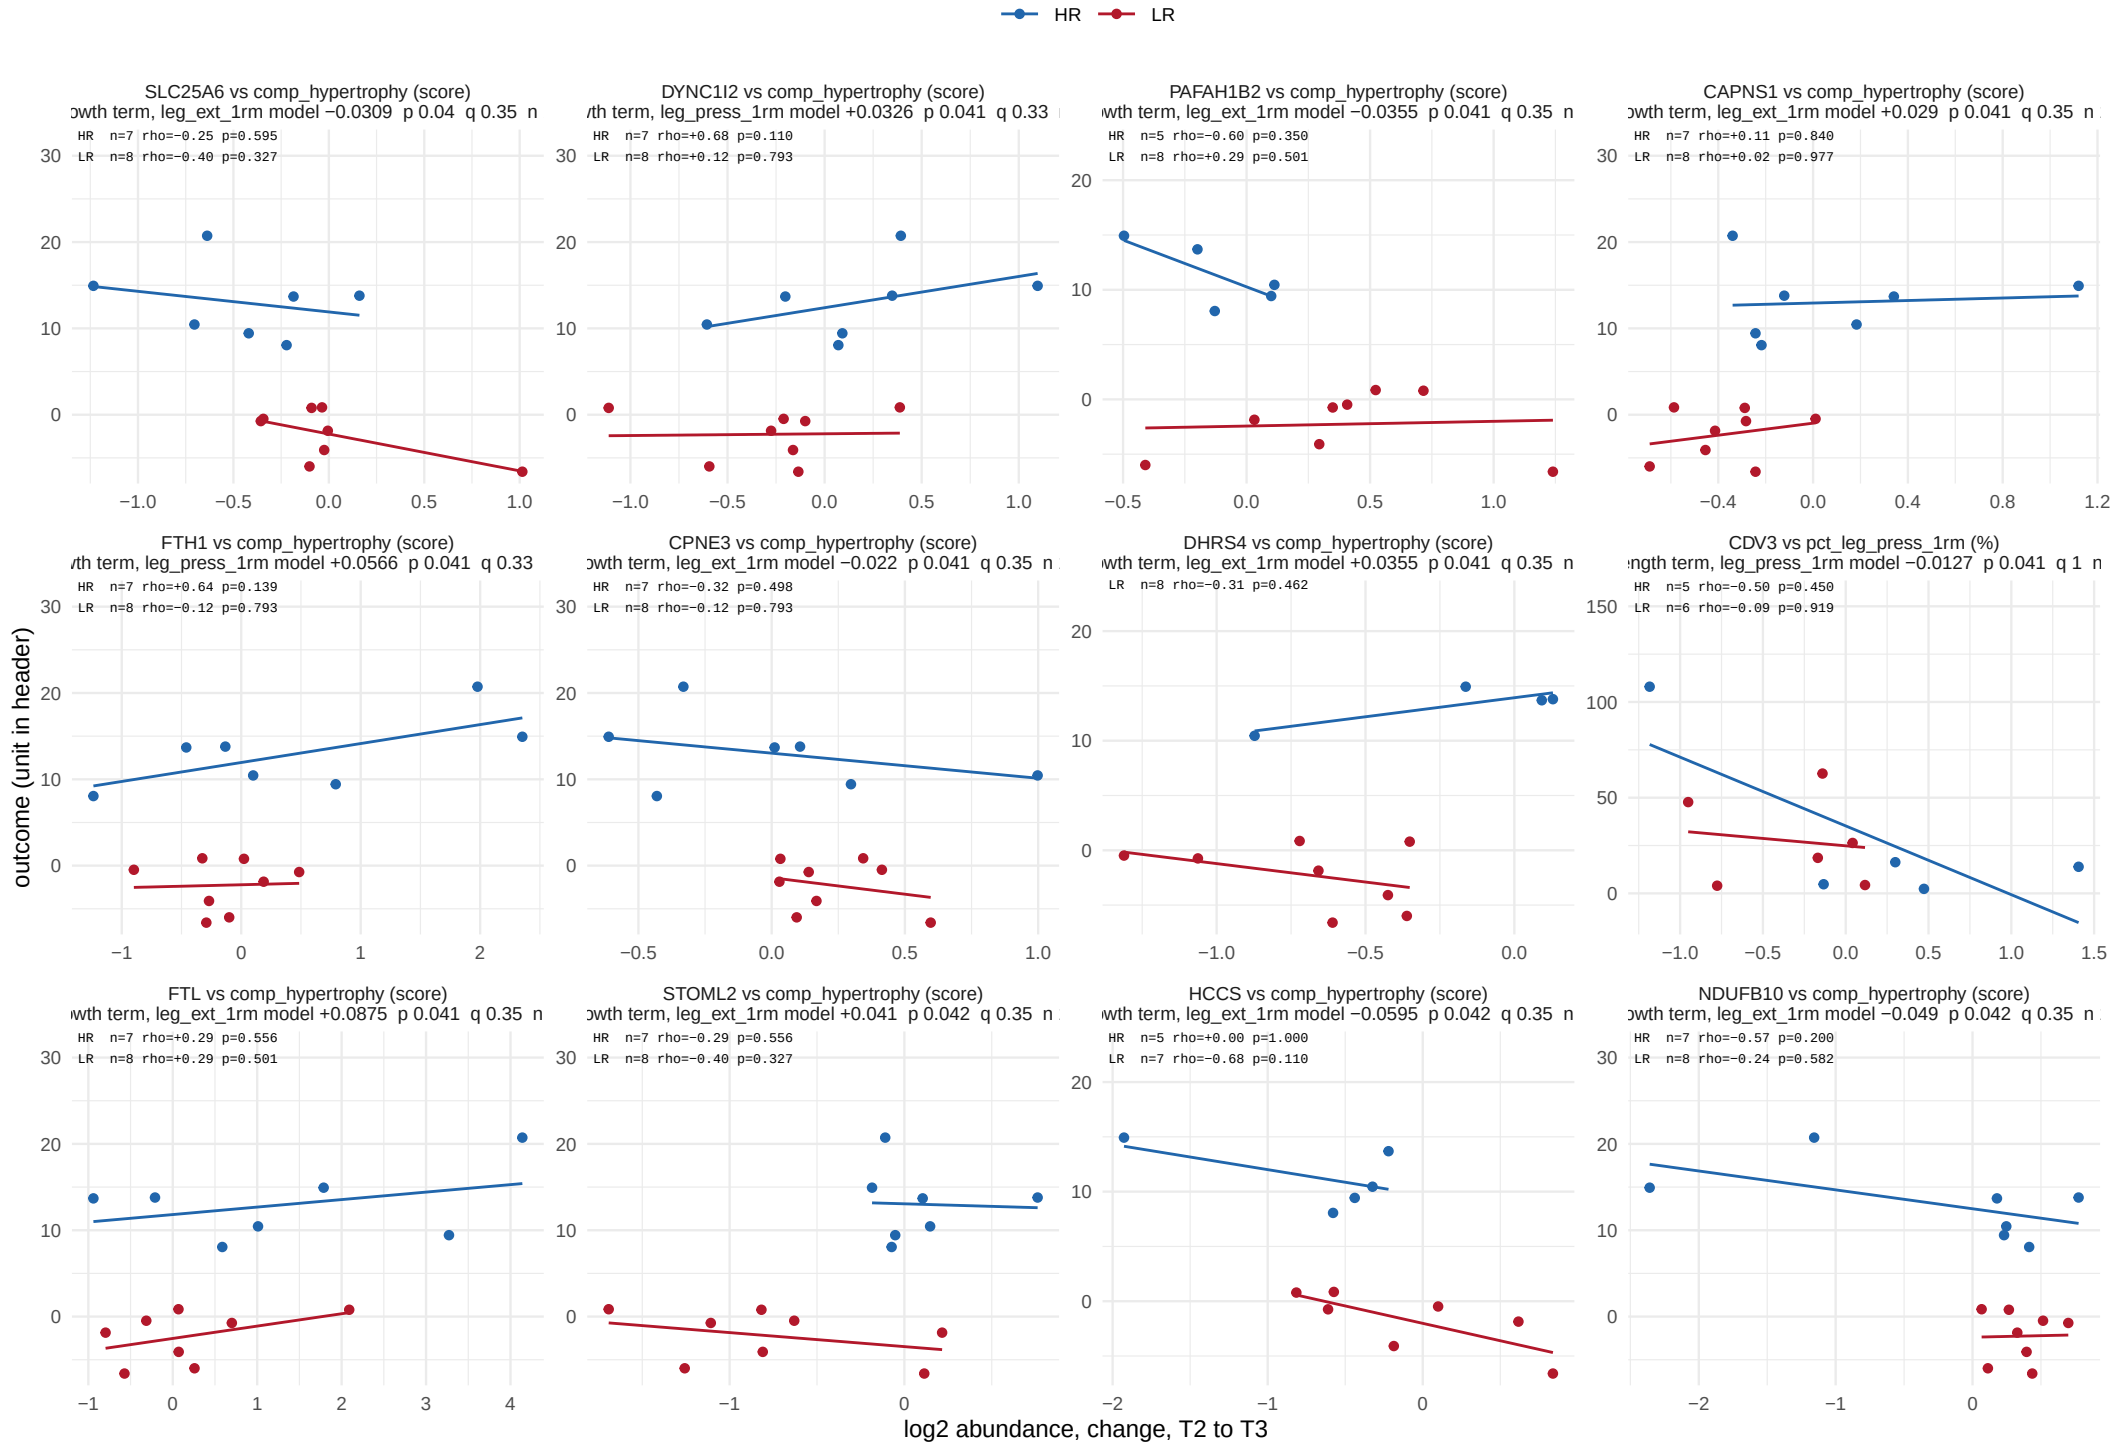

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, acute window


465 of 5806 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 35 of 39.

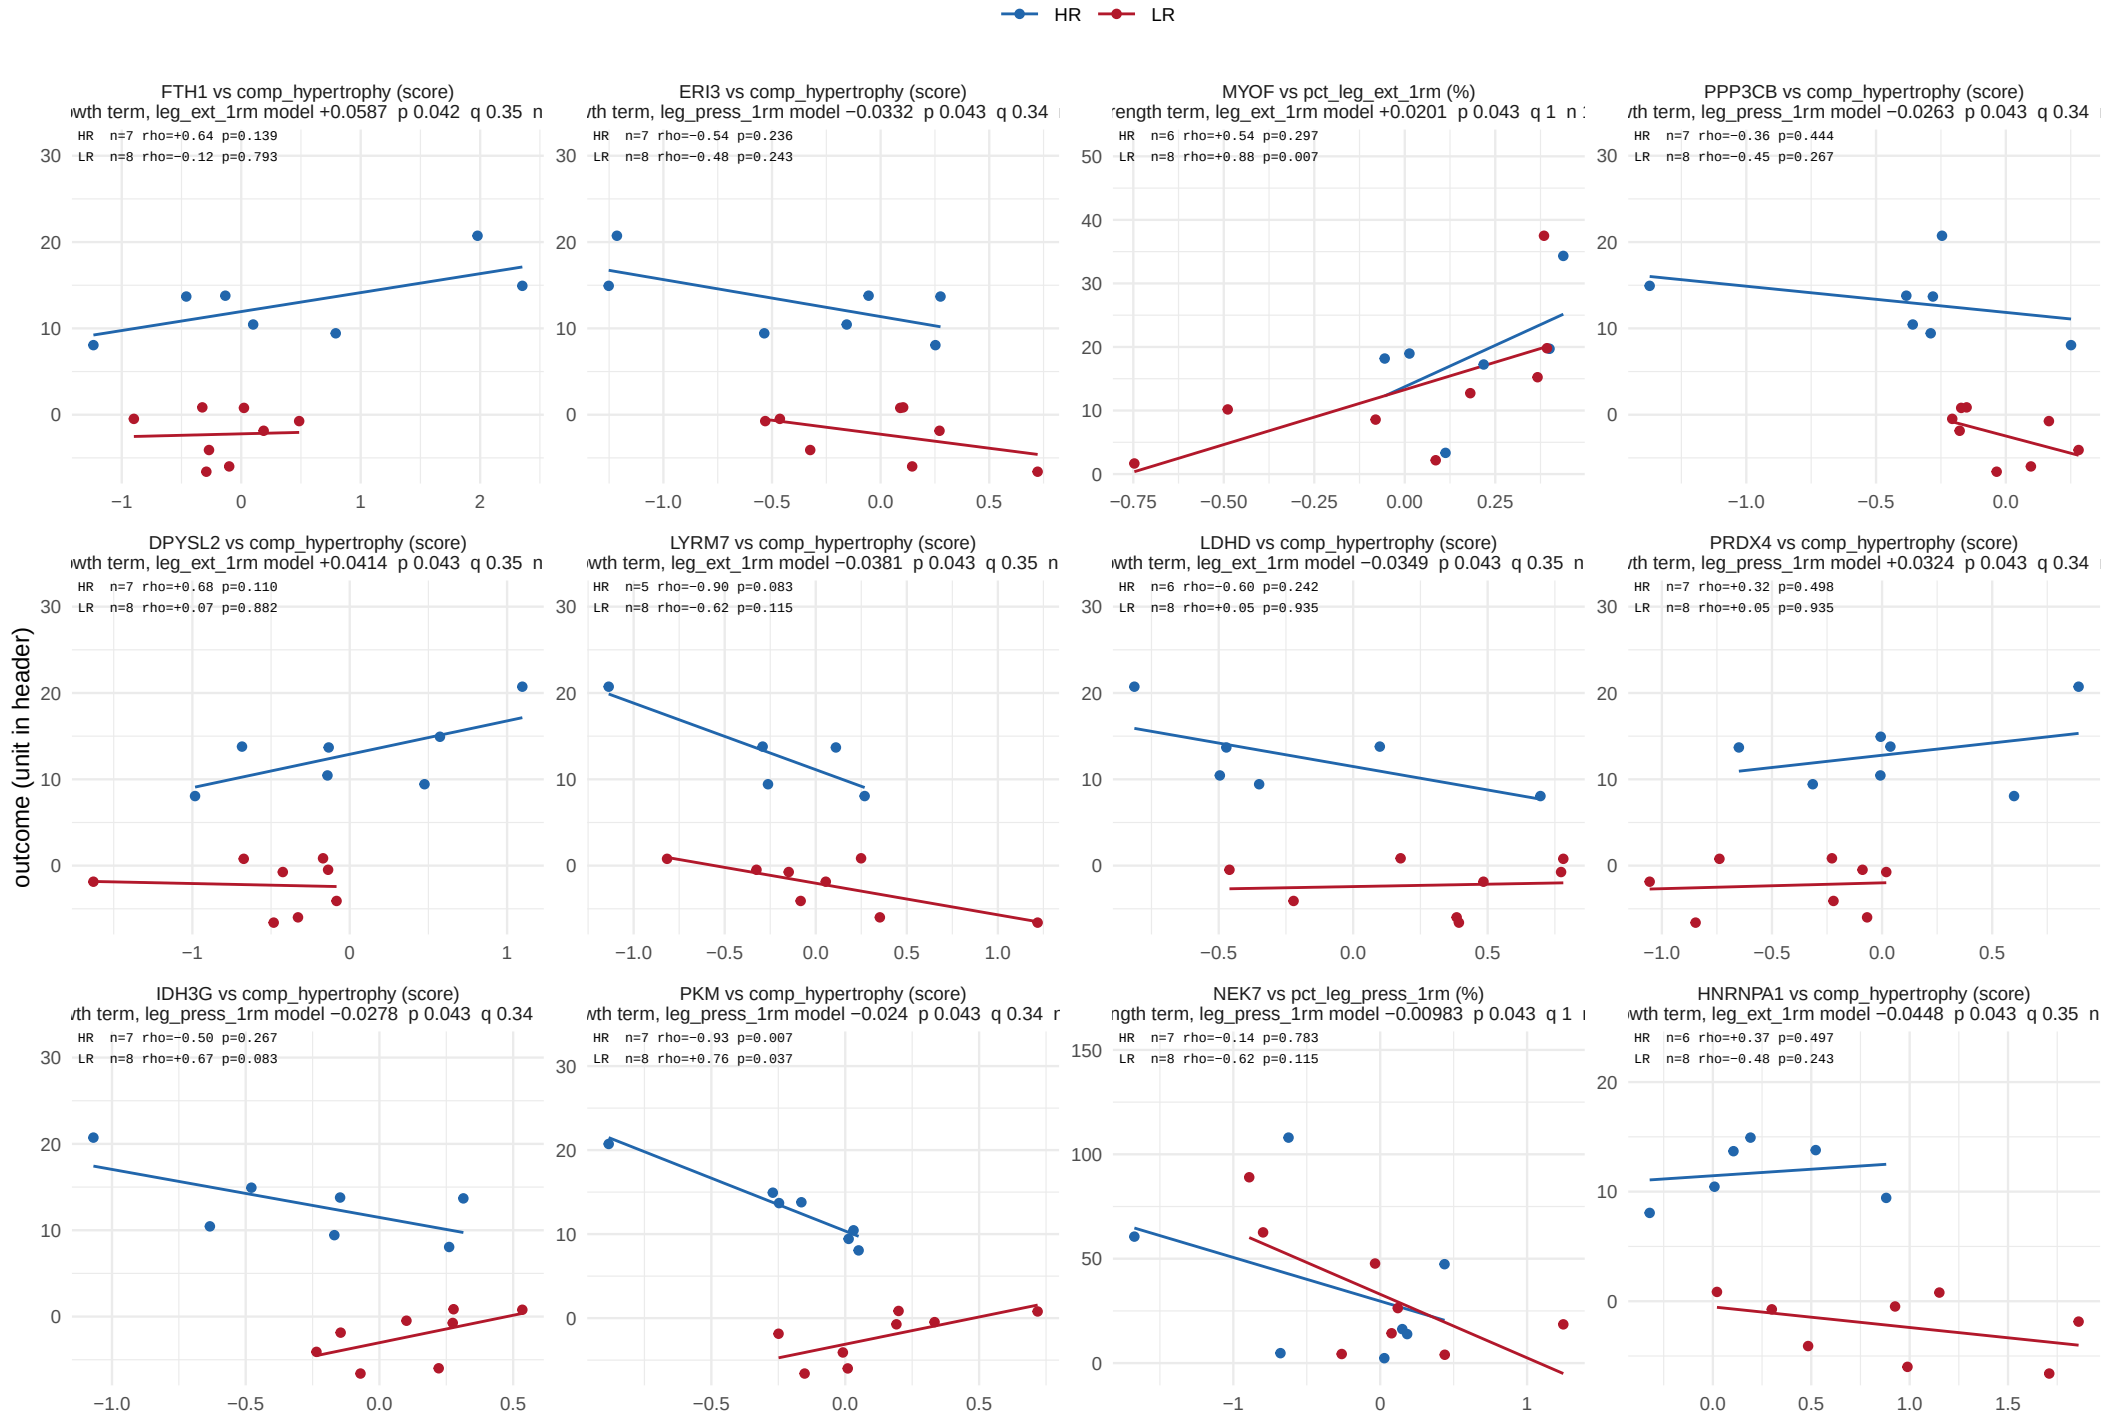

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, acute window


465 of 5806 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 36 of 39.

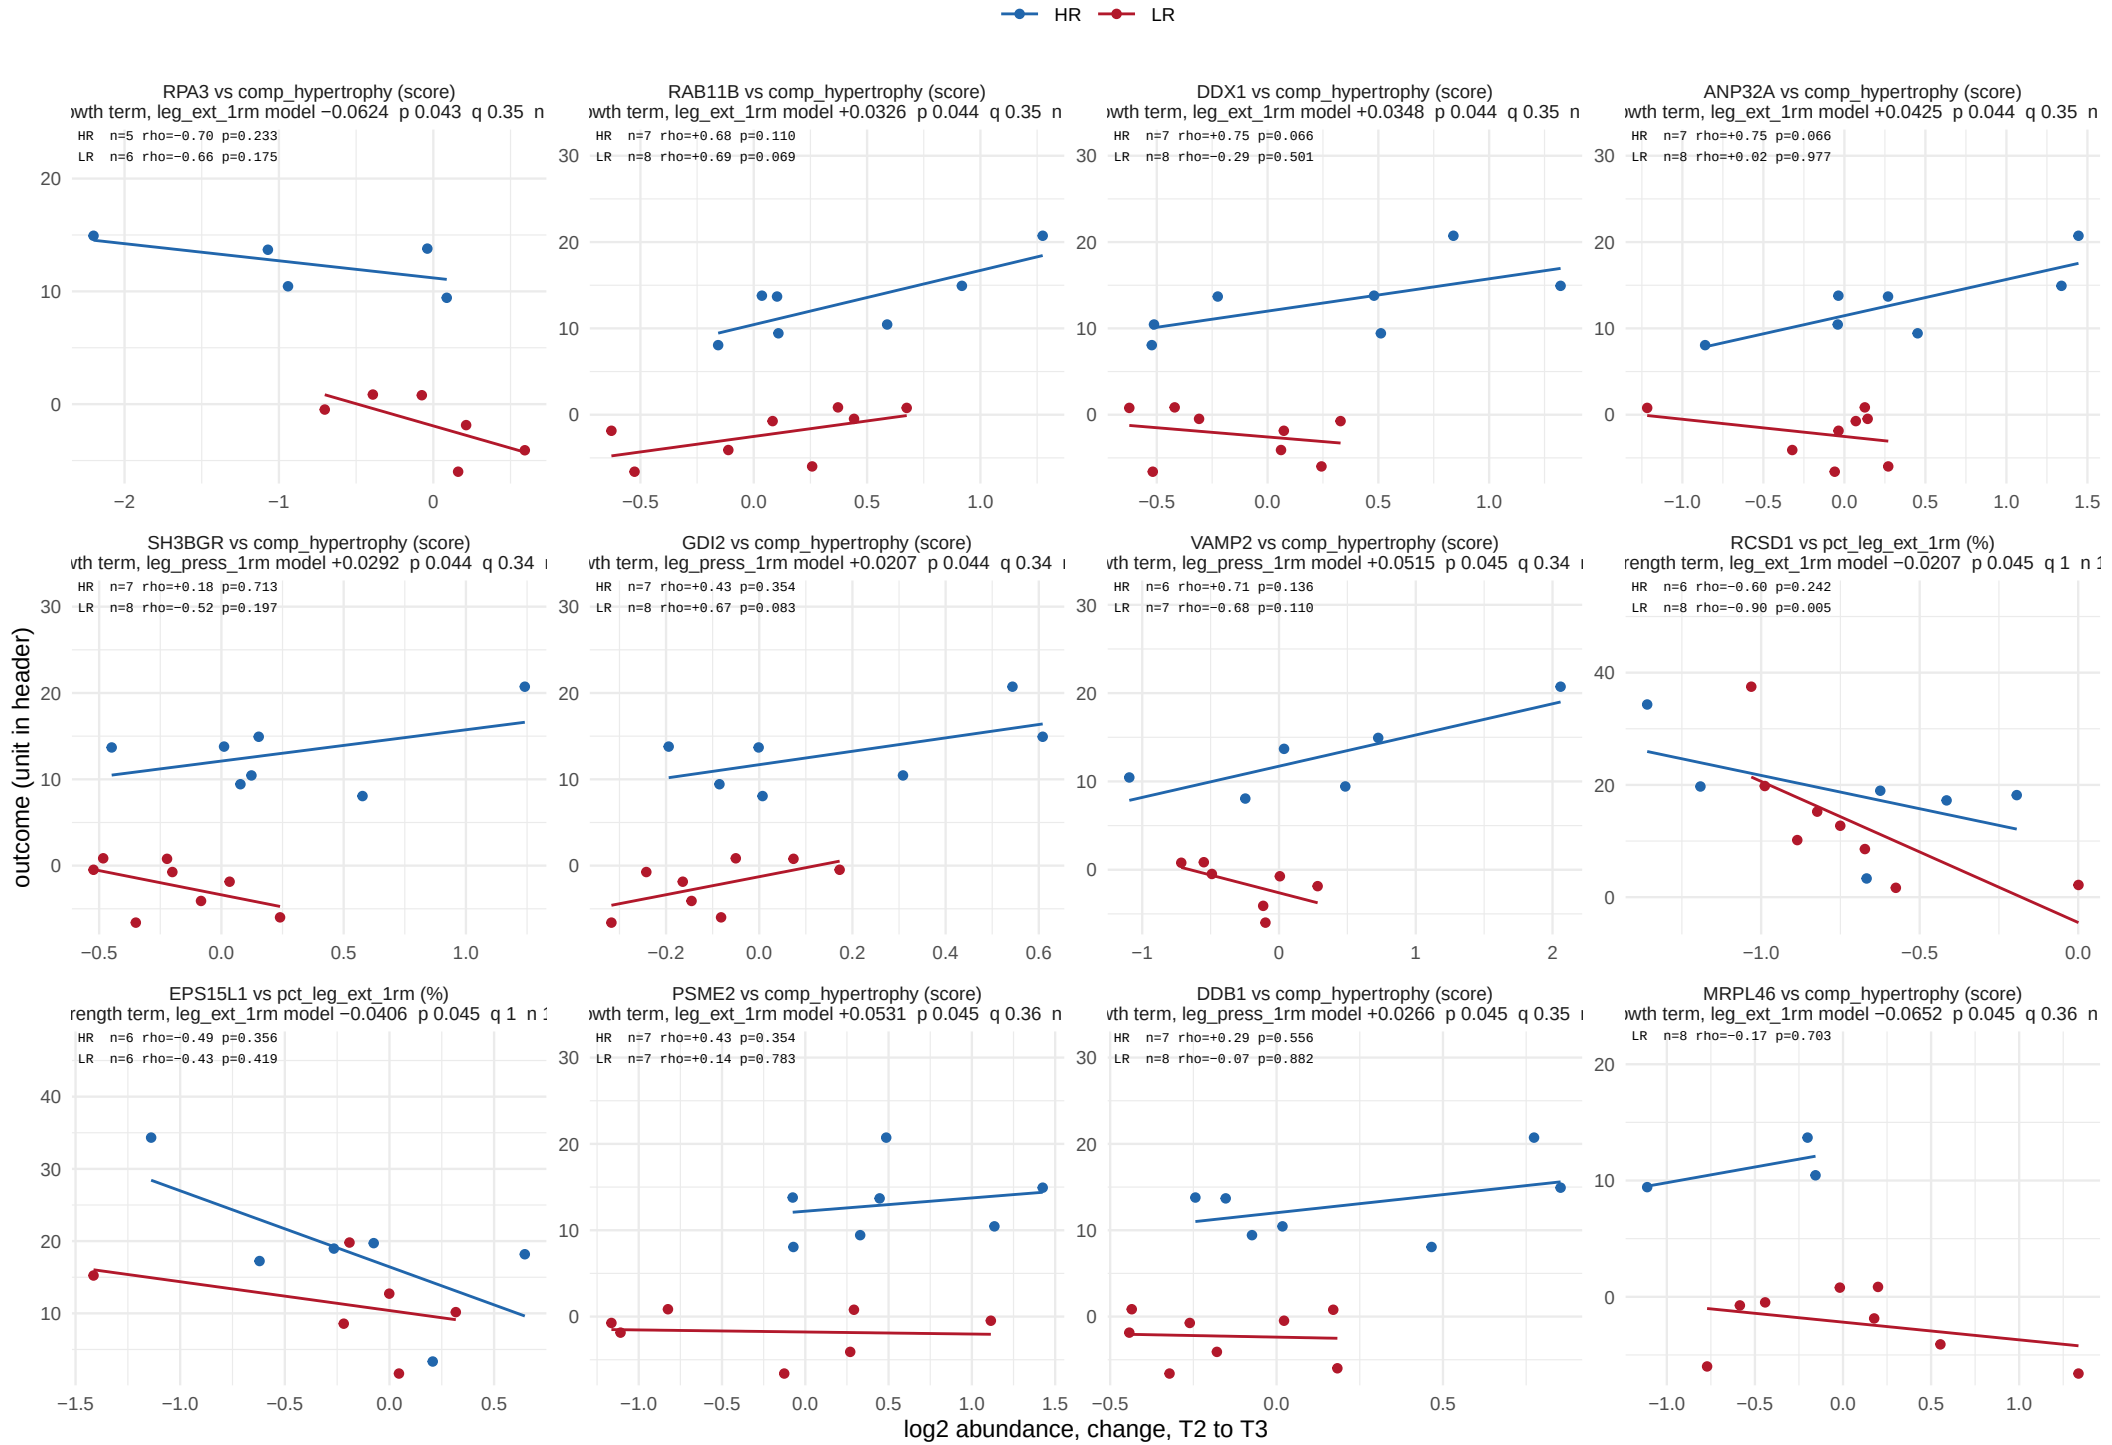

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.


Two predictor, acute window

465 of 5806 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 37 of 39.

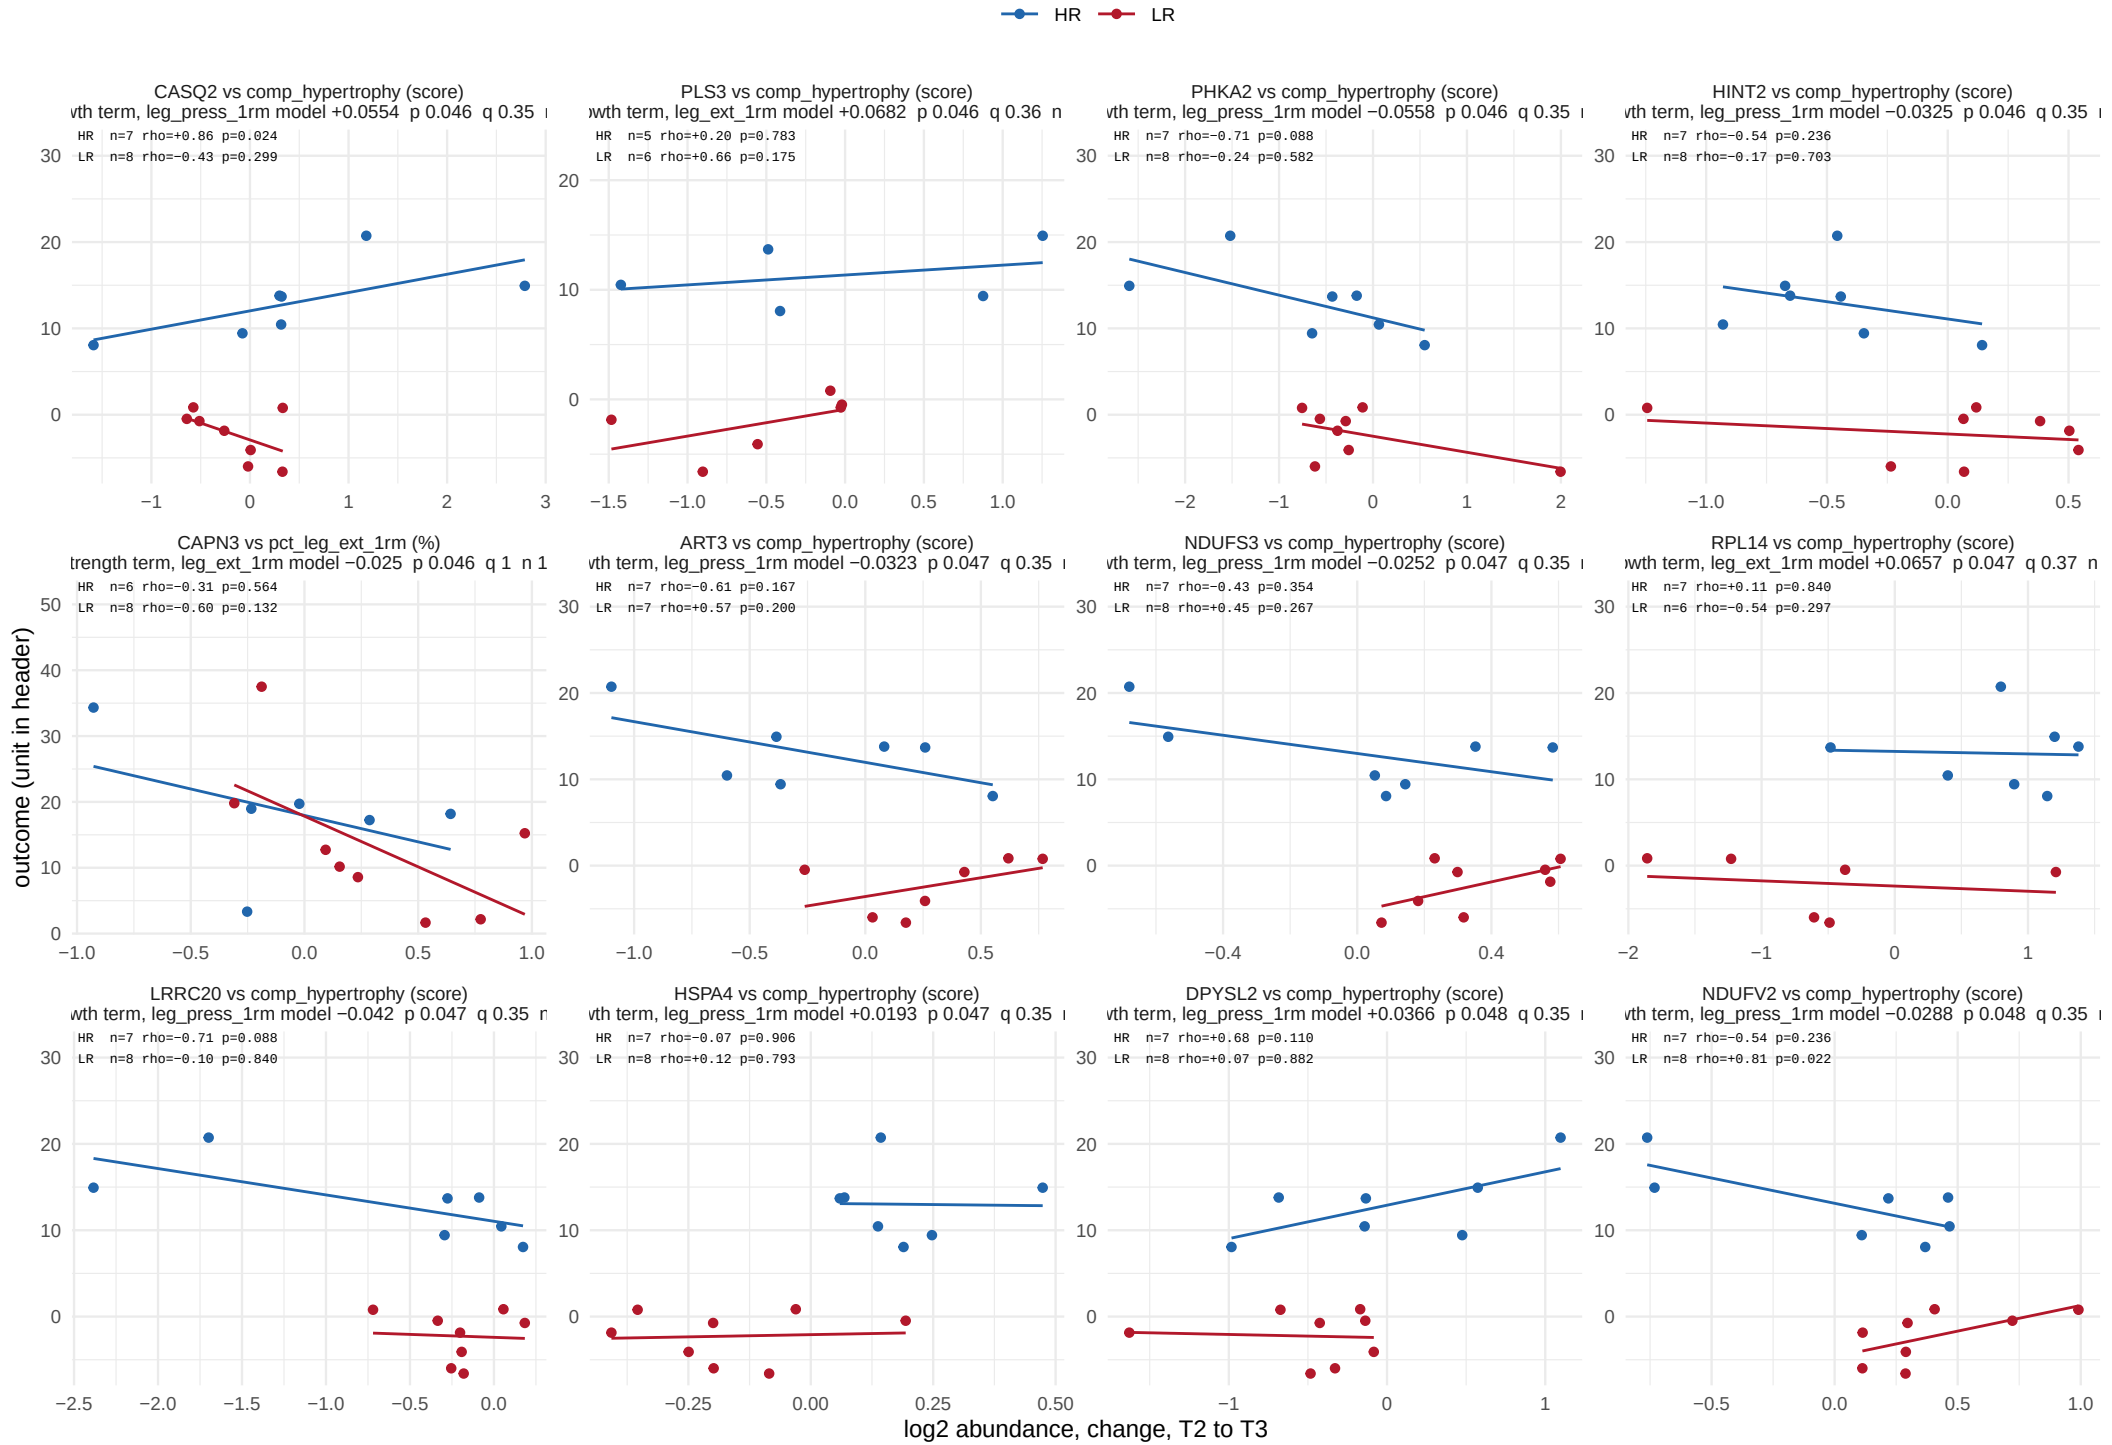

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.


Two predictor, acute window

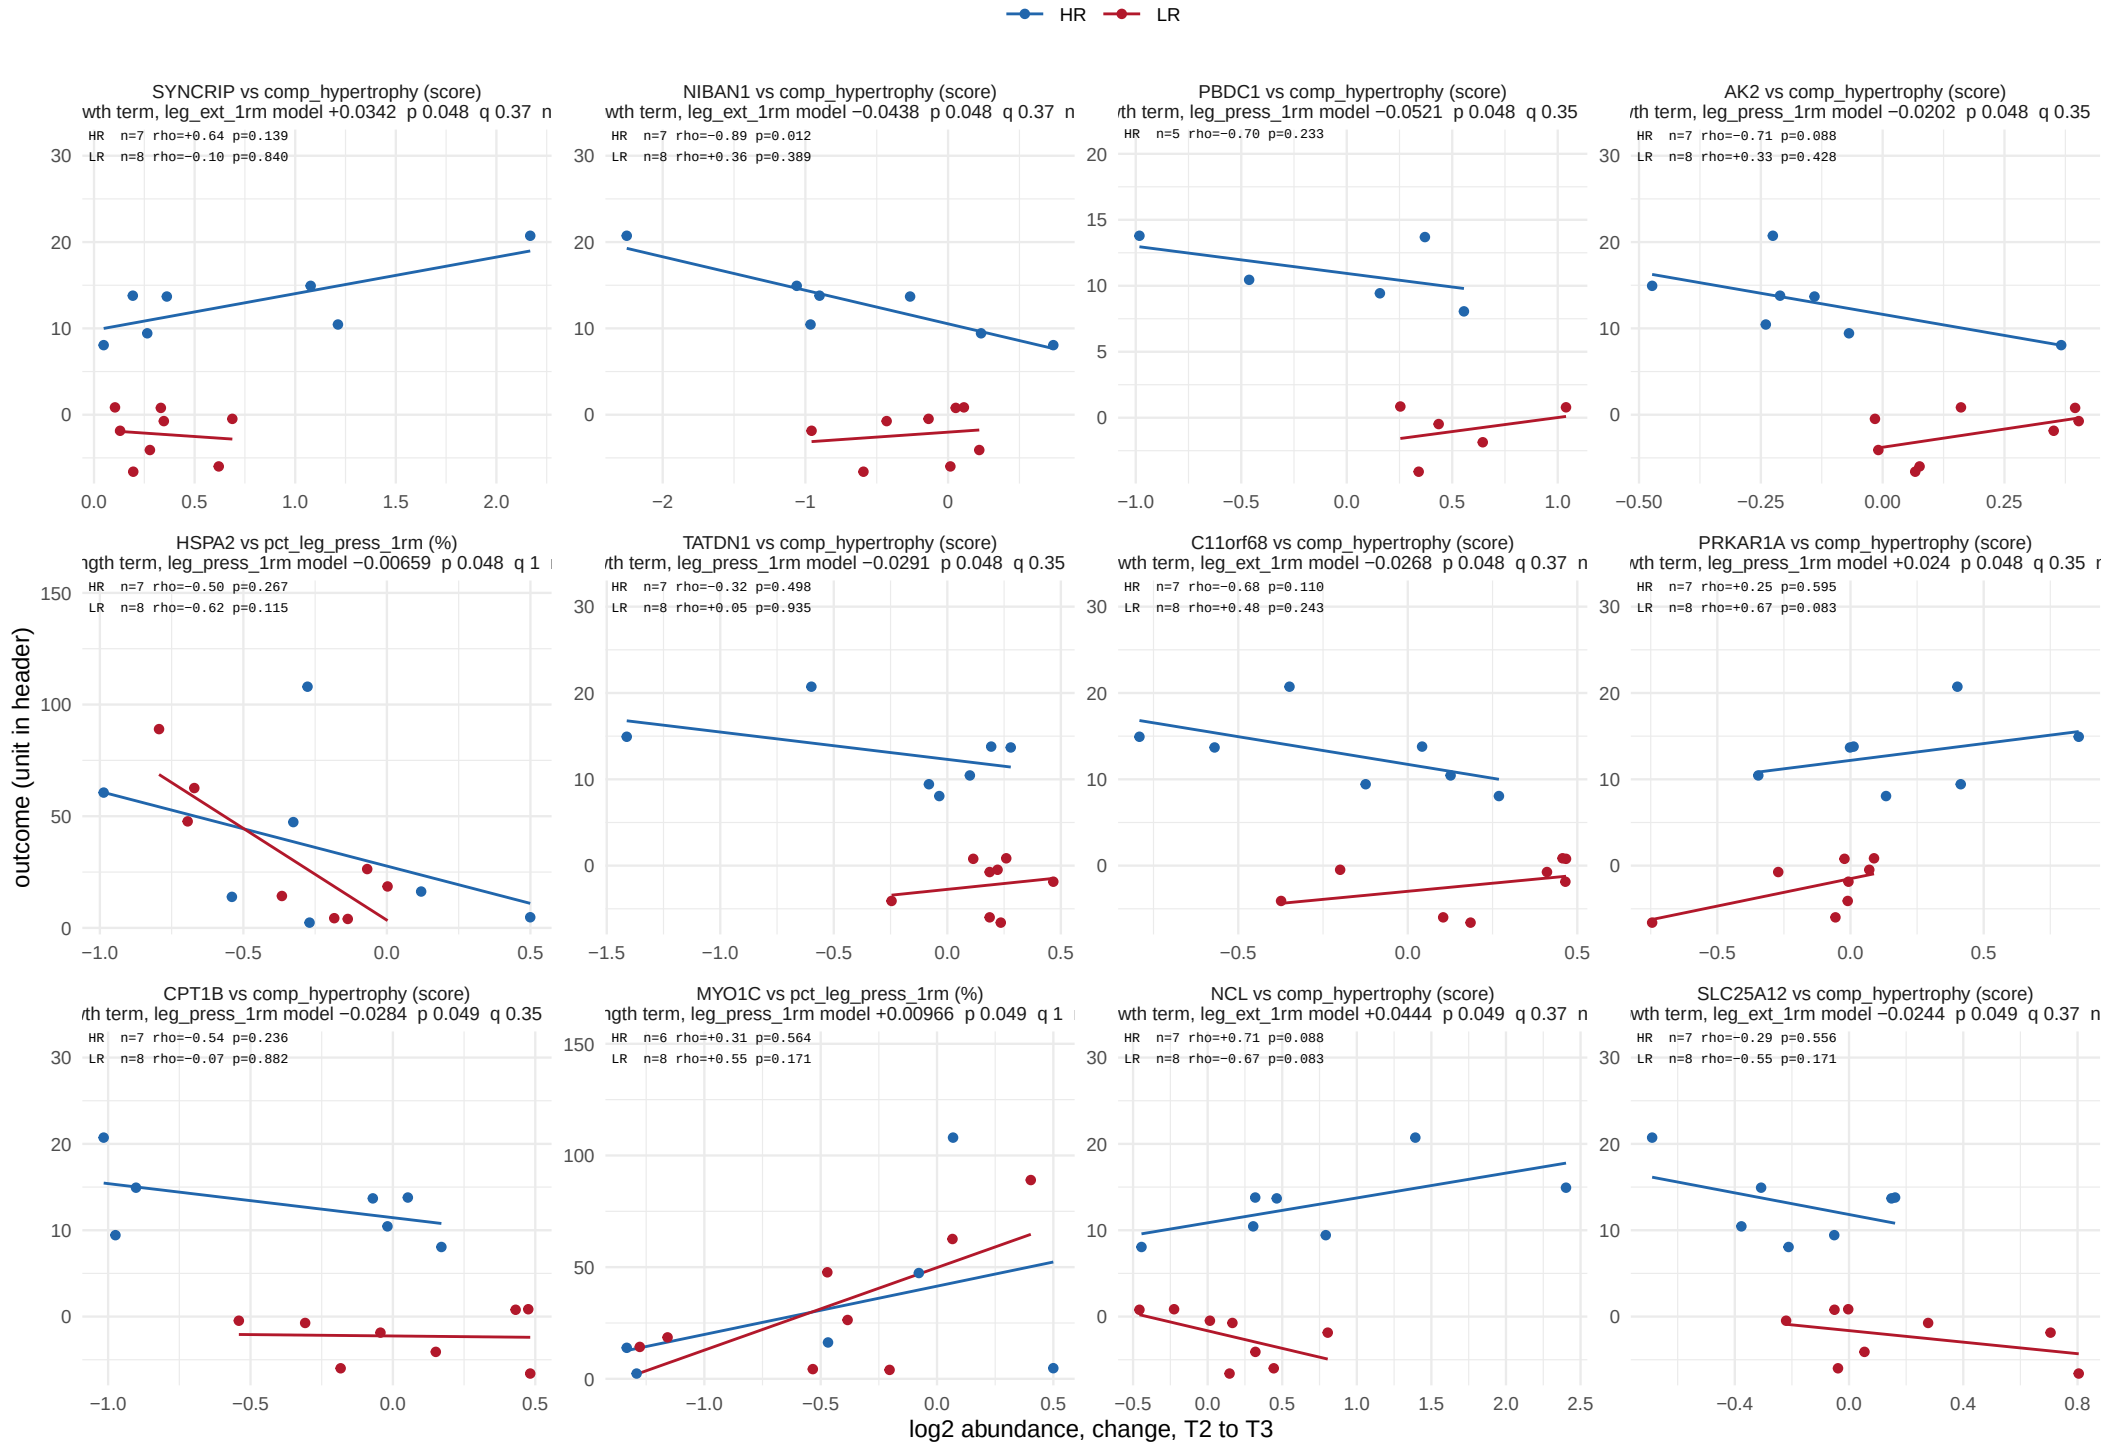

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, acute window

465 of 5806 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 39 of 39.

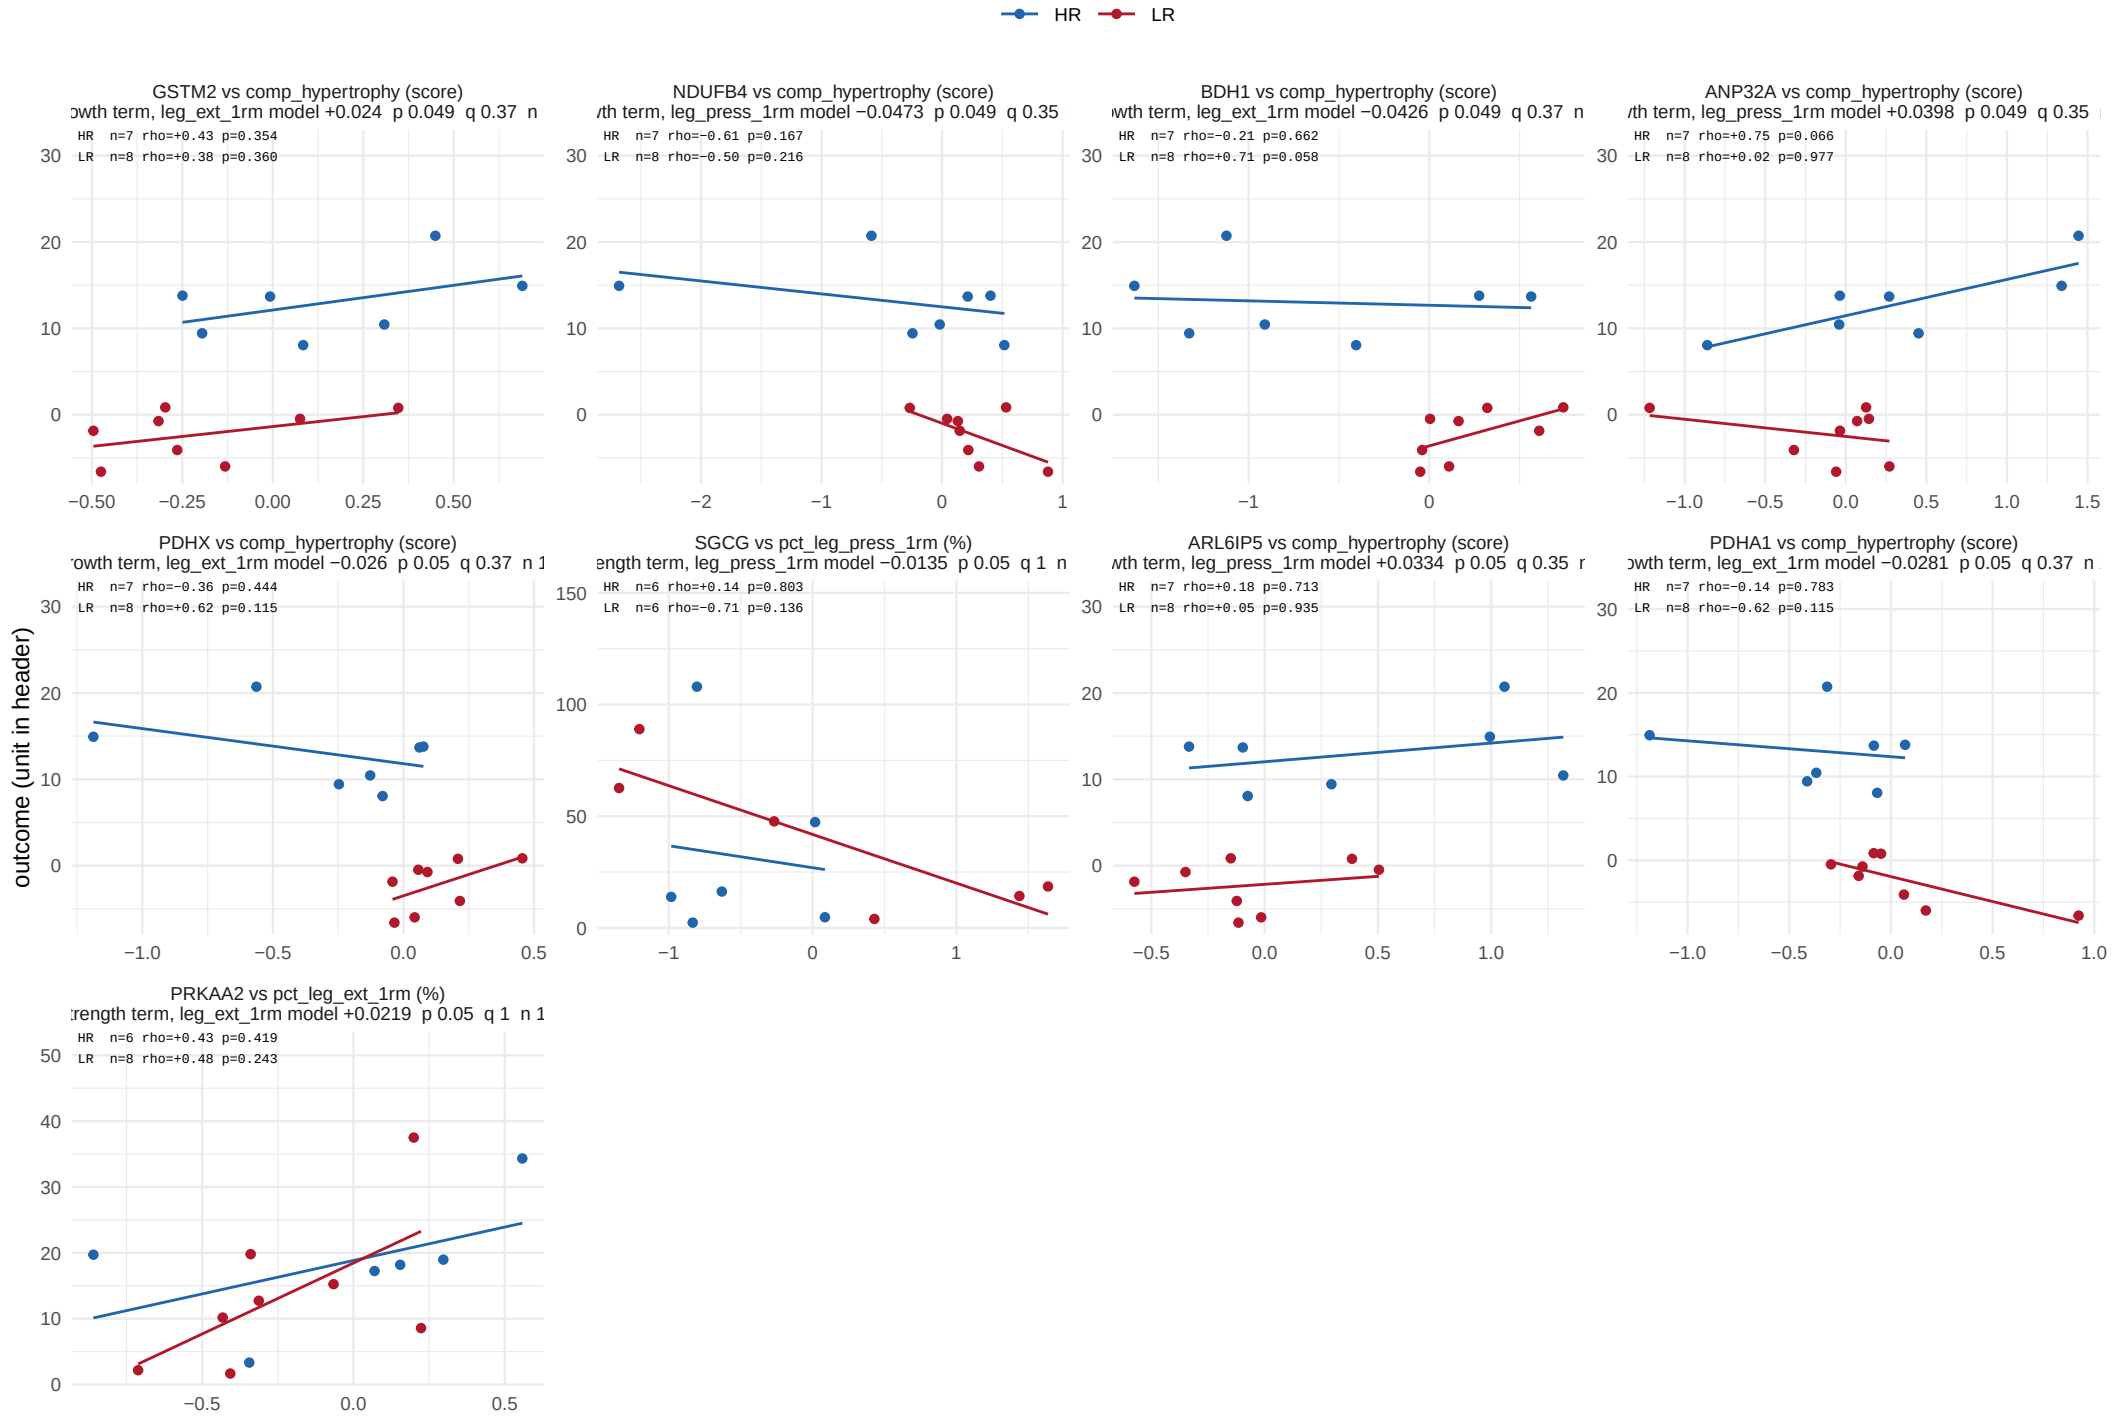

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.