
# Sample model overview: Hallmark

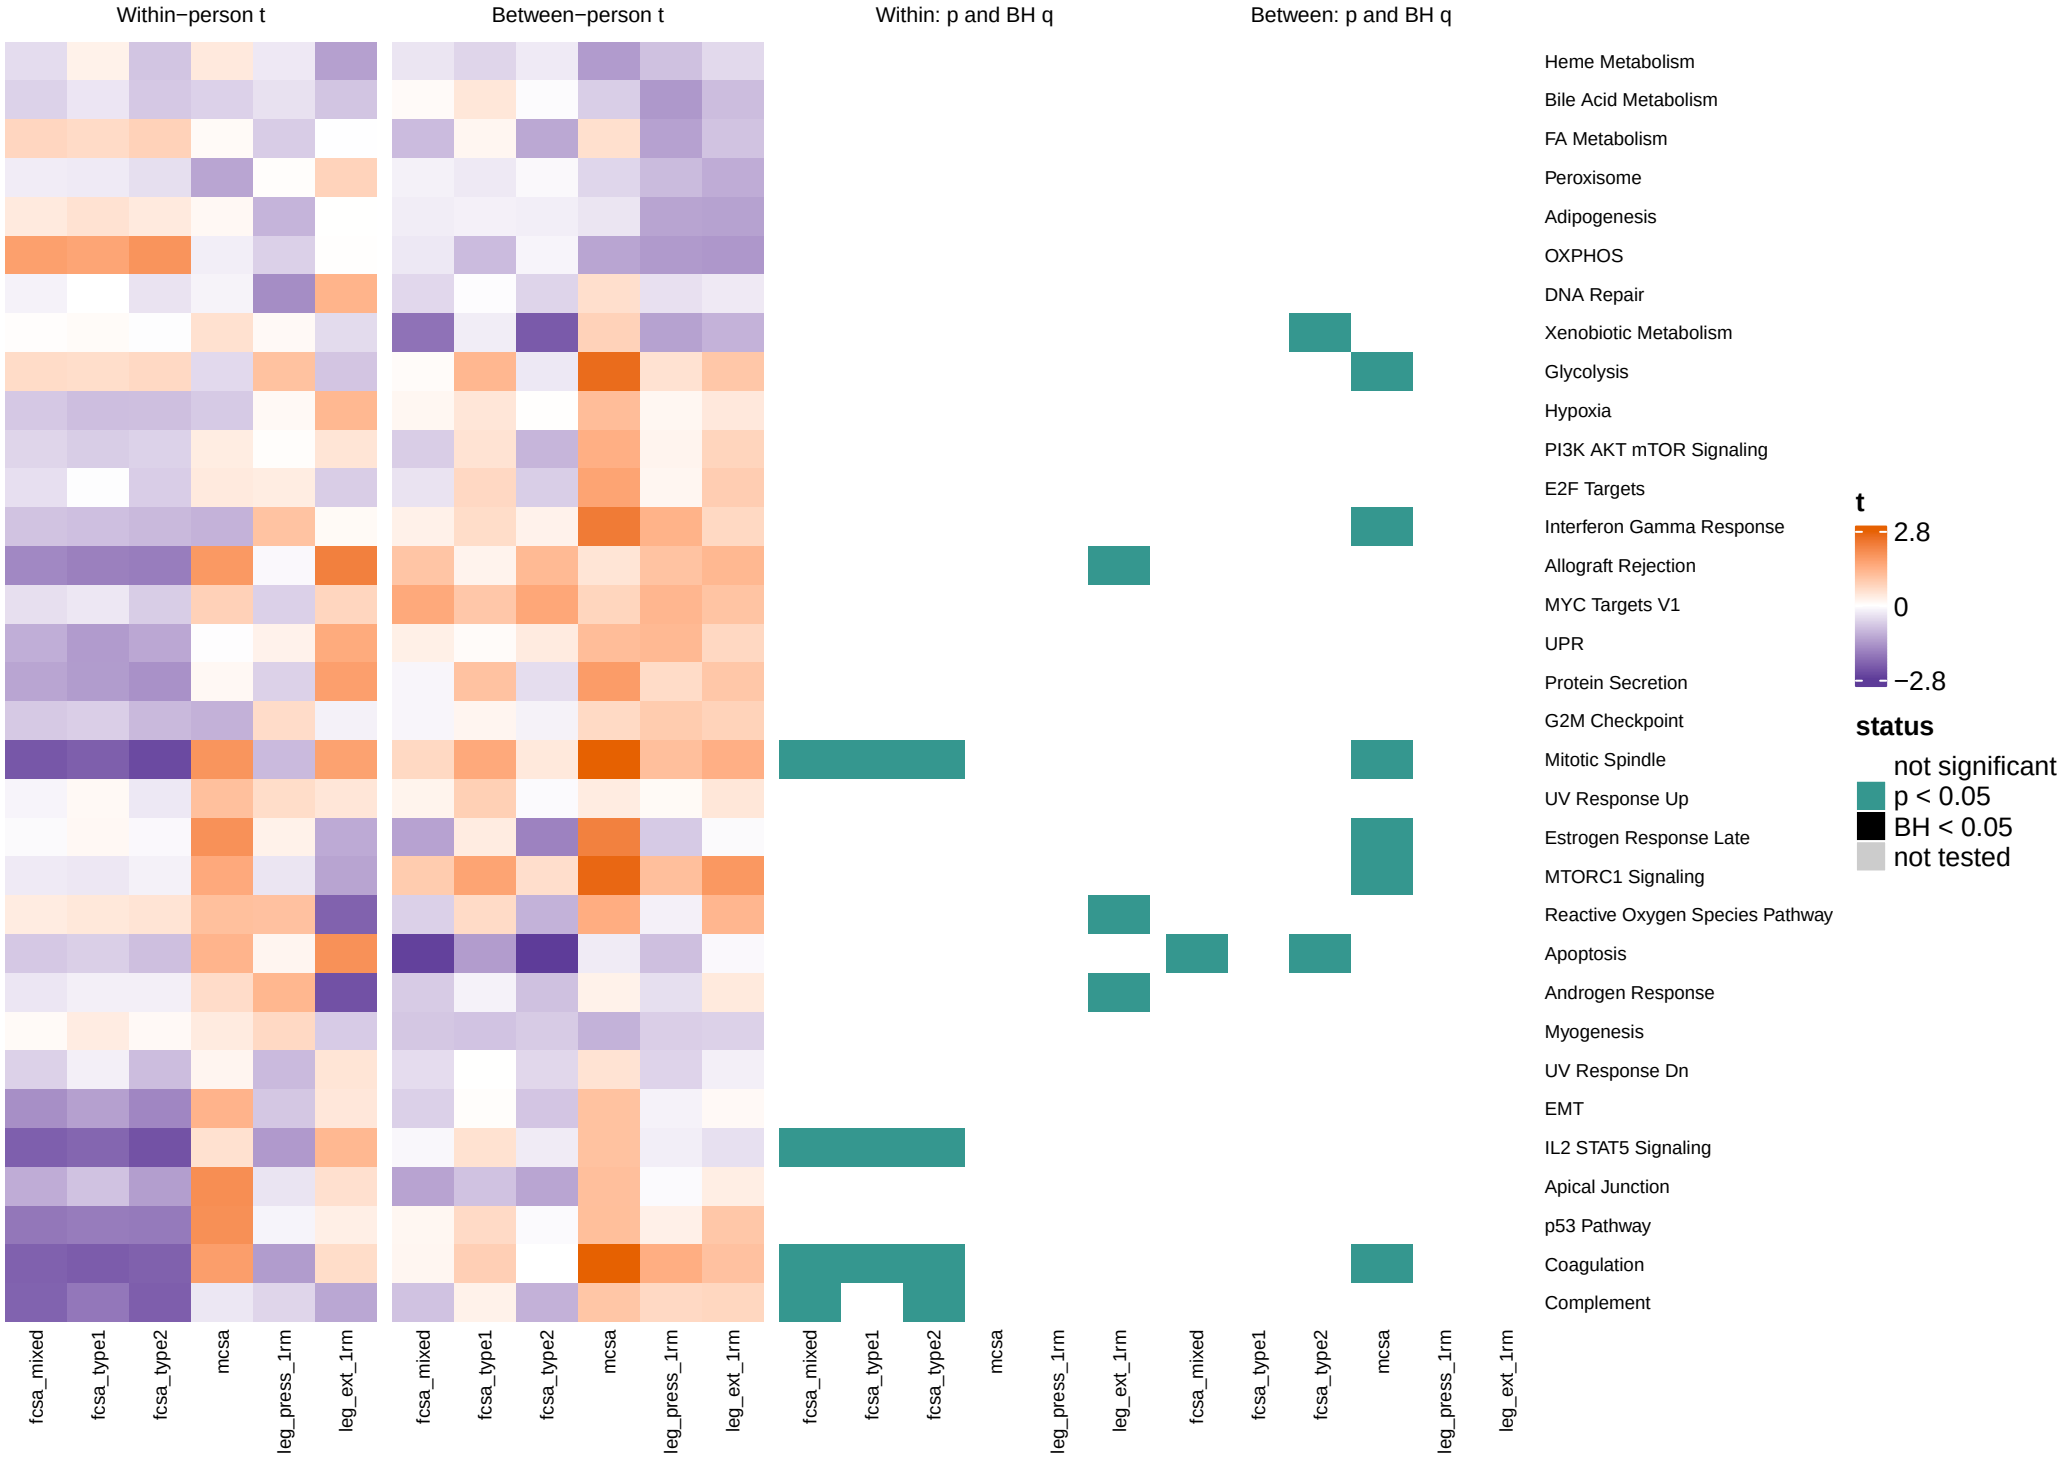



All 33 sets, one row each. Moderated t of the within and between terms, abundance ~ timepoint + between + within, subject blocked. Colours stop at the 99th percentile of |t|, 2.8. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/04_associate.xlsx, model.

# Change score overview, training window: Hallmark

Spearman rho, both arms pooled

p and BH q

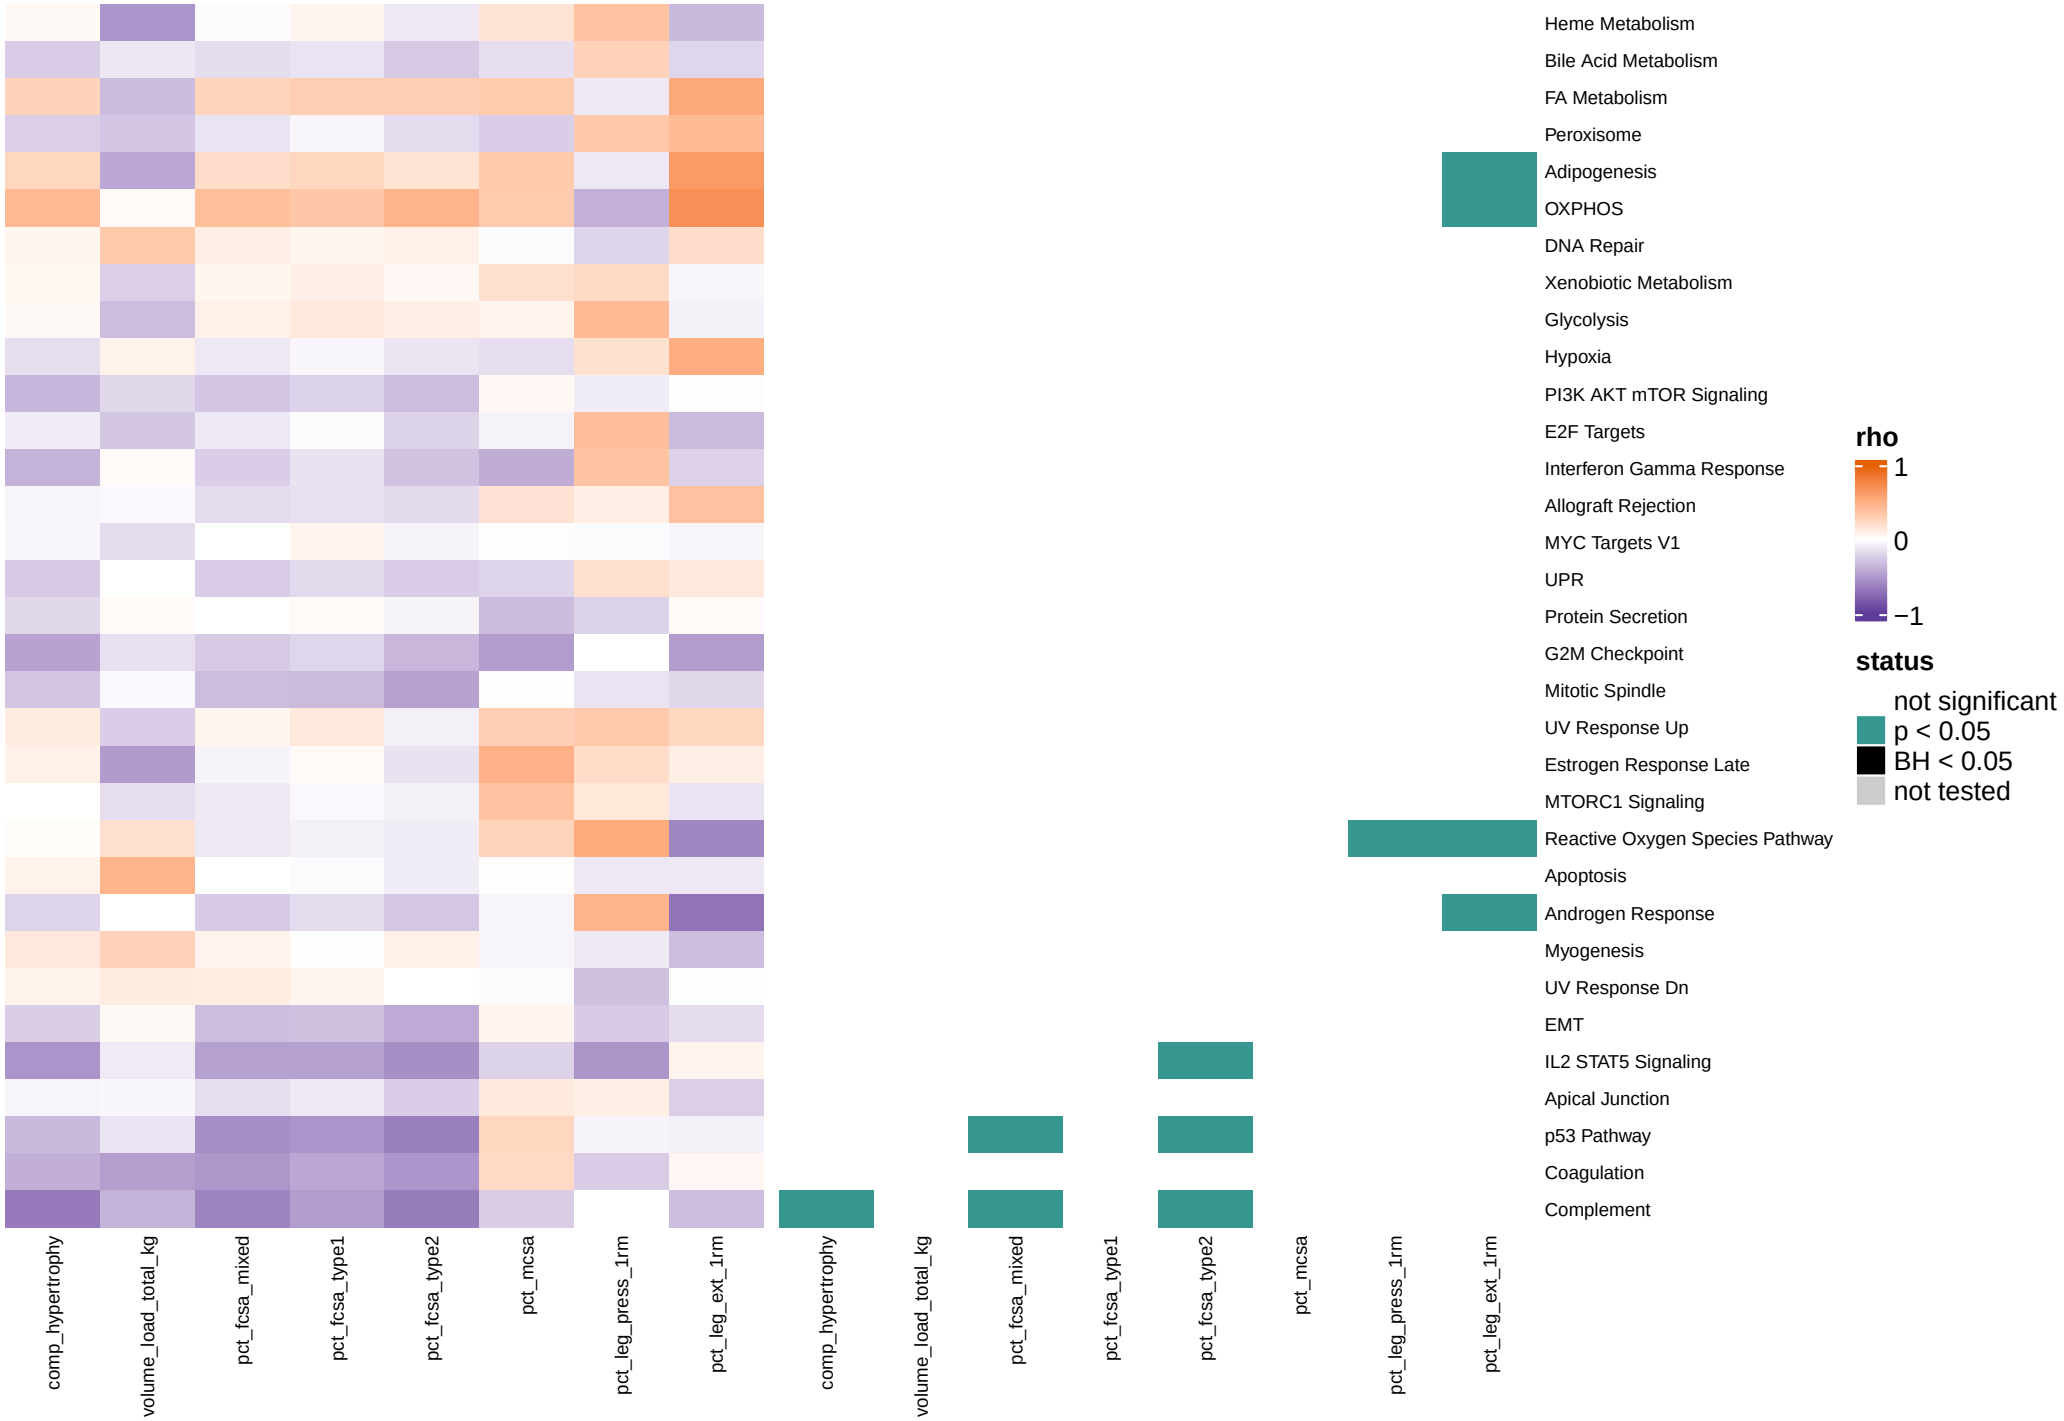



All 33 sets, one row each. Spearman rho between the singscore (change, T1 to T2) and each outcome. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/04_associate.xlsx, change_score.

# Change score overview, baseline window: Hallmark


Spearman rho, both arms pooled

p and BH q

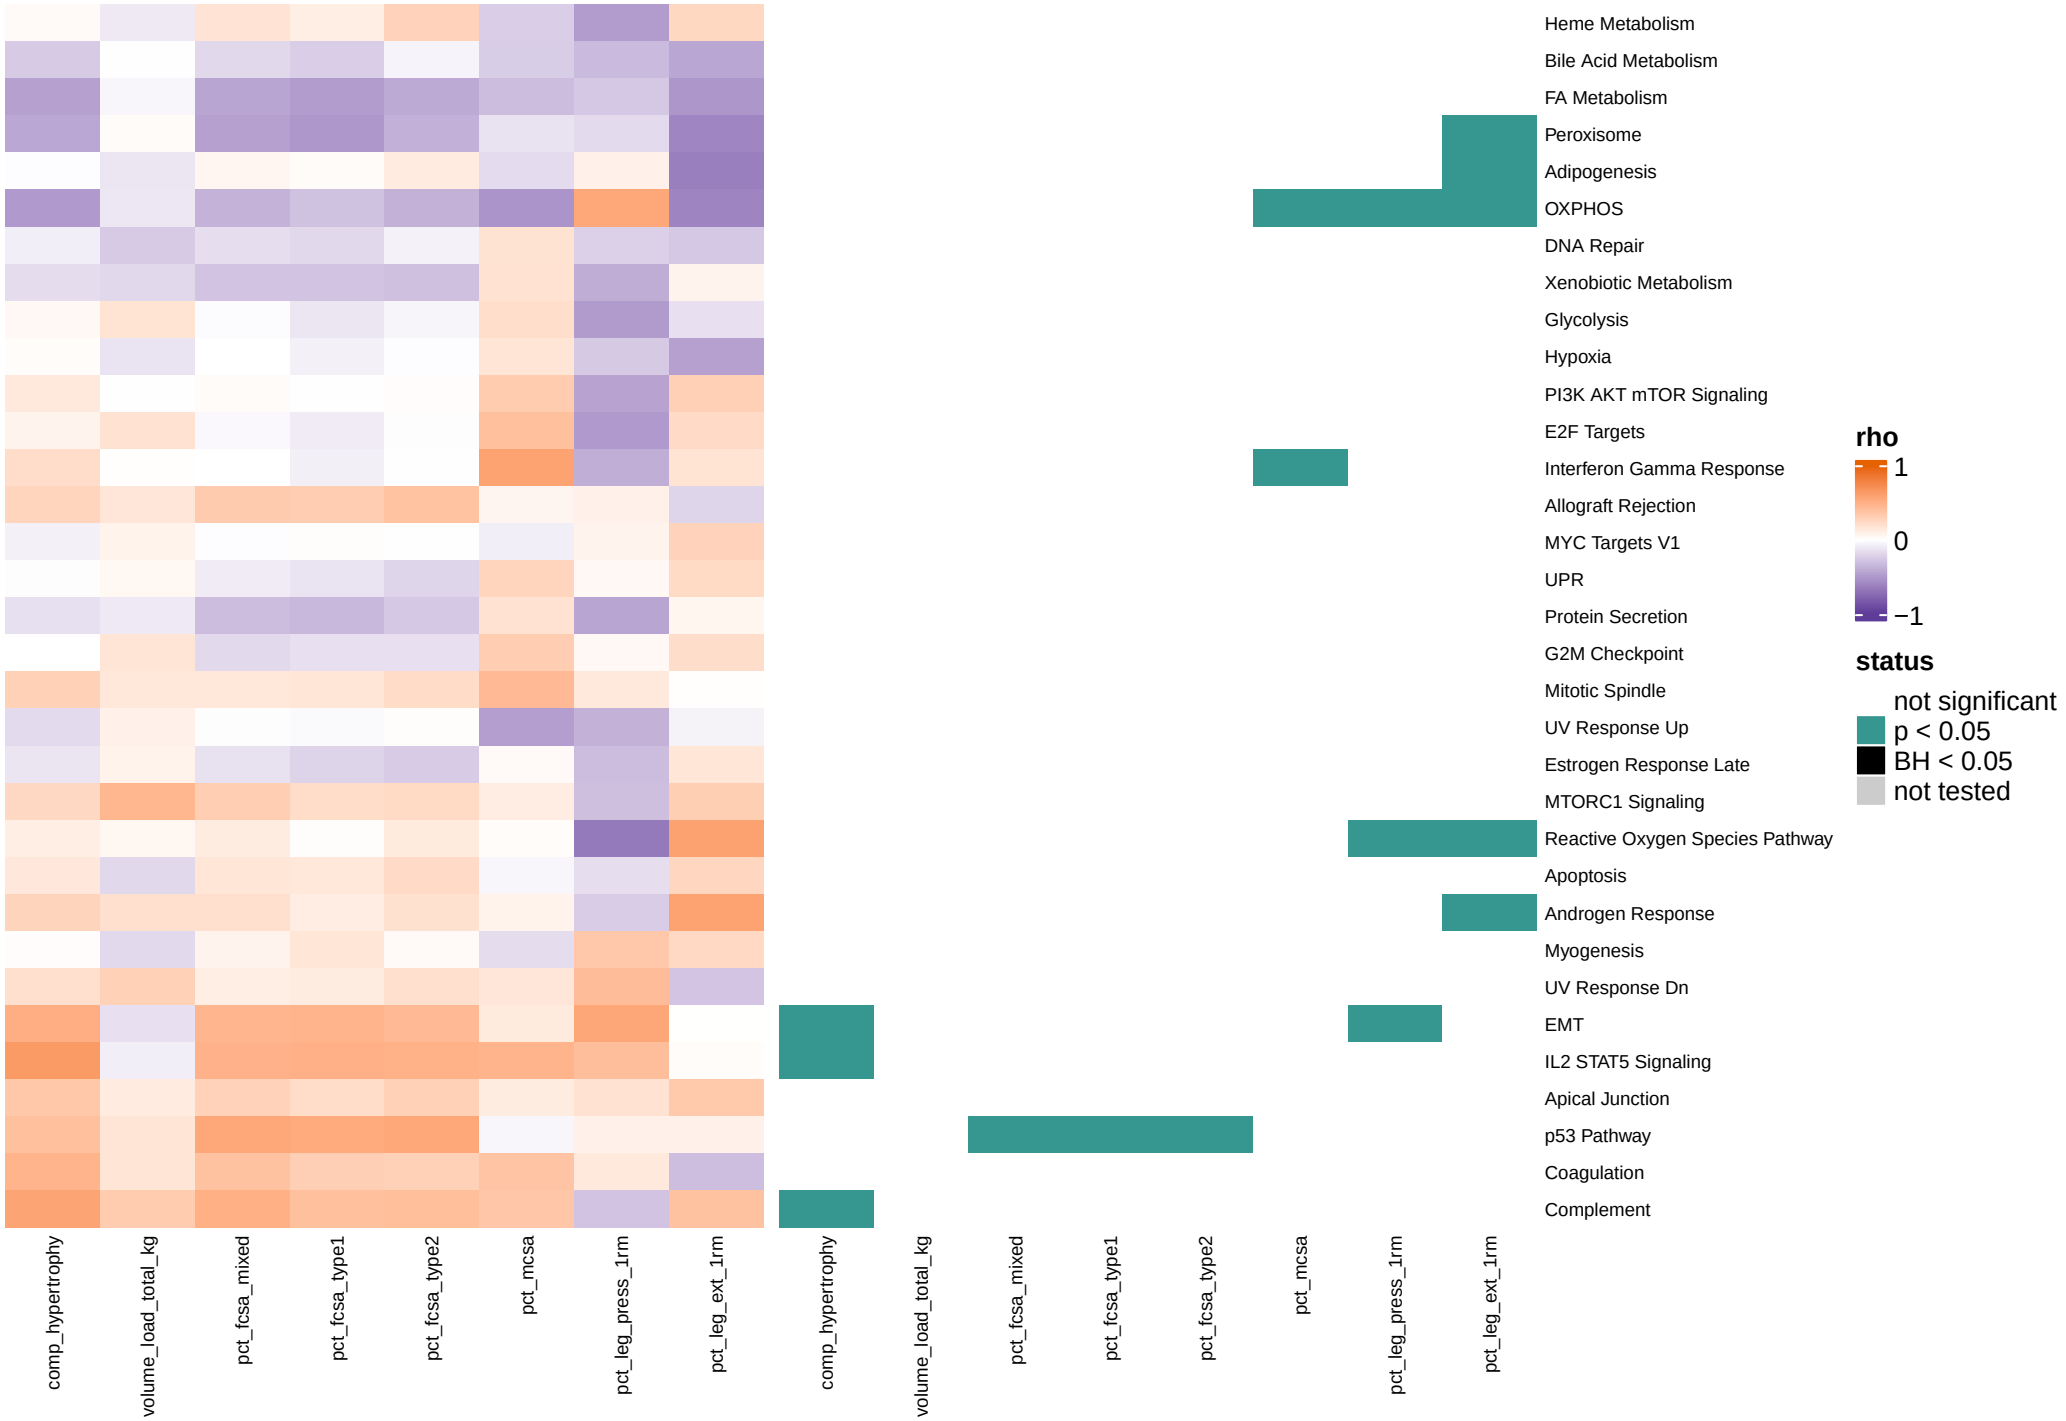



All 33 sets, one row each. Spearman rho between the singscore (T1 level) and each outcome. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/04_associate.xlsx, change_score.

# Change score overview, acute window: Hallmark

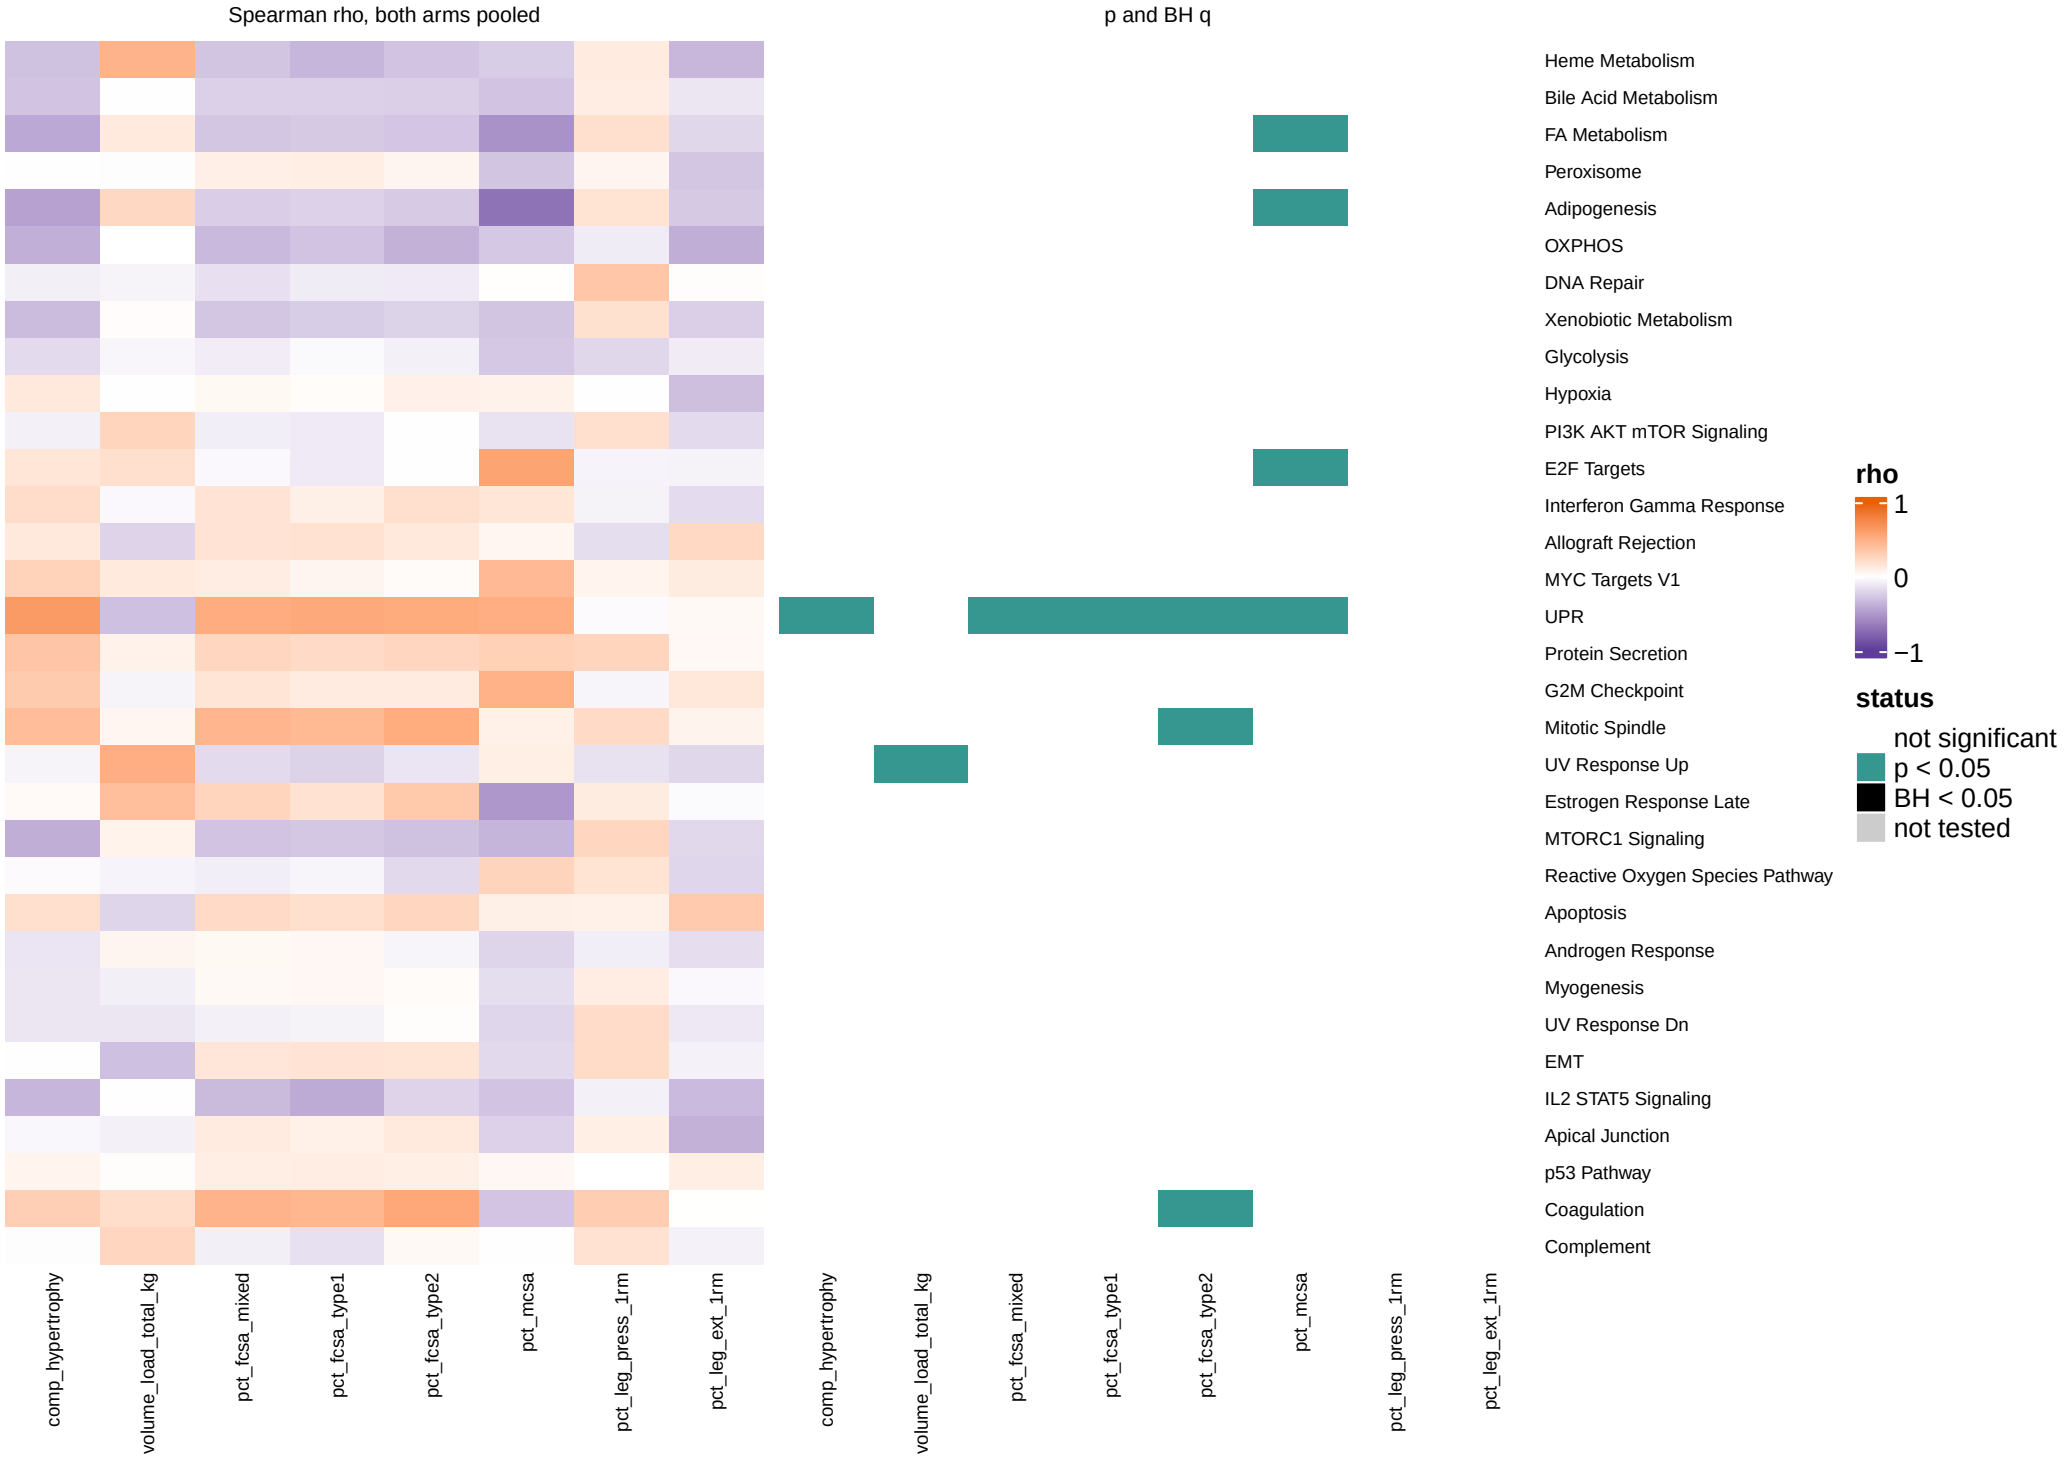



All 33 sets, one row each. Spearman rho between the singscore (change, T2 to T3) and each outcome. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/04_associate.xlsx, change_score.

# Sample model overview: Reactome

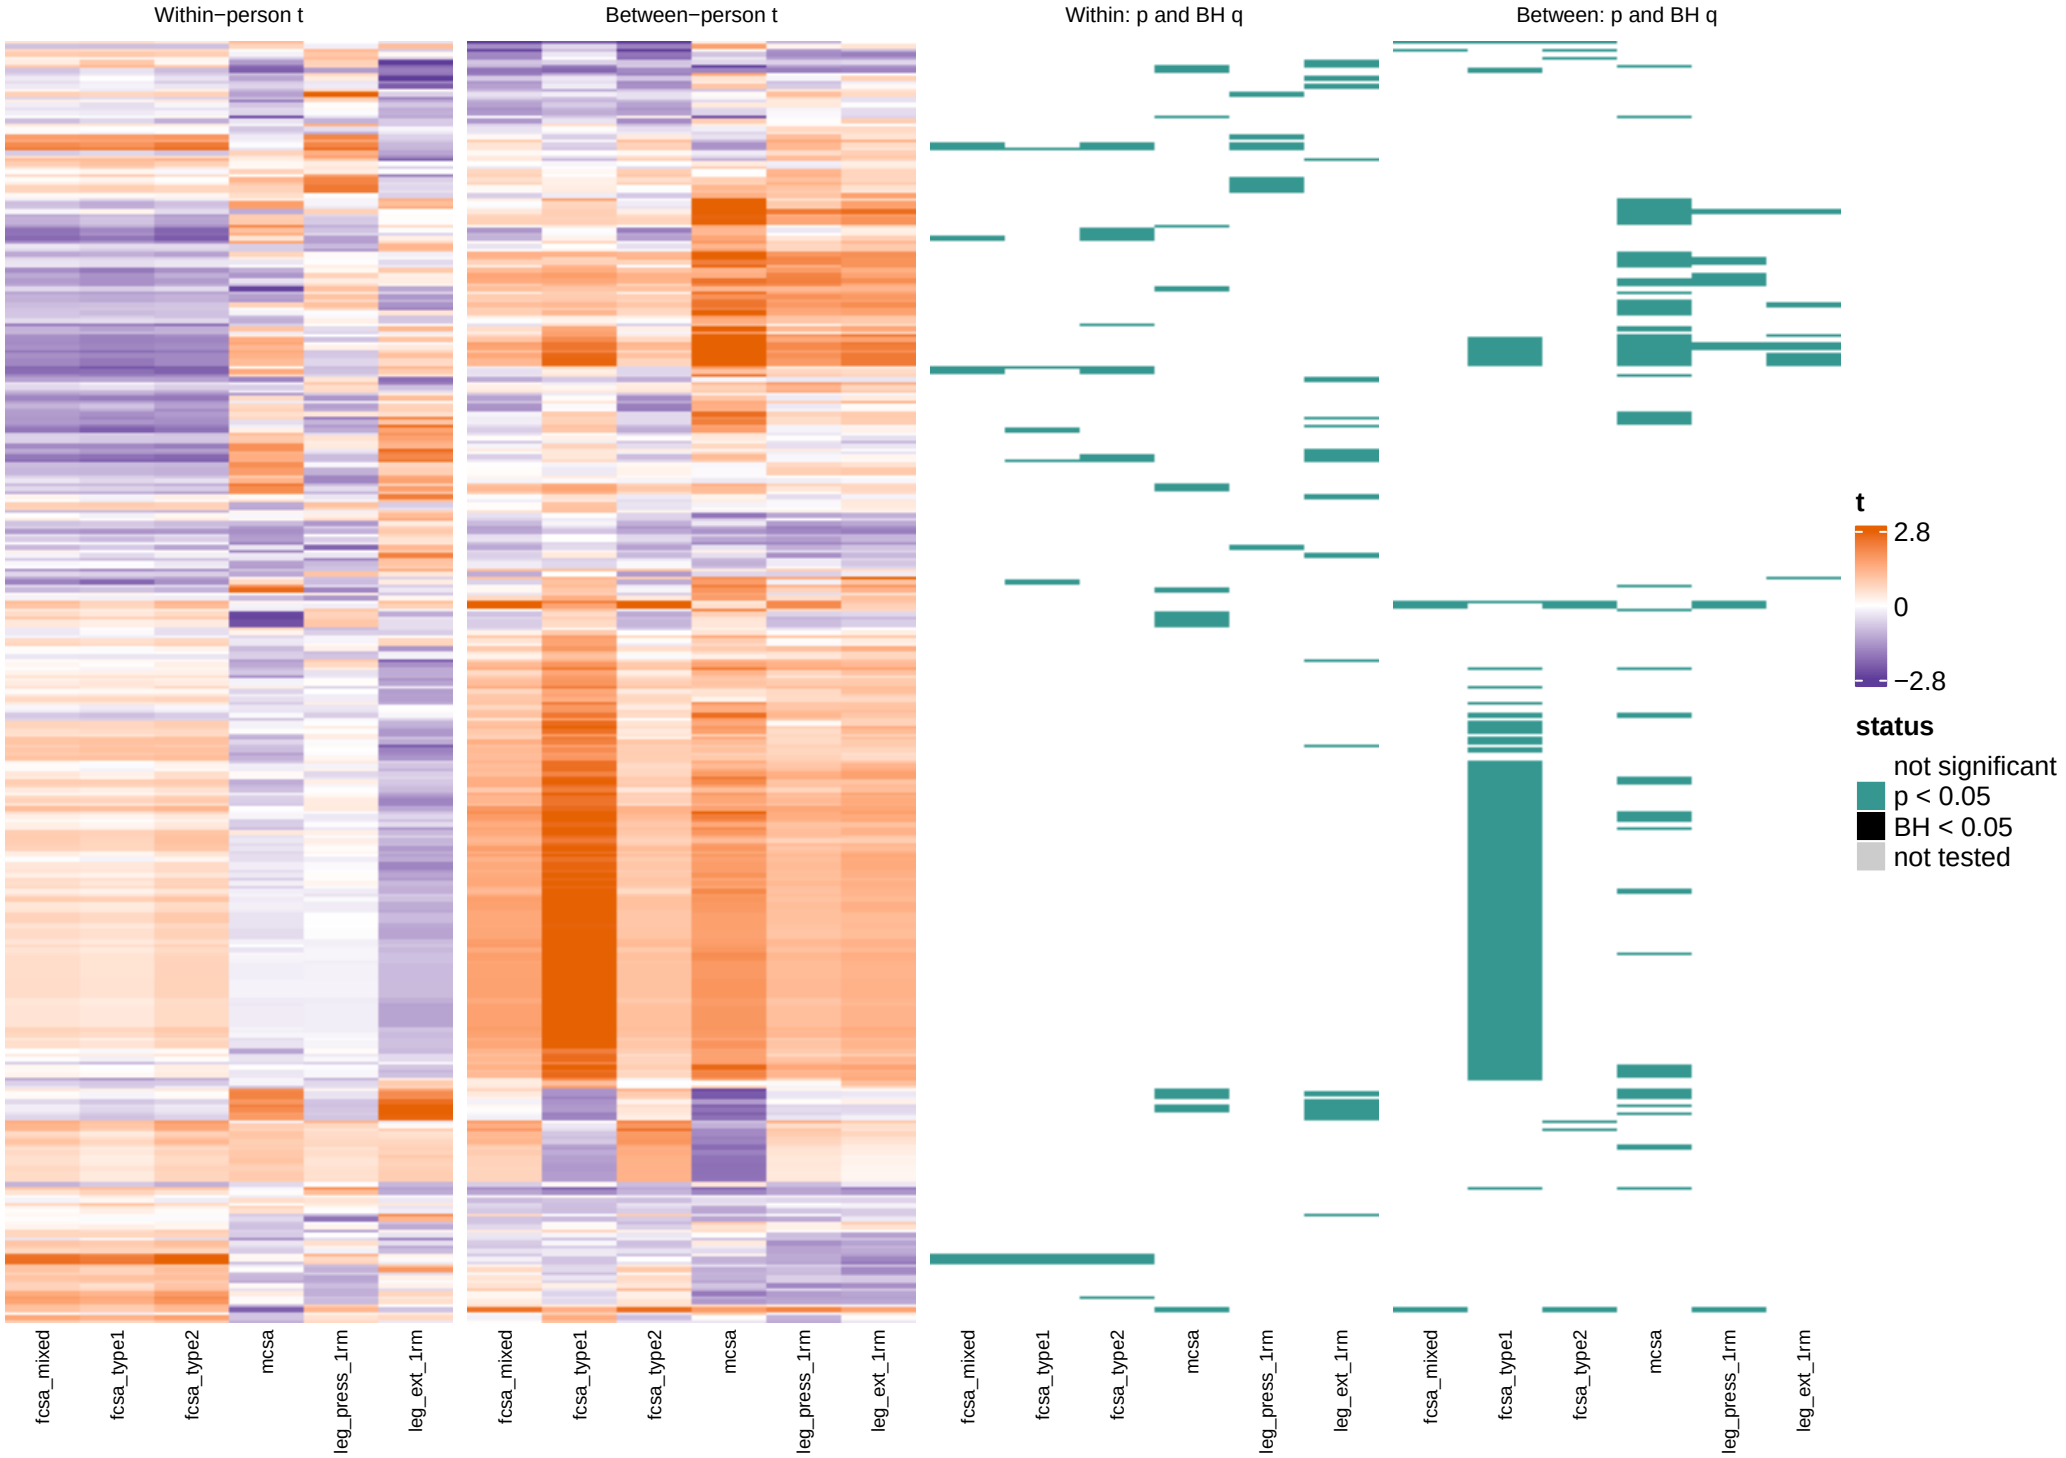



All 328 sets, one row each. Moderated t of the within and between terms, abundance ~ timepoint + between + within, subject blocked. Colours stop at the 99th percentile of |t|, 2.8. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/04_associate.xlsx, model.

# Change score overview, training window: Reactome

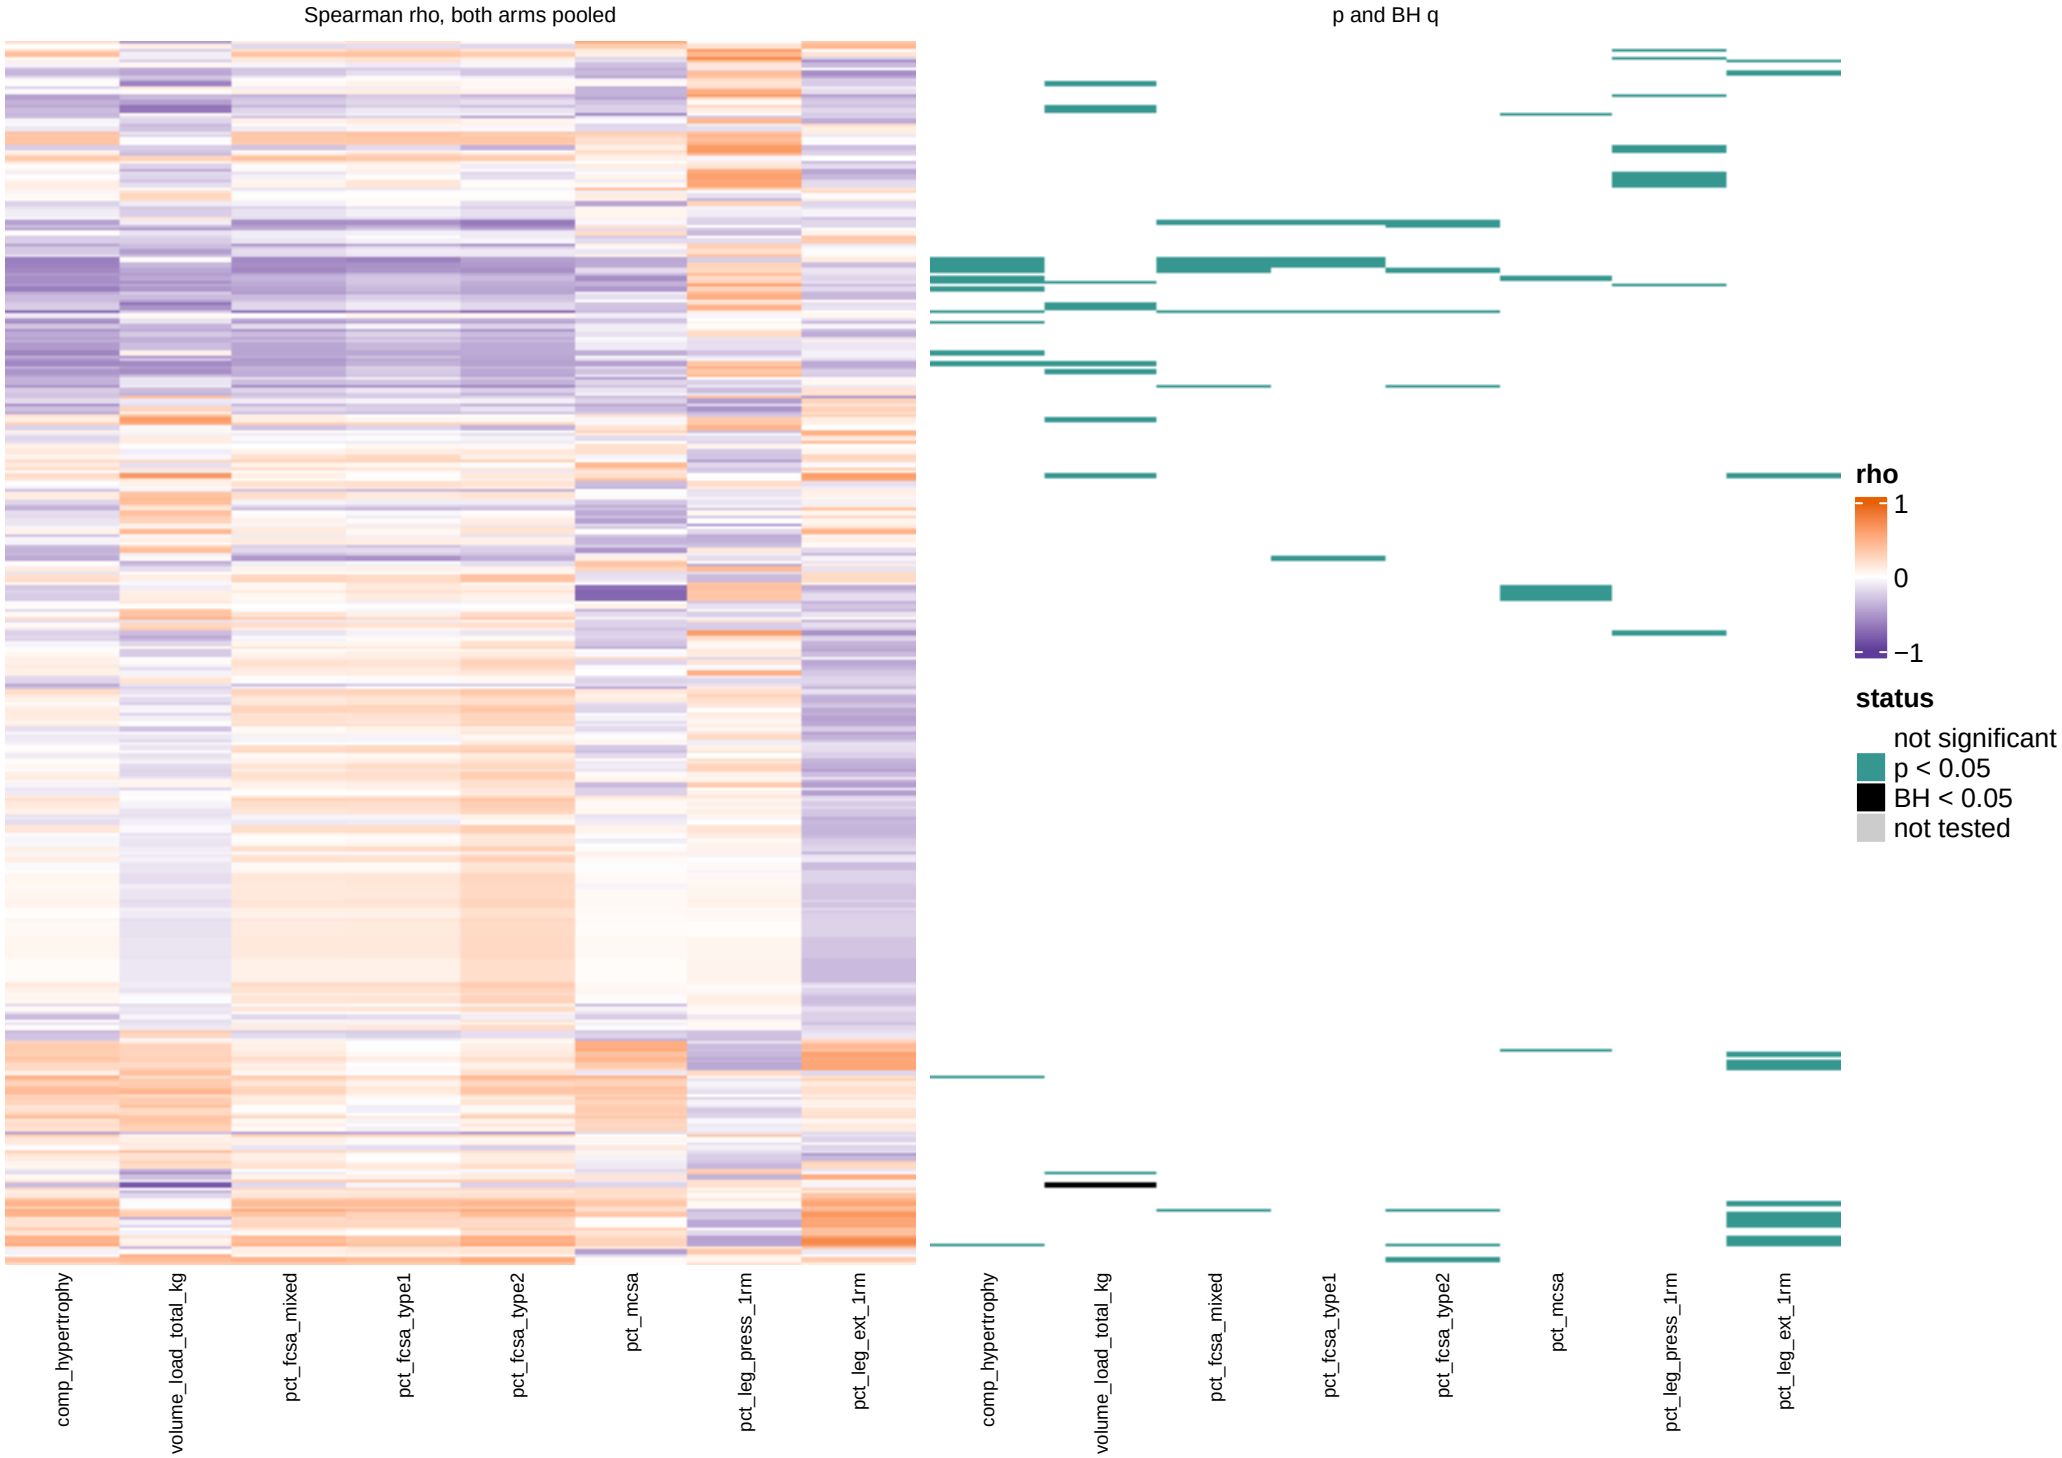


All 328 sets, one row each. Spearman rho between the singscore (change, T1 to T2) and each outcome. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/04_associate.xlsx, change_score.

# Change score overview, baseline window: Reactome

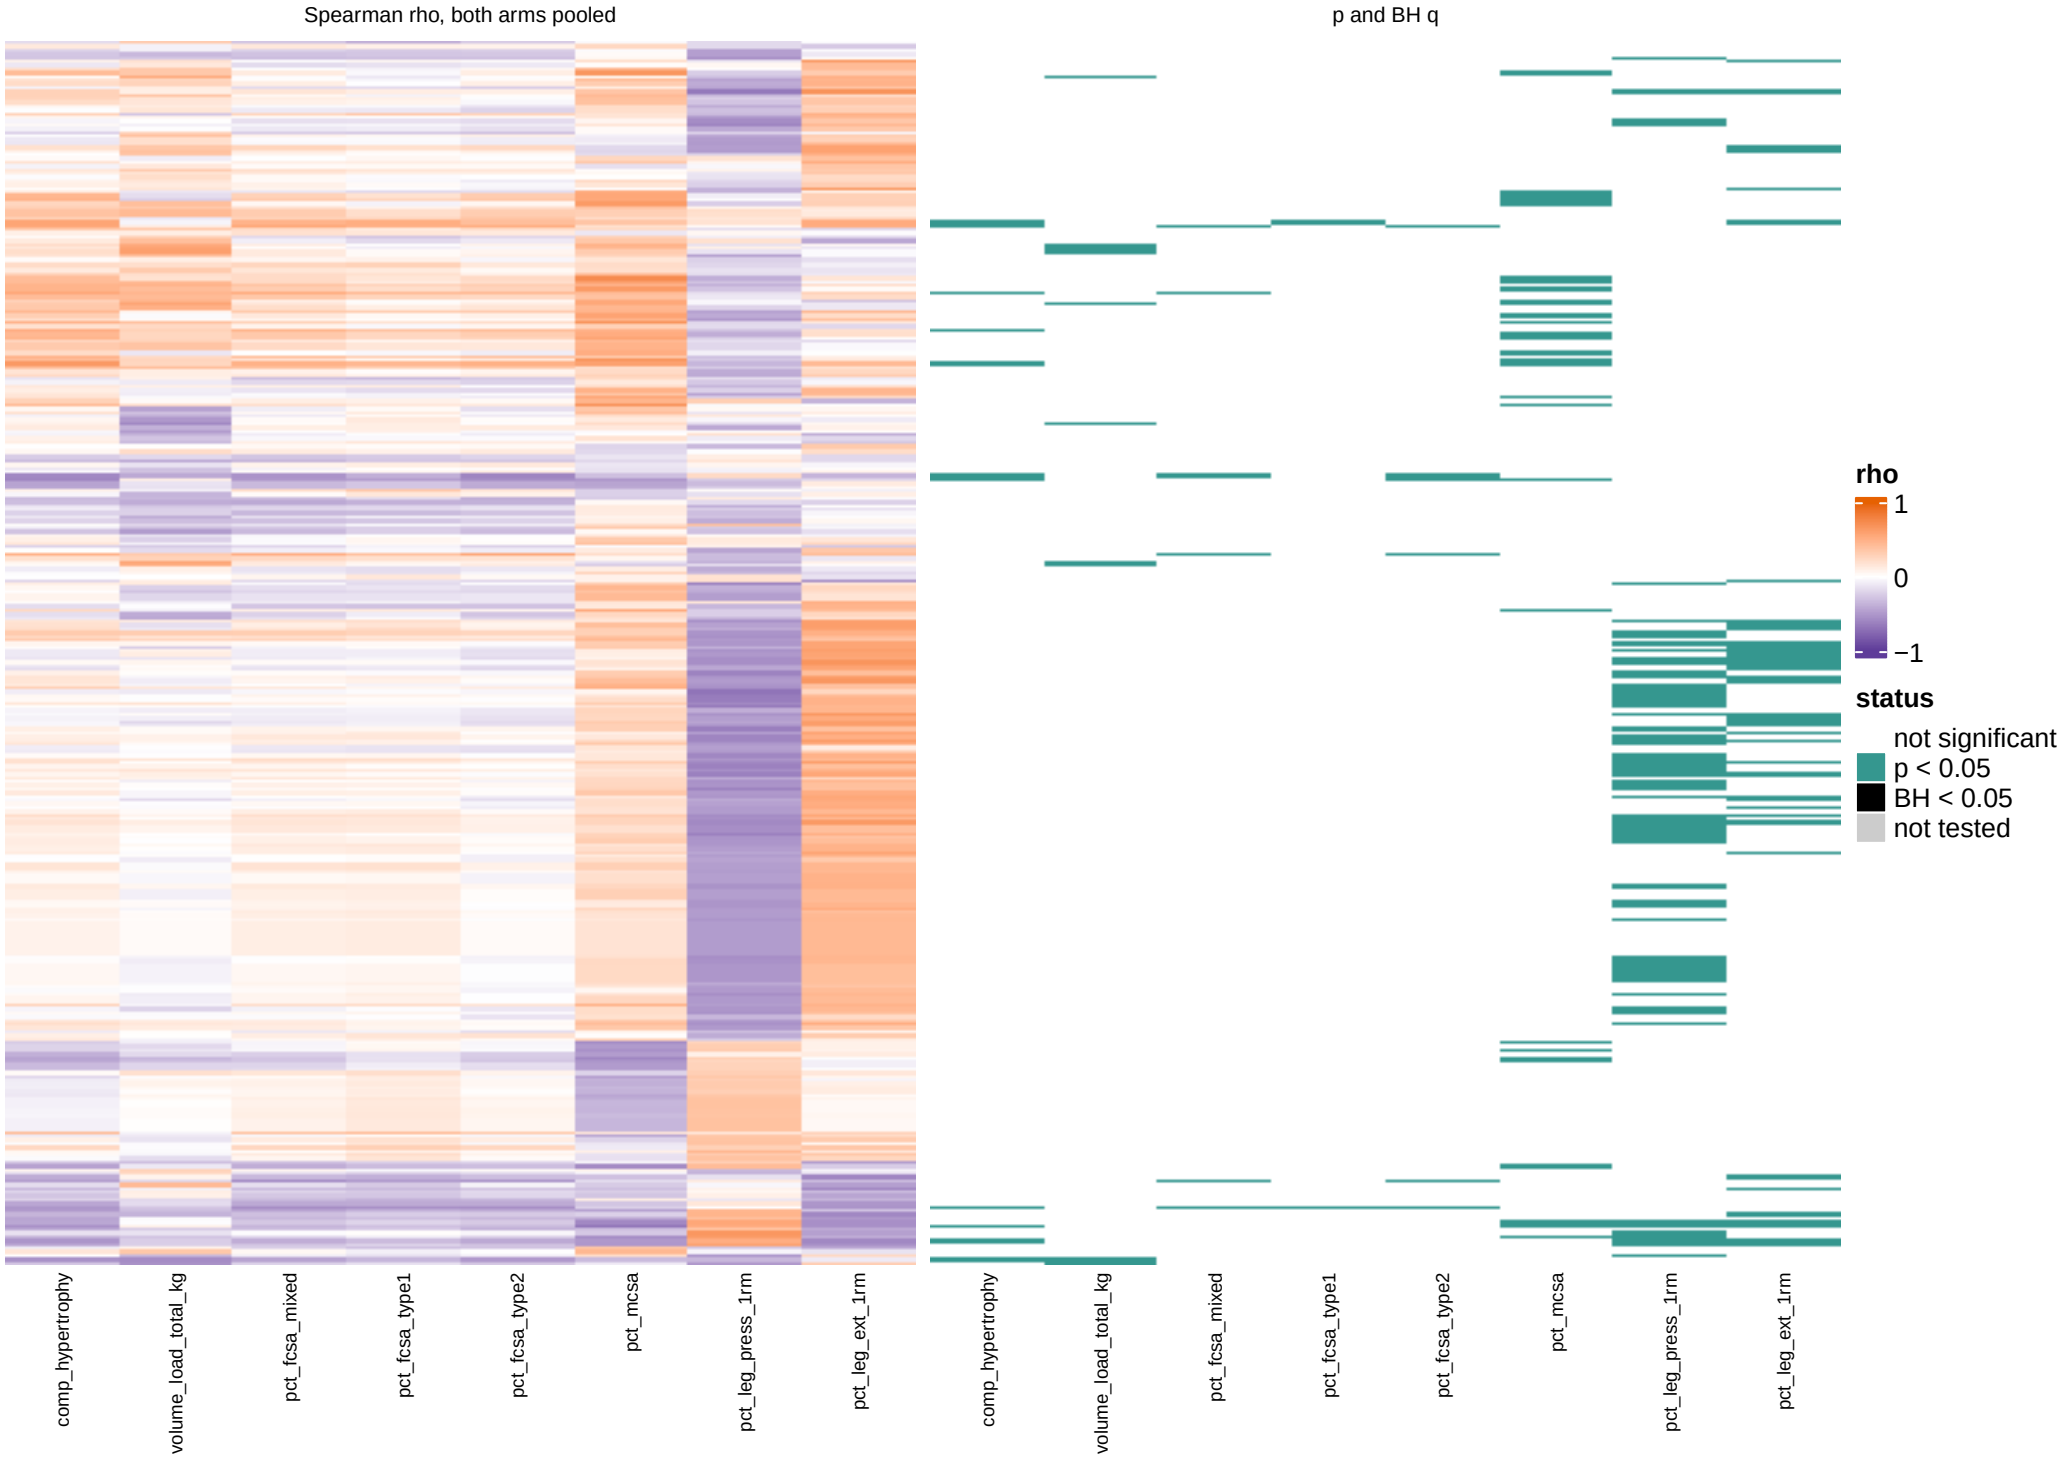



All 328 sets, one row each. Spearman rho between the singscore (T1 level) and each outcome. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/04_associate.xlsx, change_score.

# Change score overview, acute window: Reactome





All 328 sets, one row each. Spearman rho between the singscore (change, T2 to T3) and each outcome. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/04_associate.xlsx, change_score.

# Sample model overview: KEGG_Legacy

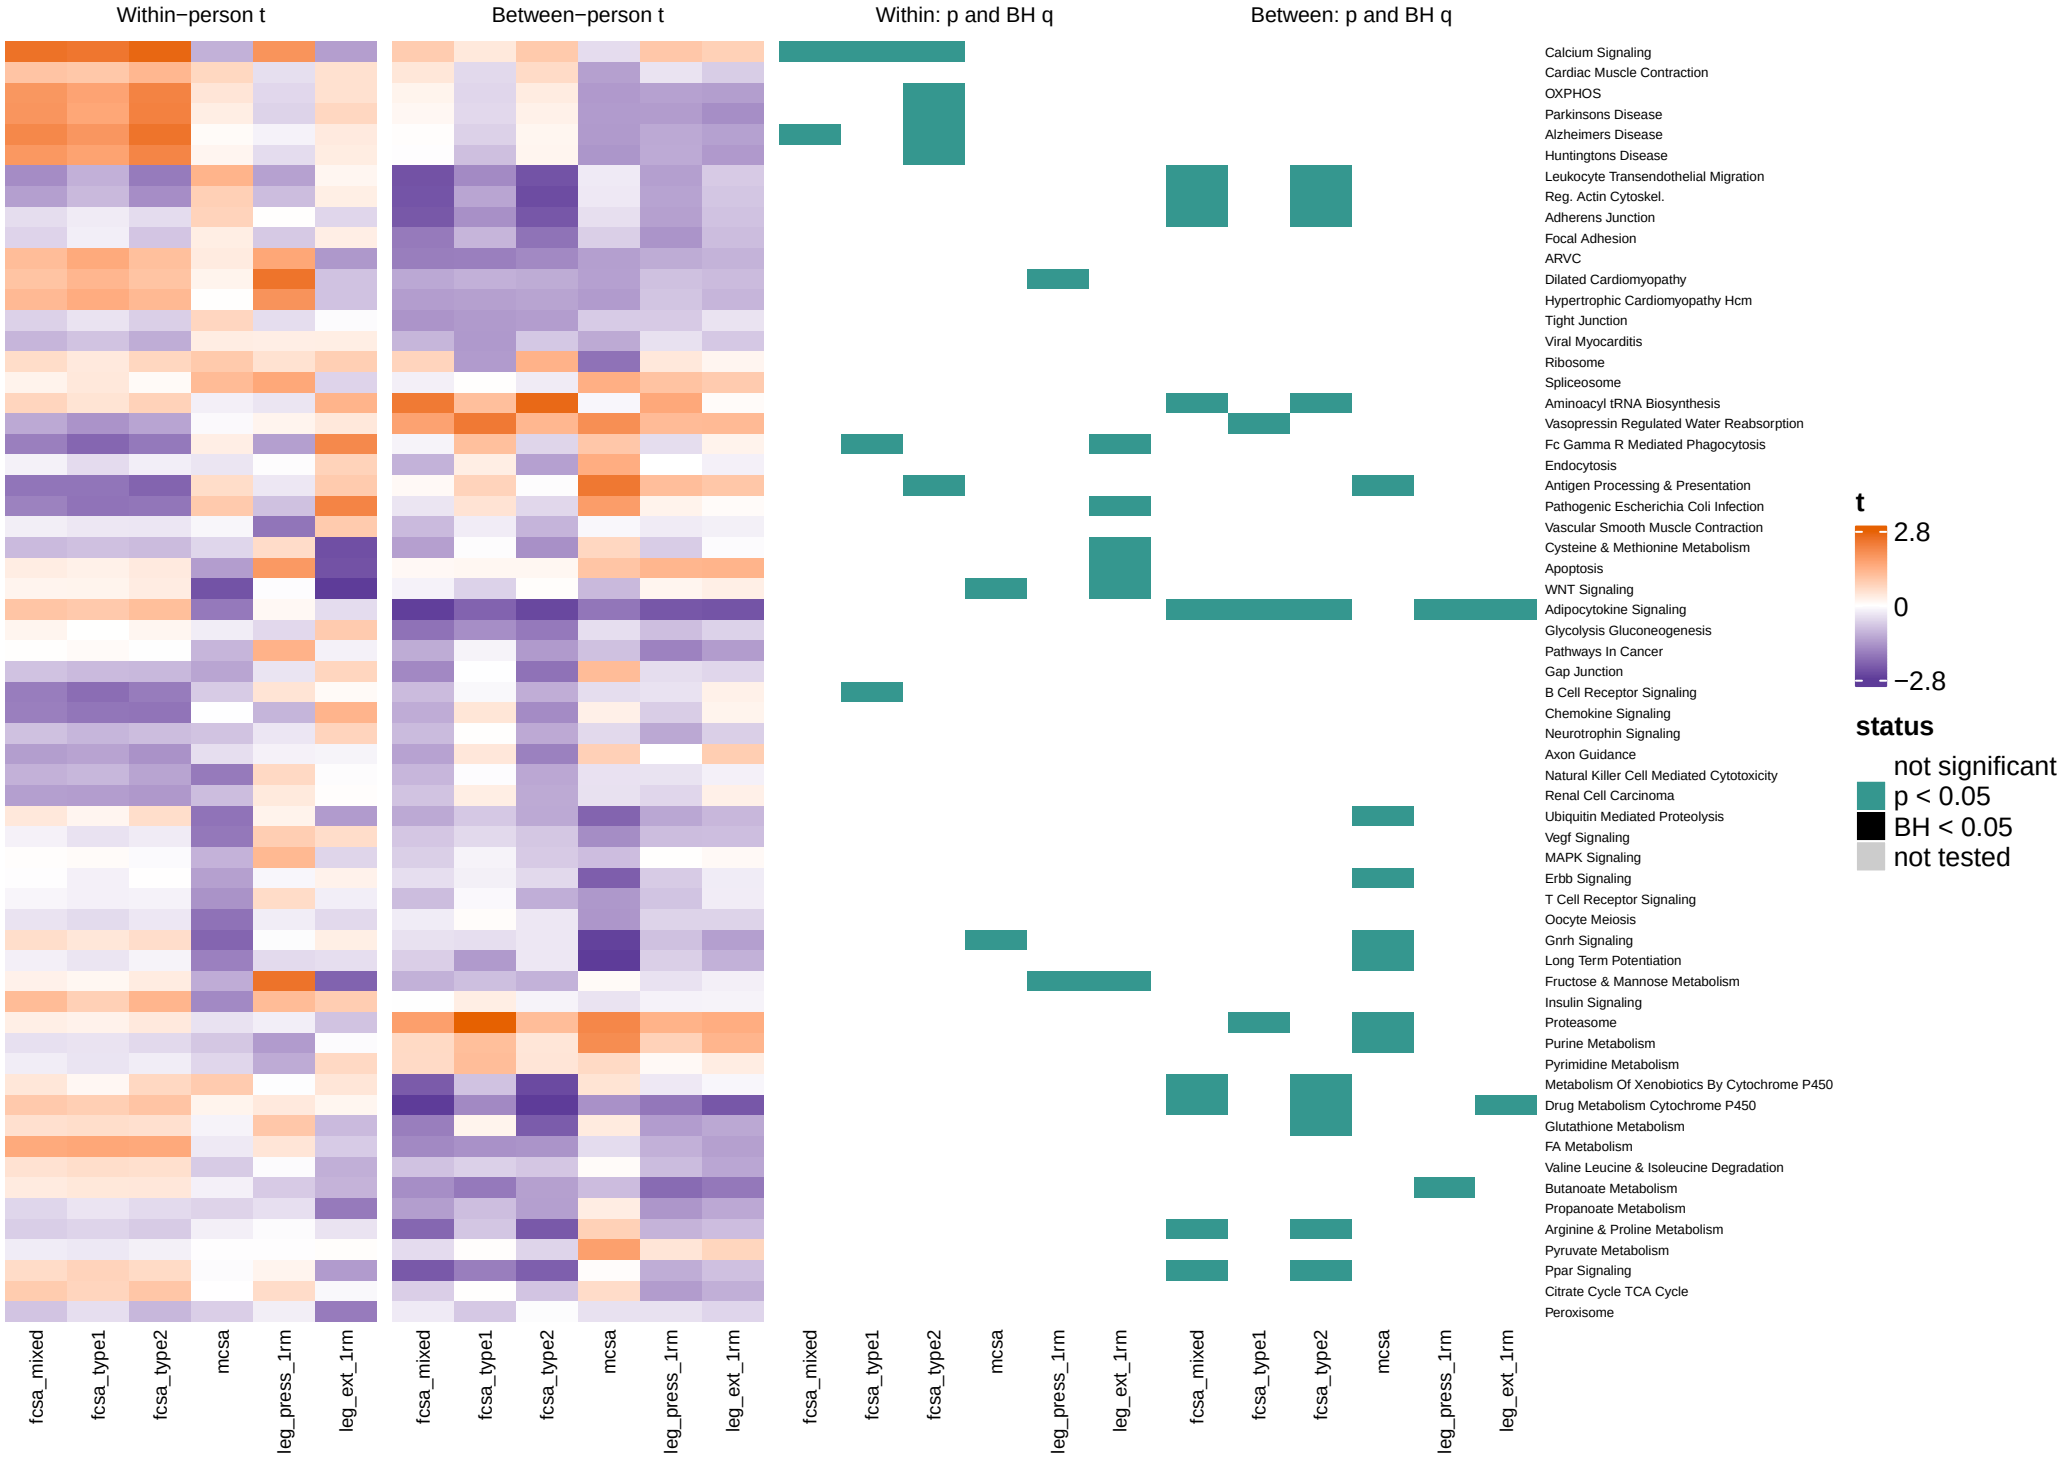



All 62 sets, one row each. Moderated t of the within and between terms, abundance ~ timepoint + between + within, subject blocked. Colours stop at the 99th percentile of |t|, 2.8. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/04_associate.xlsx, model.

# Change score overview, training window: KEGG_Legacy

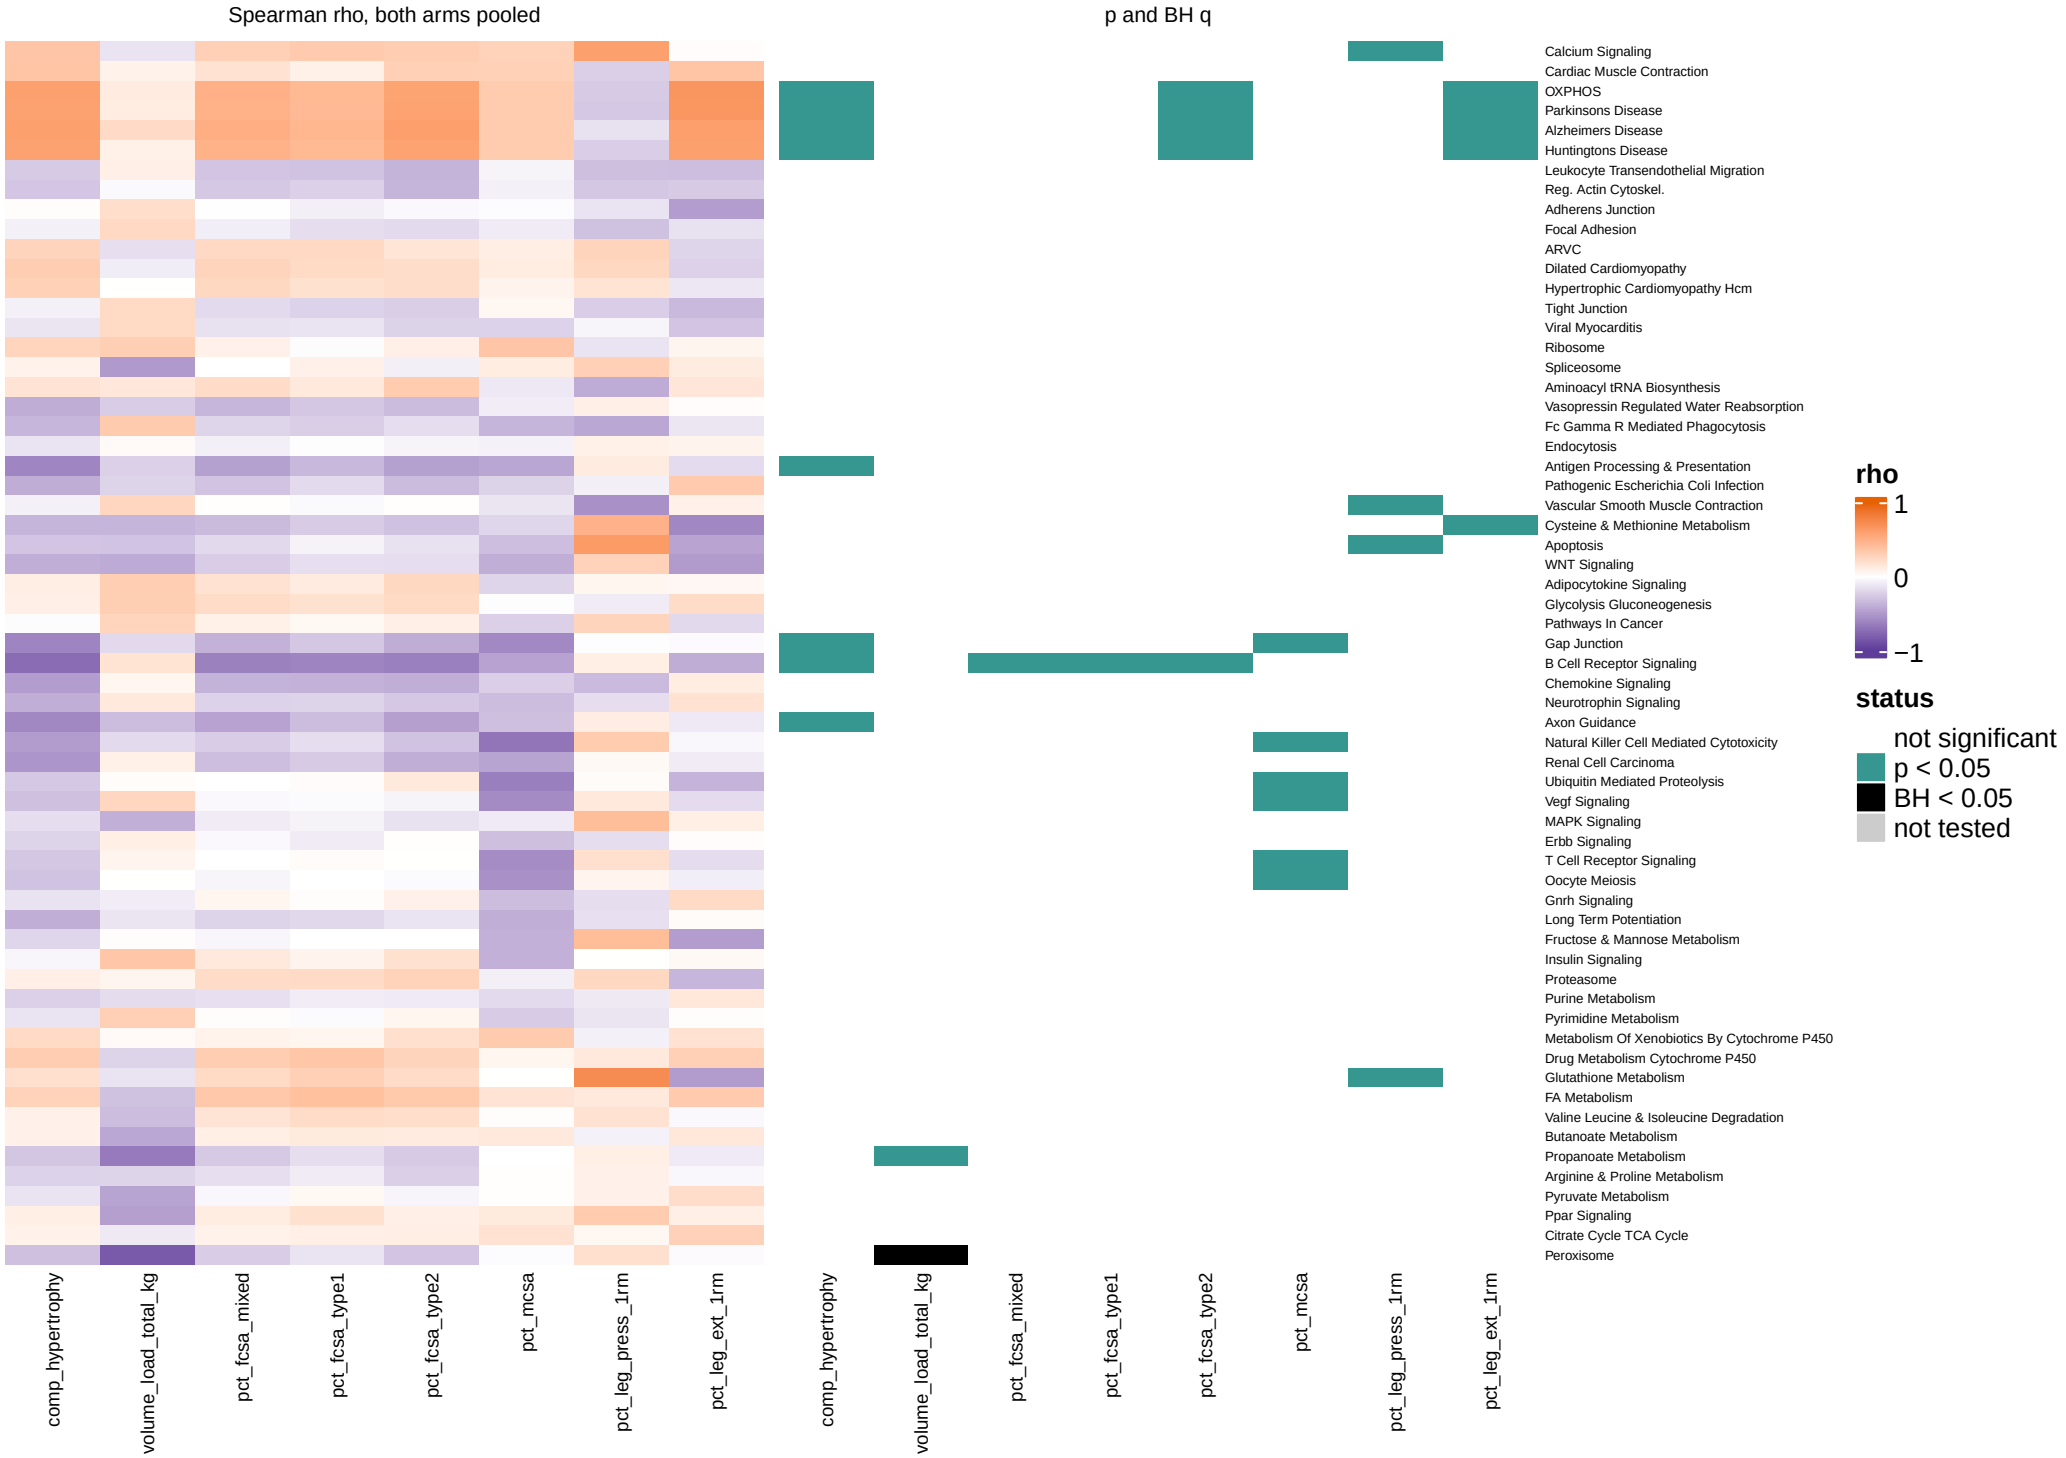



All 62 sets, one row each. Spearman rho between the singscore (change, T1 to T2) and each outcome. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/04_associate.xlsx, change_score.

# Change score overview, baseline window: KEGG_Legacy

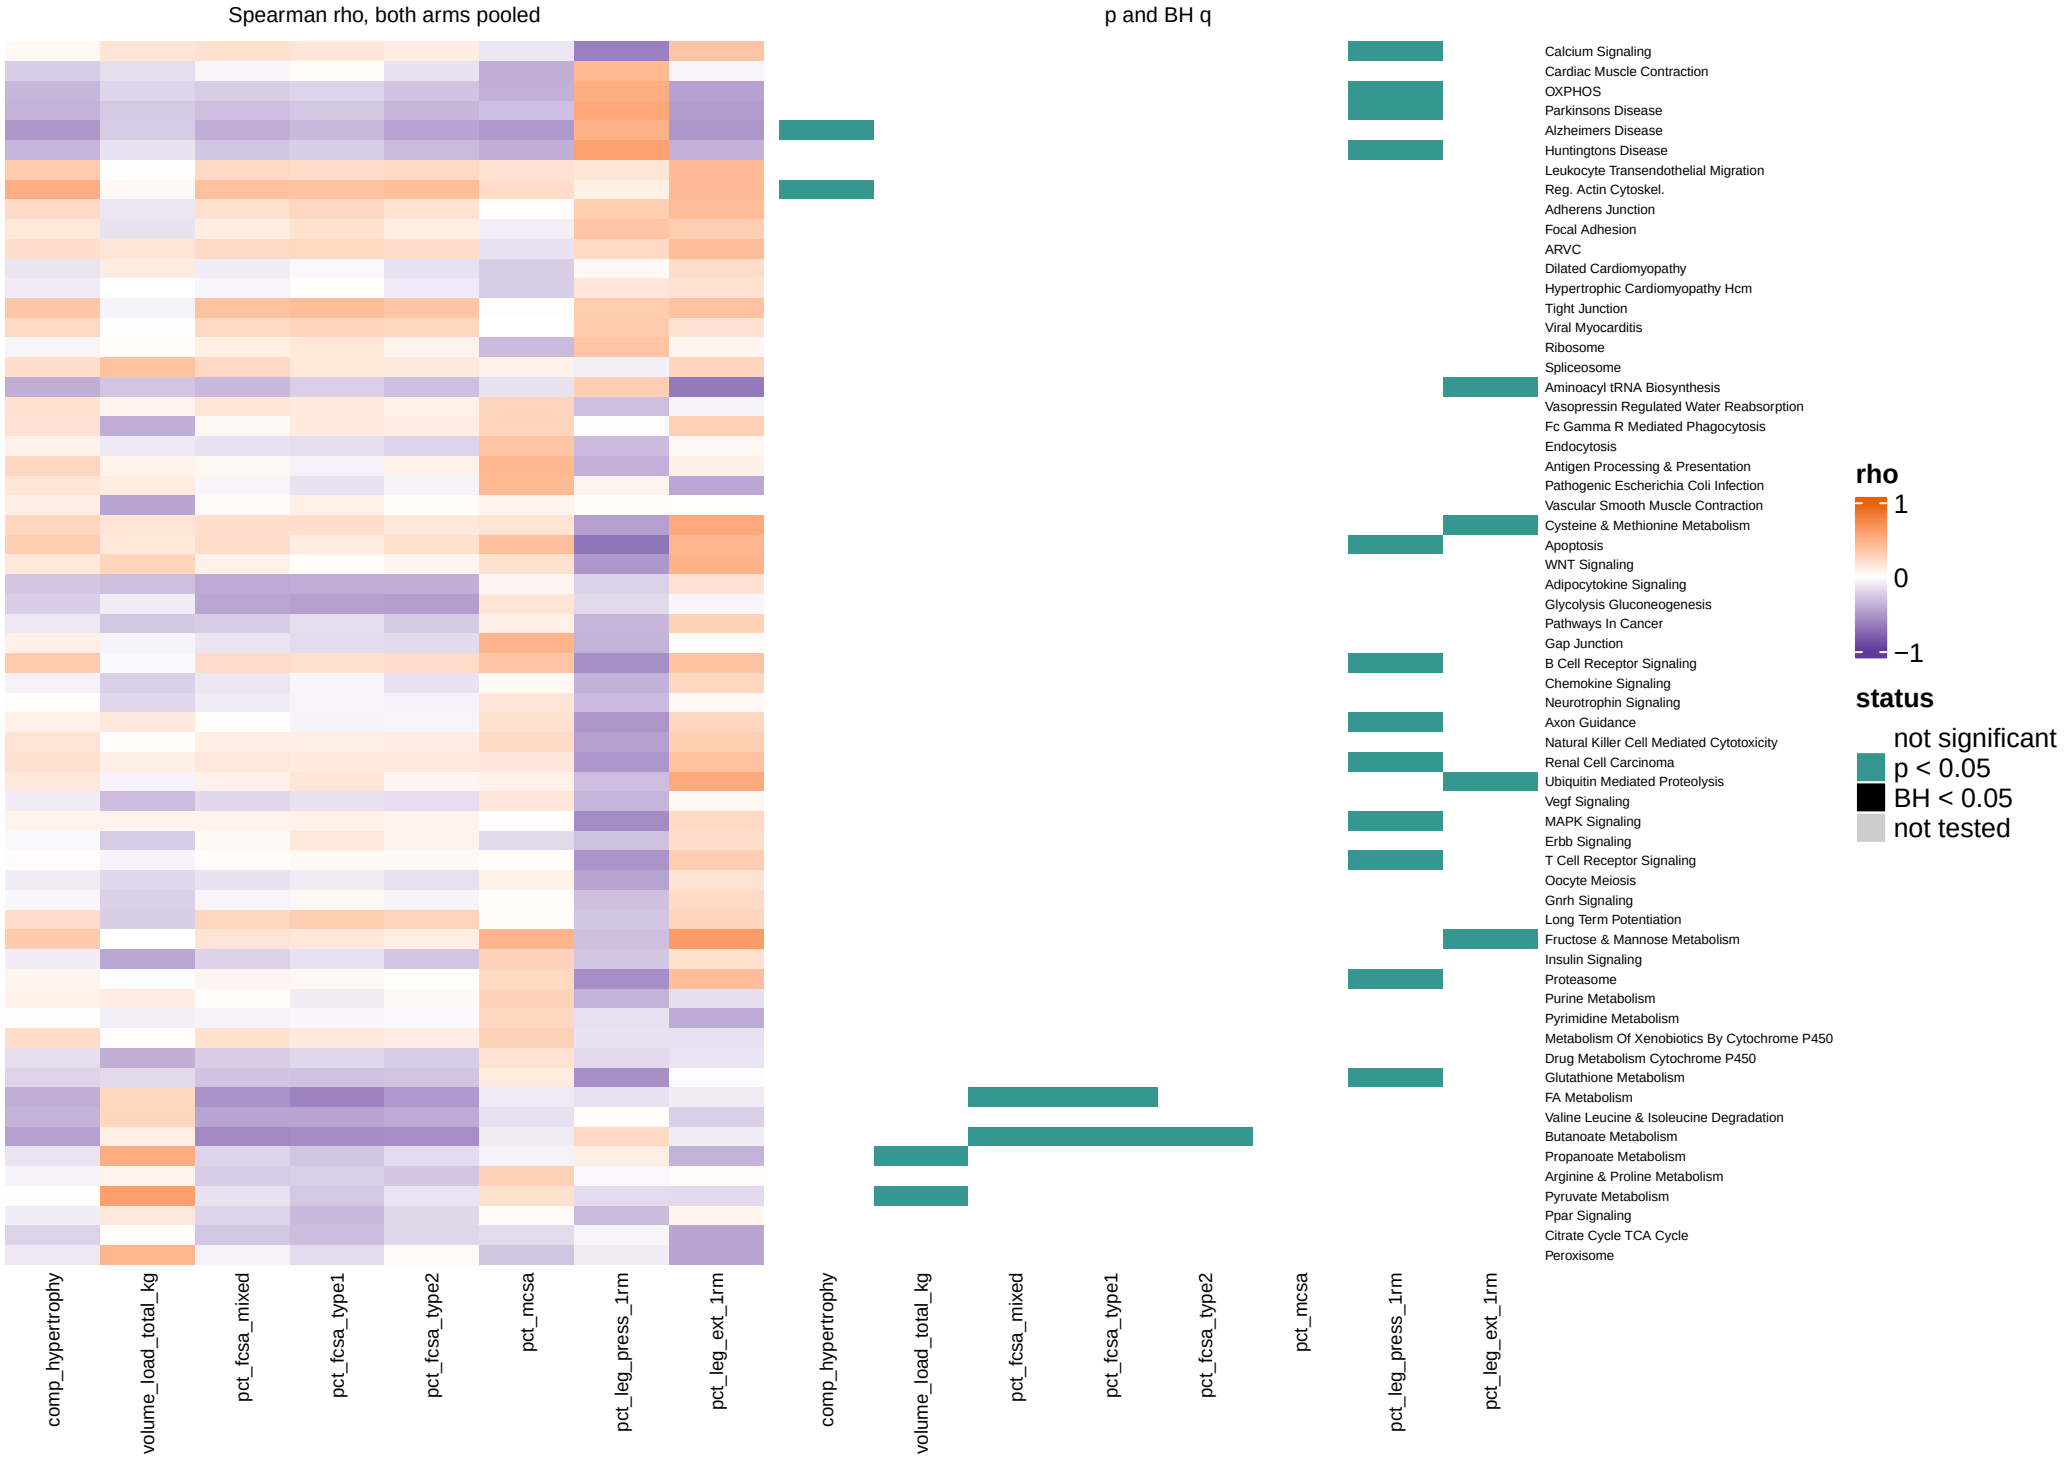



All 62 sets, one row each. Spearman rho between the singscore (T1 level) and each outcome. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/04_associate.xlsx, change_score.

# Change score overview, acute window: KEGG_Legacy

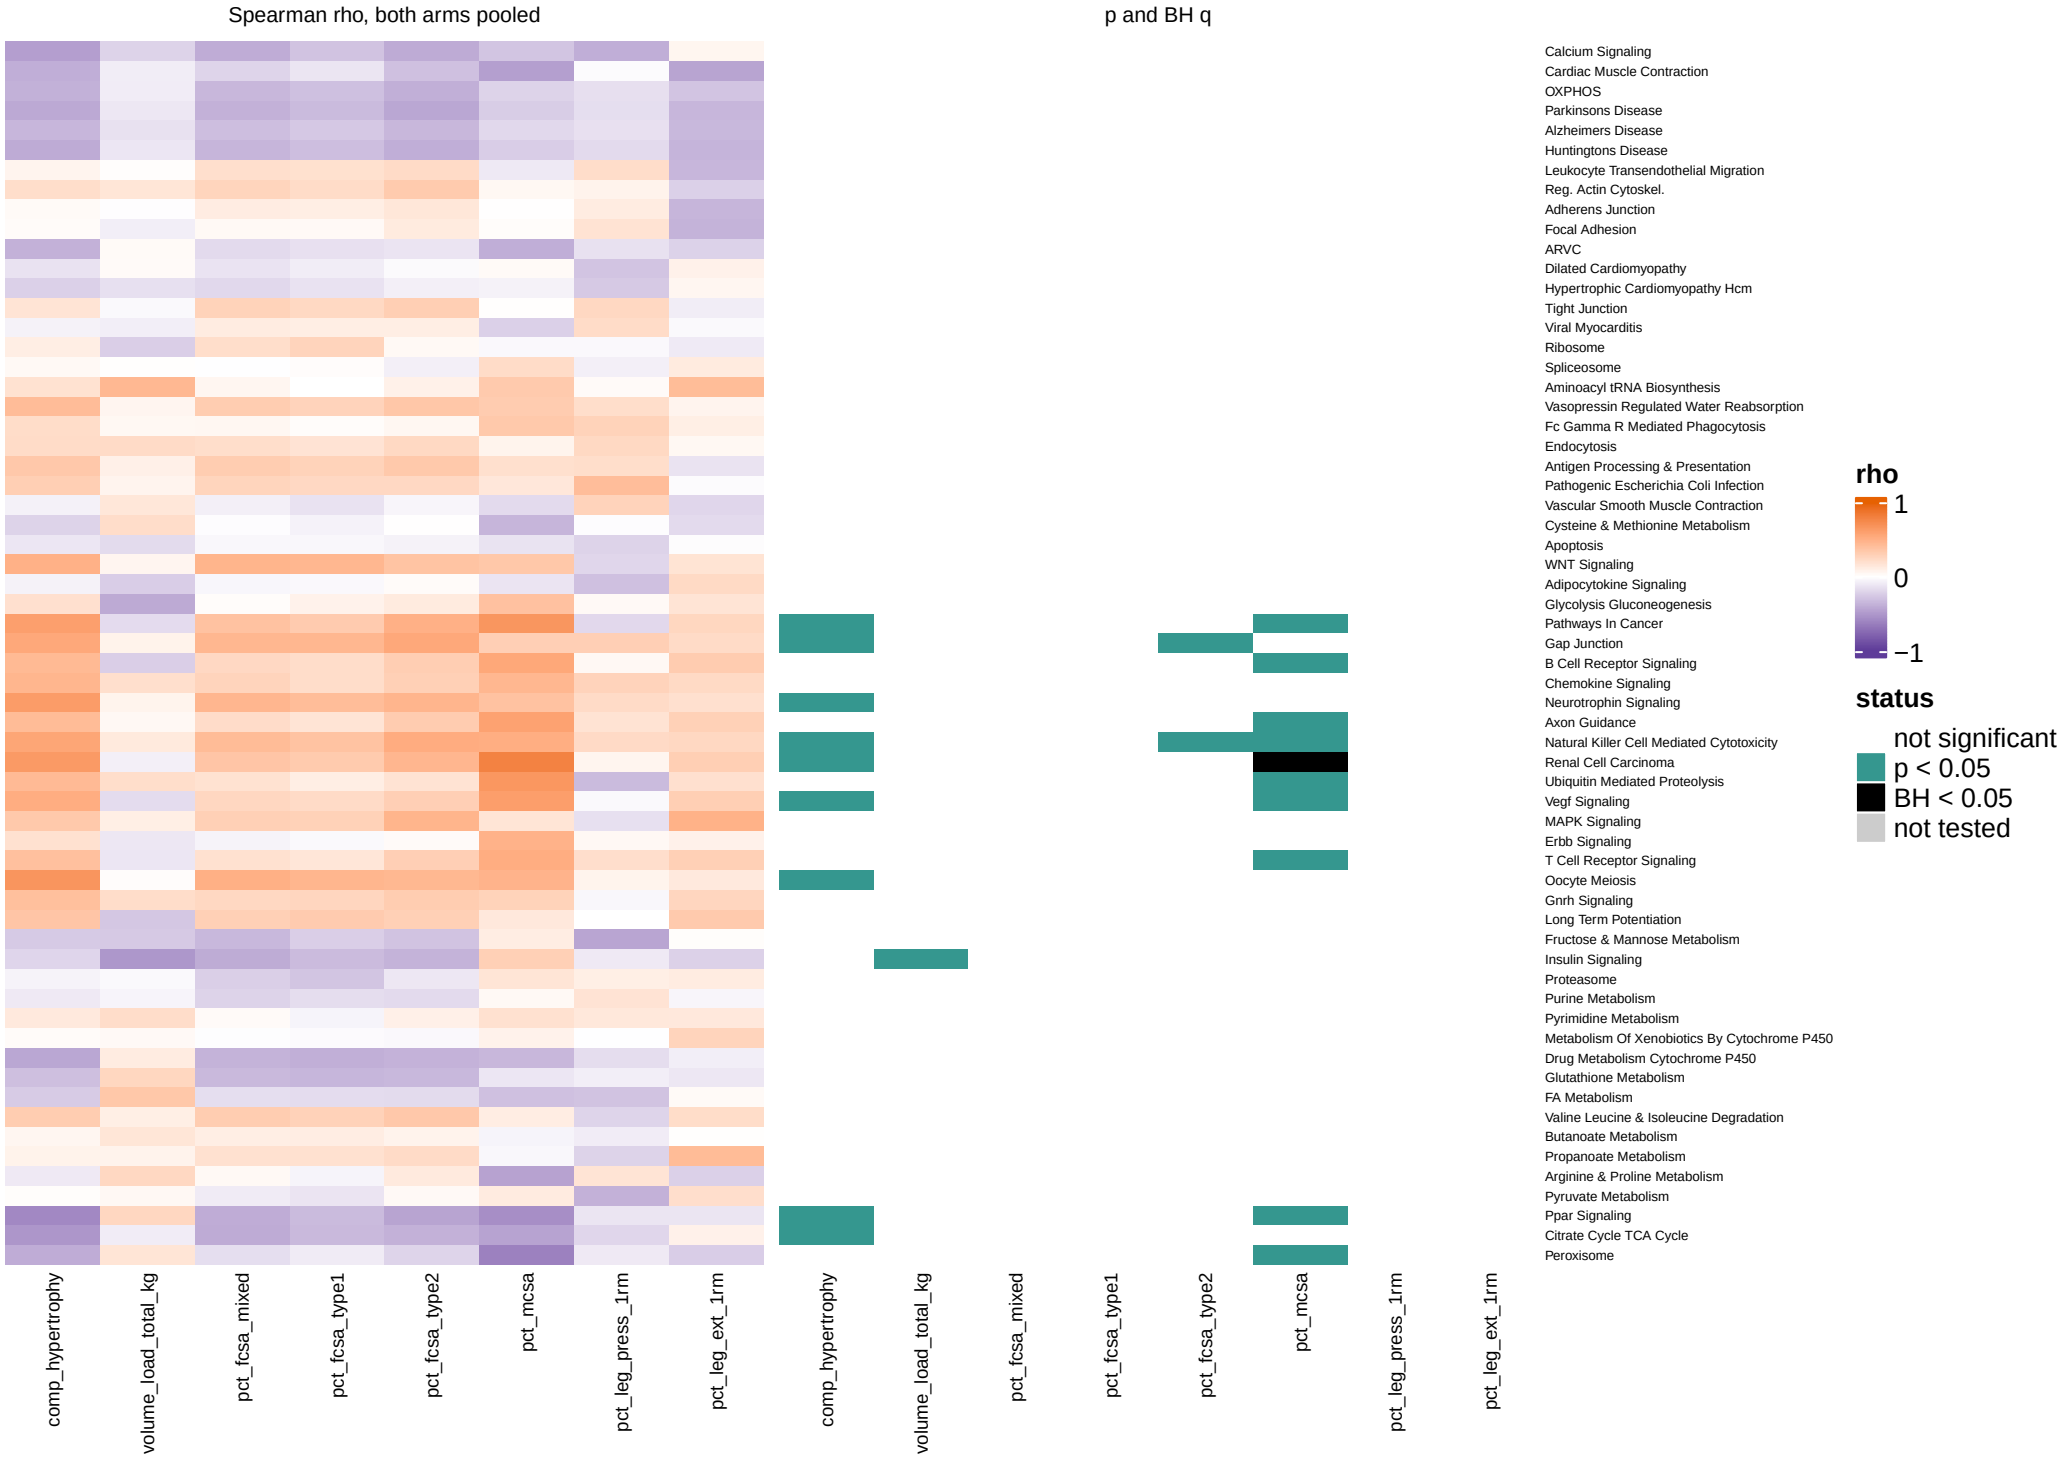


All 62 sets, one row each. Spearman rho between the singscore (change, T2 to T3) and each outcome. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/04_associate.xlsx, change_score.

# Sample model overview: GOBP

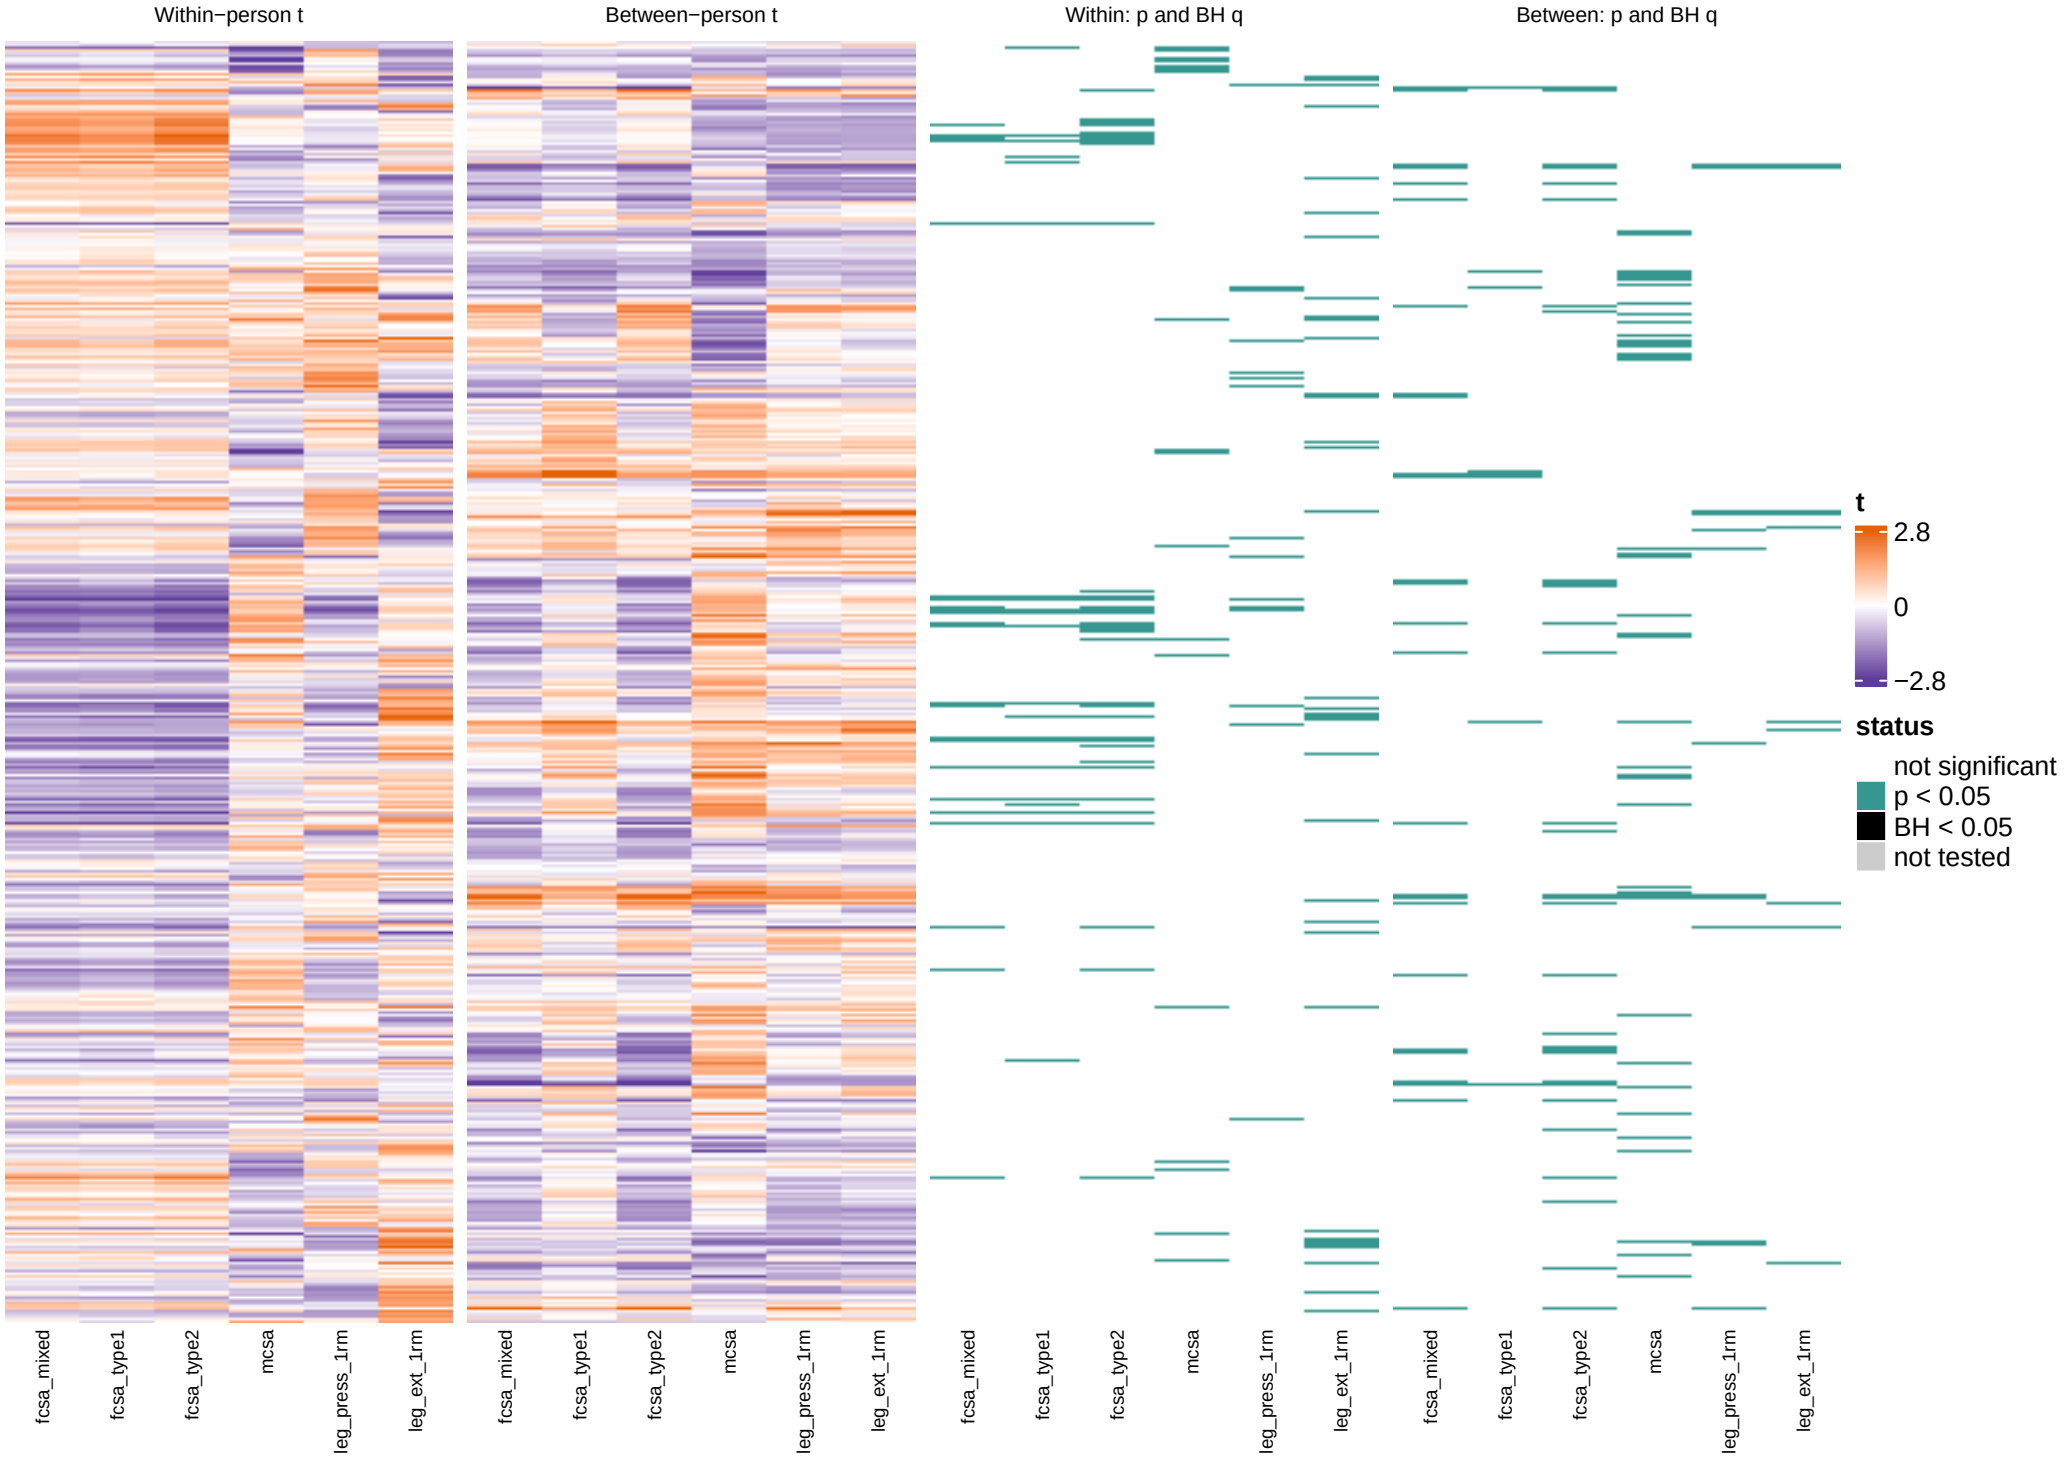


All 897 sets, one row each. Moderated t of the within and between terms, abundance ~ timepoint + between + within, subject blocked. Colours stop at the 99th percentile of |t|, 2.8. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/04_associate.xlsx, model.

# Change score overview, training window: GOBP





All 897 sets, one row each. Spearman rho between the singscore (change, T1 to T2) and each outcome. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/04_associate.xlsx, change_score.

# Change score overview, baseline window: GOBP





All 897 sets, one row each. Spearman rho between the singscore (T1 level) and each outcome. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/04_associate.xlsx, change_score.

# Change score overview, acute window: GOBP

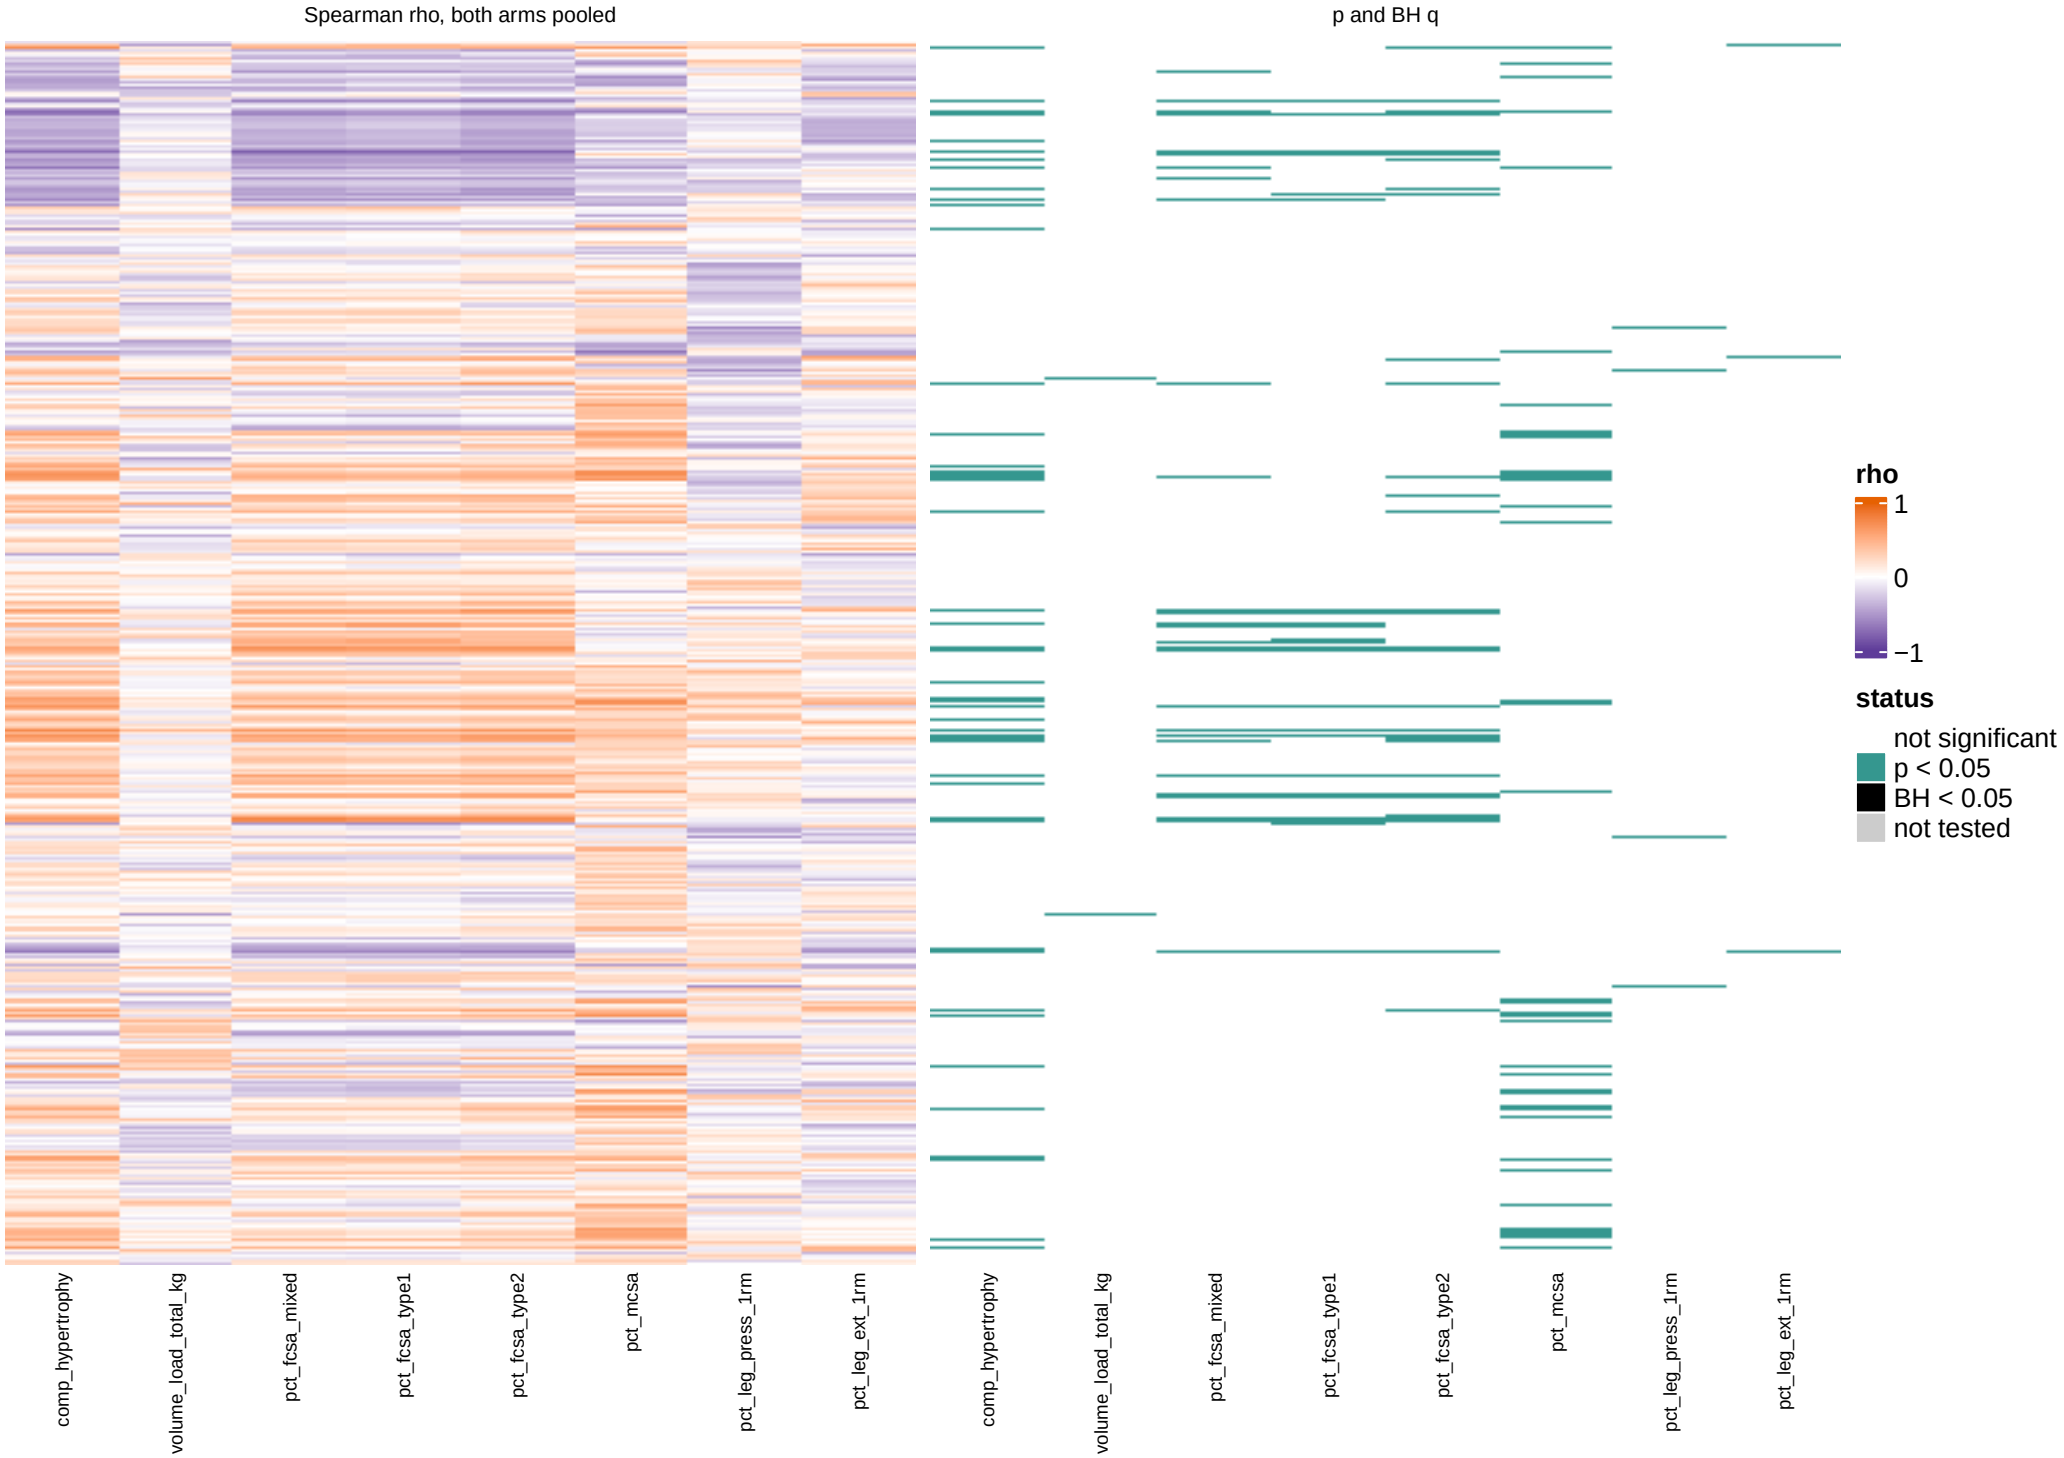


All 897 sets, one row each. Spearman rho between the singscore (change, T2 to T3) and each outcome. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/04_associate.xlsx, change_score.

# Sample model overview: GO_Slim

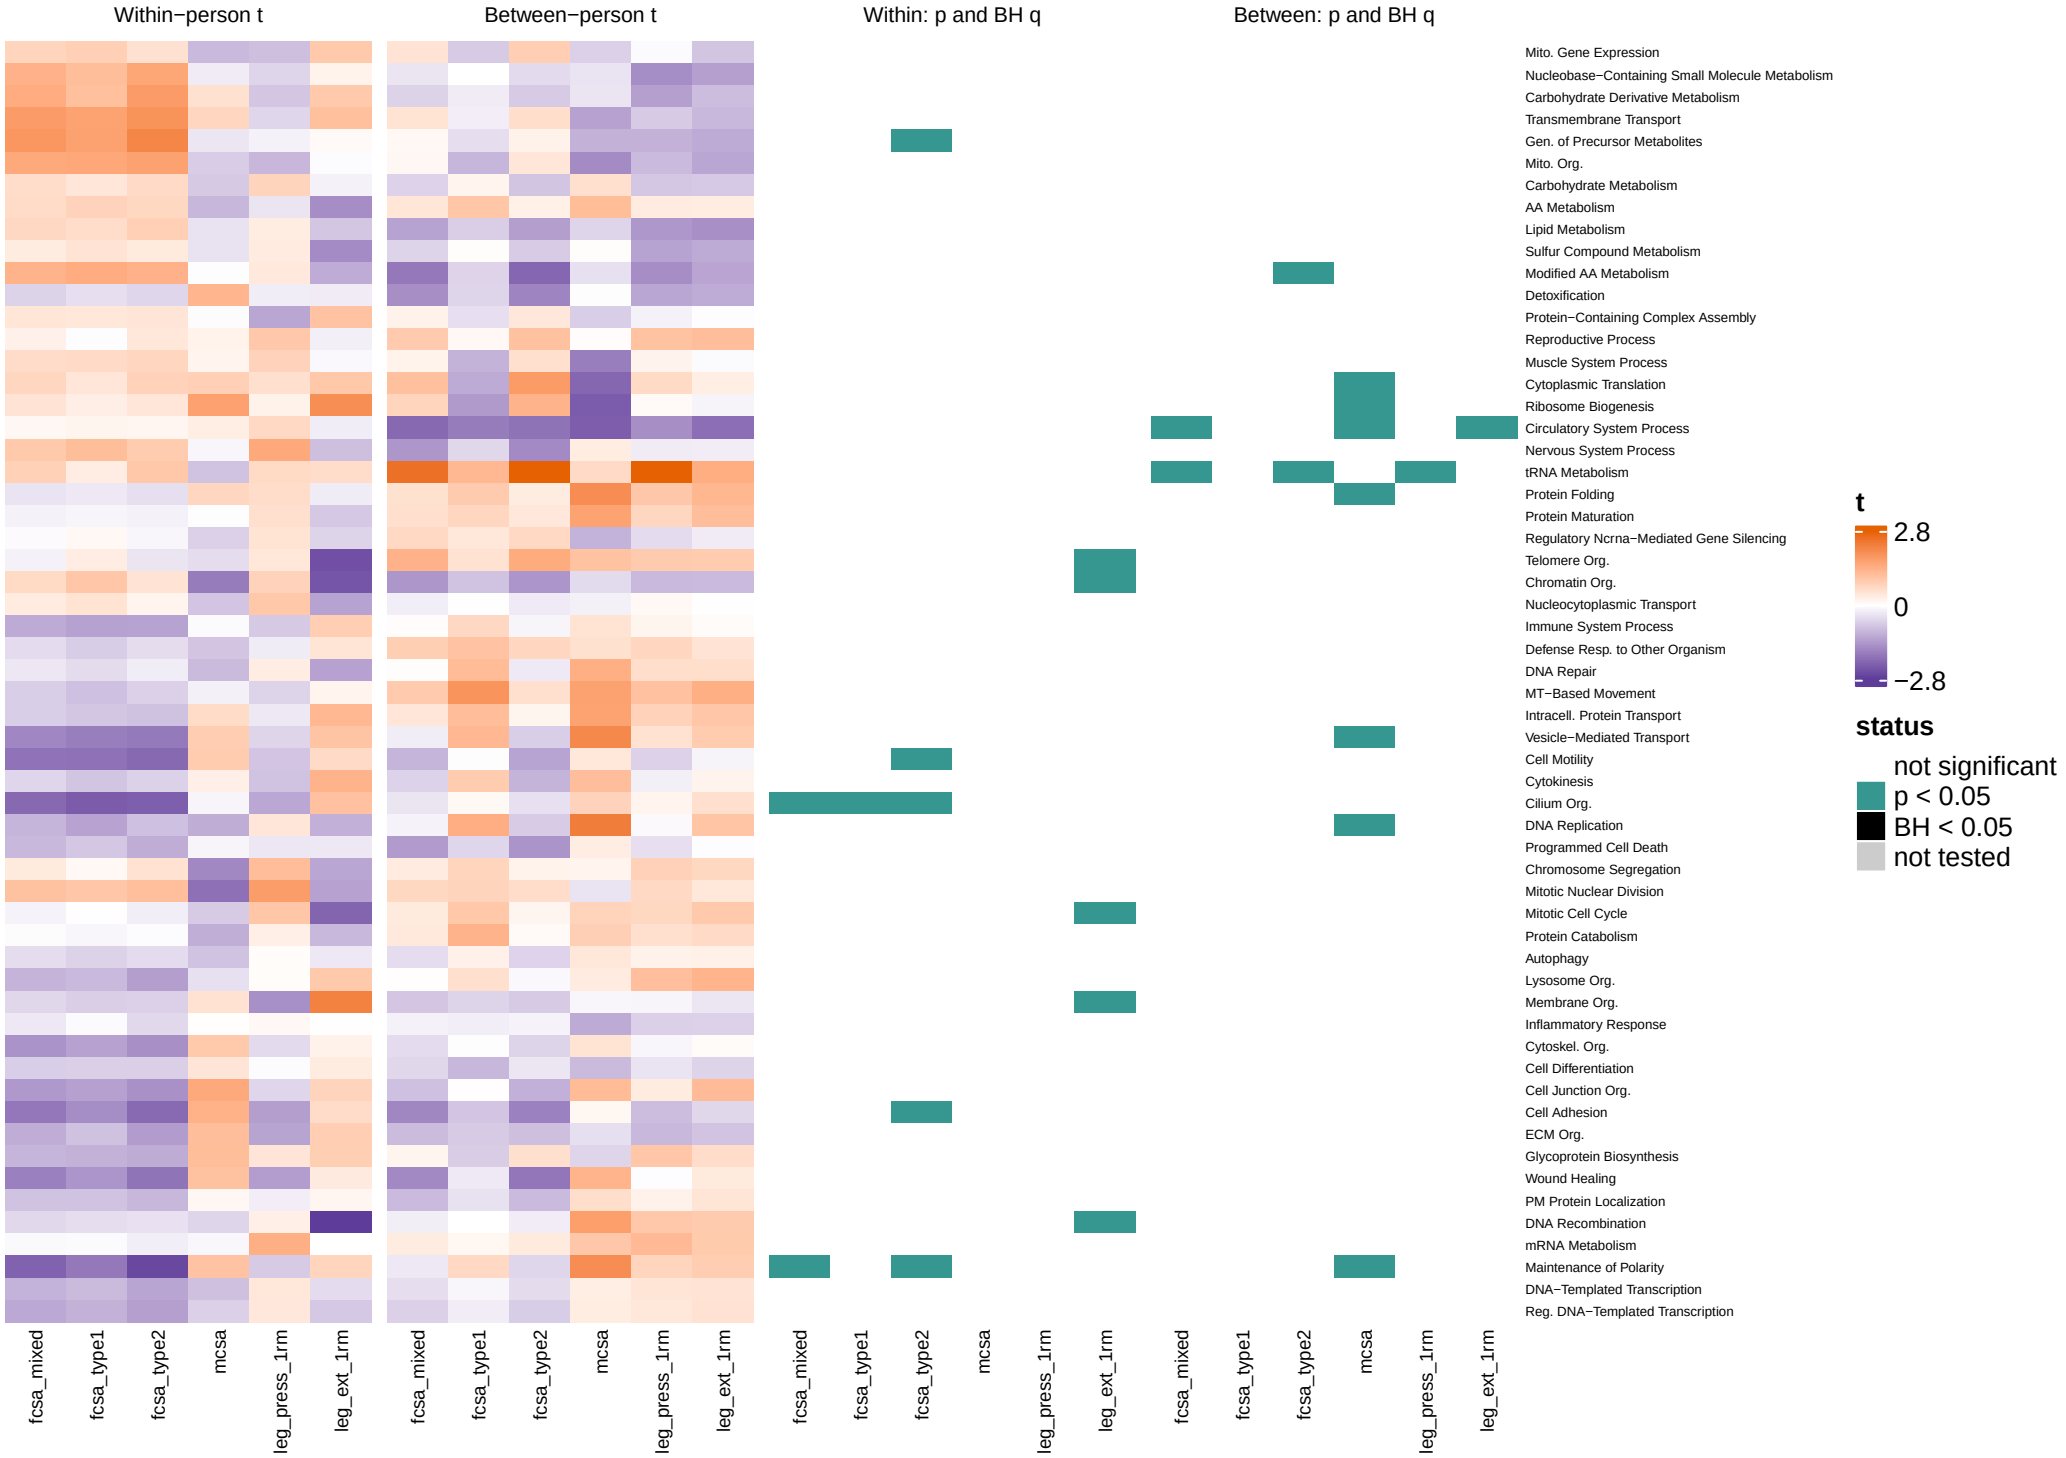



All 58 sets, one row each. Moderated t of the within and between terms, abundance ~ timepoint + between + within, subject blocked. Colours stop at the 99th percentile of |t|, 2.8. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/04_associate.xlsx, model.

# Change score overview, training window: GO_Slim





All 58 sets, one row each. Spearman rho between the singscore (change, T1 to T2) and each outcome. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/04_associate.xlsx, change_score.

# Change score overview, baseline window: GO_Slim

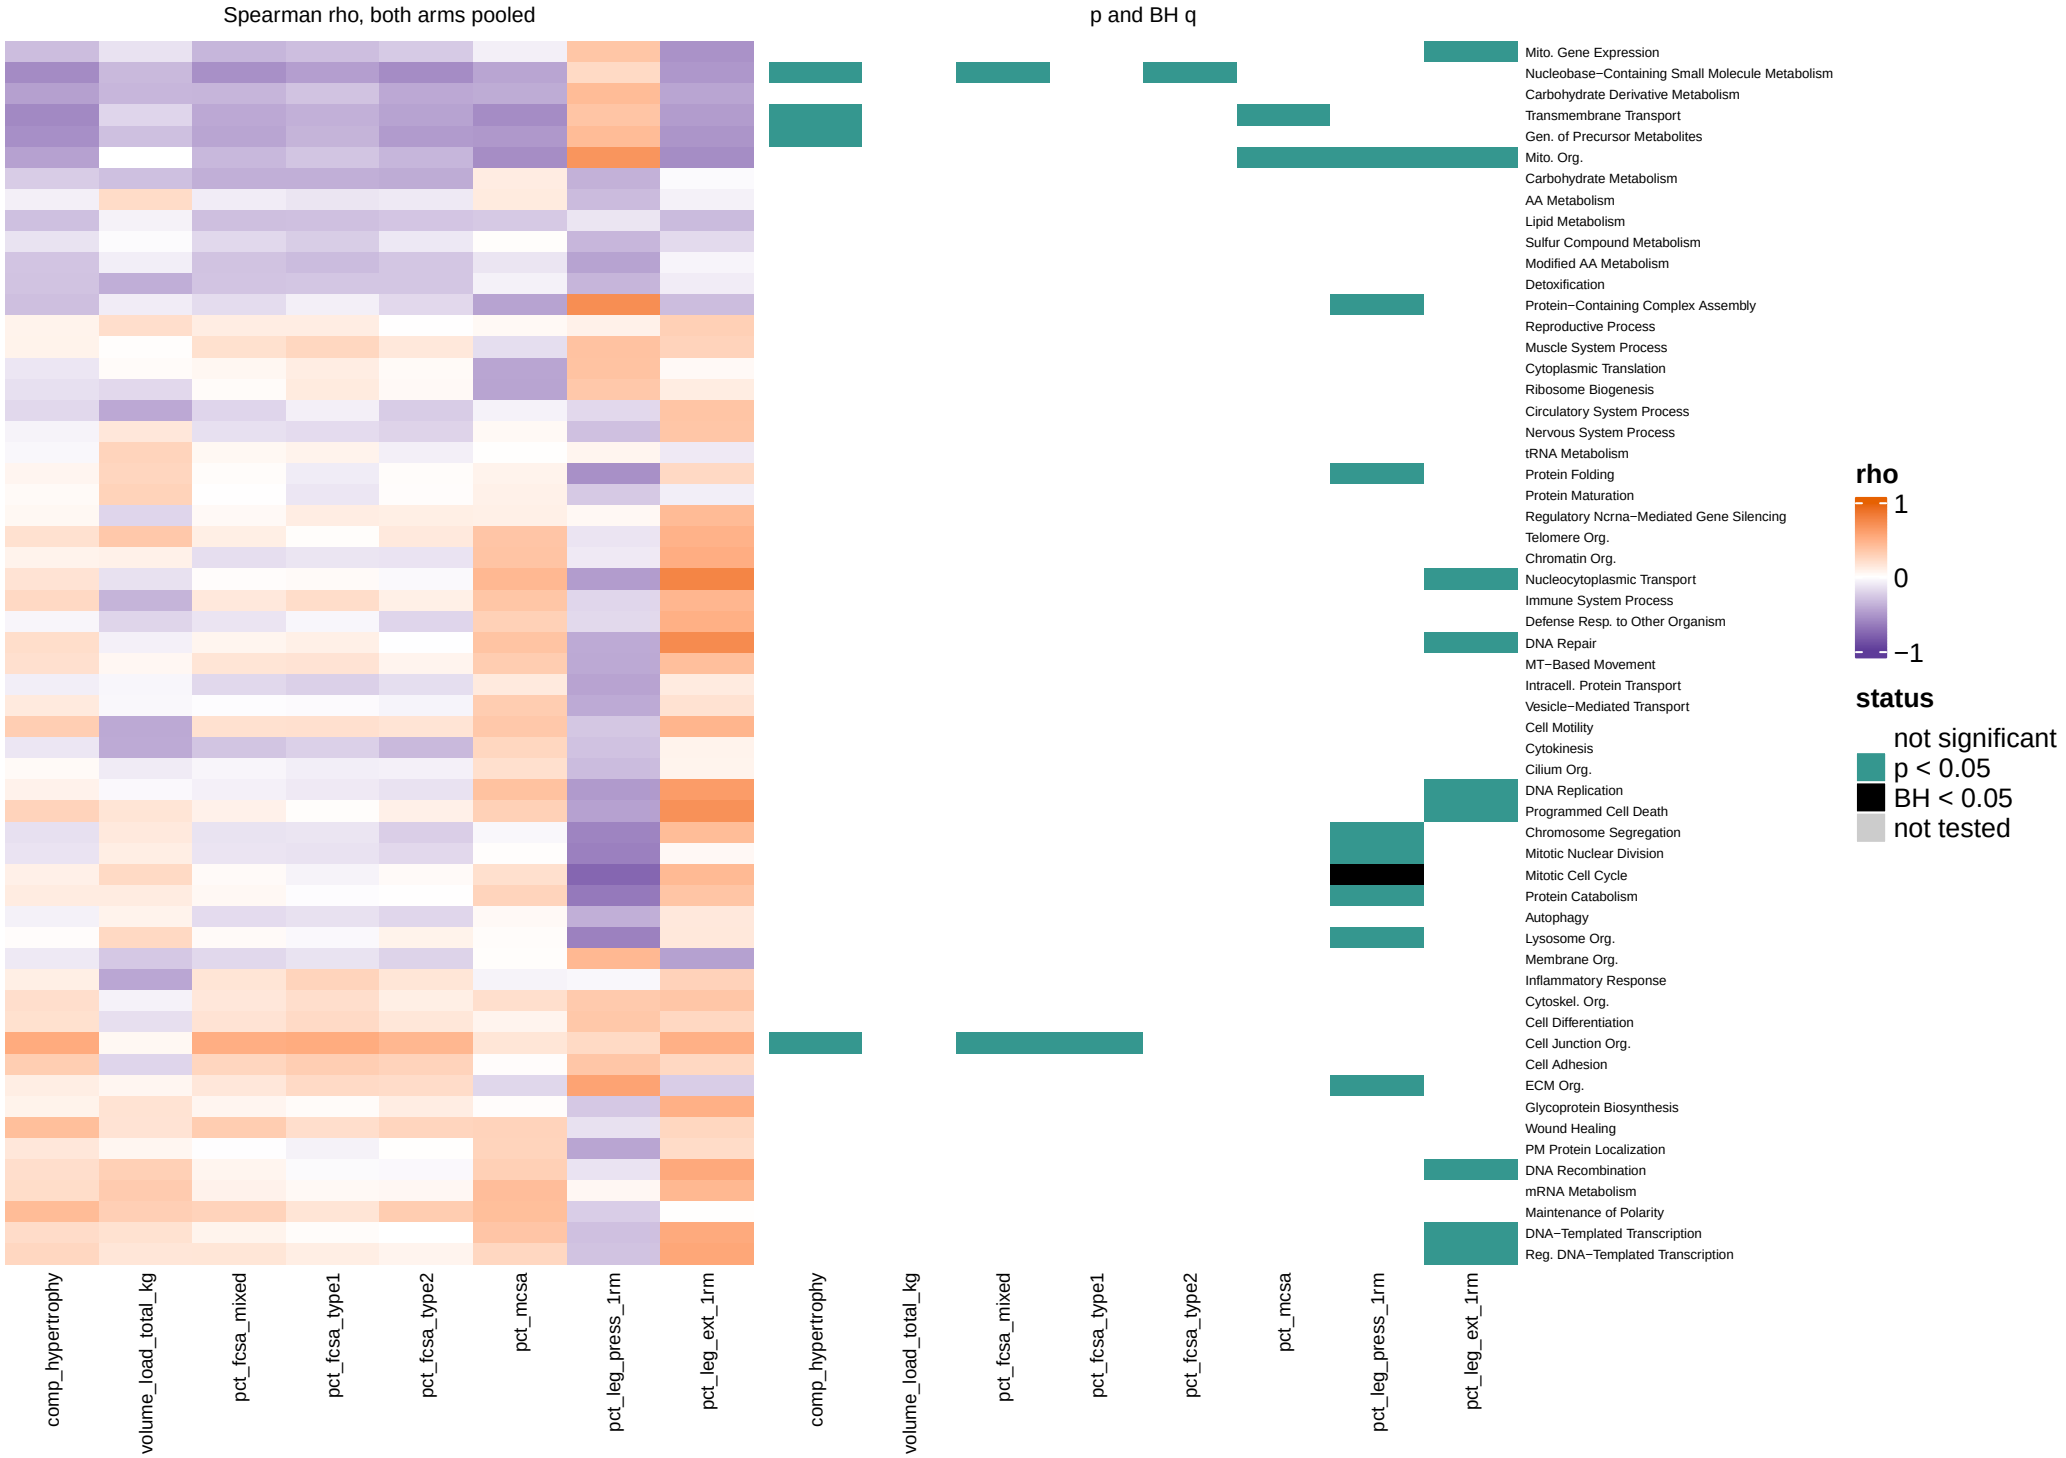


All 58 sets, one row each. Spearman rho between the singscore (T1 level) and each outcome. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/04_associate.xlsx, change_score.


# Change score overview, acute window: GO_Slim

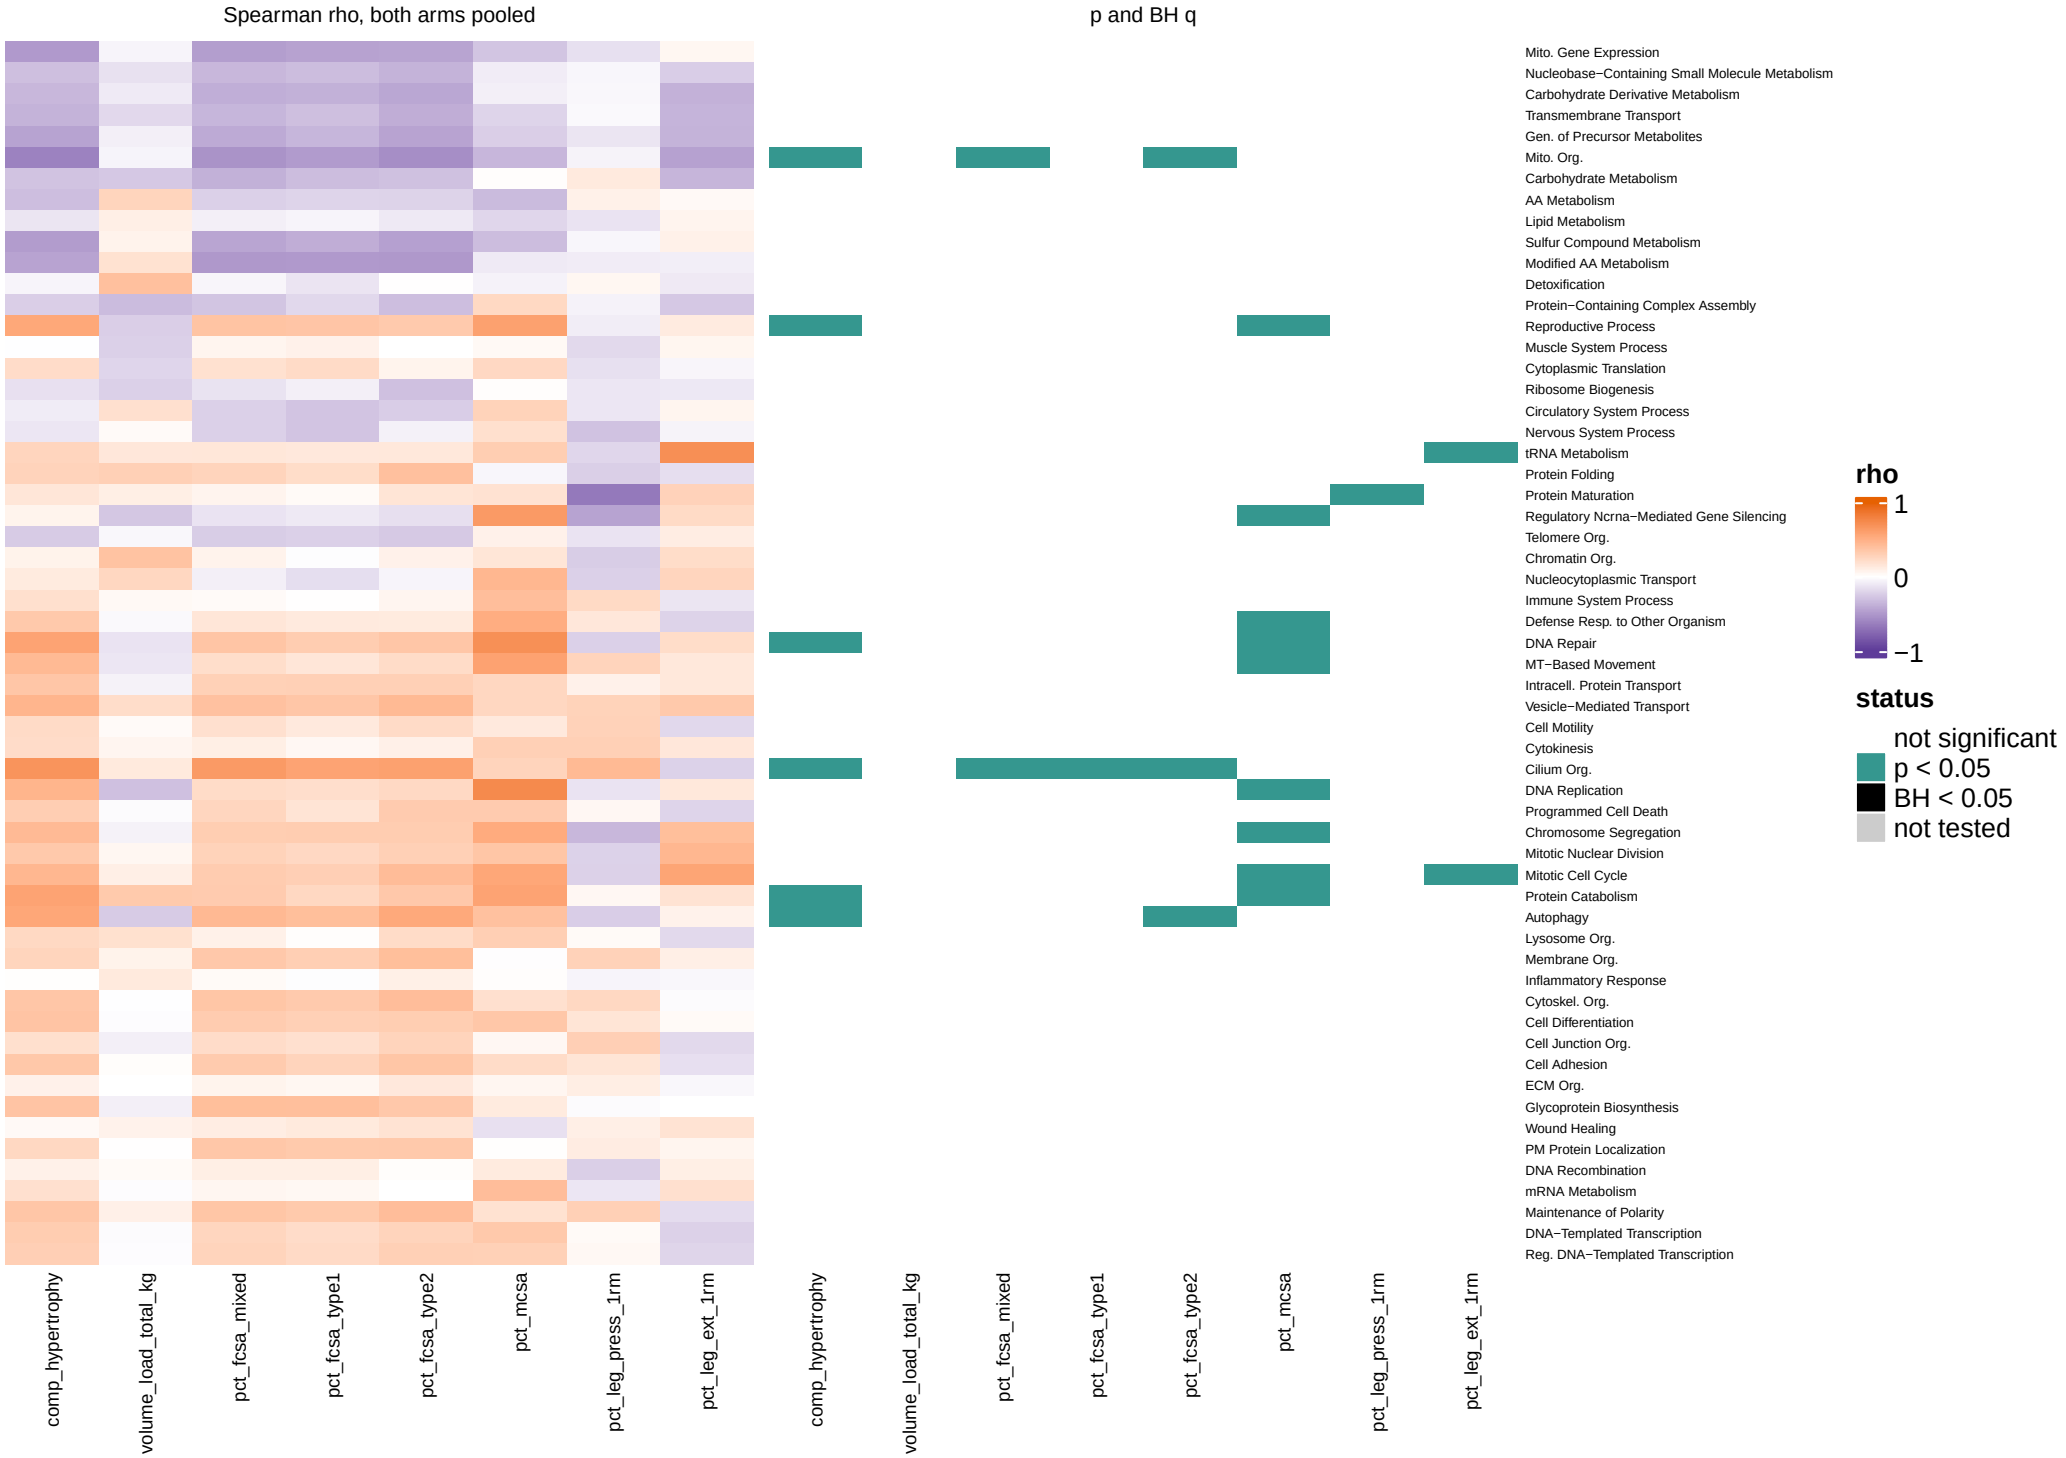


All 58 sets, one row each. Spearman rho between the singscore (change, T2 to T3) and each outcome. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Grey: not tested. Table: c_data/04_associate.xlsx, change_score.

## fcsa_mixed, within−person term


63 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 1 of 6.

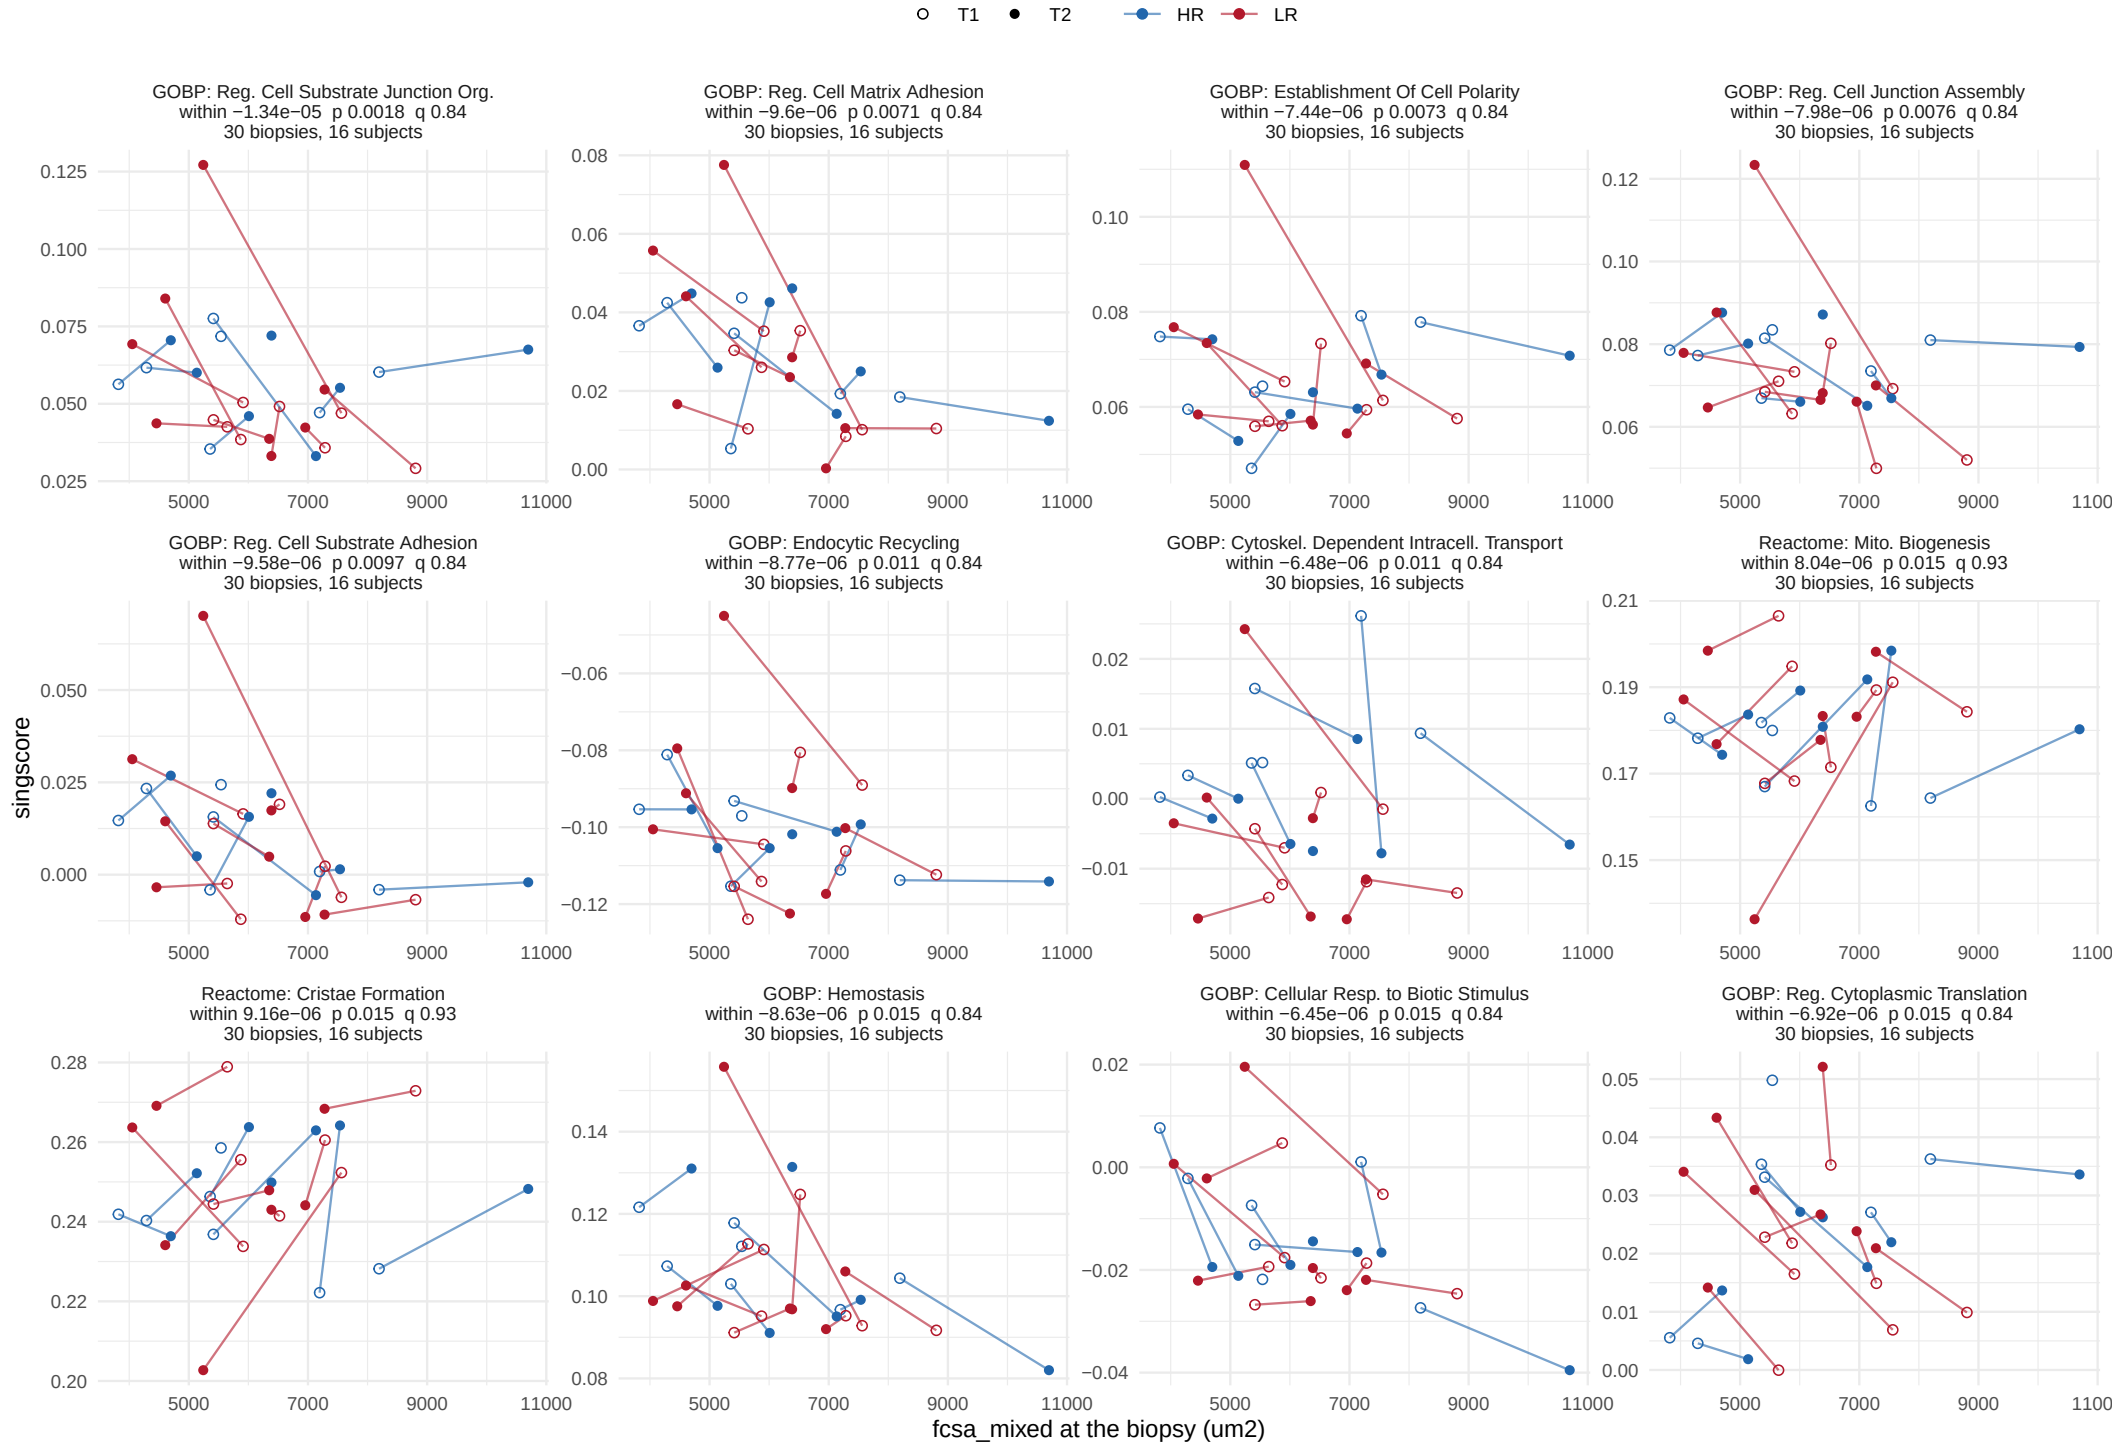


limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

## fcsa_mixed, within−person term


63 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 2 of 6.

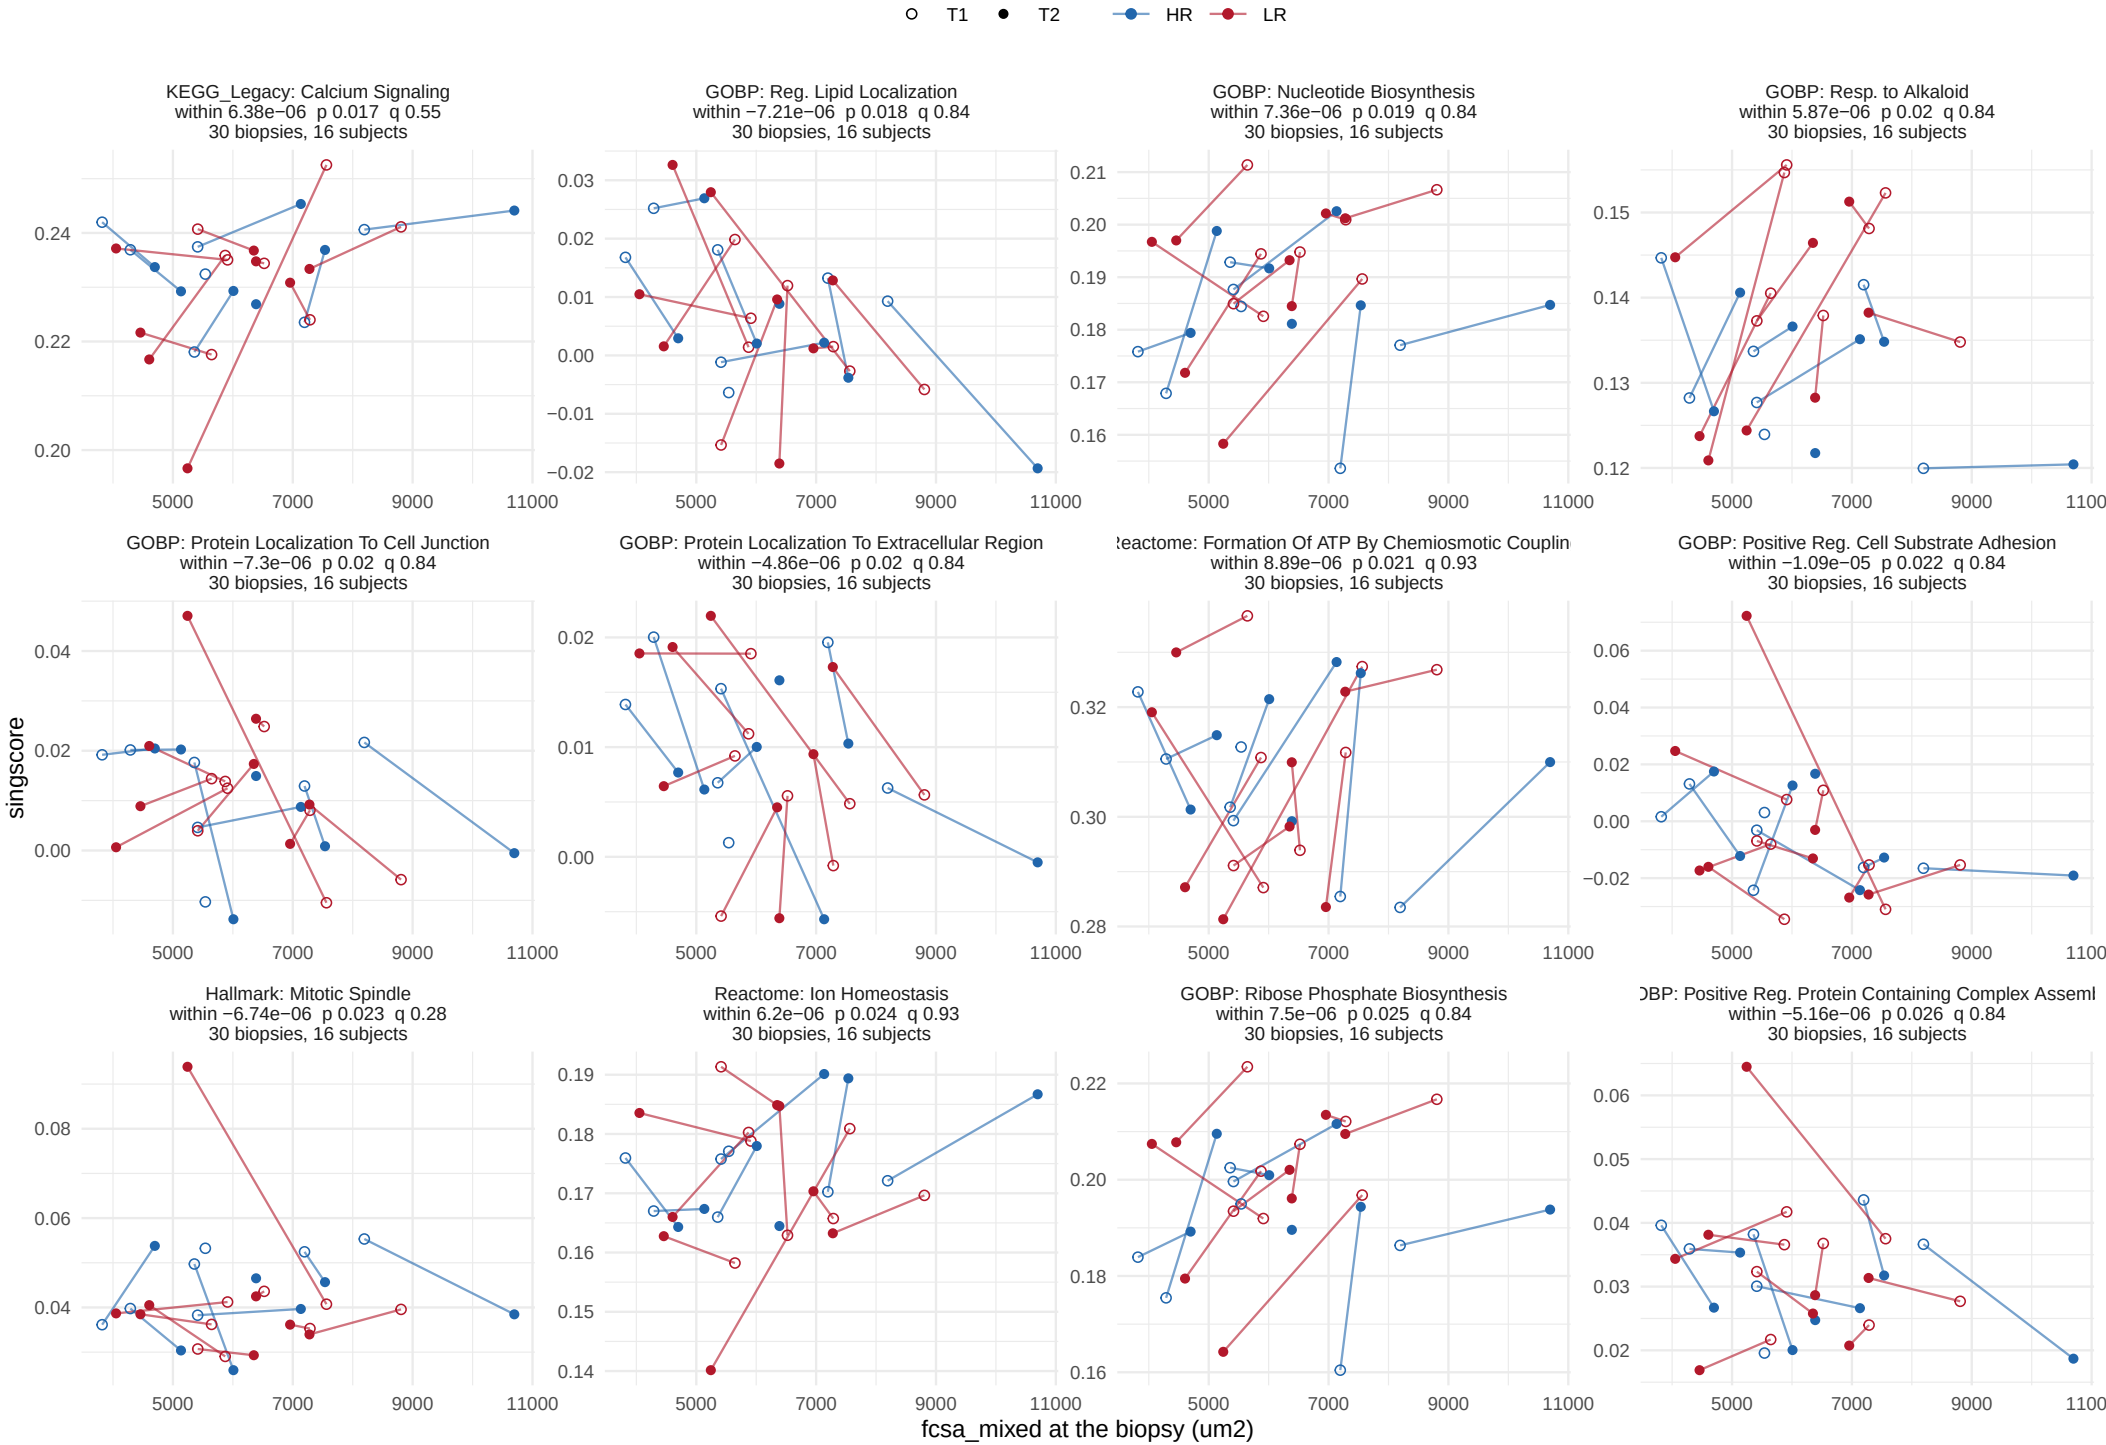


limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

## fcsa_mixed, within−person term


63 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 3 of 6.

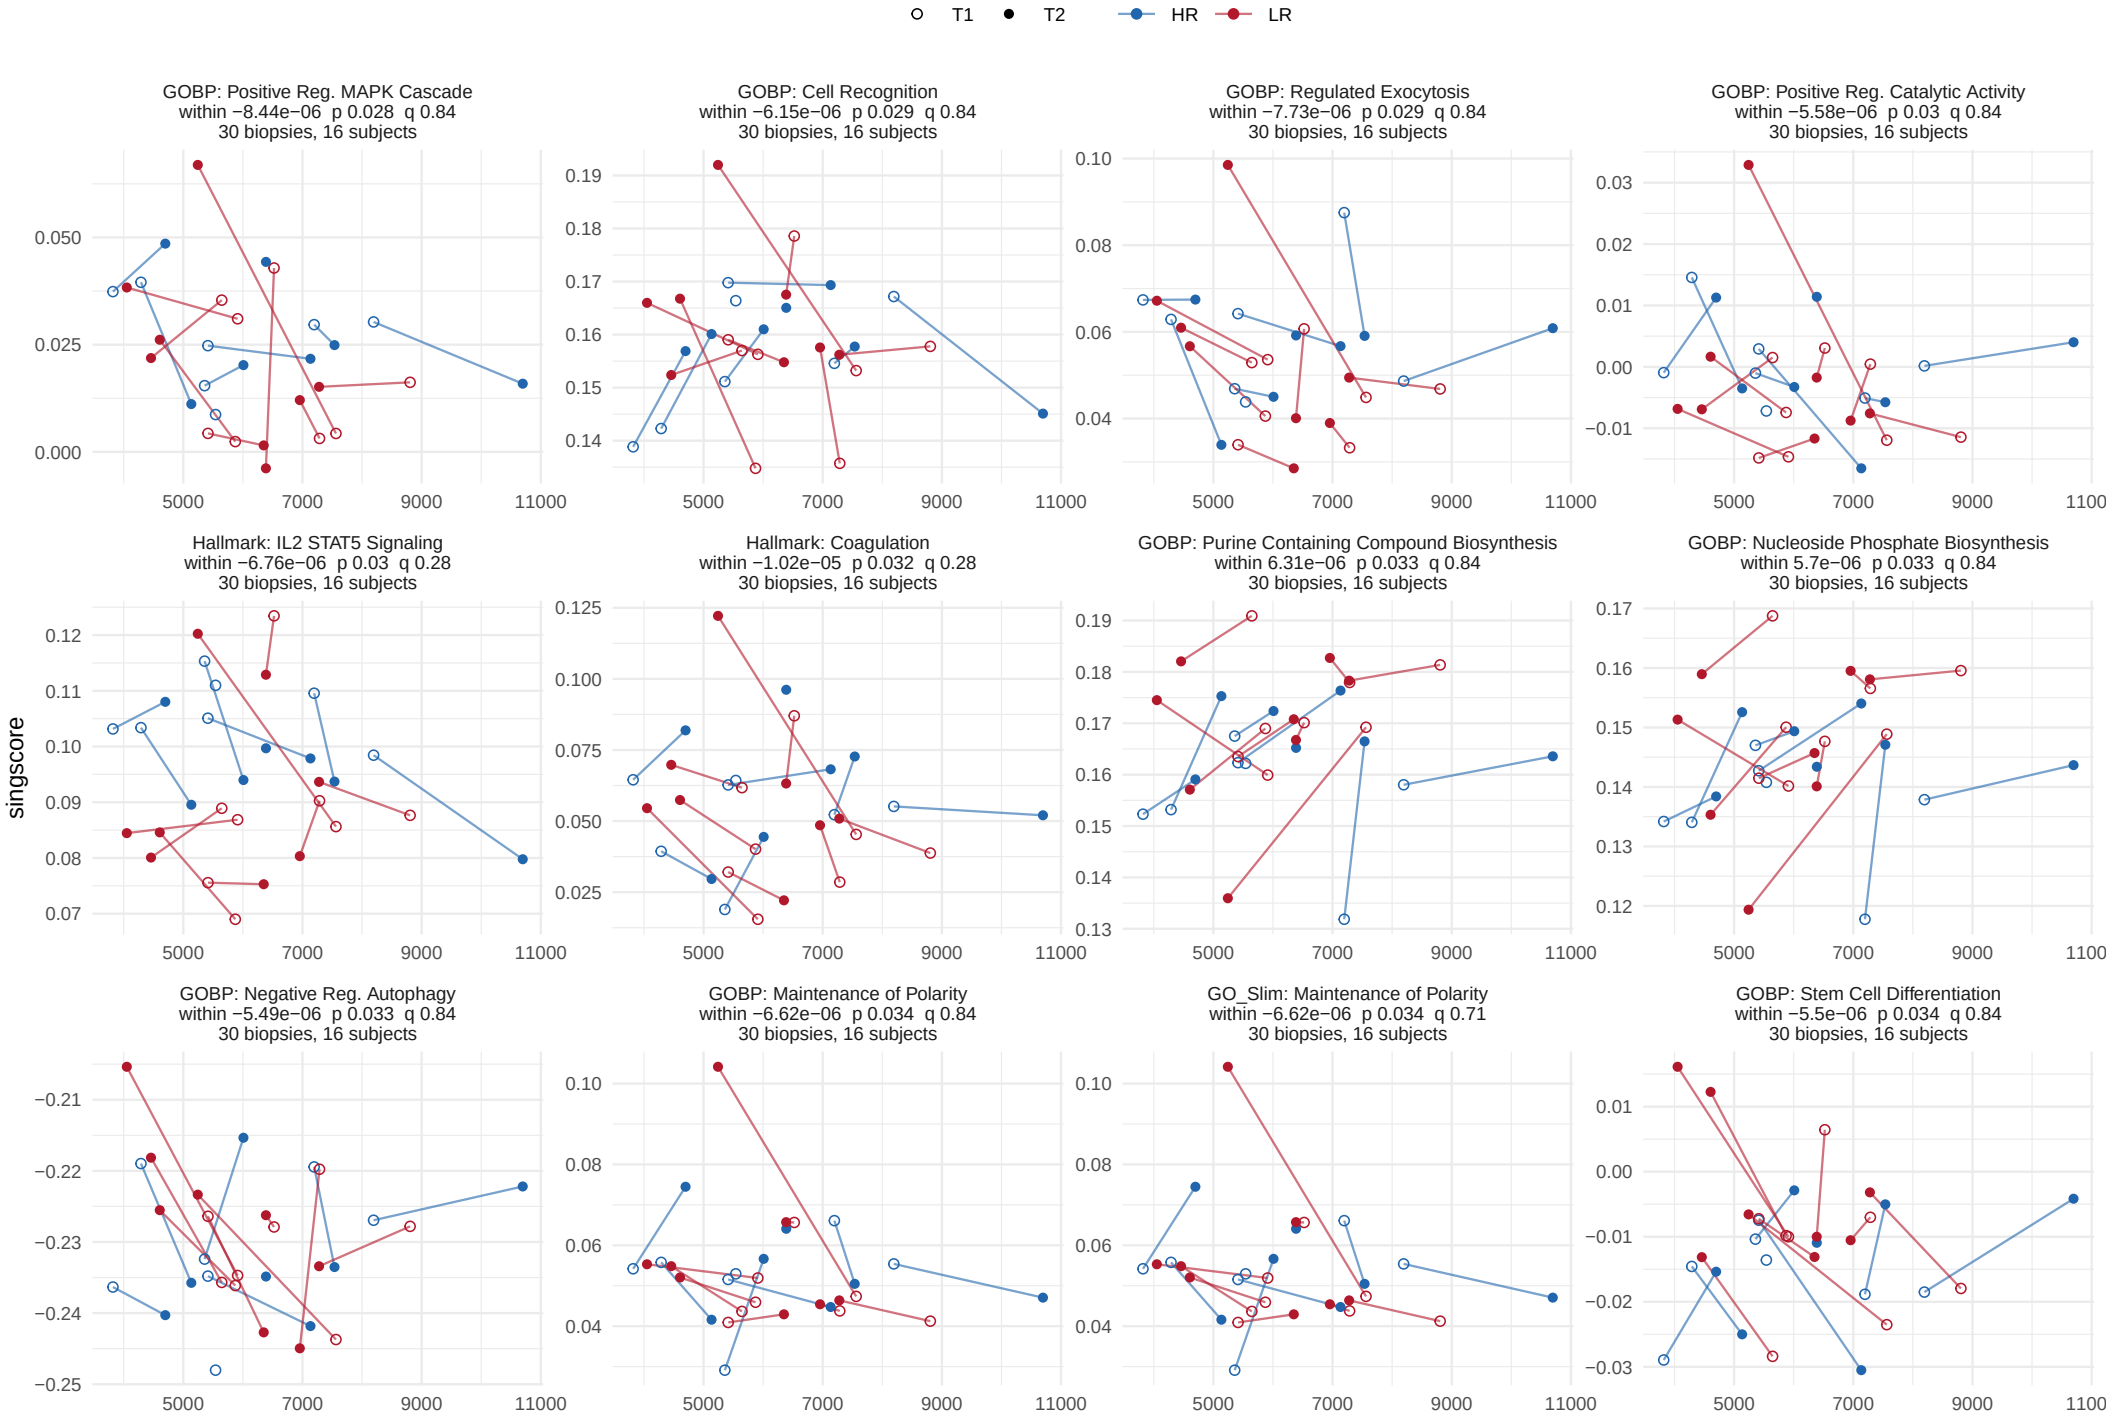


limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

## fcsa_mixed, within−person term


63 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 4 of 6.

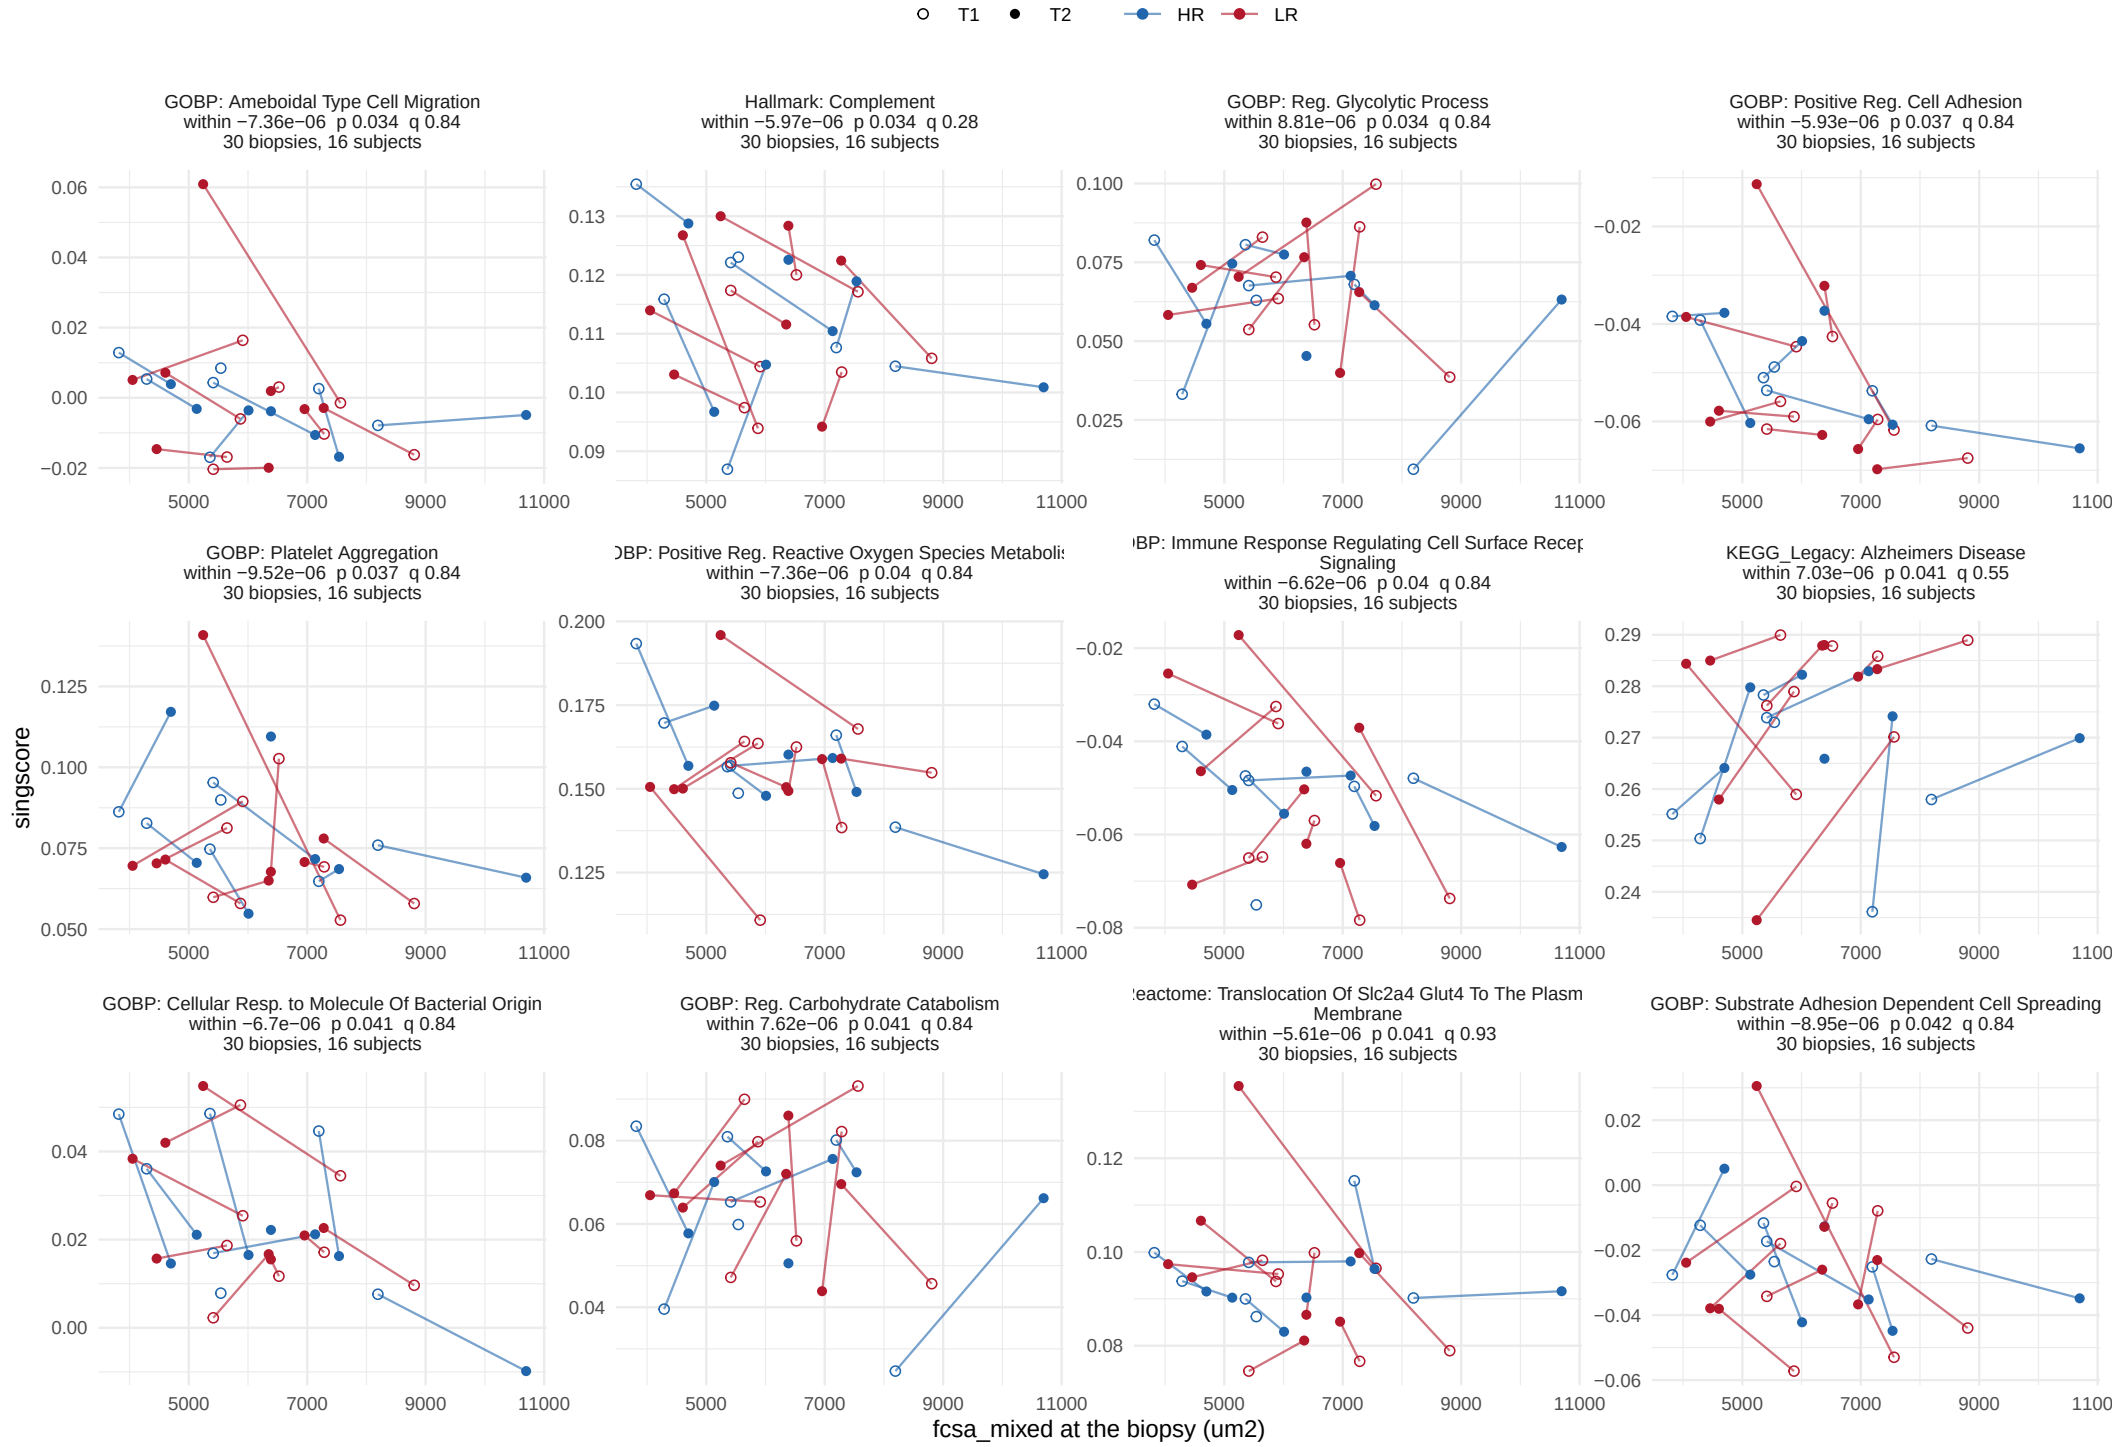


limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

## fcsa_mixed, within−person term


63 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 5 of 6.

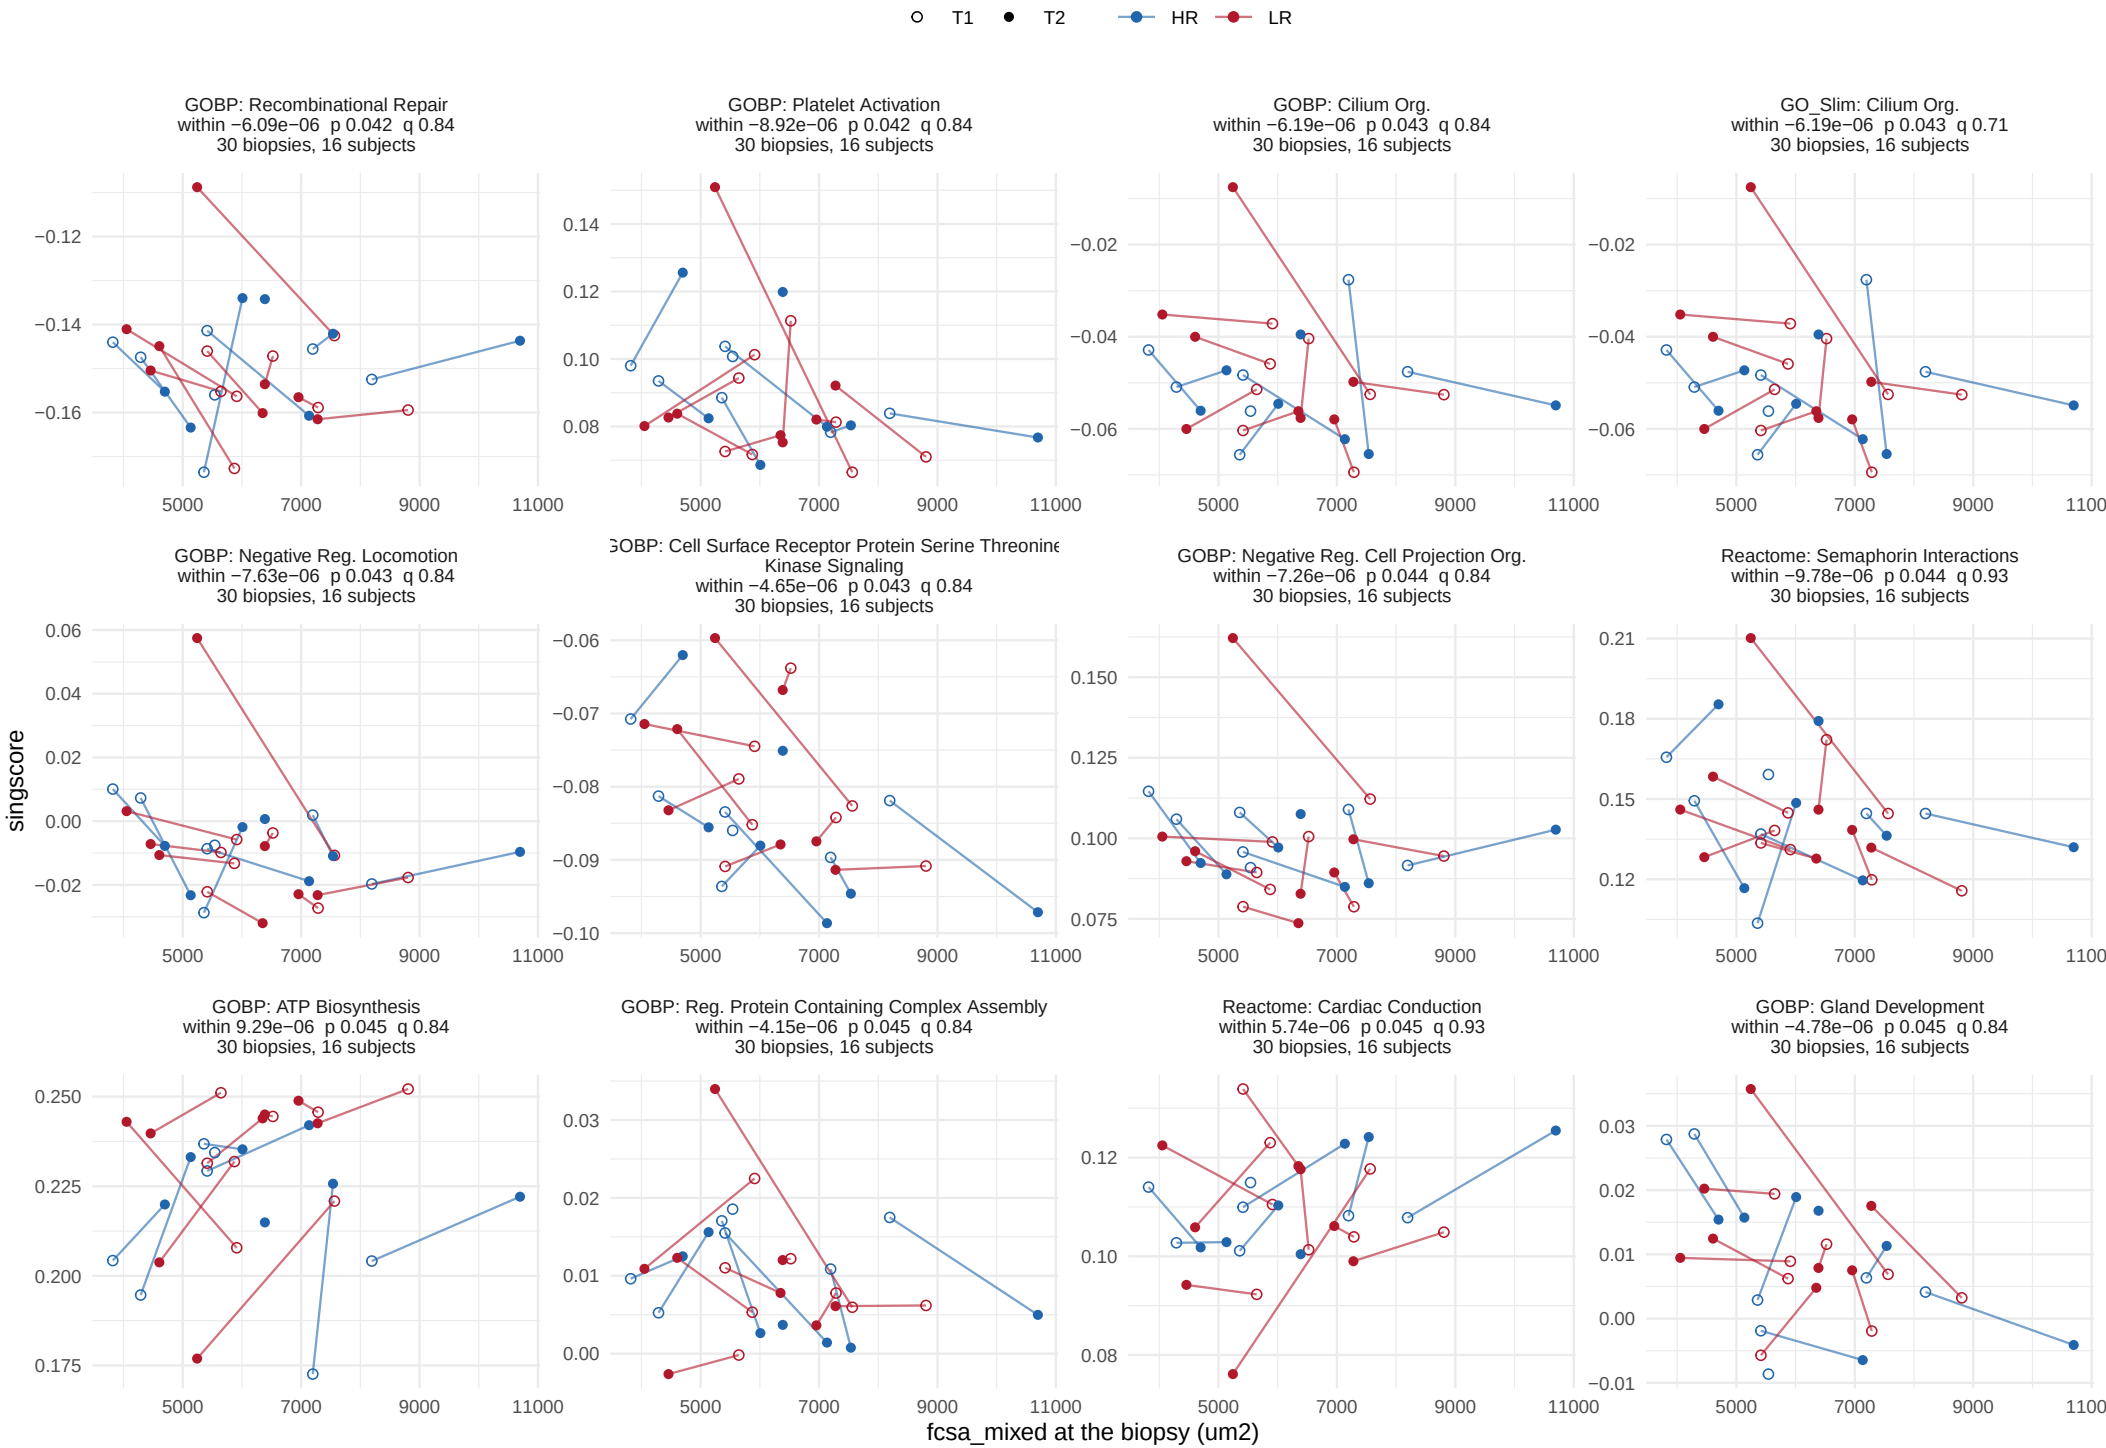


limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

## fcsa_mixed, within−person term


63 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 6 of 6.

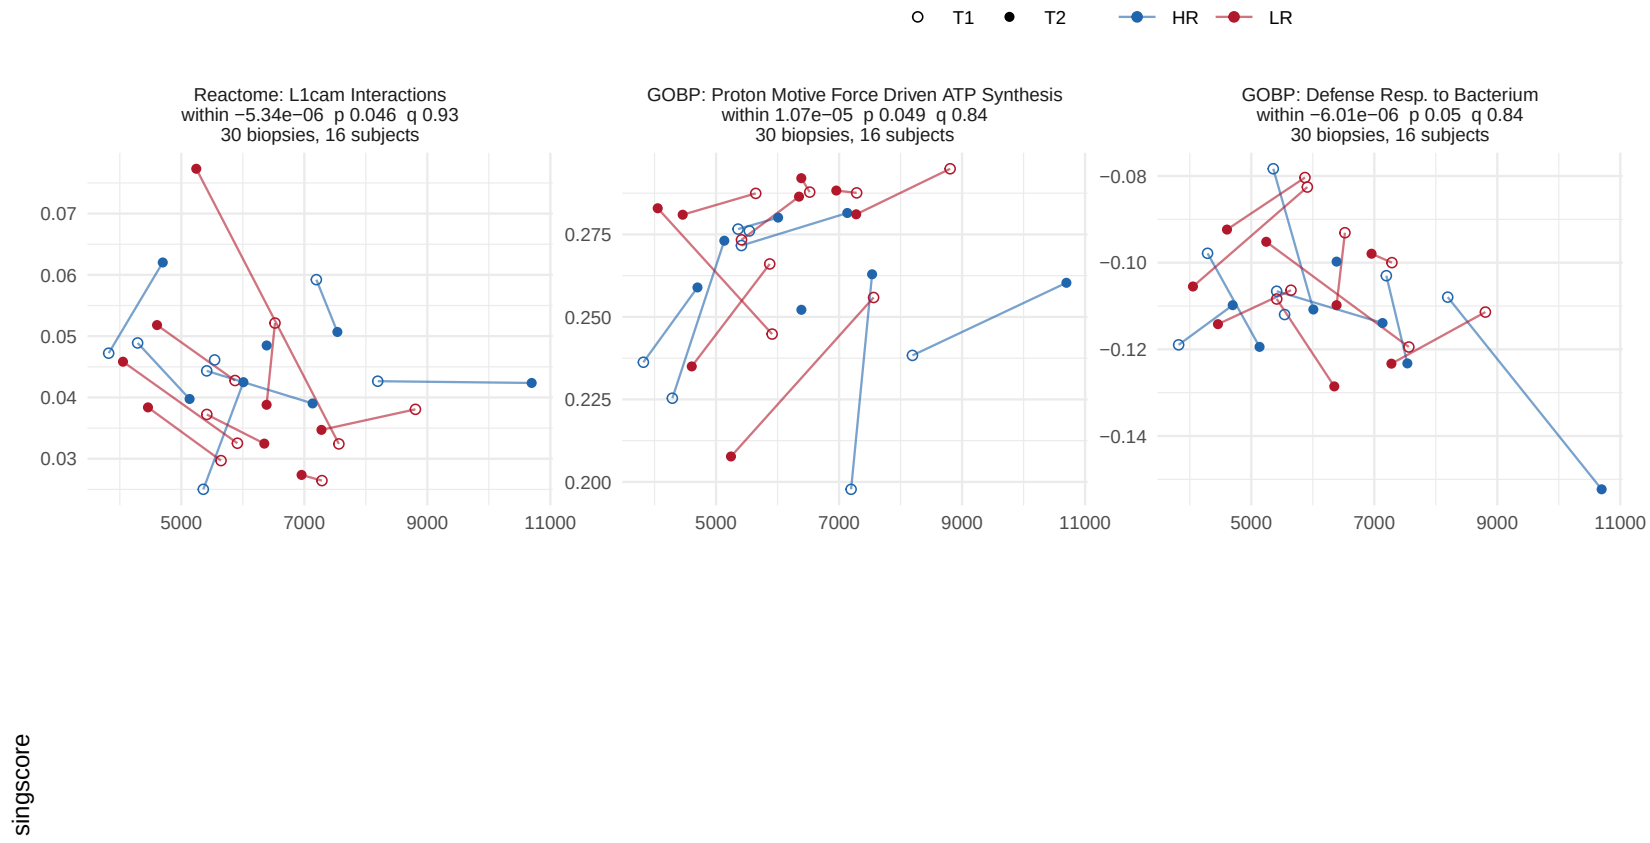


limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

## fcsa_mixed, between−person term


64 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 1 of 6.

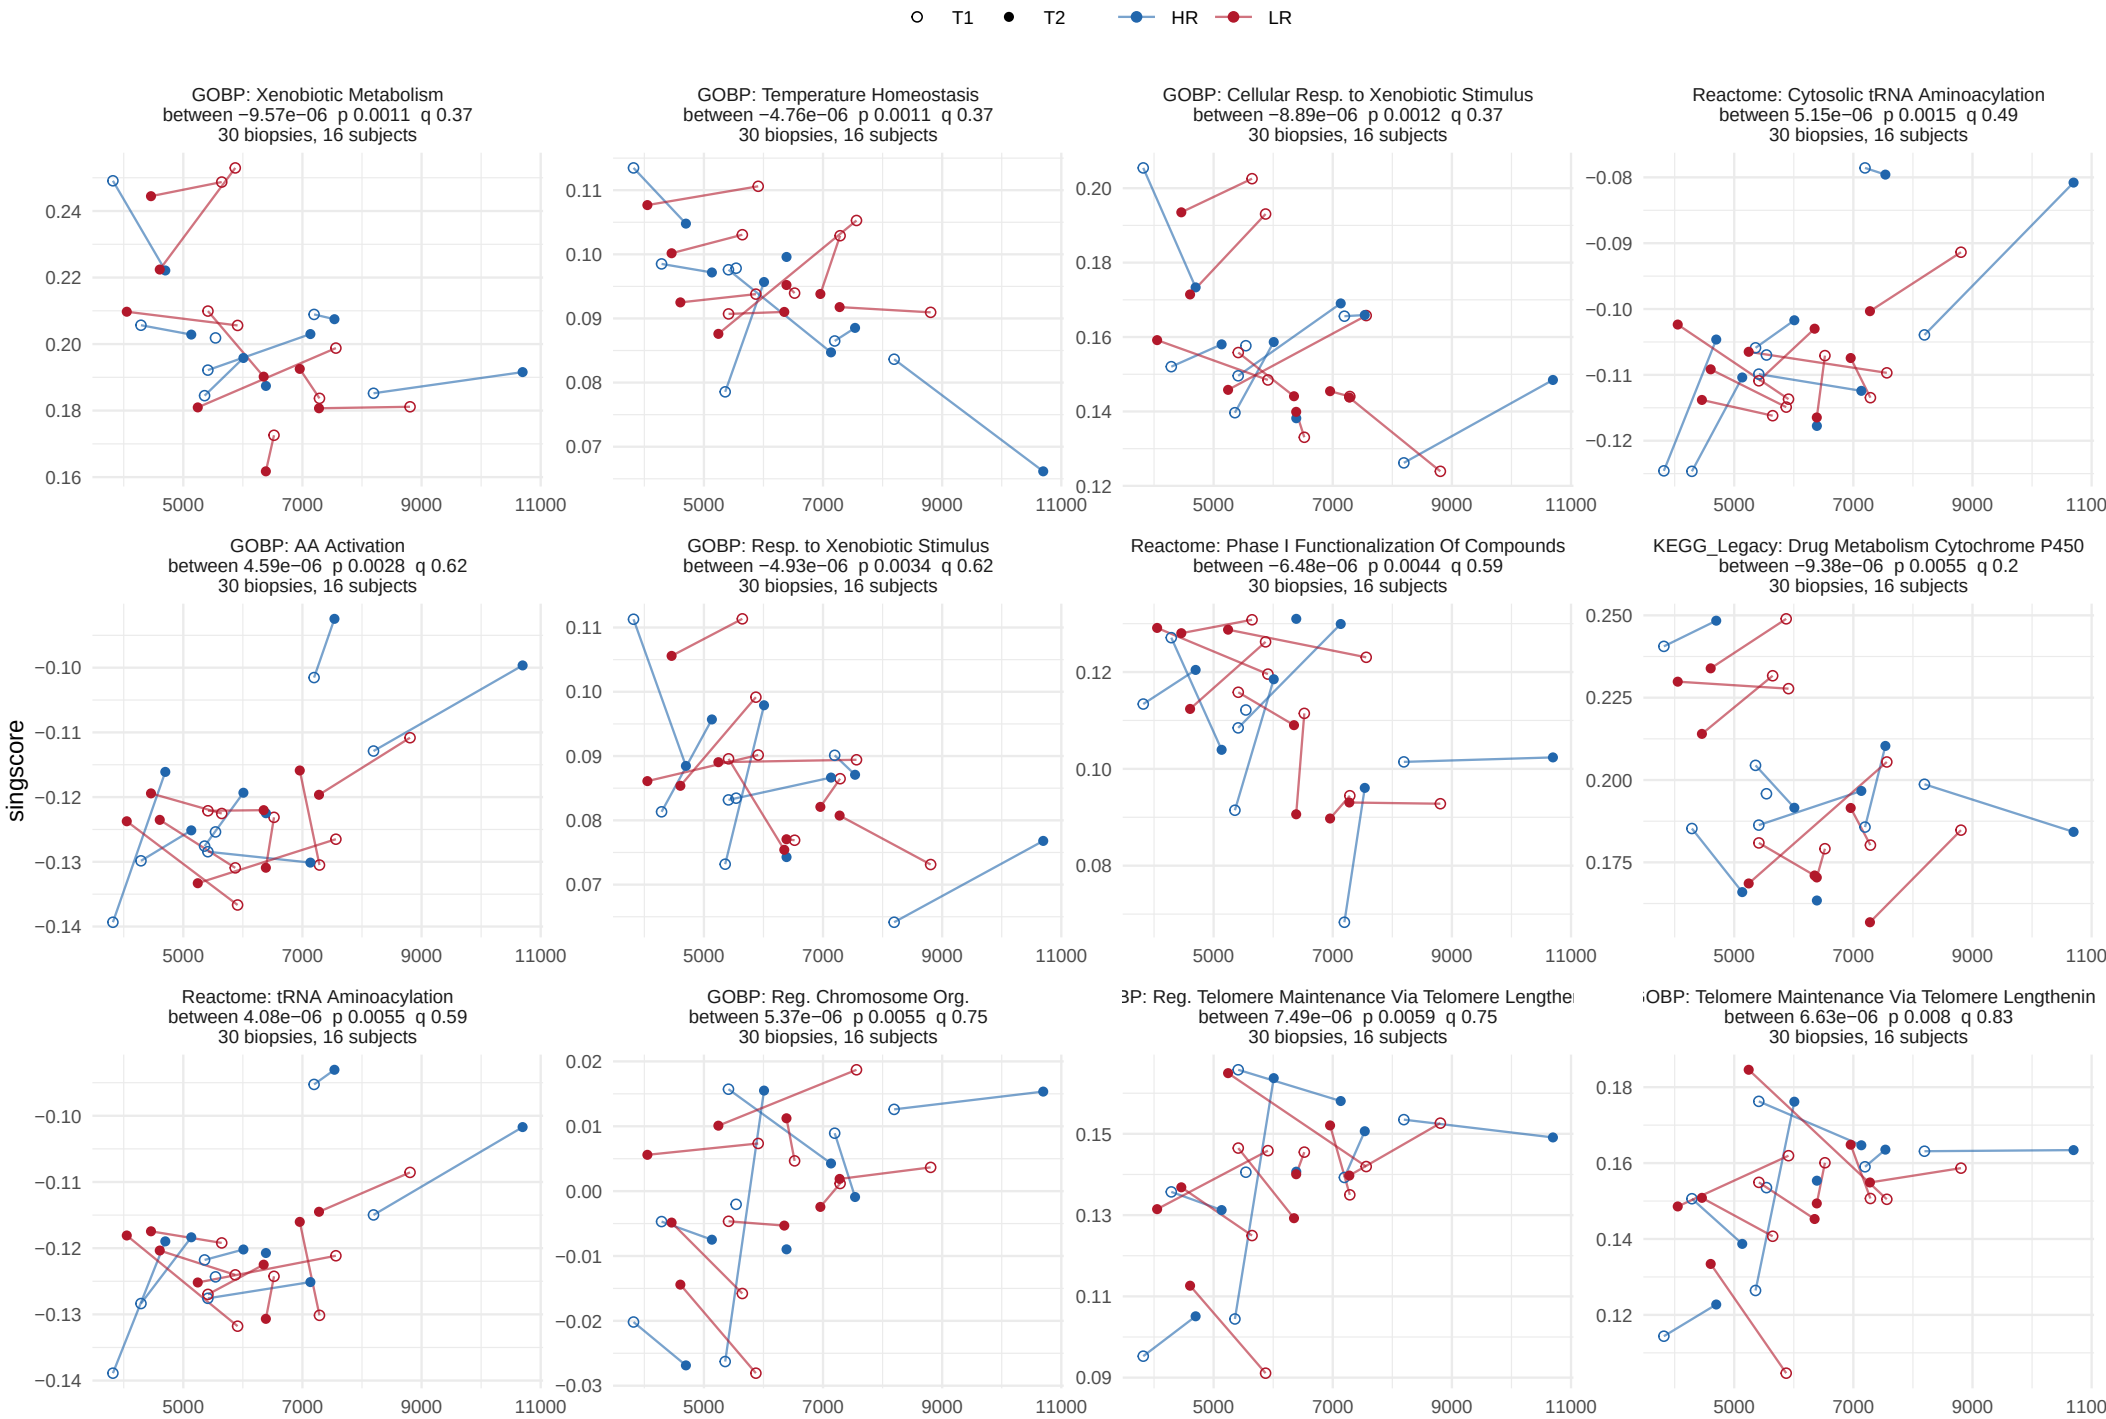


limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

## fcsa_mixed, between−person term


64 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 2 of 6.

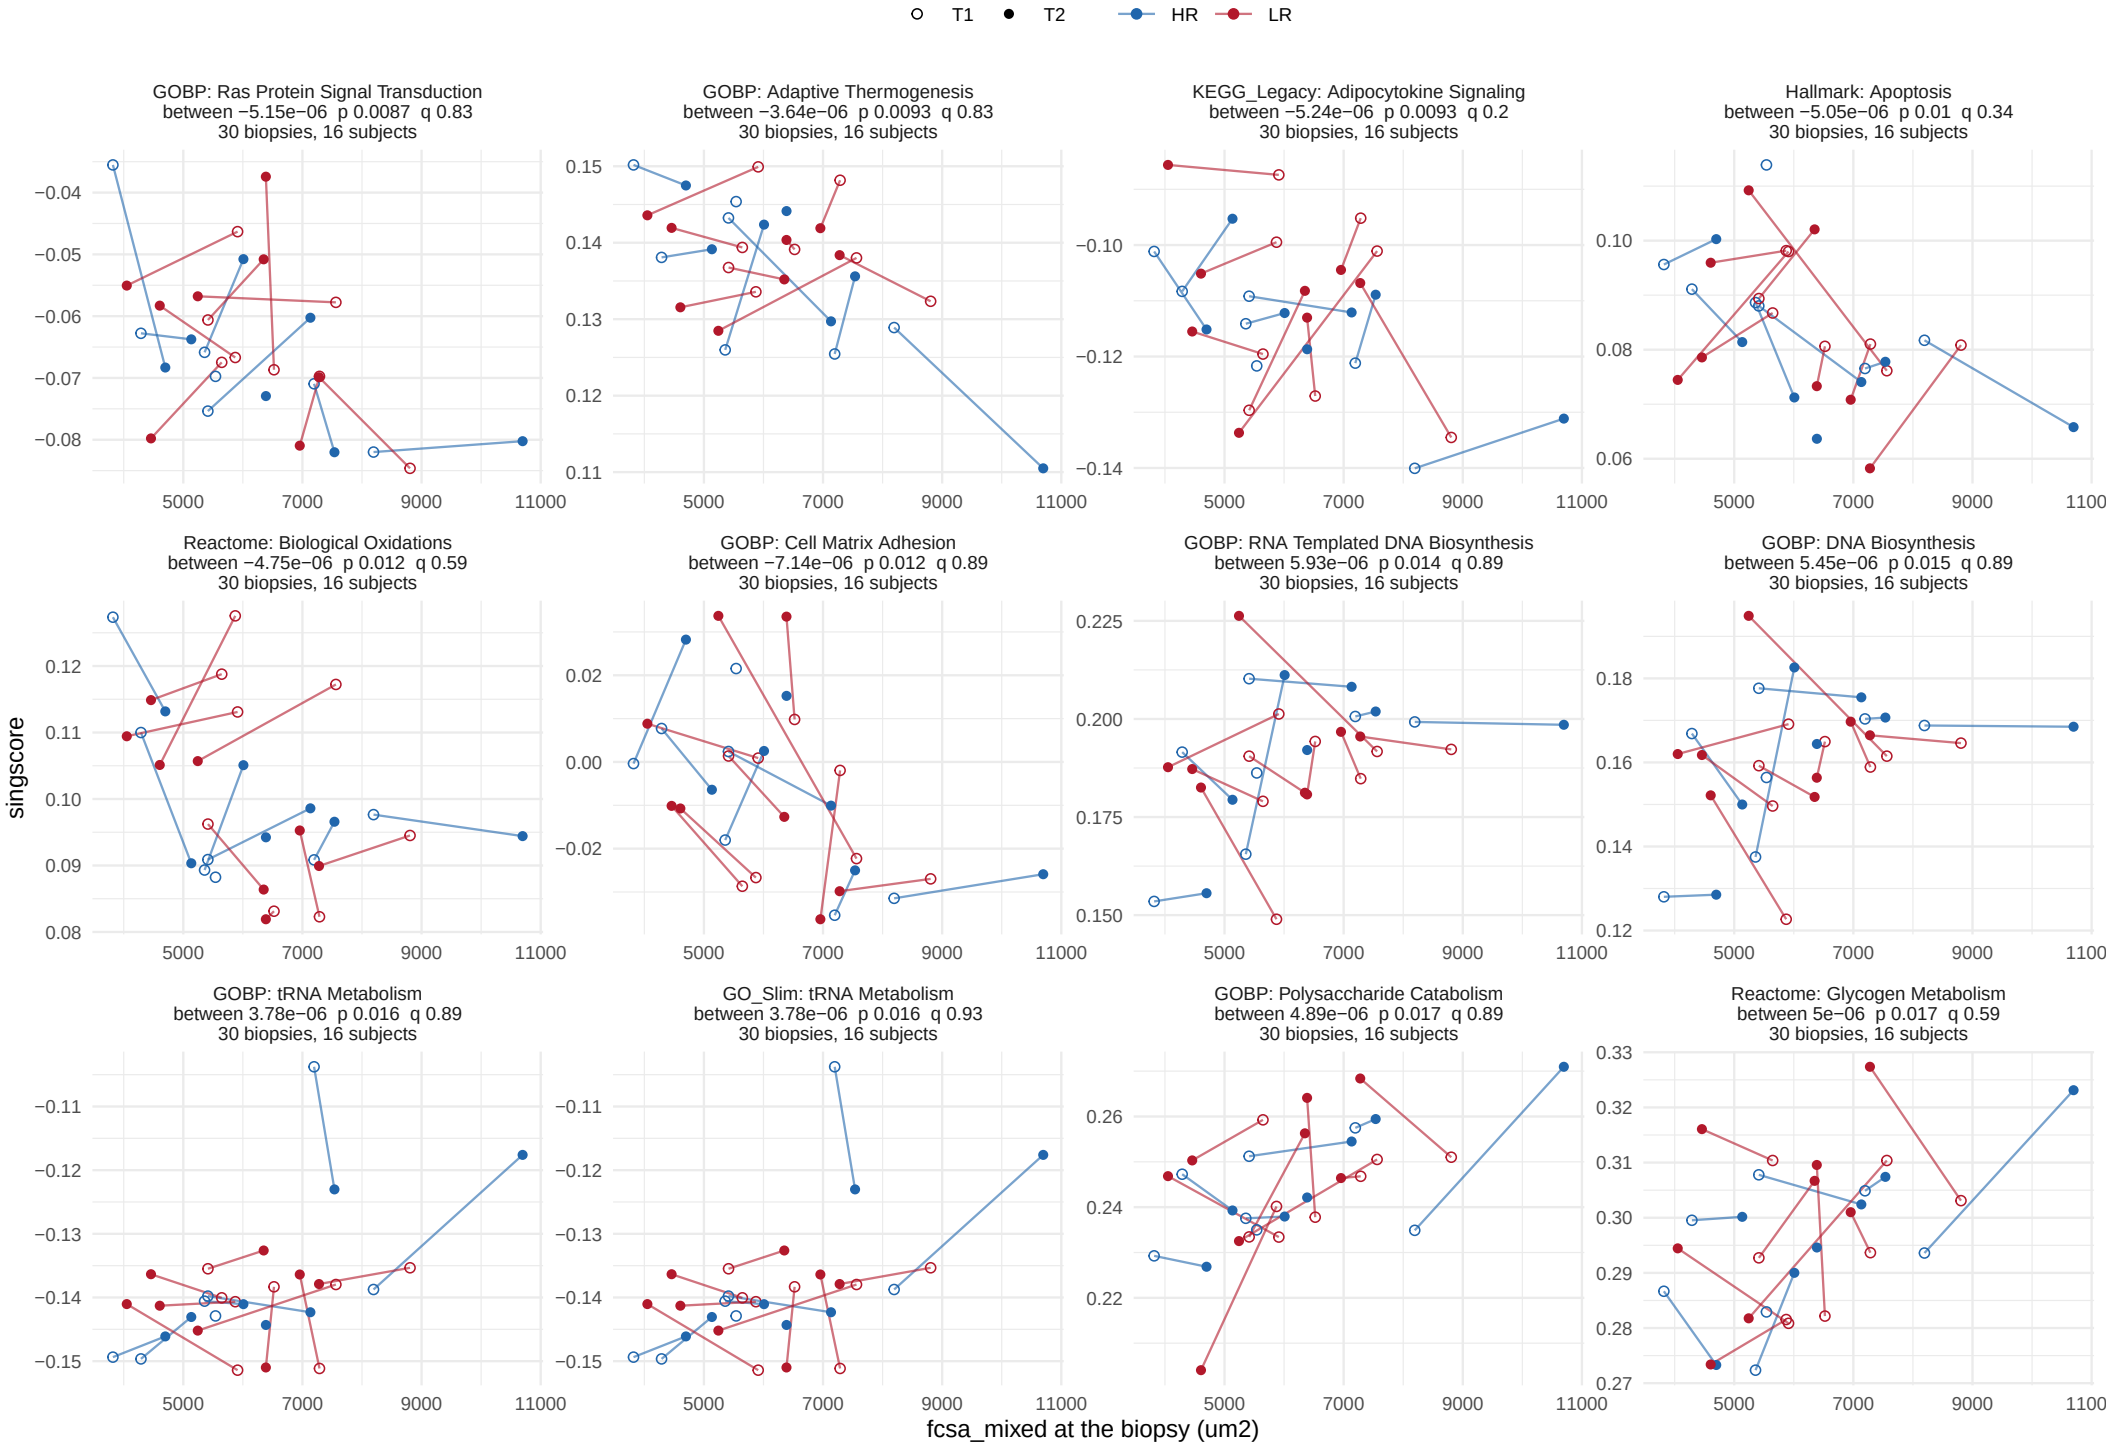


limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

## fcsa_mixed, between−person term


64 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 3 of 6.

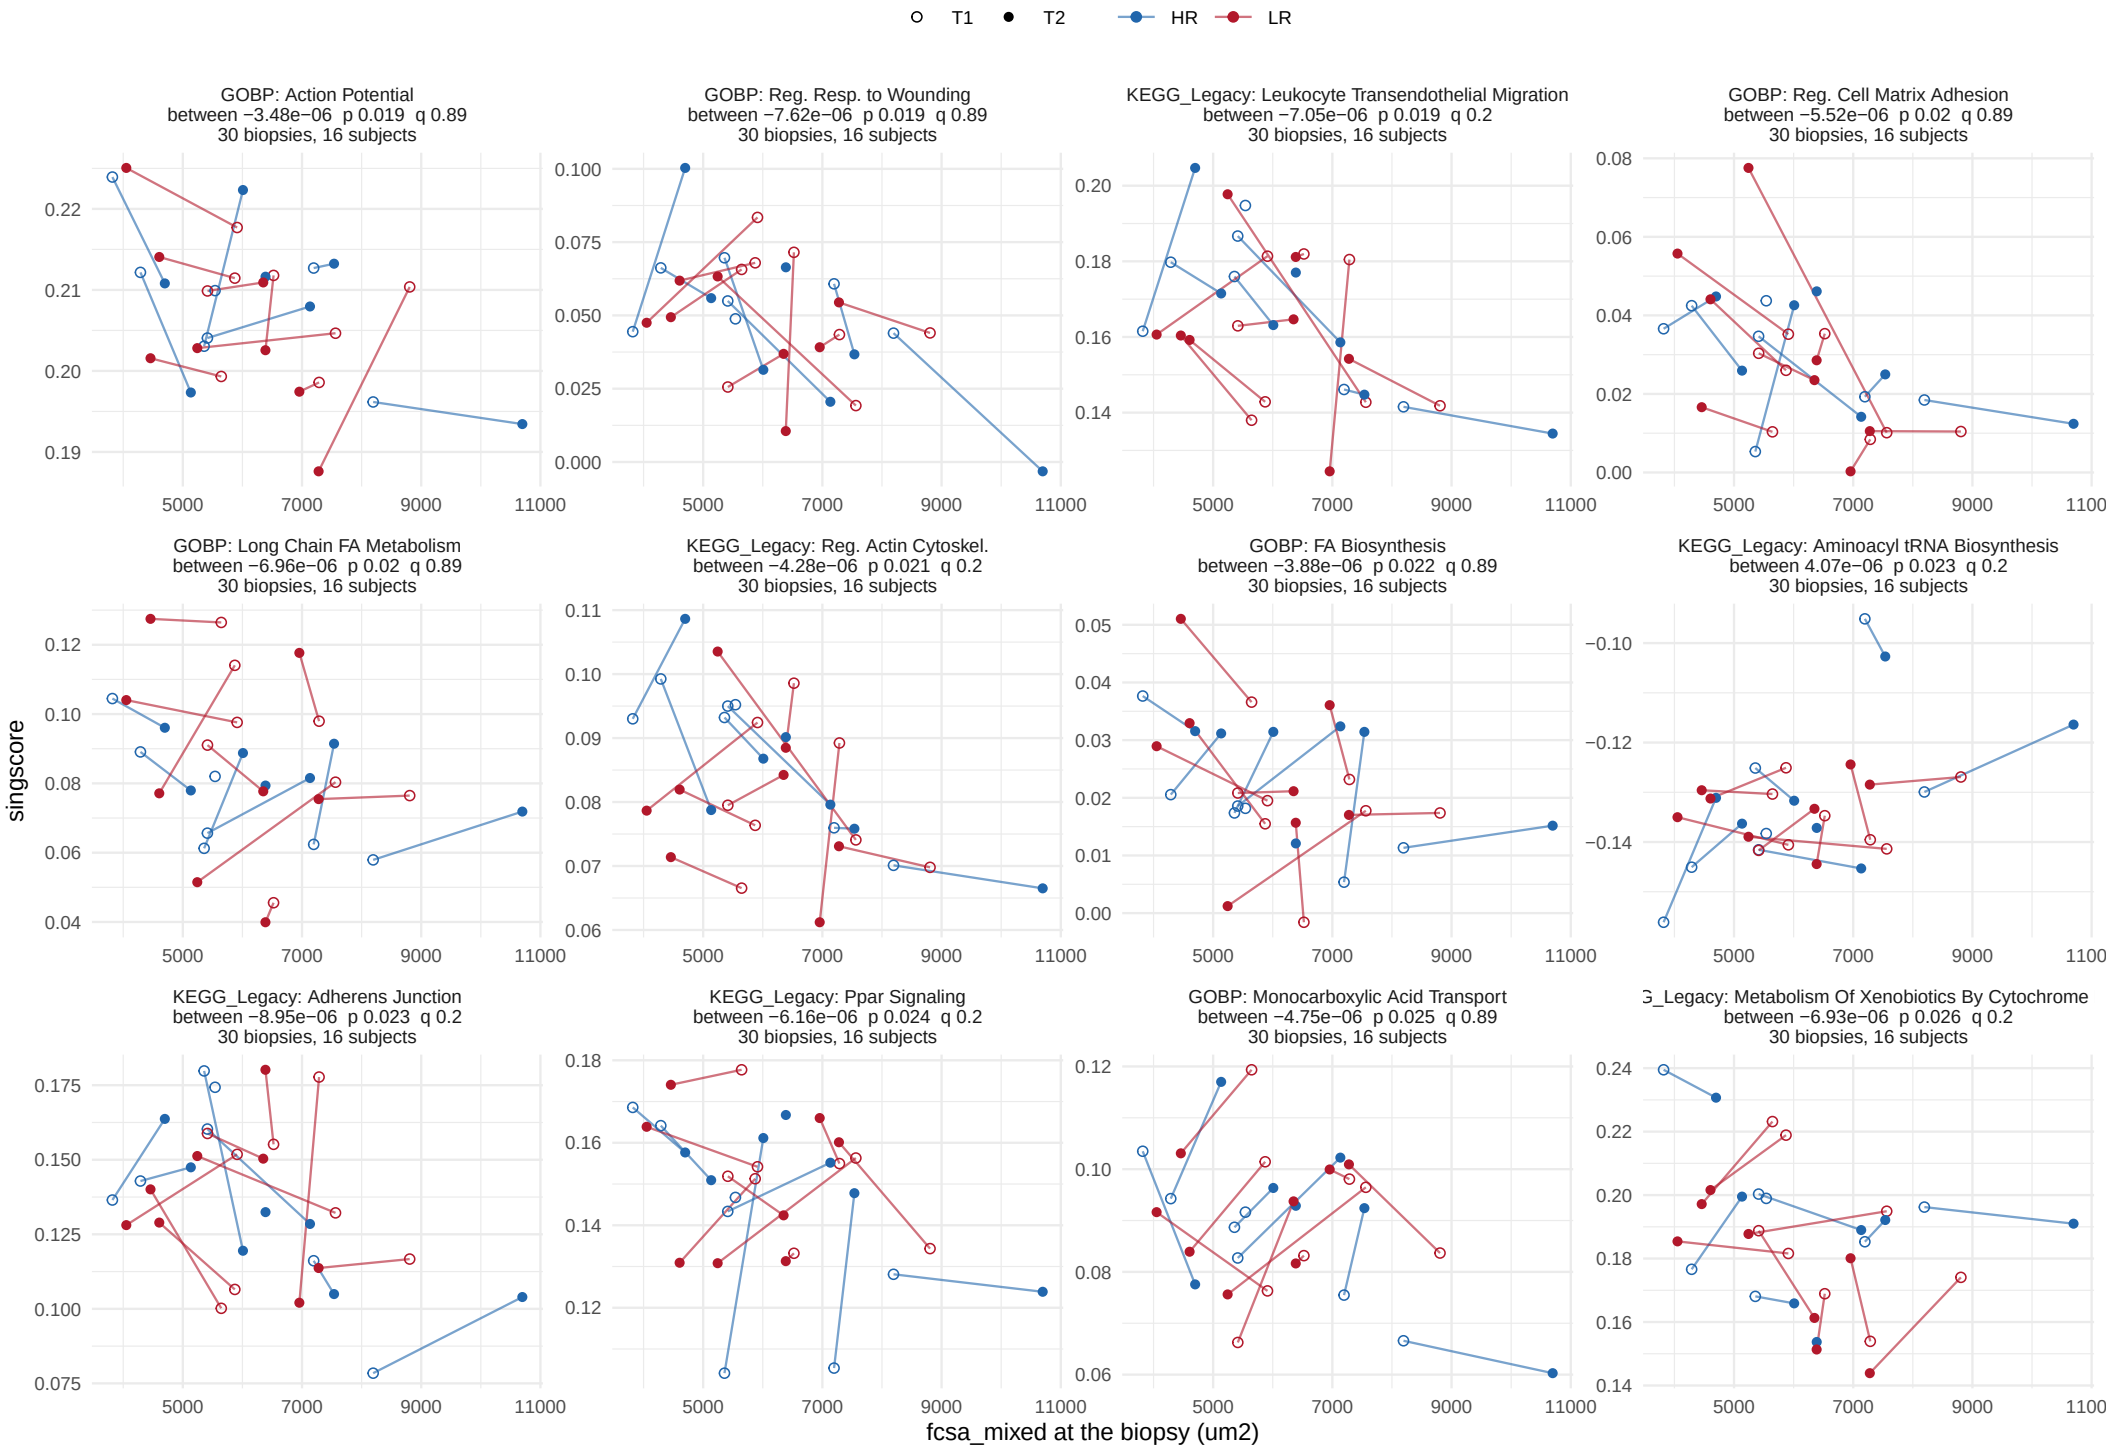


limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

# fcsa_mixed, between−person term


64 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 4 of 6.

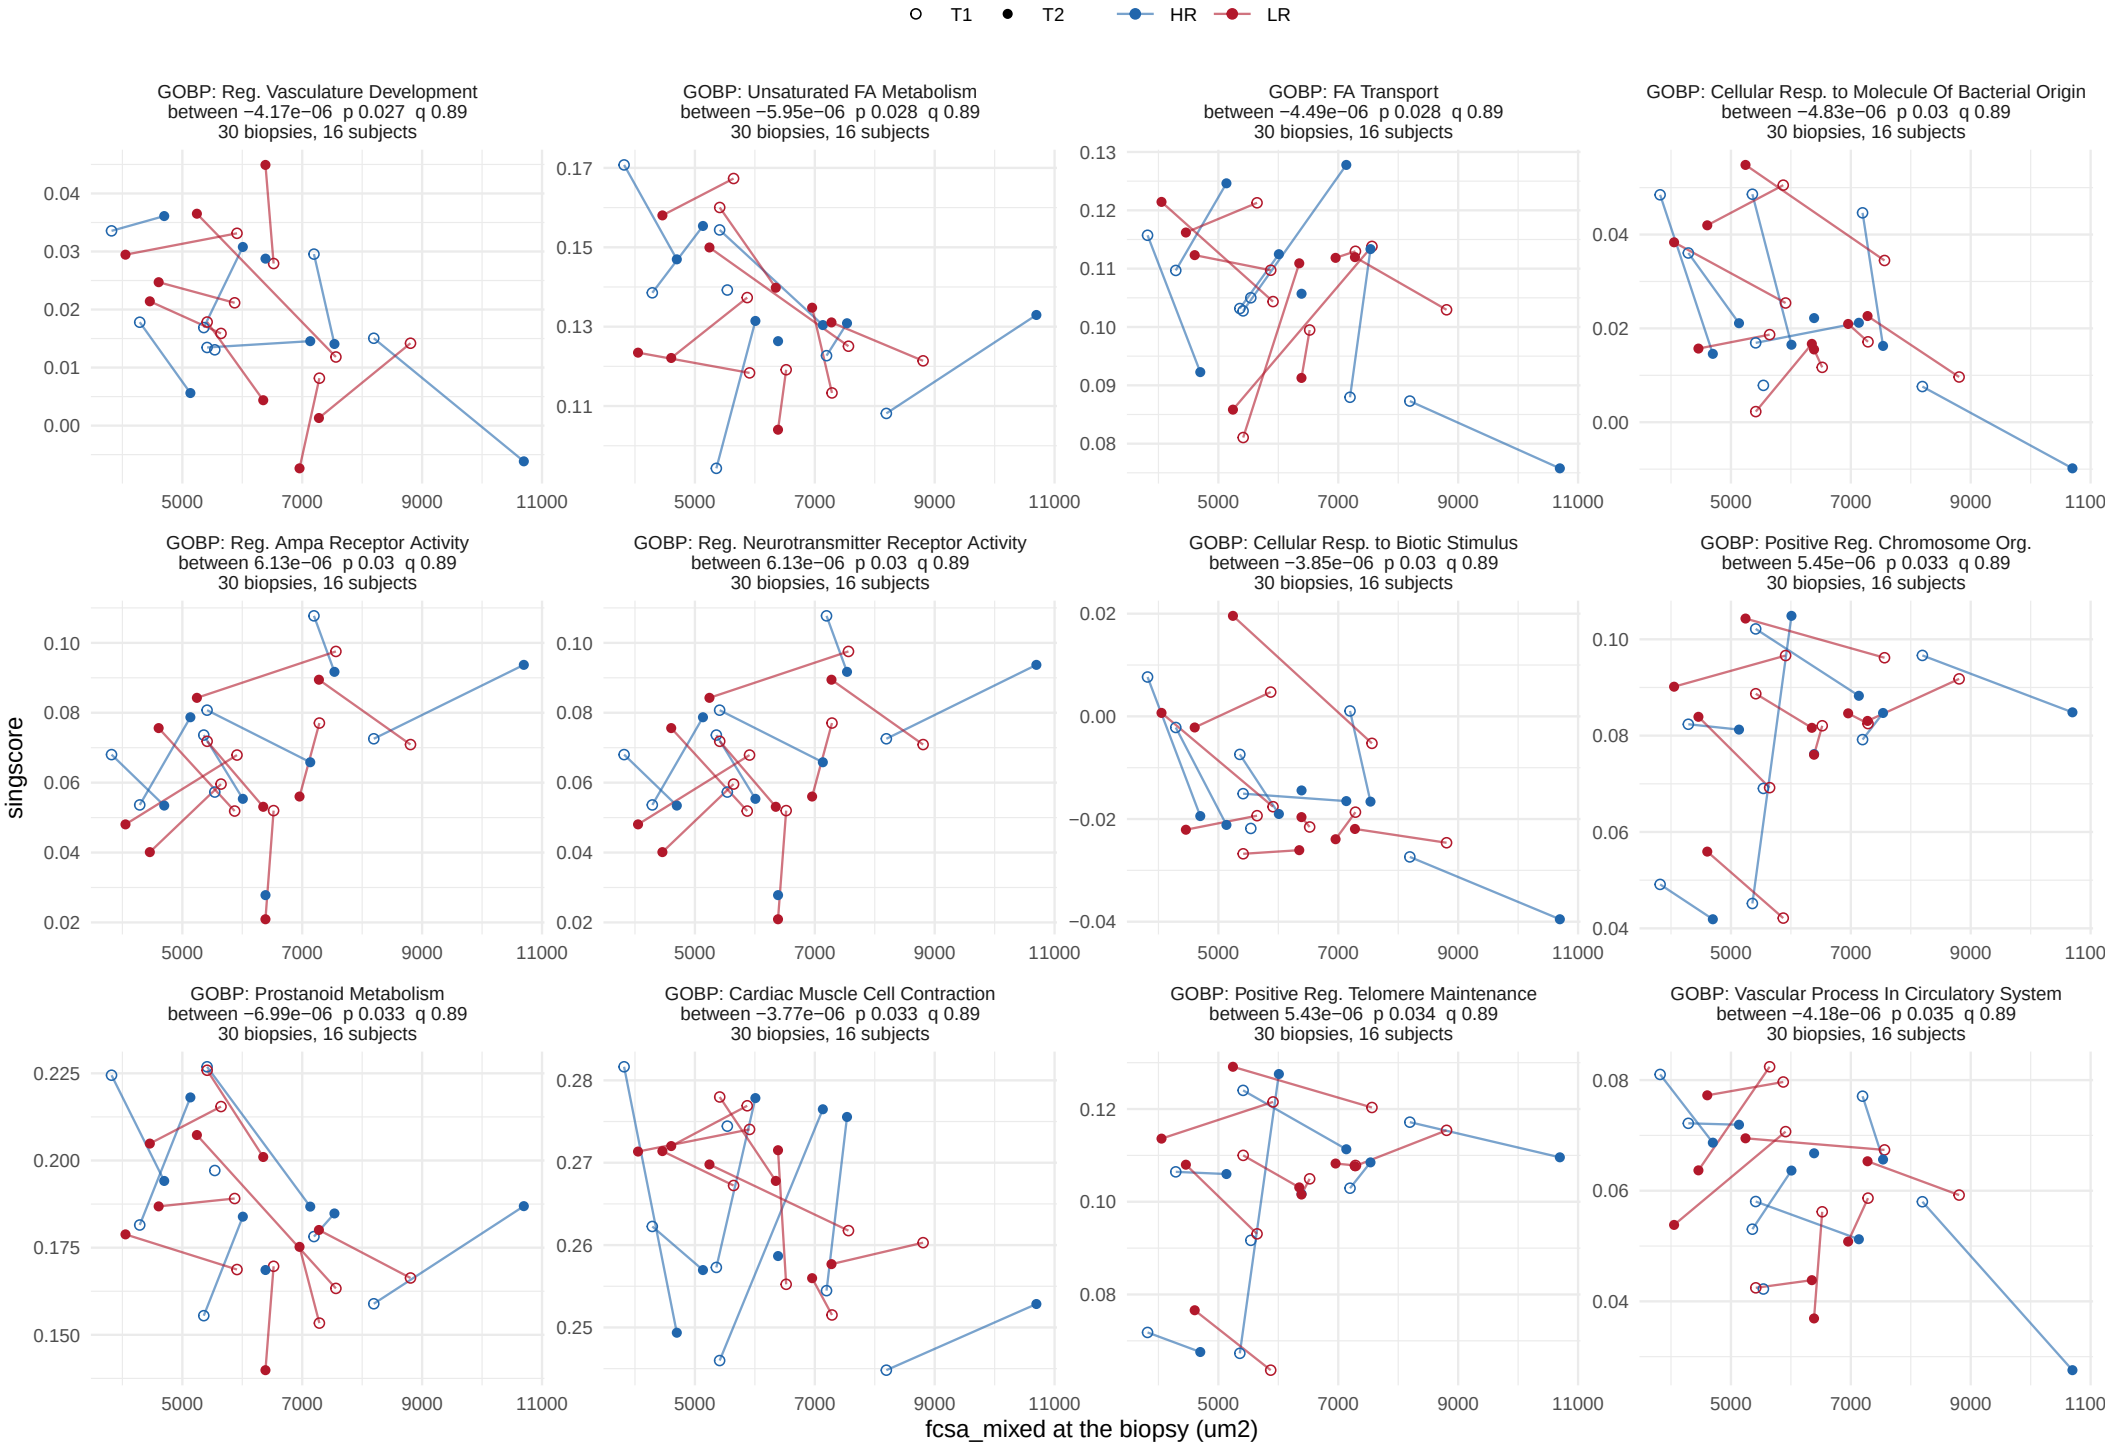


limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

## fcsa_mixed, between−person term


64 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 5 of 6.

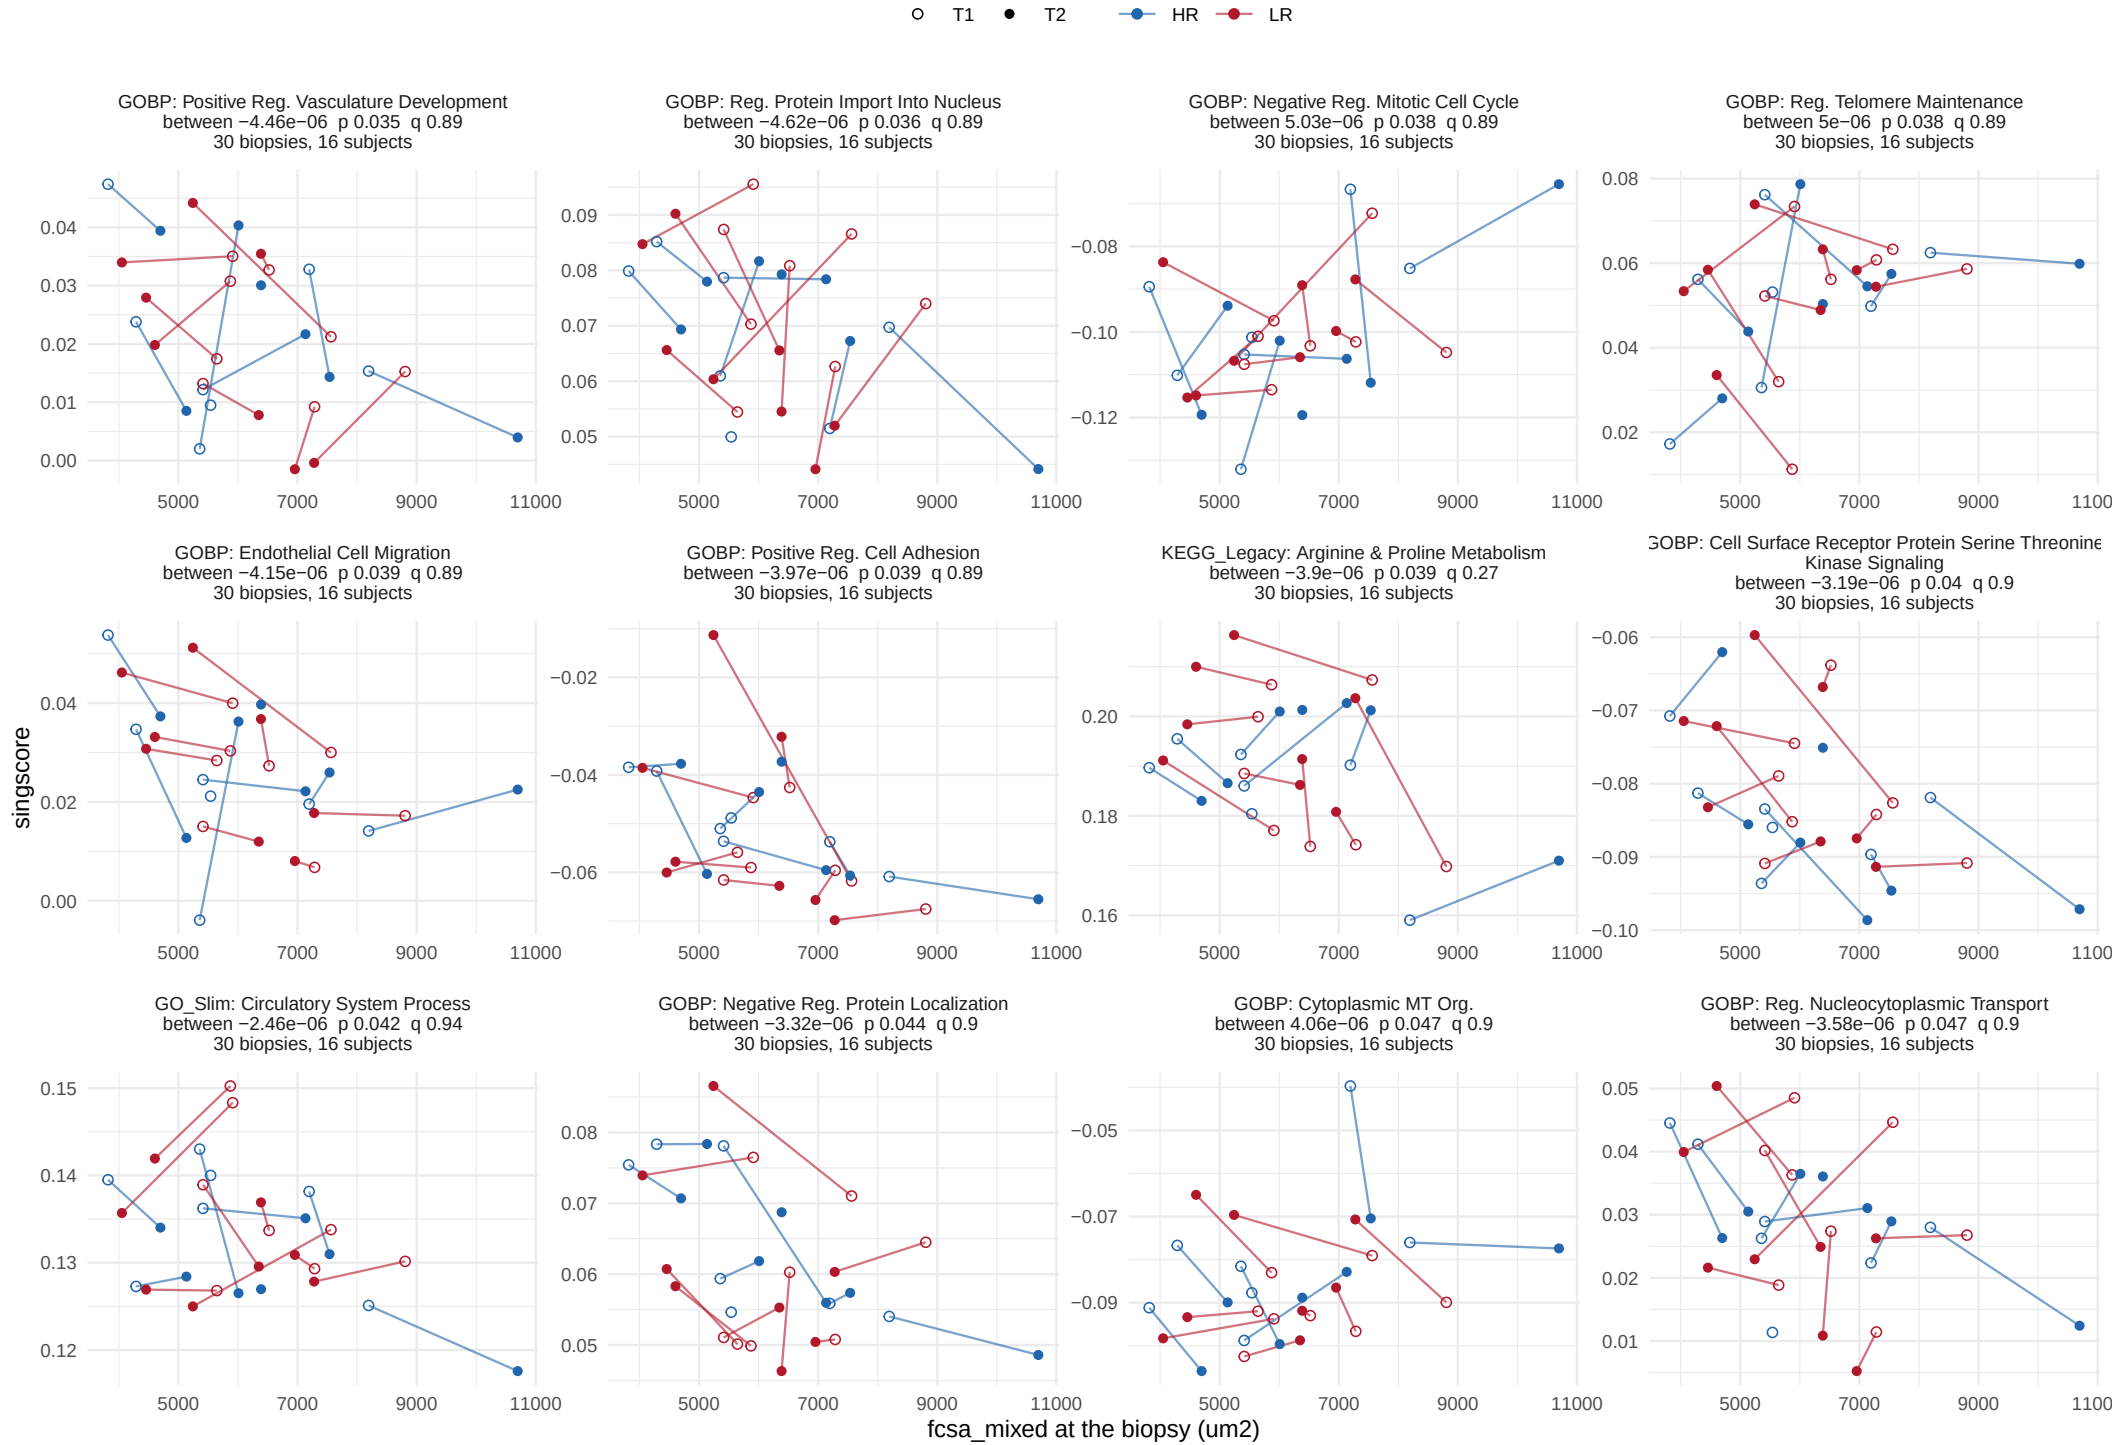


limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

## fcsa_mixed, between−person term


64 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 6 of 6.

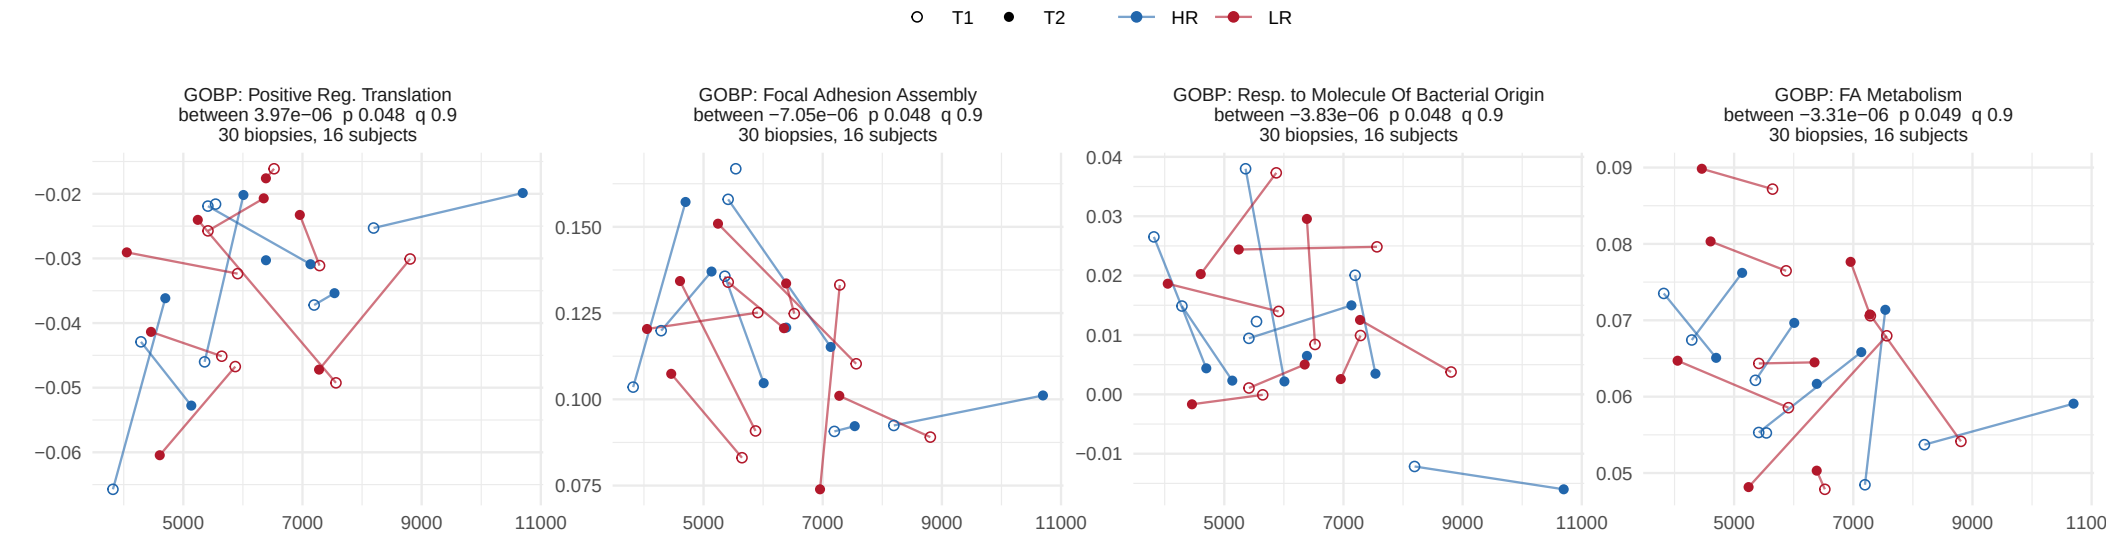


limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

## fcsa_type1, within−person term


56 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 1 of 5.

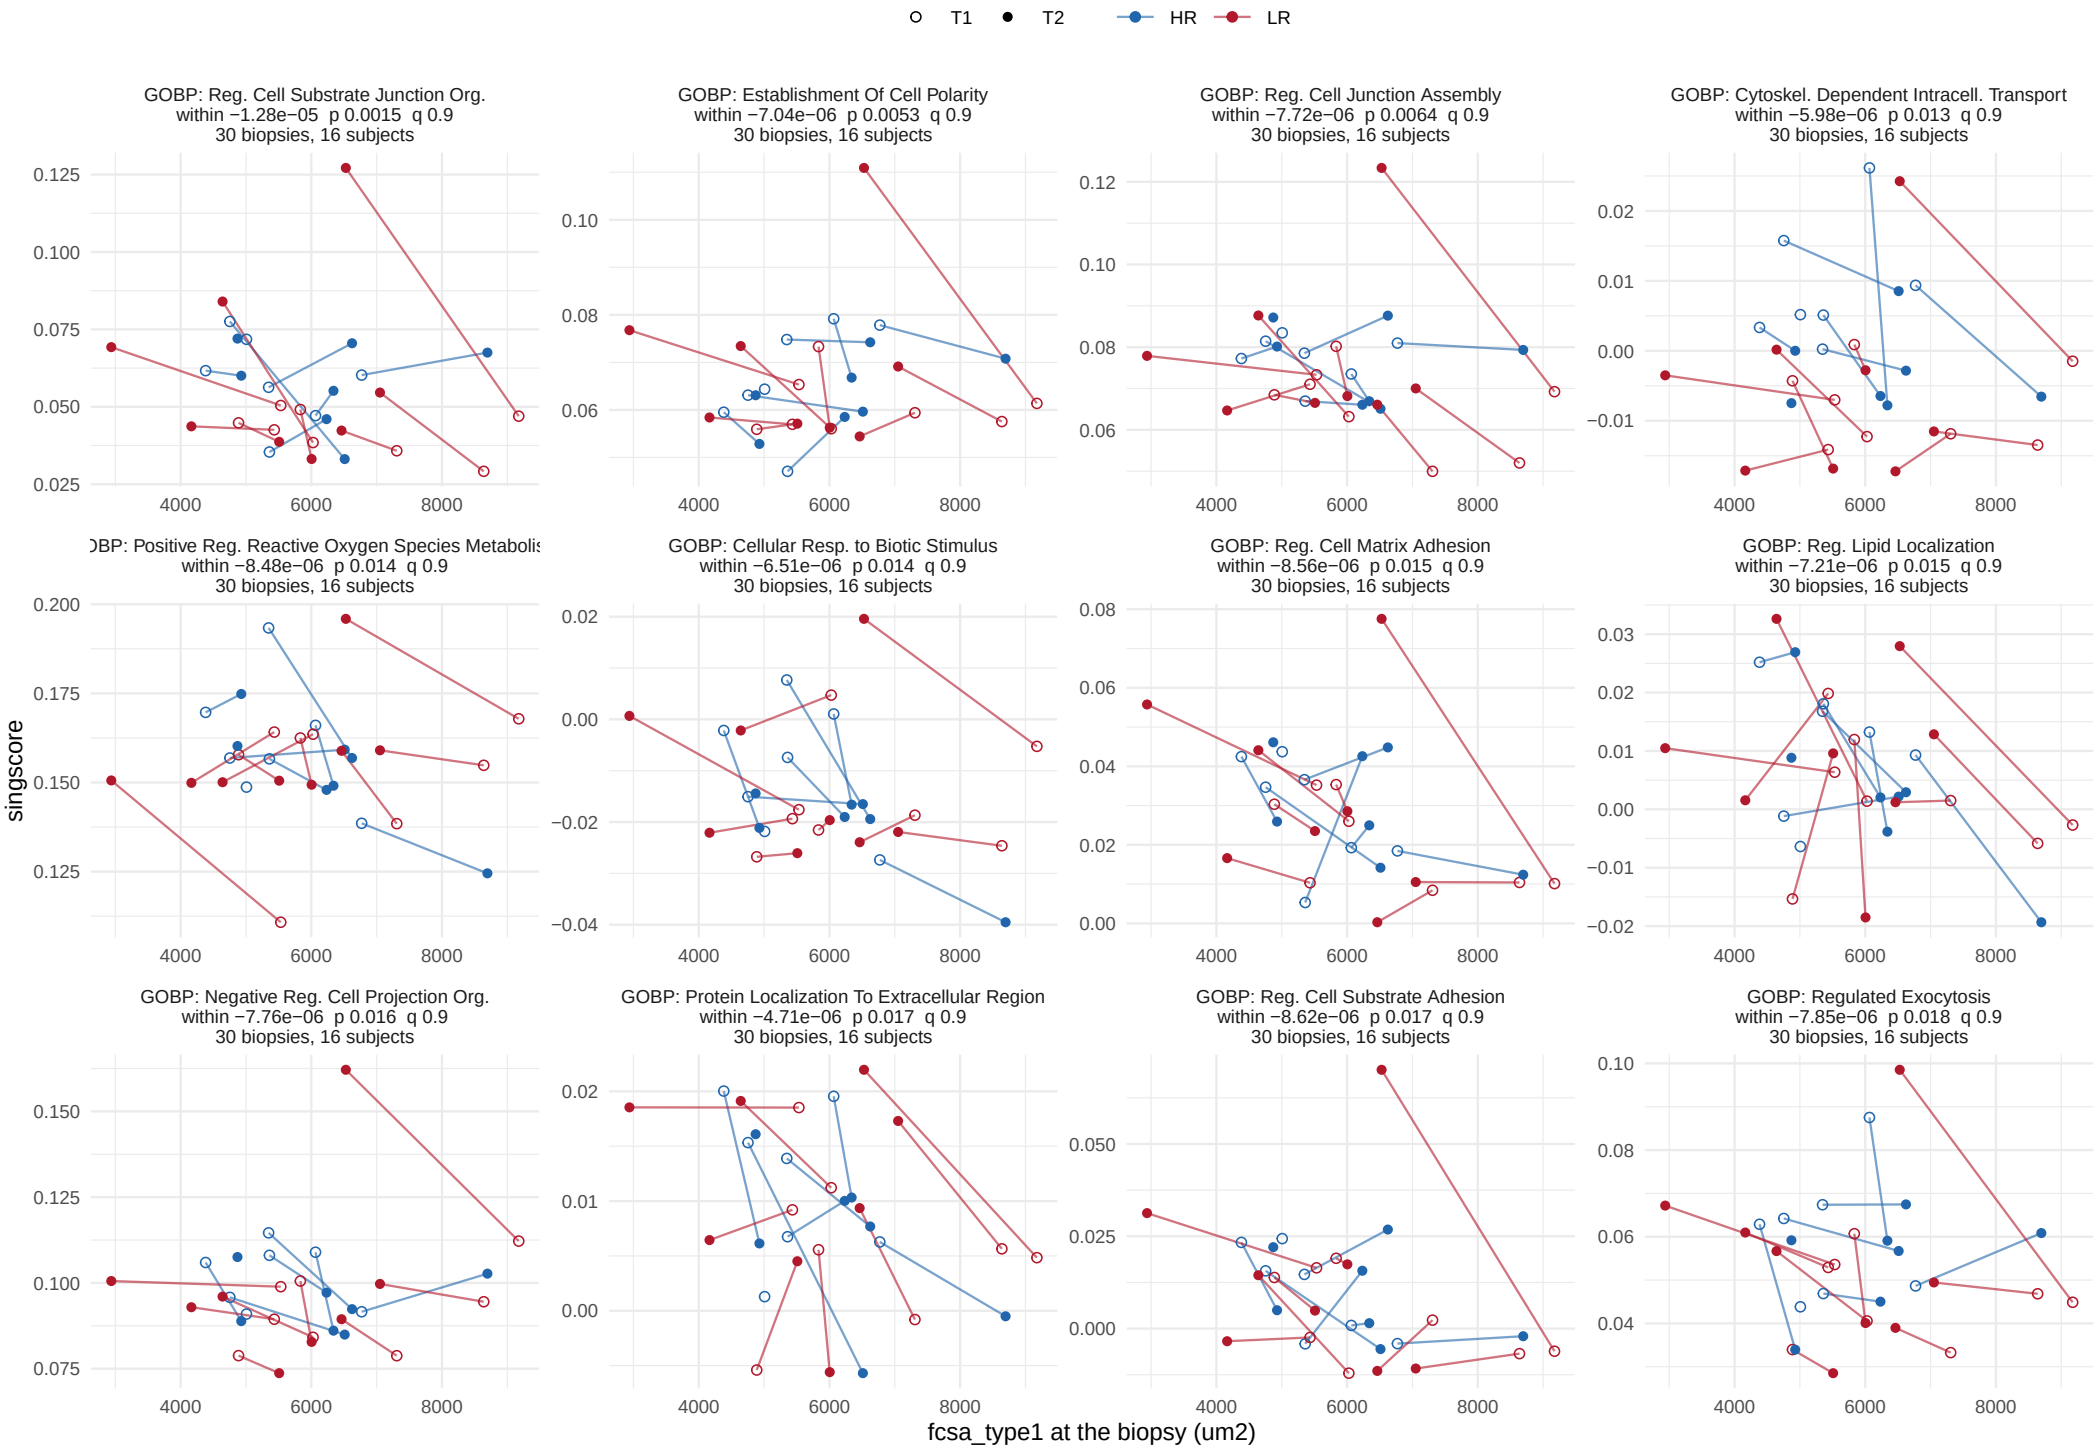


limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

## fcsa_type1, within−person term


56 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 2 of 5.

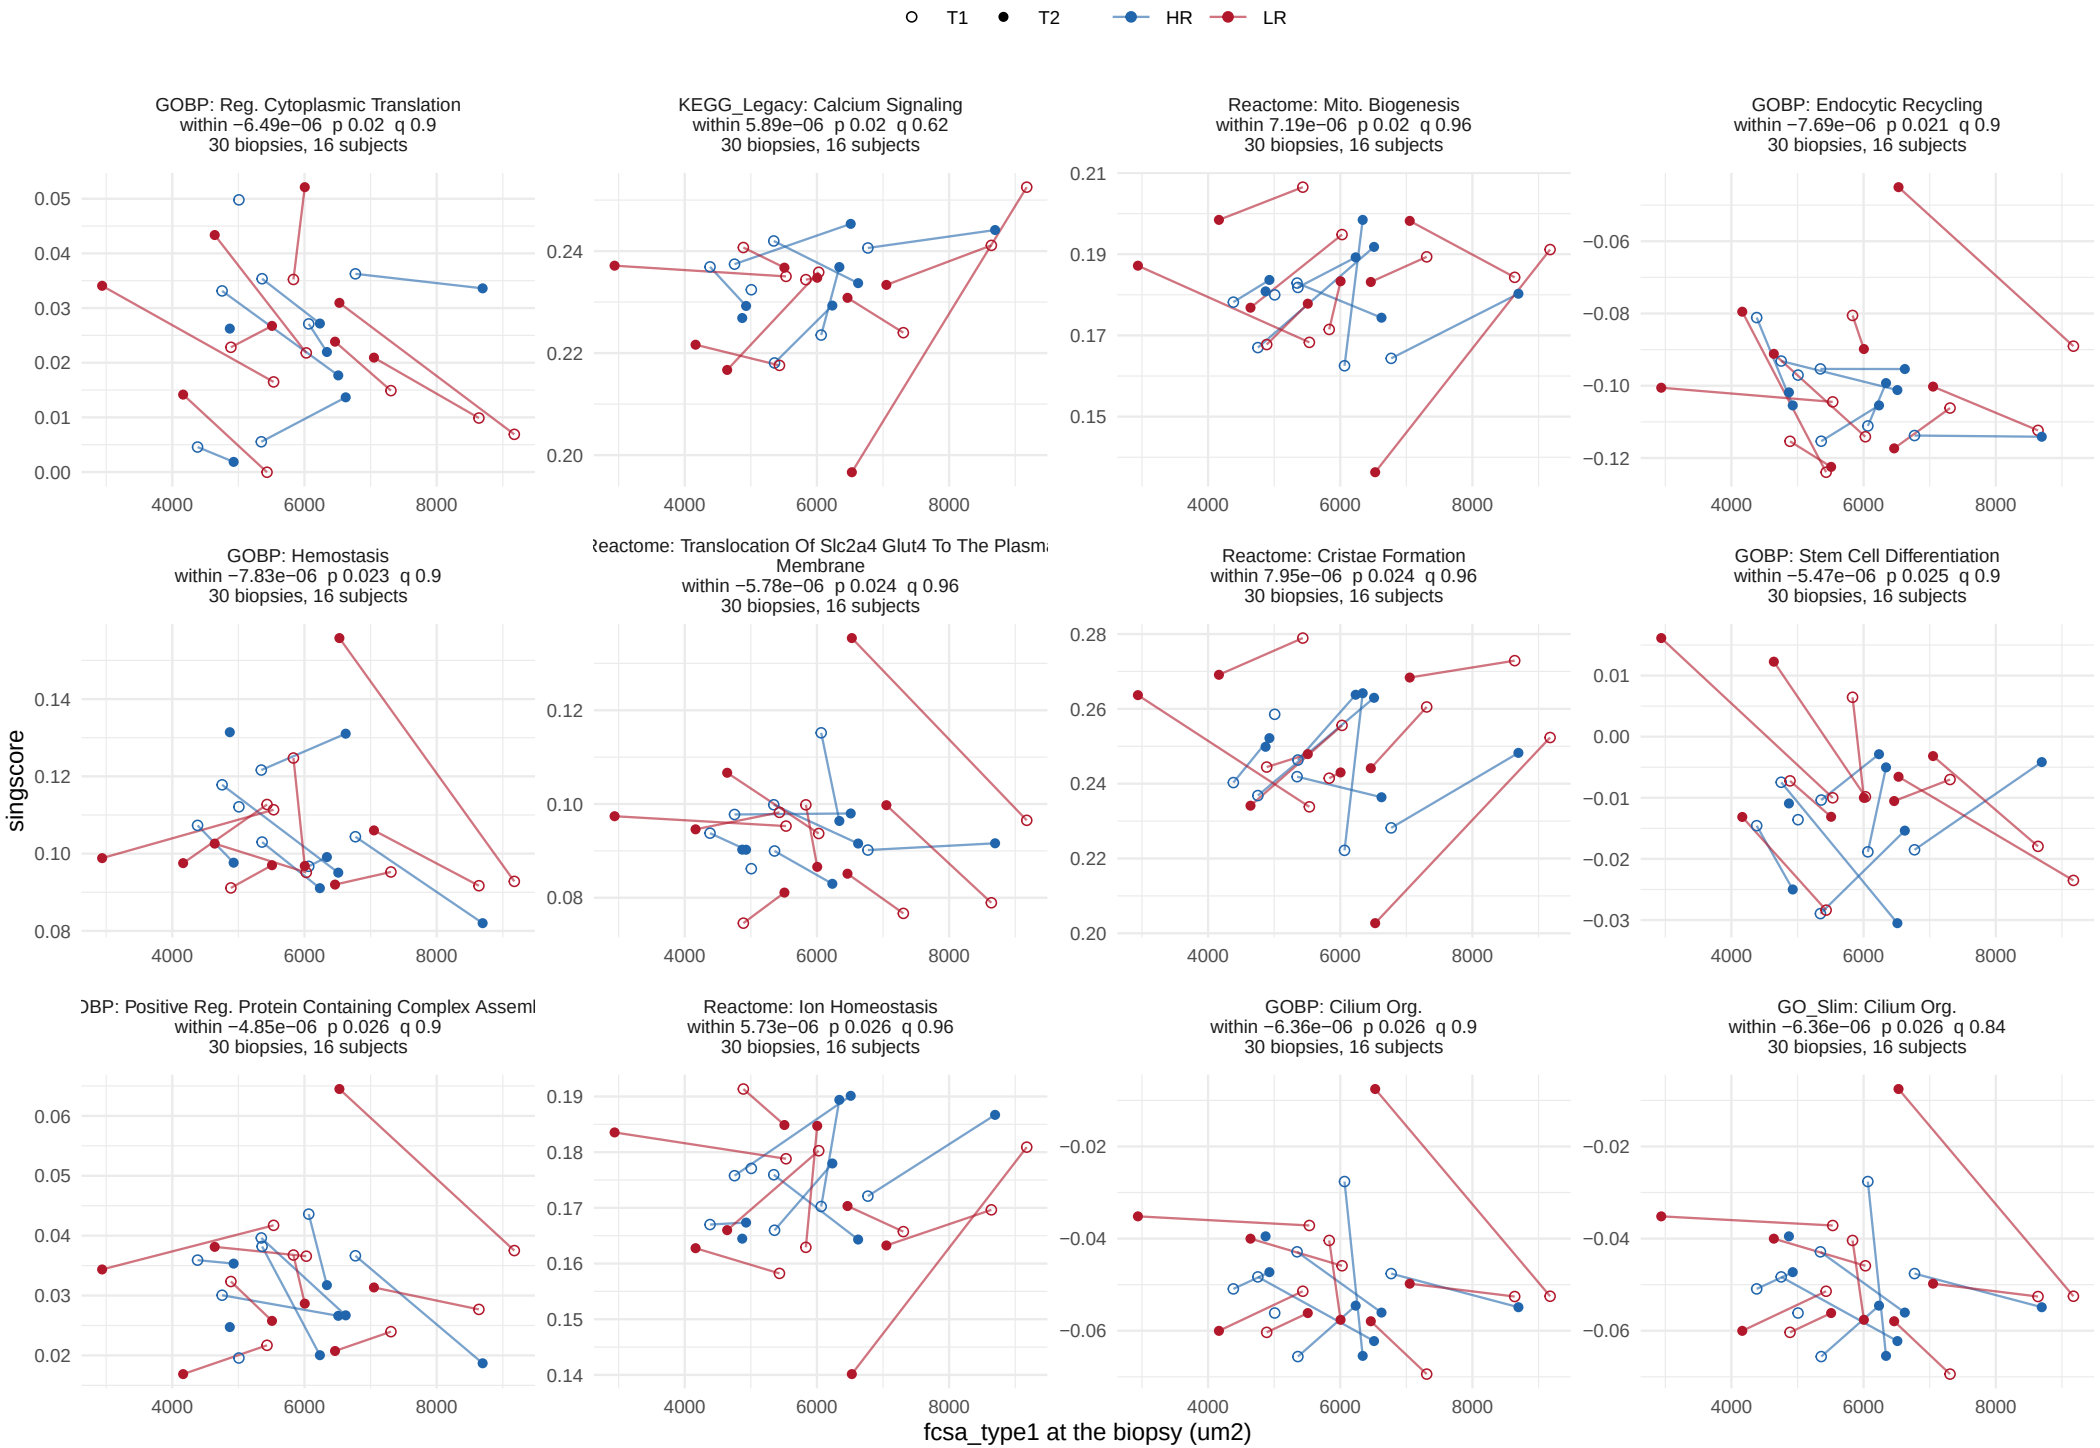


limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

## fcsa_type1, within−person term


56 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 3 of 5.

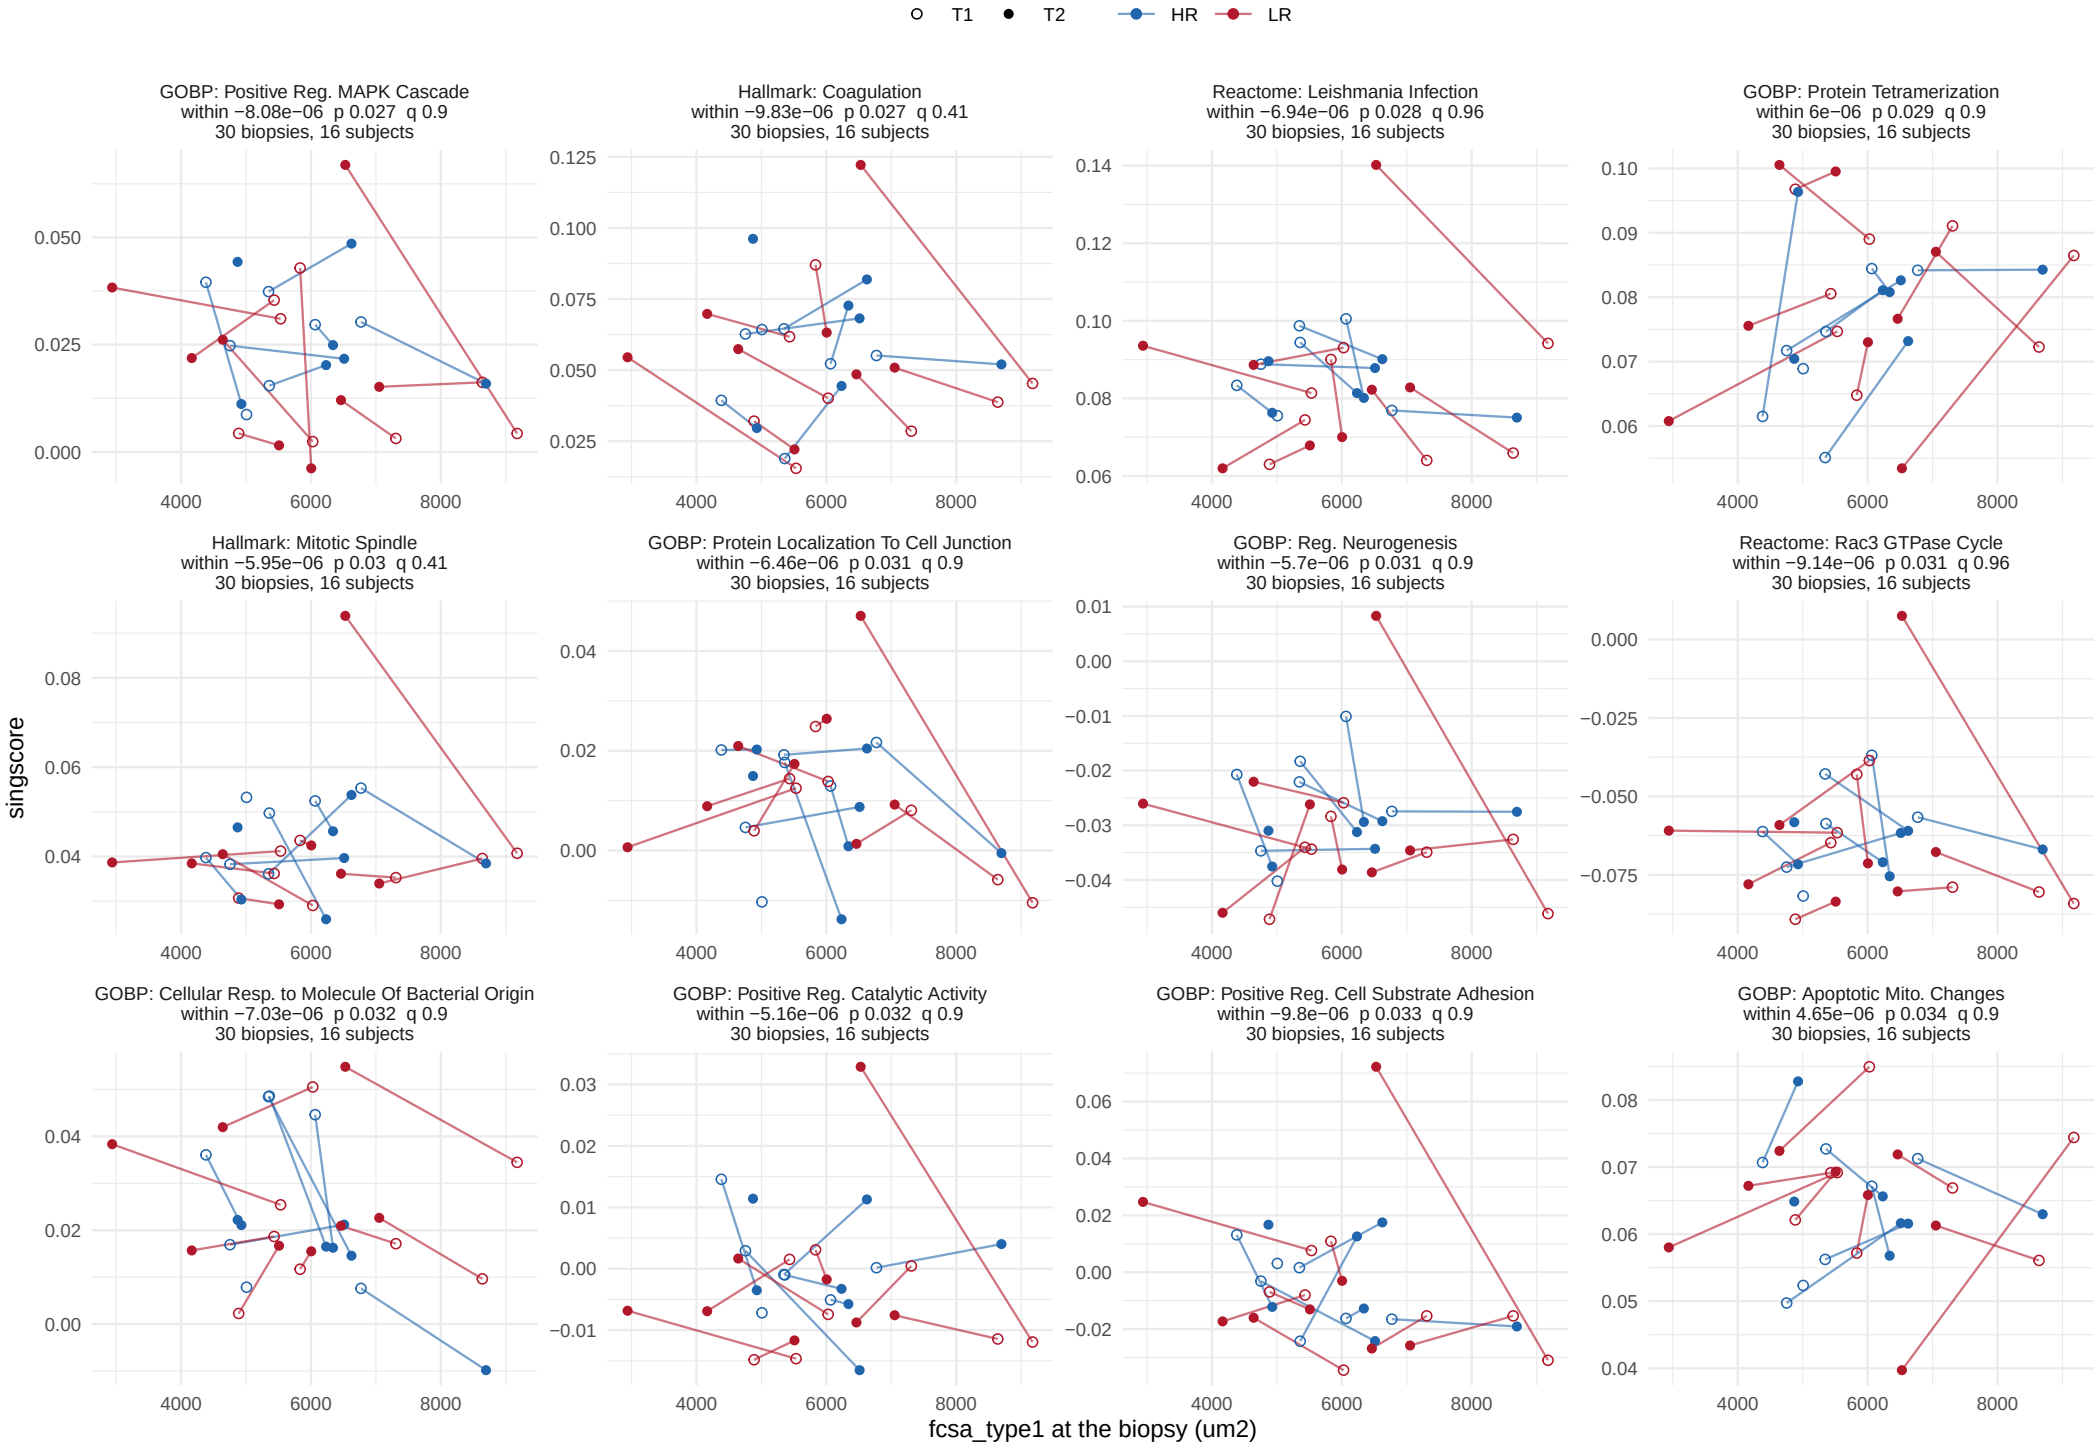


limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

## fcsa_type1, within−person term


56 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 4 of 5.

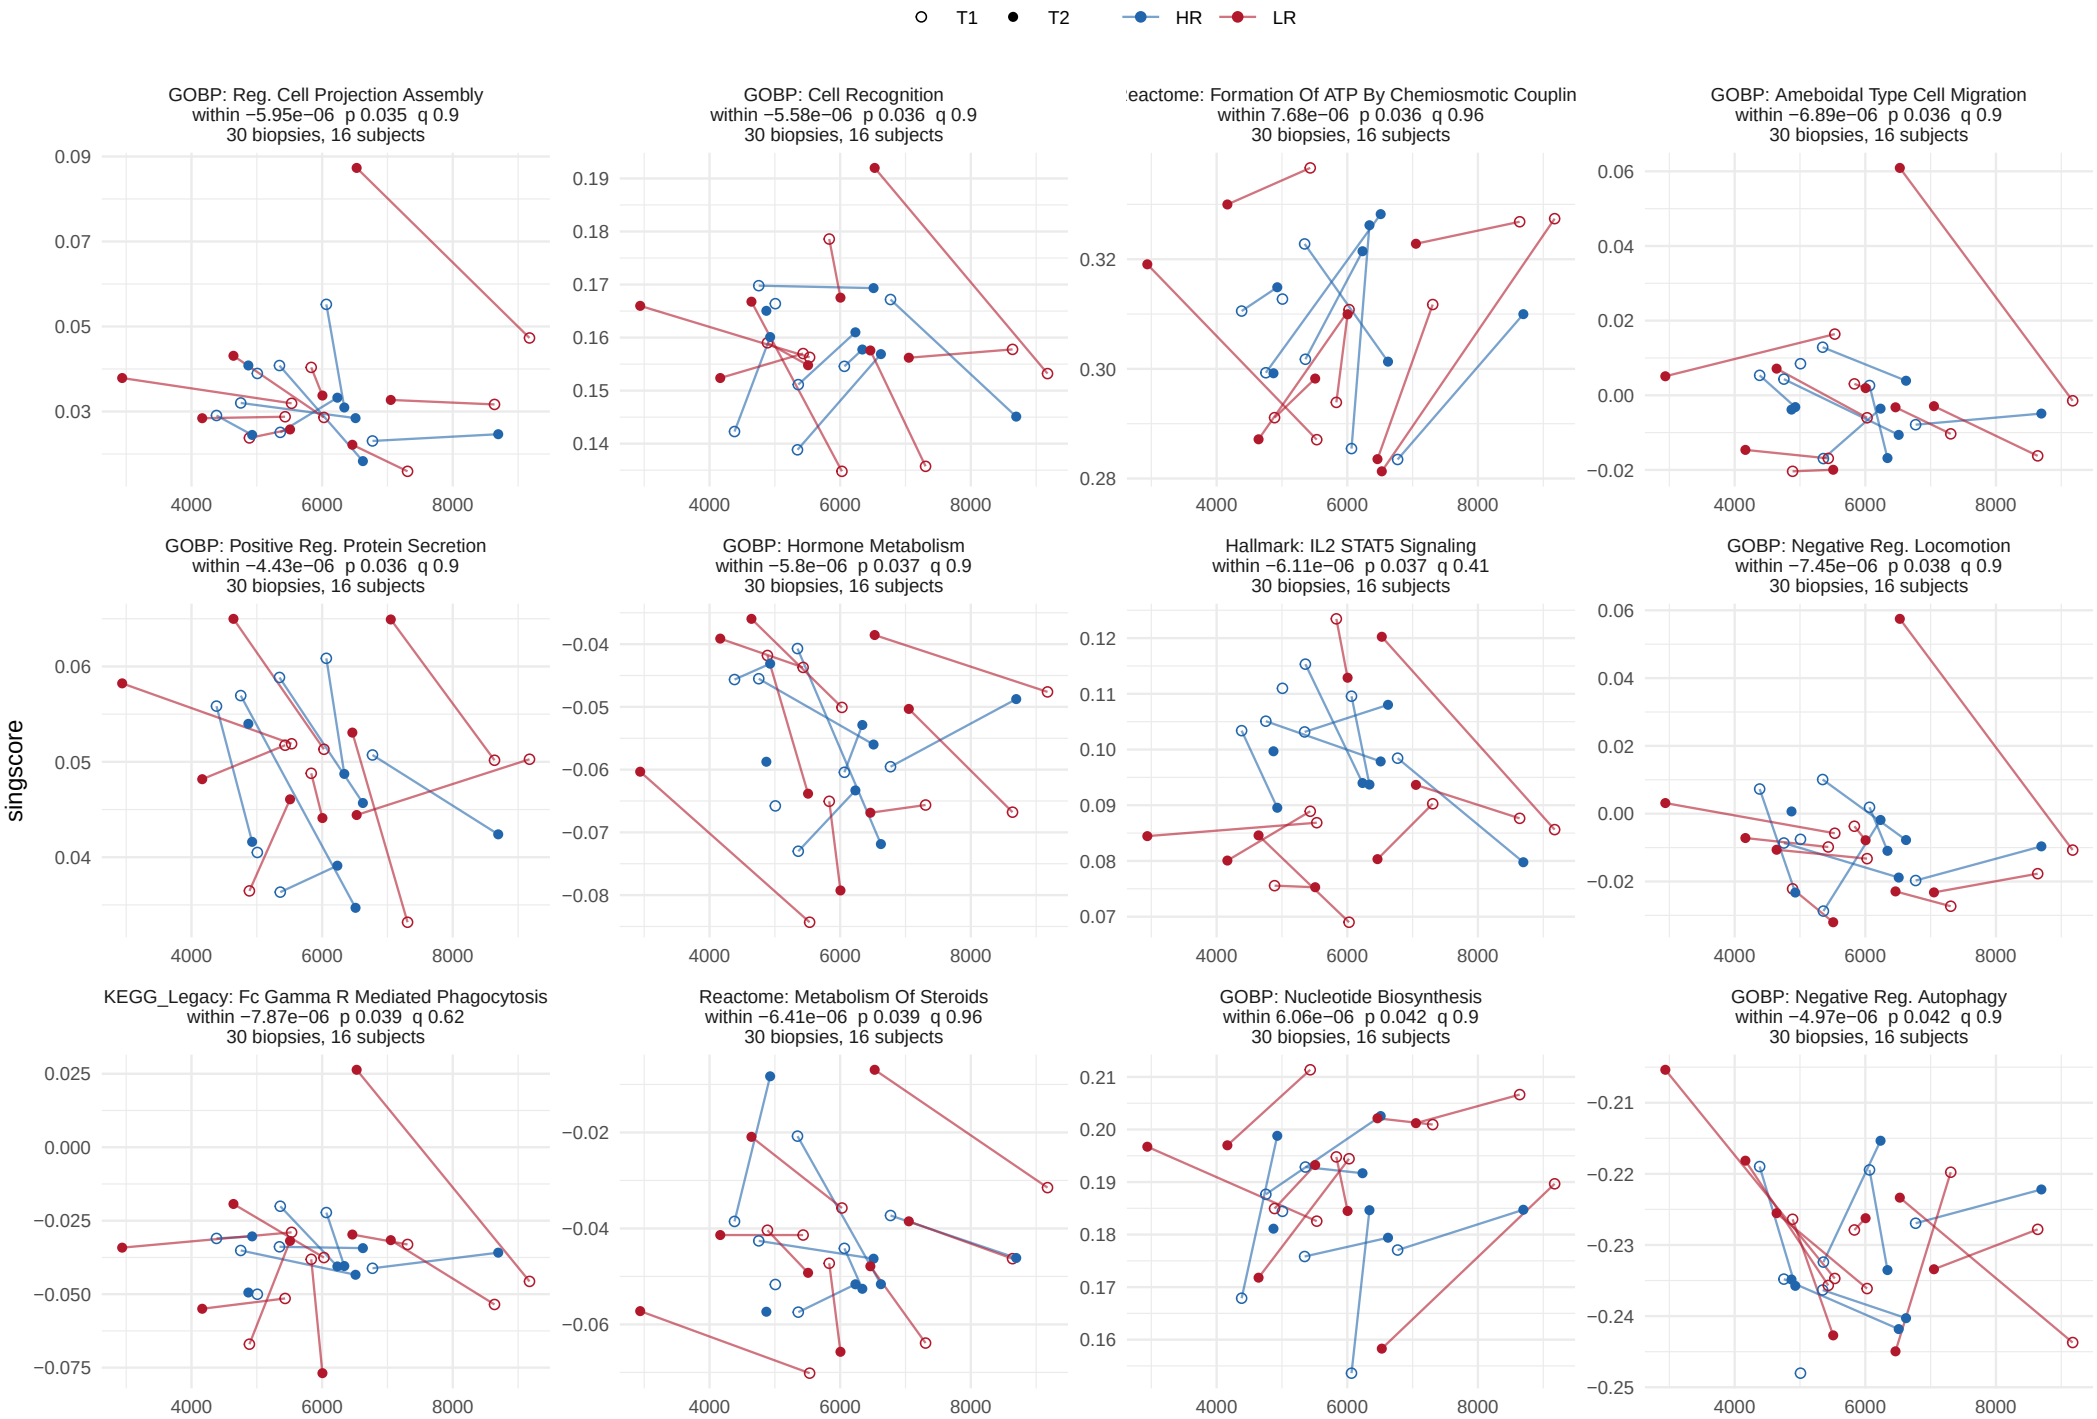


limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

## fcsa_type1, within−person term


56 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 5 of 5.

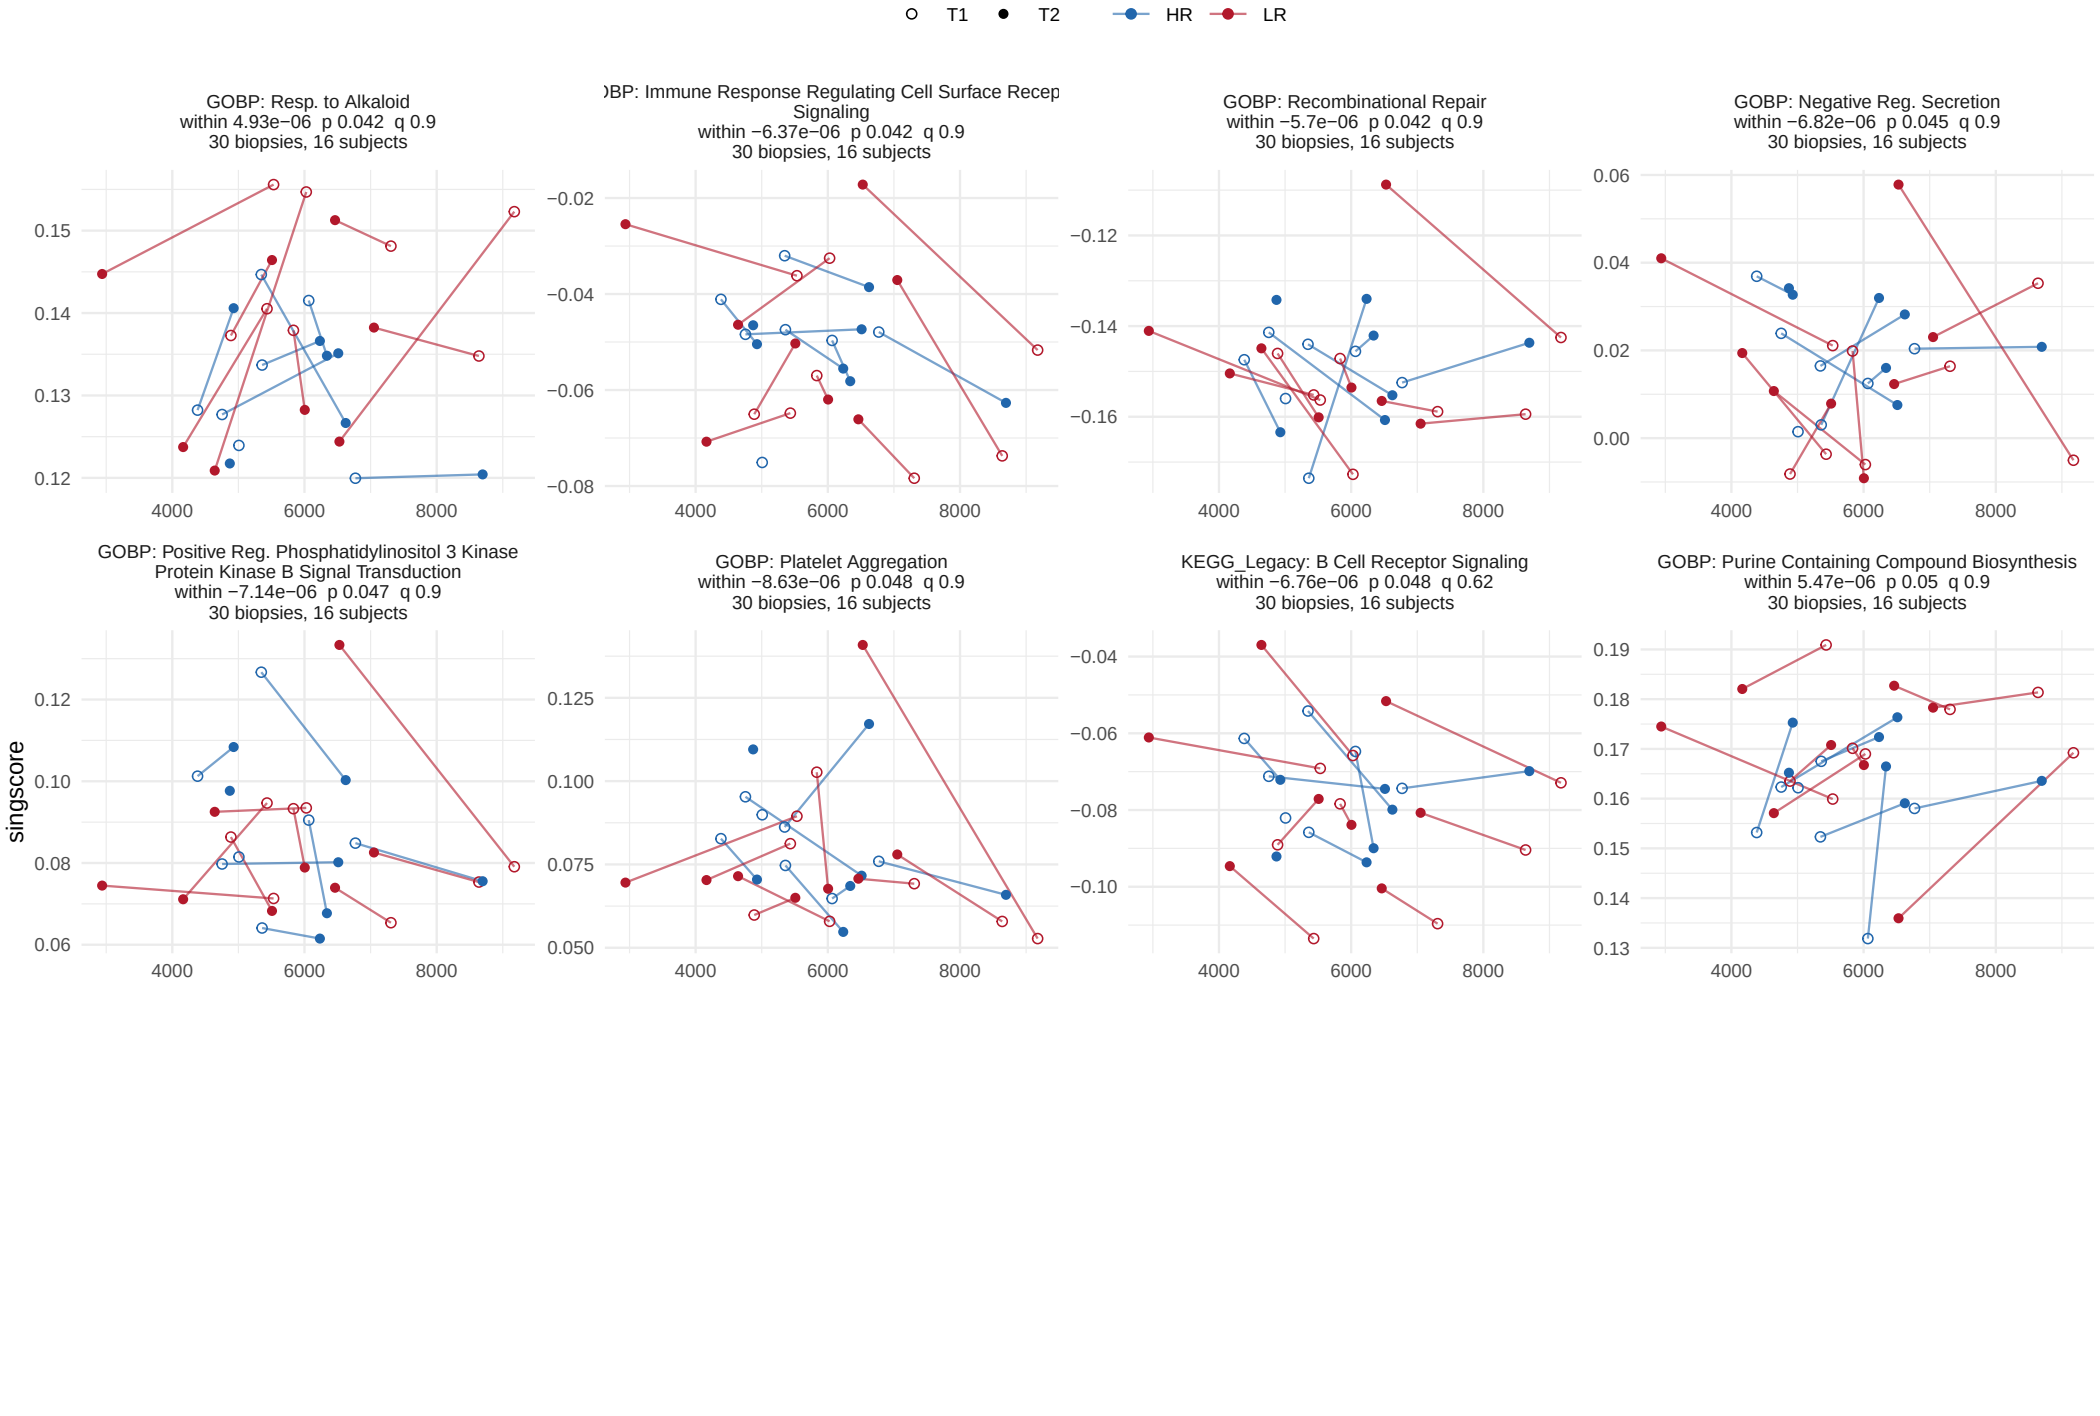


limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

## fcsa_type1, between−person term


122 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 1 of 11.

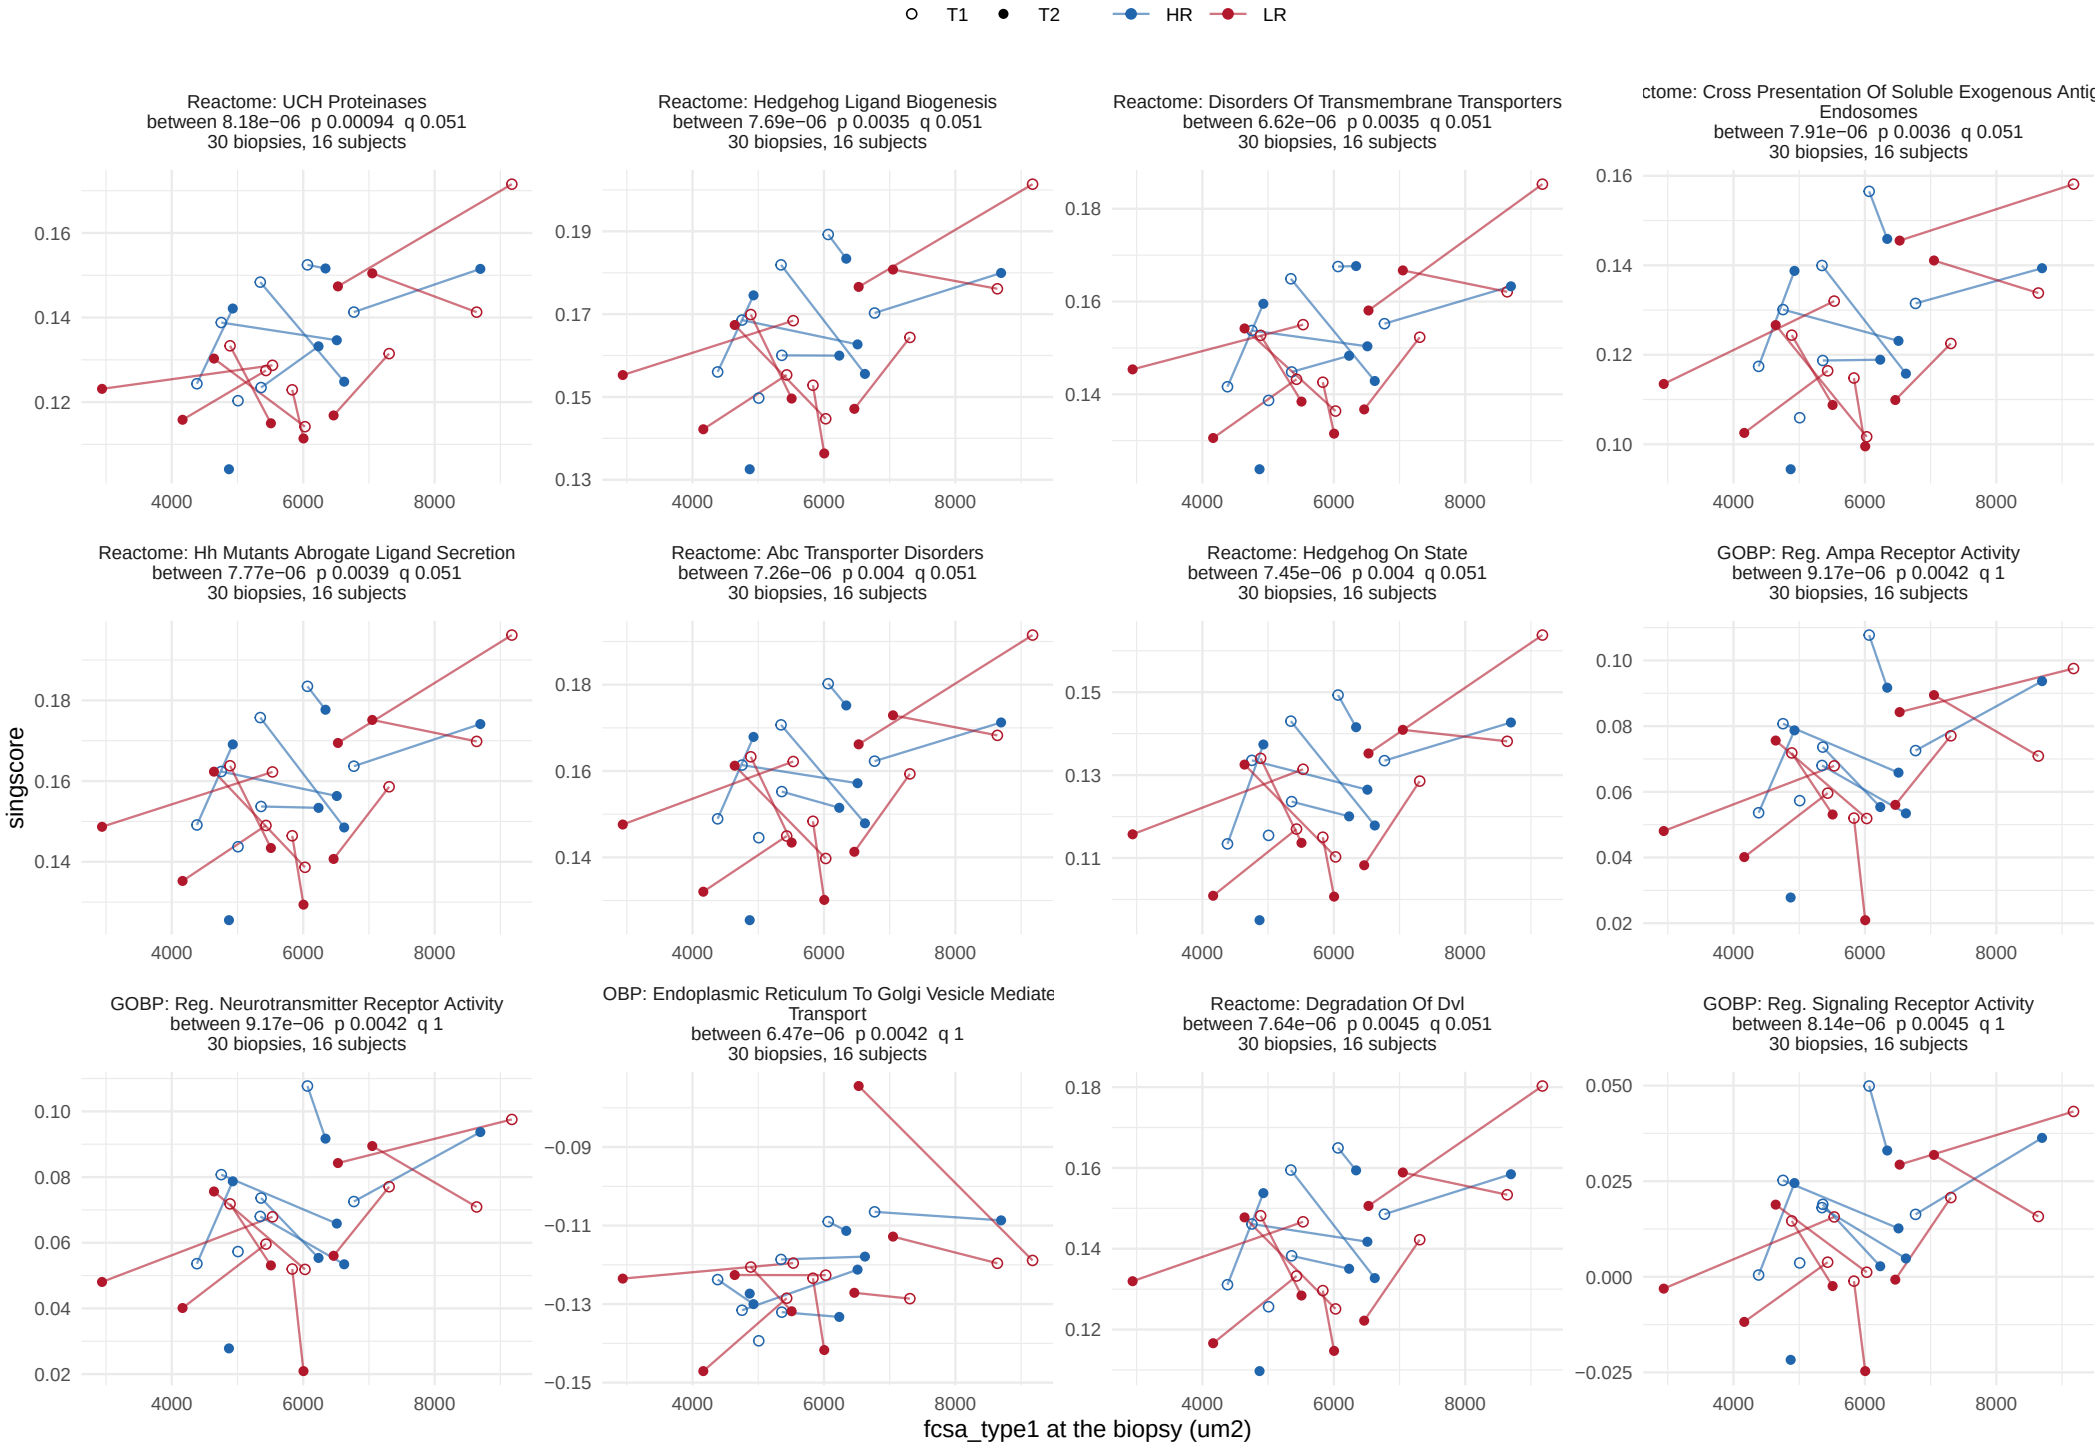


limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

## fcsa_type1, between−person term


122 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 2 of 11.

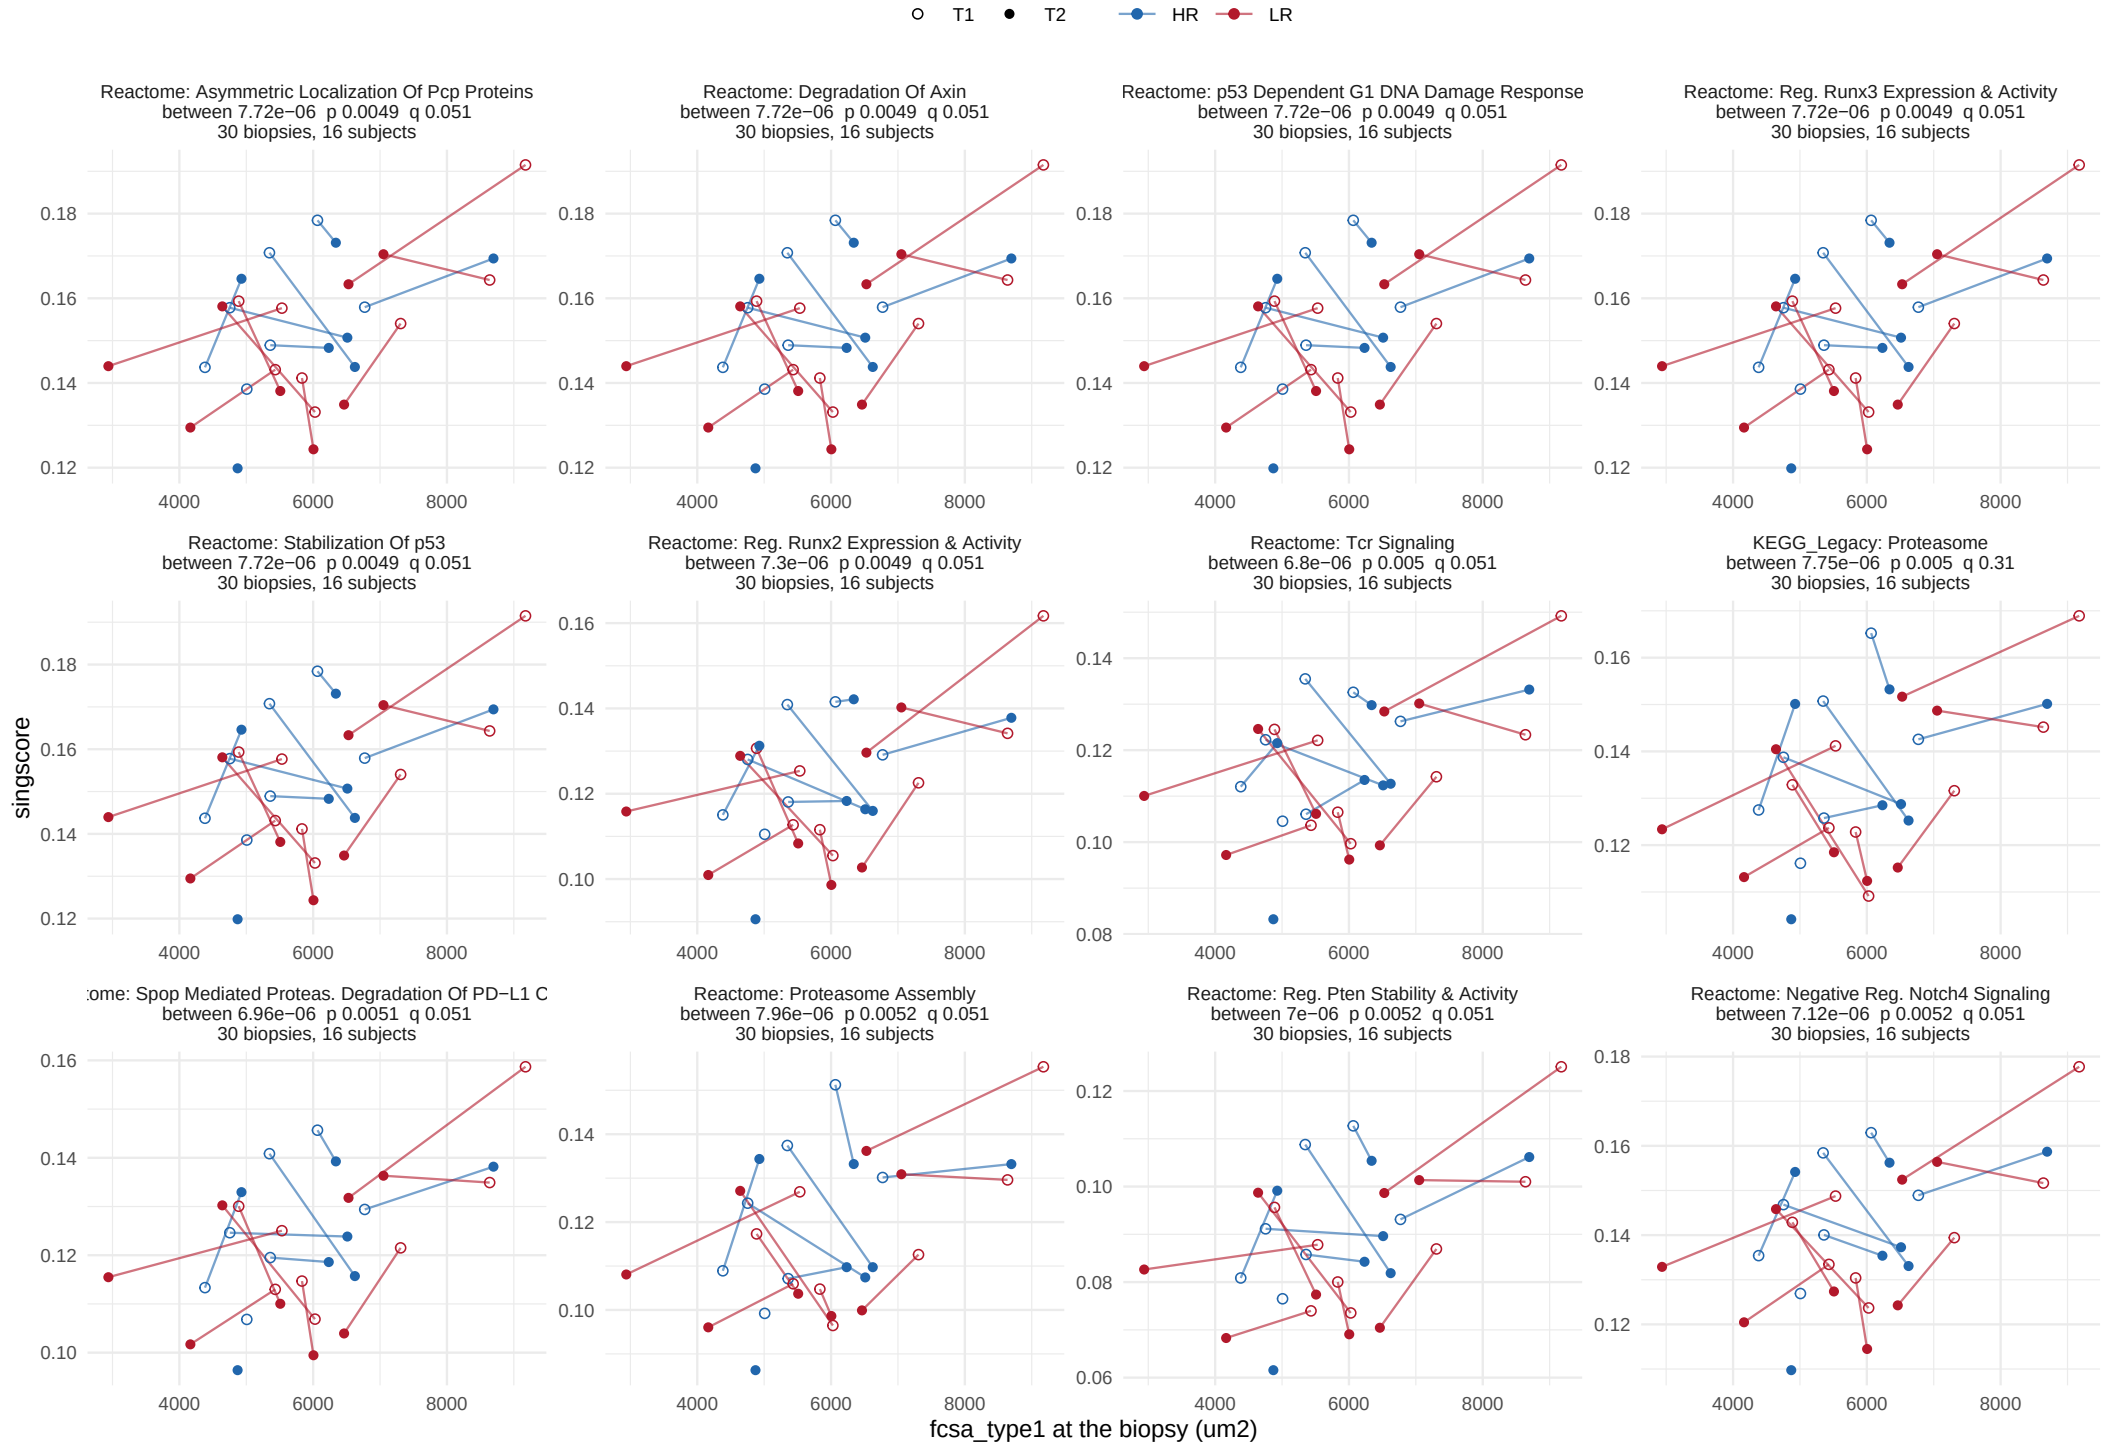


limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

## fcsa_type1, between−person term


122 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 3 of 11.

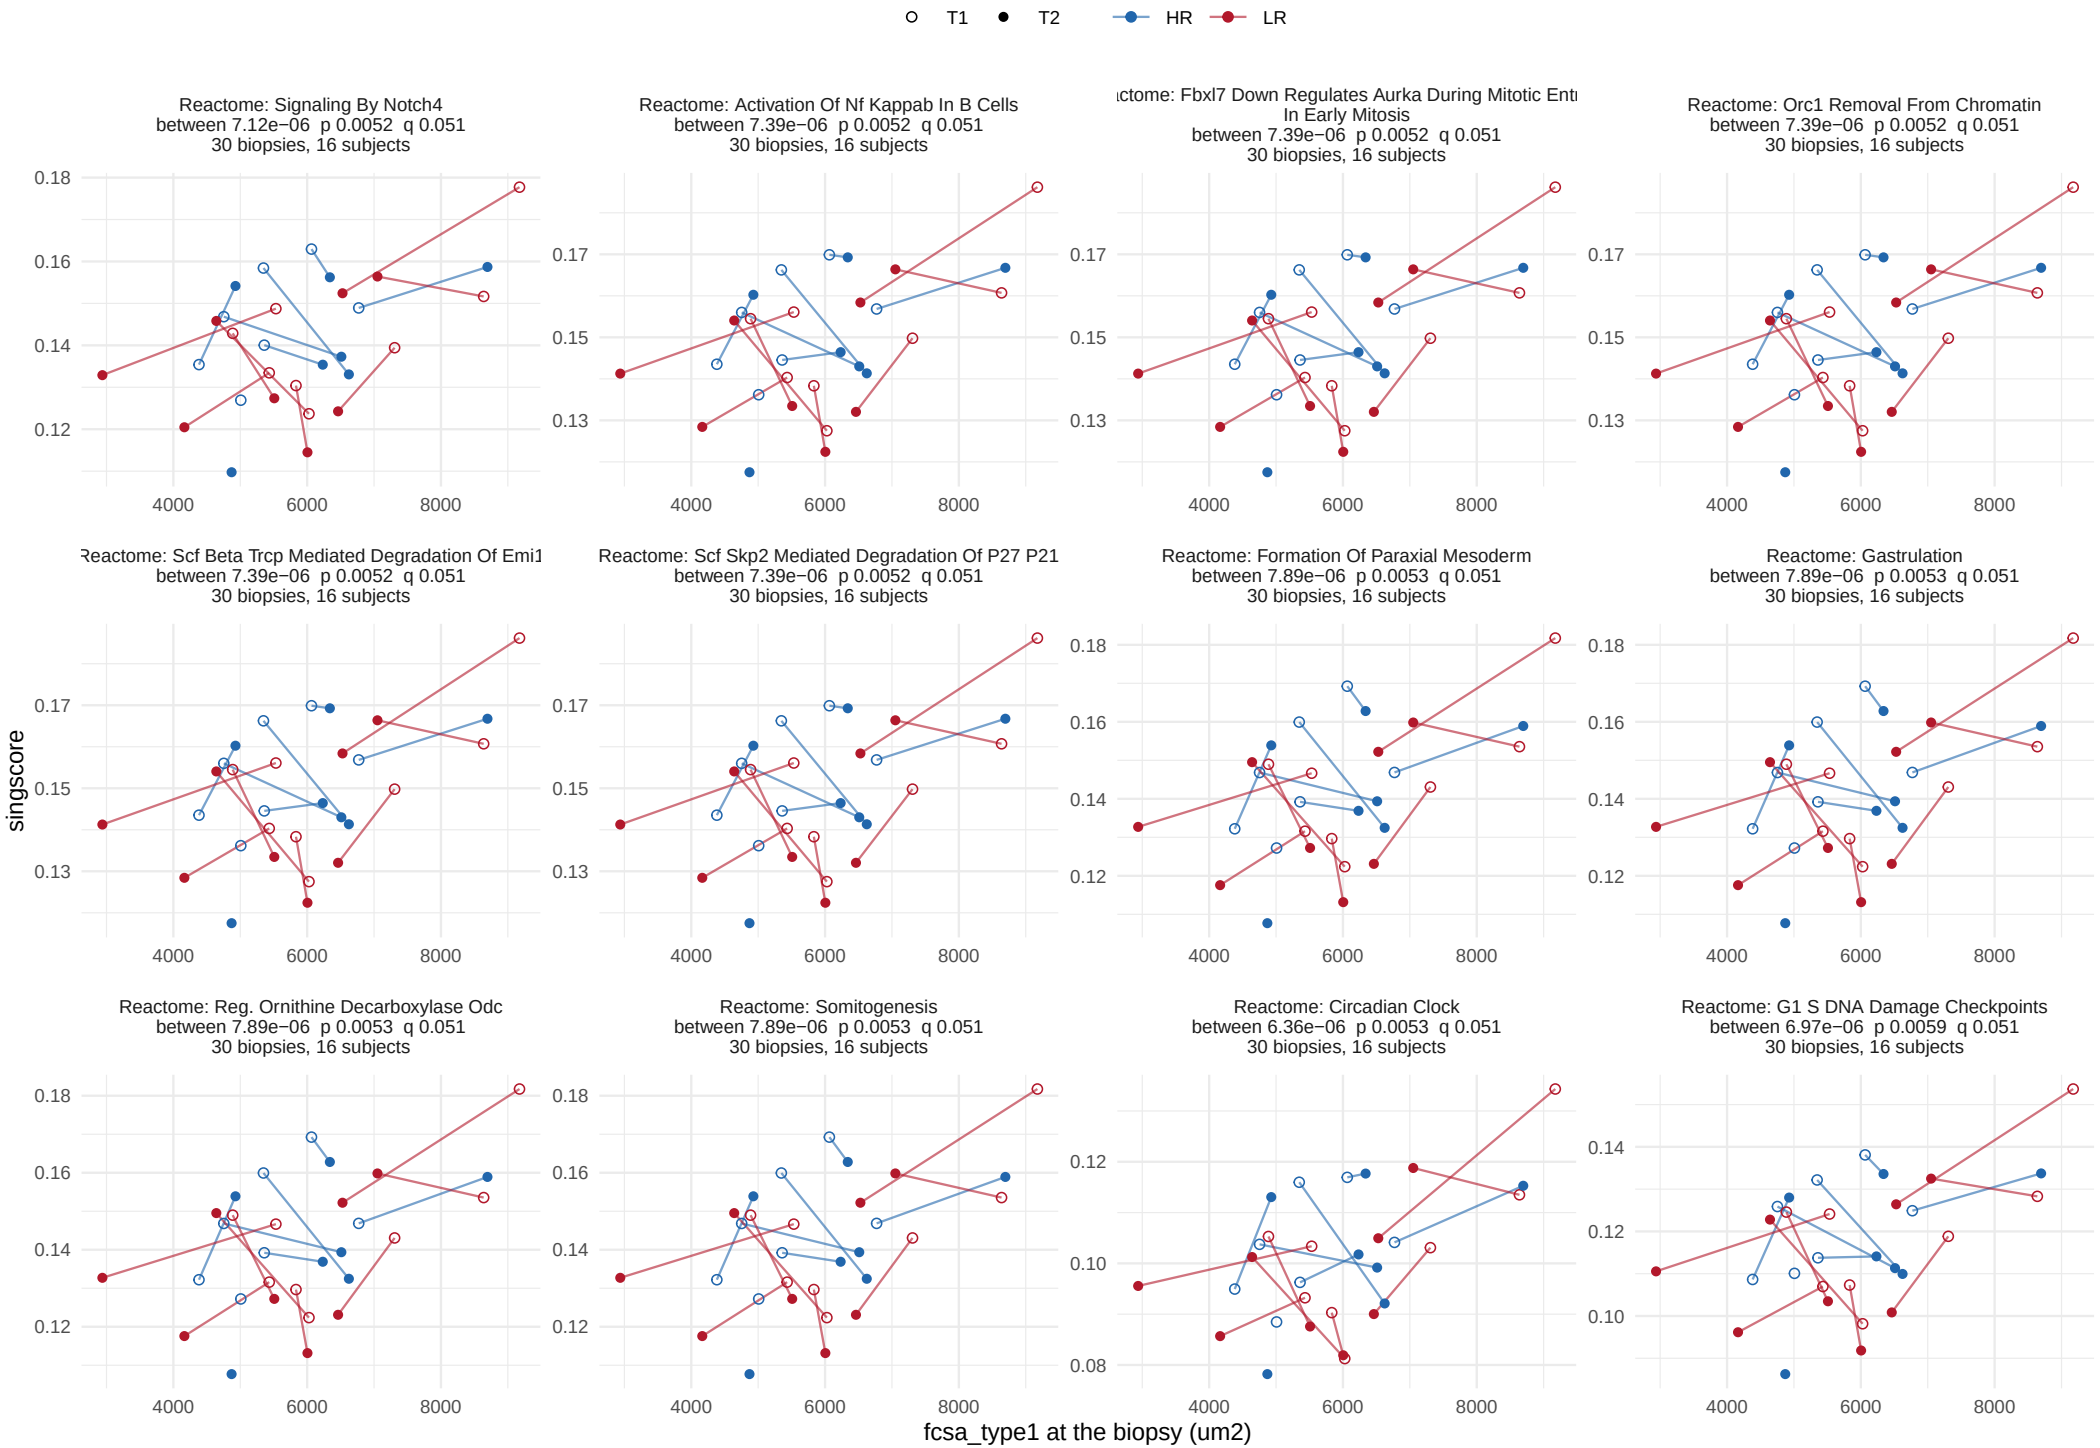


limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

## fcsa_type1, between−person term


122 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 4 of 11.

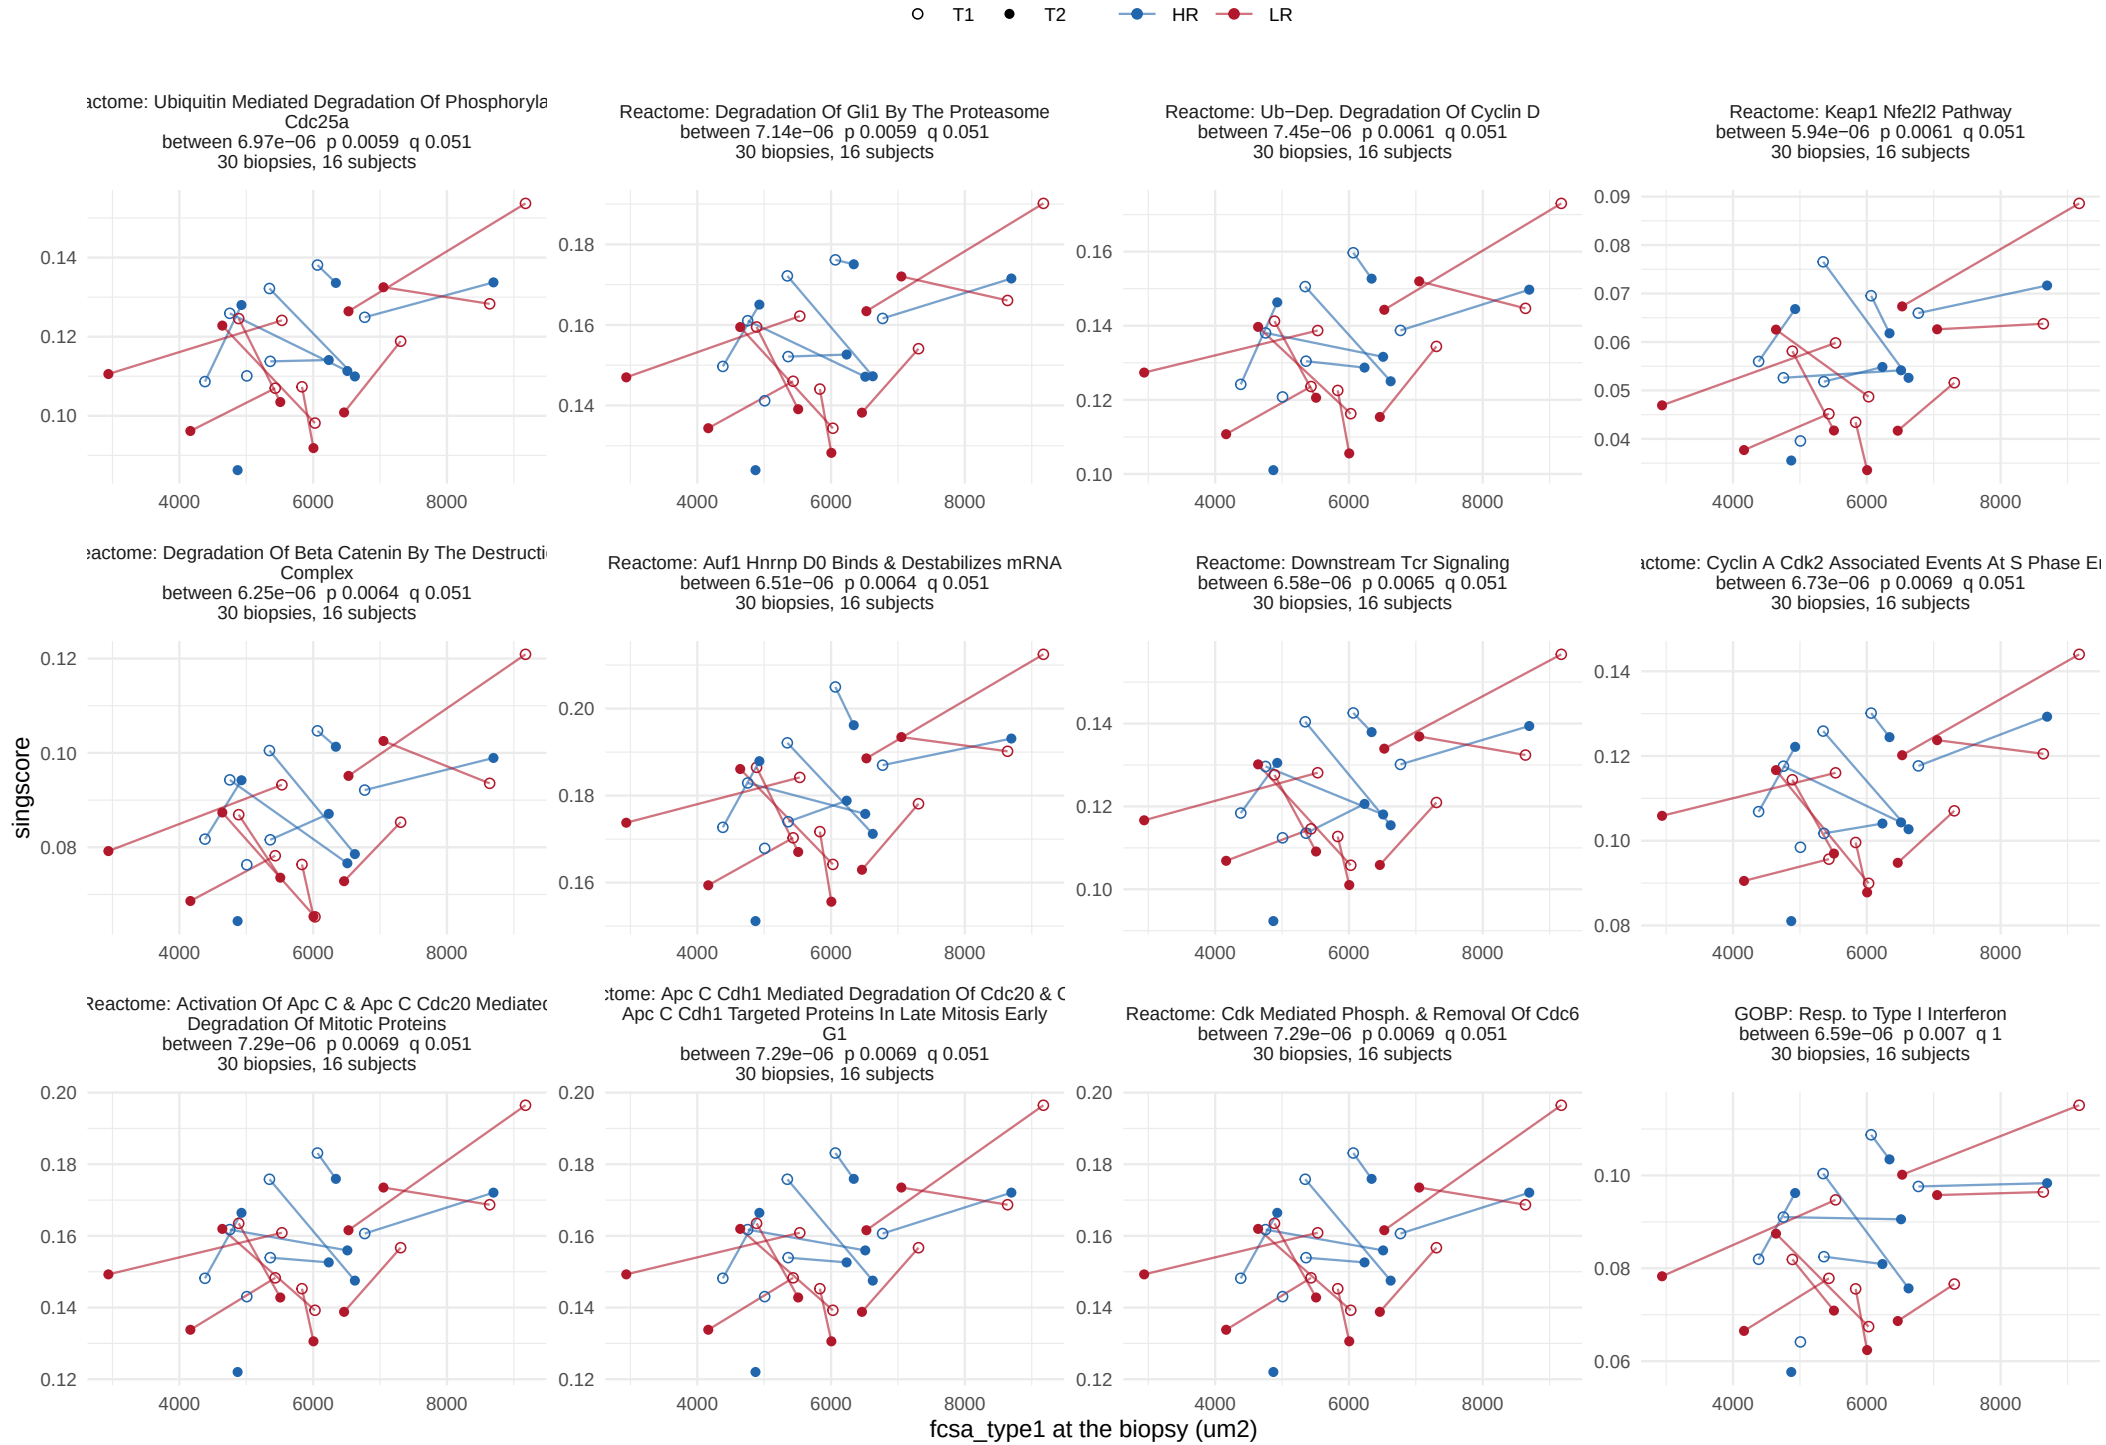


limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

## fcsa_type1, between−person term


122 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 5 of 11.

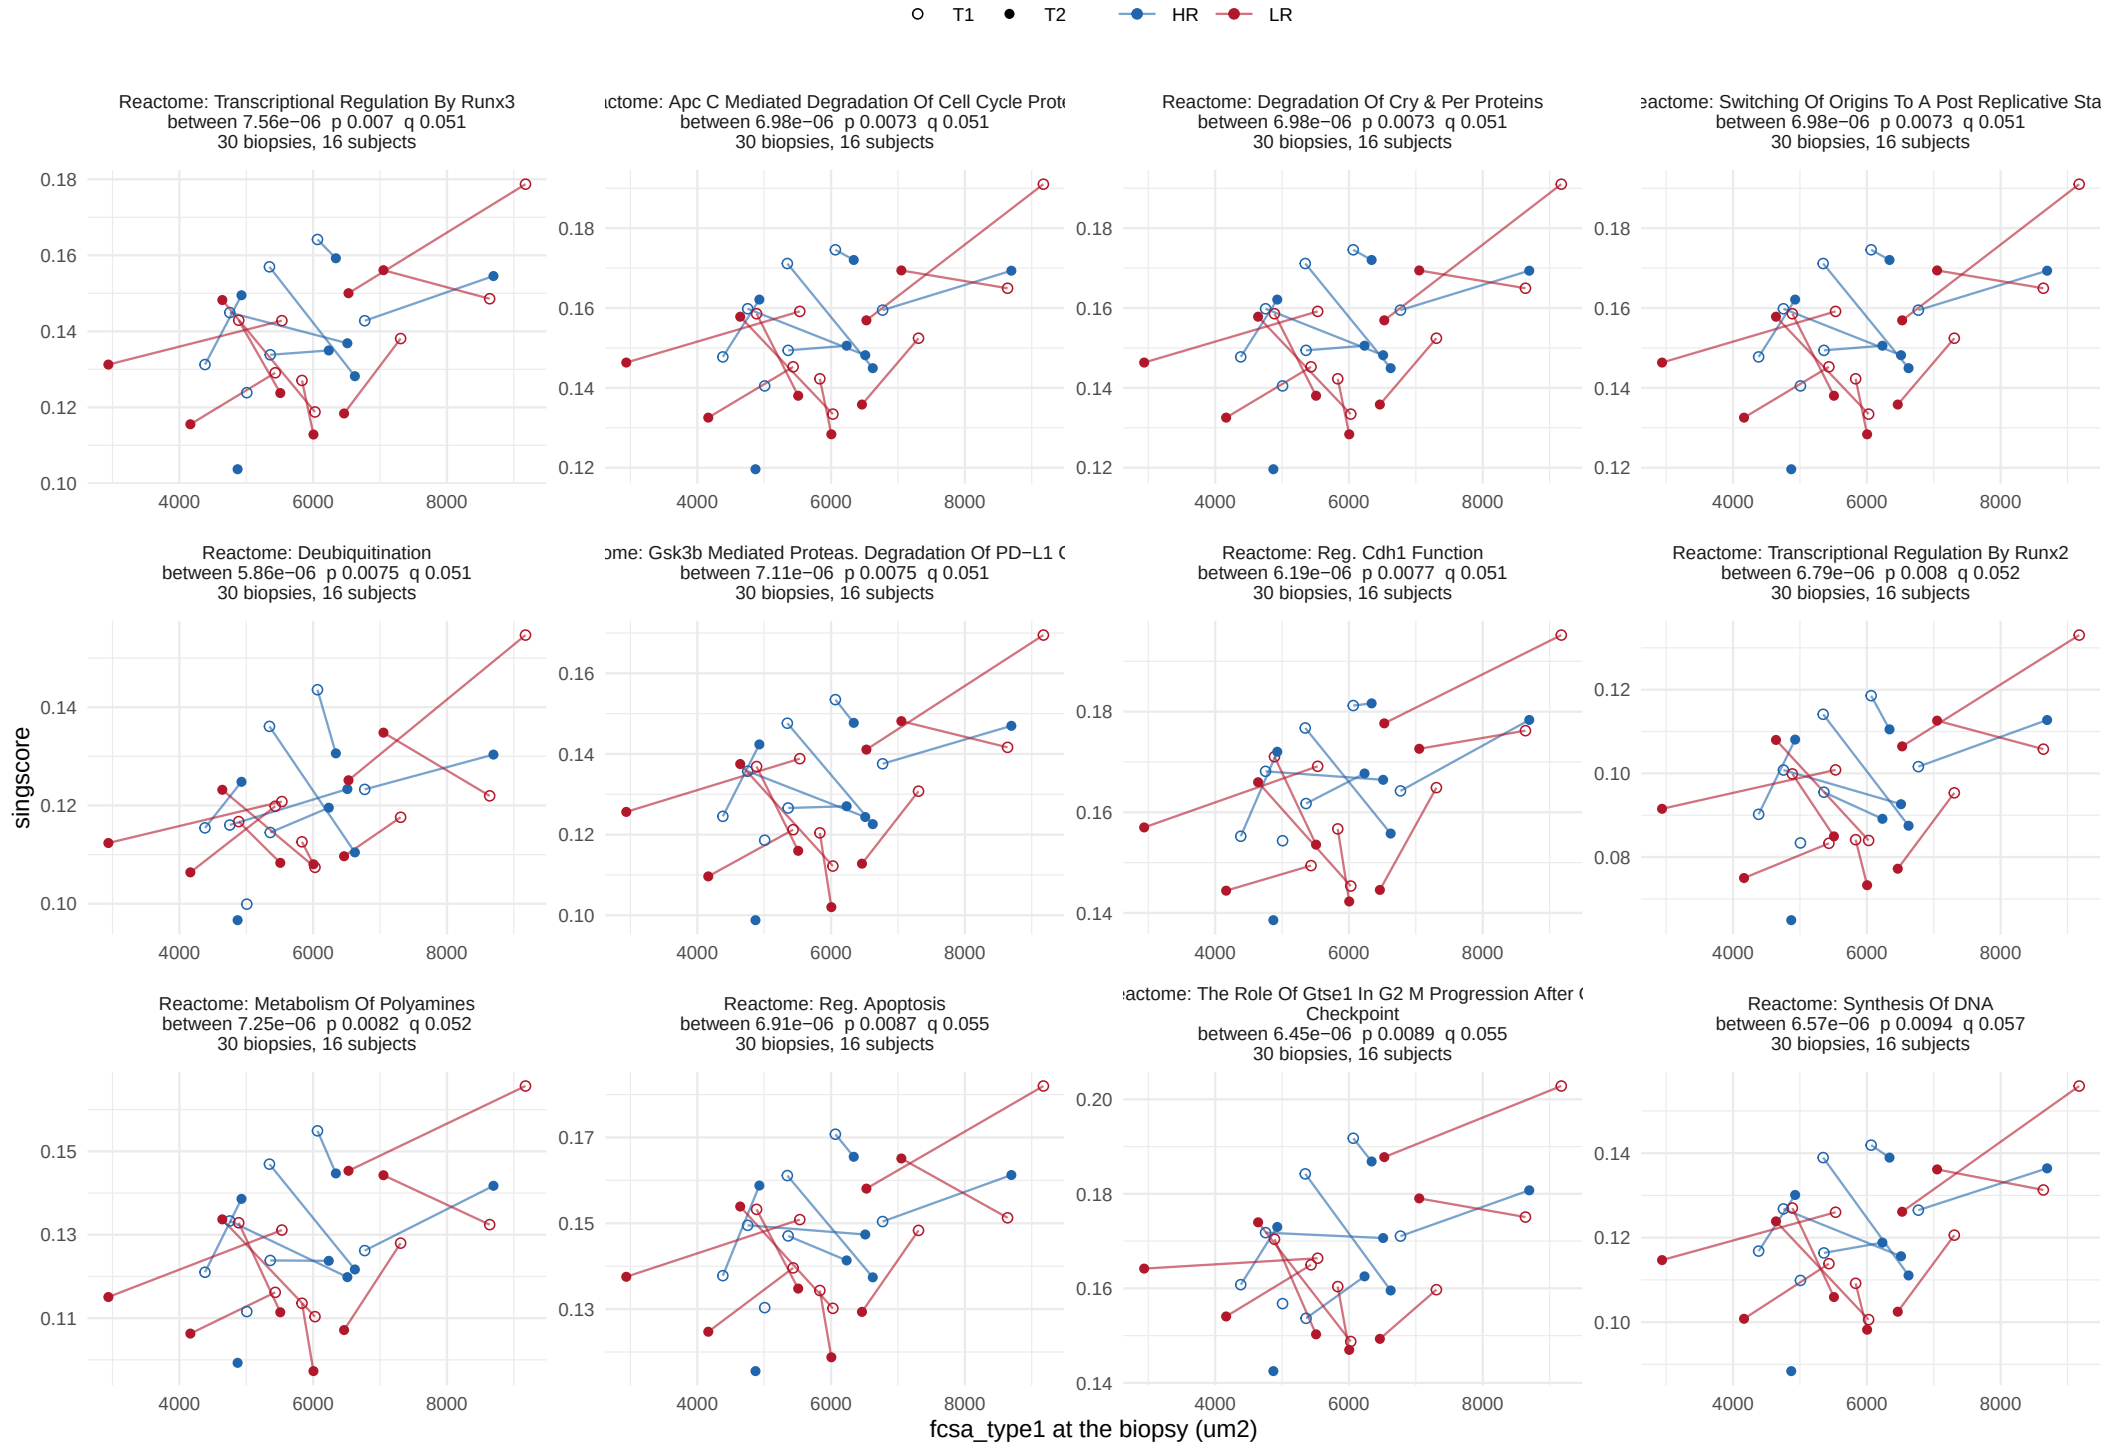


limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

## fcsa_type1, between−person term


122 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 6 of 11.

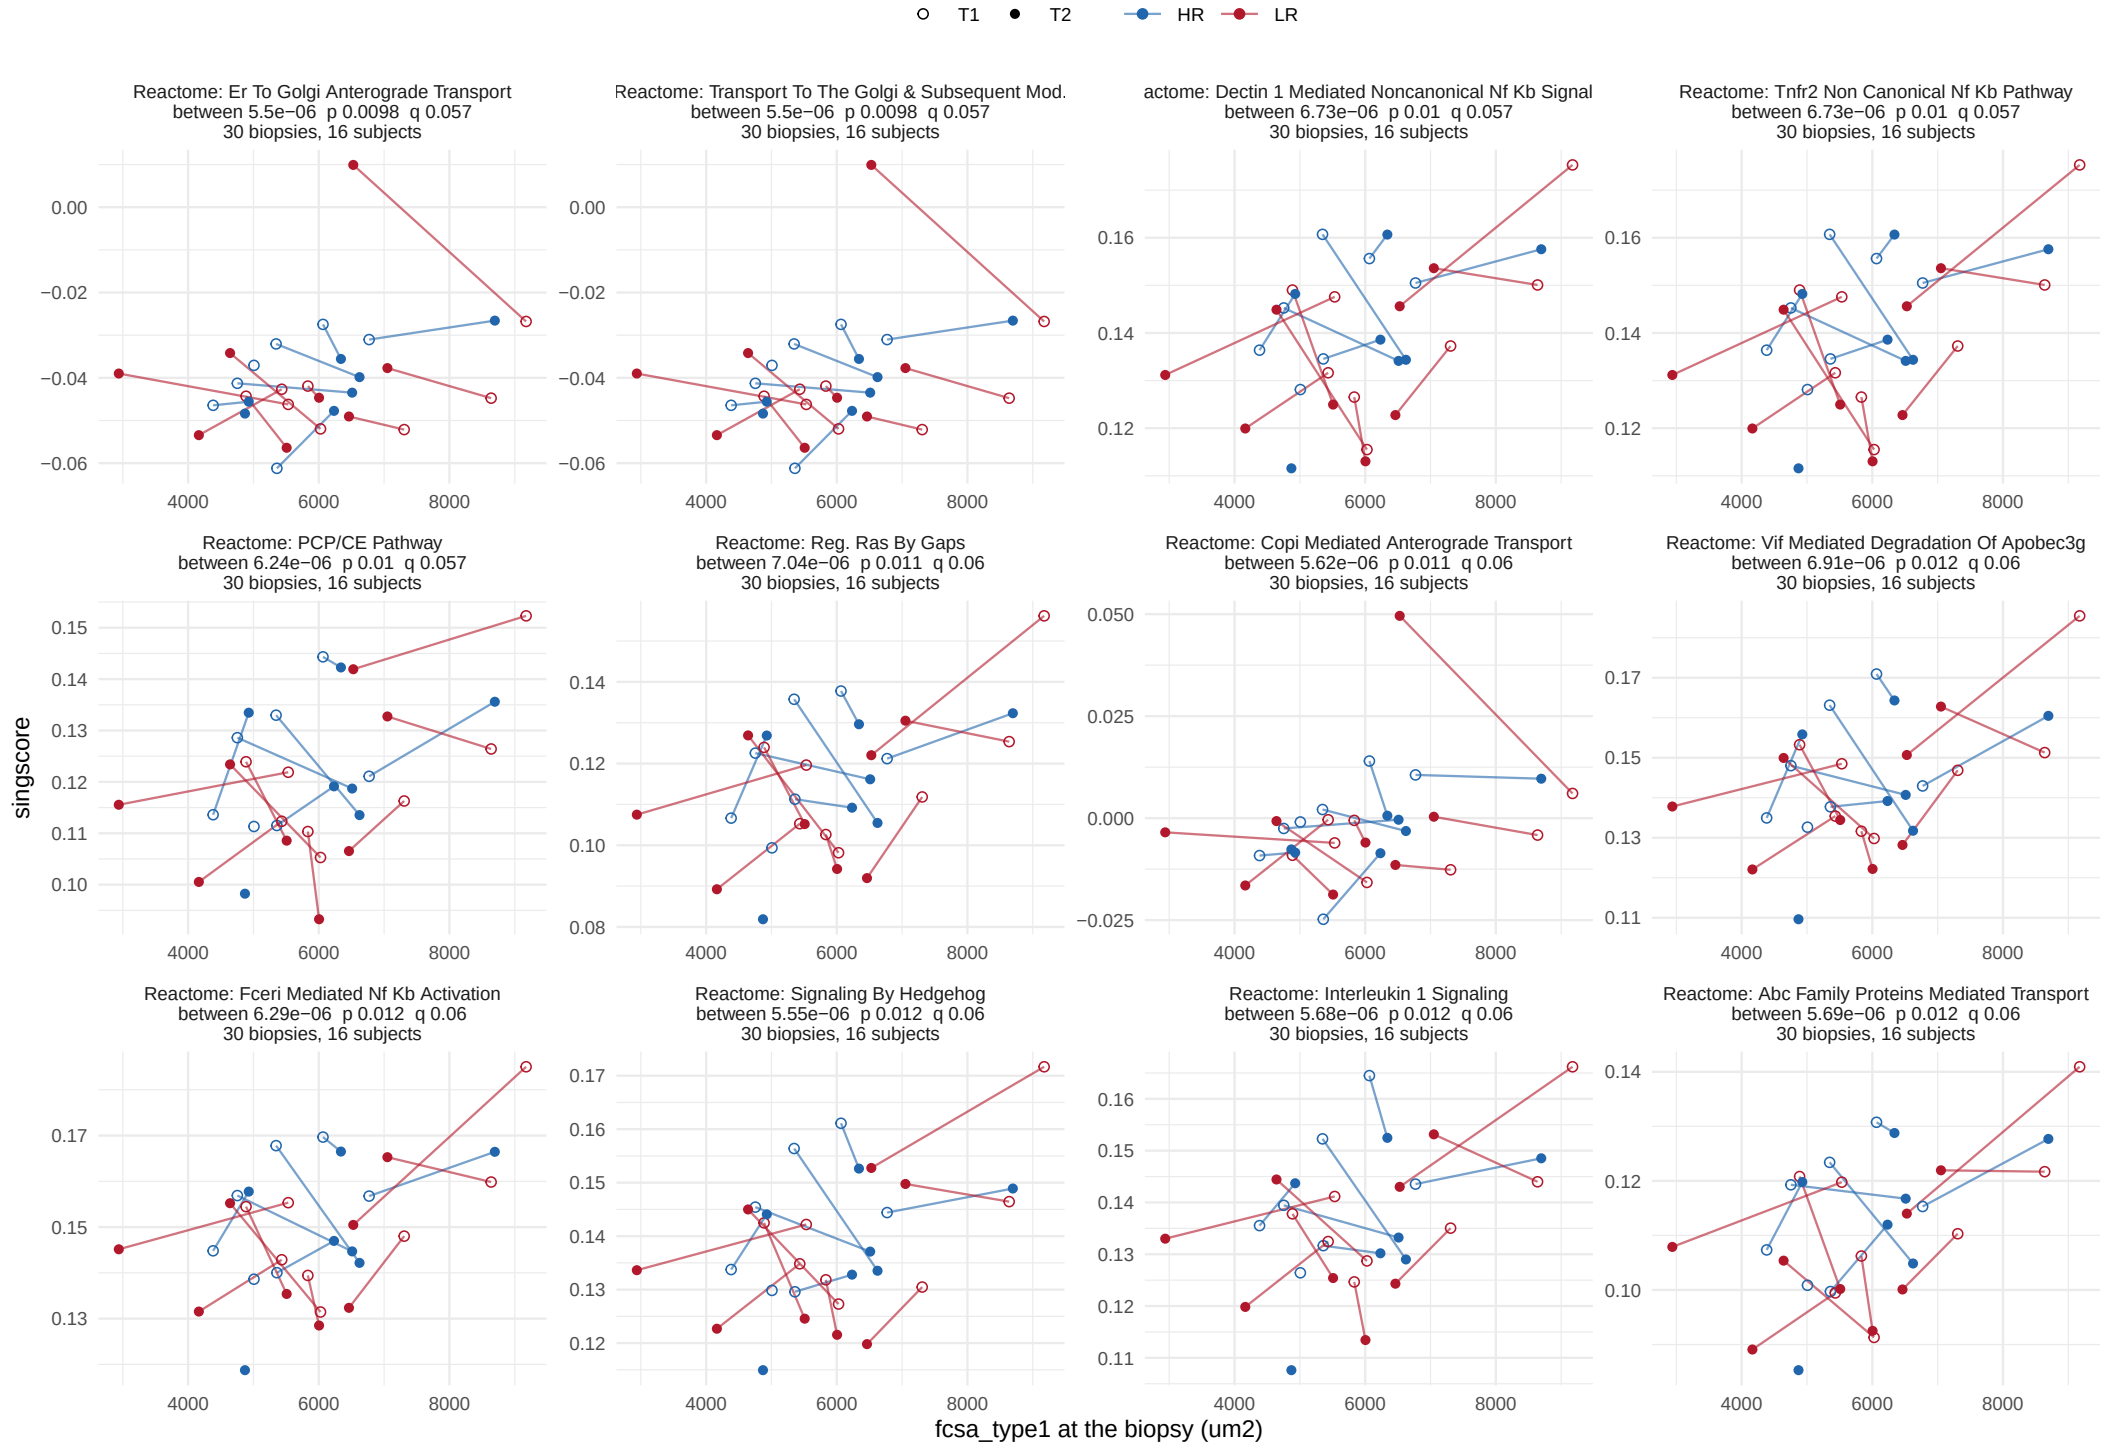


limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

## fcsa_type1, between−person term


122 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 7 of 11.

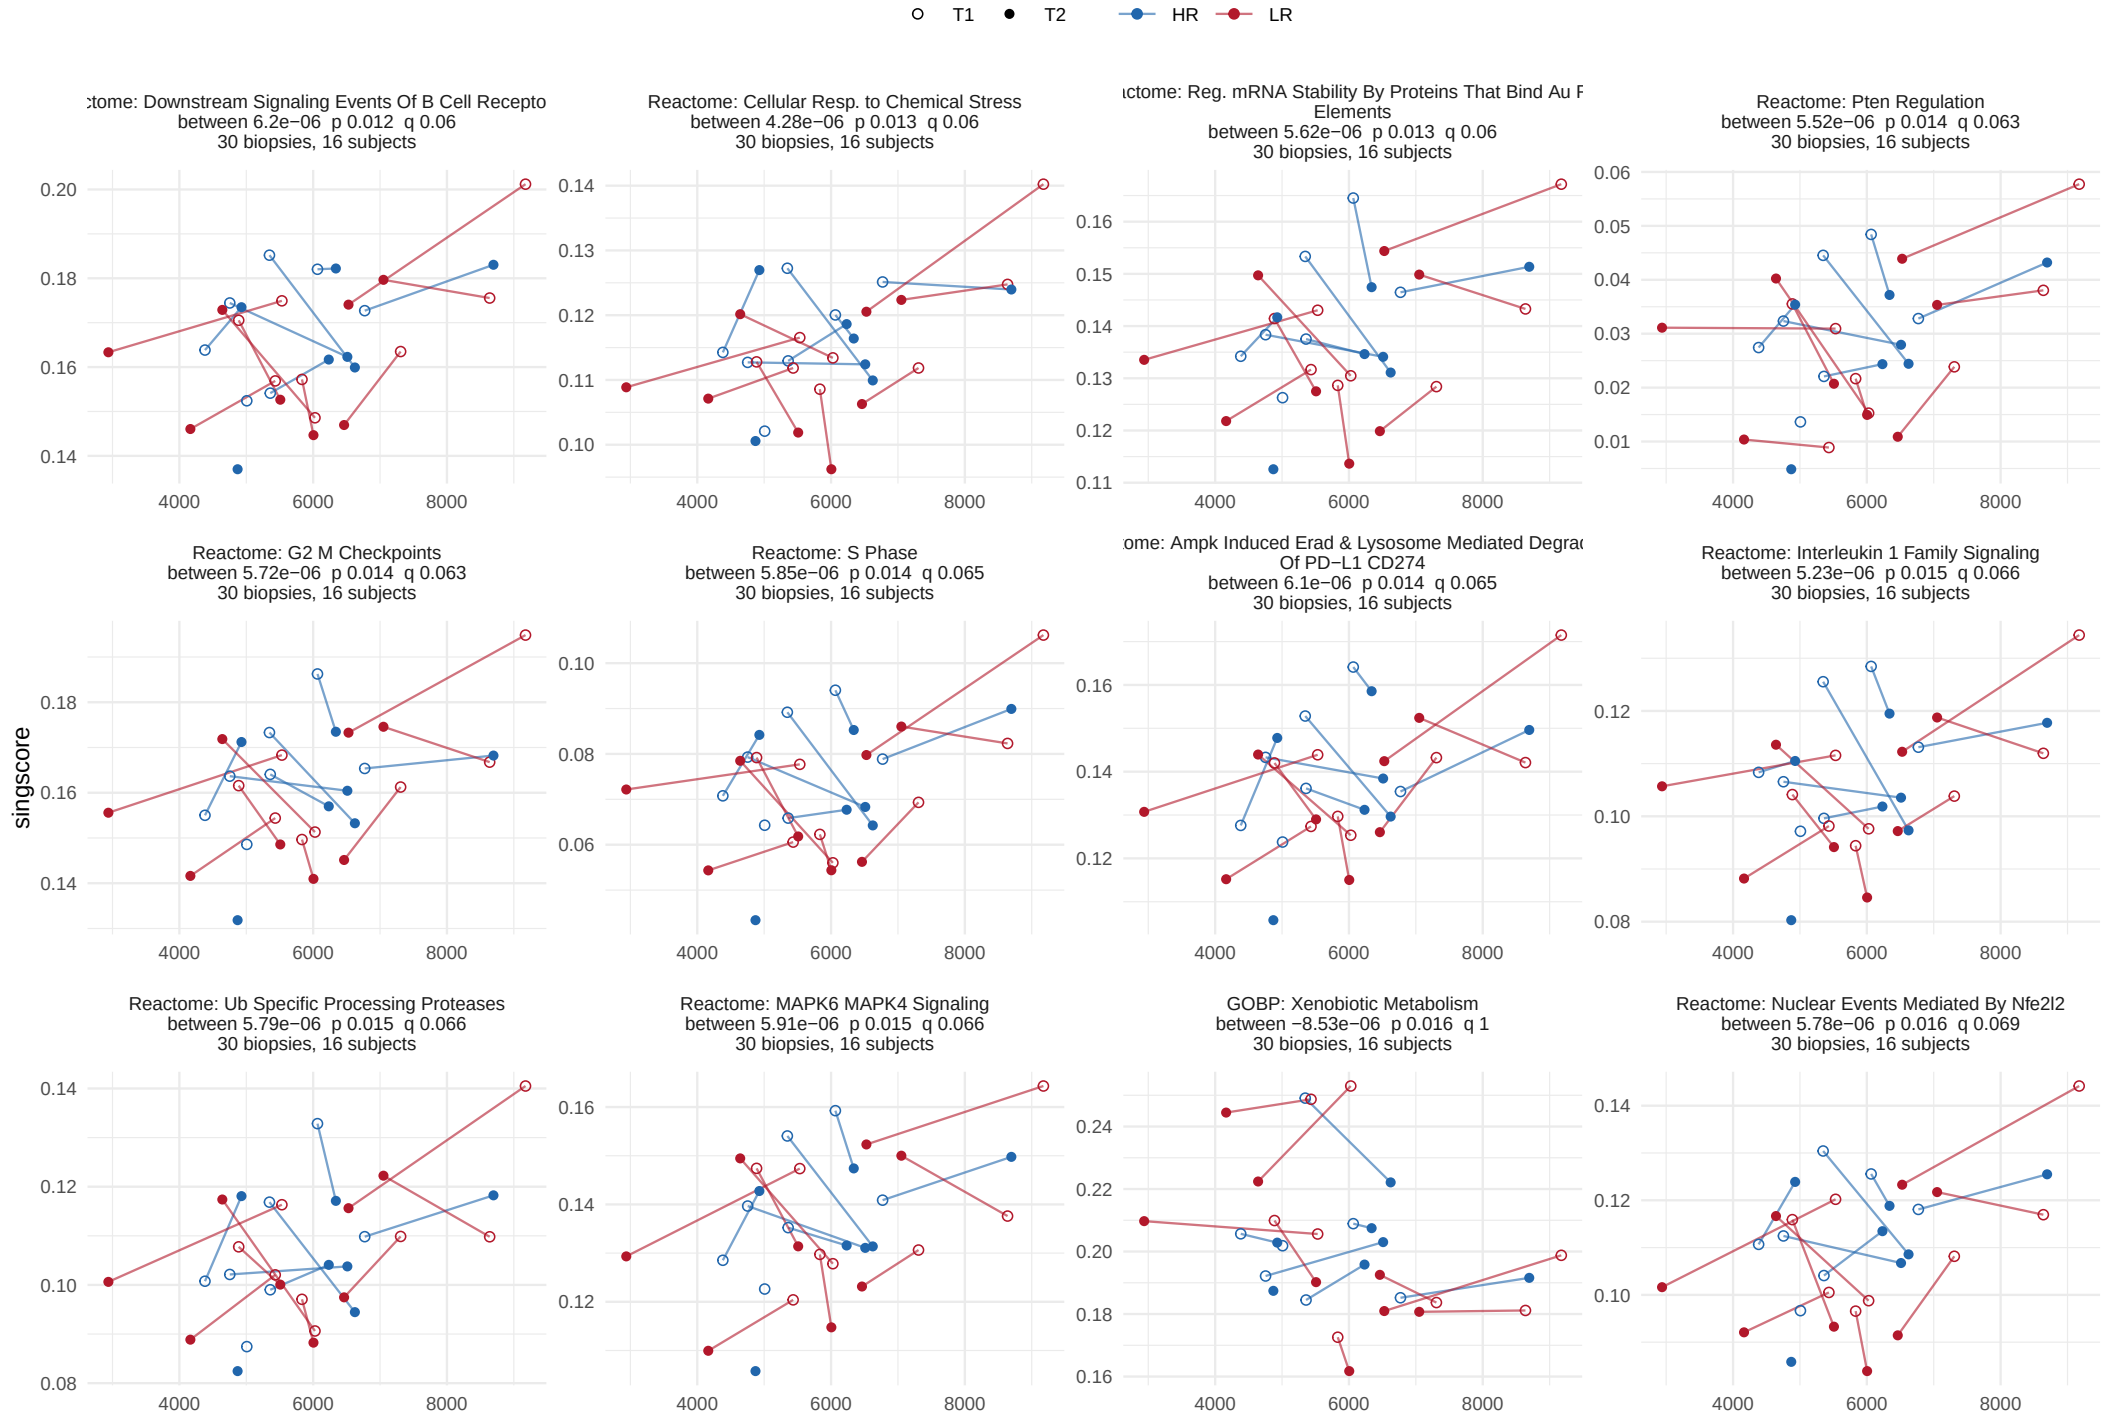


limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

## fcsa_type1, between−person term


122 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 8 of 11.

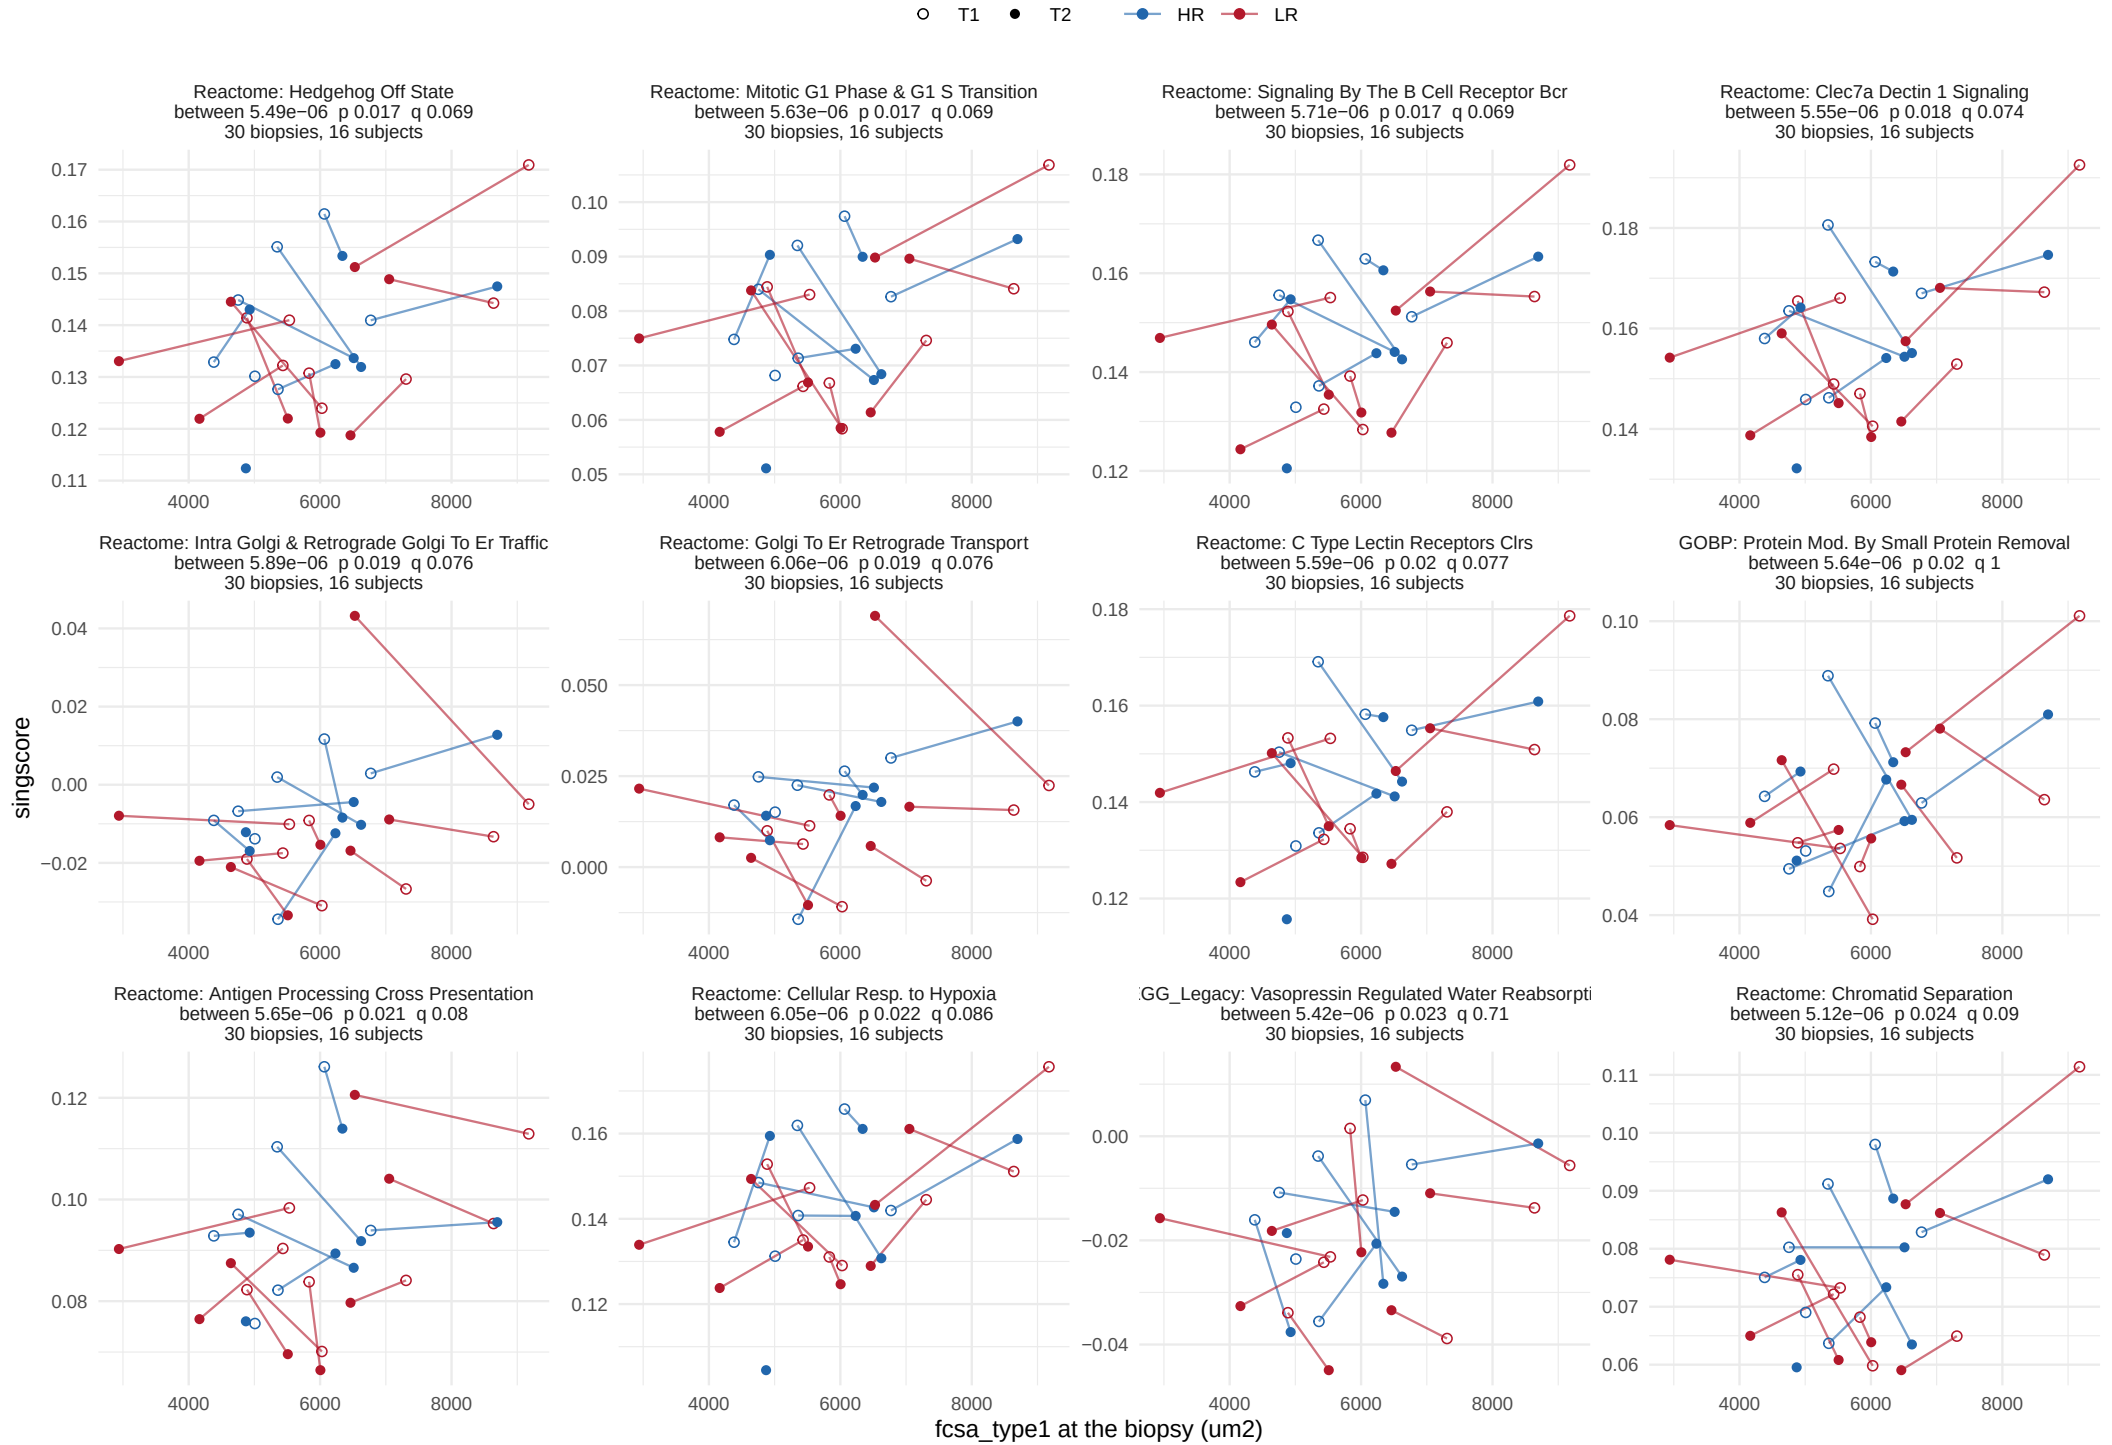


limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

## fcsa_type1, between−person term


122 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 9 of 11.

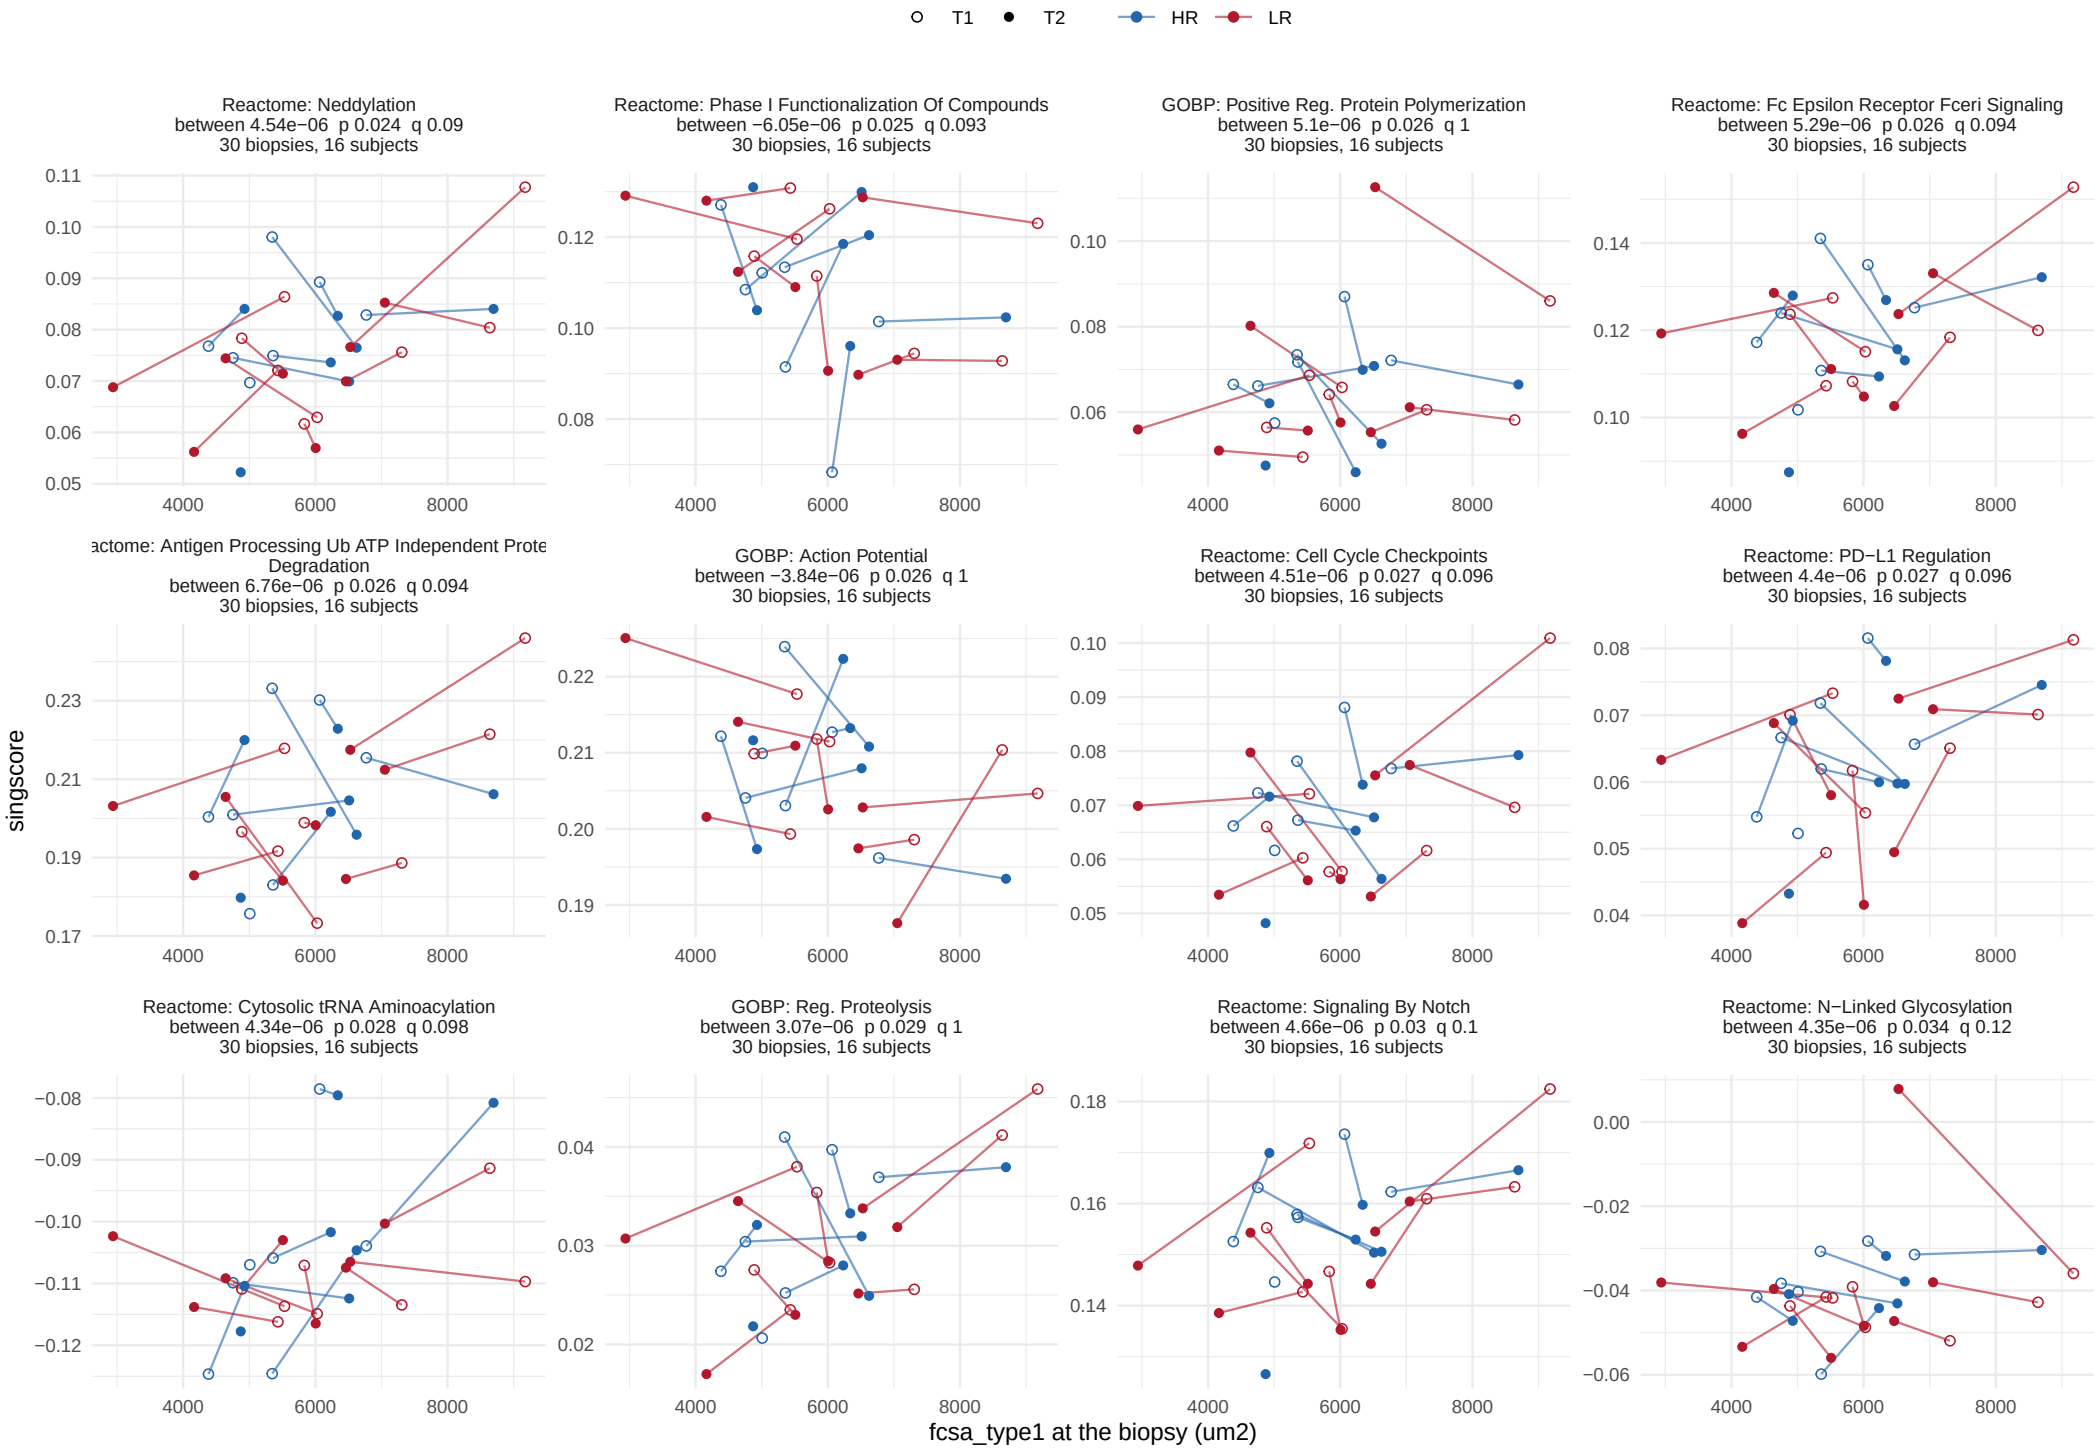


limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

## fcsa_type1, between−person term


122 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 10 of 11.

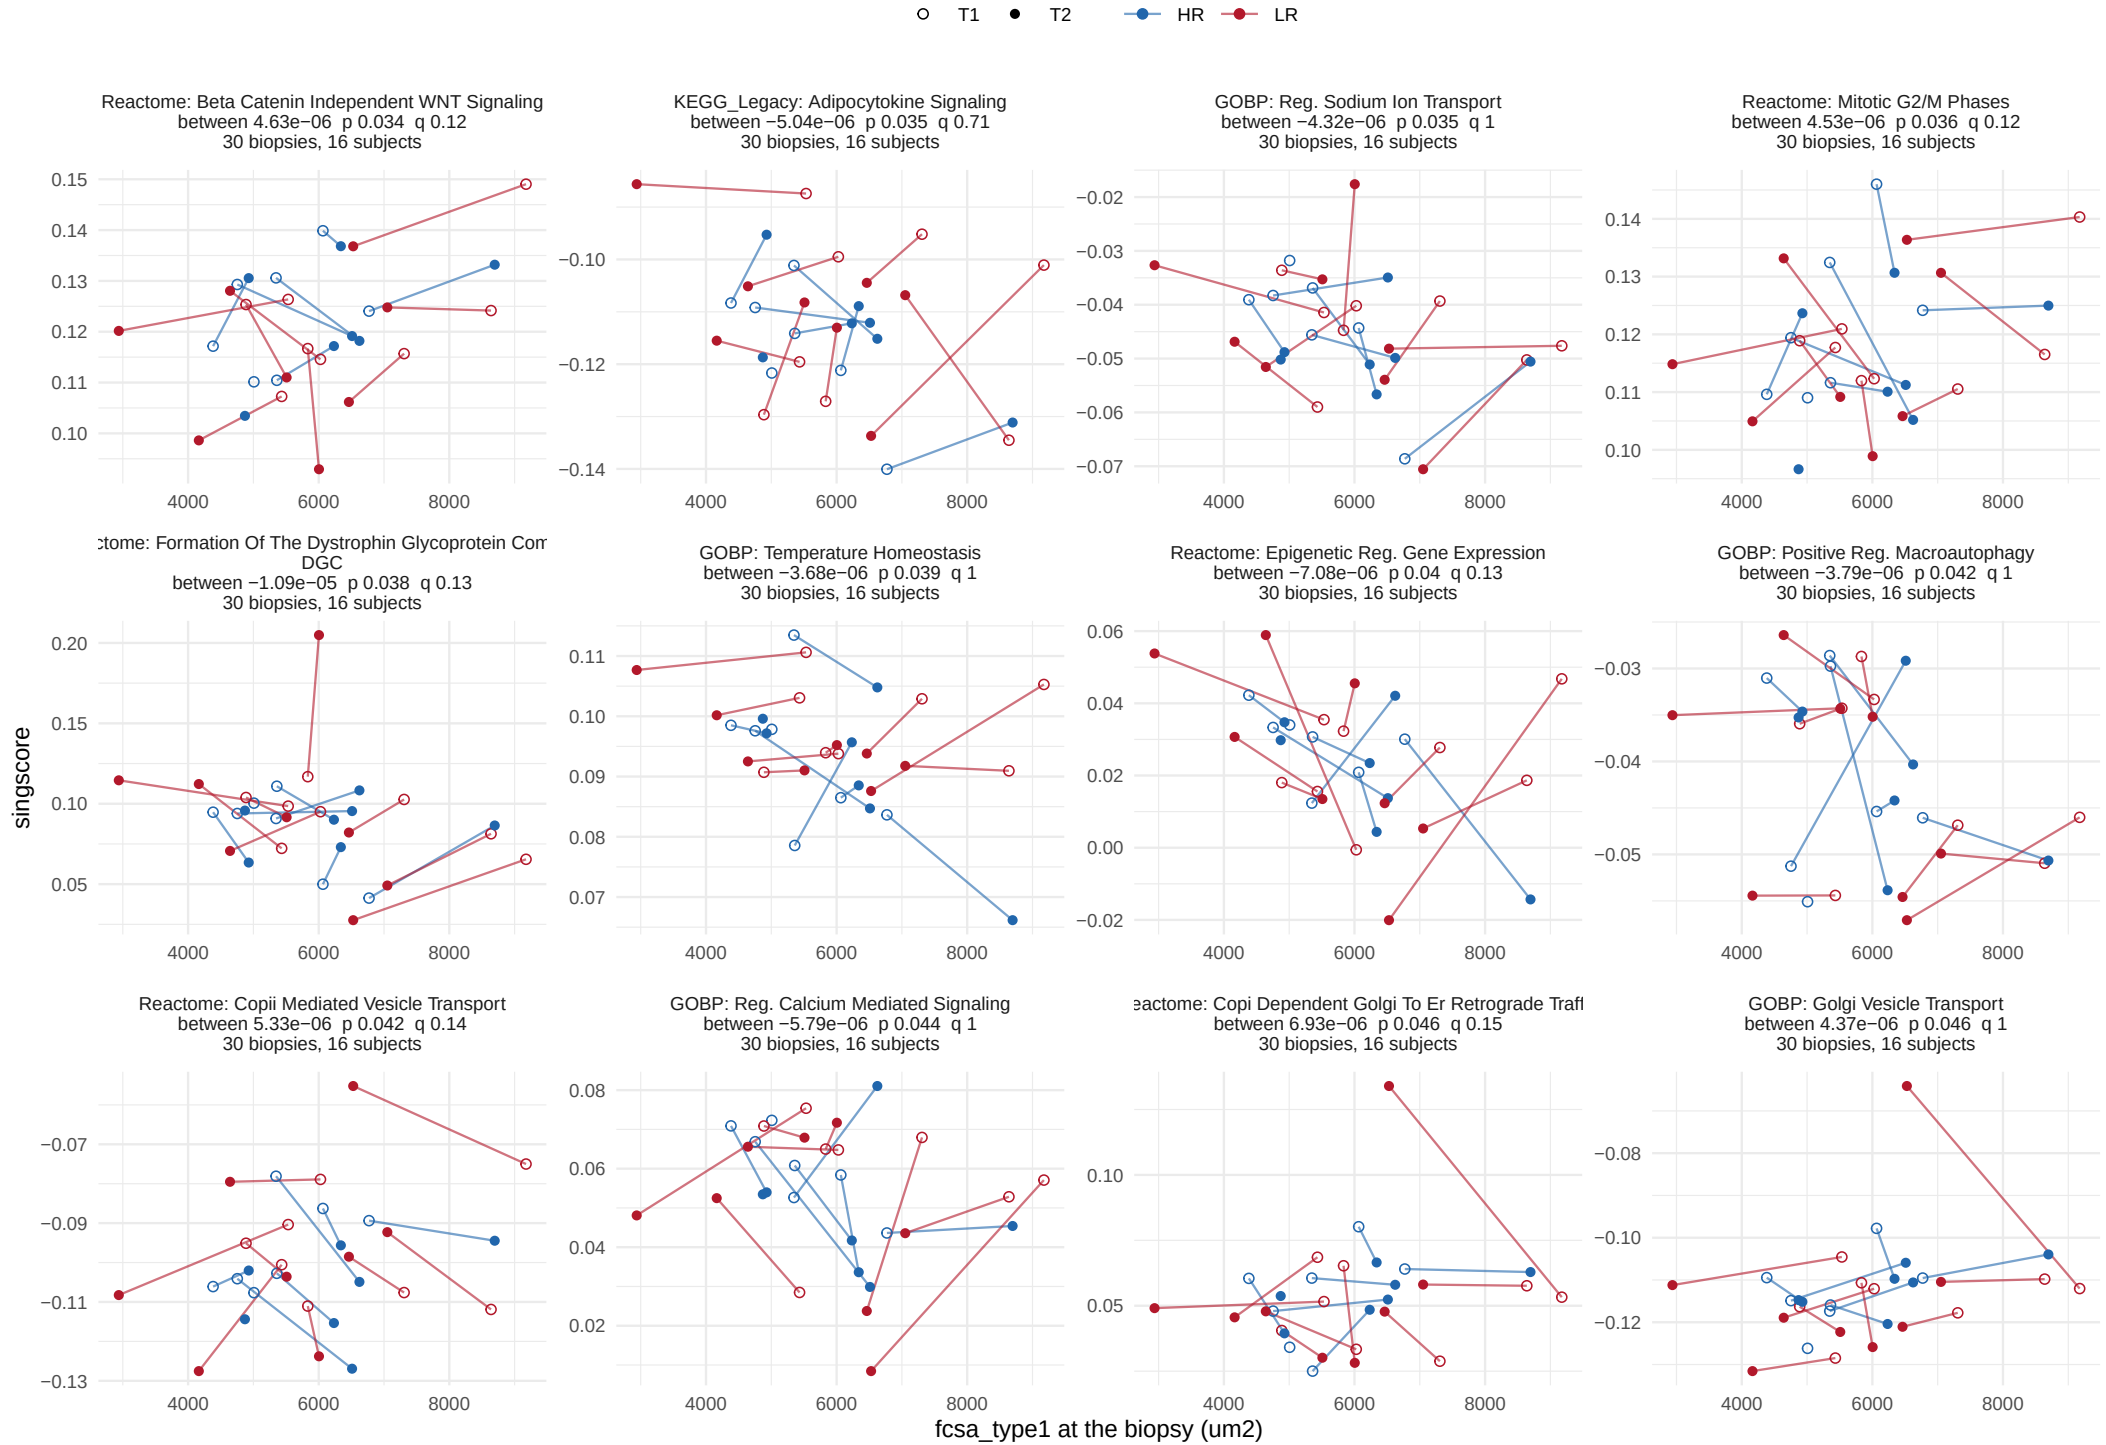


limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

## fcsa_type1, between−person term


122 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 11 of 11.

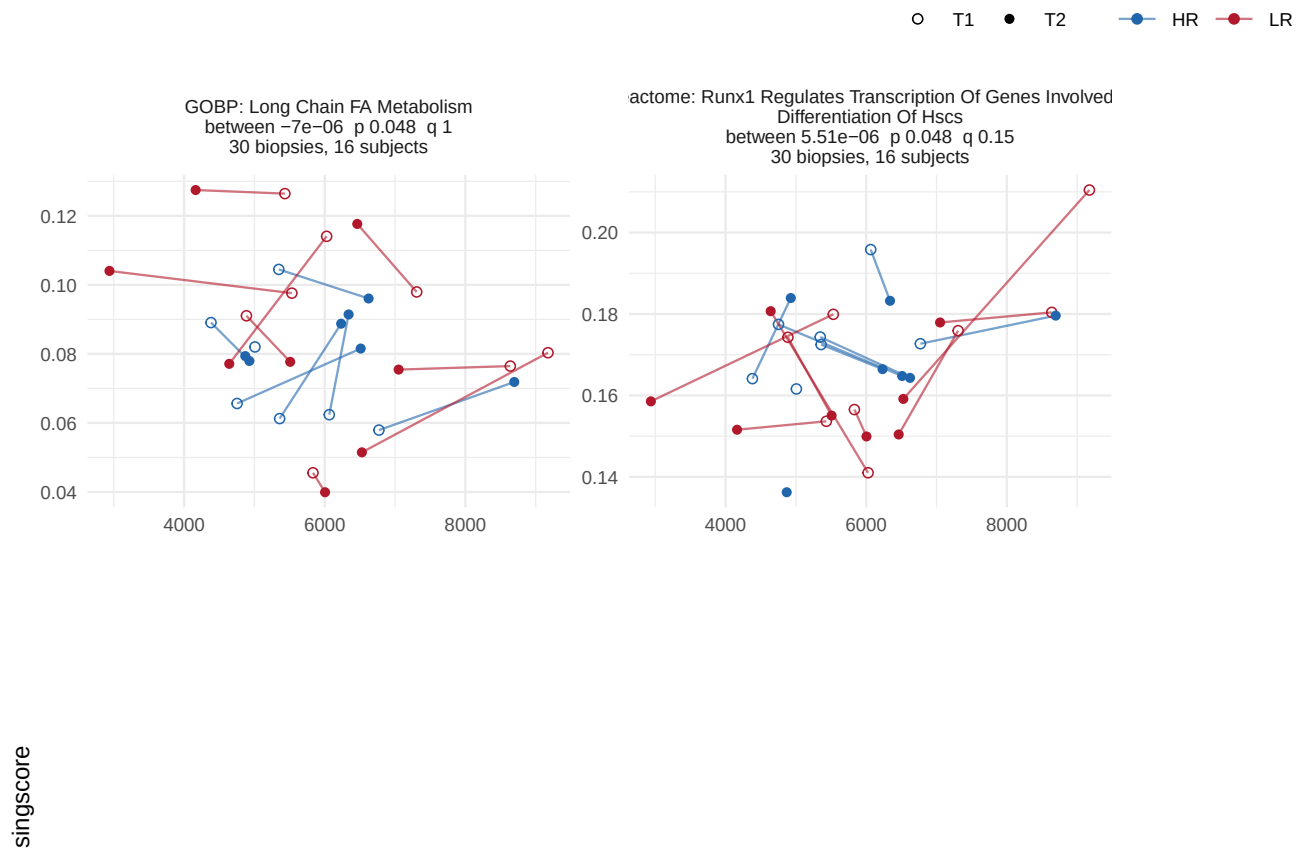


limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

## fcsa_type2, within−person term


94 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 1 of 8.

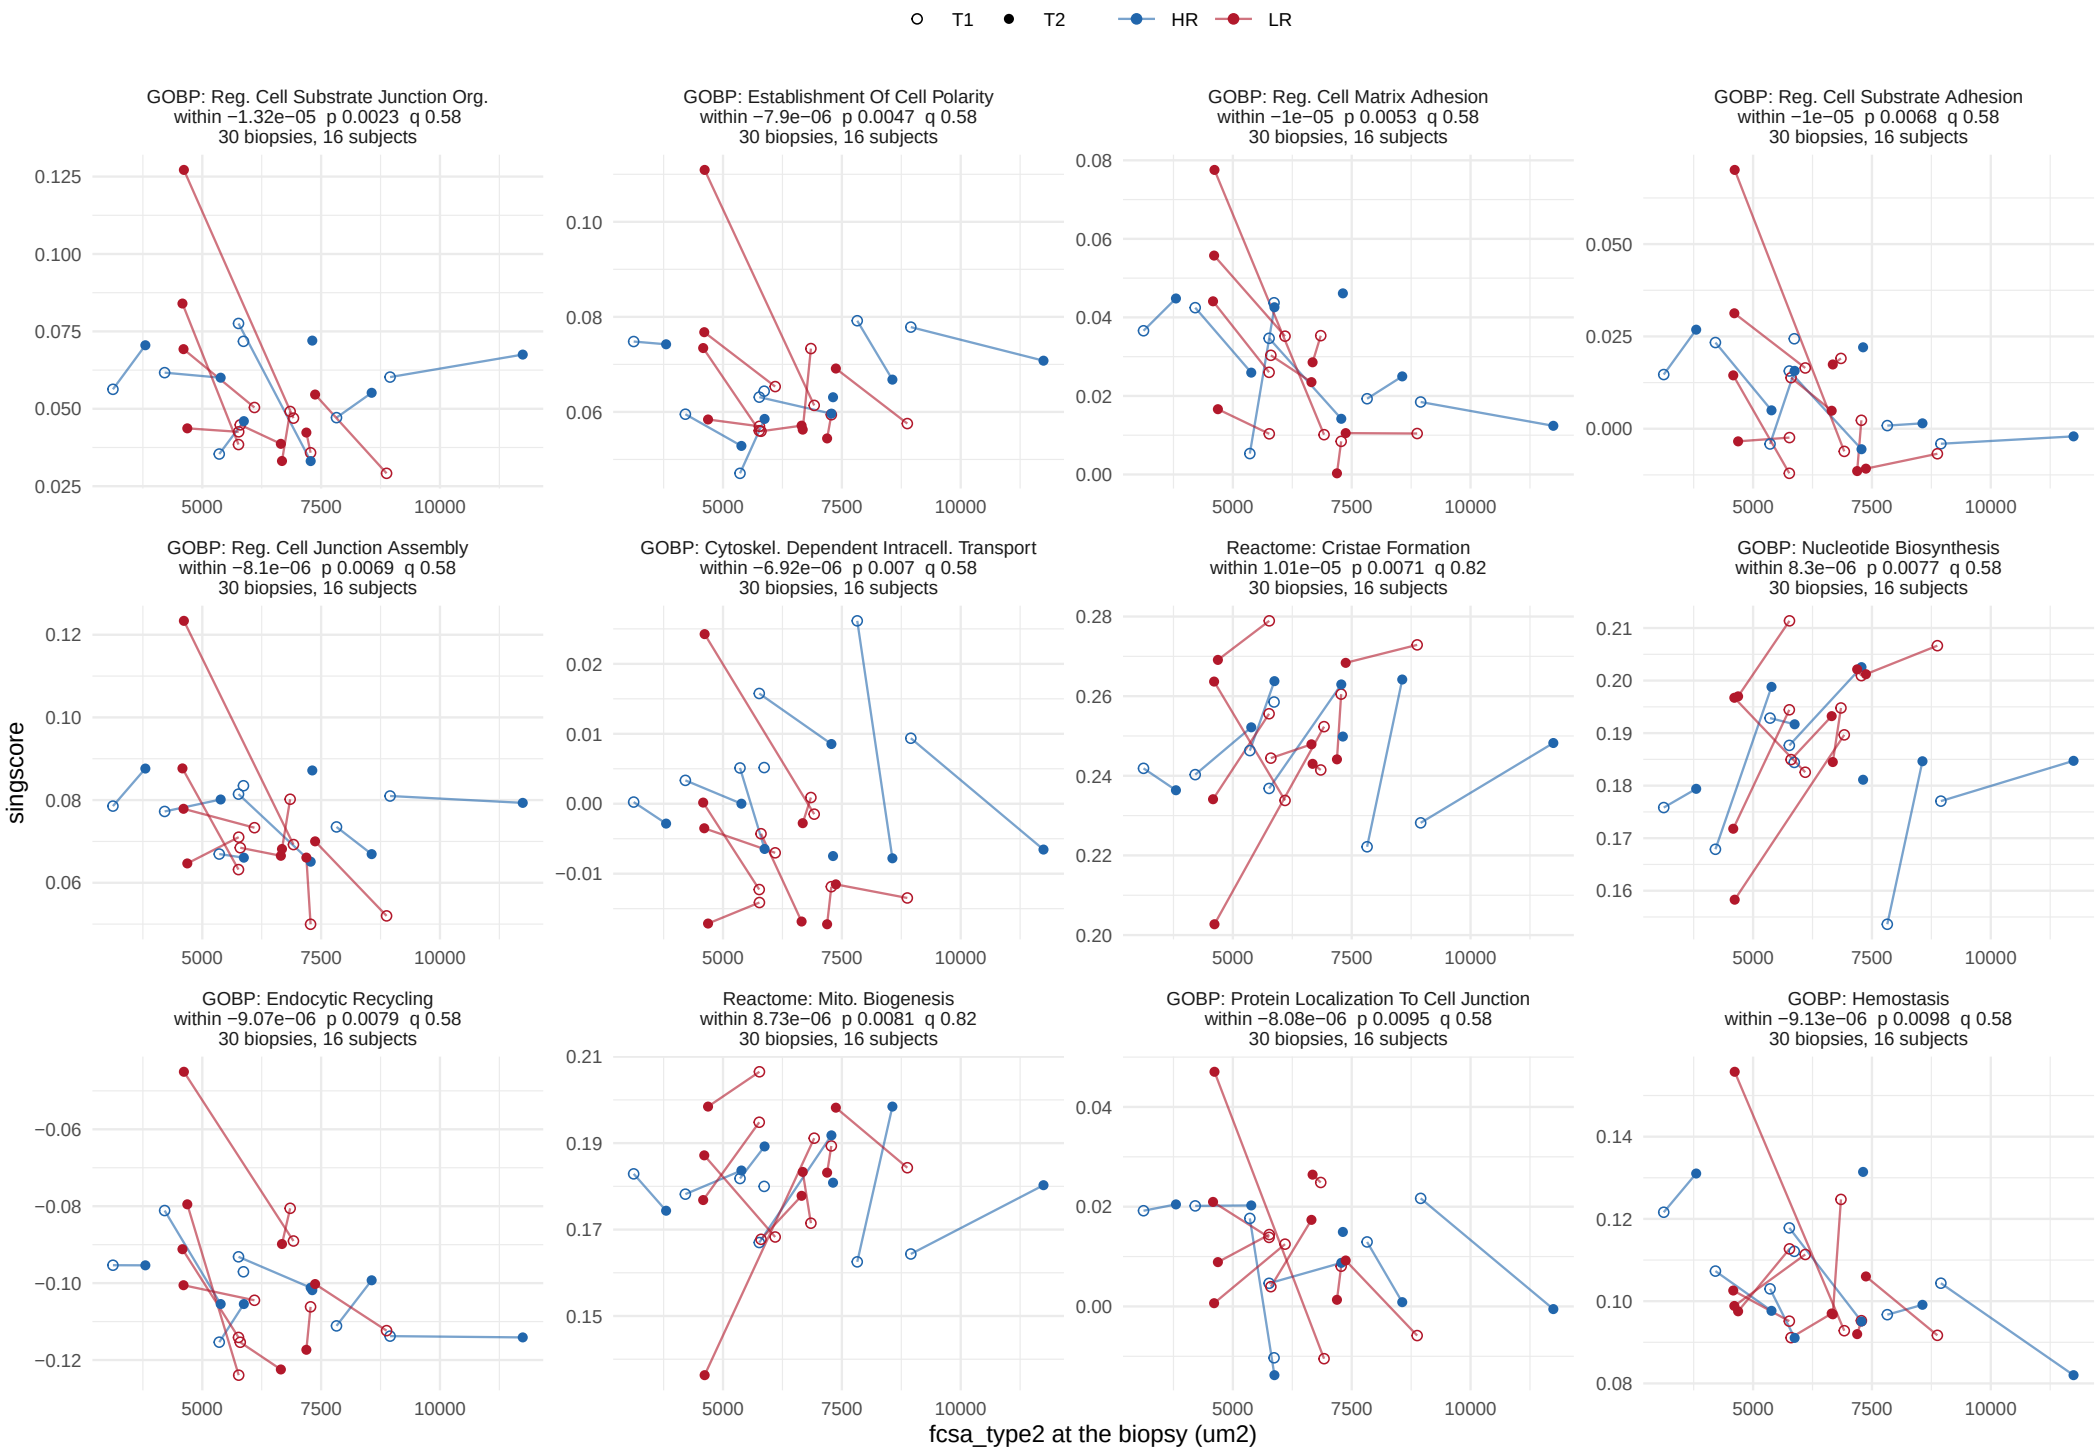


limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

# fcsa_type2, within−person term


94 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 2 of 8.

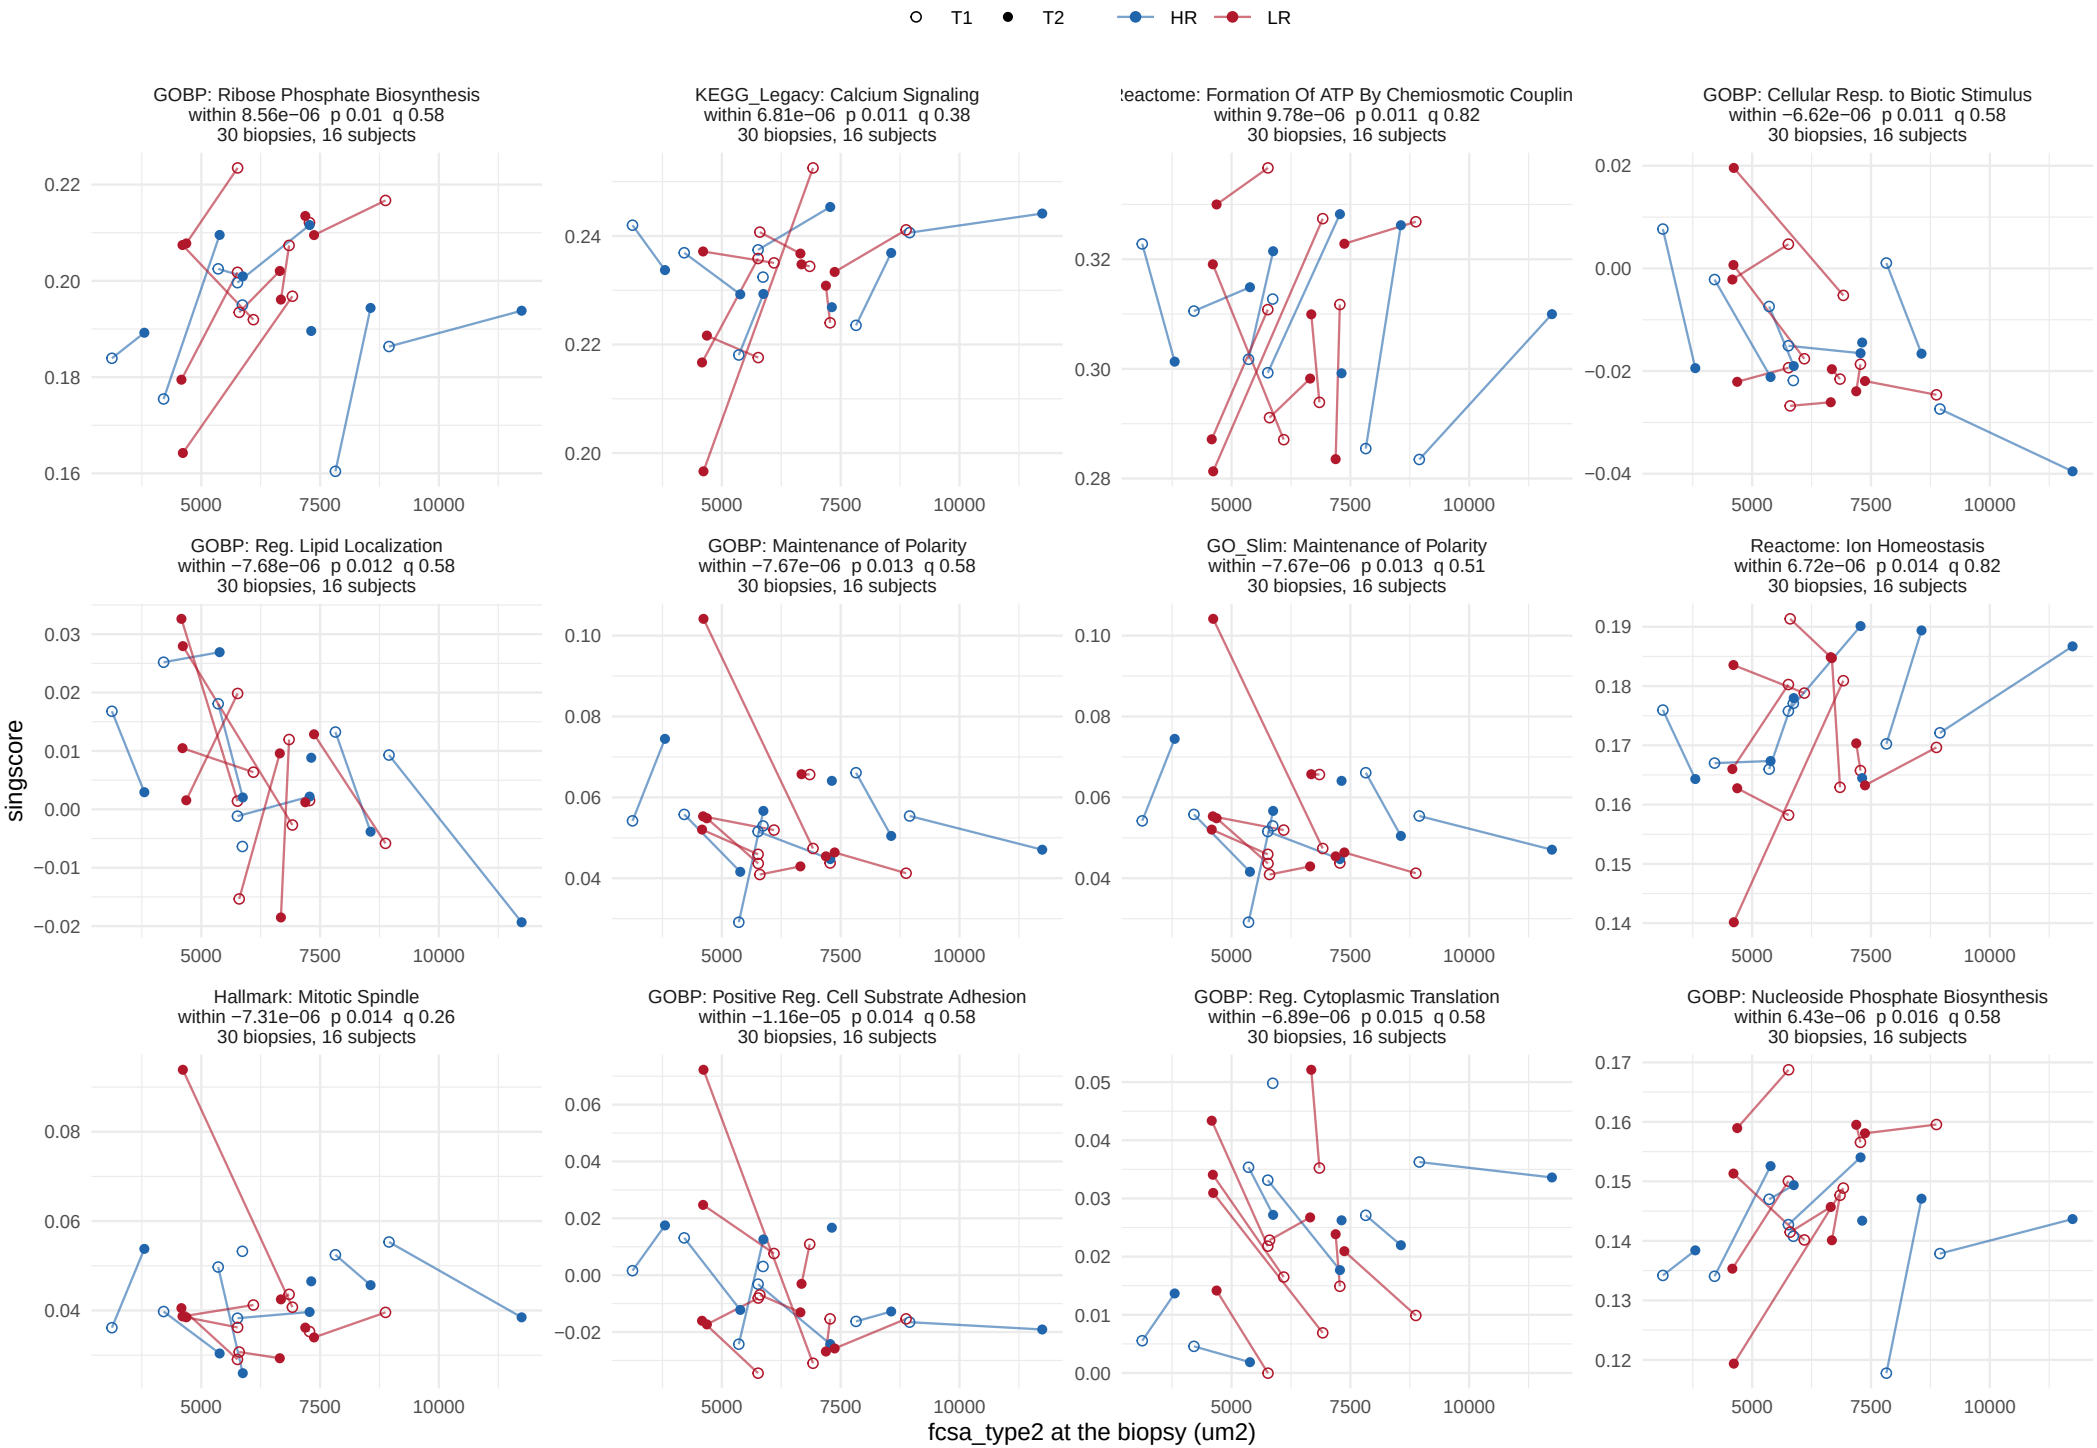


limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

## fcsa_type2, within−person term


94 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 3 of 8.

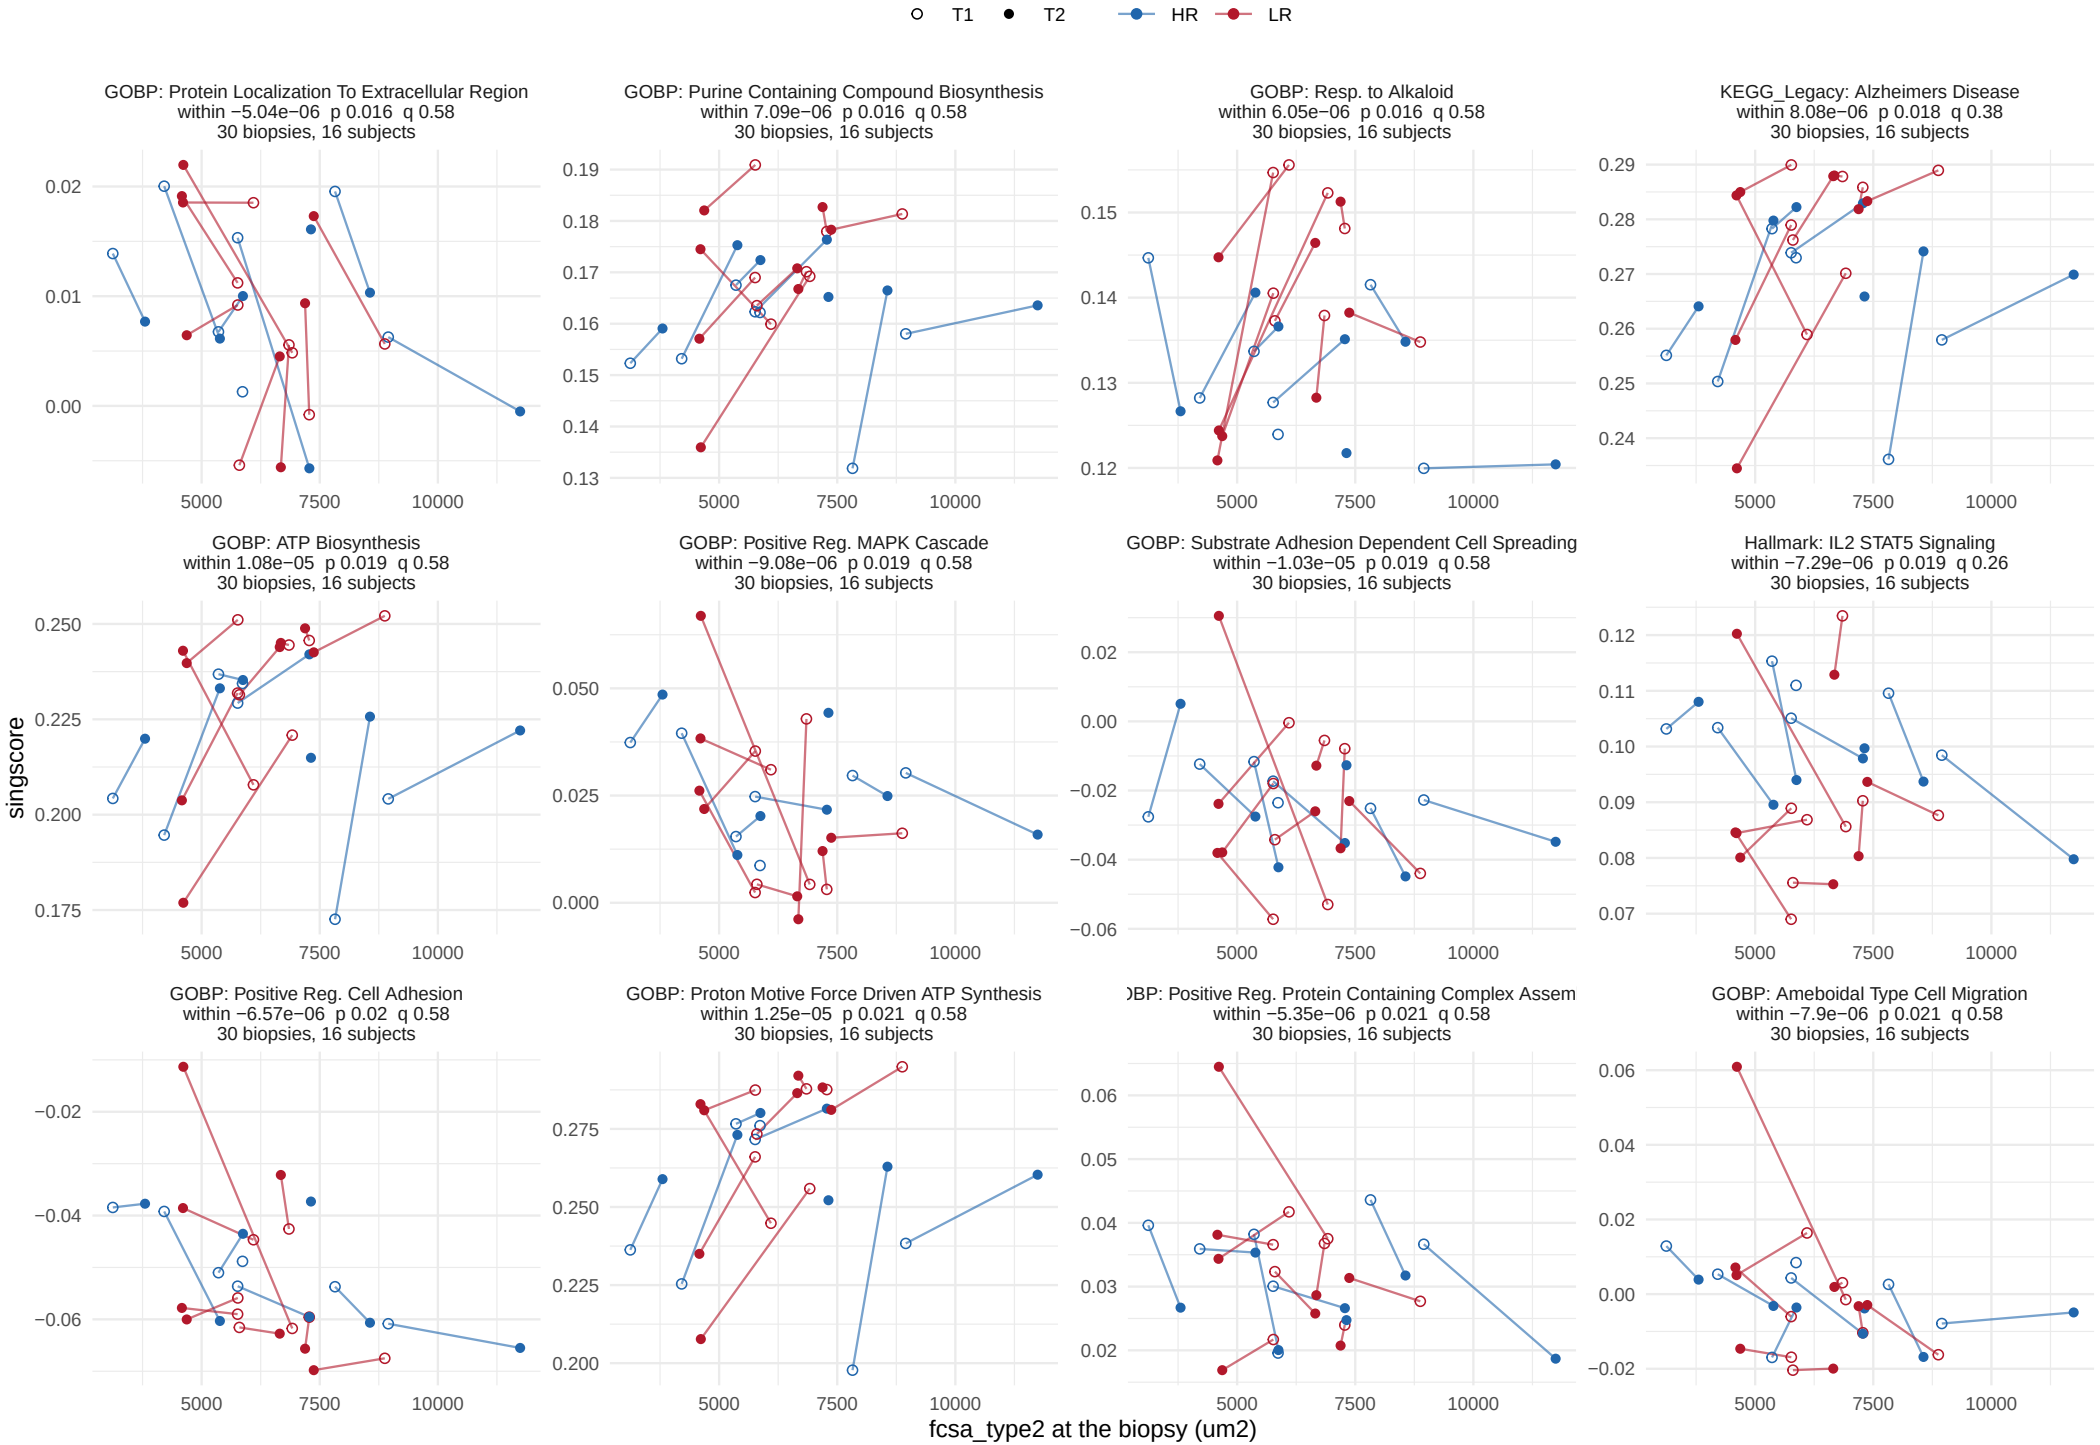


limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

## fcsa_type2, within−person term


94 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 4 of 8.

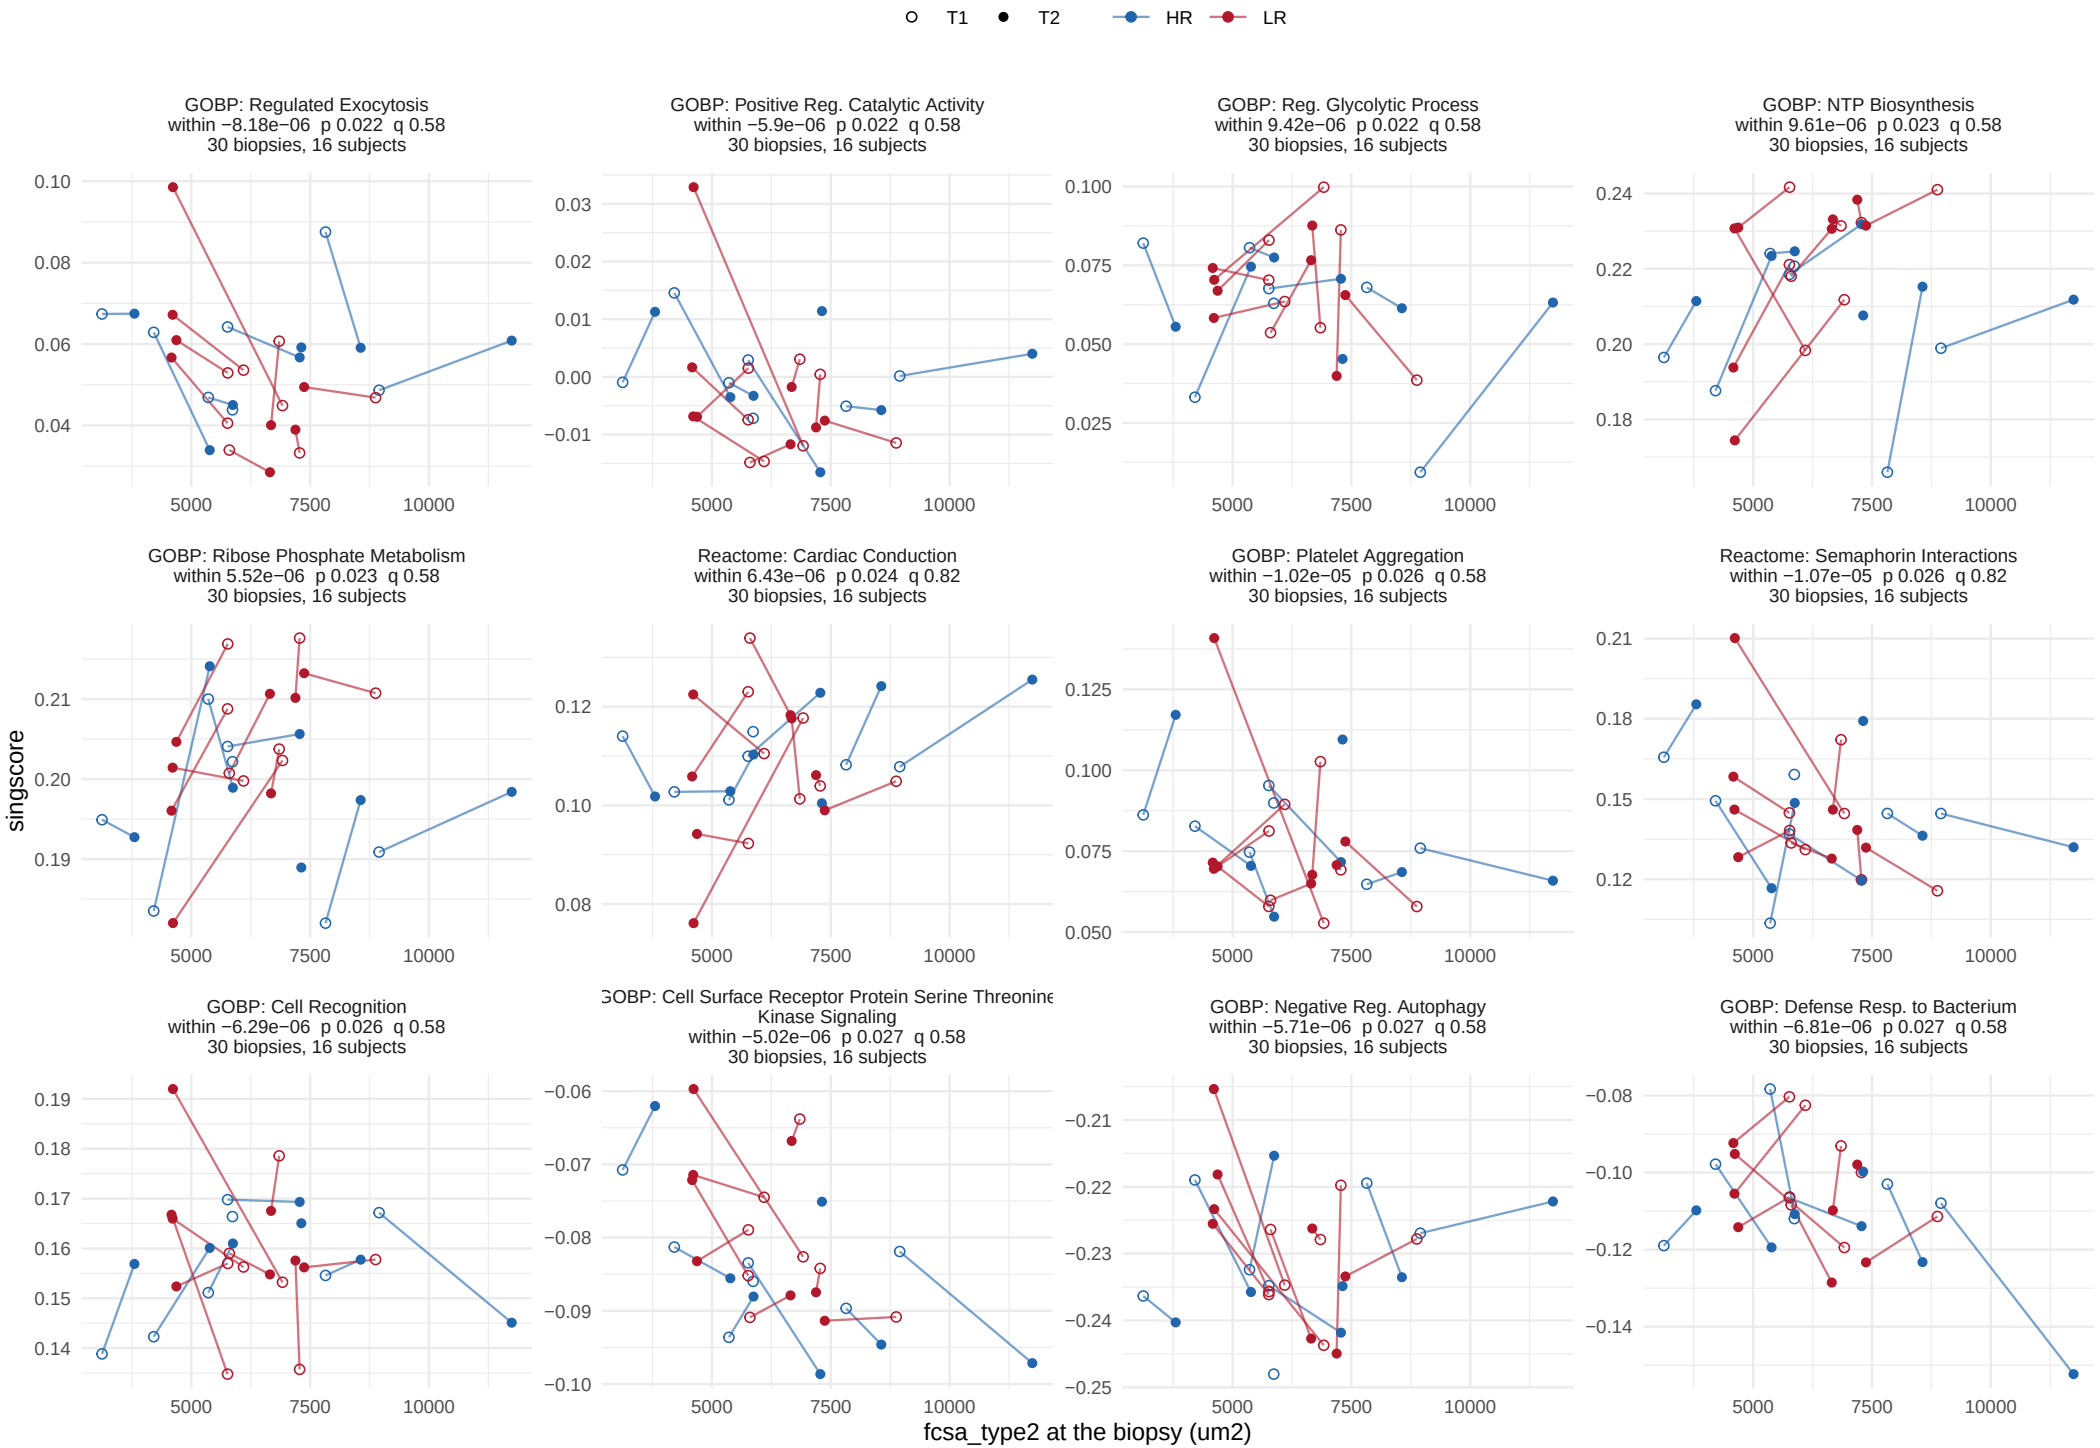


limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

## fcsa_type2, within−person term


94 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 5 of 8.

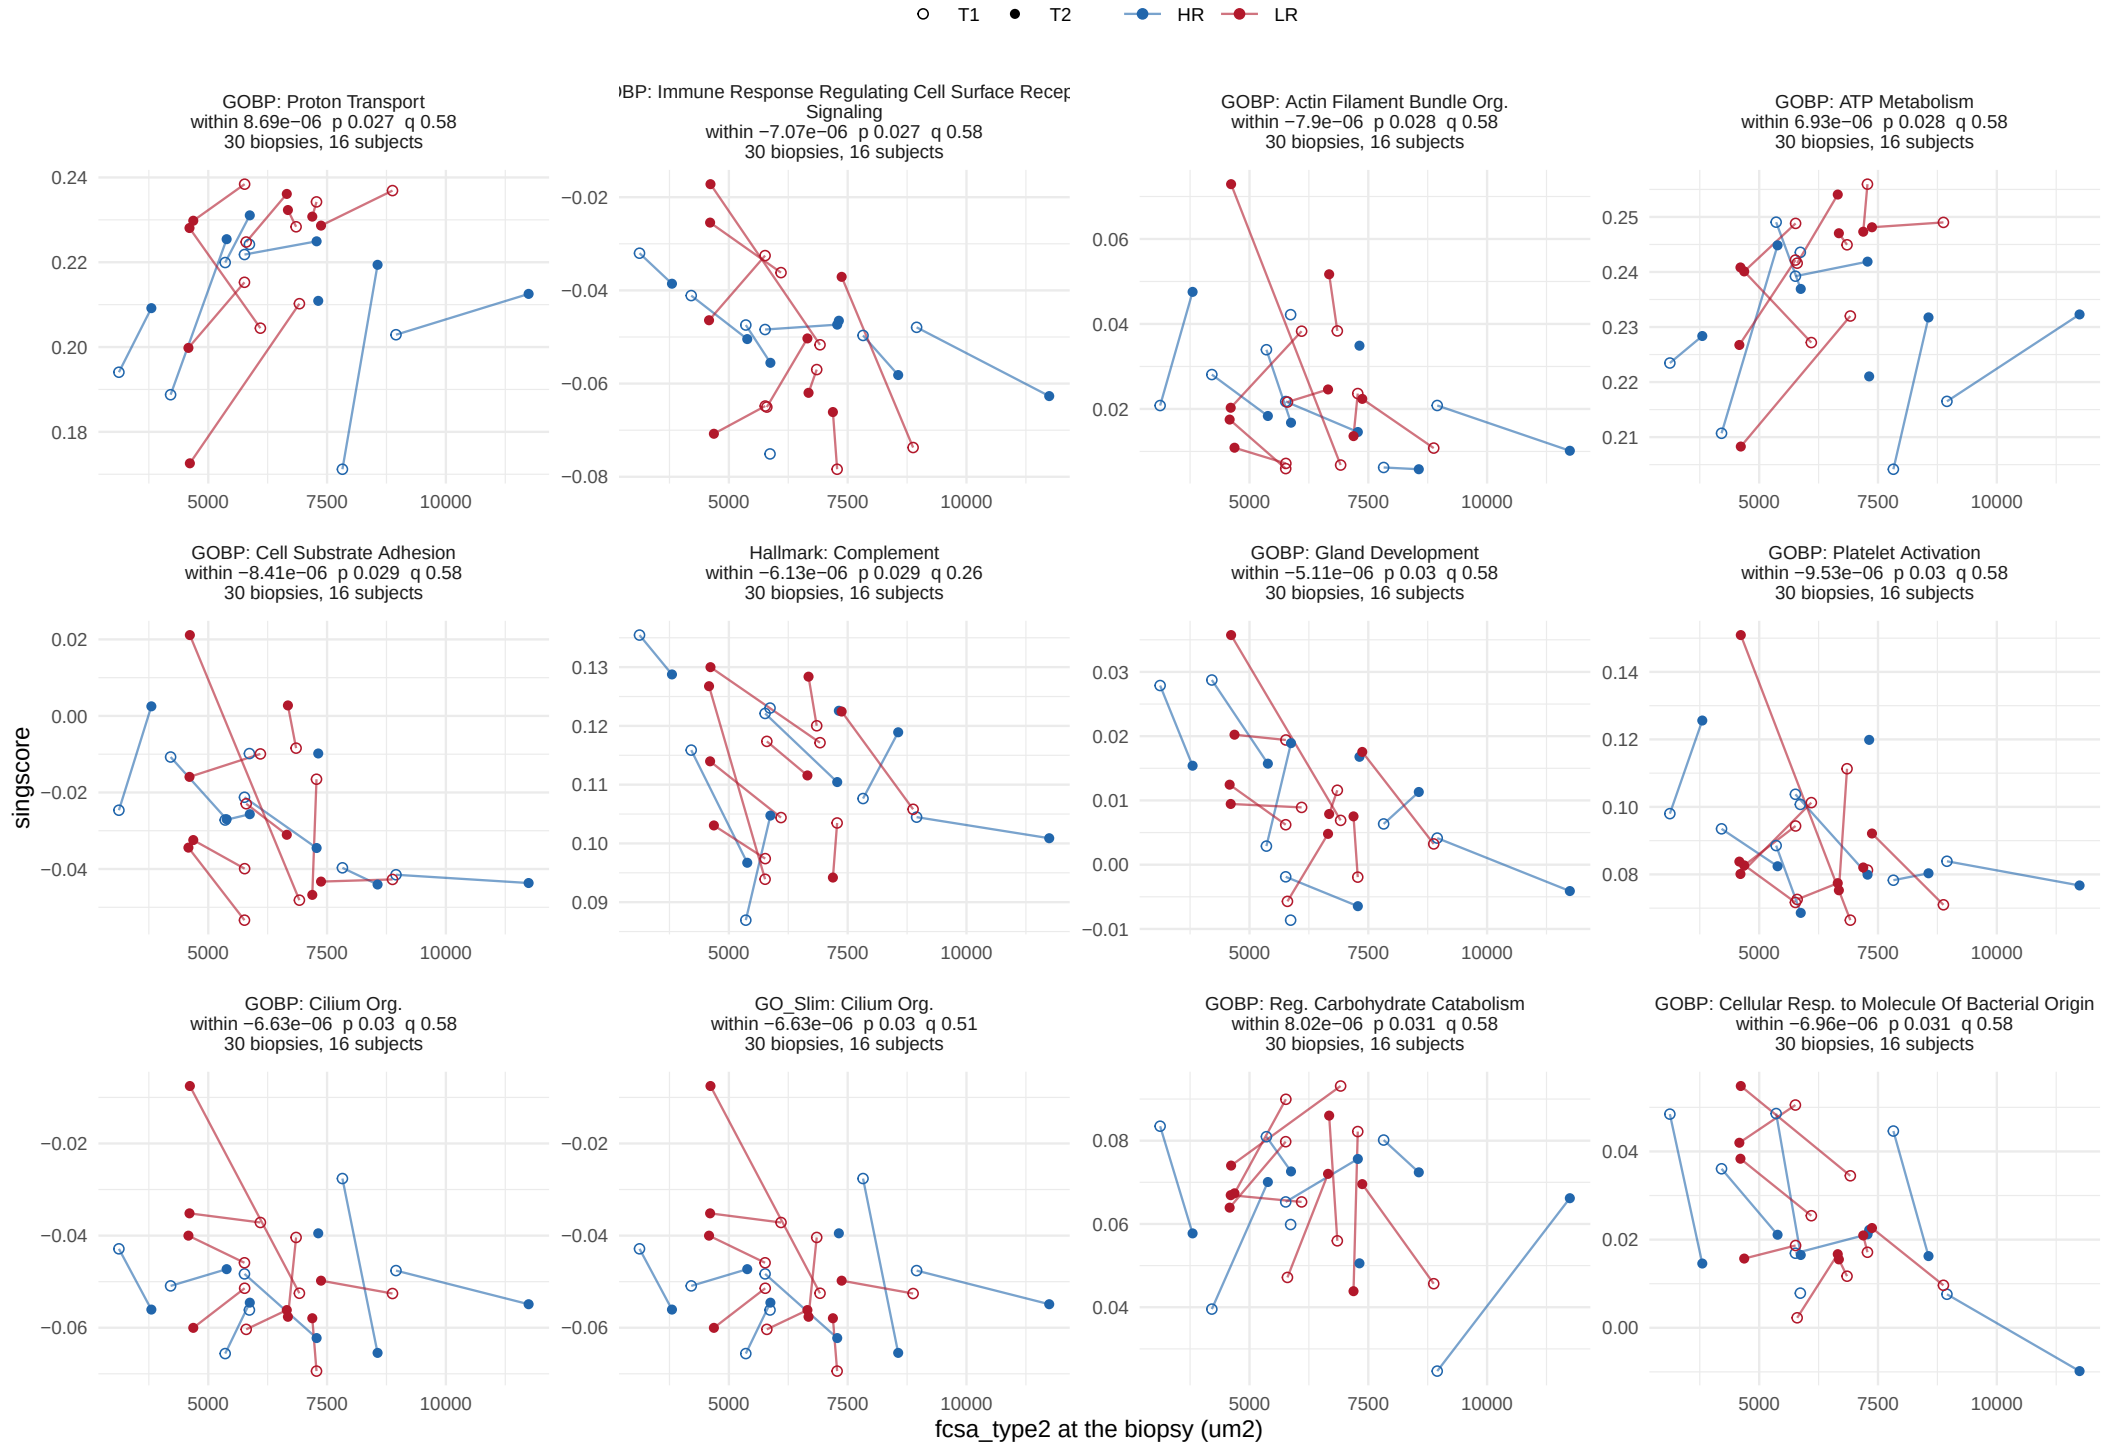


limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

## fcsa_type2, within−person term


94 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 6 of 8.

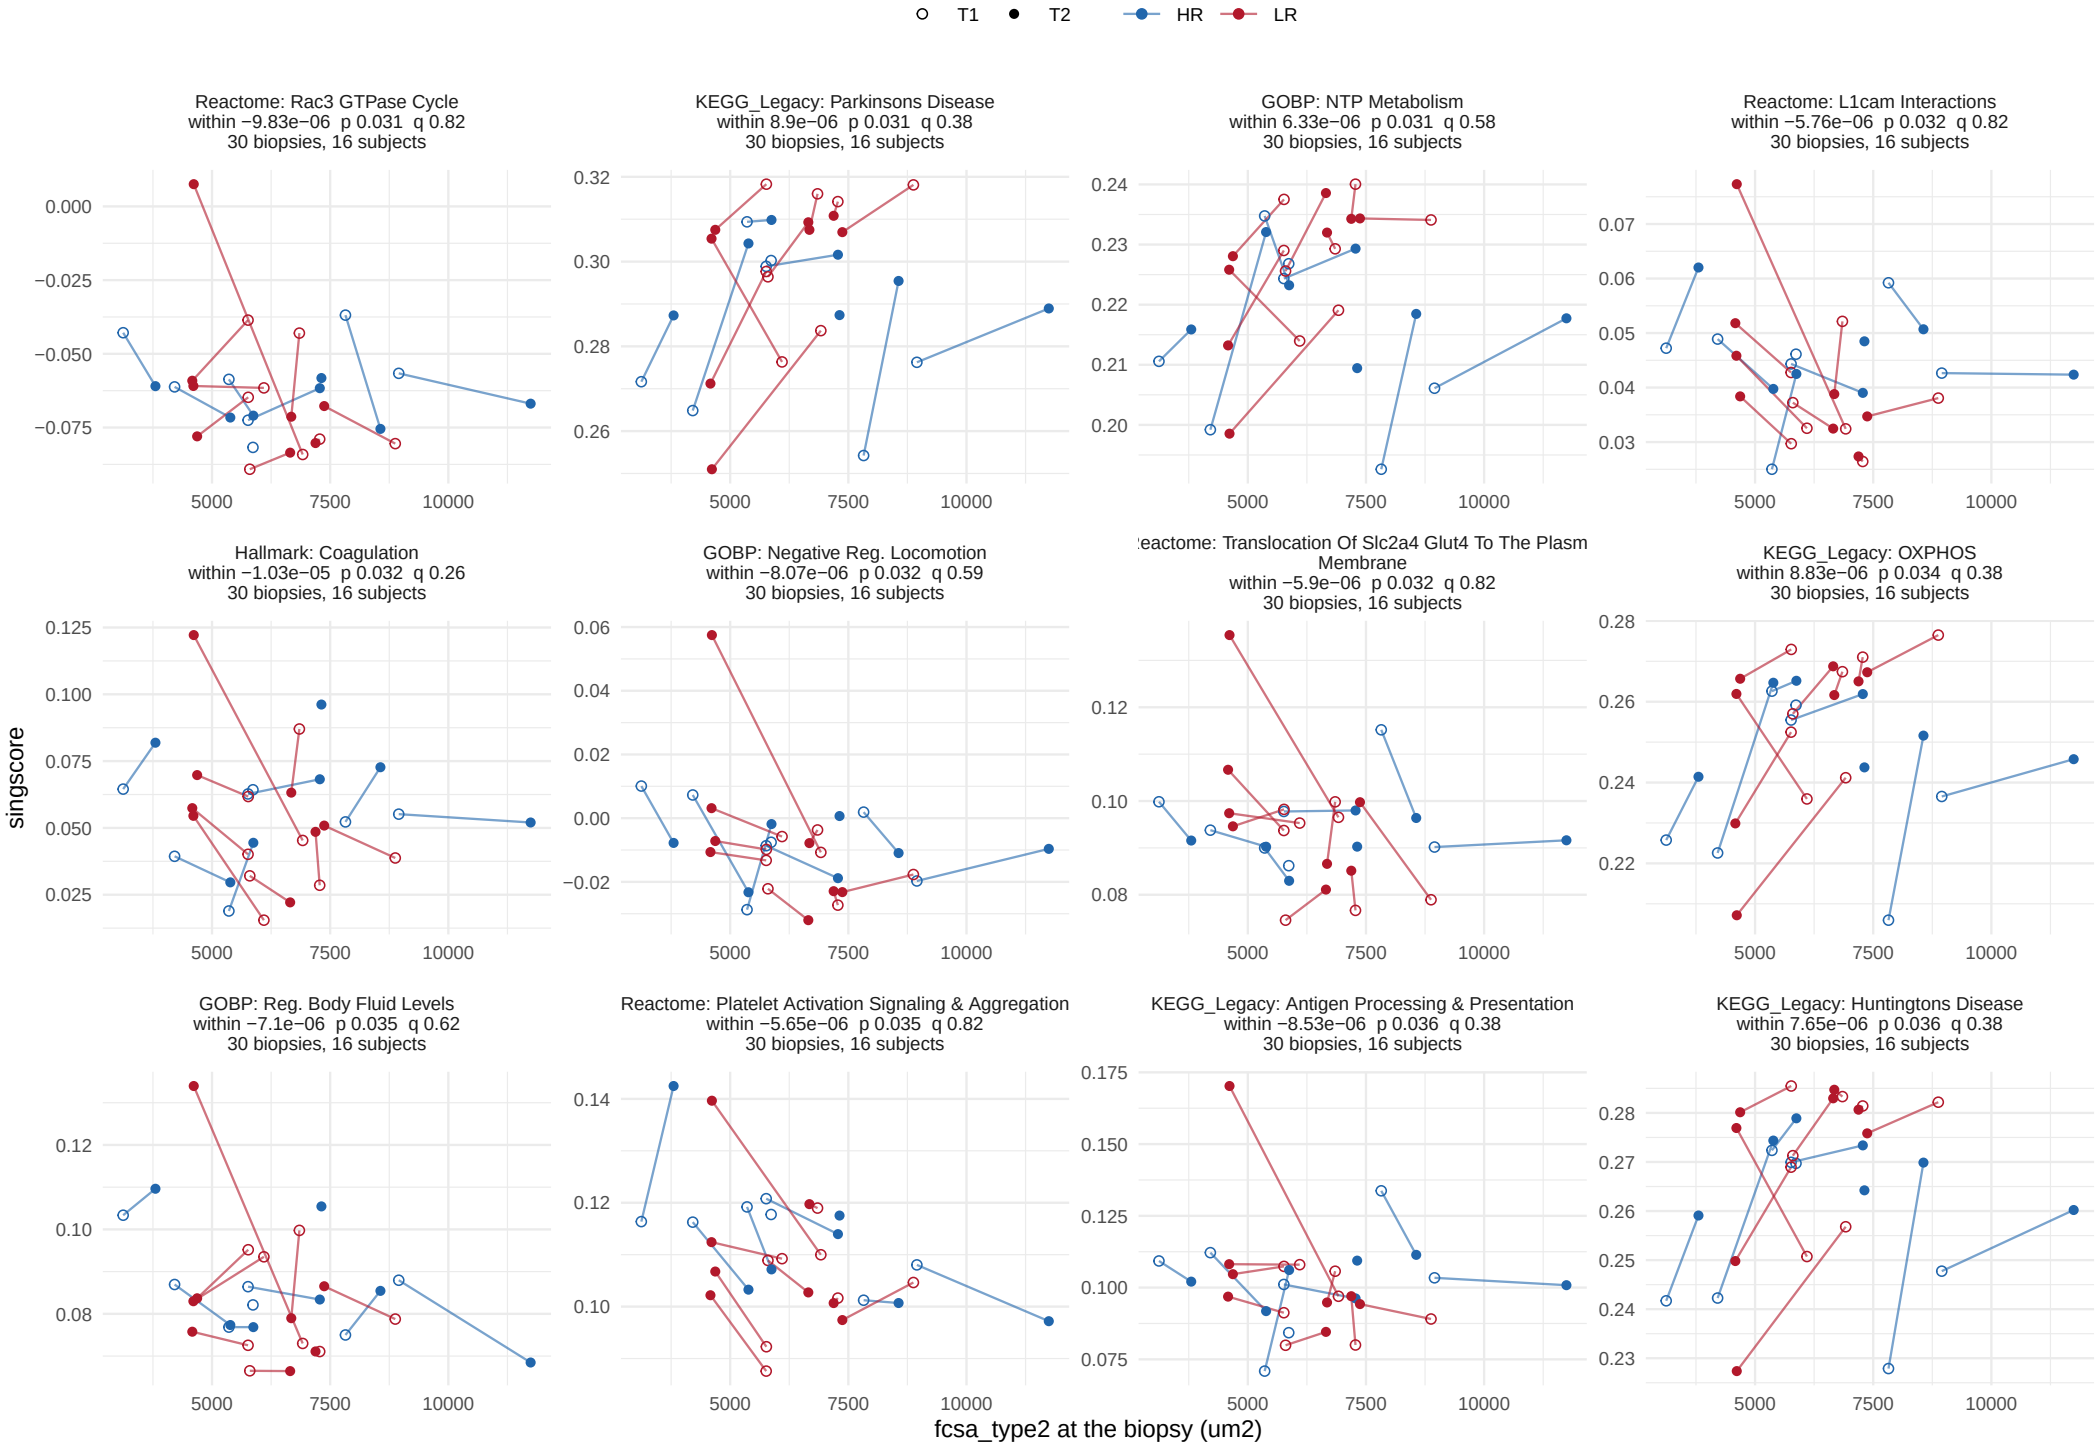


limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

## fcsa_type2, within−person term


94 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 7 of 8.

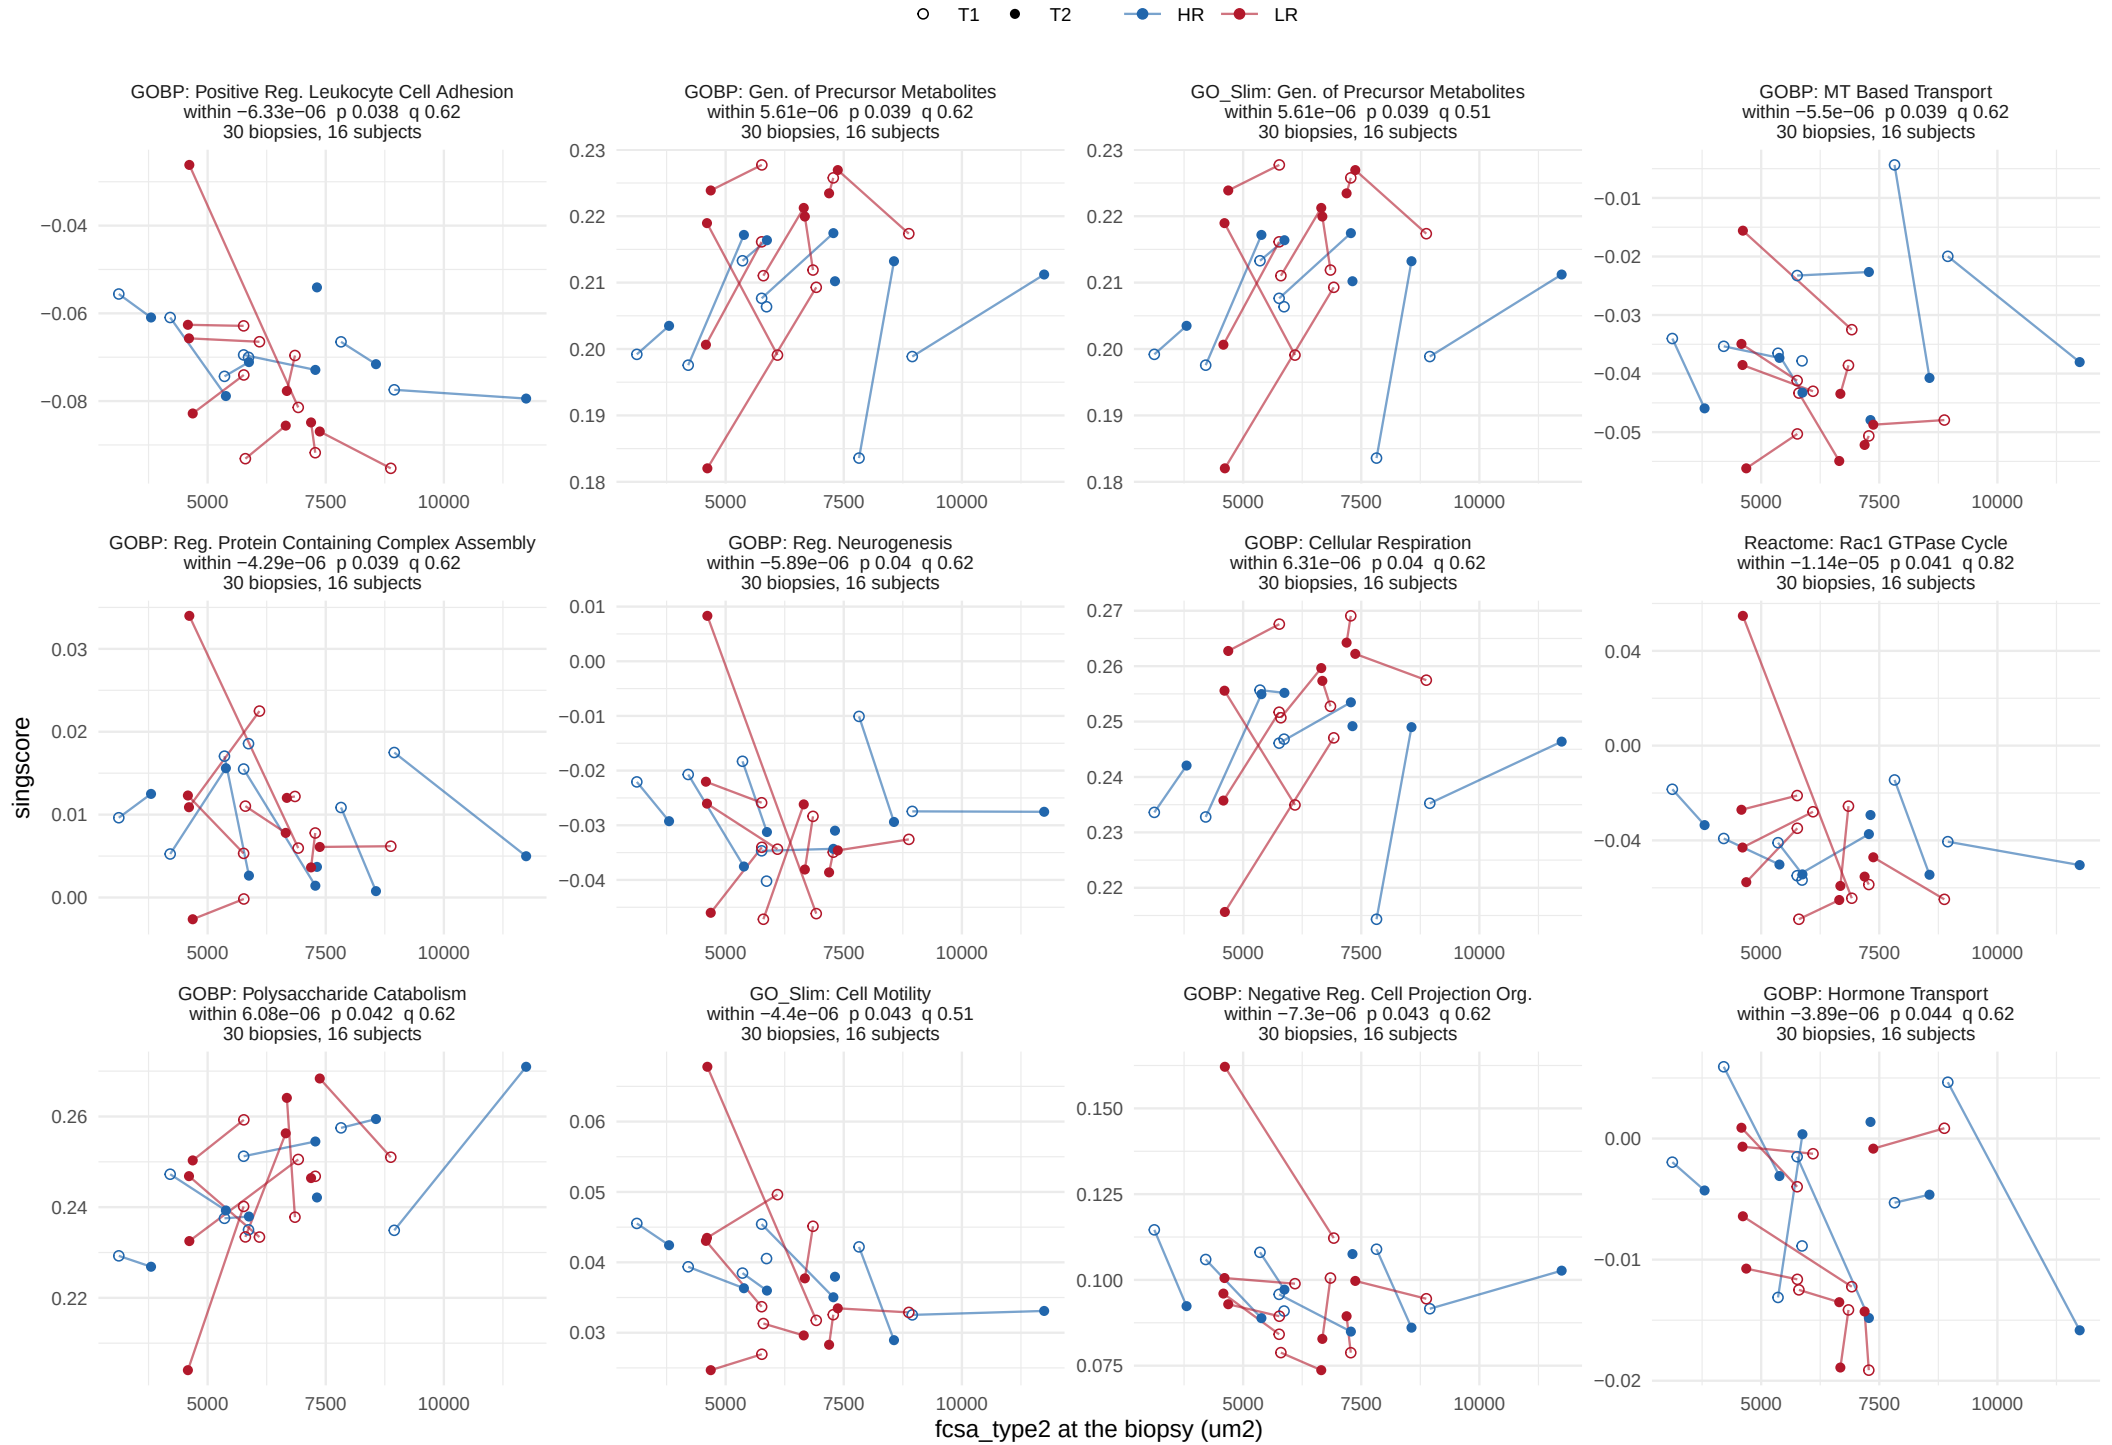


limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

## fcsa_type2, within−person term


94 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 8 of 8.

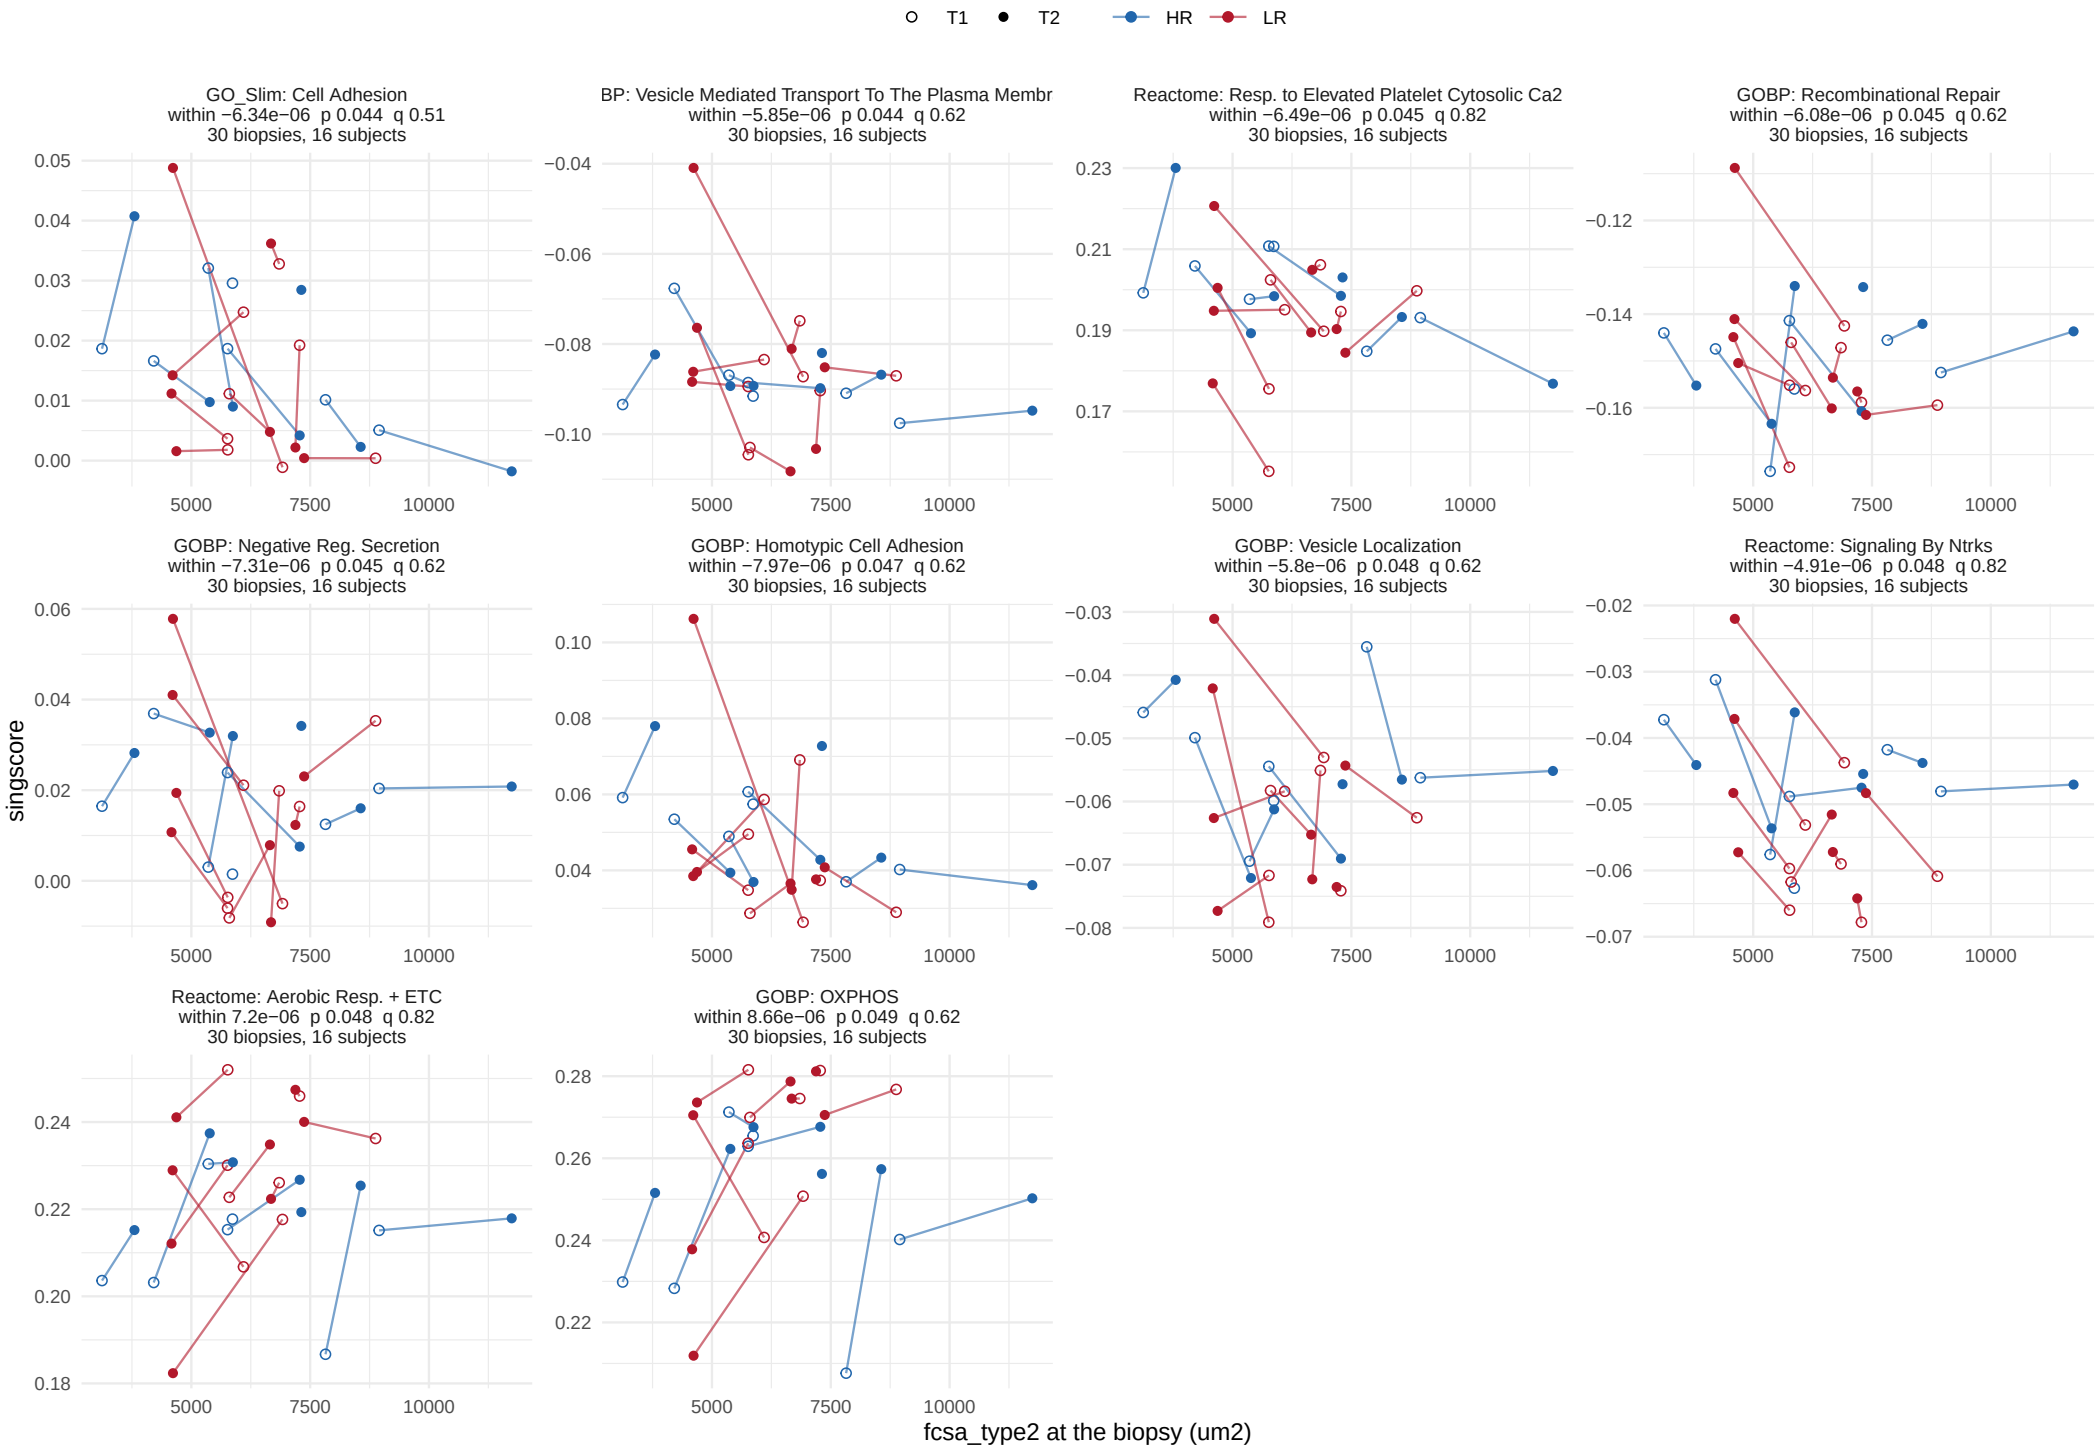


limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

## fcsa_type2, between−person term


81 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 1 of 7.

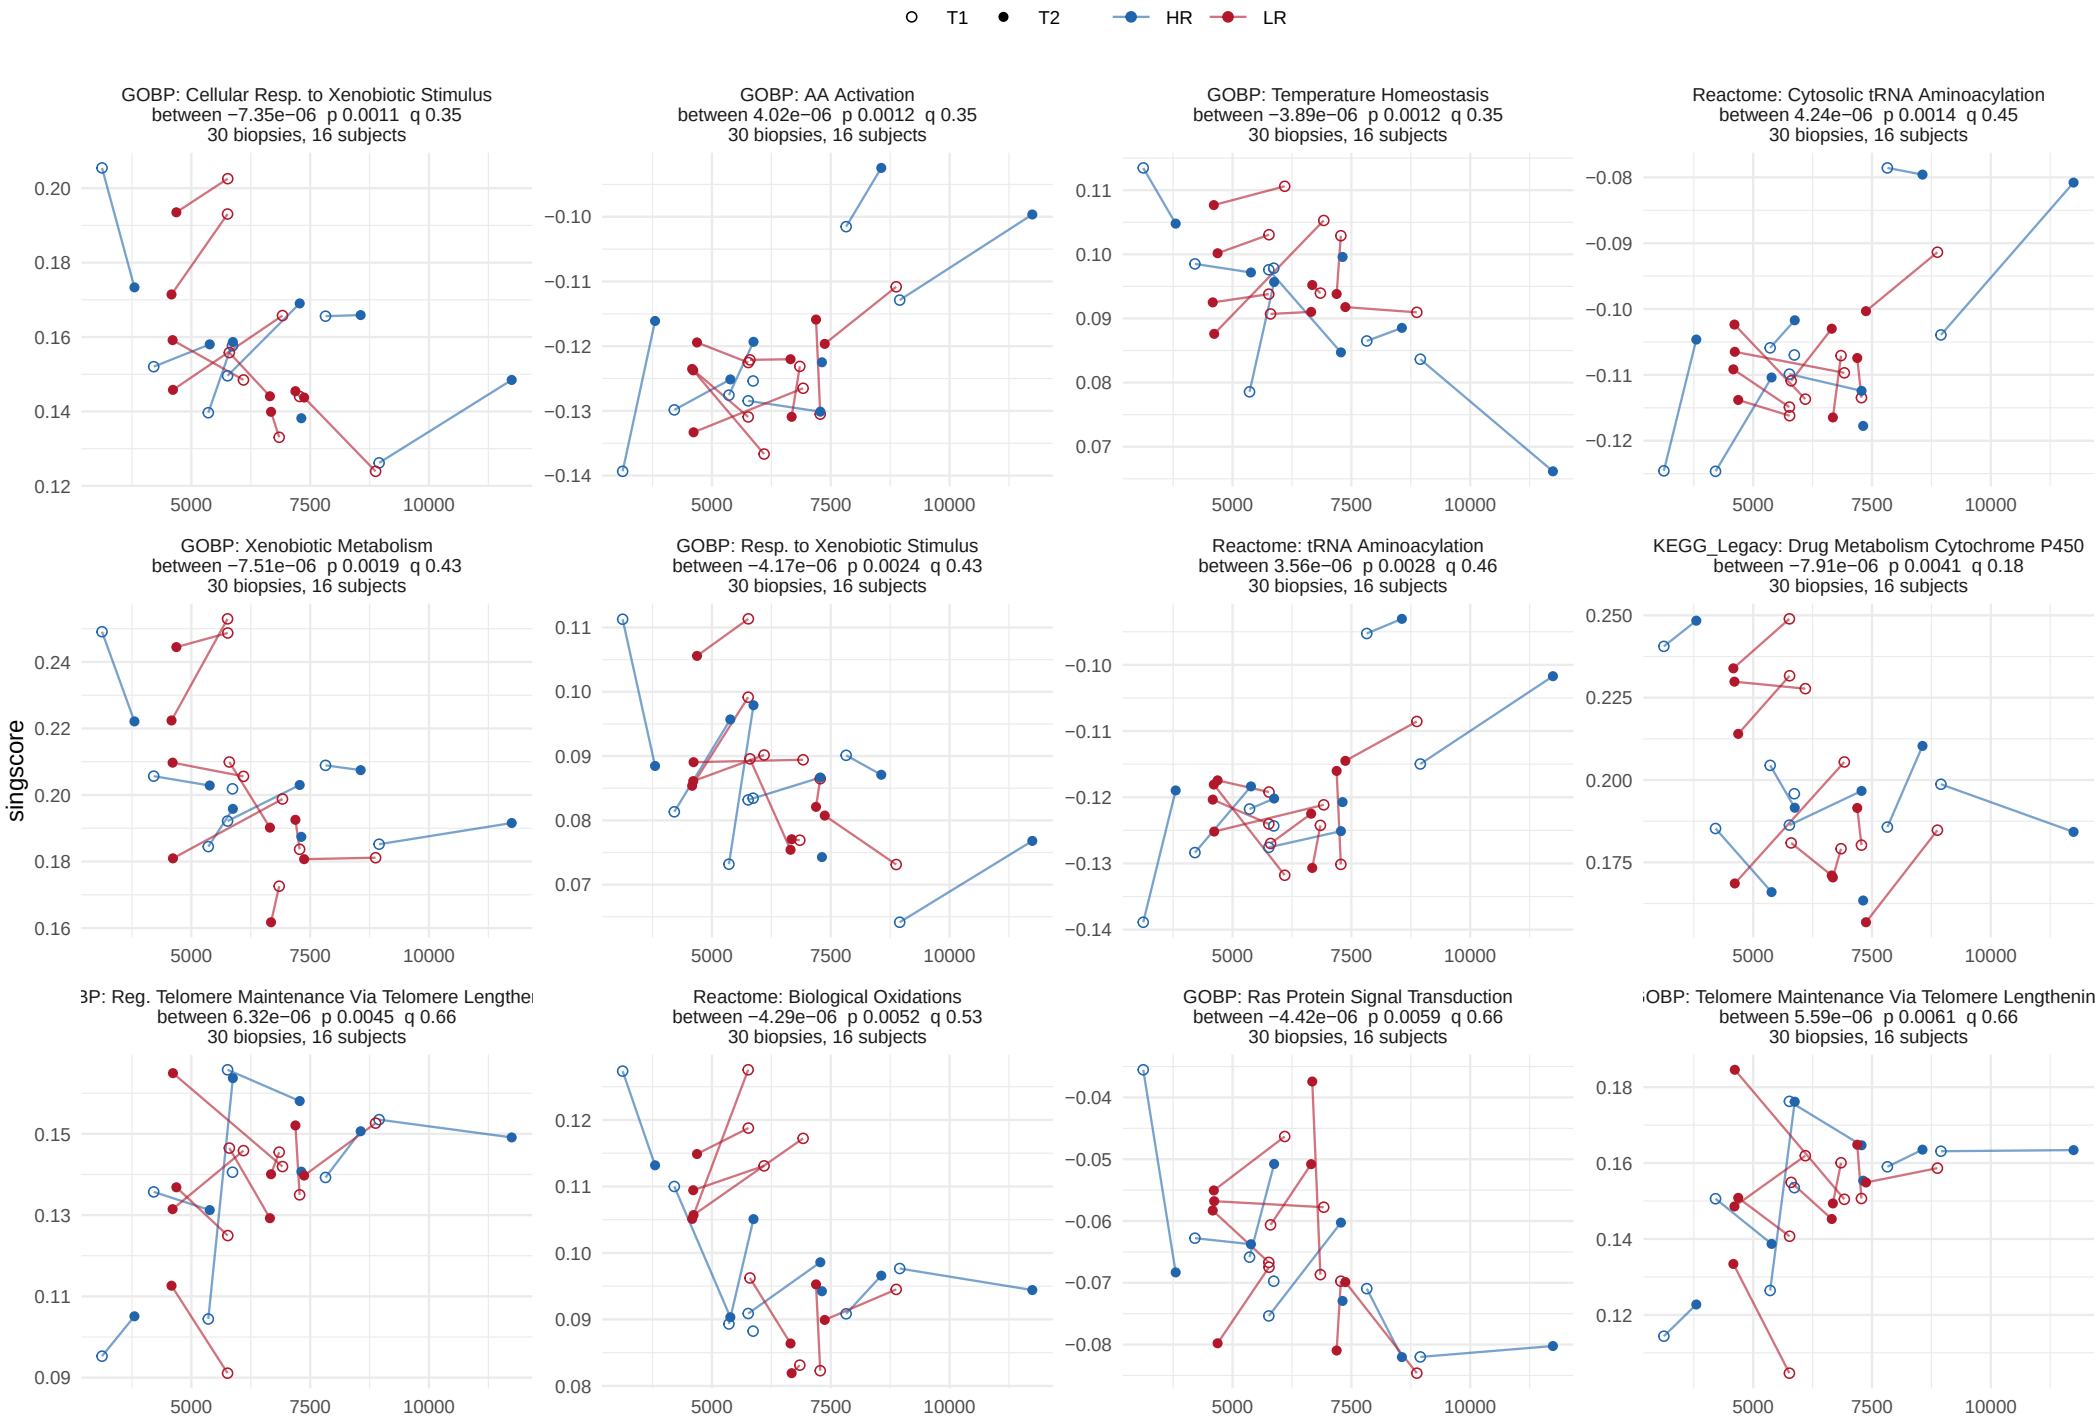


limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

## fcsa_type2, between−person term


81 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 2 of 7.

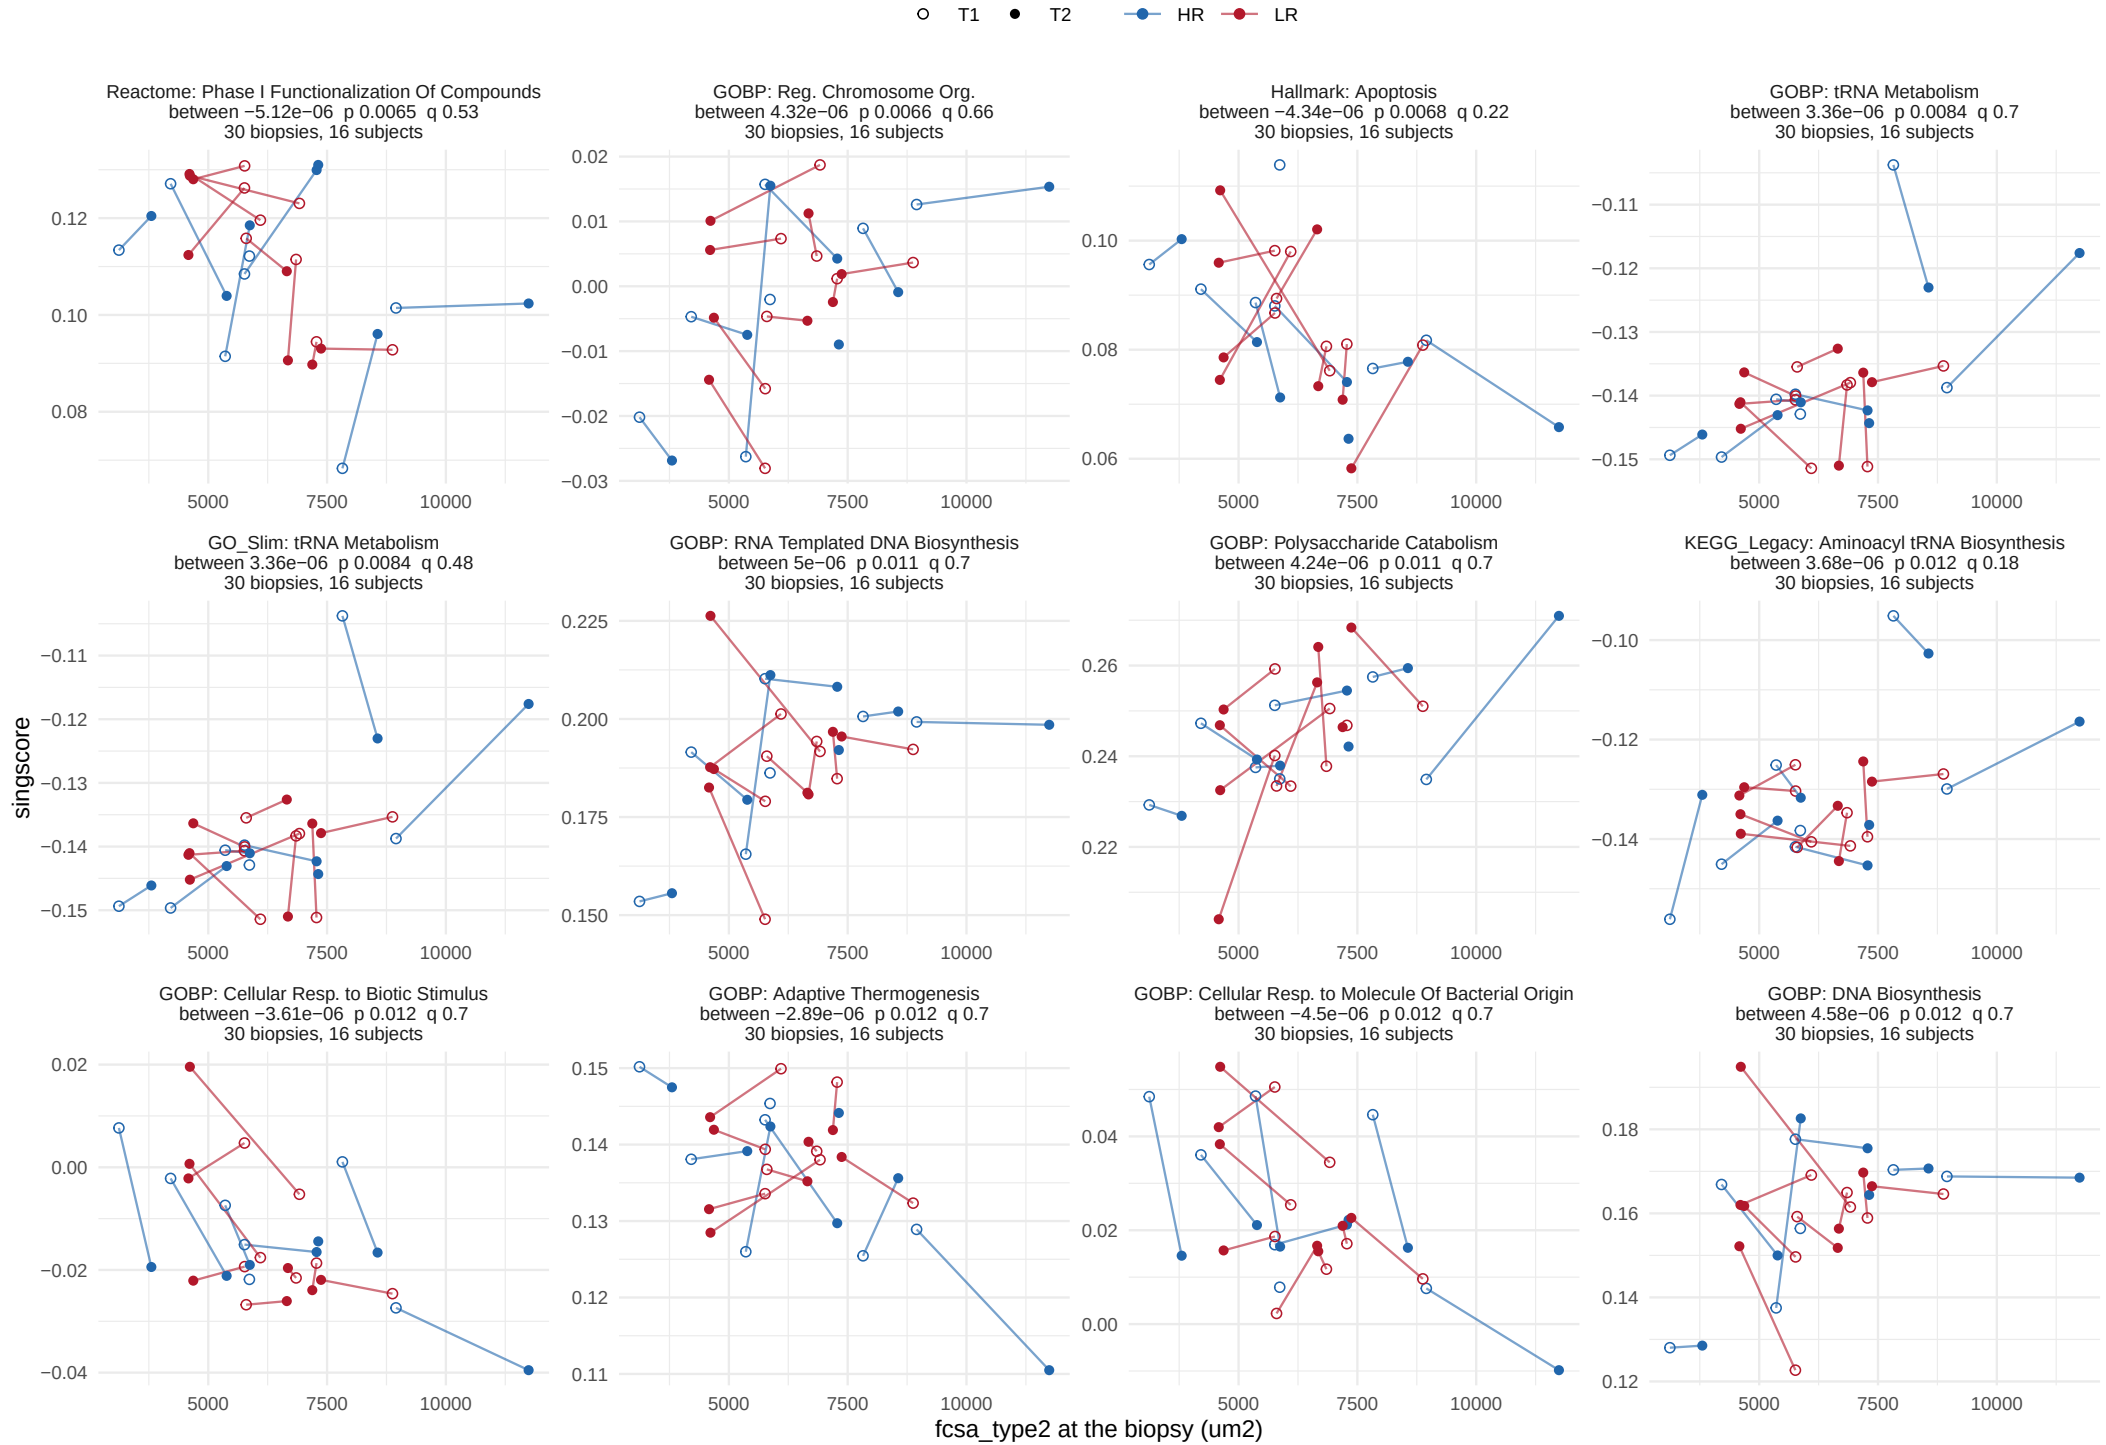


limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

## fcsa_type2, between−person term


81 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 3 of 7.

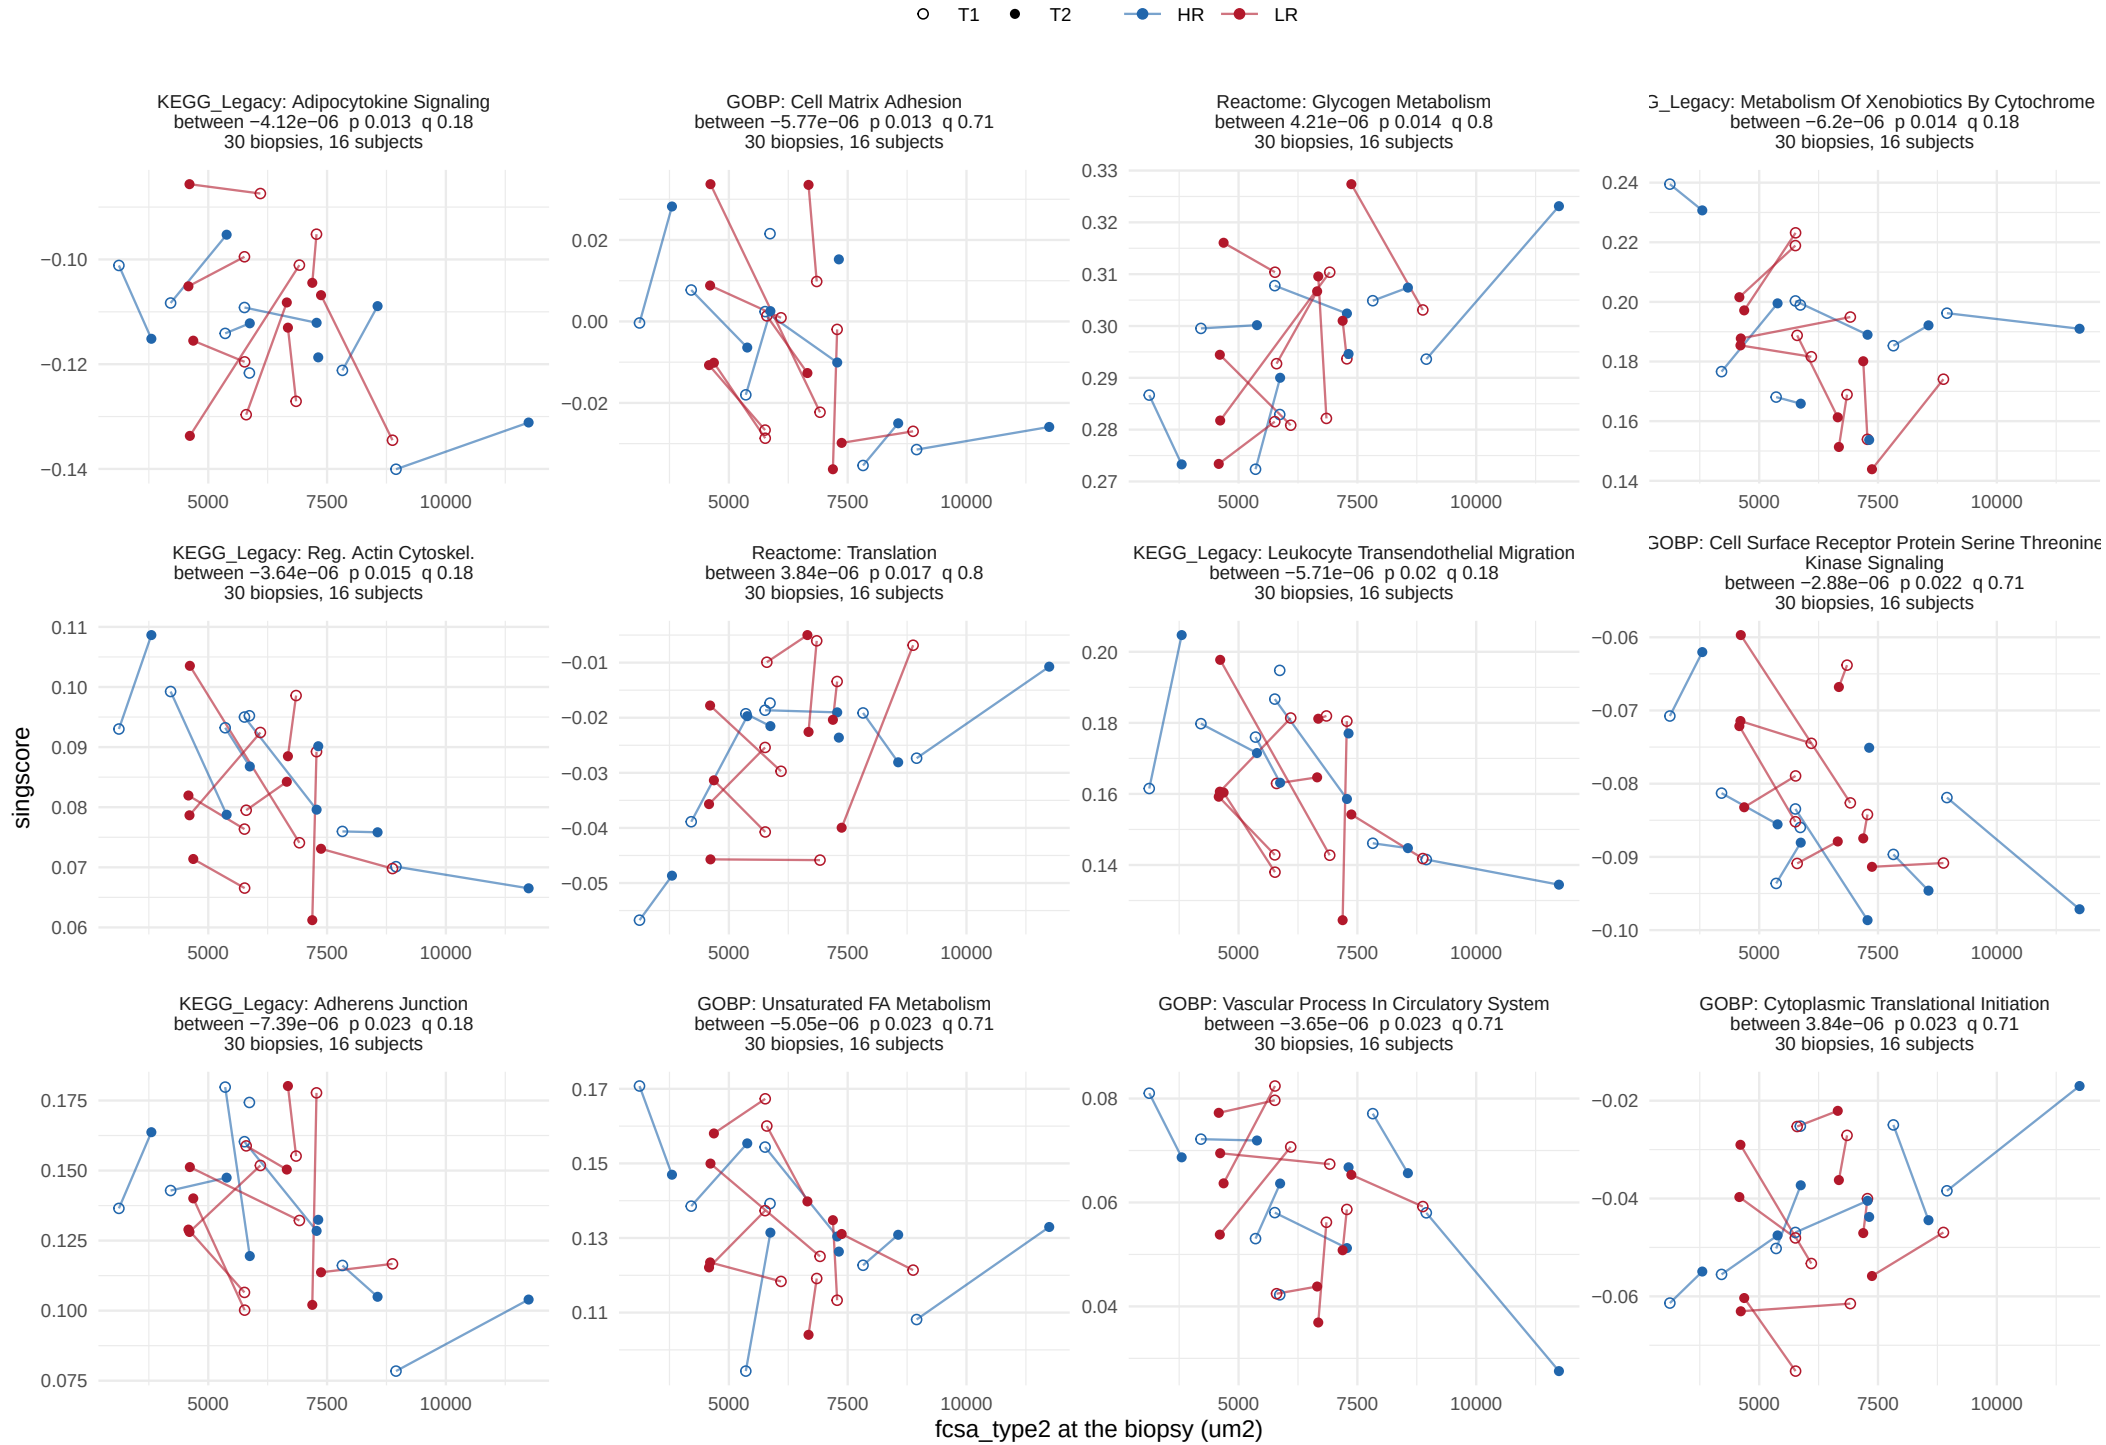


limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

## fcsa_type2, between−person term


81 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 4 of 7.

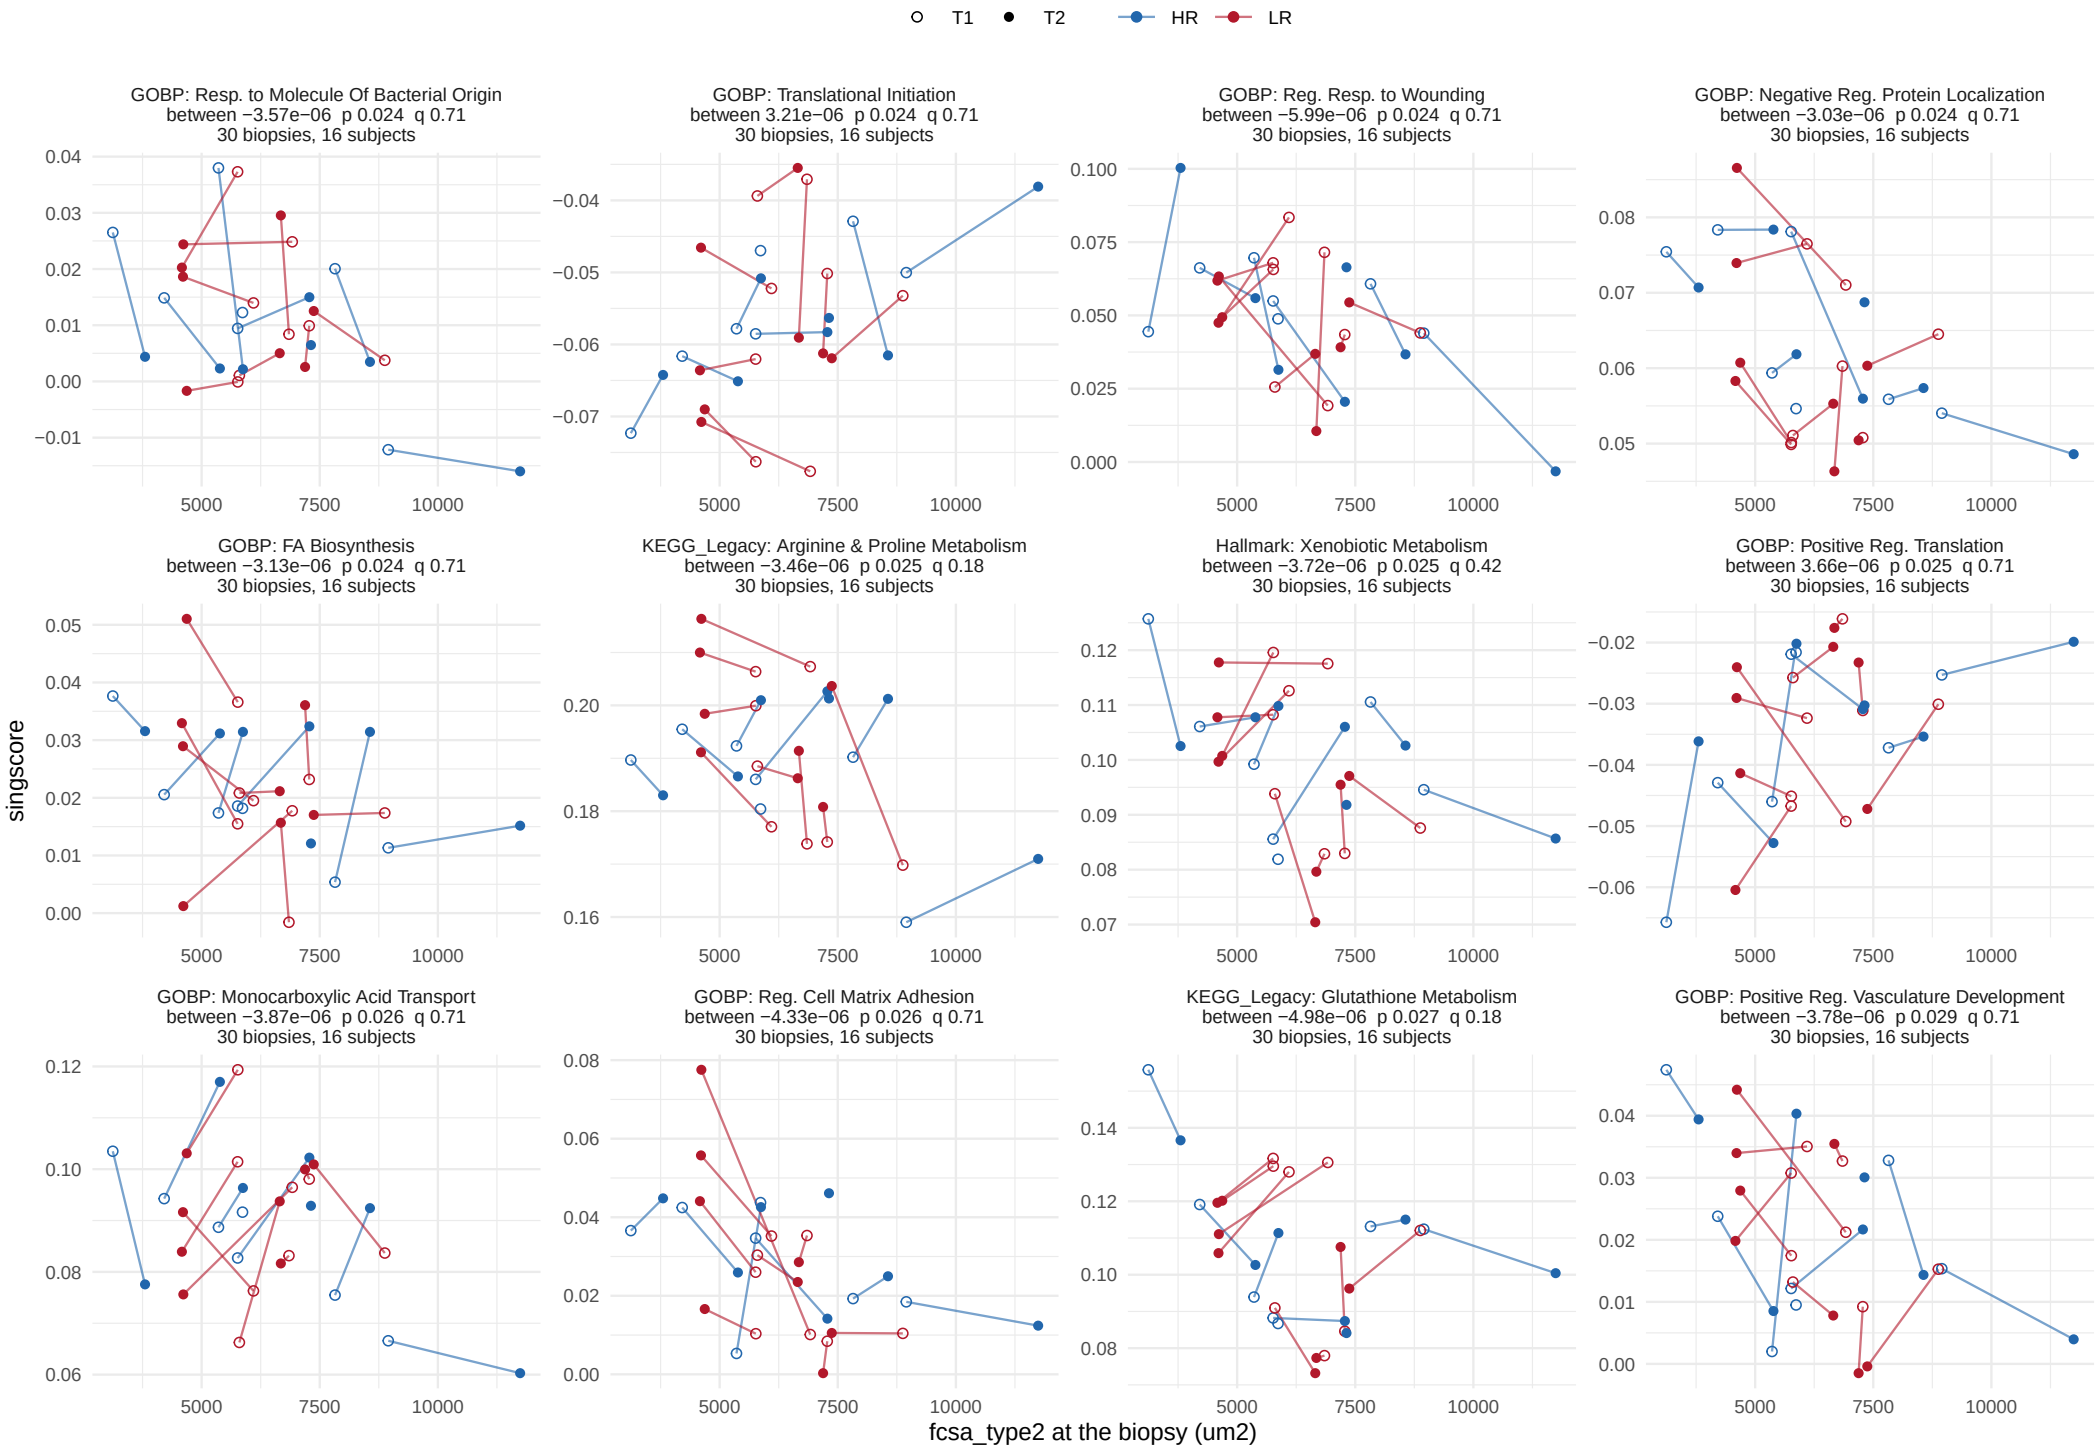


limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

## fcsa_type2, between−person term


81 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 5 of 7.

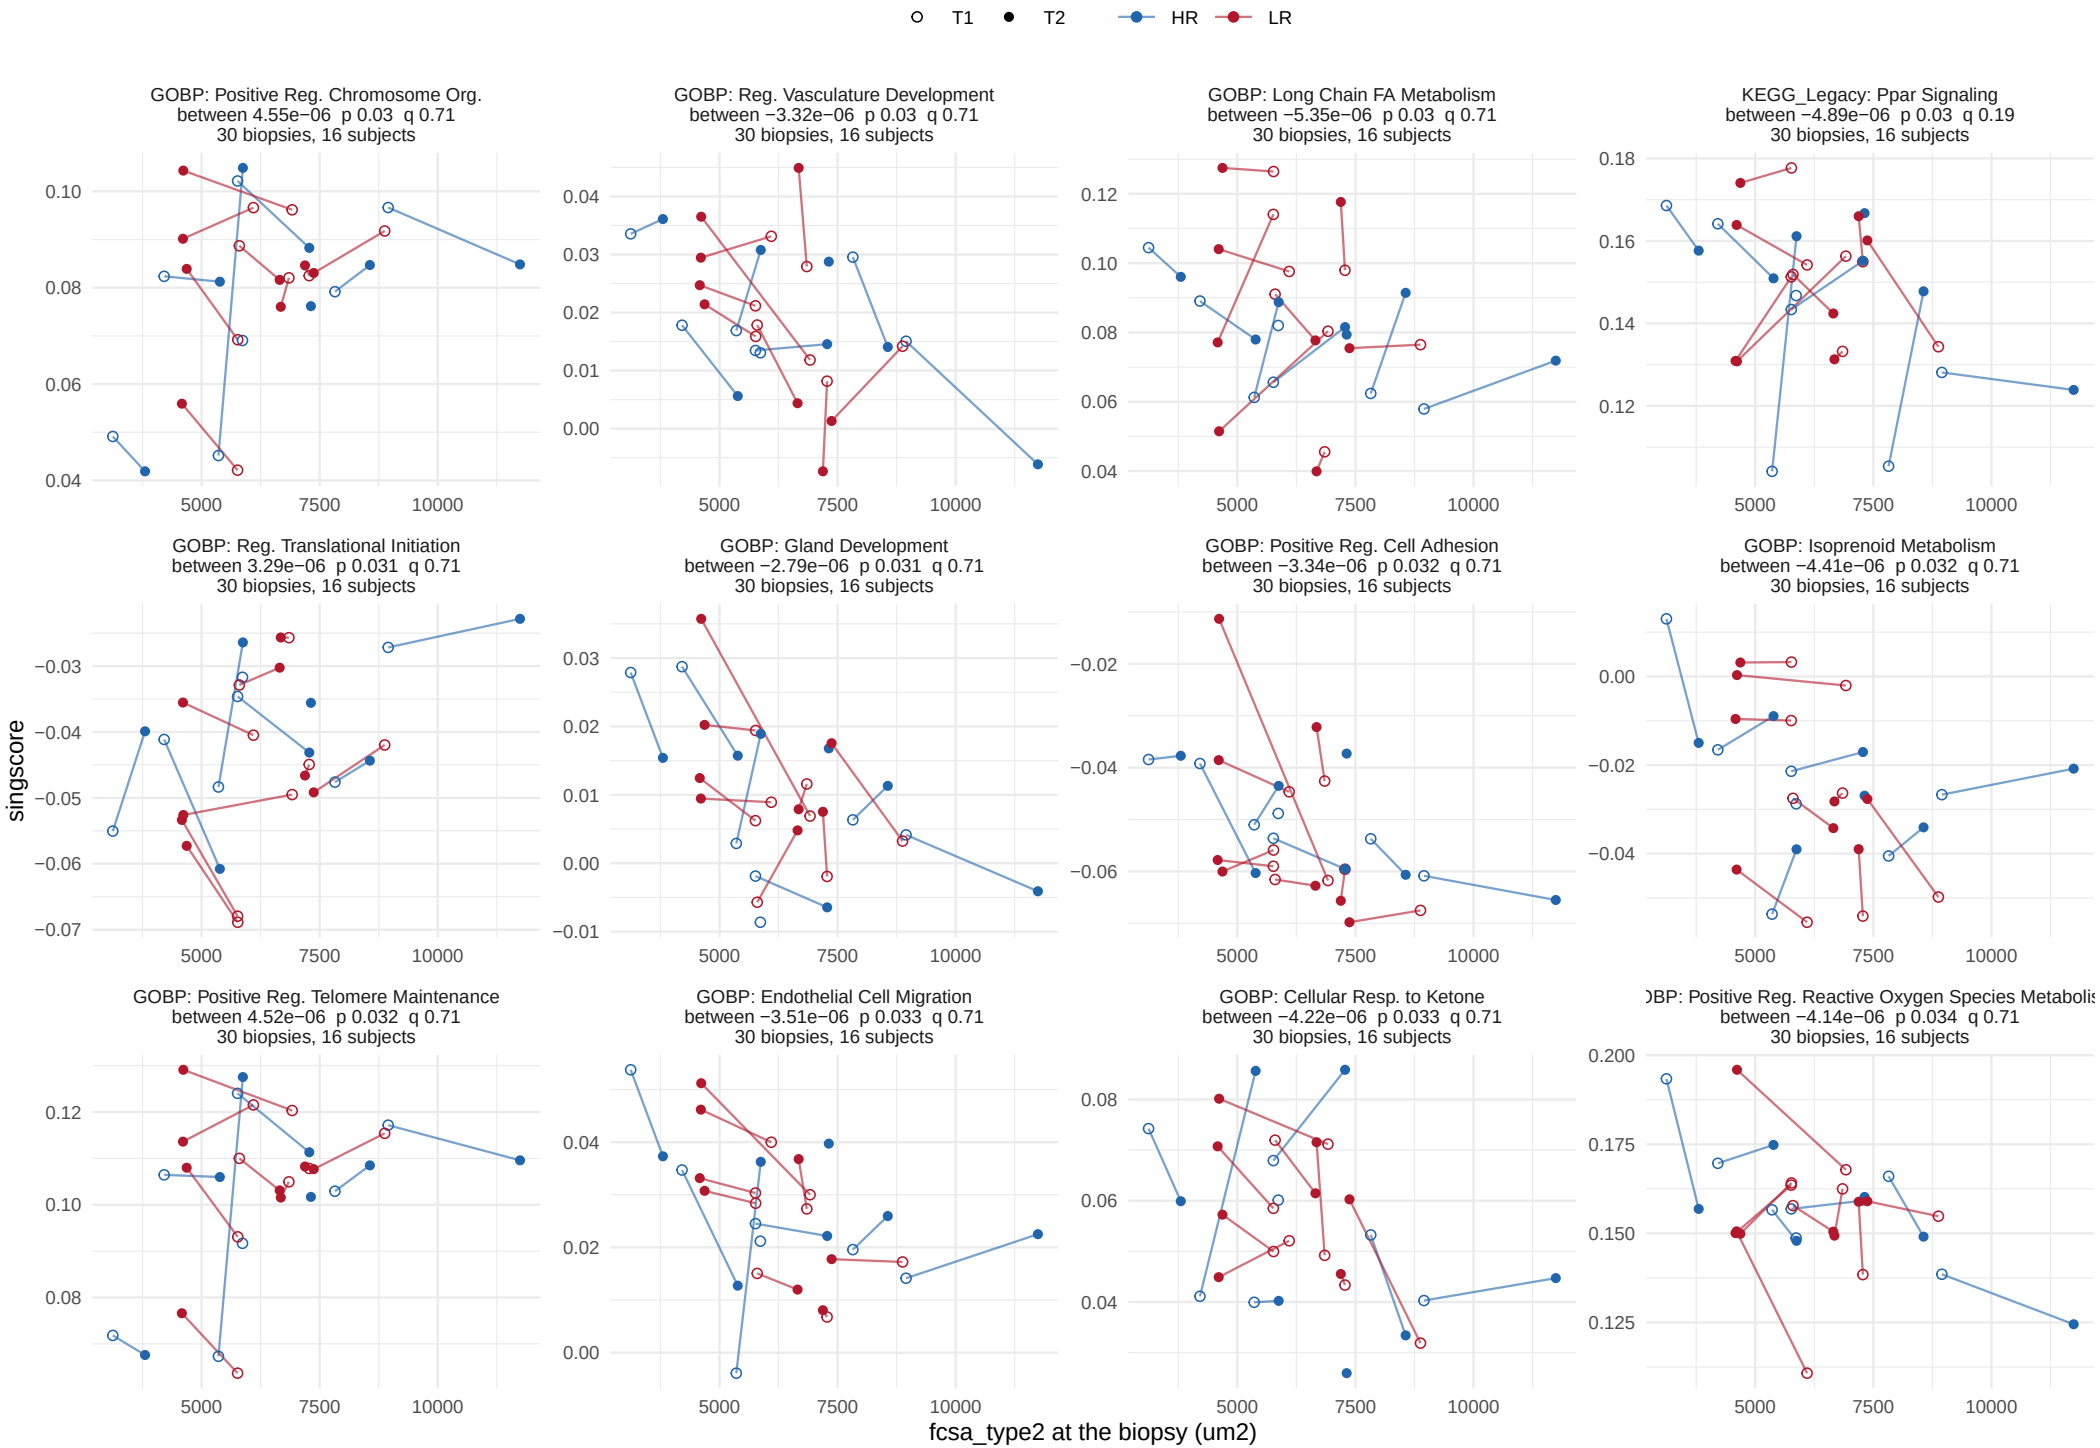


limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

## fcsa_type2, between−person term


81 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 6 of 7.

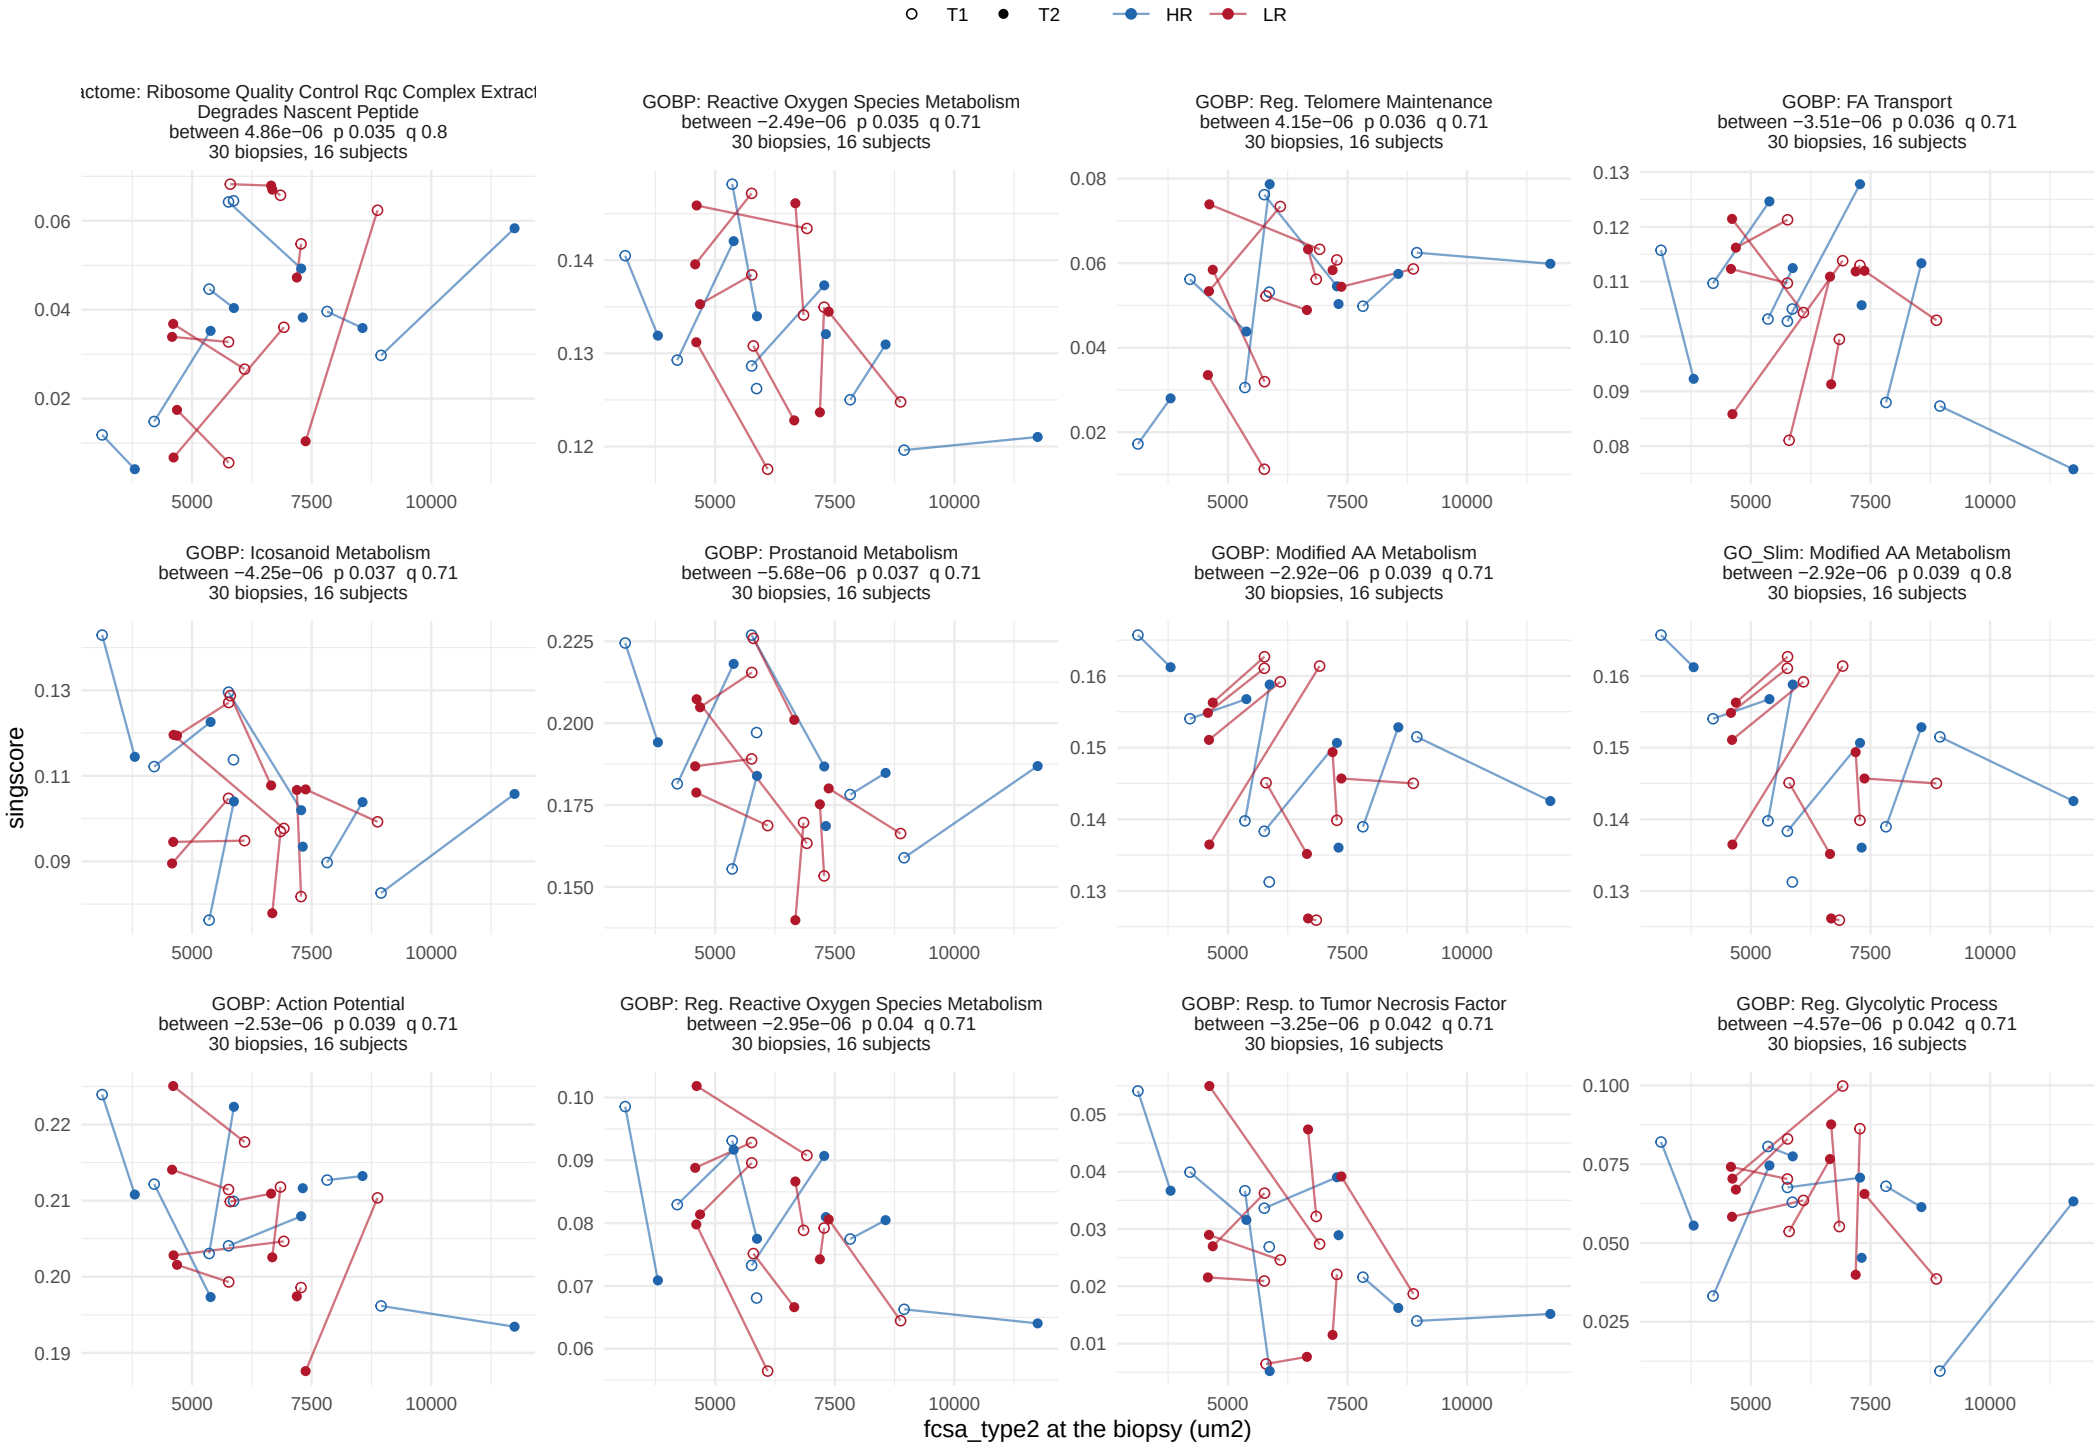


limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

## fcsa_type2, between−person term


81 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 7 of 7.

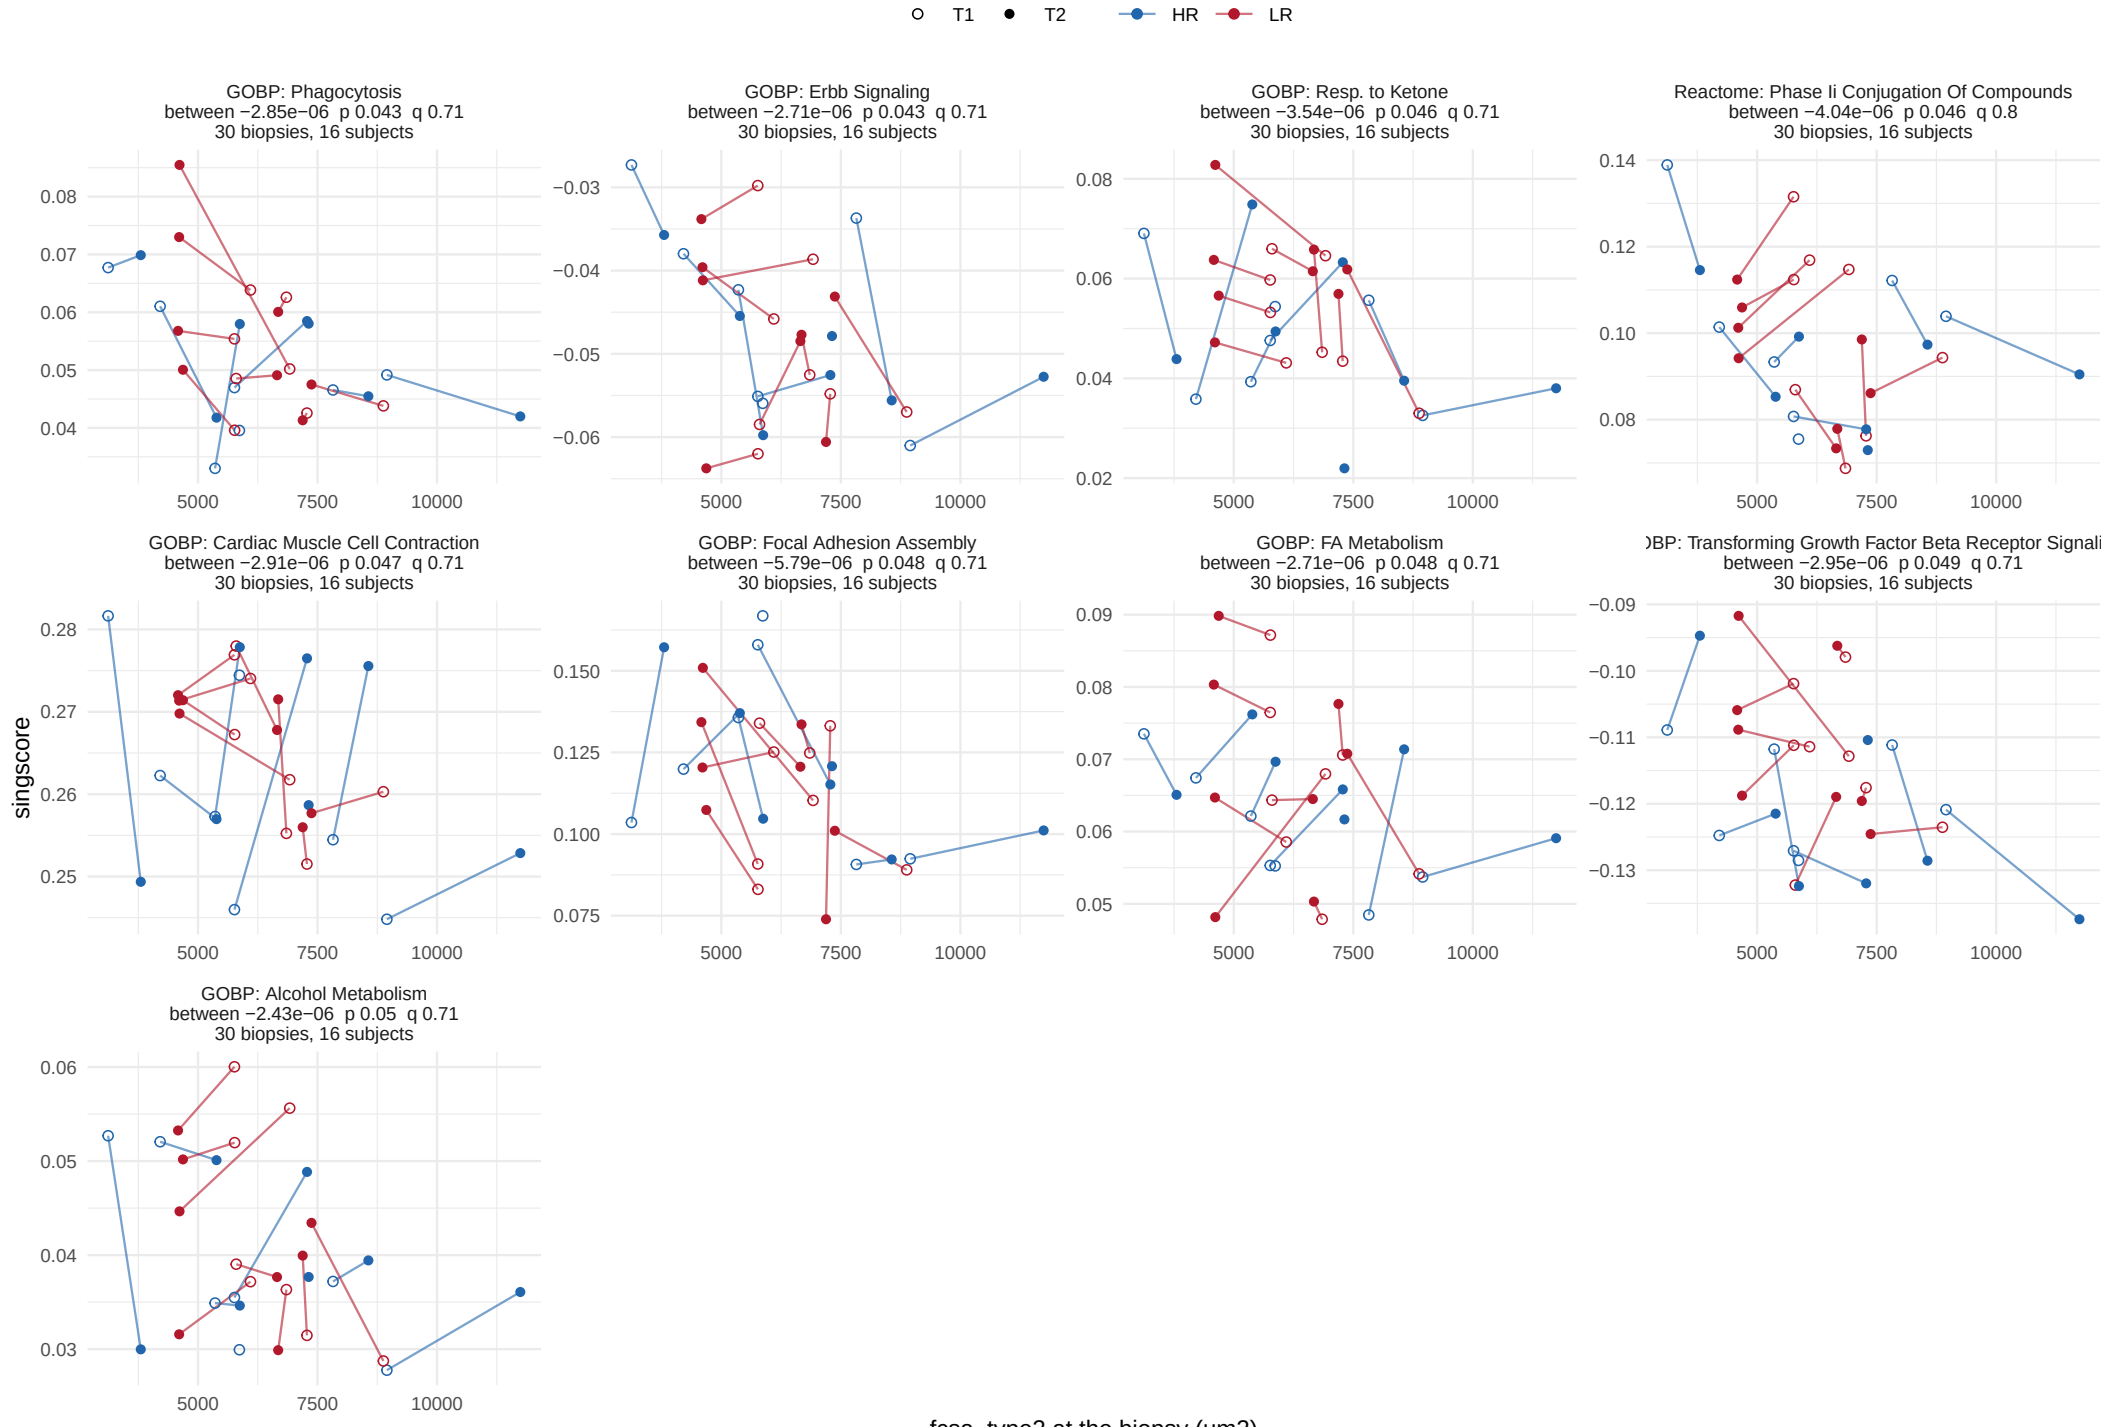


limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

## mcsa, within−person term


53 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 1 of 5.

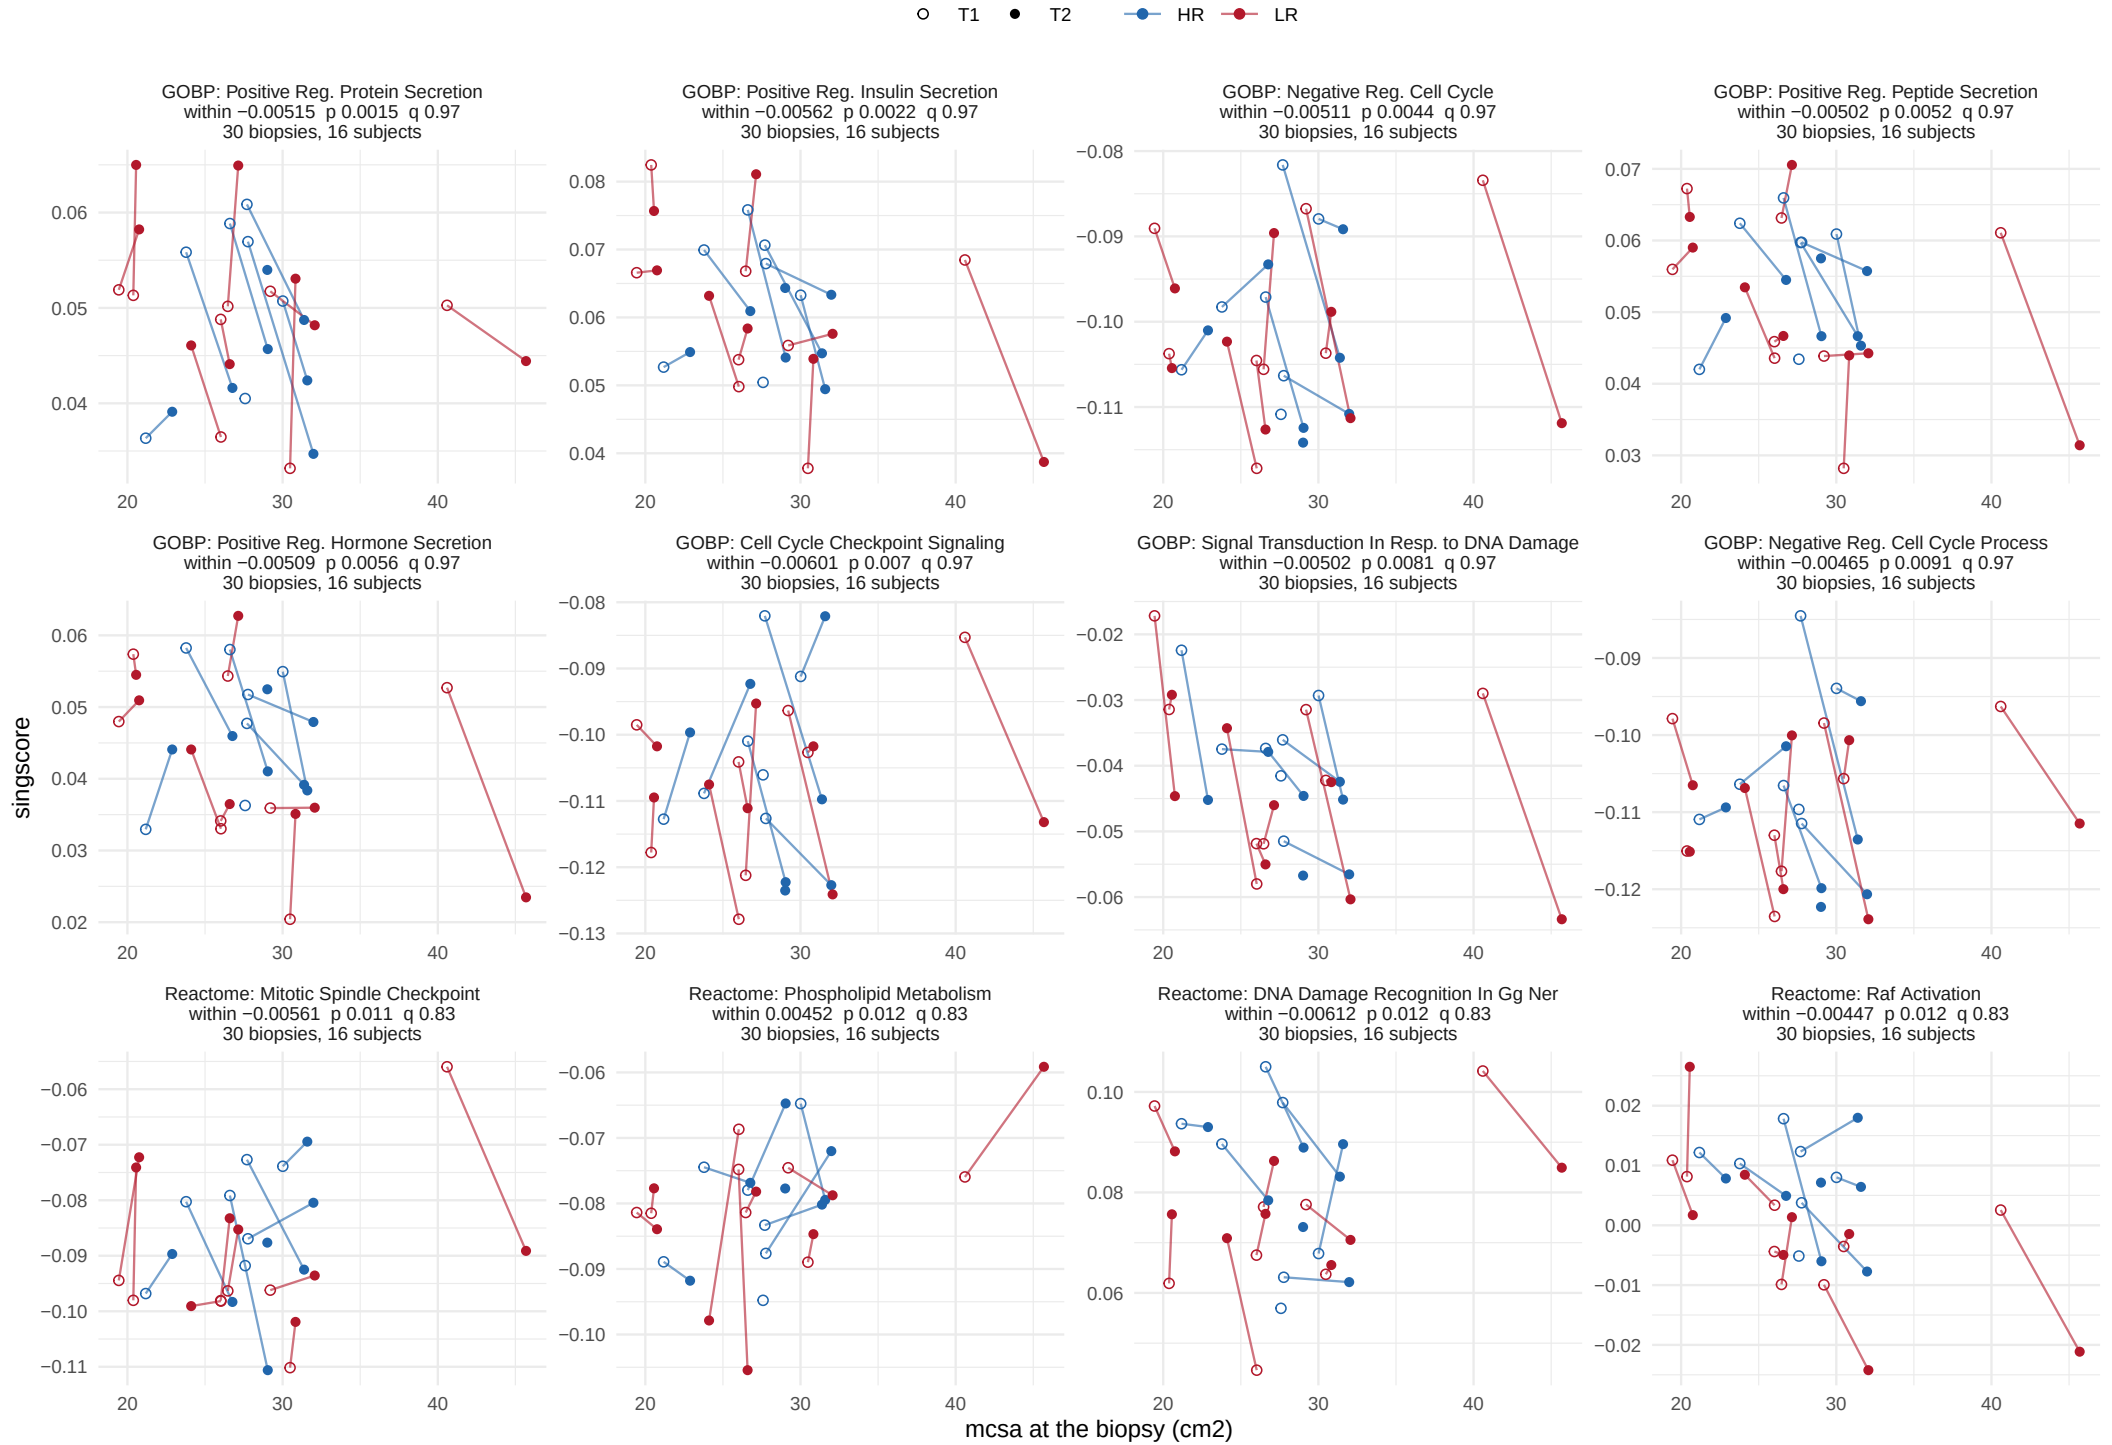


limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

## mcsa, within−person term


53 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 2 of 5.

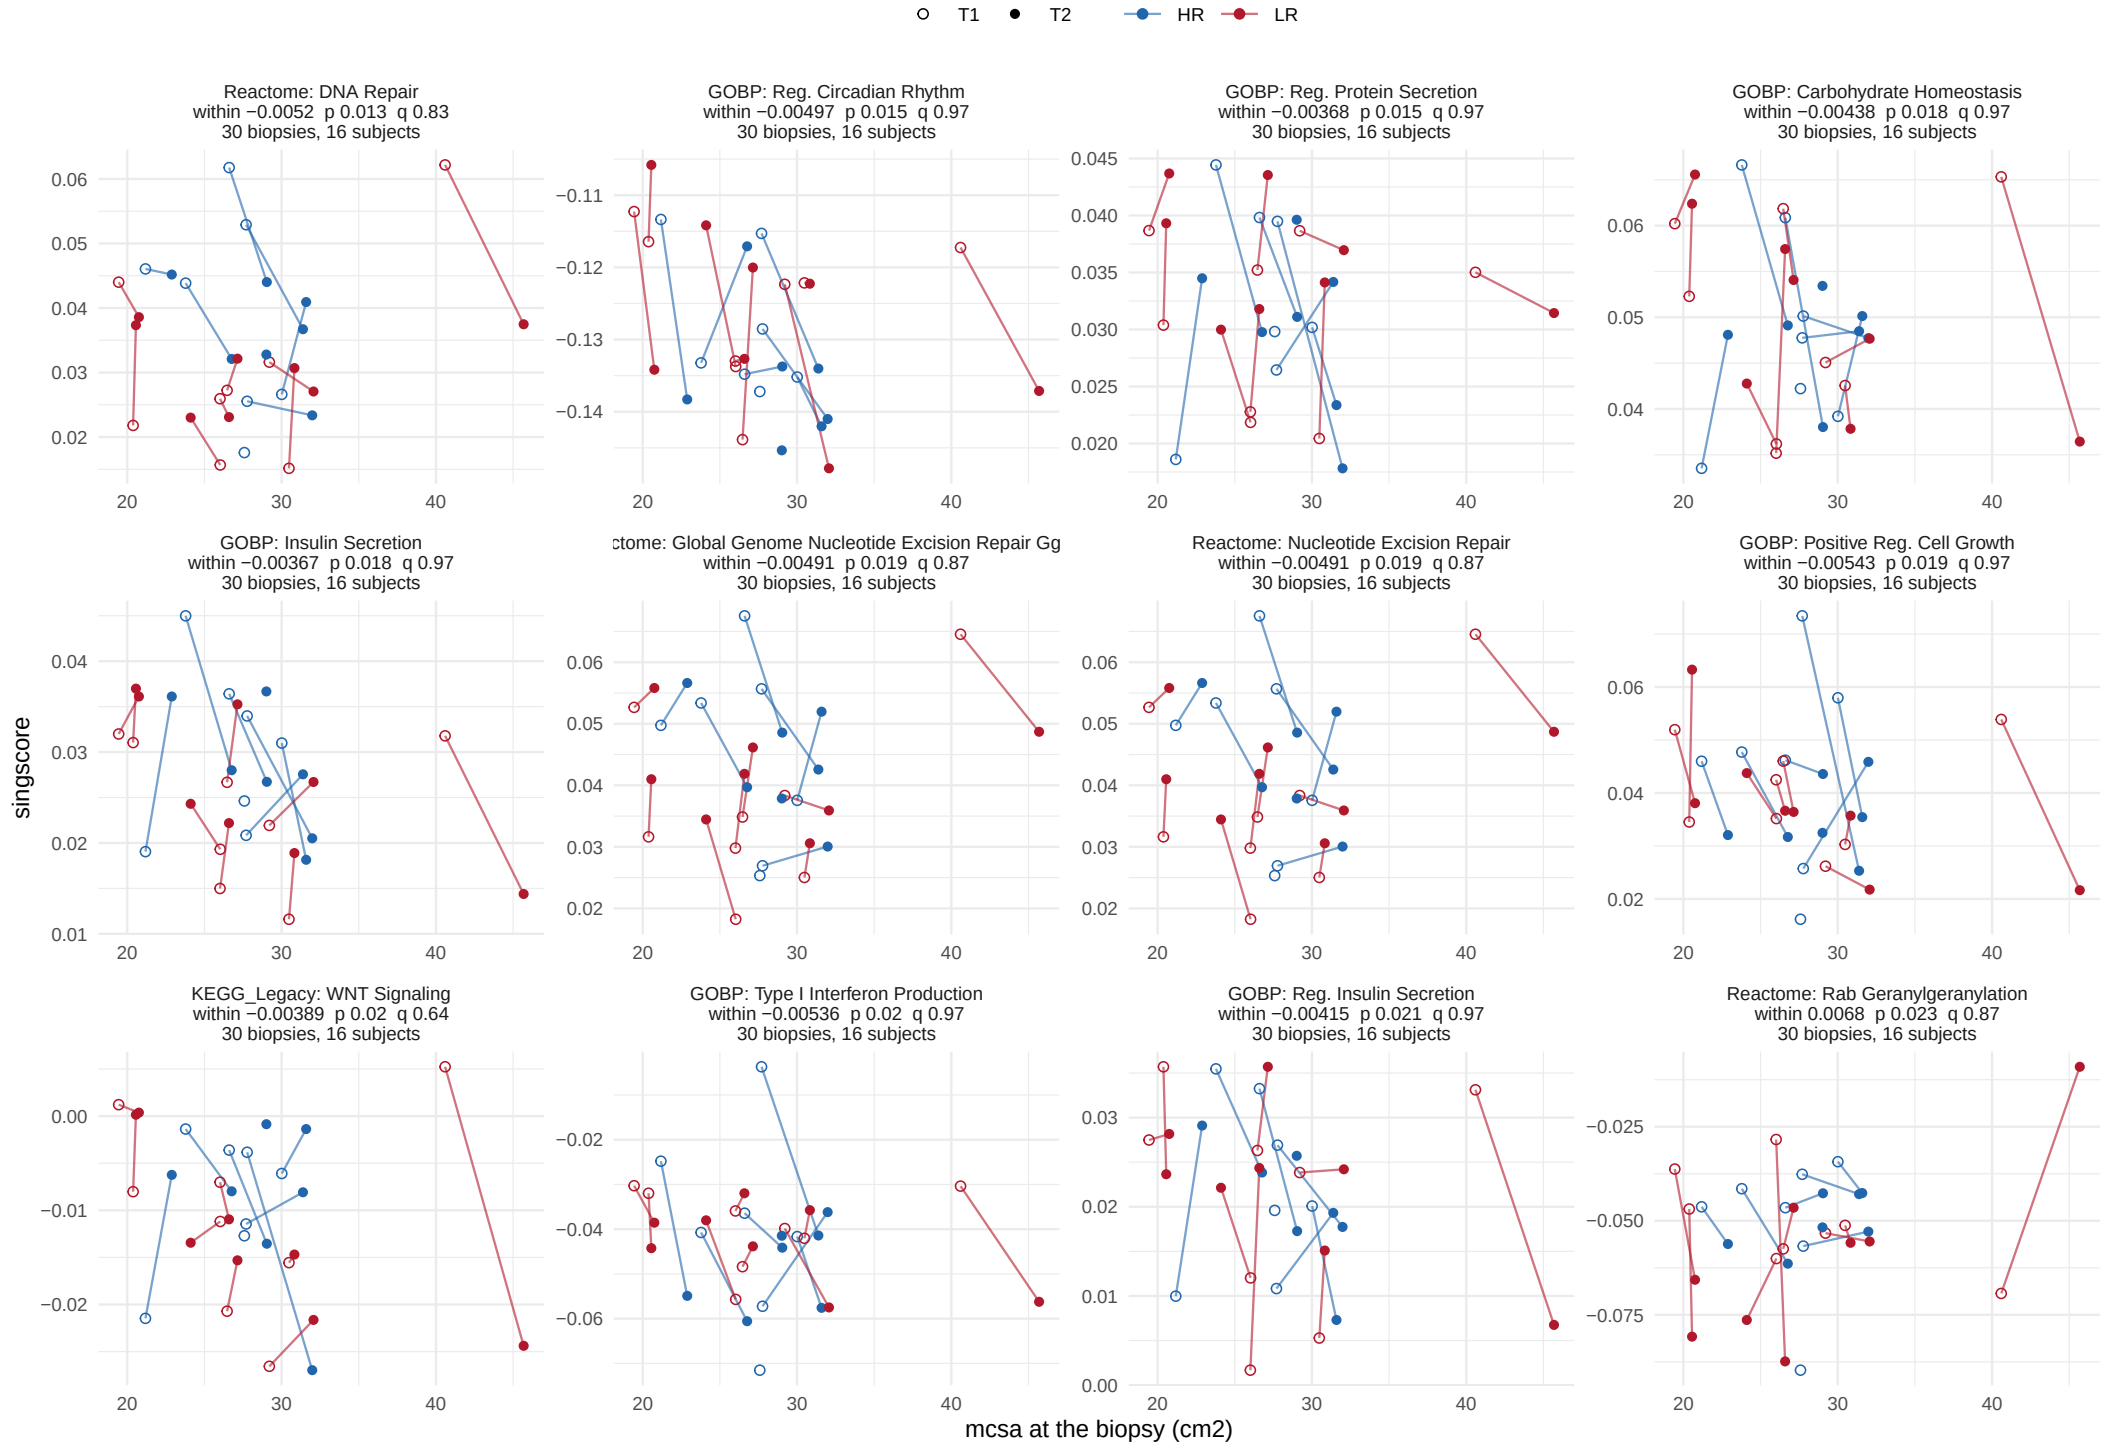


limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

## mcsa, within−person term


53 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 3 of 5.

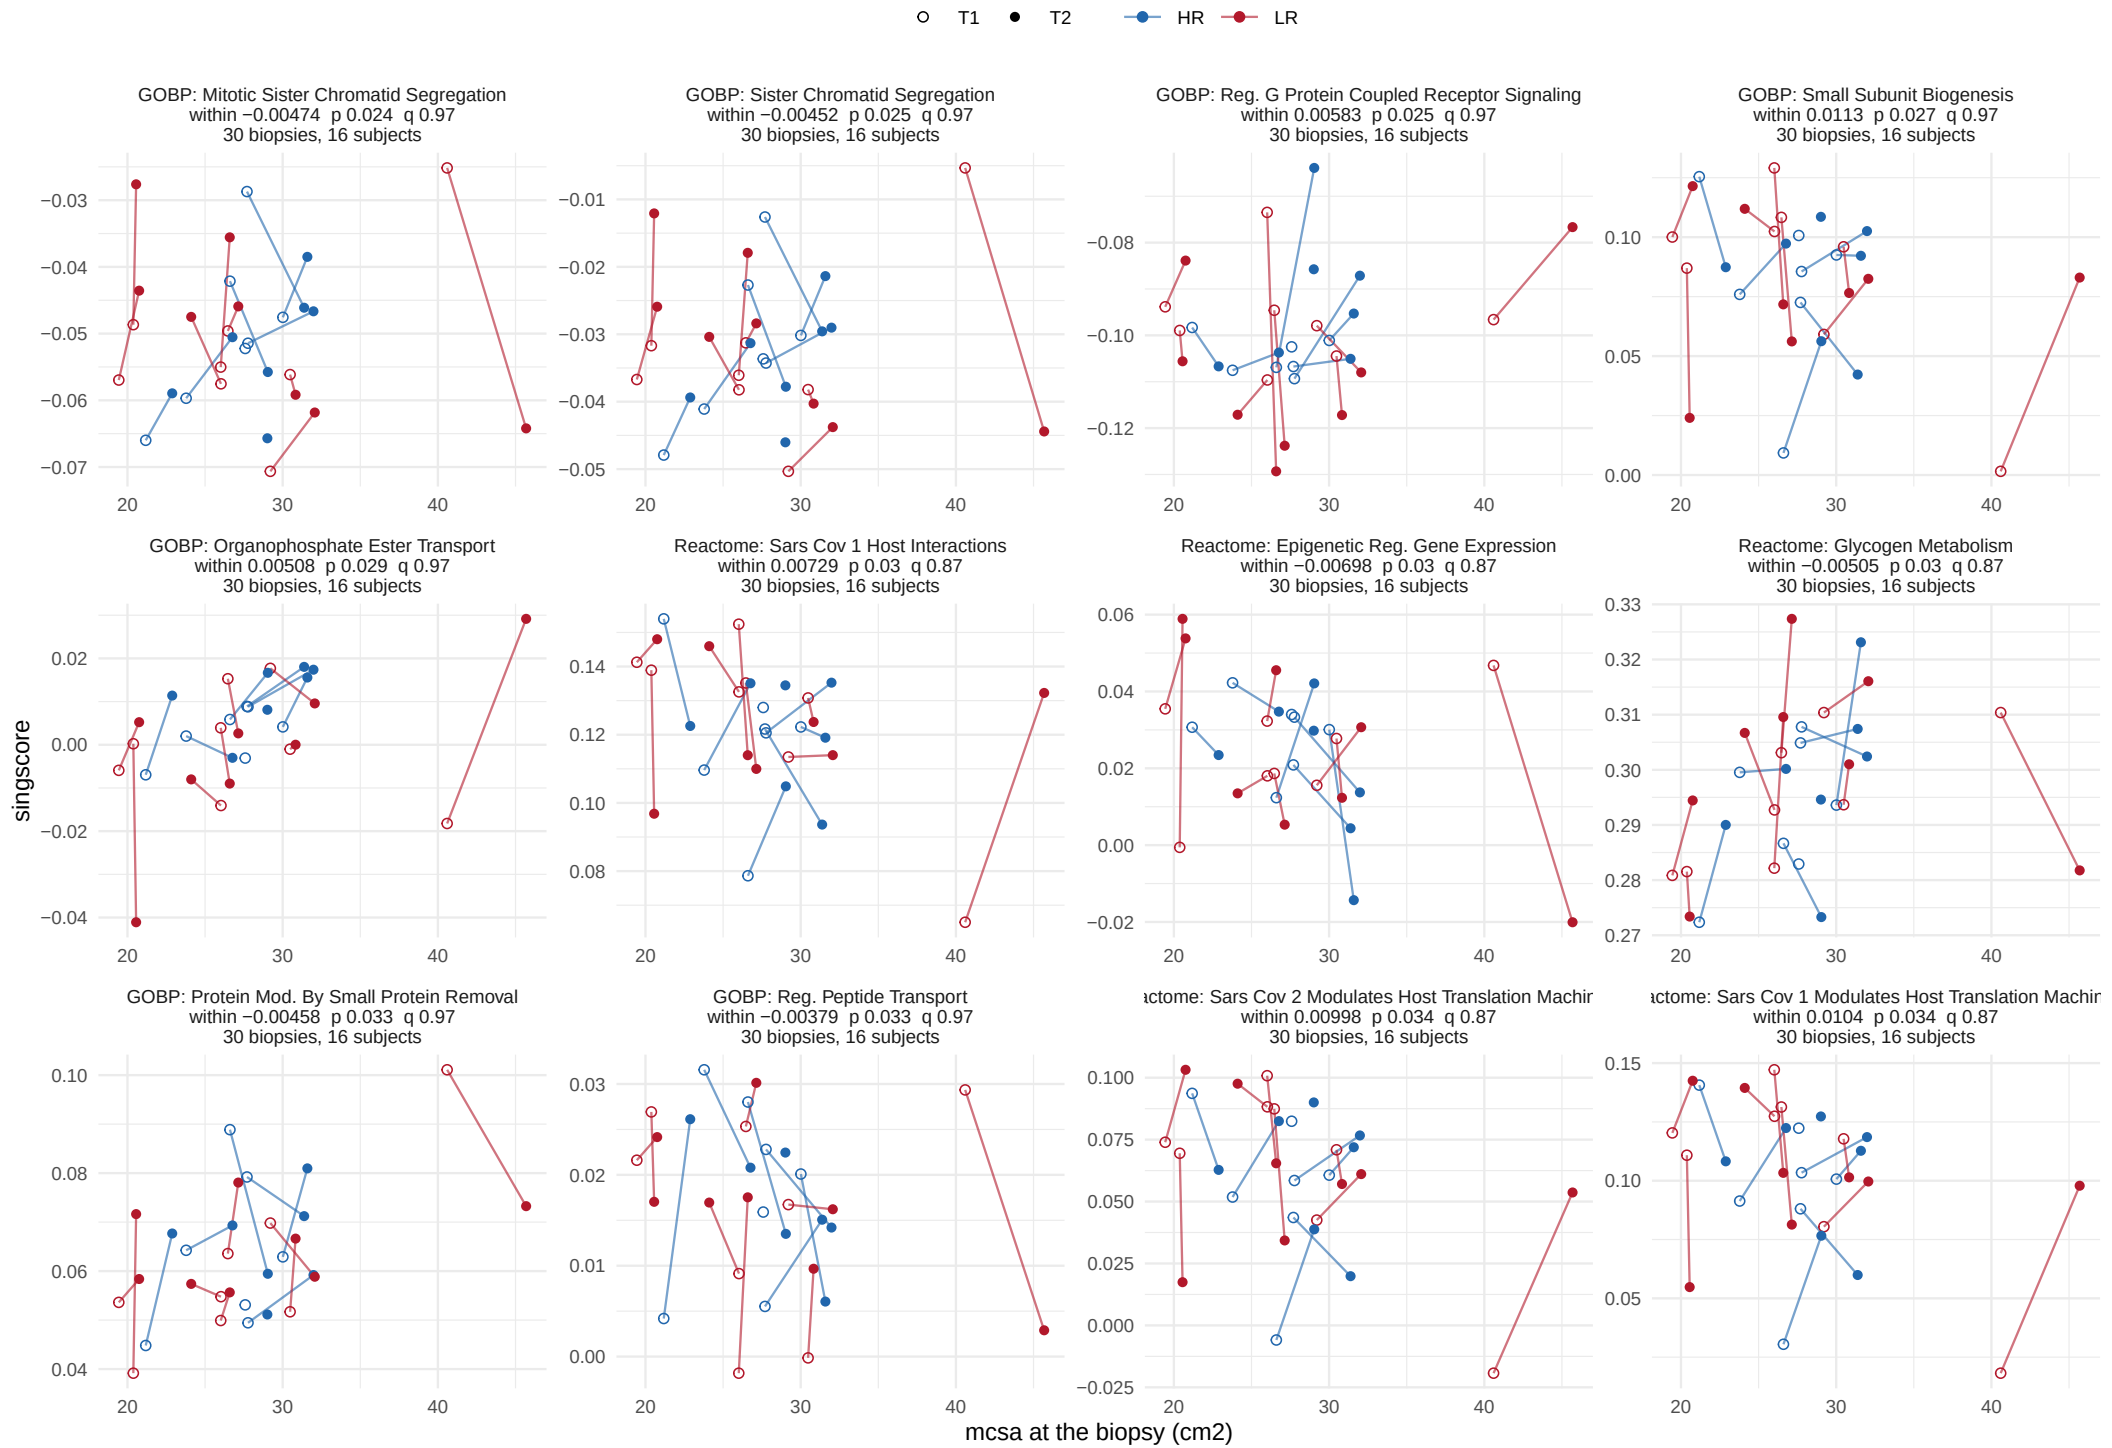


limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

## mcsa, within−person term


53 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 4 of 5.

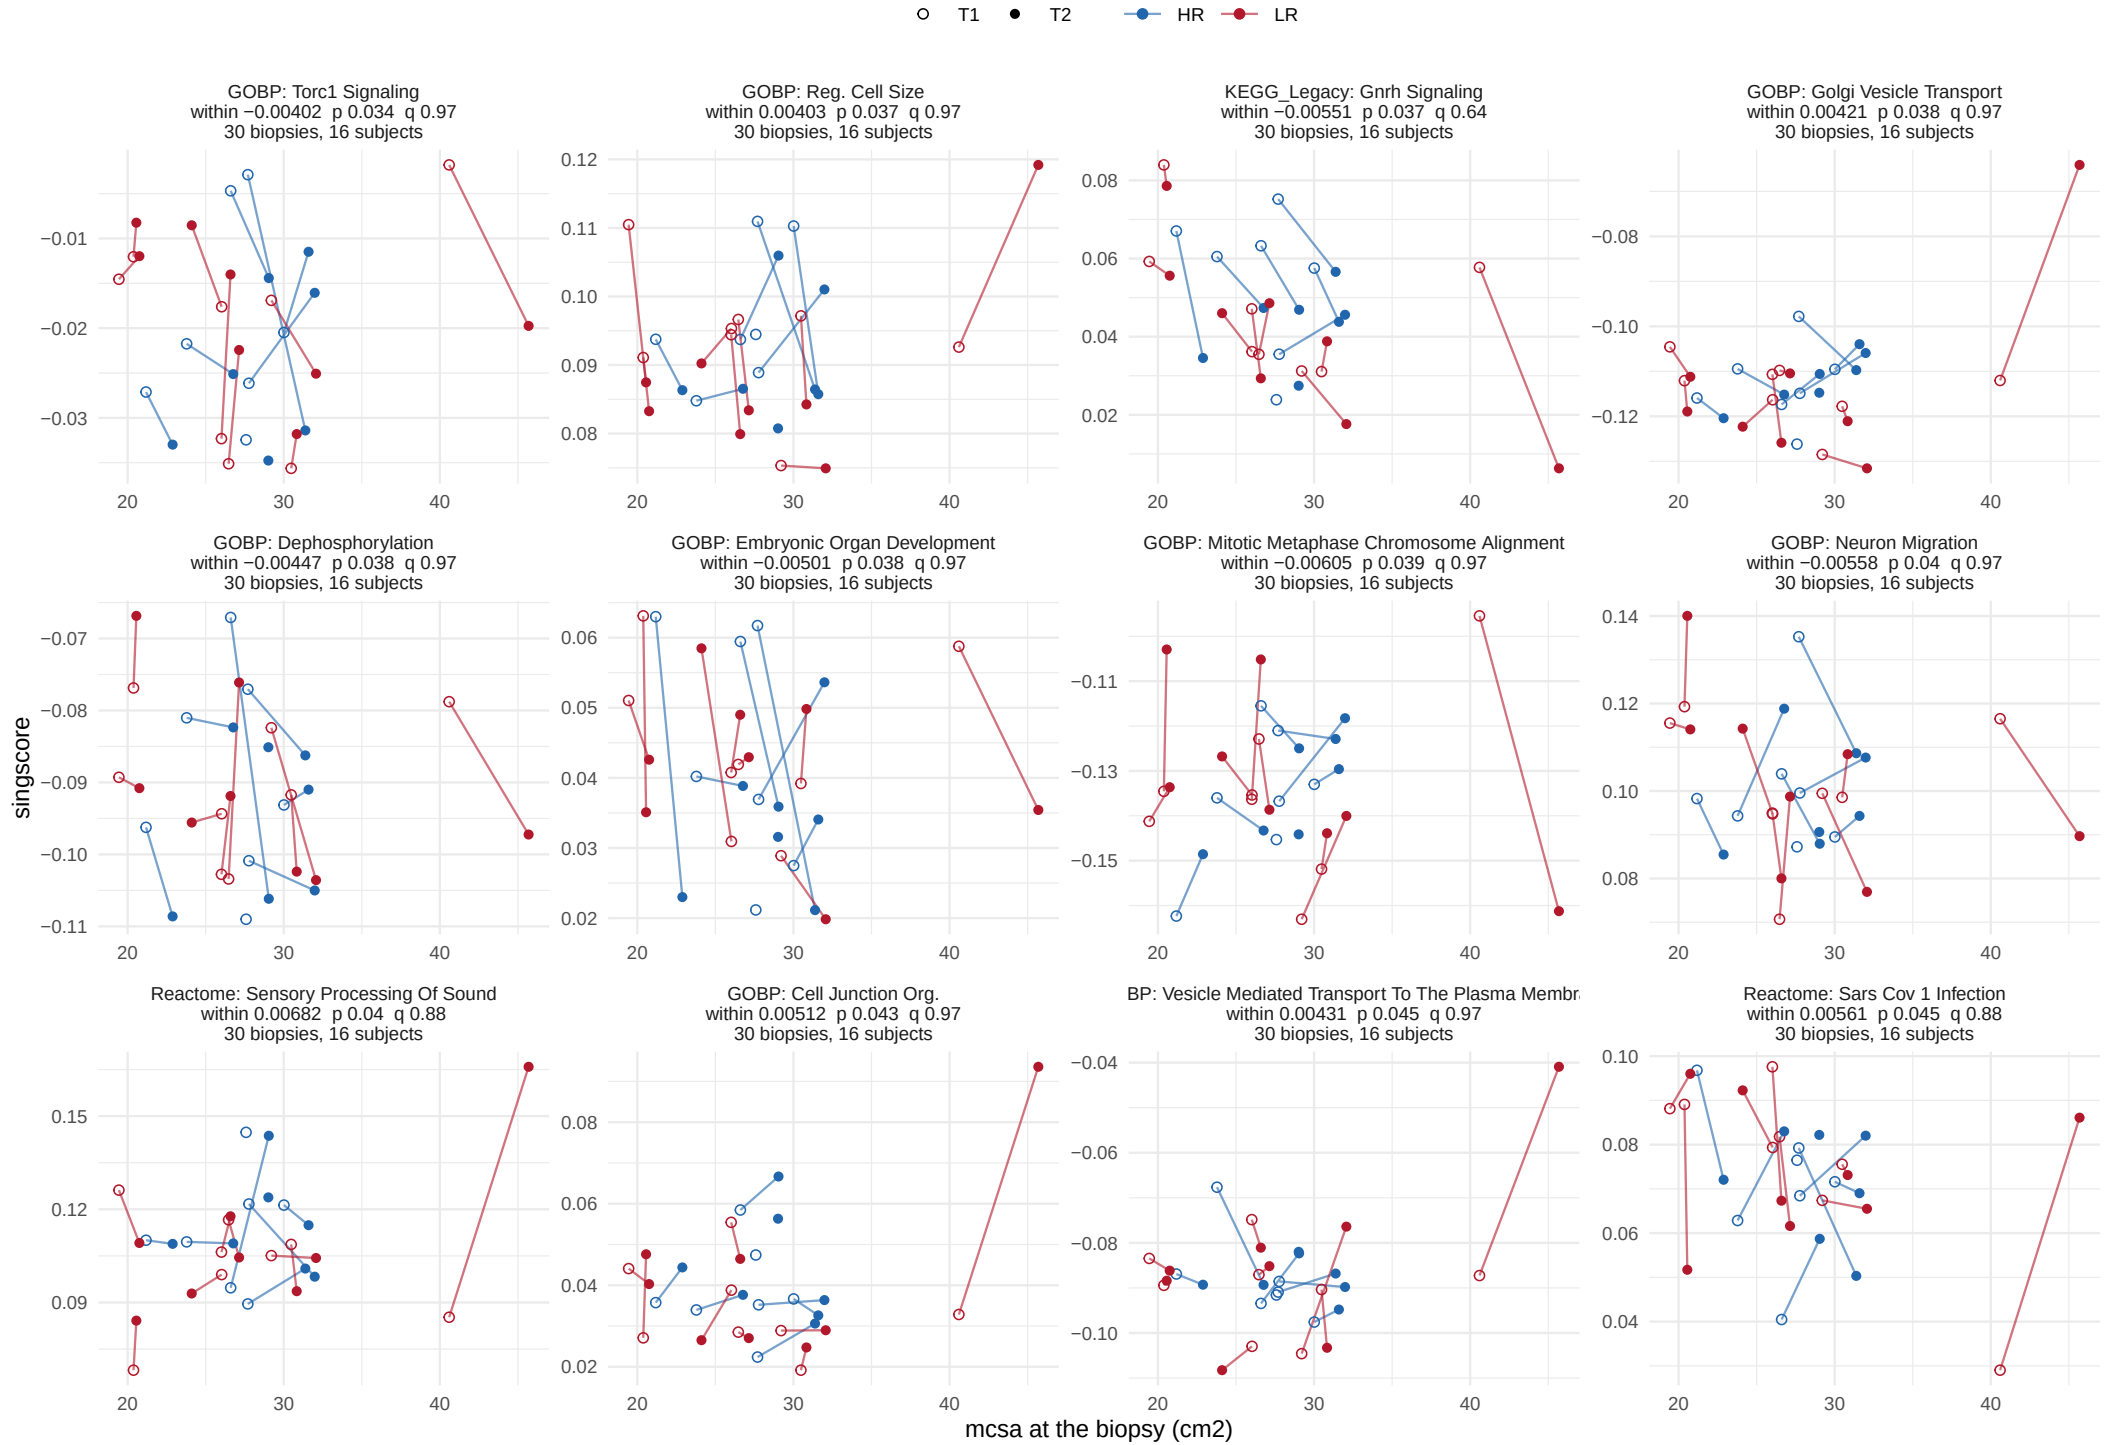


limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

## mcsa, within−person term


53 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 5 of 5.

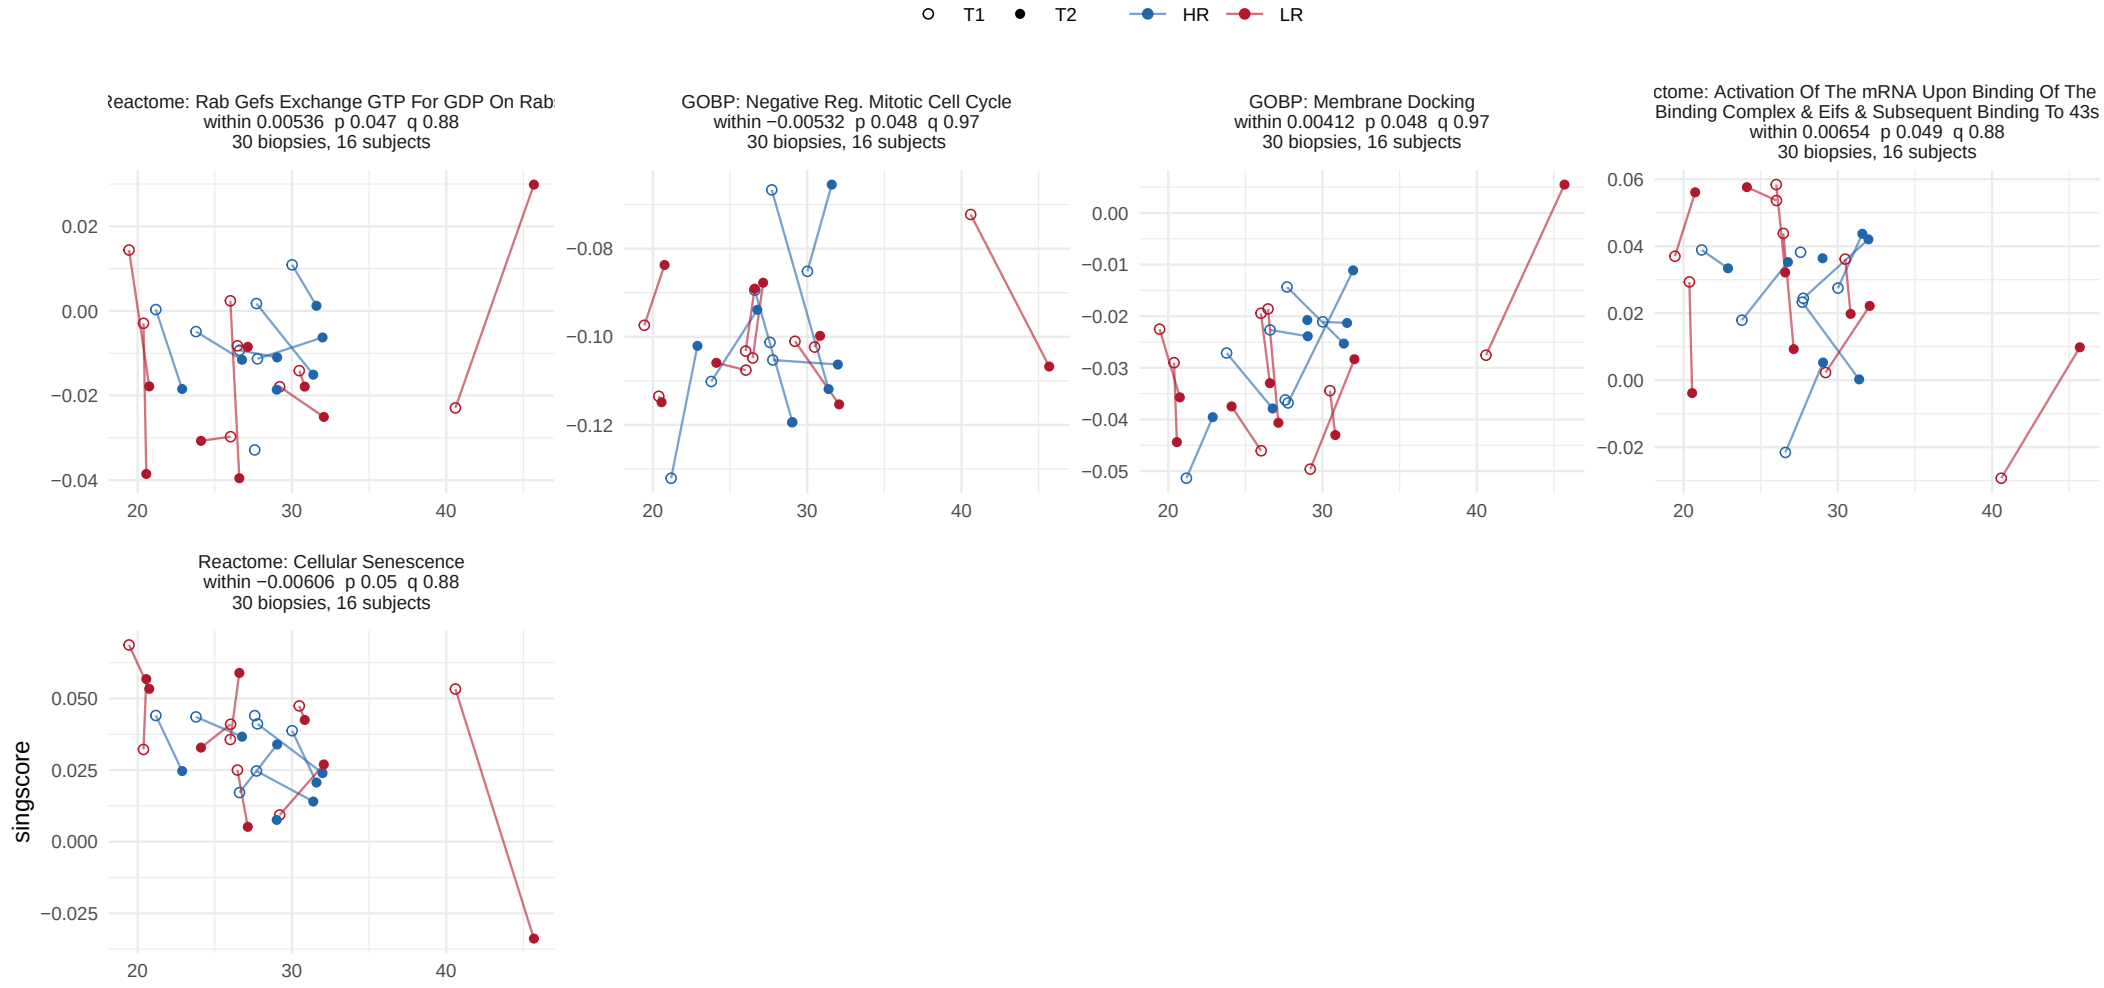


limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

## mcsa, between−person term


161 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 1 of 14.

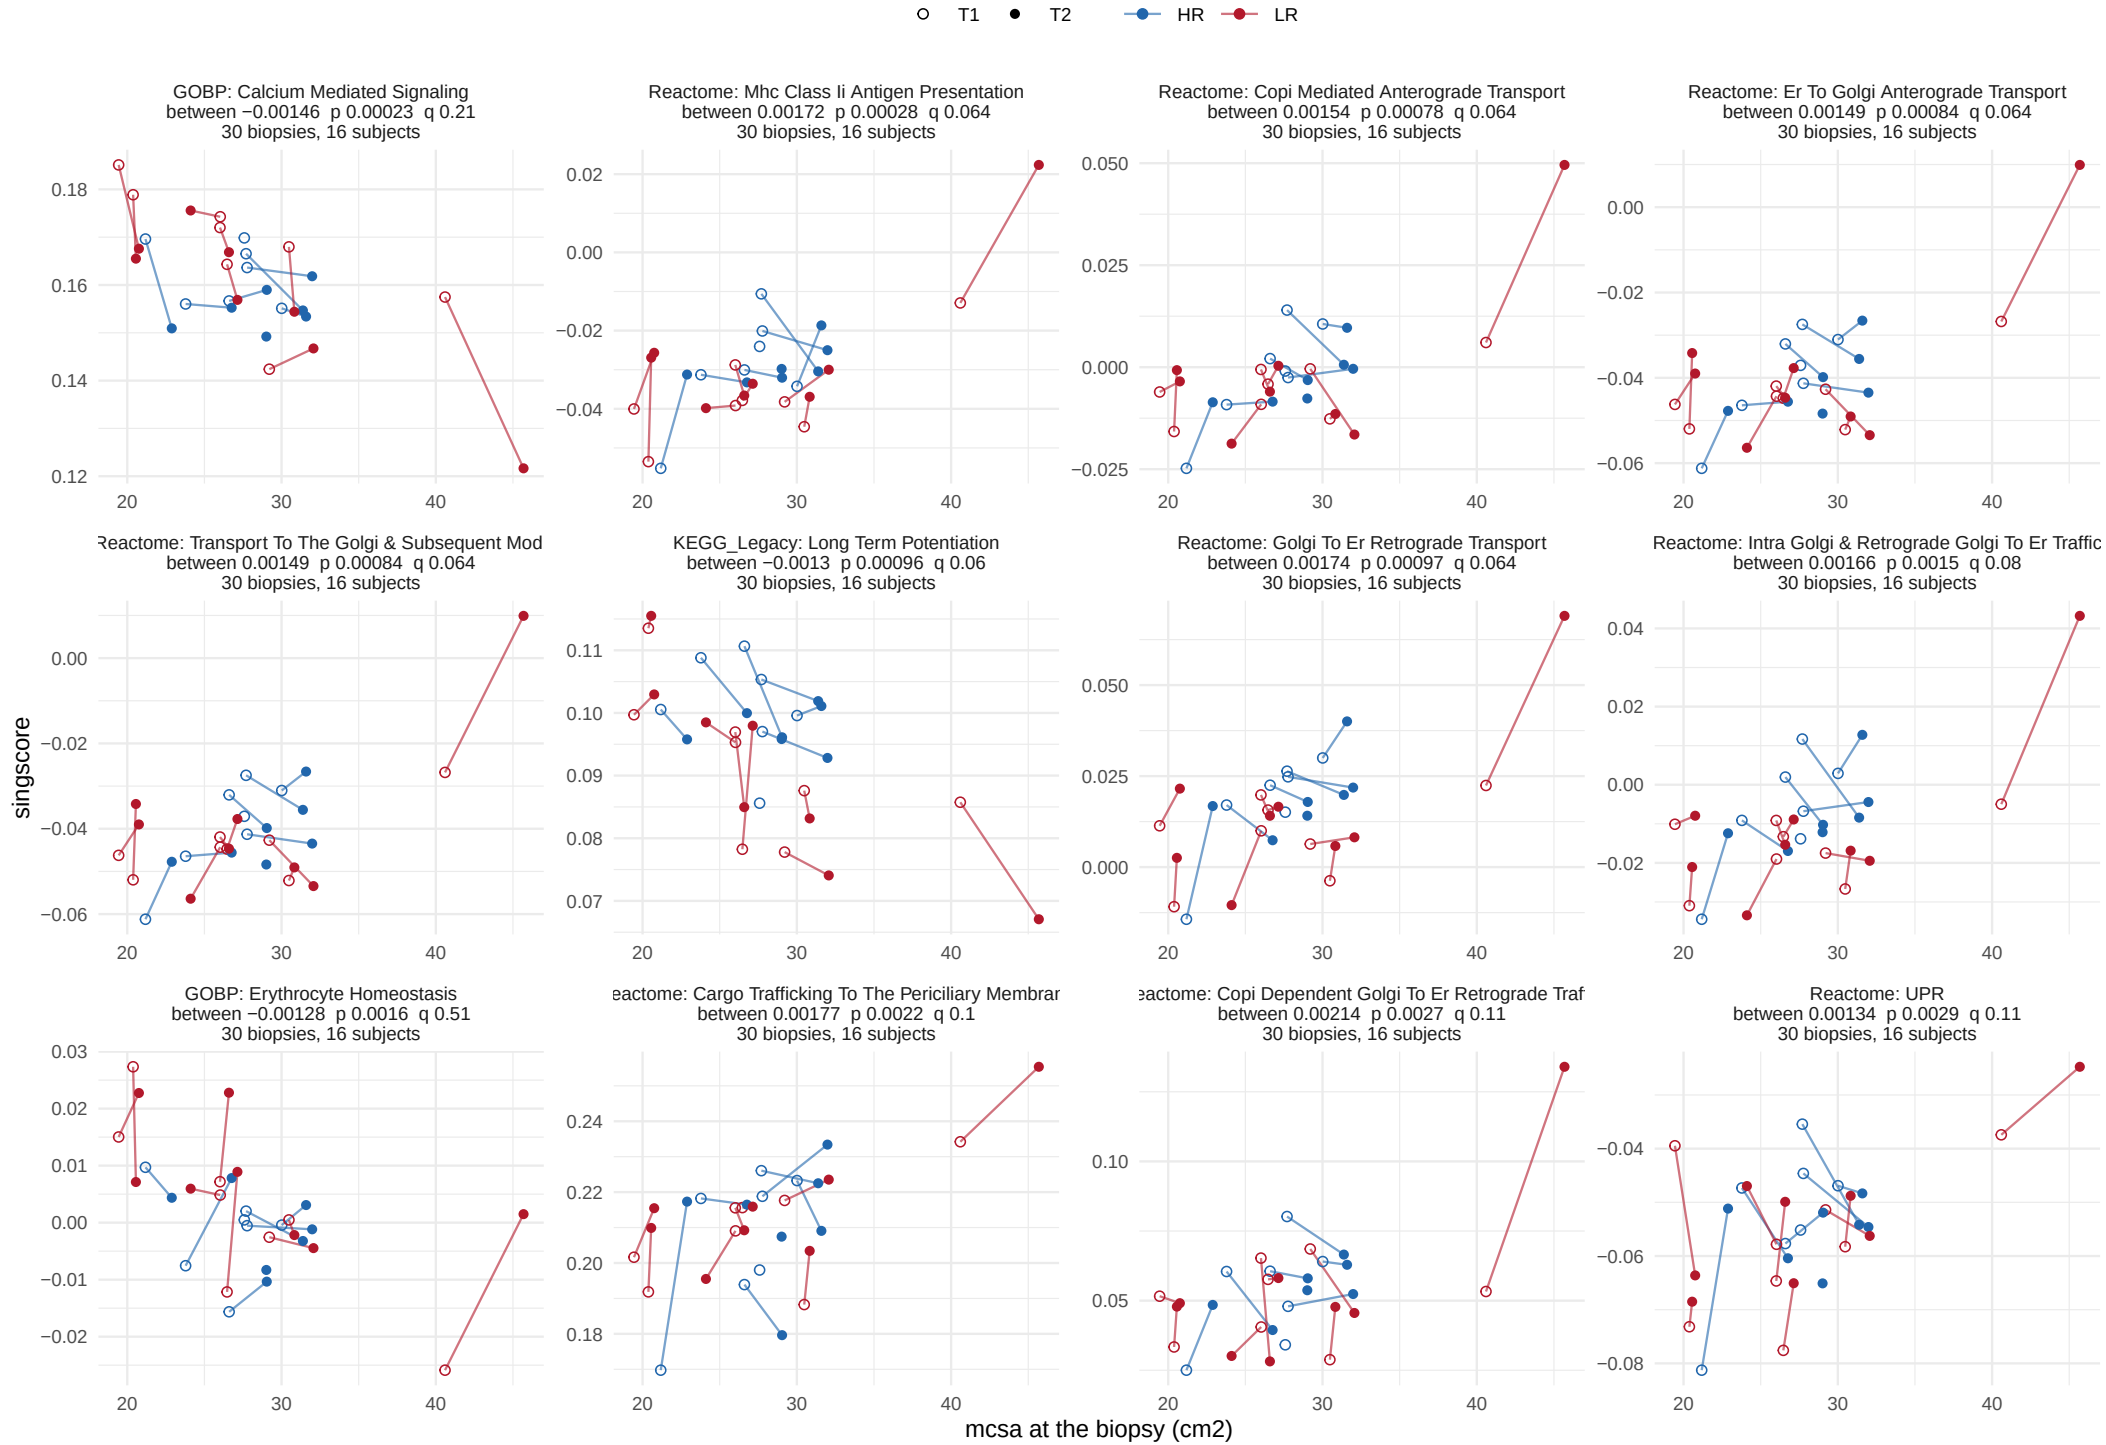


limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

## mcsa, between−person term


161 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 2 of 14.

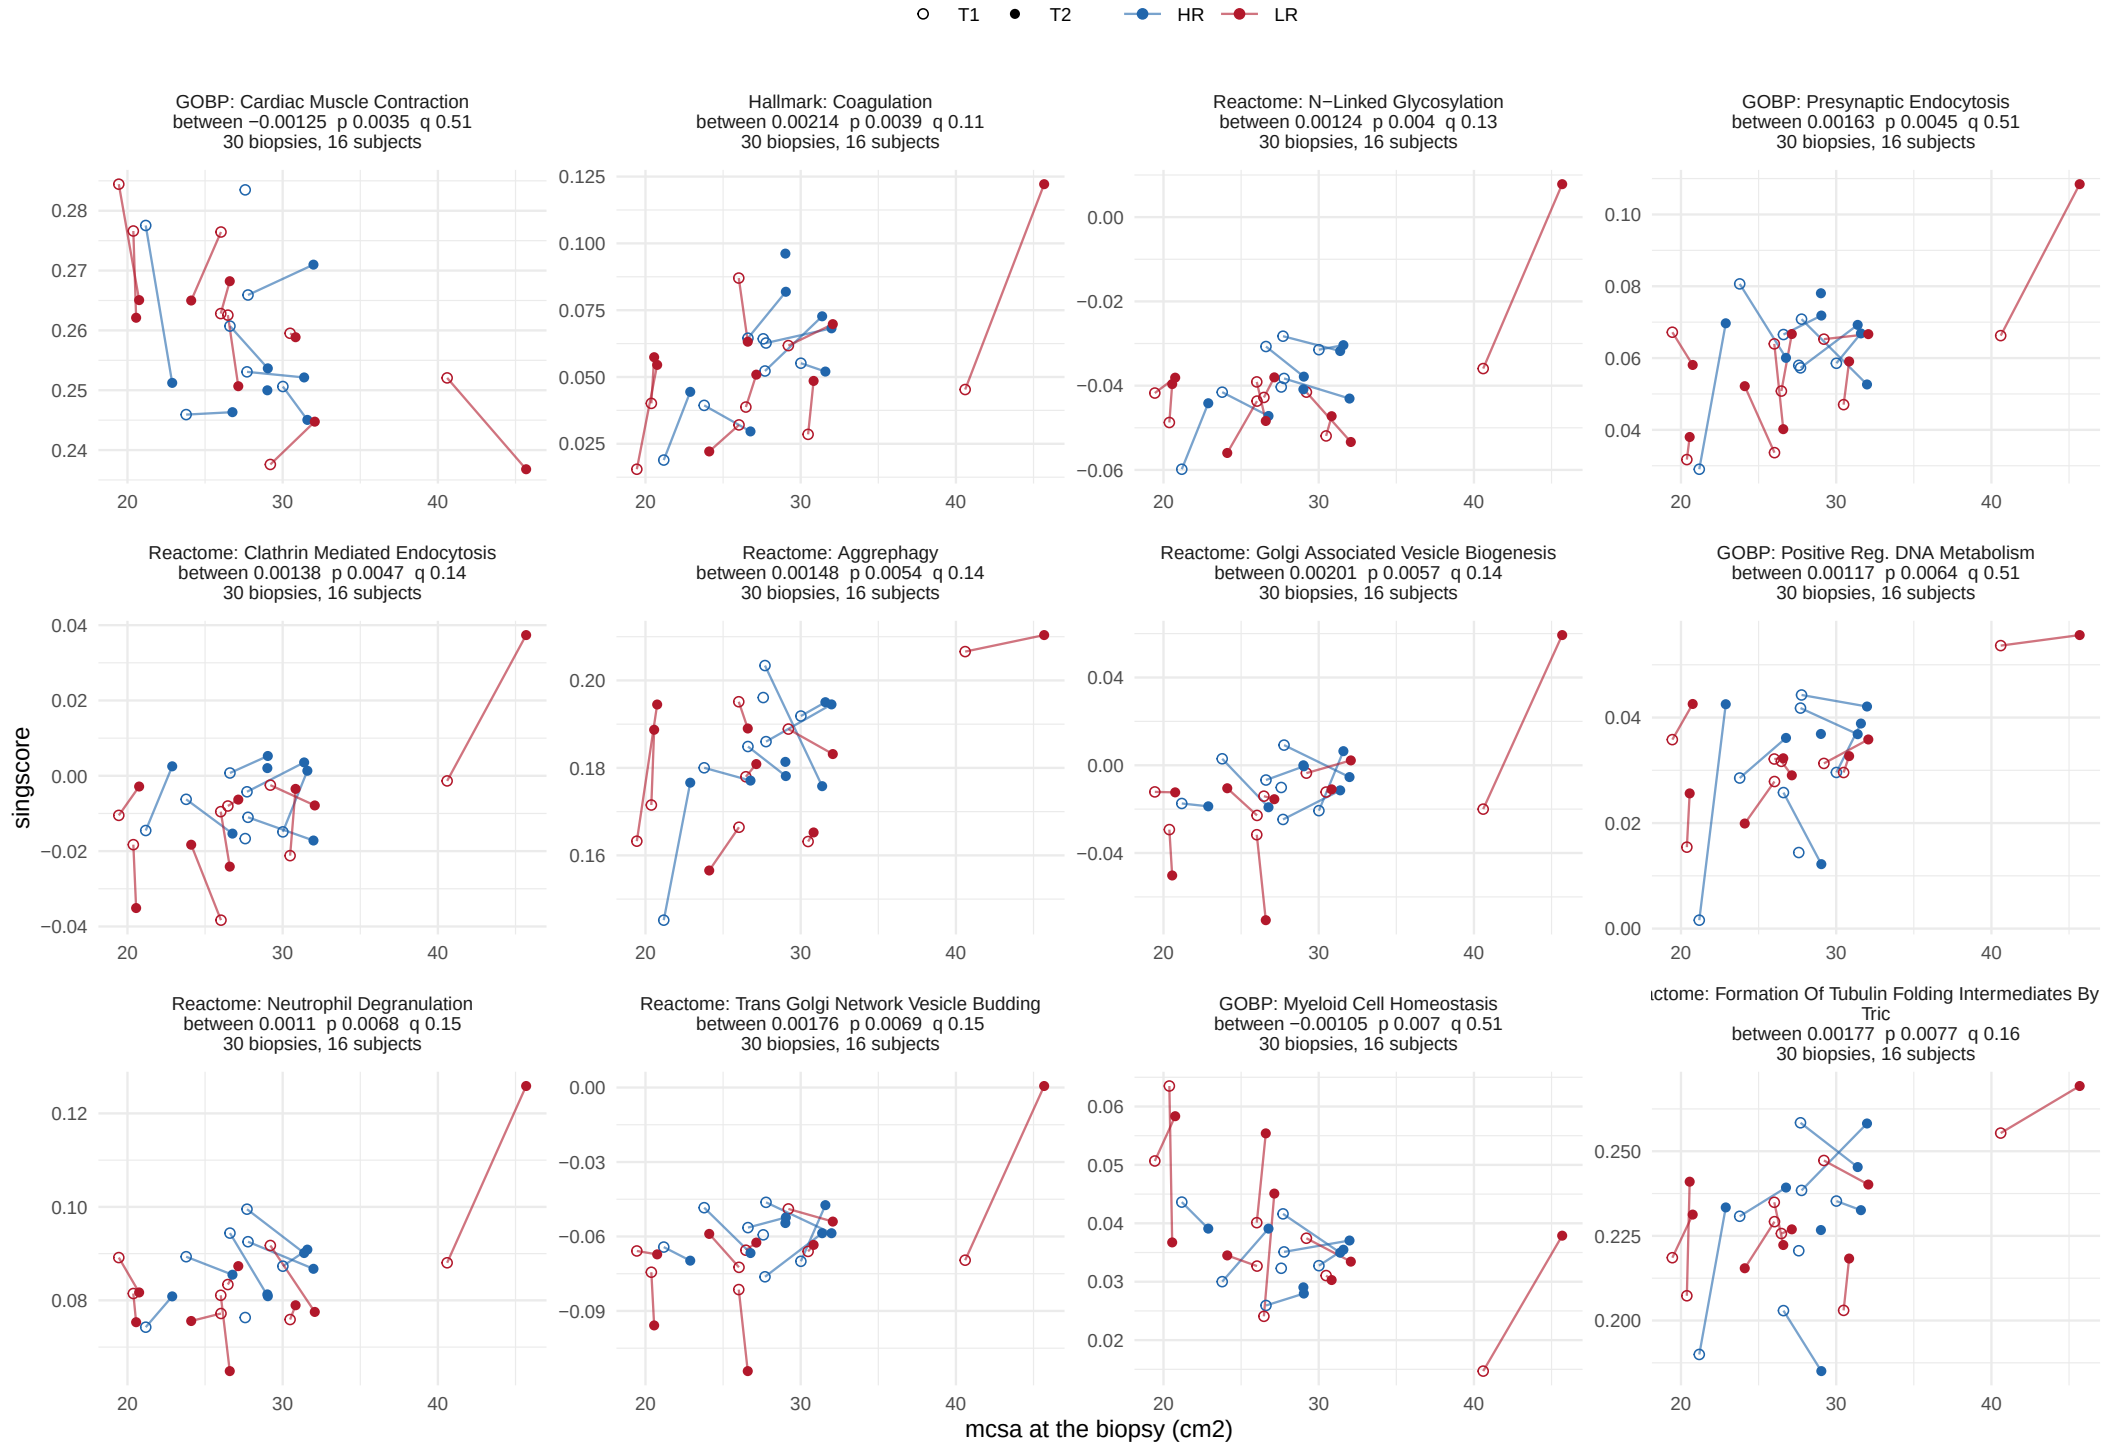


limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

## mcsa, between−person term


161 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 3 of 14.

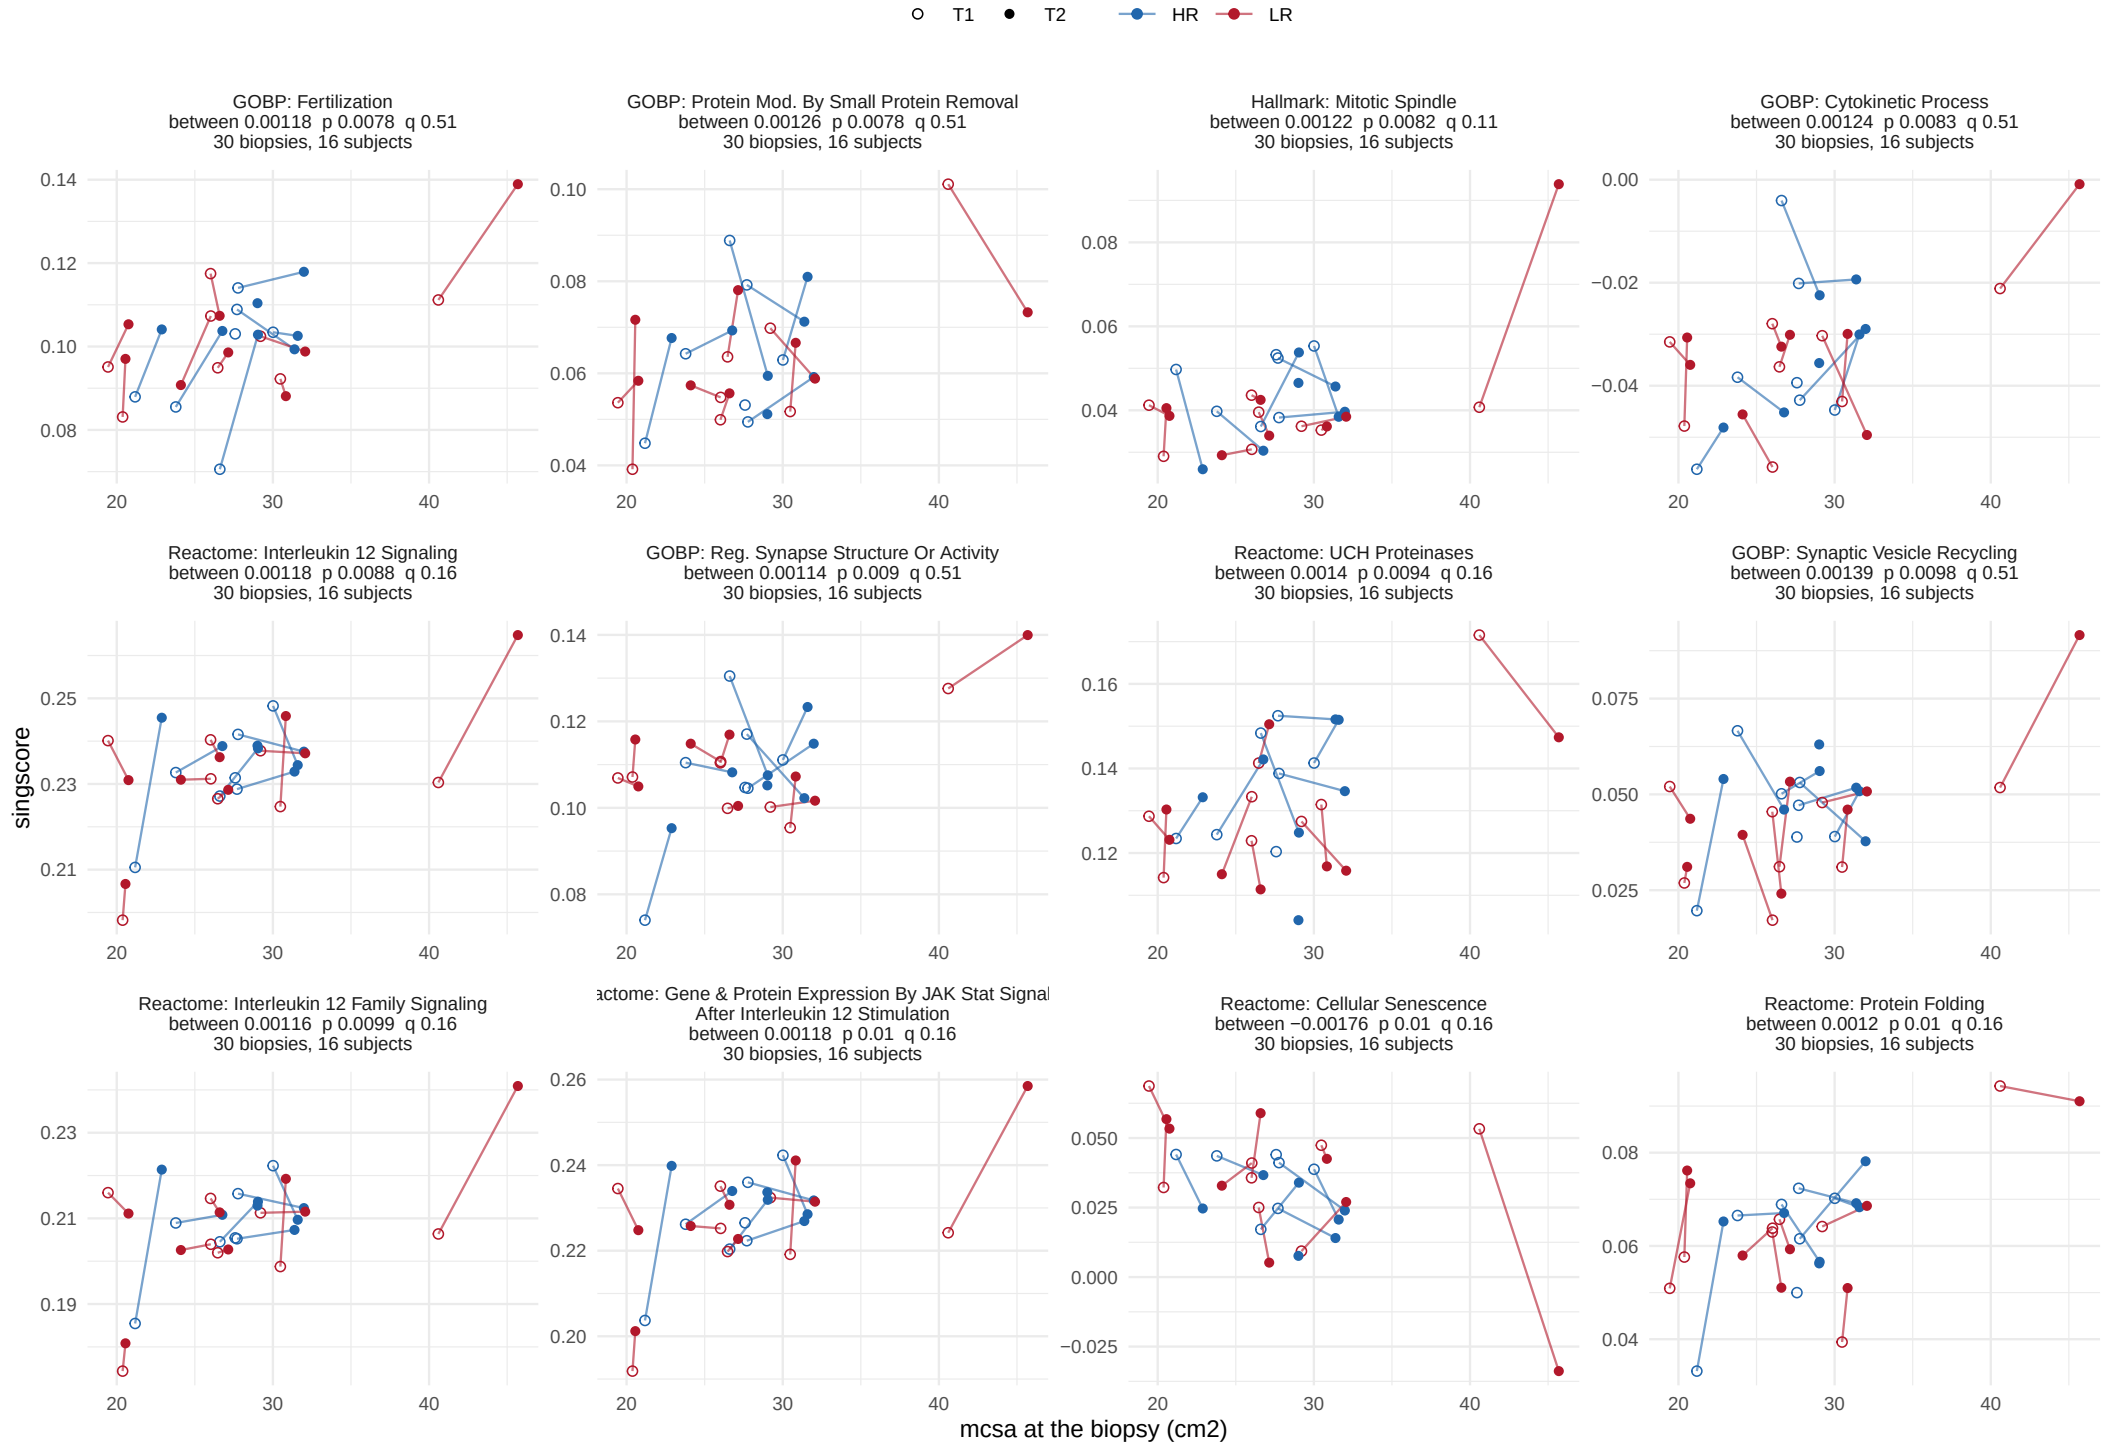


limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

## mcsa, between−person term


161 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 4 of 14.

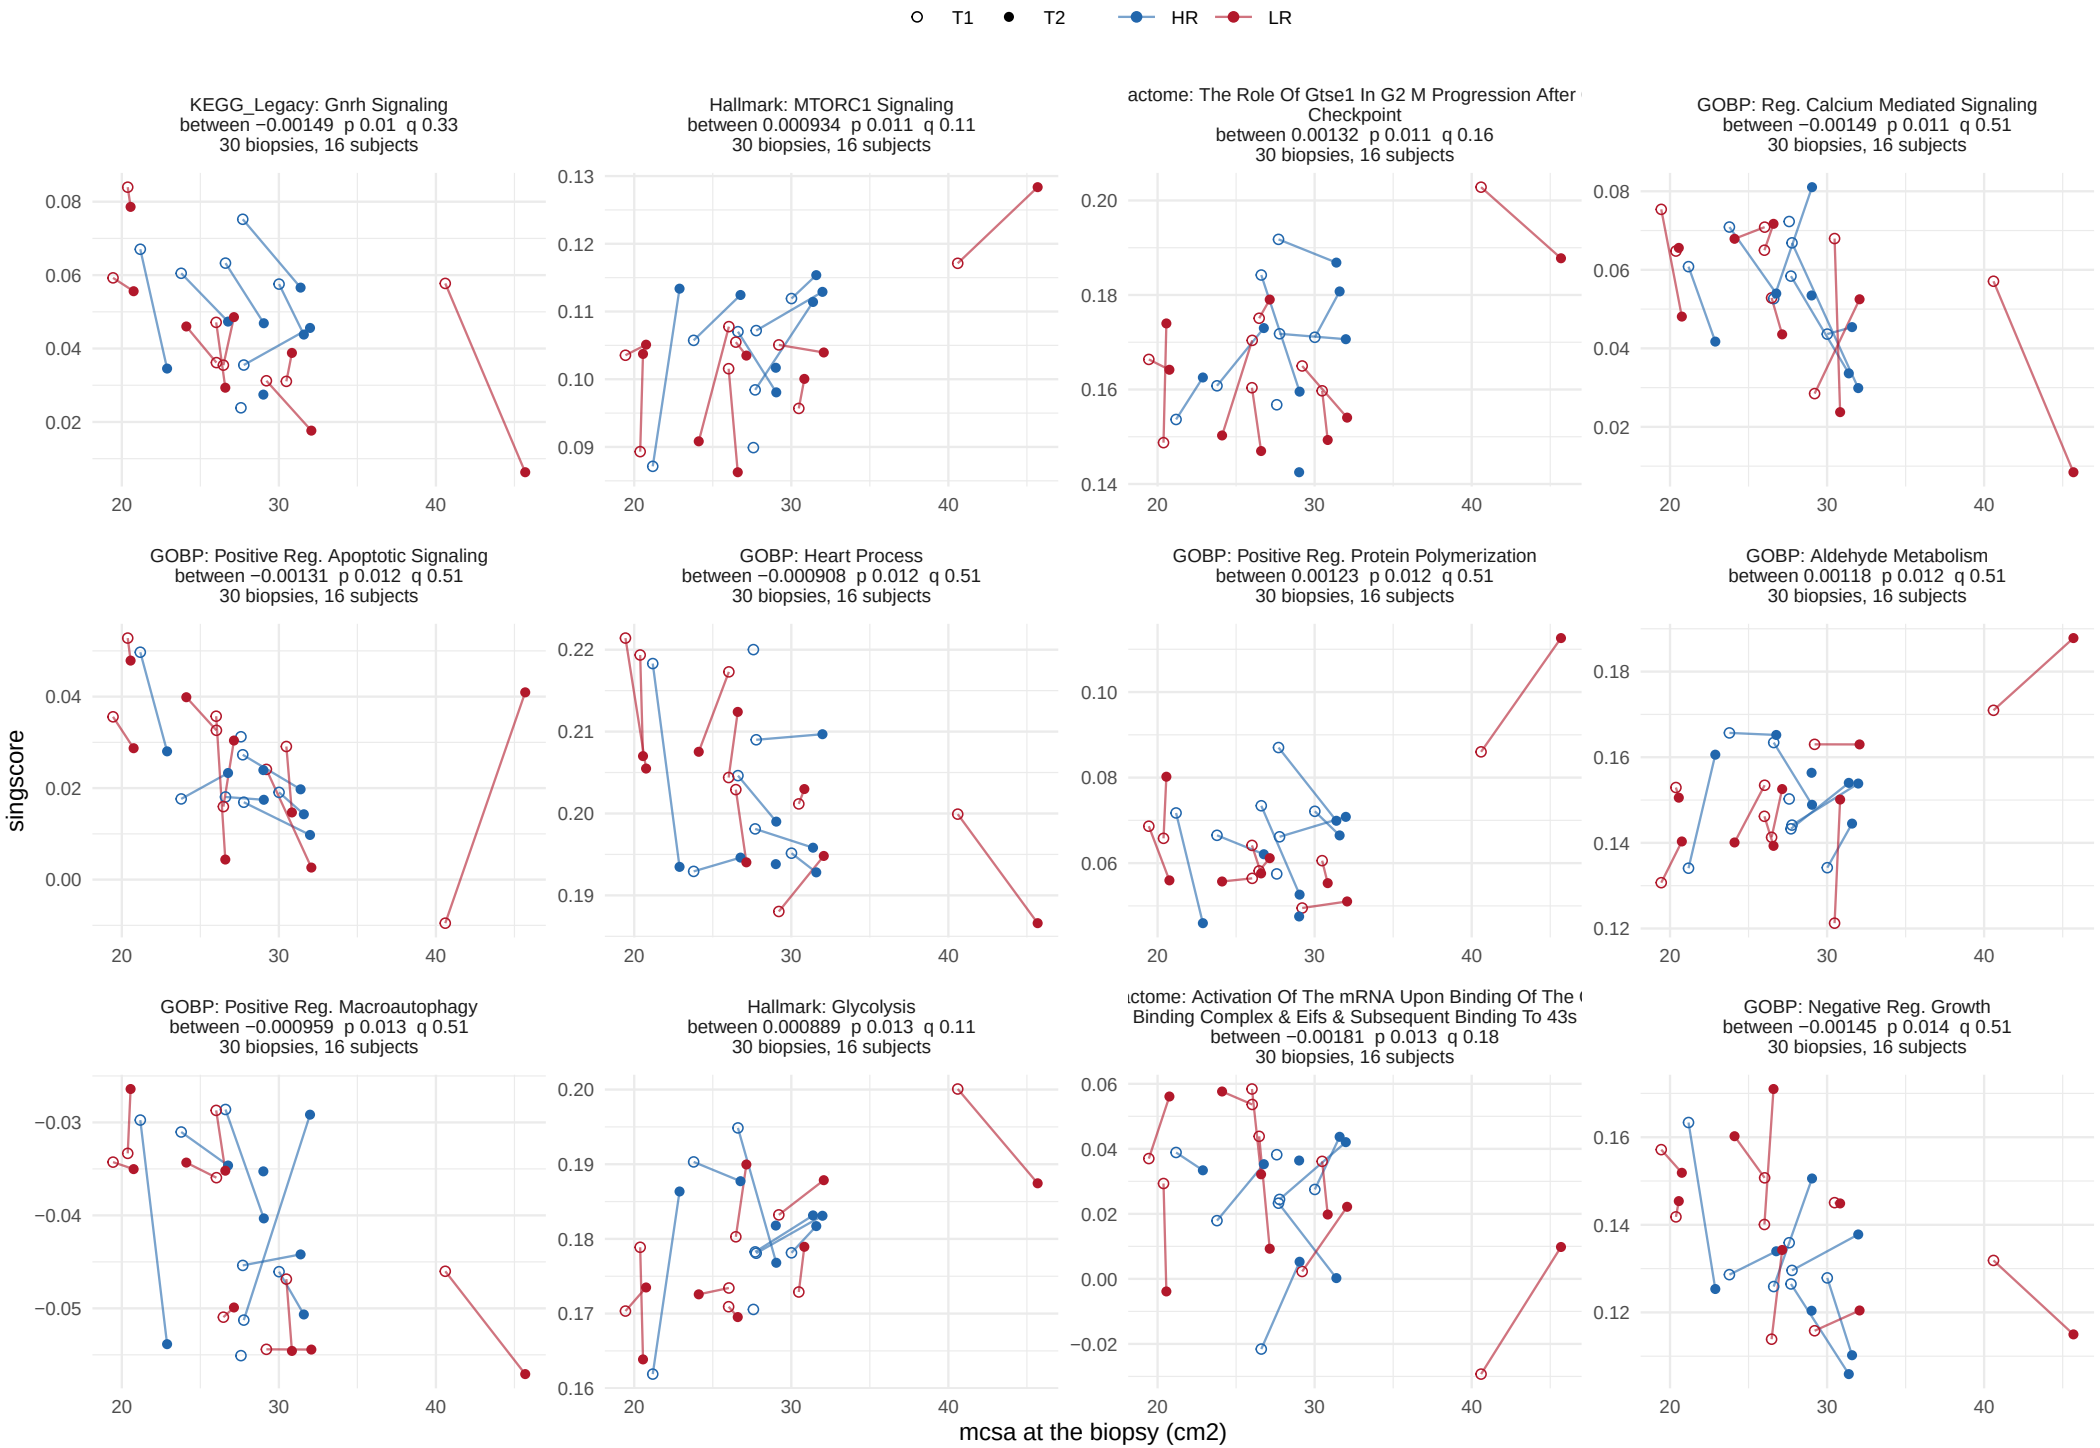


limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

## mcsa, between−person term


161 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 5 of 14.

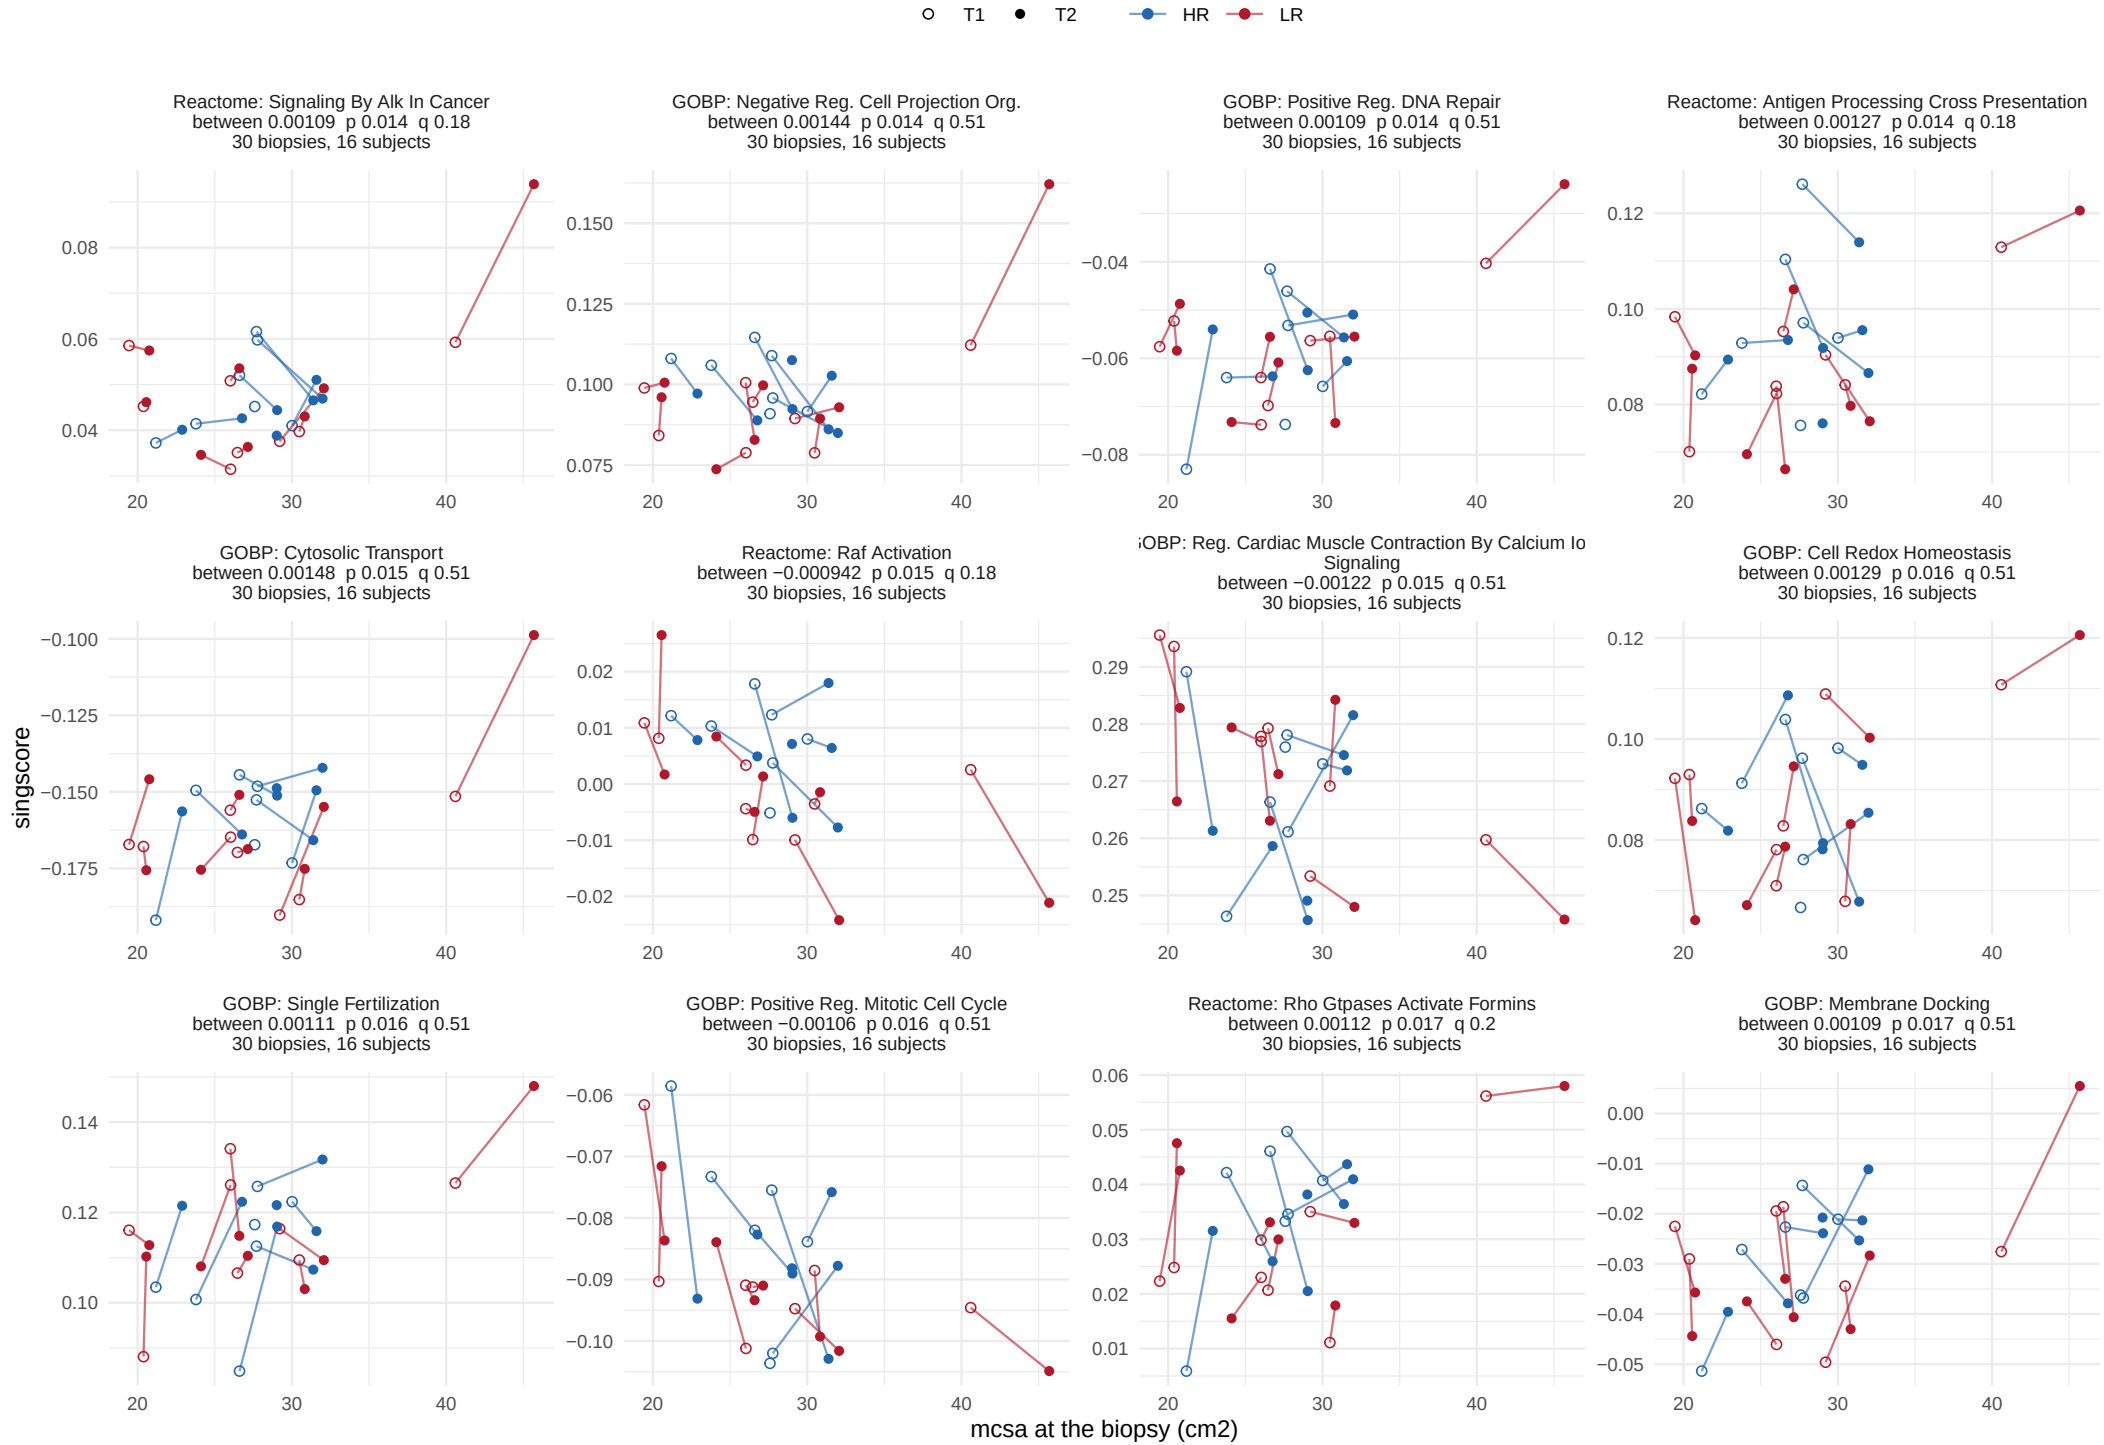


limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

## mcsa, between−person term


161 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 6 of 14.

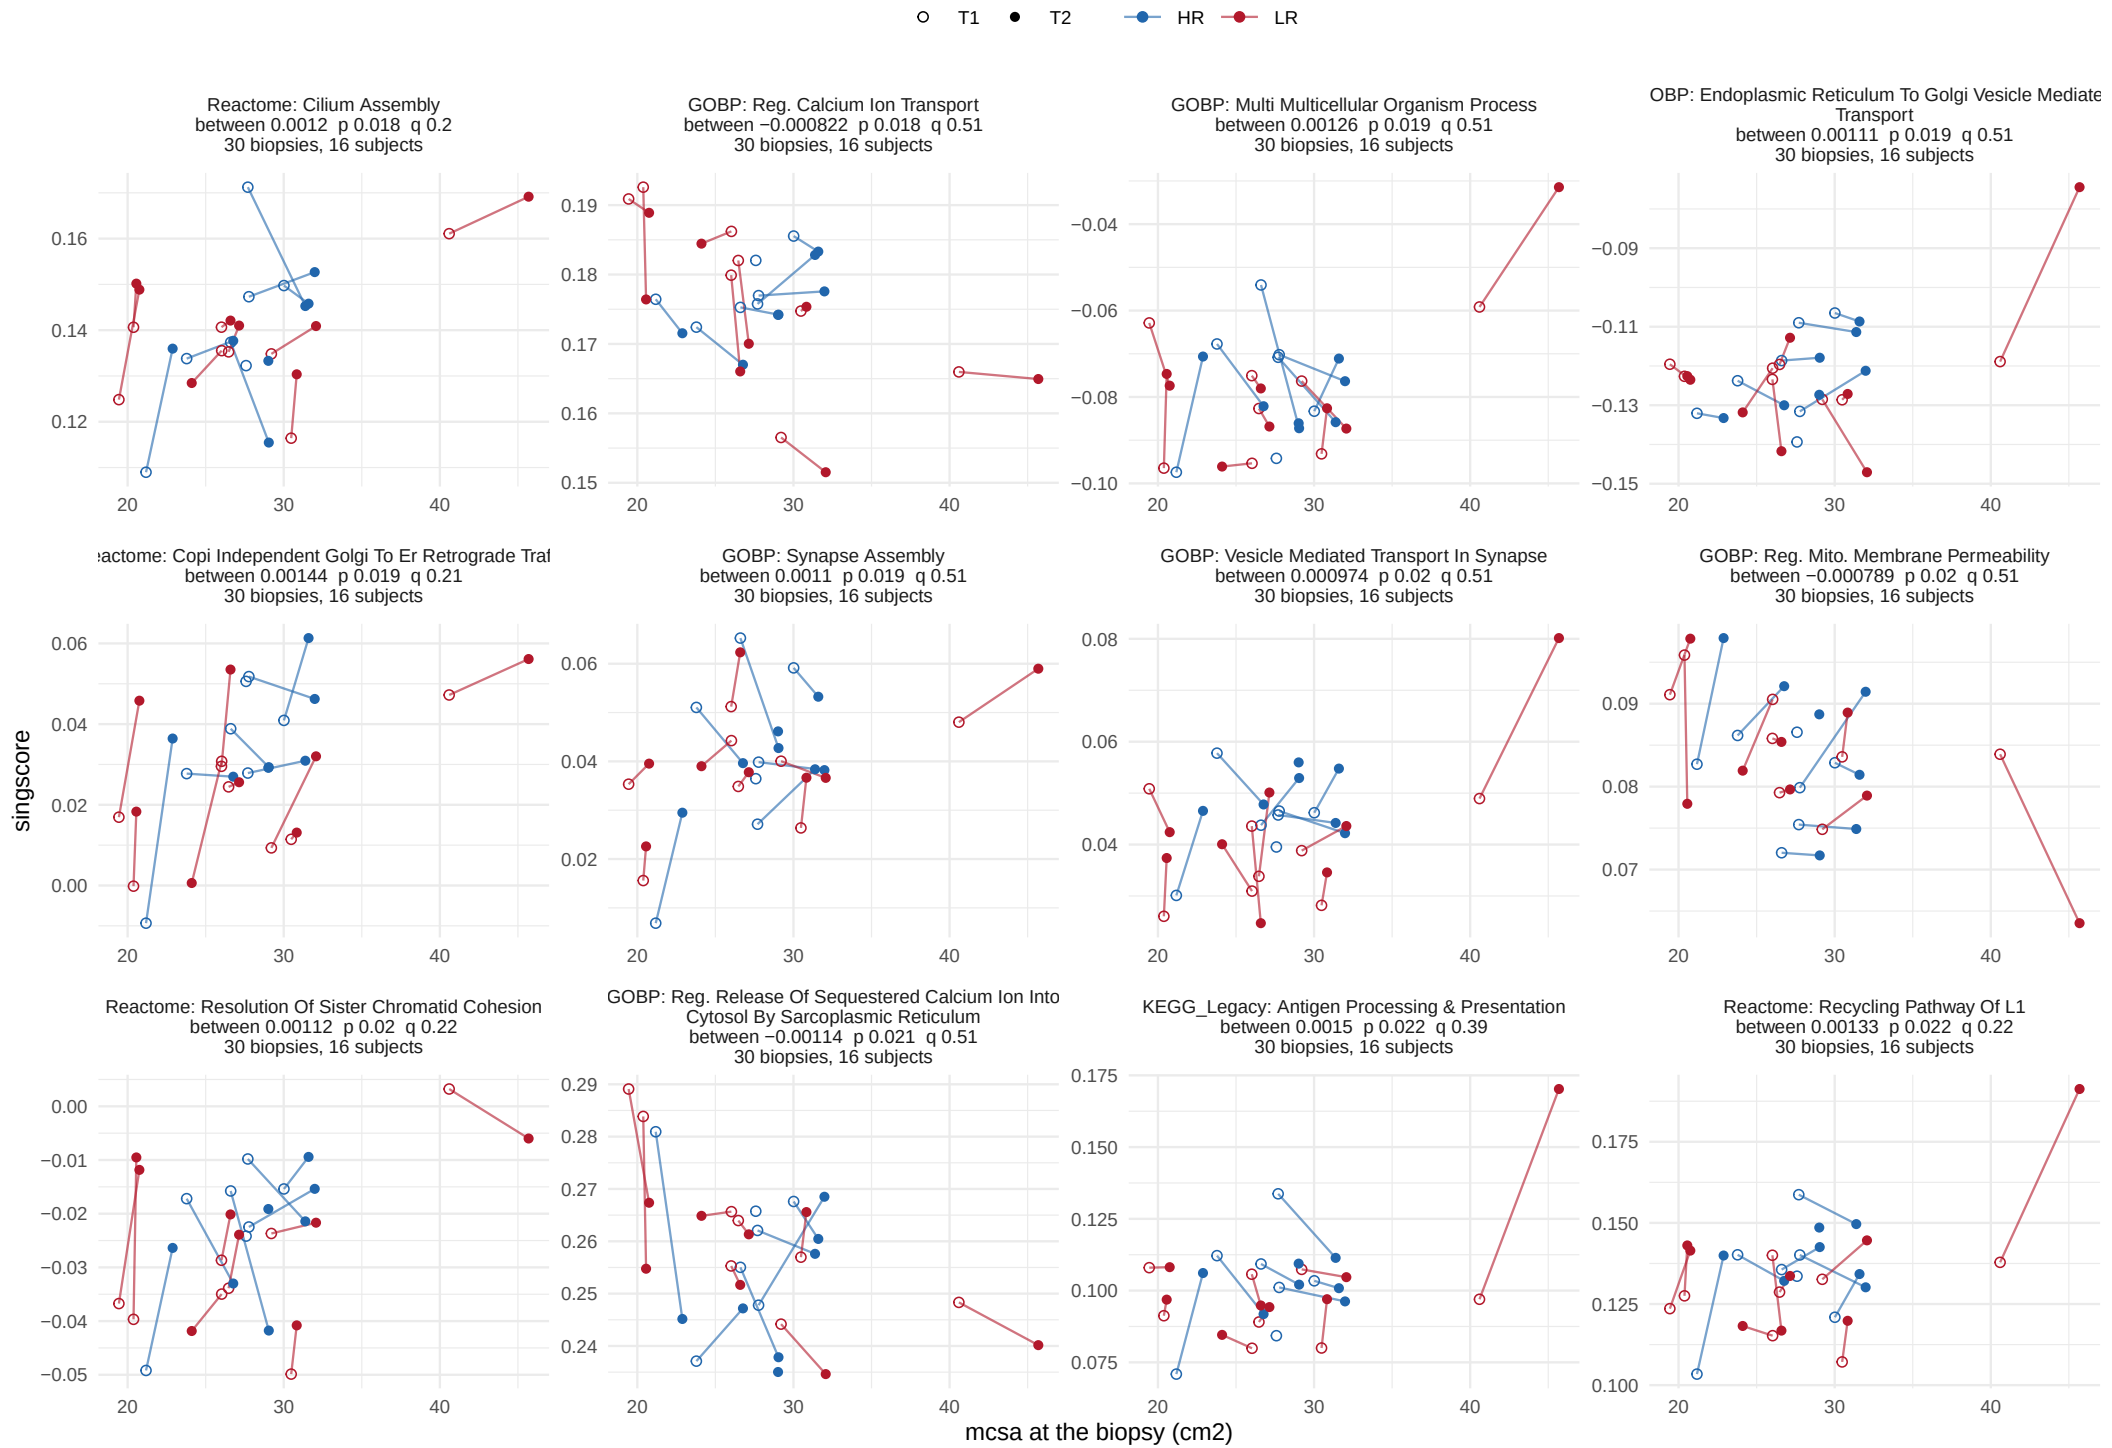


limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

## mcsa, between−person term


161 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 7 of 14.

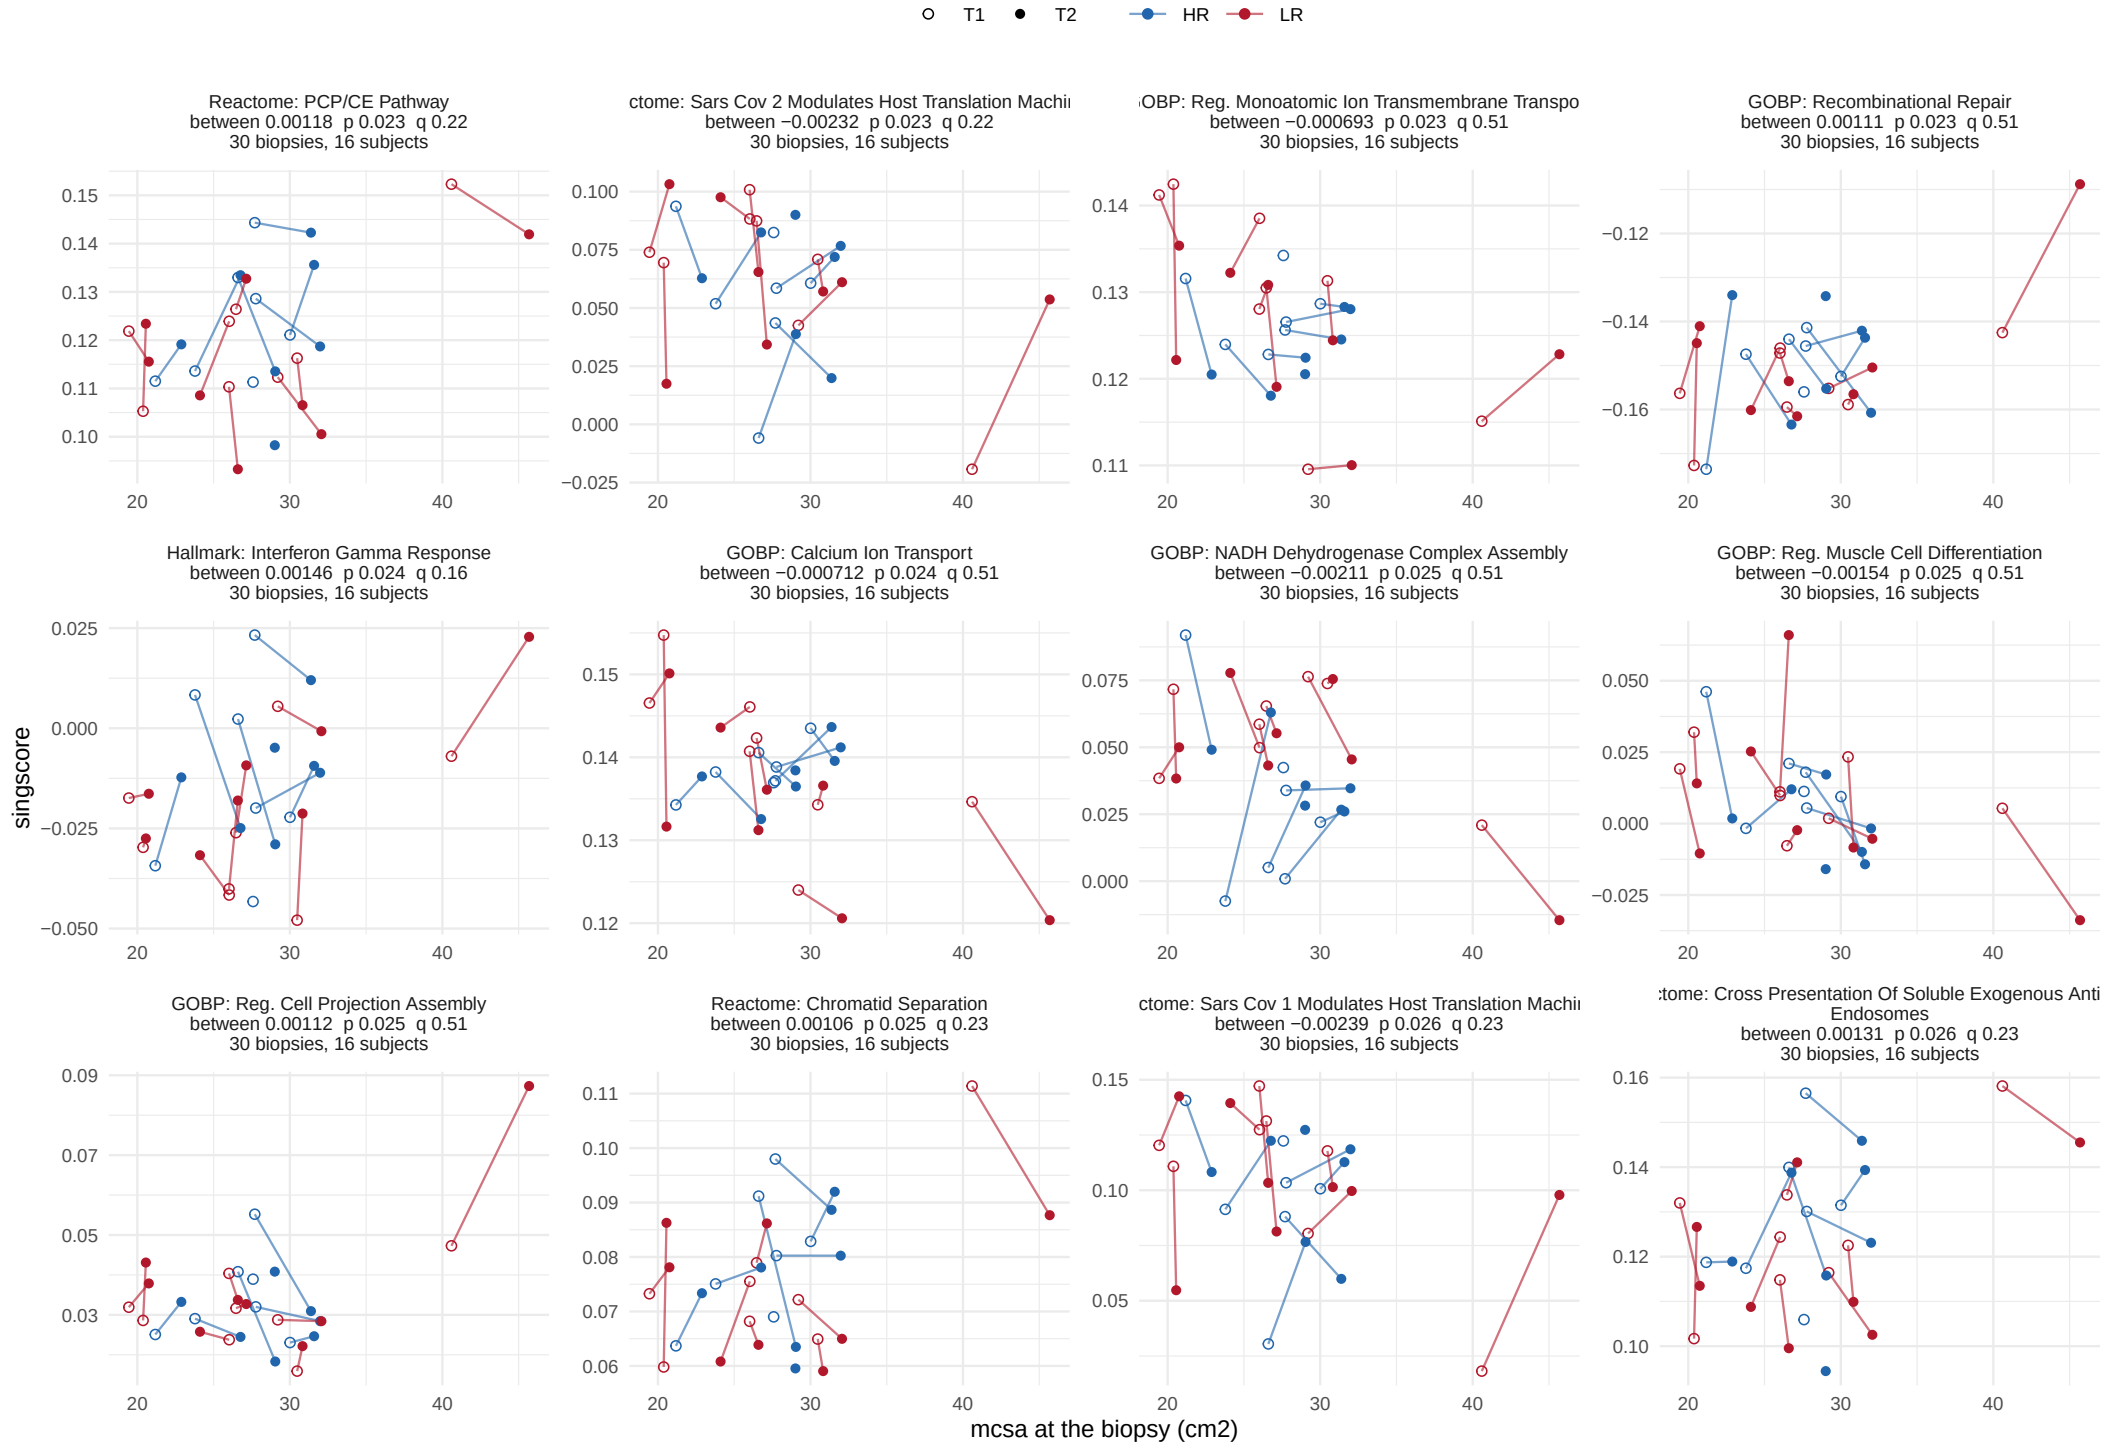


limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

## mcsa, between−person term


161 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 8 of 14.

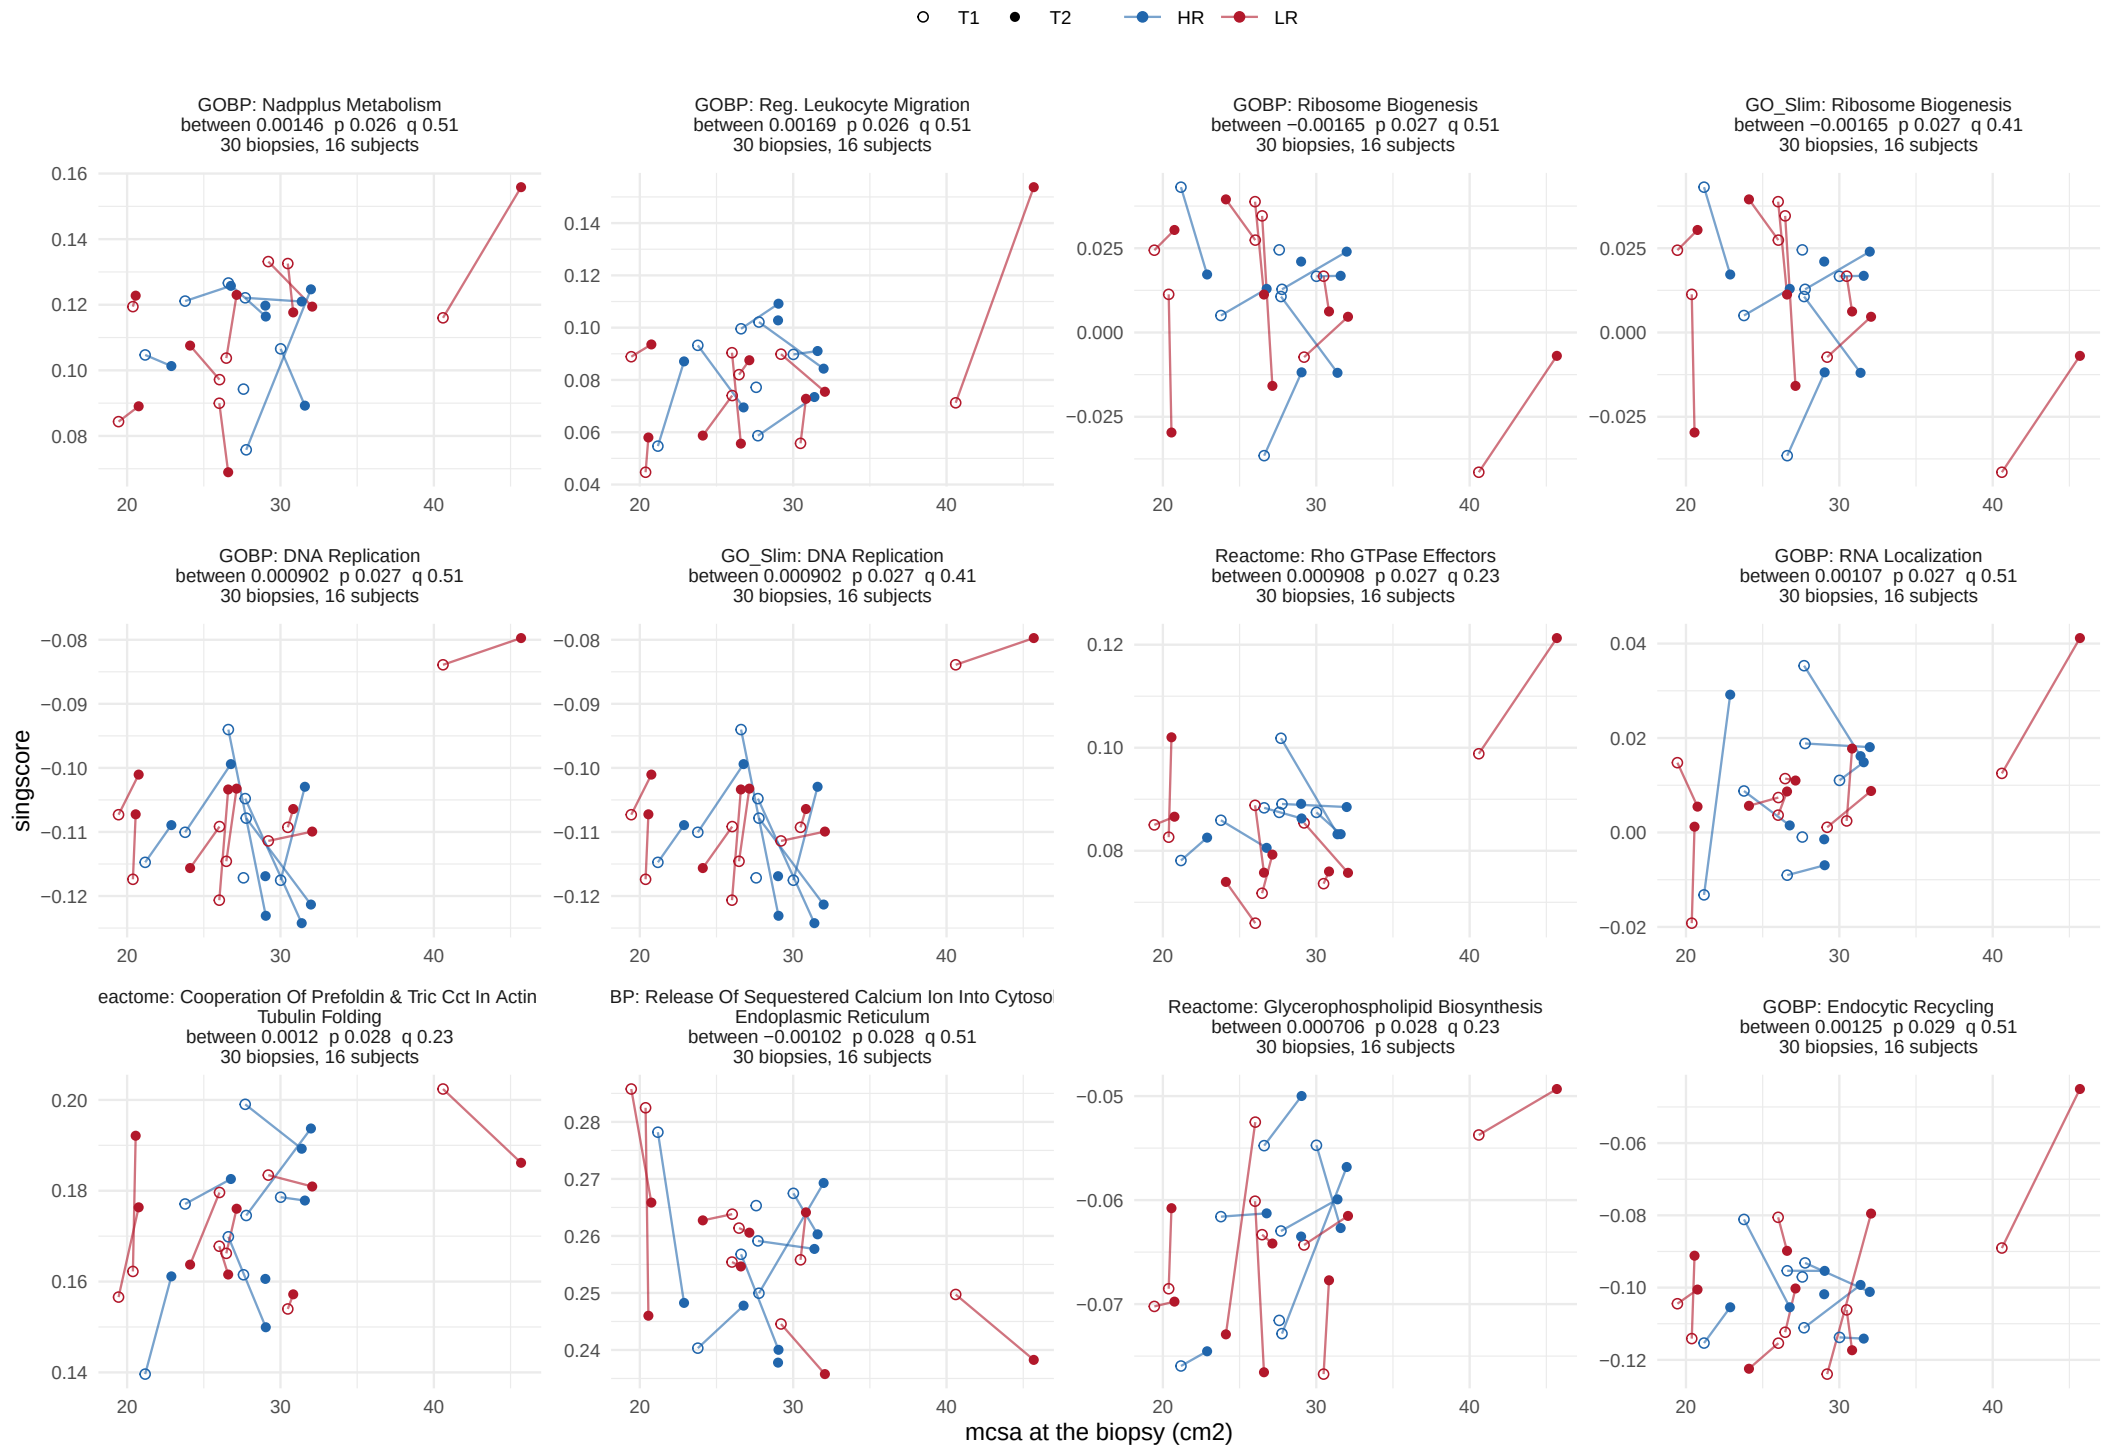


limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

## mcsa, between−person term


161 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 9 of 14.

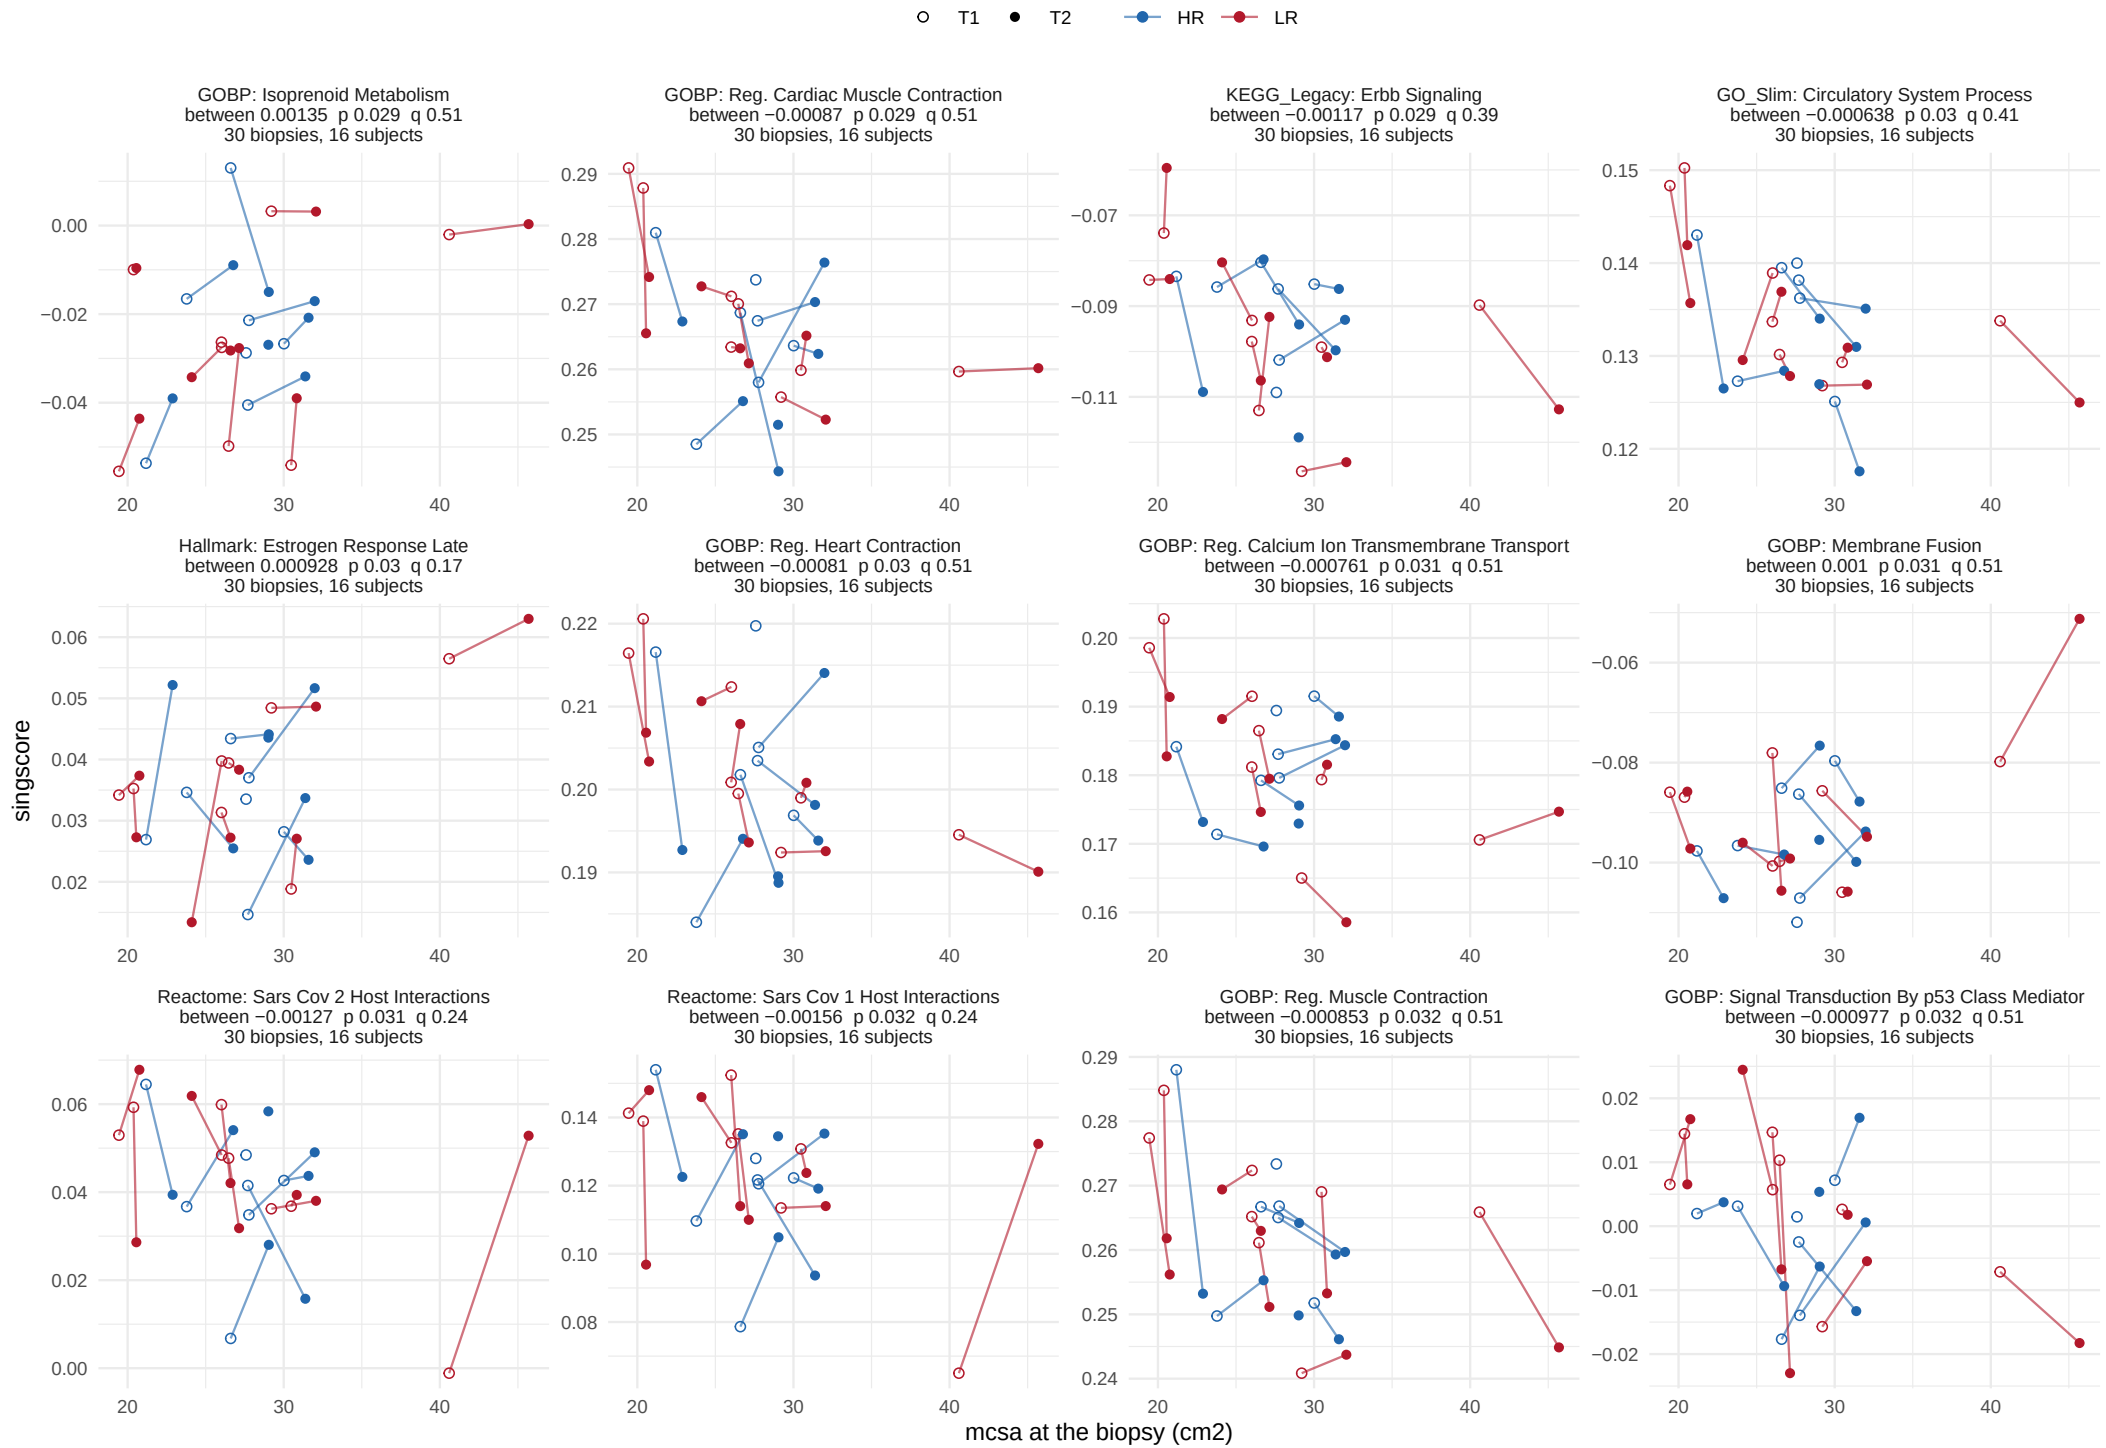


limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

## mcsa, between−person term


161 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 10 of 14.

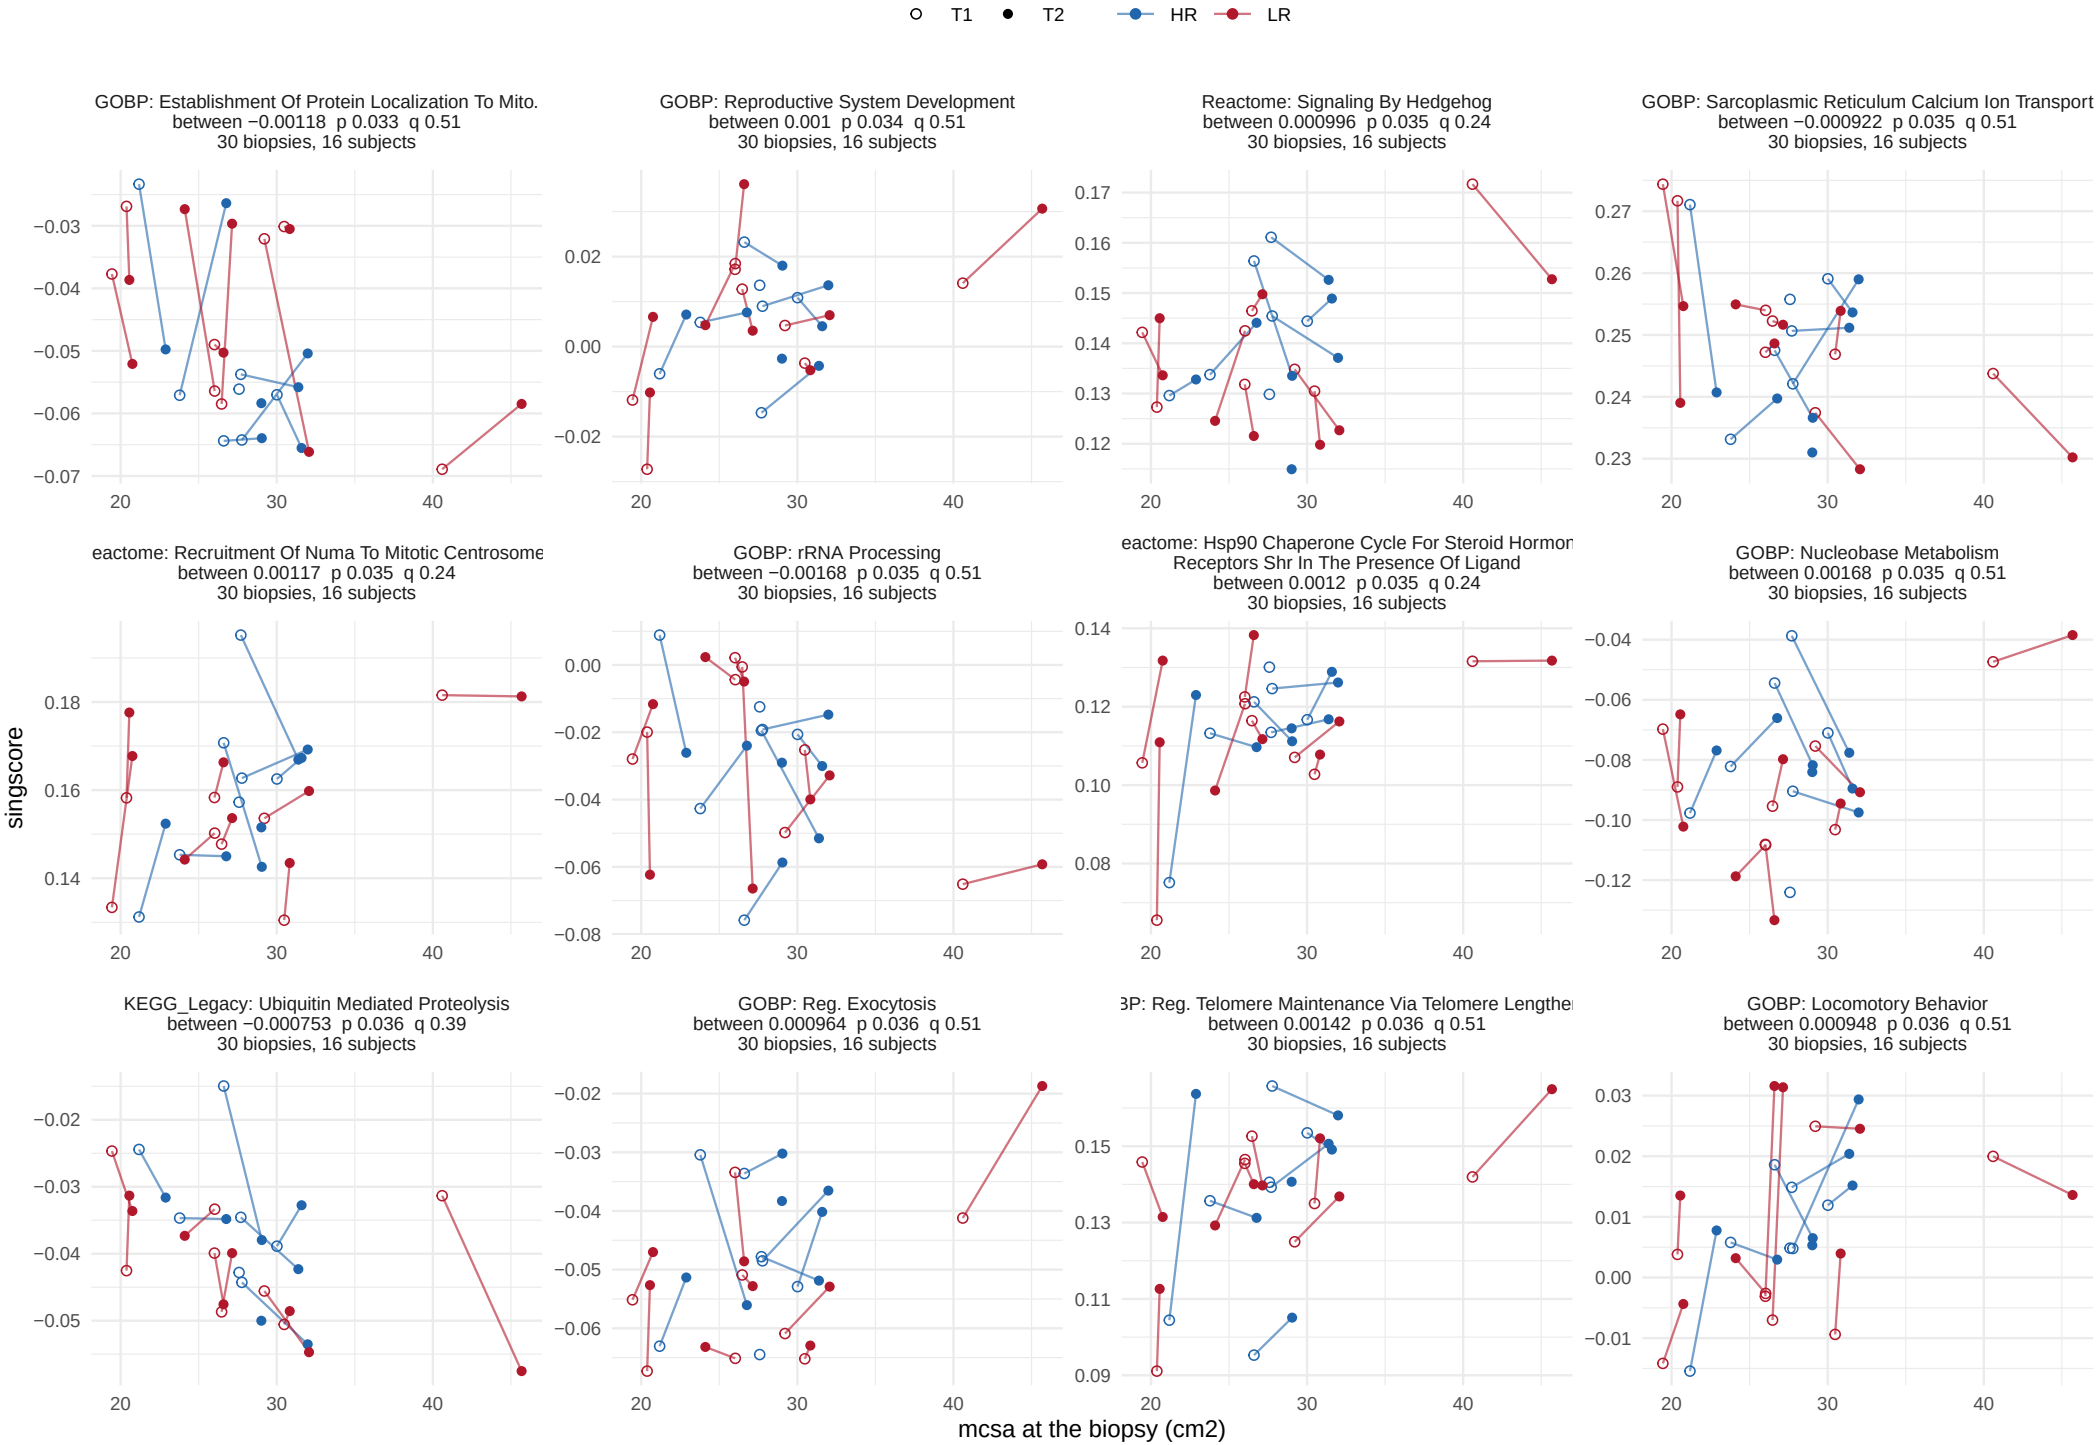


limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

## mcsa, between−person term


161 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 11 of 14.

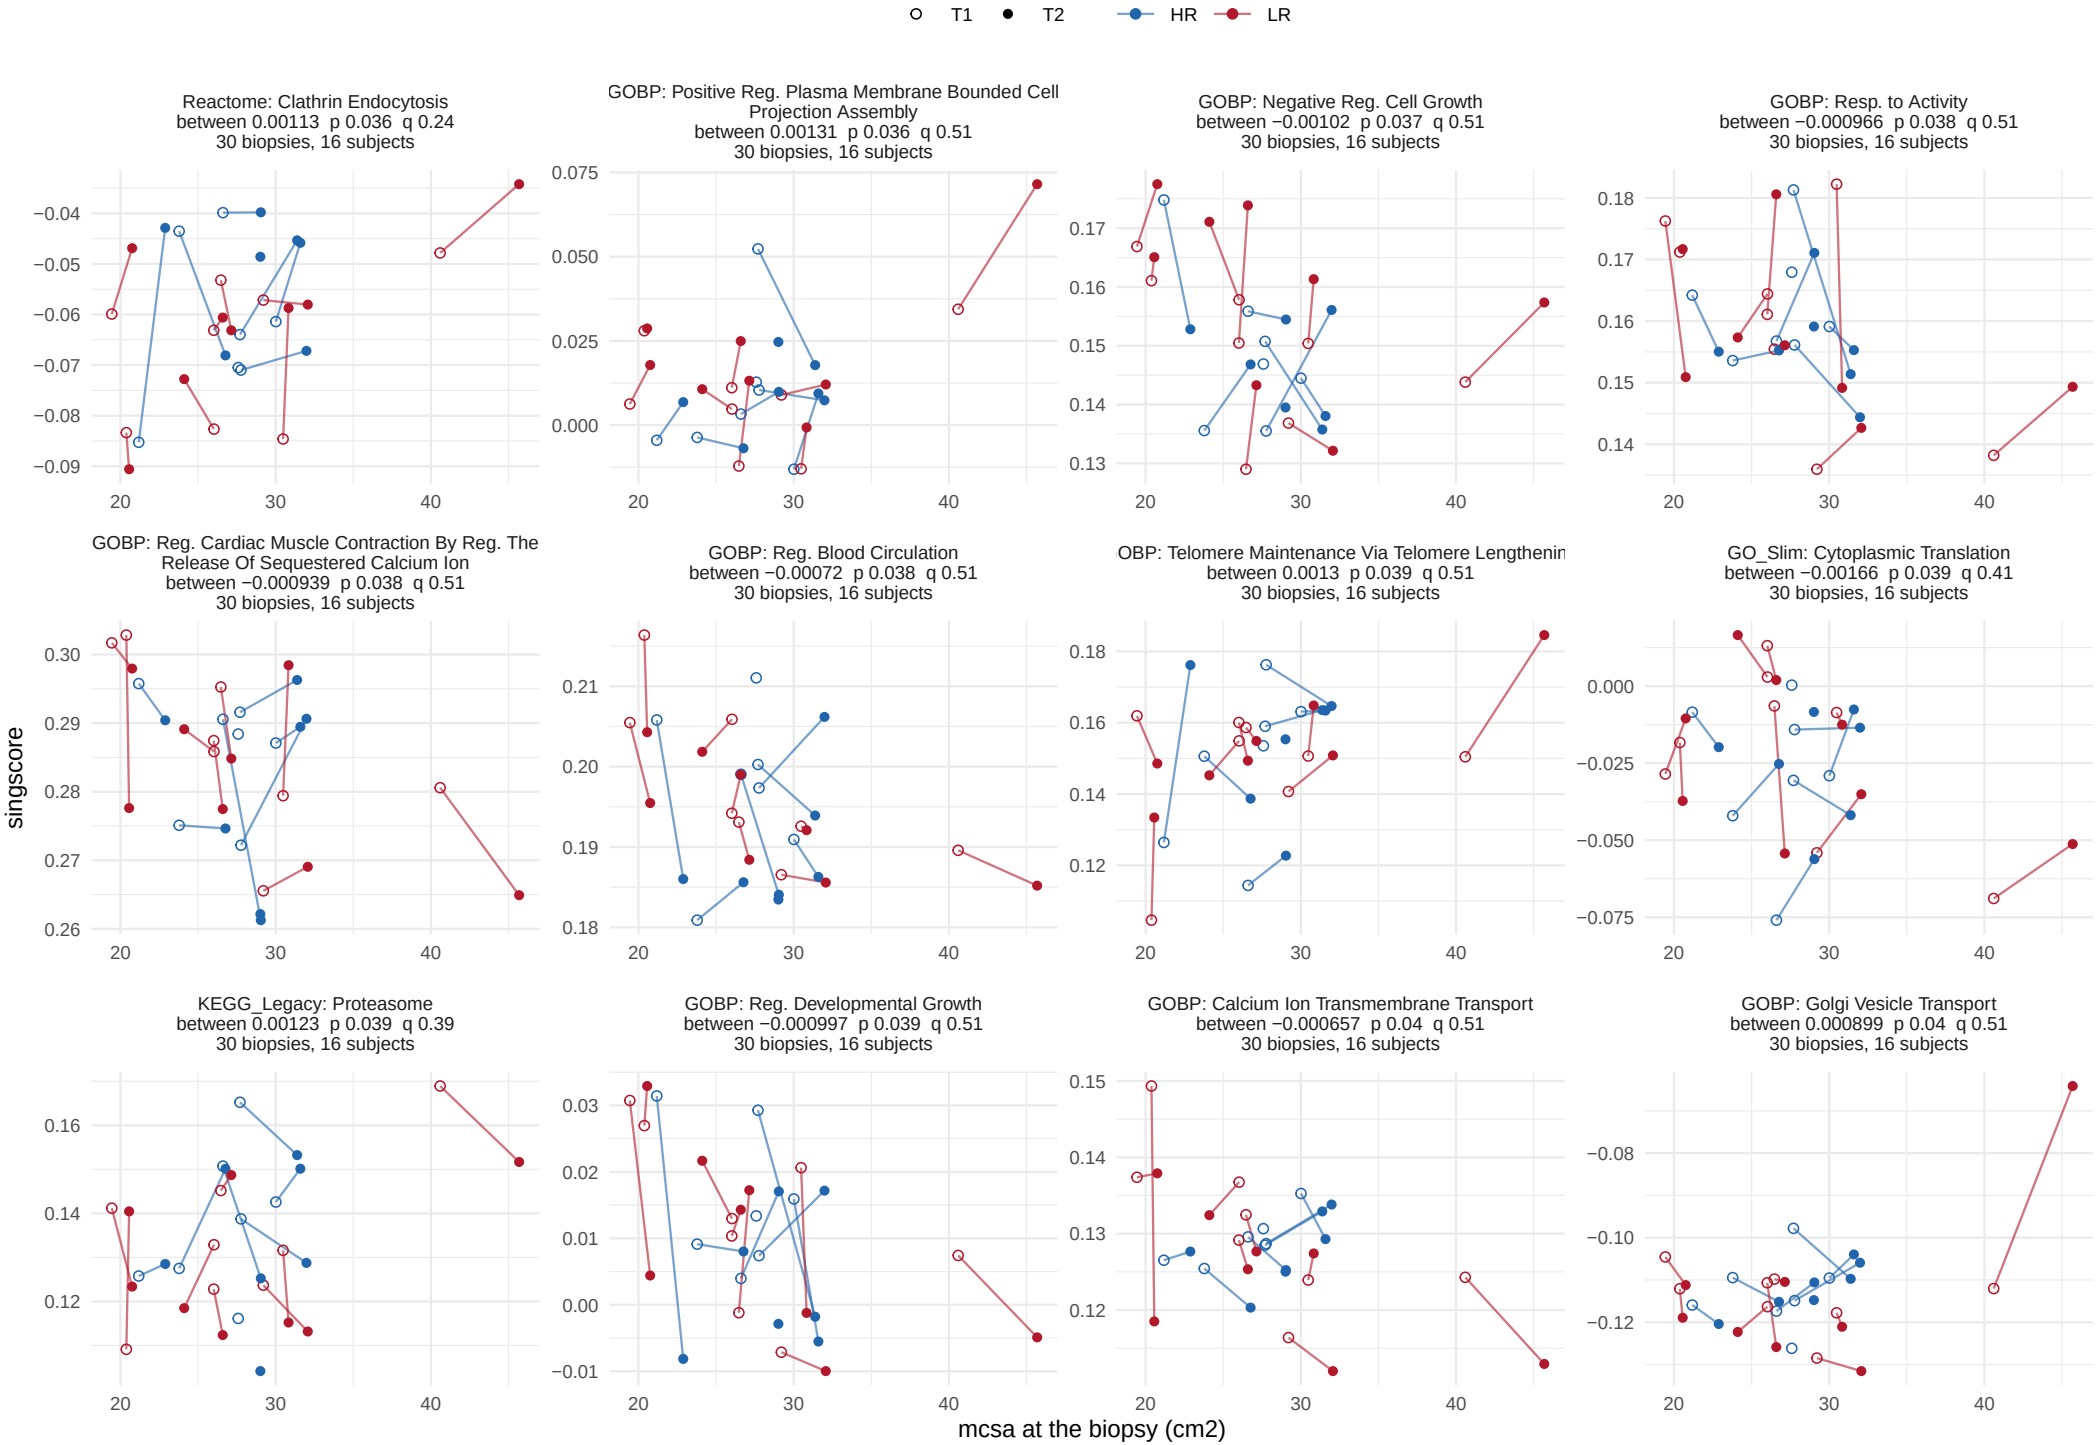


limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

## mcsa, between−person term


161 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 12 of 14.

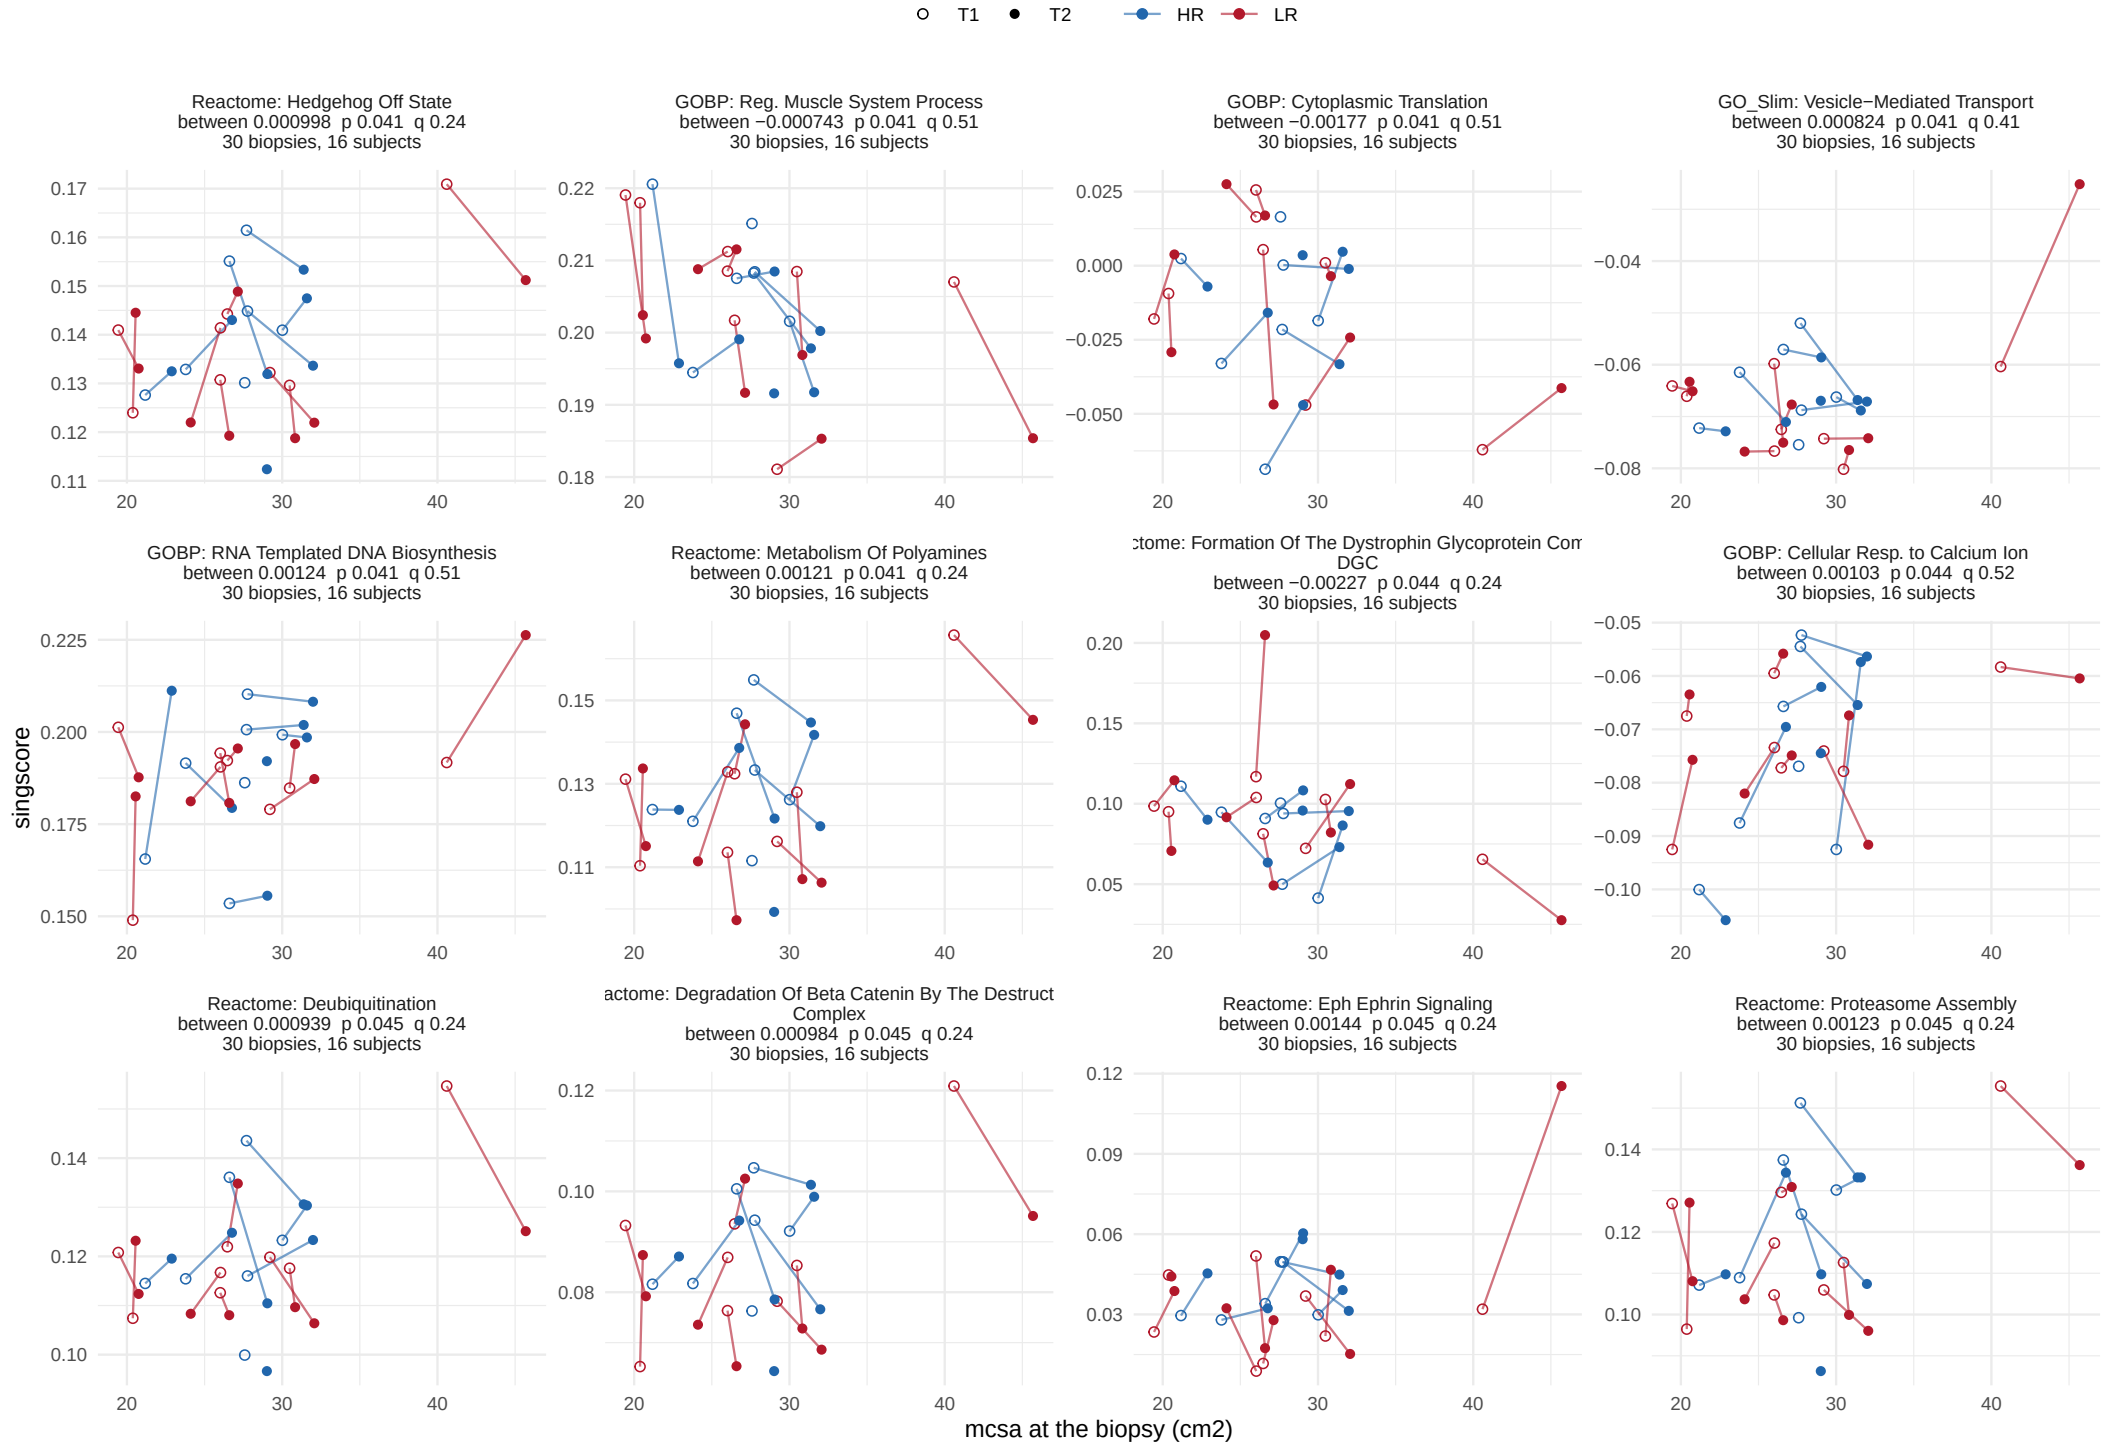


limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

## mcsa, between−person term


161 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 13 of 14.

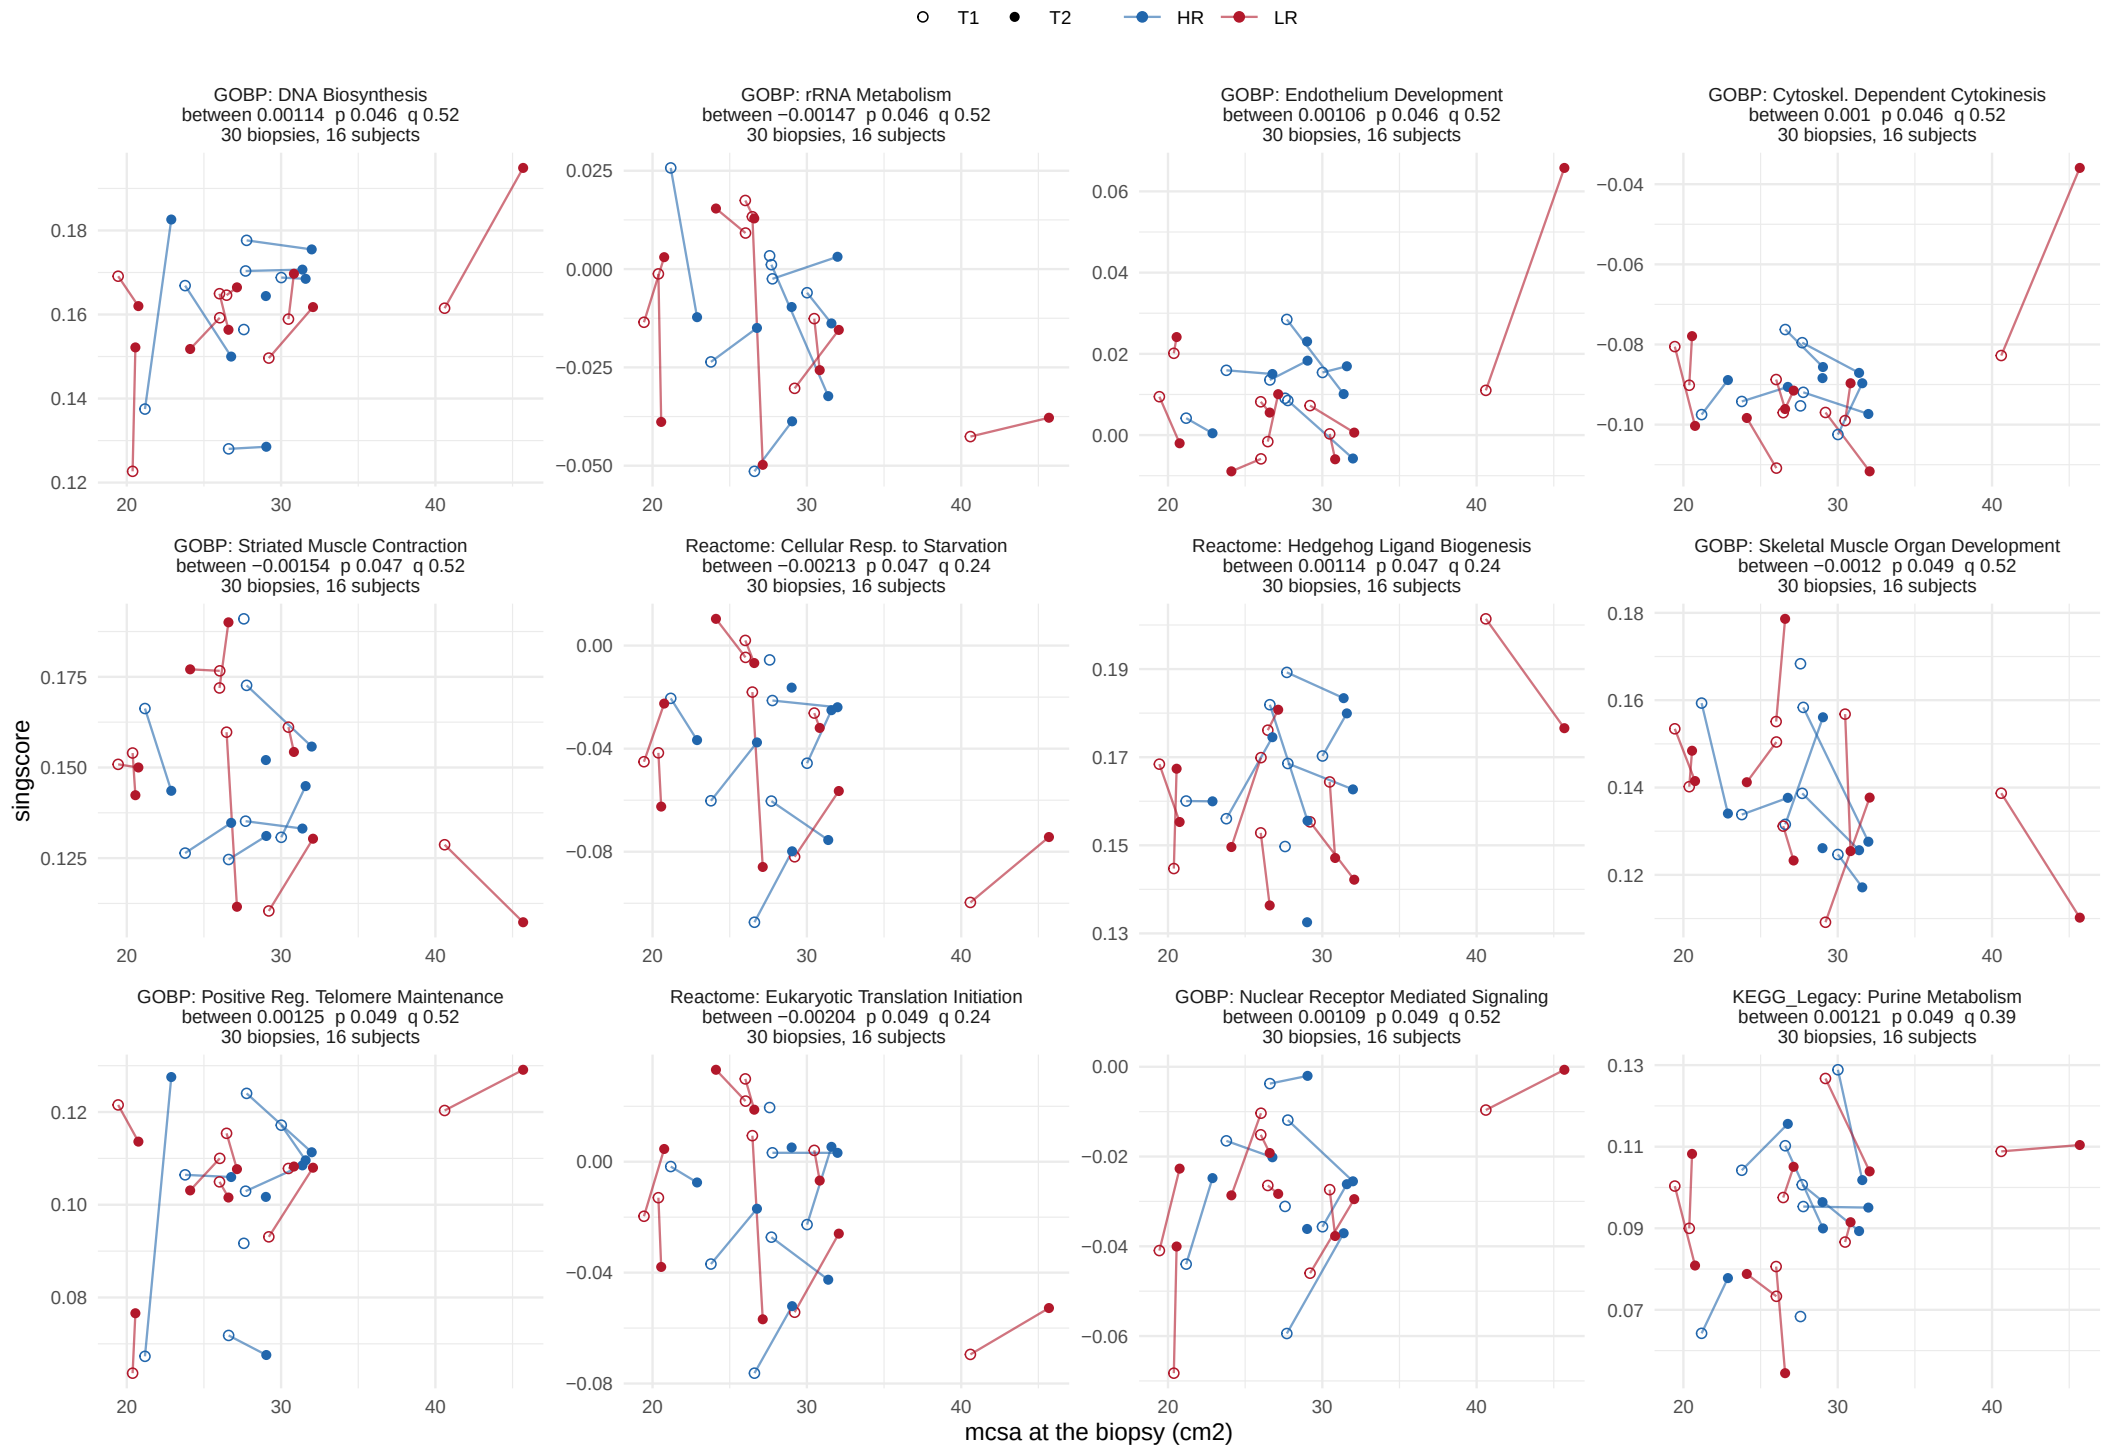


limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

## mcsa, between−person term


161 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 14 of 14.

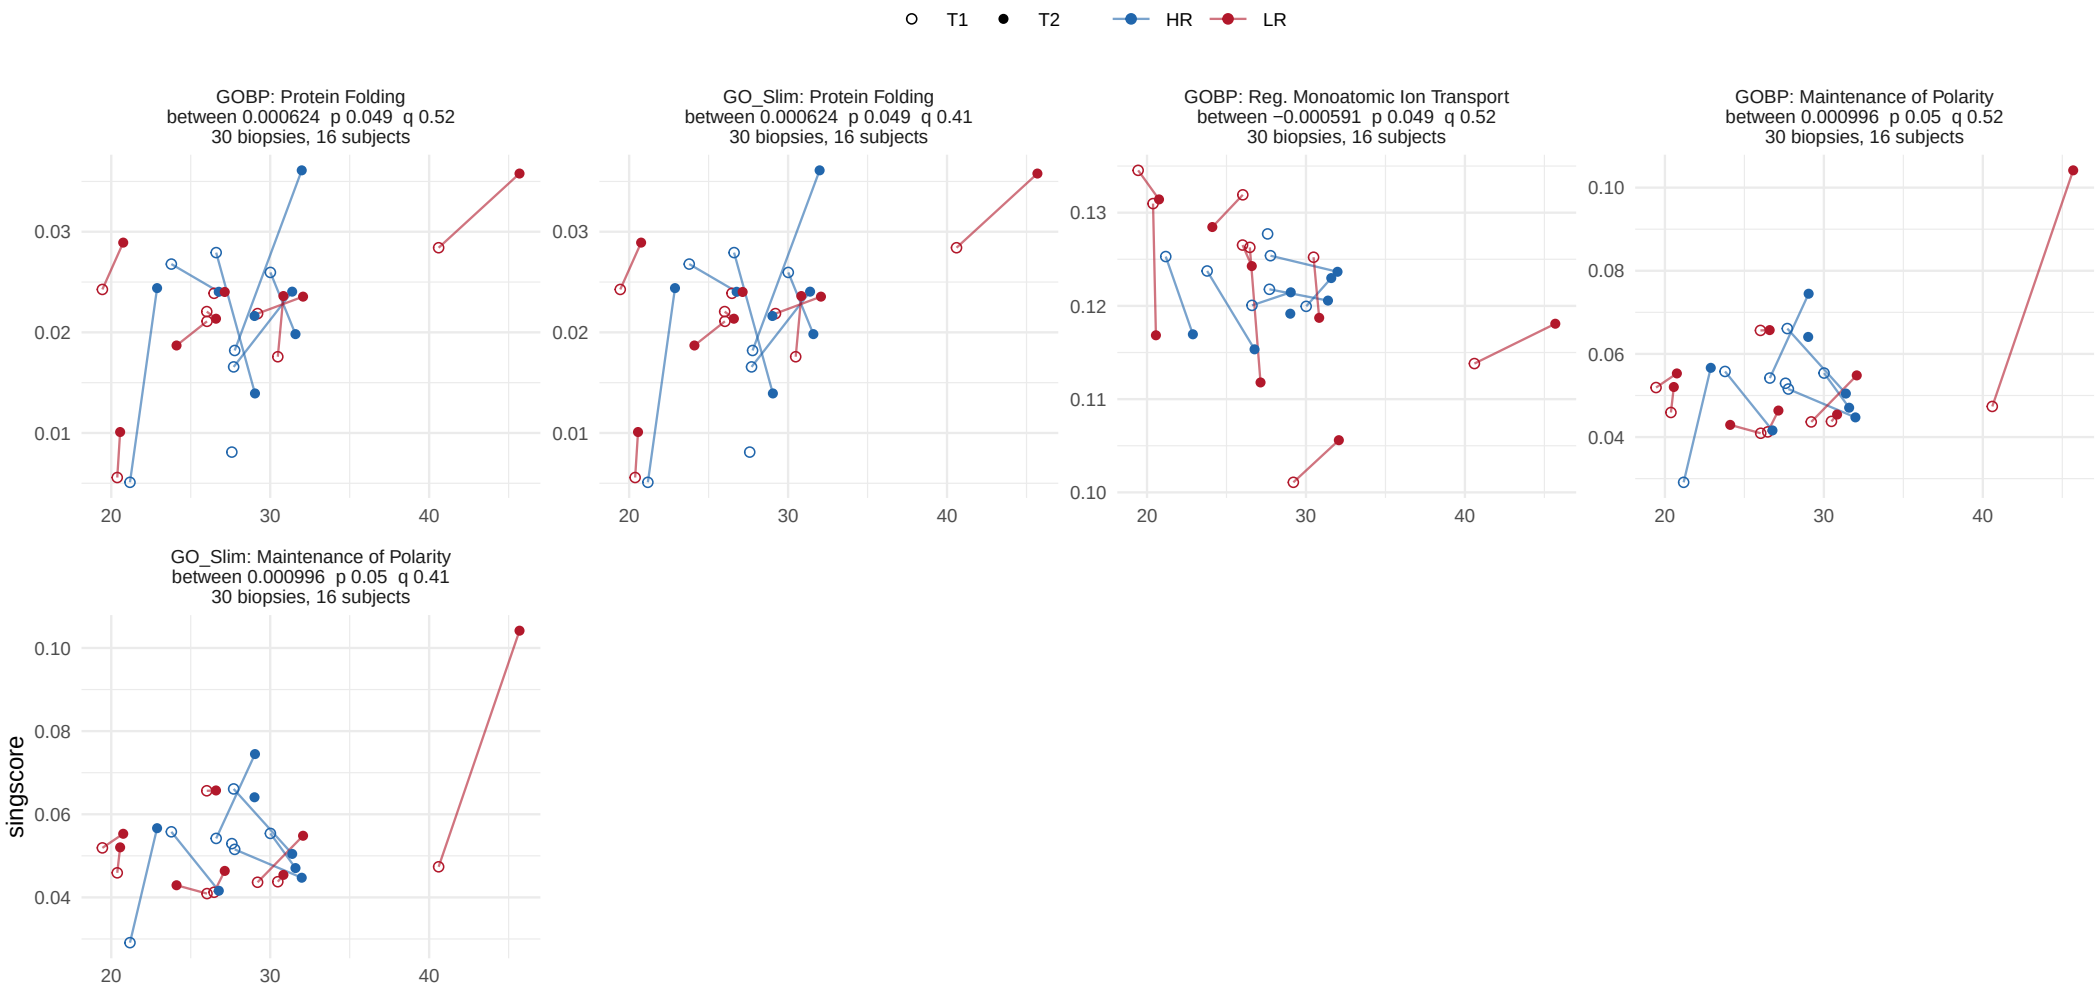


limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

# leg_press_1rm, within−person term


44 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 1 of 4.

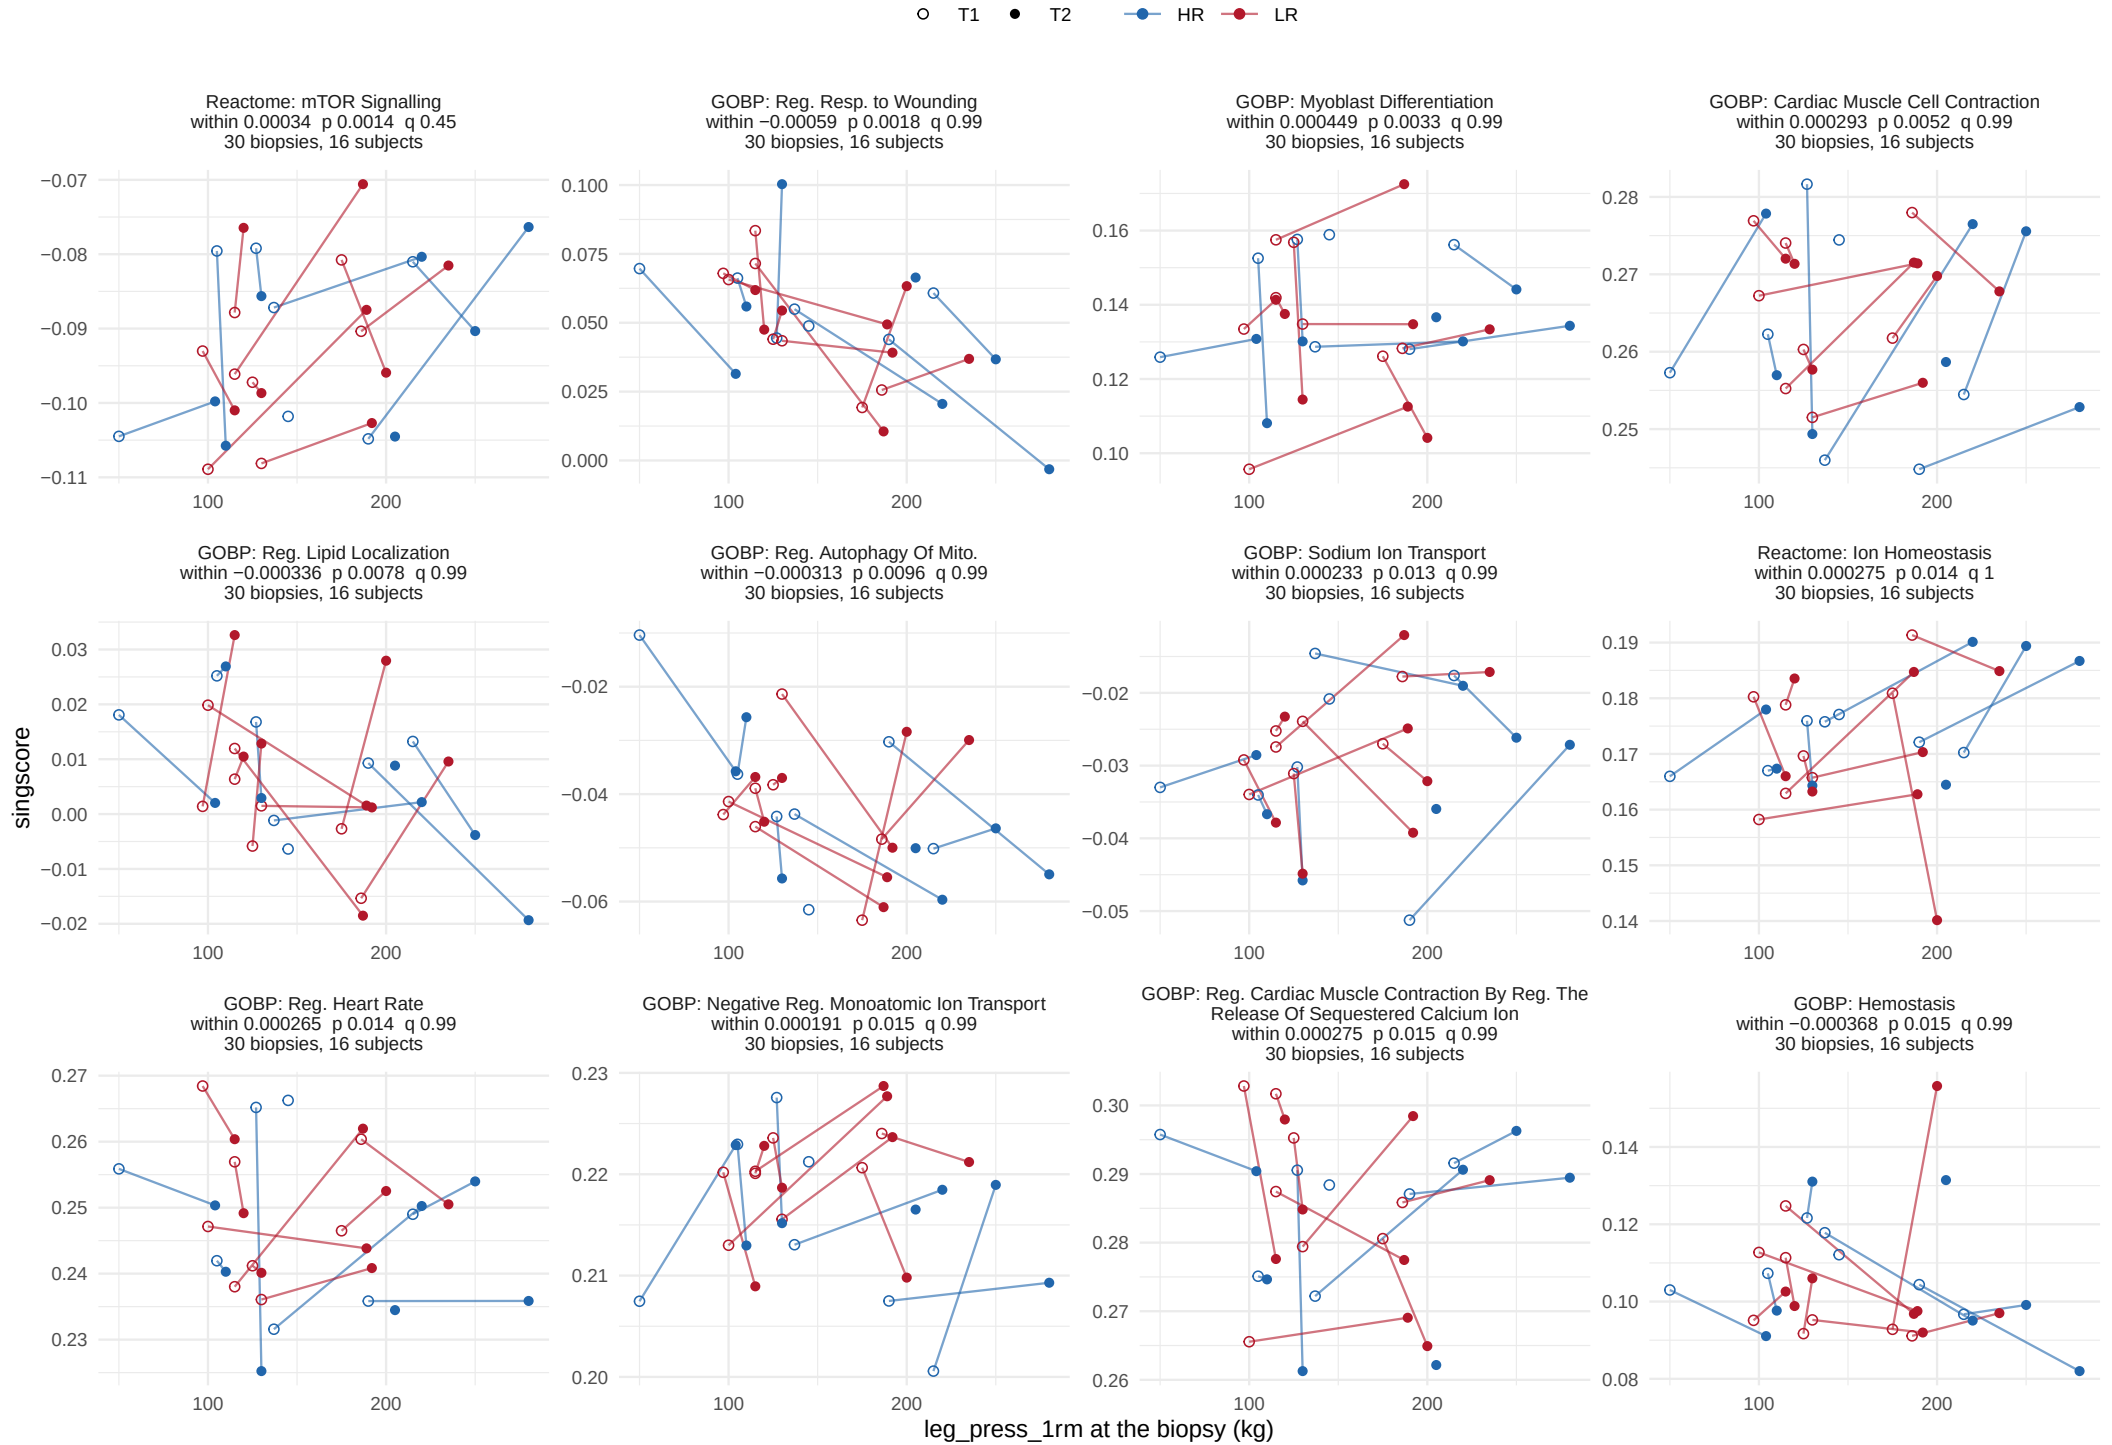


limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

# leg_press_1rm, within−person term


44 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 2 of 4.

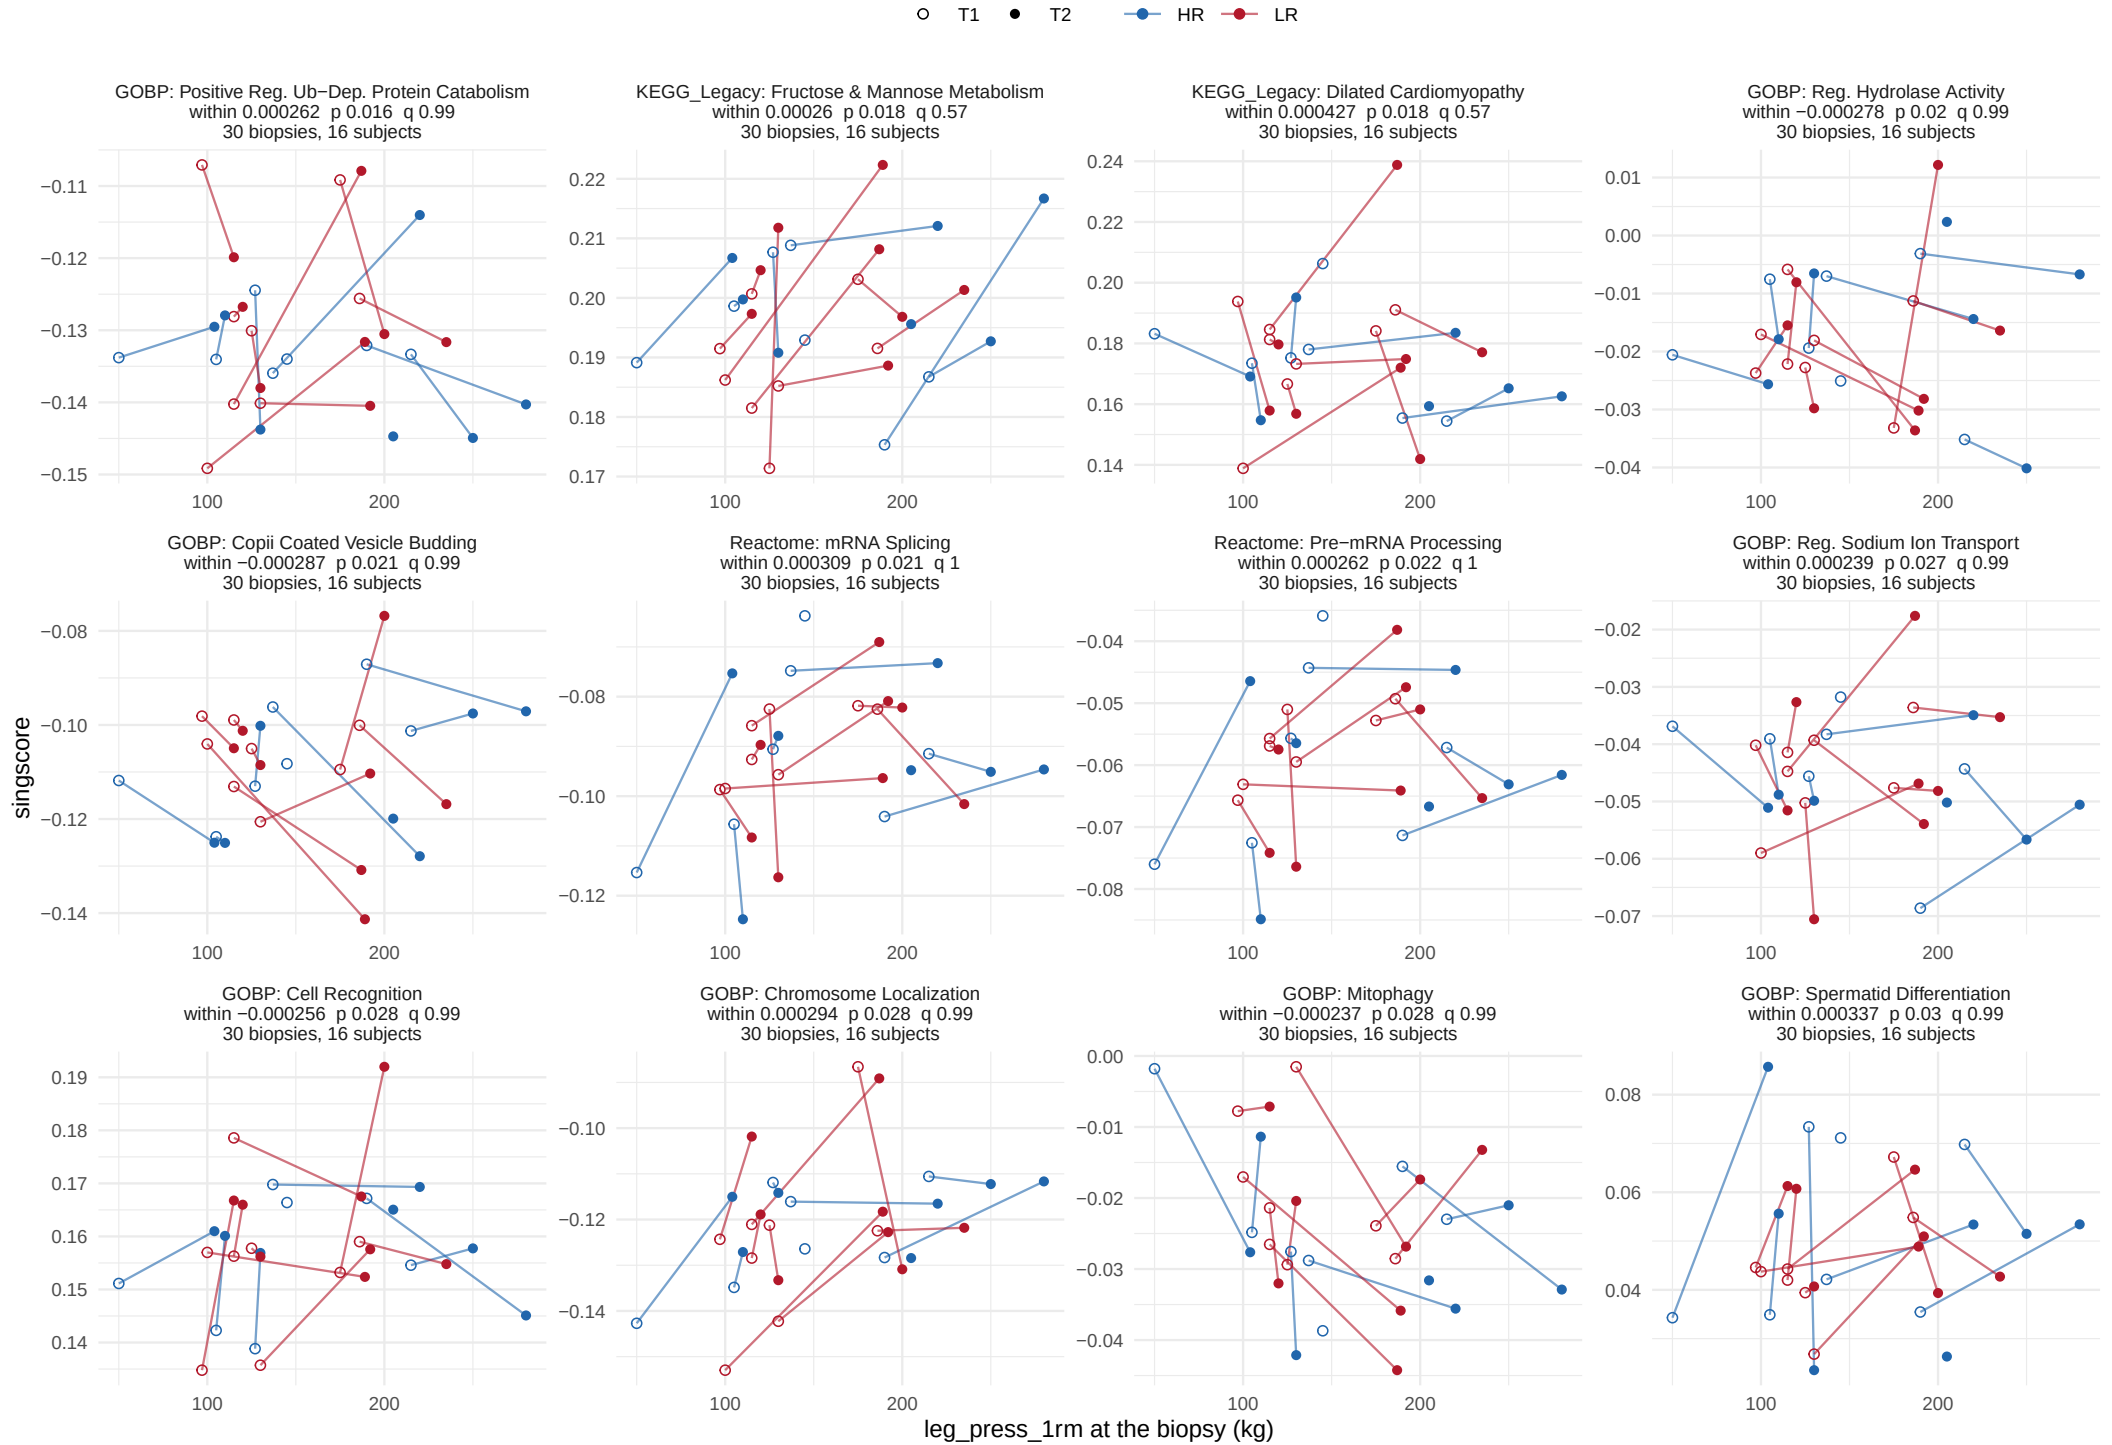


limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

## leg_press_1rm, within−person term


44 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 3 of 4.

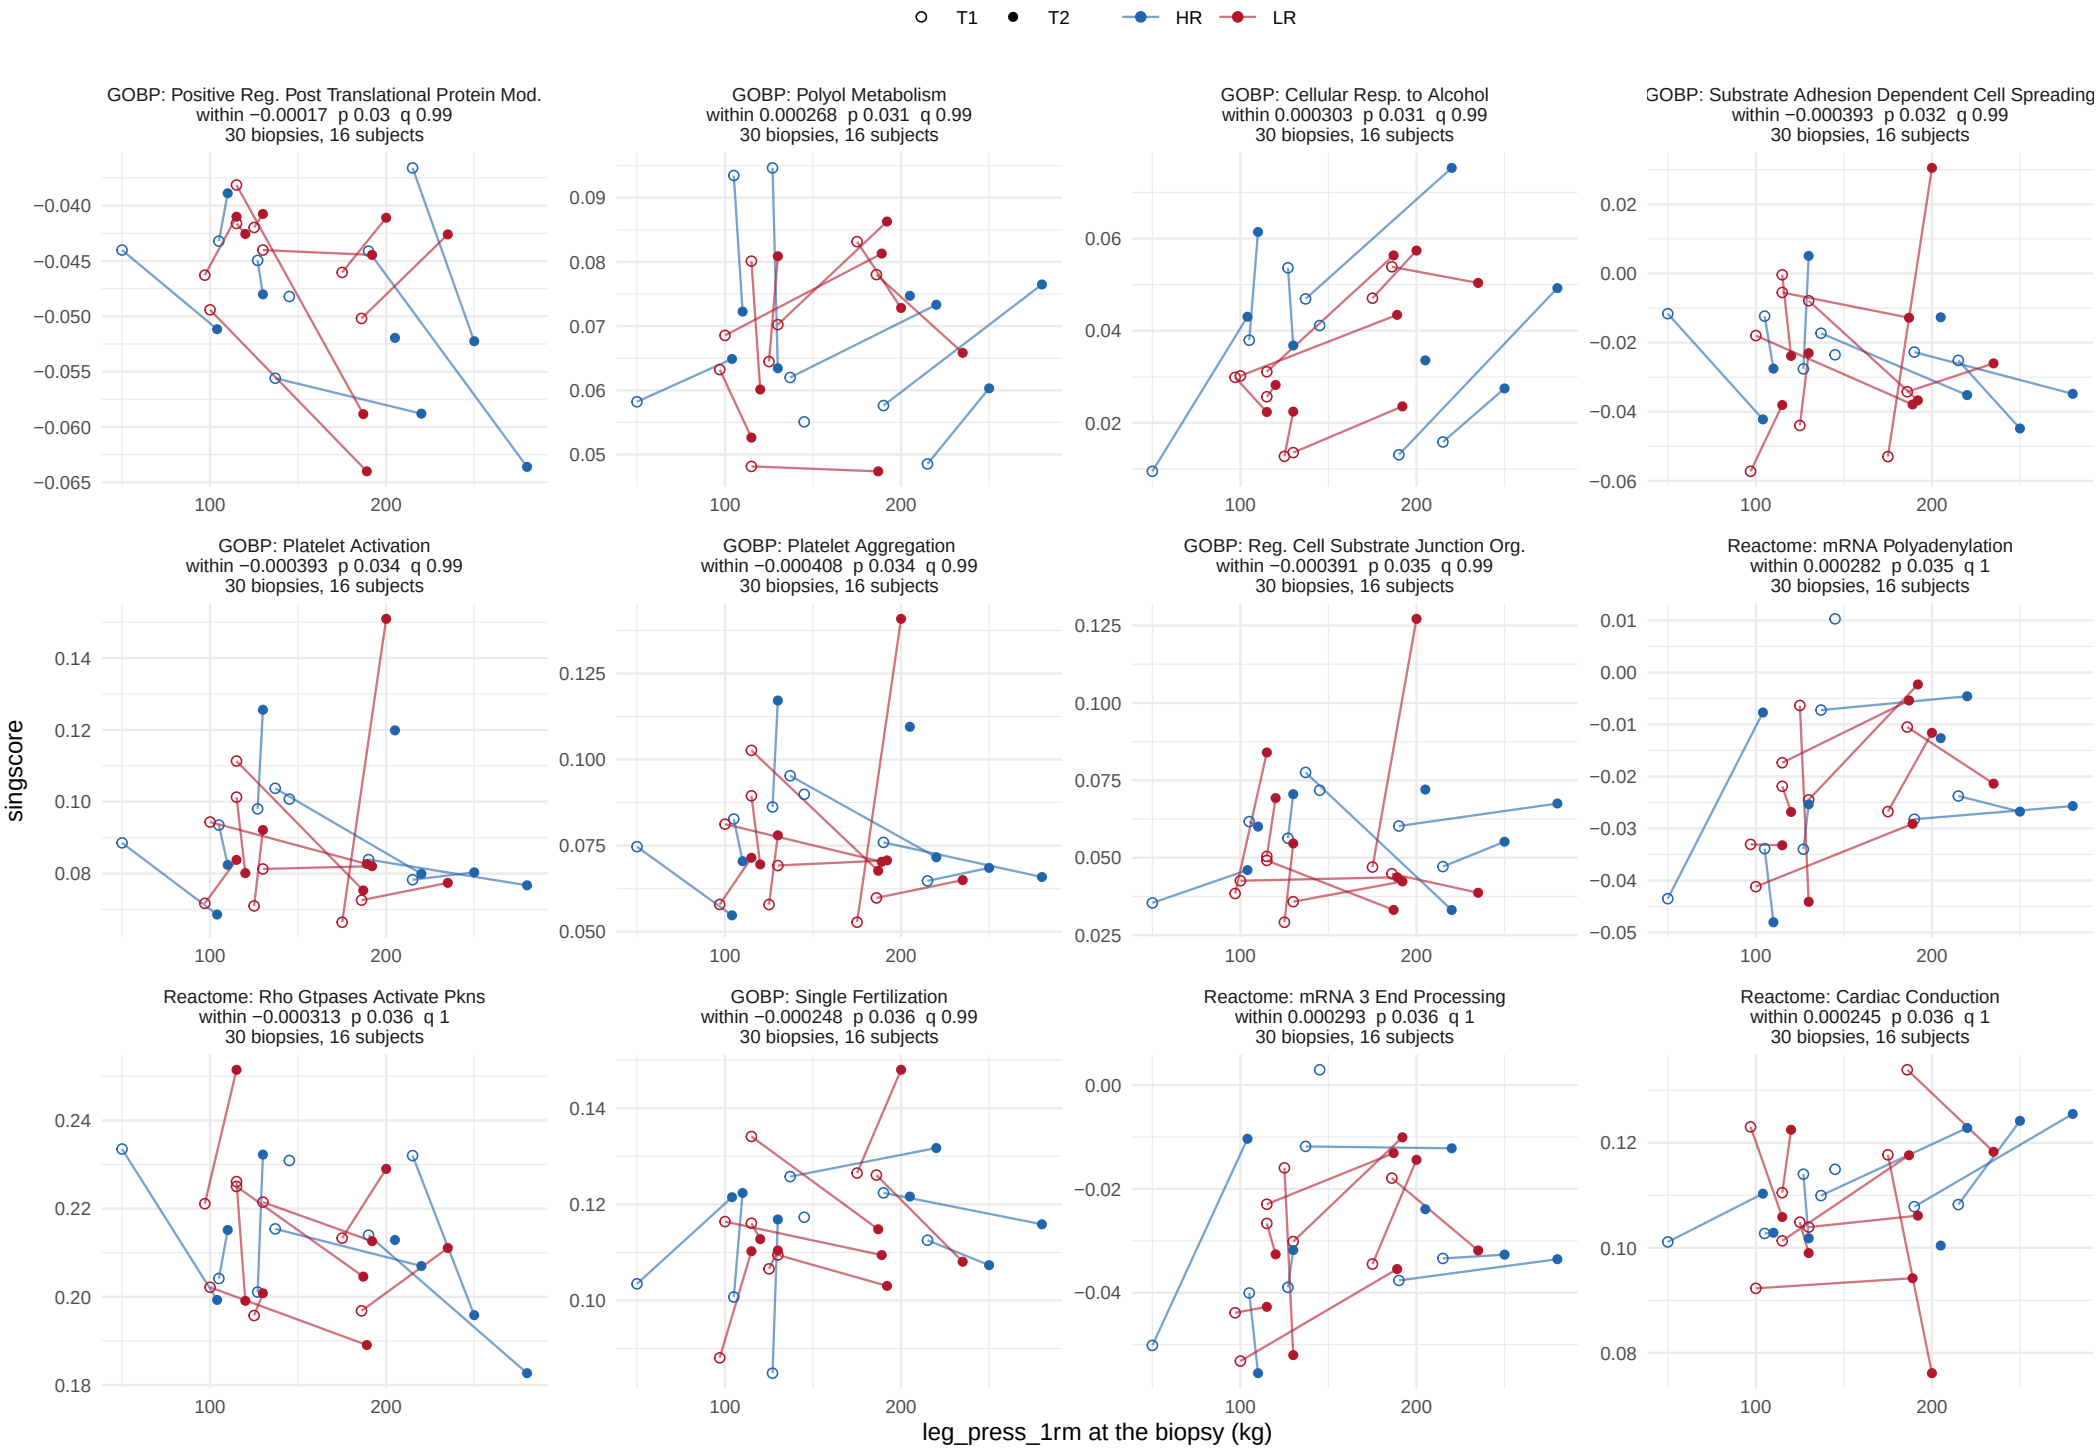


limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

# leg_press_1rm, within−person term


44 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 4 of 4.

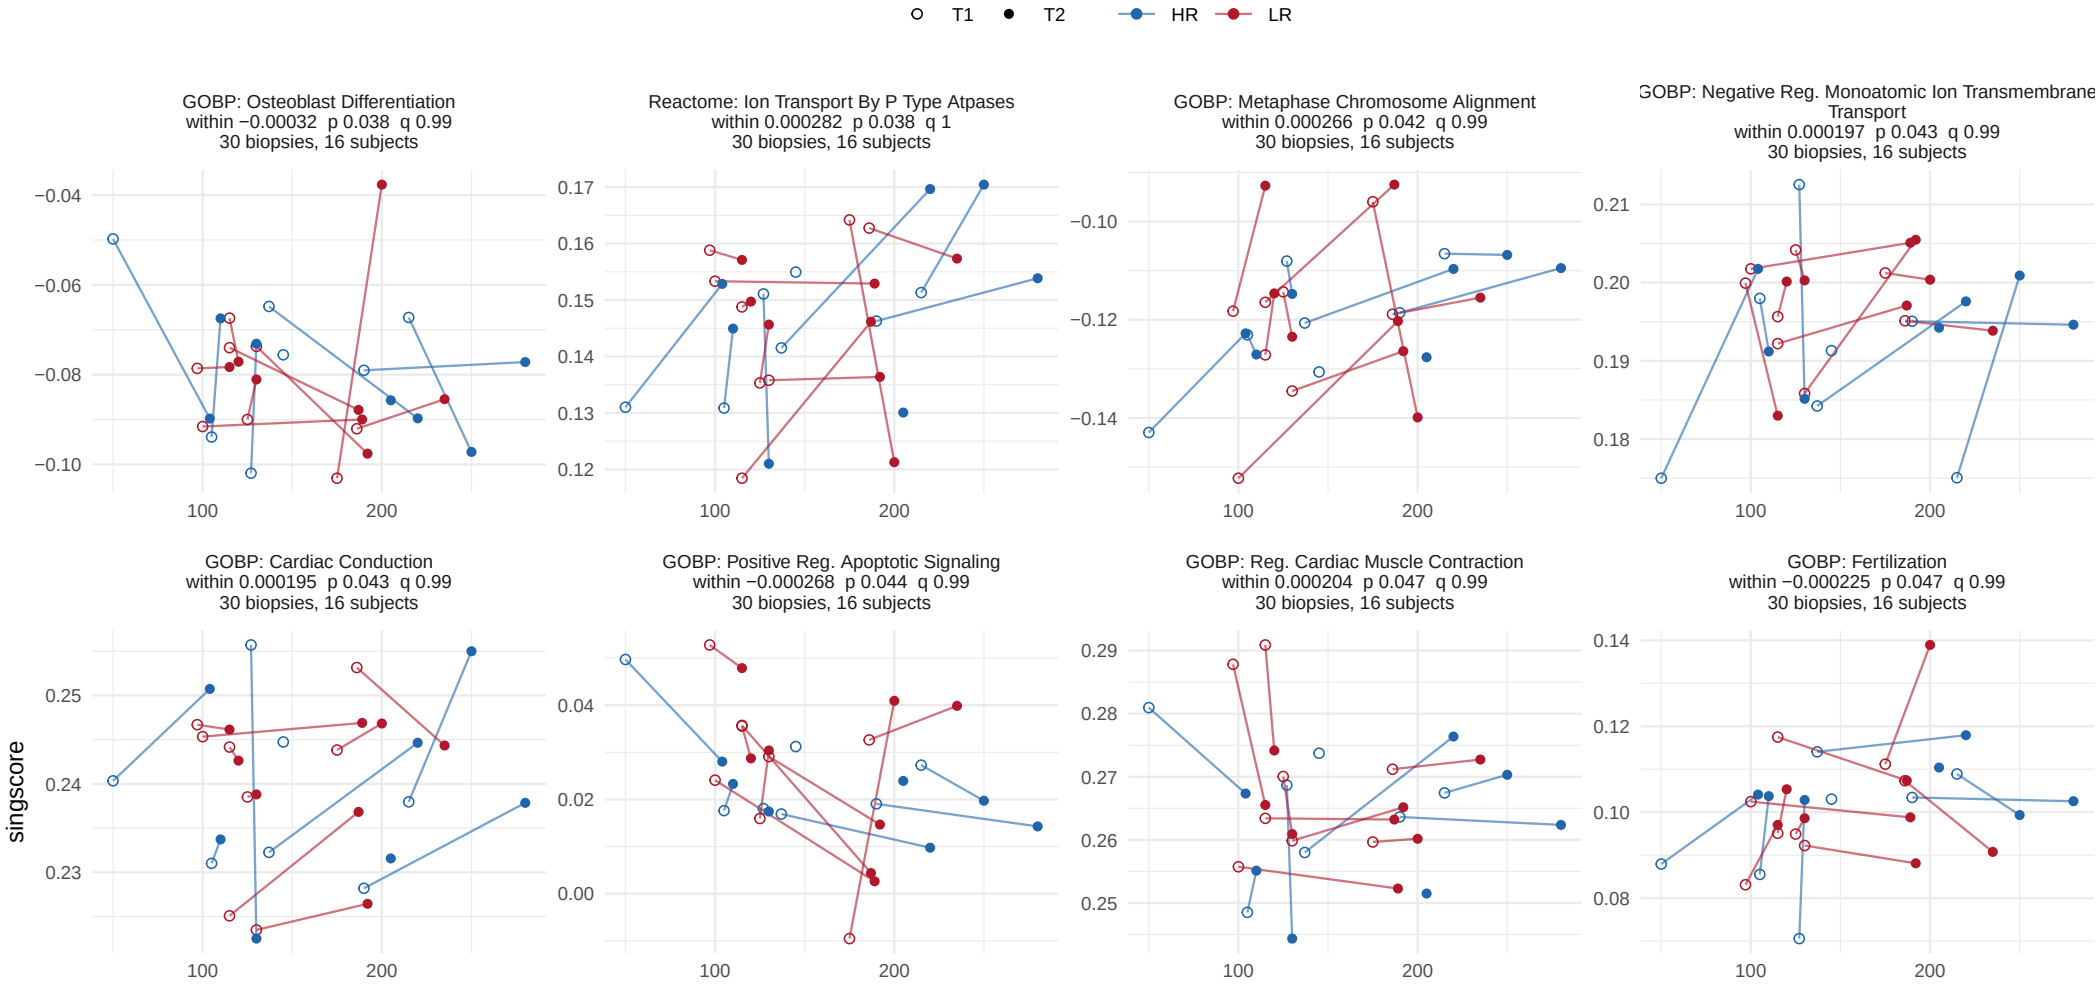


limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

## leg_press_1rm, between−person term


38 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 1 of 4.

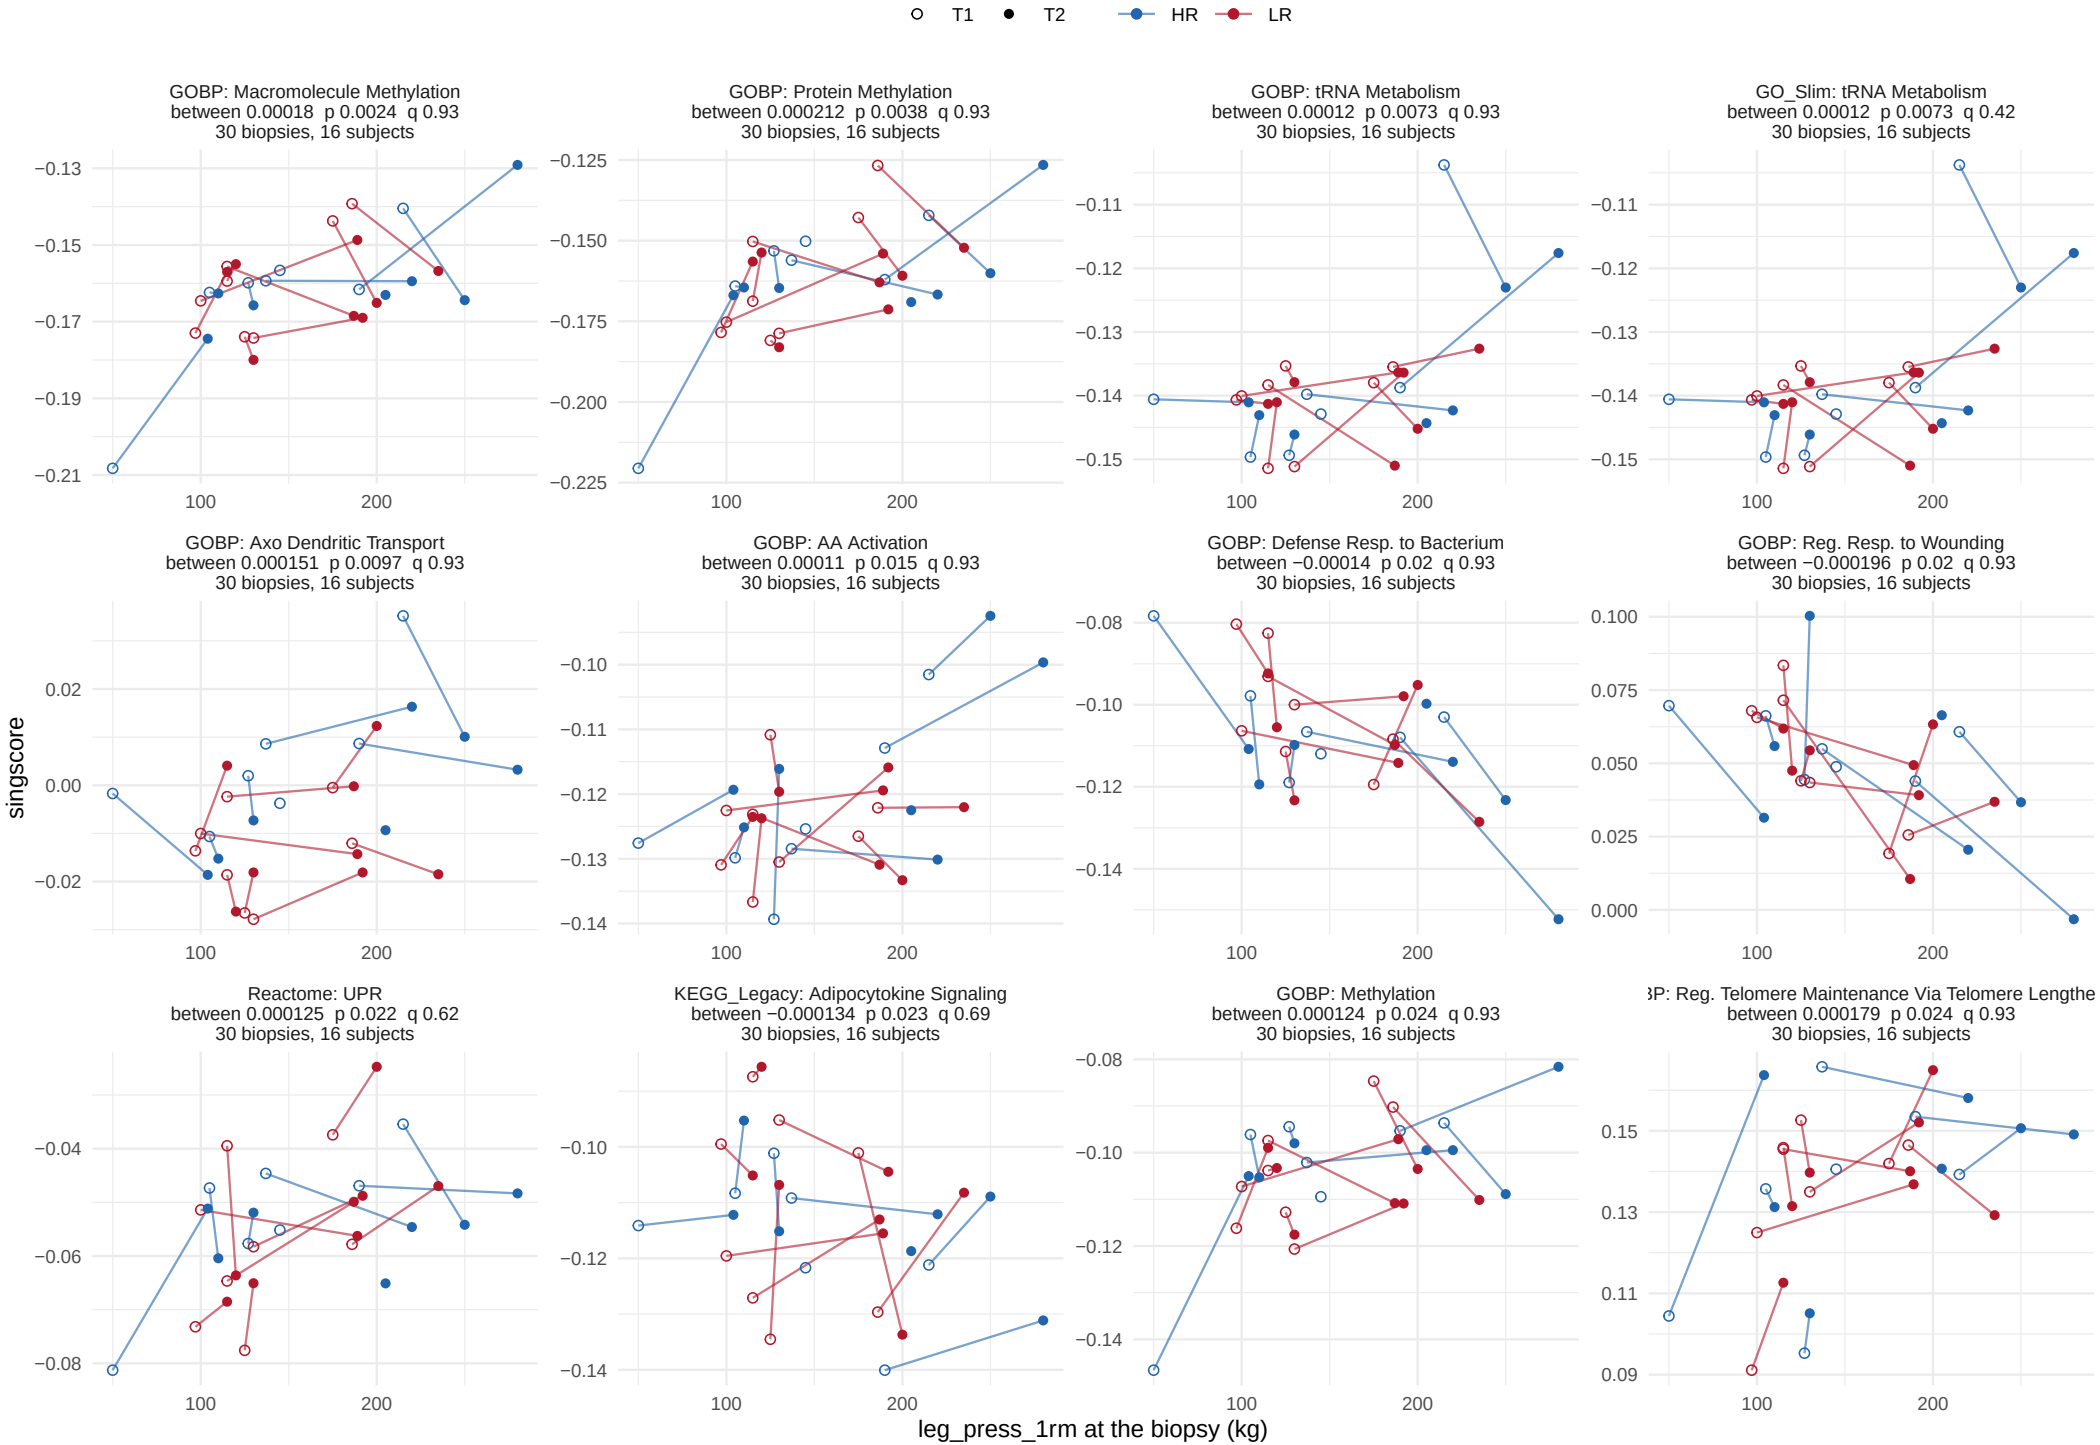


limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

## leg_press_1rm, between−person term


38 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 2 of 4.

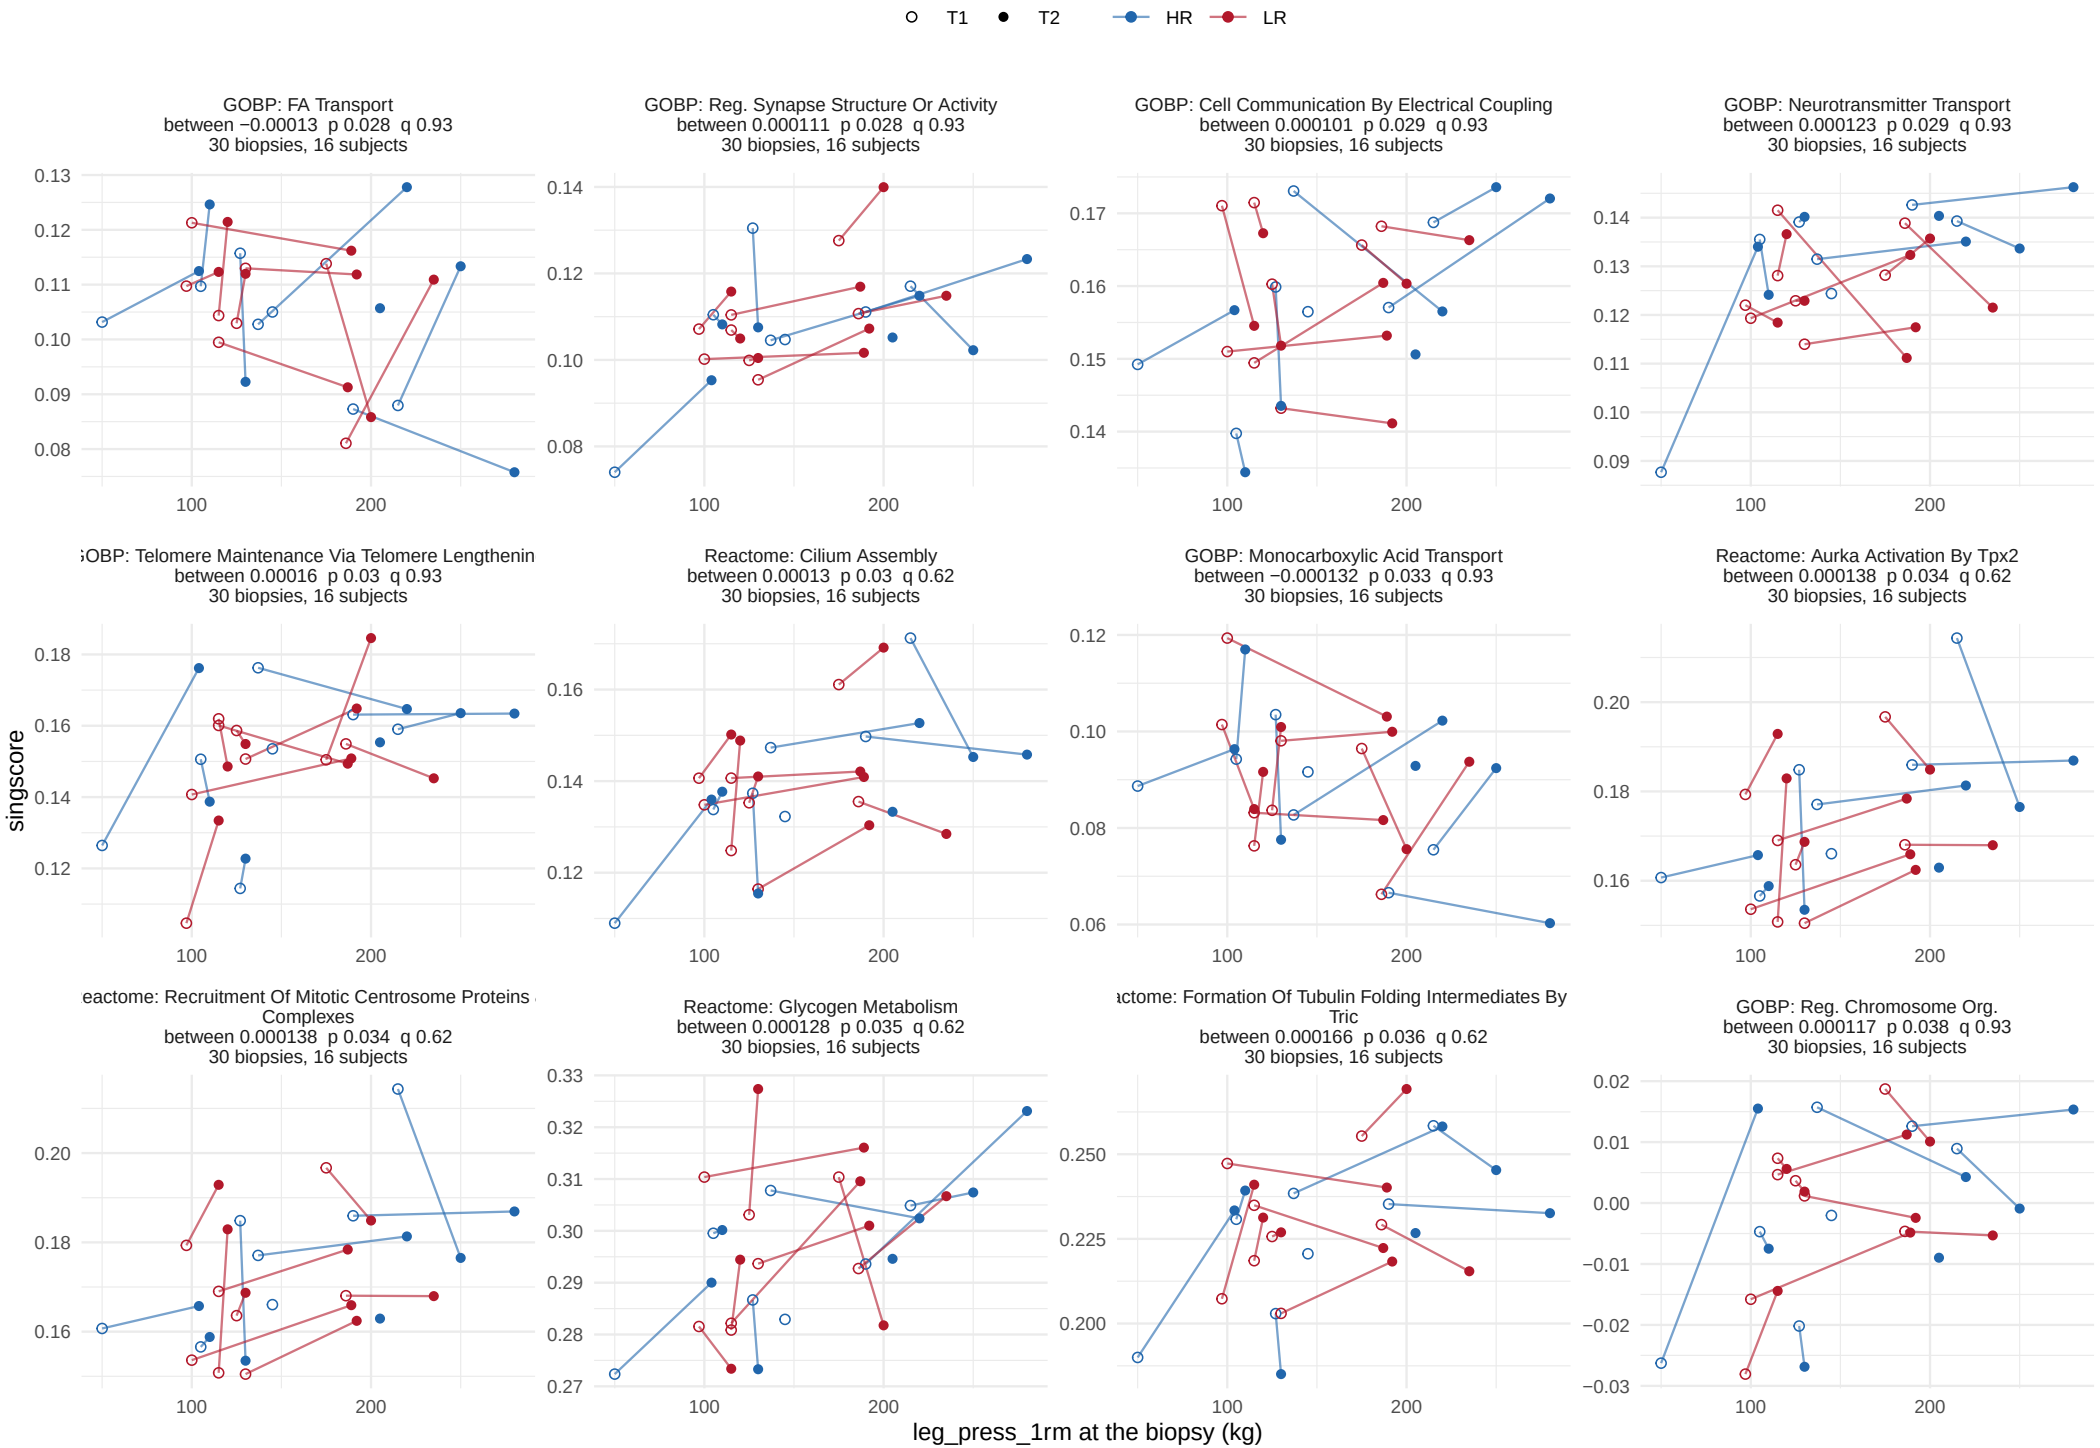


limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

# leg_press_1rm, between−person term


38 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 3 of 4.

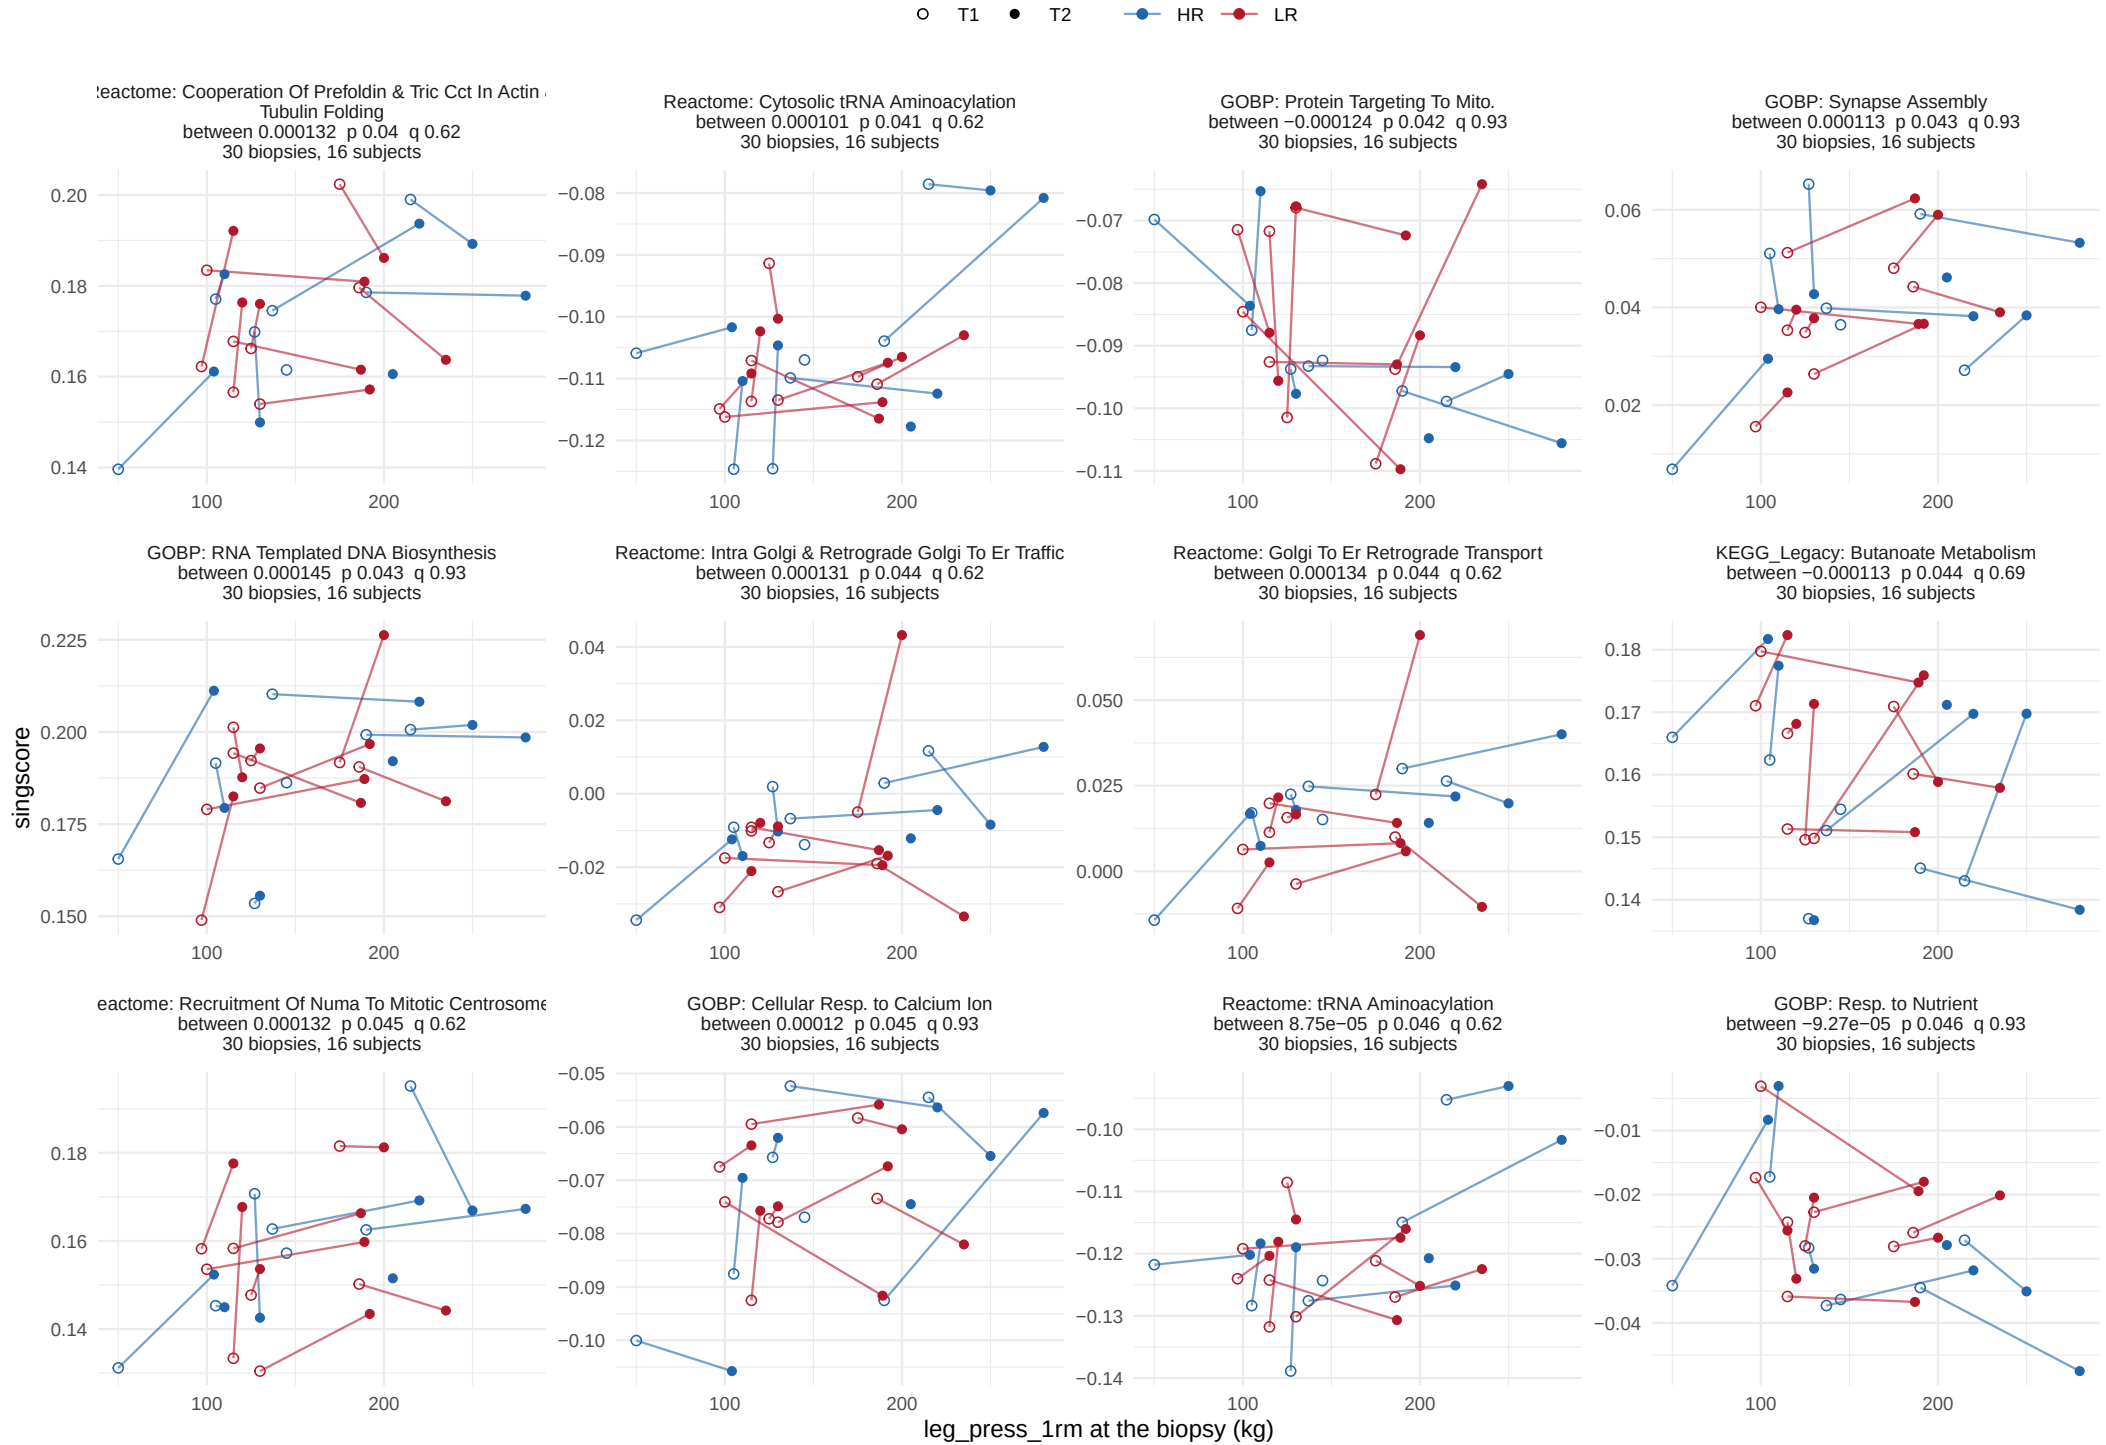


limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

## leg_press_1rm, between−person term


38 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 4 of 4.

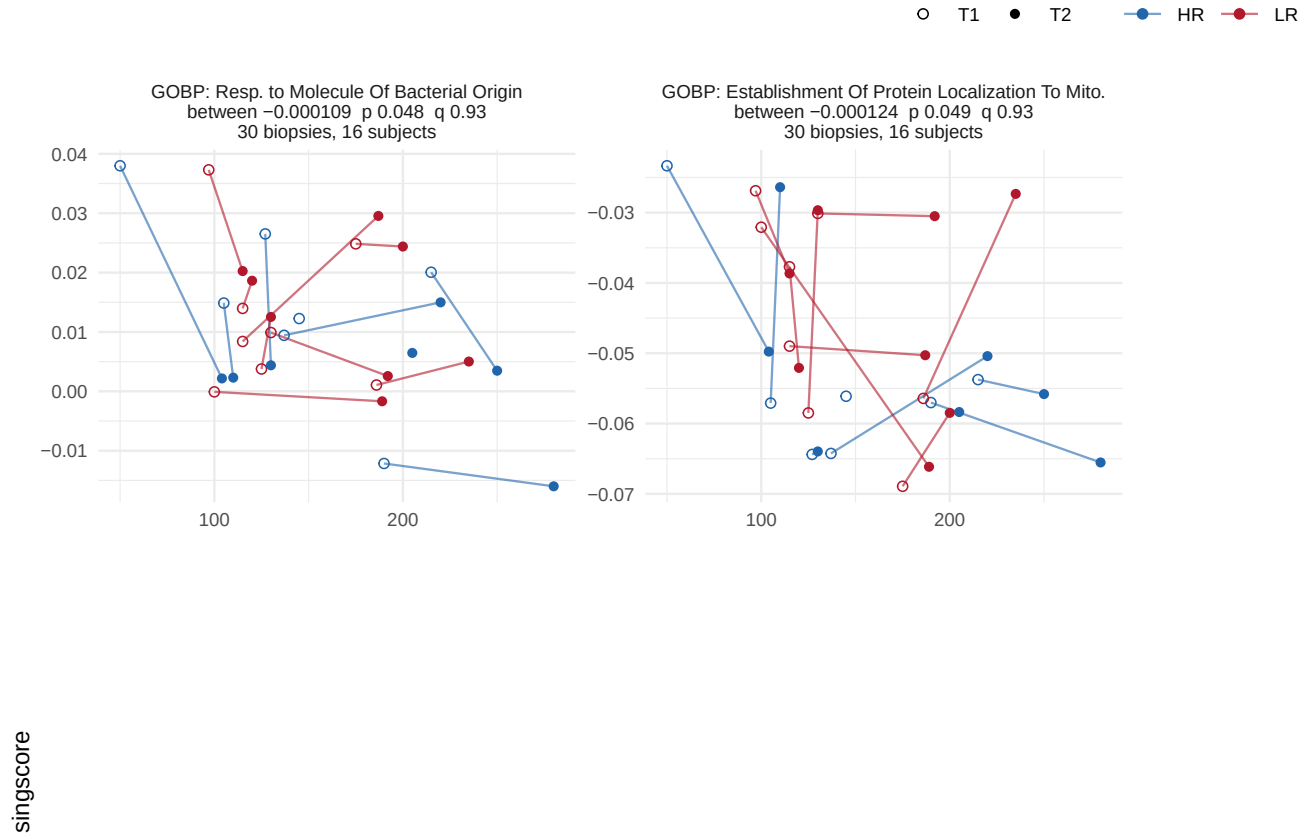


limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

## leg_ext_1rm, within−person term


94 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 1 of 8.

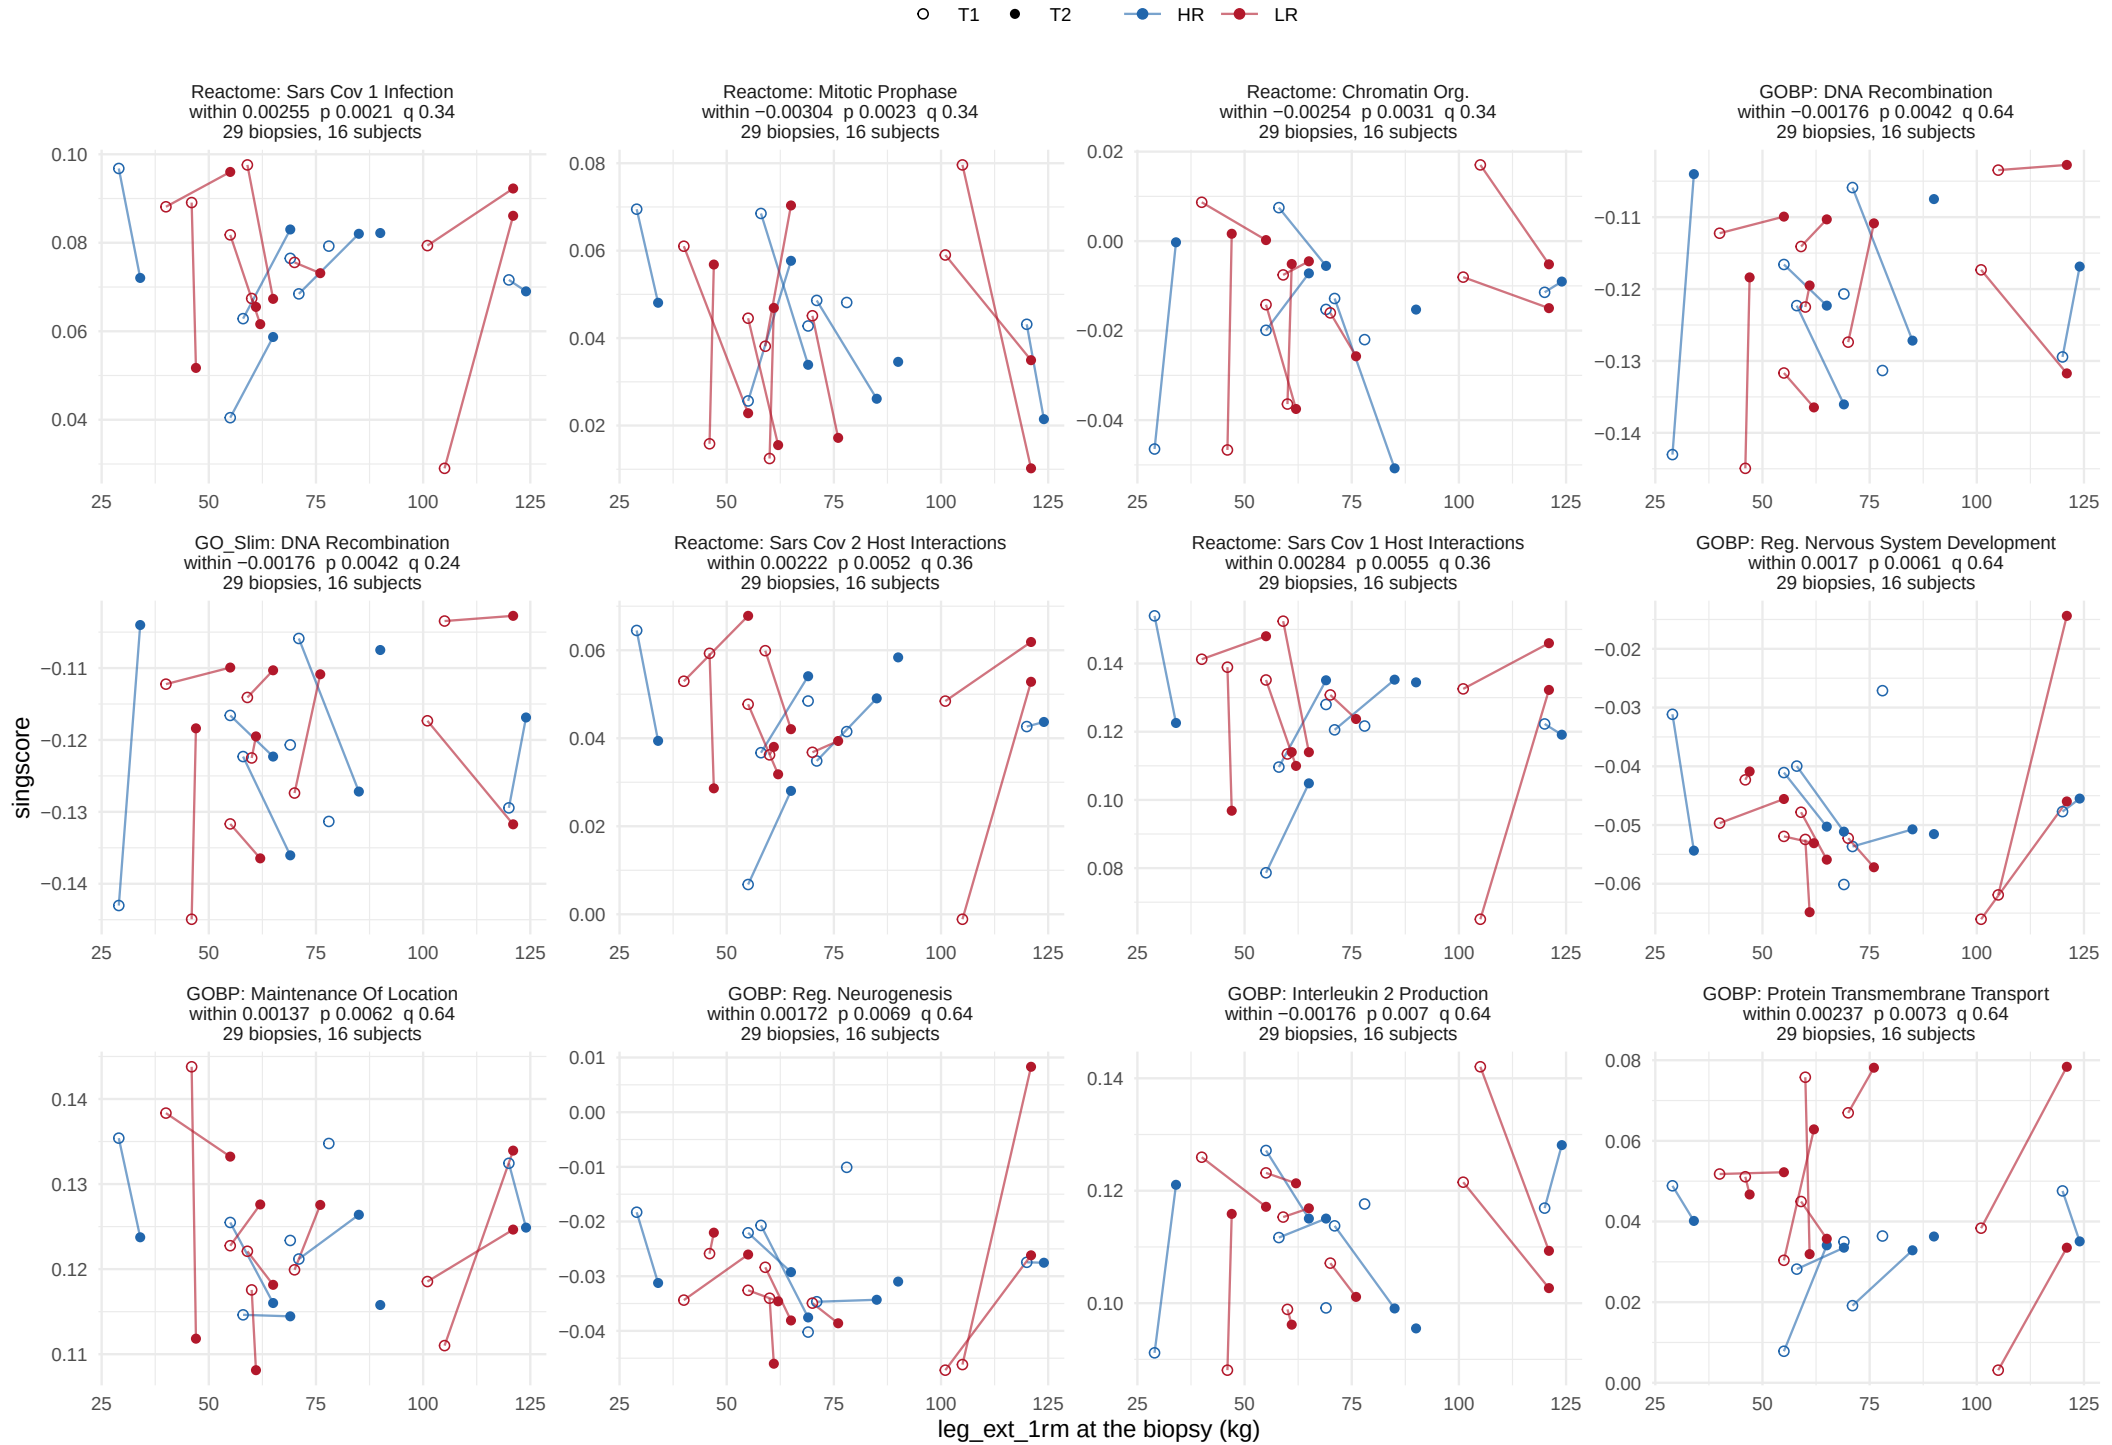


limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

# leg_ext_1rm, within−person term


94 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 2 of 8.

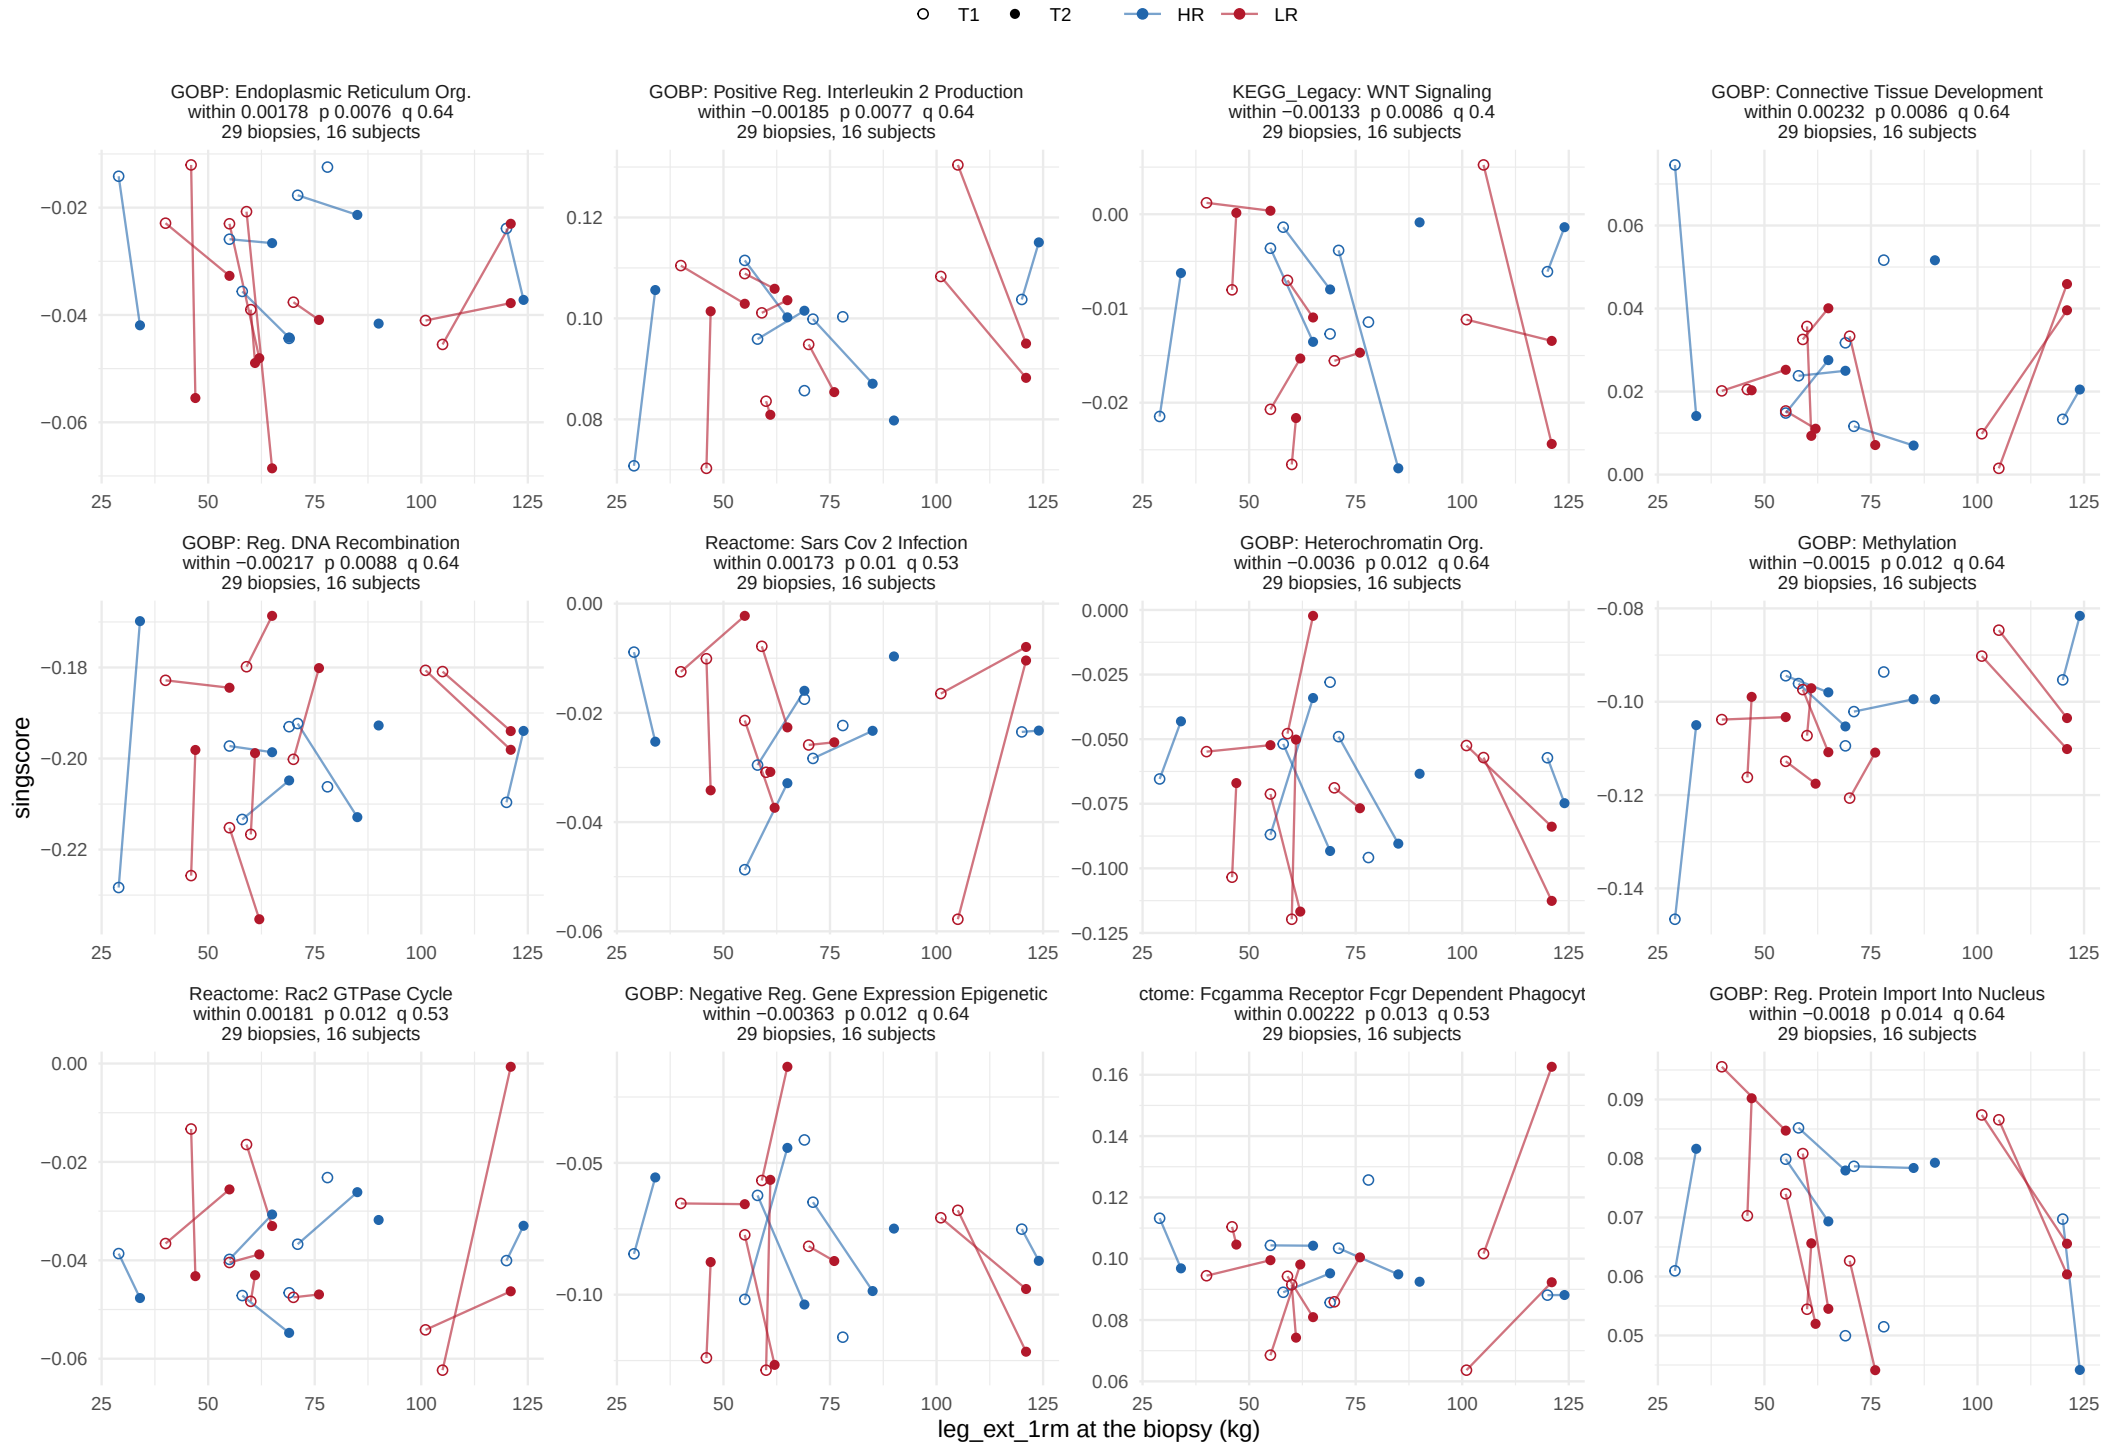


limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

## leg_ext_1rm, within−person term


94 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 3 of 8.

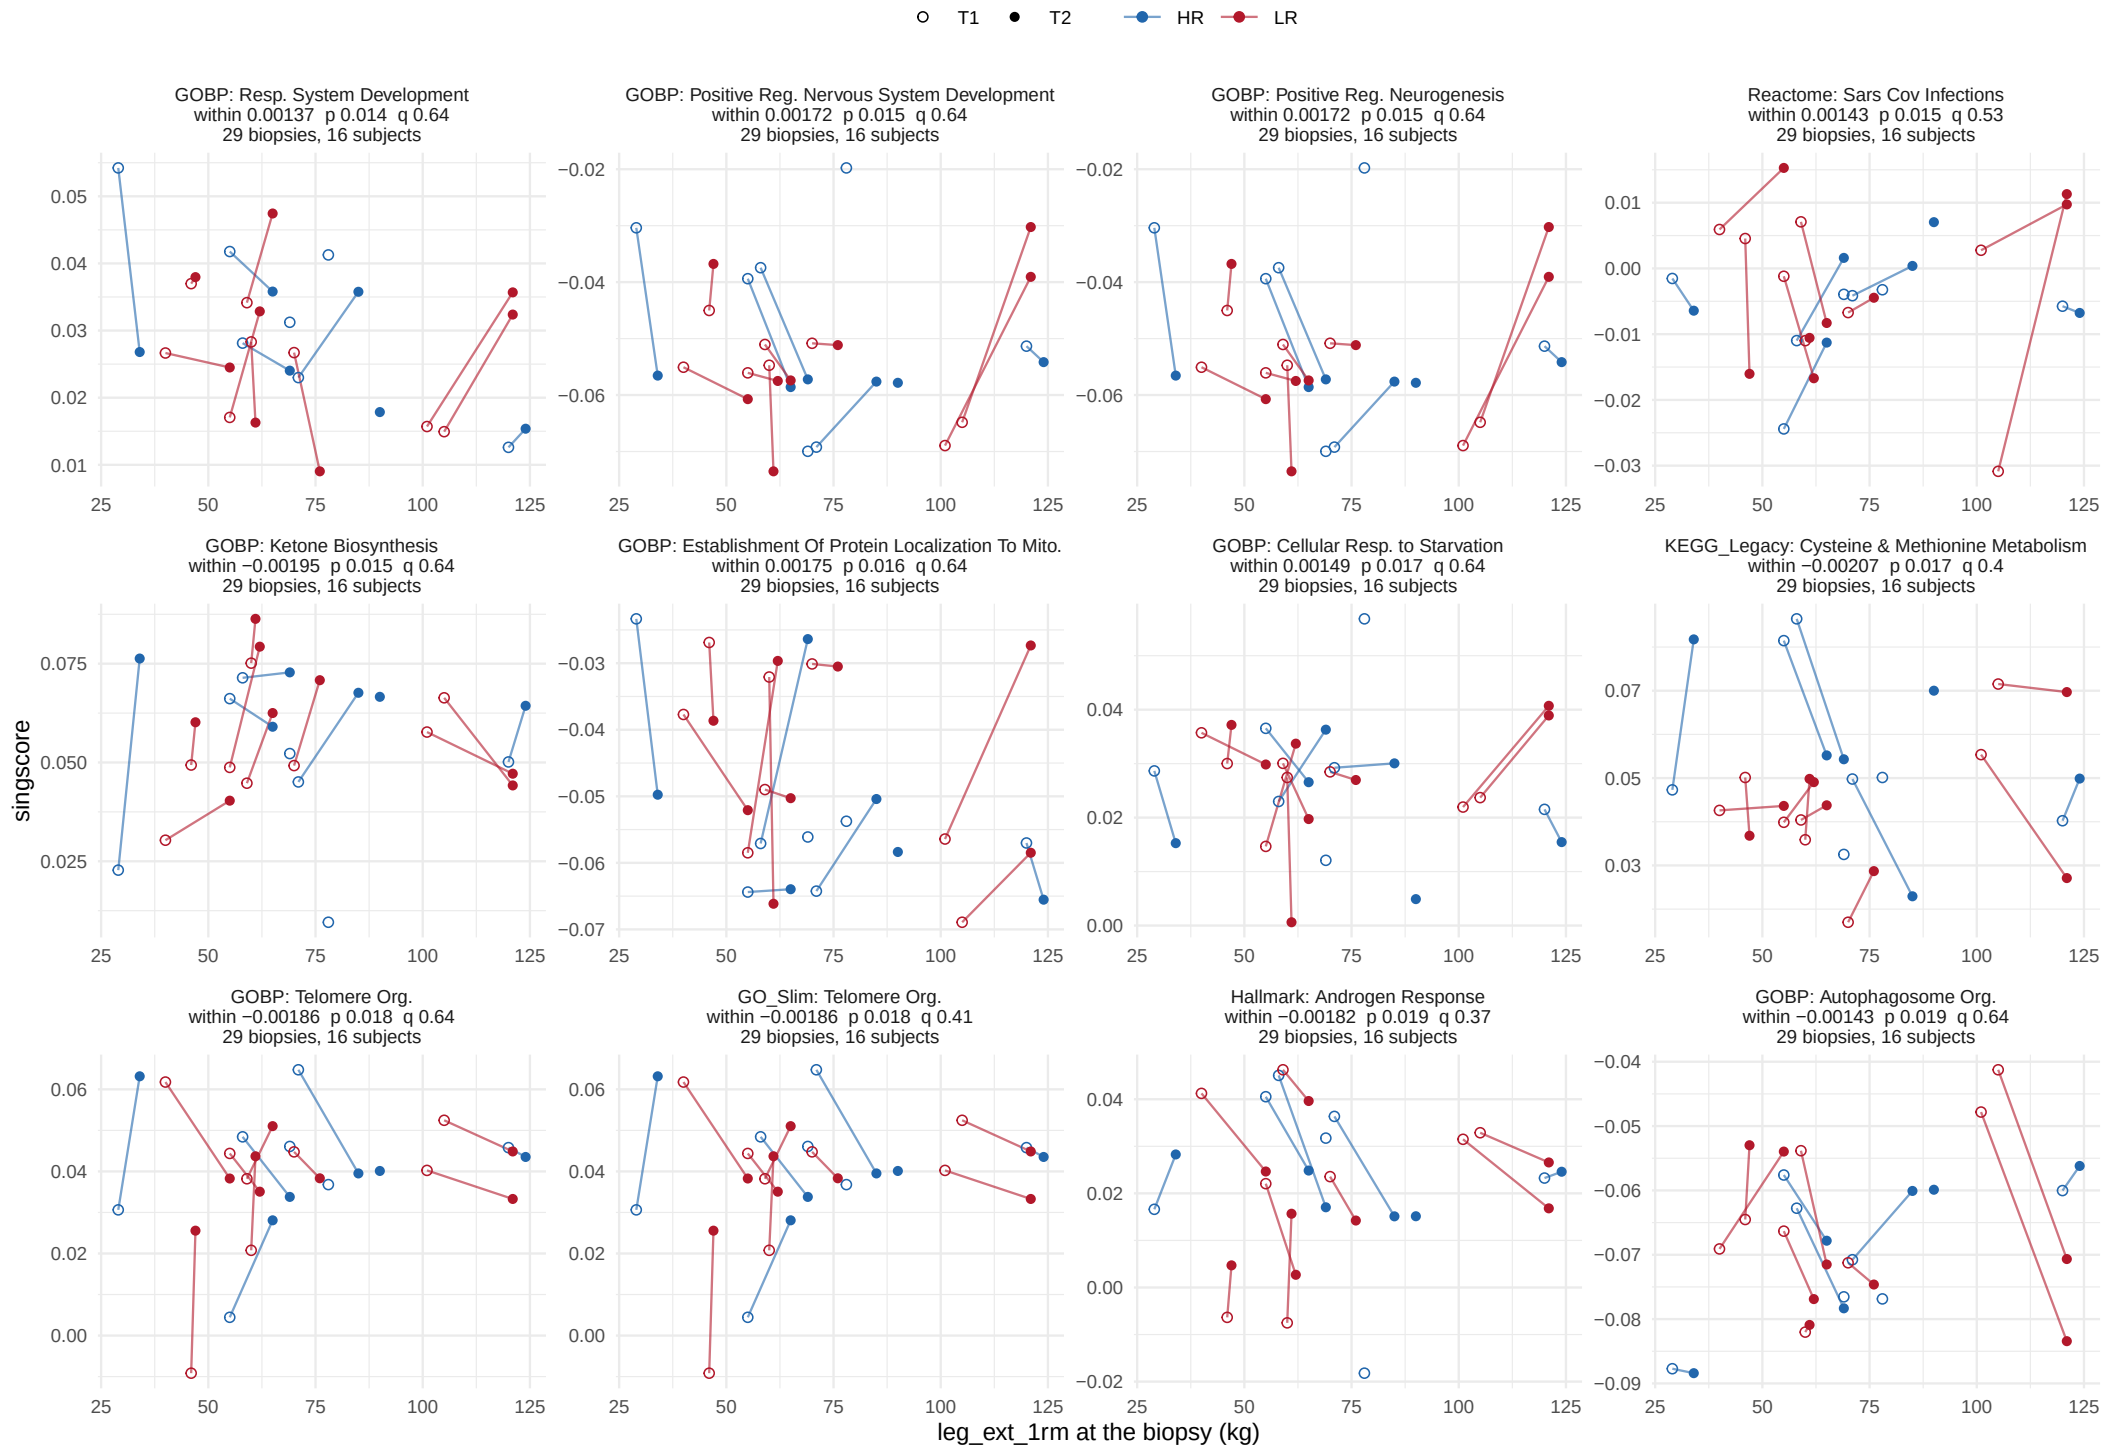


limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

## leg_ext_1rm, within−person term


94 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 4 of 8.

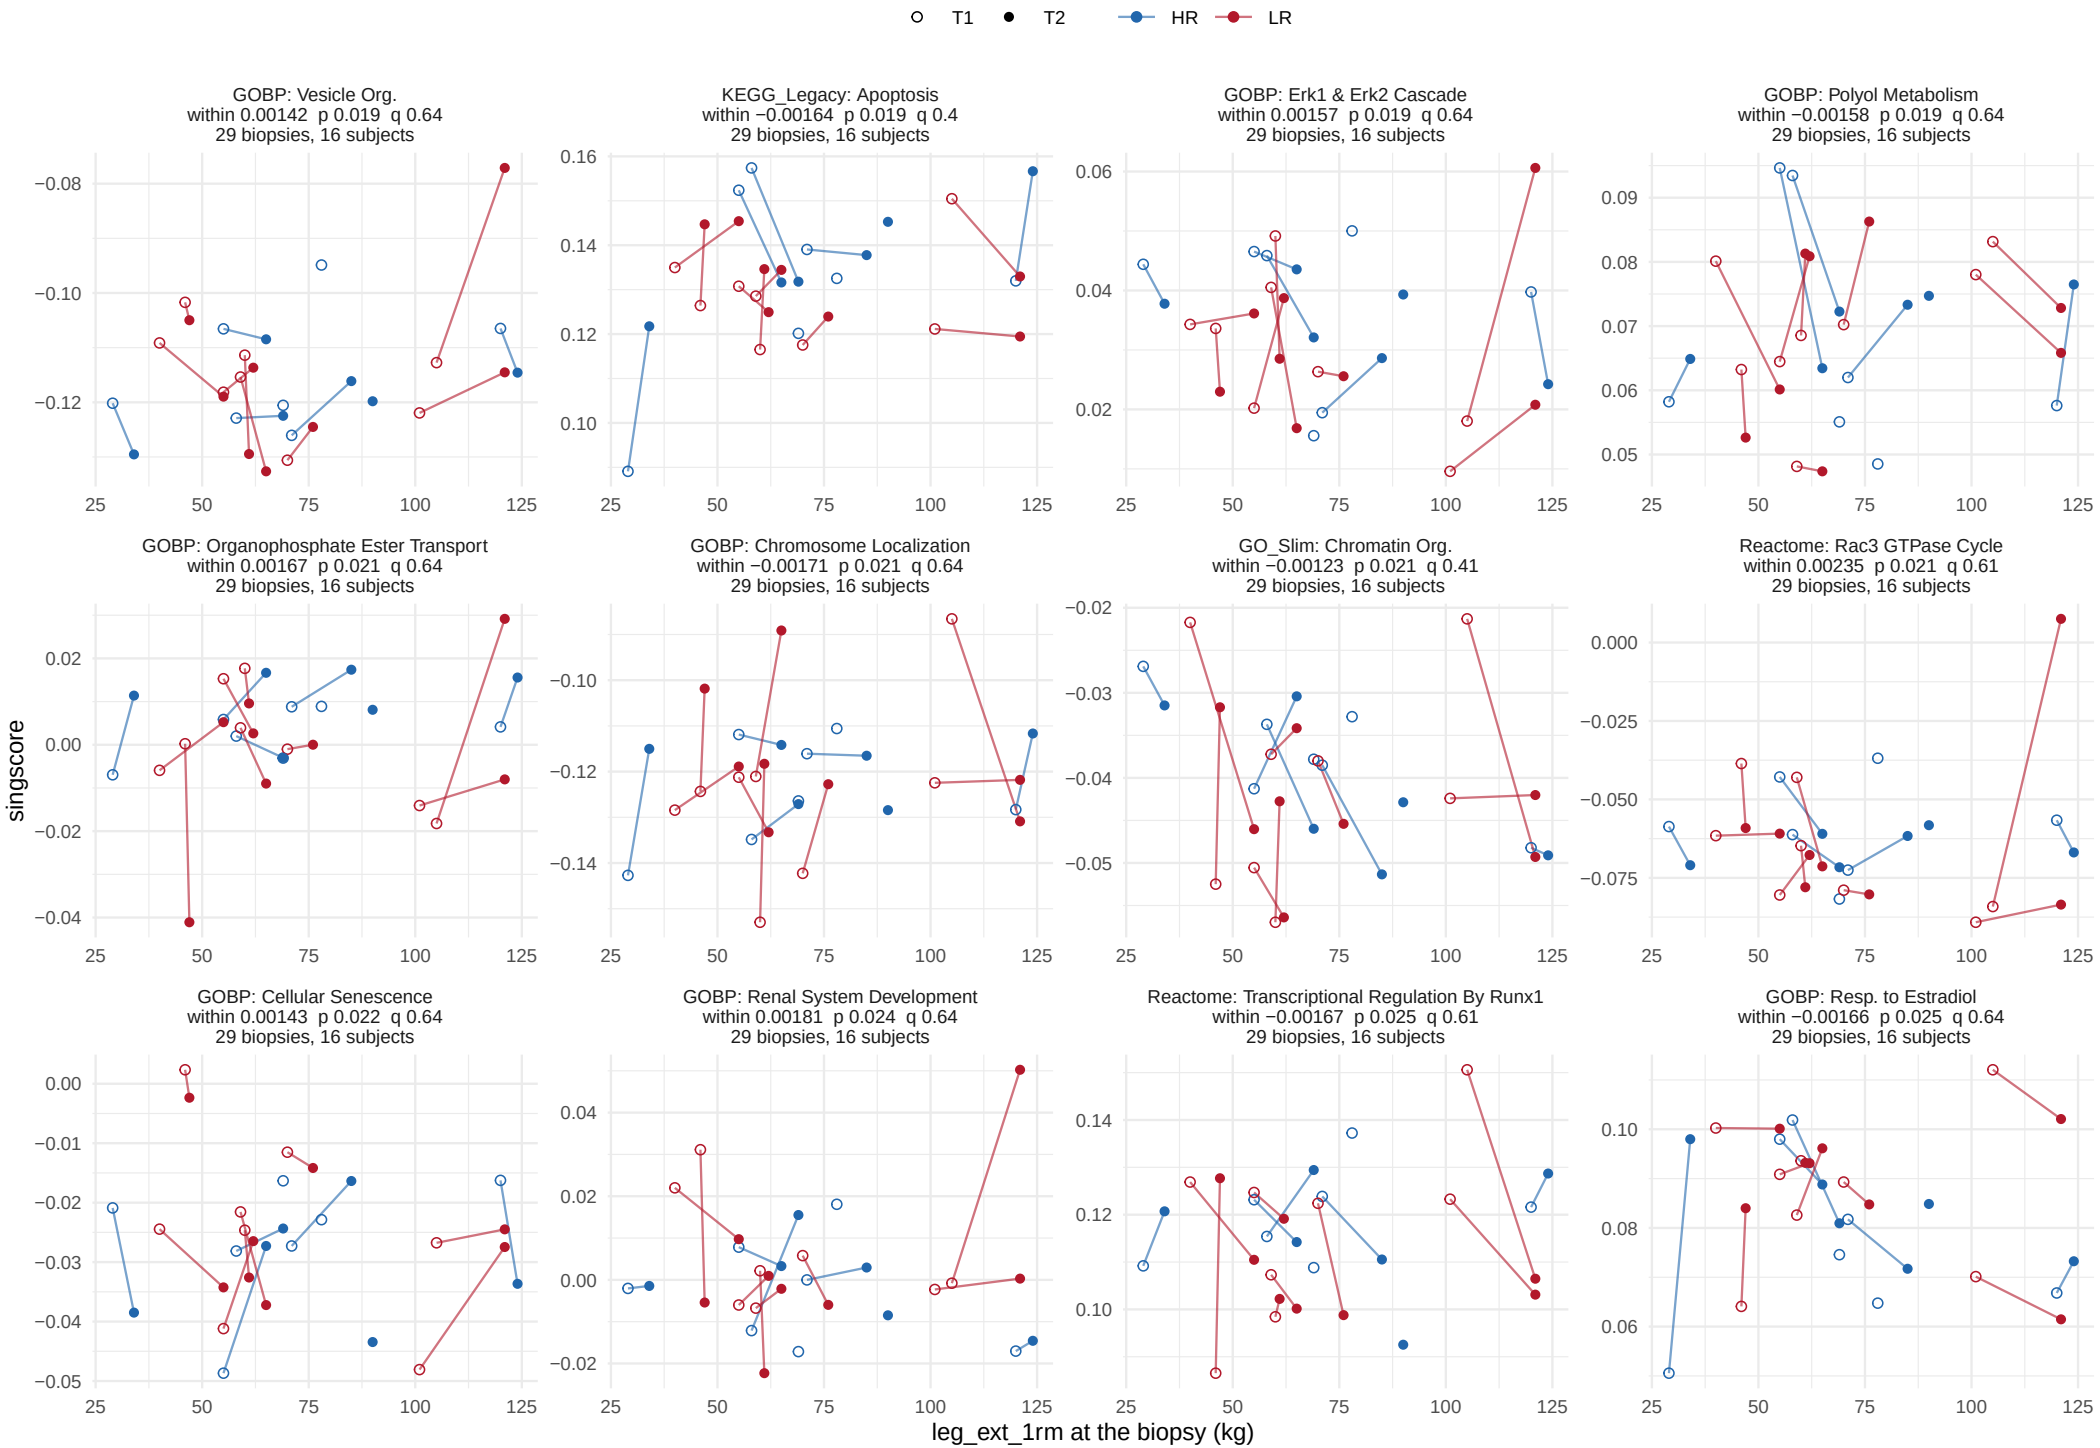


limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

## leg_ext_1rm, within−person term


94 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 5 of 8.

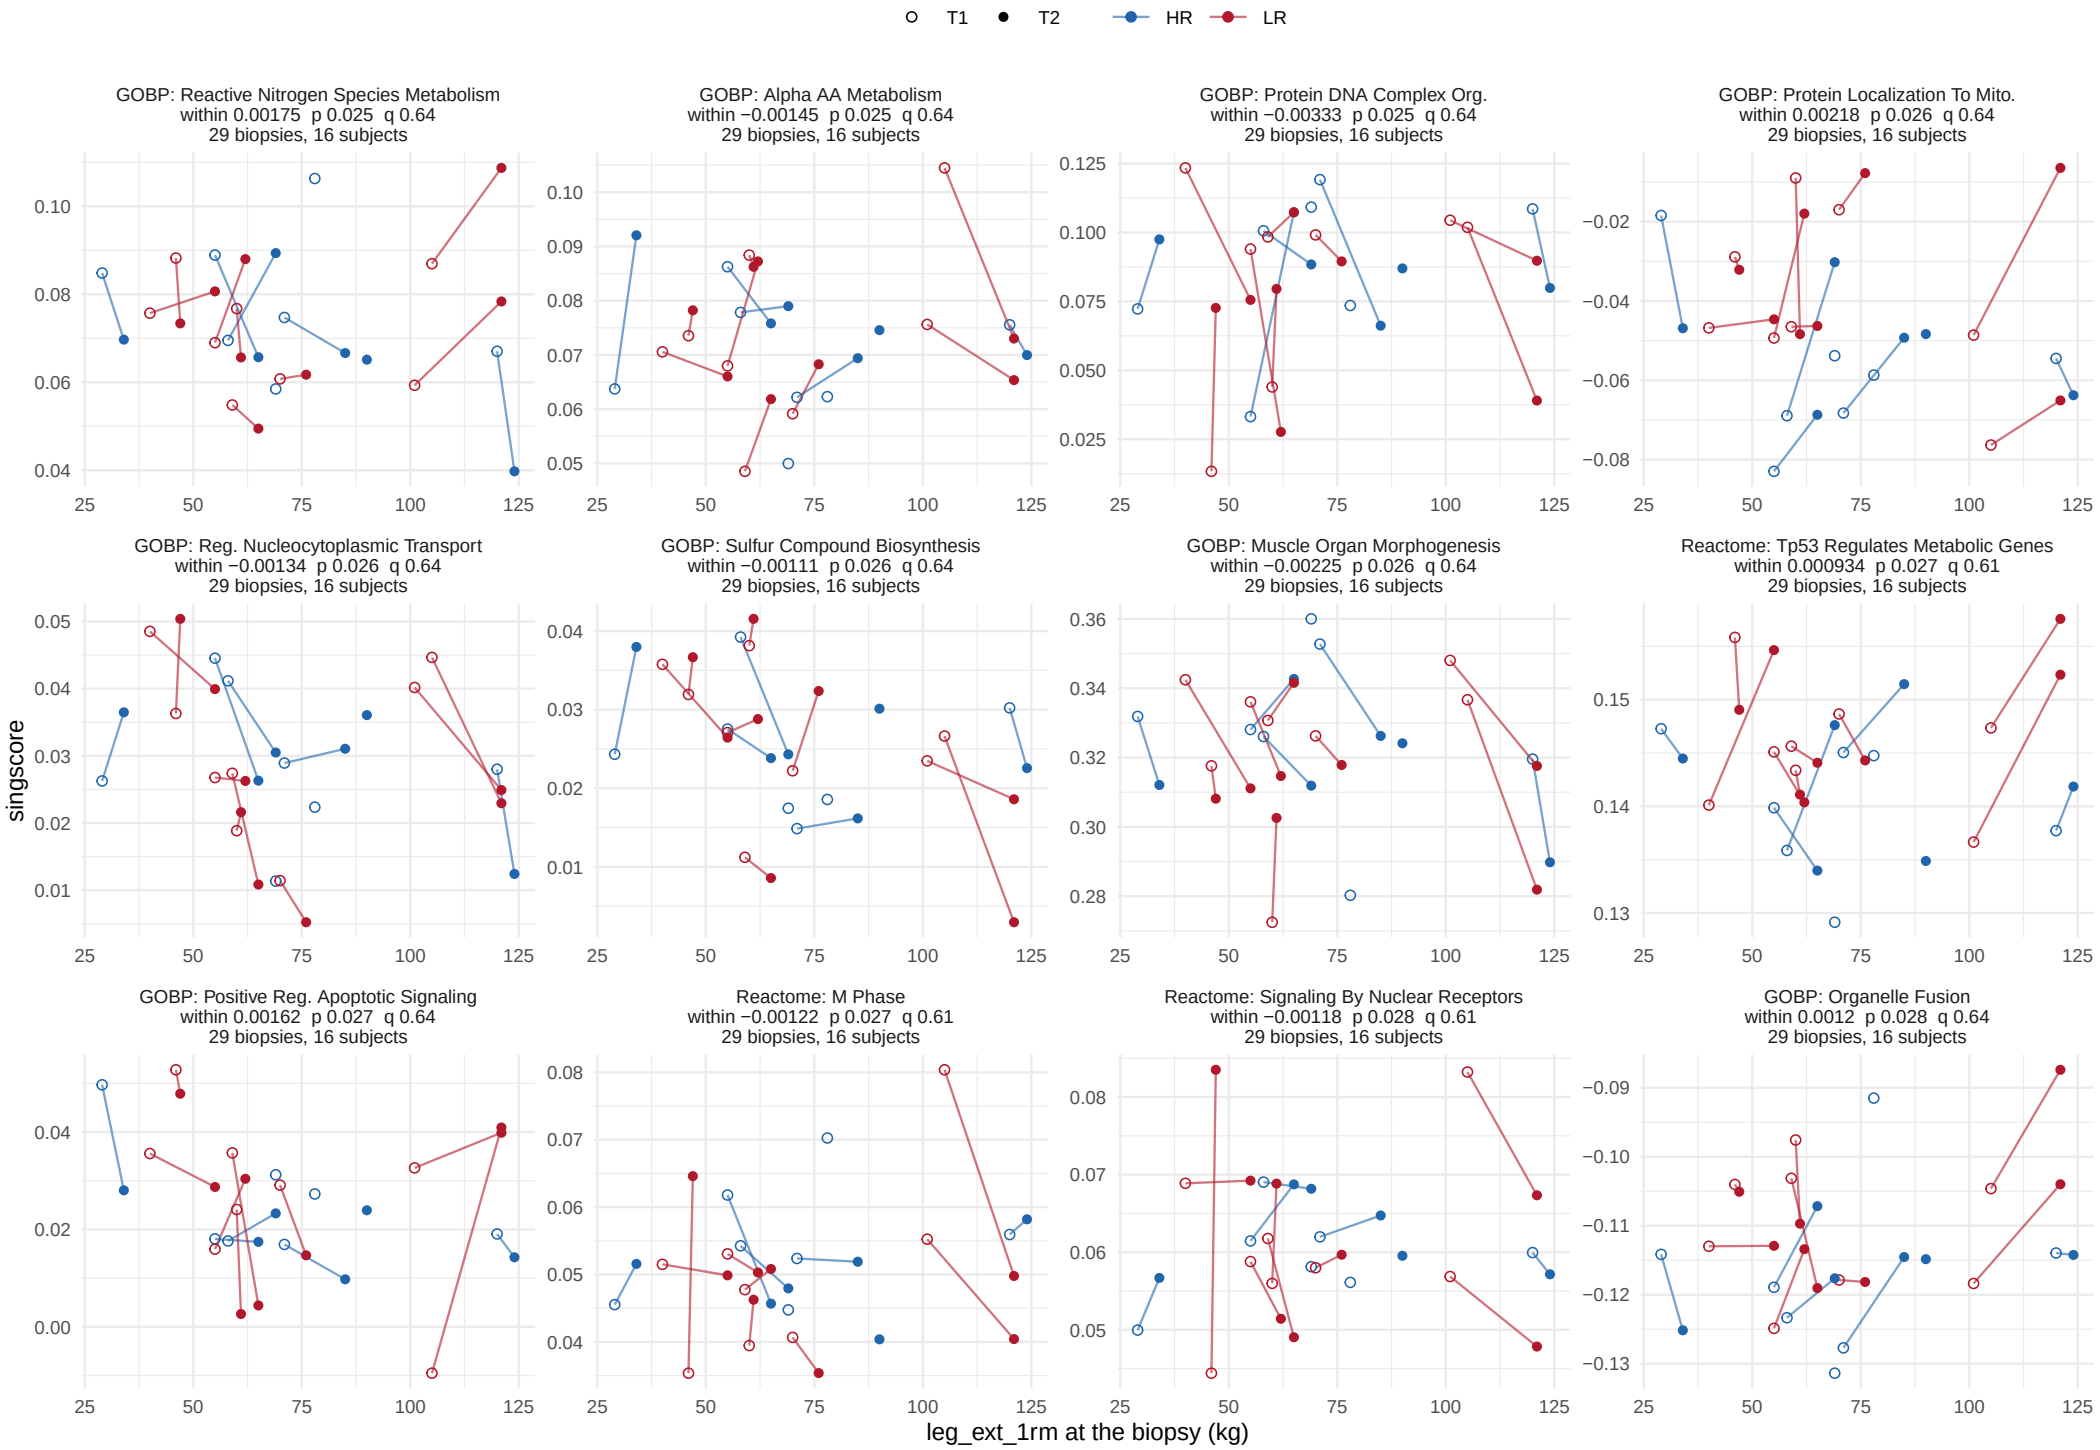


limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

## leg_ext_1rm, within−person term


94 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 6 of 8.

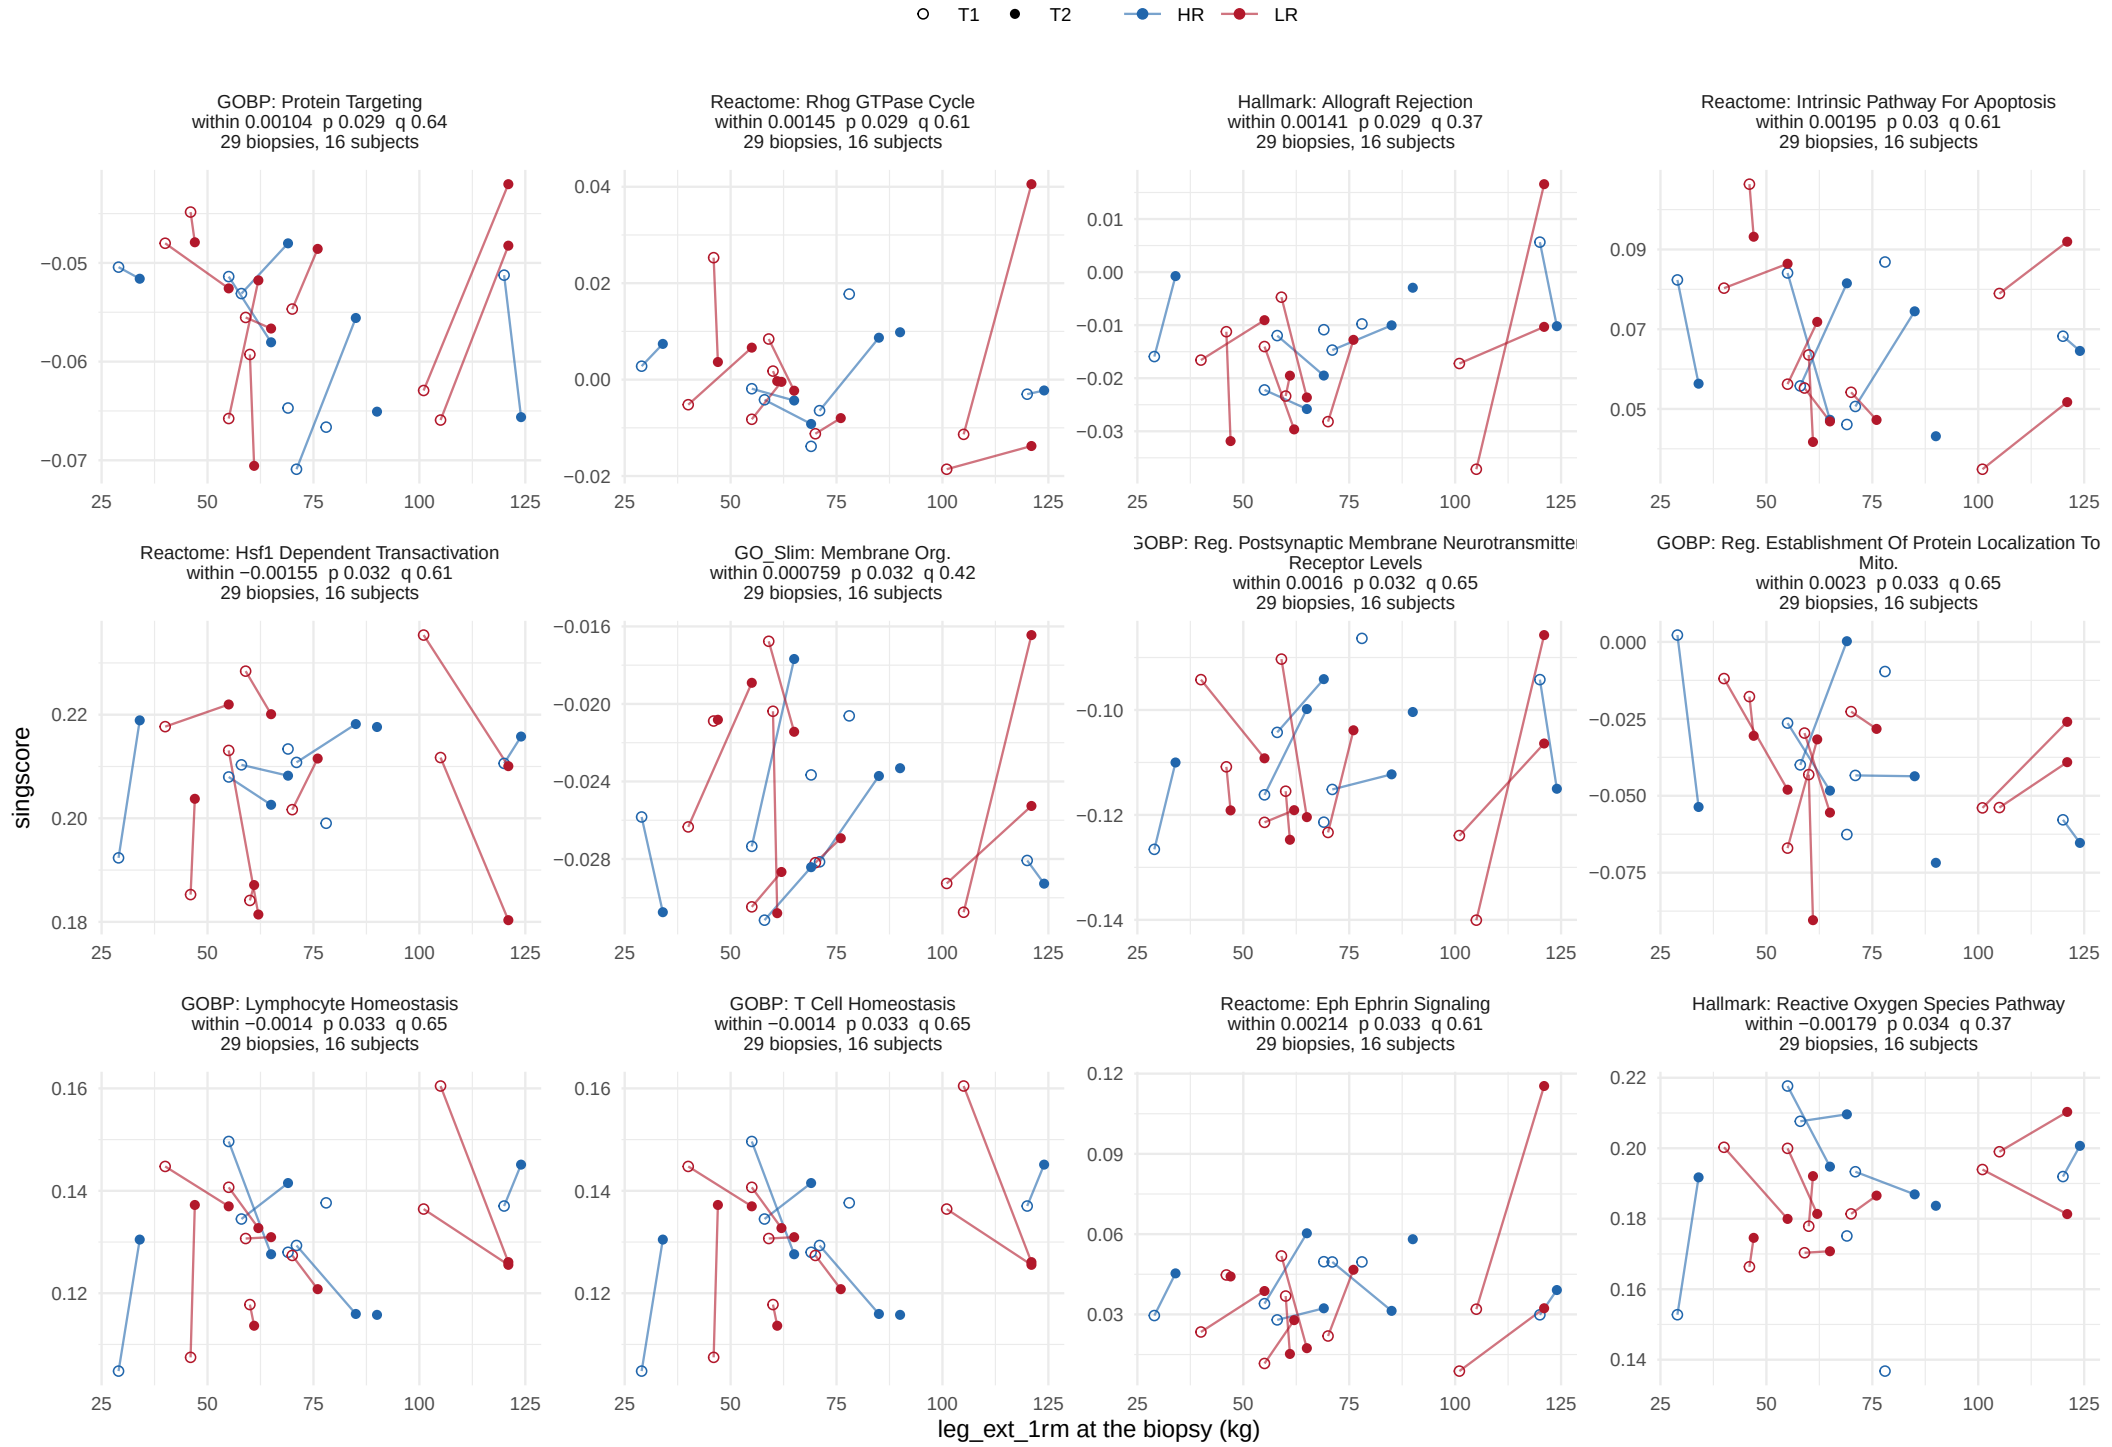


limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

## leg_ext_1rm, within−person term


94 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 7 of 8.

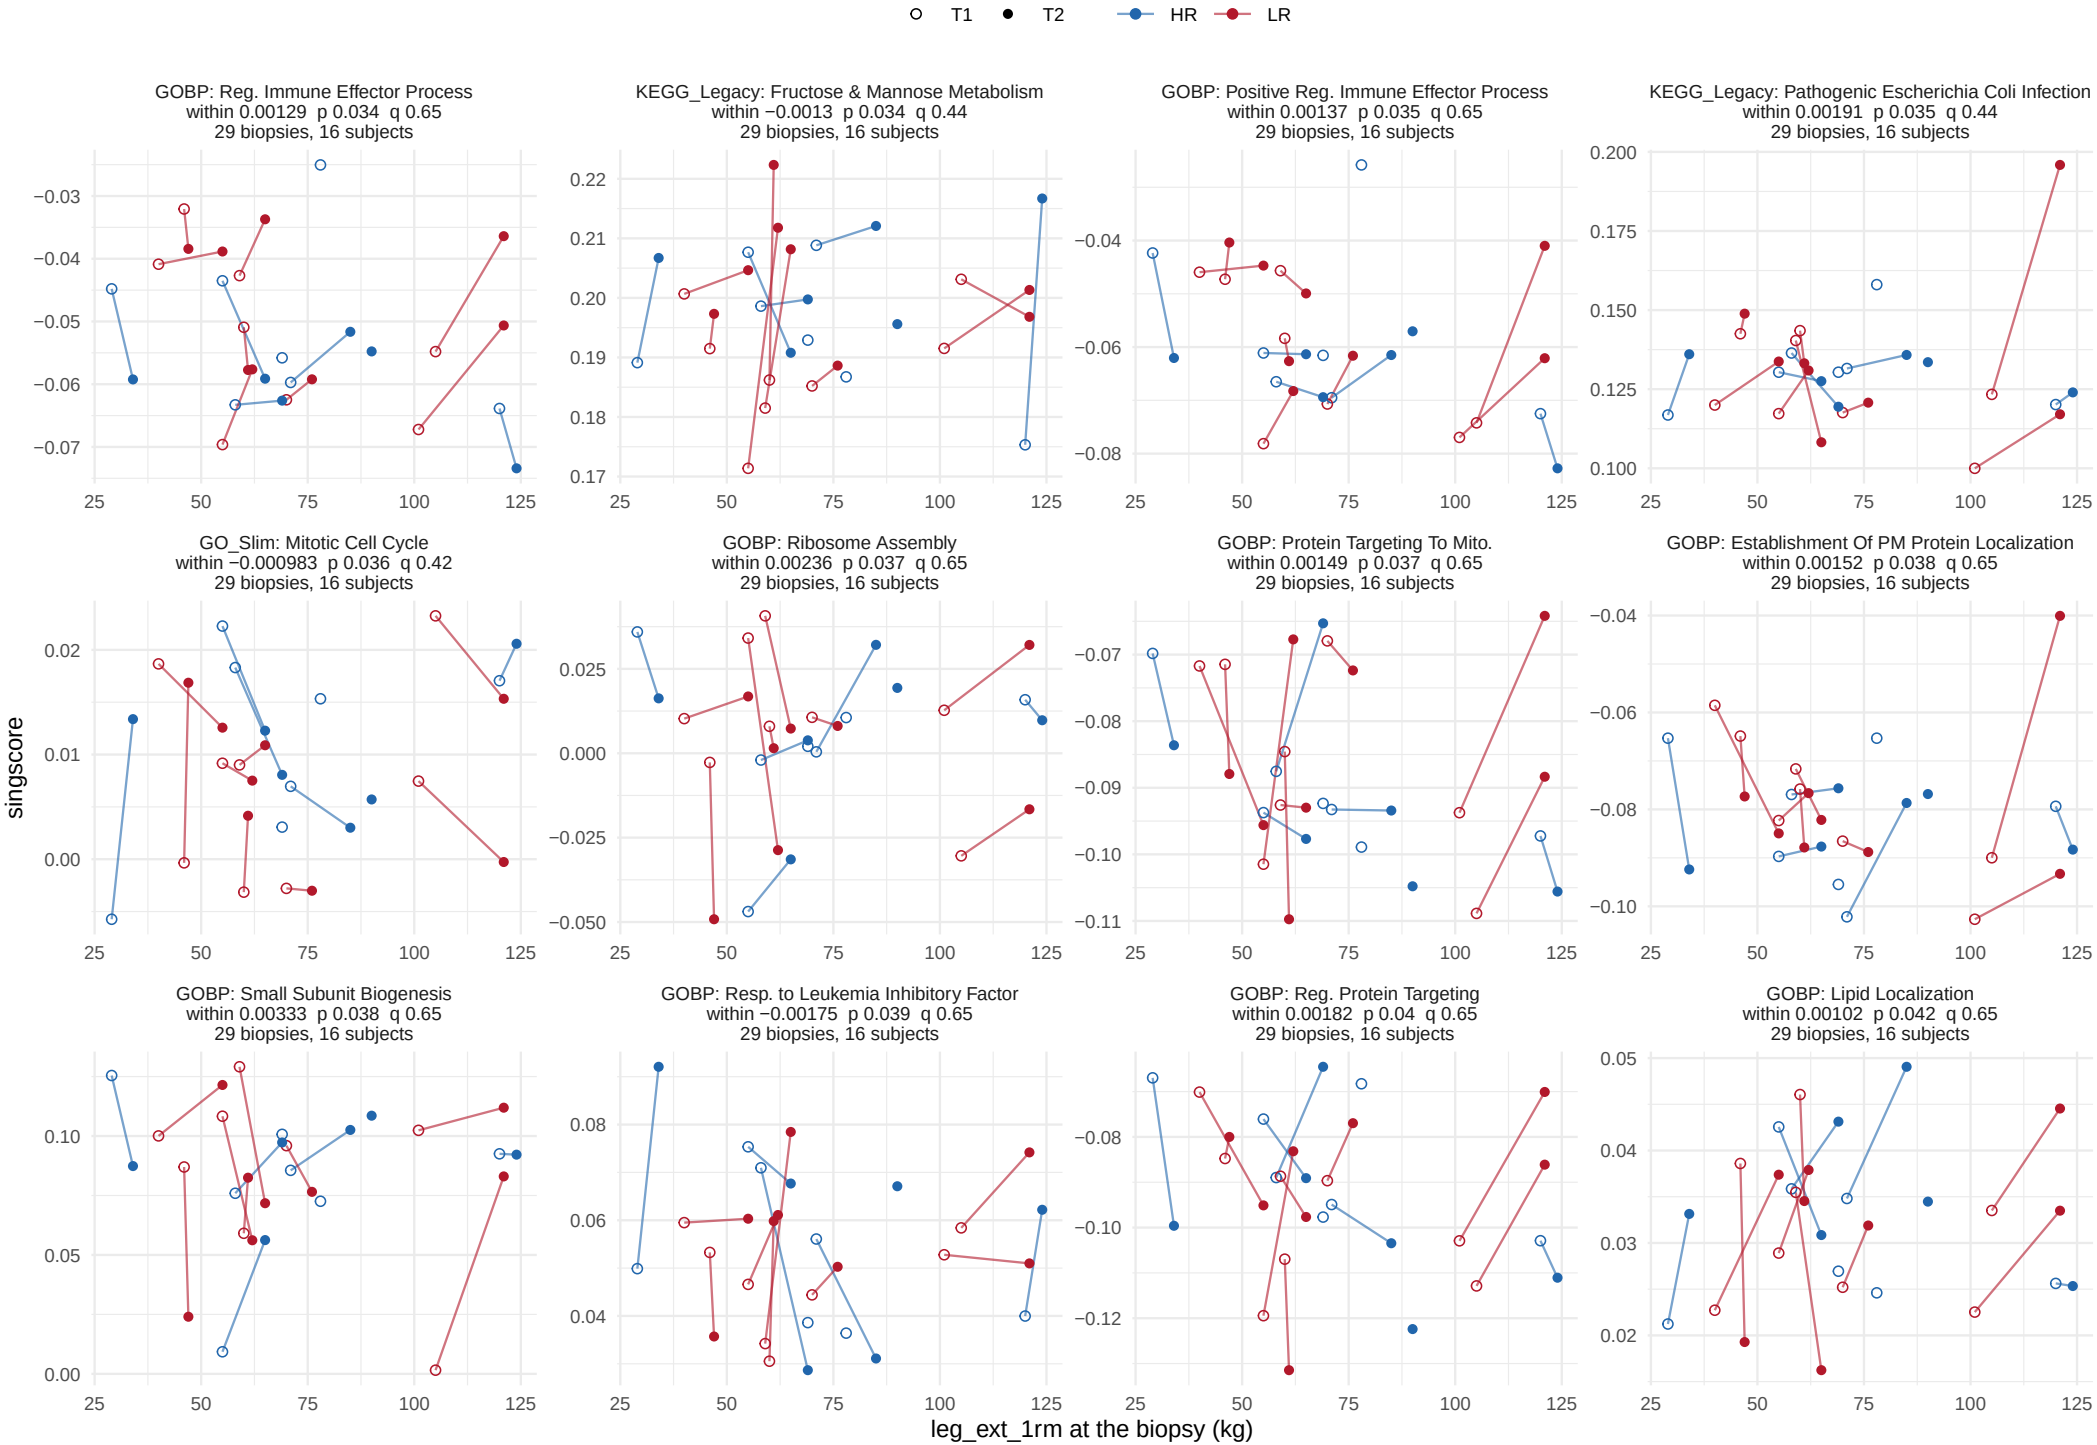


limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

# leg_ext_1rm, within−person term


94 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 8 of 8.

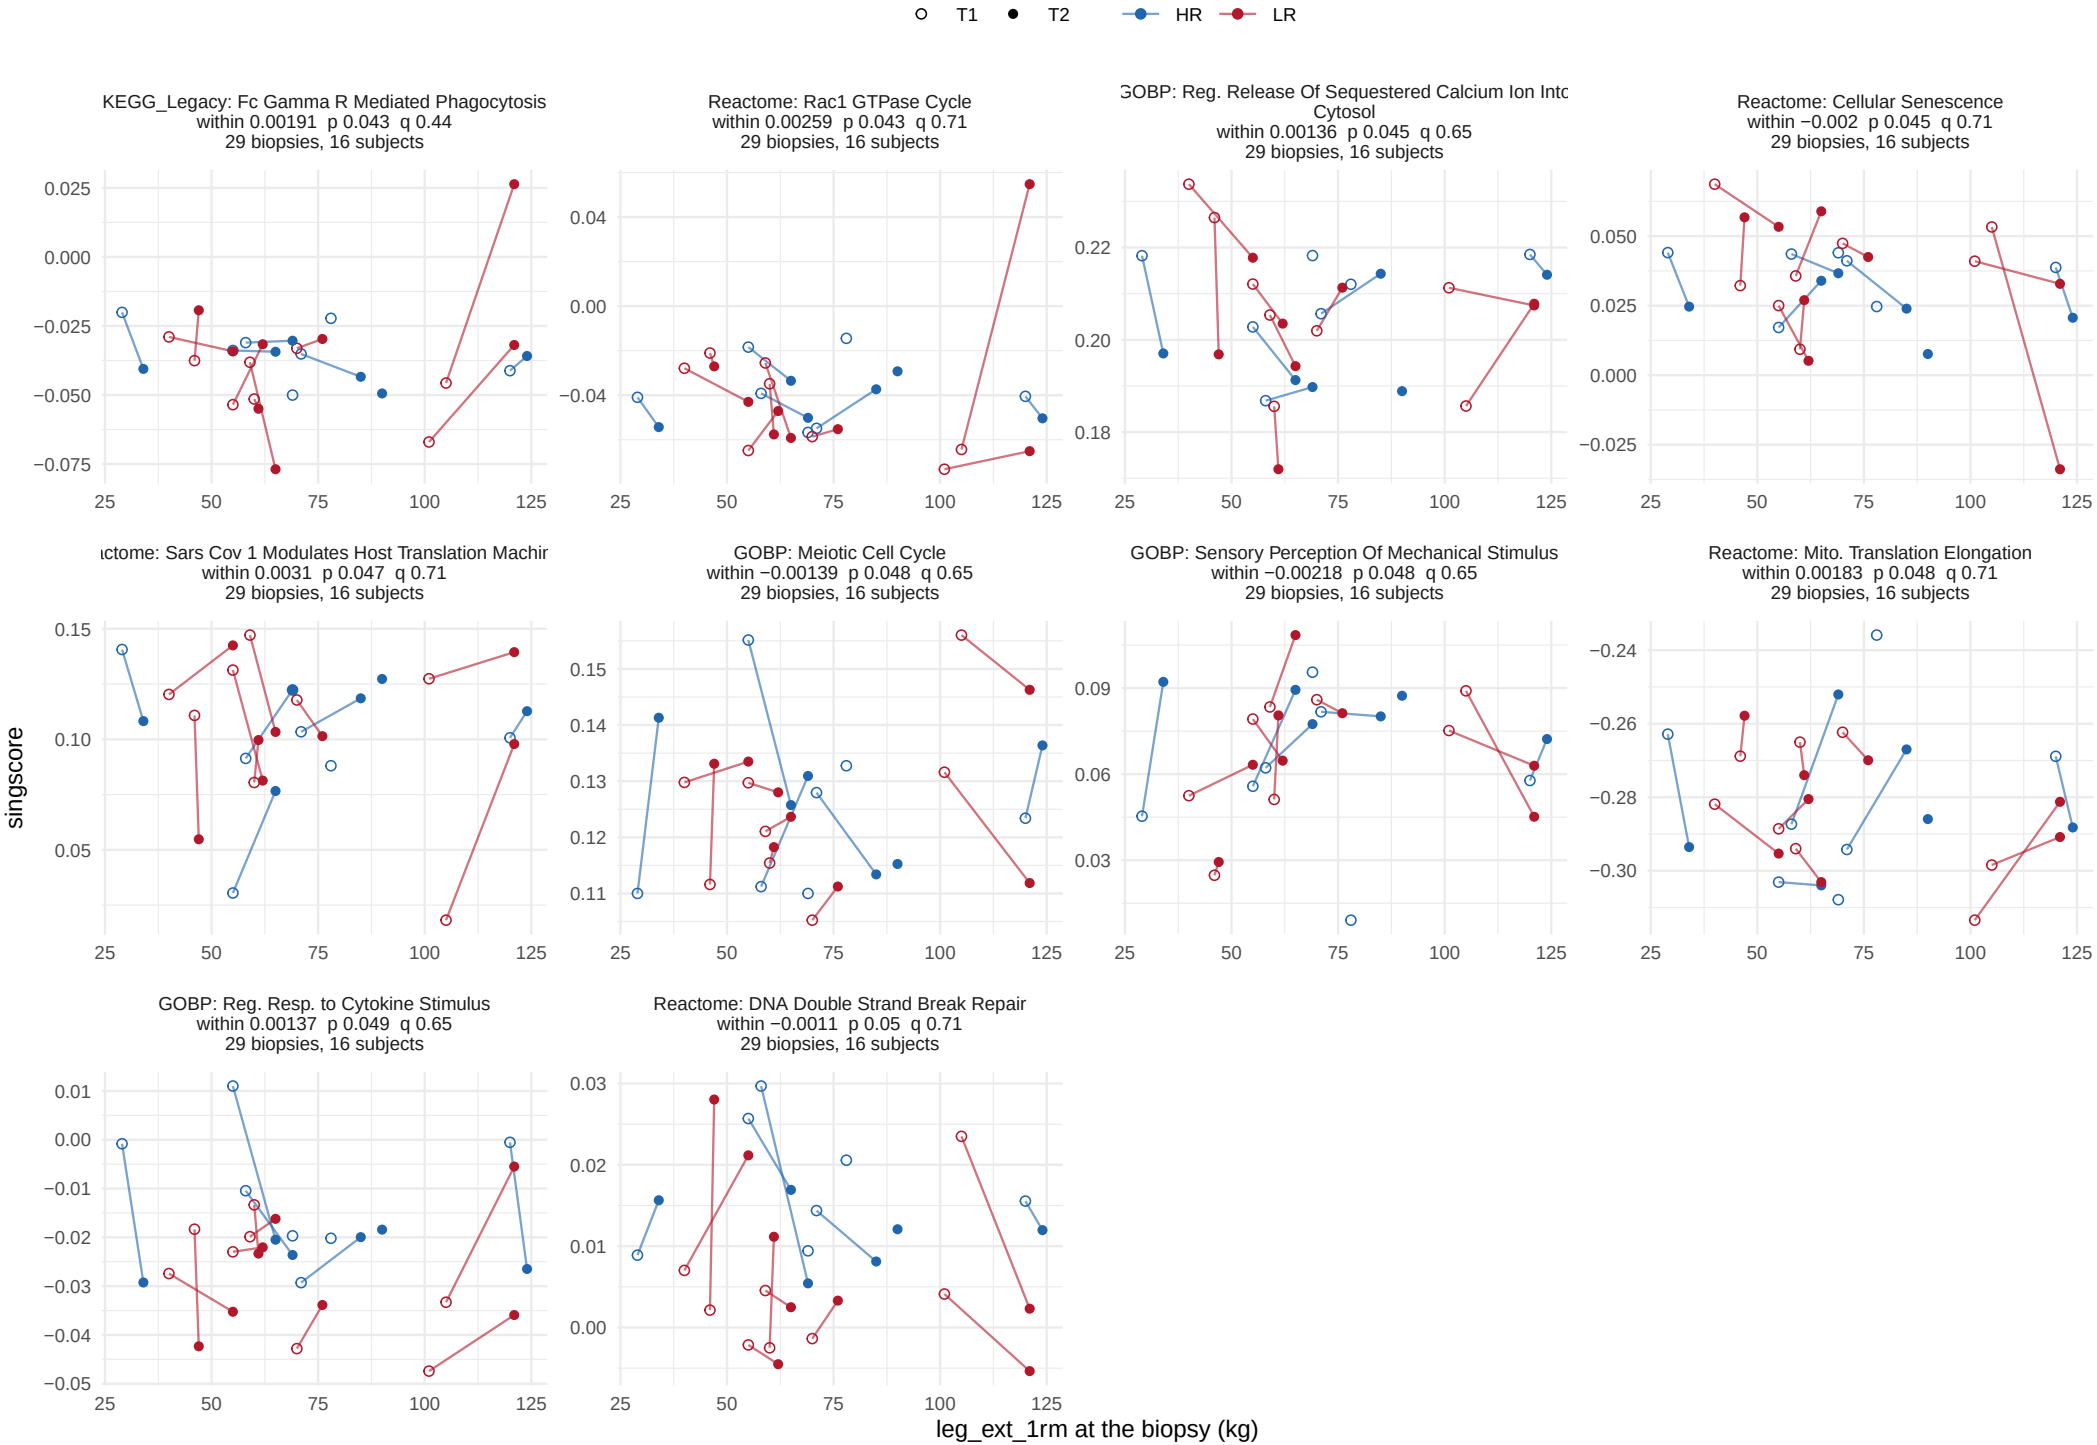


limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

# leg_ext_1rm, between−person term


34 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 1 of 3.

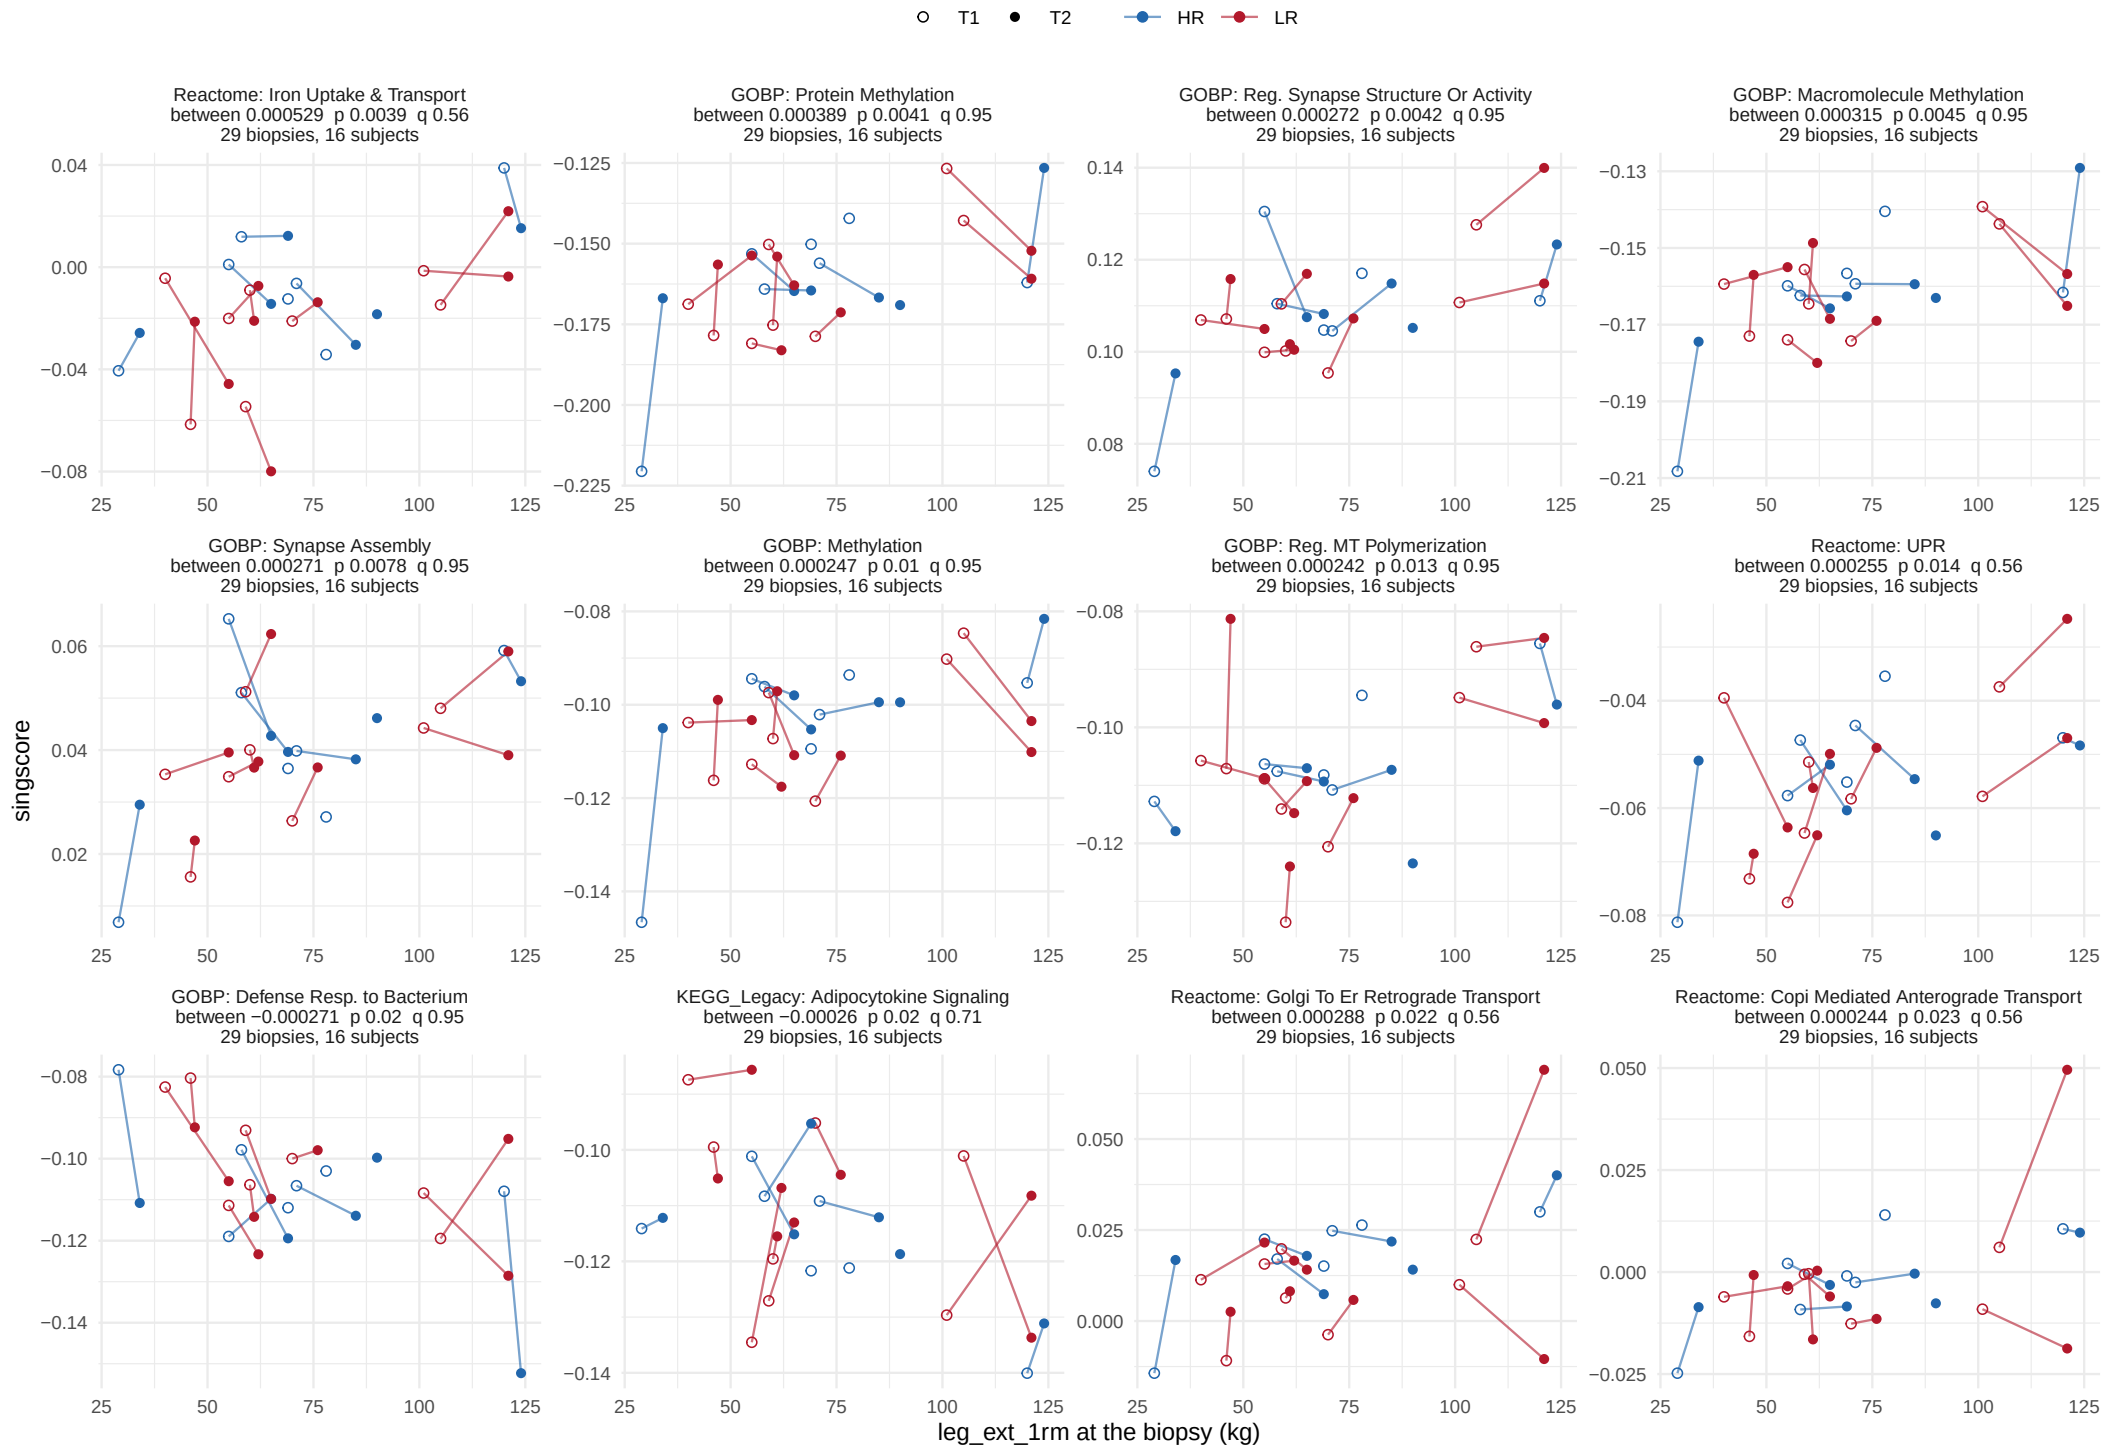


limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

## leg_ext_1rm, between−person term


34 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 2 of 3.

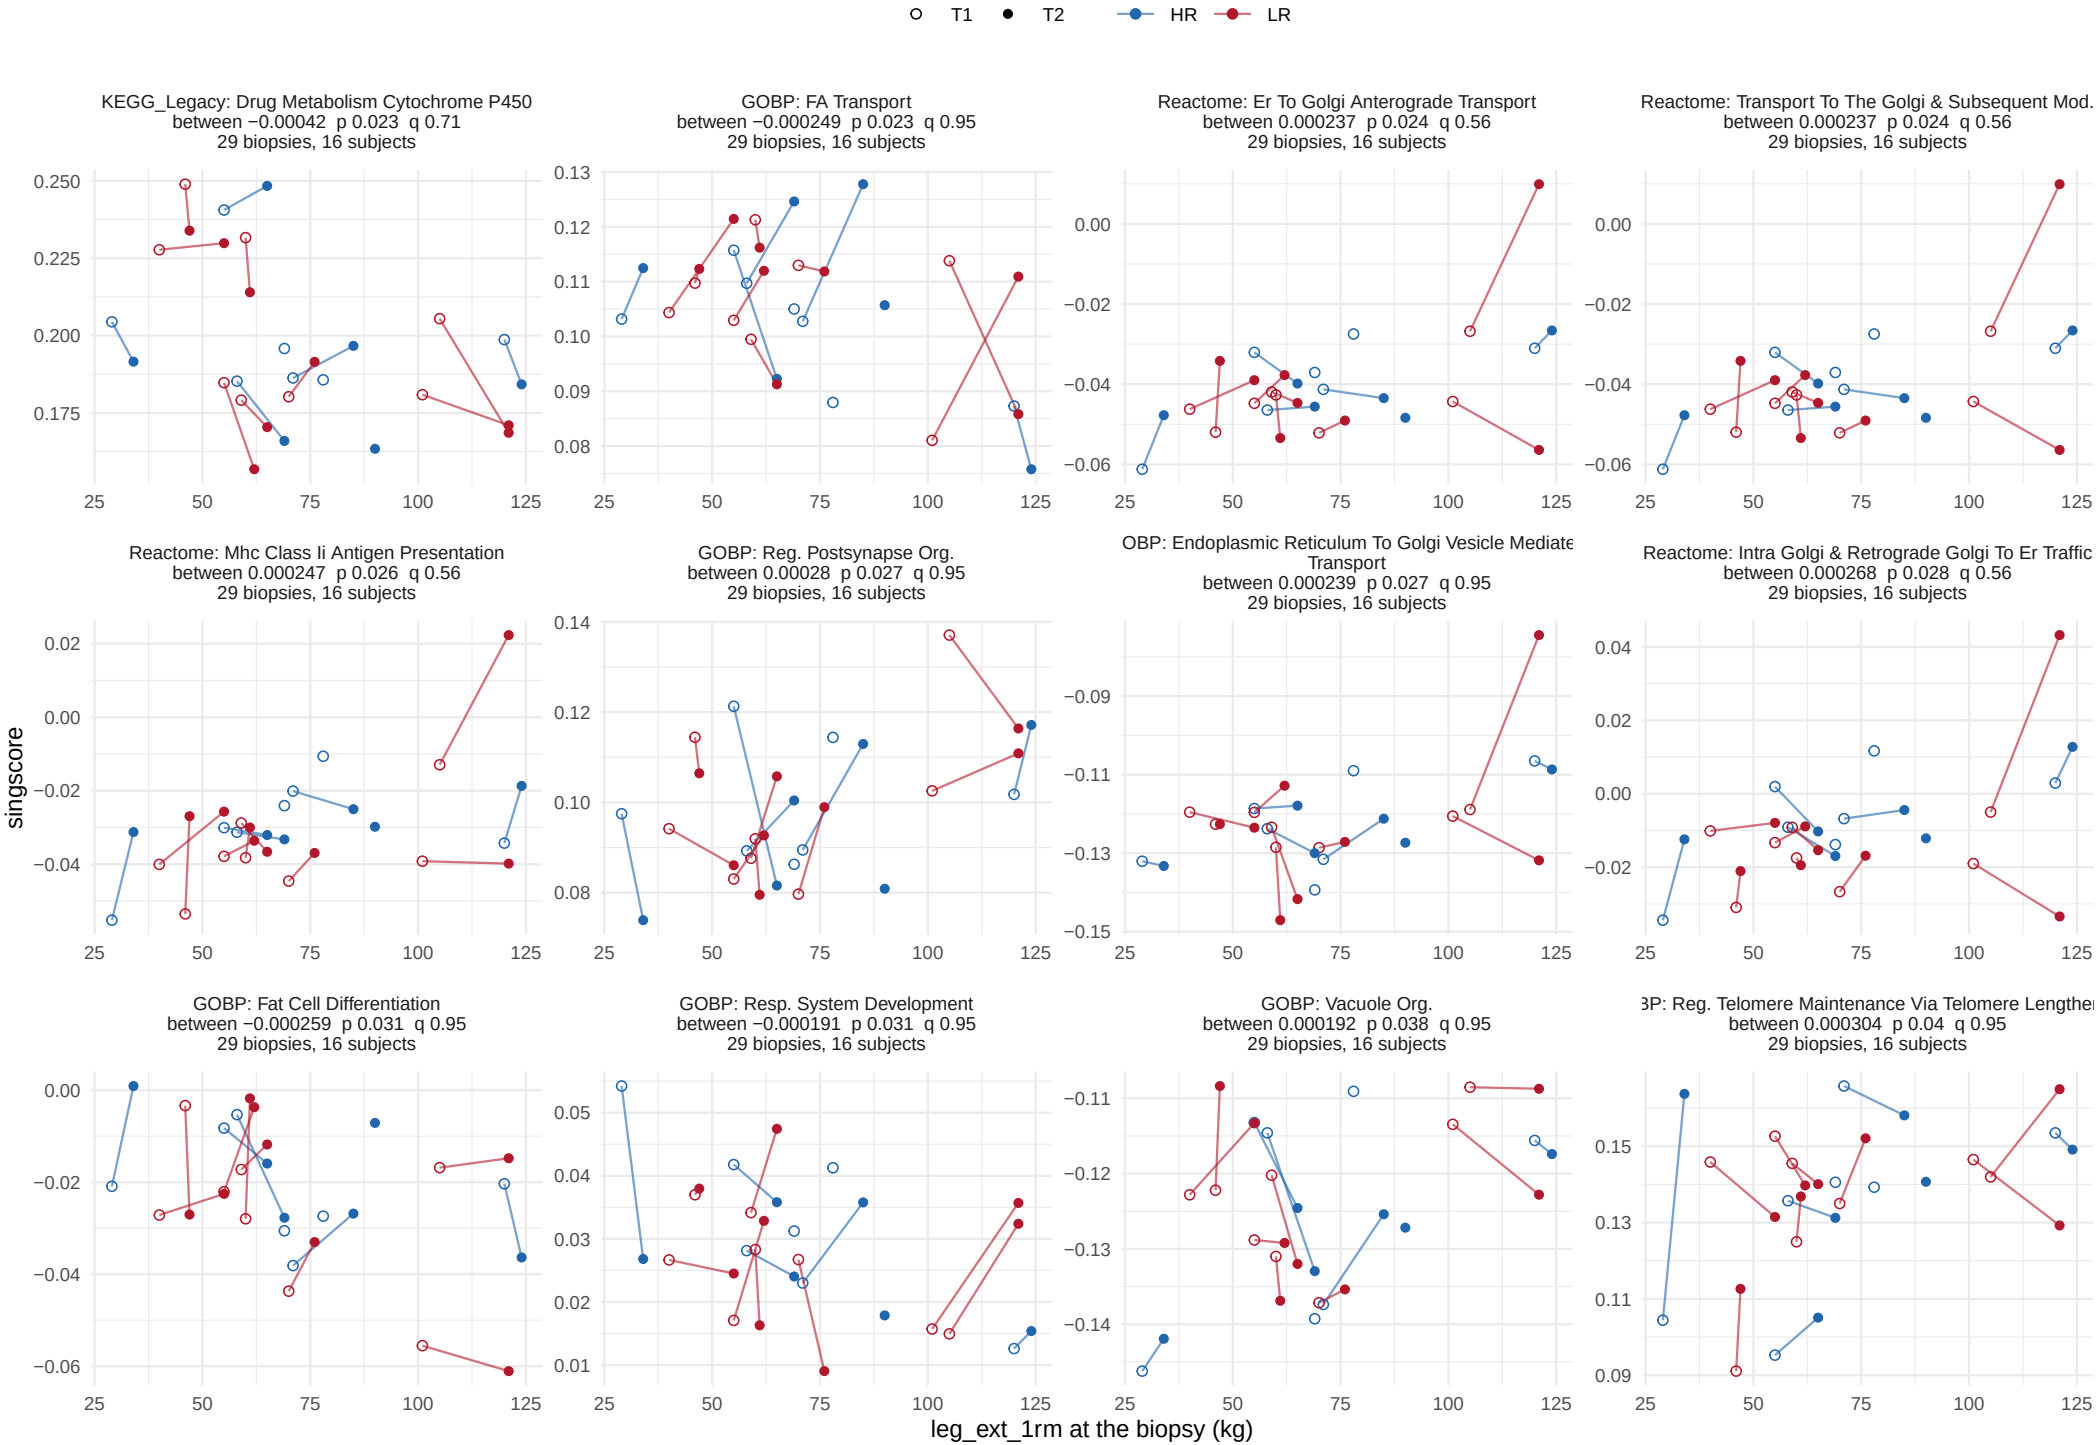


limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

## leg_ext_1rm, between−person term


34 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 3 of 3.

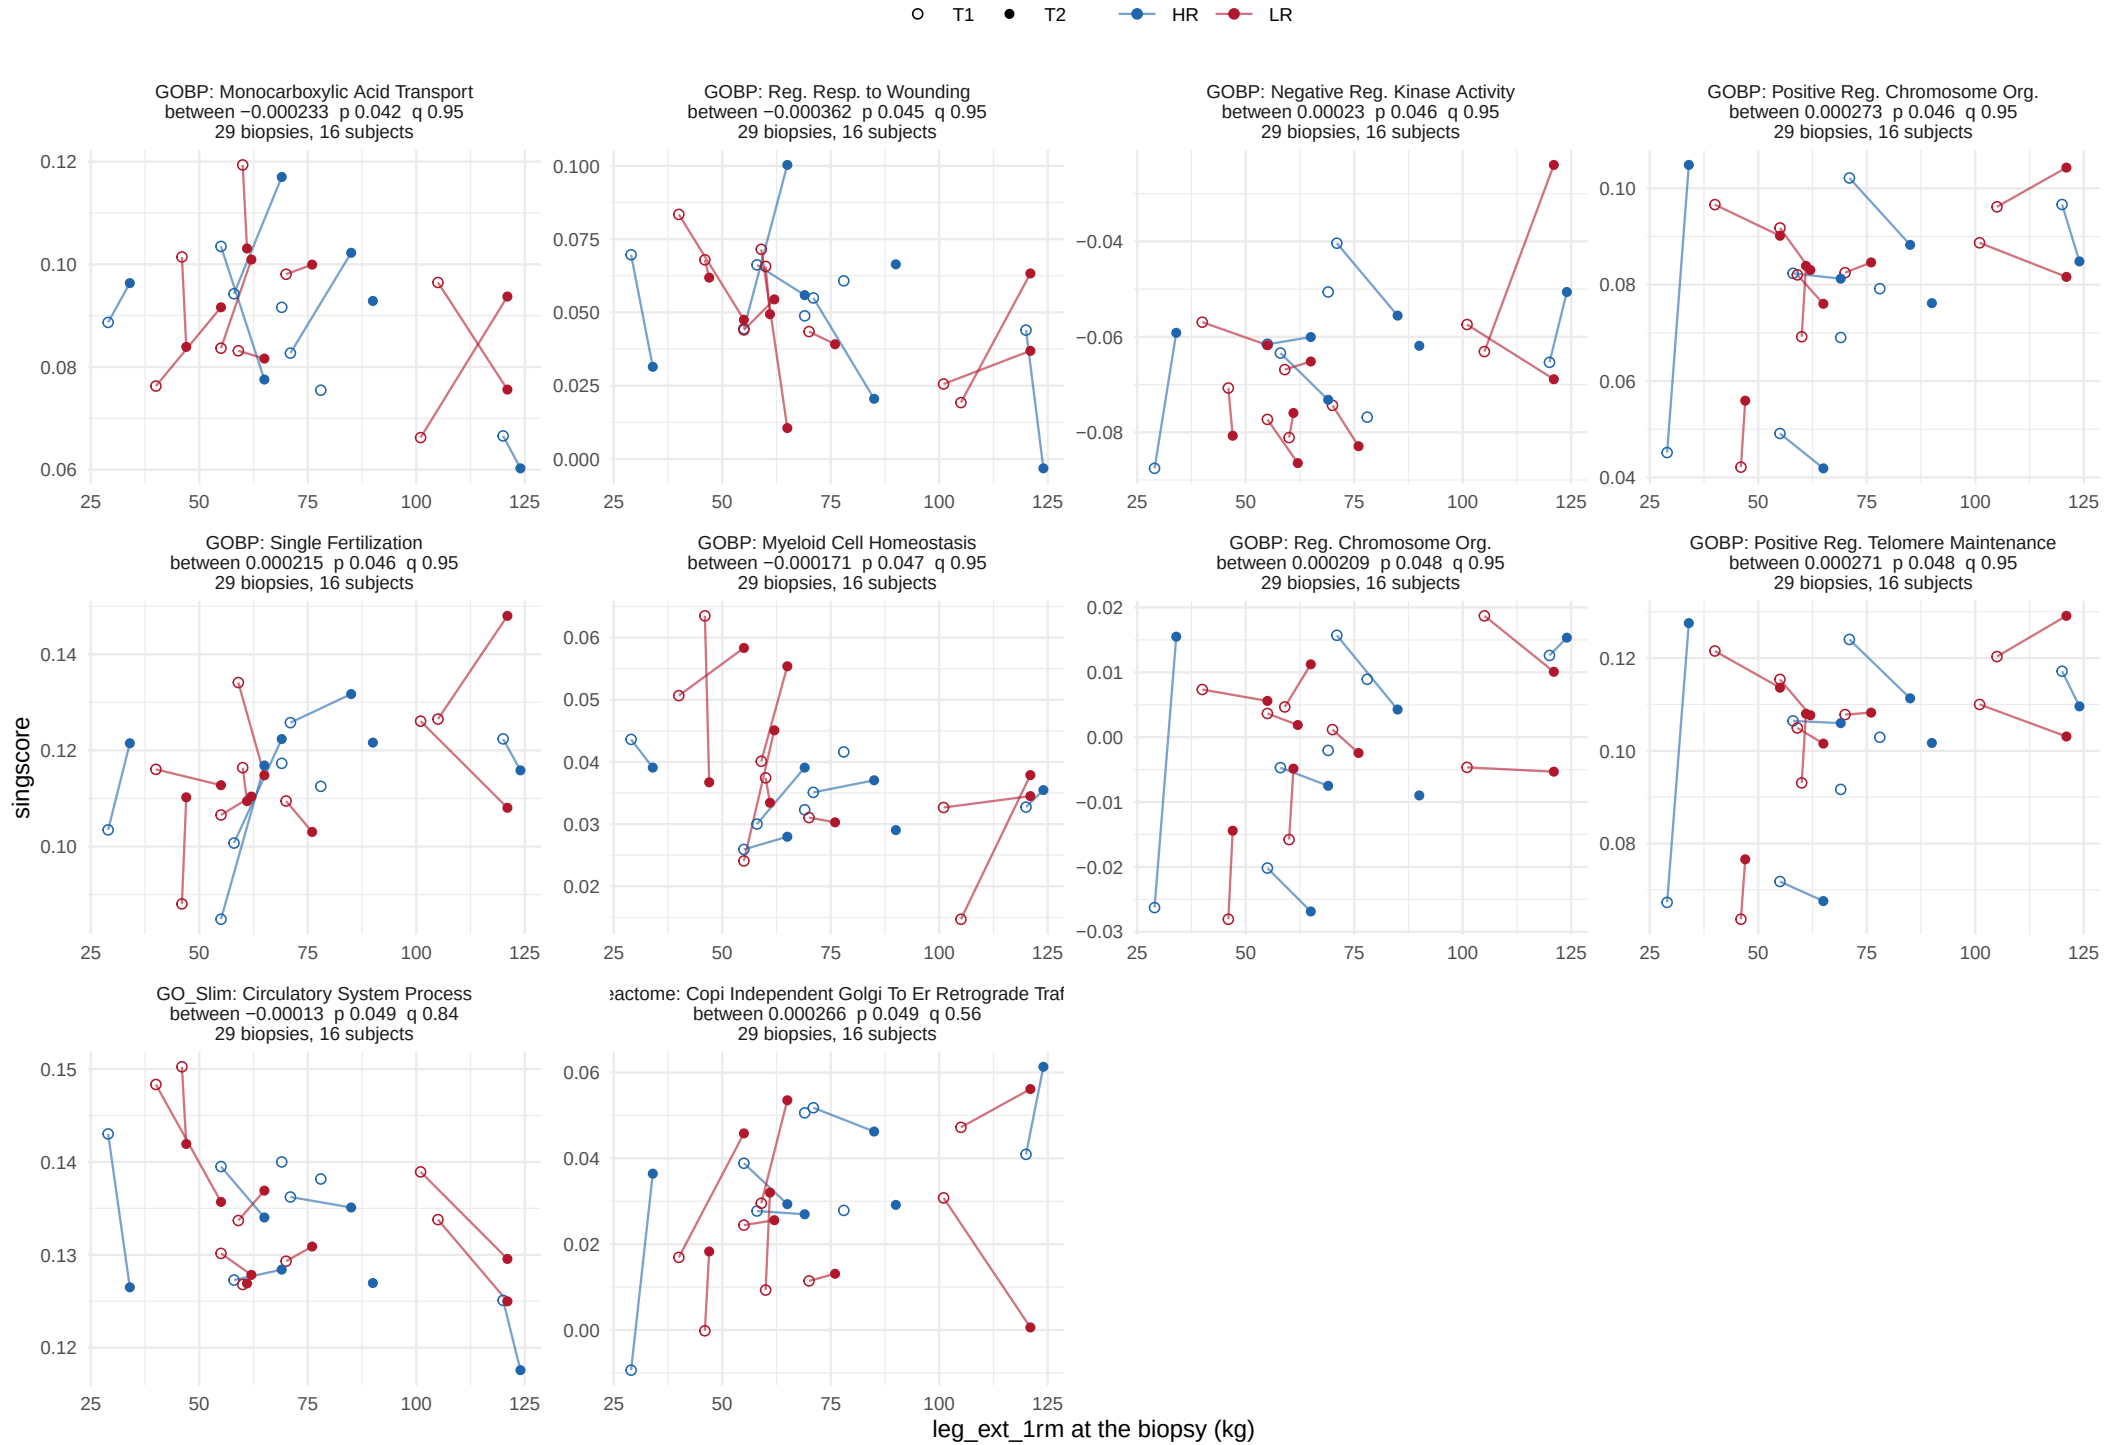


limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait, term and collection, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

## Change score, training window


456 of 11024 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 1 of 38.

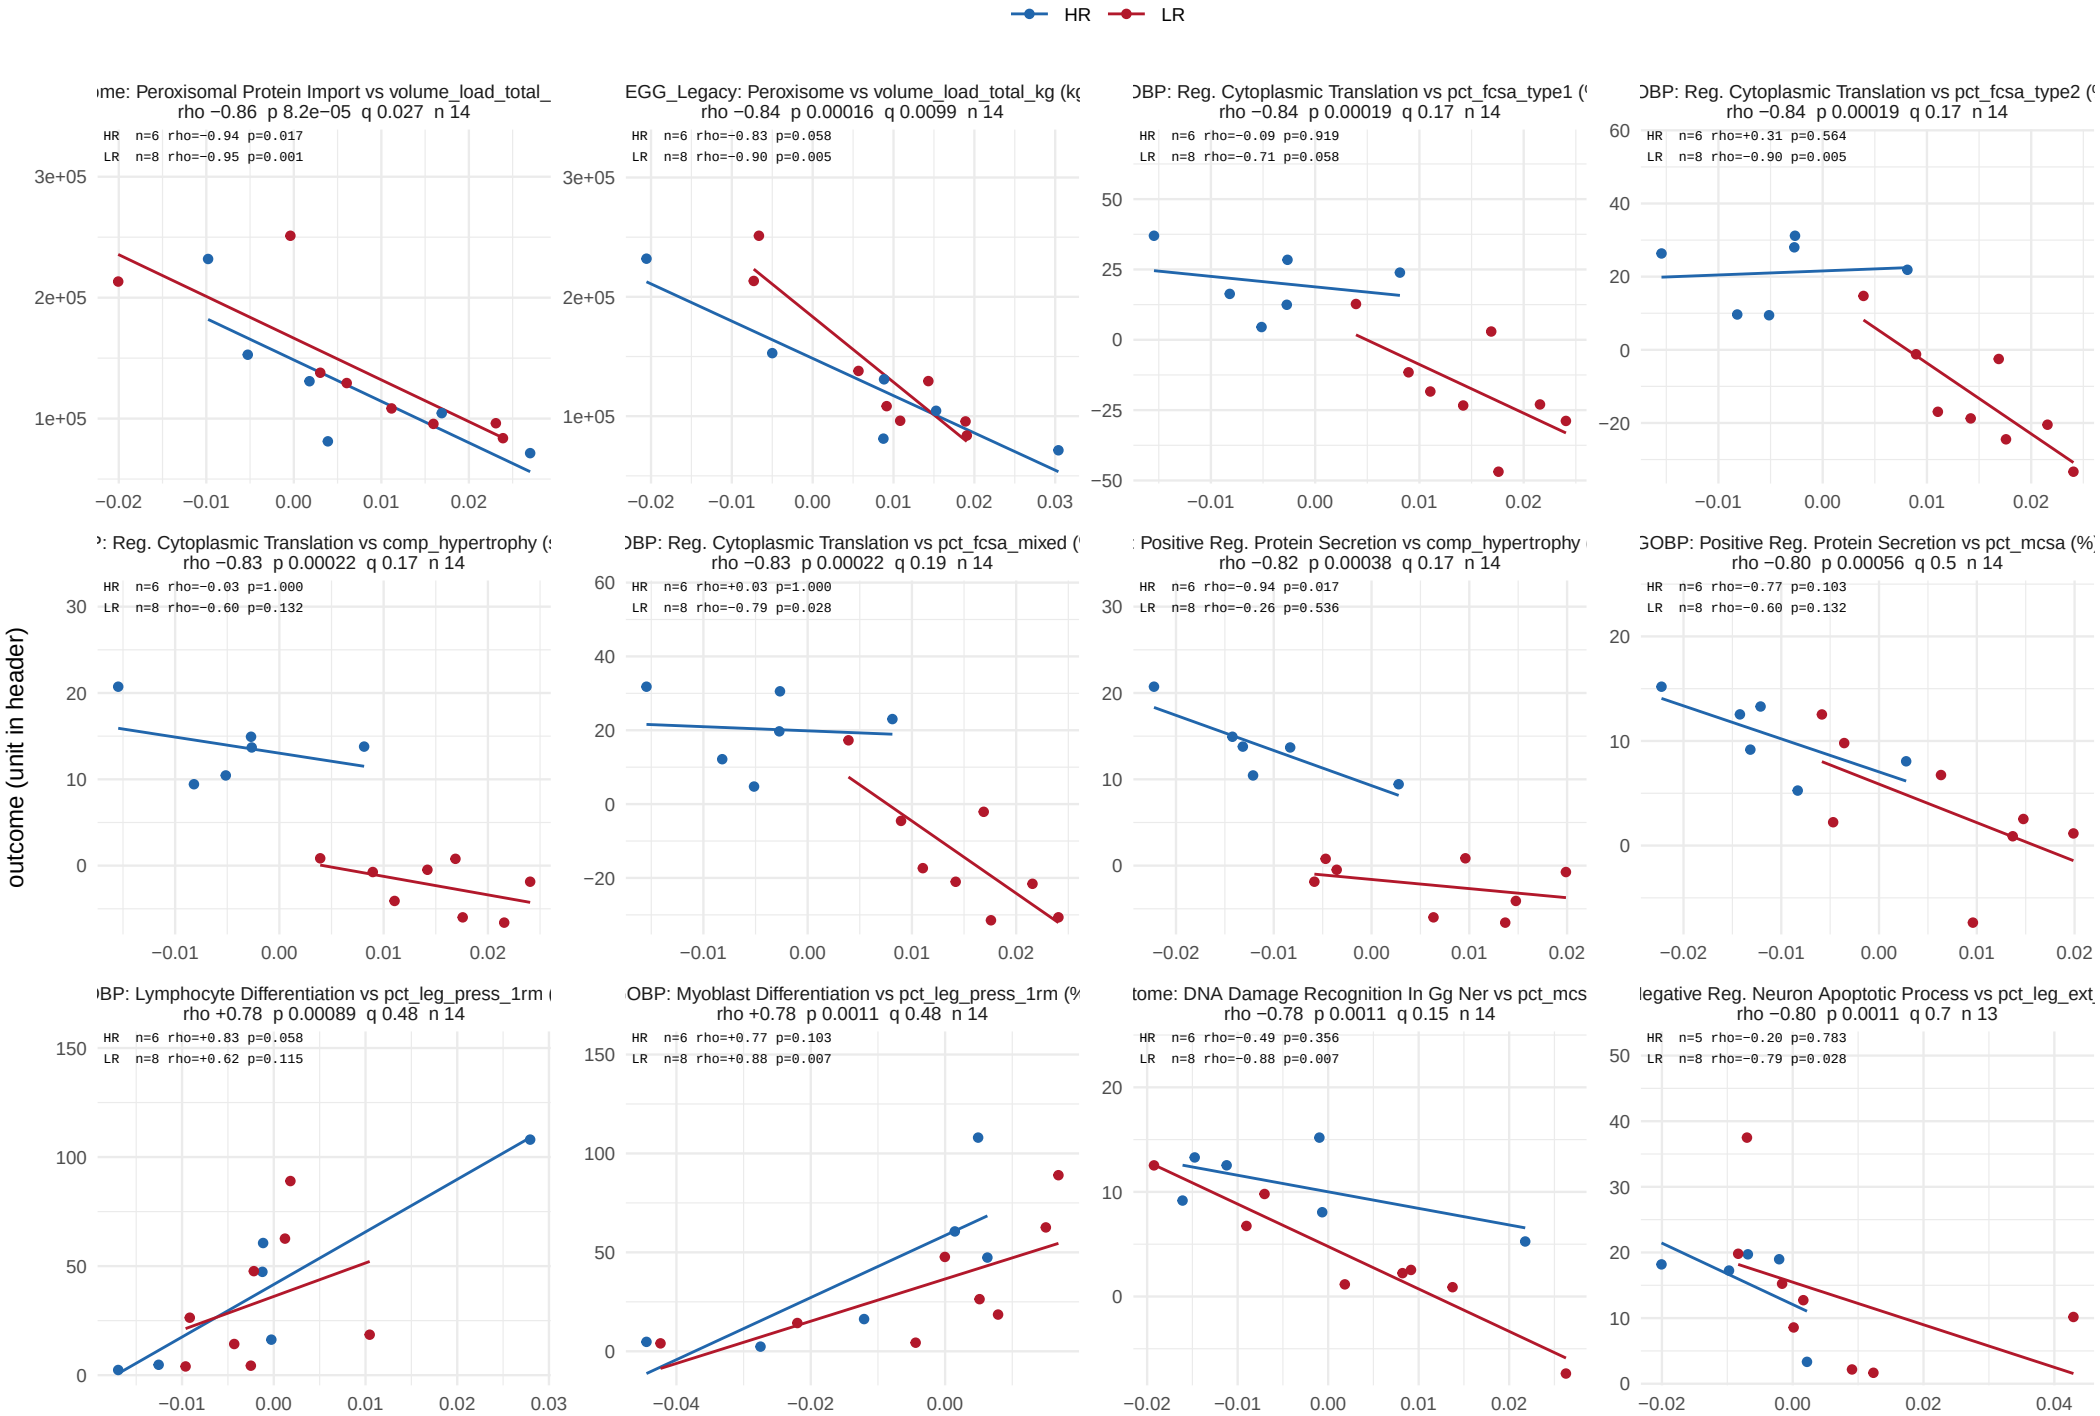


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, training window


456 of 11024 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 2 of 38.

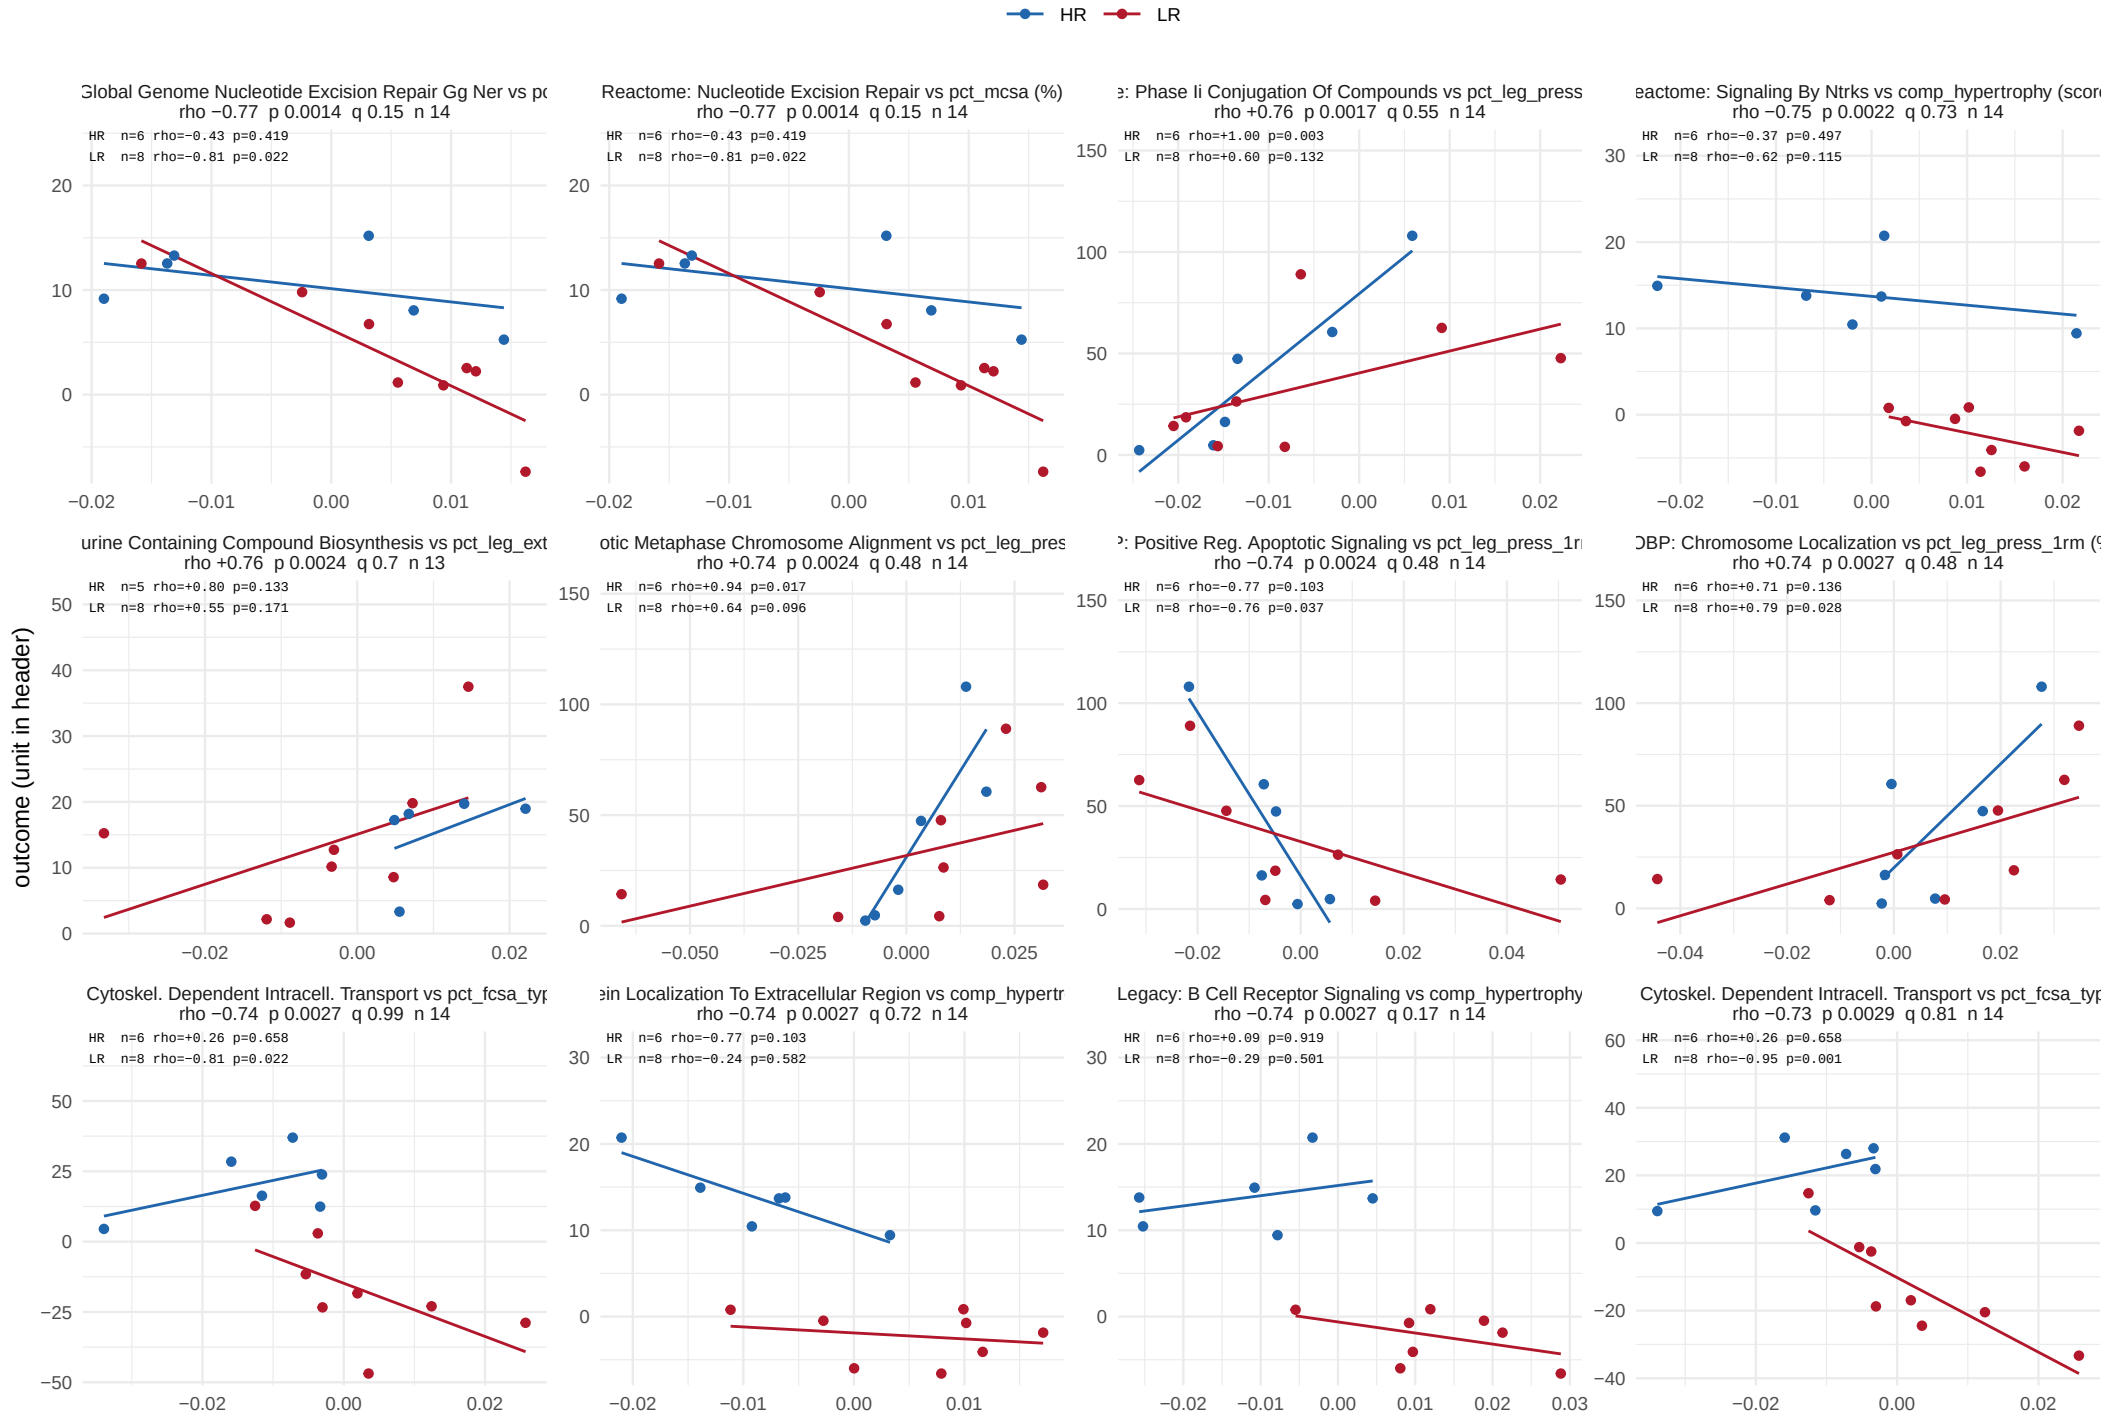


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, training window


456 of 11024 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 3 of 38.

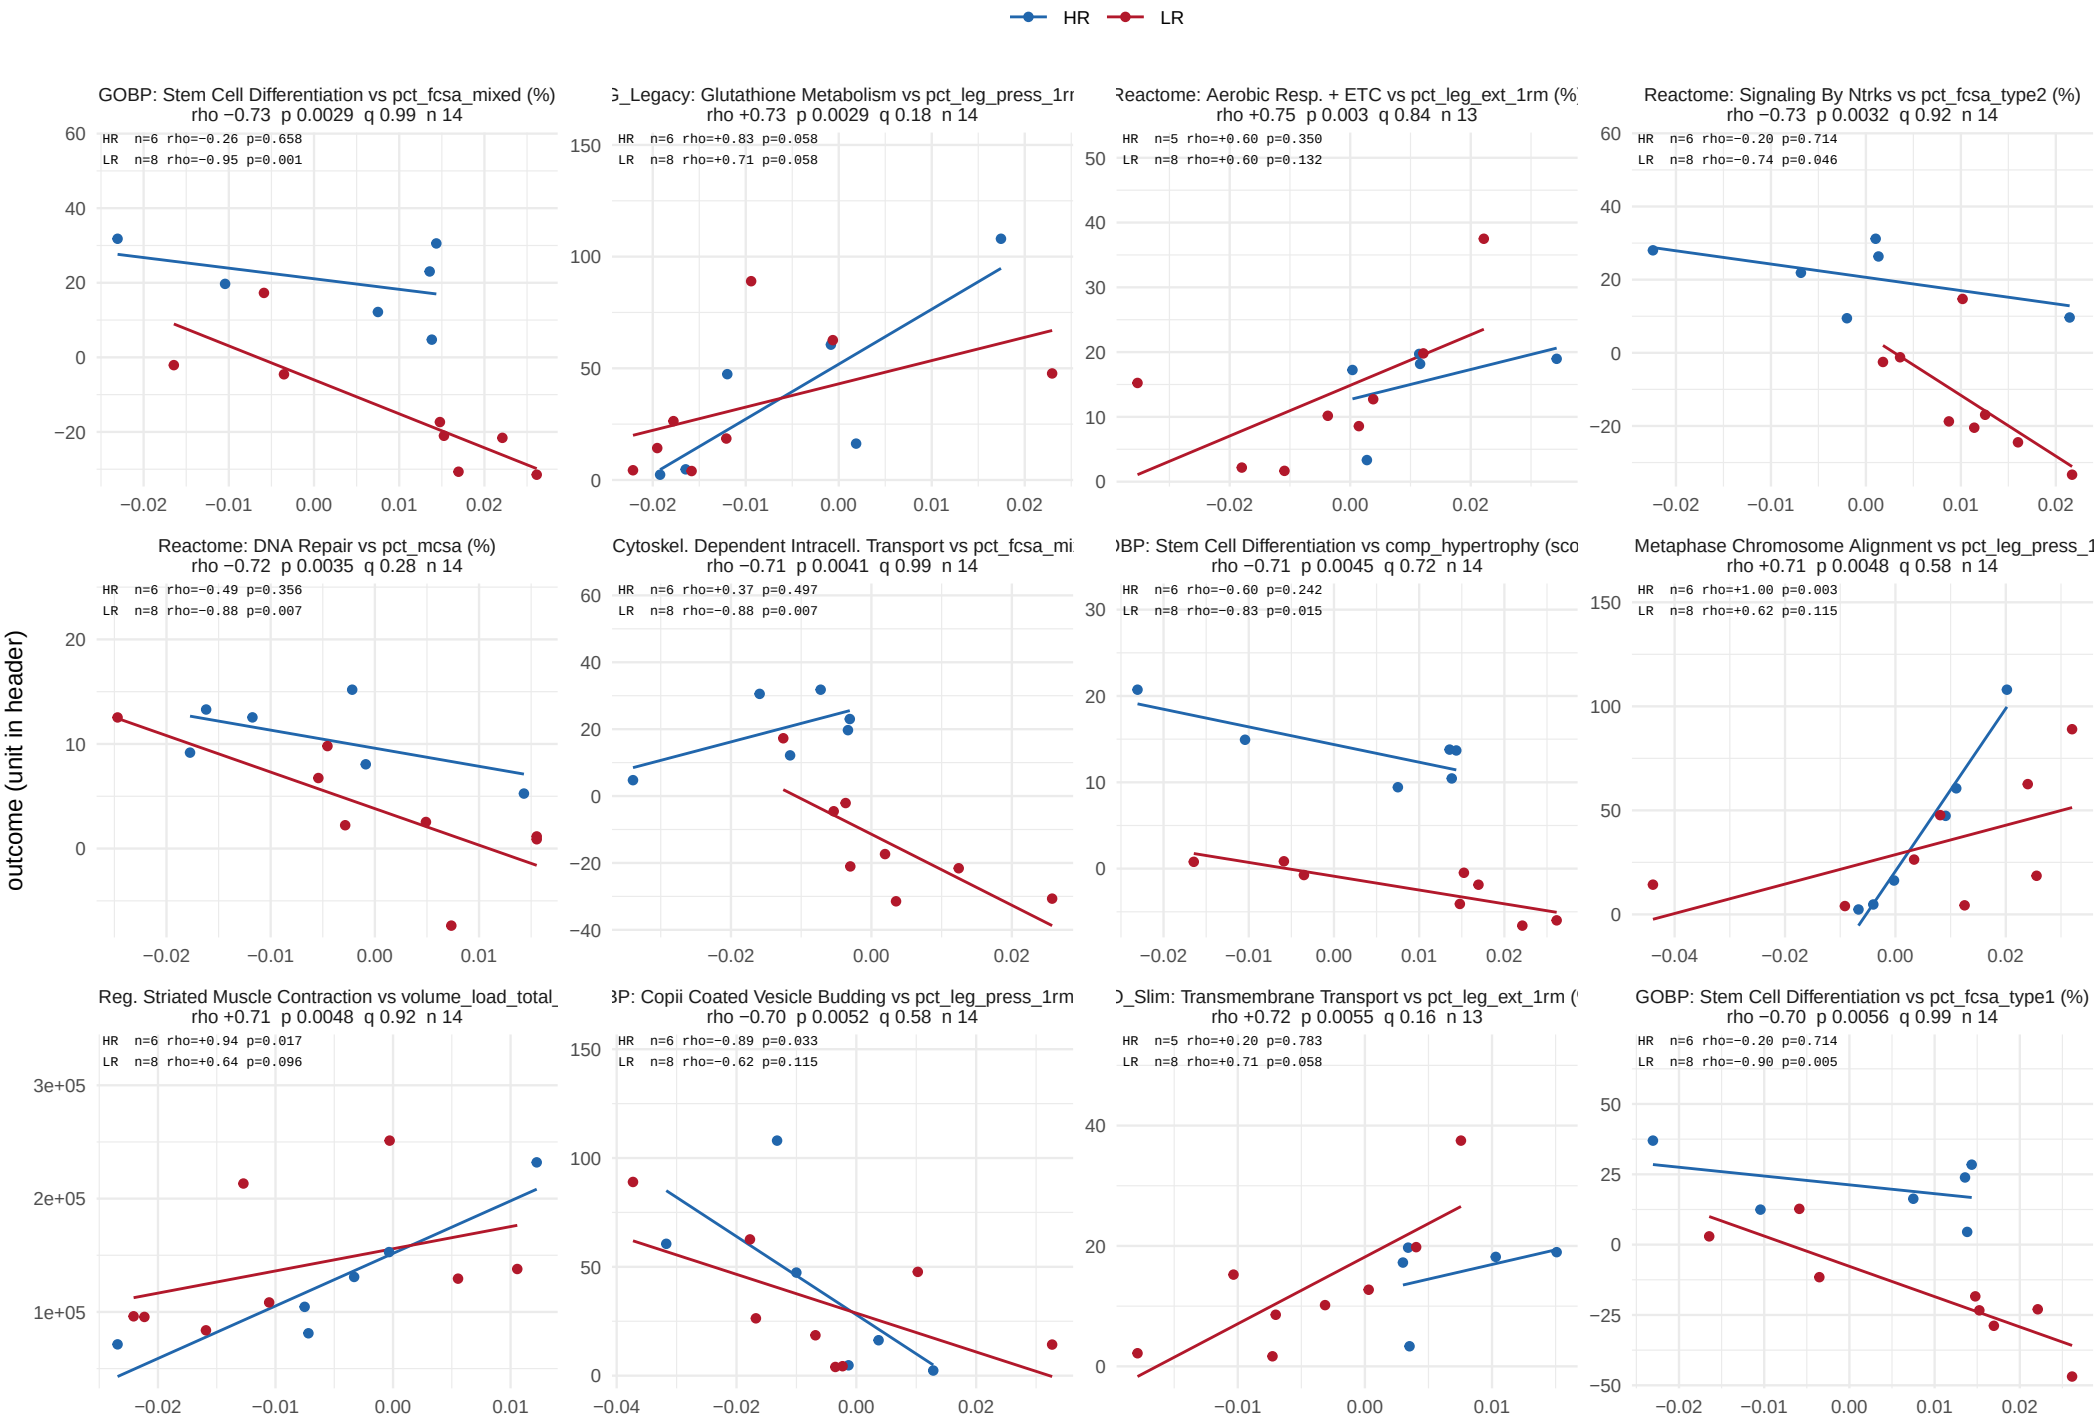


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, training window


456 of 11024 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 4 of 38.

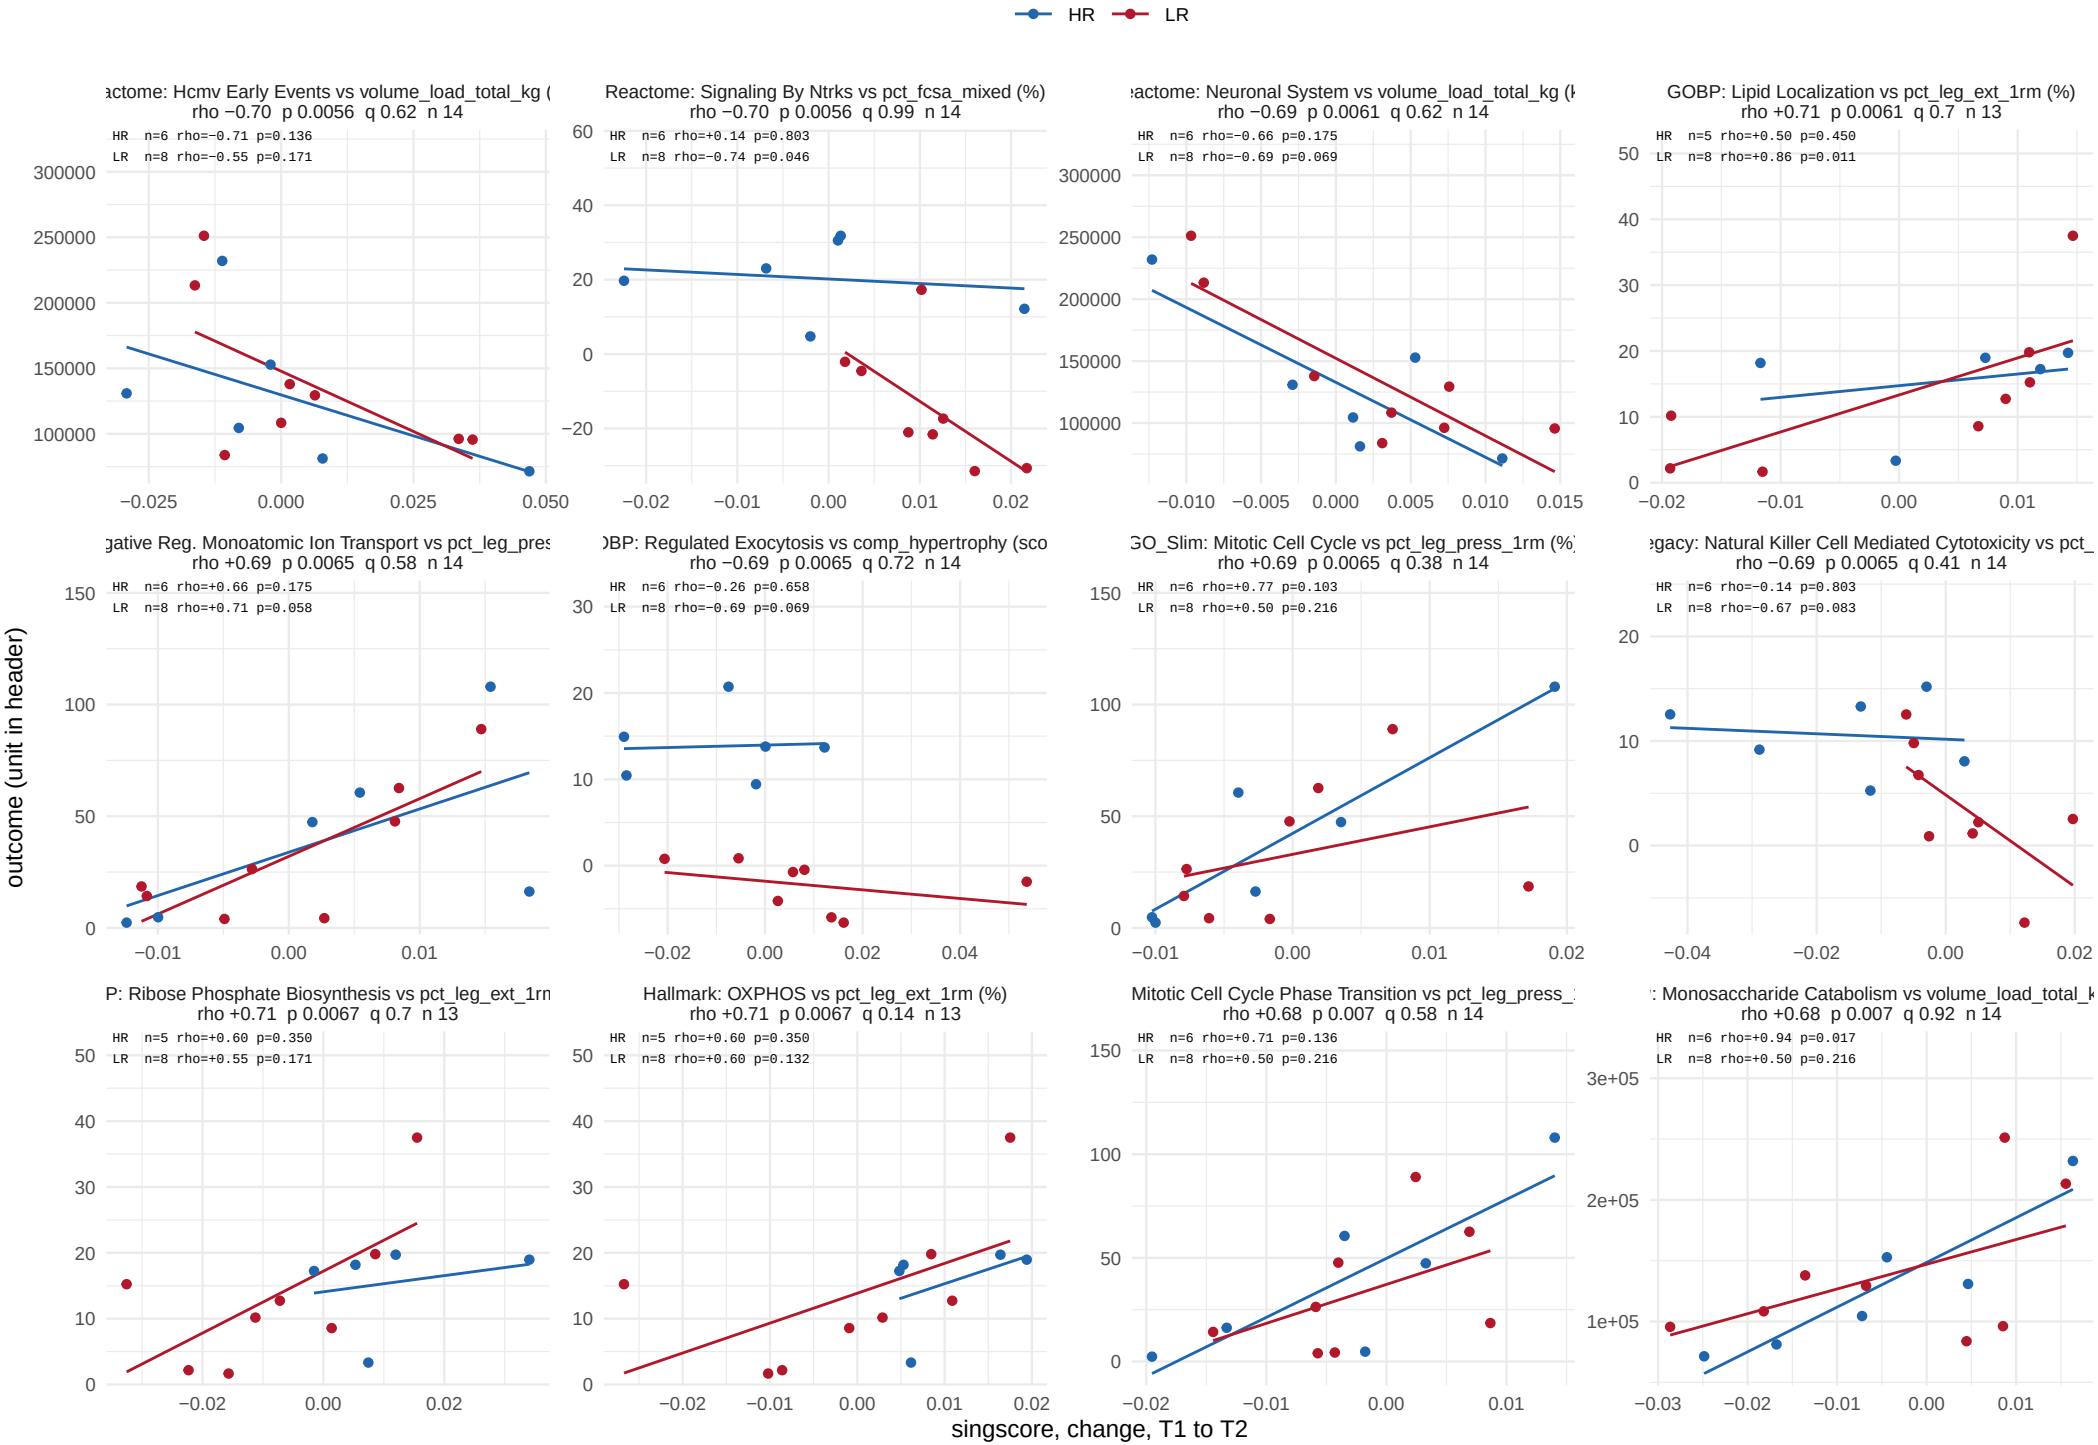


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, training window


456 of 11024 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 5 of 38.

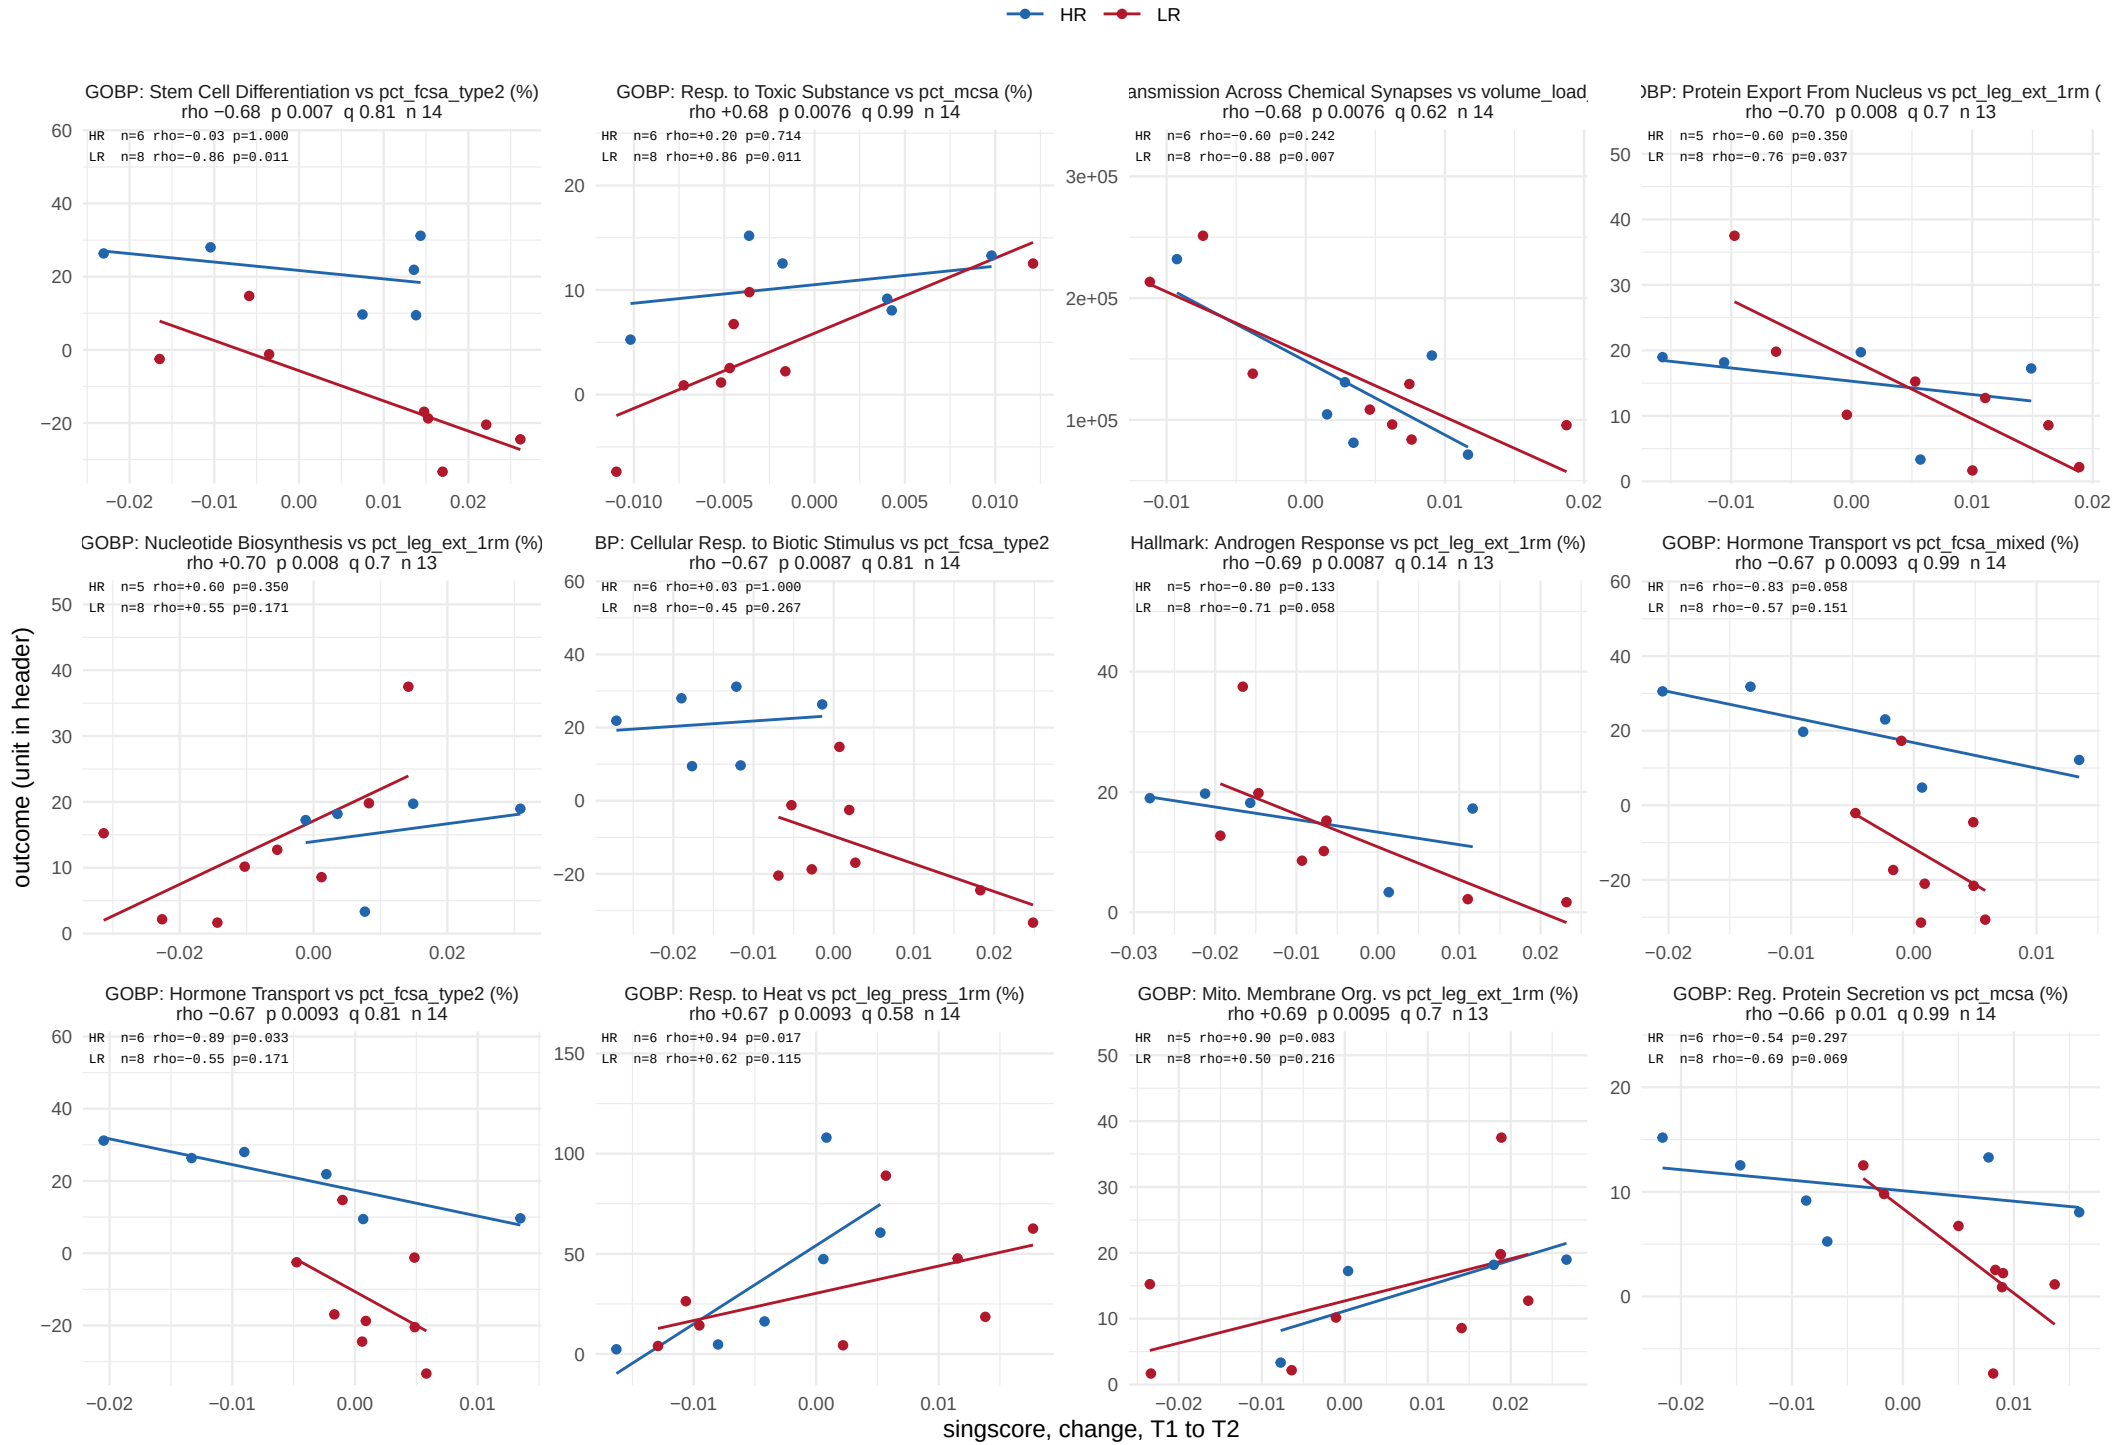


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, training window


456 of 11024 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 6 of 38.

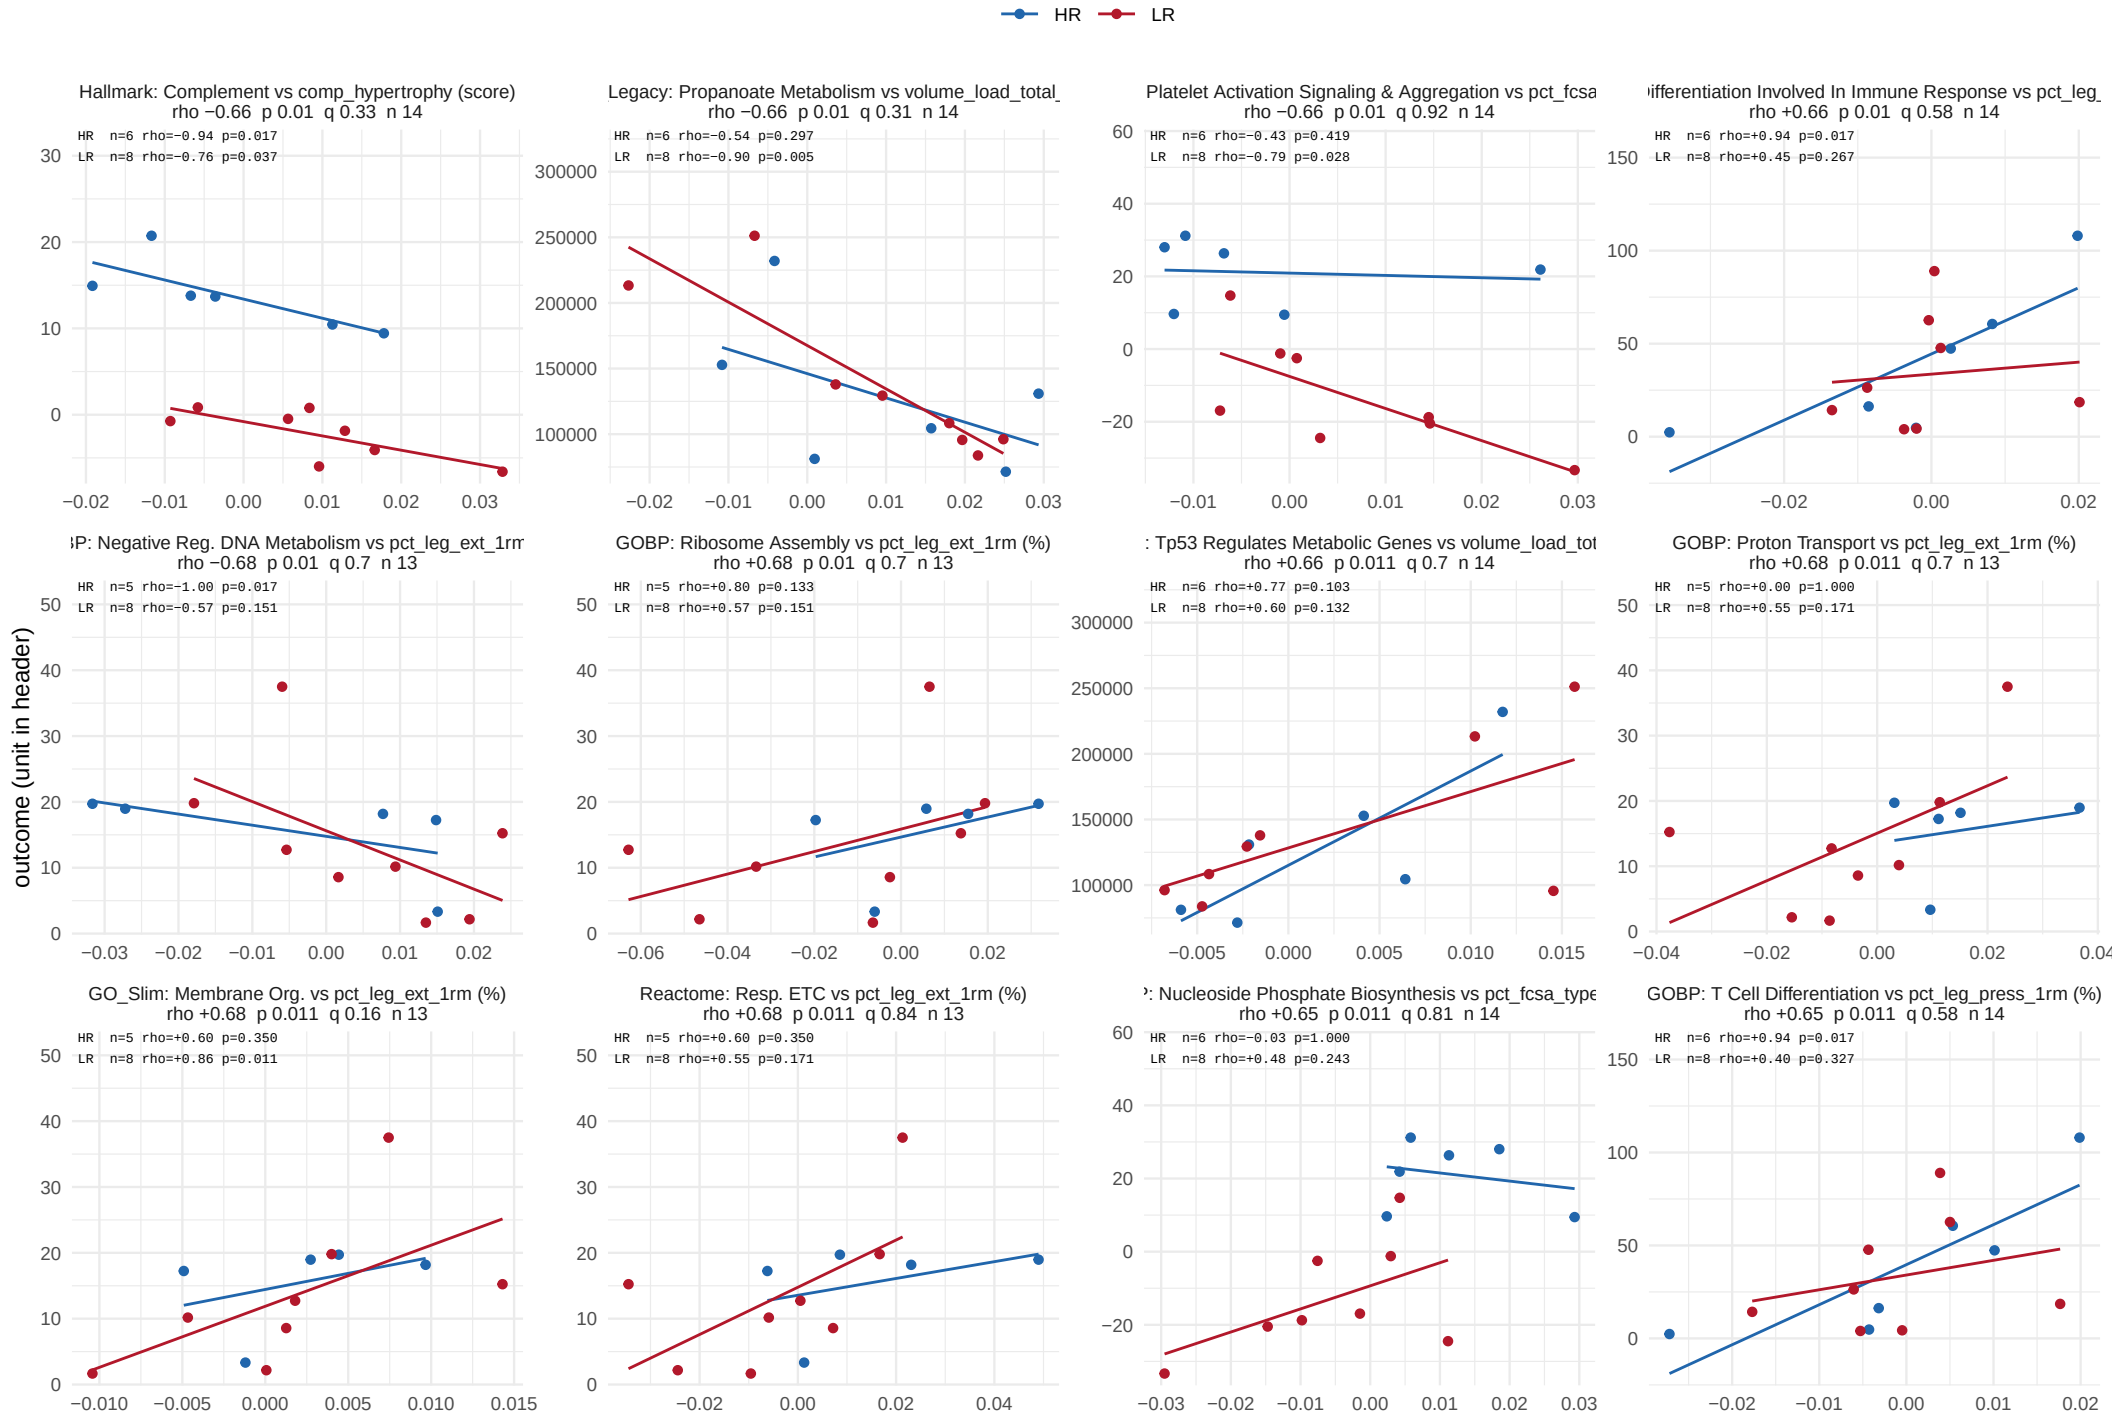


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, training window


456 of 11024 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 7 of 38.

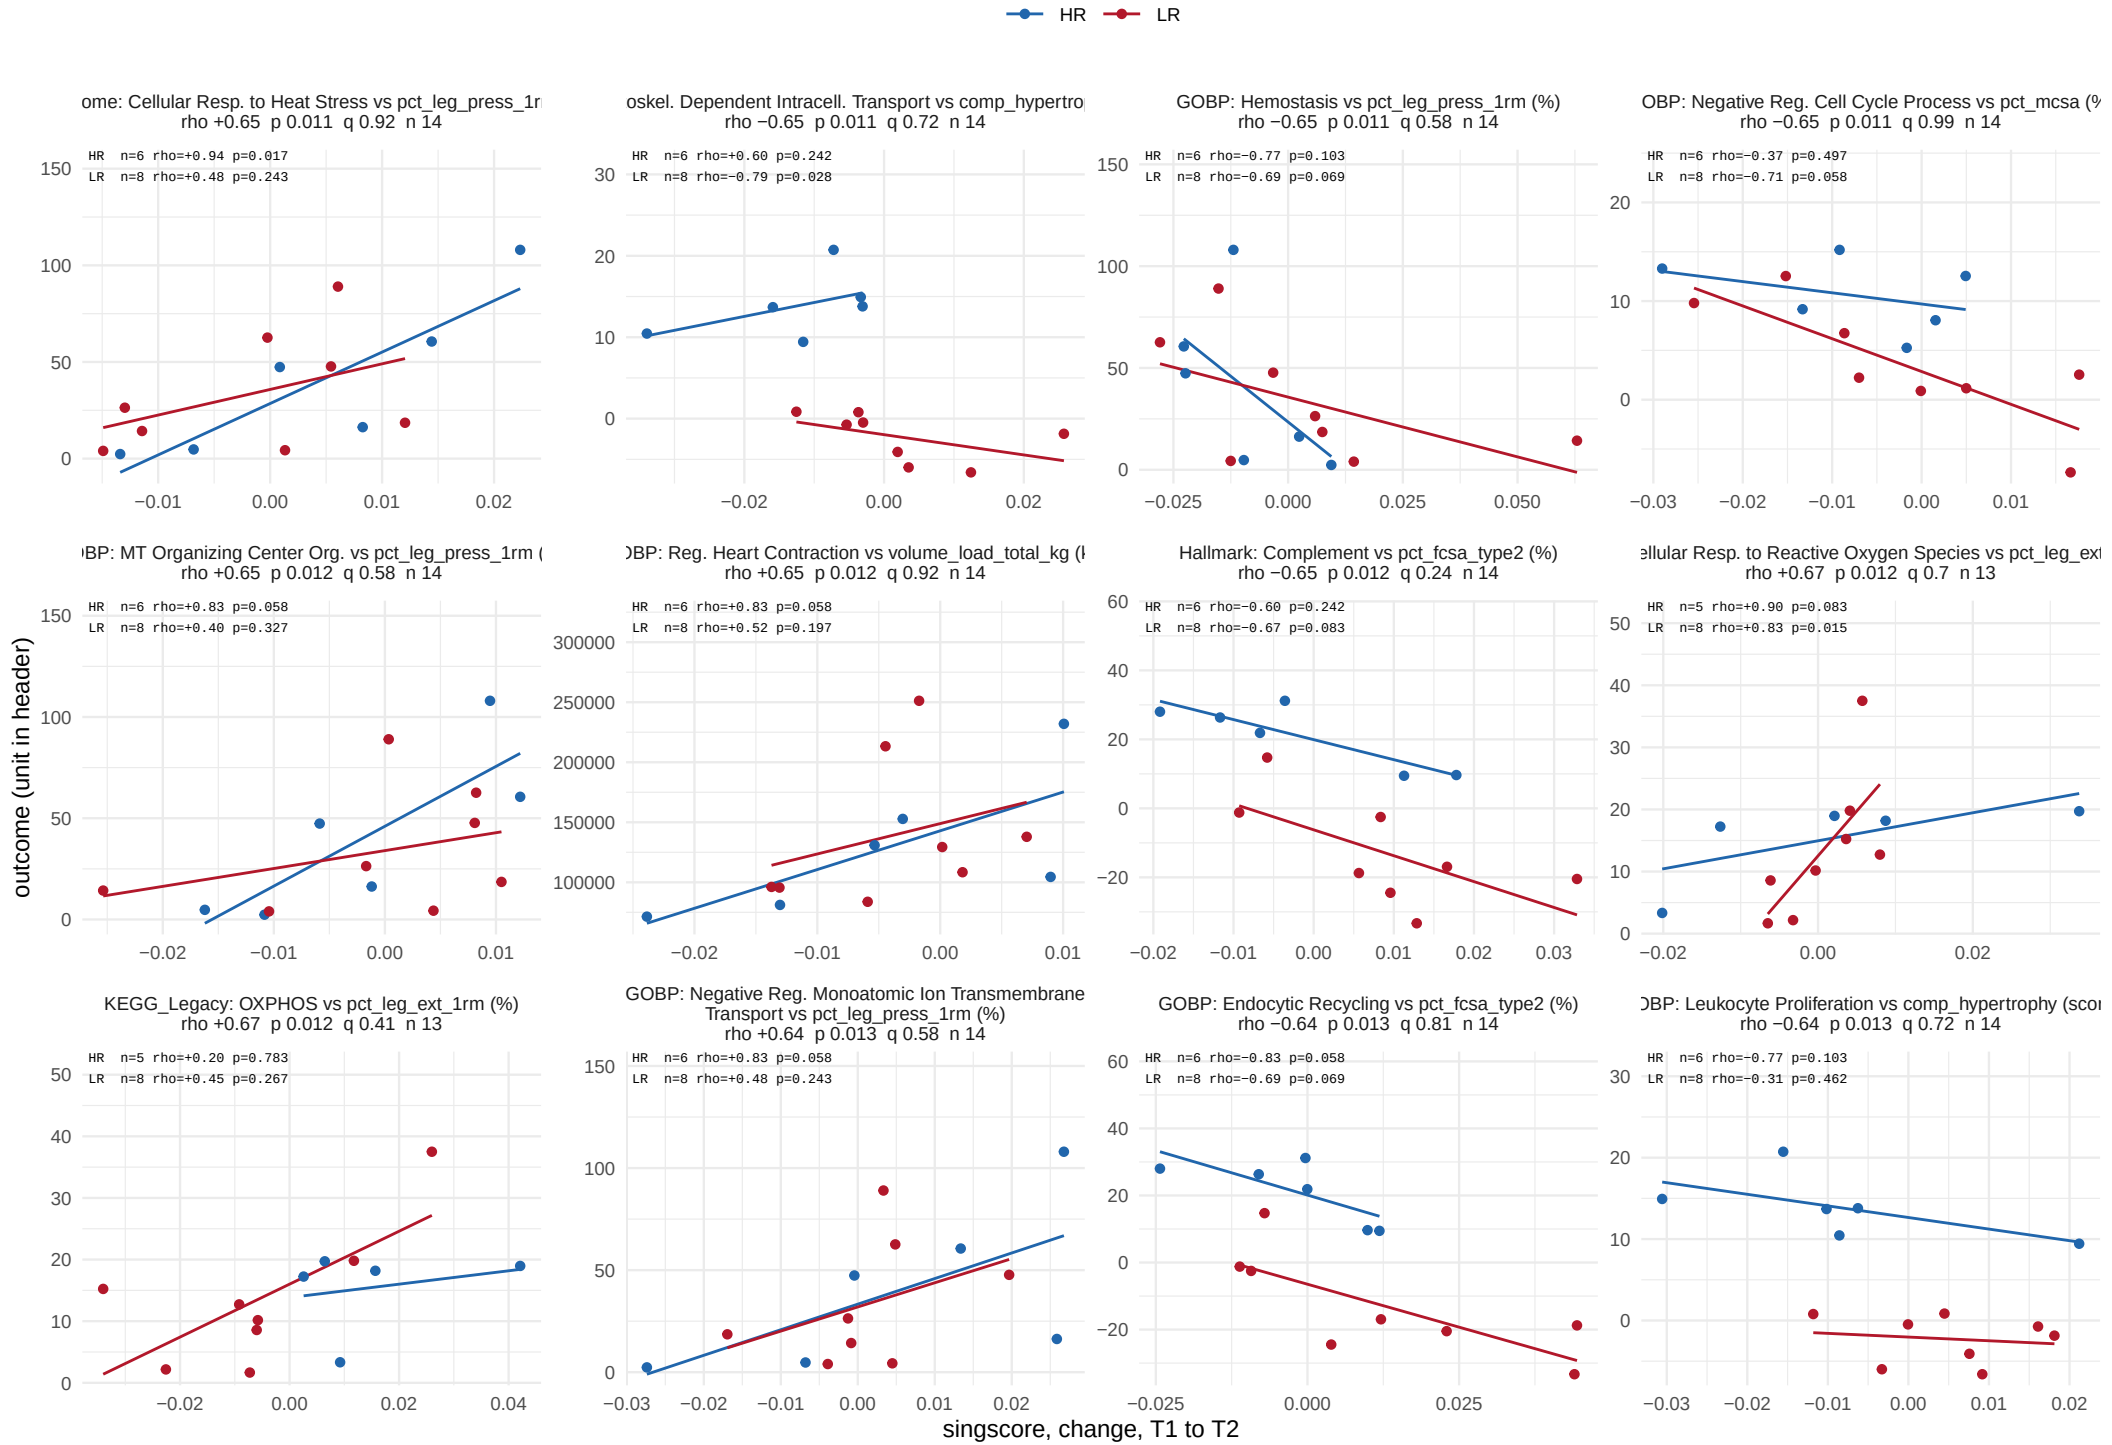


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, training window


456 of 11024 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 8 of 38.

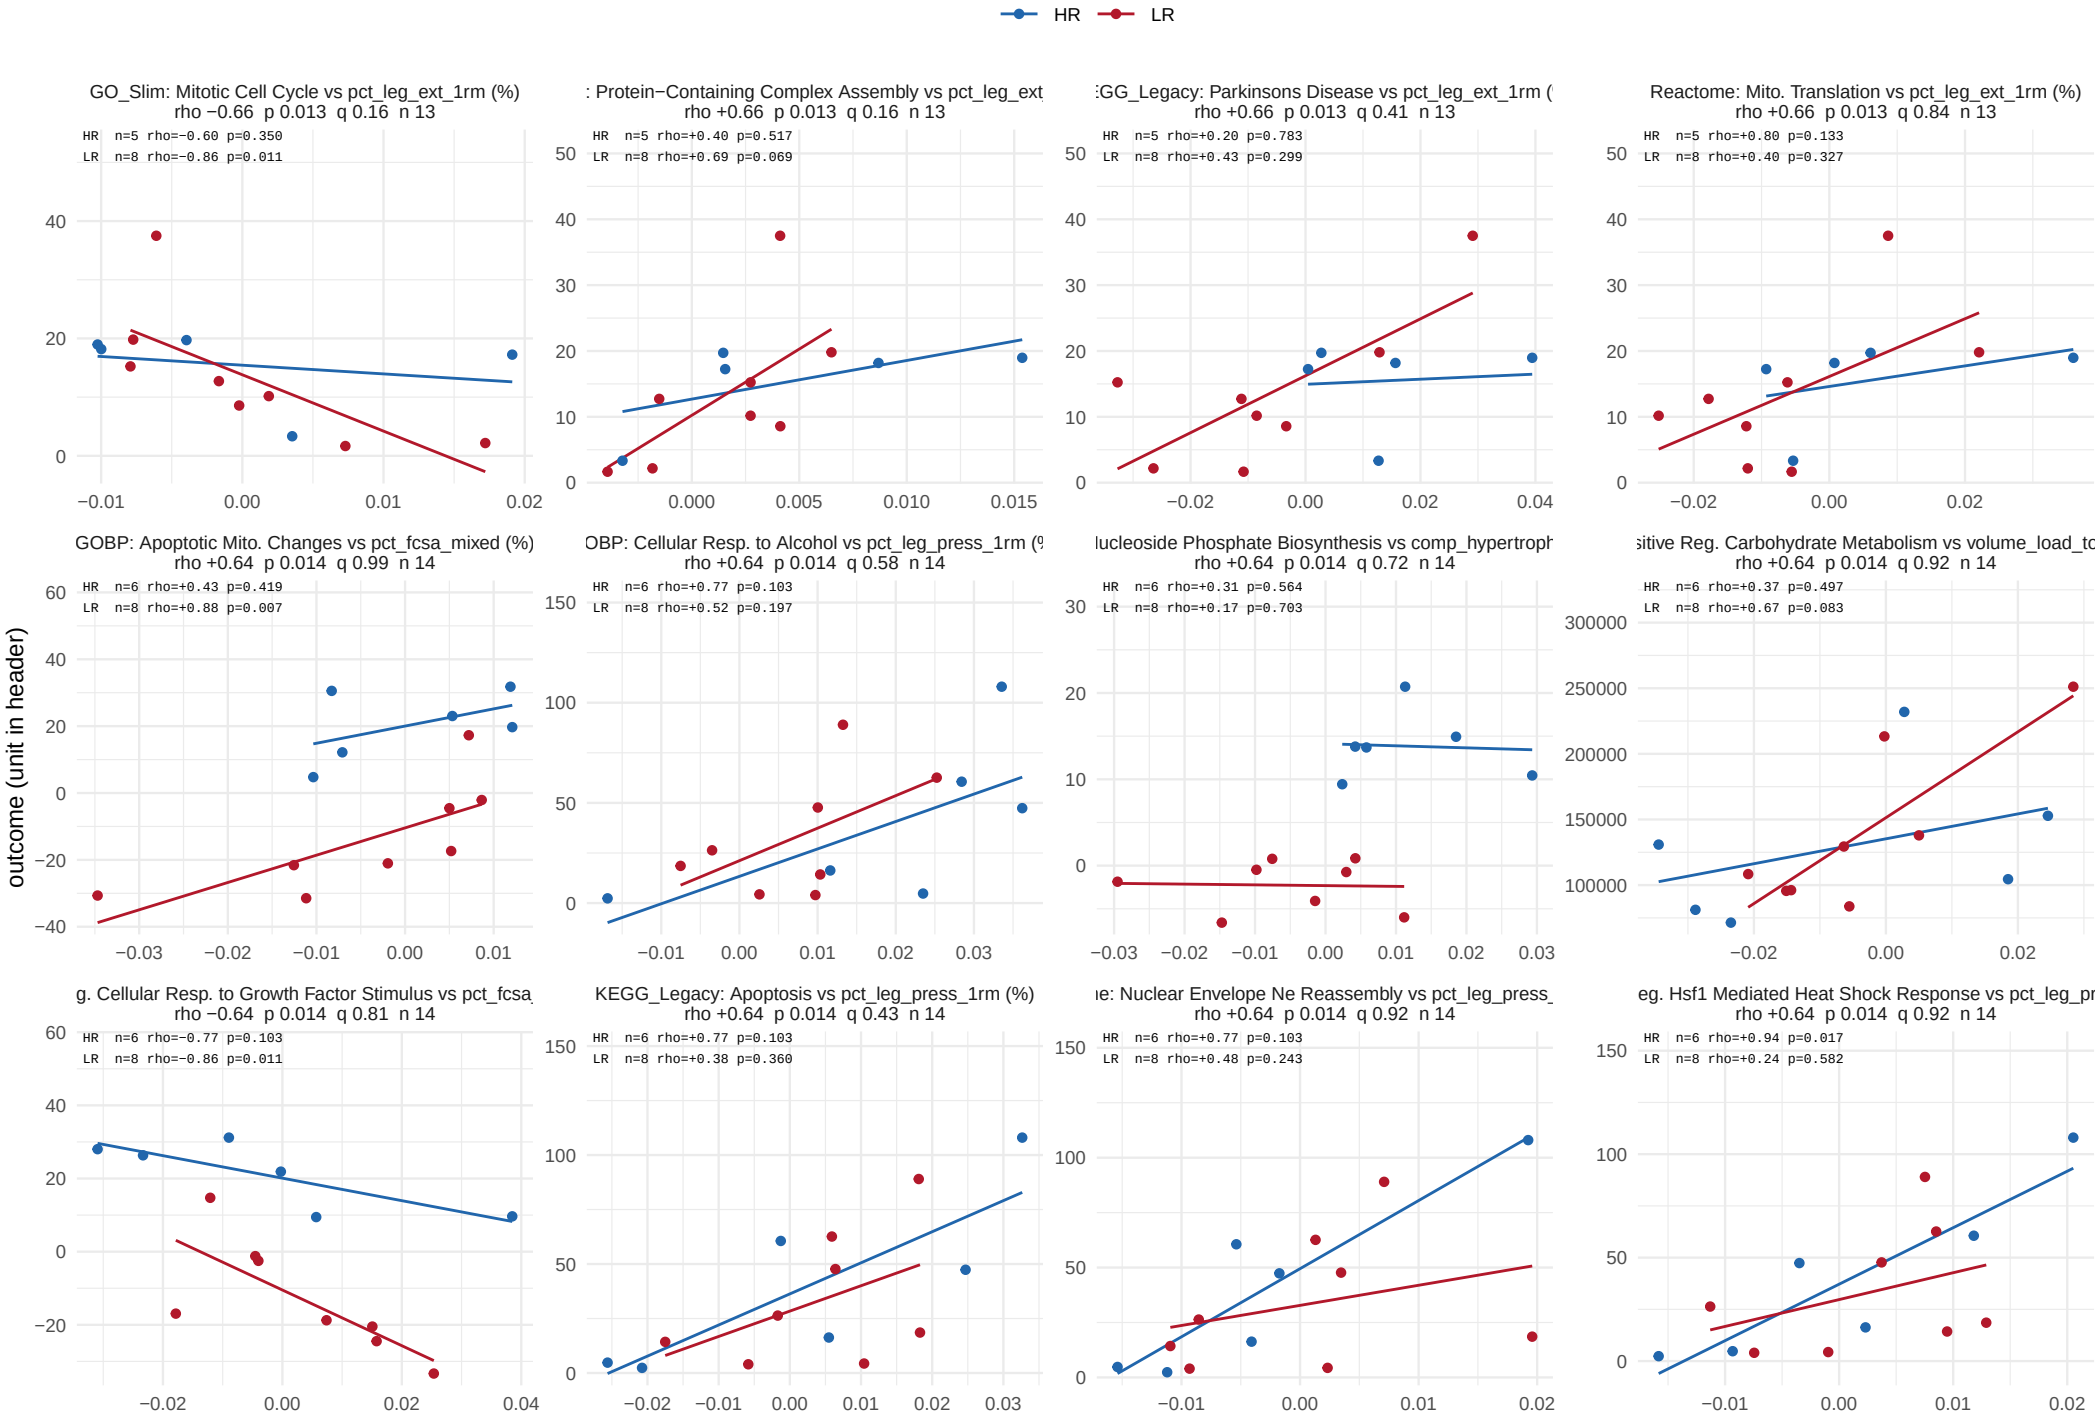


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, training window


456 of 11024 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 9 of 38.

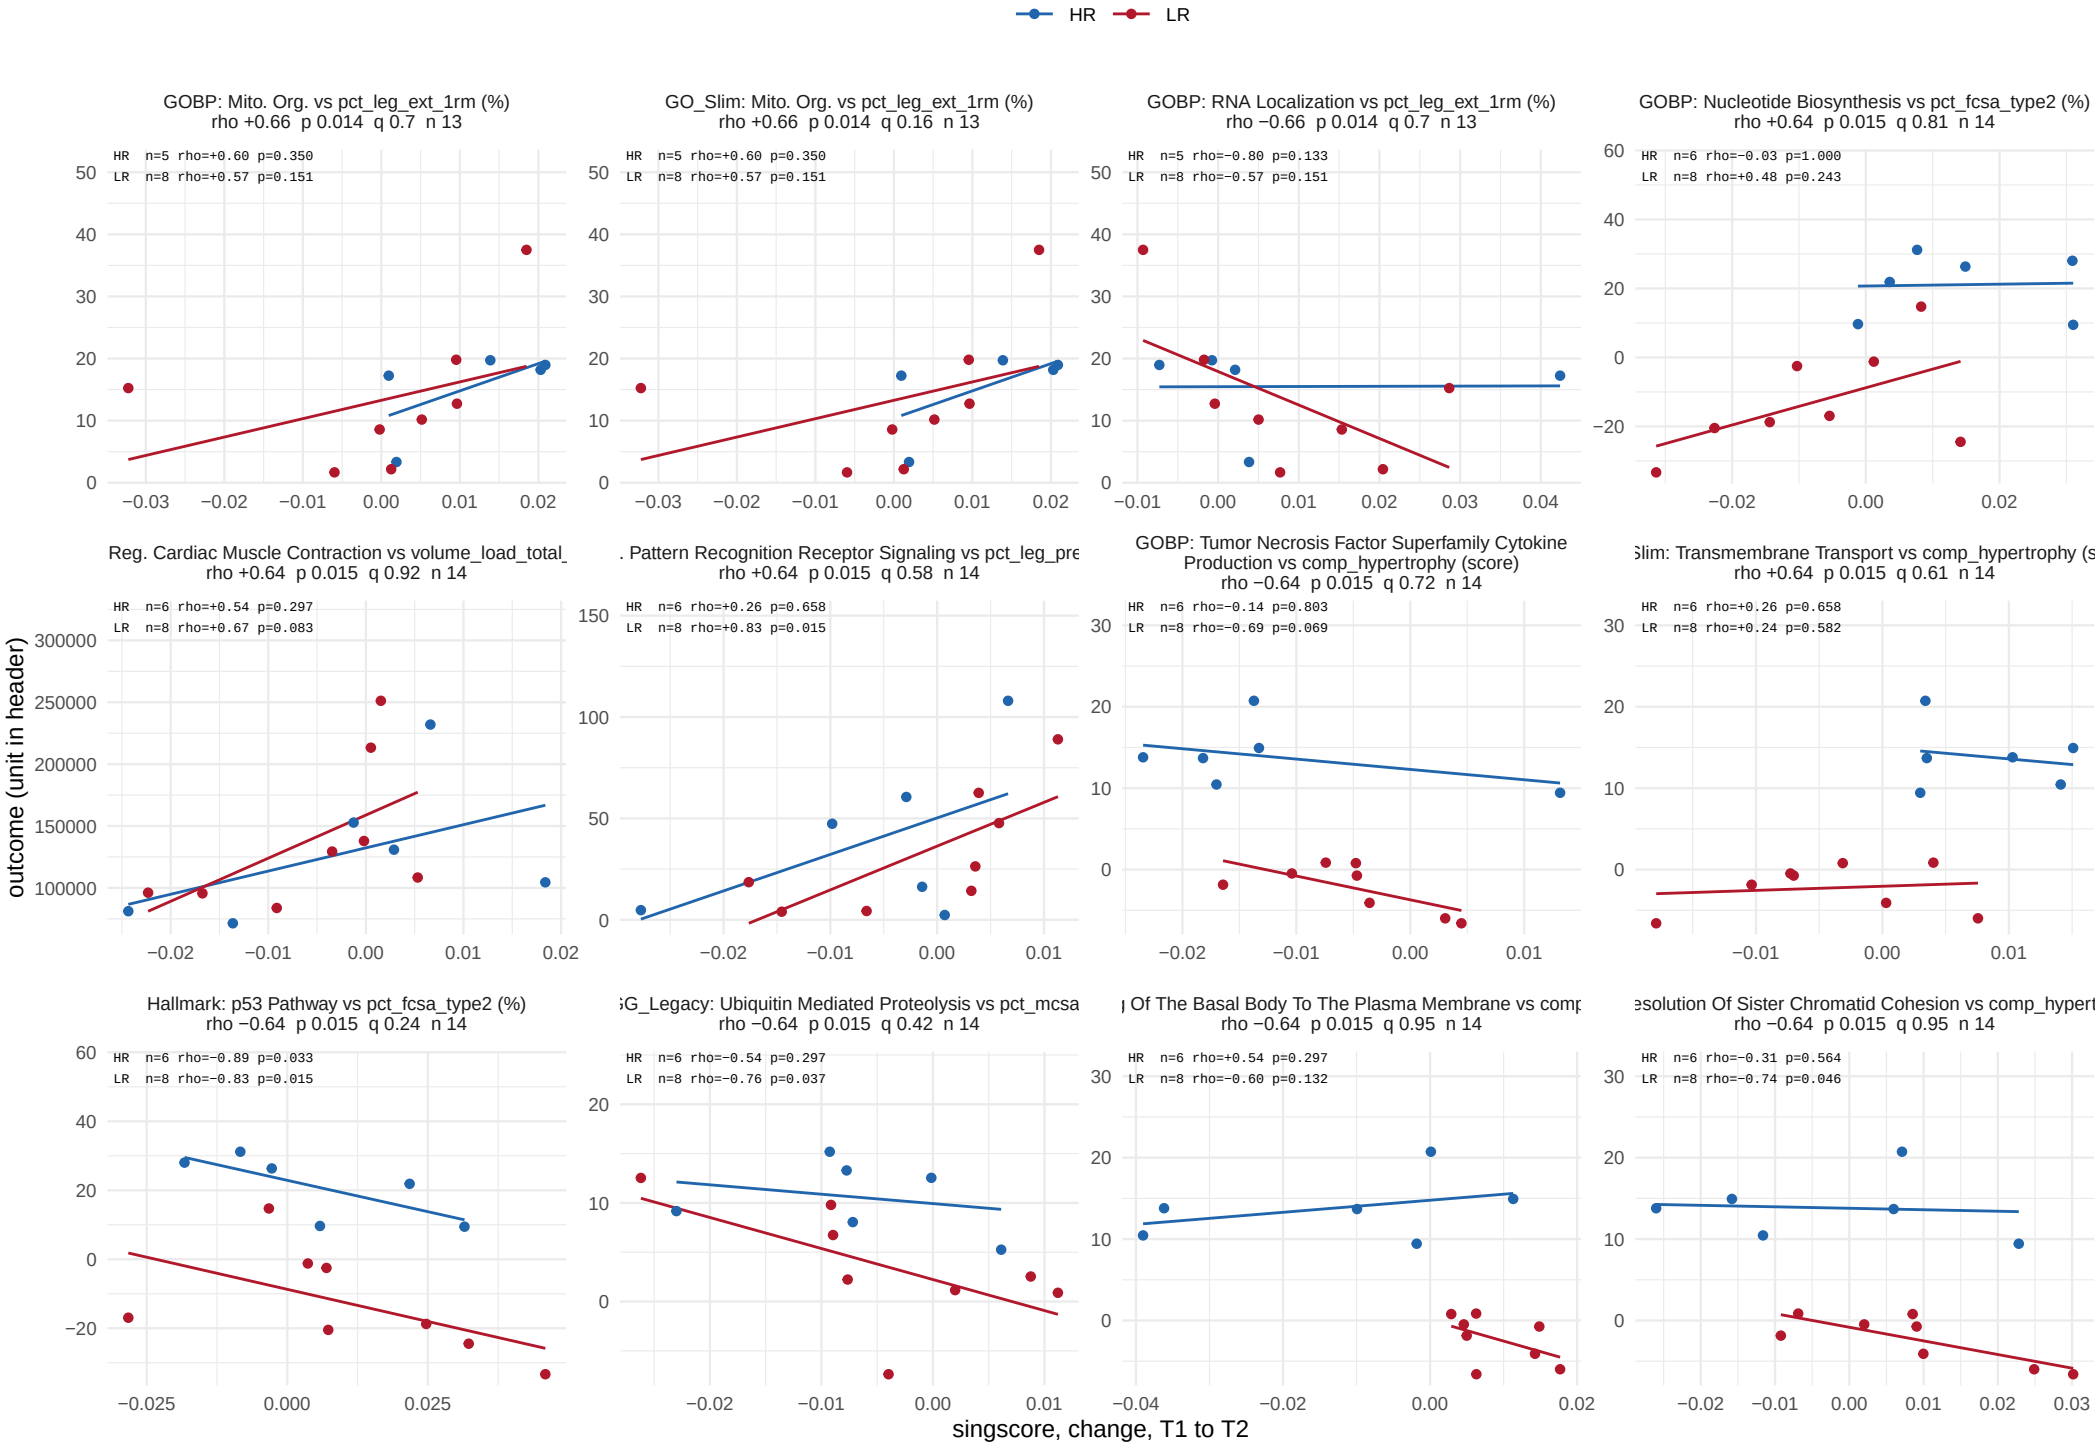


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, training window


456 of 11024 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 10 of 38.

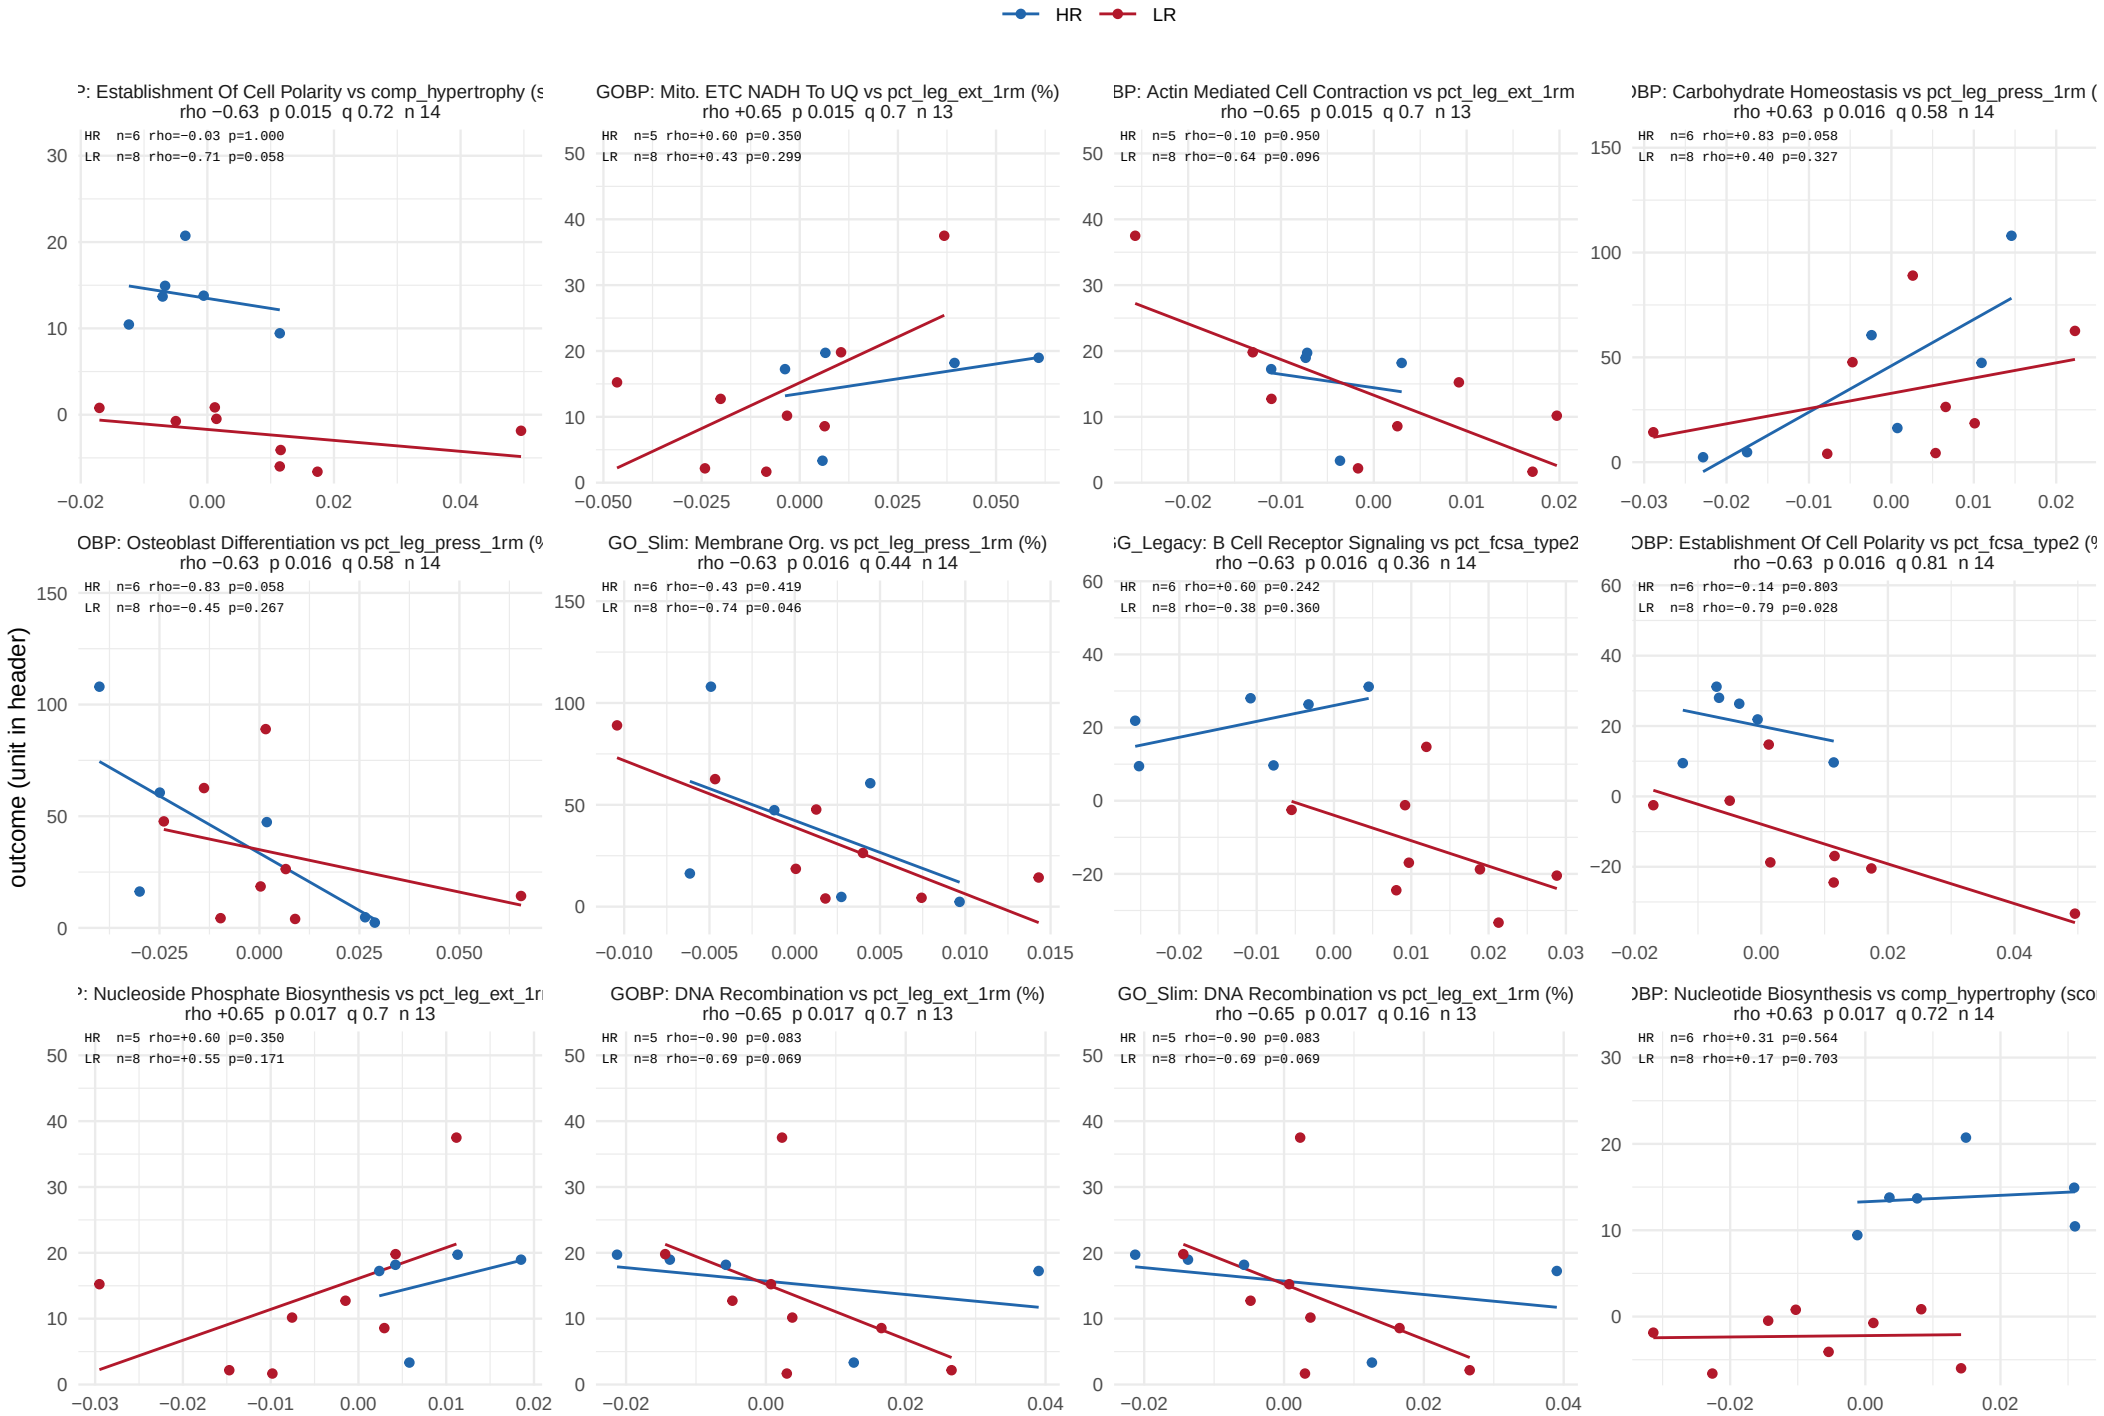


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, training window


456 of 11024 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 11 of 38.

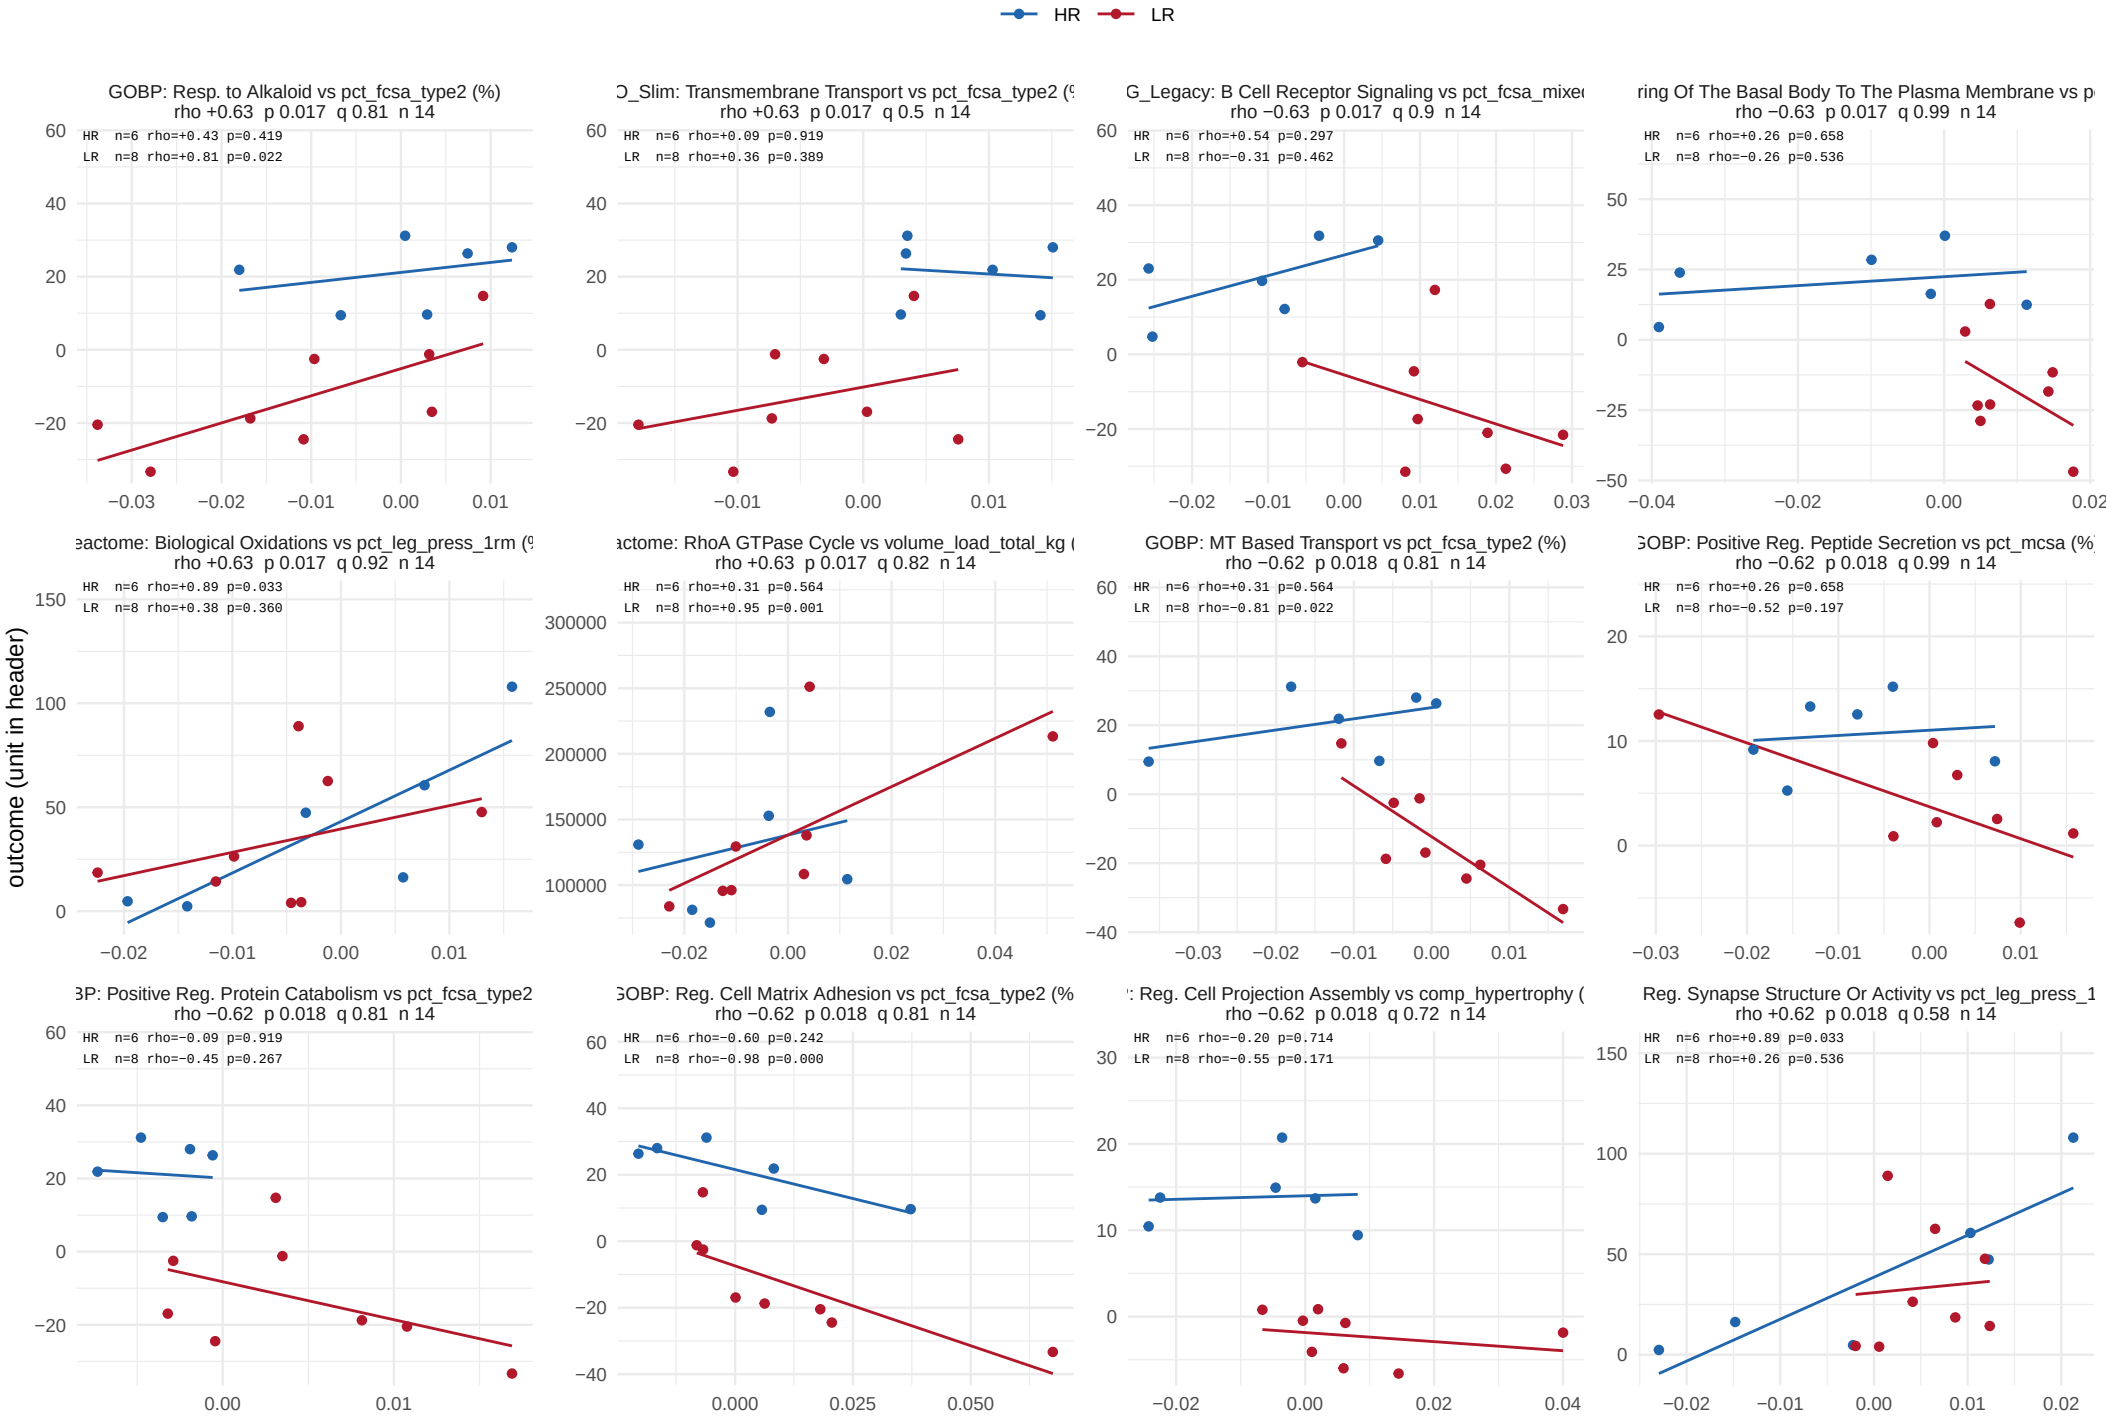


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, training window


456 of 11024 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 12 of 38.

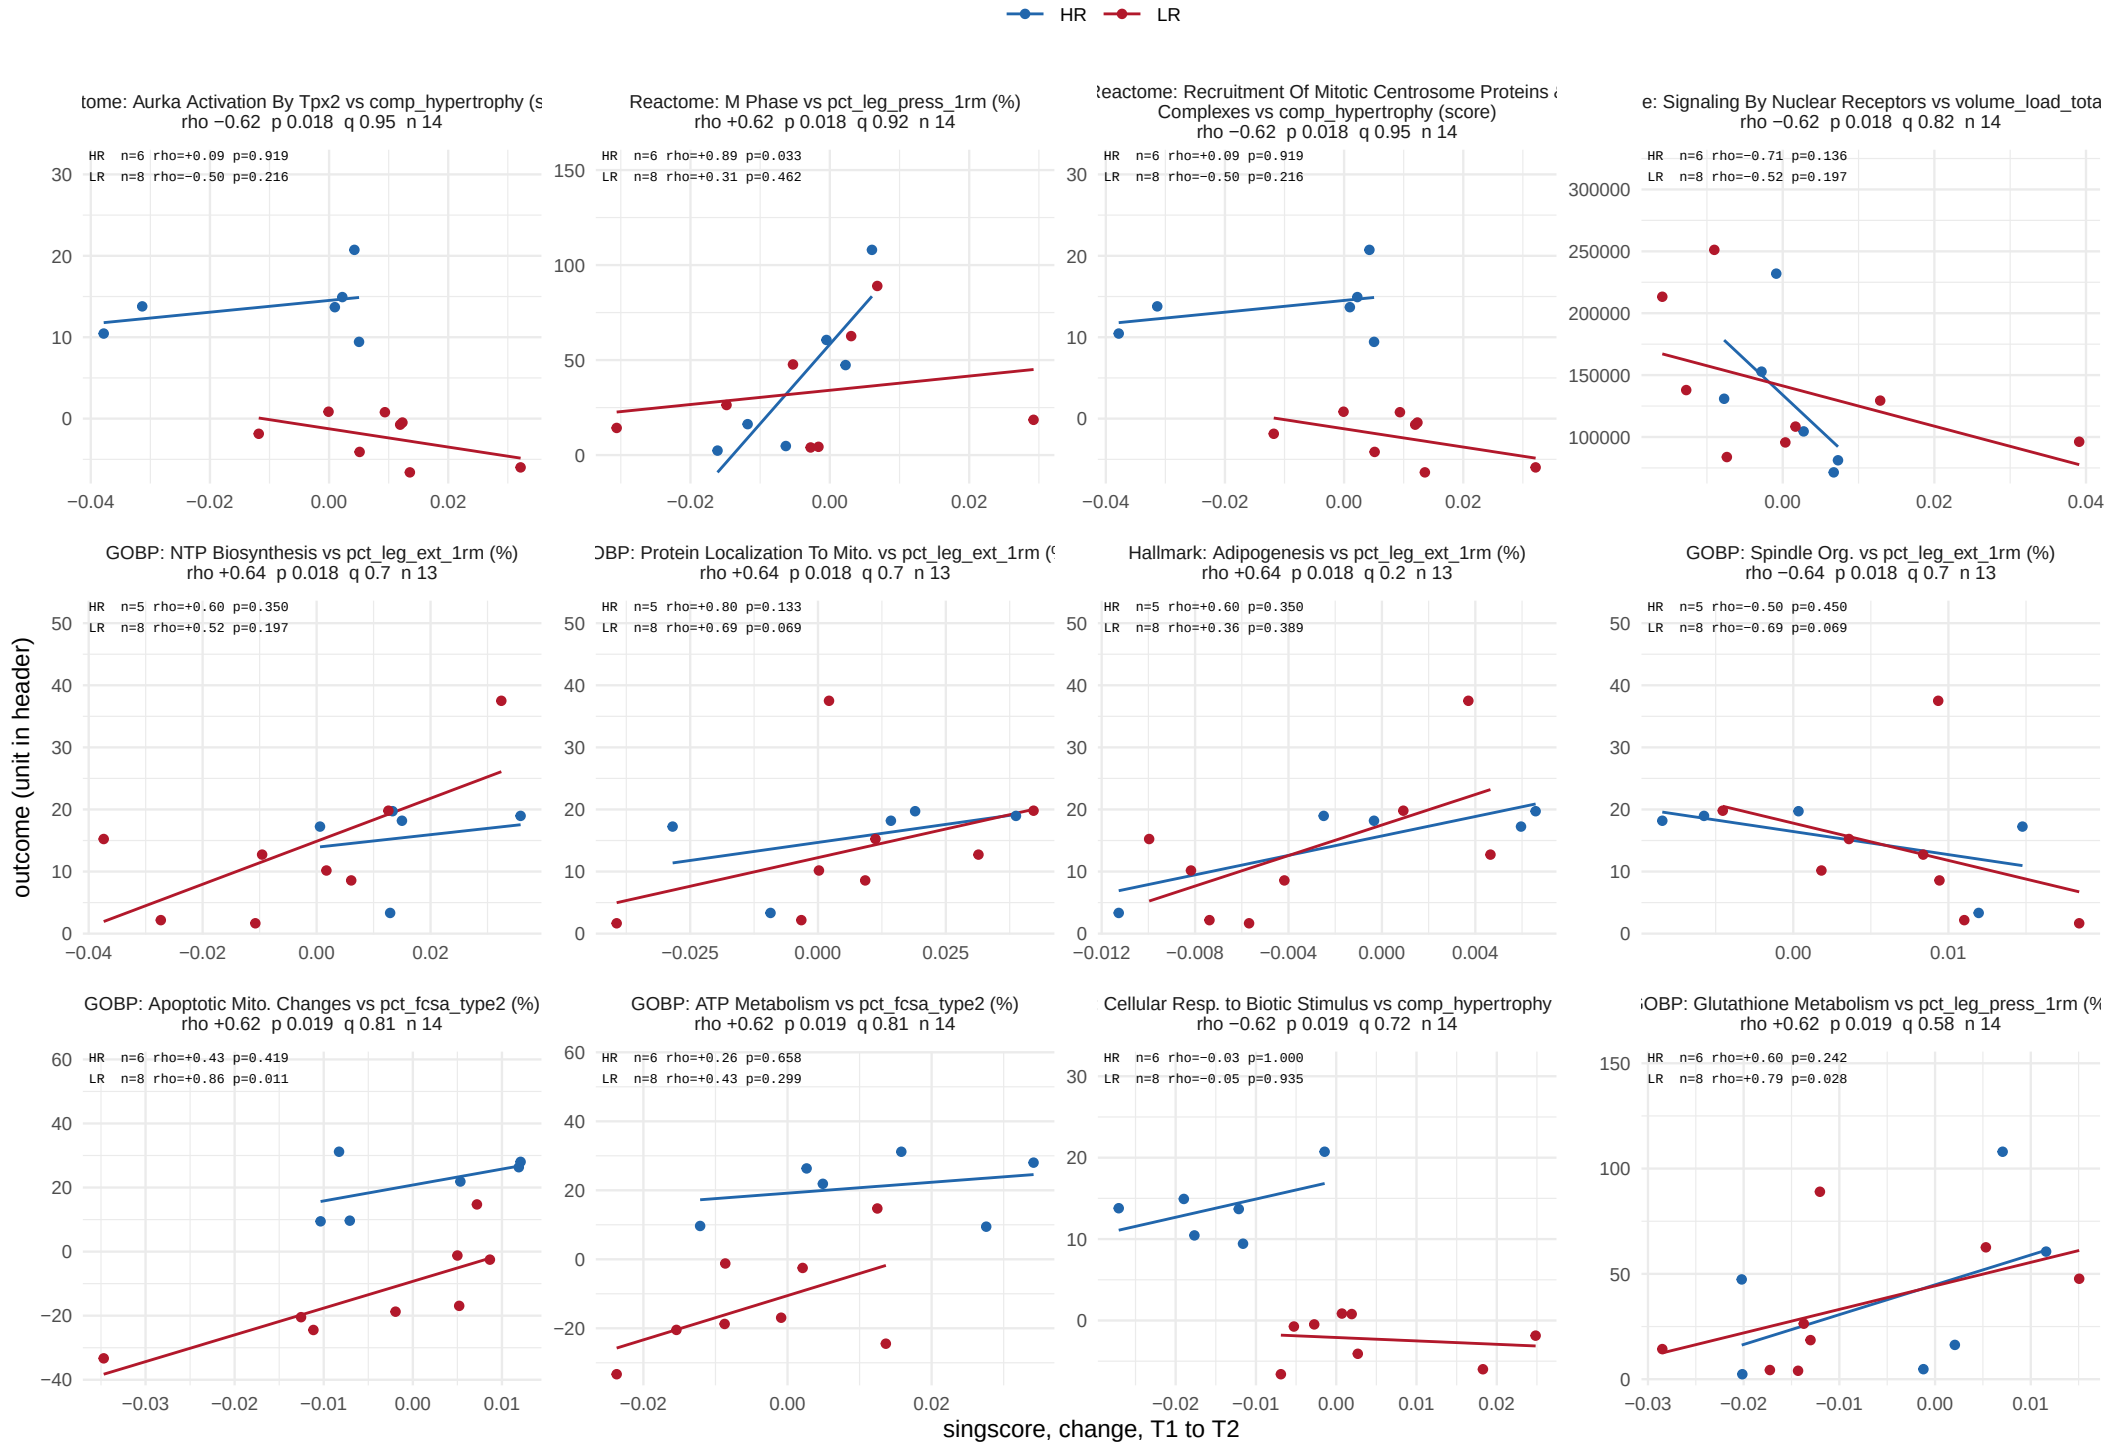


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, training window


456 of 11024 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 13 of 38.

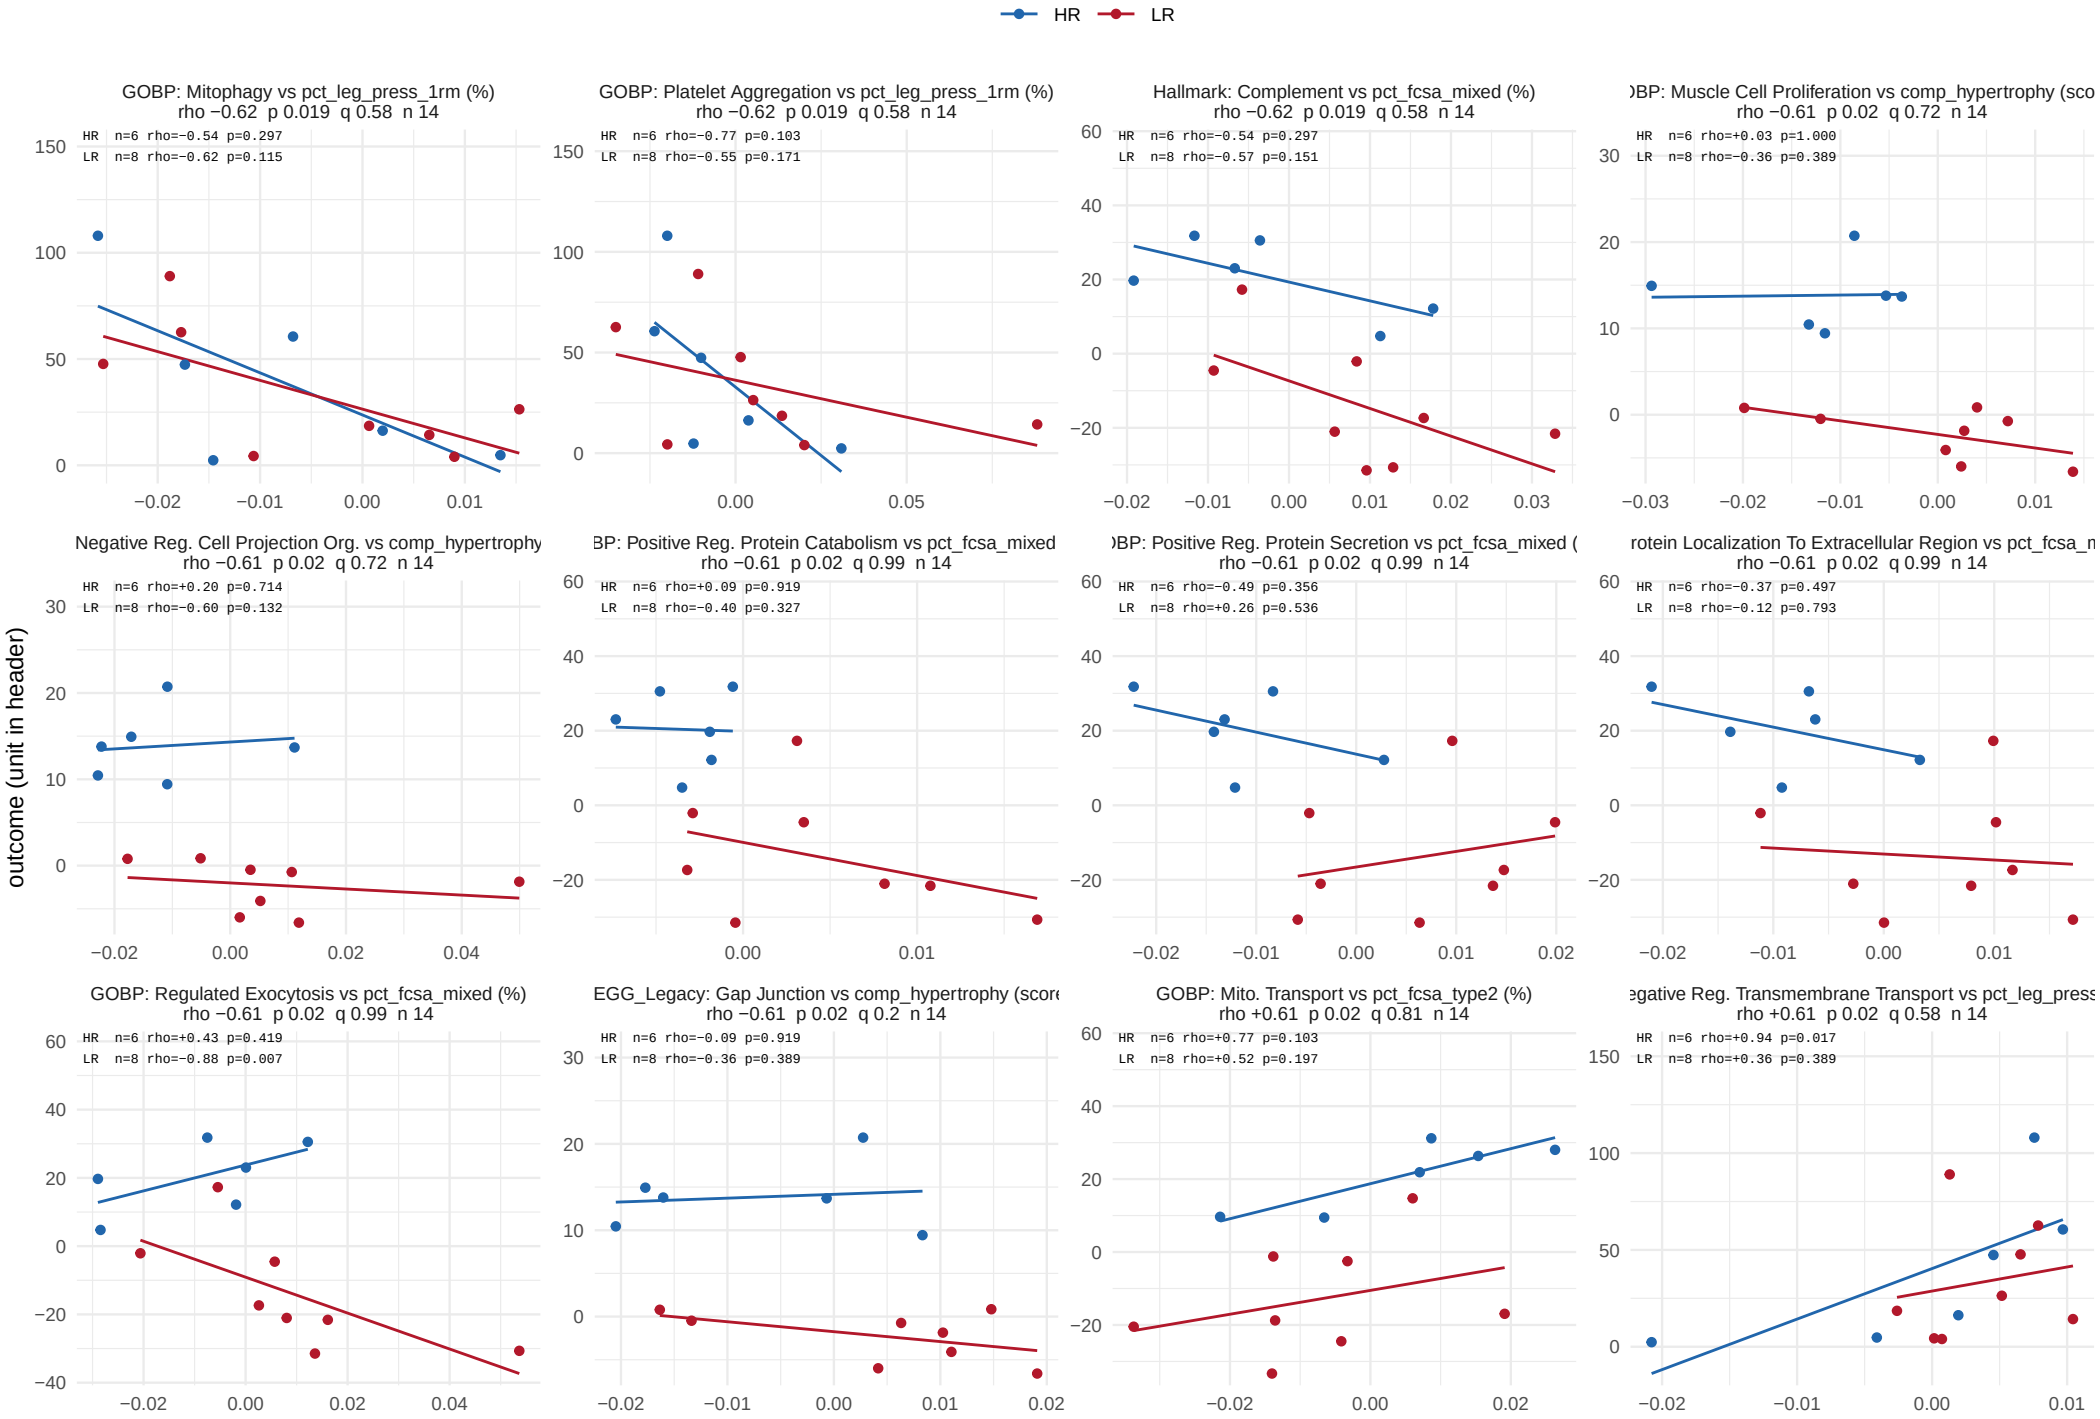


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, training window


456 of 11024 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 14 of 38.

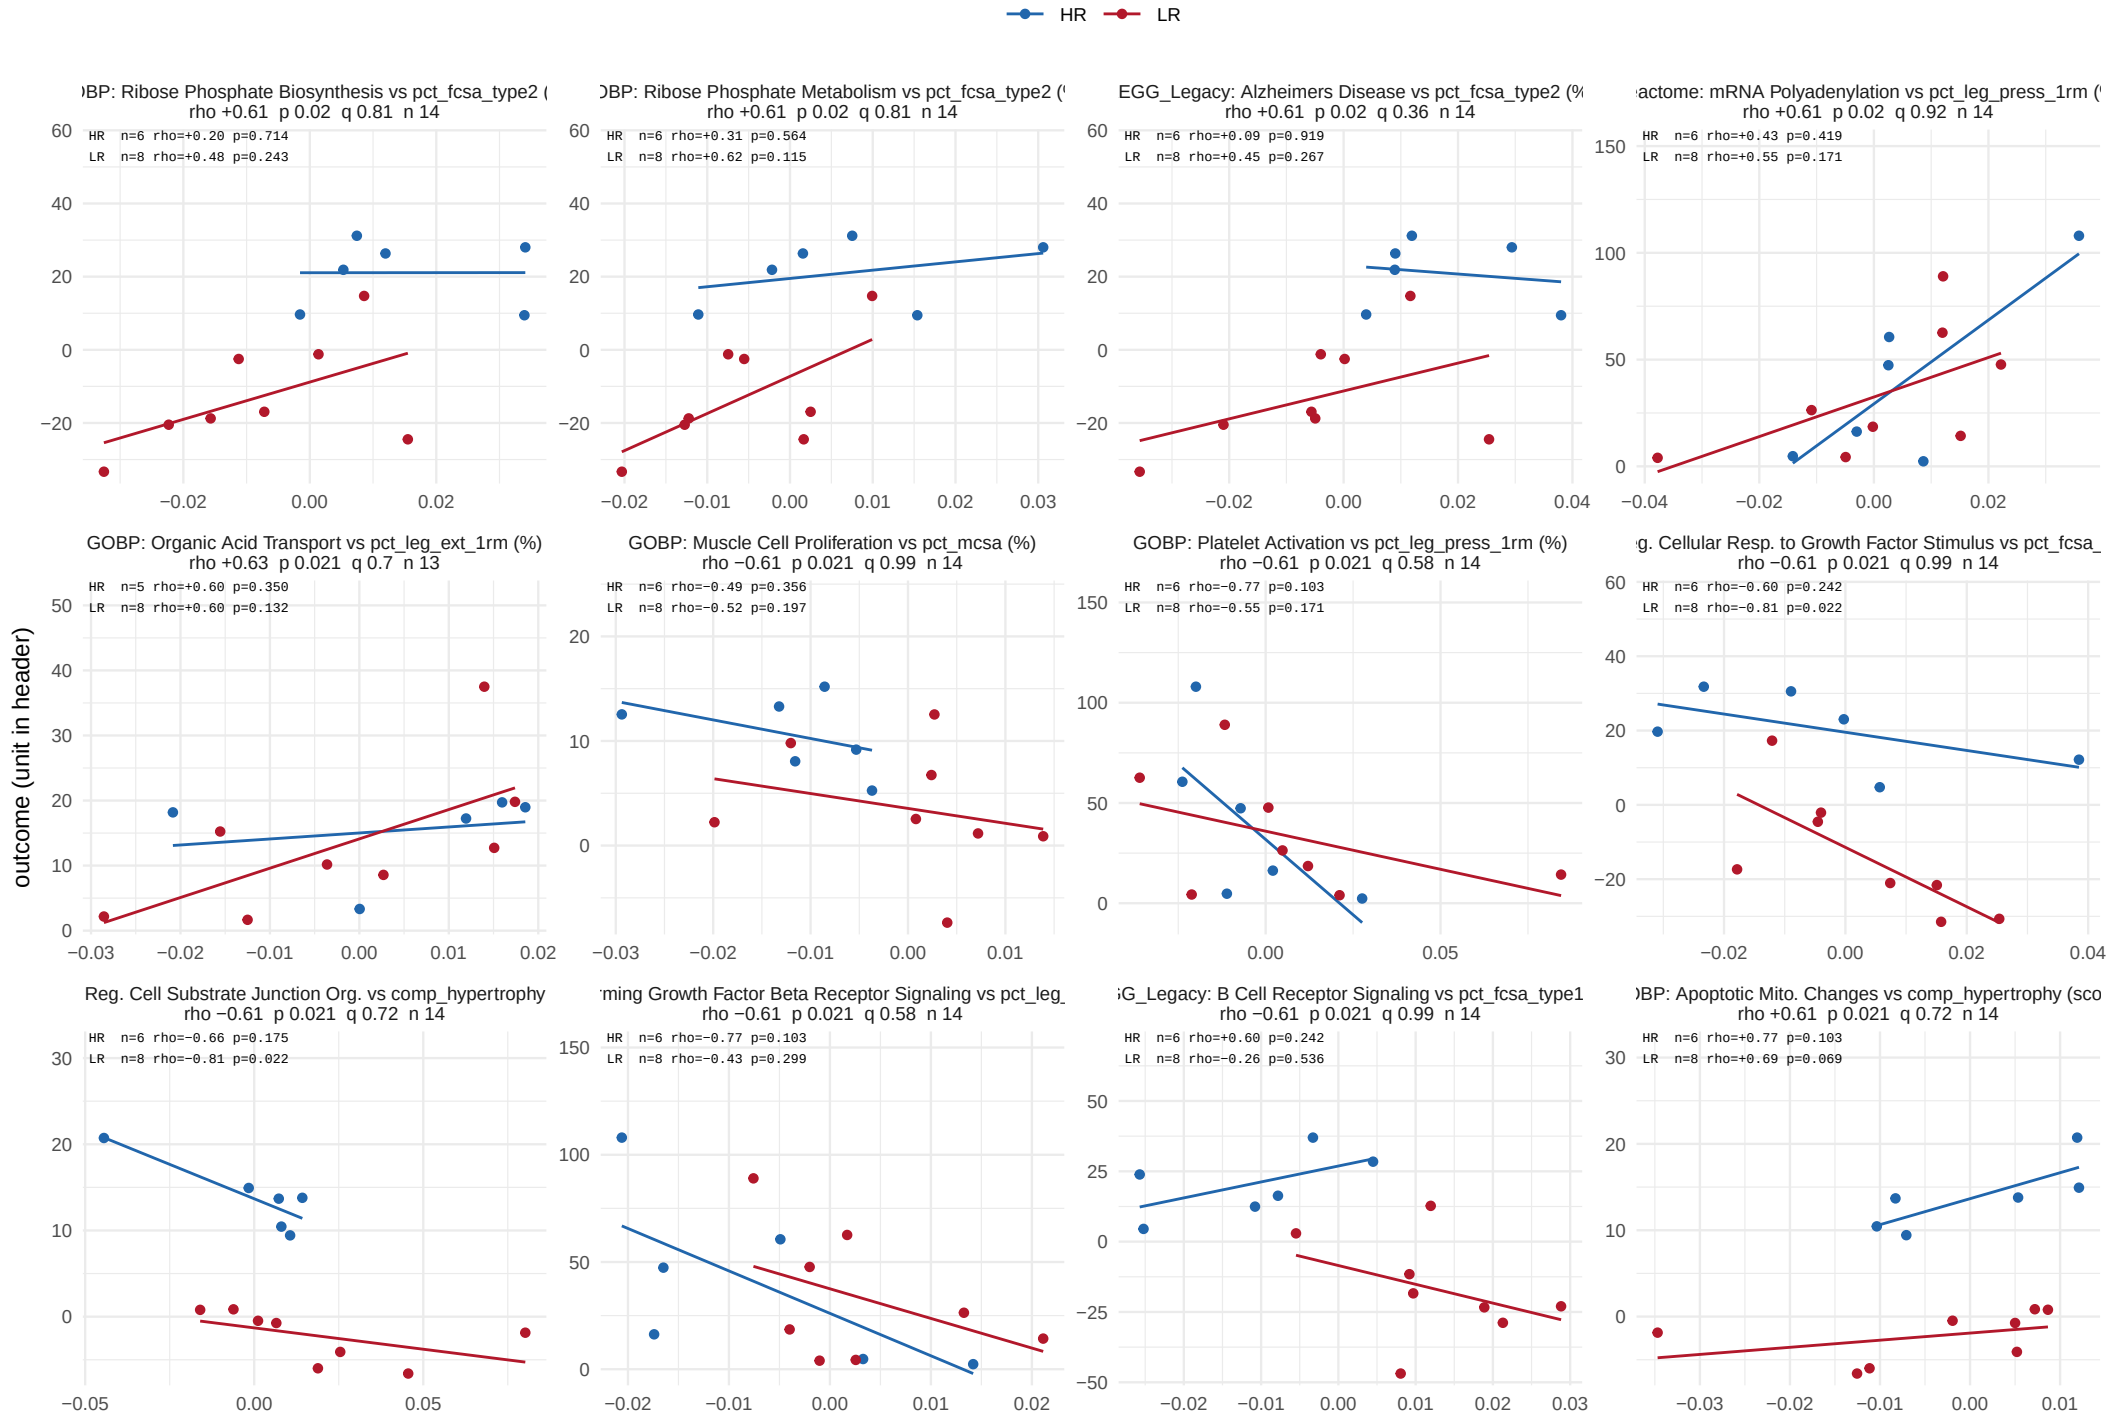


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, training window


456 of 11024 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 15 of 38.

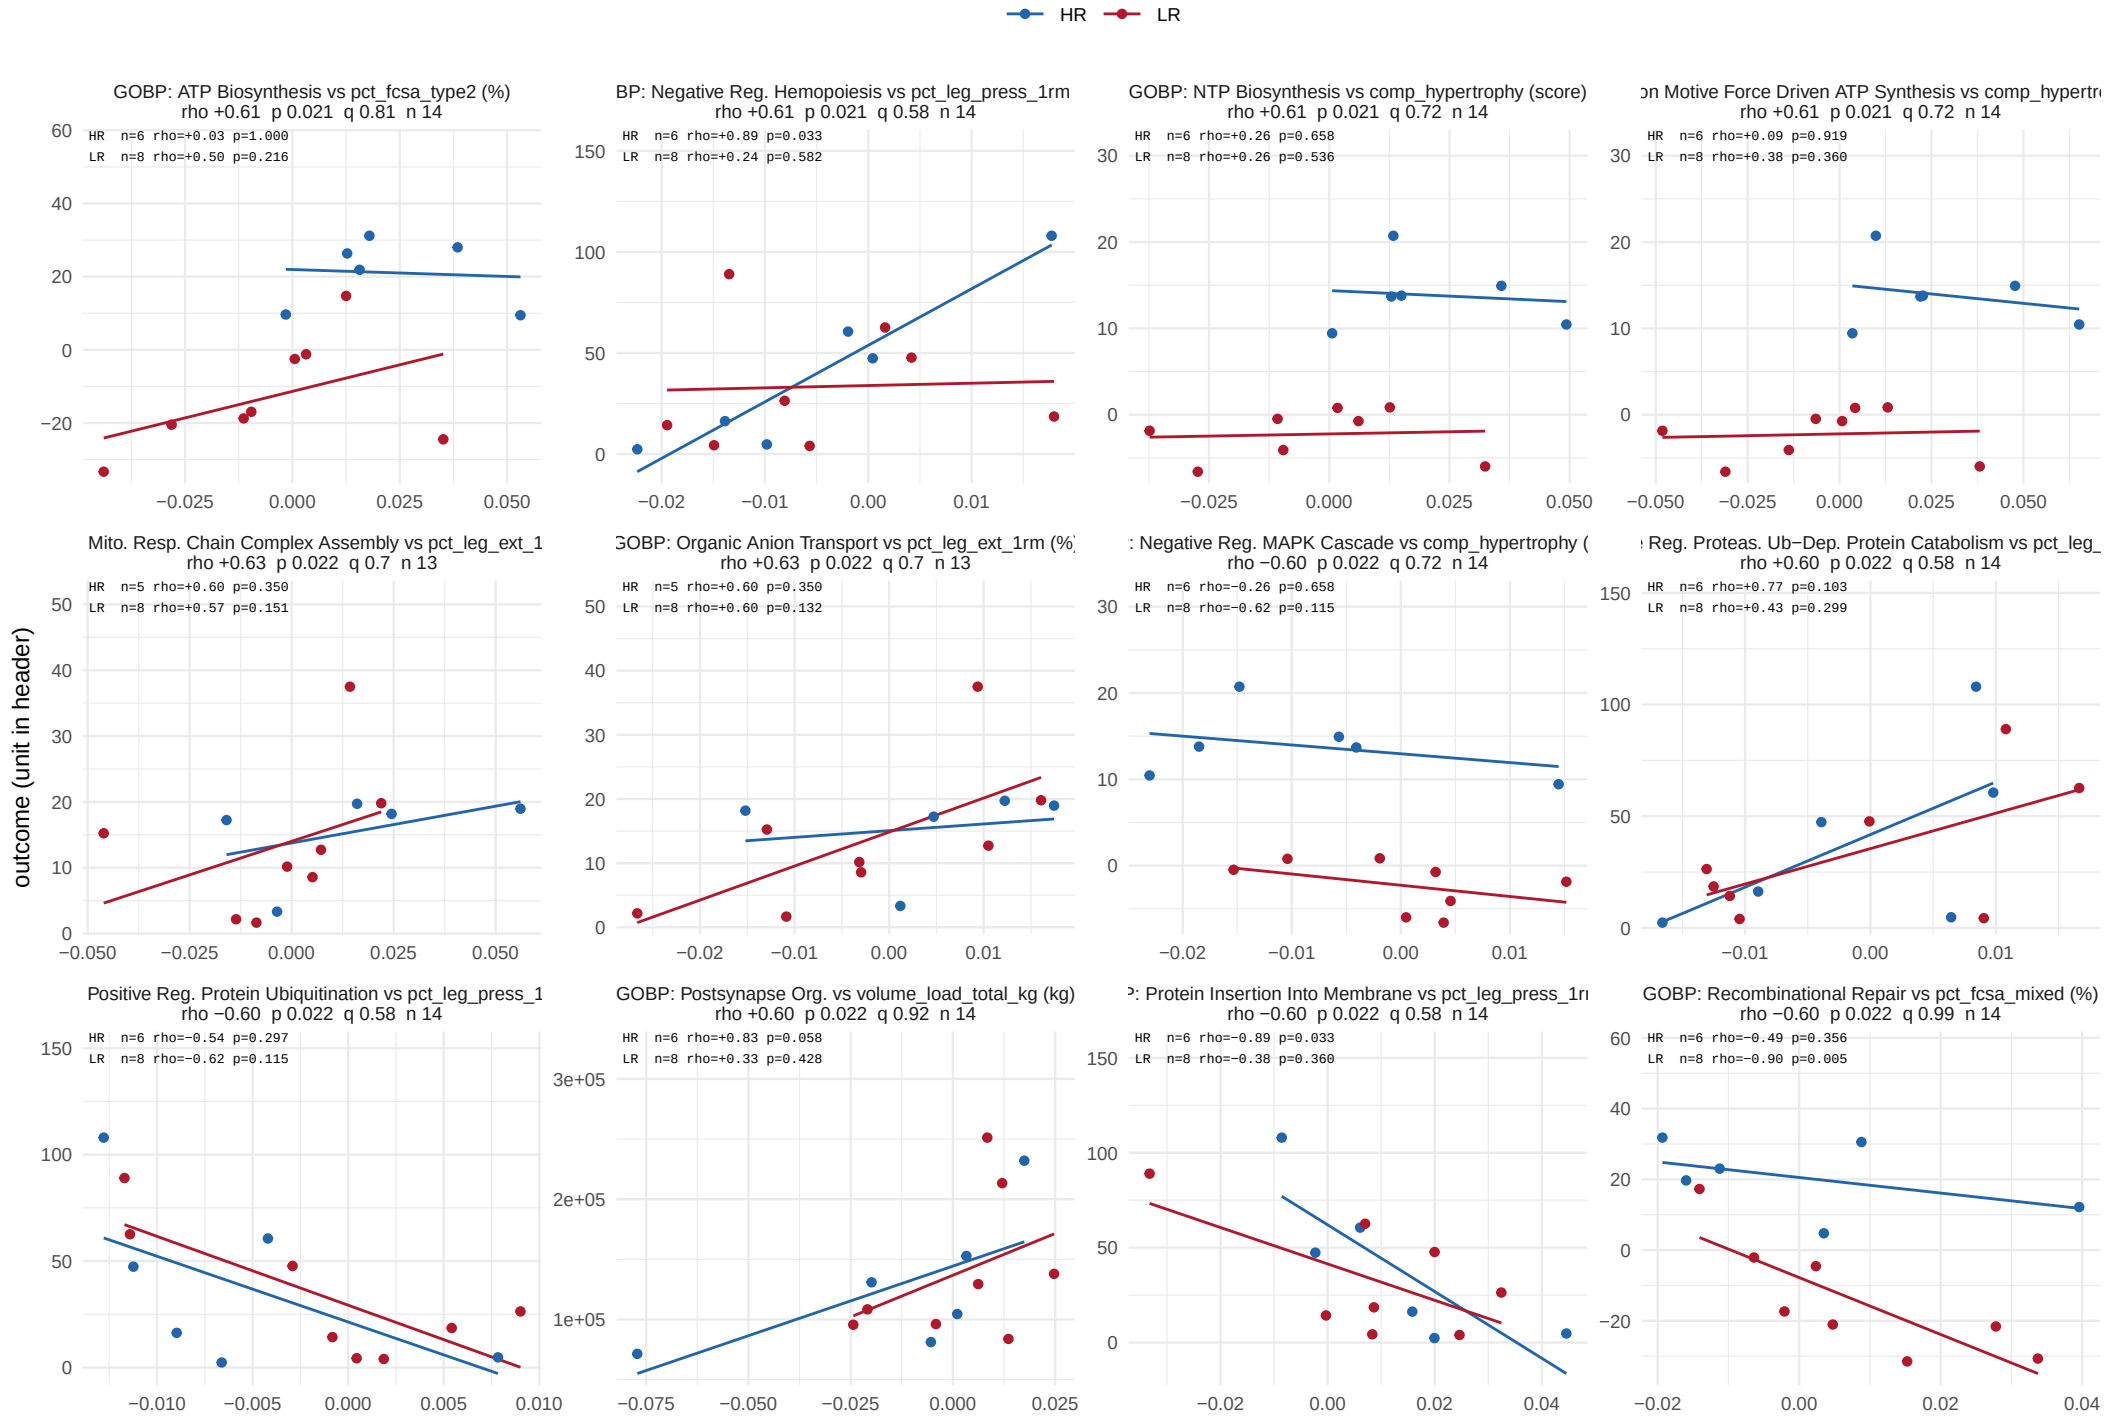


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, training window


456 of 11024 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 16 of 38.

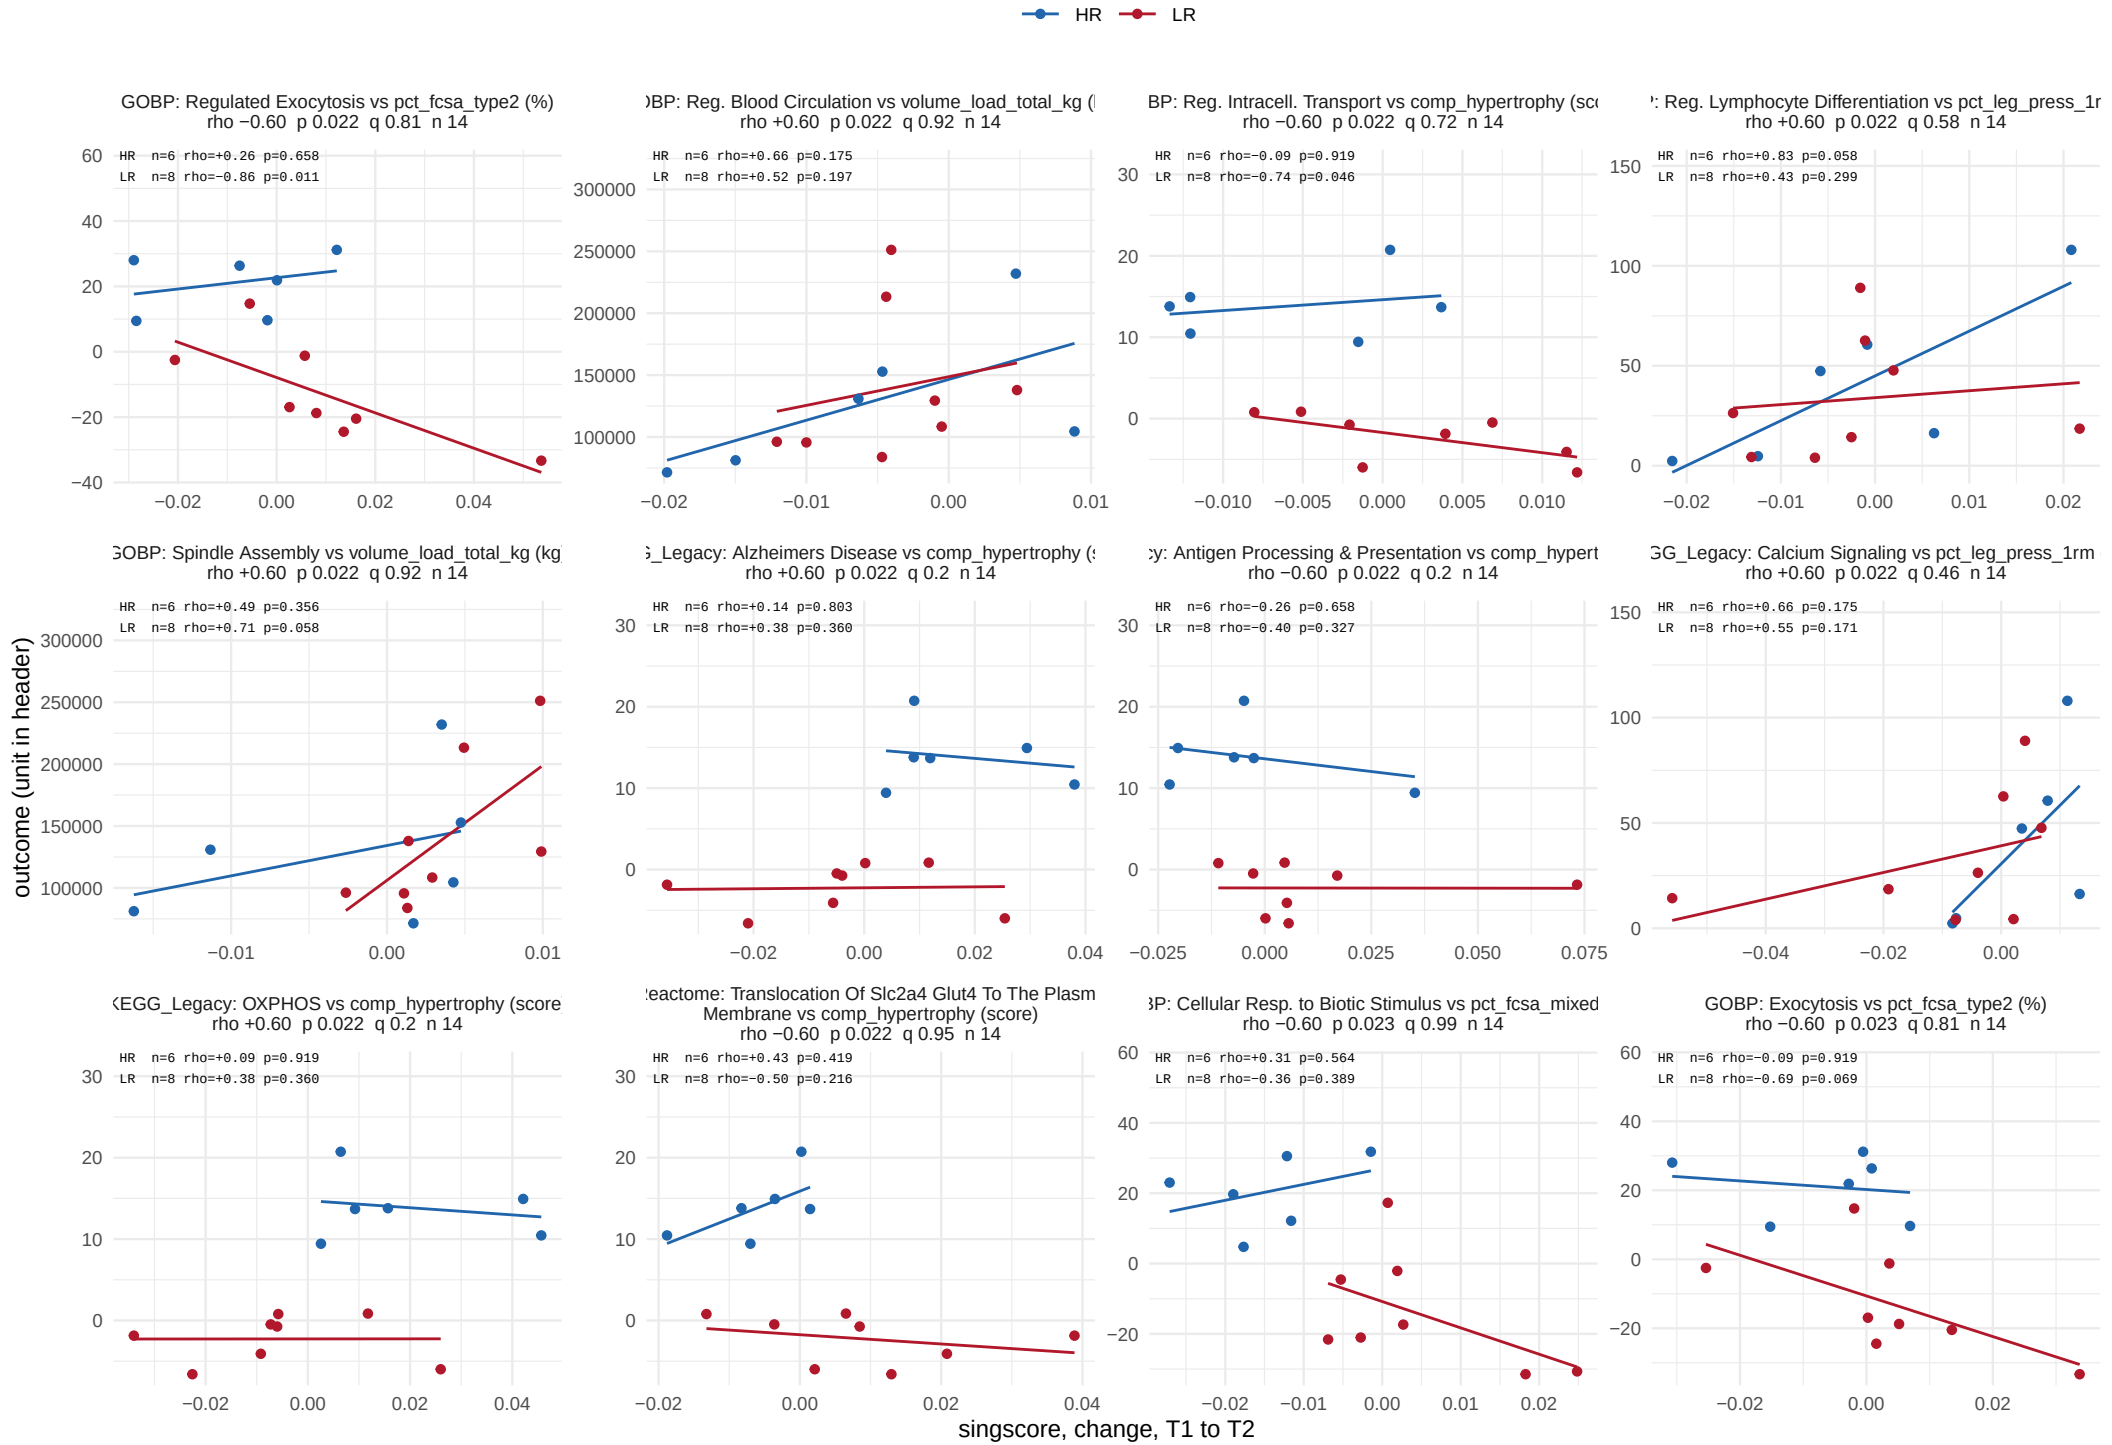


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, training window


456 of 11024 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 17 of 38.

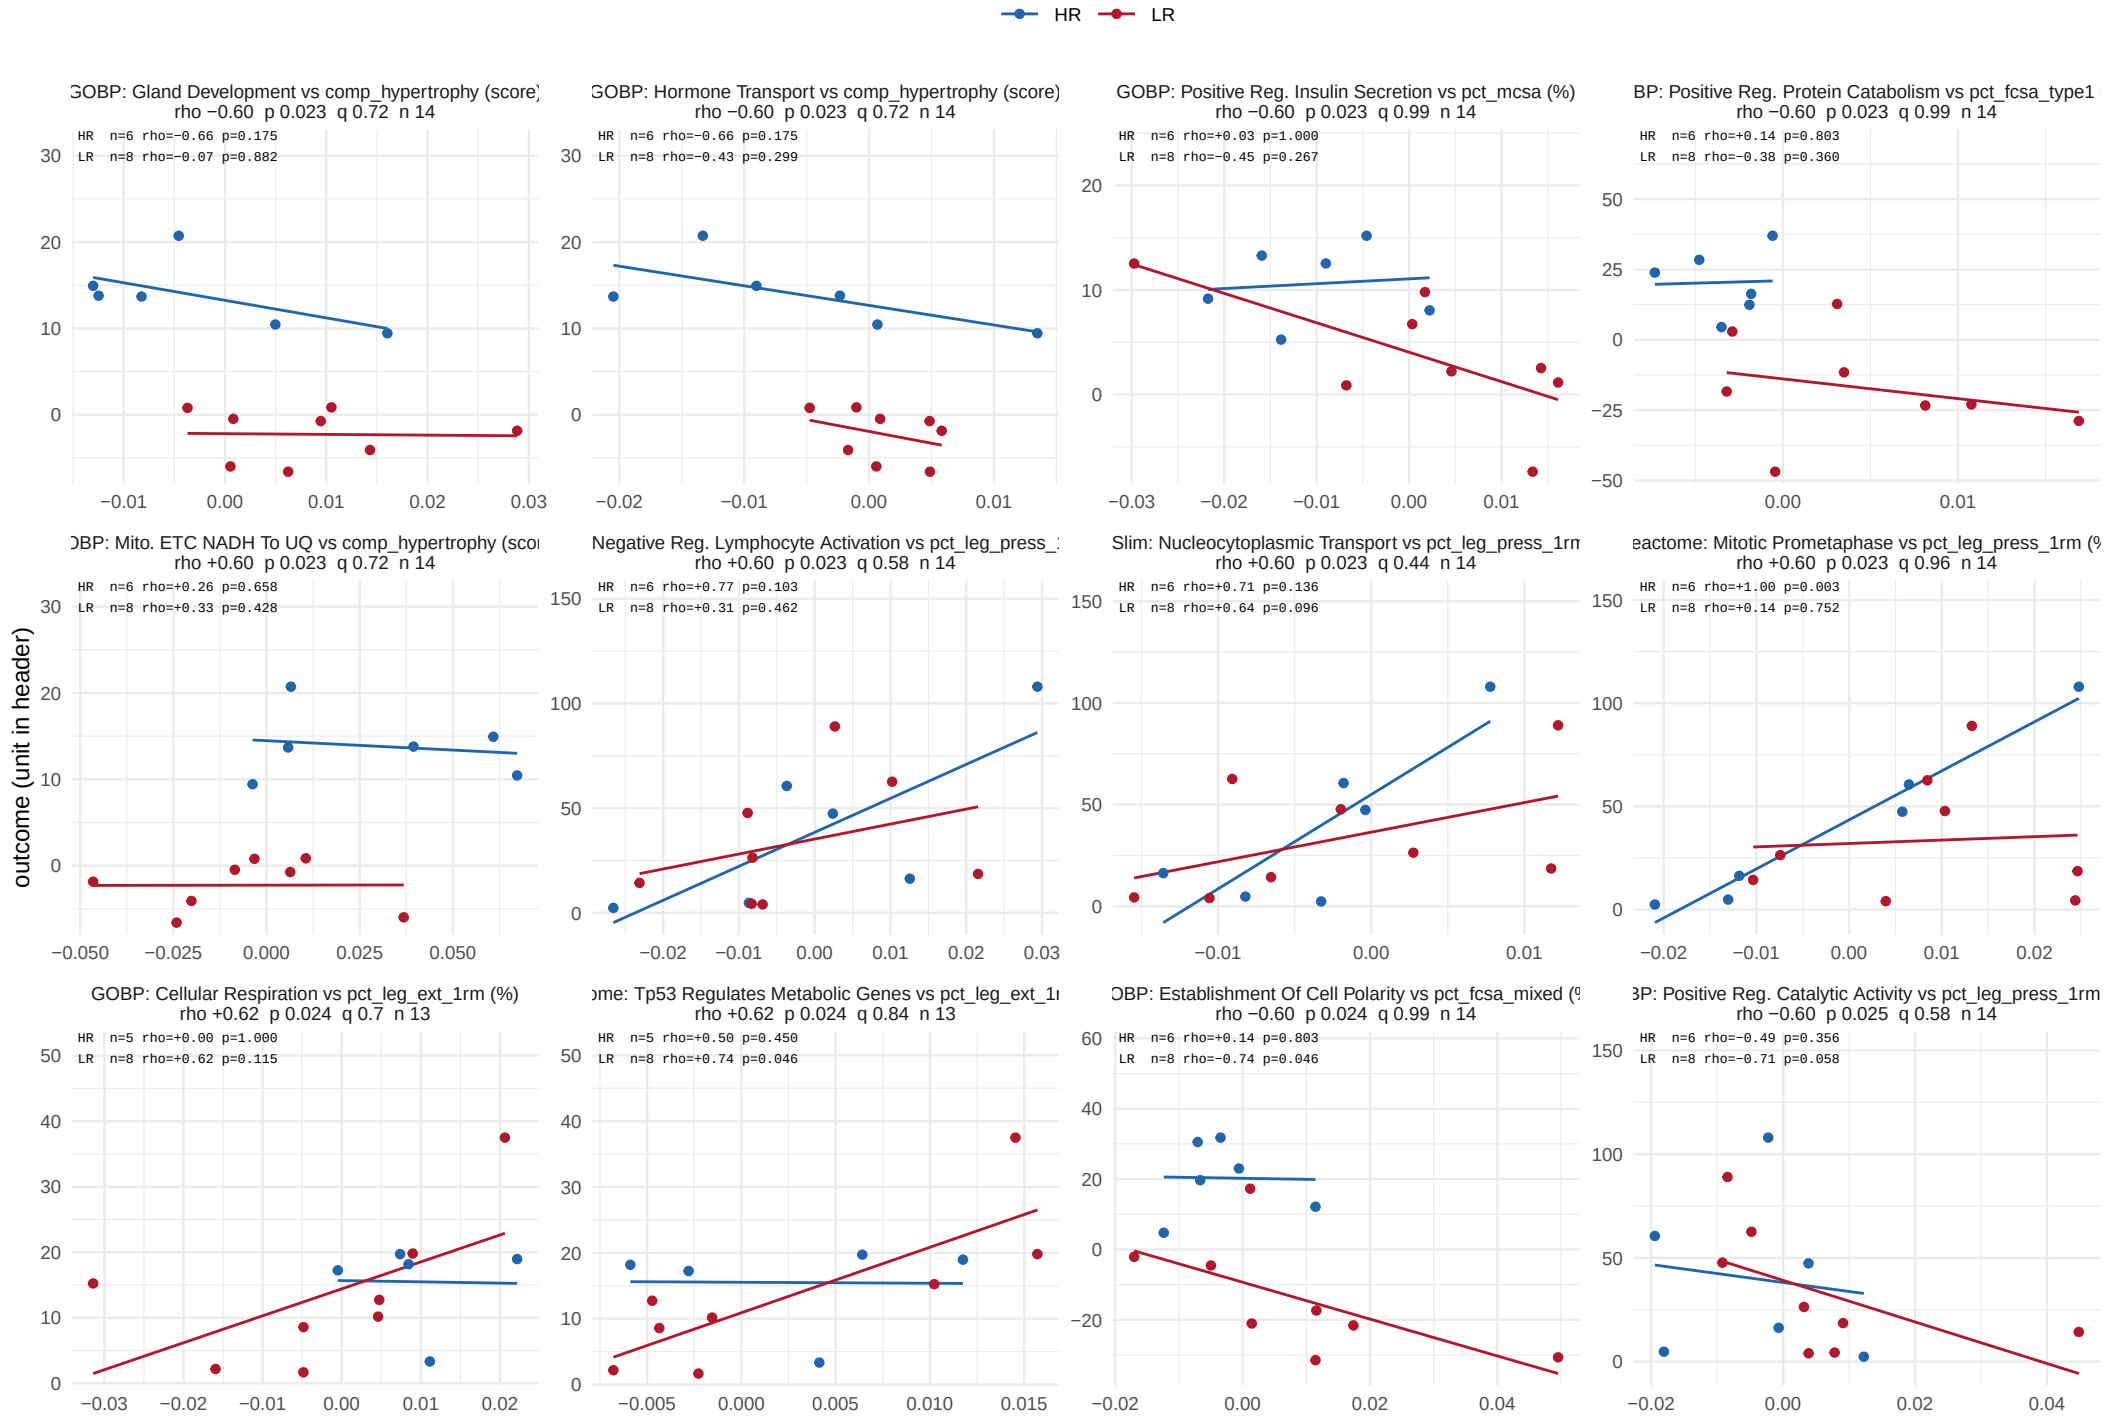


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, training window


456 of 11024 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 18 of 38.

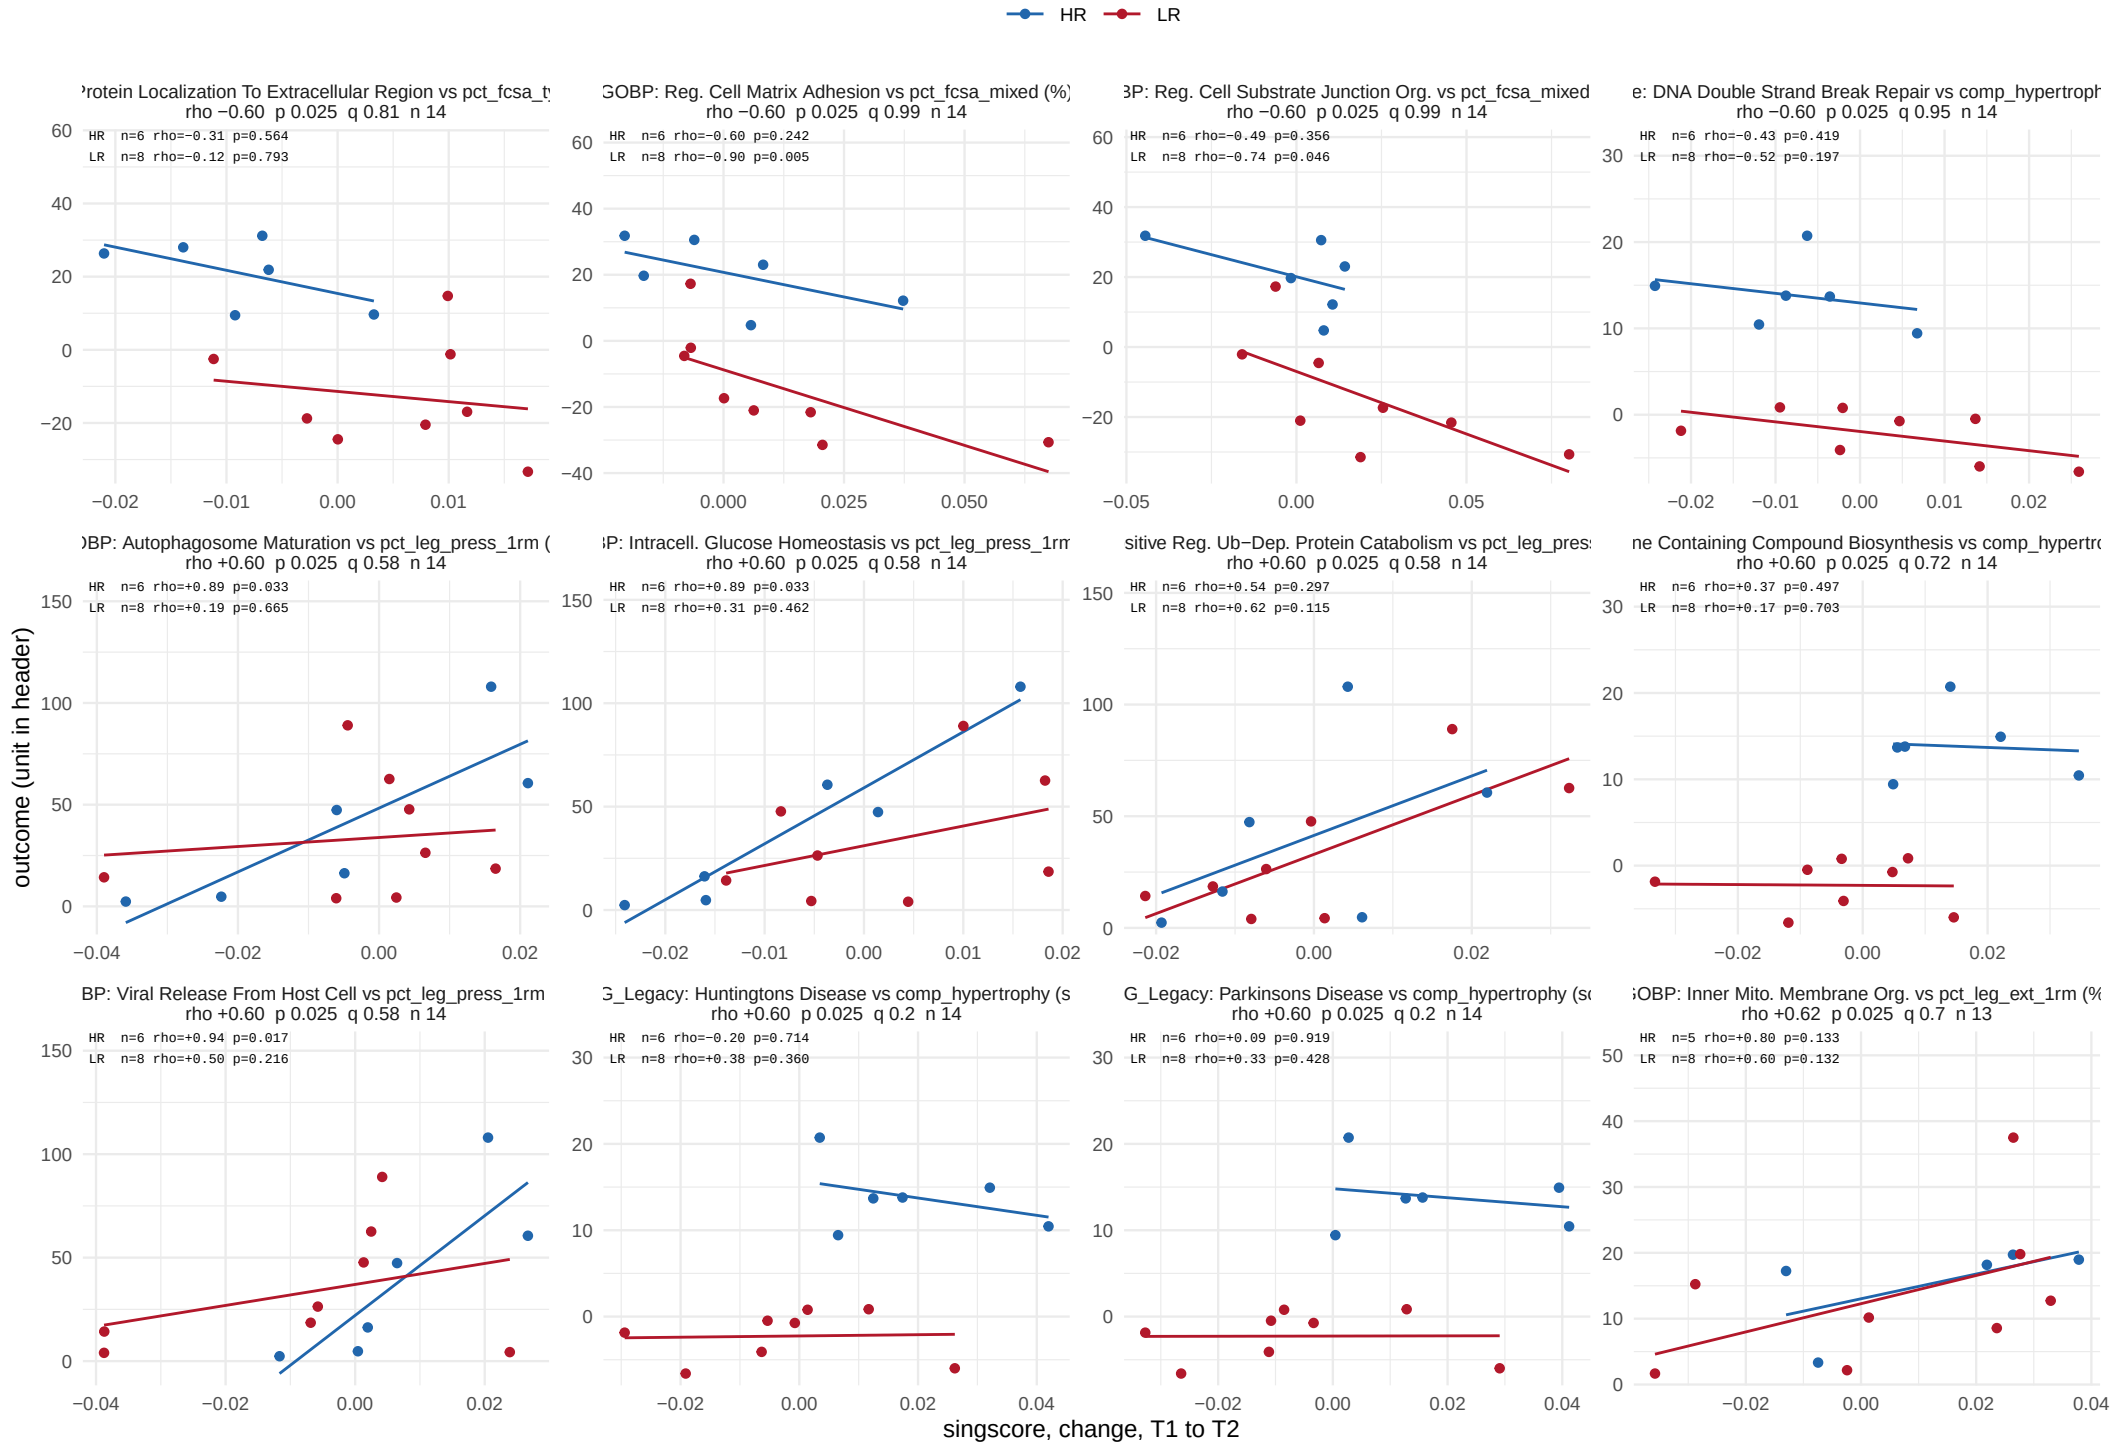


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, training window


456 of 11024 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 19 of 38.

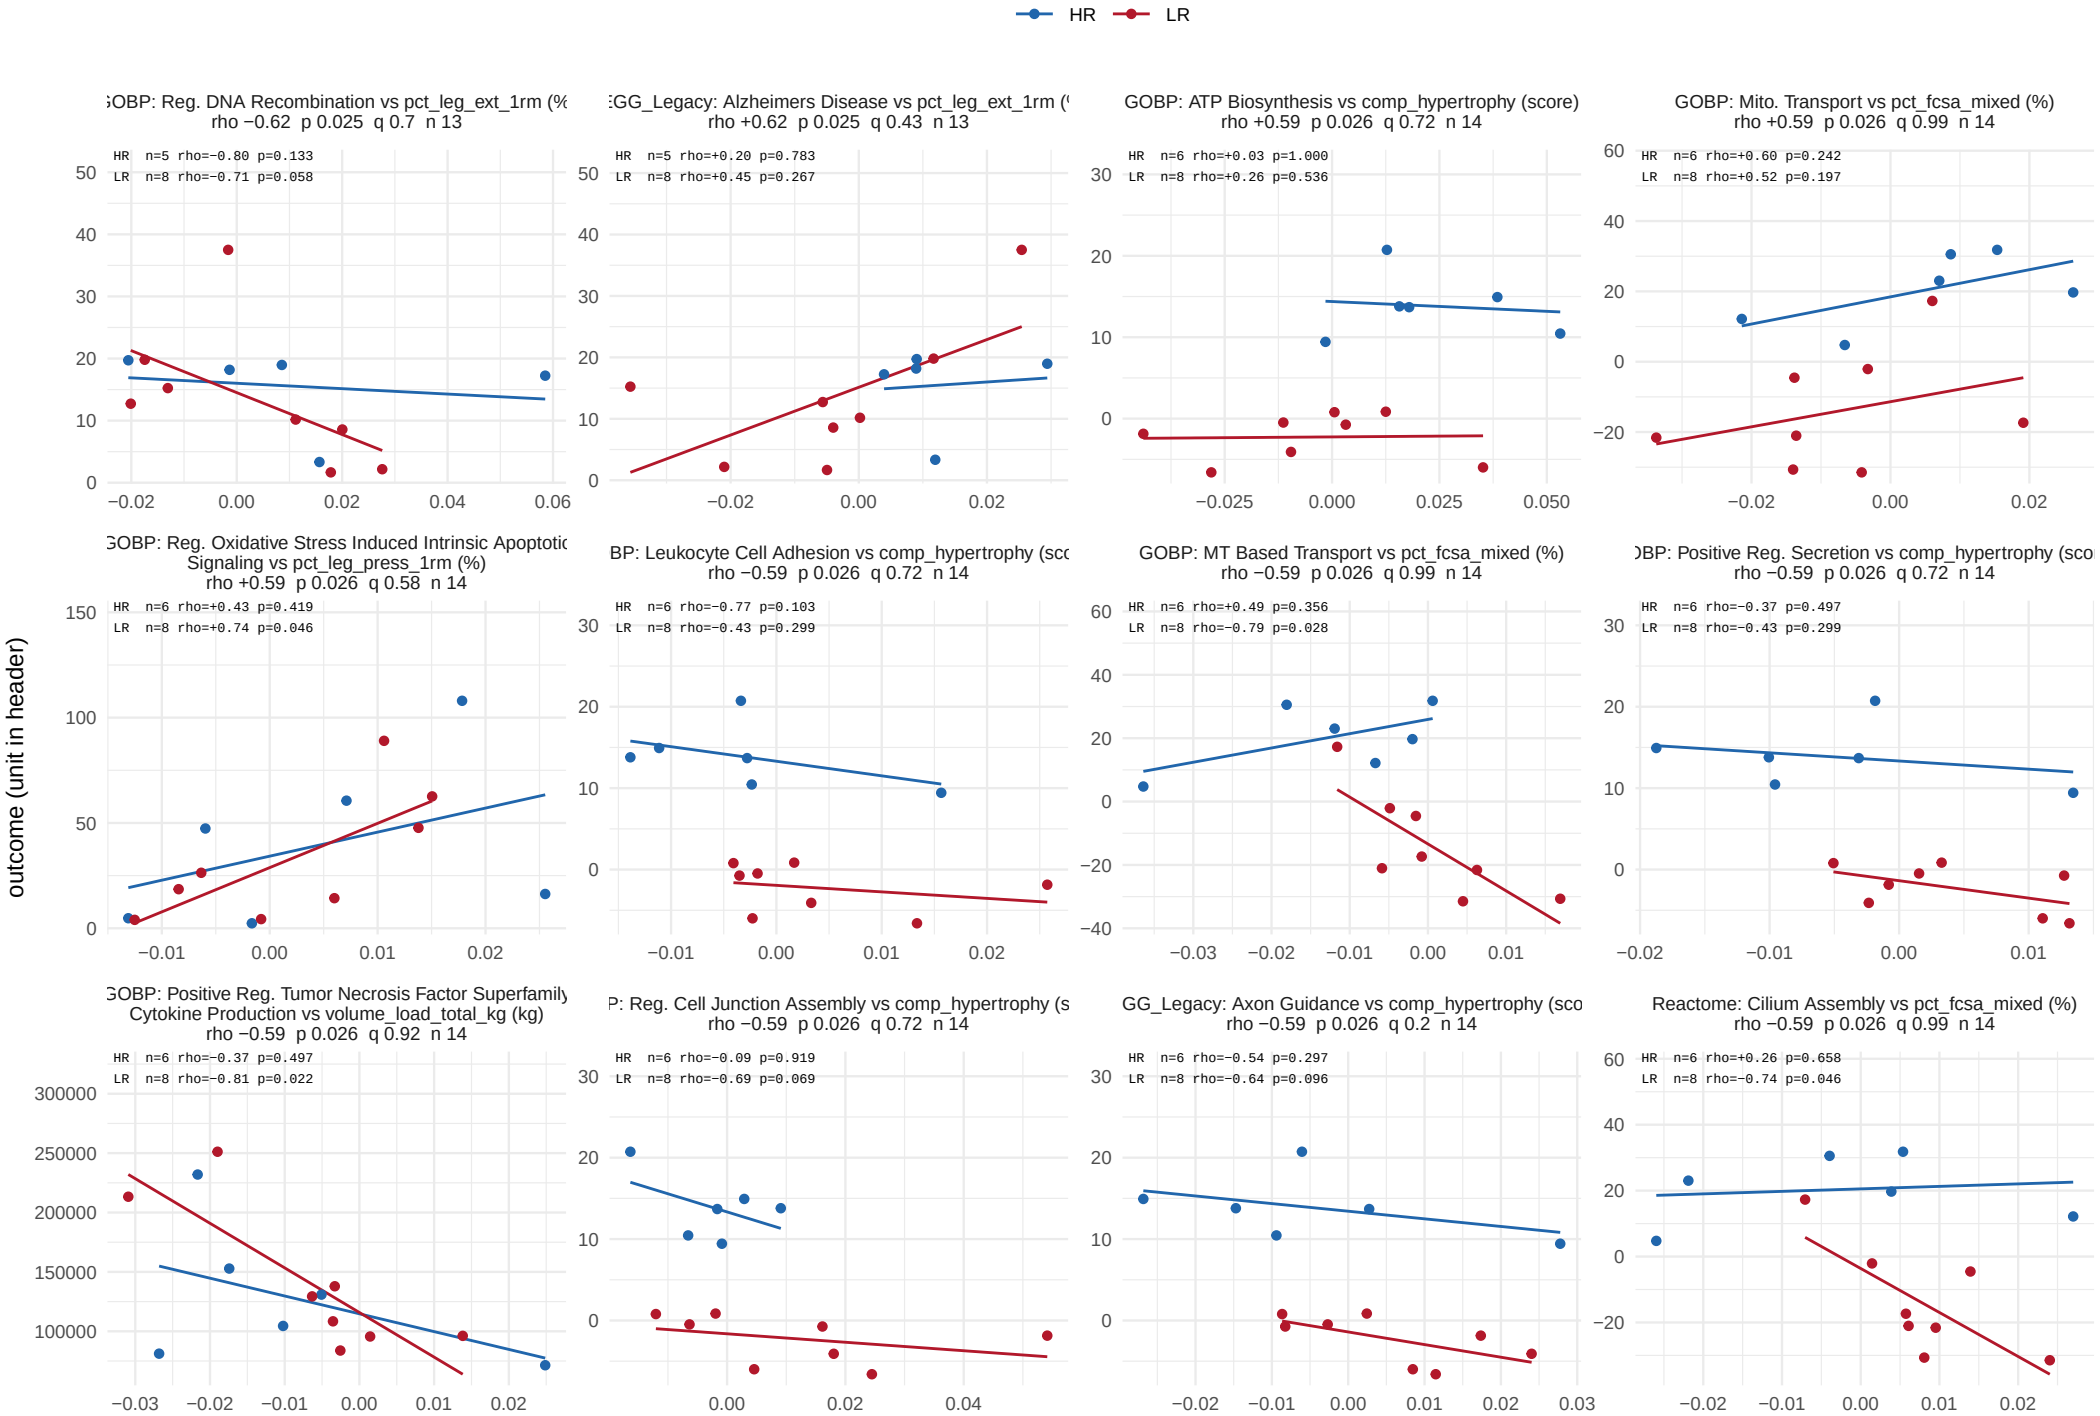


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, training window


456 of 11024 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 20 of 38.

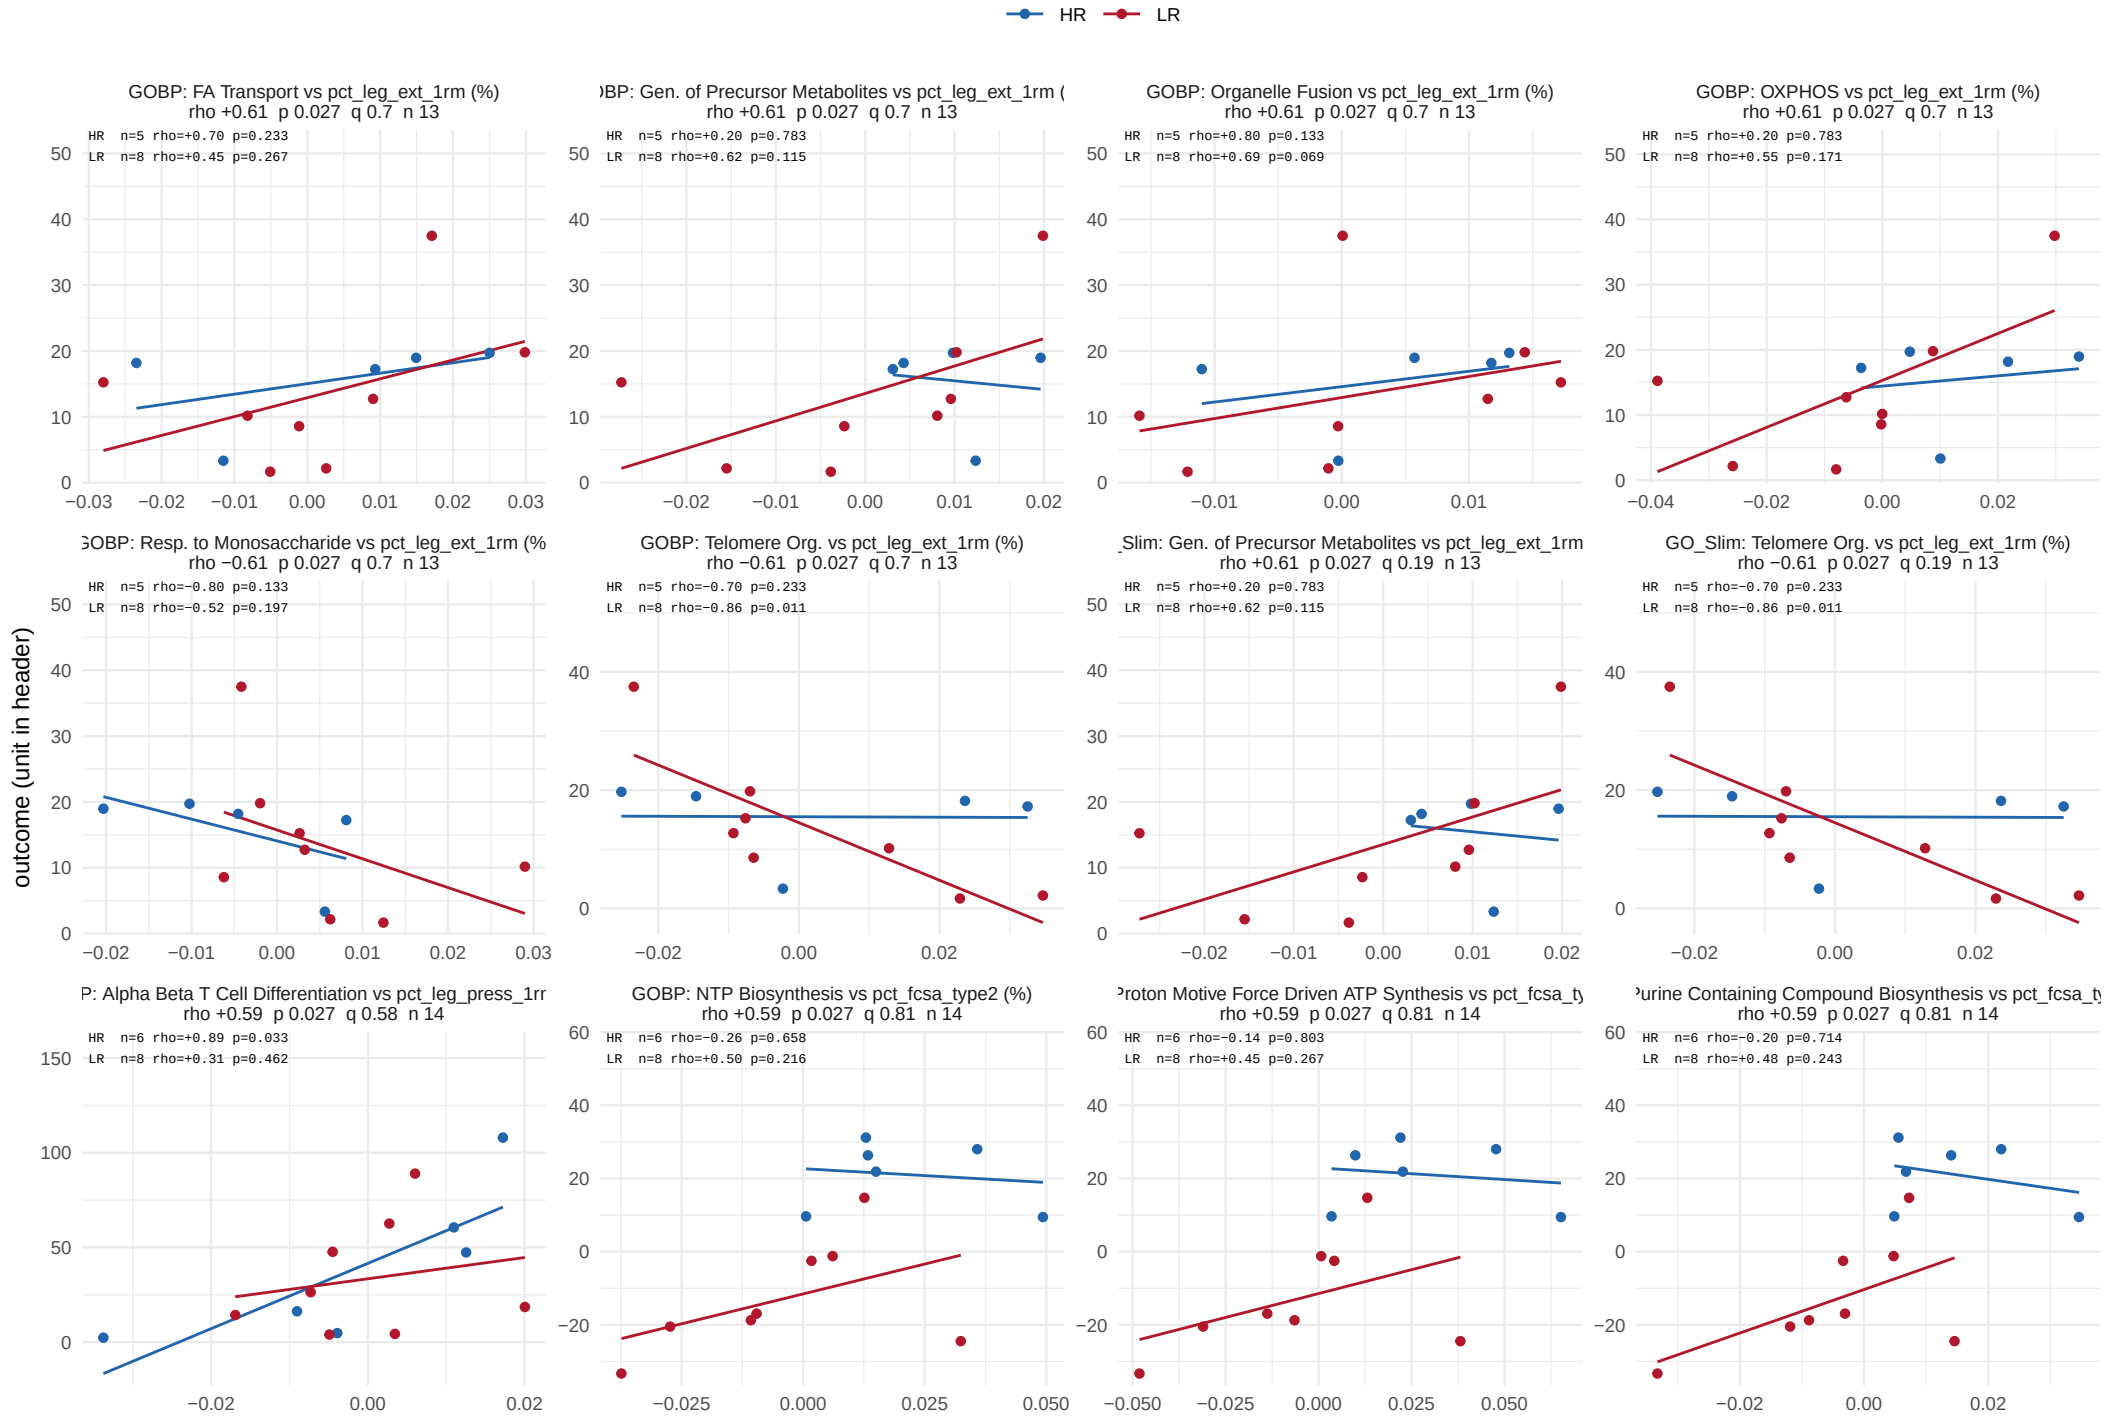


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, training window


456 of 11024 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 21 of 38.

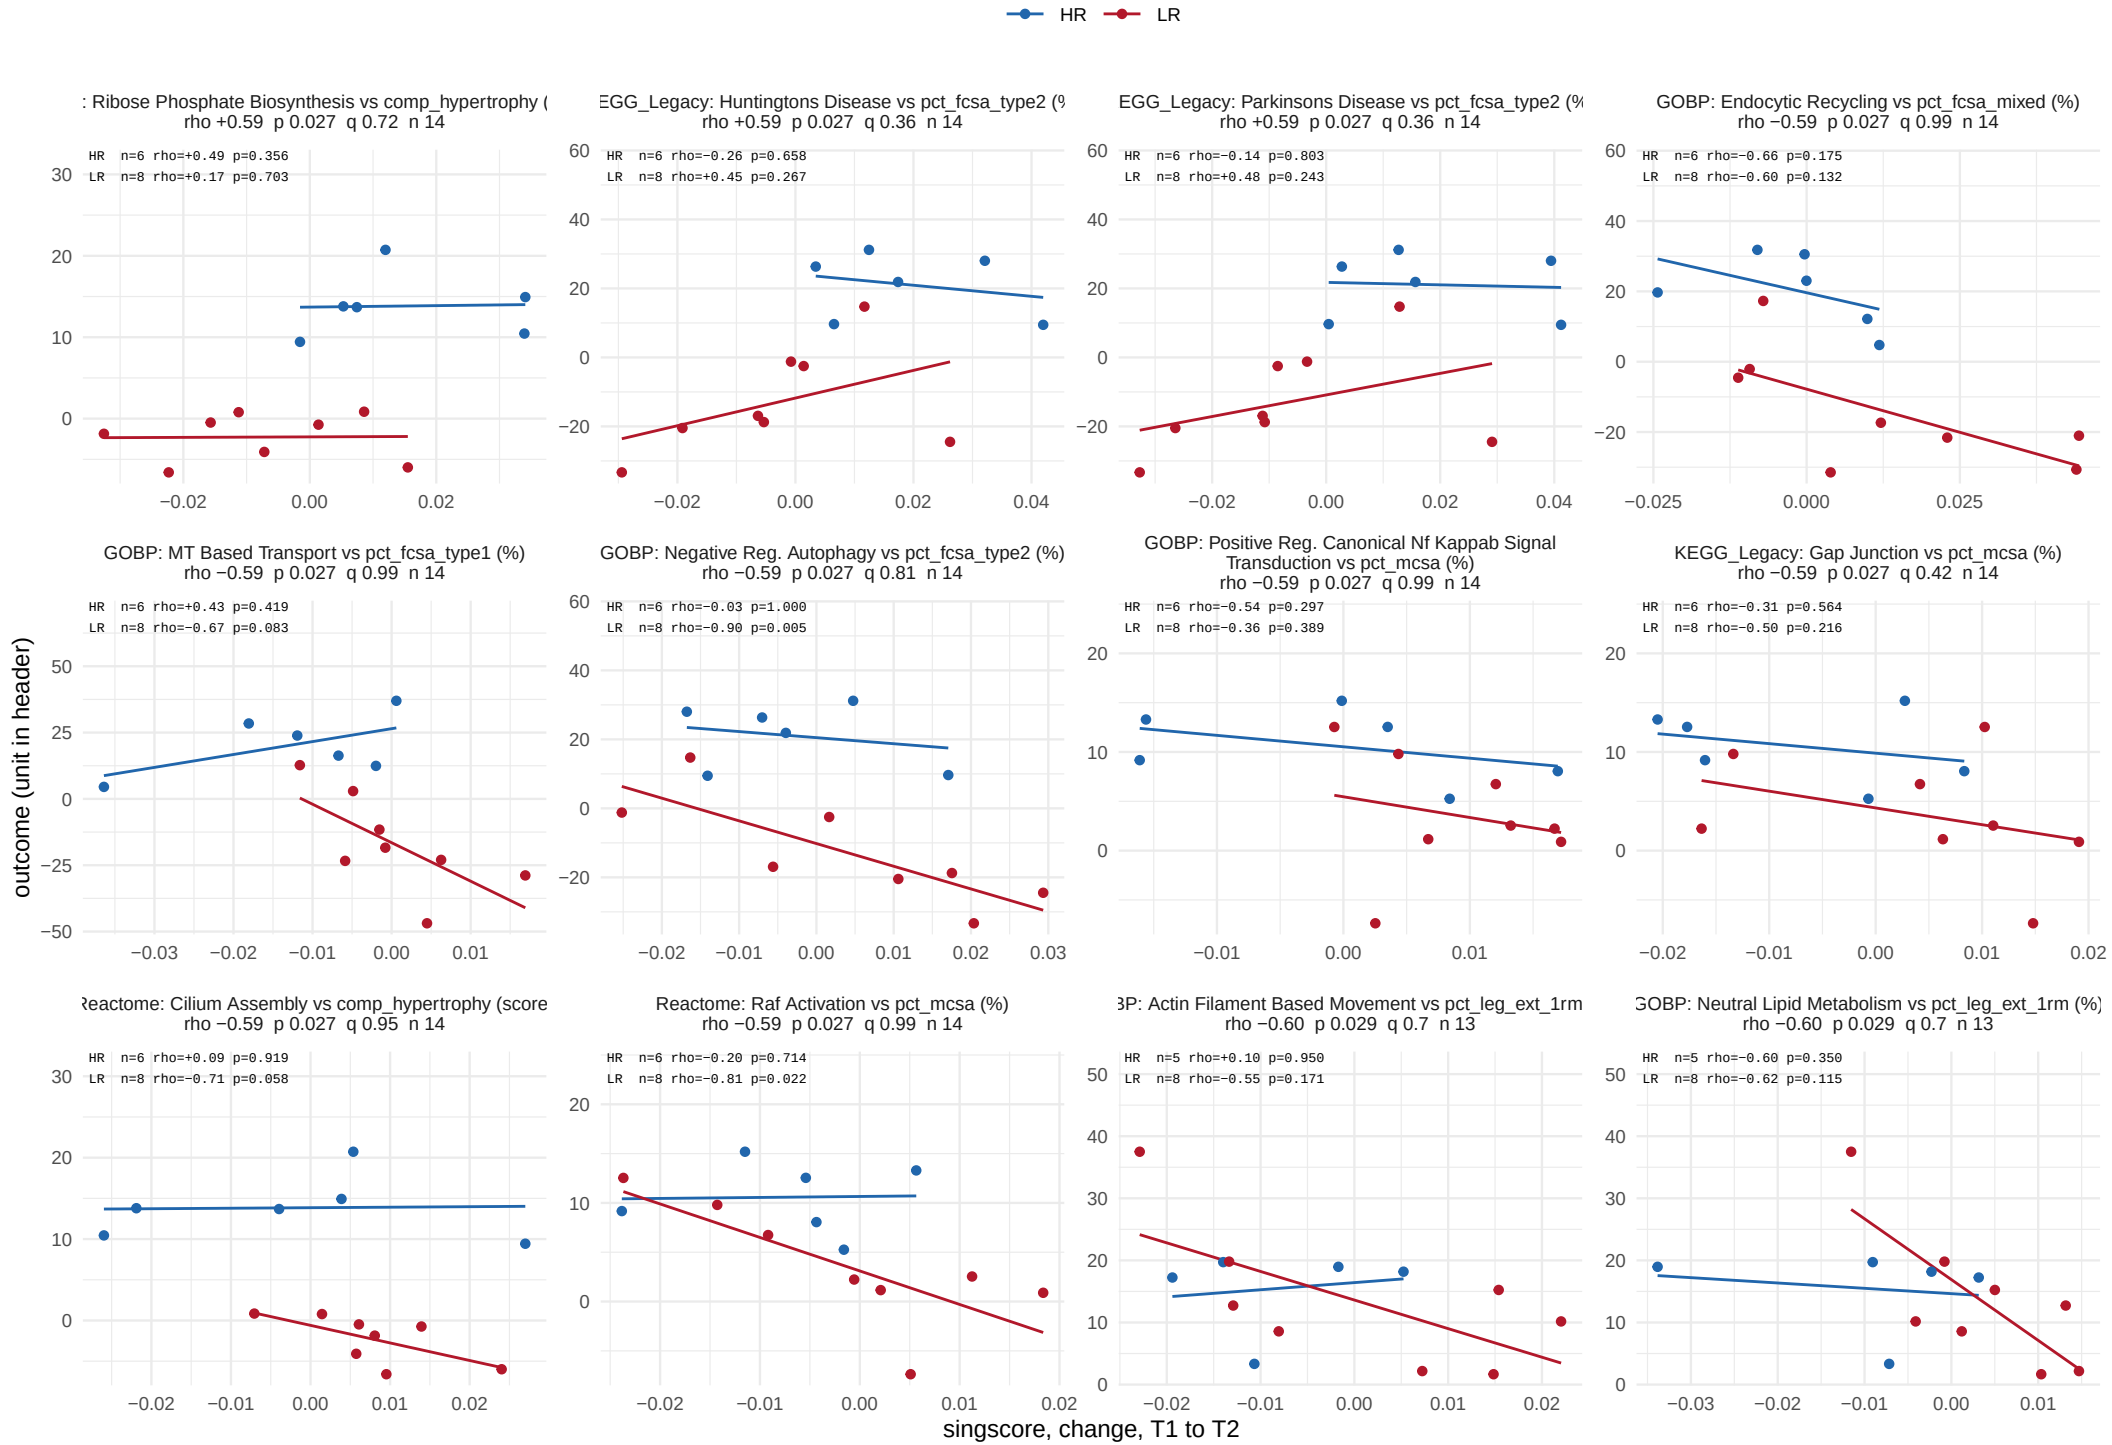


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, training window


456 of 11024 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 22 of 38.

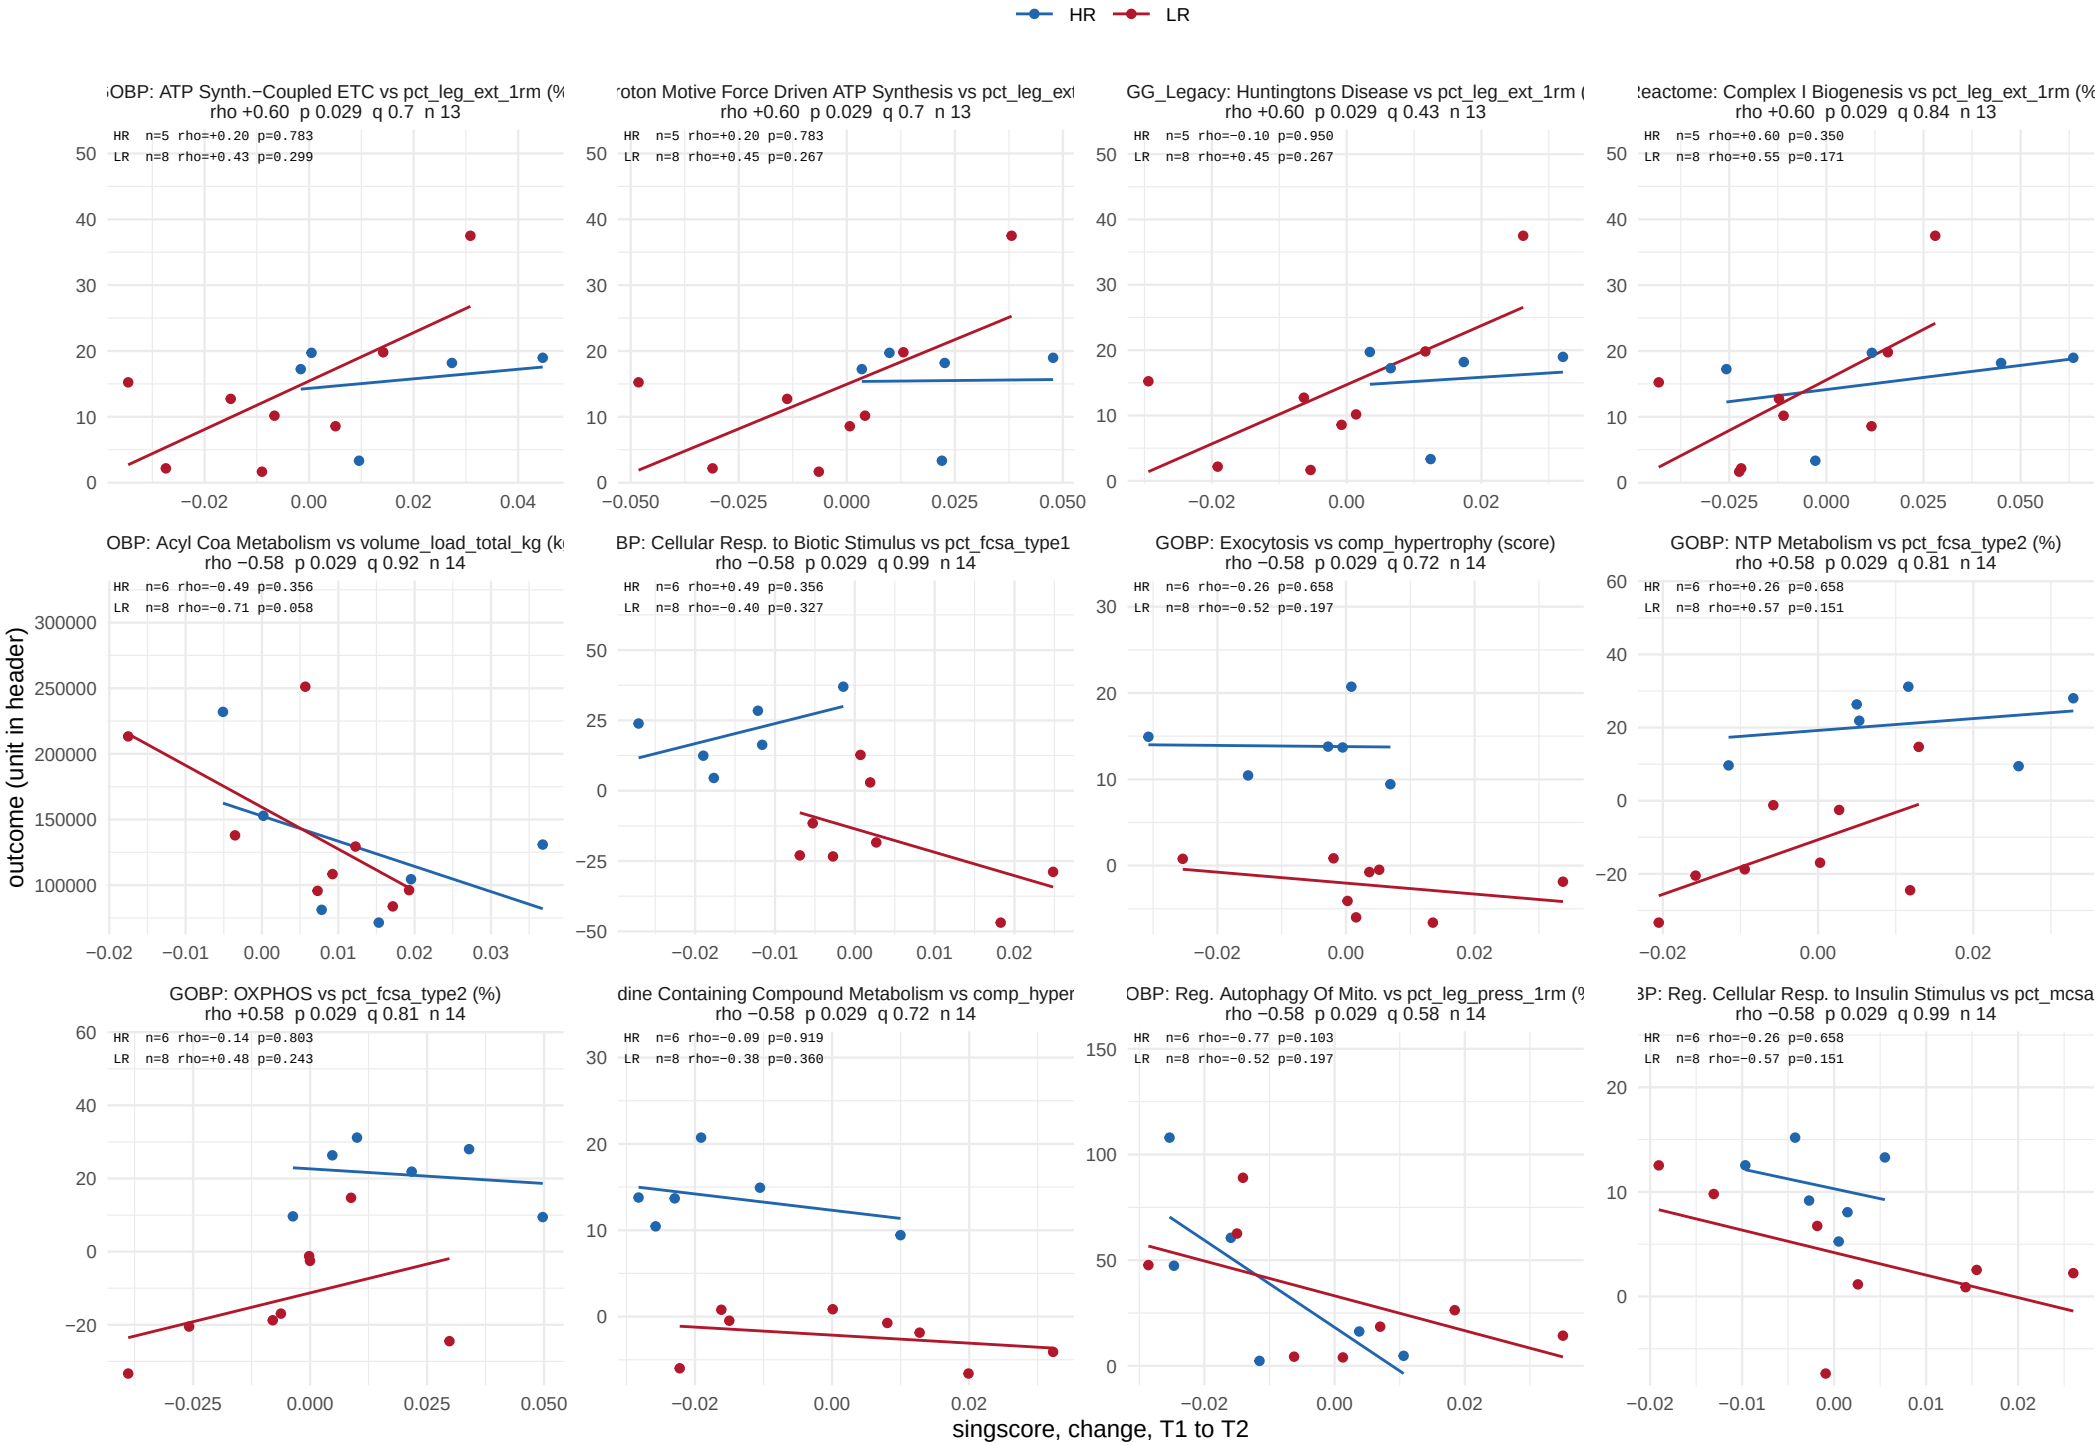


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, training window


456 of 11024 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 23 of 38.

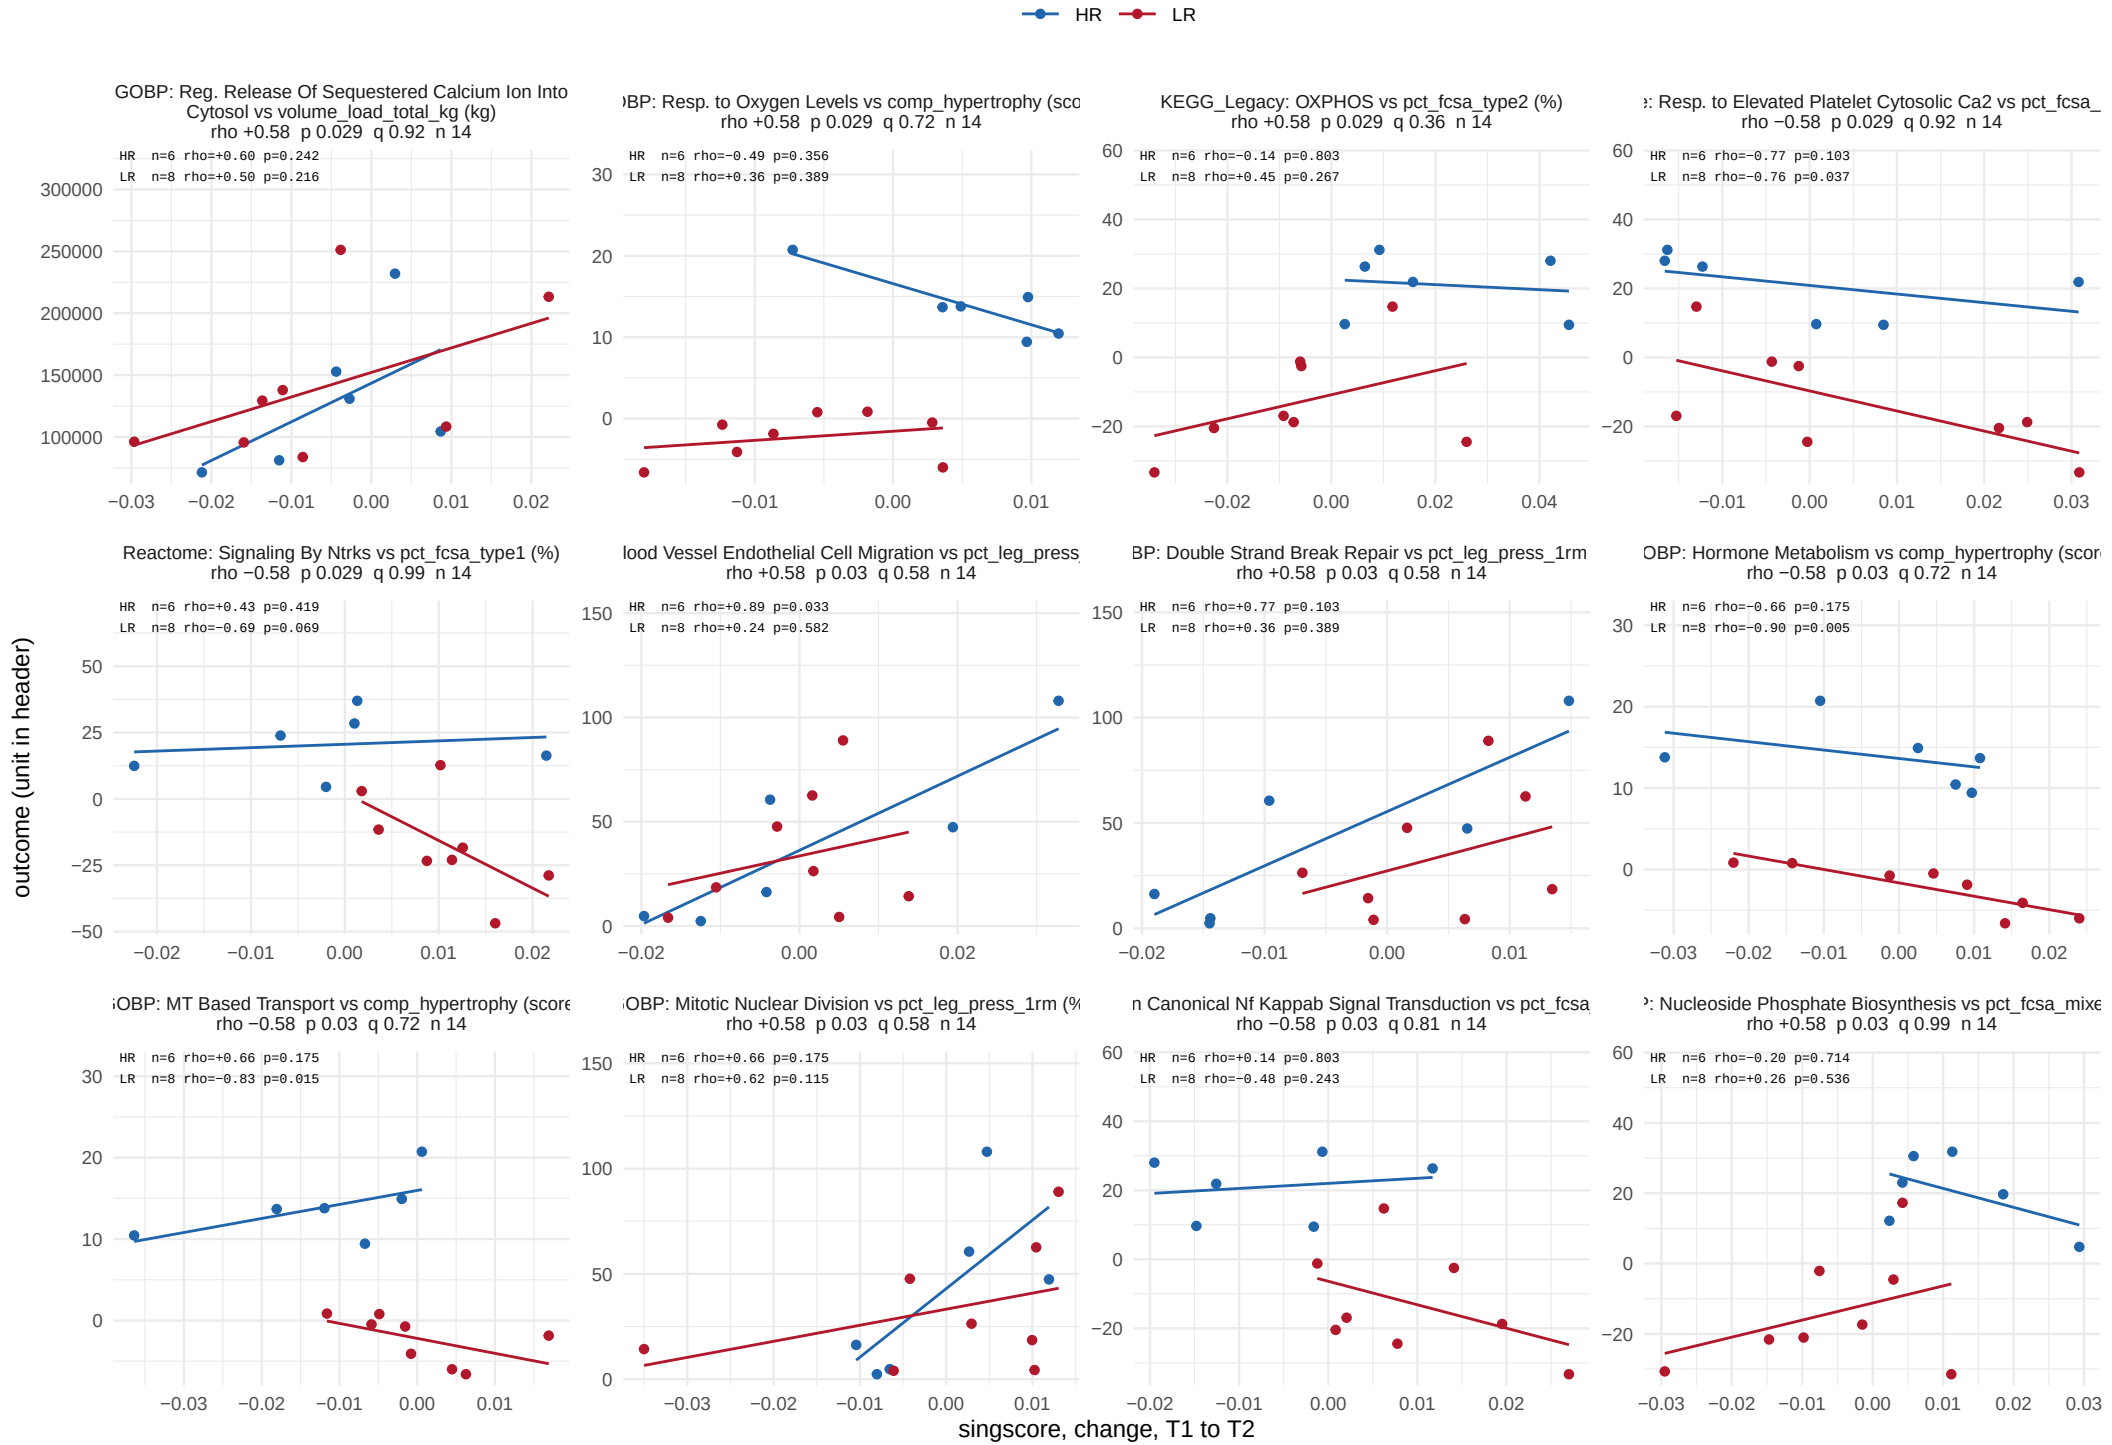


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, training window


456 of 11024 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 24 of 38.

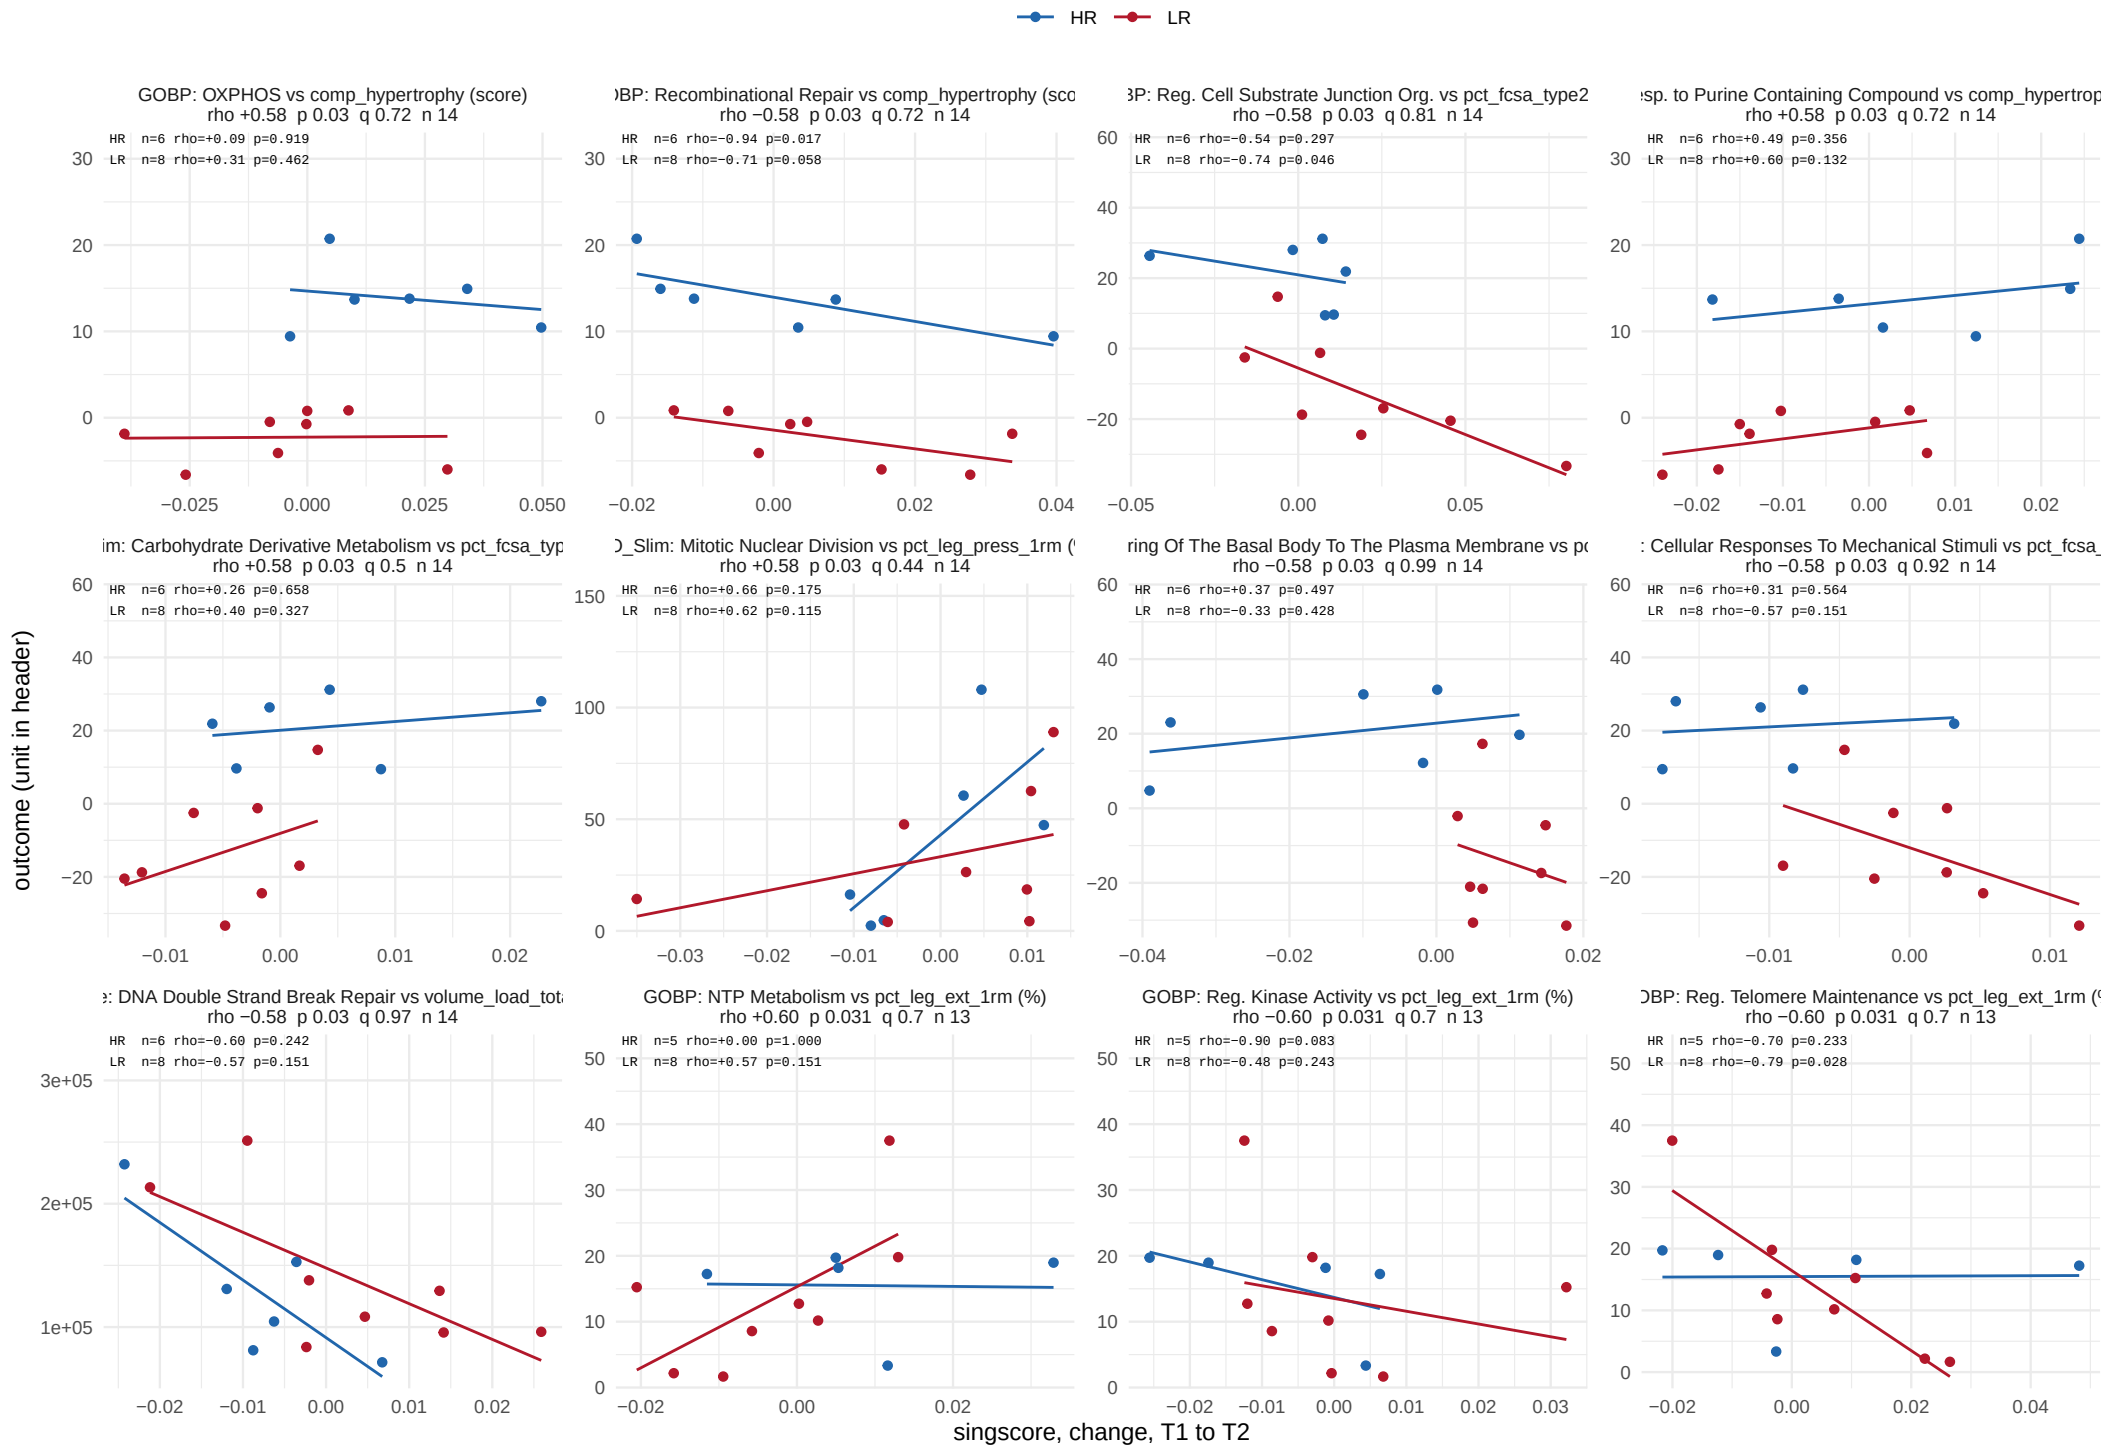


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, training window


456 of 11024 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 25 of 38.

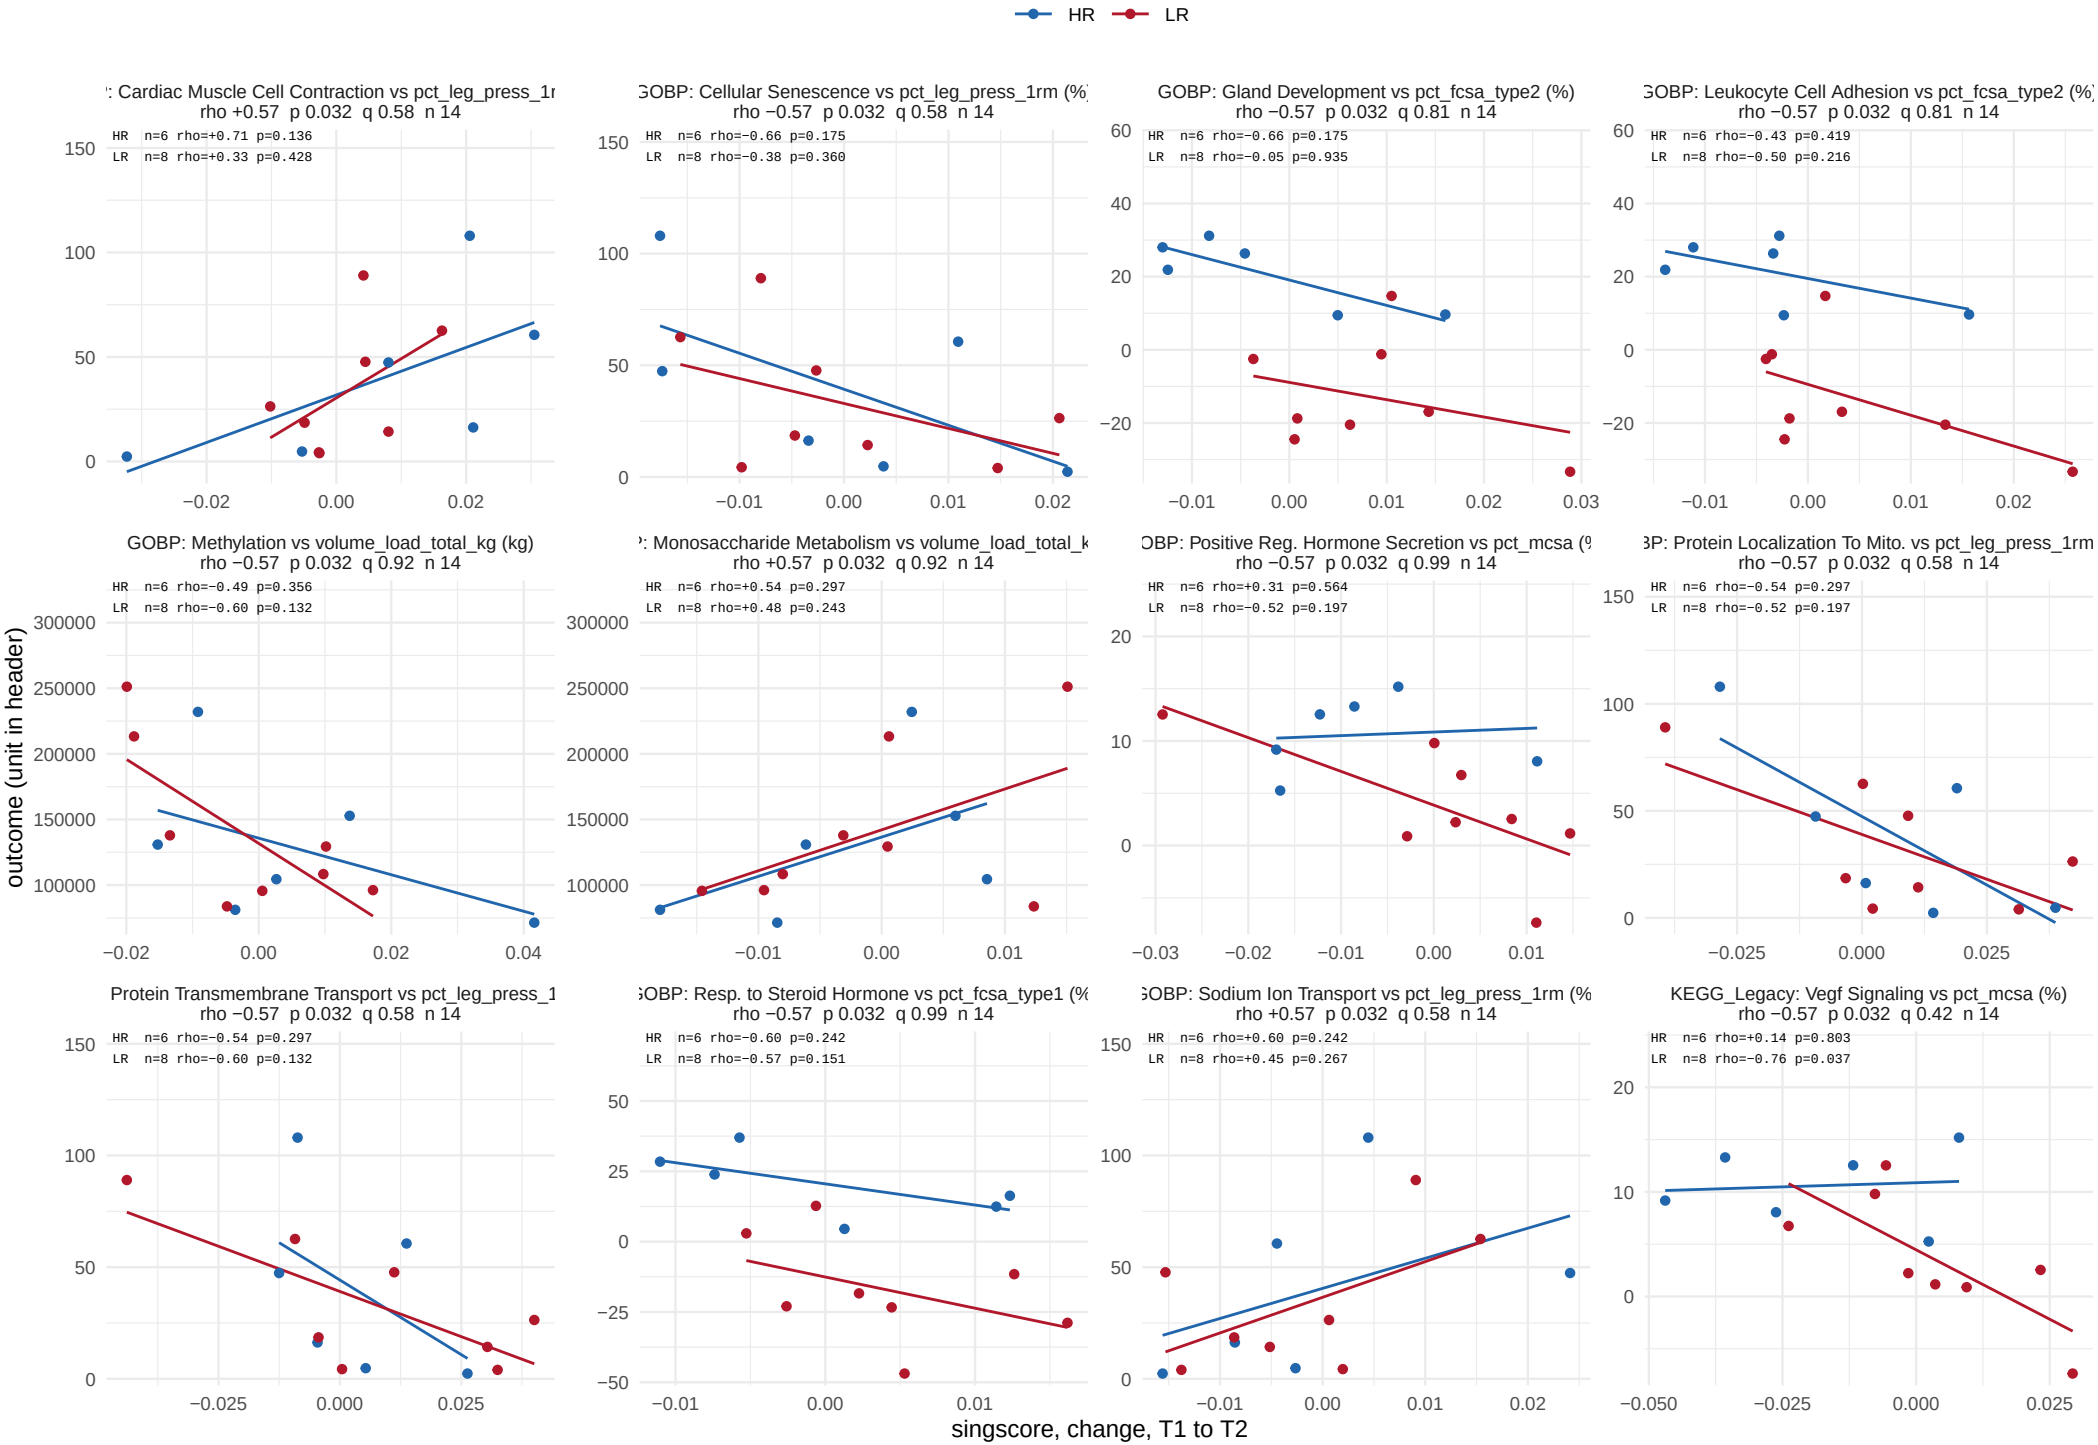


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, training window


456 of 11024 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 26 of 38.

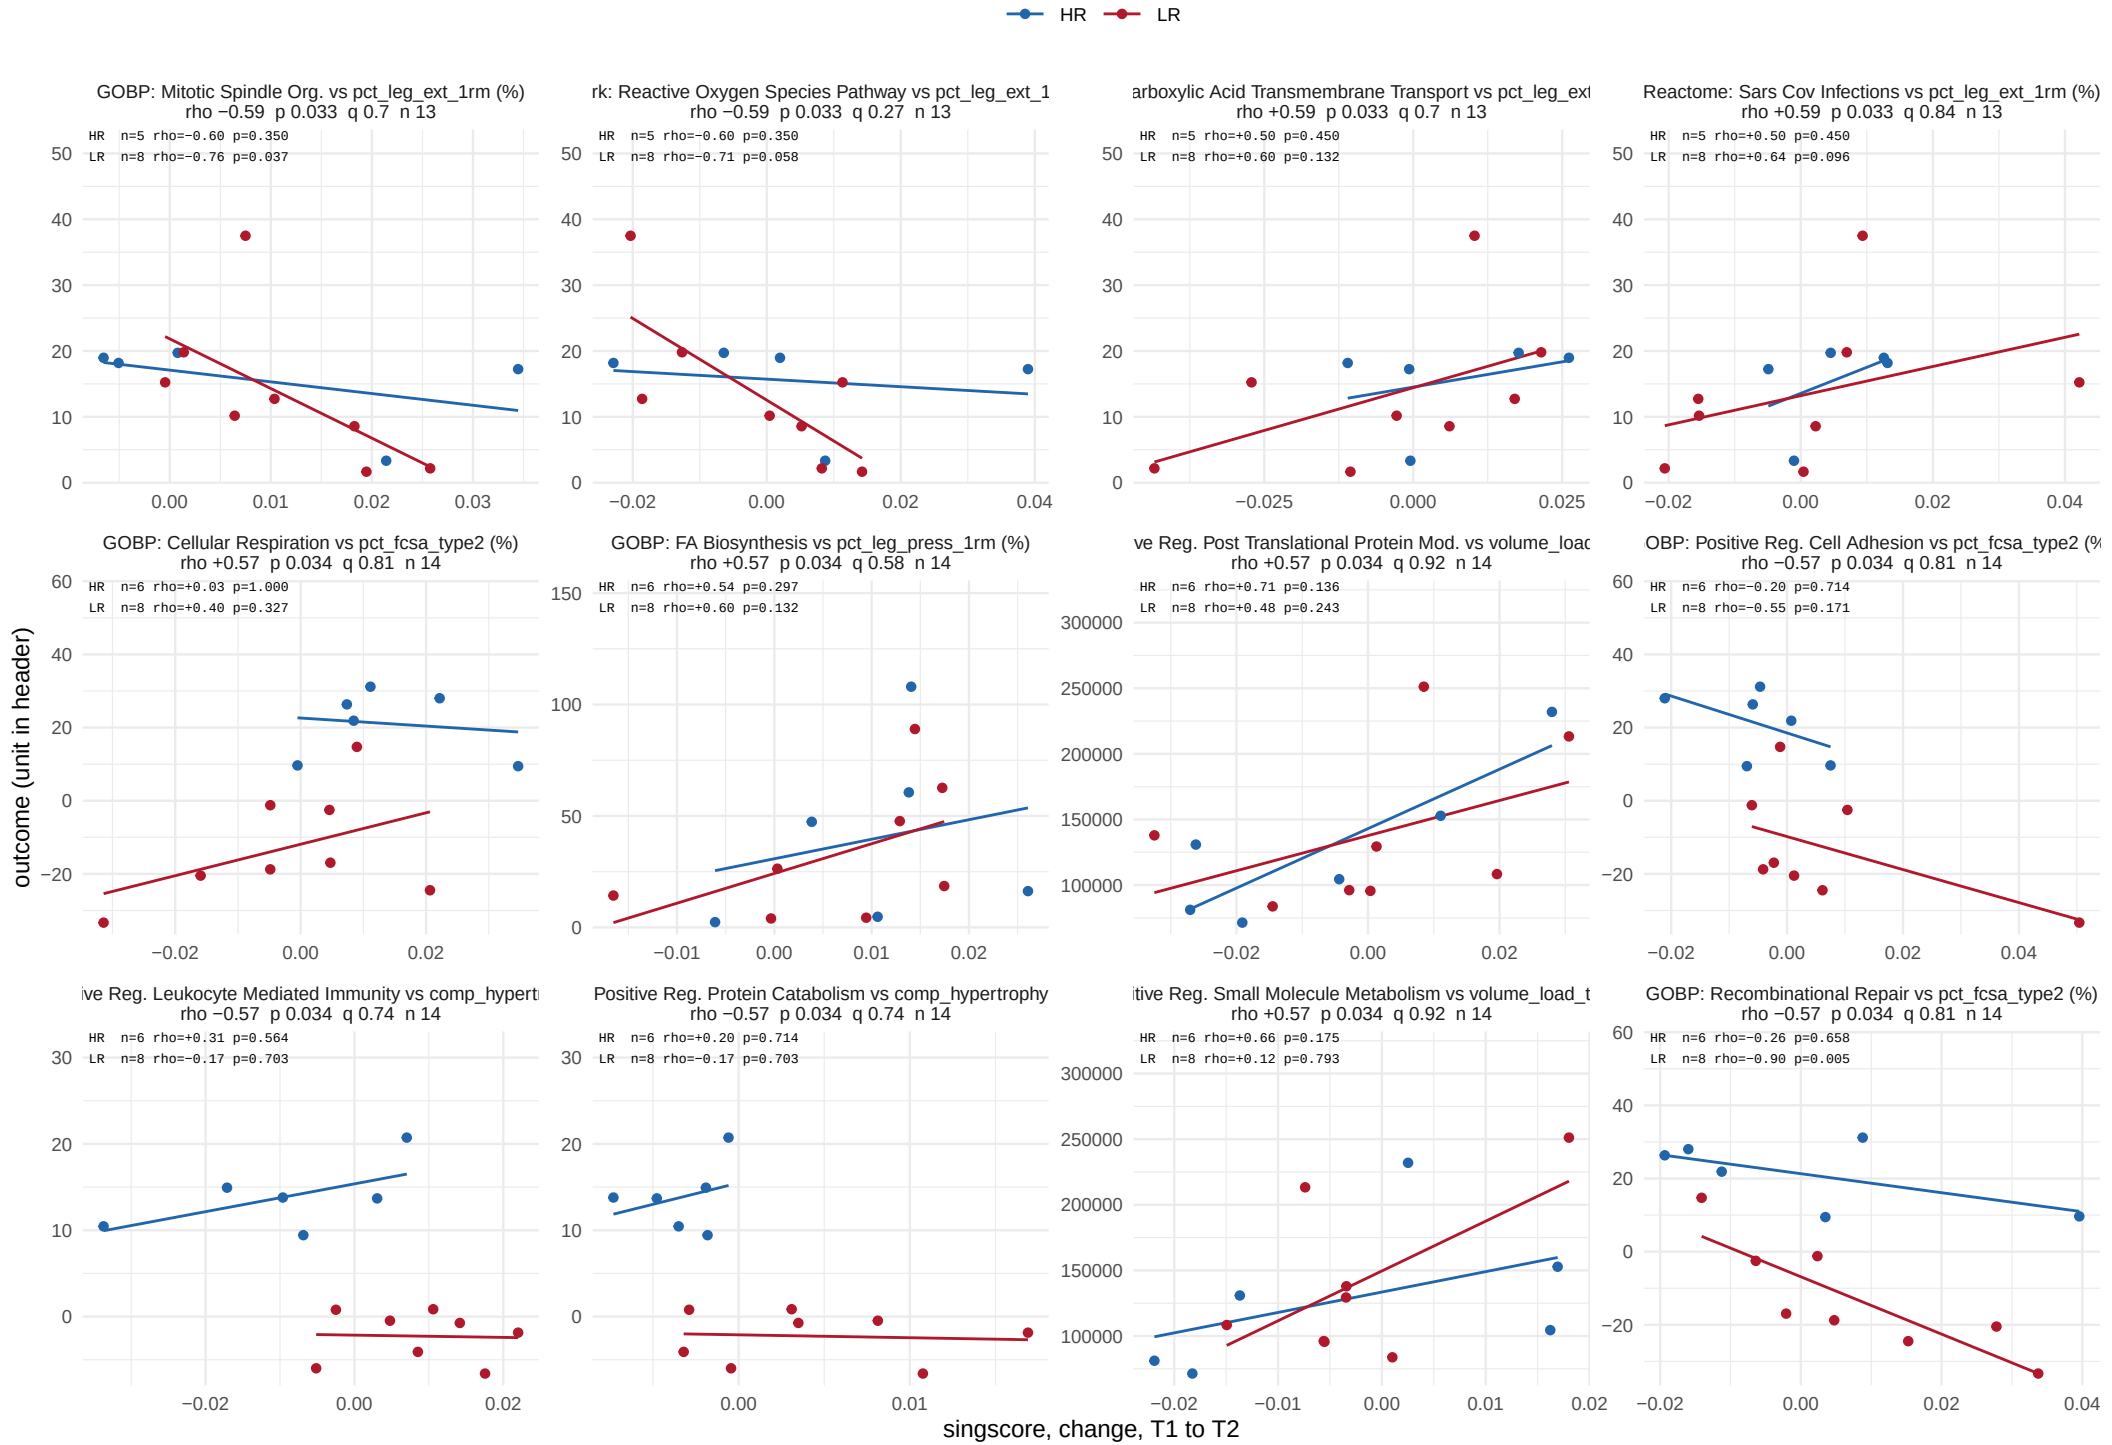


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, training window


456 of 11024 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 27 of 38.

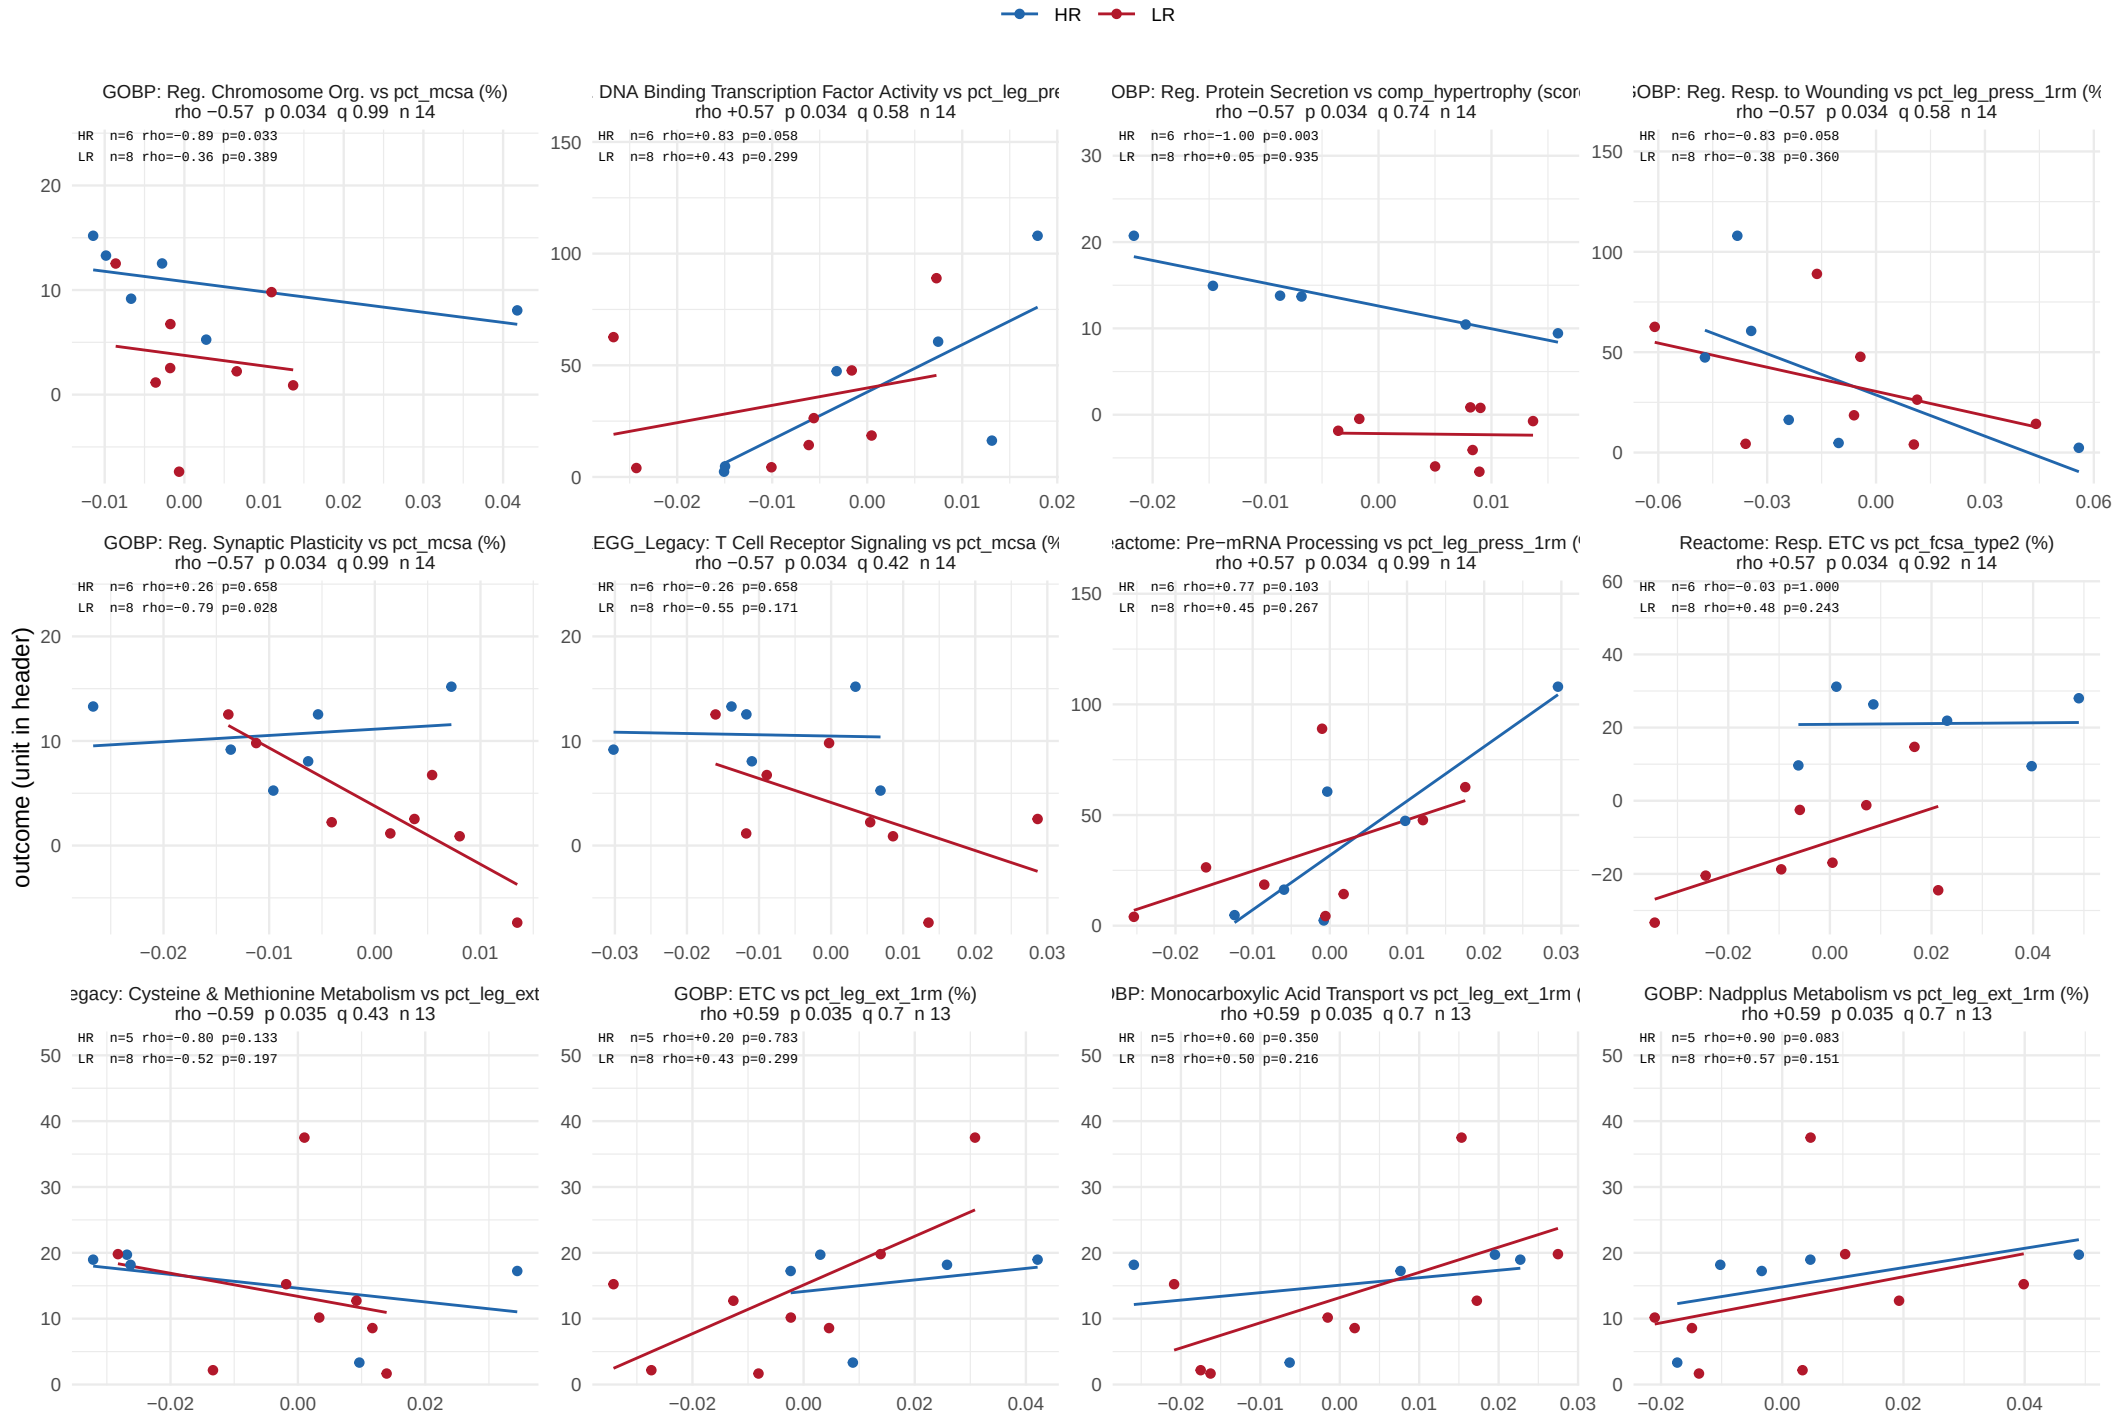


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, training window


456 of 11024 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 28 of 38.

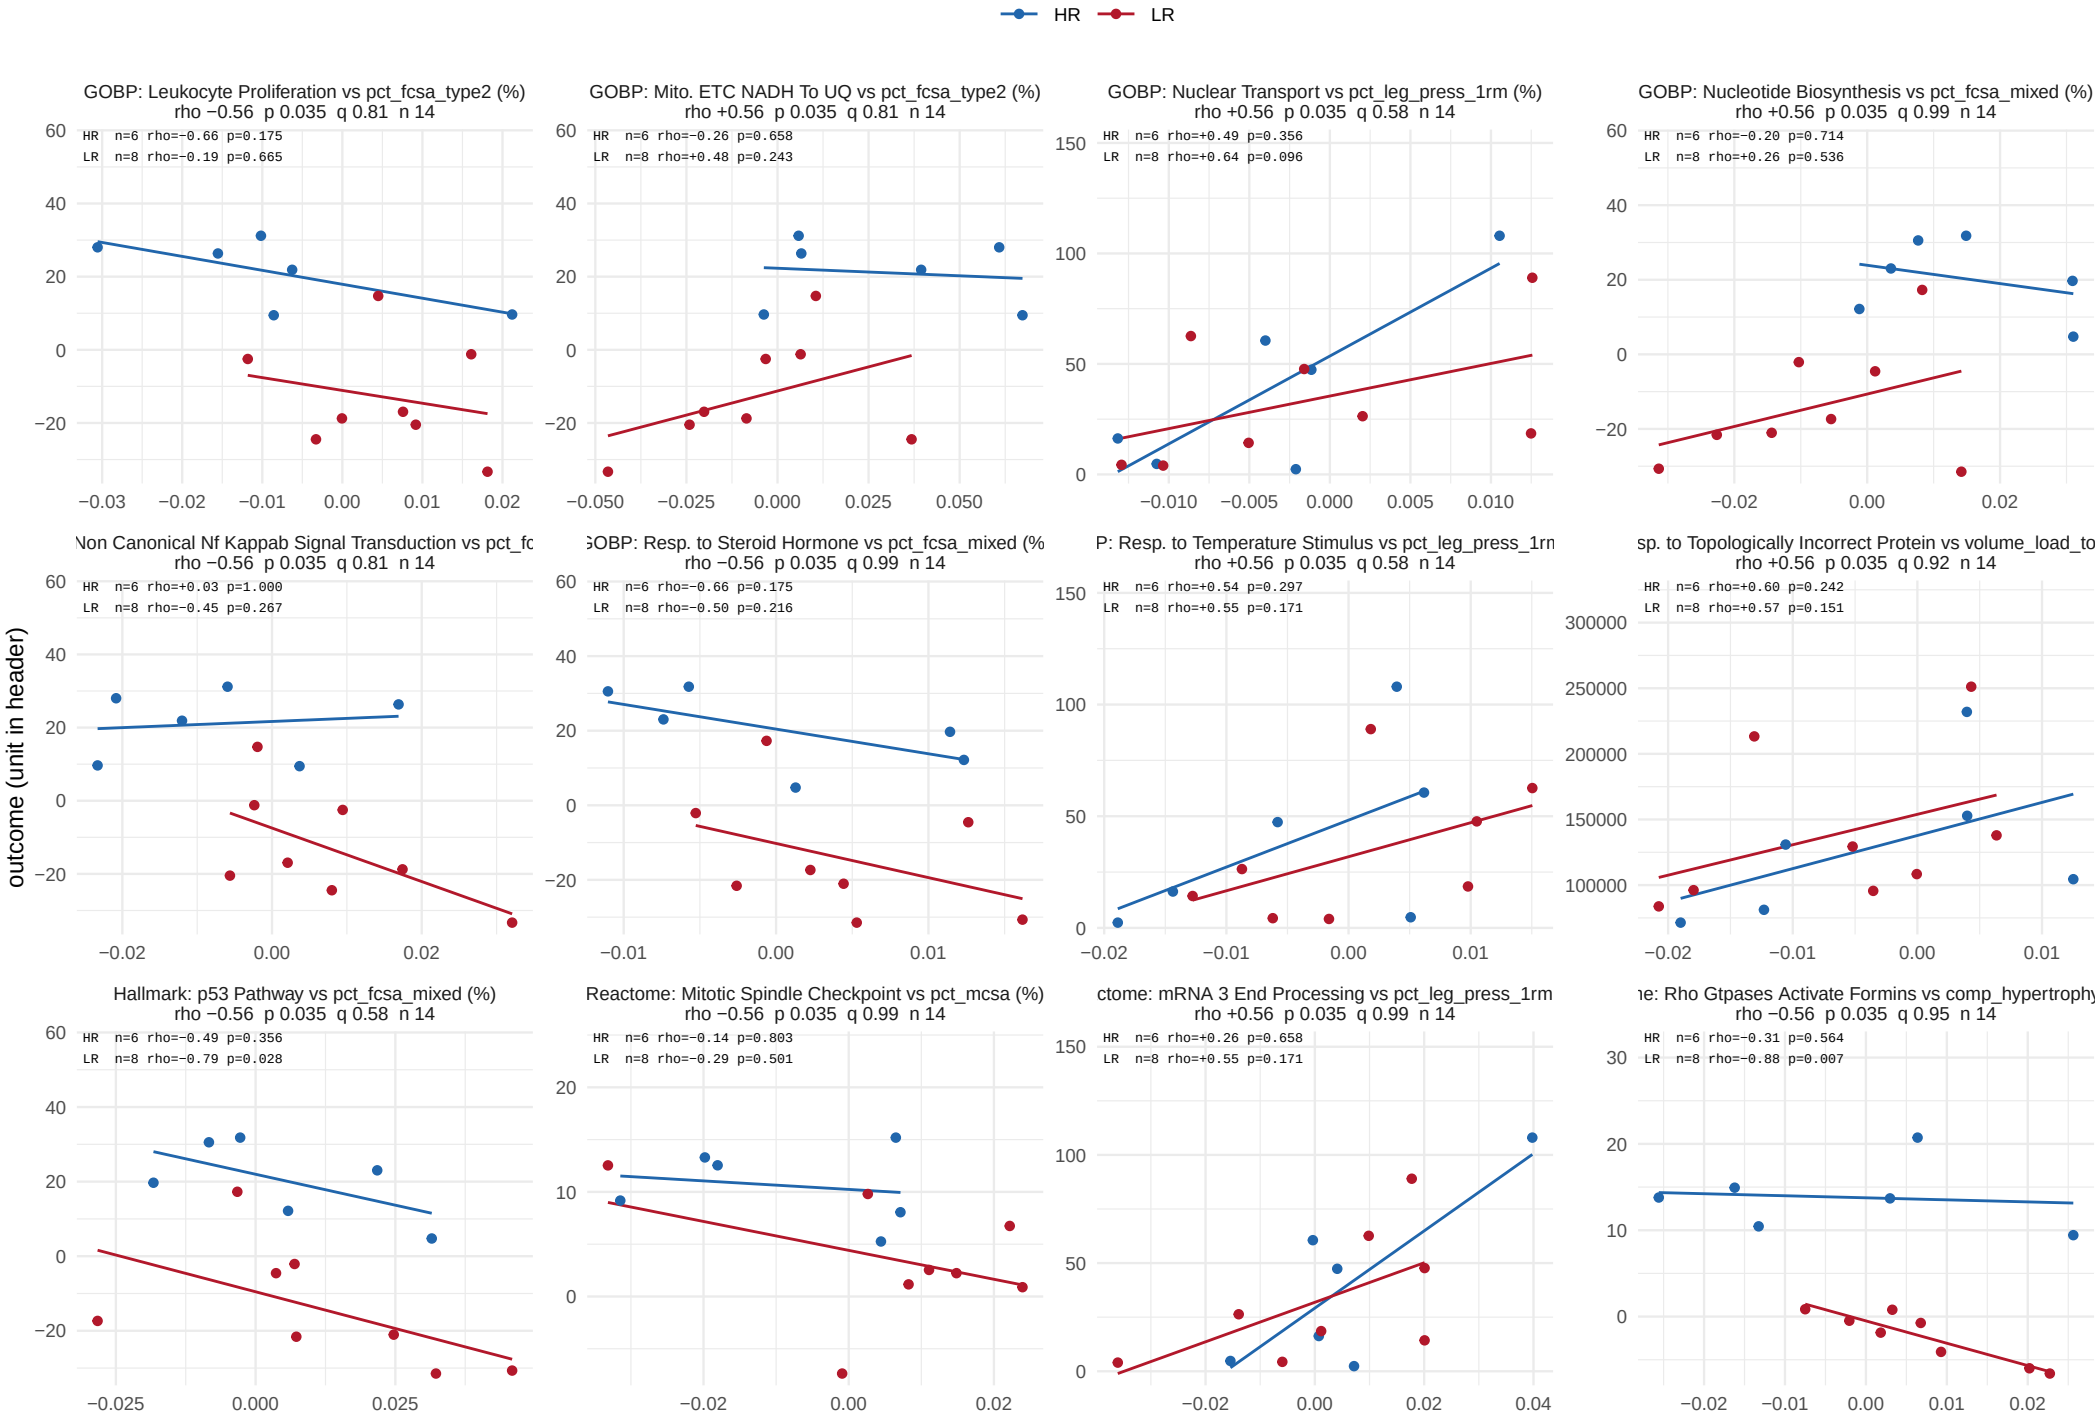


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, training window


456 of 11024 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 29 of 38.

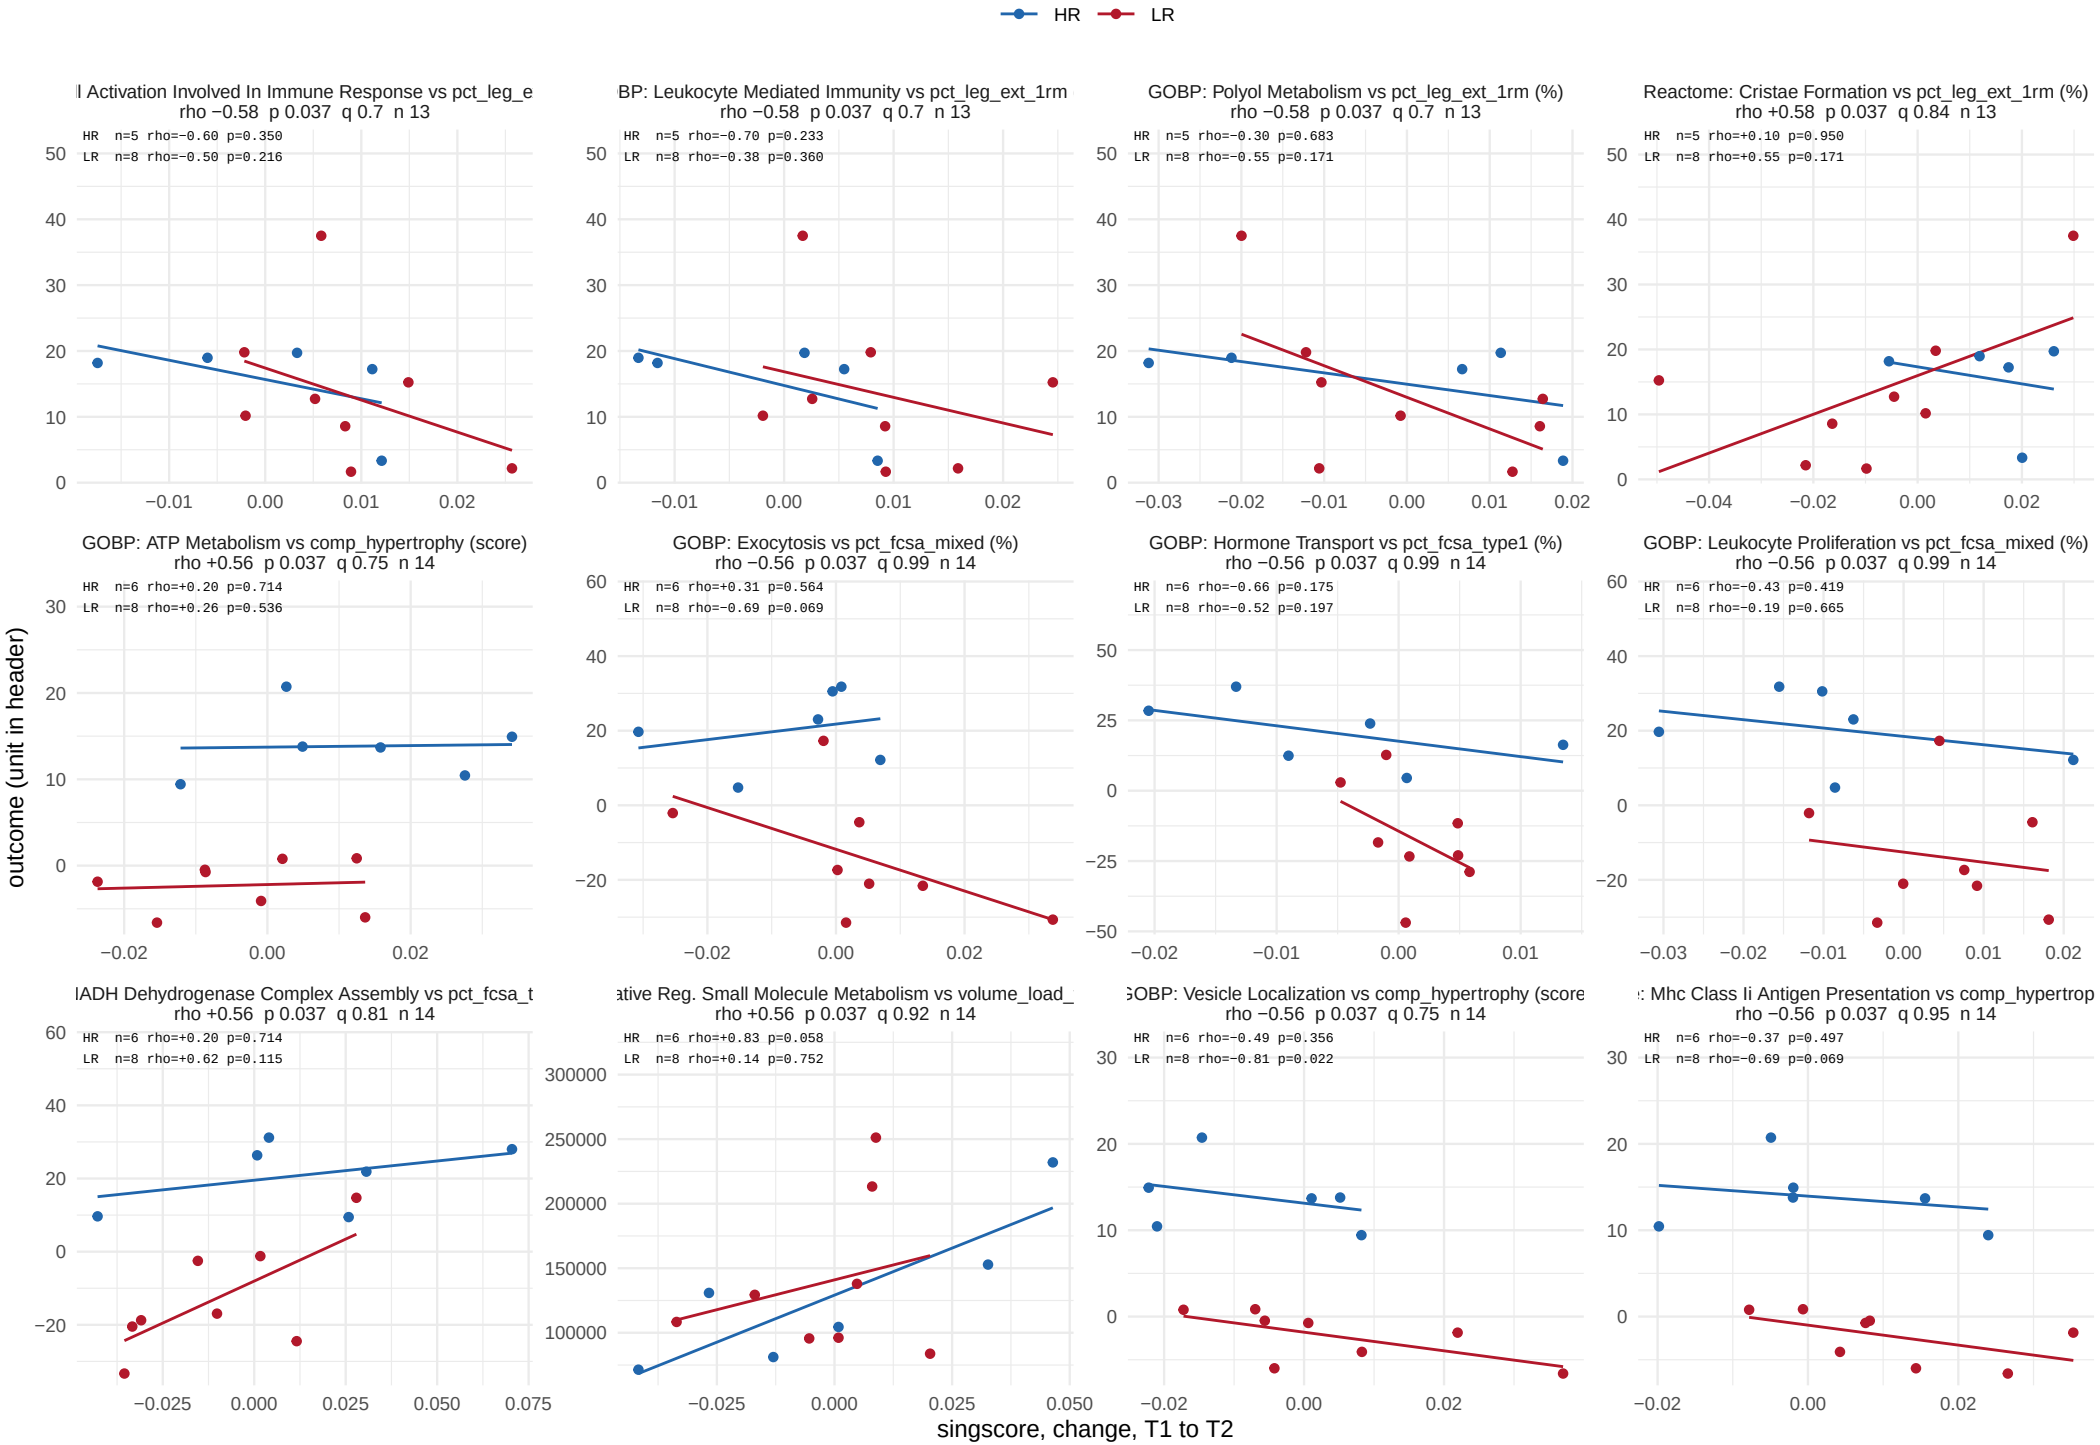


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, training window


456 of 11024 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 30 of 38.

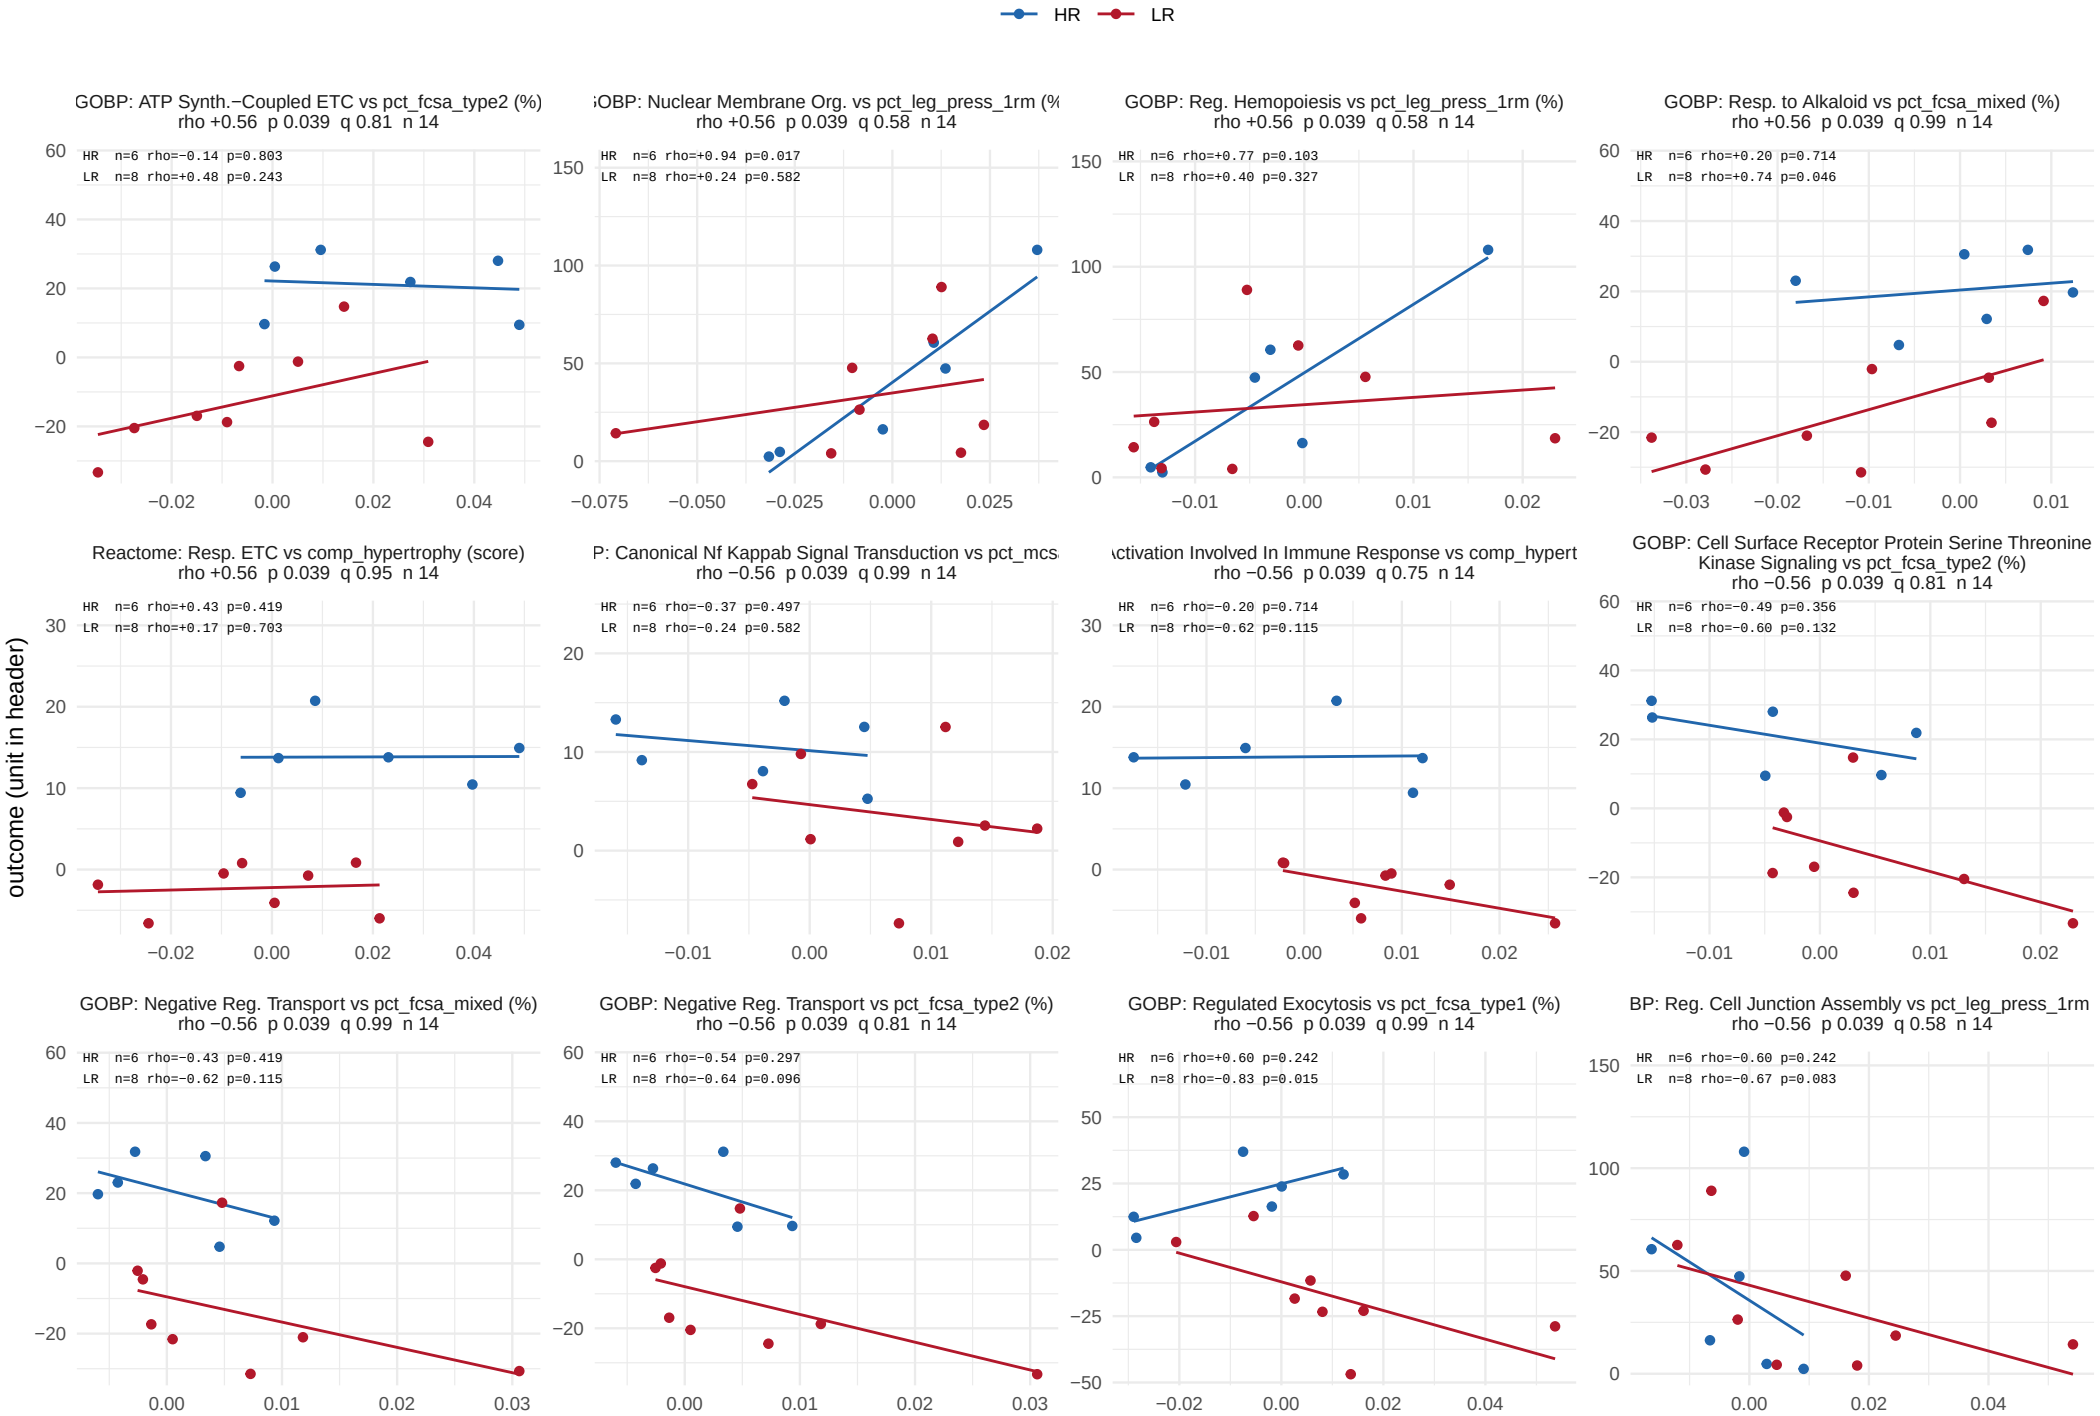


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, training window


456 of 11024 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 31 of 38.

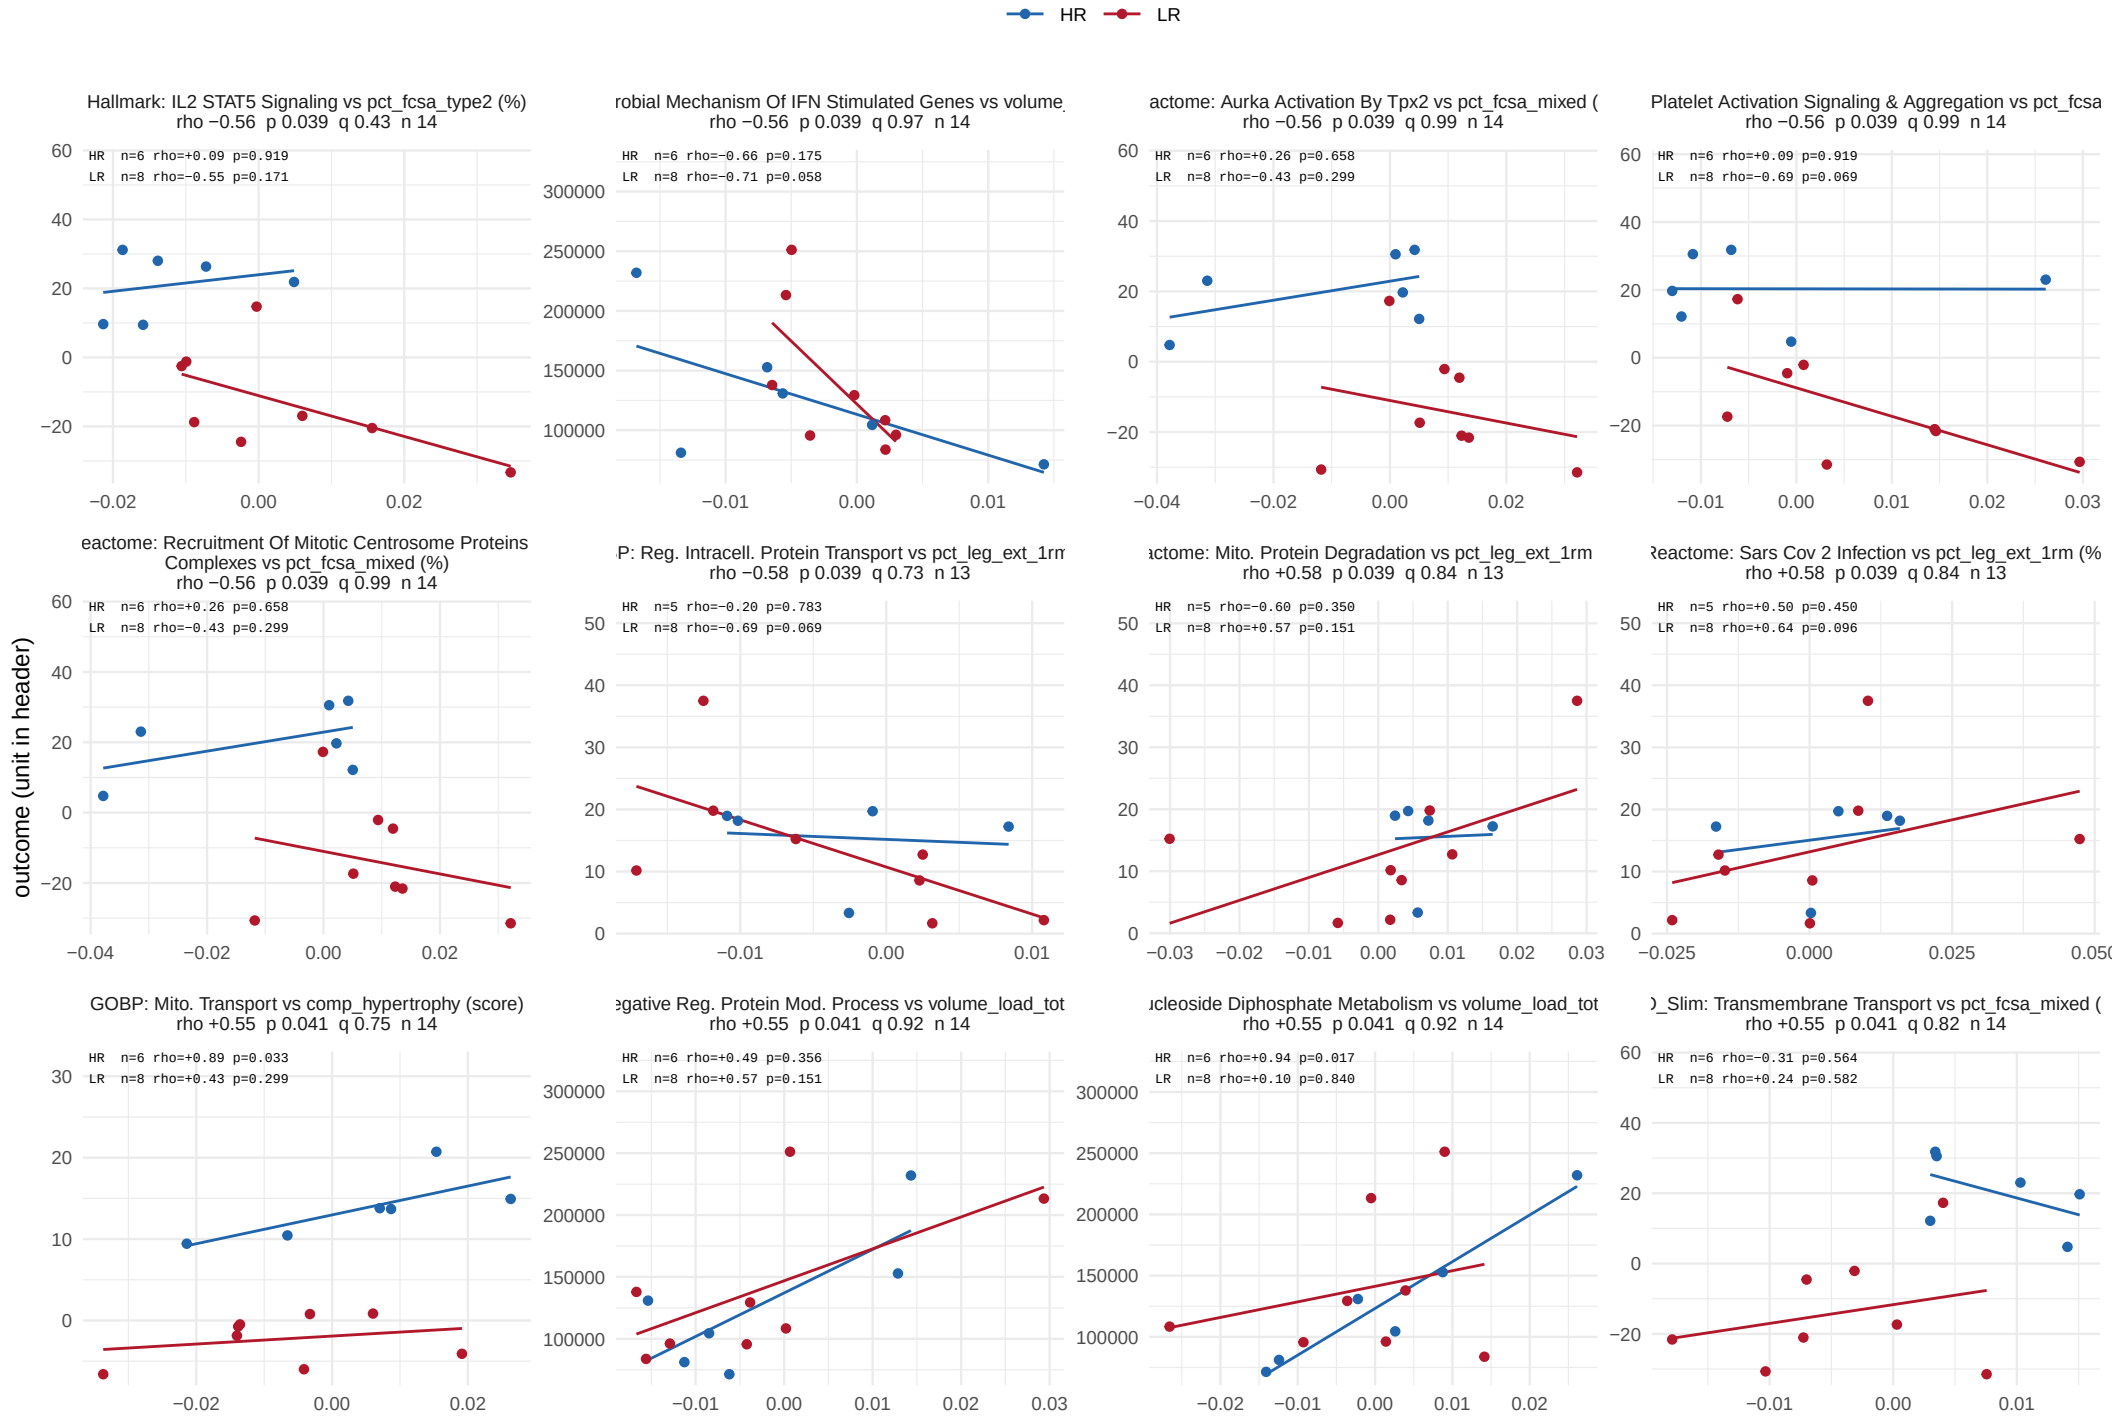


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, training window


456 of 11024 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 32 of 38.

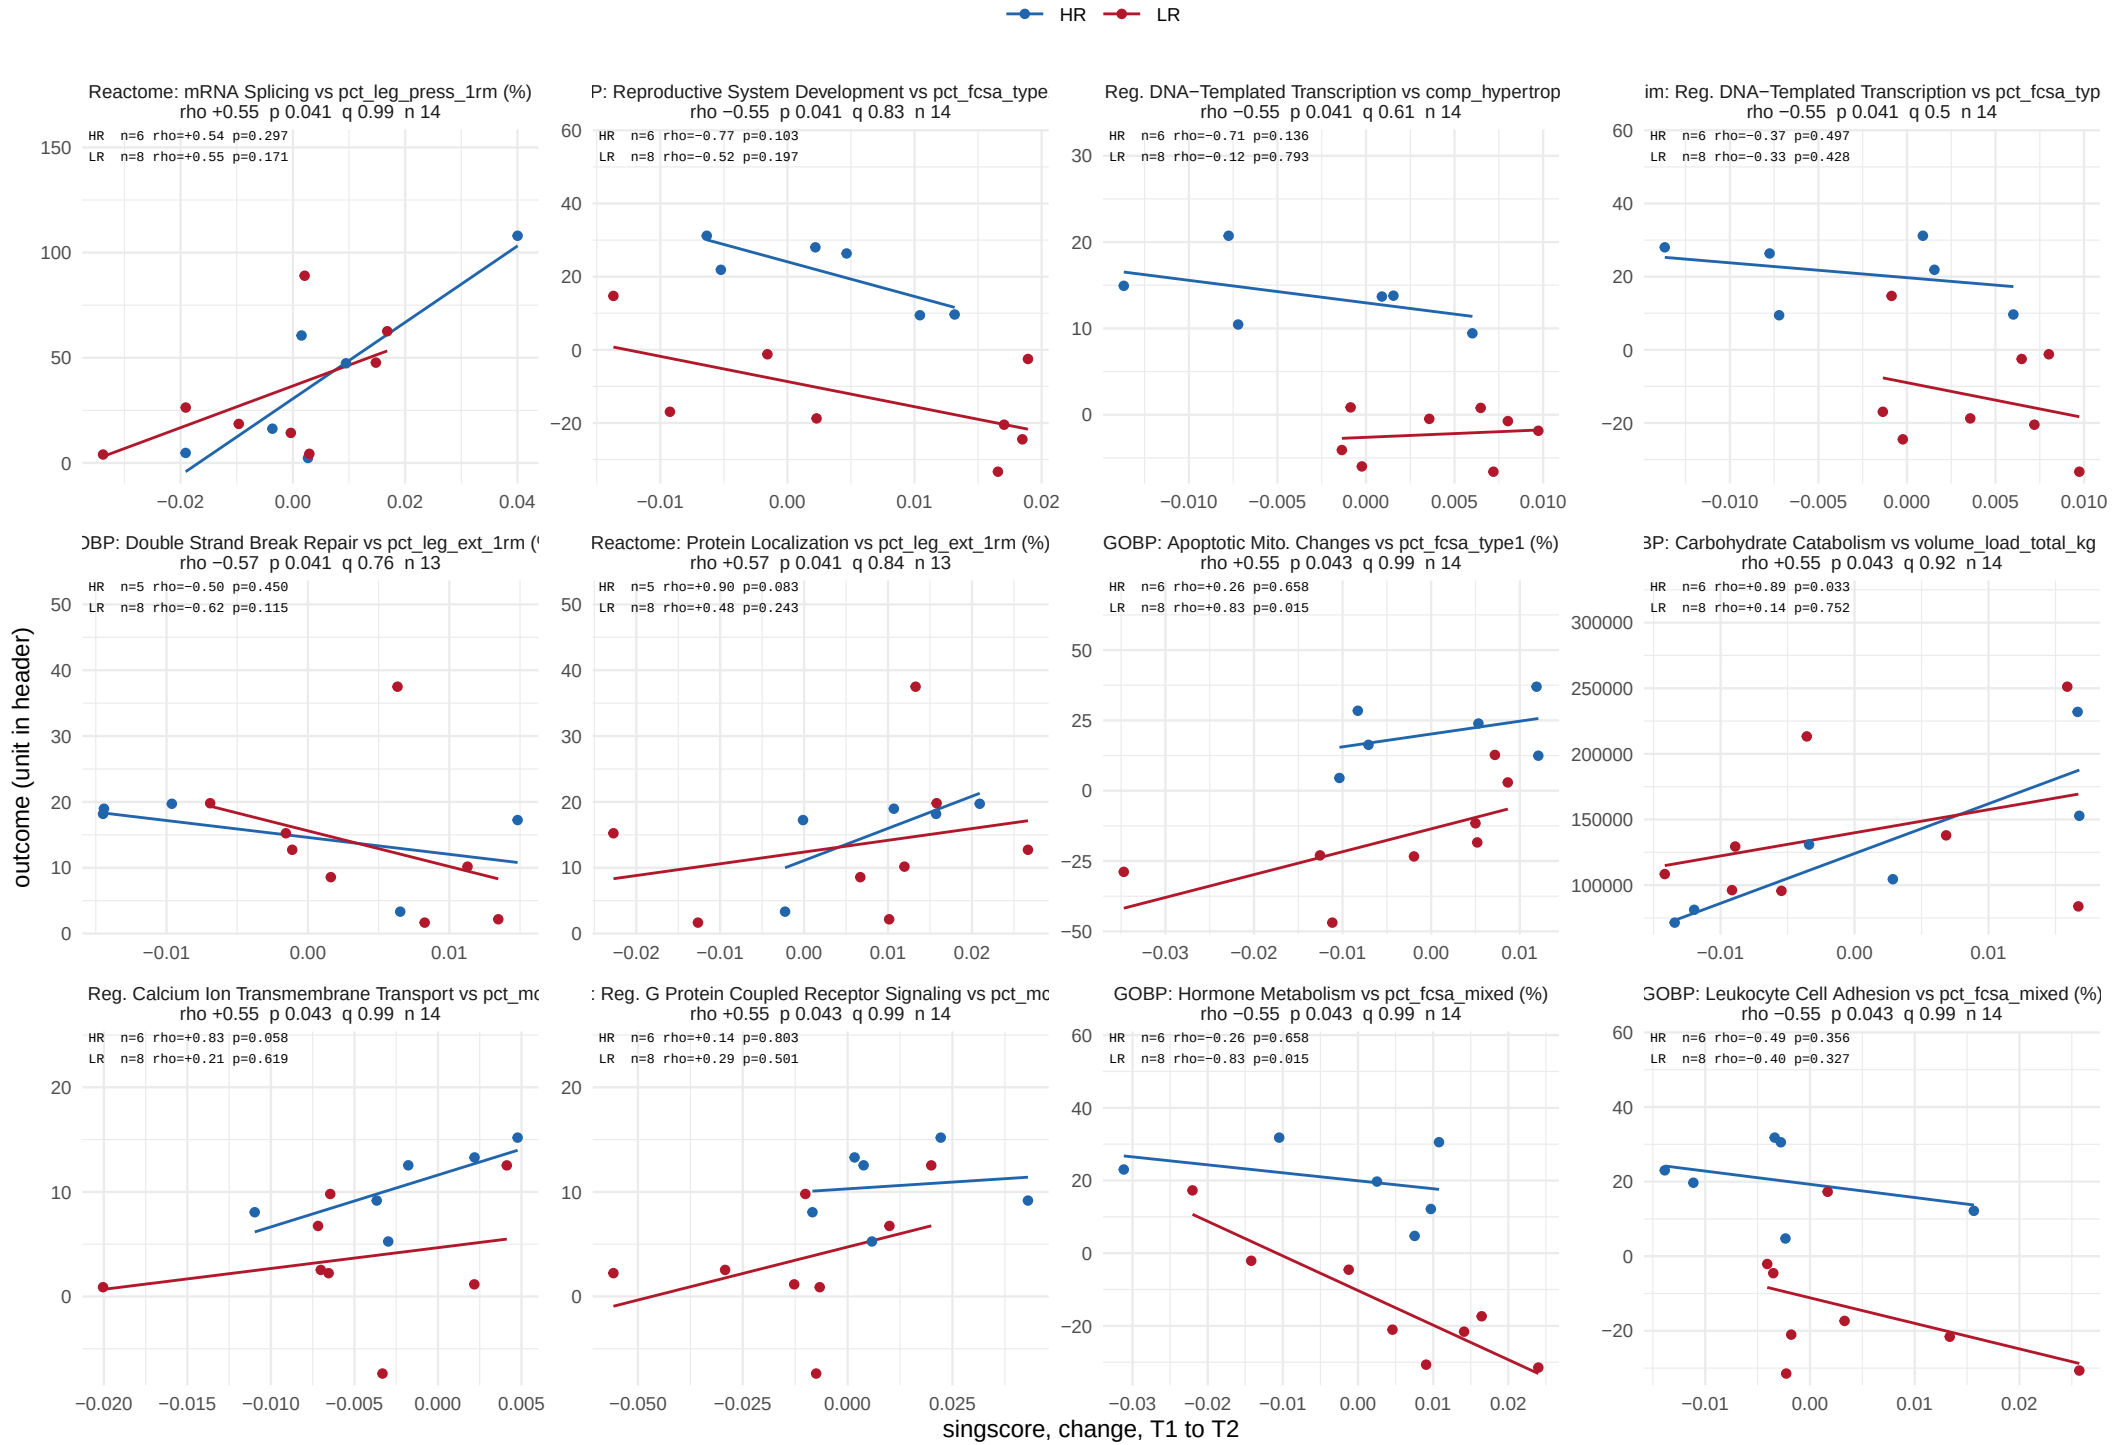


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, training window


456 of 11024 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 33 of 38.

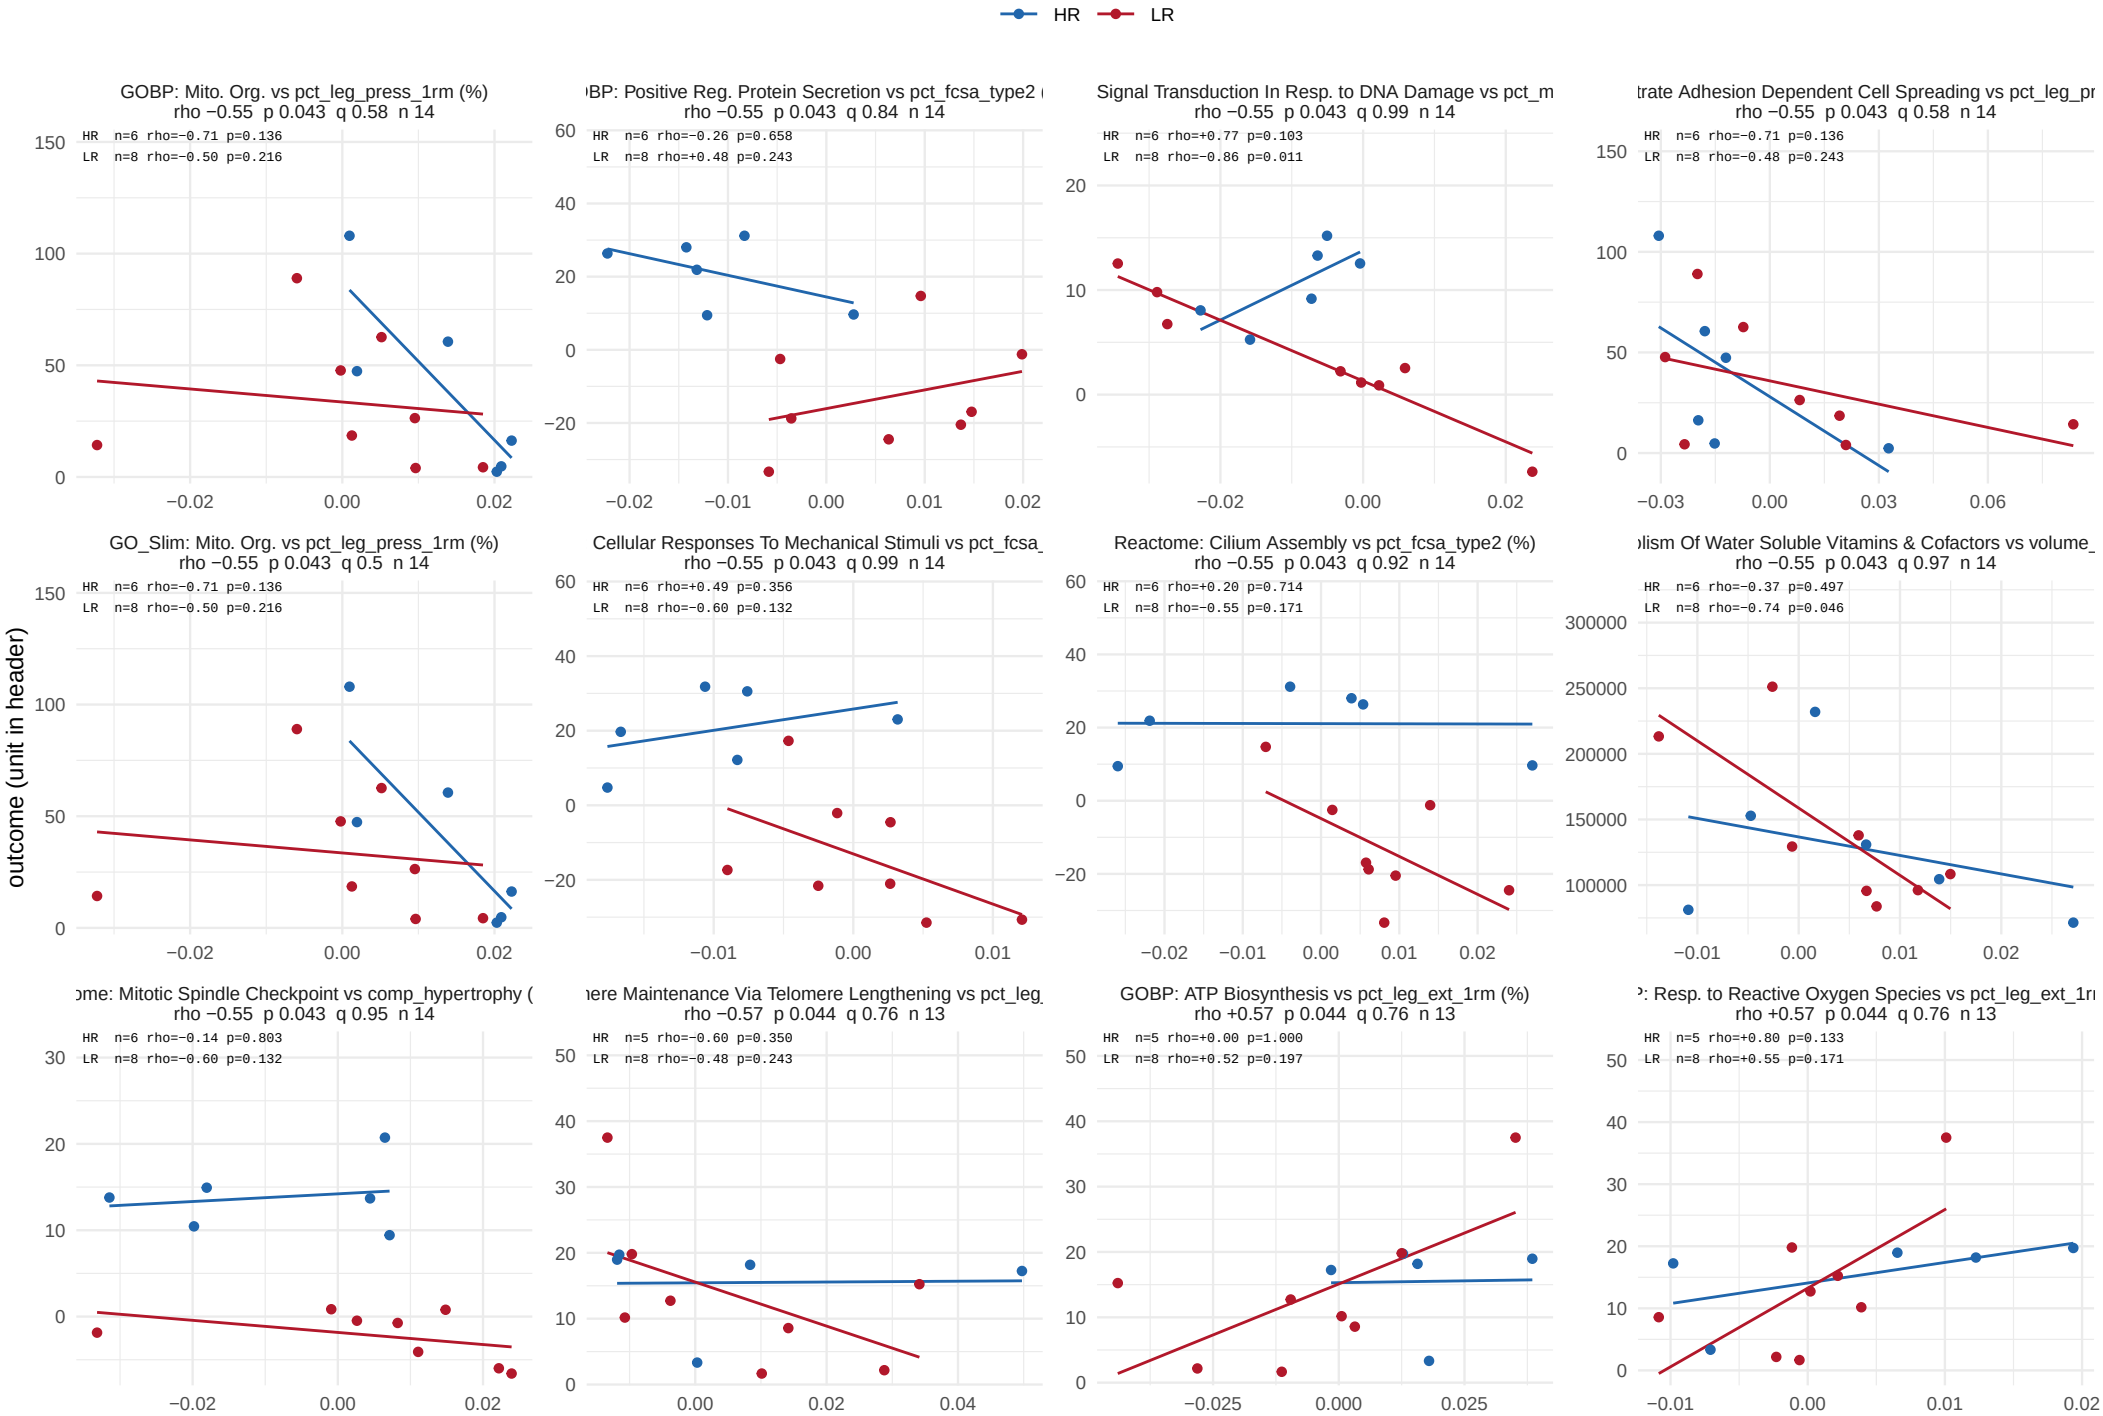


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, training window


456 of 11024 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 34 of 38.

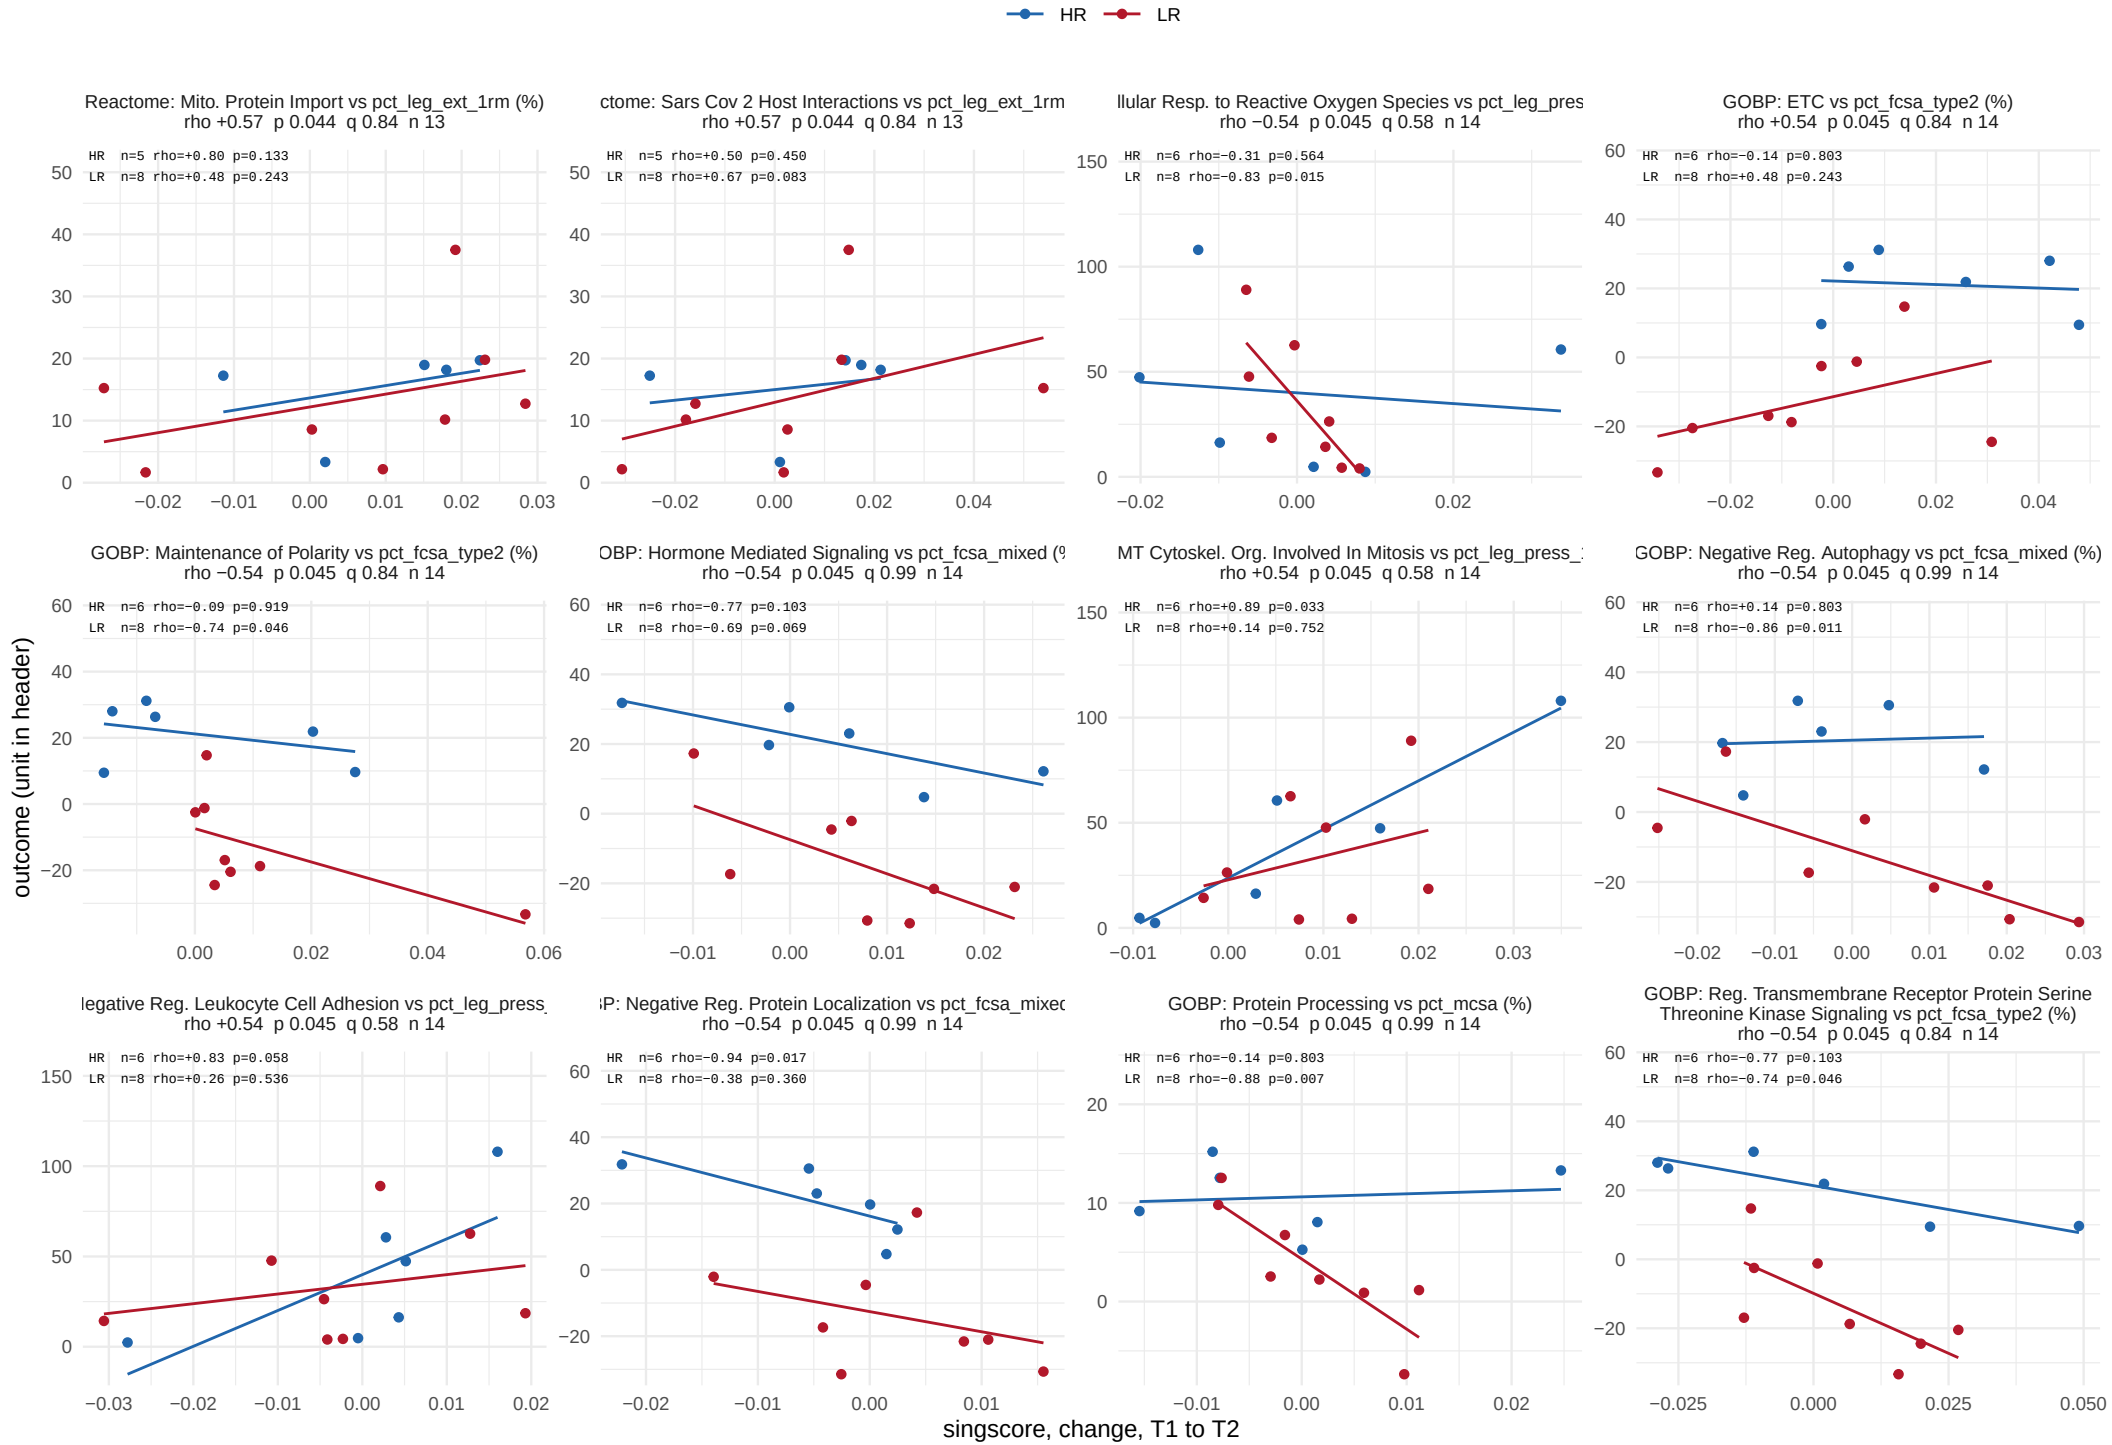


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, training window


456 of 11024 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 35 of 38.

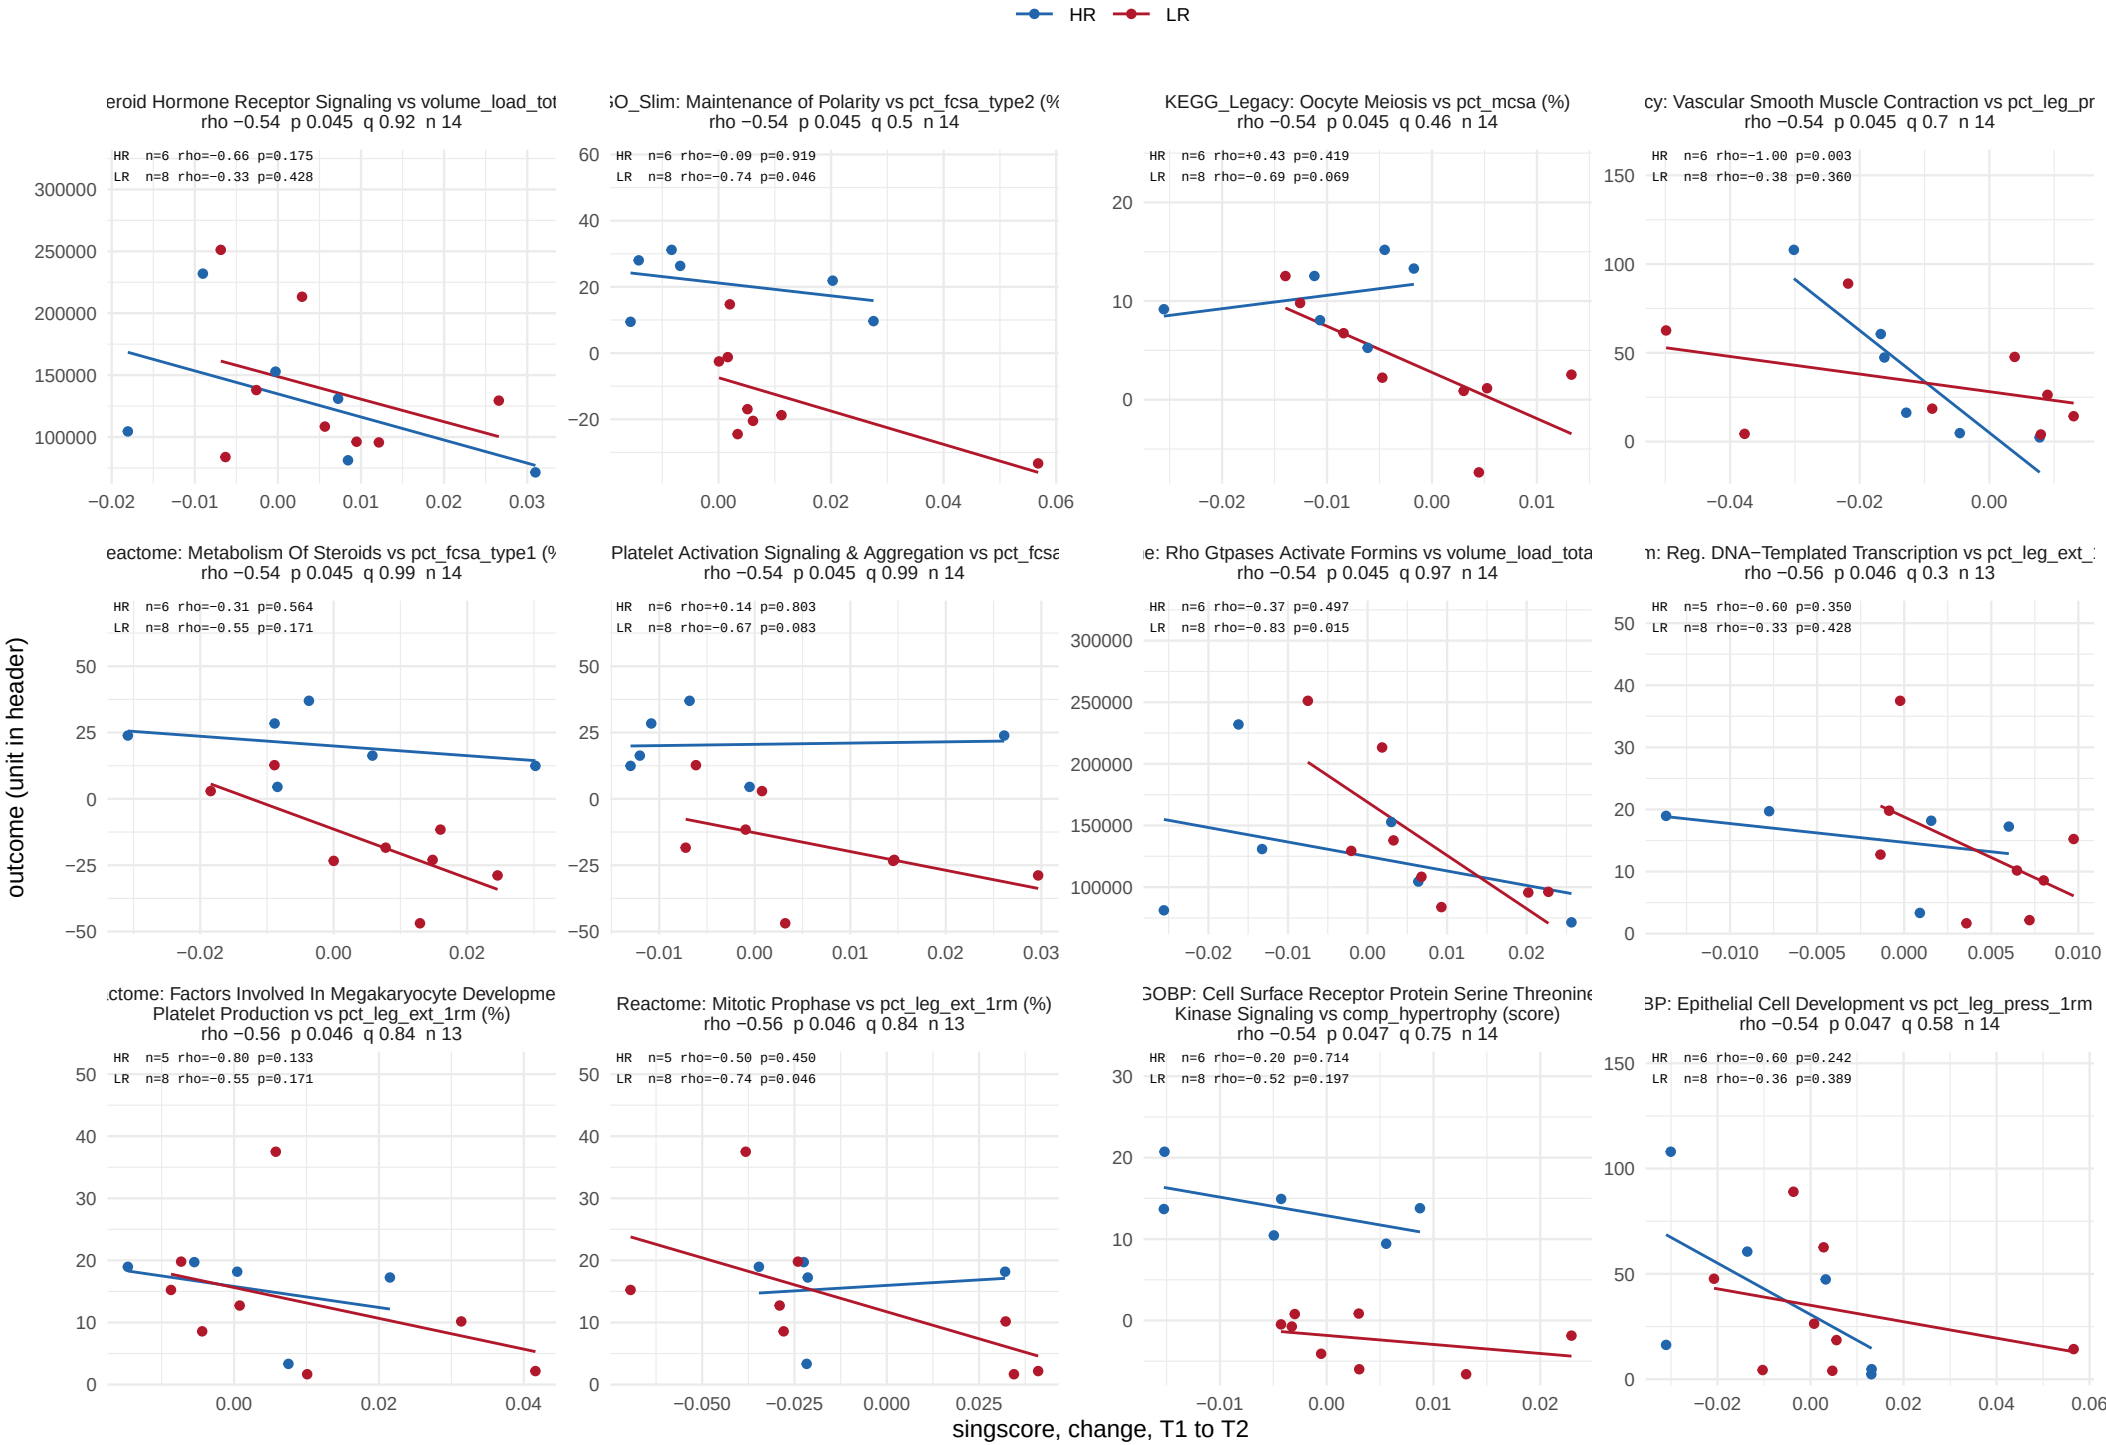


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, training window


456 of 11024 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 36 of 38.

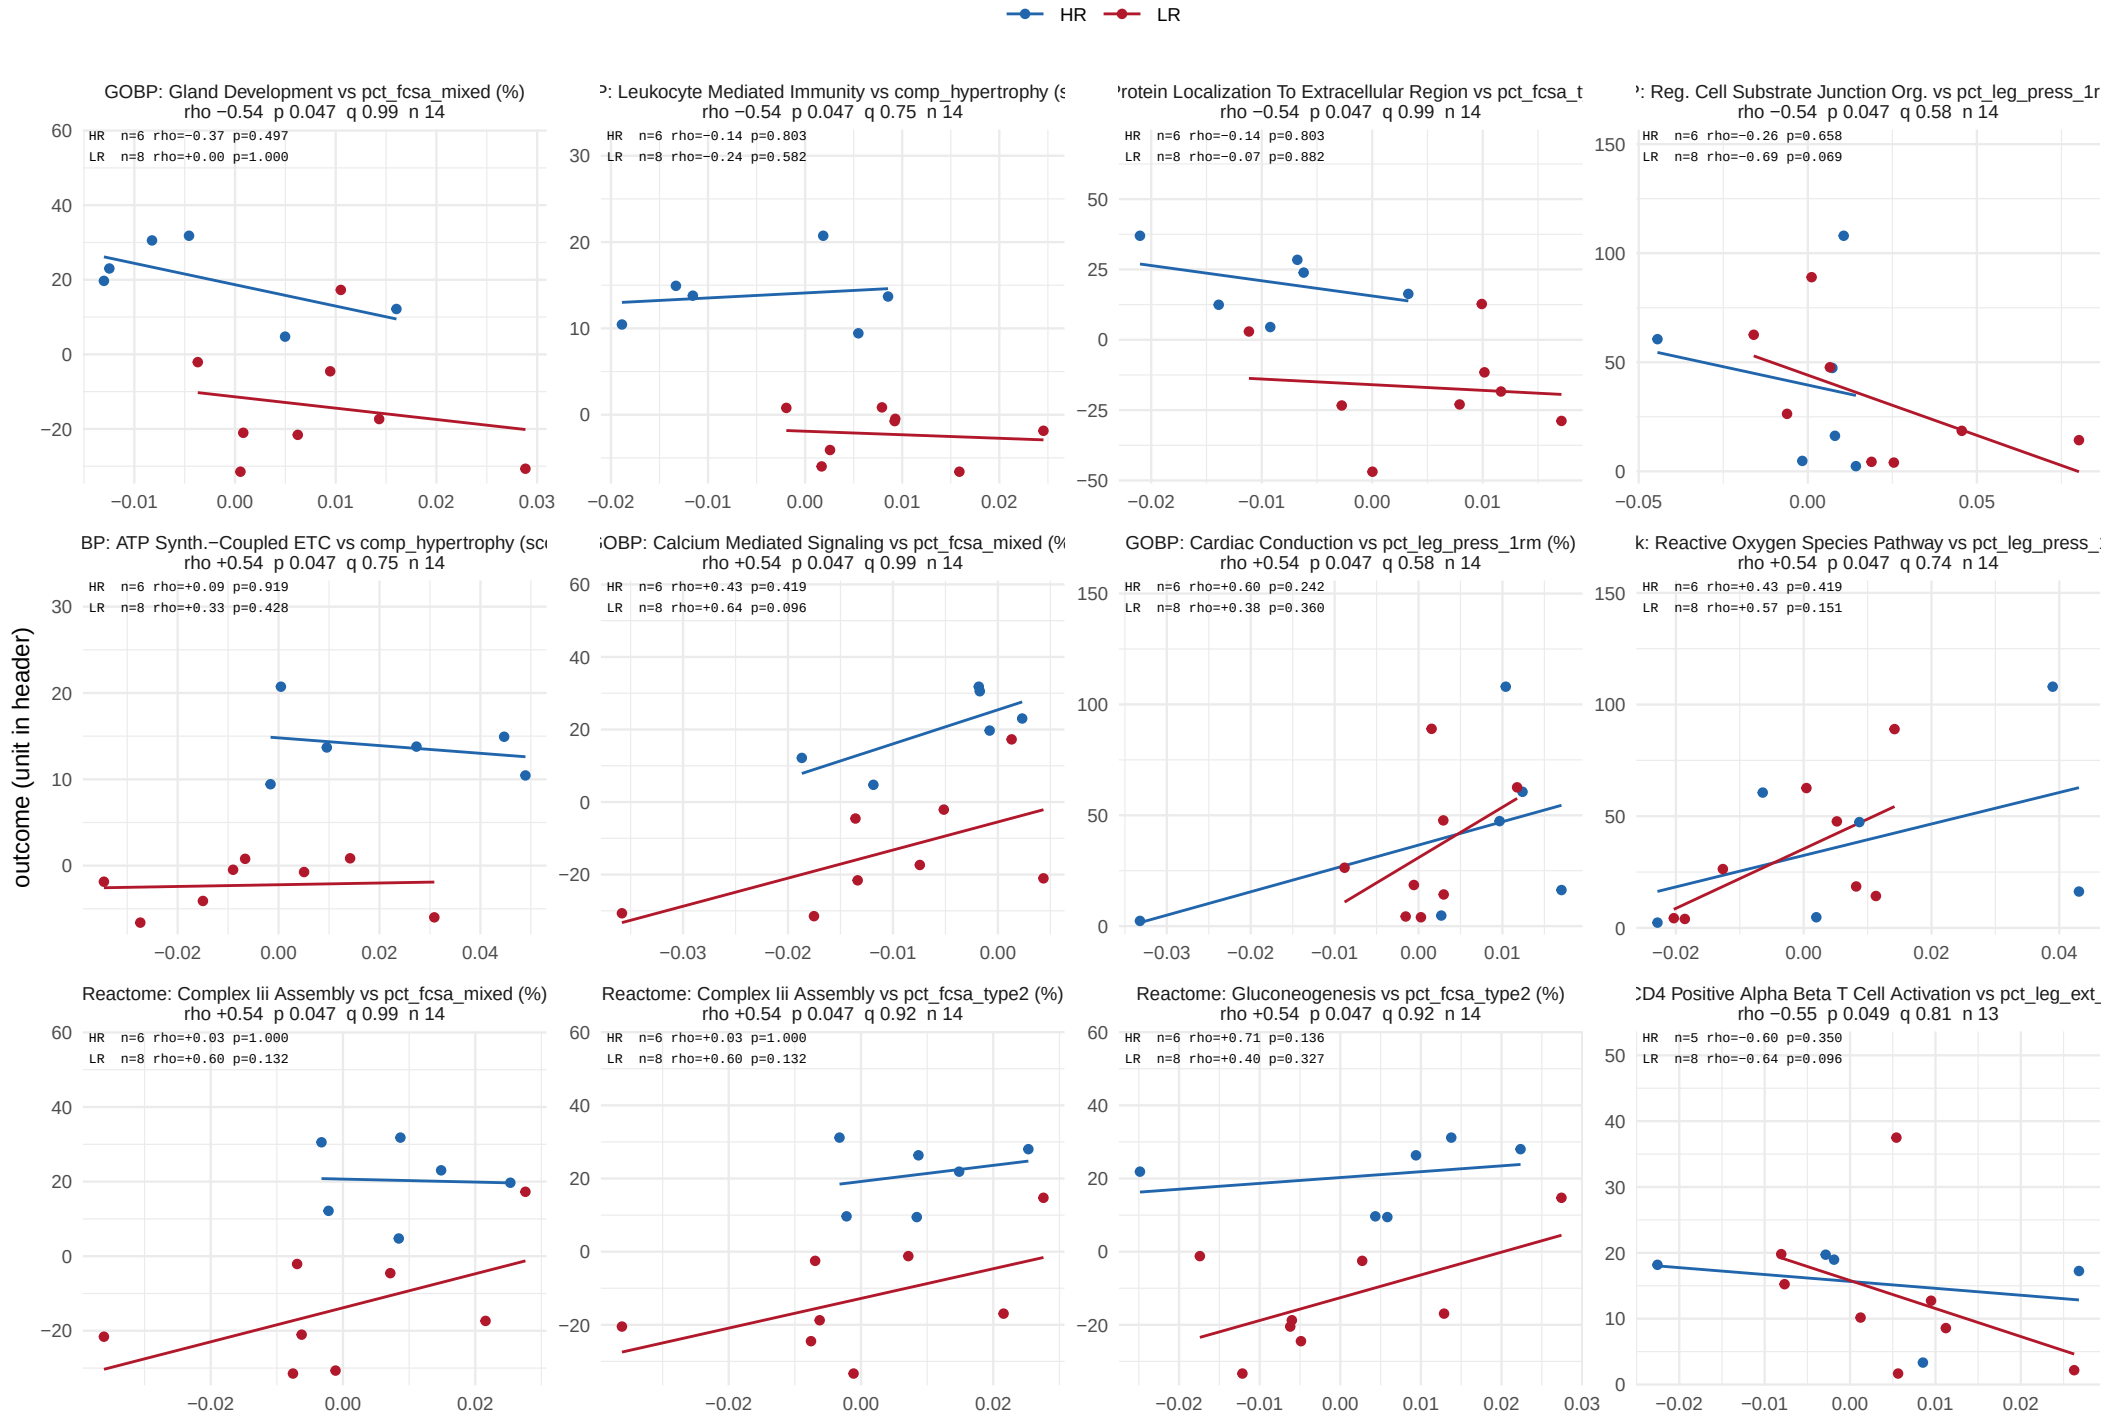


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

# Change score, training window


456 of 11024 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 37 of 38.

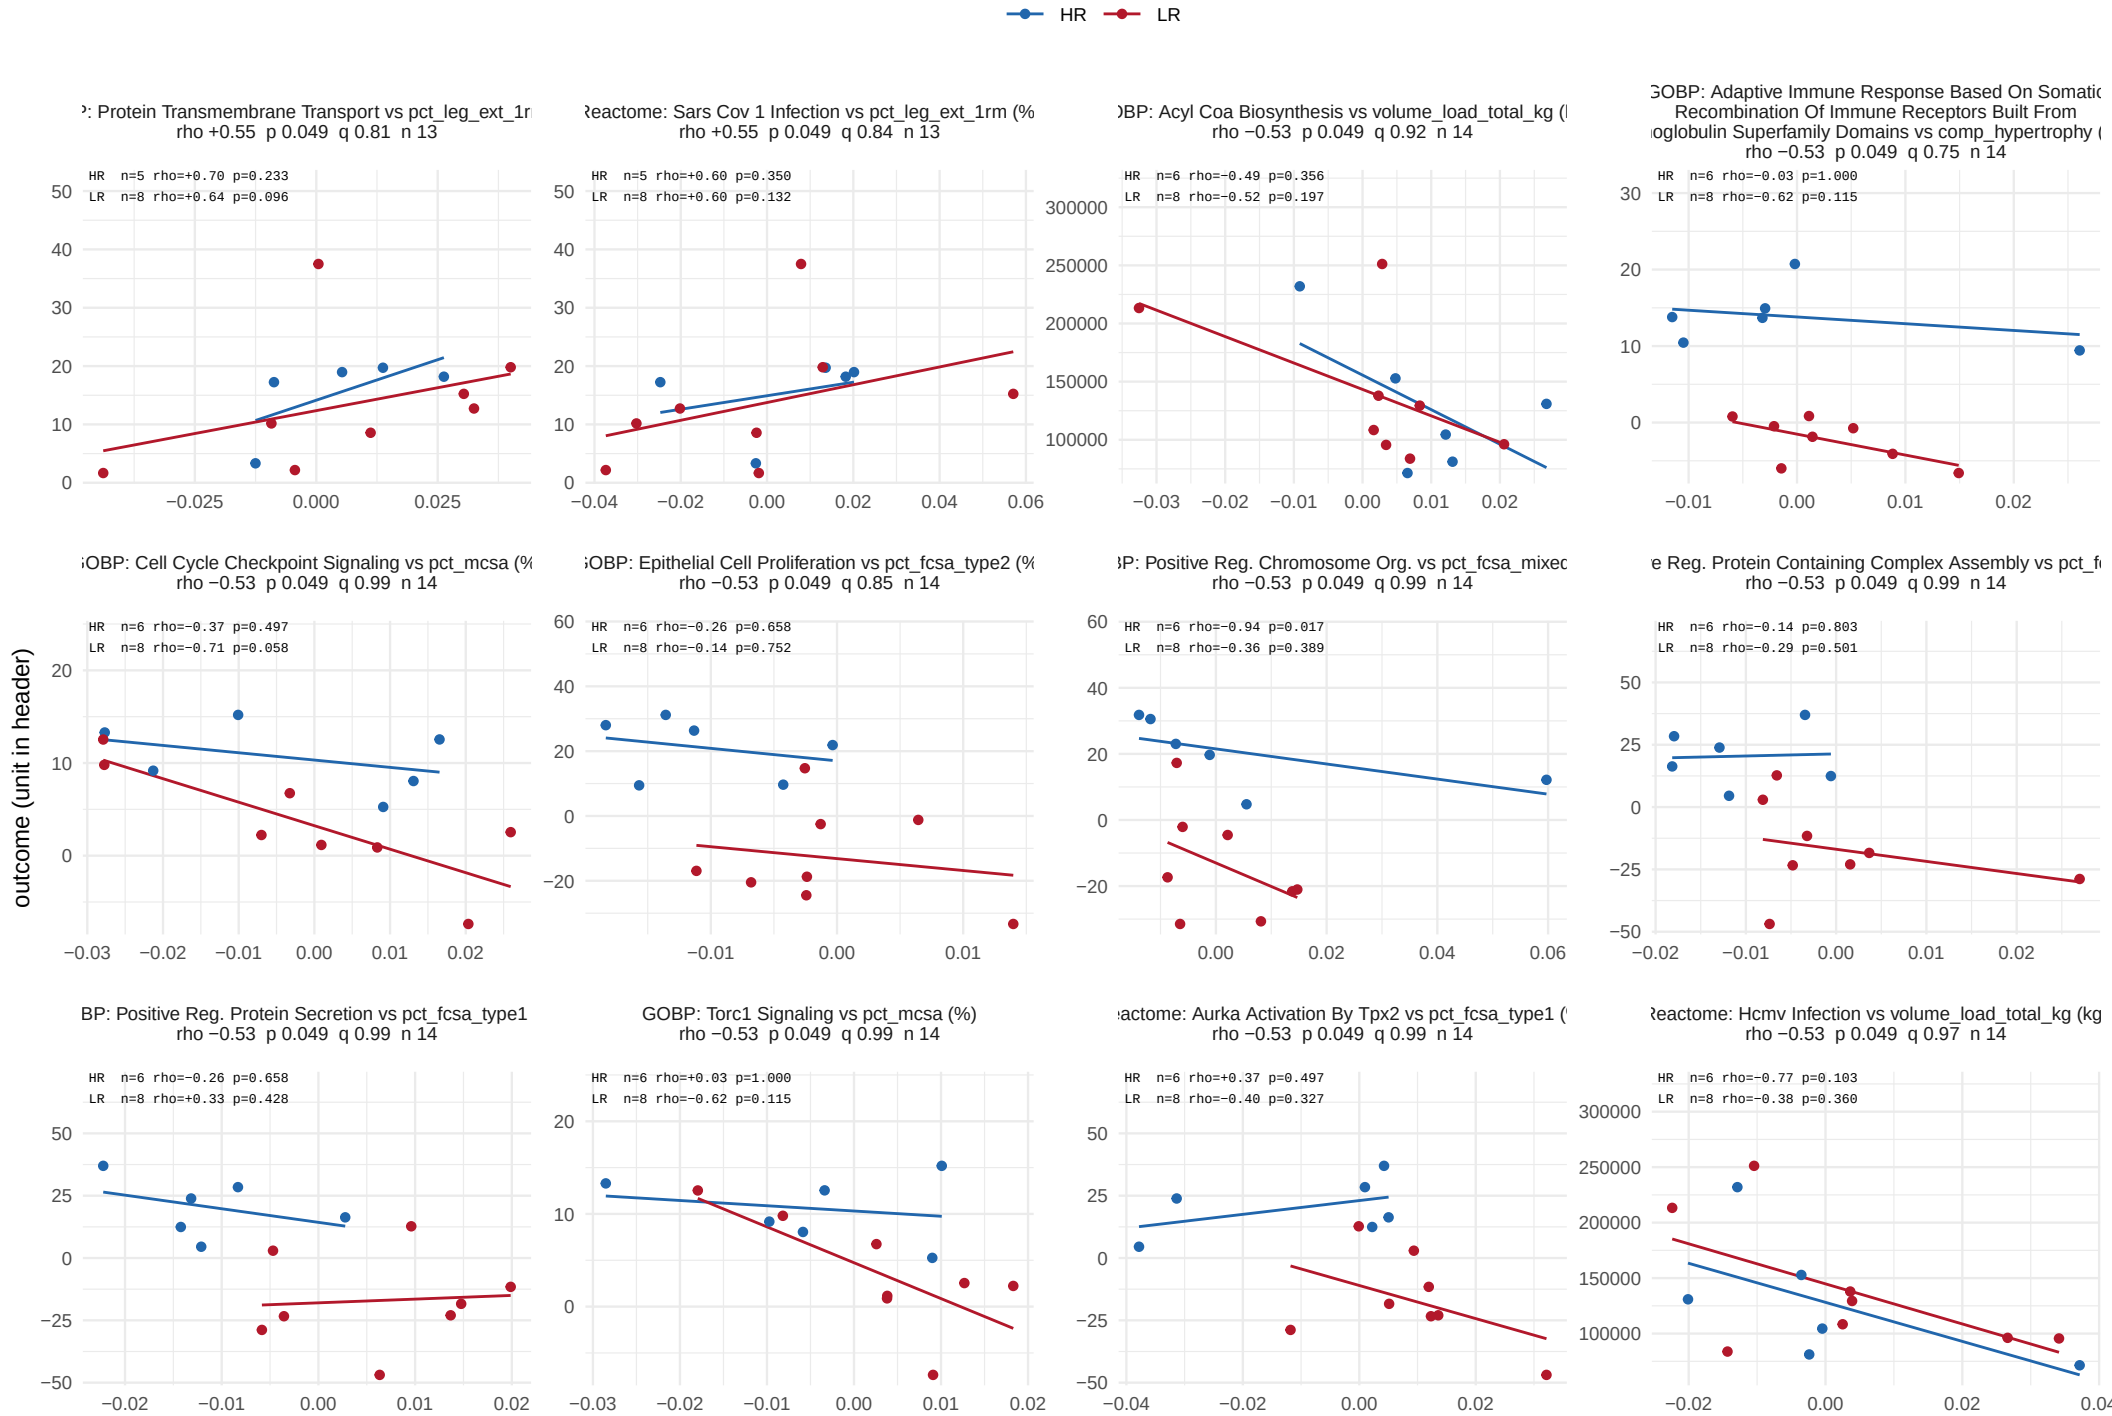


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, training window


456 of 11024 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 38 of 38.

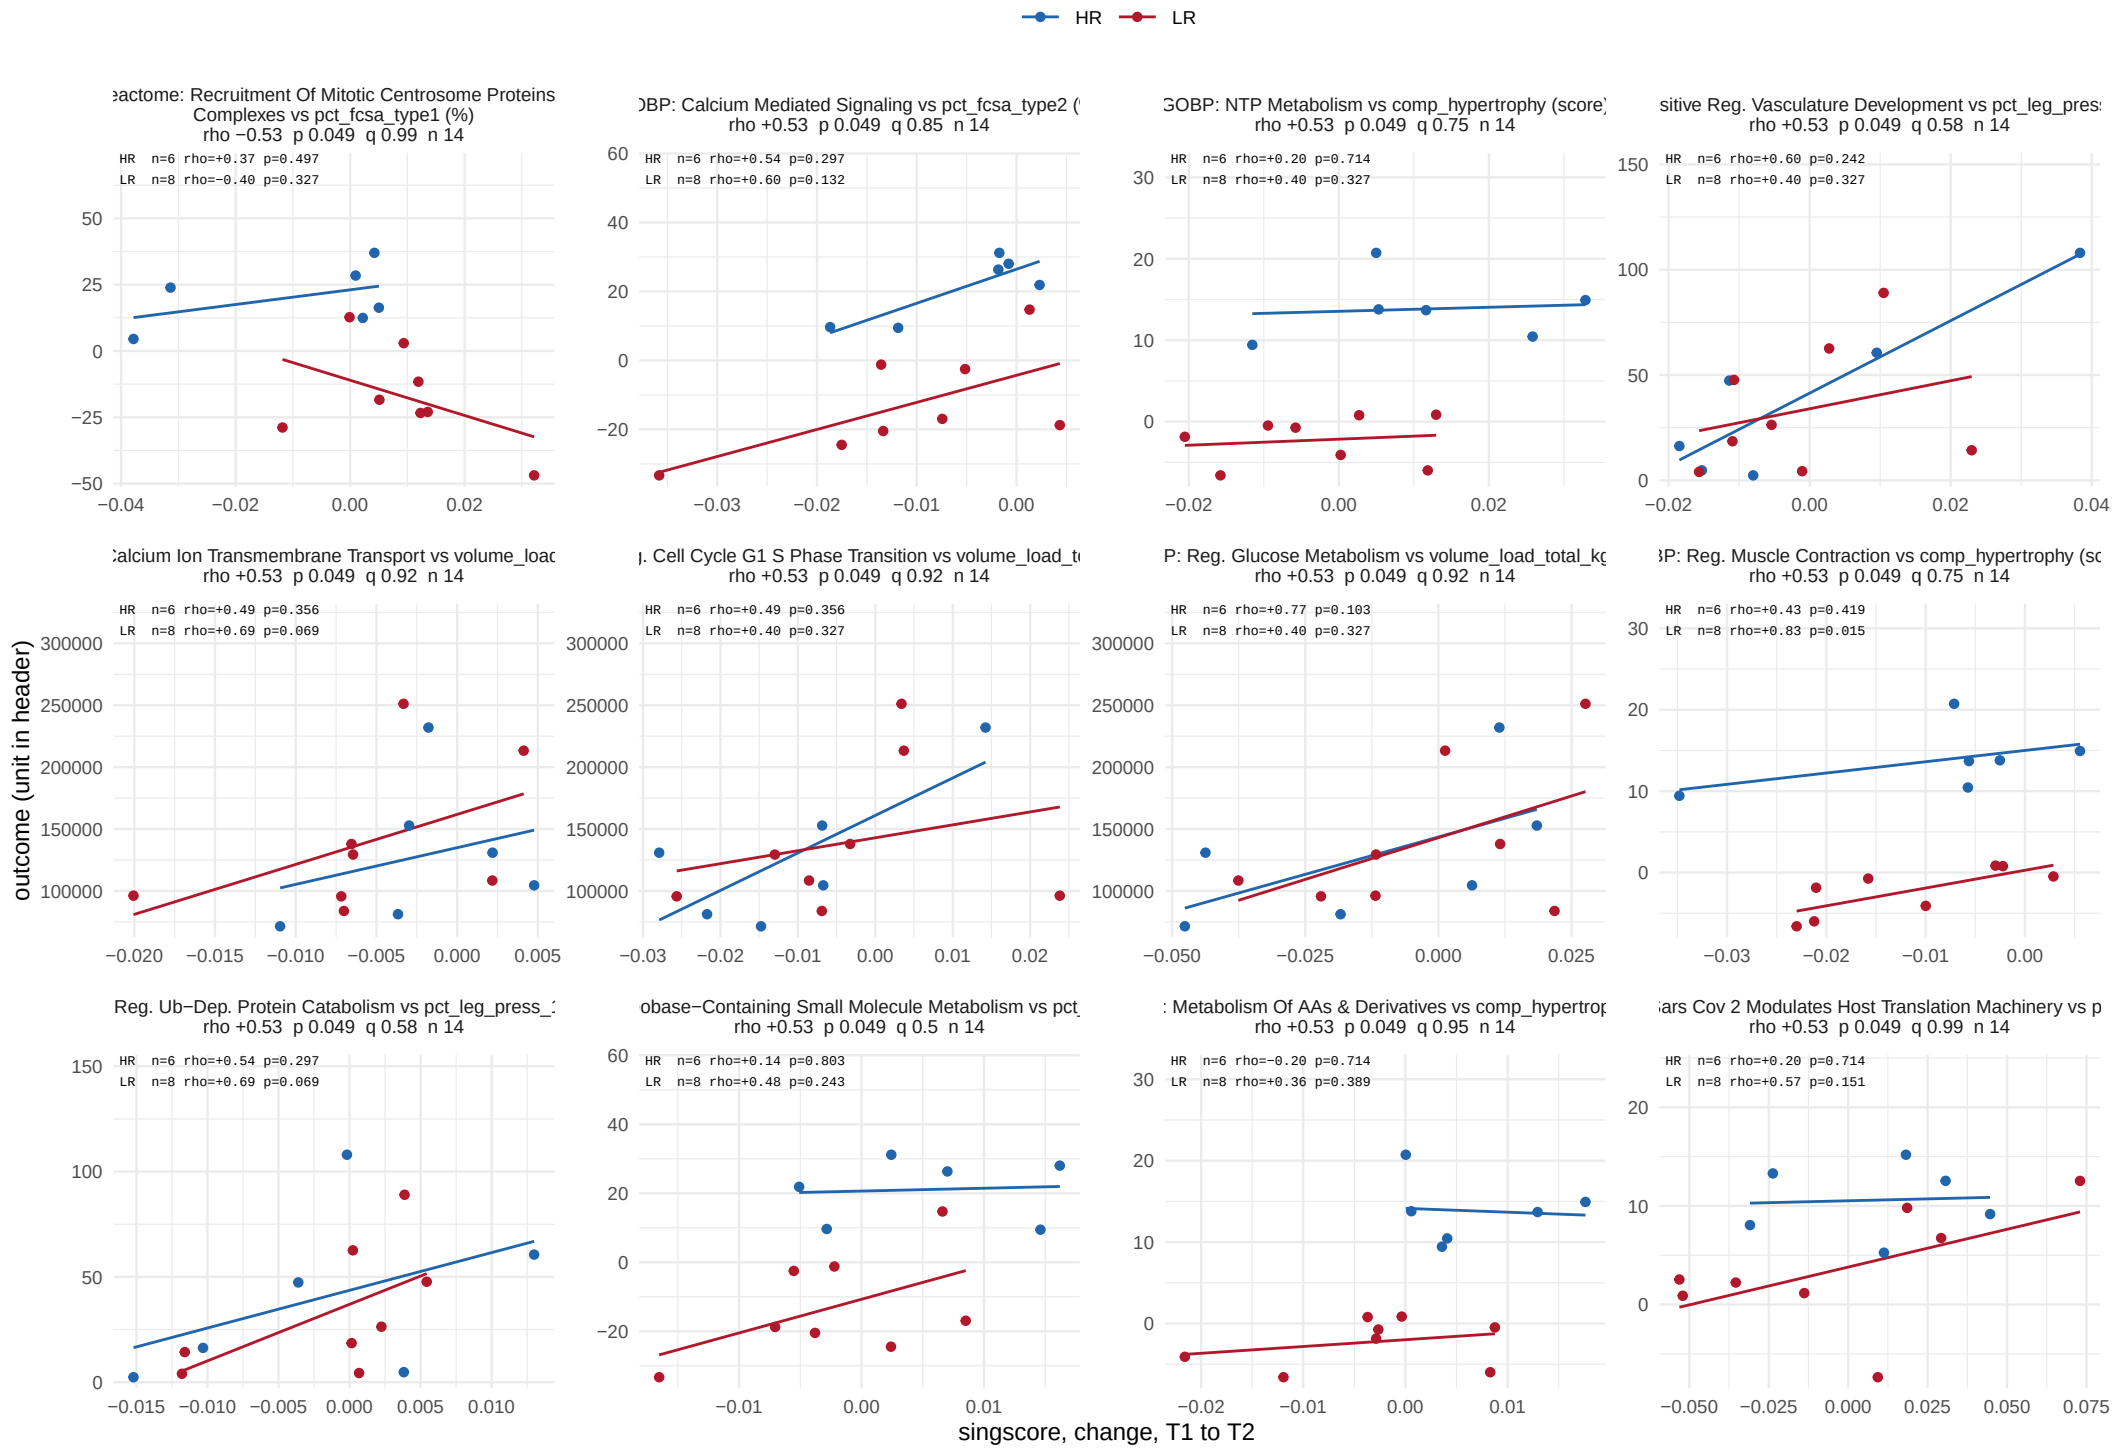


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, baseline window


626 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 1 of 53.

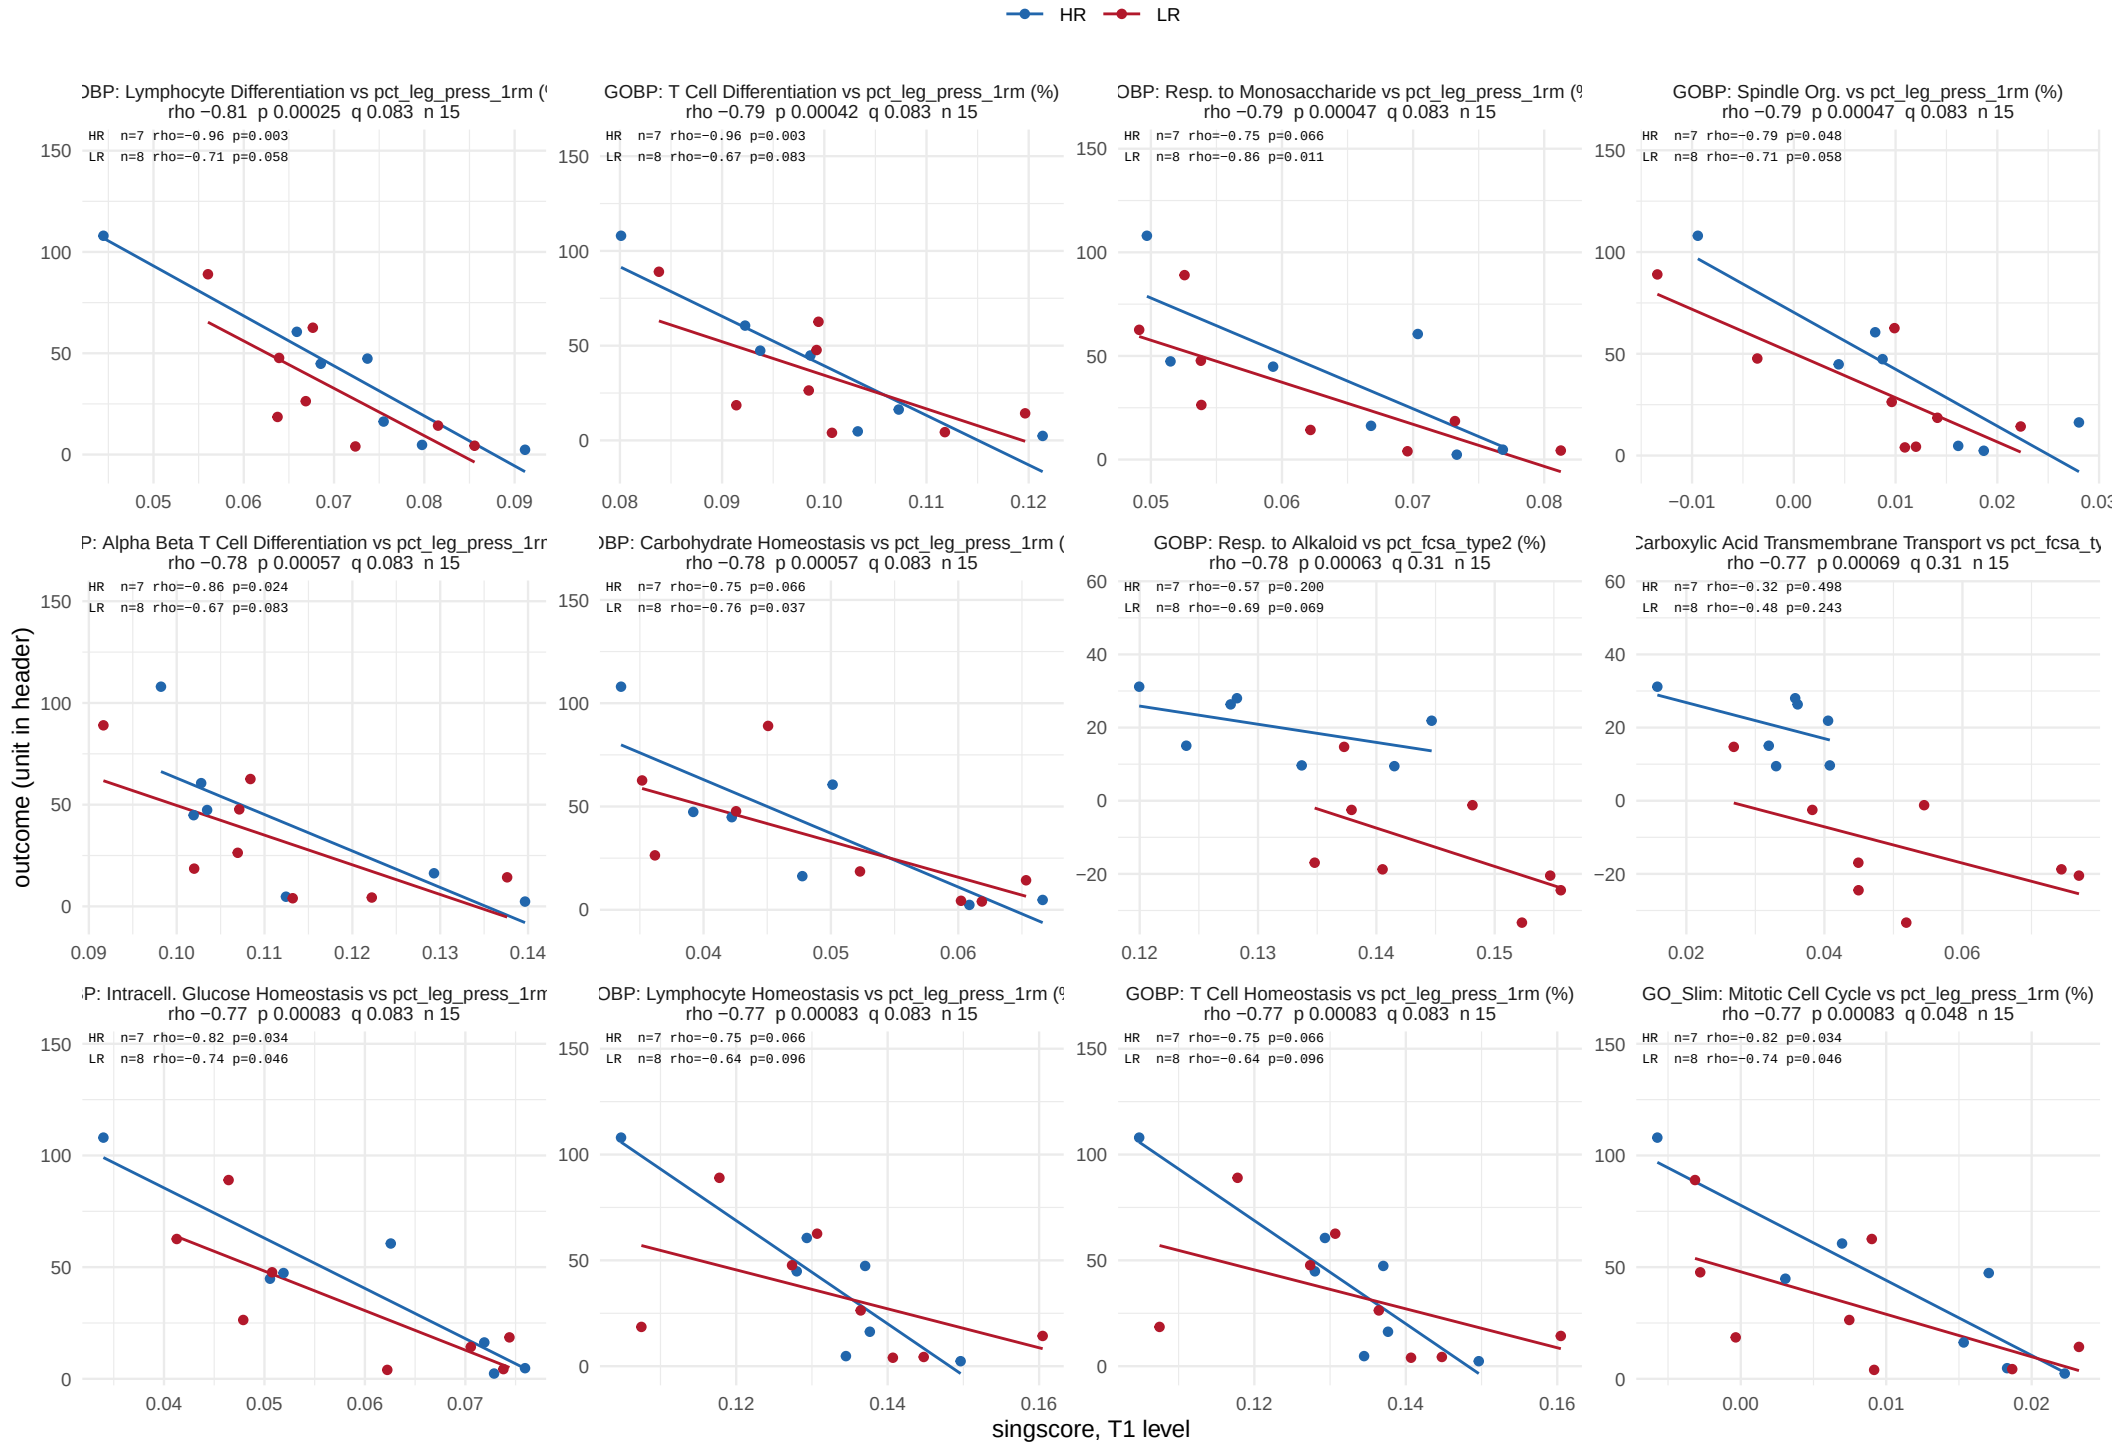


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, baseline window


626 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 2 of 53.

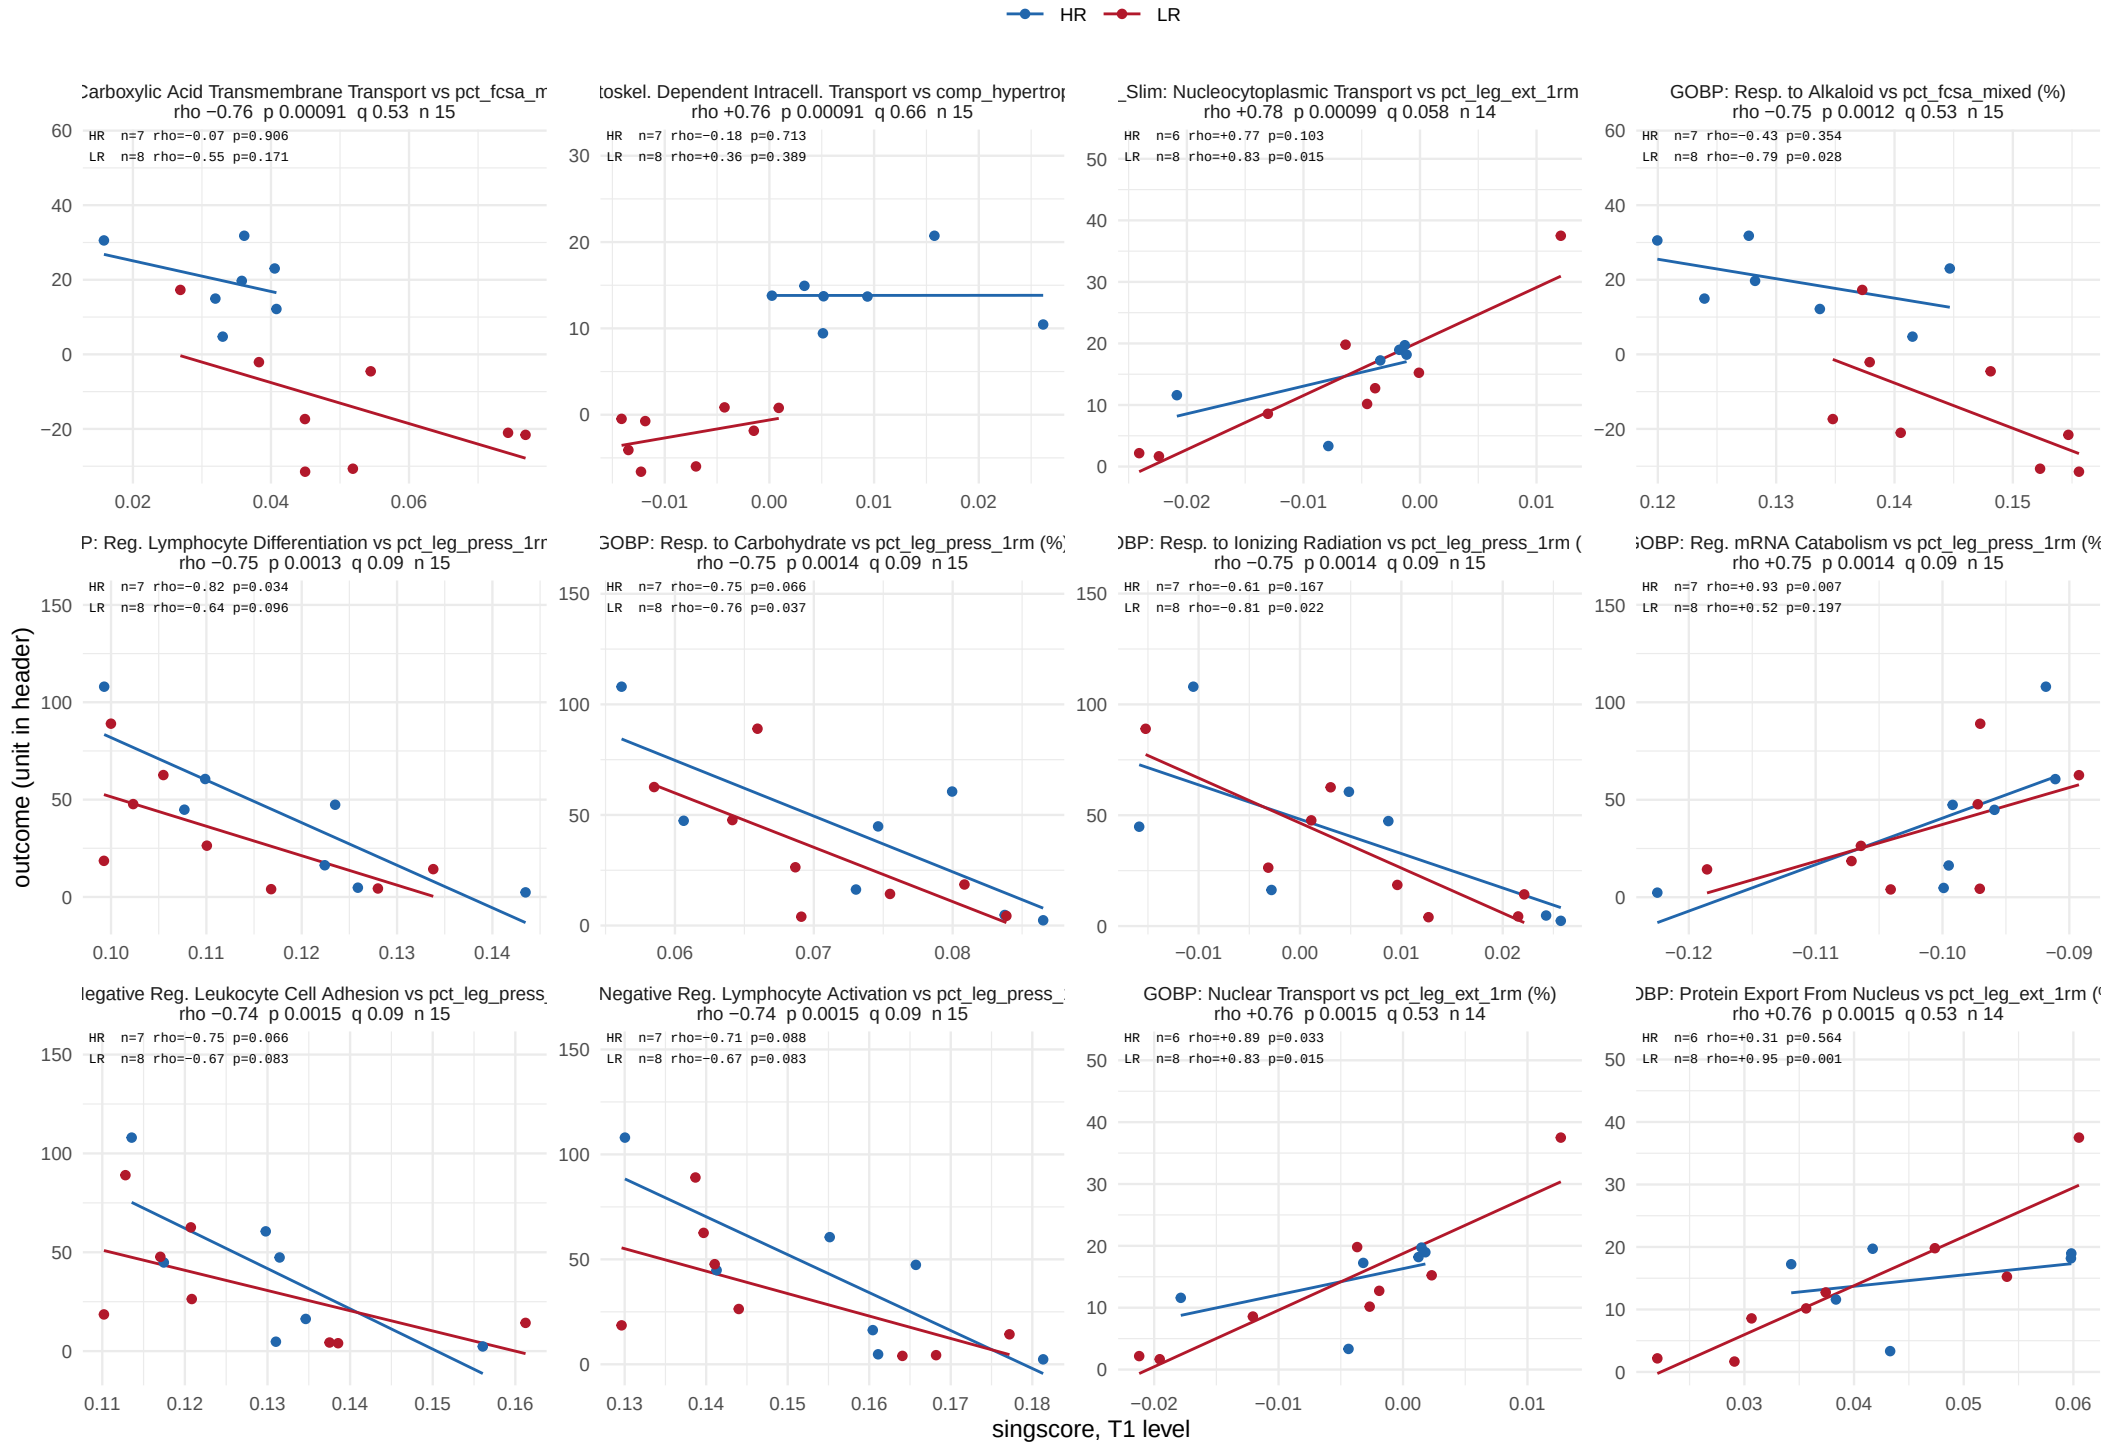


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, baseline window


626 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 3 of 53.

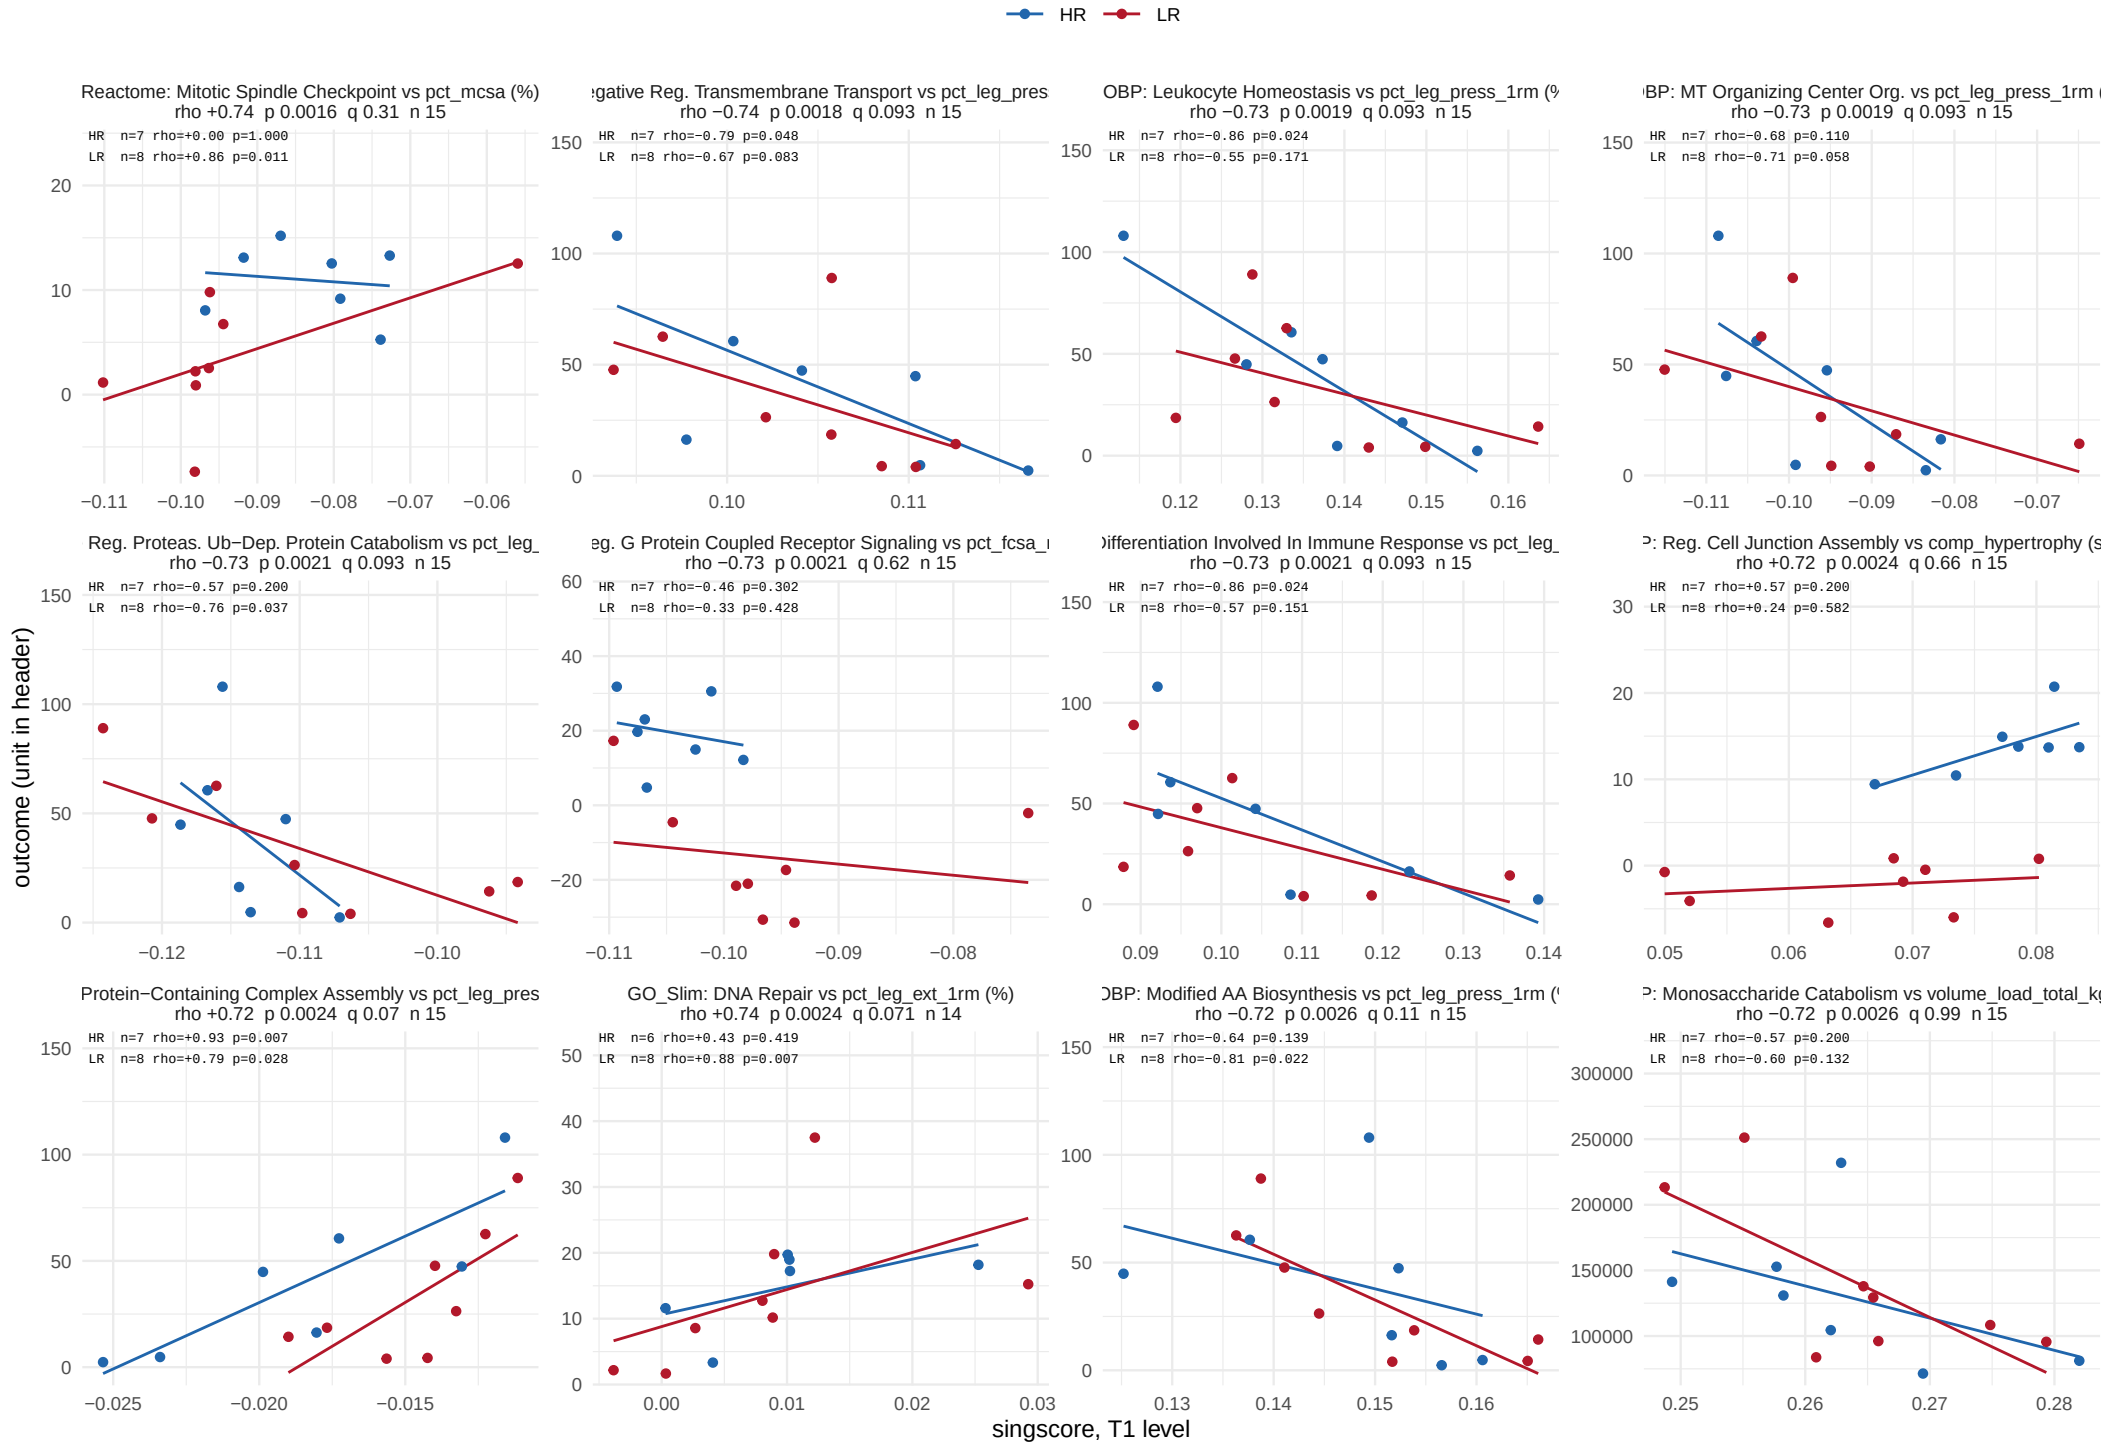


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, baseline window


626 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 4 of 53.

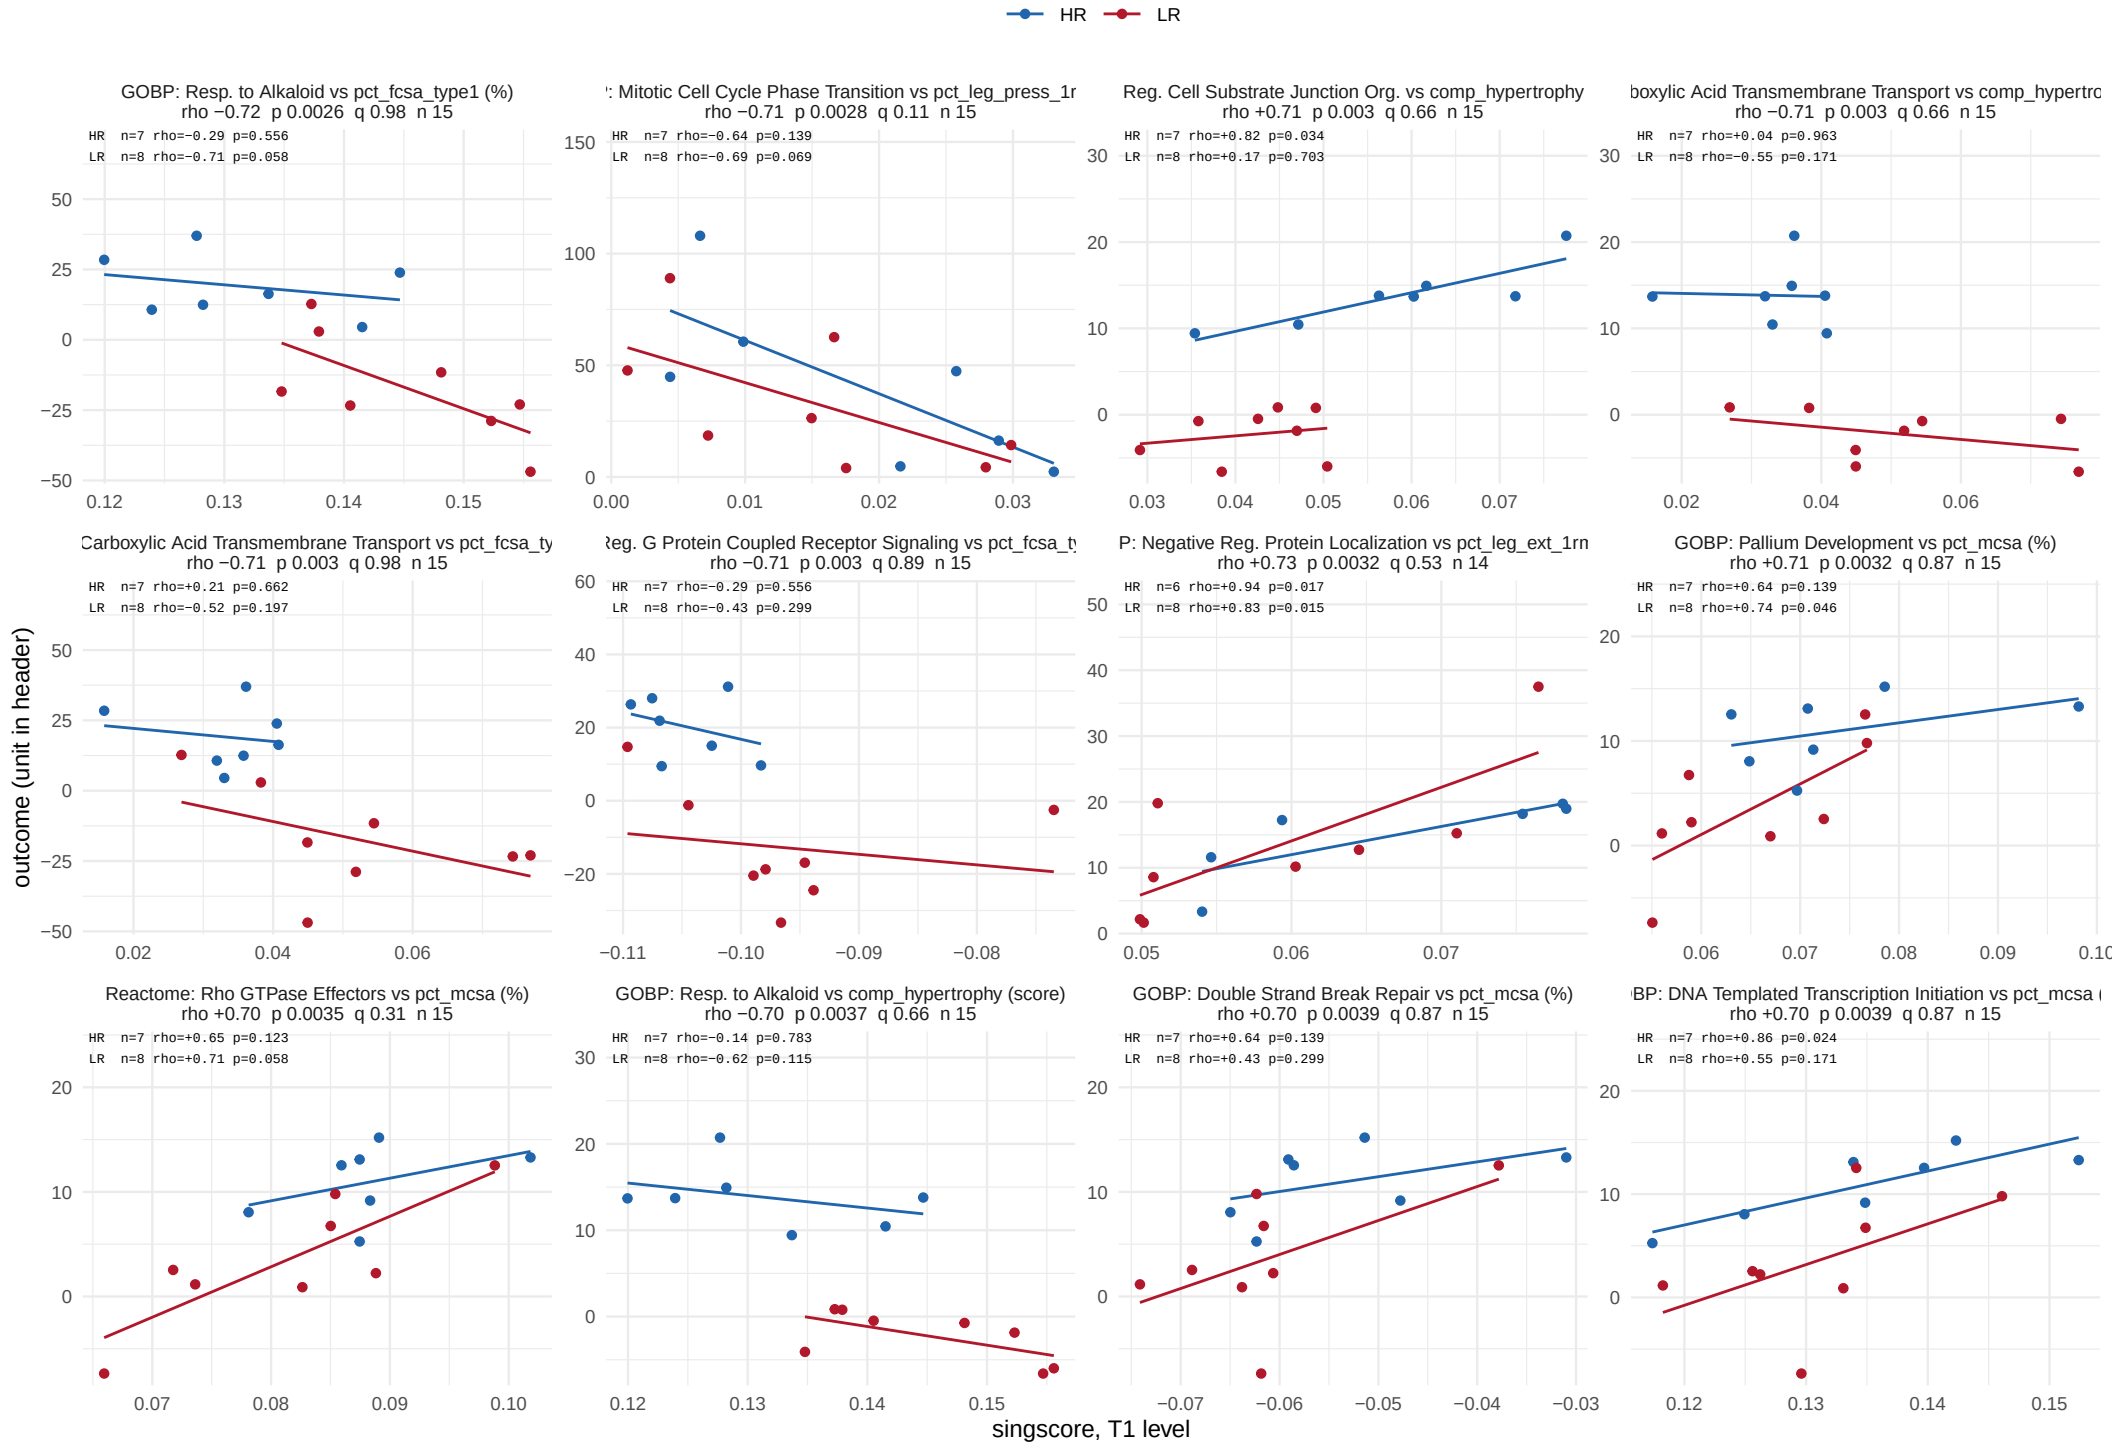


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, baseline window


626 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 5 of 53.

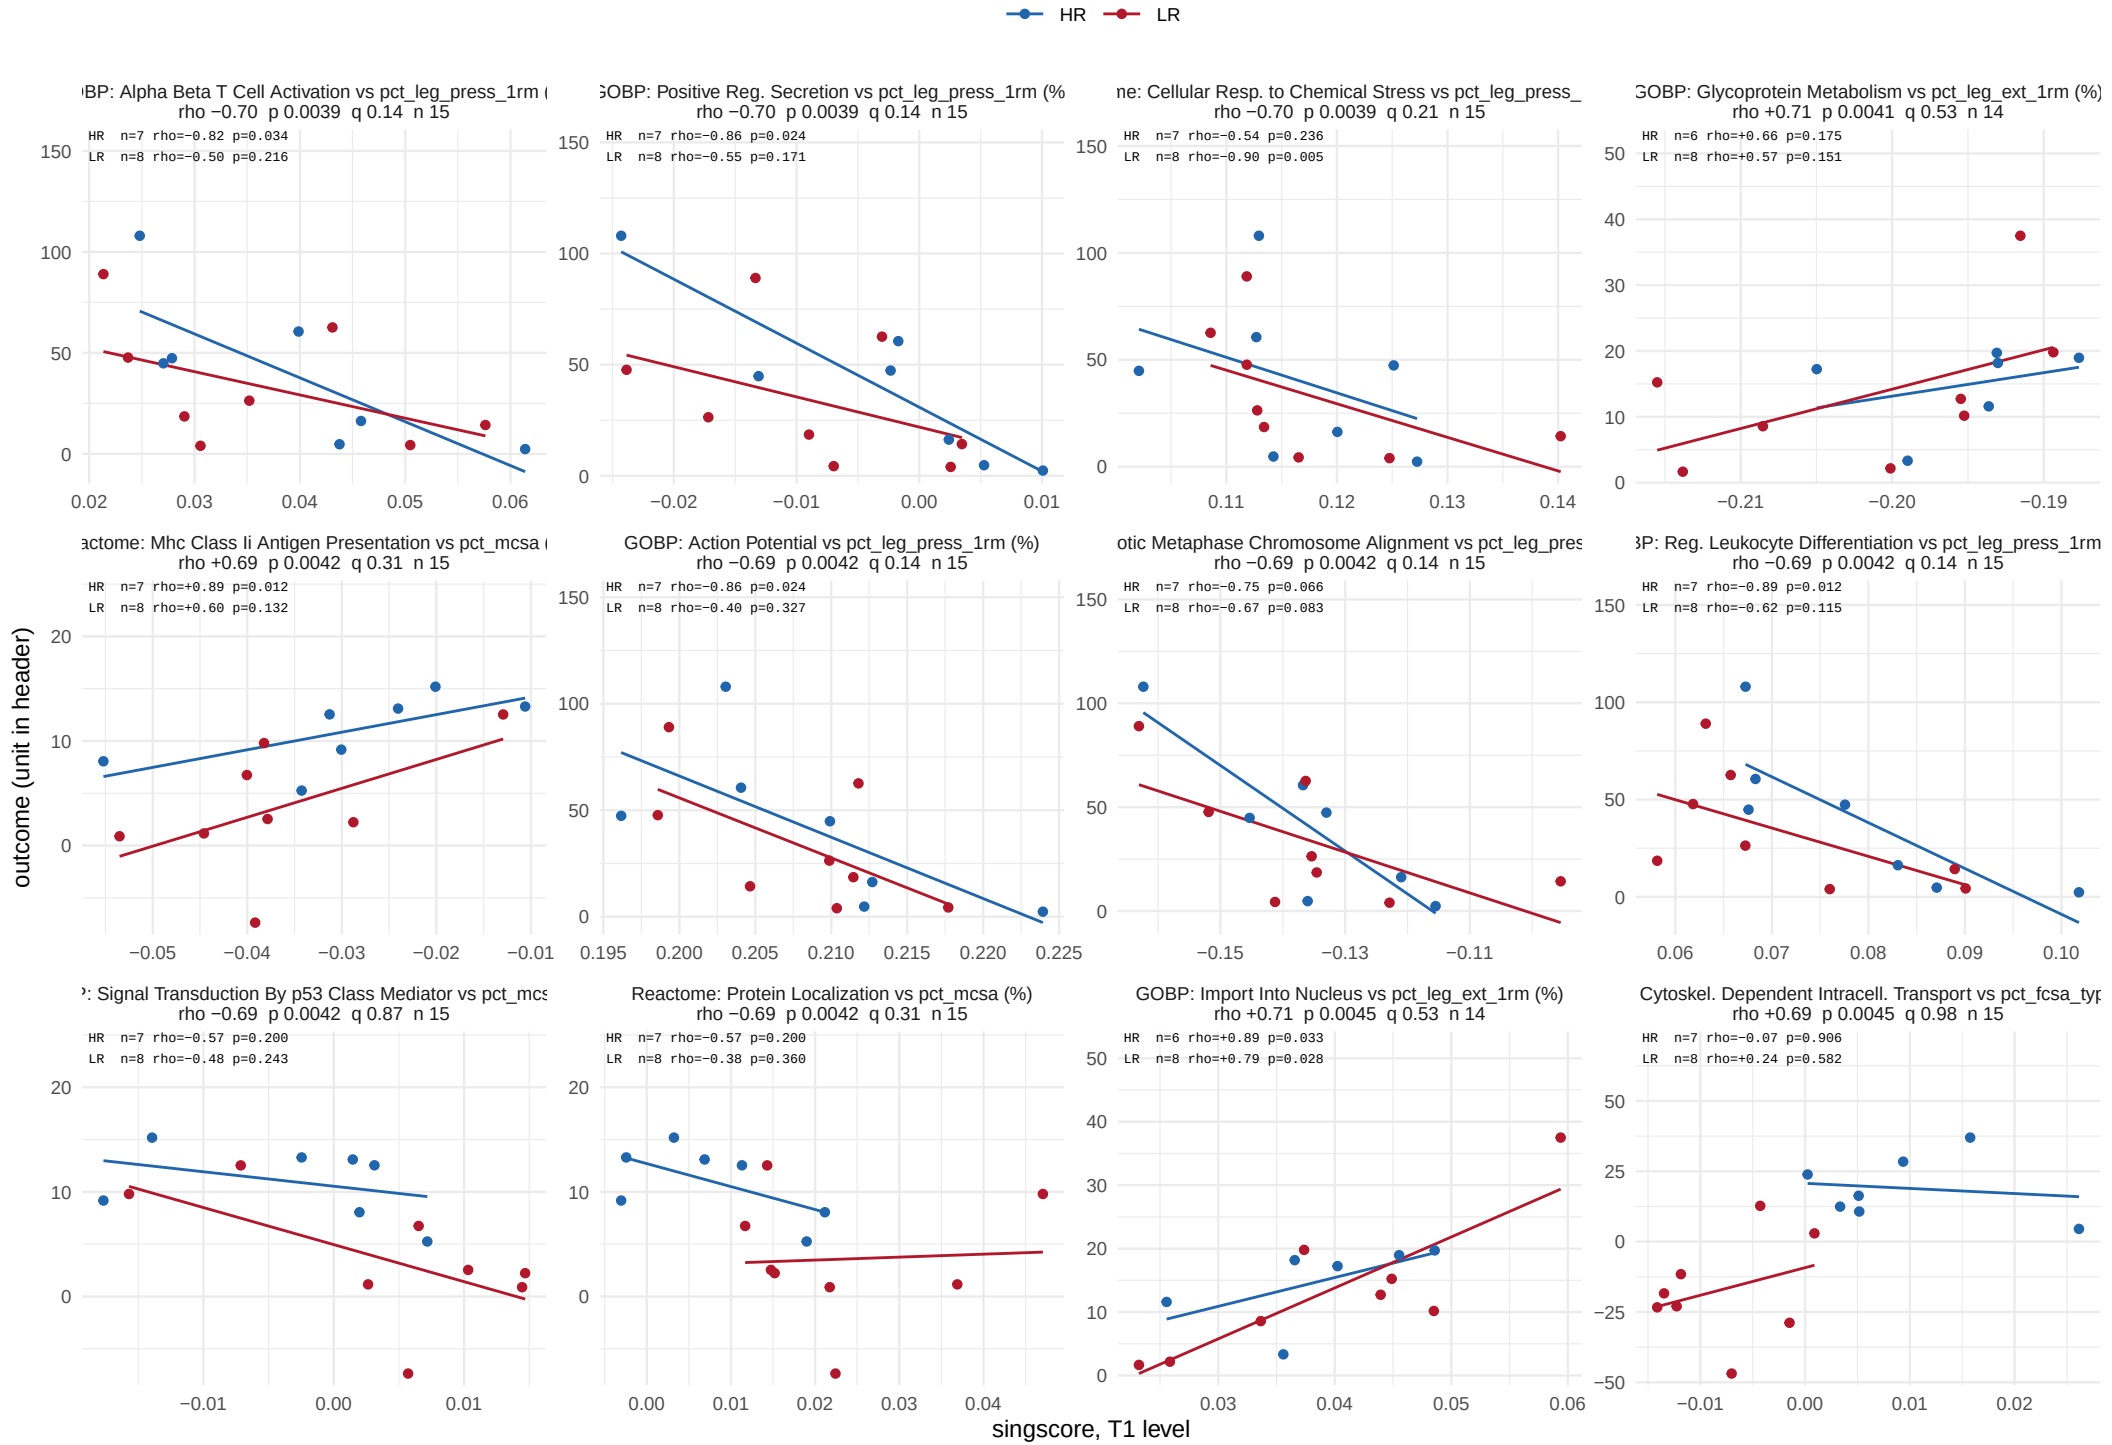


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, baseline window


626 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 6 of 53.

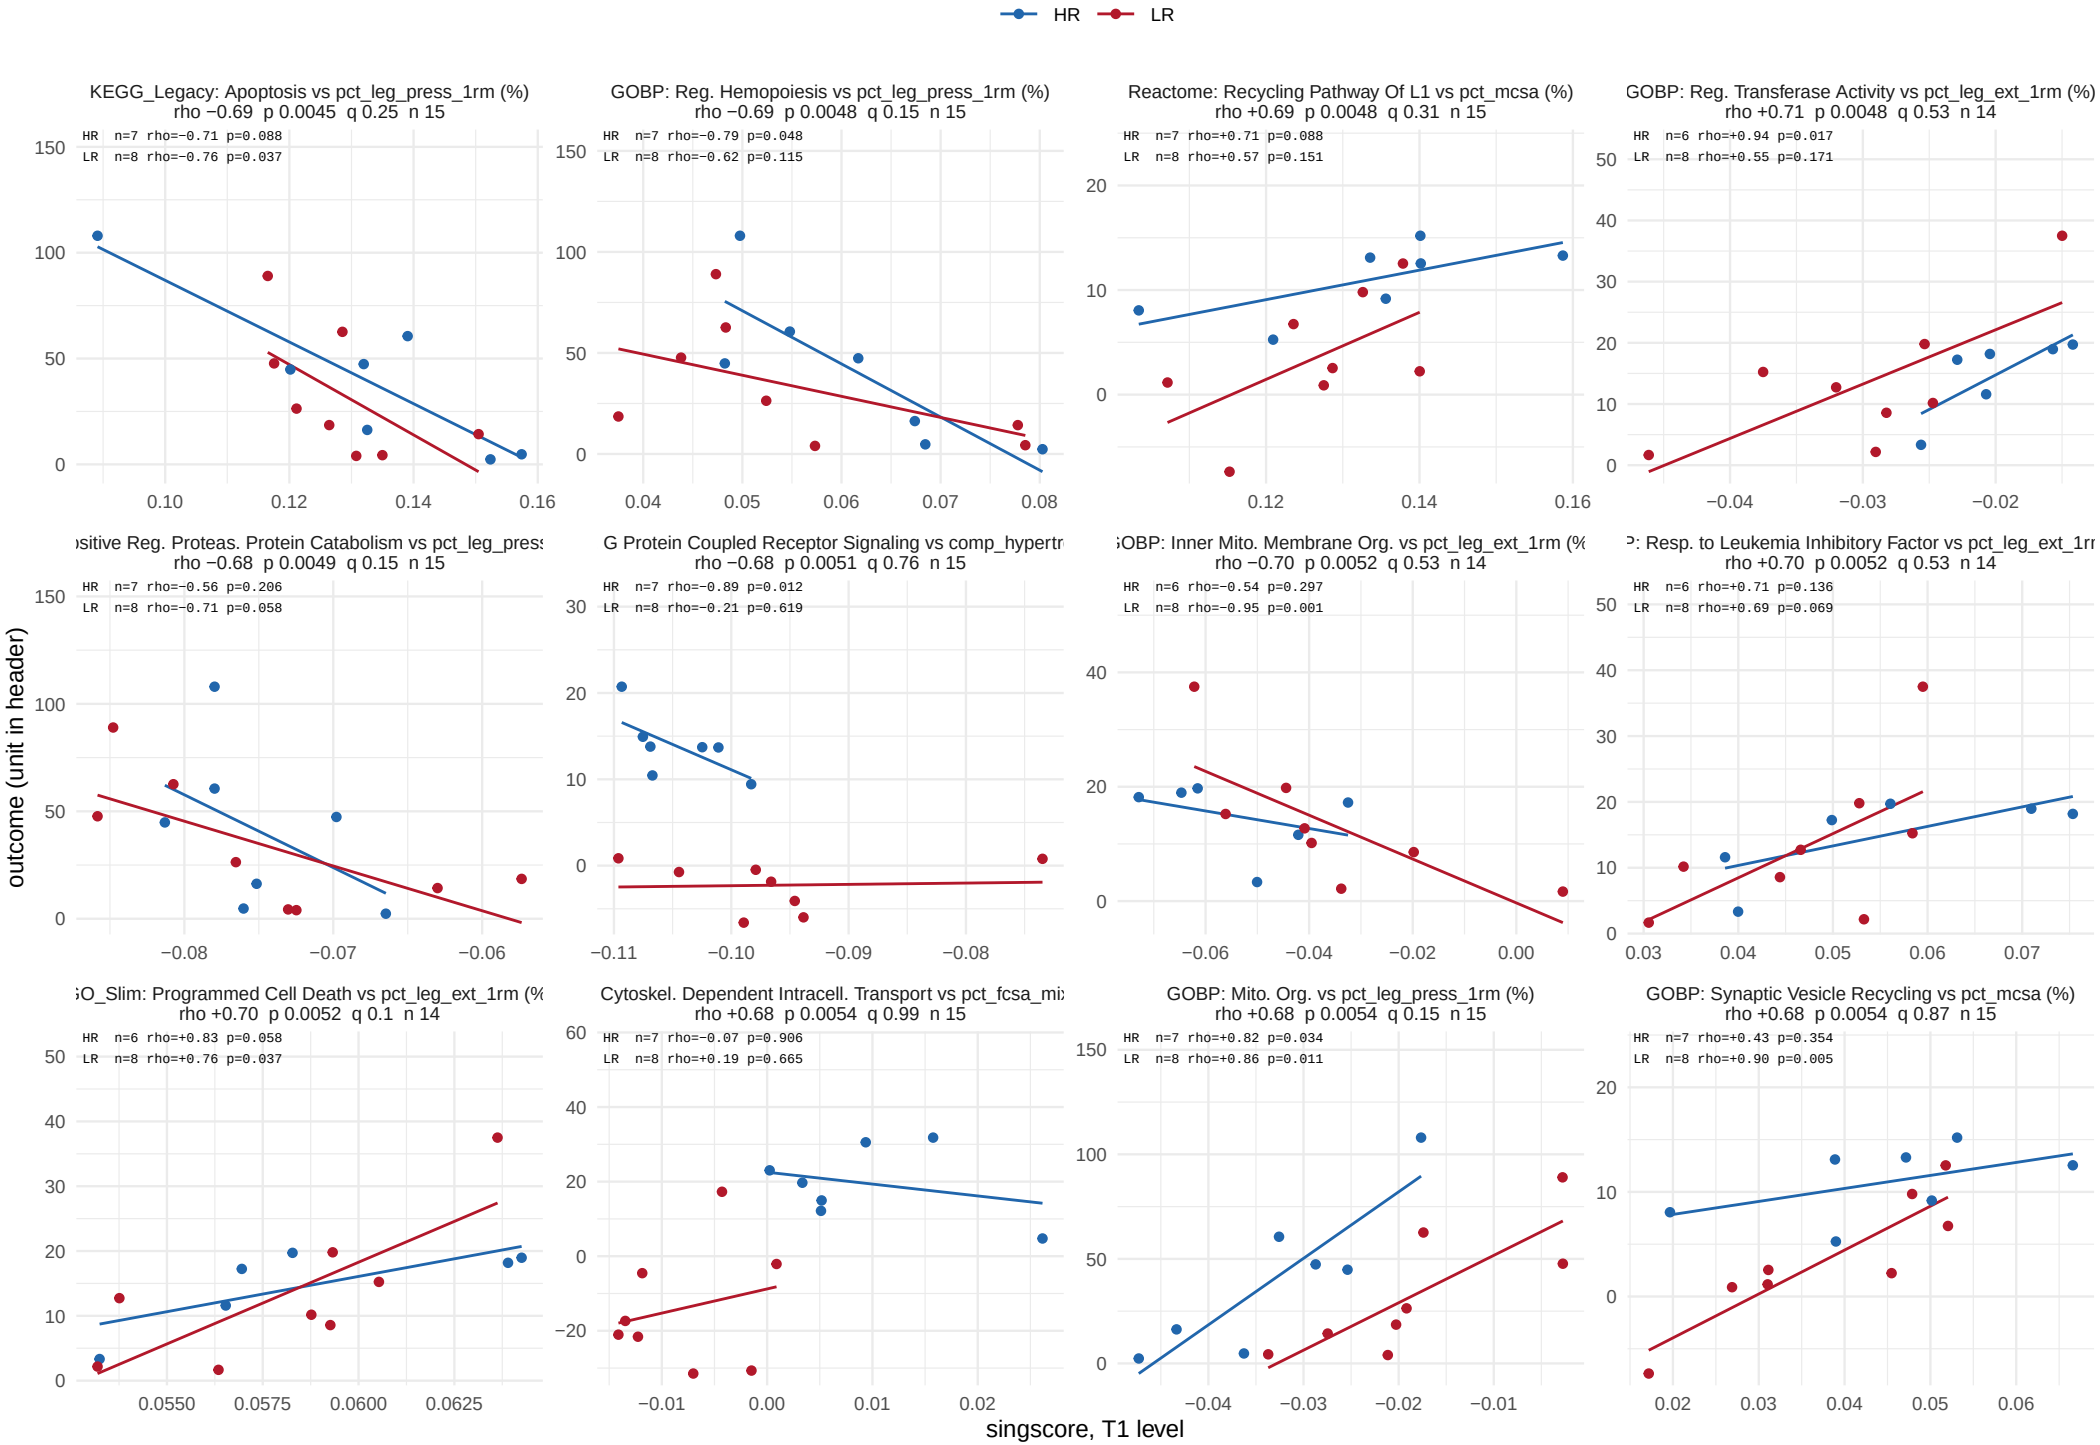


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, baseline window


626 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 7 of 53.

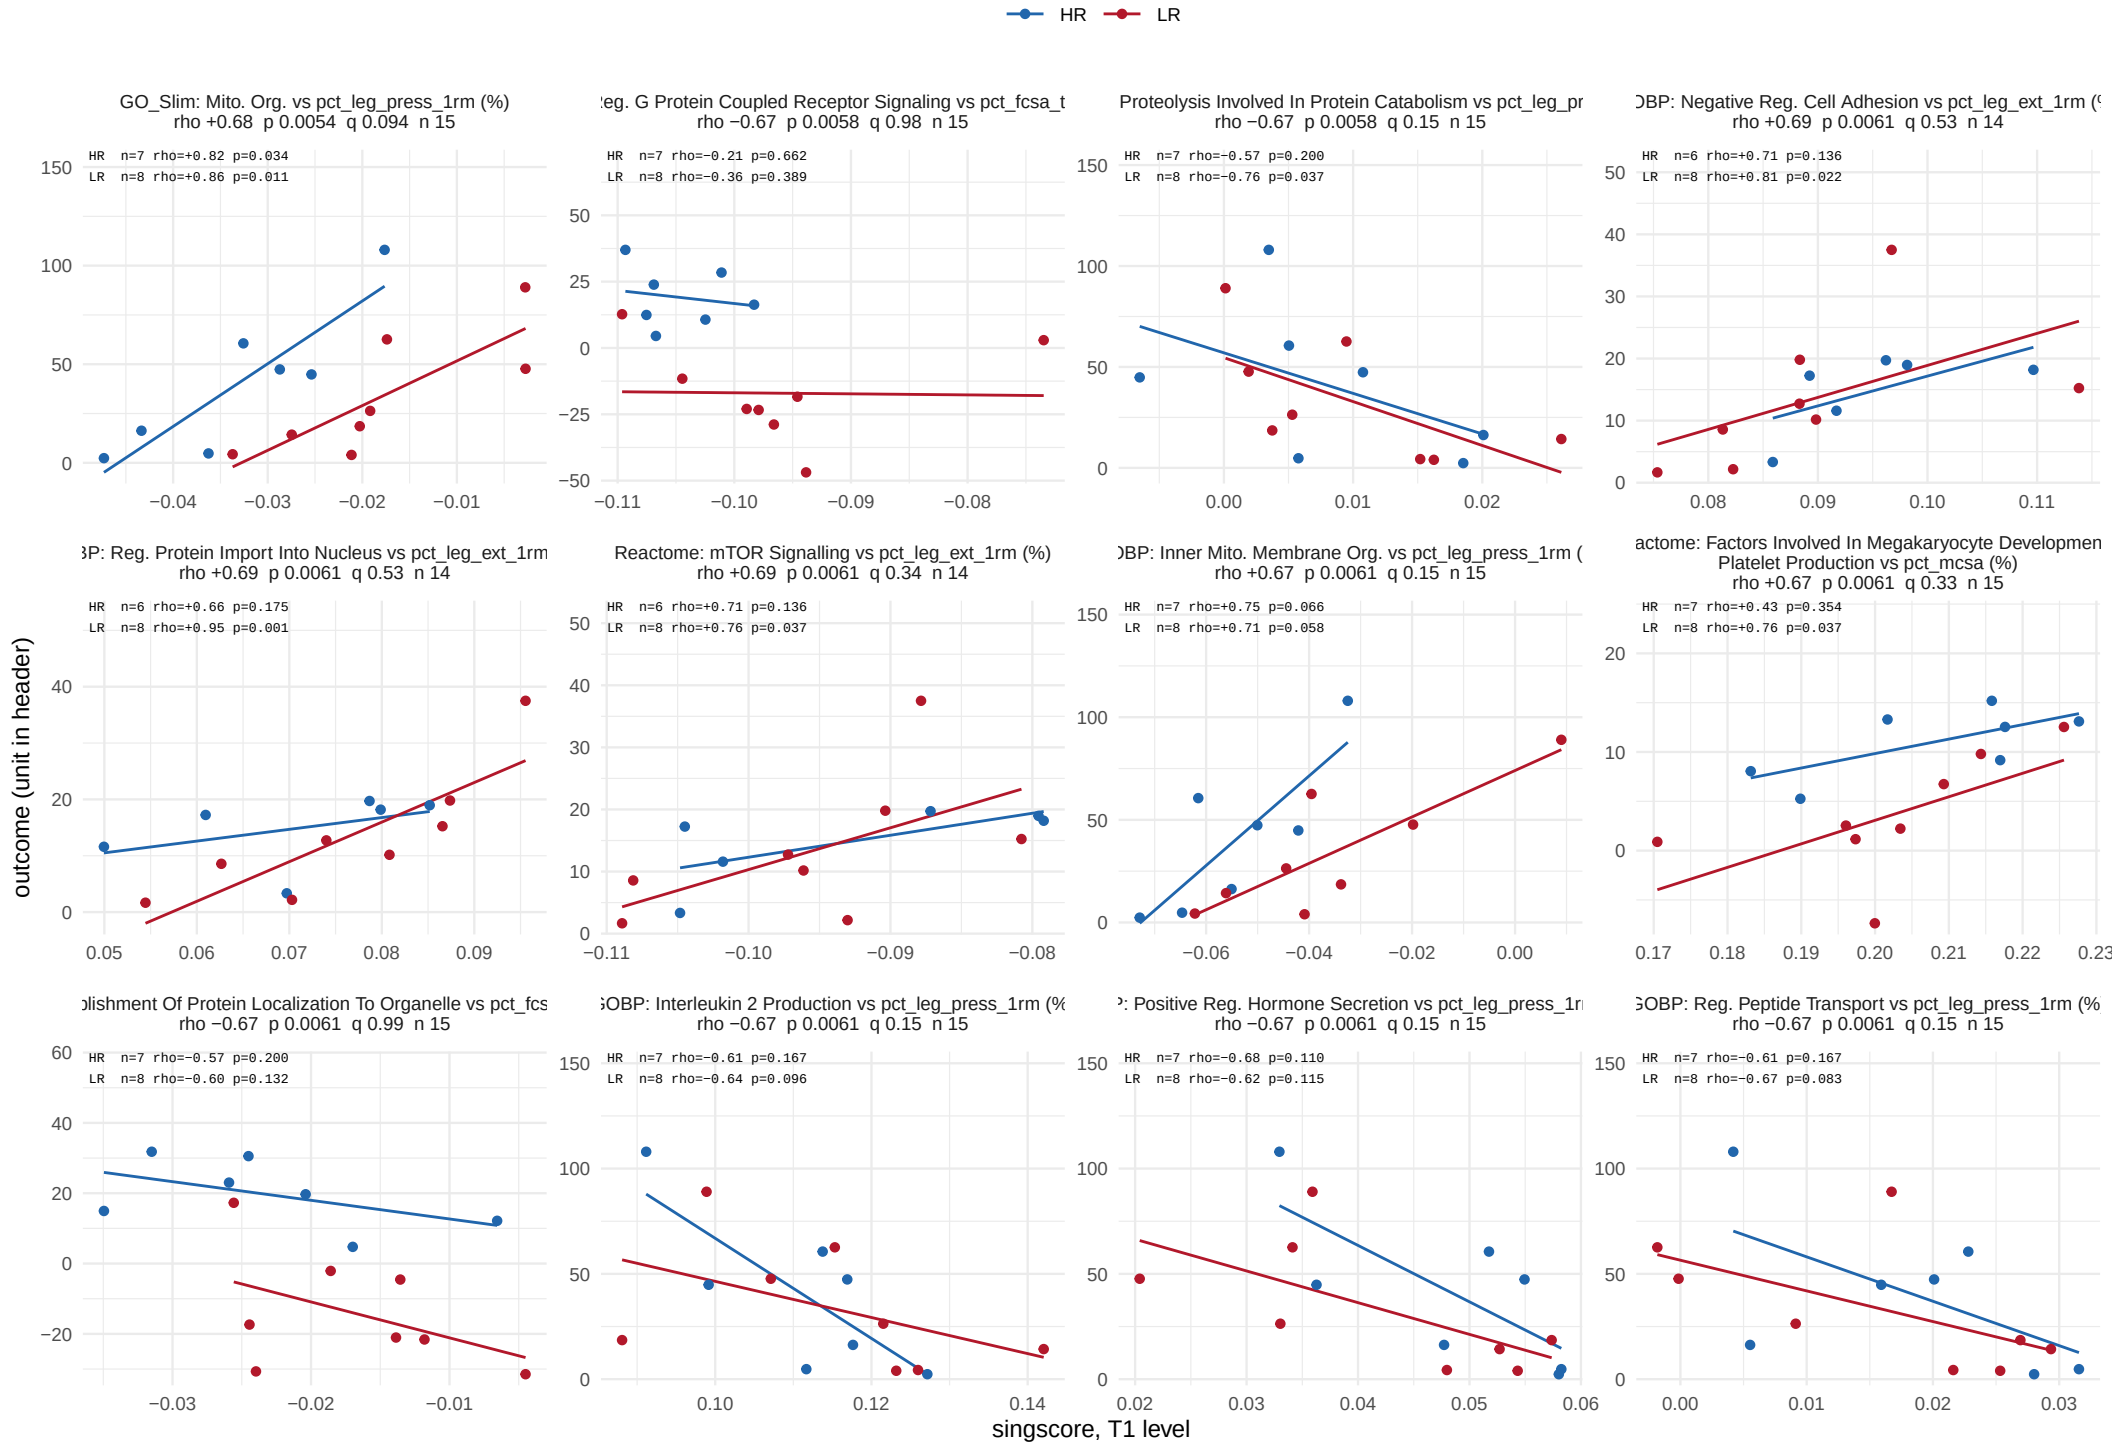


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, baseline window


626 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 8 of 53.

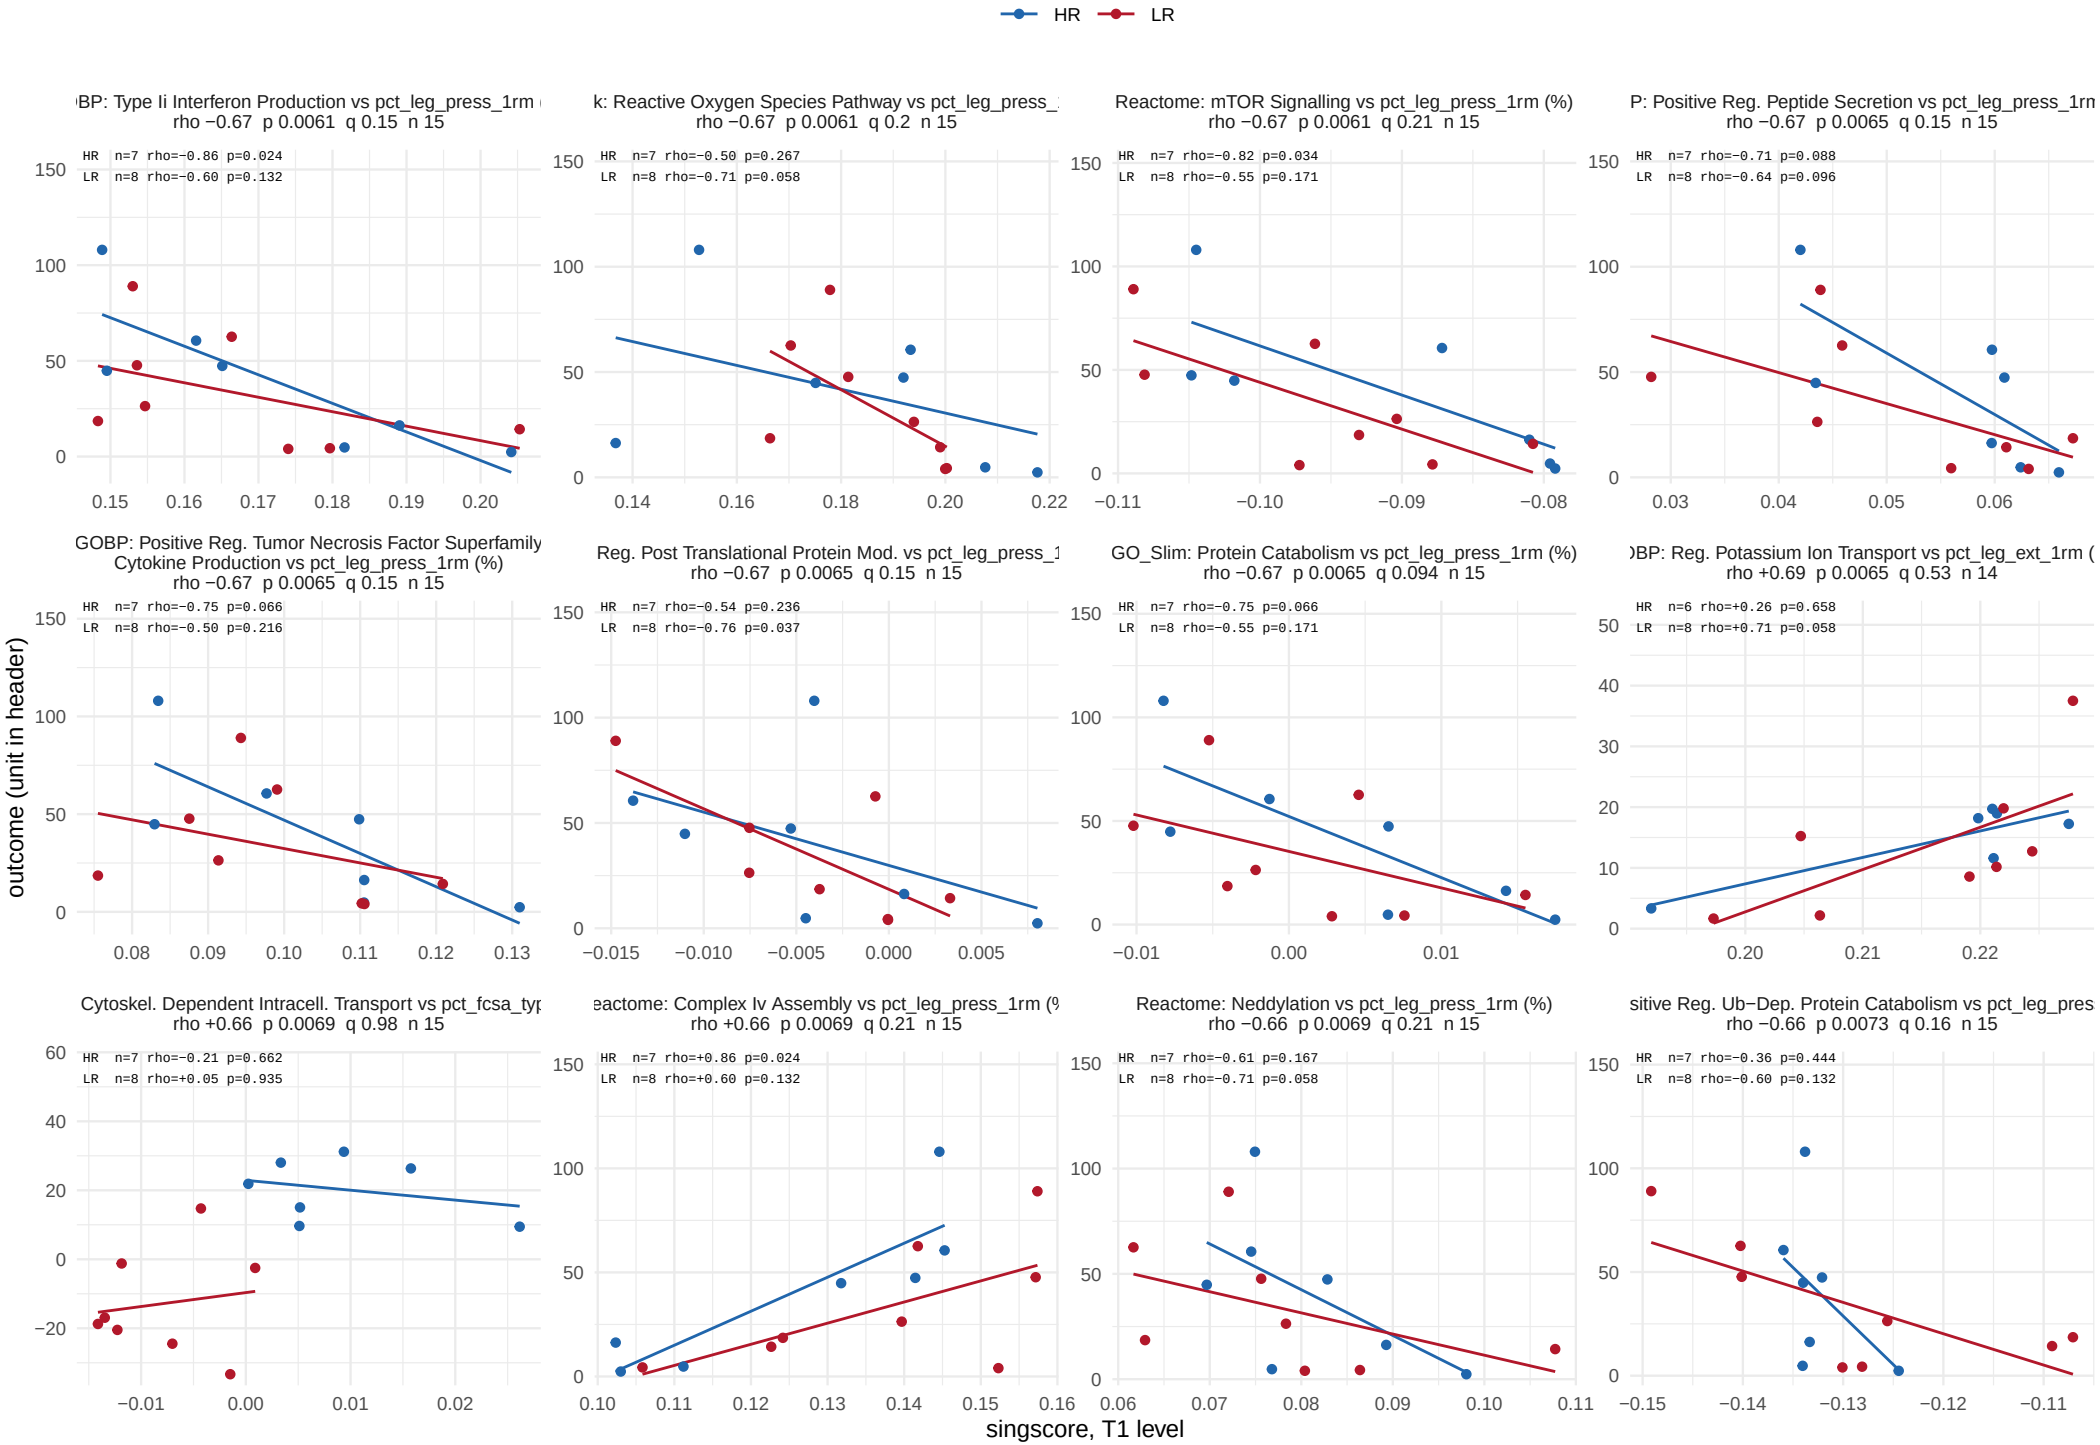


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, baseline window


626 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 9 of 53.

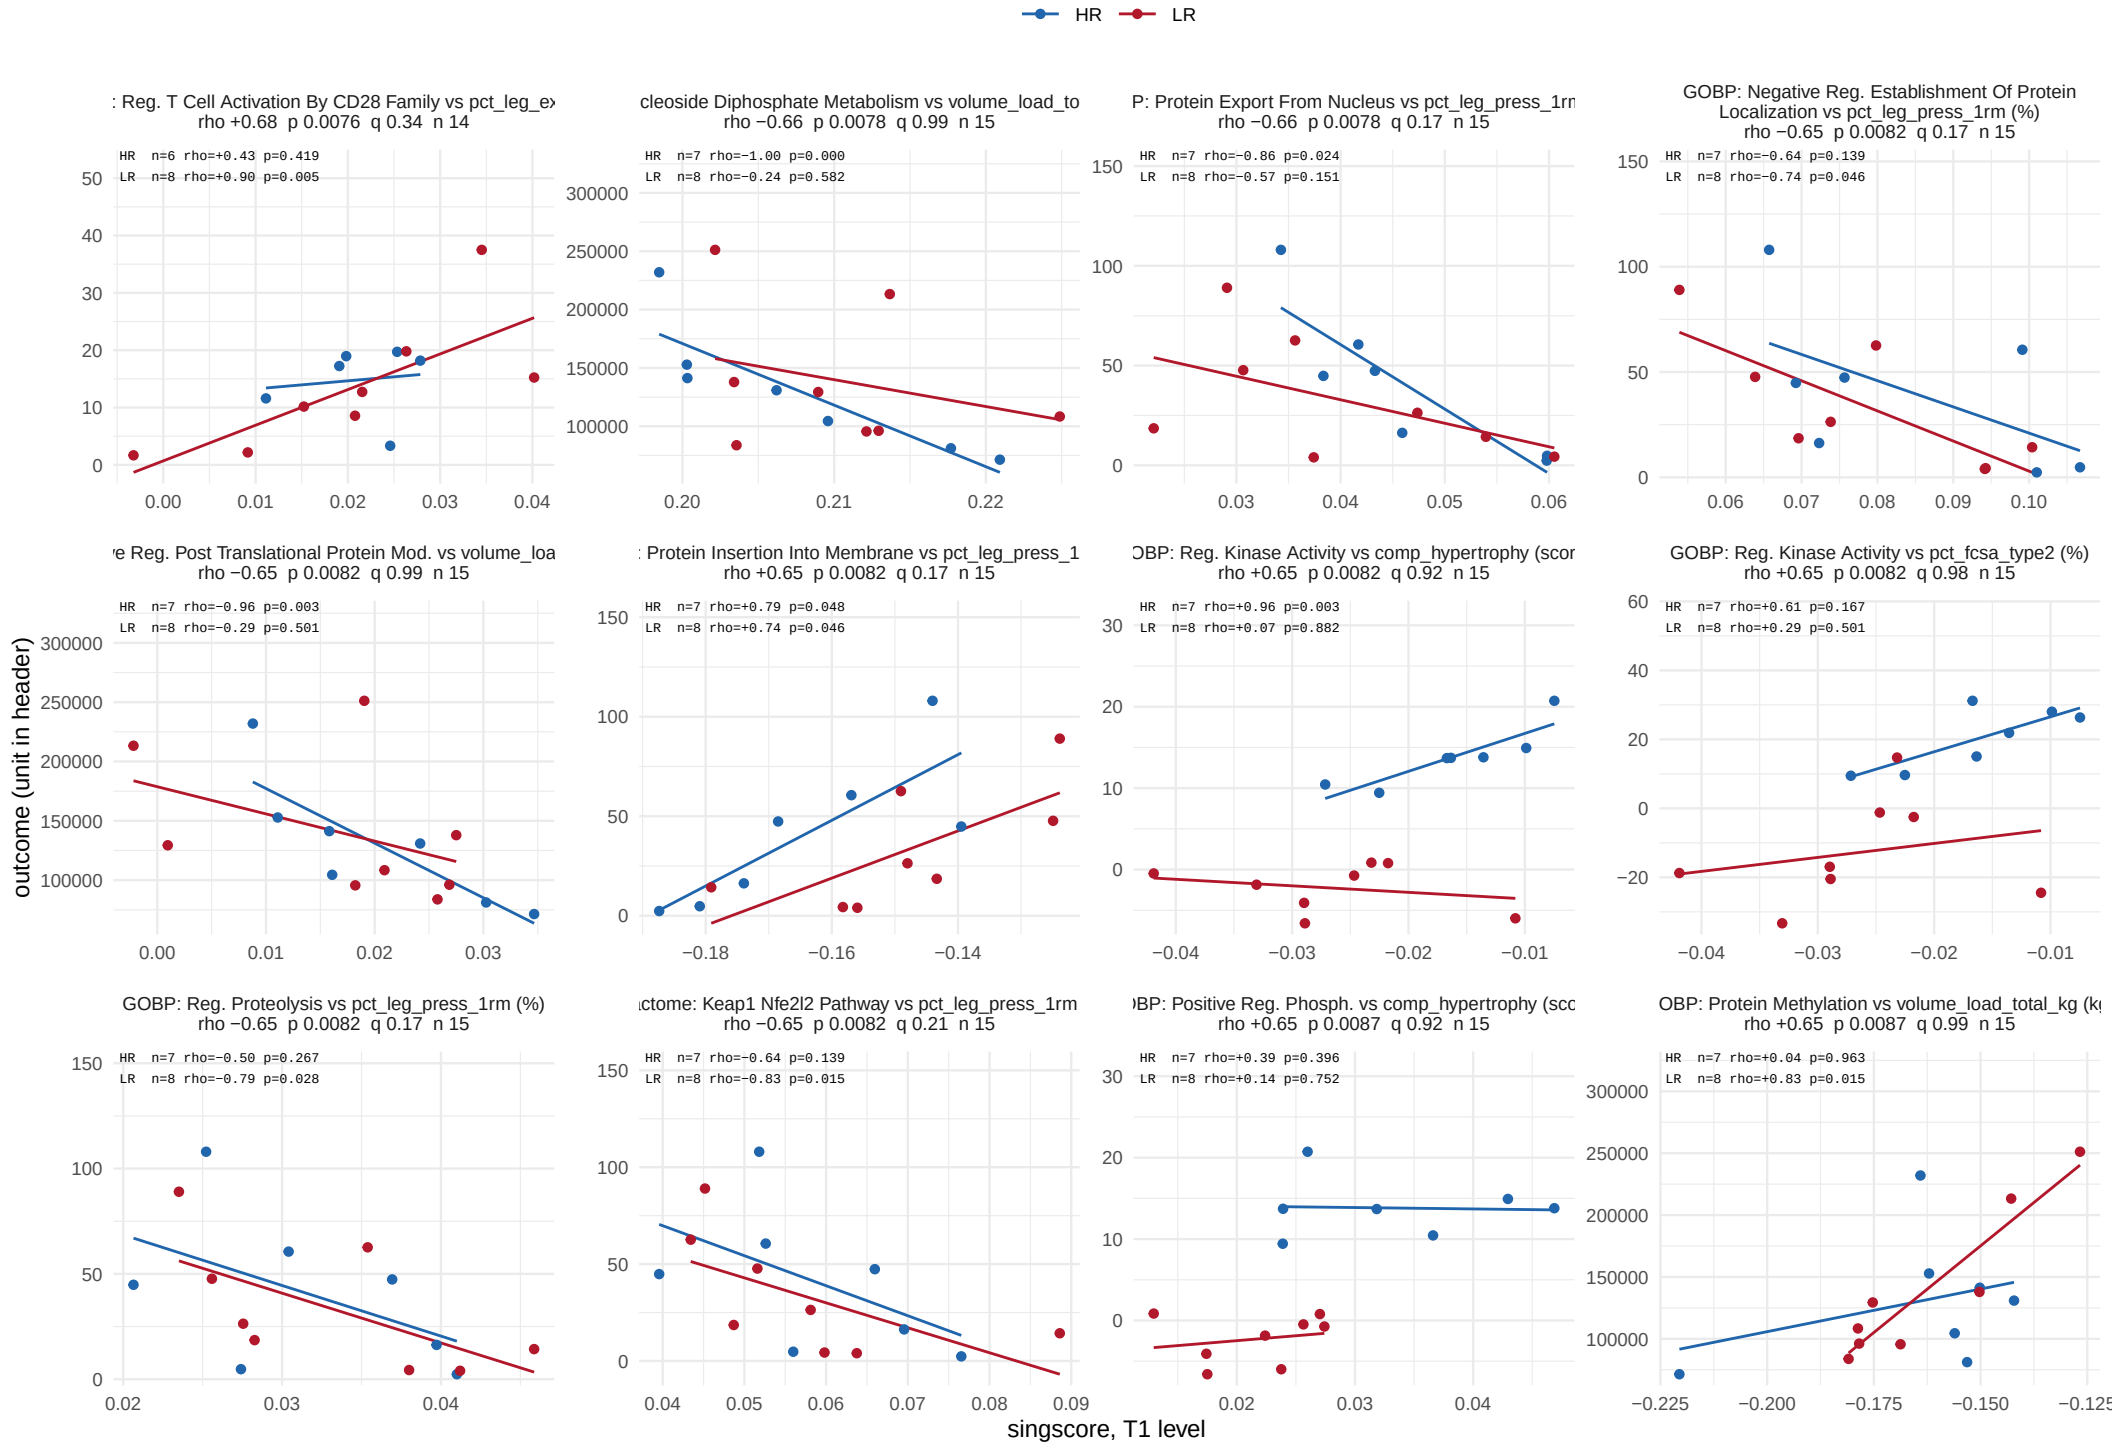


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, baseline window


626 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 10 of 53.

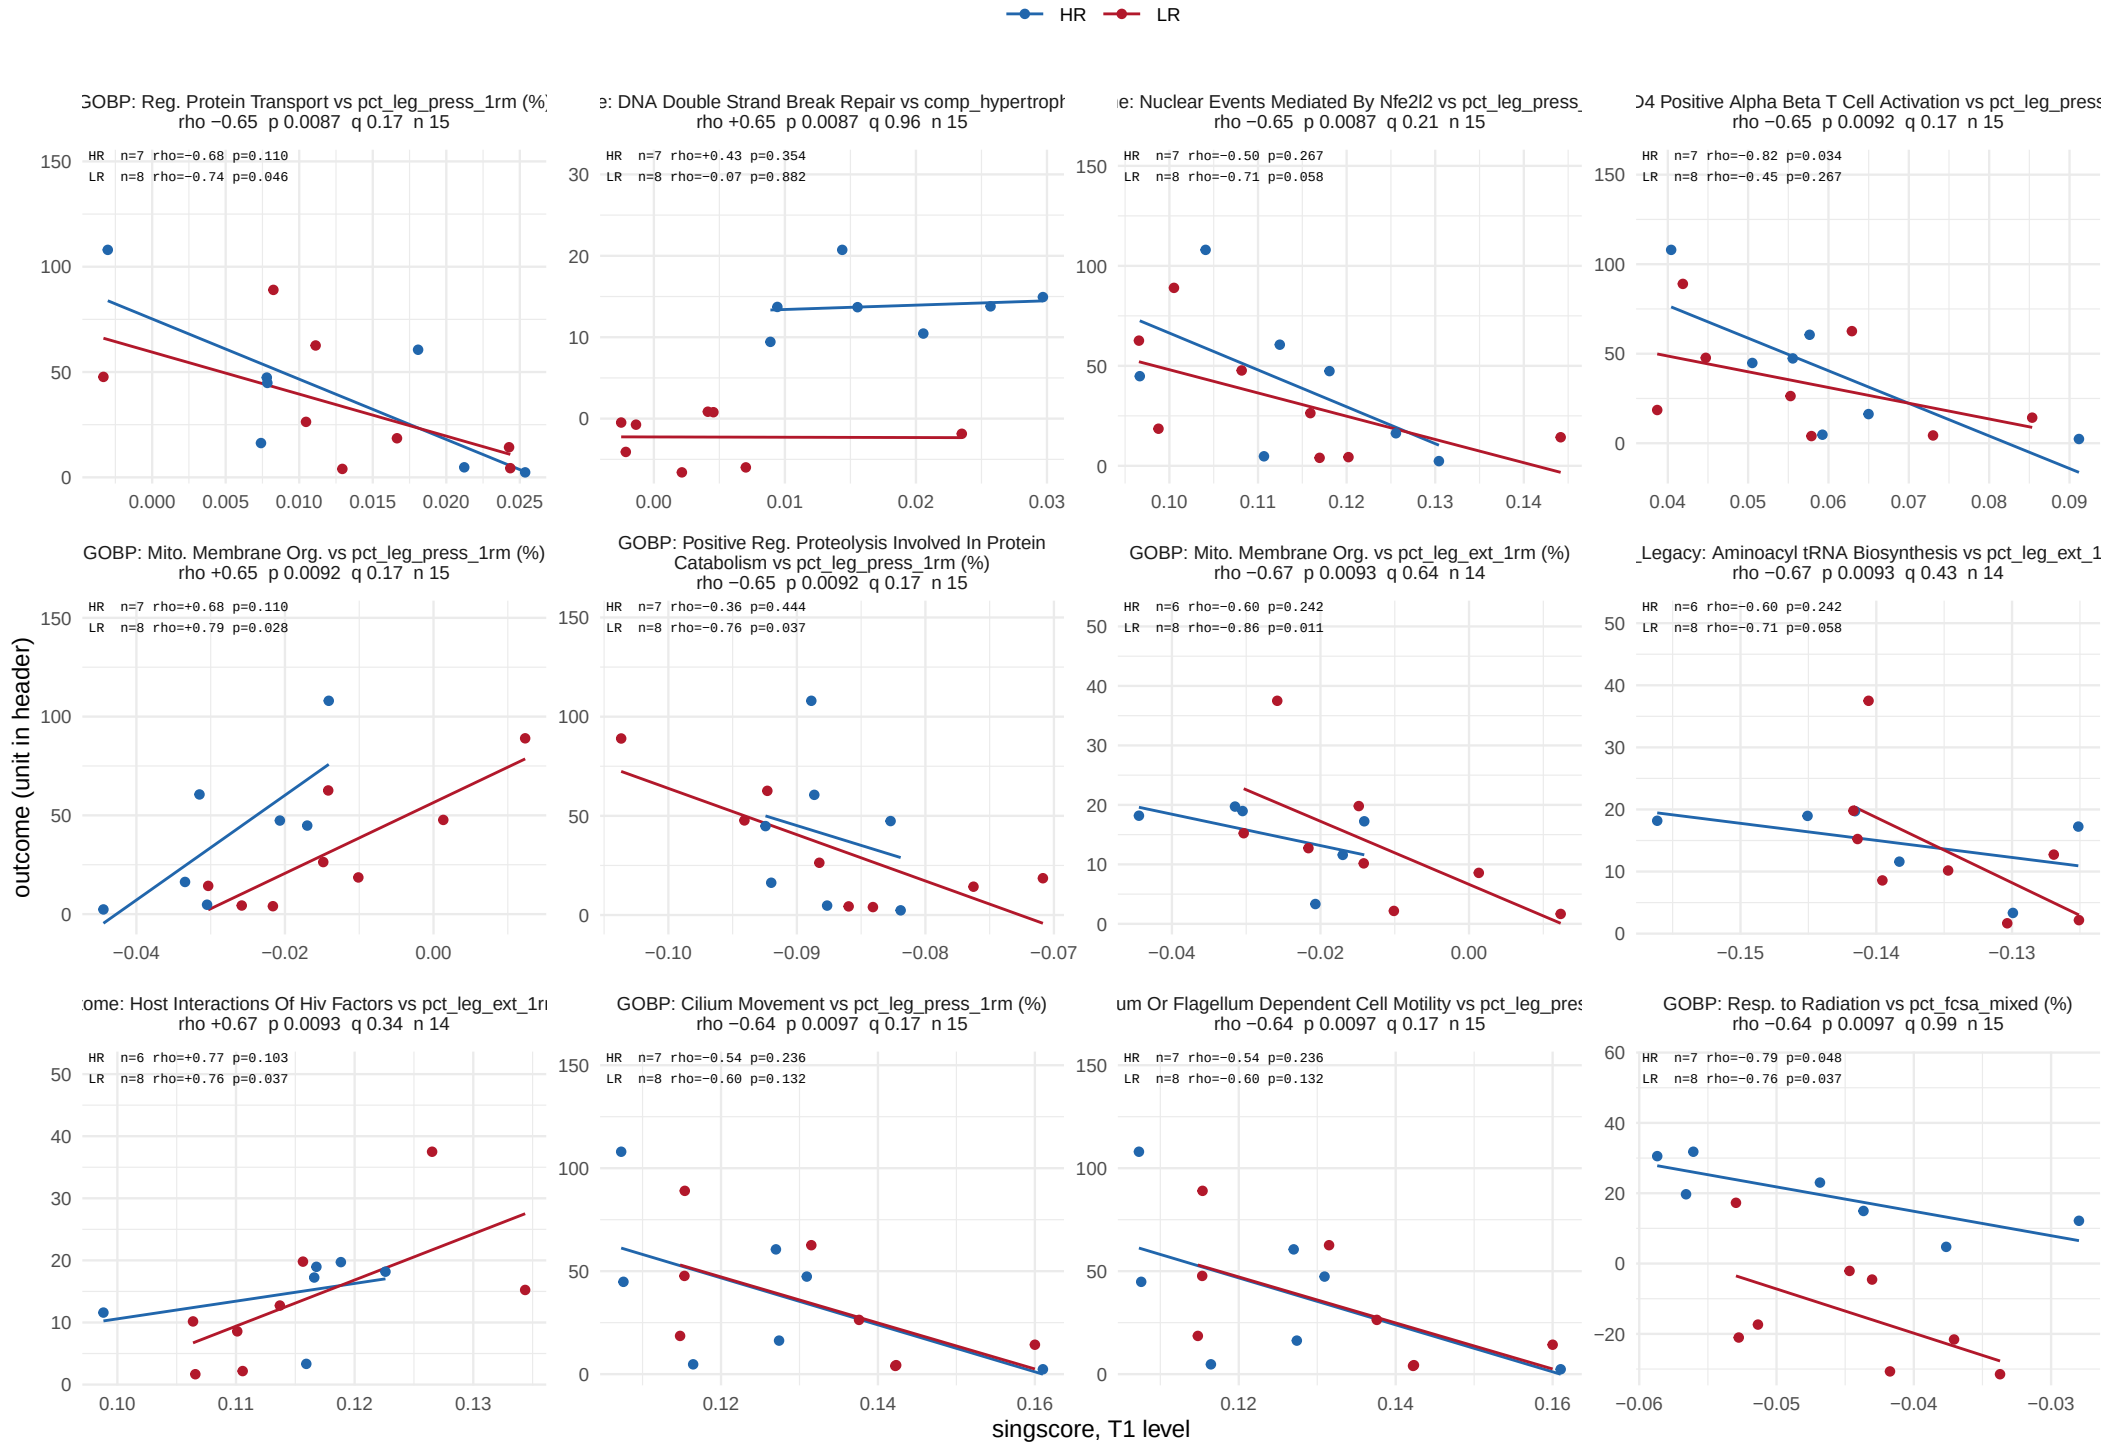


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, baseline window


626 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 11 of 53.

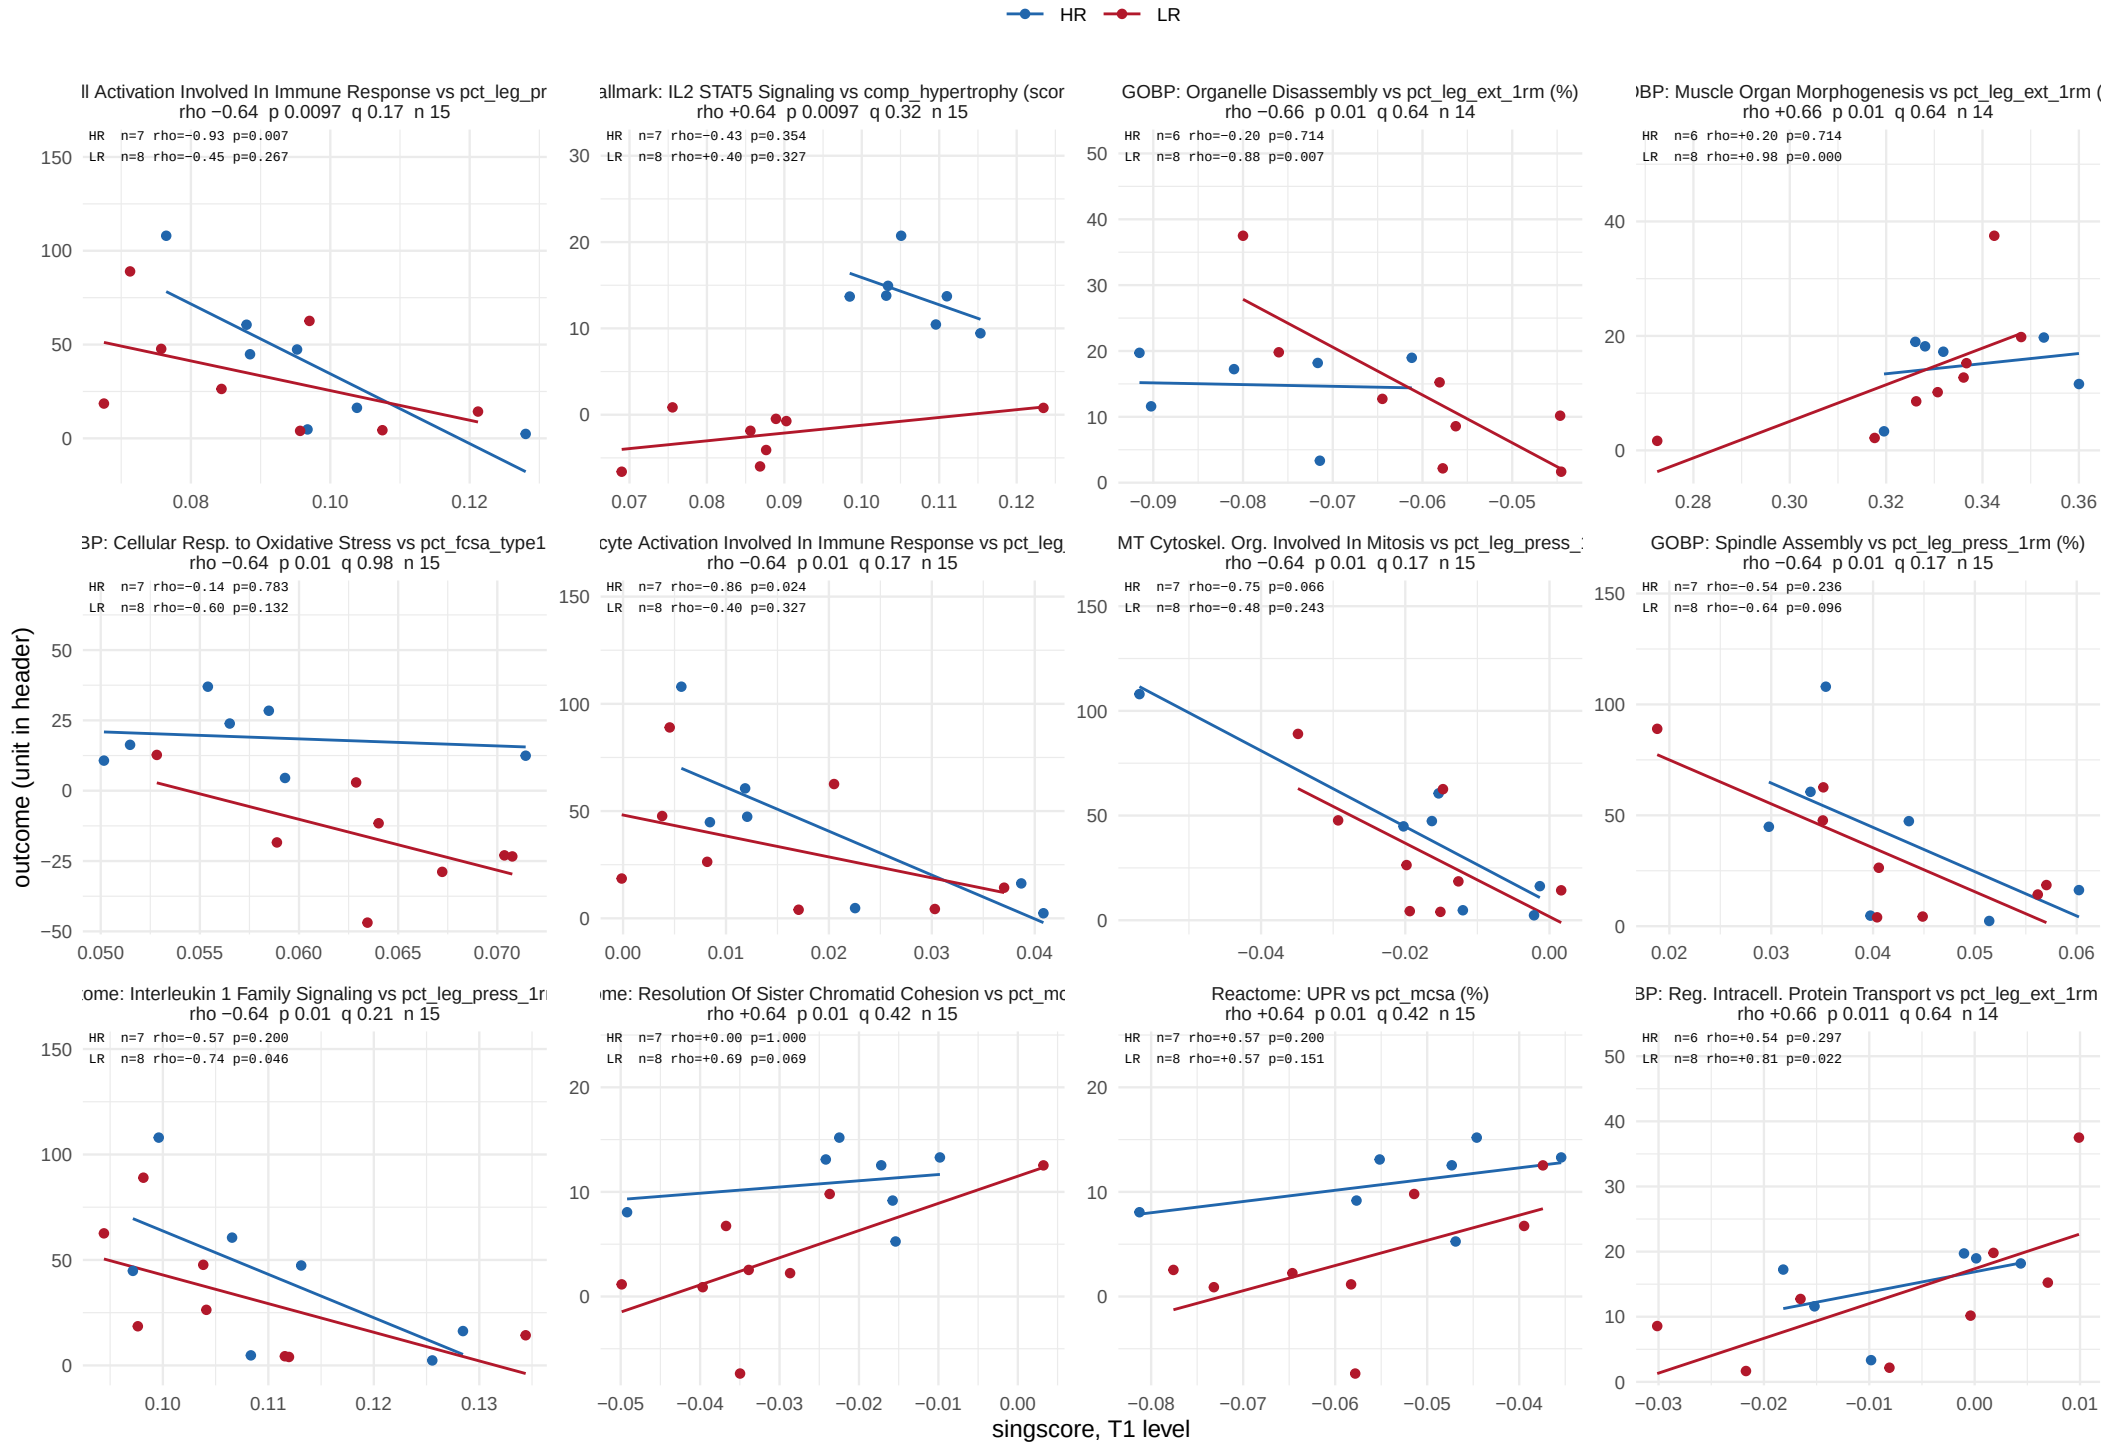


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, baseline window


626 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 12 of 53.

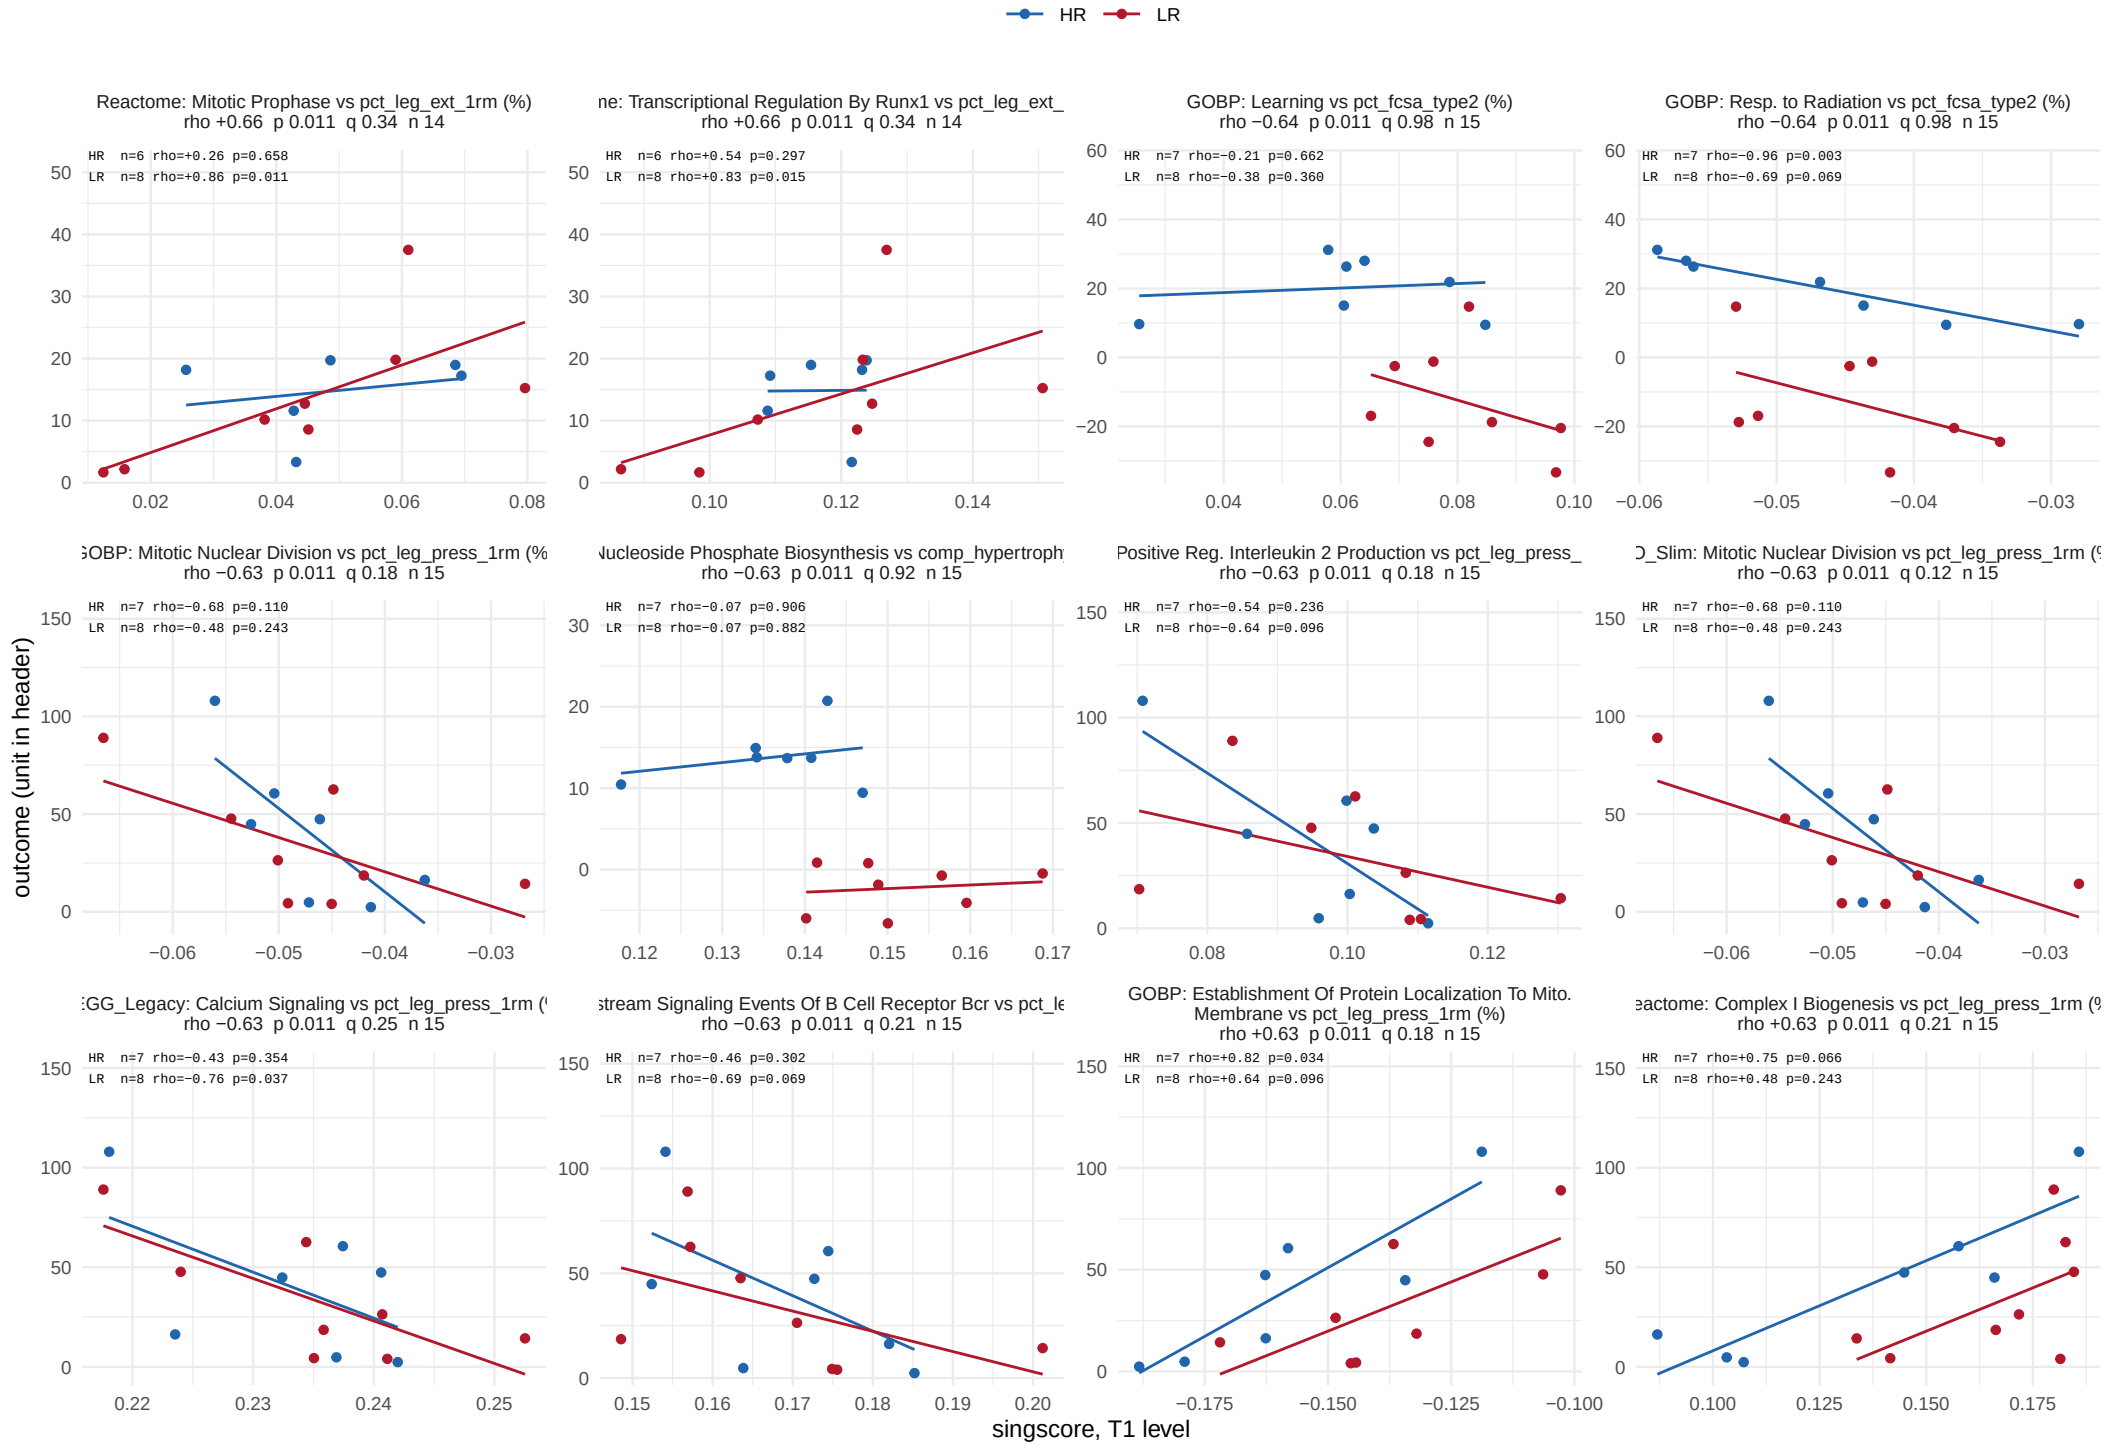


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, baseline window


626 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 13 of 53.

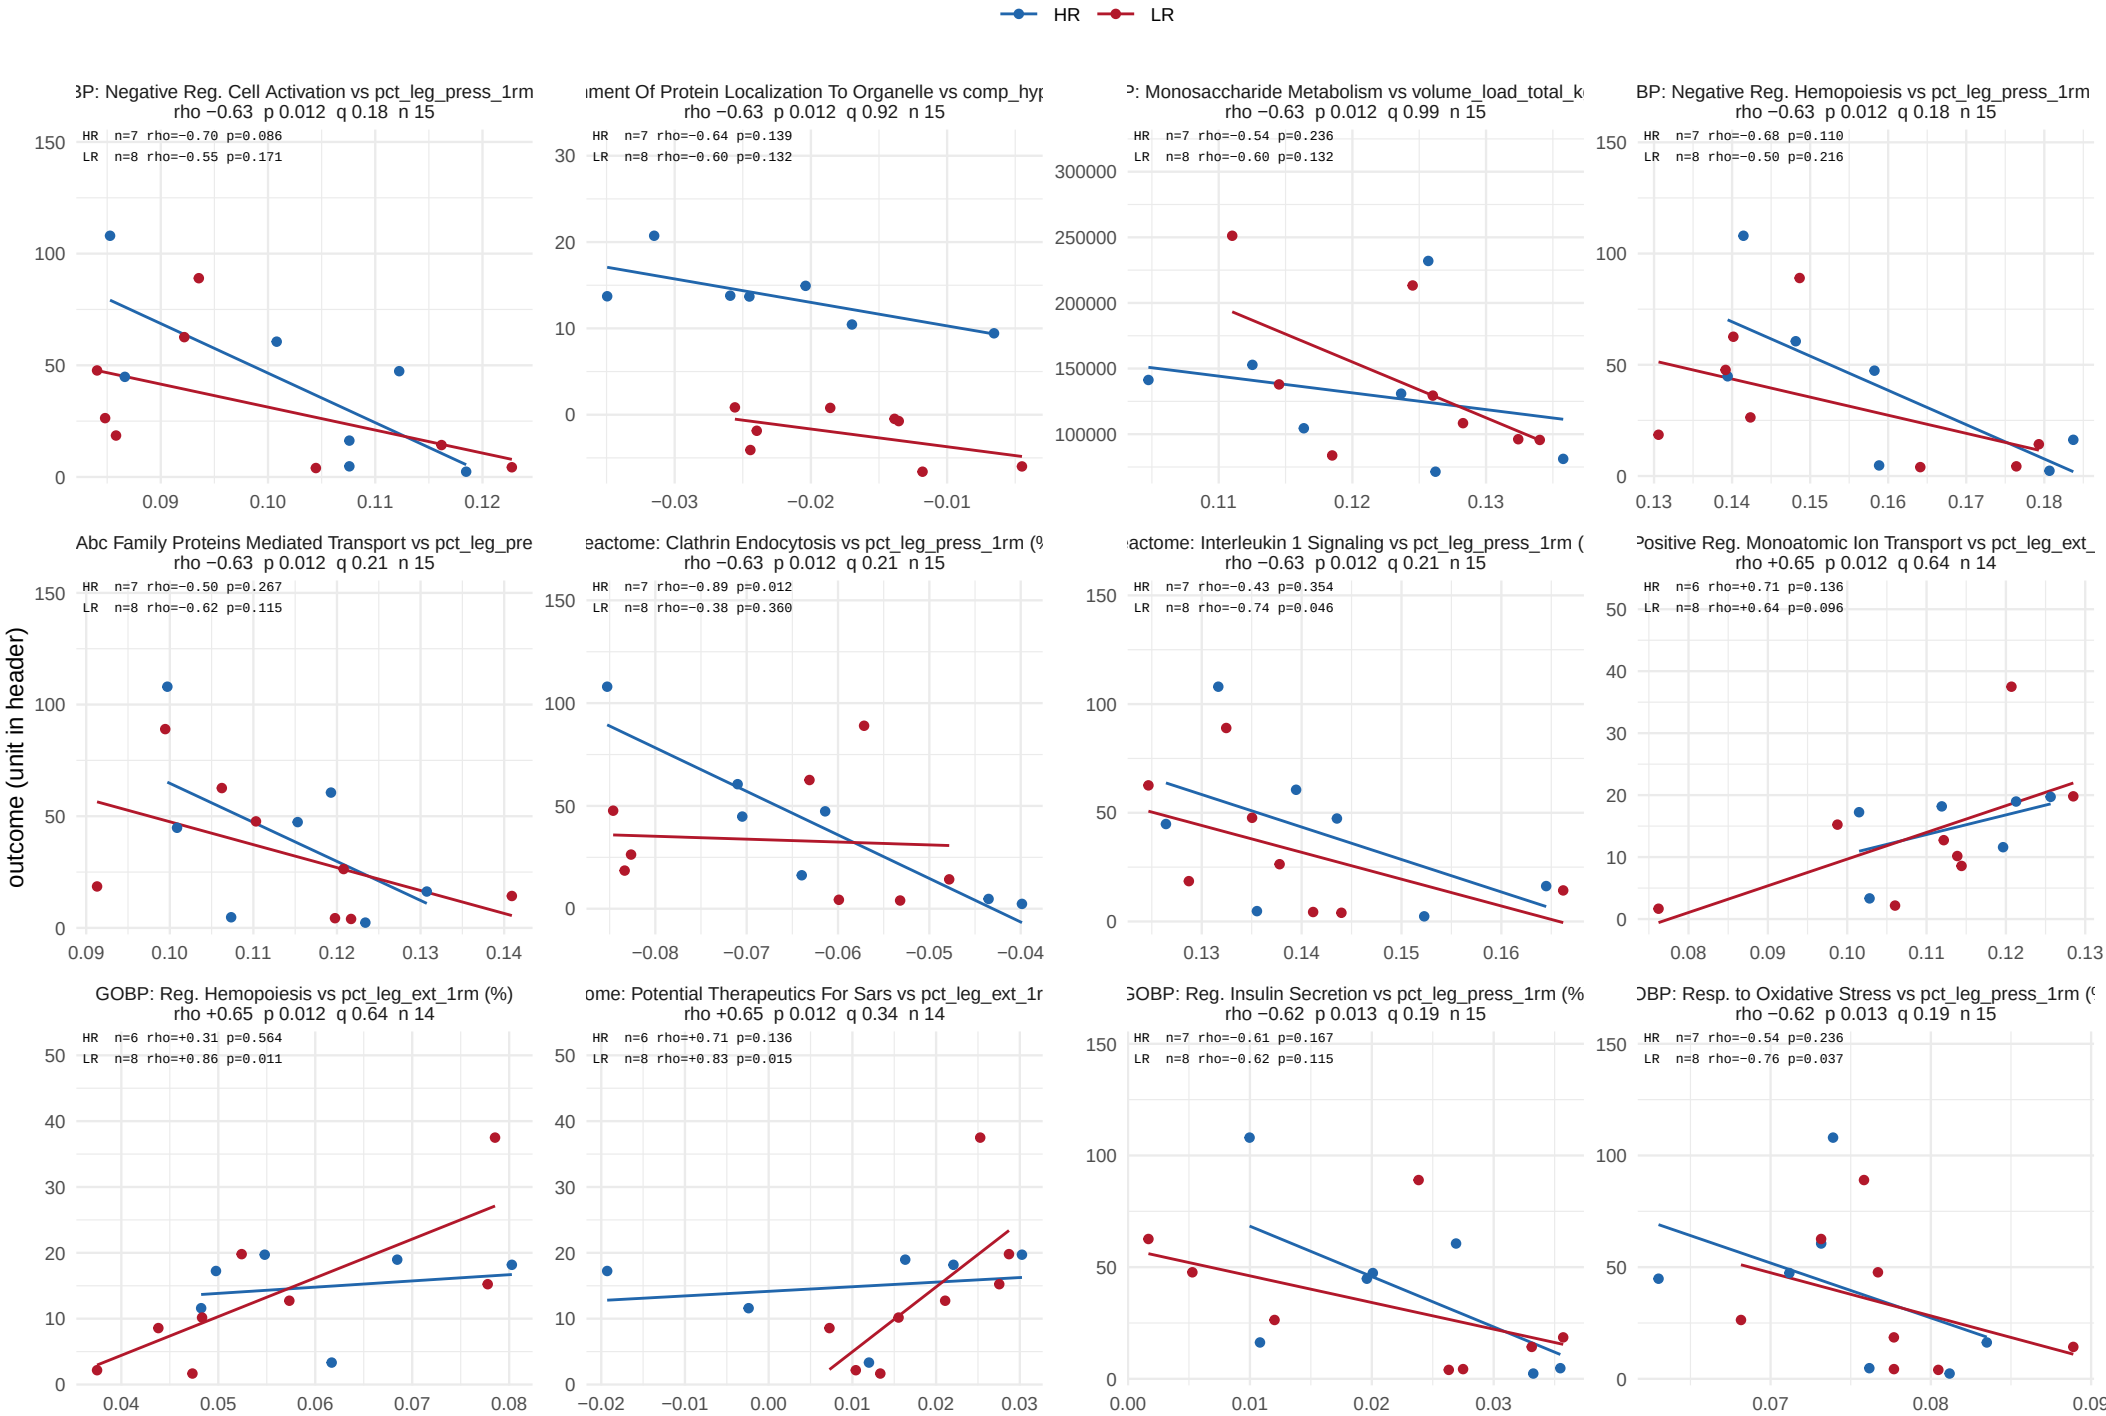


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, baseline window


626 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 14 of 53.

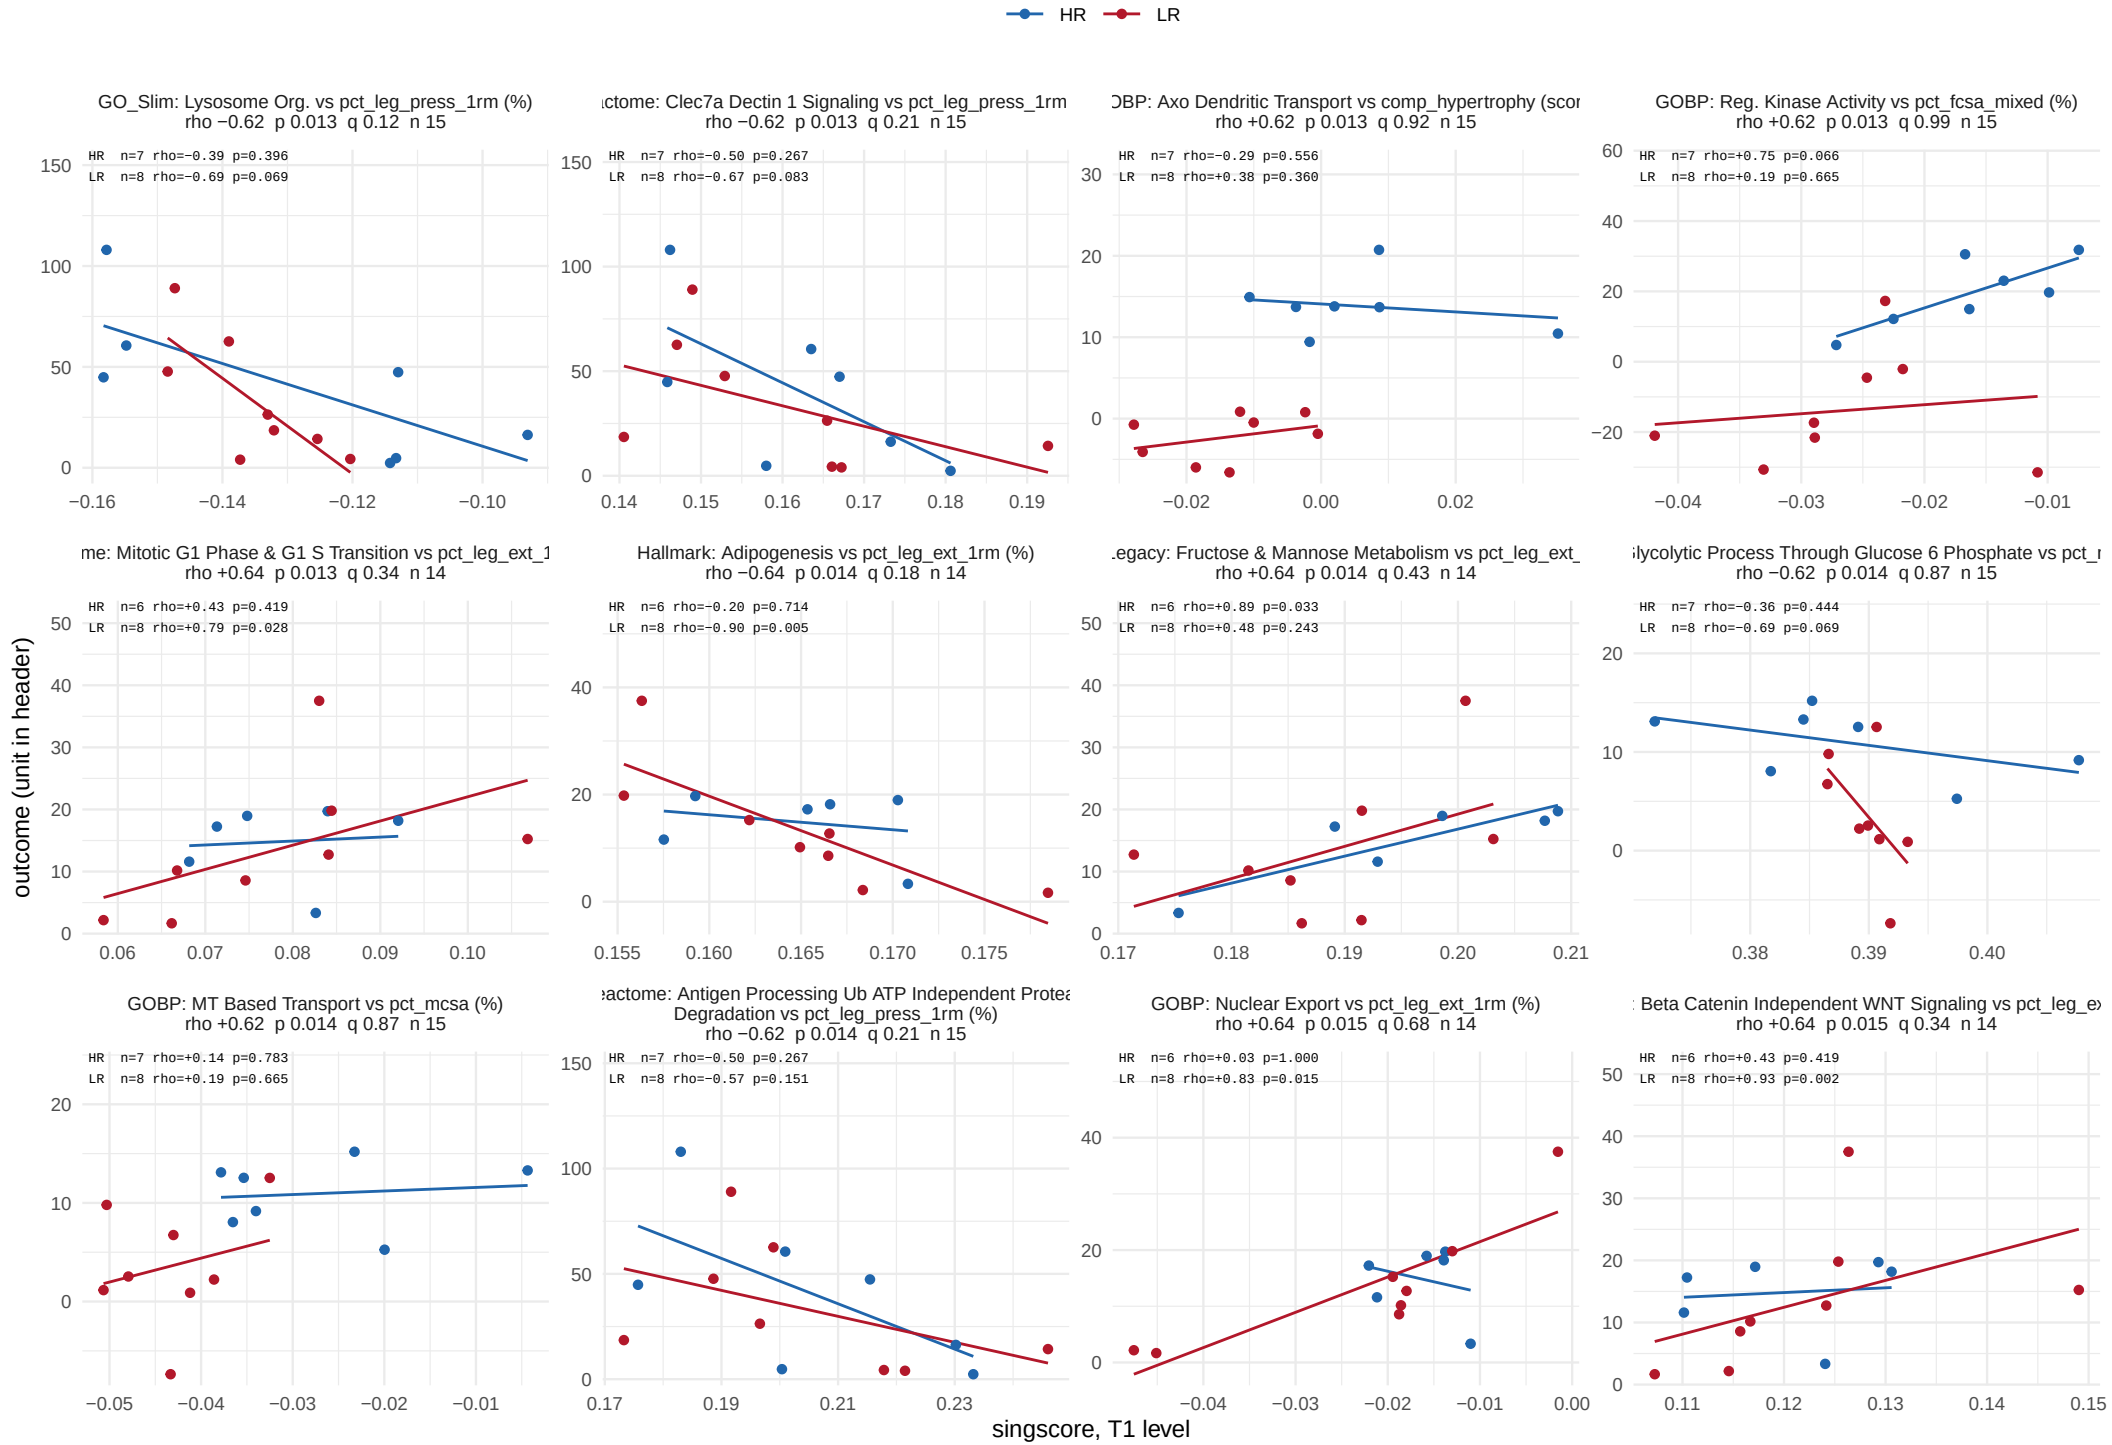


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, baseline window


626 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 15 of 53.

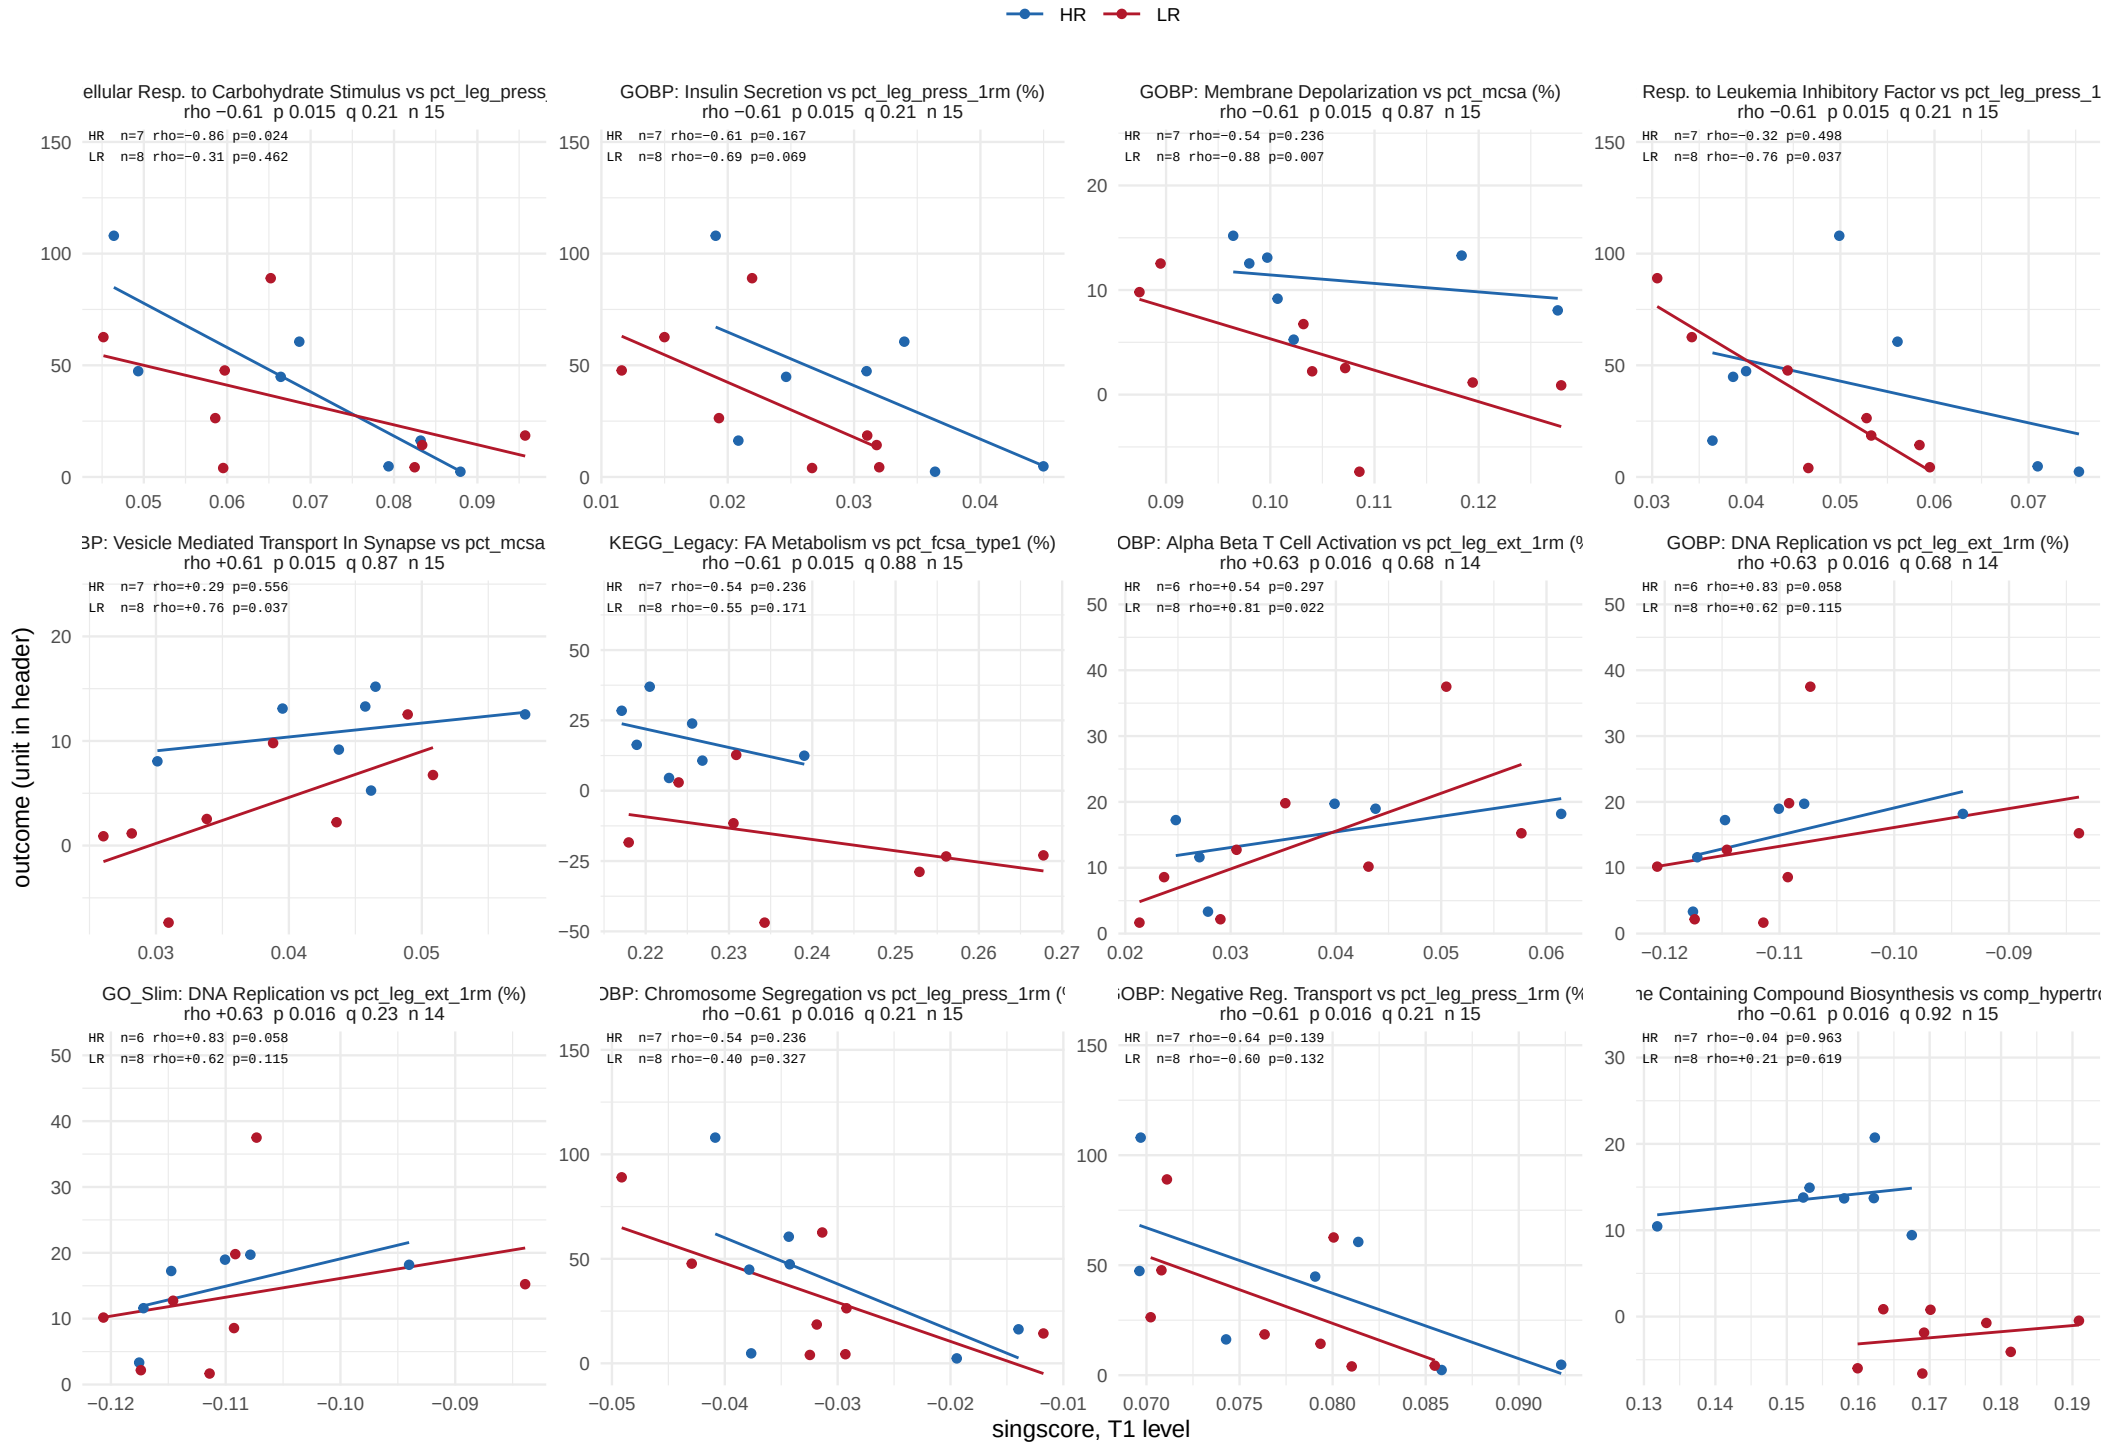


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, baseline window


626 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 16 of 53.

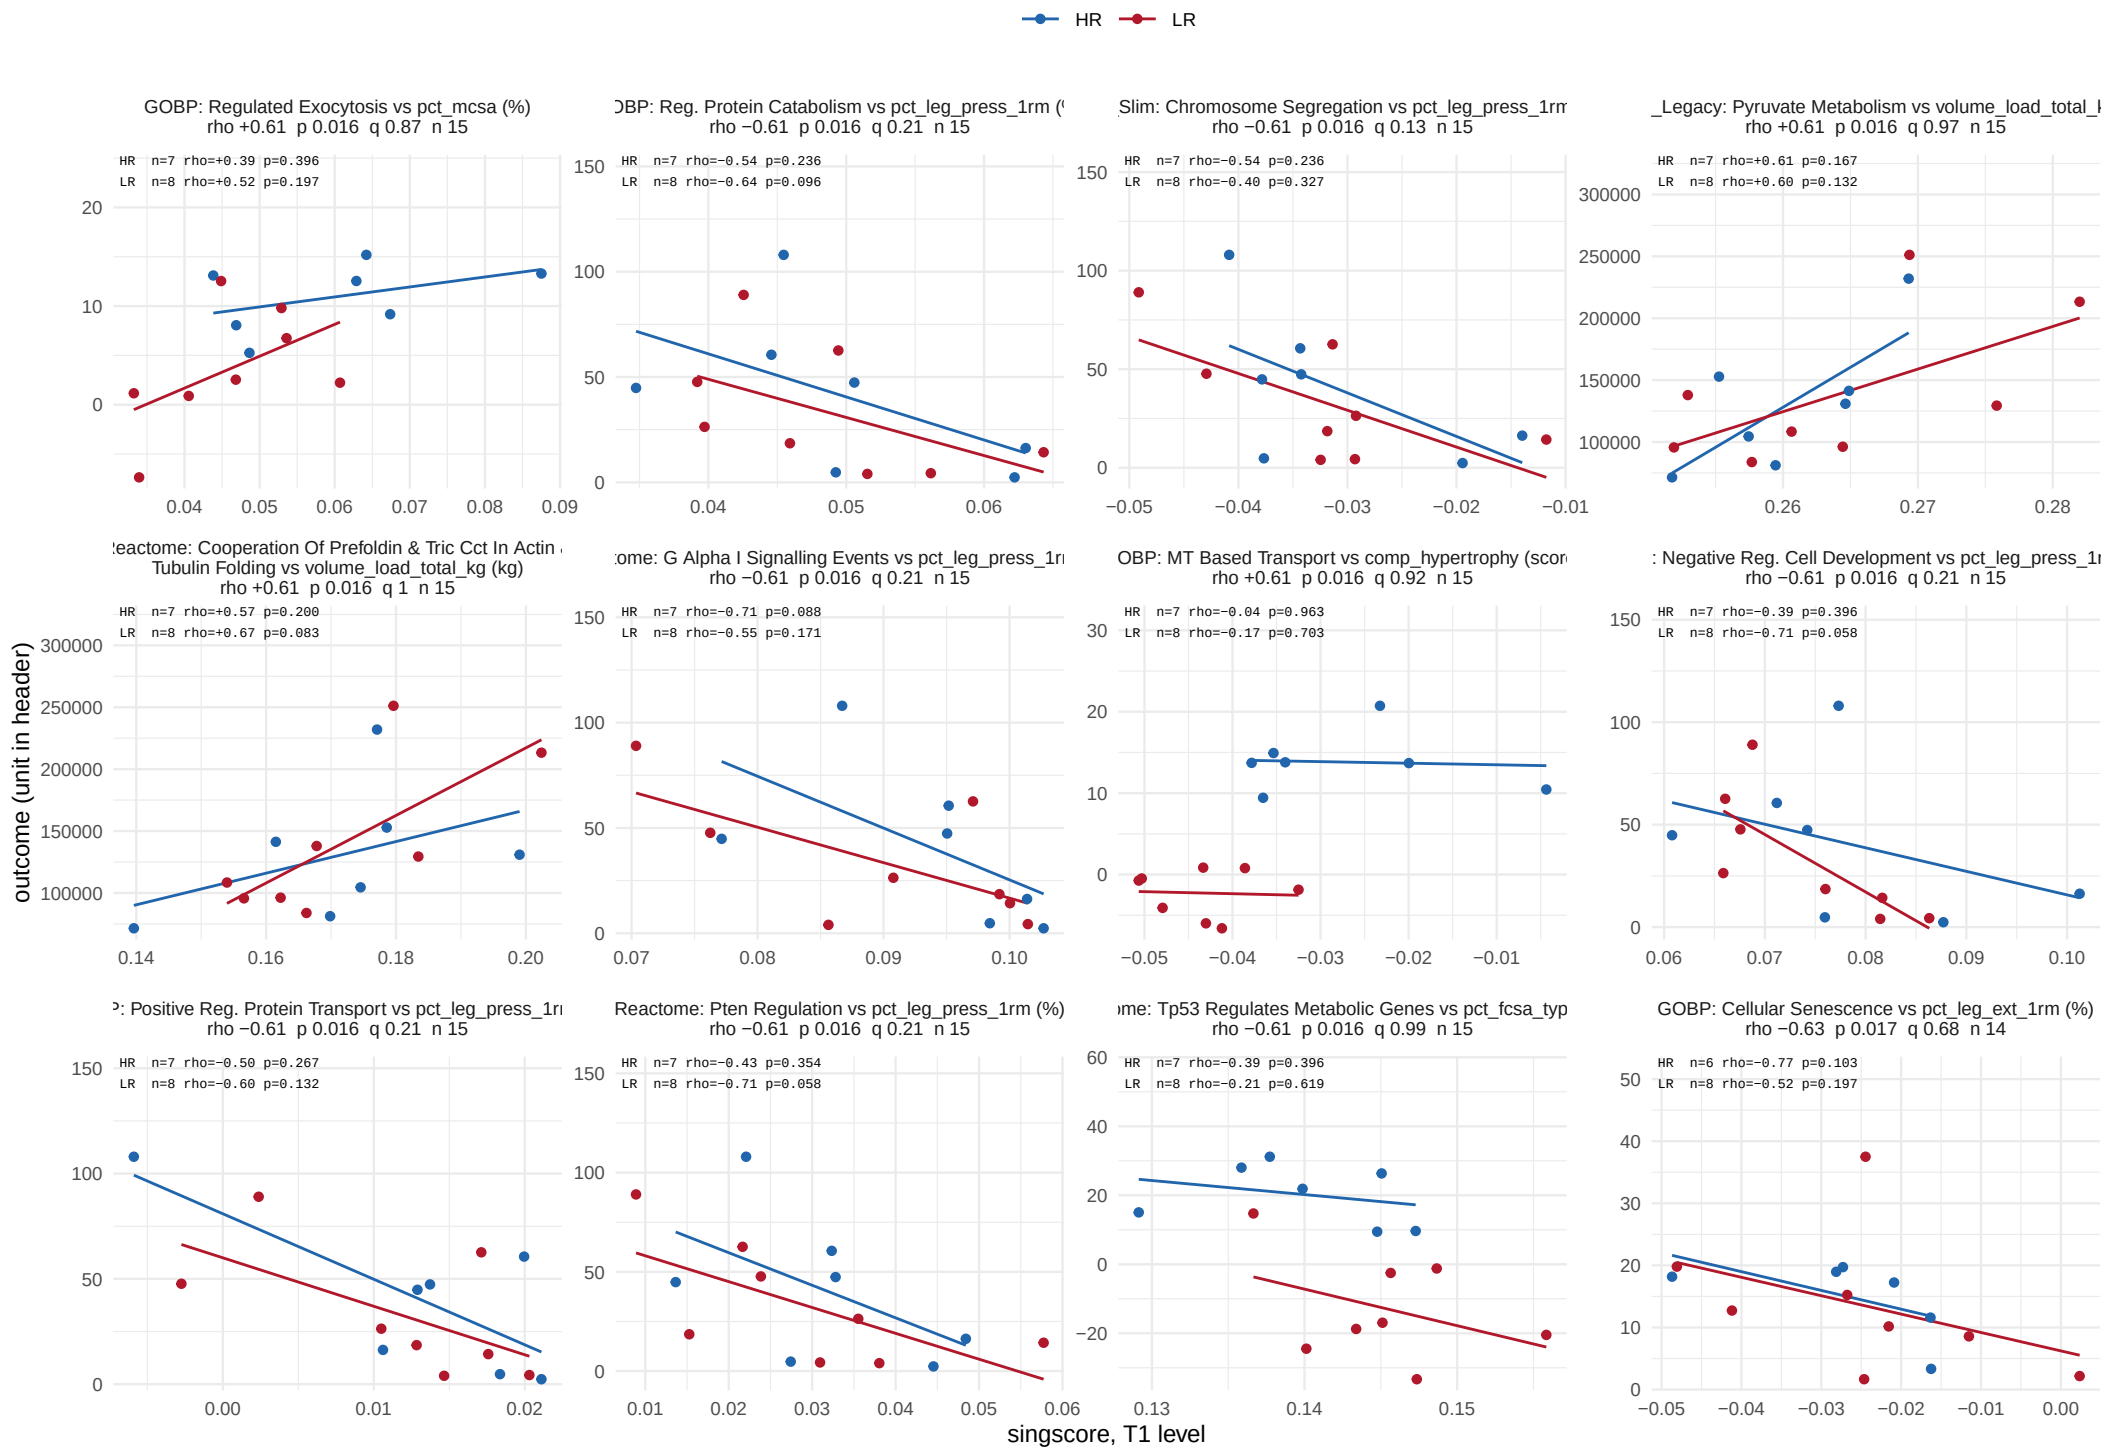


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, baseline window


626 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 17 of 53.

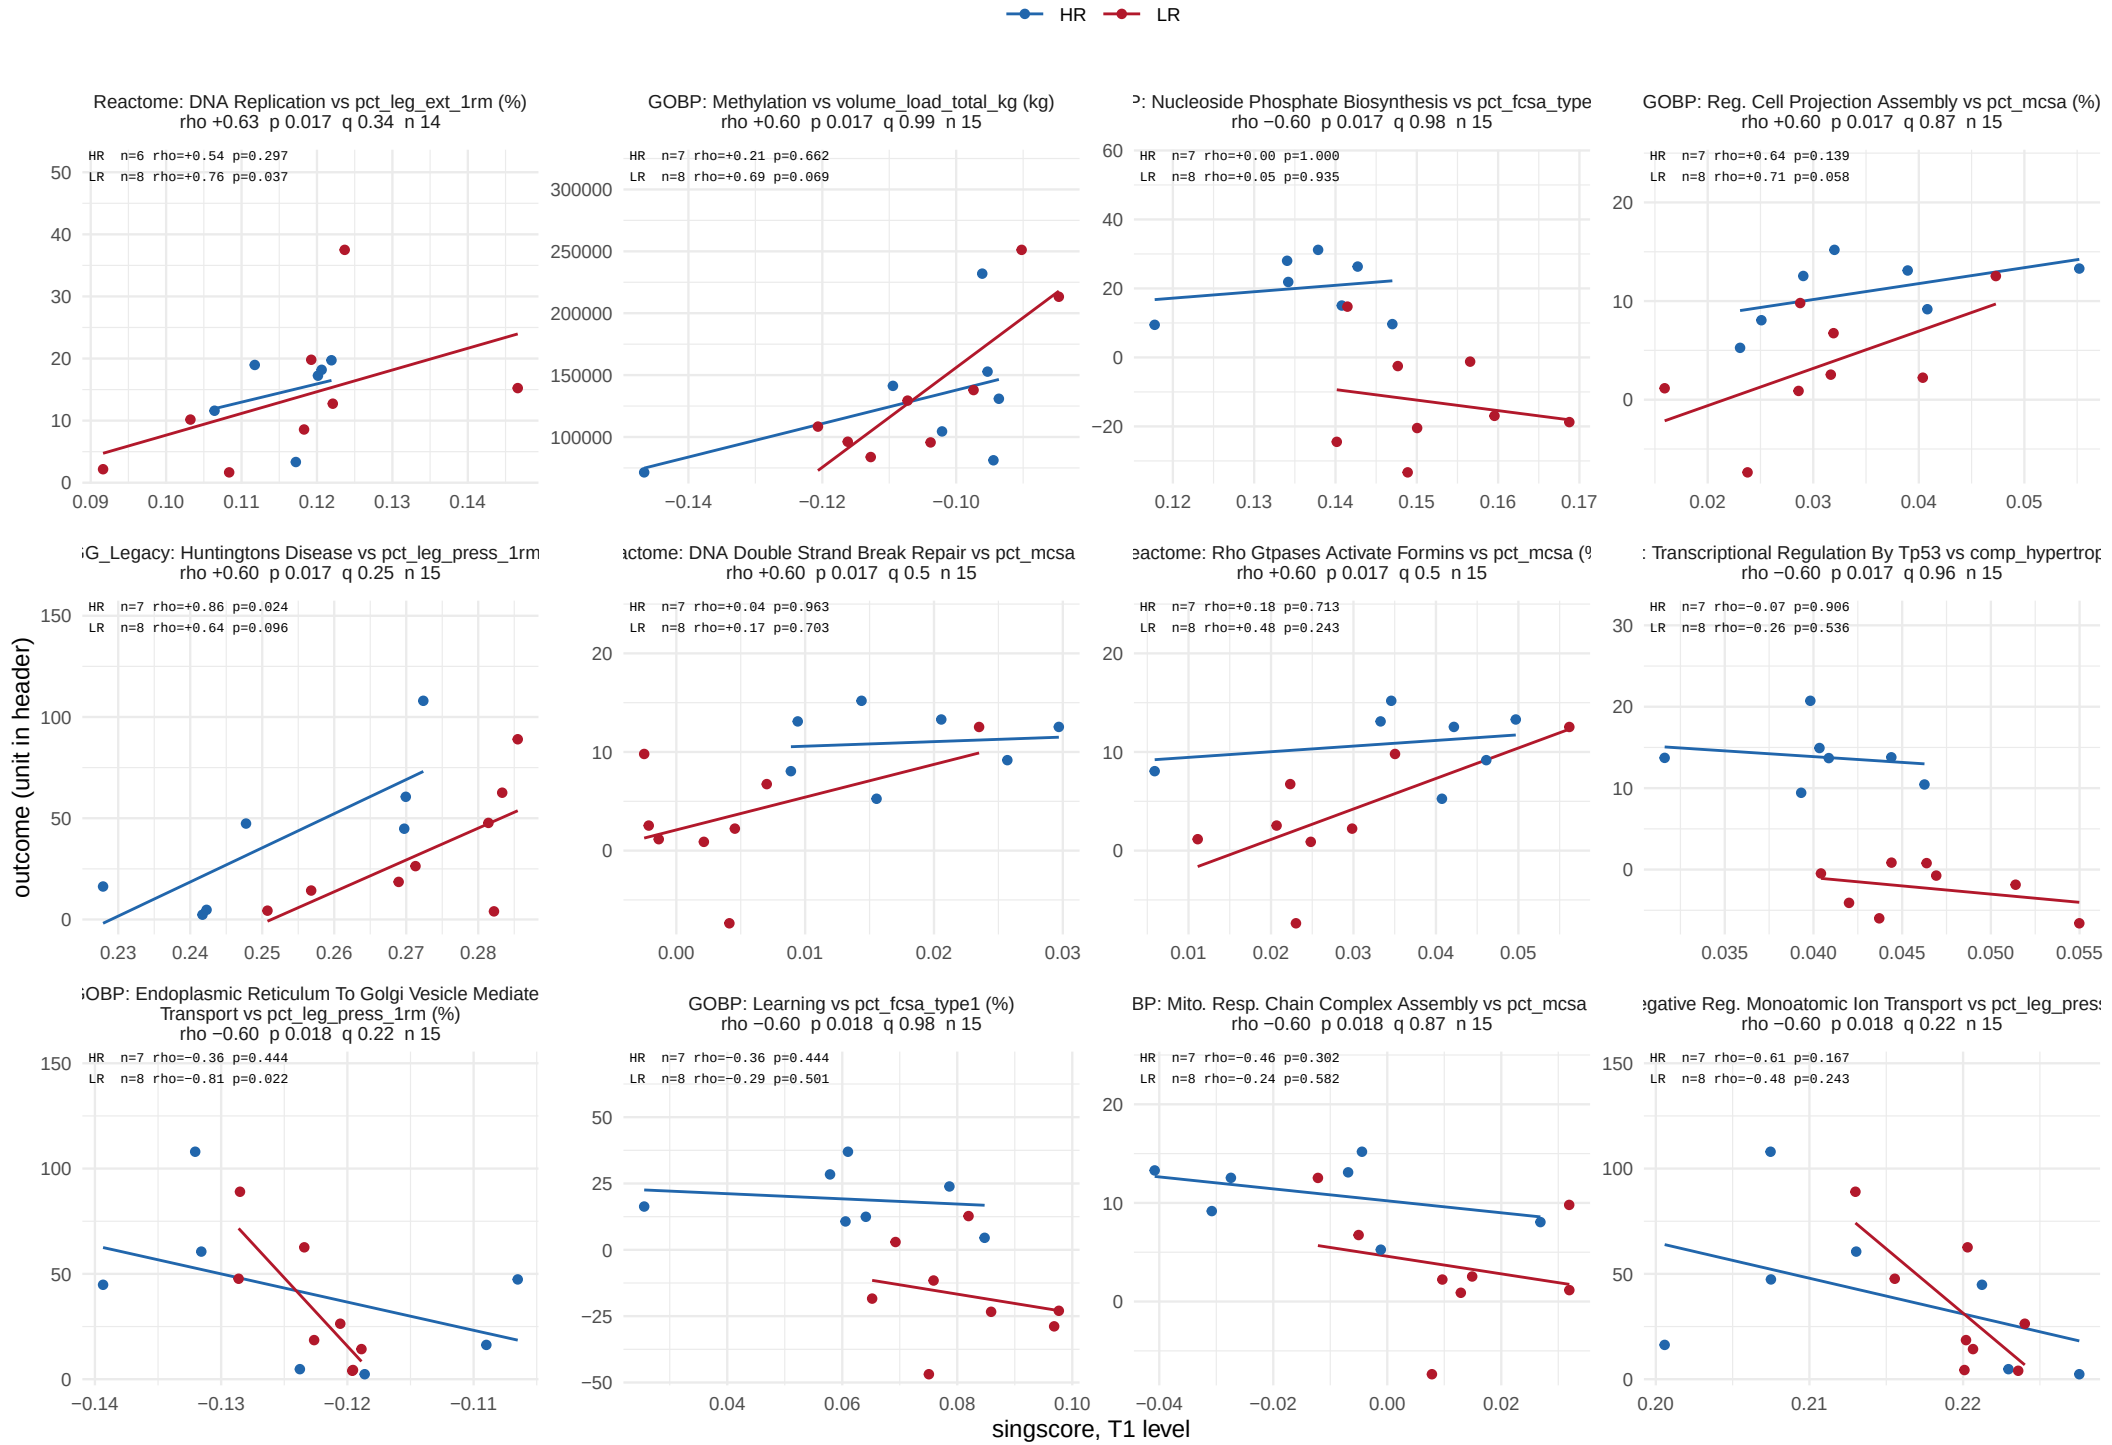


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, baseline window


626 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 18 of 53.

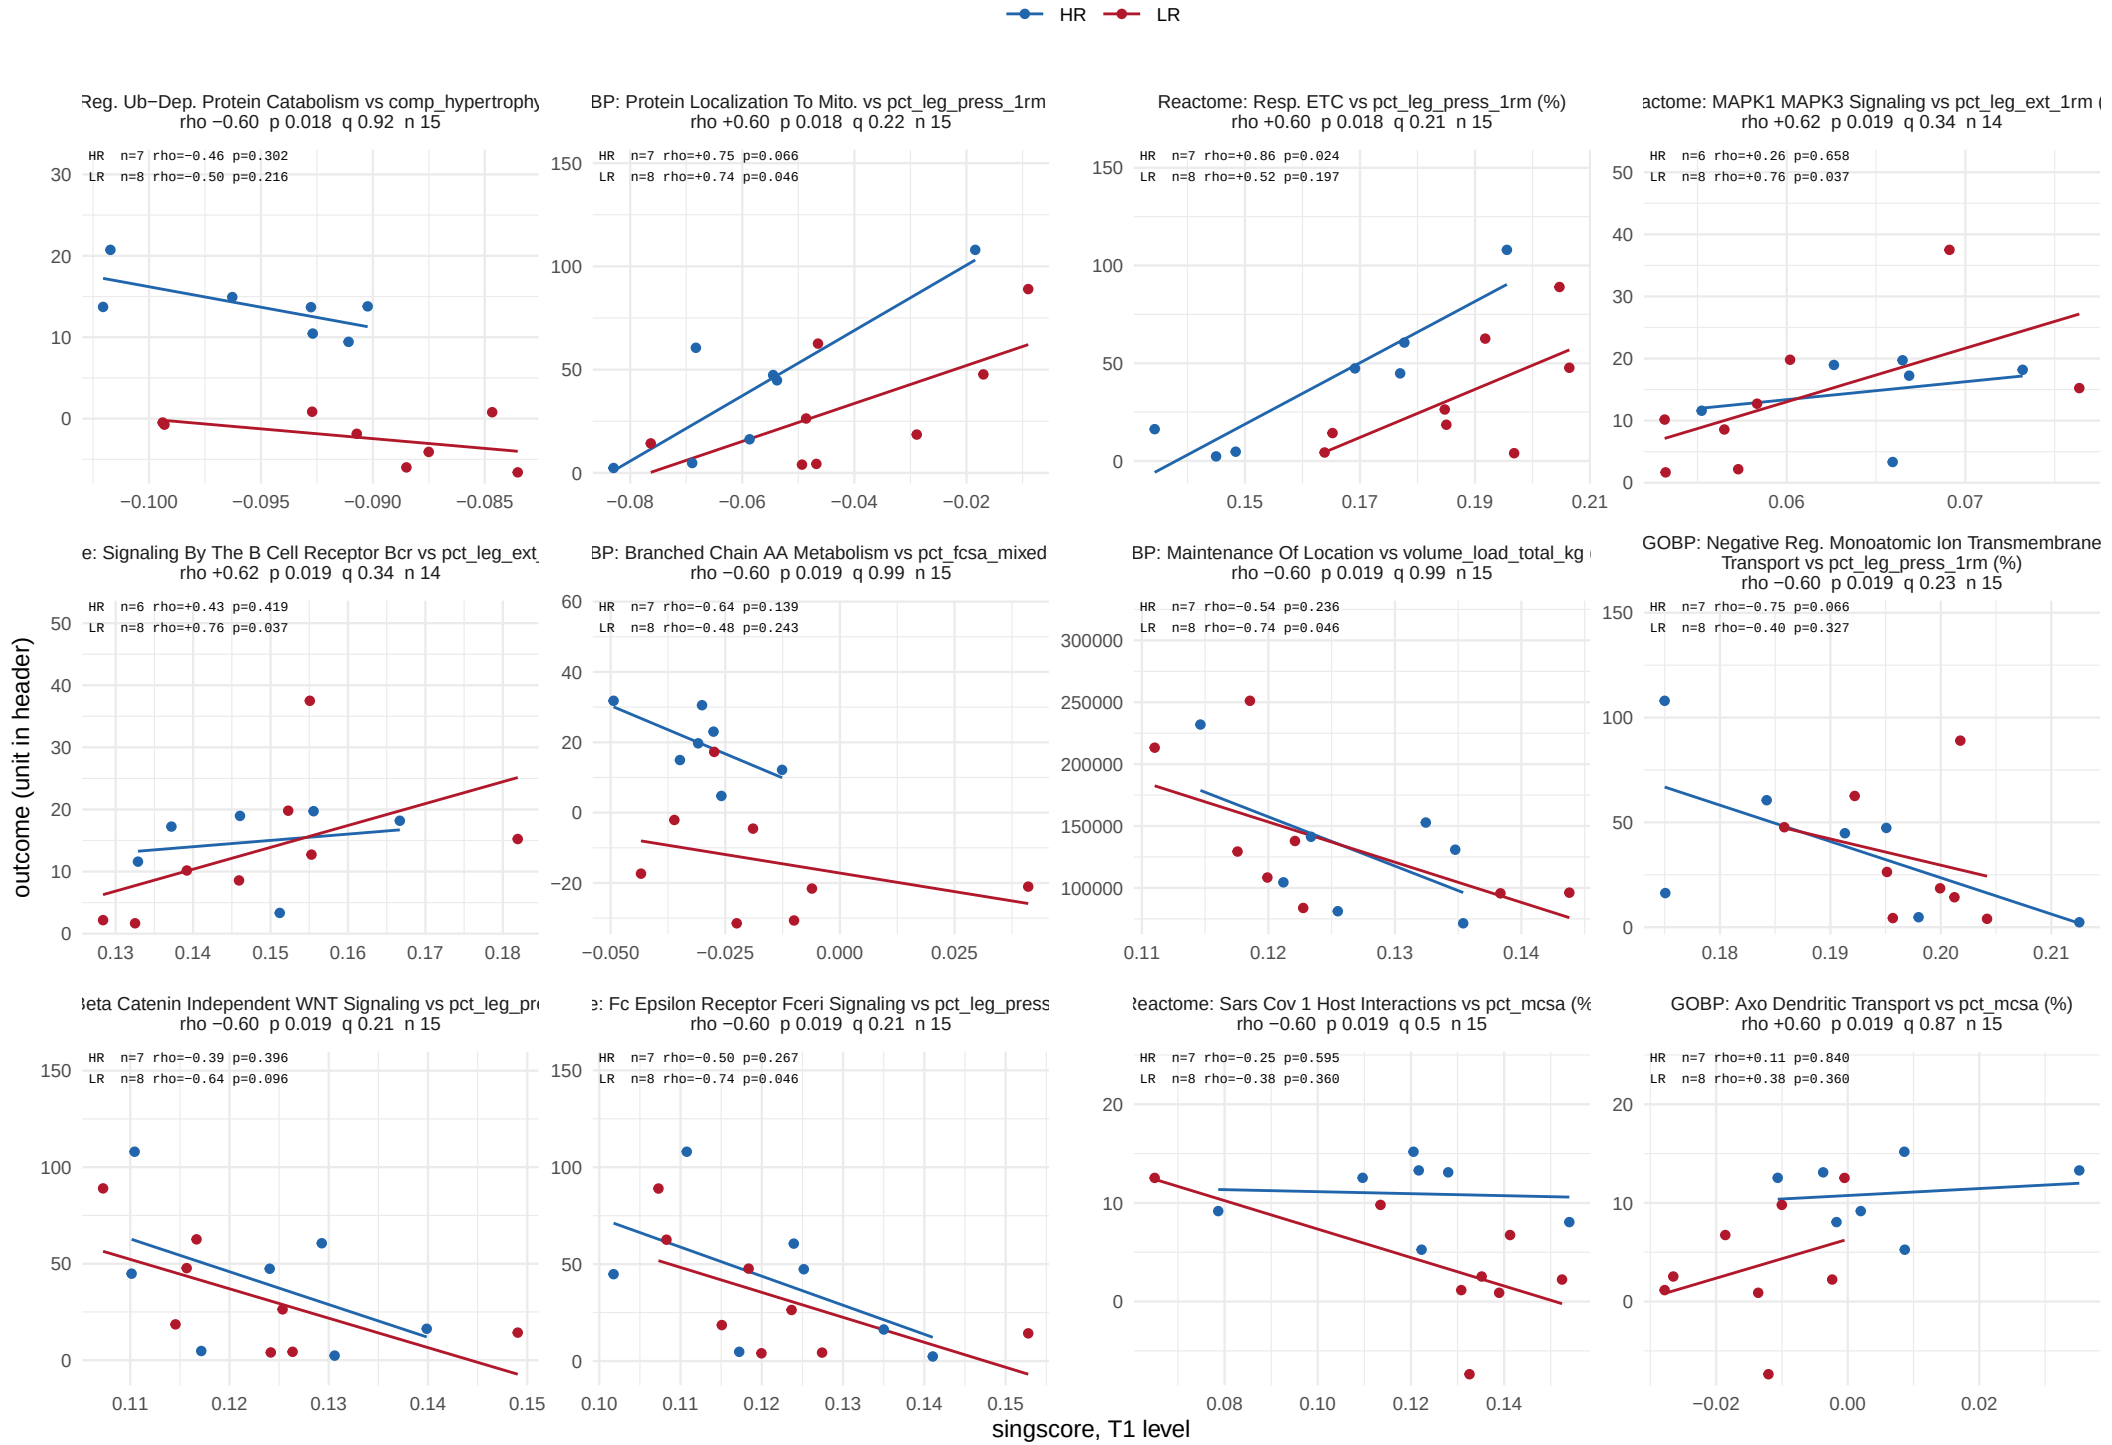


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, baseline window


626 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 19 of 53.

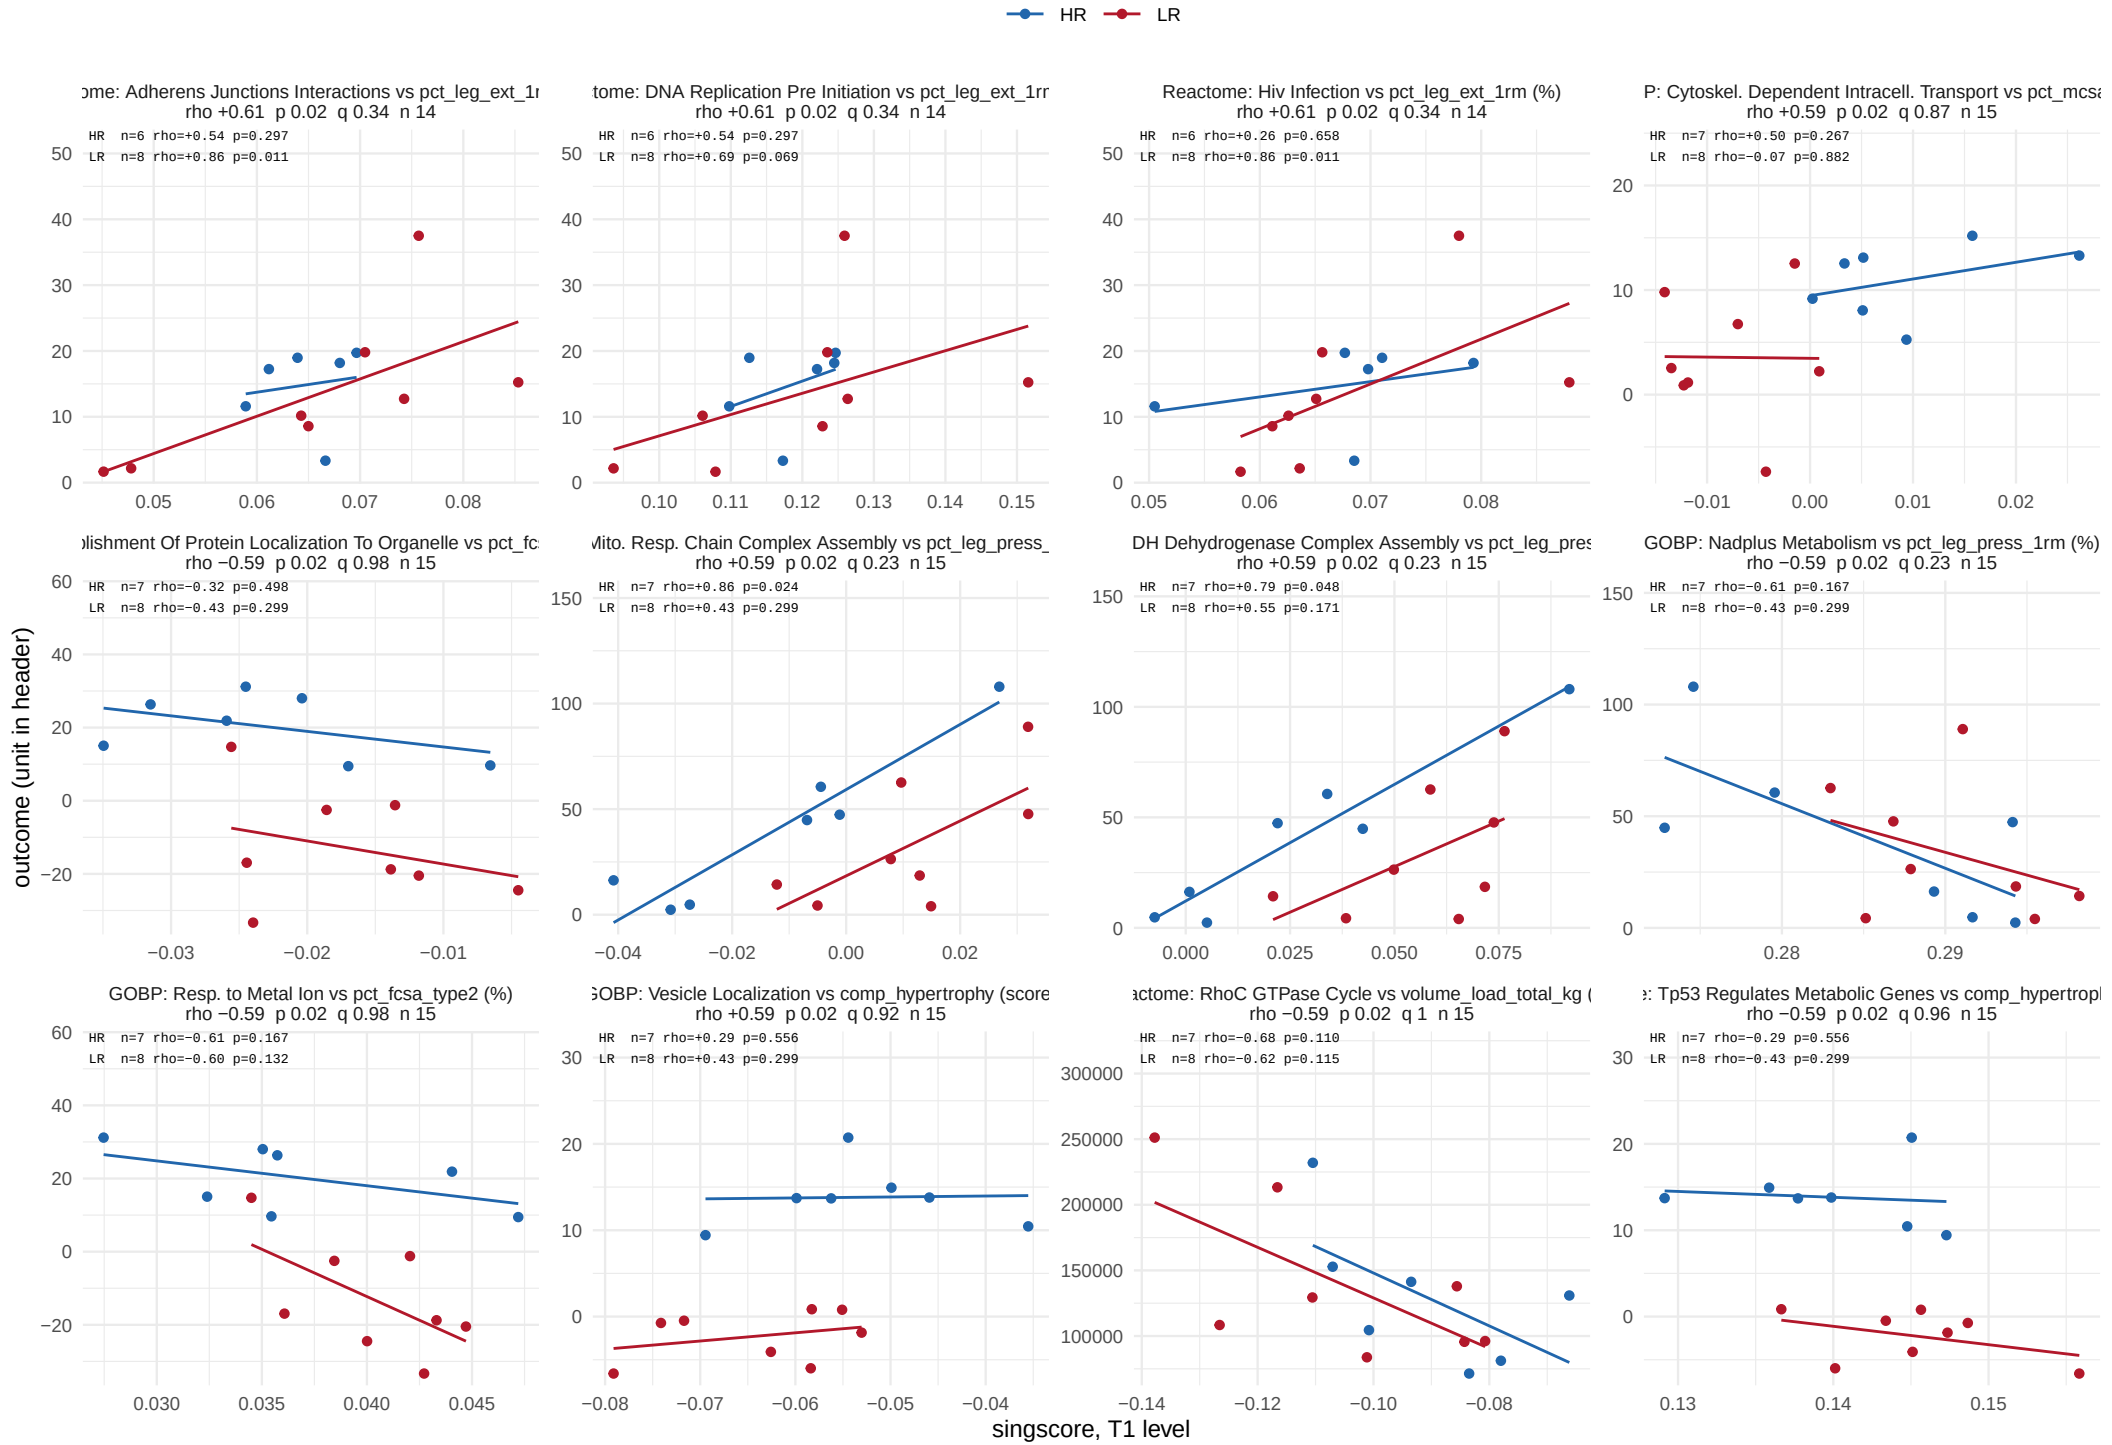


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, baseline window


626 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 20 of 53.

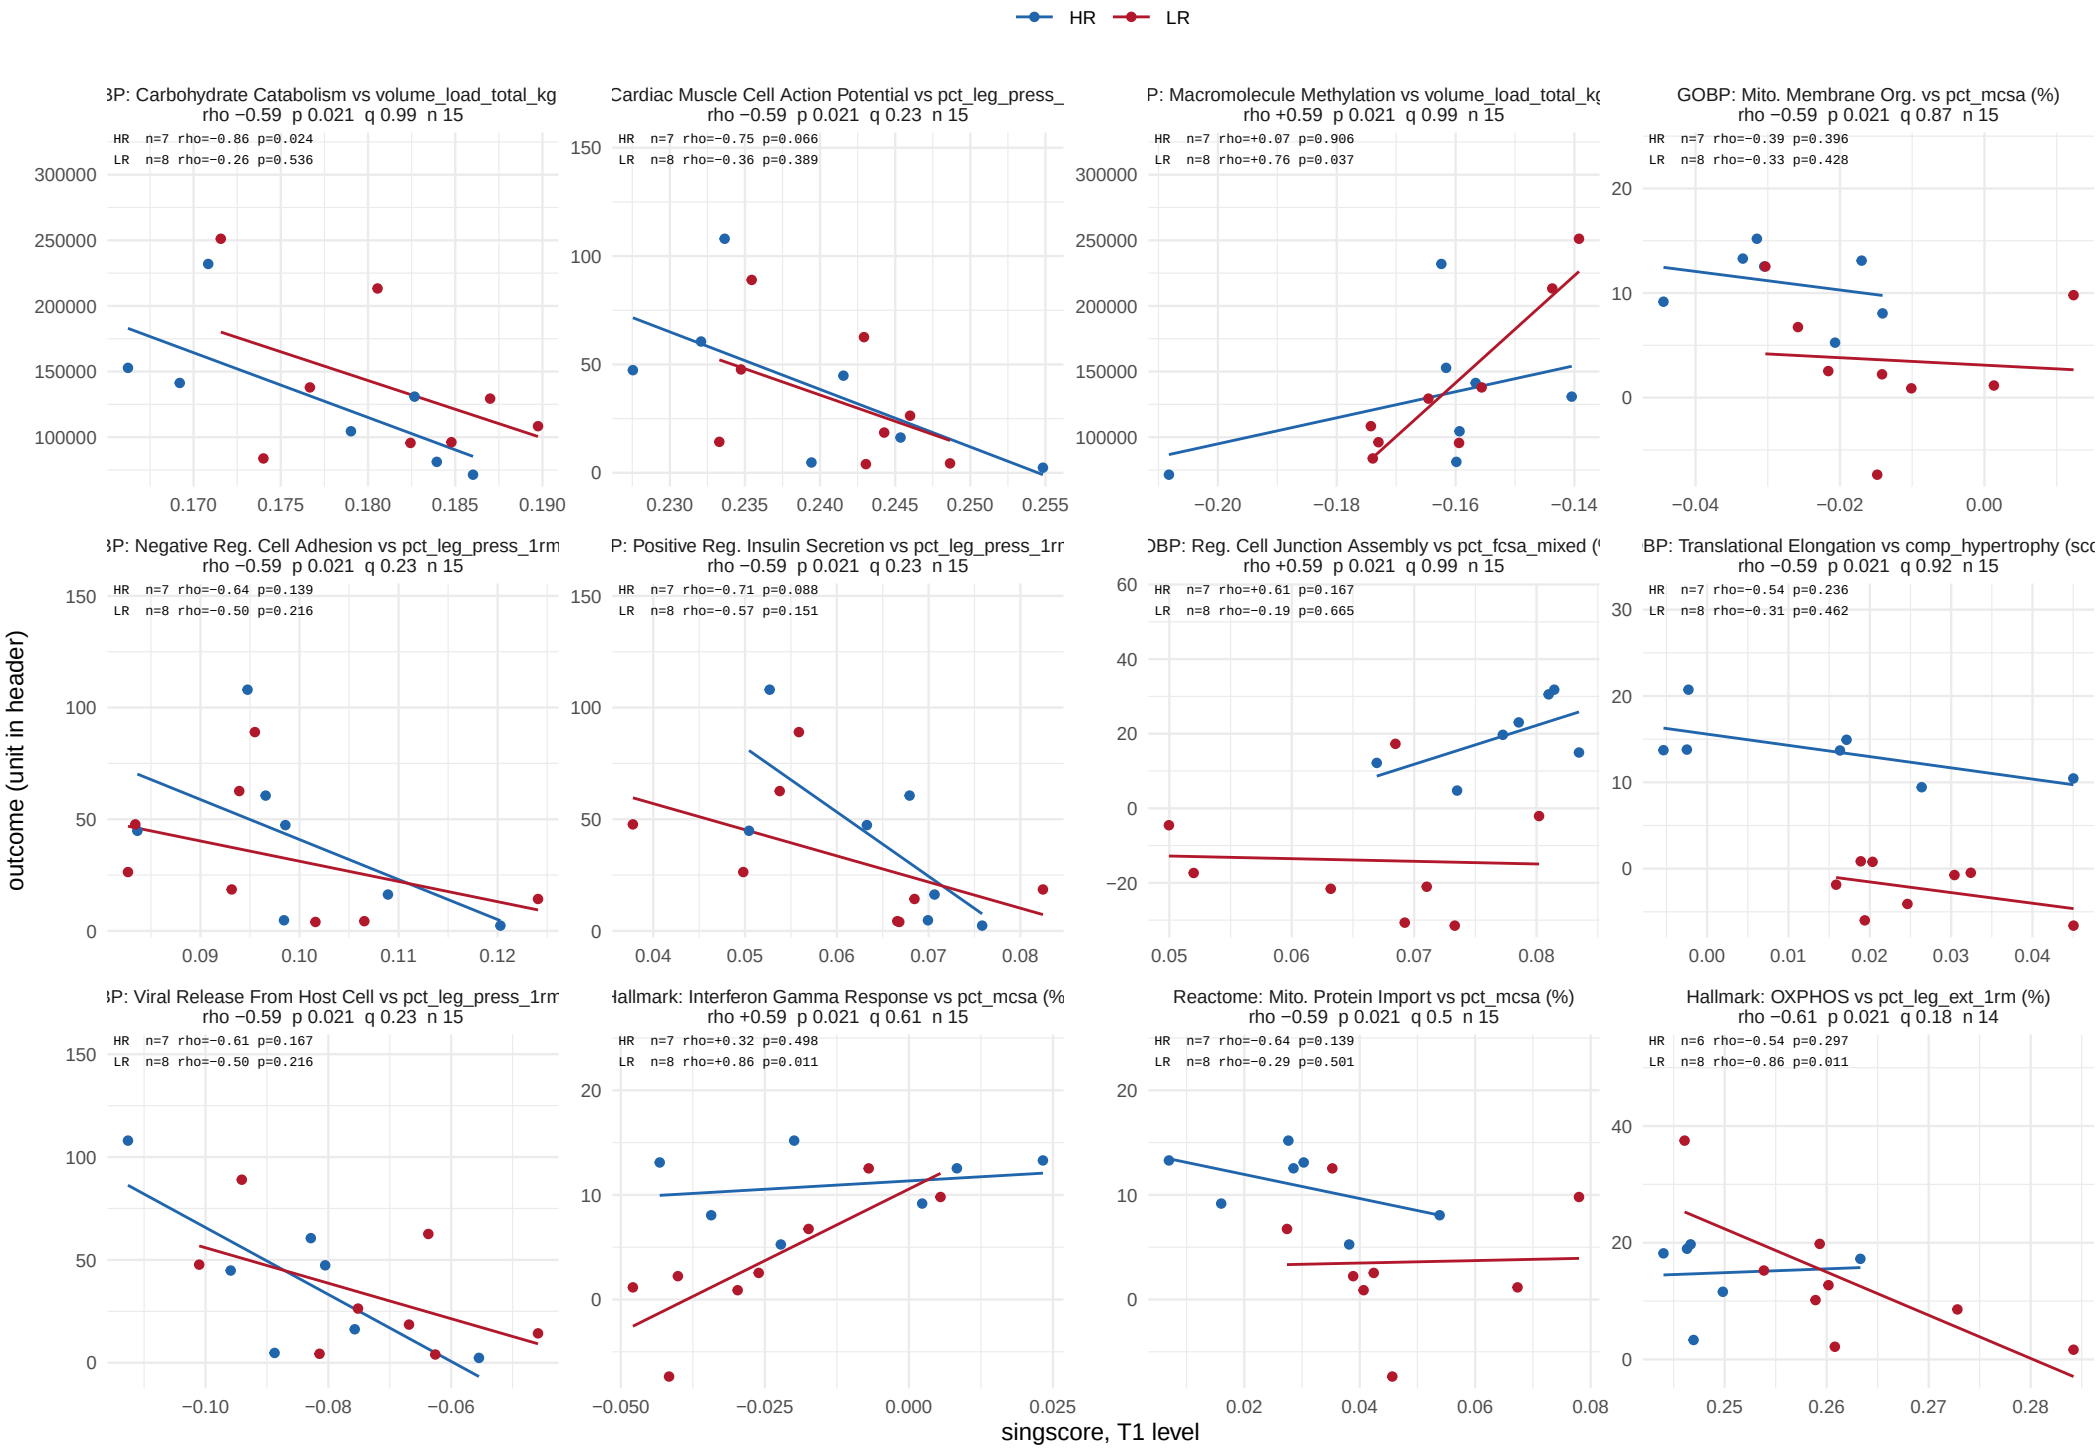


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, baseline window


626 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 21 of 53.

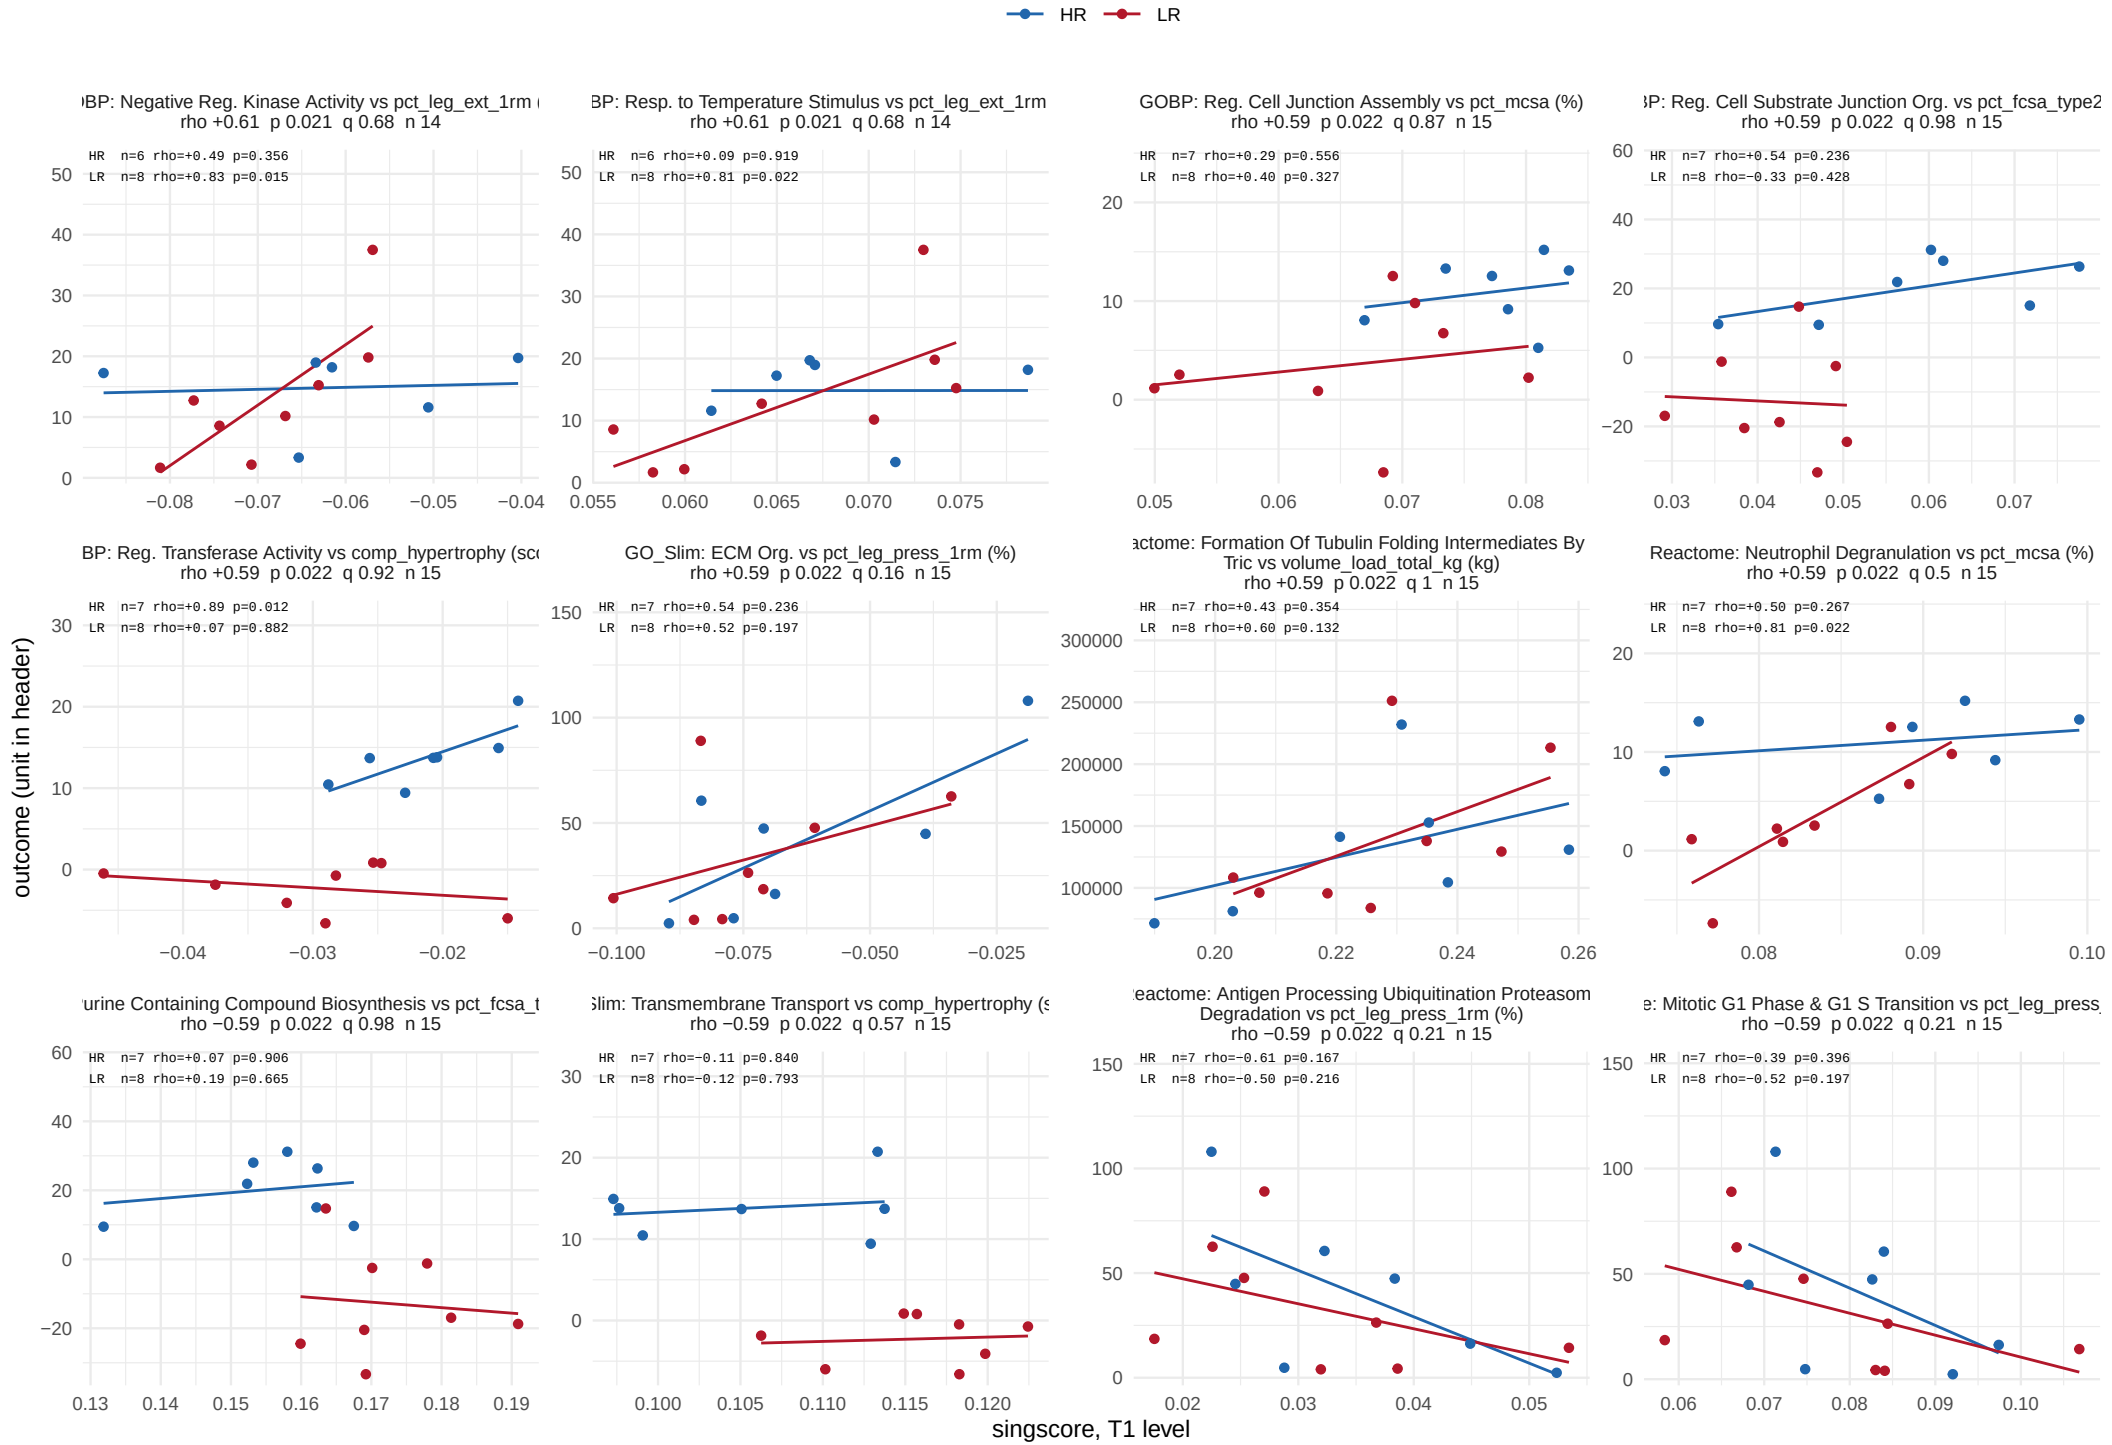


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, baseline window


626 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 22 of 53.

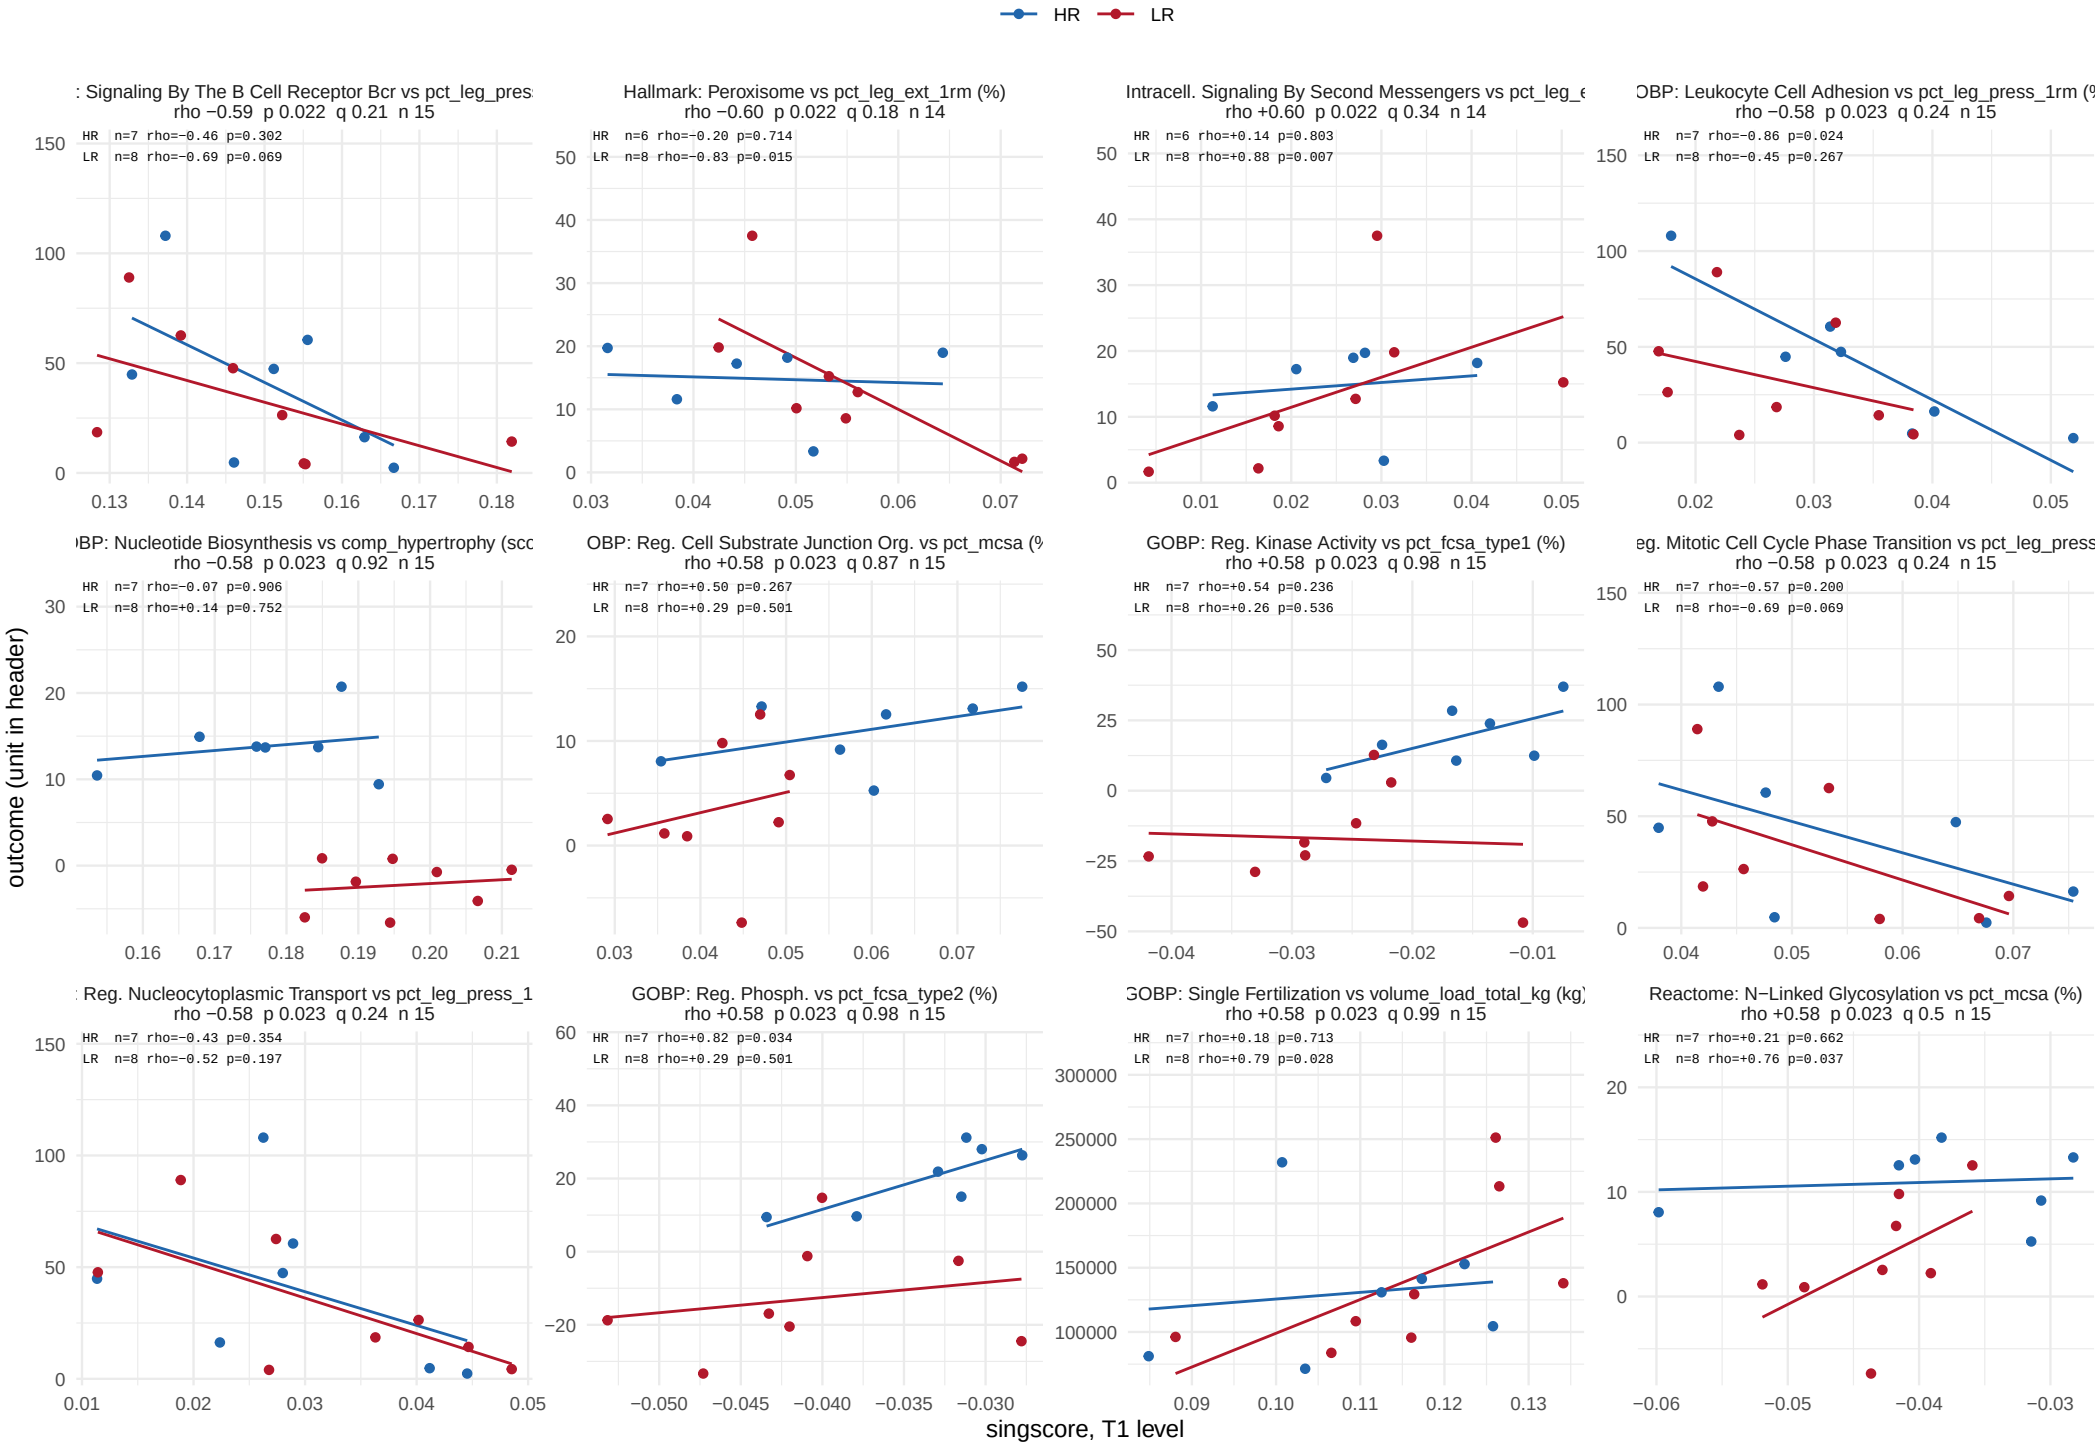


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, baseline window


626 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 23 of 53.

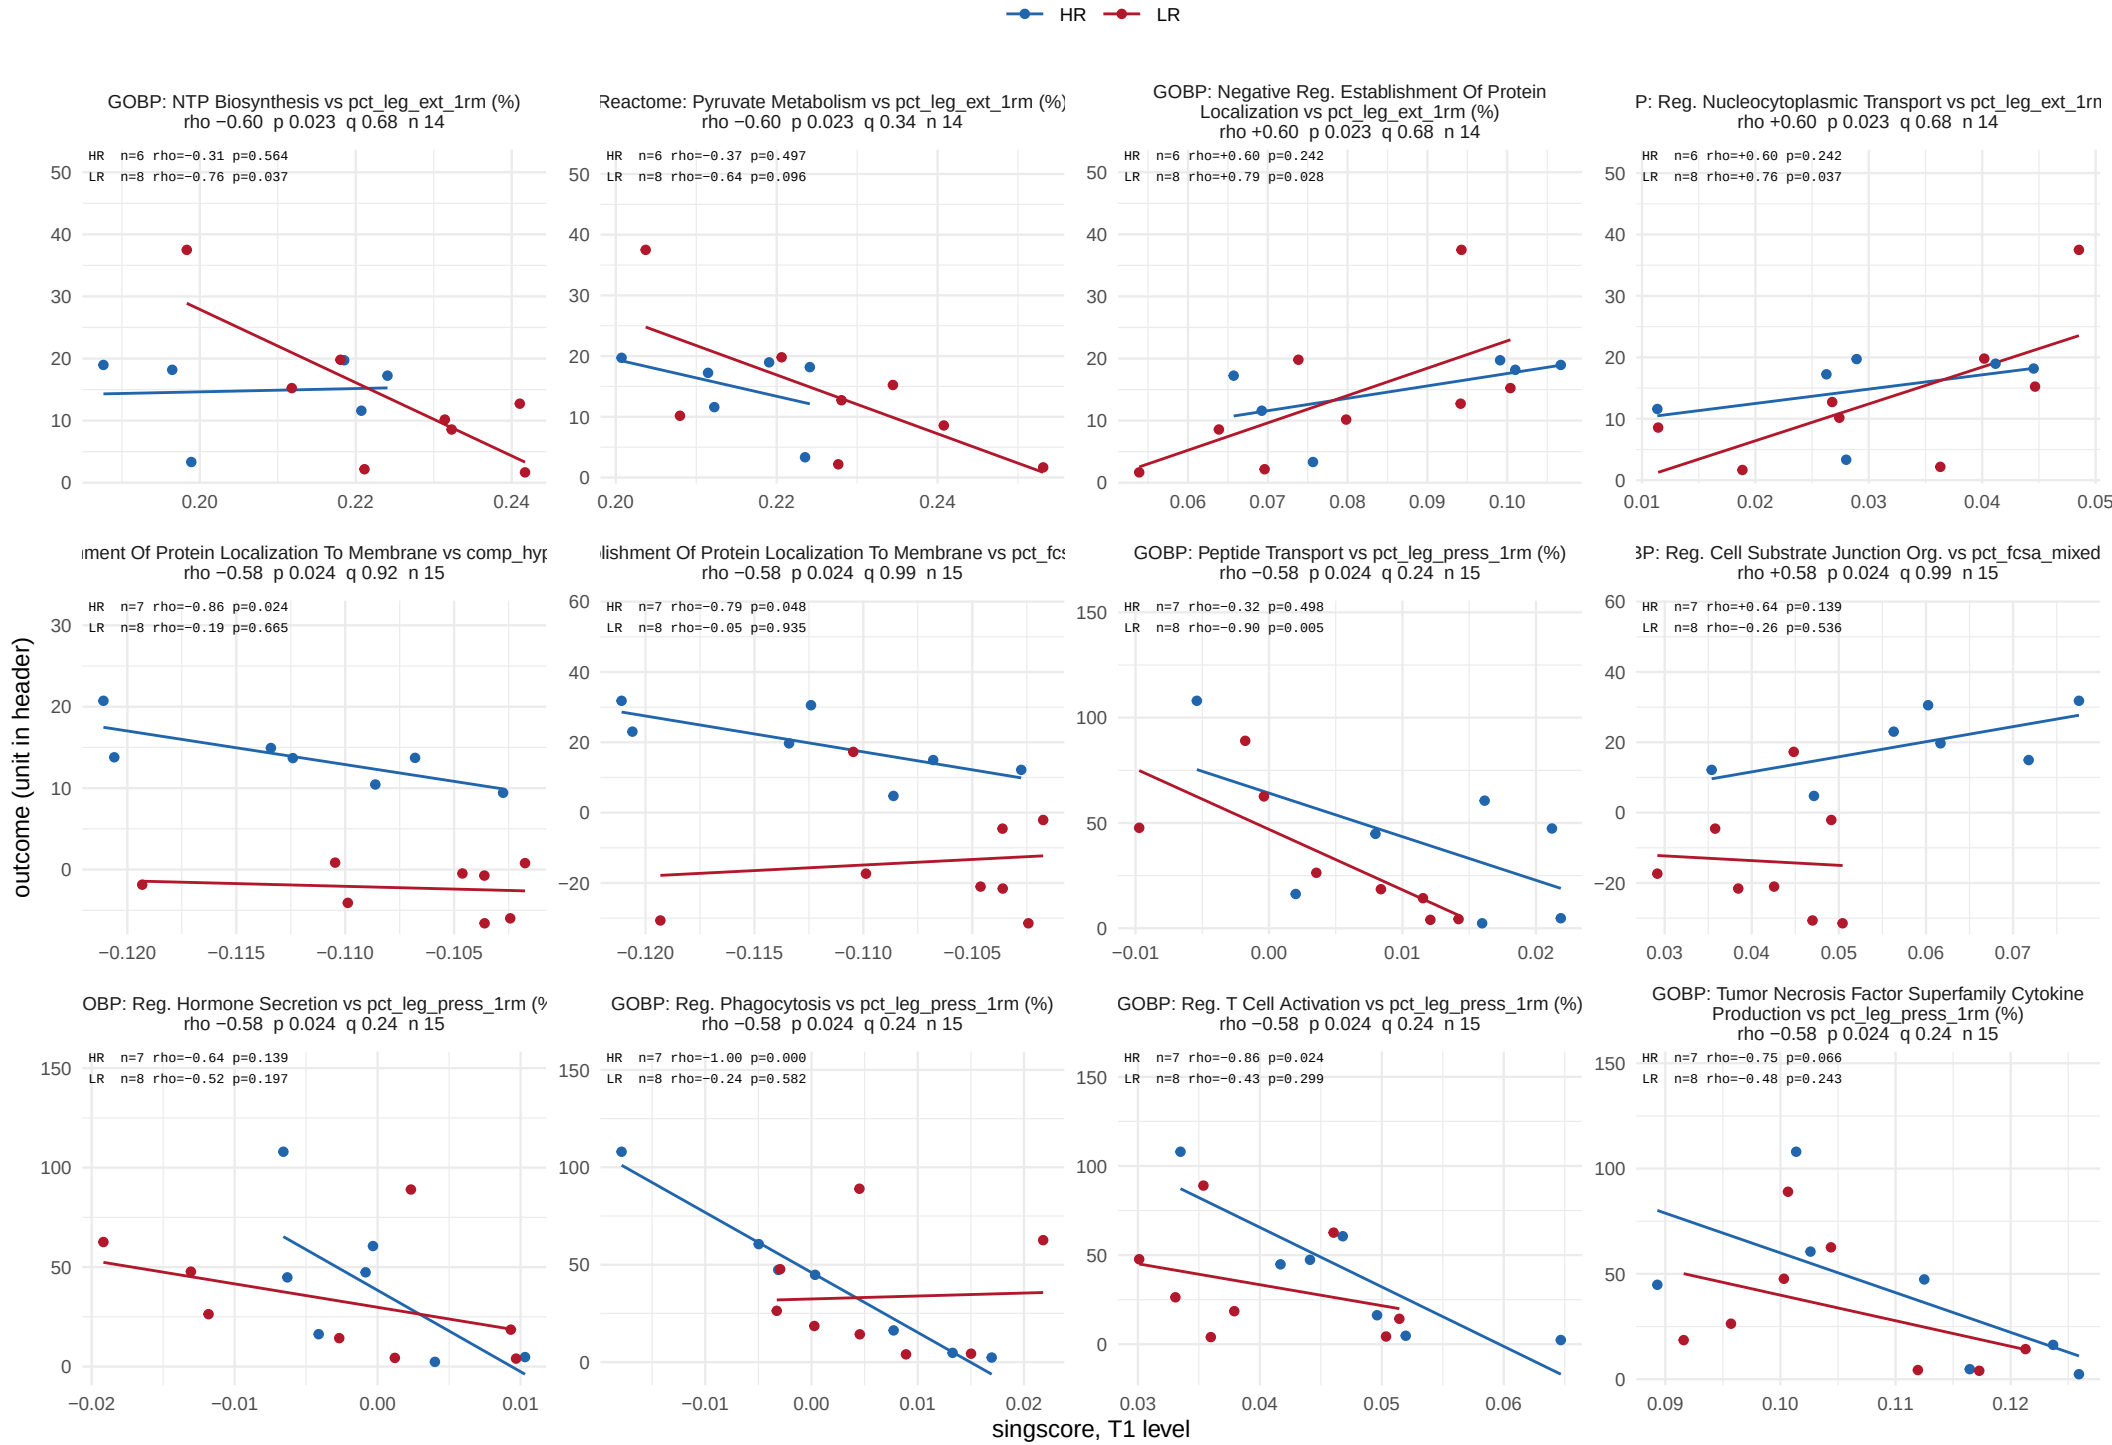


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, baseline window


626 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 24 of 53.

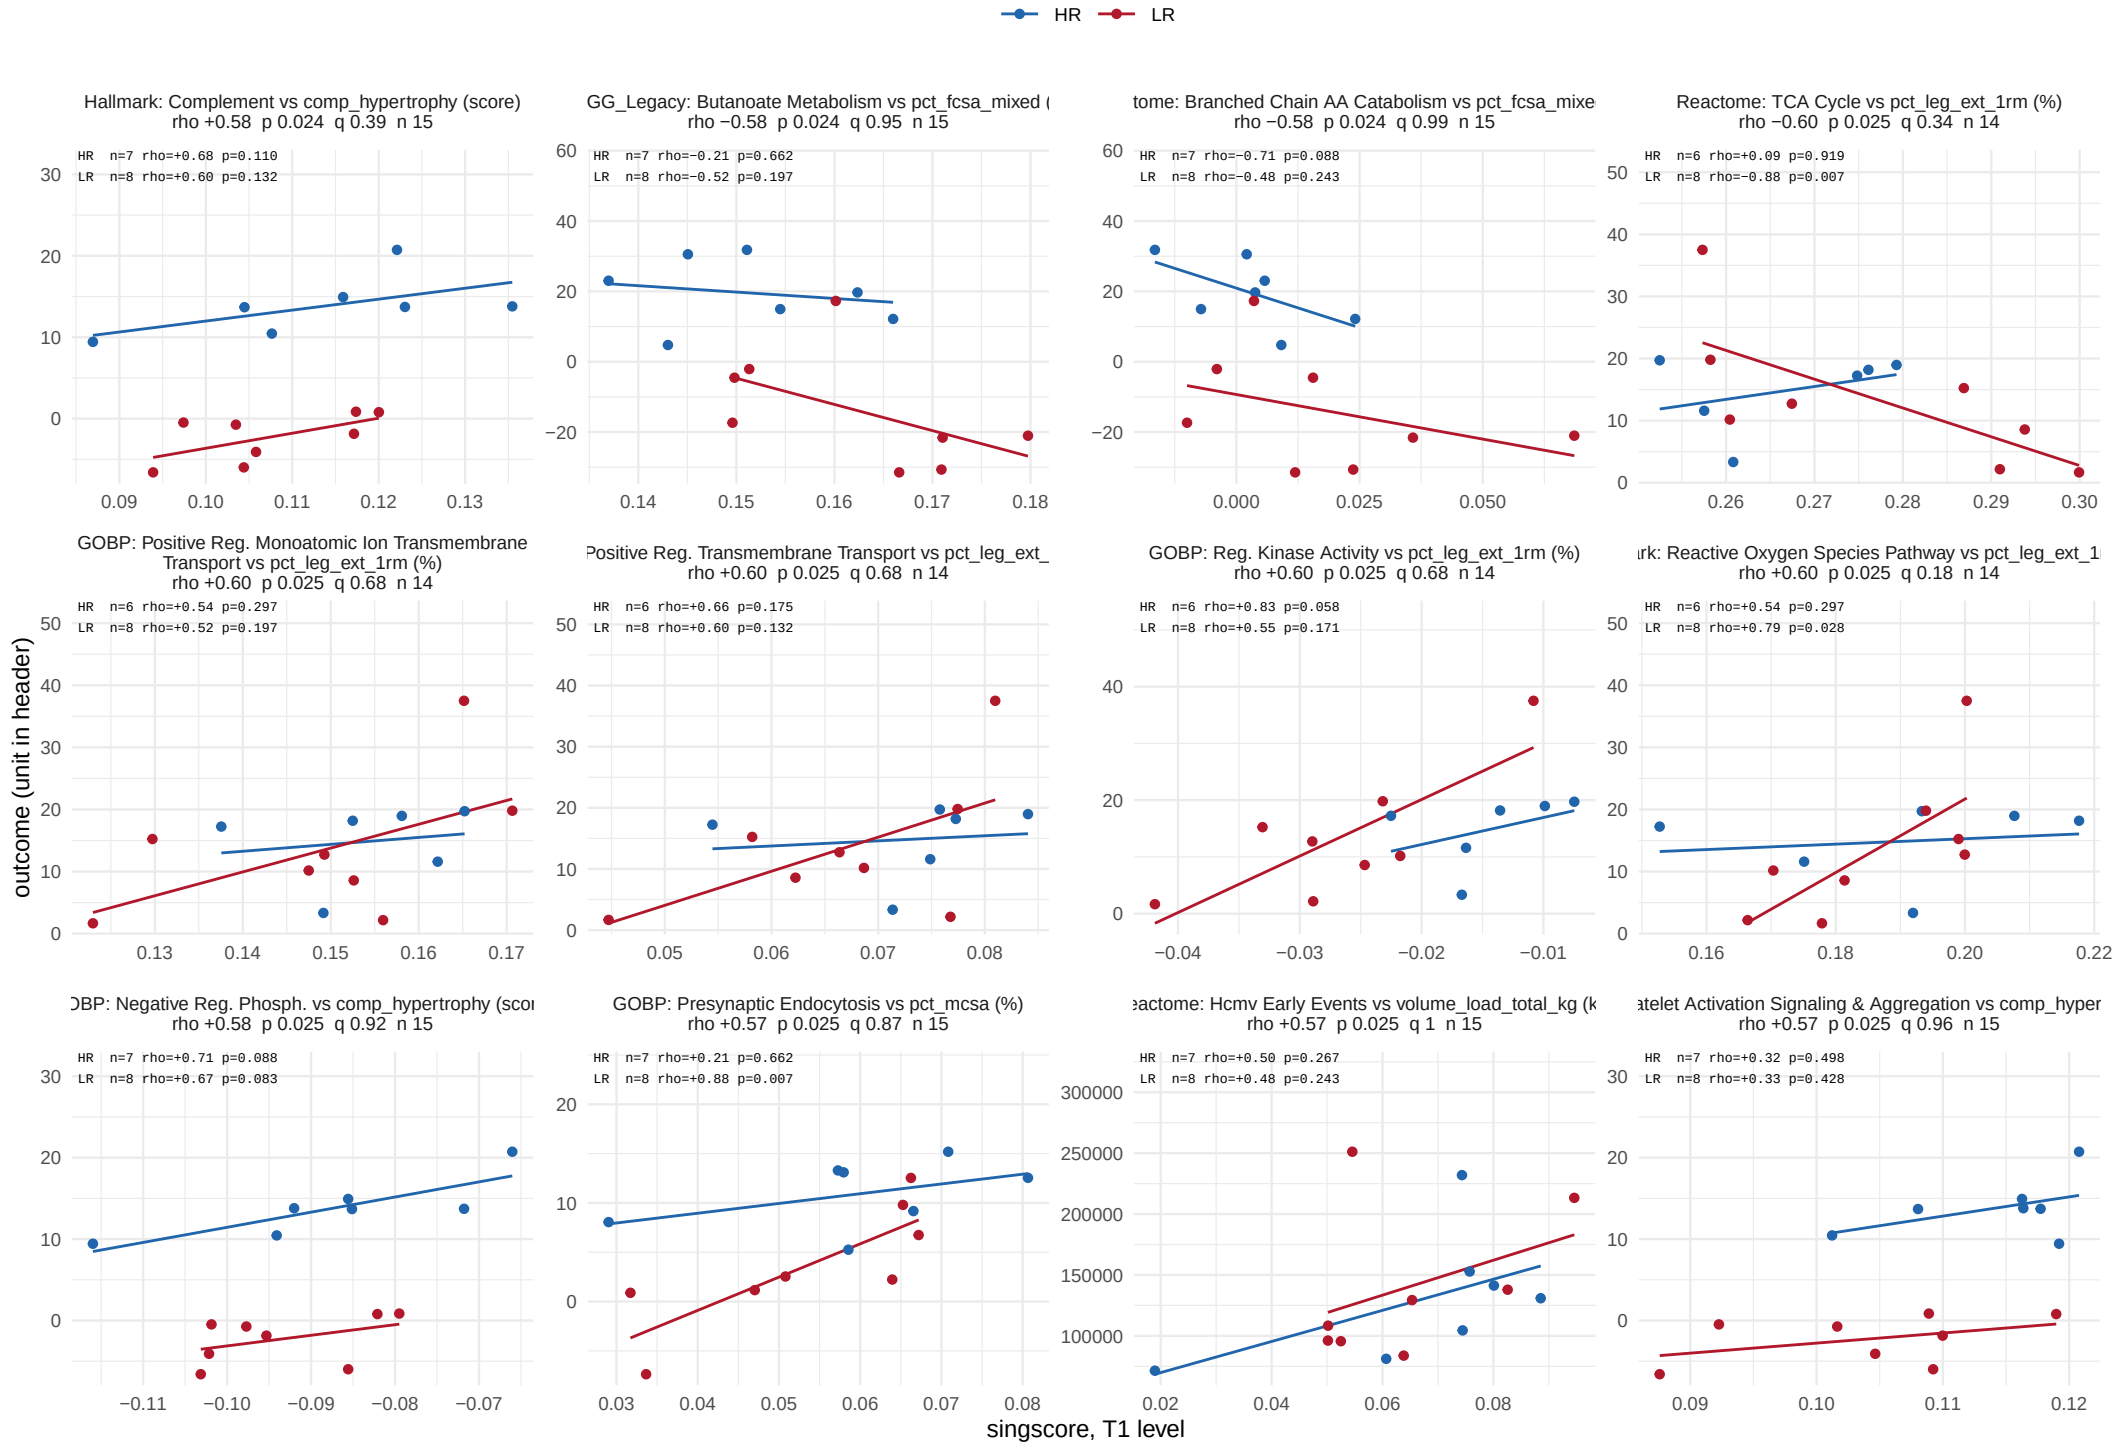


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, baseline window


626 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 25 of 53.

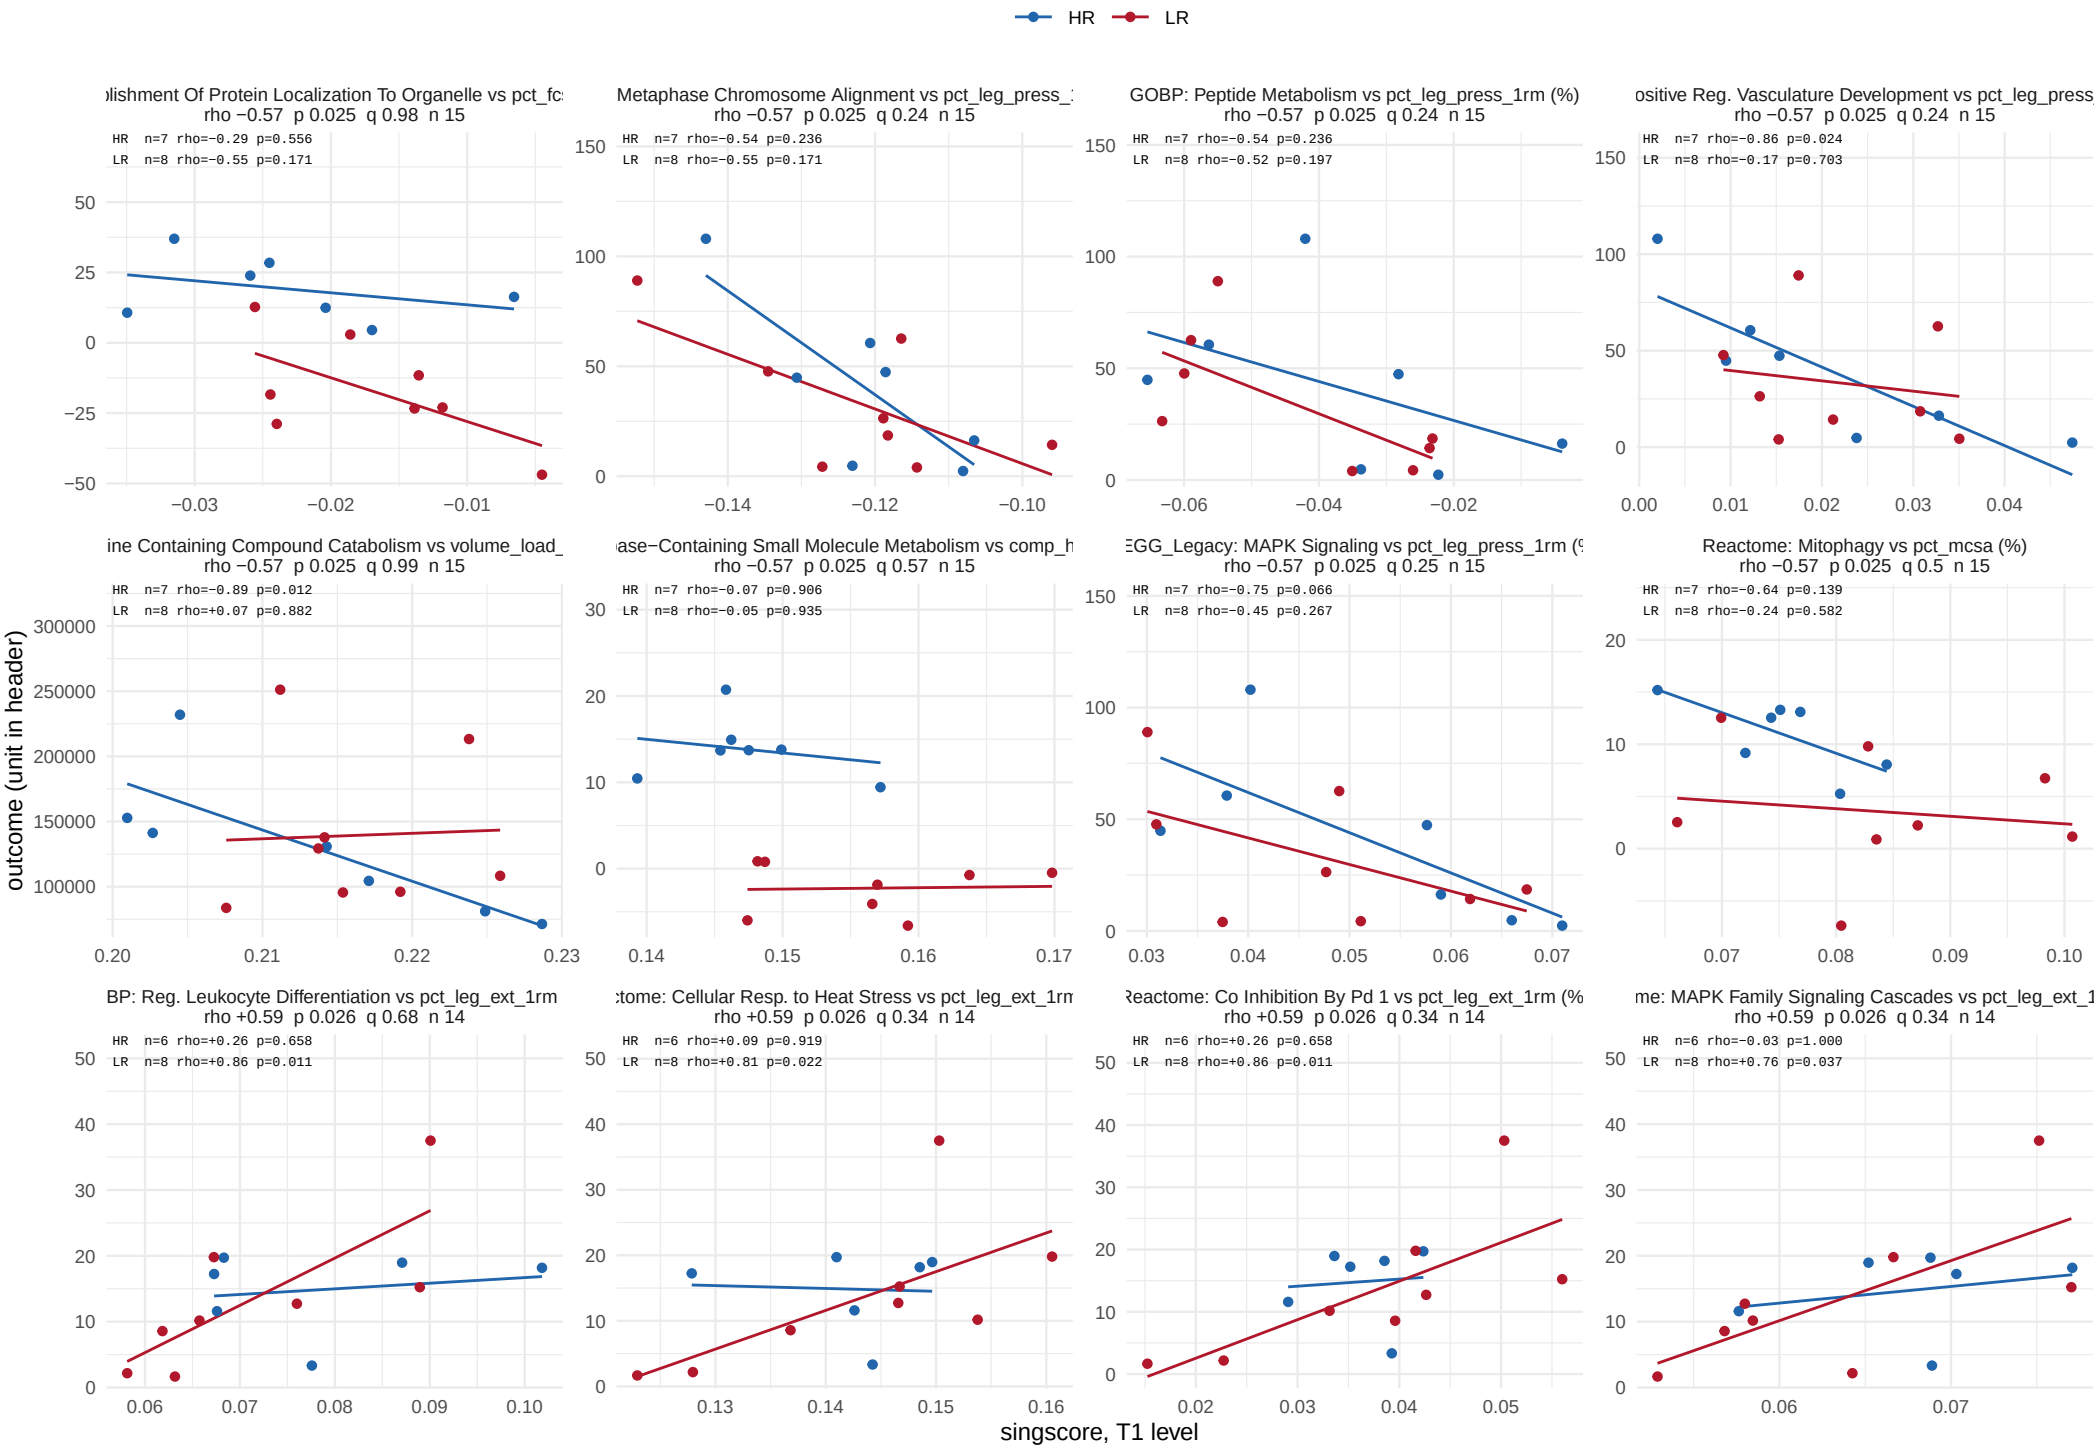


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, baseline window


626 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 26 of 53.

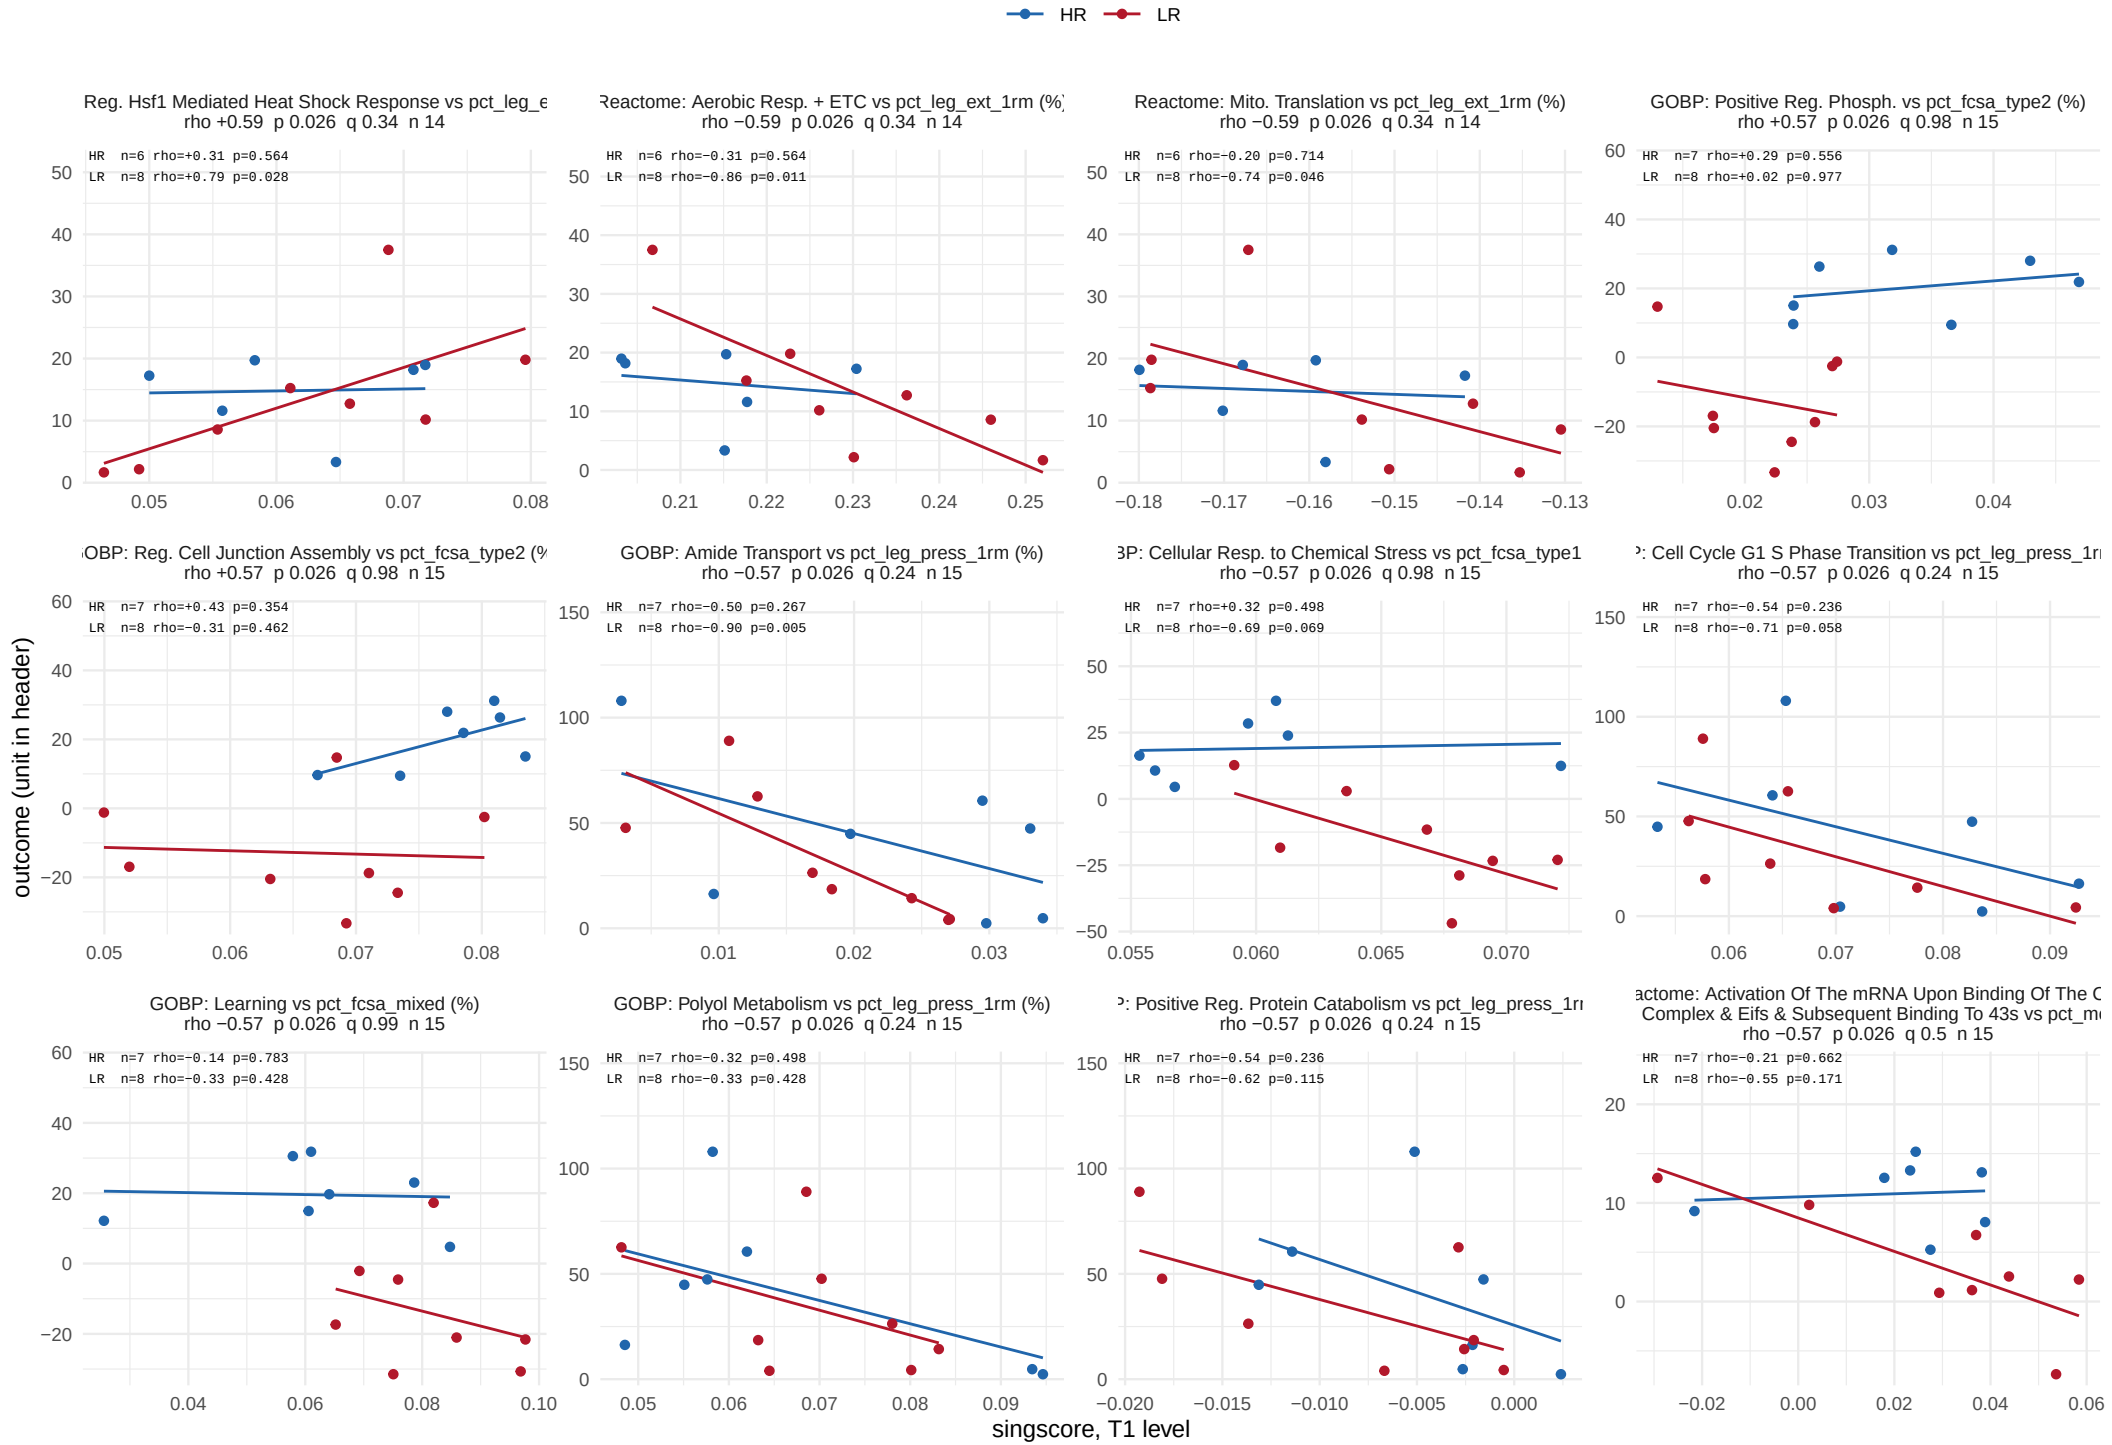


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, baseline window


626 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 27 of 53.

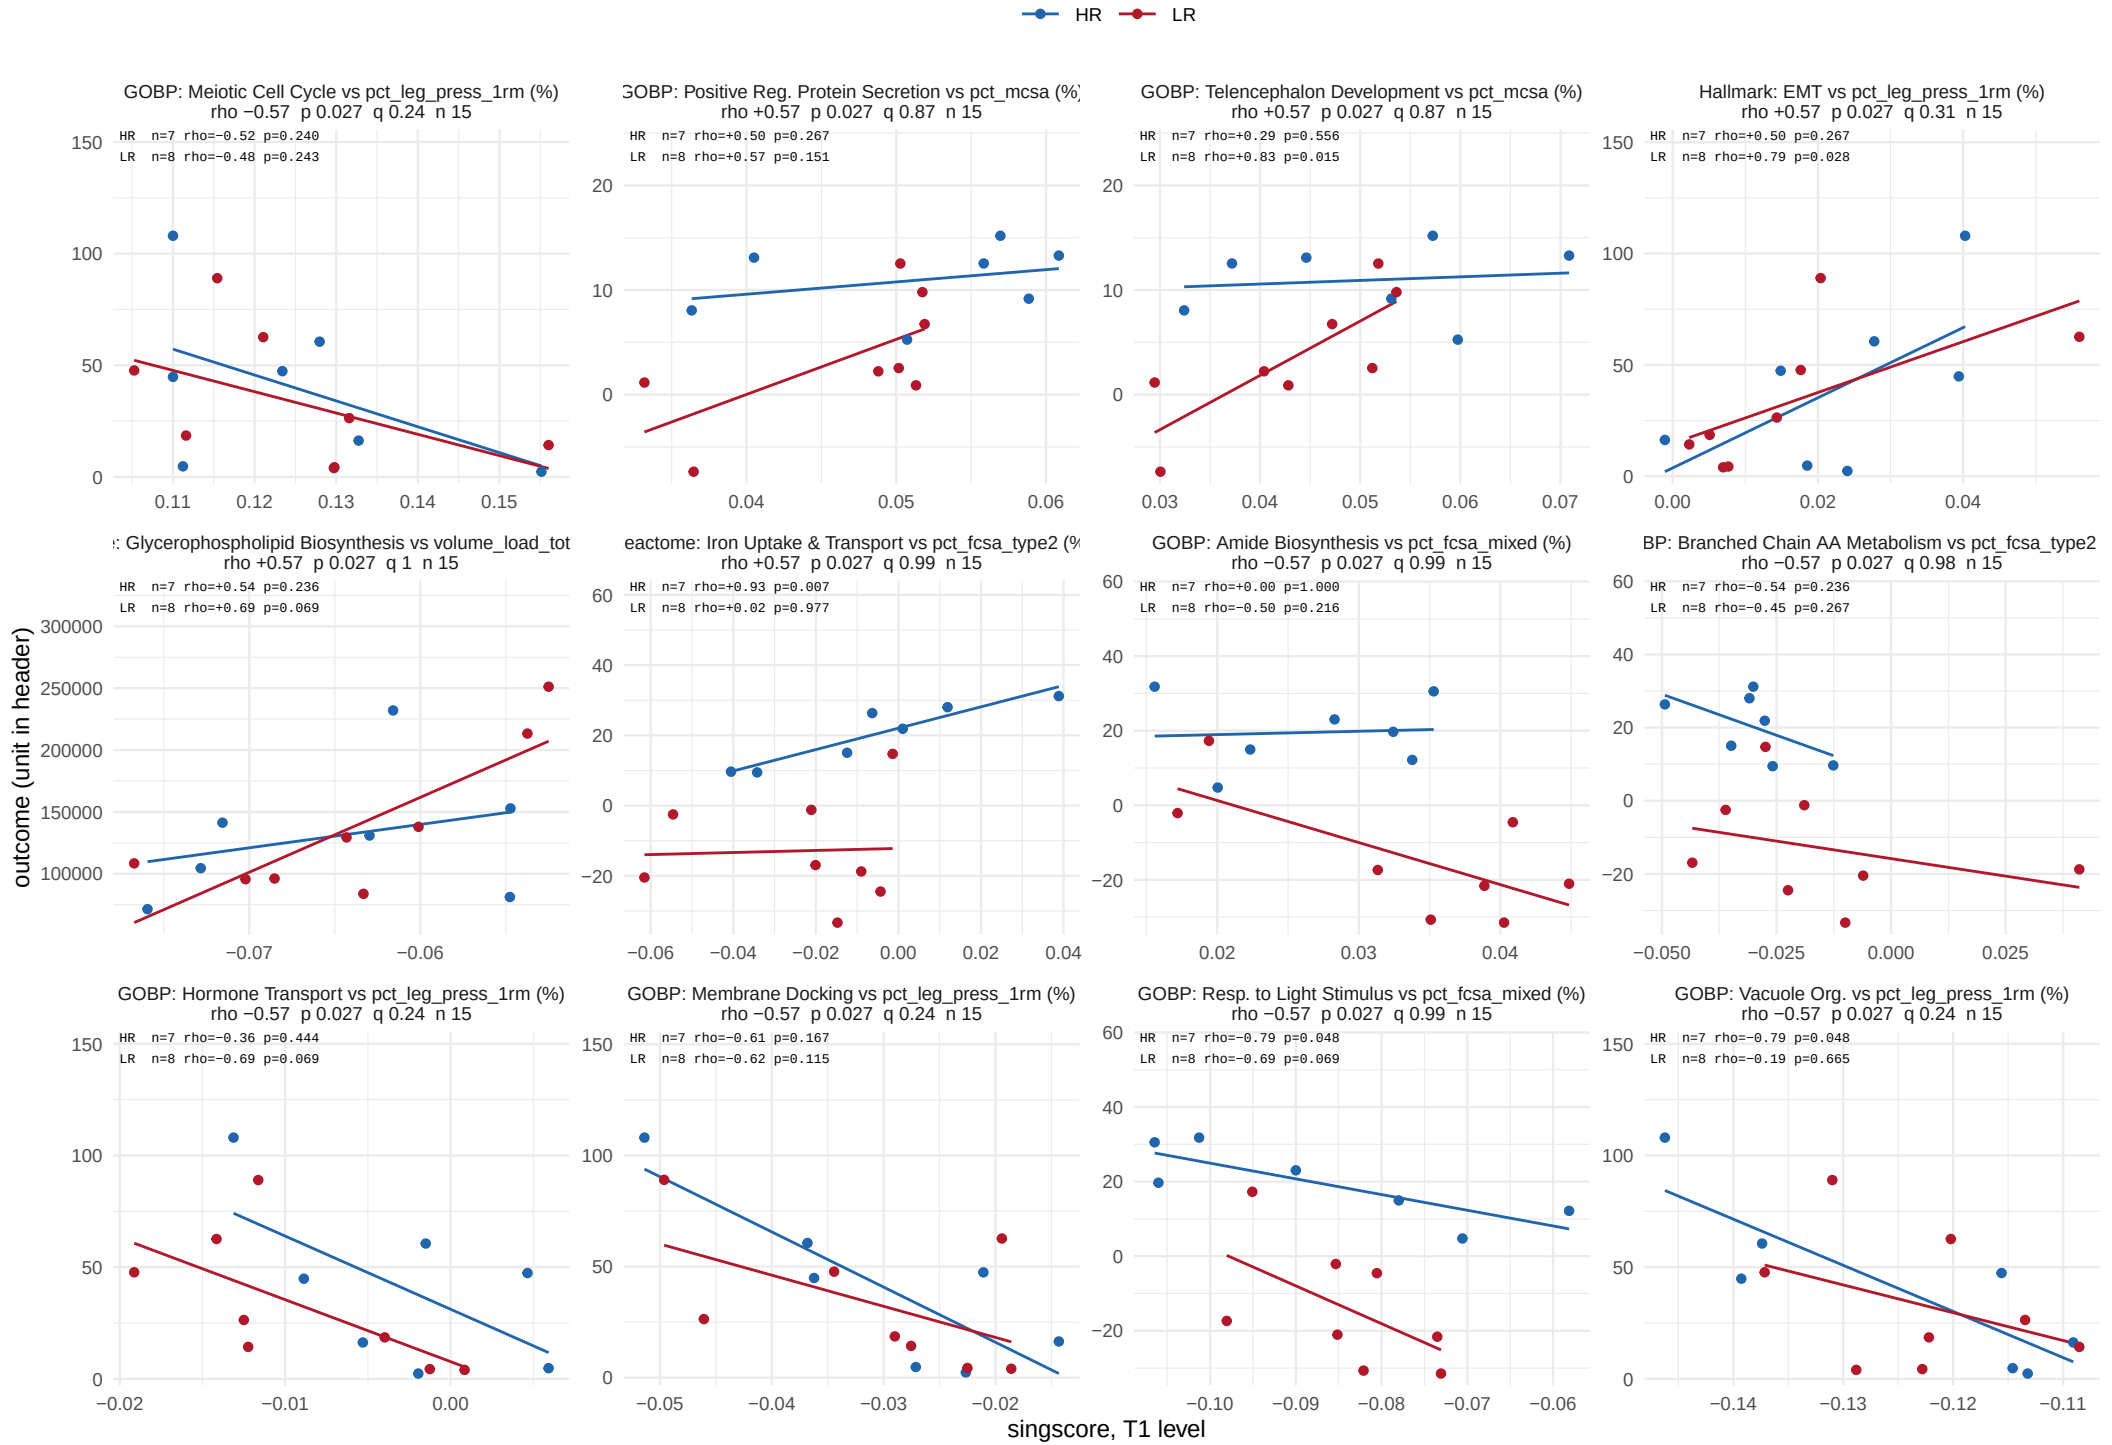


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, baseline window


626 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 28 of 53.

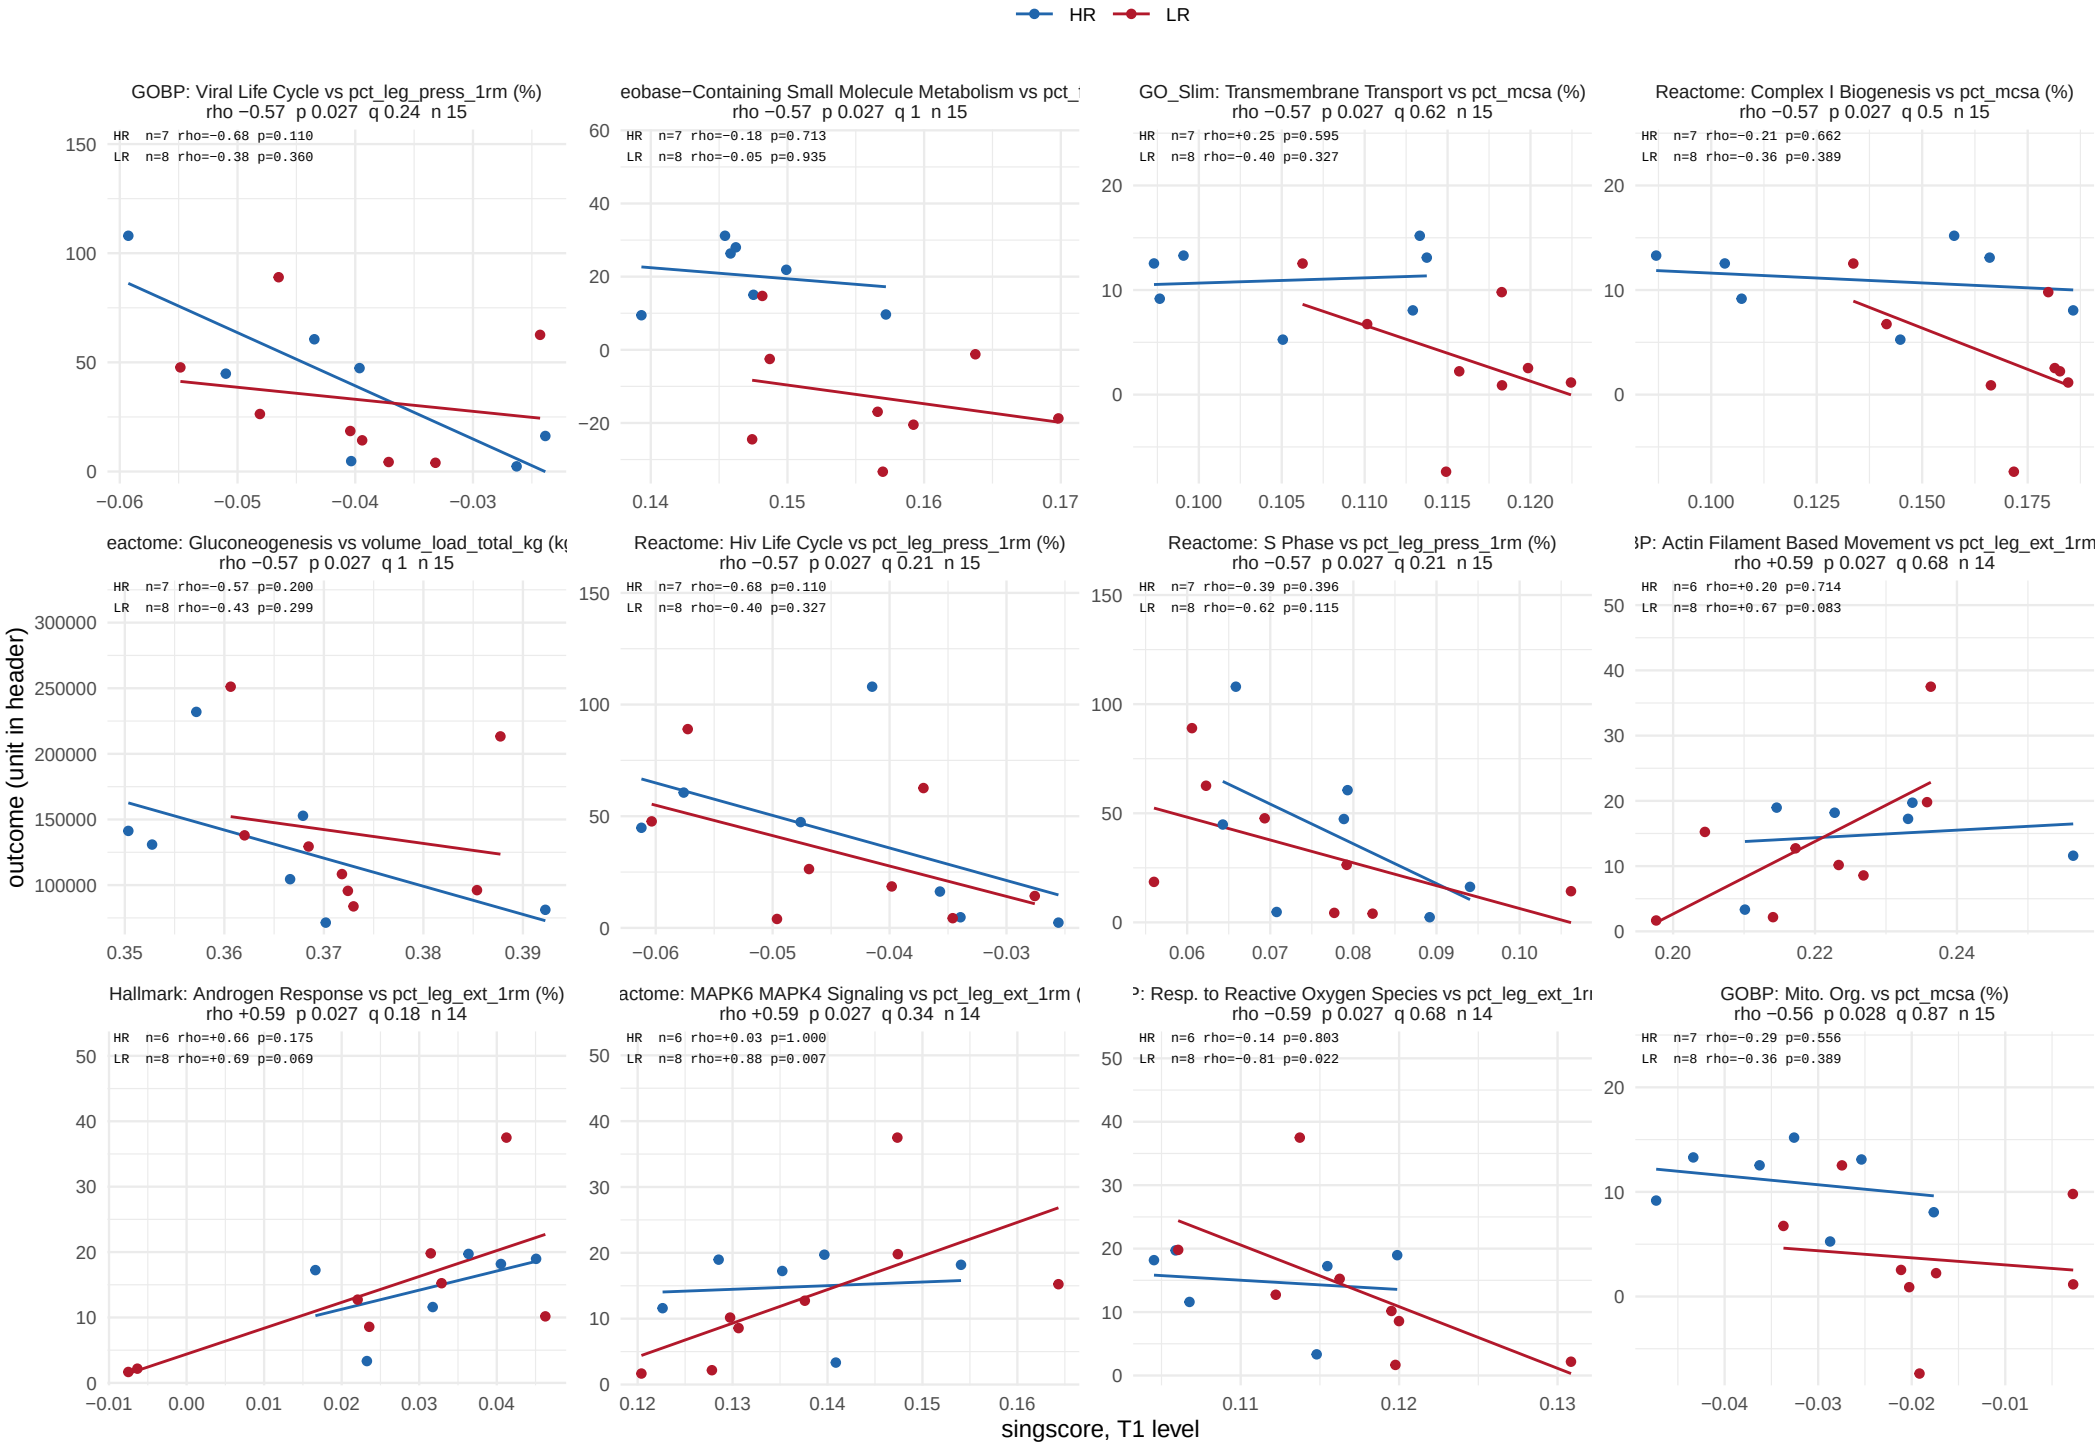


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, baseline window


626 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 29 of 53.

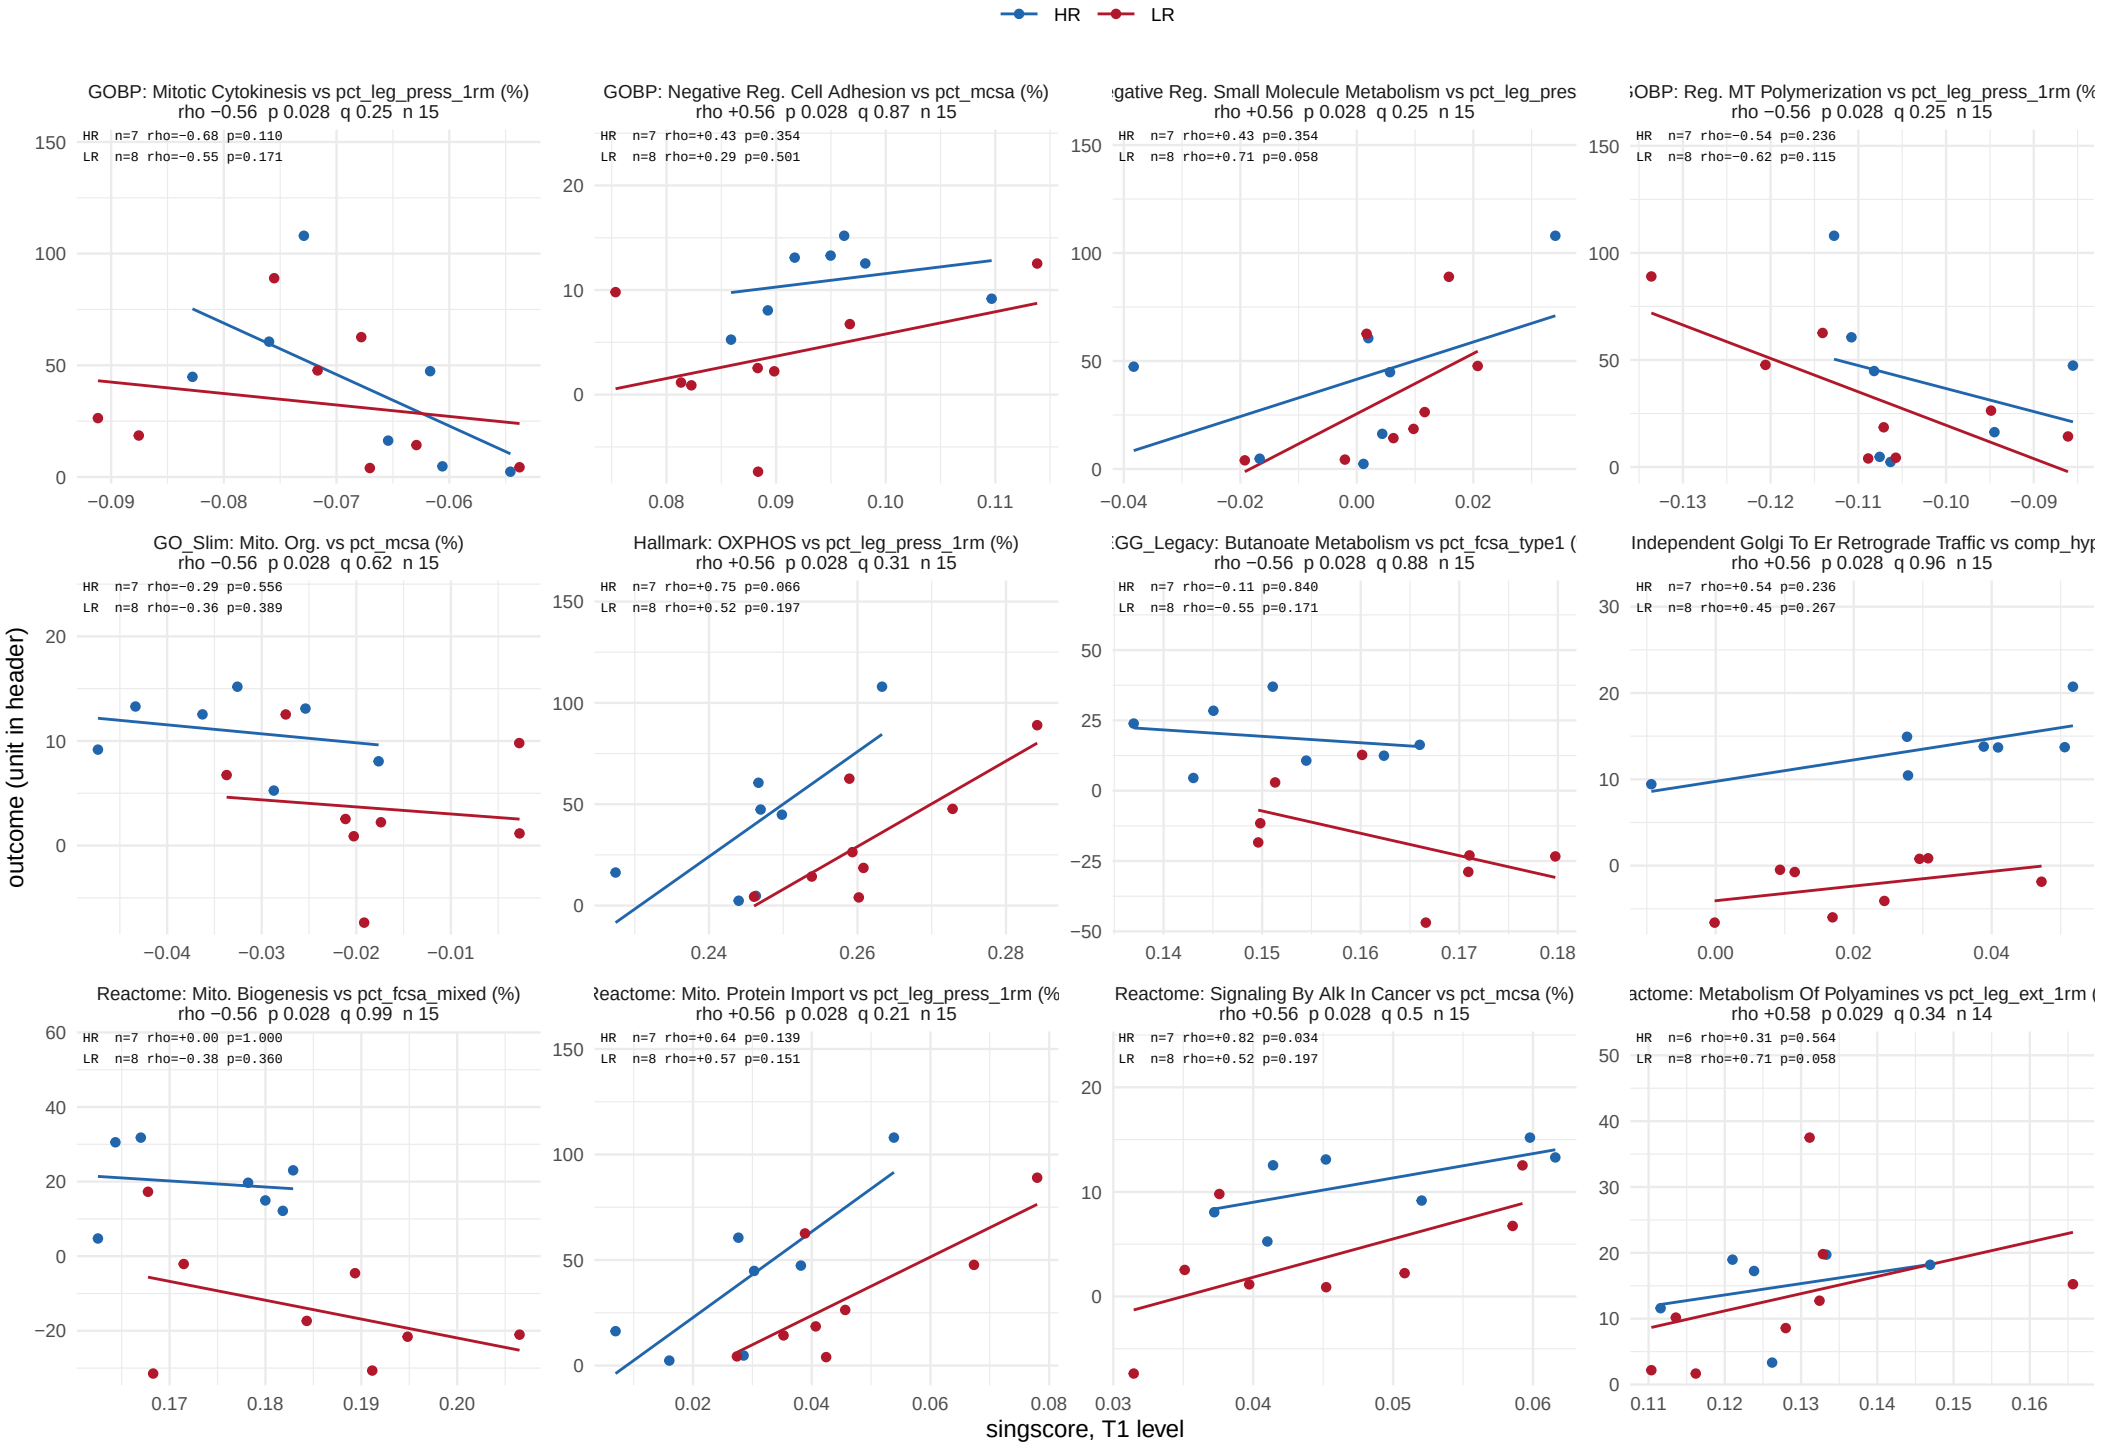


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, baseline window


626 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 30 of 53.

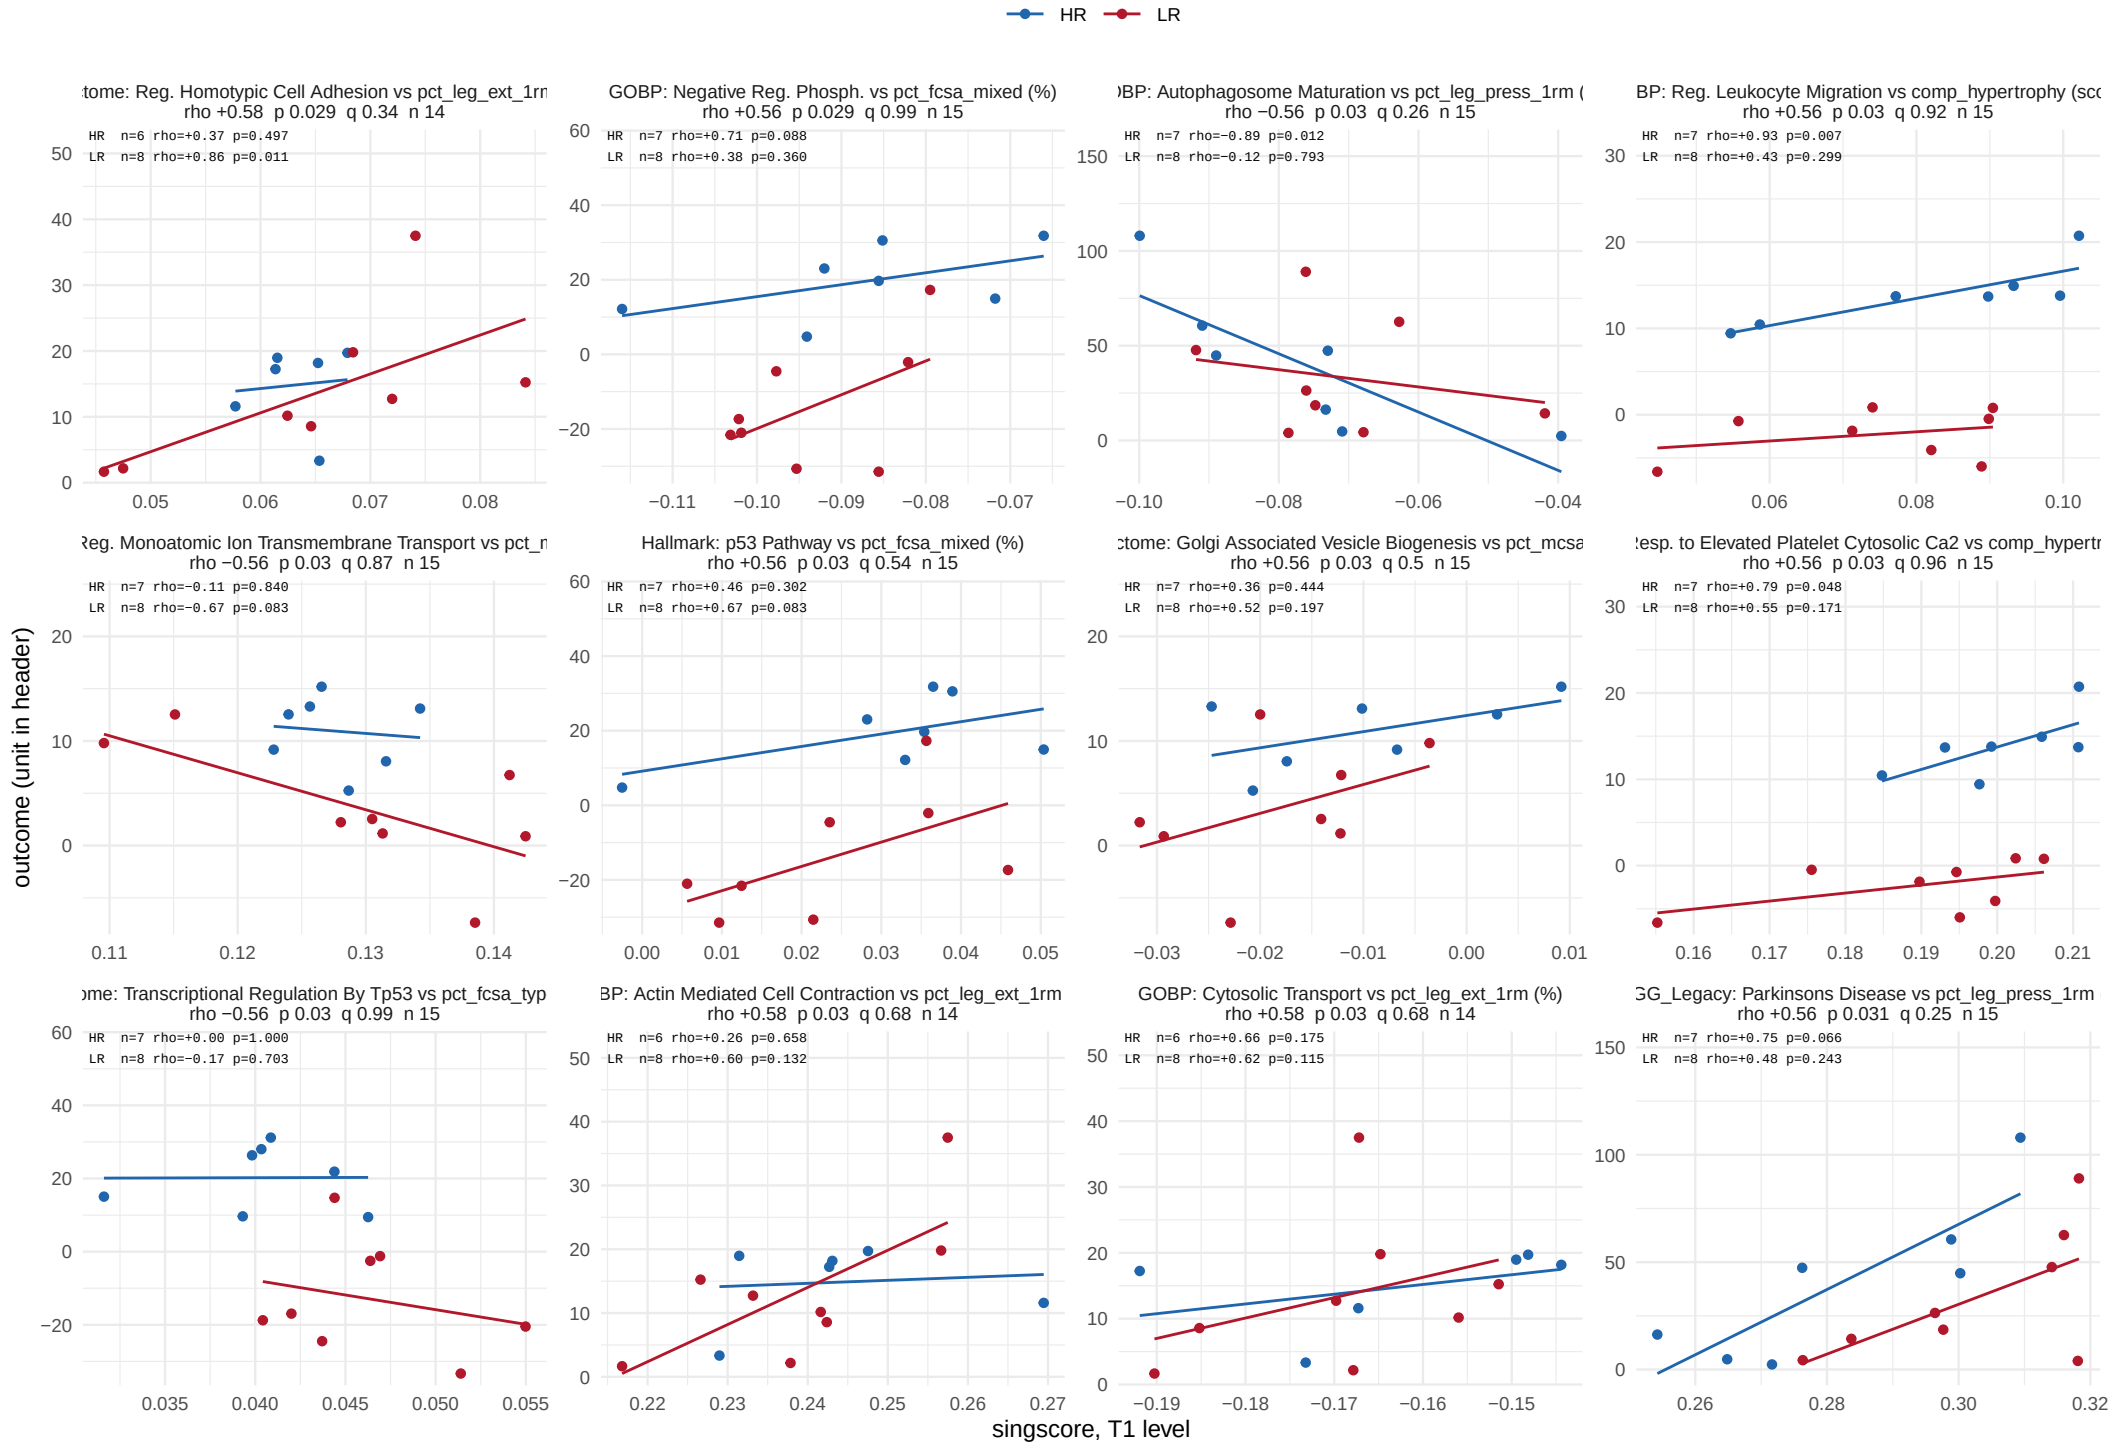


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, baseline window


626 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 31 of 53.

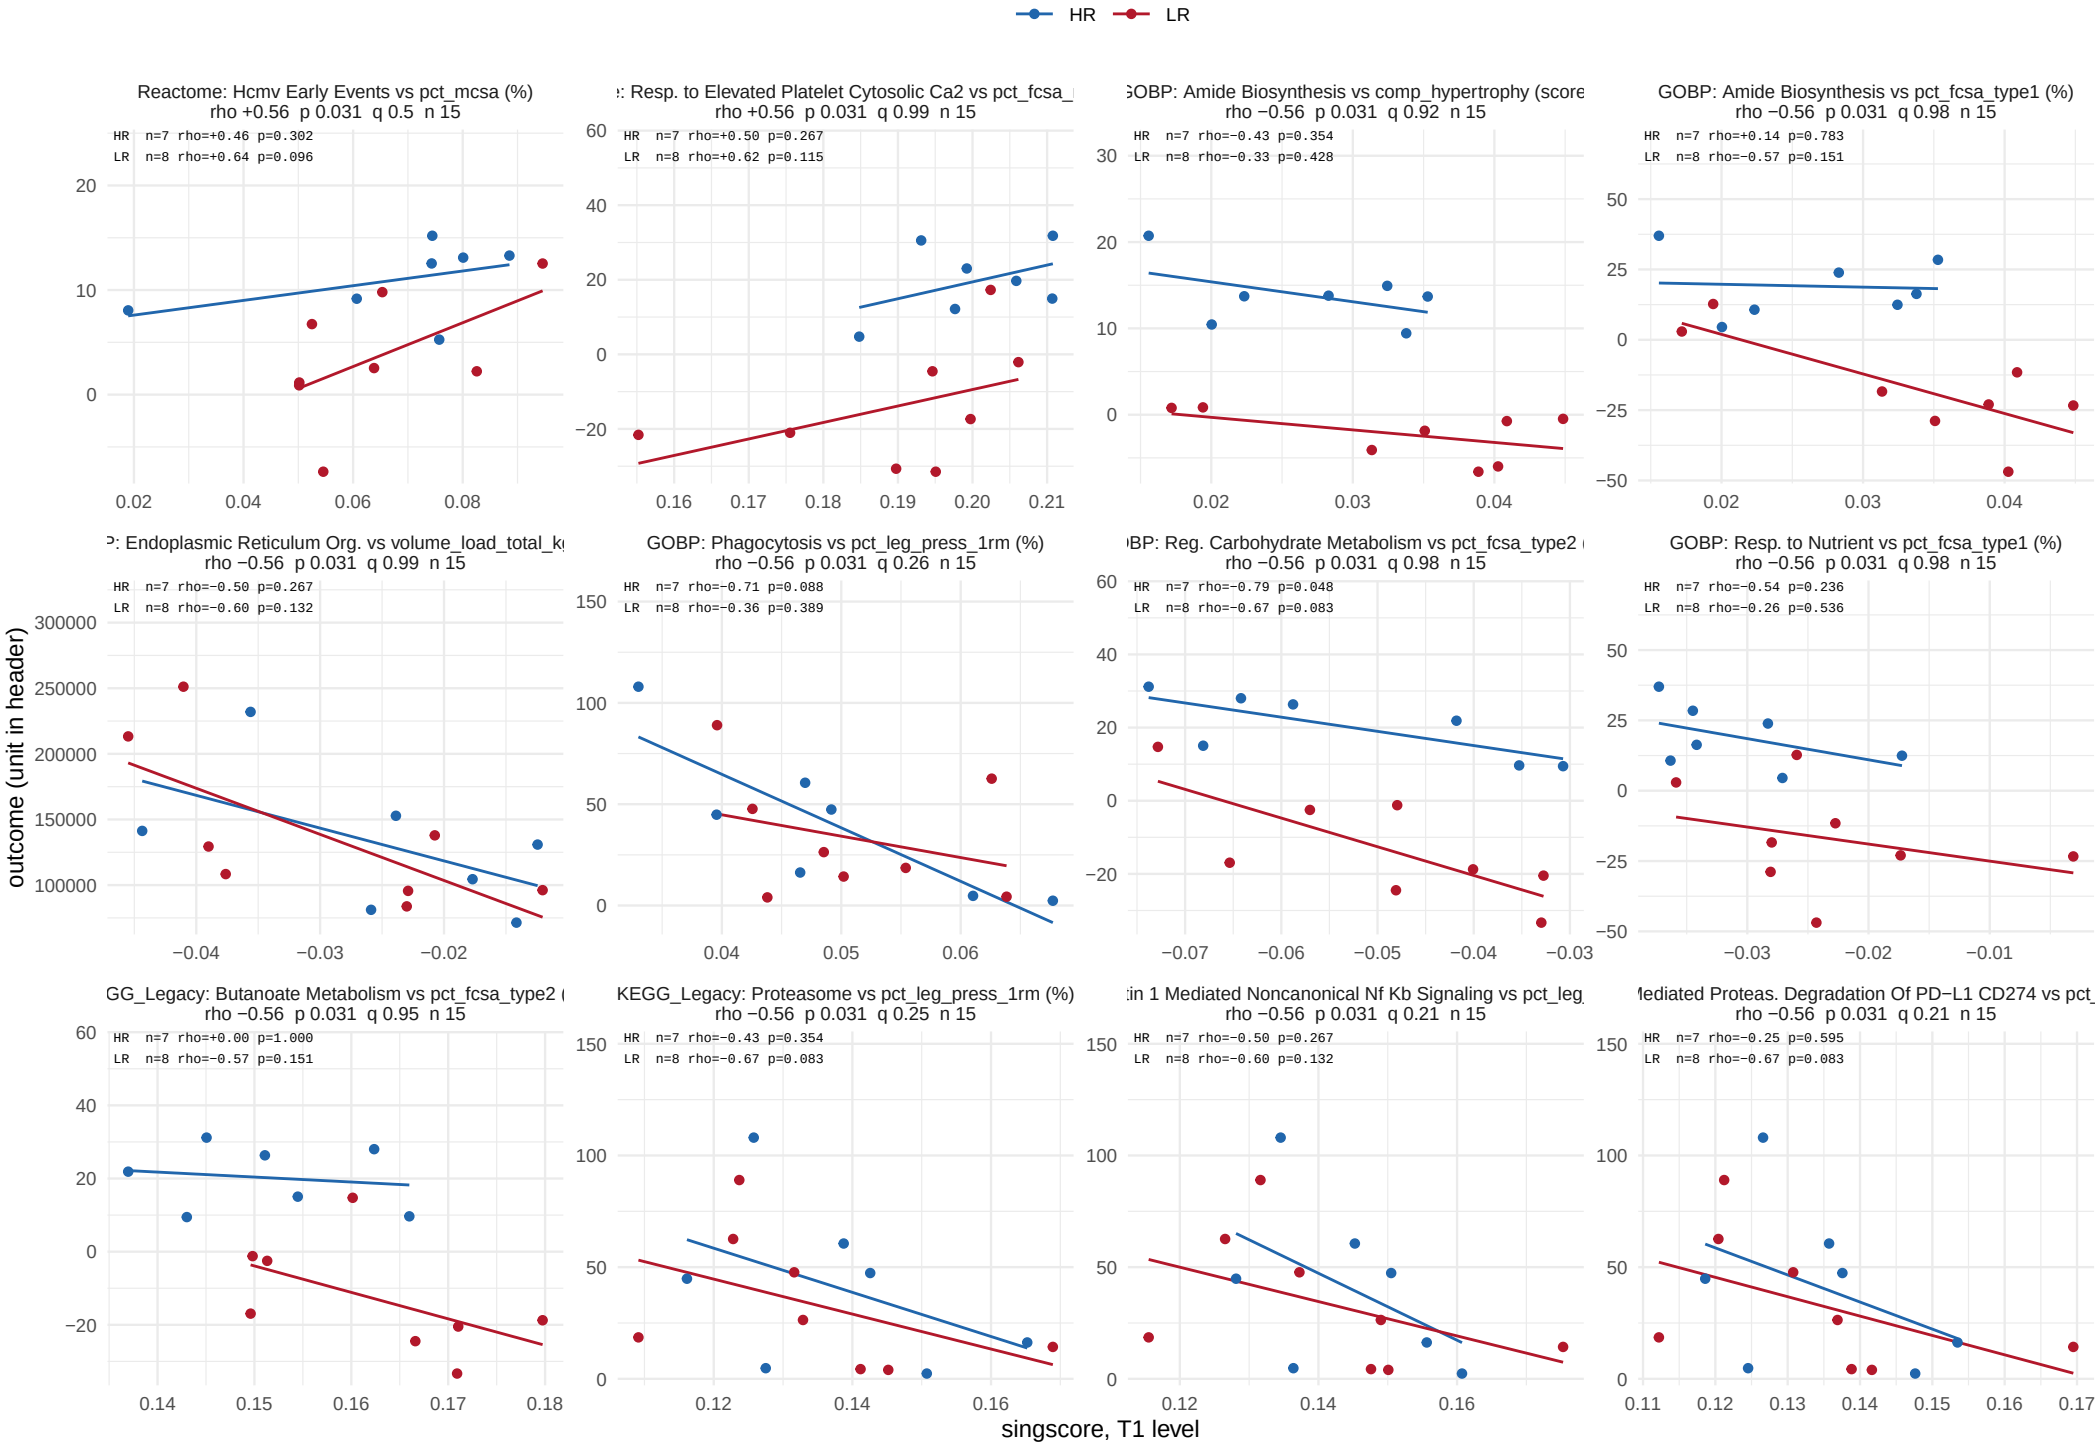


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, baseline window


626 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 32 of 53.

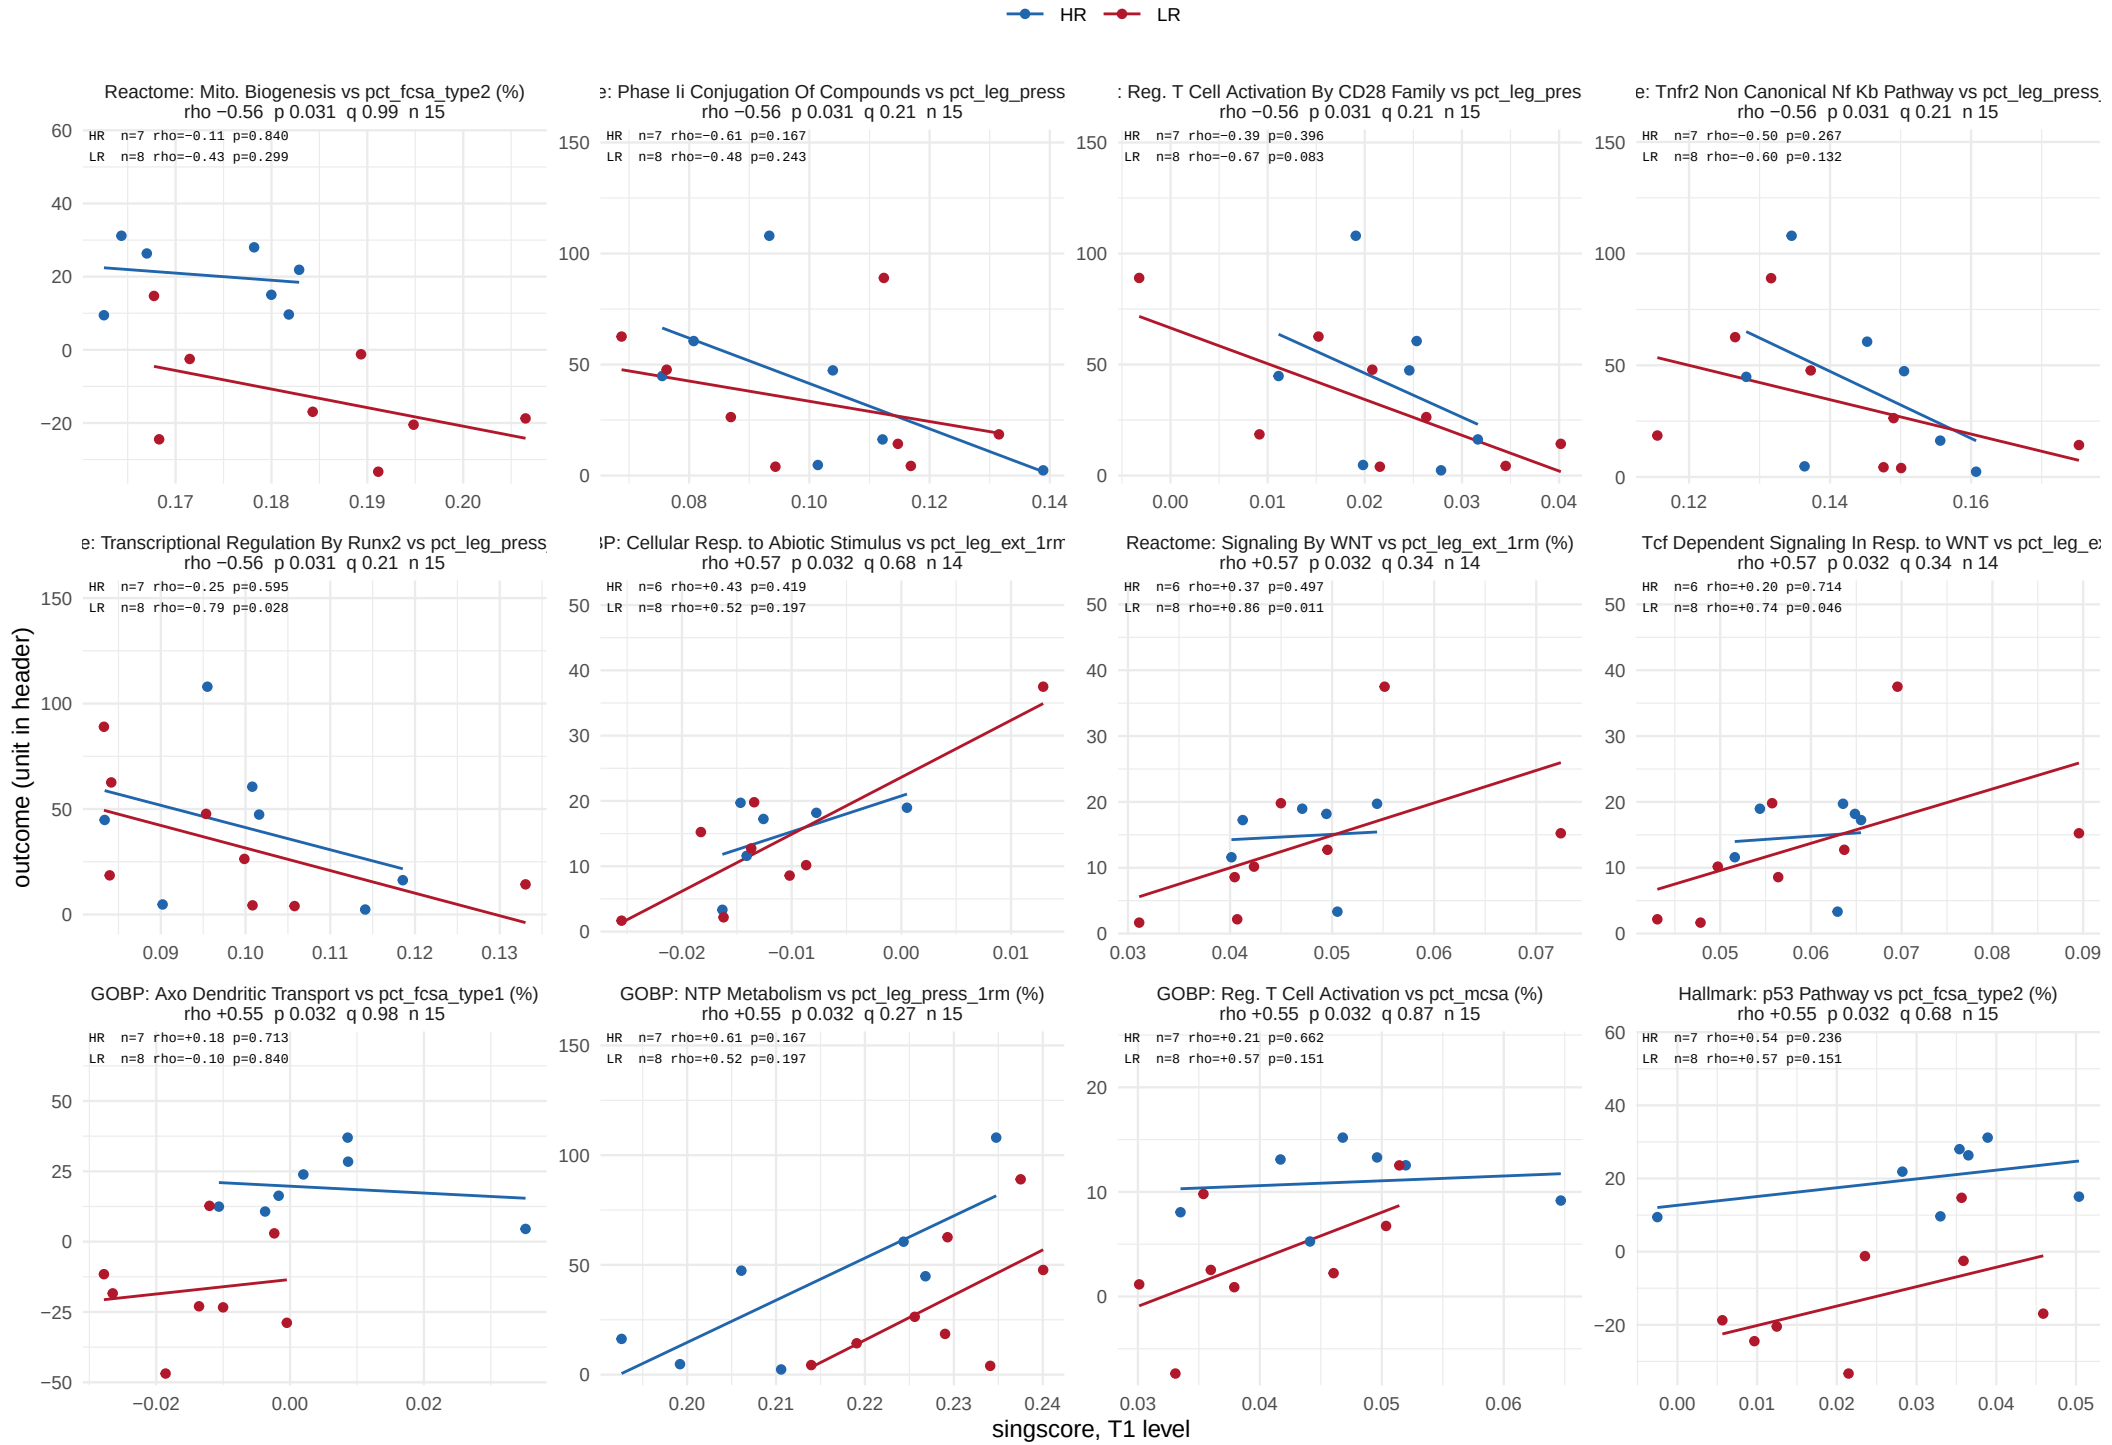


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, baseline window


626 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 33 of 53.

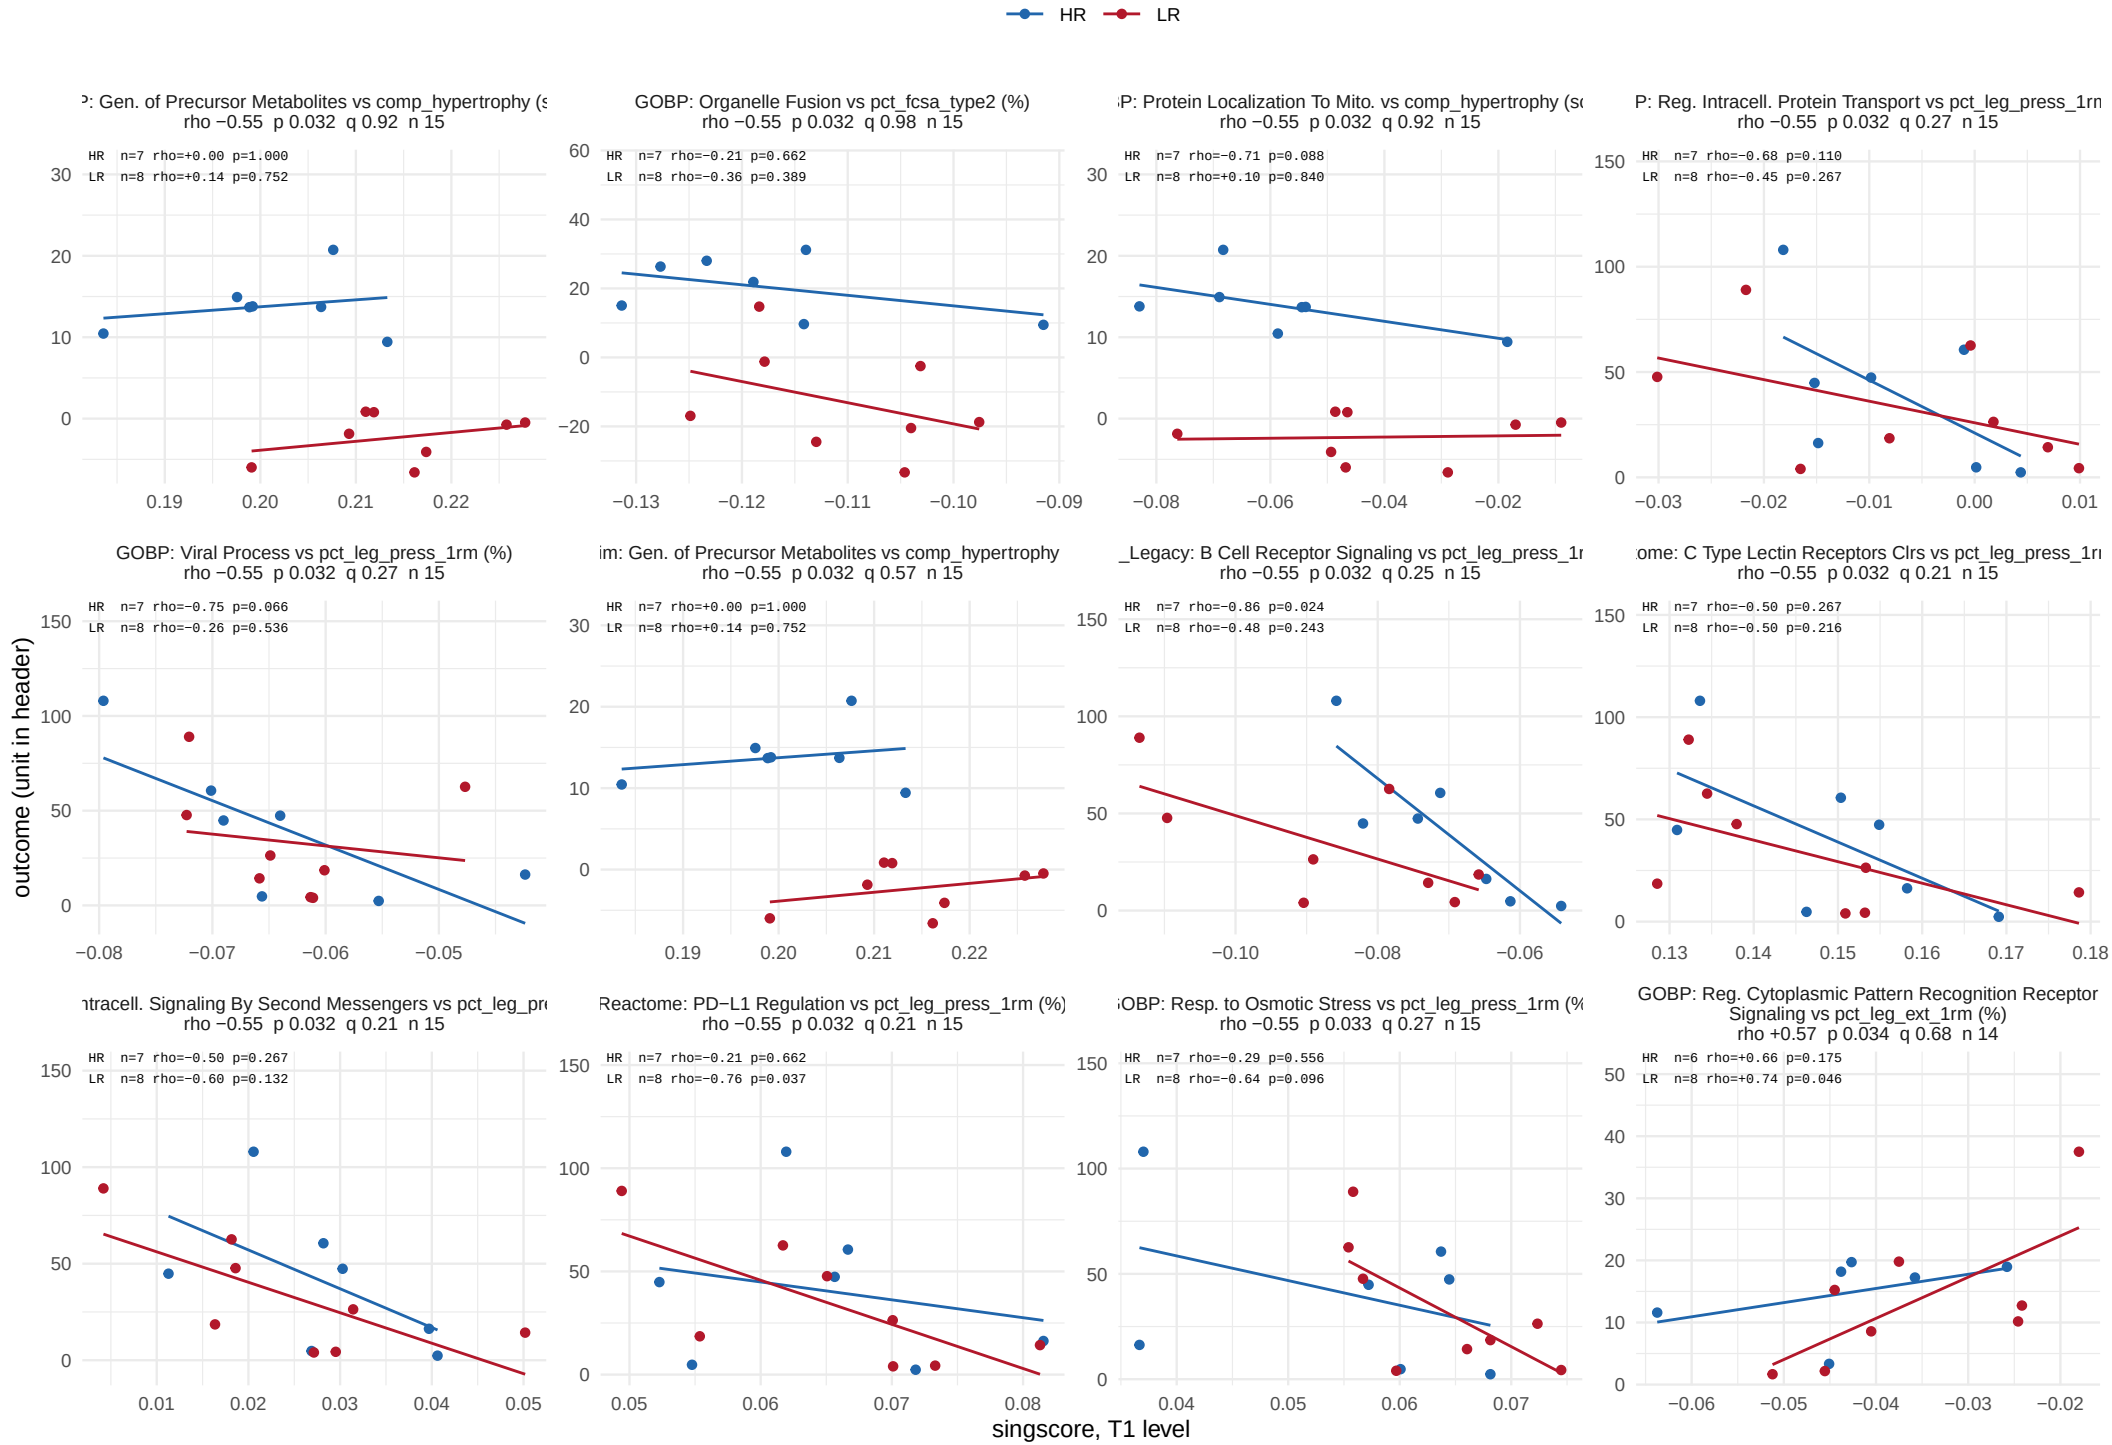


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, baseline window


626 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 34 of 53.

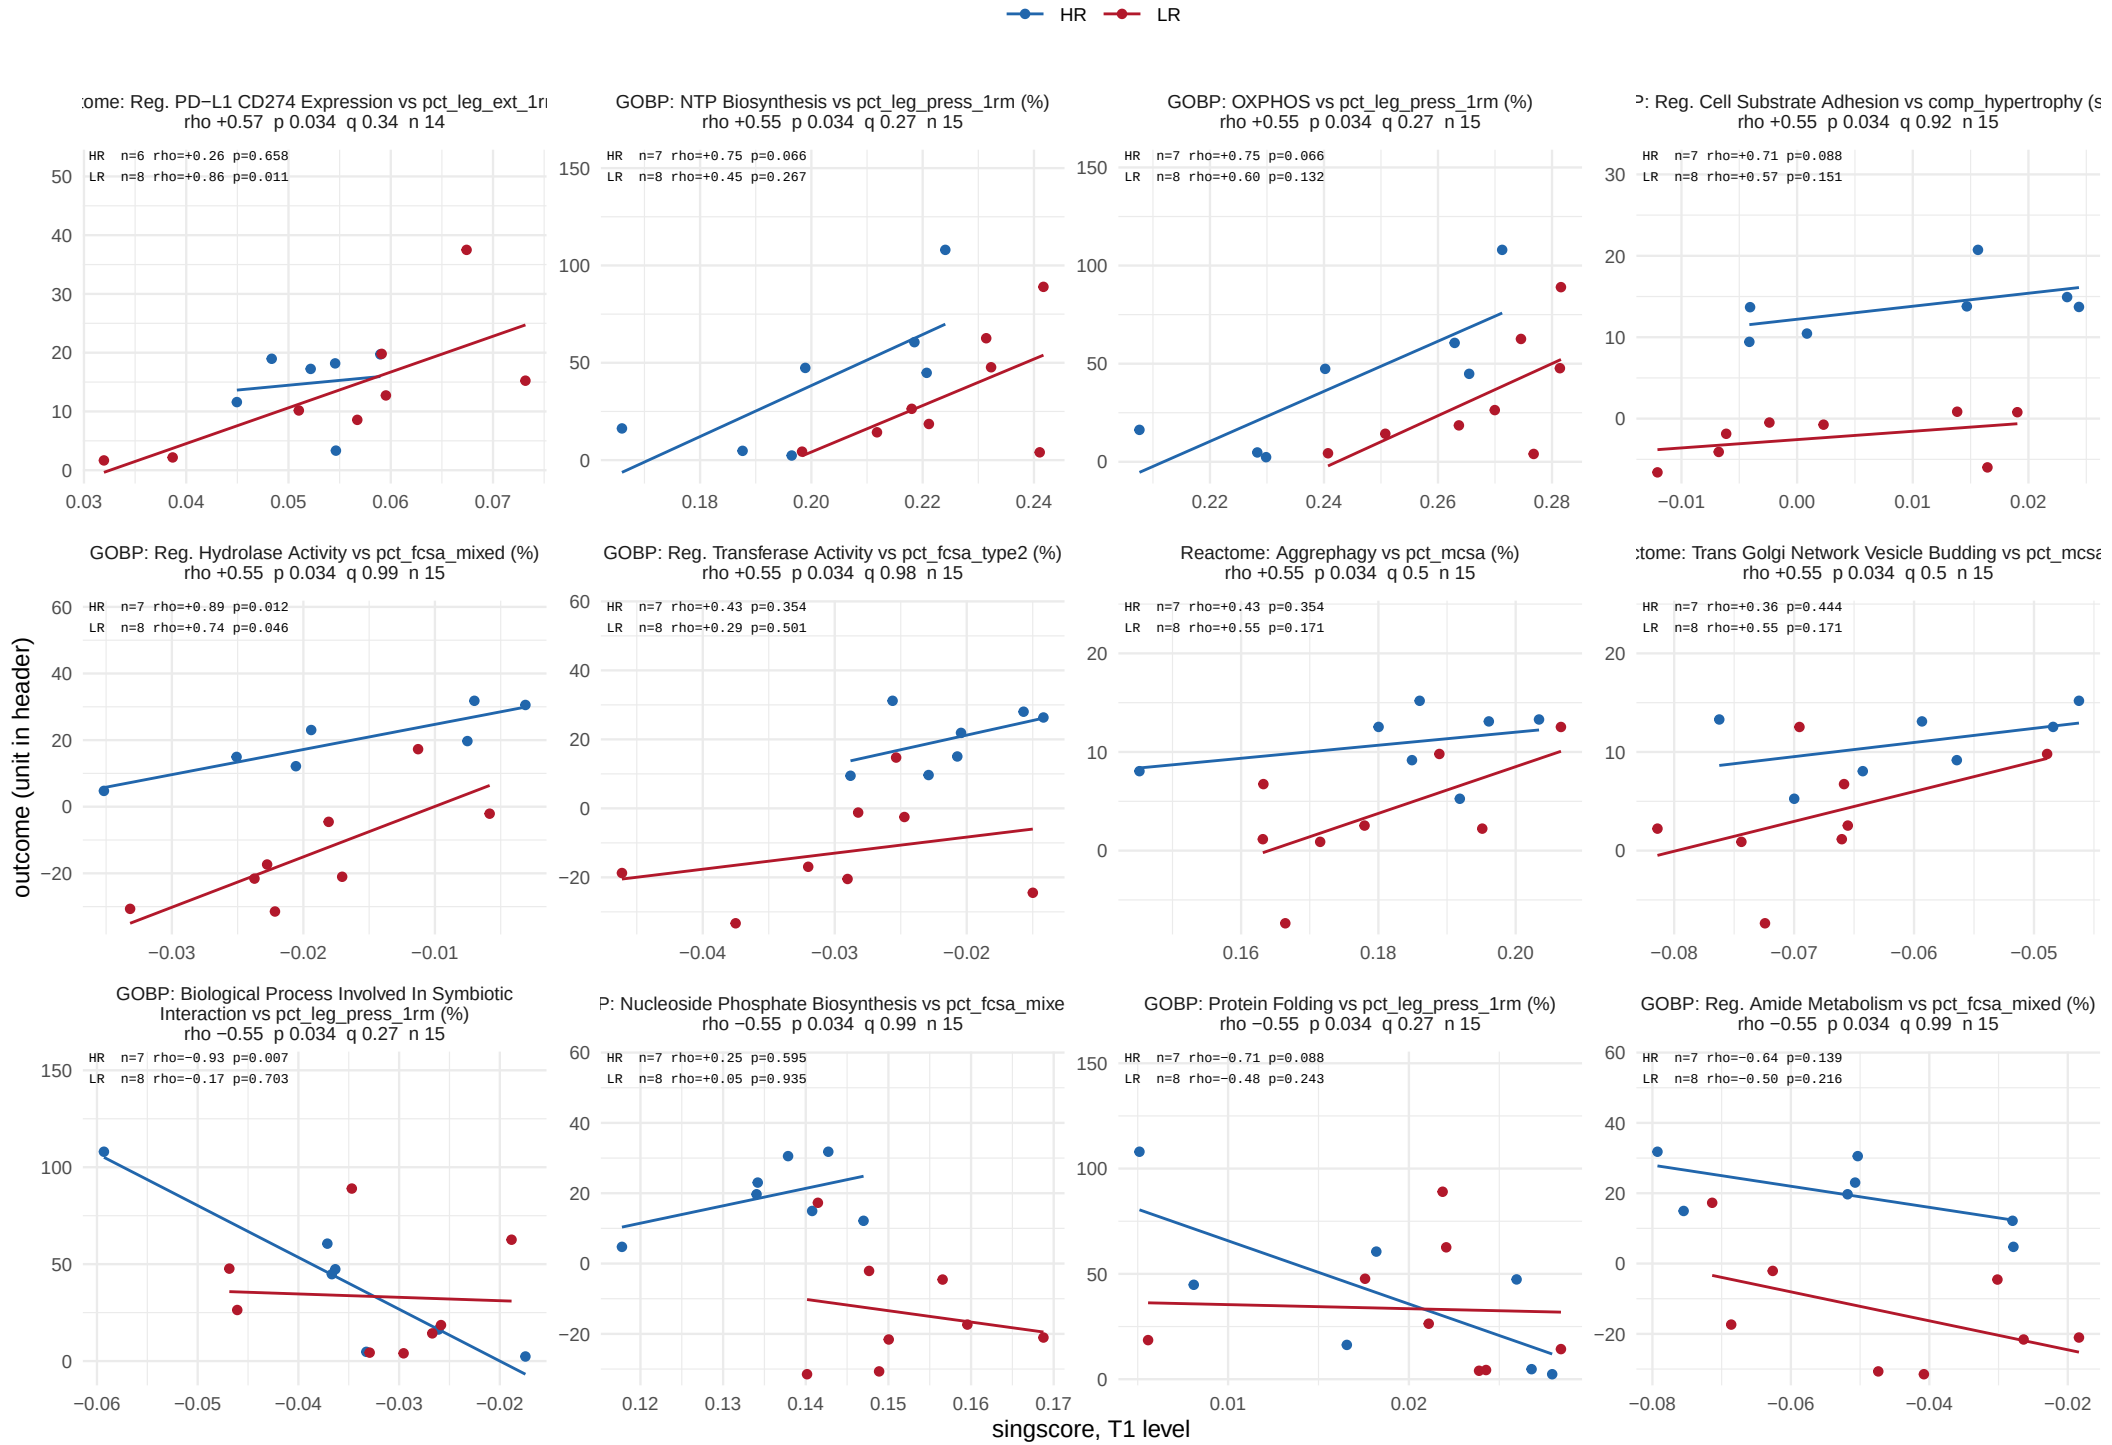


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, baseline window


626 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 35 of 53.

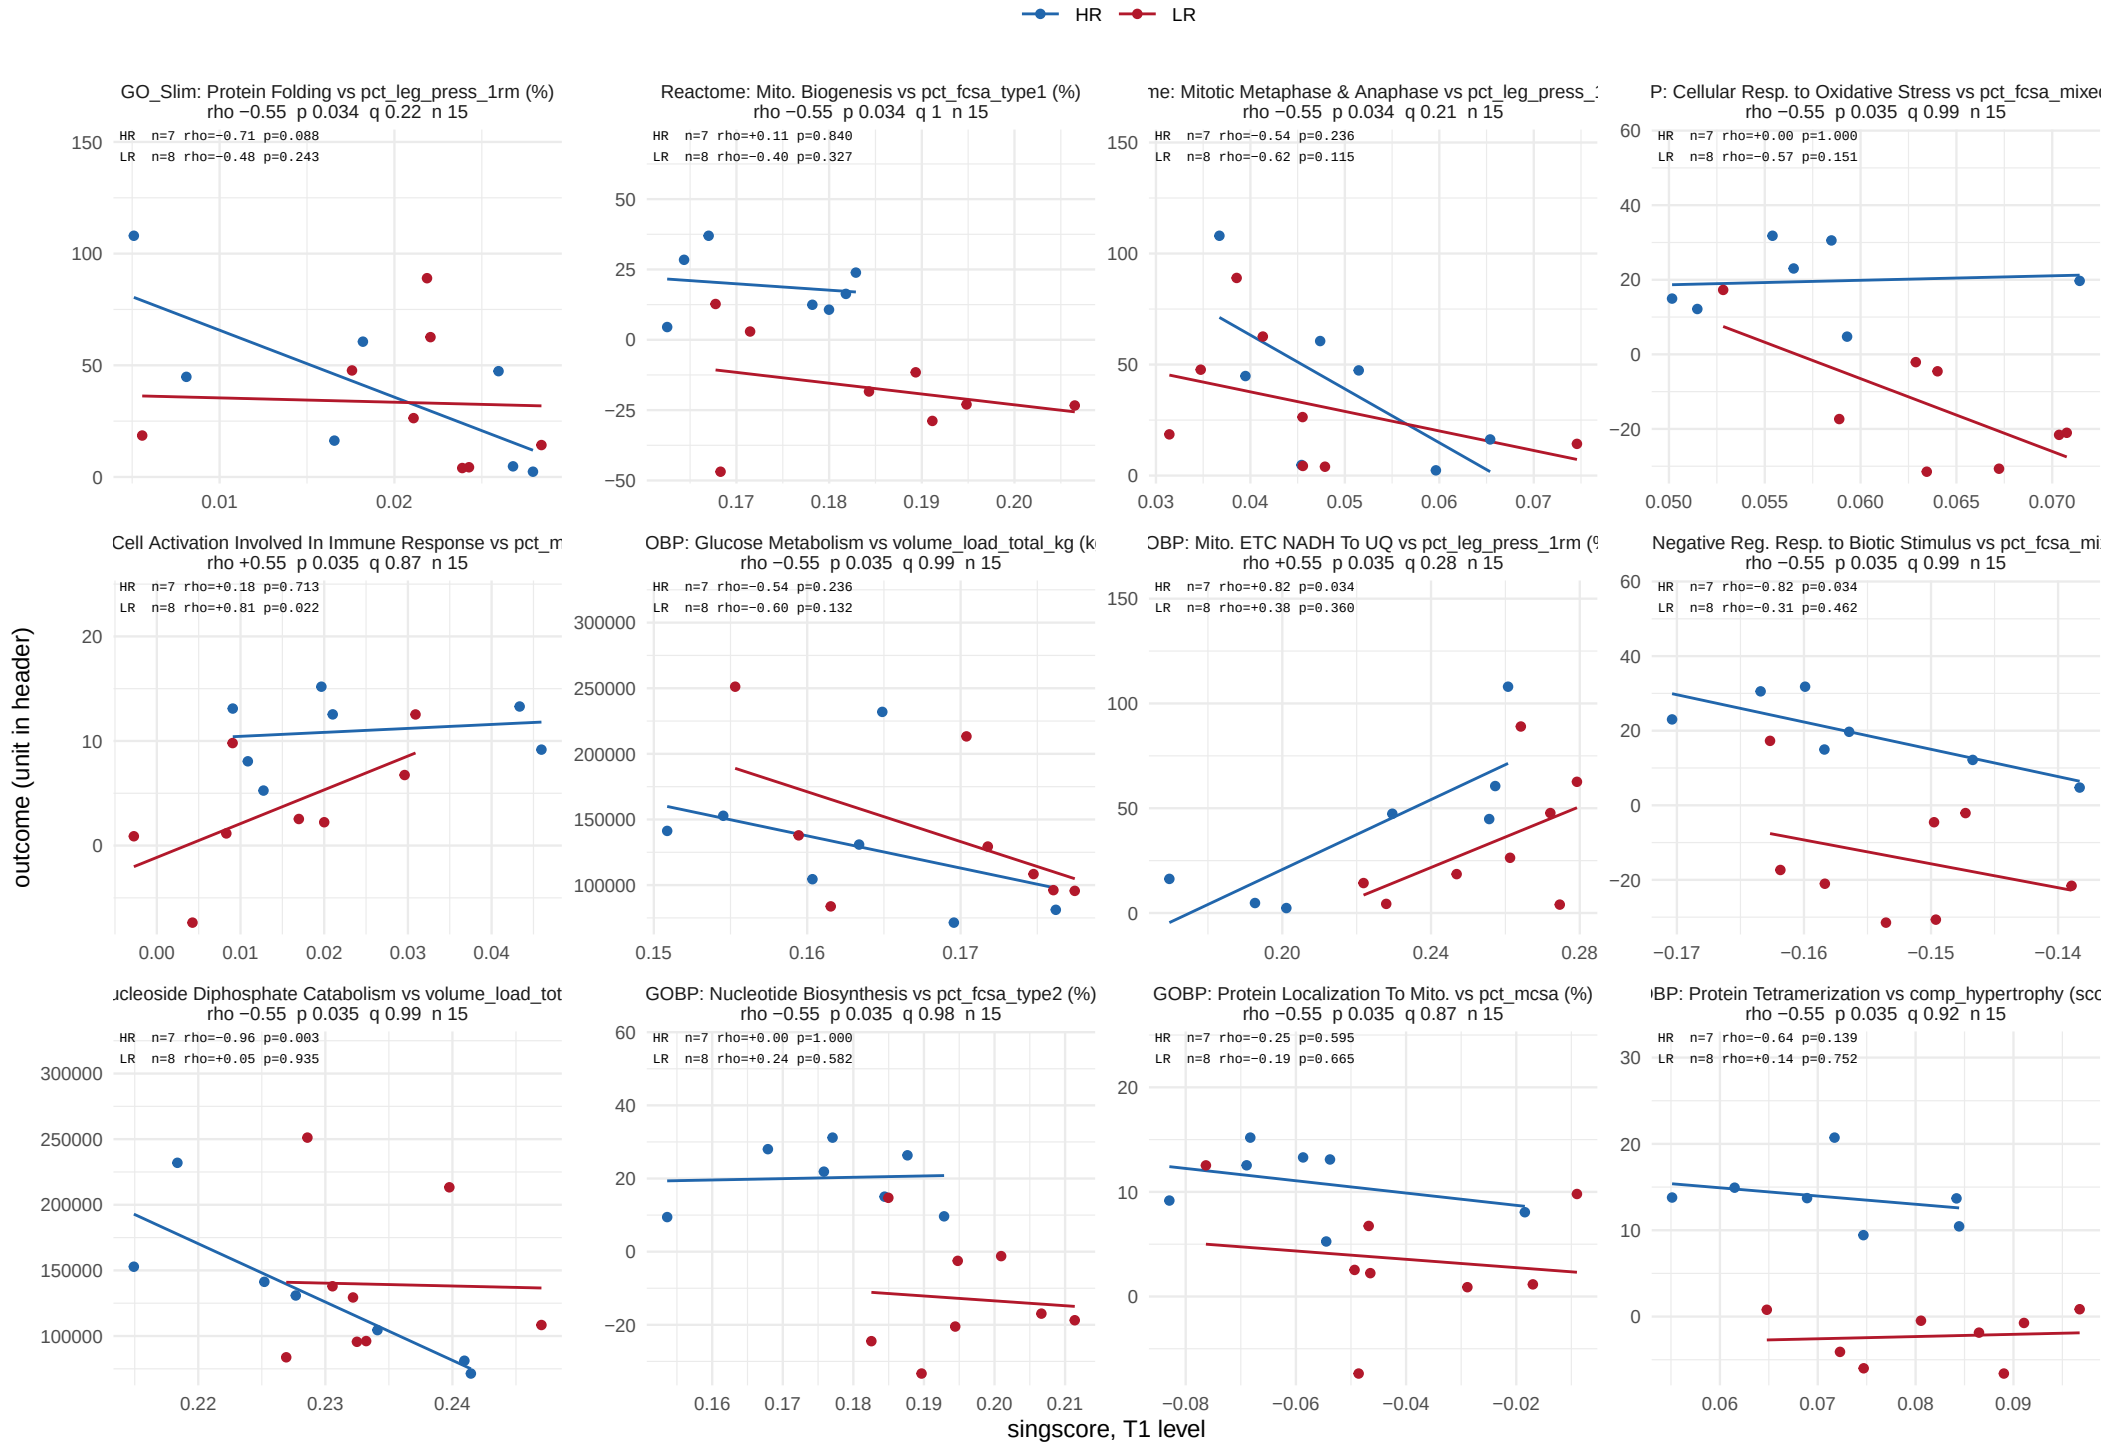


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, baseline window


626 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 36 of 53.

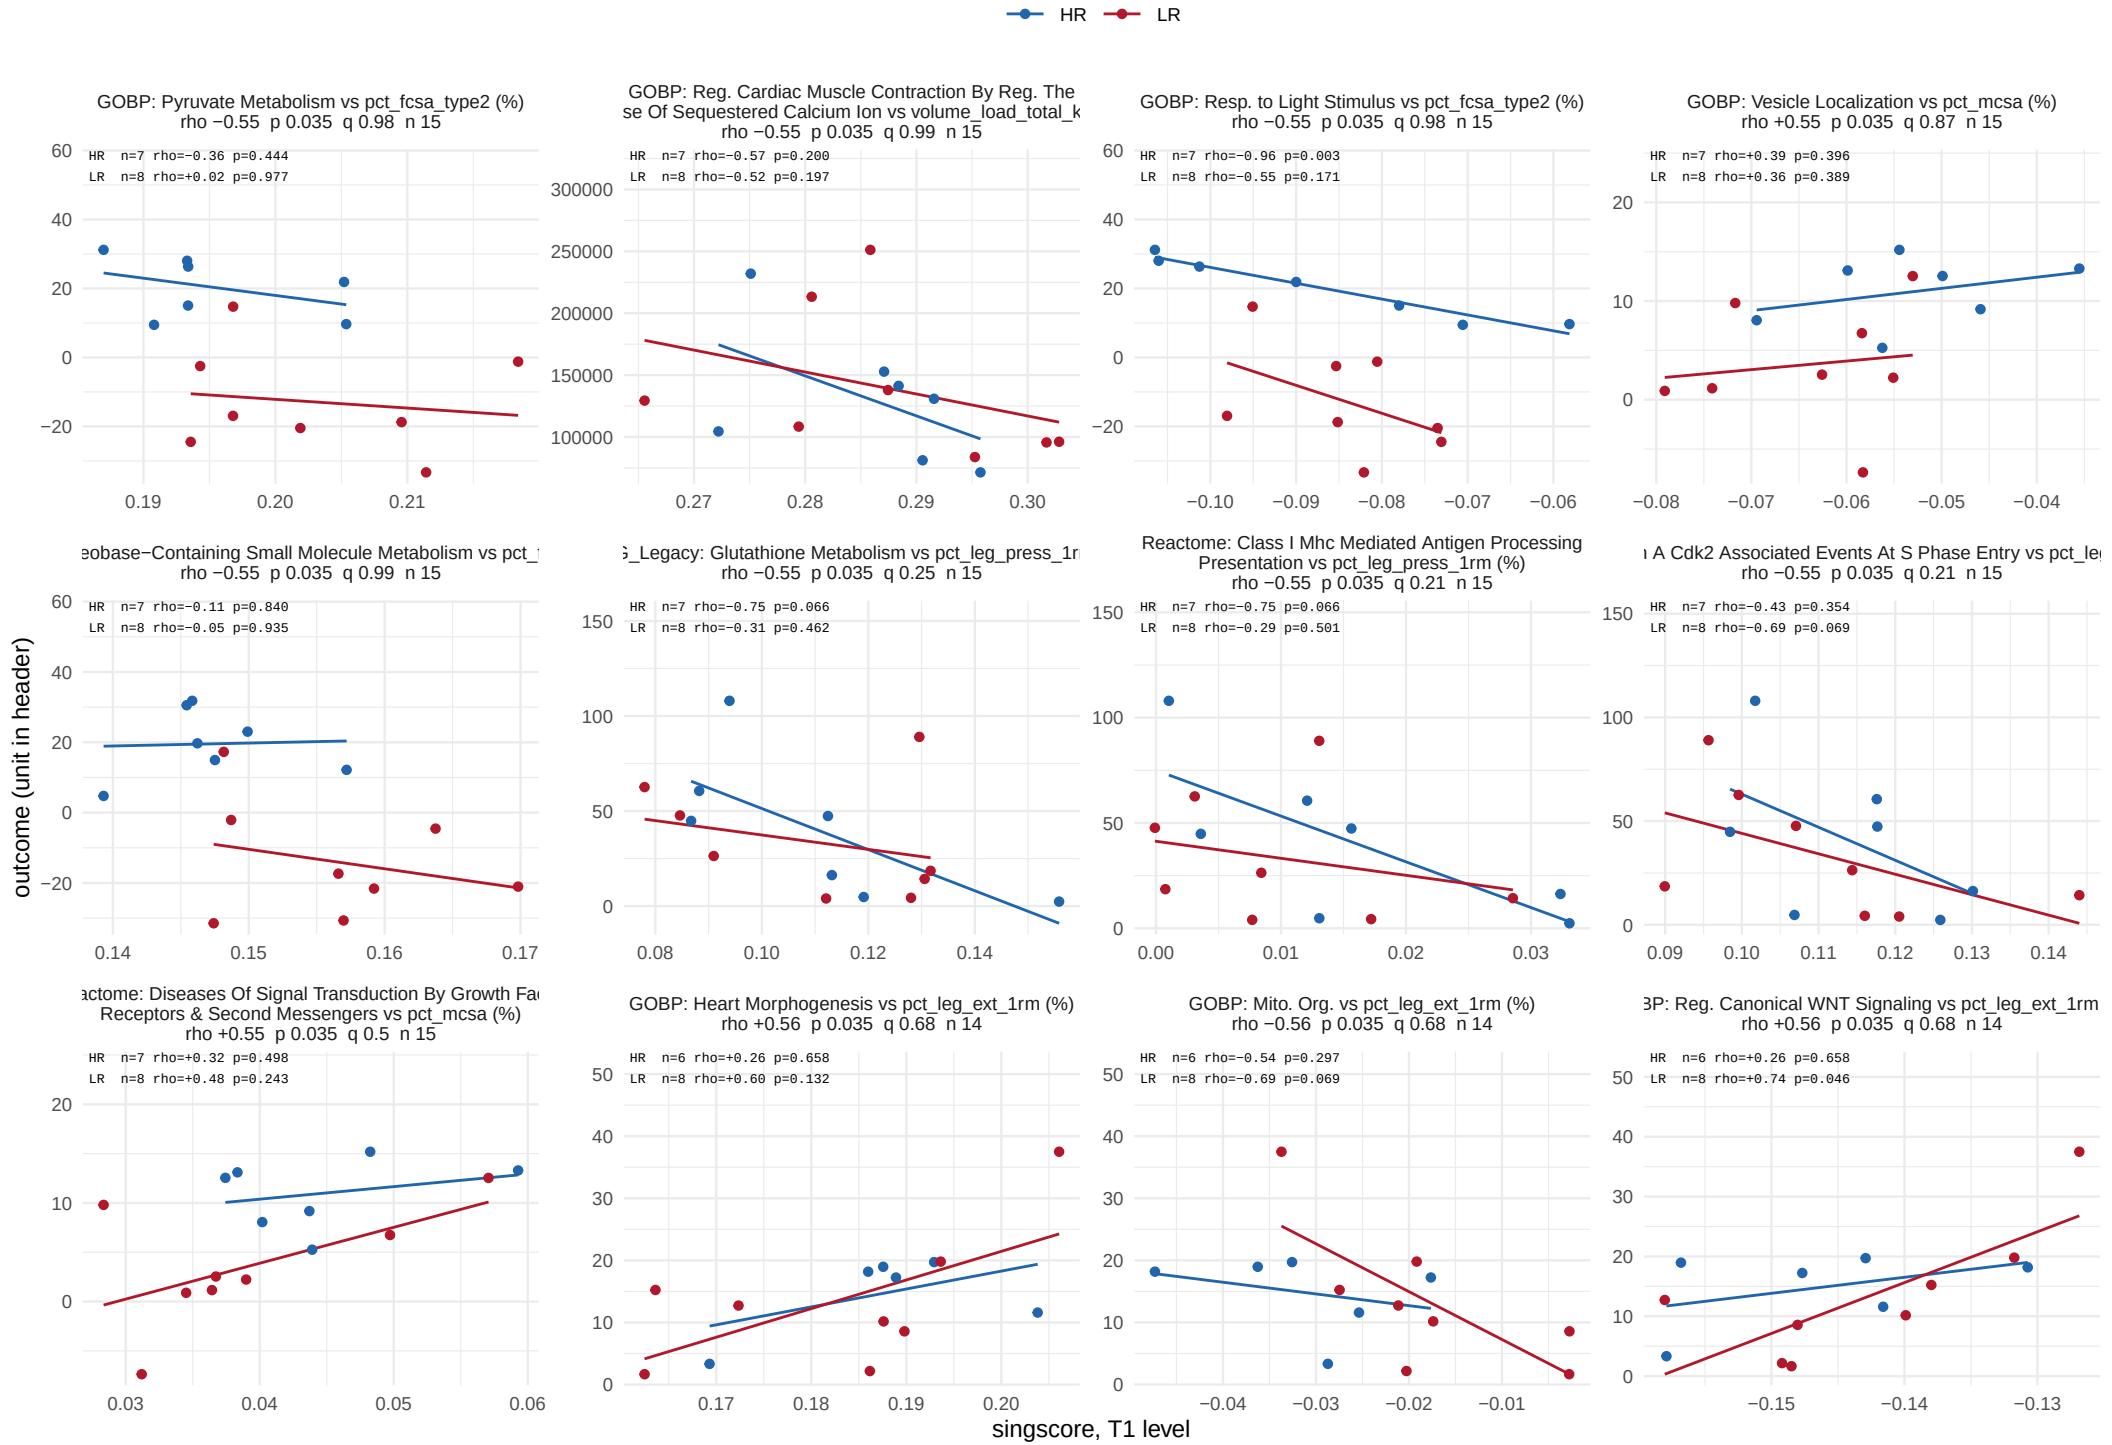


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, baseline window


626 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 37 of 53.

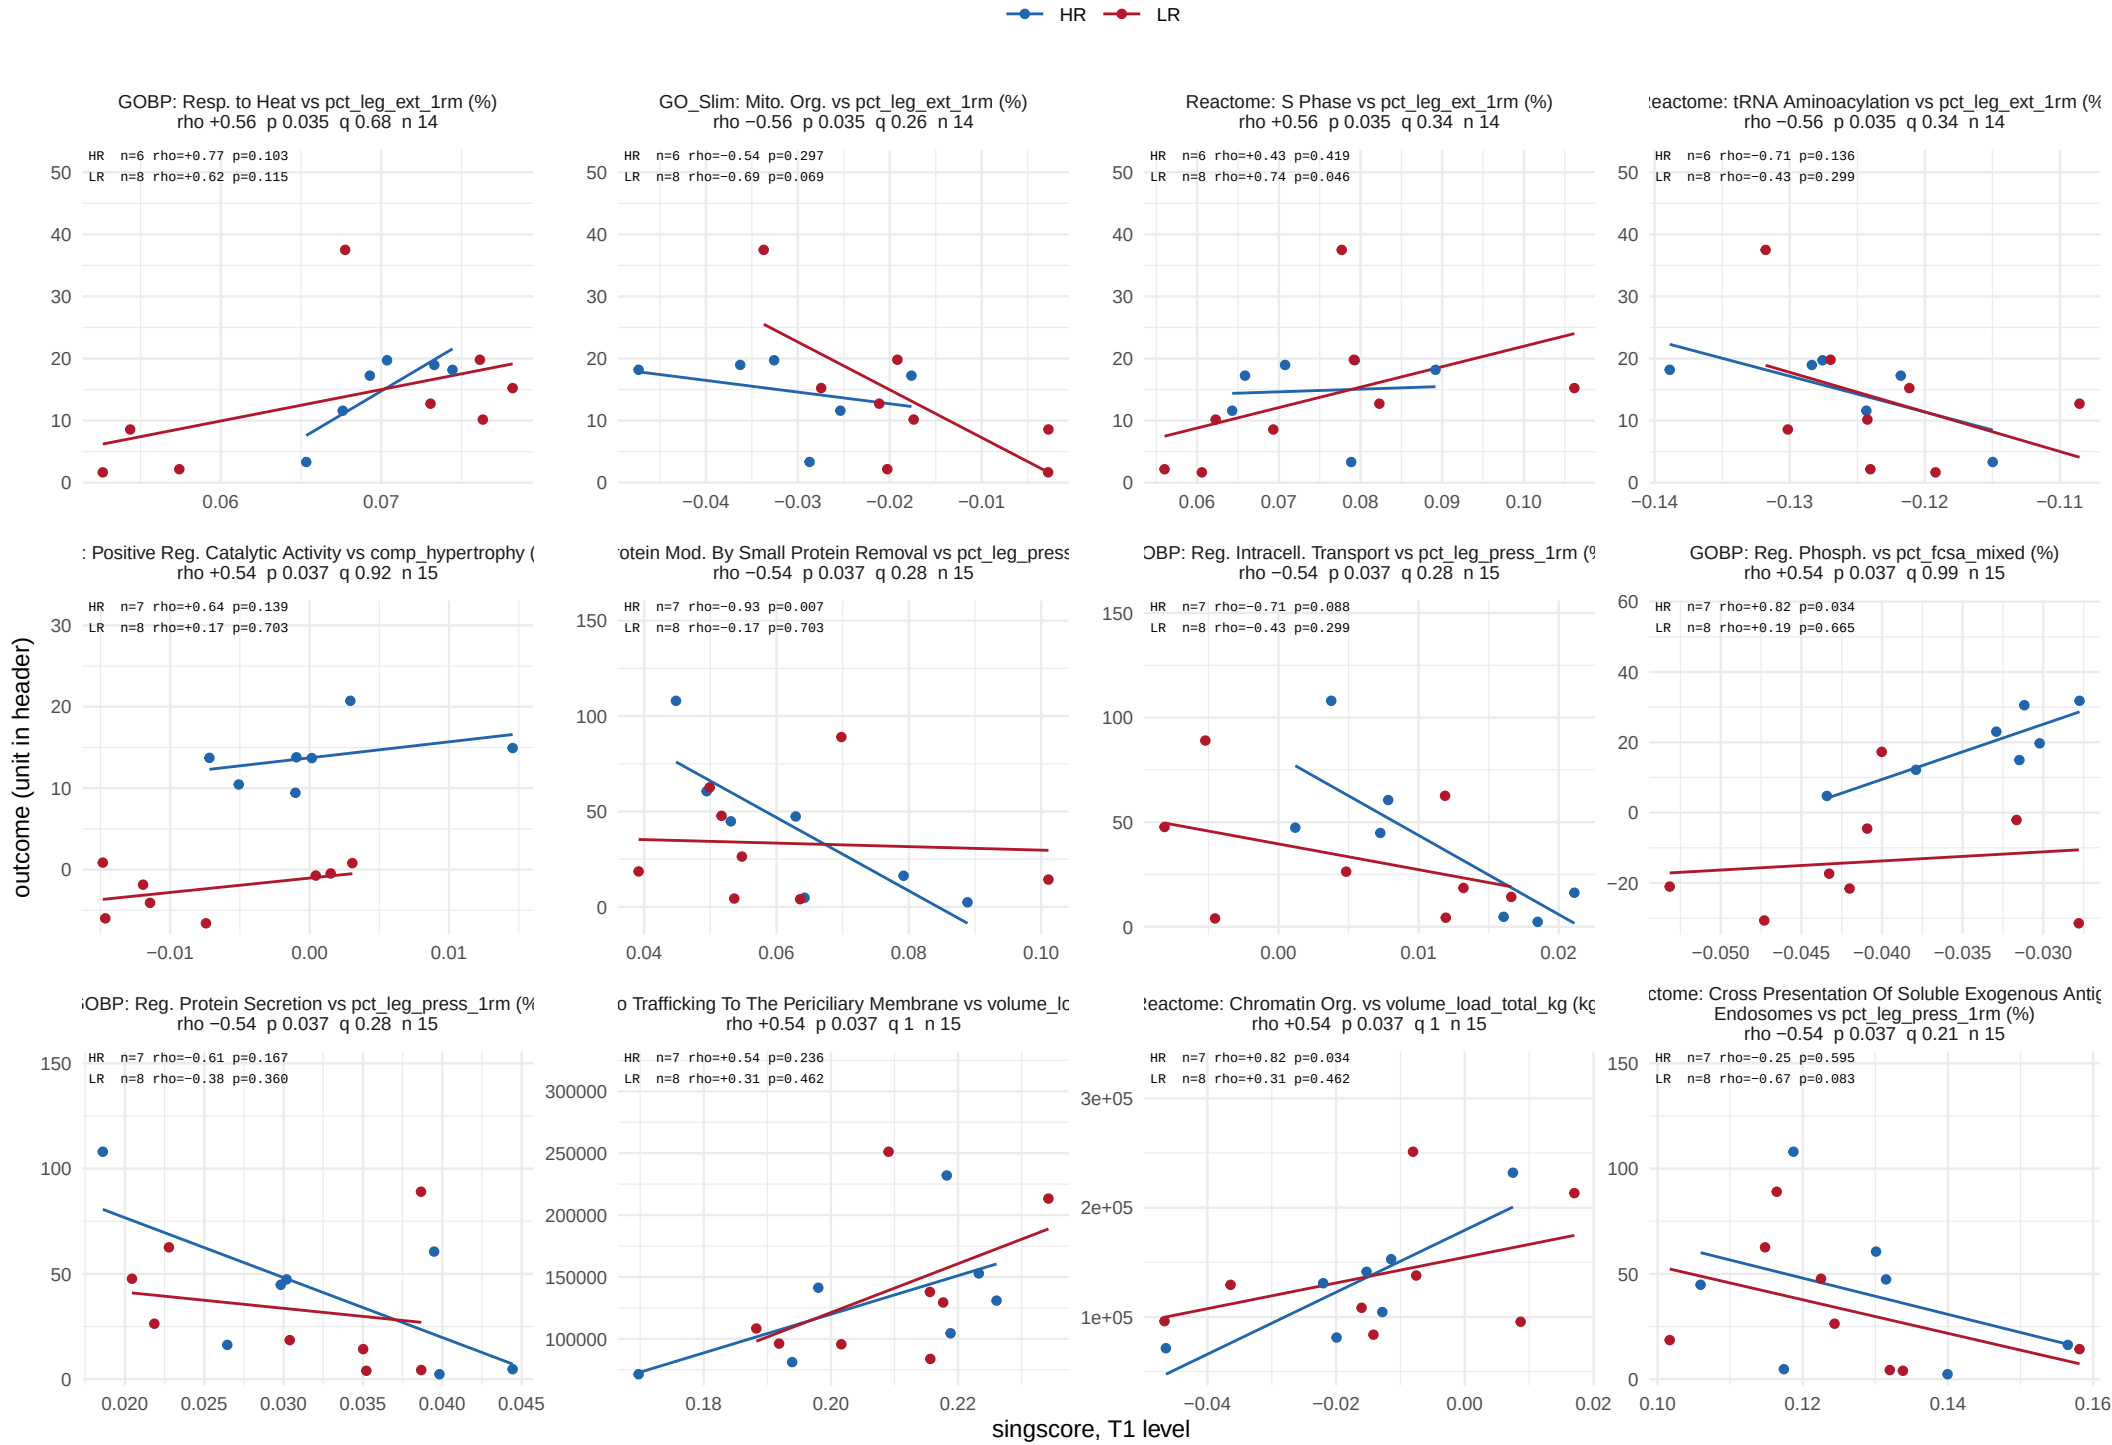


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, baseline window


626 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 38 of 53.

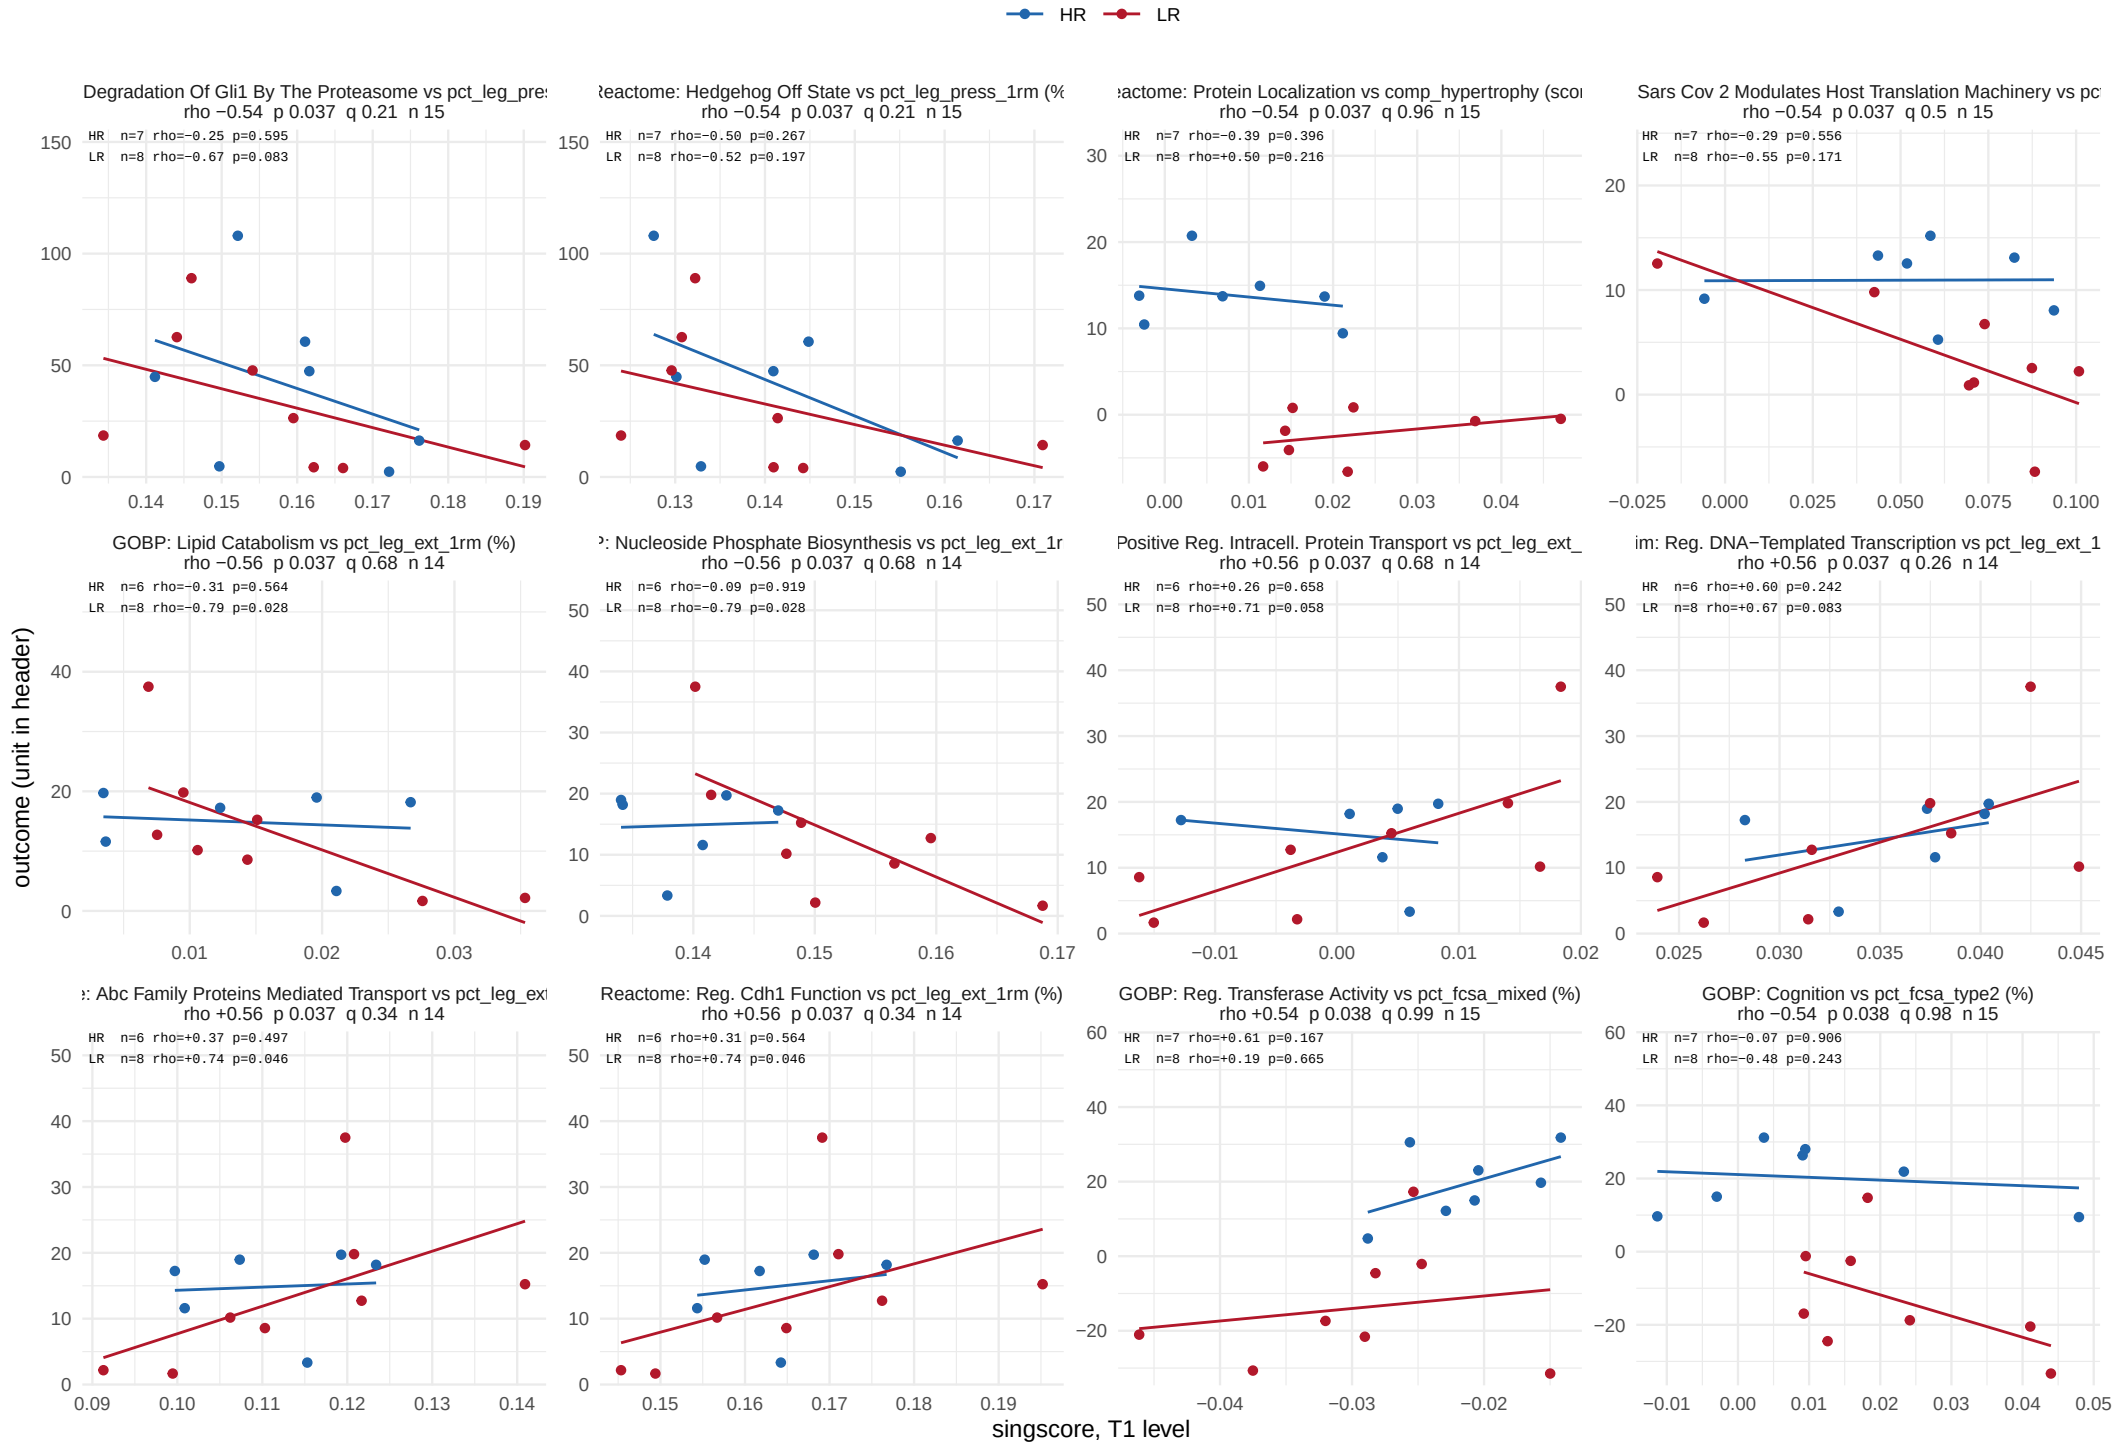


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, baseline window


626 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 39 of 53.

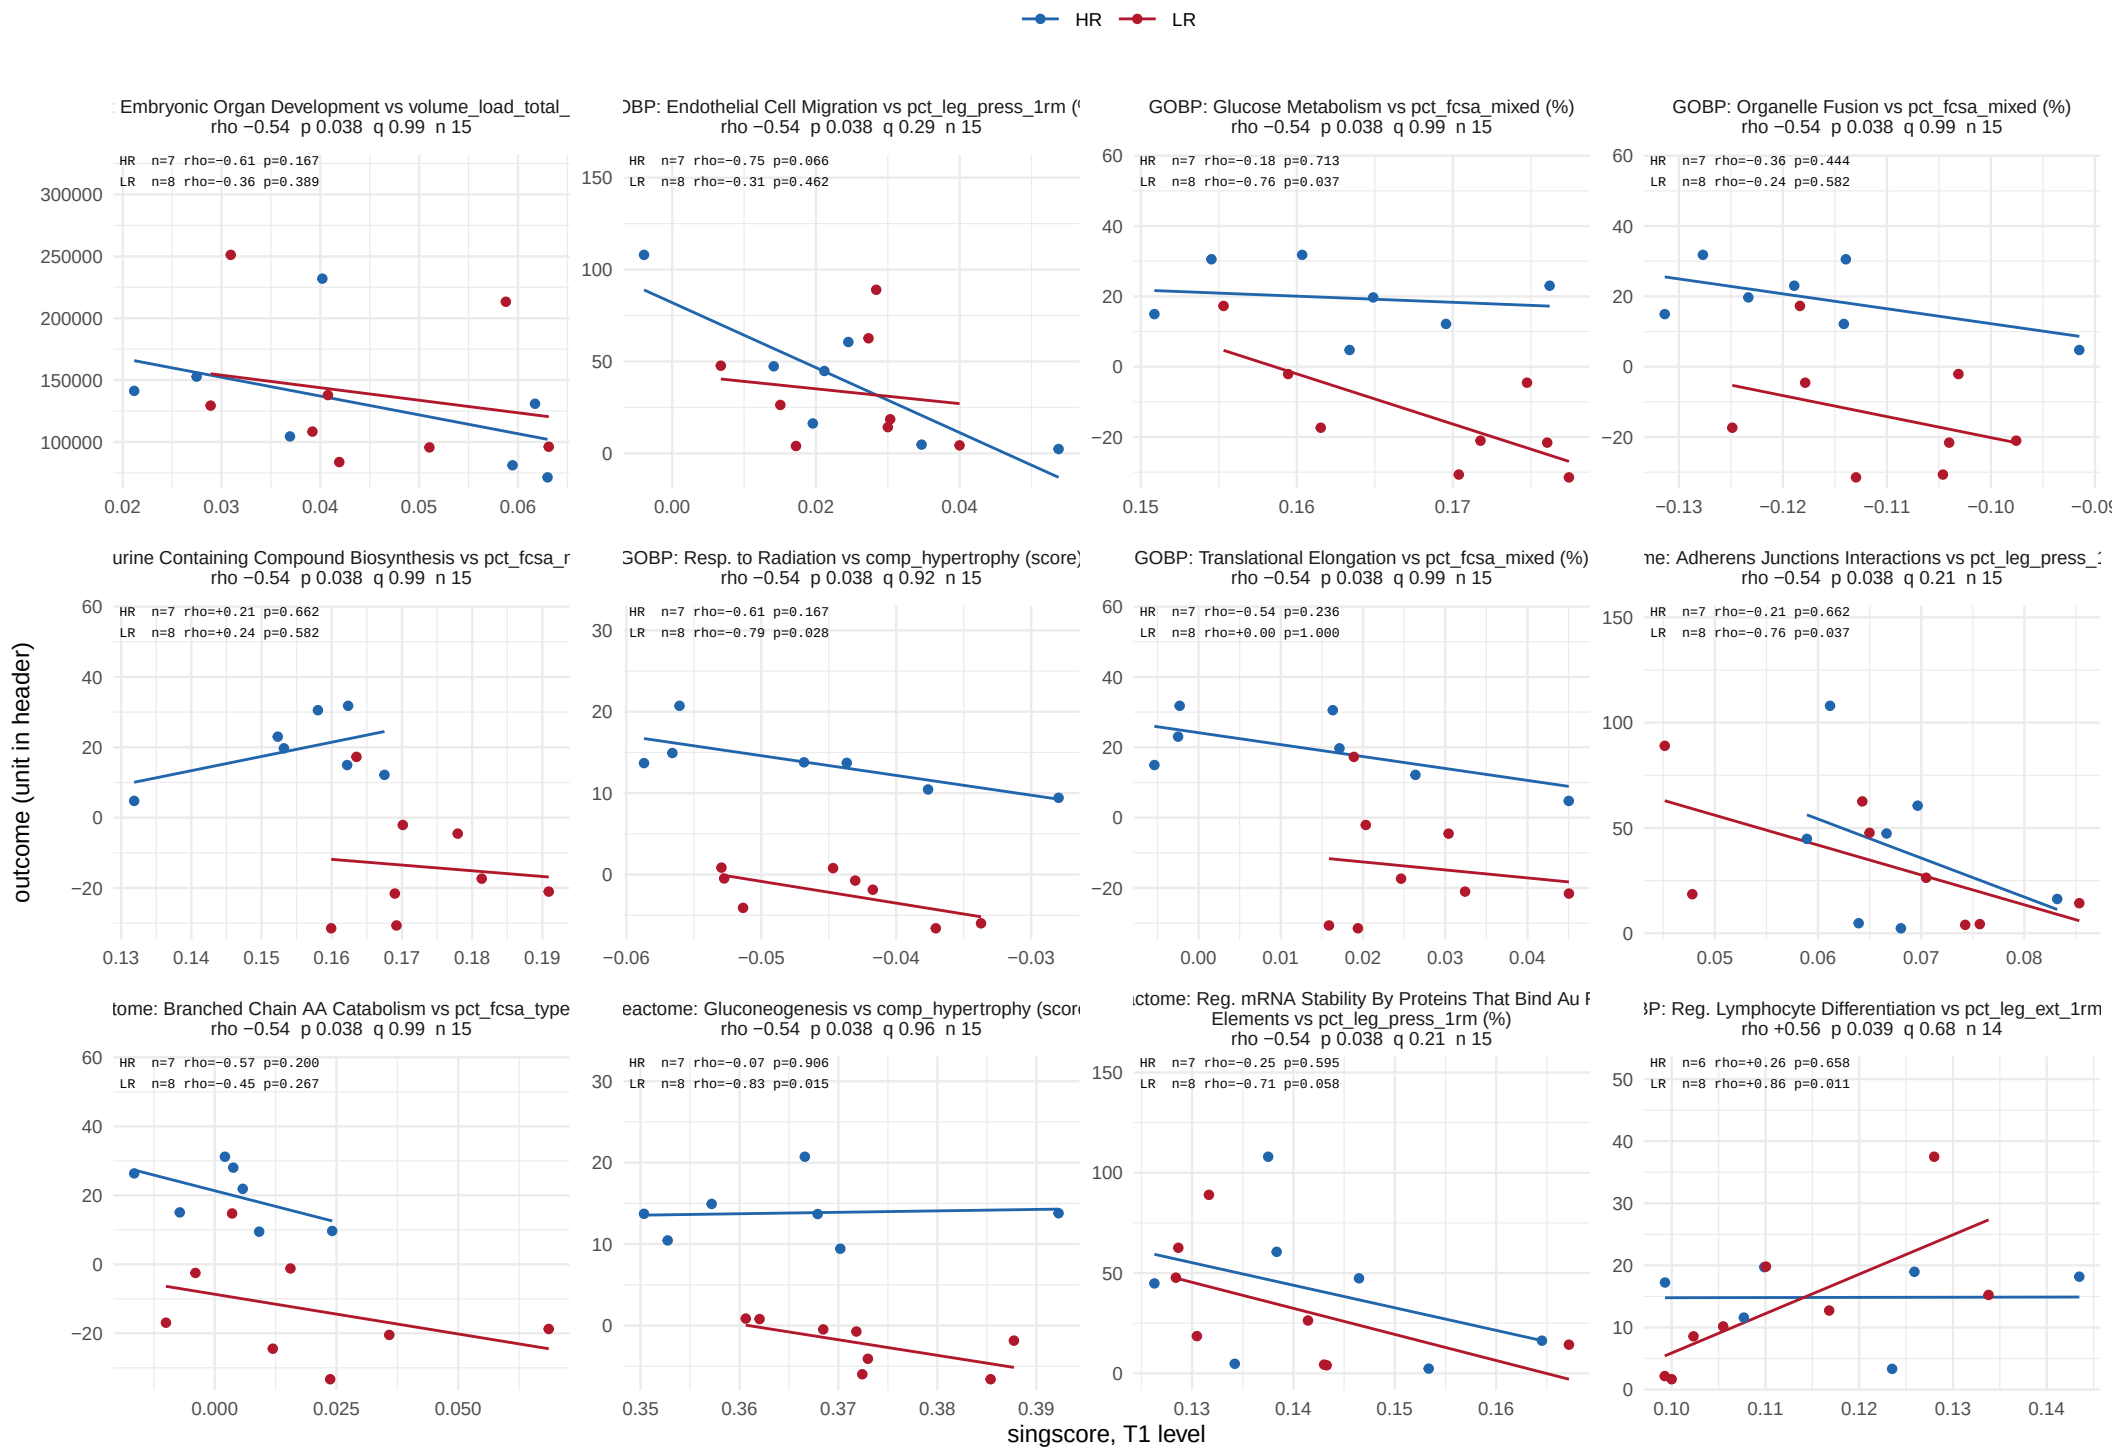


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, baseline window


626 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 40 of 53.

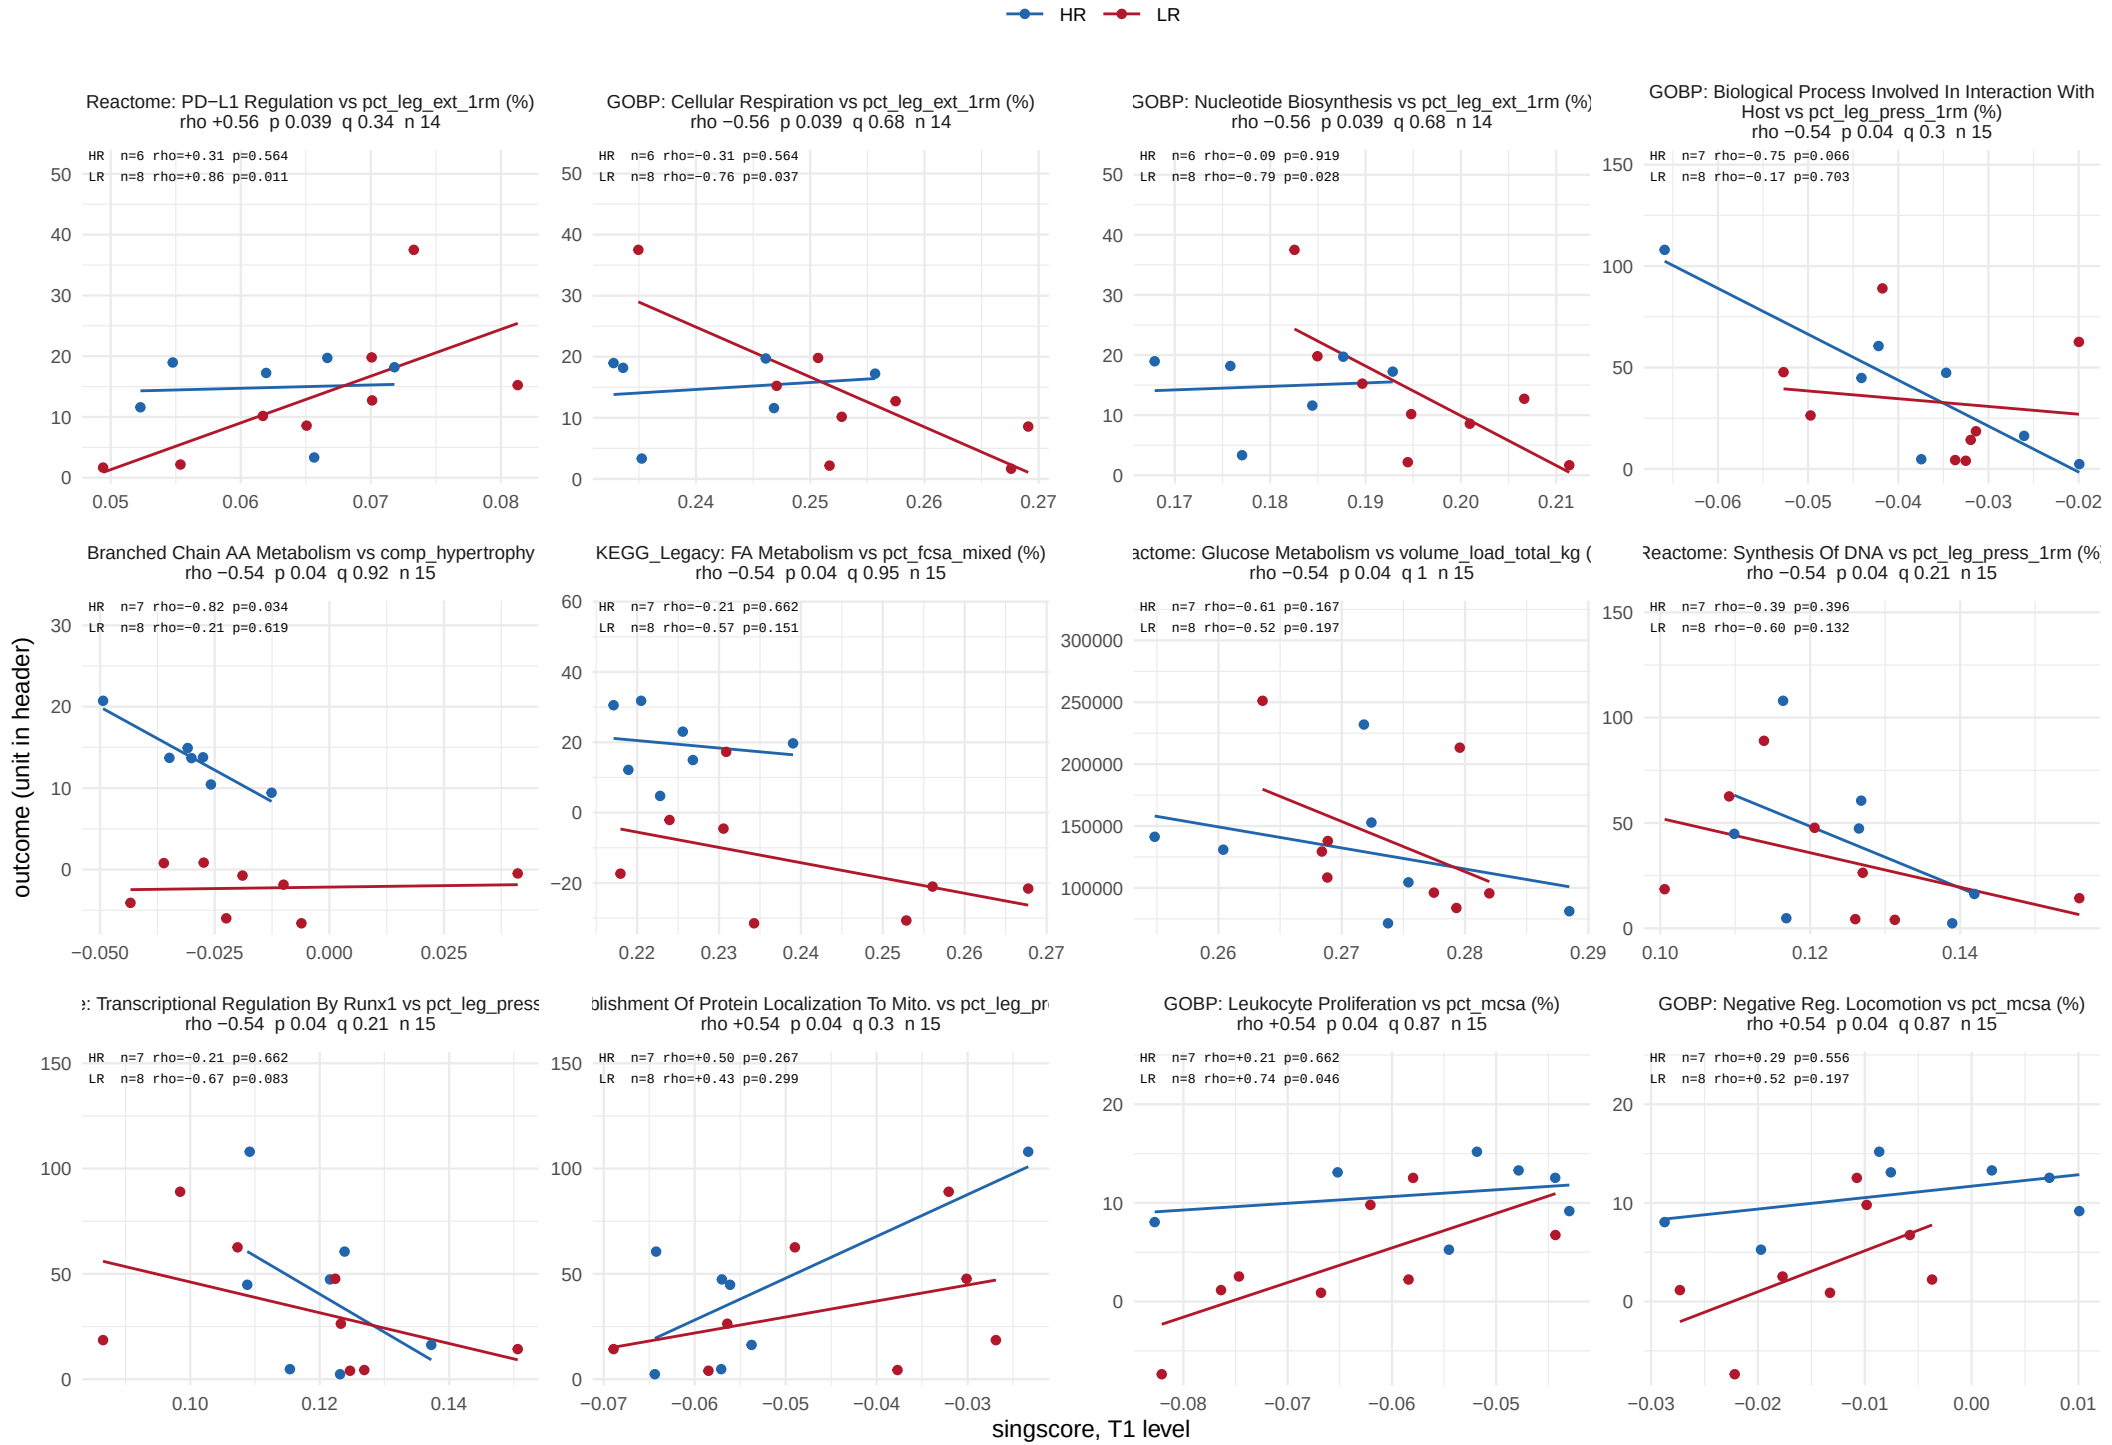


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, baseline window


626 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 41 of 53.

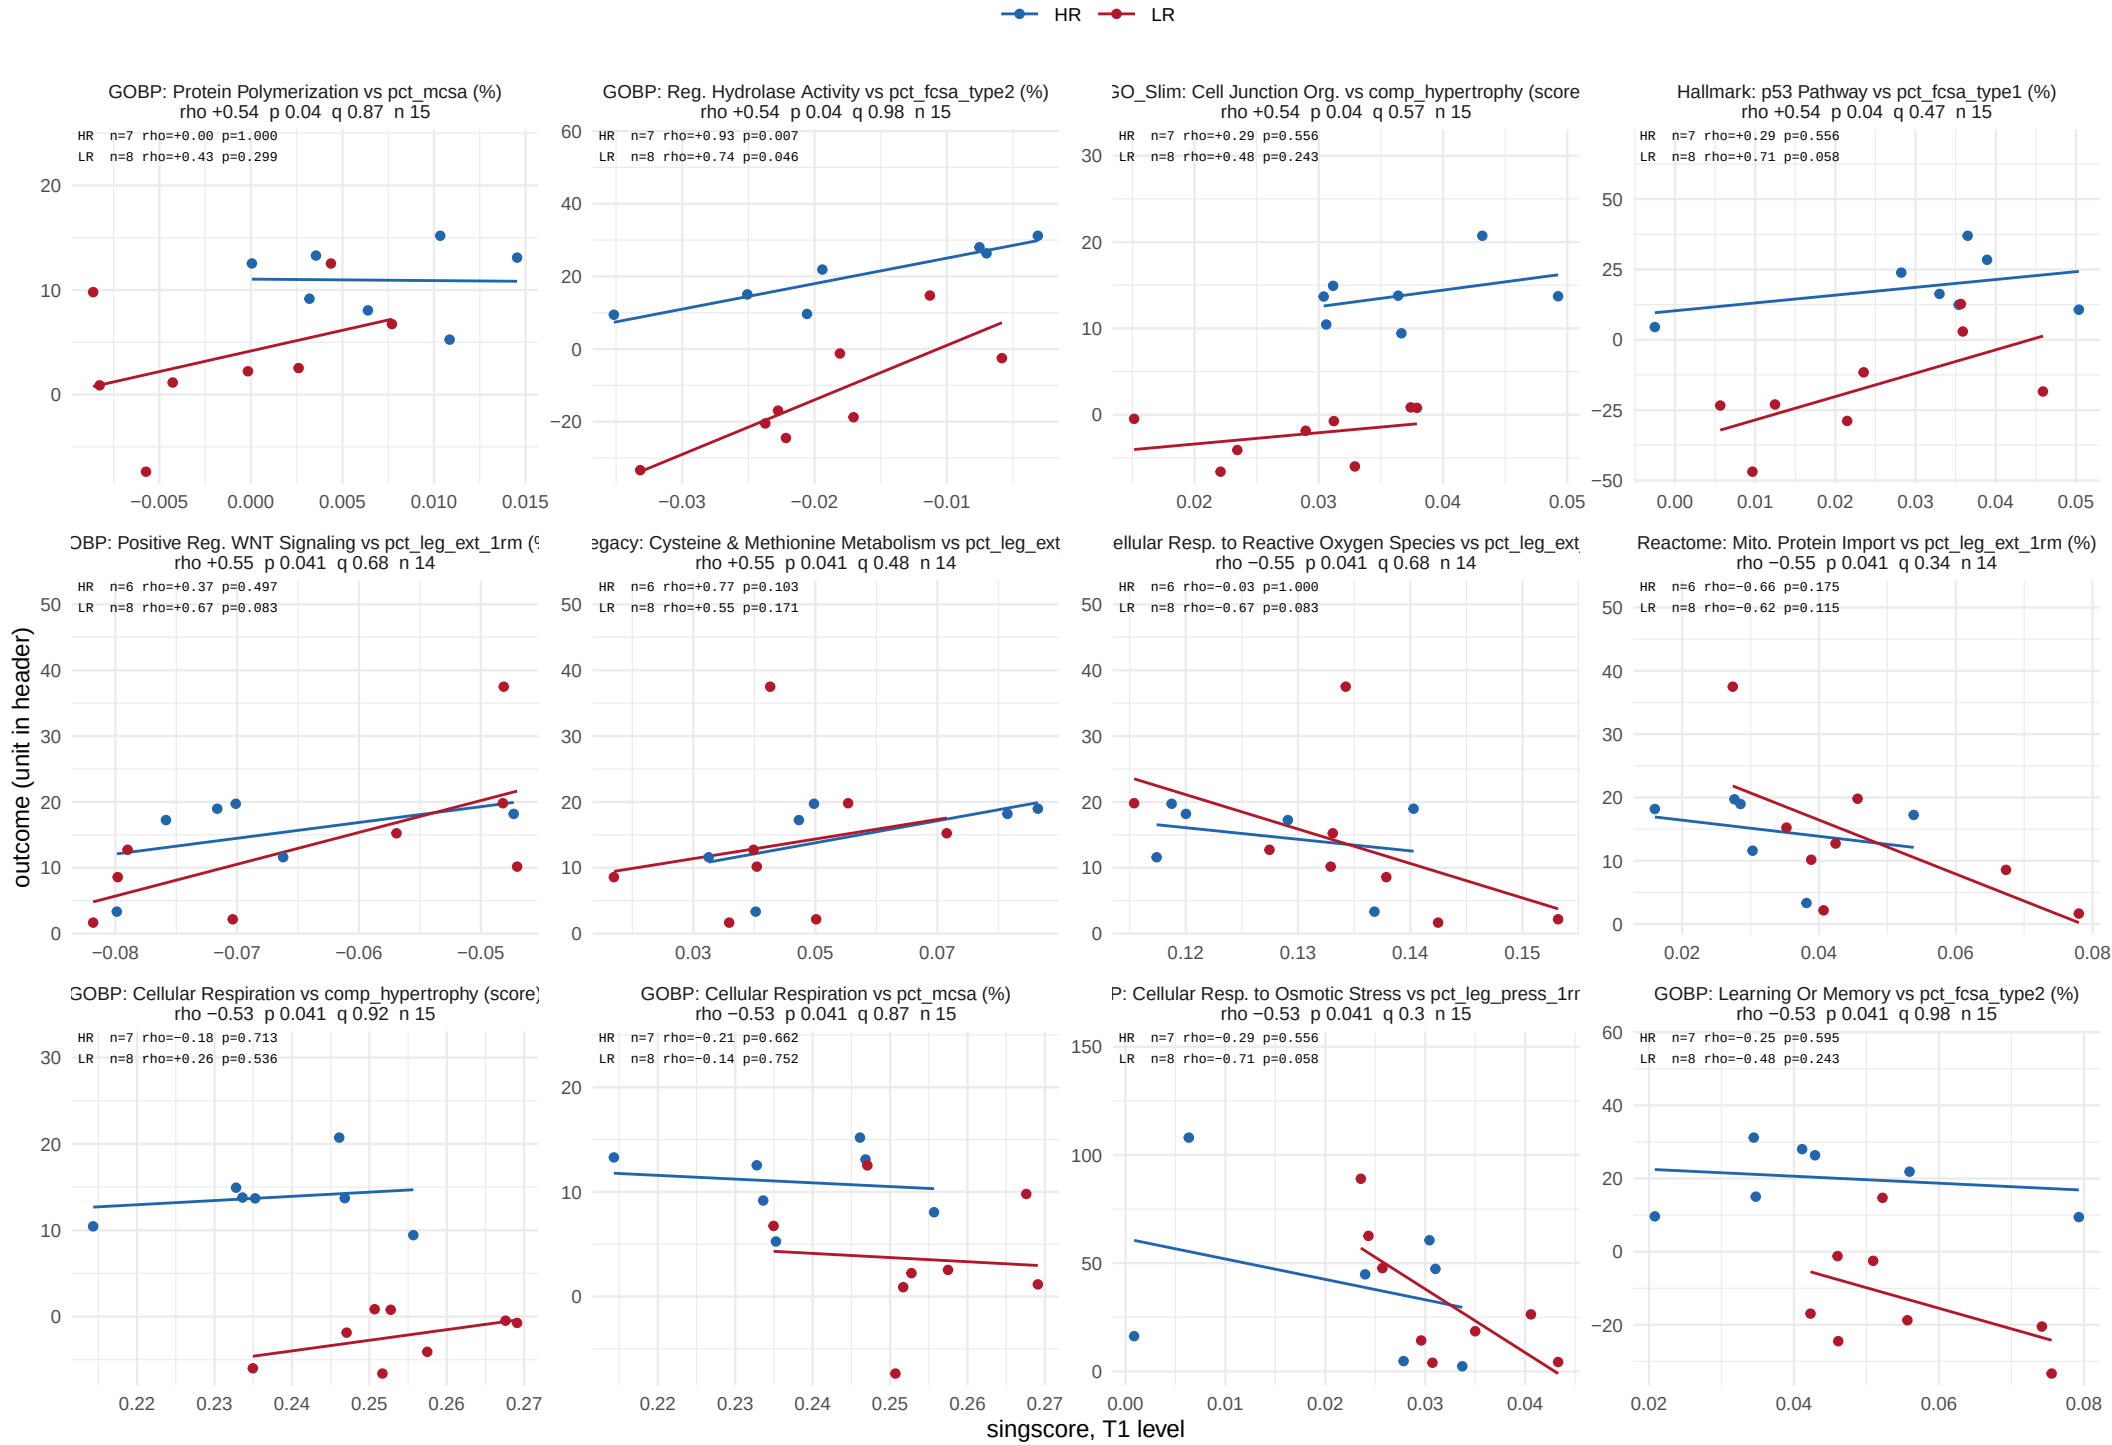


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, baseline window


626 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 42 of 53.

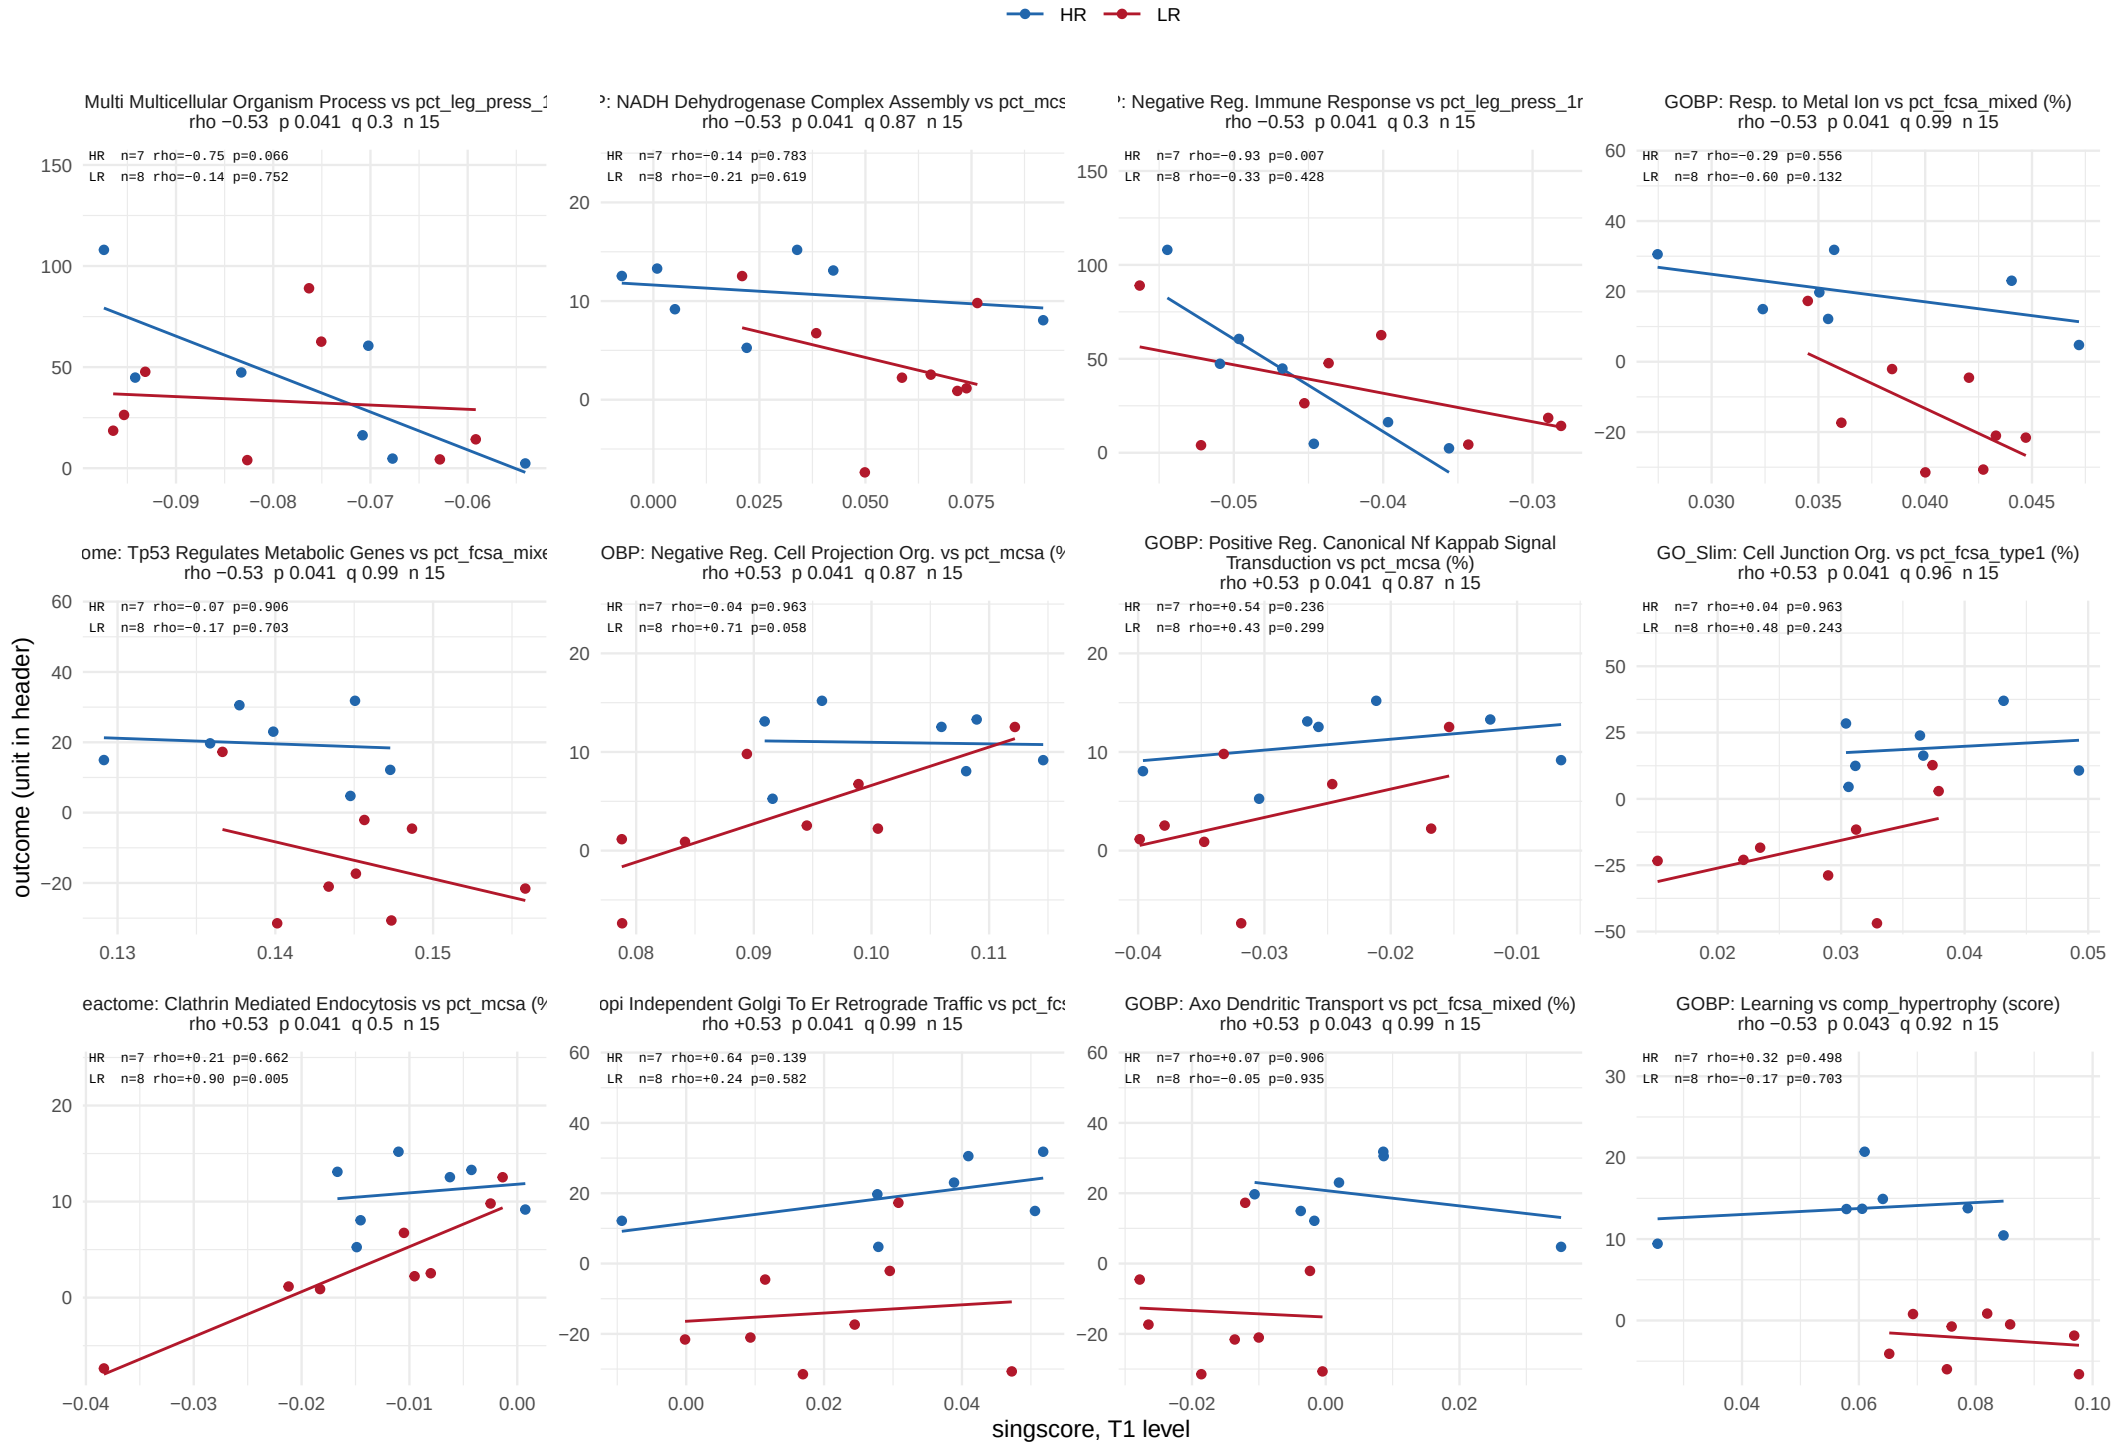


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, baseline window


626 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 43 of 53.

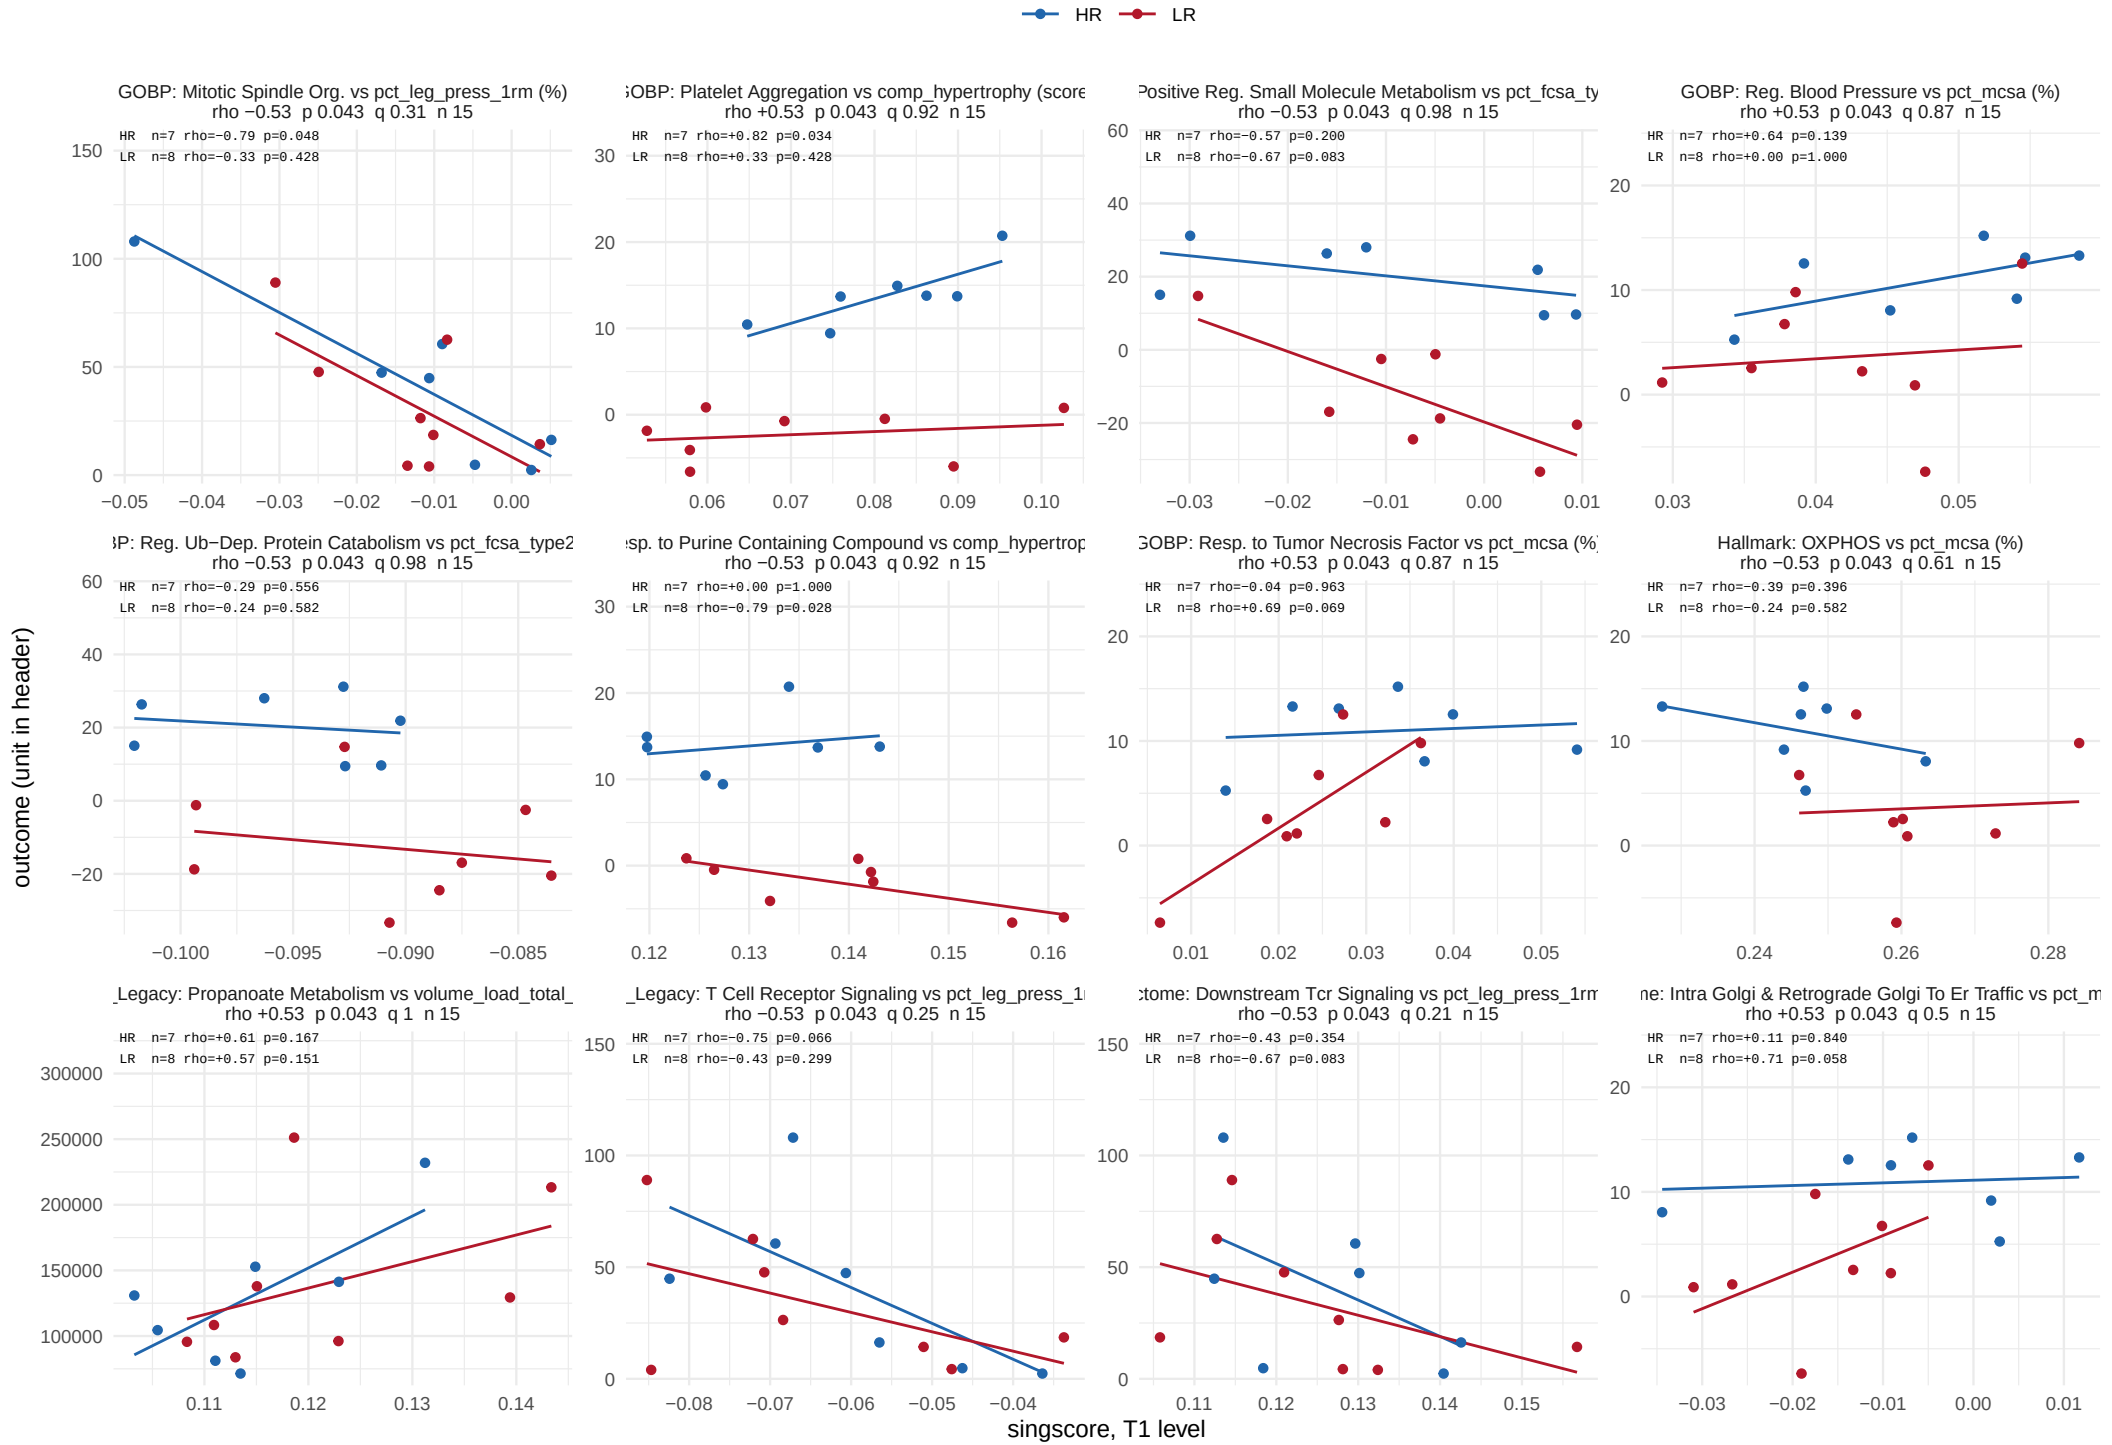


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, baseline window


626 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 44 of 53.

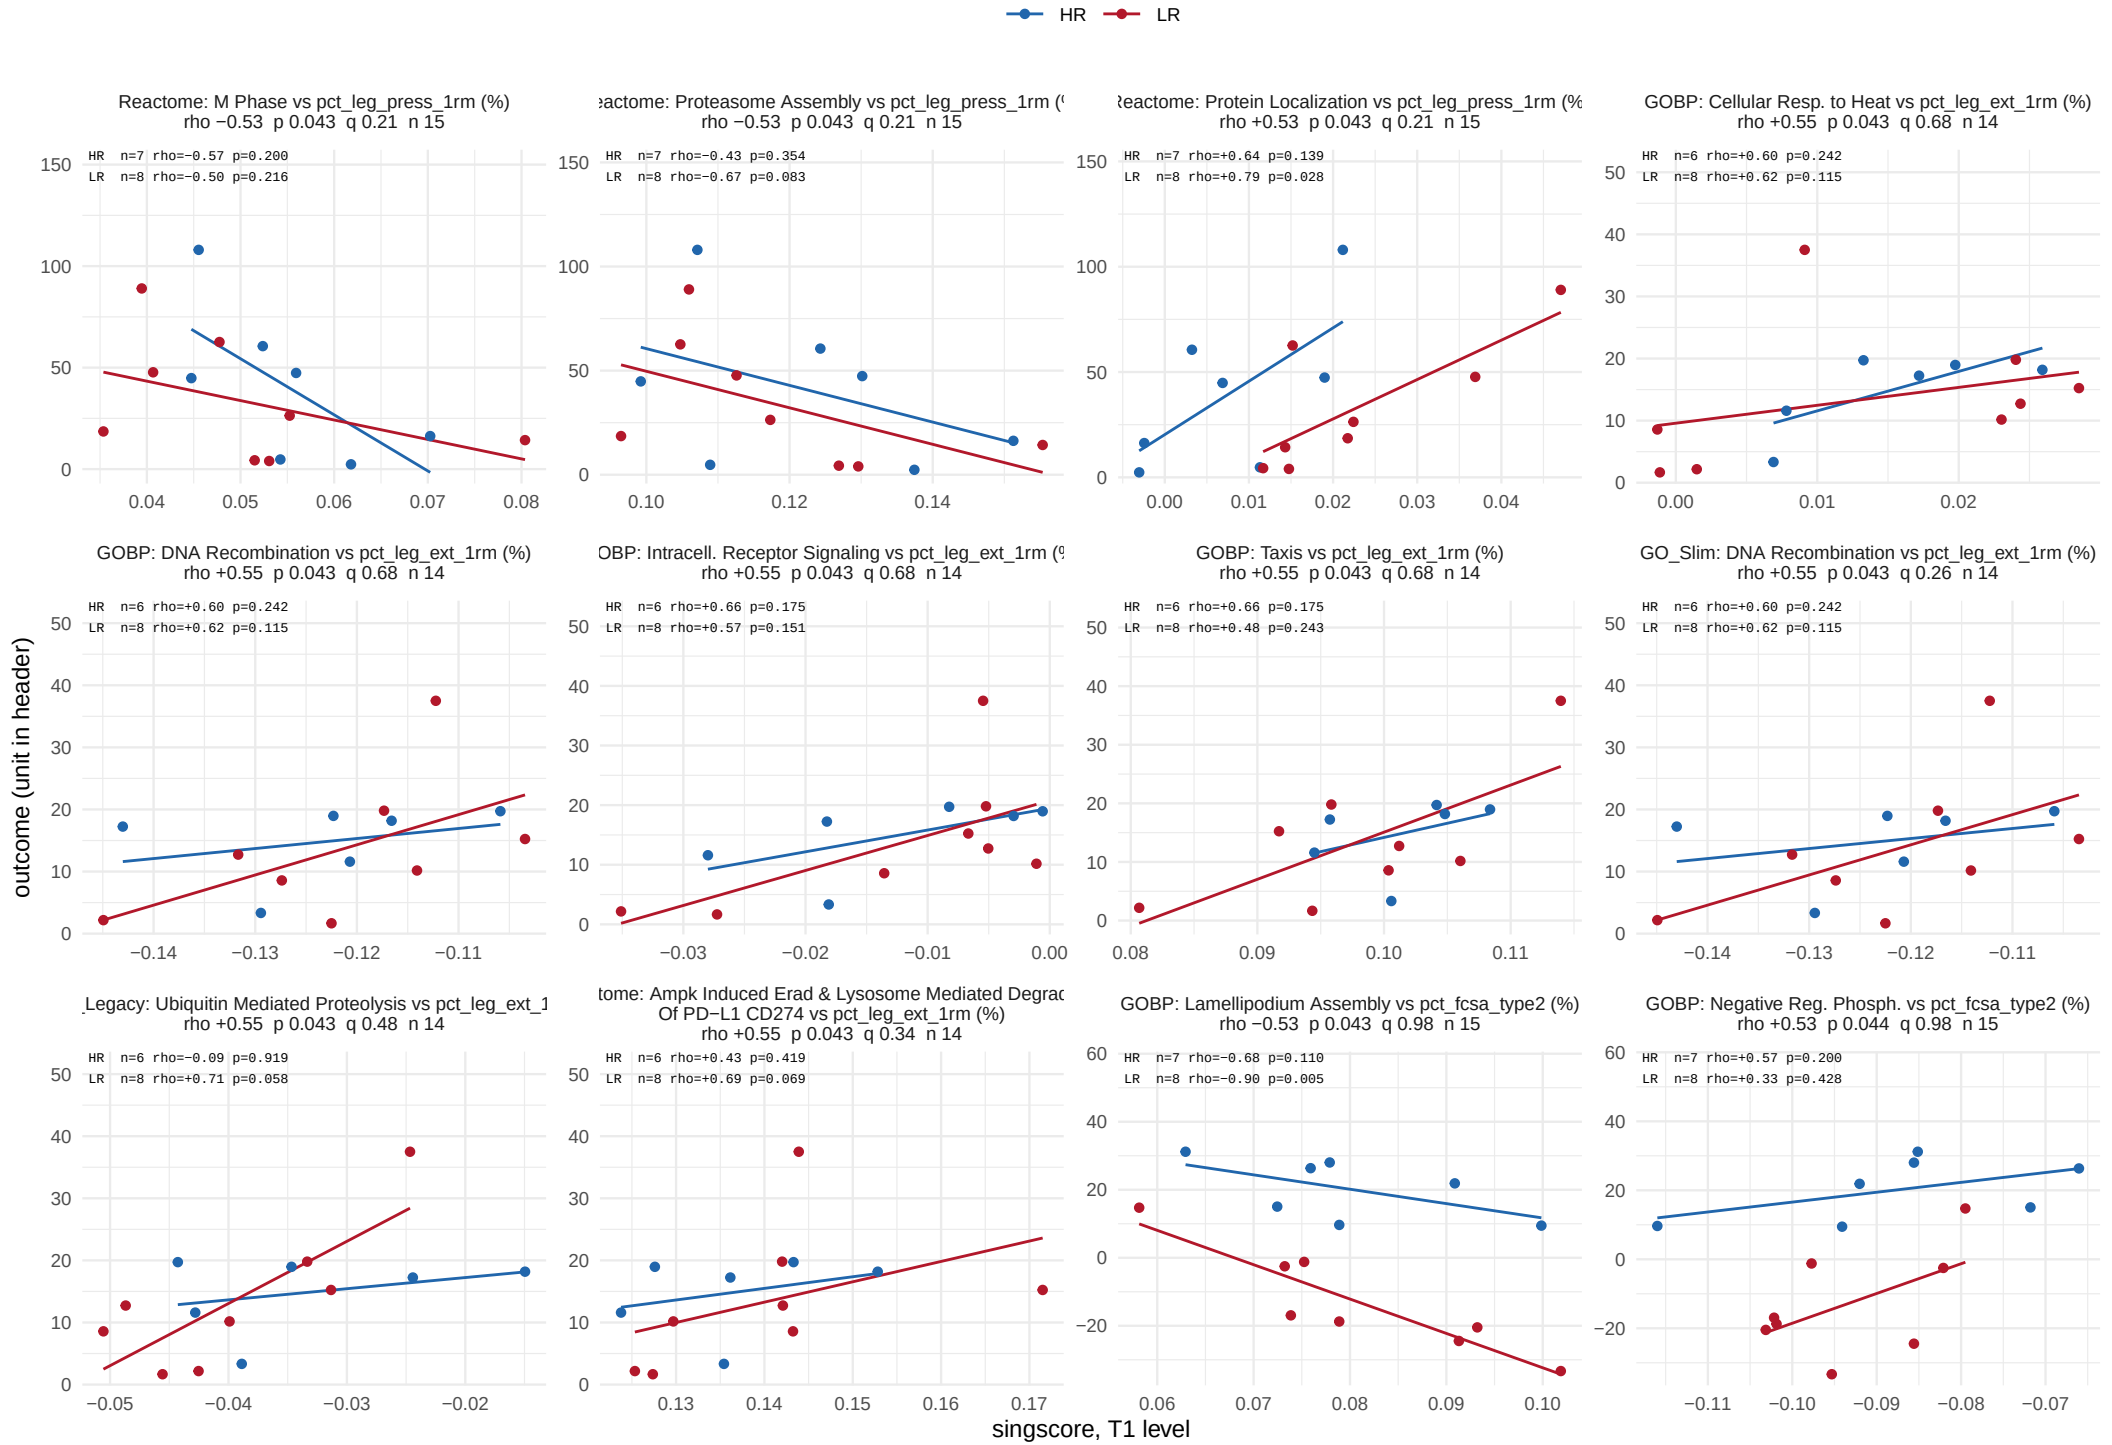


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, baseline window


626 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 45 of 53.

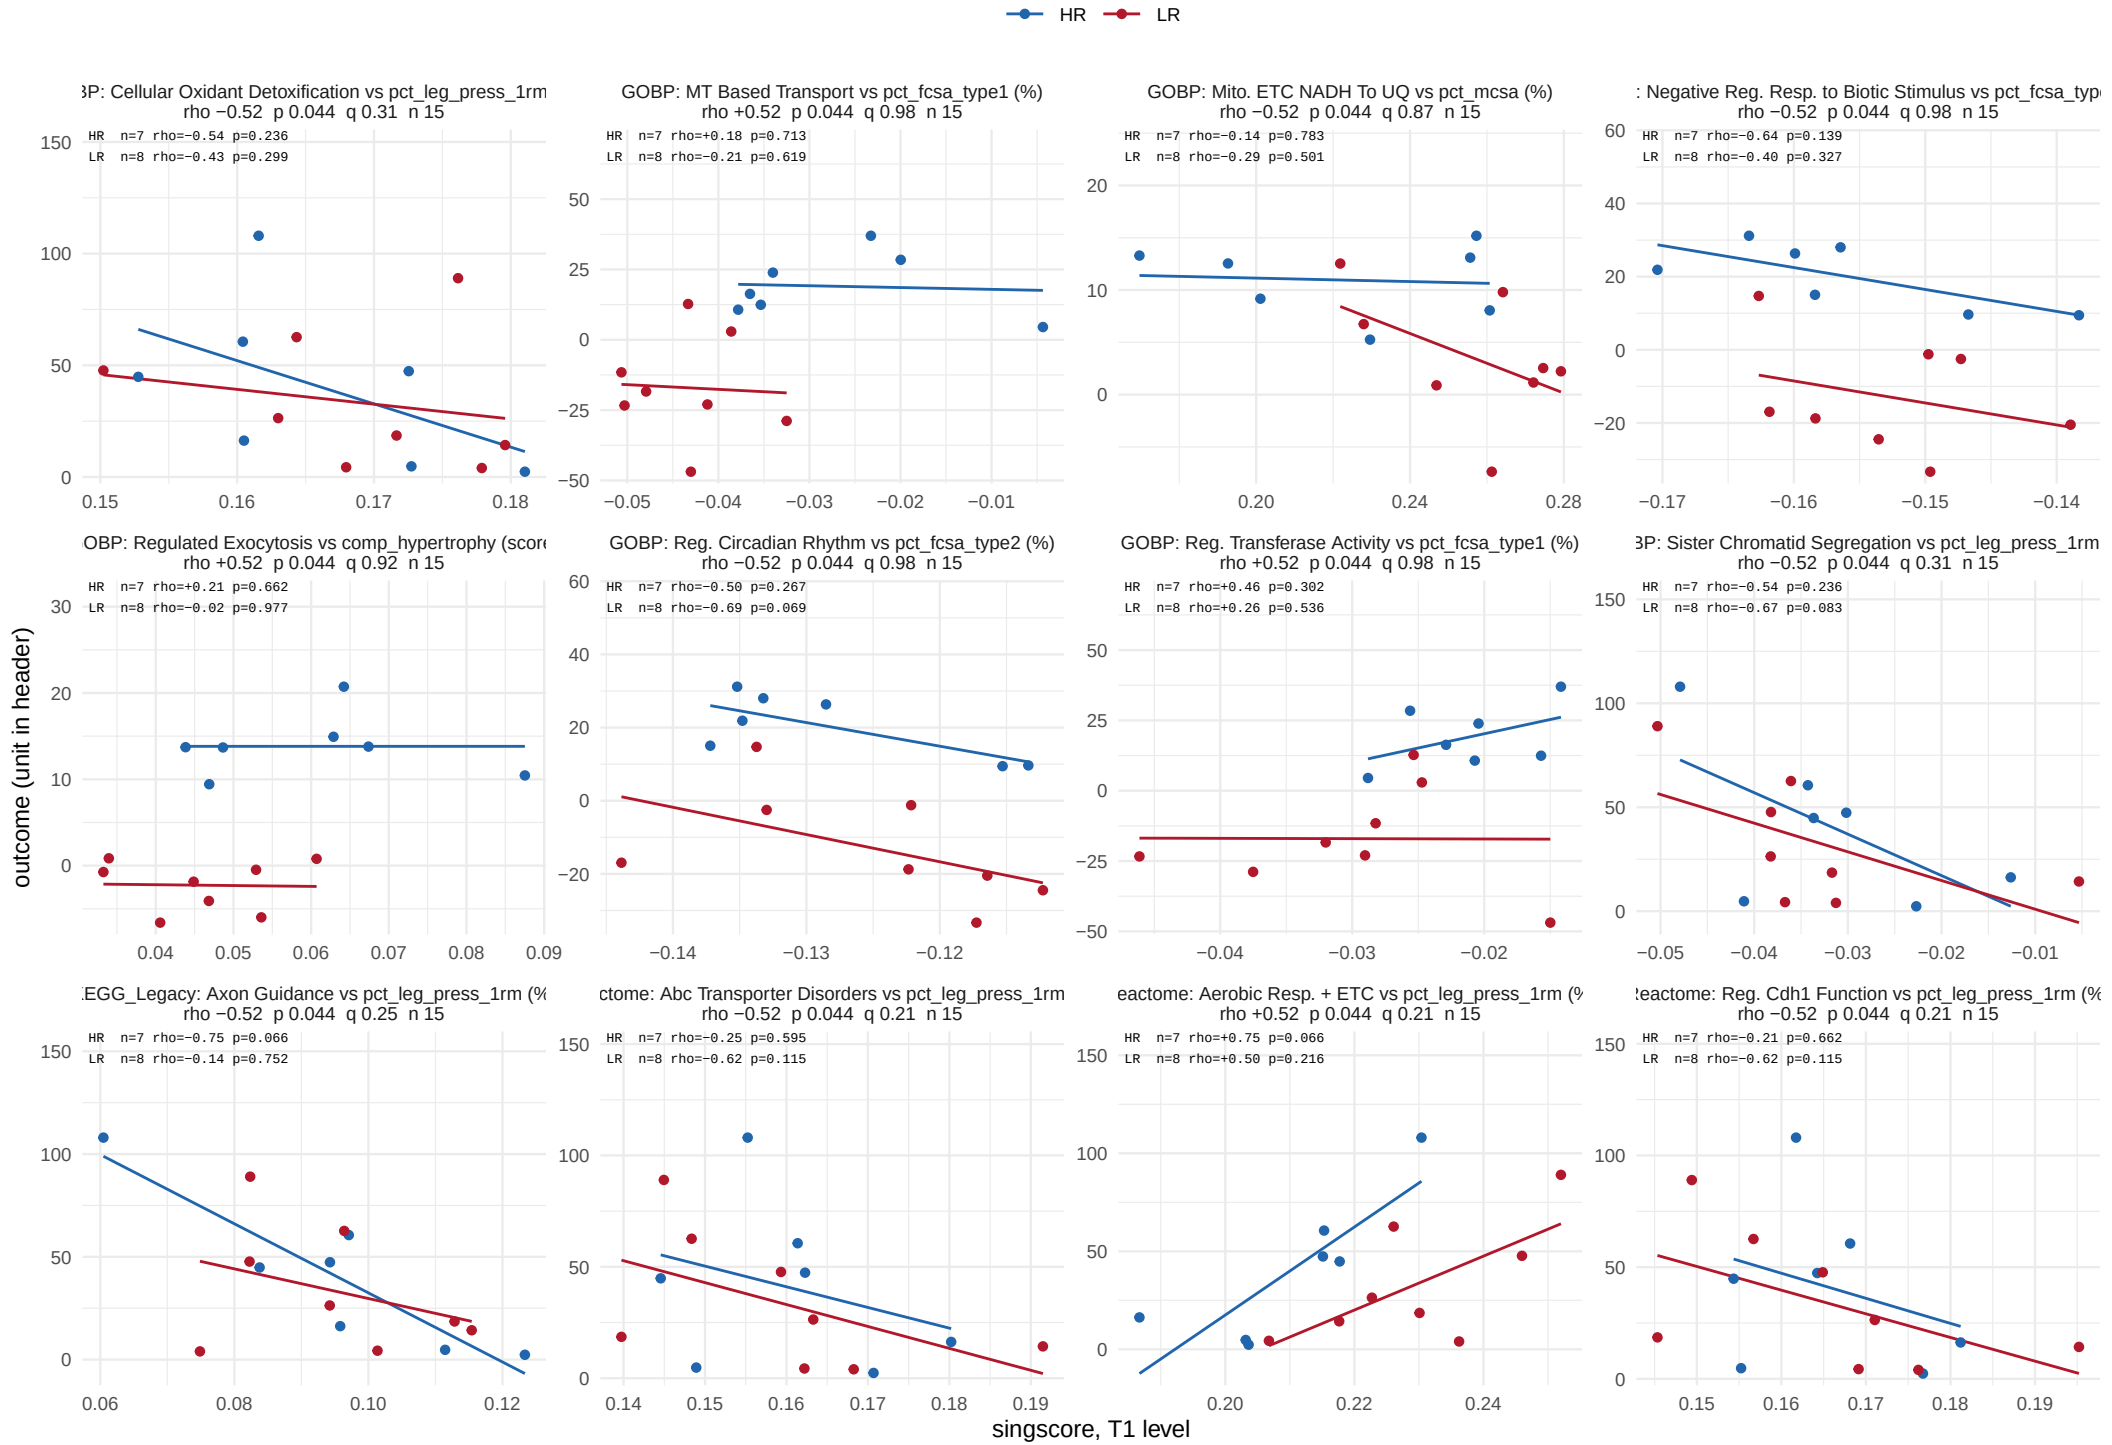


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, baseline window


626 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 46 of 53.

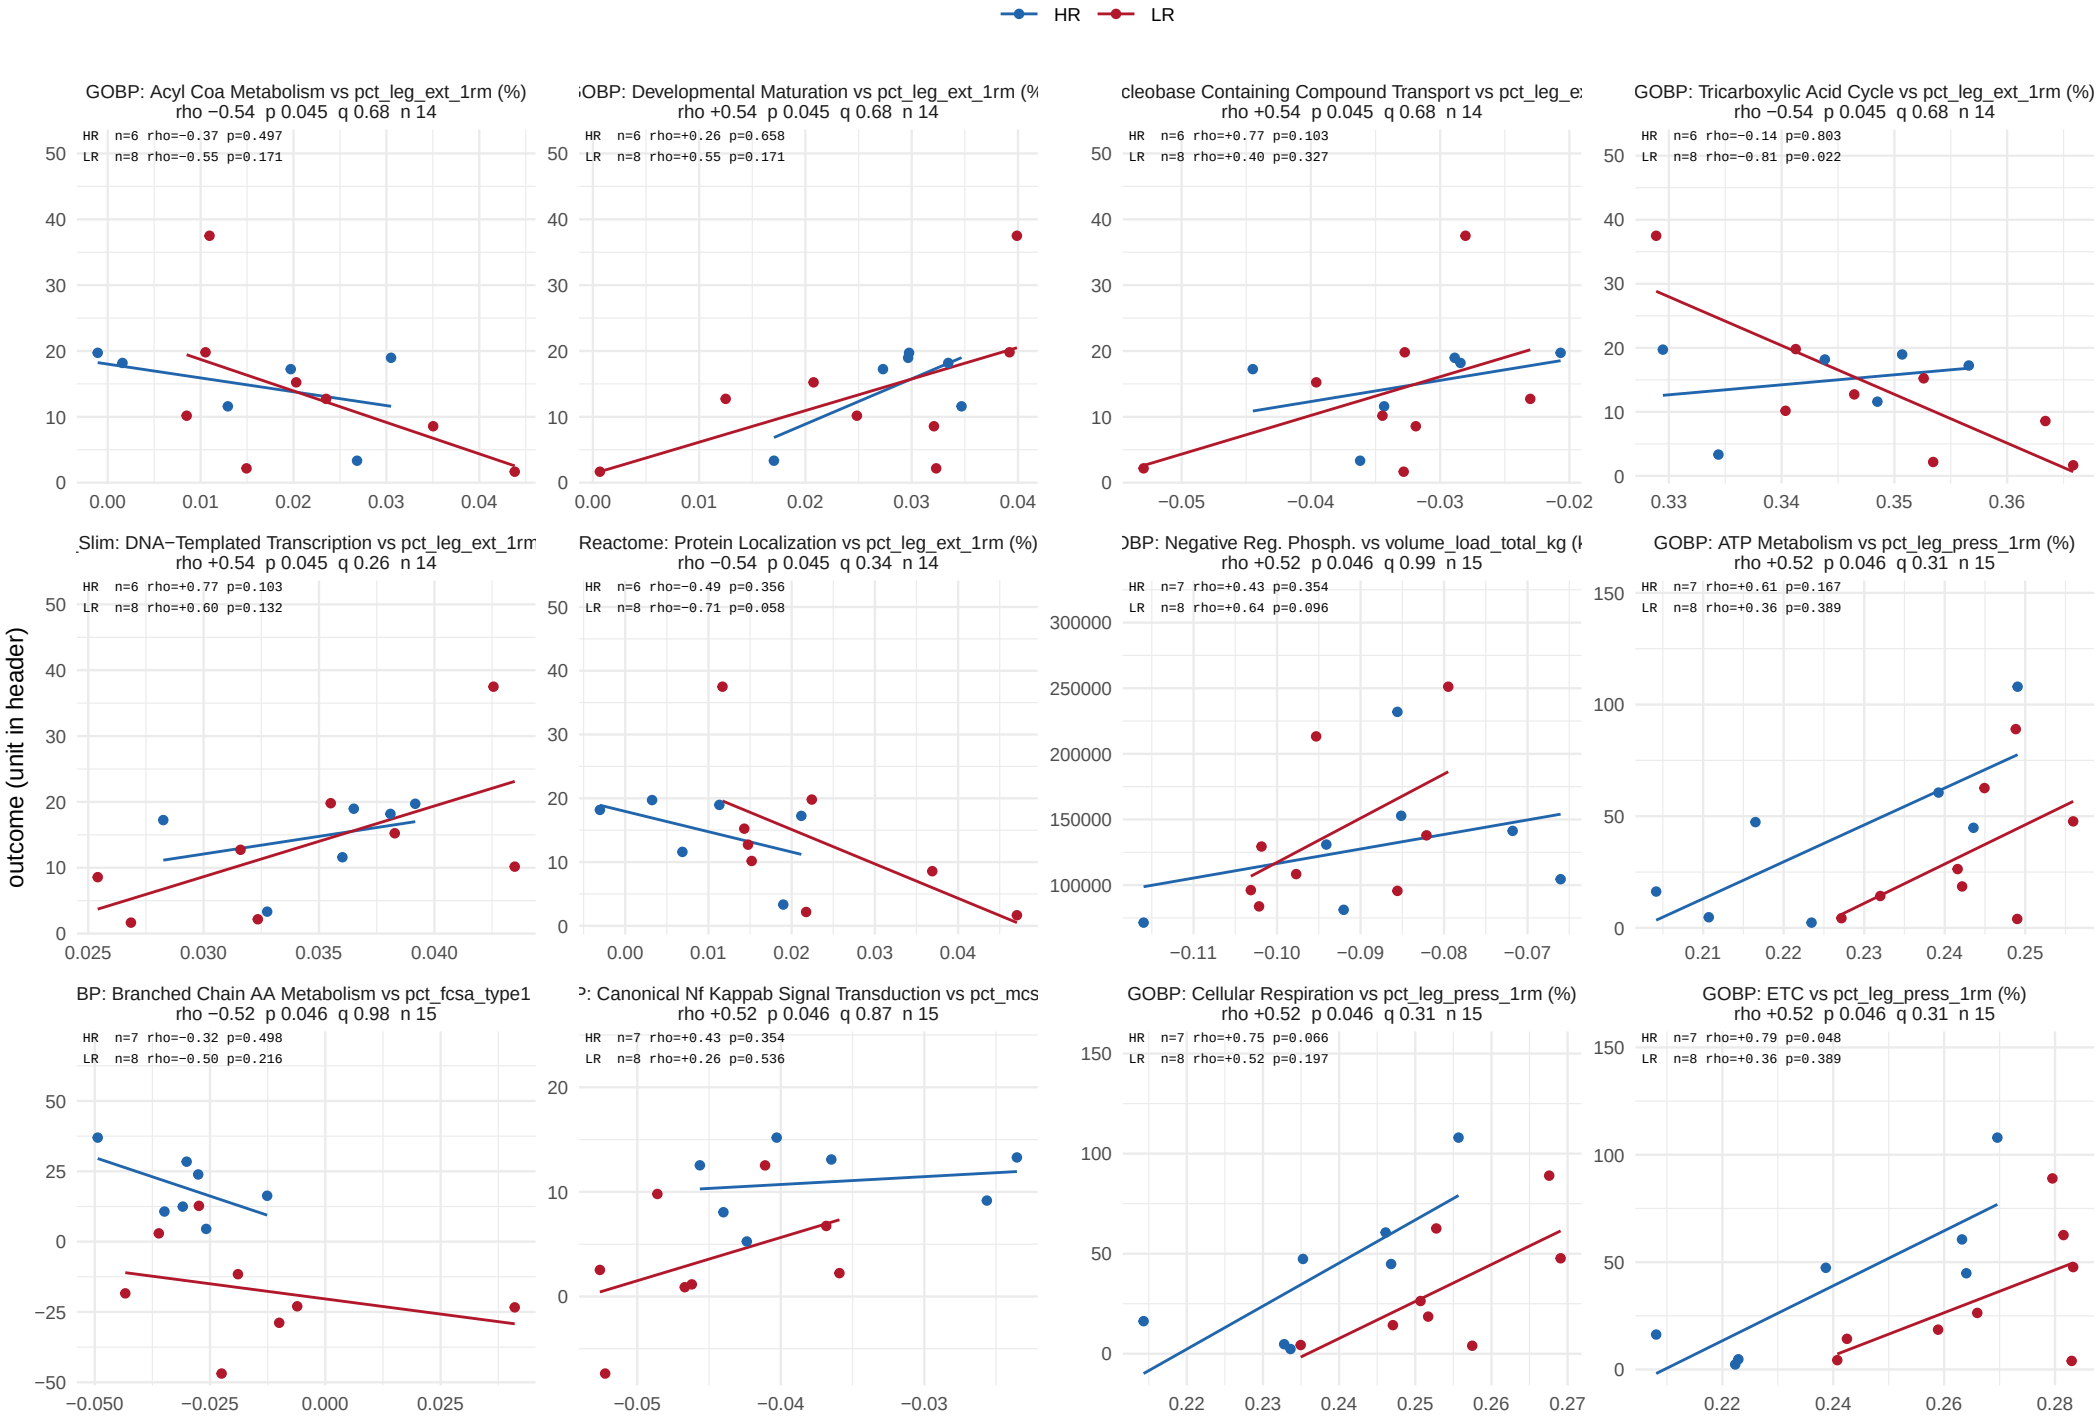


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, baseline window


626 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 47 of 53.

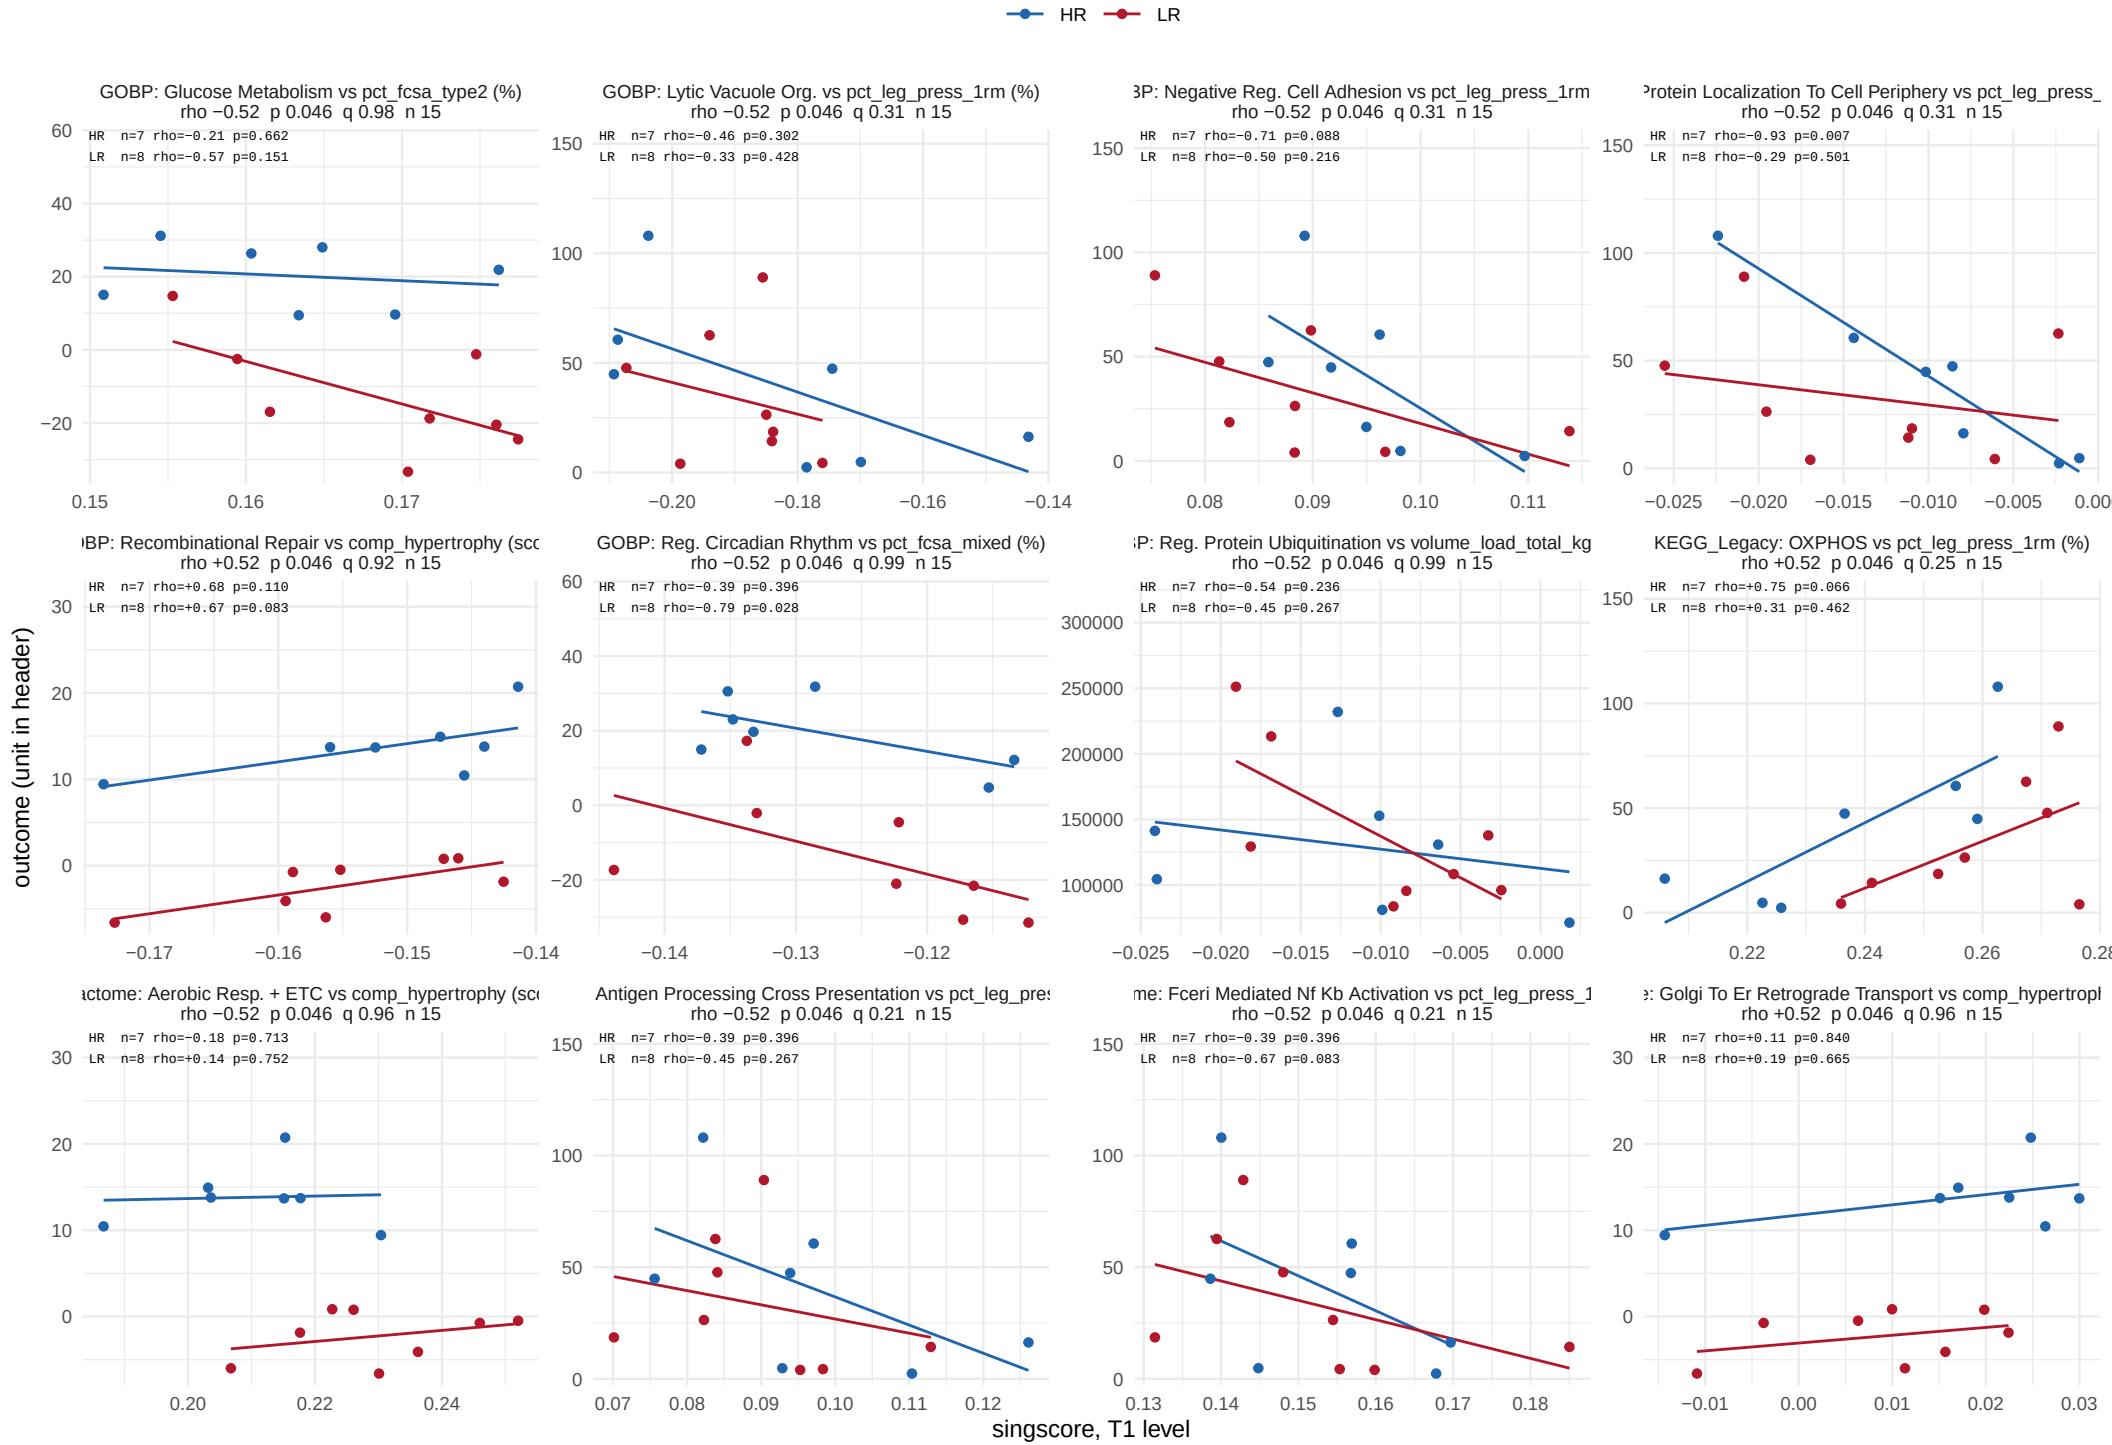


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, baseline window


626 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 48 of 53.

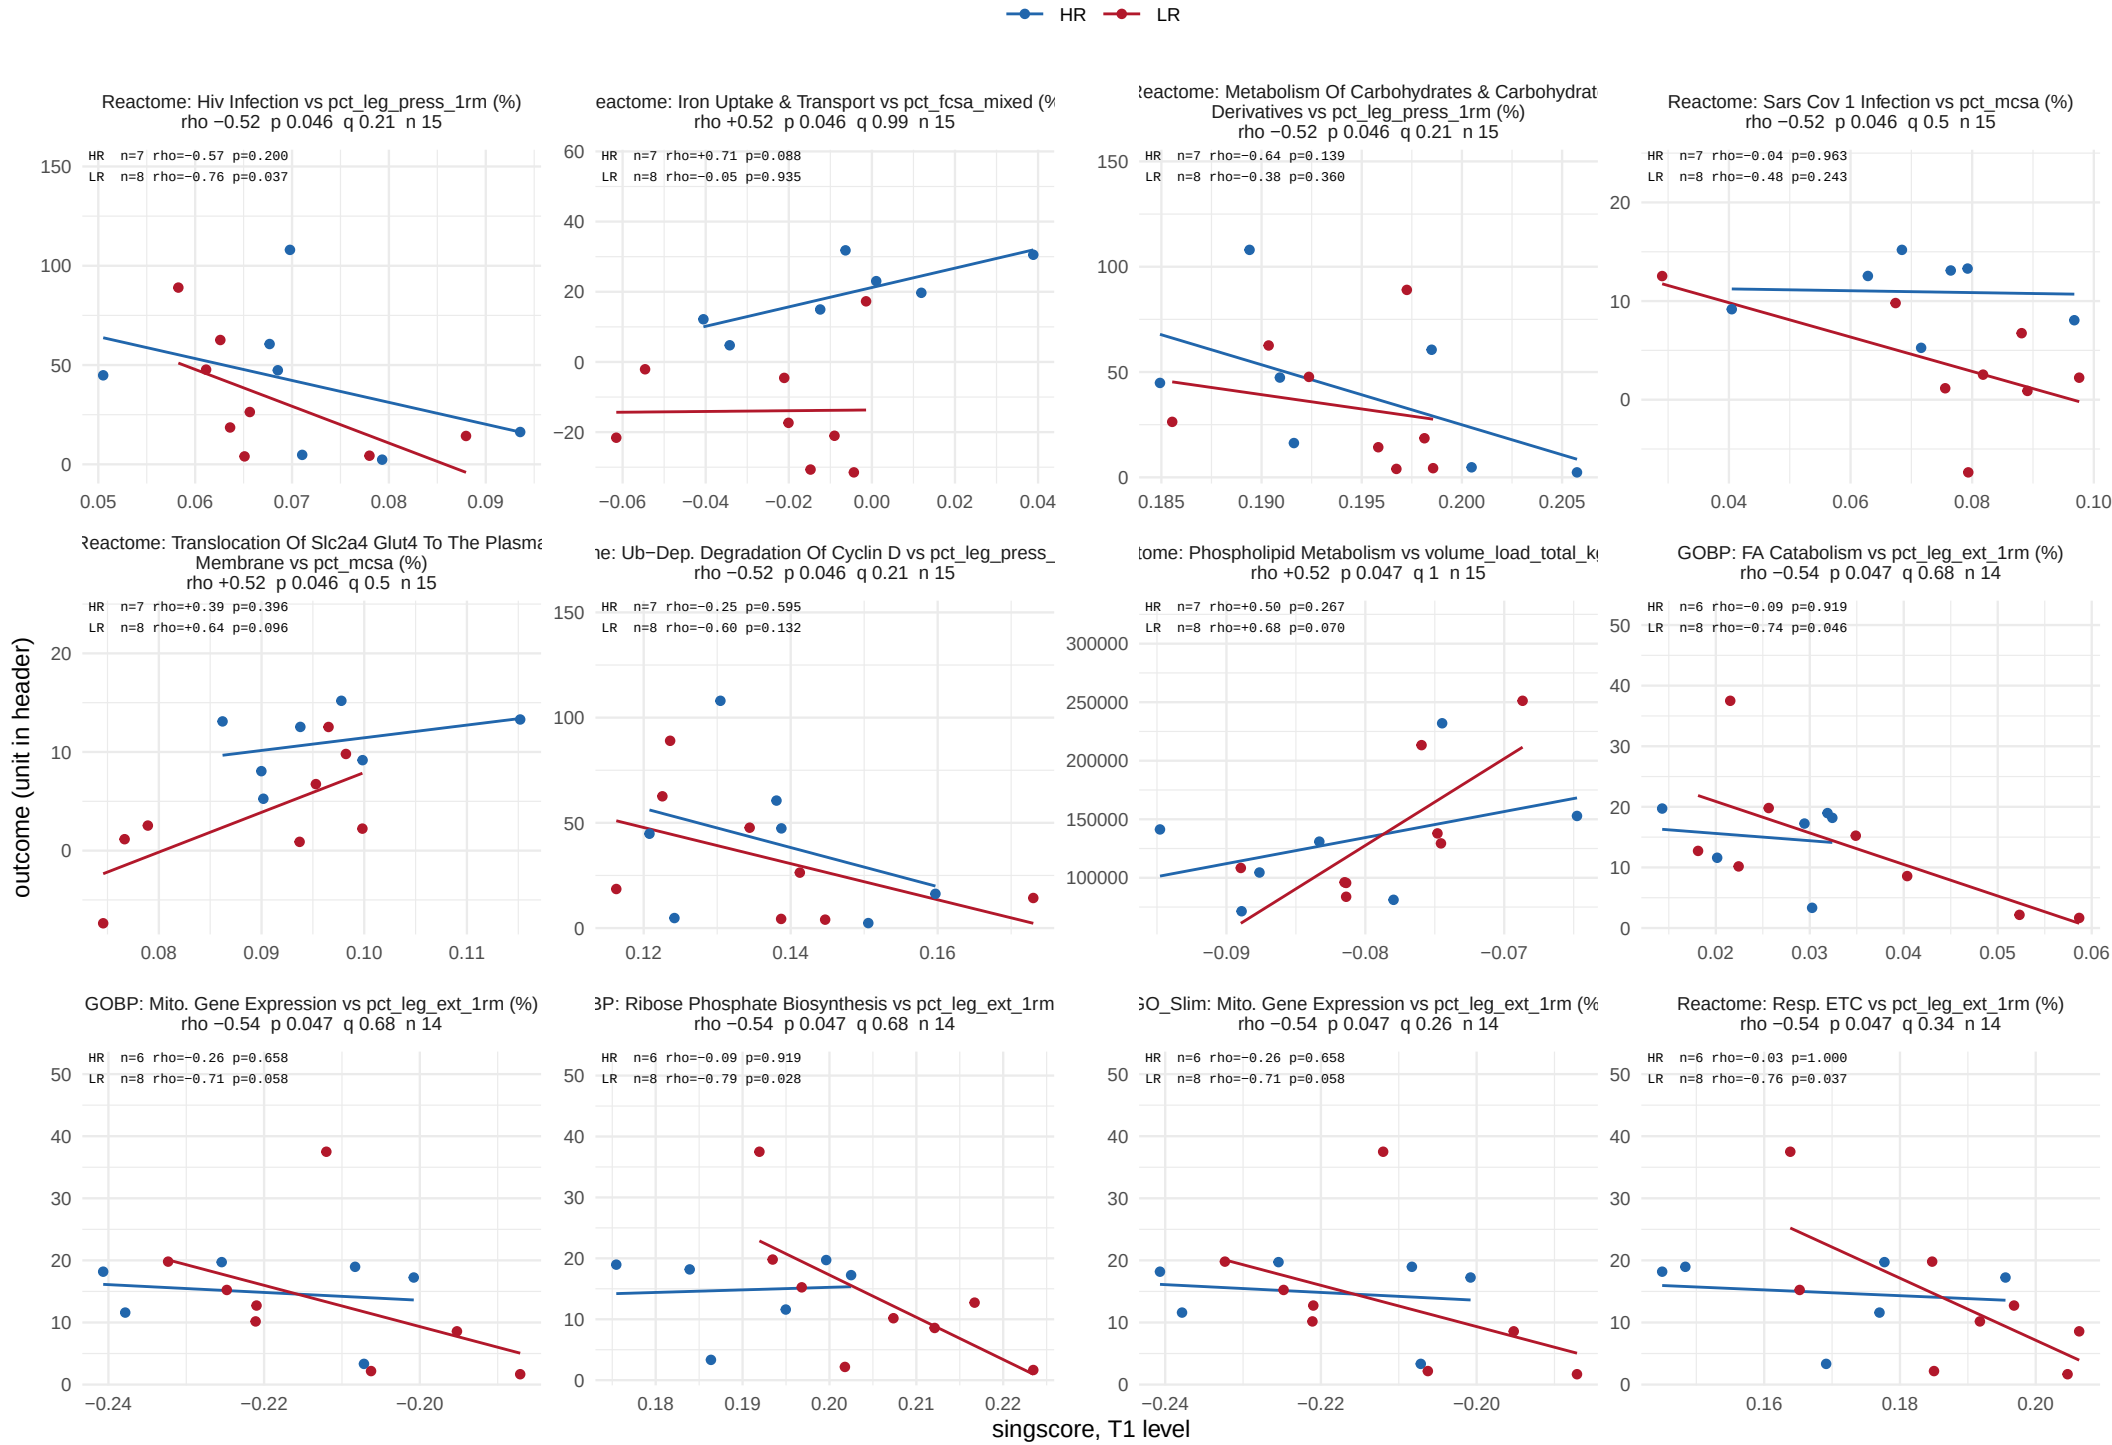


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, baseline window


626 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 49 of 53.

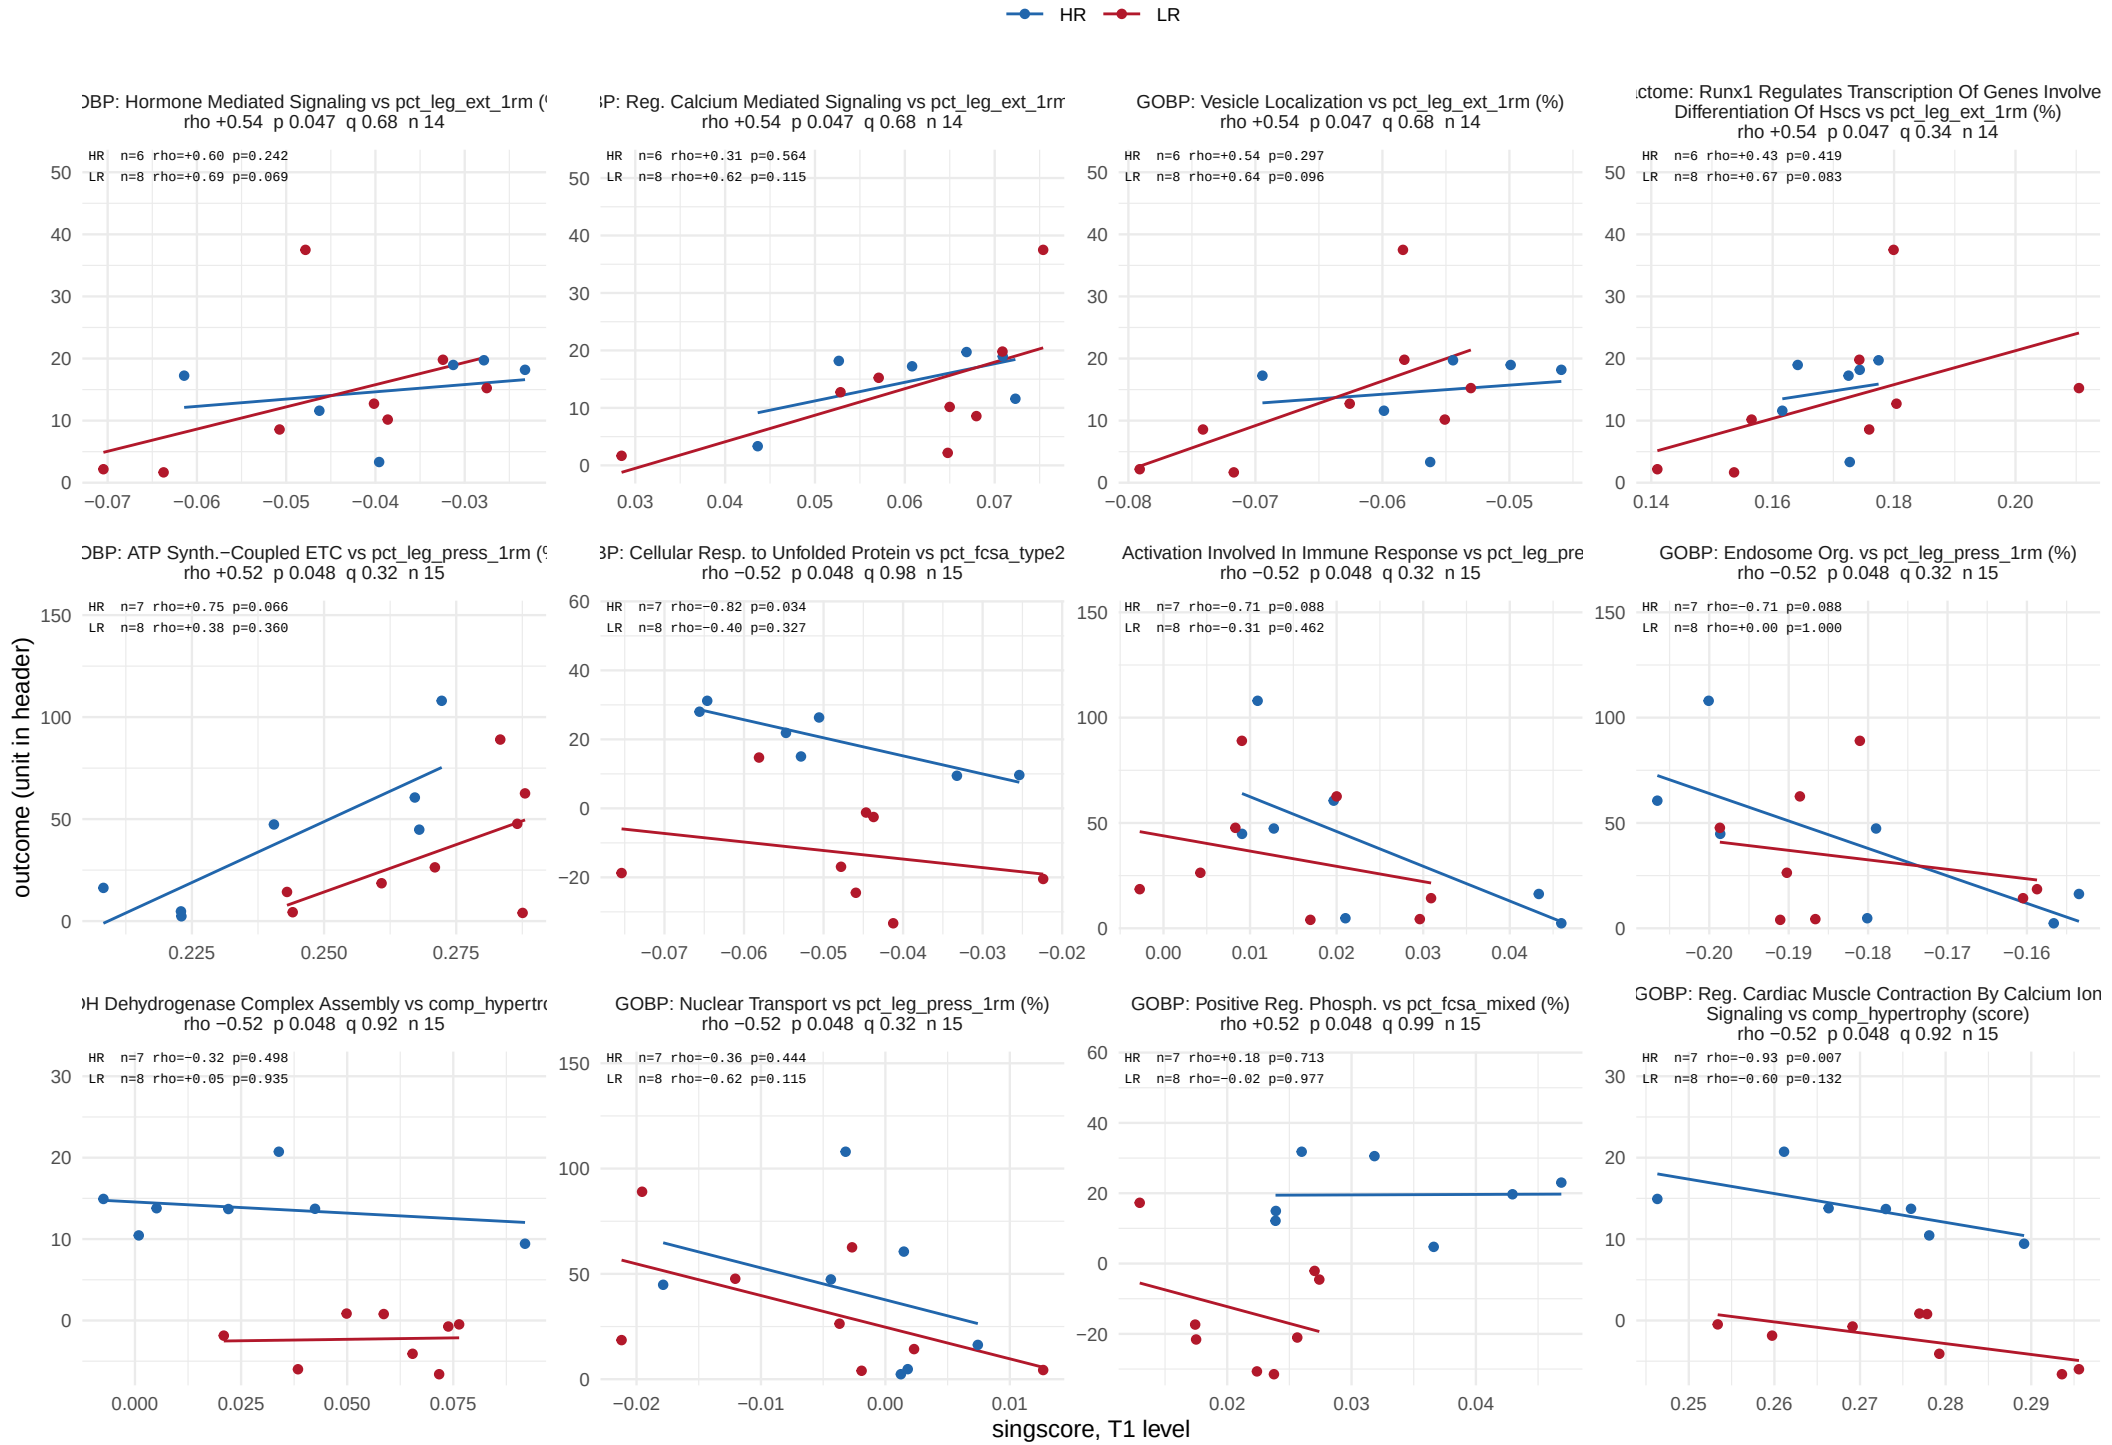


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, baseline window


626 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 50 of 53.

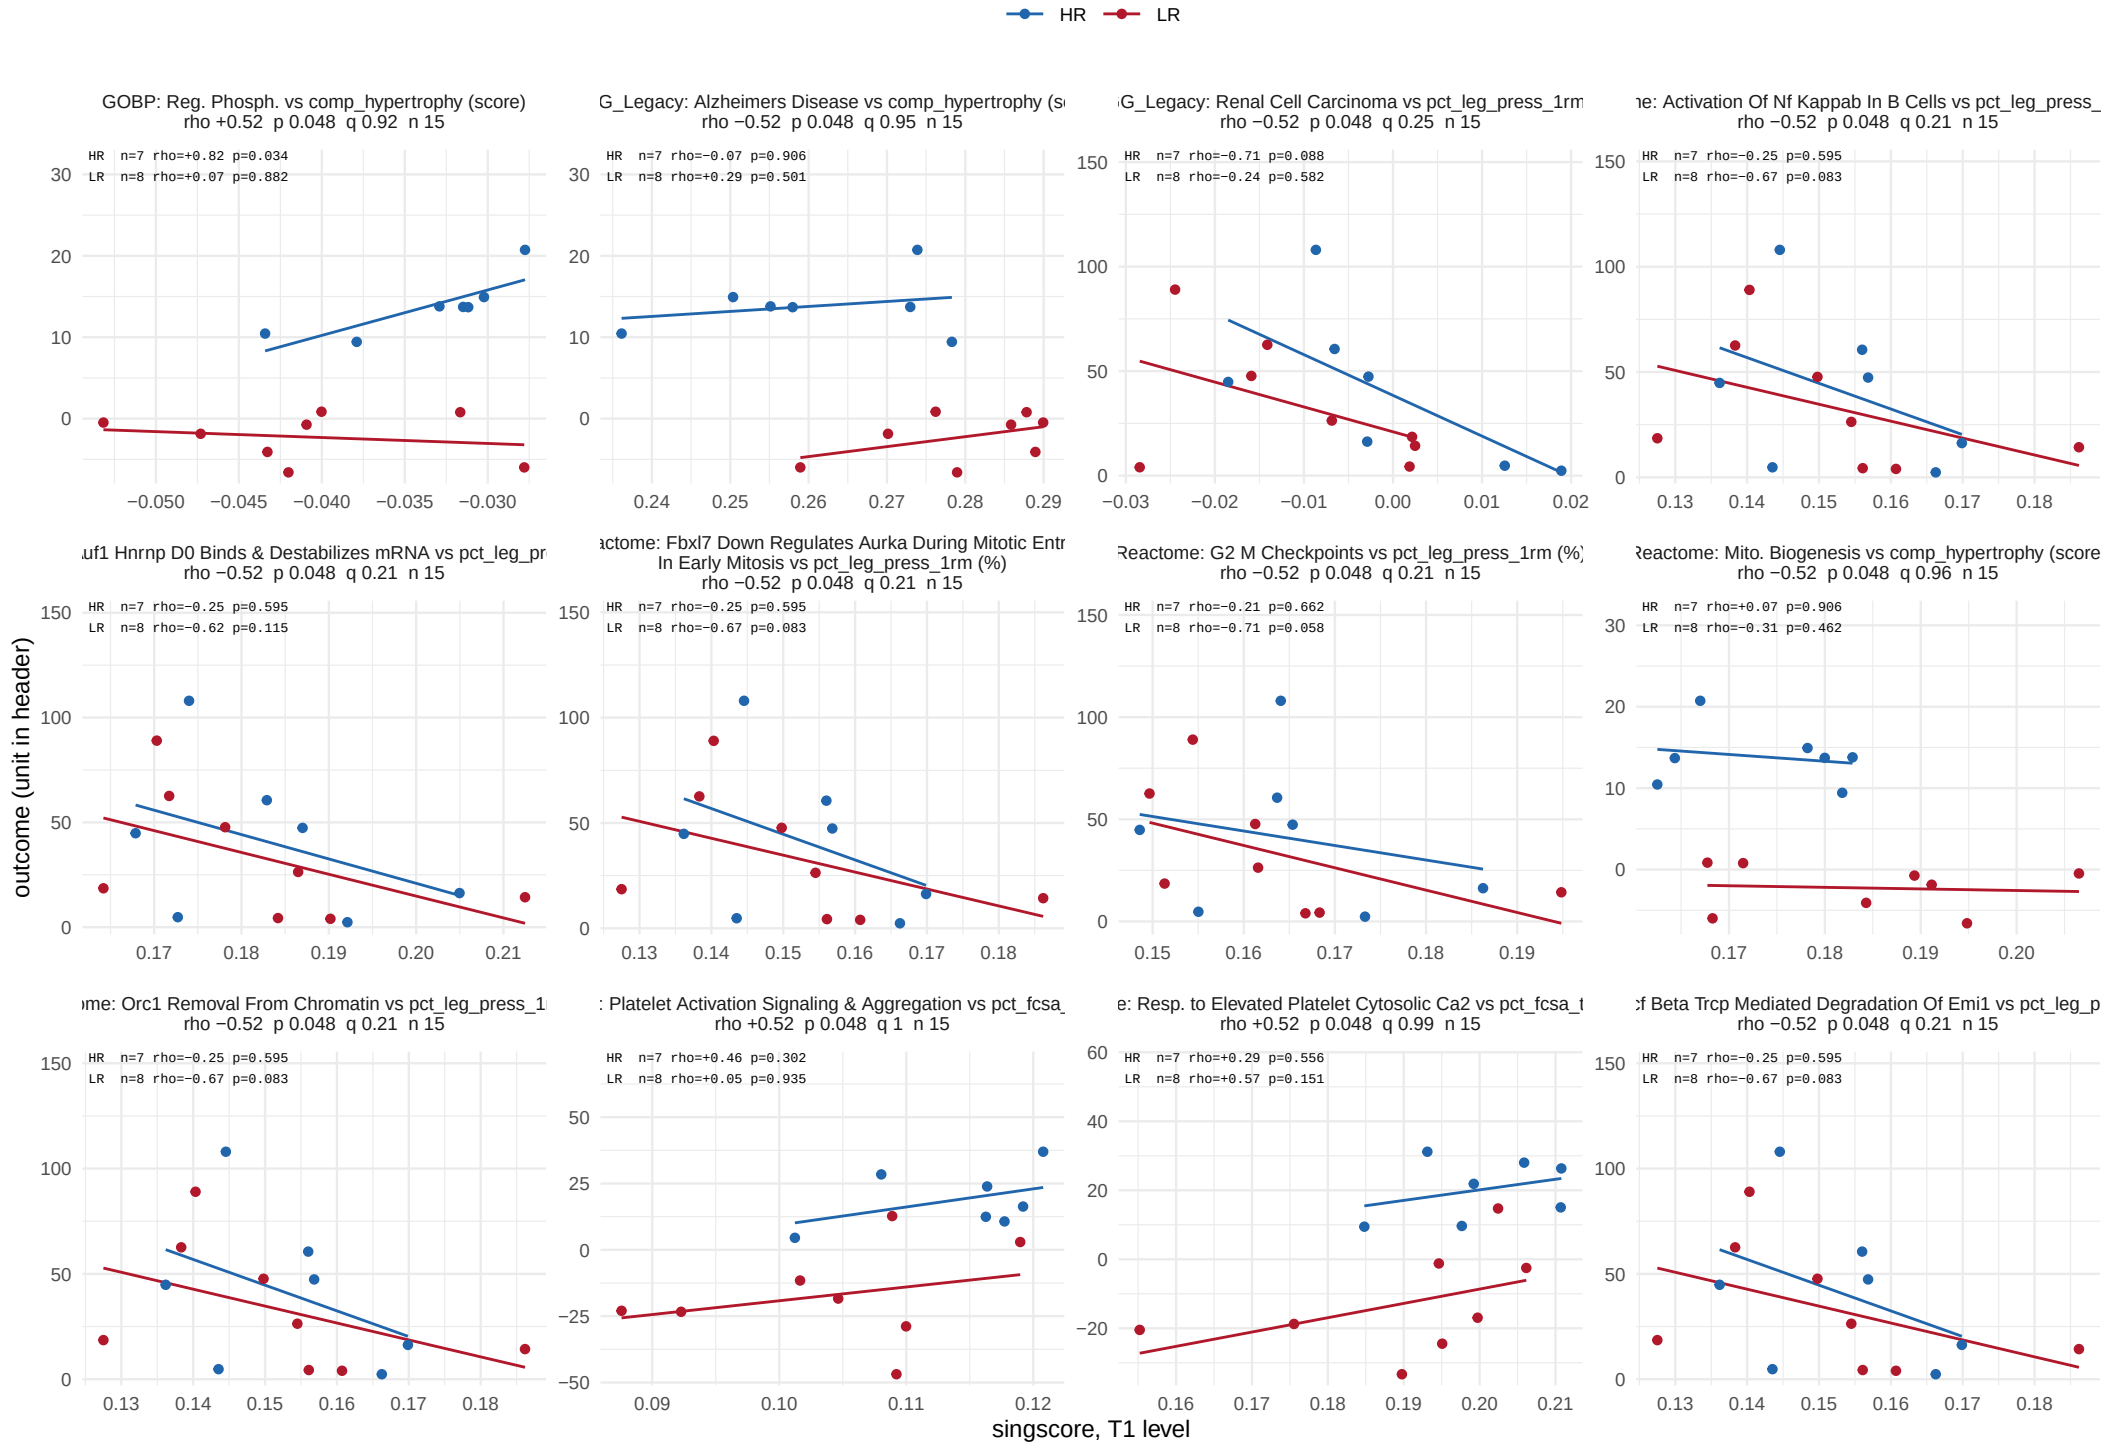


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, baseline window


626 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 51 of 53.

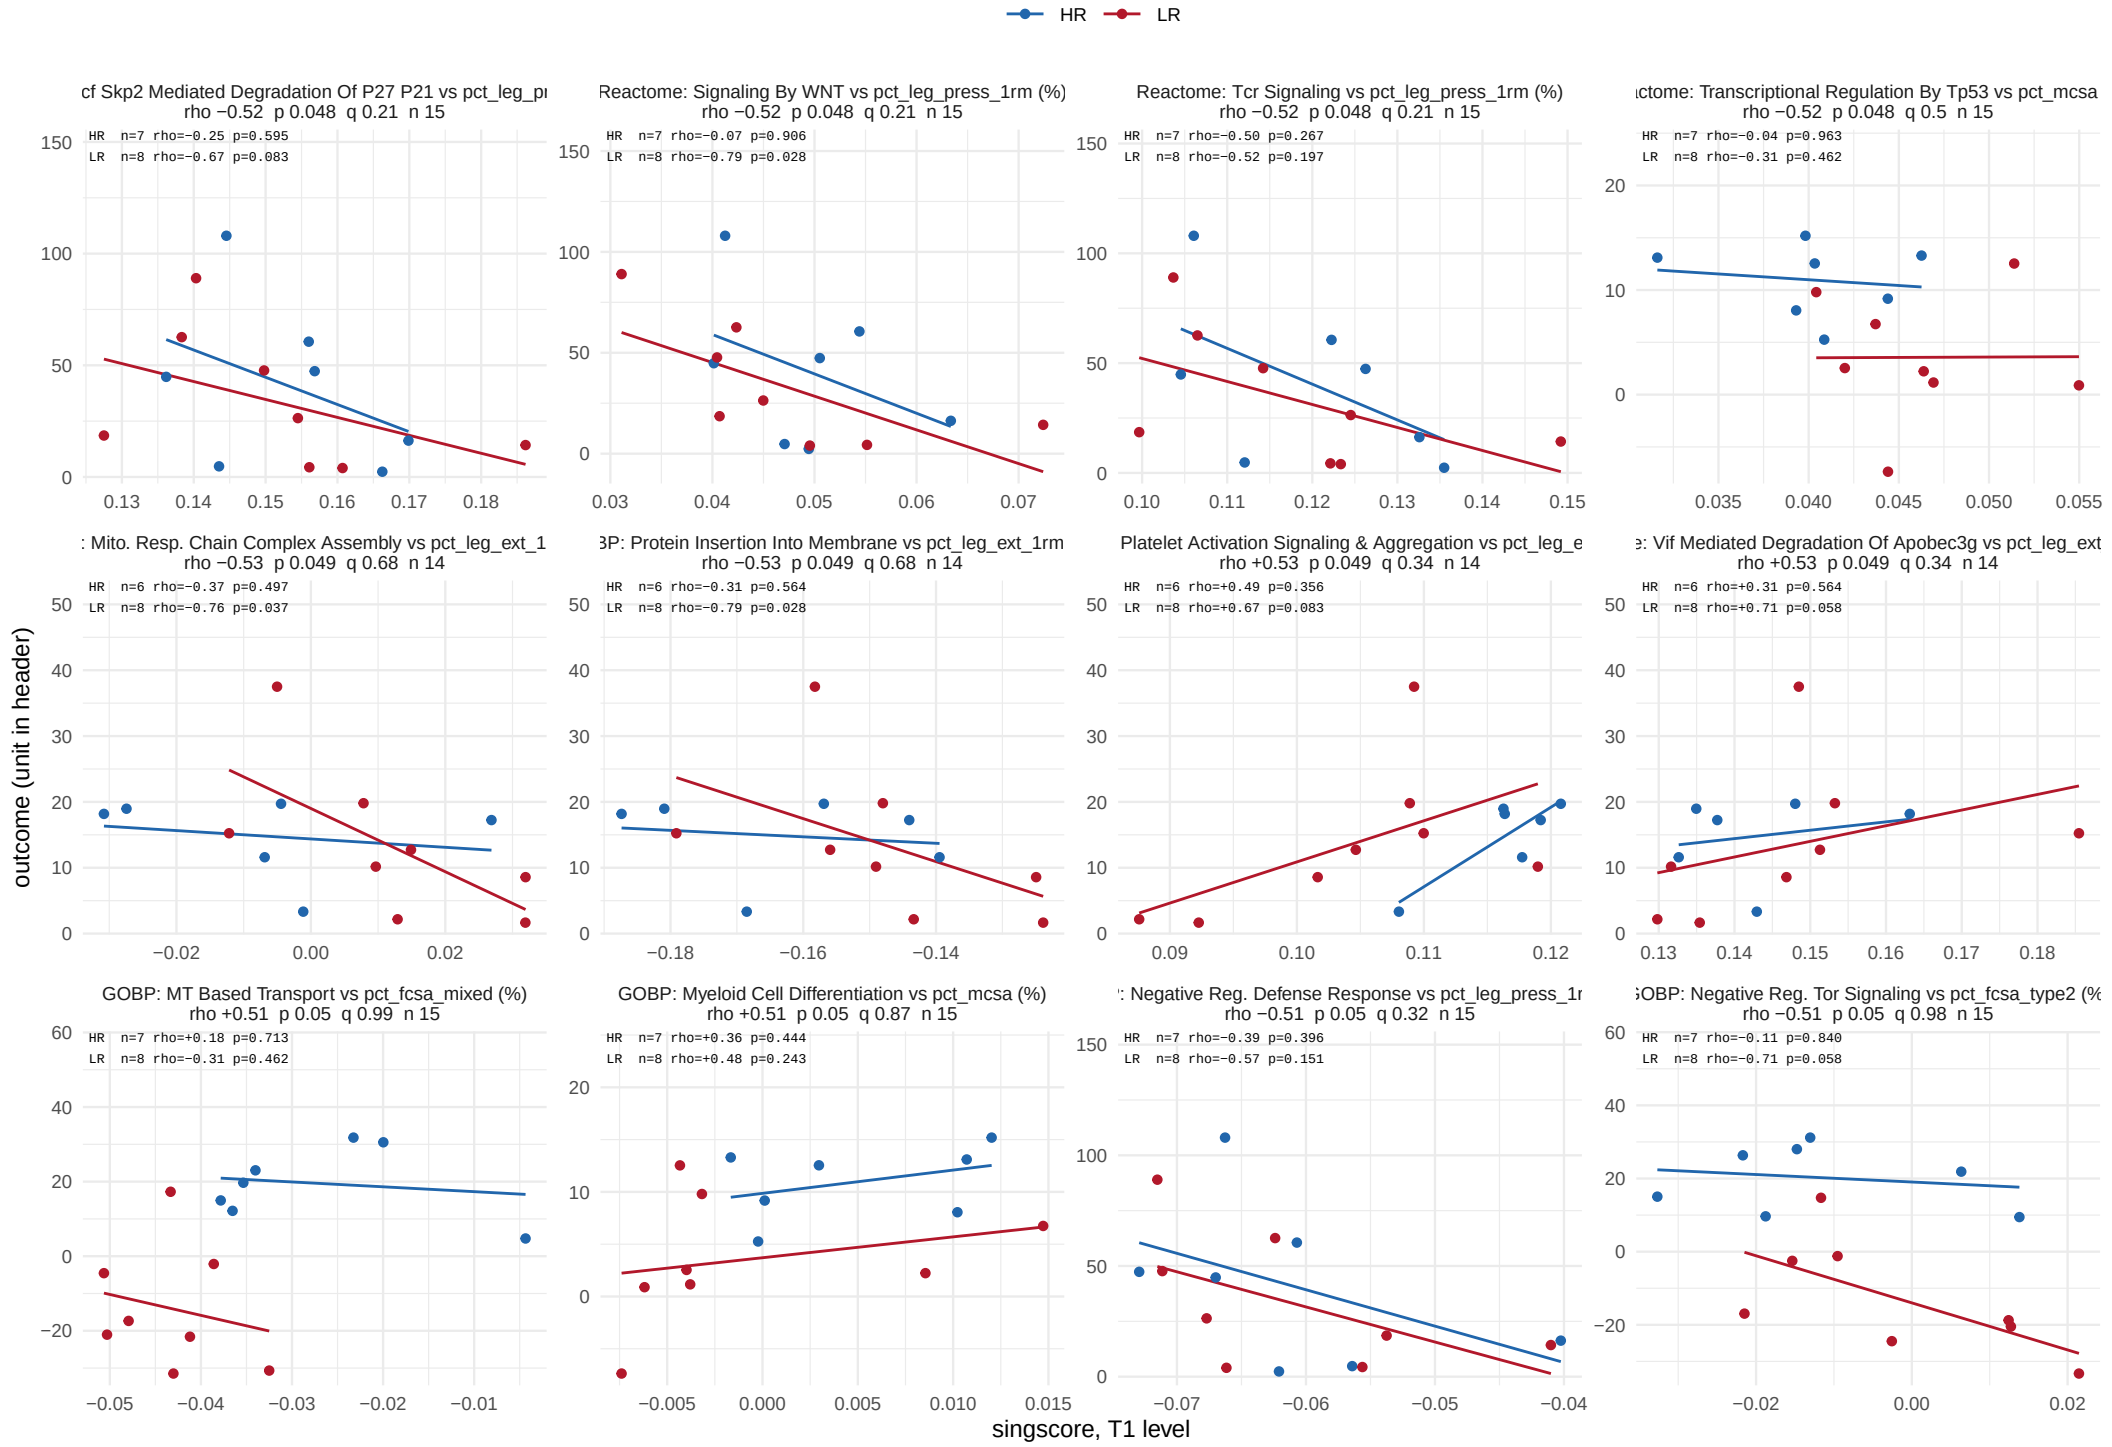


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, baseline window


626 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 52 of 53.

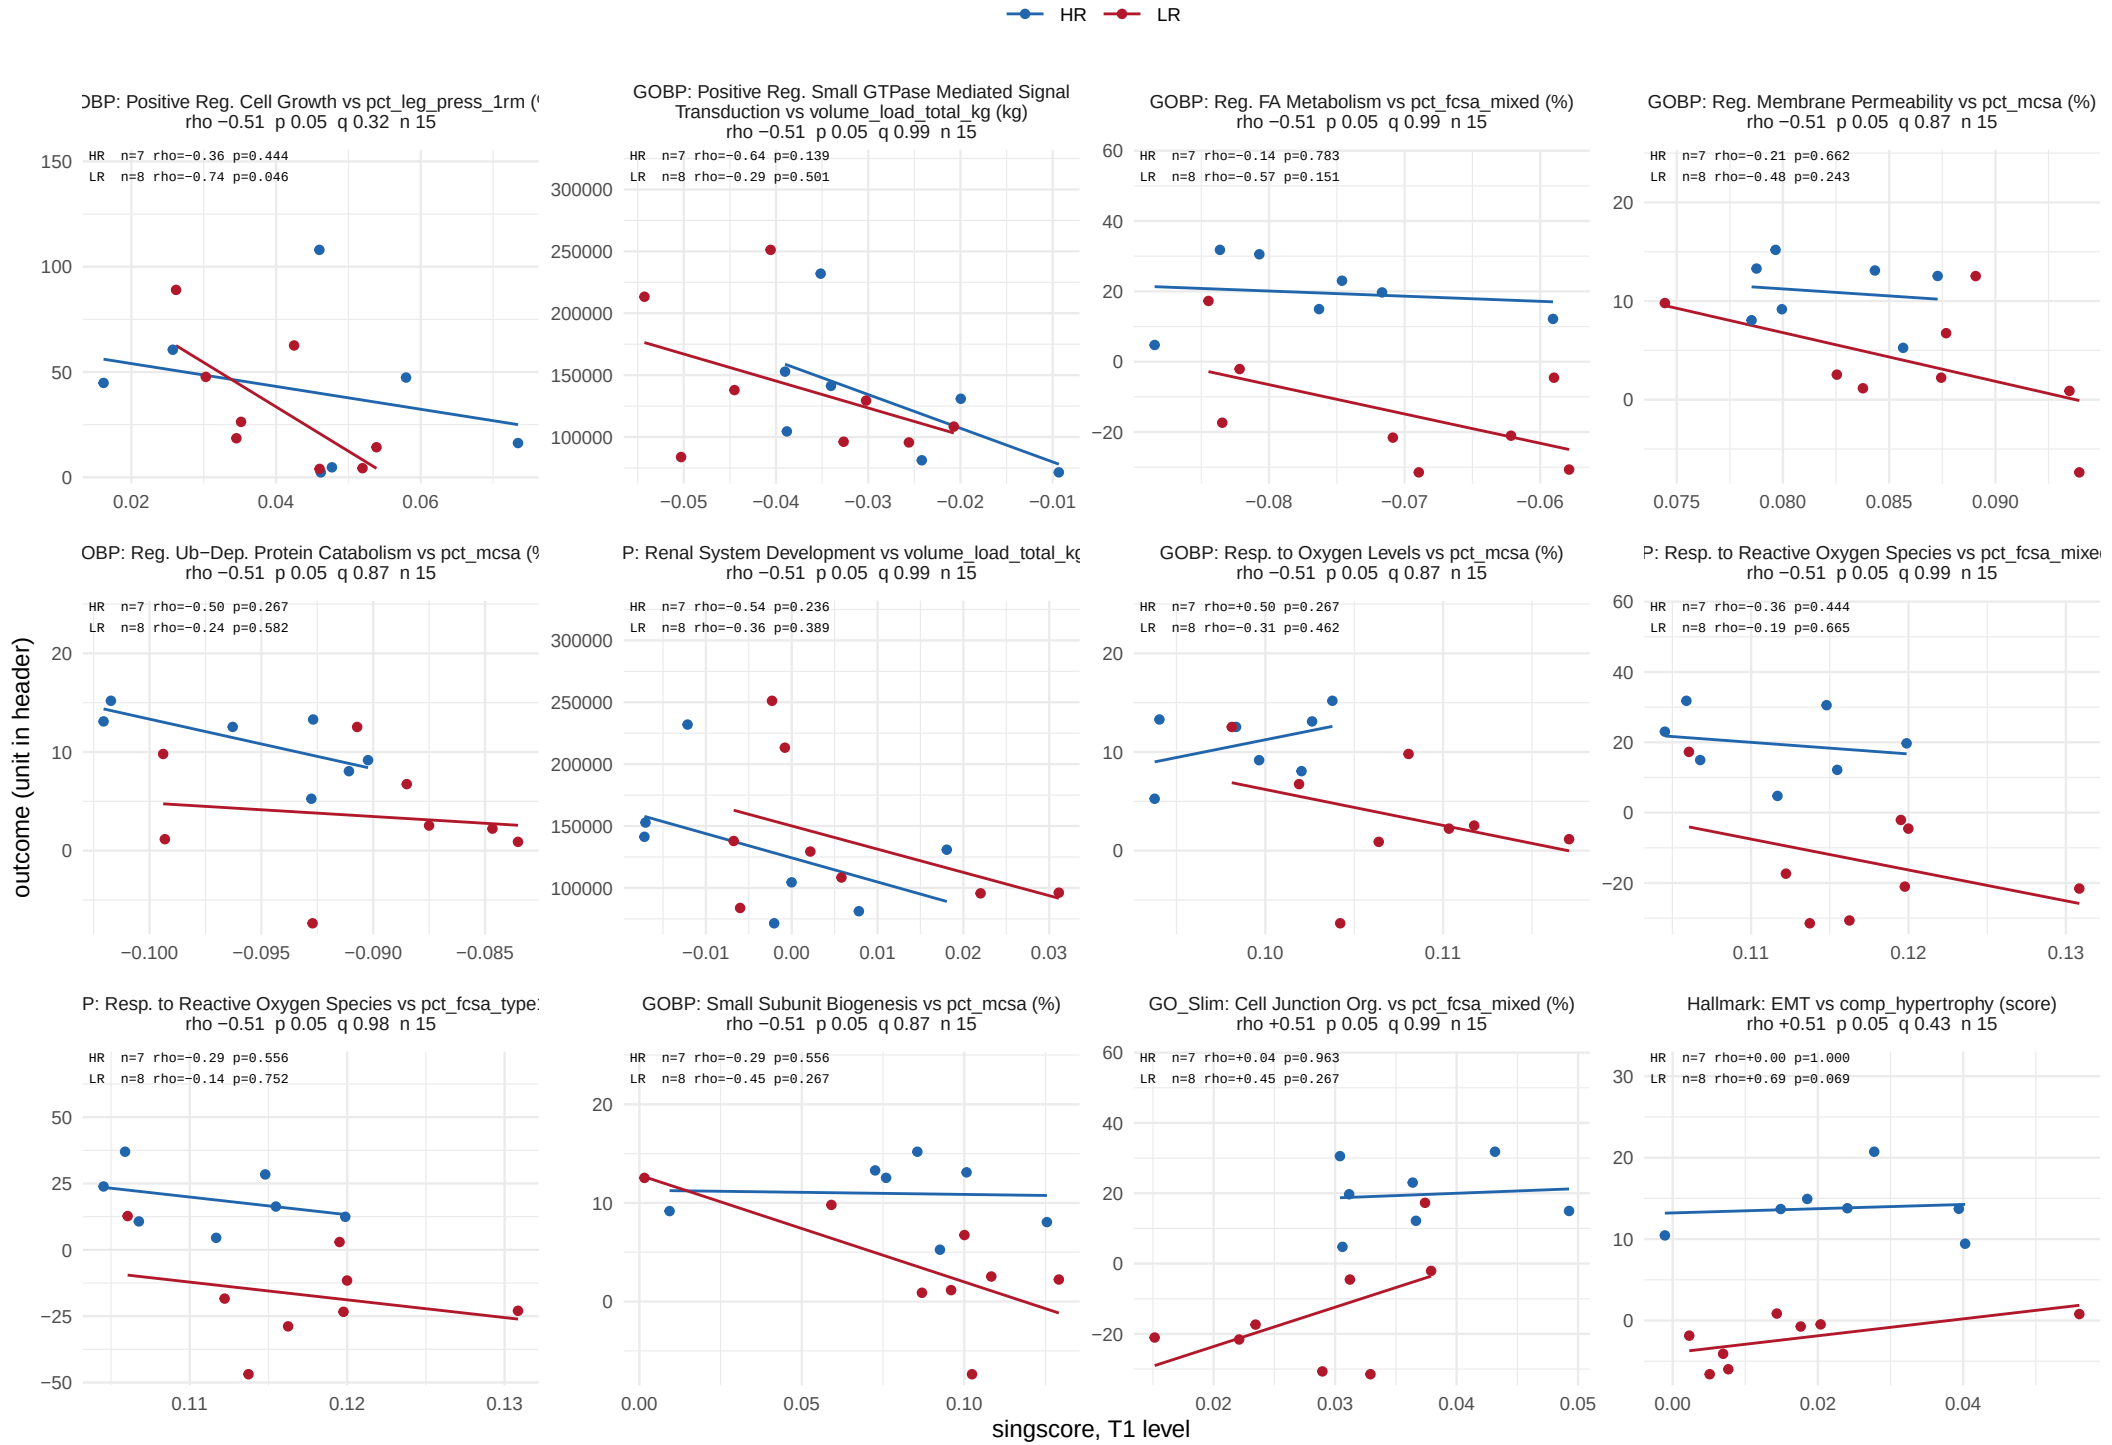


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

# Change score, baseline window

626 of 11024 feature−outcome pairs at p < 0.05, 1 at BH < 0.05. Page 53 of 53.

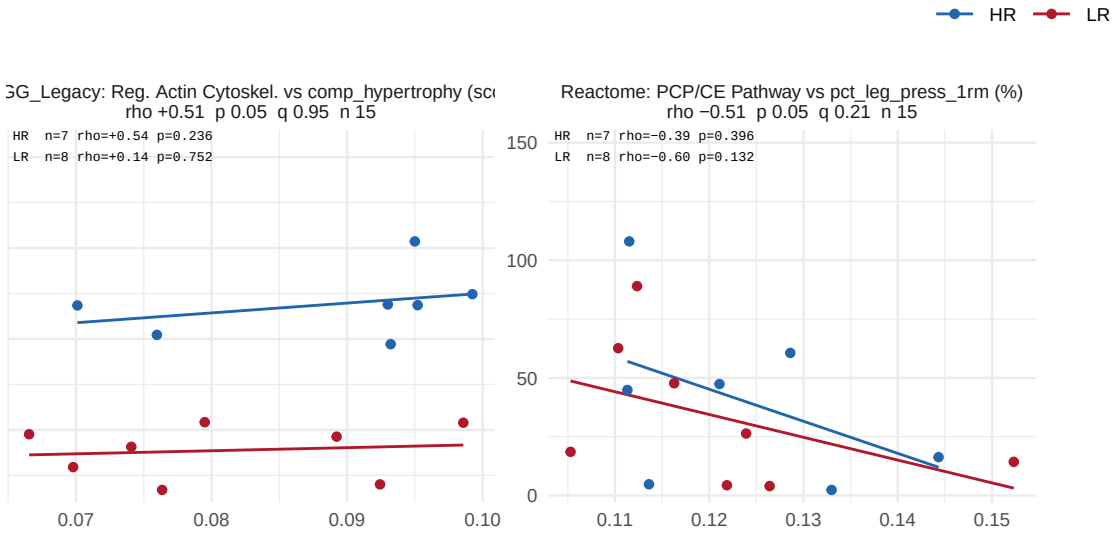



outcome (unit in header)

singscore, T1 level

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, acute window


573 of 11024 feature−outcome pairs at p < 0.05, 4 at BH < 0.05. Page 1 of 48.

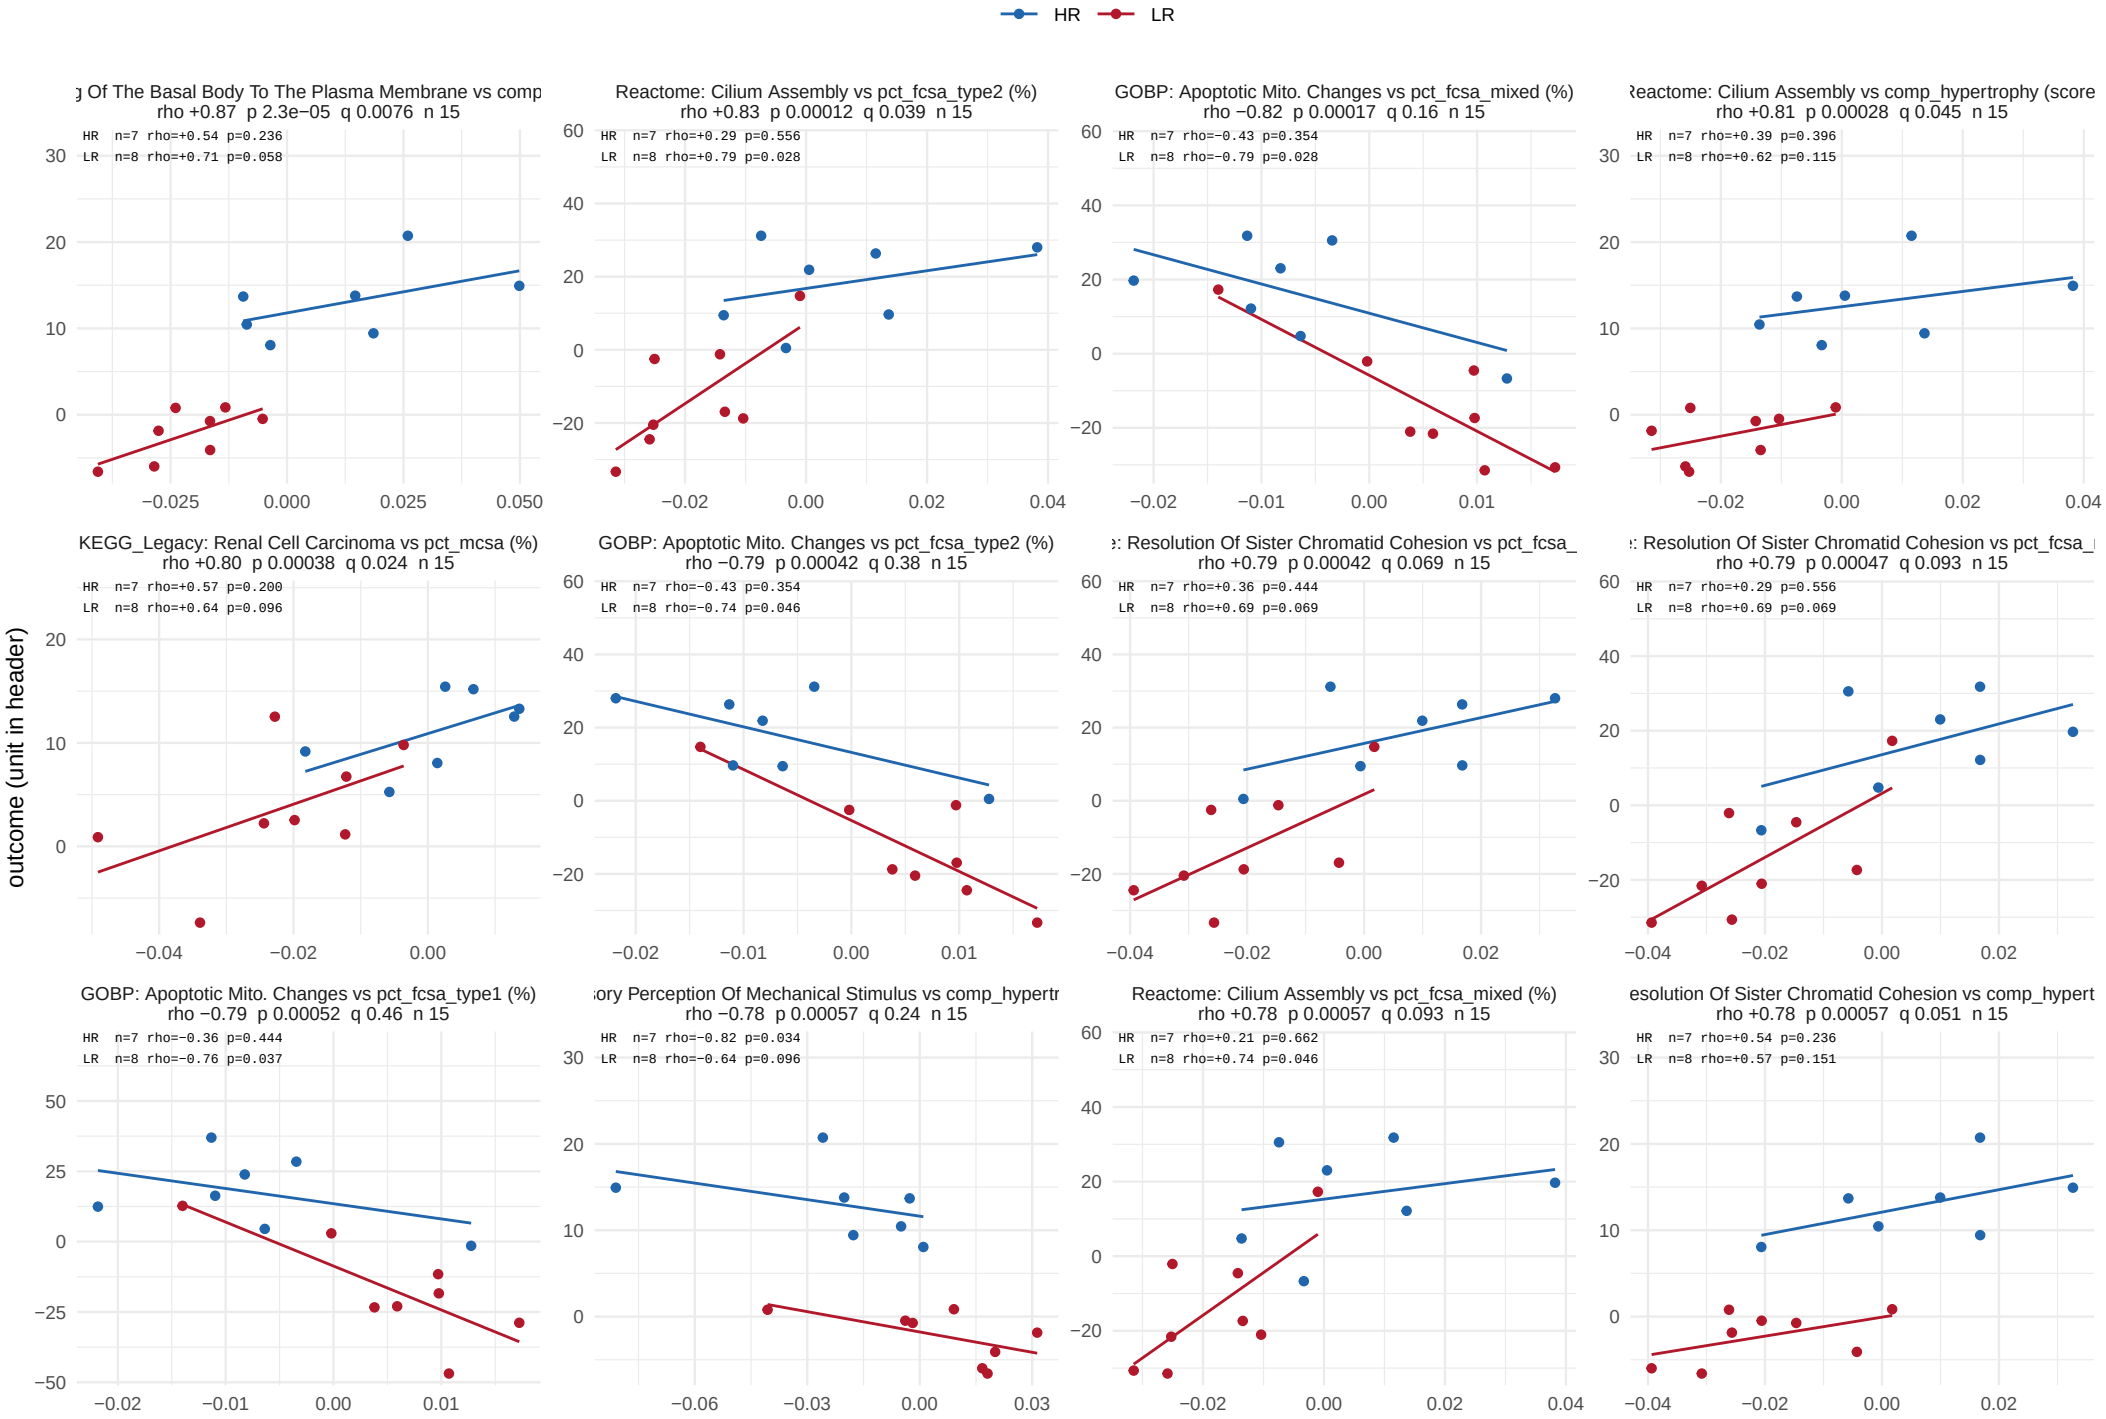


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, acute window


573 of 11024 feature−outcome pairs at p < 0.05, 4 at BH < 0.05. Page 2 of 48.

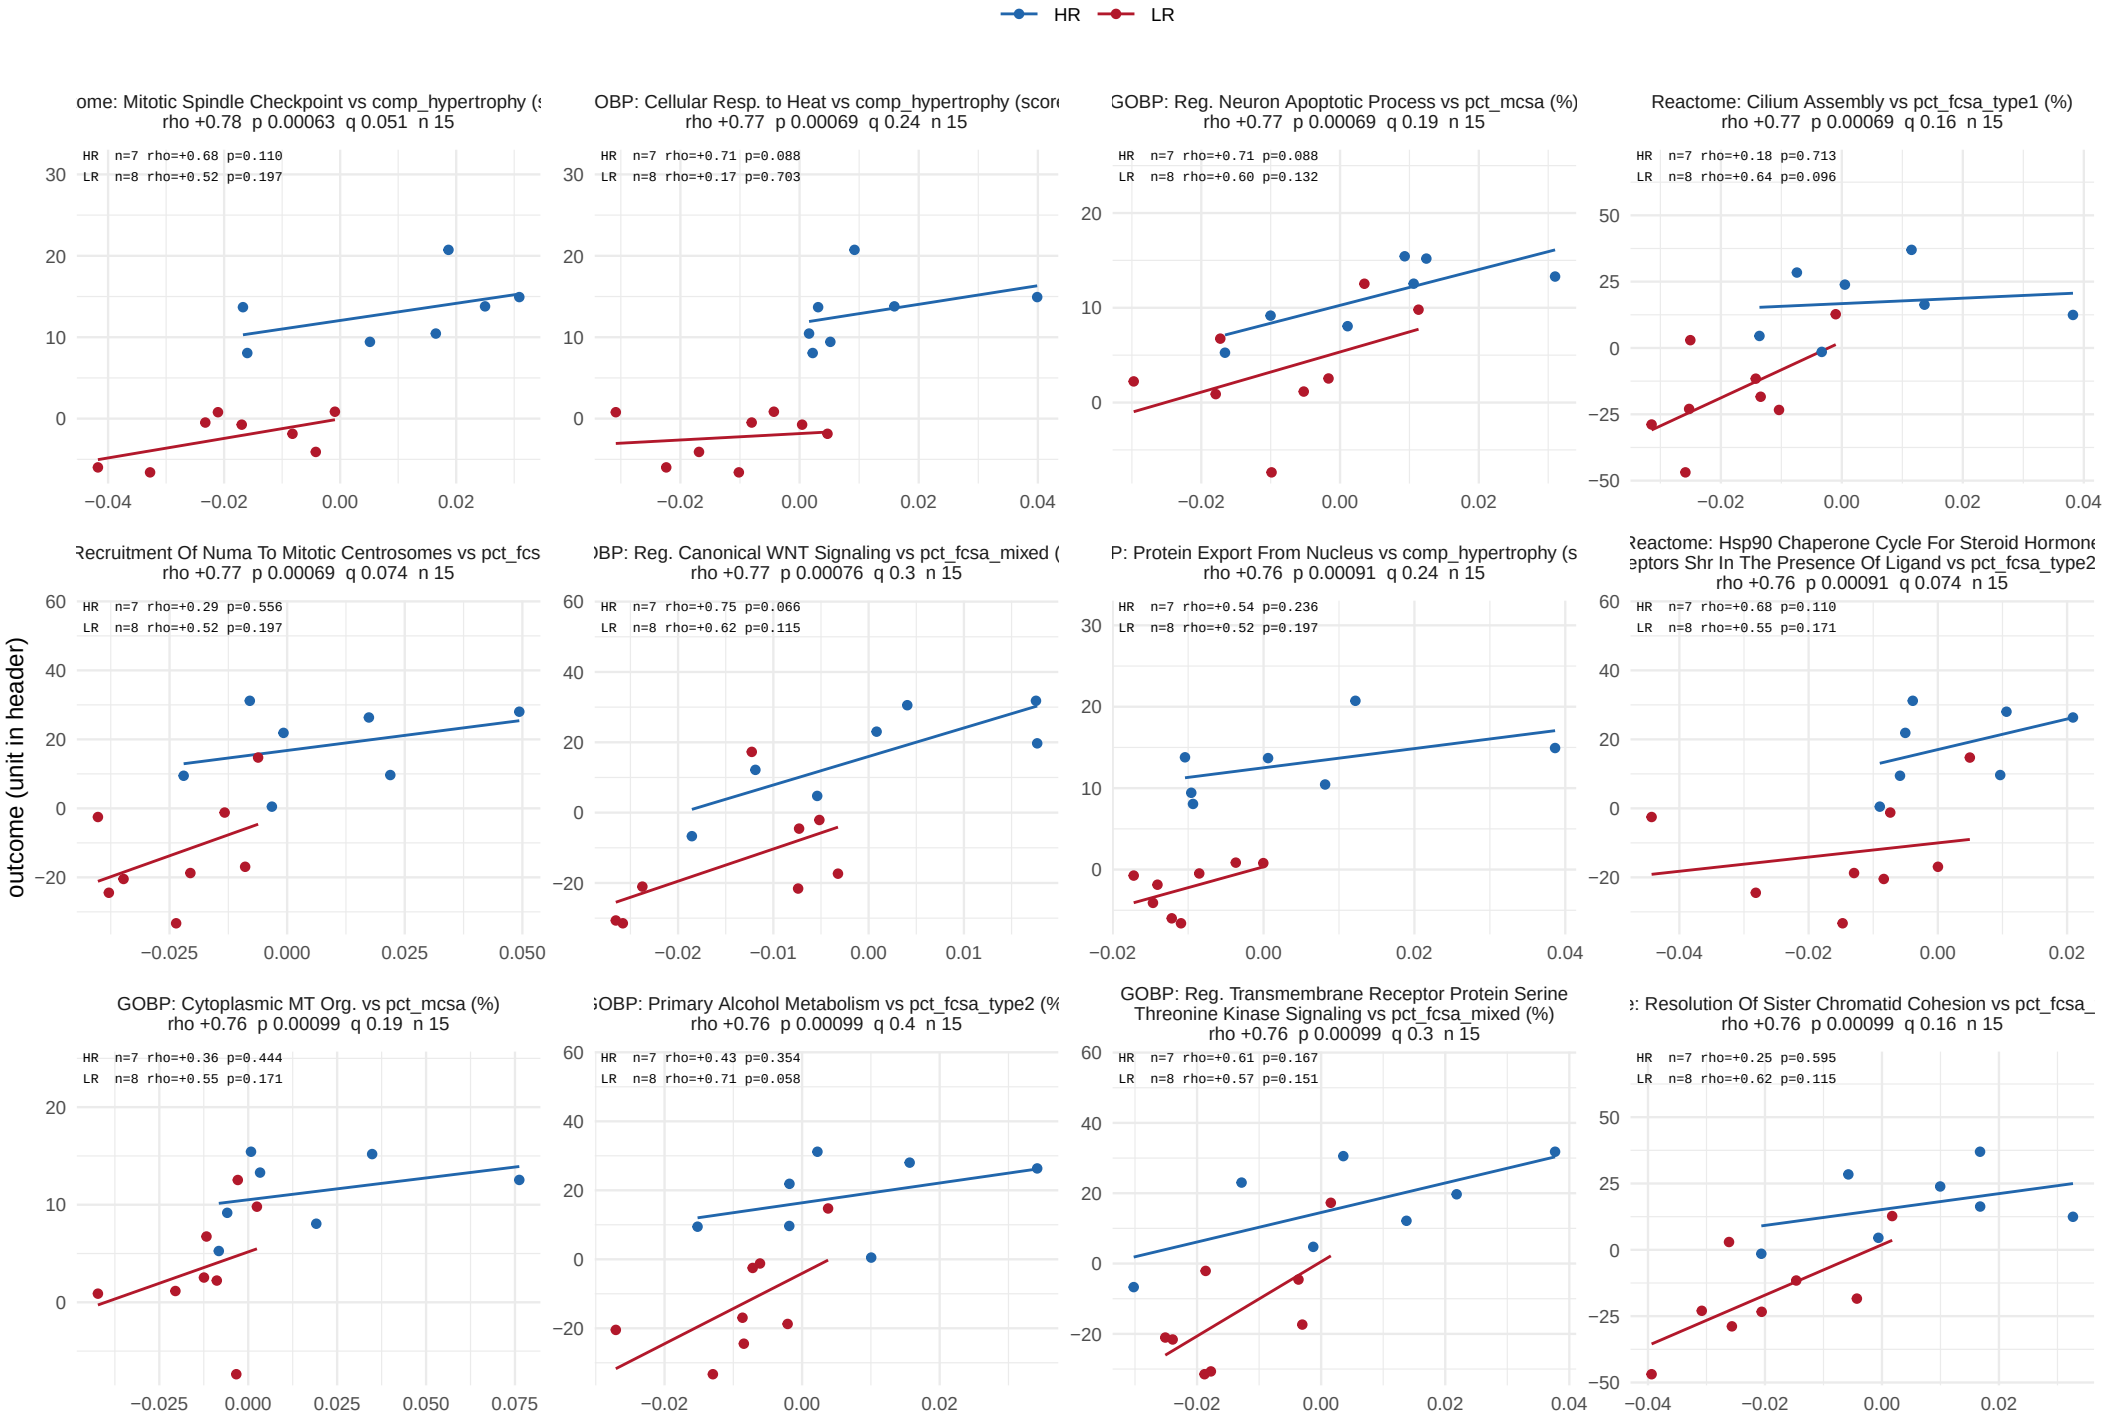


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, acute window


573 of 11024 feature−outcome pairs at p < 0.05, 4 at BH < 0.05. Page 3 of 48.

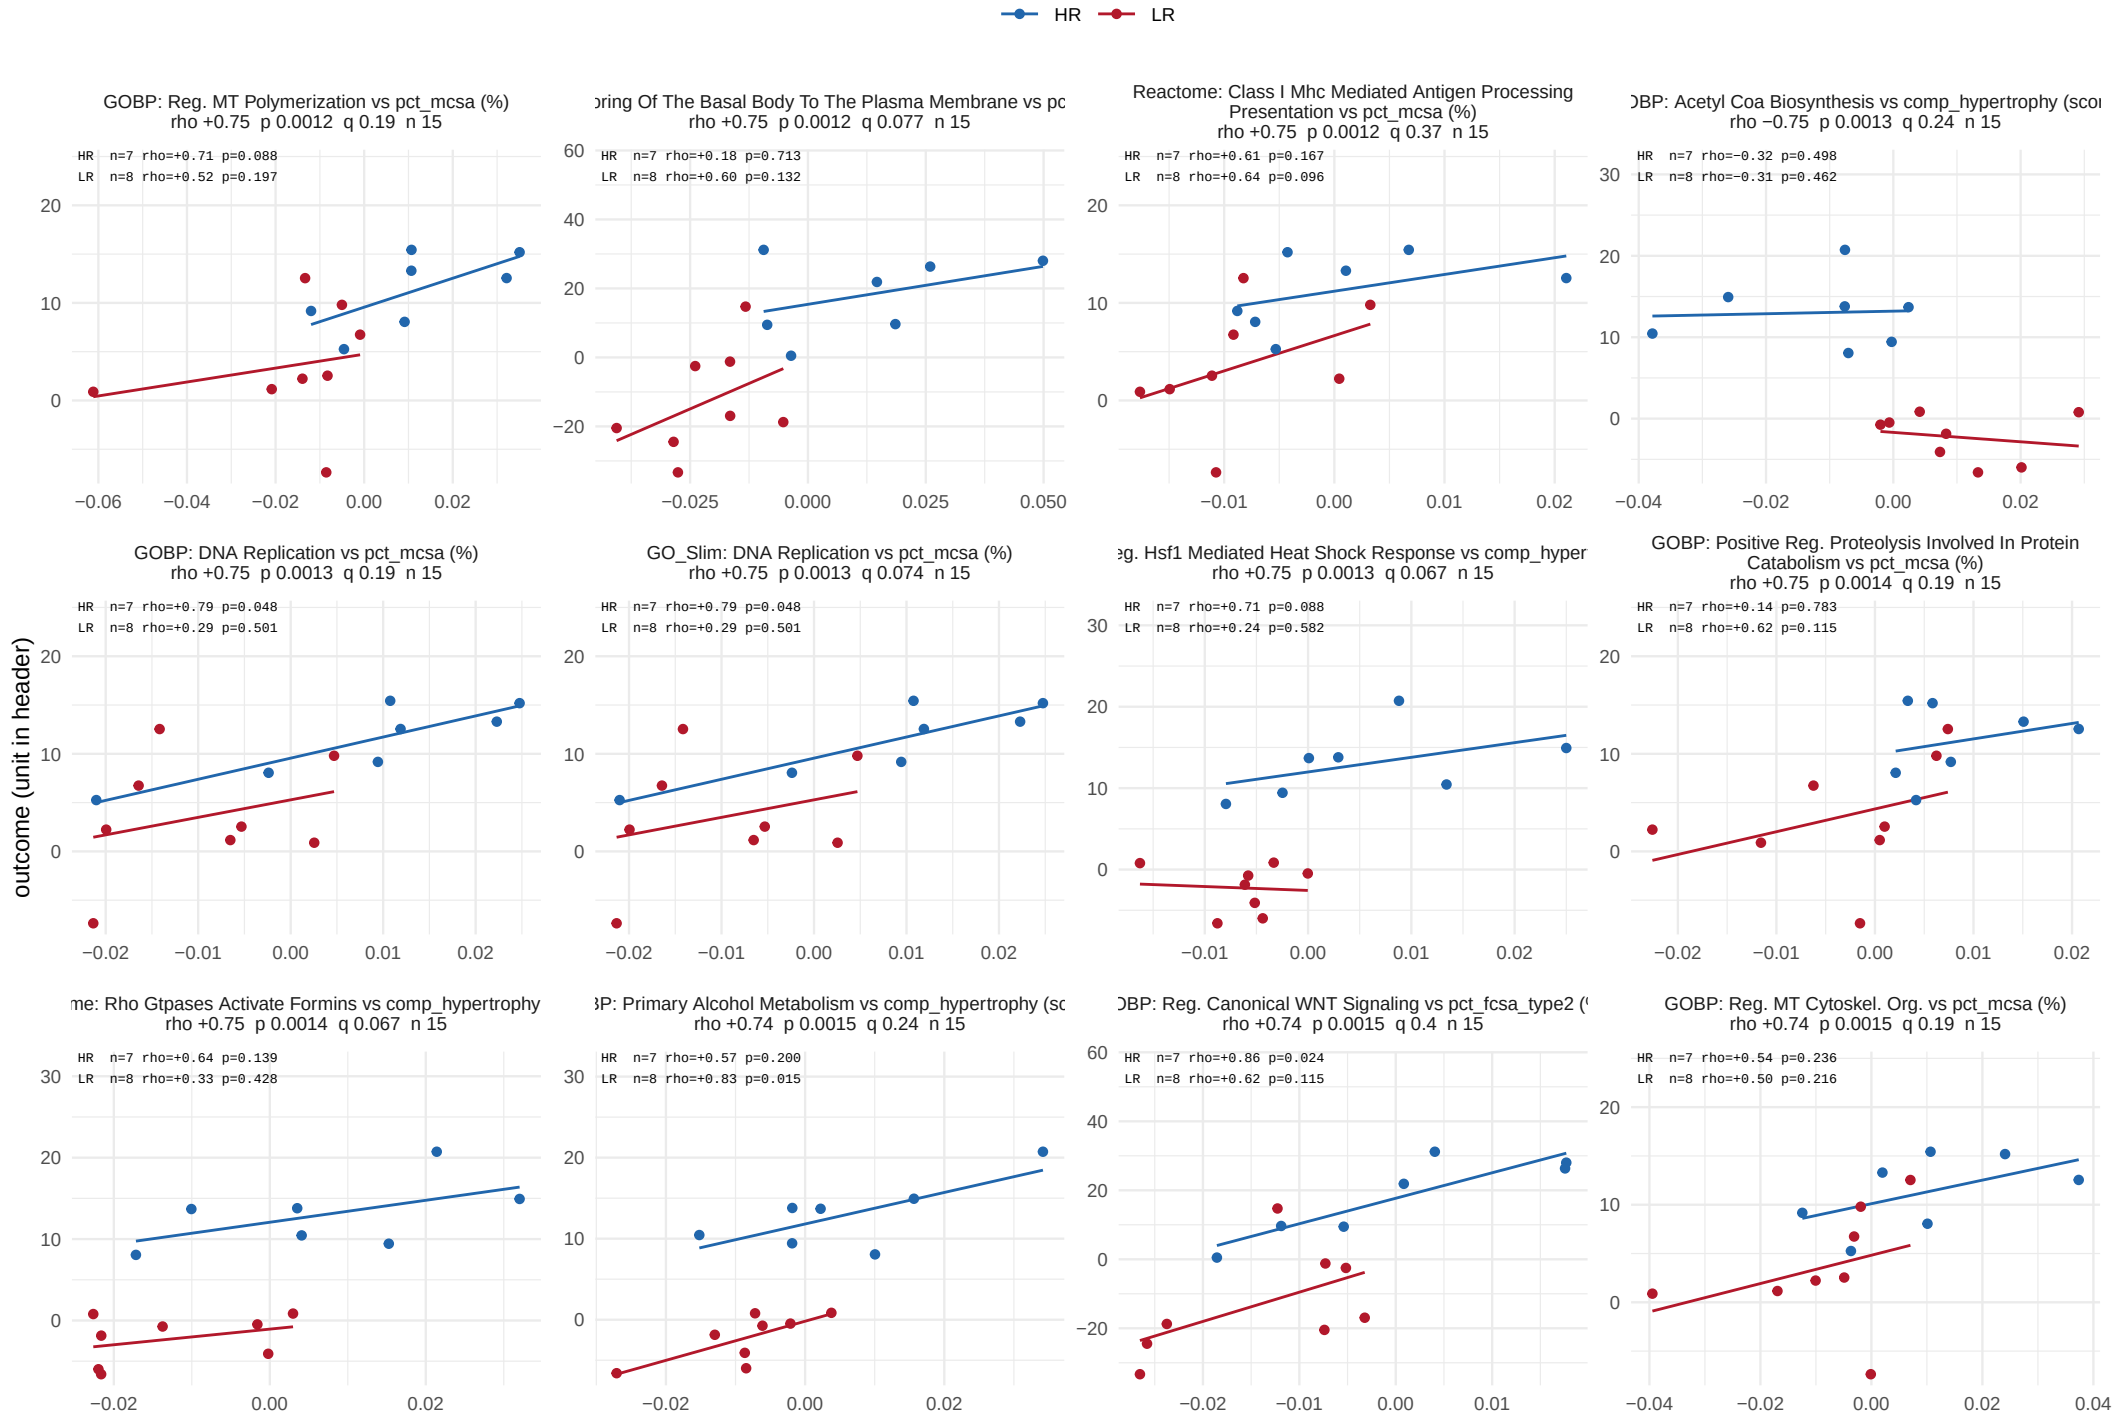


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

# Change score, acute window


573 of 11024 feature−outcome pairs at p < 0.05, 4 at BH < 0.05. Page 4 of 48.

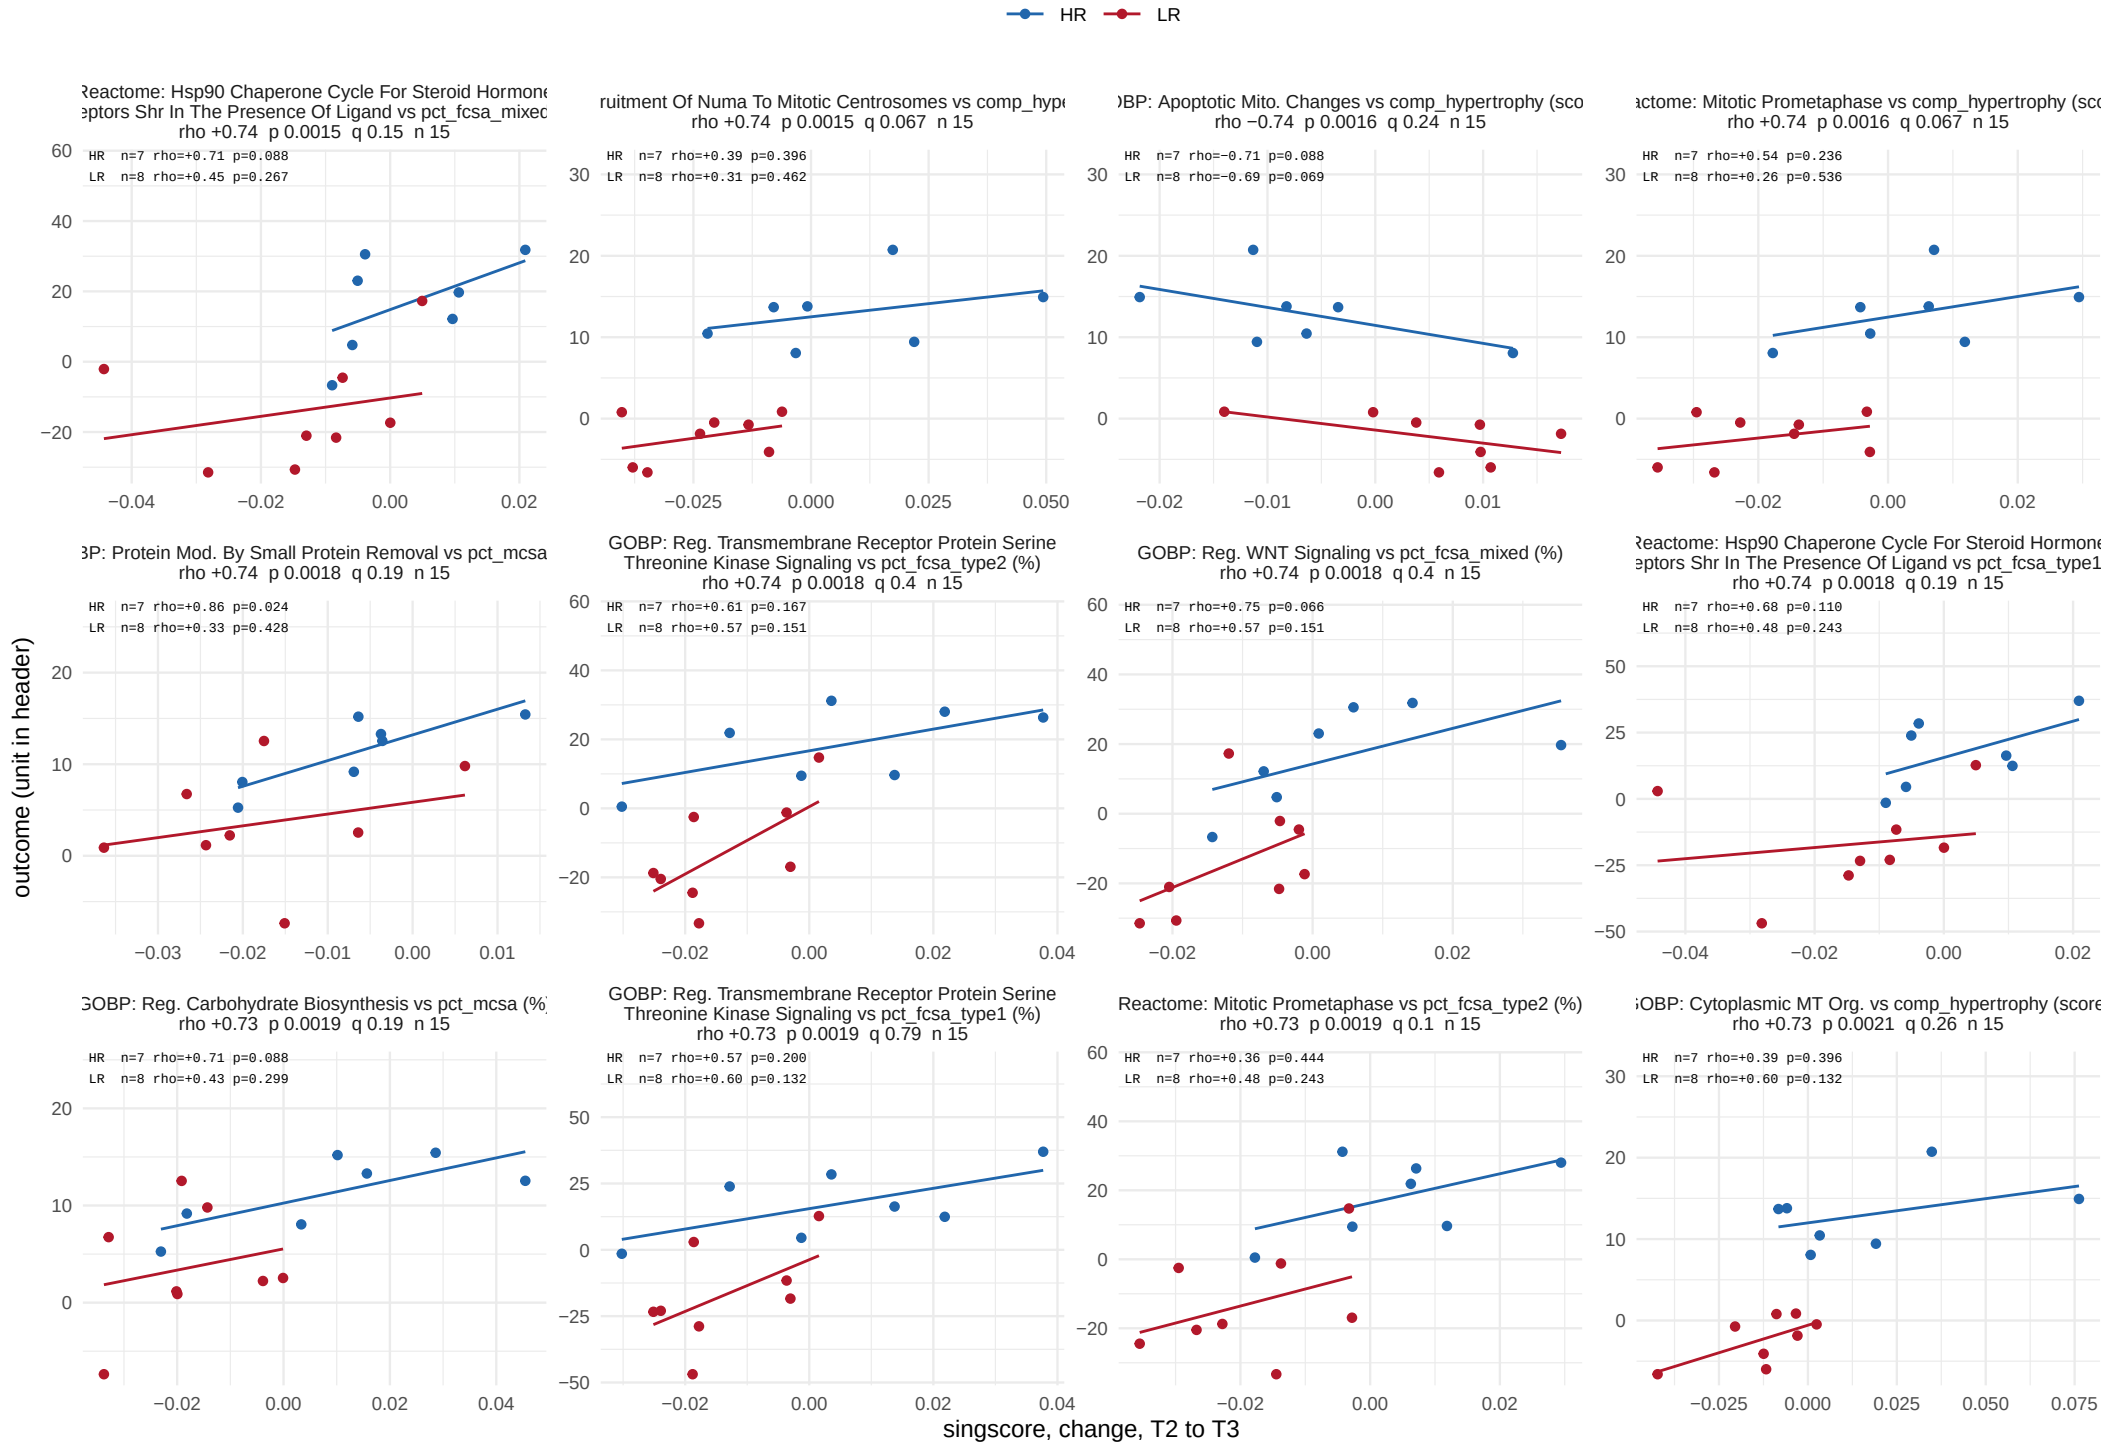


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, acute window


573 of 11024 feature−outcome pairs at p < 0.05, 4 at BH < 0.05. Page 5 of 48.

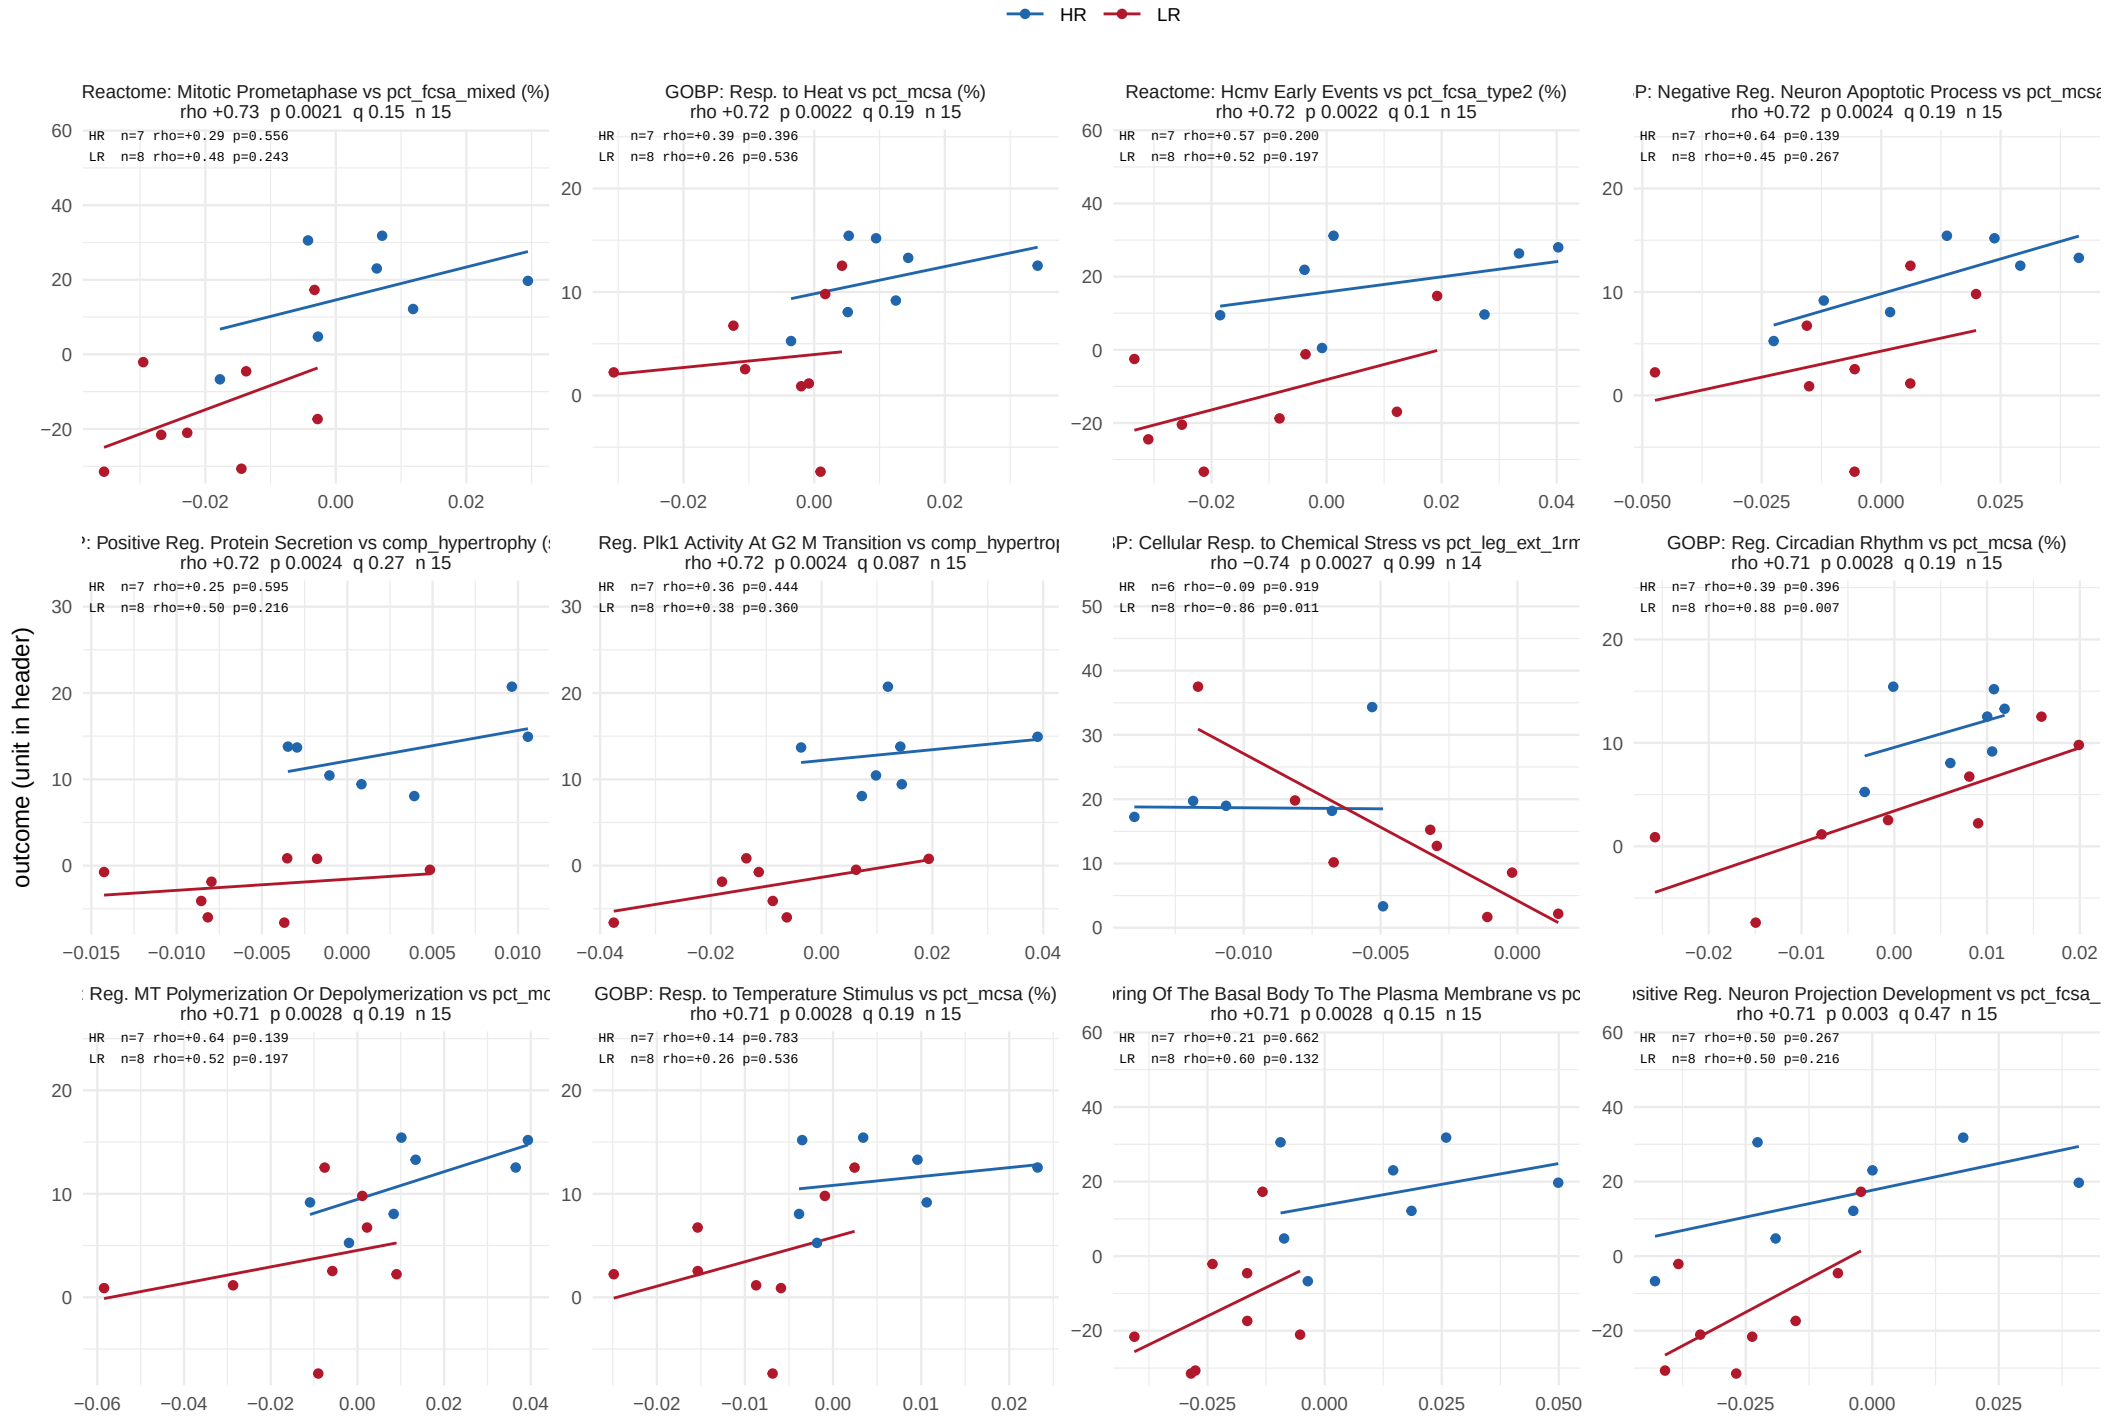


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, acute window


573 of 11024 feature−outcome pairs at p < 0.05, 4 at BH < 0.05. Page 6 of 48.

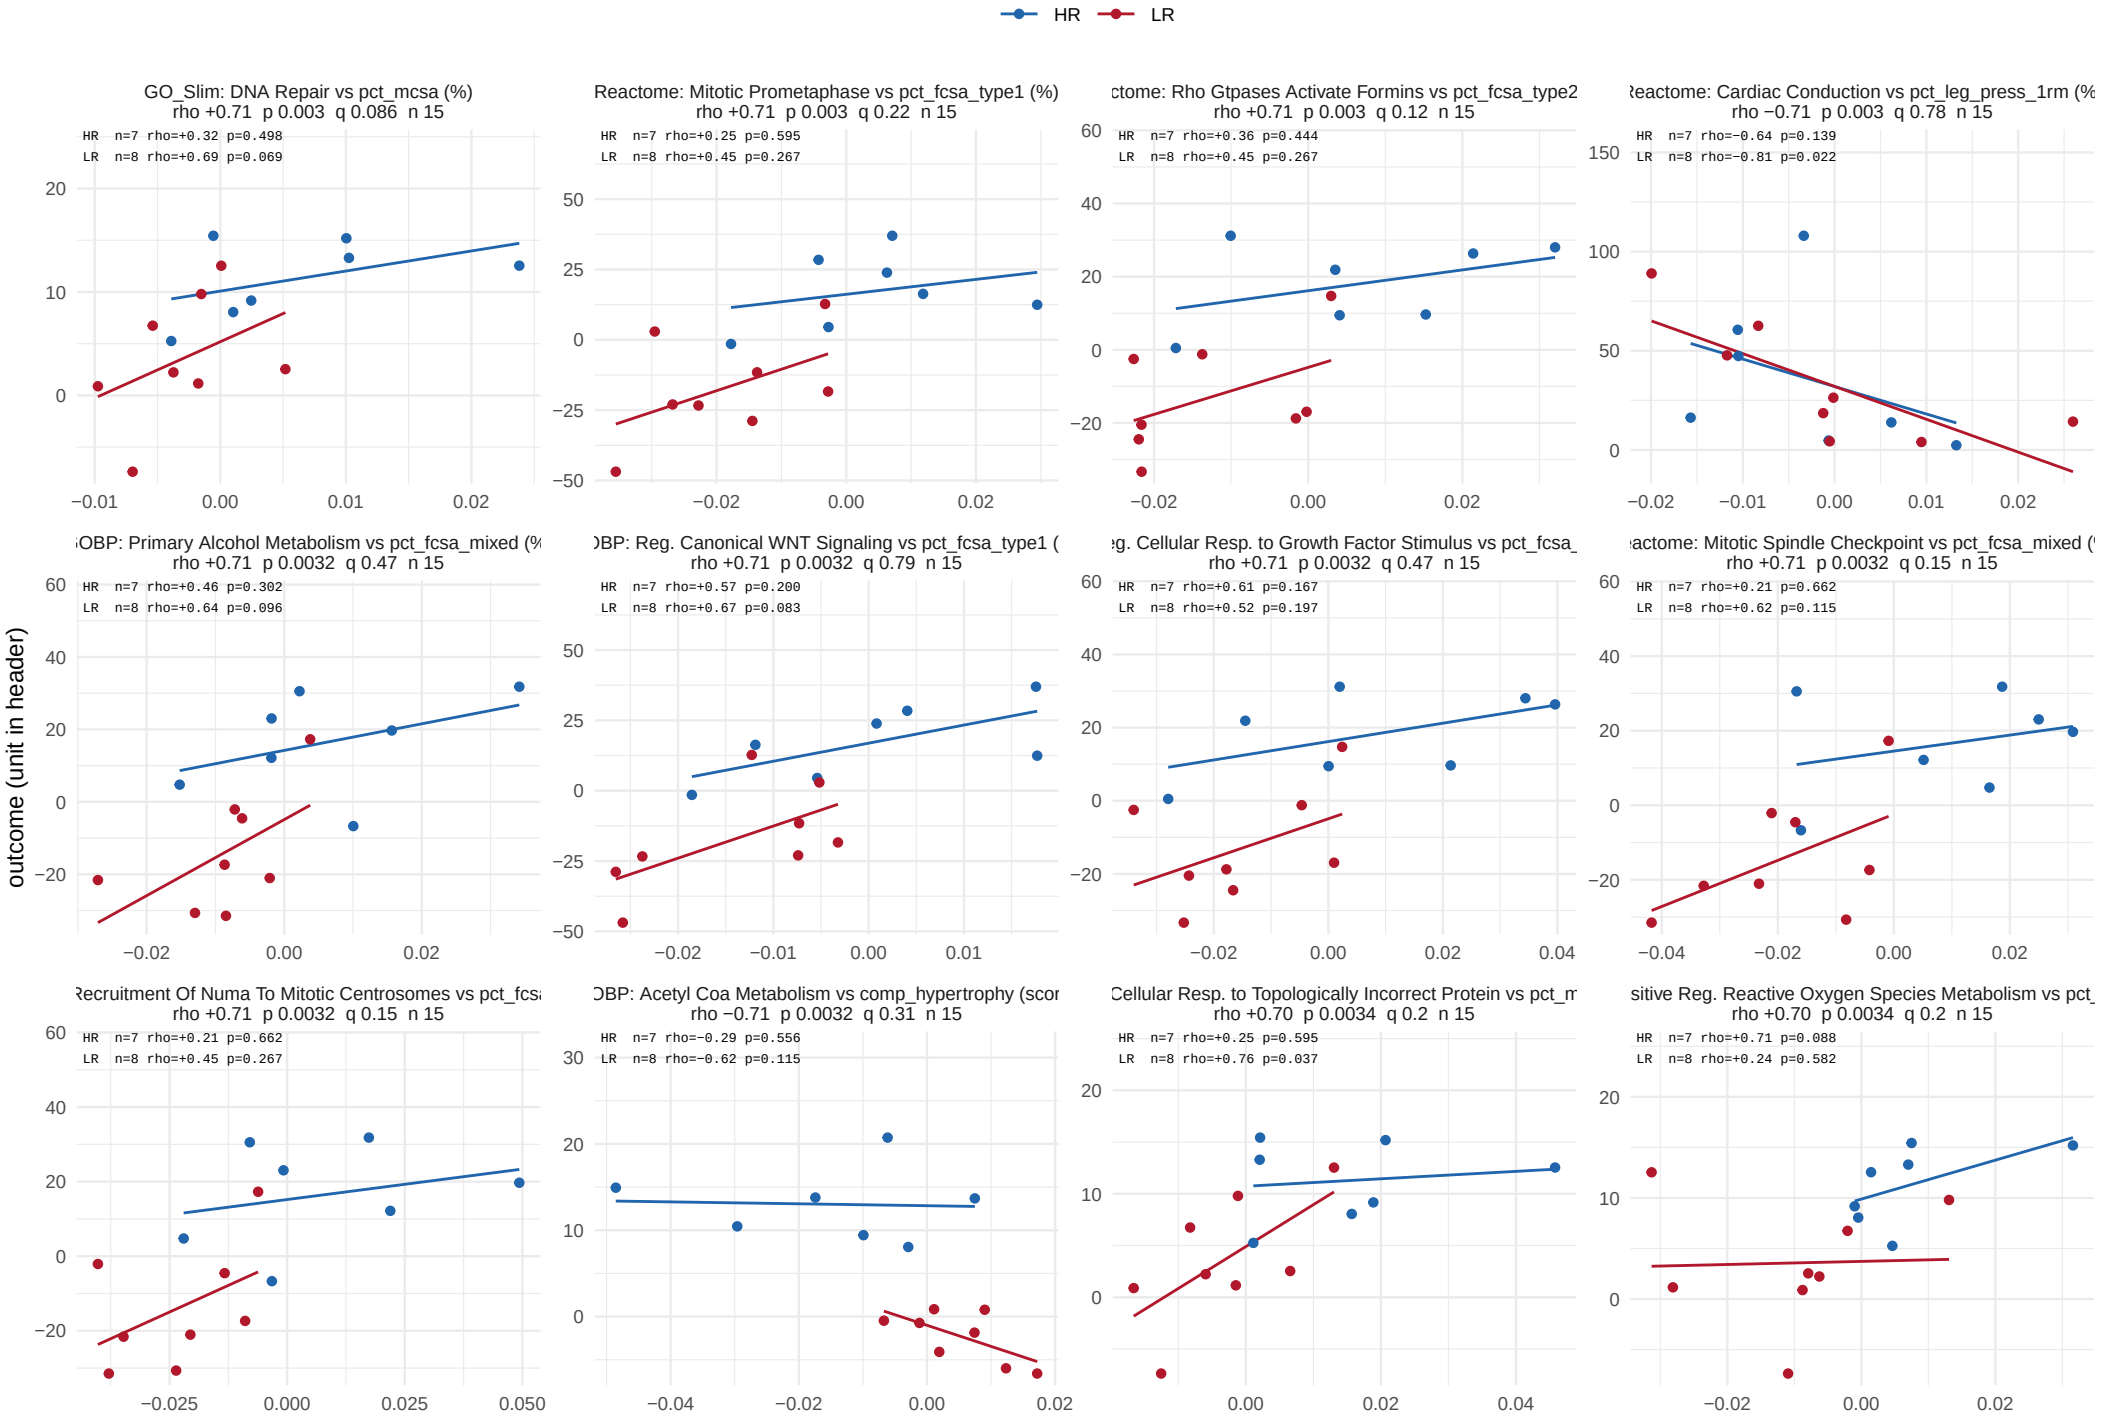


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, acute window


573 of 11024 feature−outcome pairs at p < 0.05, 4 at BH < 0.05. Page 7 of 48.

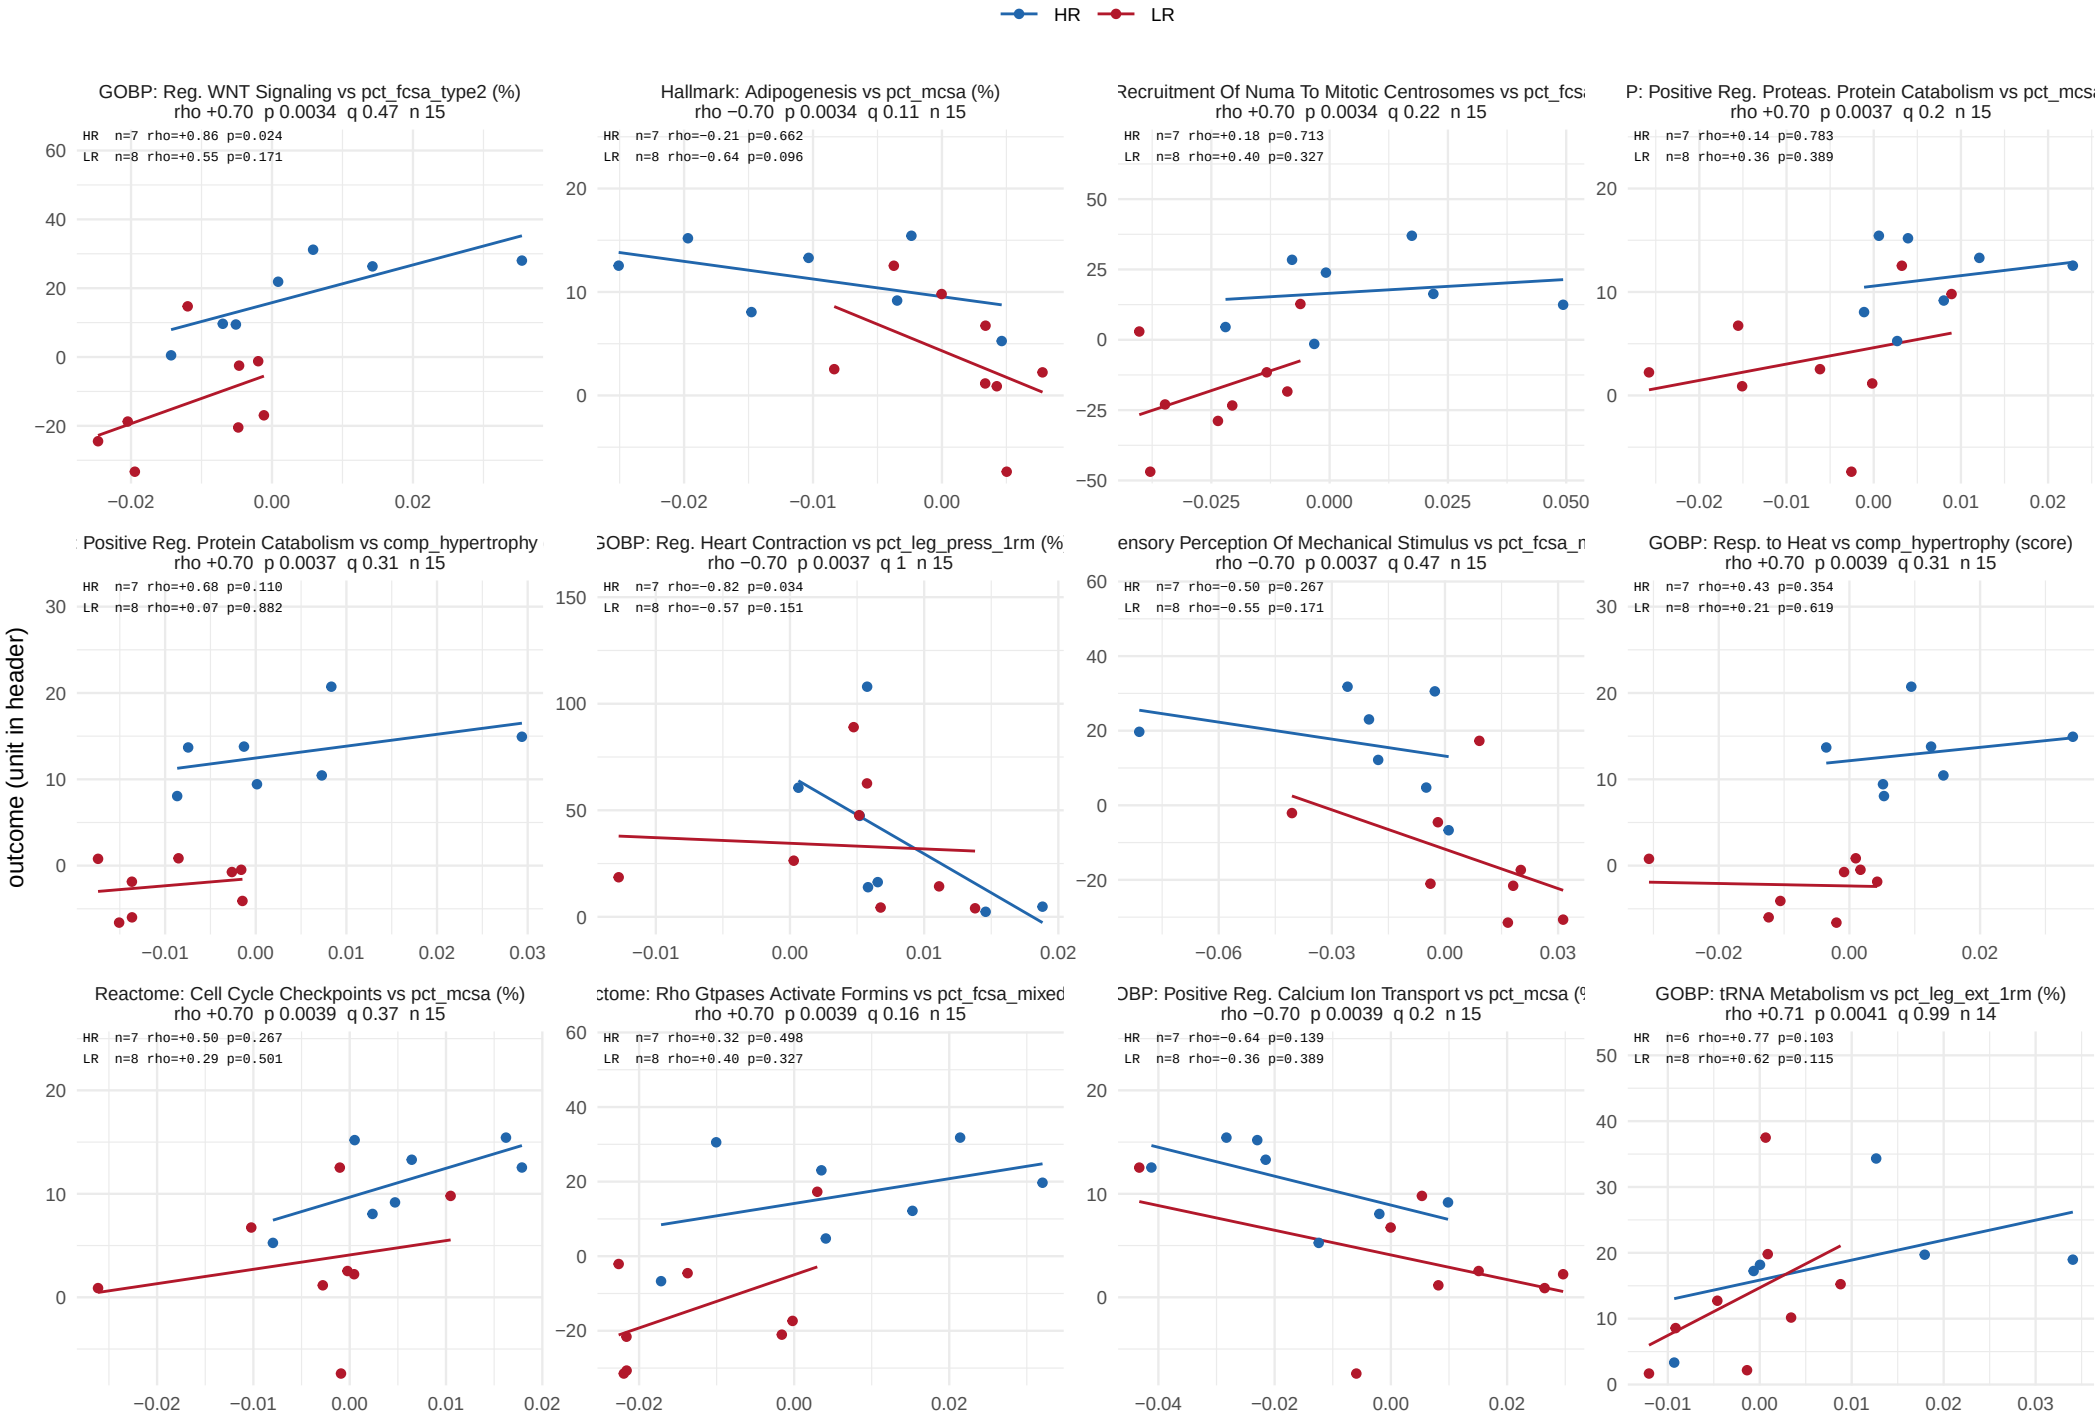


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, acute window


573 of 11024 feature−outcome pairs at p < 0.05, 4 at BH < 0.05. Page 8 of 48.

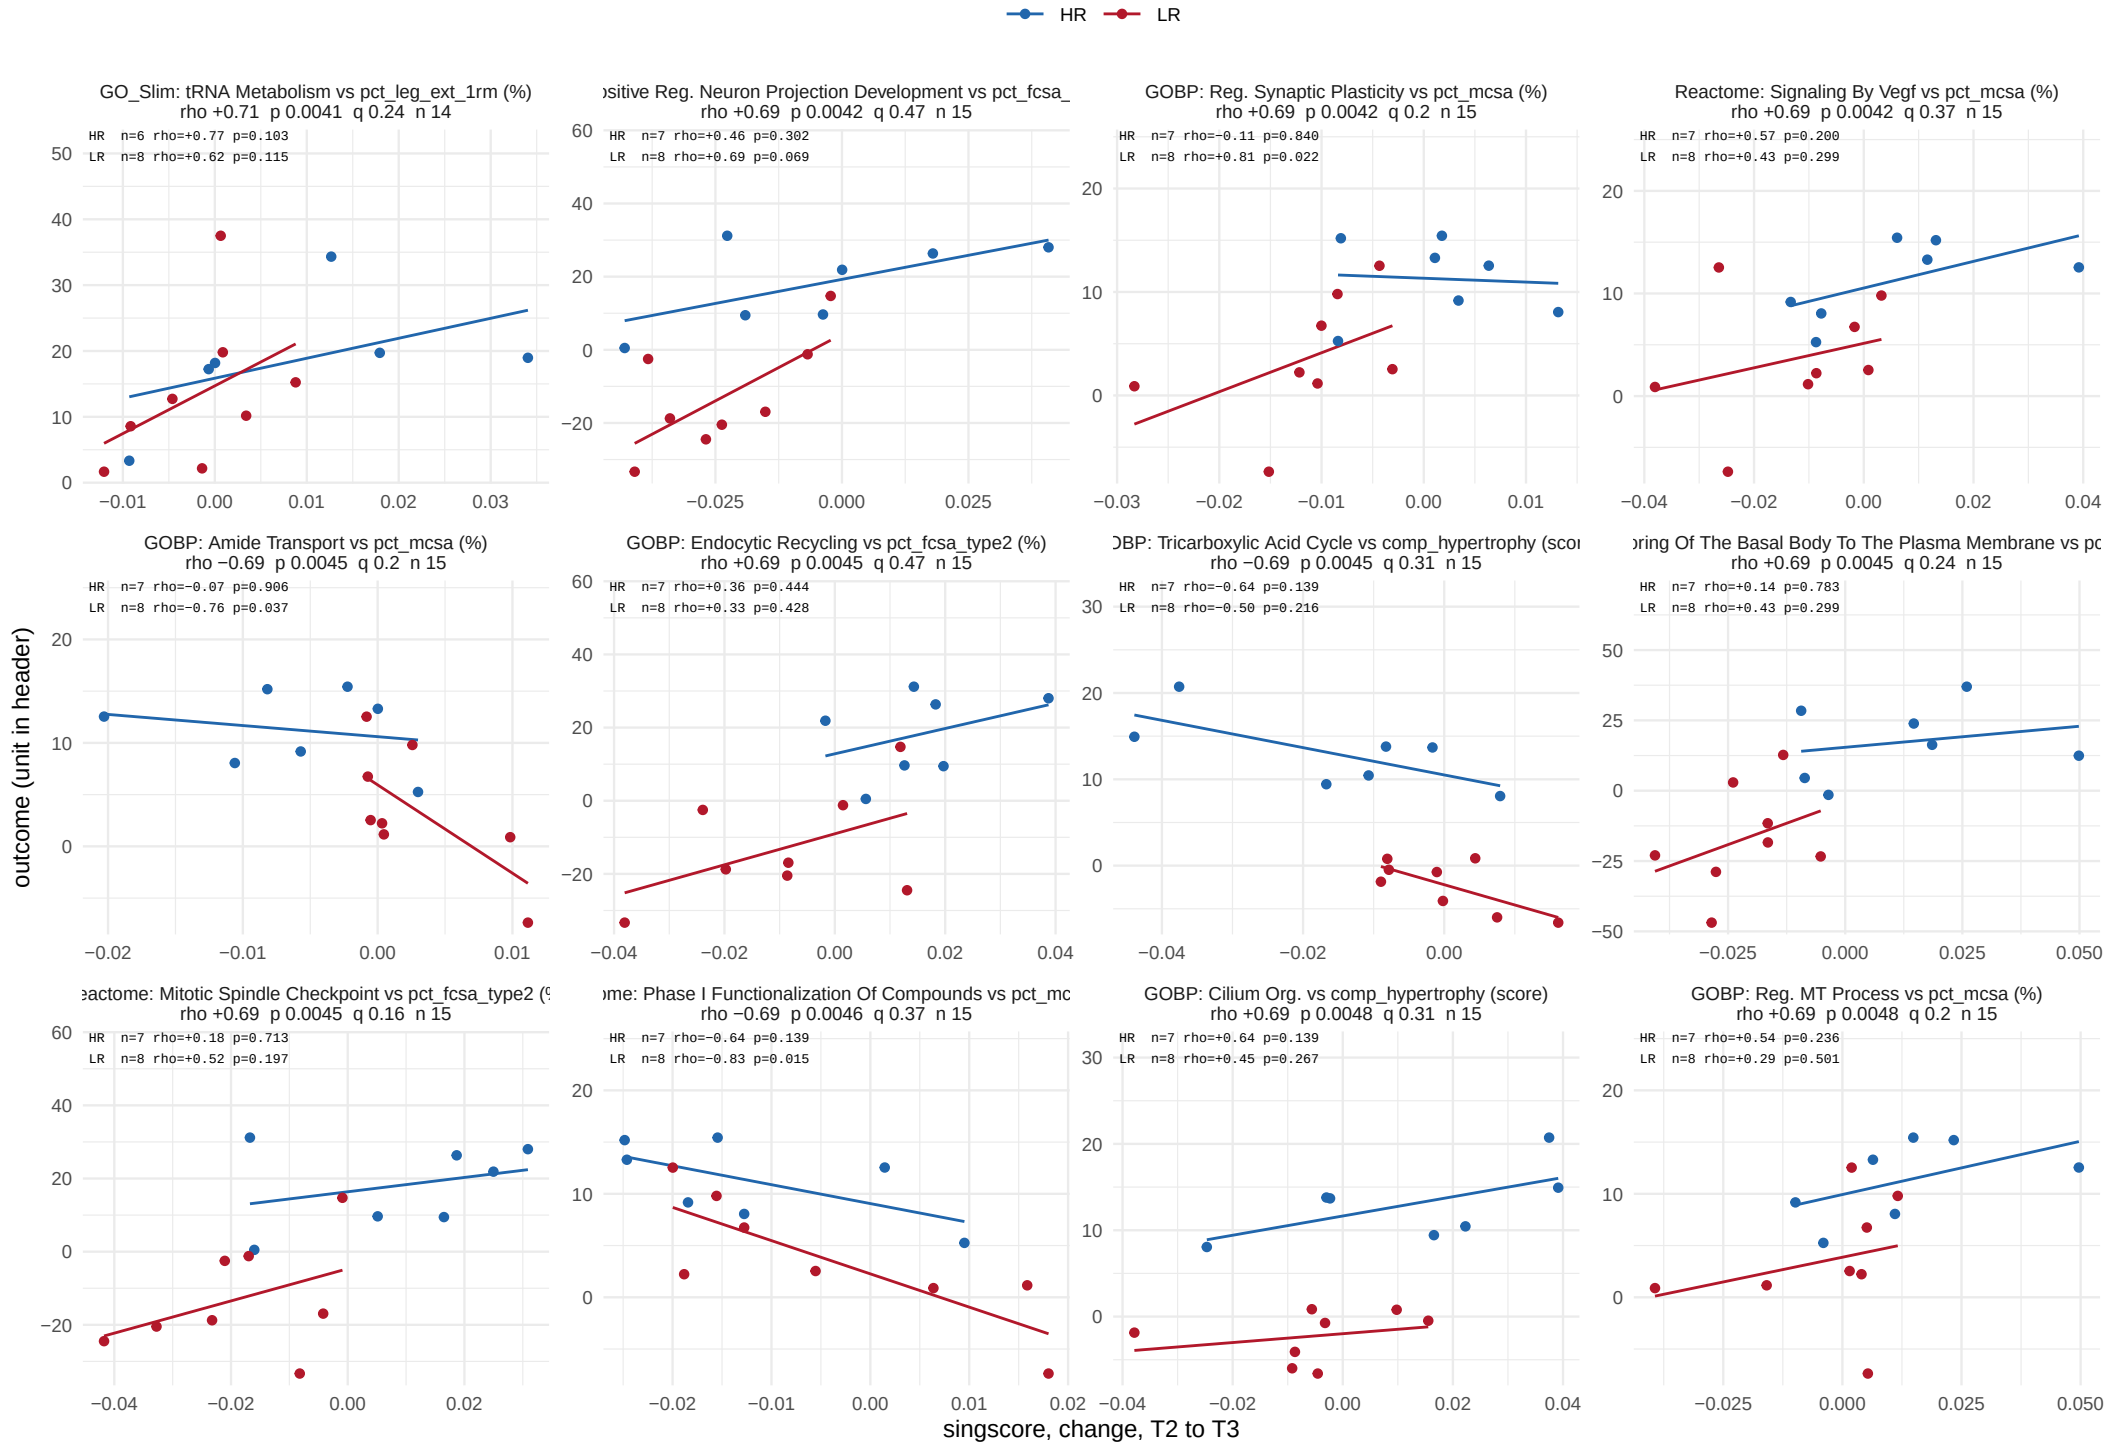


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

# Change score, acute window


573 of 11024 feature−outcome pairs at p < 0.05, 4 at BH < 0.05. Page 9 of 48.

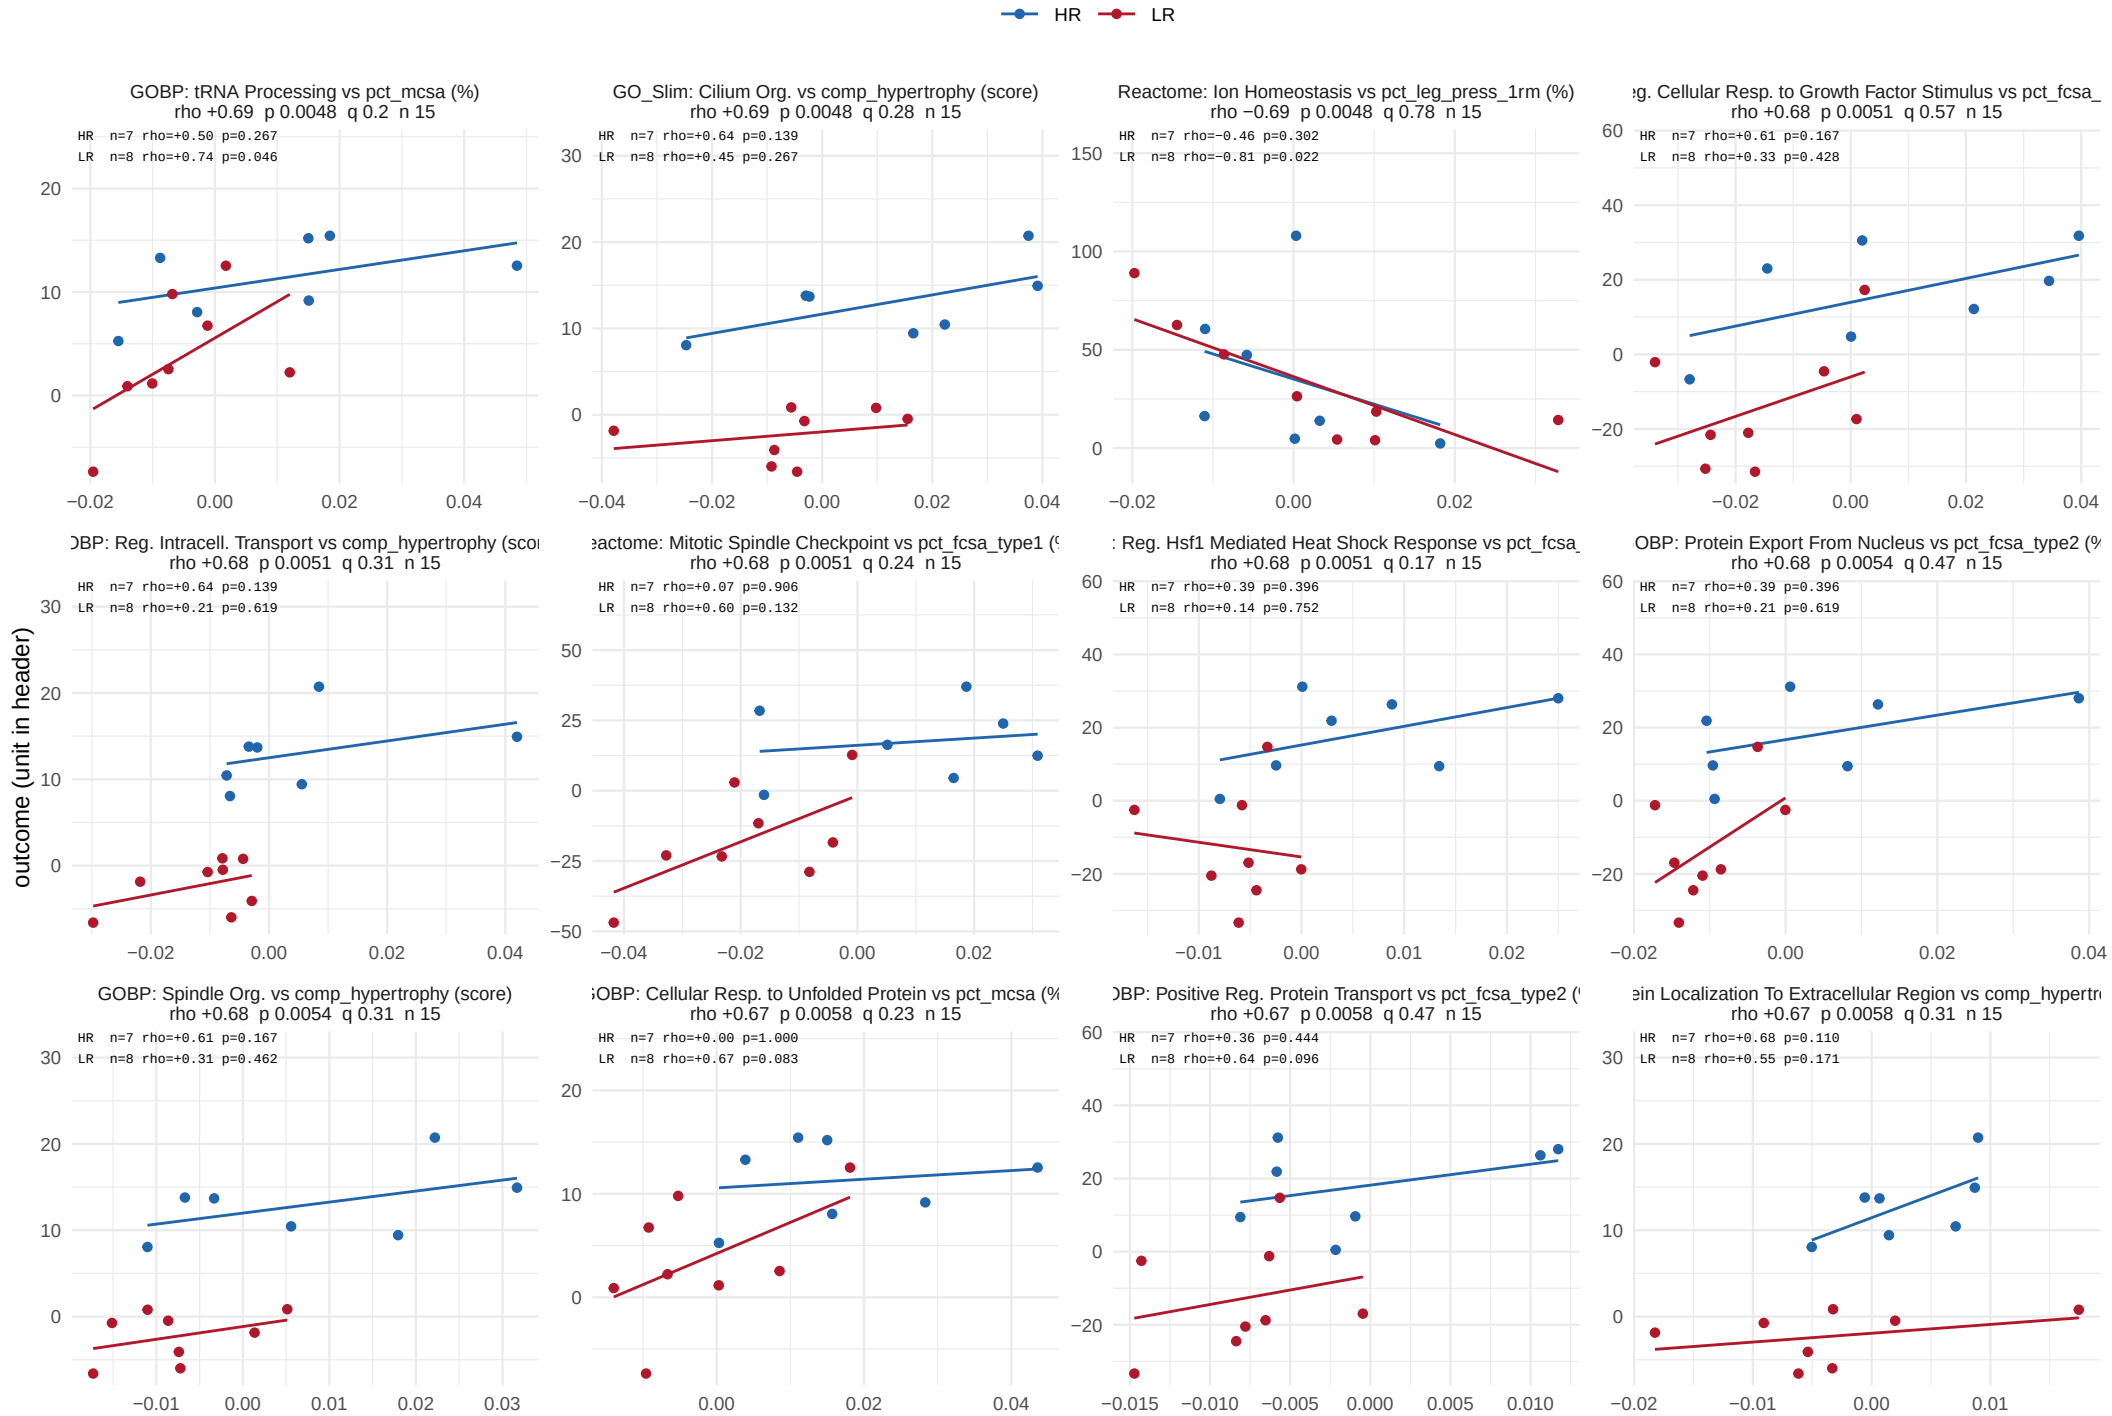


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, acute window


573 of 11024 feature−outcome pairs at p < 0.05, 4 at BH < 0.05. Page 10 of 48.

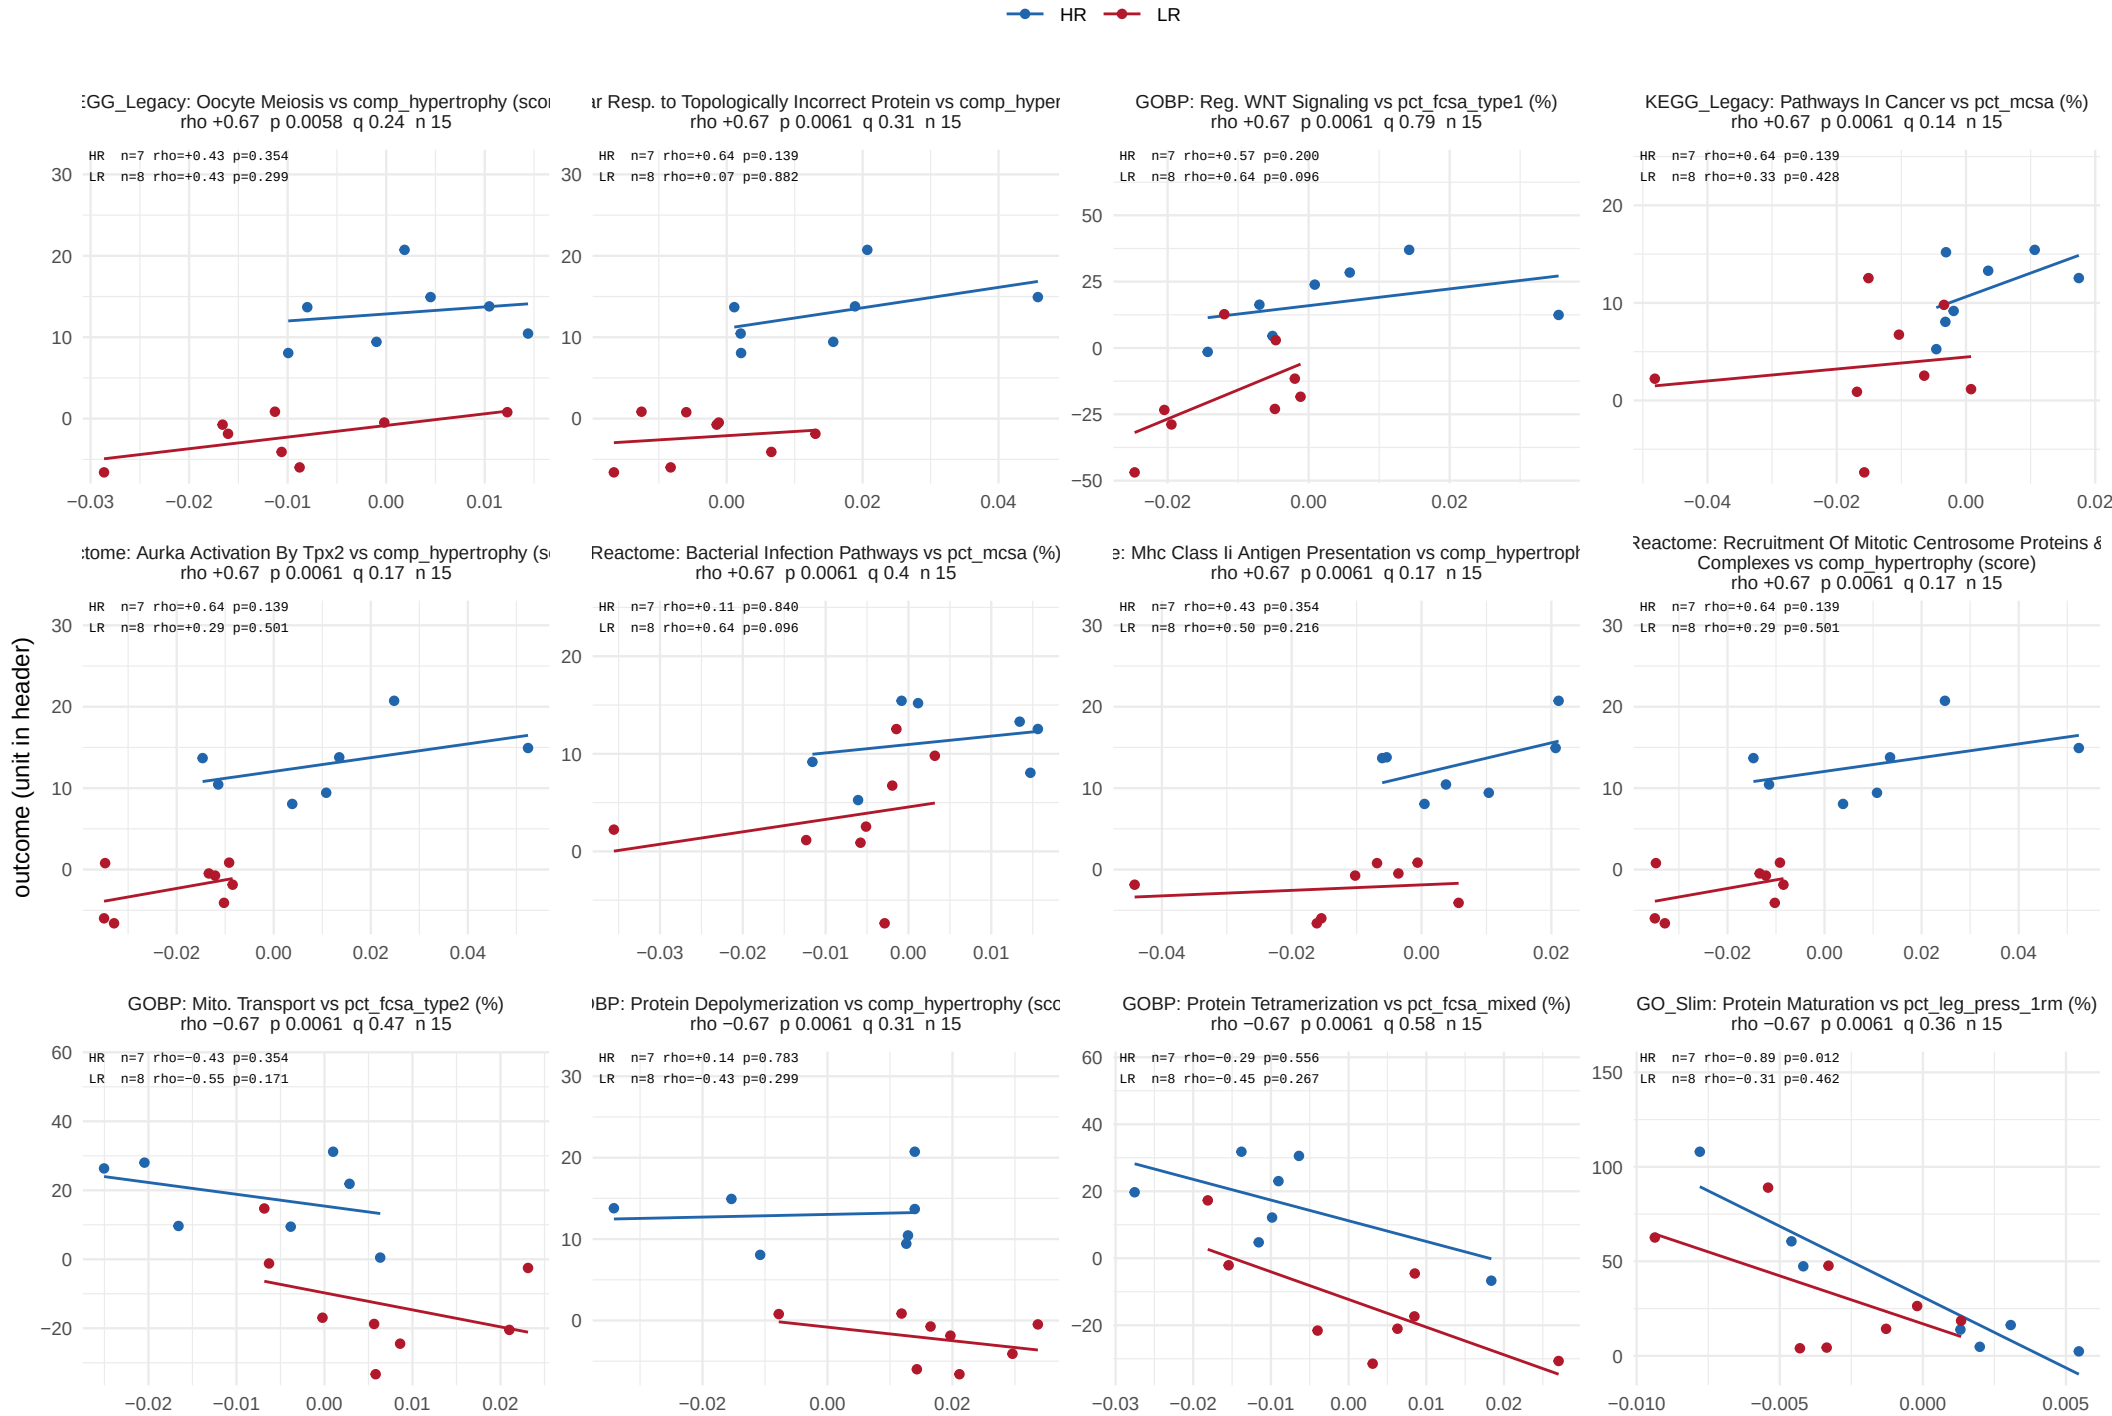


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

# Change score, acute window


573 of 11024 feature−outcome pairs at p < 0.05, 4 at BH < 0.05. Page 11 of 48.

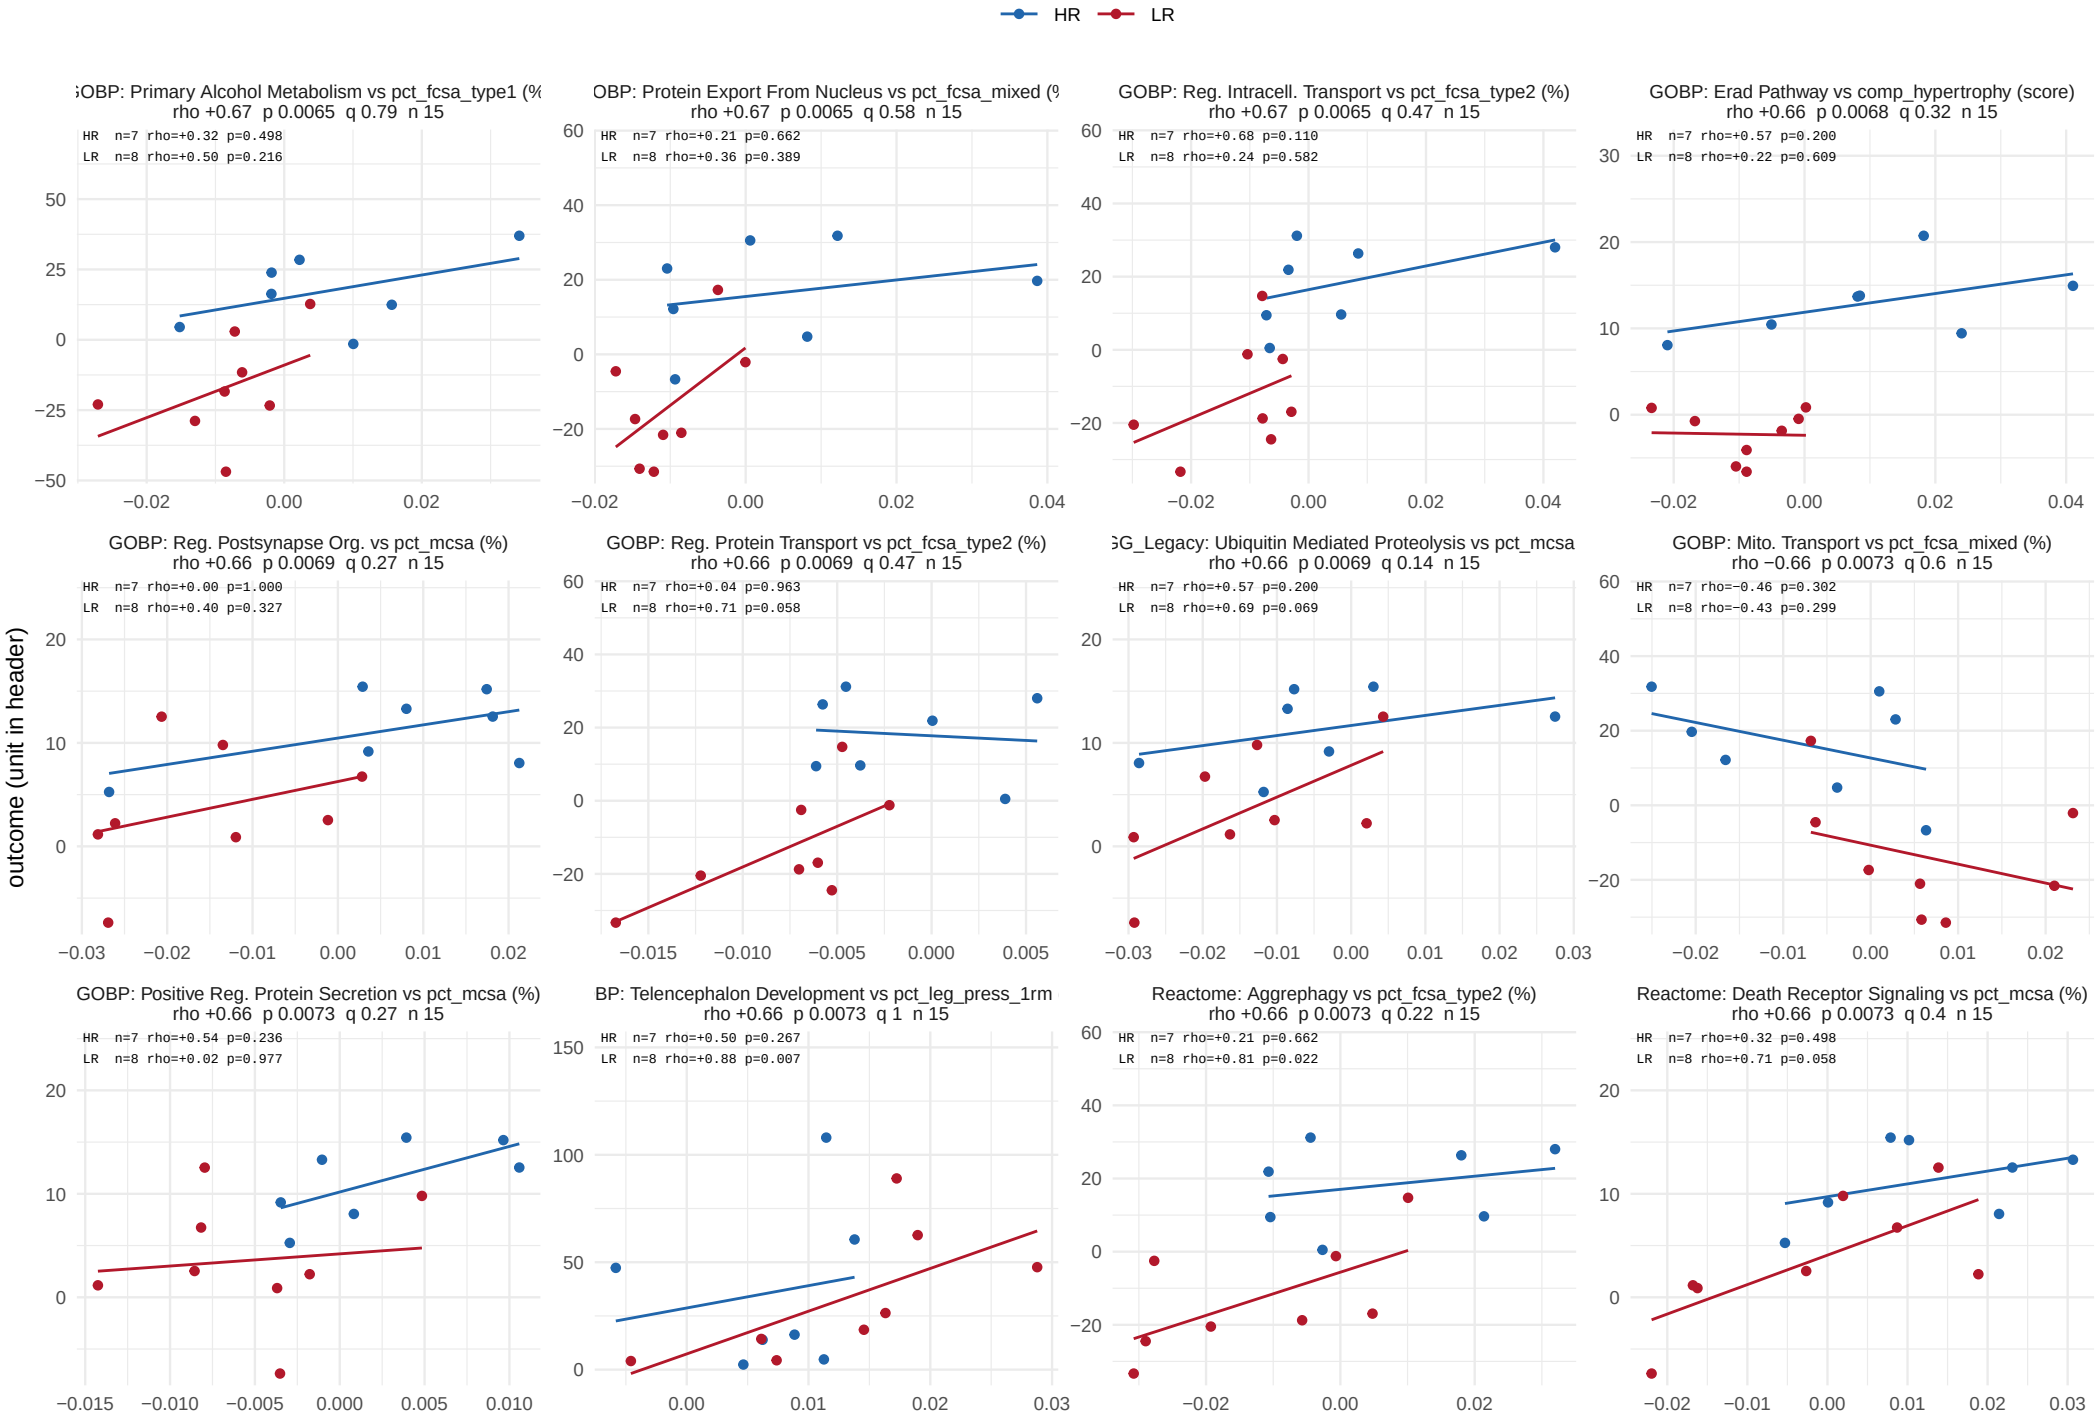


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, acute window


573 of 11024 feature−outcome pairs at p < 0.05, 4 at BH < 0.05. Page 12 of 48.

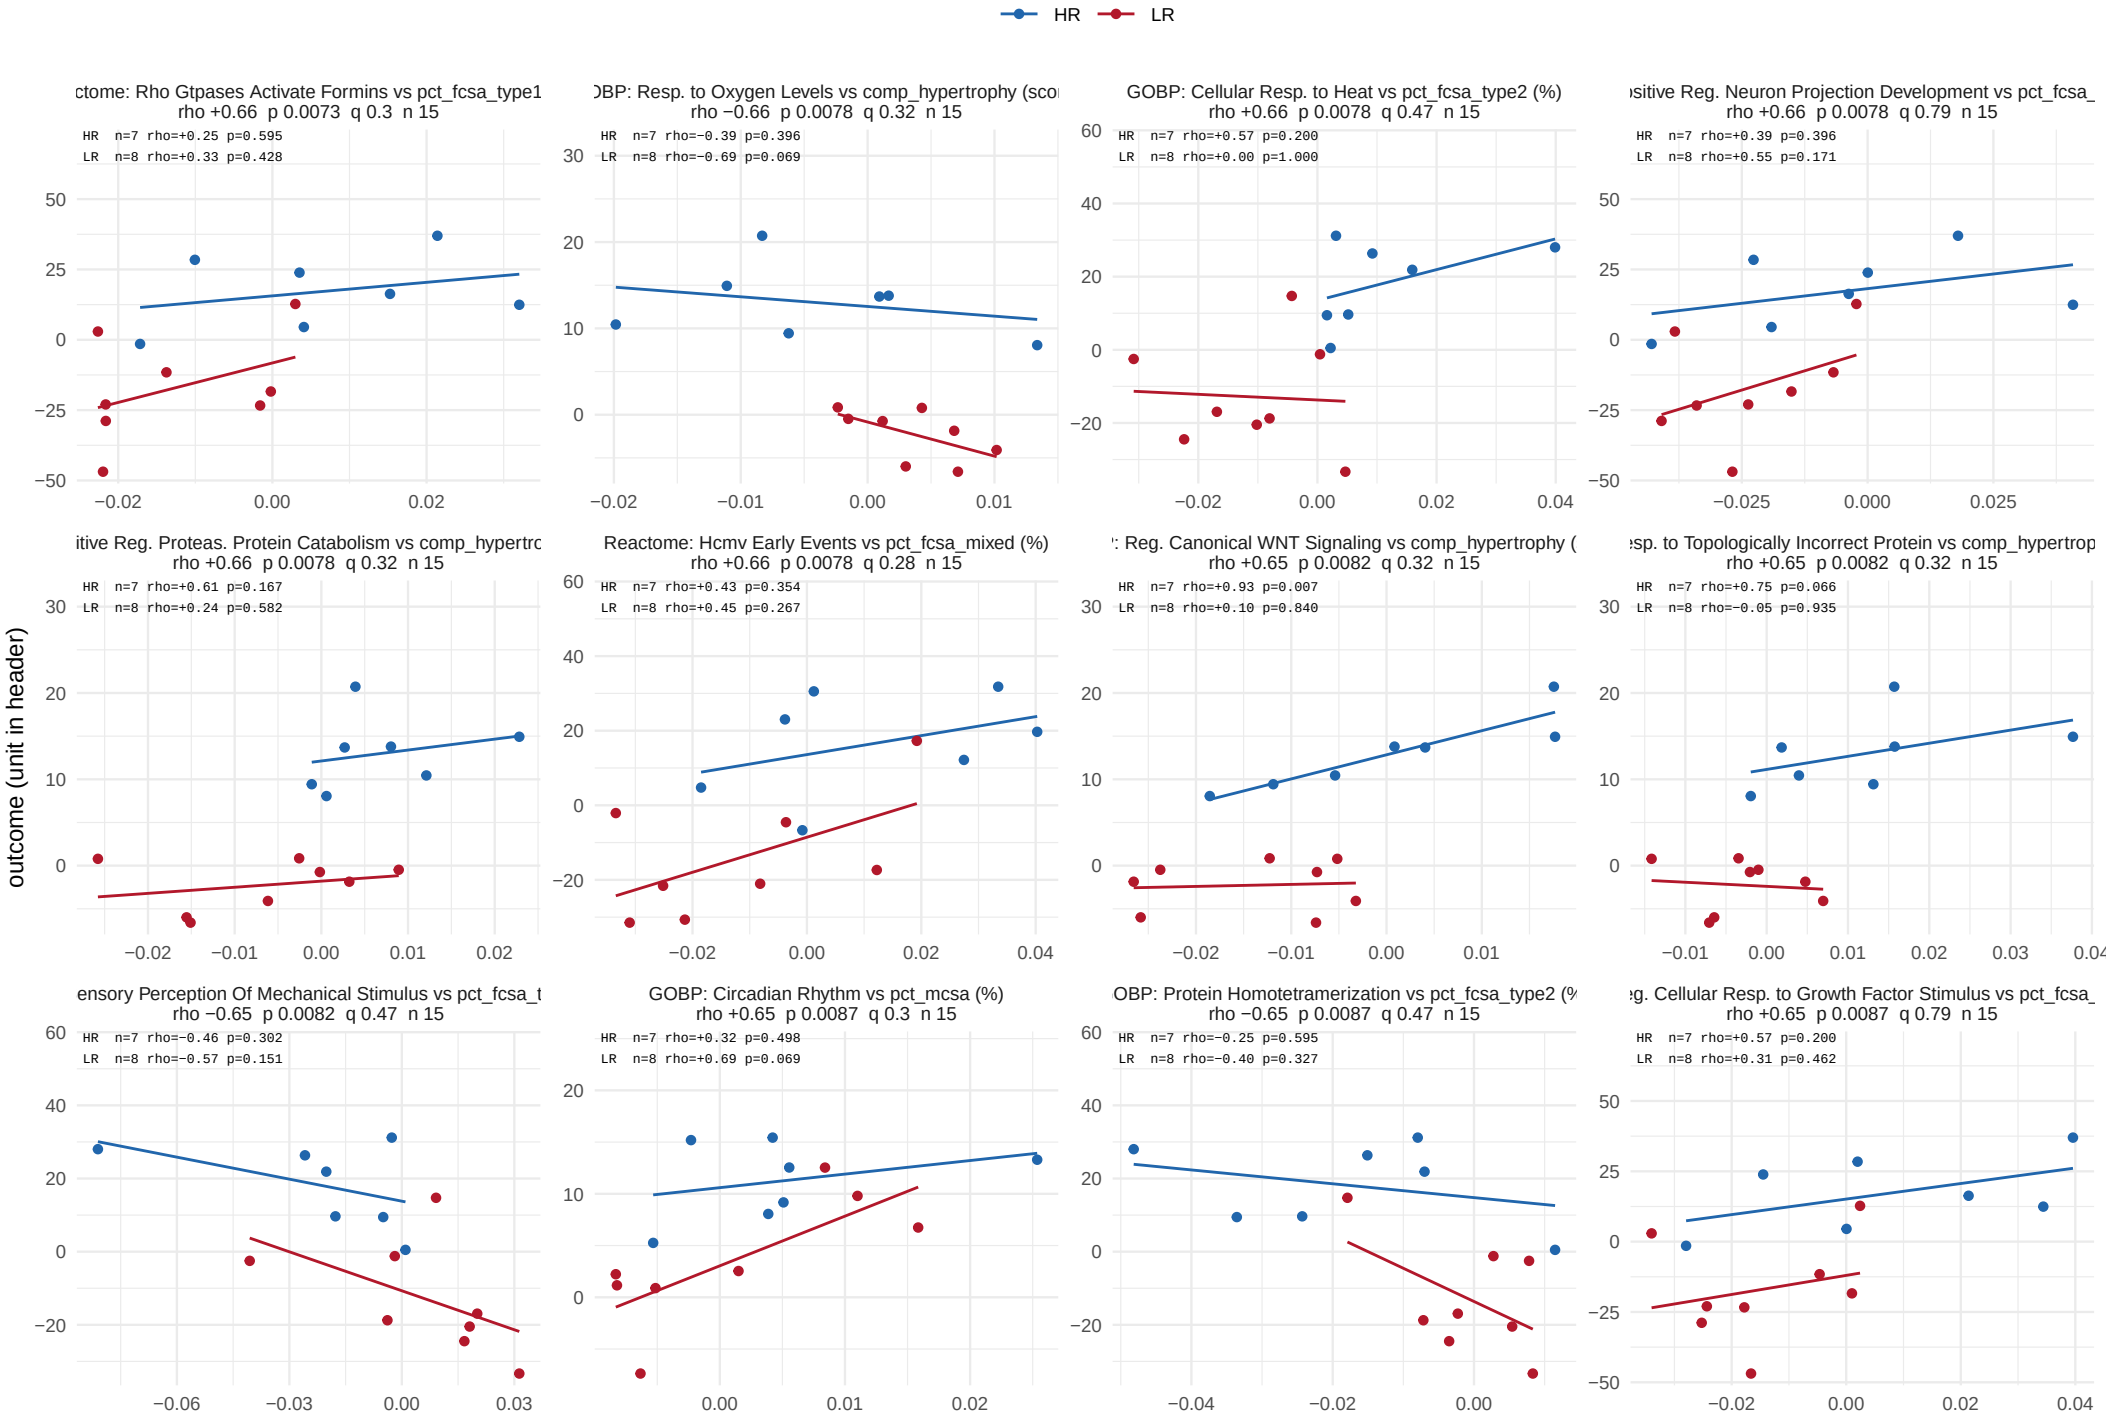


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

# Change score, acute window


573 of 11024 feature−outcome pairs at p < 0.05, 4 at BH < 0.05. Page 13 of 48.

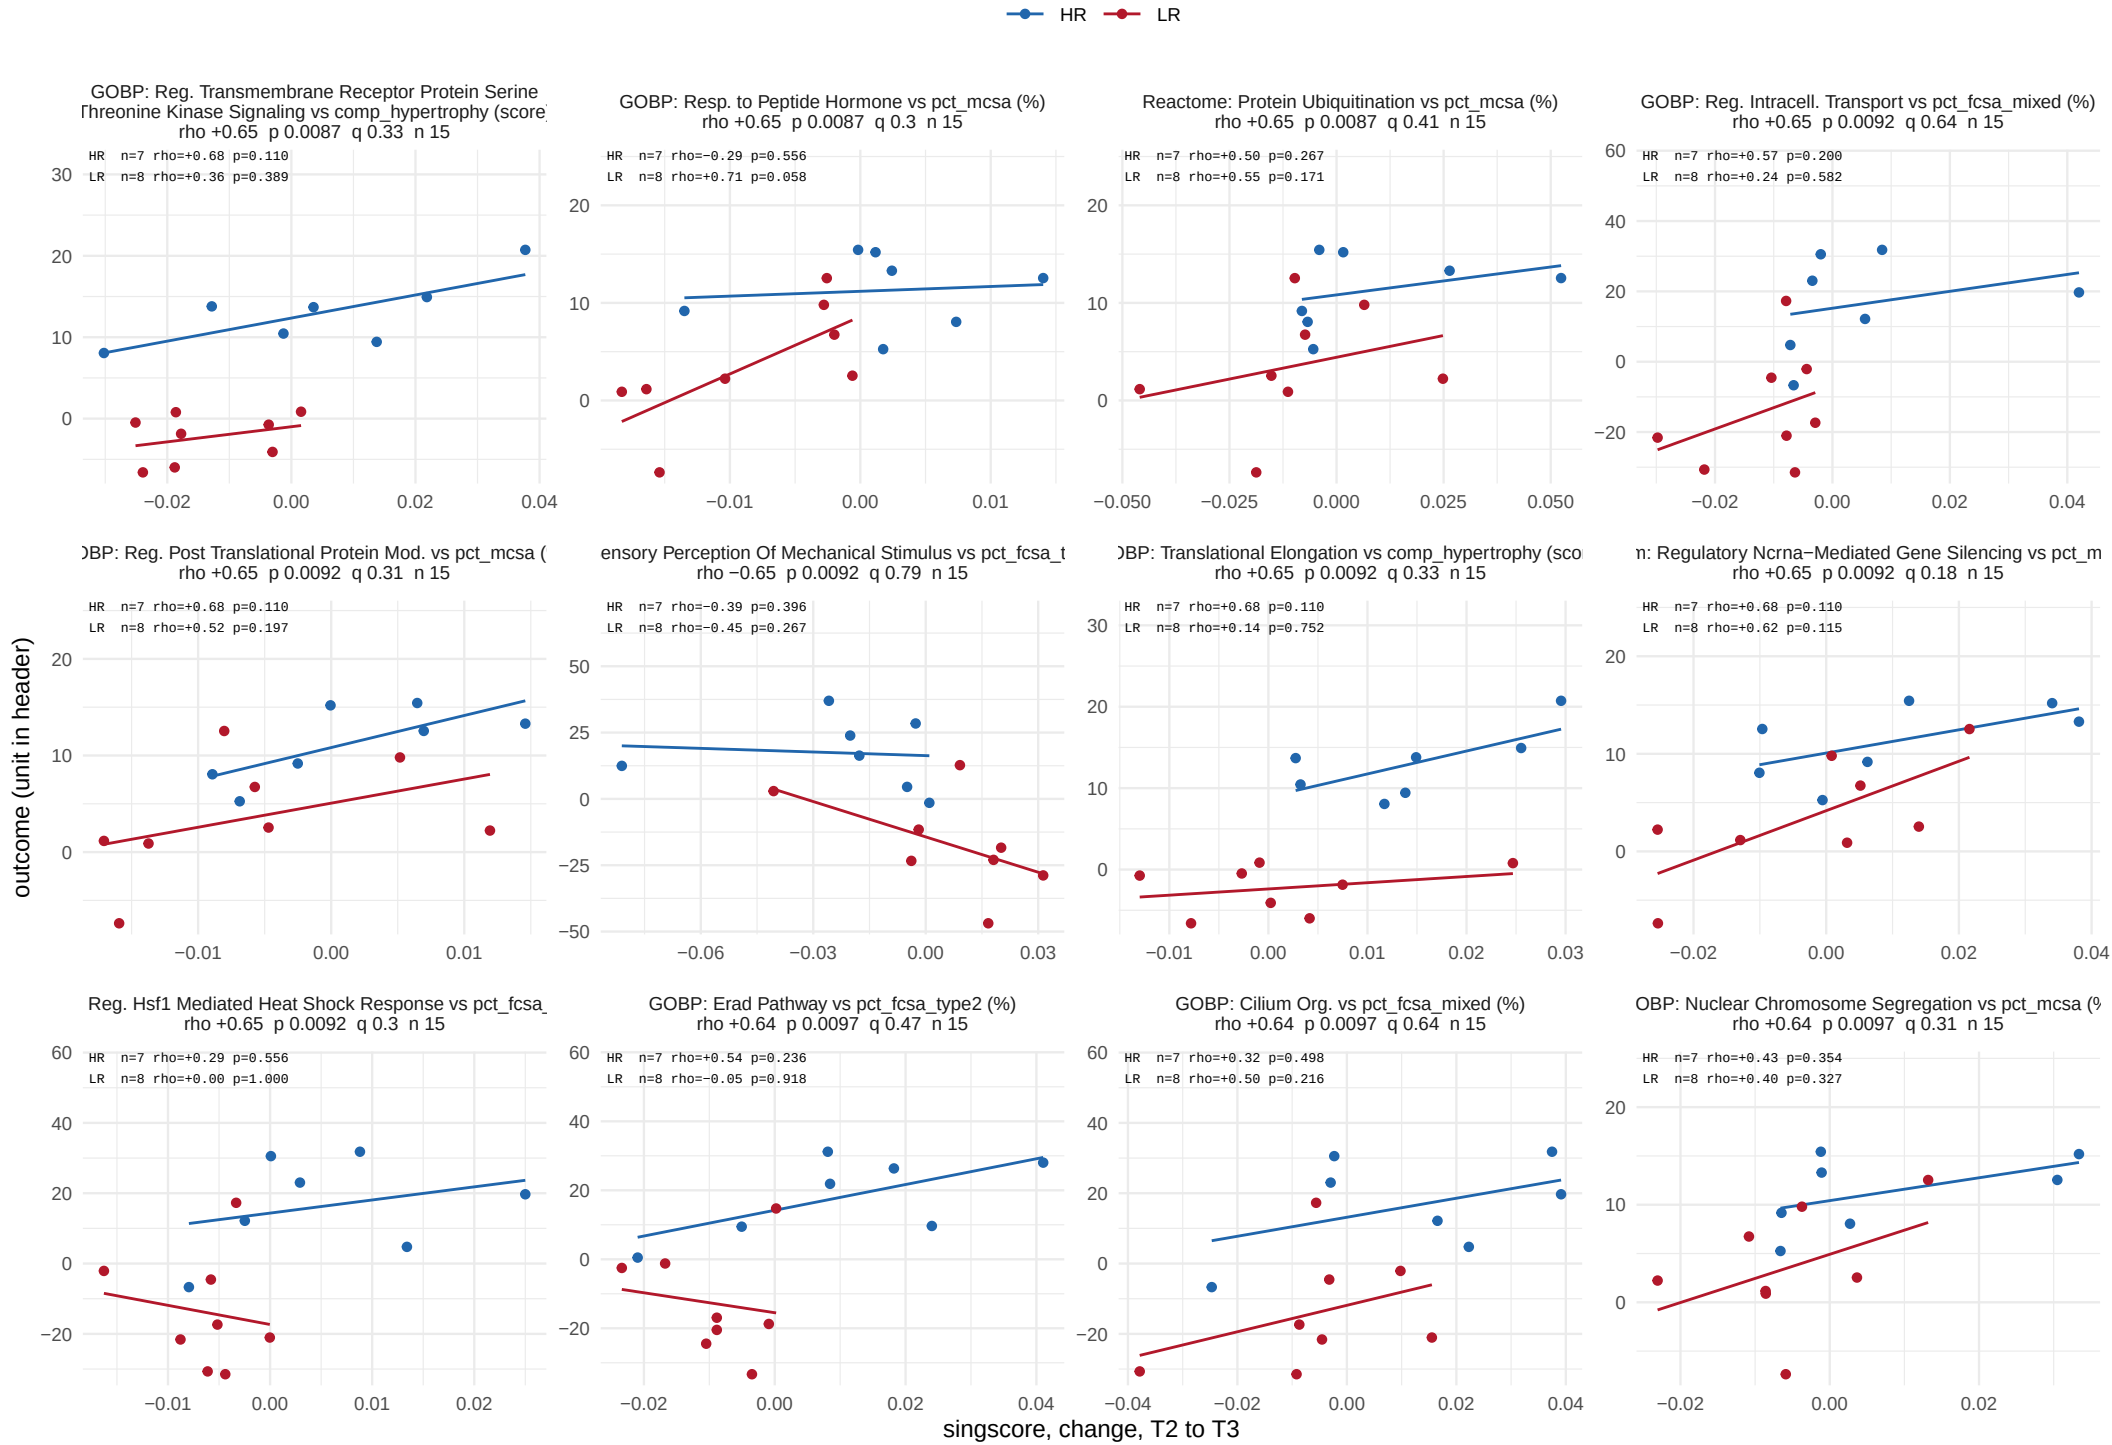


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, acute window


573 of 11024 feature−outcome pairs at p < 0.05, 4 at BH < 0.05. Page 14 of 48.

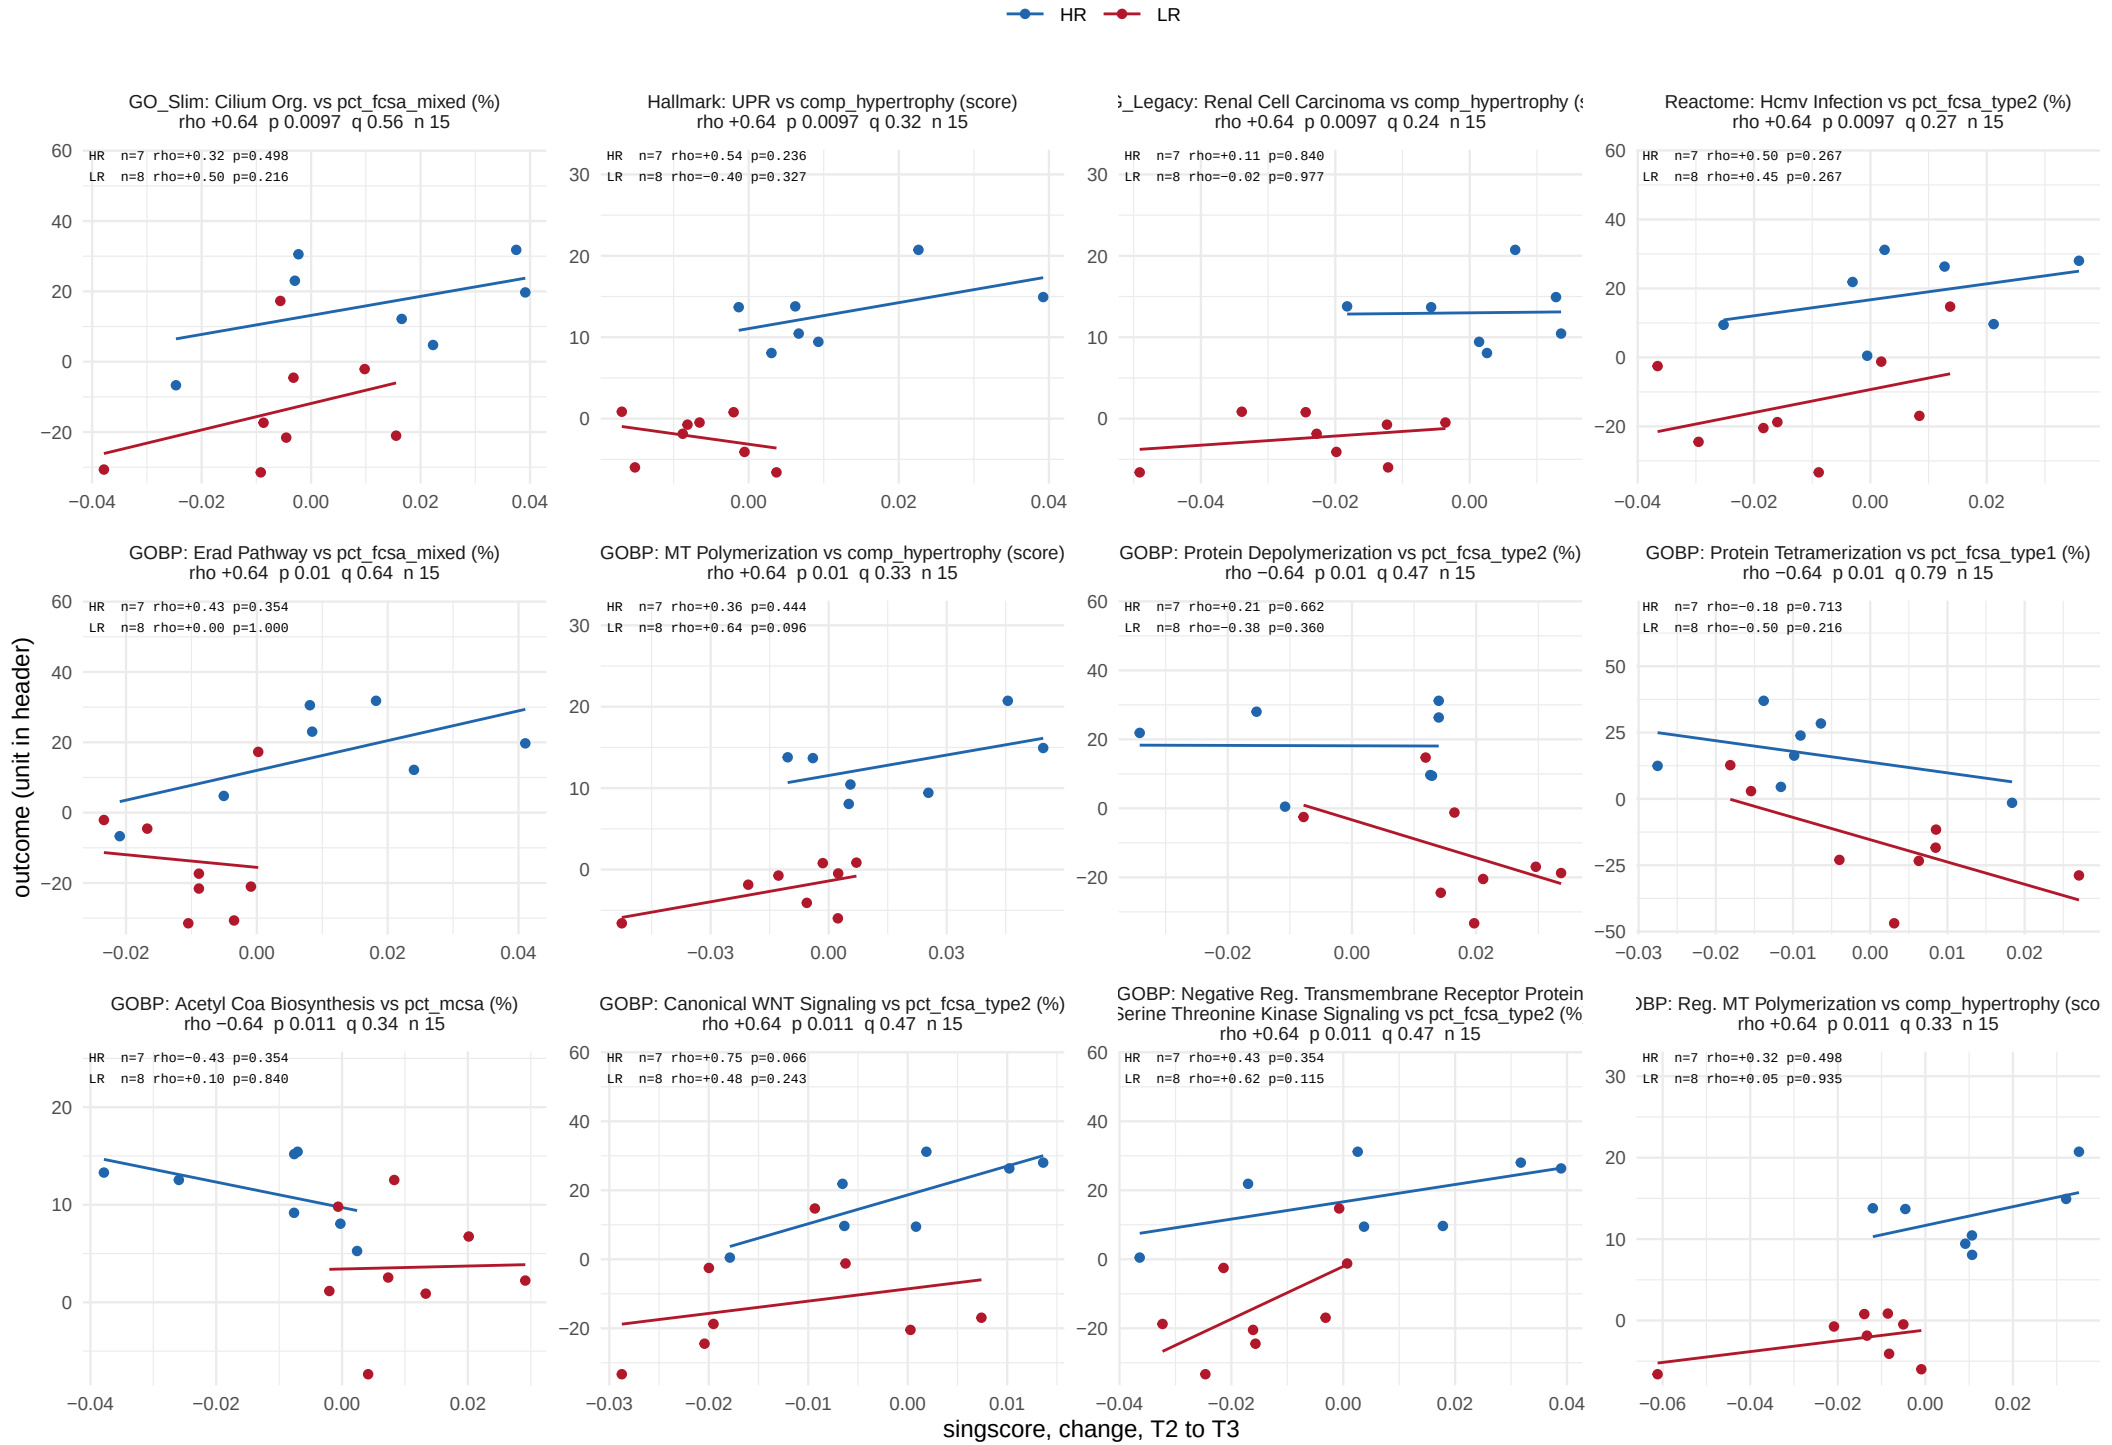


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, acute window


573 of 11024 feature−outcome pairs at p < 0.05, 4 at BH < 0.05. Page 15 of 48.

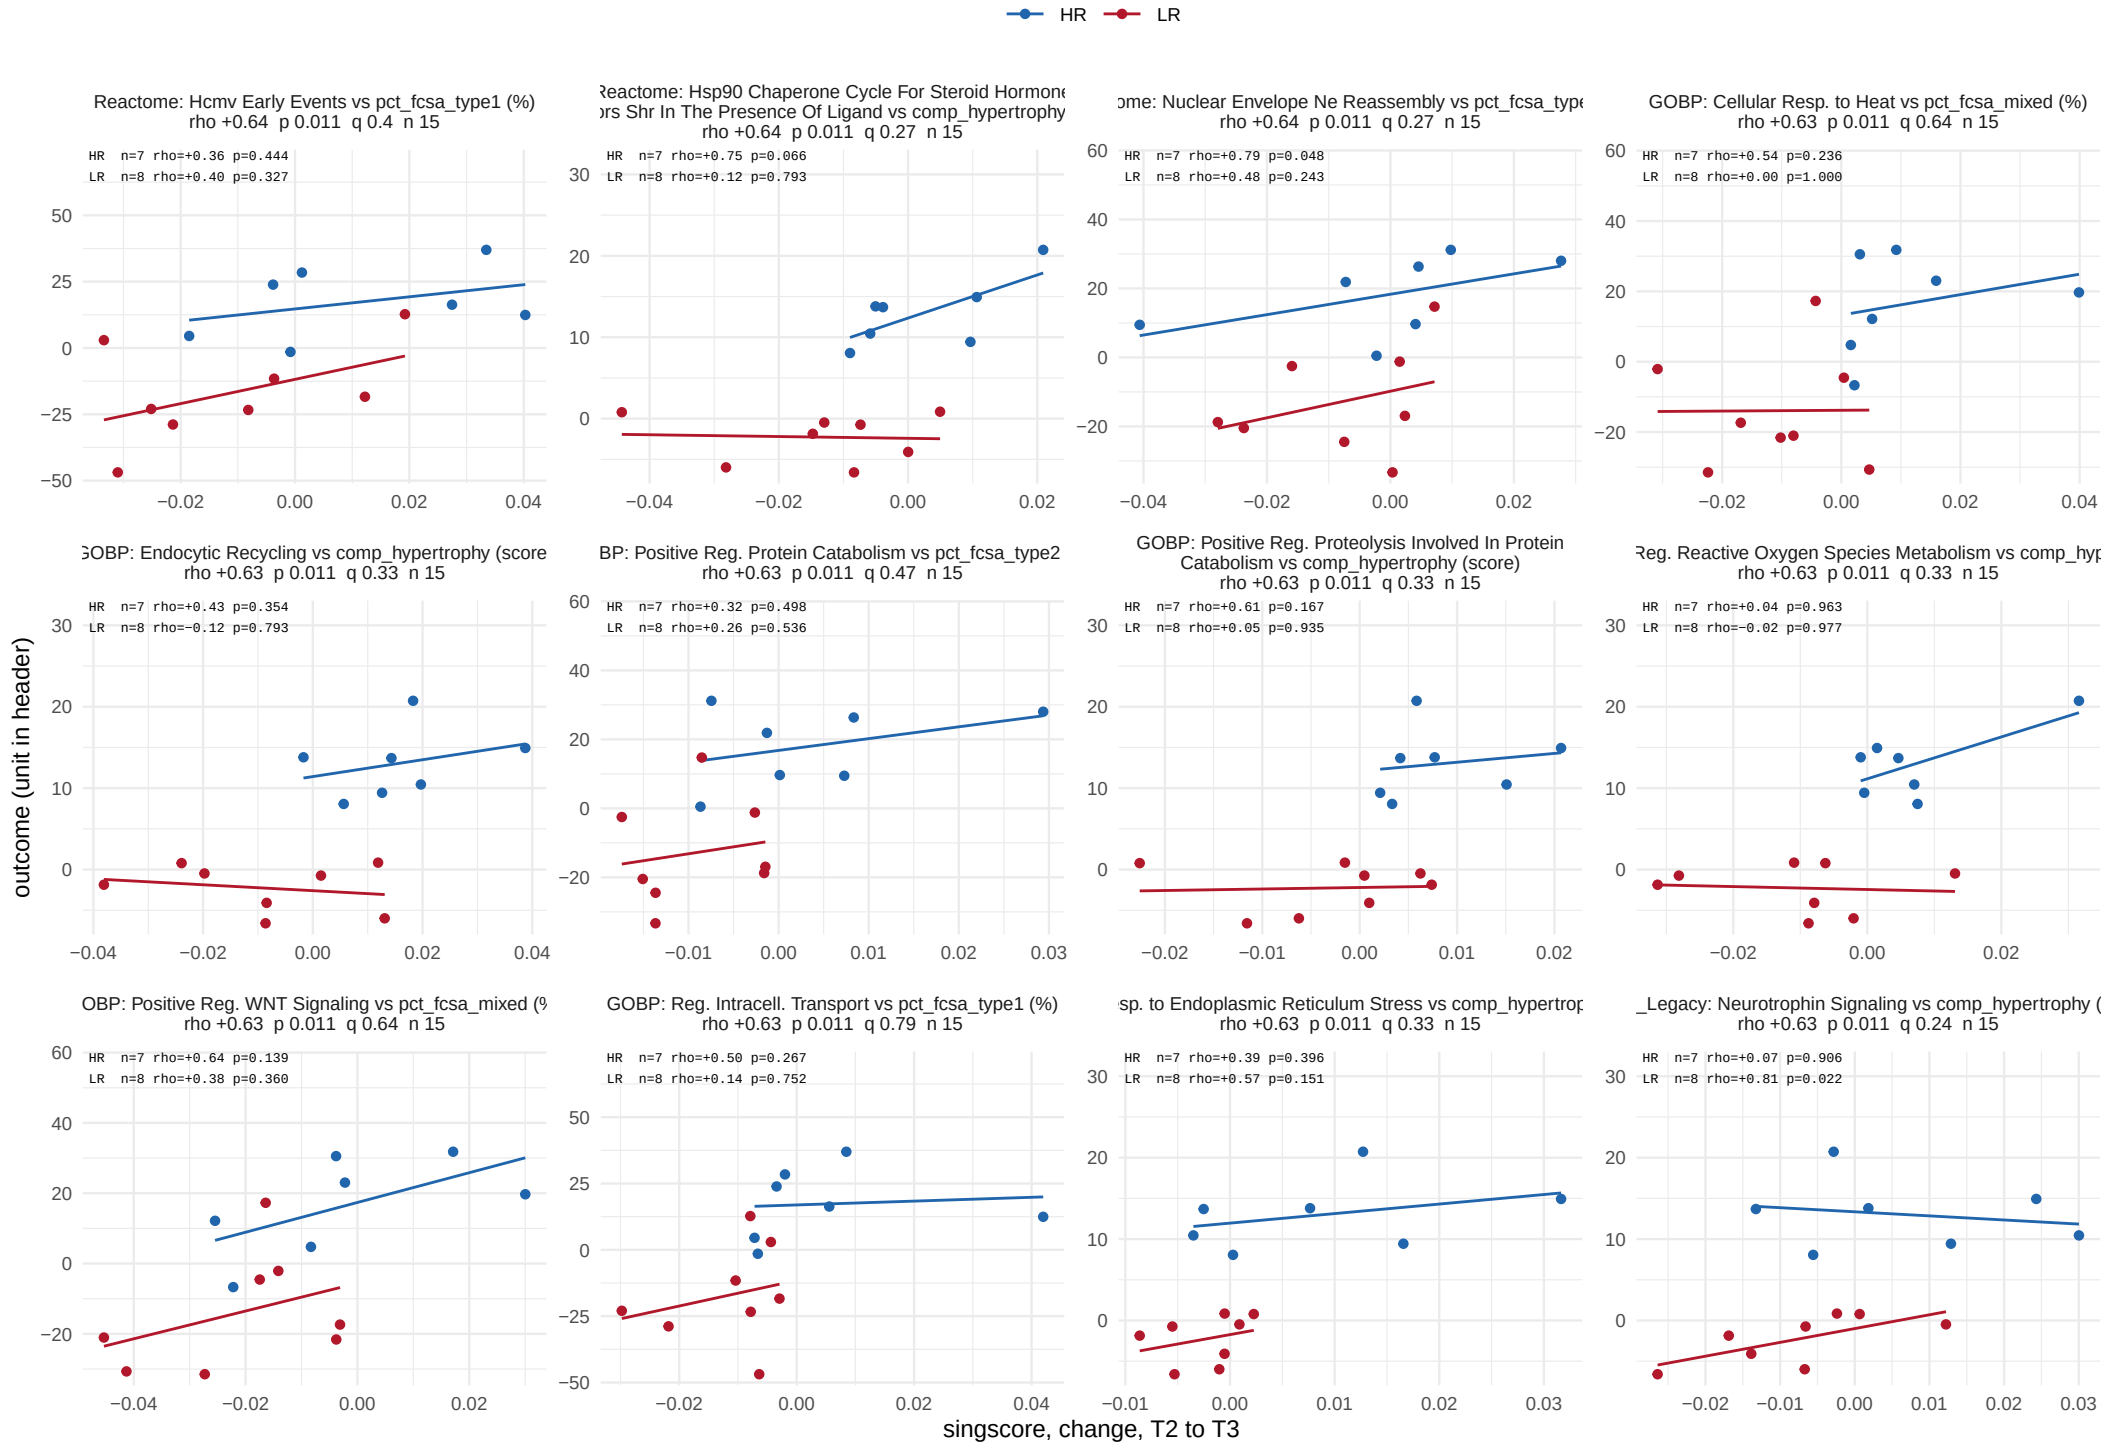


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, acute window


573 of 11024 feature−outcome pairs at p < 0.05, 4 at BH < 0.05. Page 16 of 48.

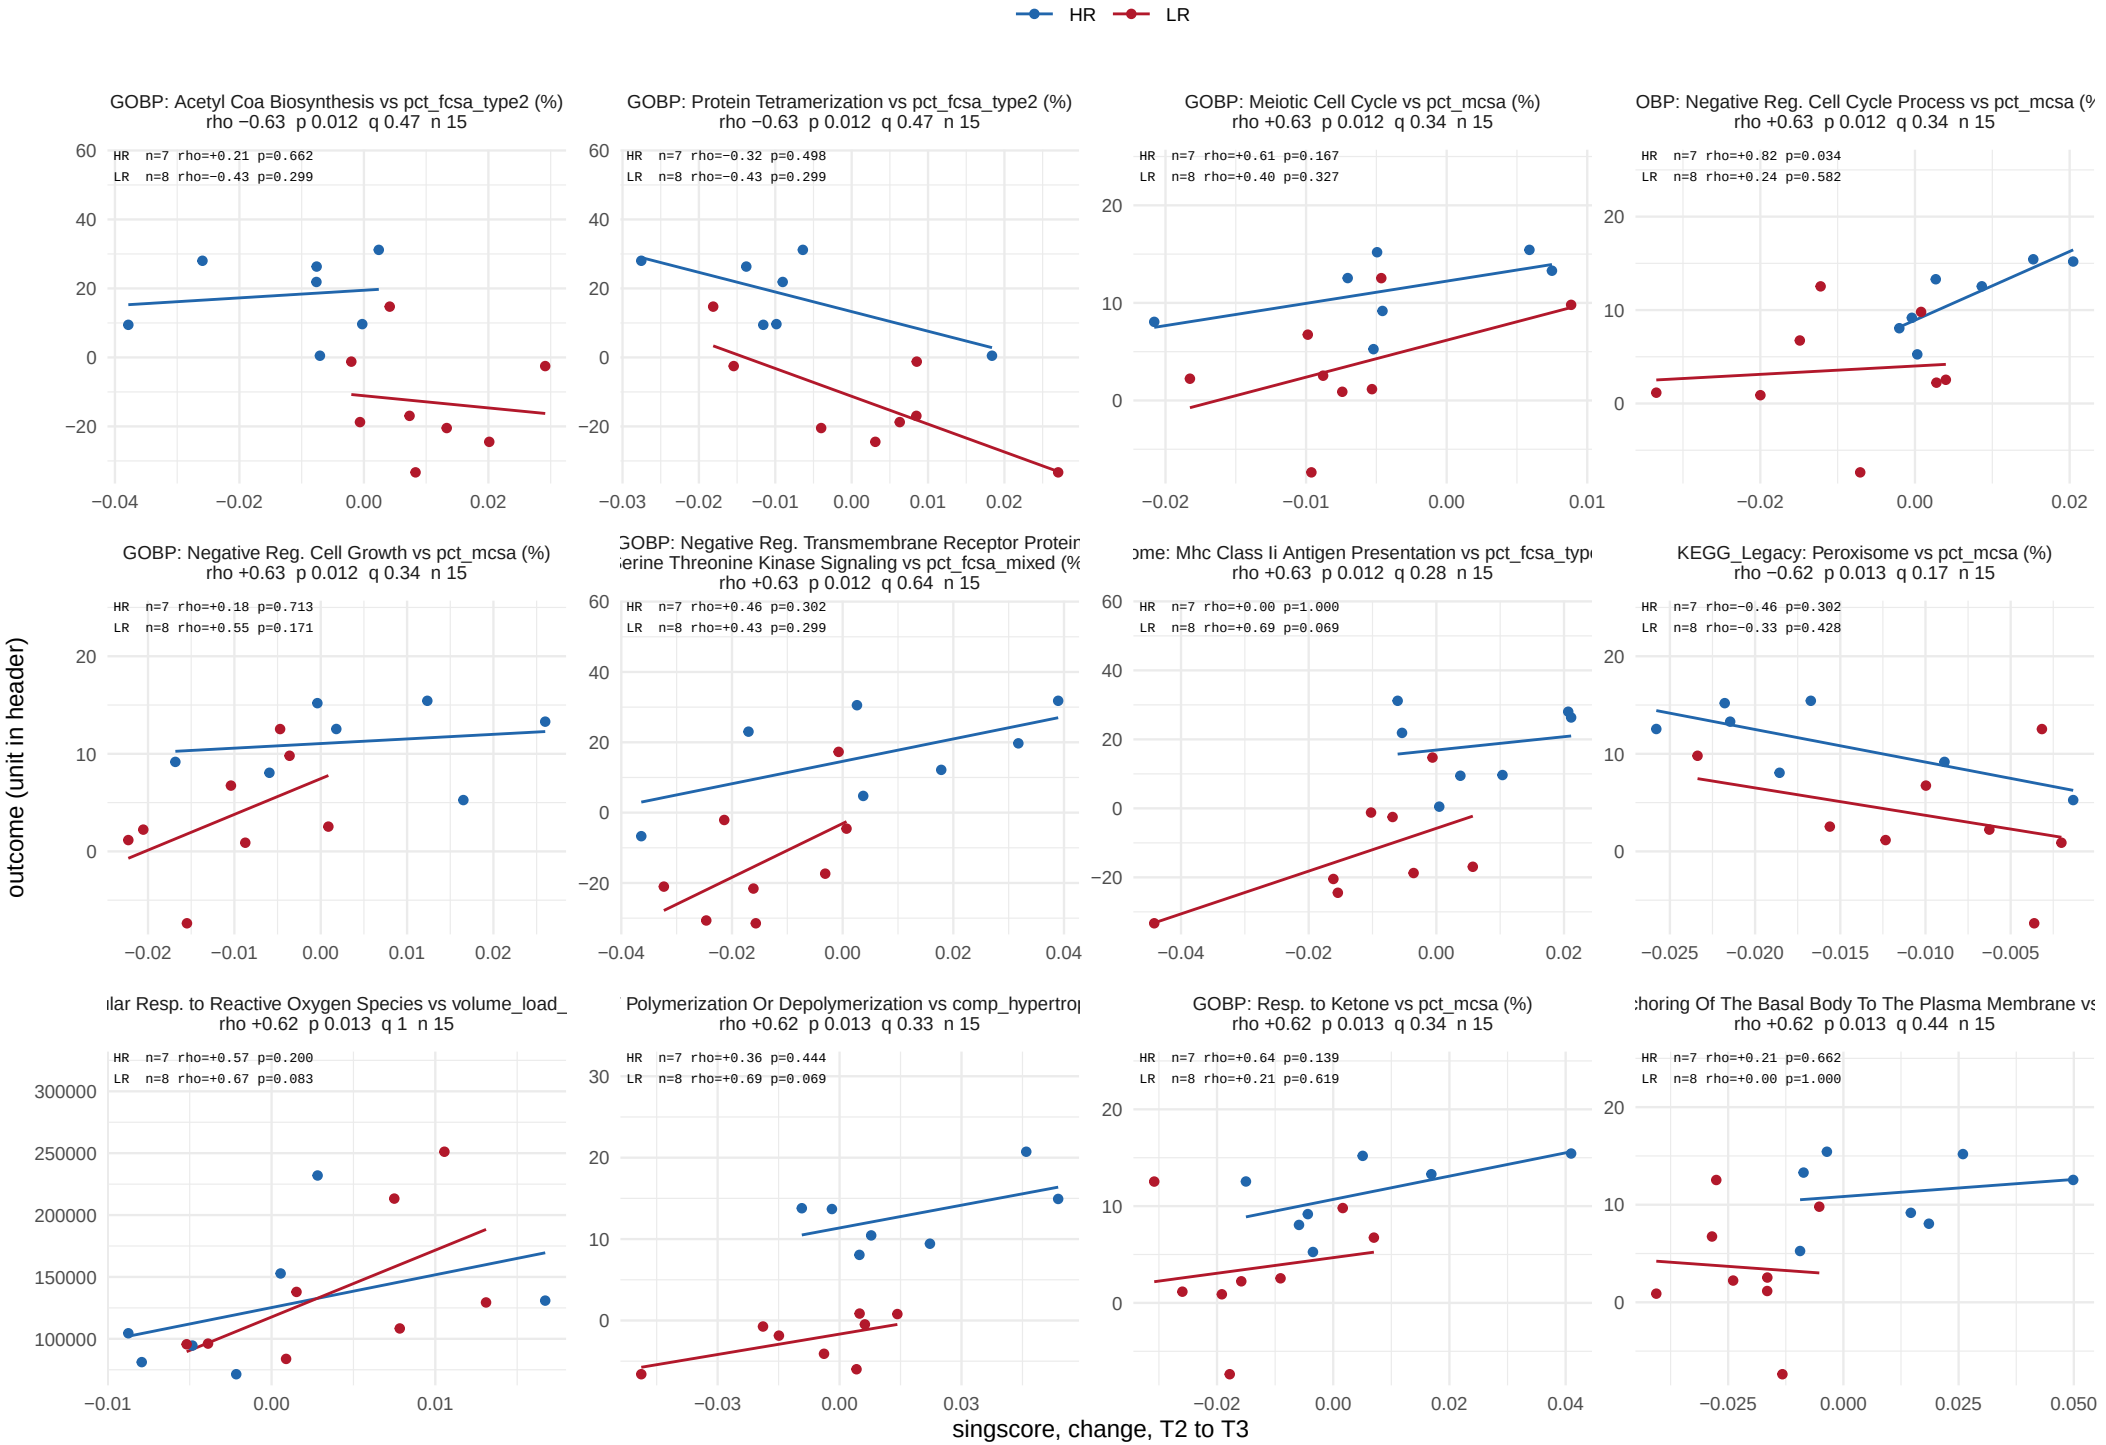


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

# Change score, acute window


573 of 11024 feature−outcome pairs at p < 0.05, 4 at BH < 0.05. Page 17 of 48.

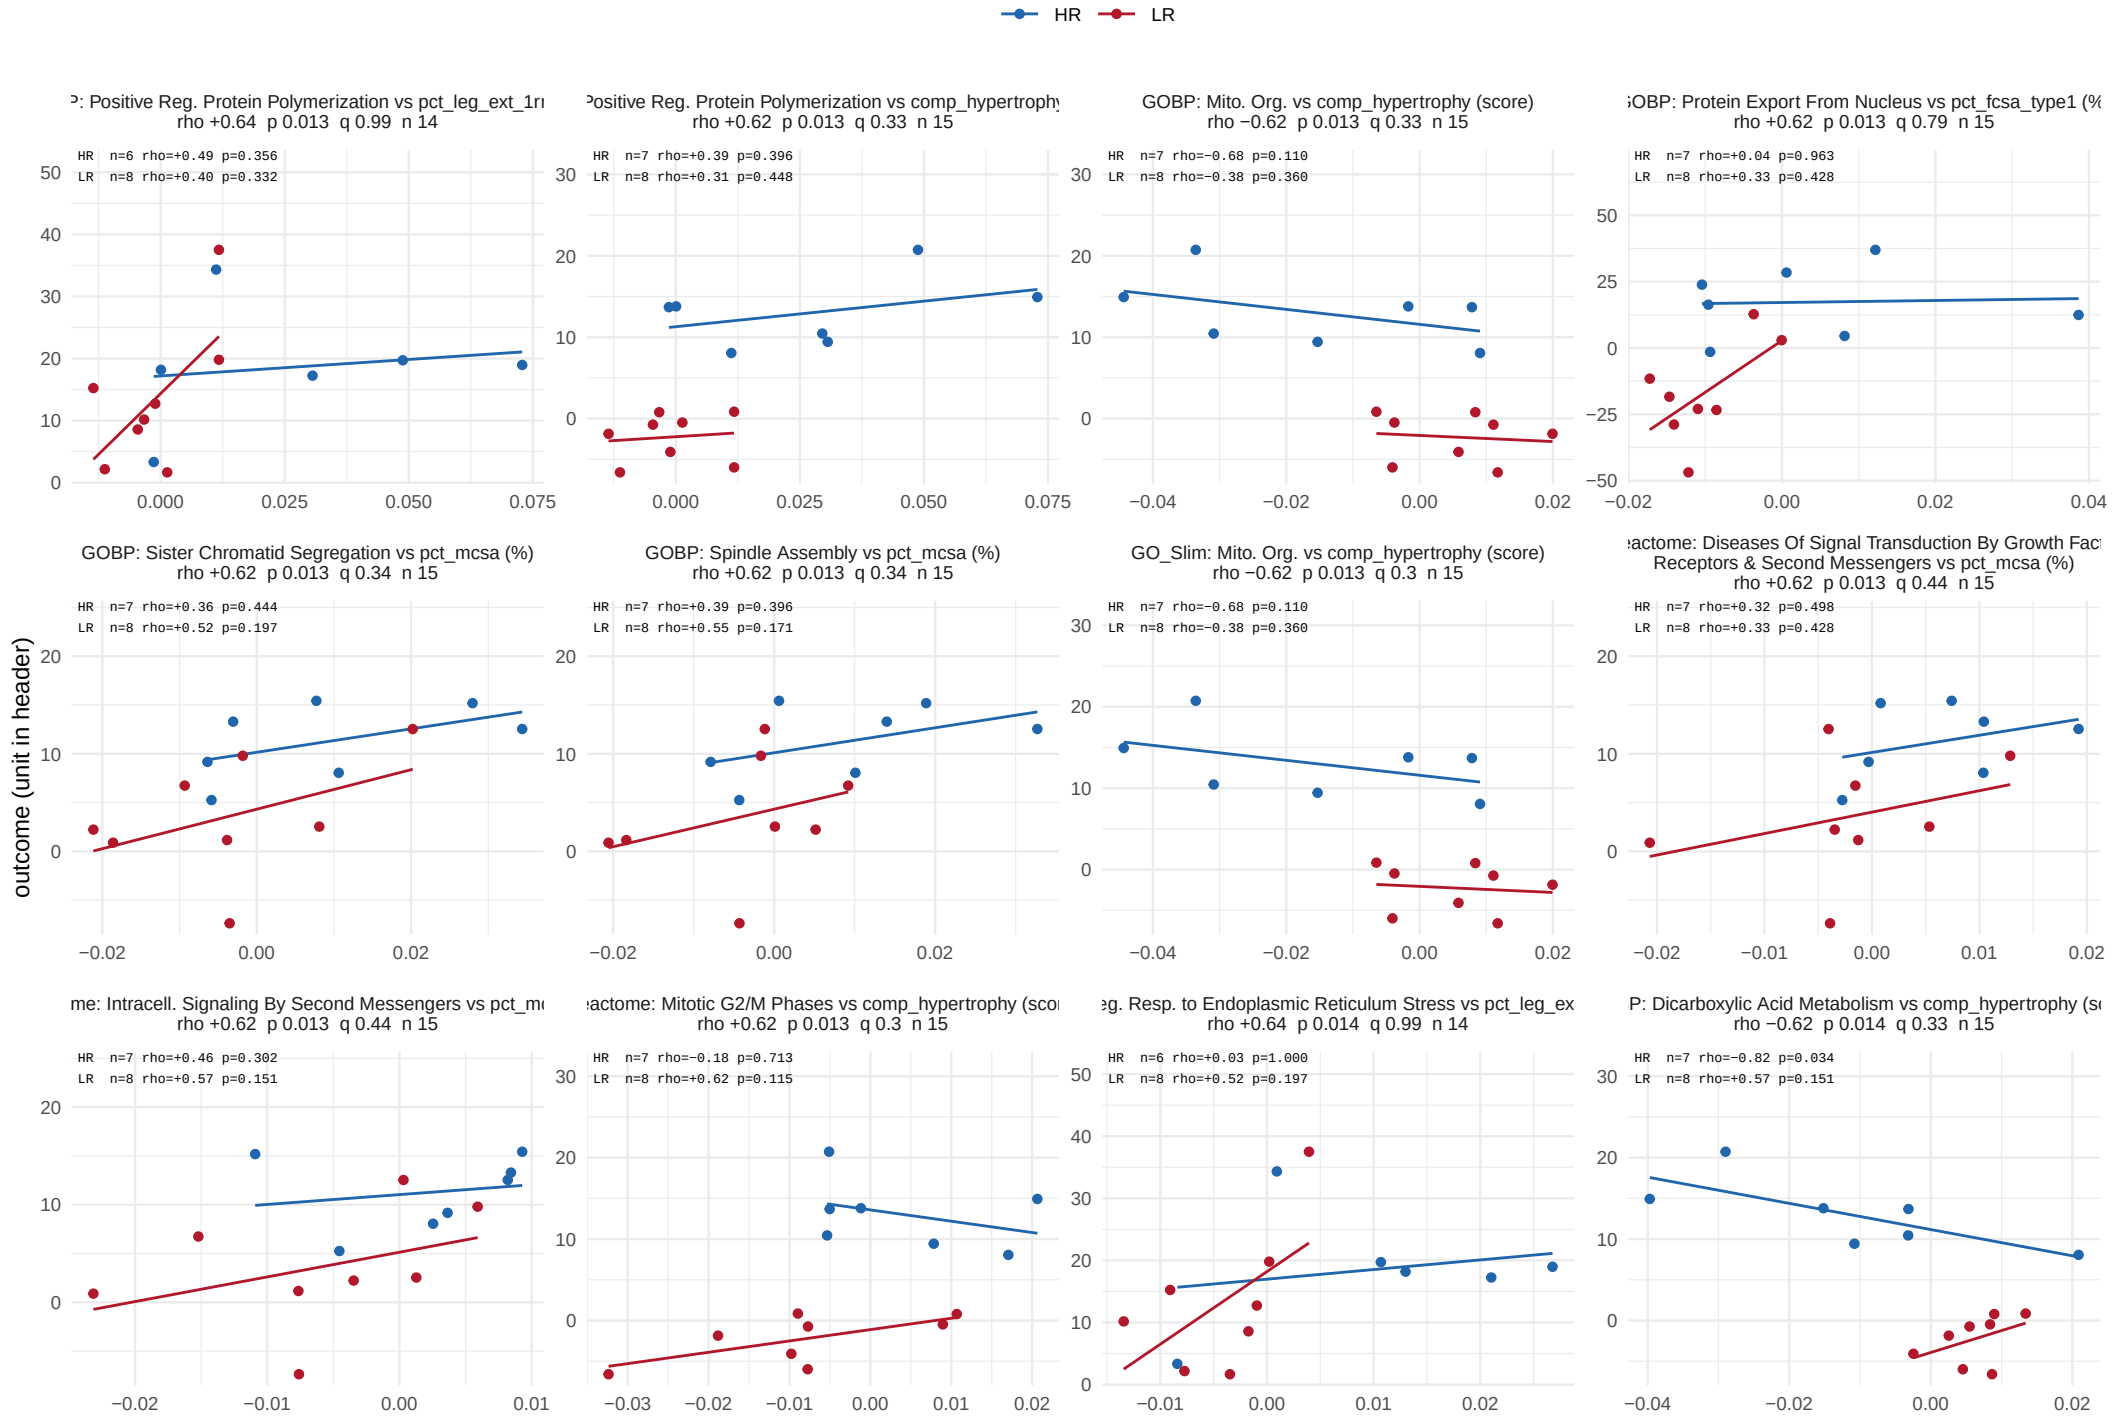


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, acute window


573 of 11024 feature−outcome pairs at p < 0.05, 4 at BH < 0.05. Page 18 of 48.

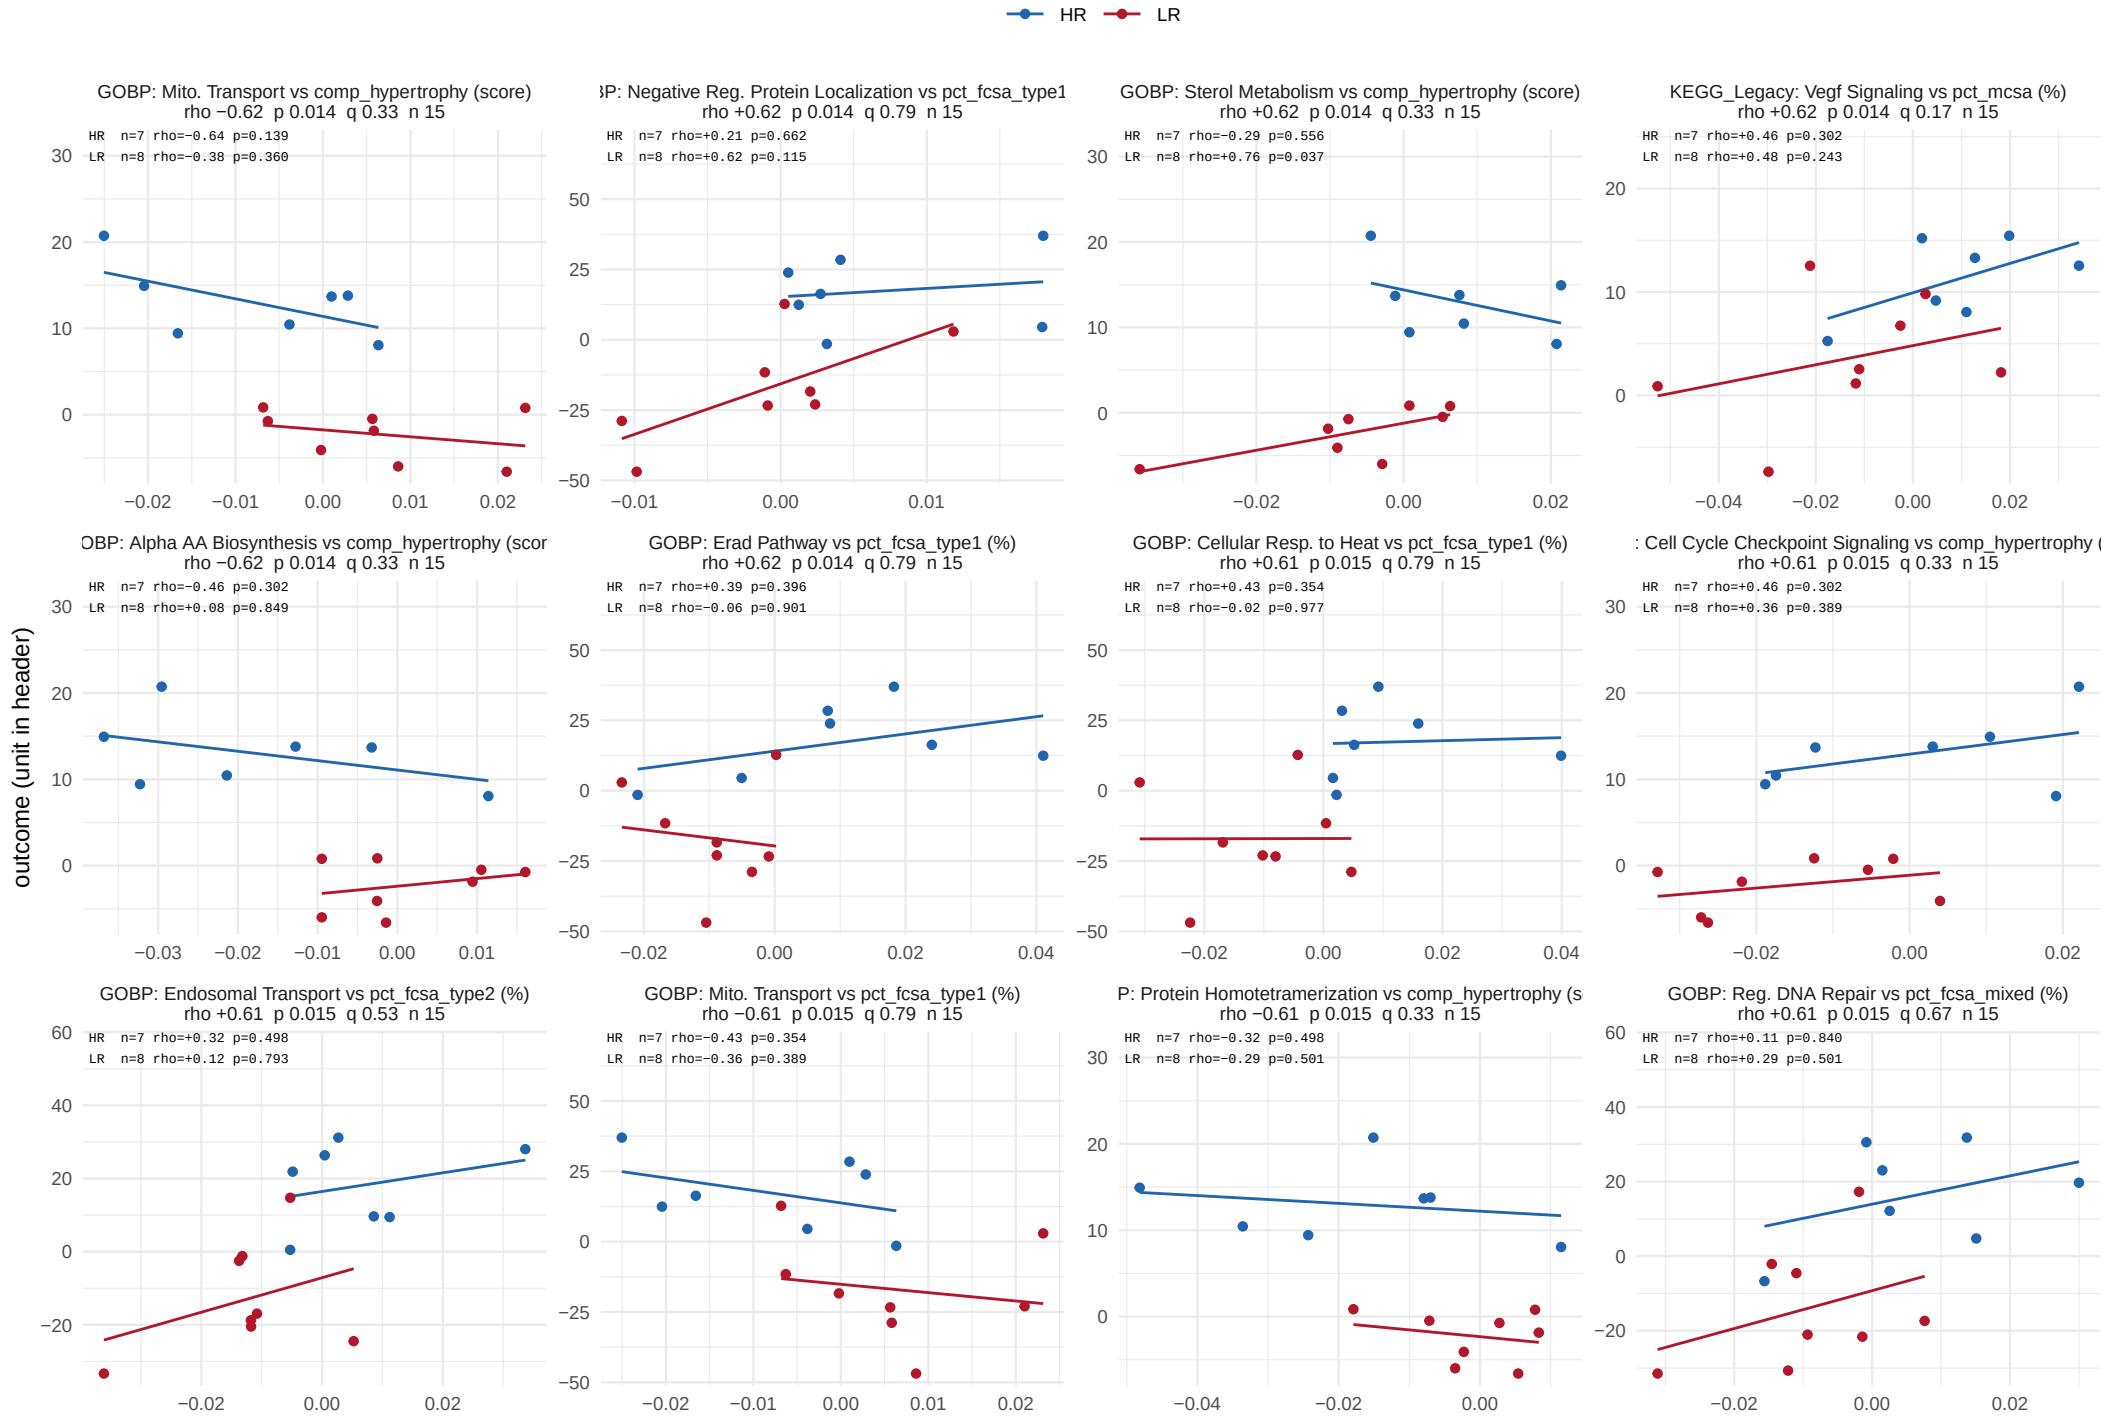


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, acute window


573 of 11024 feature−outcome pairs at p < 0.05, 4 at BH < 0.05. Page 19 of 48.

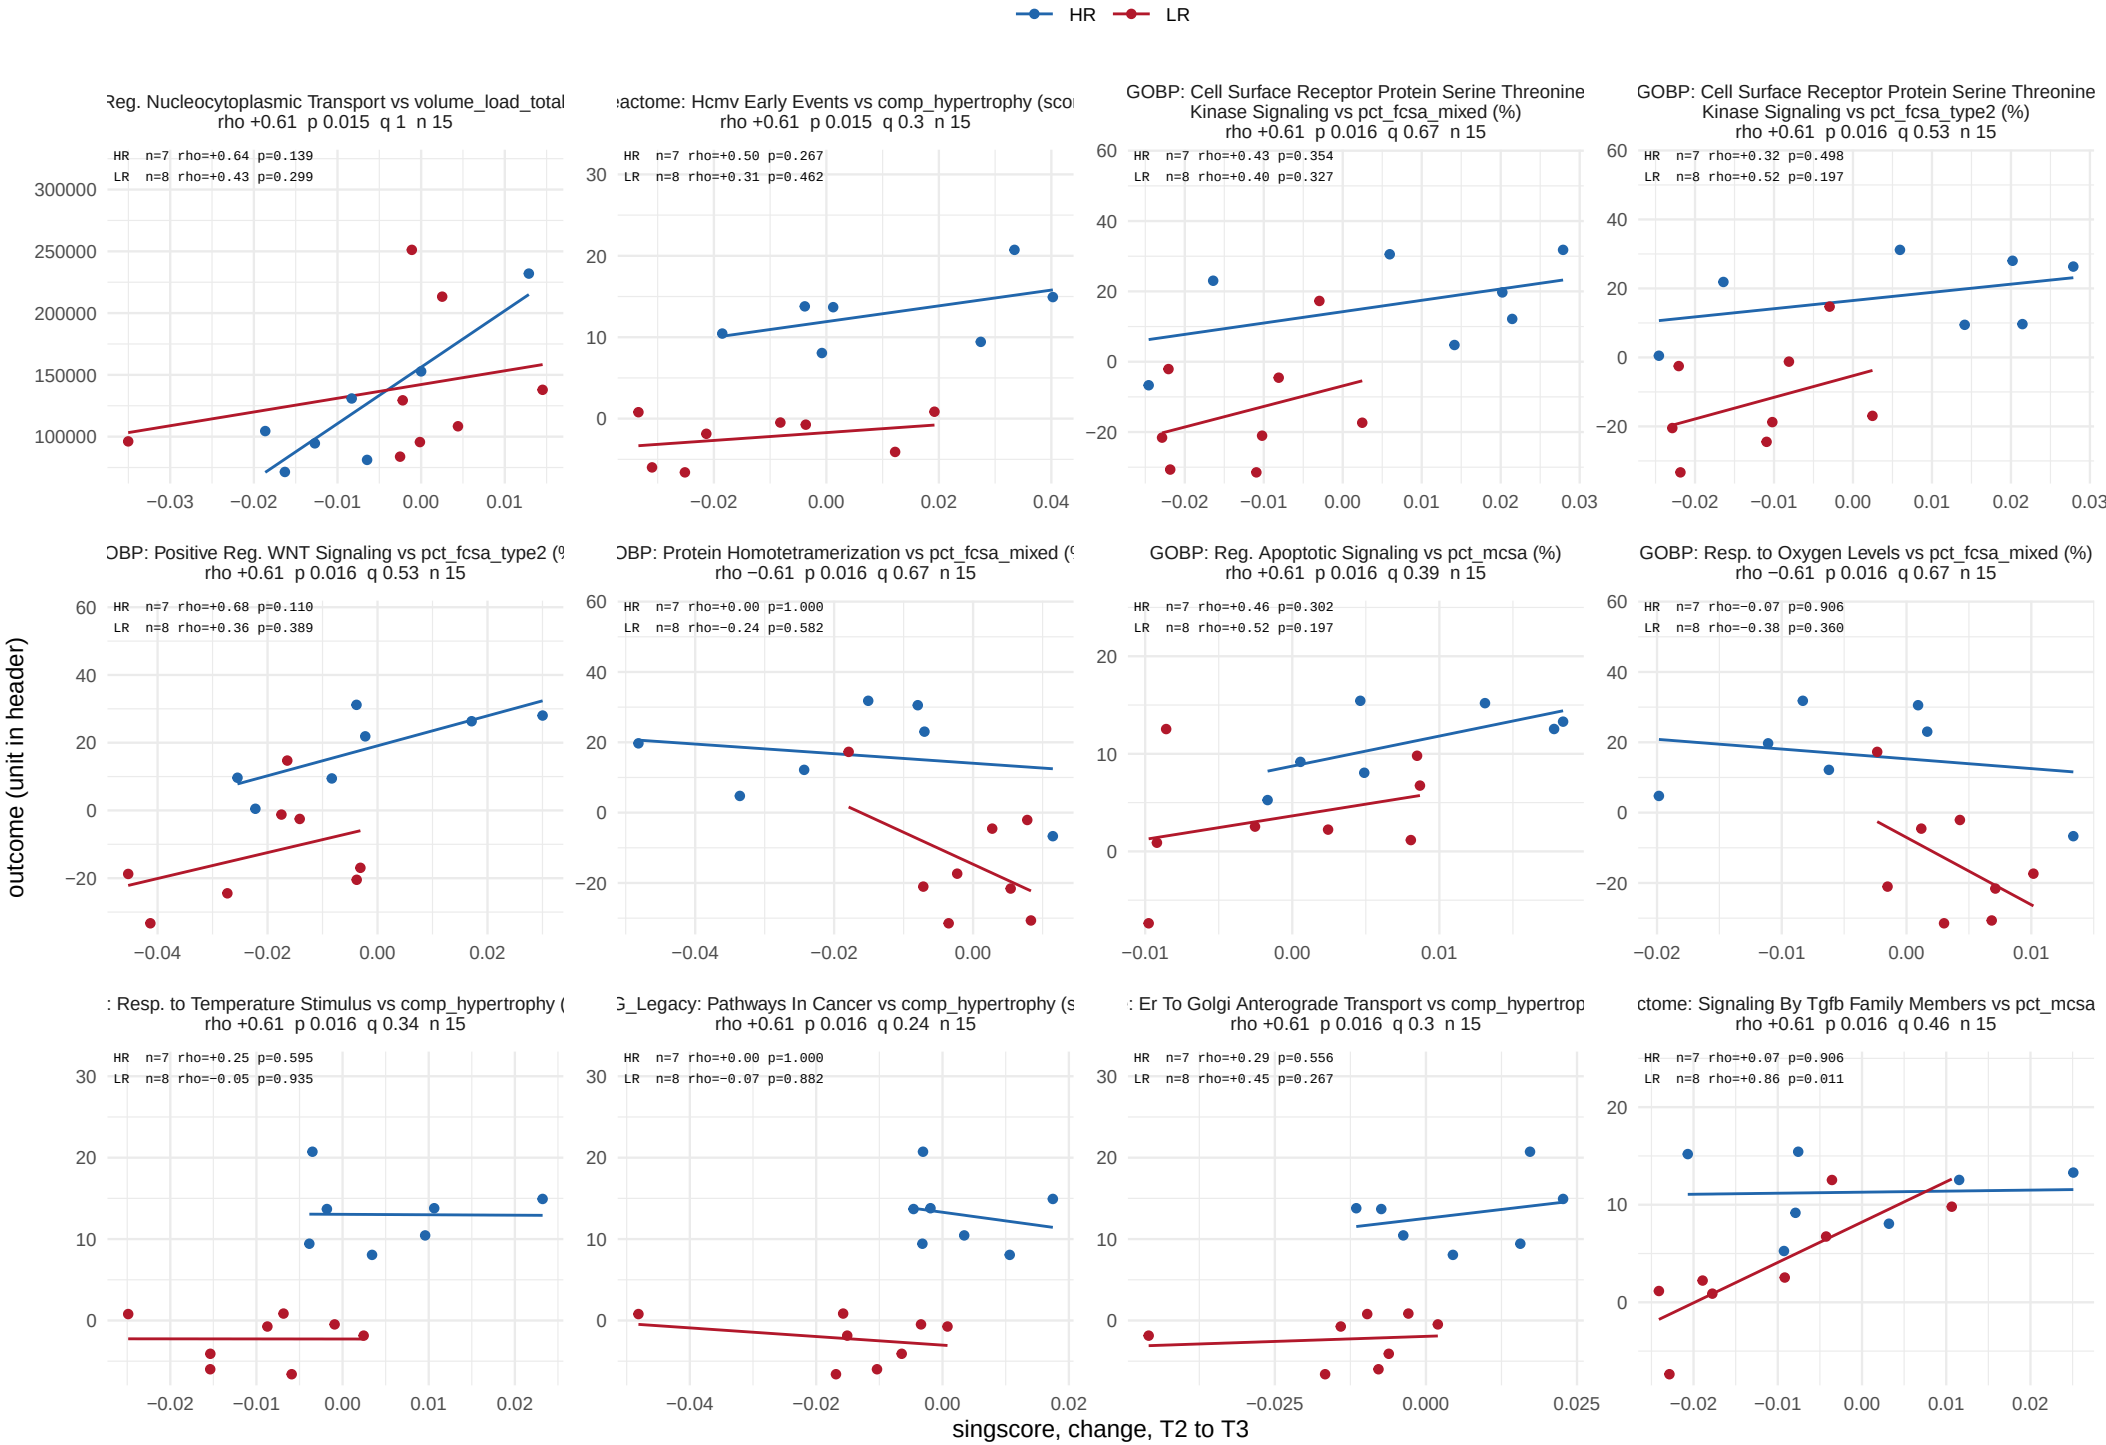


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, acute window


573 of 11024 feature−outcome pairs at p < 0.05, 4 at BH < 0.05. Page 20 of 48.

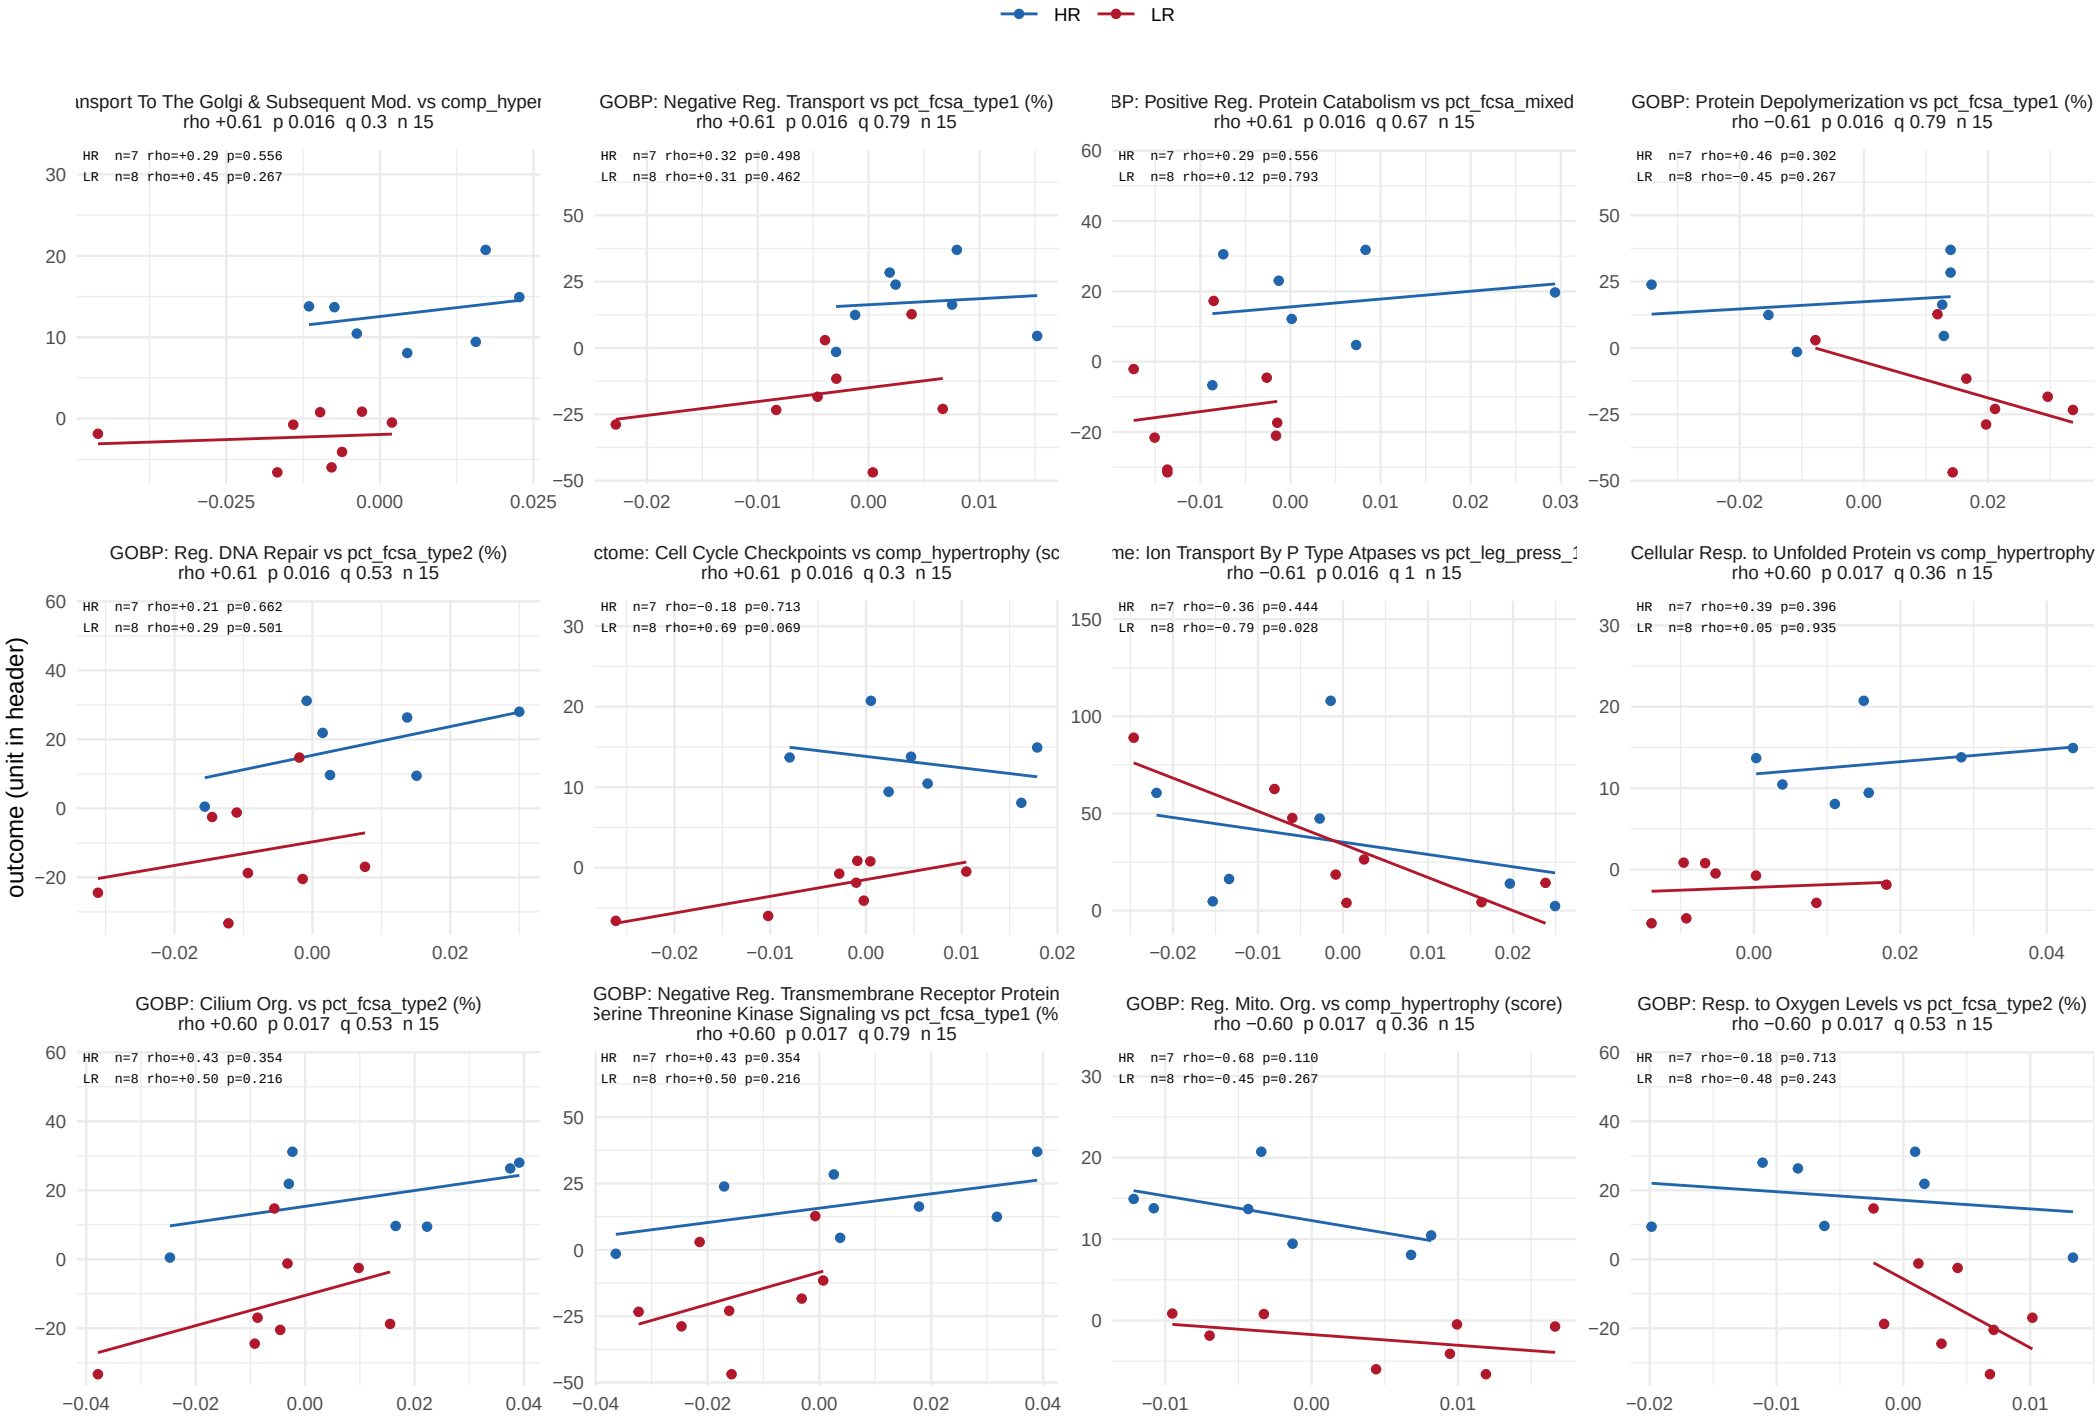


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, acute window


573 of 11024 feature−outcome pairs at p < 0.05, 4 at BH < 0.05. Page 21 of 48.

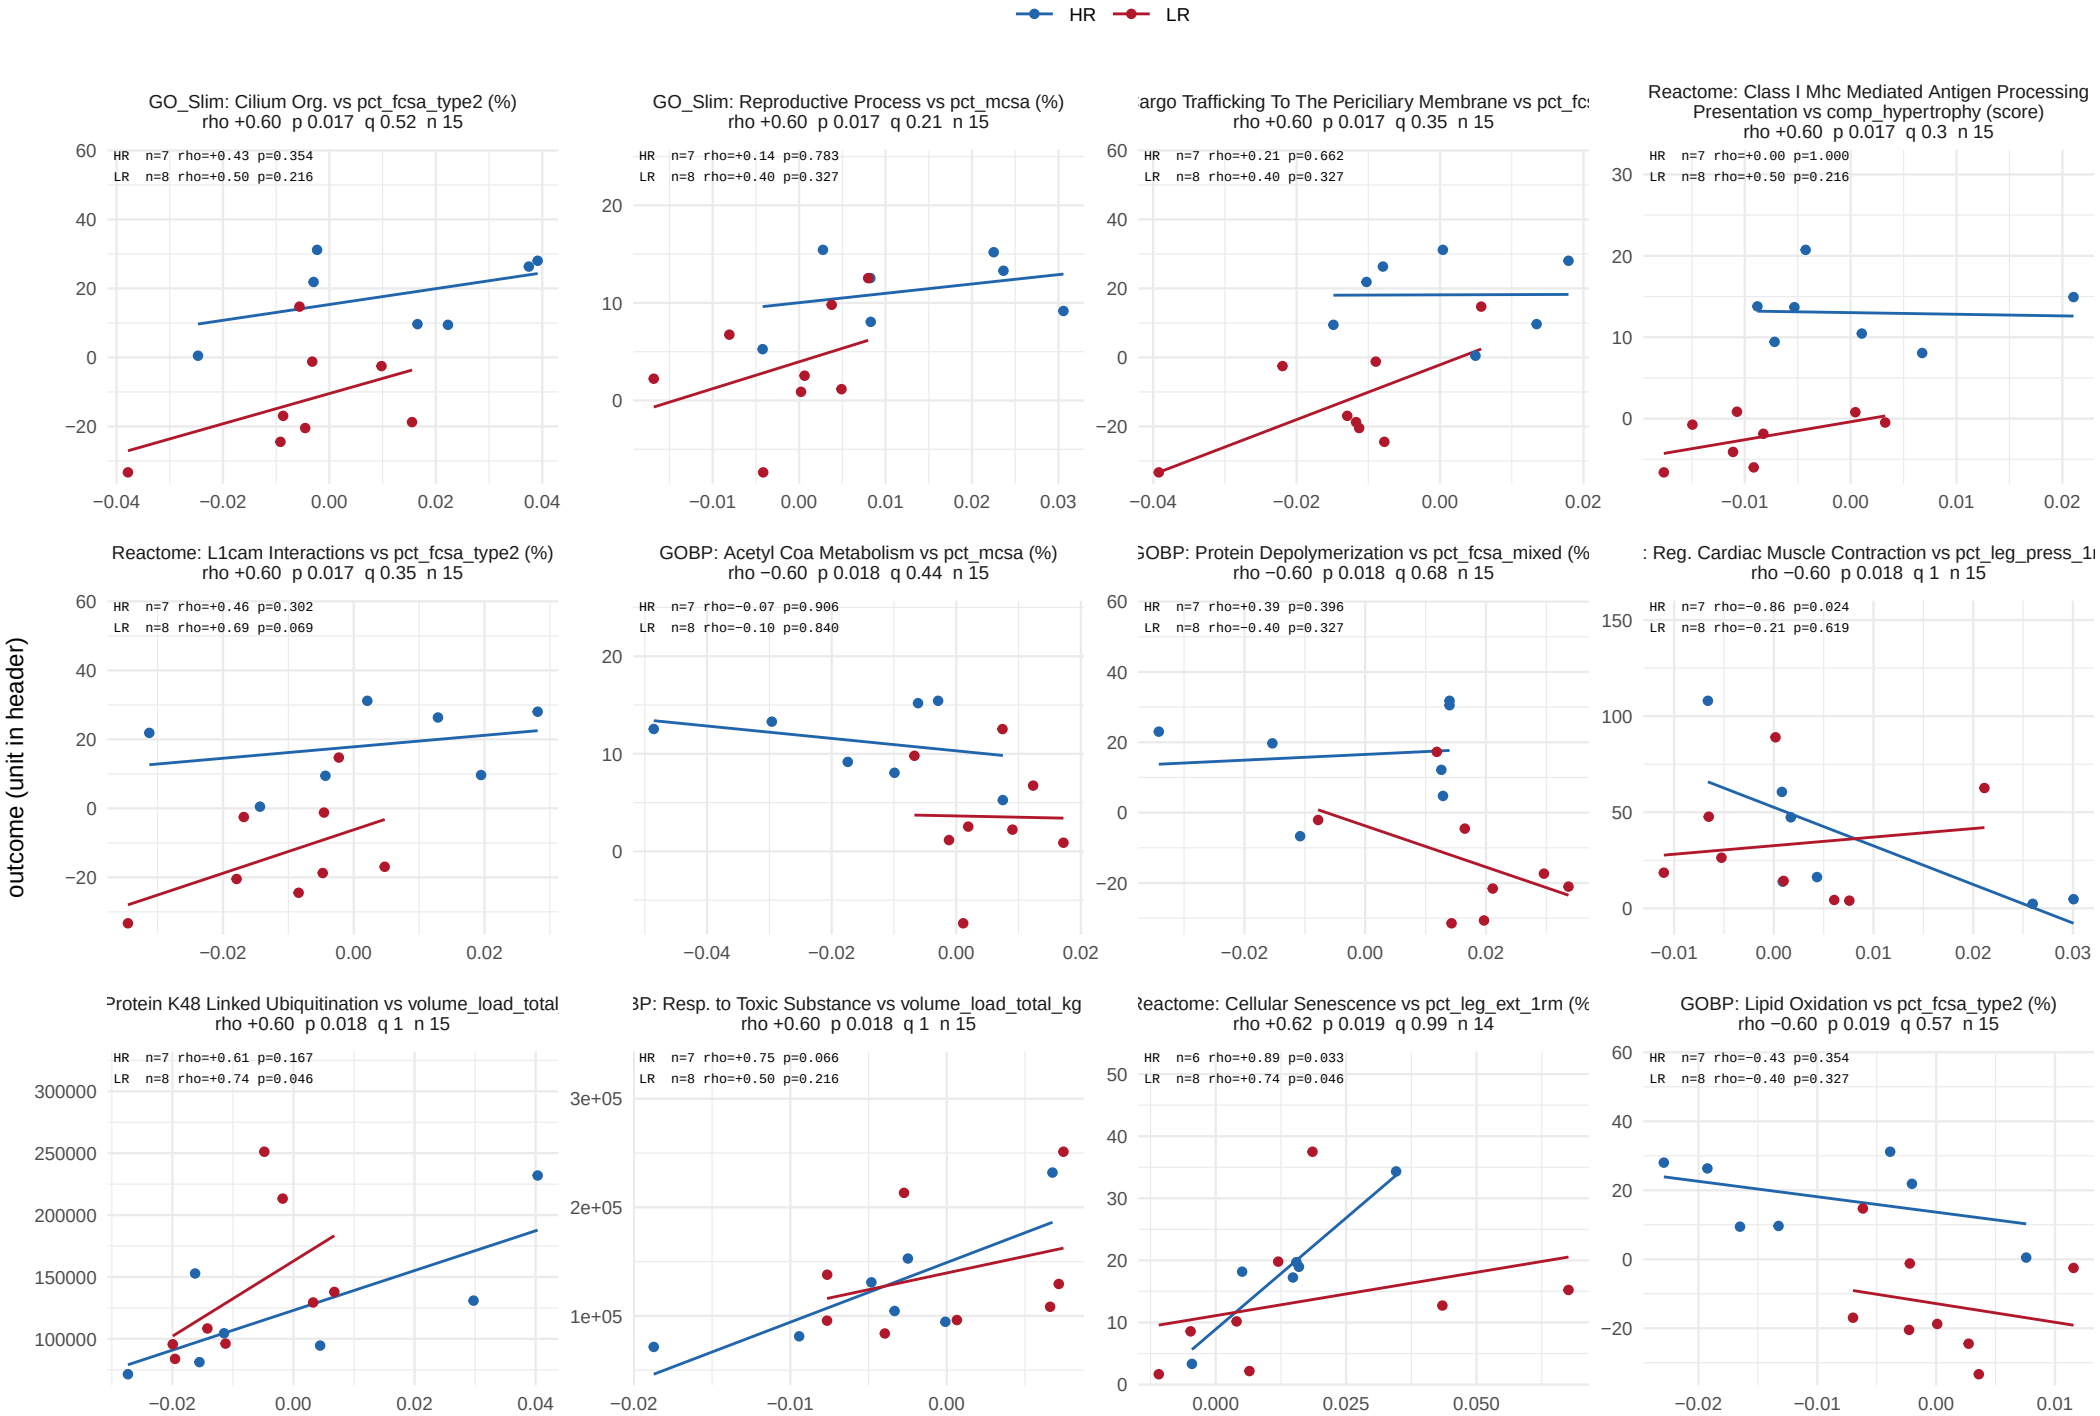


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, acute window


573 of 11024 feature−outcome pairs at p < 0.05, 4 at BH < 0.05. Page 22 of 48.

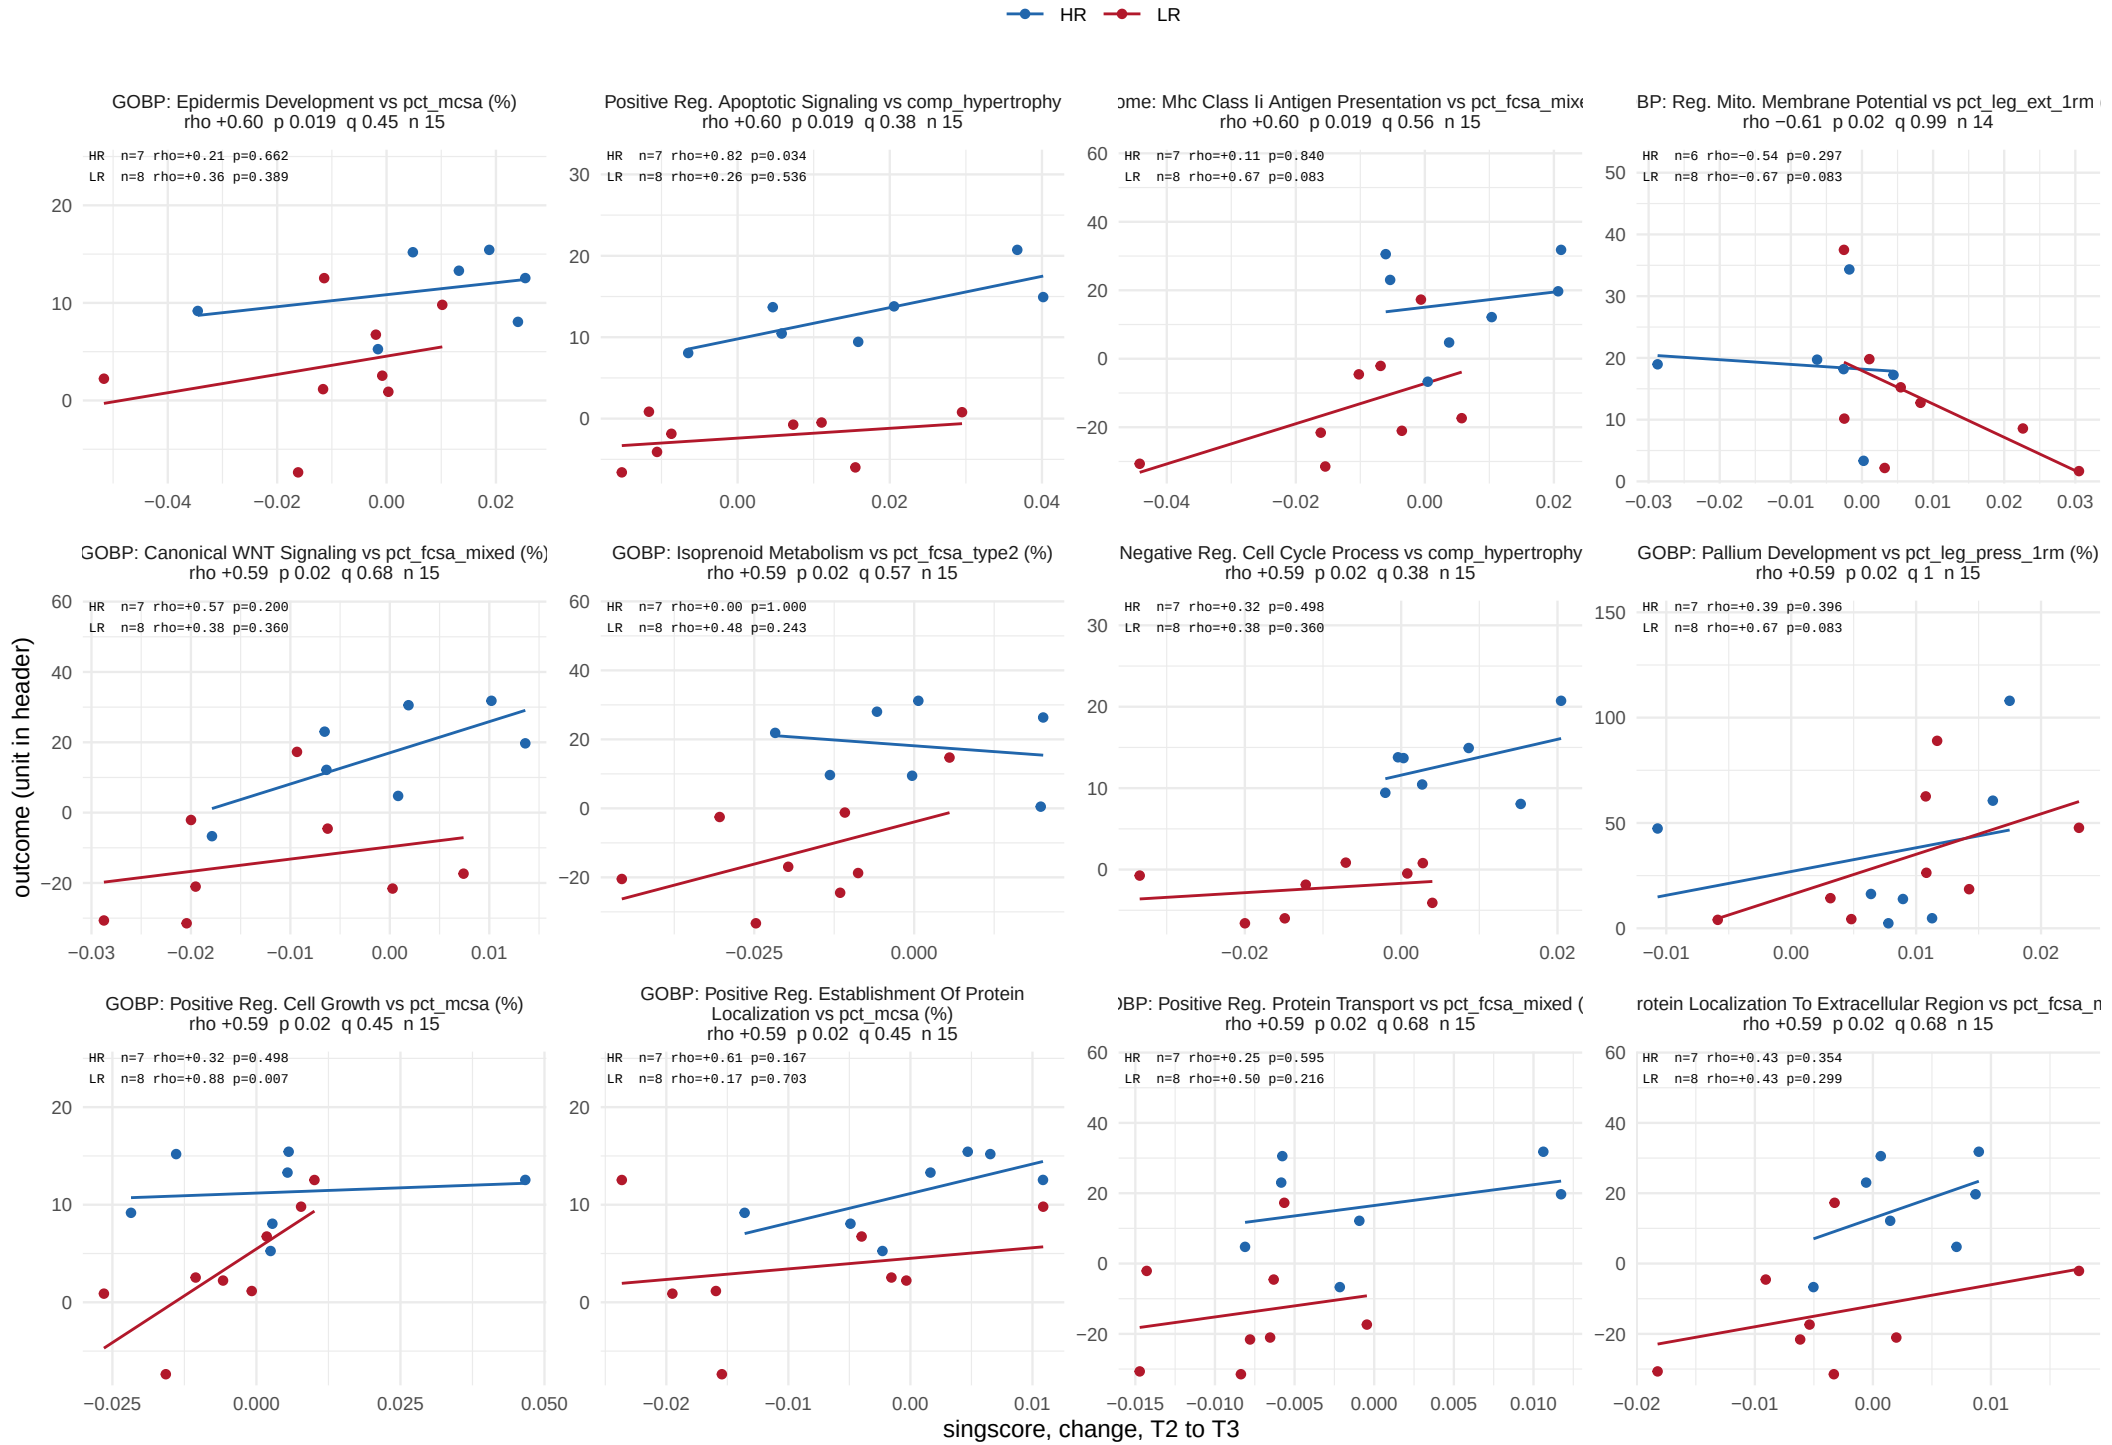


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, acute window


573 of 11024 feature−outcome pairs at p < 0.05, 4 at BH < 0.05. Page 23 of 48.

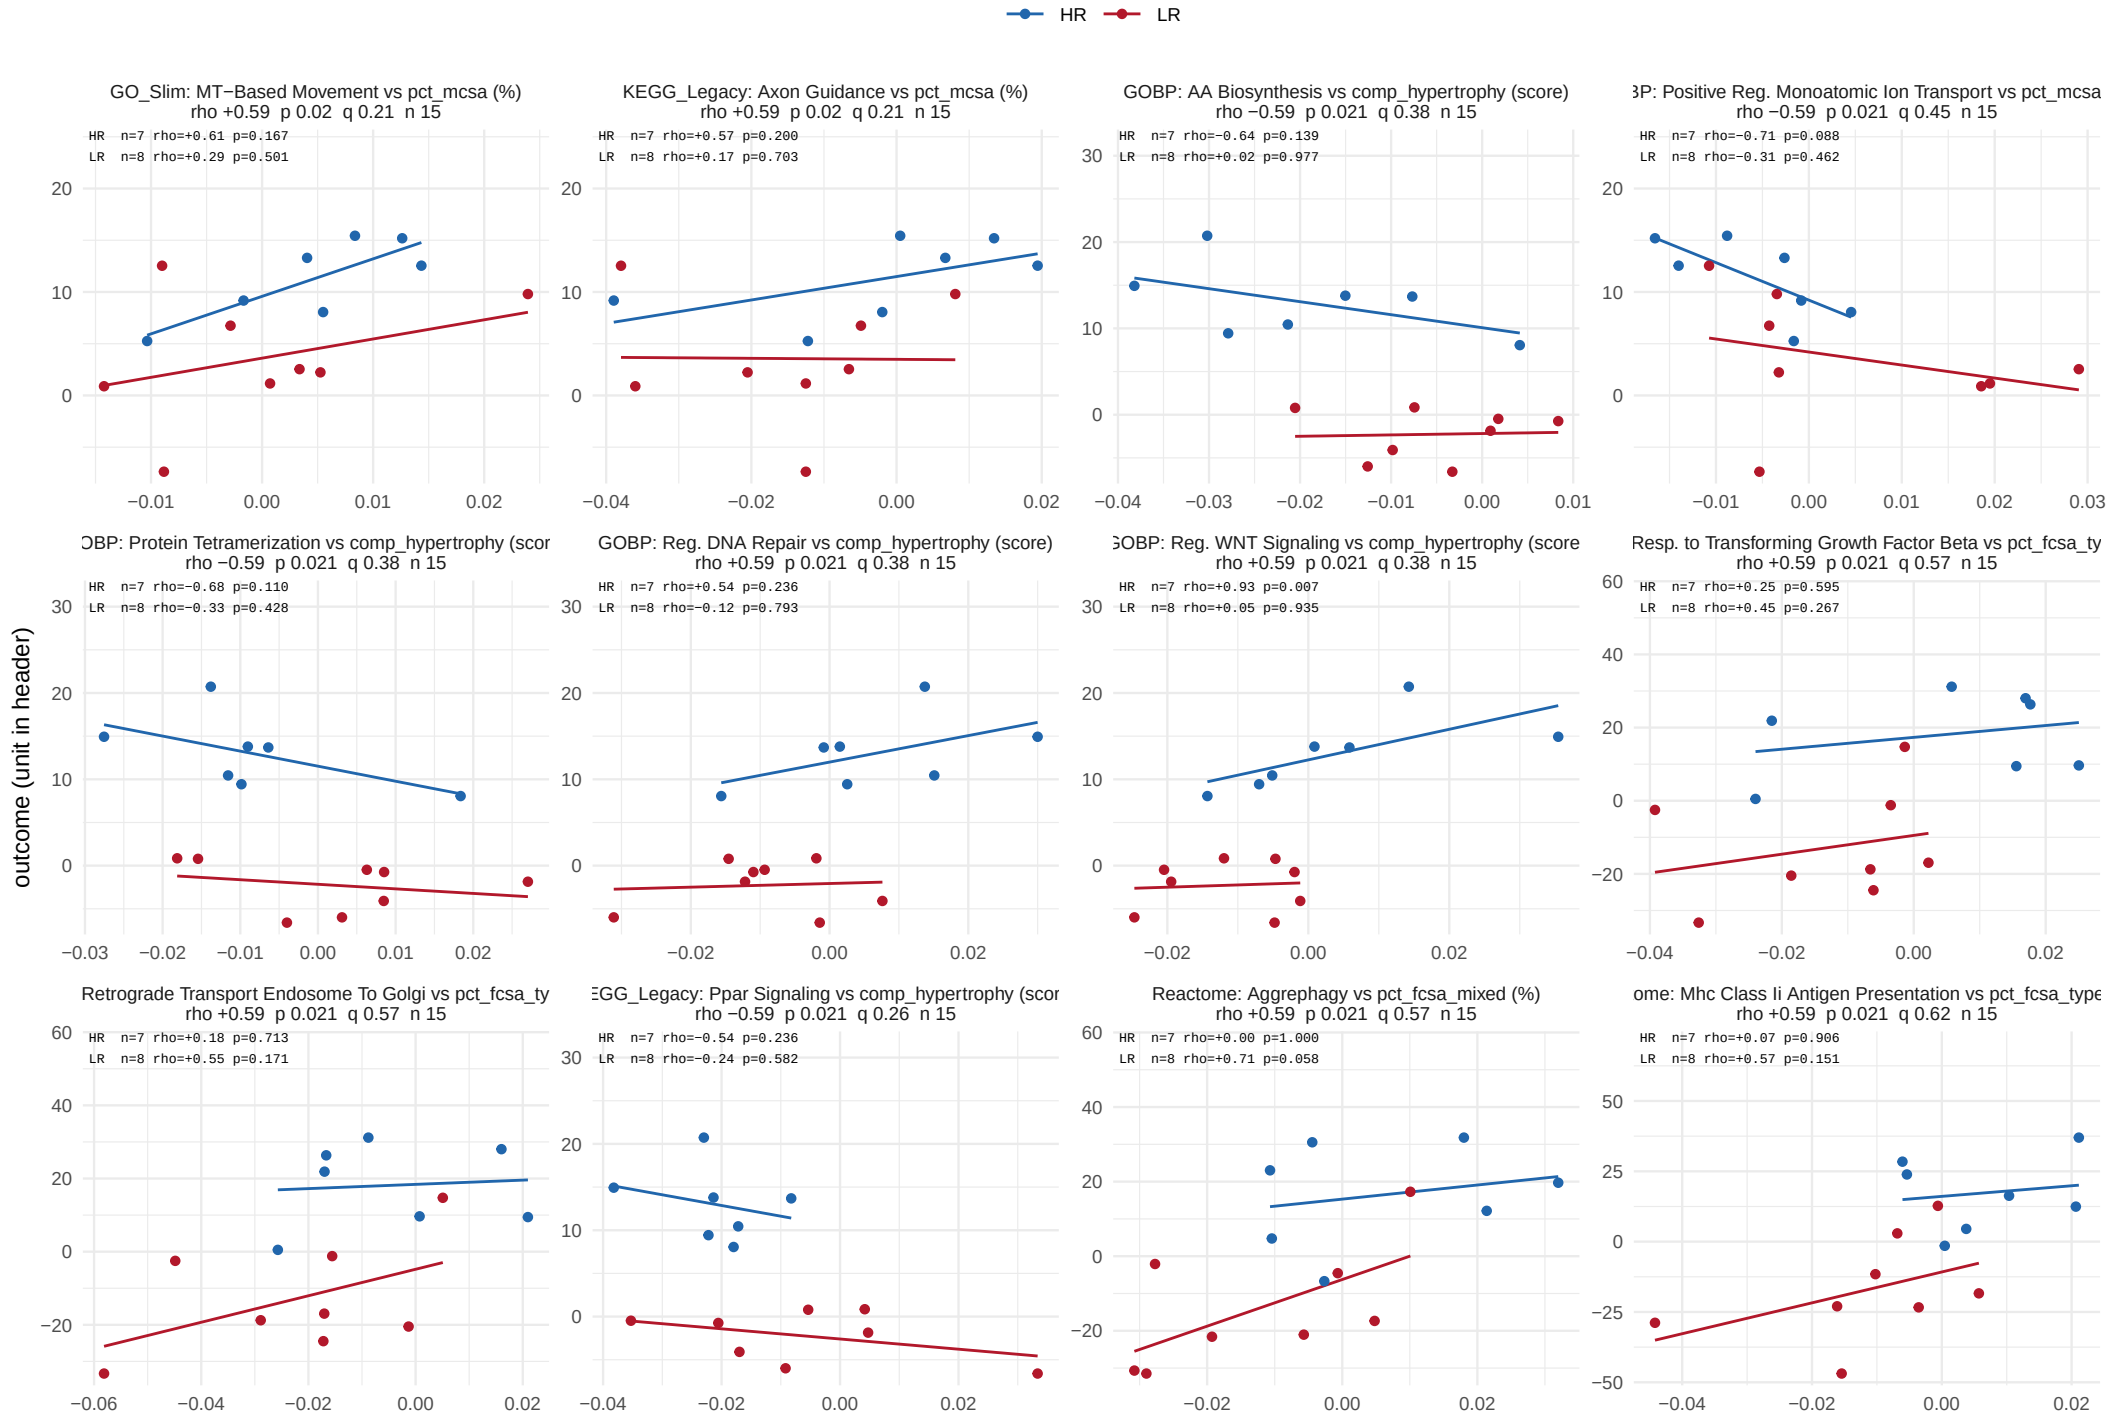


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, acute window


573 of 11024 feature−outcome pairs at p < 0.05, 4 at BH < 0.05. Page 24 of 48.

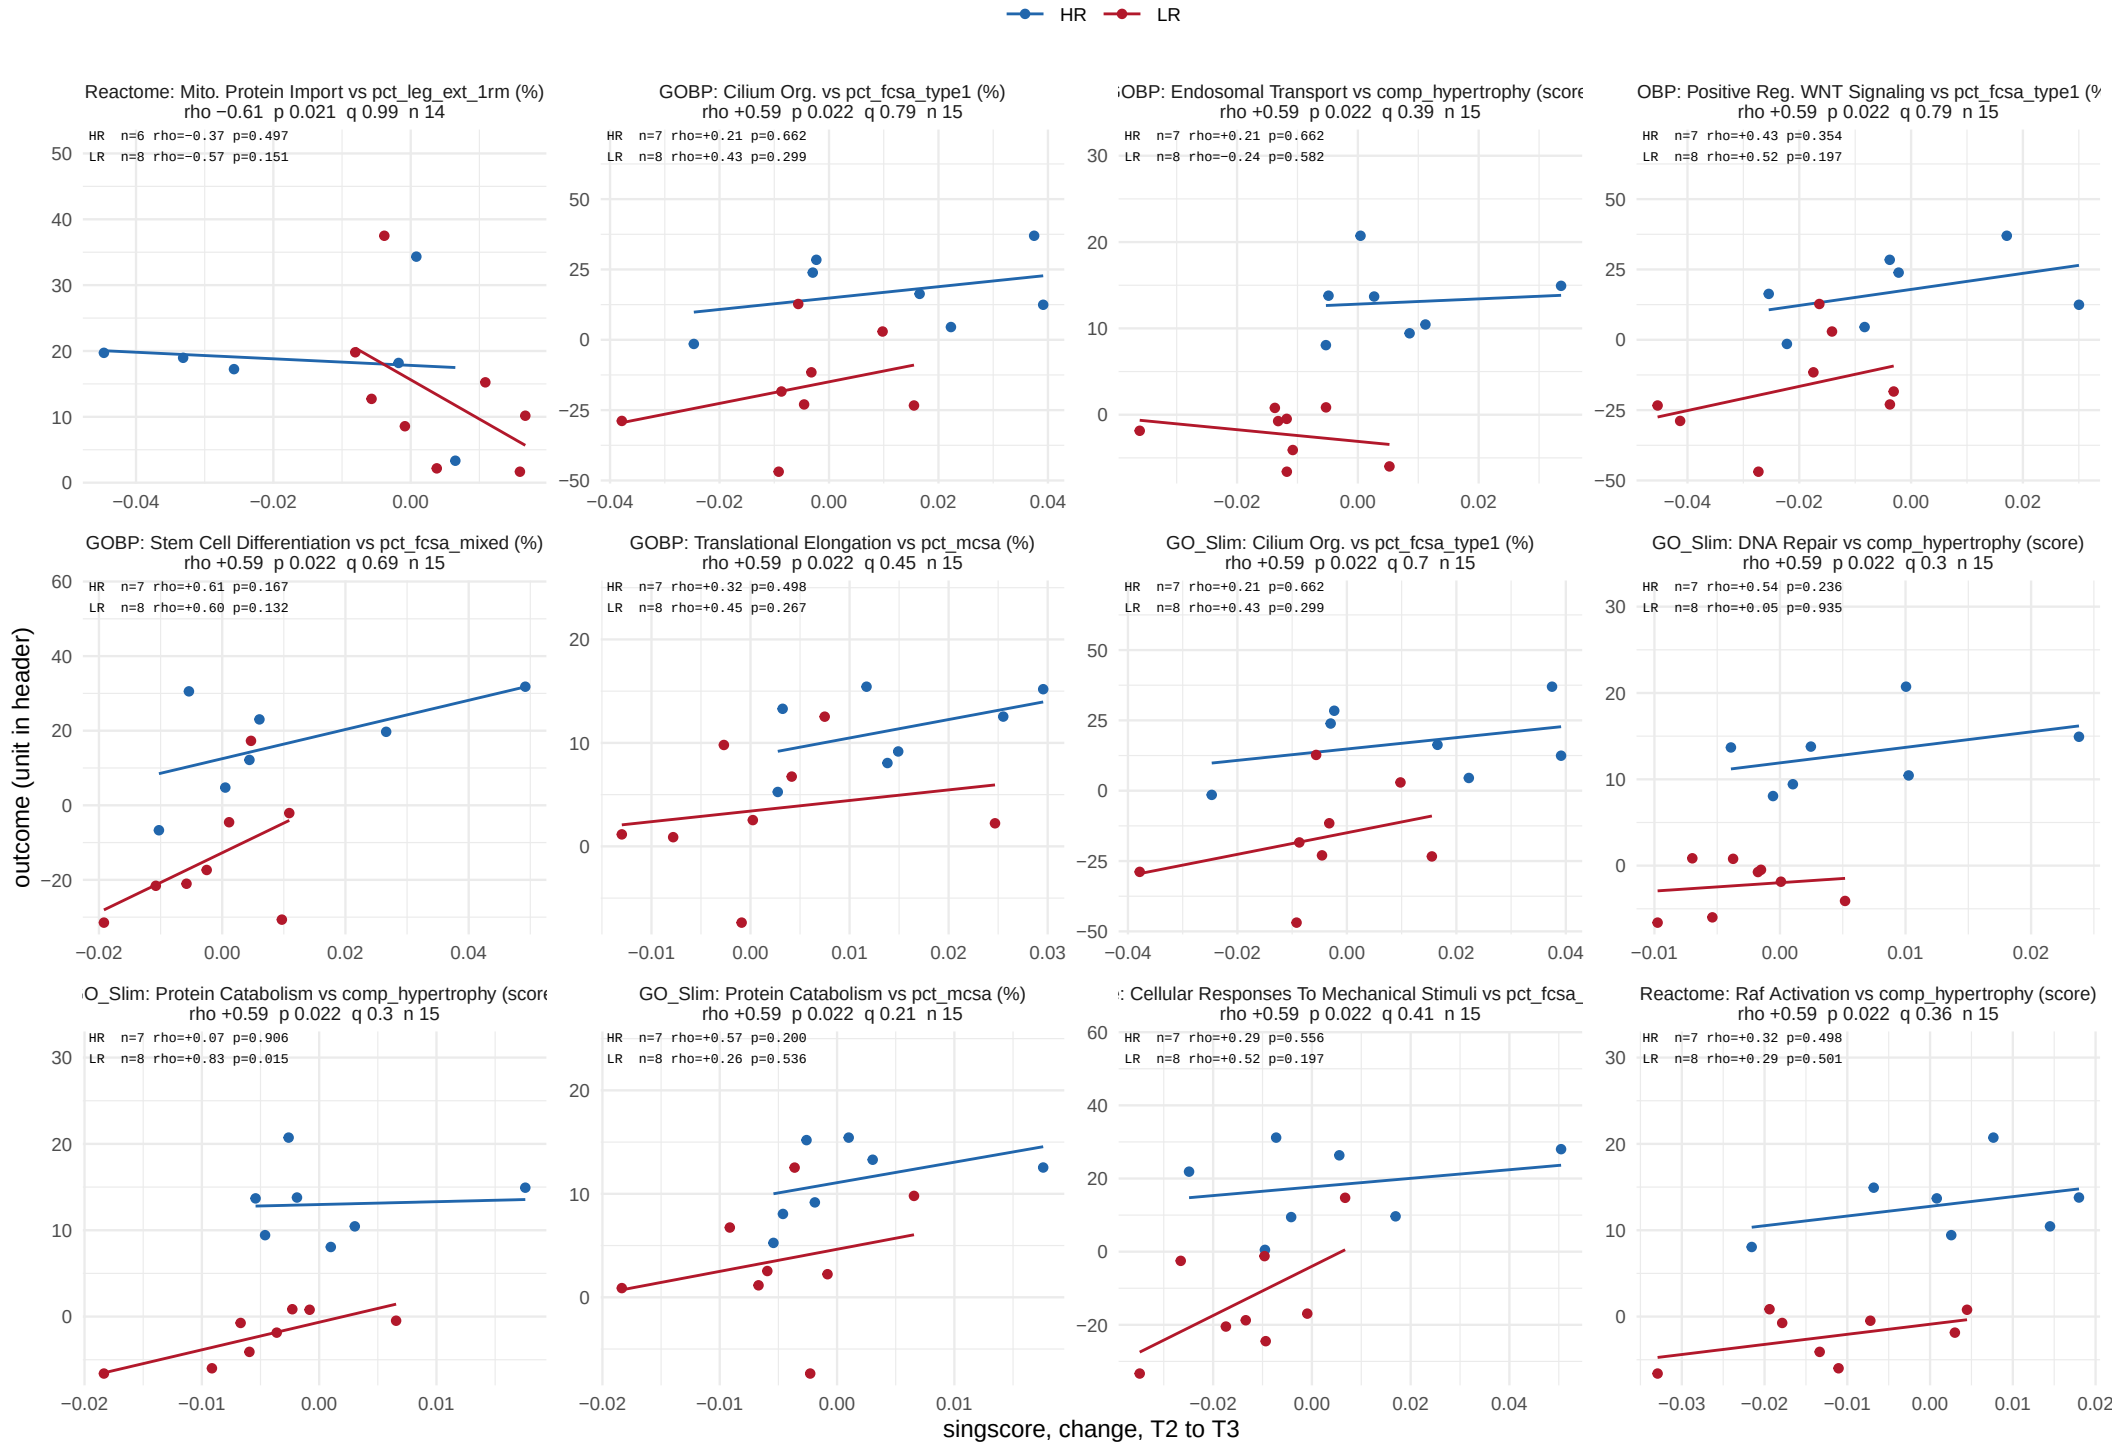


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, acute window


573 of 11024 feature−outcome pairs at p < 0.05, 4 at BH < 0.05. Page 25 of 48.

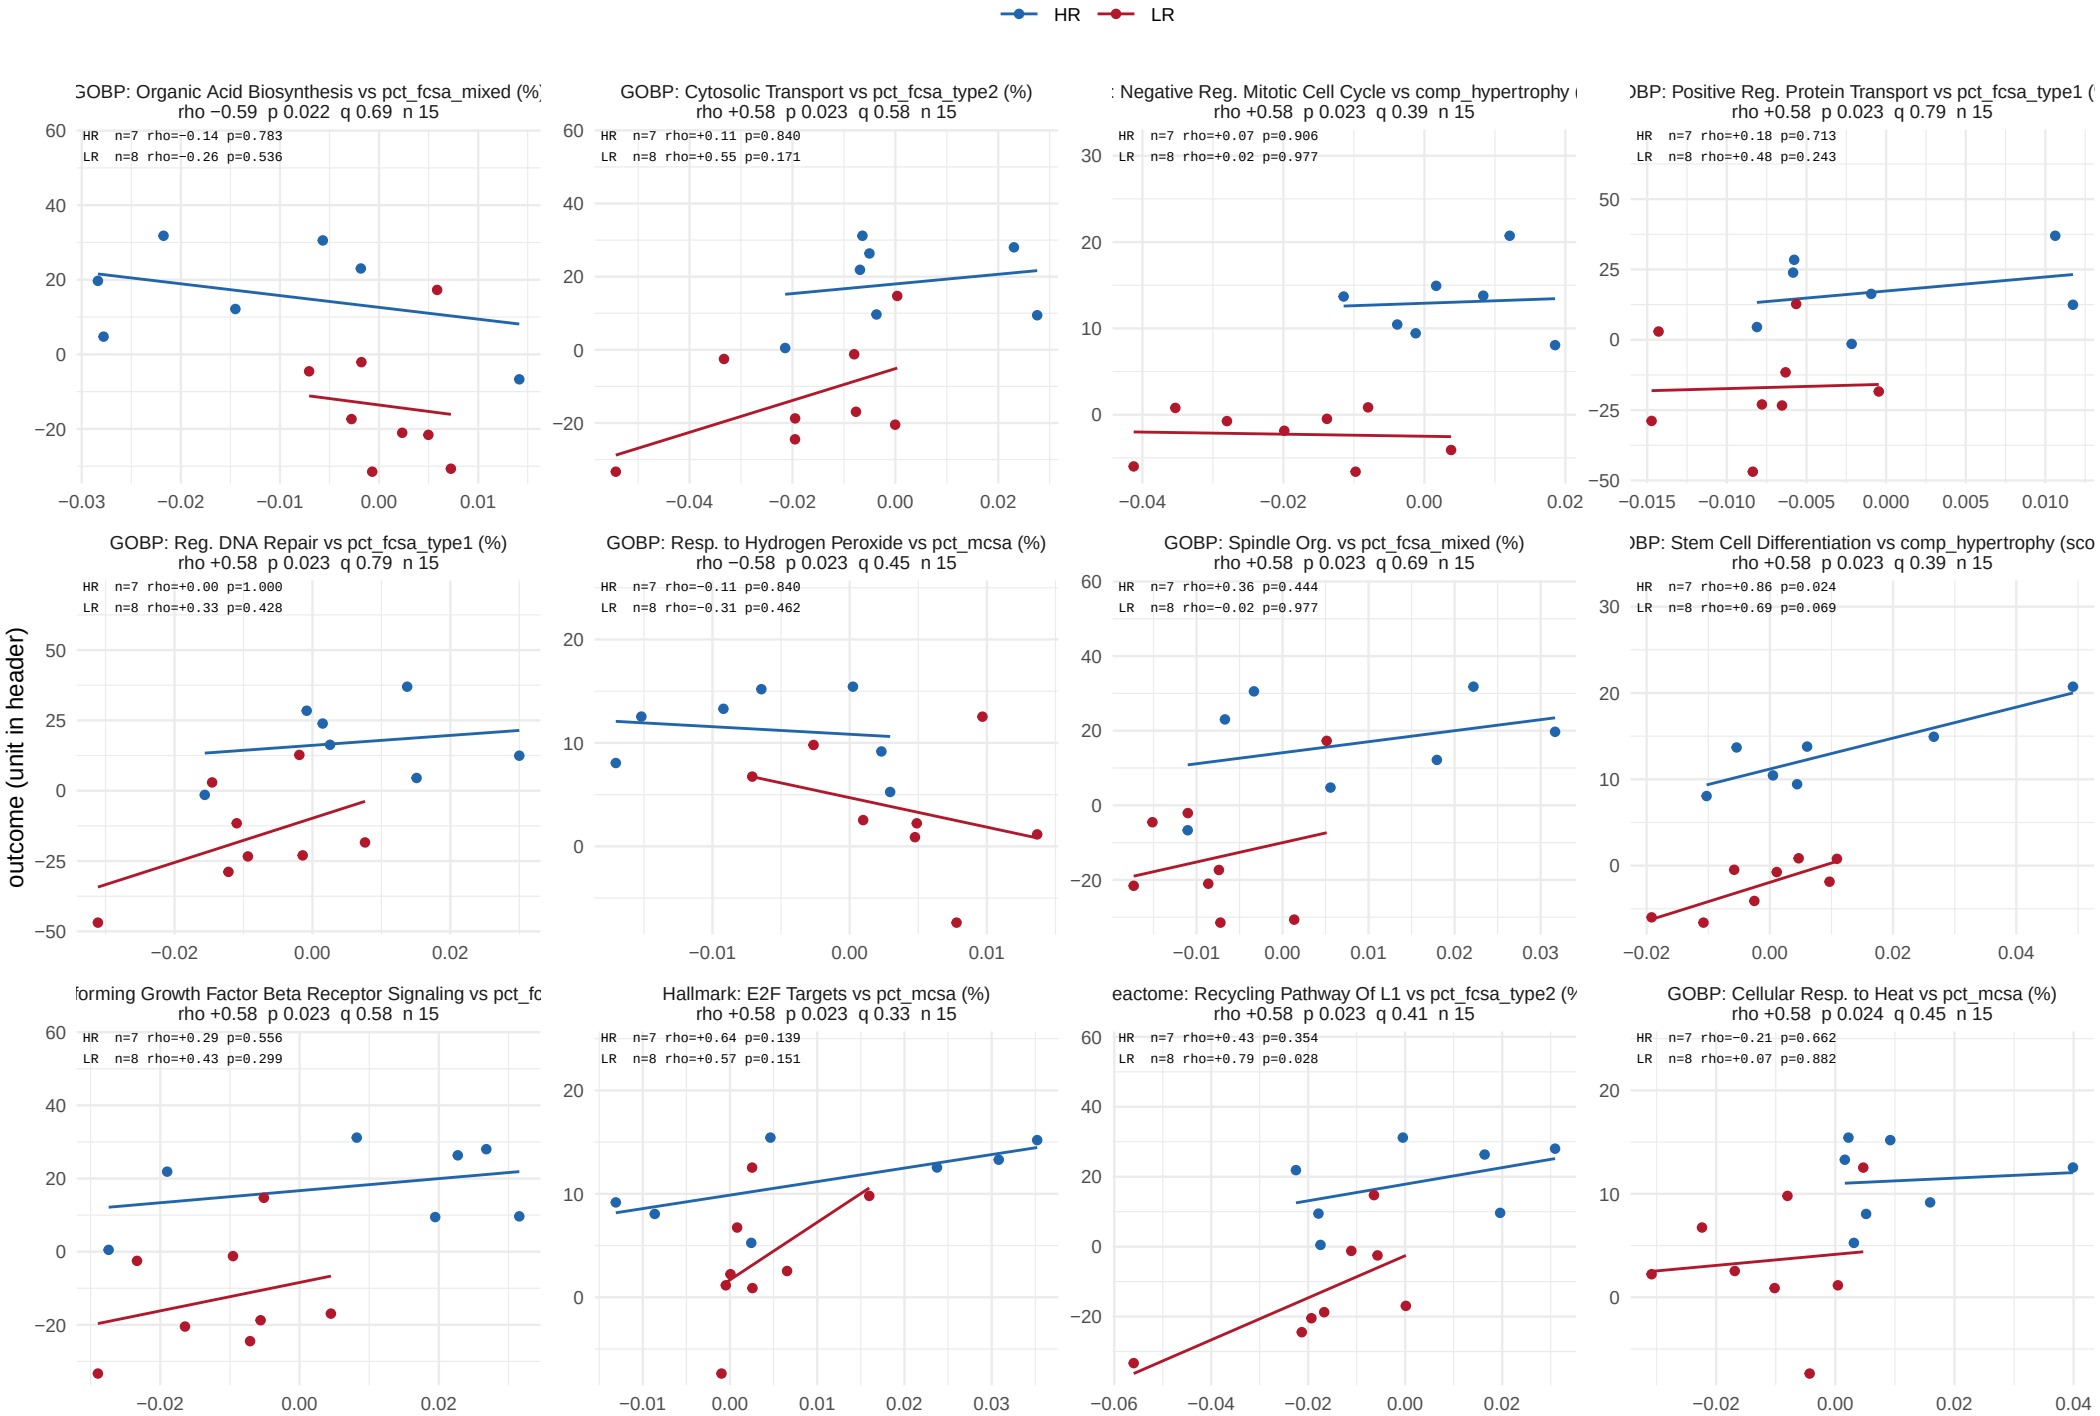


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, acute window


573 of 11024 feature−outcome pairs at p < 0.05, 4 at BH < 0.05. Page 26 of 48.

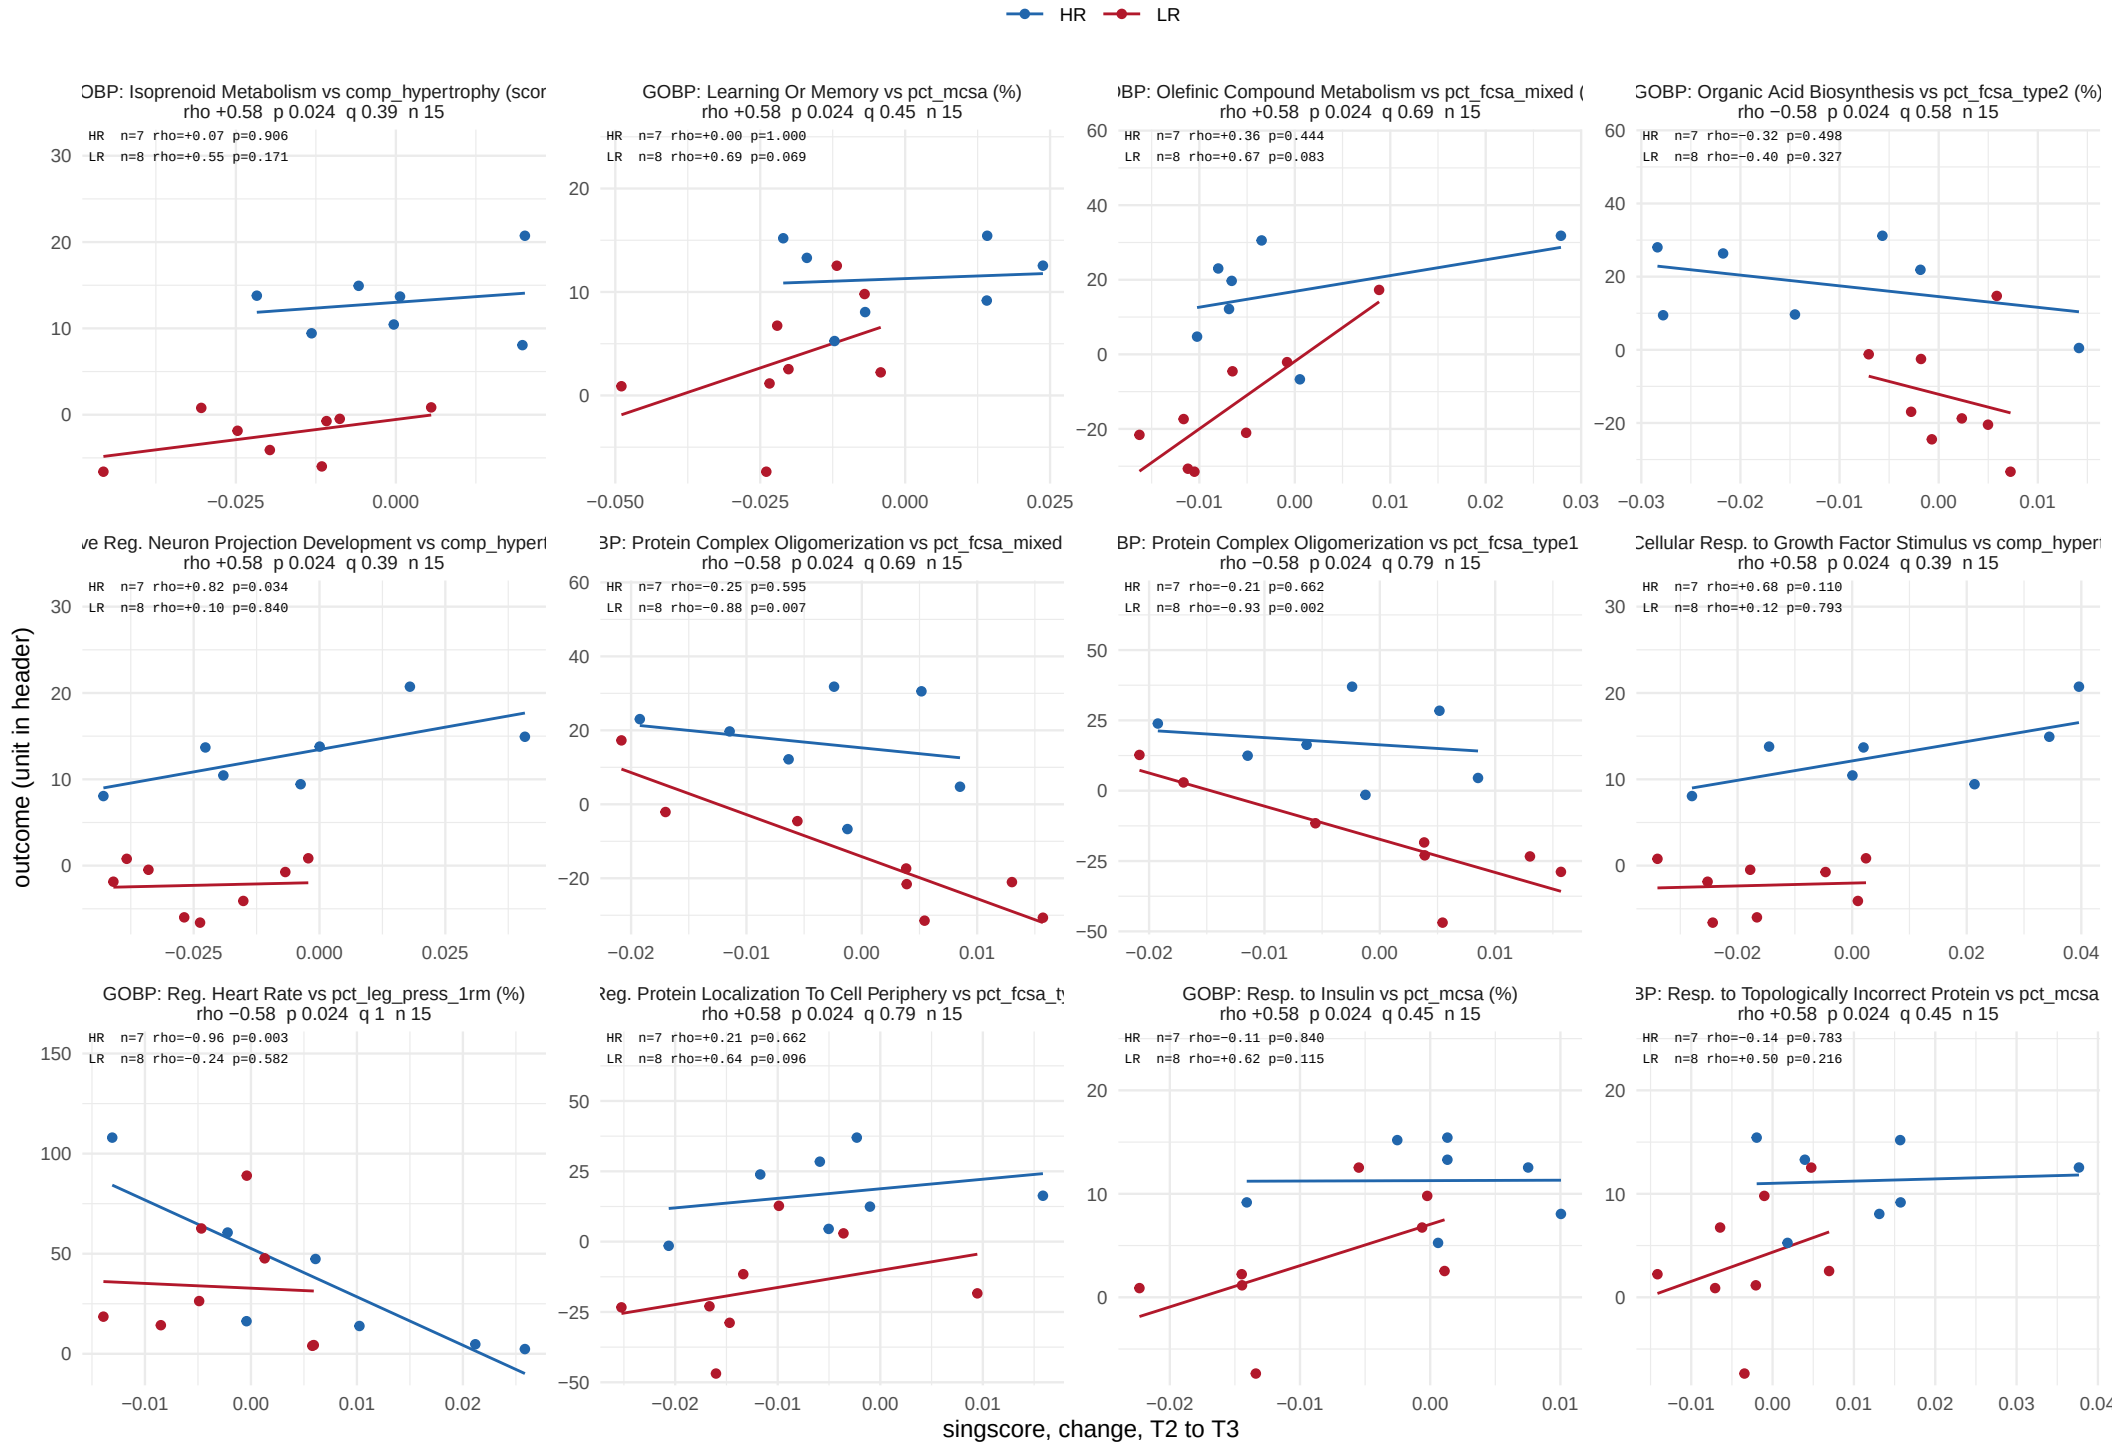


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, acute window


573 of 11024 feature−outcome pairs at p < 0.05, 4 at BH < 0.05. Page 27 of 48.

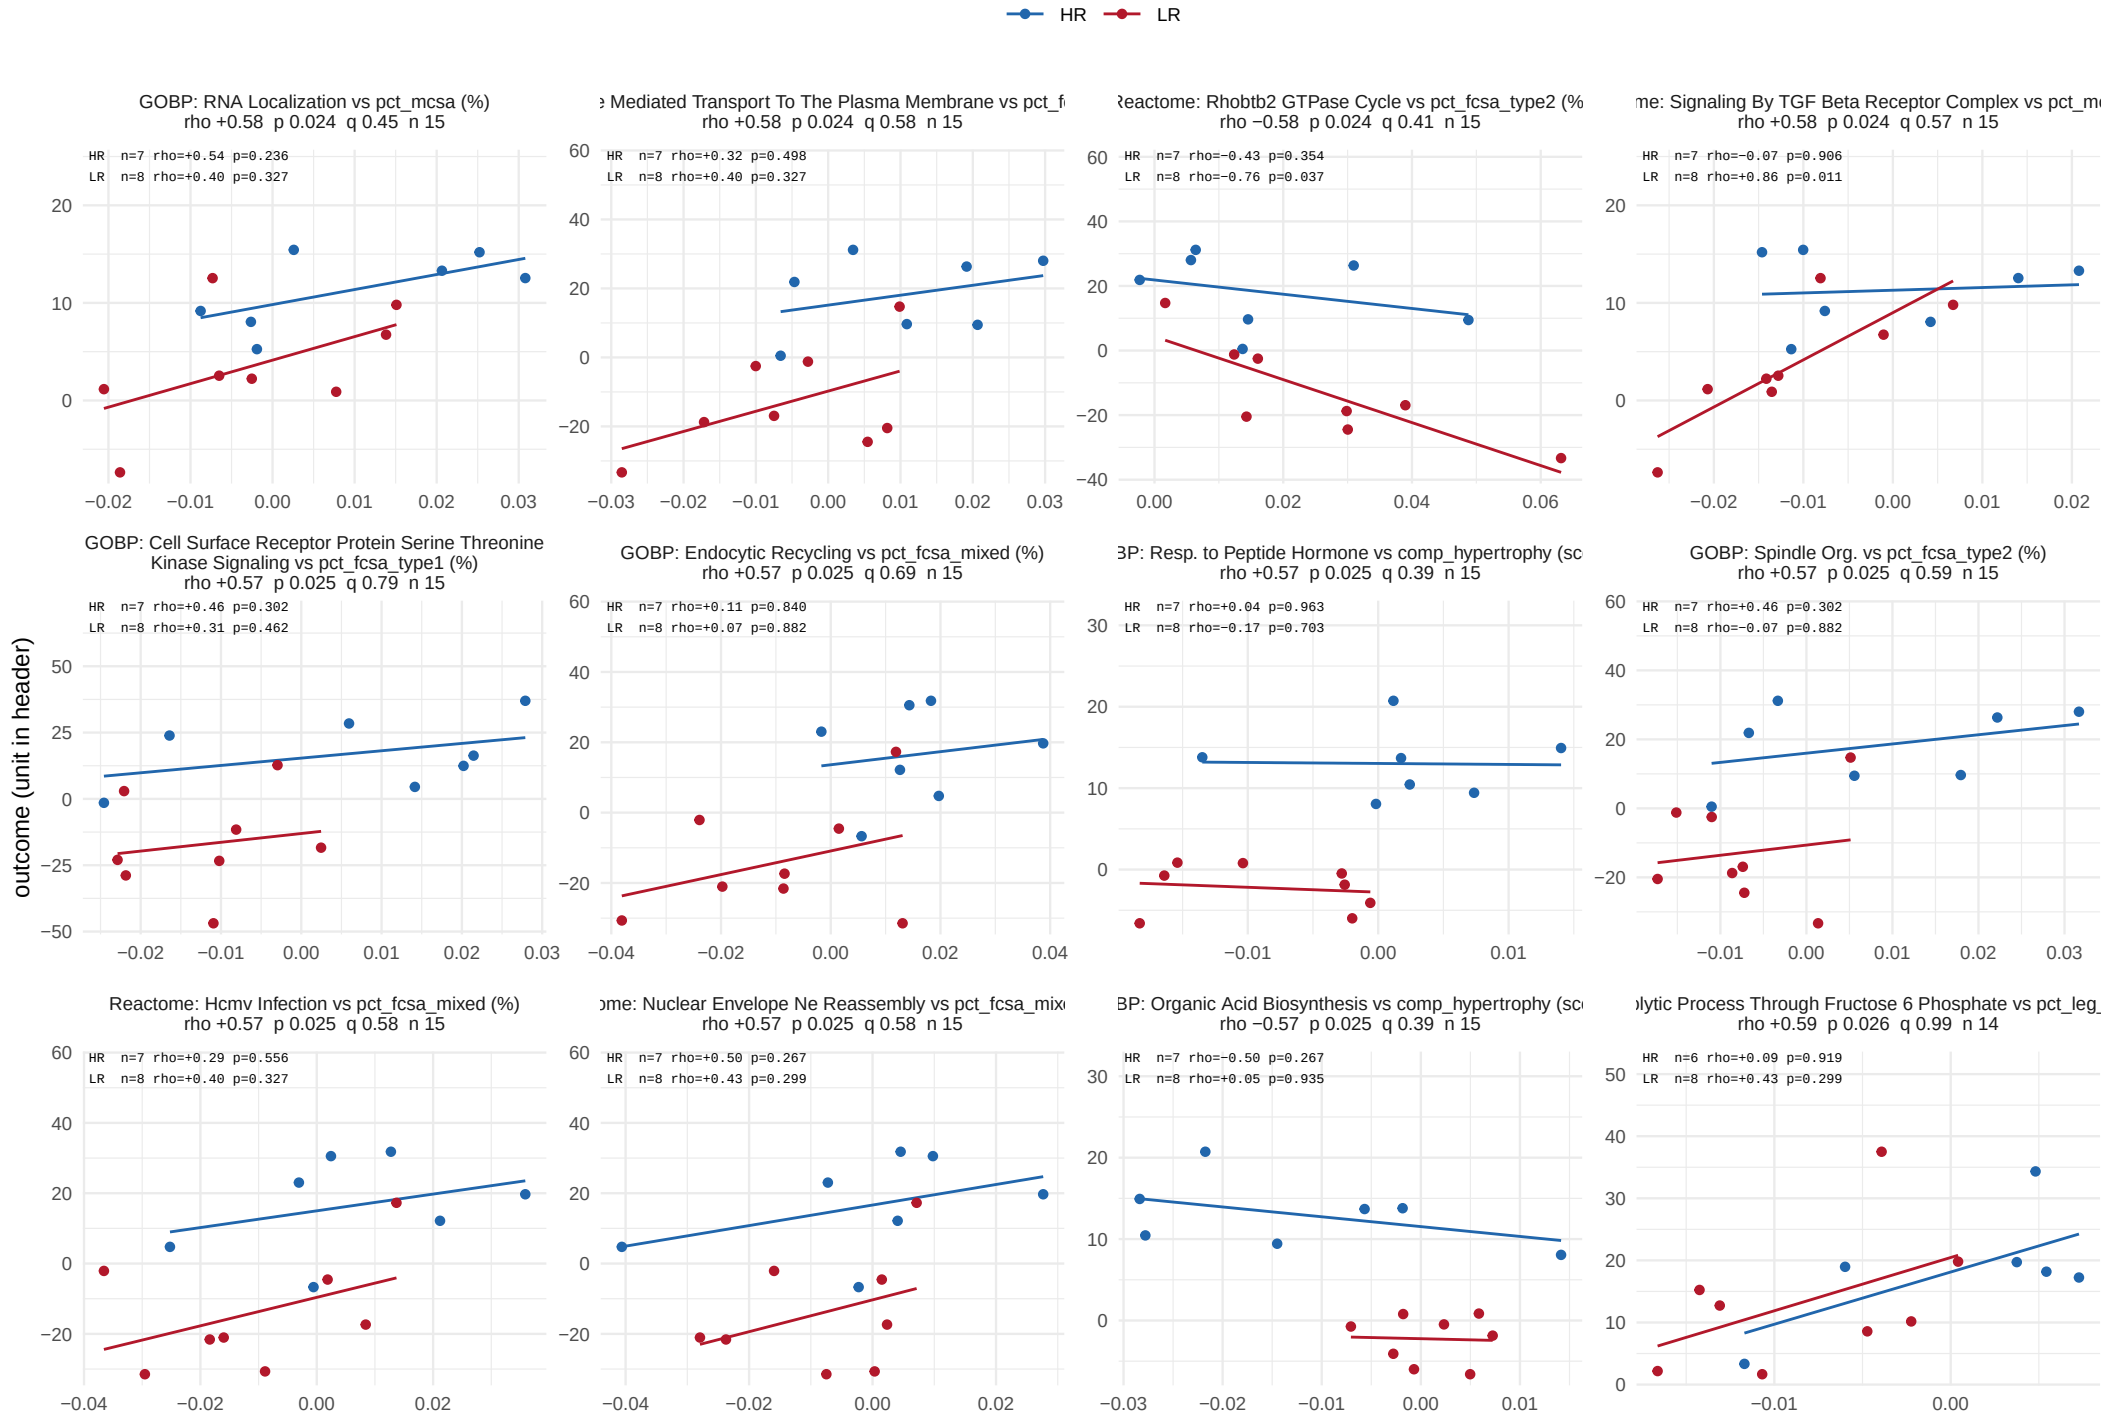


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, acute window


573 of 11024 feature−outcome pairs at p < 0.05, 4 at BH < 0.05. Page 28 of 48.

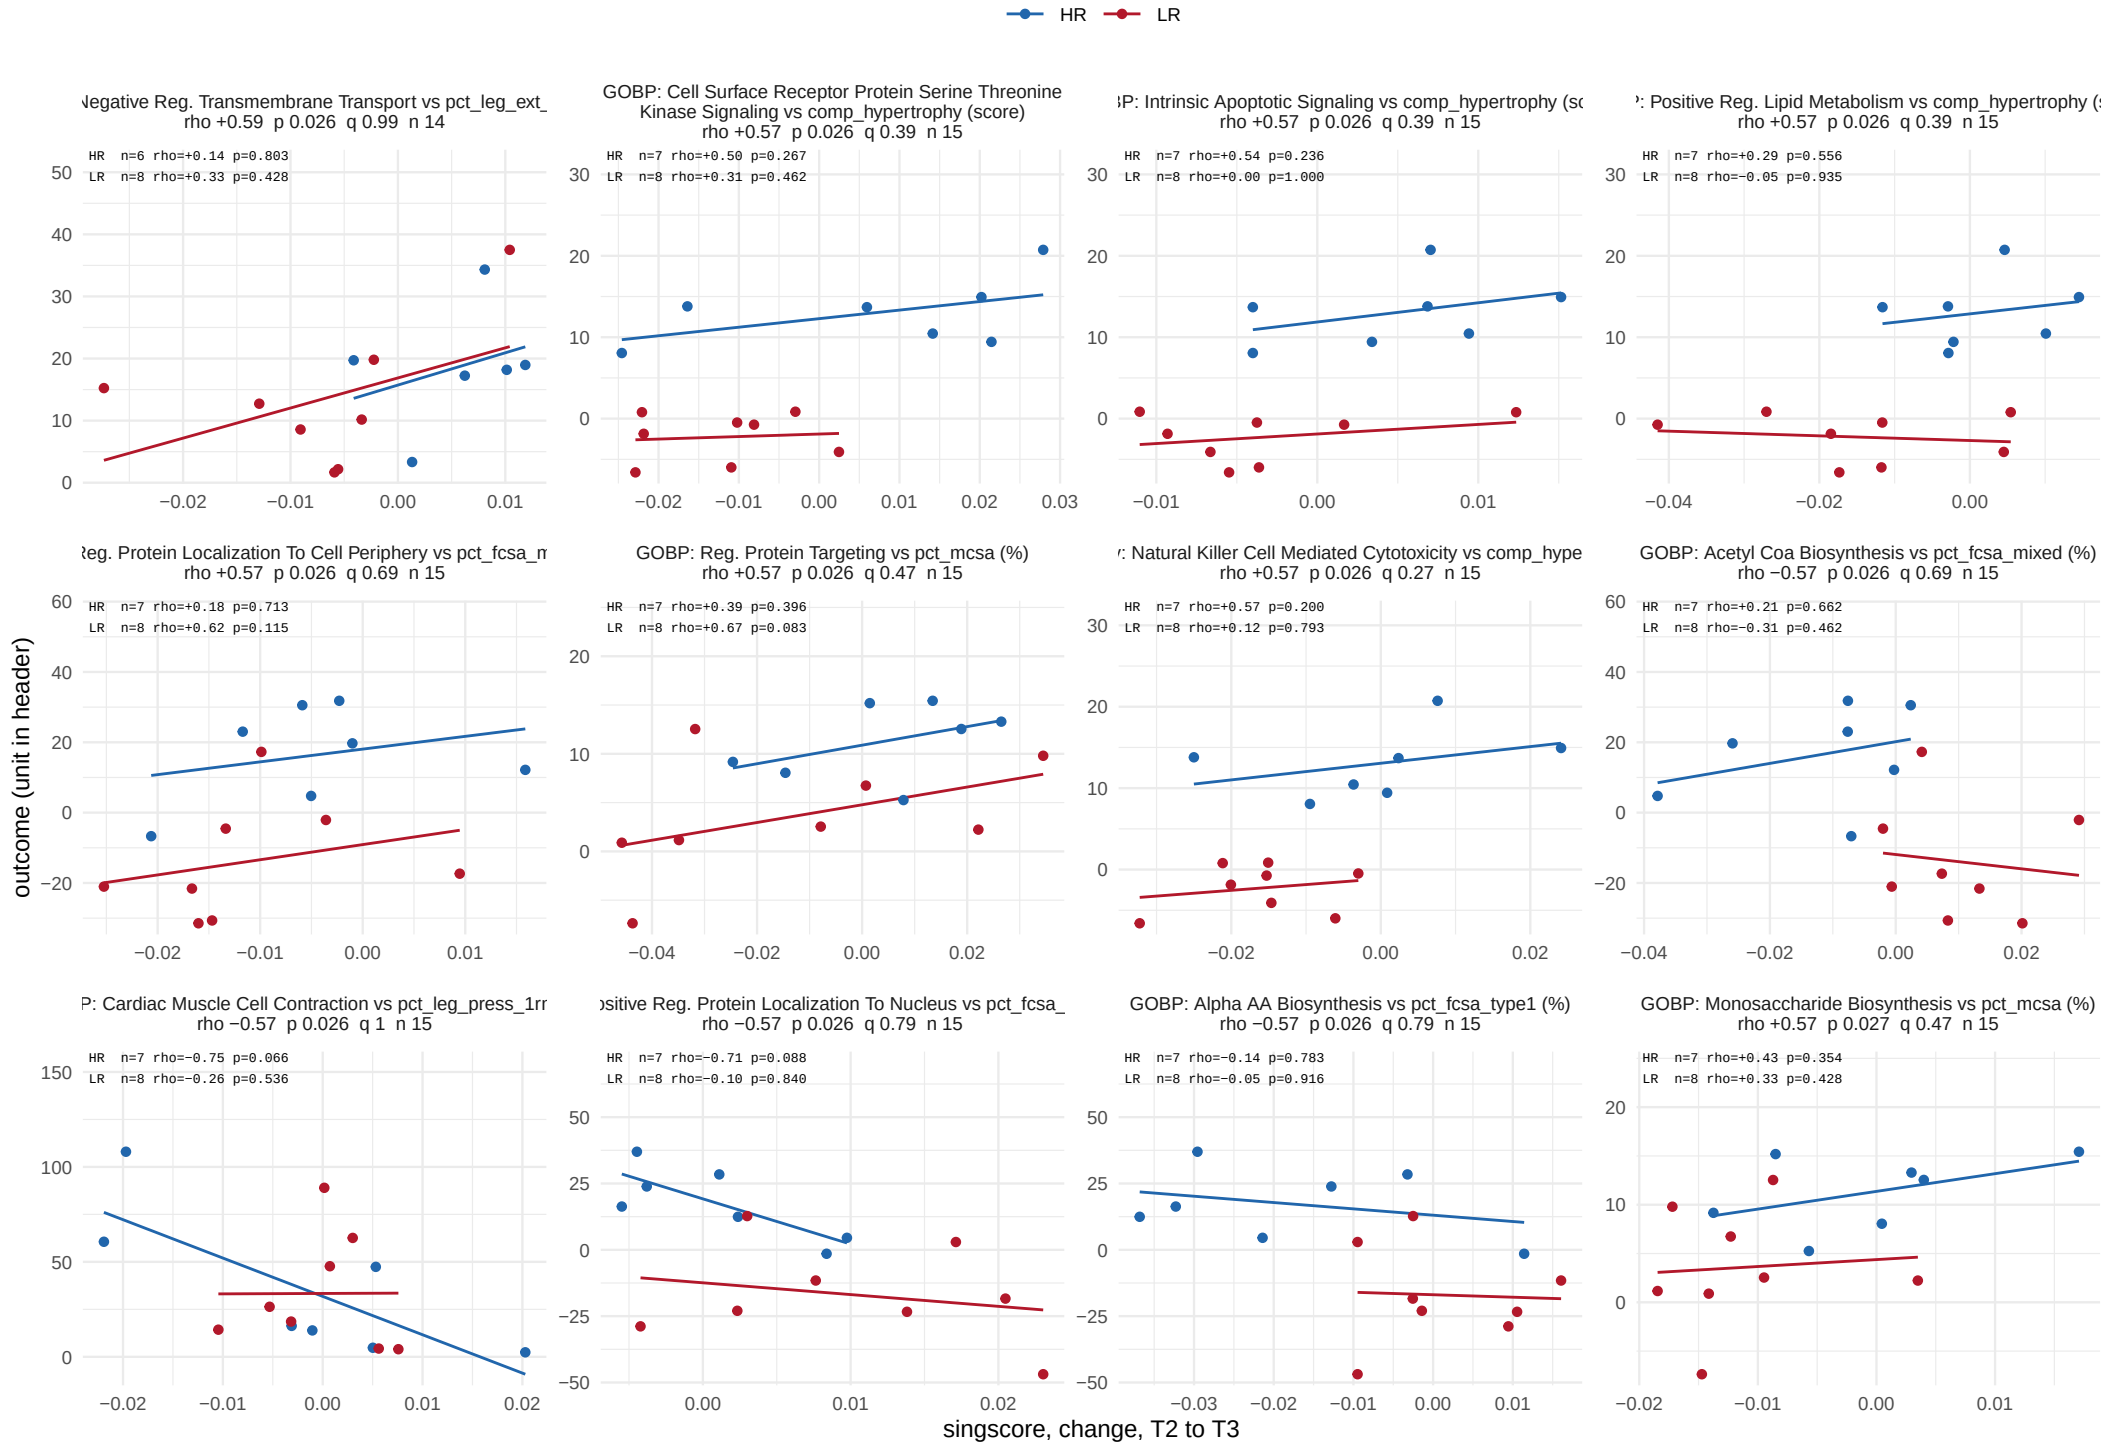


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, acute window


573 of 11024 feature−outcome pairs at p < 0.05, 4 at BH < 0.05. Page 29 of 48.

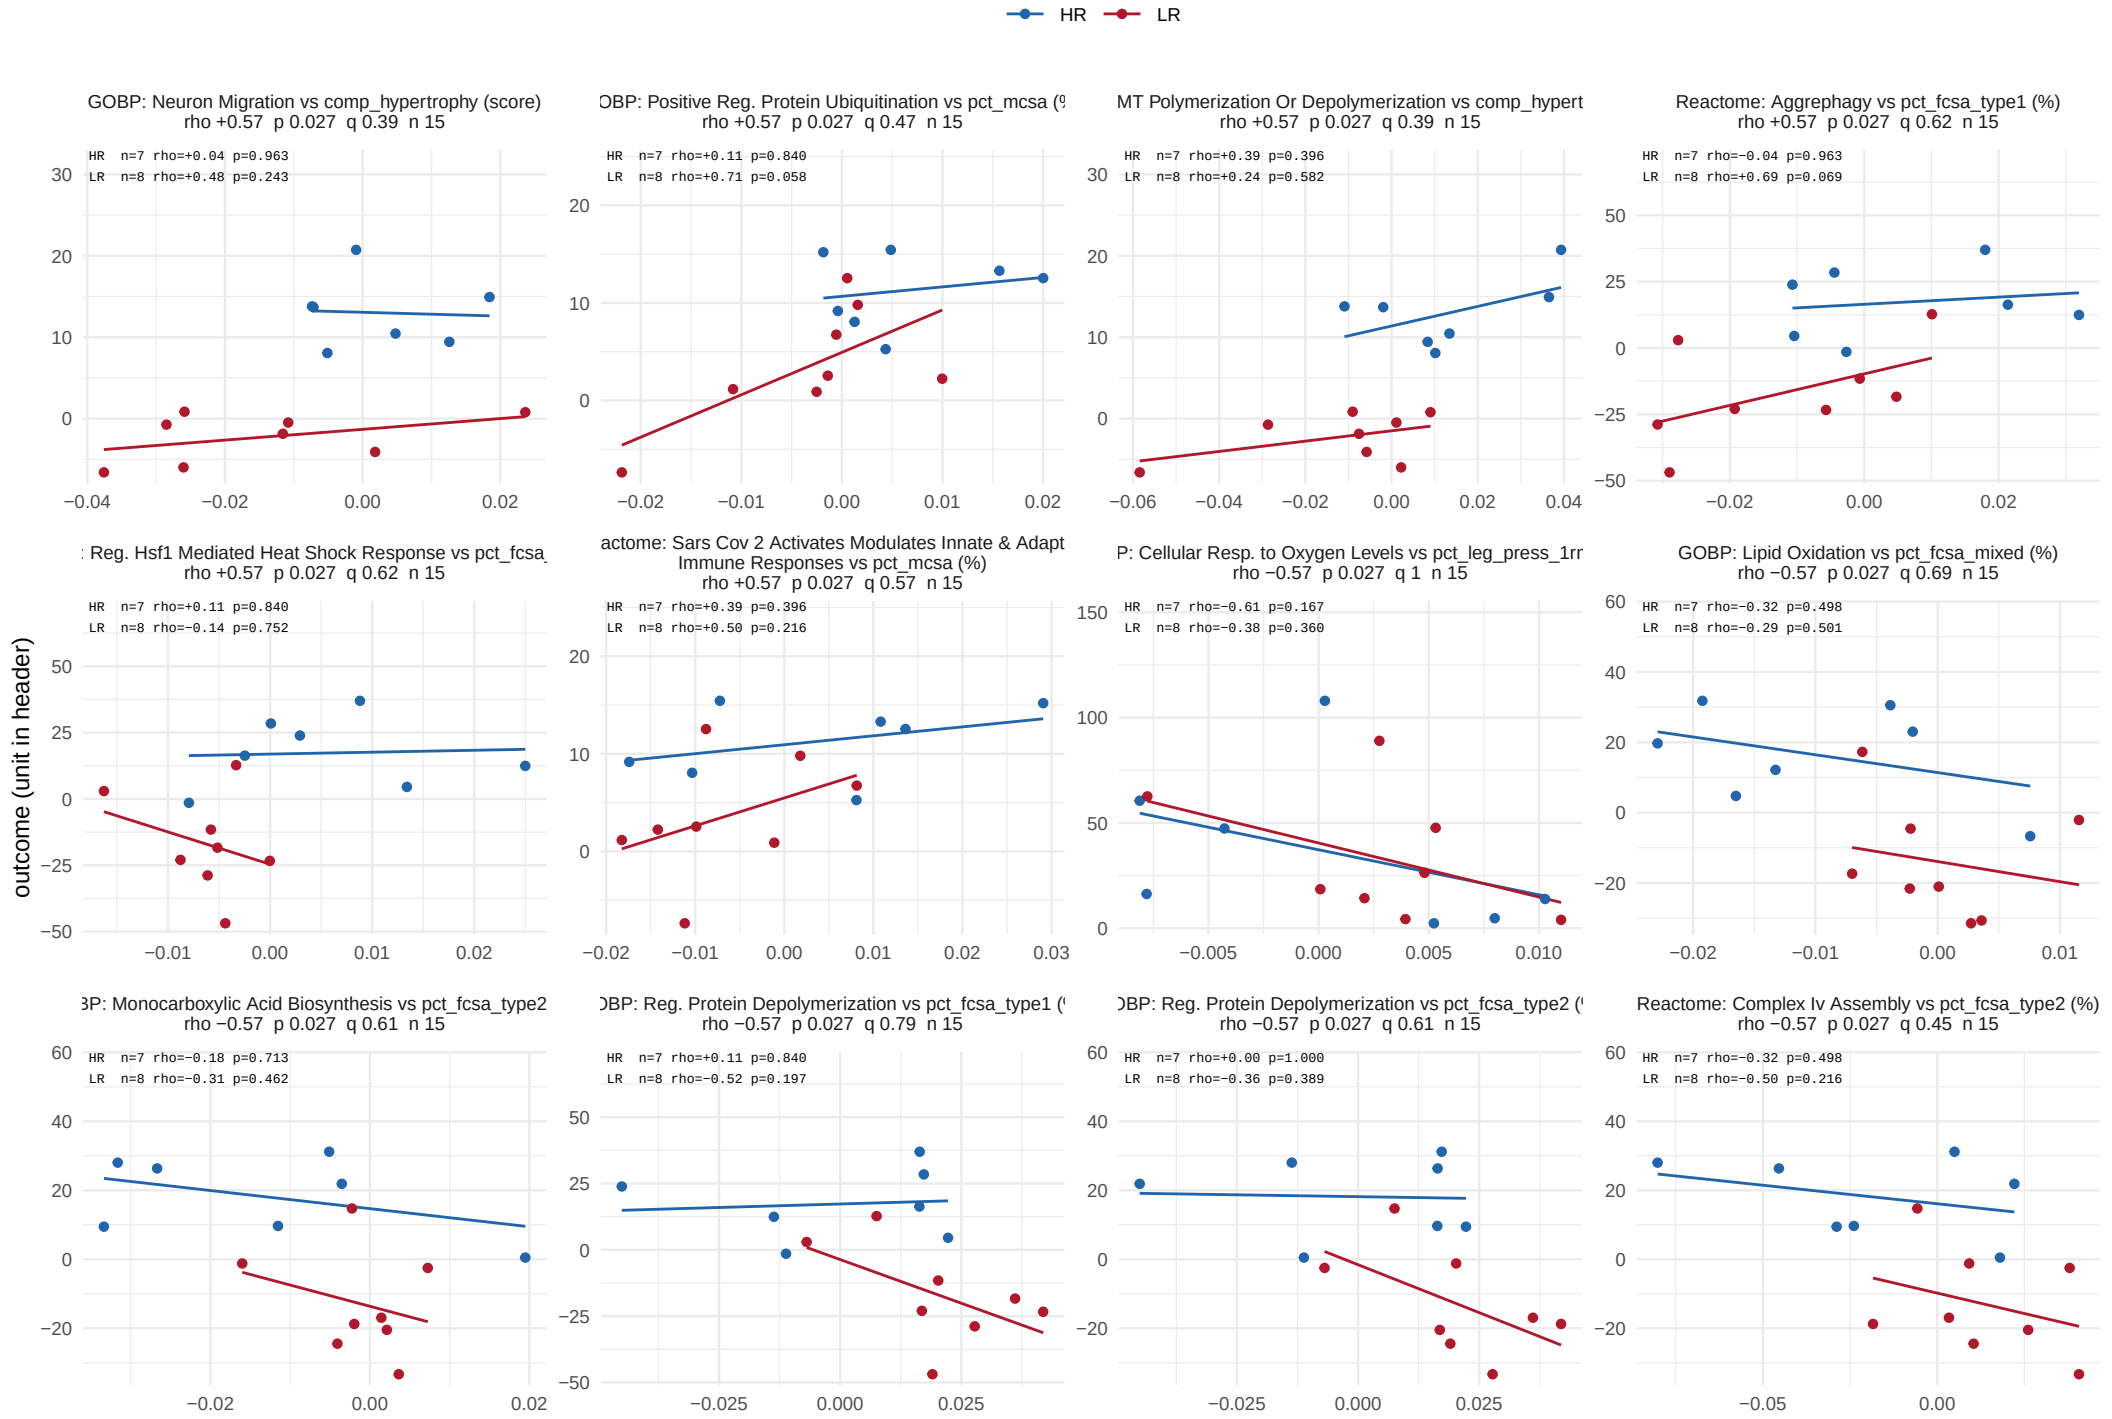


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, acute window


573 of 11024 feature−outcome pairs at p < 0.05, 4 at BH < 0.05. Page 30 of 48.

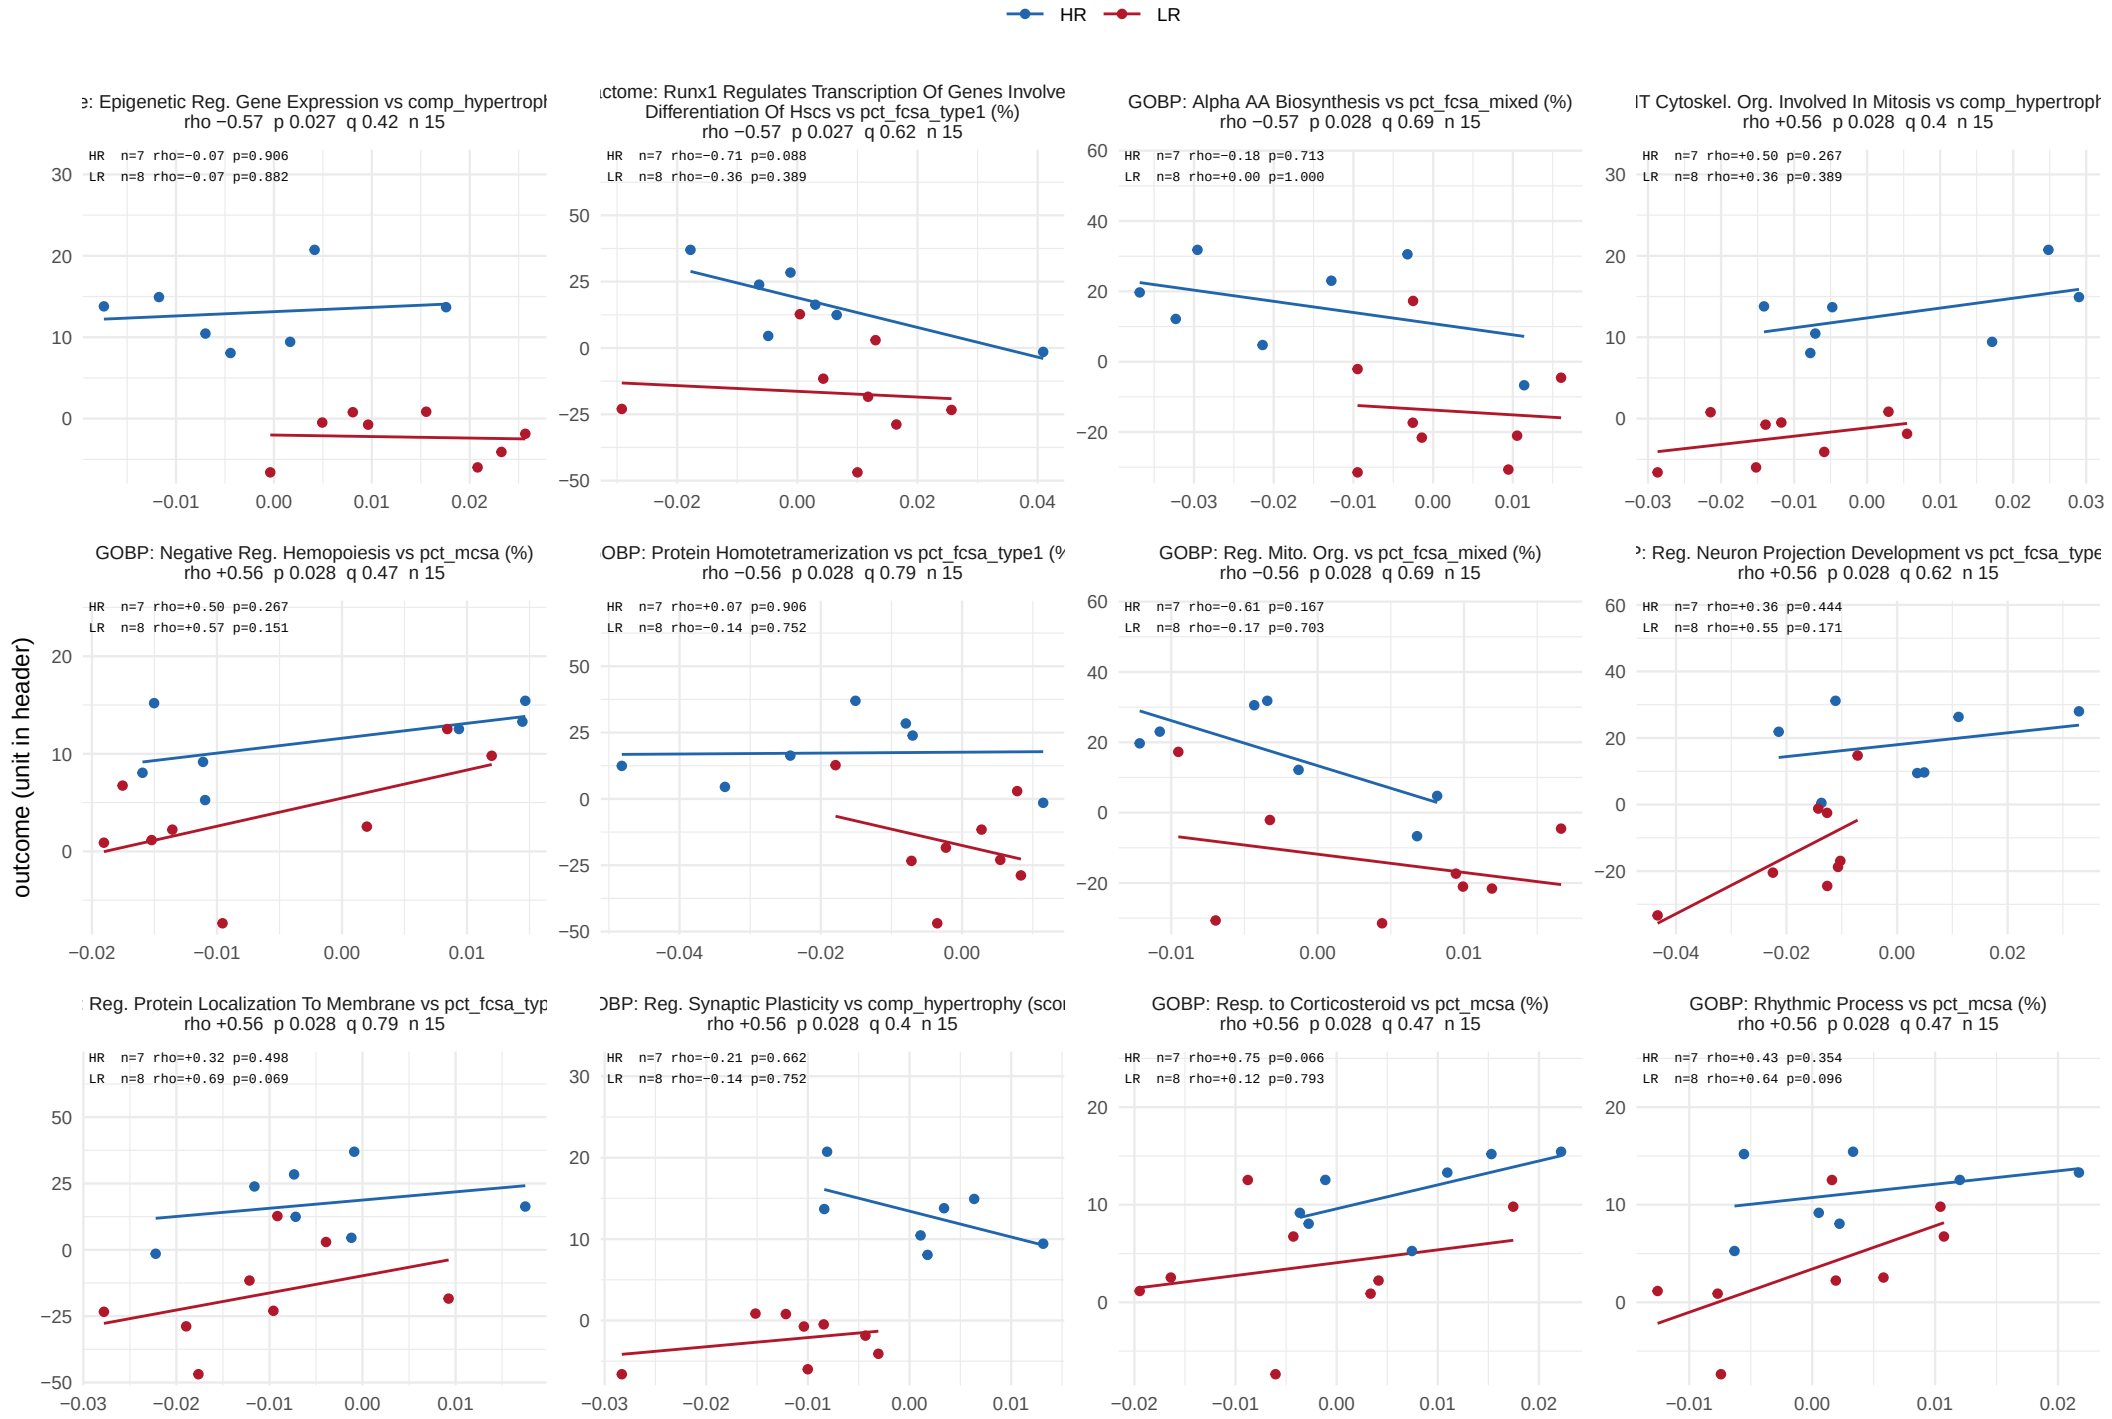


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, acute window


573 of 11024 feature−outcome pairs at p < 0.05, 4 at BH < 0.05. Page 31 of 48.

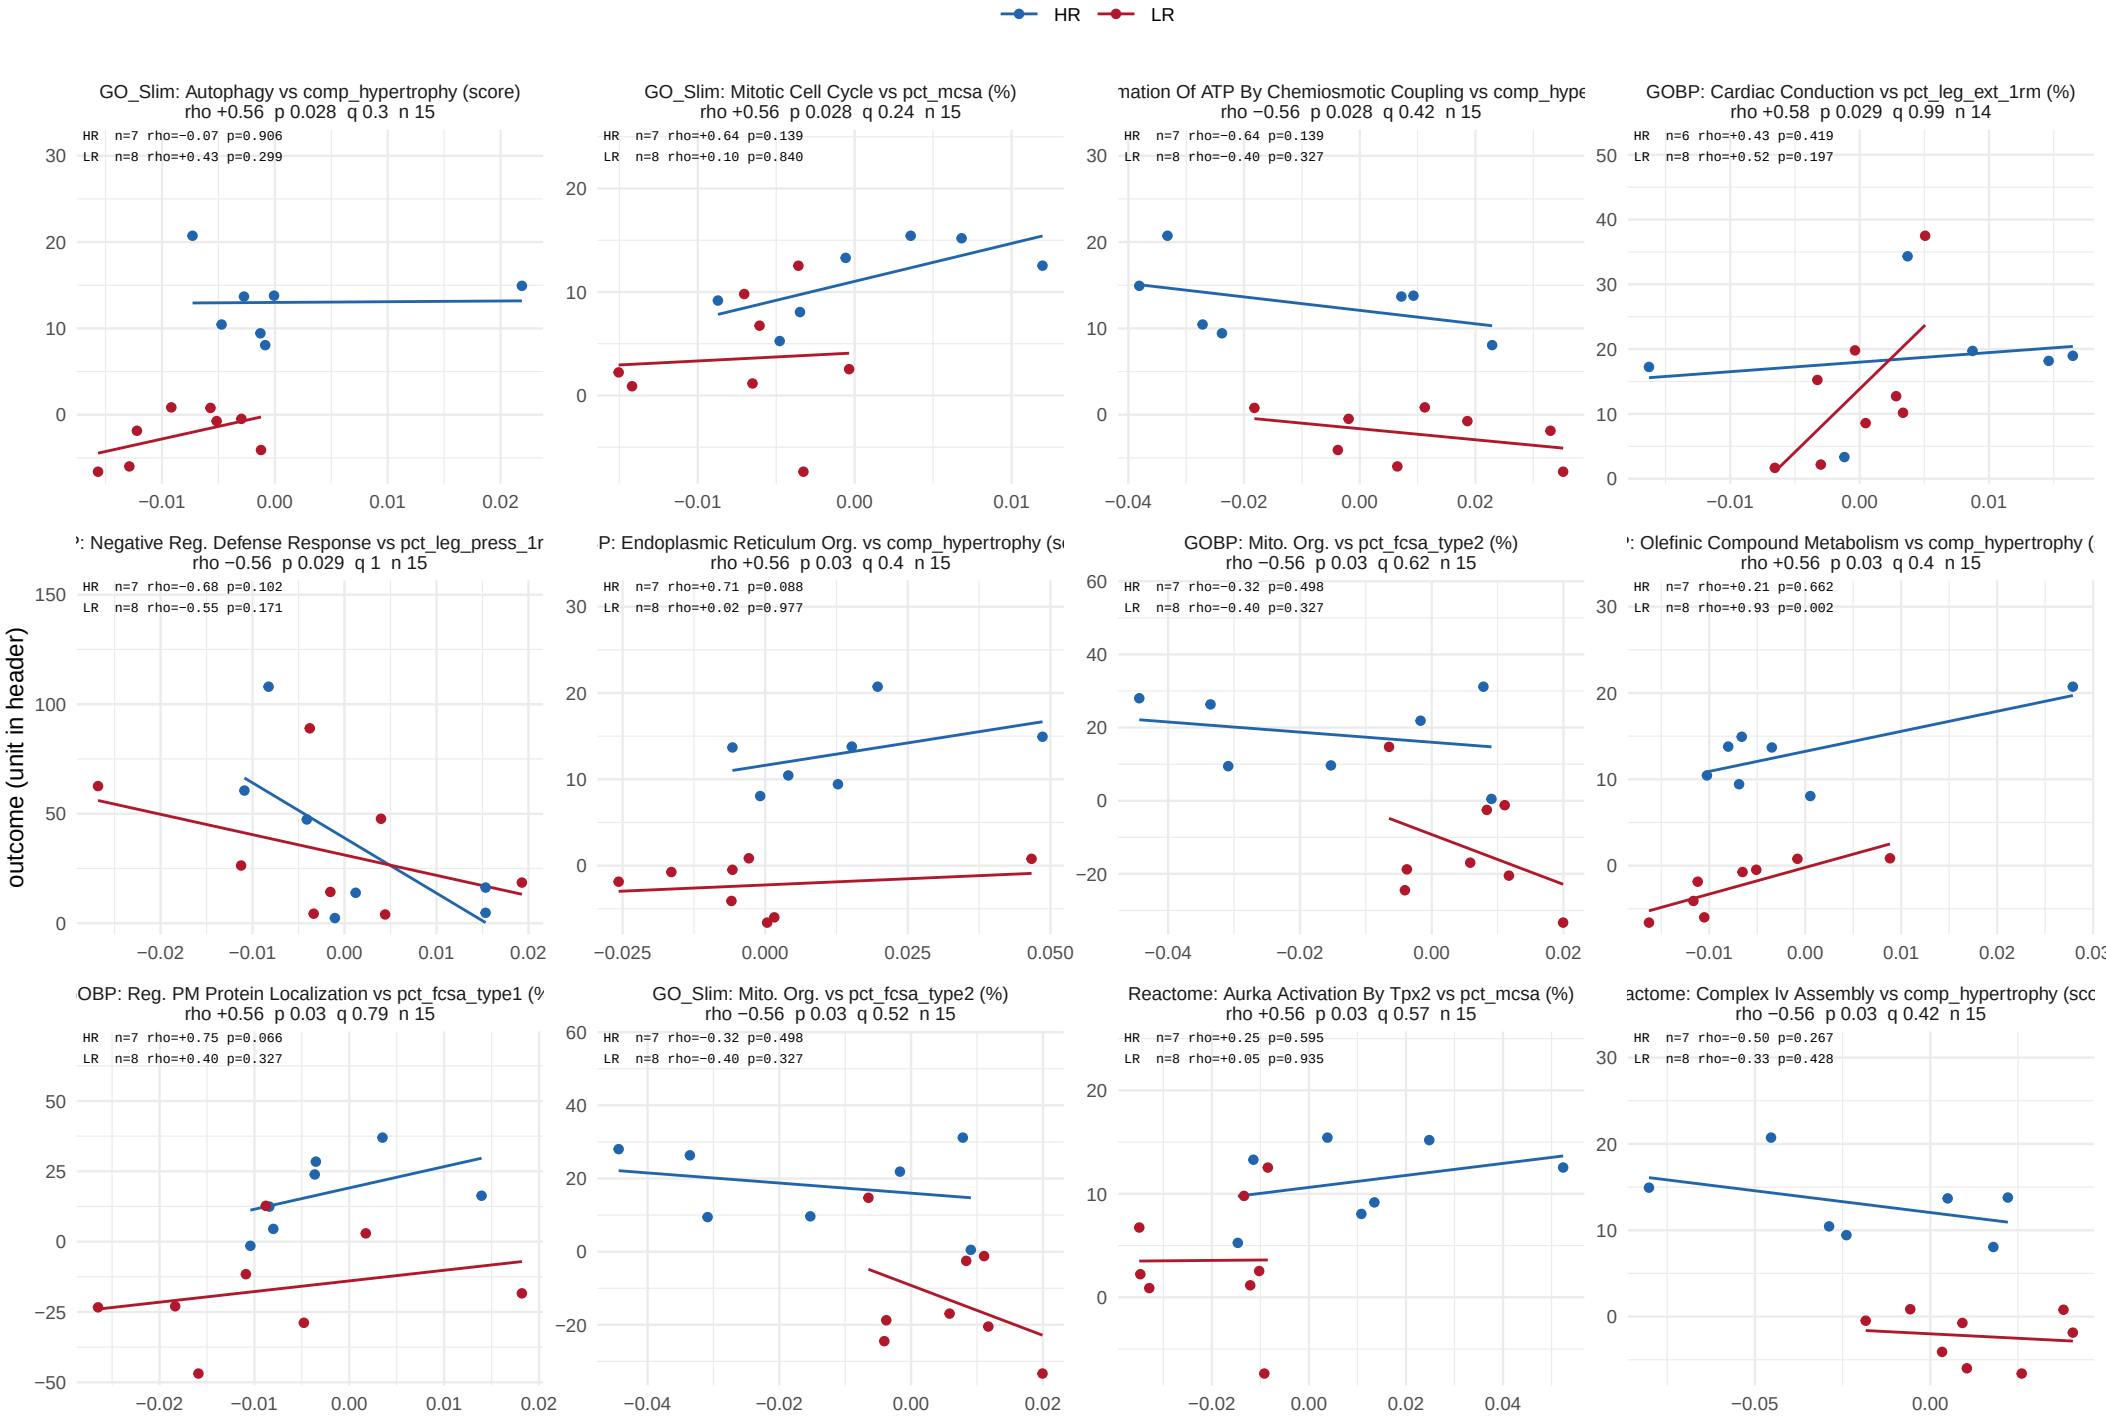


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

# Change score, acute window


573 of 11024 feature−outcome pairs at p < 0.05, 4 at BH < 0.05. Page 32 of 48.

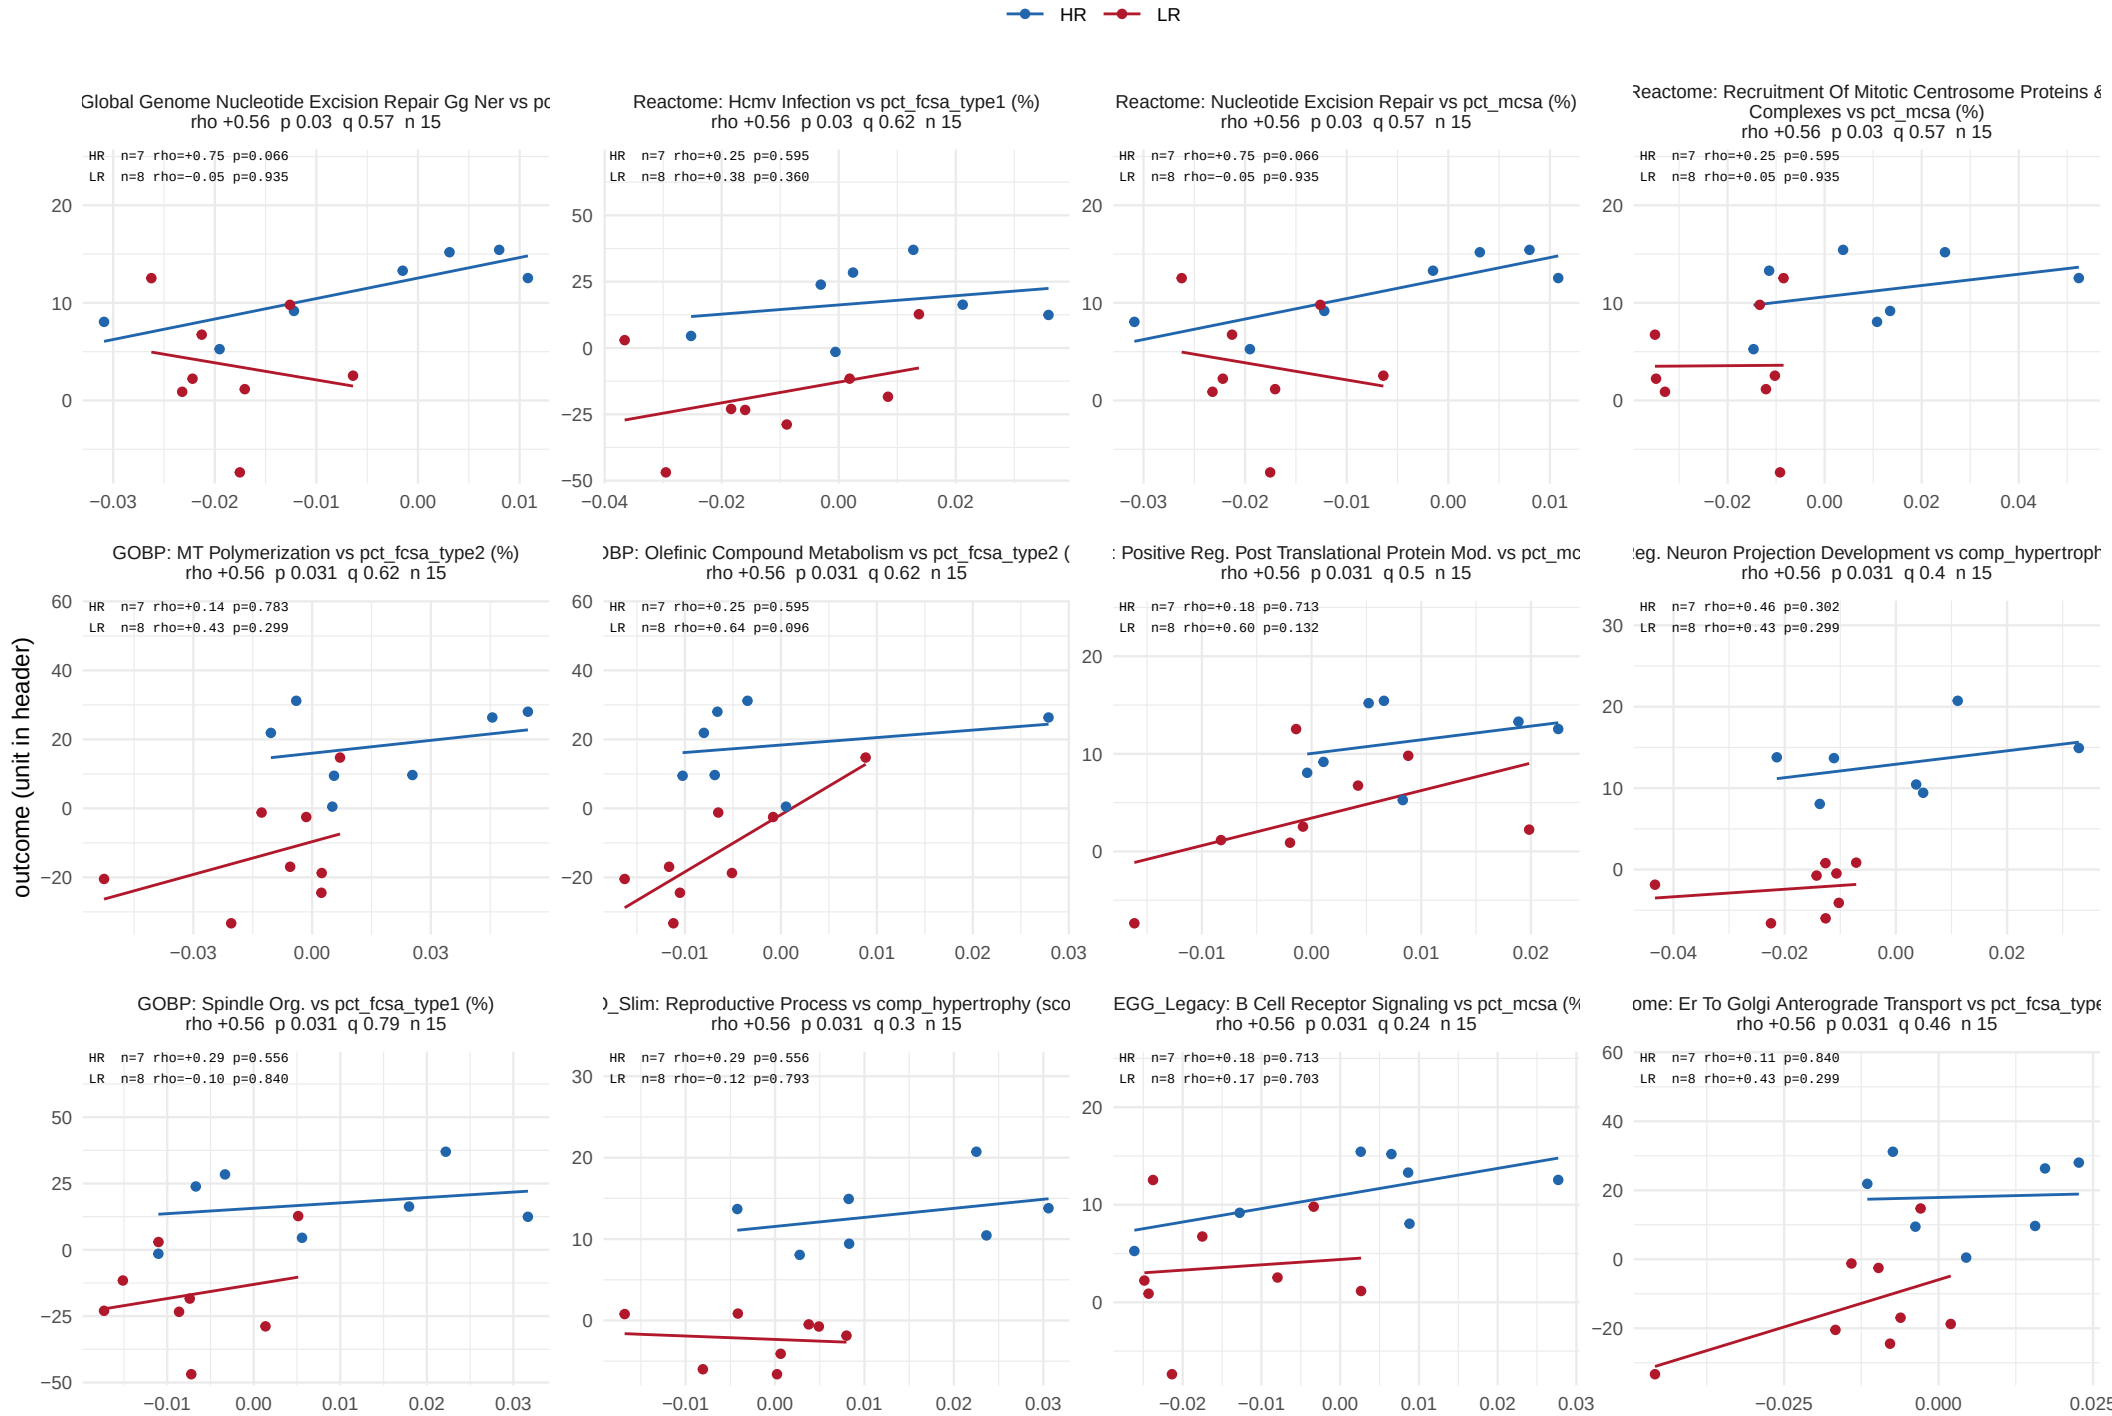


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, acute window


573 of 11024 feature−outcome pairs at p < 0.05, 4 at BH < 0.05. Page 33 of 48.

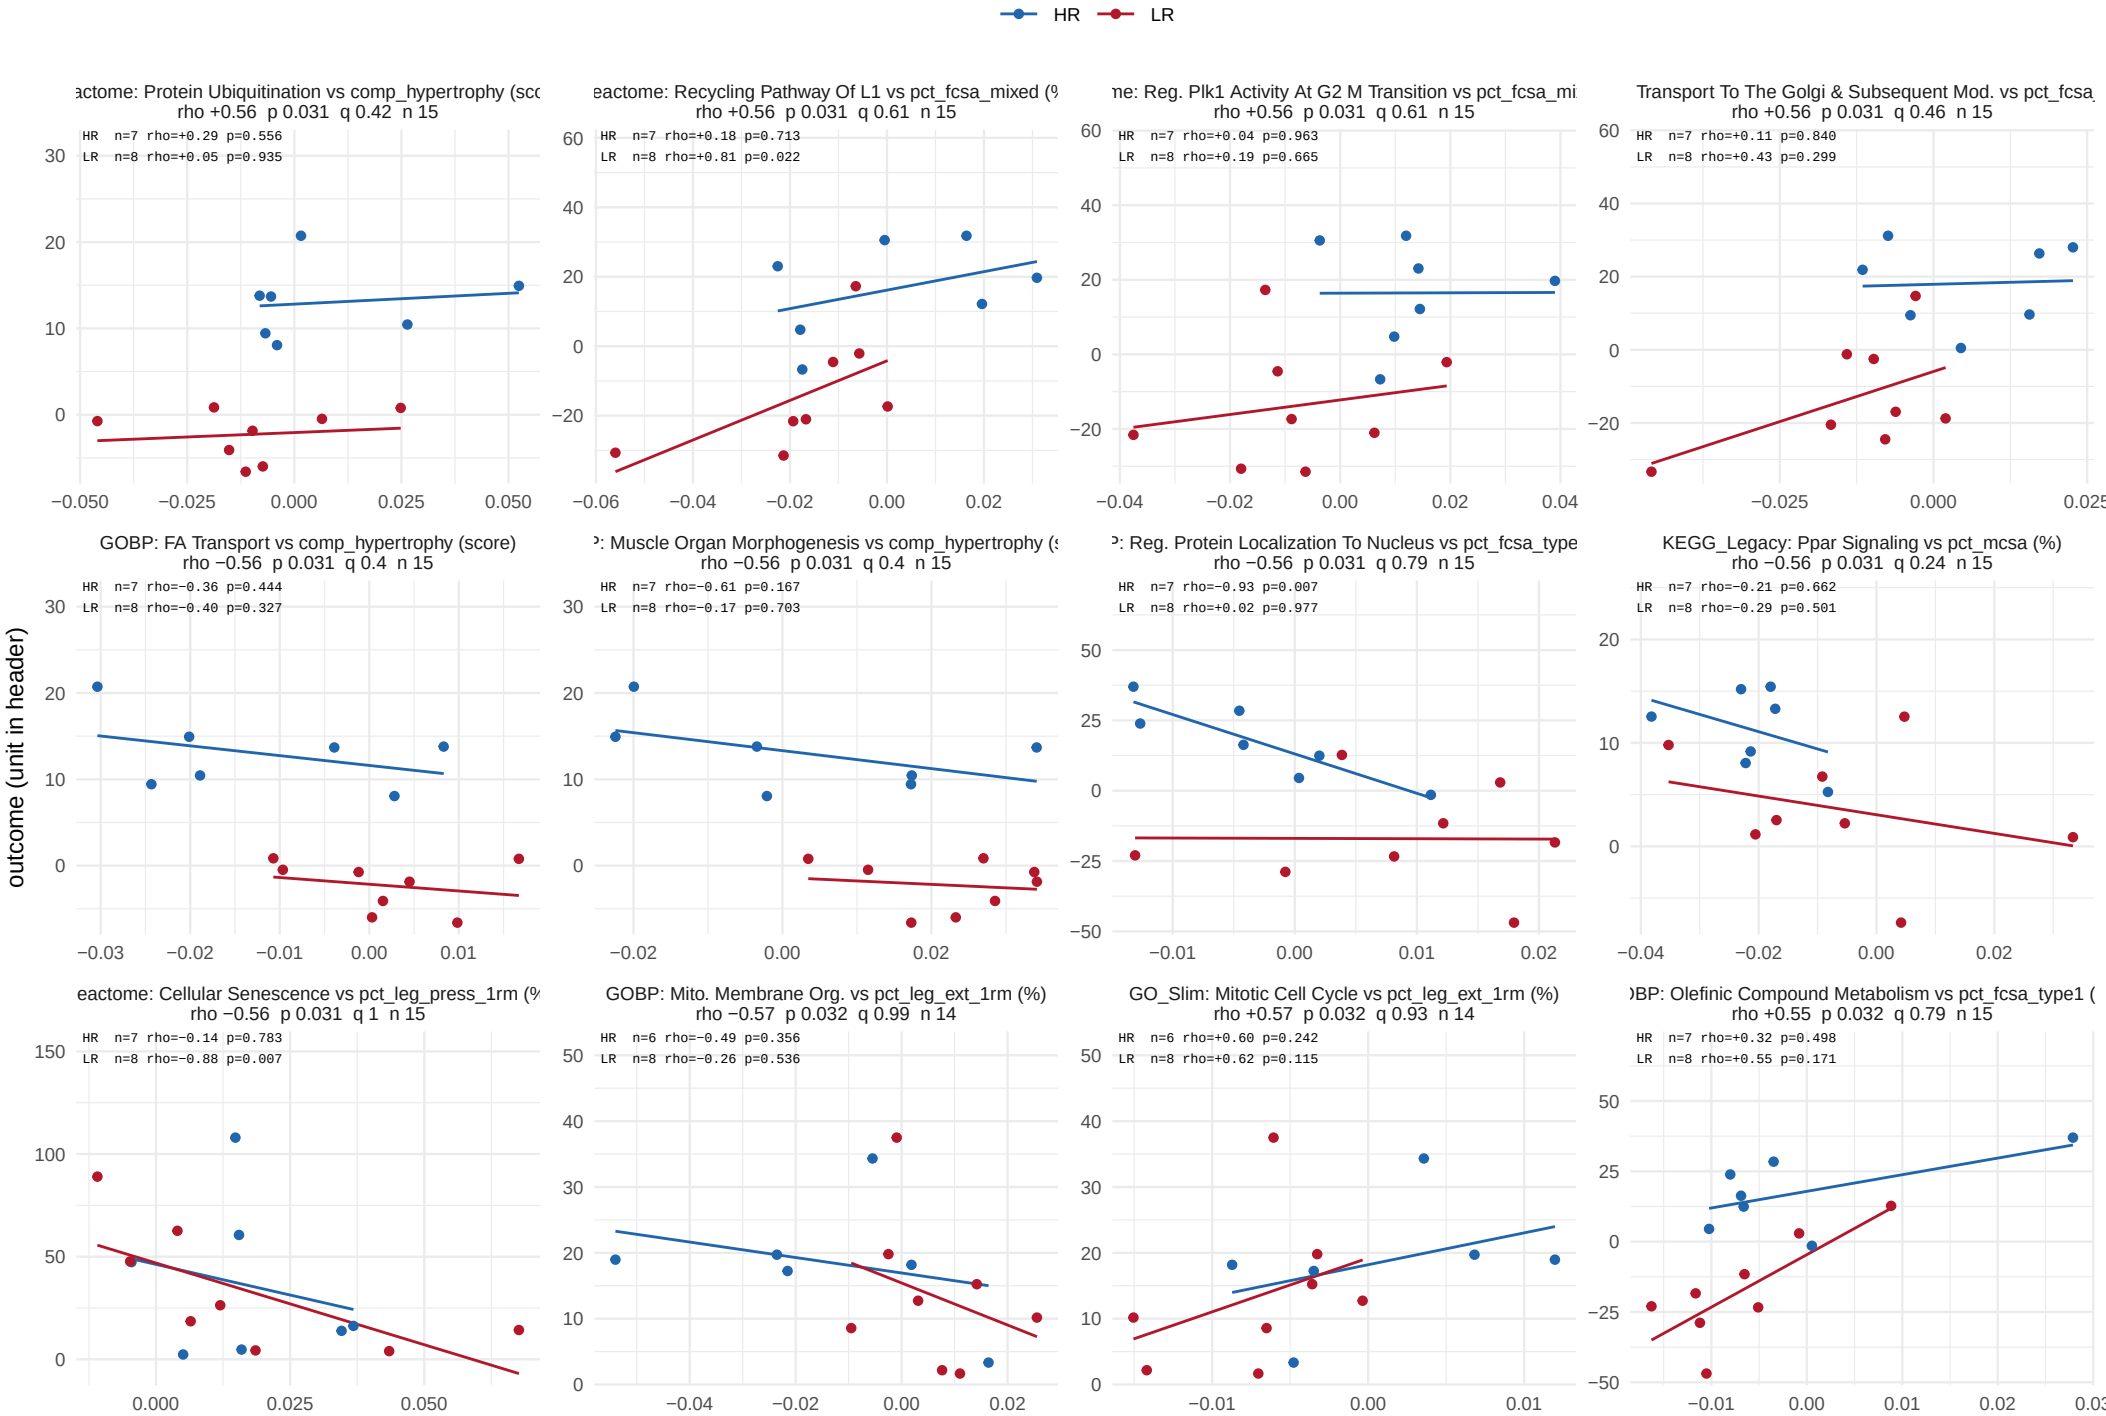


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, acute window


573 of 11024 feature−outcome pairs at p < 0.05, 4 at BH < 0.05. Page 34 of 48.

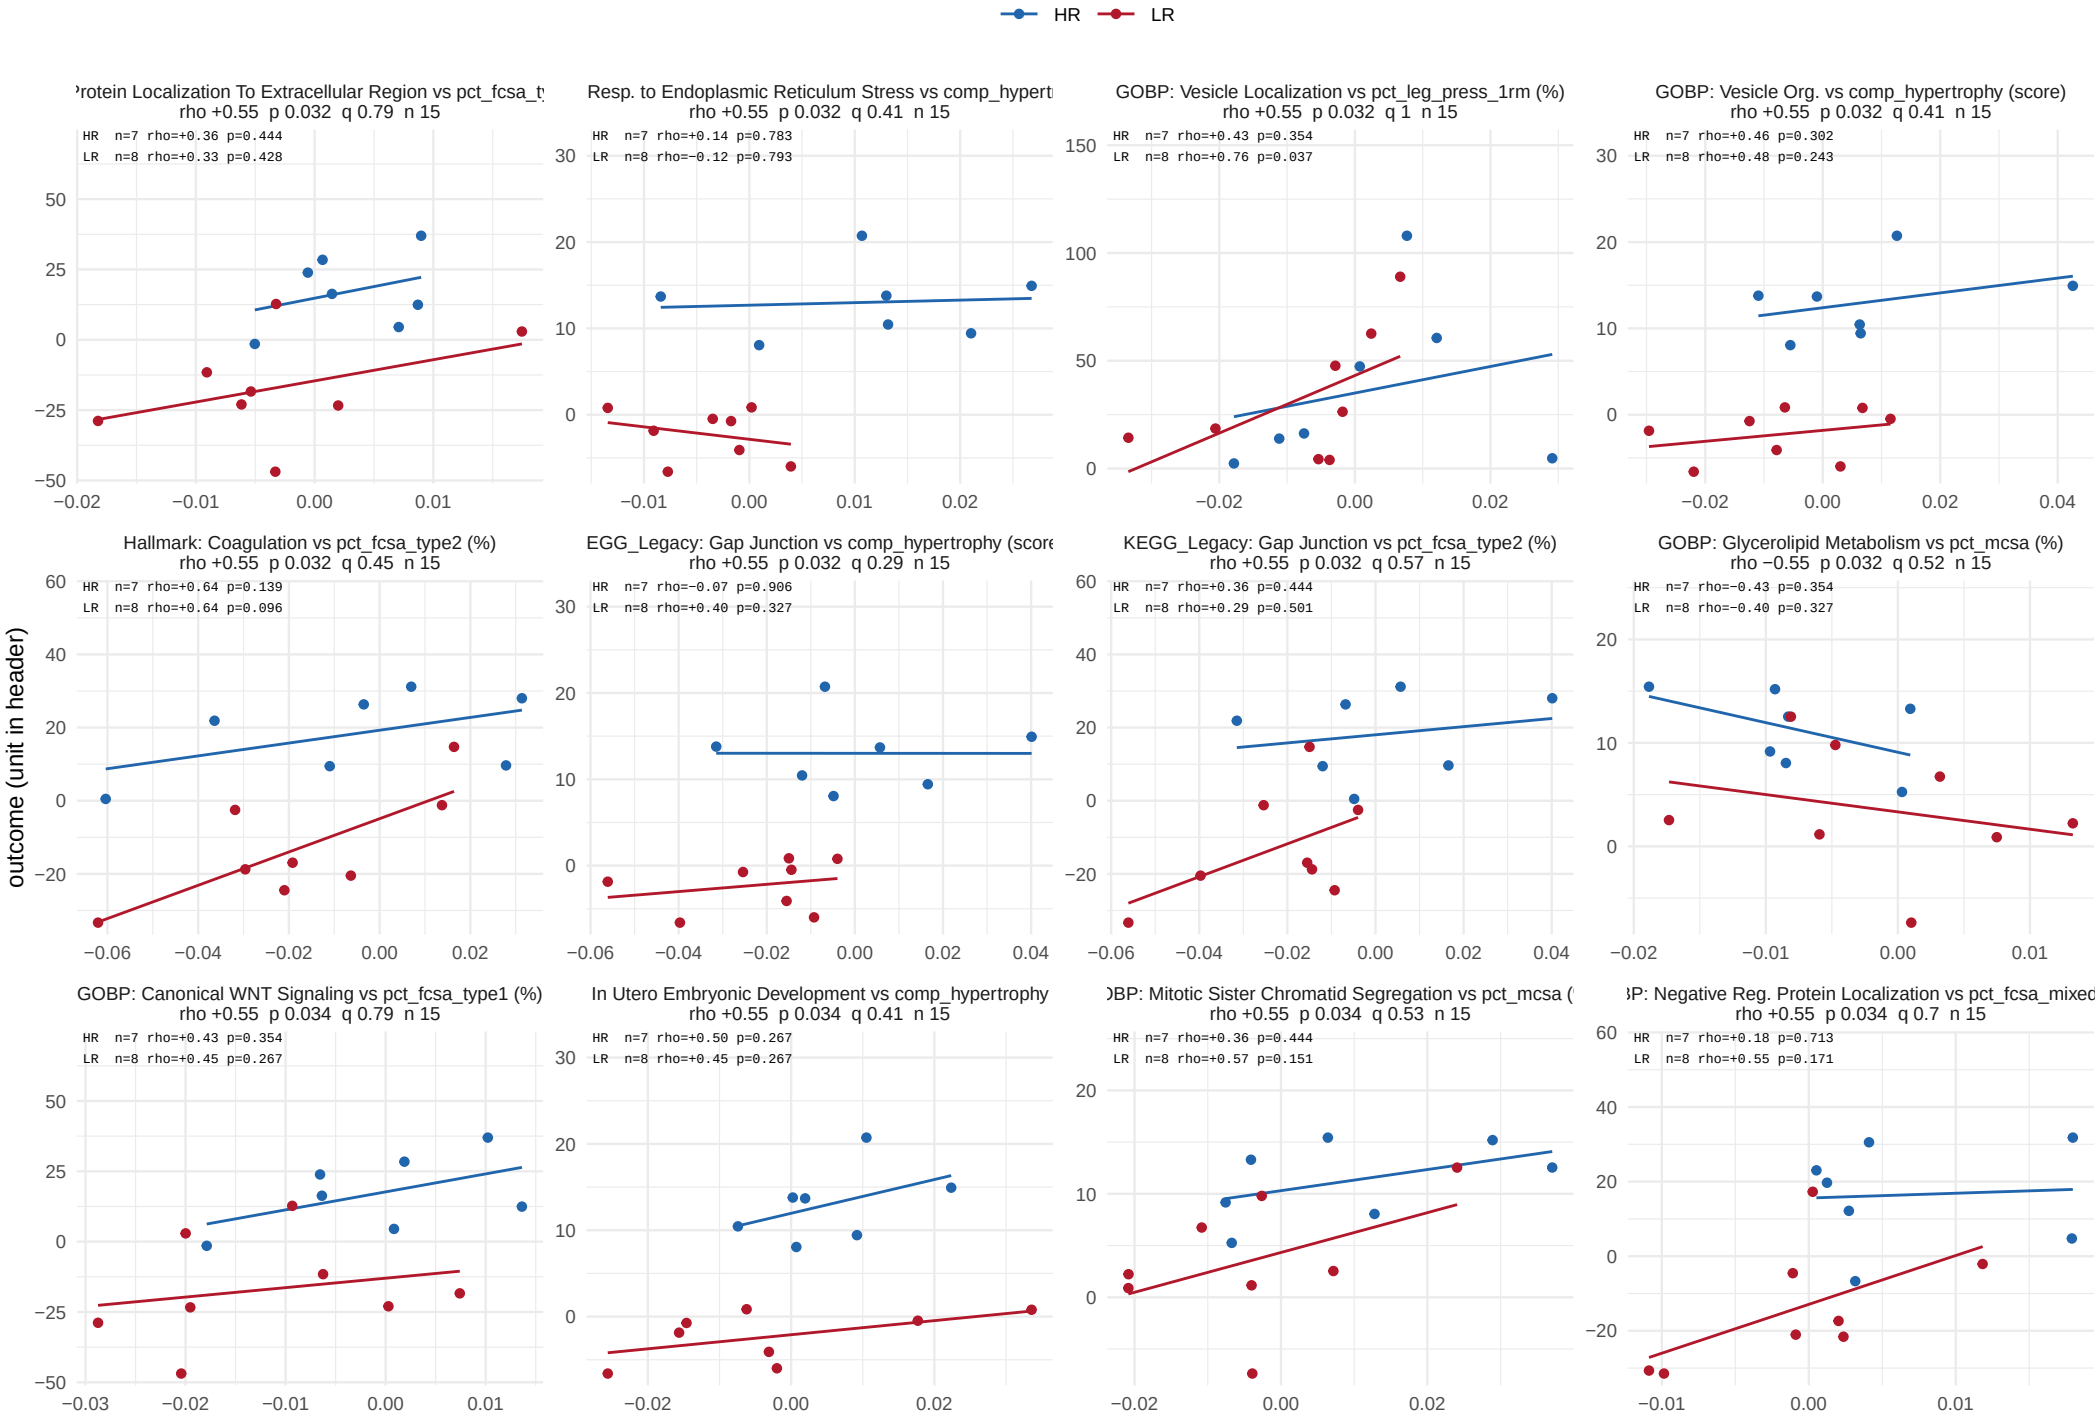


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, acute window


573 of 11024 feature−outcome pairs at p < 0.05, 4 at BH < 0.05. Page 35 of 48.

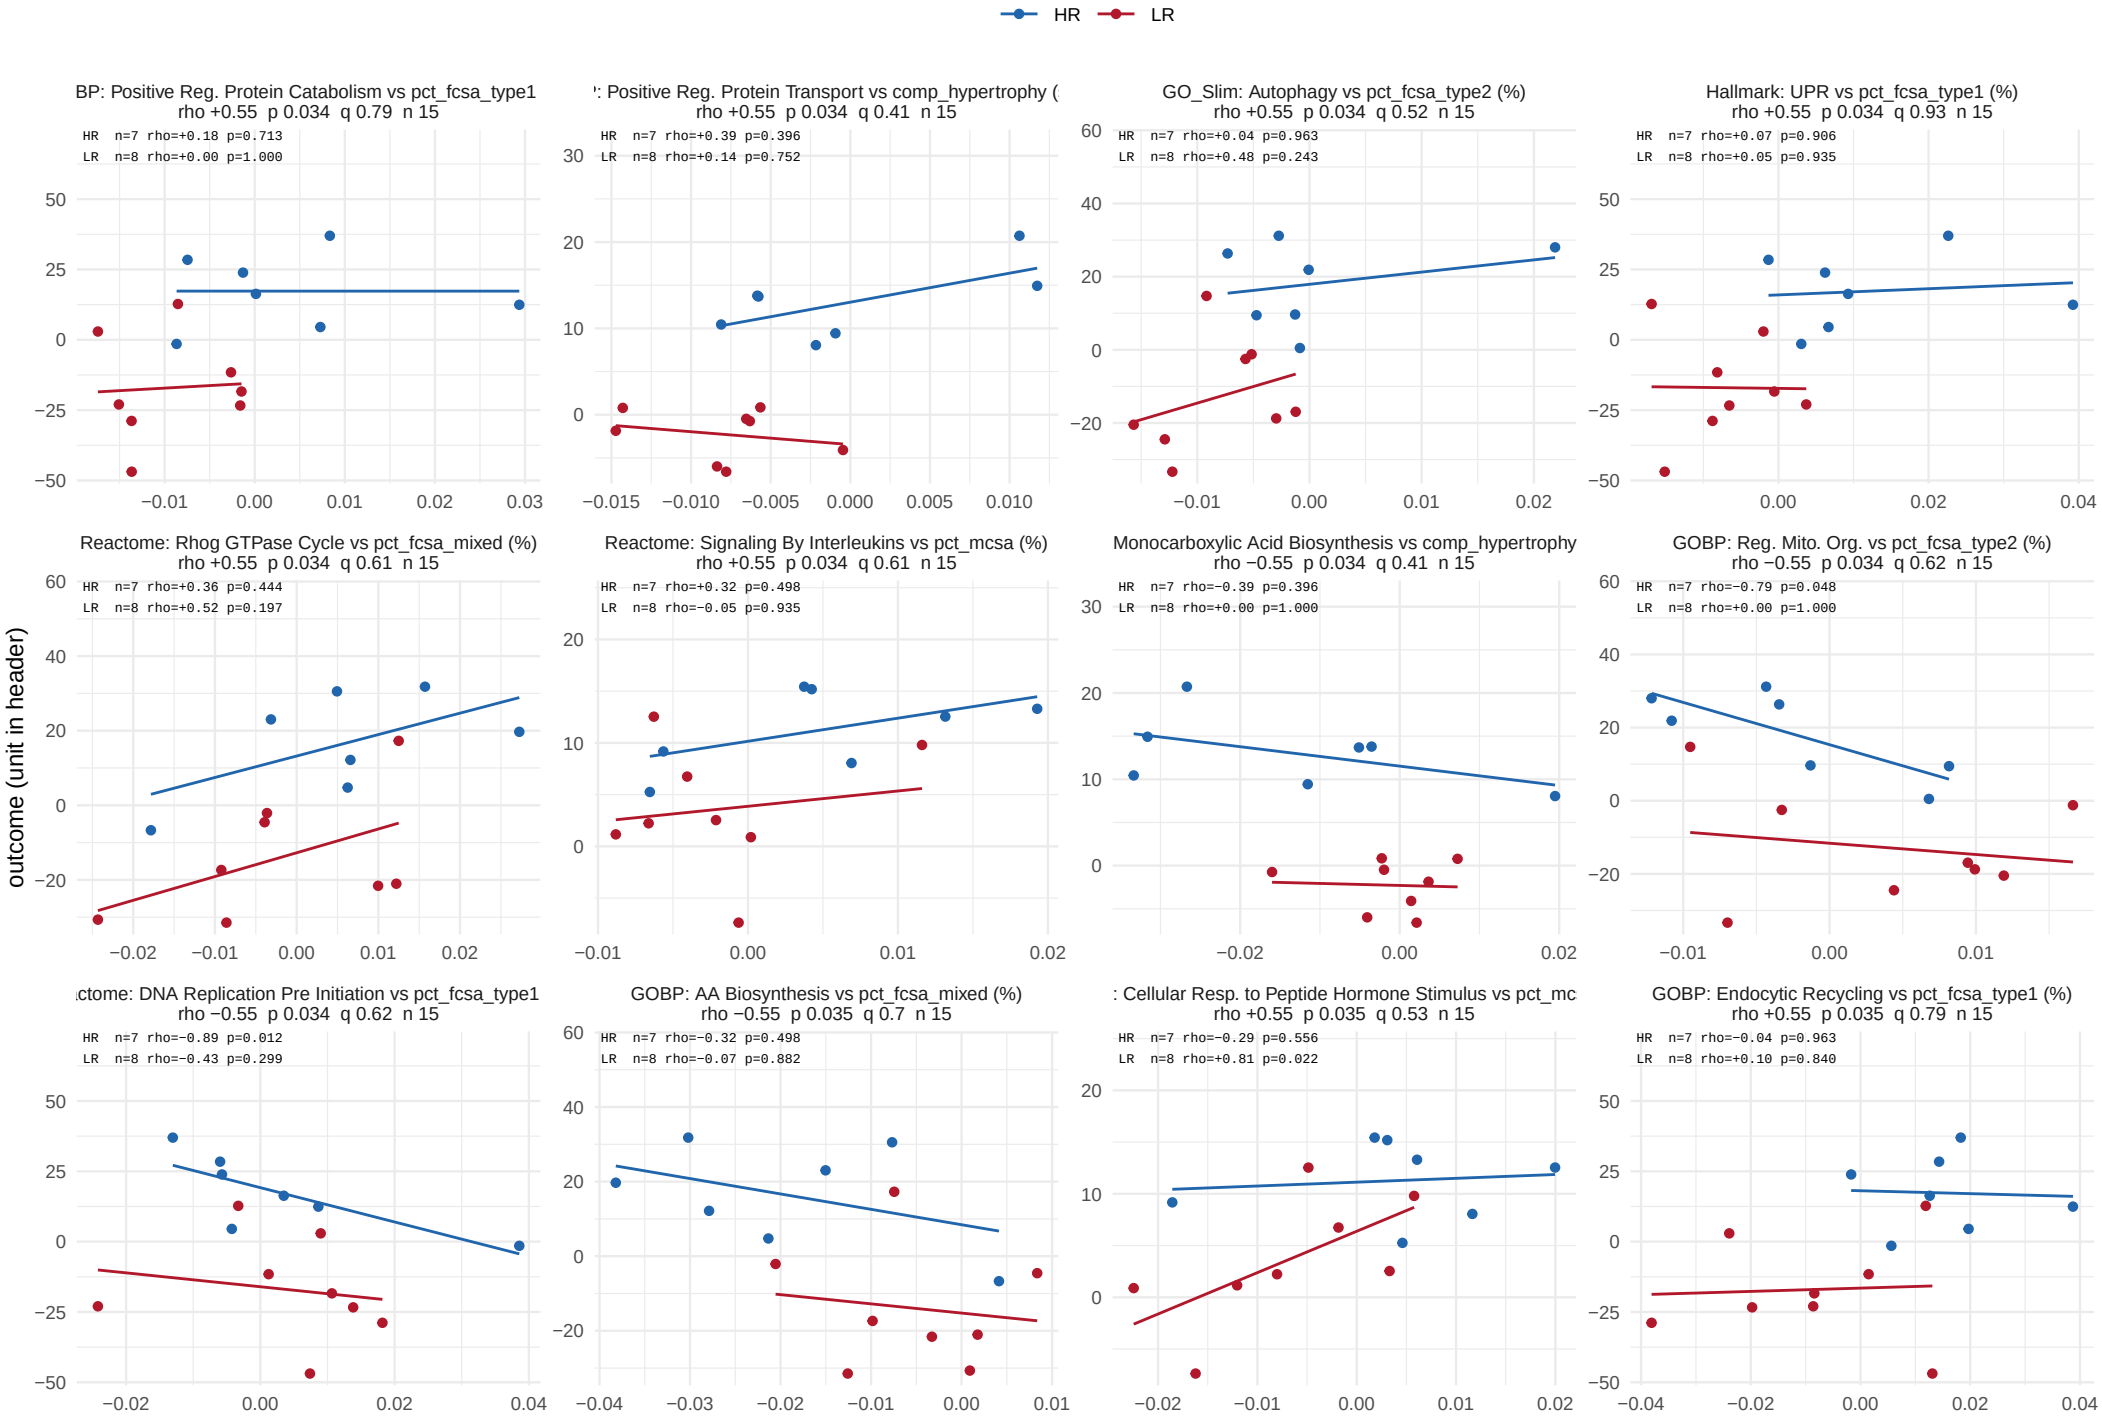


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, acute window


573 of 11024 feature−outcome pairs at p < 0.05, 4 at BH < 0.05. Page 36 of 48.

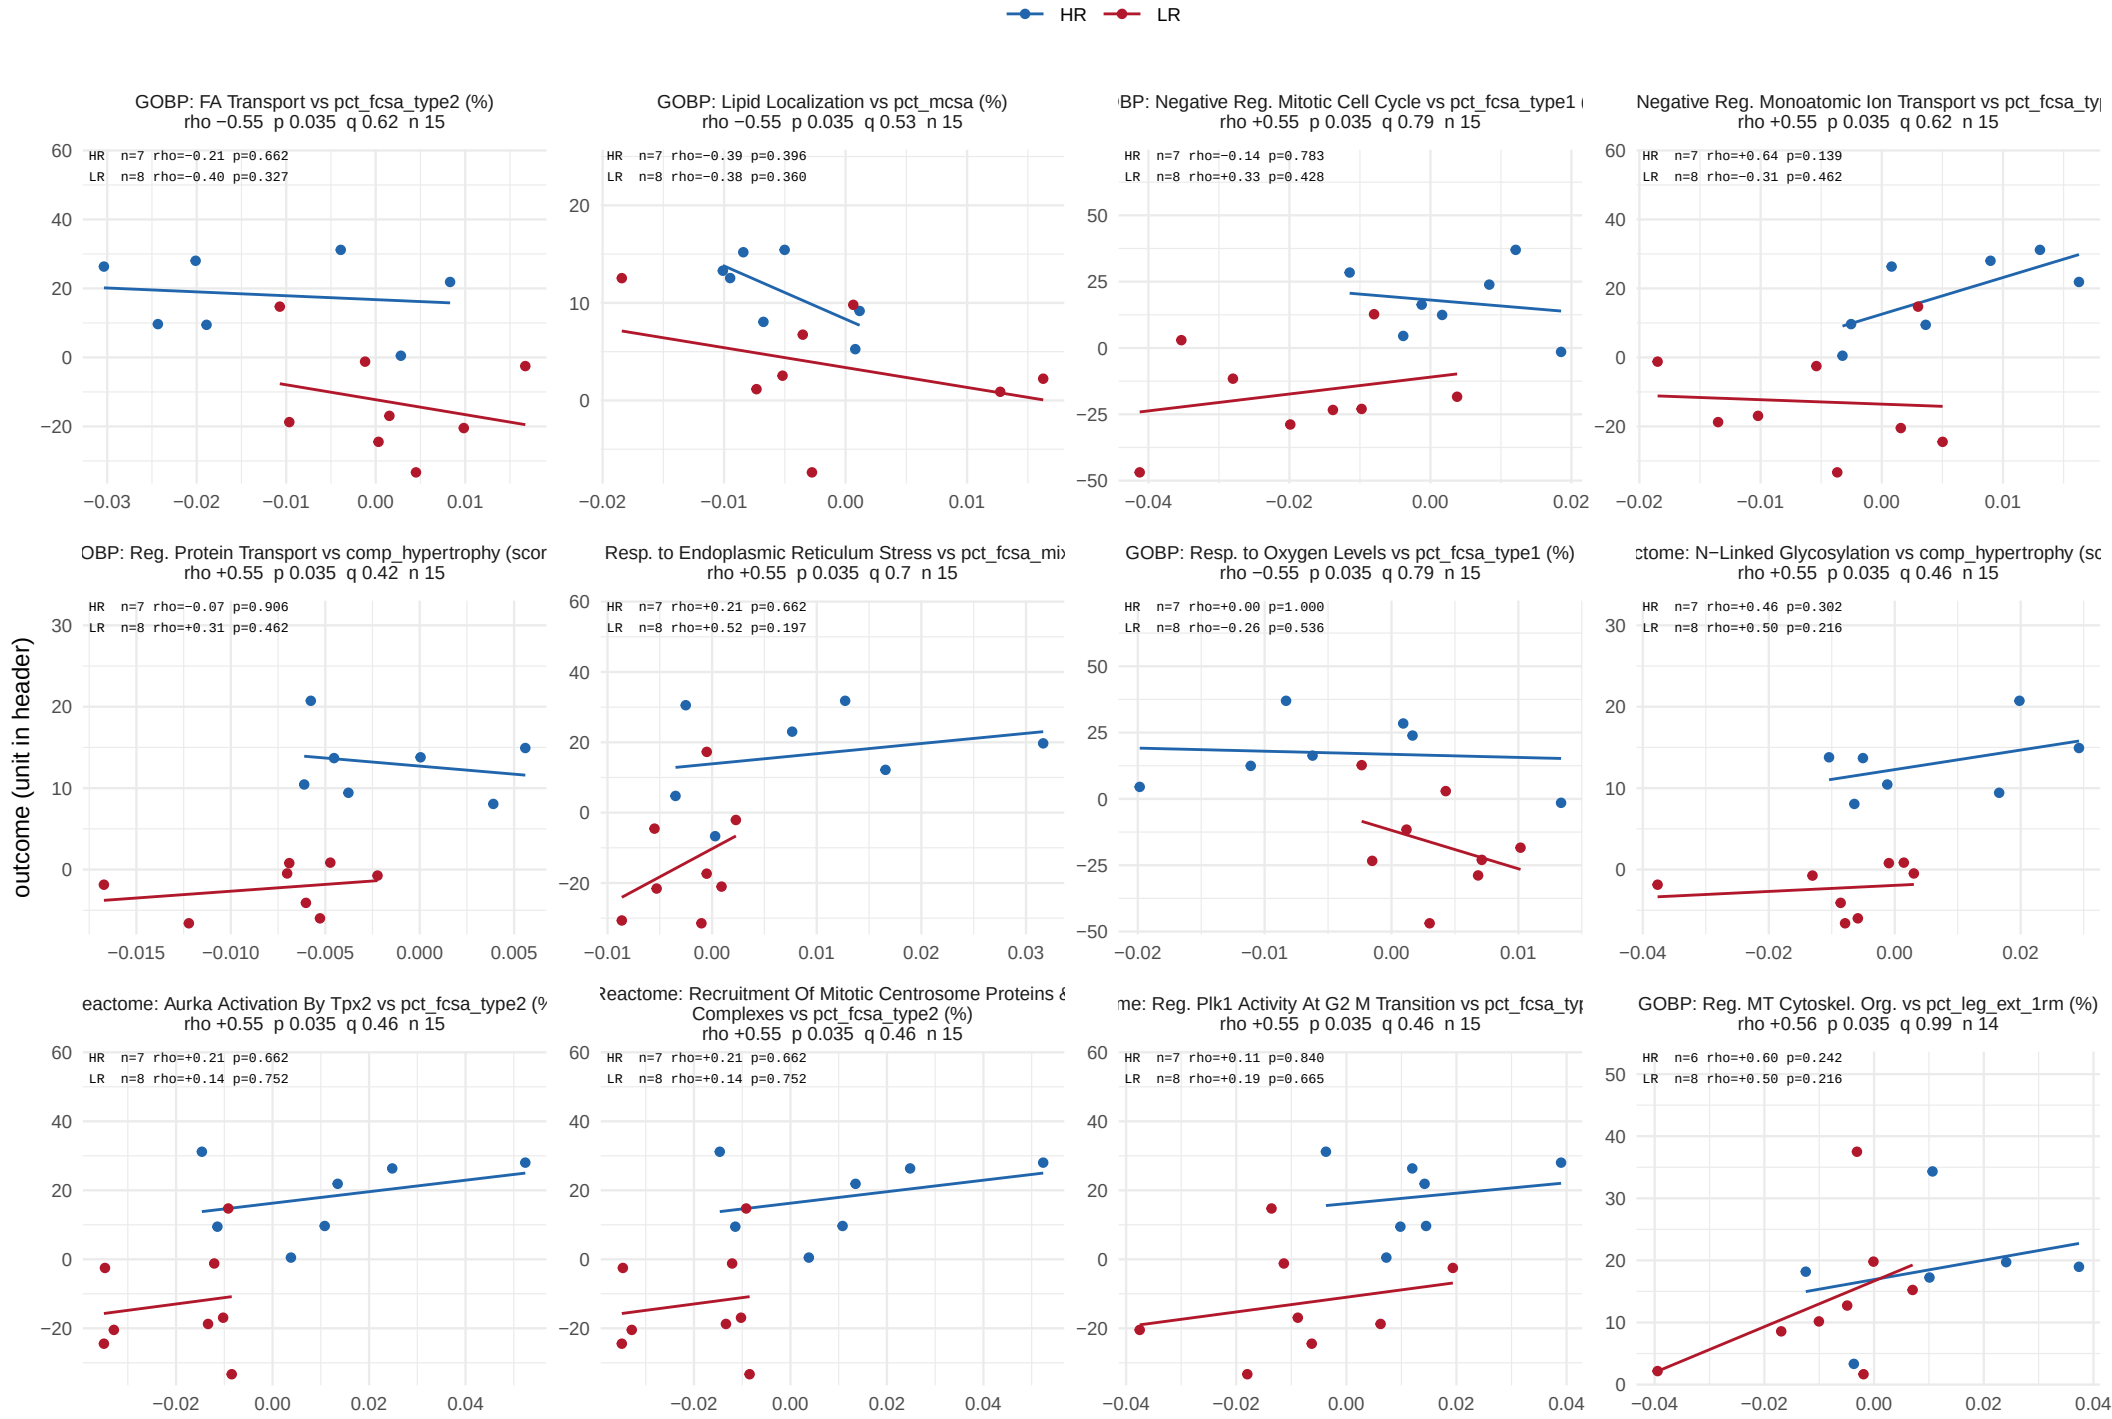


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, acute window


573 of 11024 feature−outcome pairs at p < 0.05, 4 at BH < 0.05. Page 37 of 48.

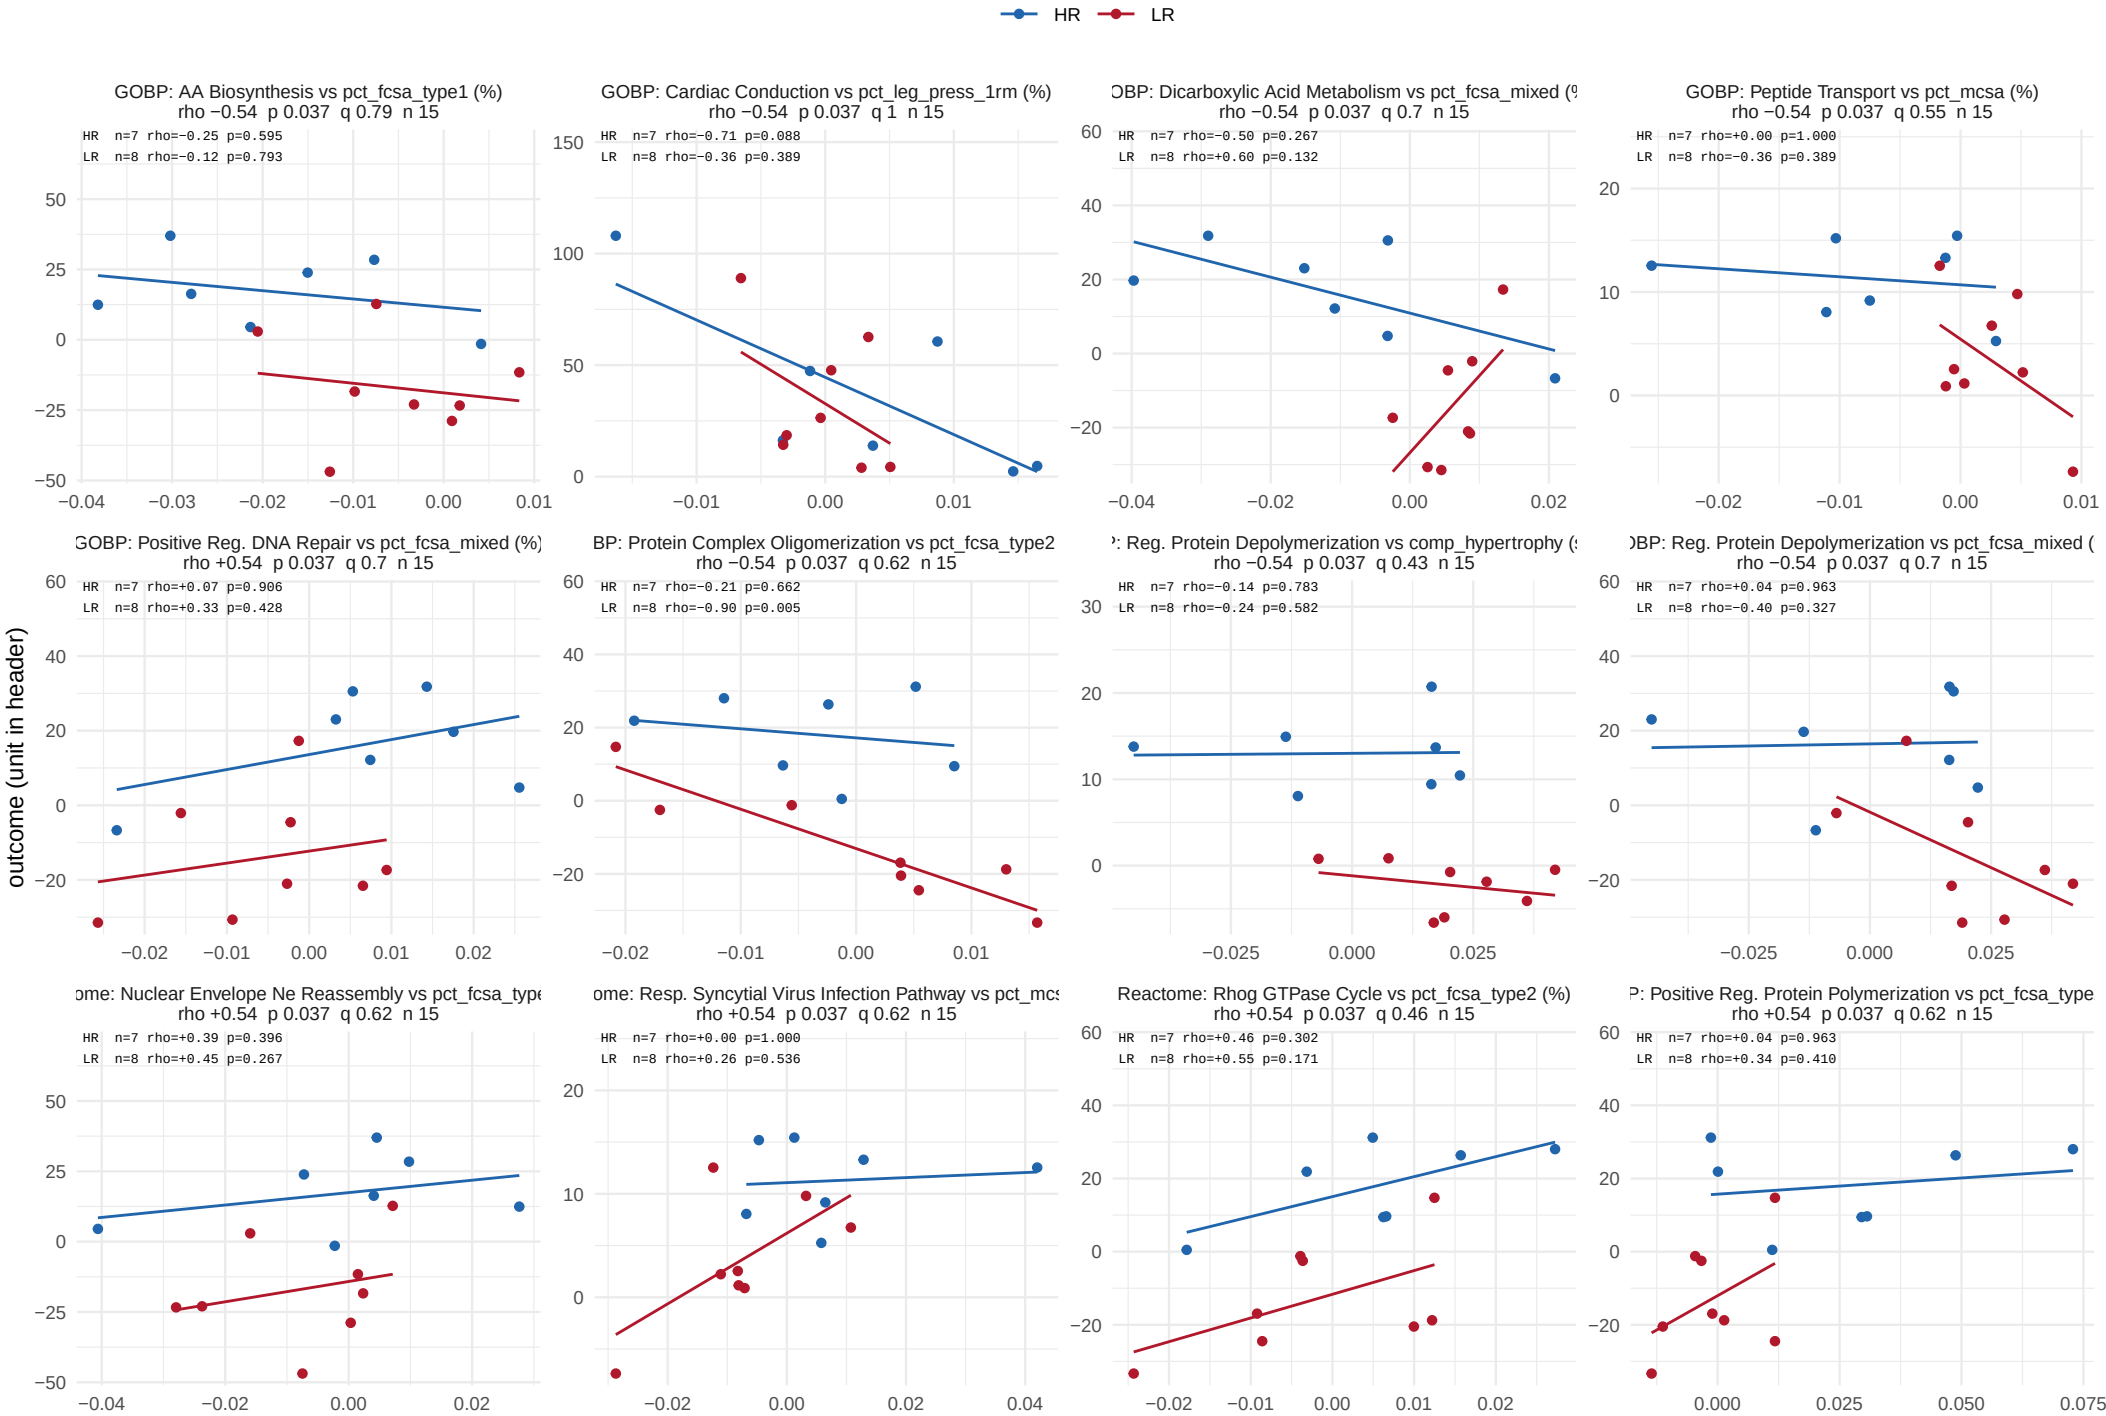


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, acute window


573 of 11024 feature−outcome pairs at p < 0.05, 4 at BH < 0.05. Page 38 of 48.

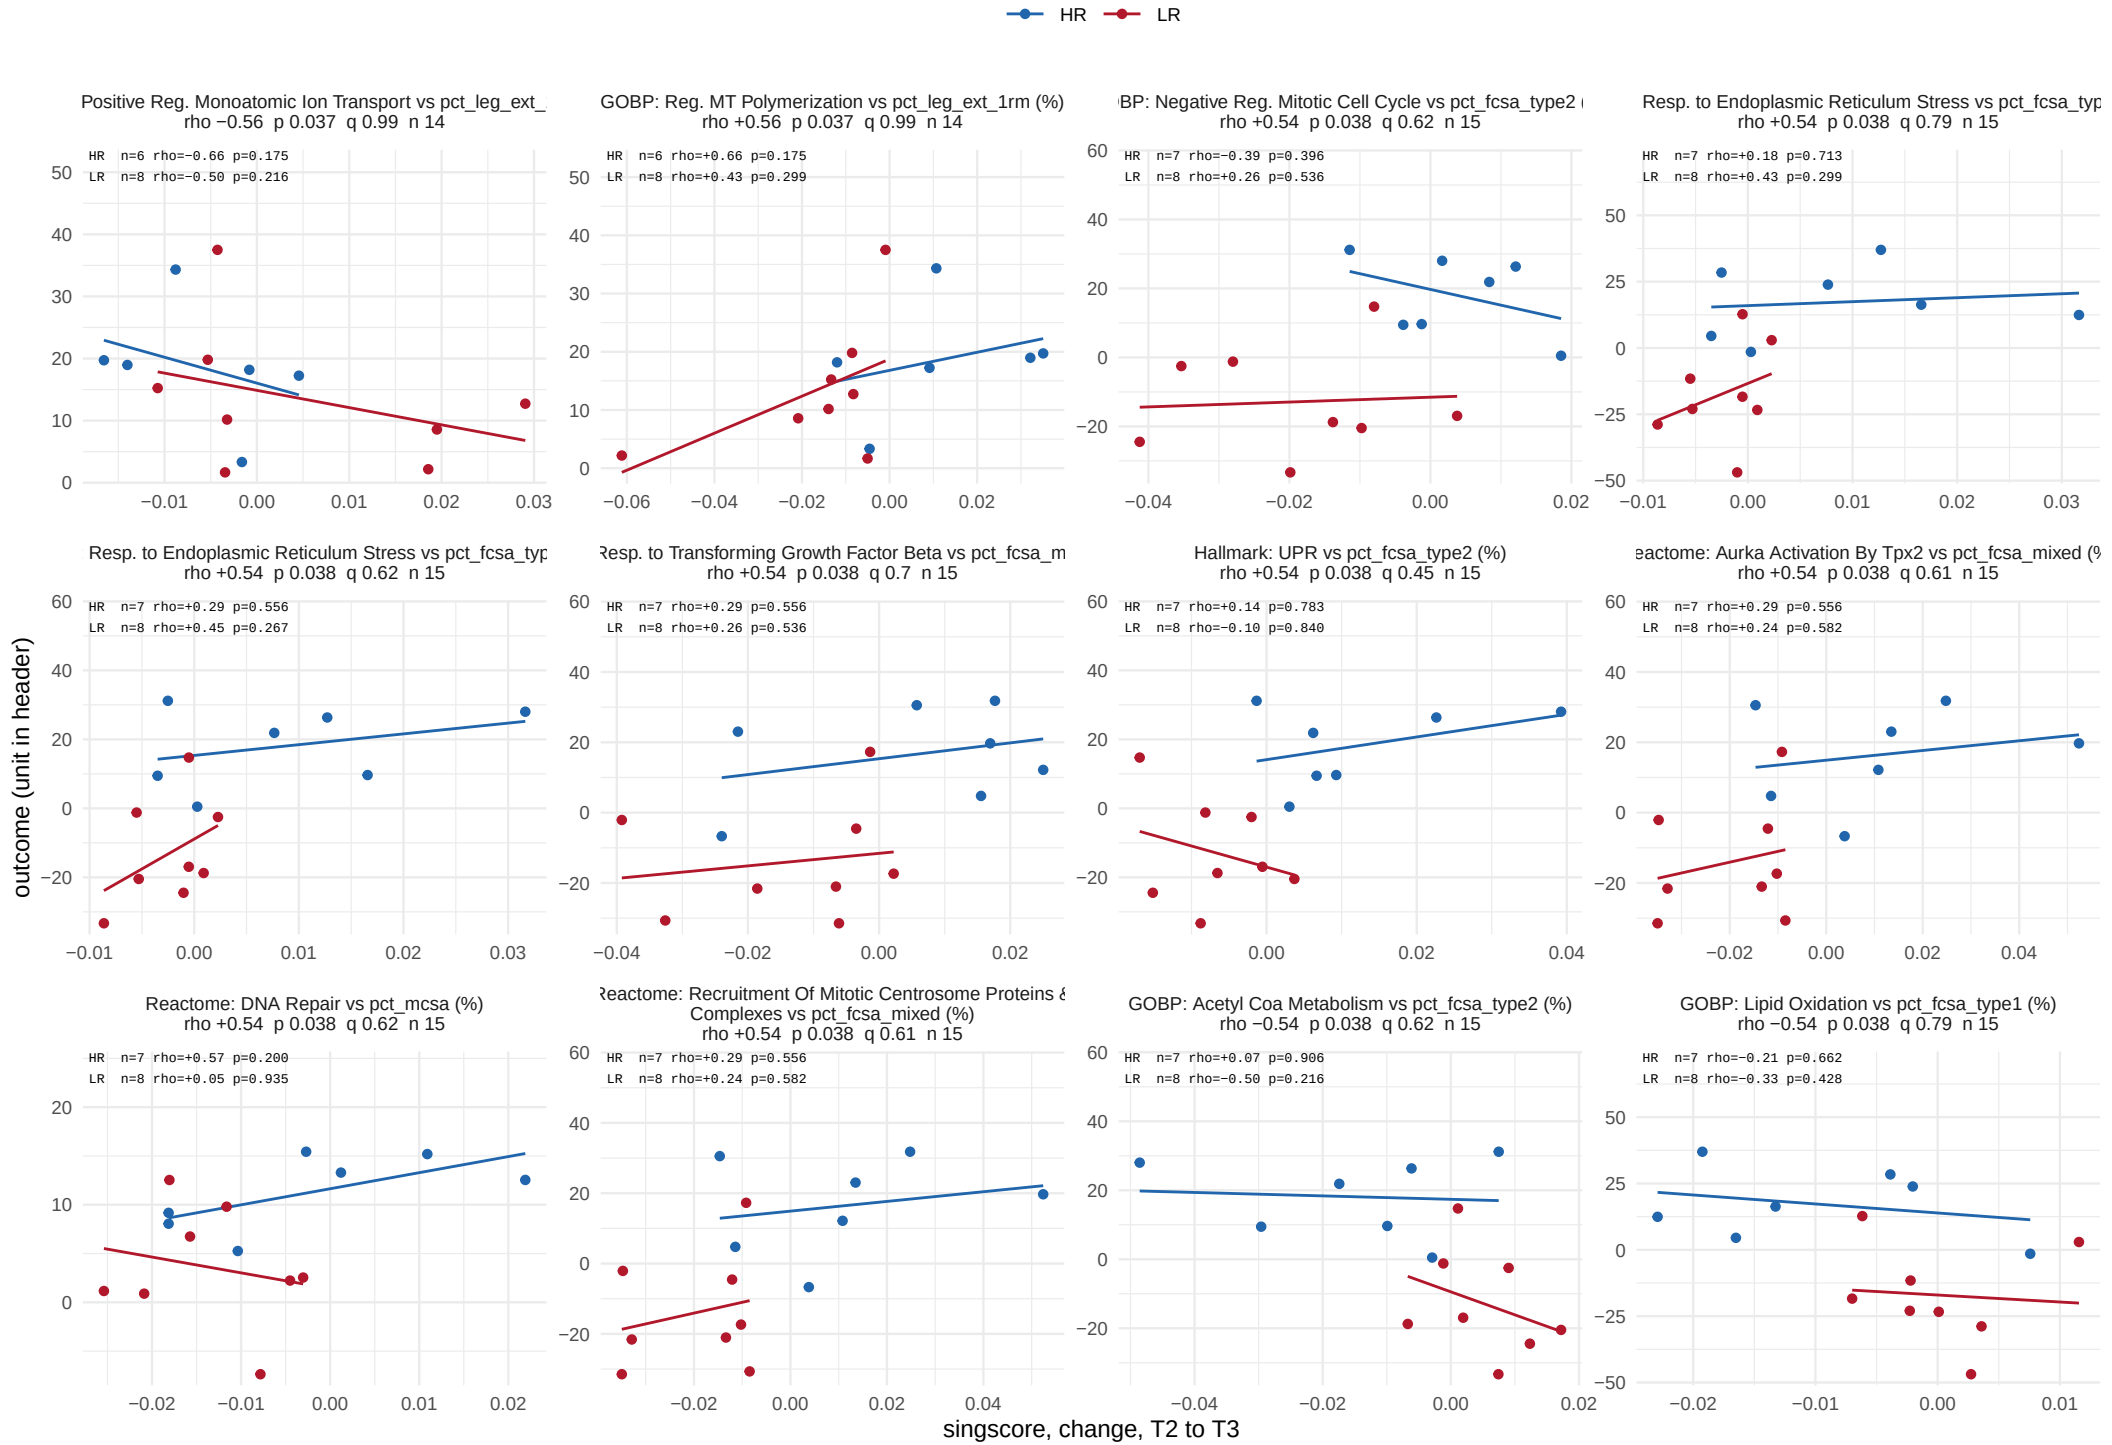


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, acute window


573 of 11024 feature−outcome pairs at p < 0.05, 4 at BH < 0.05. Page 39 of 48.

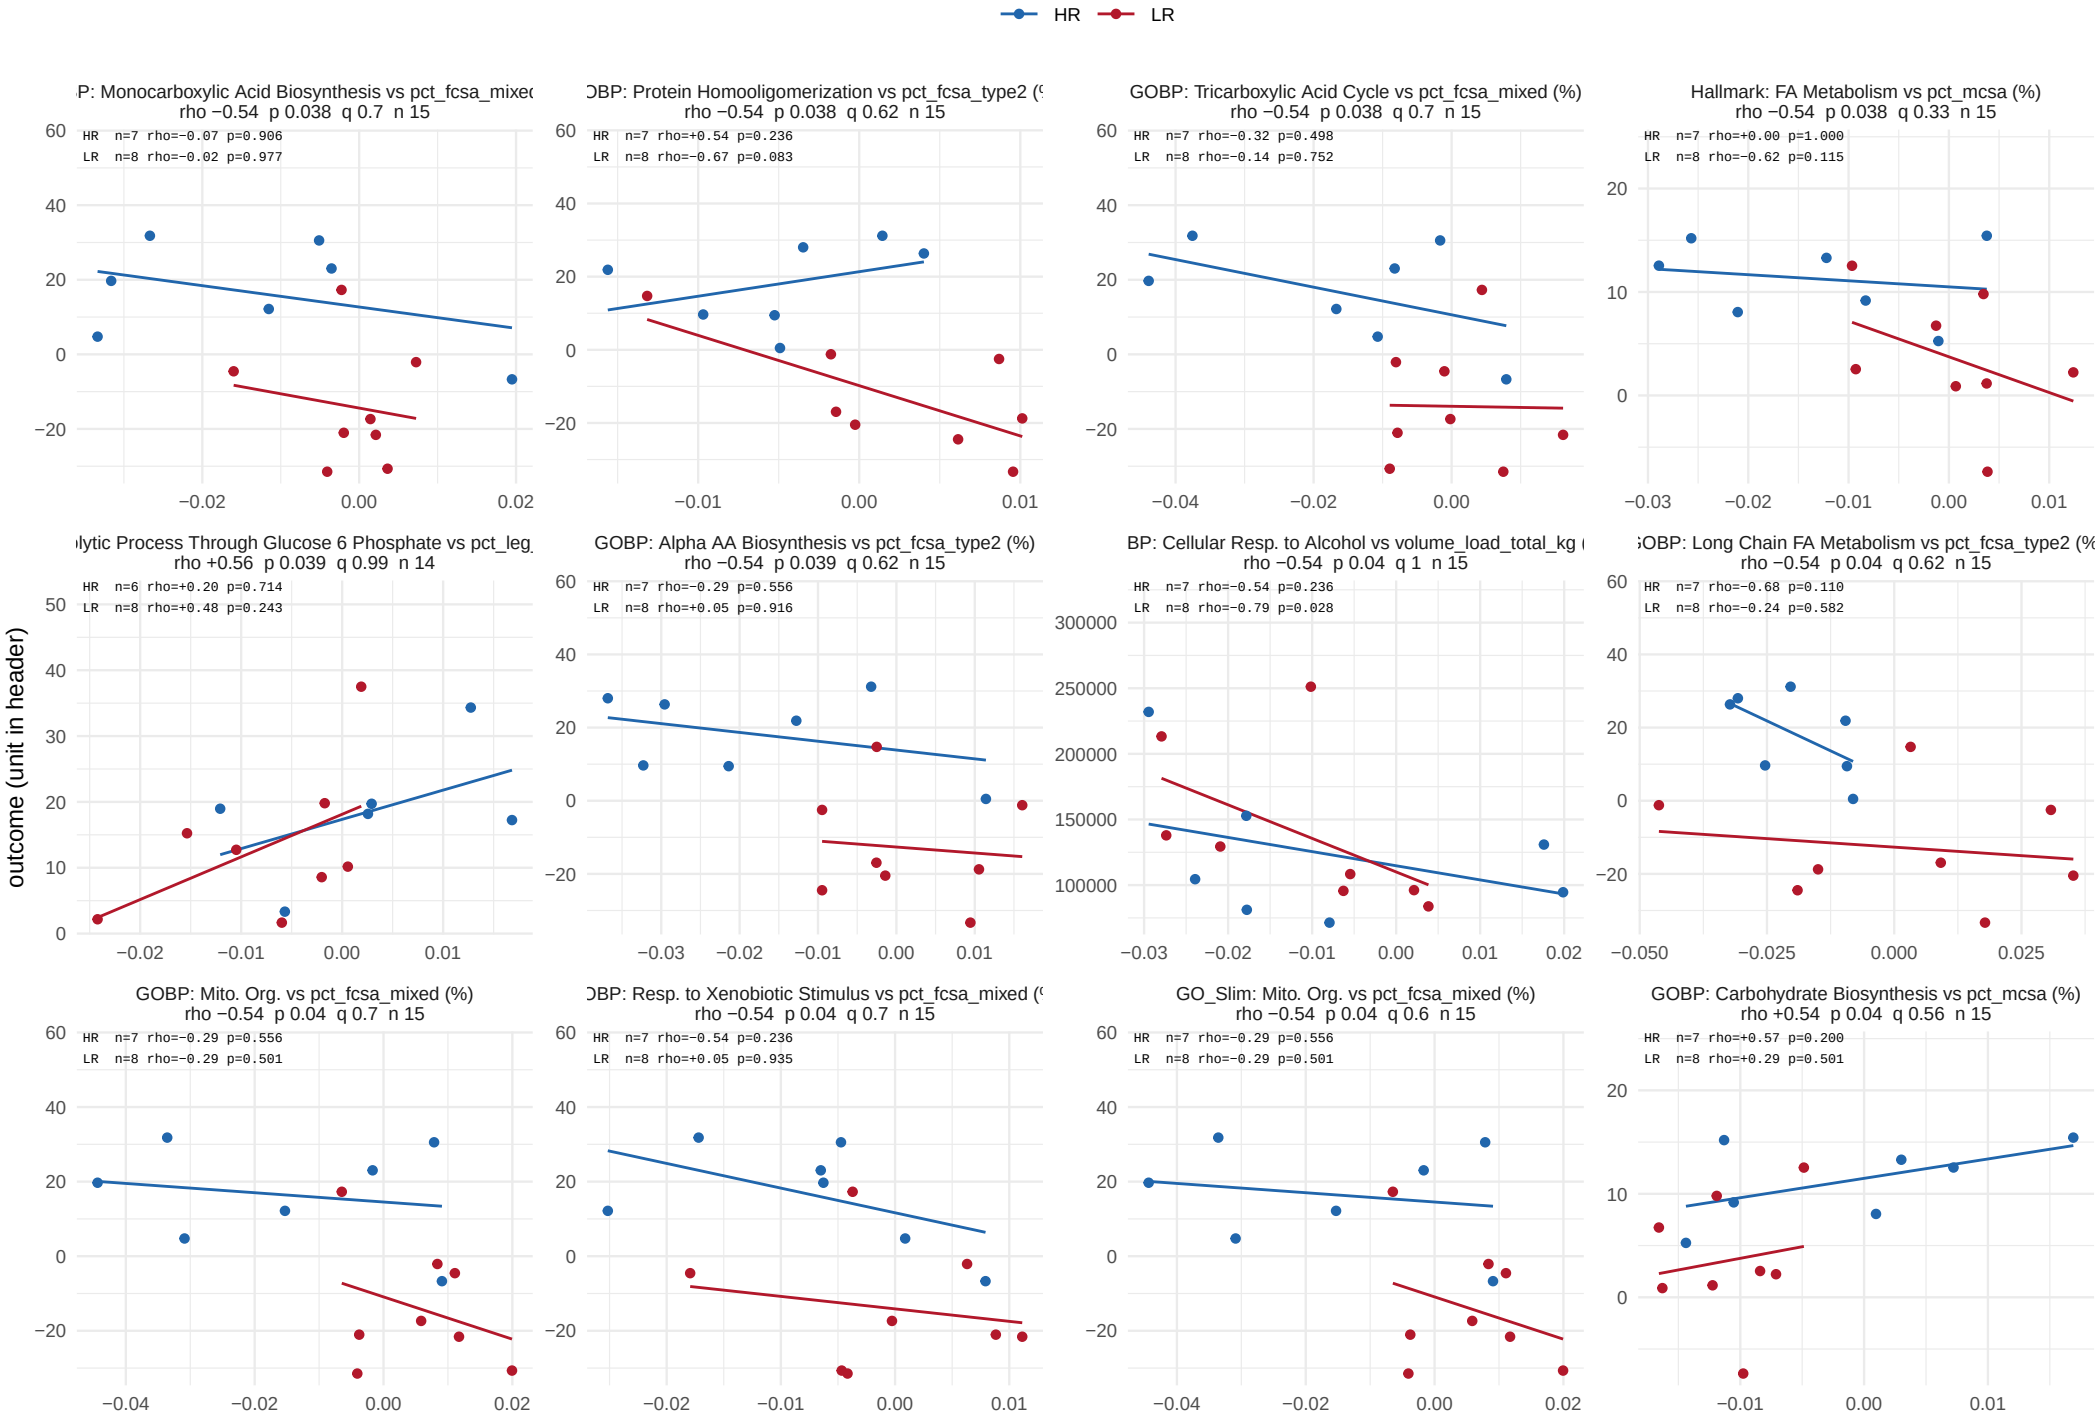


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, acute window


573 of 11024 feature−outcome pairs at p < 0.05, 4 at BH < 0.05. Page 40 of 48.

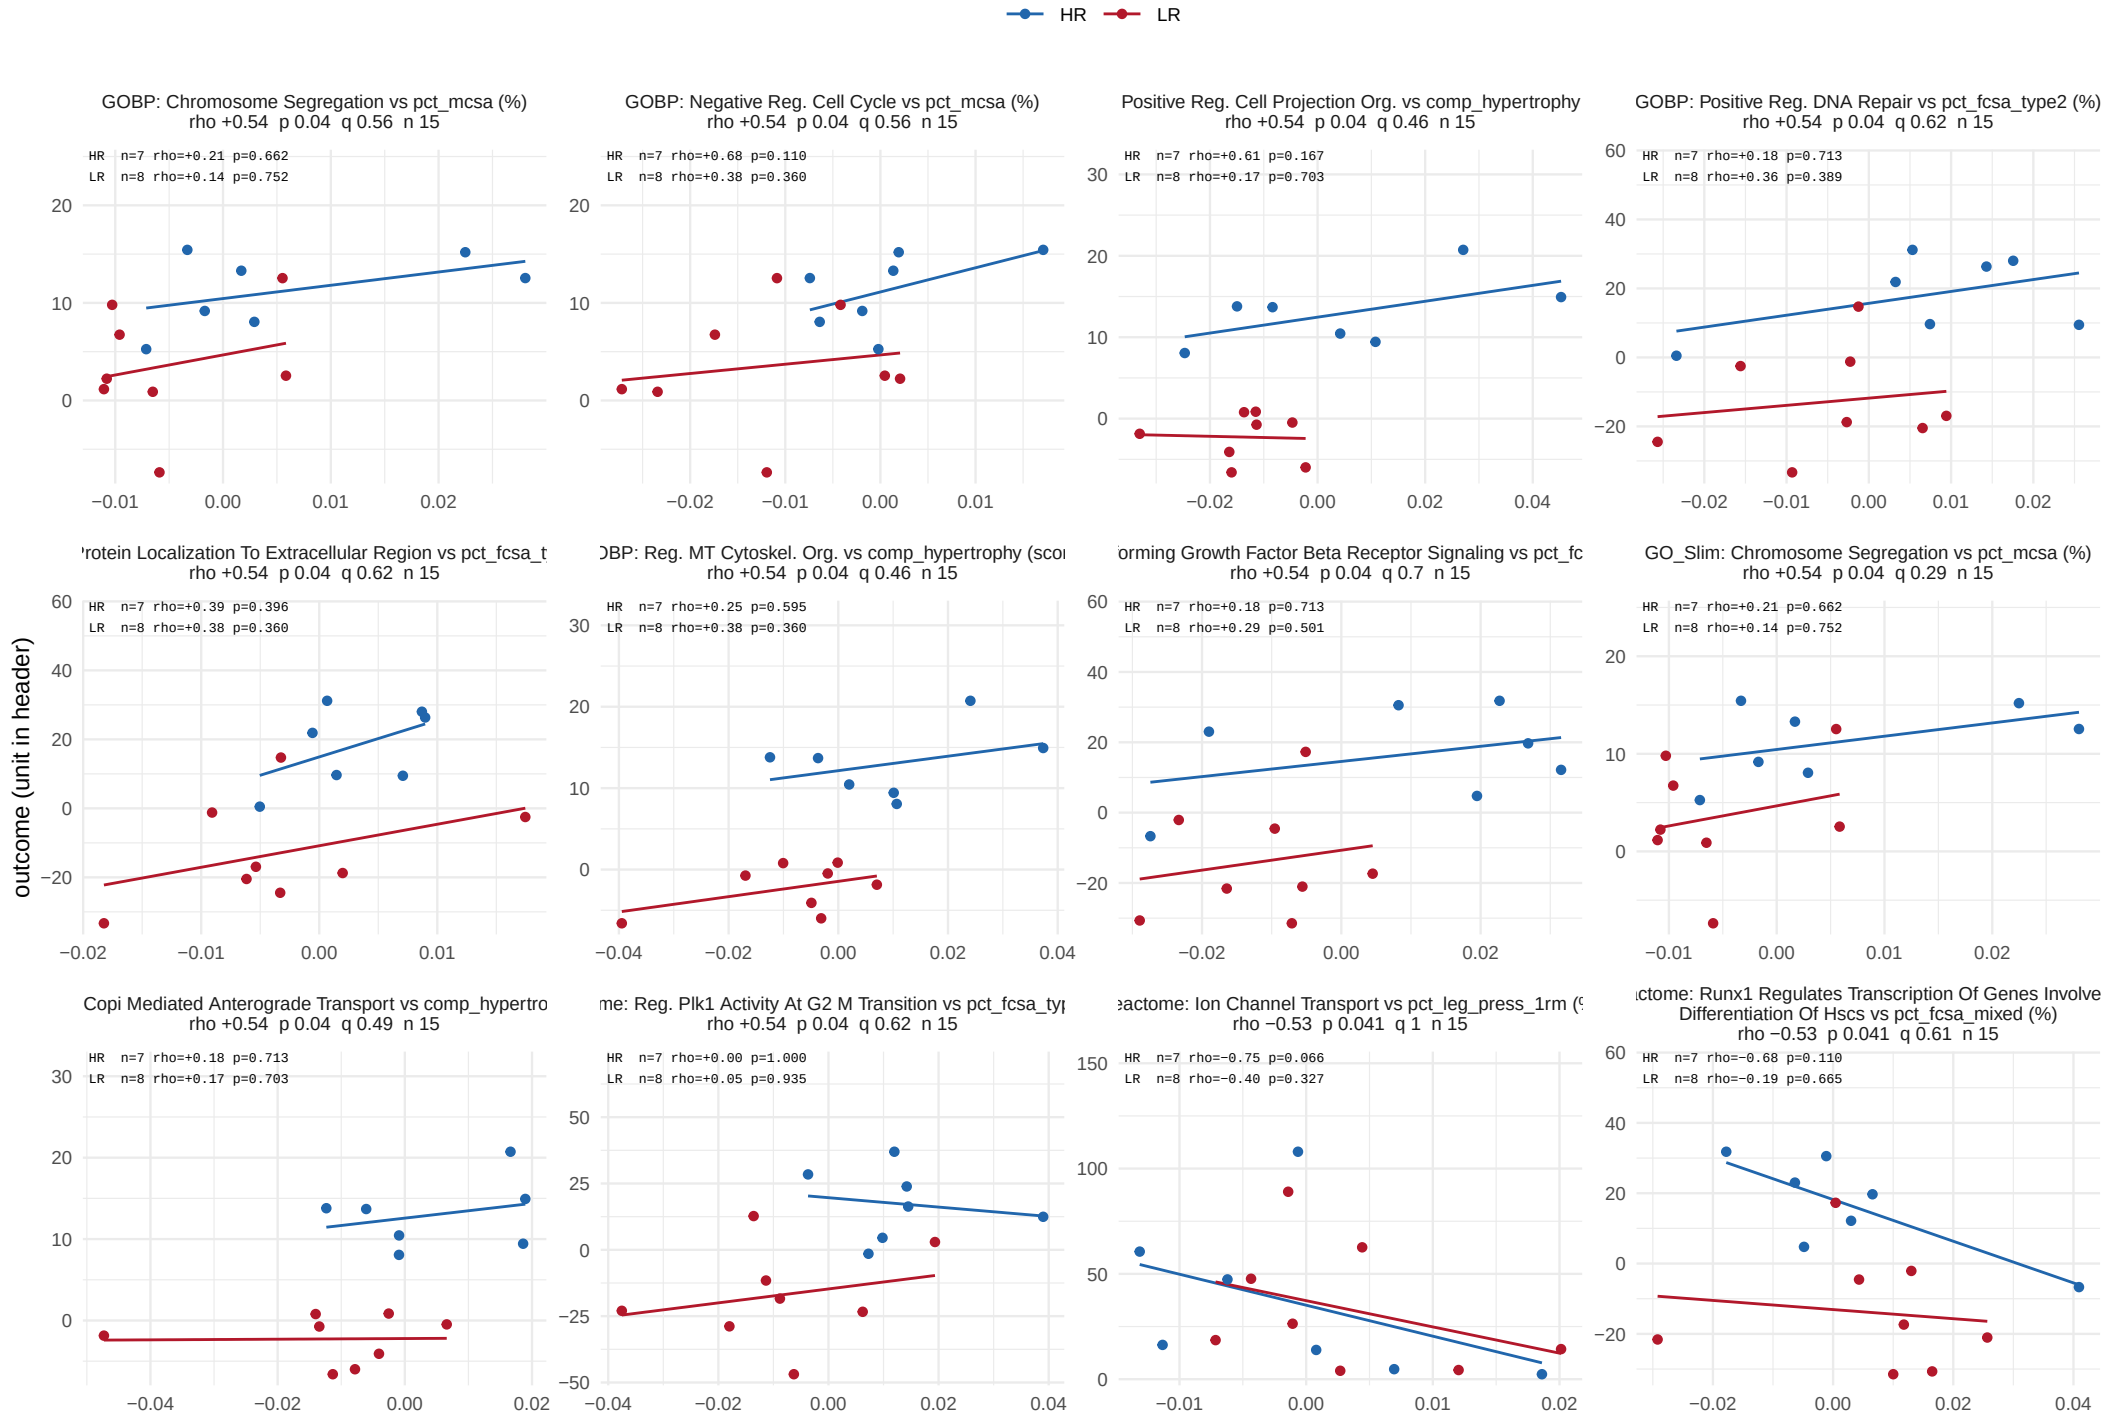


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, acute window


573 of 11024 feature−outcome pairs at p < 0.05, 4 at BH < 0.05. Page 41 of 48.

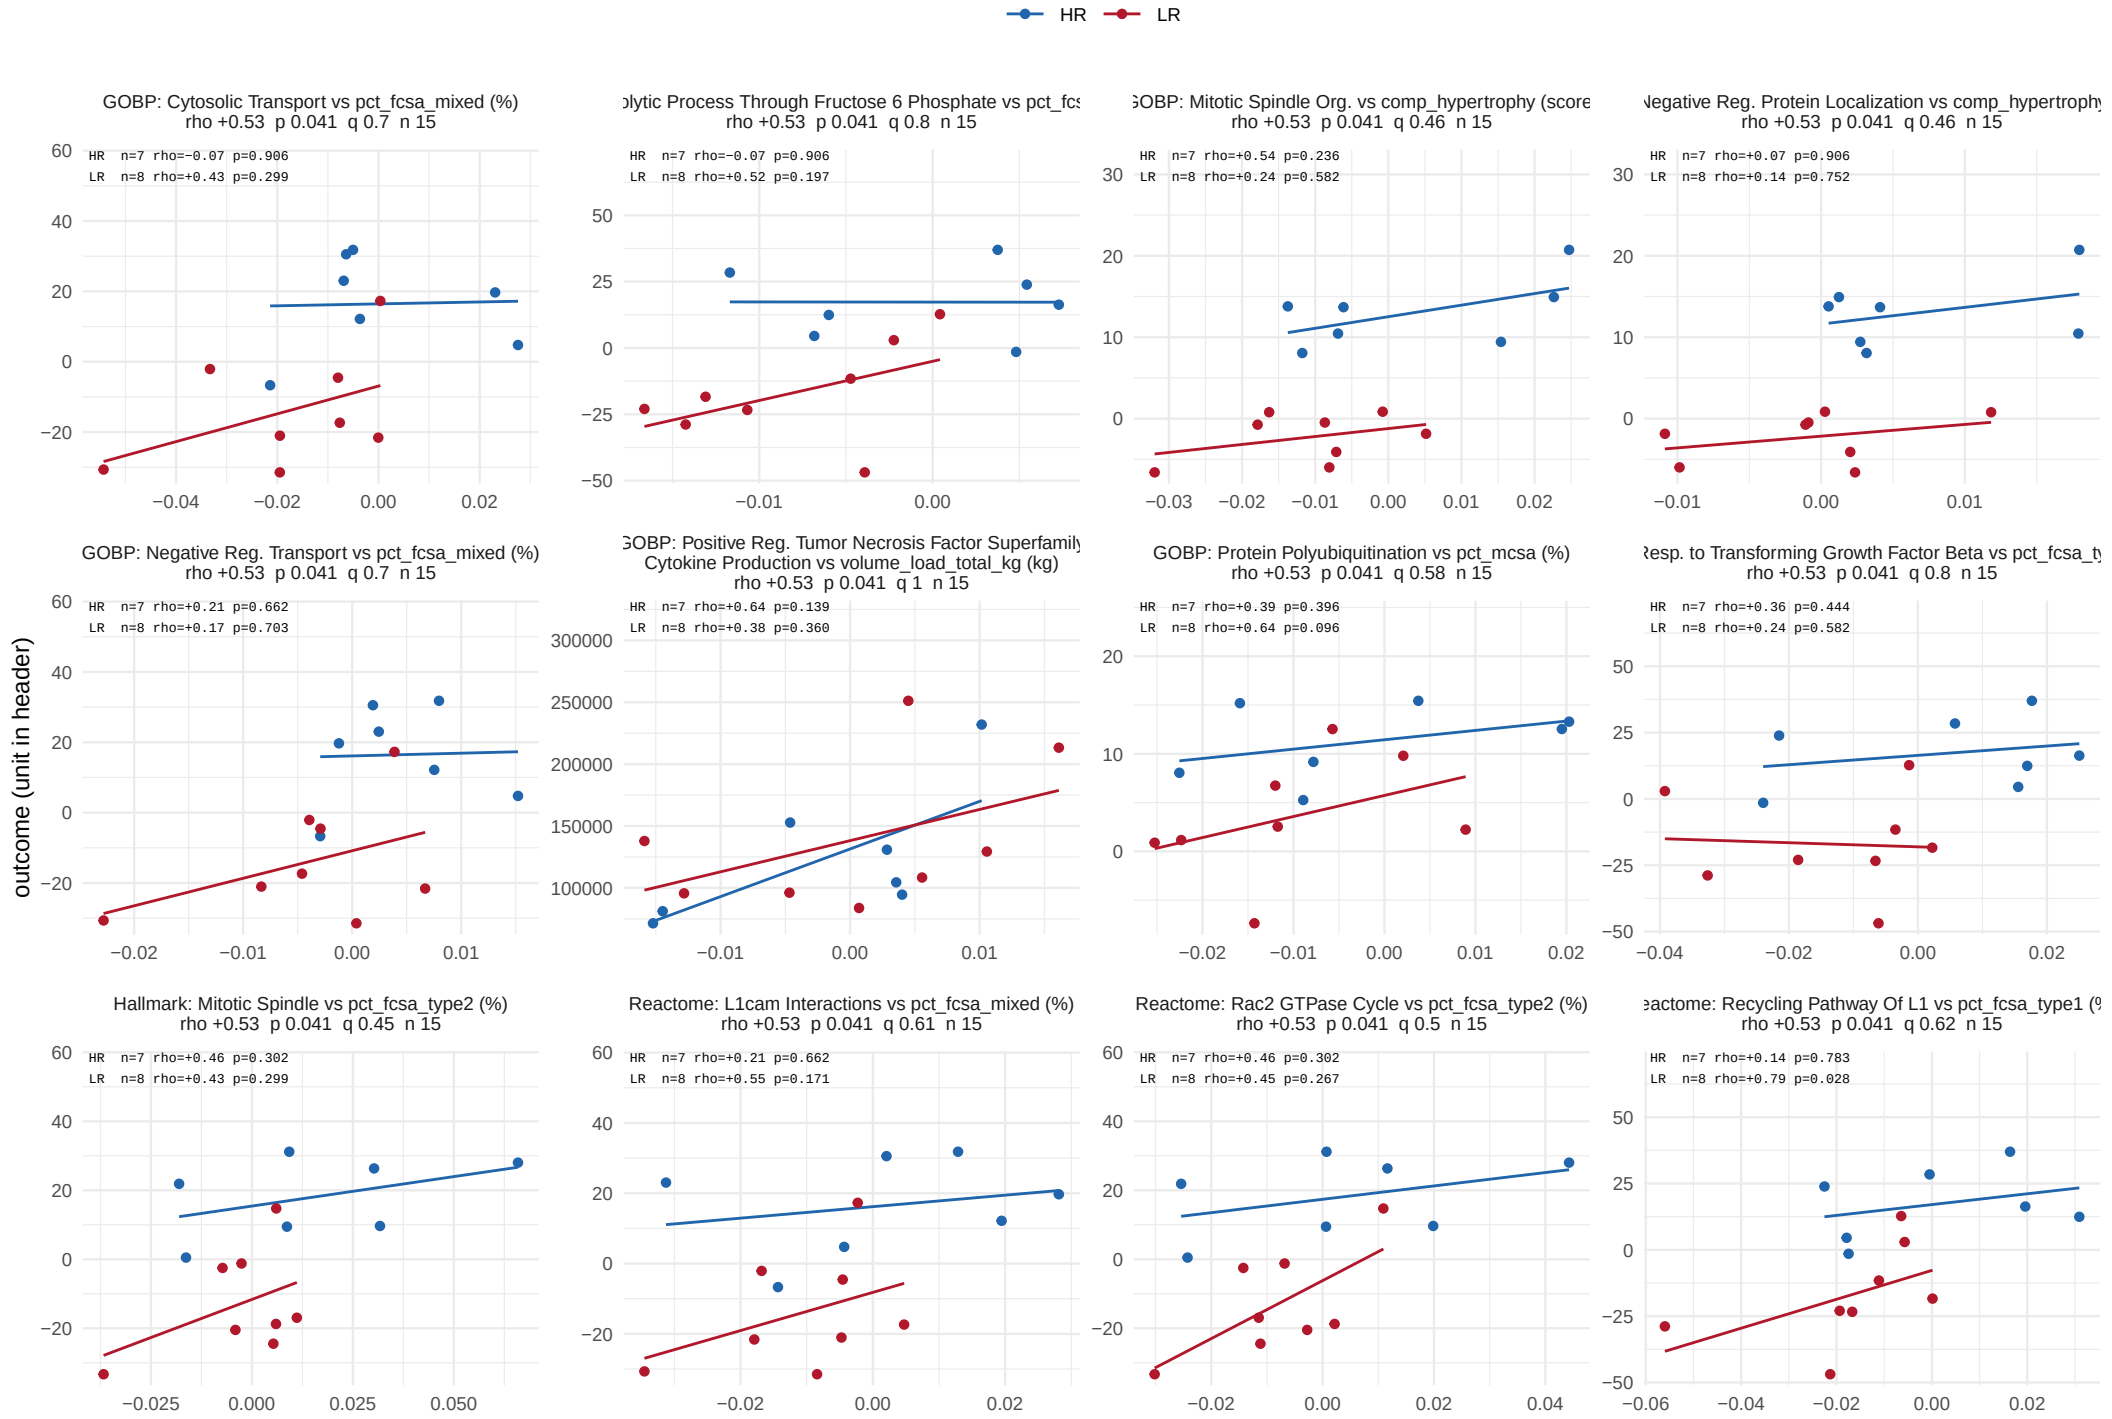


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, acute window


573 of 11024 feature−outcome pairs at p < 0.05, 4 at BH < 0.05. Page 42 of 48.

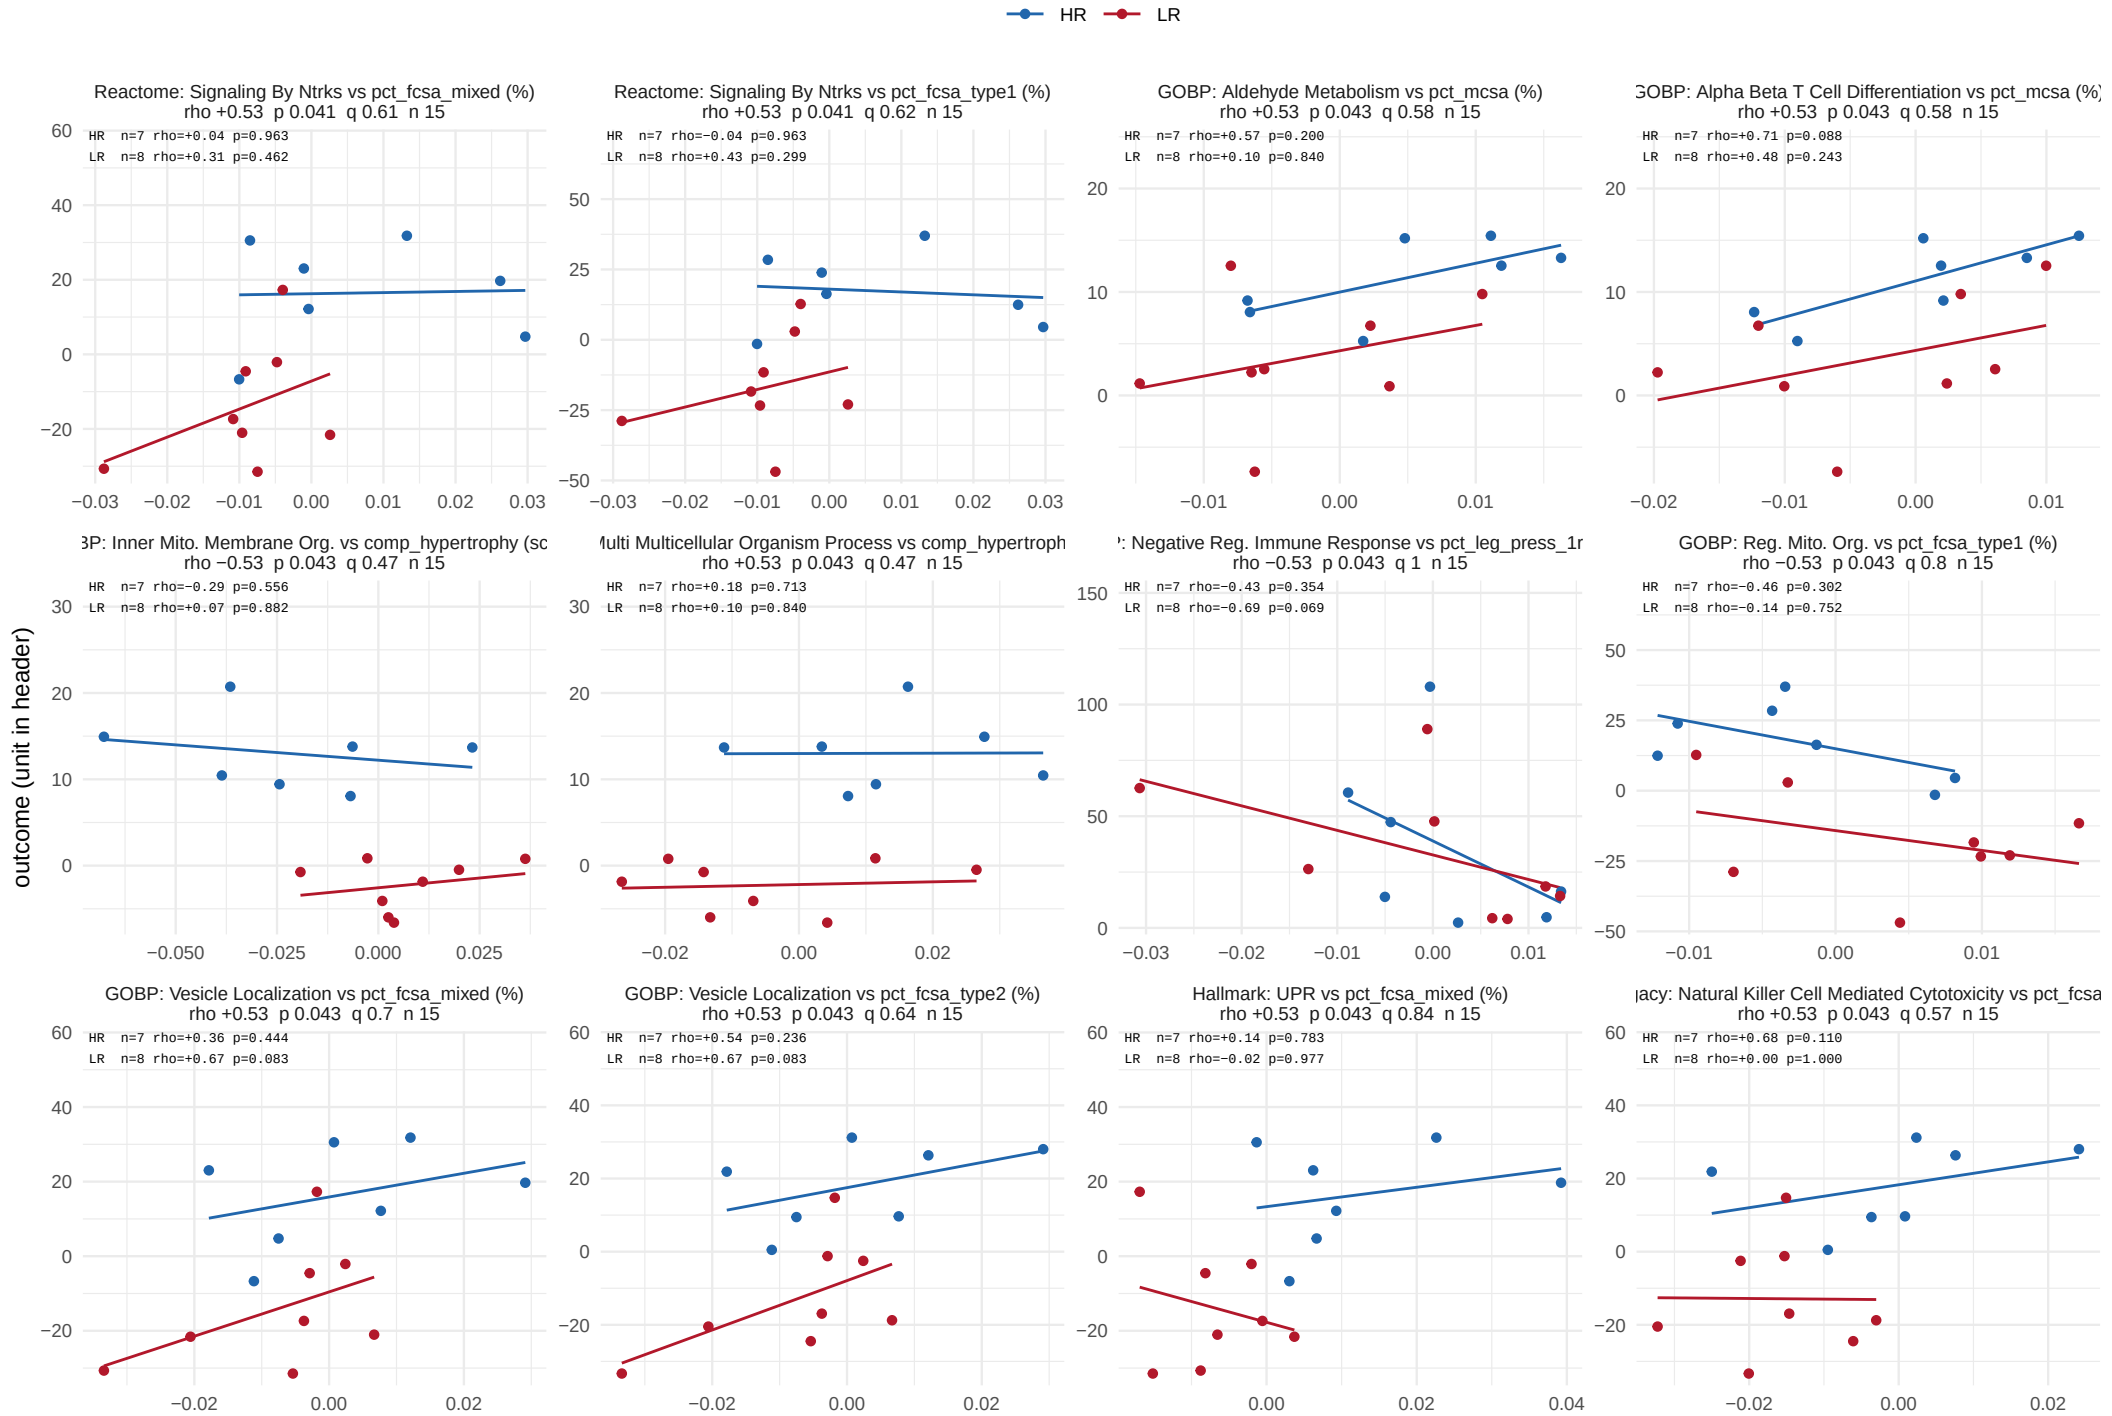


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, acute window


573 of 11024 feature−outcome pairs at p < 0.05, 4 at BH < 0.05. Page 43 of 48.

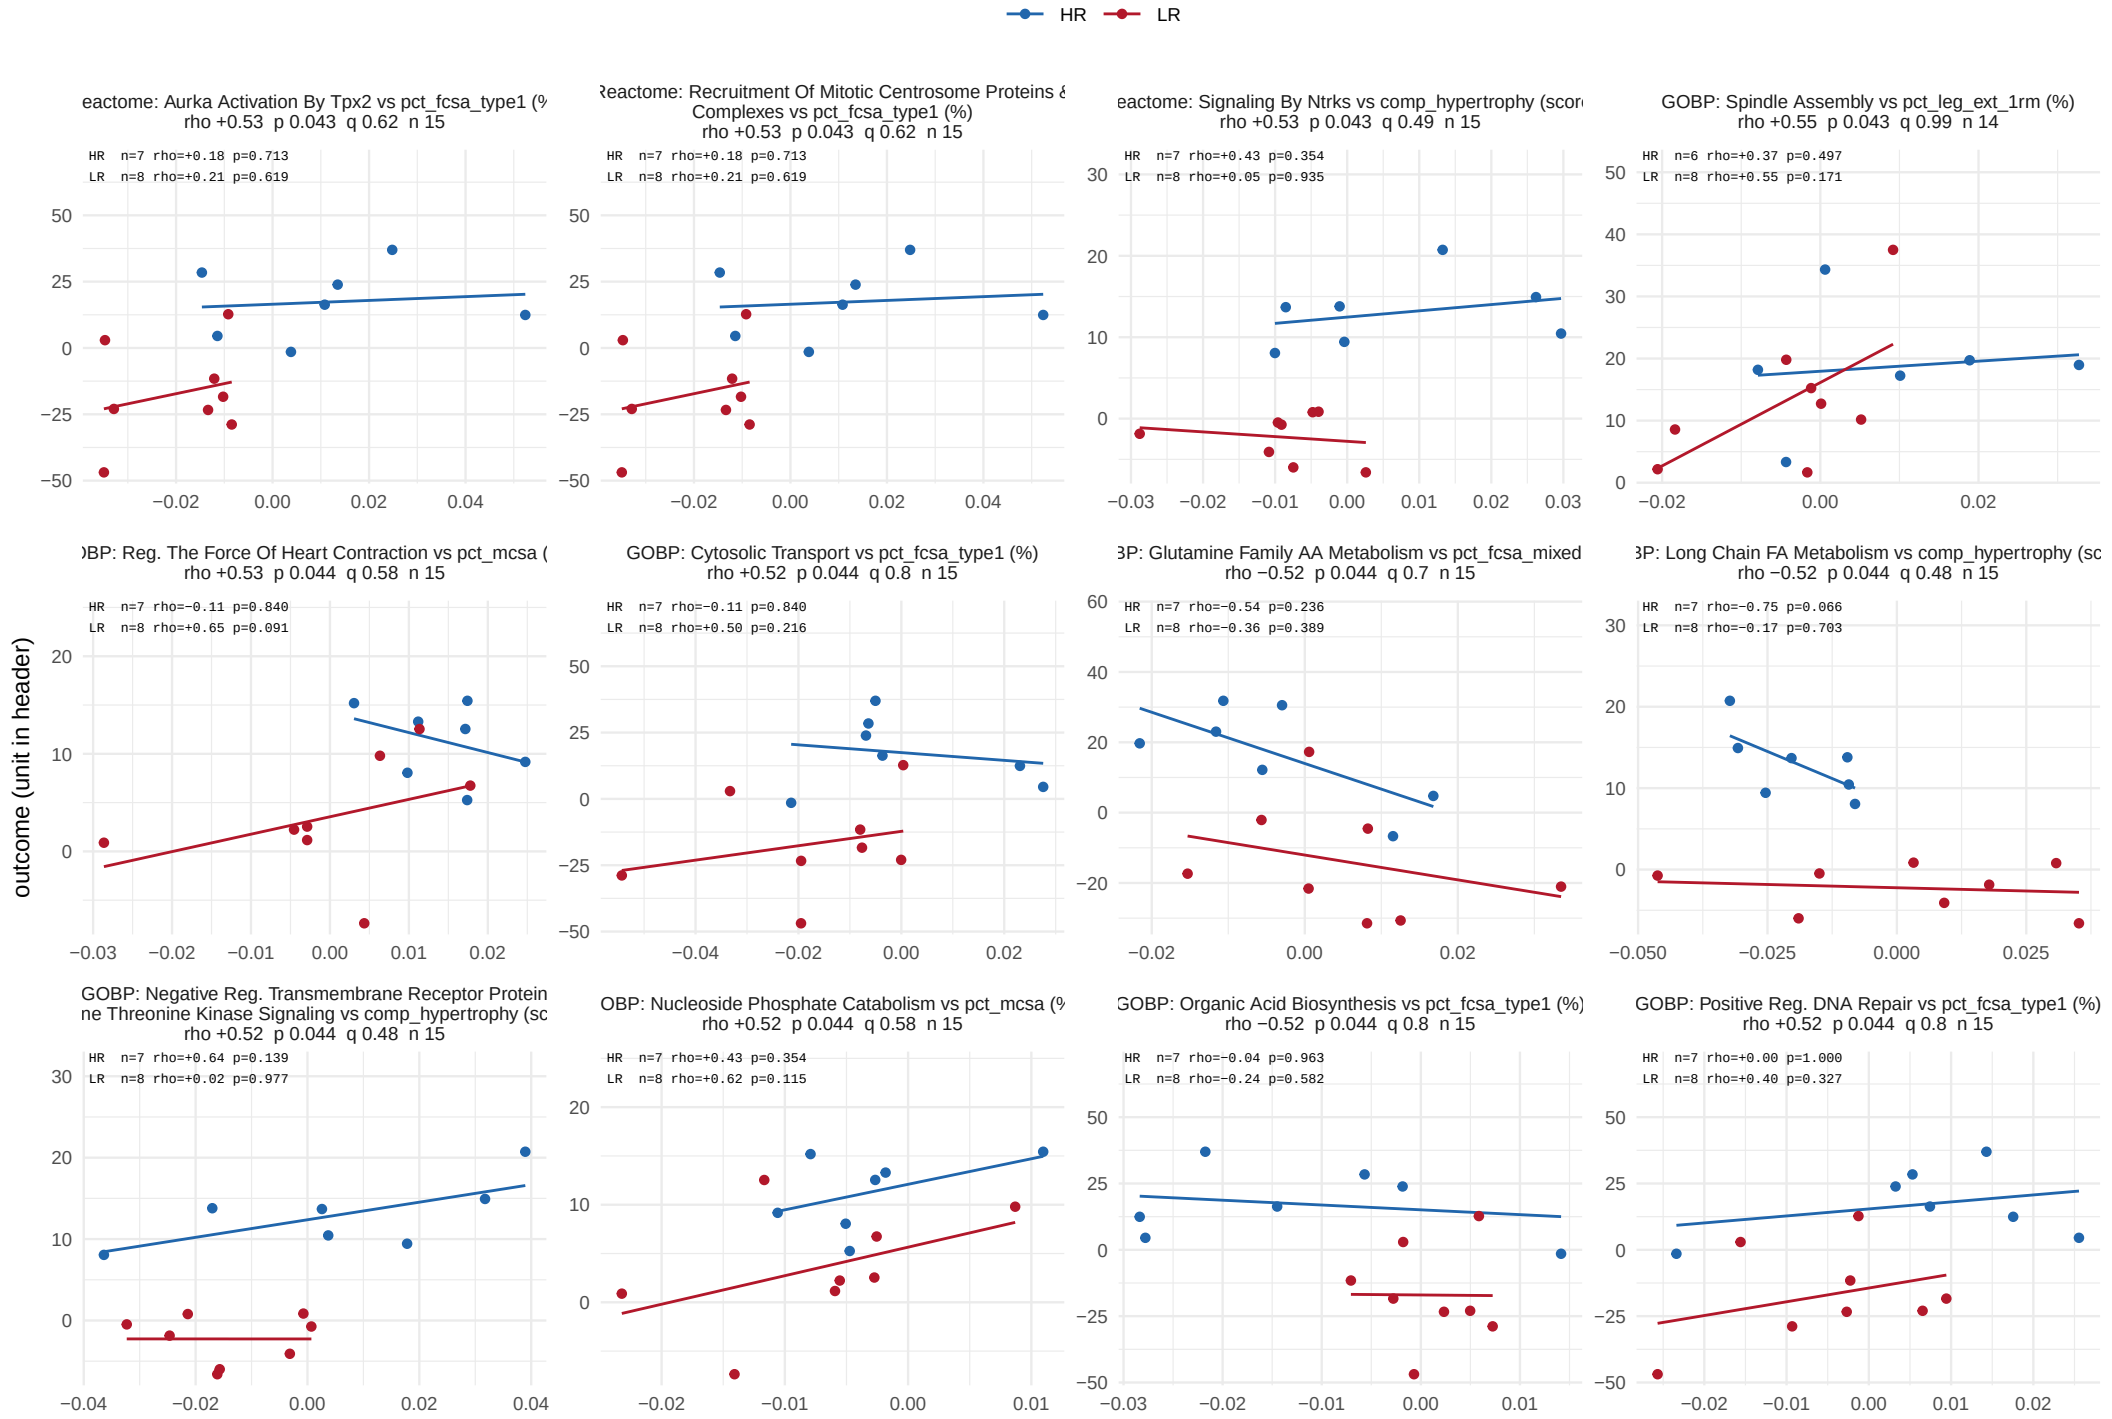


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, acute window


573 of 11024 feature−outcome pairs at p < 0.05, 4 at BH < 0.05. Page 44 of 48.

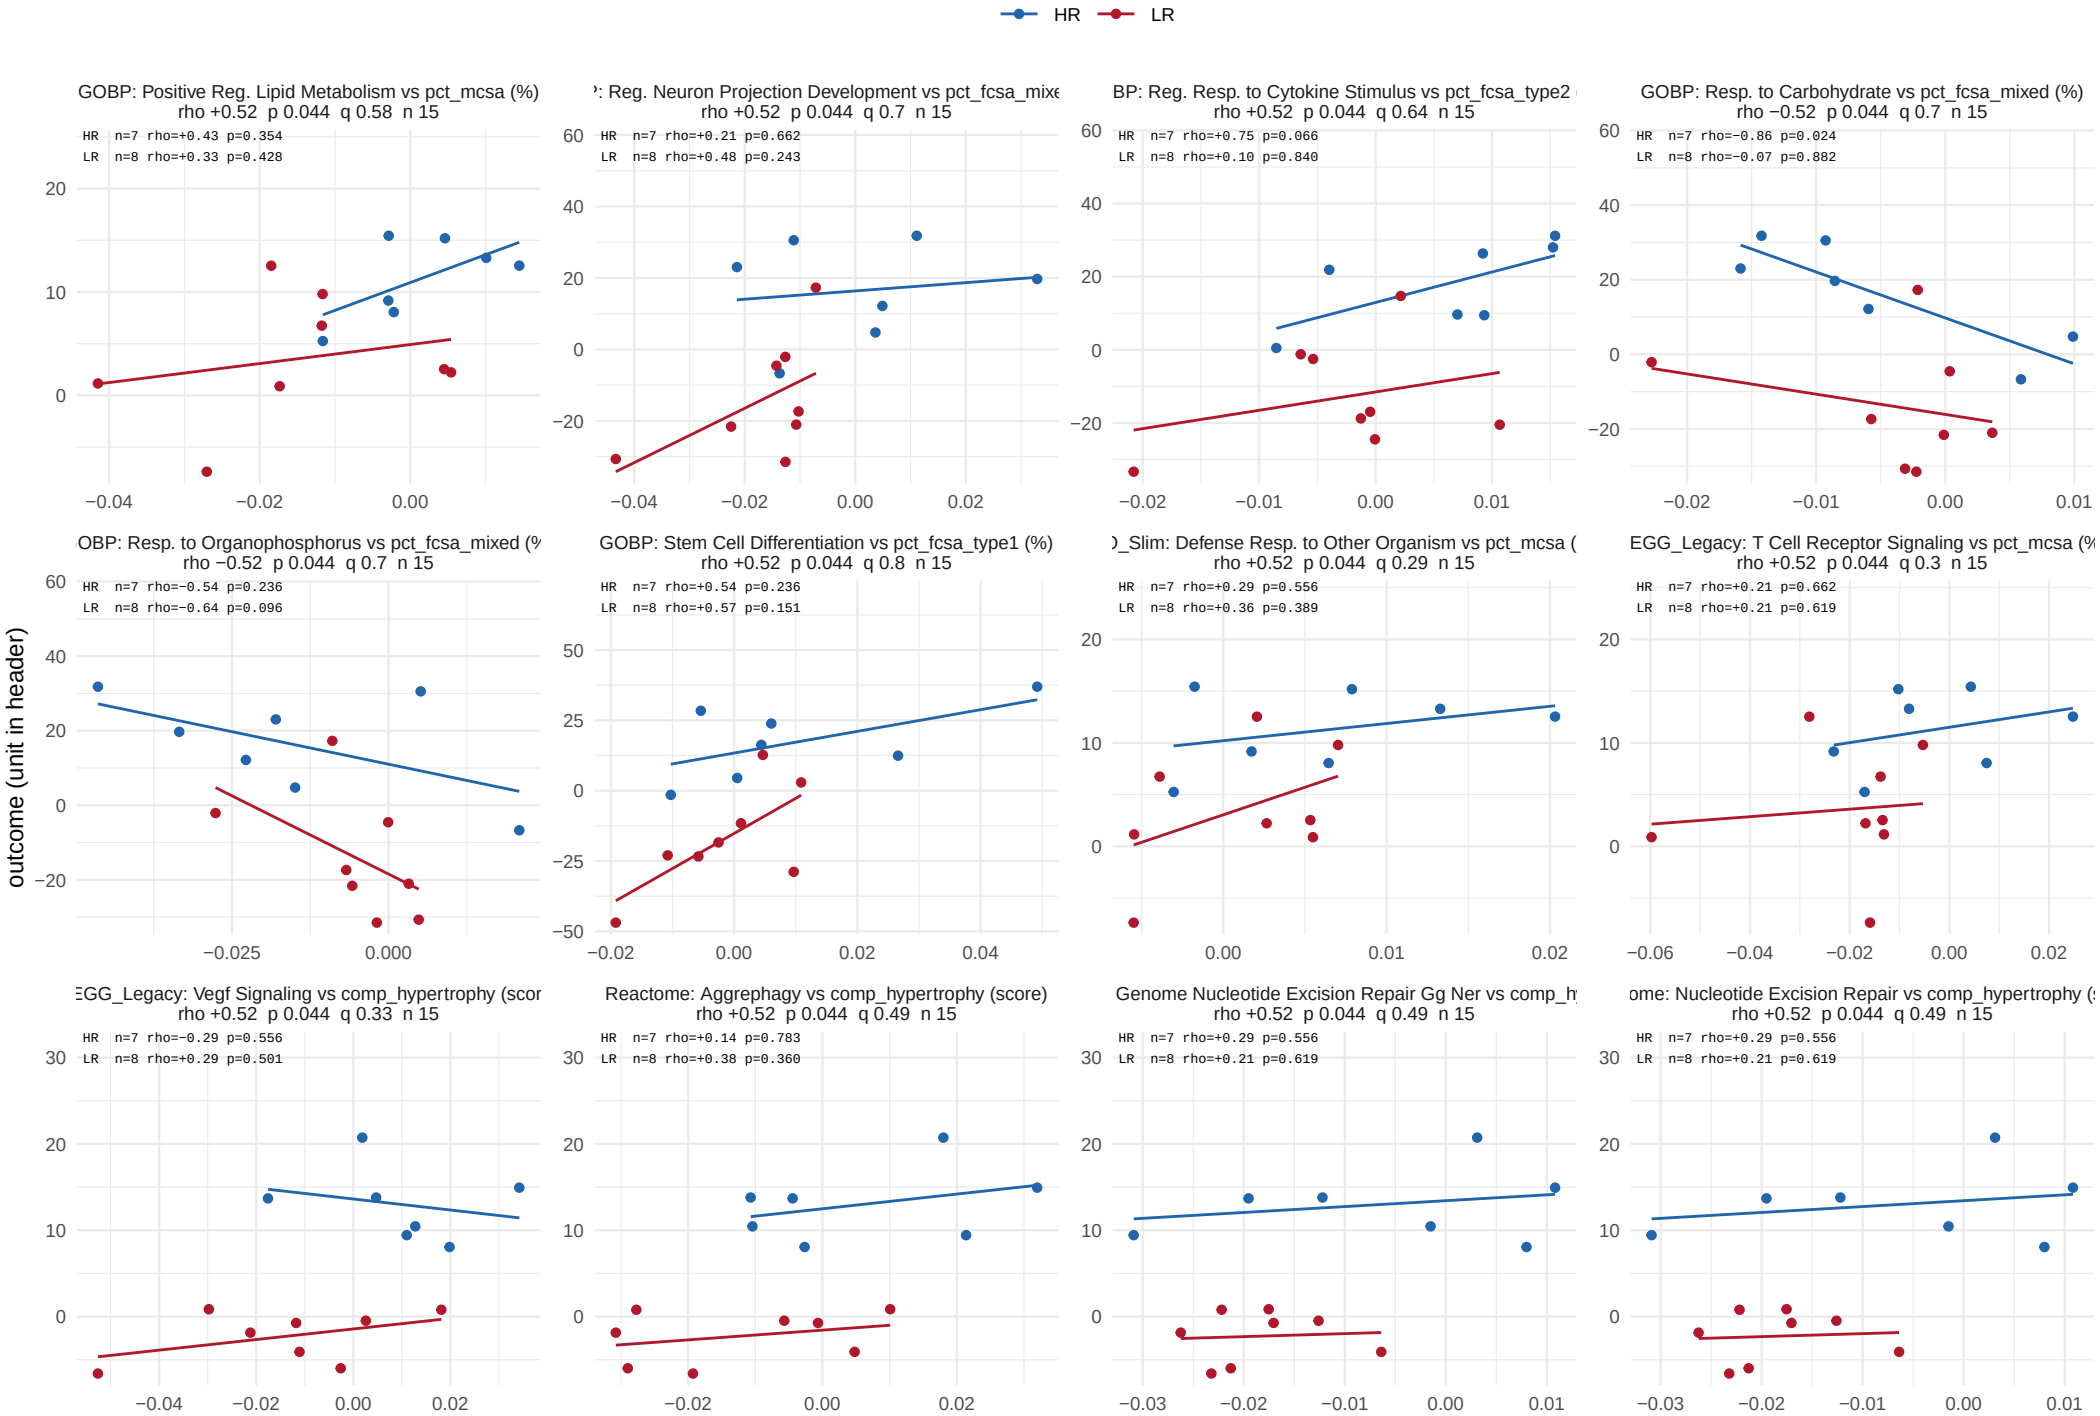


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, acute window


573 of 11024 feature−outcome pairs at p < 0.05, 4 at BH < 0.05. Page 45 of 48.

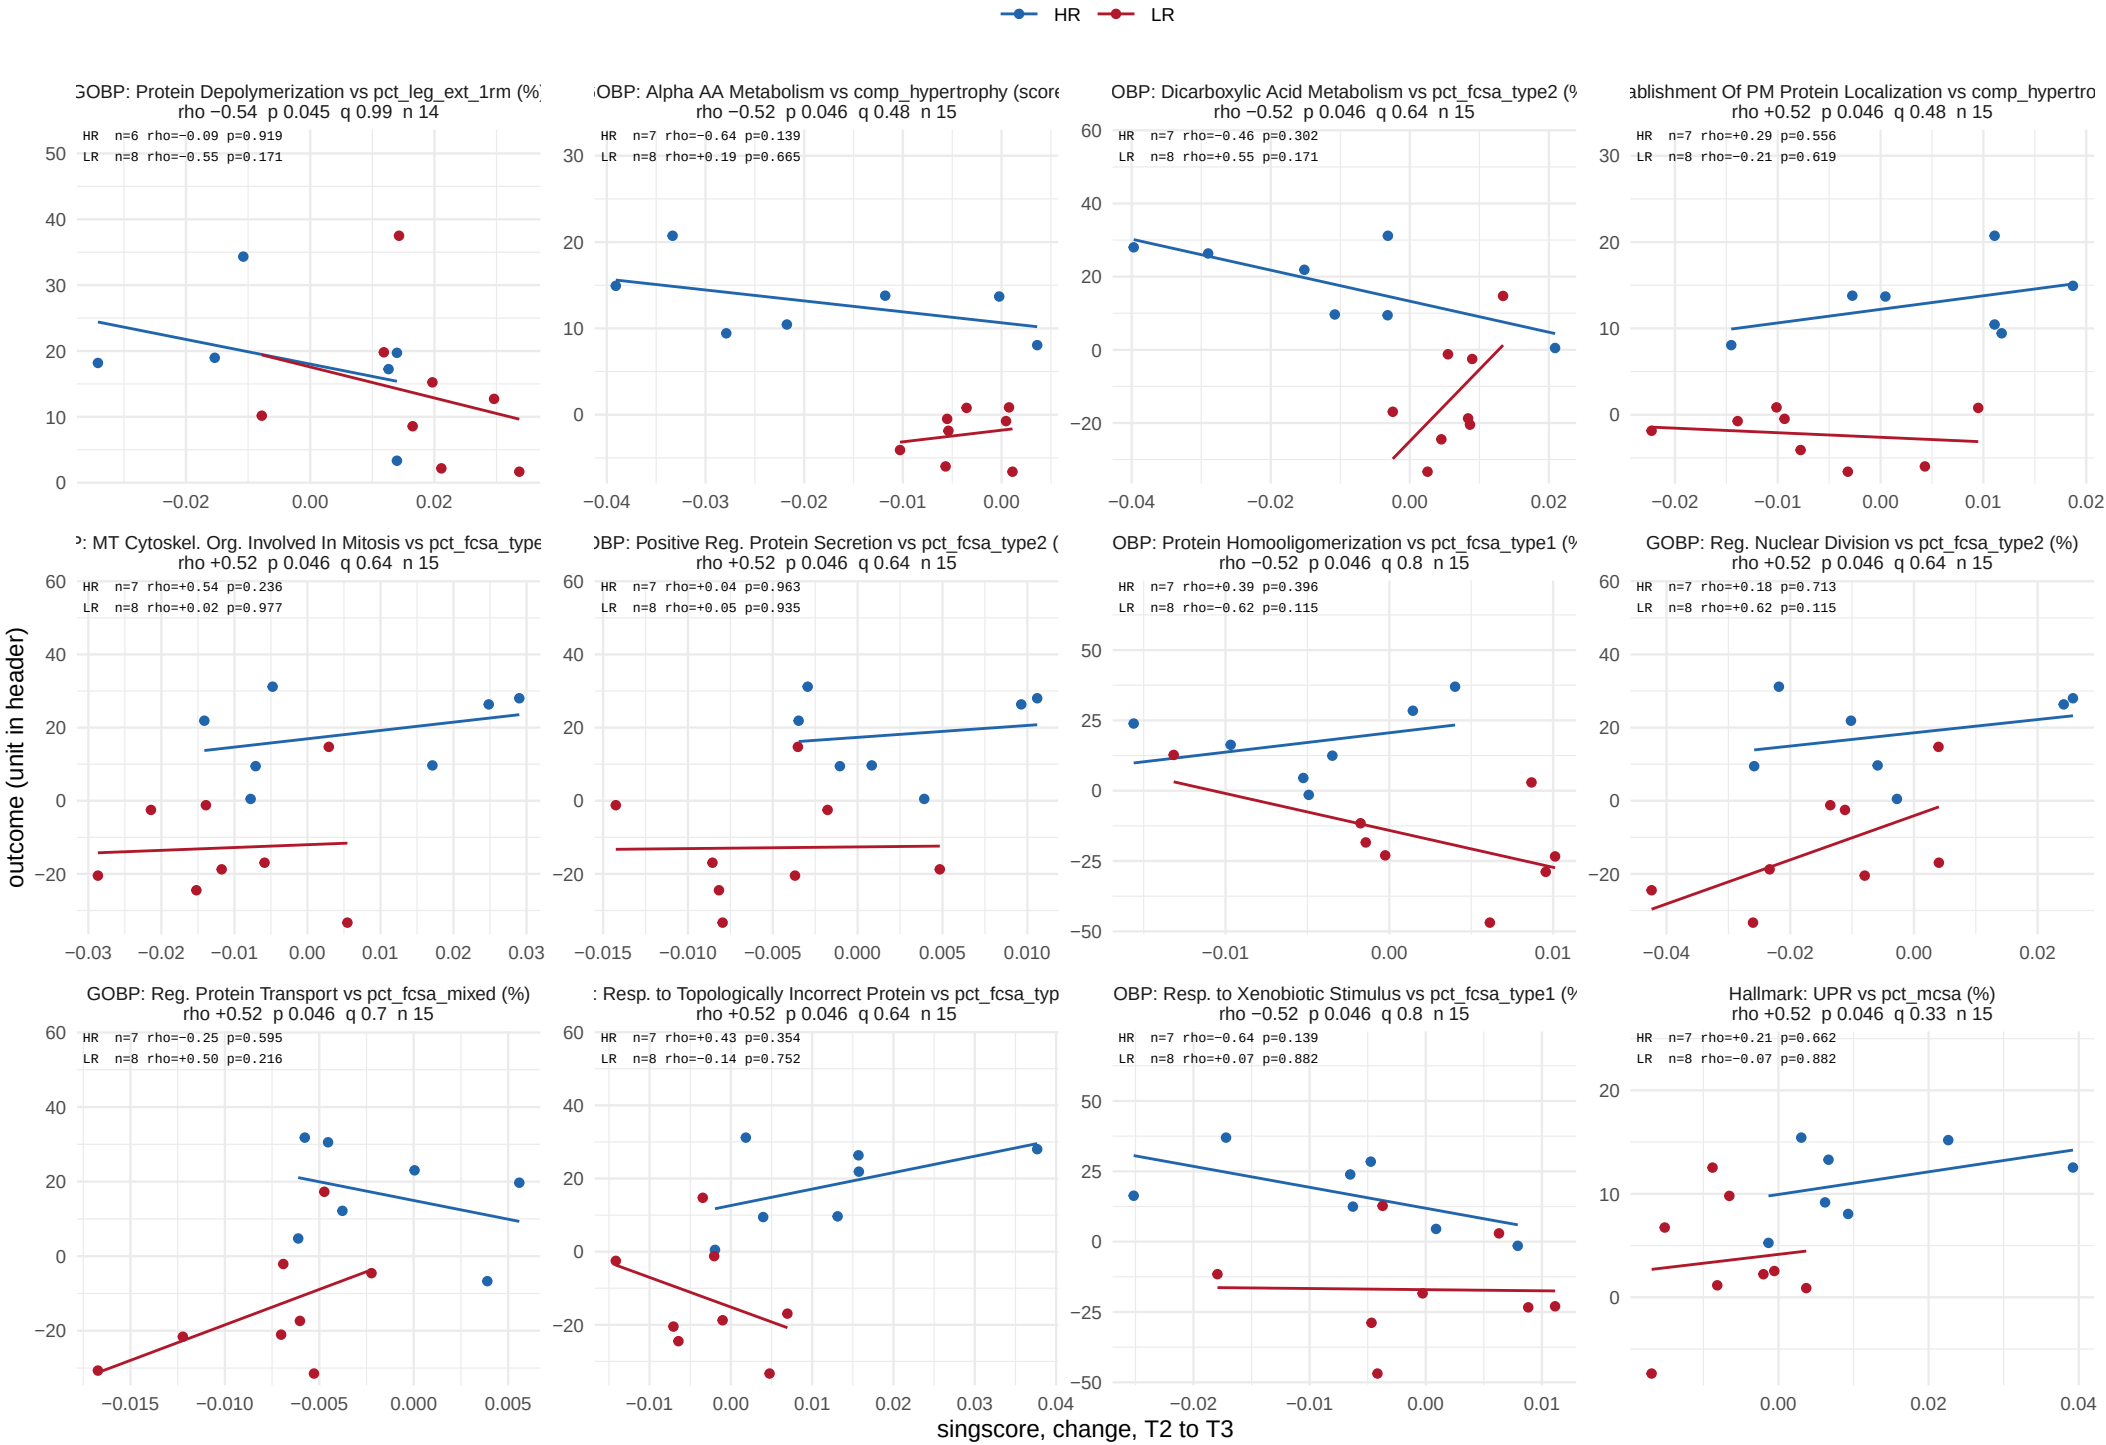


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, acute window


573 of 11024 feature−outcome pairs at p < 0.05, 4 at BH < 0.05. Page 46 of 48.

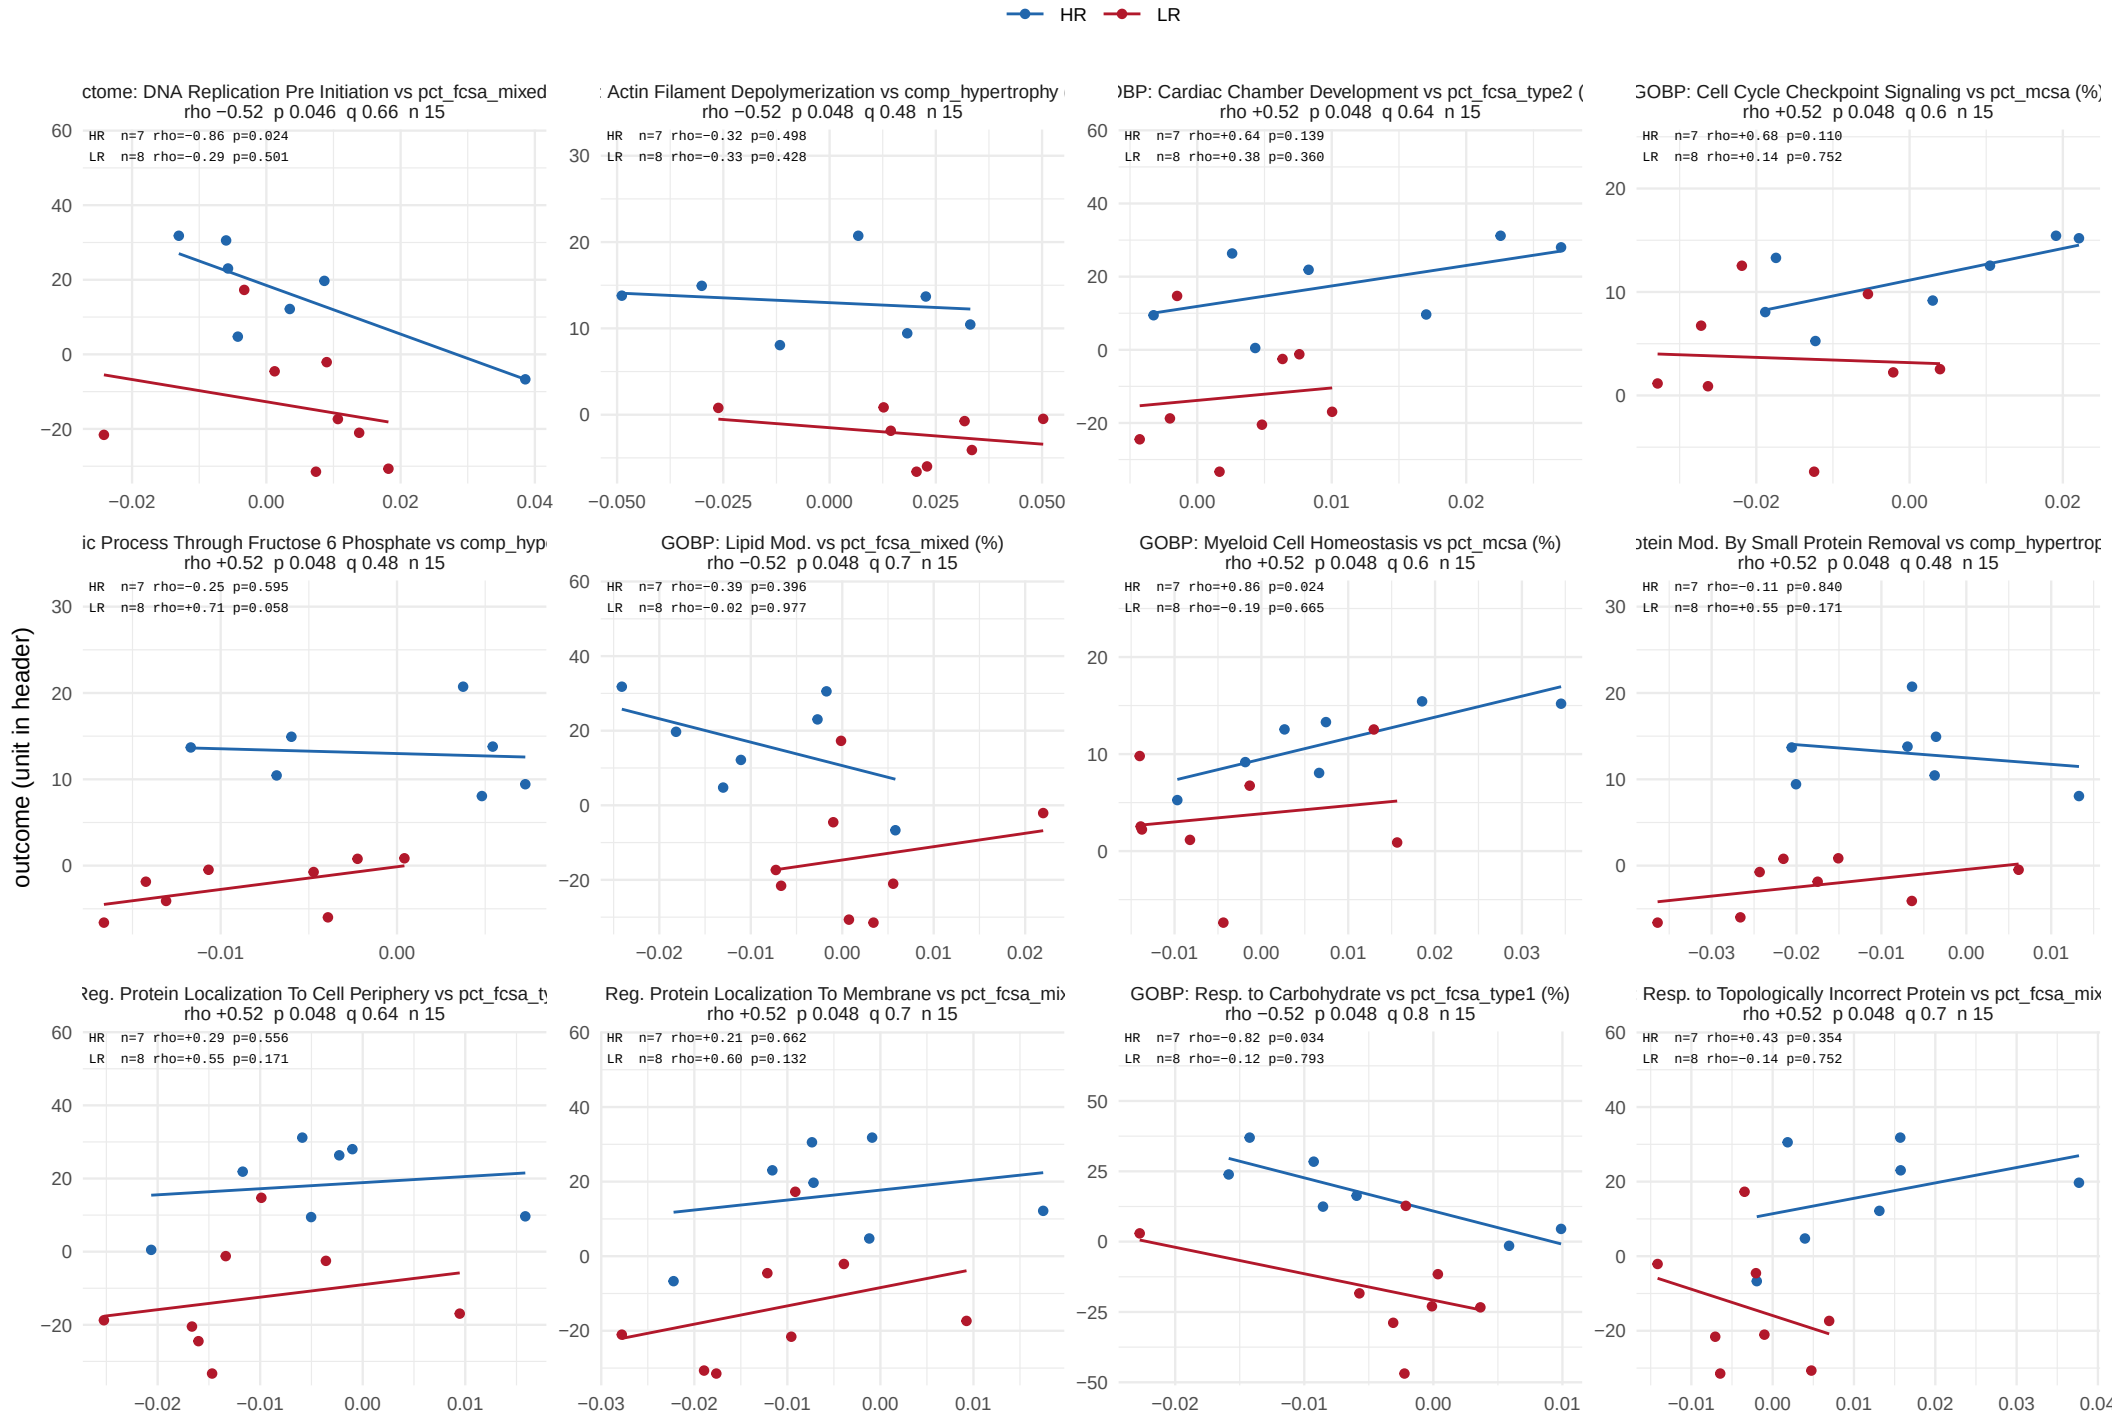


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Change score, acute window


573 of 11024 feature−outcome pairs at p < 0.05, 4 at BH < 0.05. Page 47 of 48.

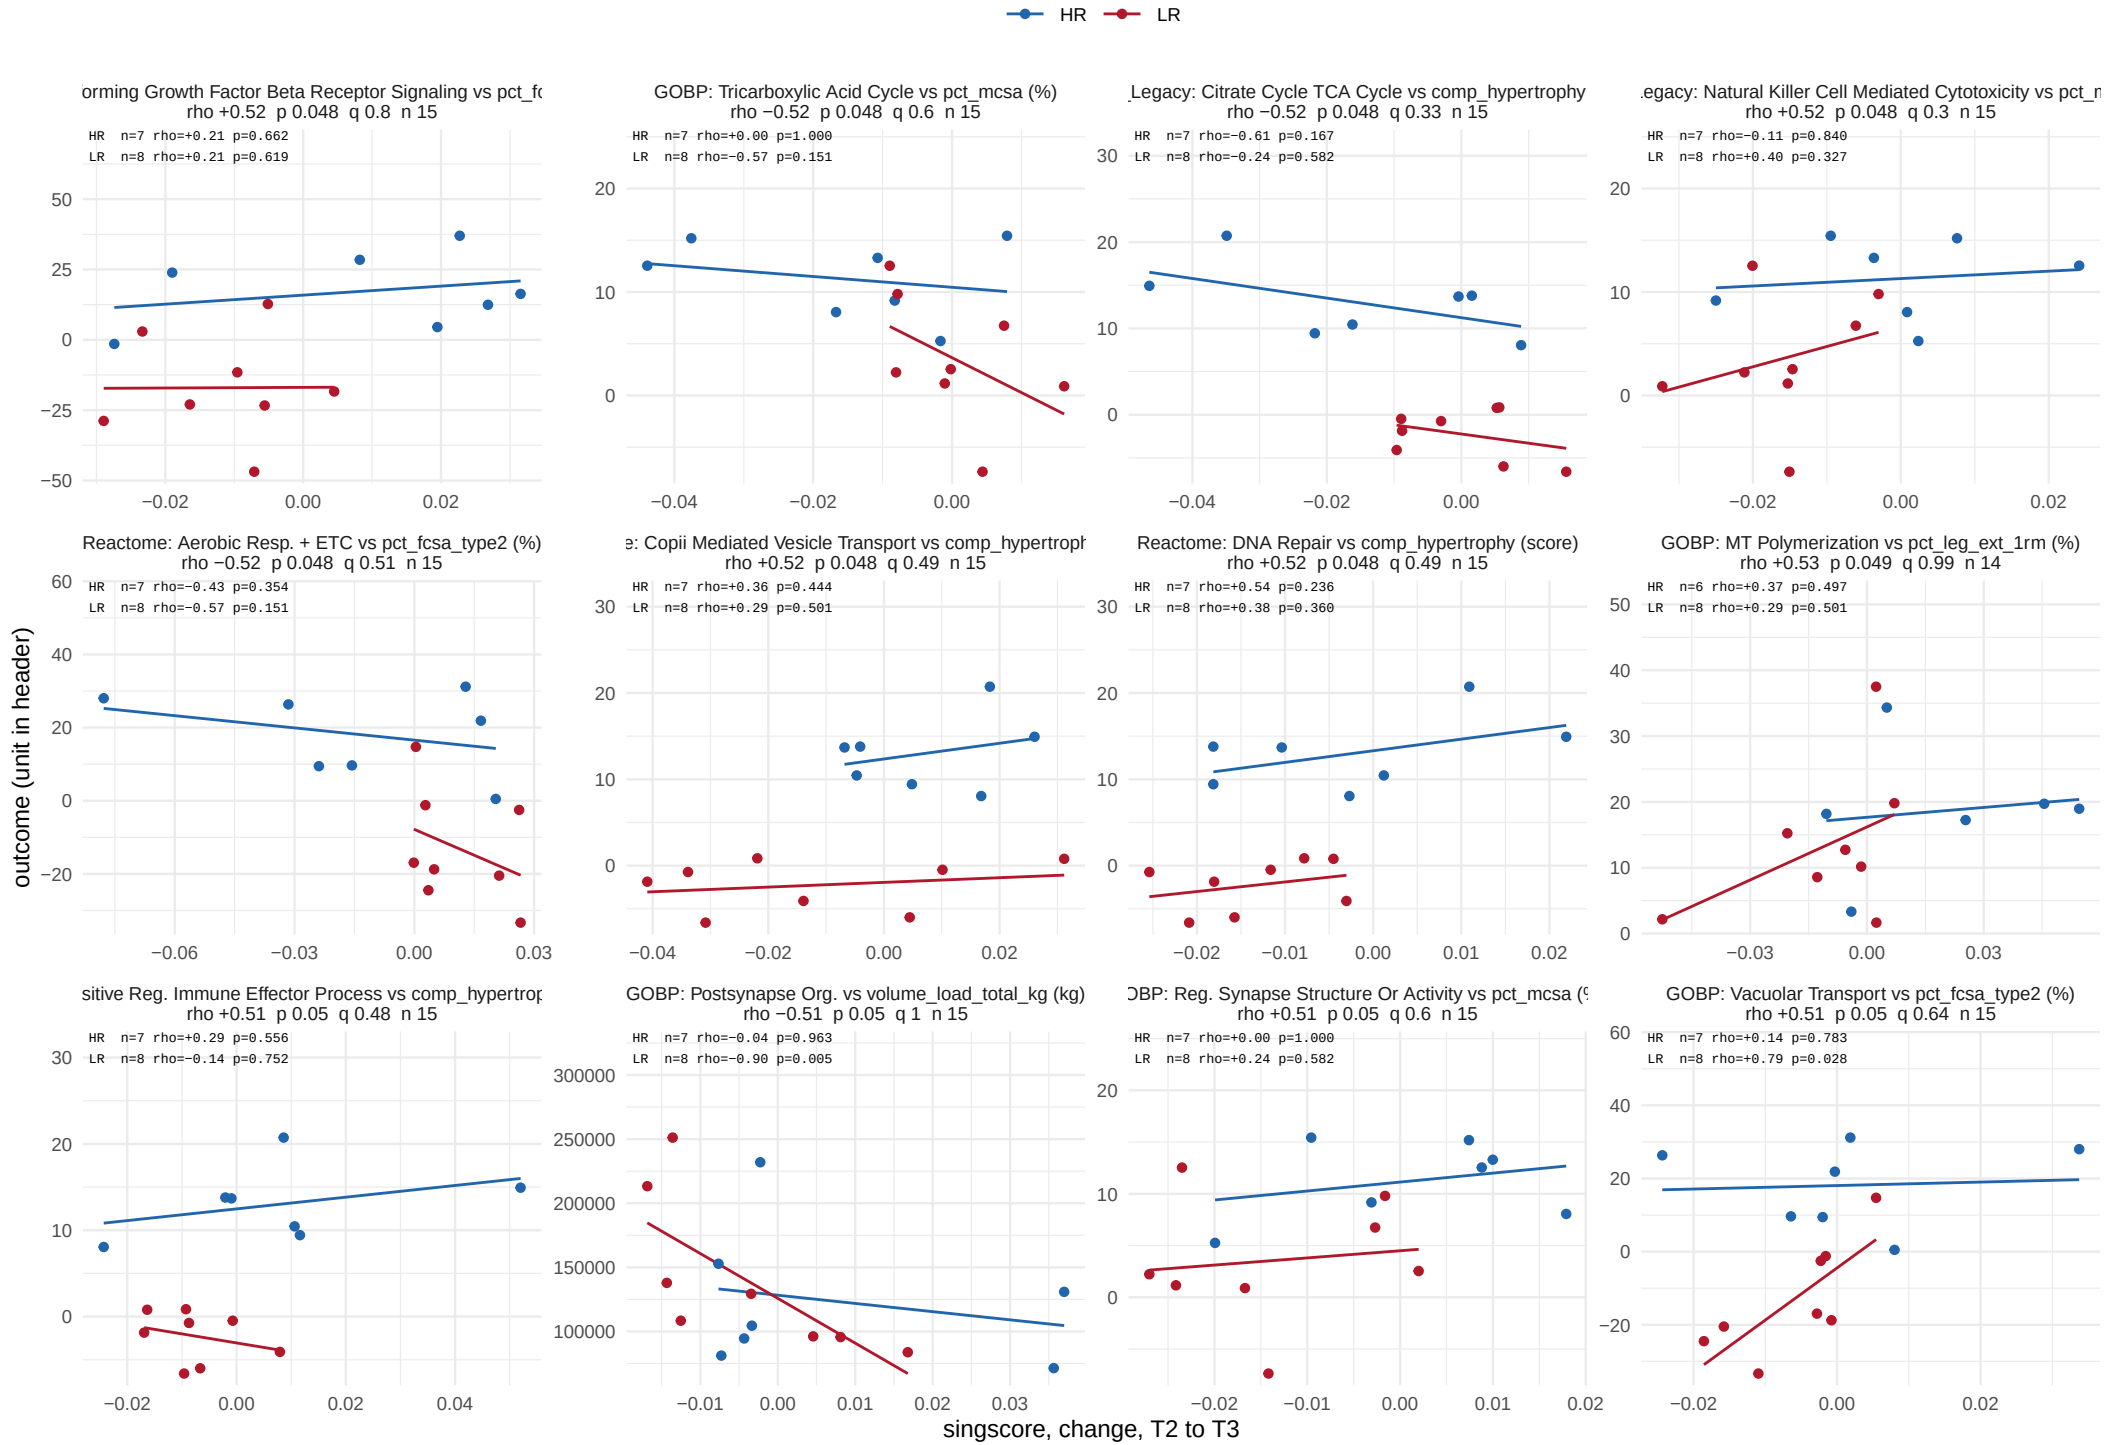


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

# Change score, acute window


573 of 11024 feature−outcome pairs at p < 0.05, 4 at BH < 0.05. Page 48 of 48.

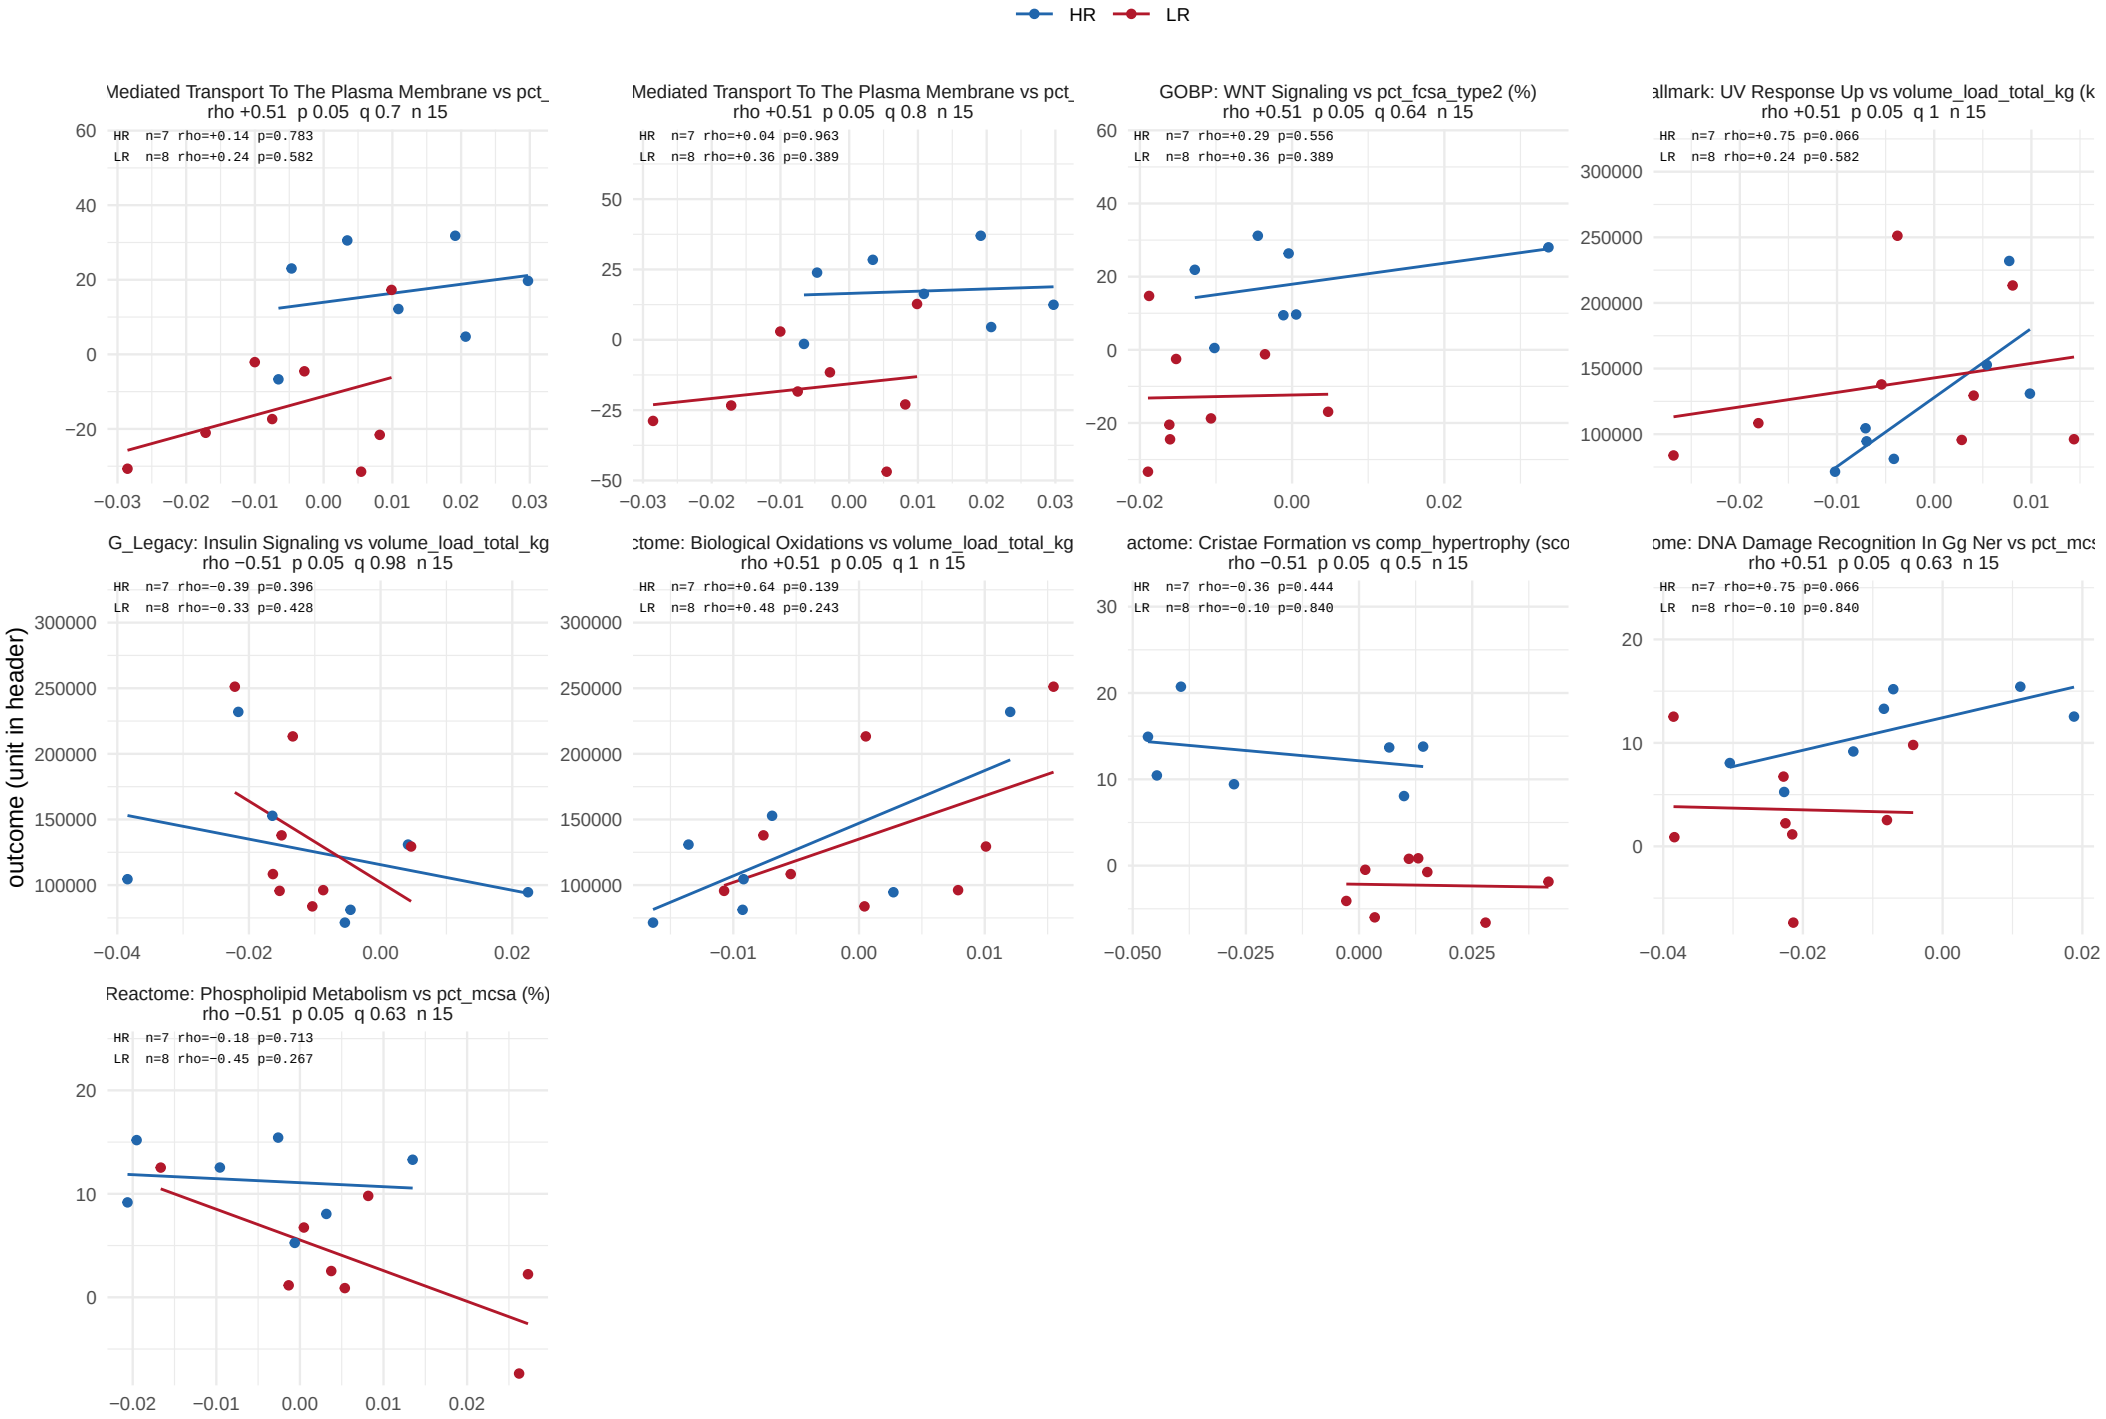


One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome and collection, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

## Arm difference, training window


506 of 11024 feature−outcome pairs at p < 0.05, 18 at BH < 0.05. Page 1 of 43.

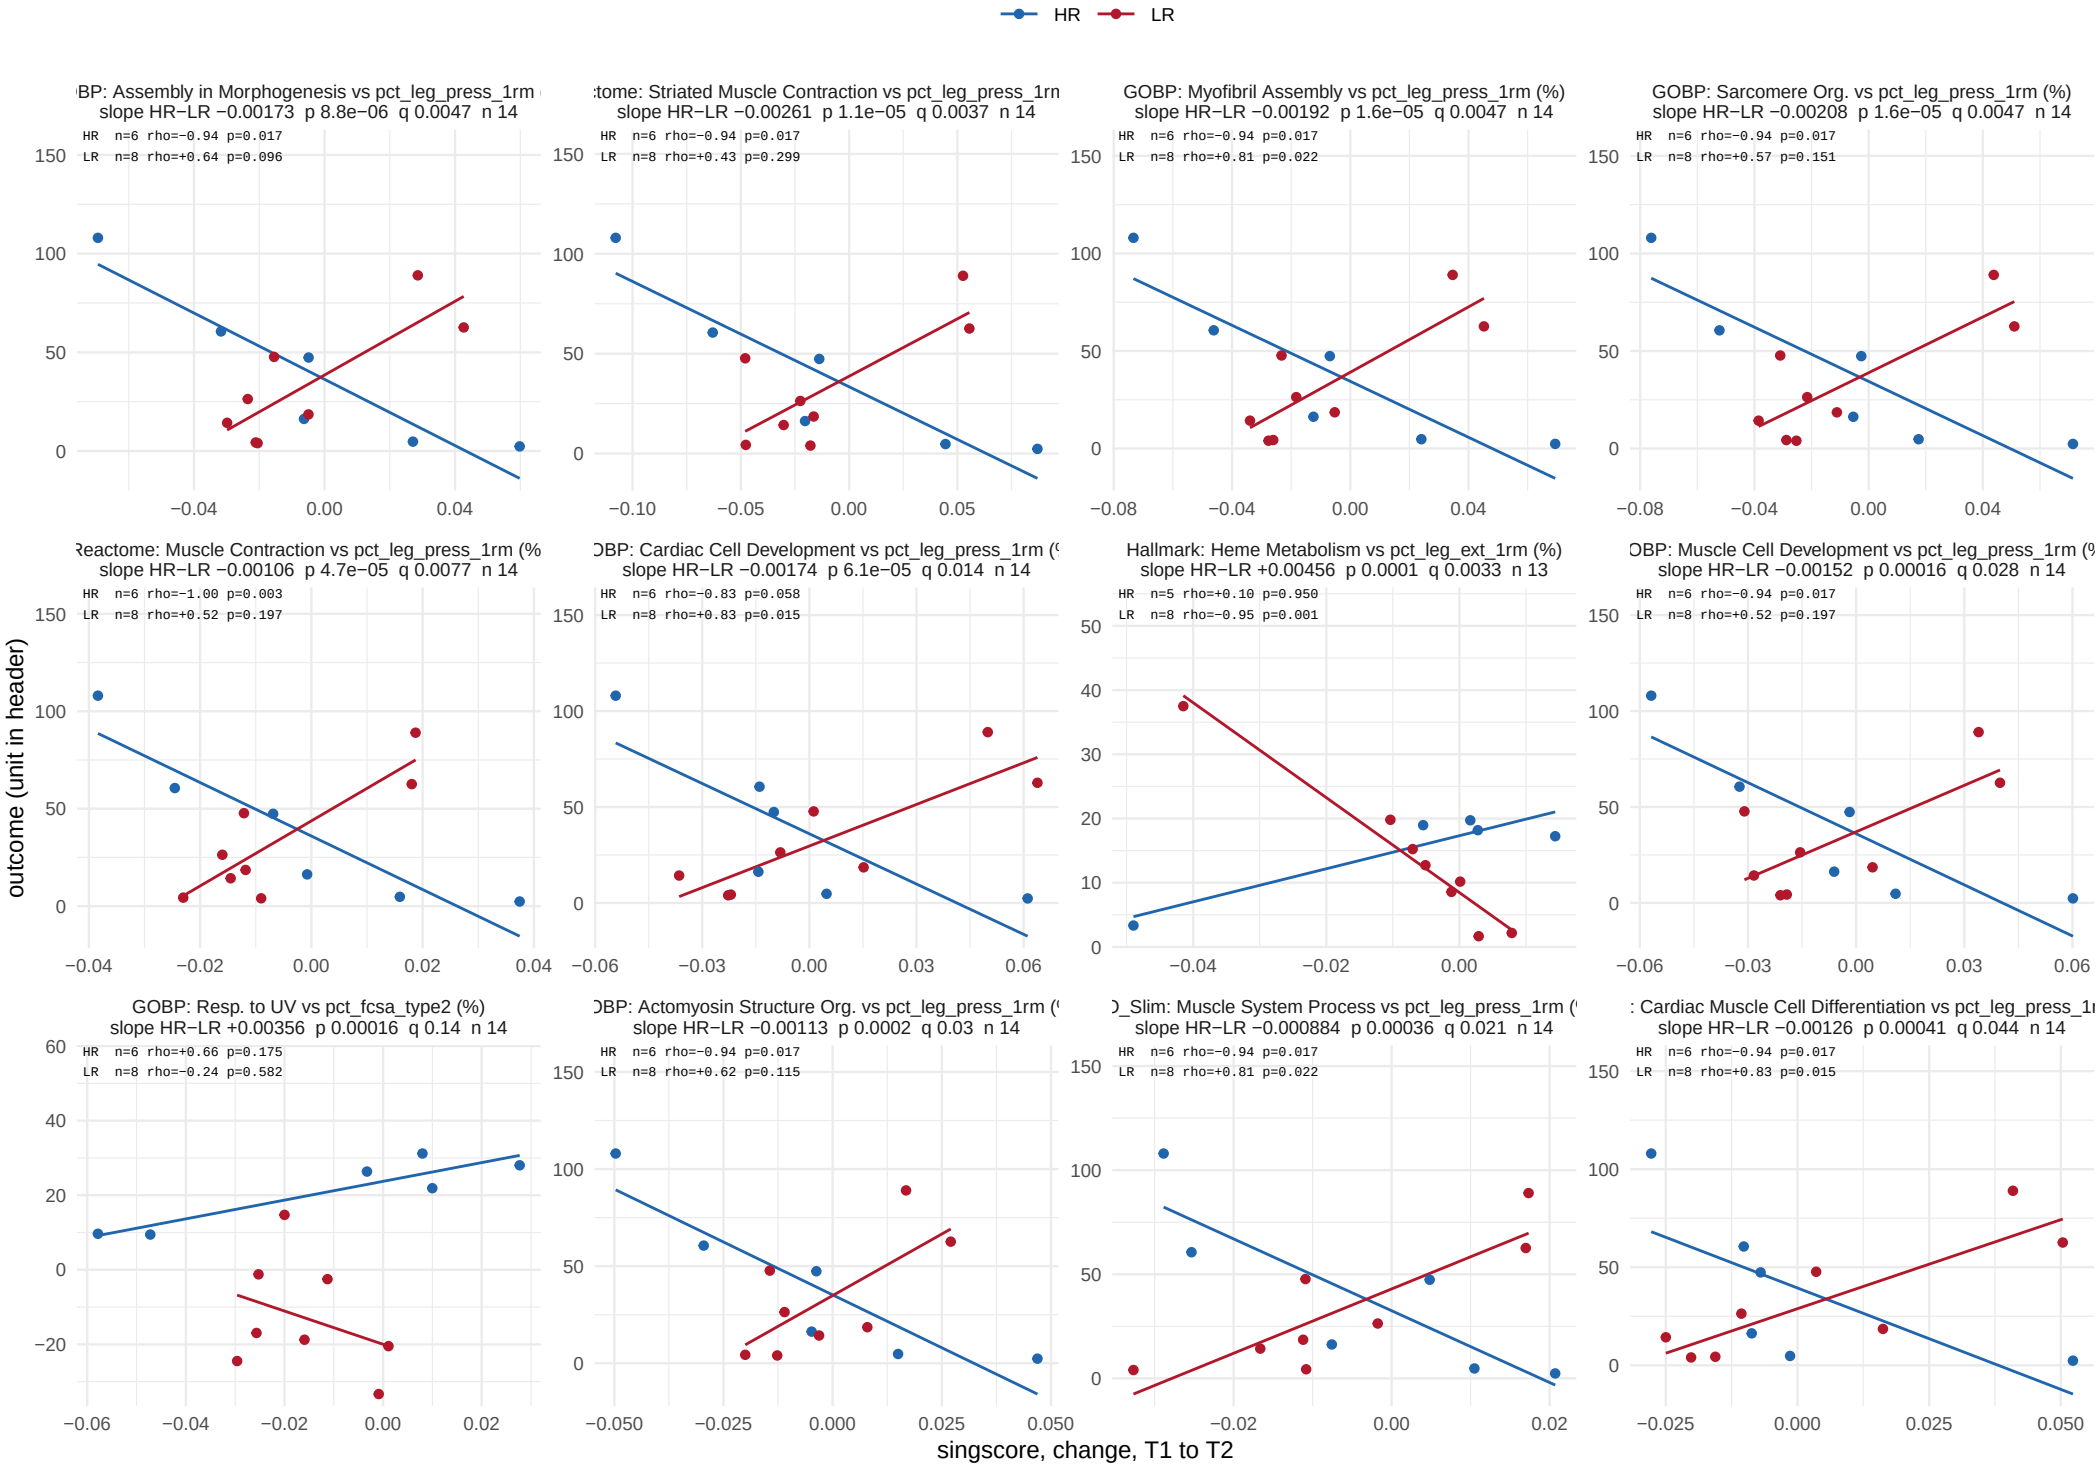


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, training window


506 of 11024 feature−outcome pairs at p < 0.05, 18 at BH < 0.05. Page 2 of 43.

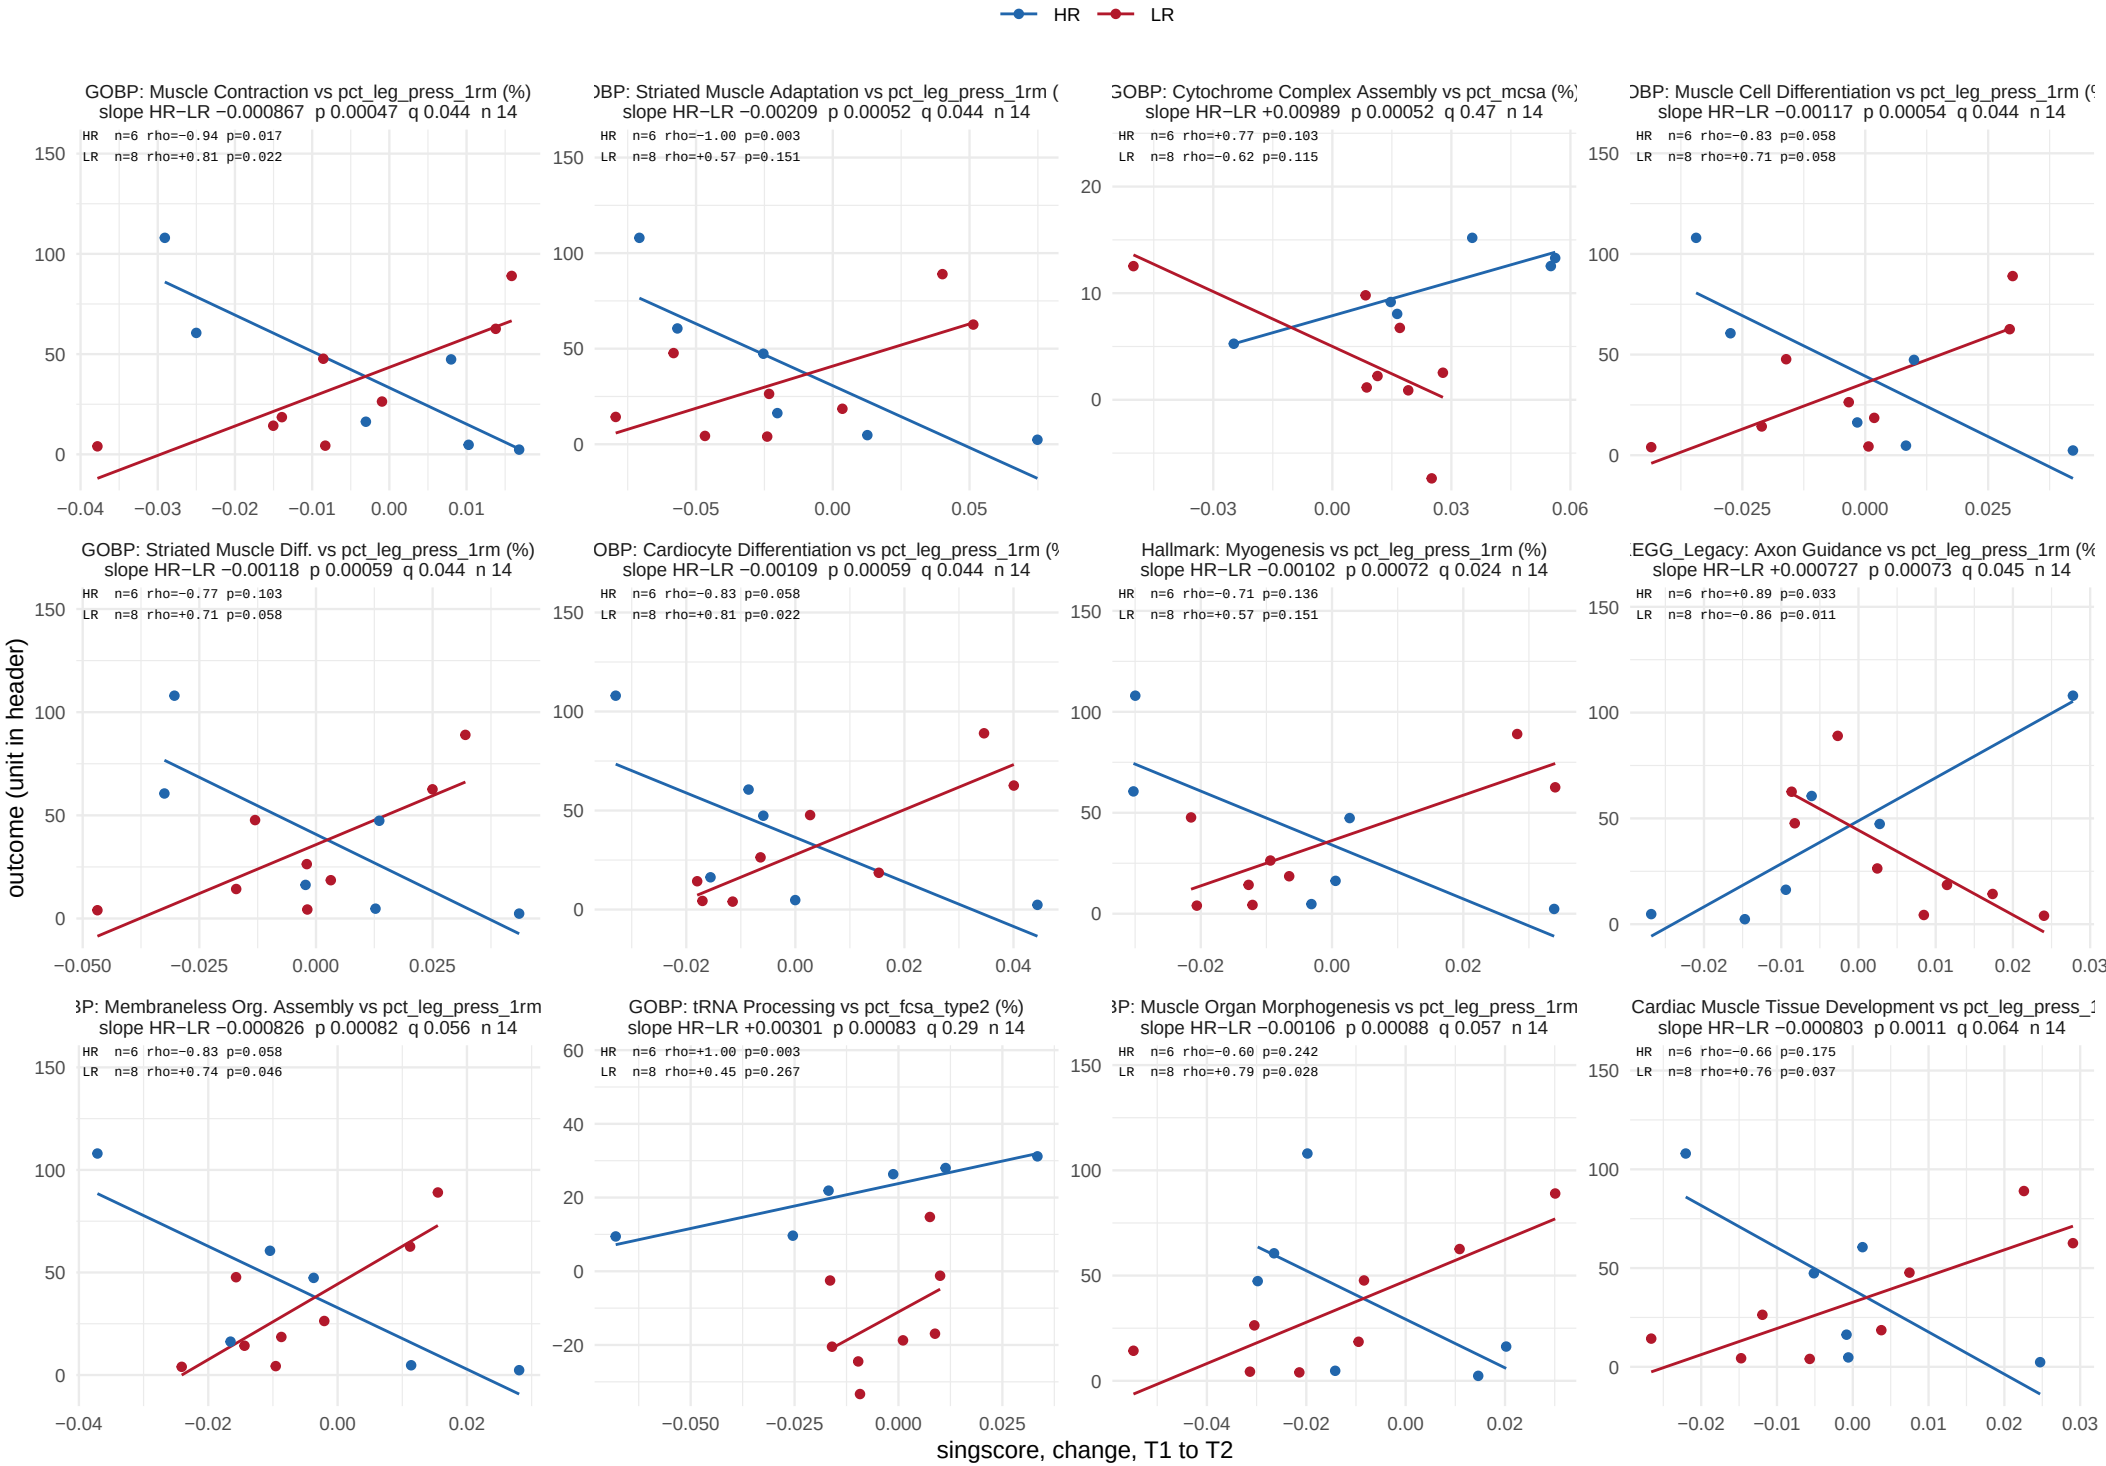


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, training window


506 of 11024 feature−outcome pairs at p < 0.05, 18 at BH < 0.05. Page 3 of 43.

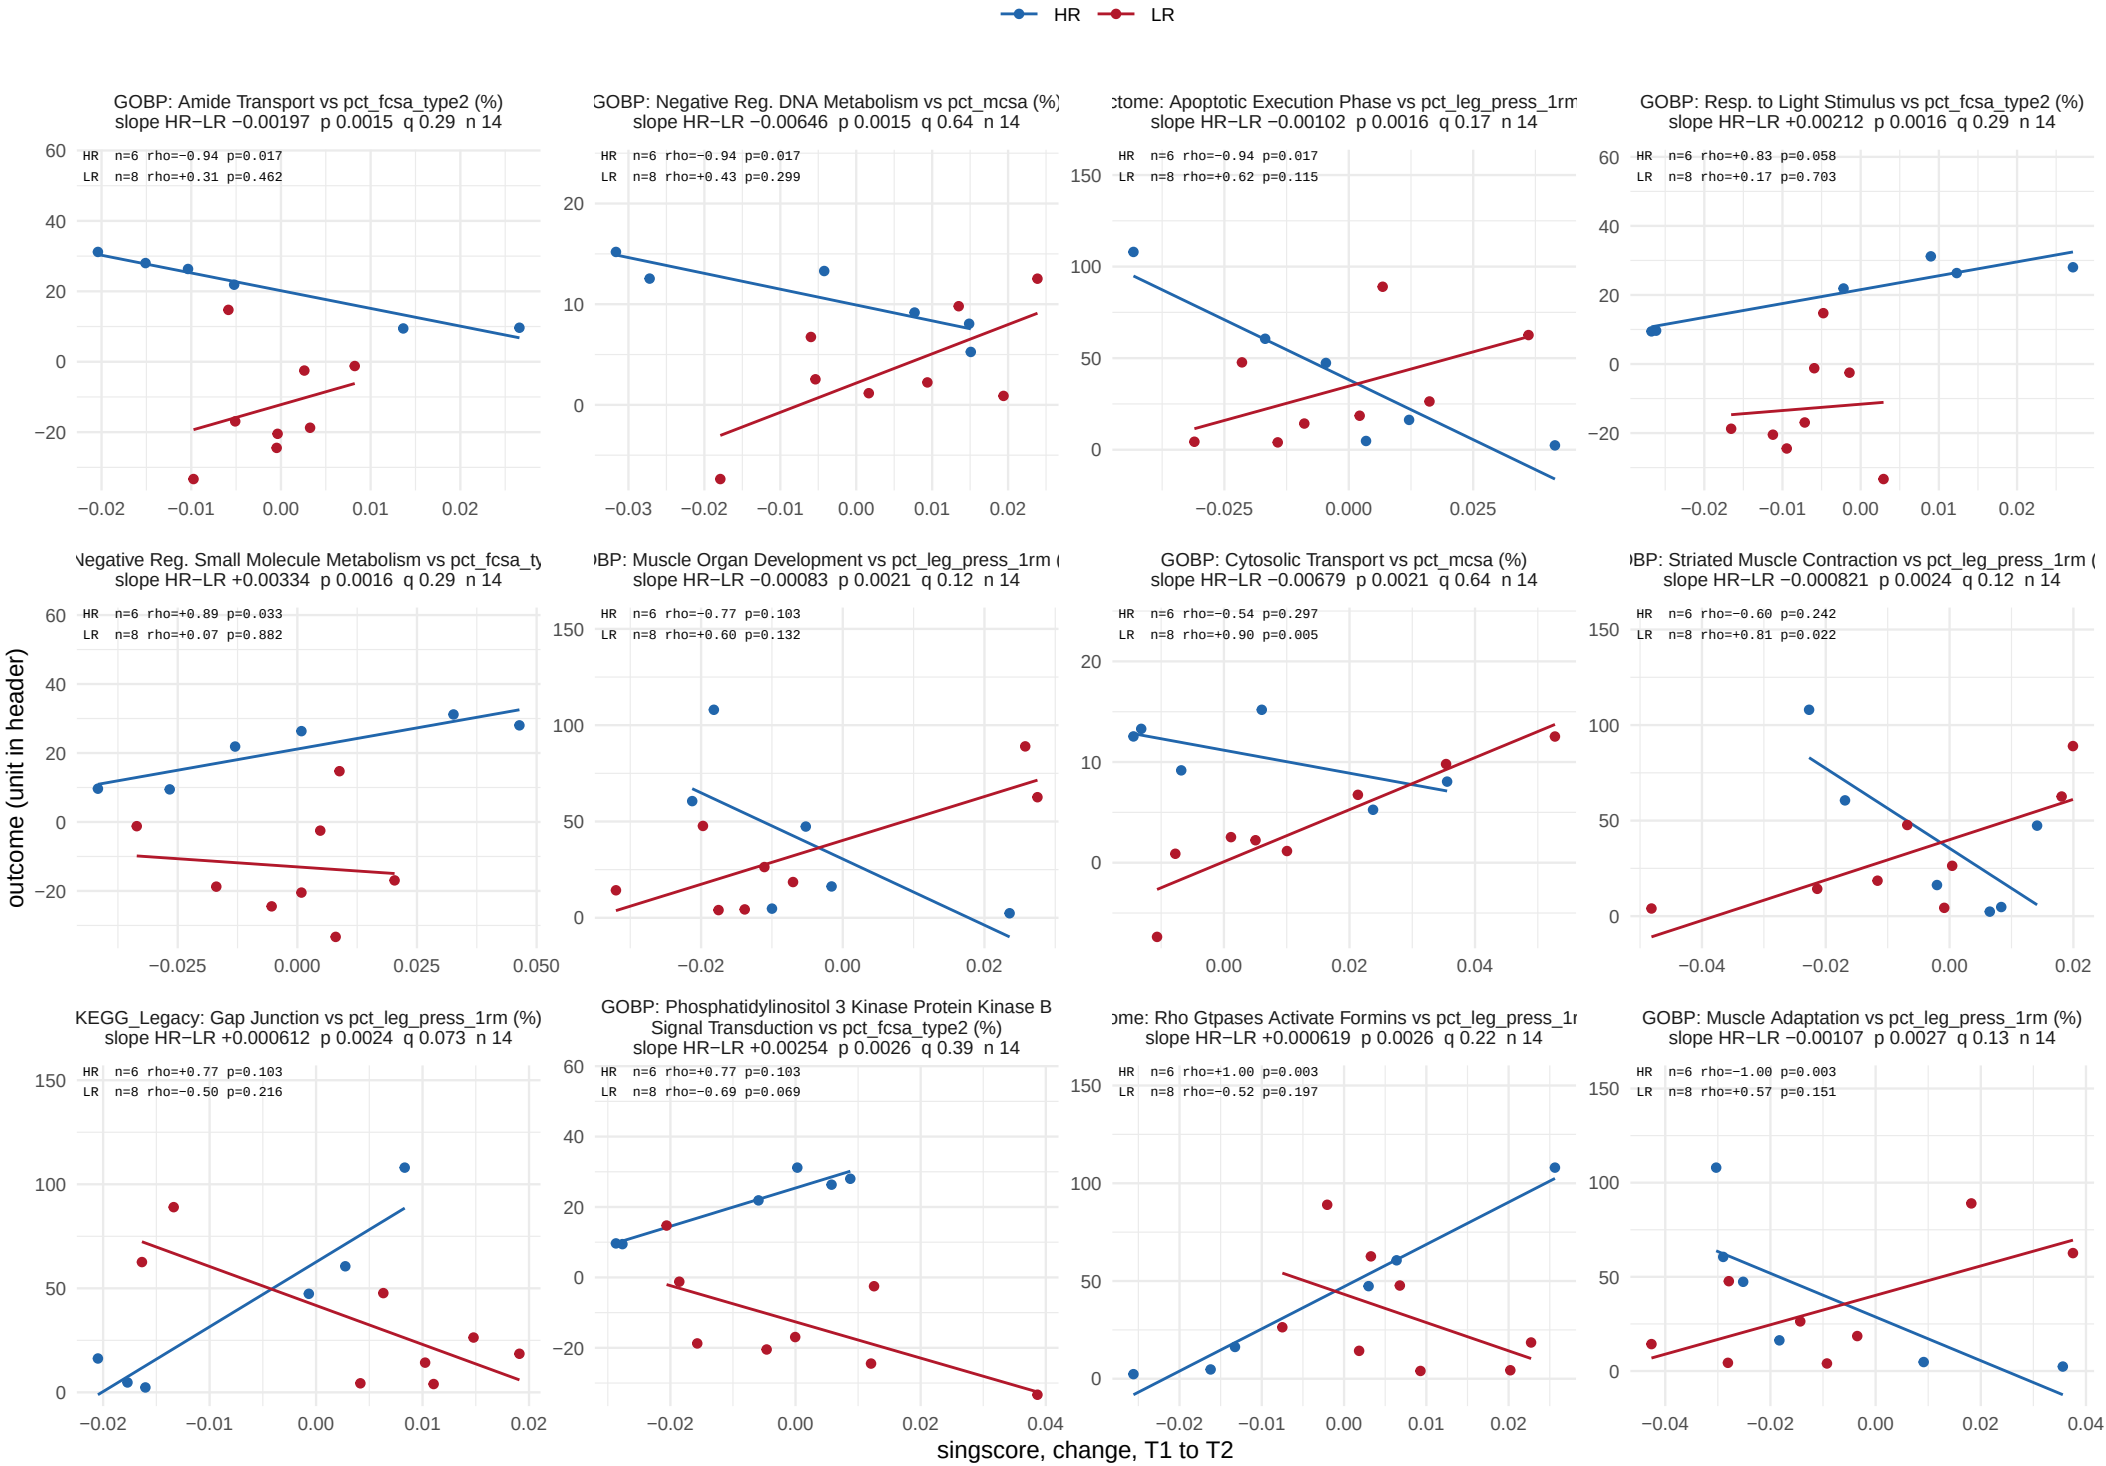


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, training window


506 of 11024 feature−outcome pairs at p < 0.05, 18 at BH < 0.05. Page 4 of 43.

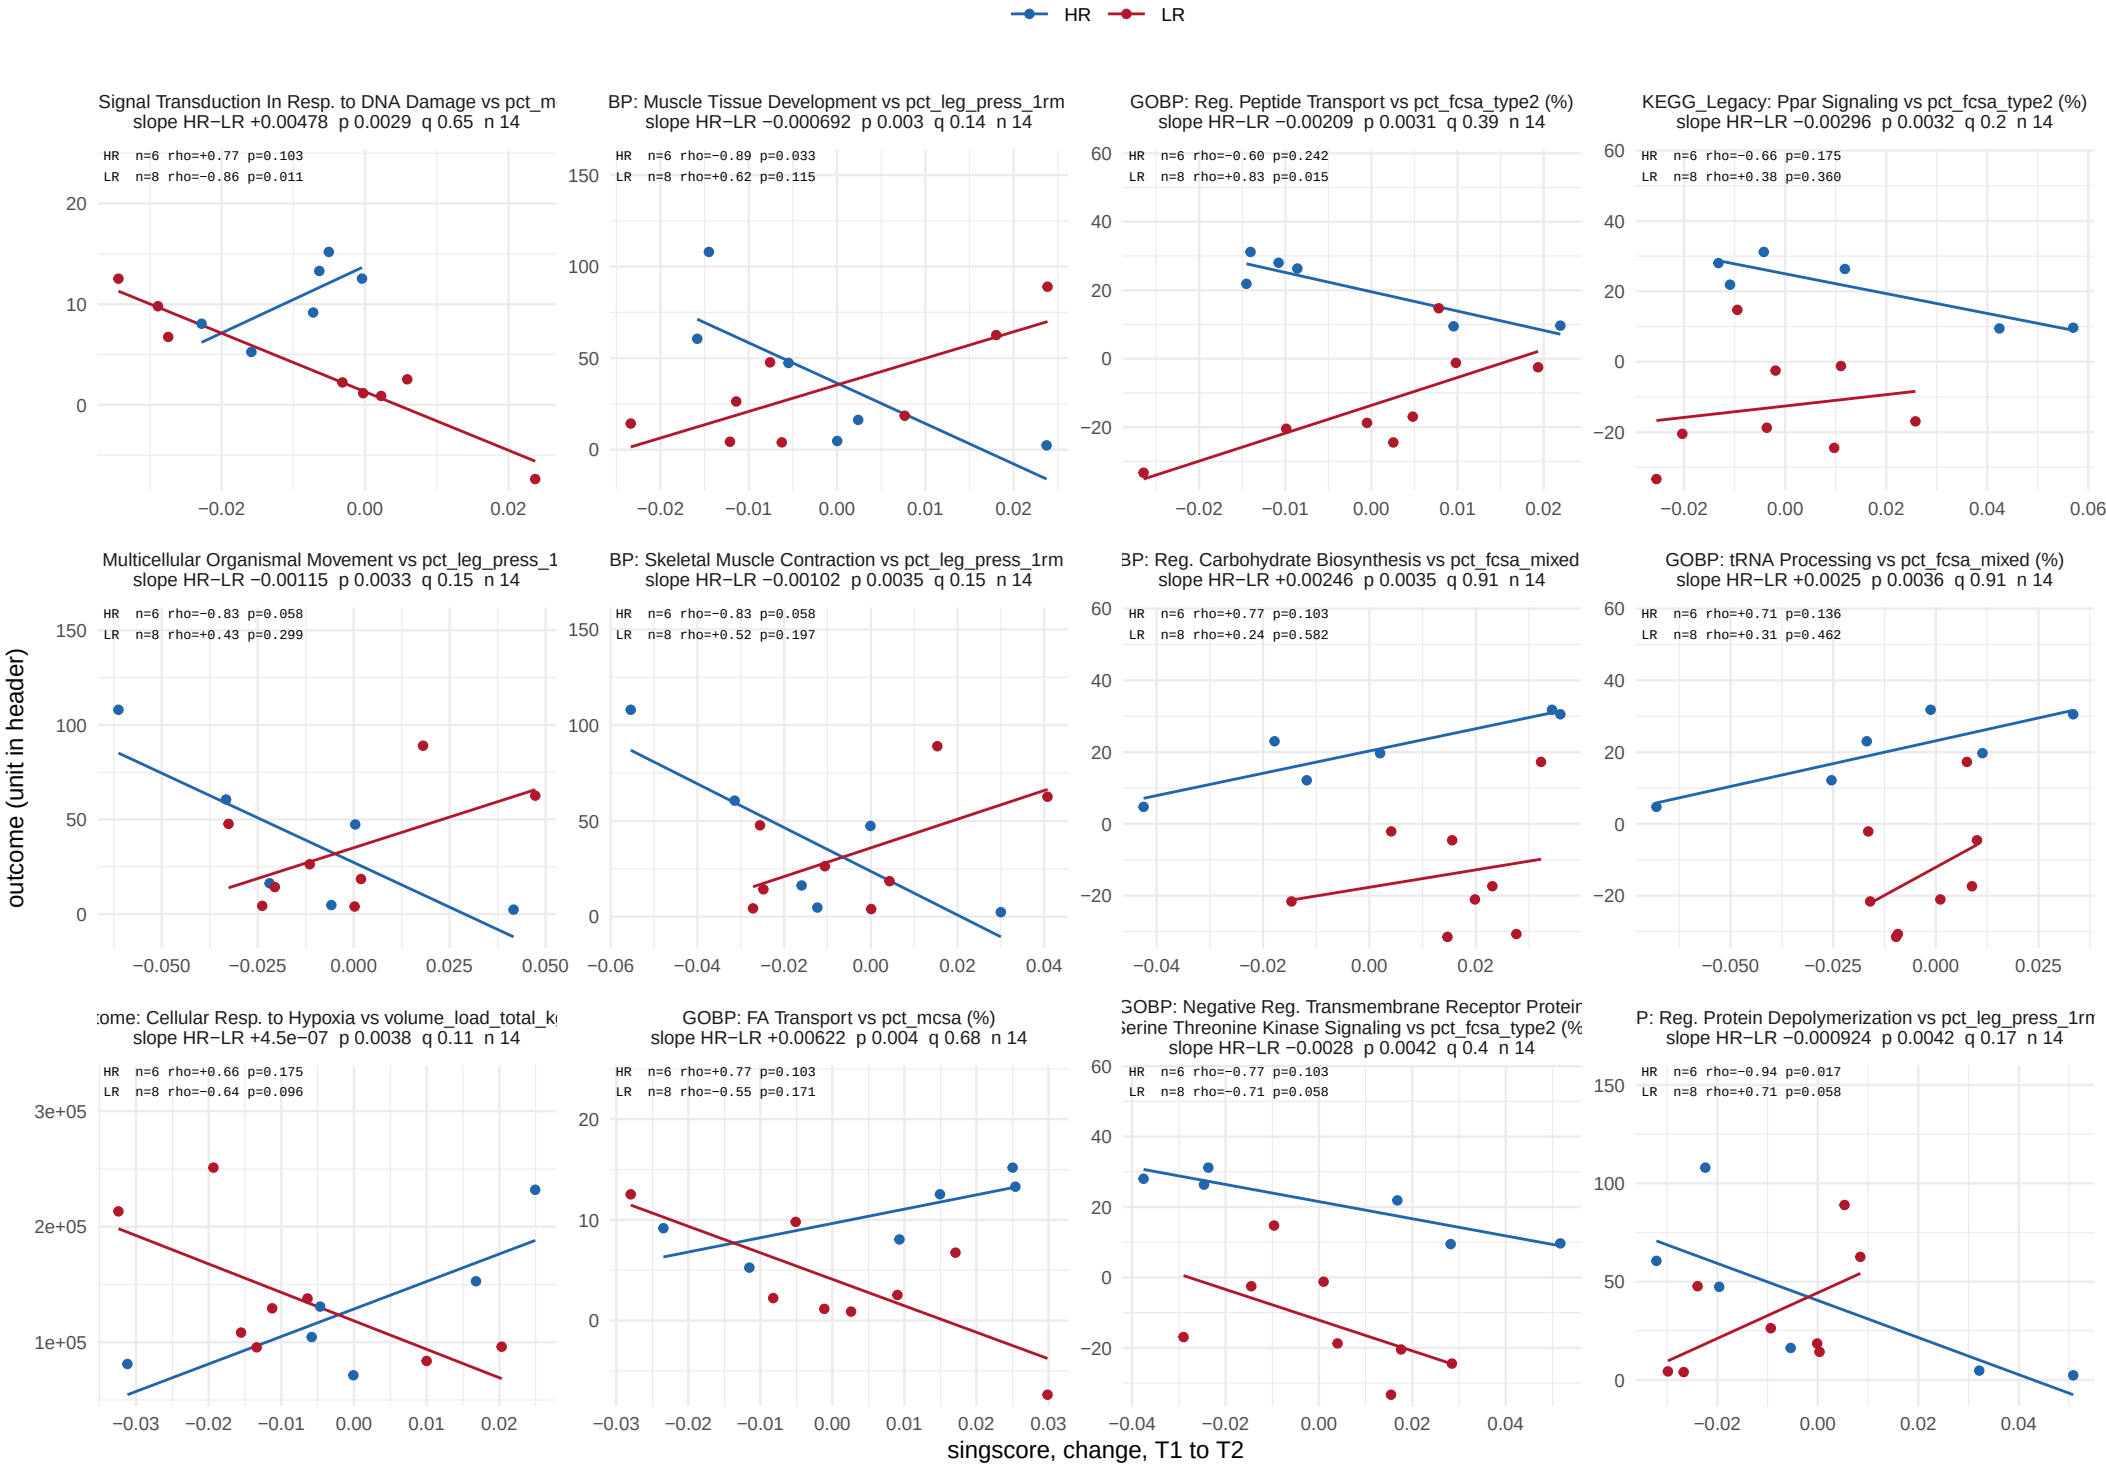


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, training window


506 of 11024 feature−outcome pairs at p < 0.05, 18 at BH < 0.05. Page 5 of 43.

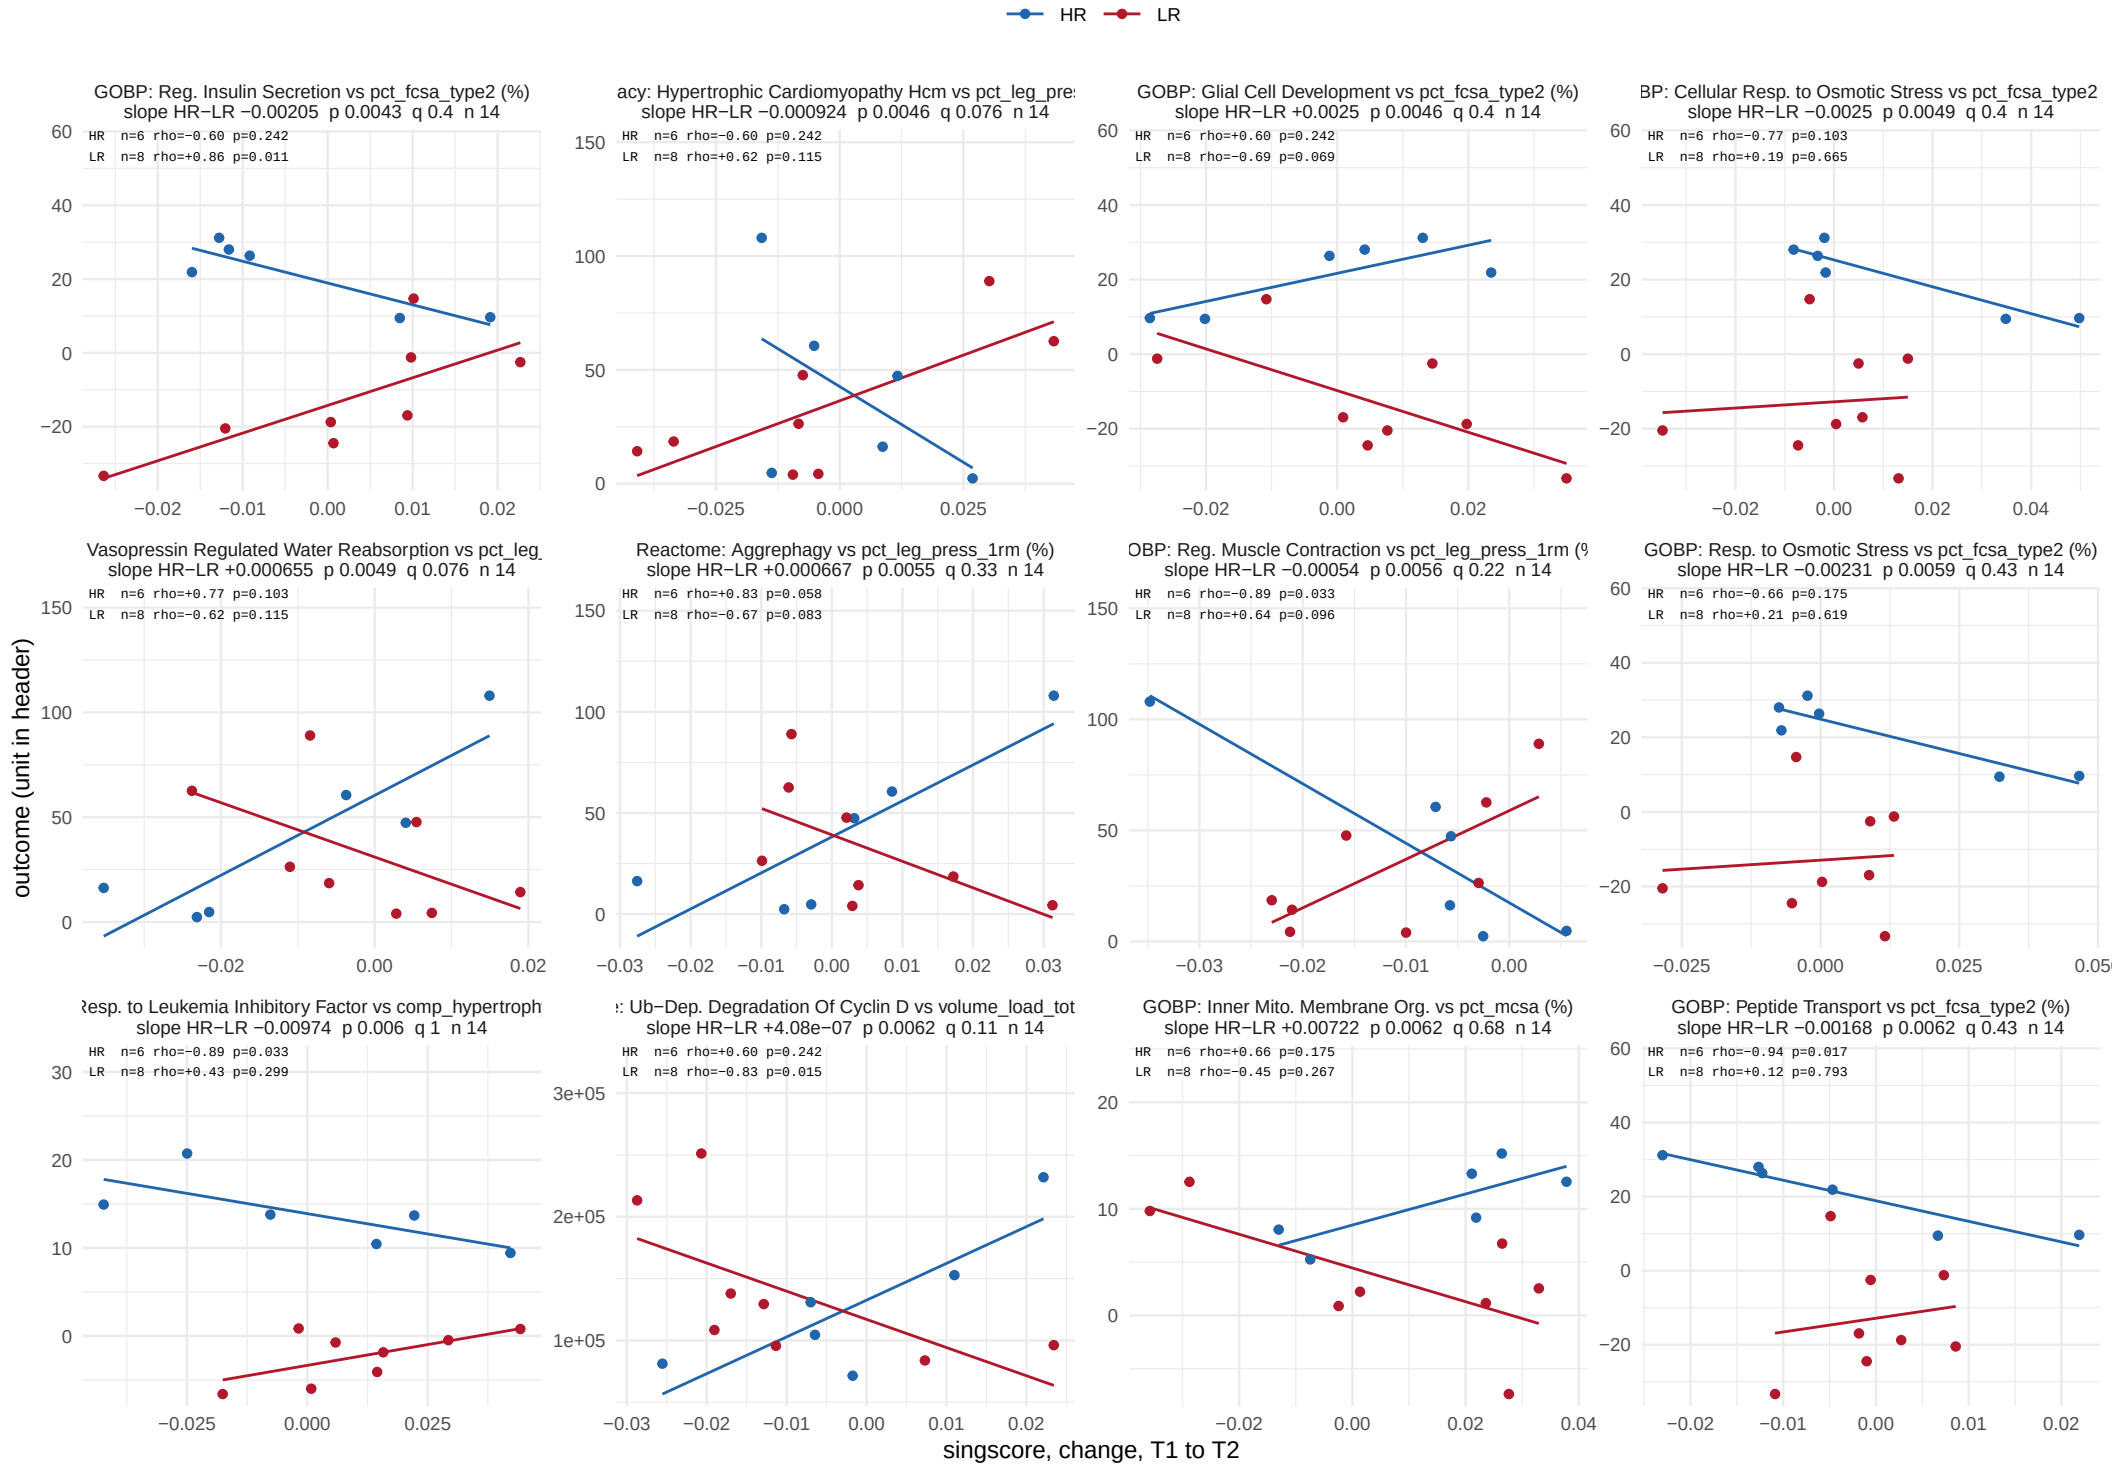


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, training window


506 of 11024 feature−outcome pairs at p < 0.05, 18 at BH < 0.05. Page 6 of 43.

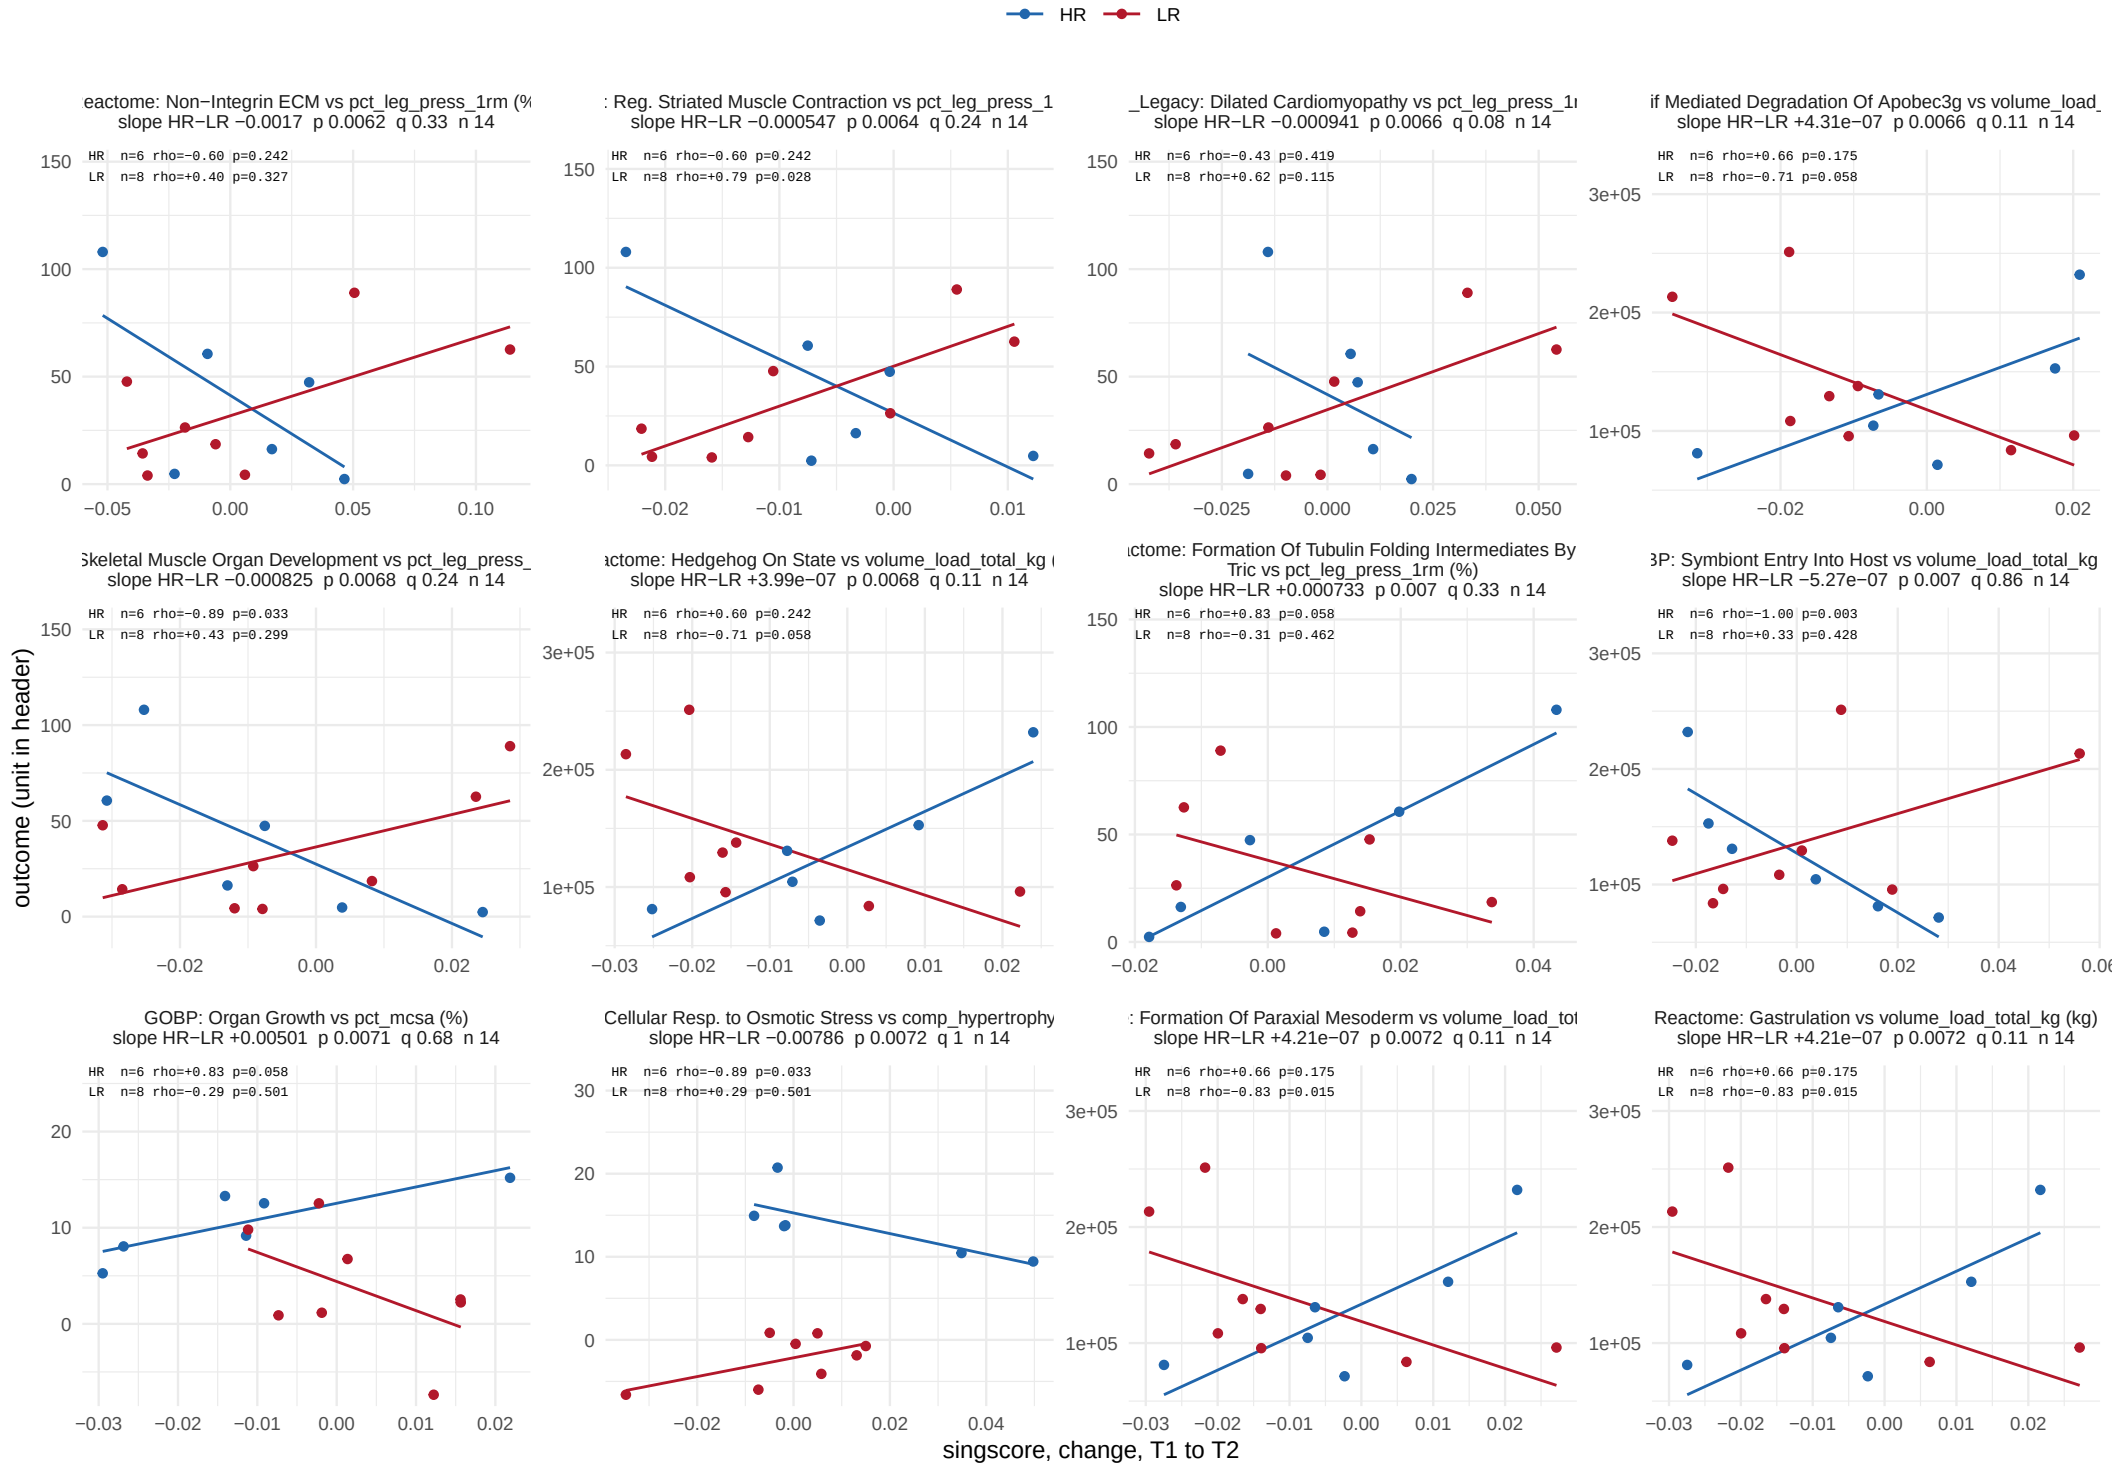


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, training window


506 of 11024 feature−outcome pairs at p < 0.05, 18 at BH < 0.05. Page 7 of 43.

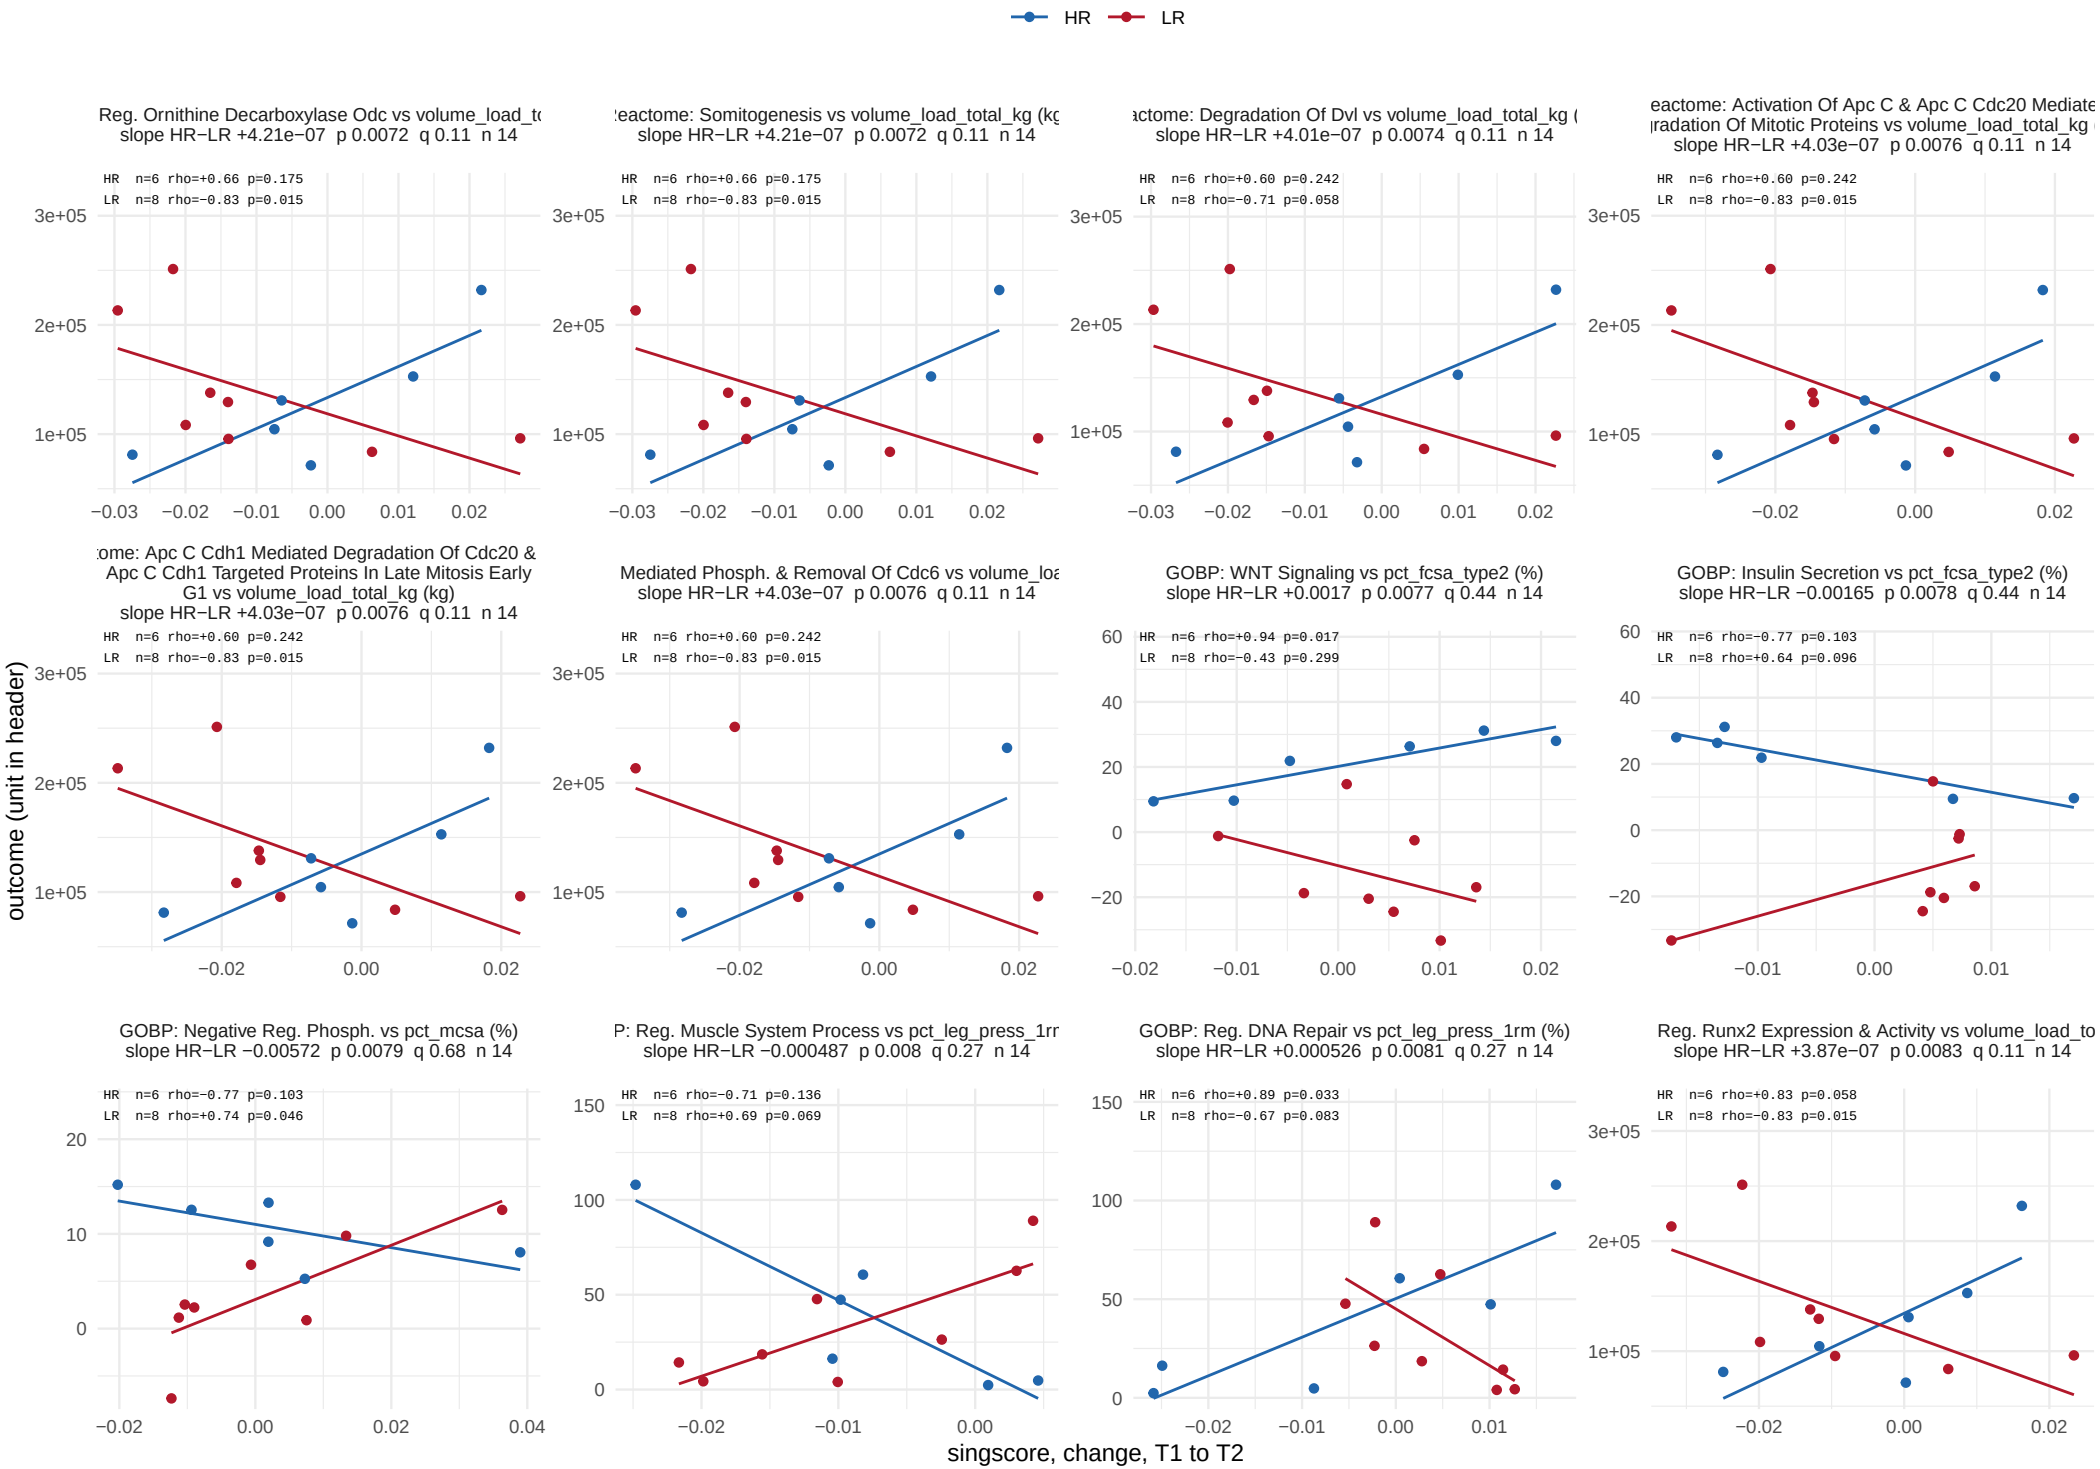


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, training window


506 of 11024 feature−outcome pairs at p < 0.05, 18 at BH < 0.05. Page 8 of 43.

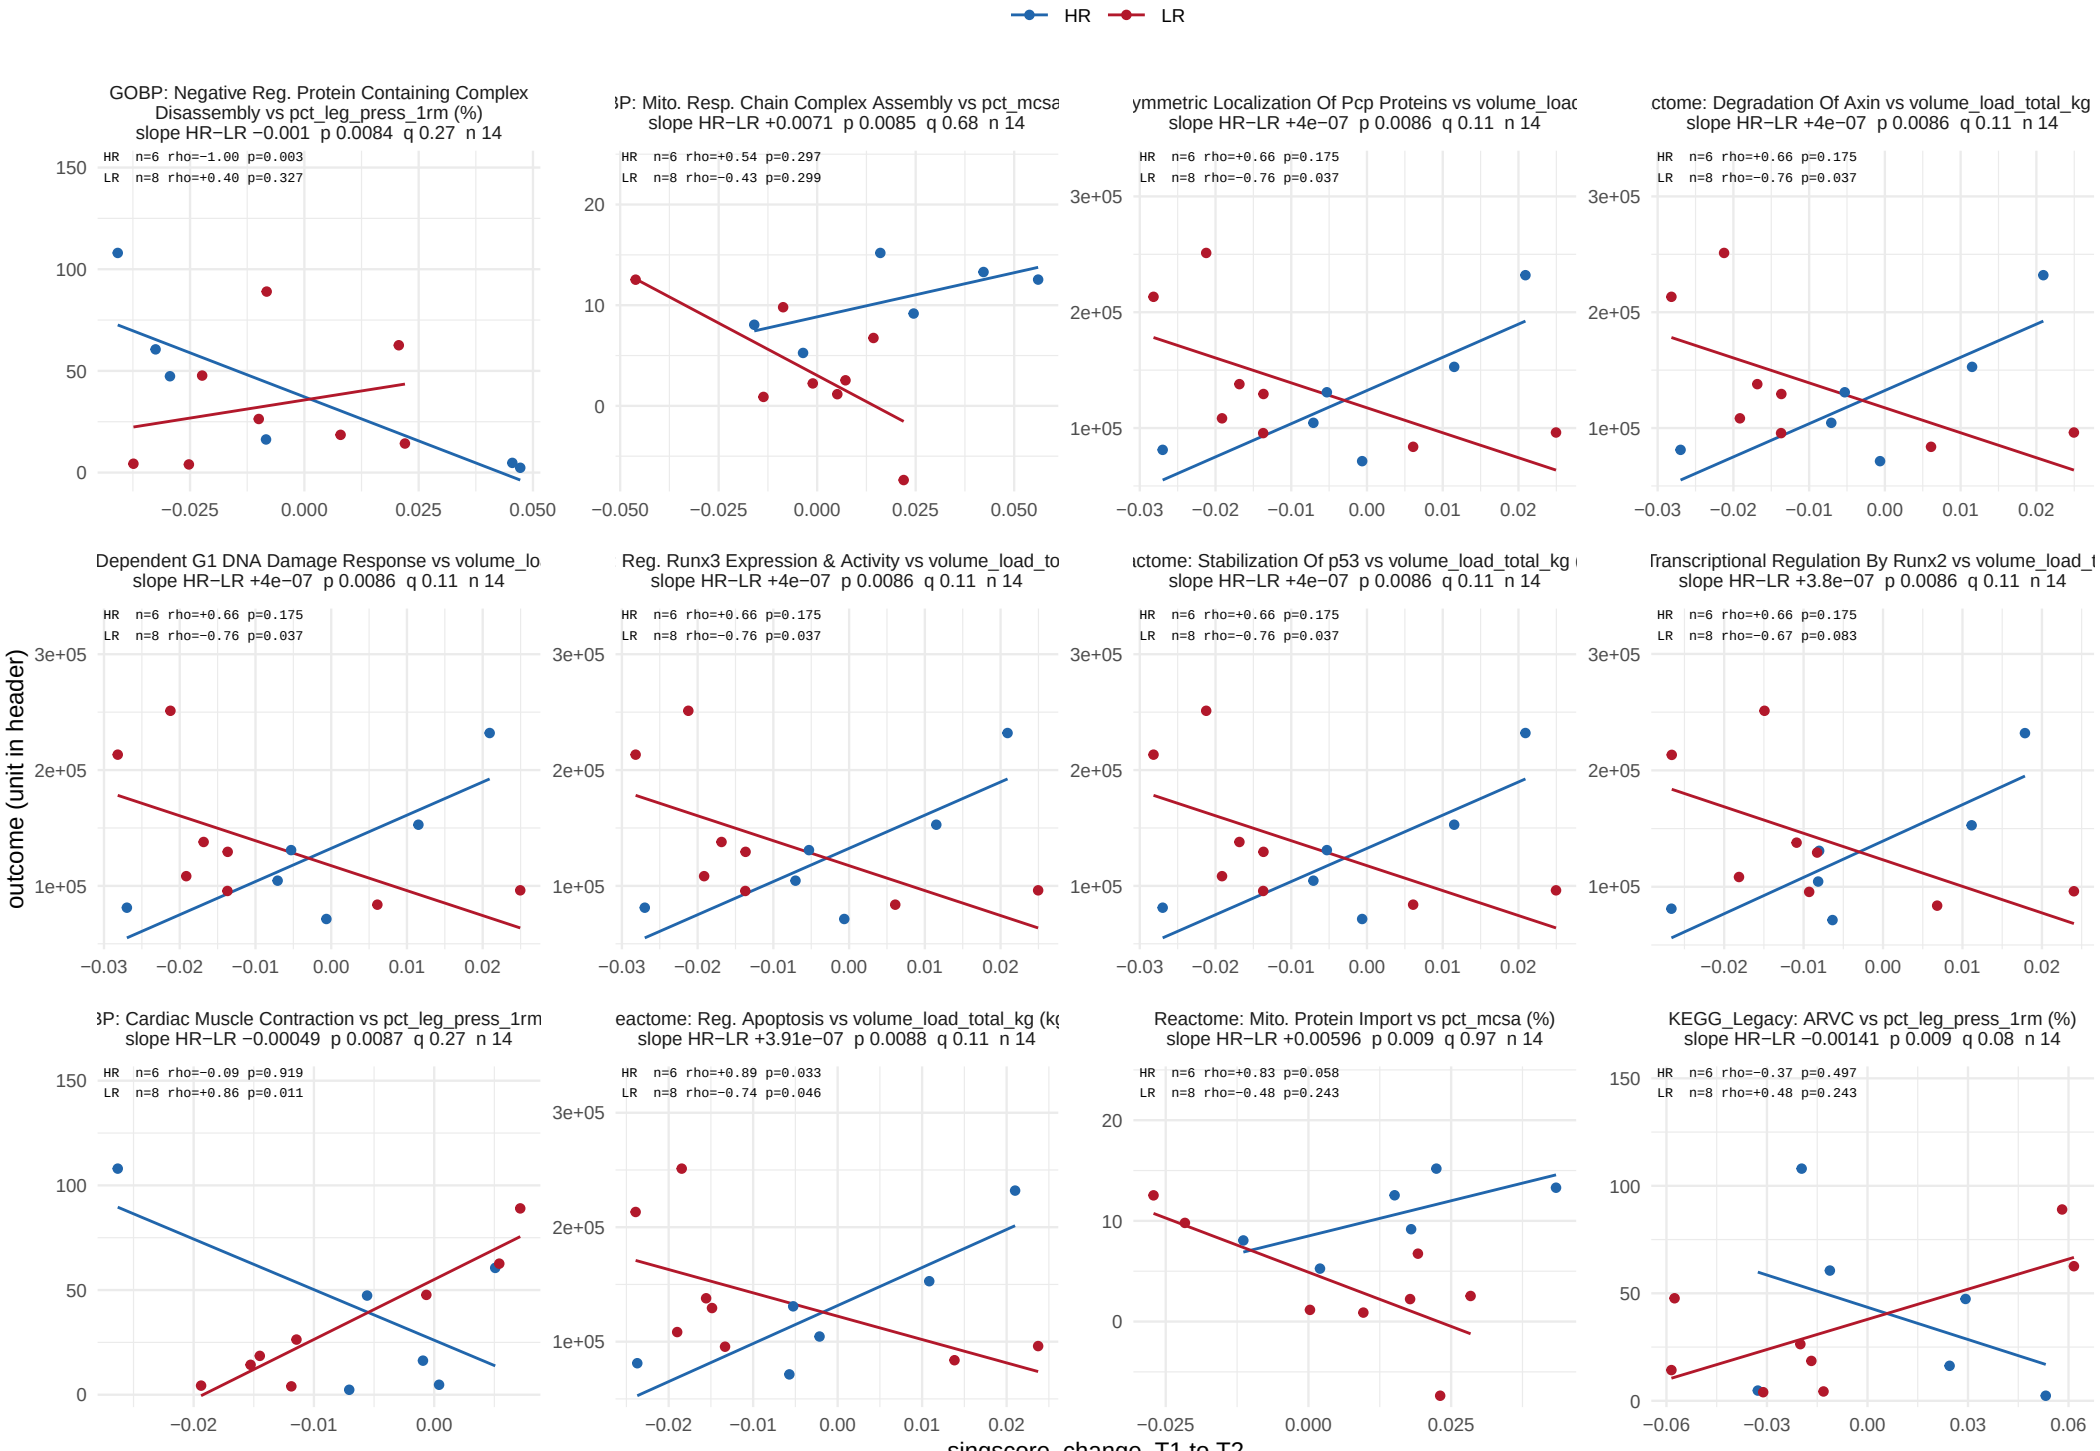


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

# Arm difference, training window


506 of 11024 feature−outcome pairs at p < 0.05, 18 at BH < 0.05. Page 9 of 43.

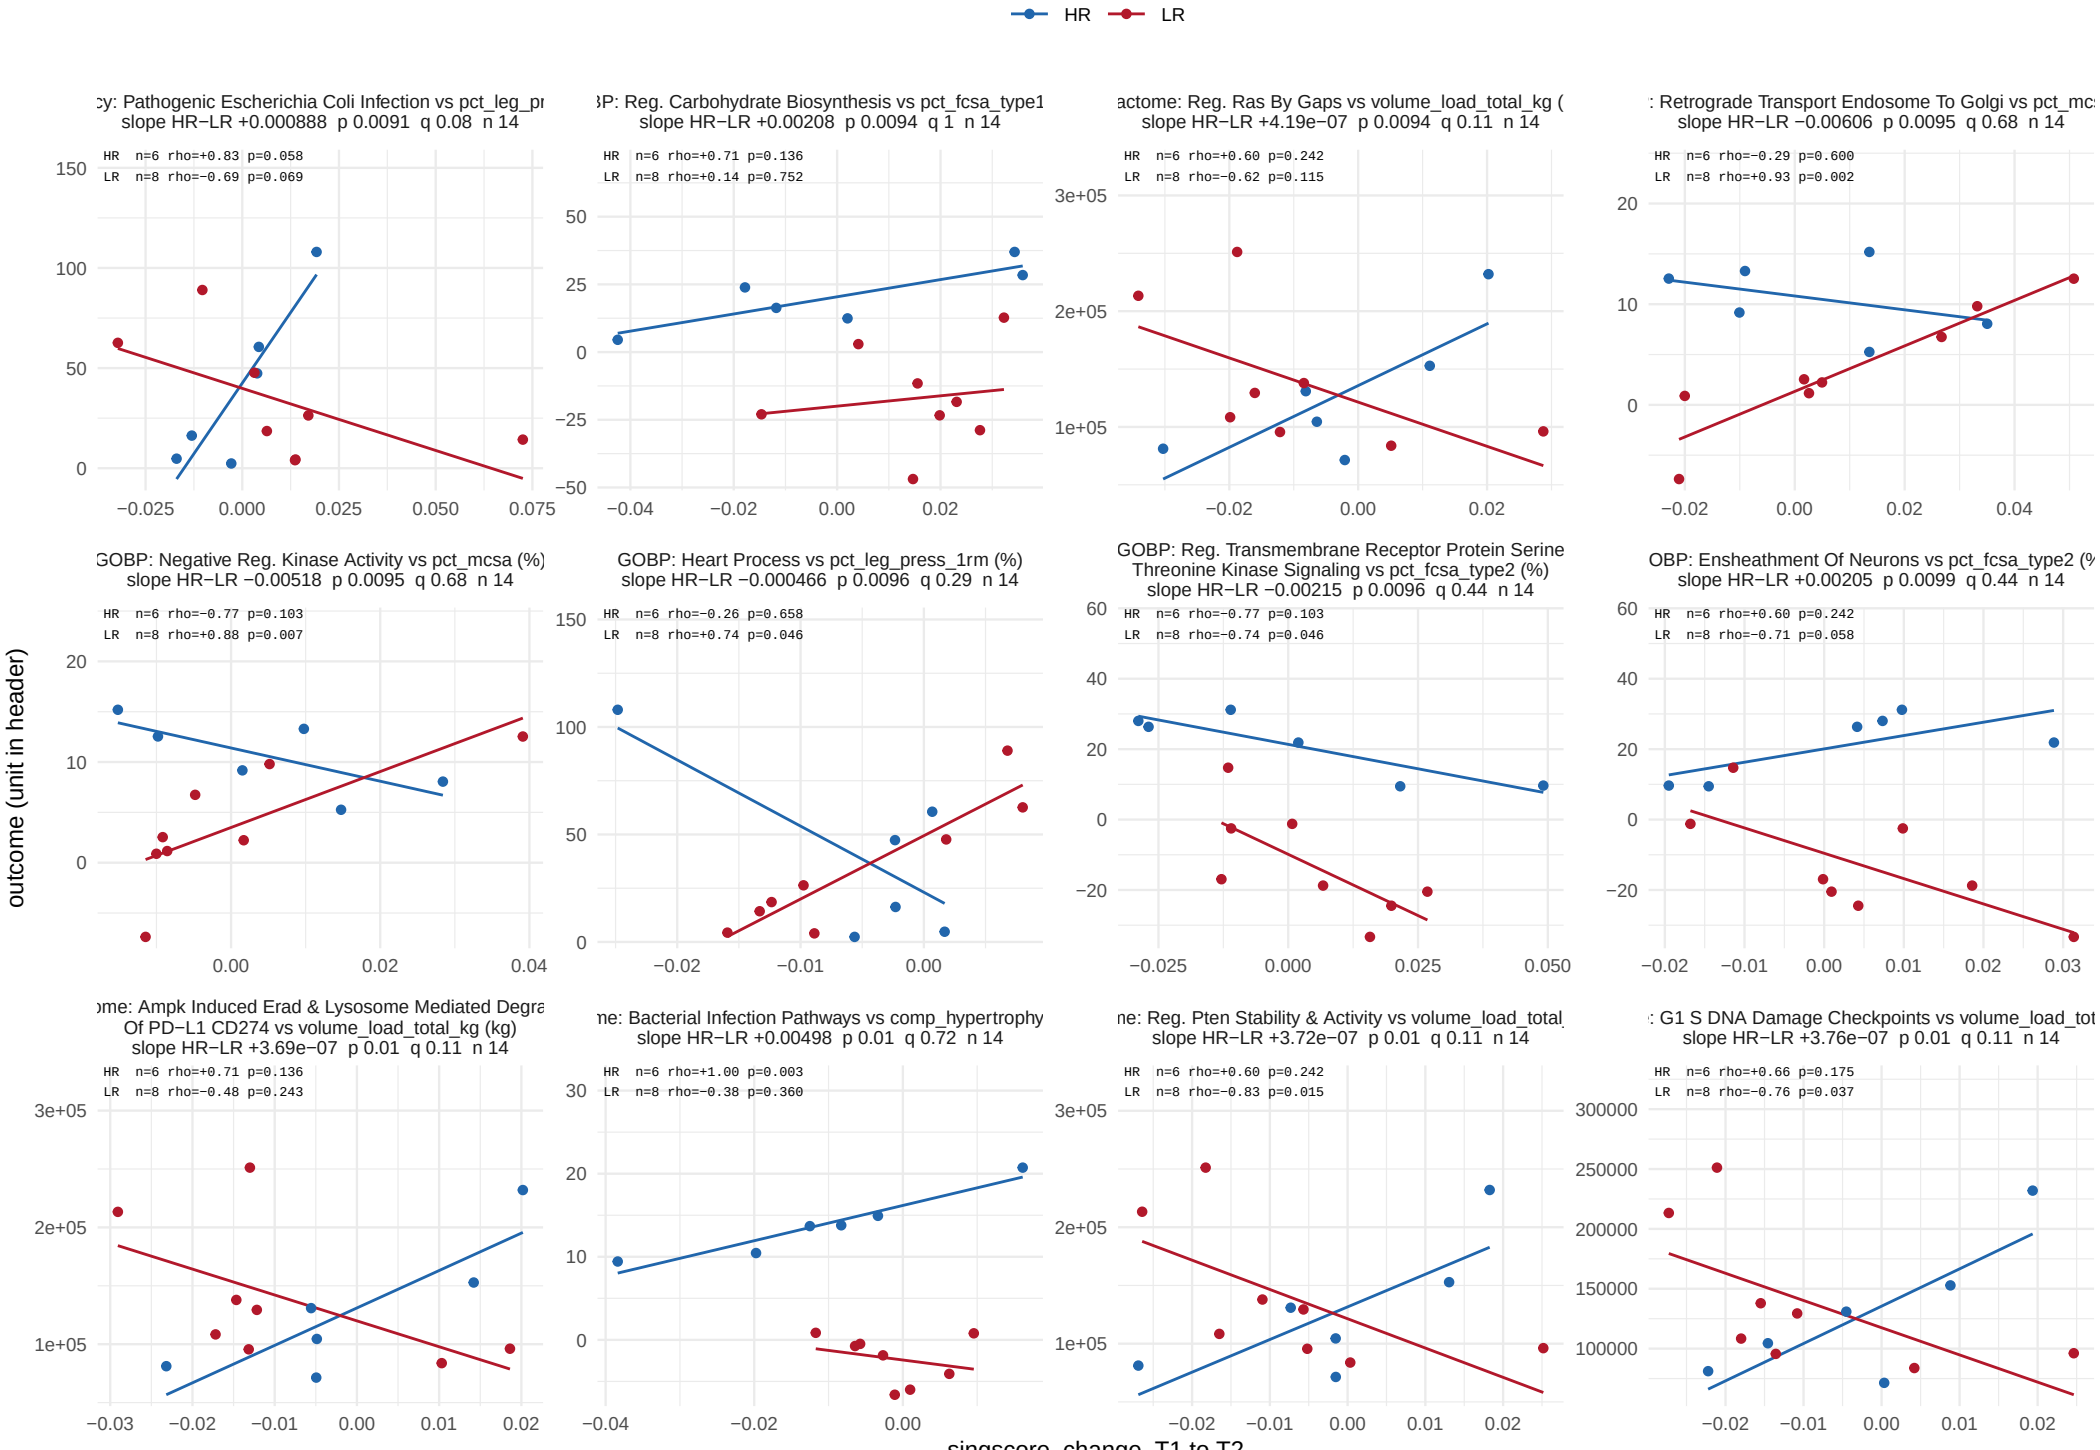


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, training window


506 of 11024 feature−outcome pairs at p < 0.05, 18 at BH < 0.05. Page 10 of 43.

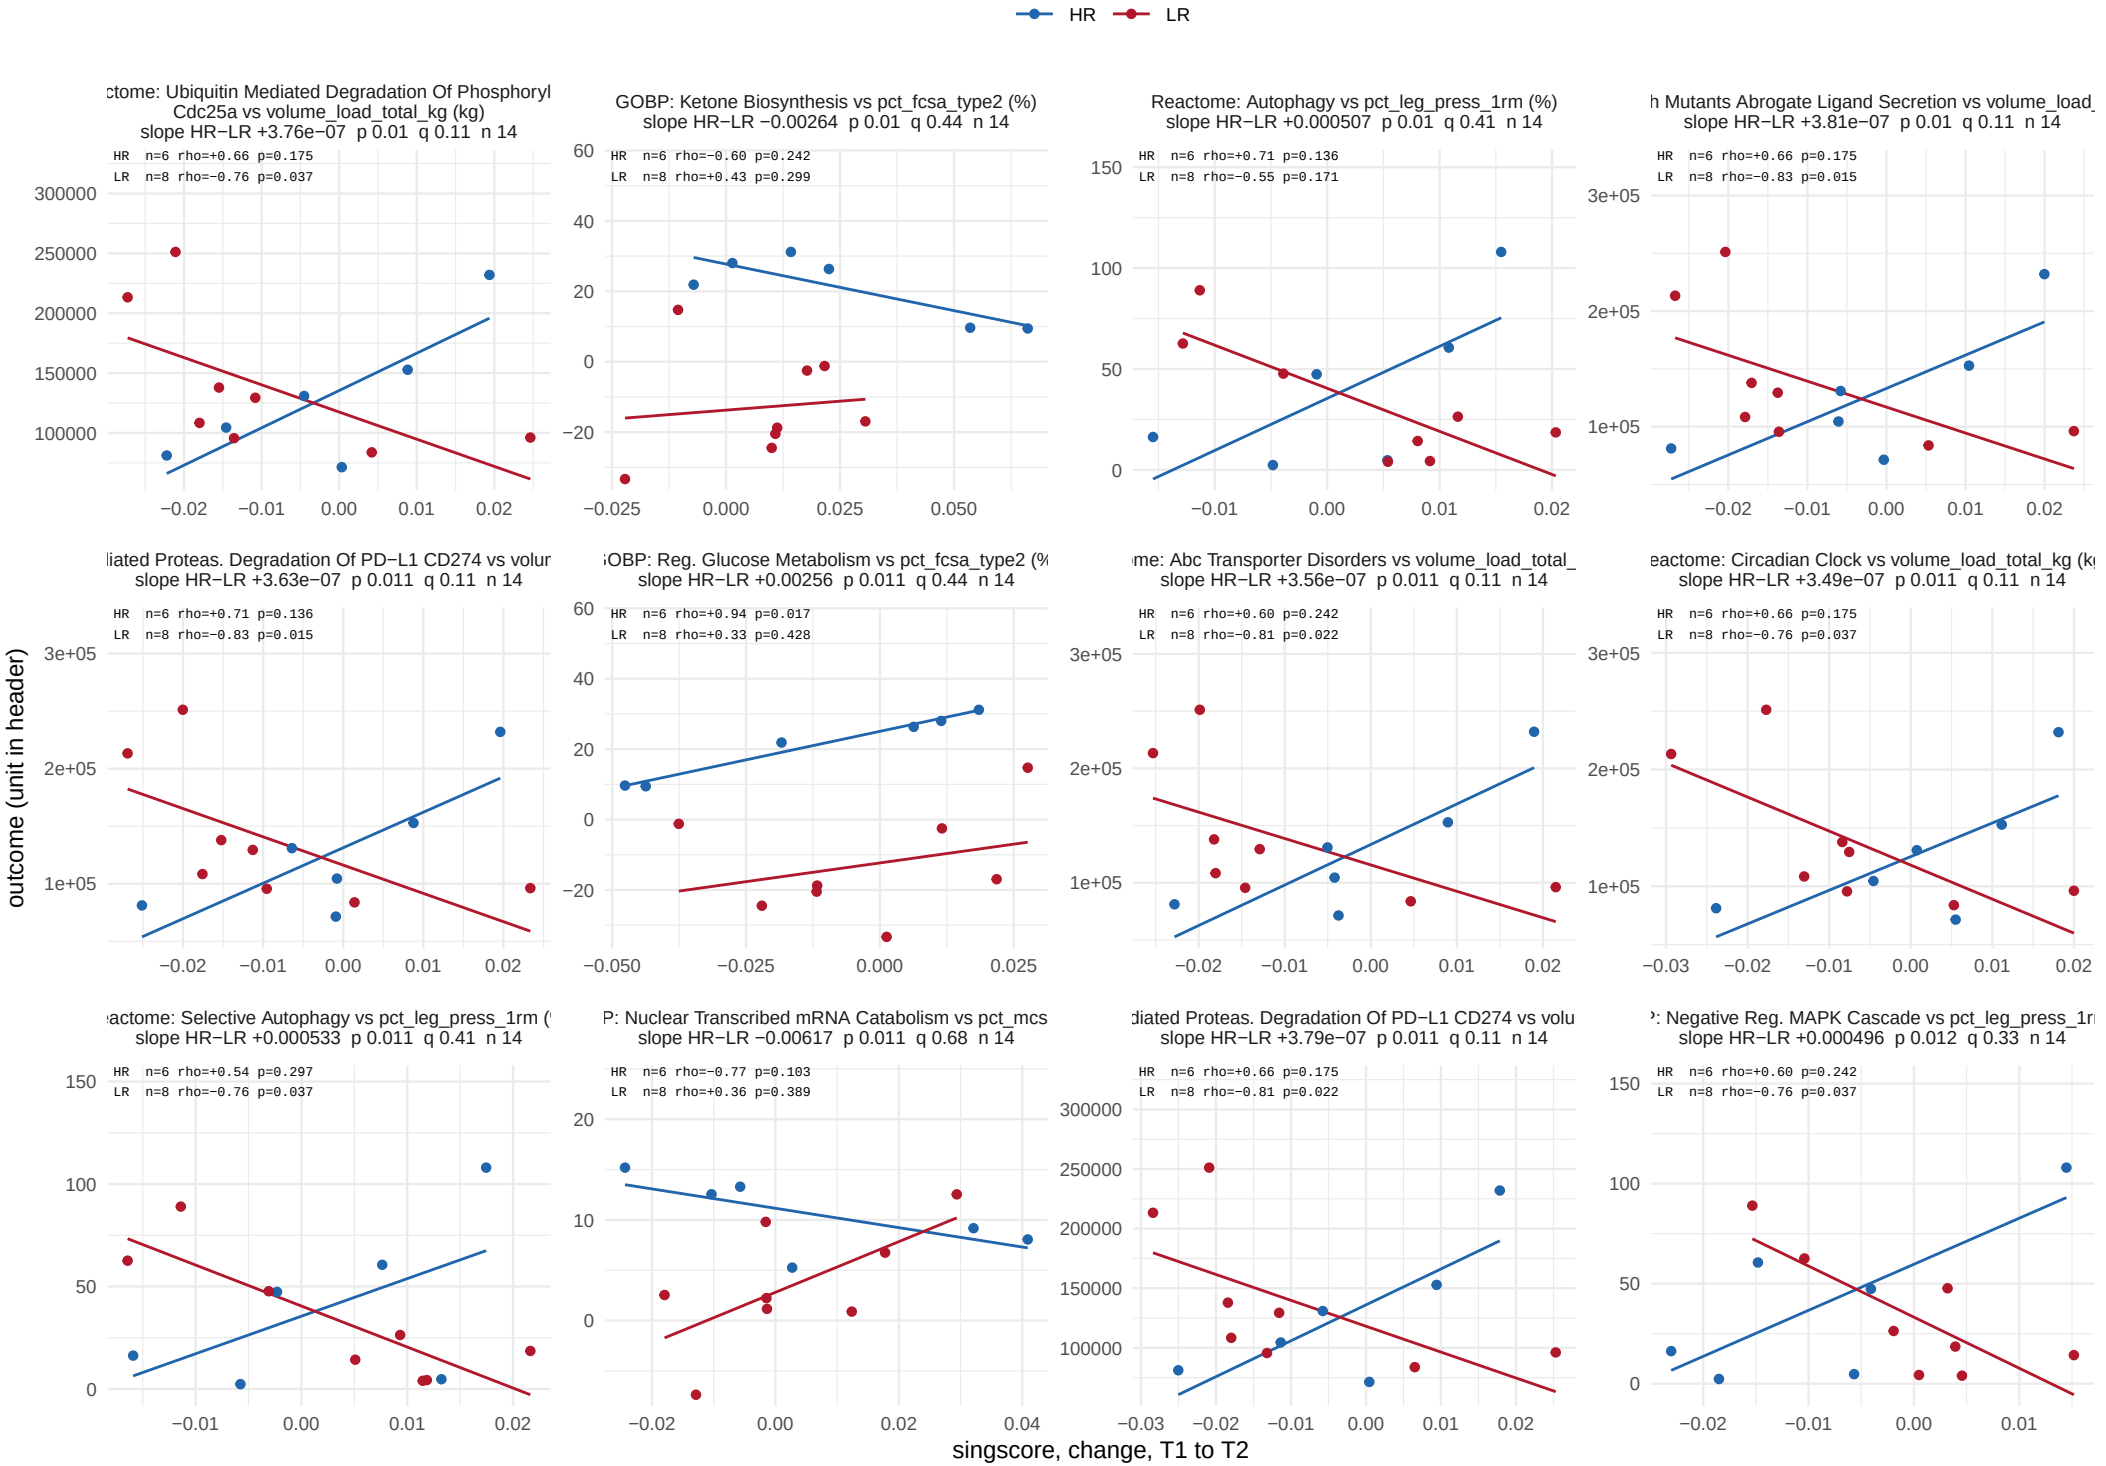


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, training window


506 of 11024 feature−outcome pairs at p < 0.05, 18 at BH < 0.05. Page 11 of 43.

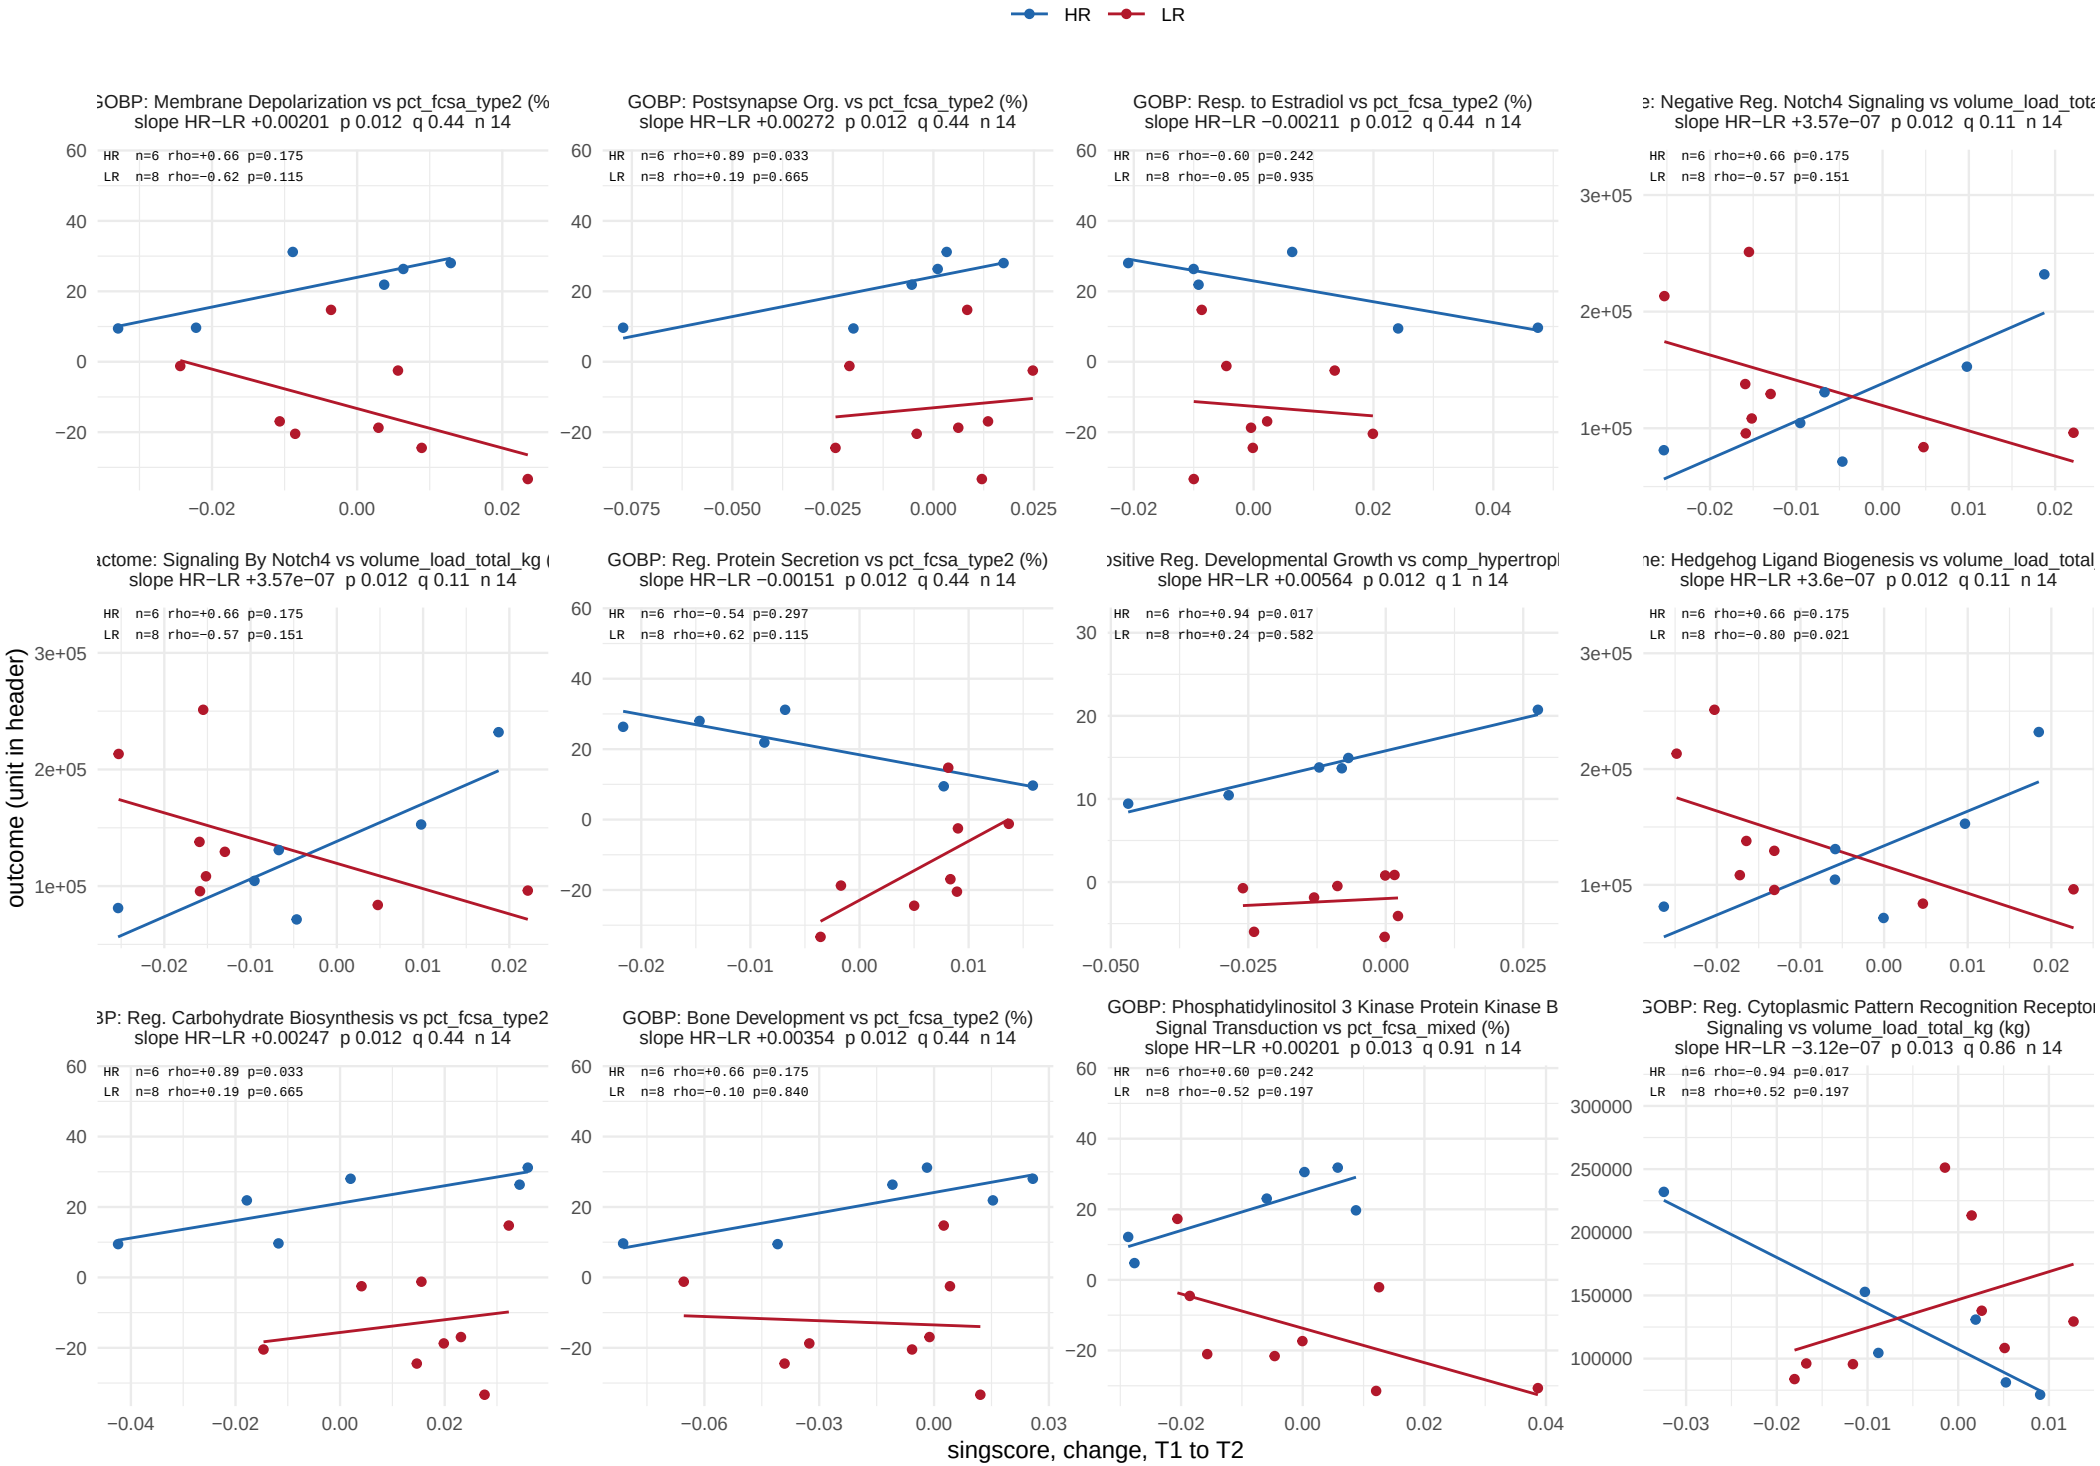


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, training window


506 of 11024 feature−outcome pairs at p < 0.05, 18 at BH < 0.05. Page 12 of 43.

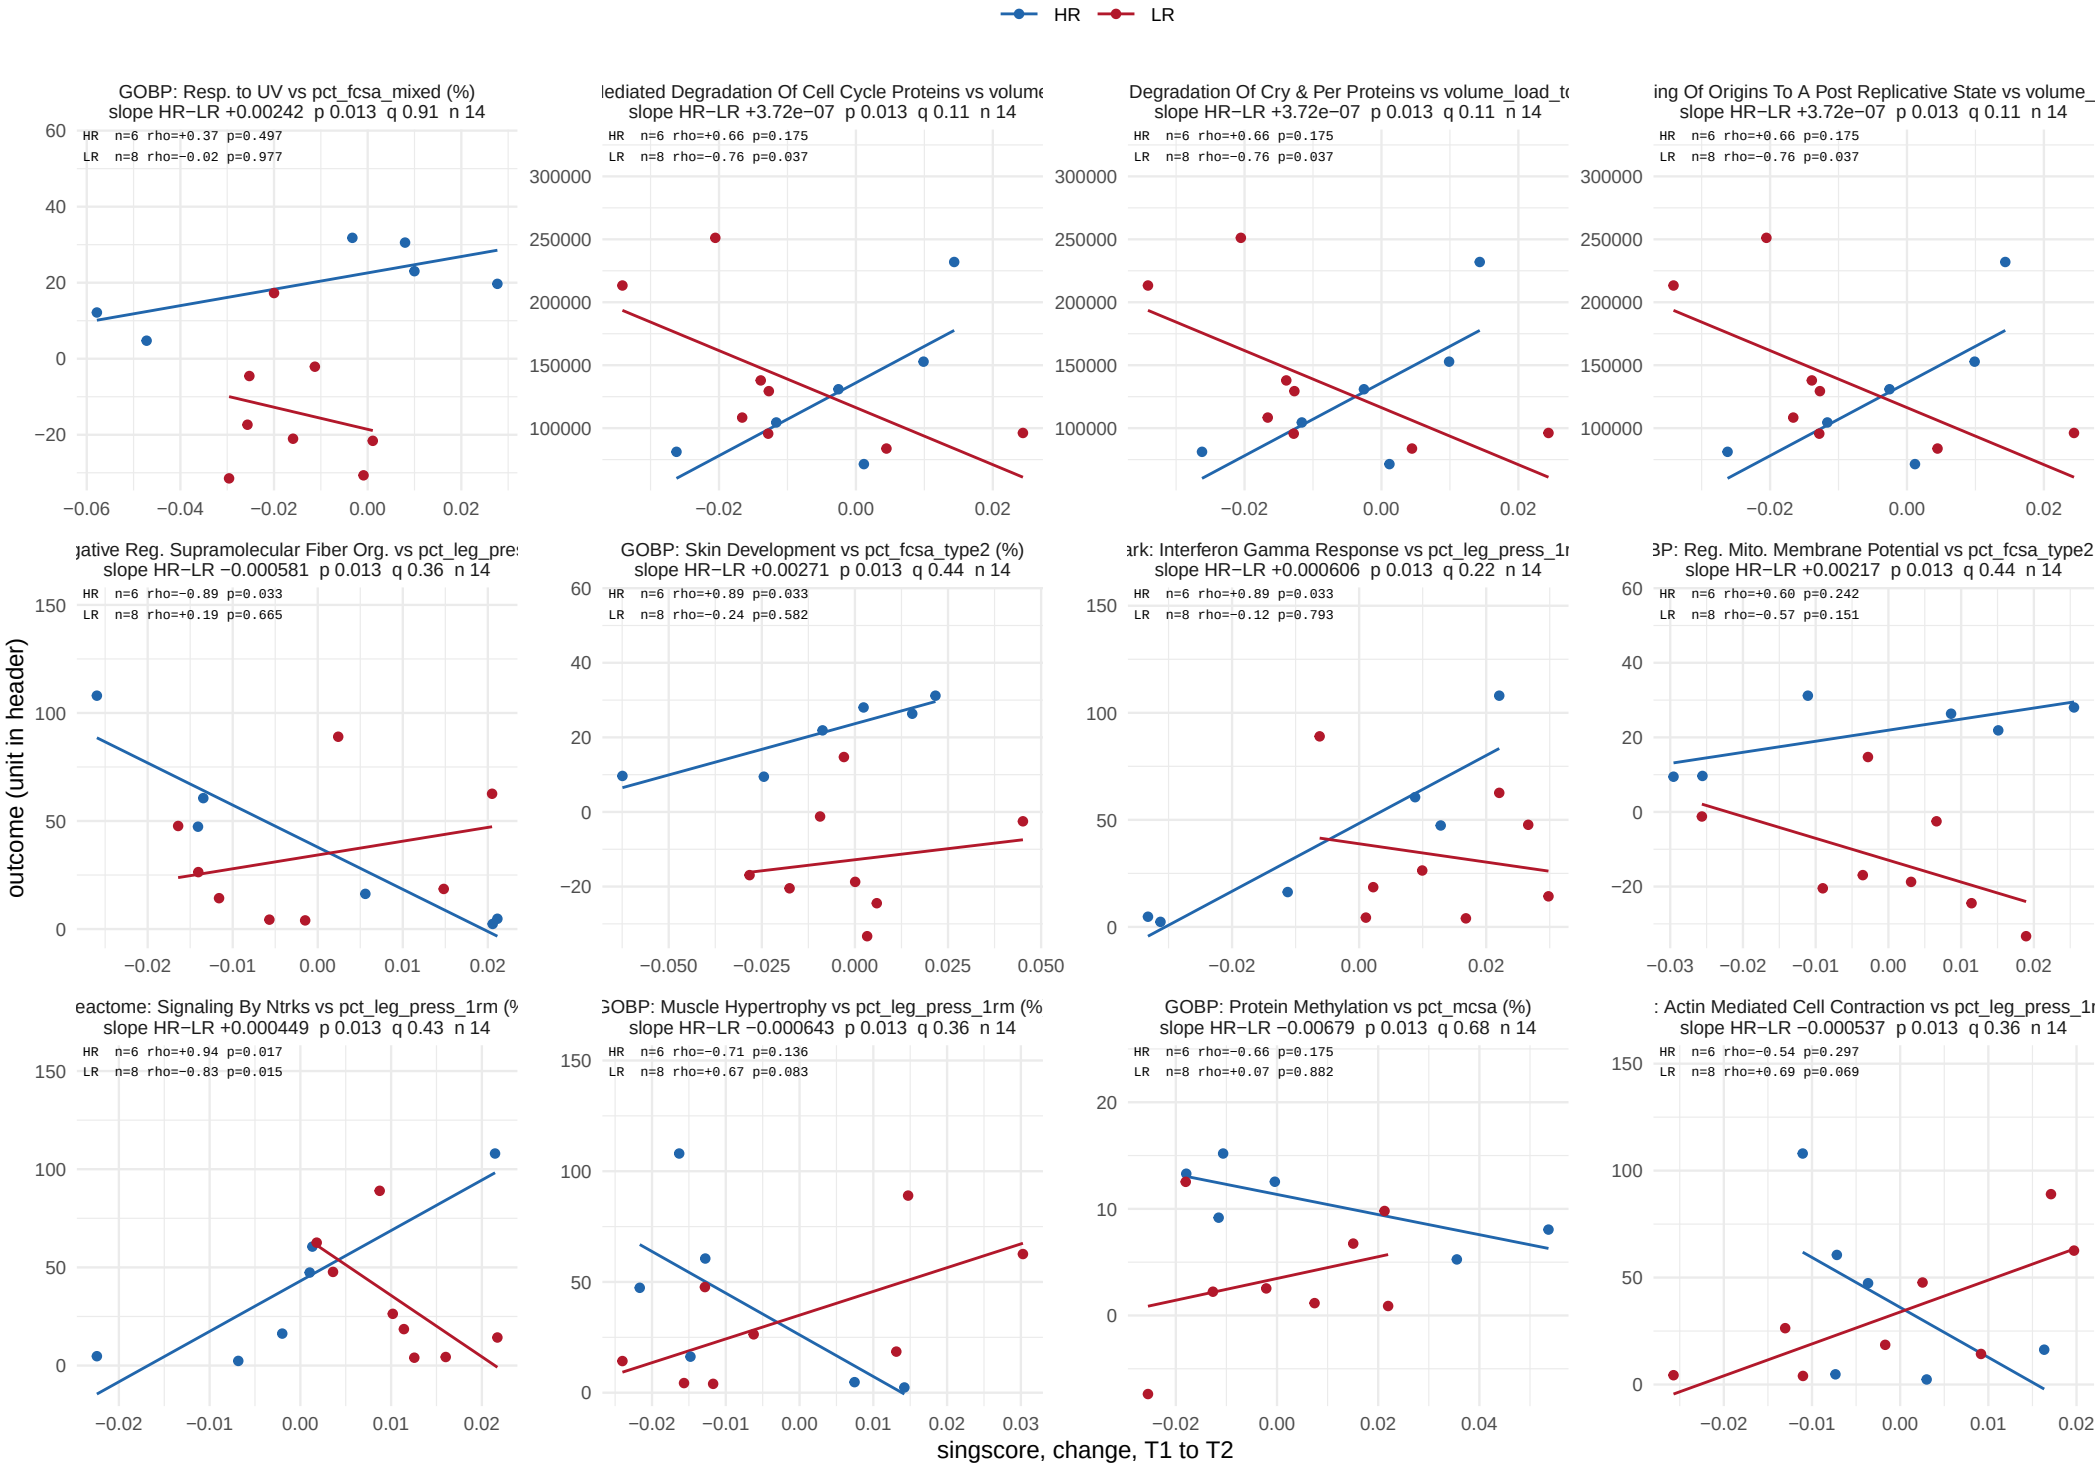


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, training window


506 of 11024 feature−outcome pairs at p < 0.05, 18 at BH < 0.05. Page 13 of 43.

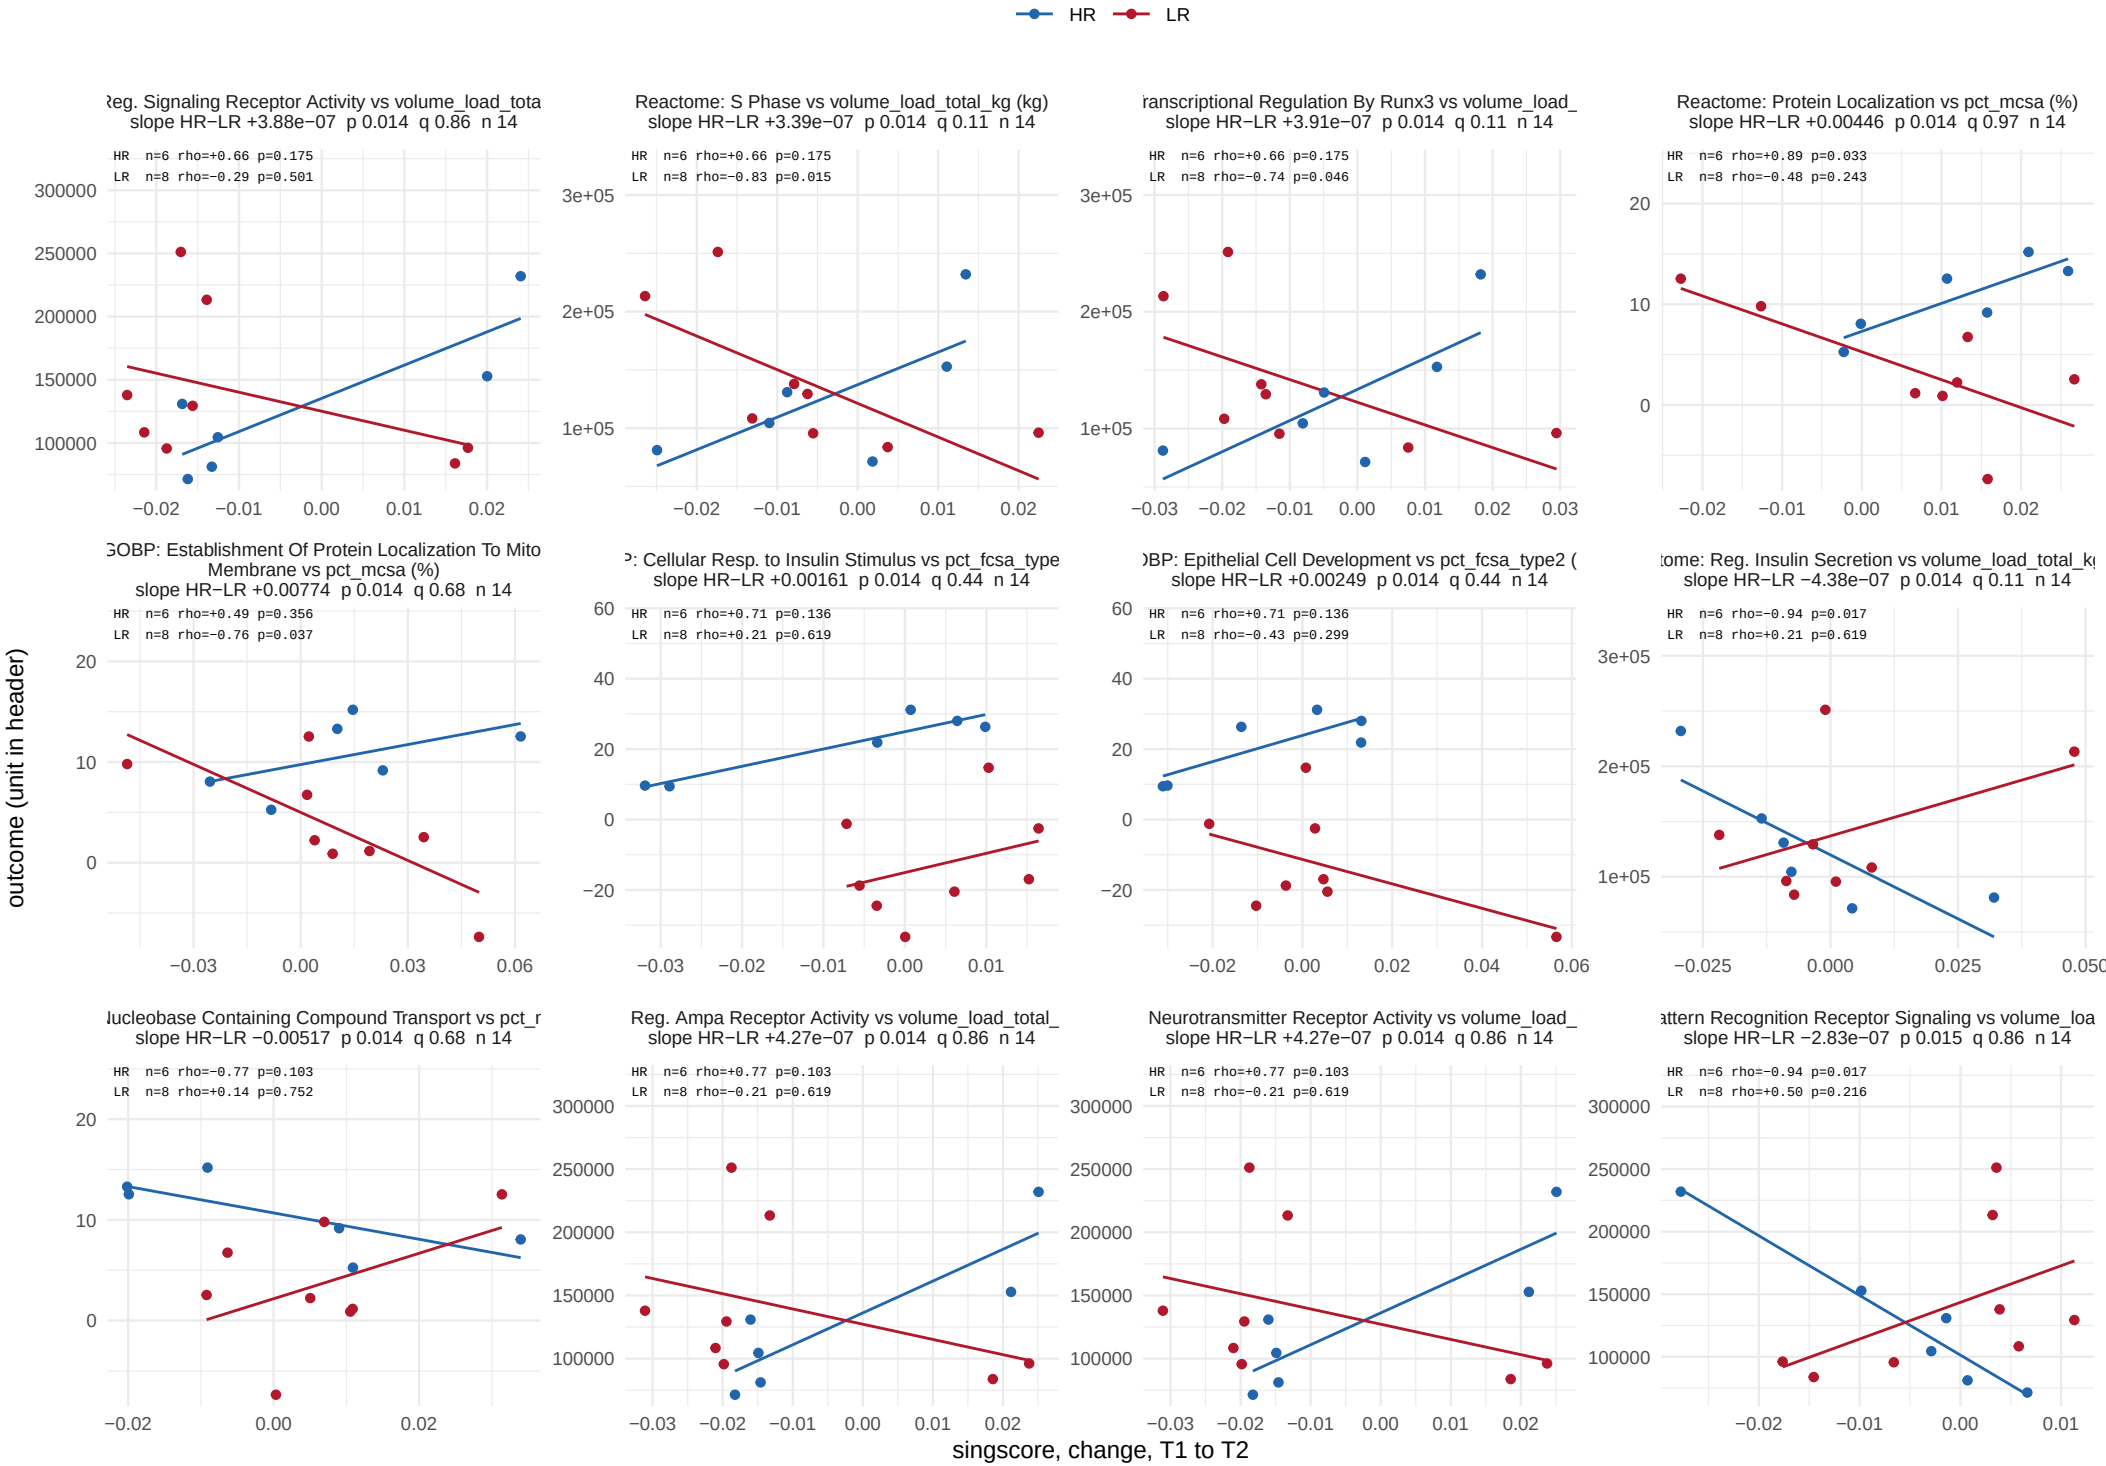


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, training window


506 of 11024 feature−outcome pairs at p < 0.05, 18 at BH < 0.05. Page 14 of 43.

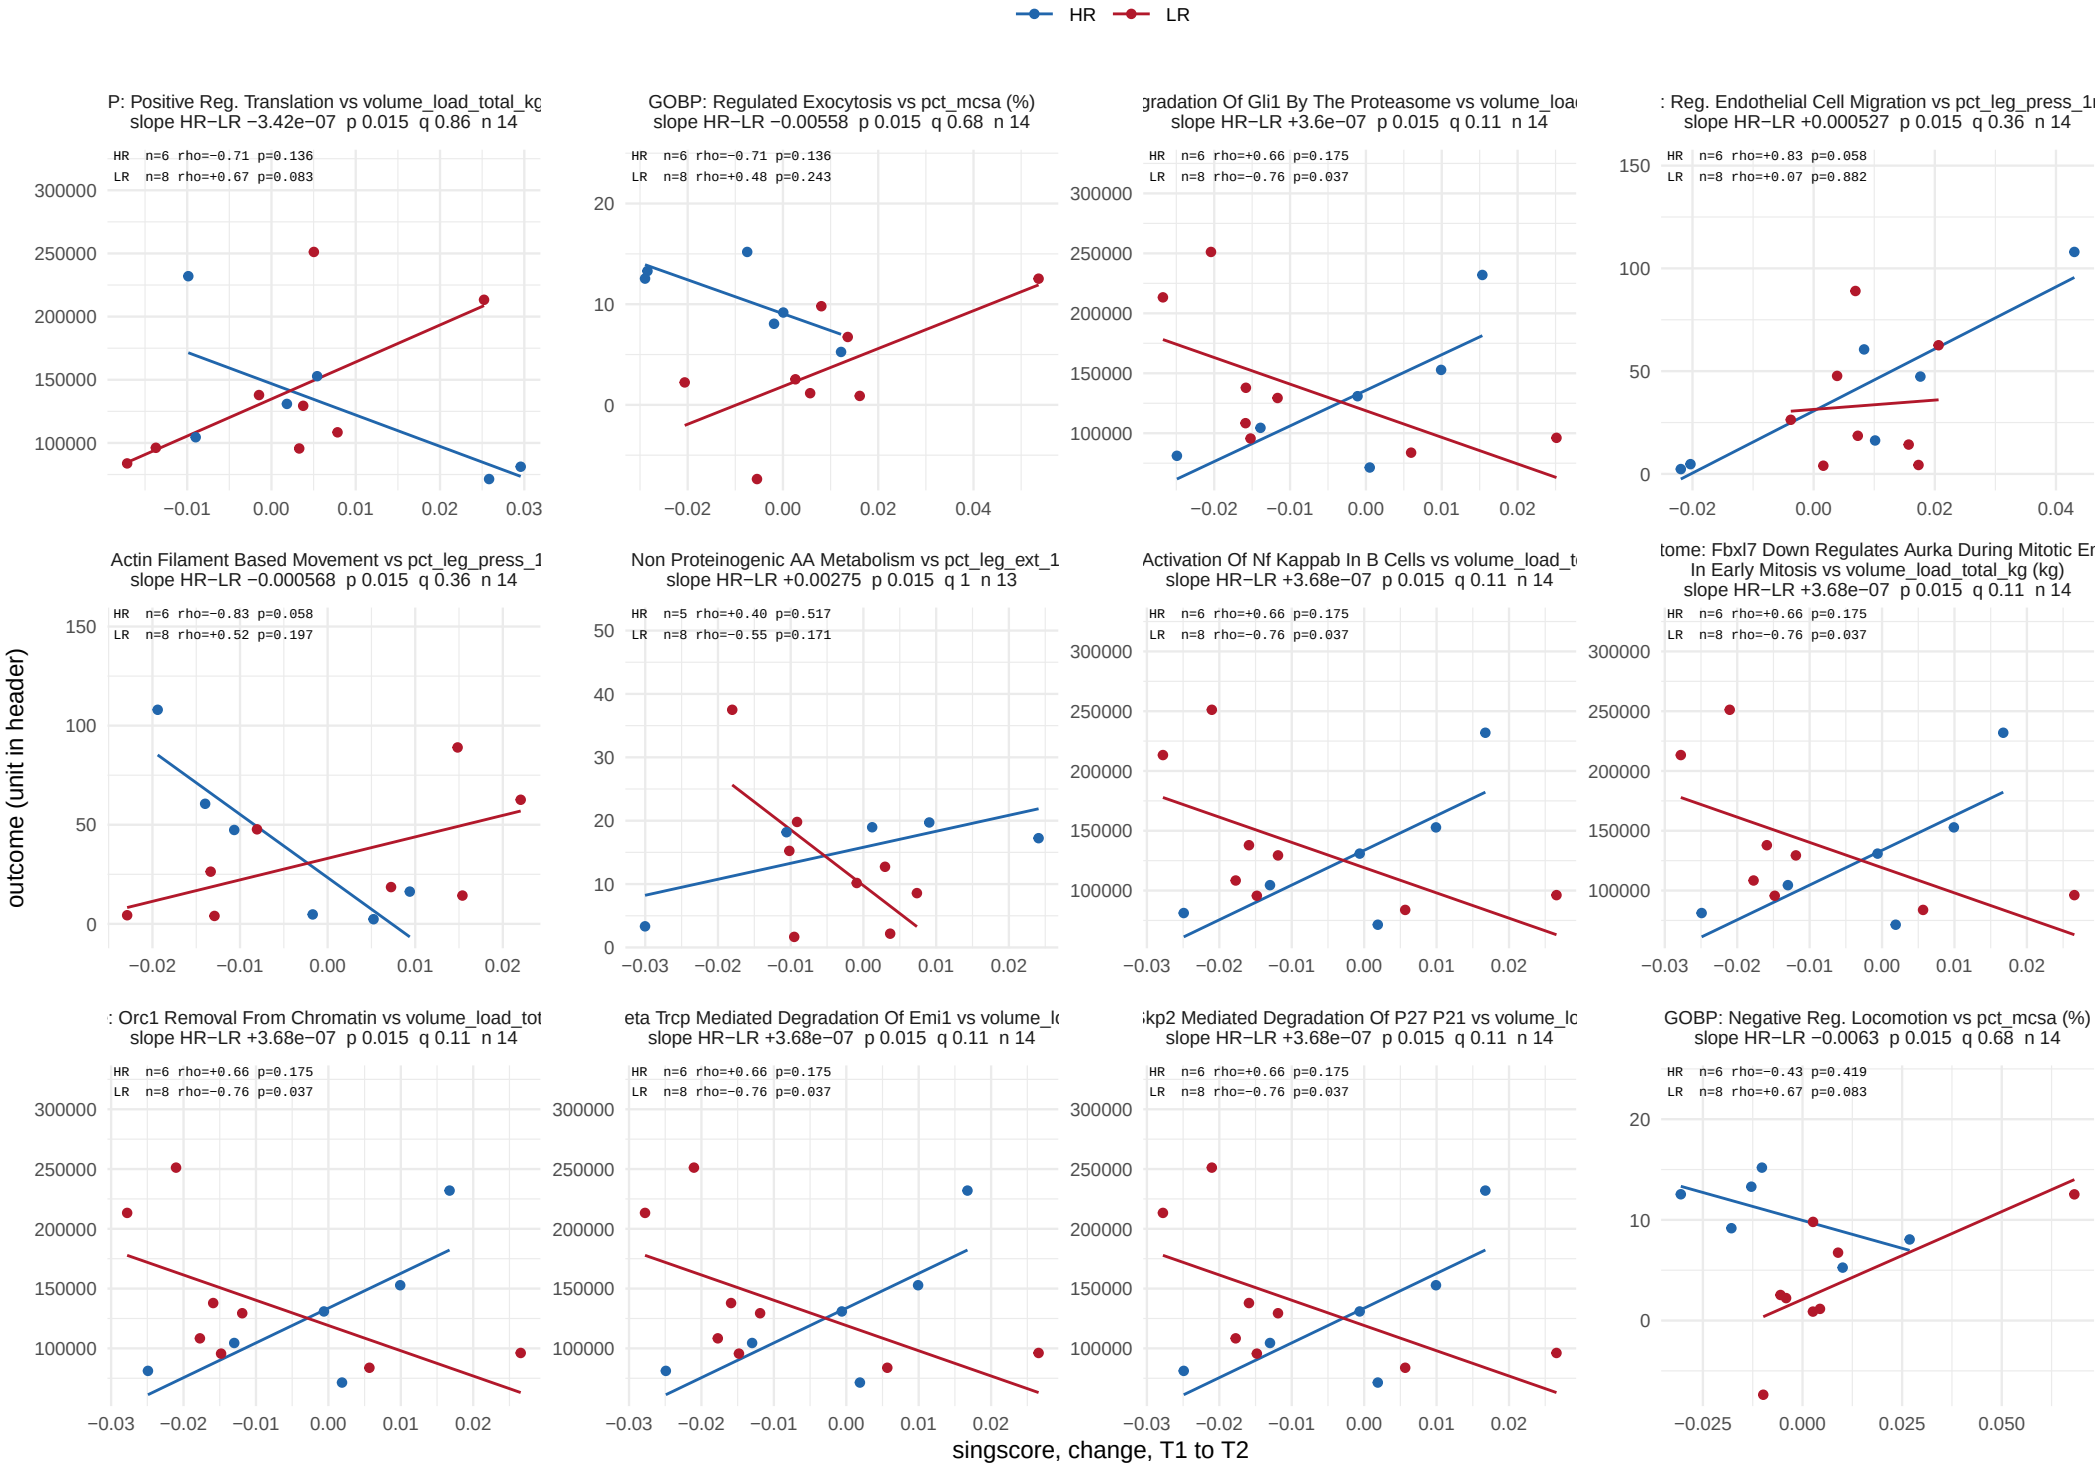


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, training window


506 of 11024 feature−outcome pairs at p < 0.05, 18 at BH < 0.05. Page 15 of 43.

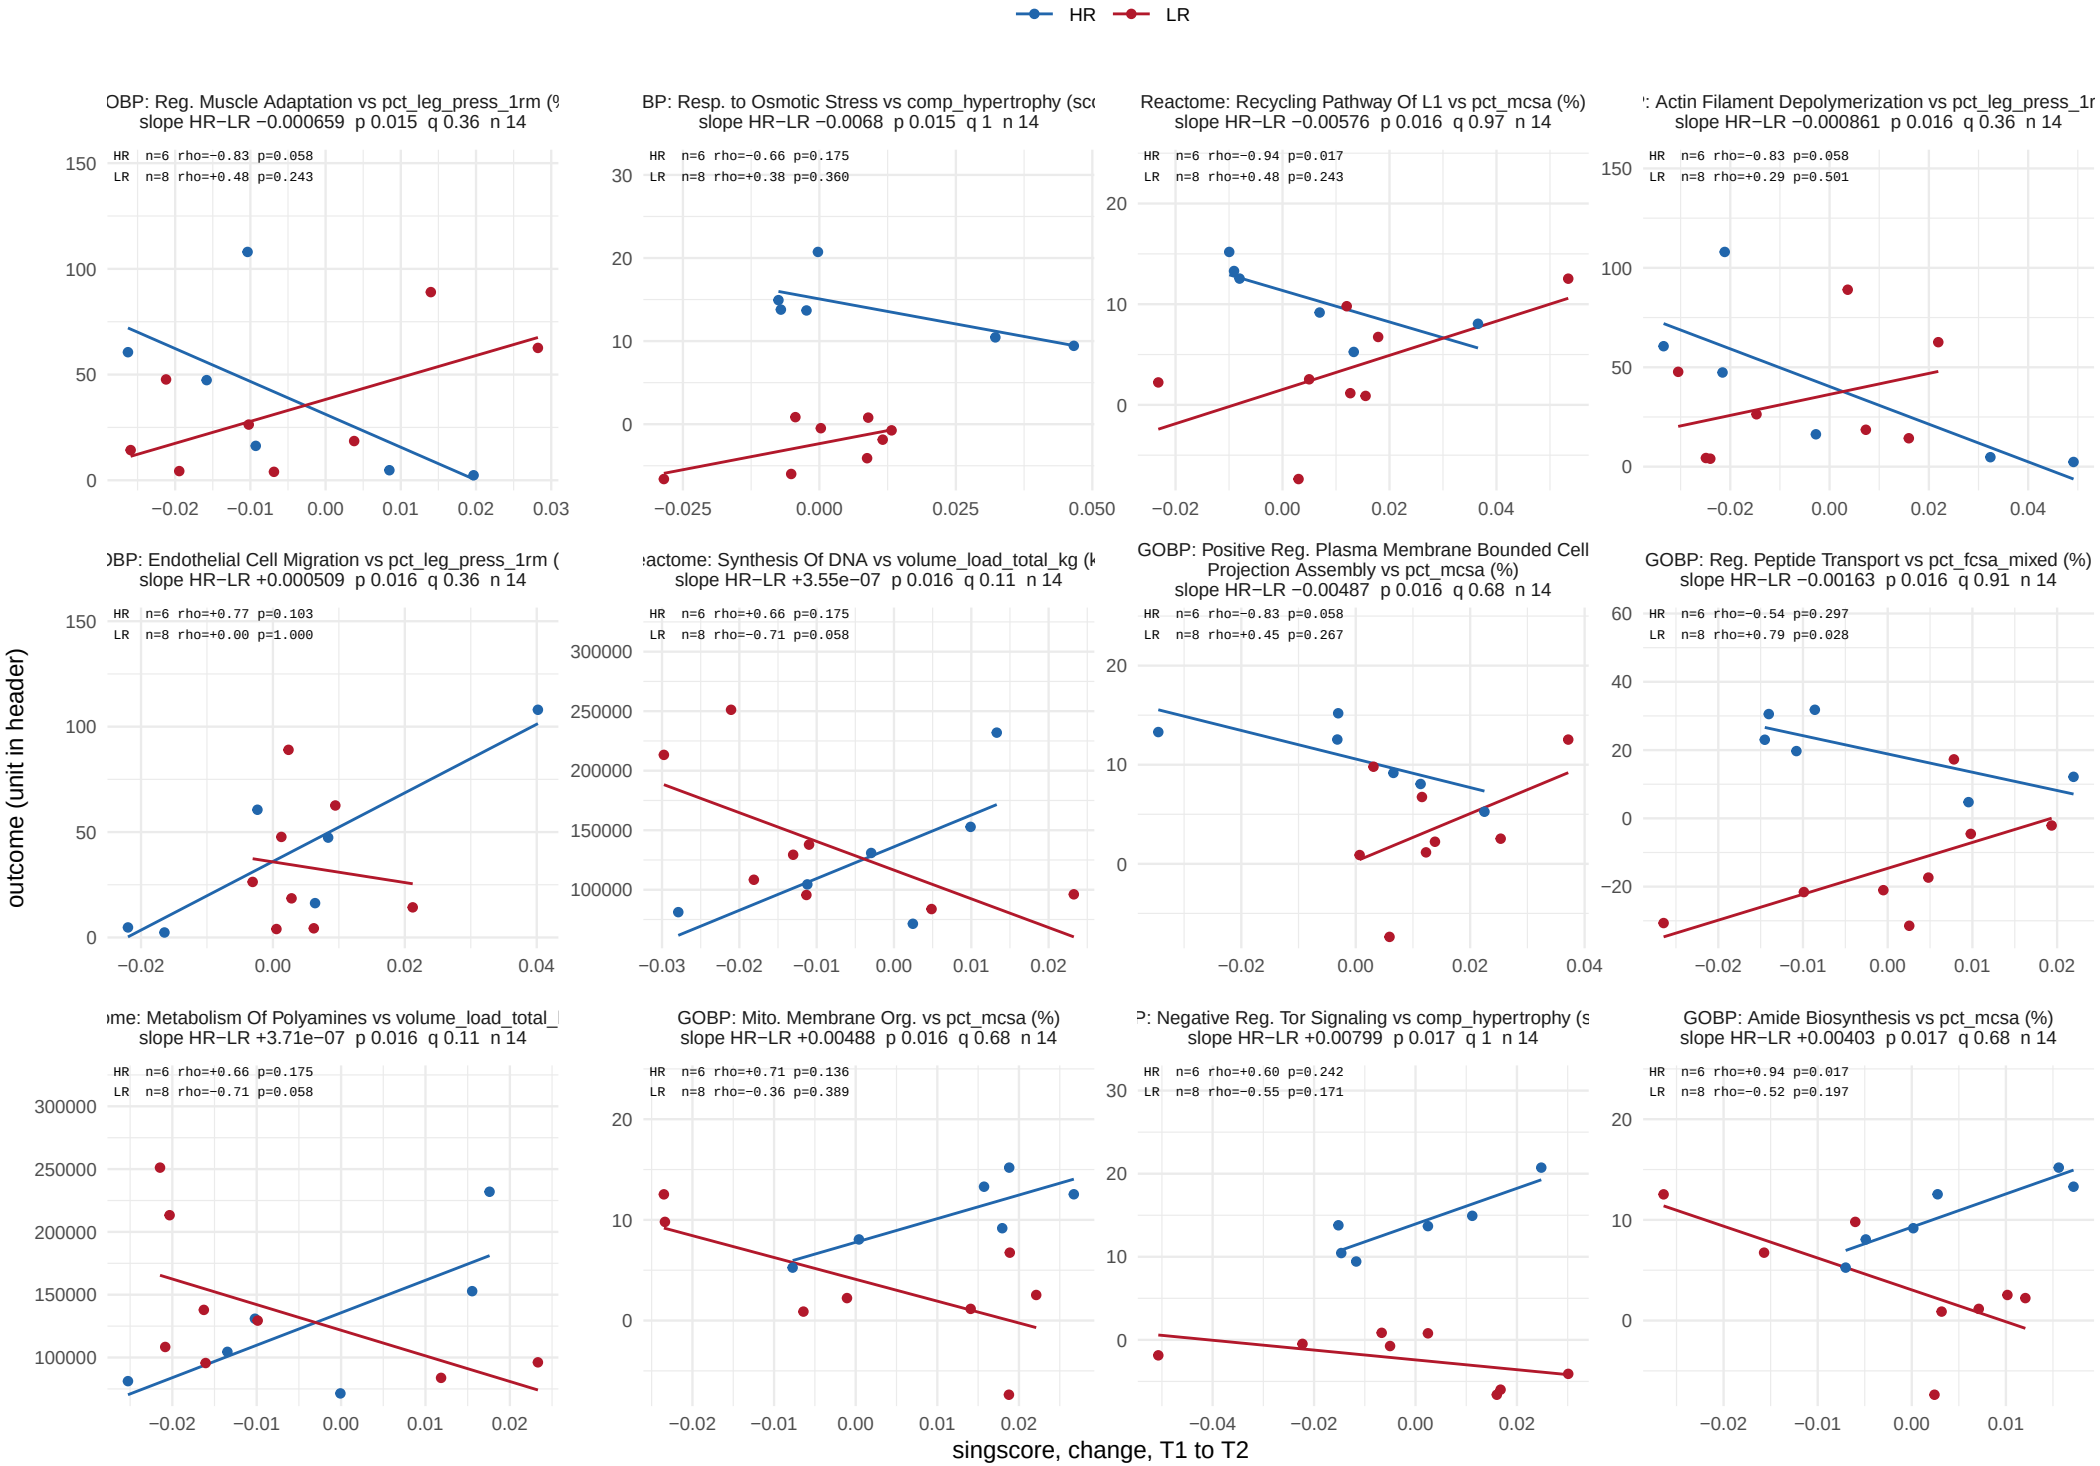


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, training window


506 of 11024 feature−outcome pairs at p < 0.05, 18 at BH < 0.05. Page 16 of 43.

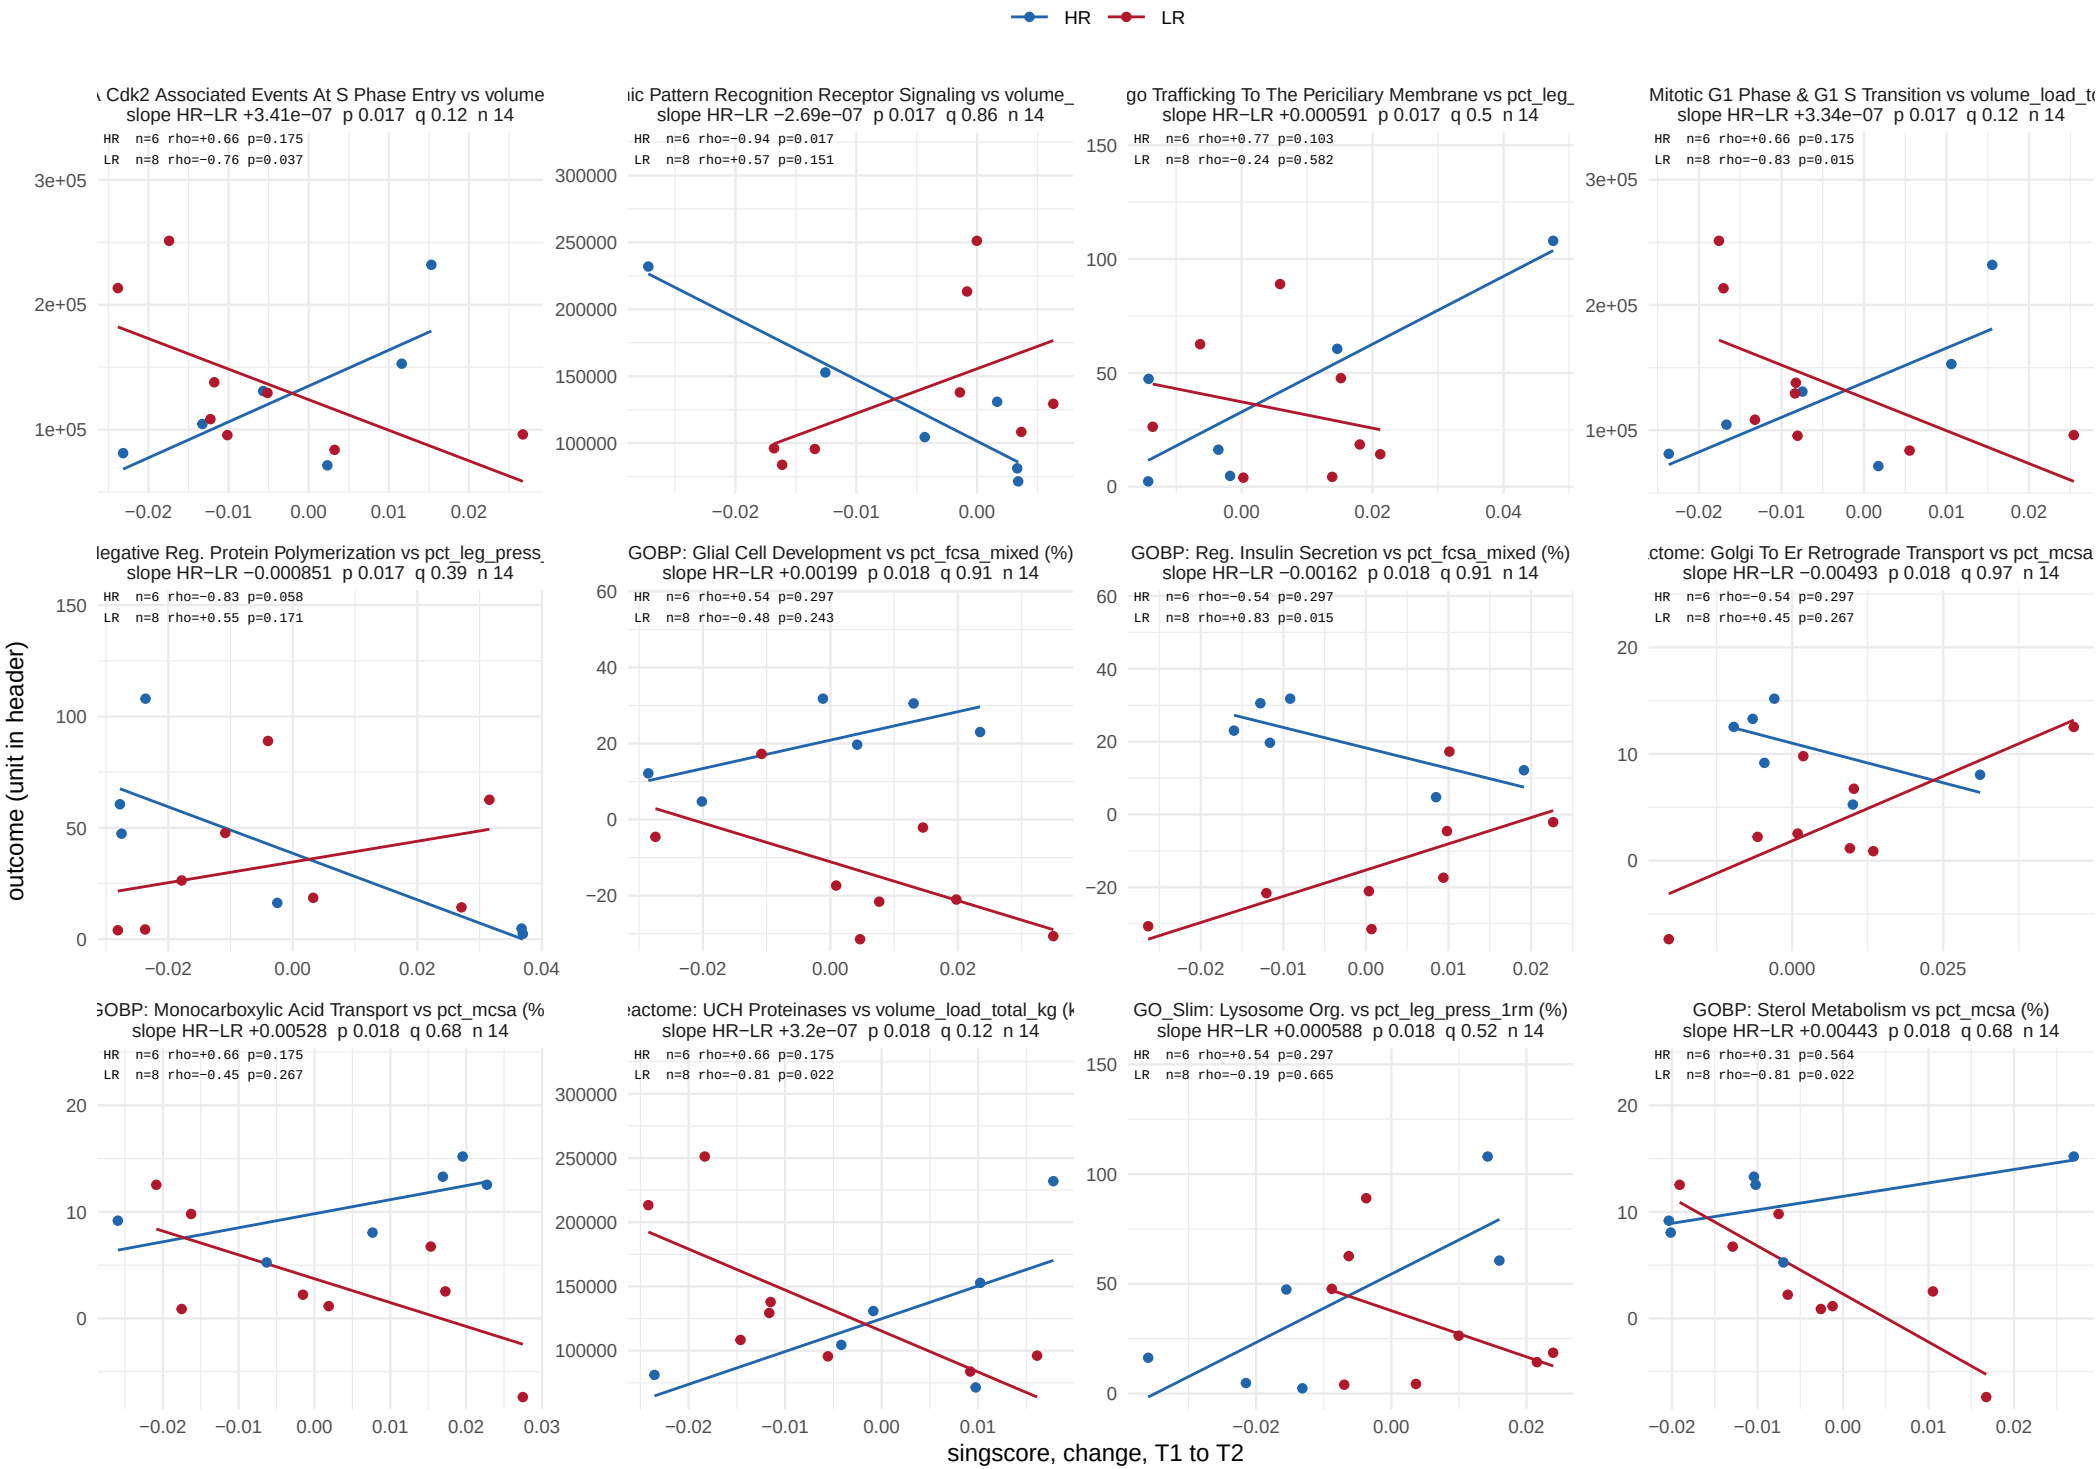


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, training window


506 of 11024 feature−outcome pairs at p < 0.05, 18 at BH < 0.05. Page 17 of 43.

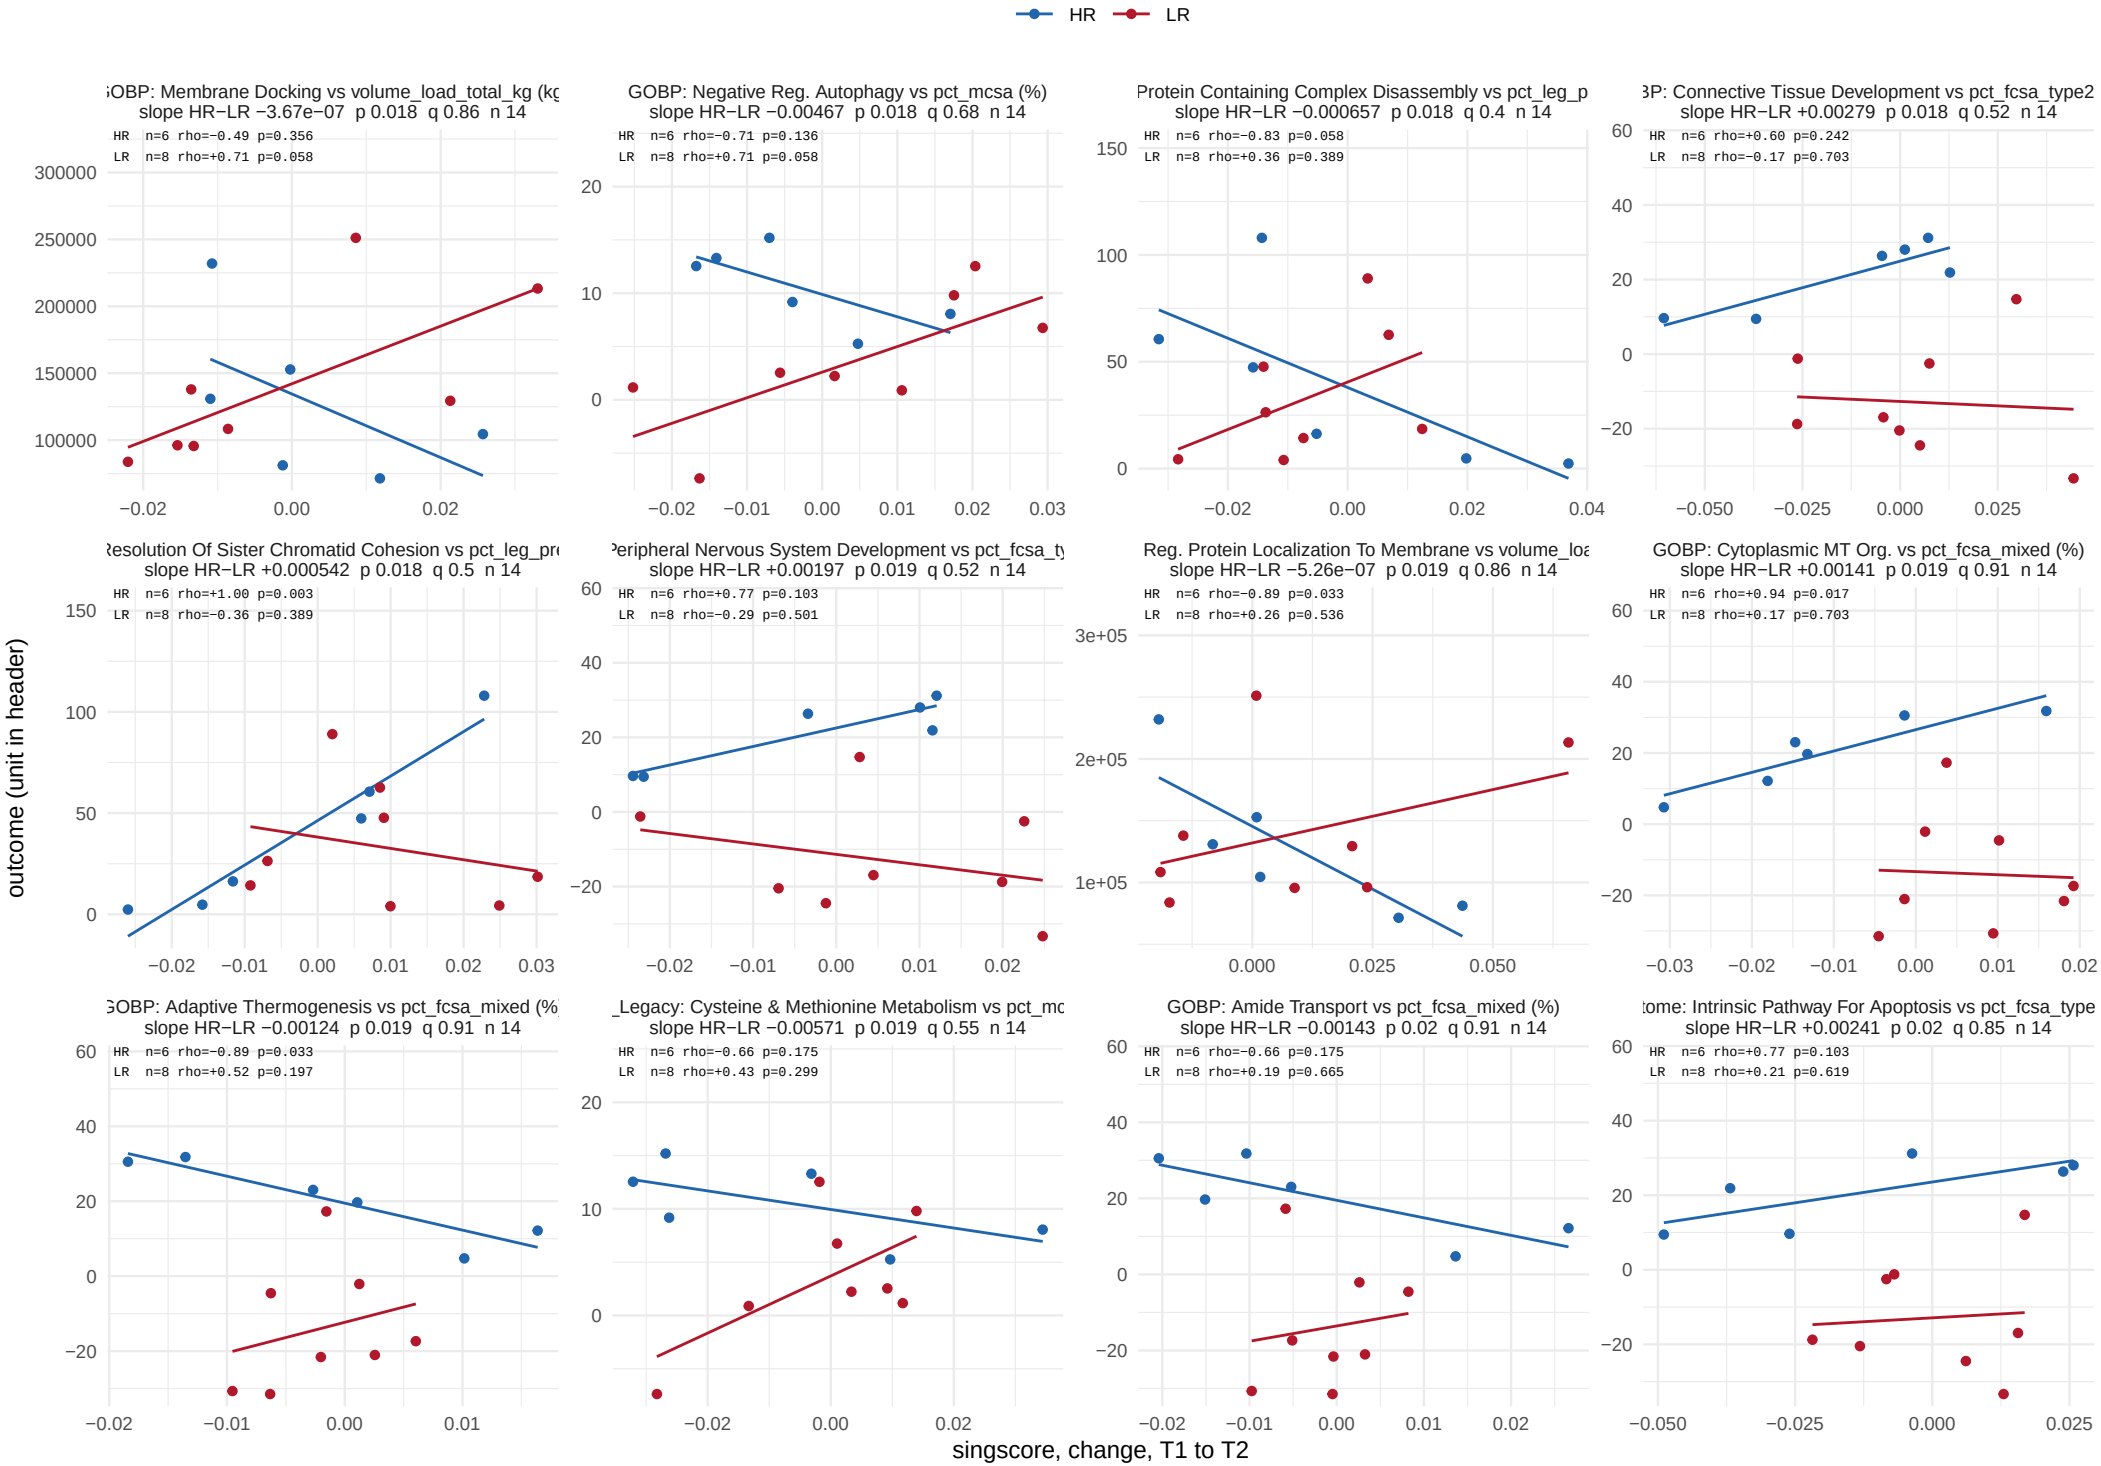


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, training window


506 of 11024 feature−outcome pairs at p < 0.05, 18 at BH < 0.05. Page 18 of 43.

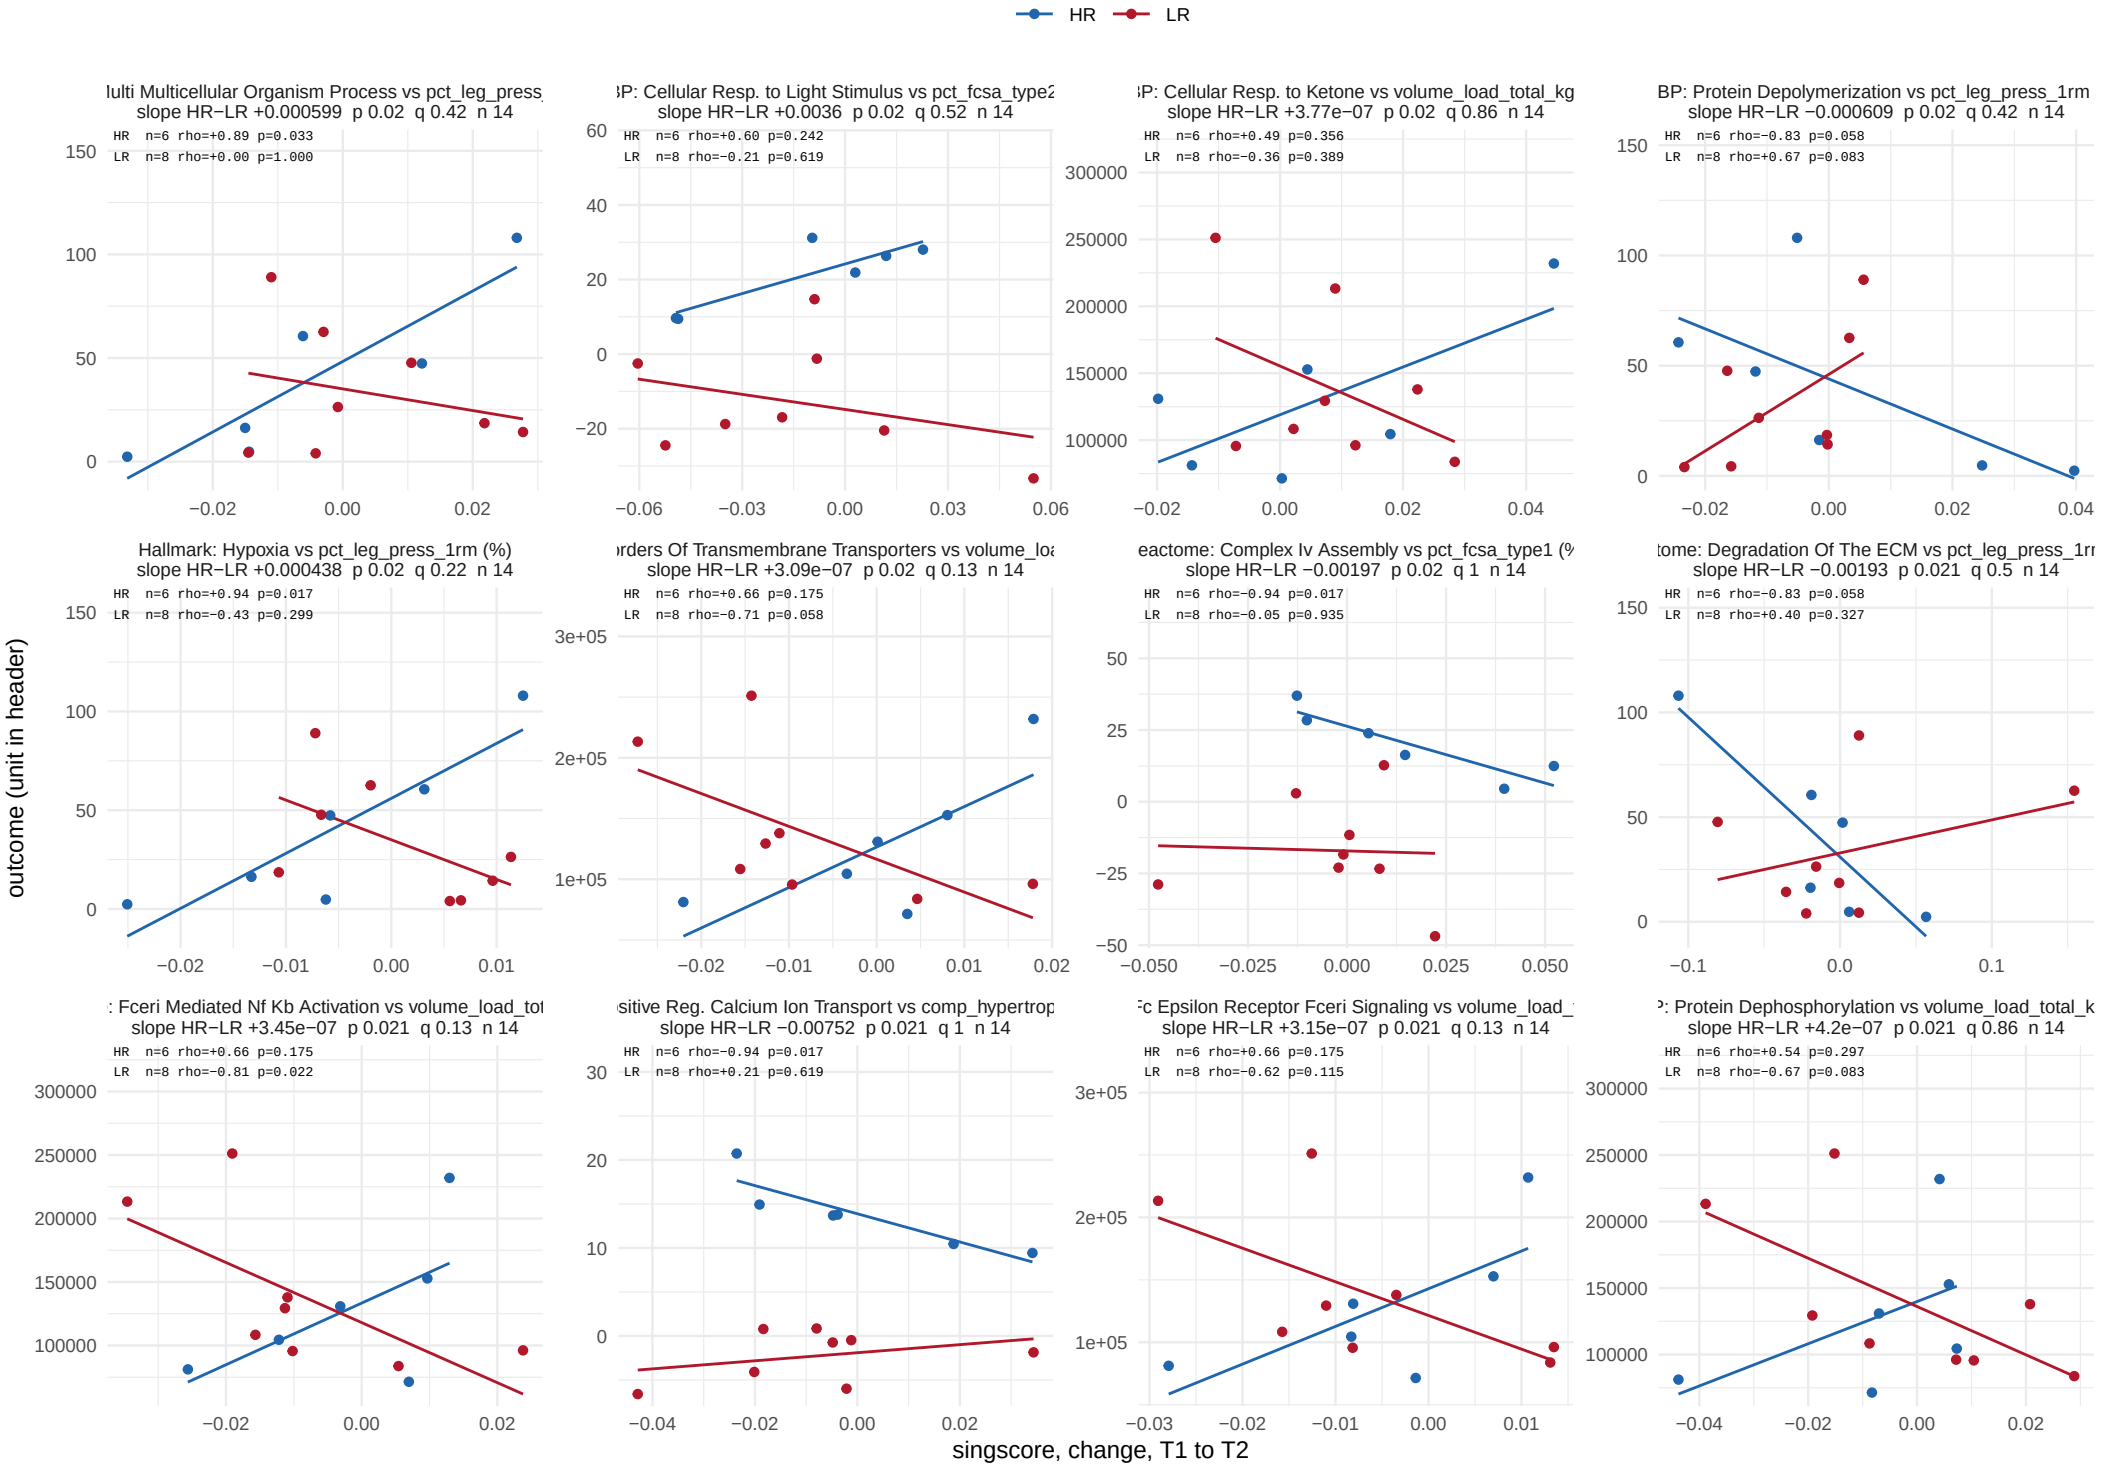


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, training window


506 of 11024 feature−outcome pairs at p < 0.05, 18 at BH < 0.05. Page 19 of 43.

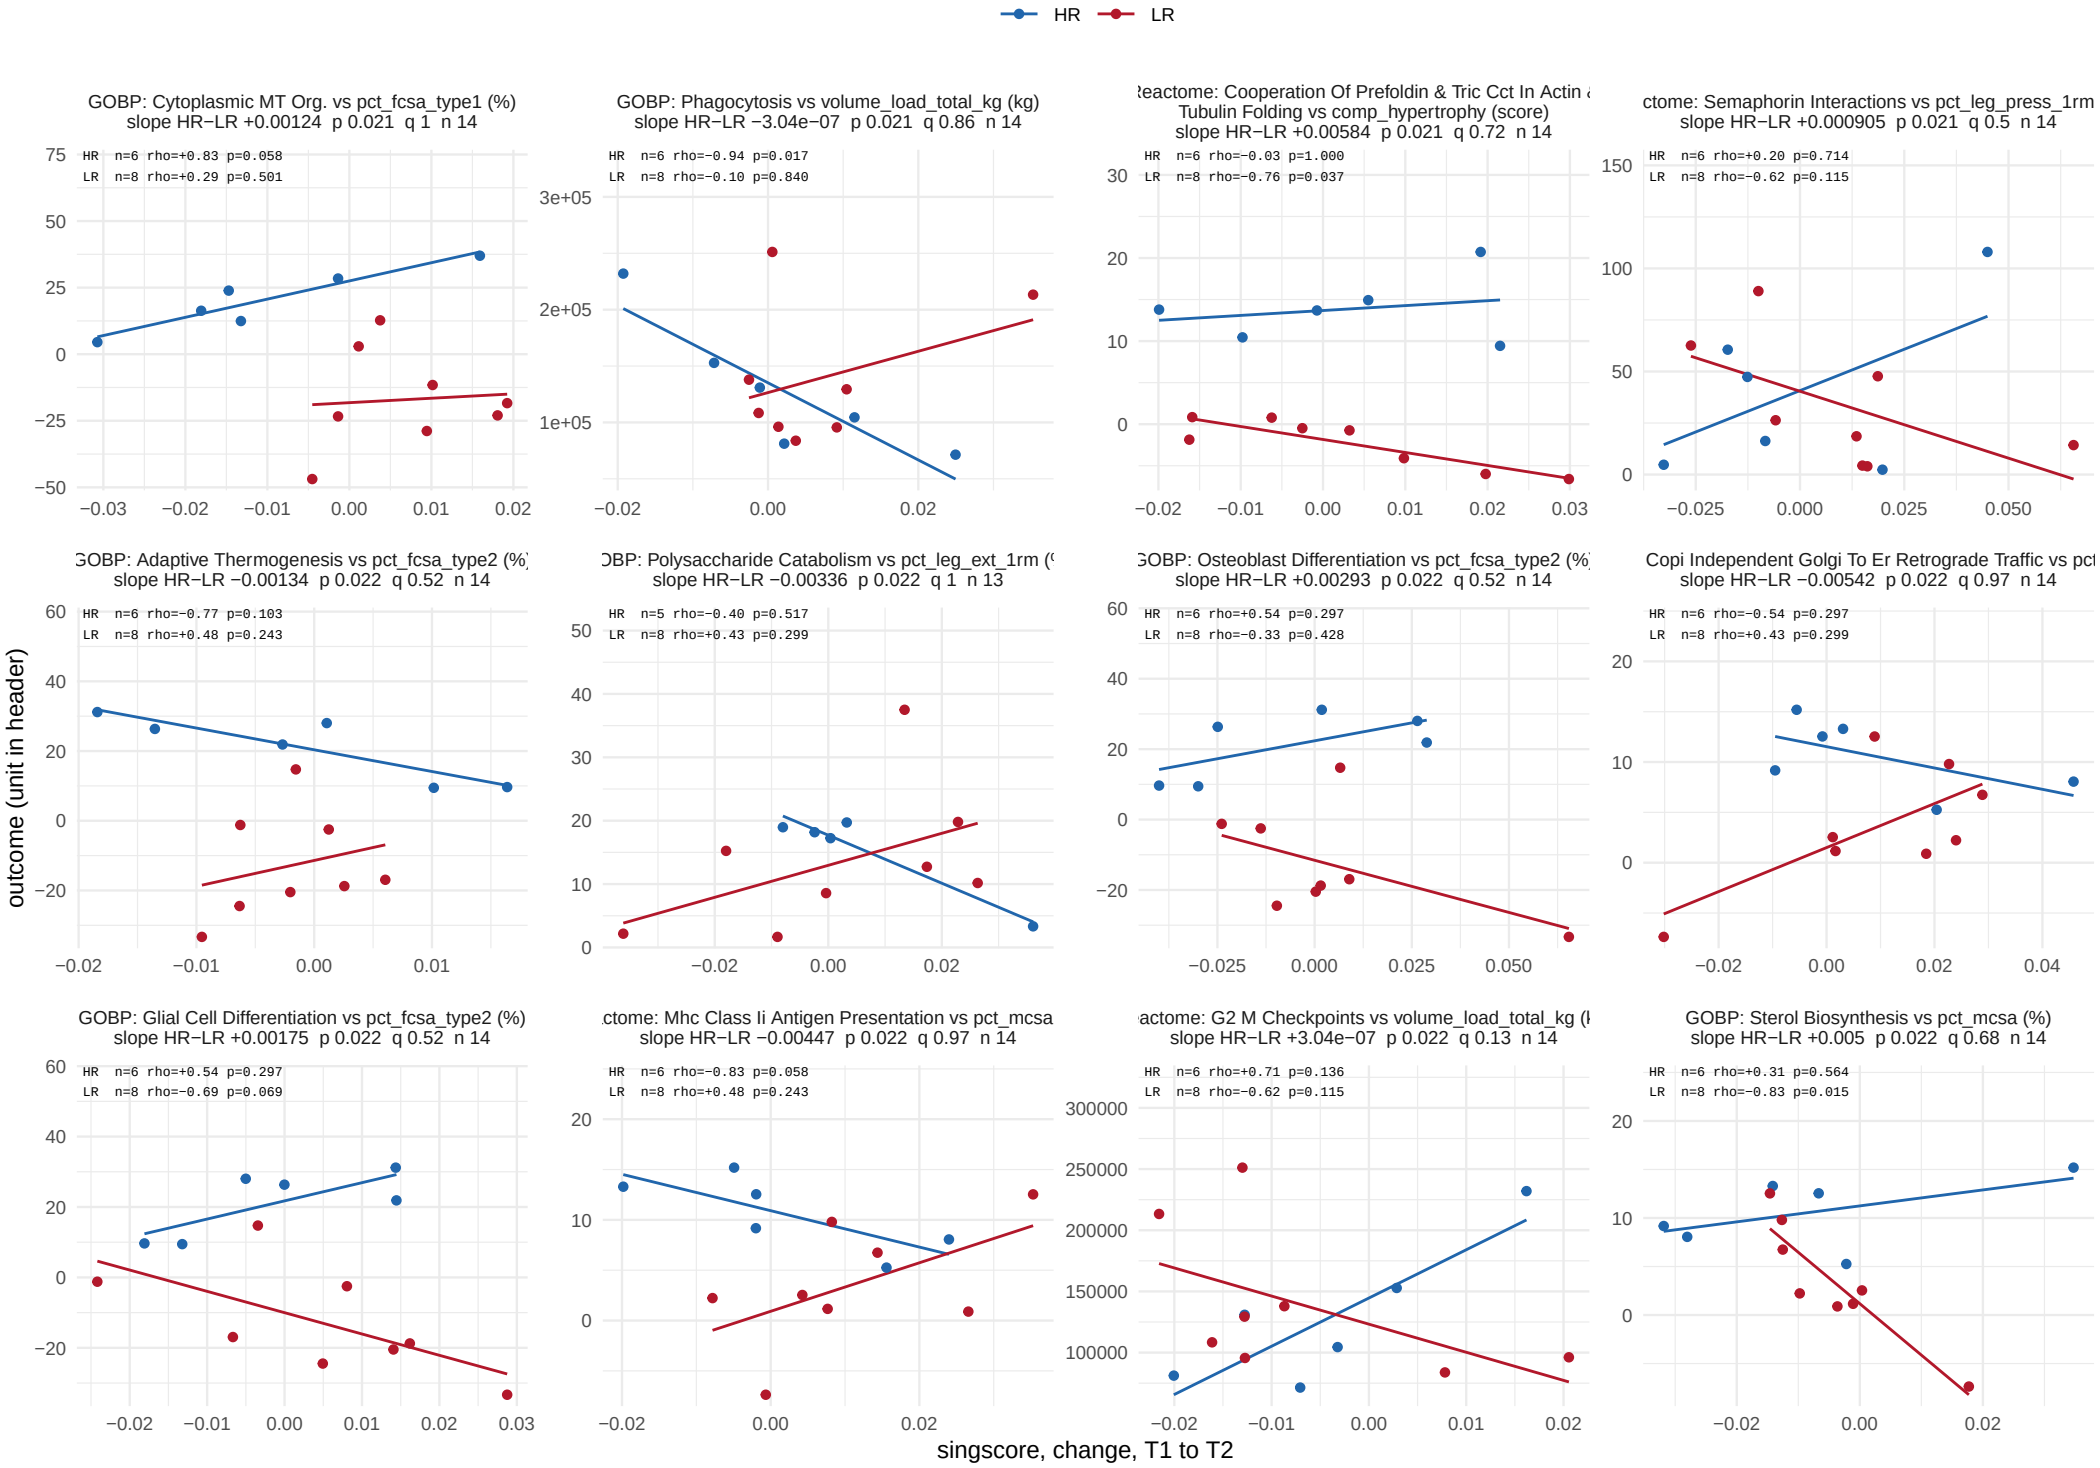


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, training window


506 of 11024 feature−outcome pairs at p < 0.05, 18 at BH < 0.05. Page 20 of 43.

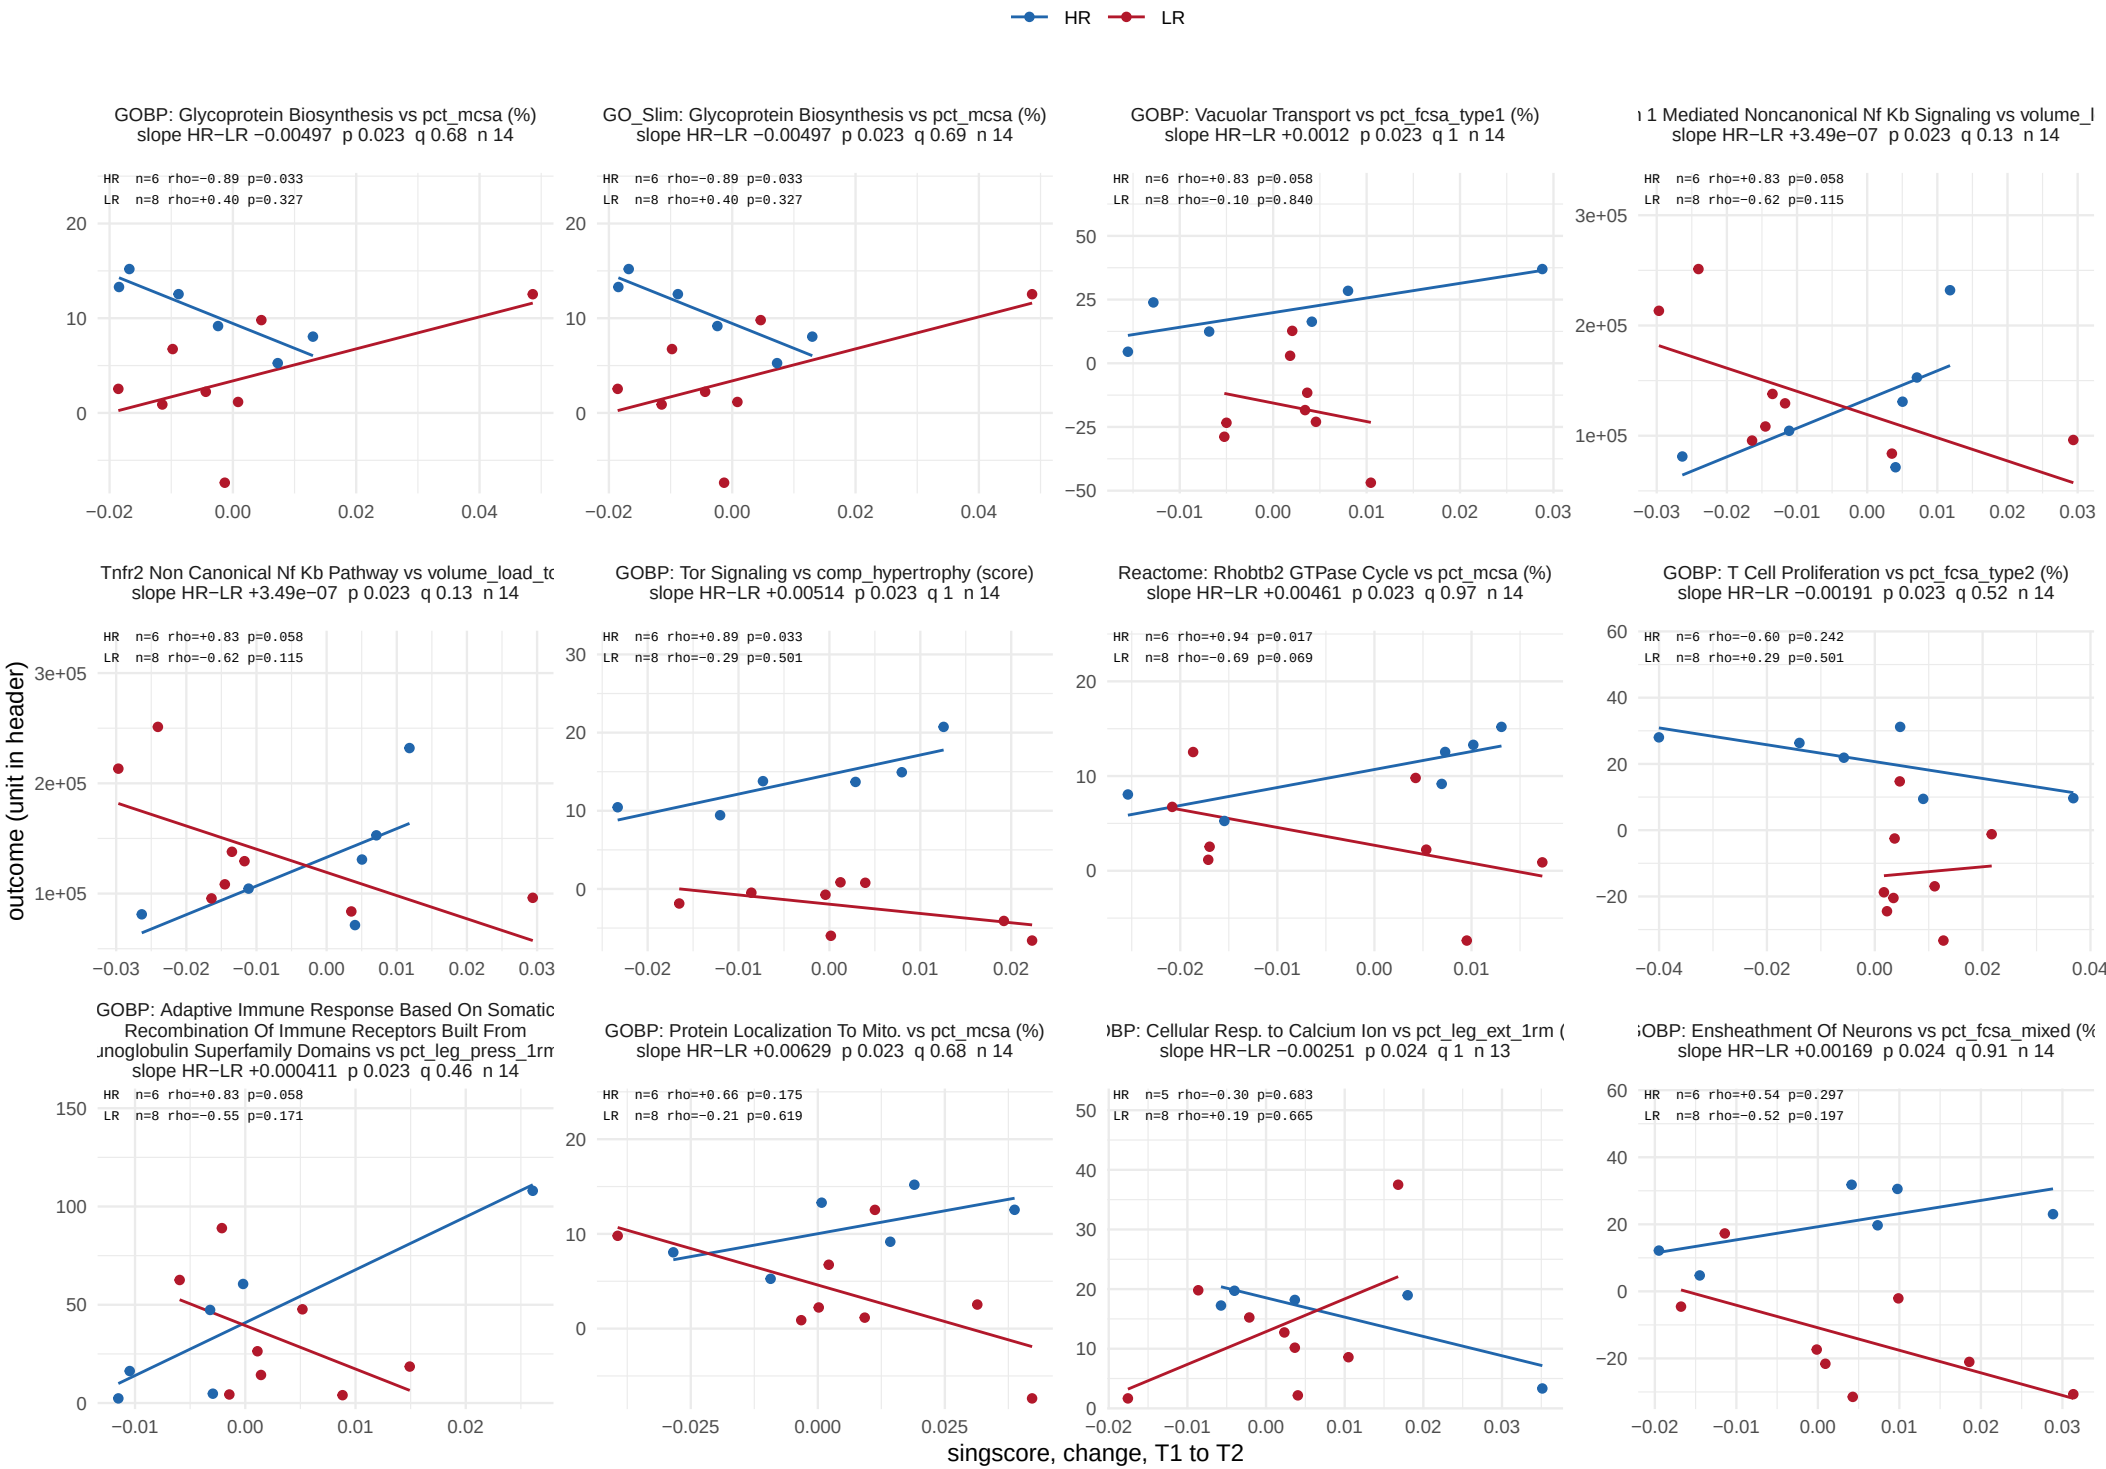


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, training window


506 of 11024 feature−outcome pairs at p < 0.05, 18 at BH < 0.05. Page 21 of 43.

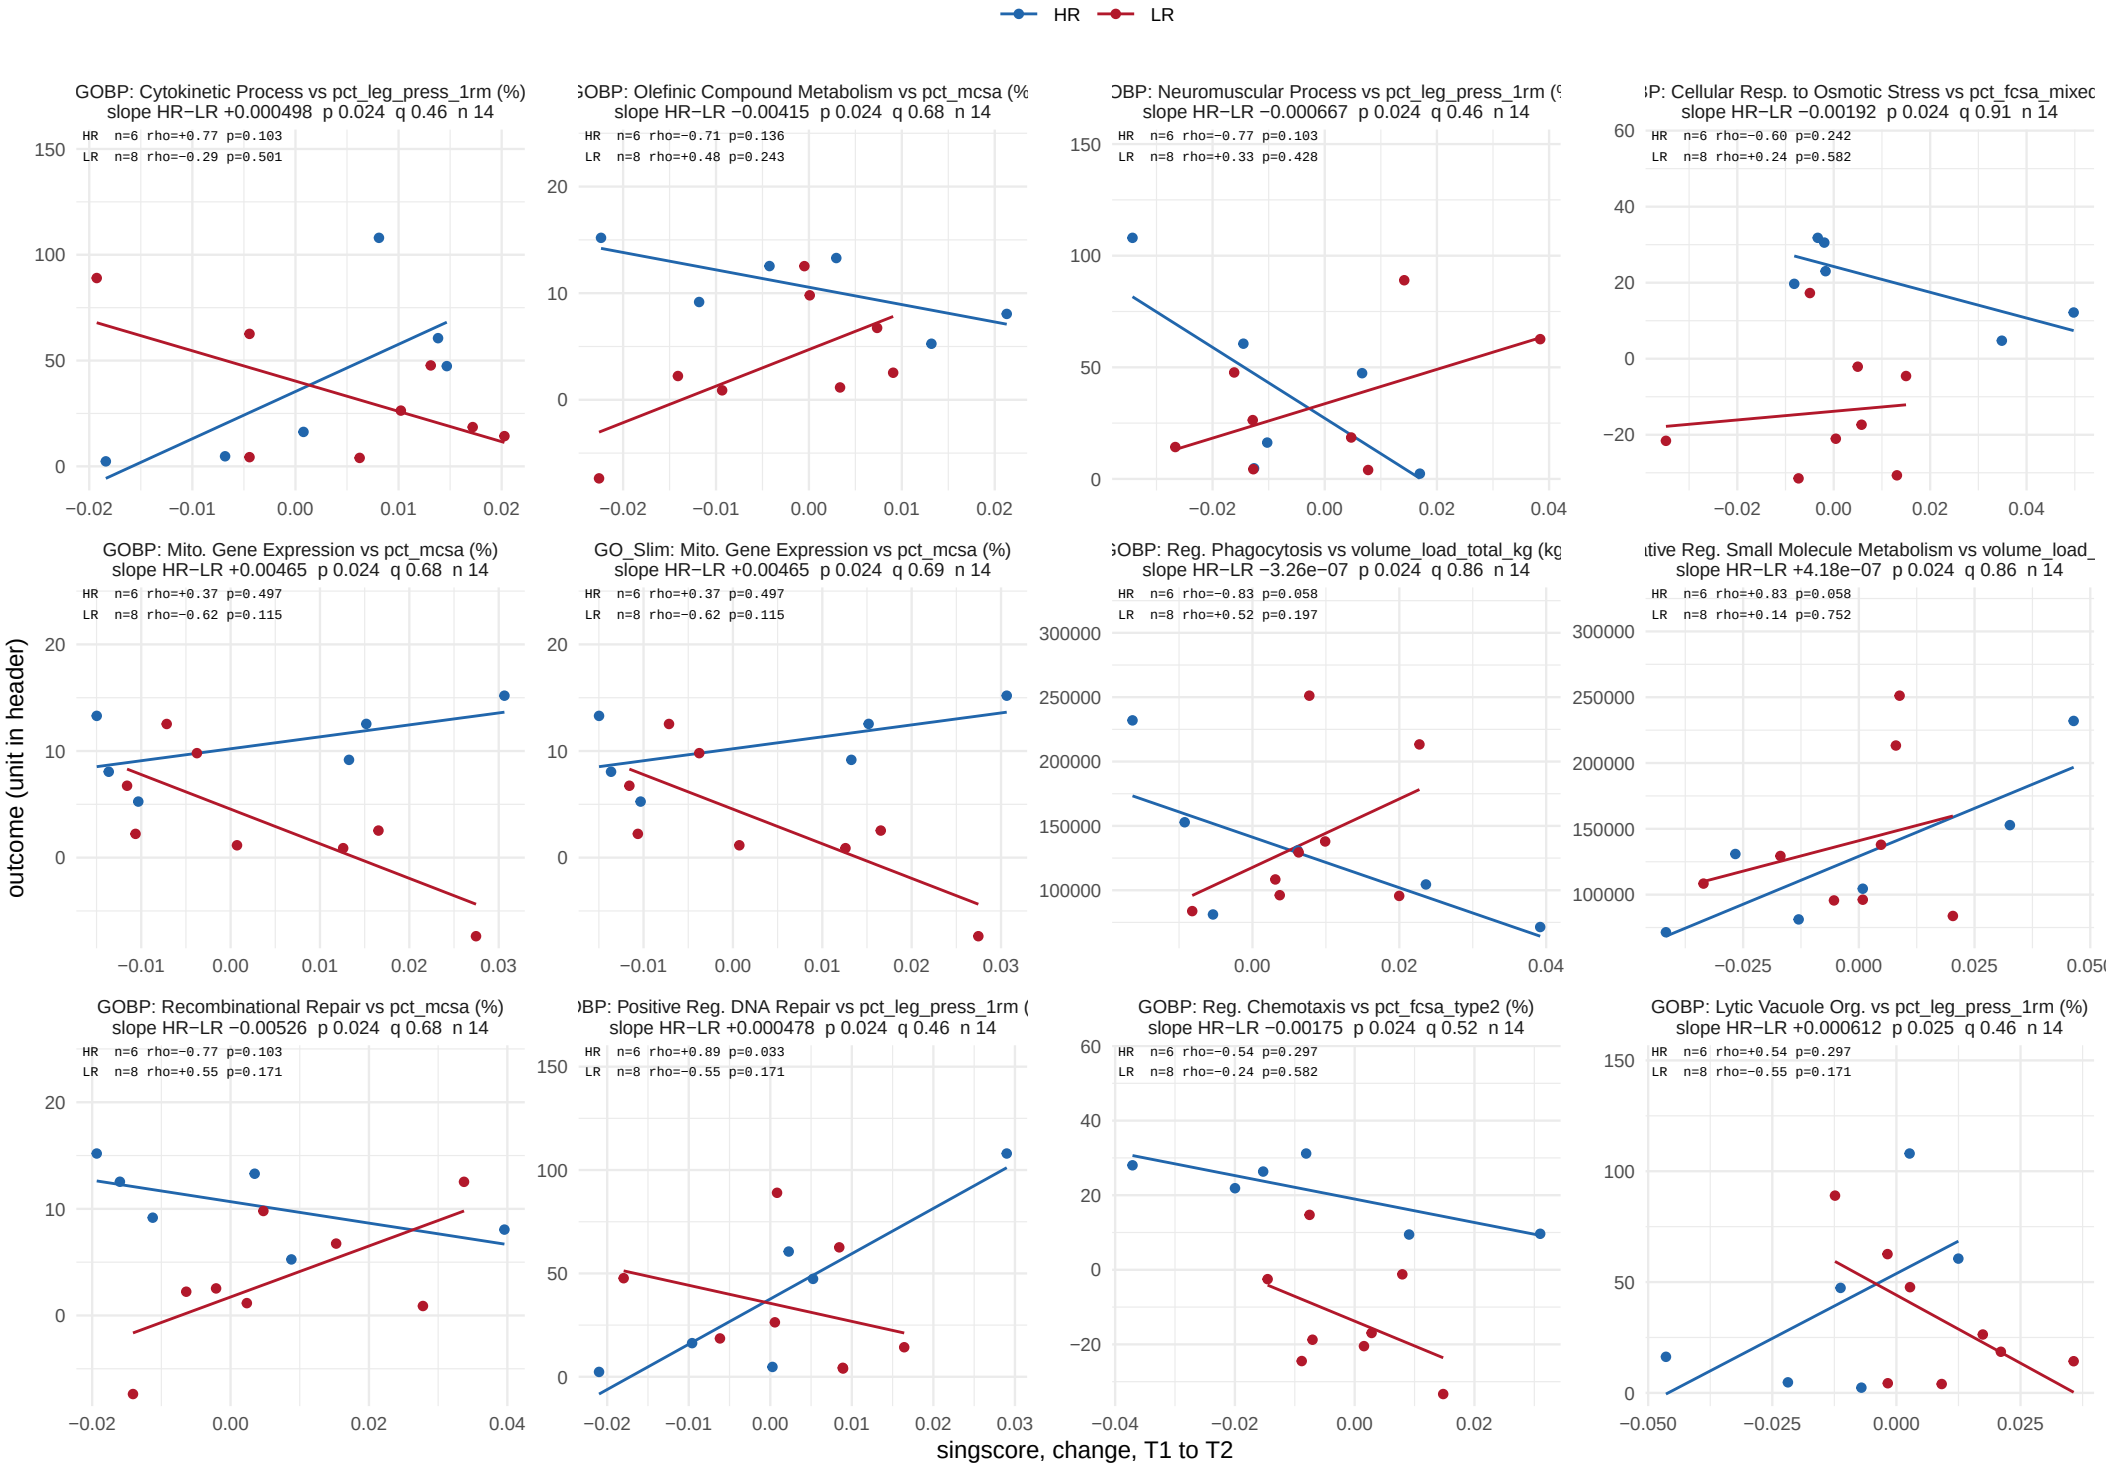


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, training window


506 of 11024 feature−outcome pairs at p < 0.05, 18 at BH < 0.05. Page 22 of 43.

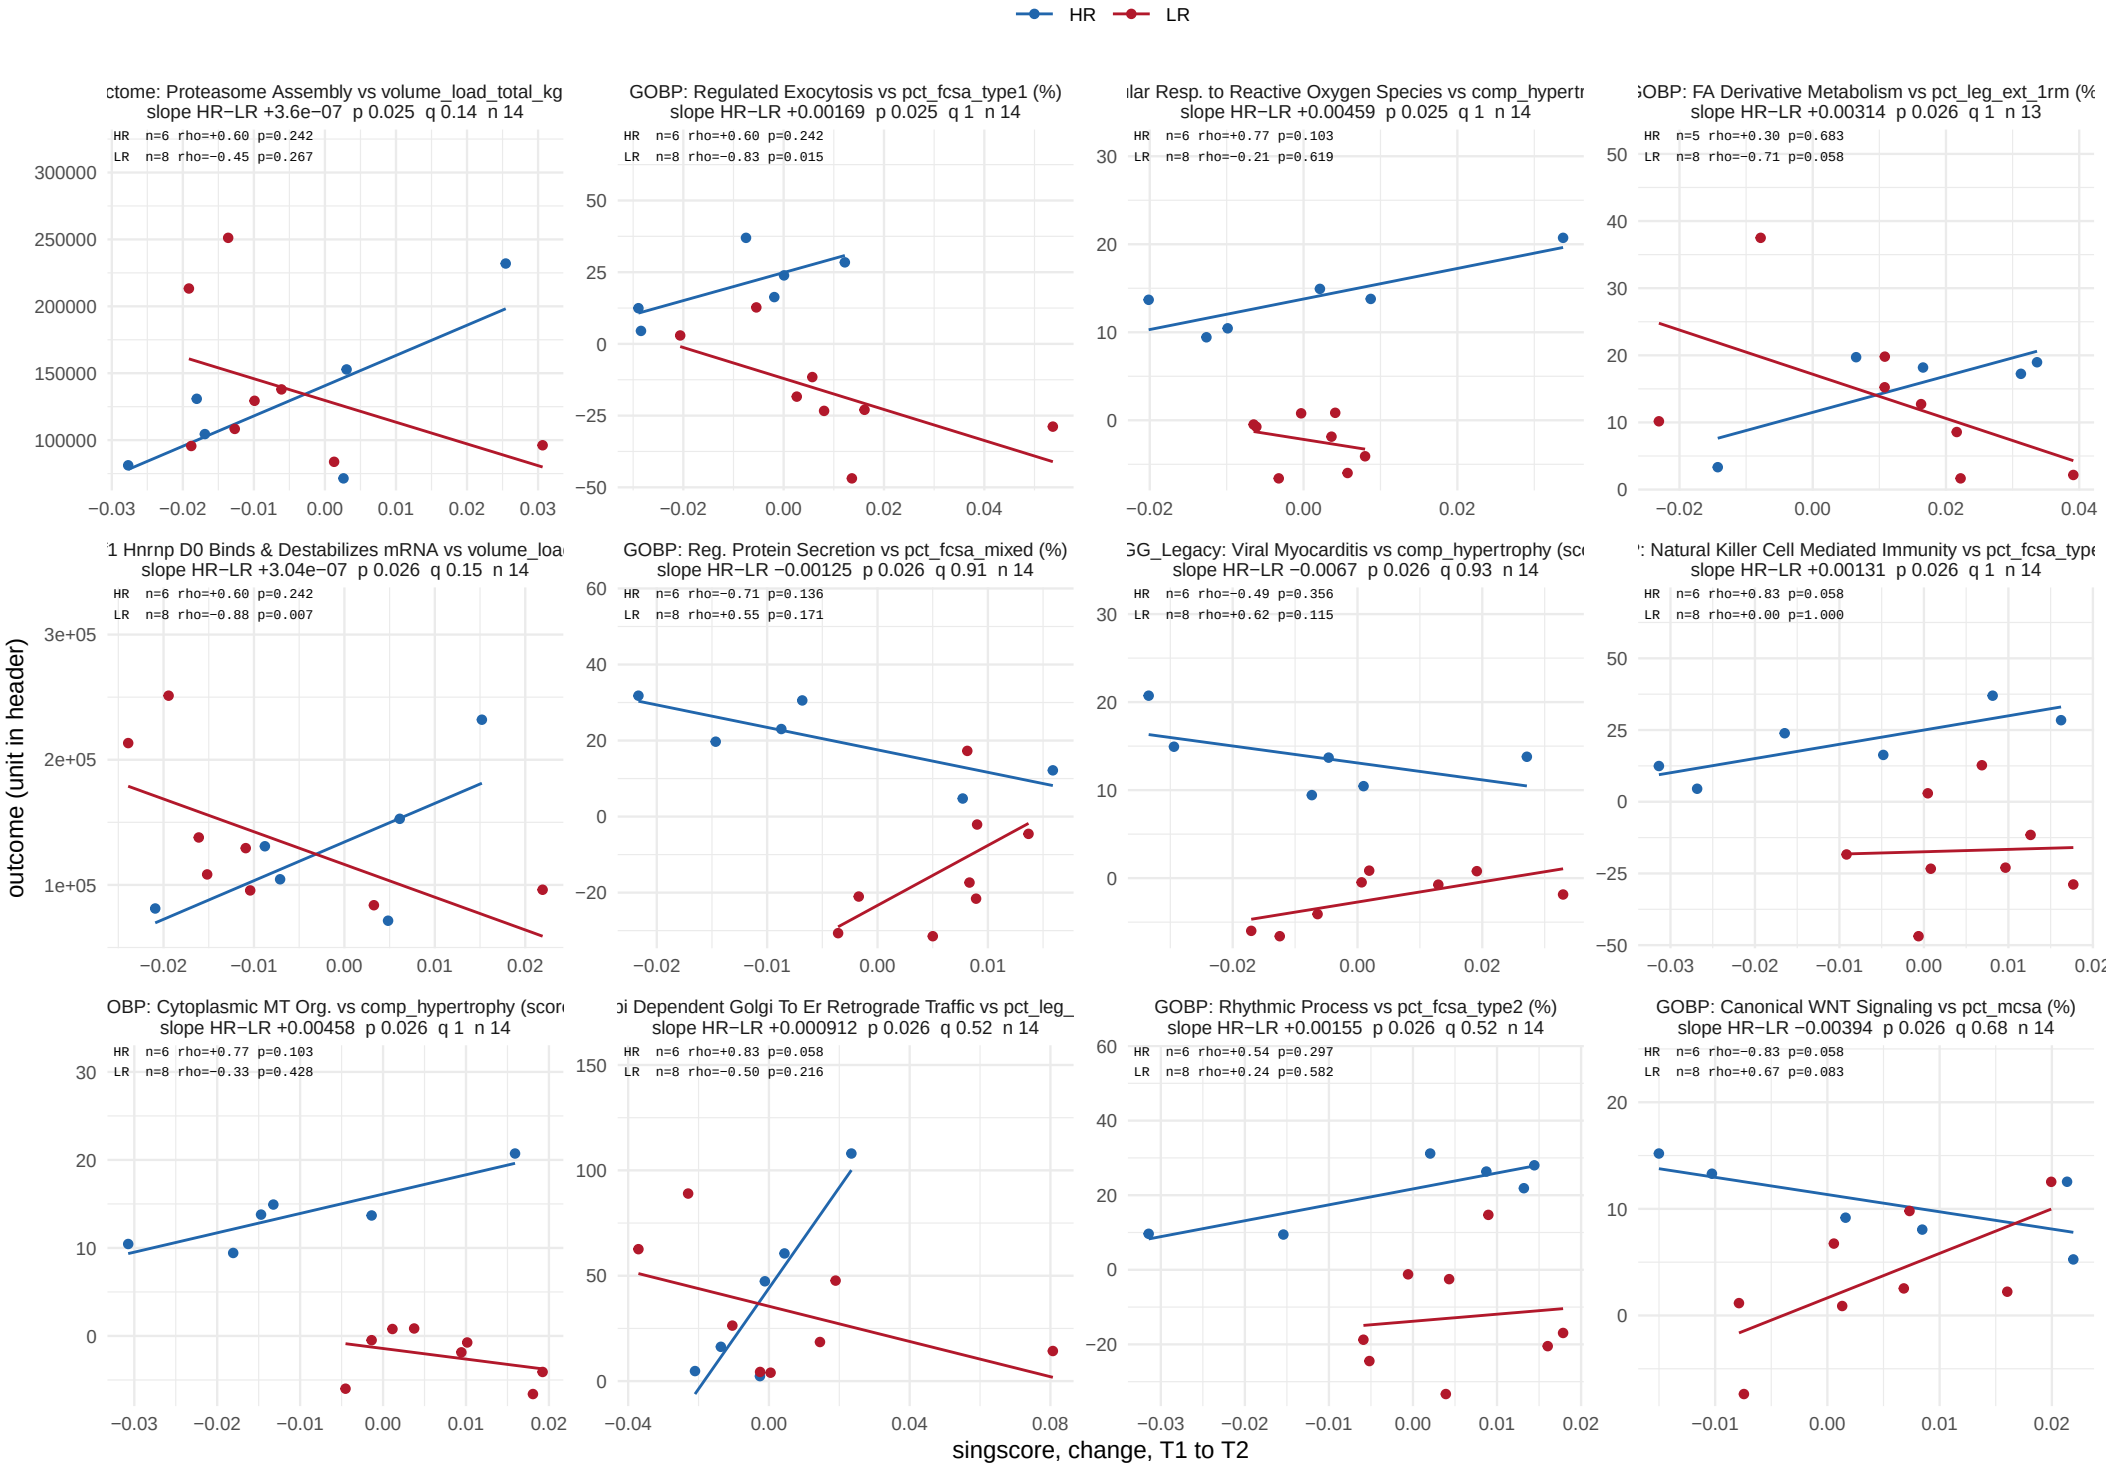


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, training window


506 of 11024 feature−outcome pairs at p < 0.05, 18 at BH < 0.05. Page 23 of 43.

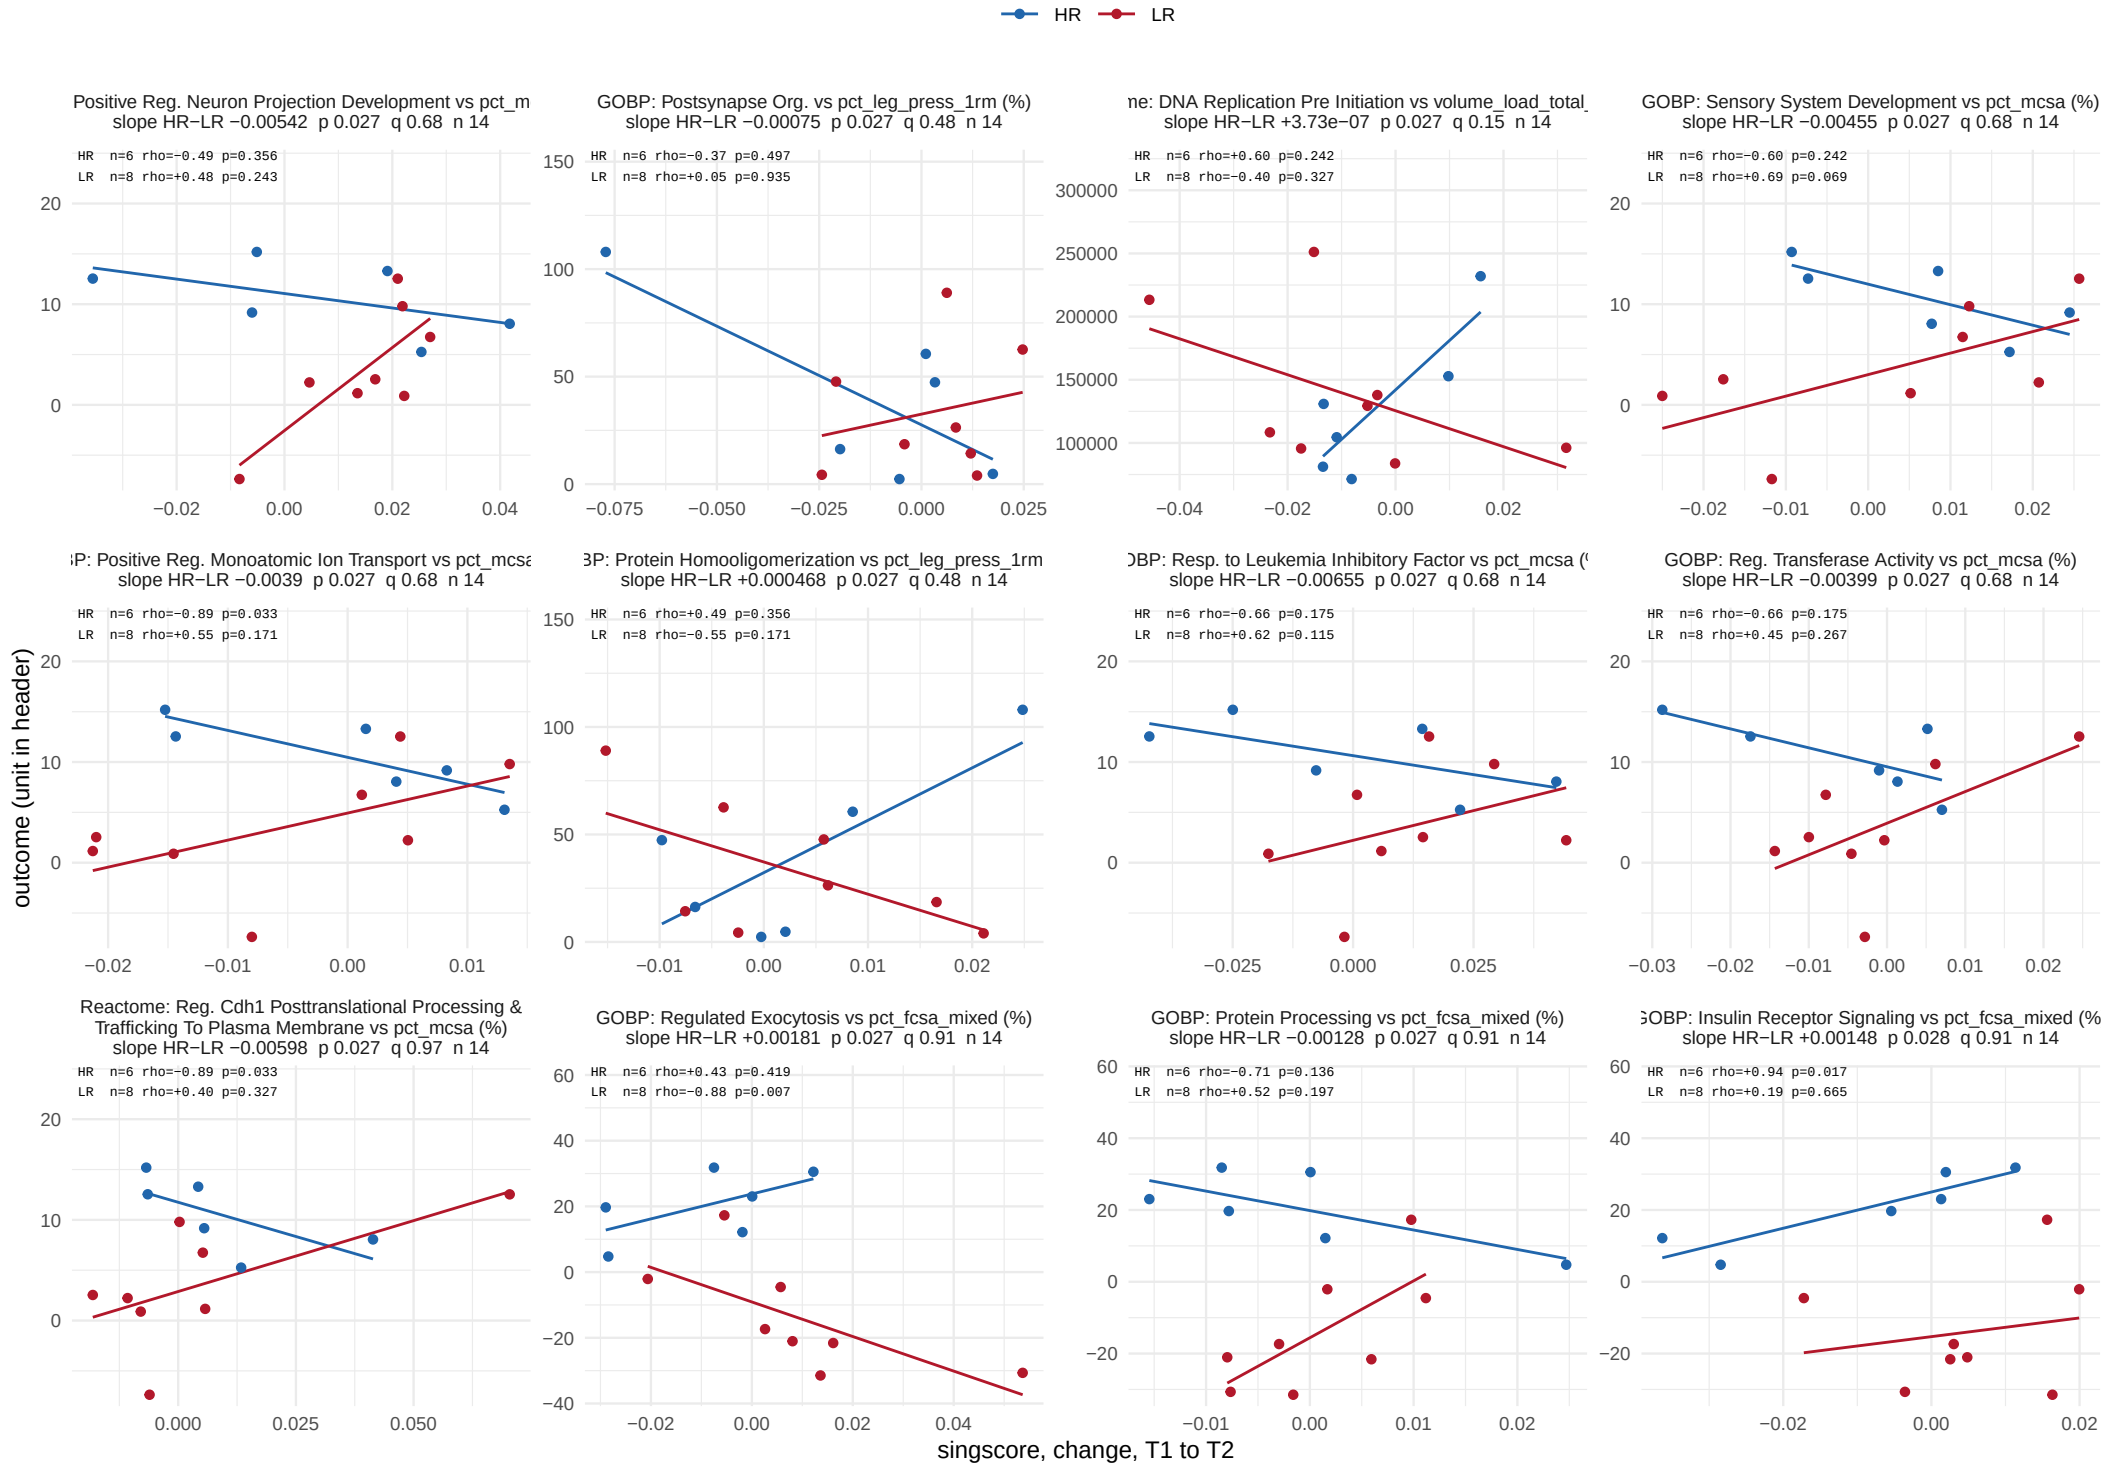


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, training window


506 of 11024 feature−outcome pairs at p < 0.05, 18 at BH < 0.05. Page 24 of 43.

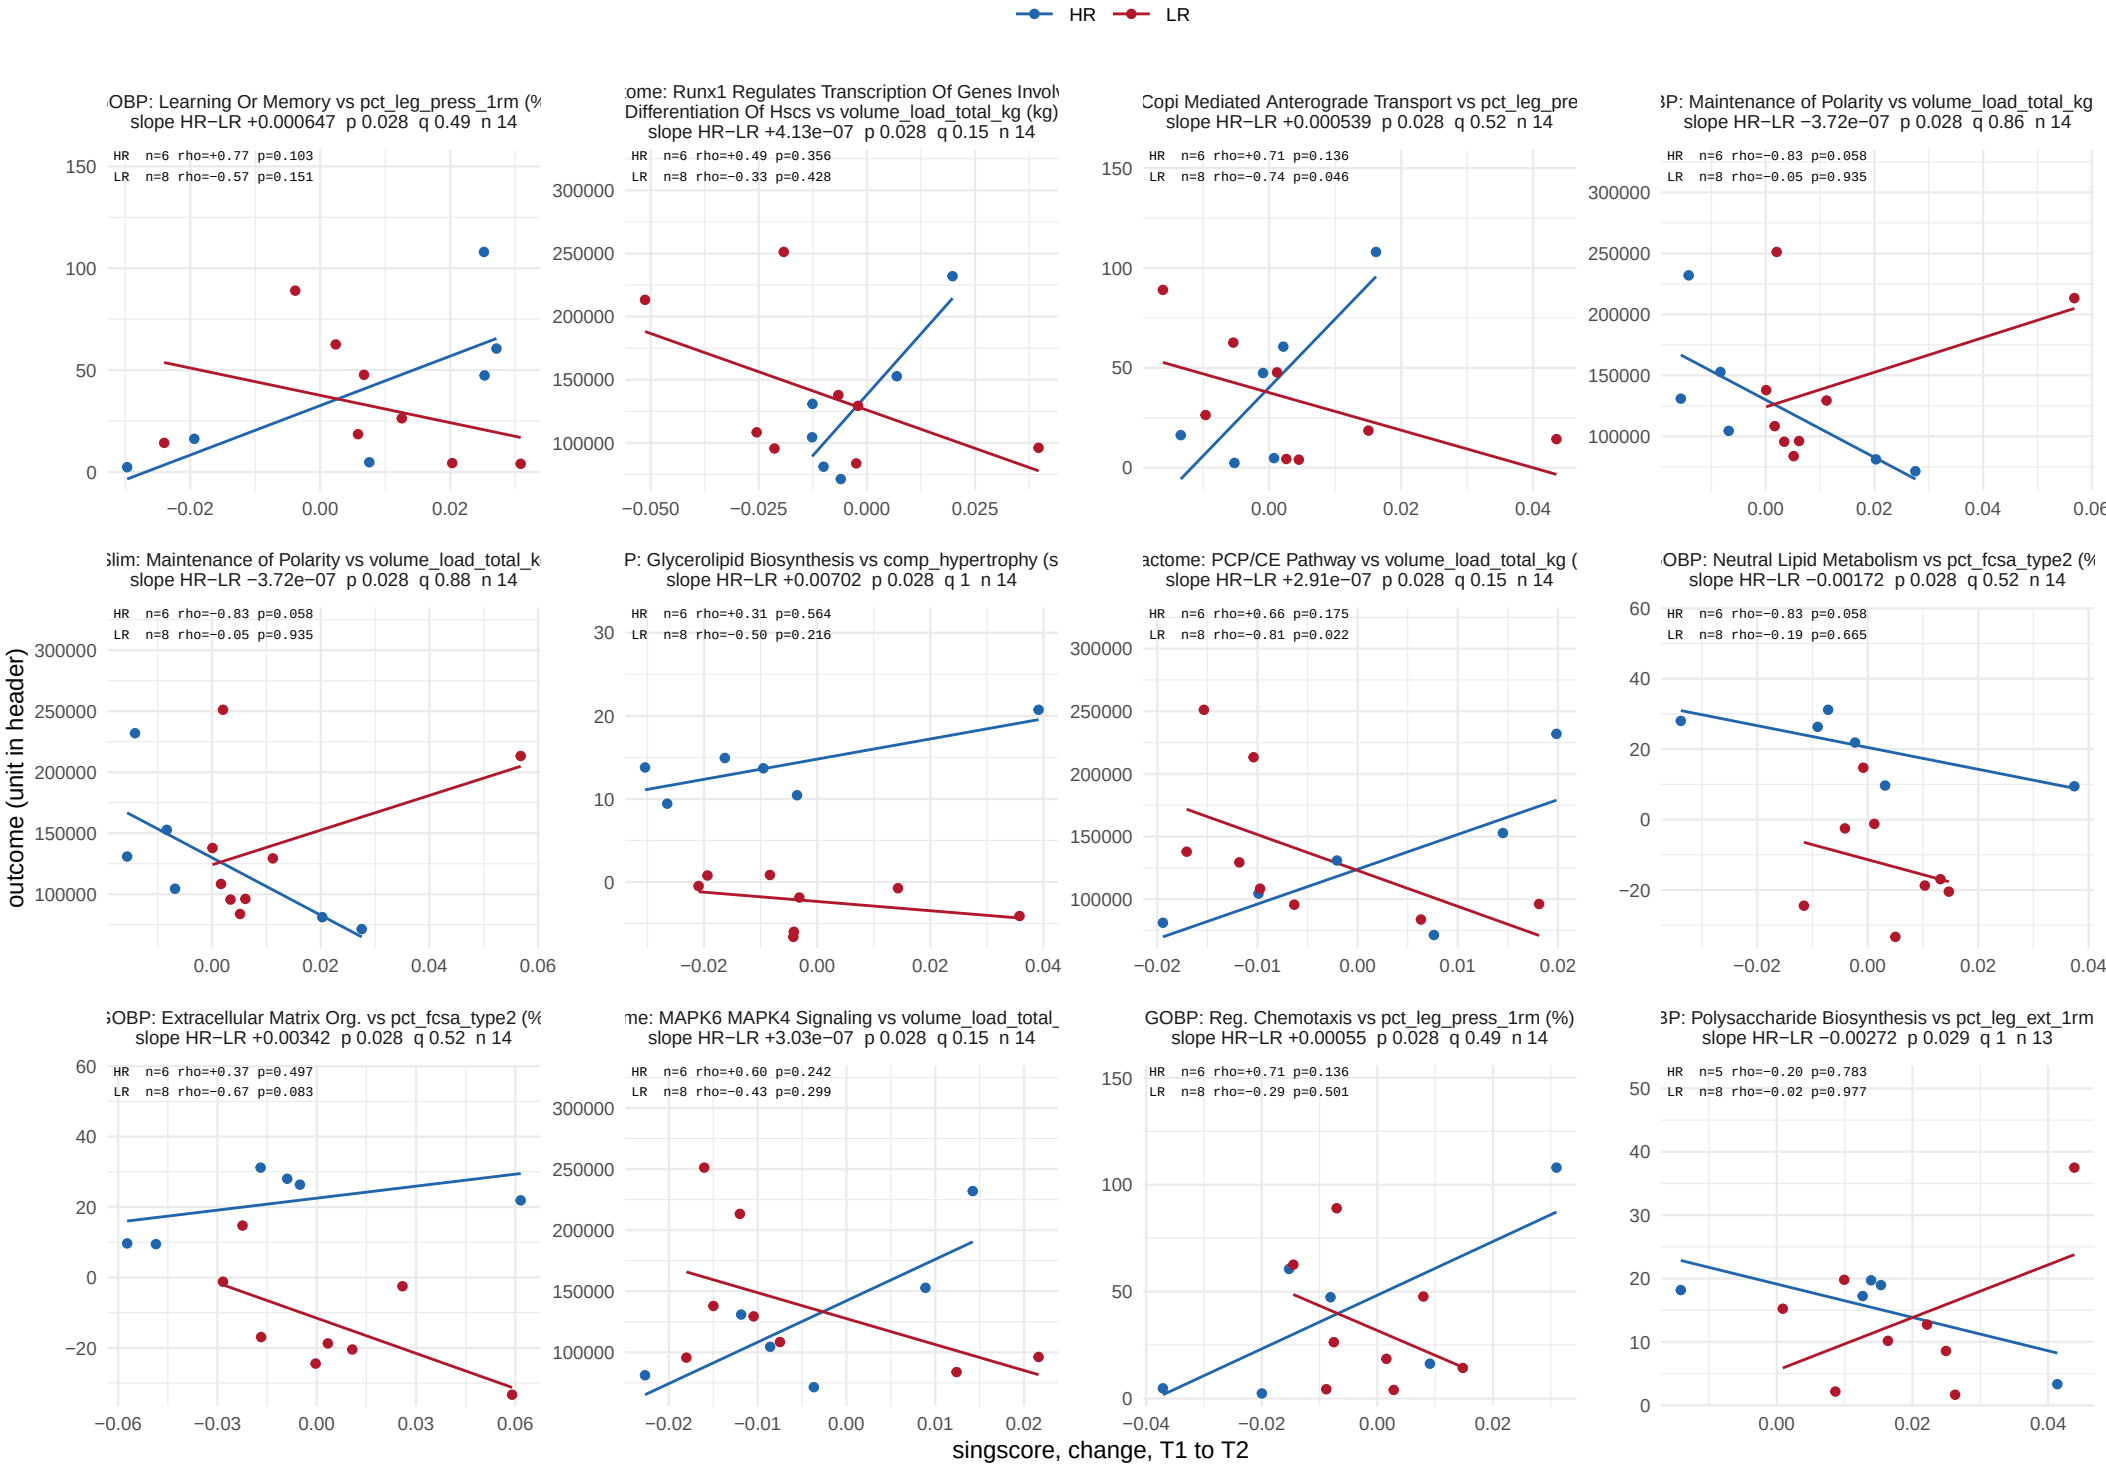


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, training window


506 of 11024 feature−outcome pairs at p < 0.05, 18 at BH < 0.05. Page 25 of 43.

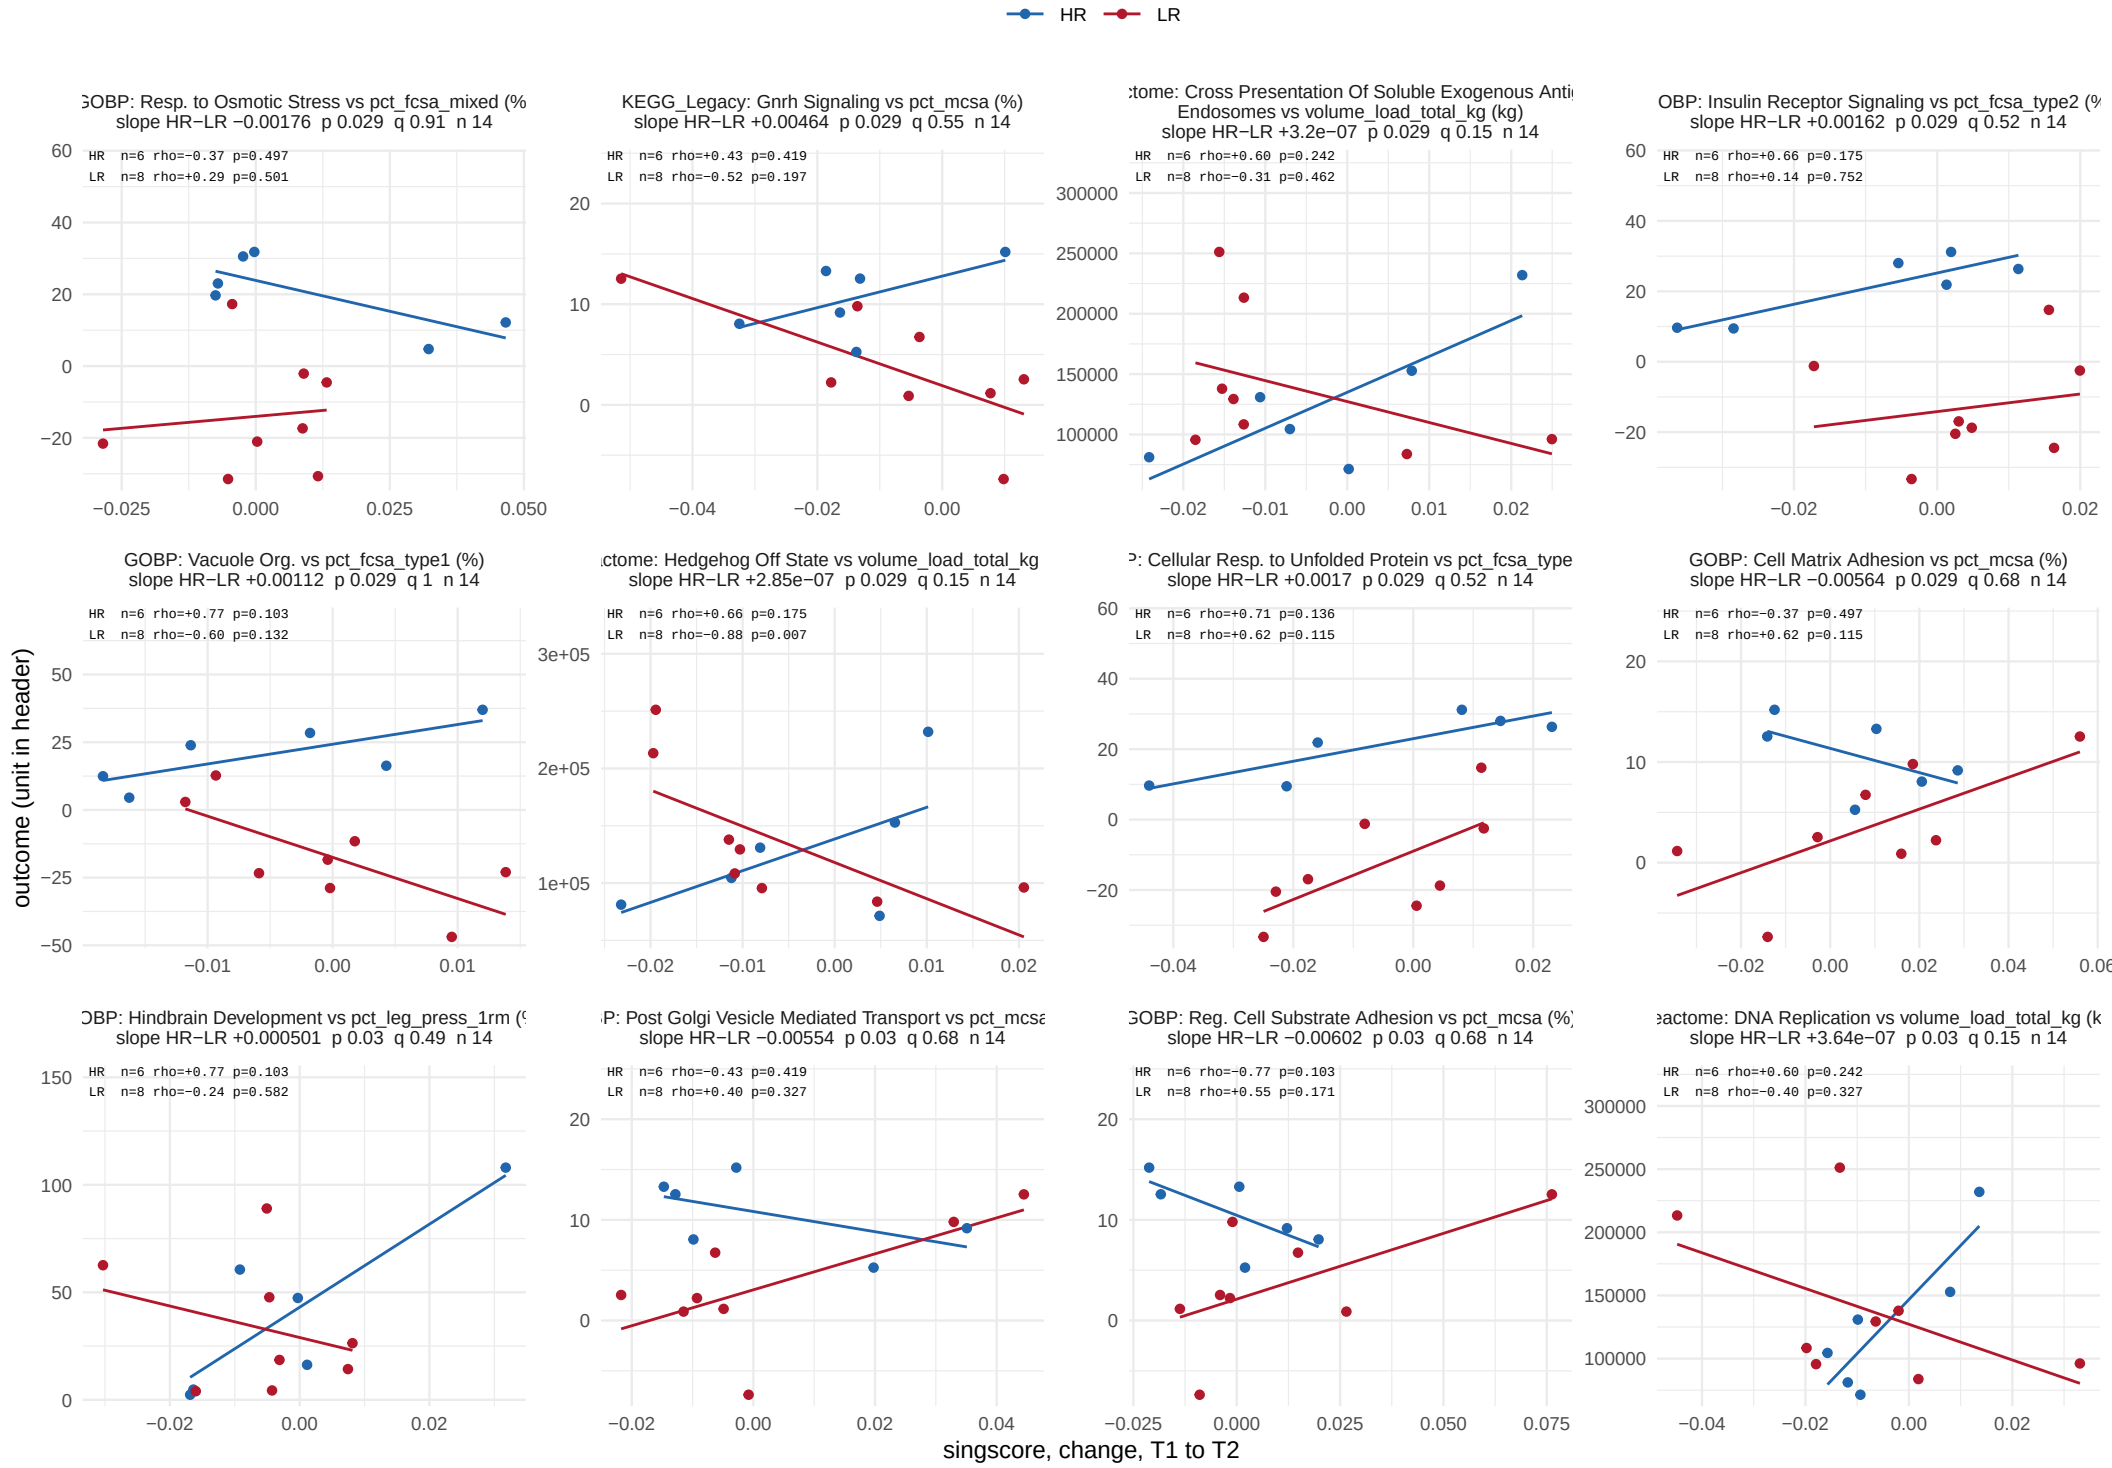


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, training window


506 of 11024 feature−outcome pairs at p < 0.05, 18 at BH < 0.05. Page 26 of 43.

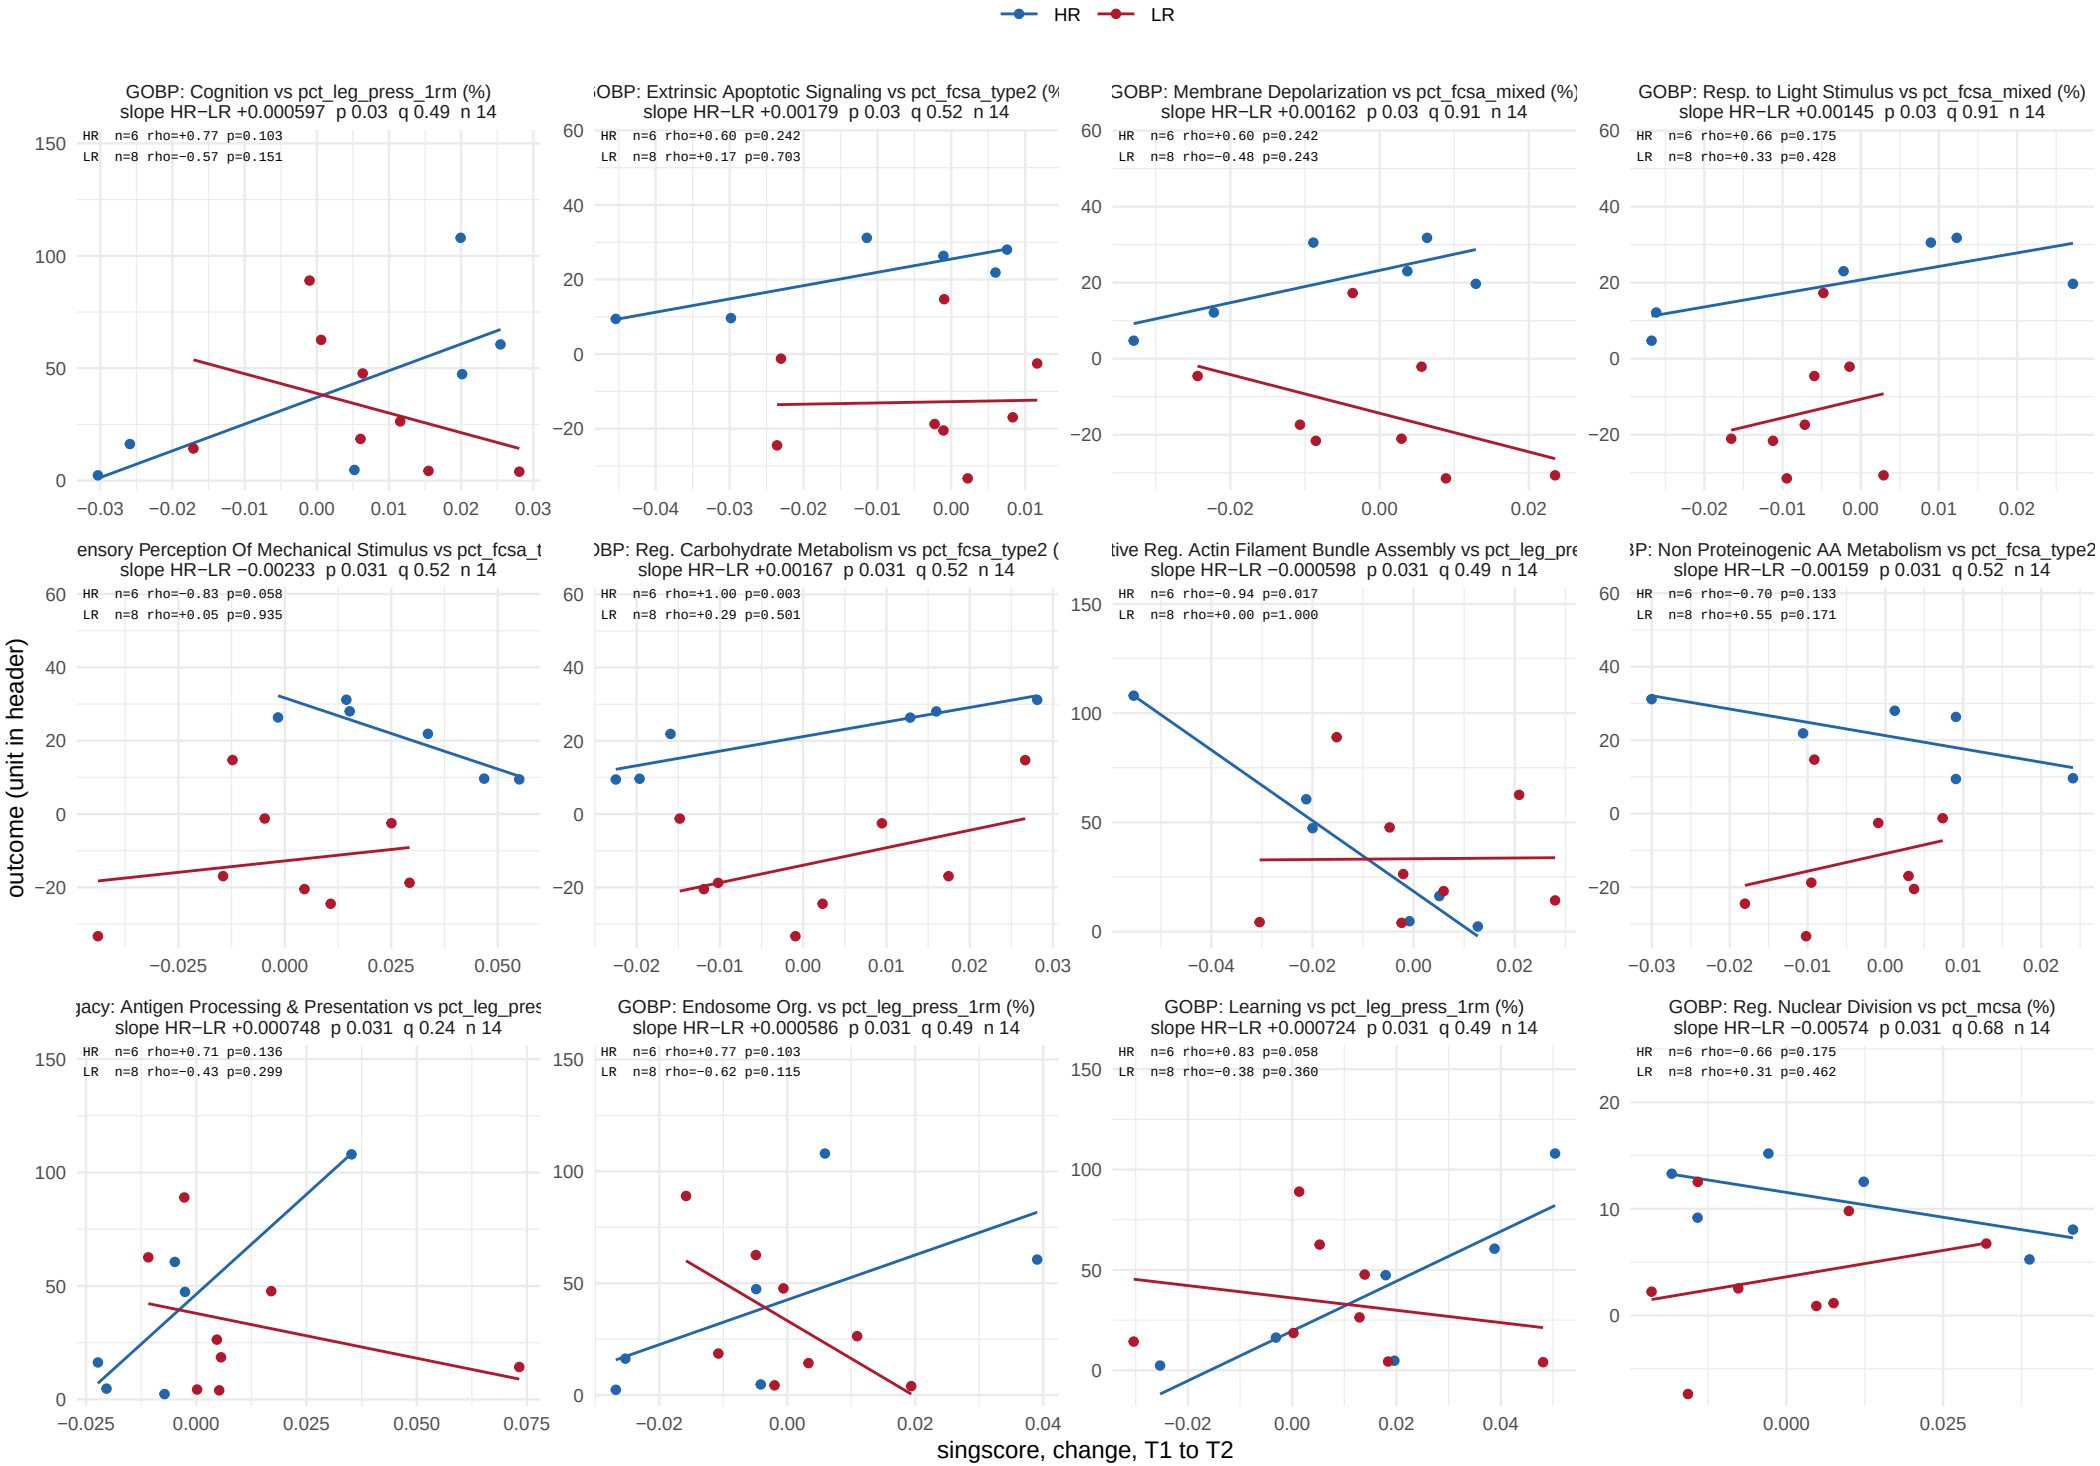


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, training window


506 of 11024 feature−outcome pairs at p < 0.05, 18 at BH < 0.05. Page 27 of 43.

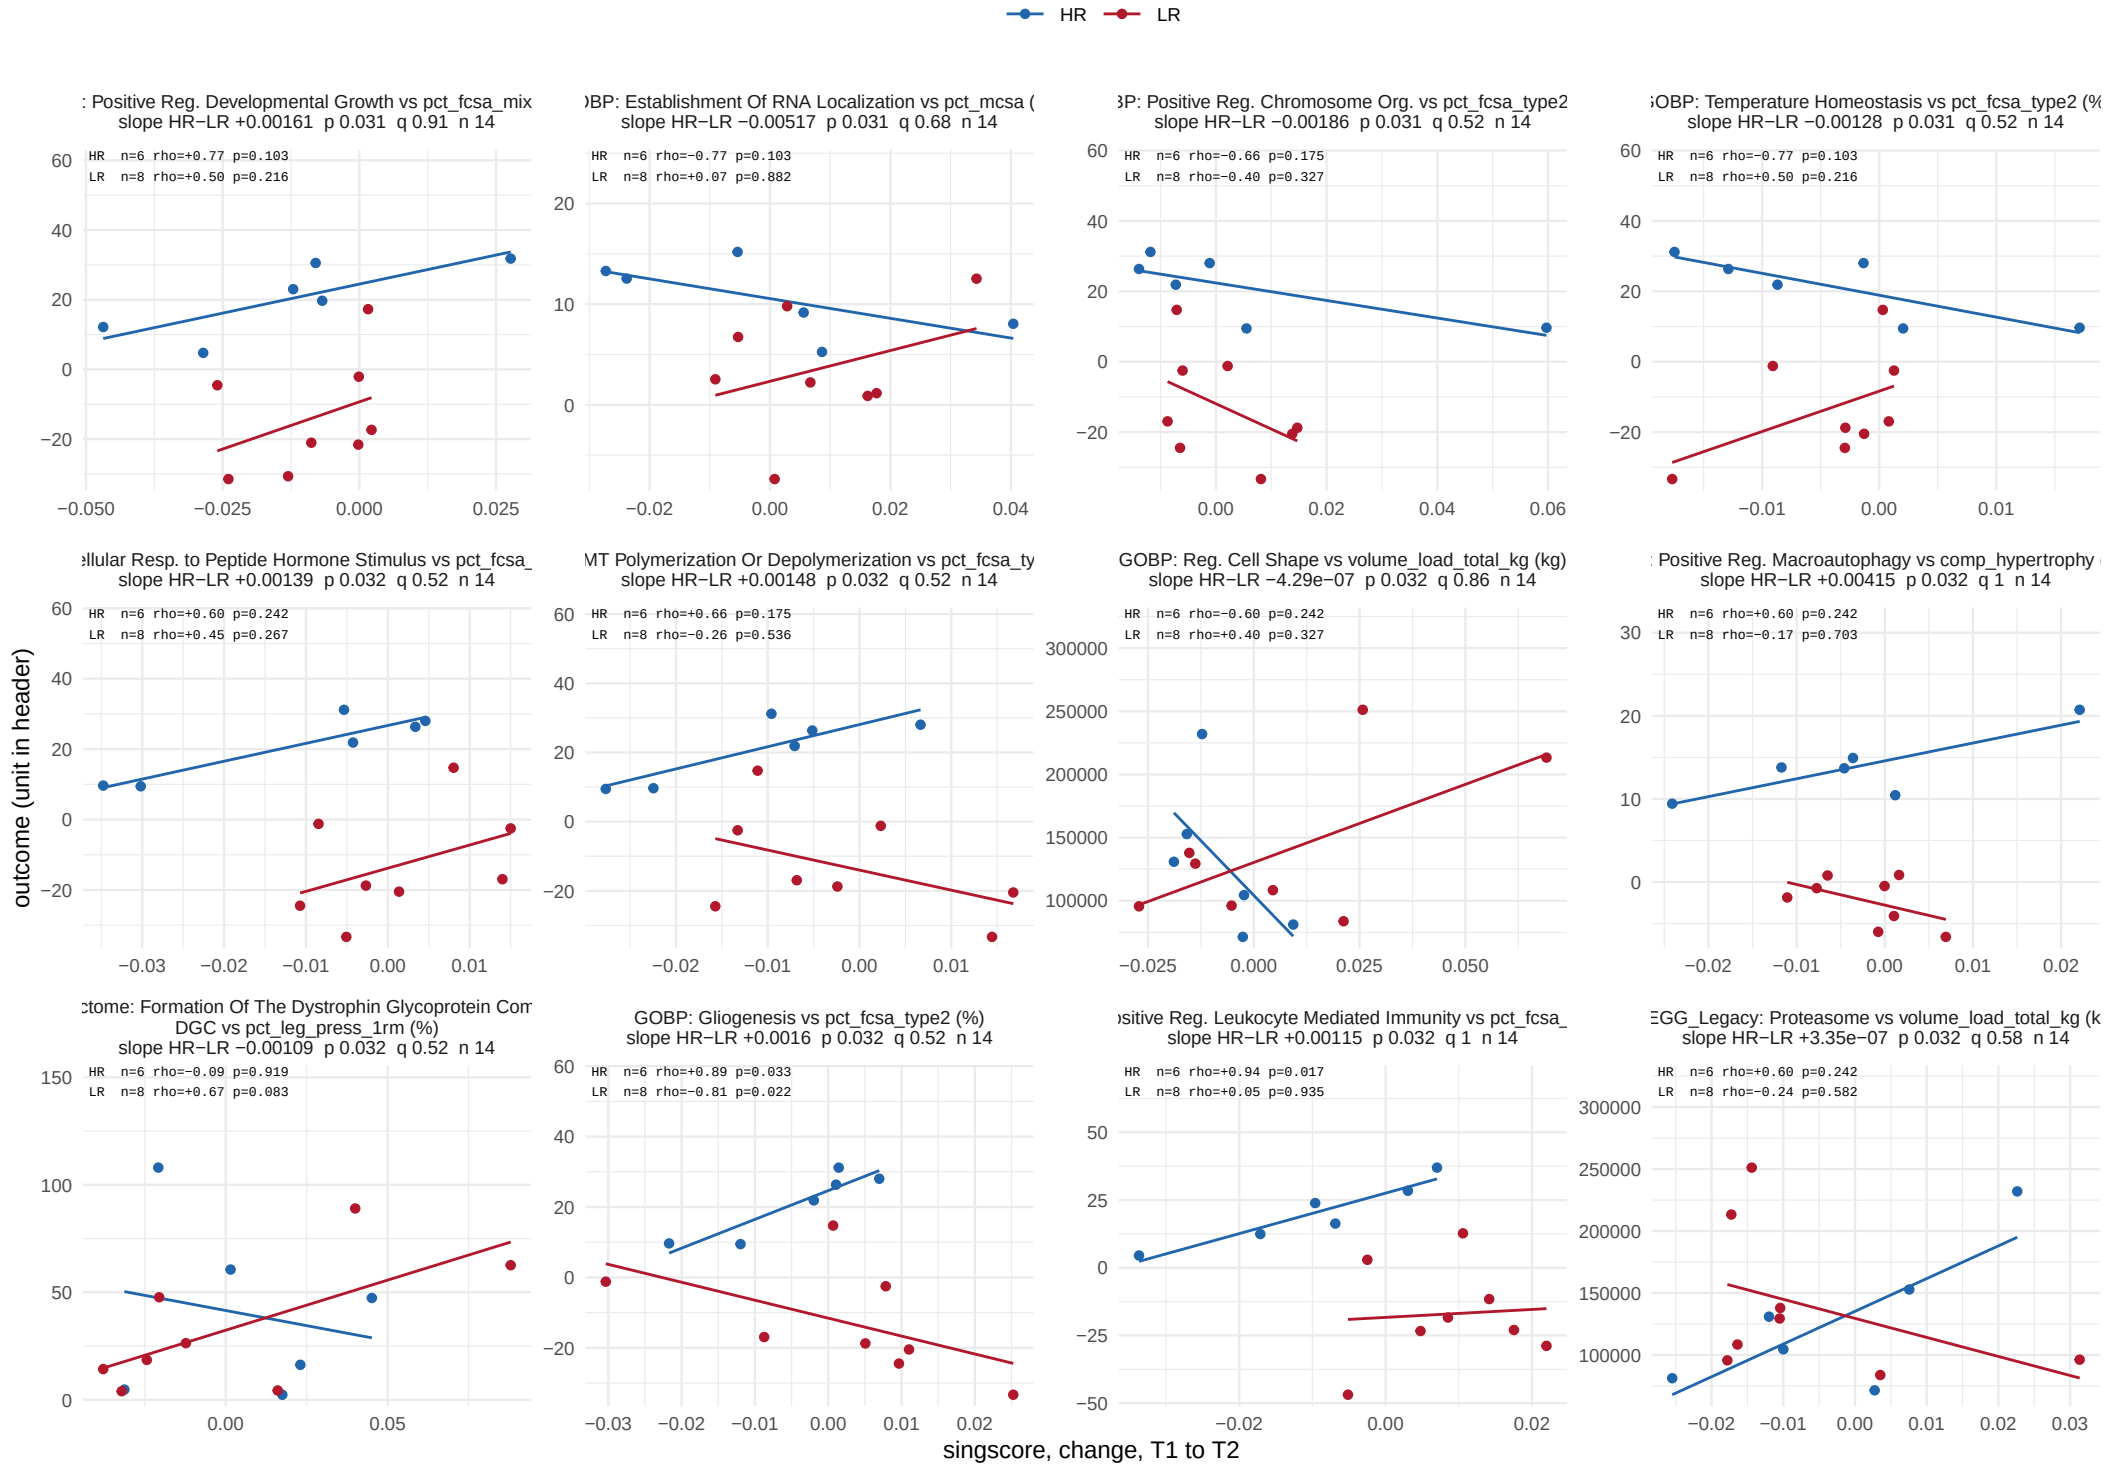


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, training window


506 of 11024 feature−outcome pairs at p < 0.05, 18 at BH < 0.05. Page 28 of 43.

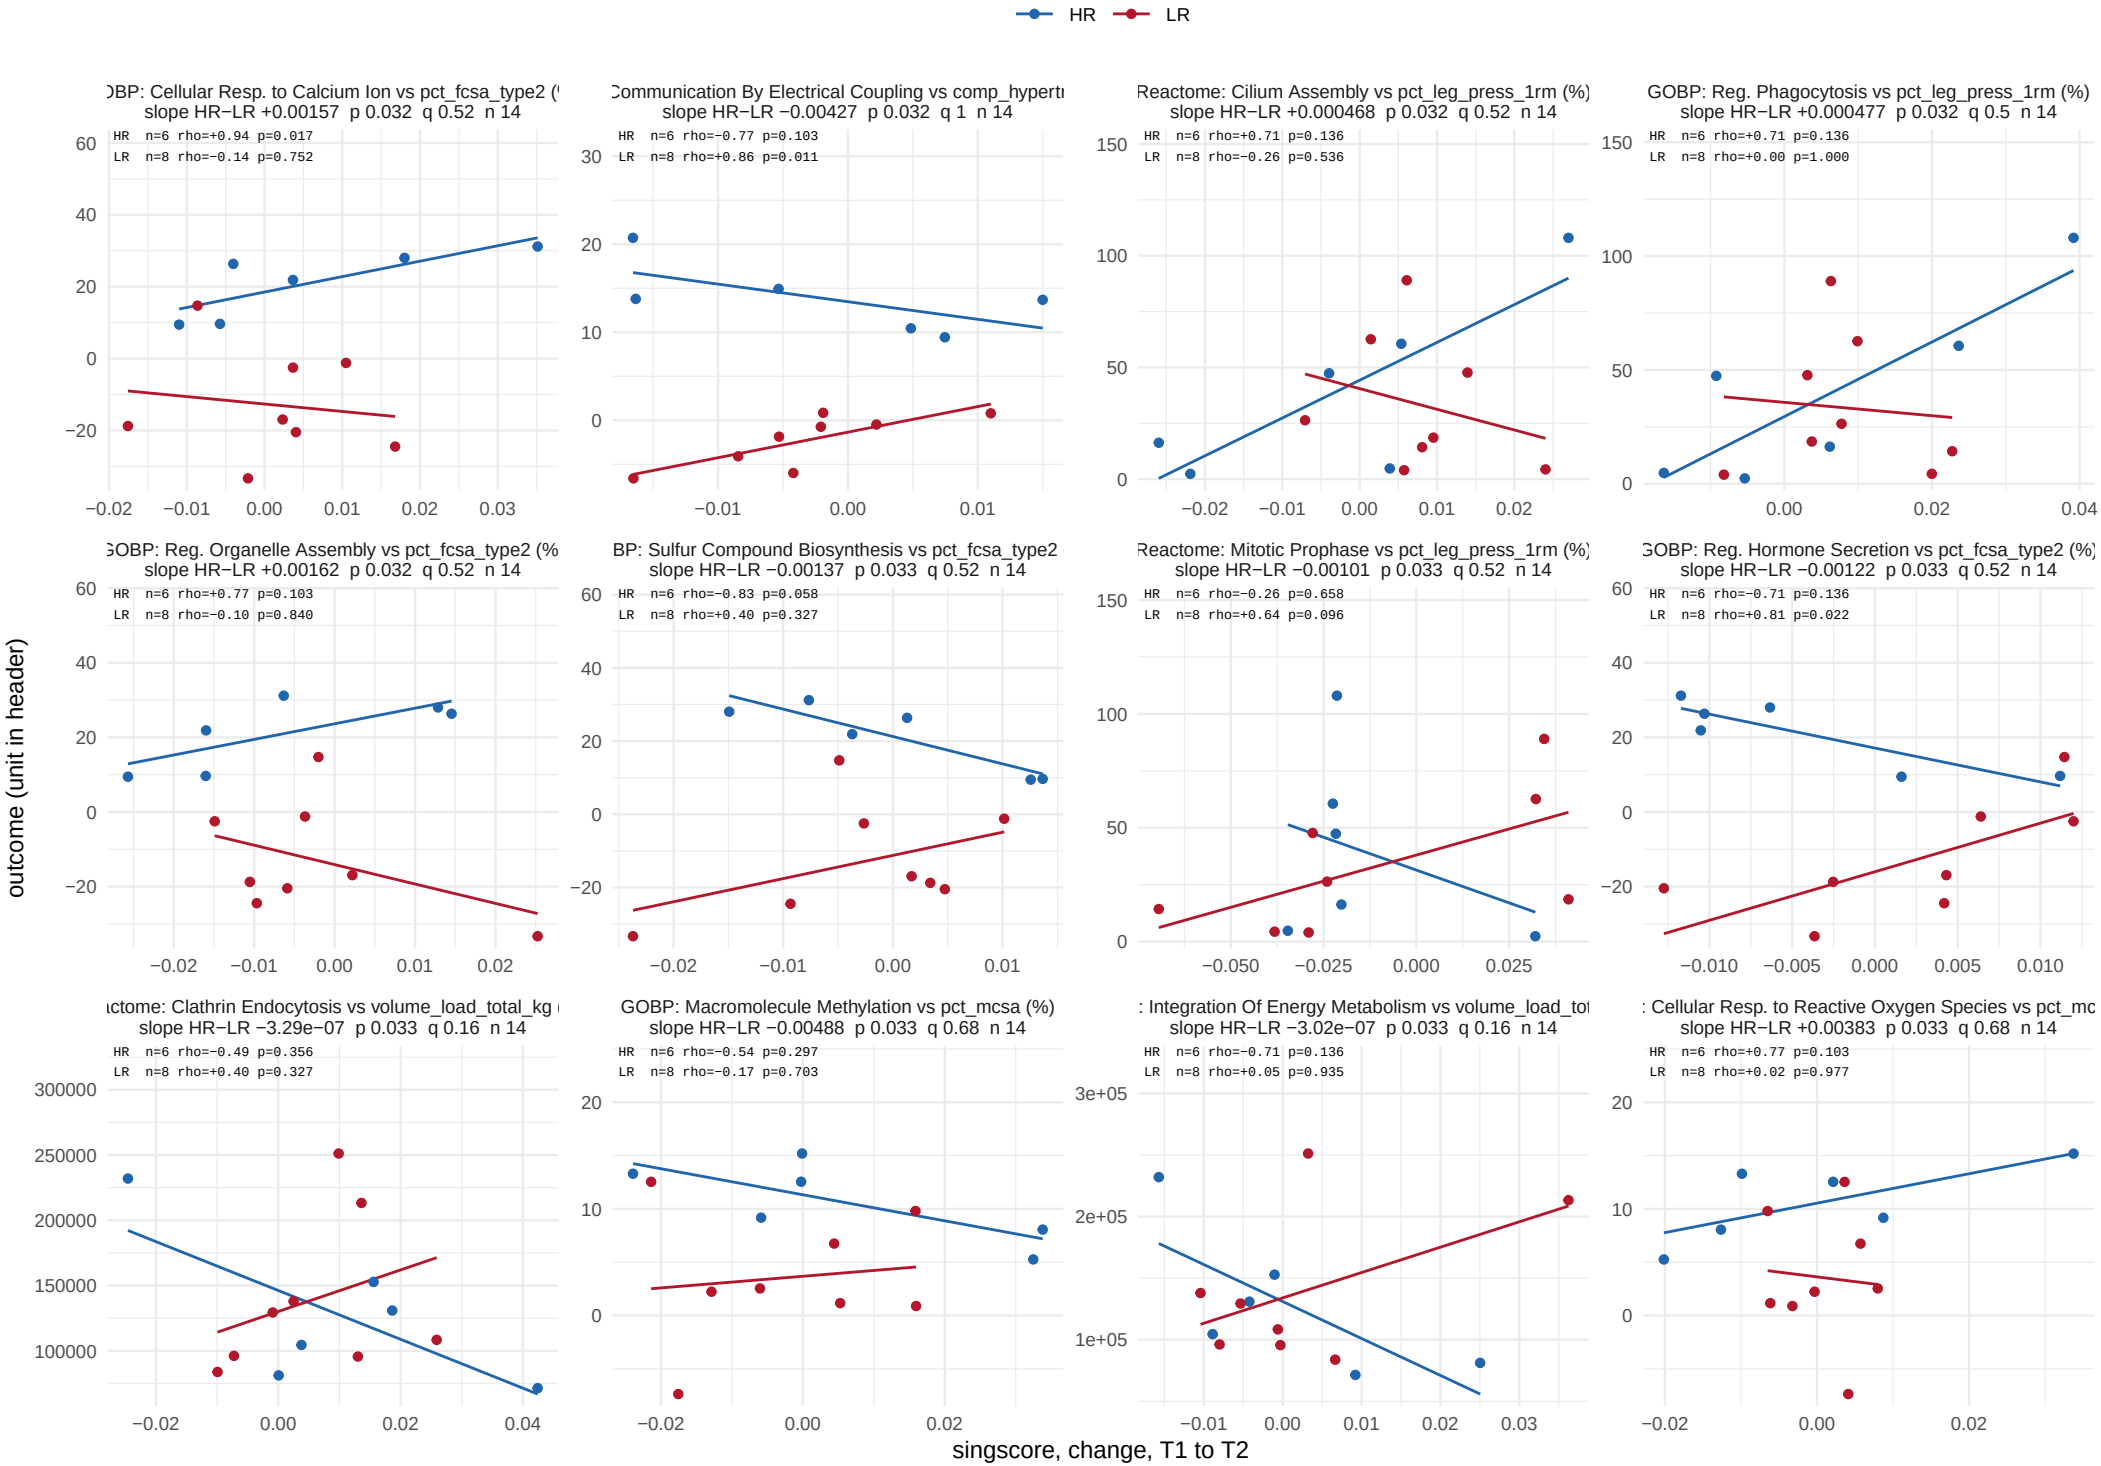


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, training window


506 of 11024 feature−outcome pairs at p < 0.05, 18 at BH < 0.05. Page 29 of 43.

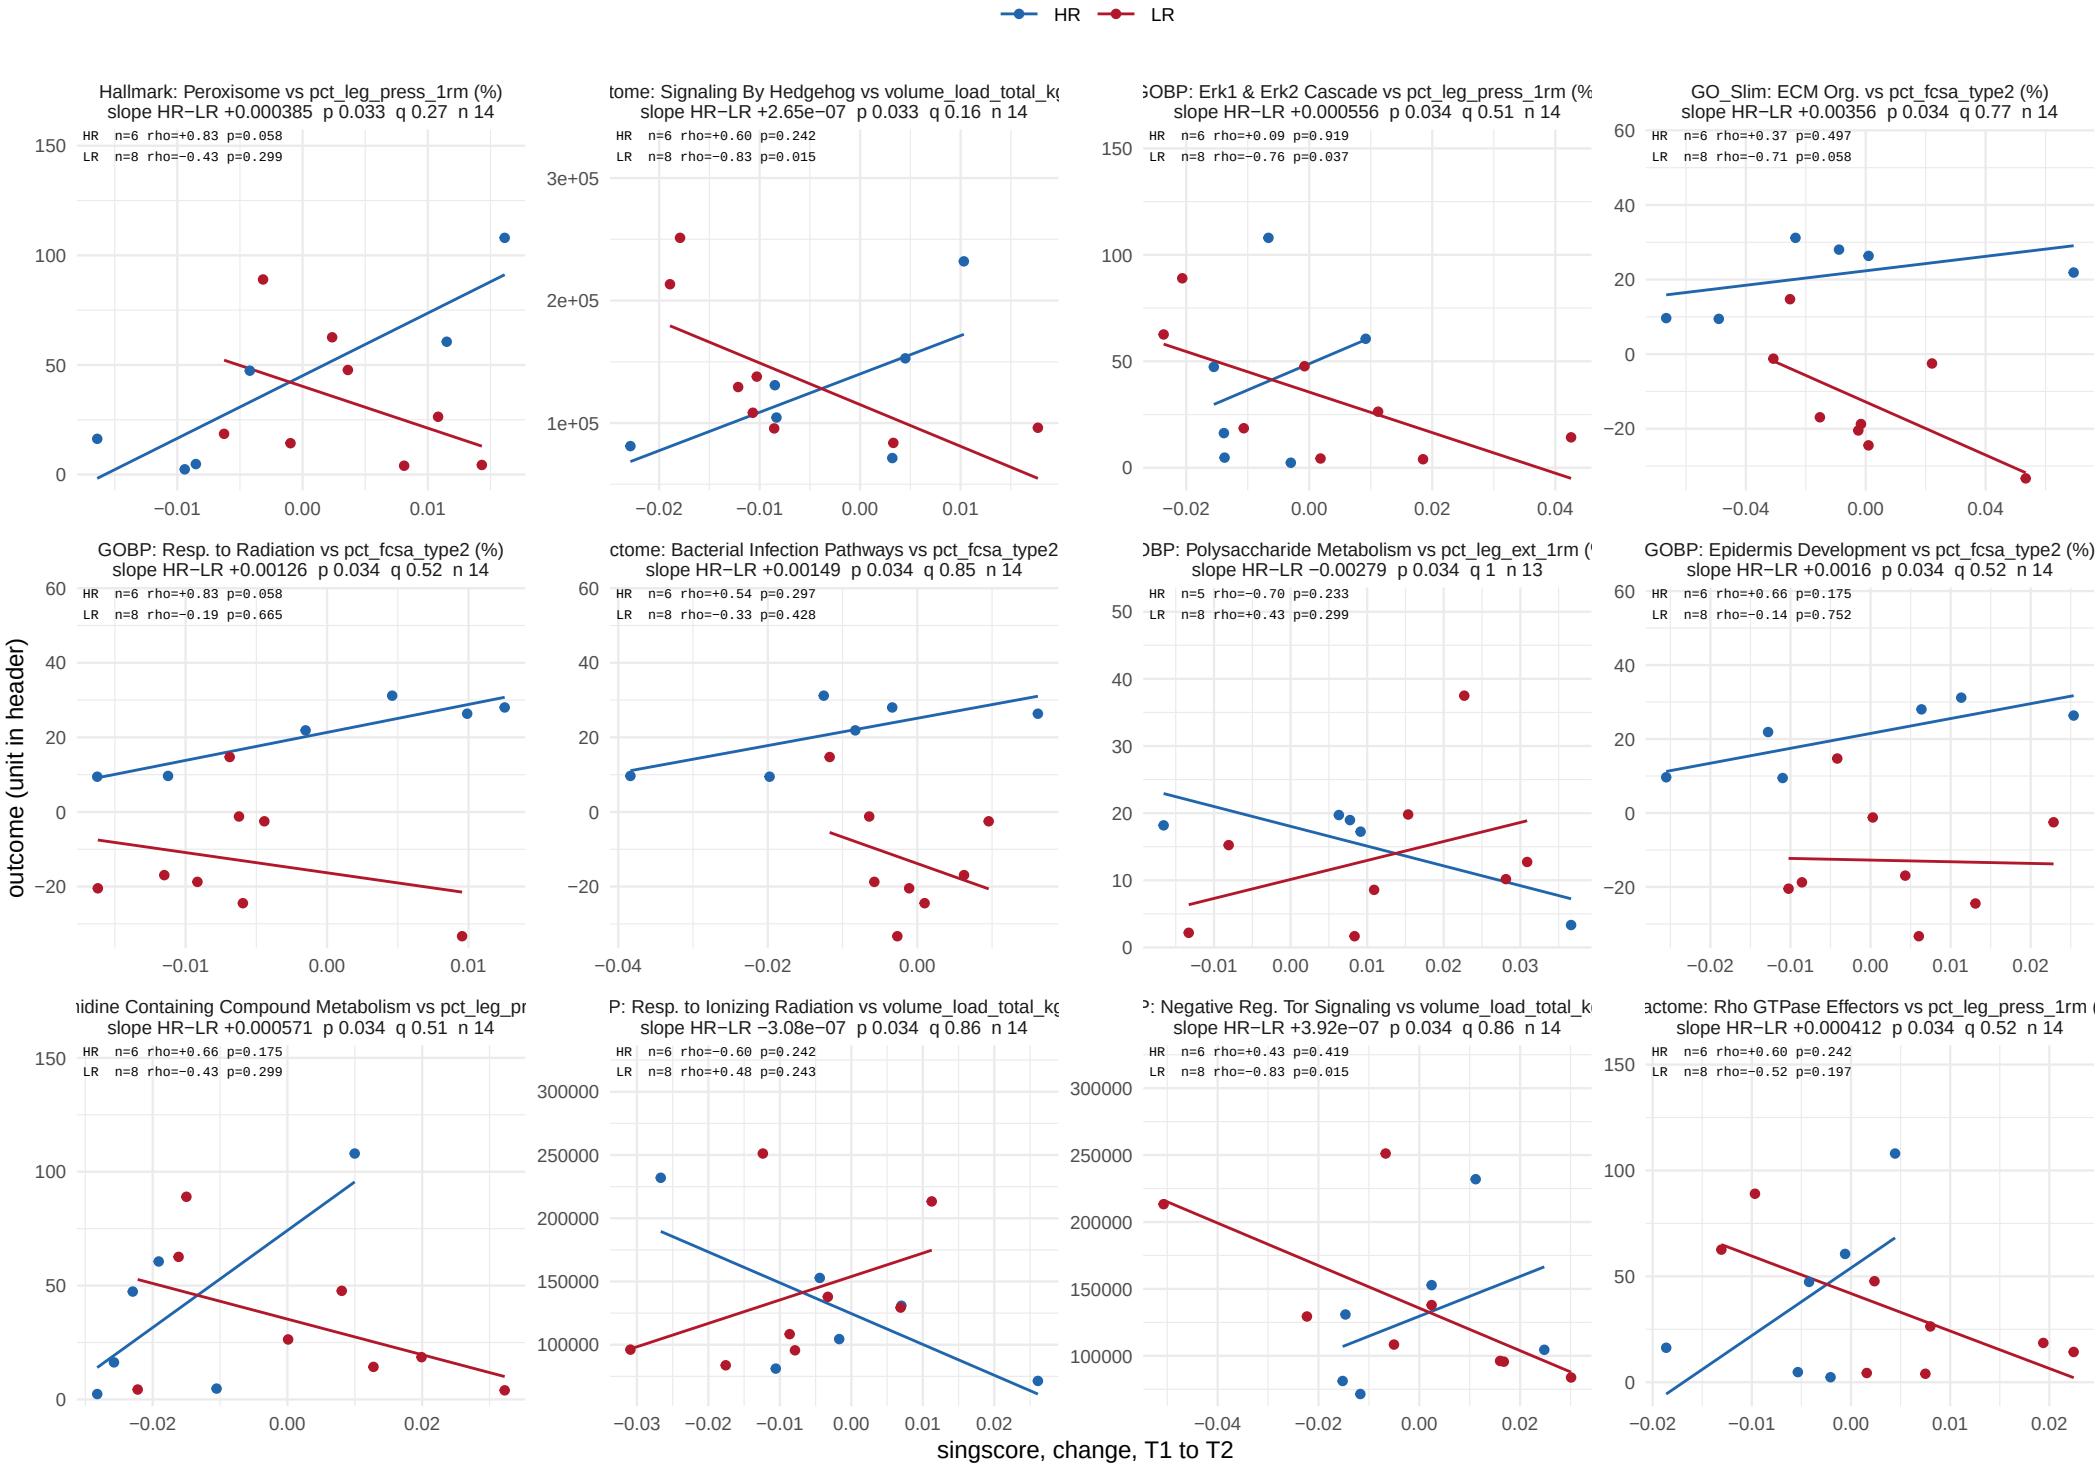


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, training window


506 of 11024 feature−outcome pairs at p < 0.05, 18 at BH < 0.05. Page 30 of 43.

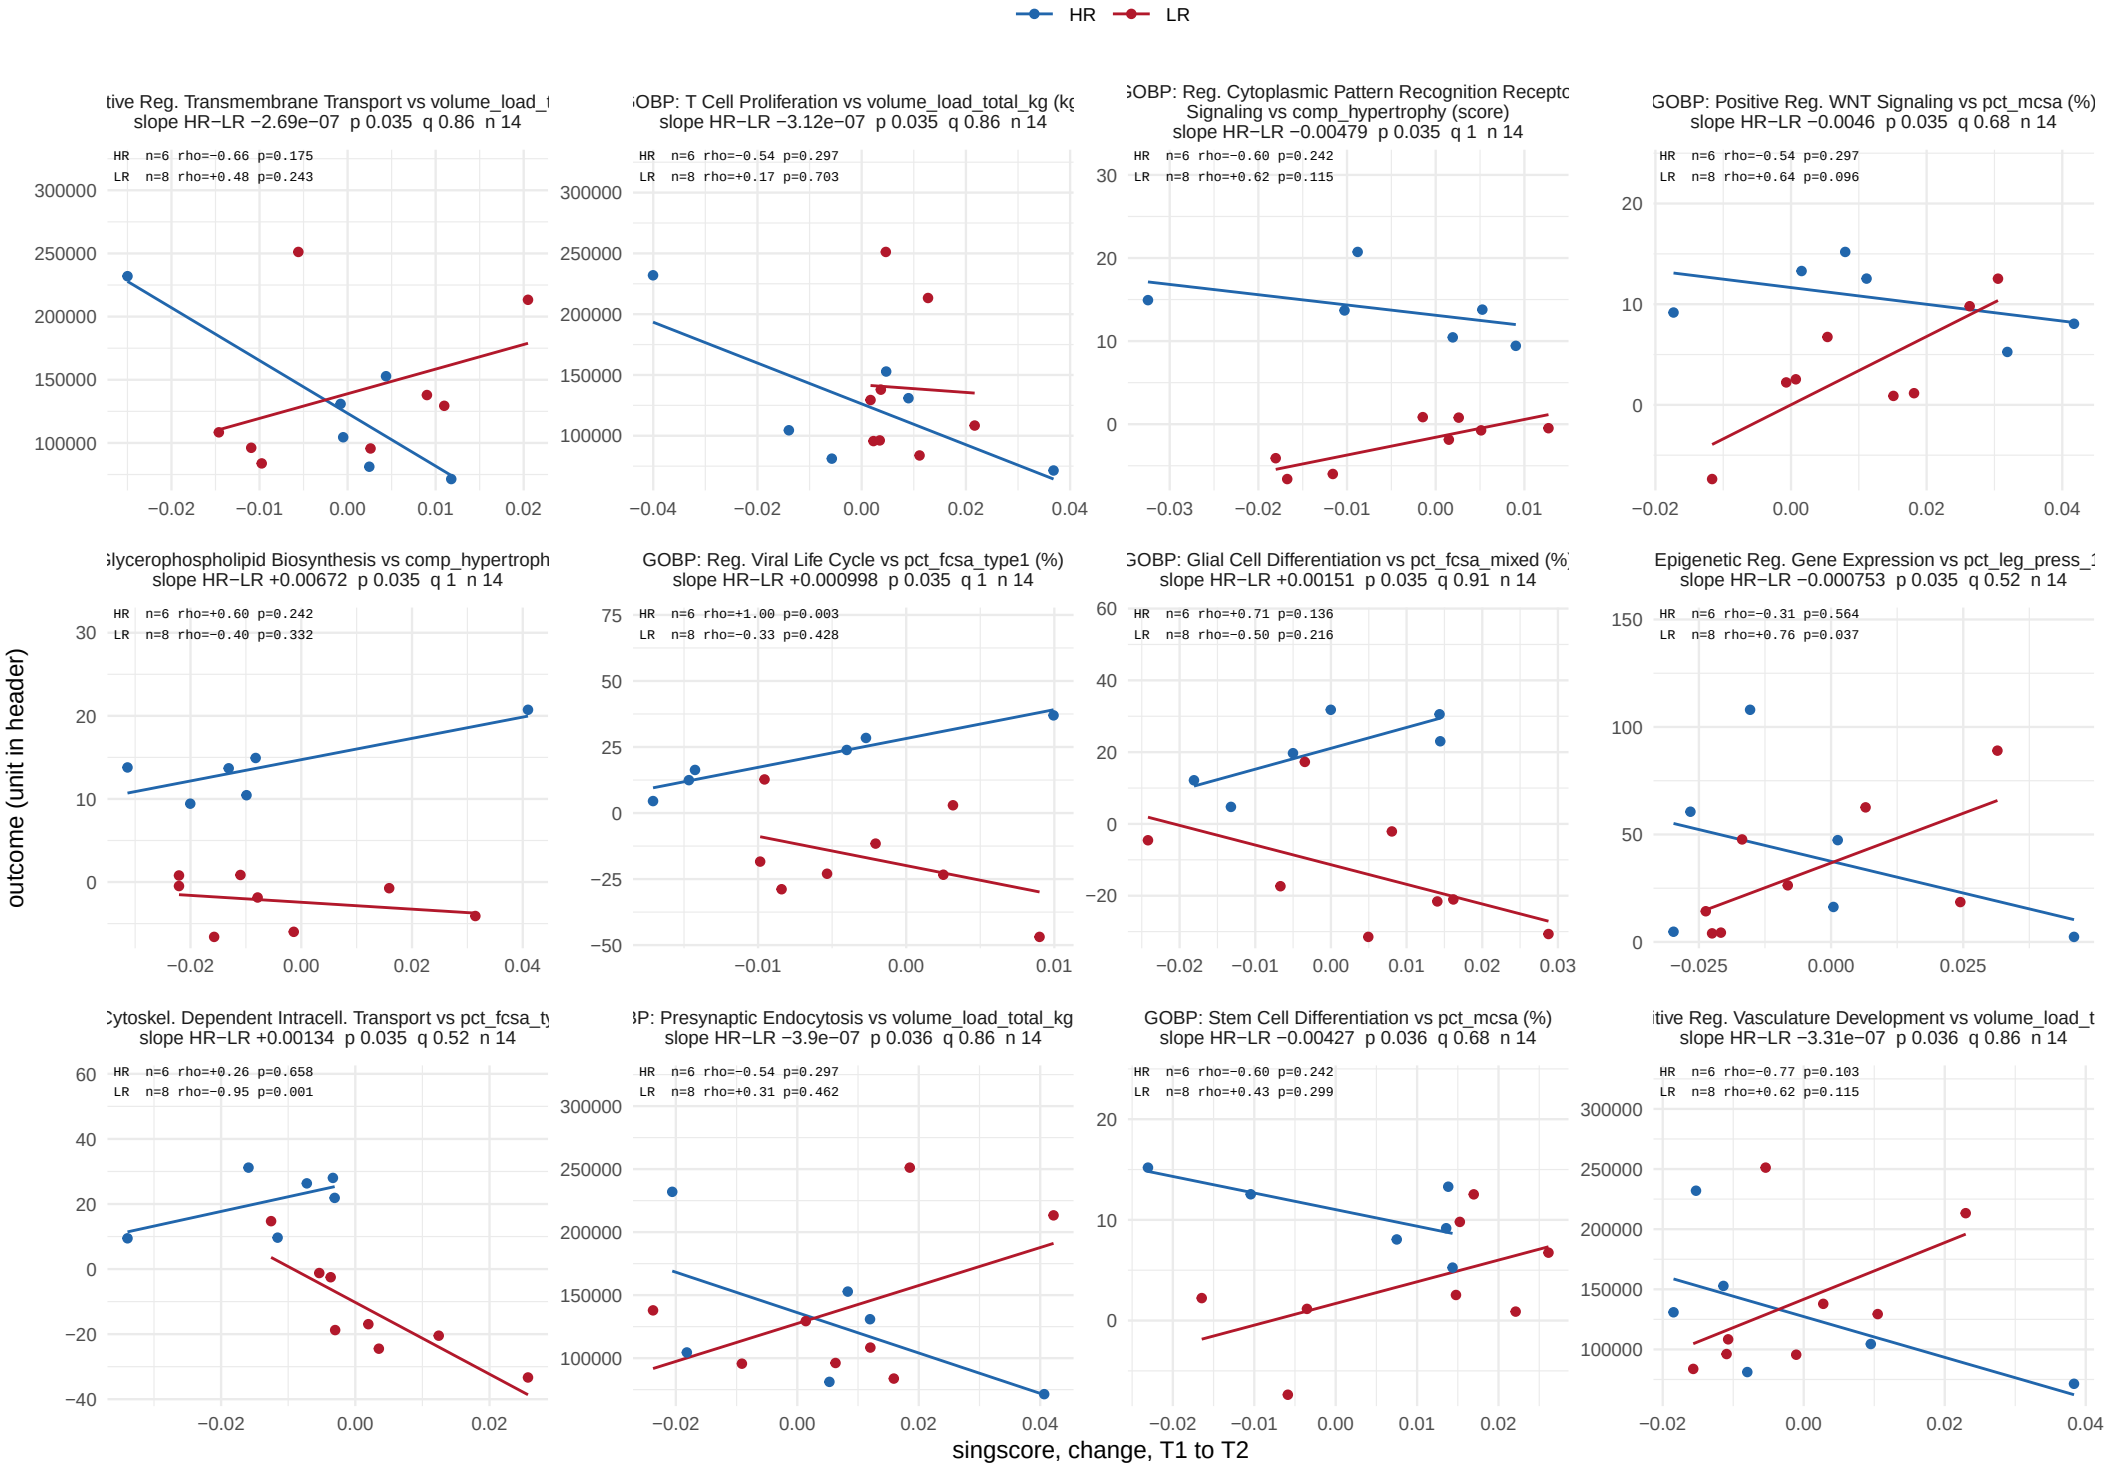


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, training window


506 of 11024 feature−outcome pairs at p < 0.05, 18 at BH < 0.05. Page 31 of 43.

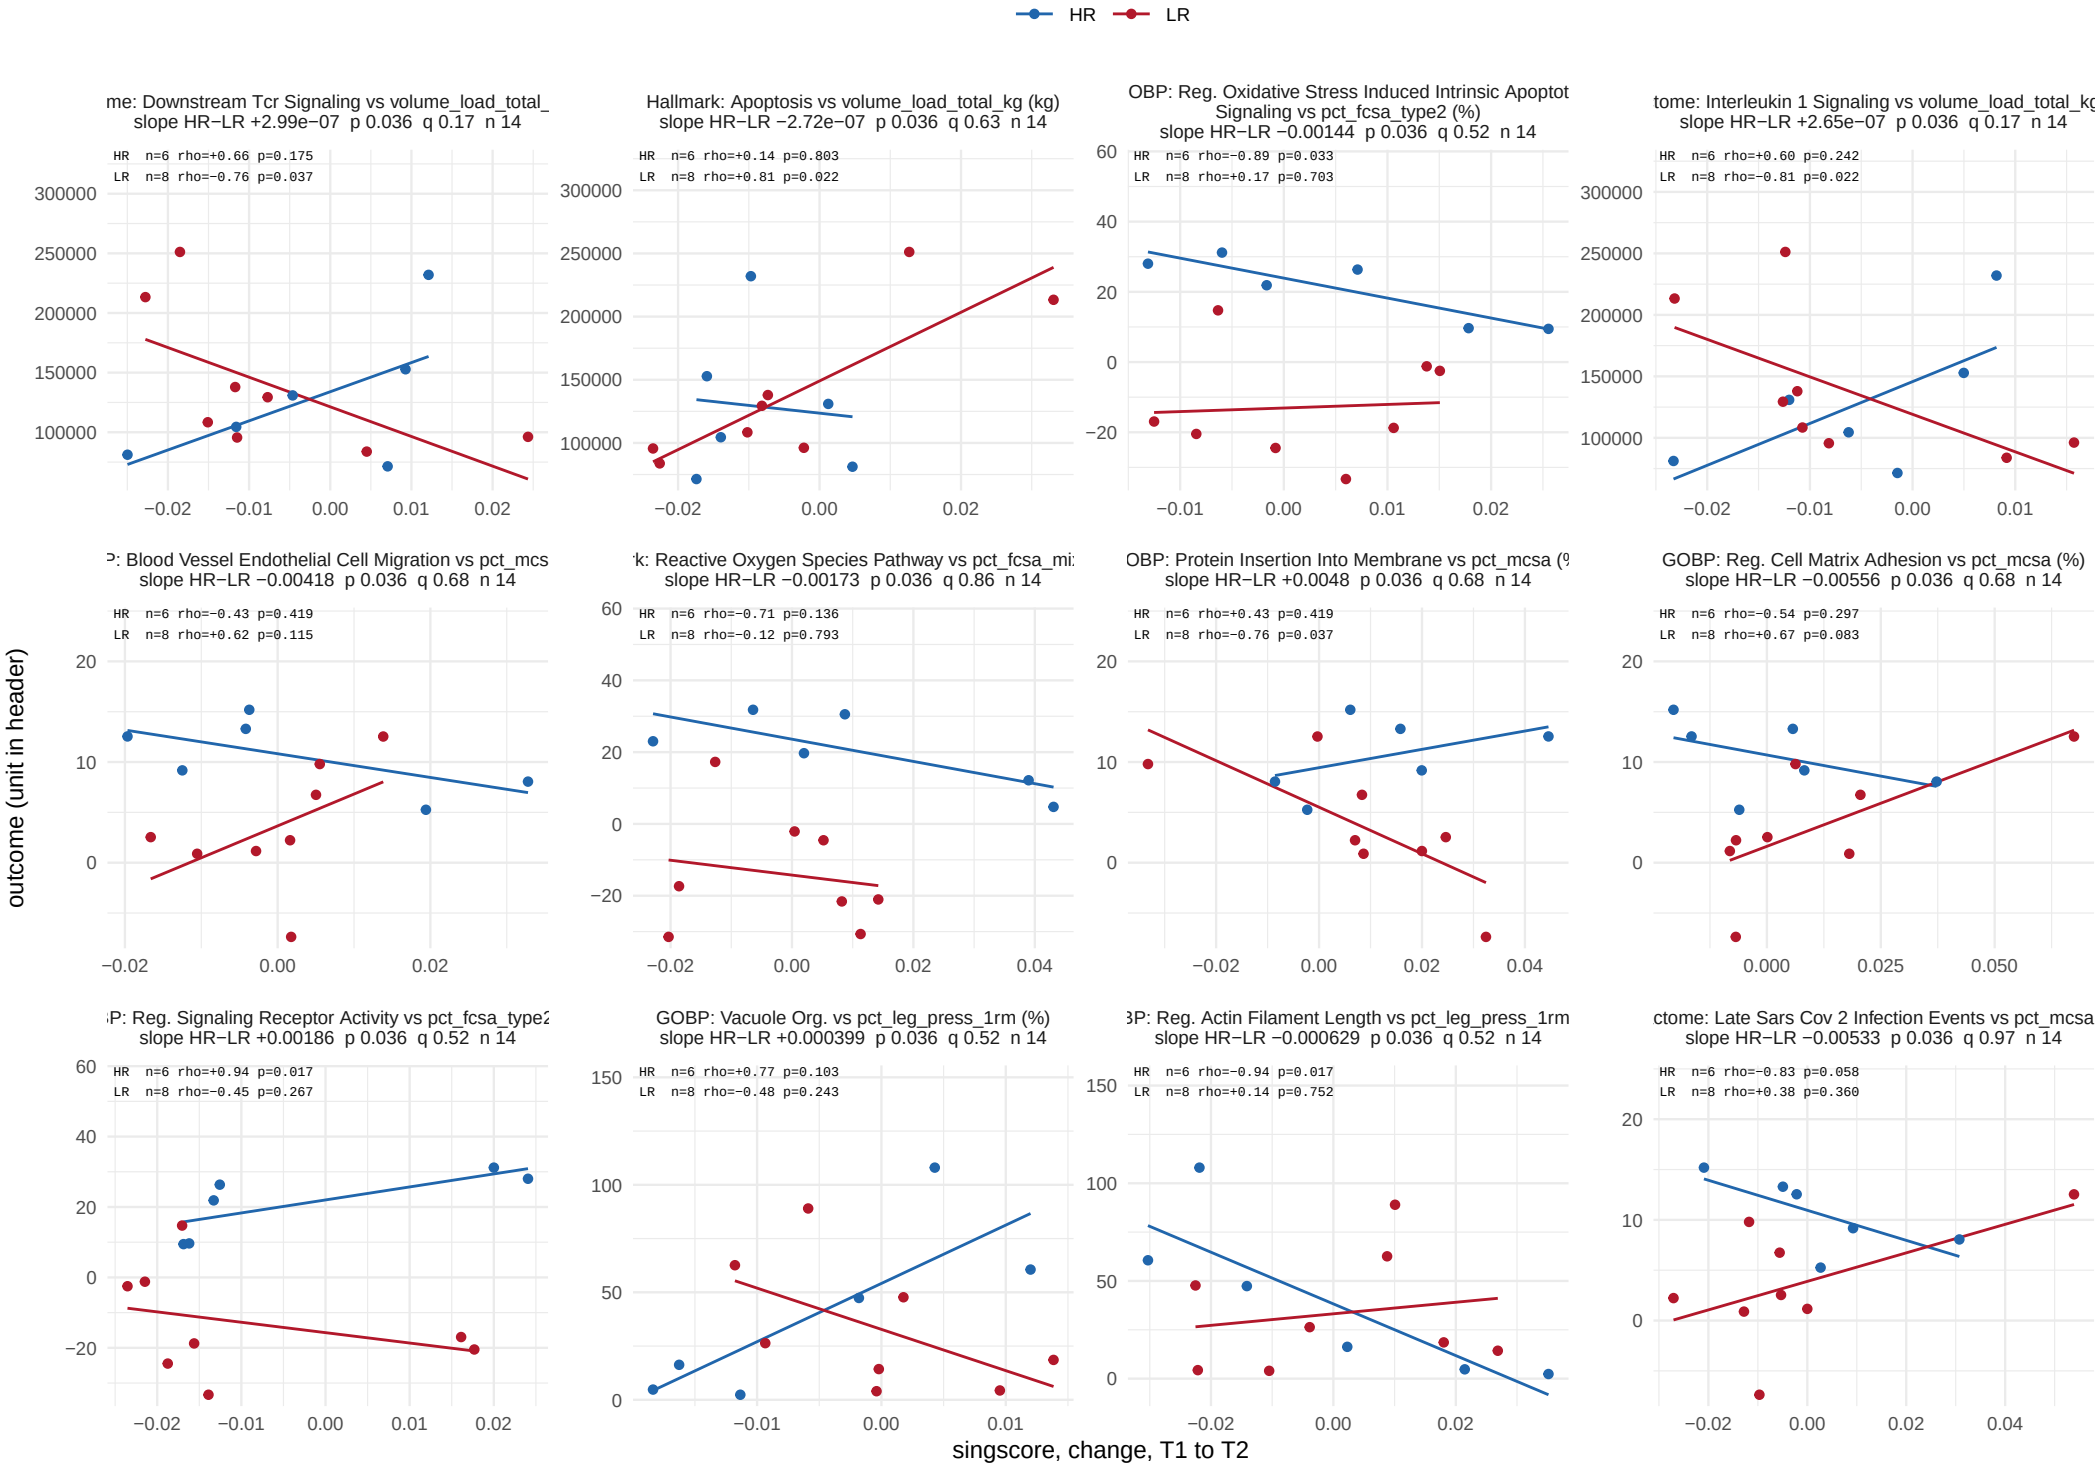


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, training window


506 of 11024 feature−outcome pairs at p < 0.05, 18 at BH < 0.05. Page 32 of 43.

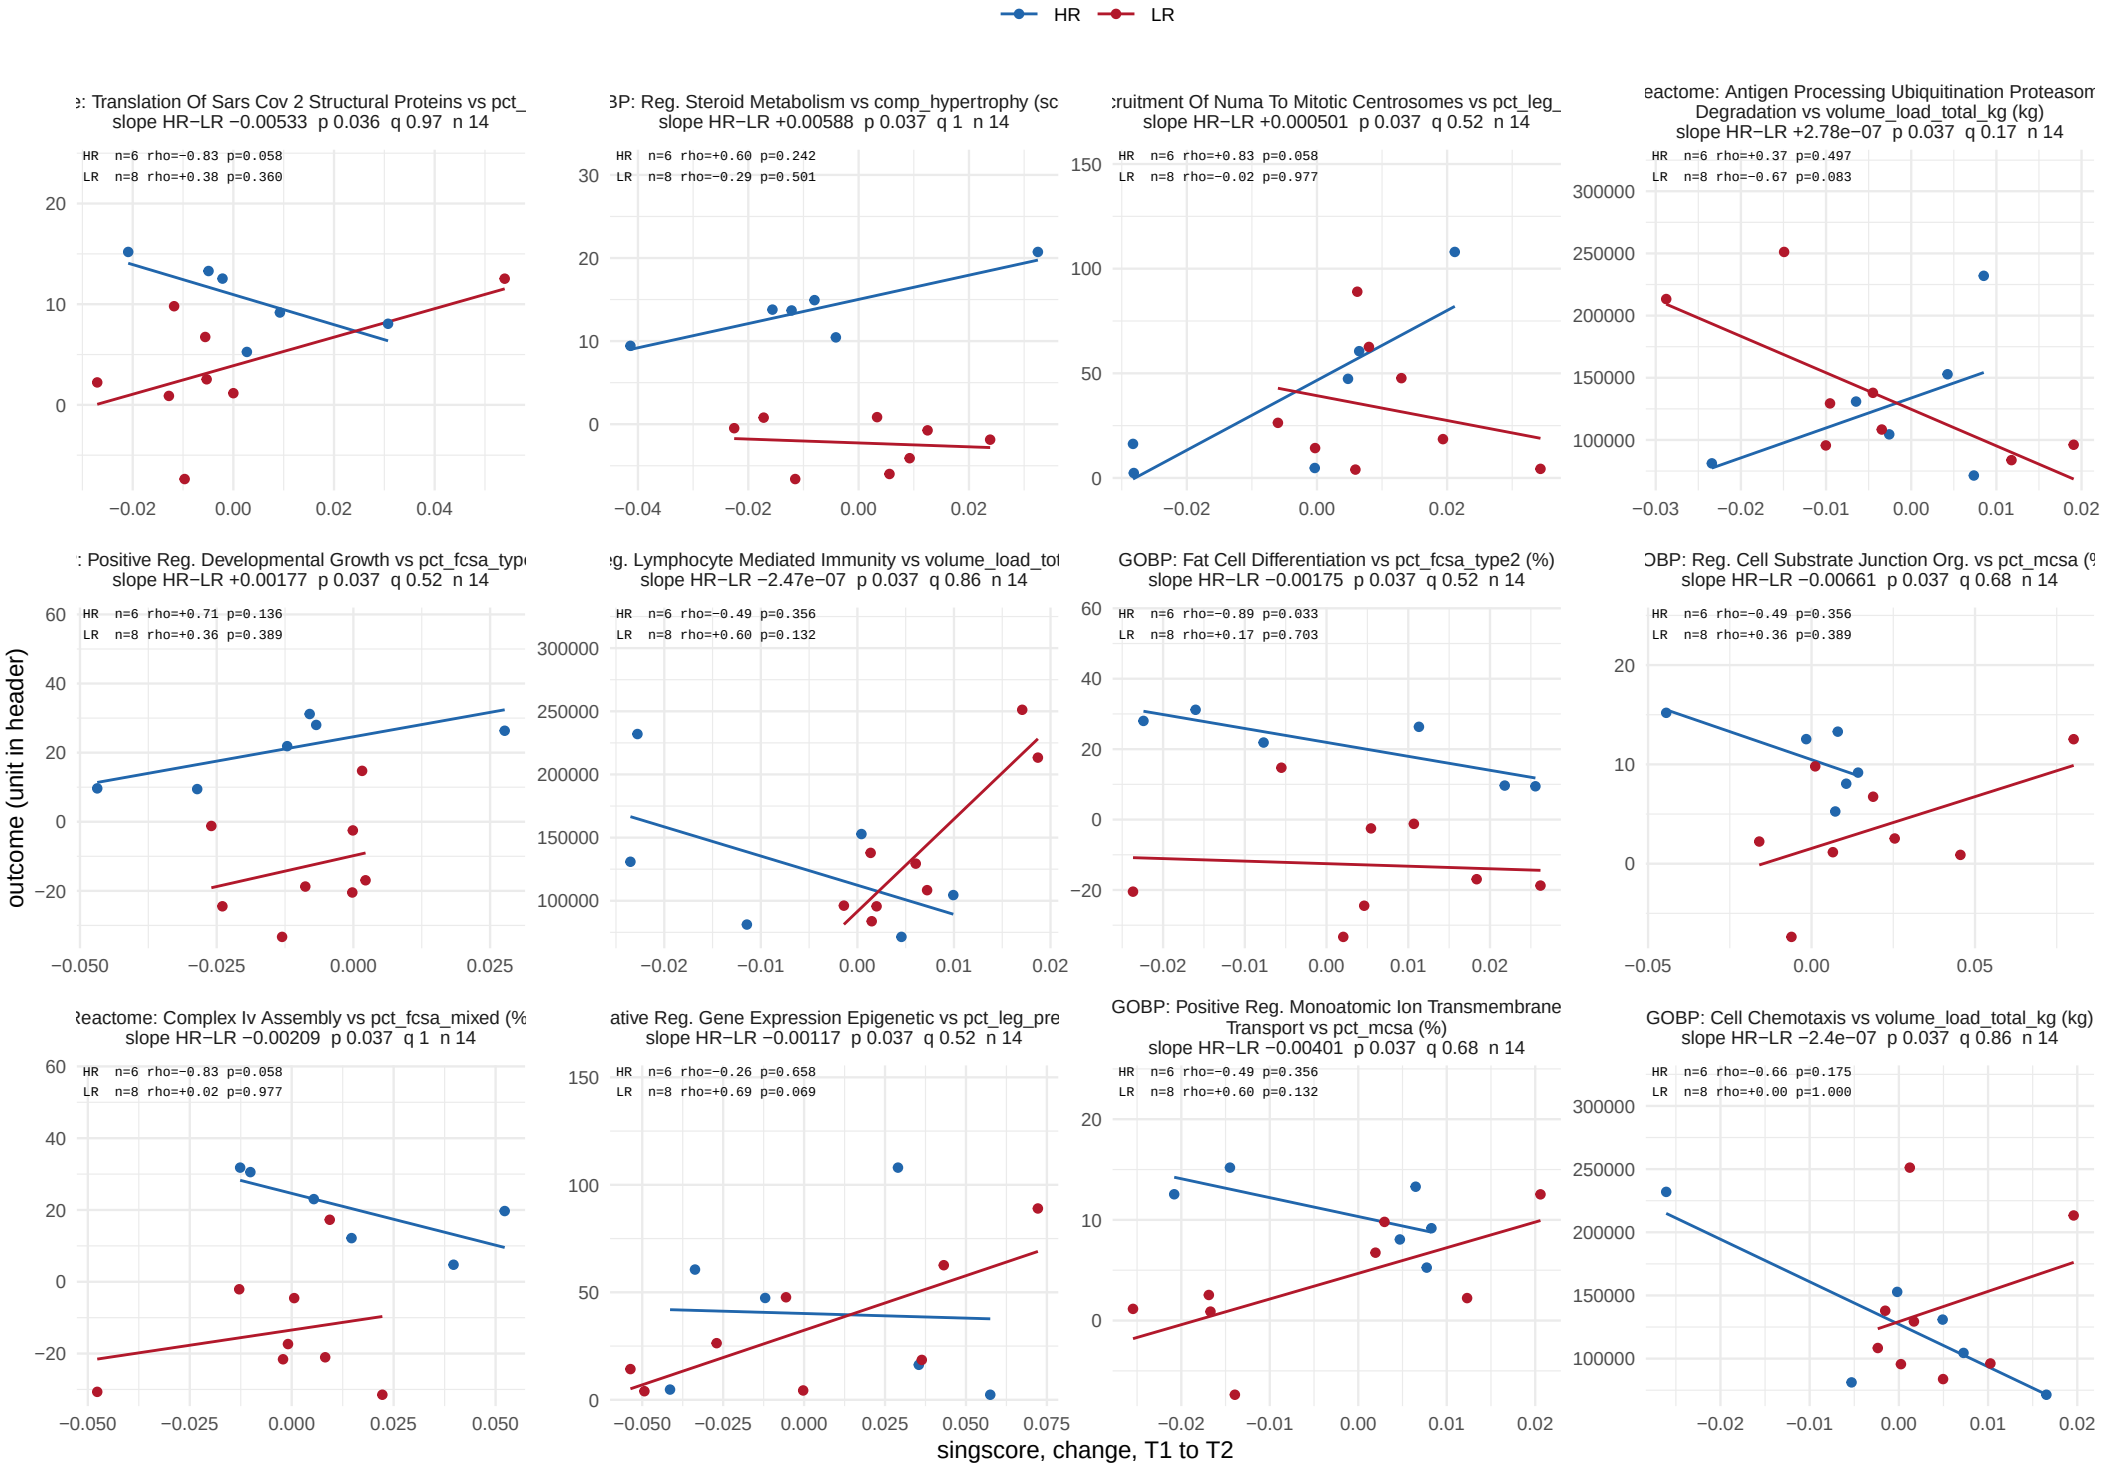


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, training window


506 of 11024 feature−outcome pairs at p < 0.05, 18 at BH < 0.05. Page 33 of 43.

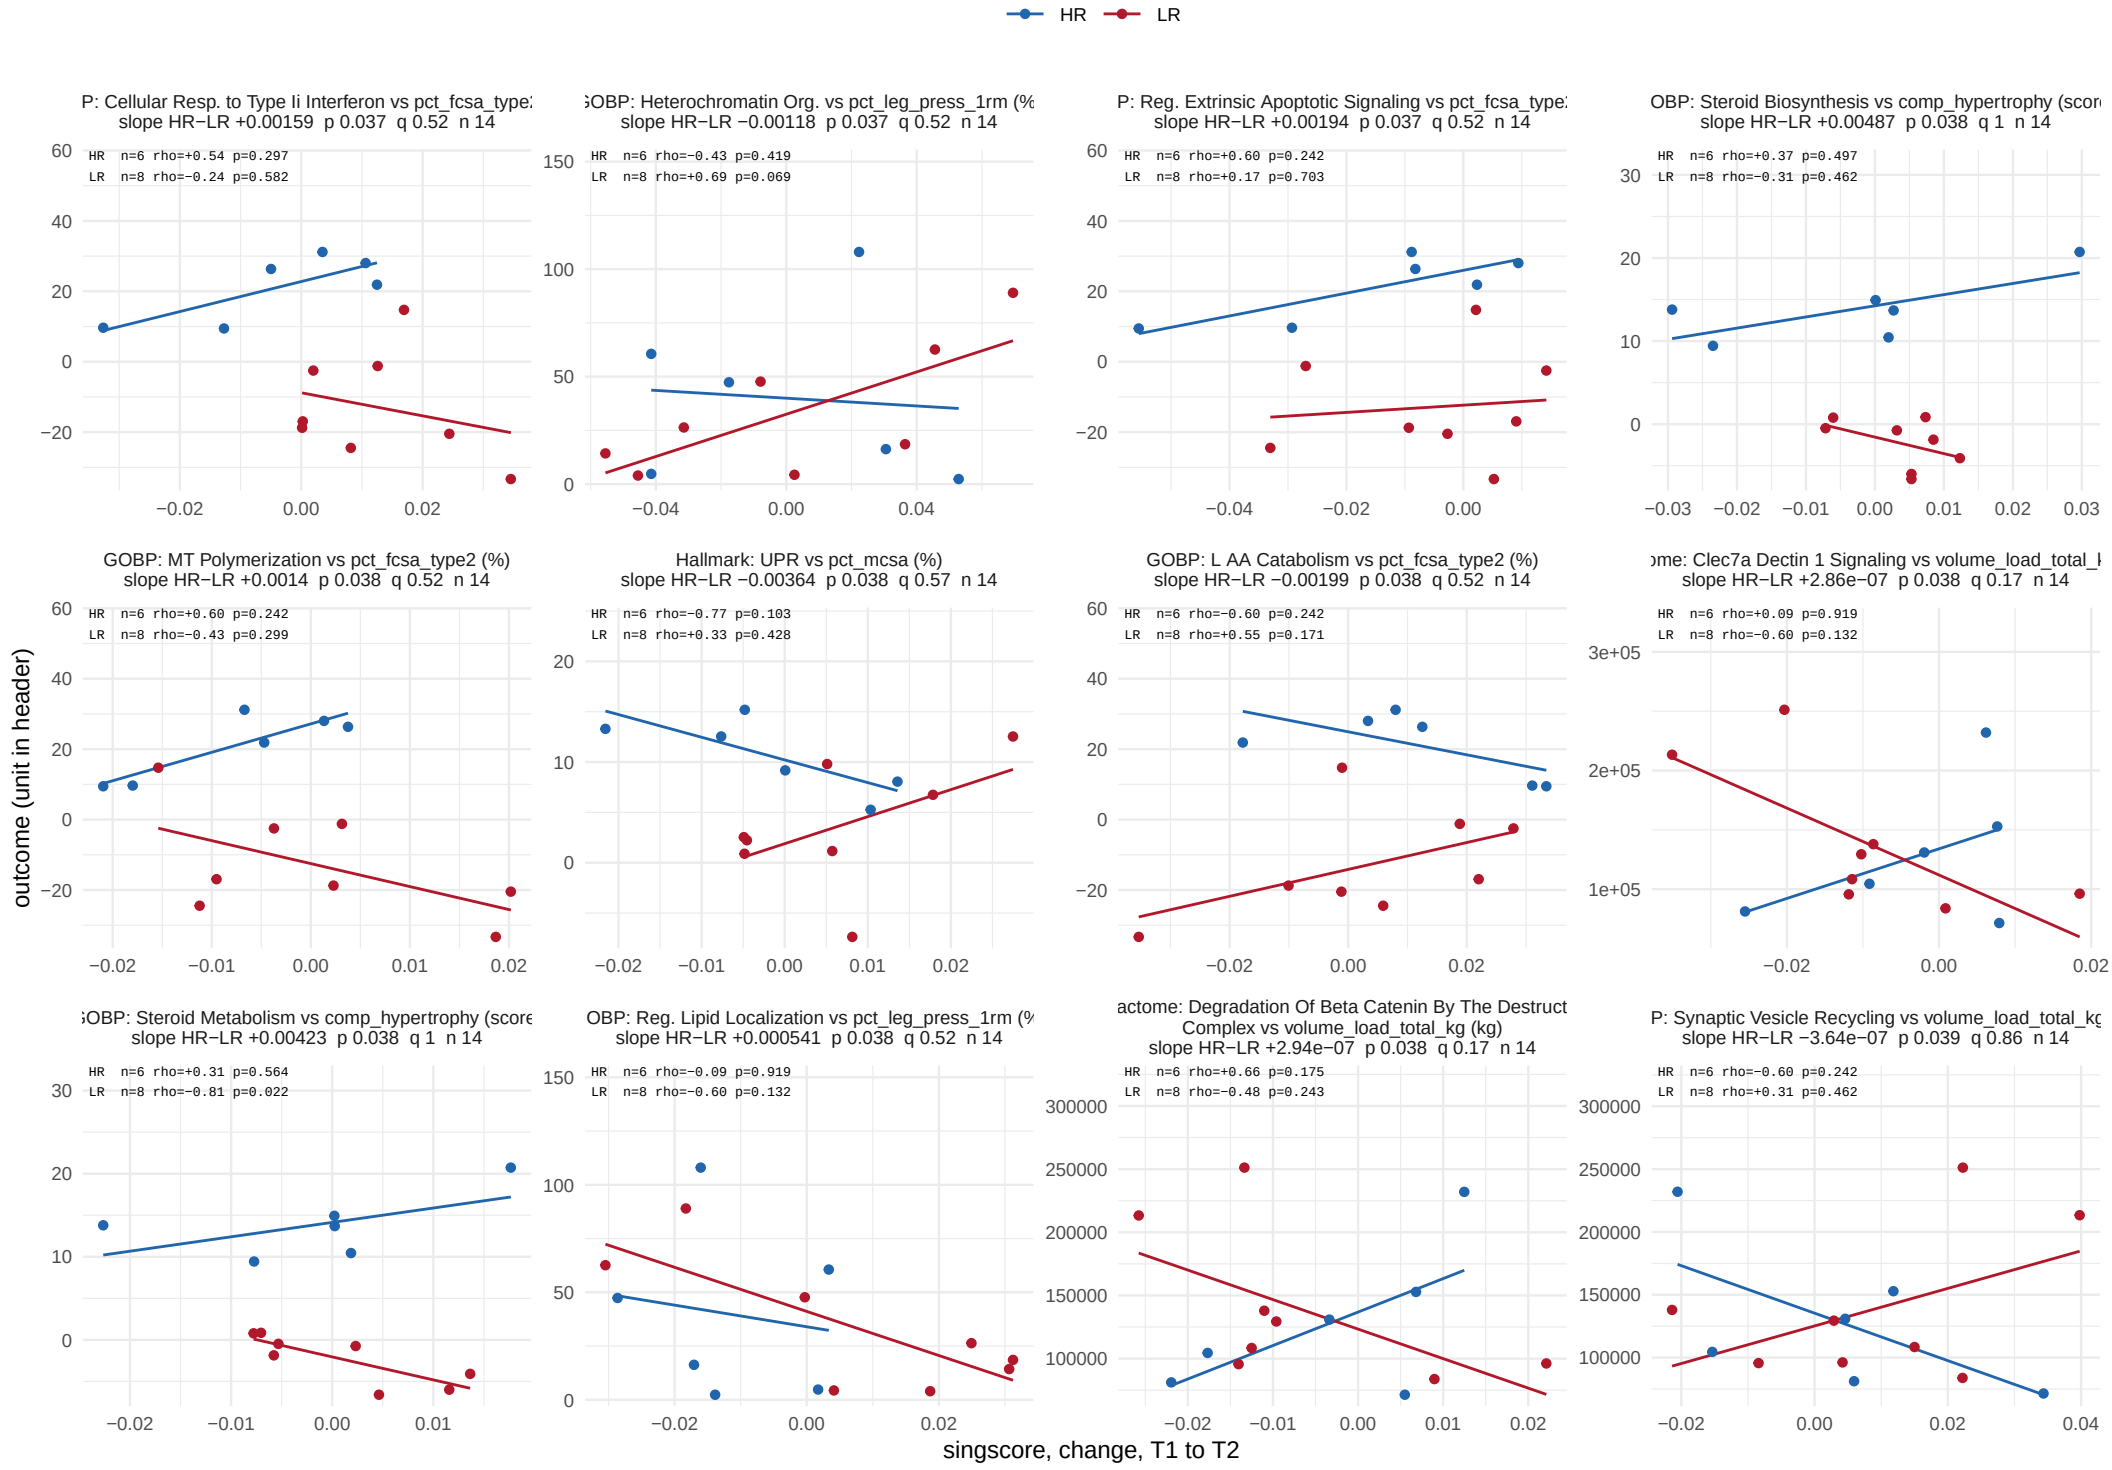


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, training window


506 of 11024 feature−outcome pairs at p < 0.05, 18 at BH < 0.05. Page 34 of 43.

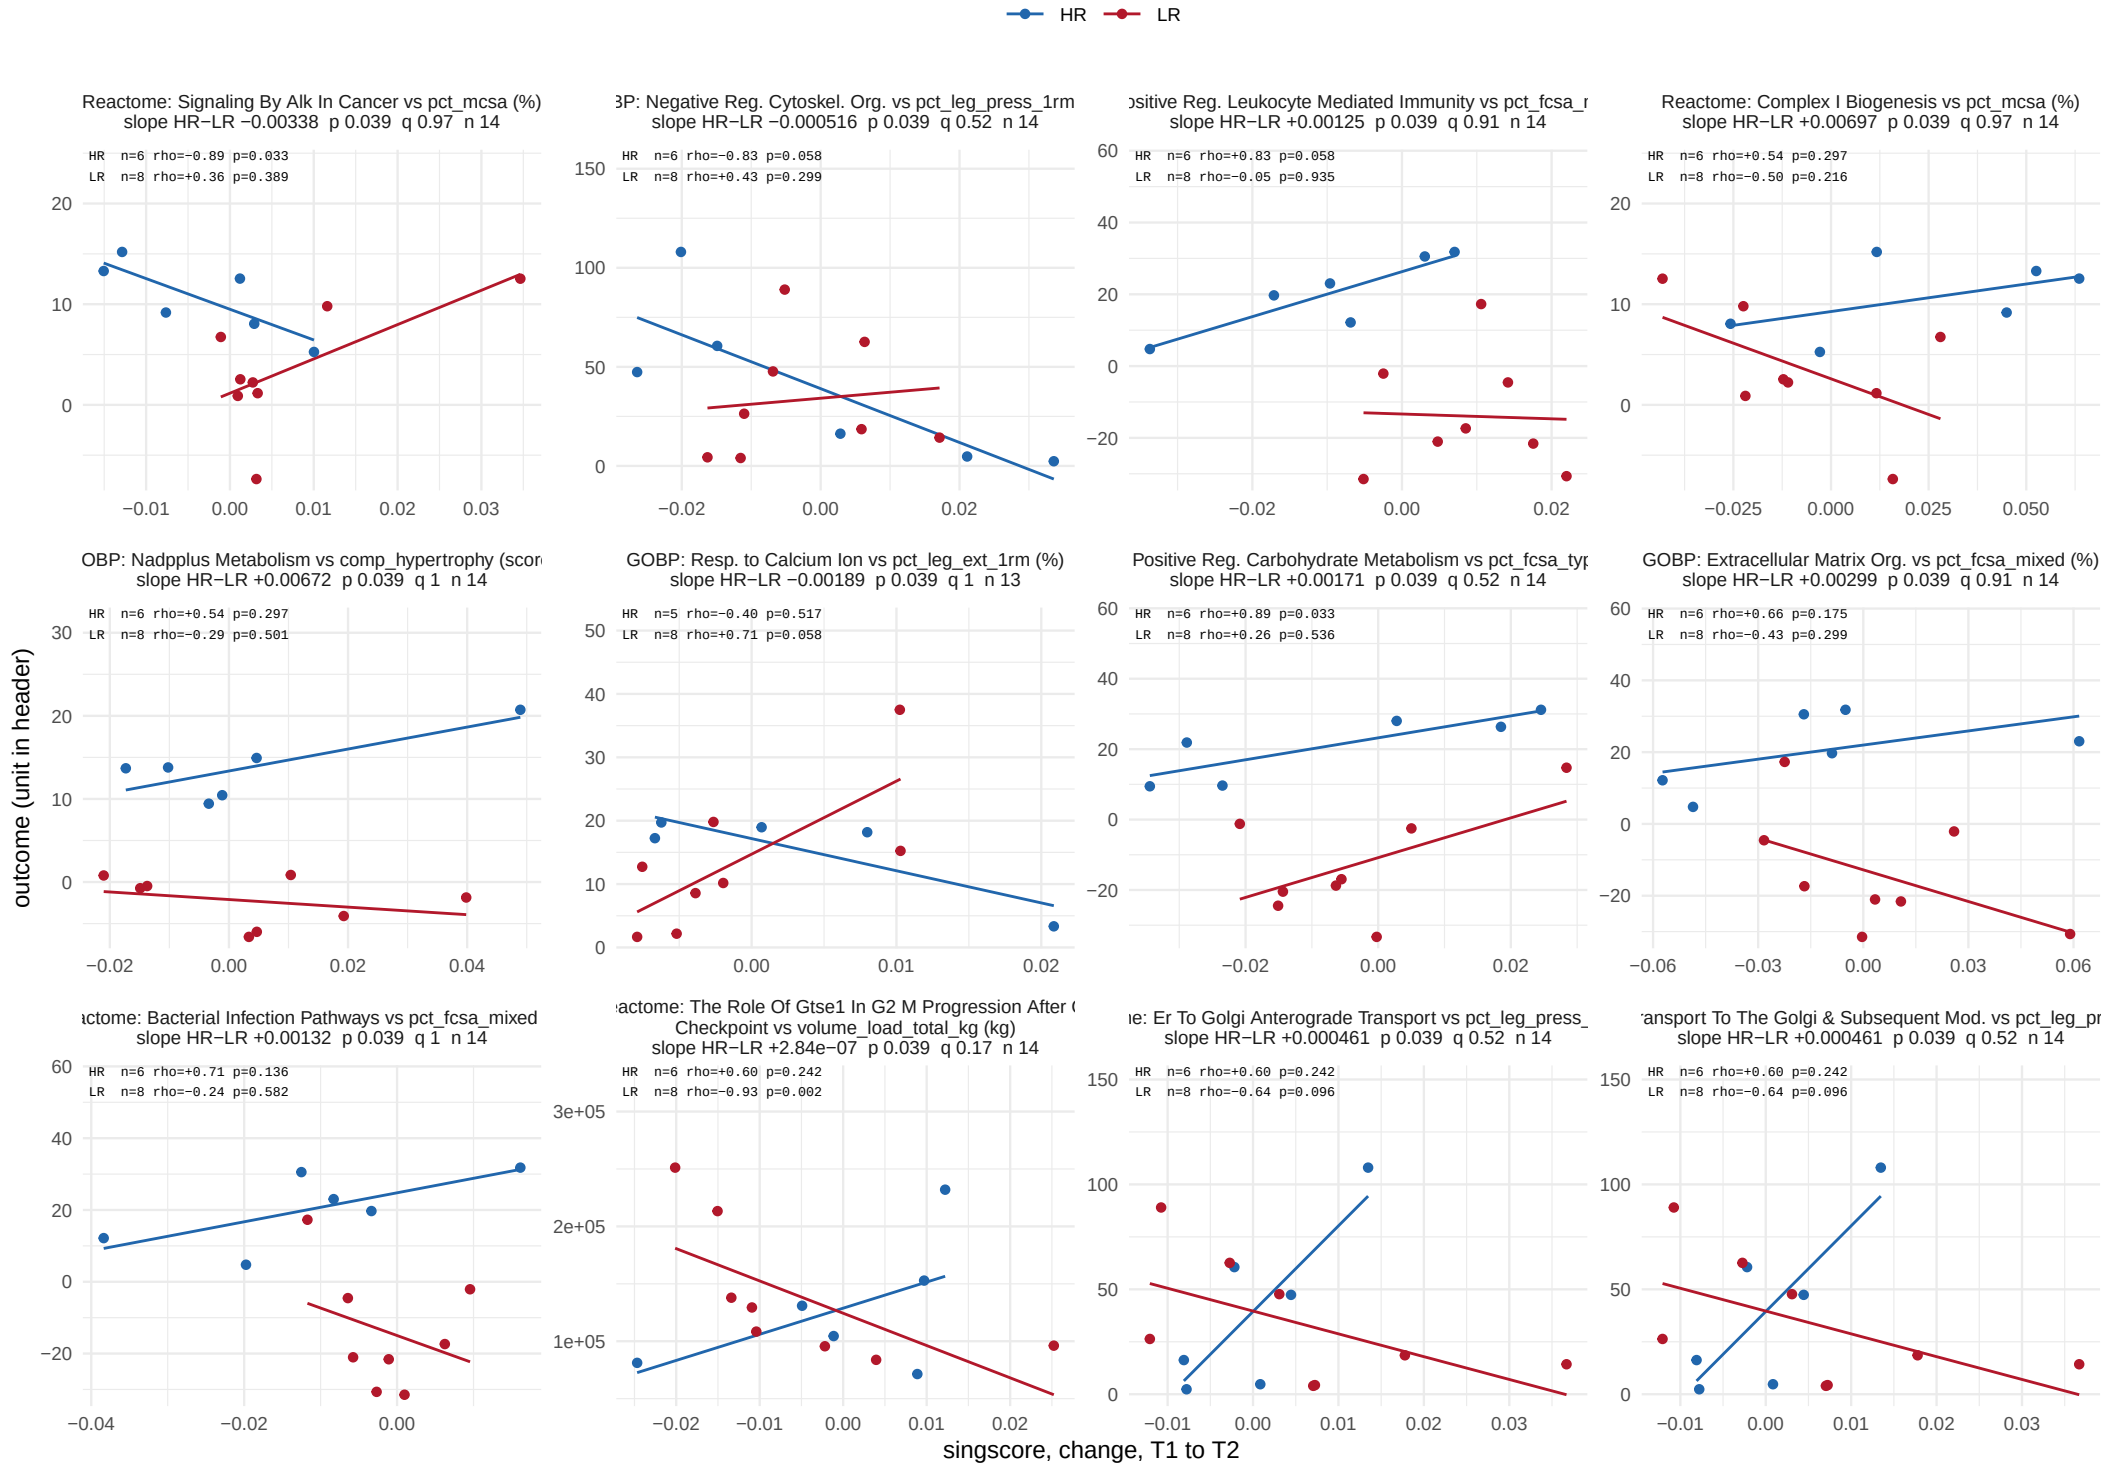


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, training window


506 of 11024 feature−outcome pairs at p < 0.05, 18 at BH < 0.05. Page 35 of 43.

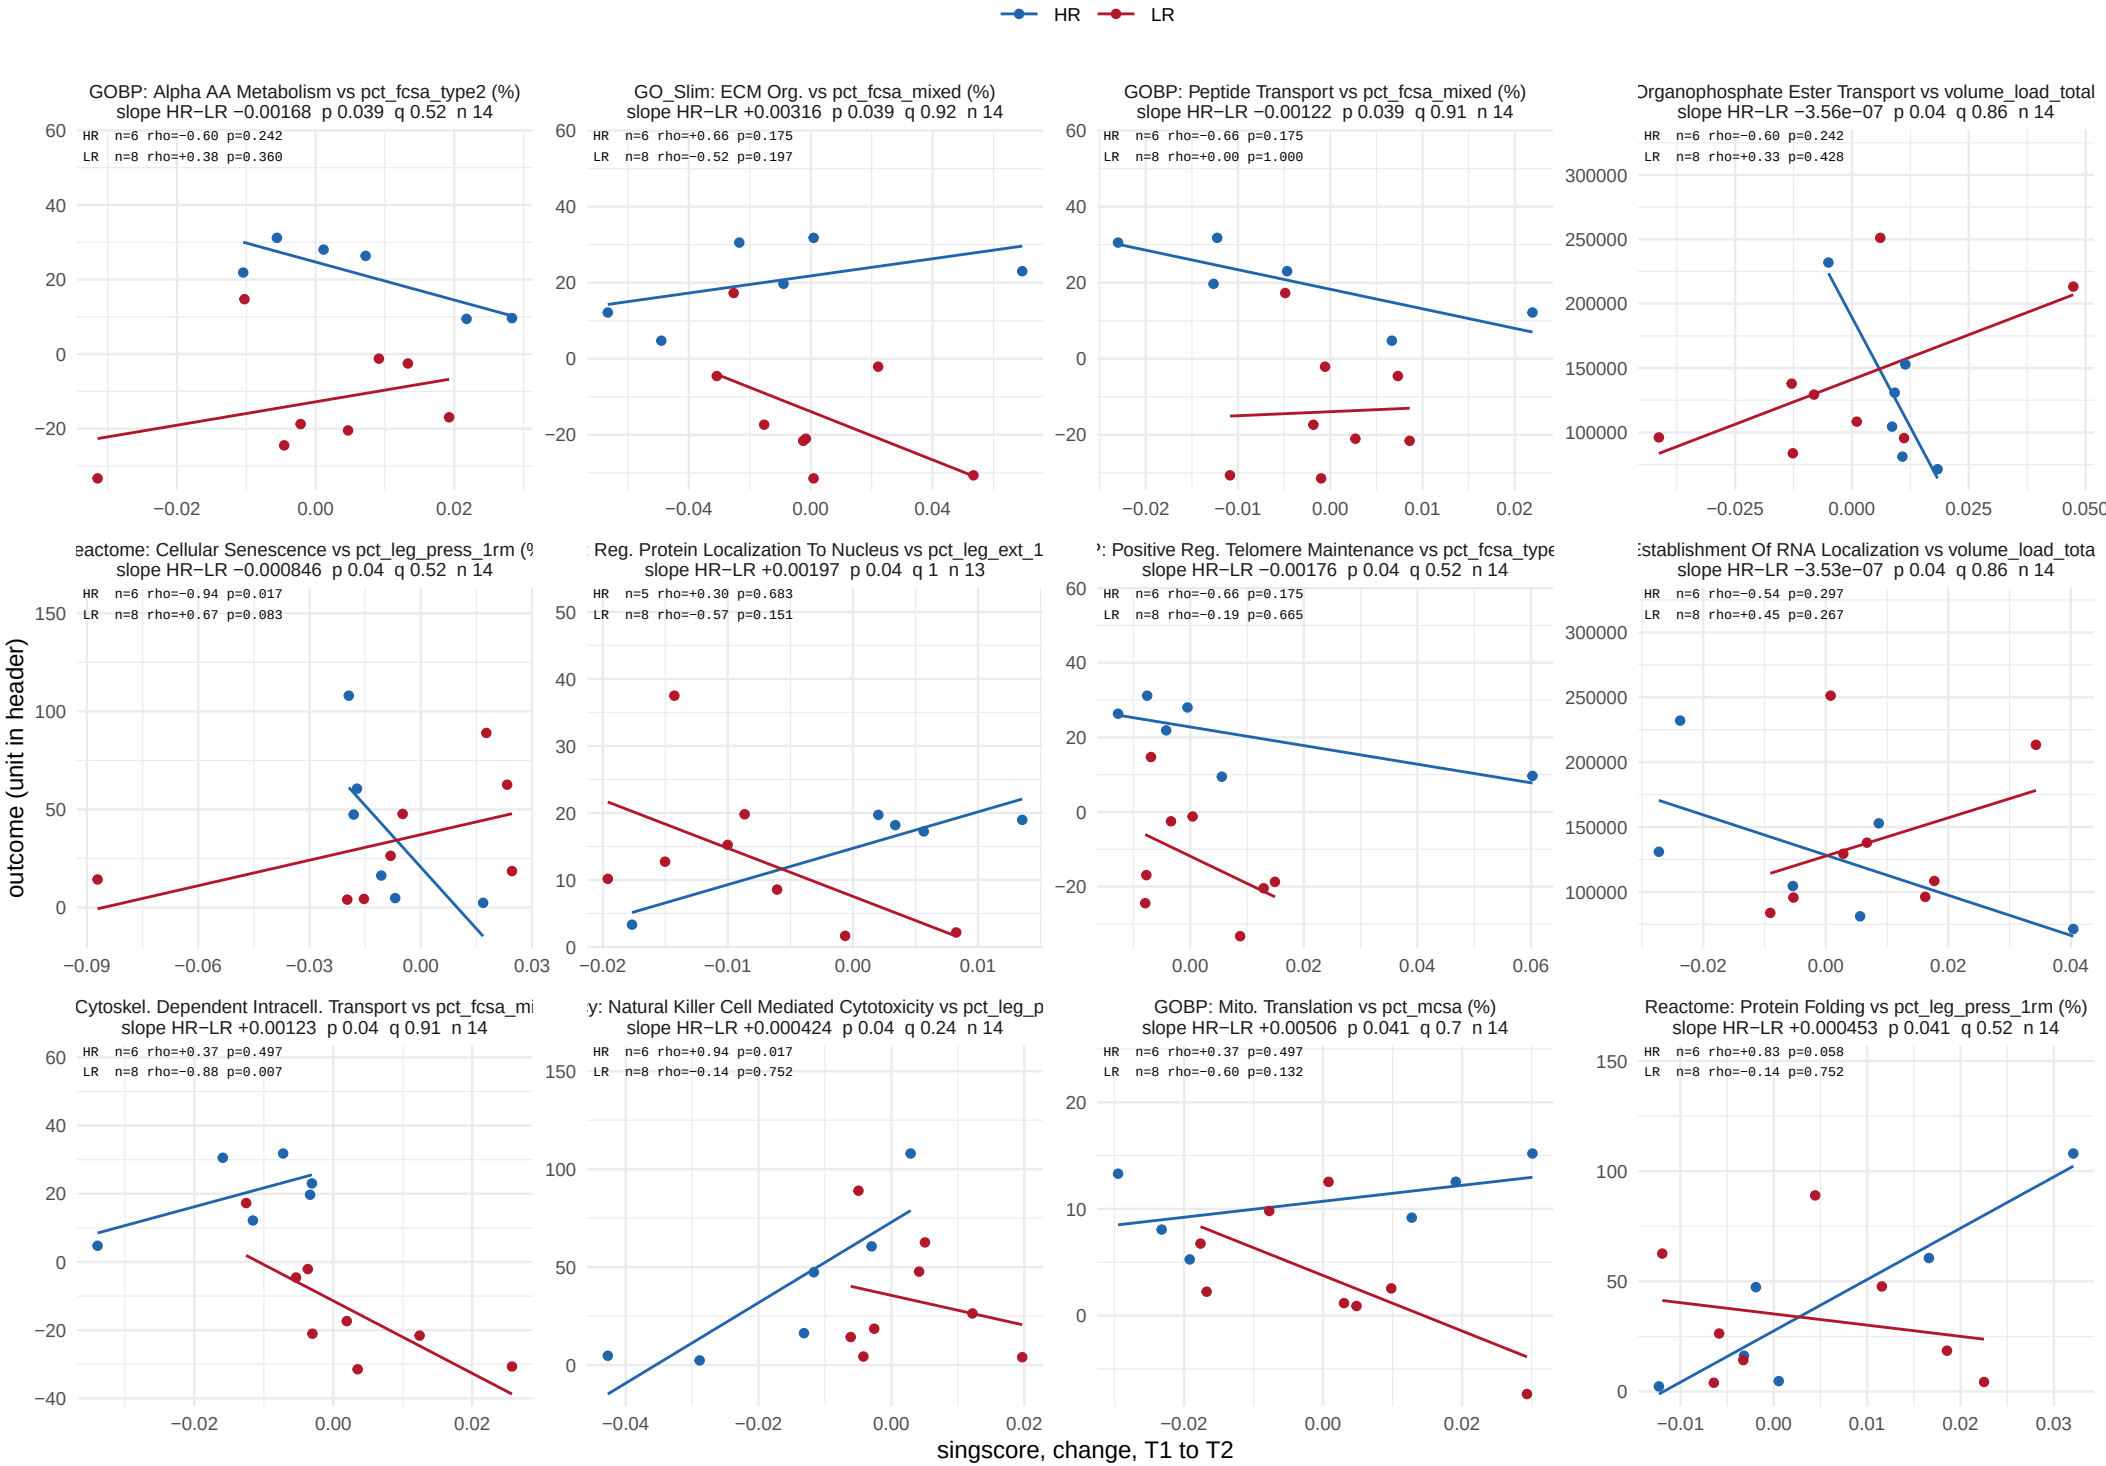


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, training window


506 of 11024 feature−outcome pairs at p < 0.05, 18 at BH < 0.05. Page 36 of 43.

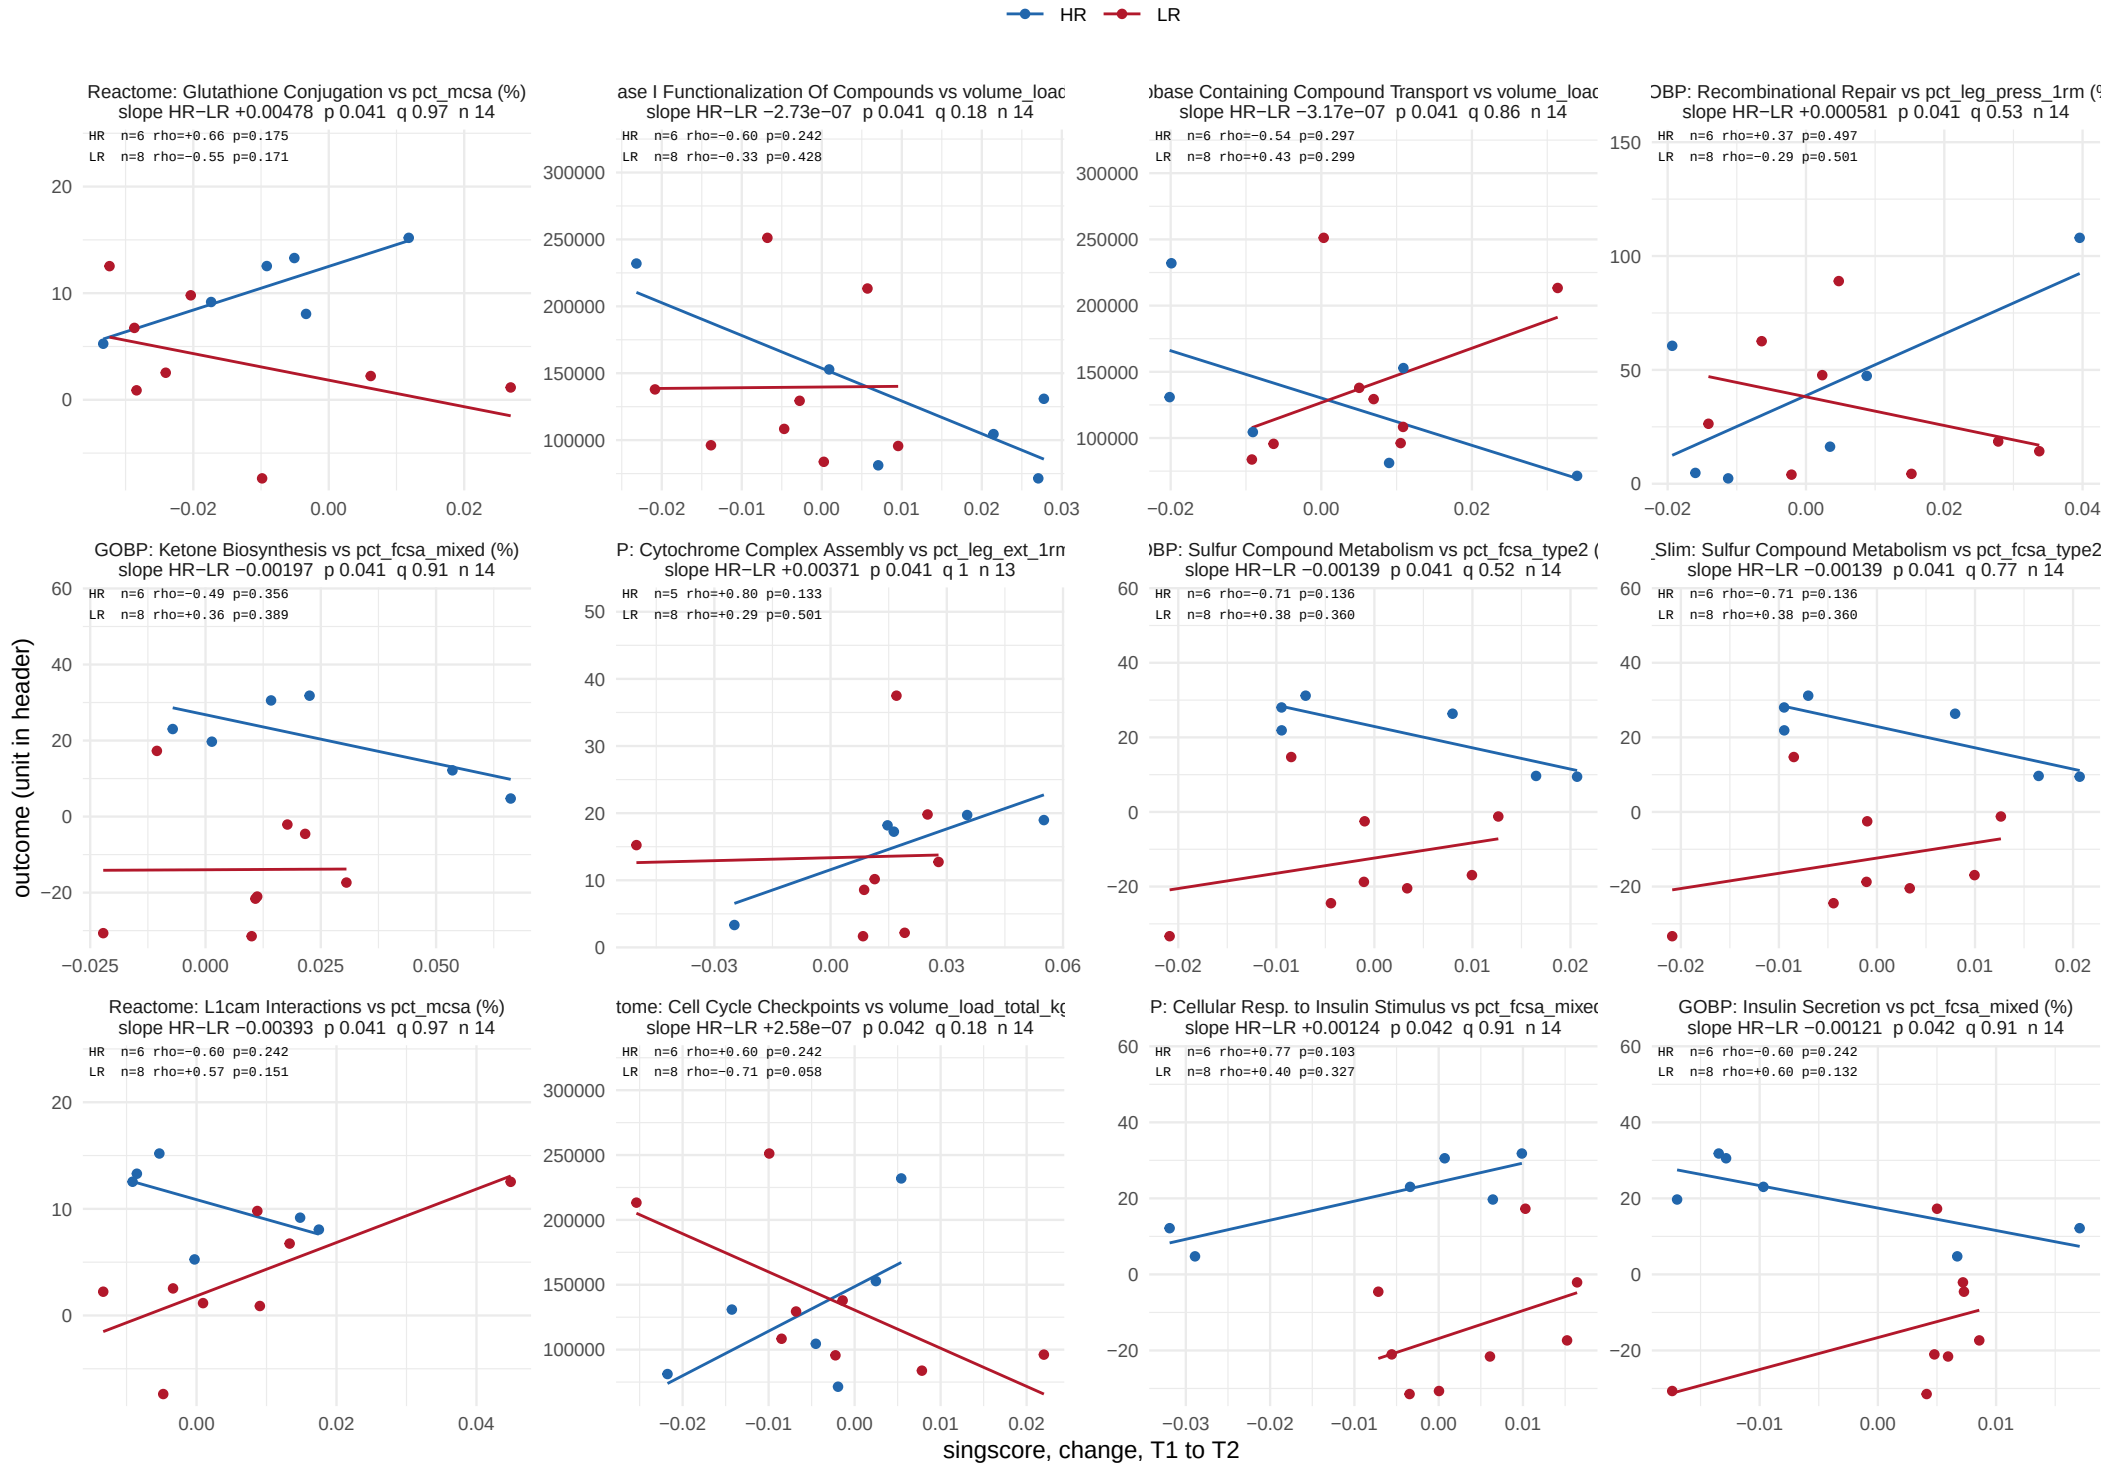


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, training window


506 of 11024 feature−outcome pairs at p < 0.05, 18 at BH < 0.05. Page 37 of 43.

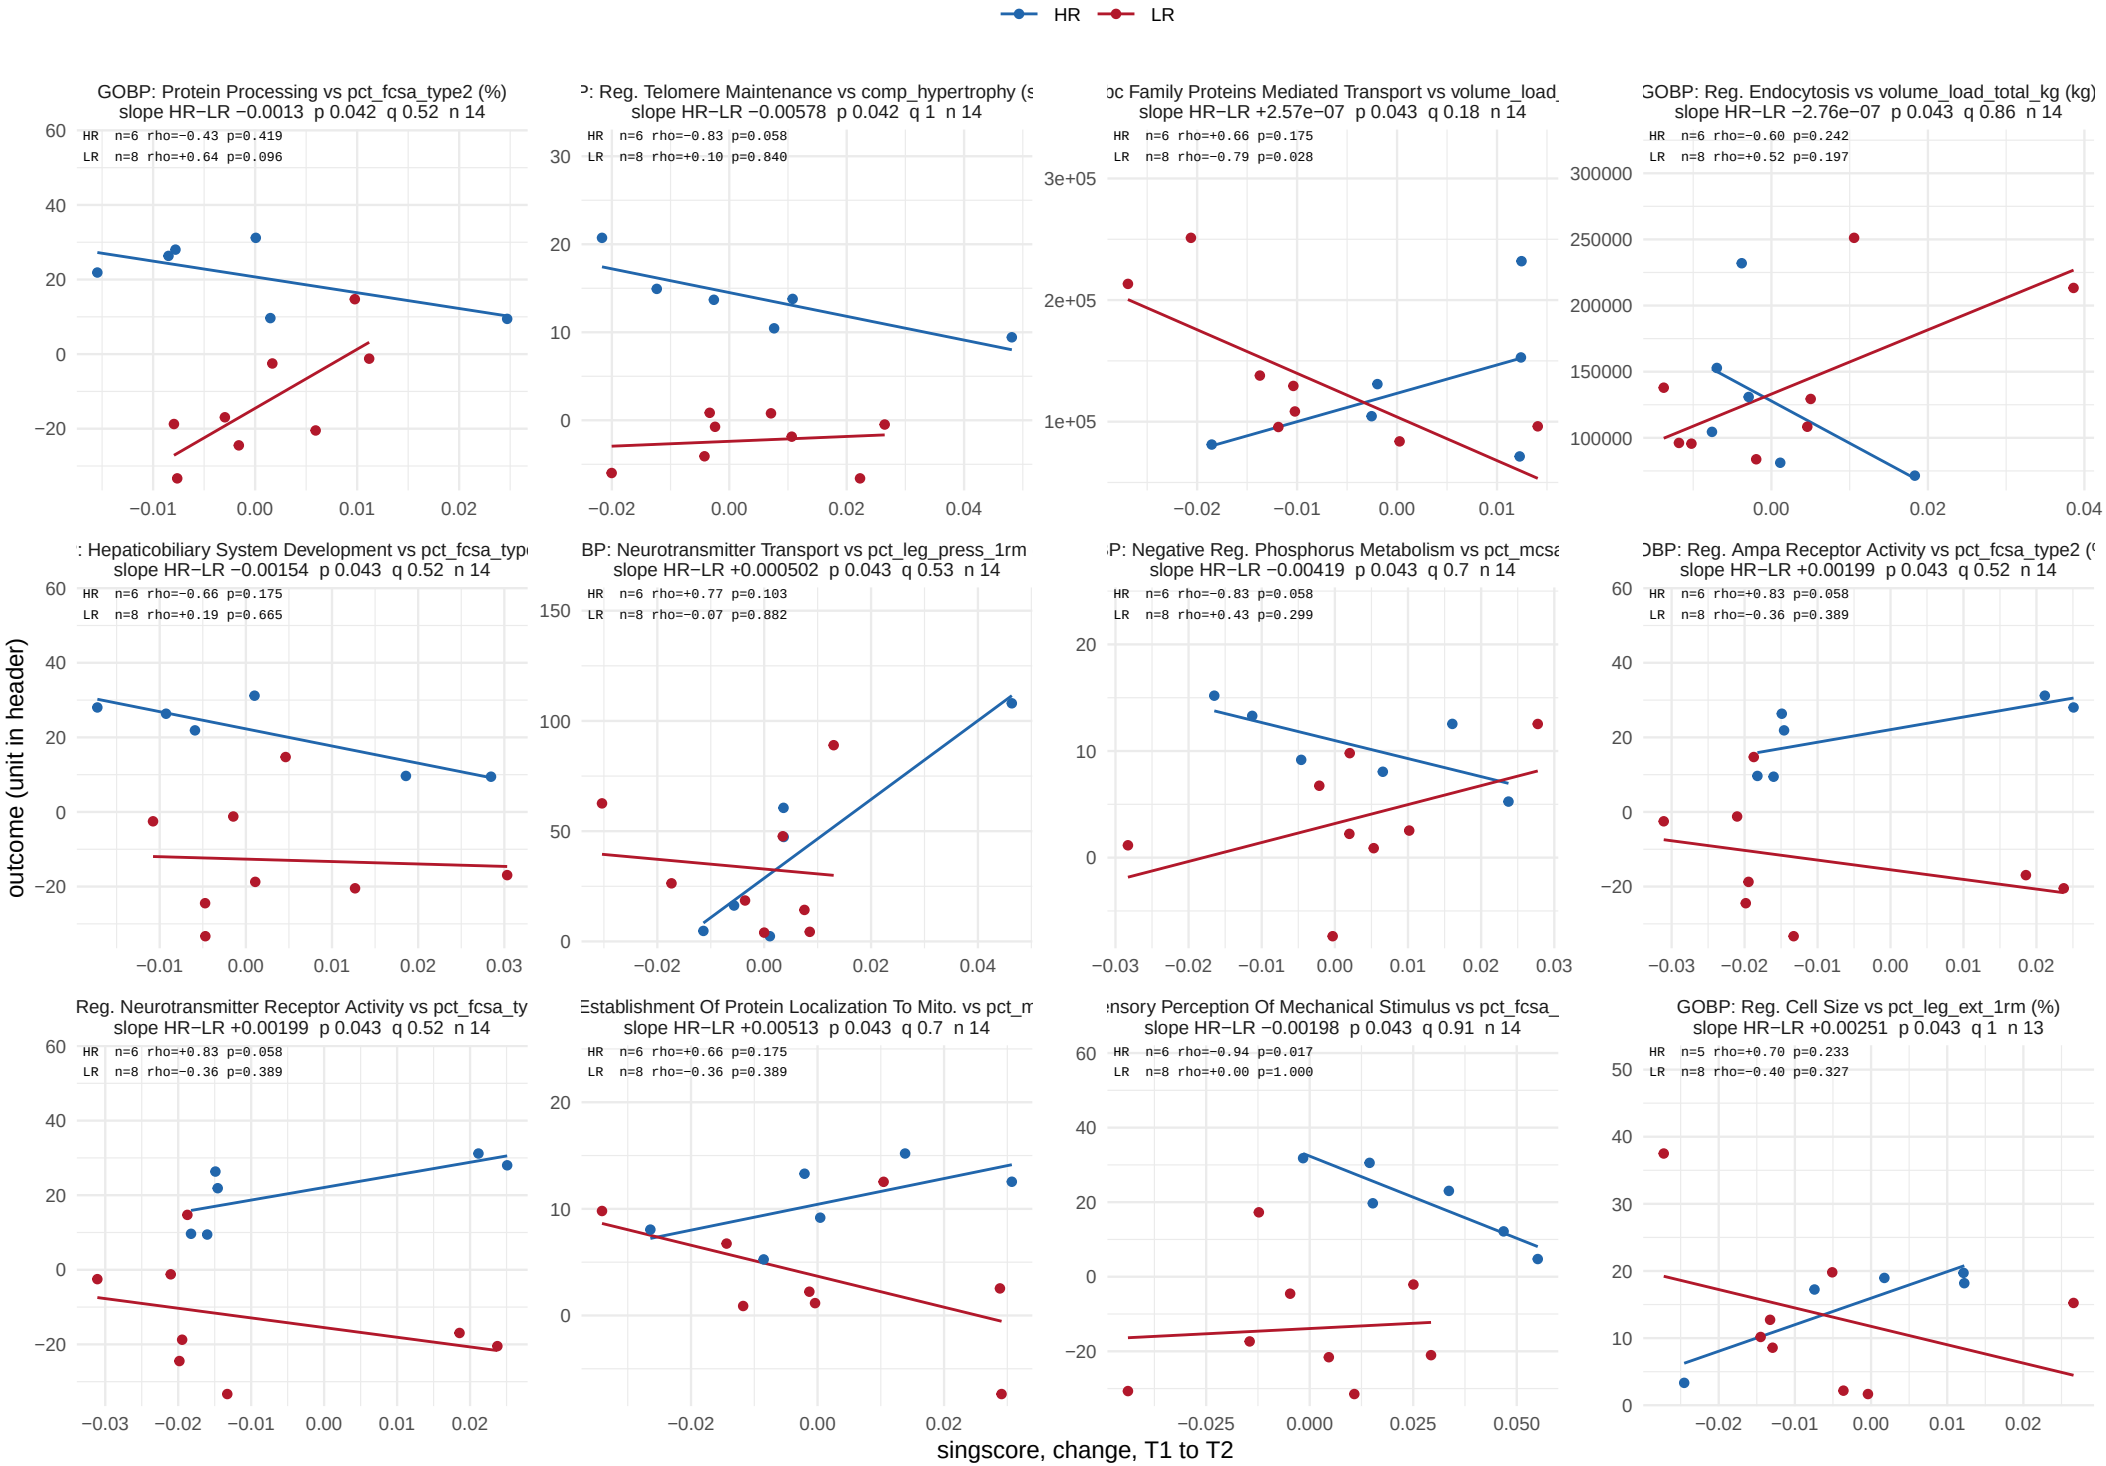


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, training window


506 of 11024 feature−outcome pairs at p < 0.05, 18 at BH < 0.05. Page 38 of 43.

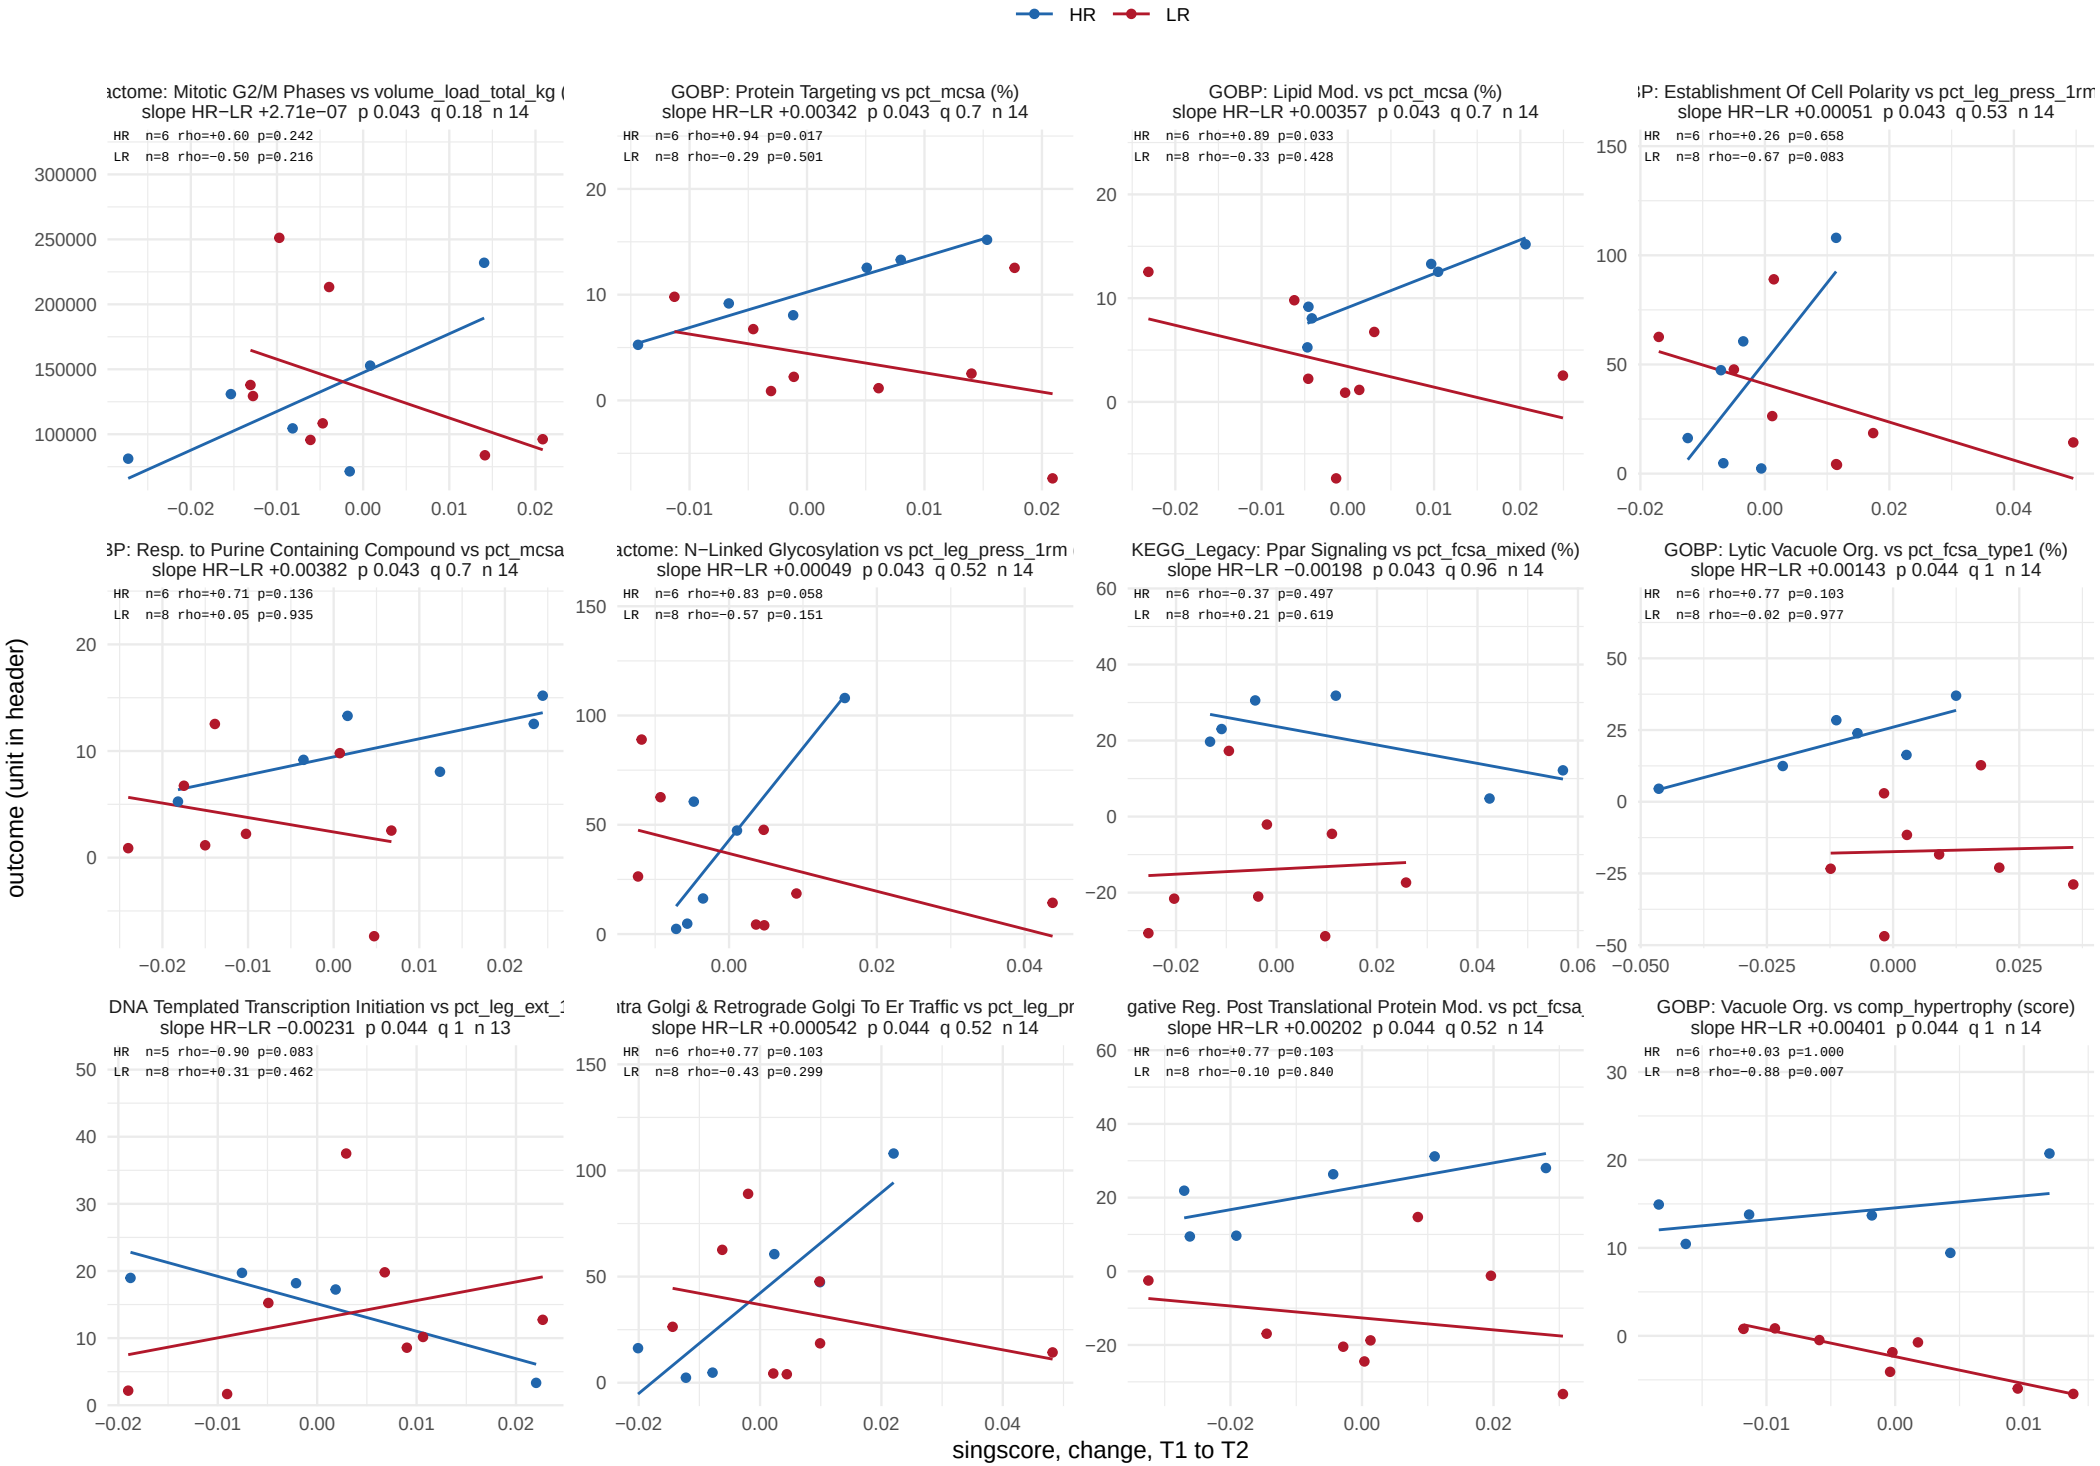


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, training window


506 of 11024 feature−outcome pairs at p < 0.05, 18 at BH < 0.05. Page 39 of 43.

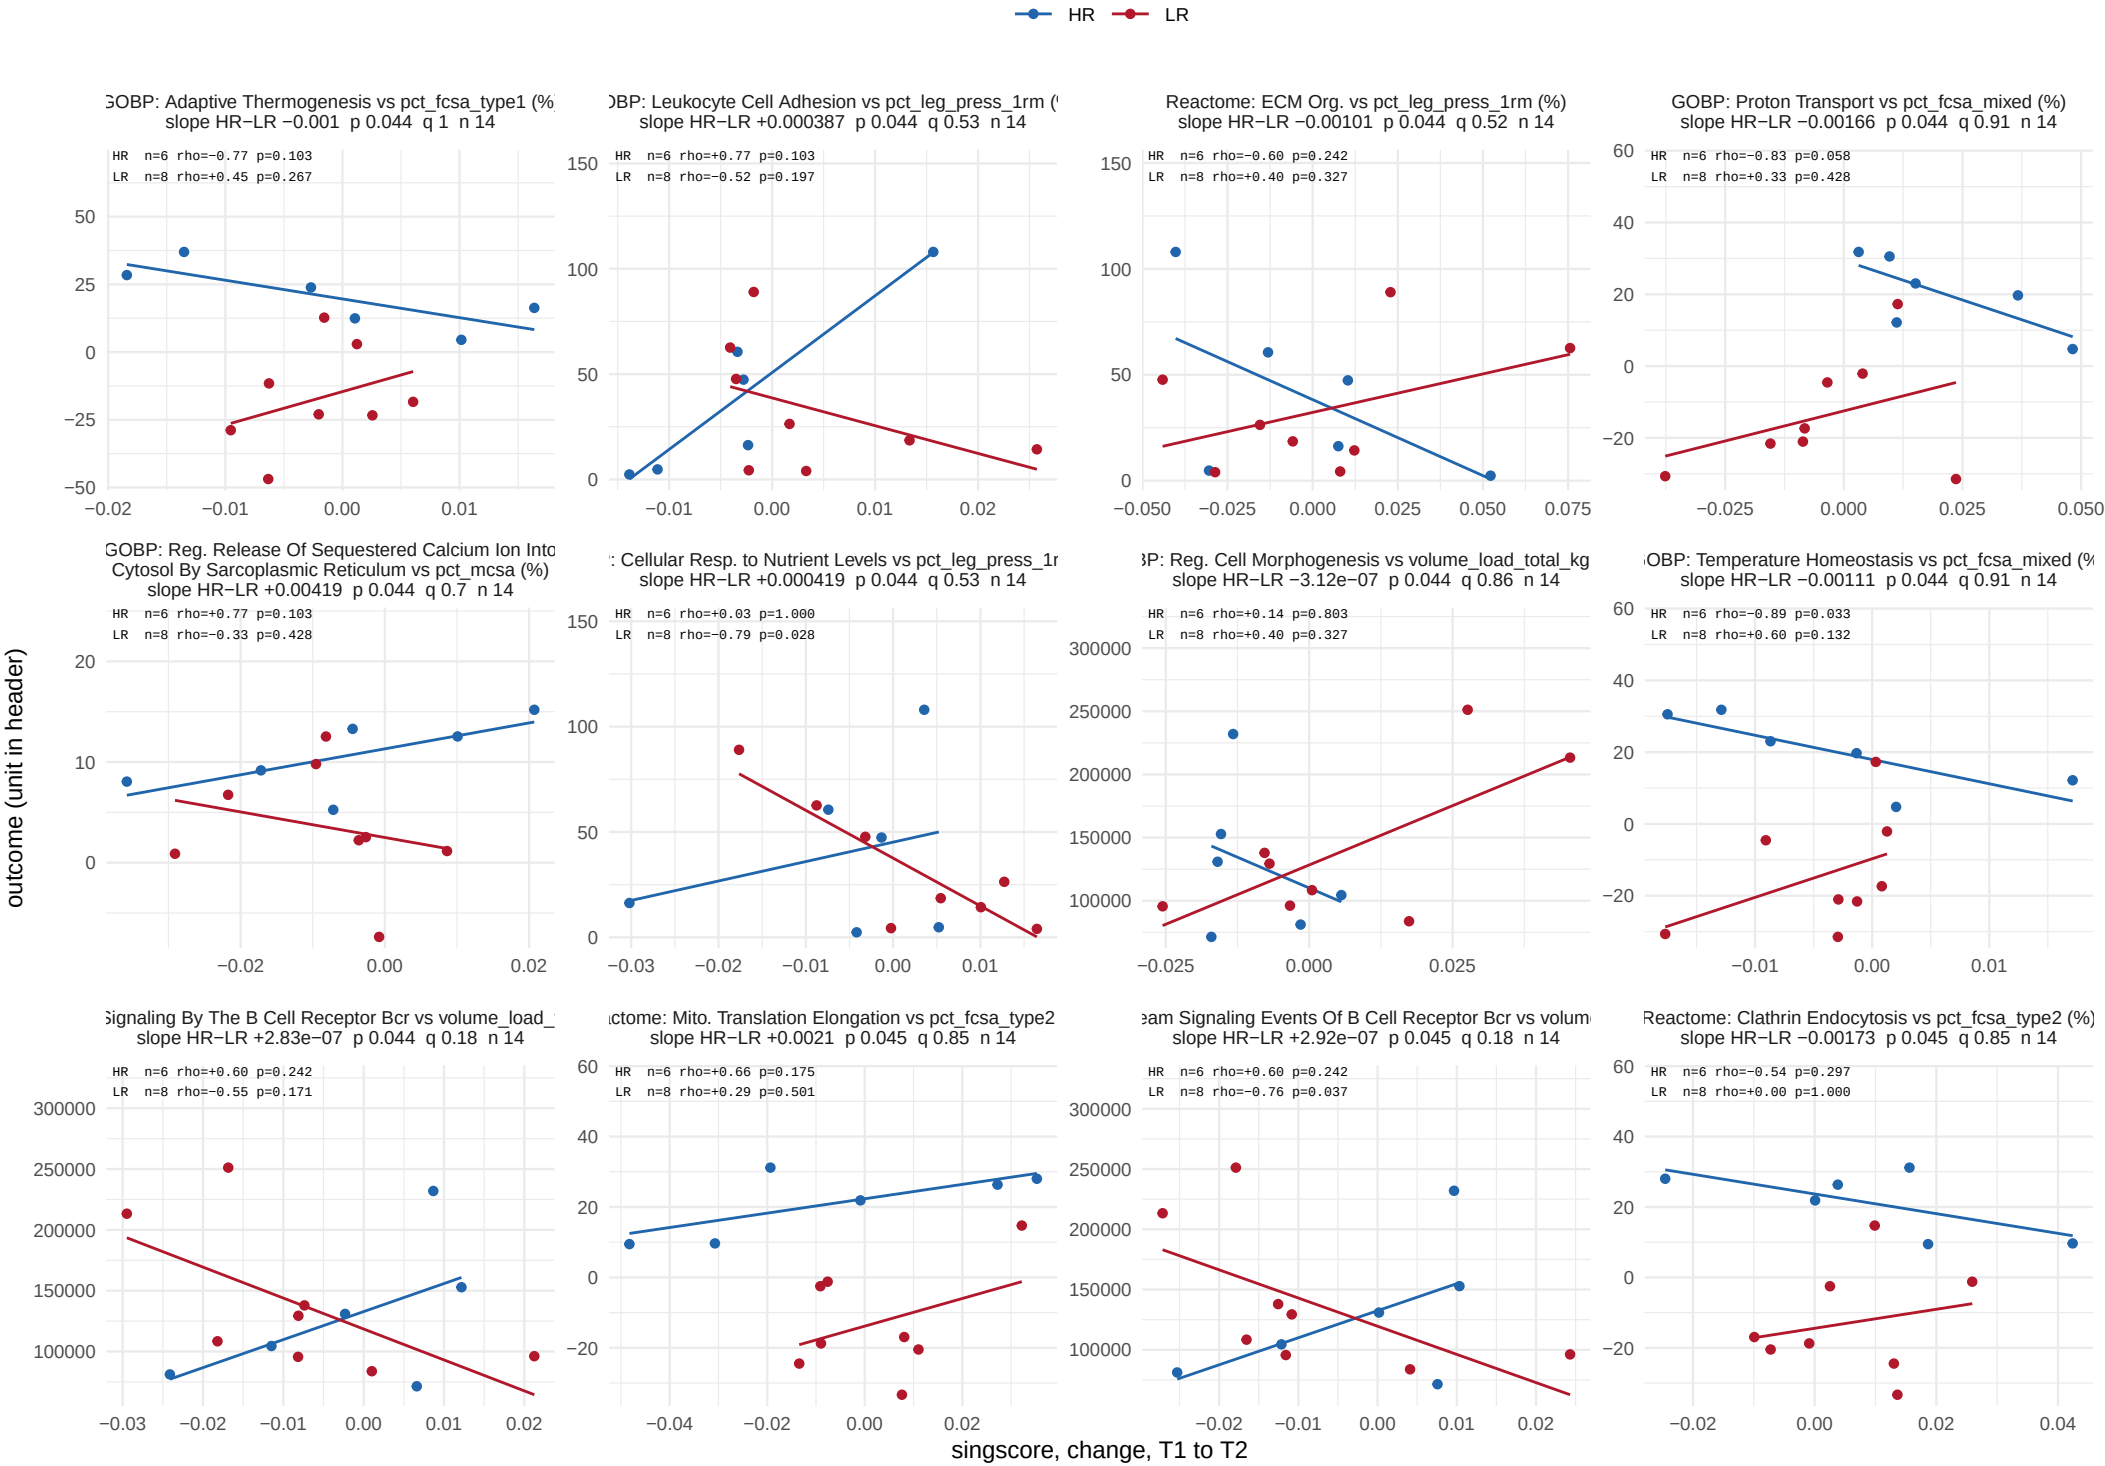


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, training window


506 of 11024 feature−outcome pairs at p < 0.05, 18 at BH < 0.05. Page 40 of 43.

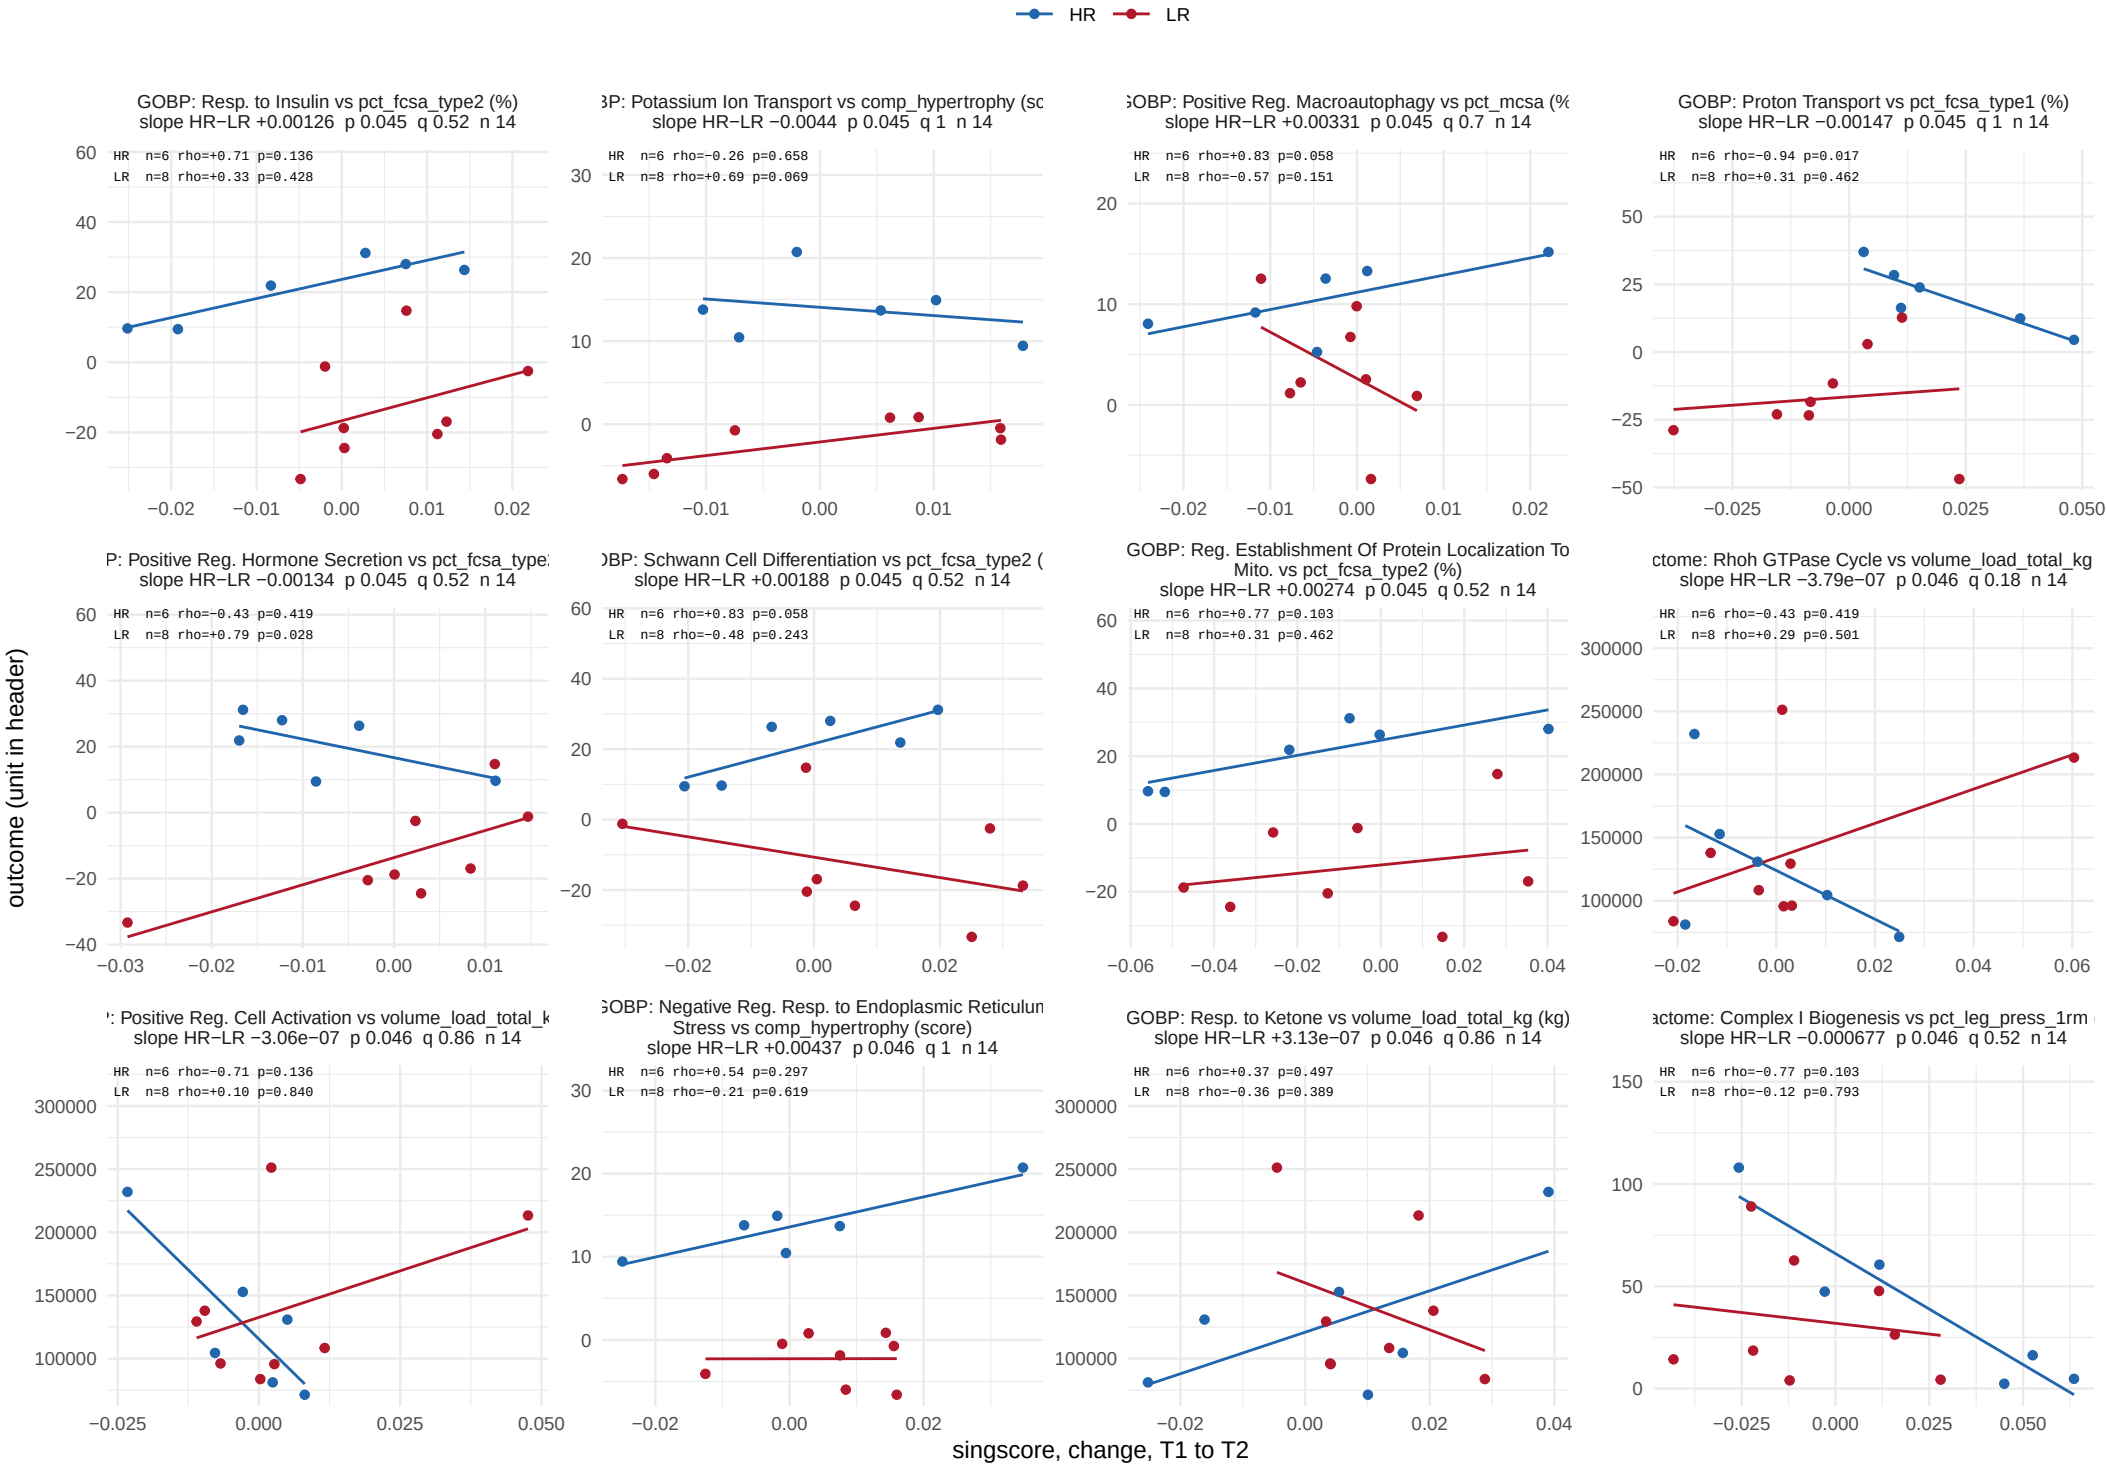


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, training window


506 of 11024 feature−outcome pairs at p < 0.05, 18 at BH < 0.05. Page 41 of 43.

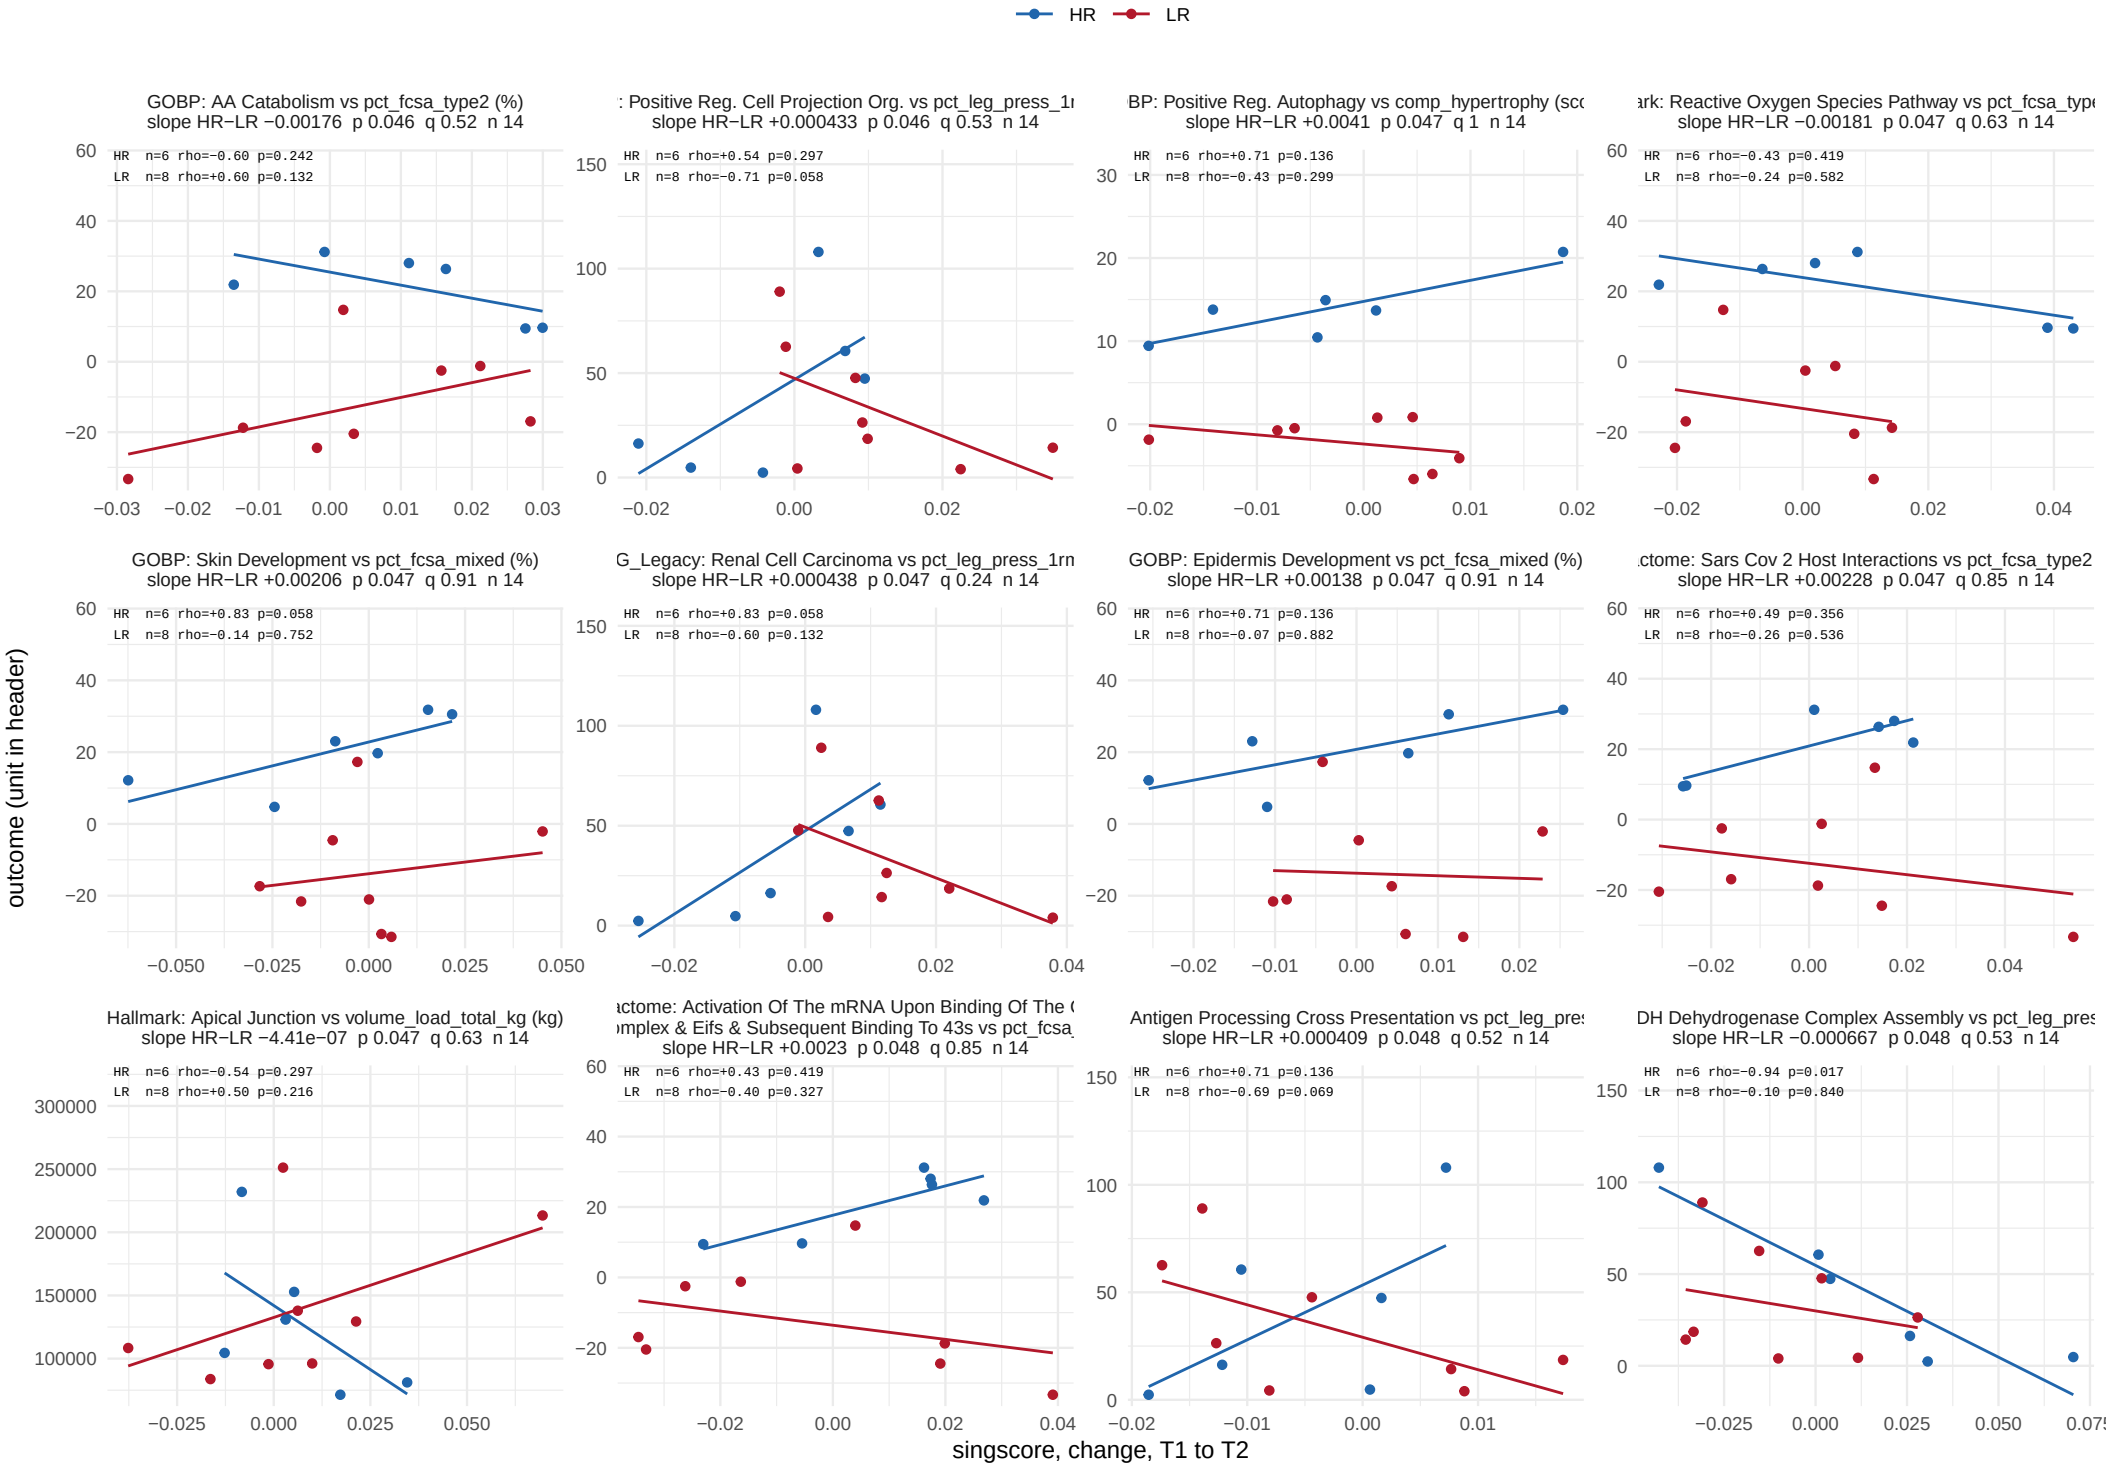


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, training window


506 of 11024 feature−outcome pairs at p < 0.05, 18 at BH < 0.05. Page 42 of 43.

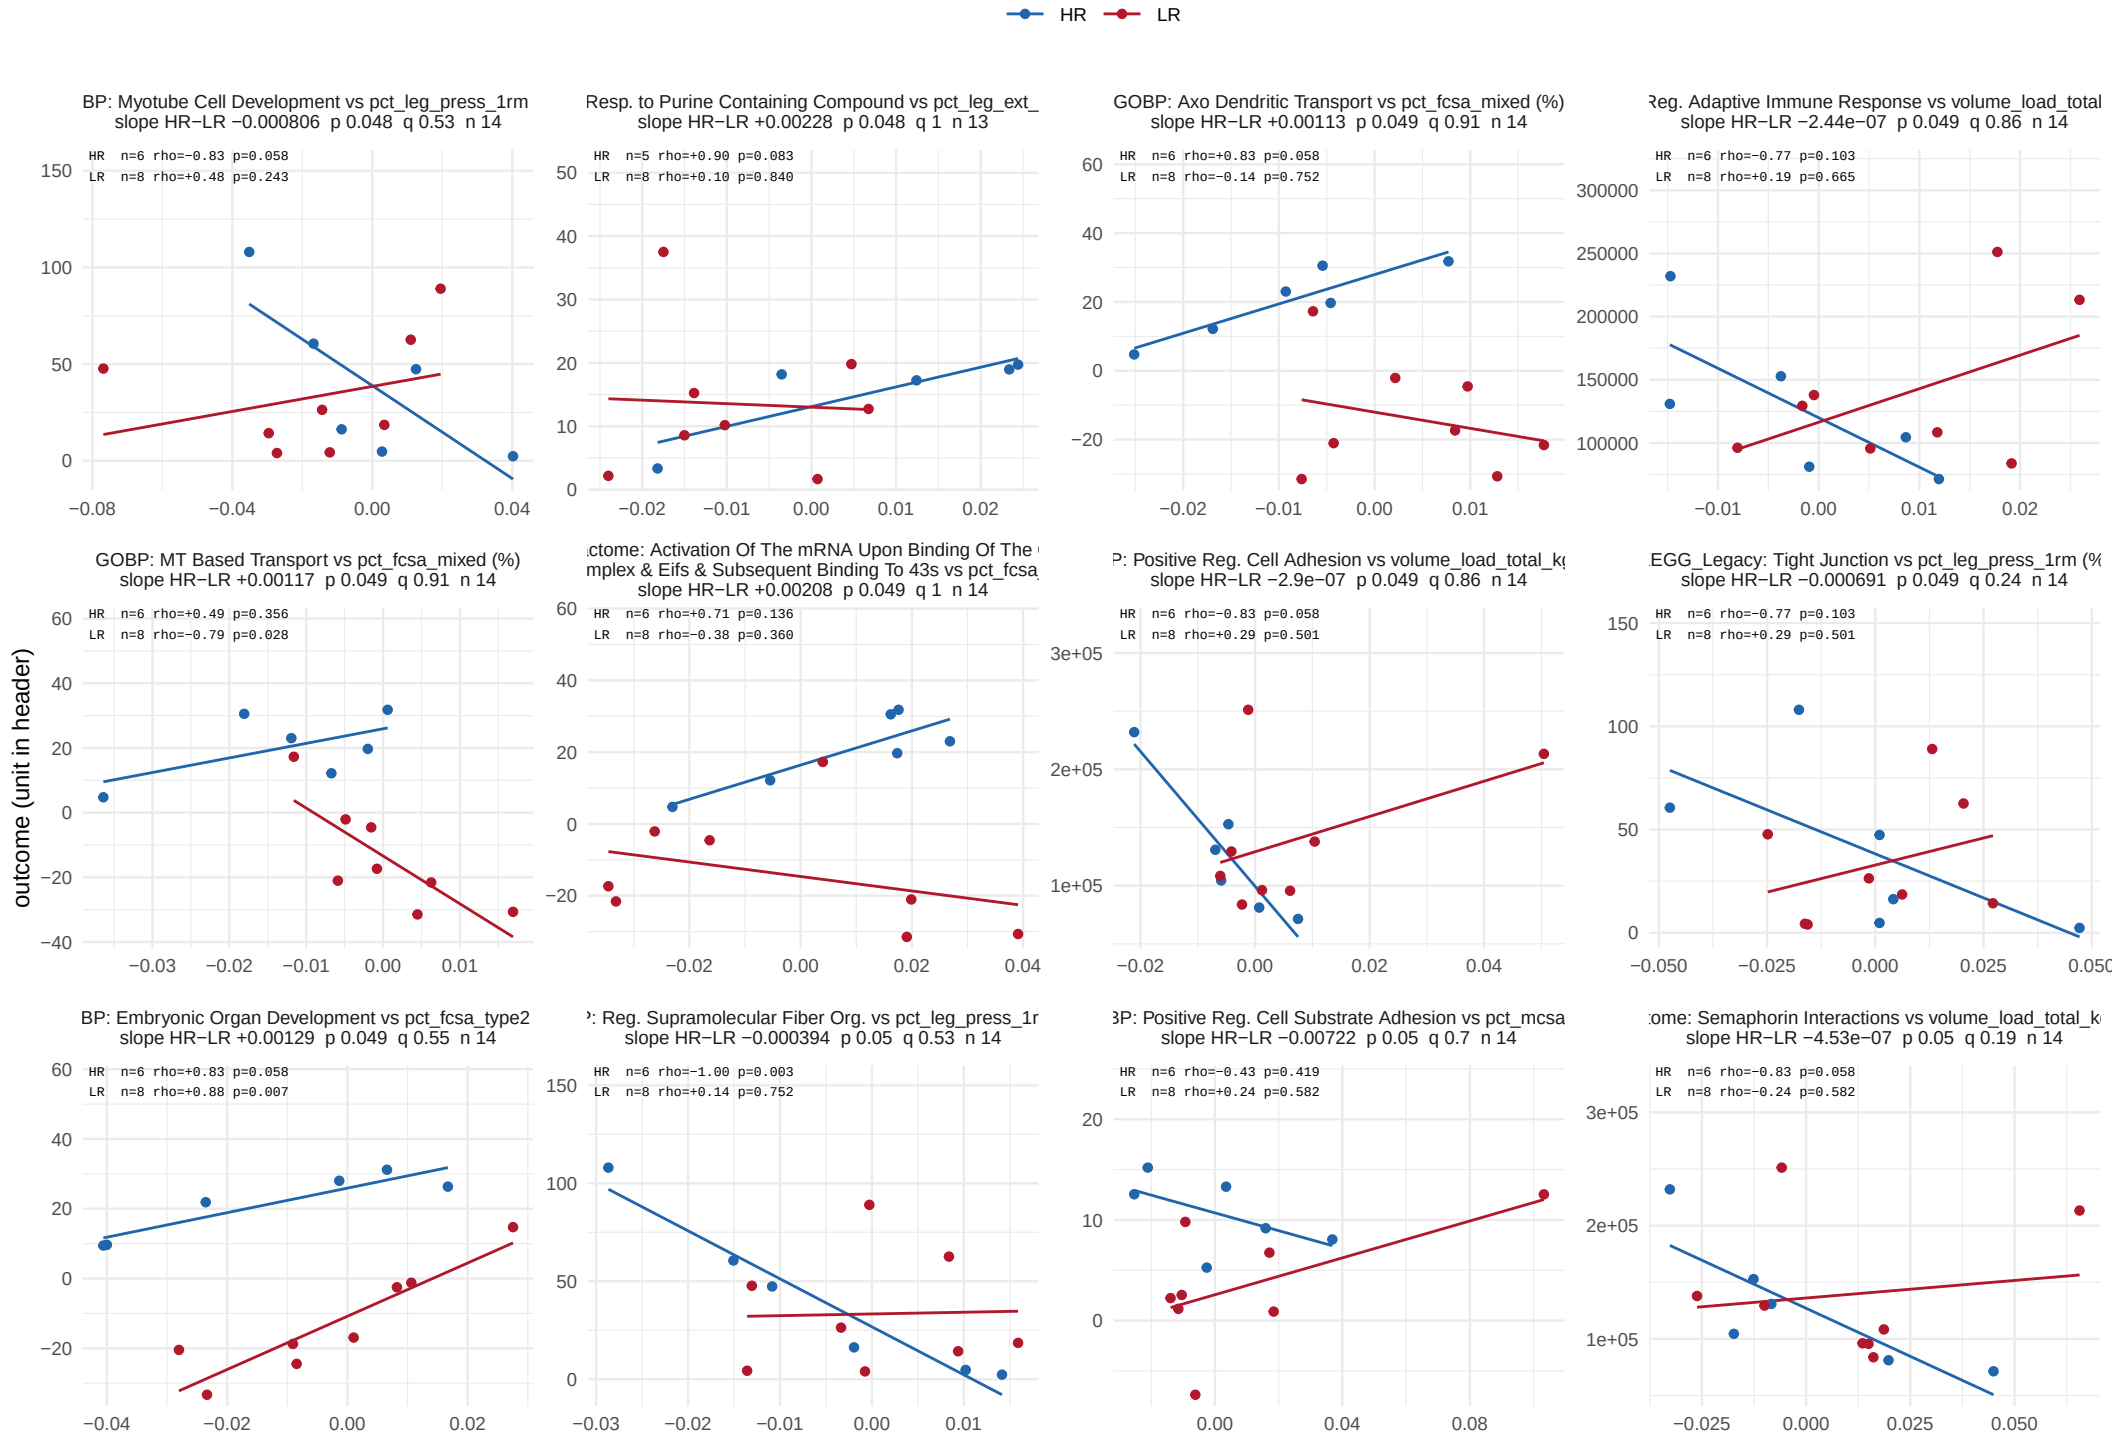


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

# Arm difference, training window


506 of 11024 feature−outcome pairs at p < 0.05, 18 at BH < 0.05. Page 43 of 43.

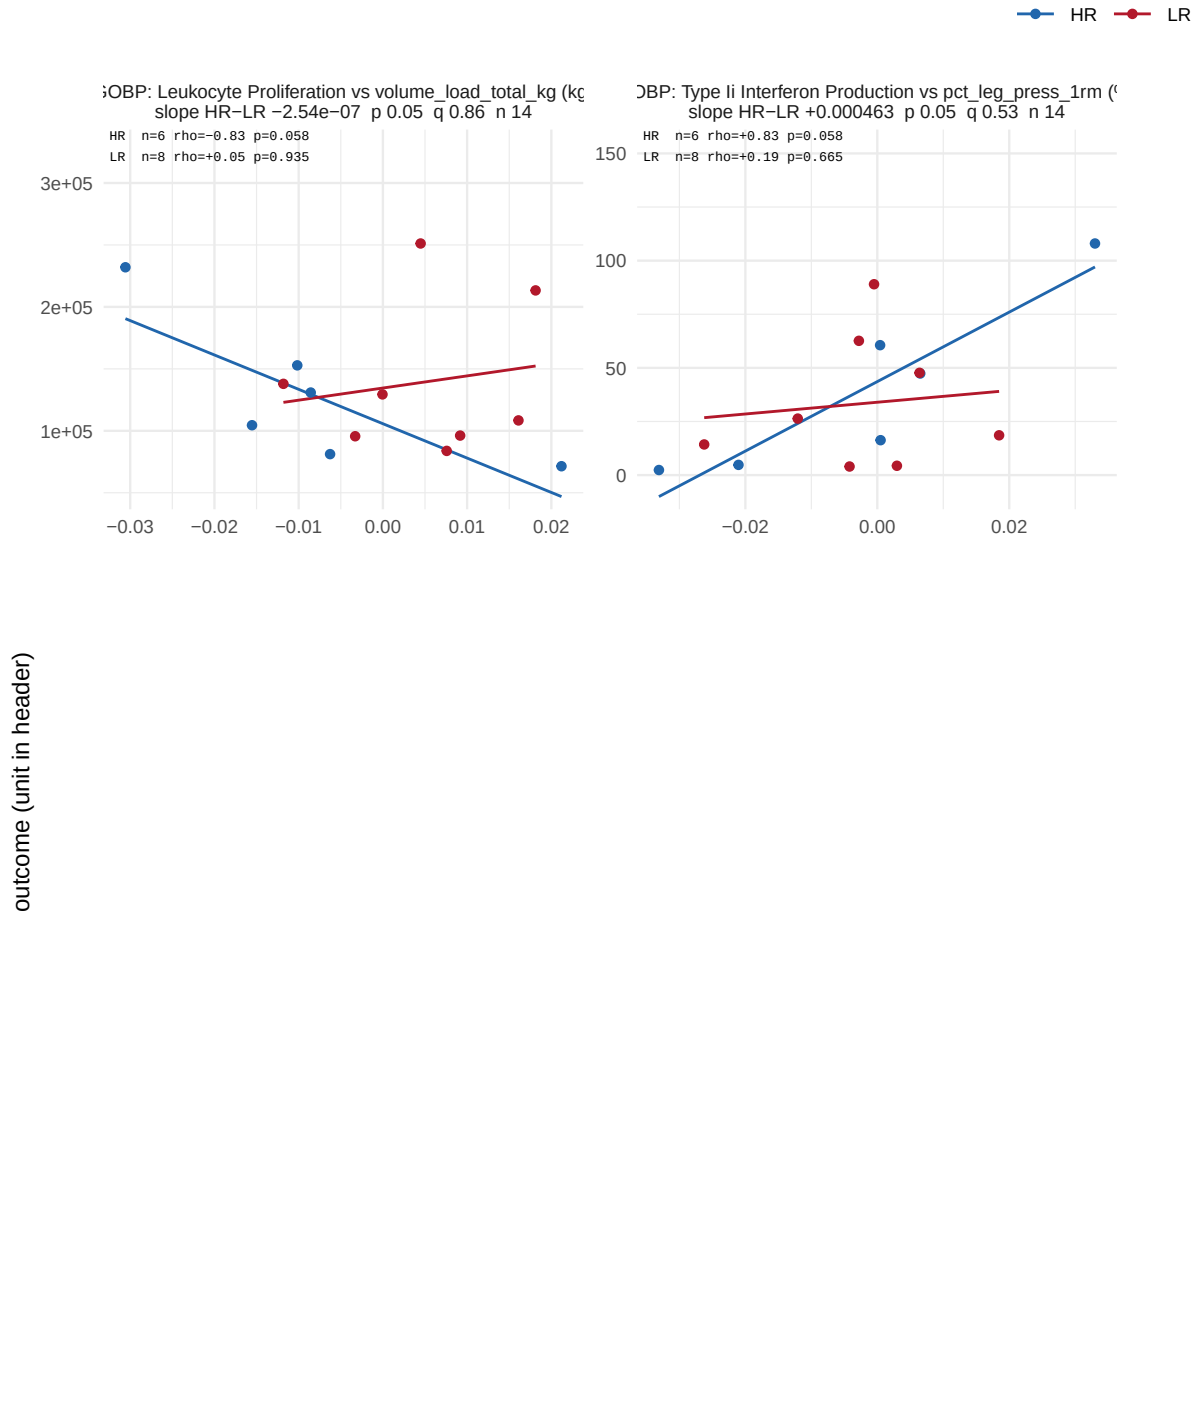


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, baseline window


382 of 11024 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 1 of 32.

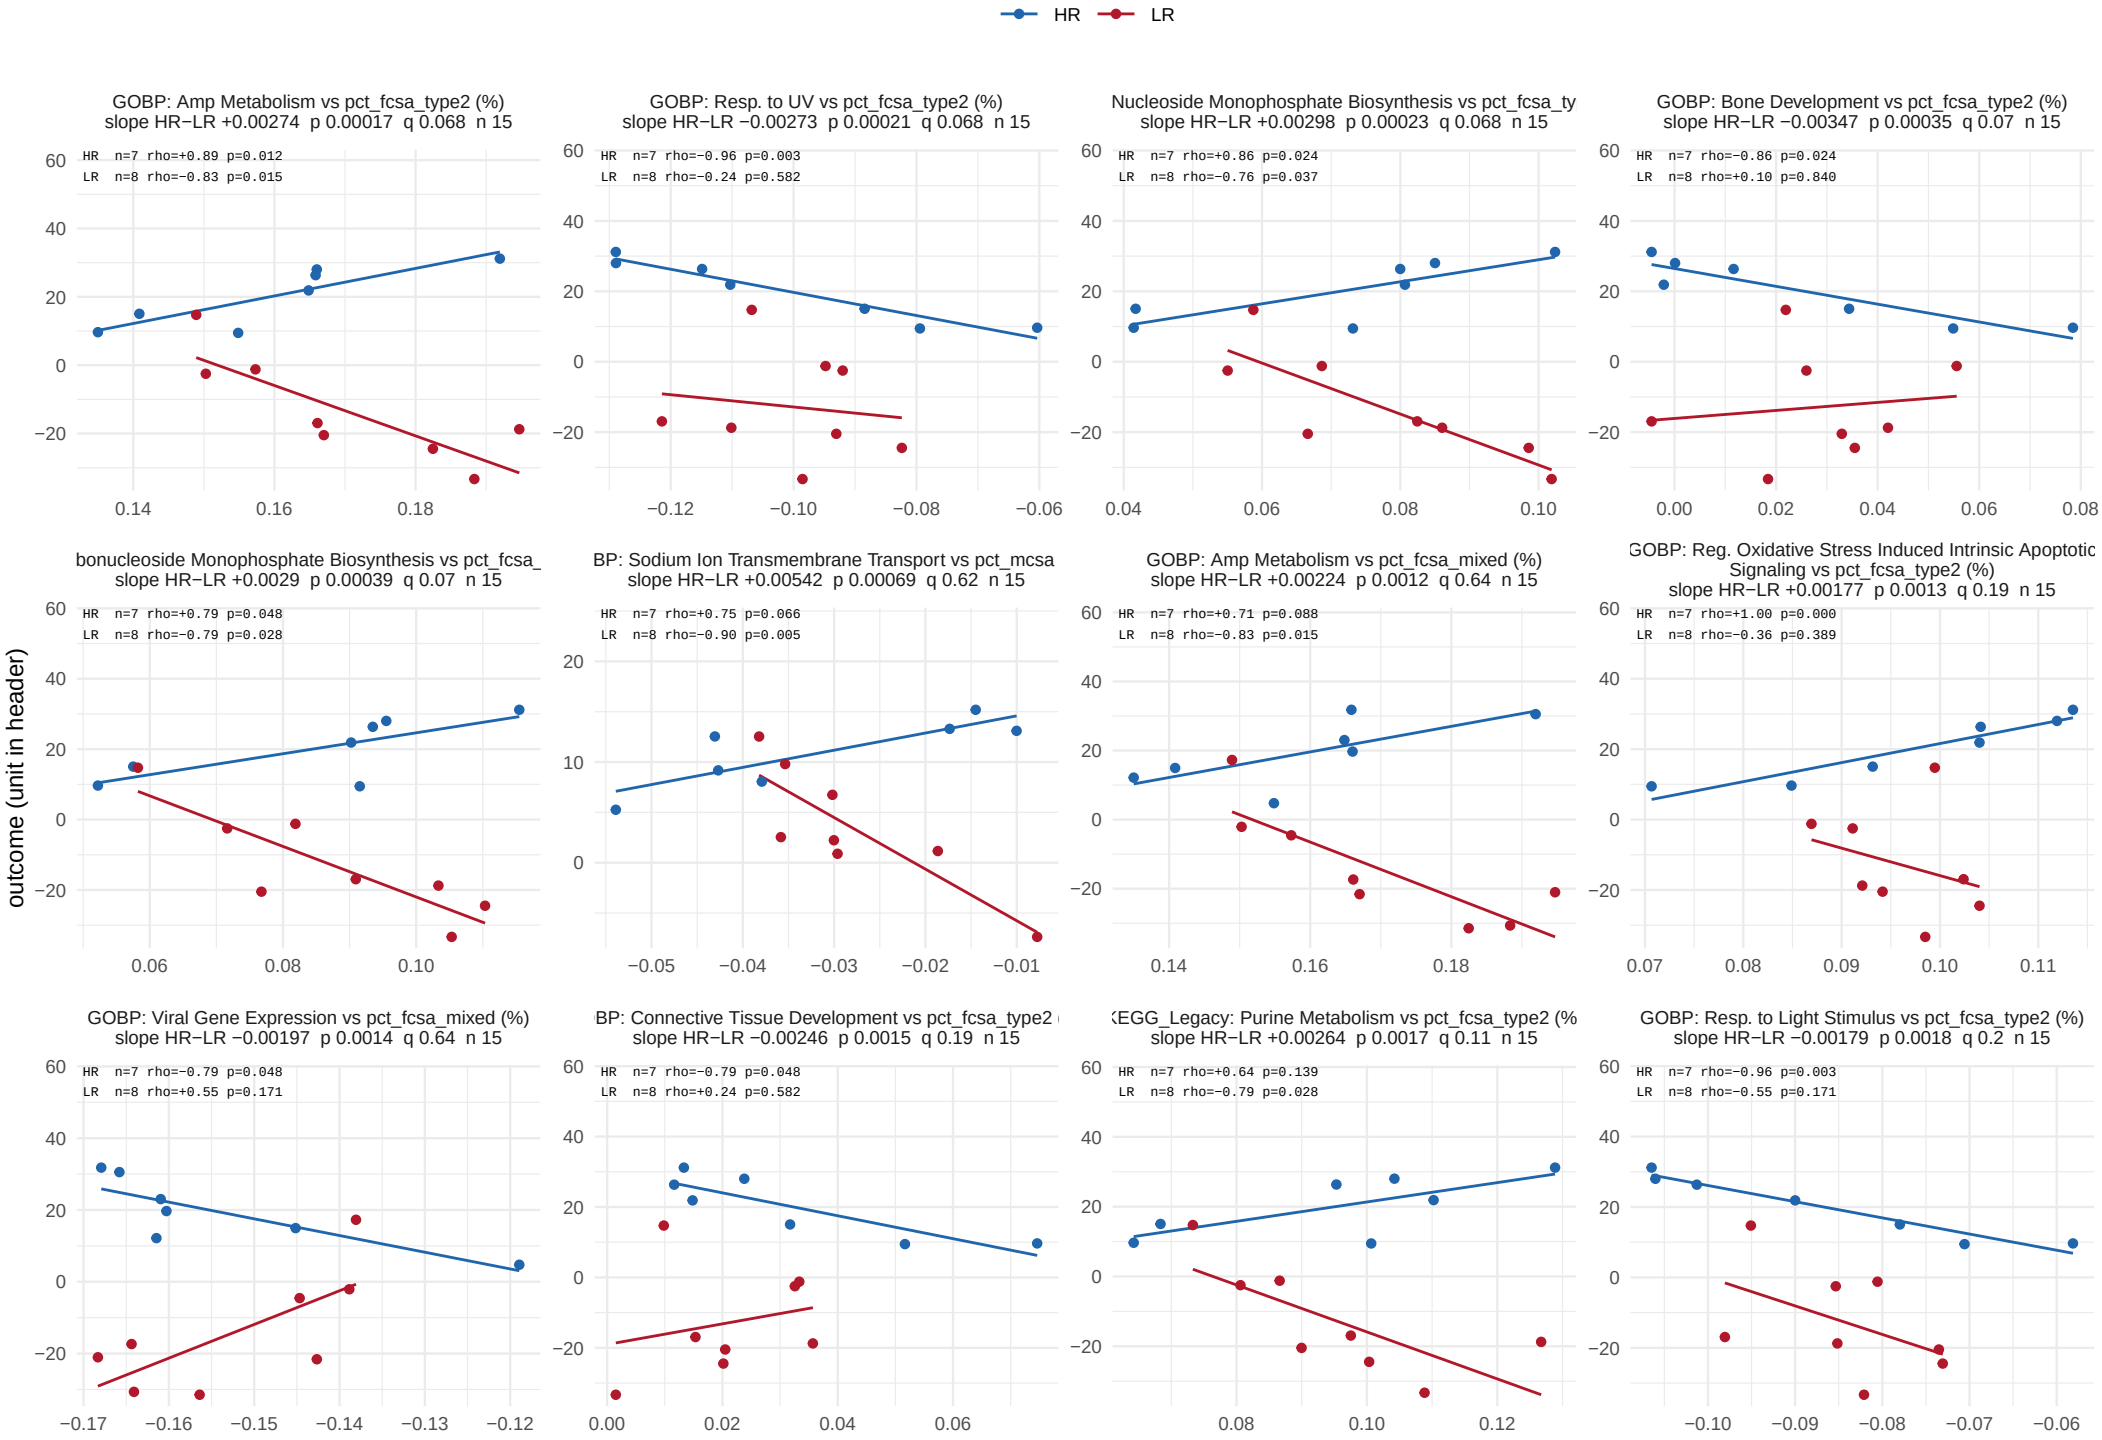


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, baseline window


382 of 11024 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 2 of 32.

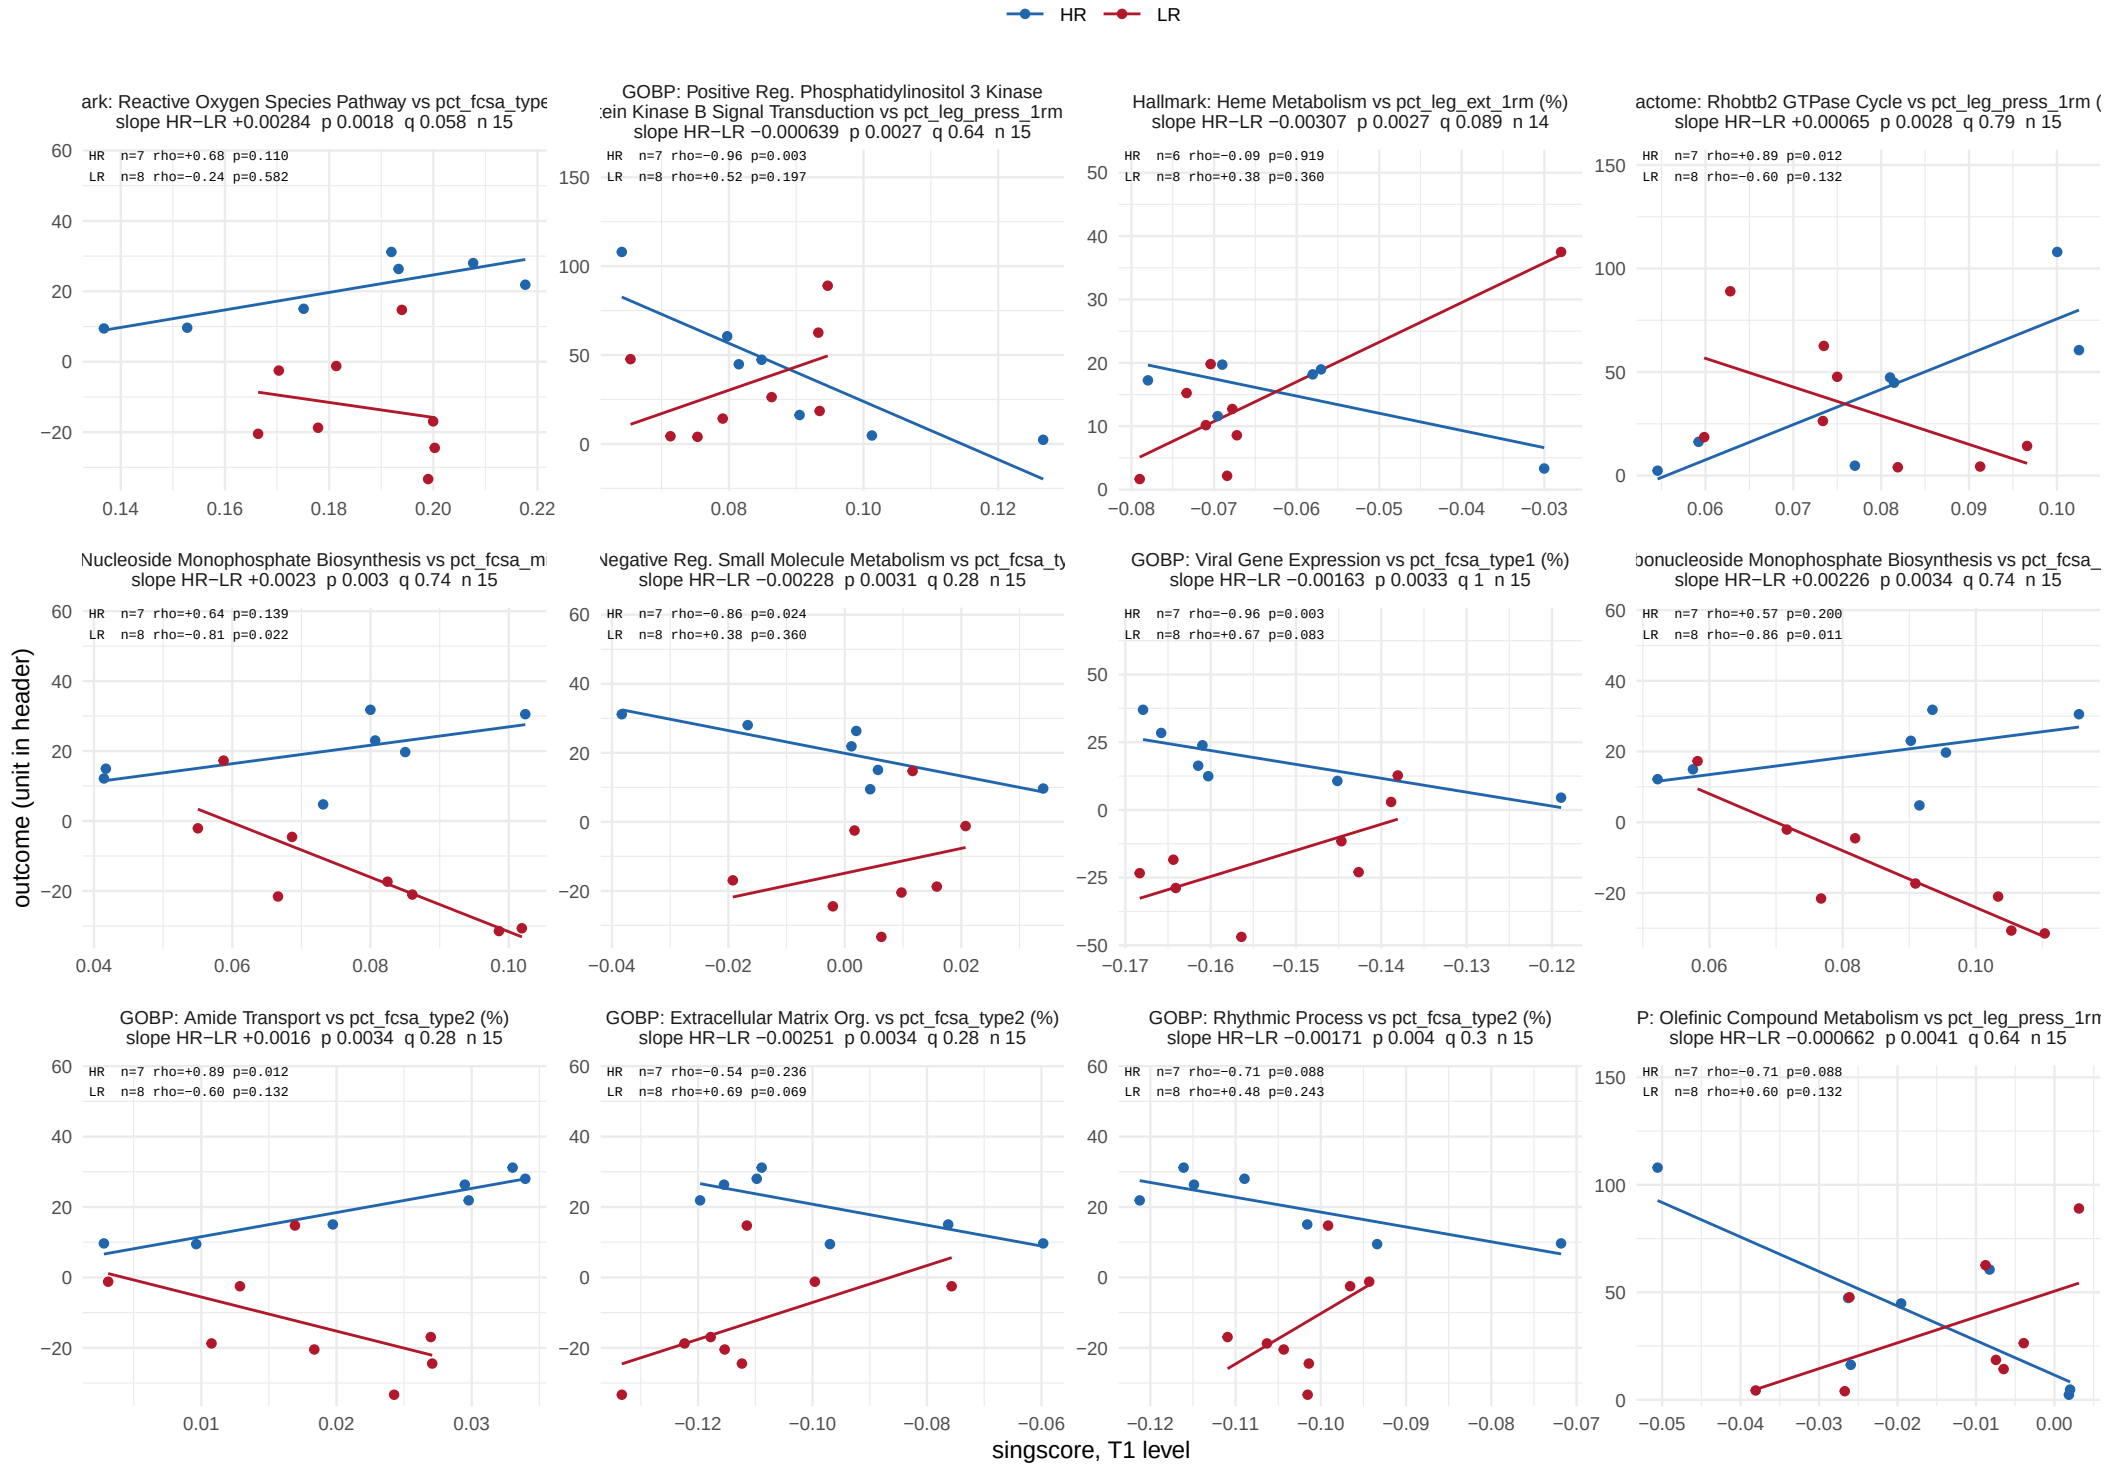


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, baseline window


382 of 11024 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 3 of 32.

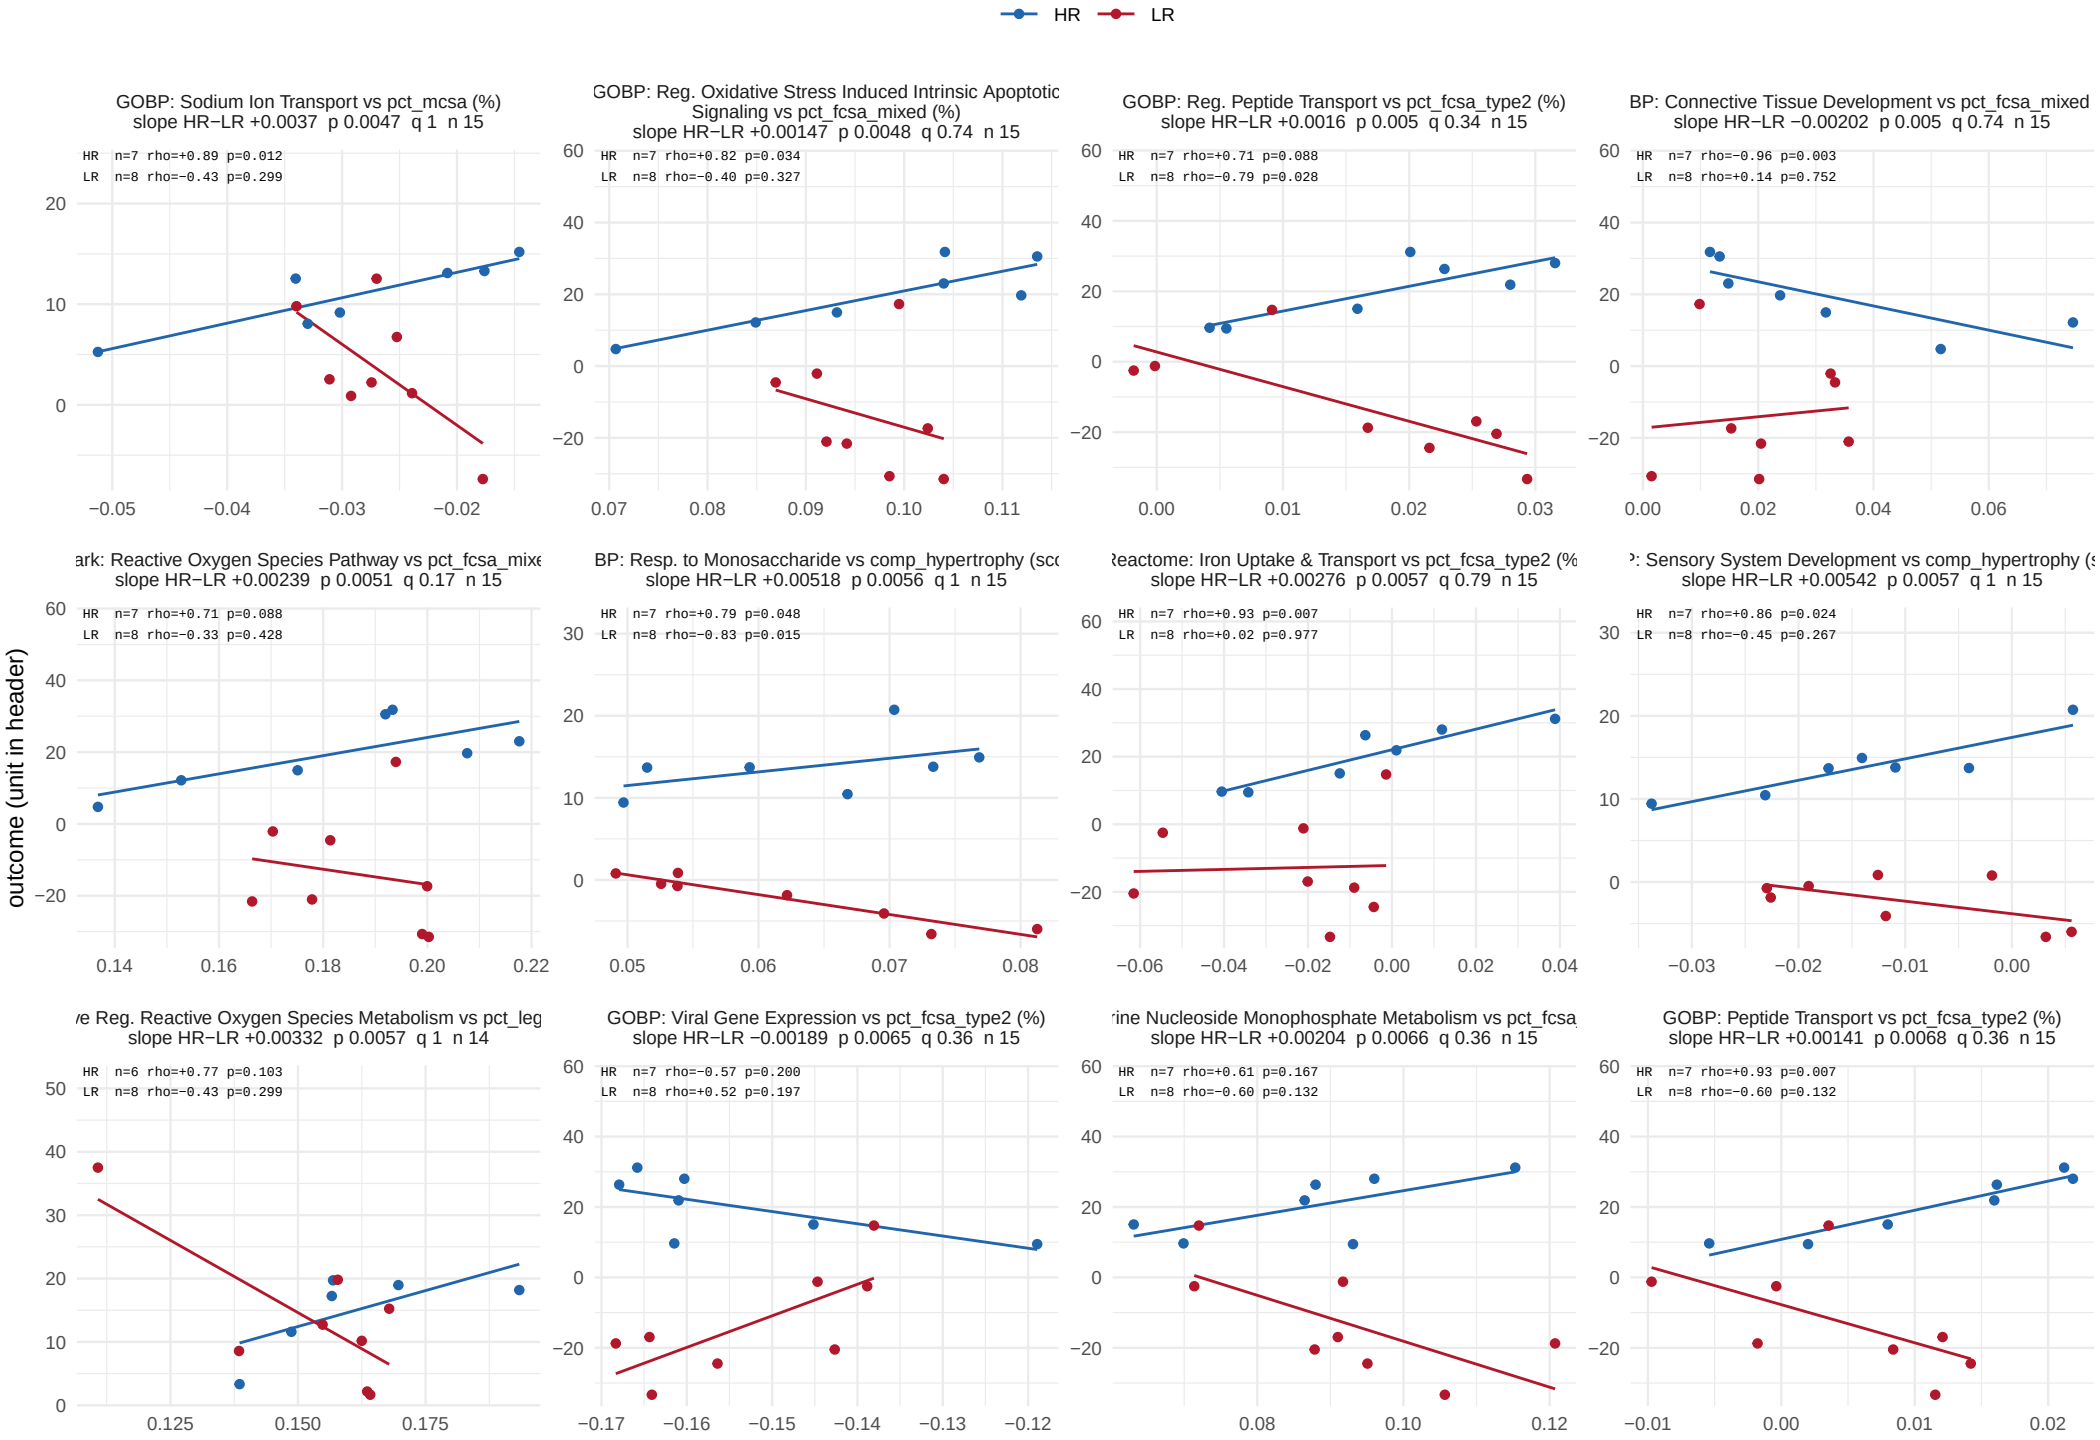


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, baseline window


382 of 11024 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 4 of 32.

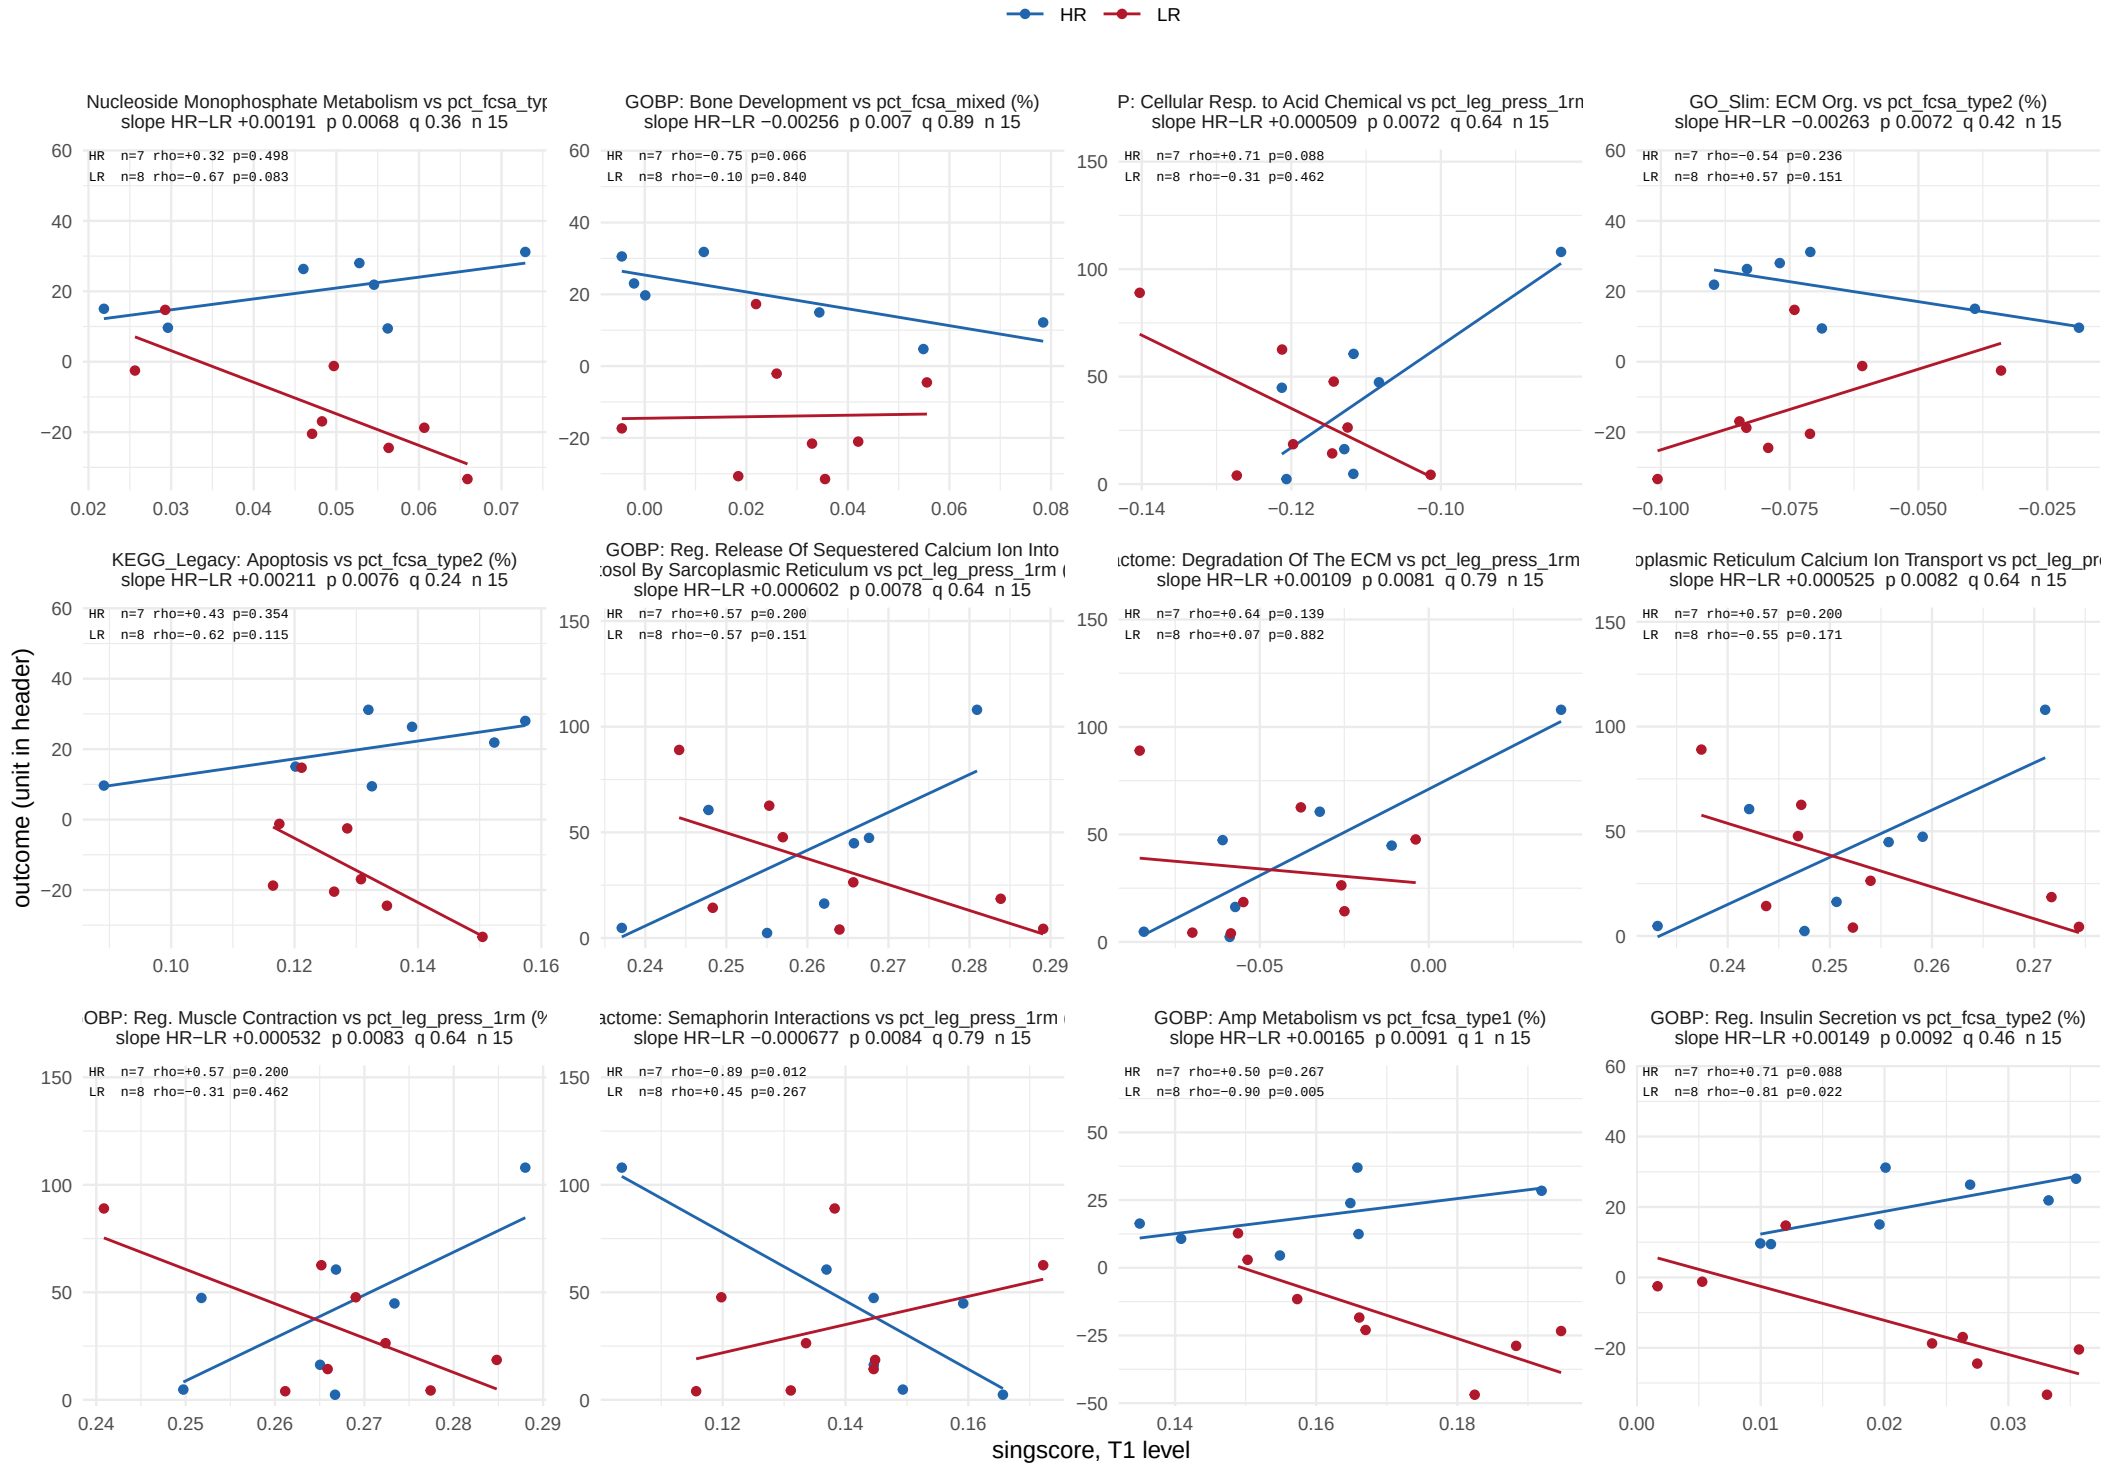


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, baseline window


382 of 11024 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 5 of 32.

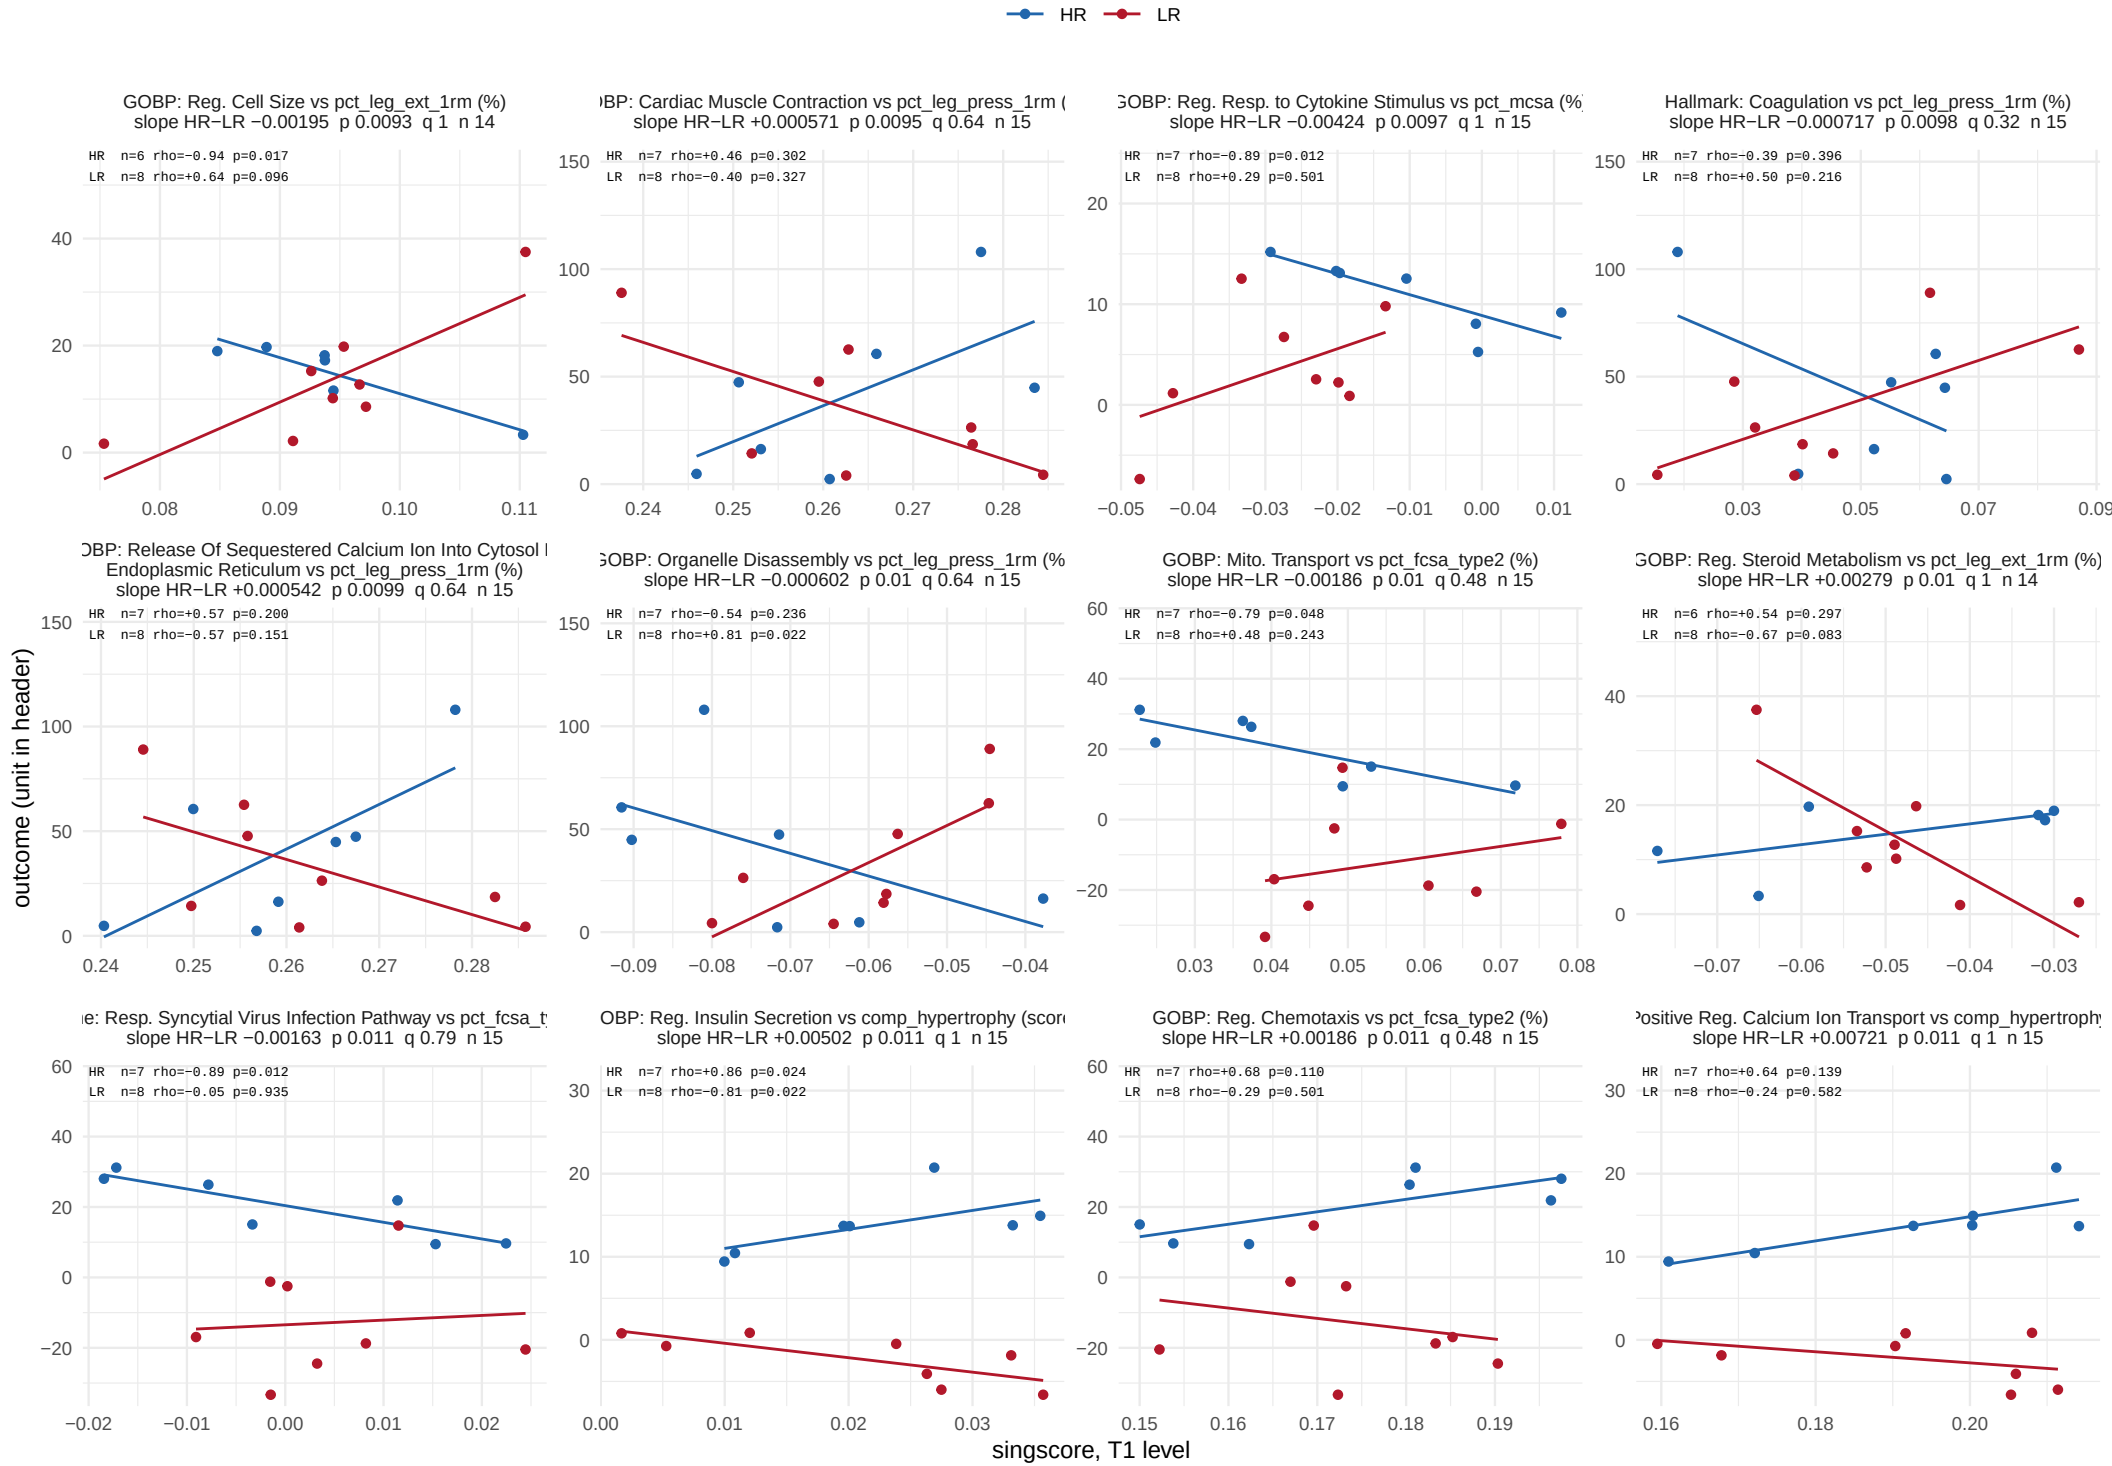


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, baseline window


382 of 11024 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 6 of 32.

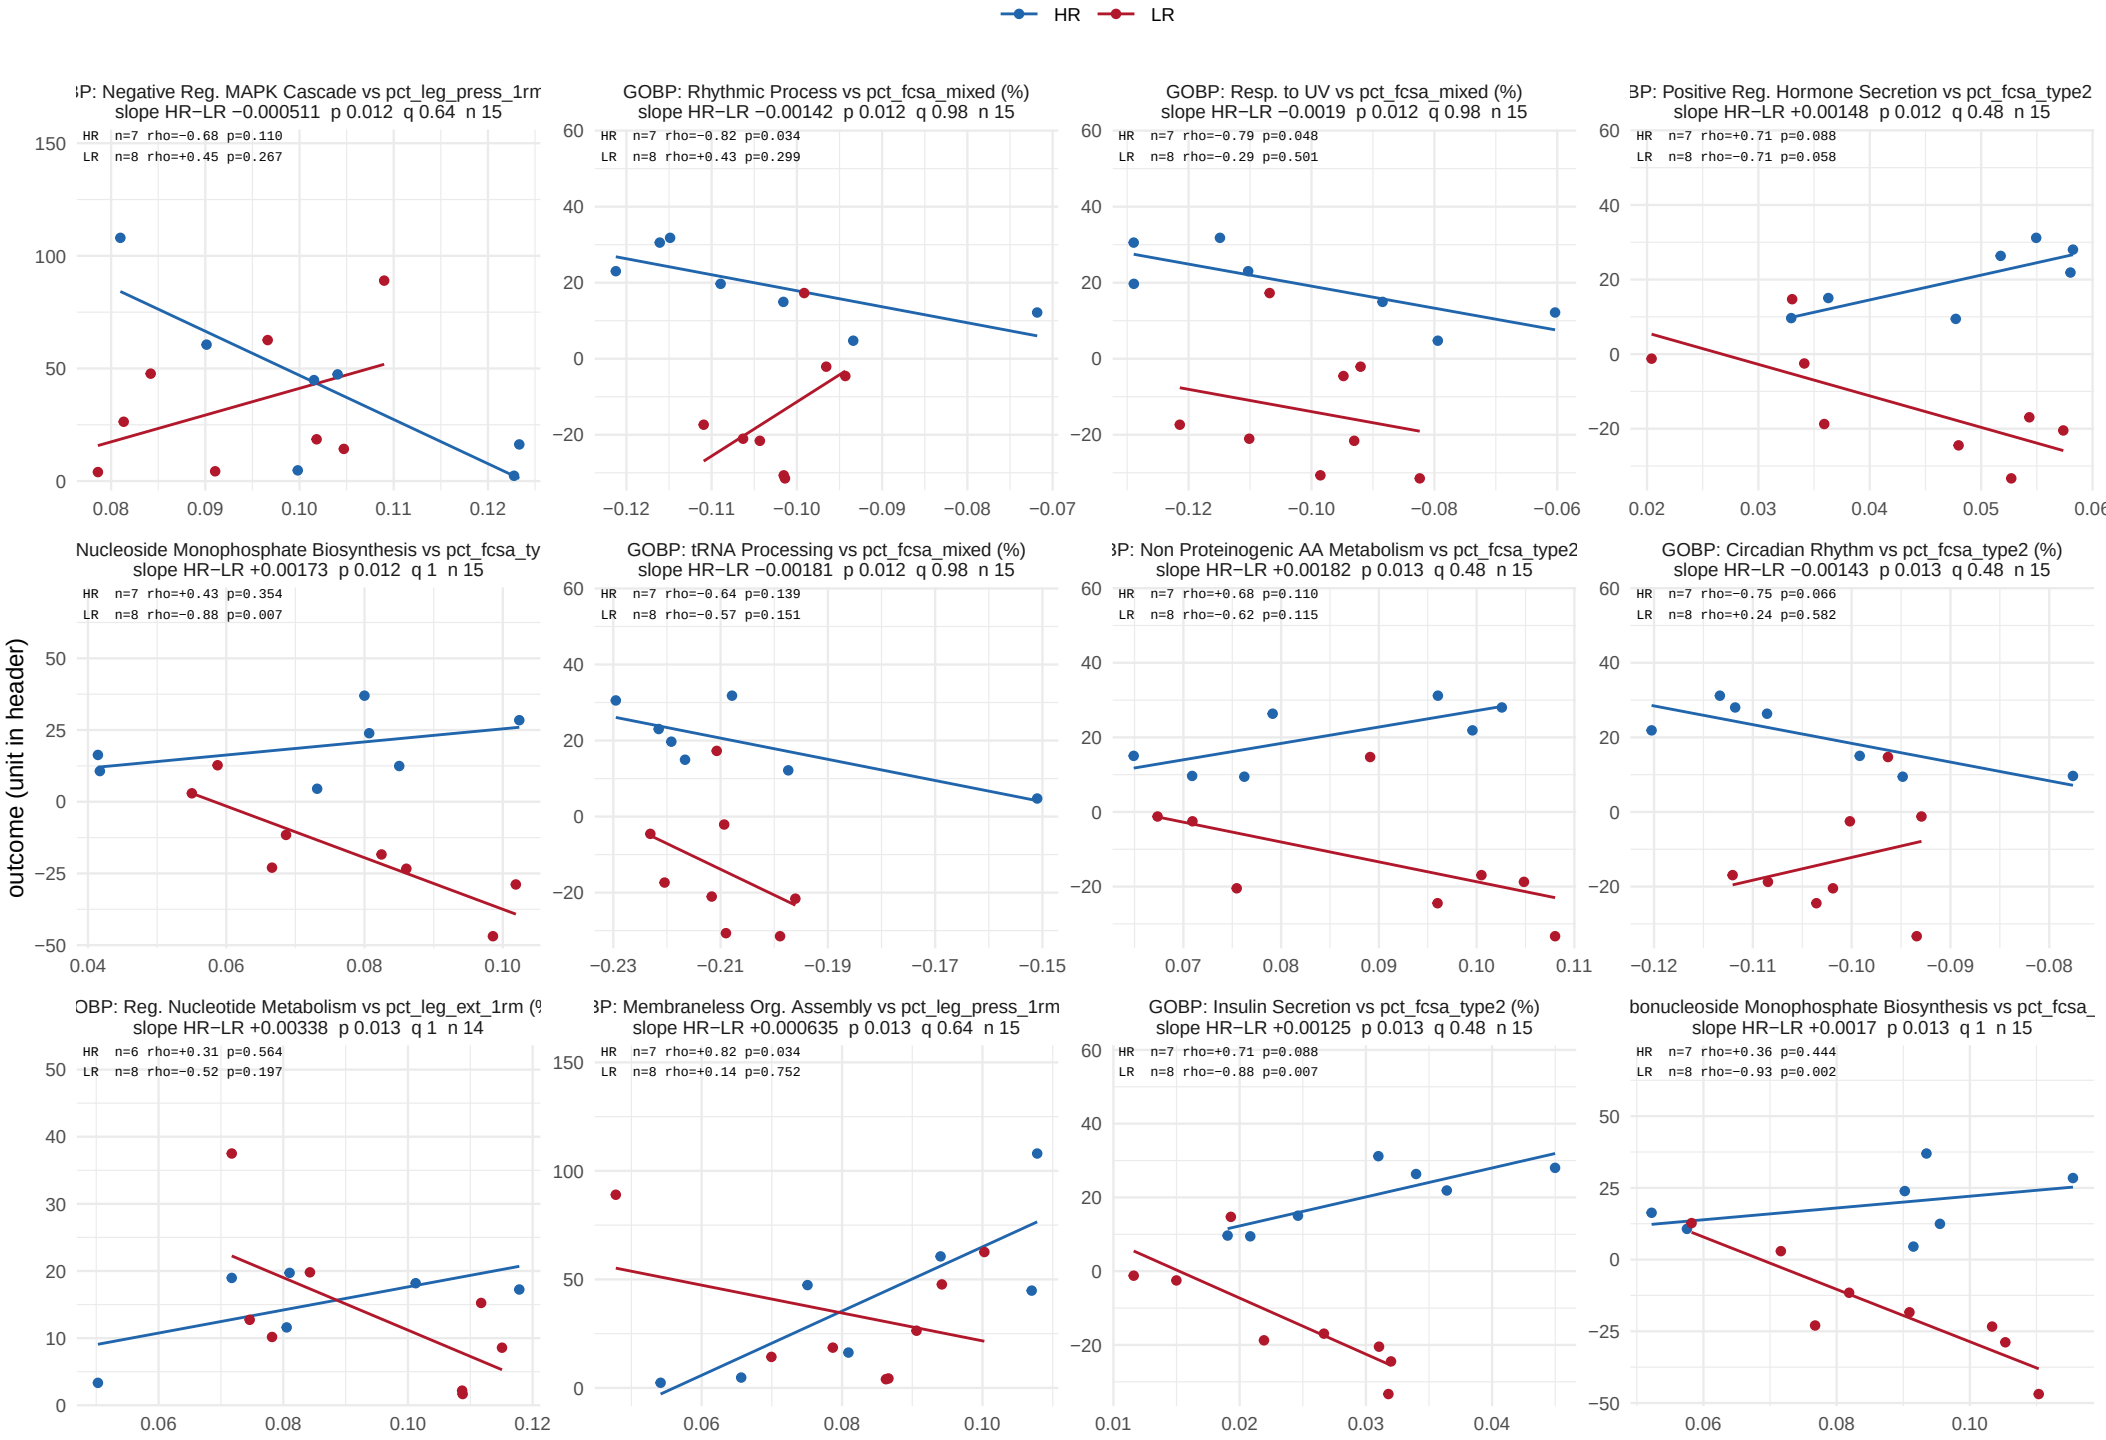


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, baseline window


382 of 11024 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 7 of 32.

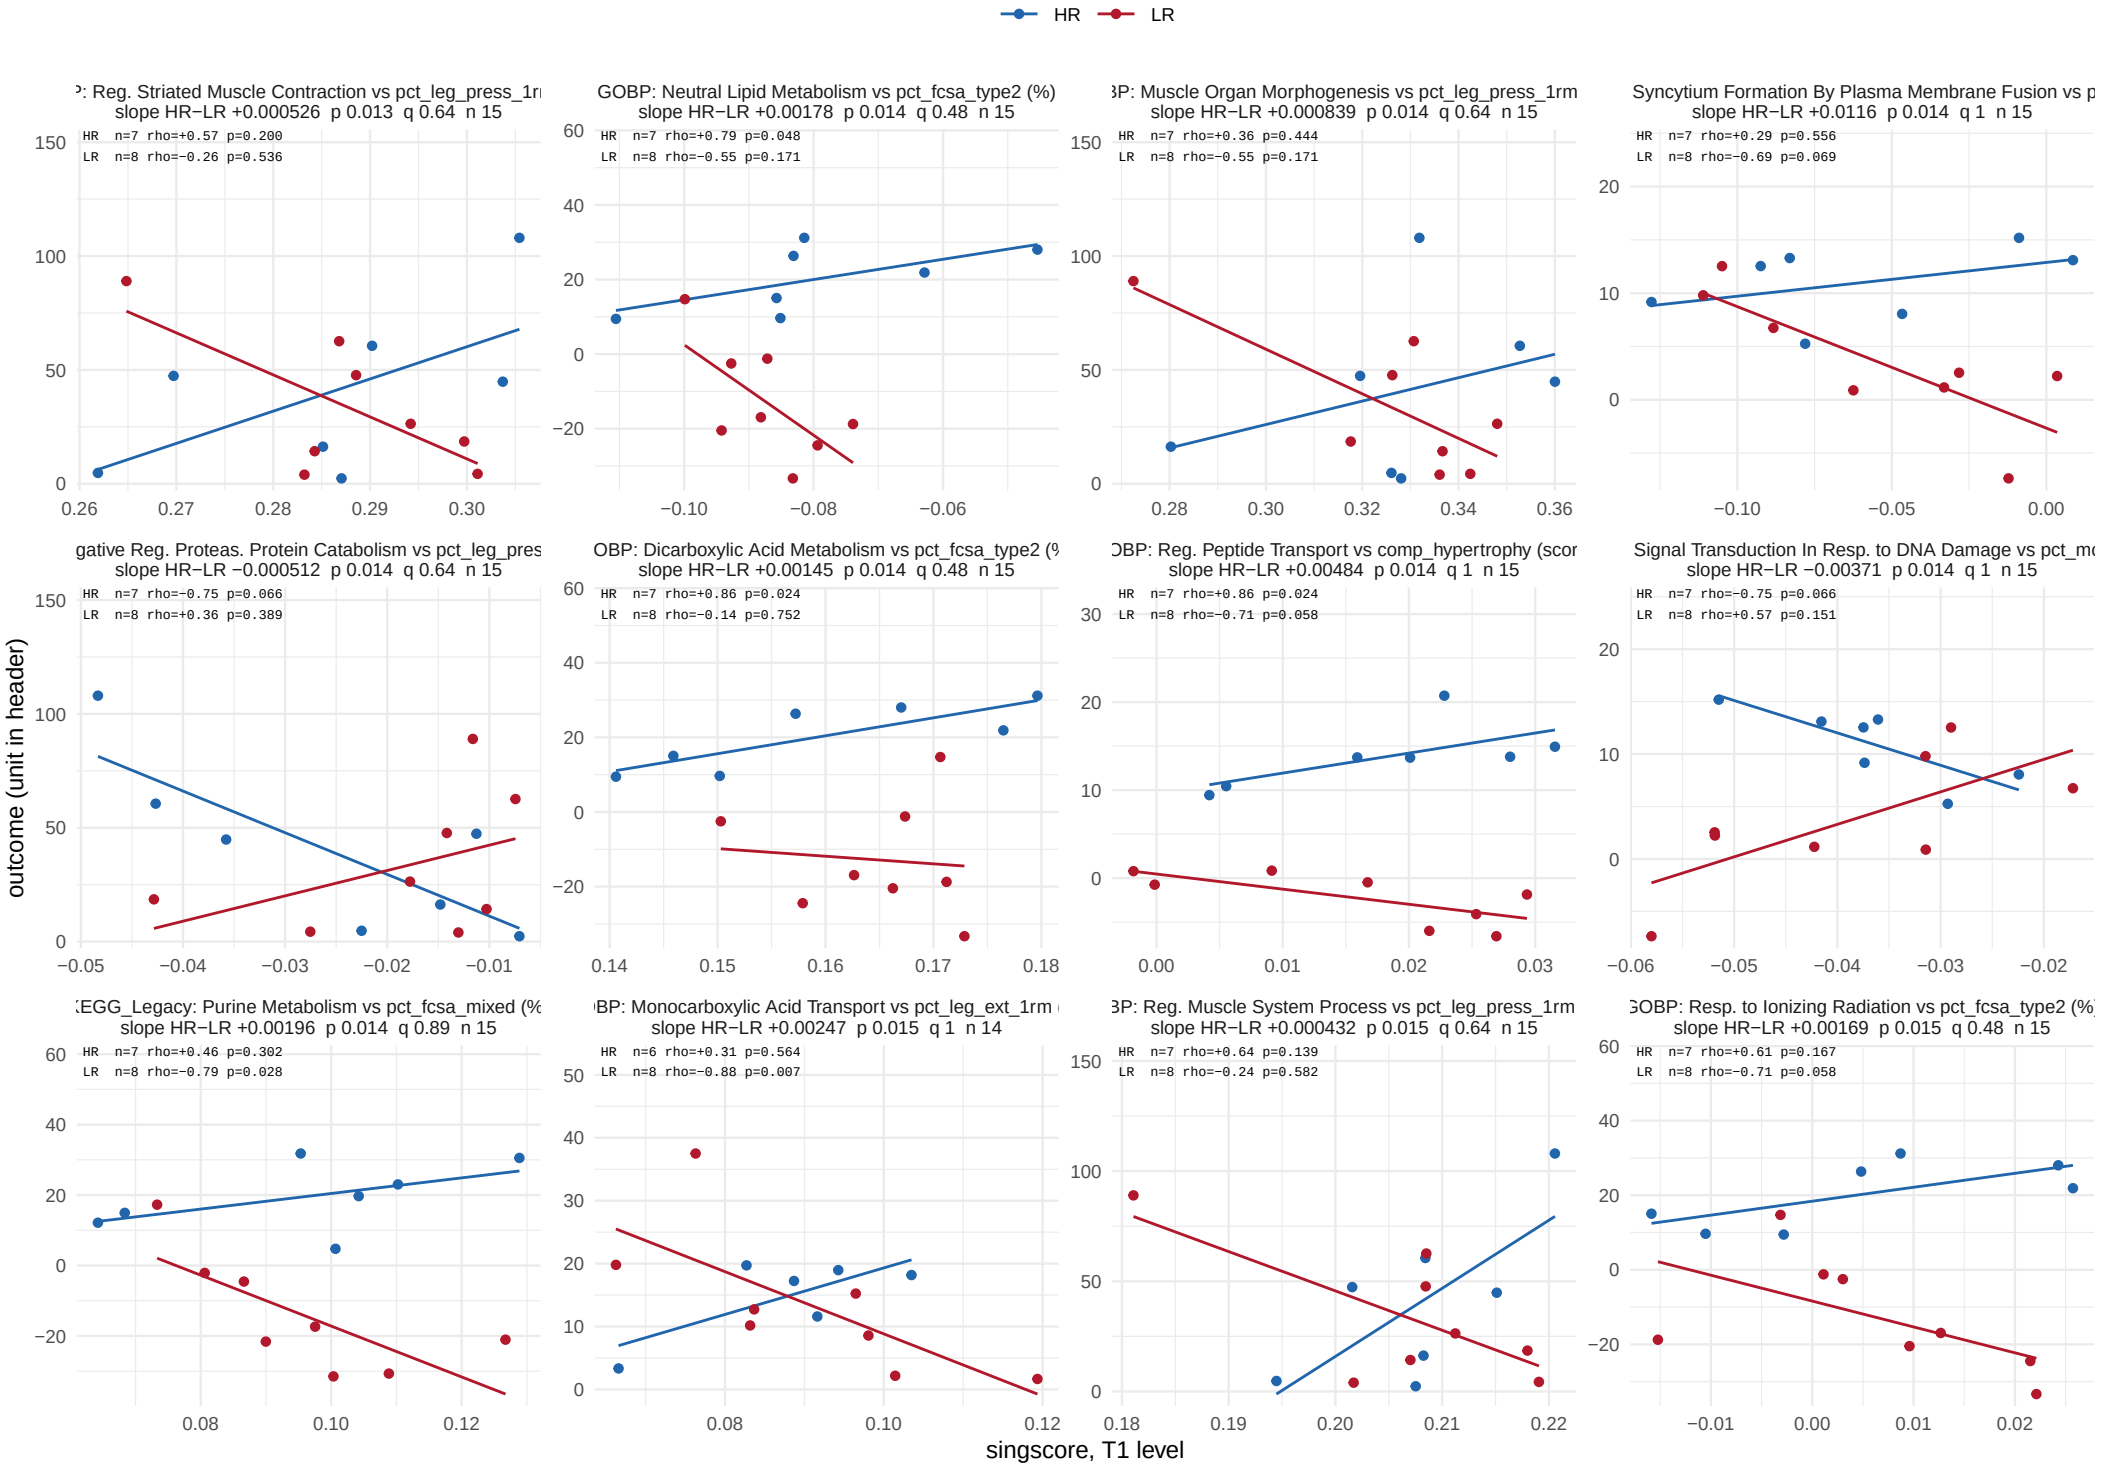


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

# Arm difference, baseline window


382 of 11024 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 8 of 32.

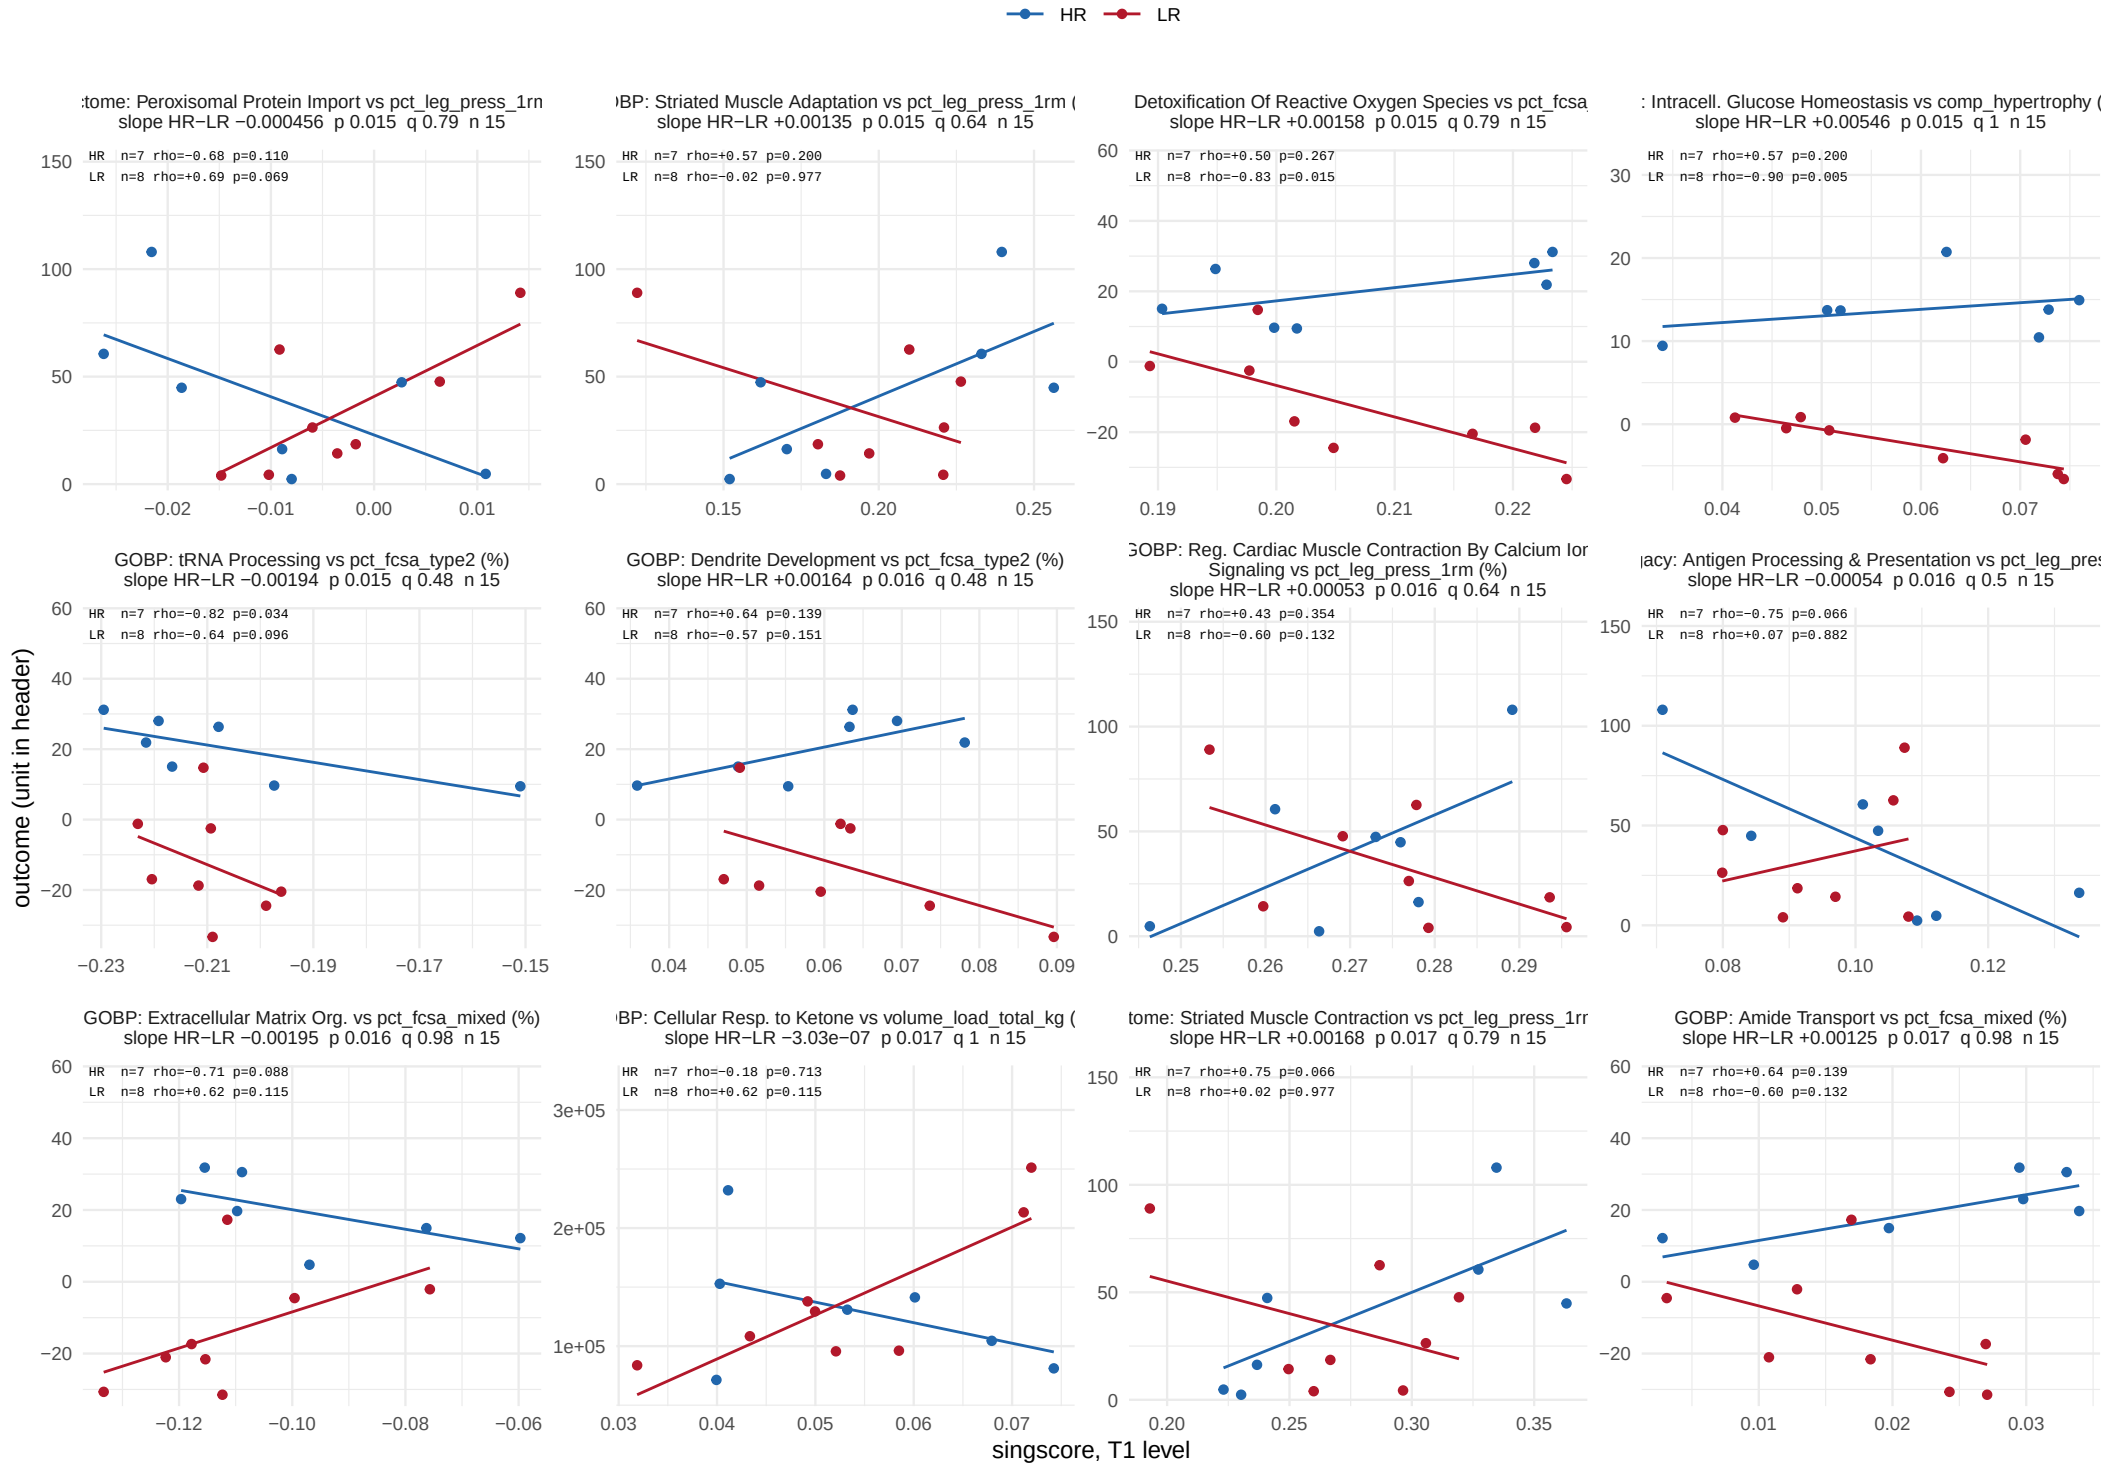


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, baseline window


382 of 11024 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 9 of 32.

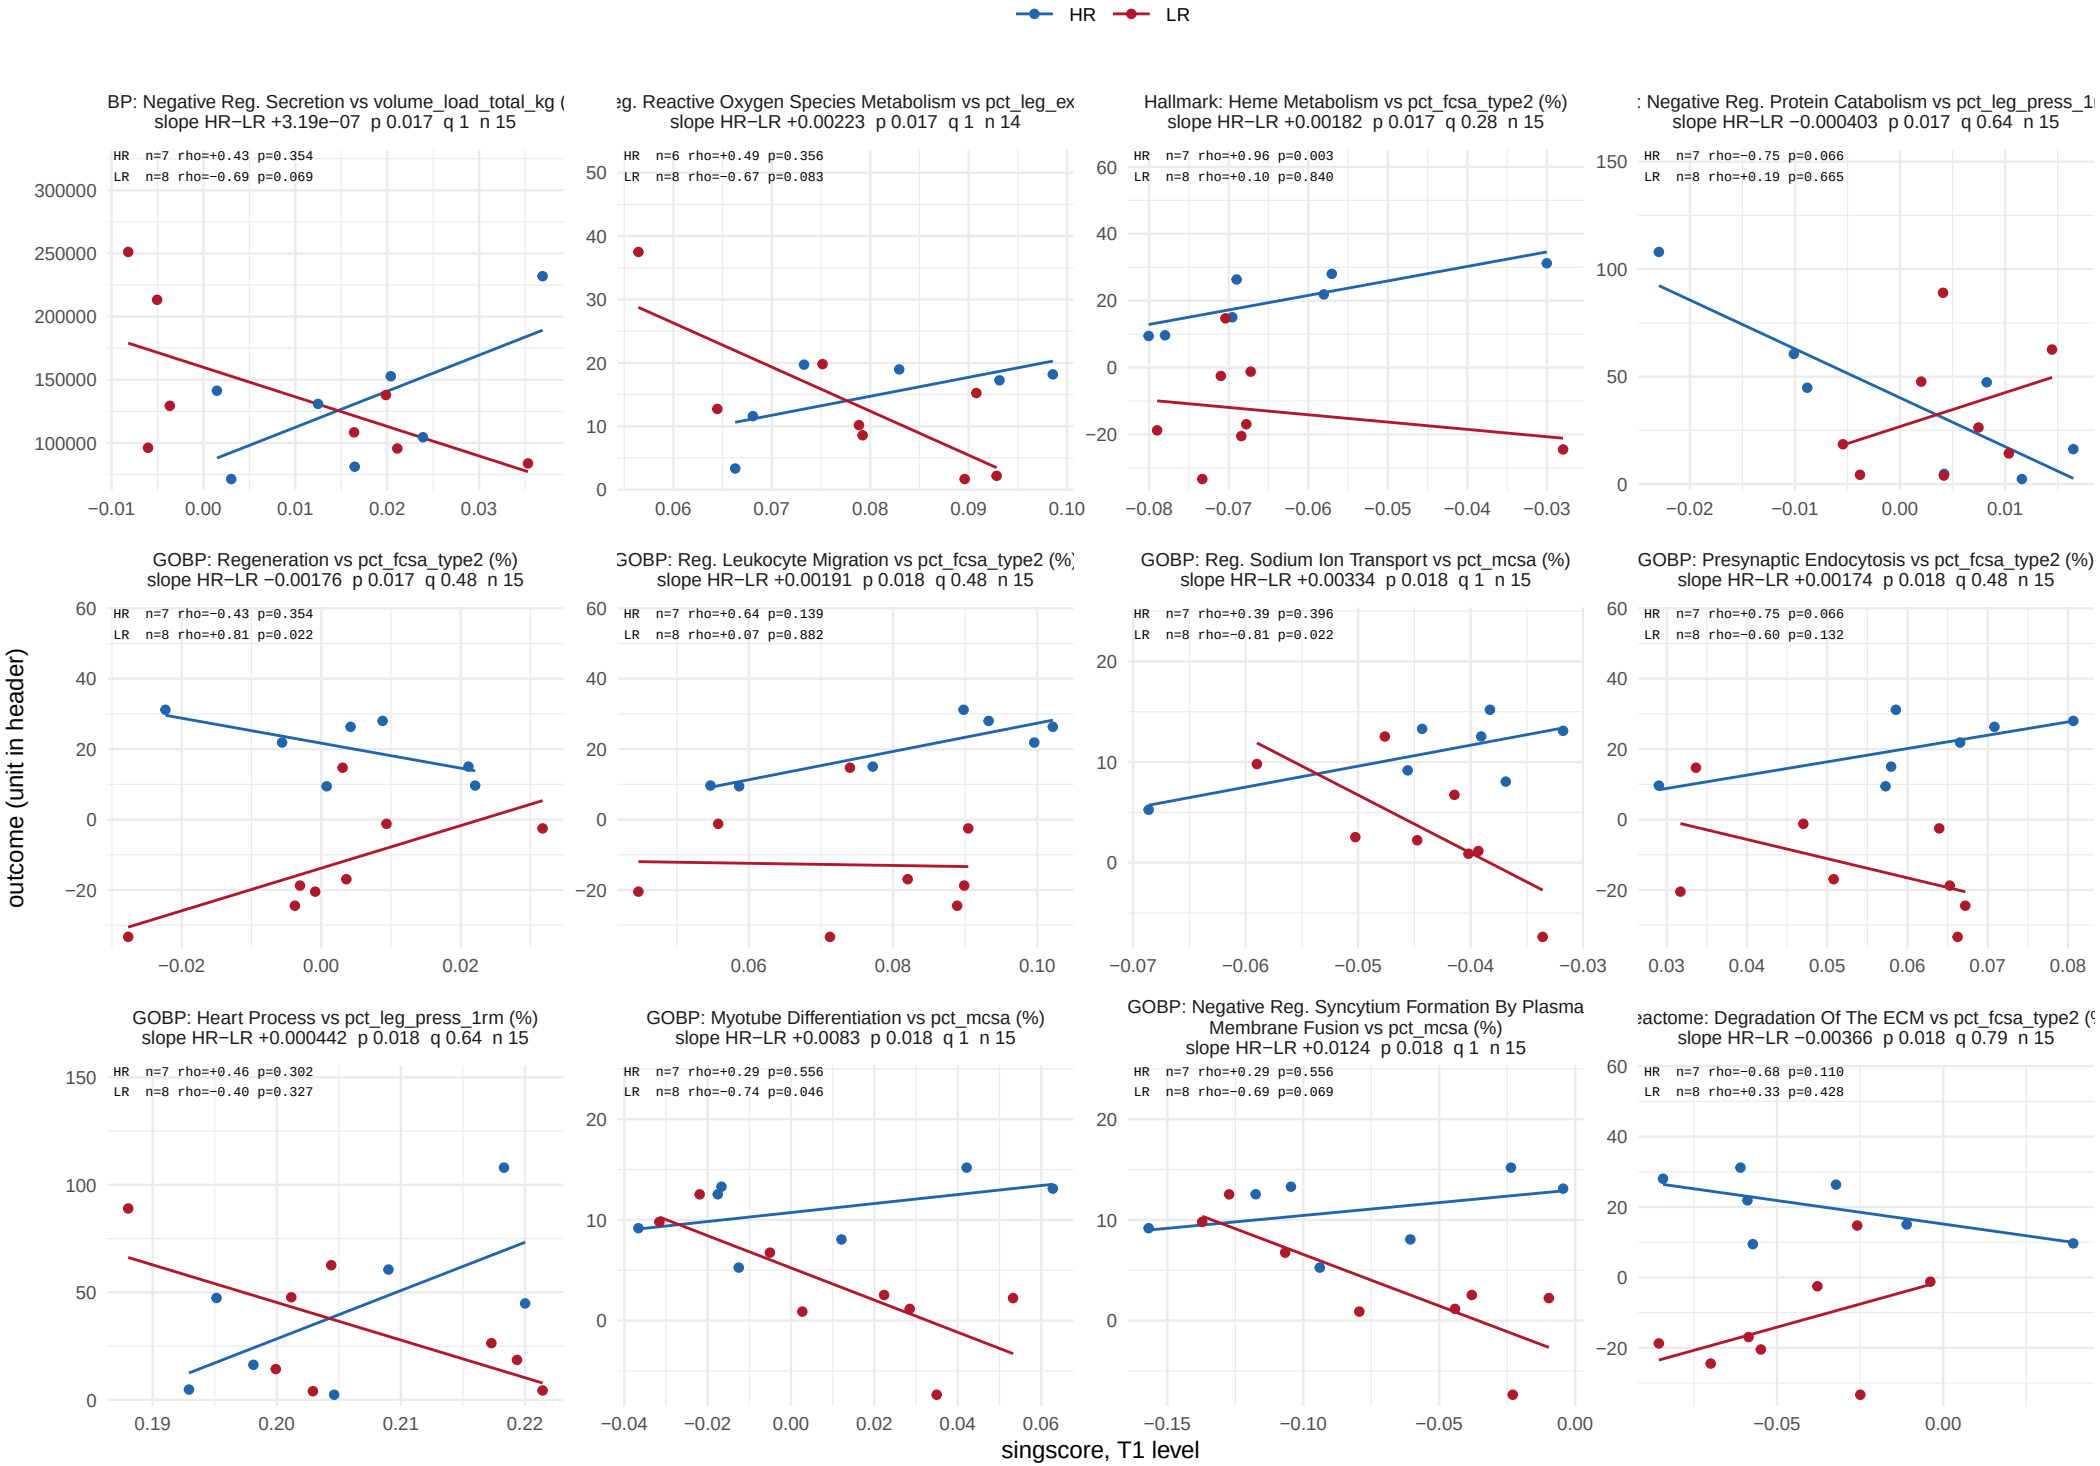


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, baseline window


382 of 11024 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 10 of 32.

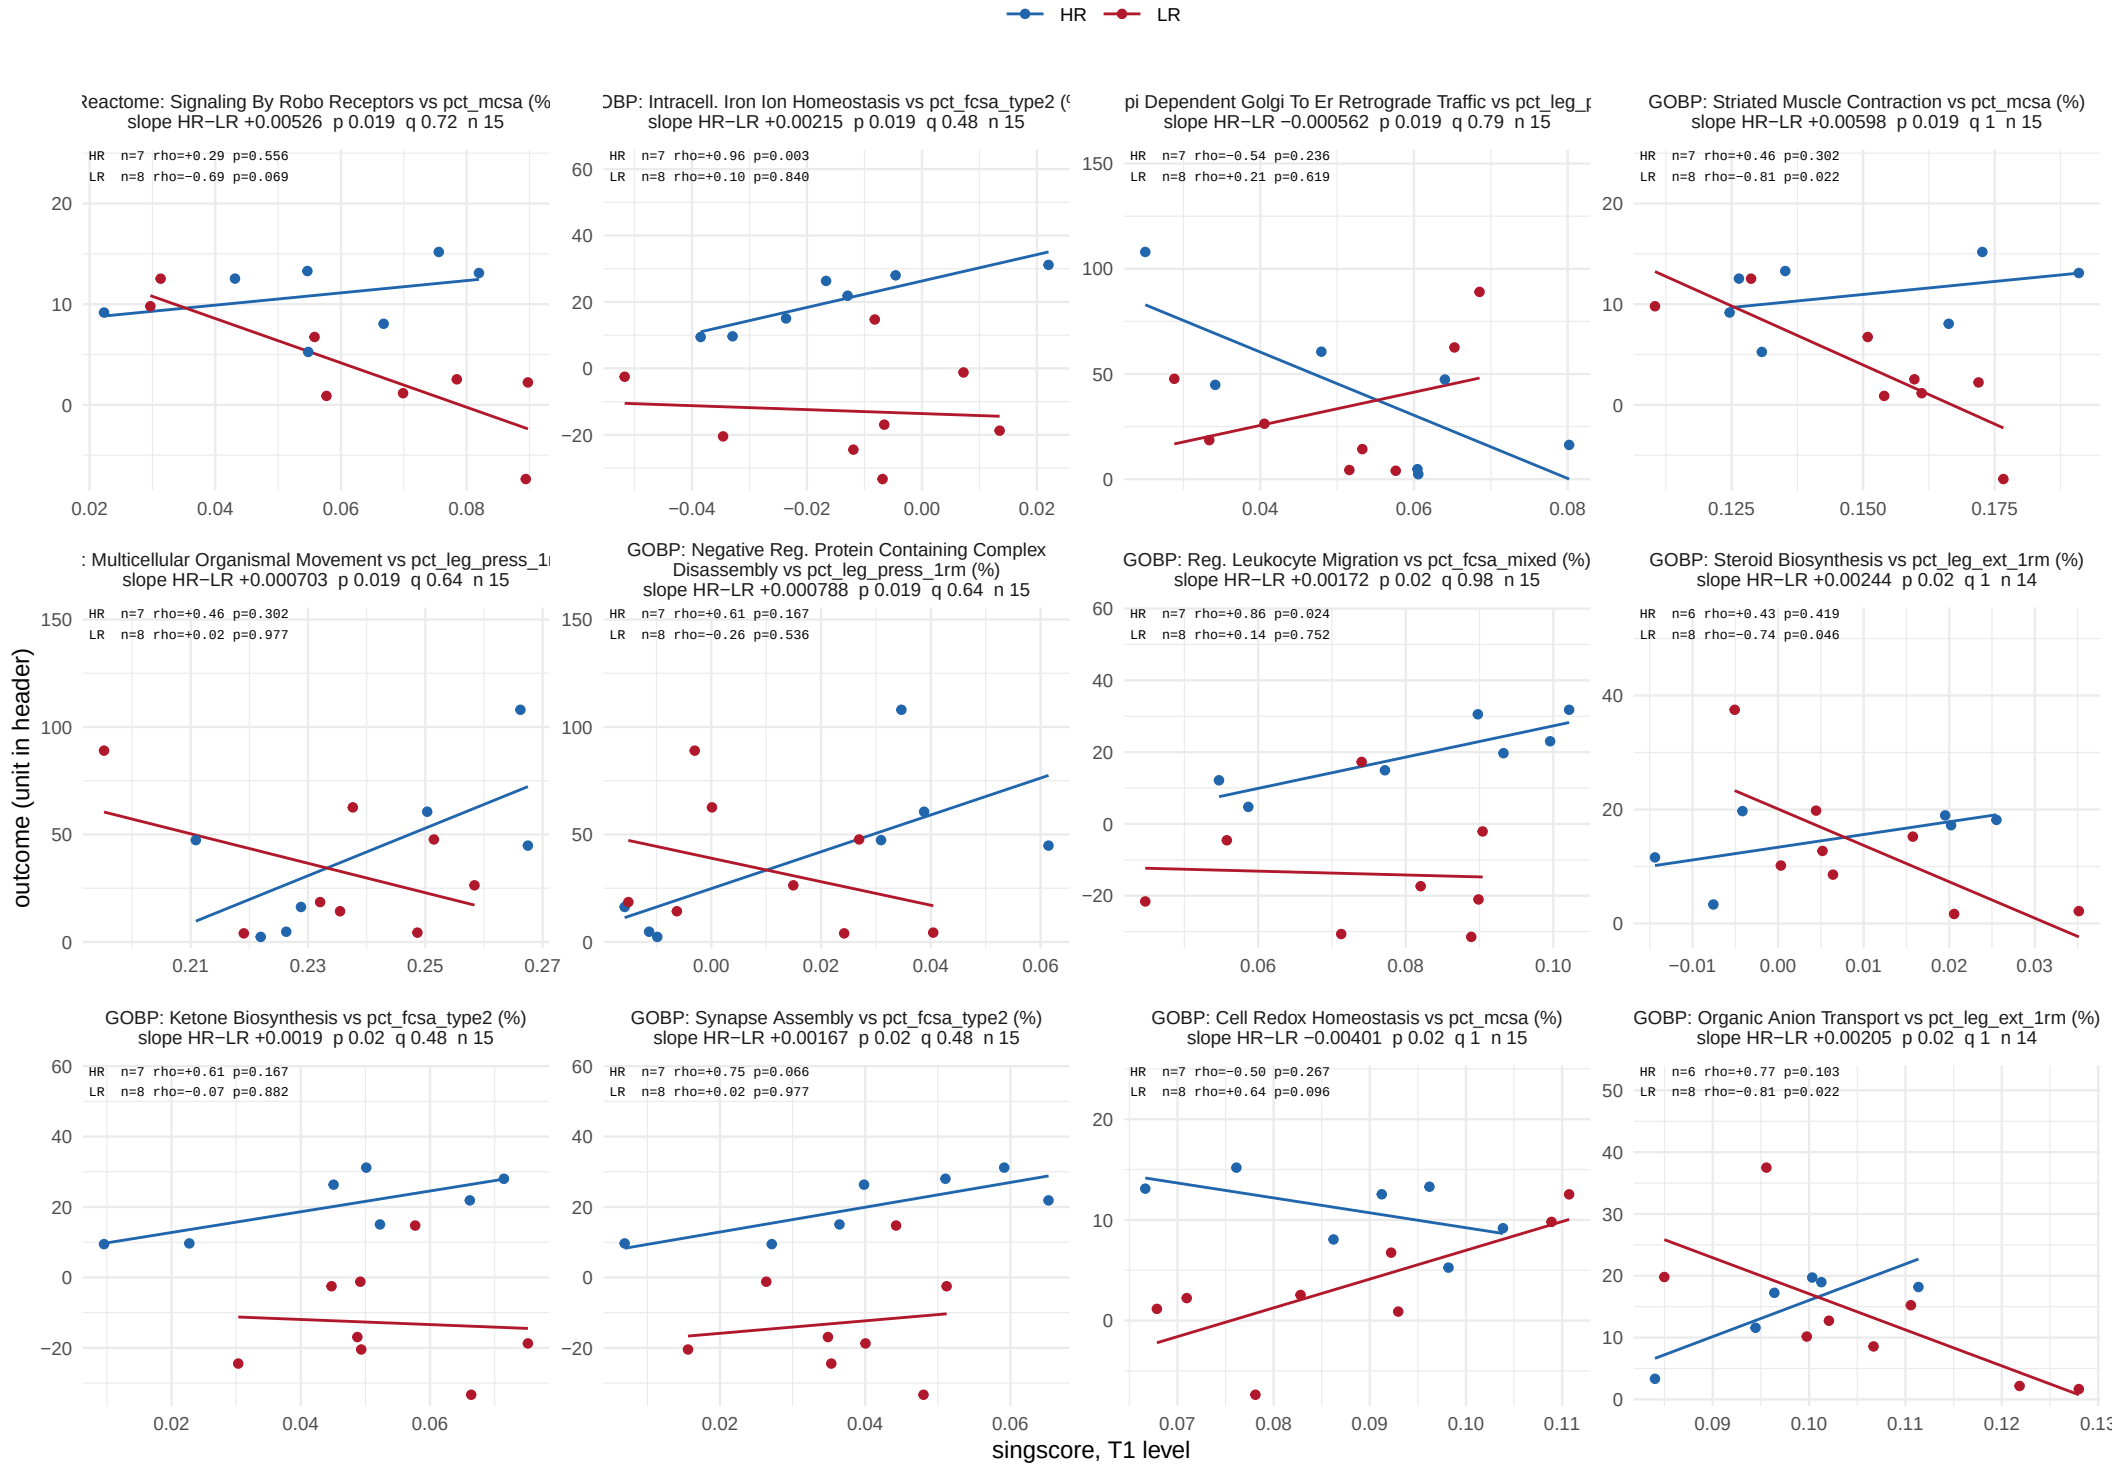


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, baseline window


382 of 11024 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 11 of 32.

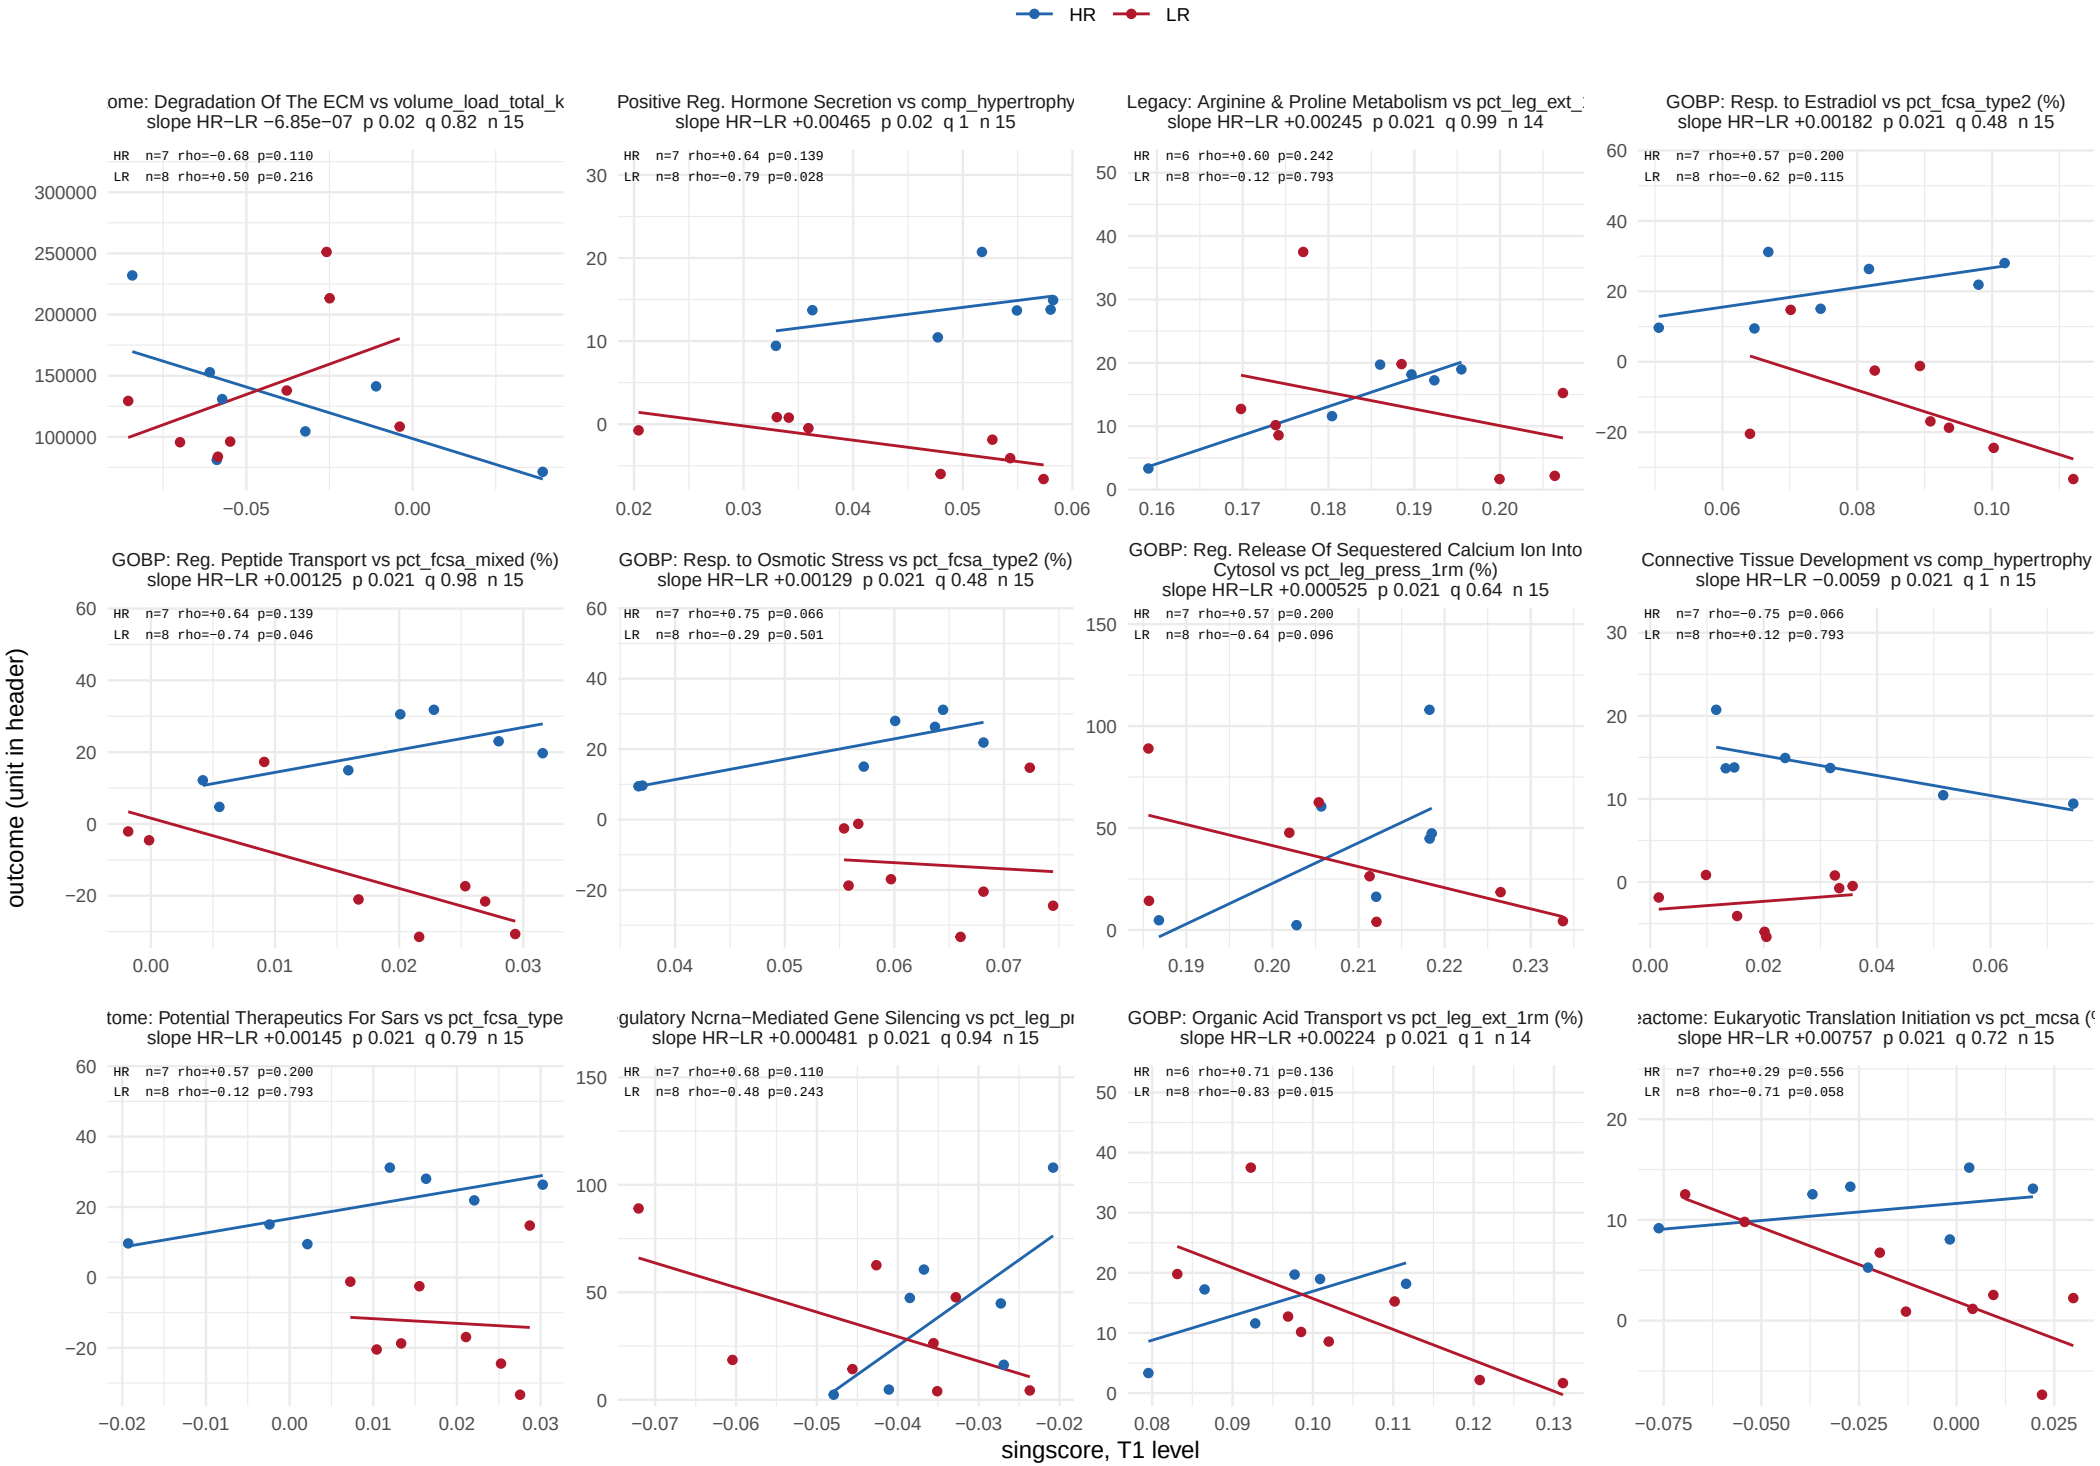


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, baseline window


382 of 11024 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 12 of 32.

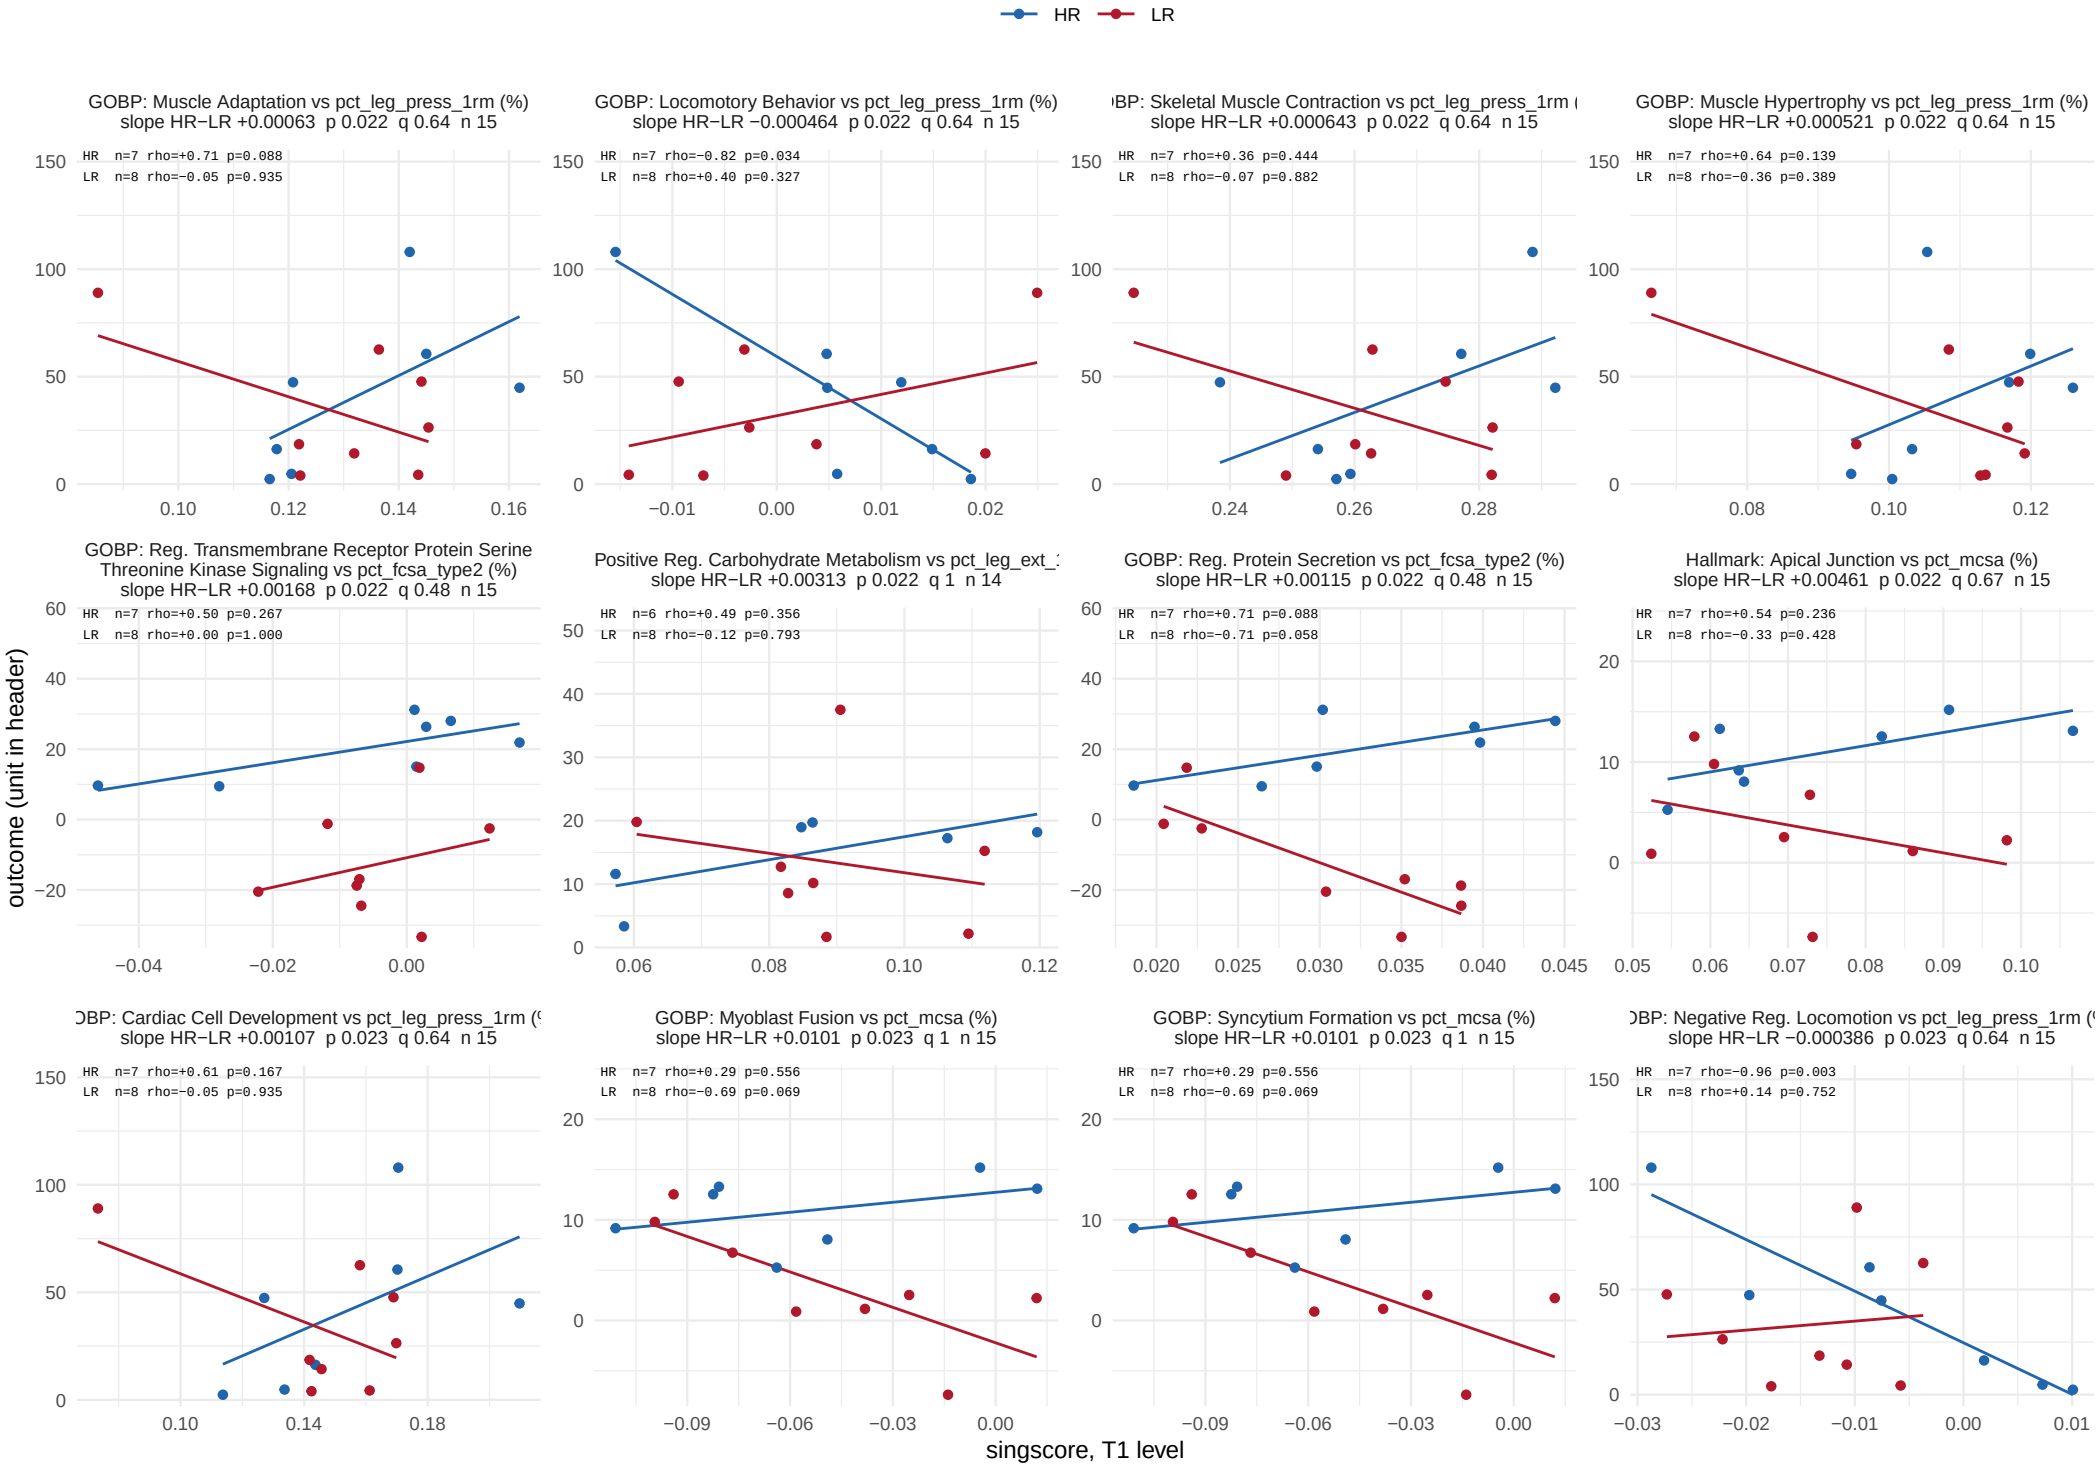


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, baseline window


382 of 11024 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 13 of 32.

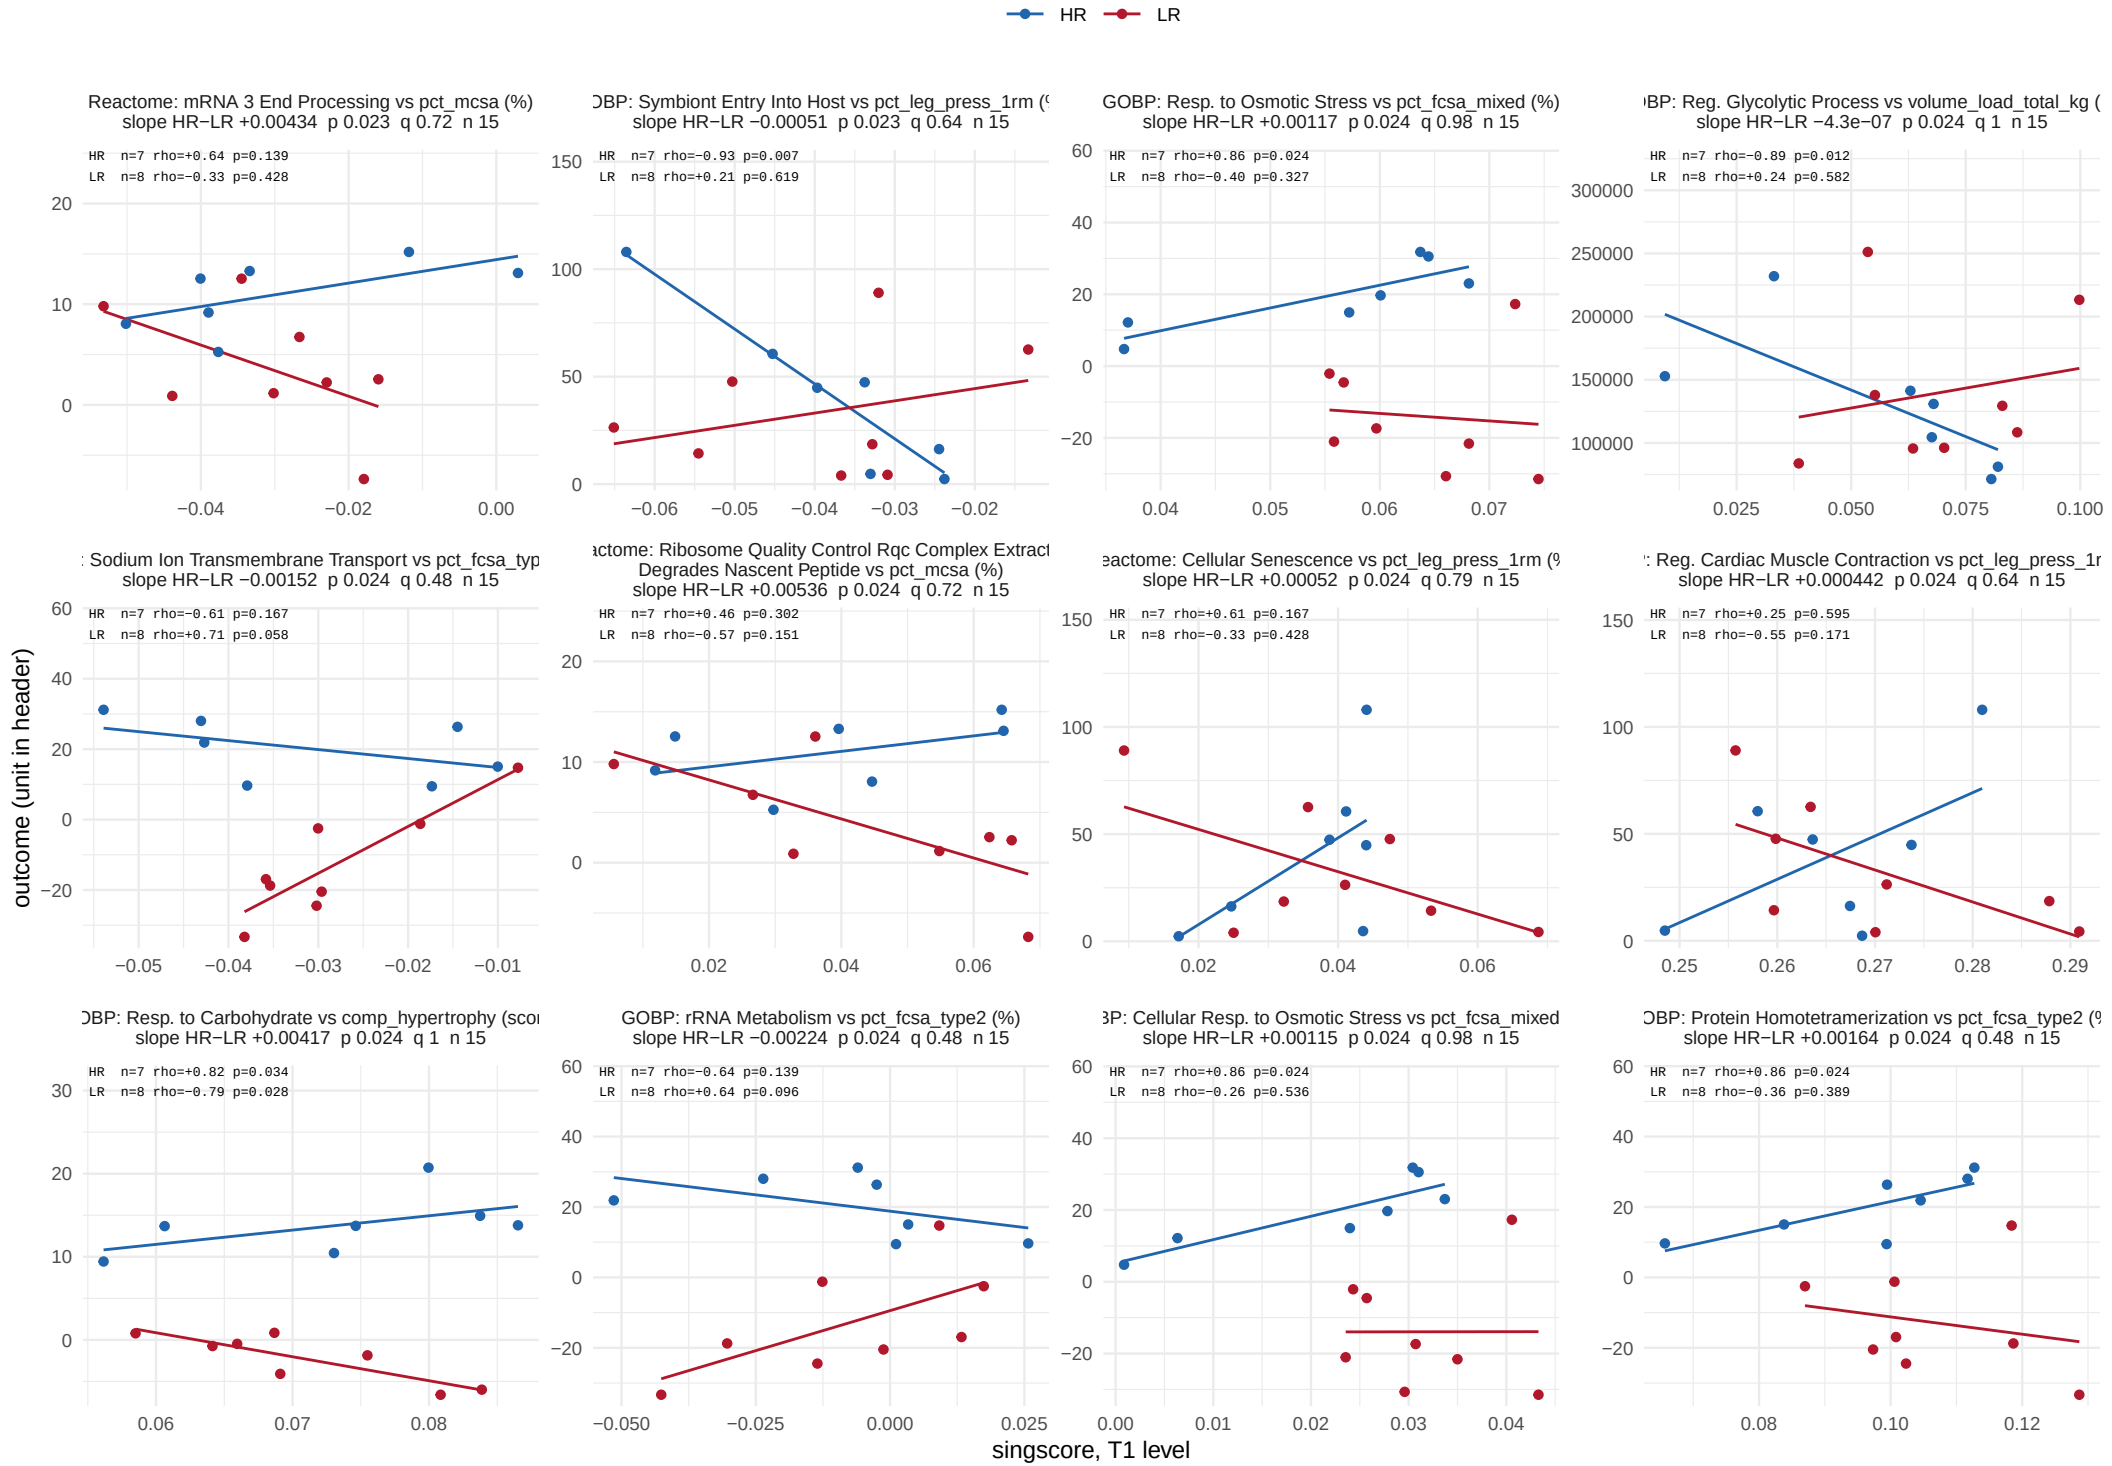


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, baseline window


382 of 11024 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 14 of 32.

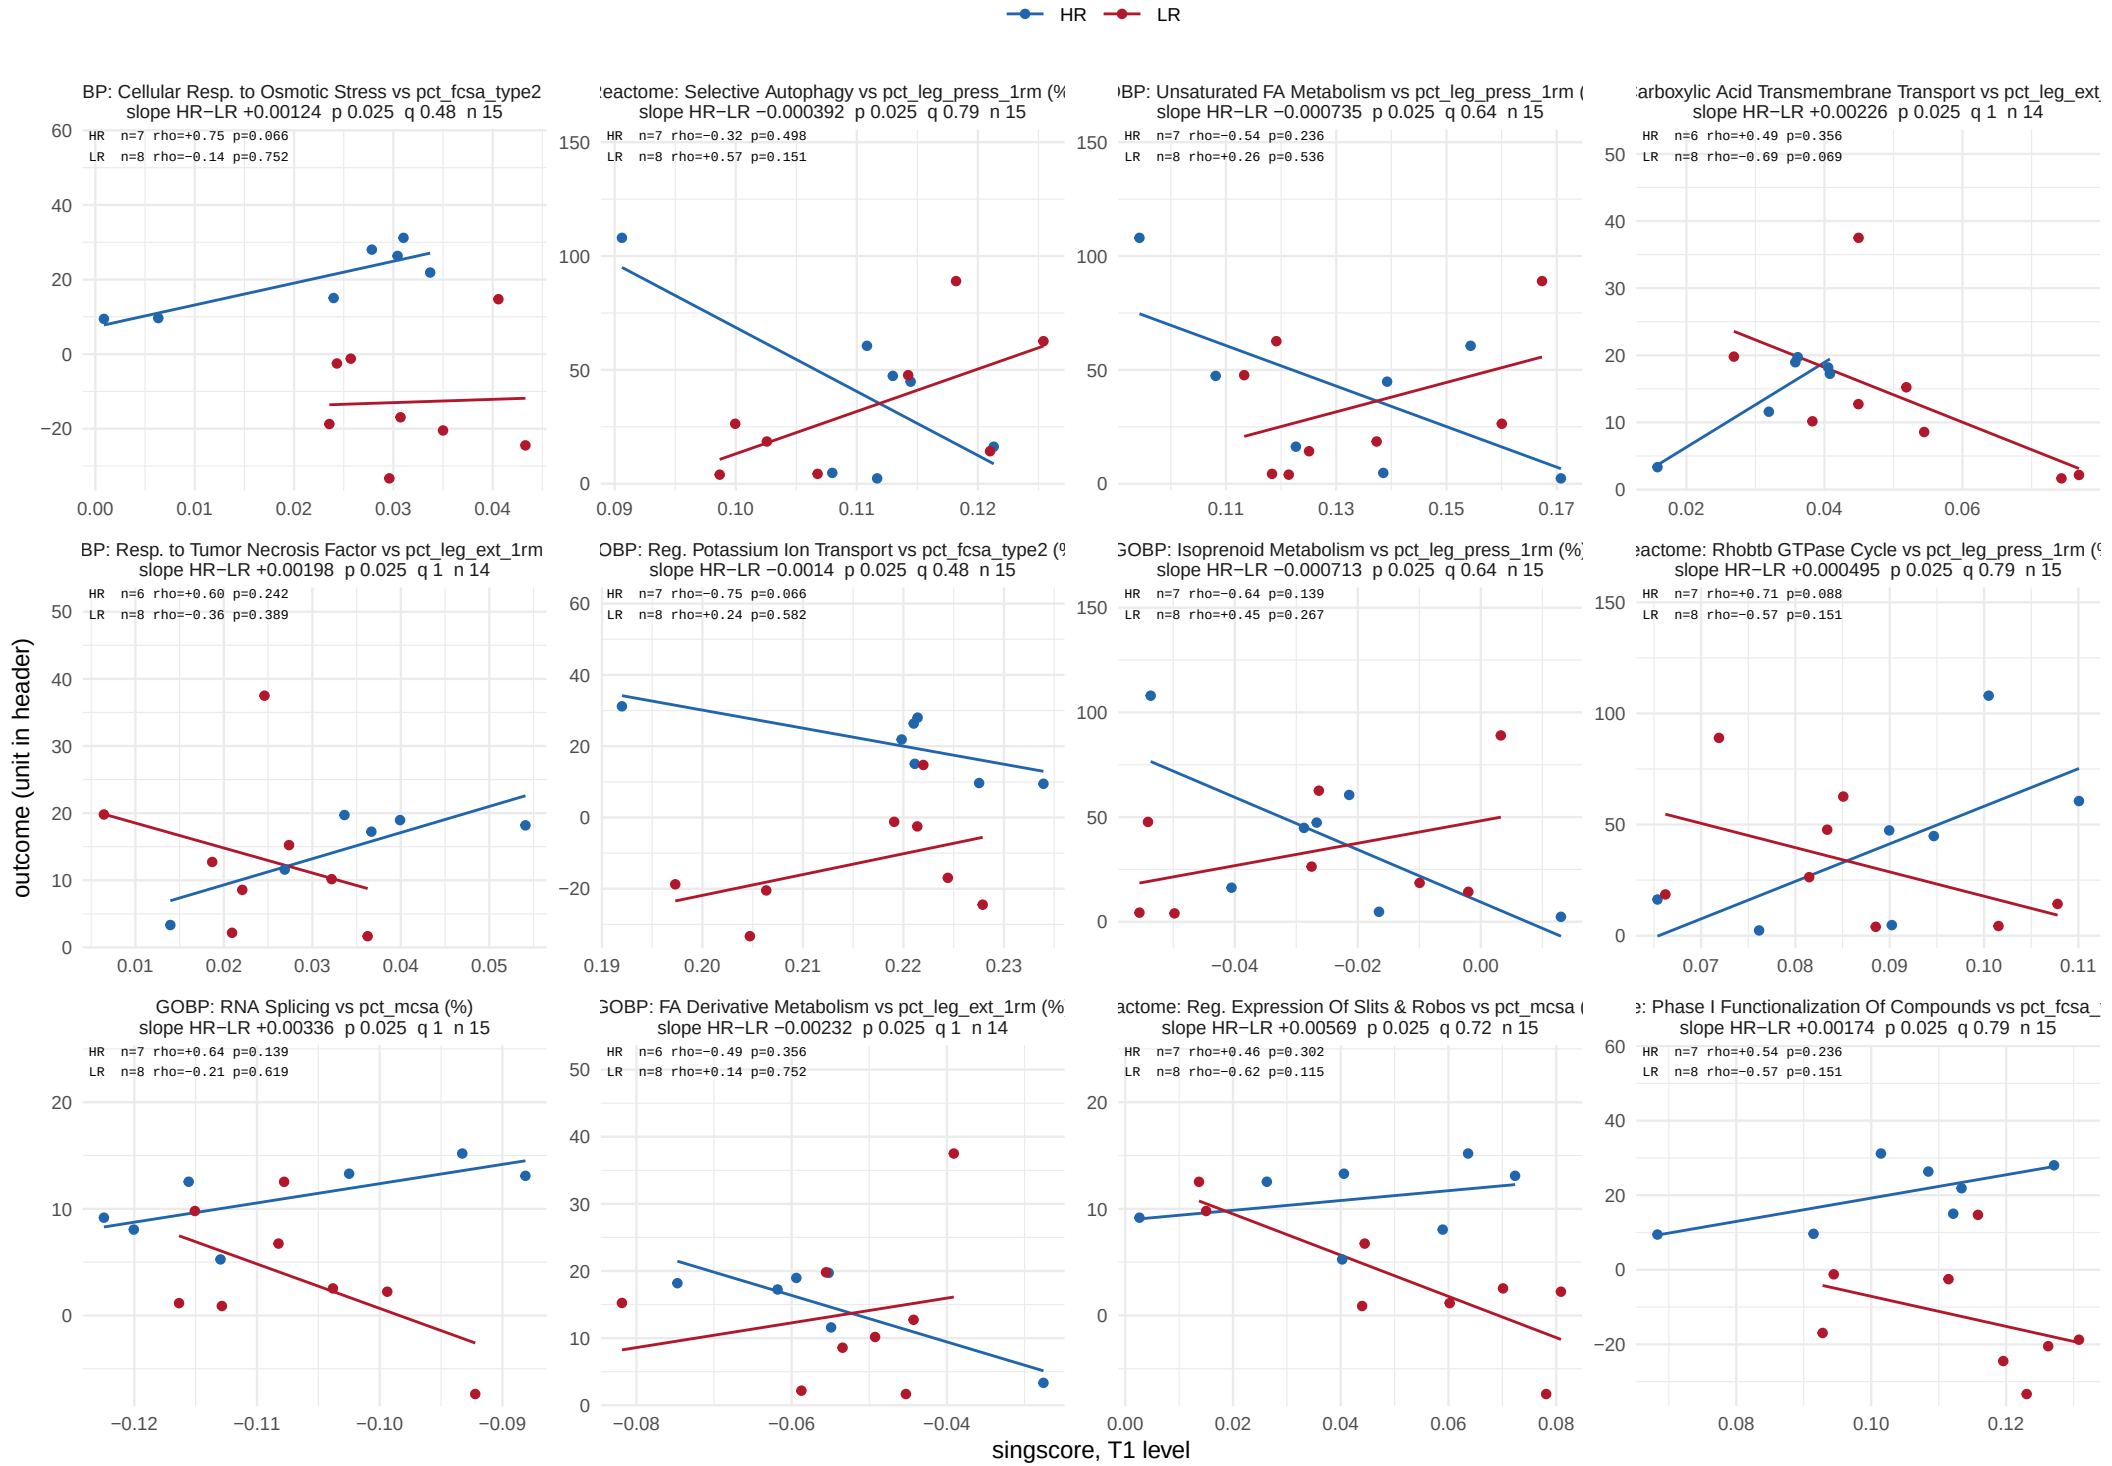


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, baseline window


382 of 11024 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 15 of 32.

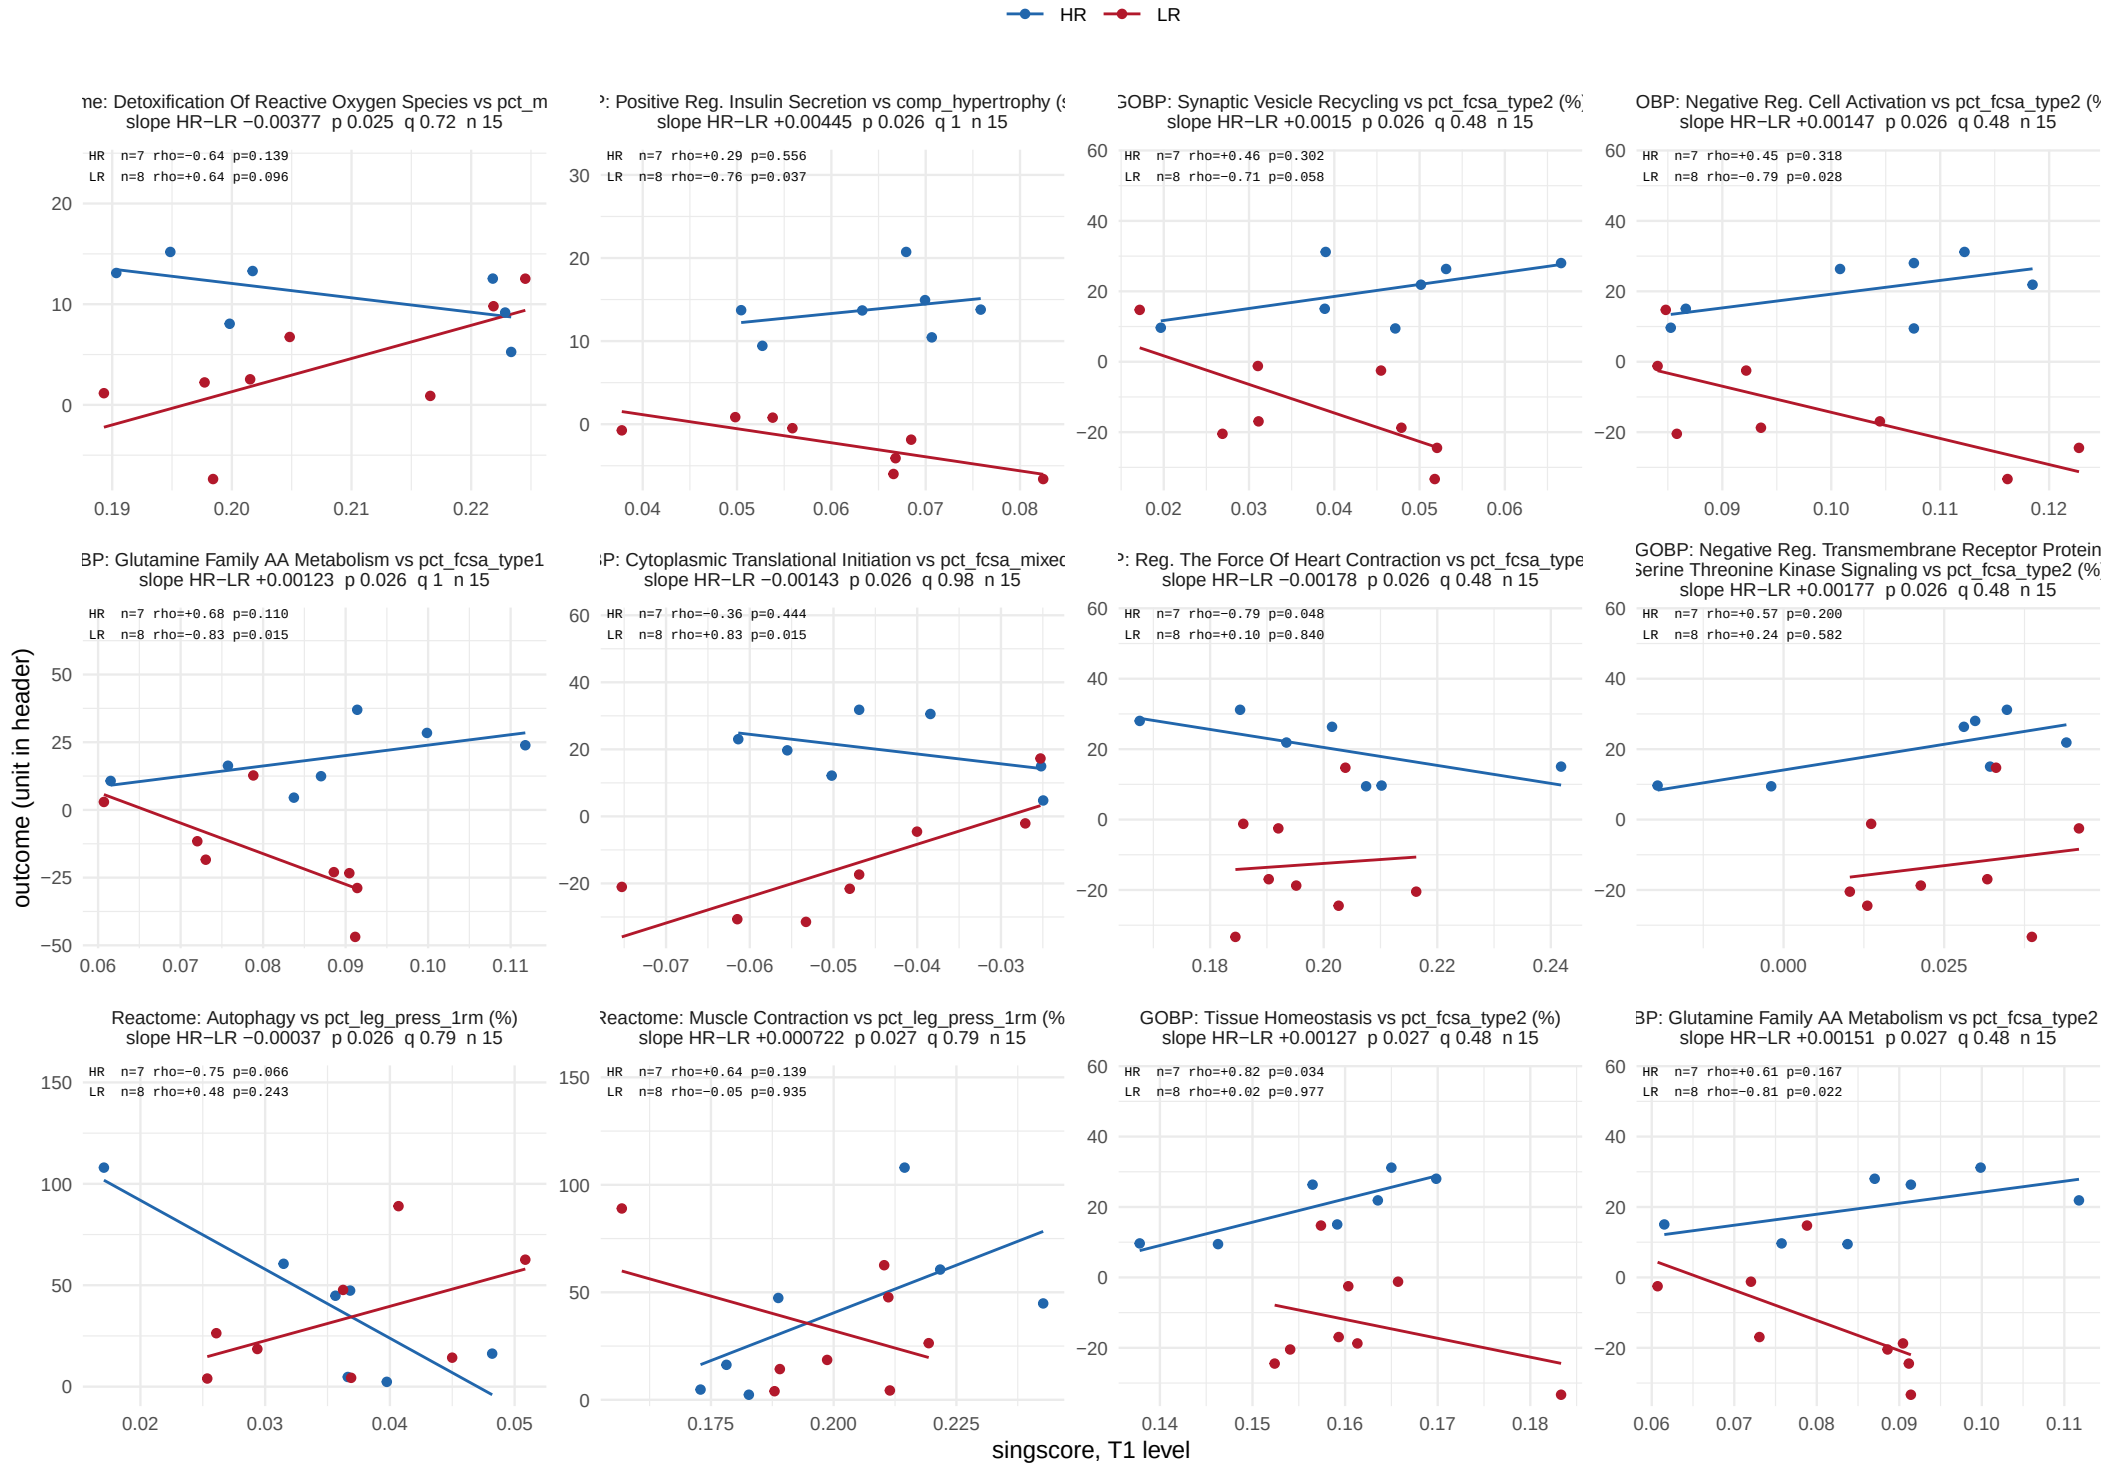


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, baseline window


382 of 11024 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 16 of 32.

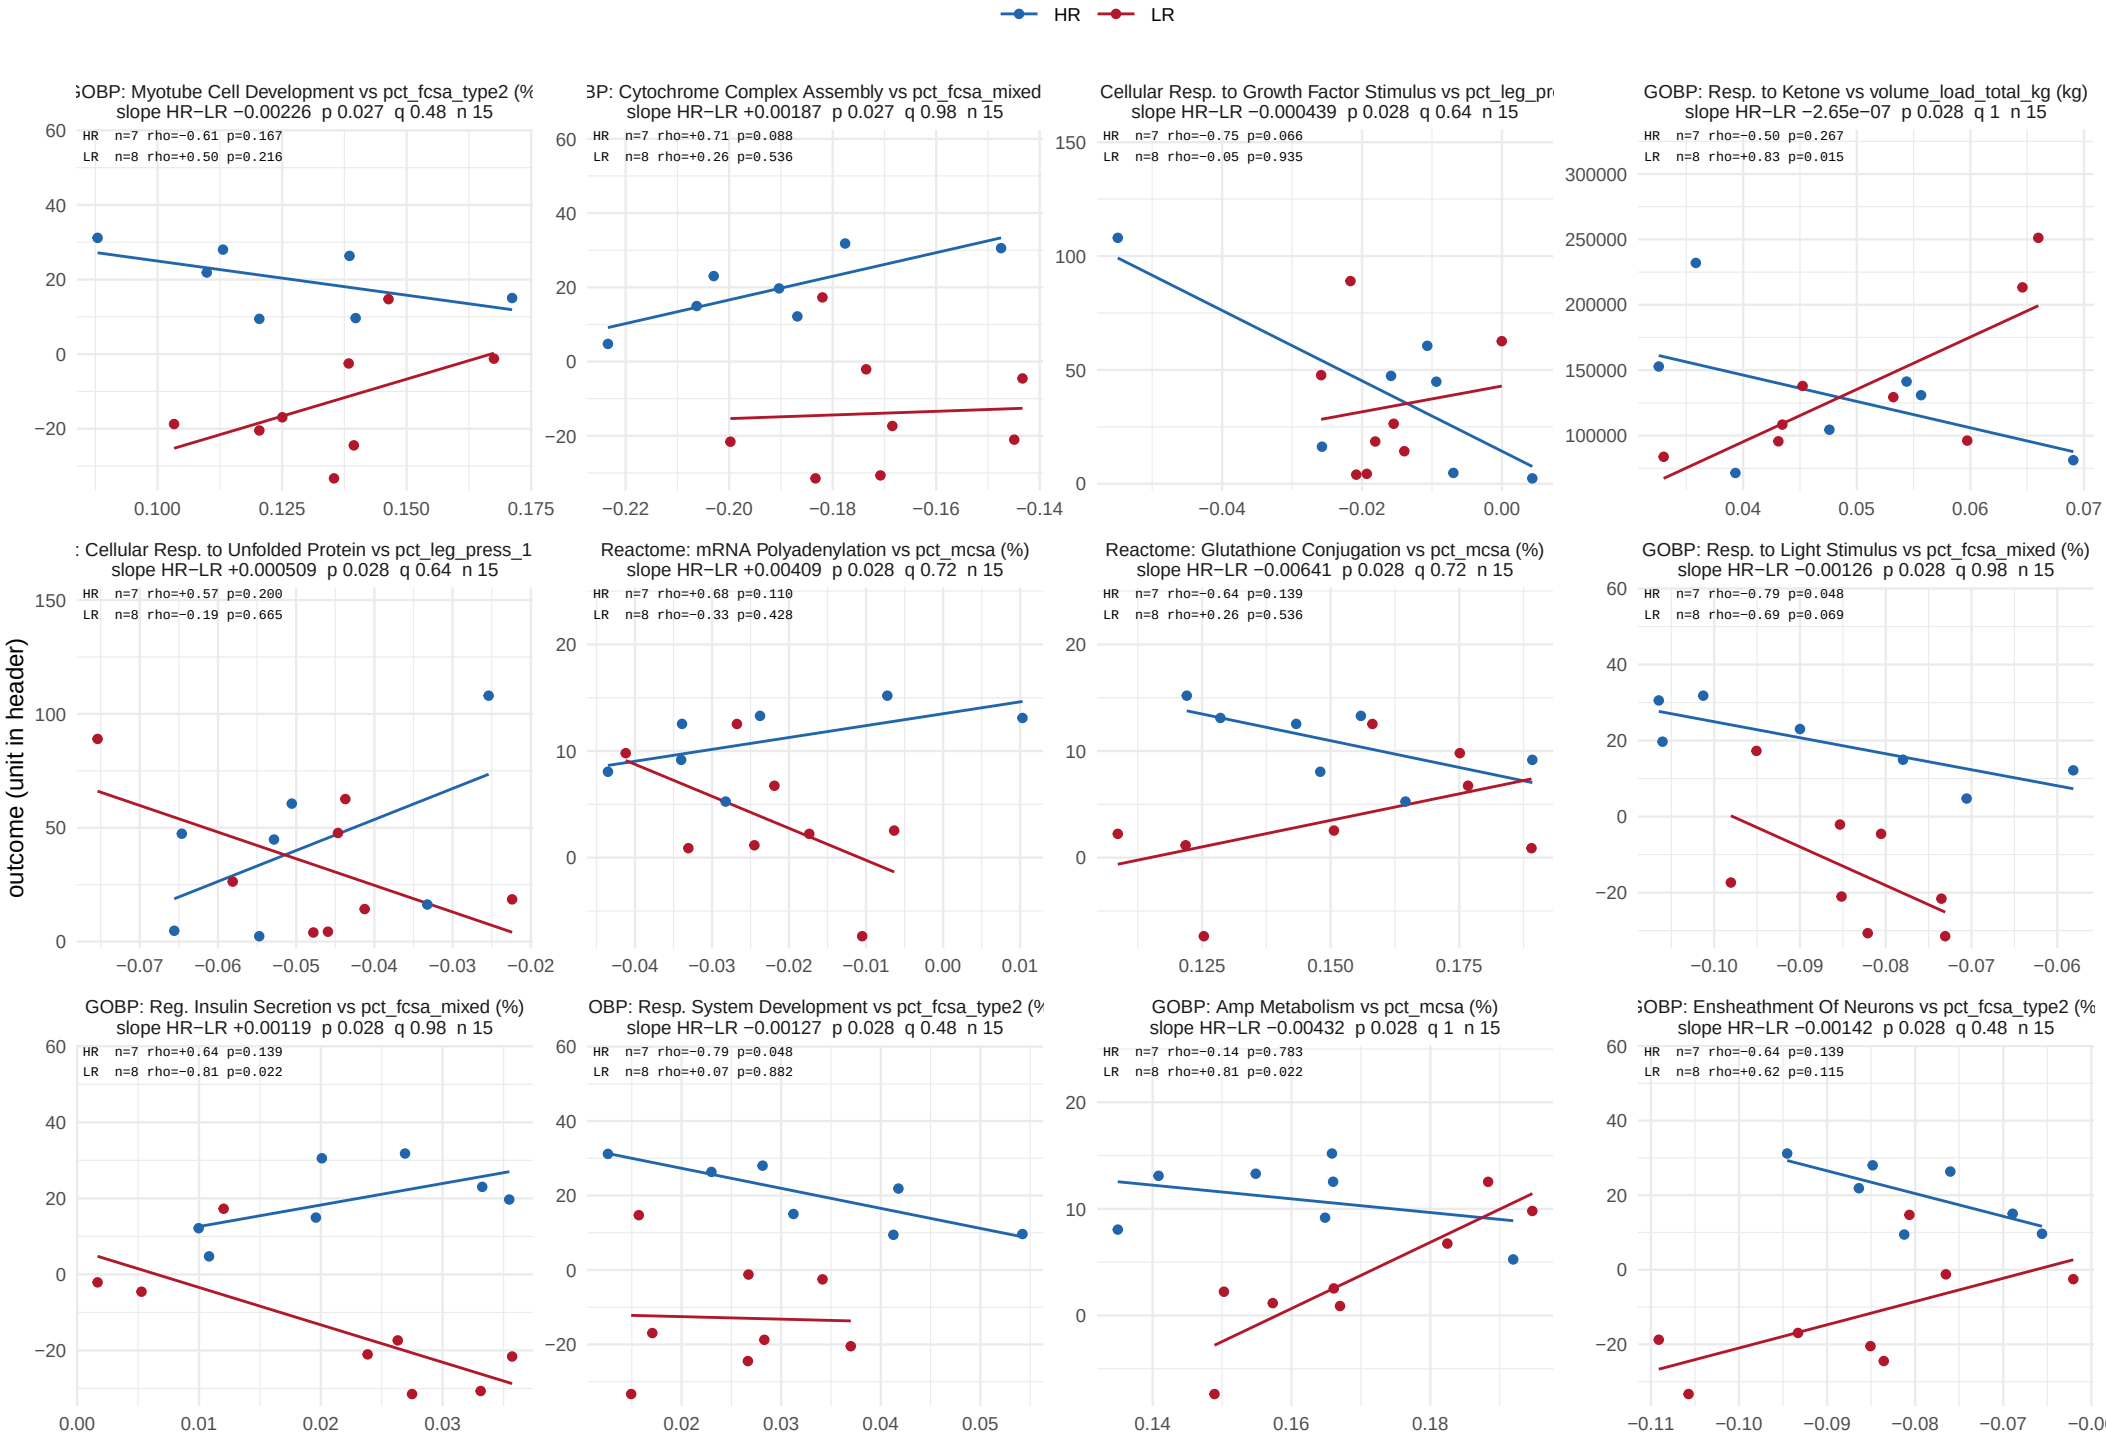


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, baseline window


382 of 11024 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 17 of 32.

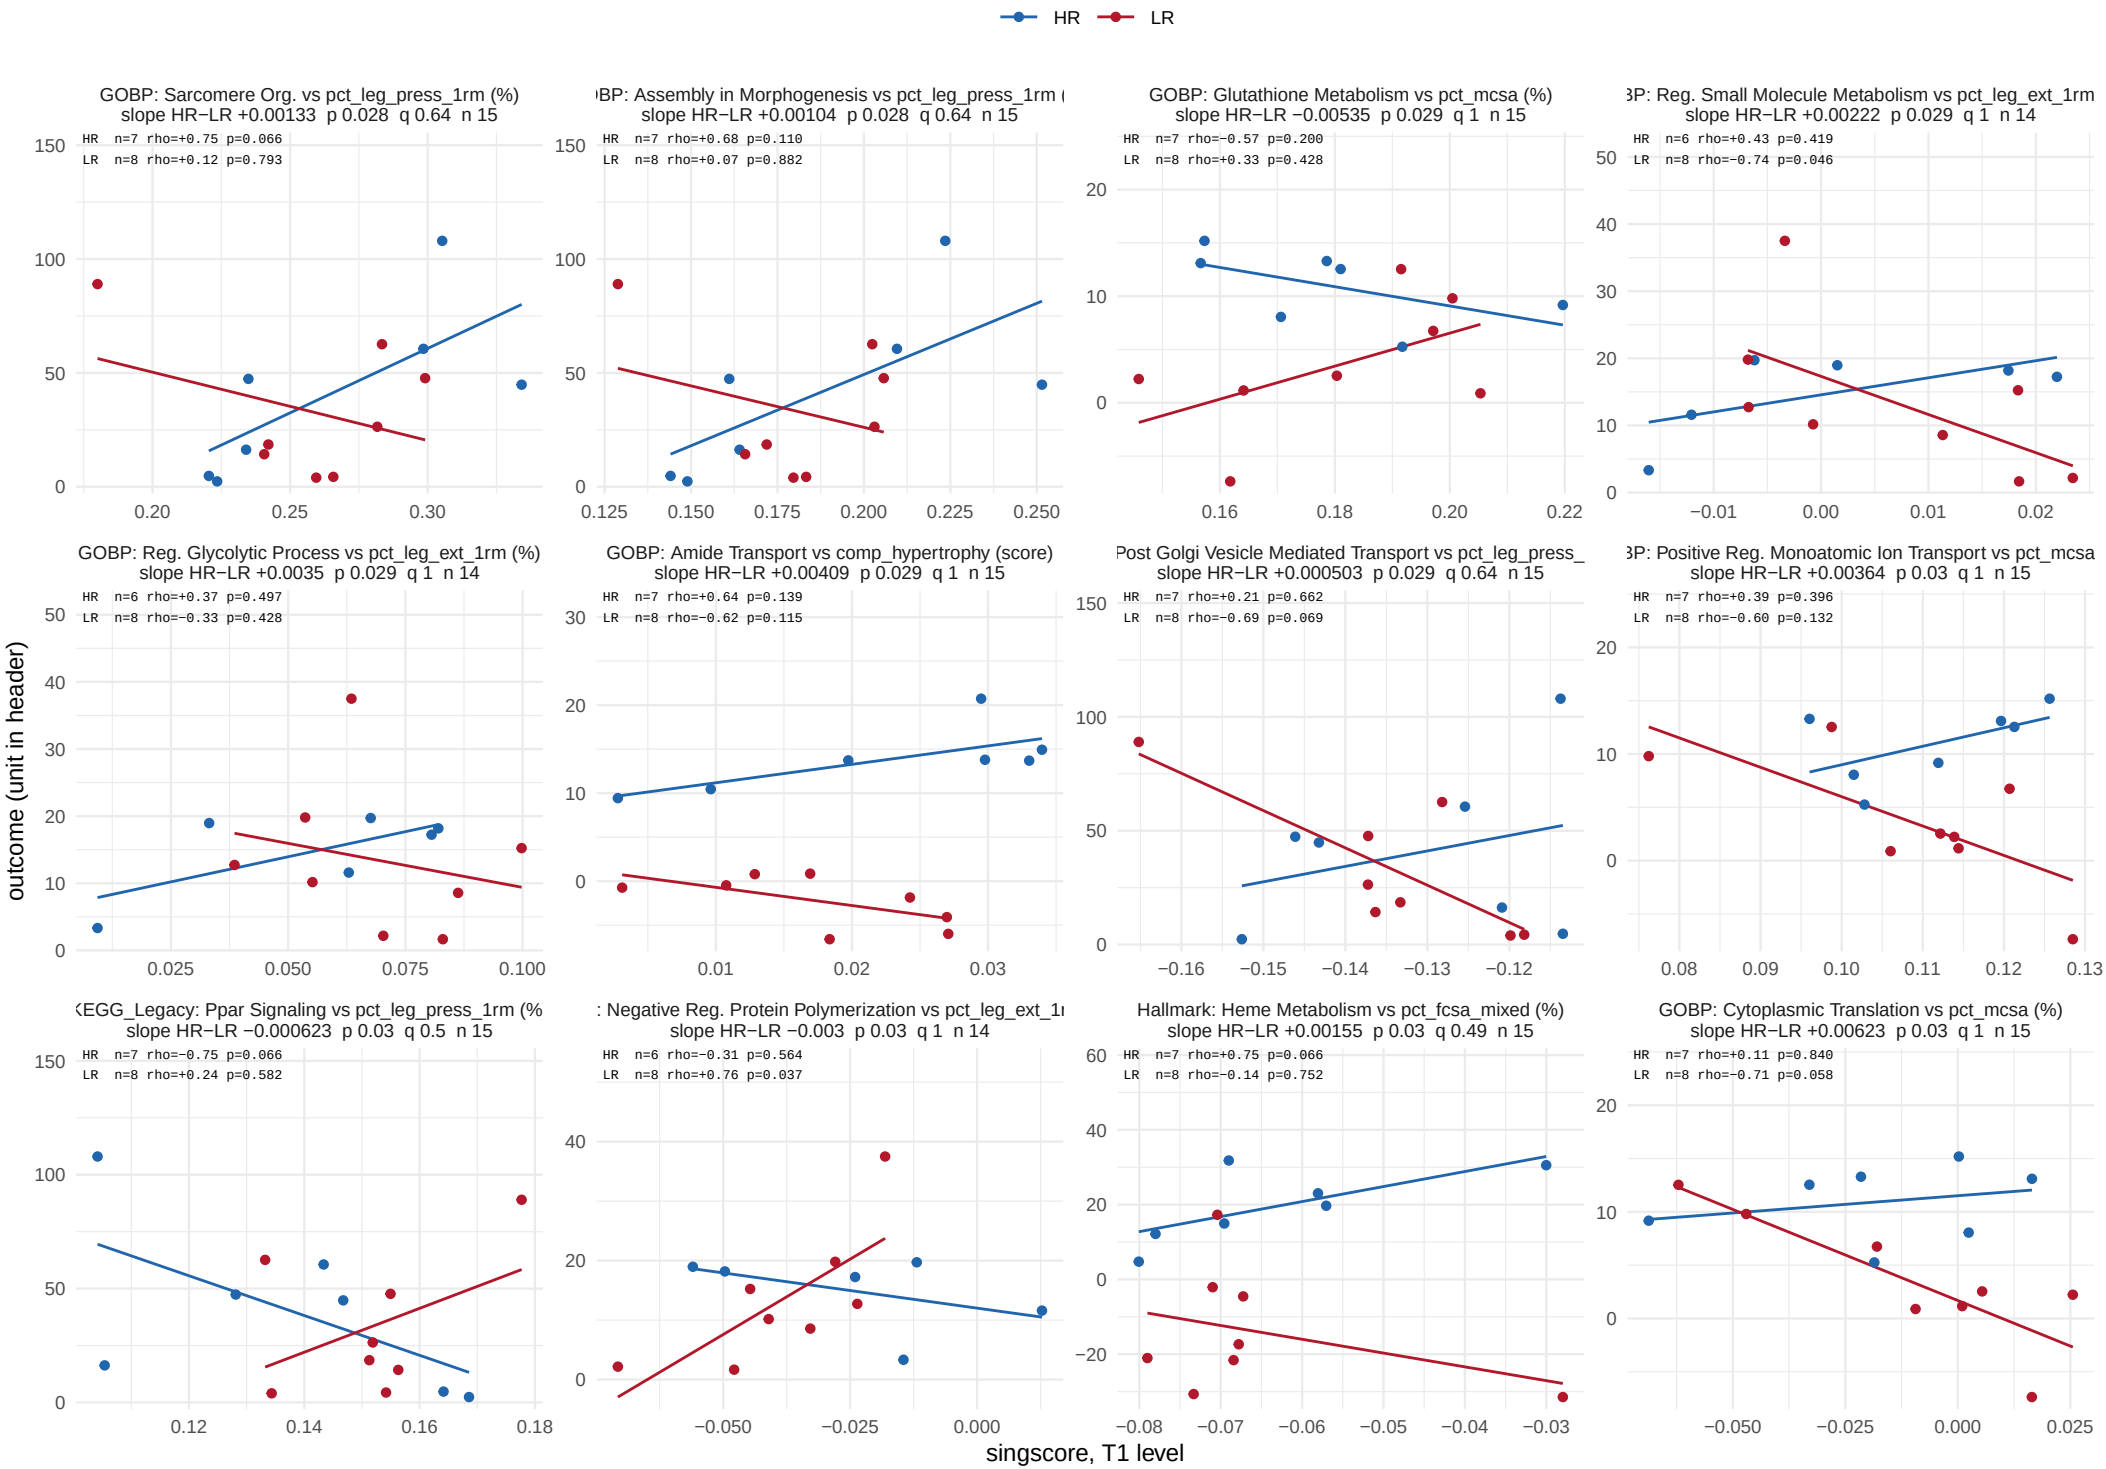


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, baseline window


382 of 11024 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 18 of 32.

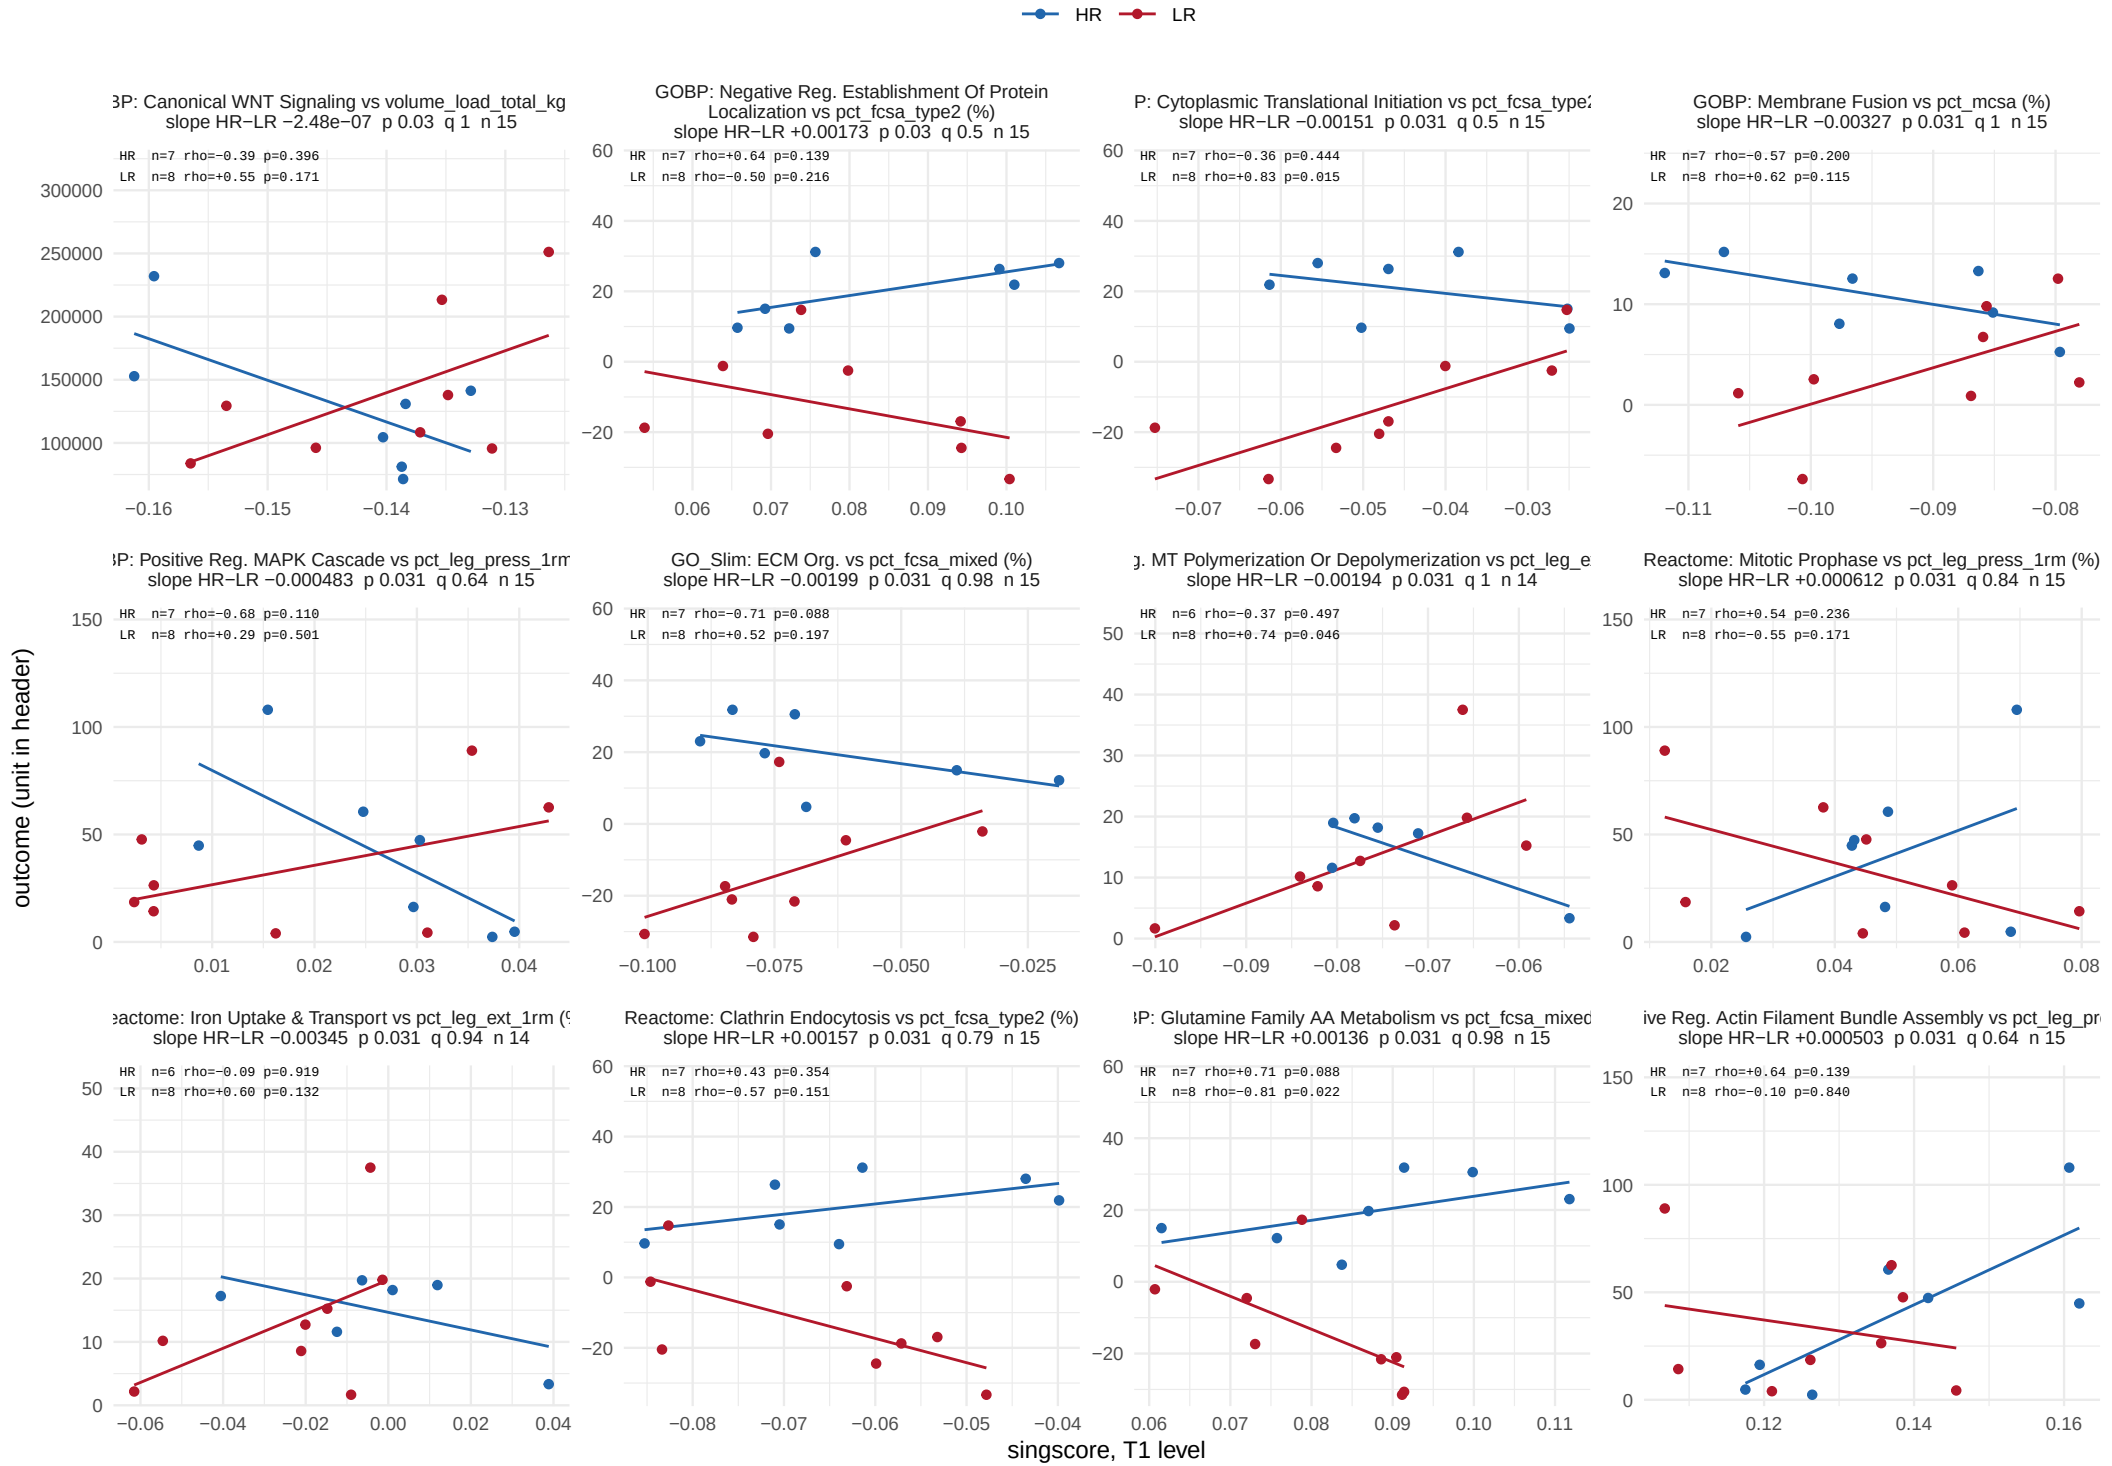


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, baseline window


382 of 11024 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 19 of 32.

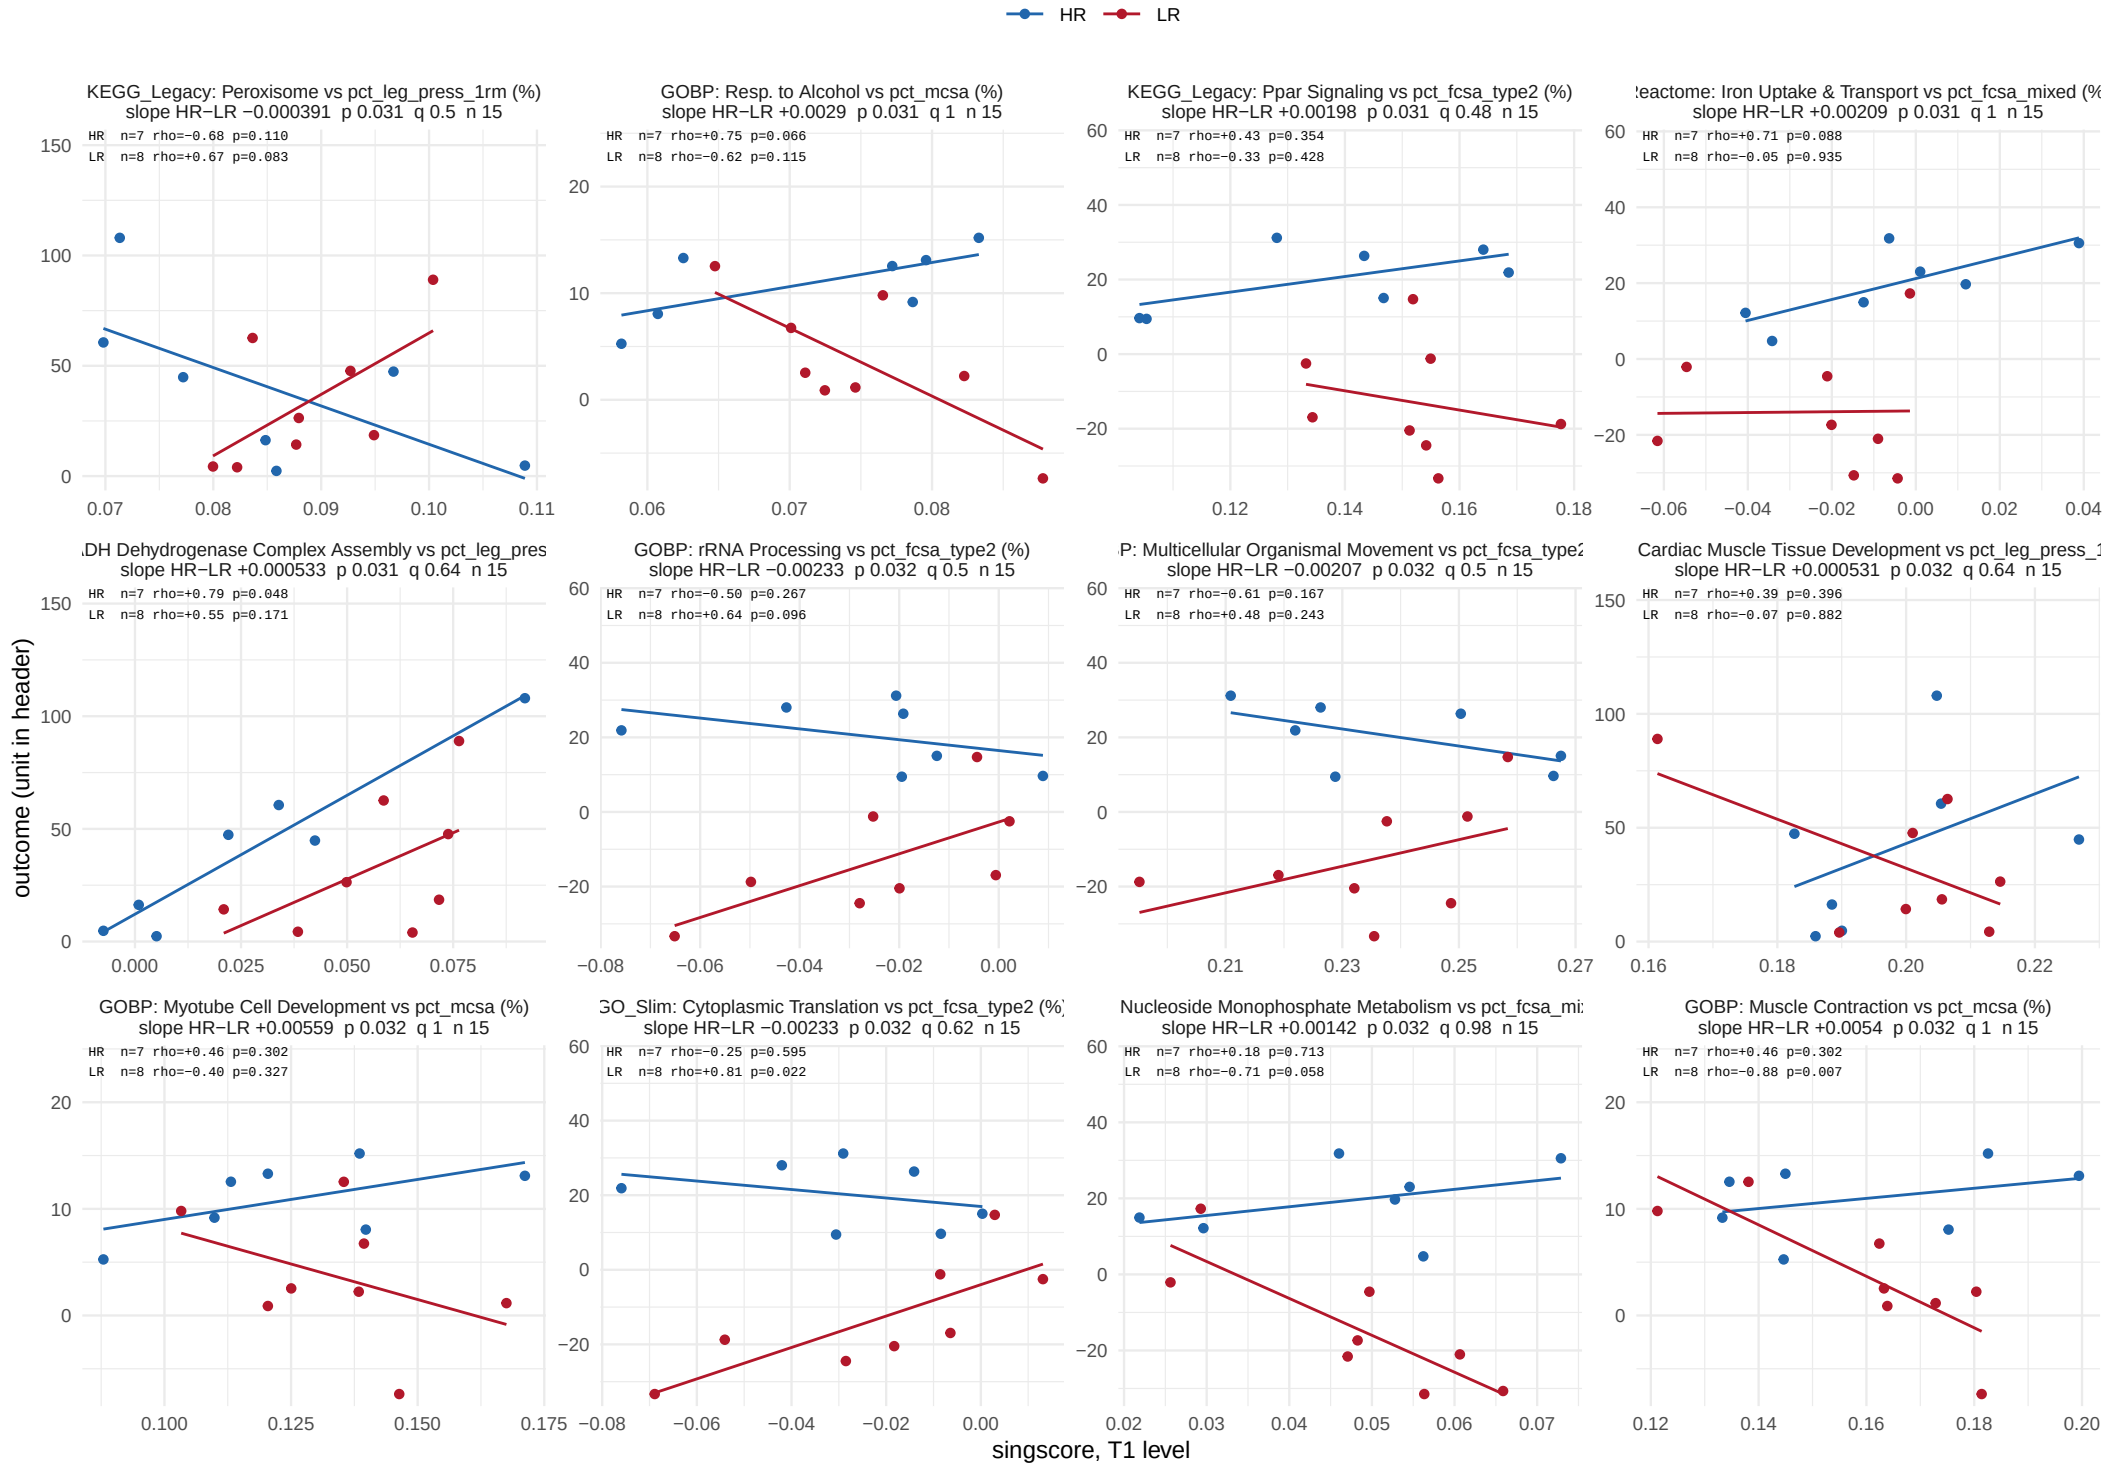


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, baseline window


382 of 11024 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 20 of 32.

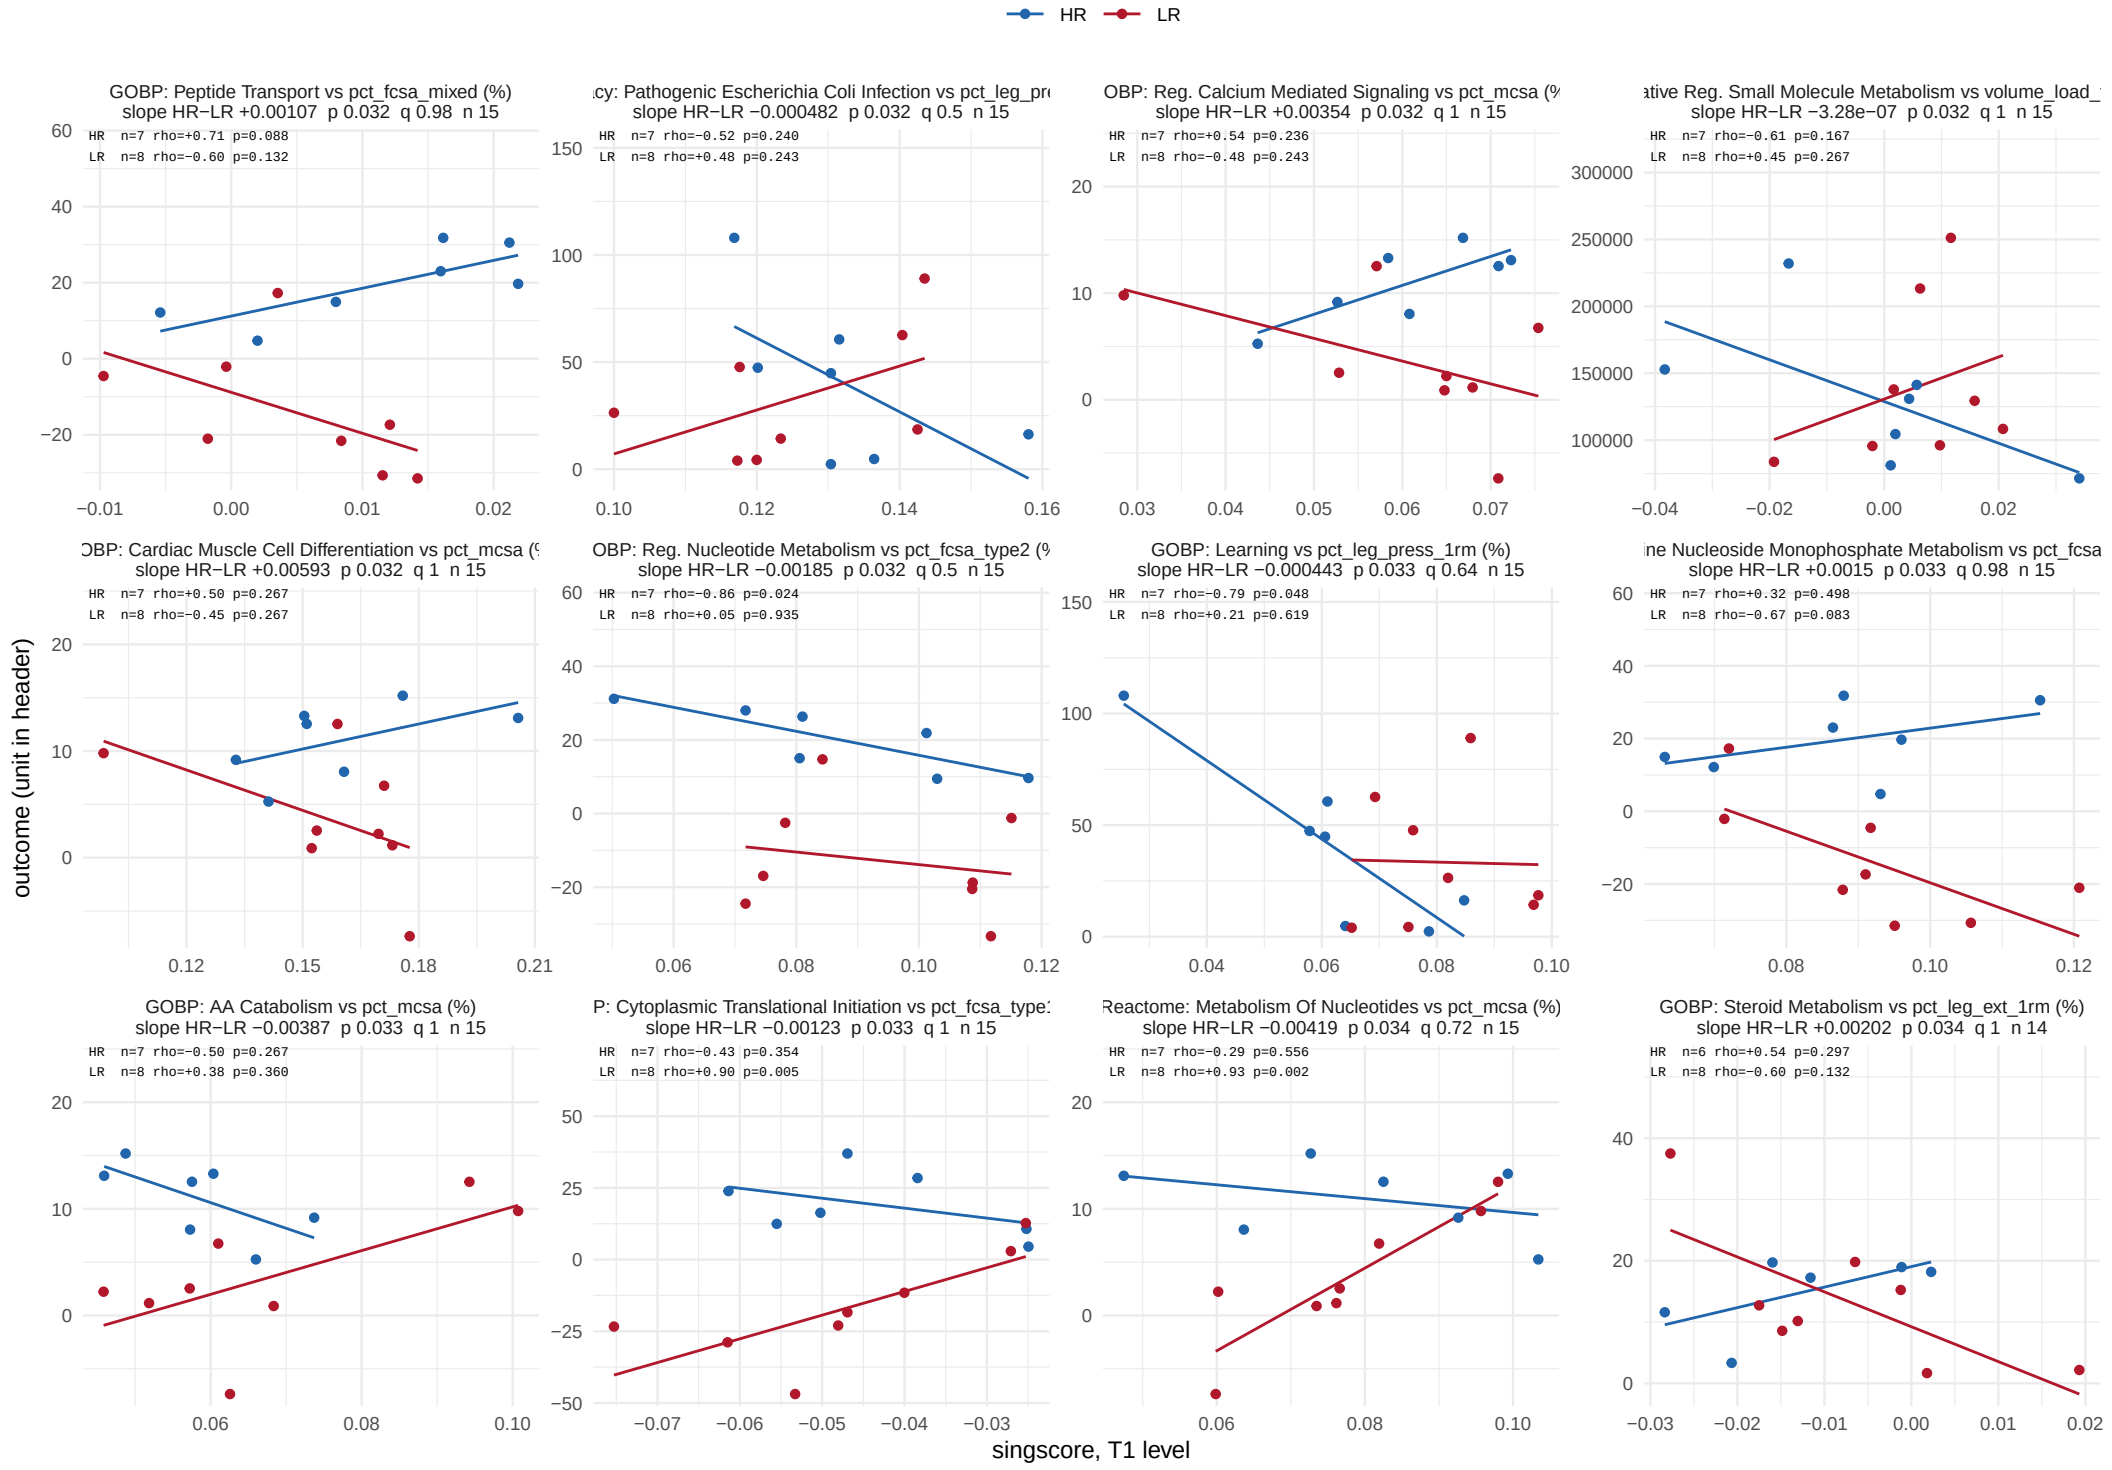


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, baseline window


382 of 11024 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 21 of 32.

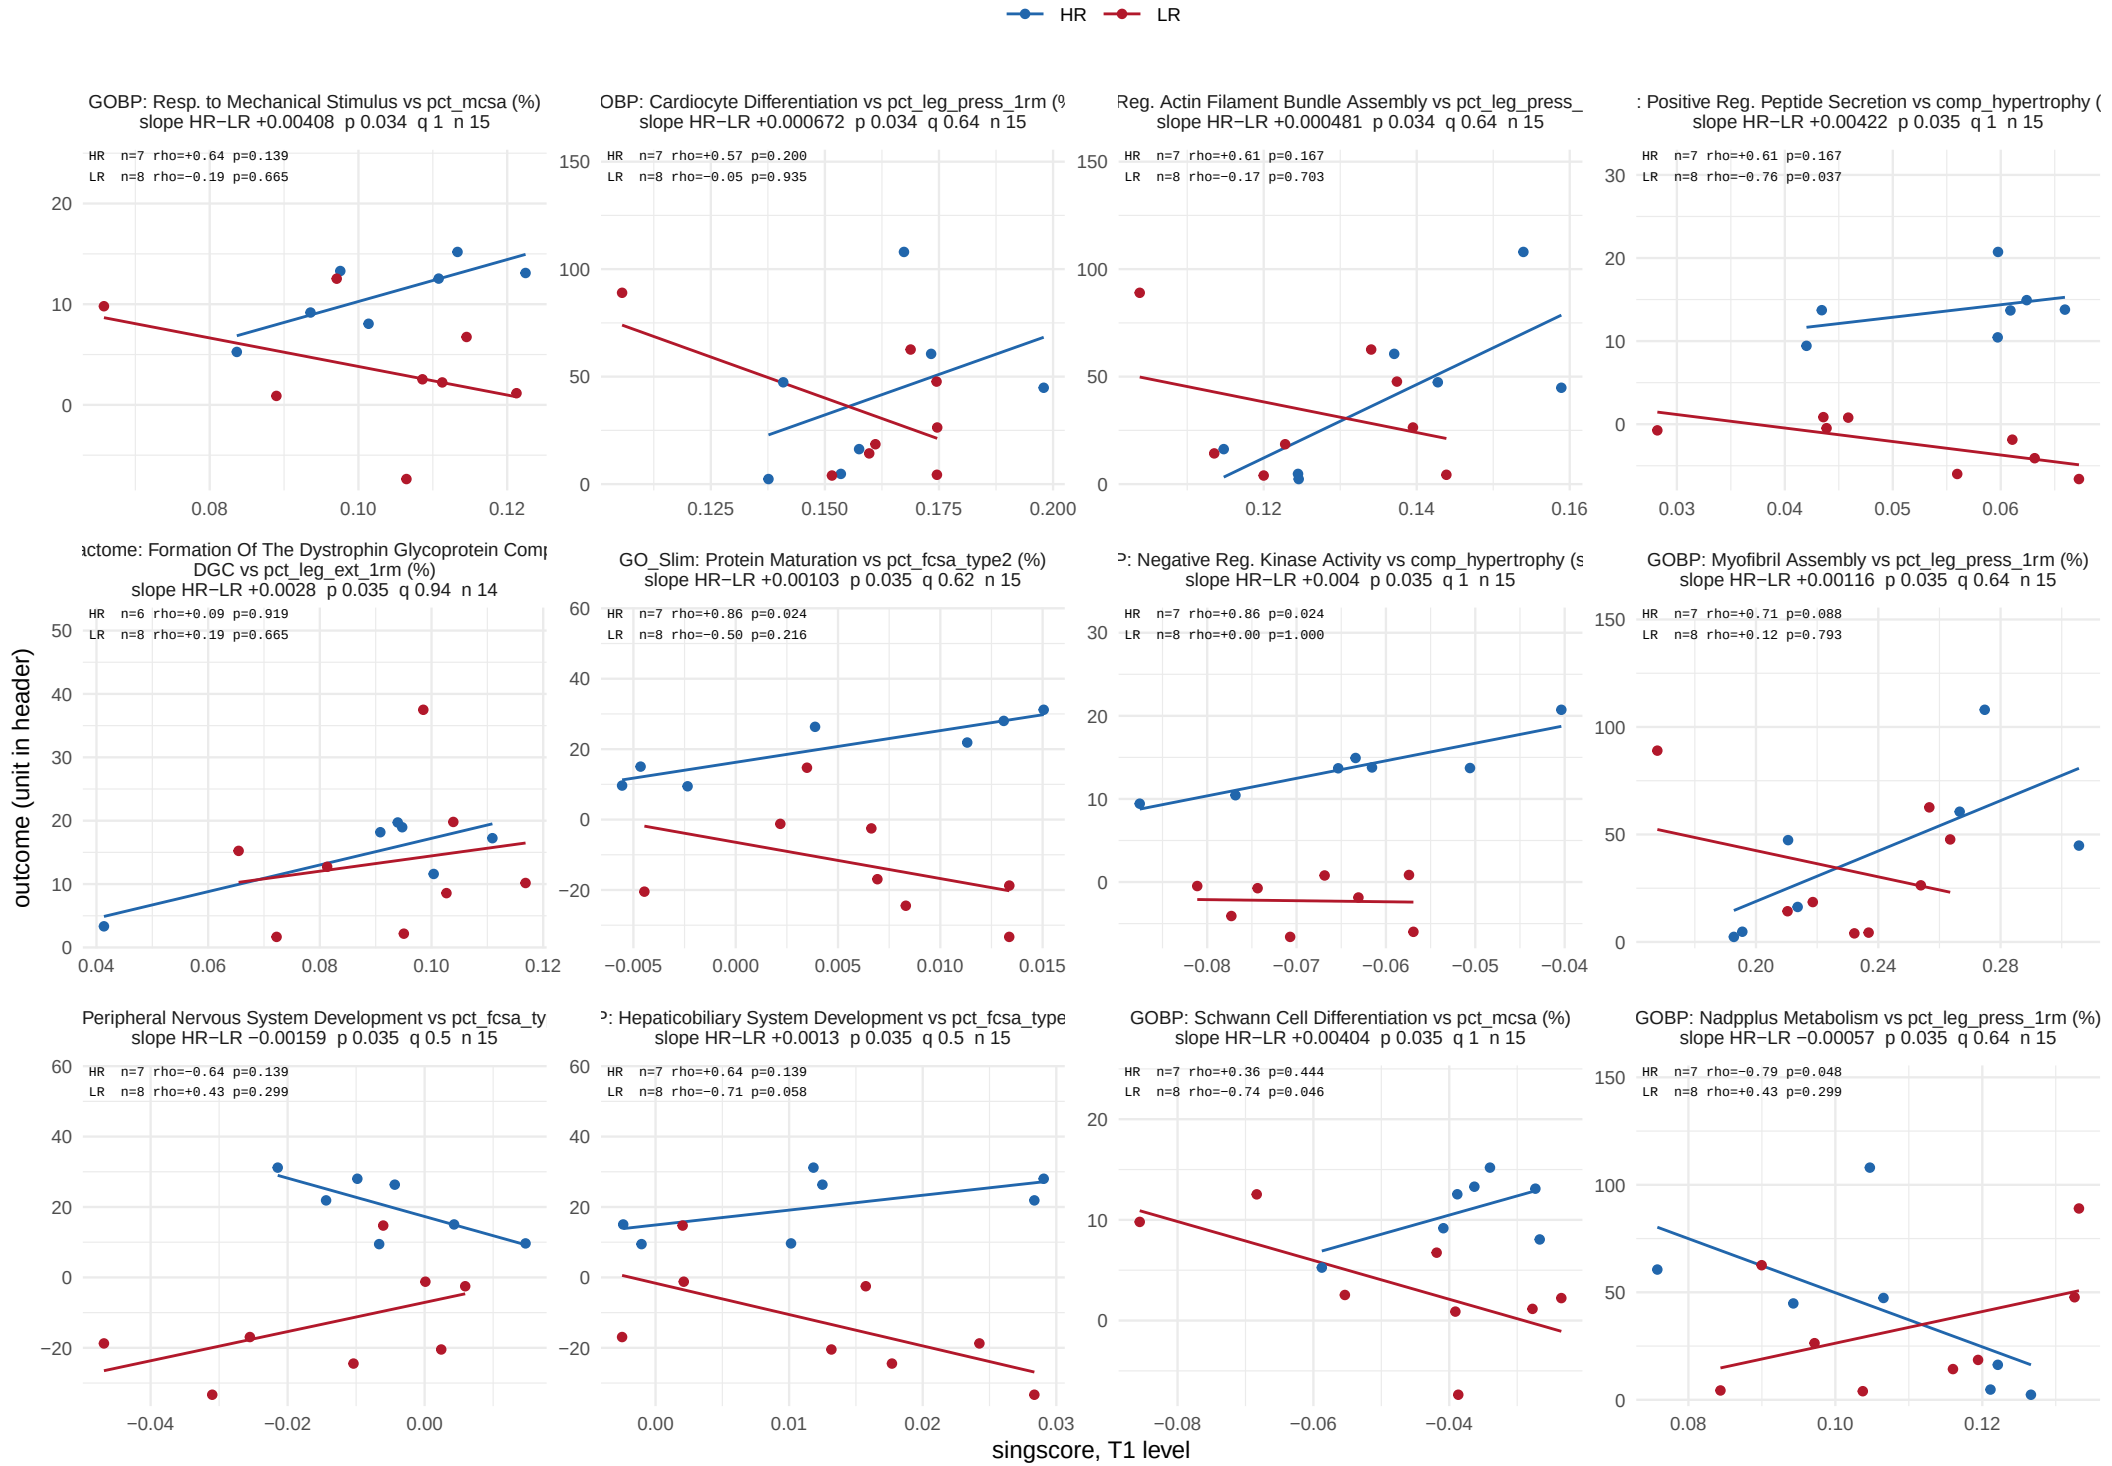


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

# Arm difference, baseline window


382 of 11024 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 22 of 32.

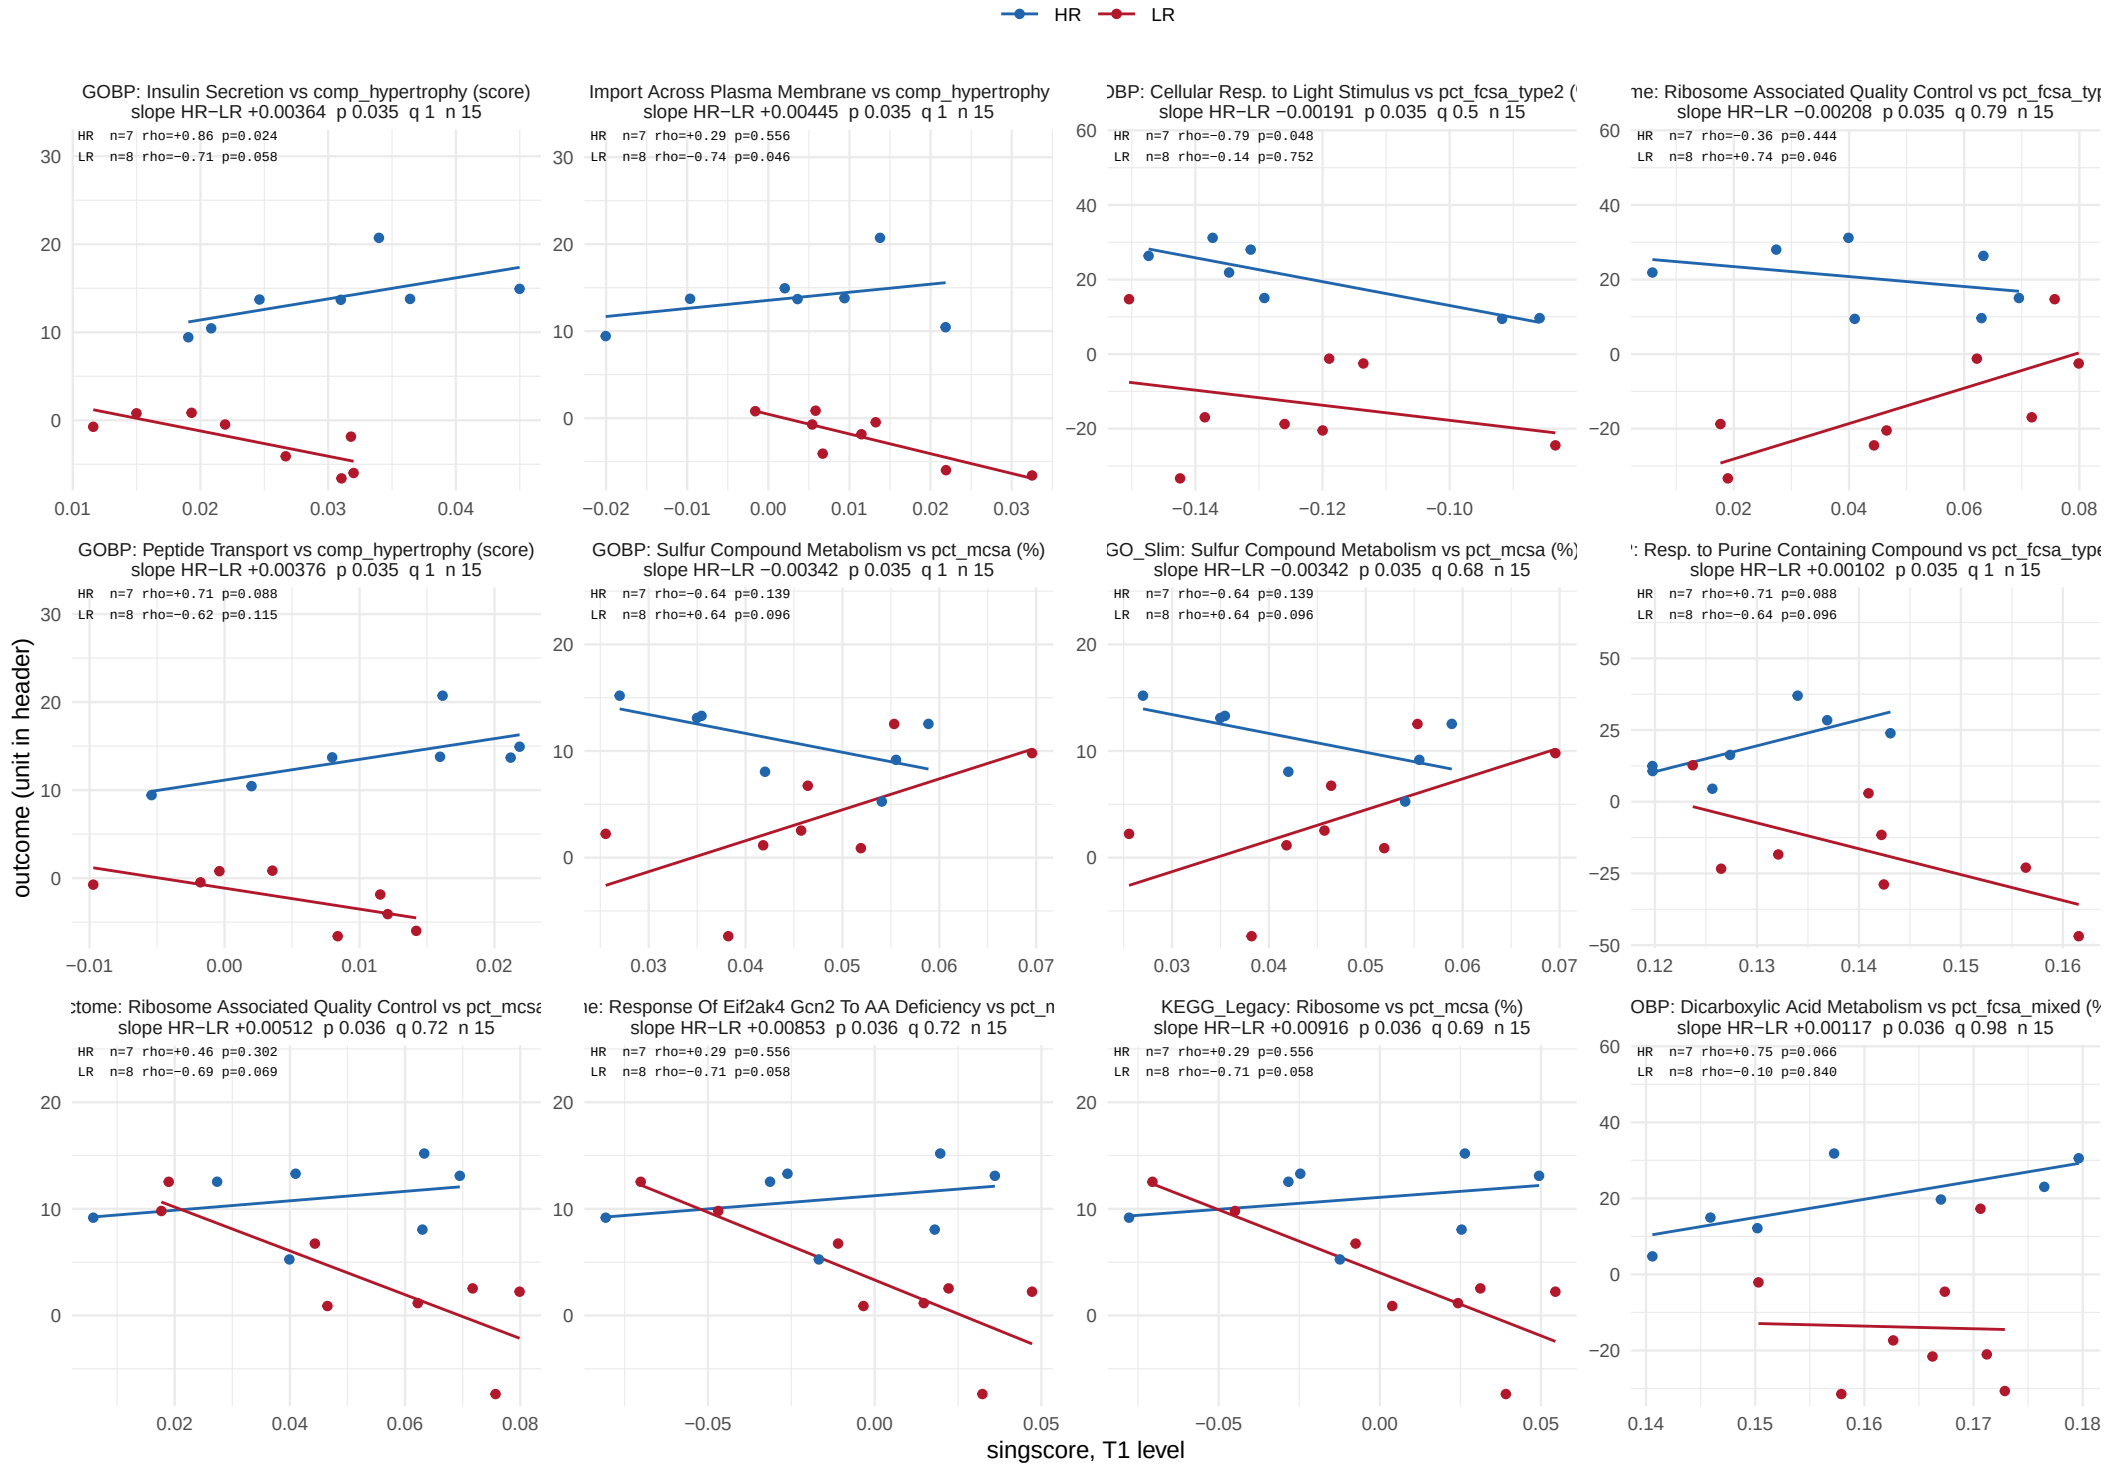


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, baseline window


382 of 11024 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 23 of 32.

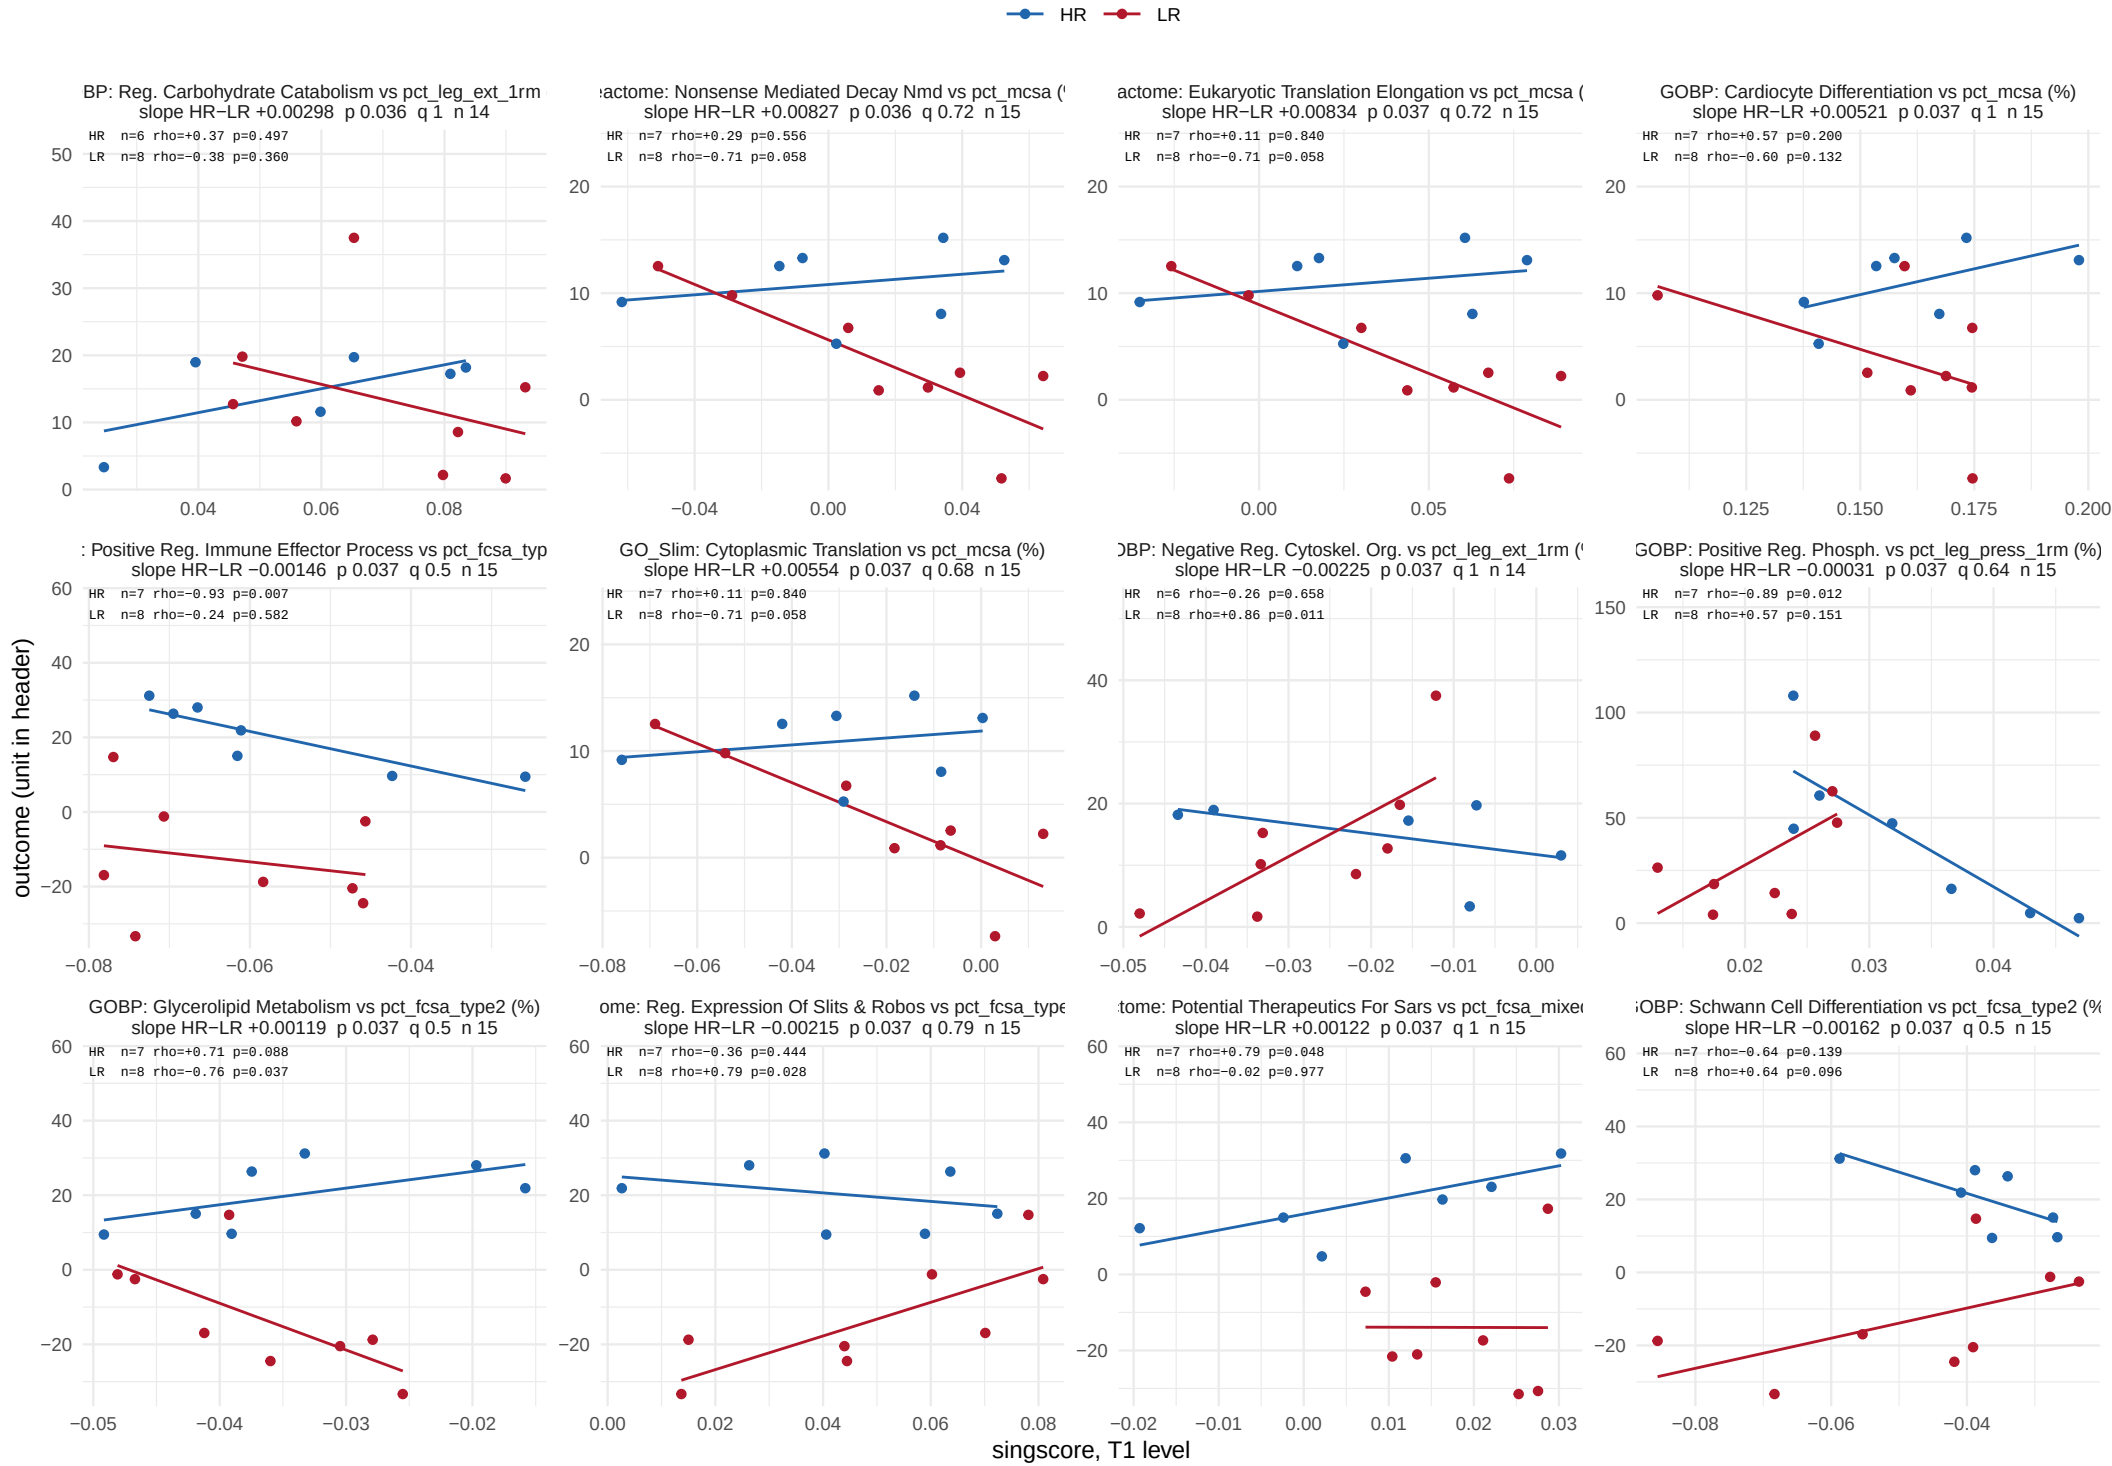


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, baseline window


382 of 11024 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 24 of 32.

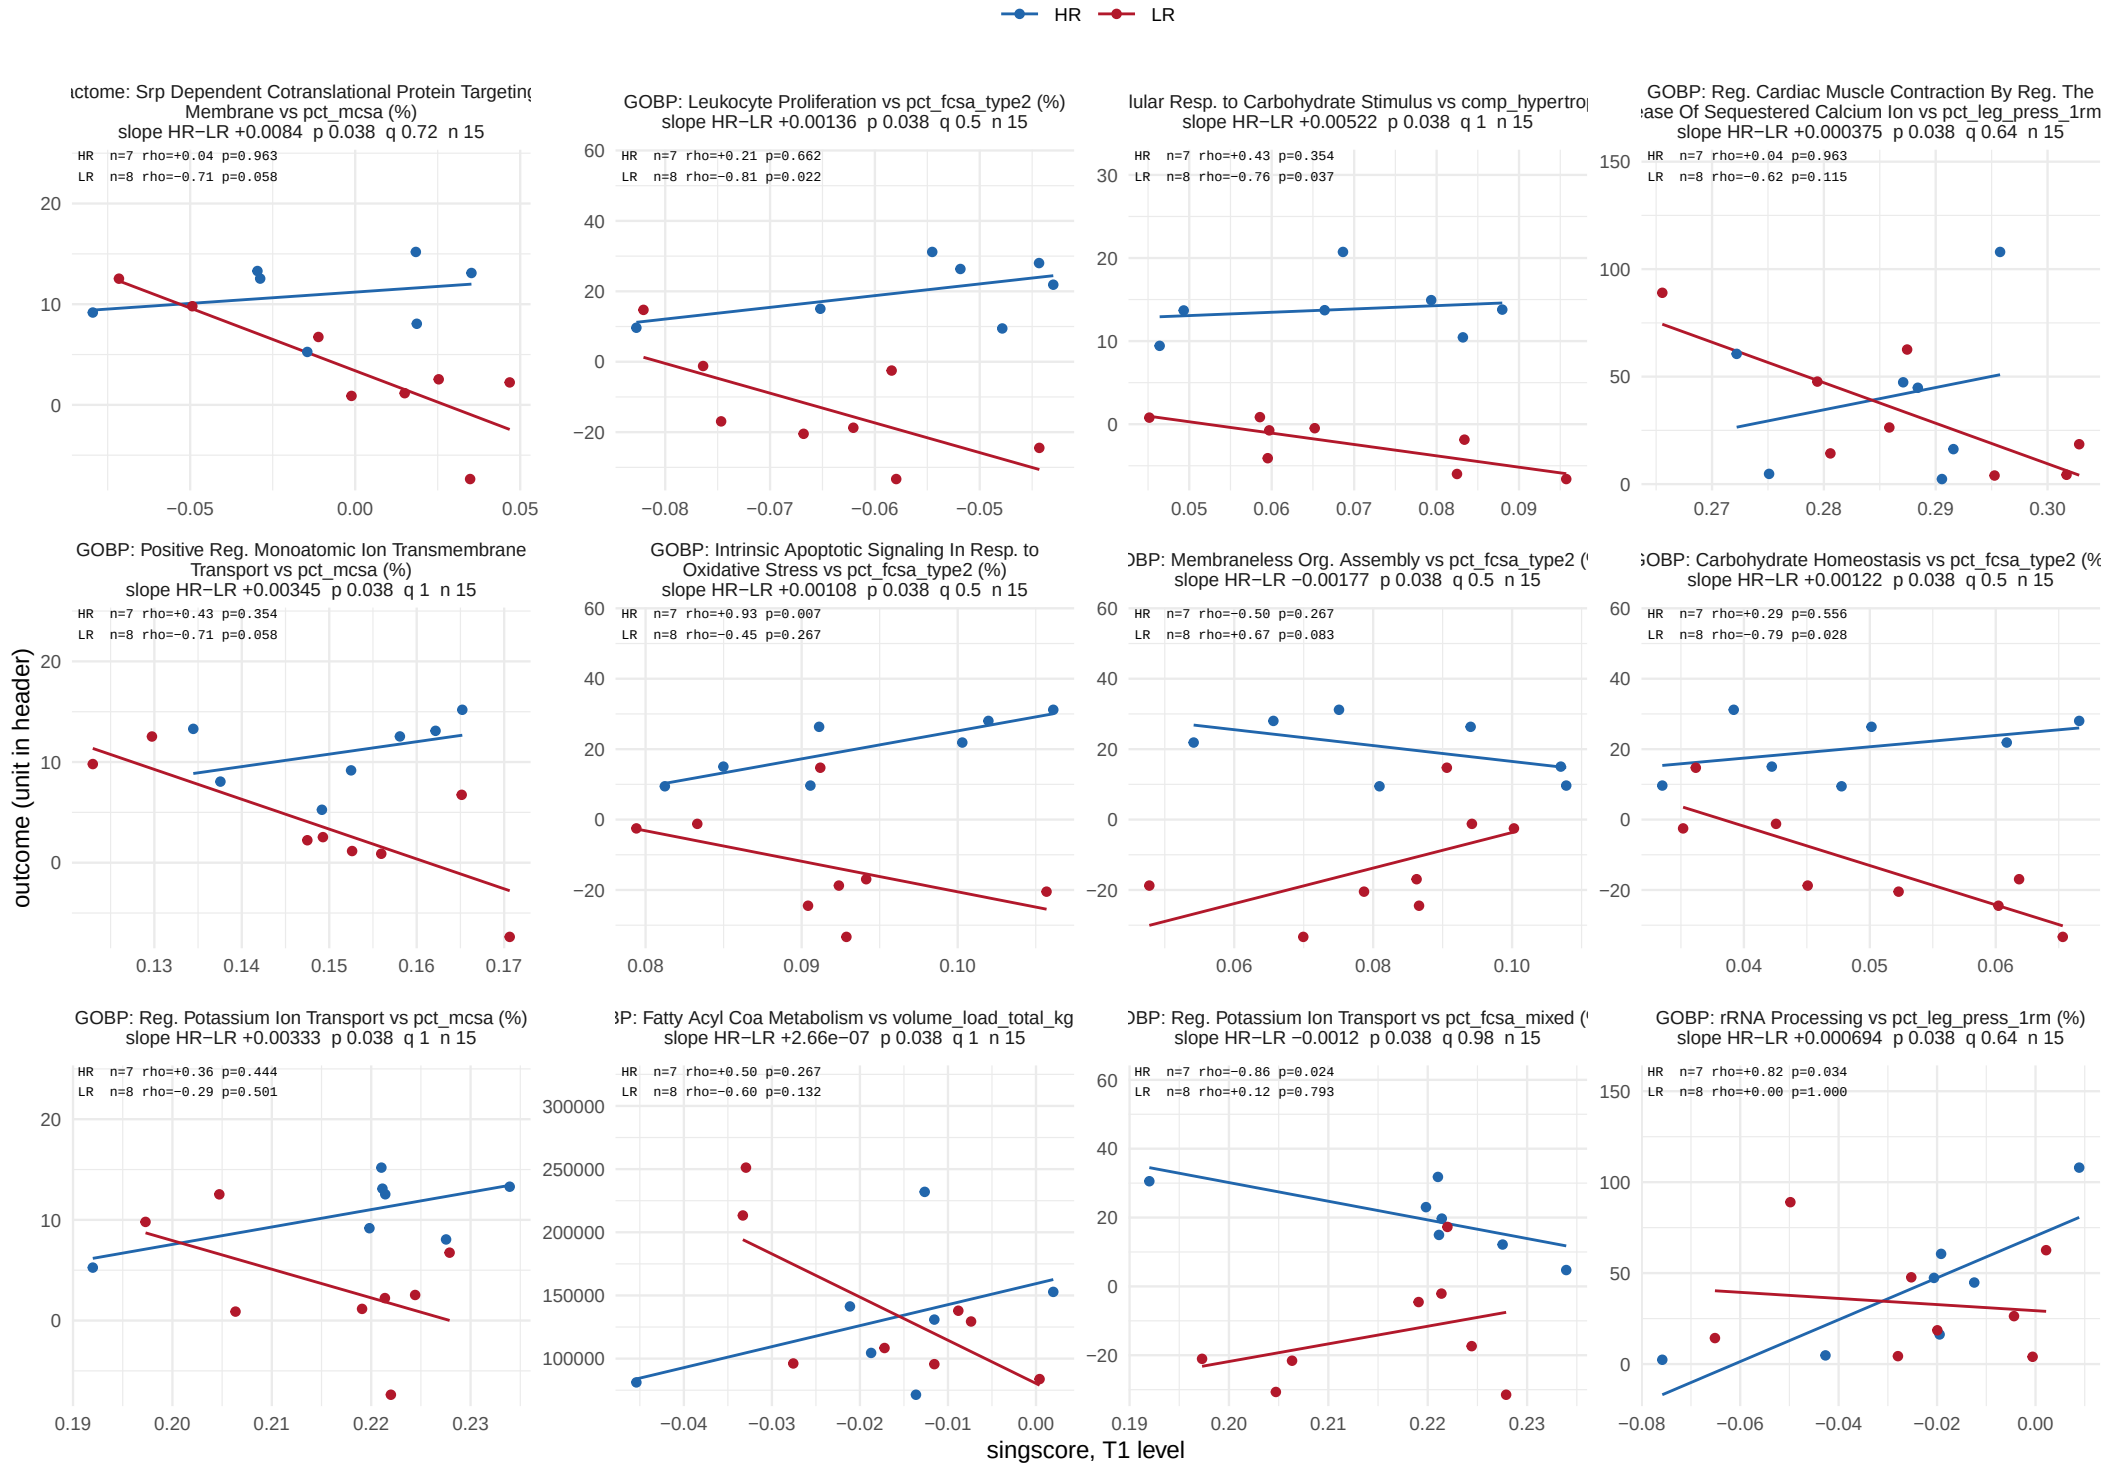


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, baseline window


382 of 11024 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 25 of 32.

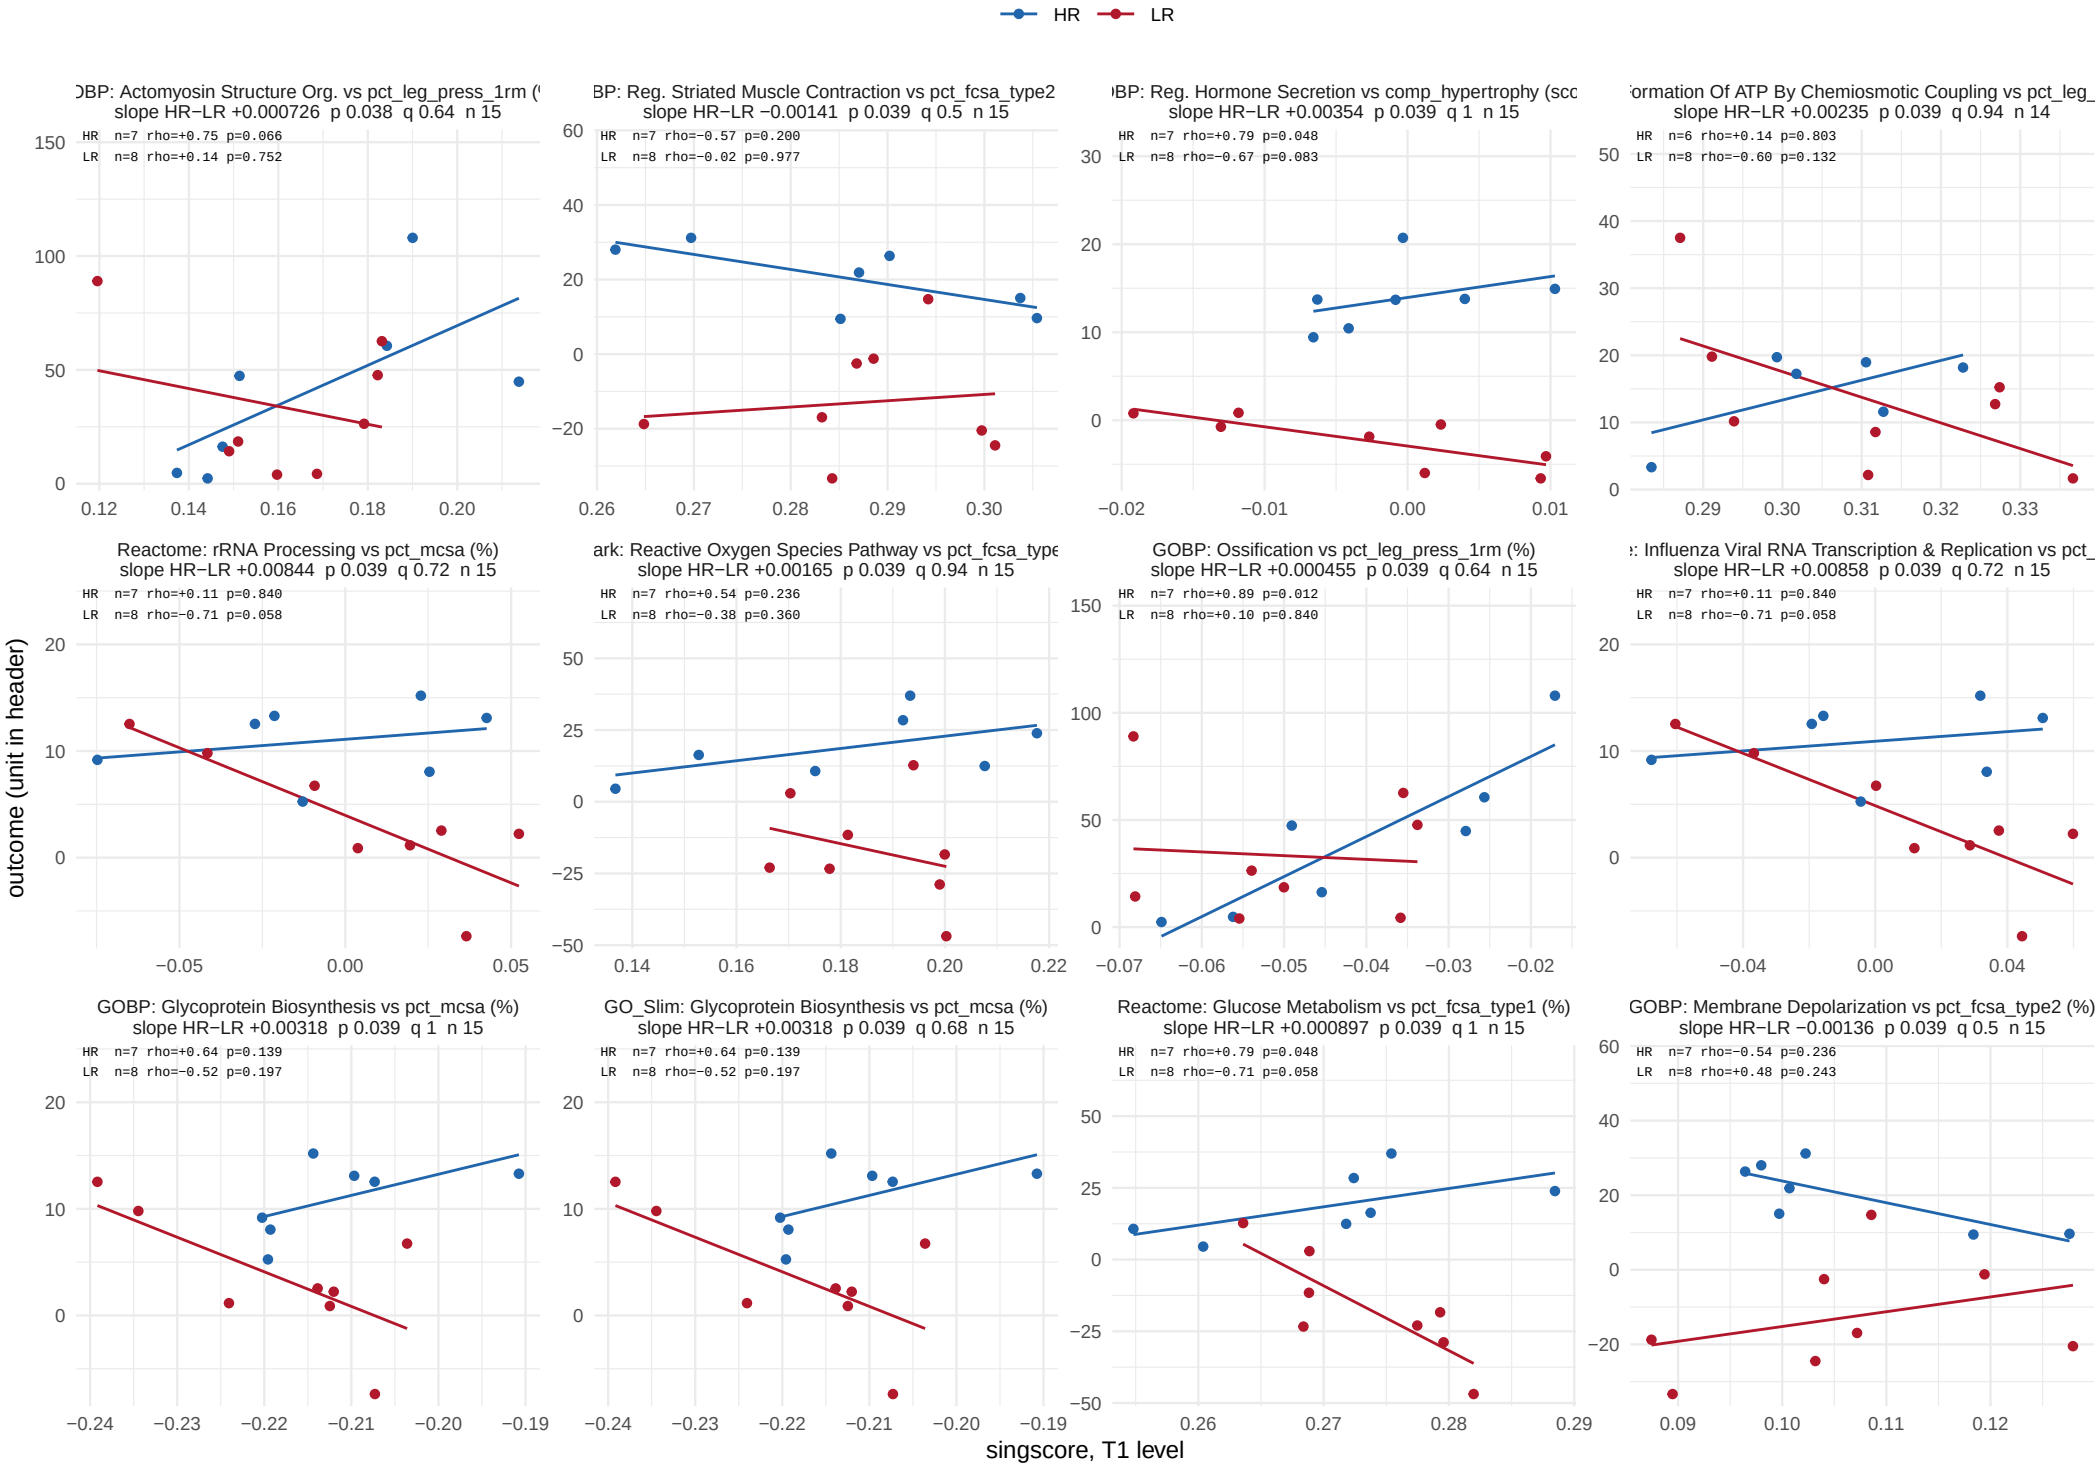


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, baseline window


382 of 11024 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 26 of 32.

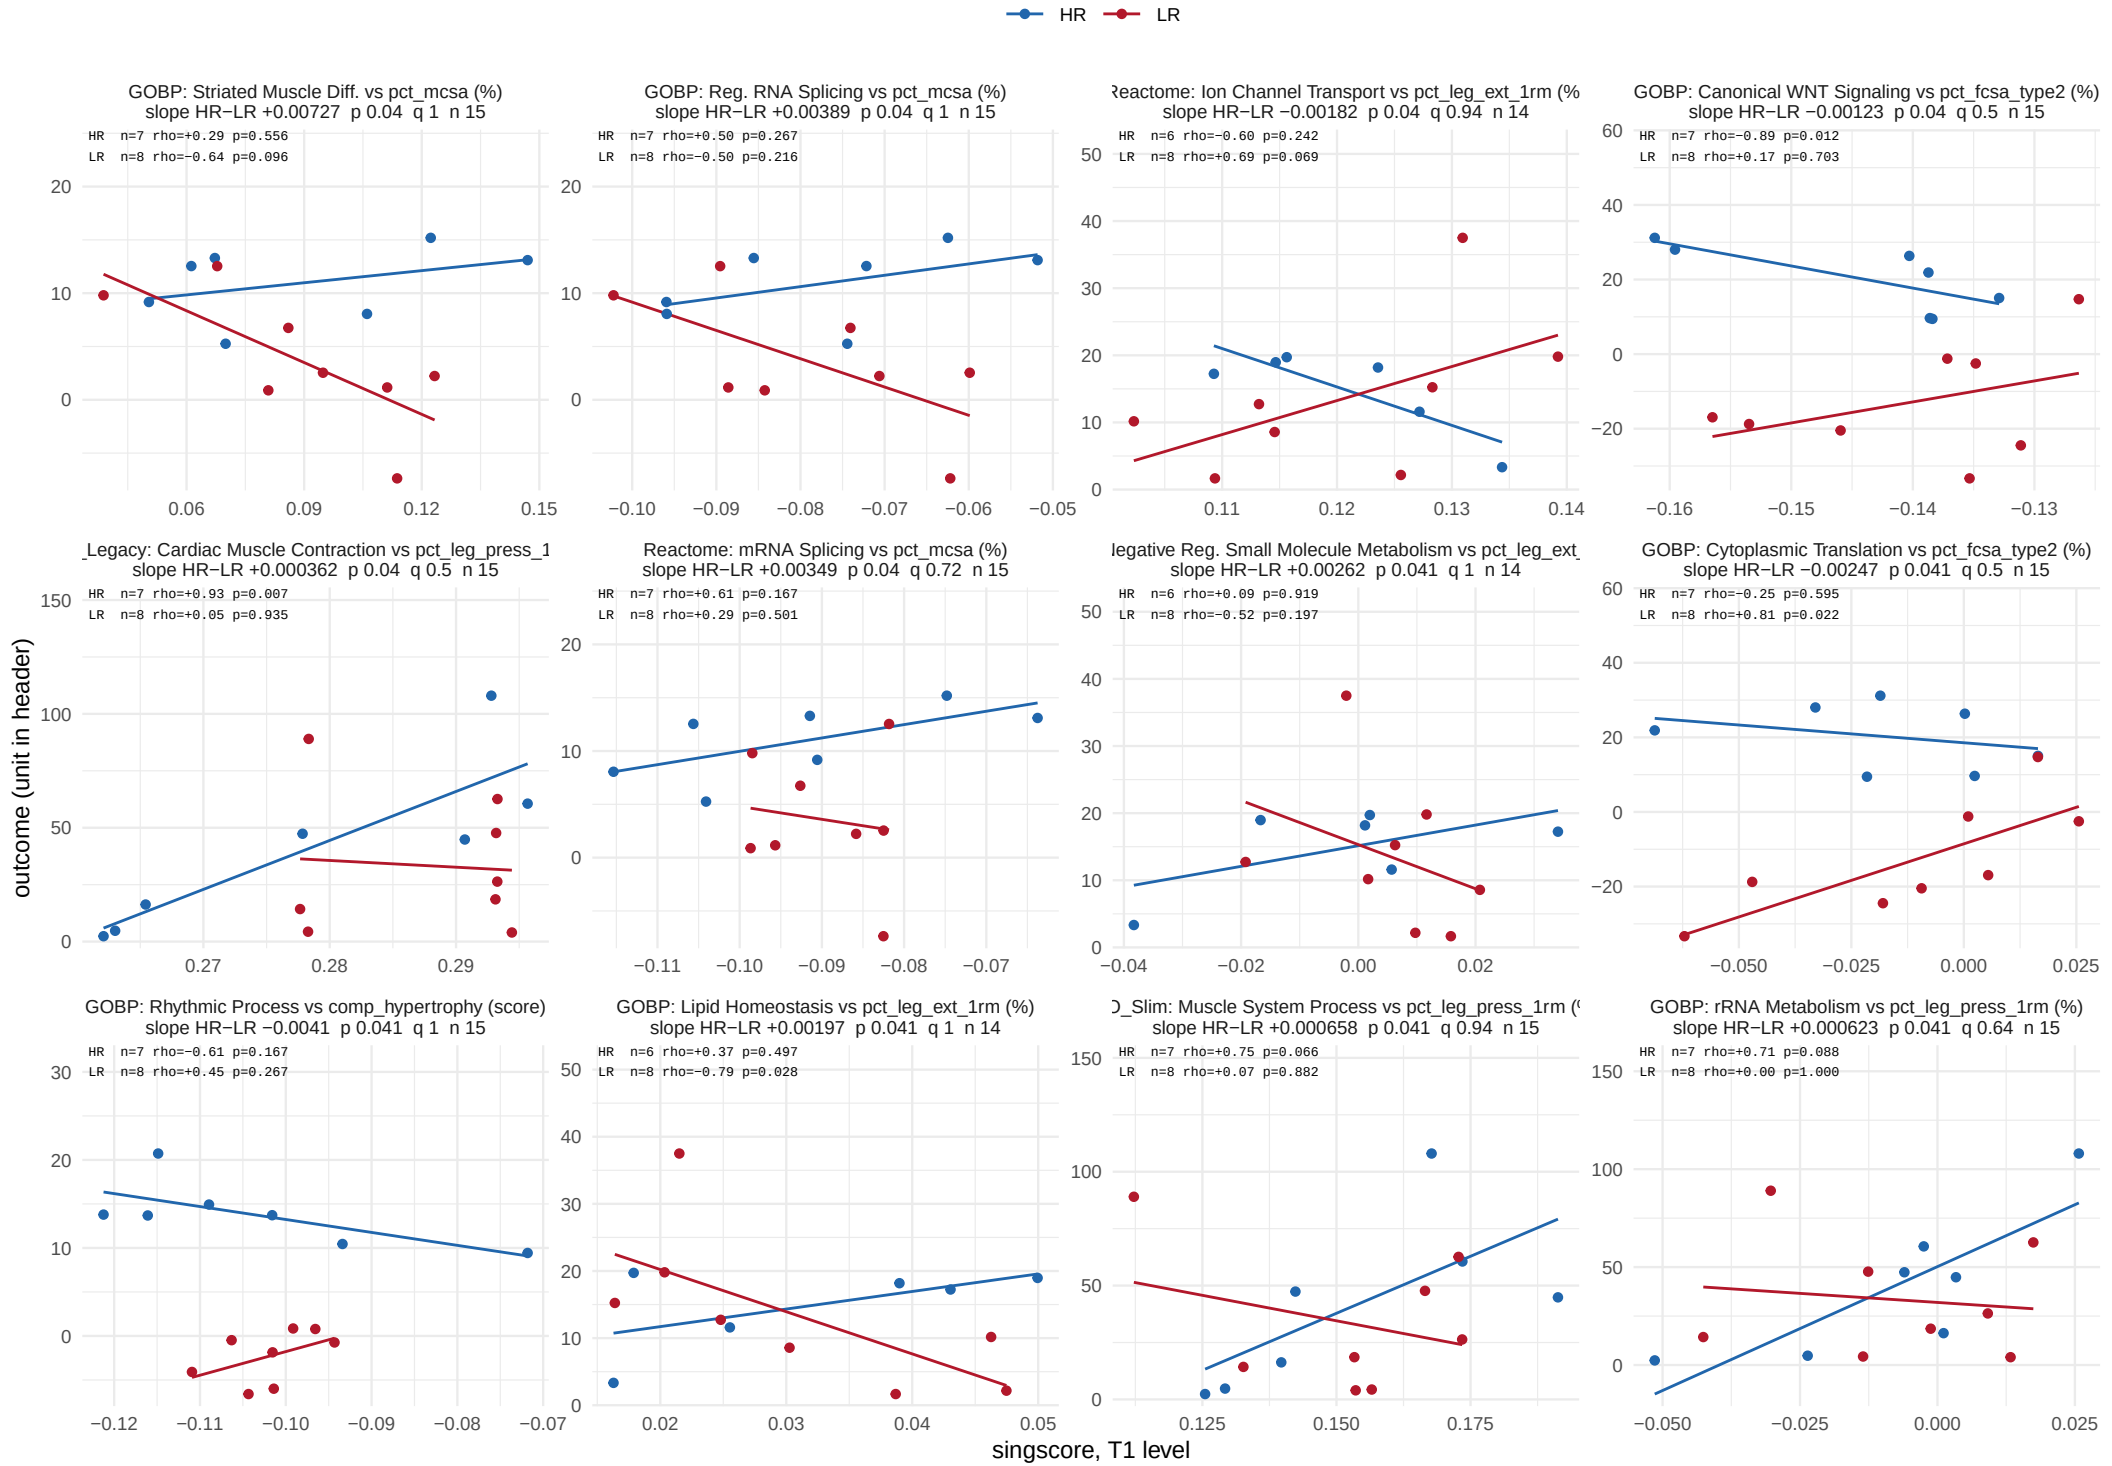


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, baseline window


382 of 11024 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 27 of 32.

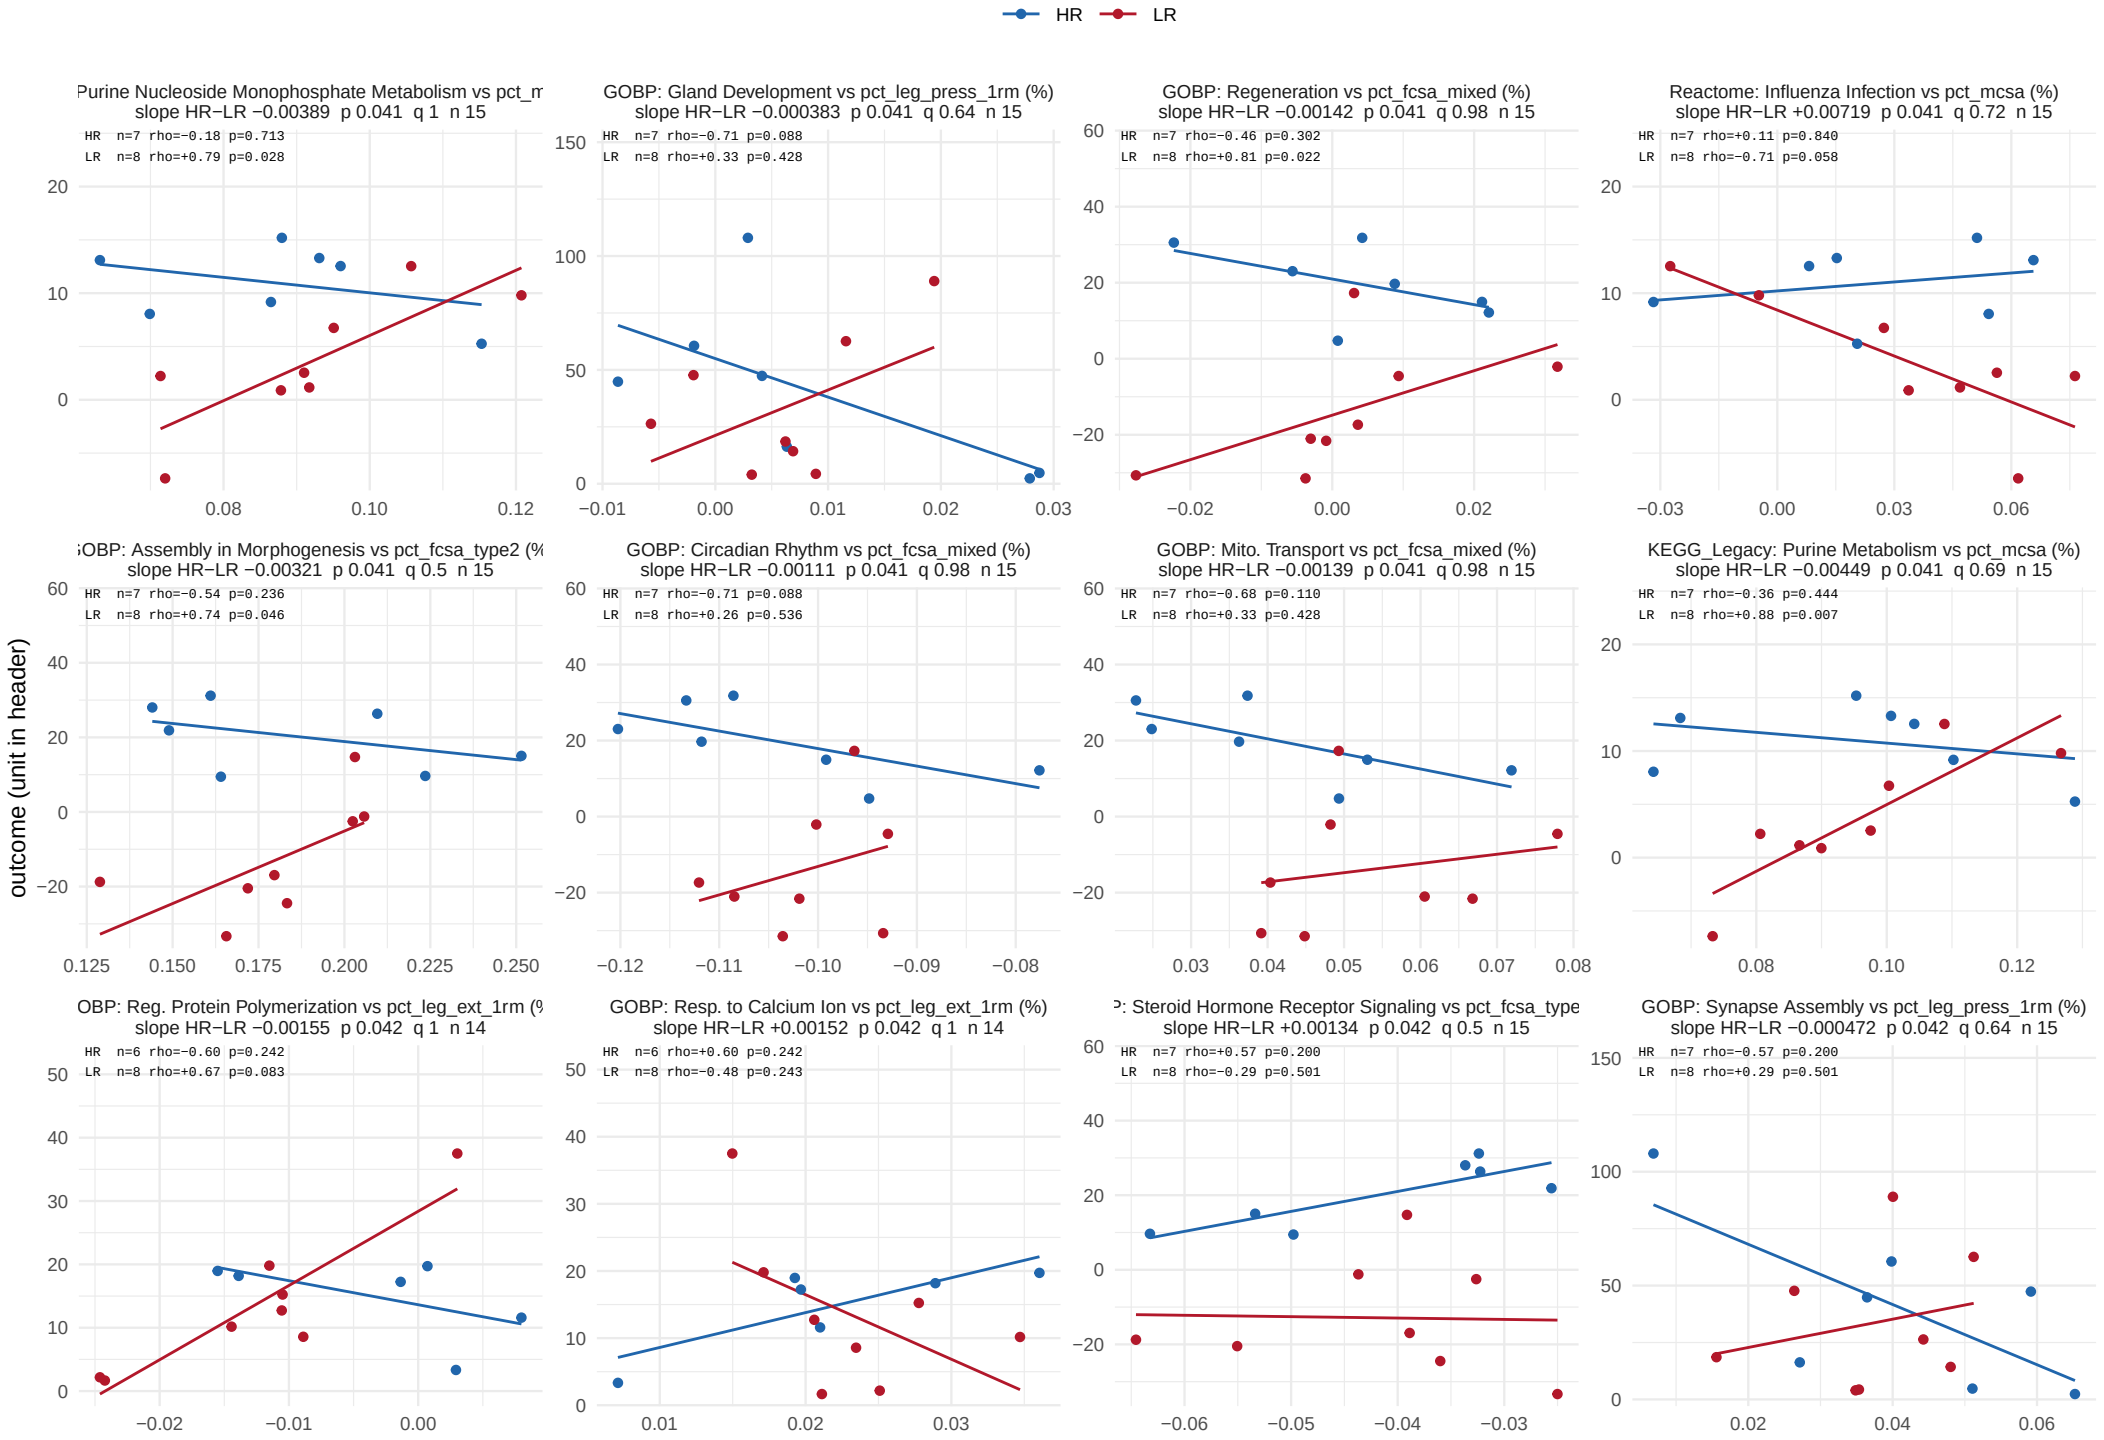


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, baseline window


382 of 11024 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 28 of 32.

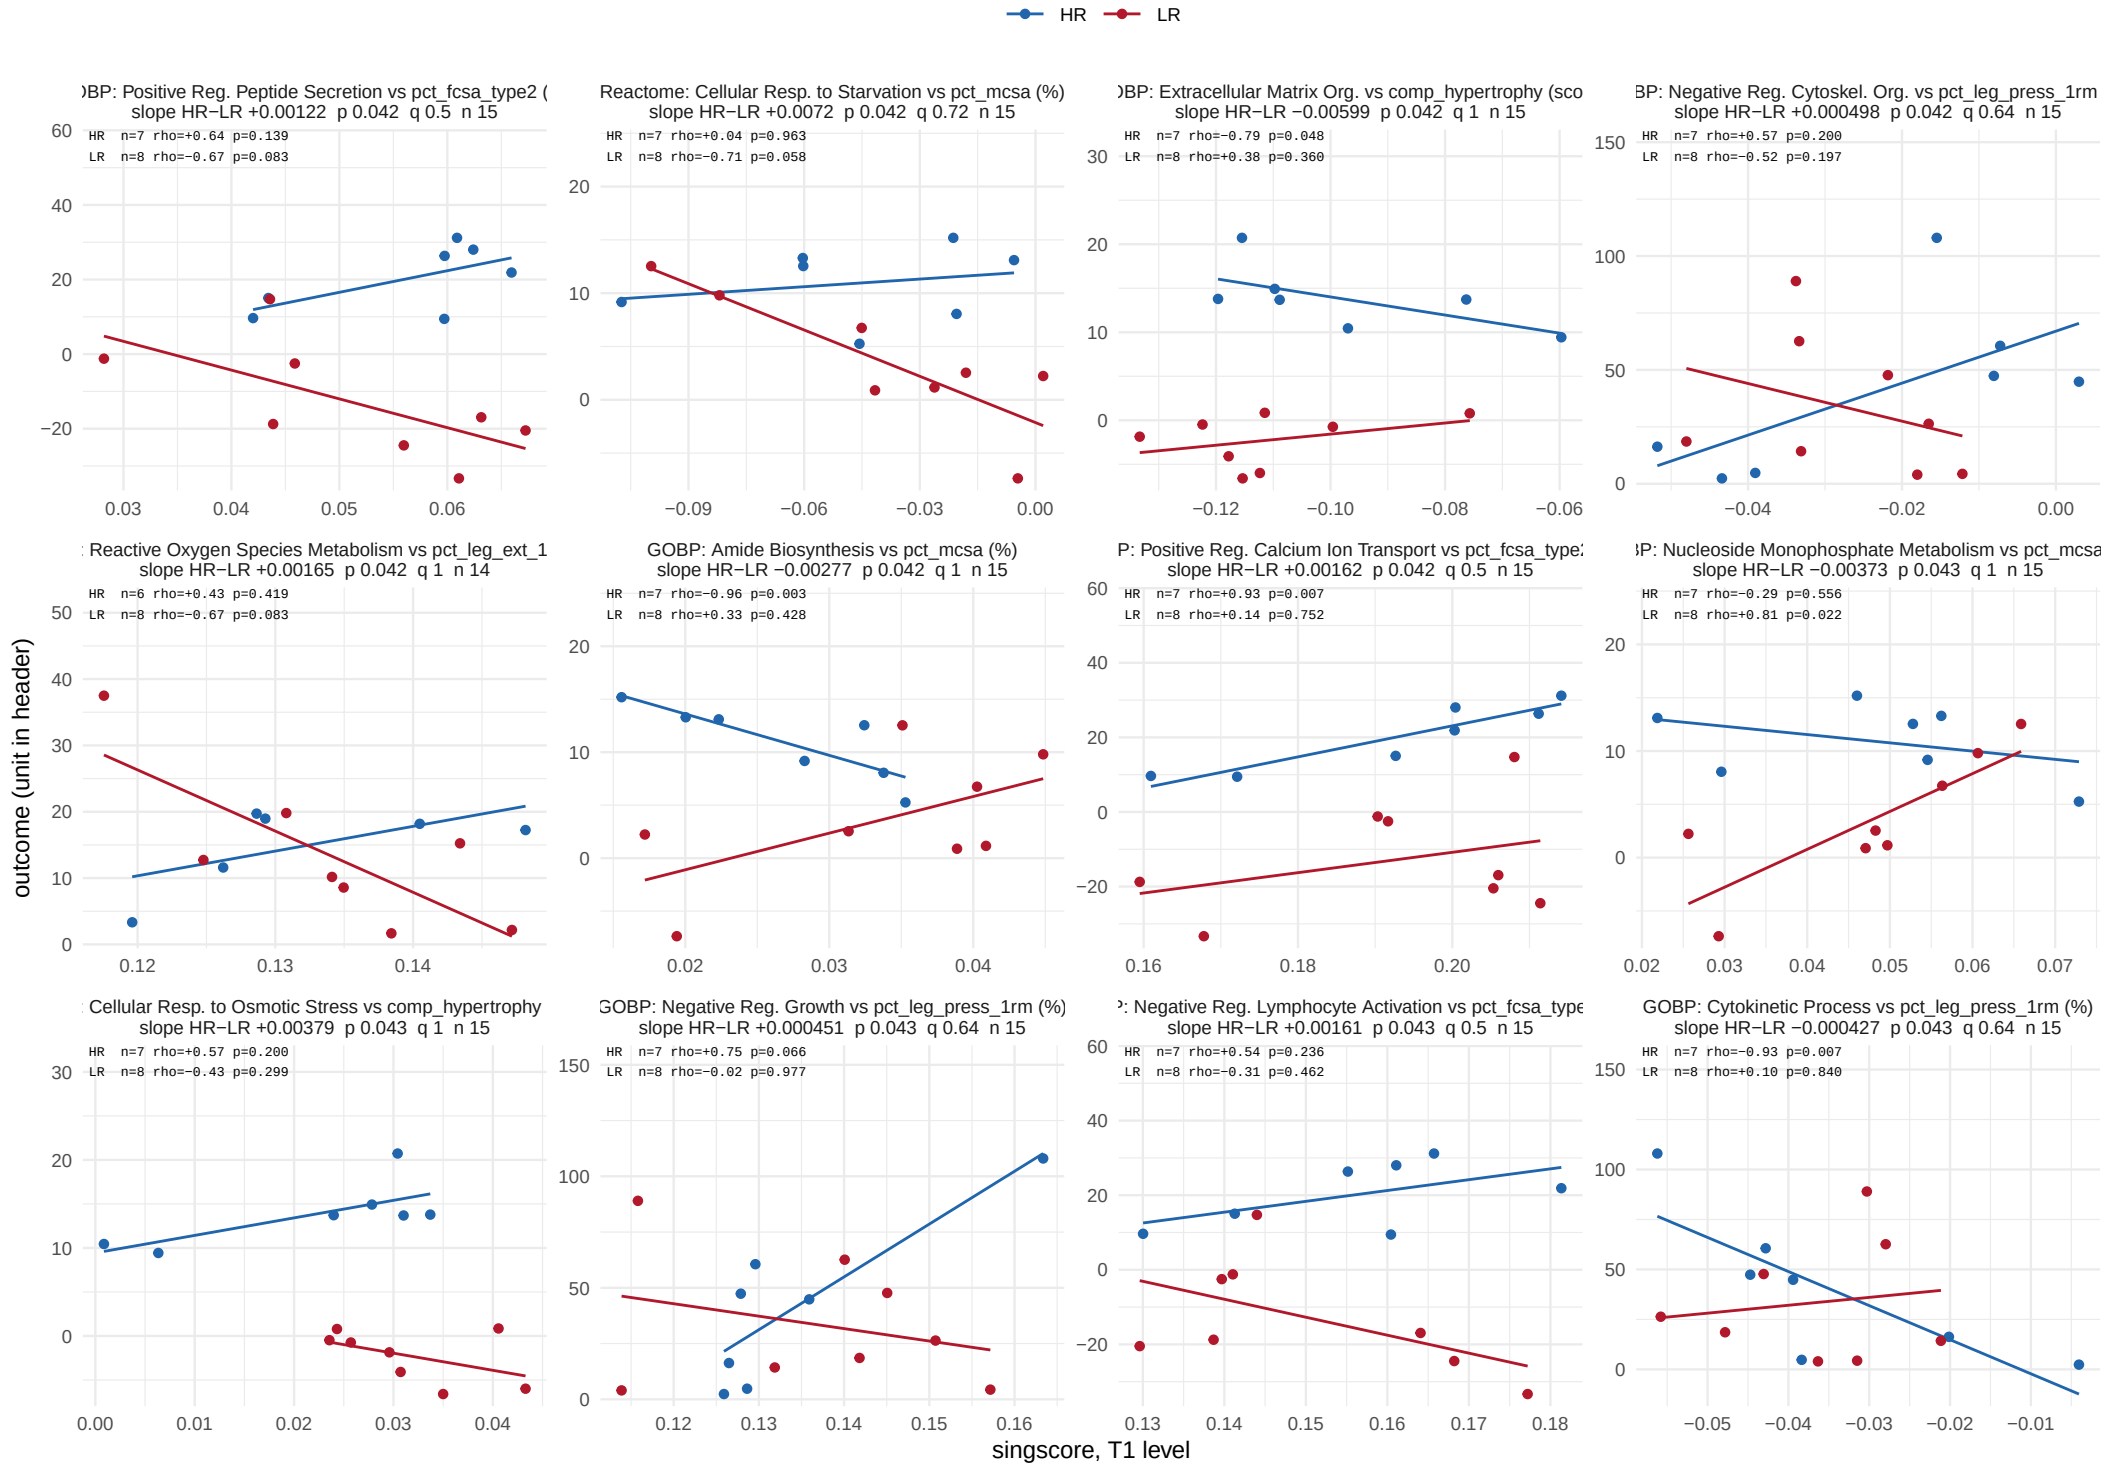


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, baseline window


382 of 11024 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 29 of 32.

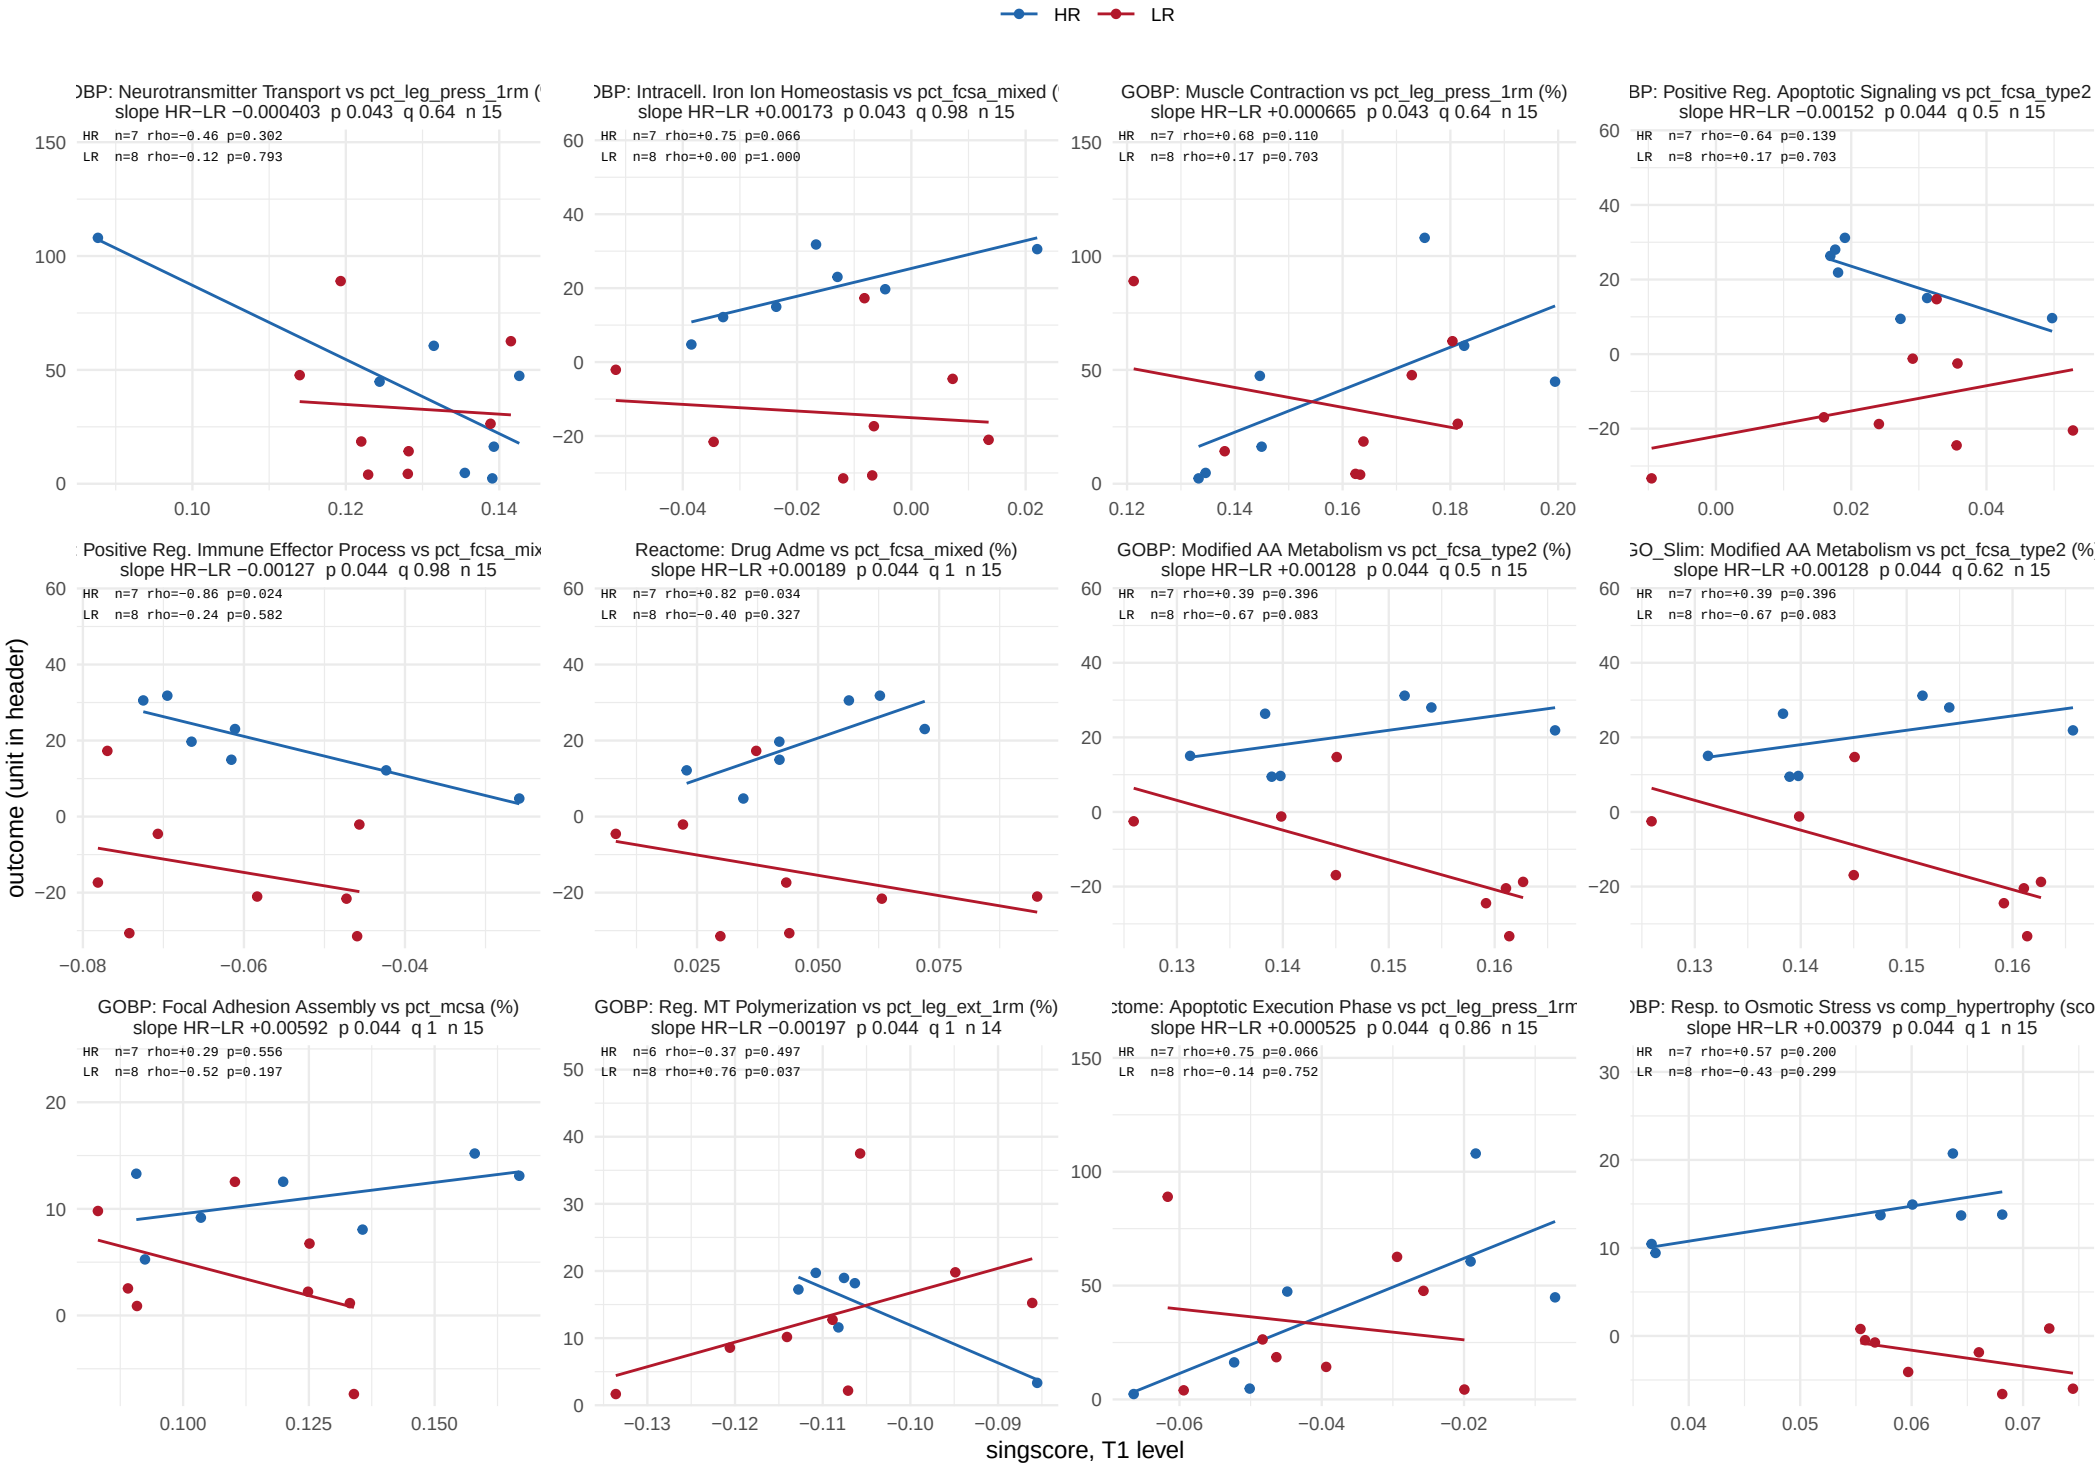


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, baseline window


382 of 11024 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 30 of 32.

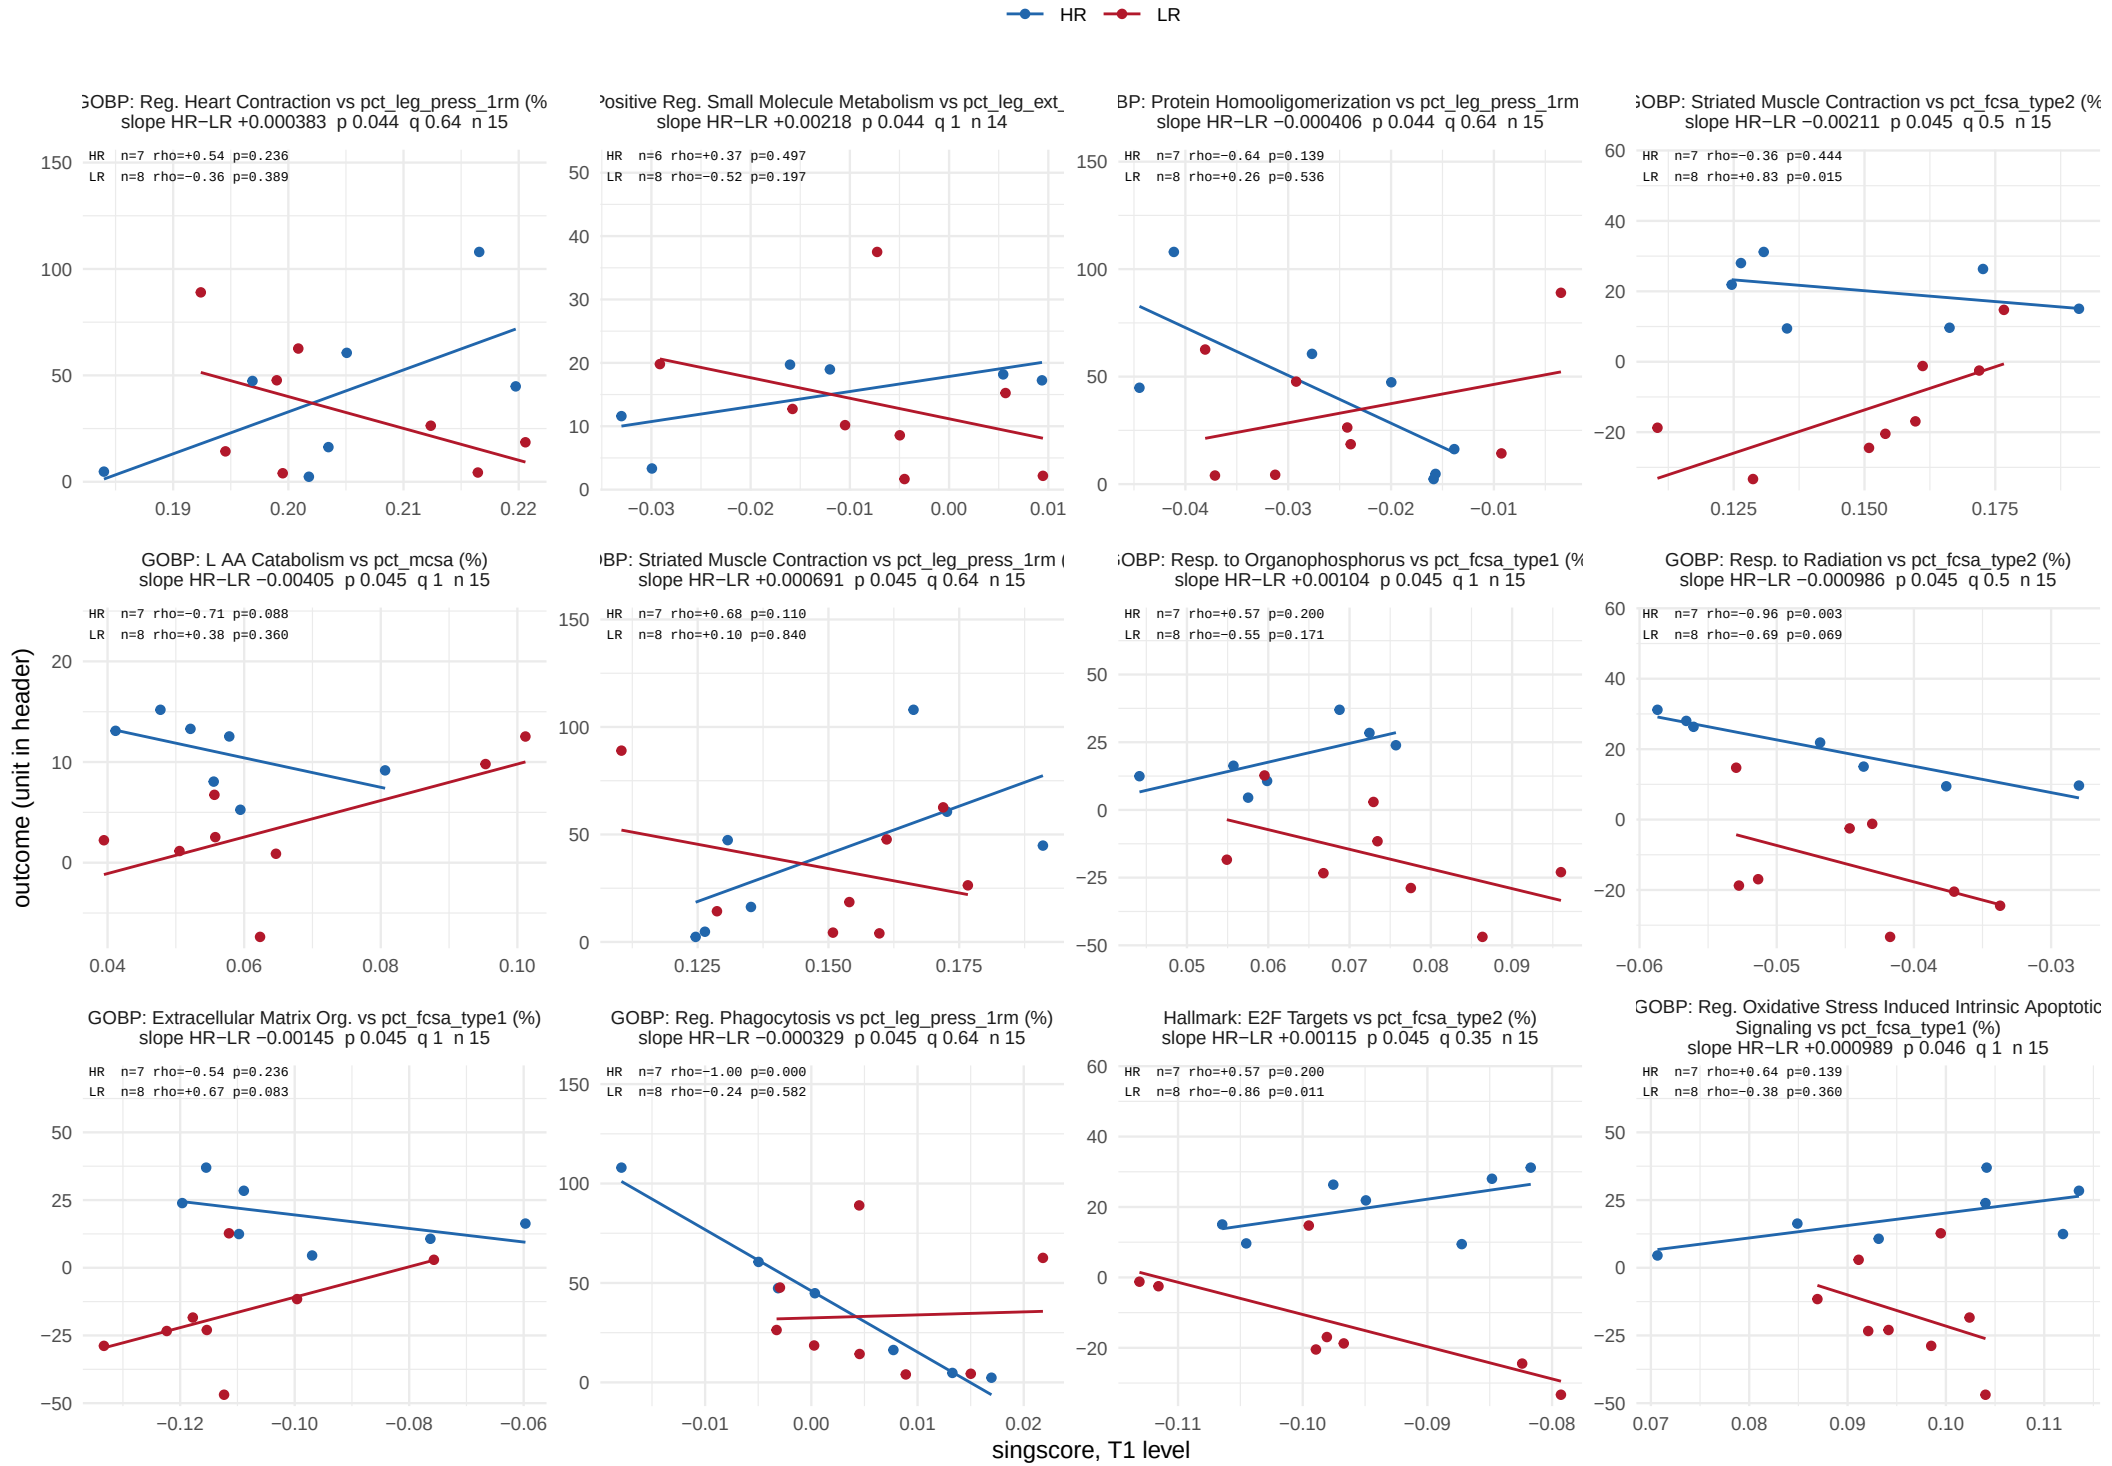


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, baseline window


382 of 11024 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 31 of 32.

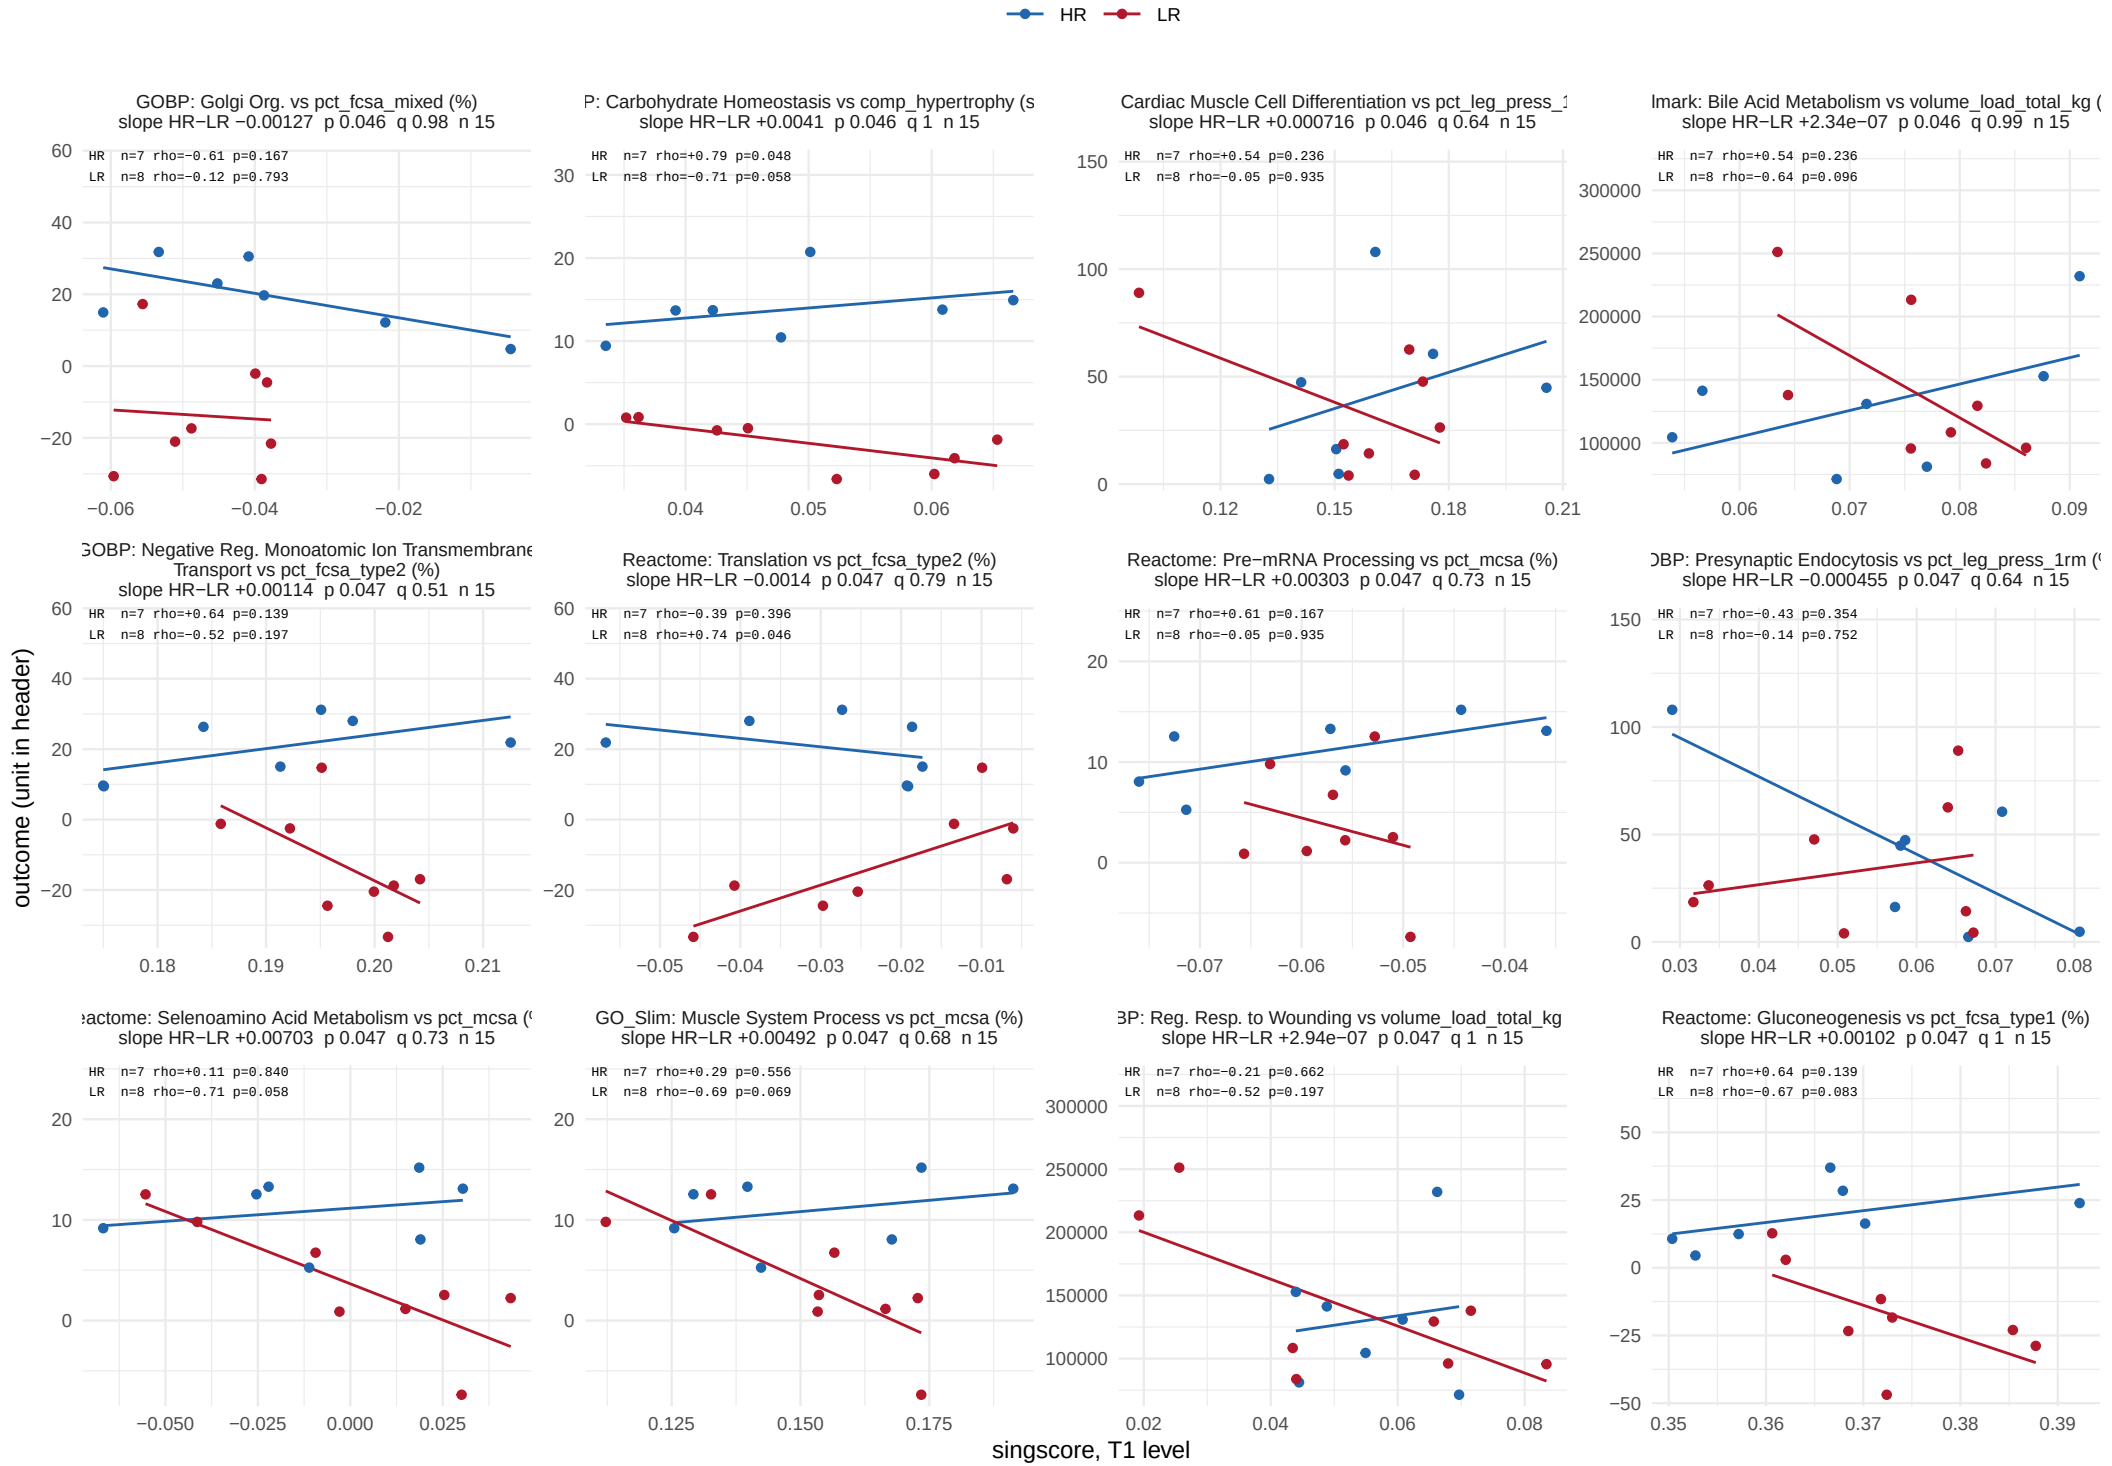


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, baseline window


382 of 11024 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 32 of 32.

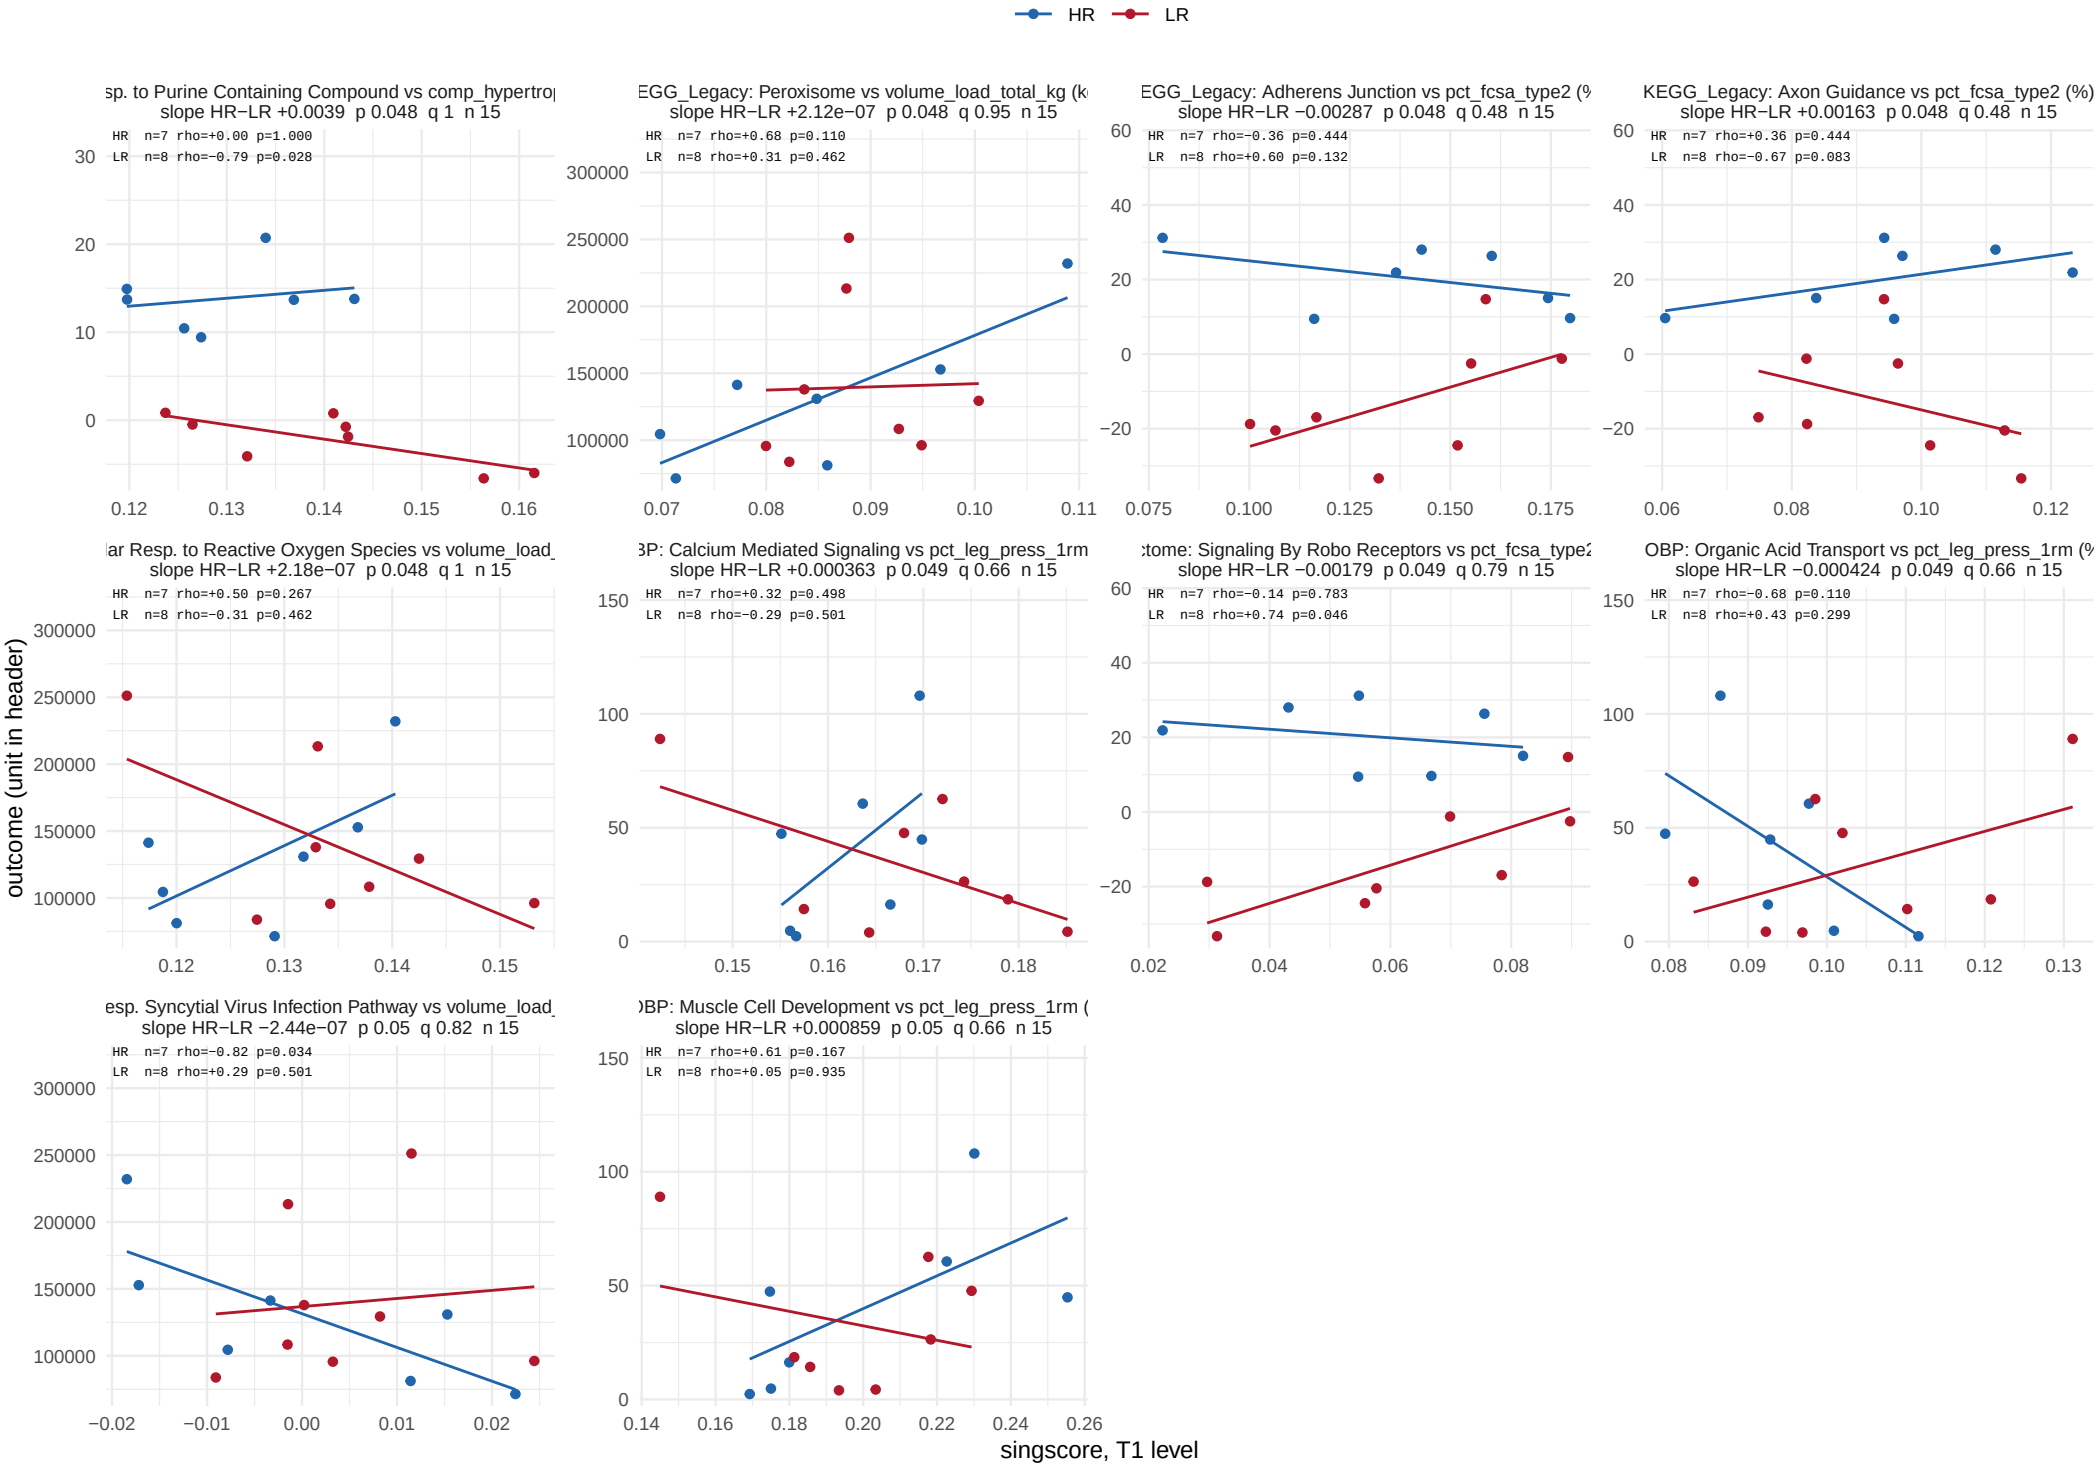


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, acute window


643 of 11024 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 1 of 54.

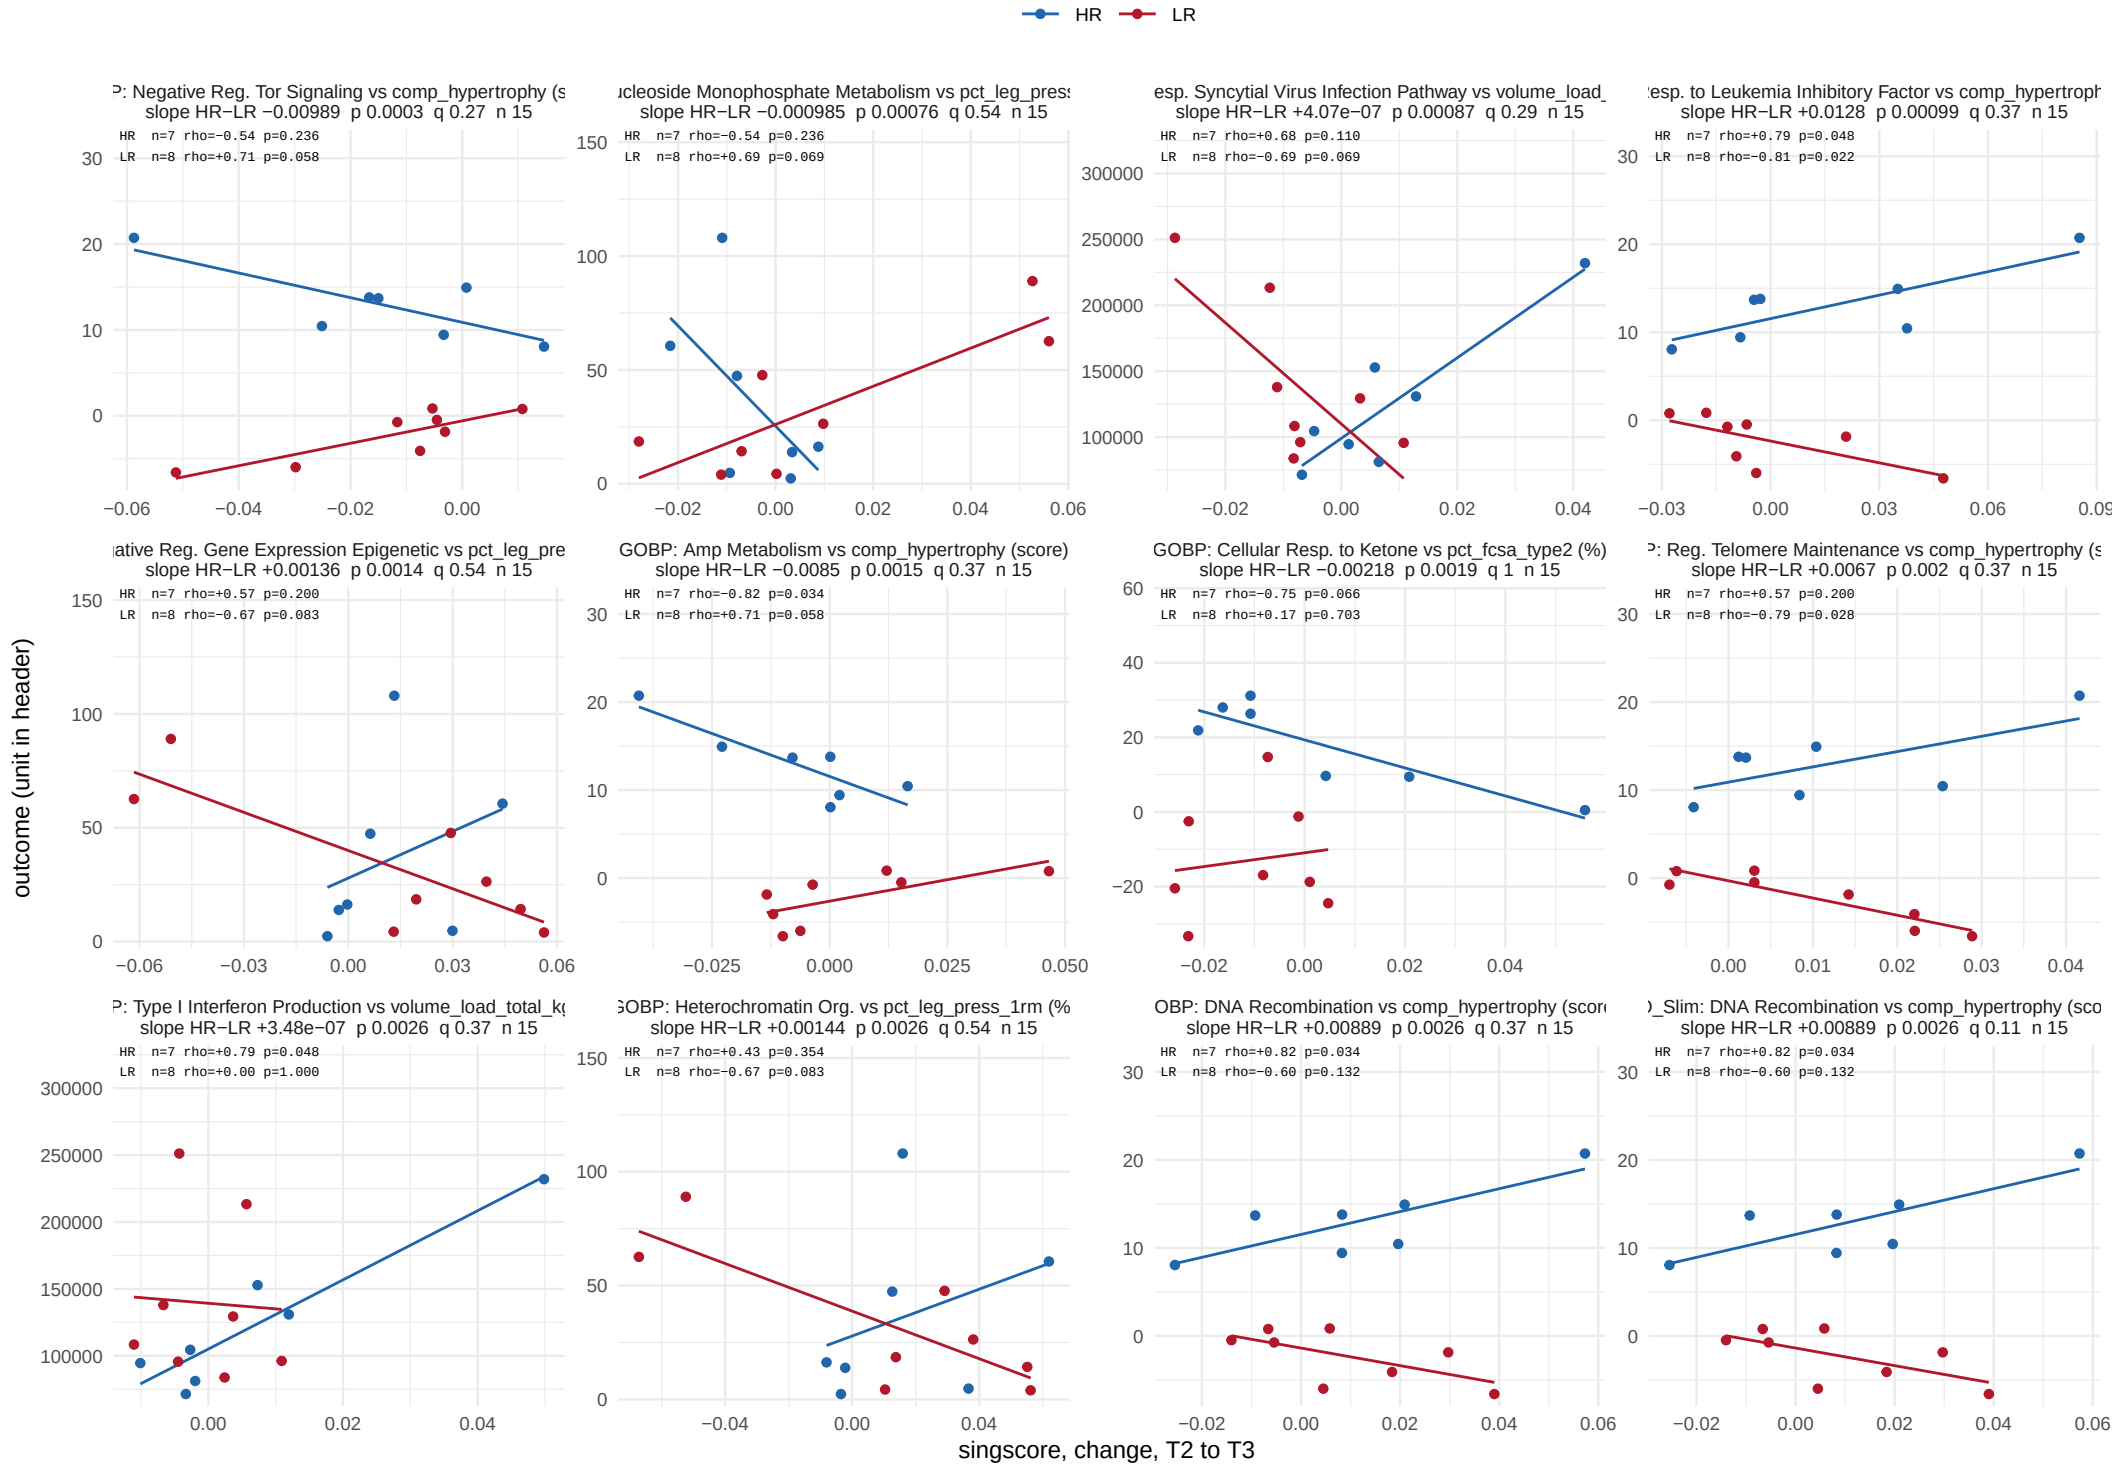


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, acute window


643 of 11024 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 2 of 54.

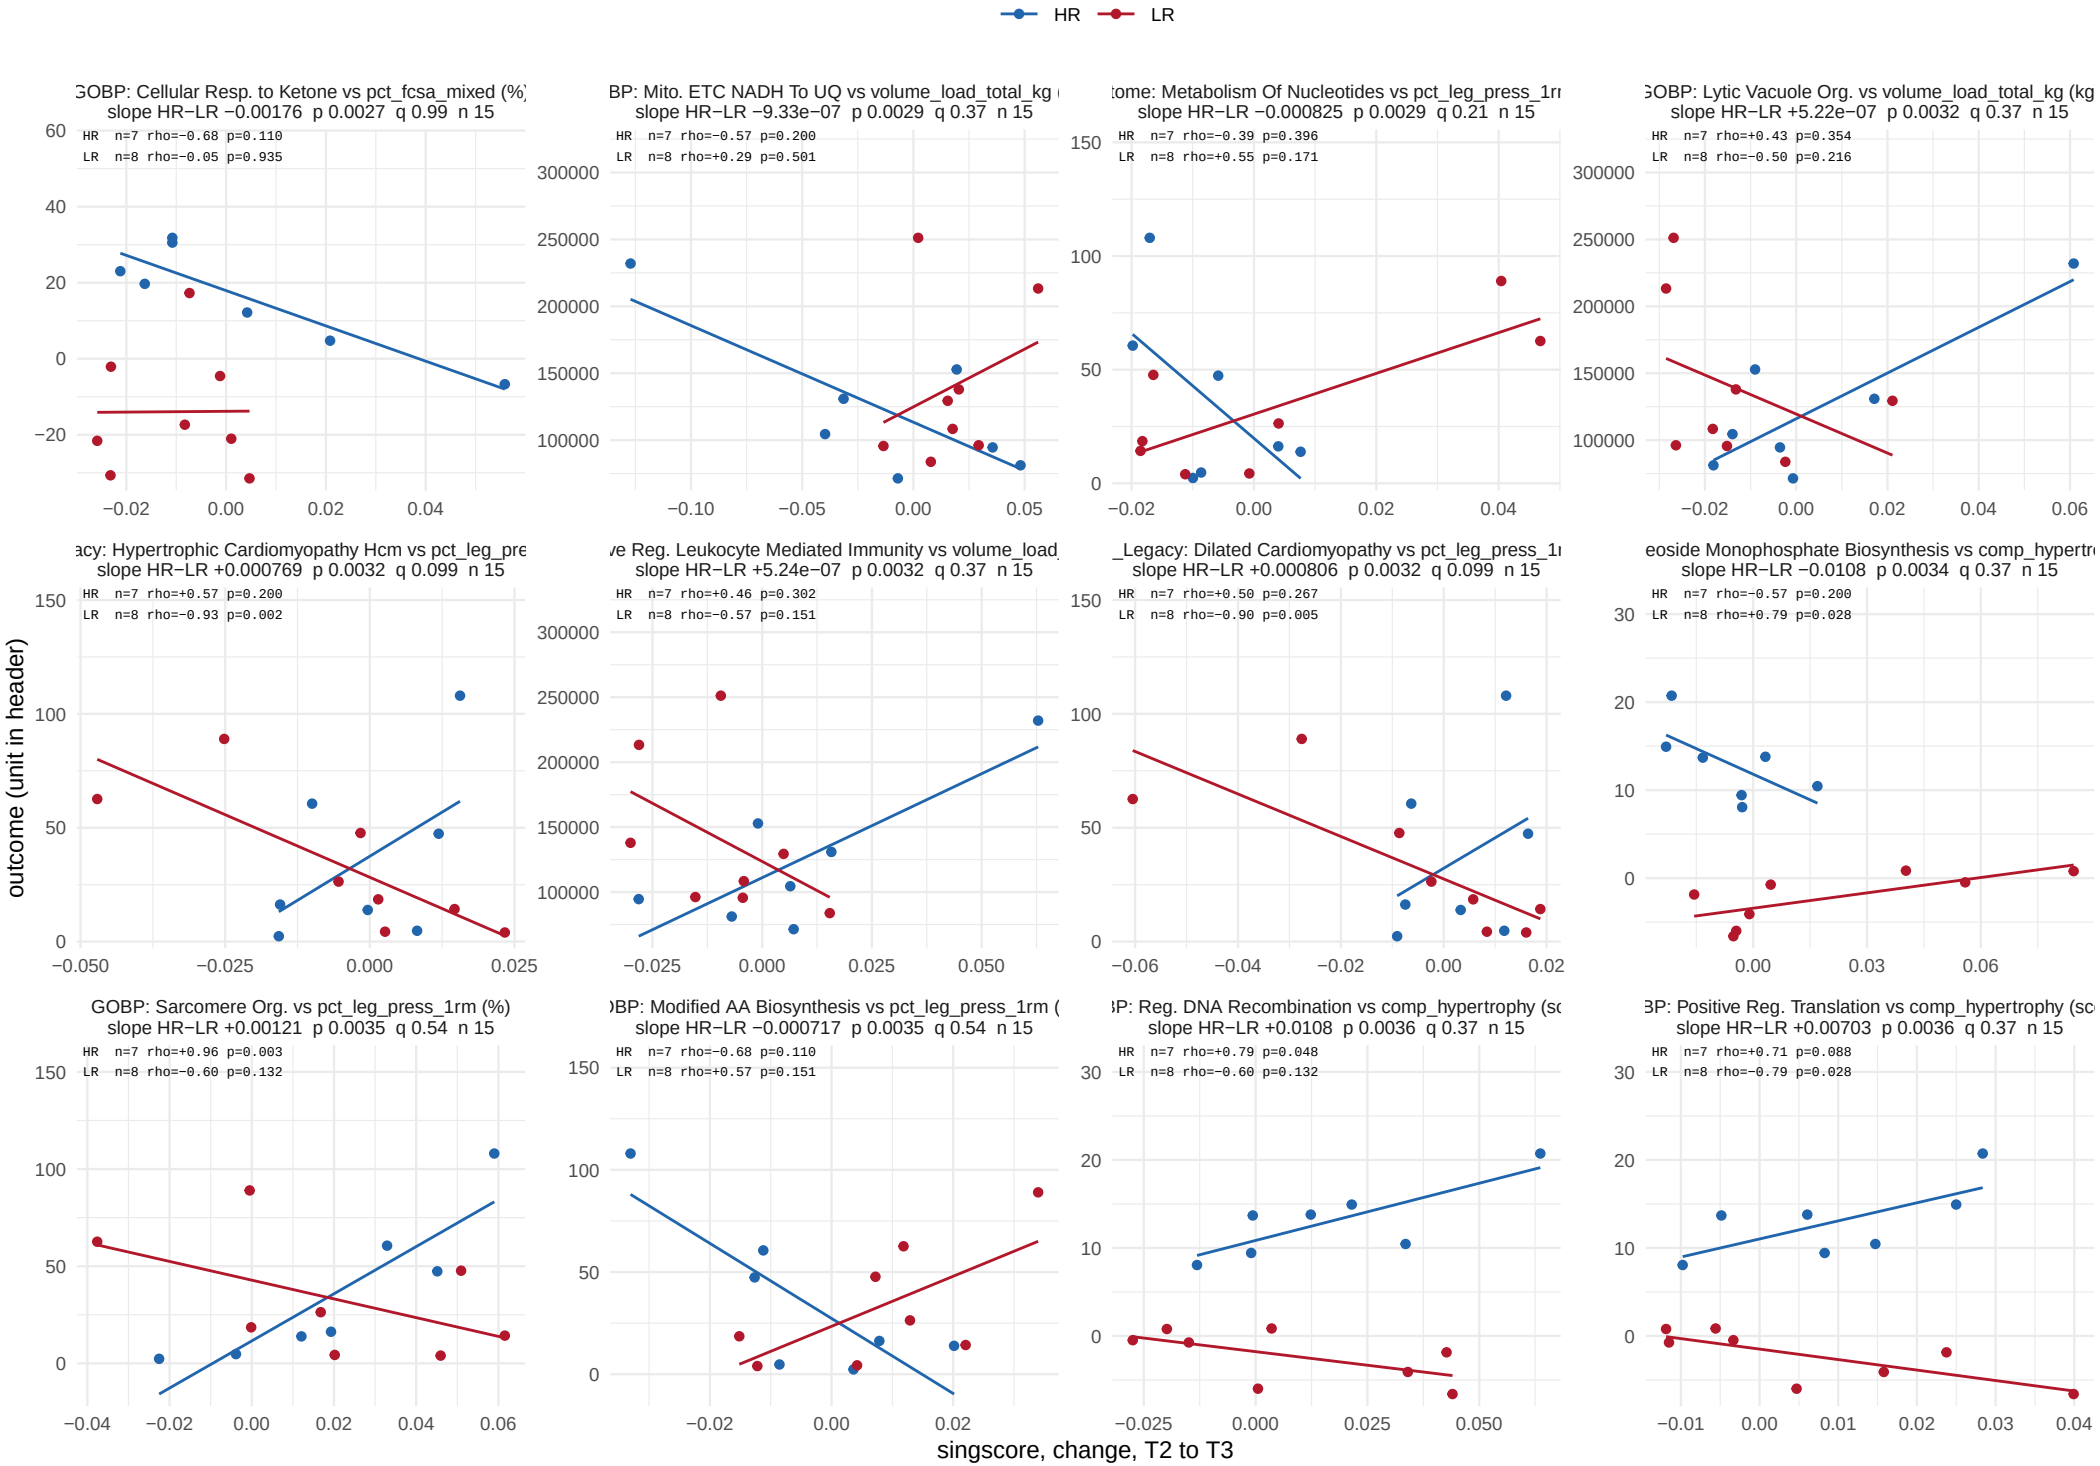


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, acute window


643 of 11024 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 3 of 54.

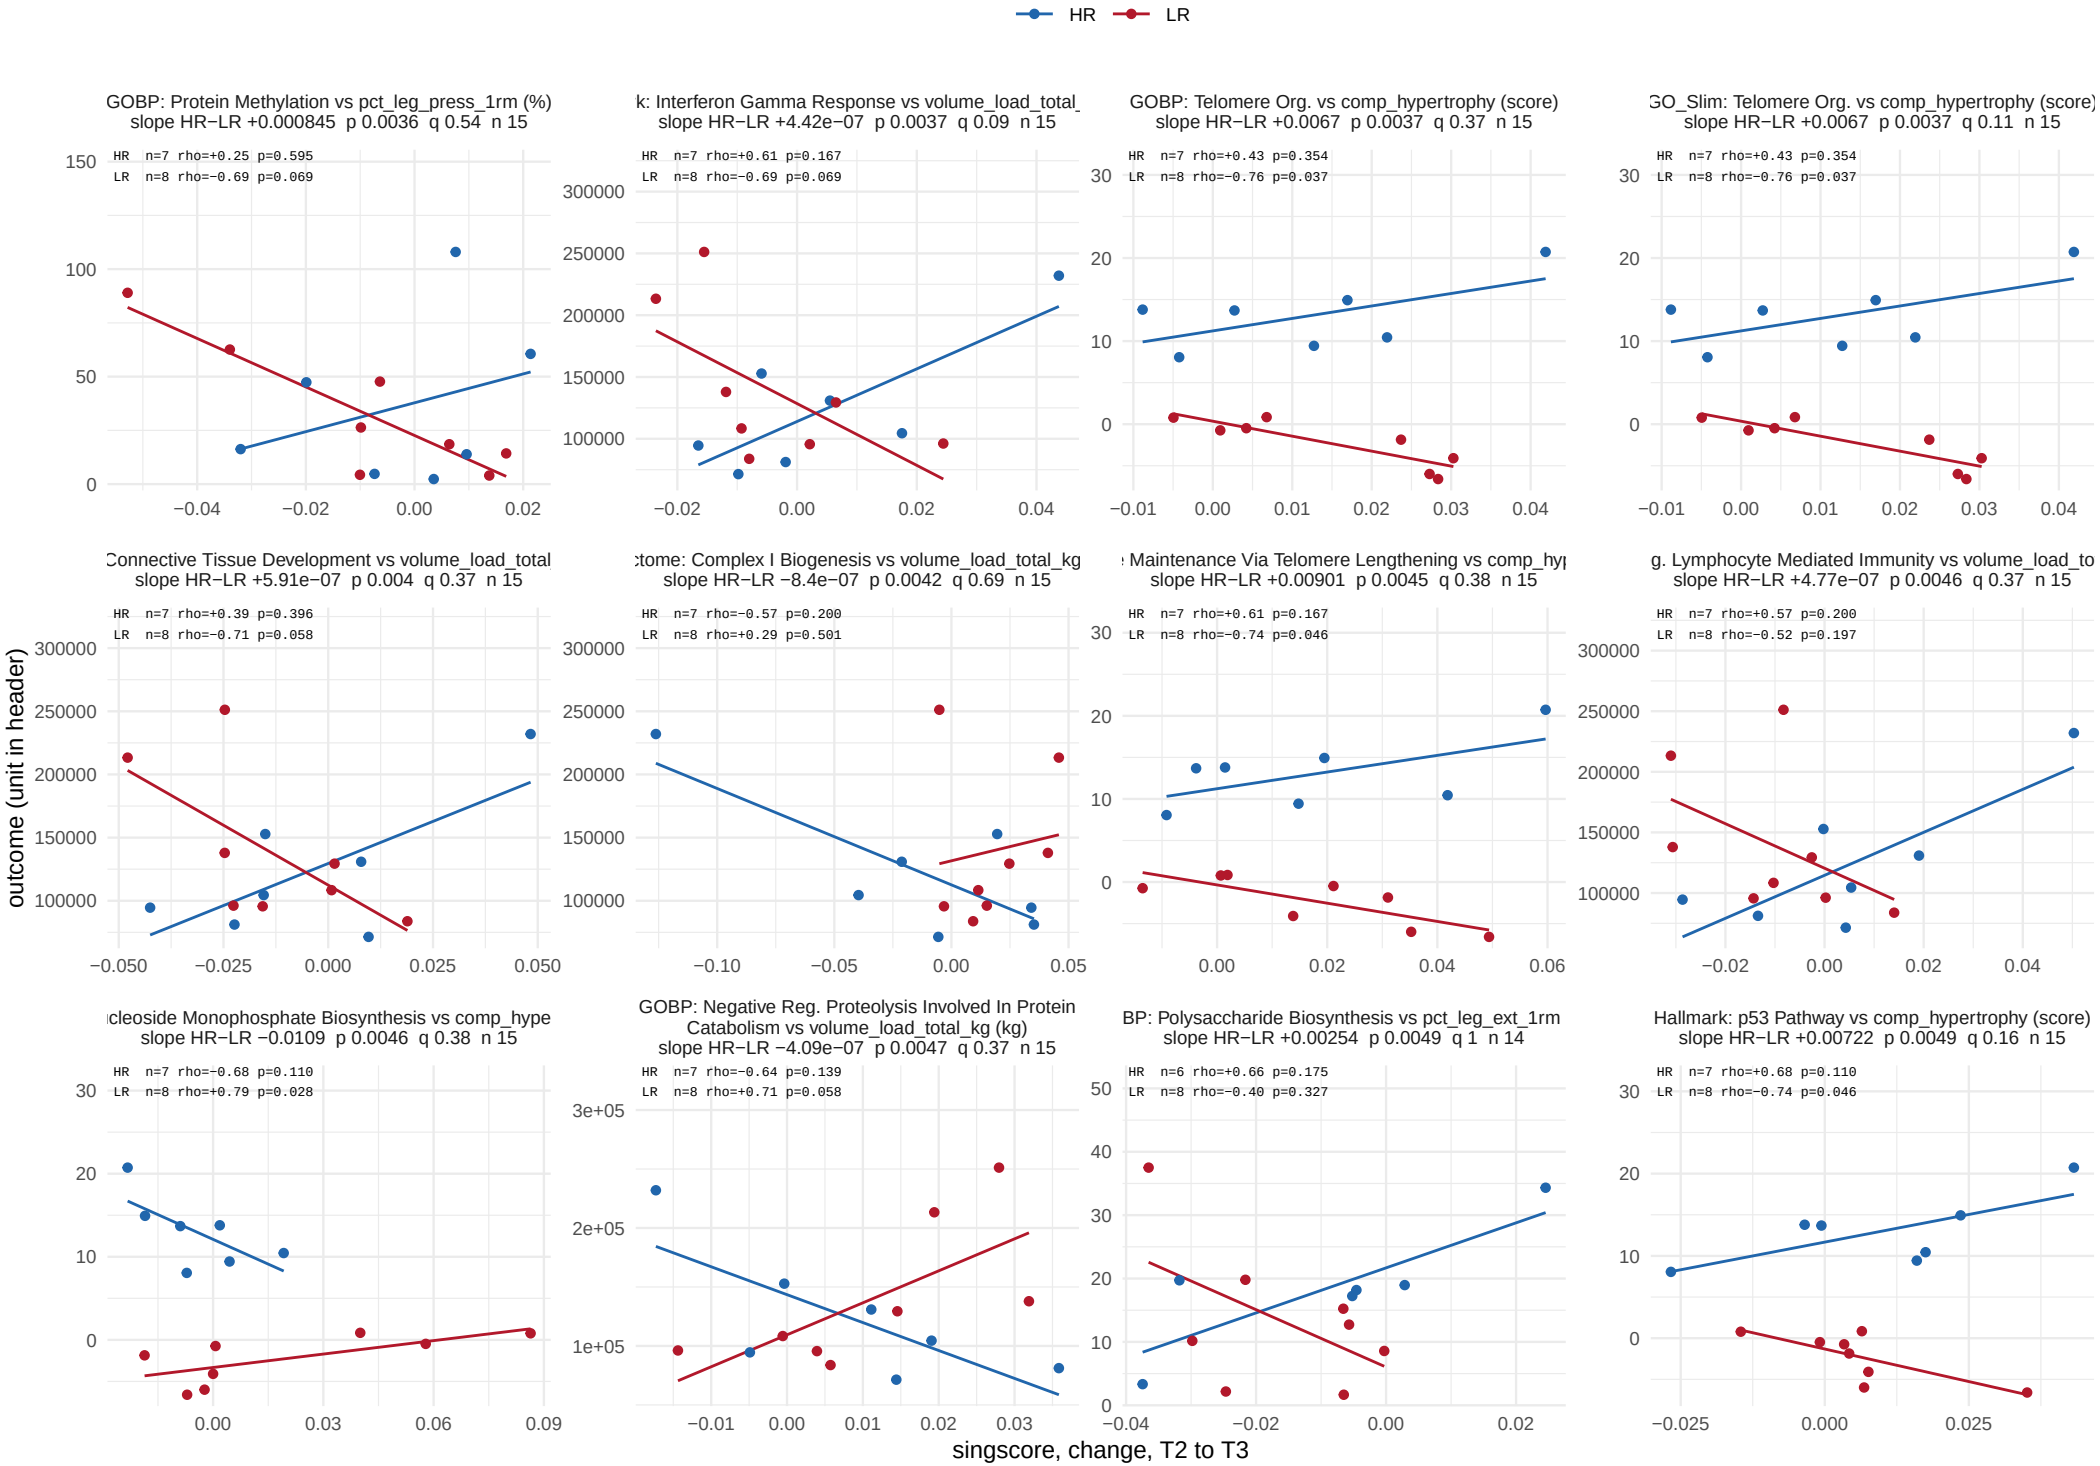


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, acute window


643 of 11024 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 4 of 54.

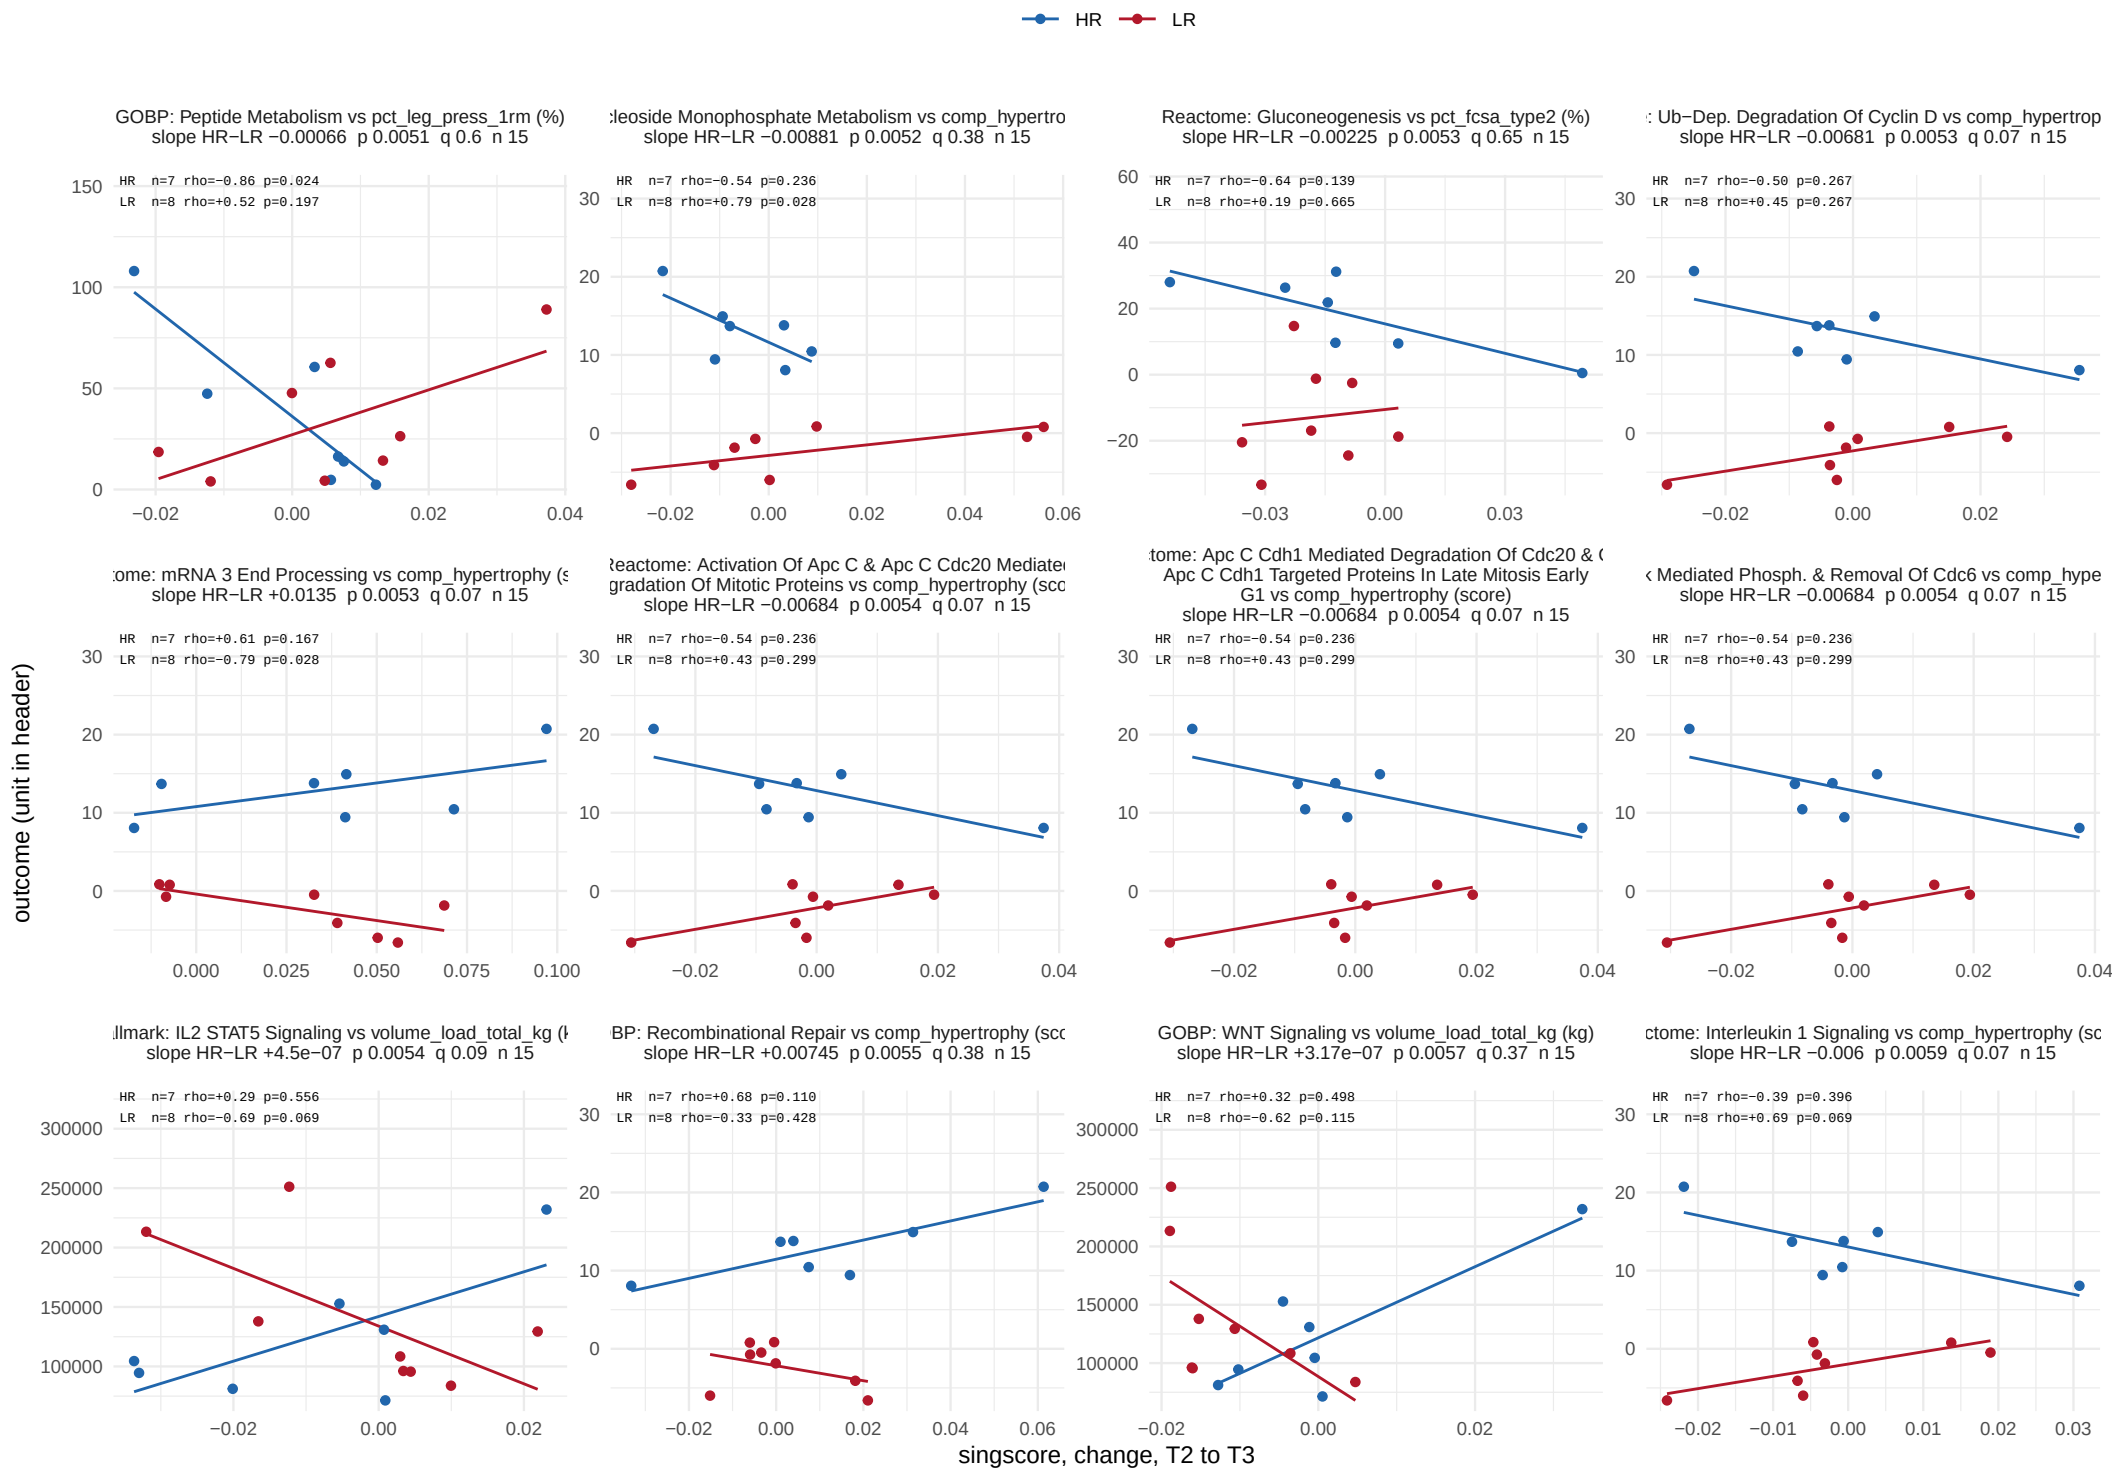


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

# Arm difference, acute window


643 of 11024 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 5 of 54.

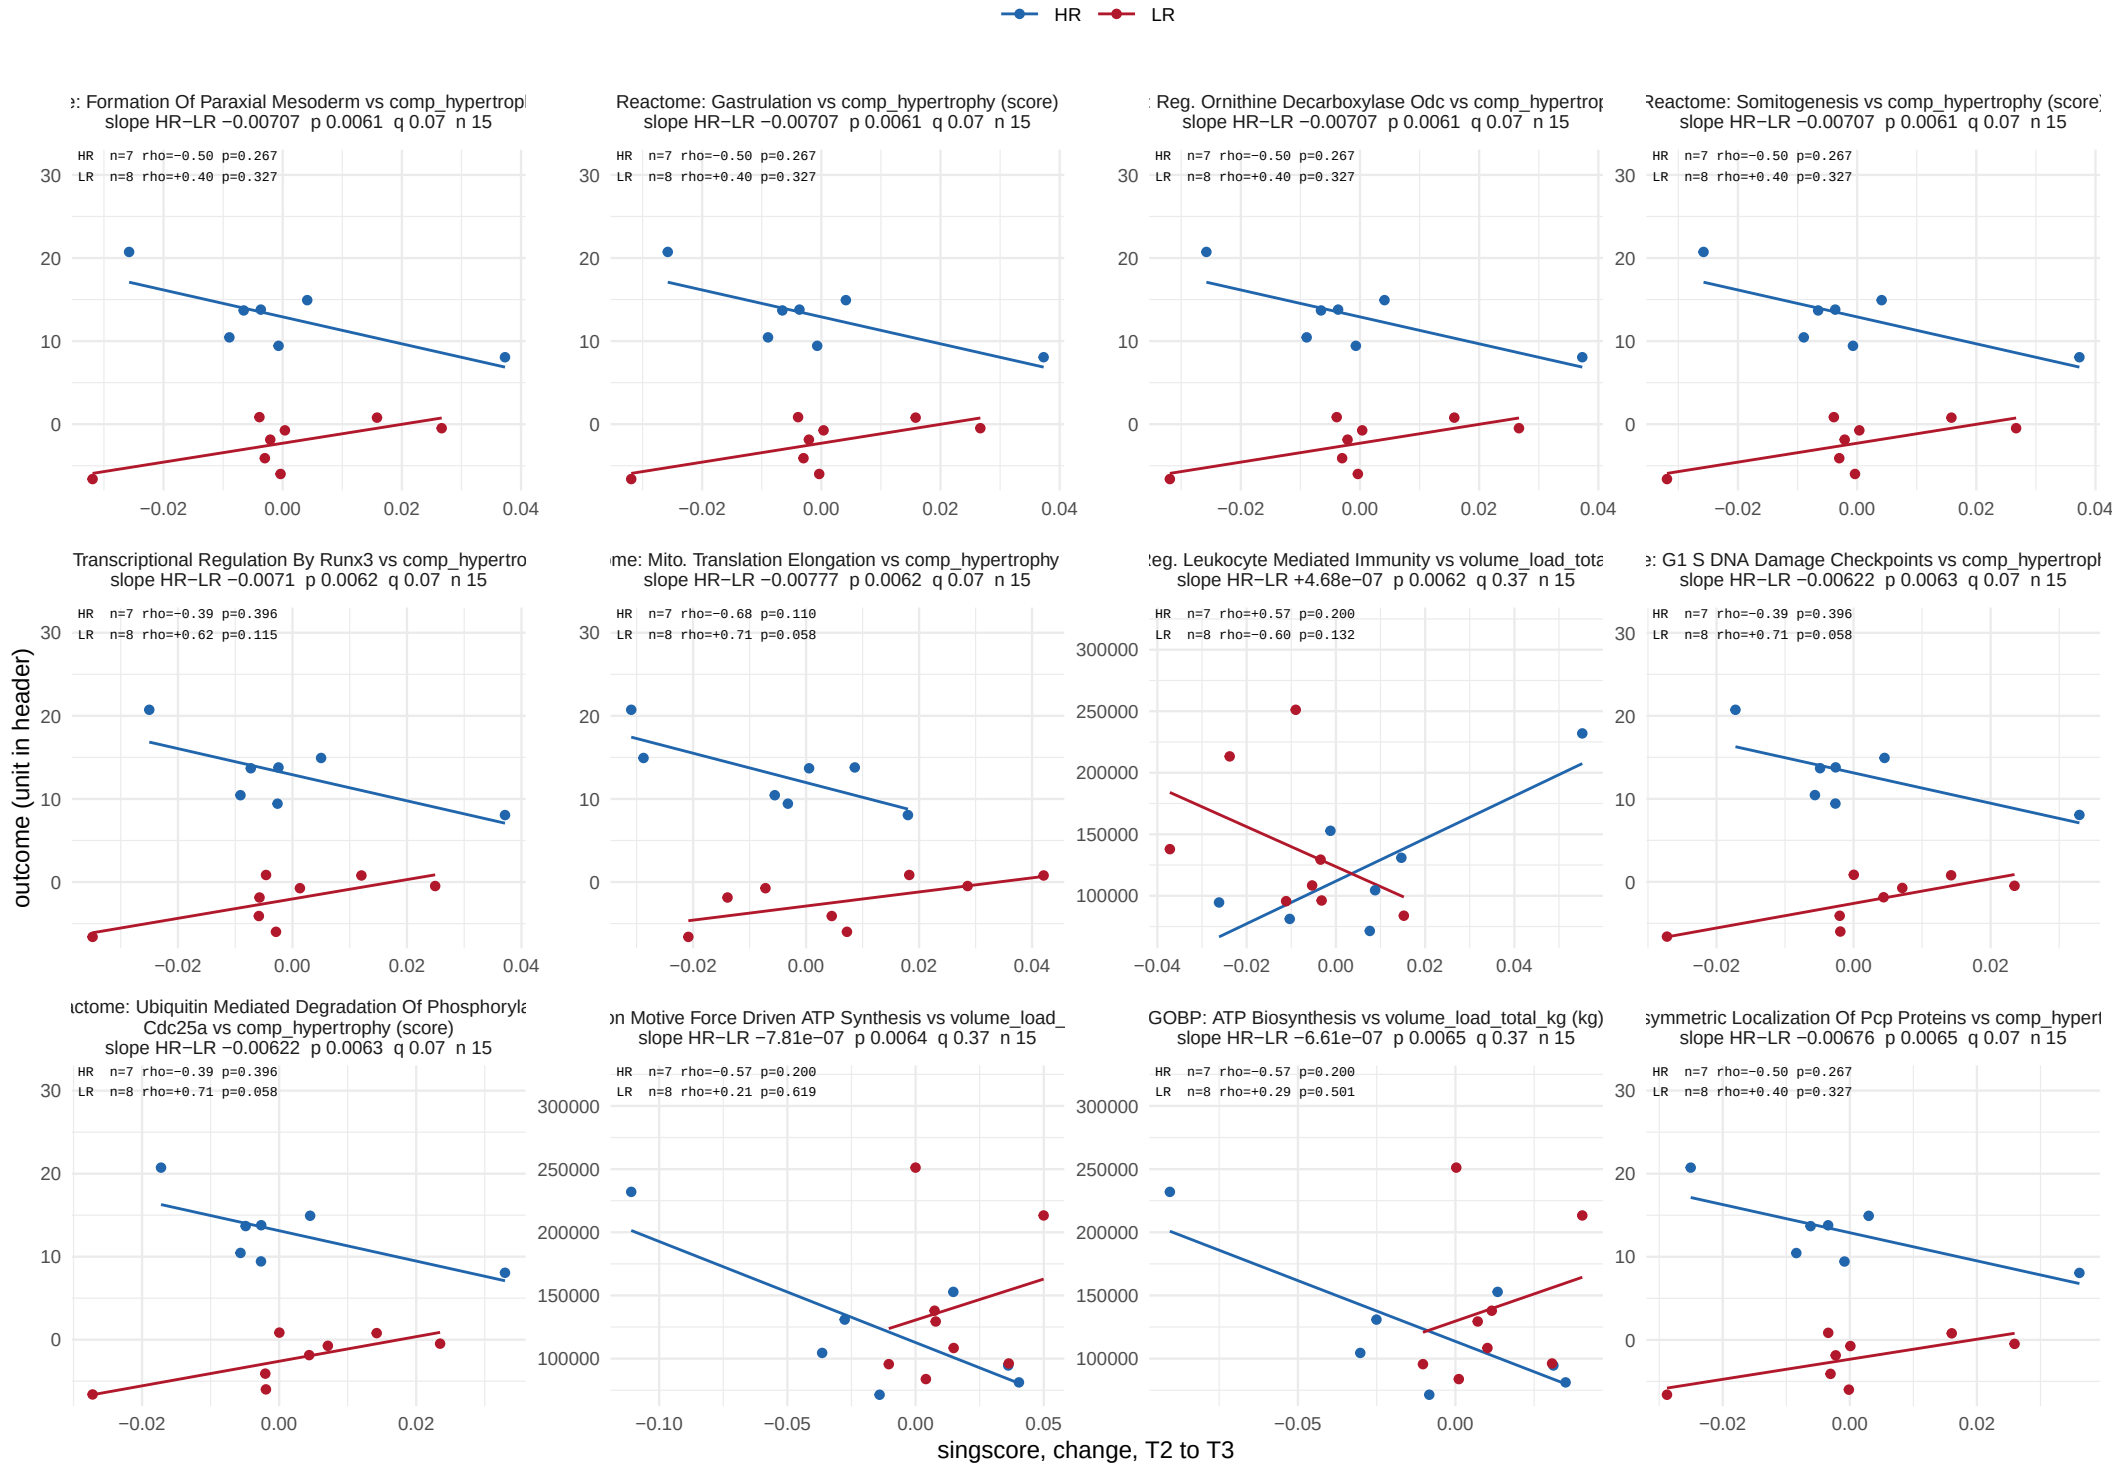


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, acute window


643 of 11024 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 6 of 54.

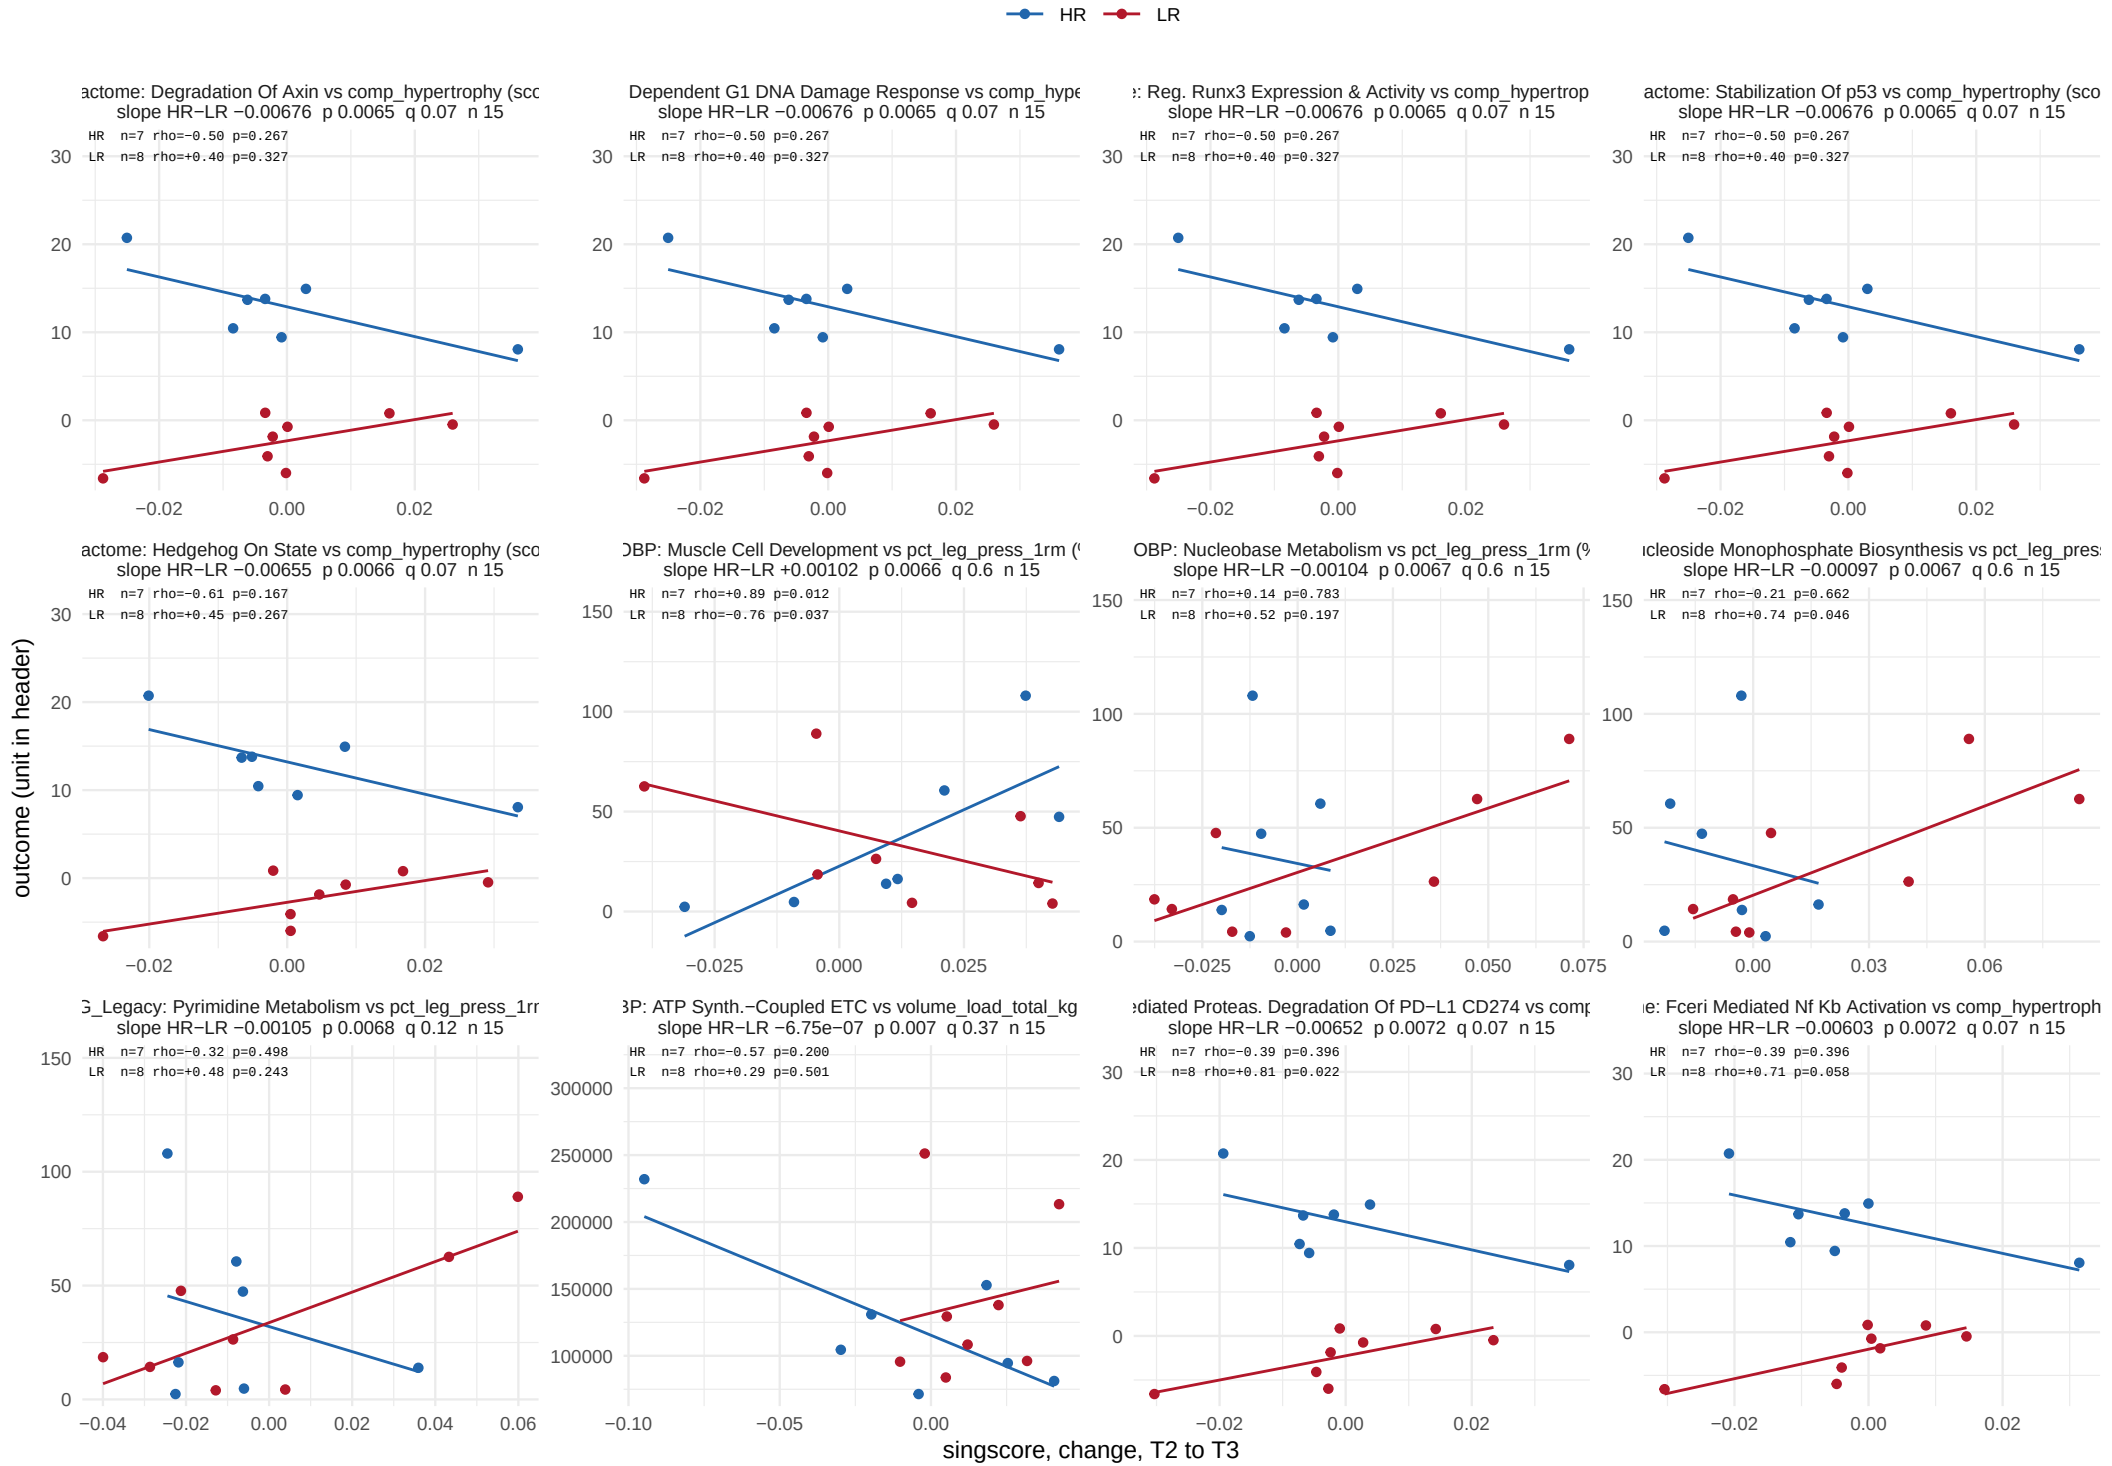


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, acute window


643 of 11024 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 7 of 54.

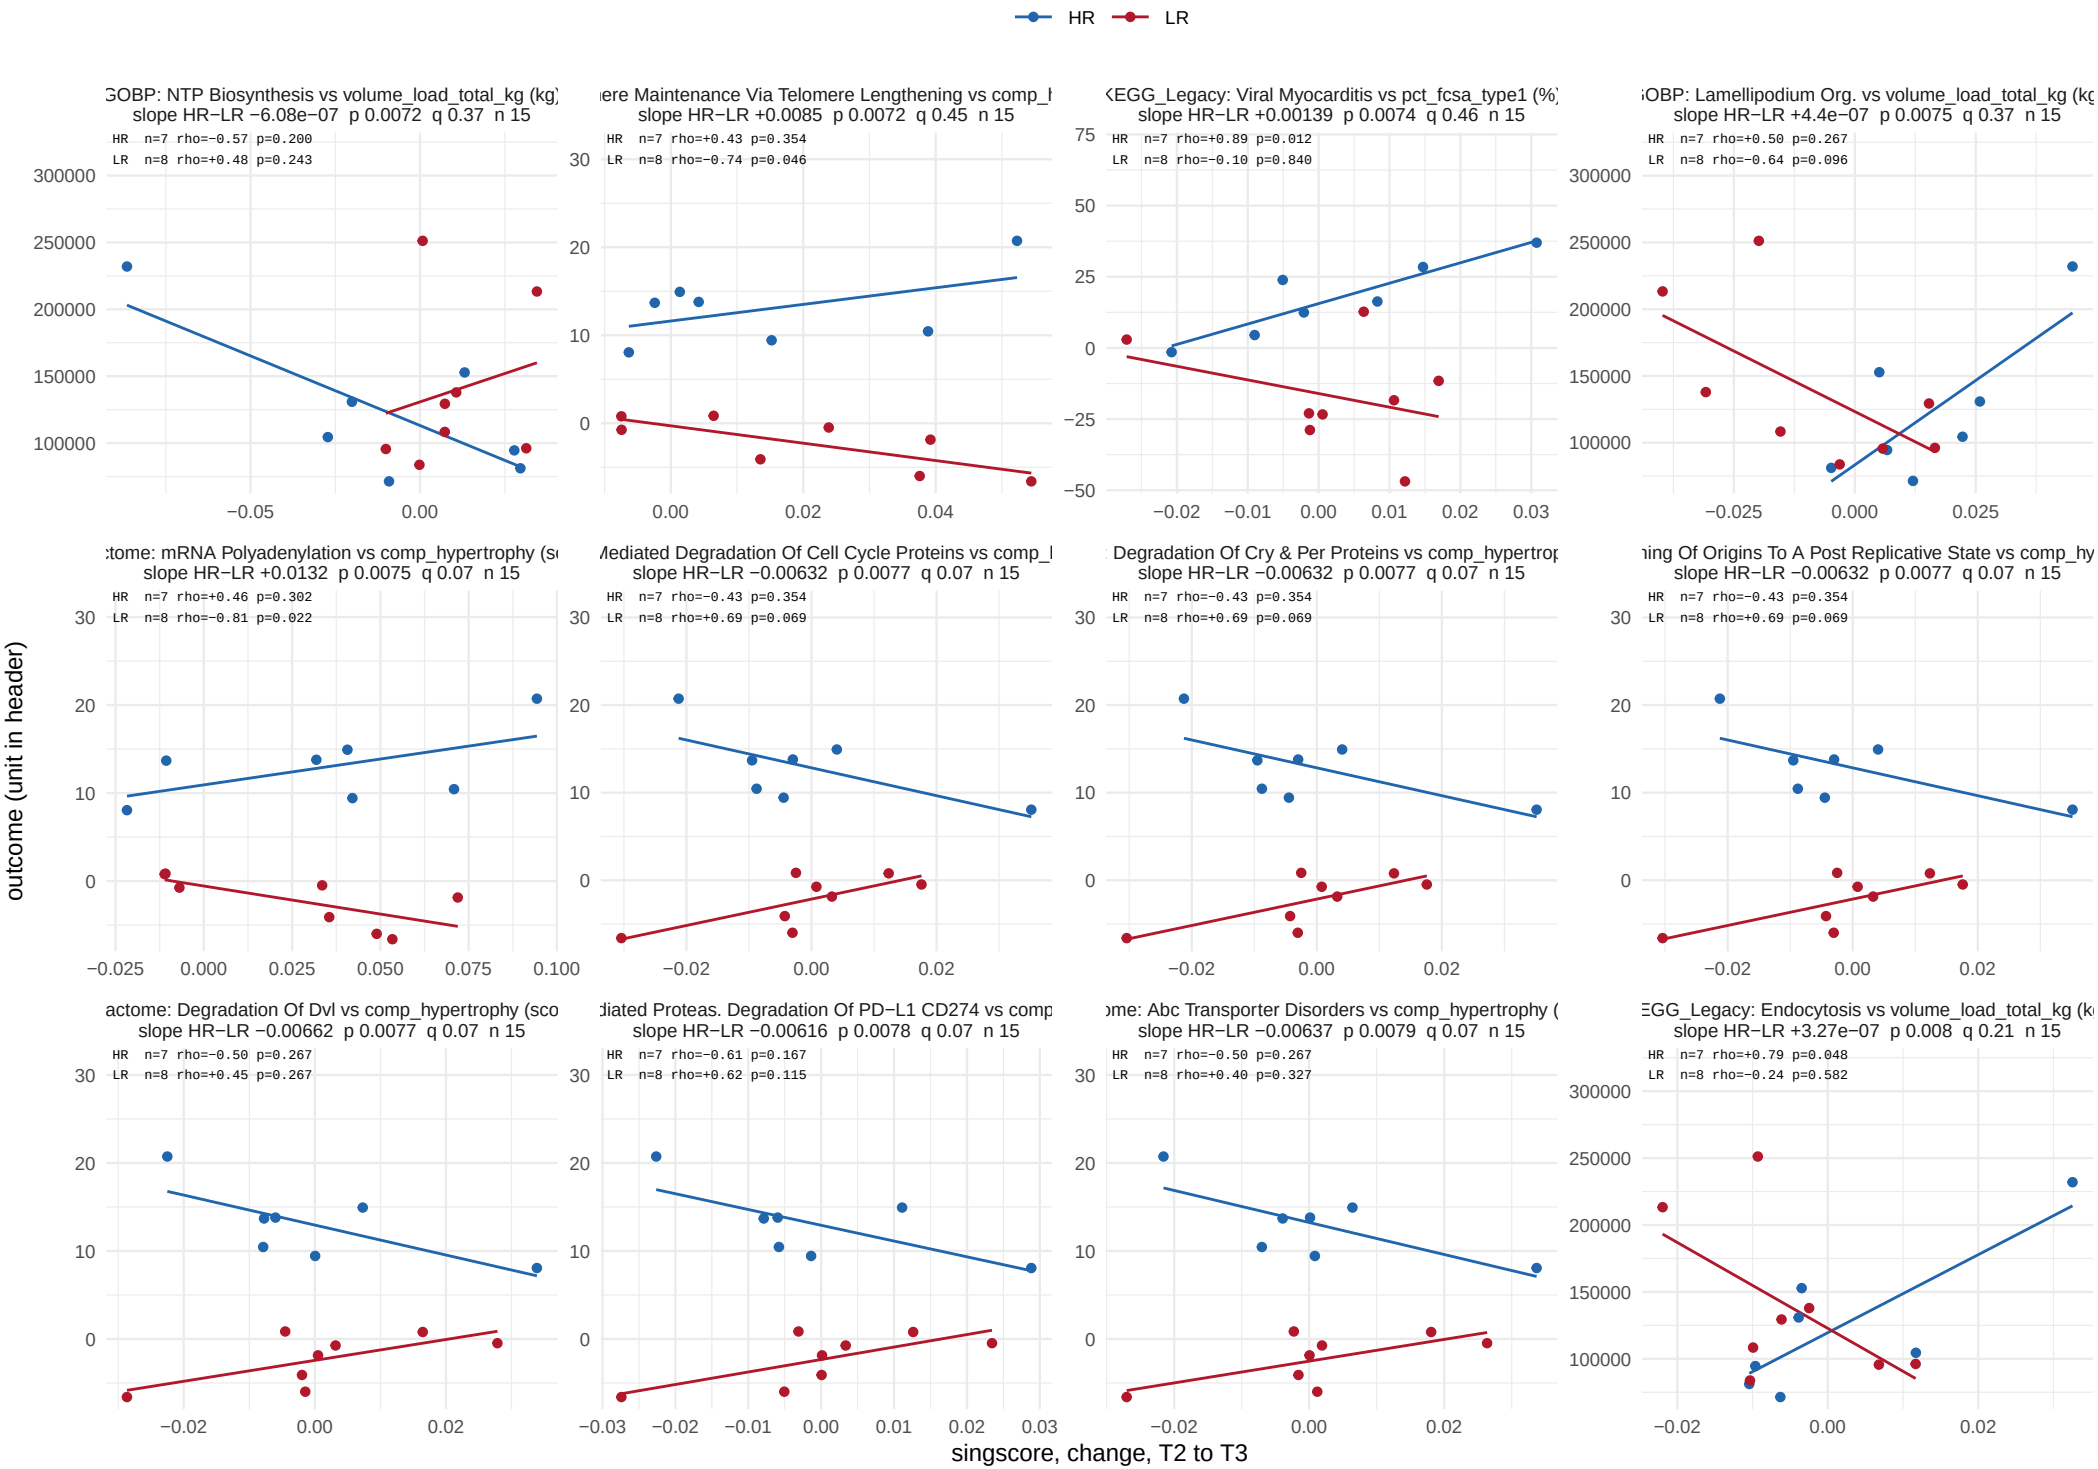


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, acute window


643 of 11024 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 8 of 54.

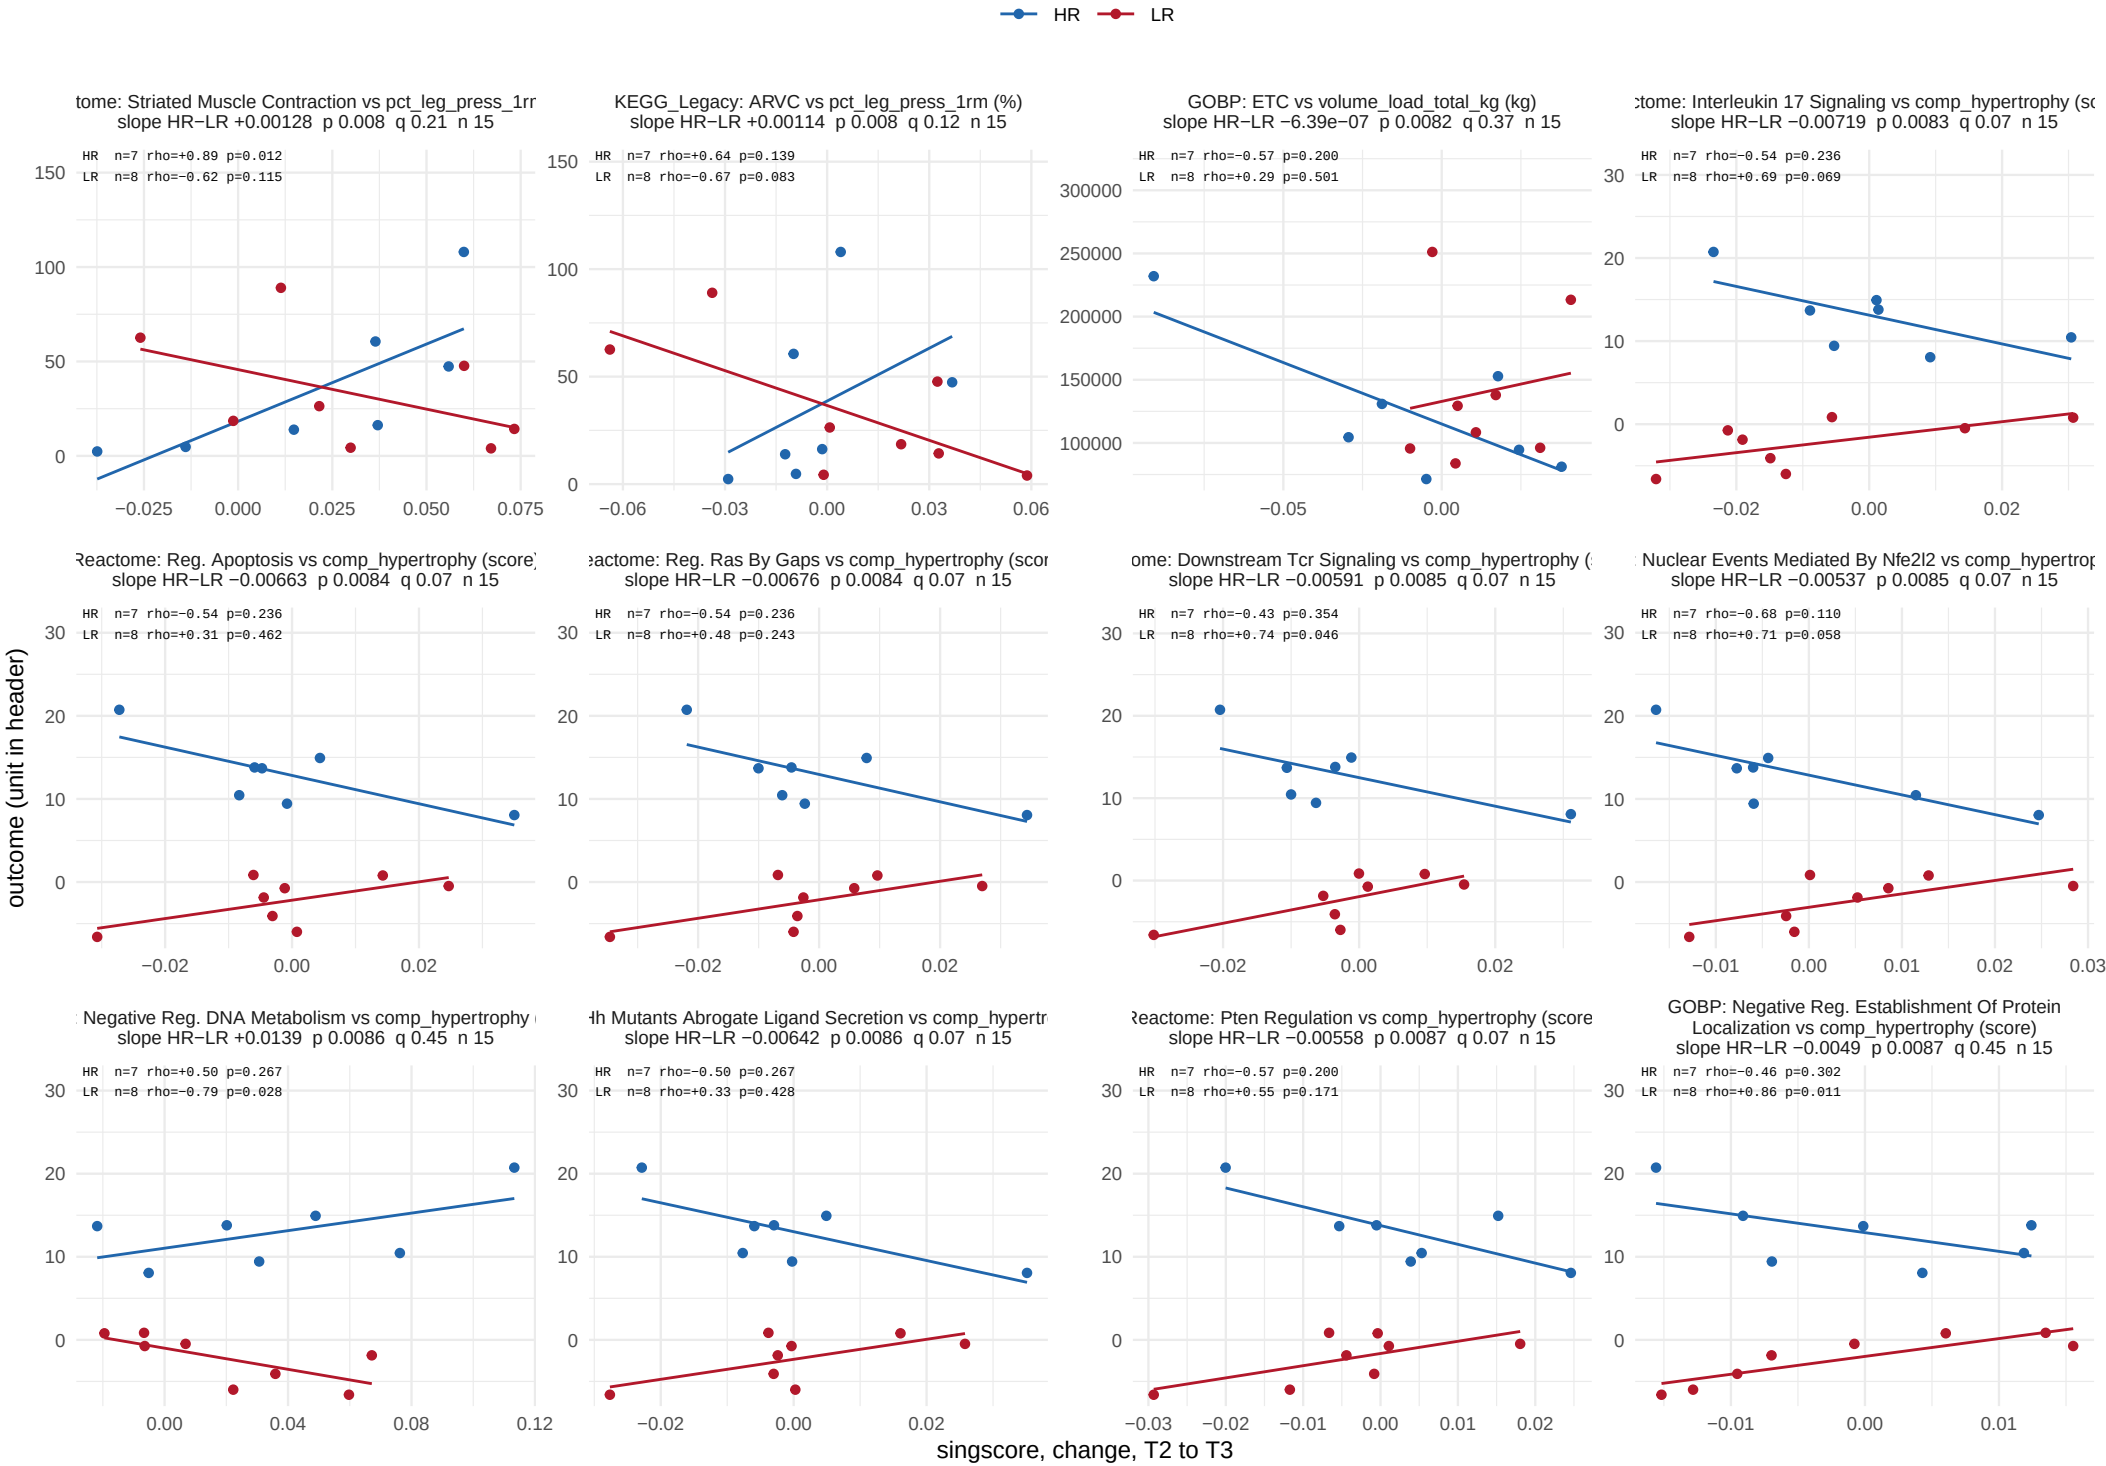


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, acute window


643 of 11024 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 9 of 54.

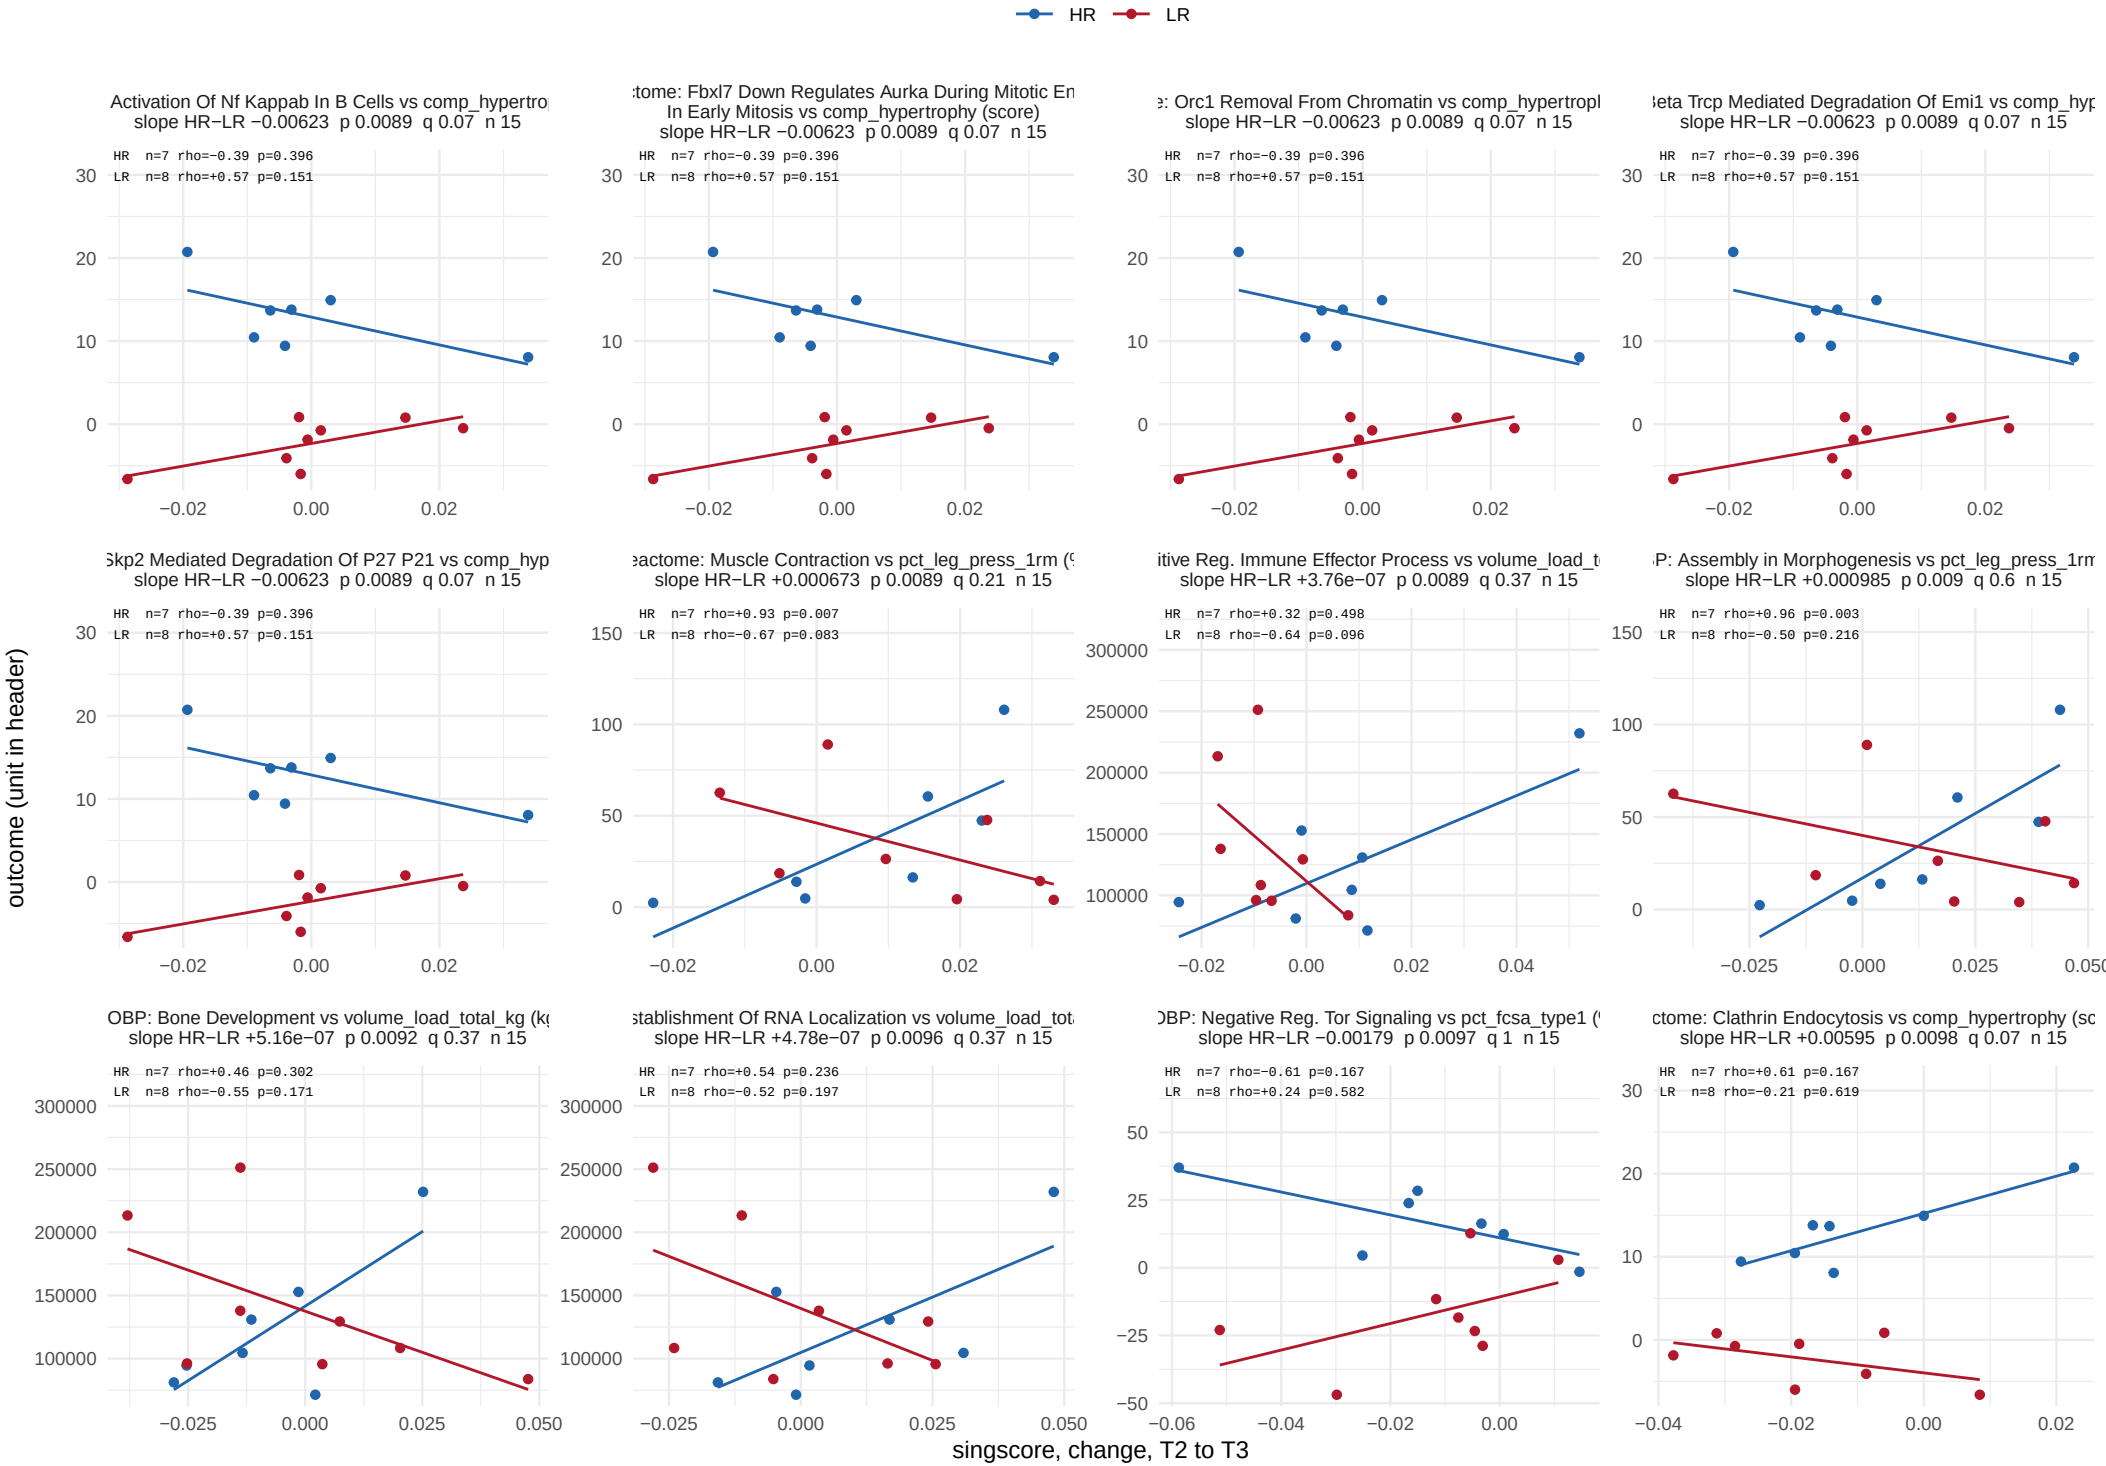


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

# Arm difference, acute window


643 of 11024 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 10 of 54.

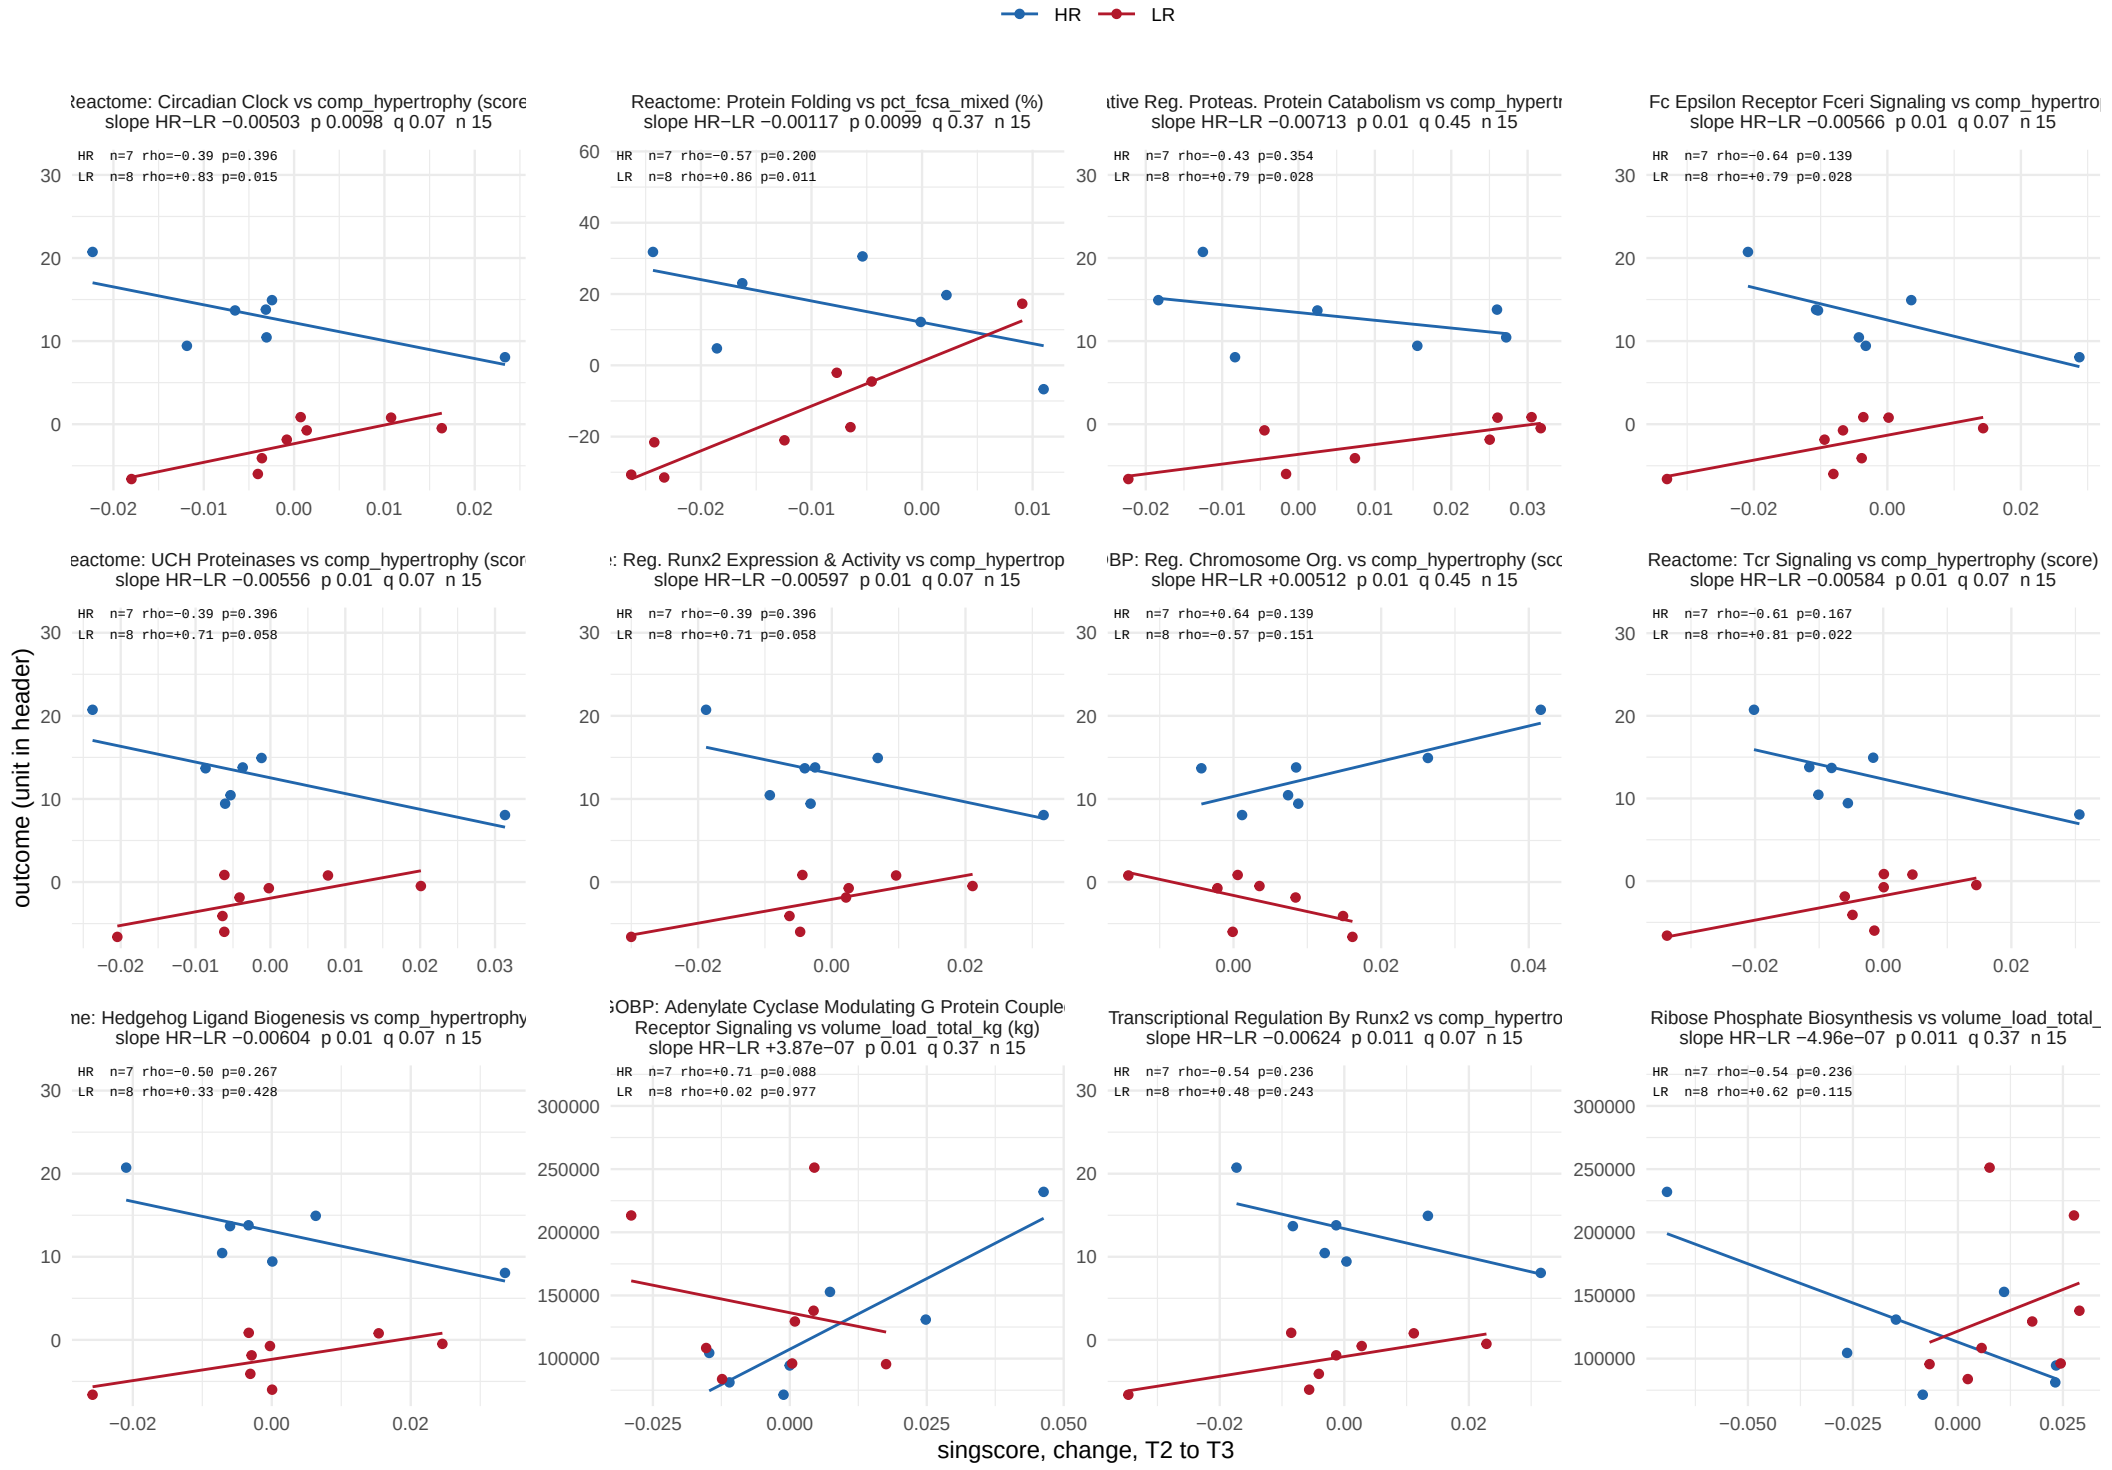


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, acute window


643 of 11024 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 11 of 54.

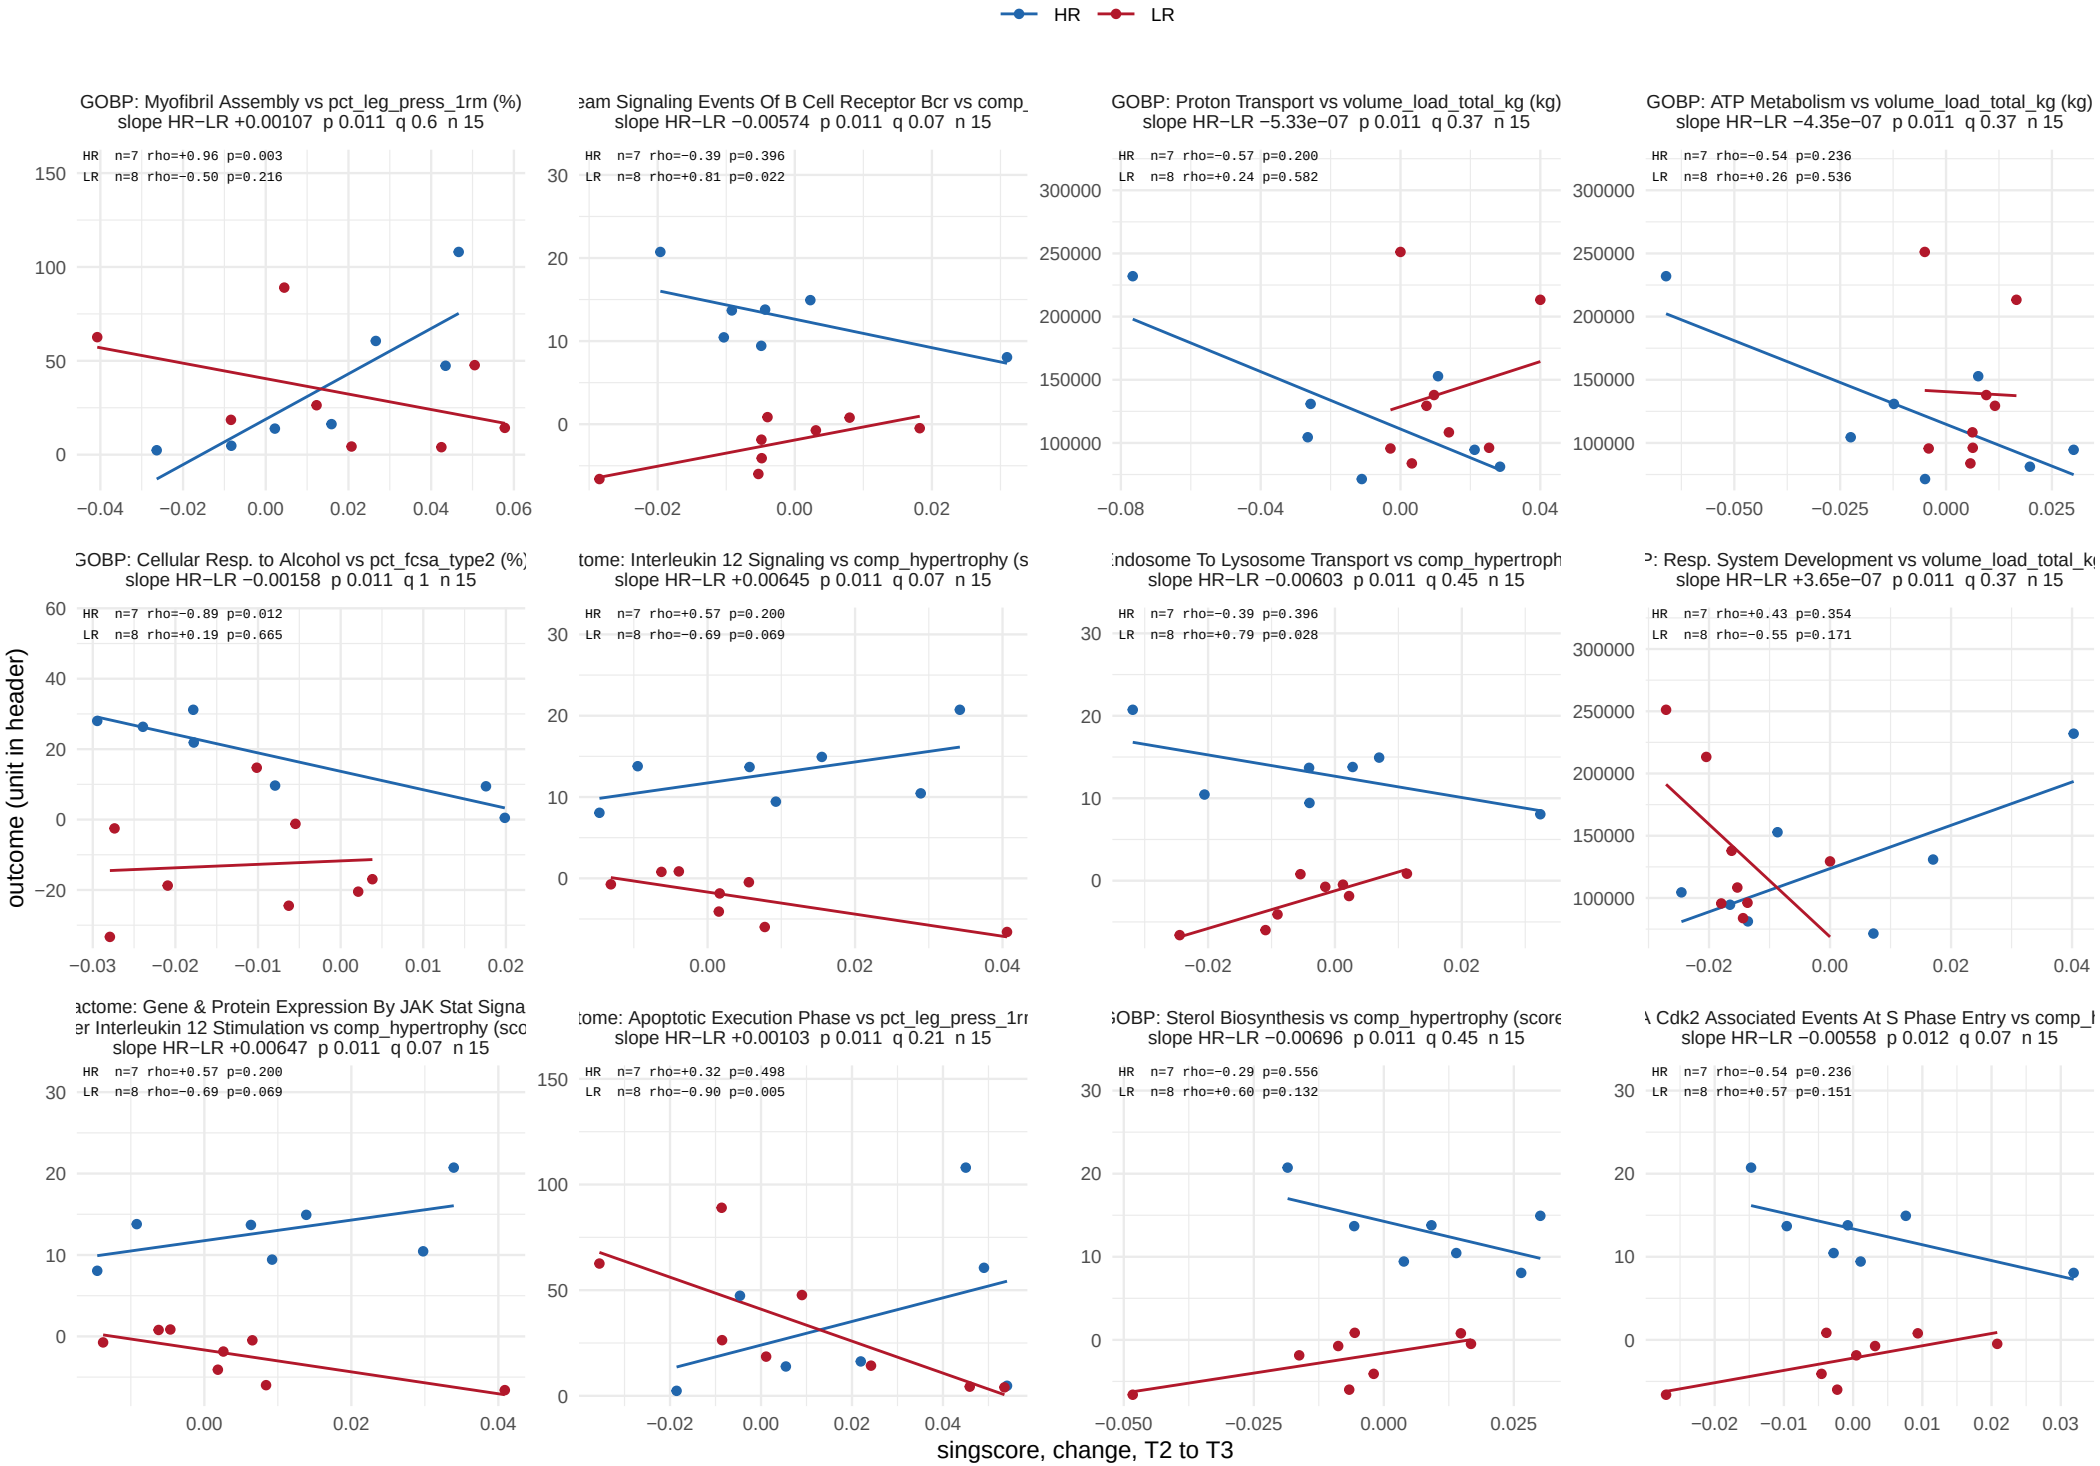


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, acute window


643 of 11024 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 12 of 54.

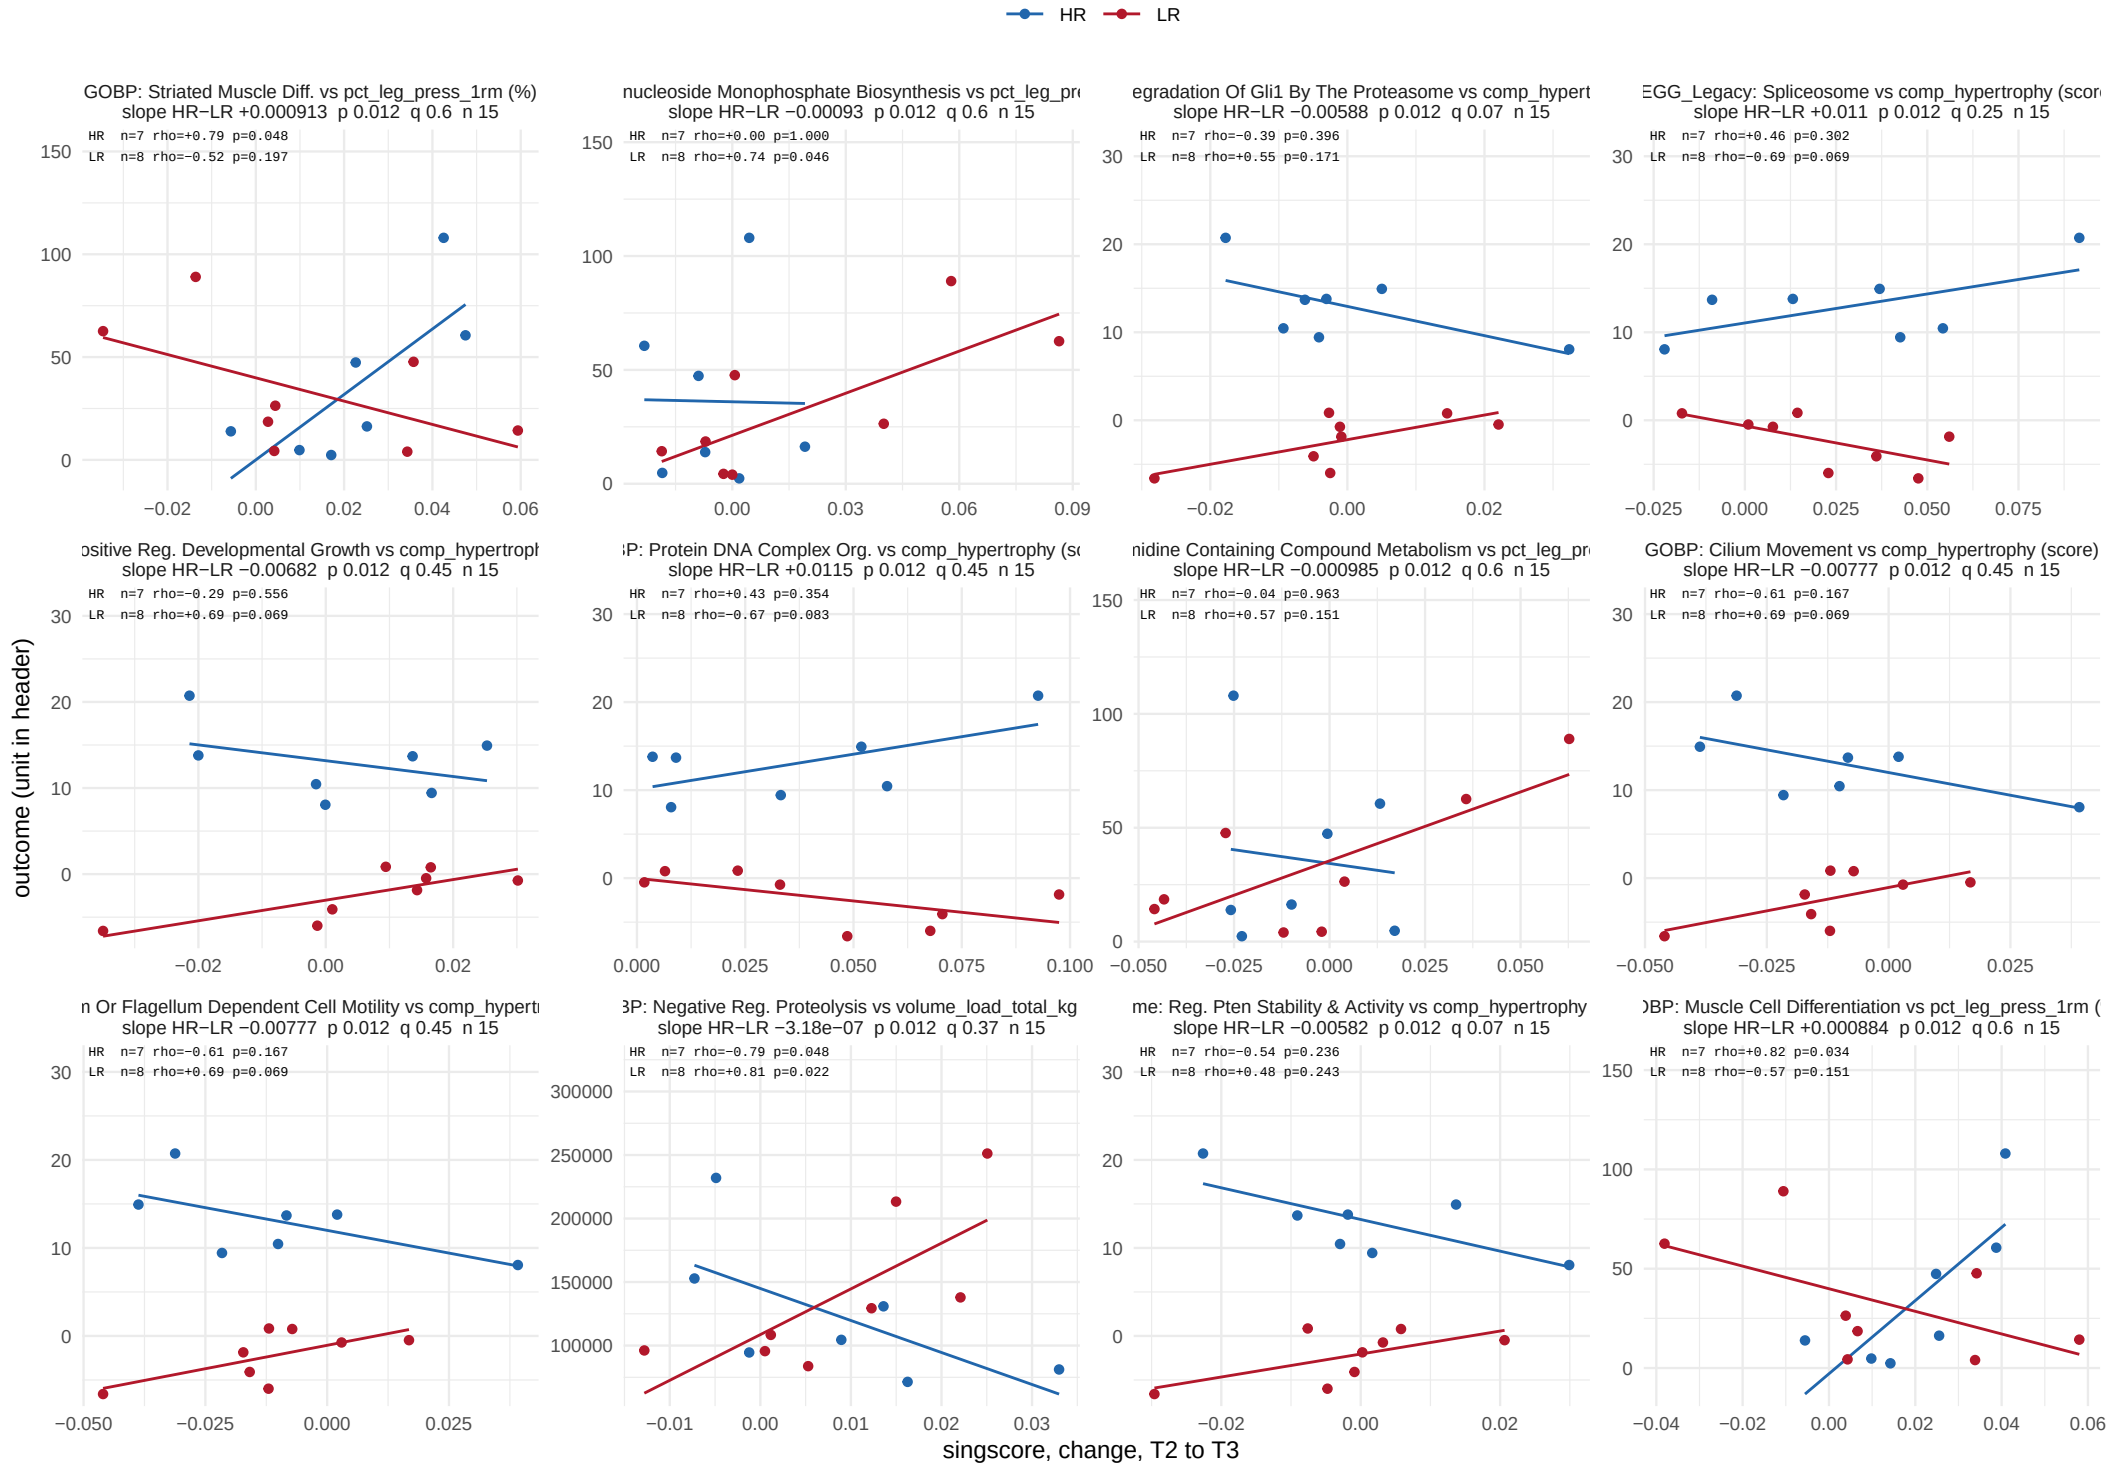


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, acute window


643 of 11024 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 13 of 54.

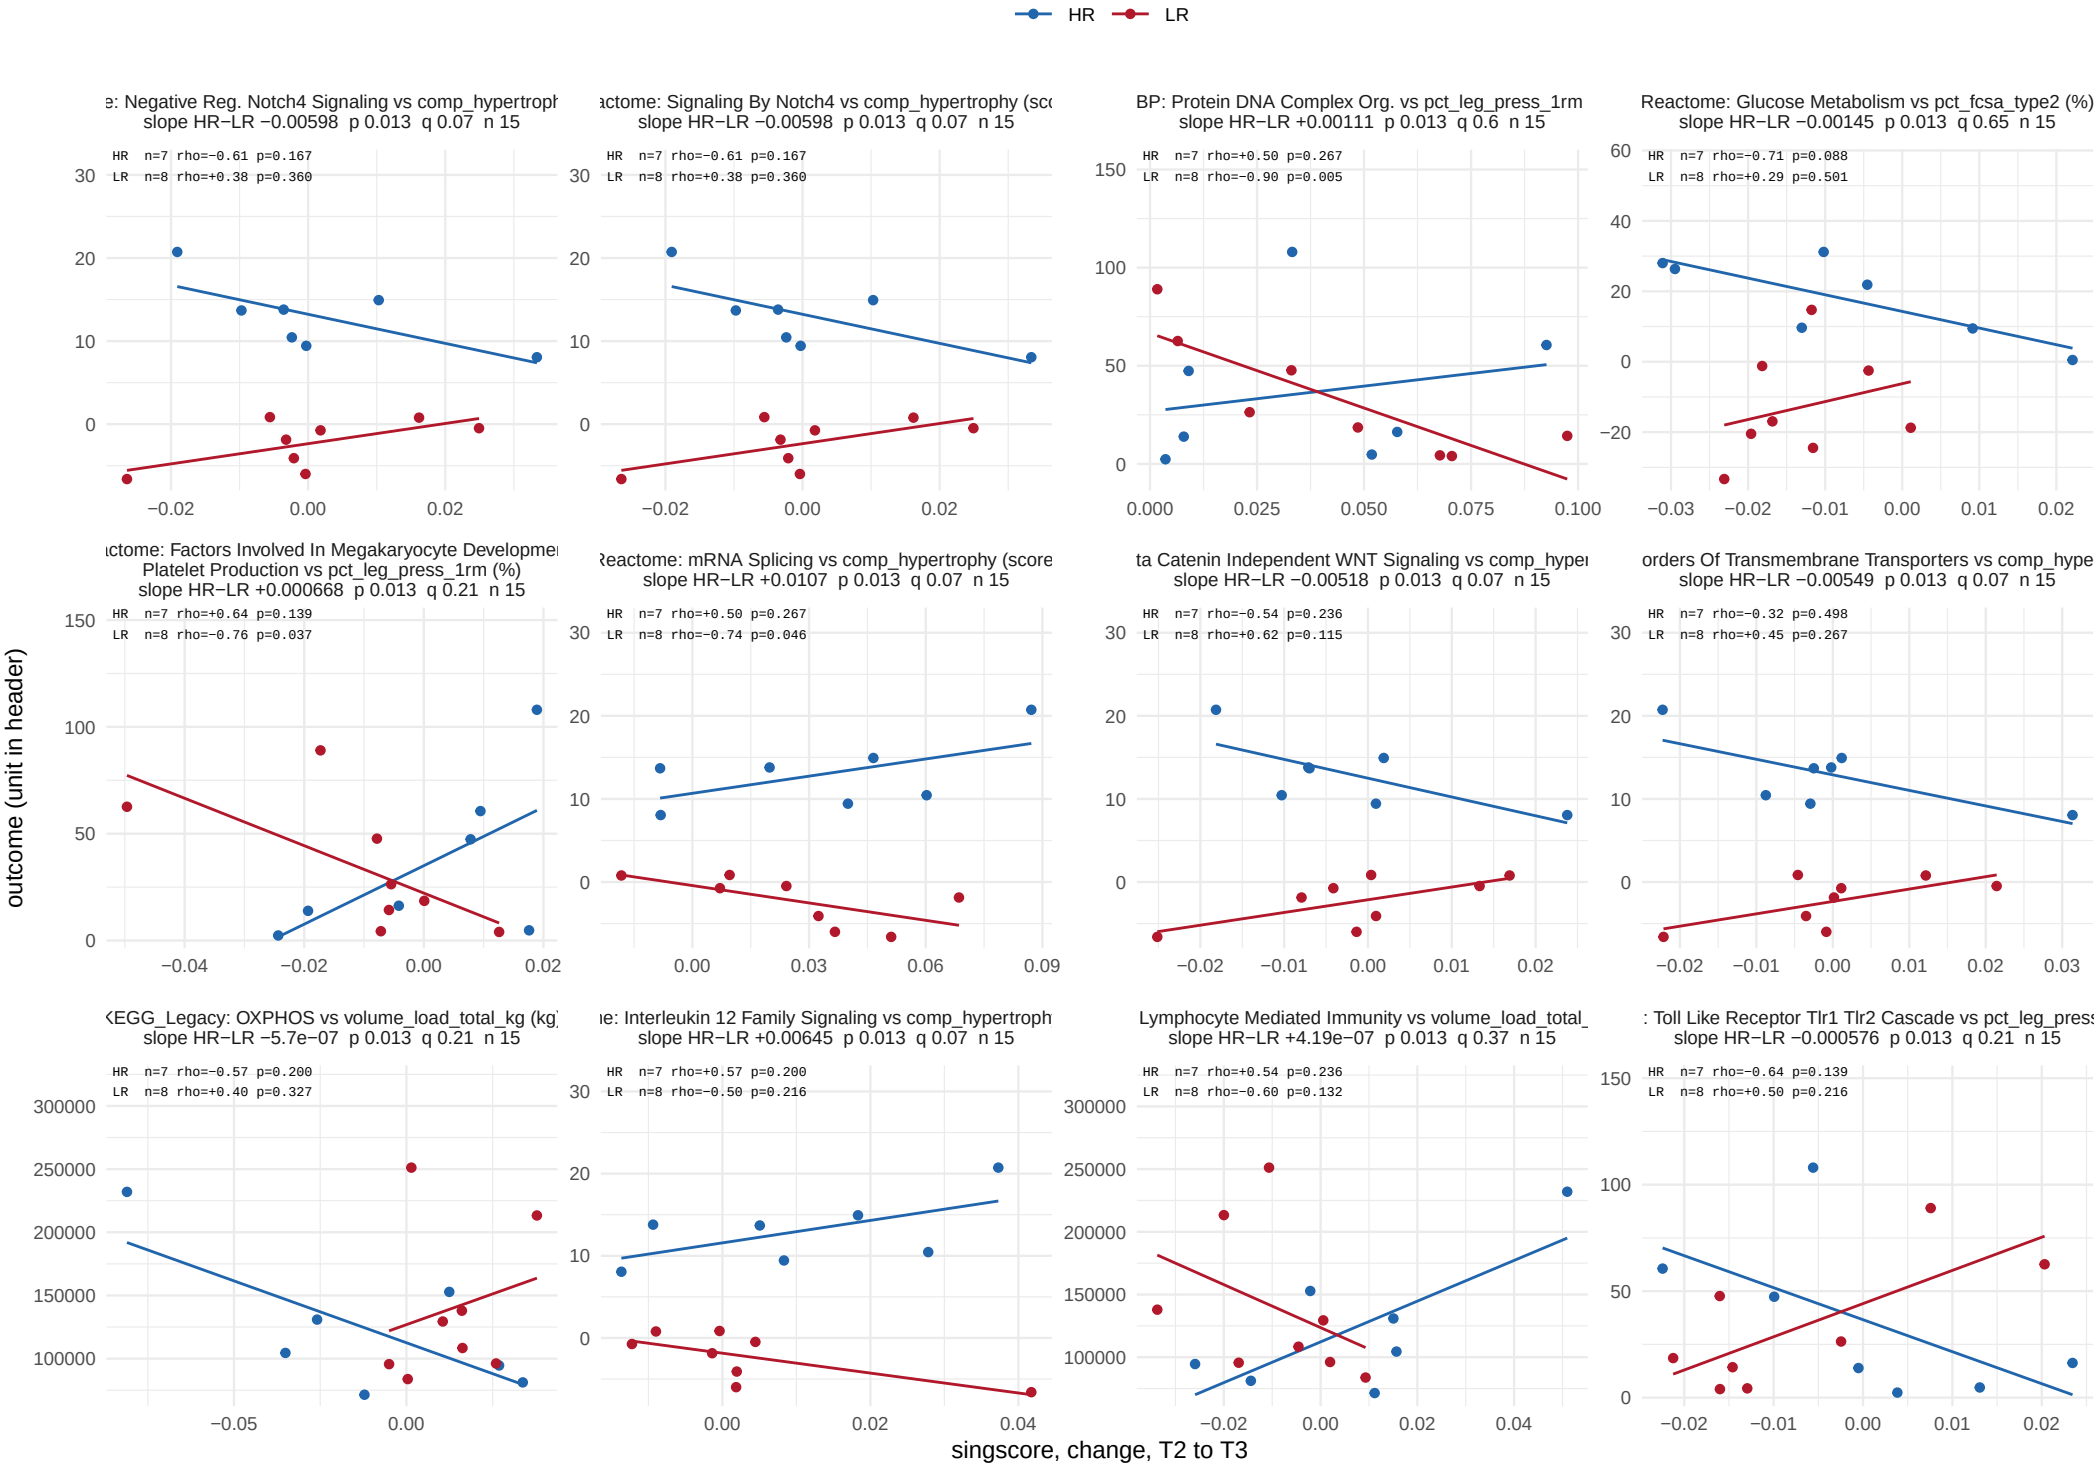


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, acute window


643 of 11024 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 14 of 54.

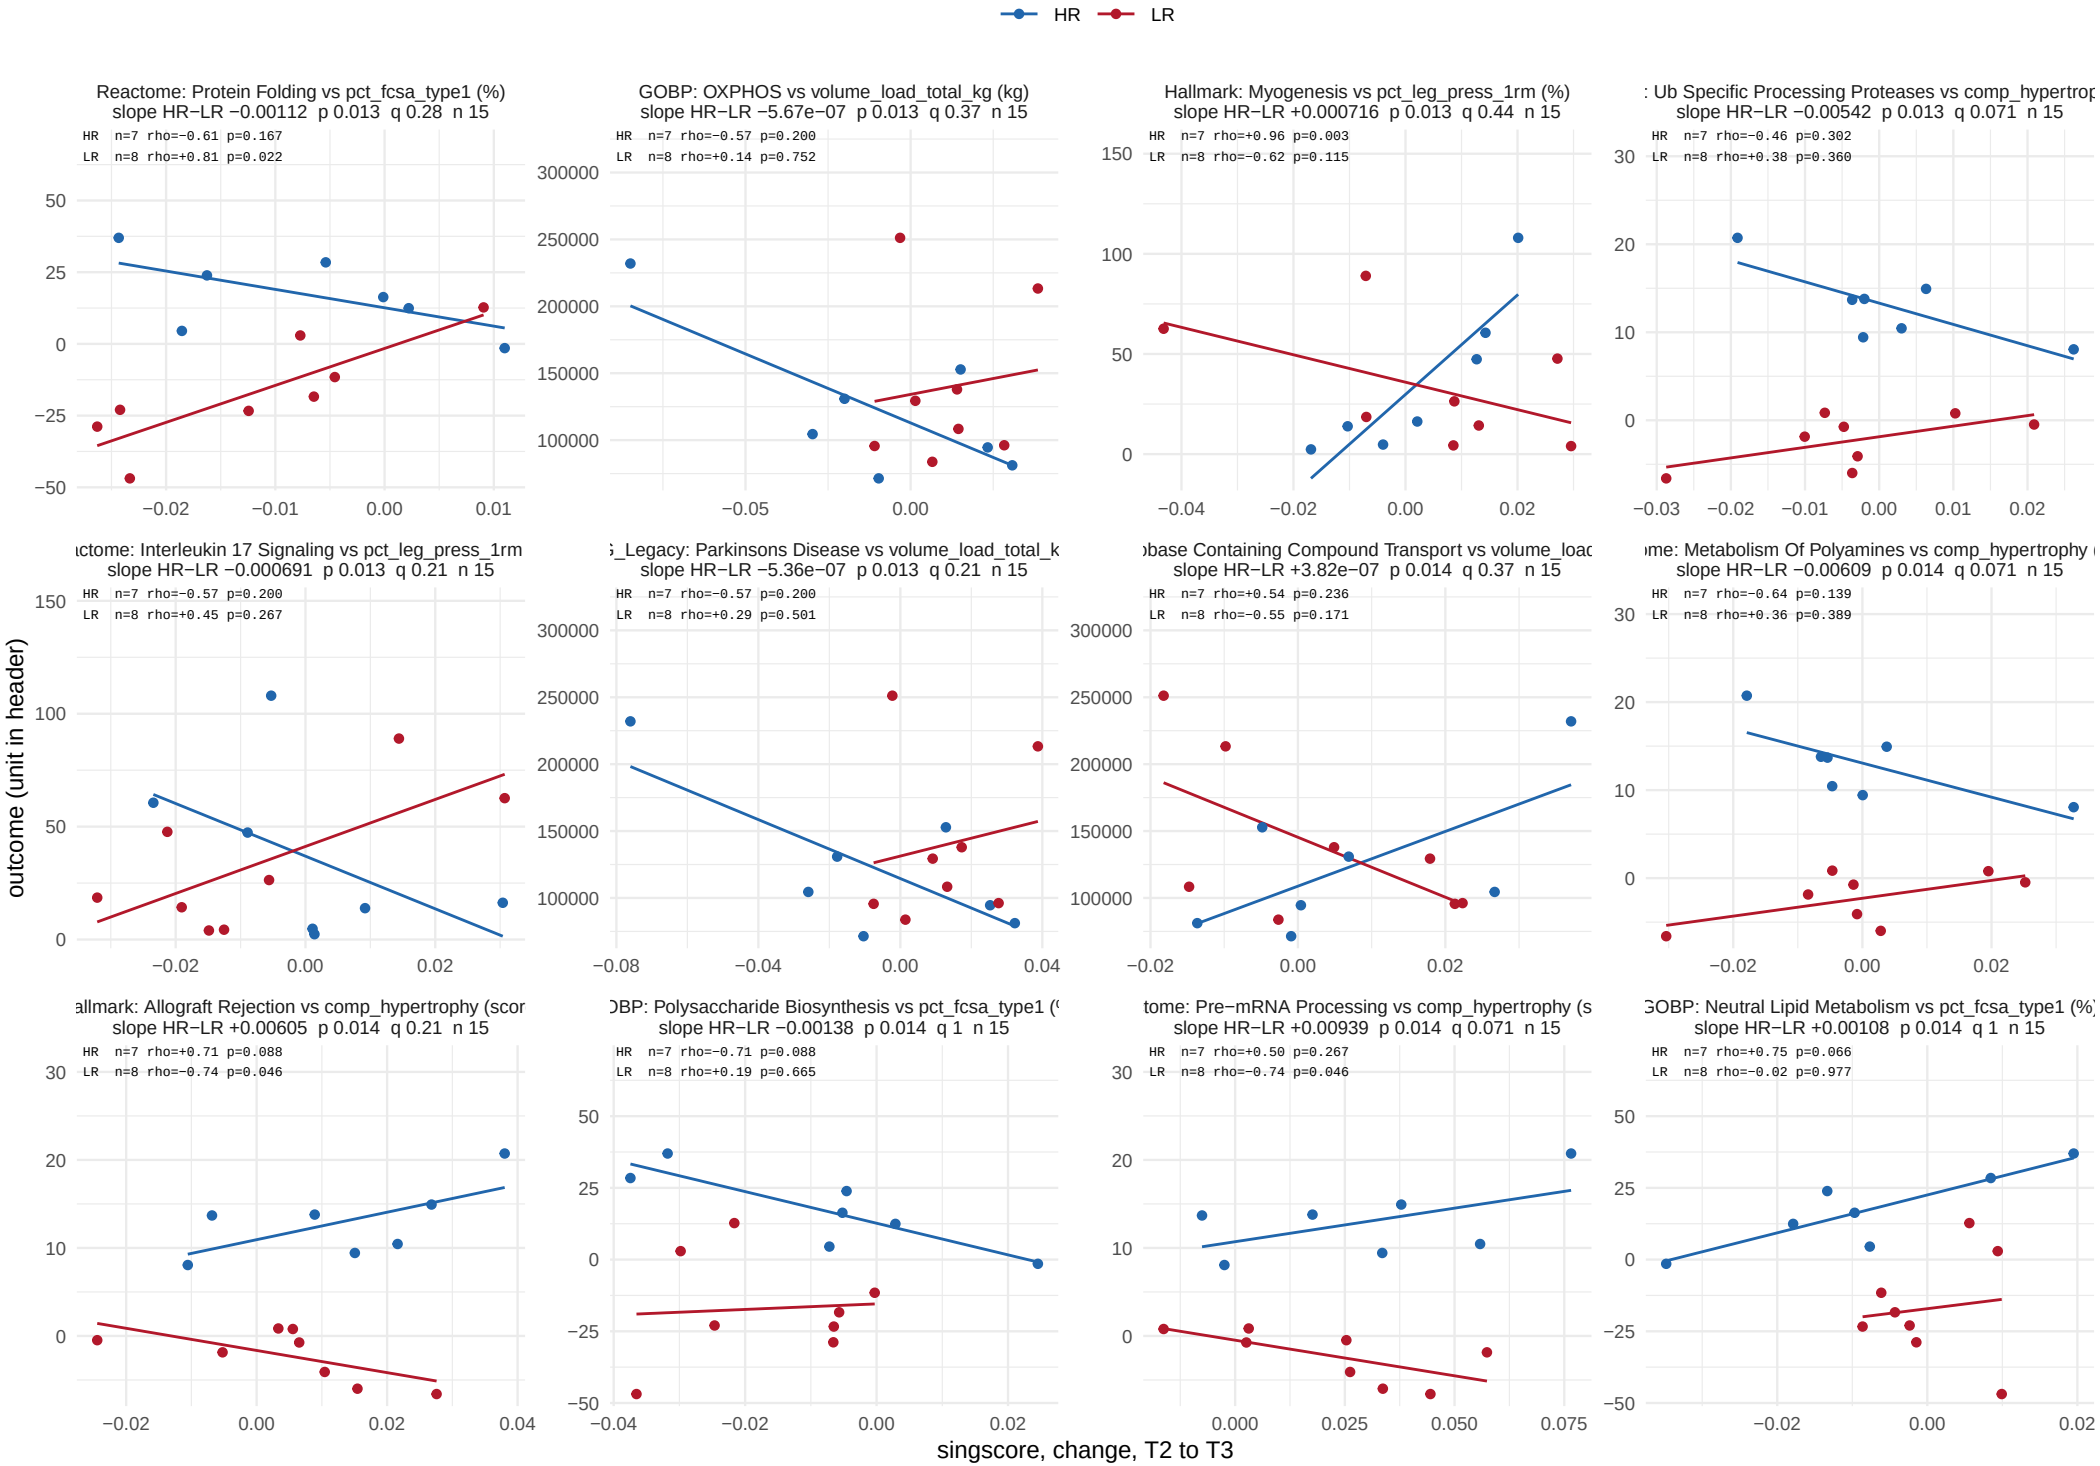


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, acute window


643 of 11024 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 15 of 54.

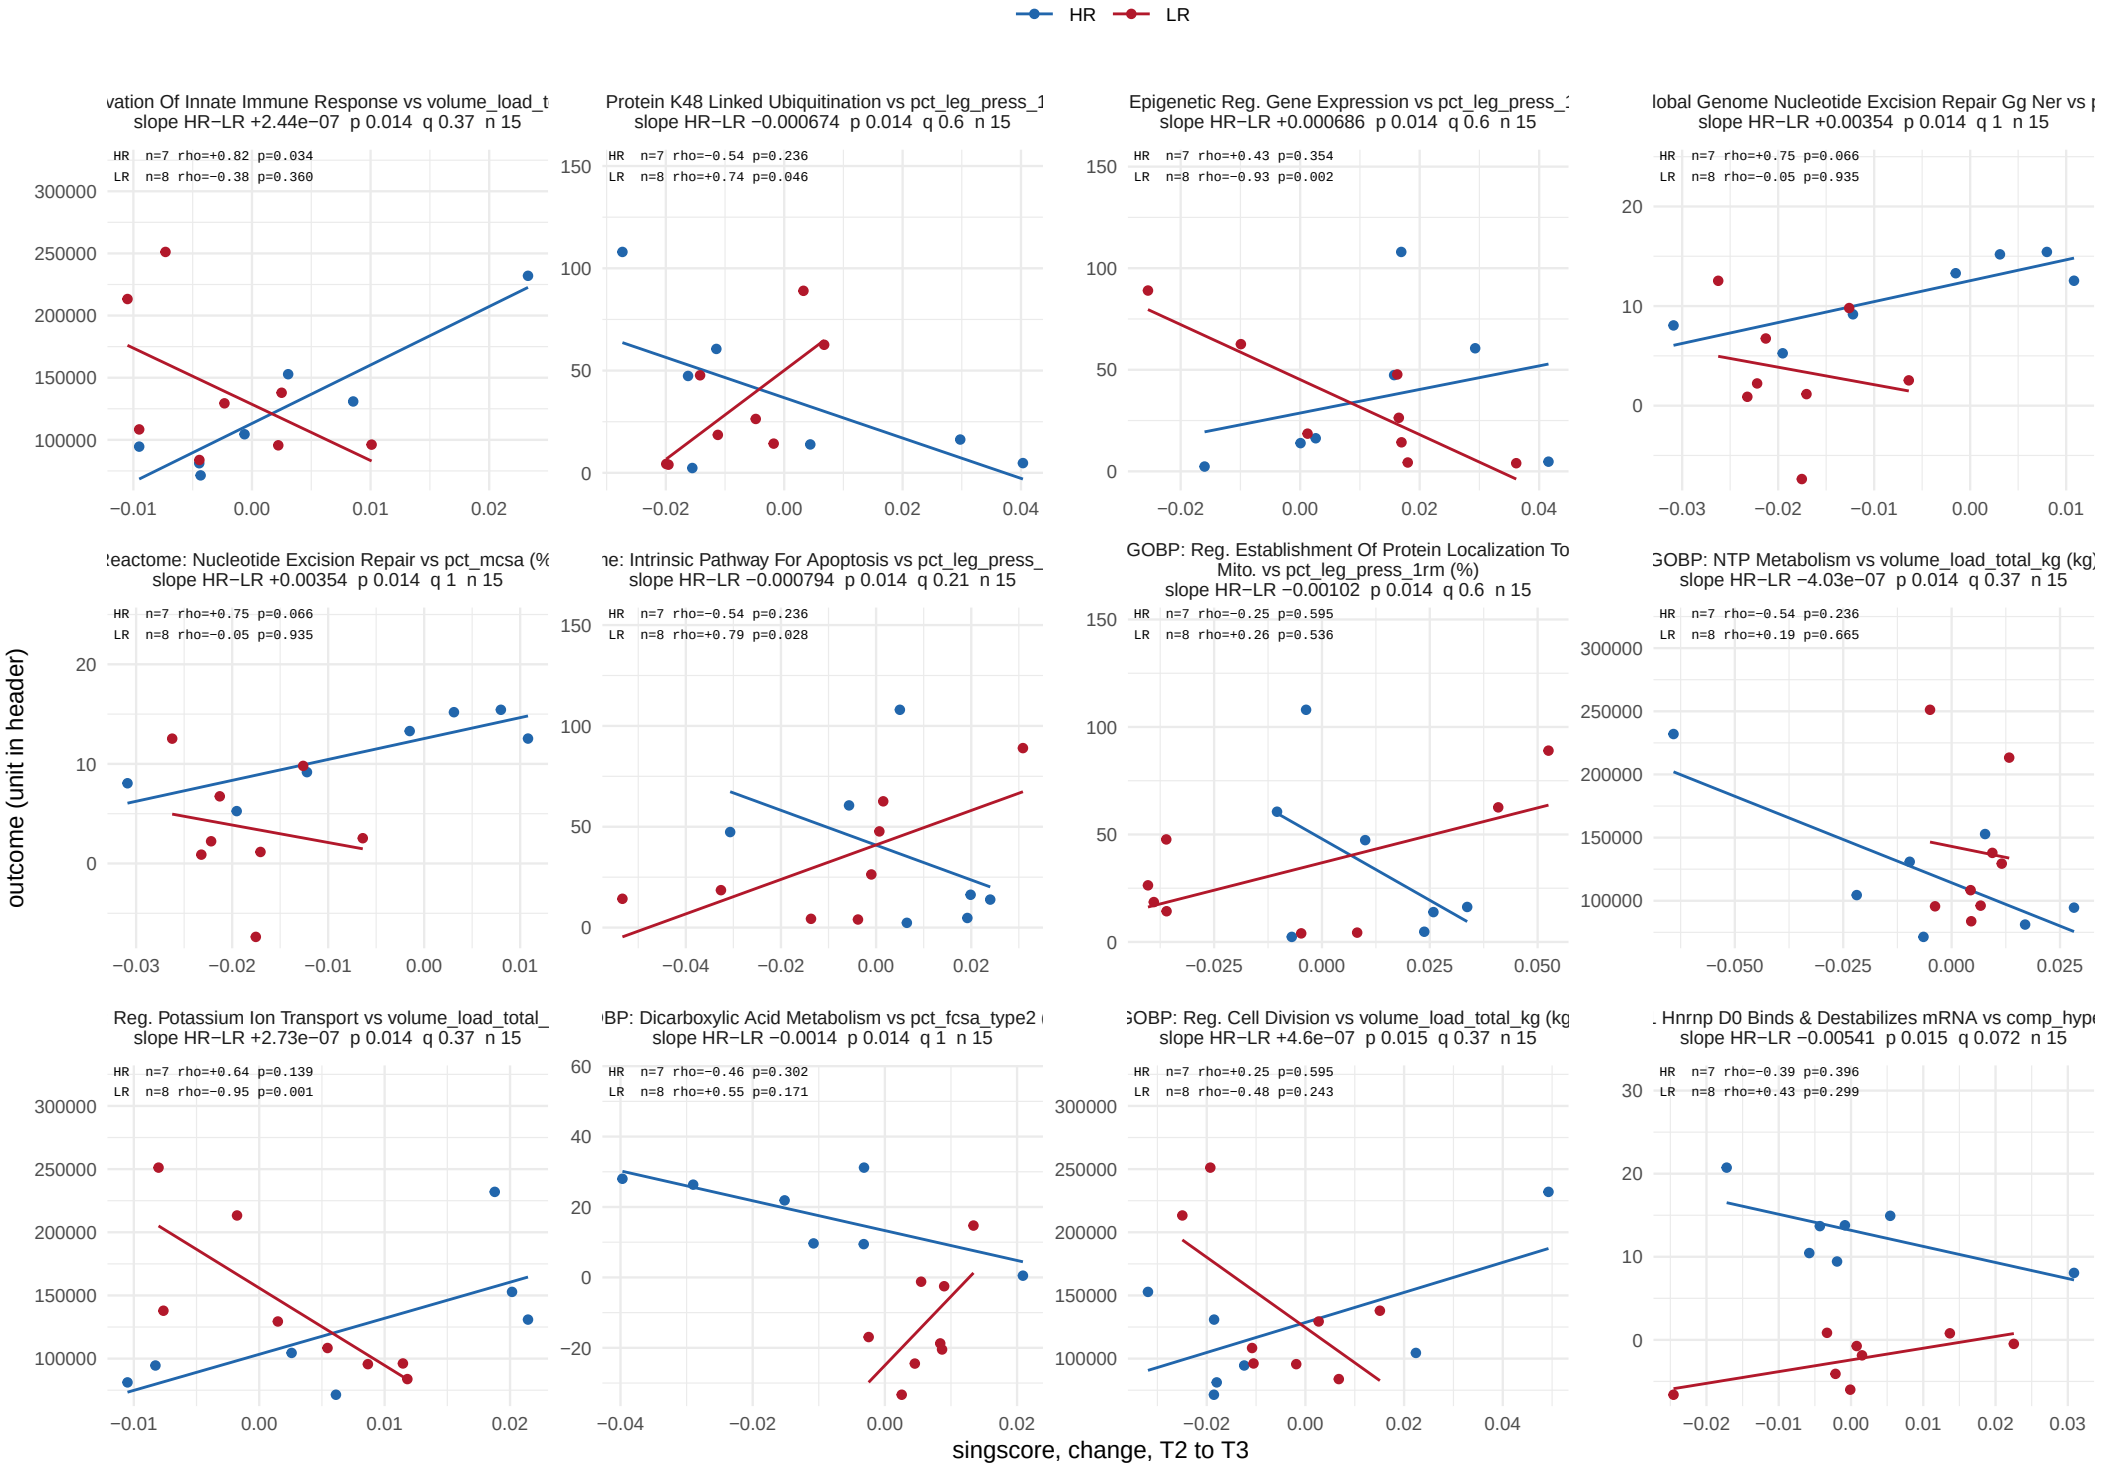


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, acute window


643 of 11024 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 16 of 54.

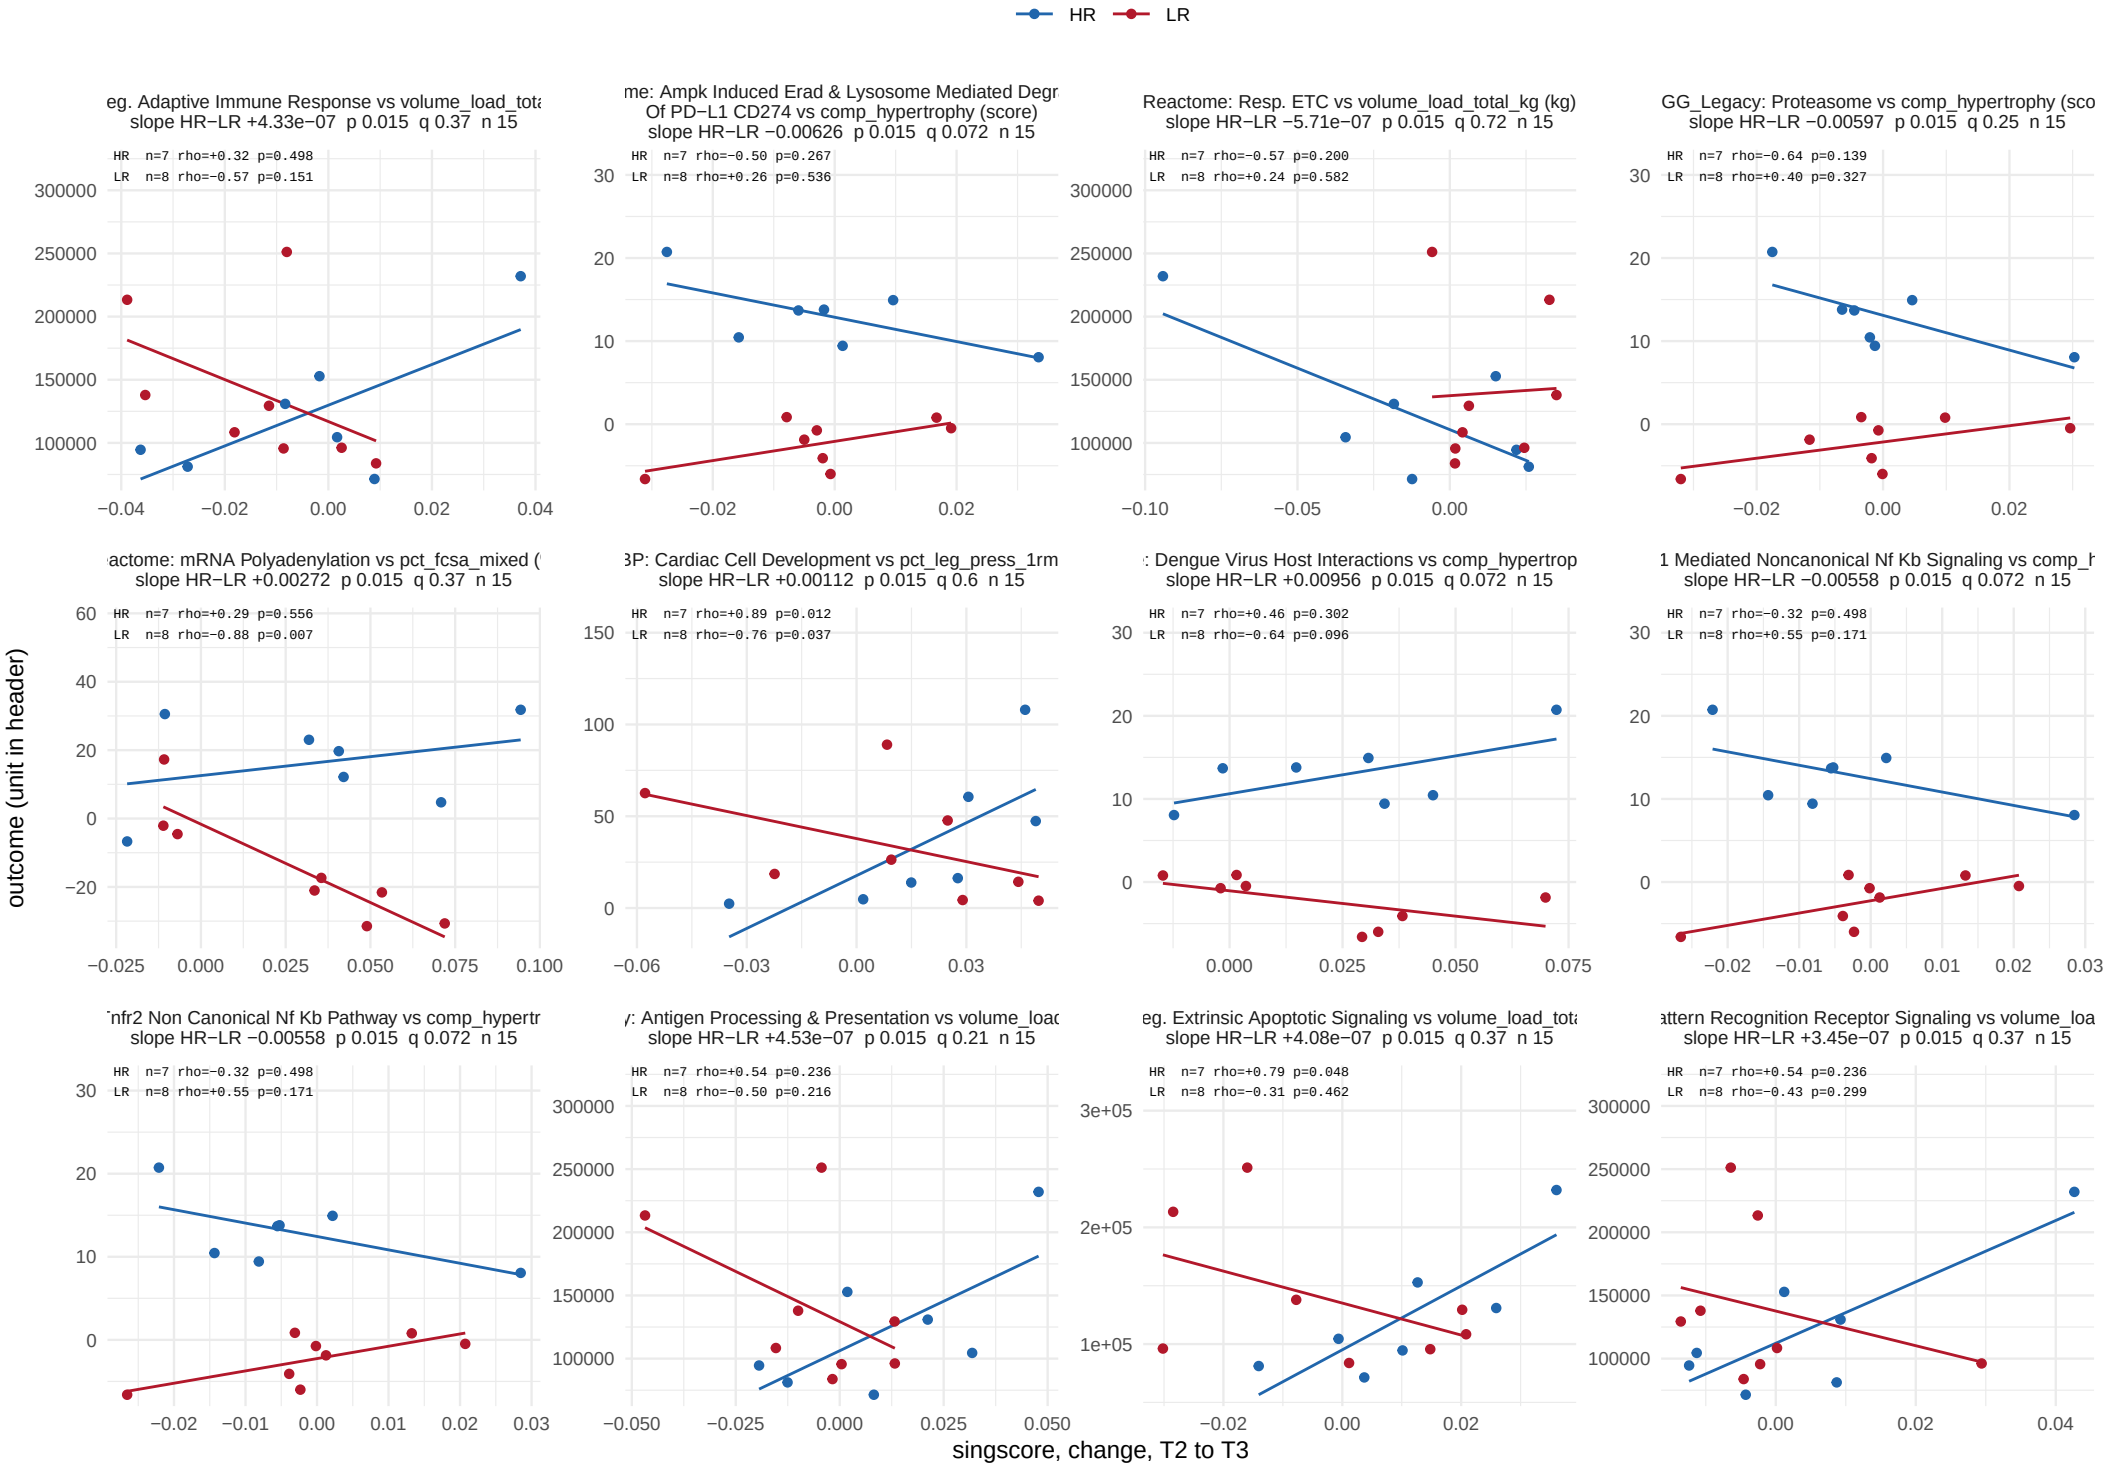


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

# Arm difference, acute window


643 of 11024 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 17 of 54.

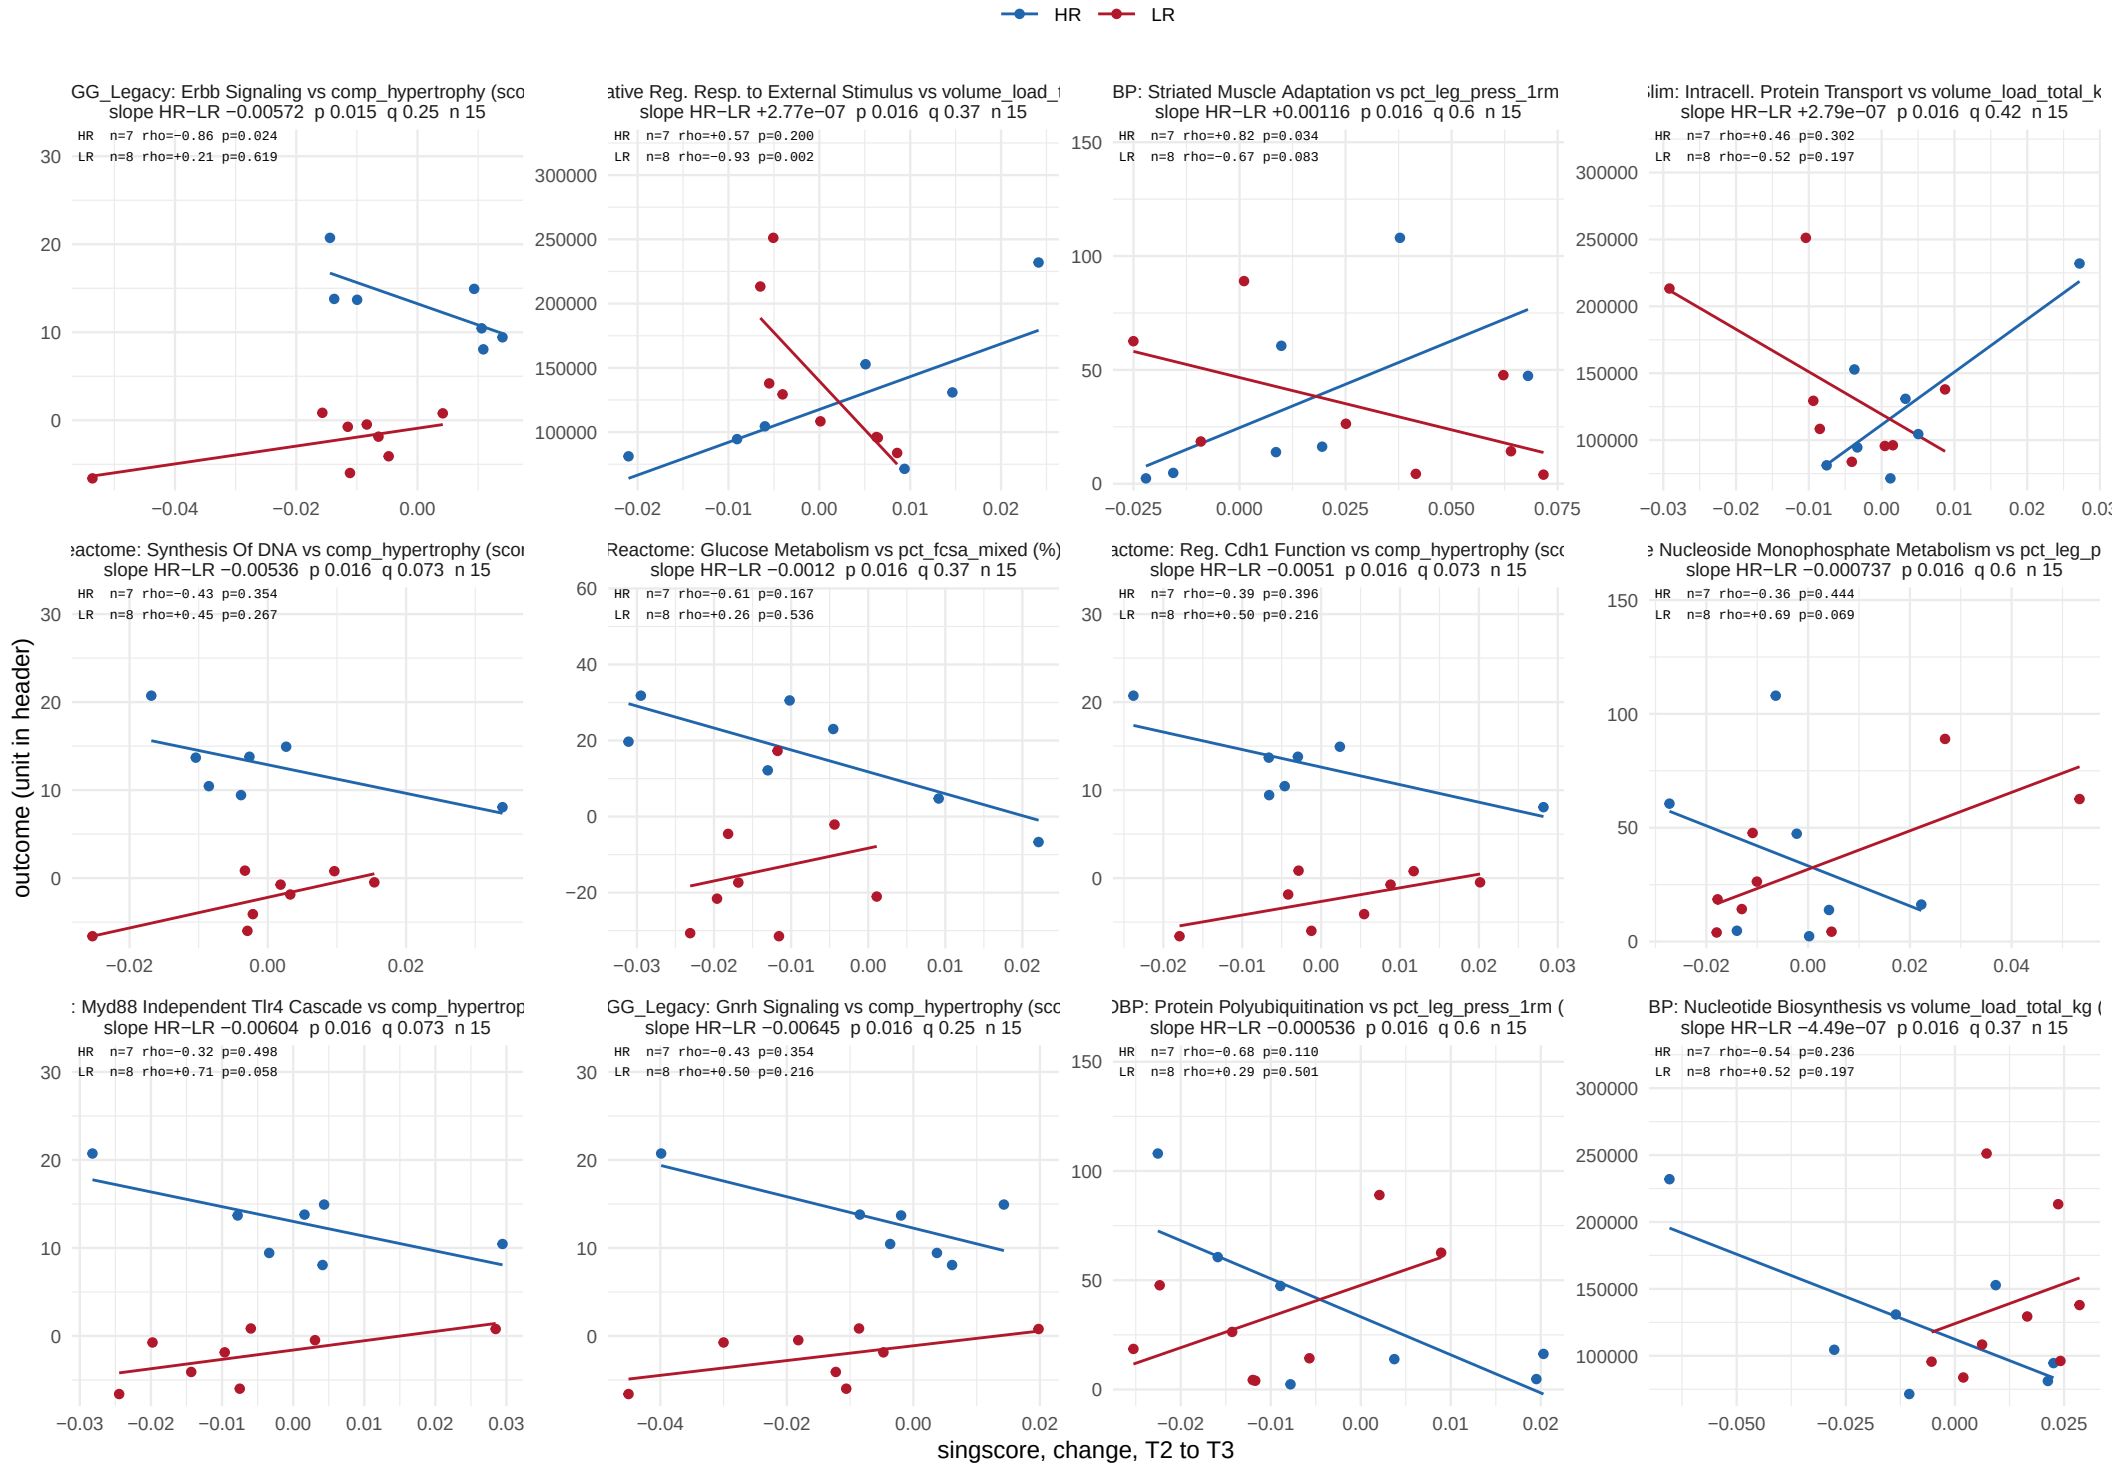


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

# Arm difference, acute window


643 of 11024 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 18 of 54.

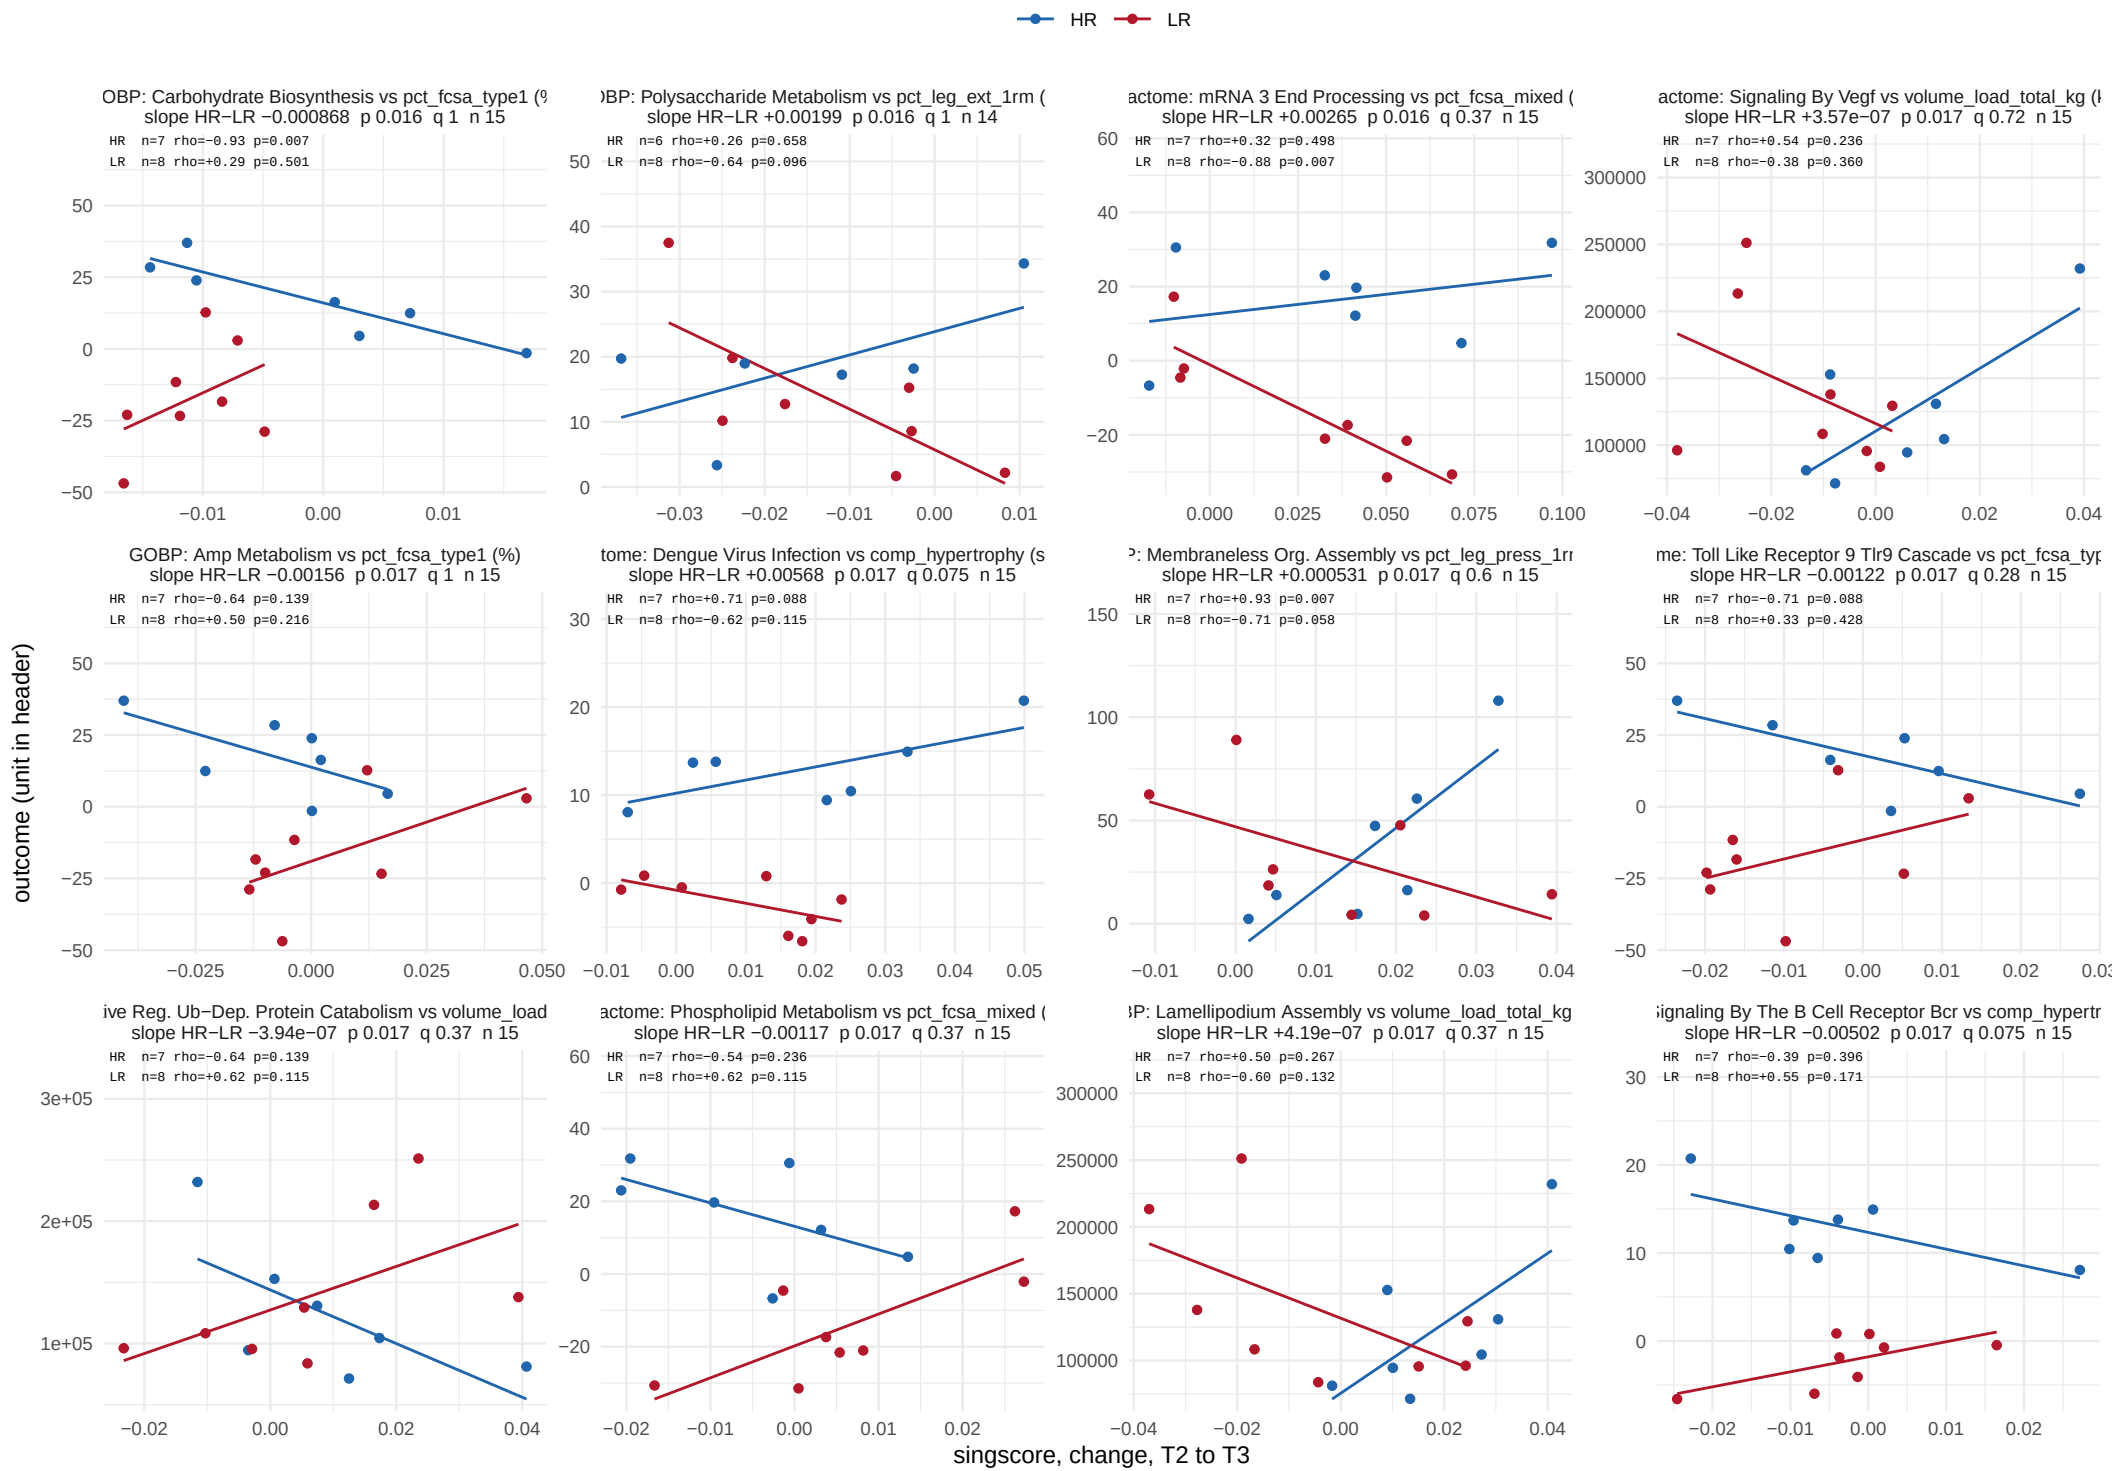


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, acute window


643 of 11024 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 19 of 54.

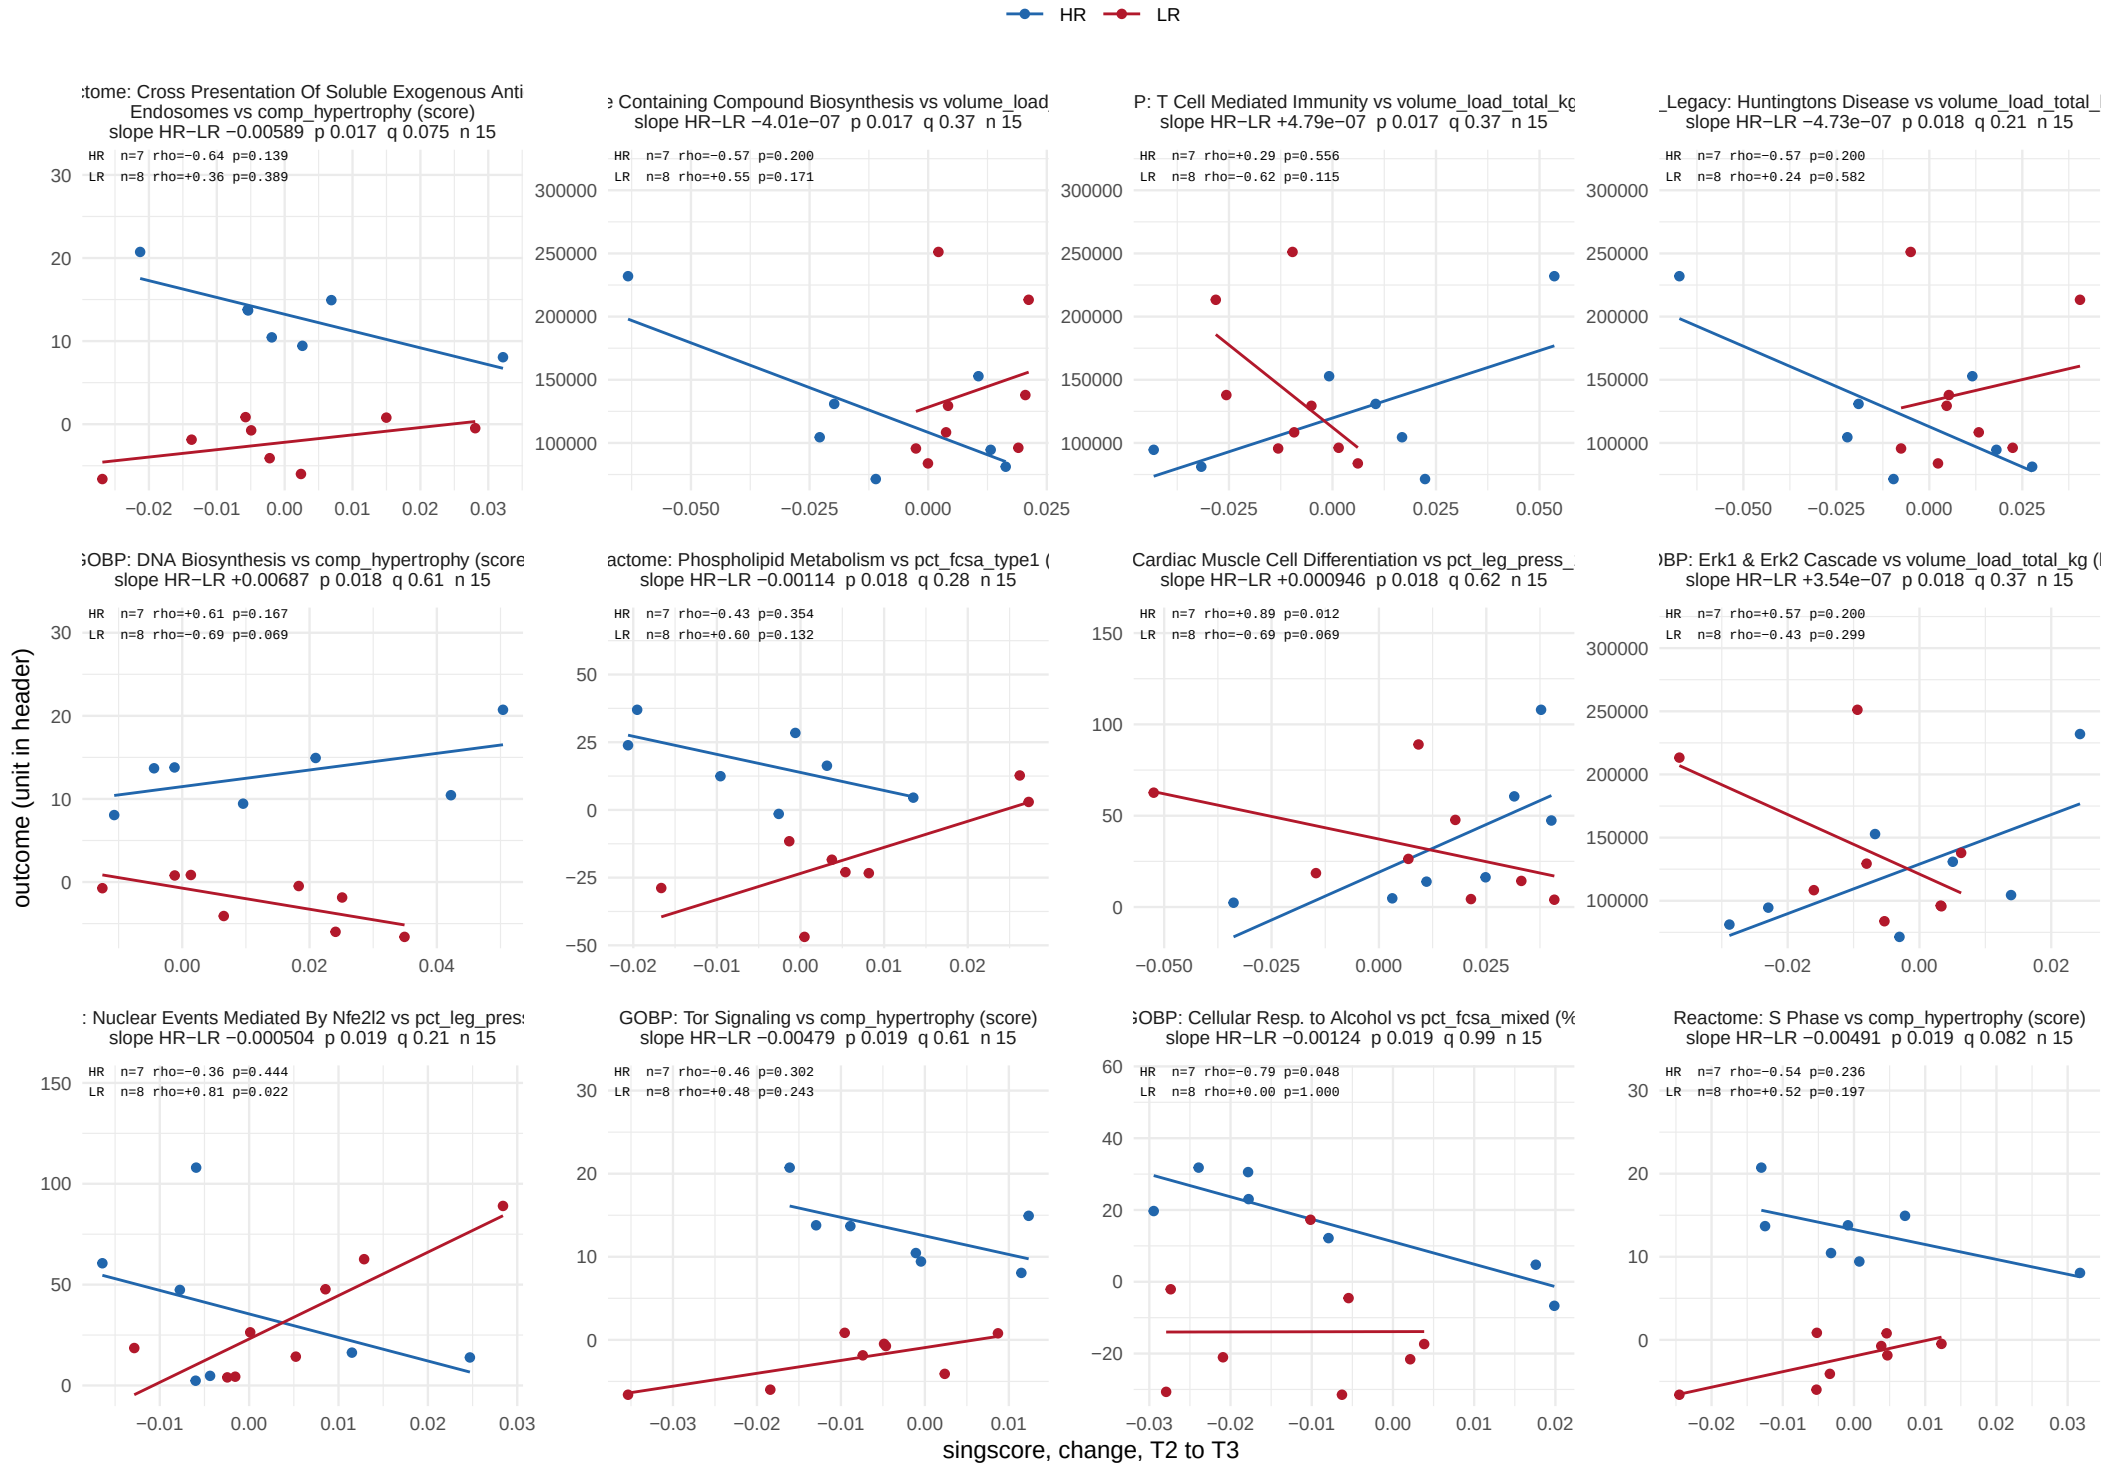


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, acute window


643 of 11024 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 20 of 54.

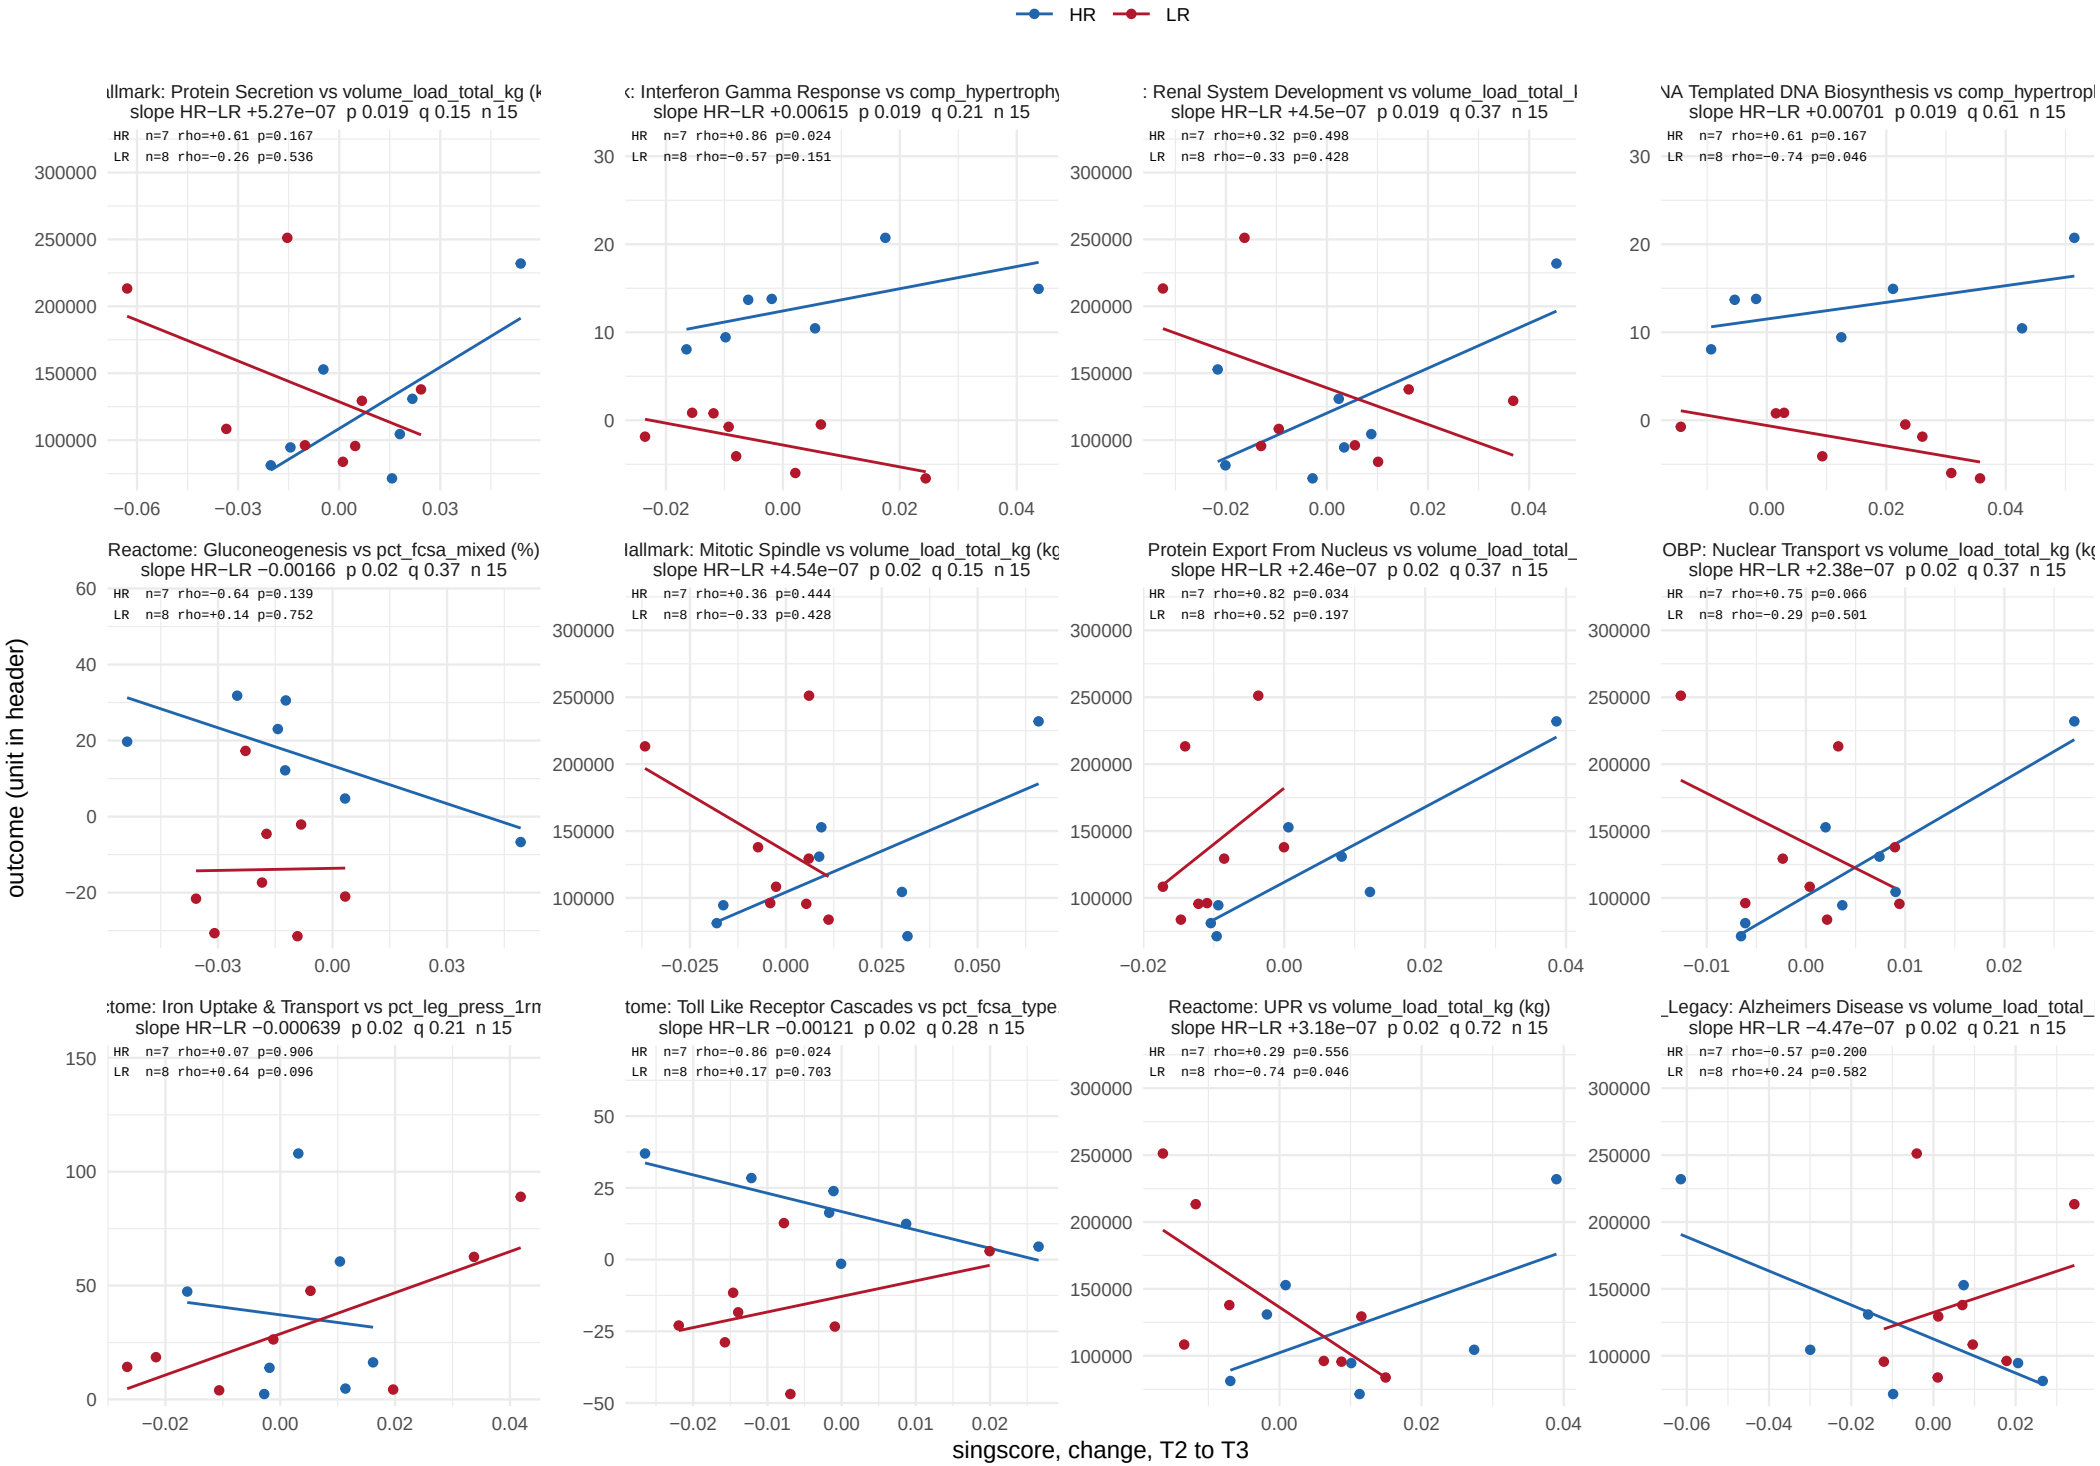


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, acute window


643 of 11024 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 21 of 54.

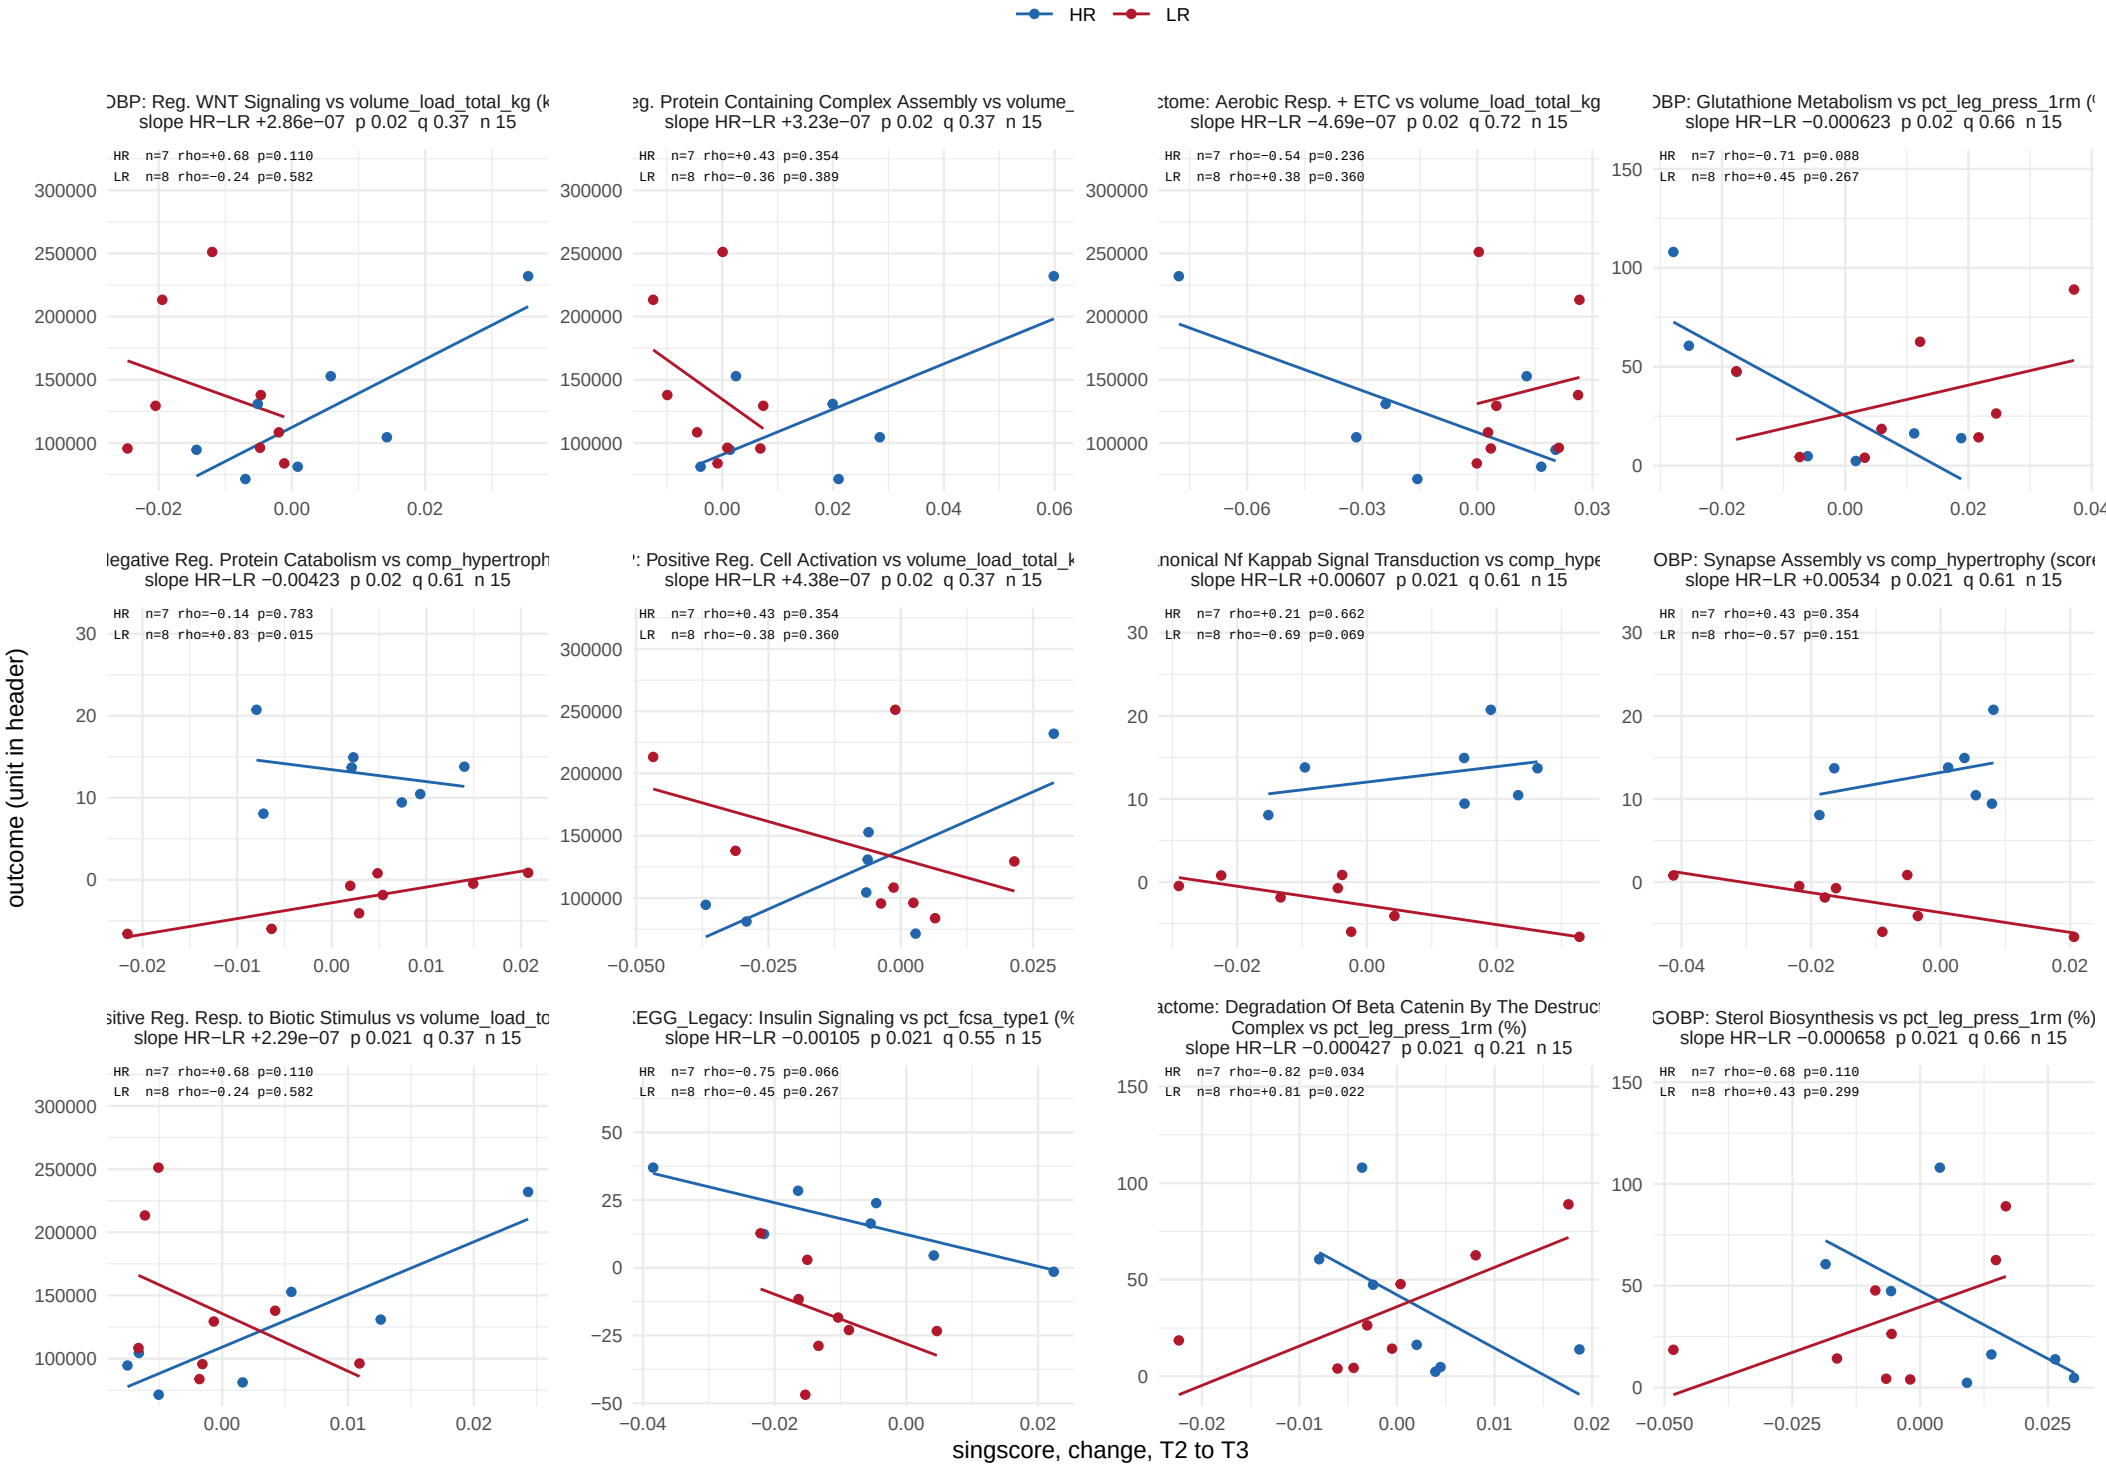


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, acute window


643 of 11024 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 22 of 54.

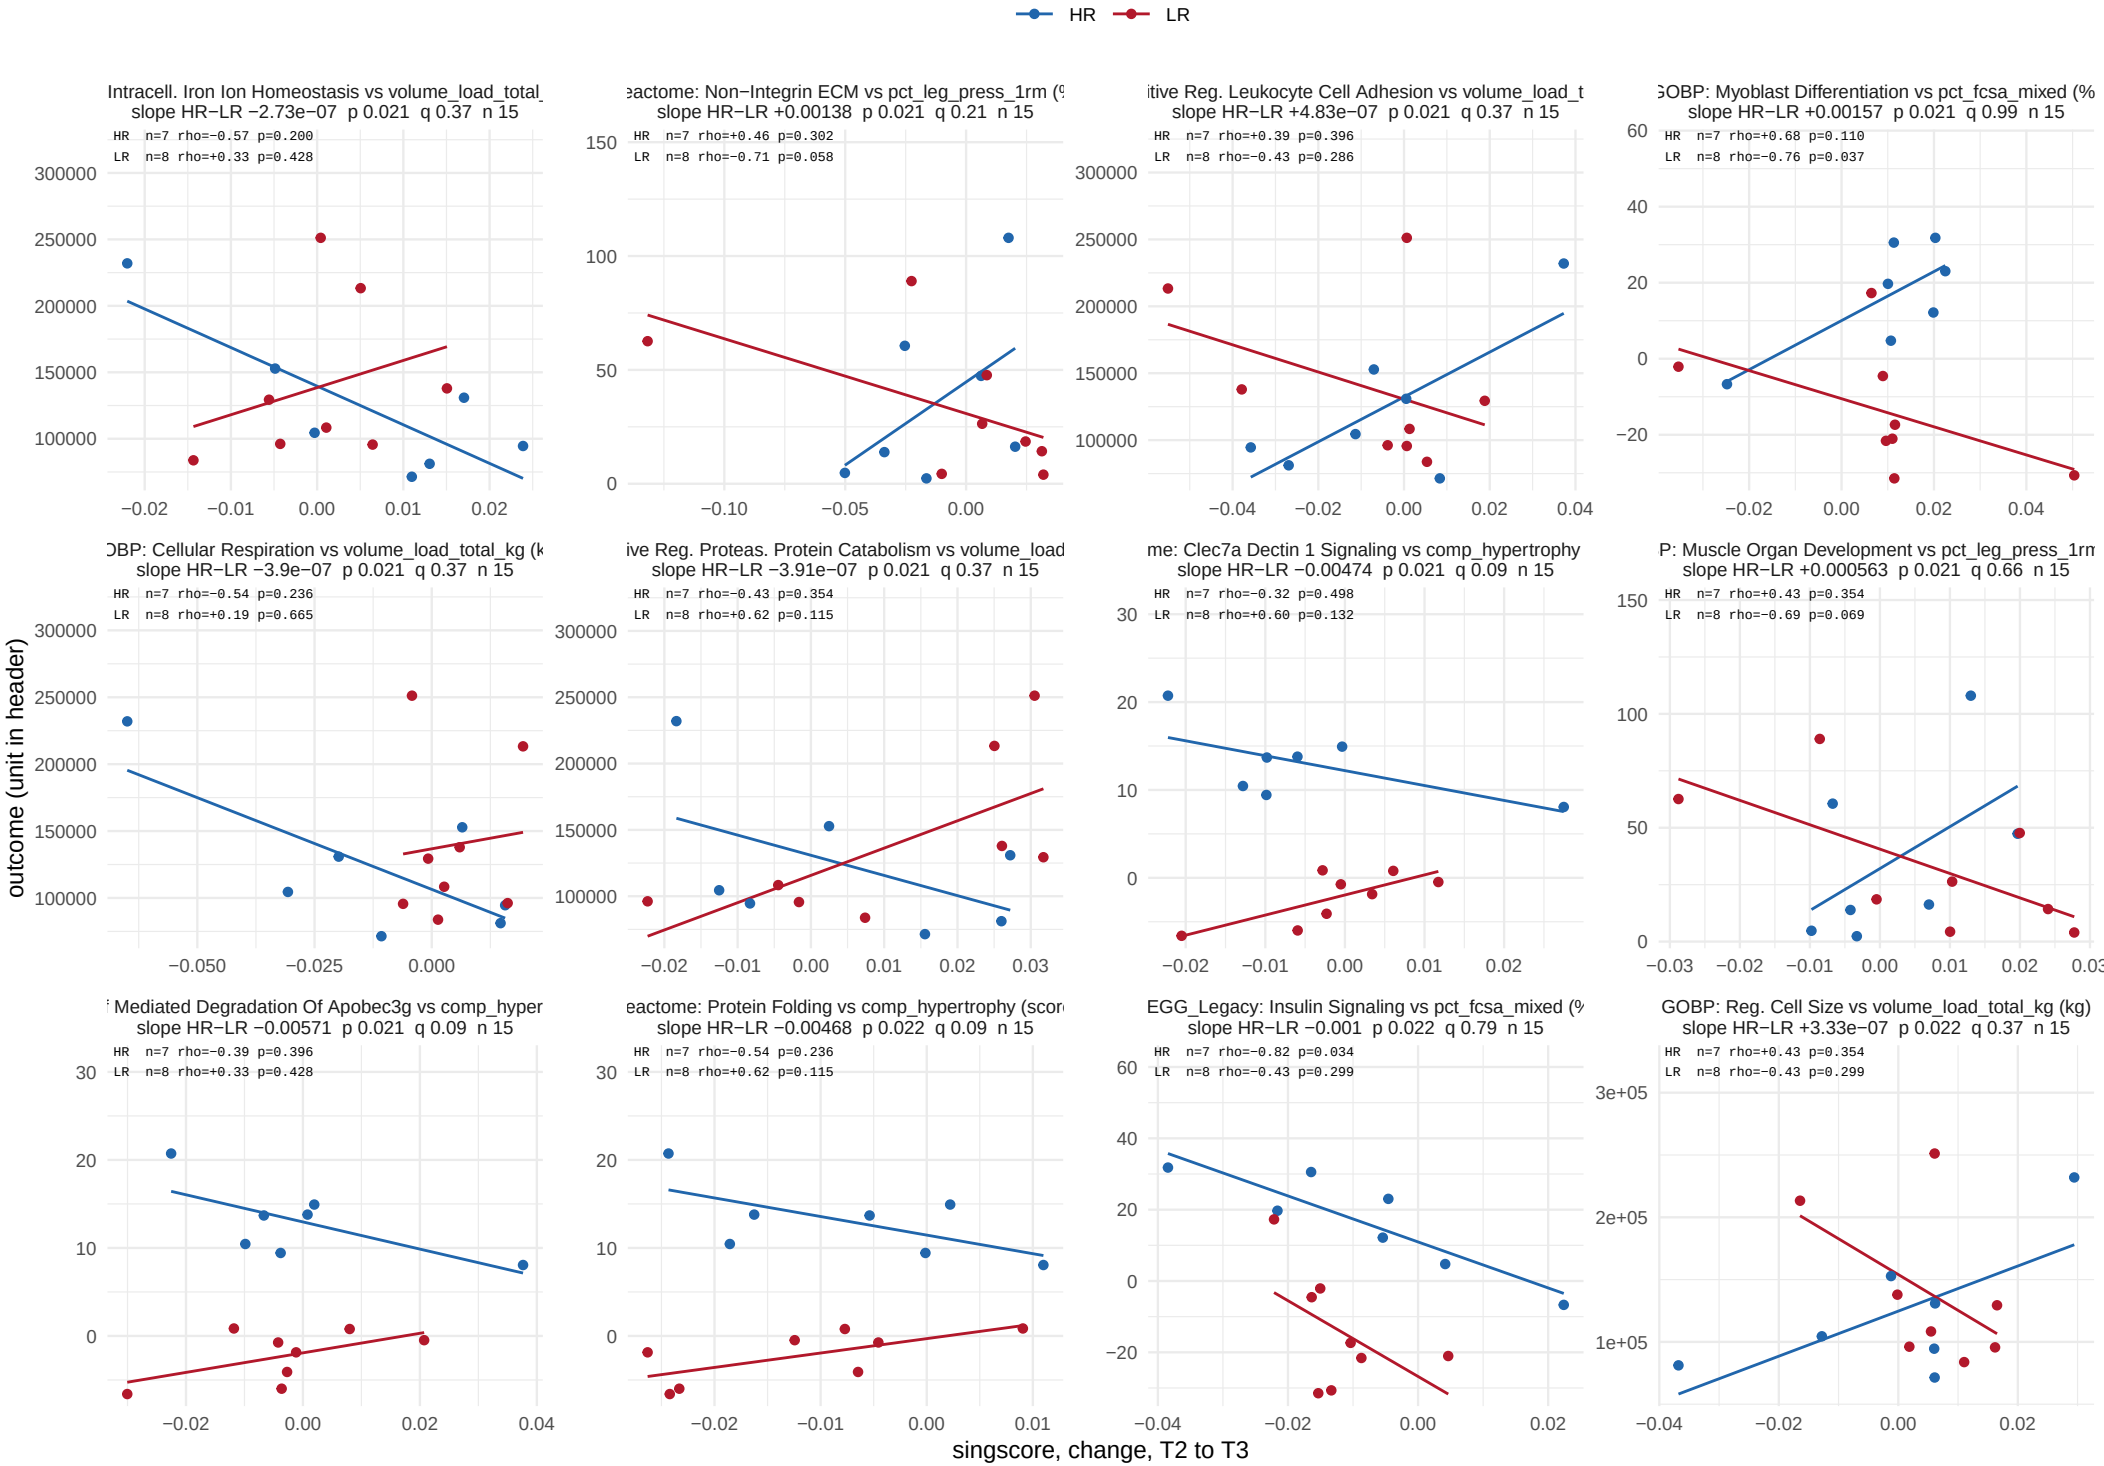


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, acute window


643 of 11024 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 23 of 54.

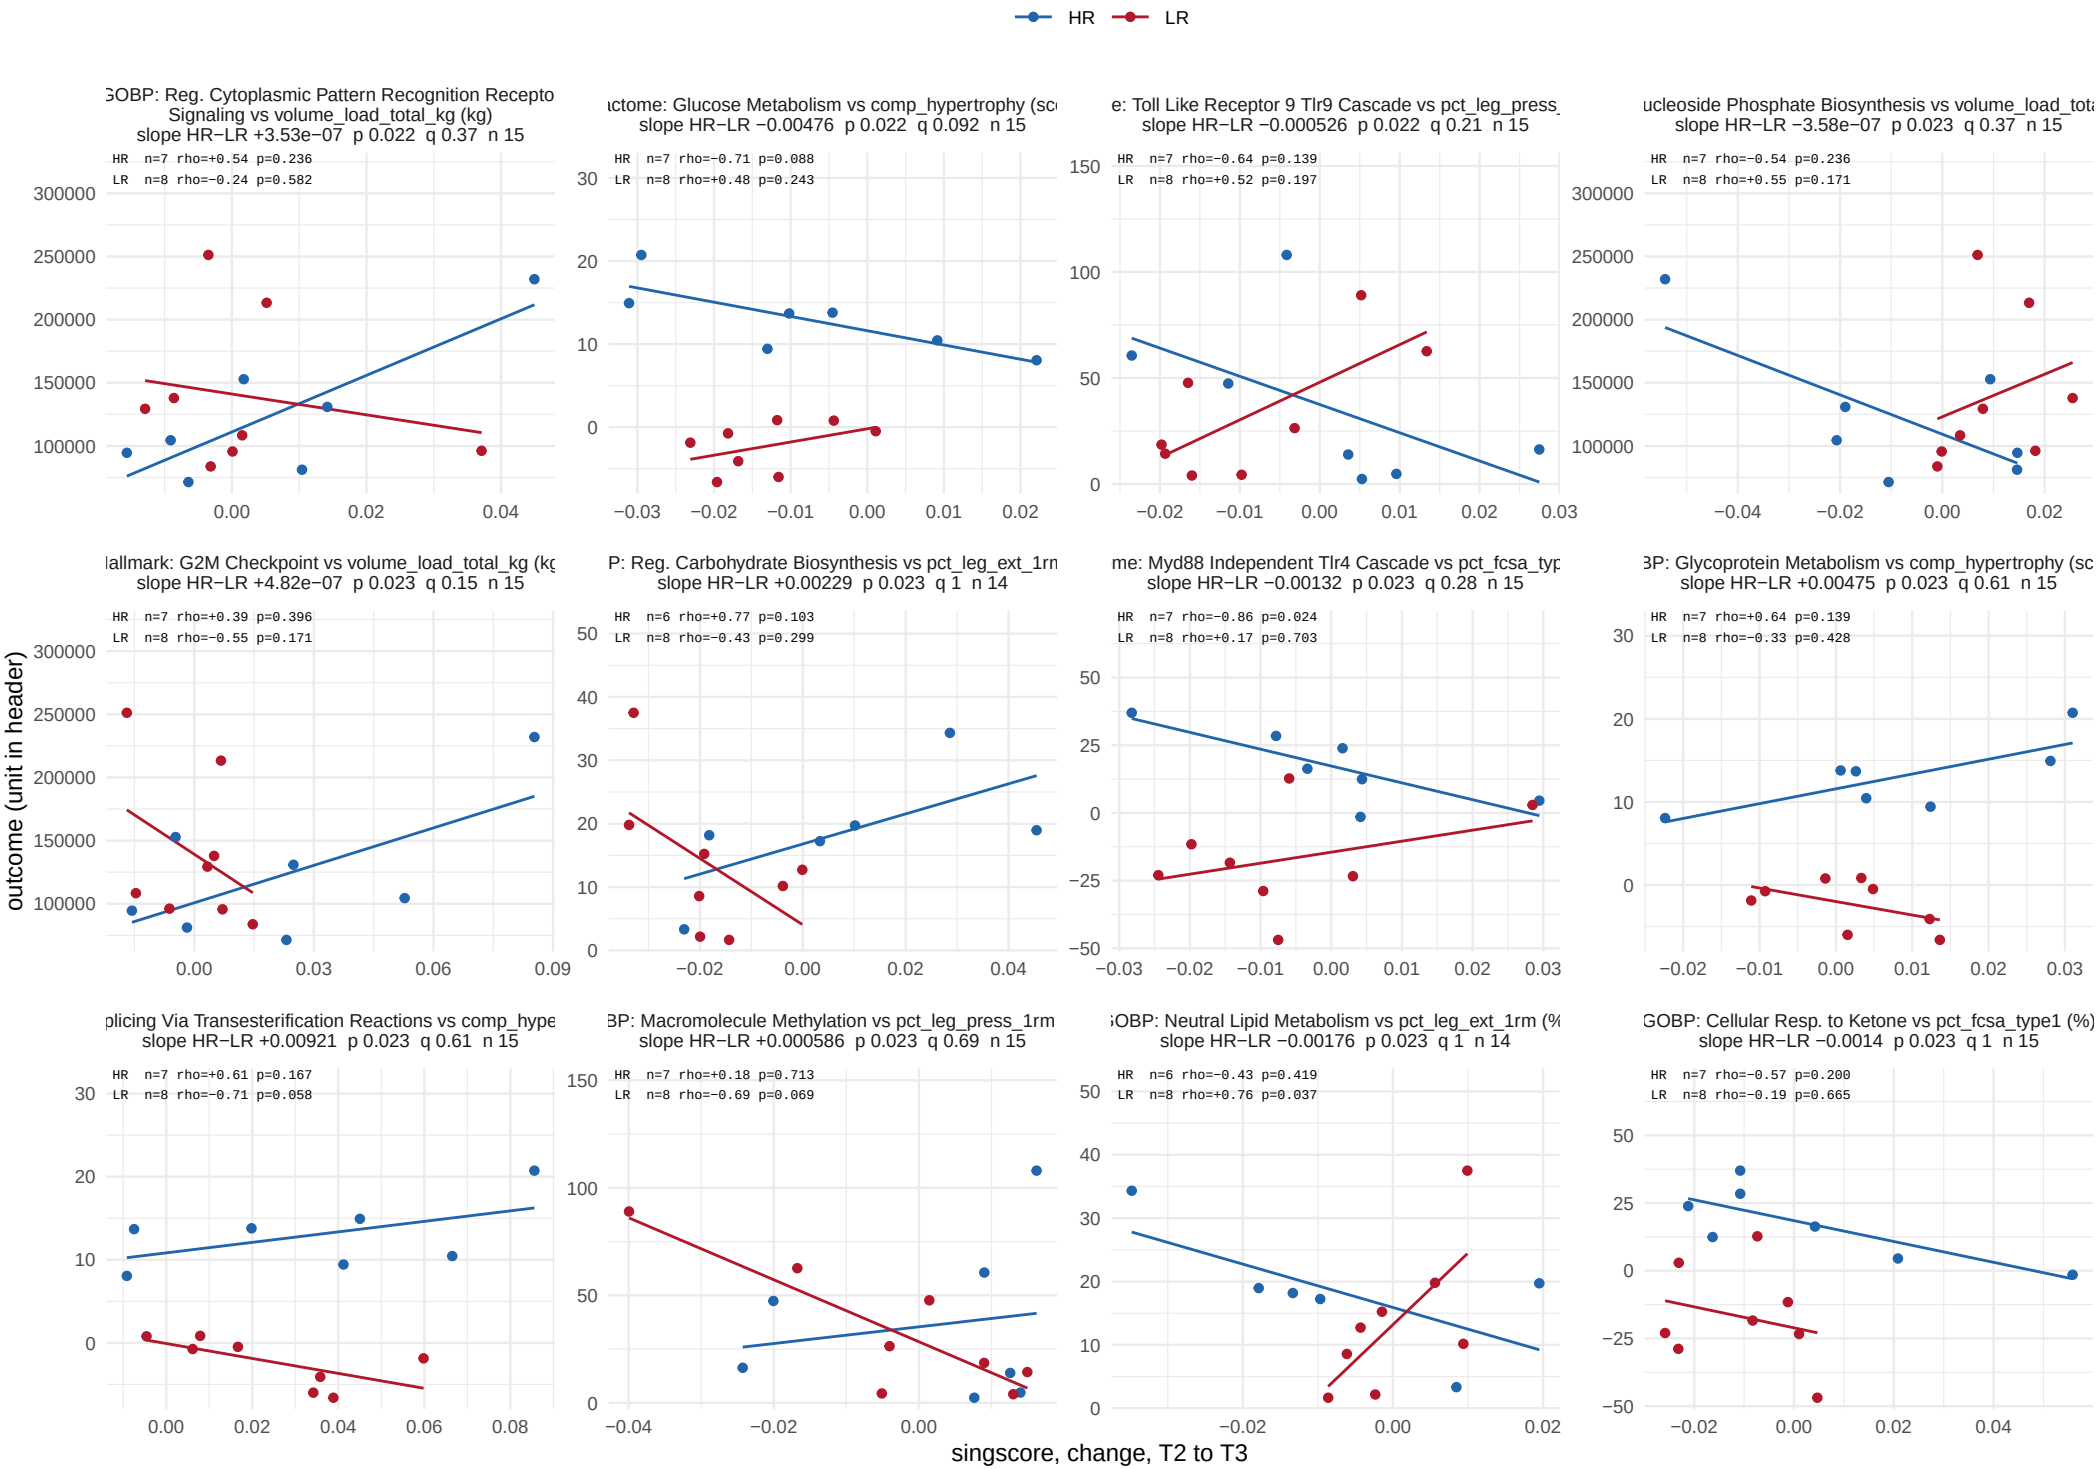


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, acute window


643 of 11024 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 24 of 54.

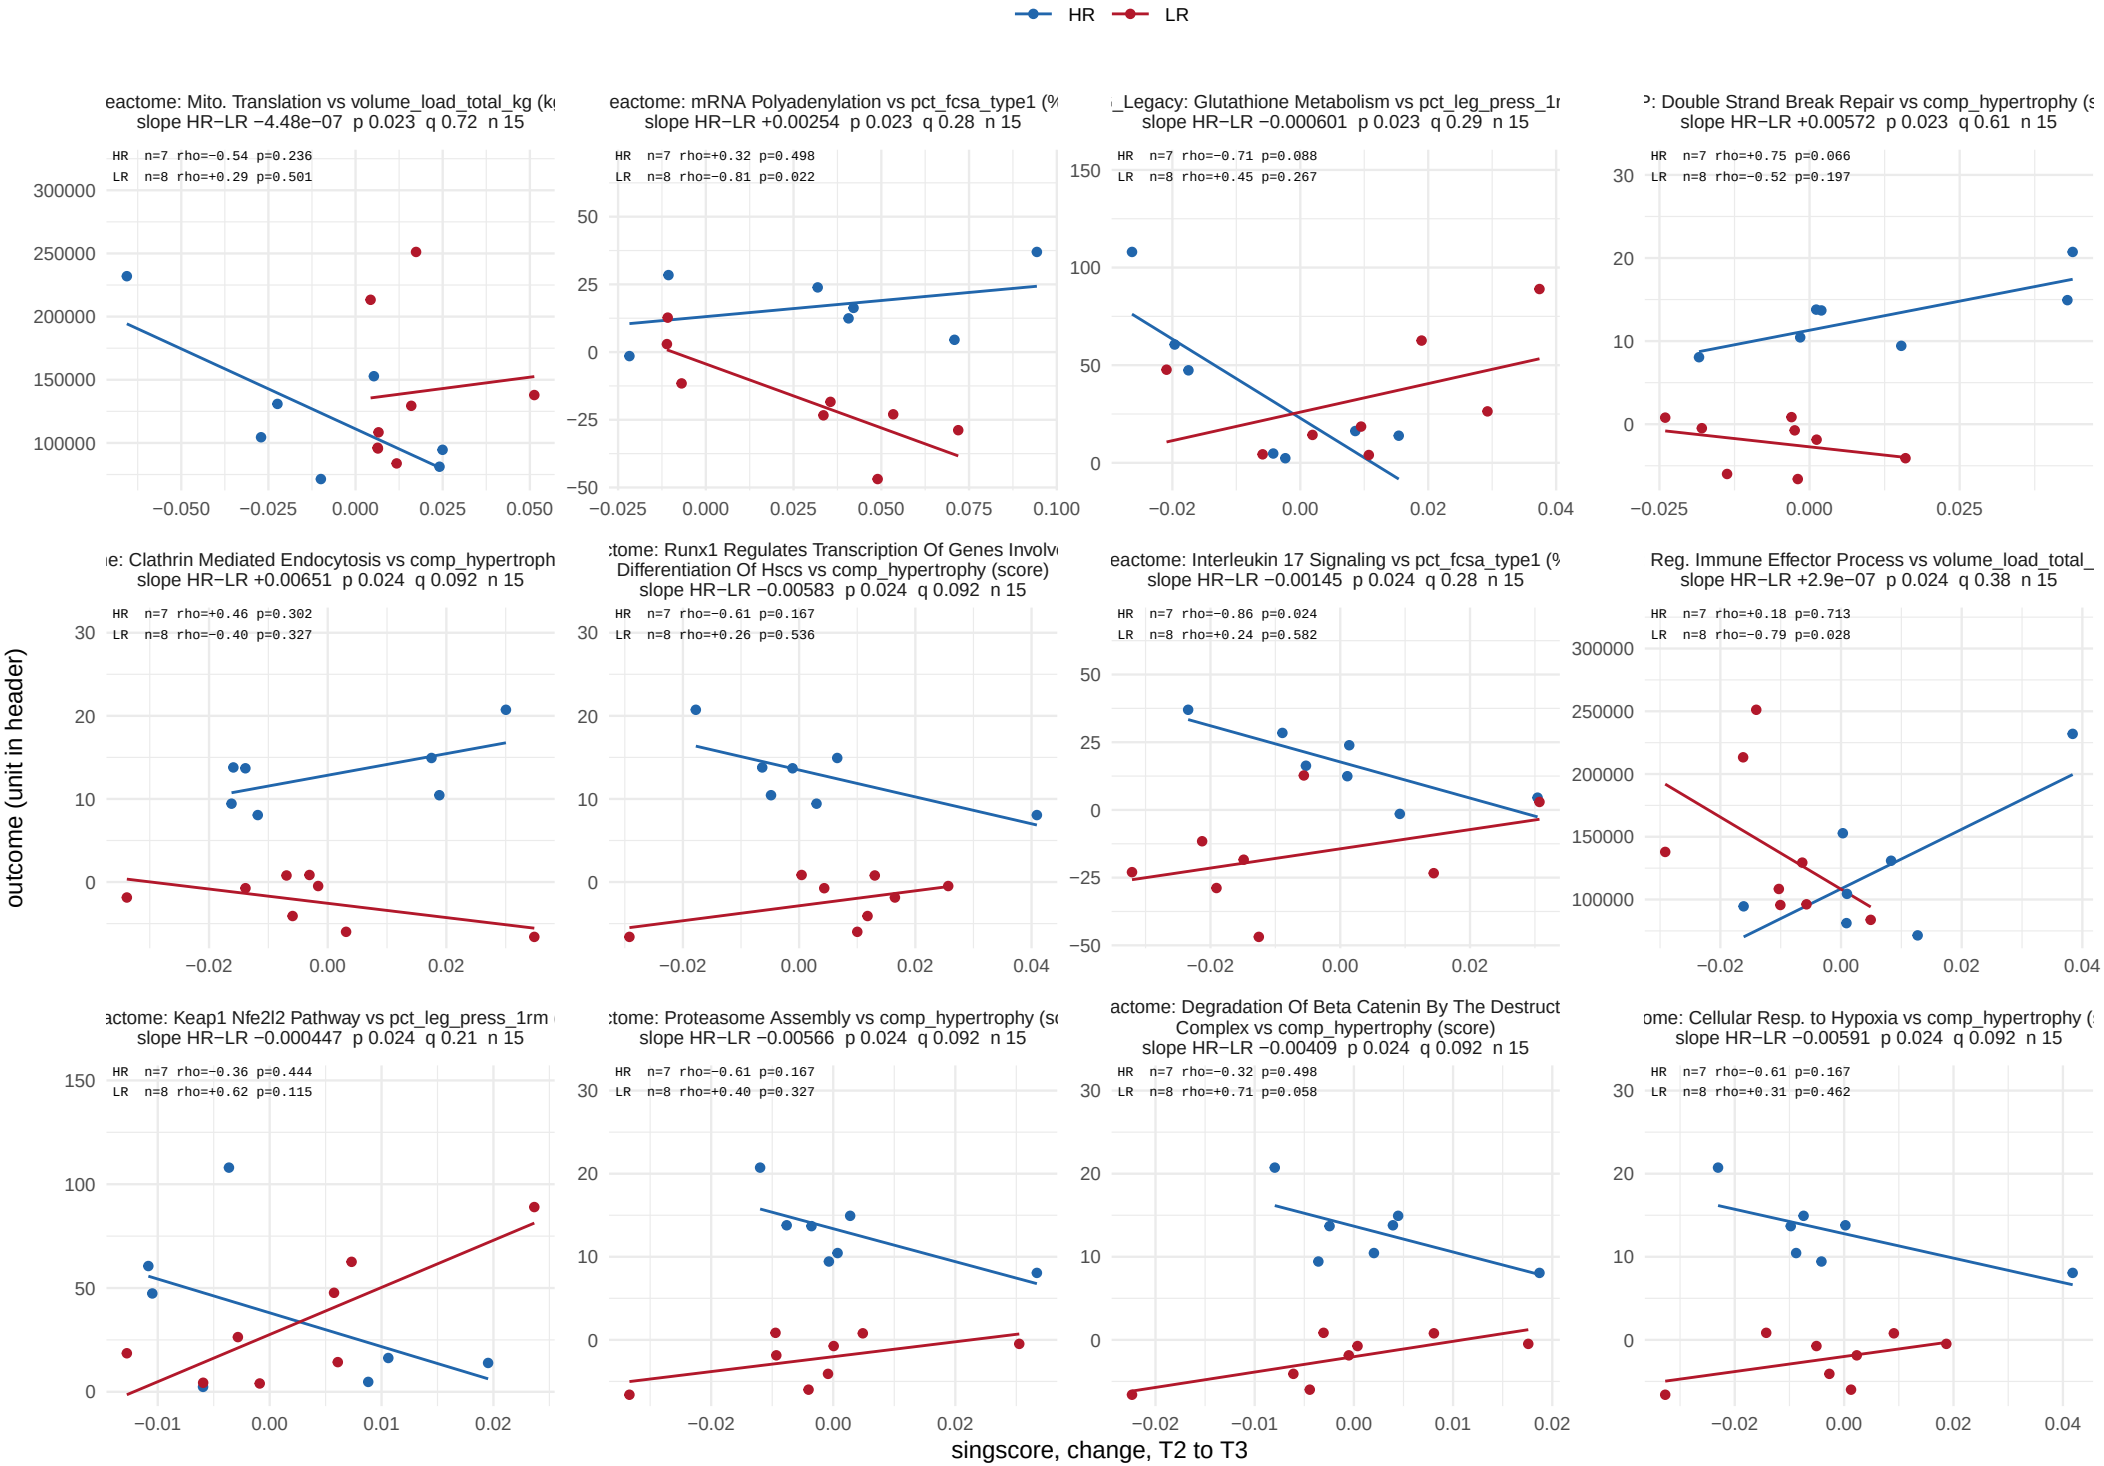


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, acute window


643 of 11024 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 25 of 54.

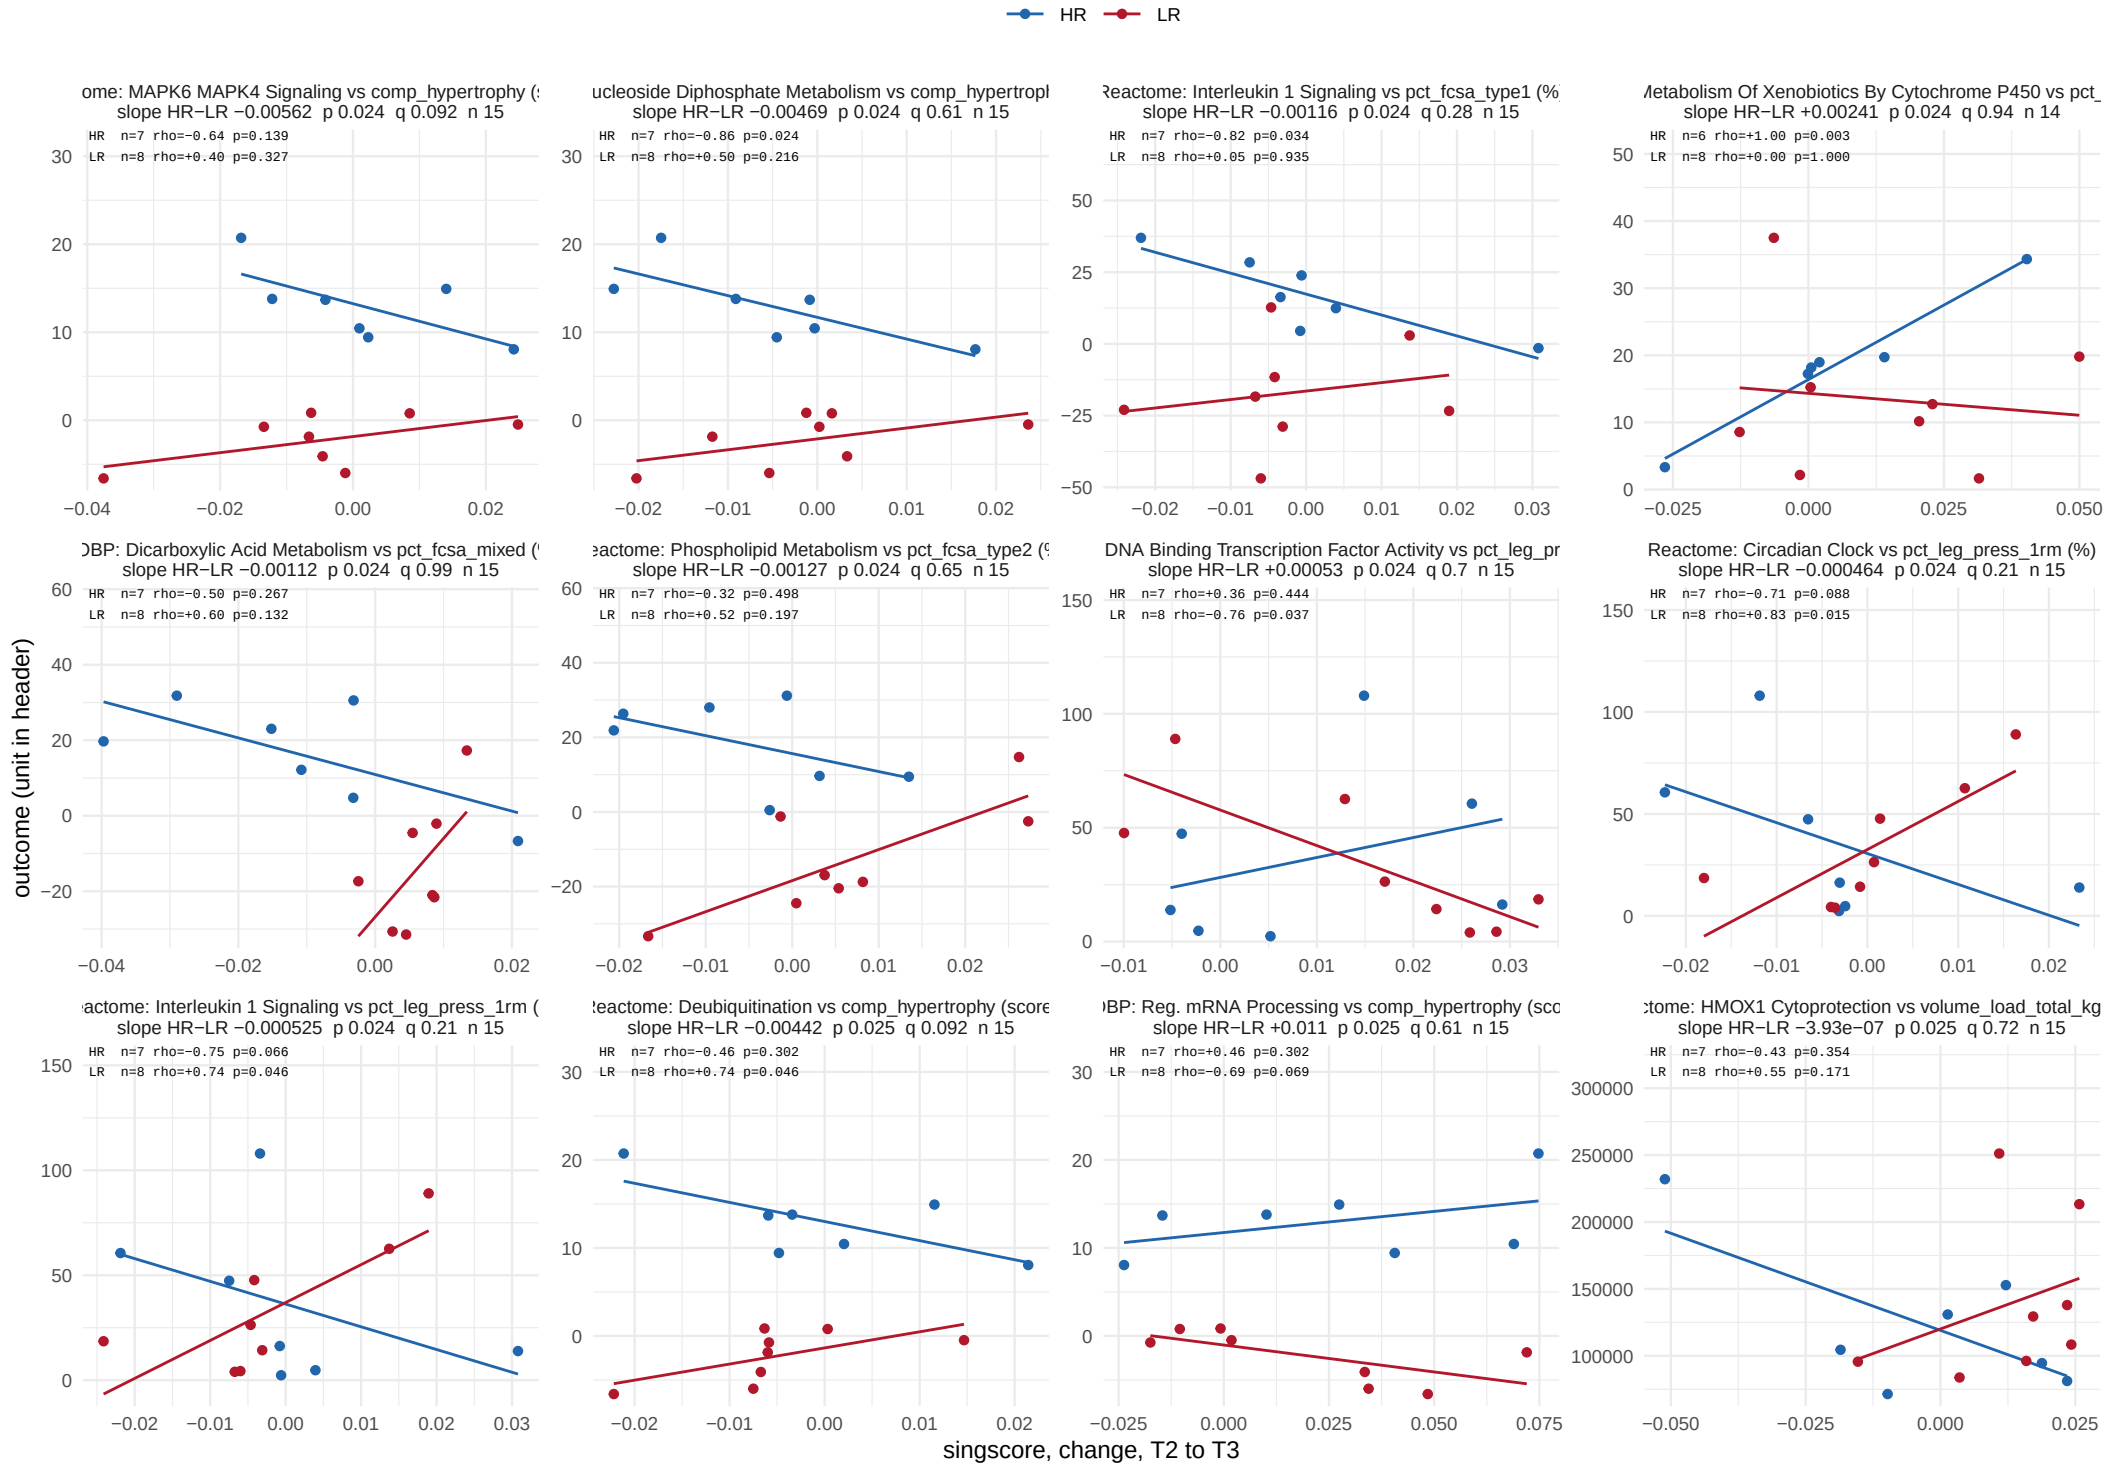


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, acute window


643 of 11024 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 26 of 54.

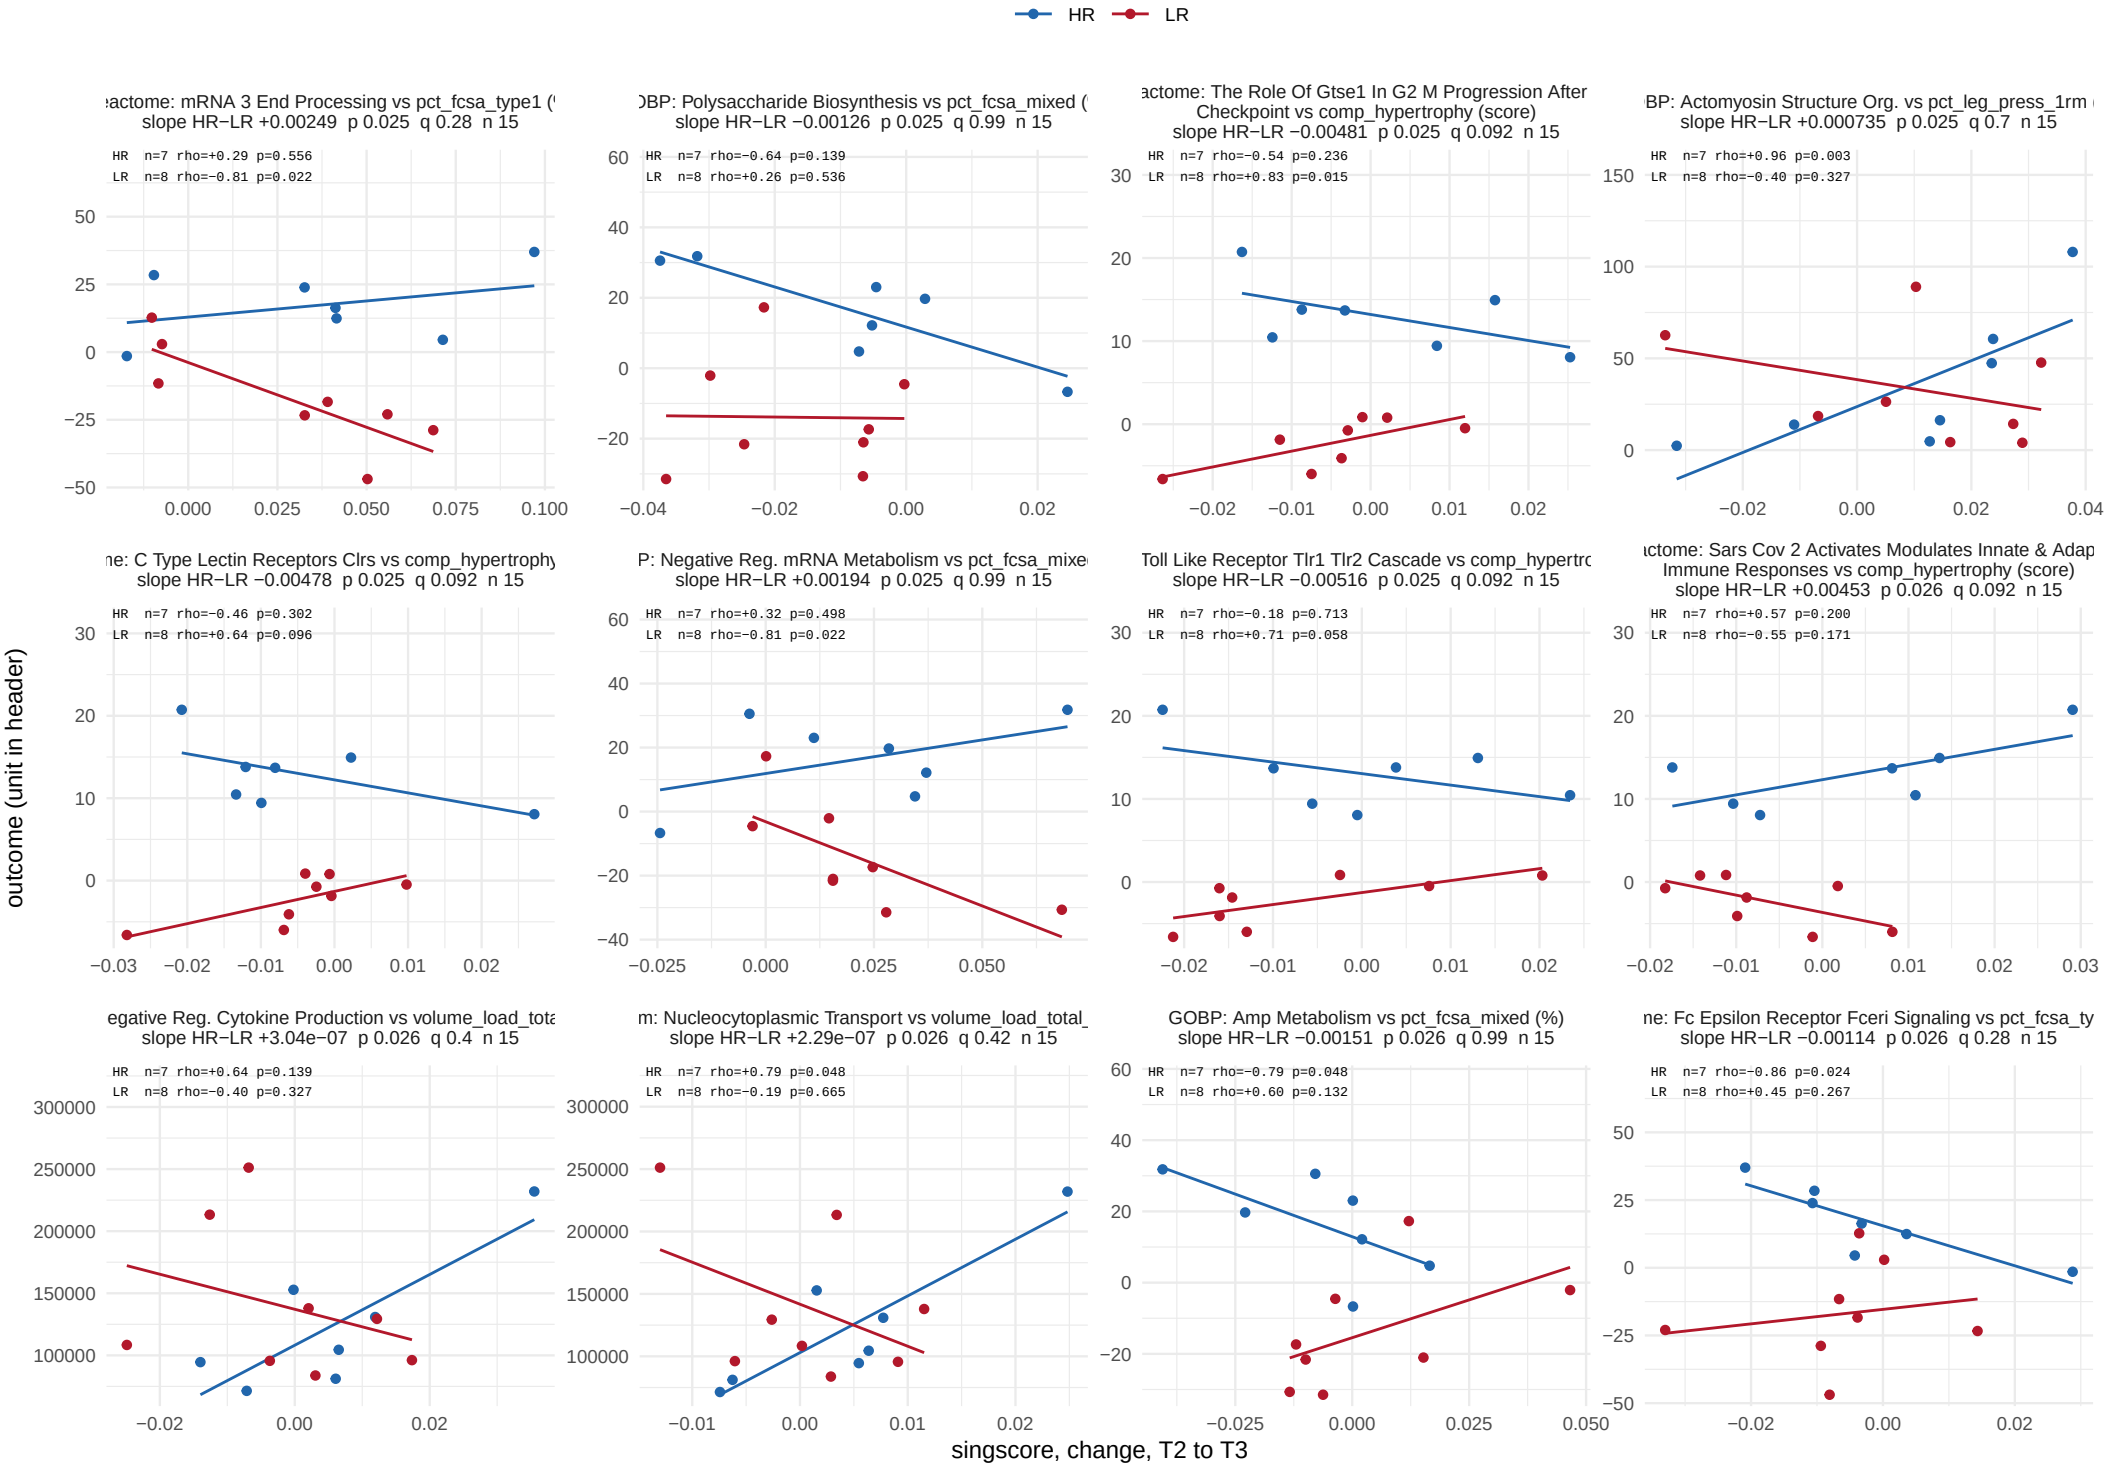


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, acute window


643 of 11024 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 27 of 54.

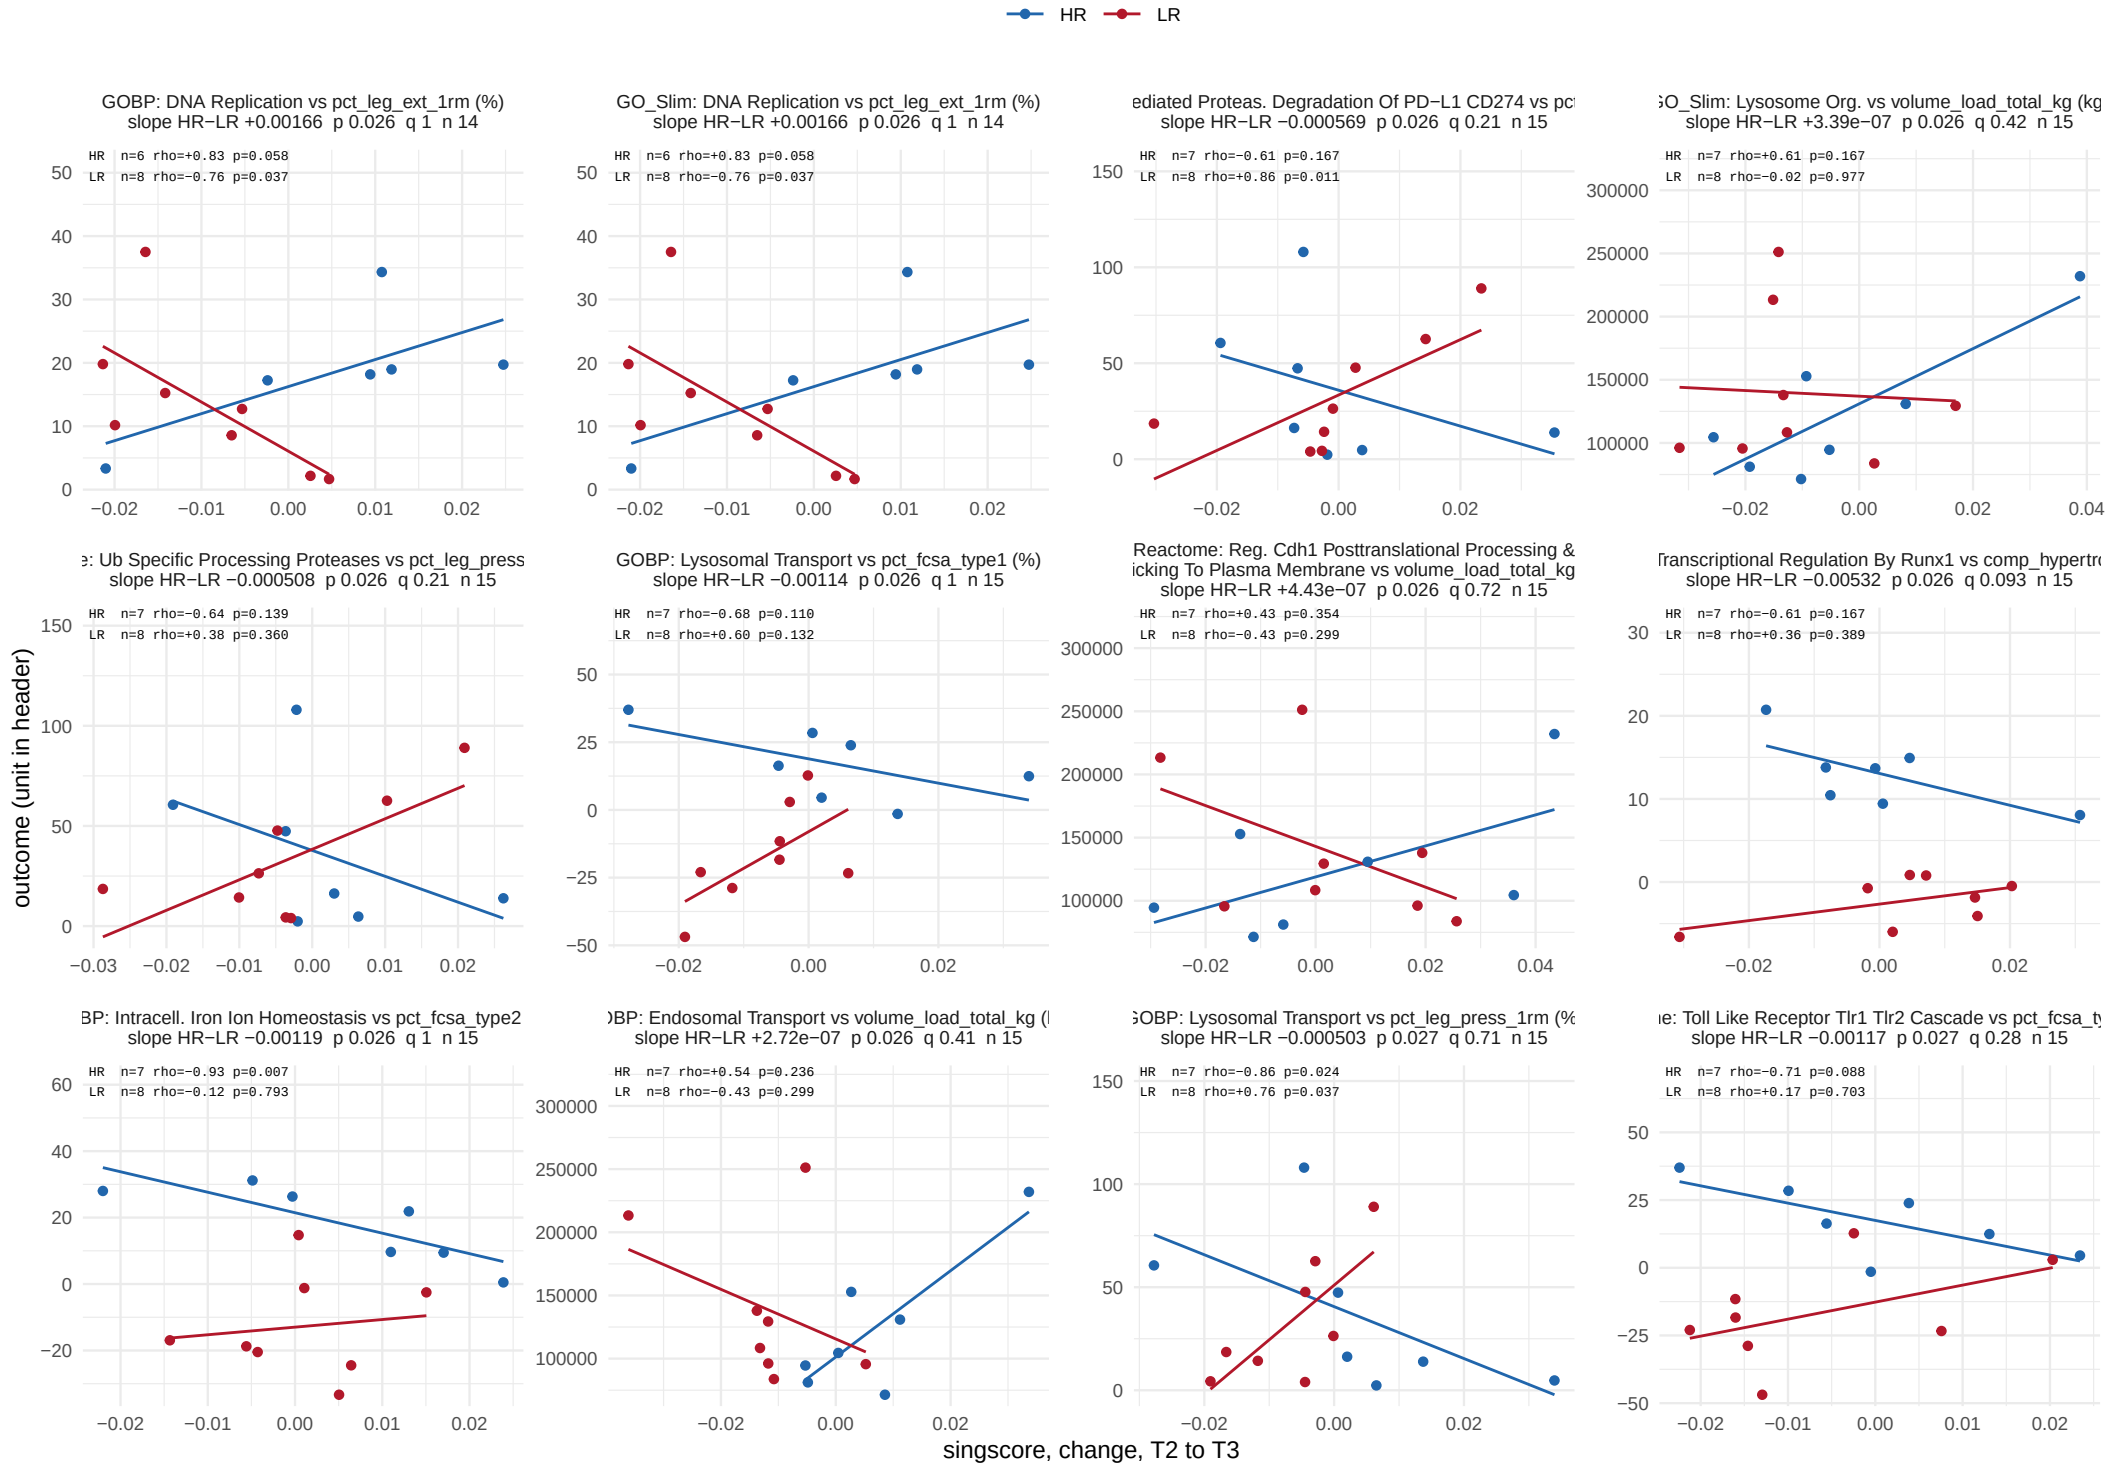


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, acute window


643 of 11024 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 28 of 54.

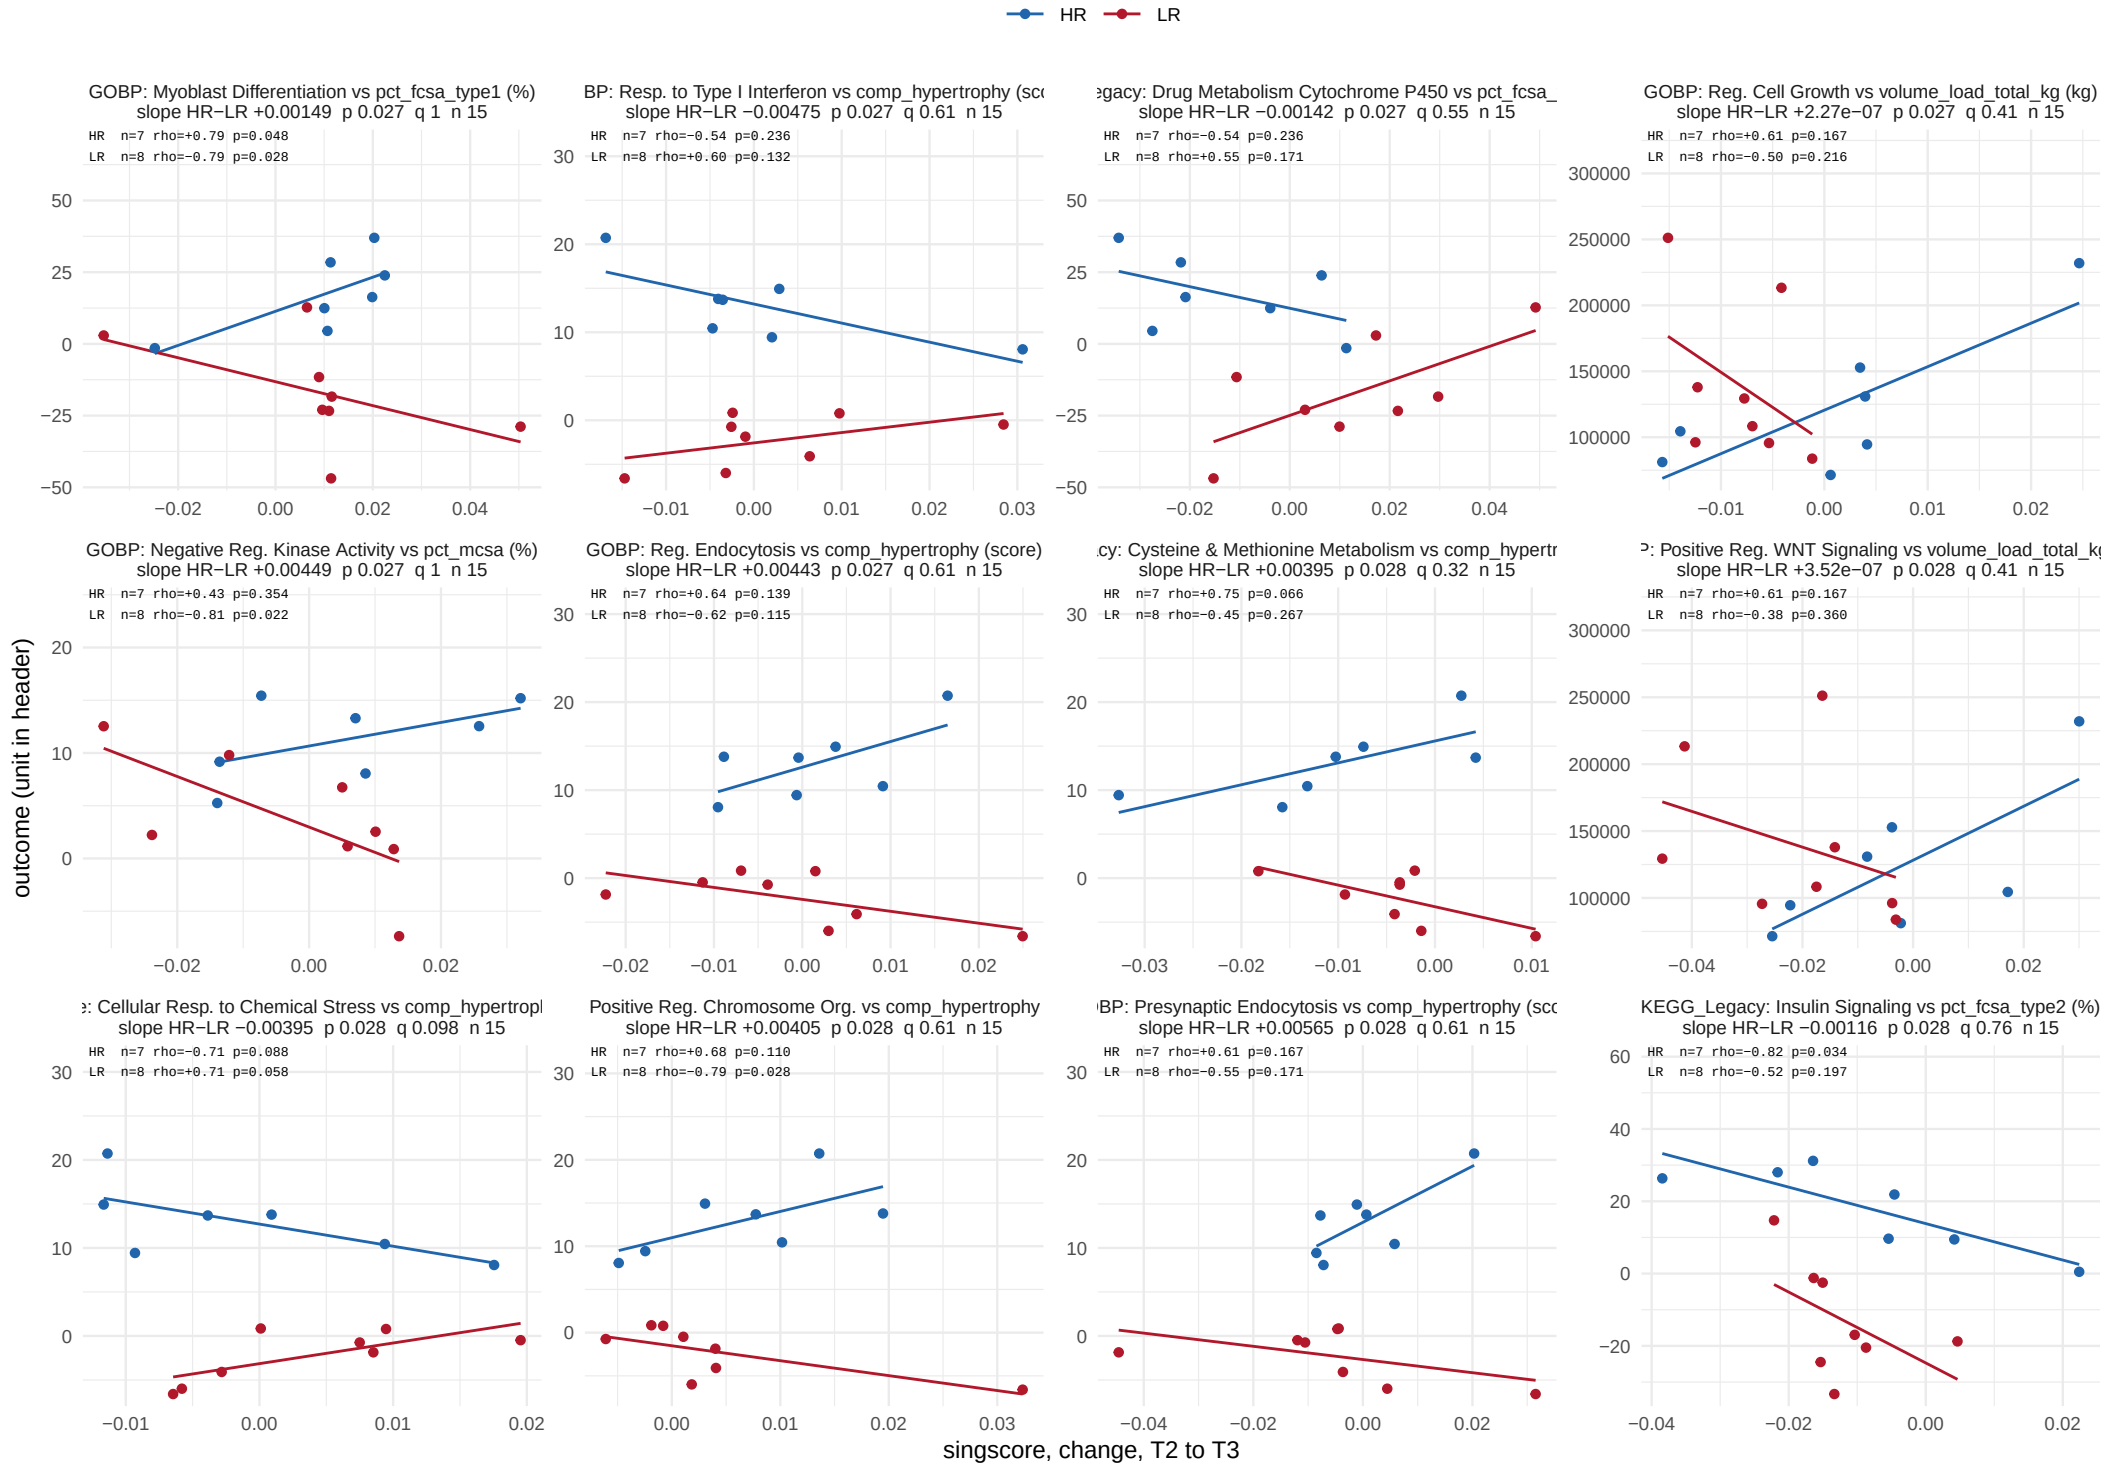


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, acute window


643 of 11024 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 29 of 54.

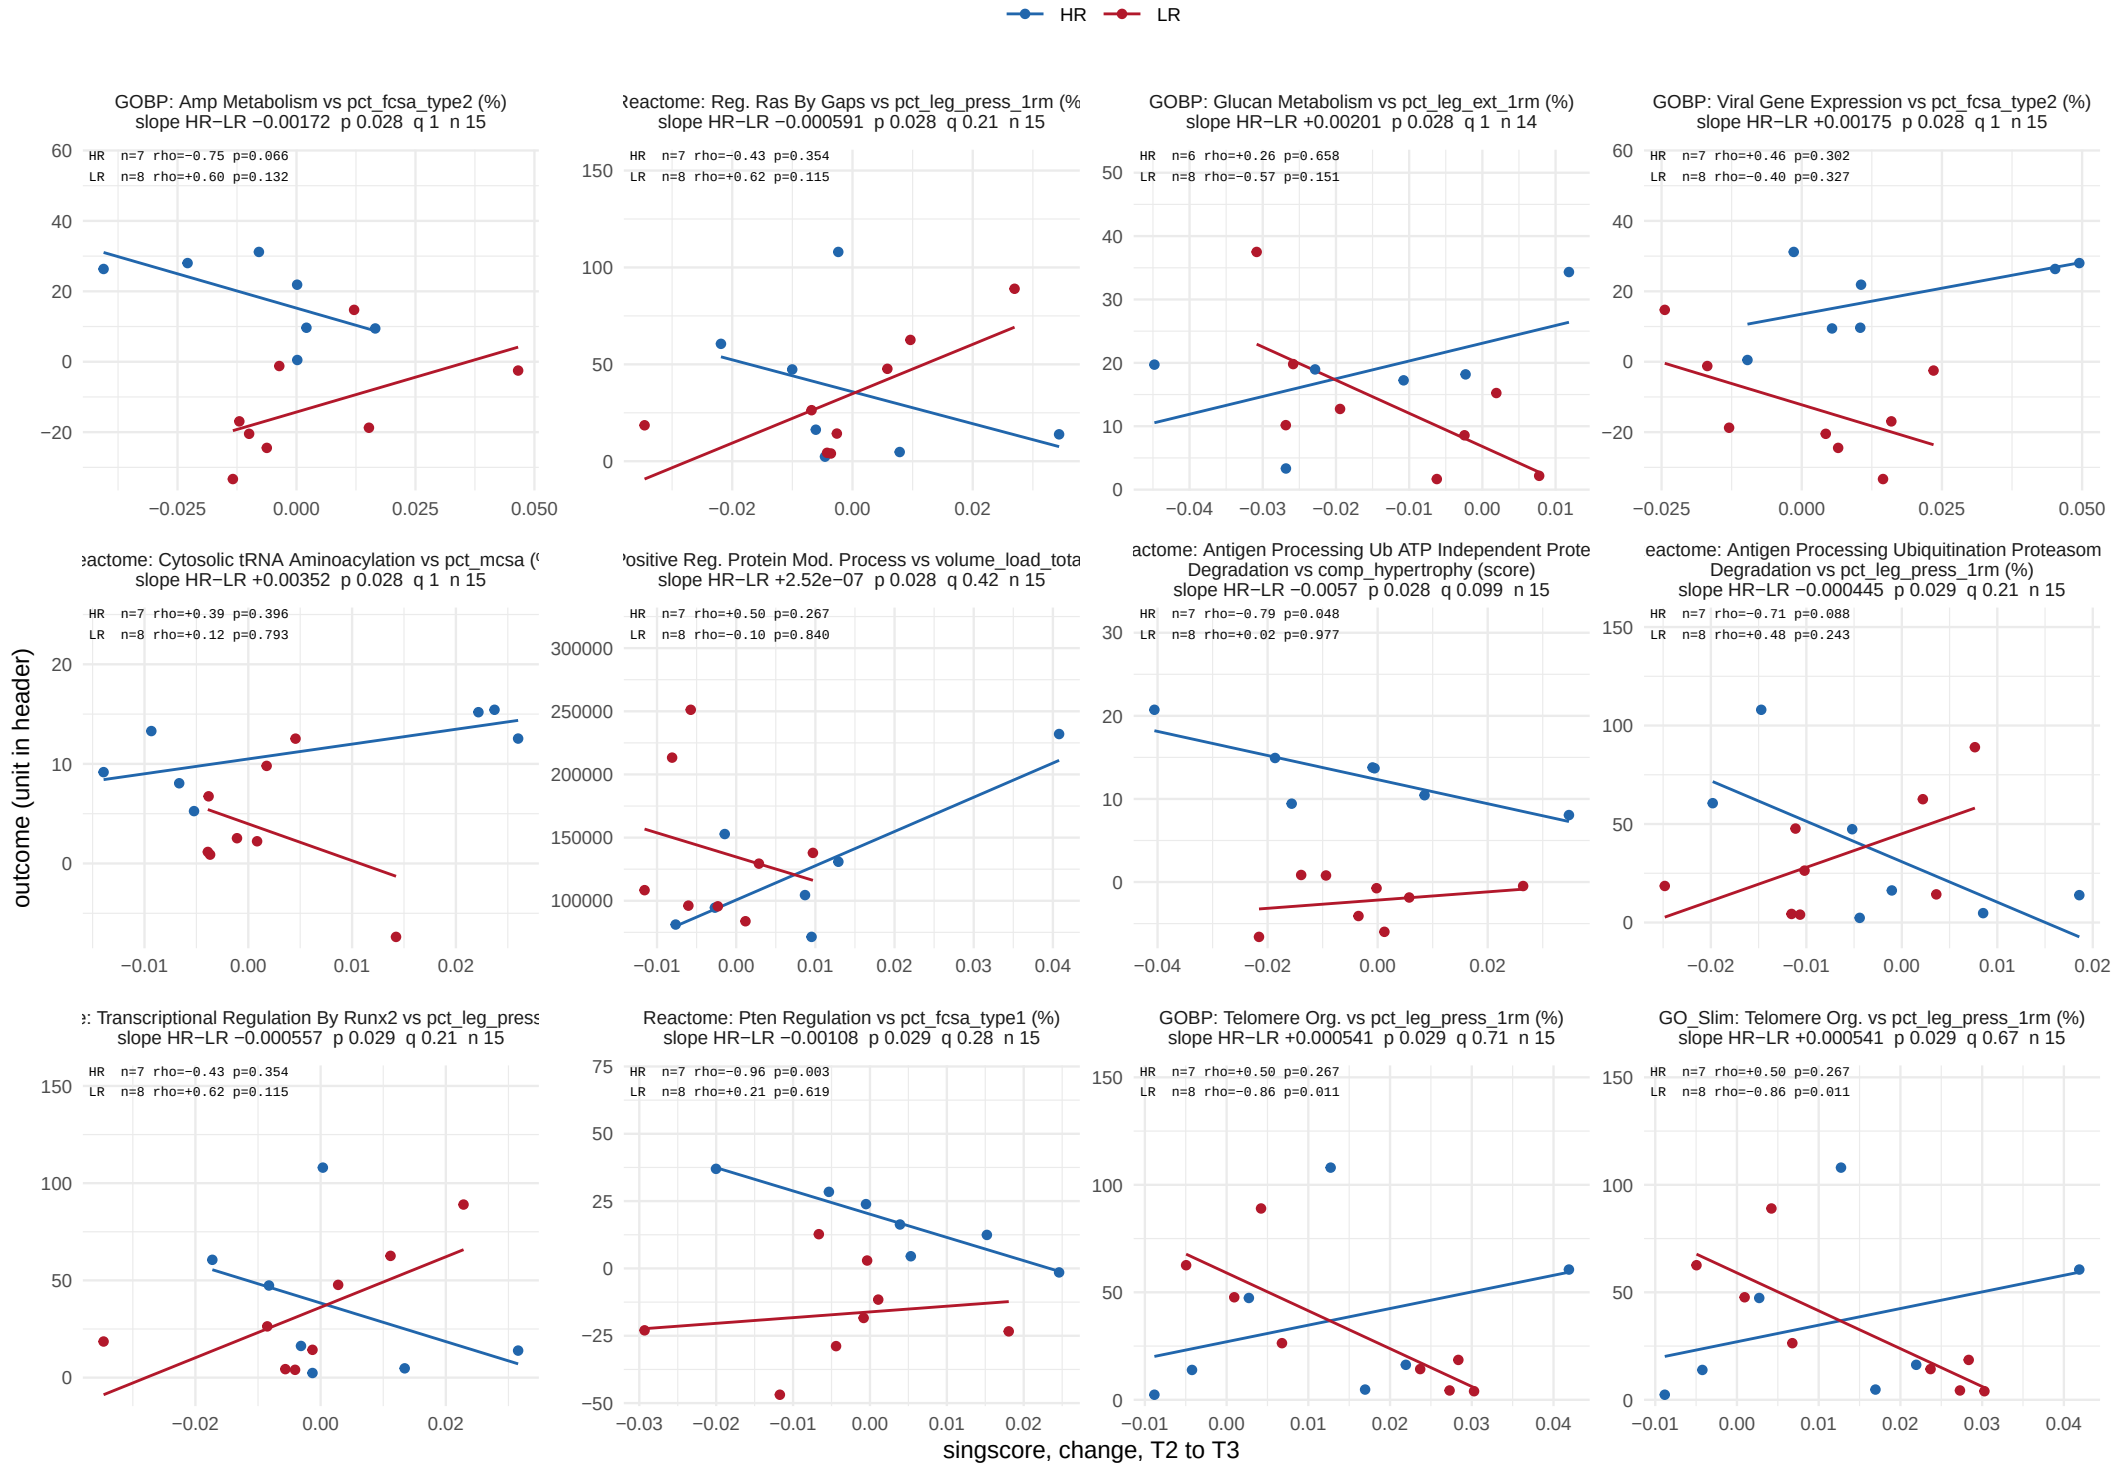


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, acute window


643 of 11024 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 30 of 54.

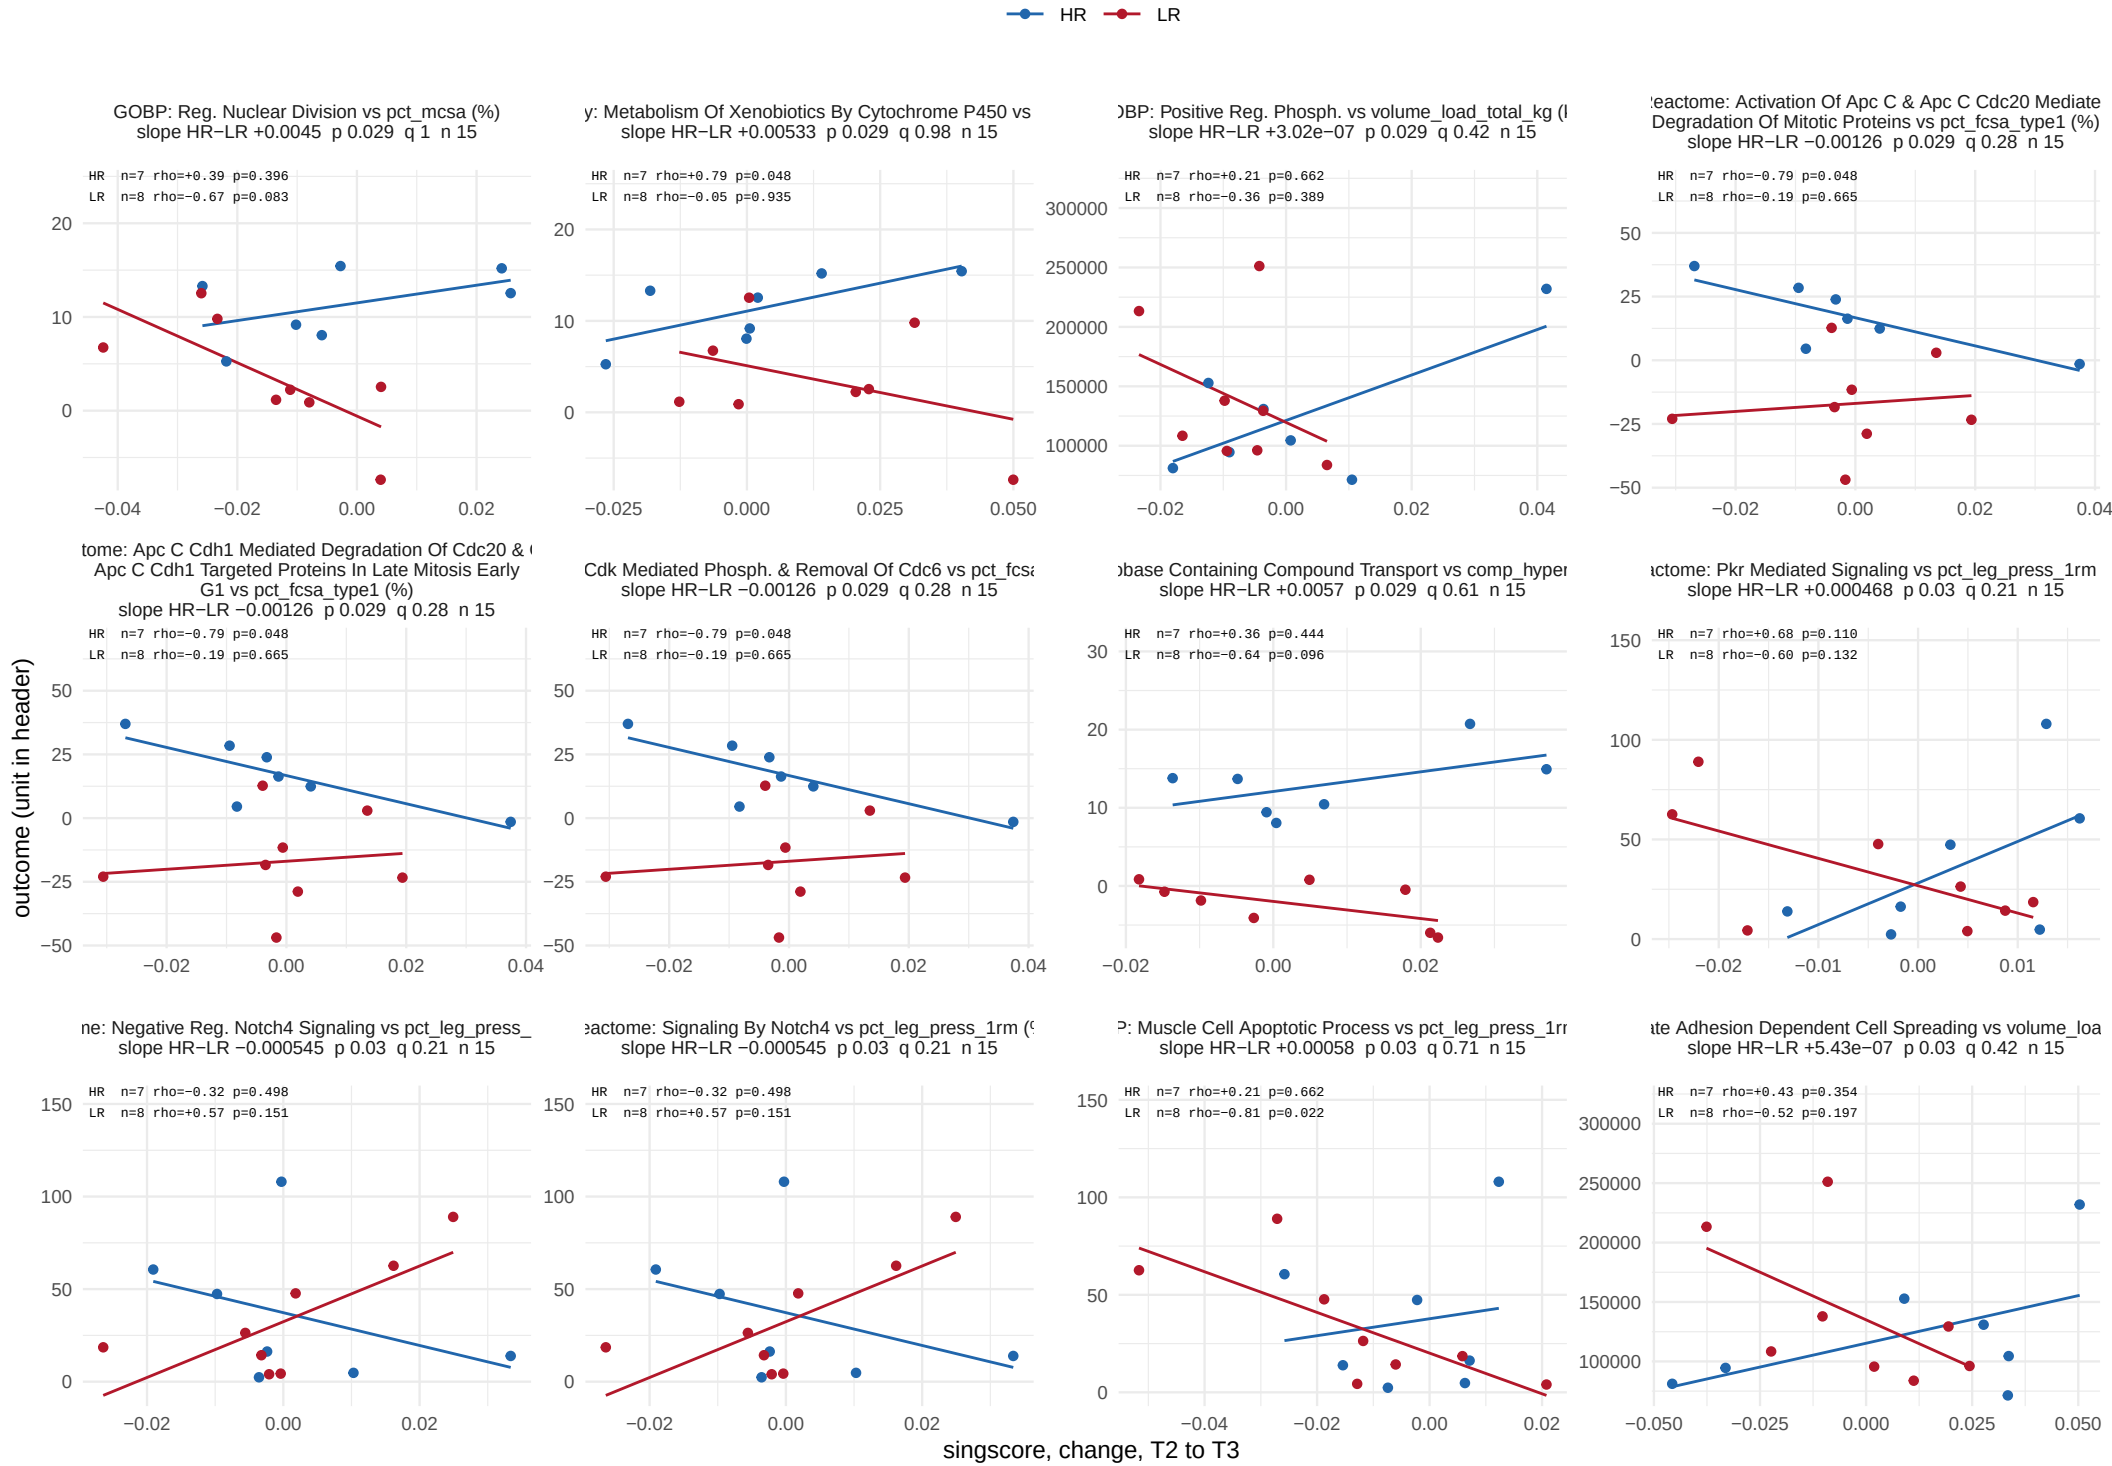


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, acute window


643 of 11024 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 31 of 54.

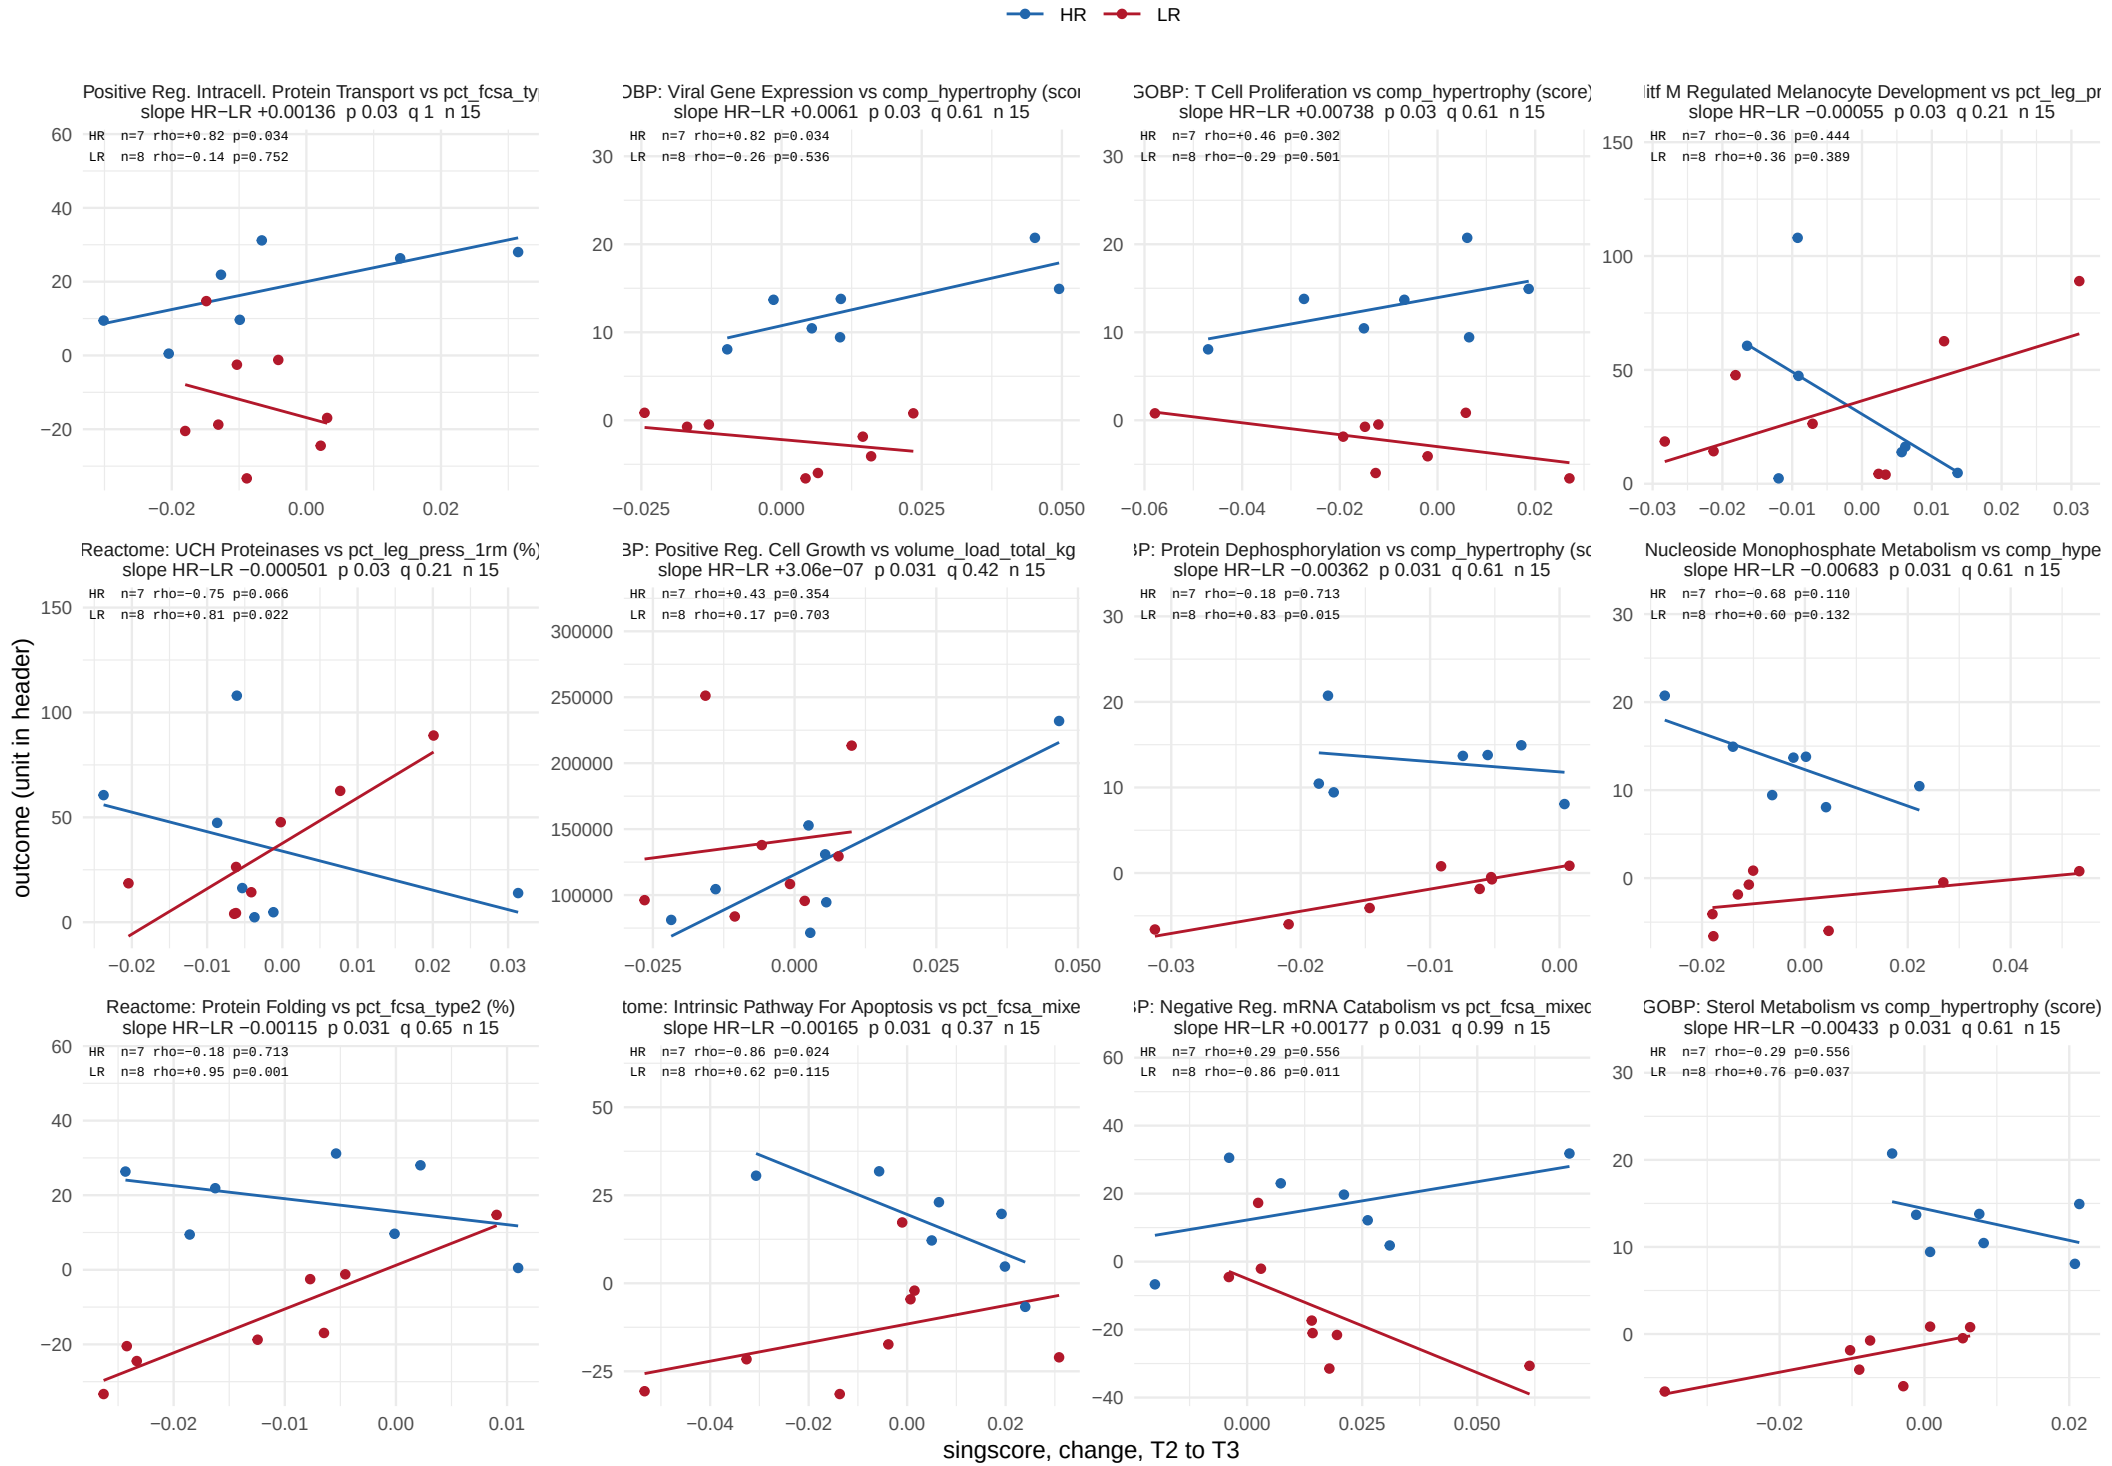


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, acute window


643 of 11024 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 32 of 54.

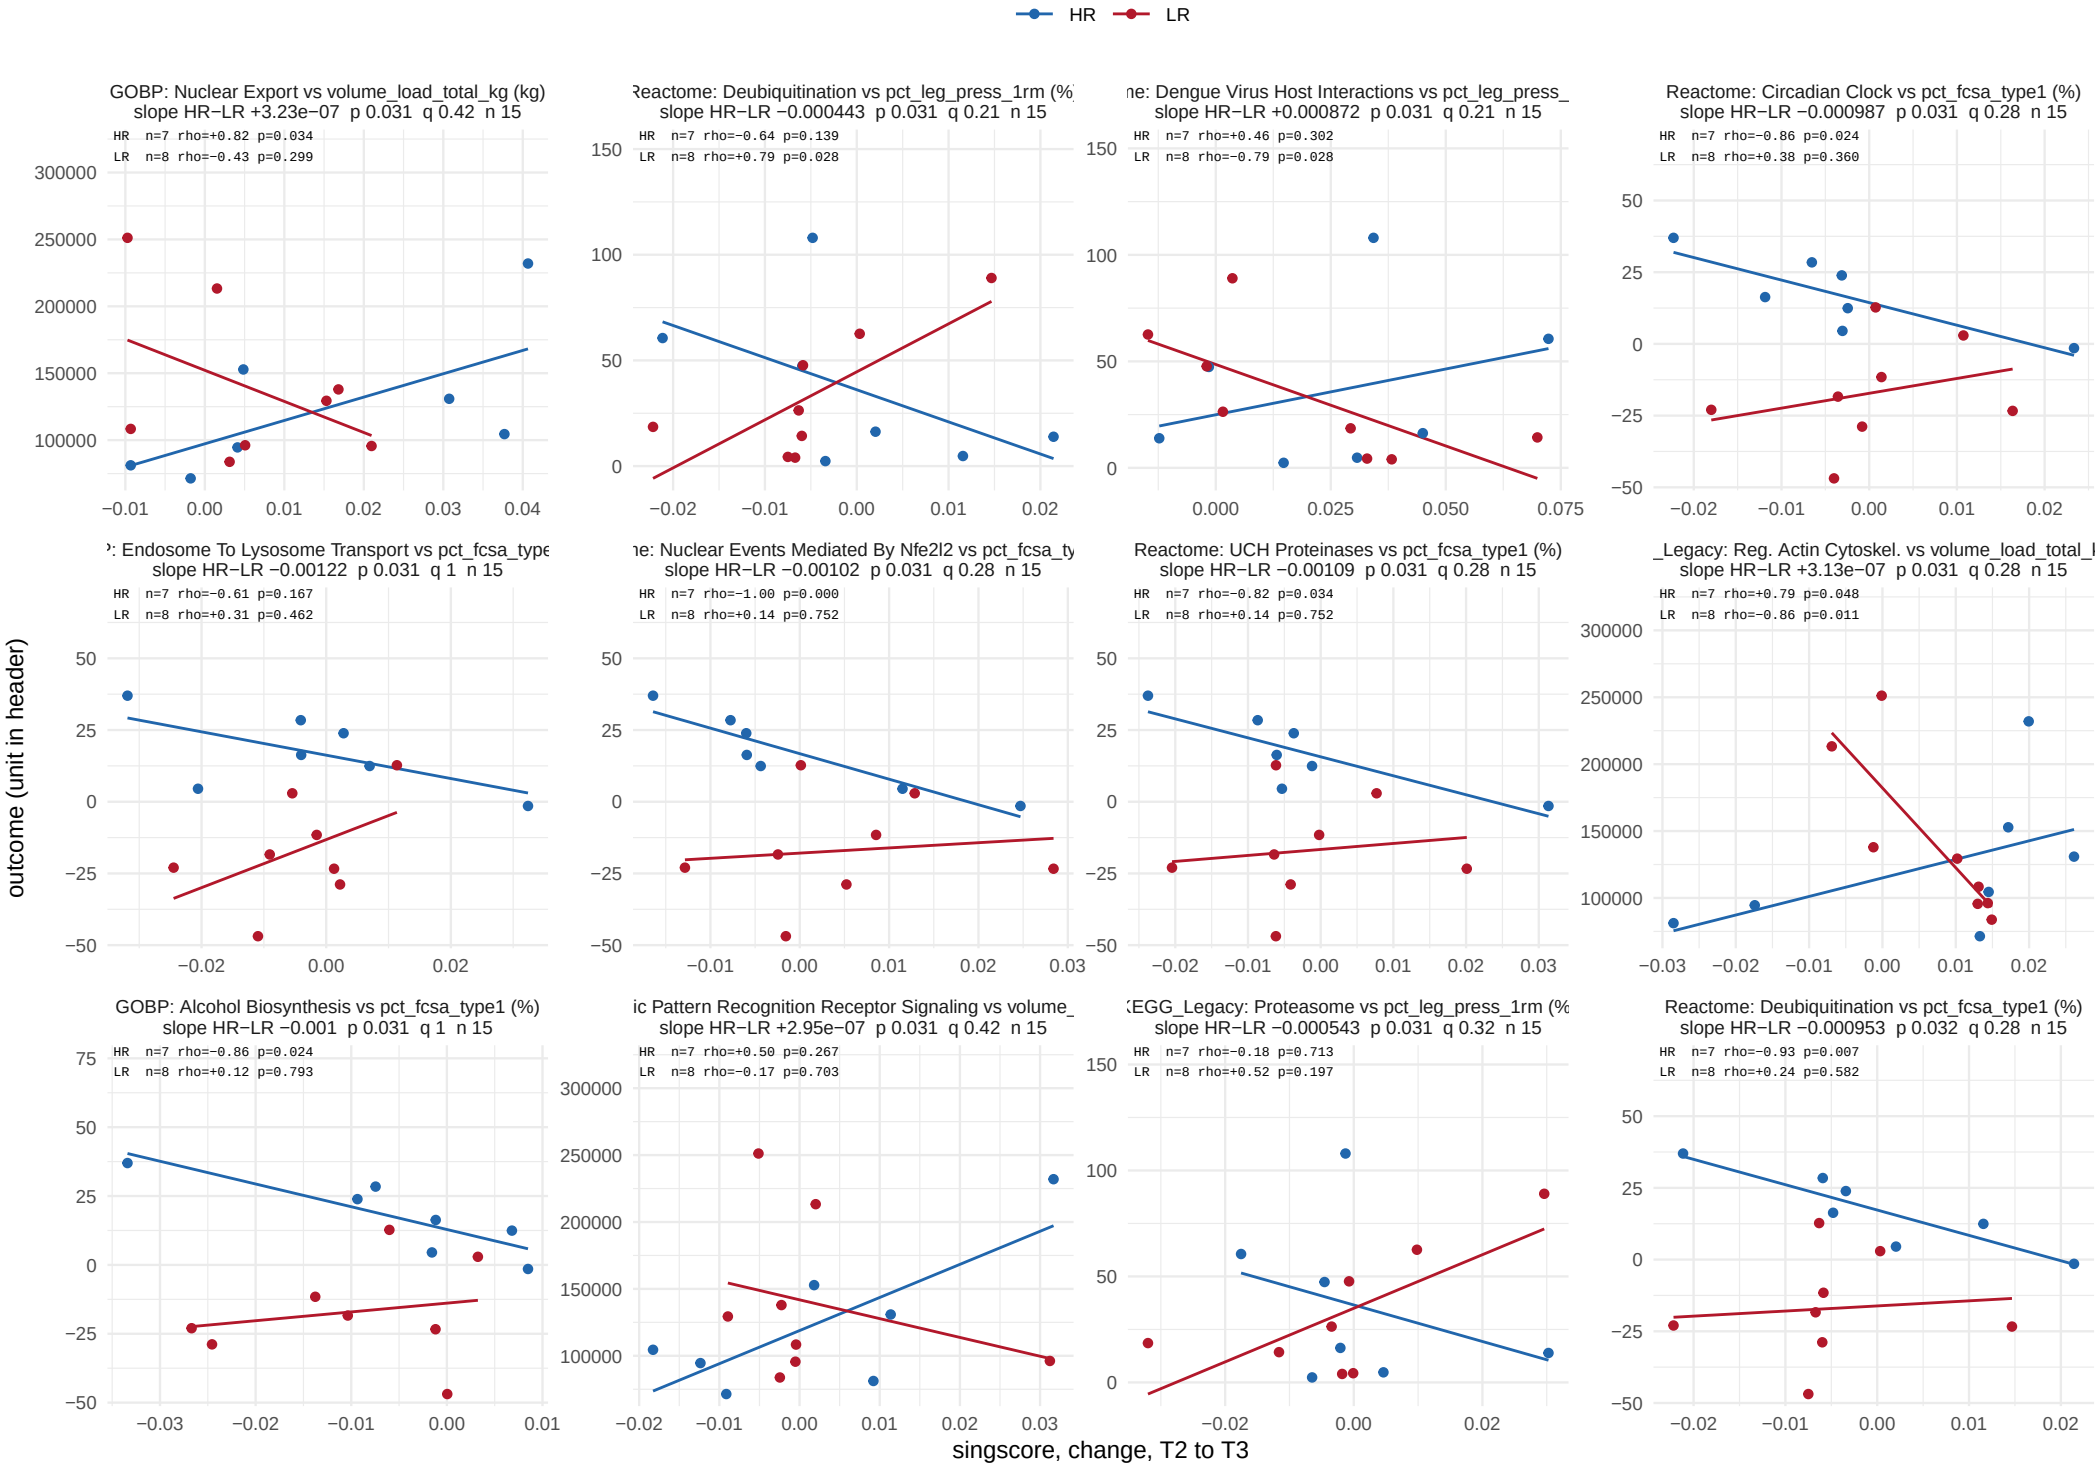


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, acute window


643 of 11024 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 33 of 54.

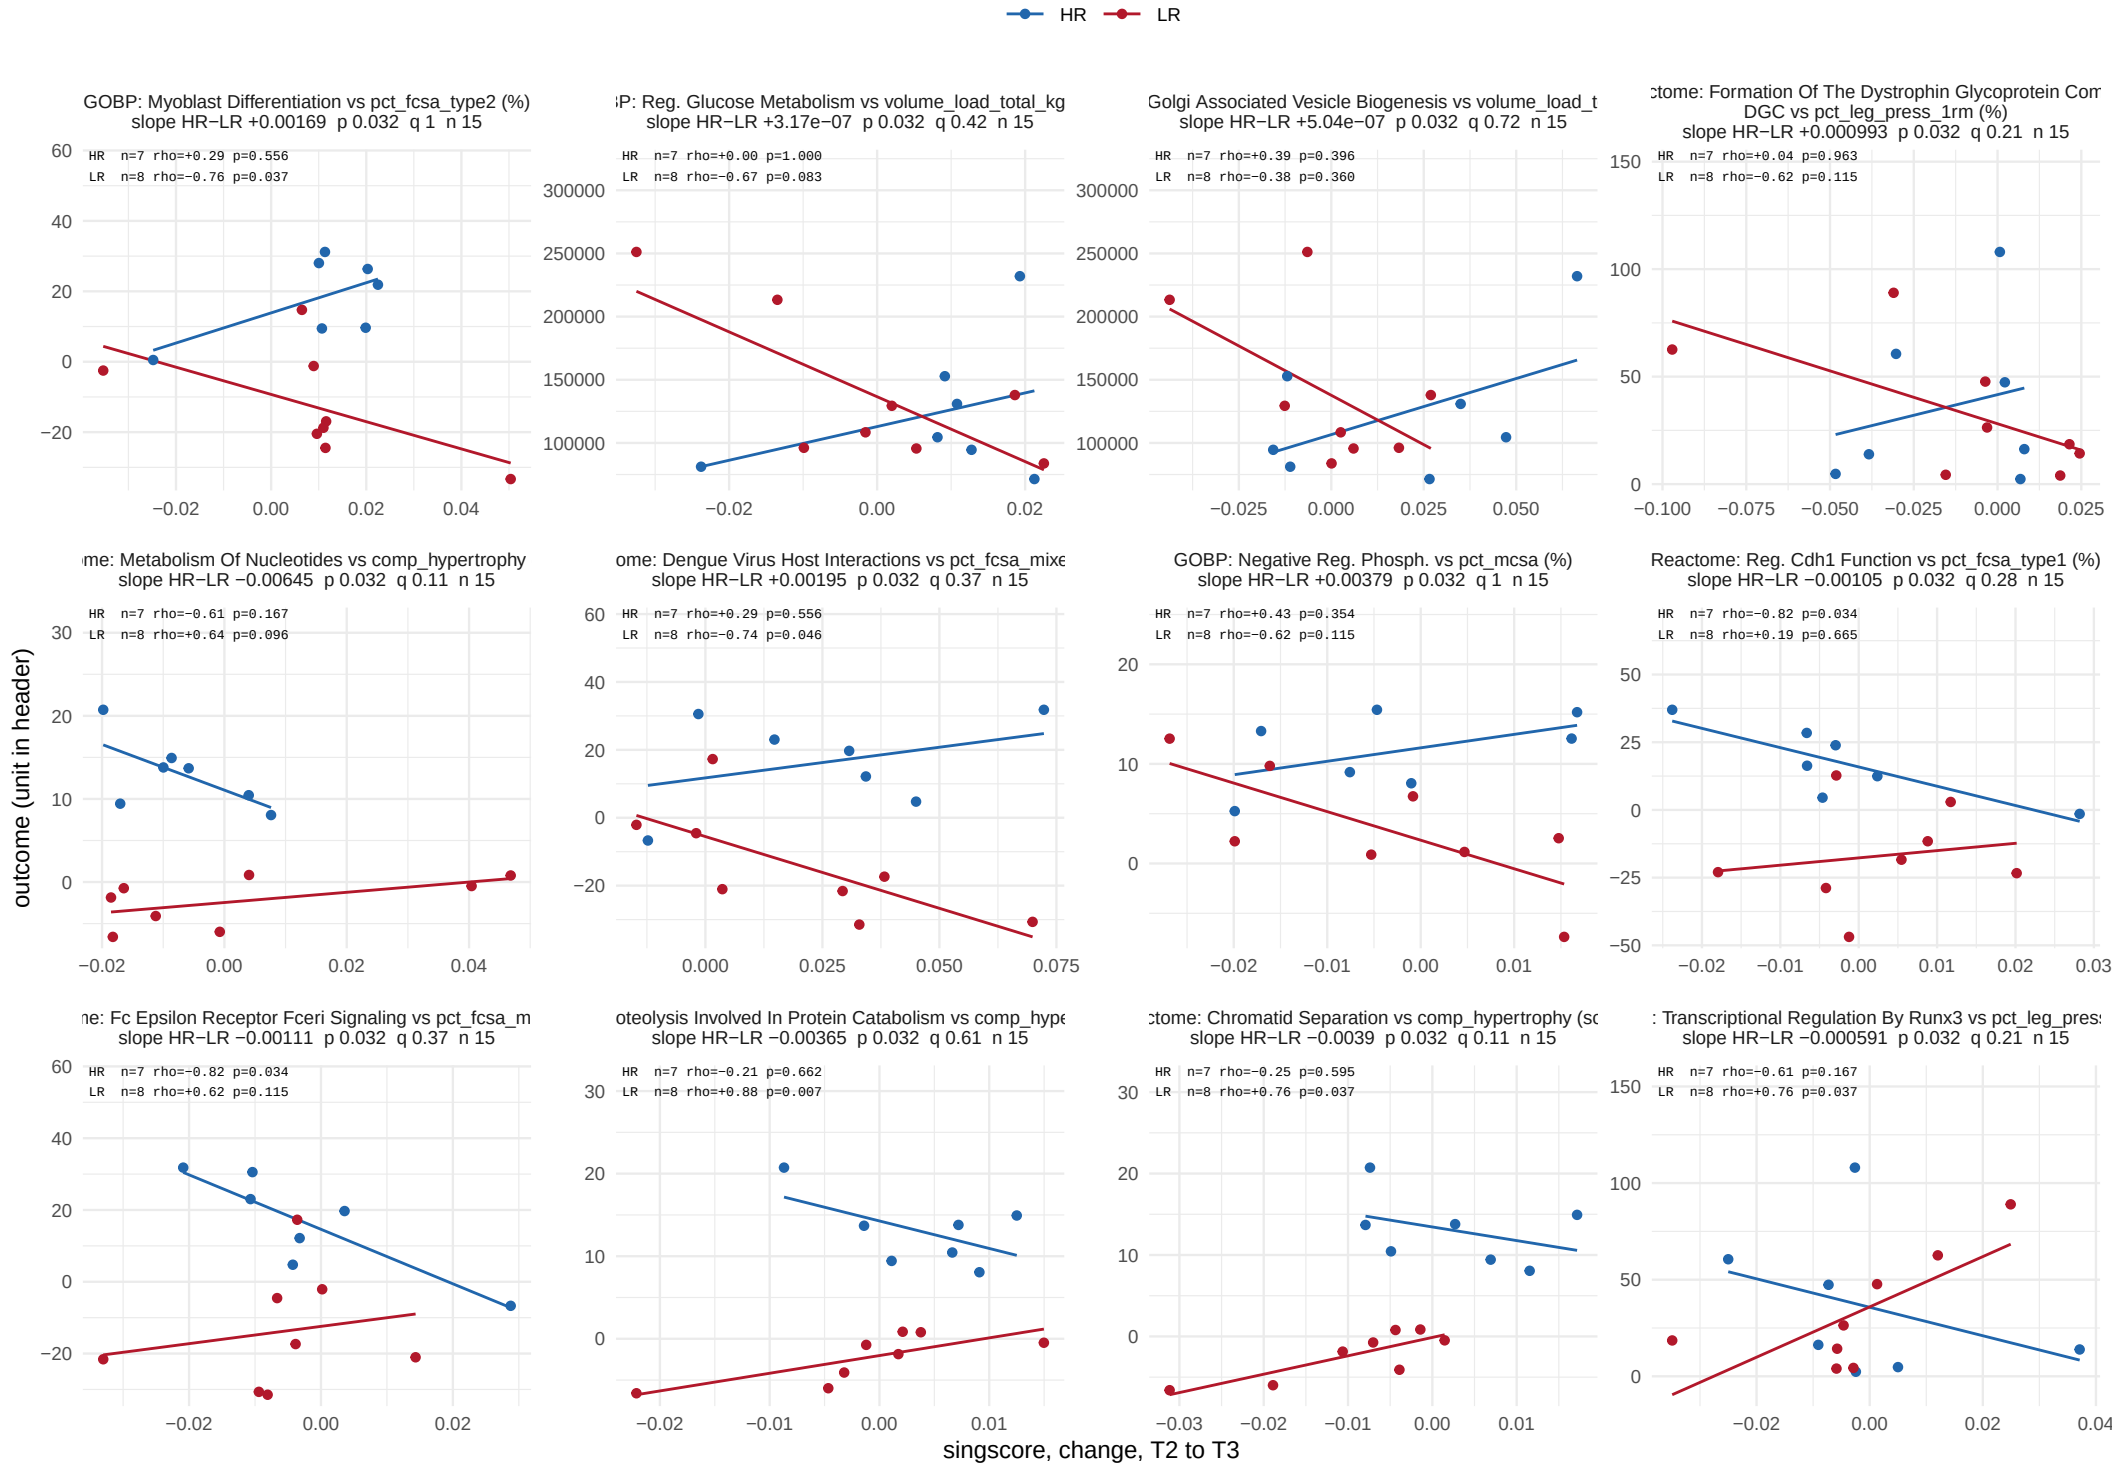


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, acute window


643 of 11024 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 34 of 54.

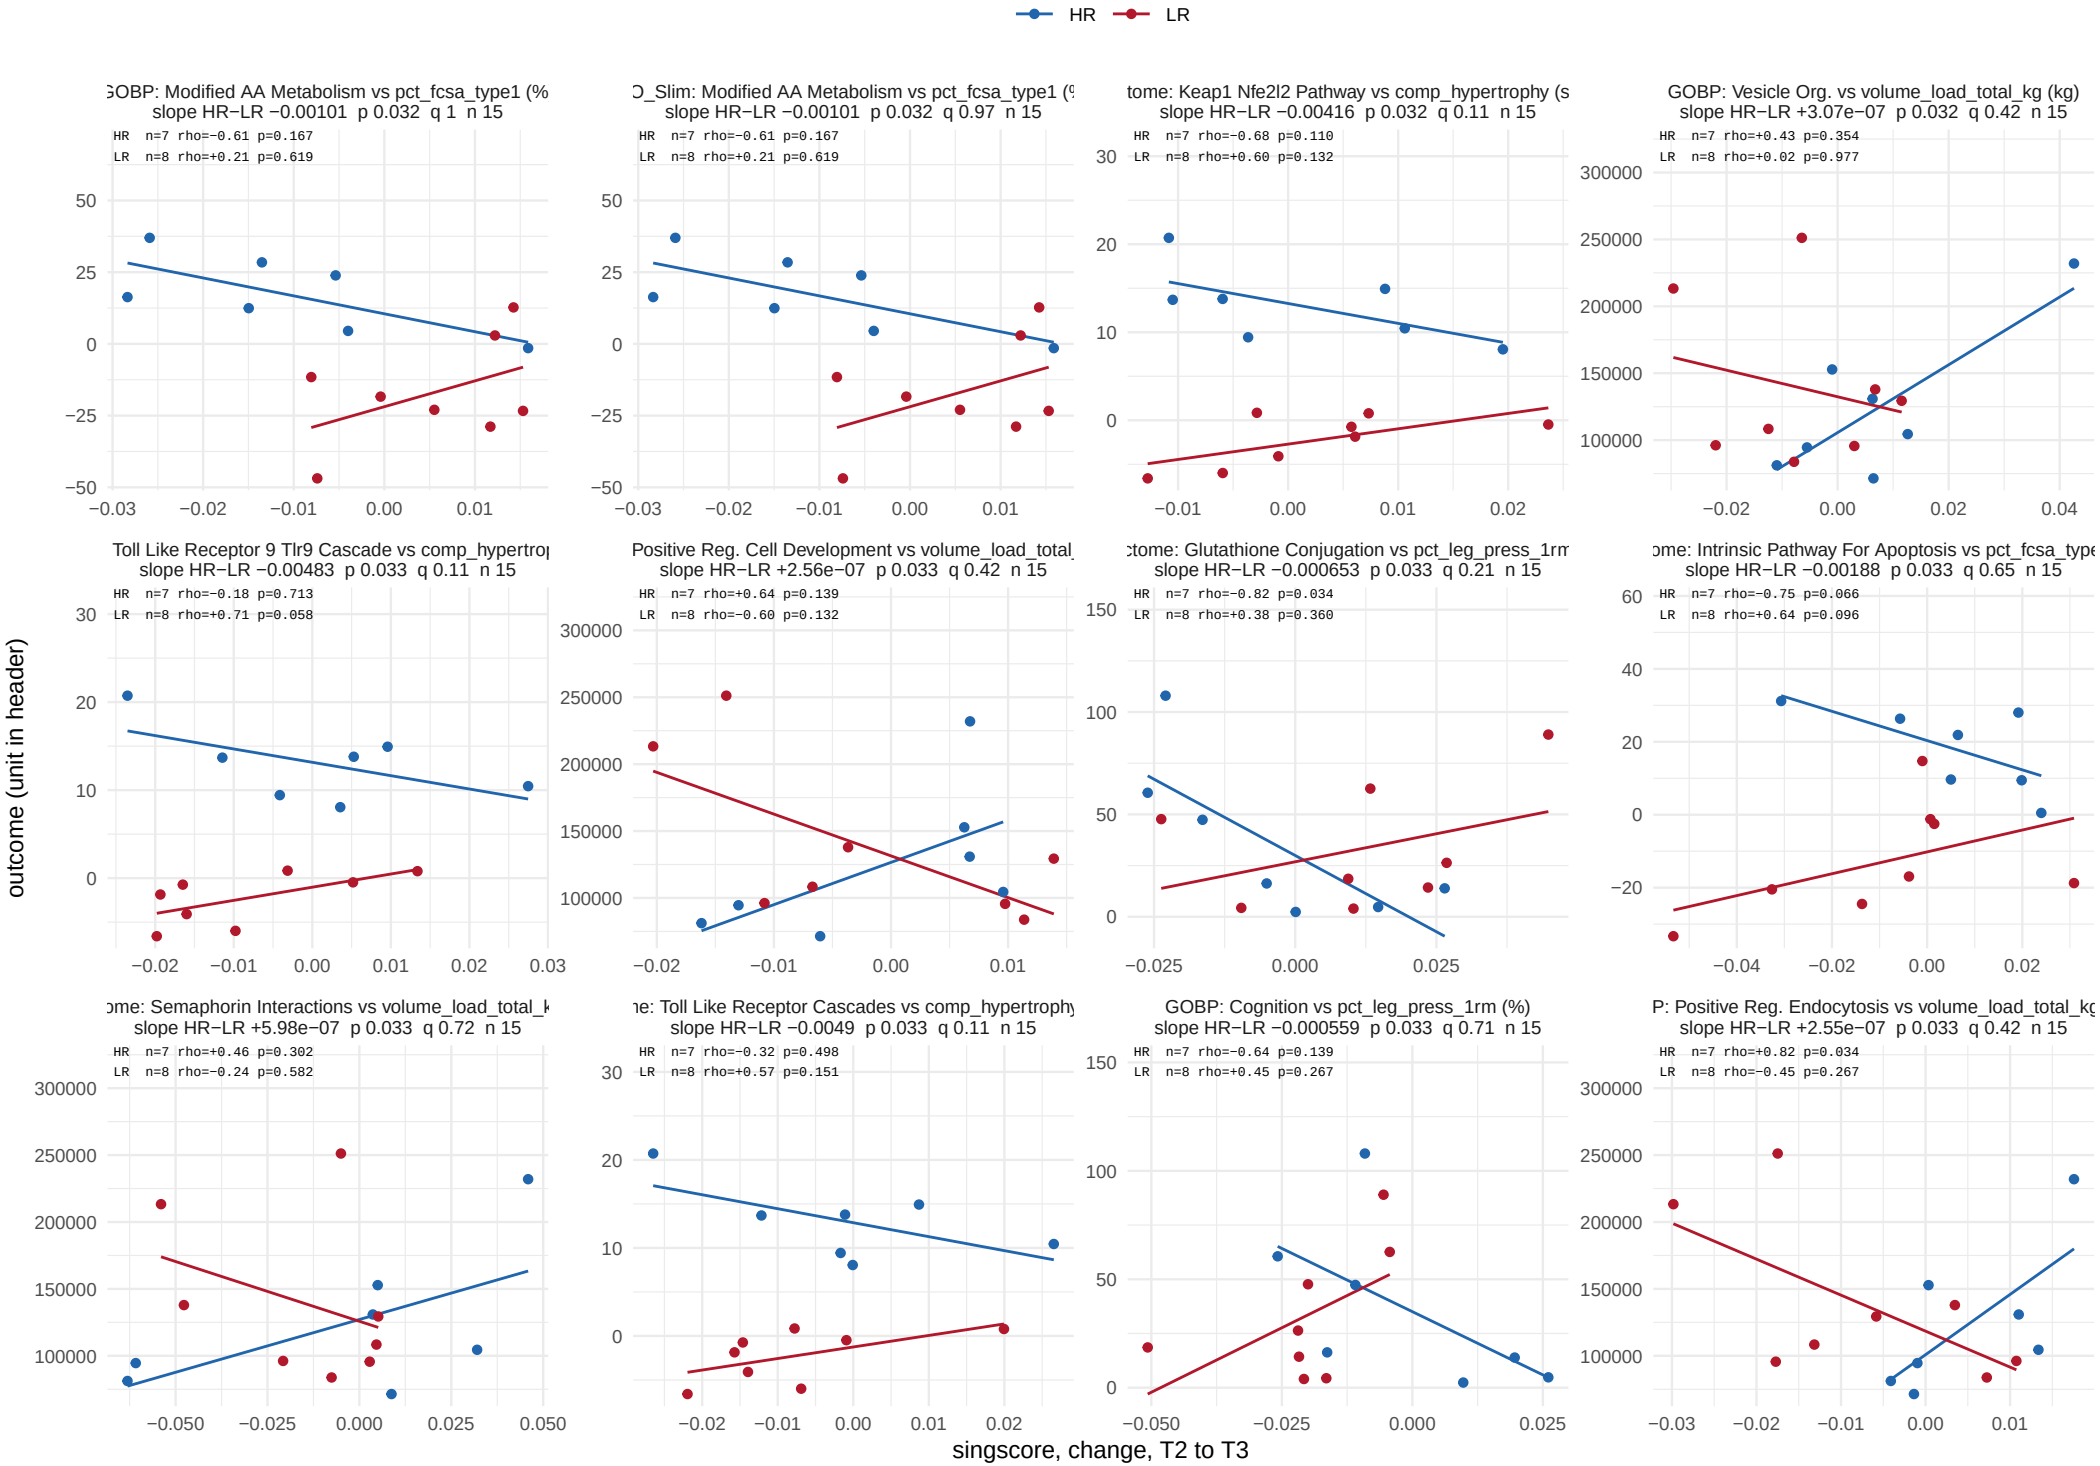


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

# Arm difference, acute window


643 of 11024 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 35 of 54.

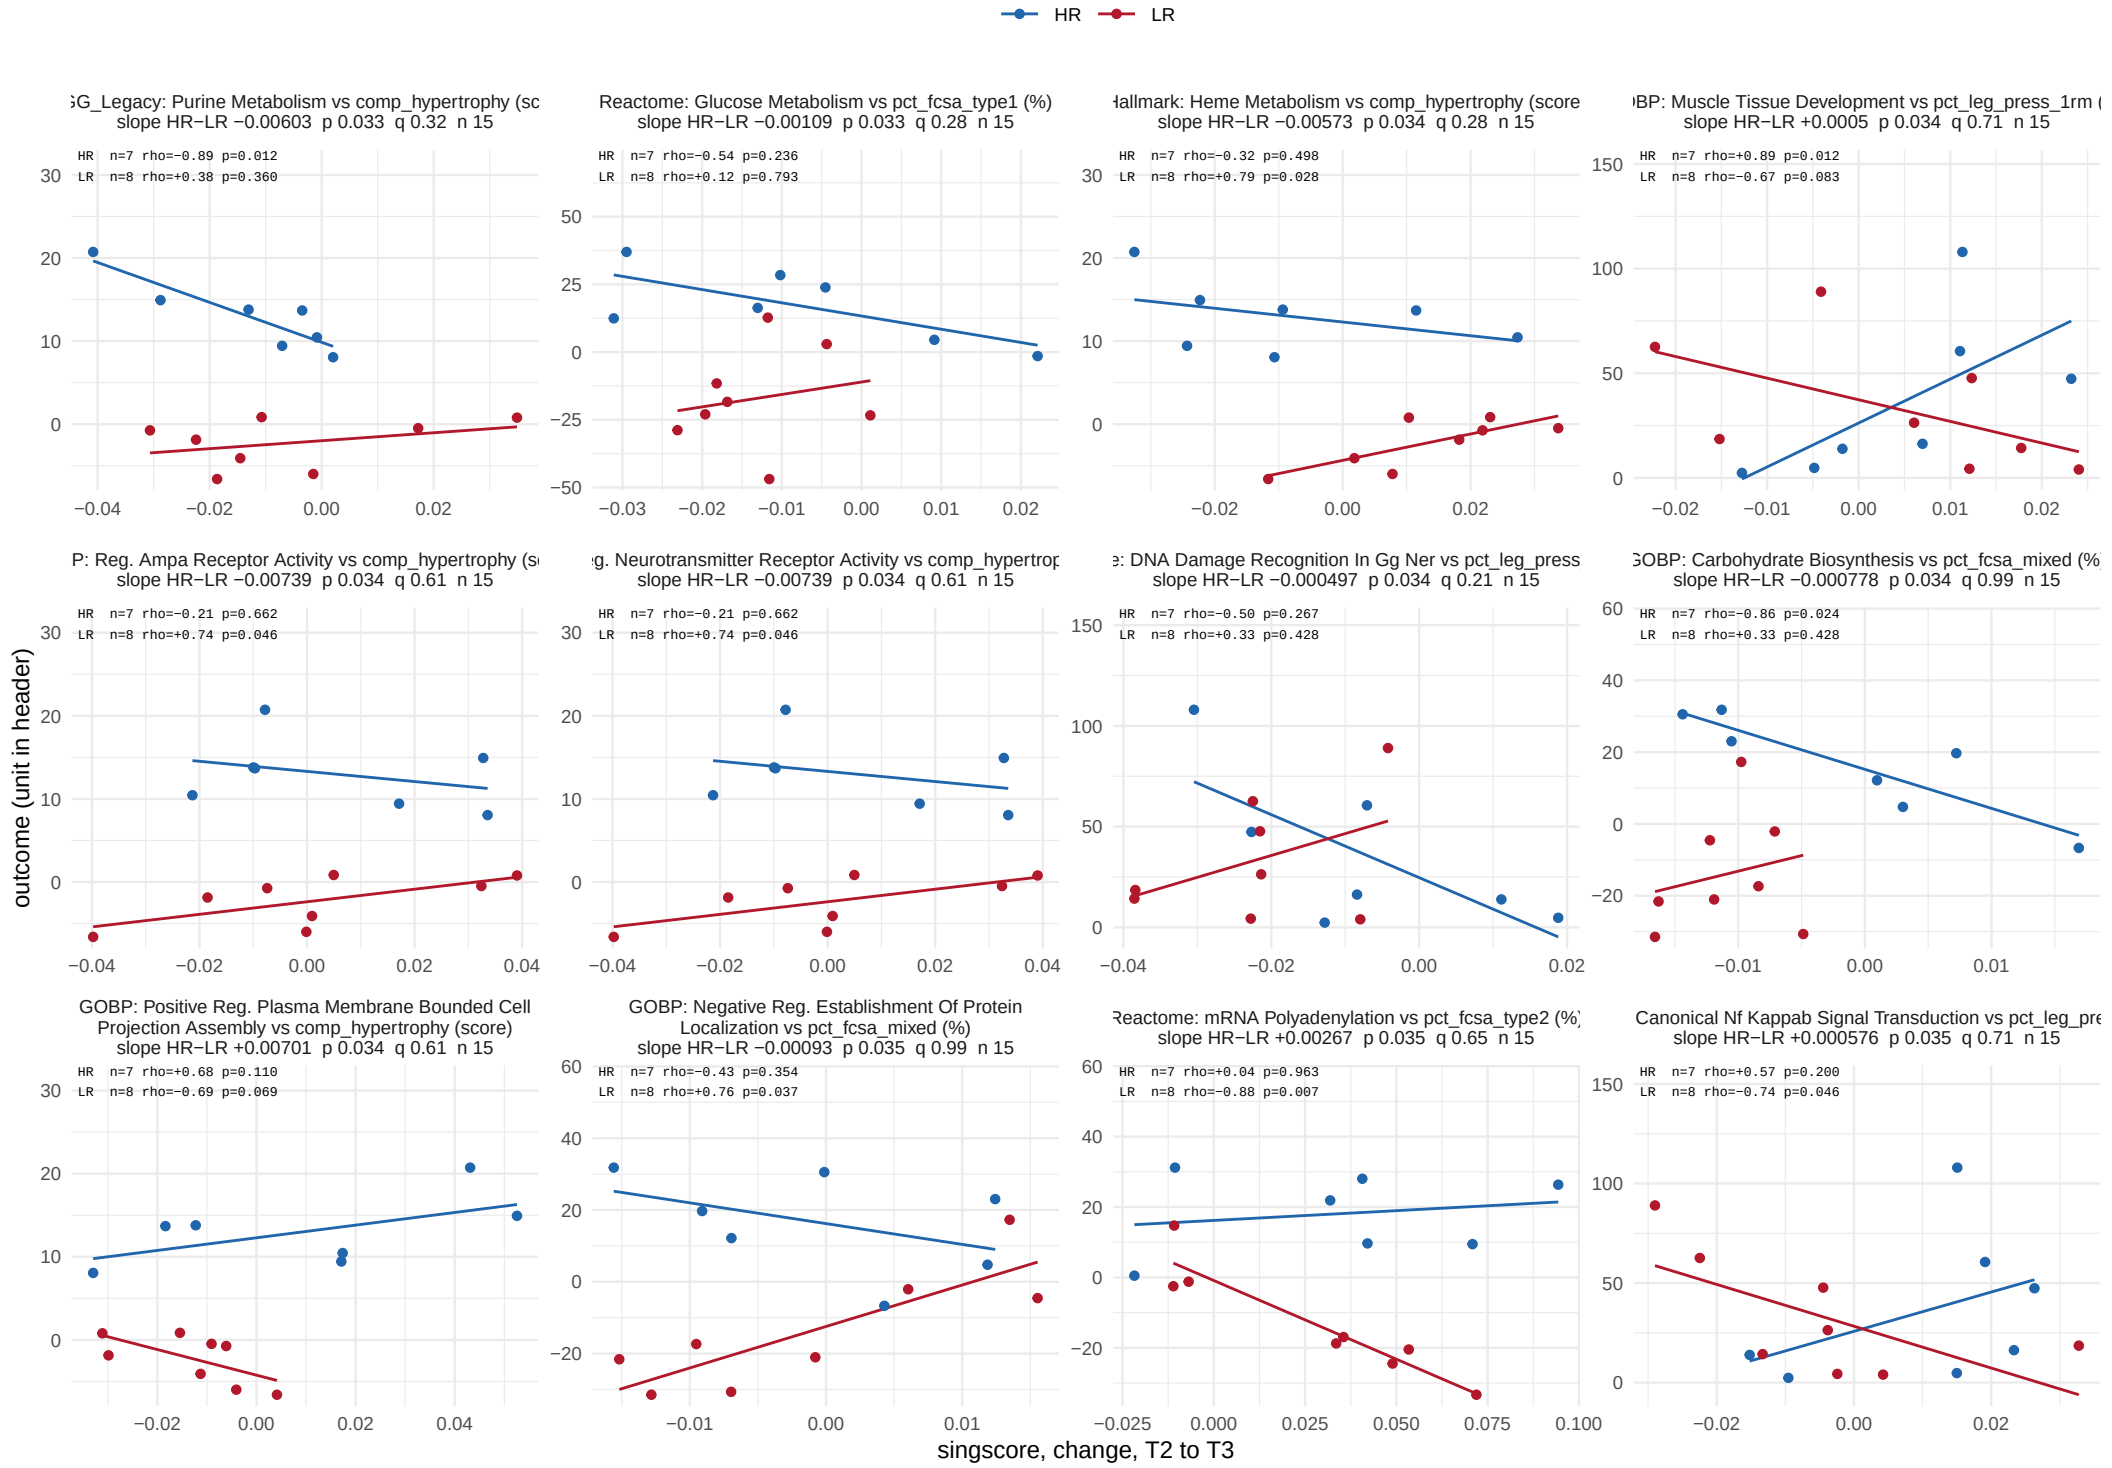


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, acute window


643 of 11024 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 36 of 54.

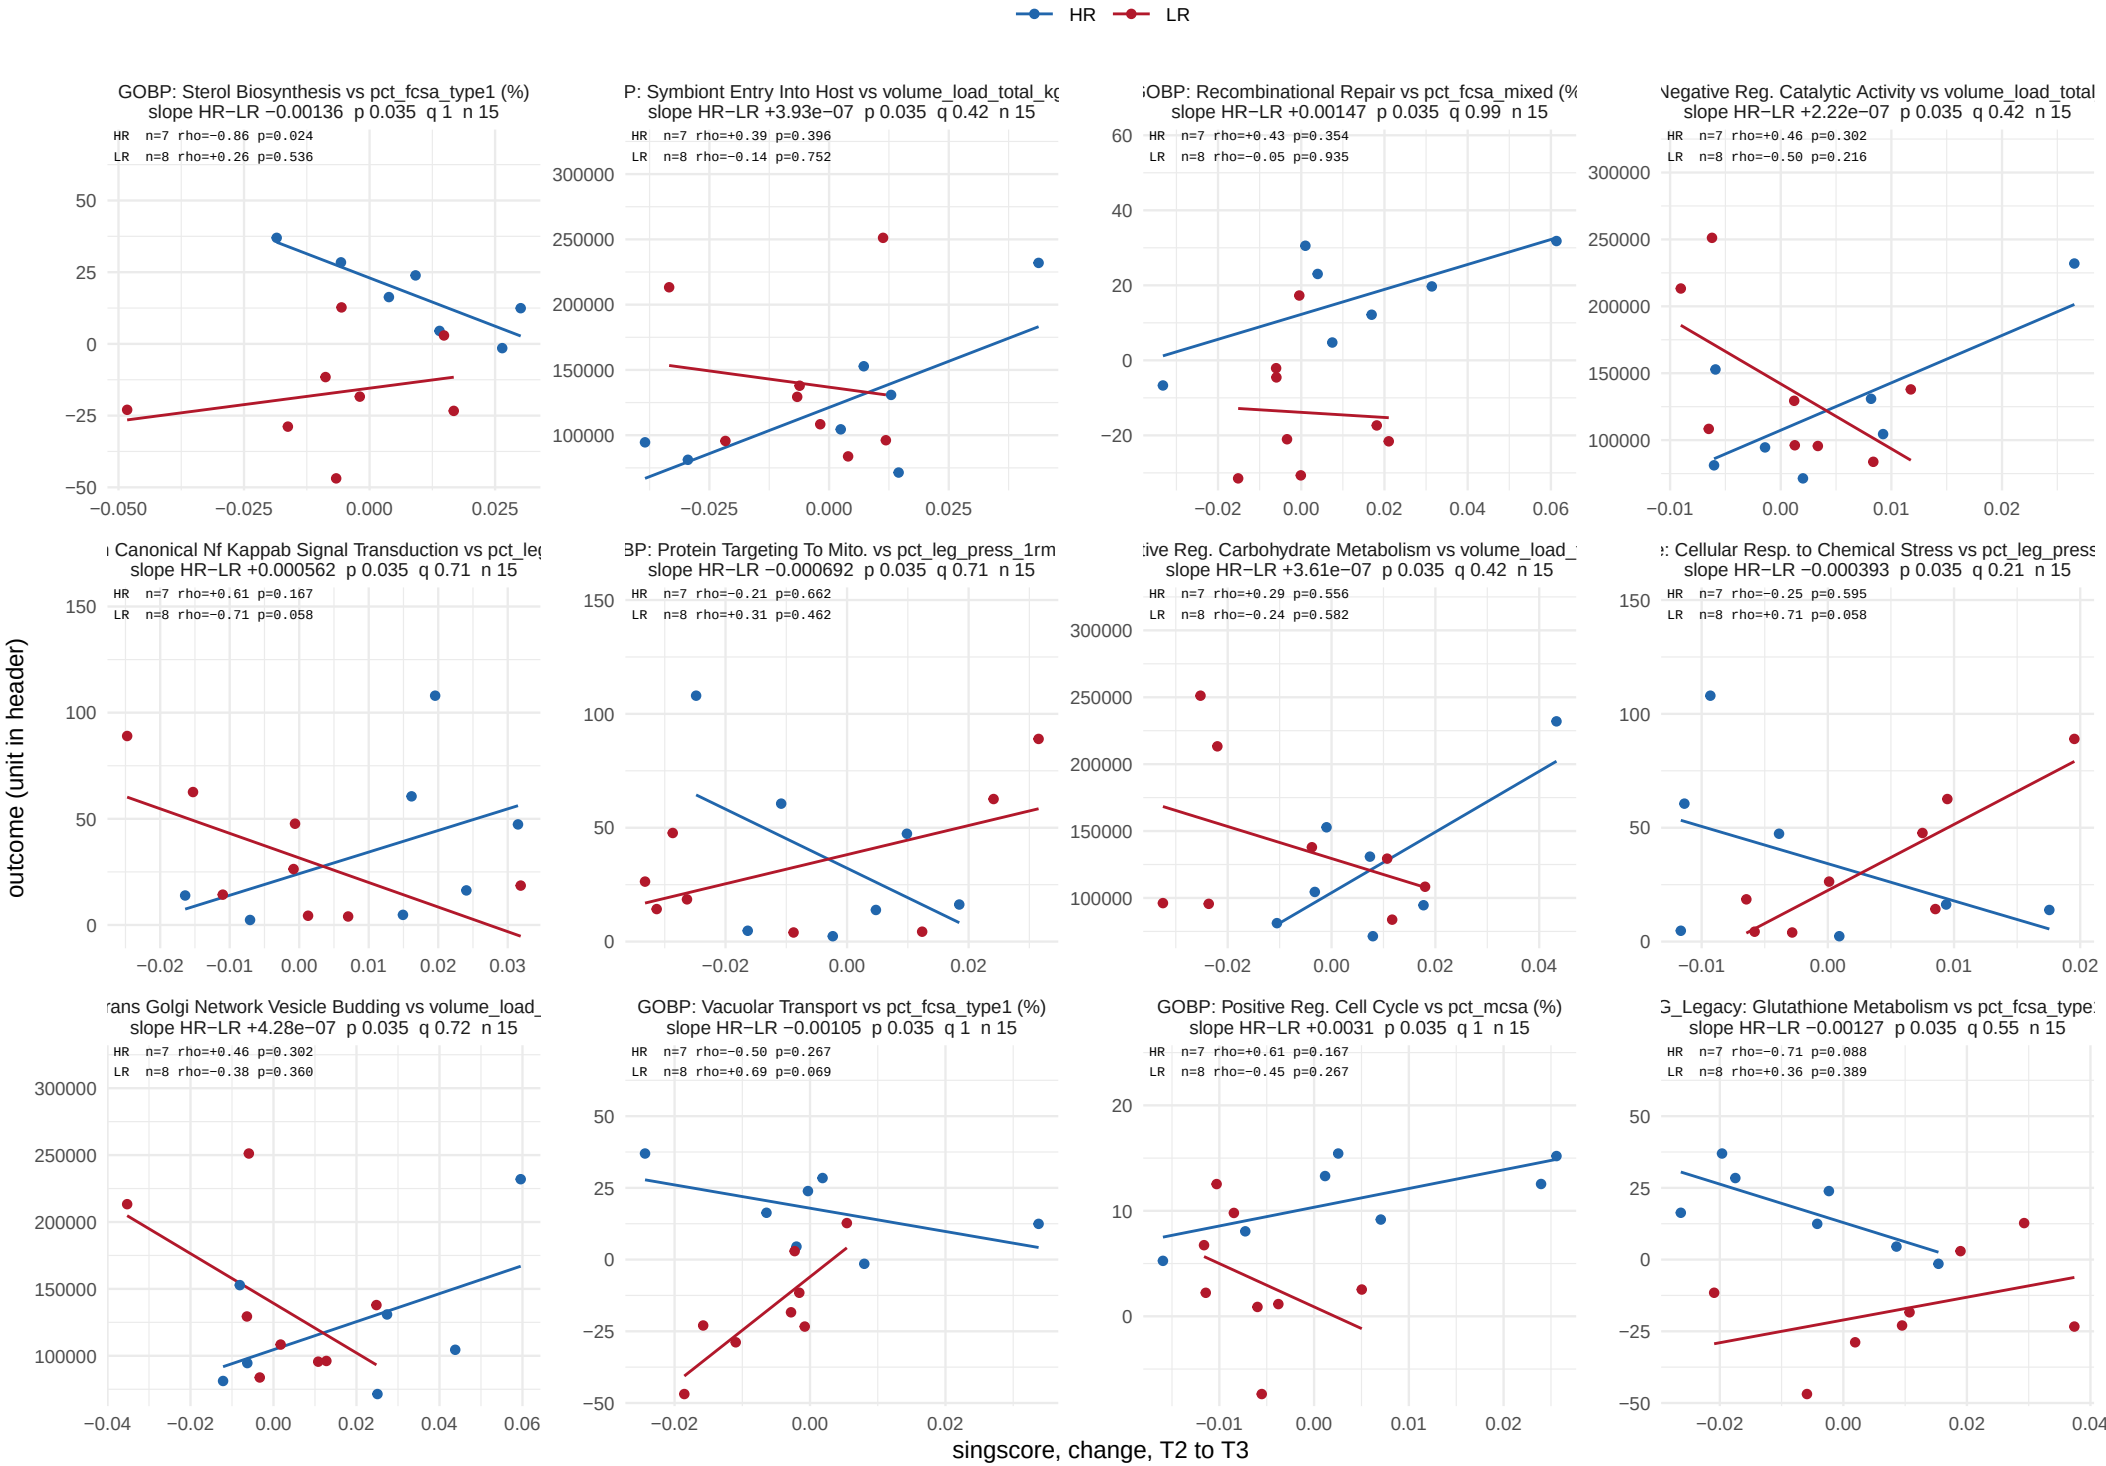


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, acute window


643 of 11024 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 37 of 54.

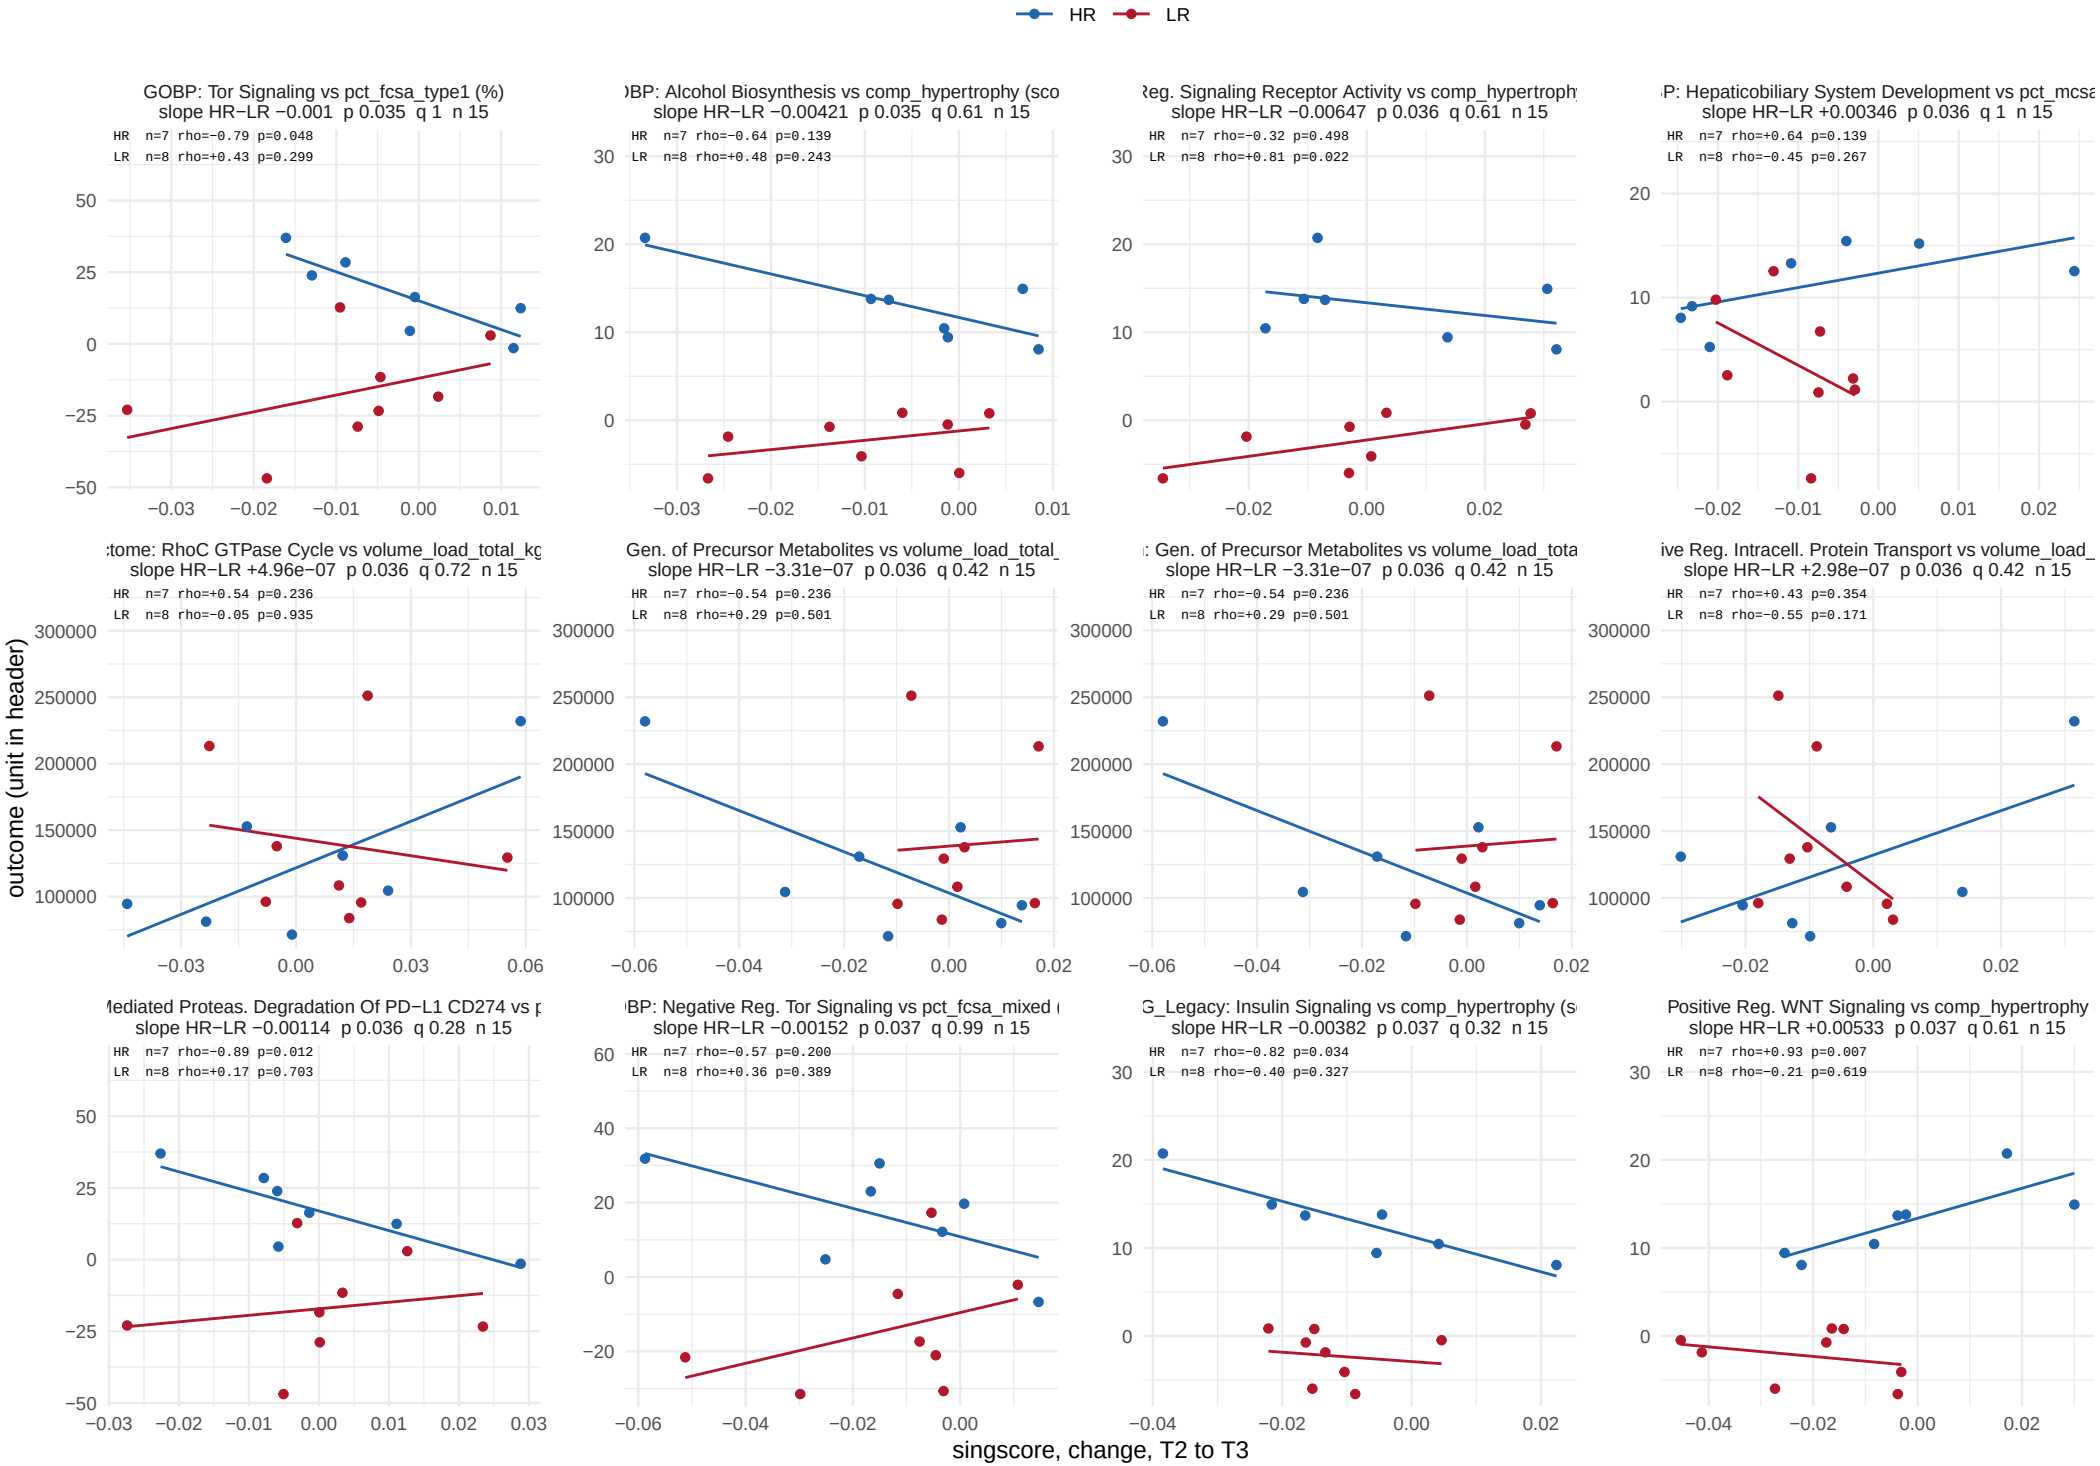


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, acute window


643 of 11024 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 38 of 54.

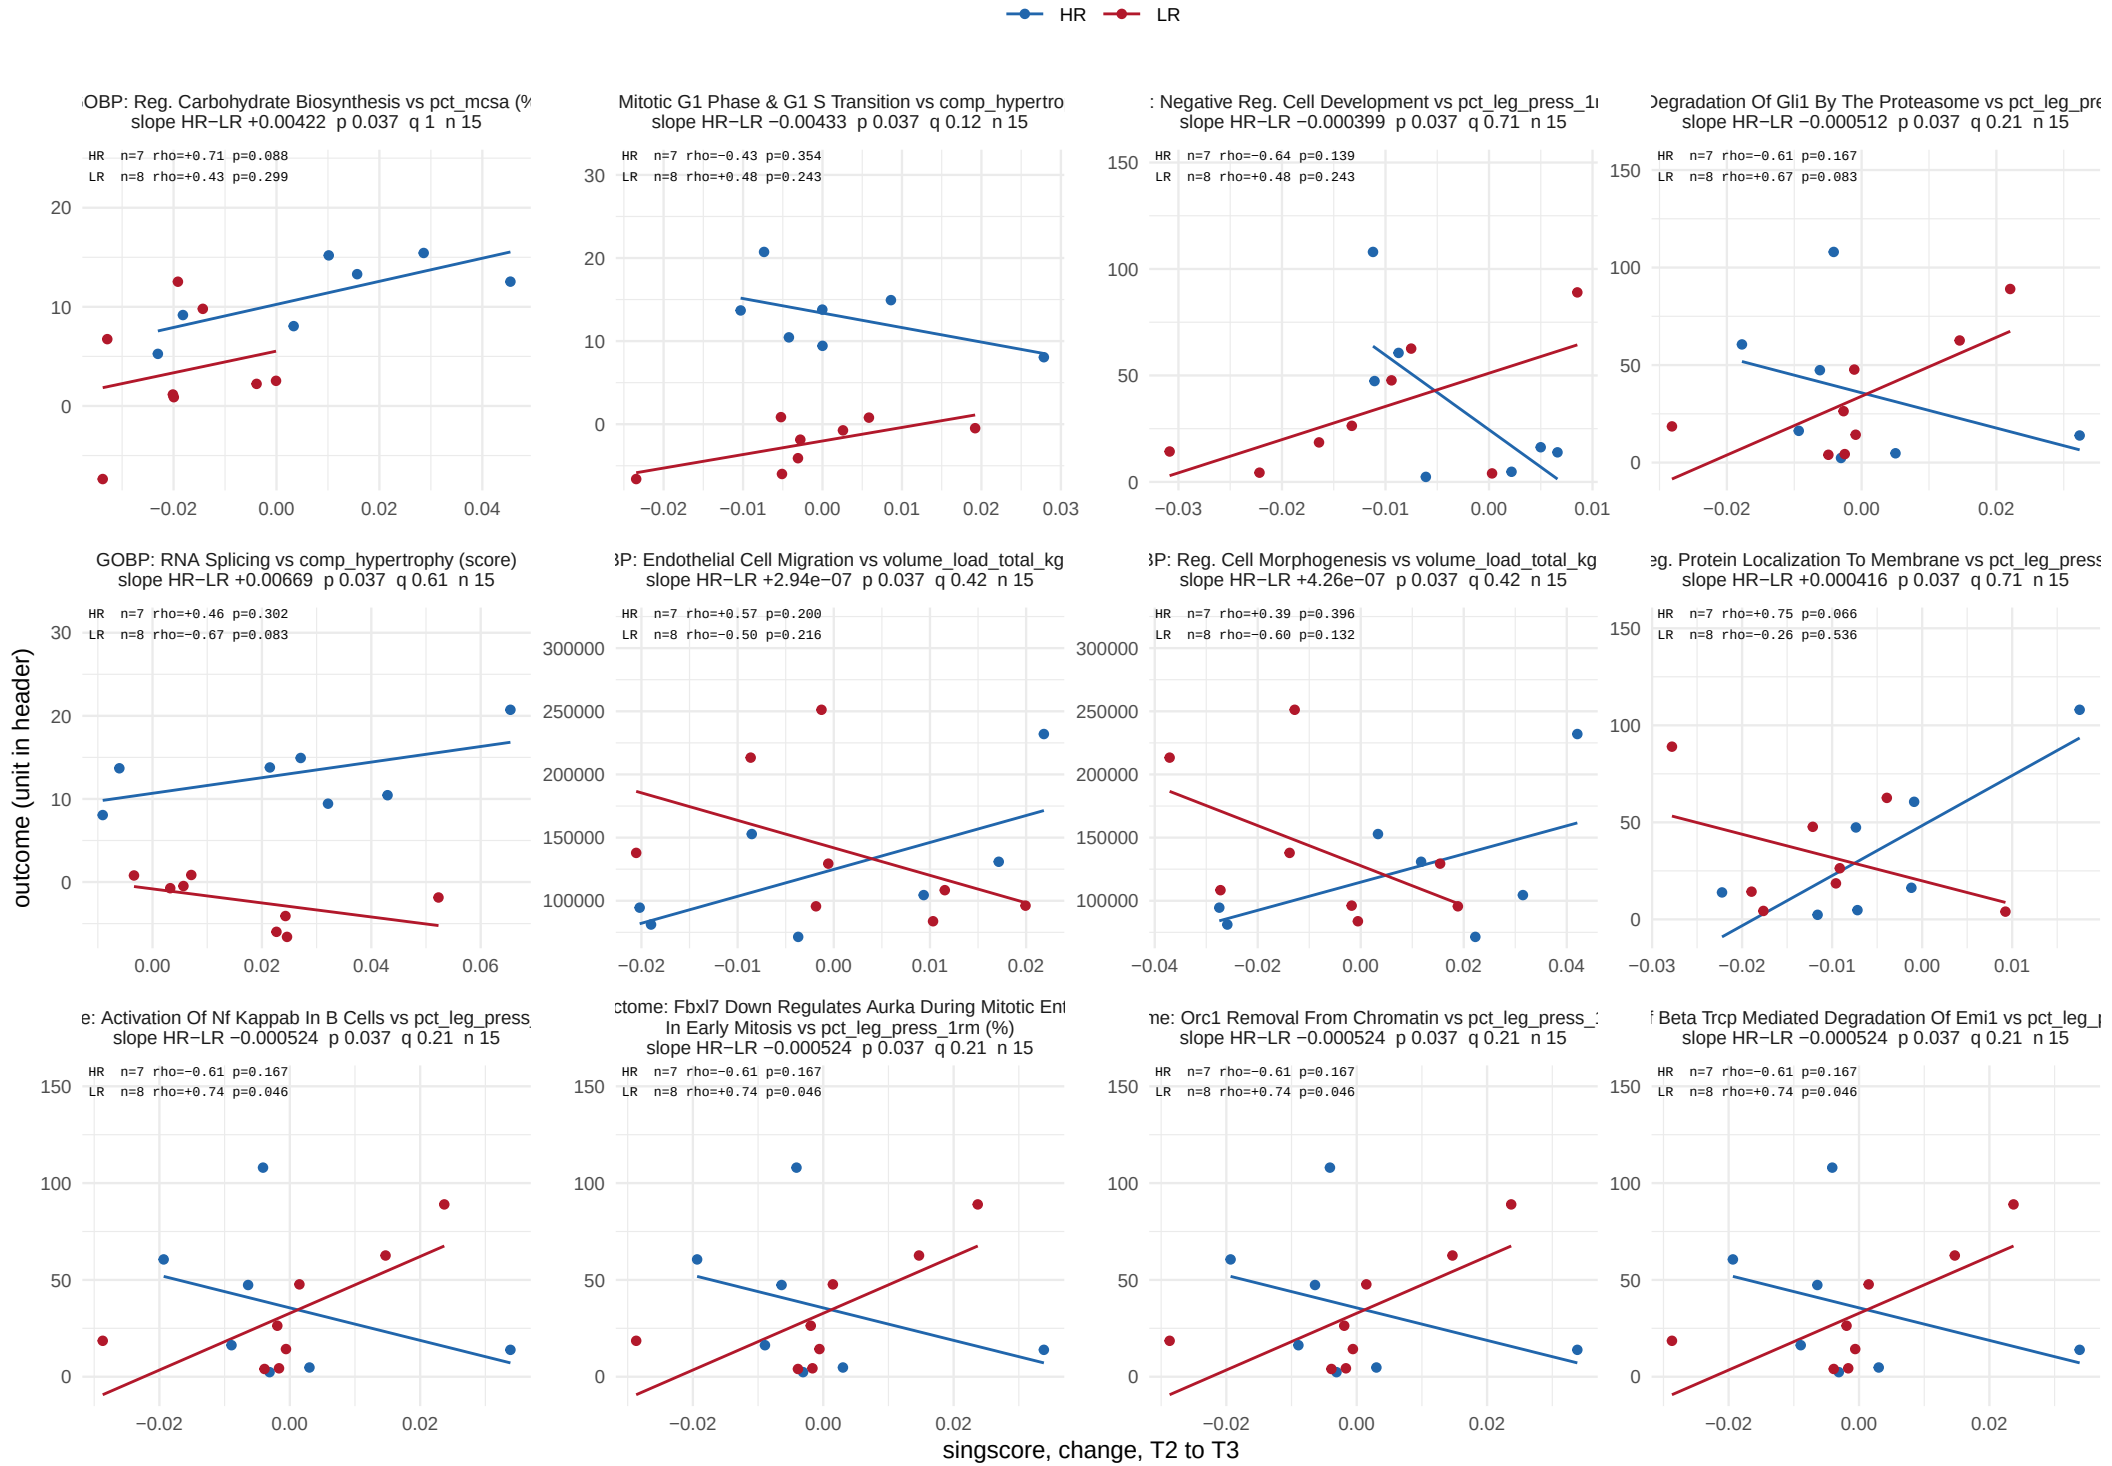


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, acute window


643 of 11024 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 39 of 54.

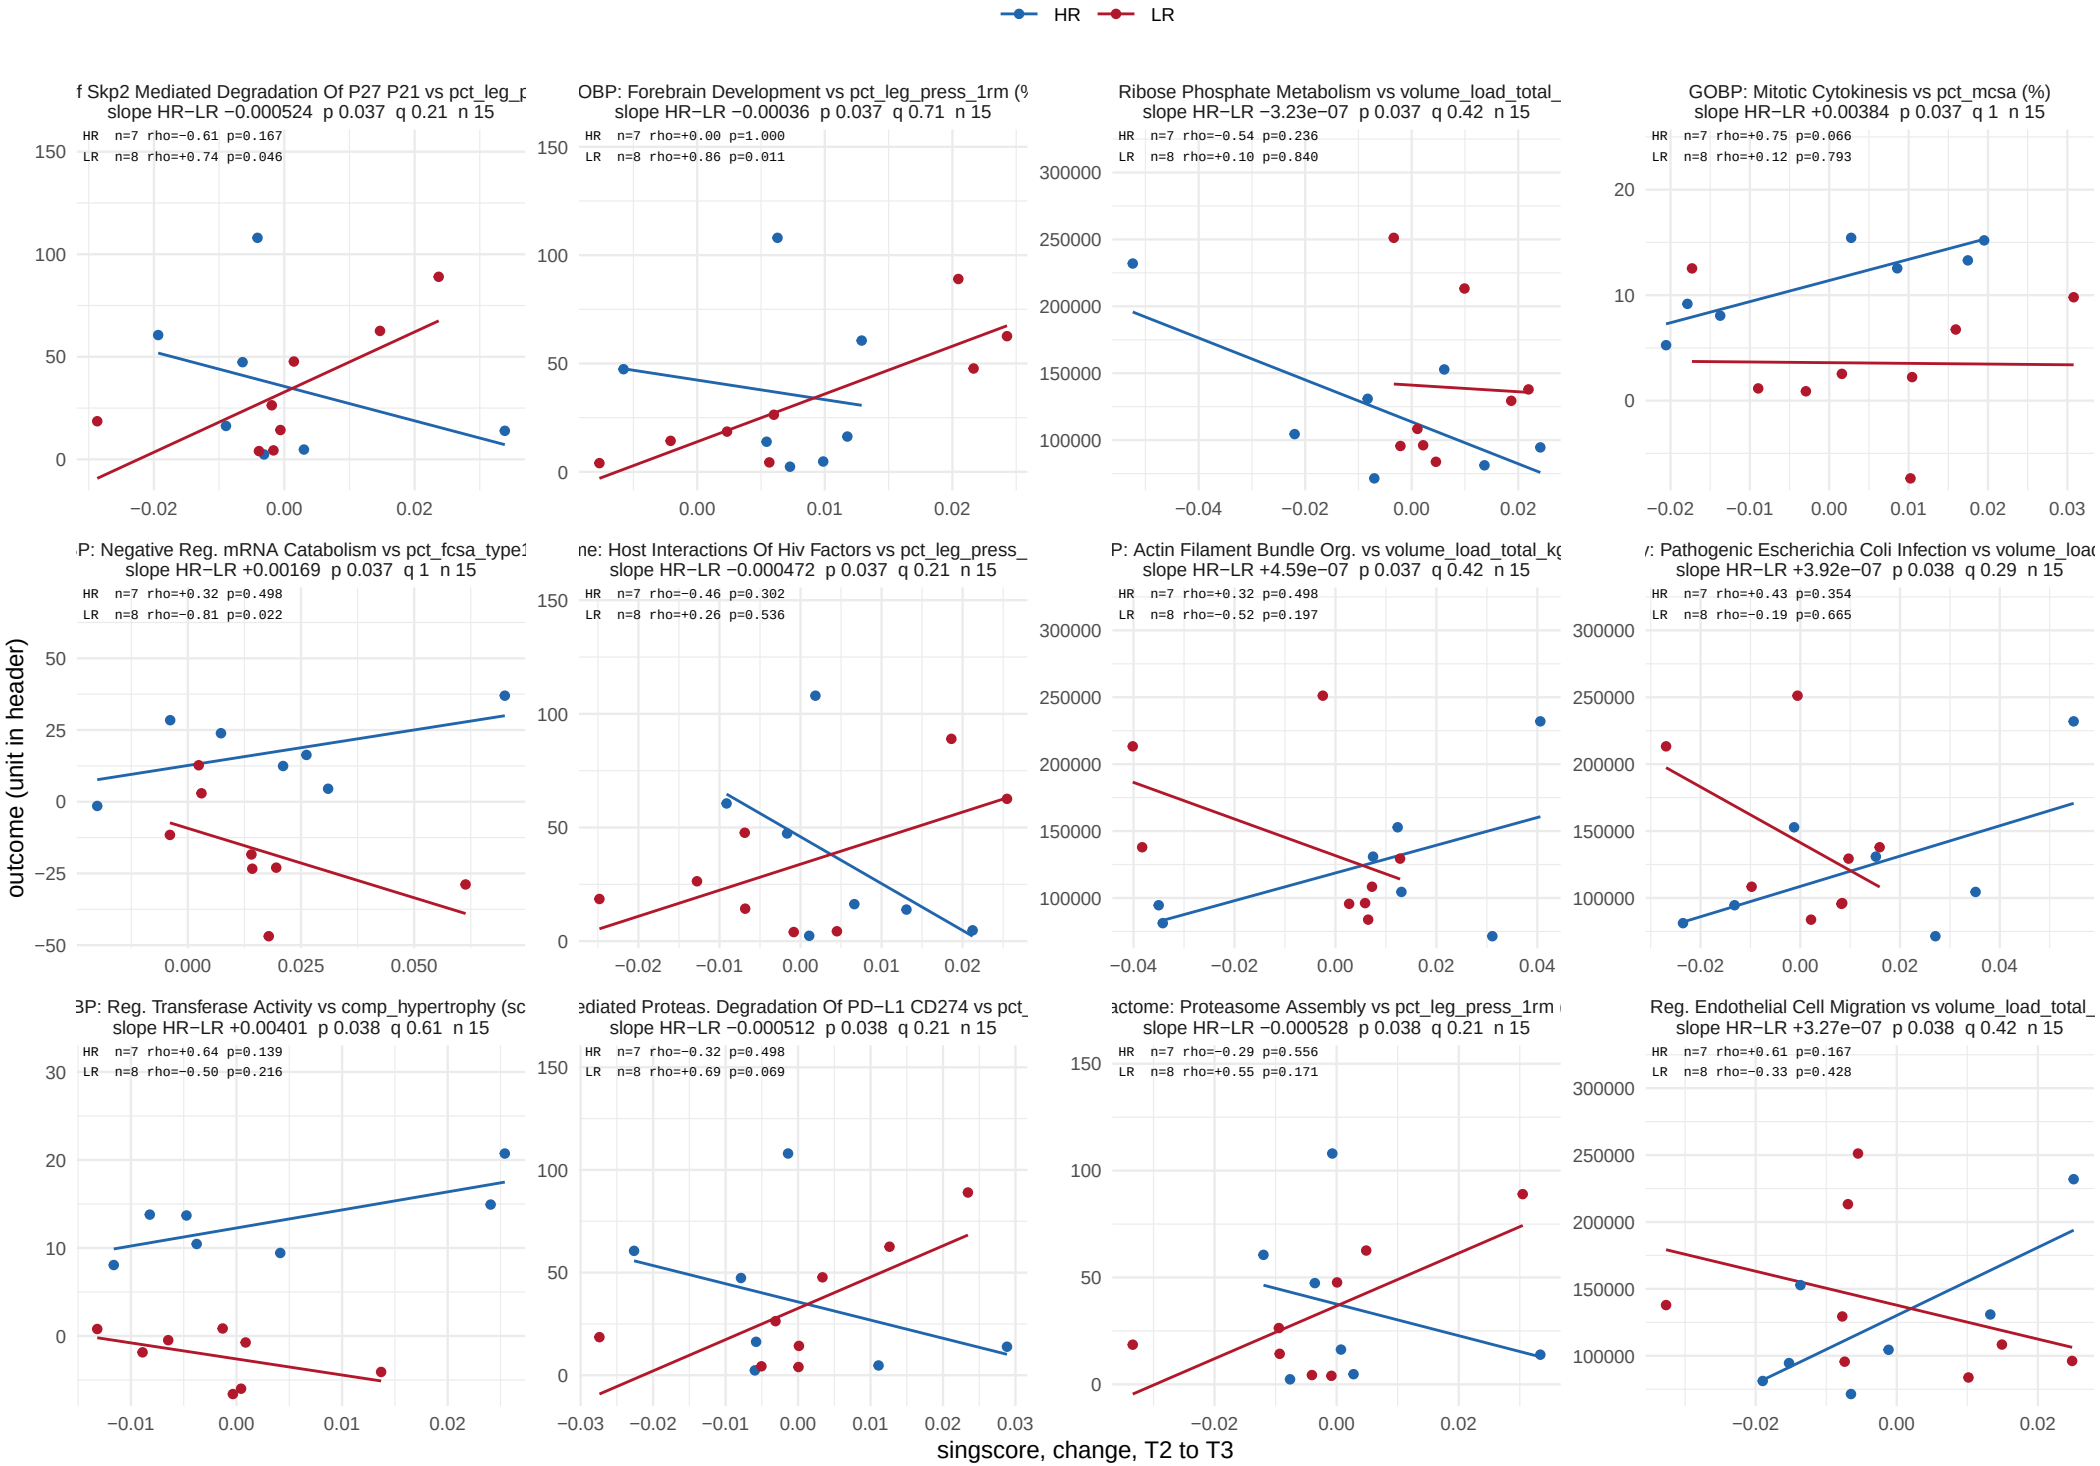


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, acute window


643 of 11024 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 40 of 54.

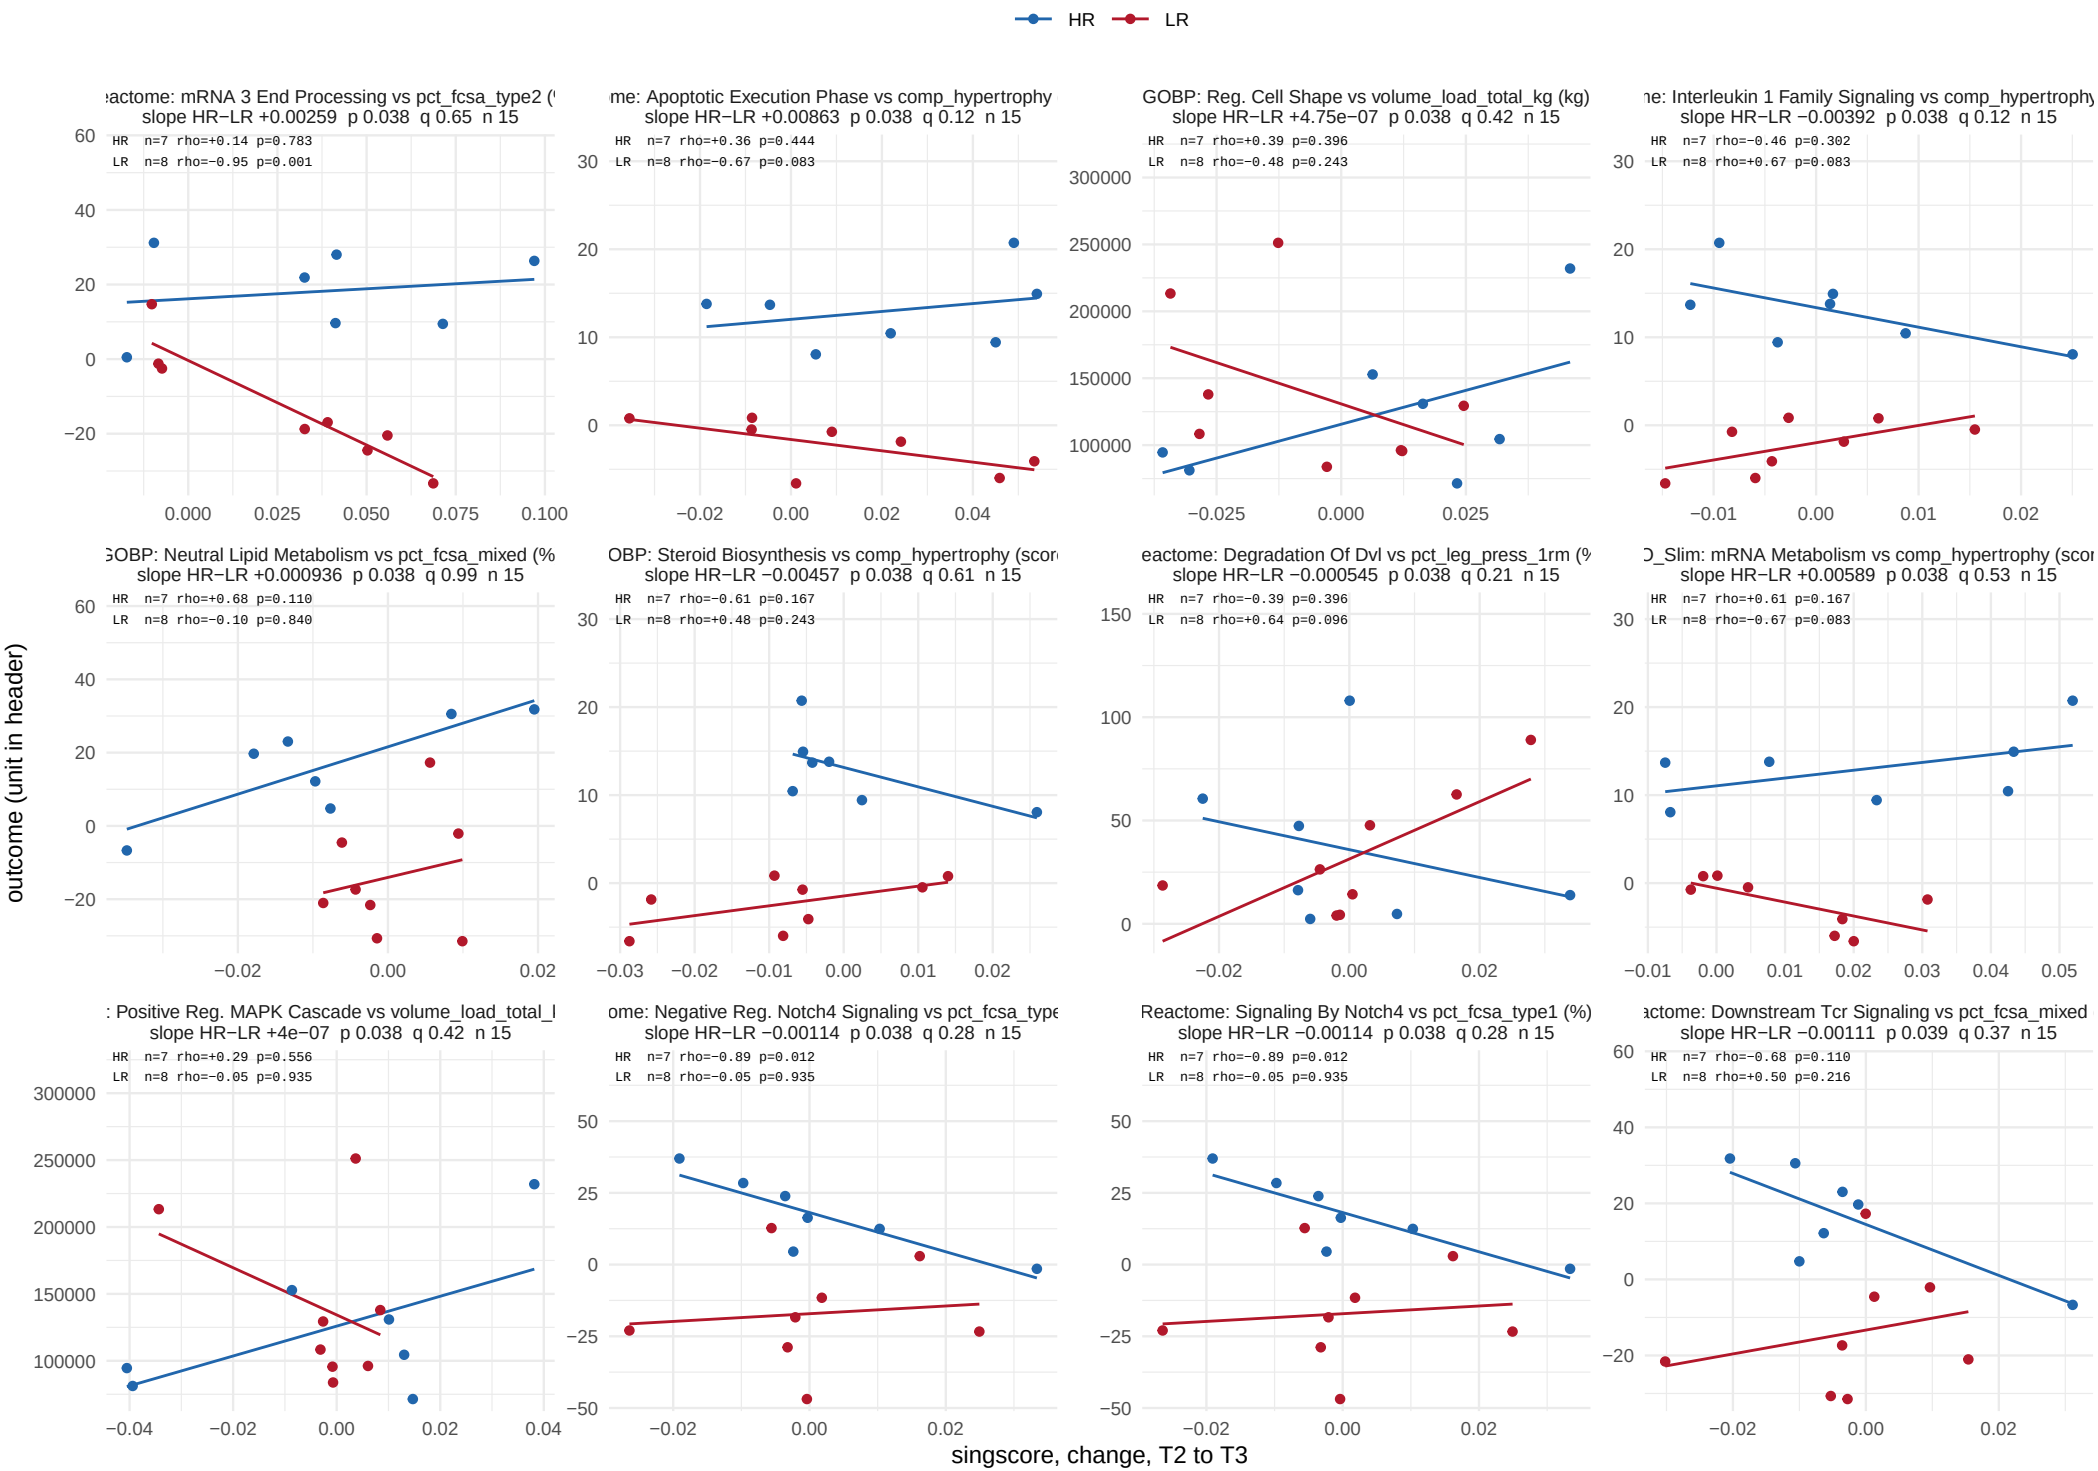


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, acute window


643 of 11024 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 41 of 54.

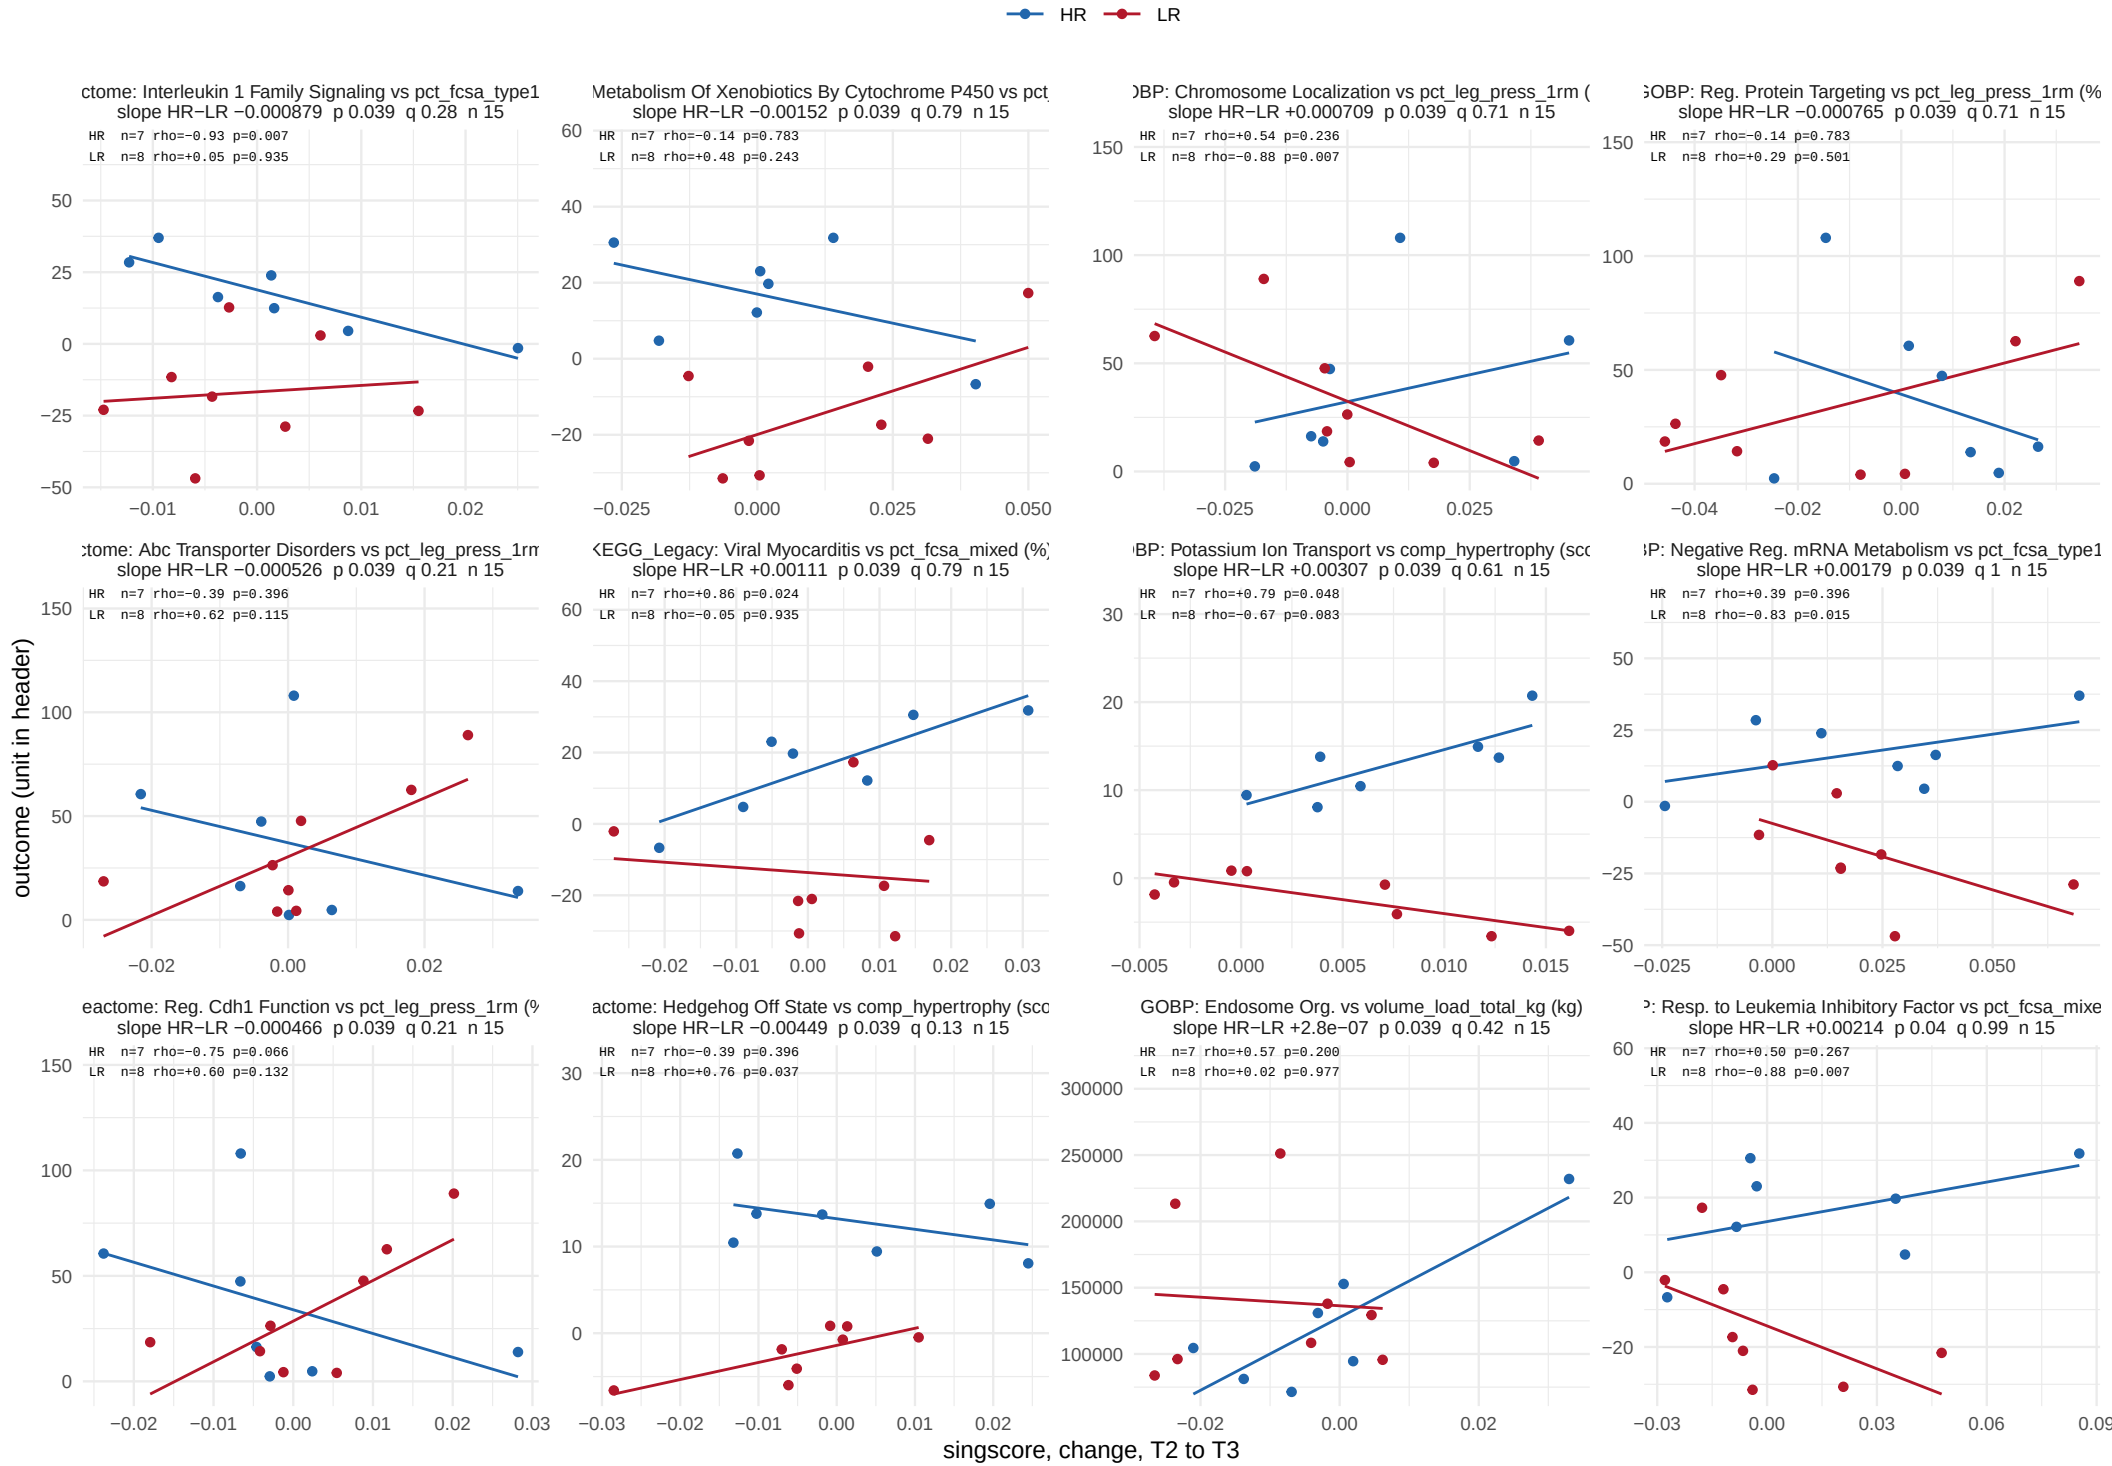


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, acute window


643 of 11024 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 42 of 54.

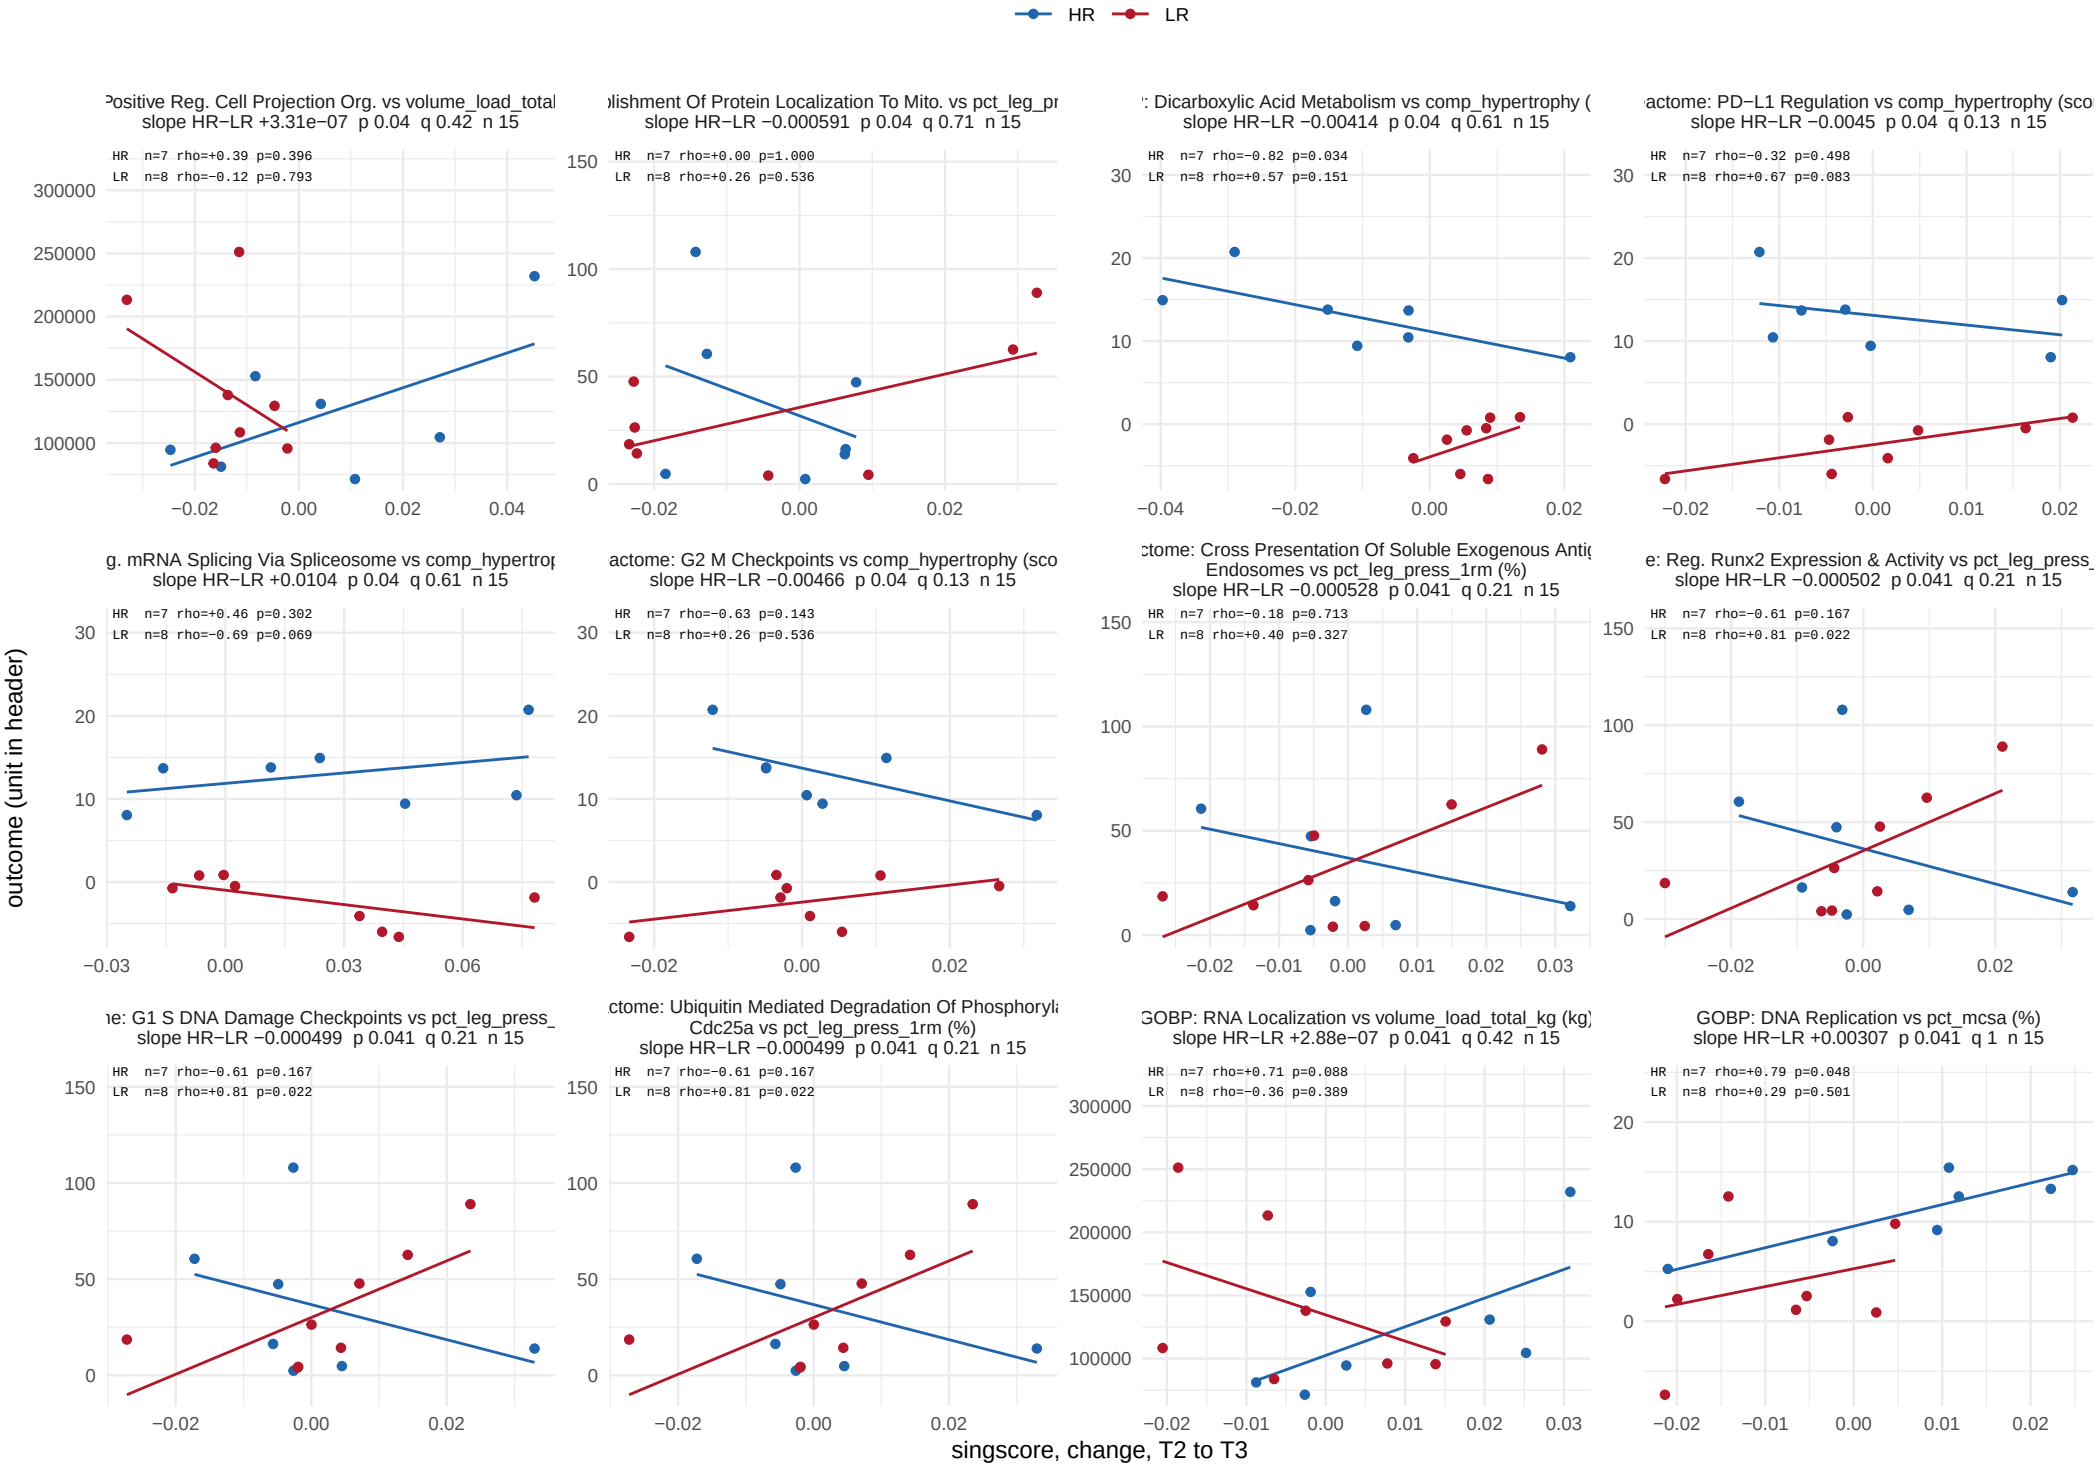


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, acute window


643 of 11024 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 43 of 54.

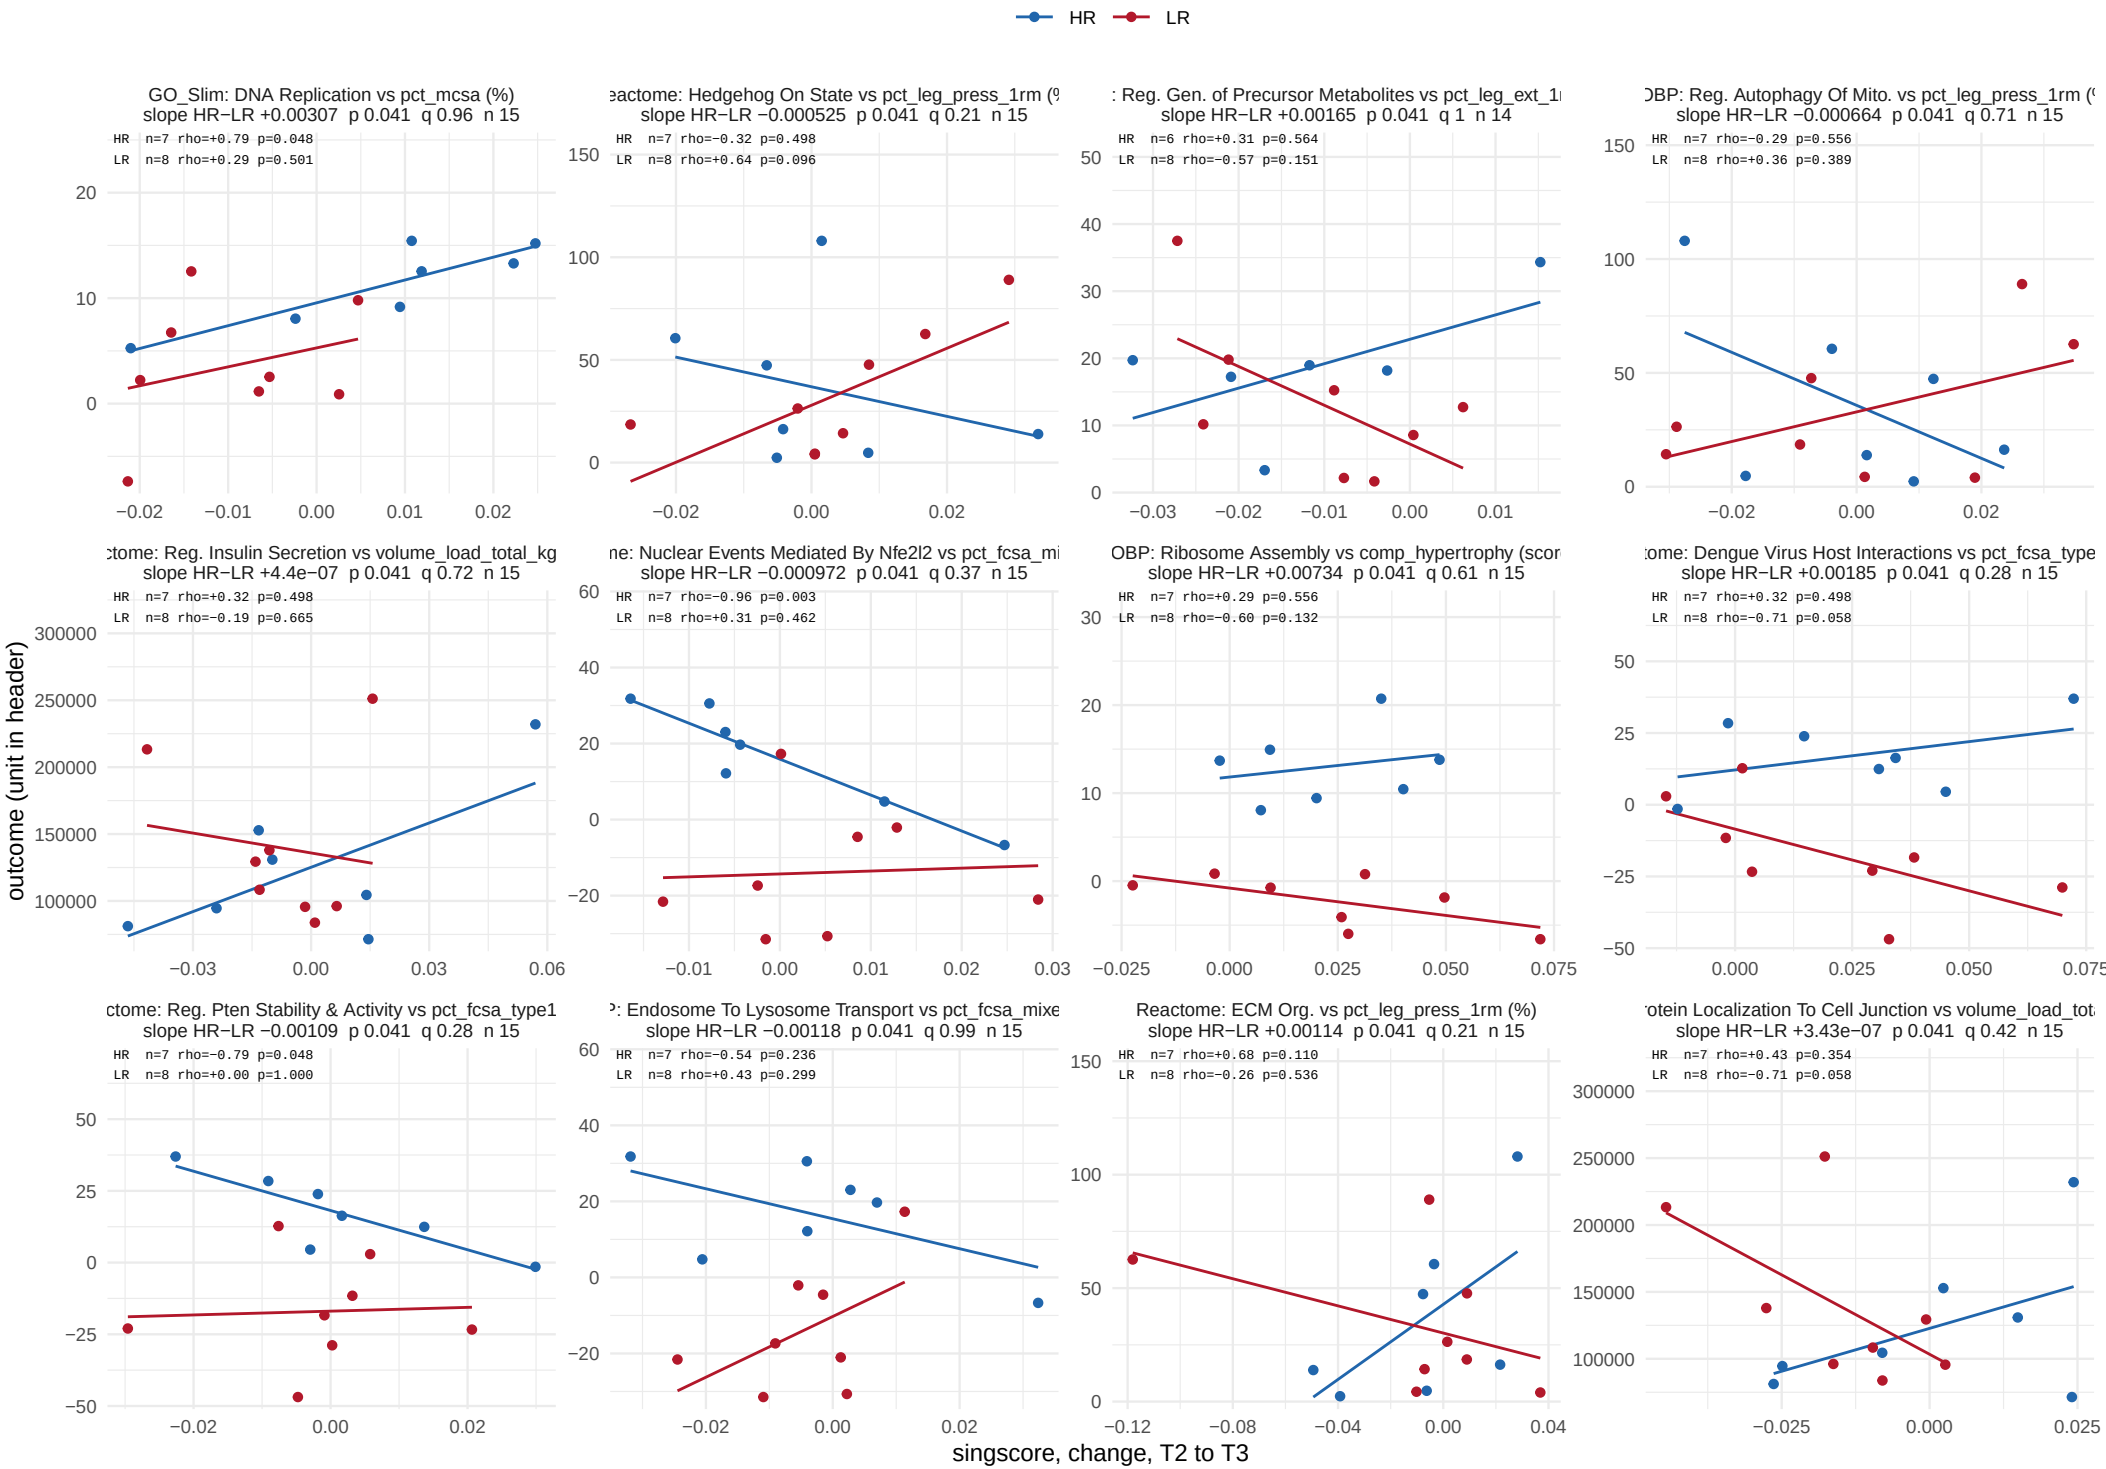


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, acute window


643 of 11024 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 44 of 54.

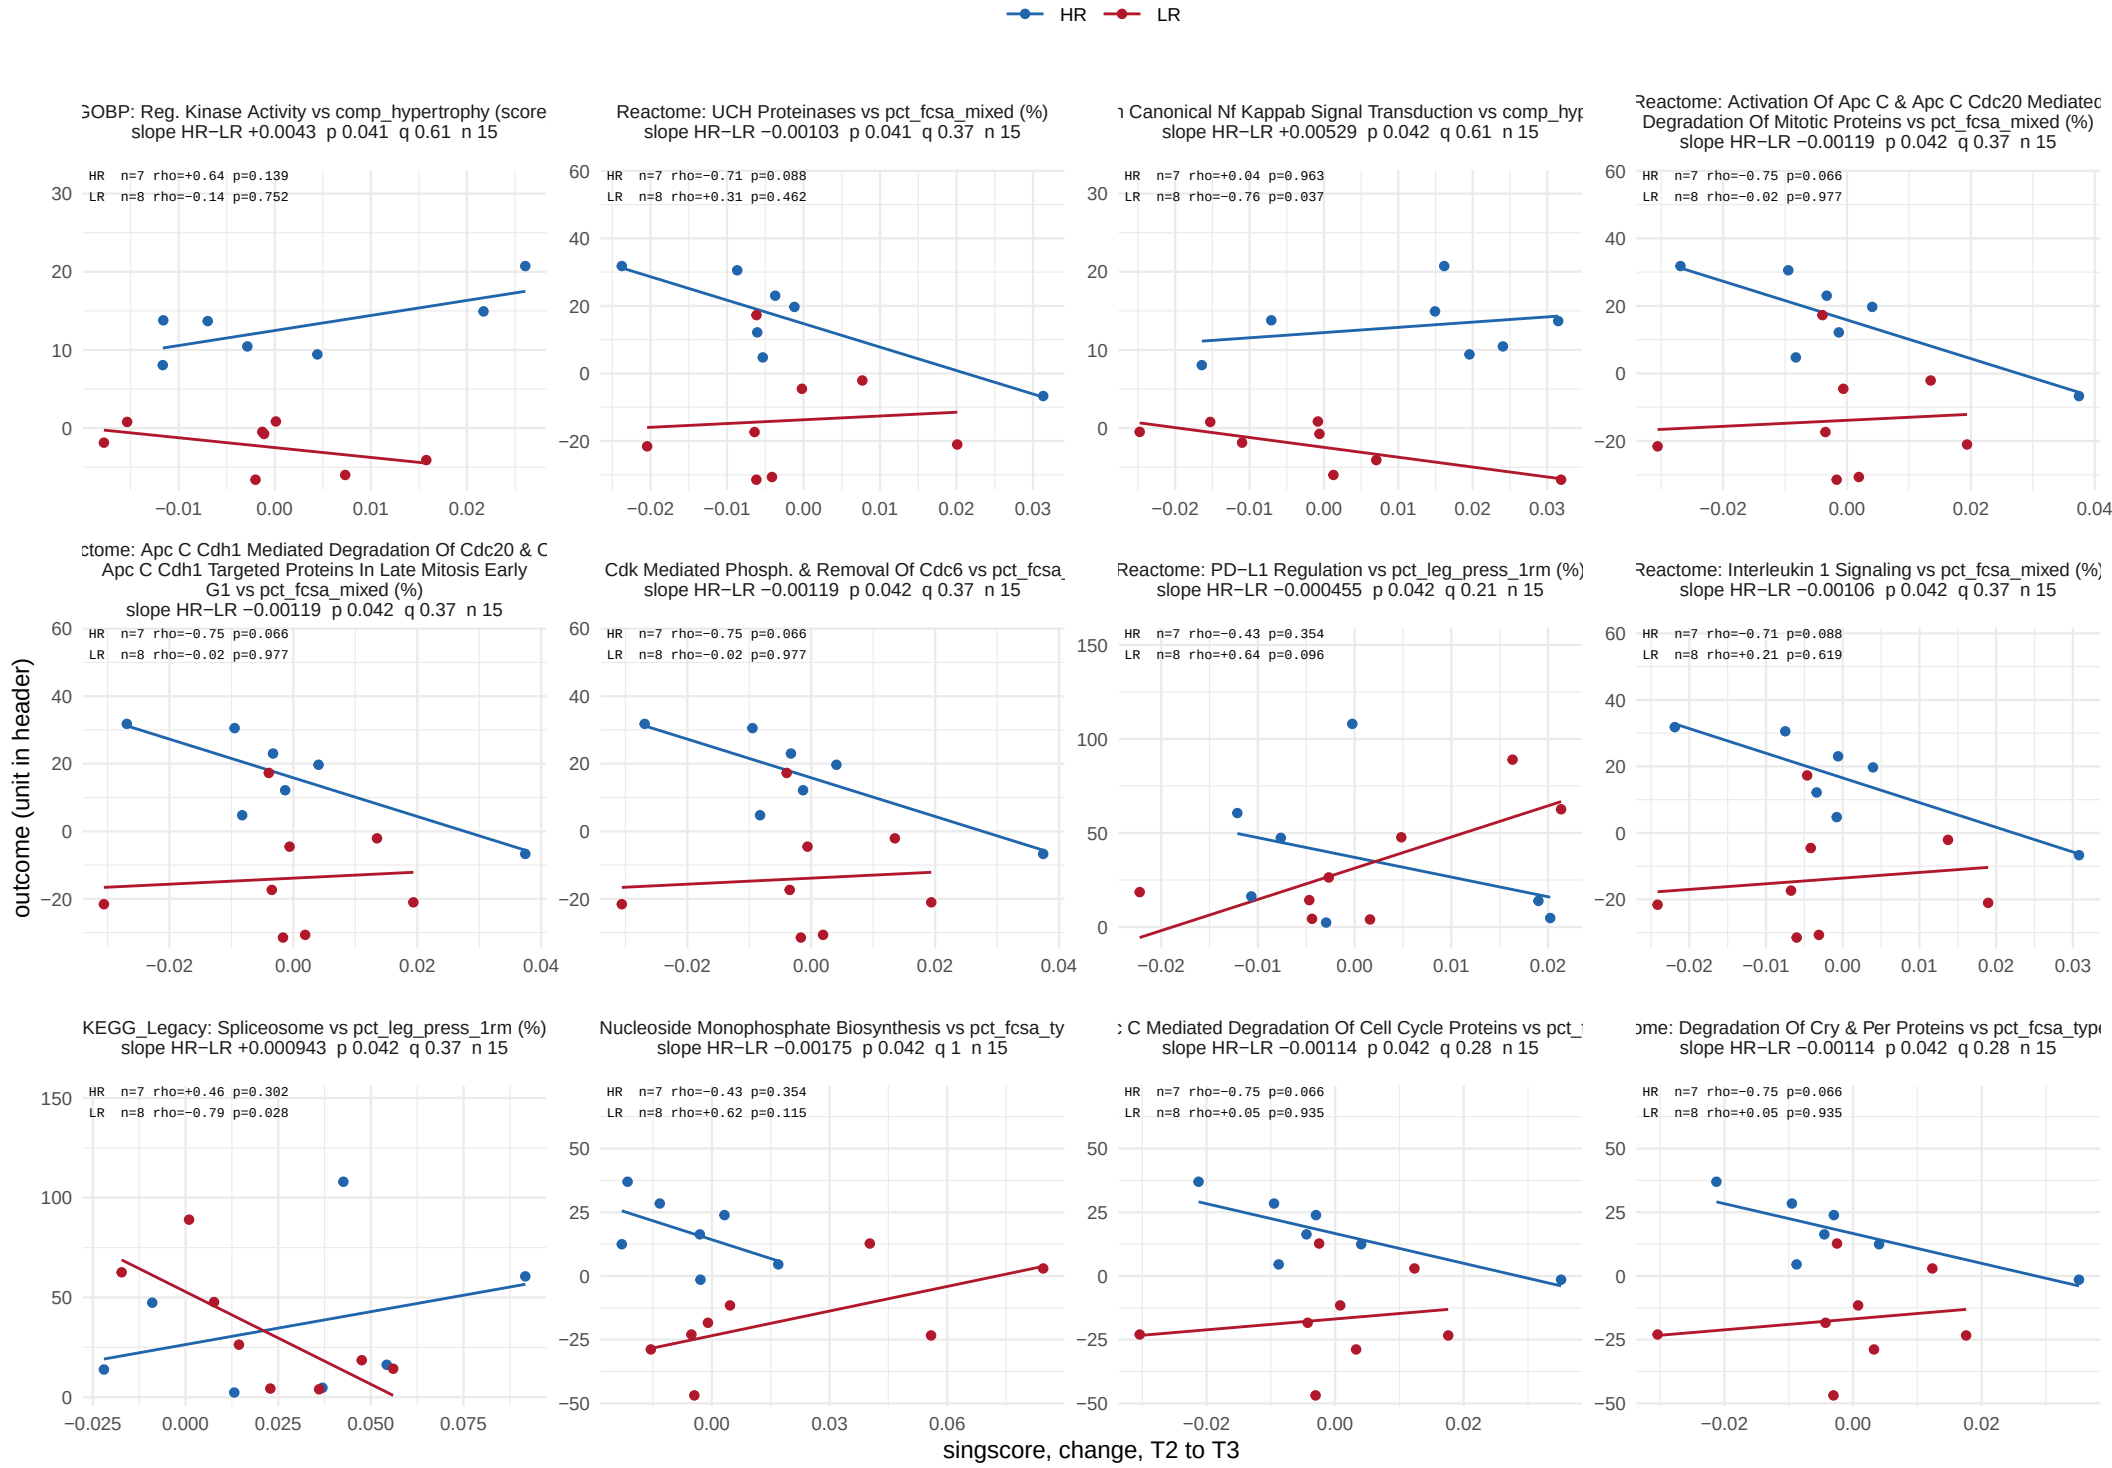


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, acute window


643 of 11024 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 45 of 54.

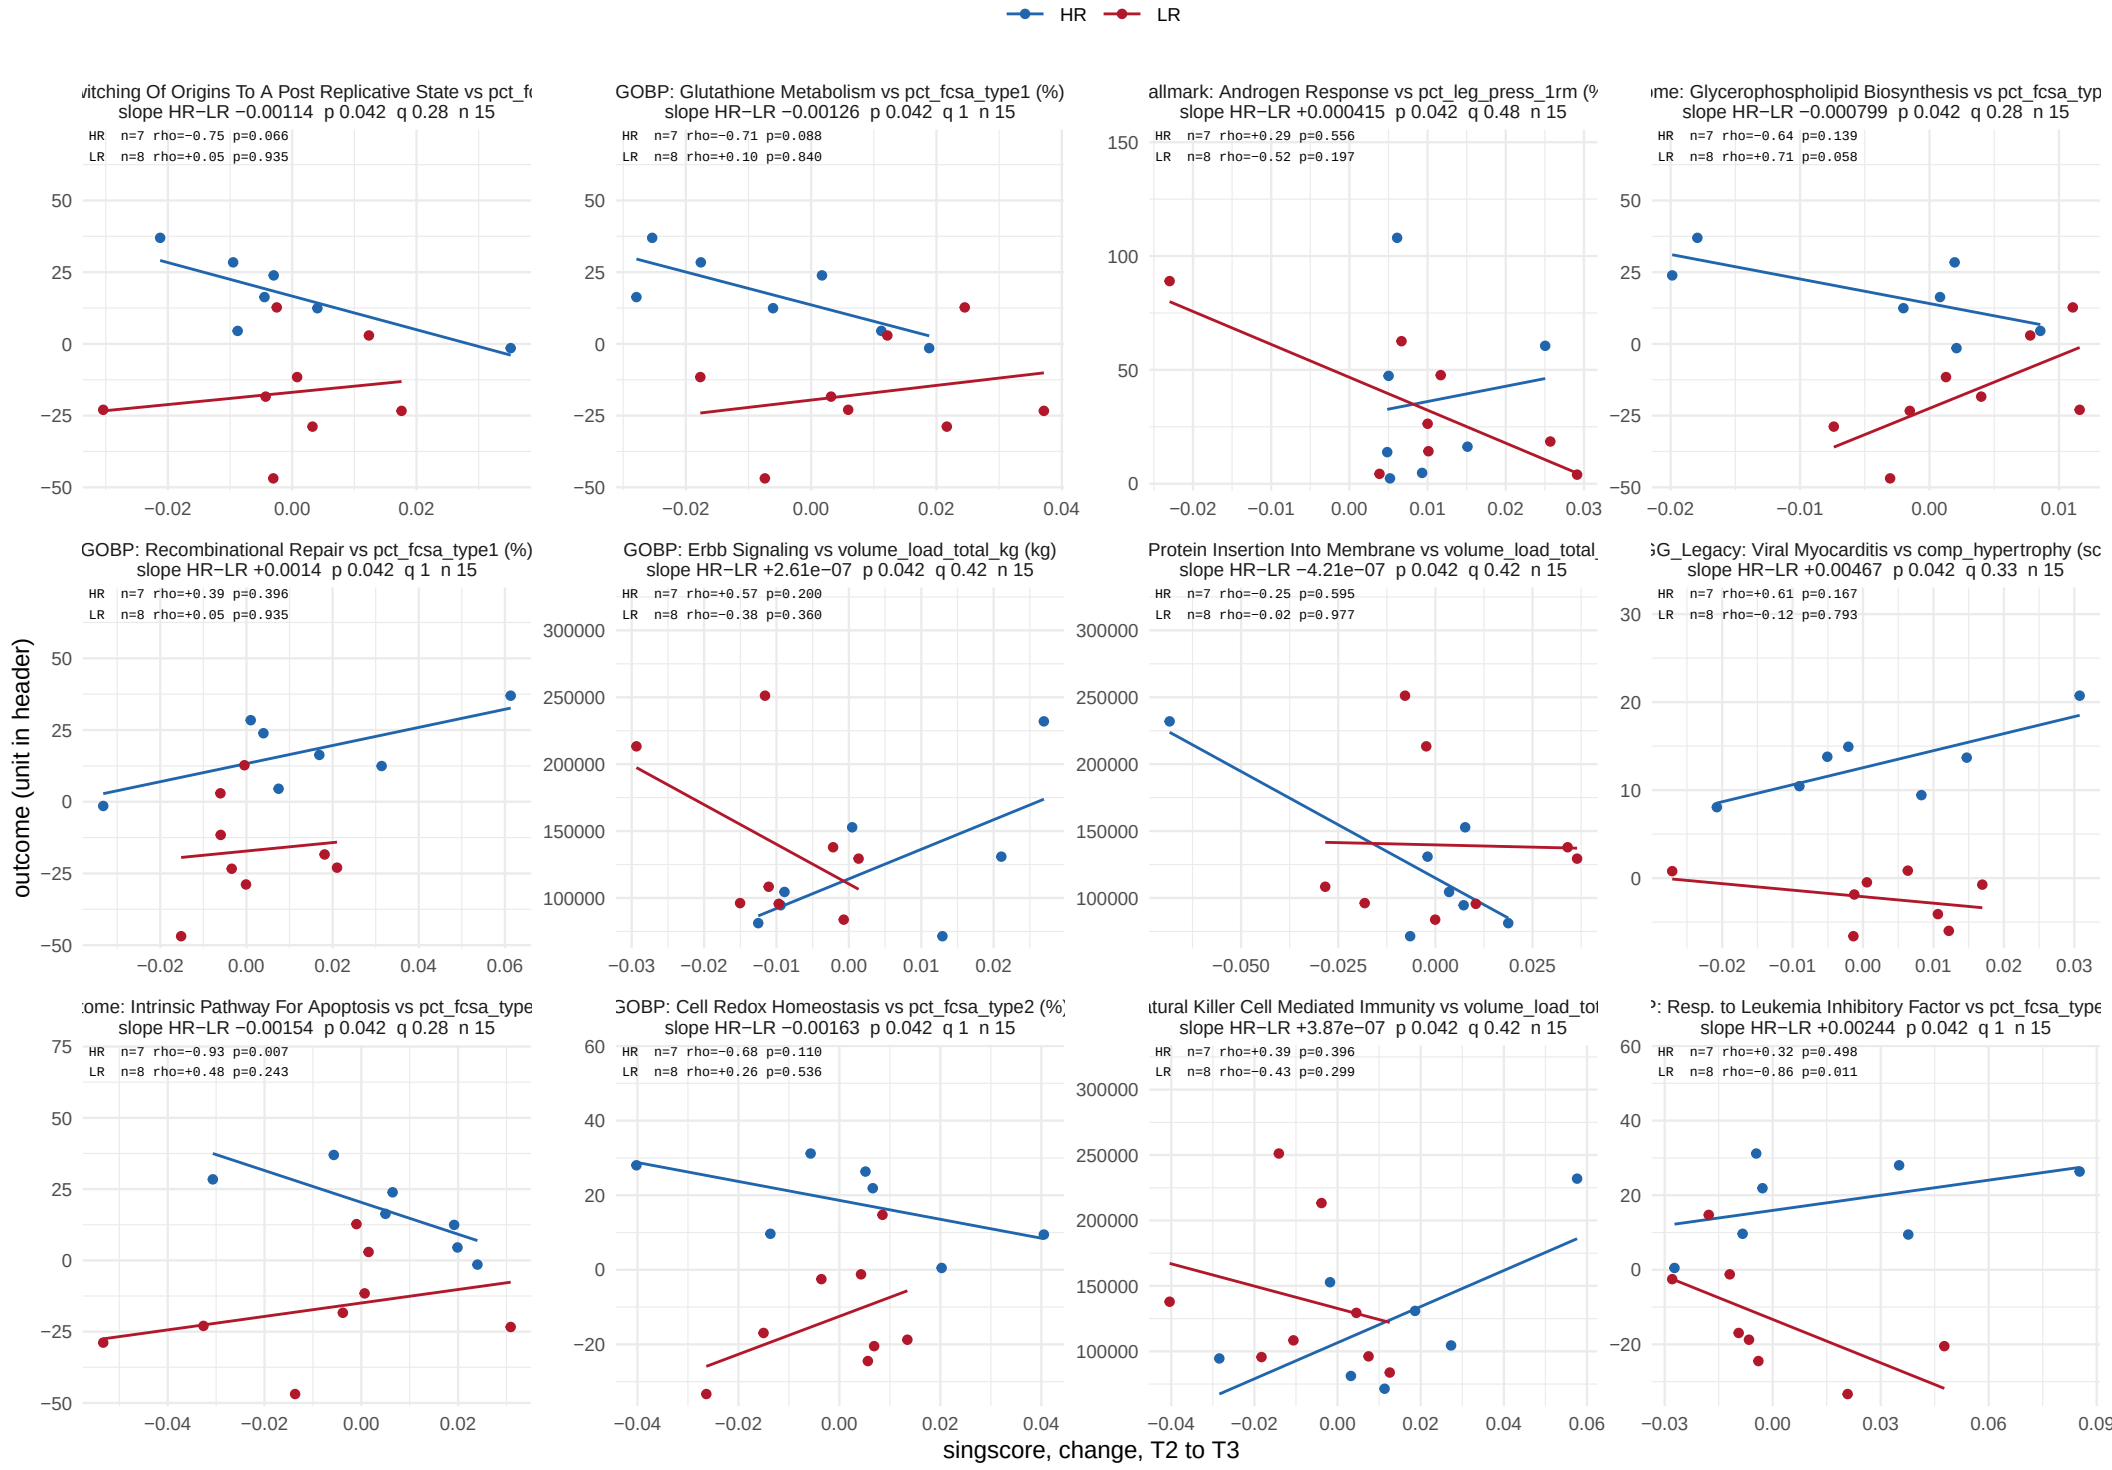


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, acute window


643 of 11024 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 46 of 54.

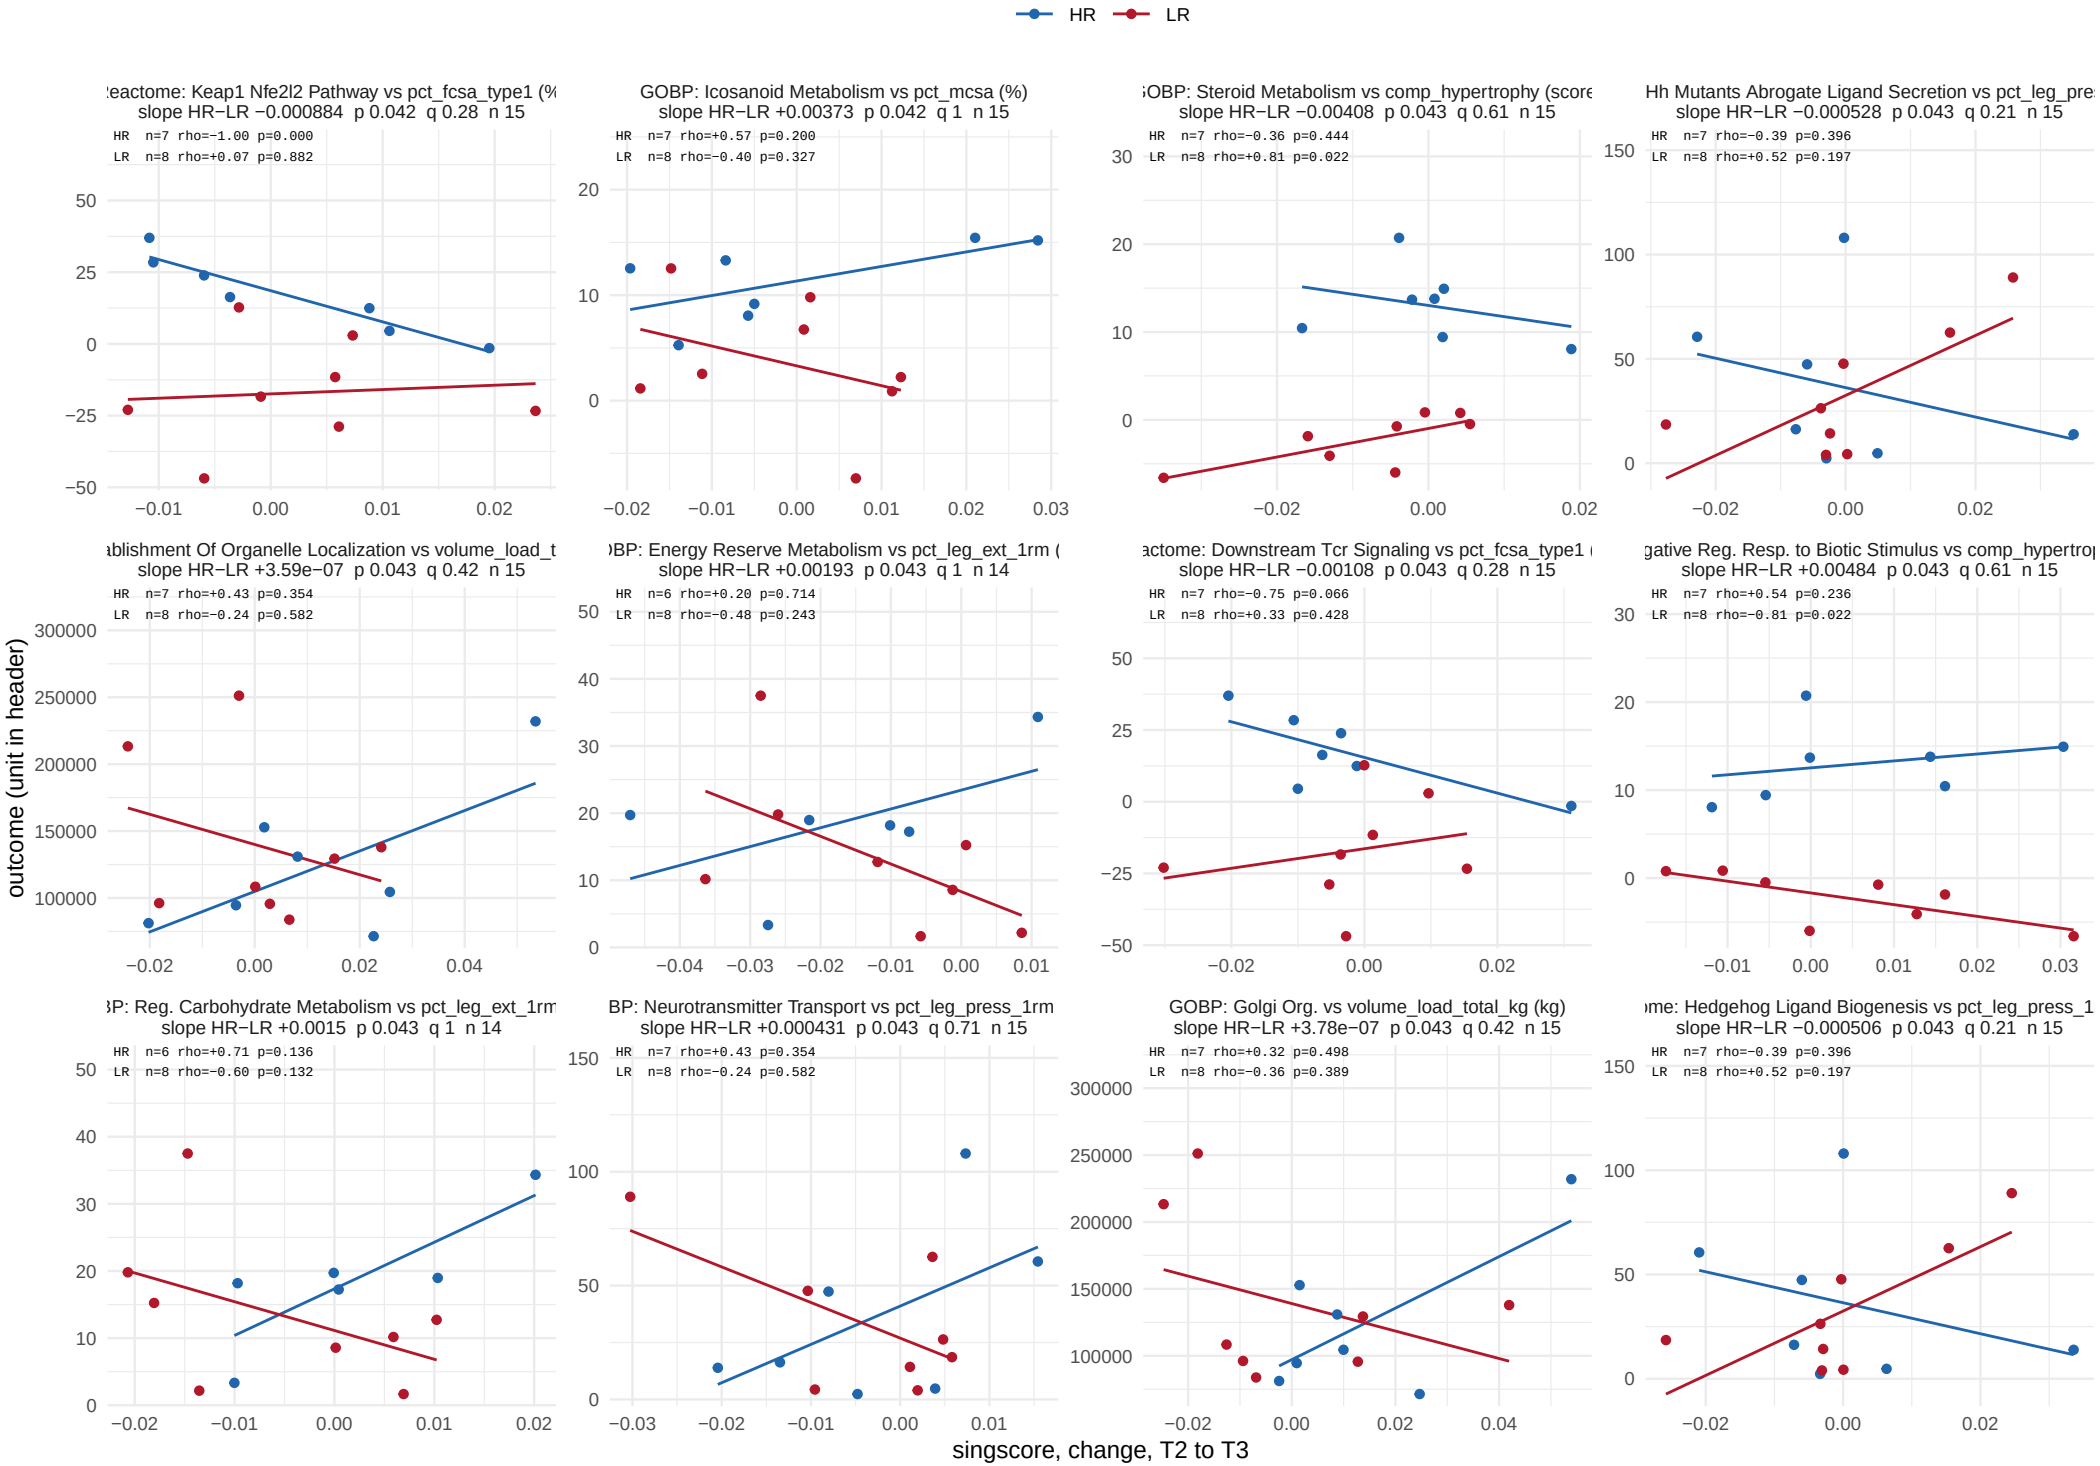


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, acute window


643 of 11024 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 47 of 54.

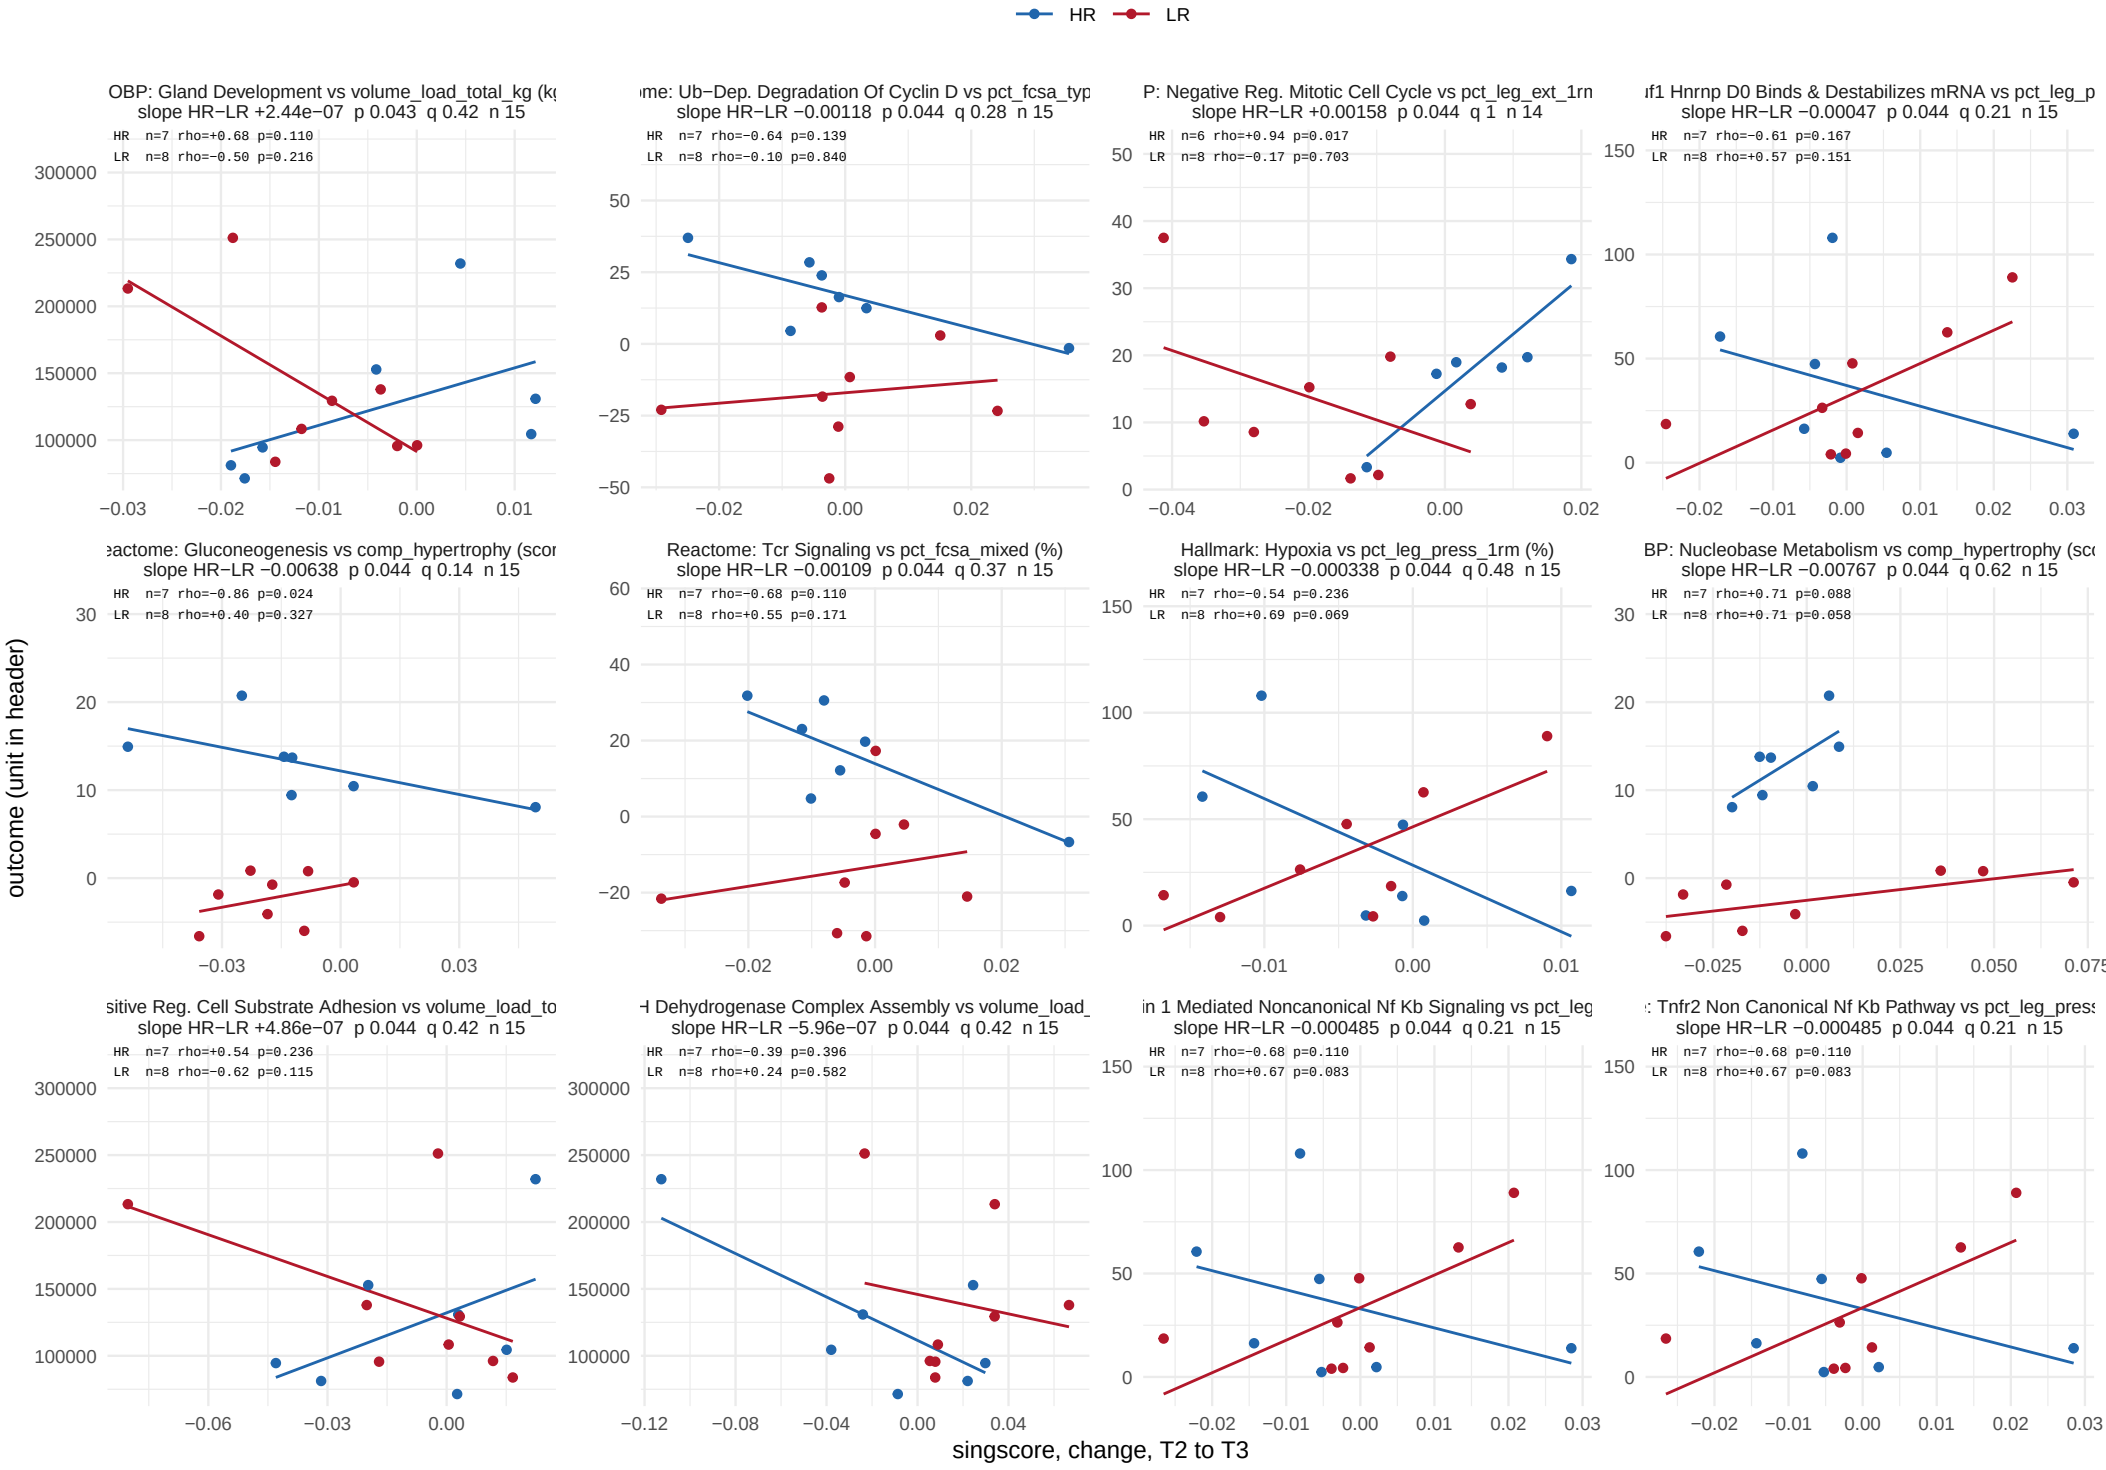


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, acute window


643 of 11024 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 48 of 54.

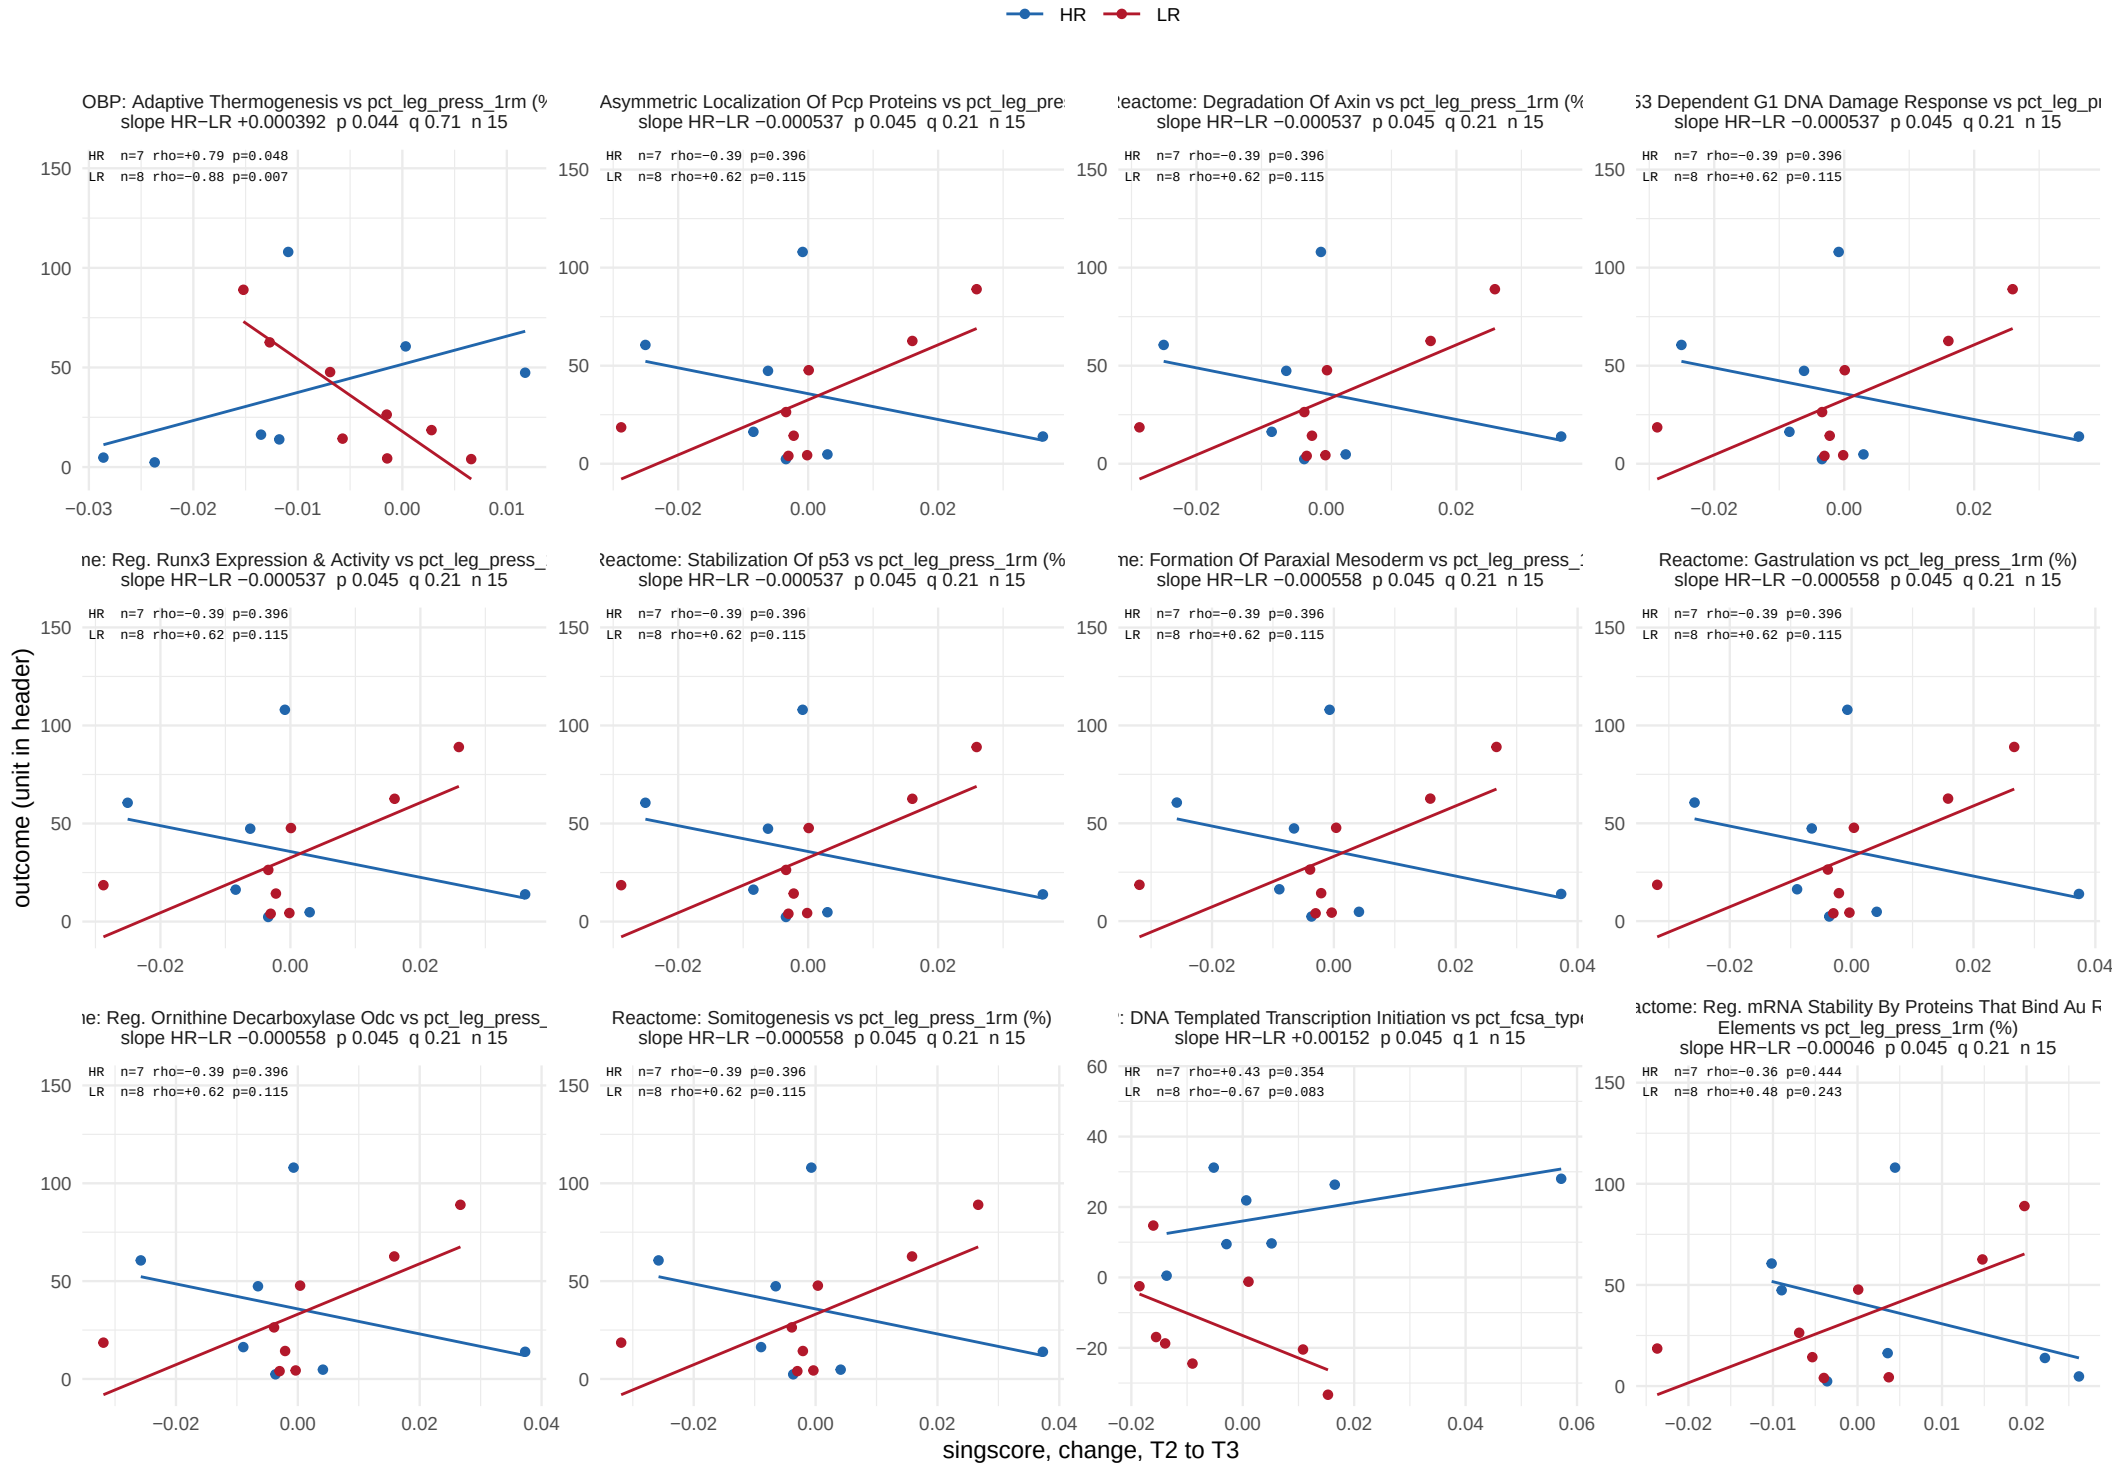


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, acute window


643 of 11024 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 49 of 54.

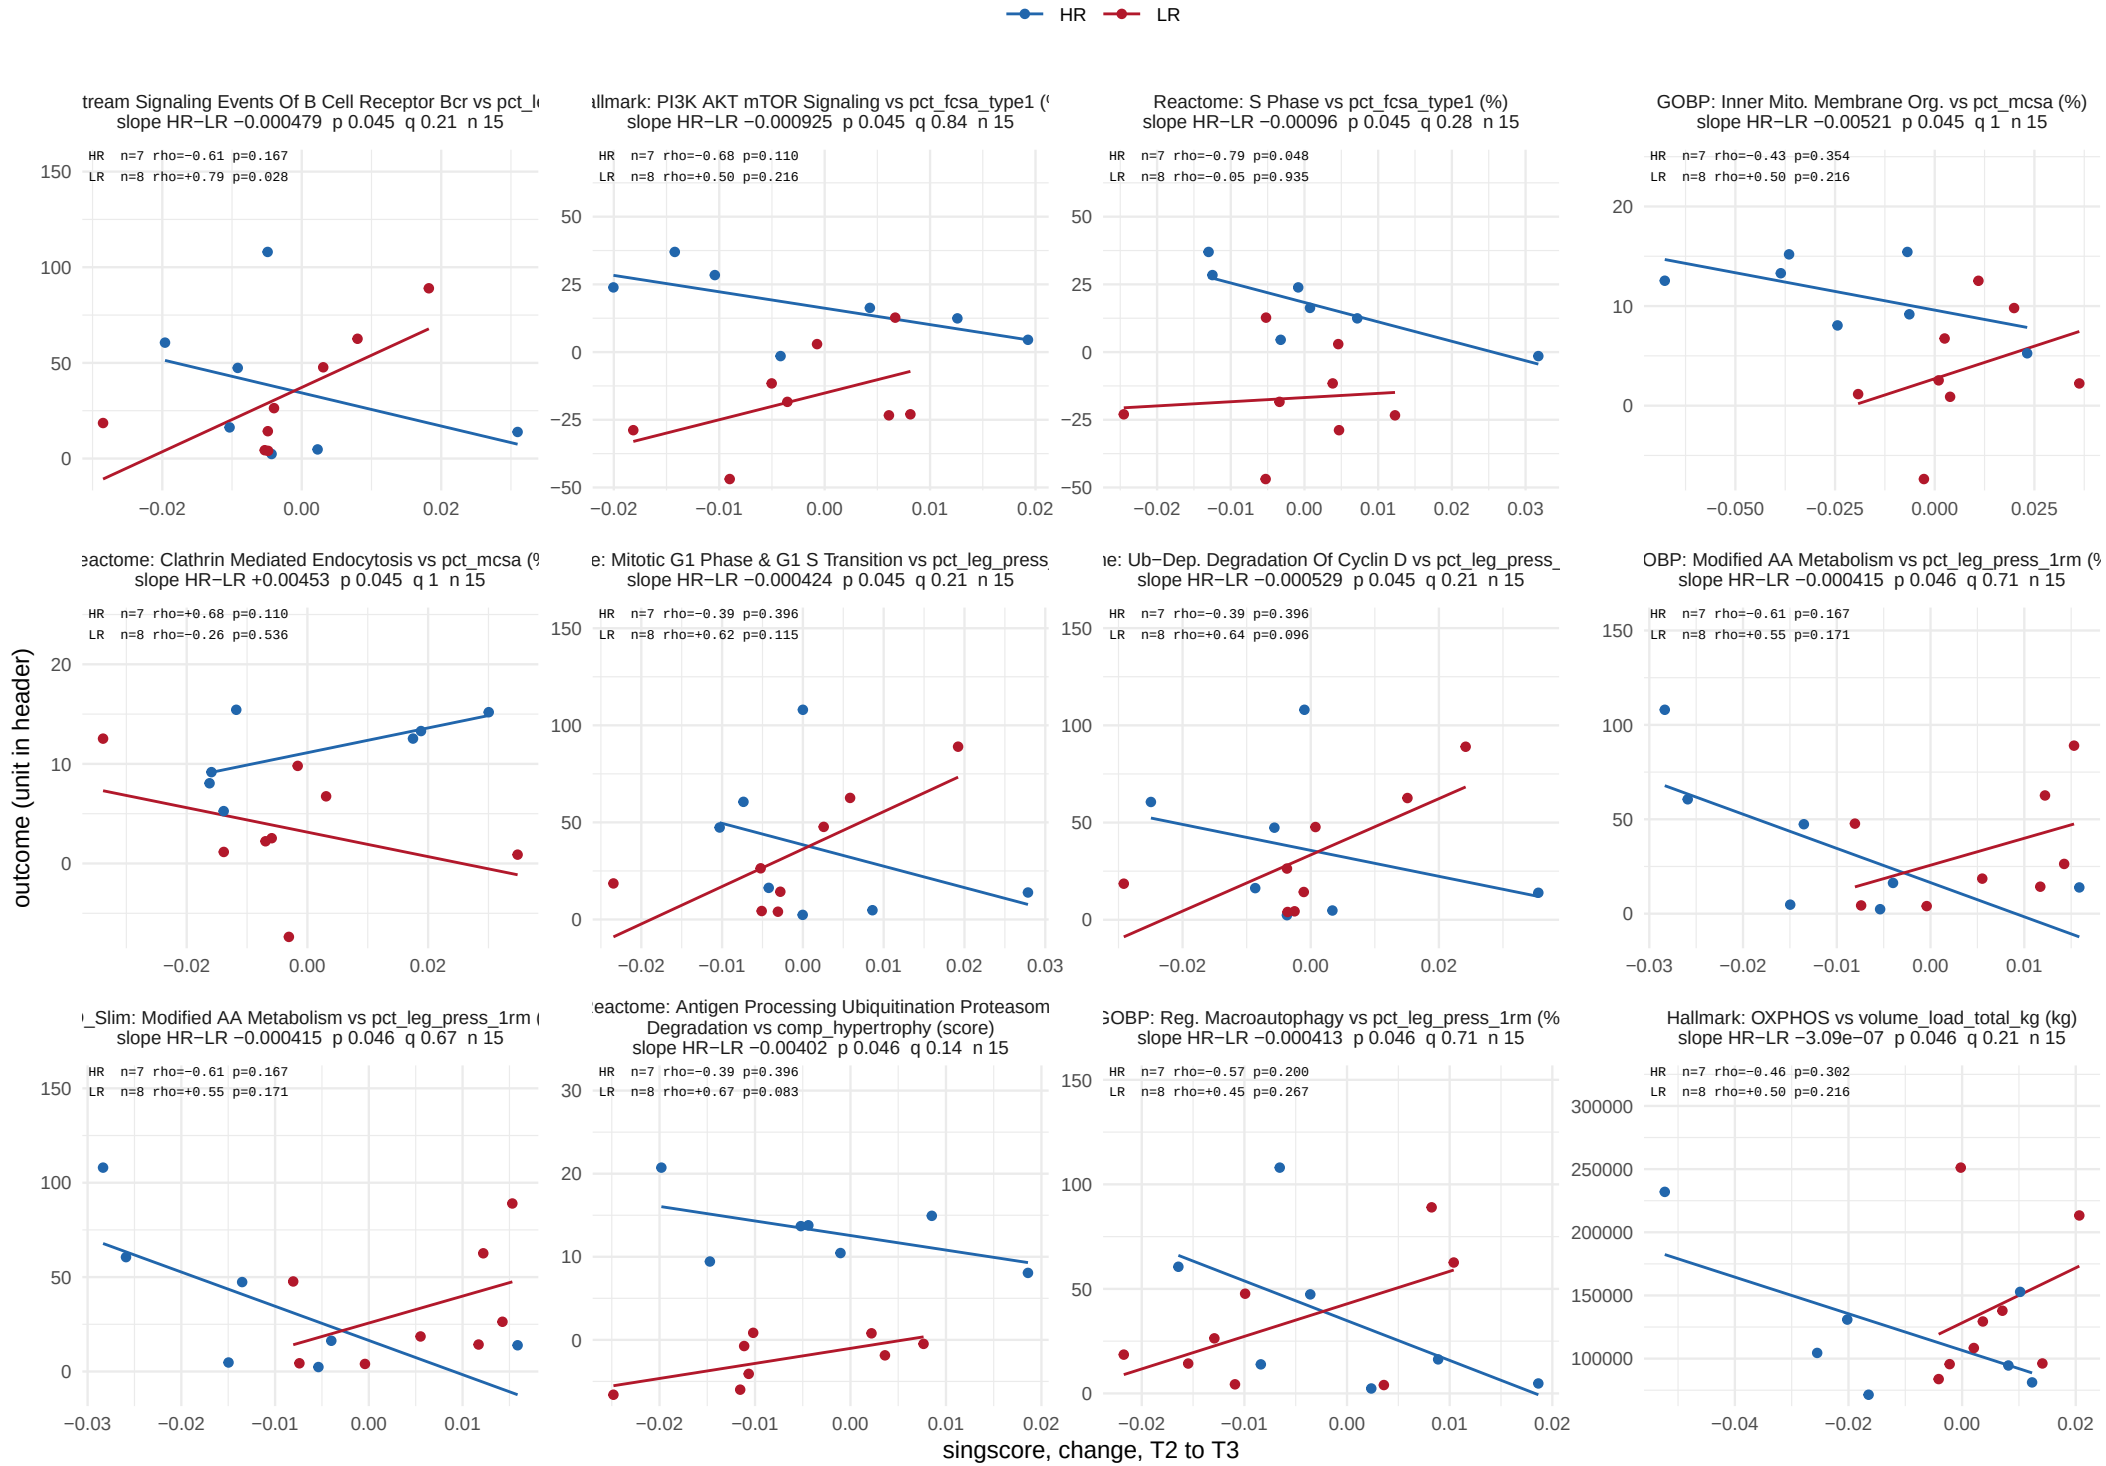


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, acute window


643 of 11024 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 50 of 54.

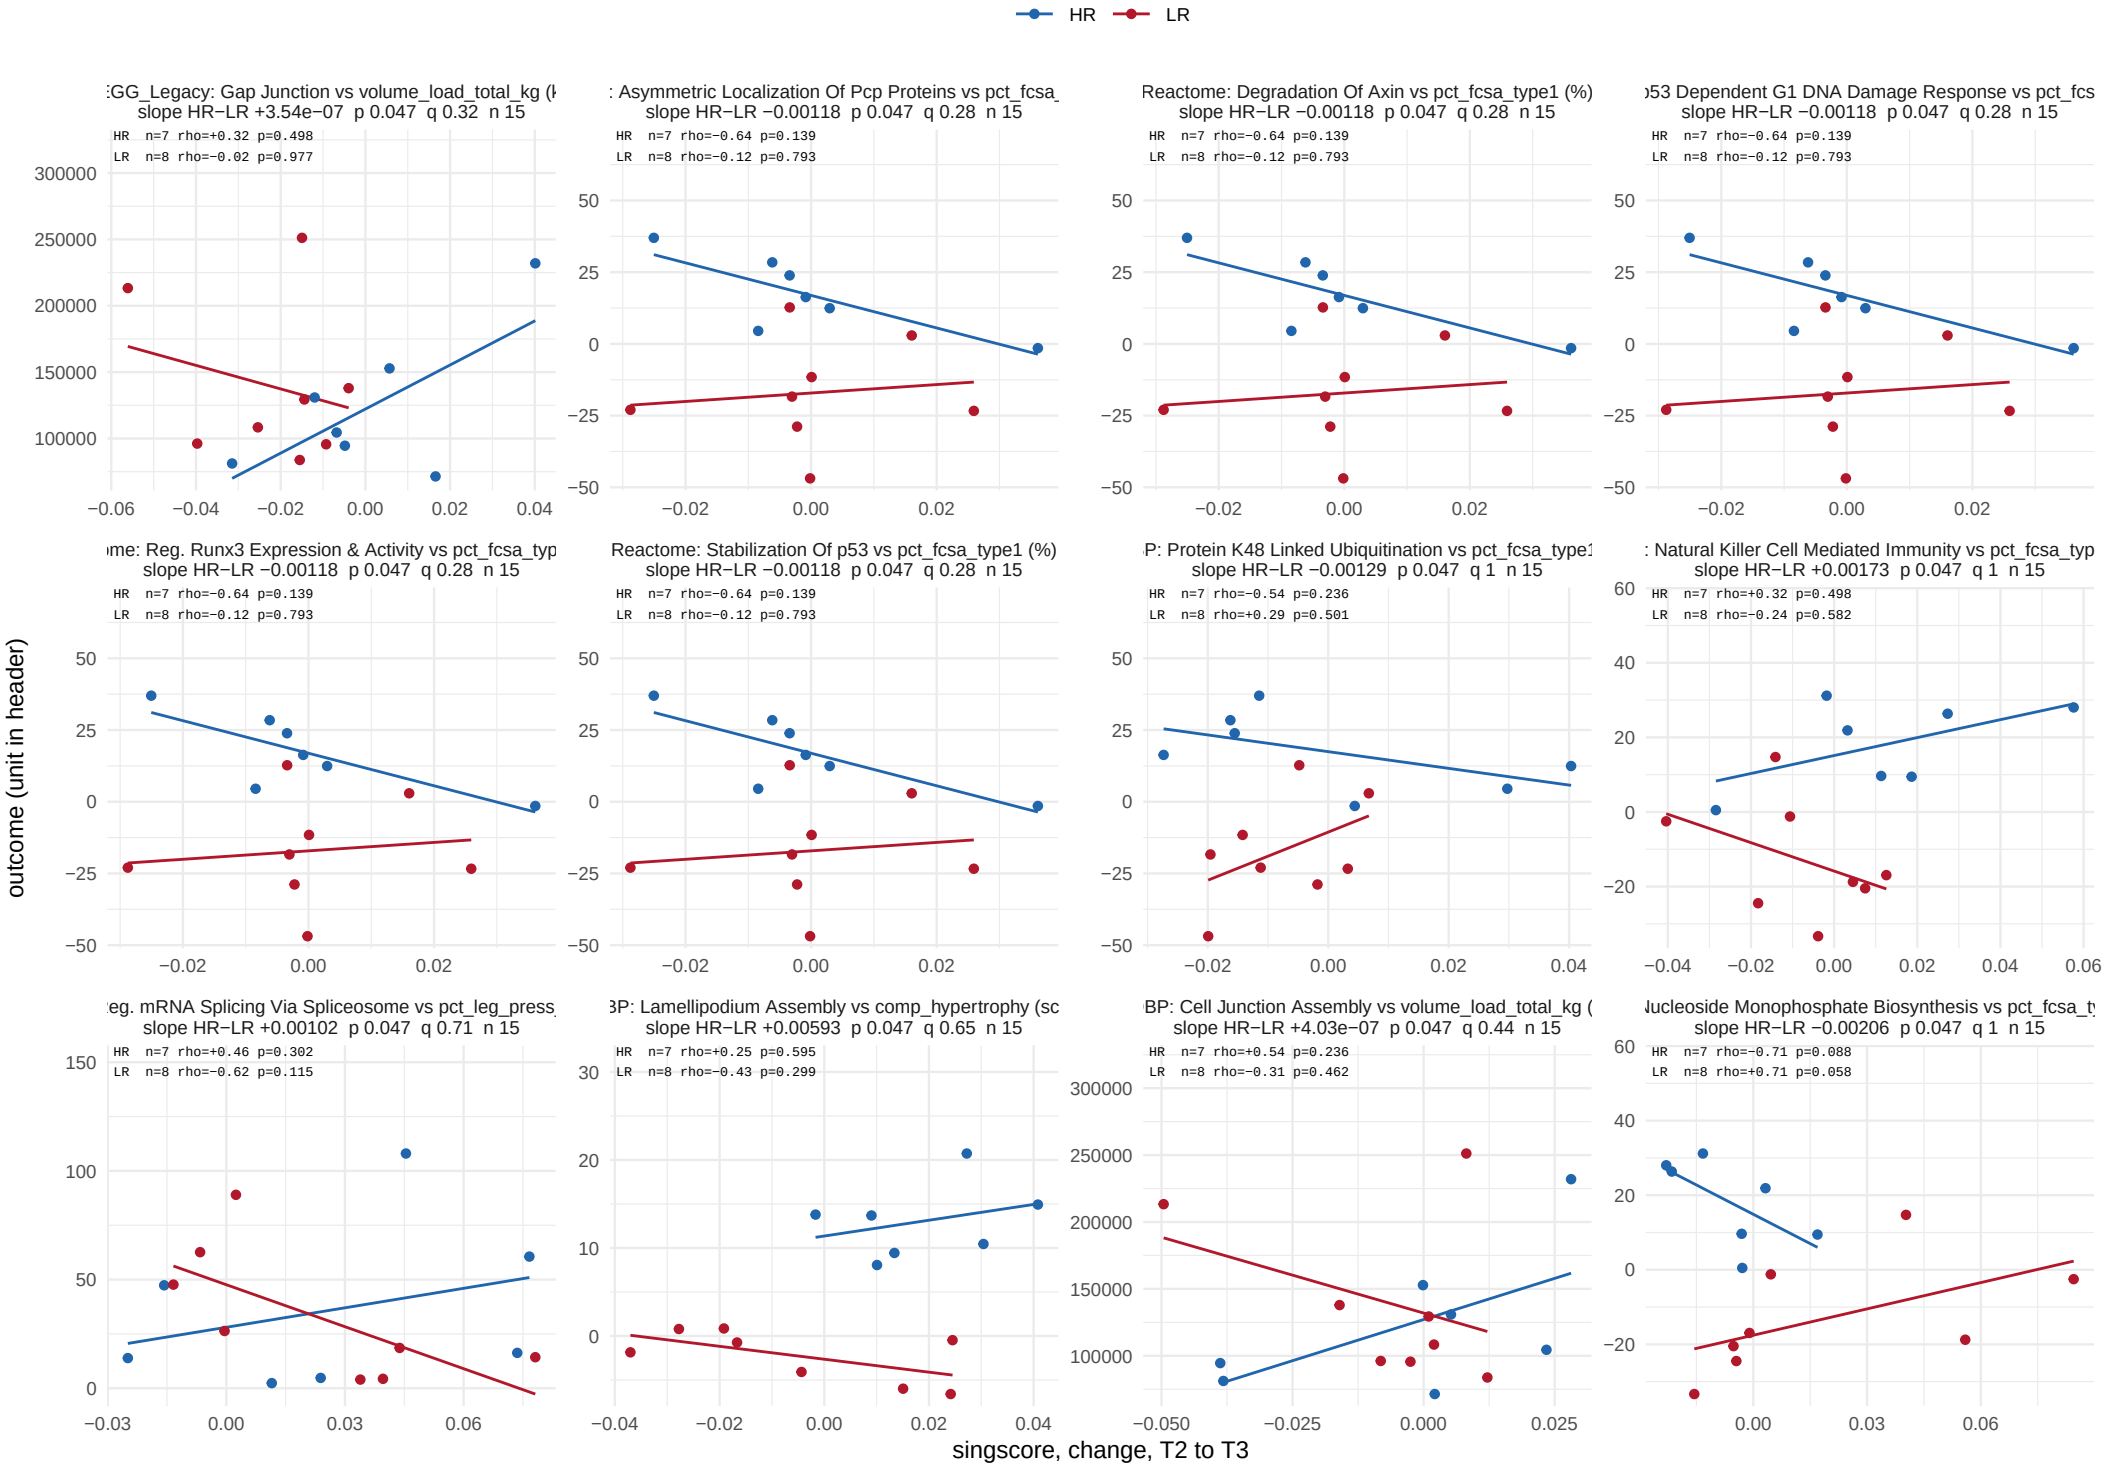


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

# Arm difference, acute window


643 of 11024 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 51 of 54.

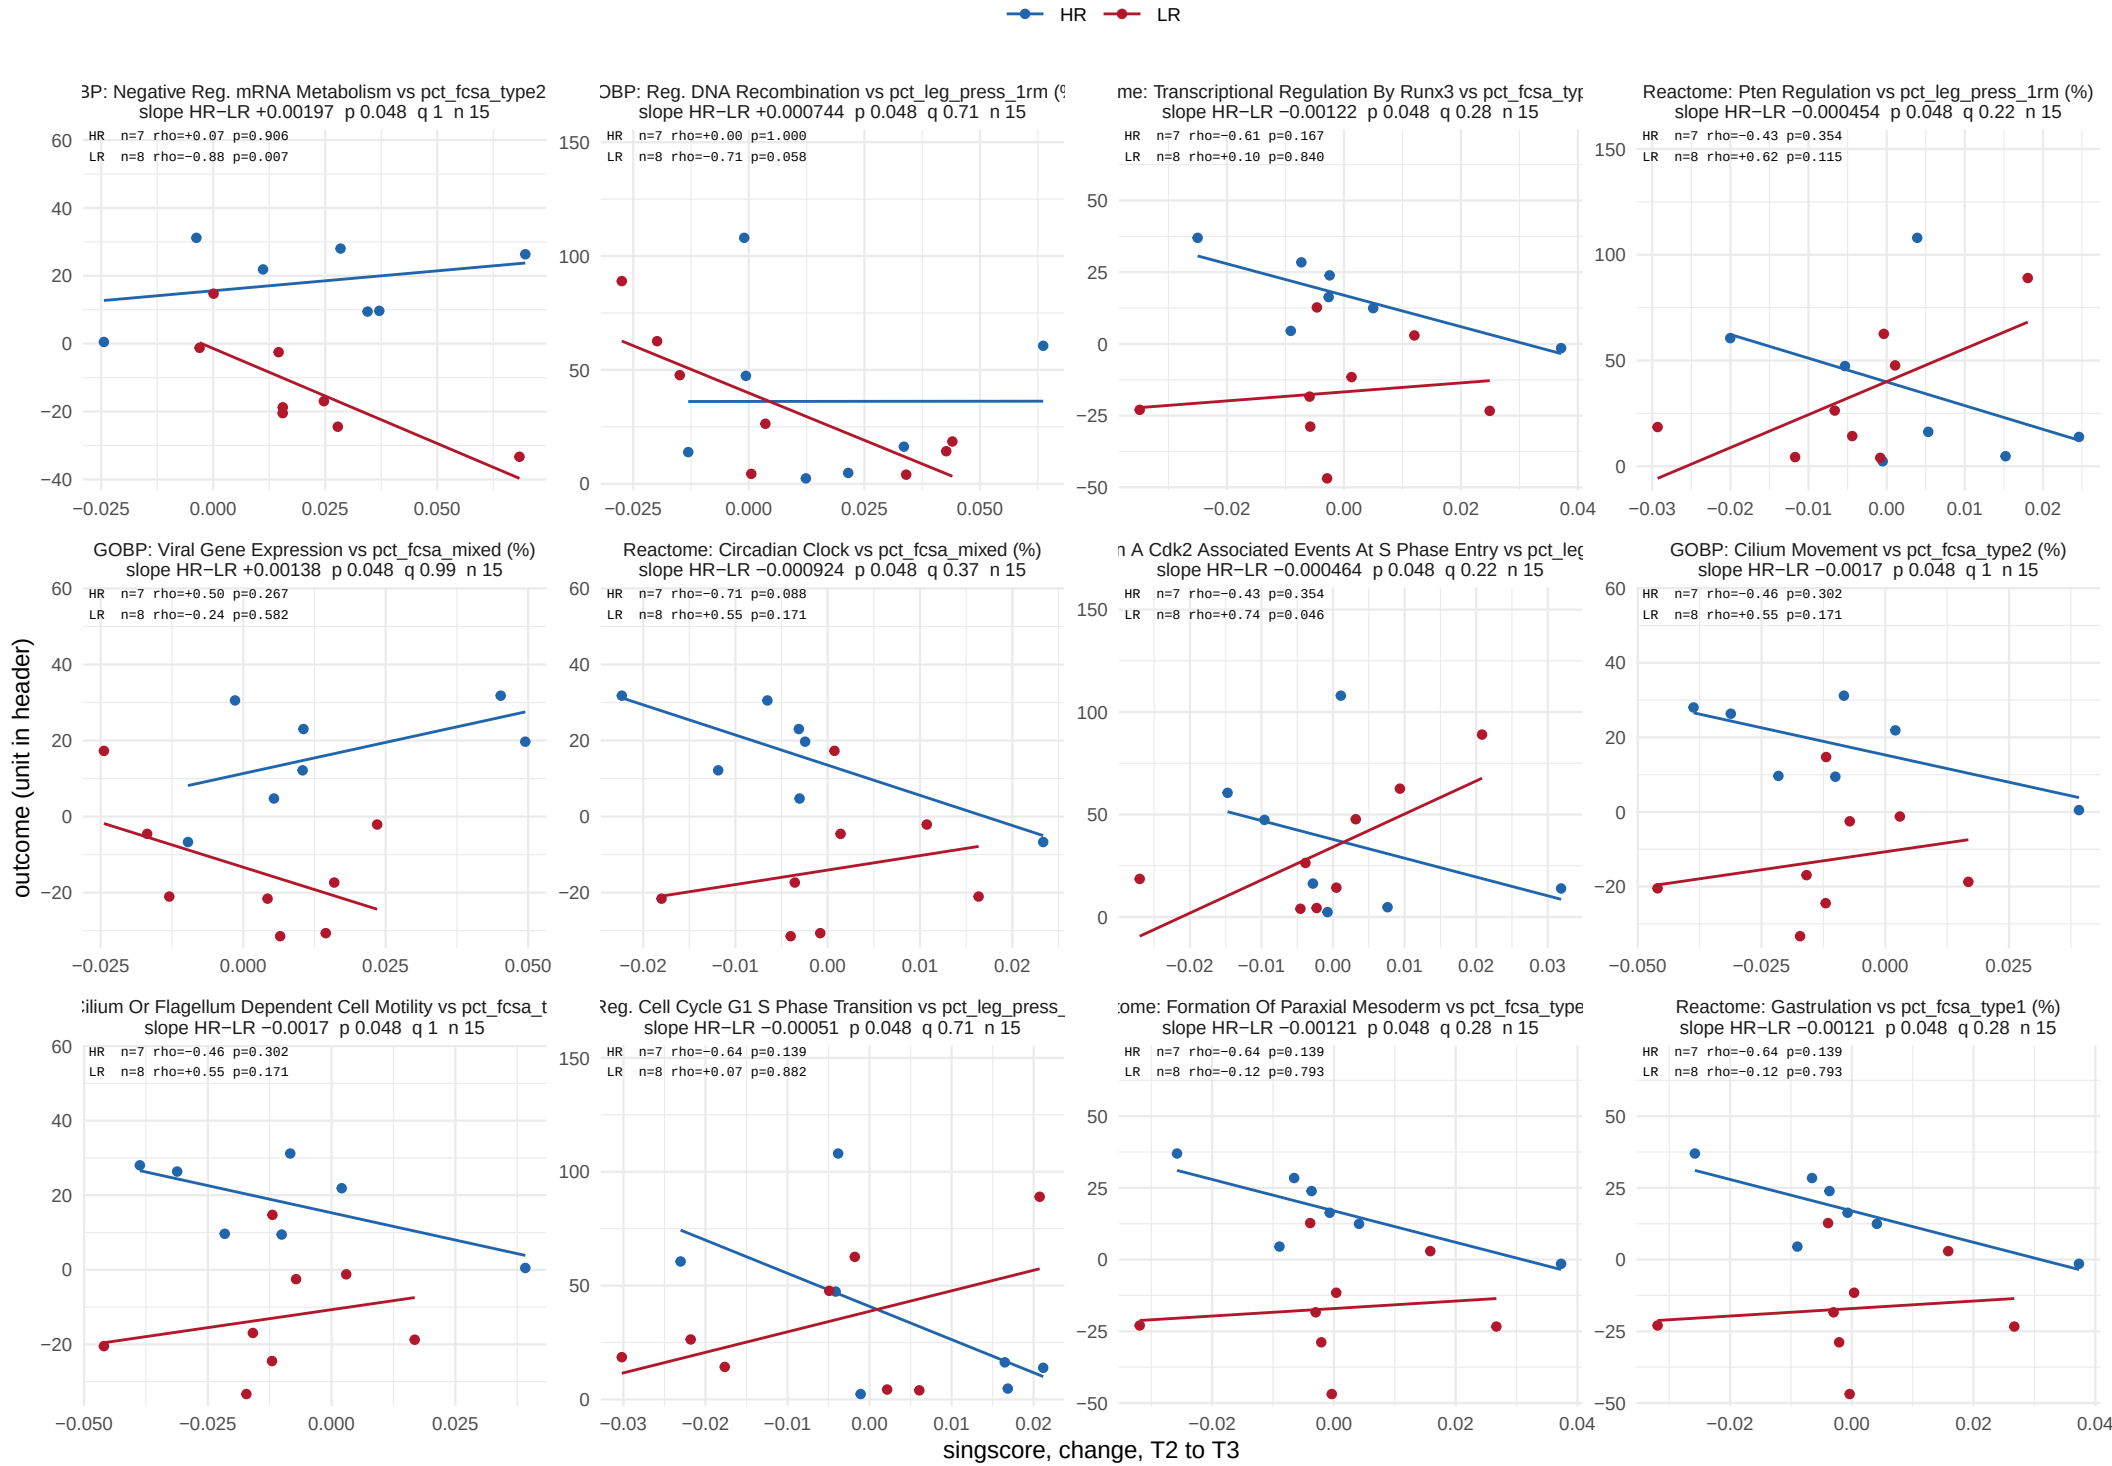


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, acute window


643 of 11024 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 52 of 54.

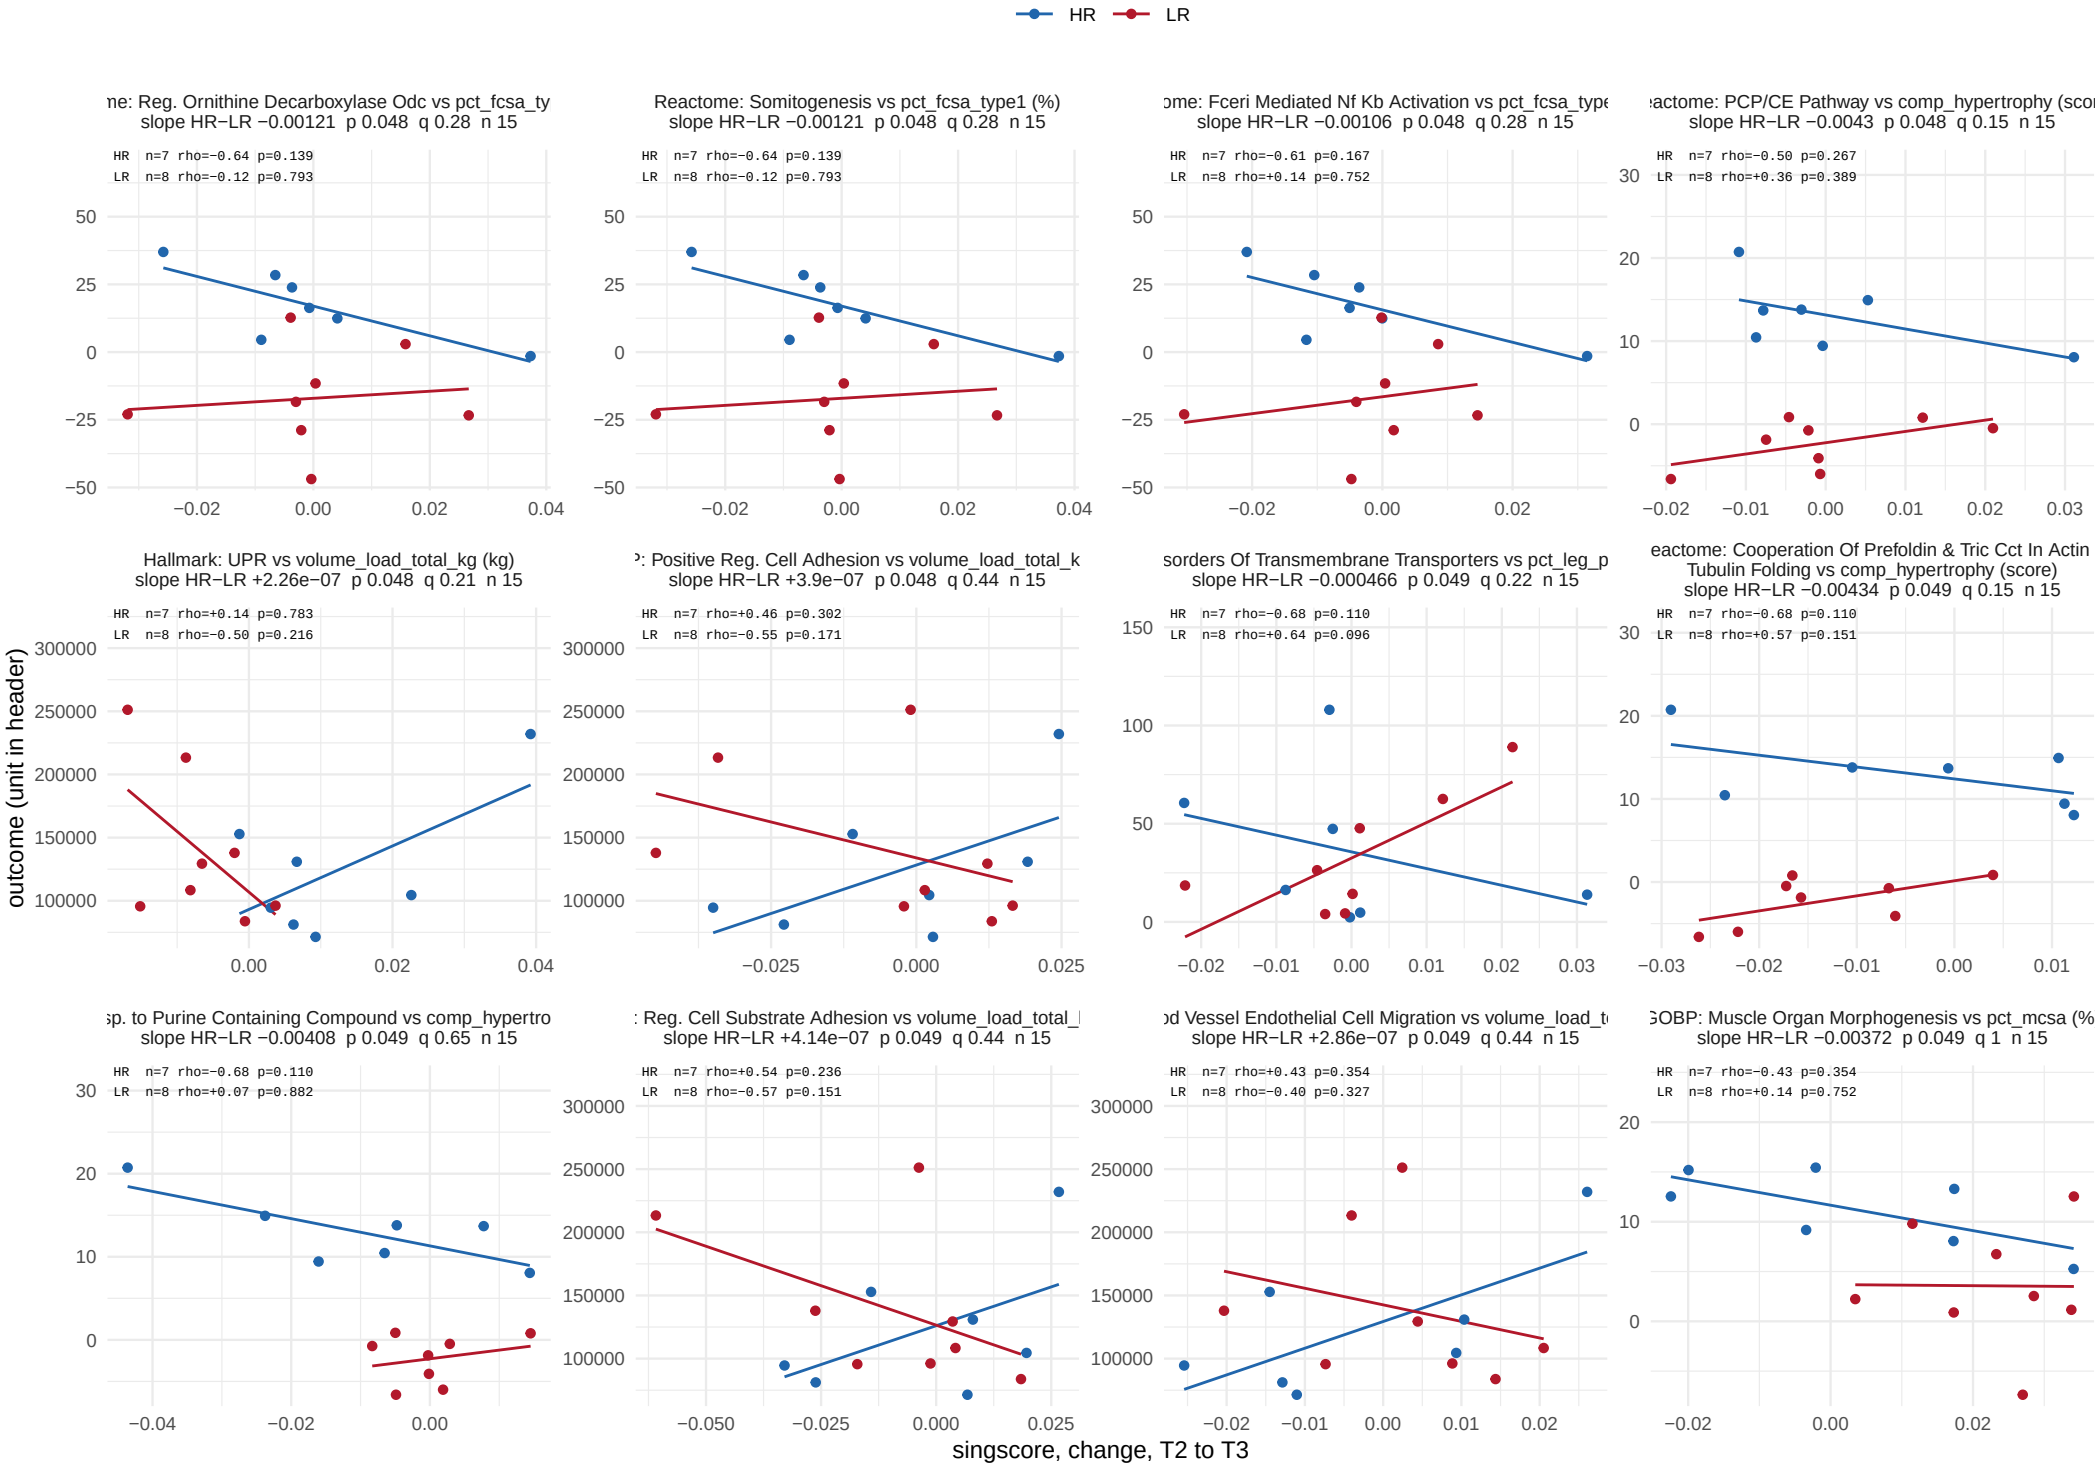


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, acute window


643 of 11024 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 53 of 54.

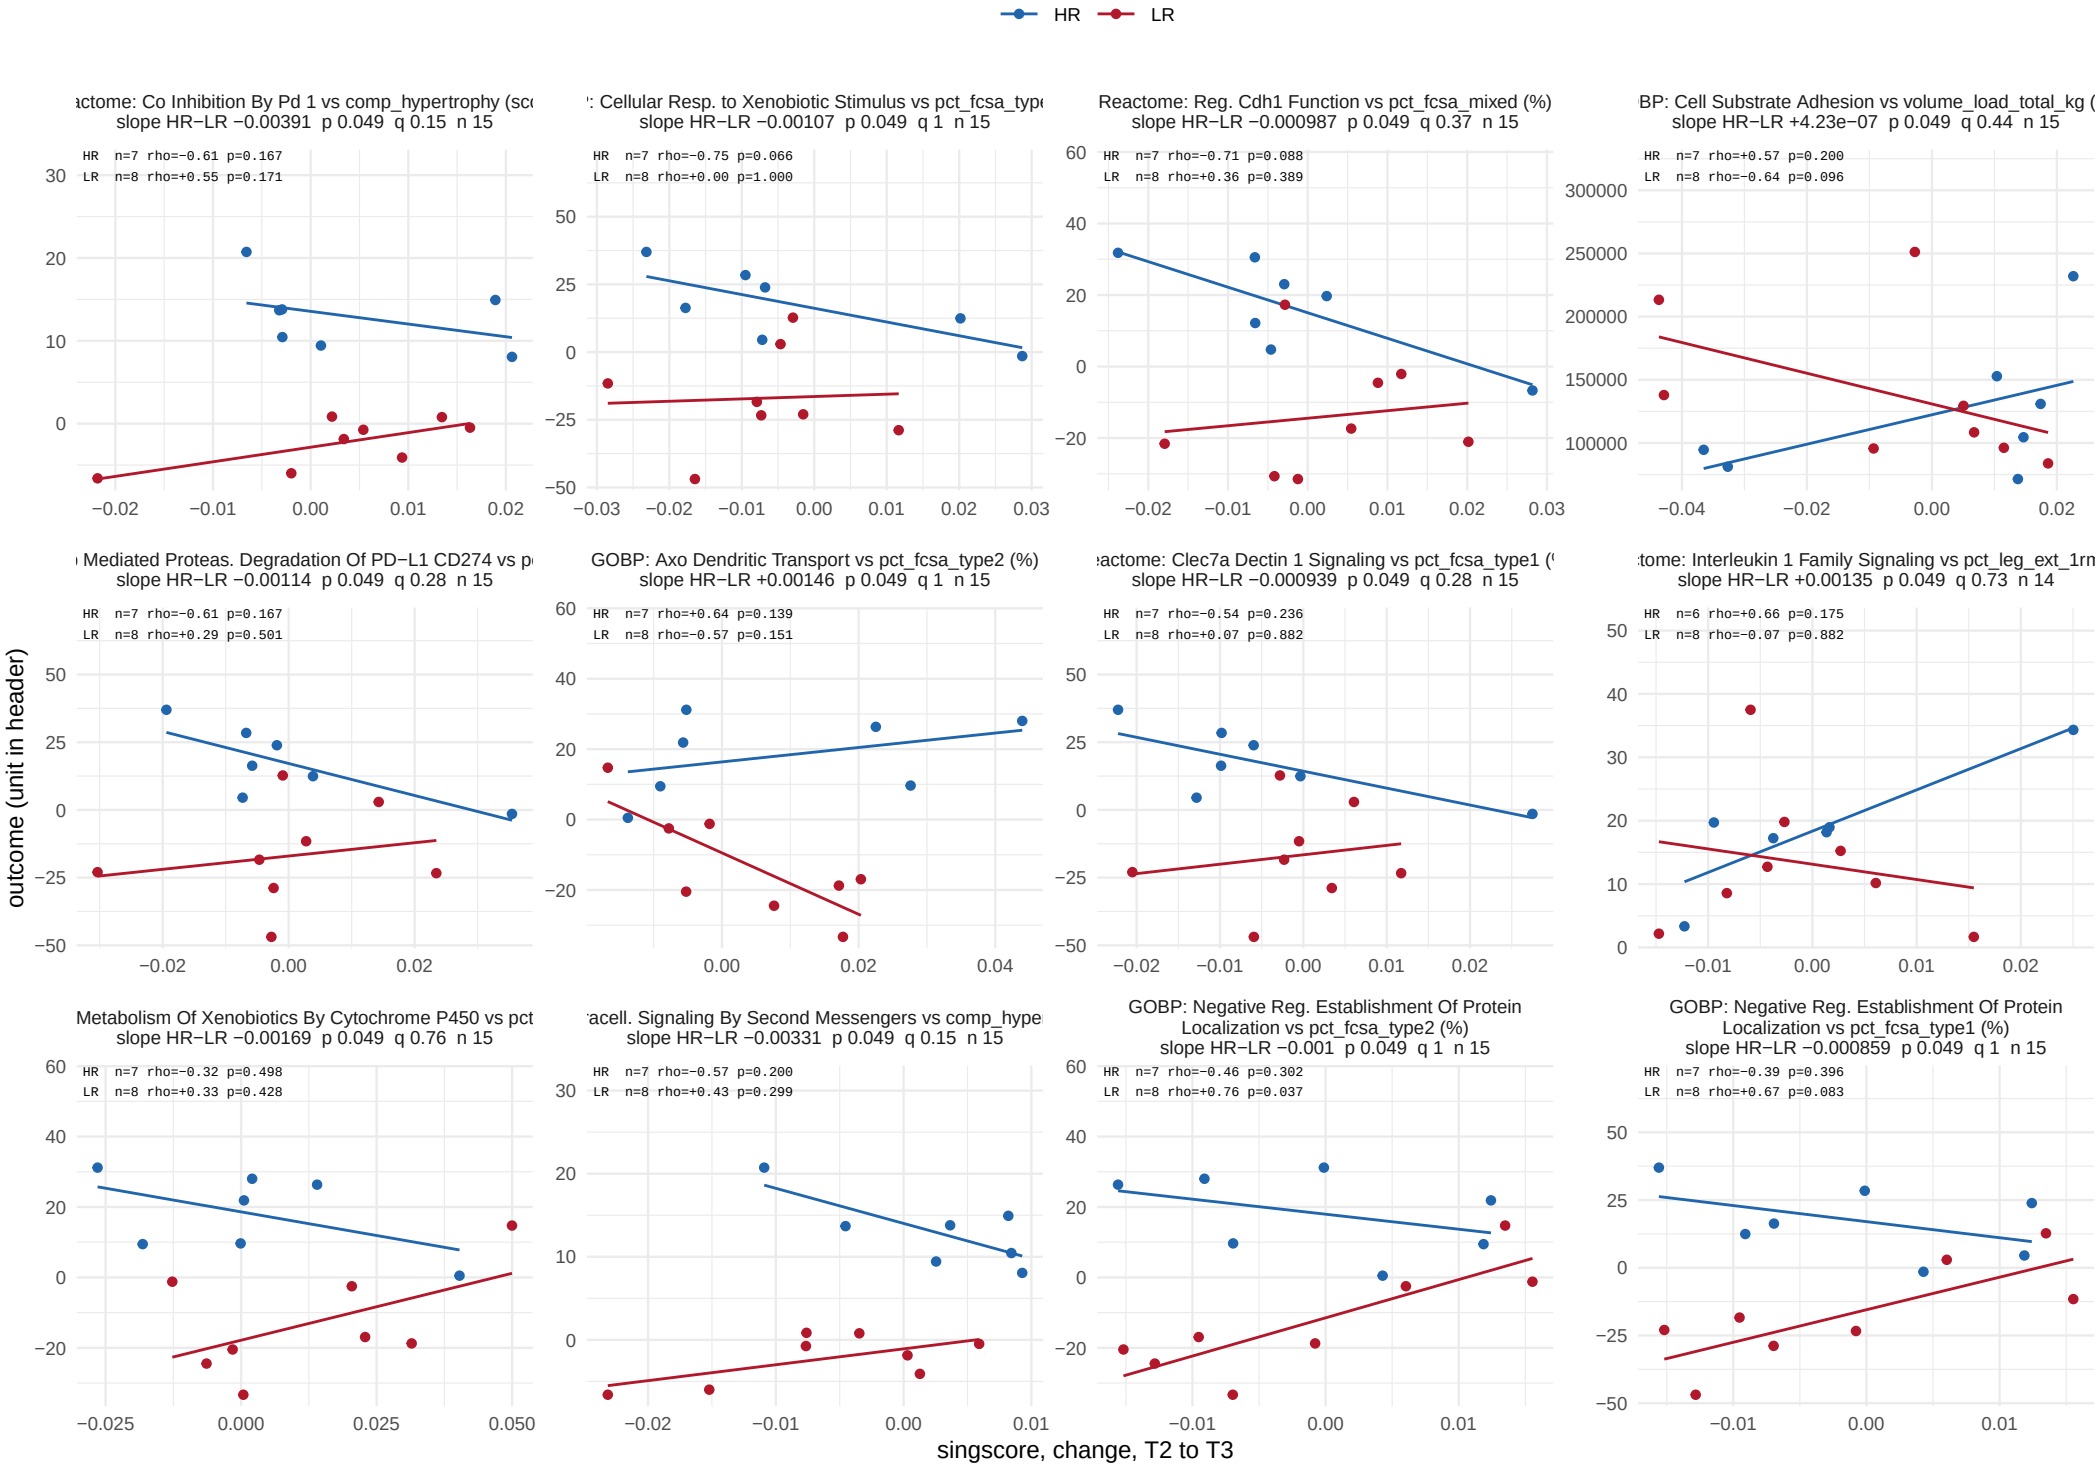


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Arm difference, acute window


643 of 11024 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 54 of 54.

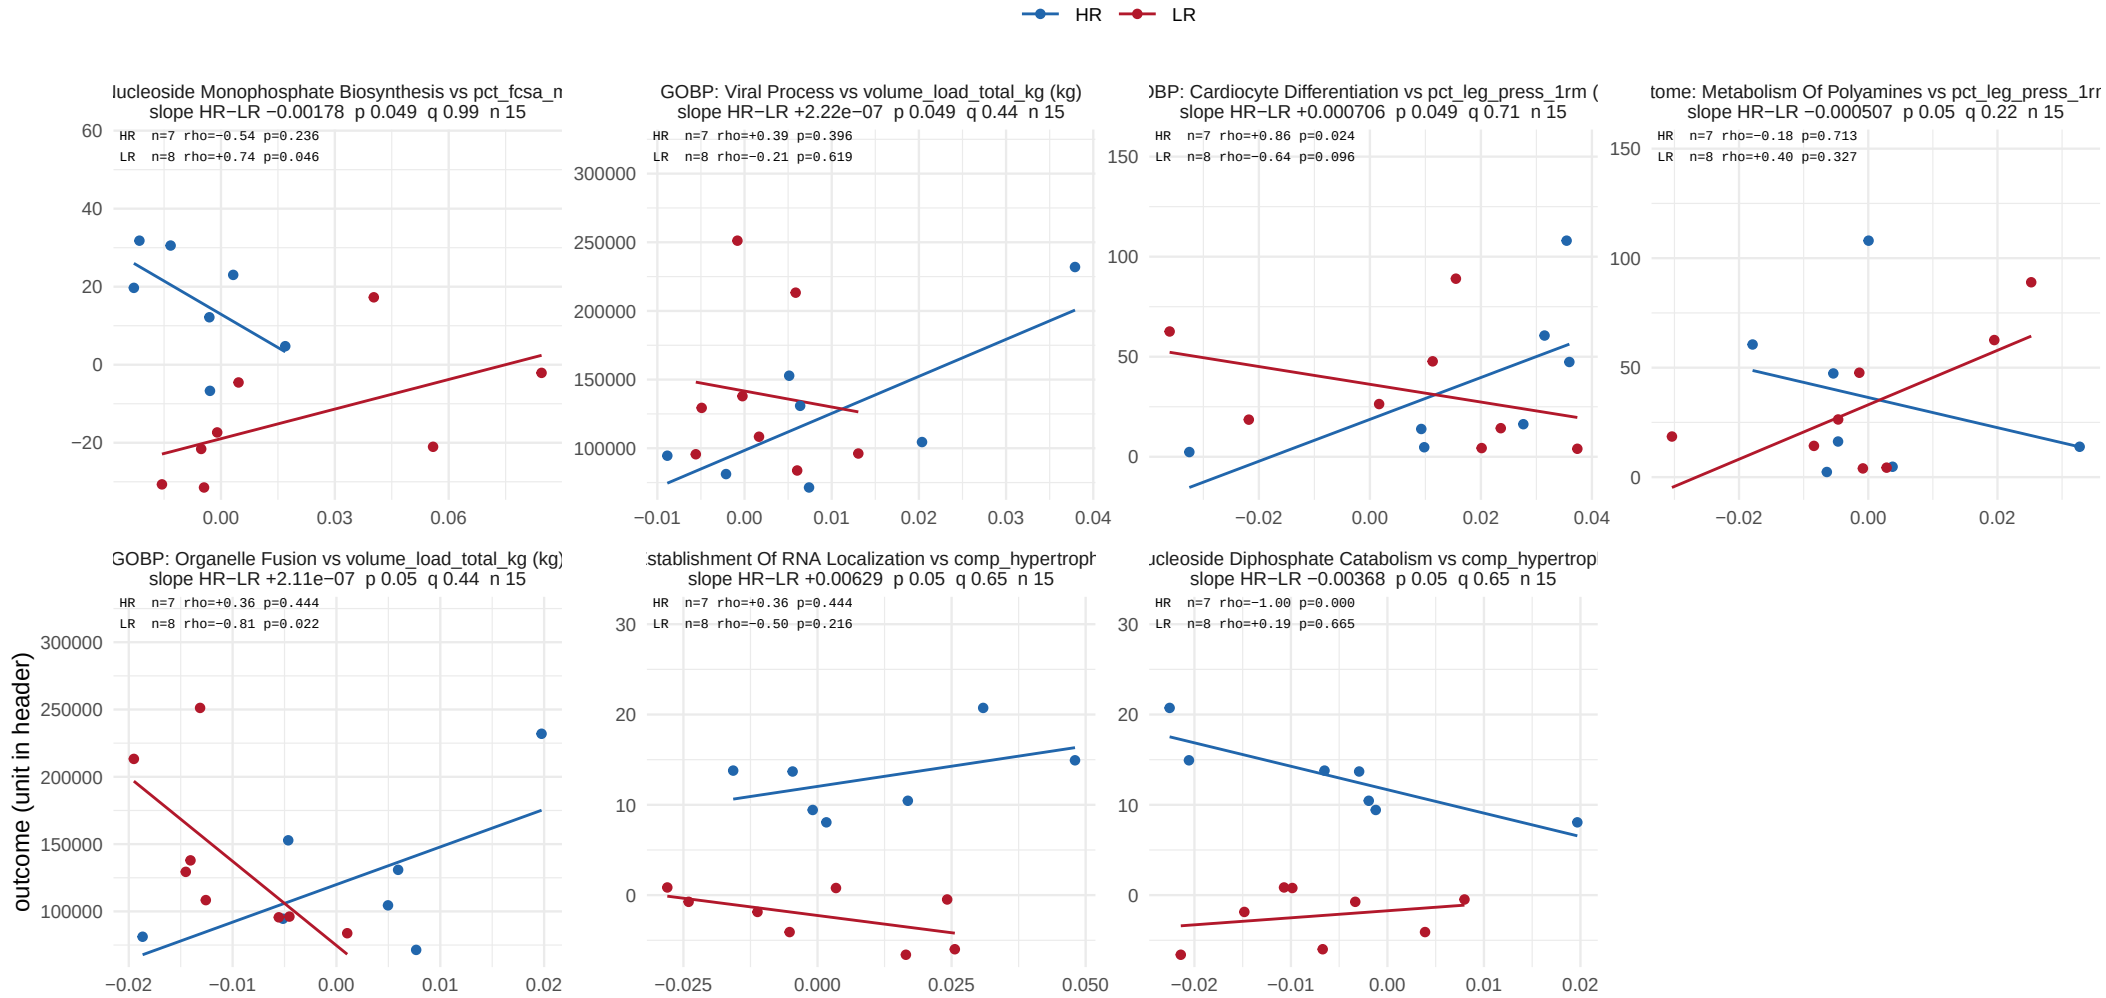


One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome and collection, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

## Two predictor, training window


217 of 5512 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 1 of 19.

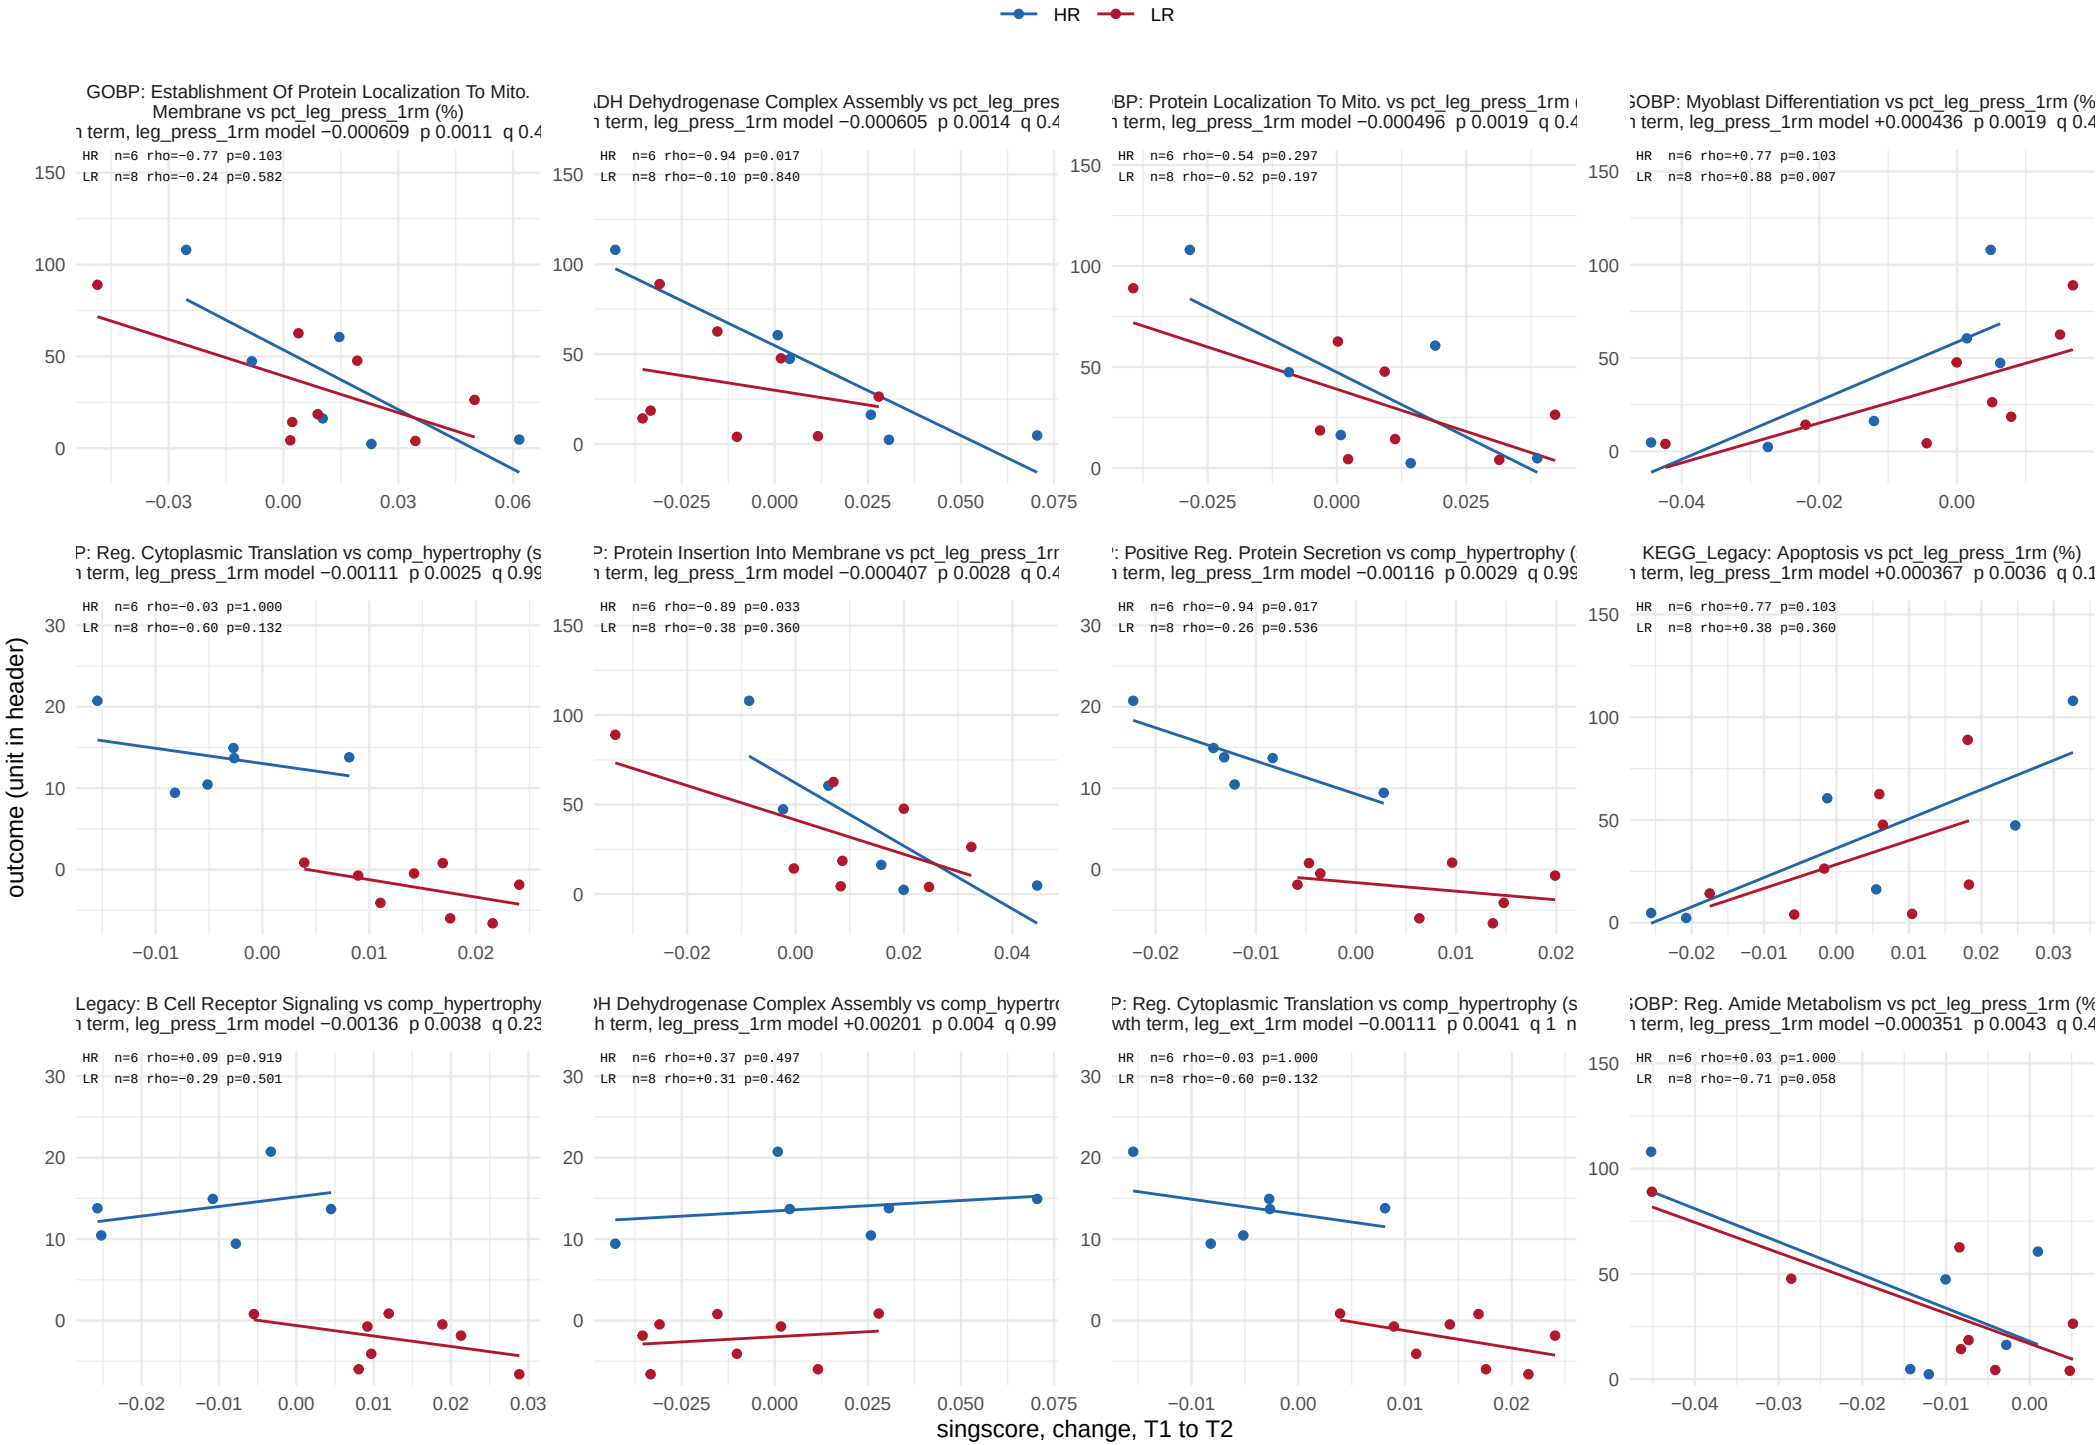


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

## Two predictor, training window


217 of 5512 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 2 of 19.

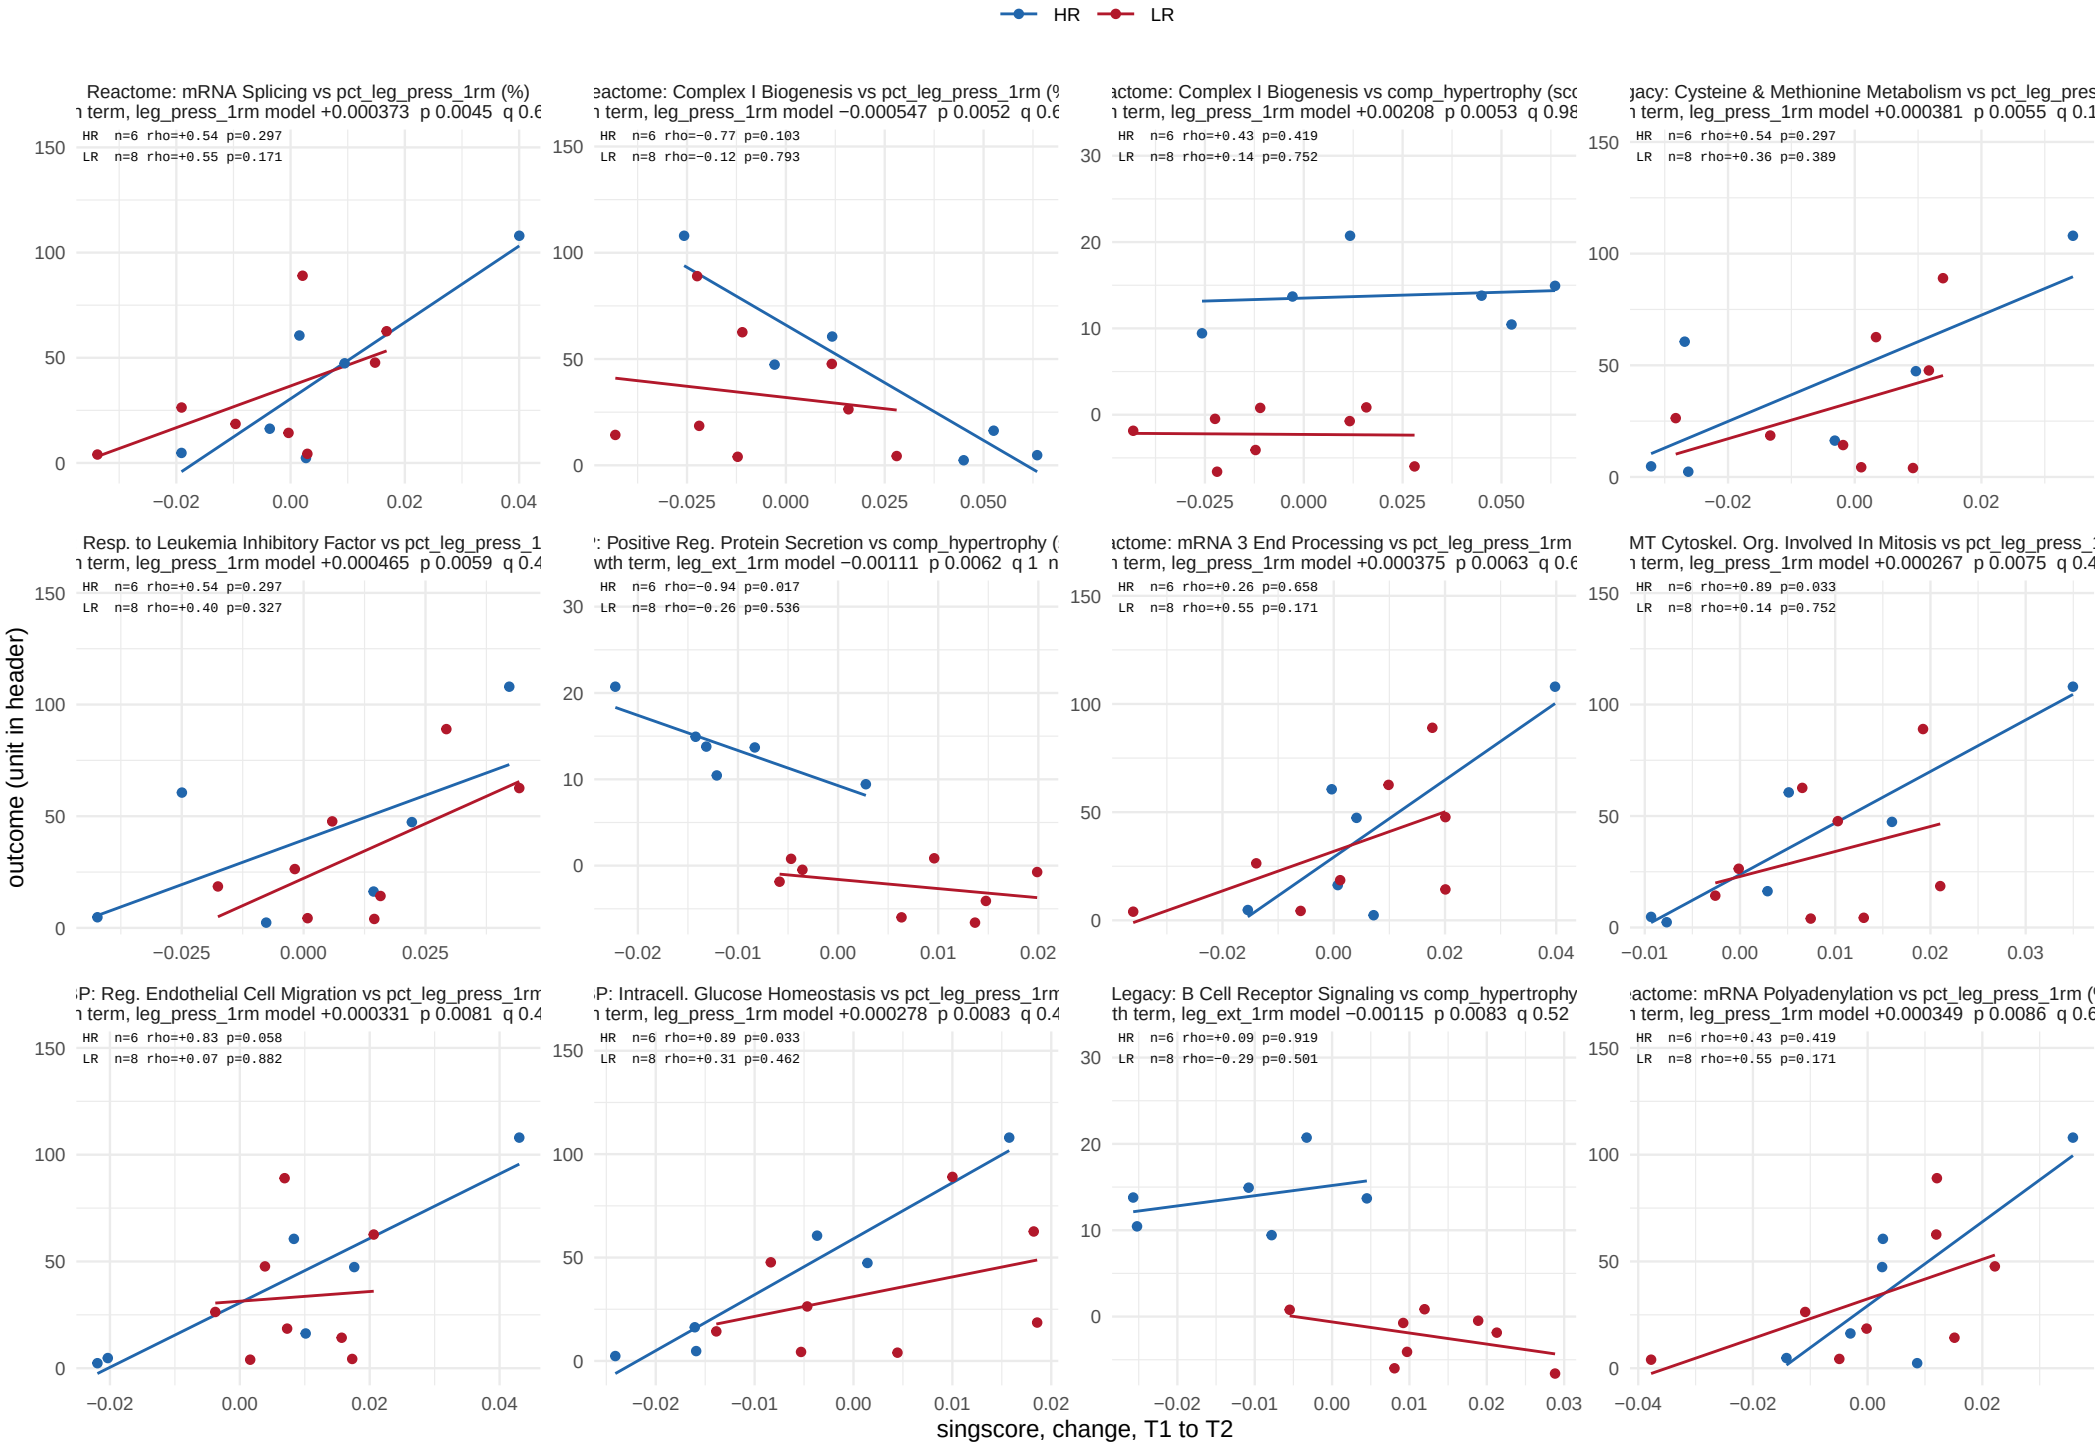


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

## Two predictor, training window


217 of 5512 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 3 of 19.

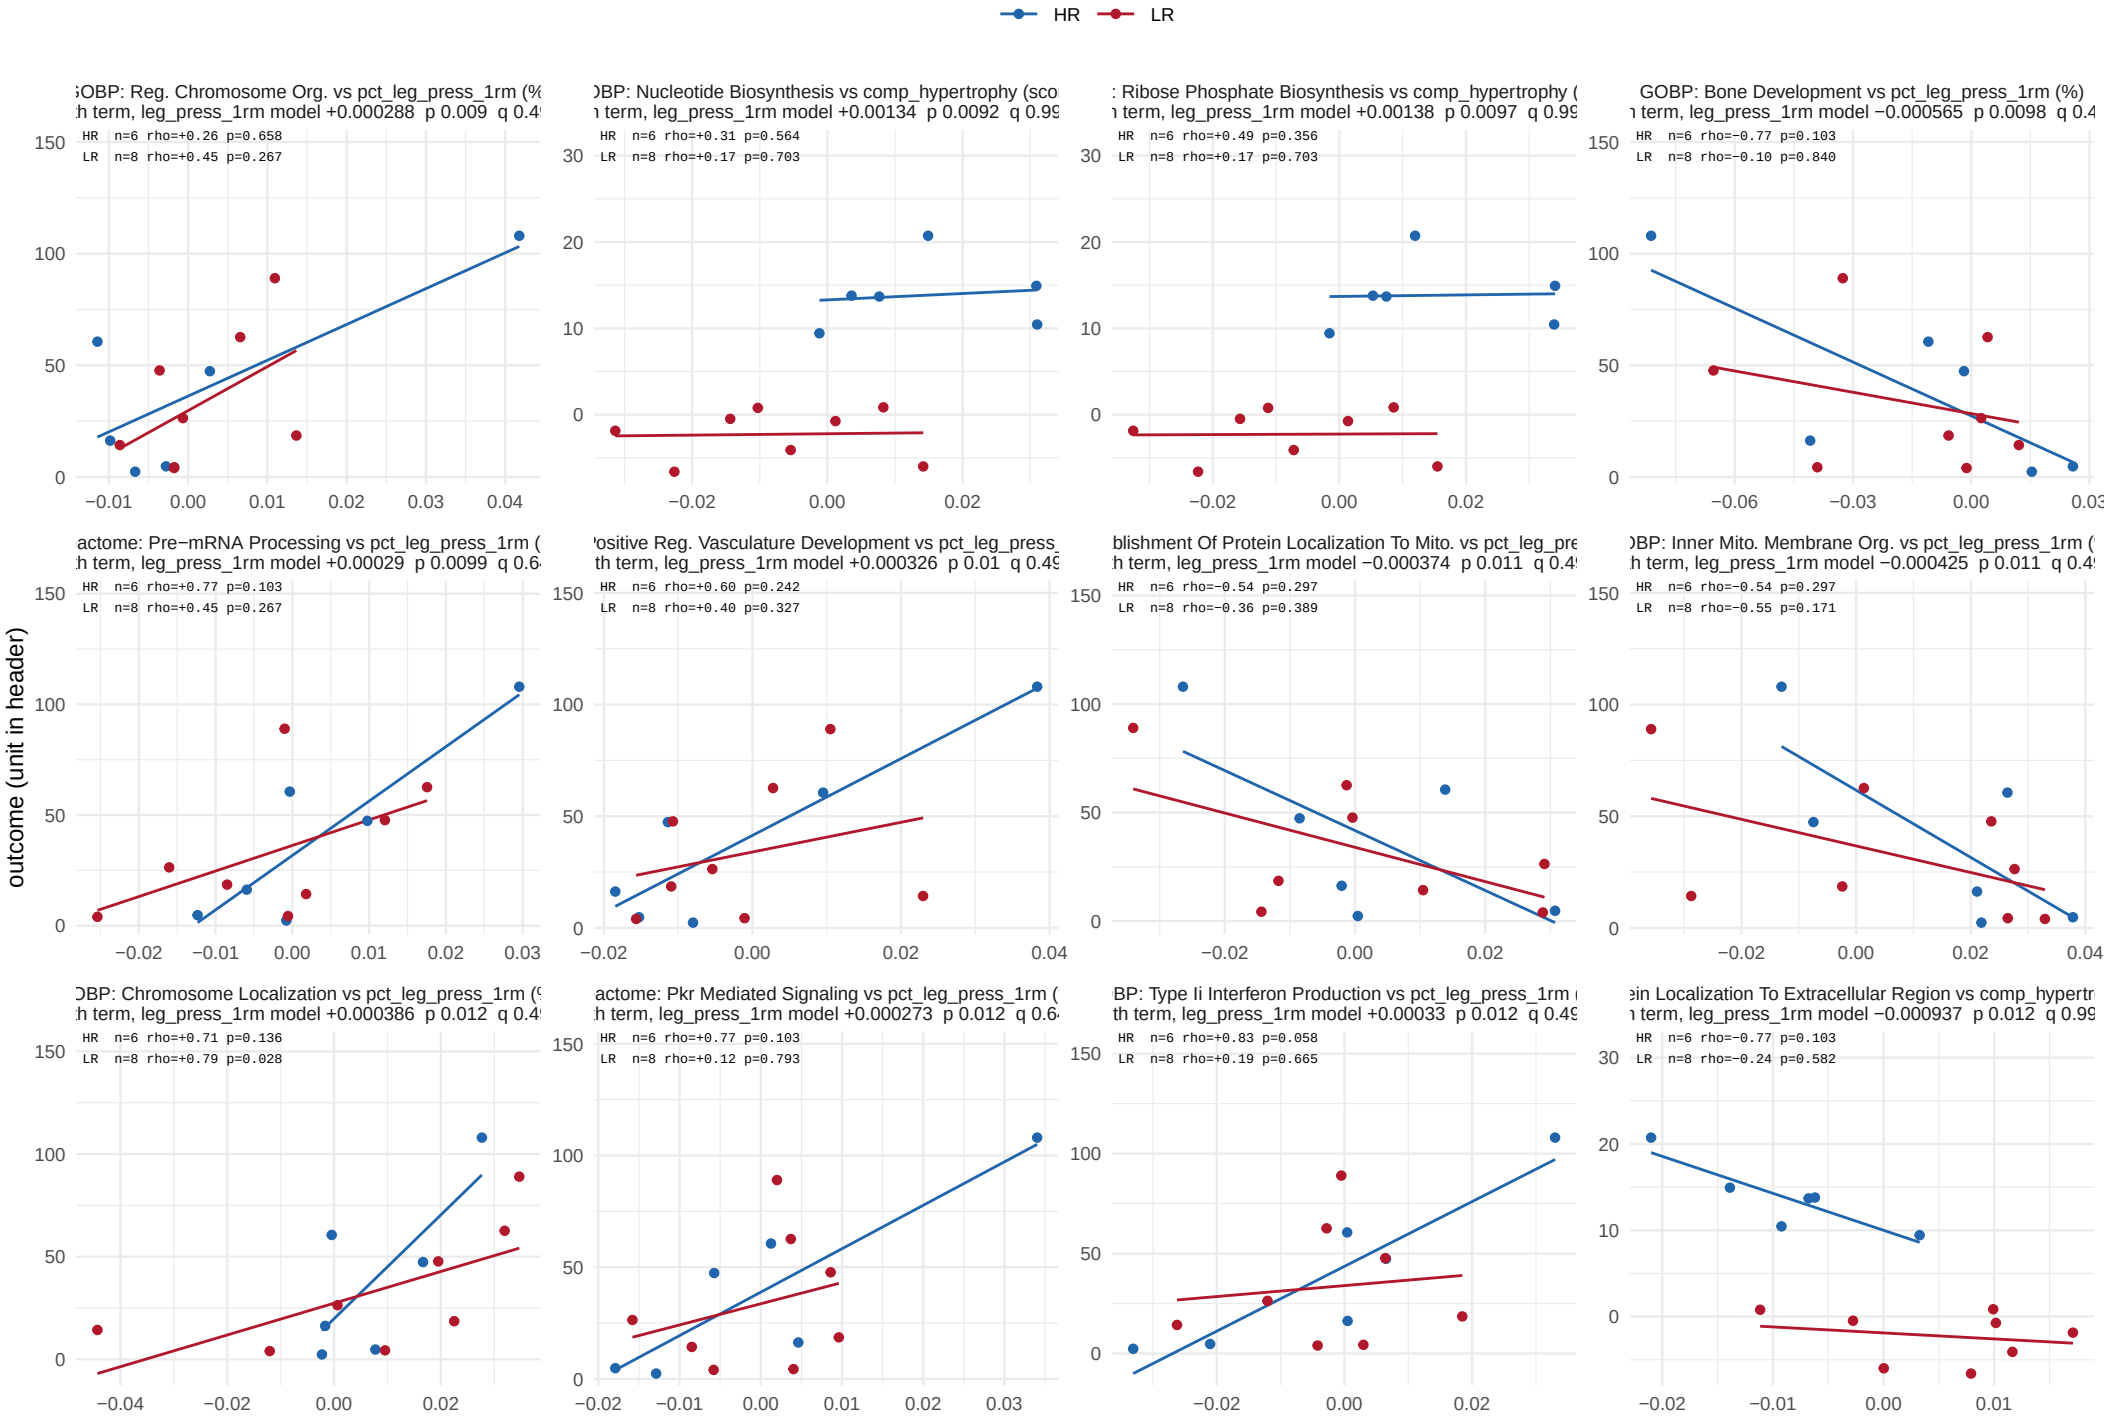


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

## Two predictor, training window


217 of 5512 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 4 of 19.

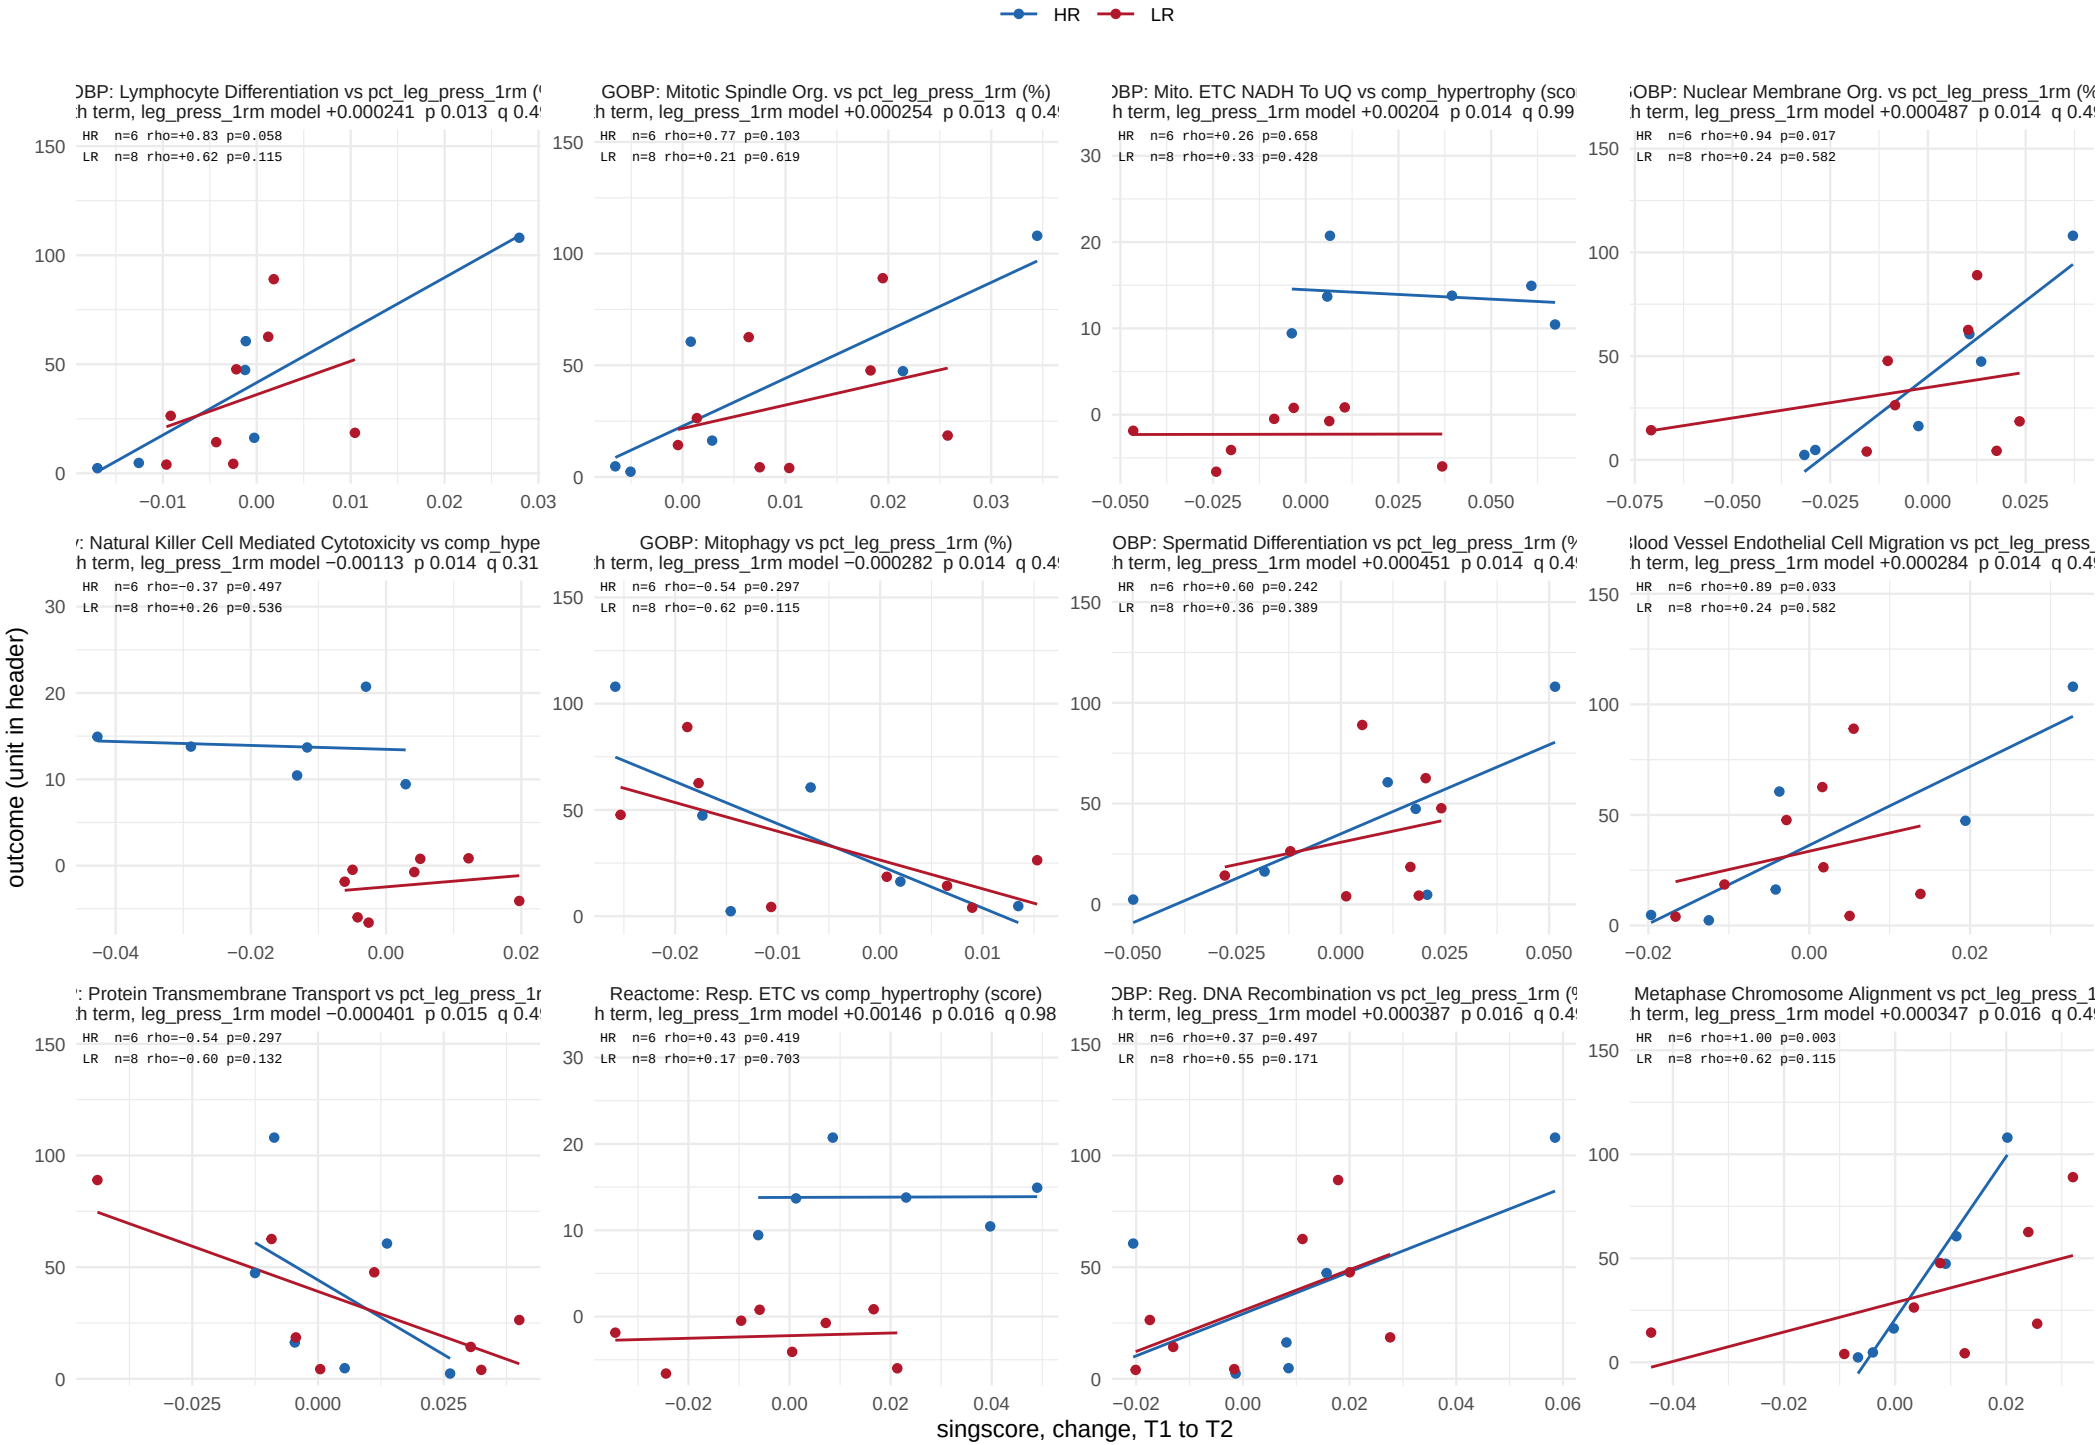


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

## Two predictor, training window


217 of 5512 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 5 of 19.

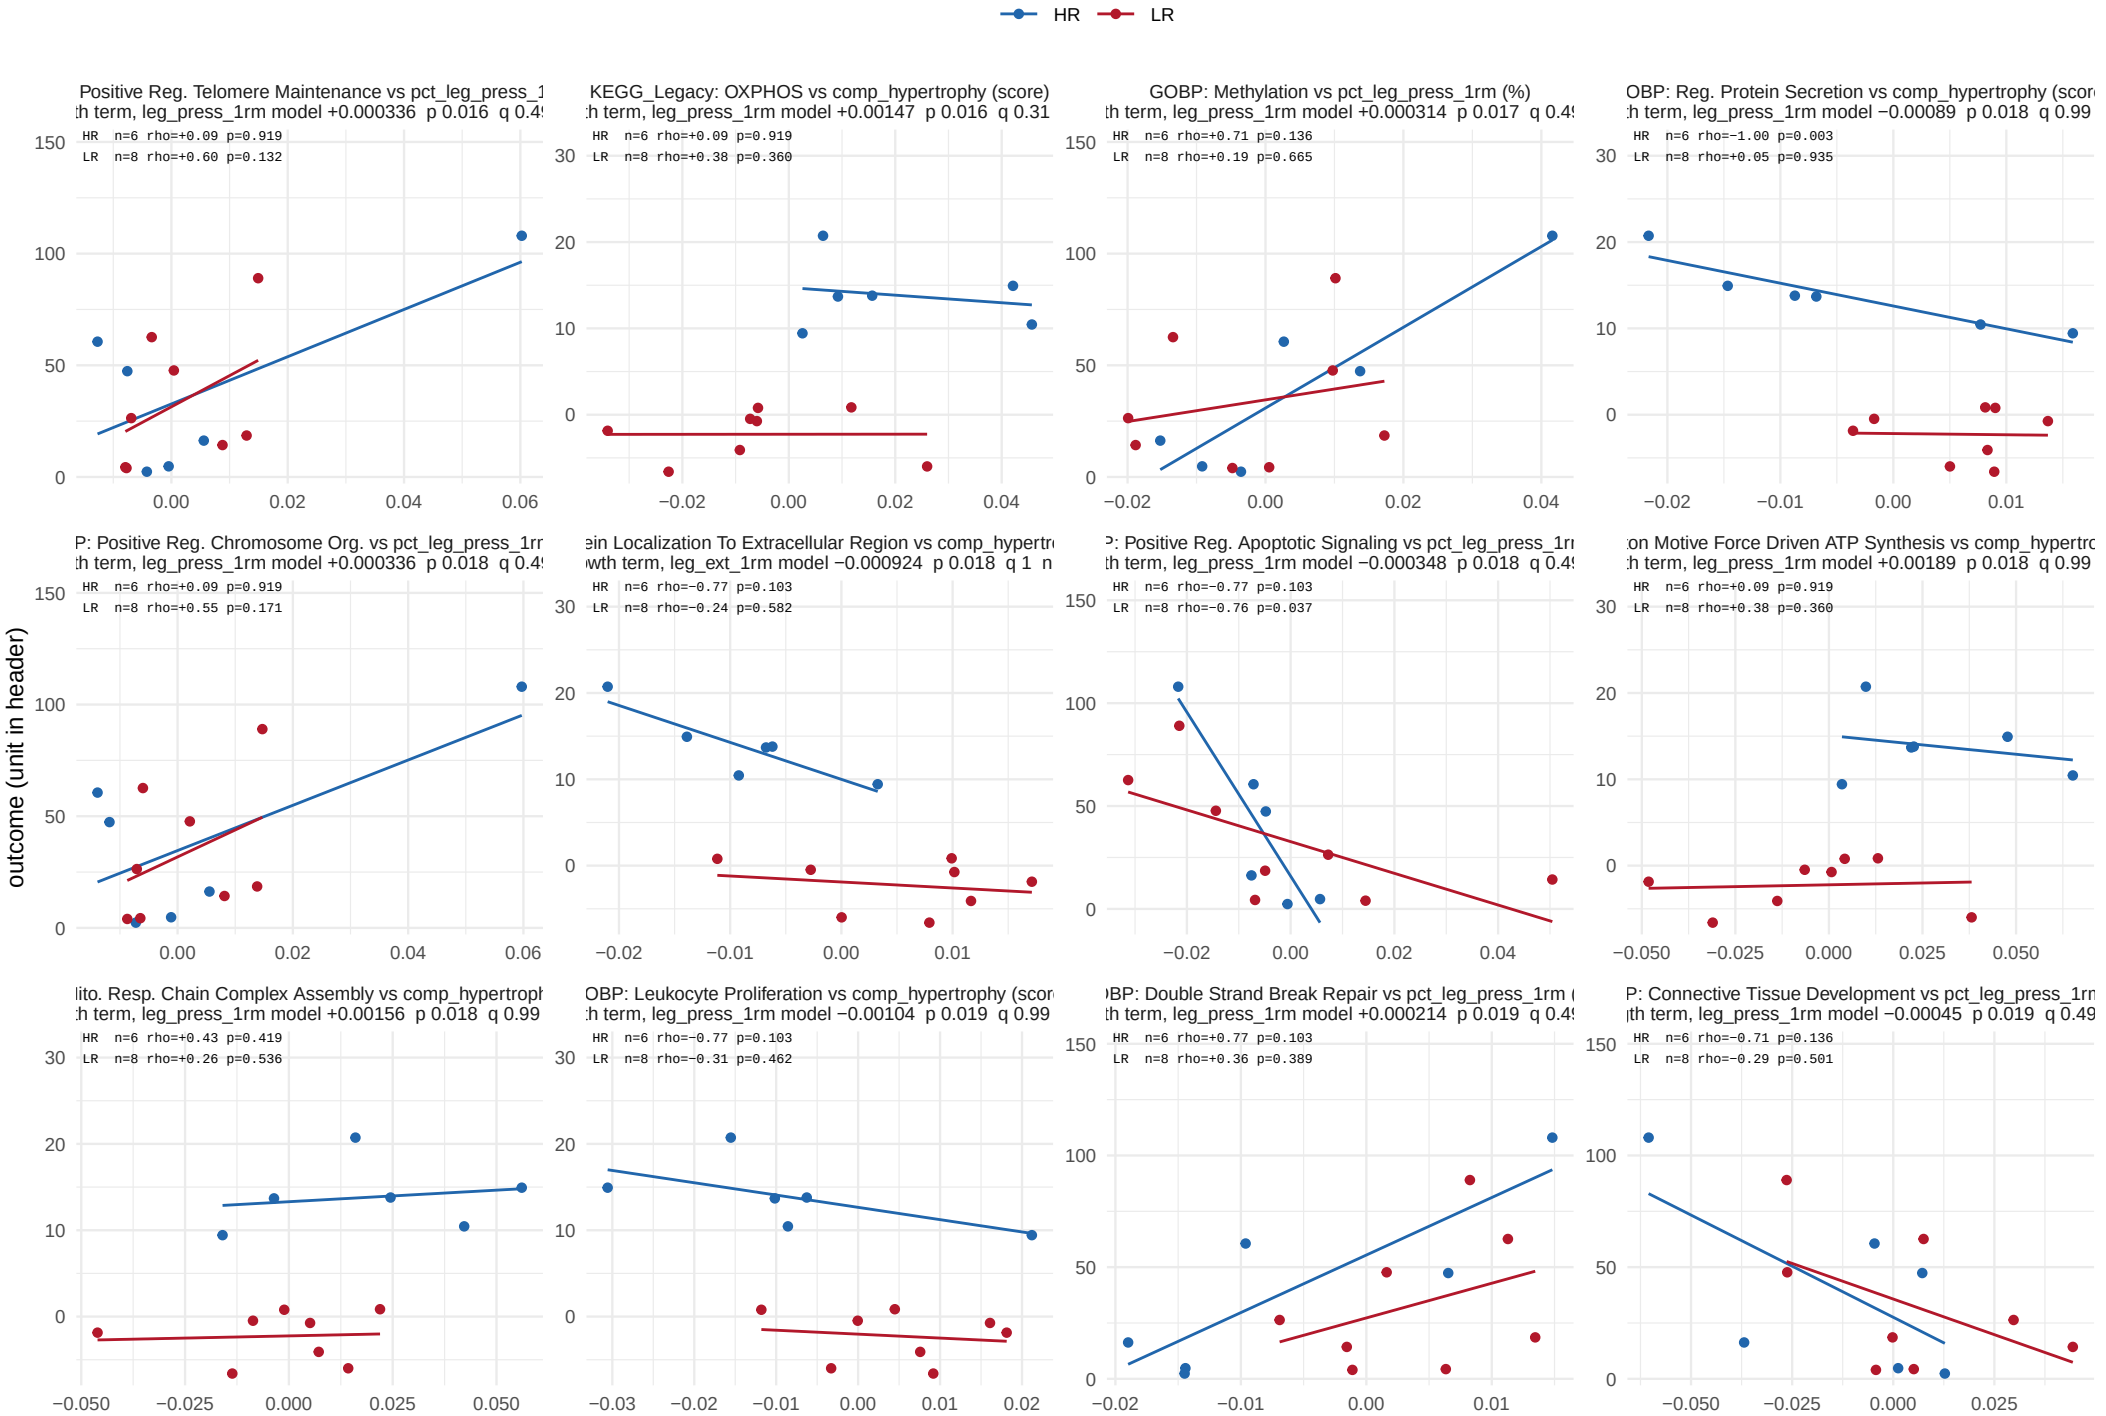


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

## Two predictor, training window


217 of 5512 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 6 of 19.

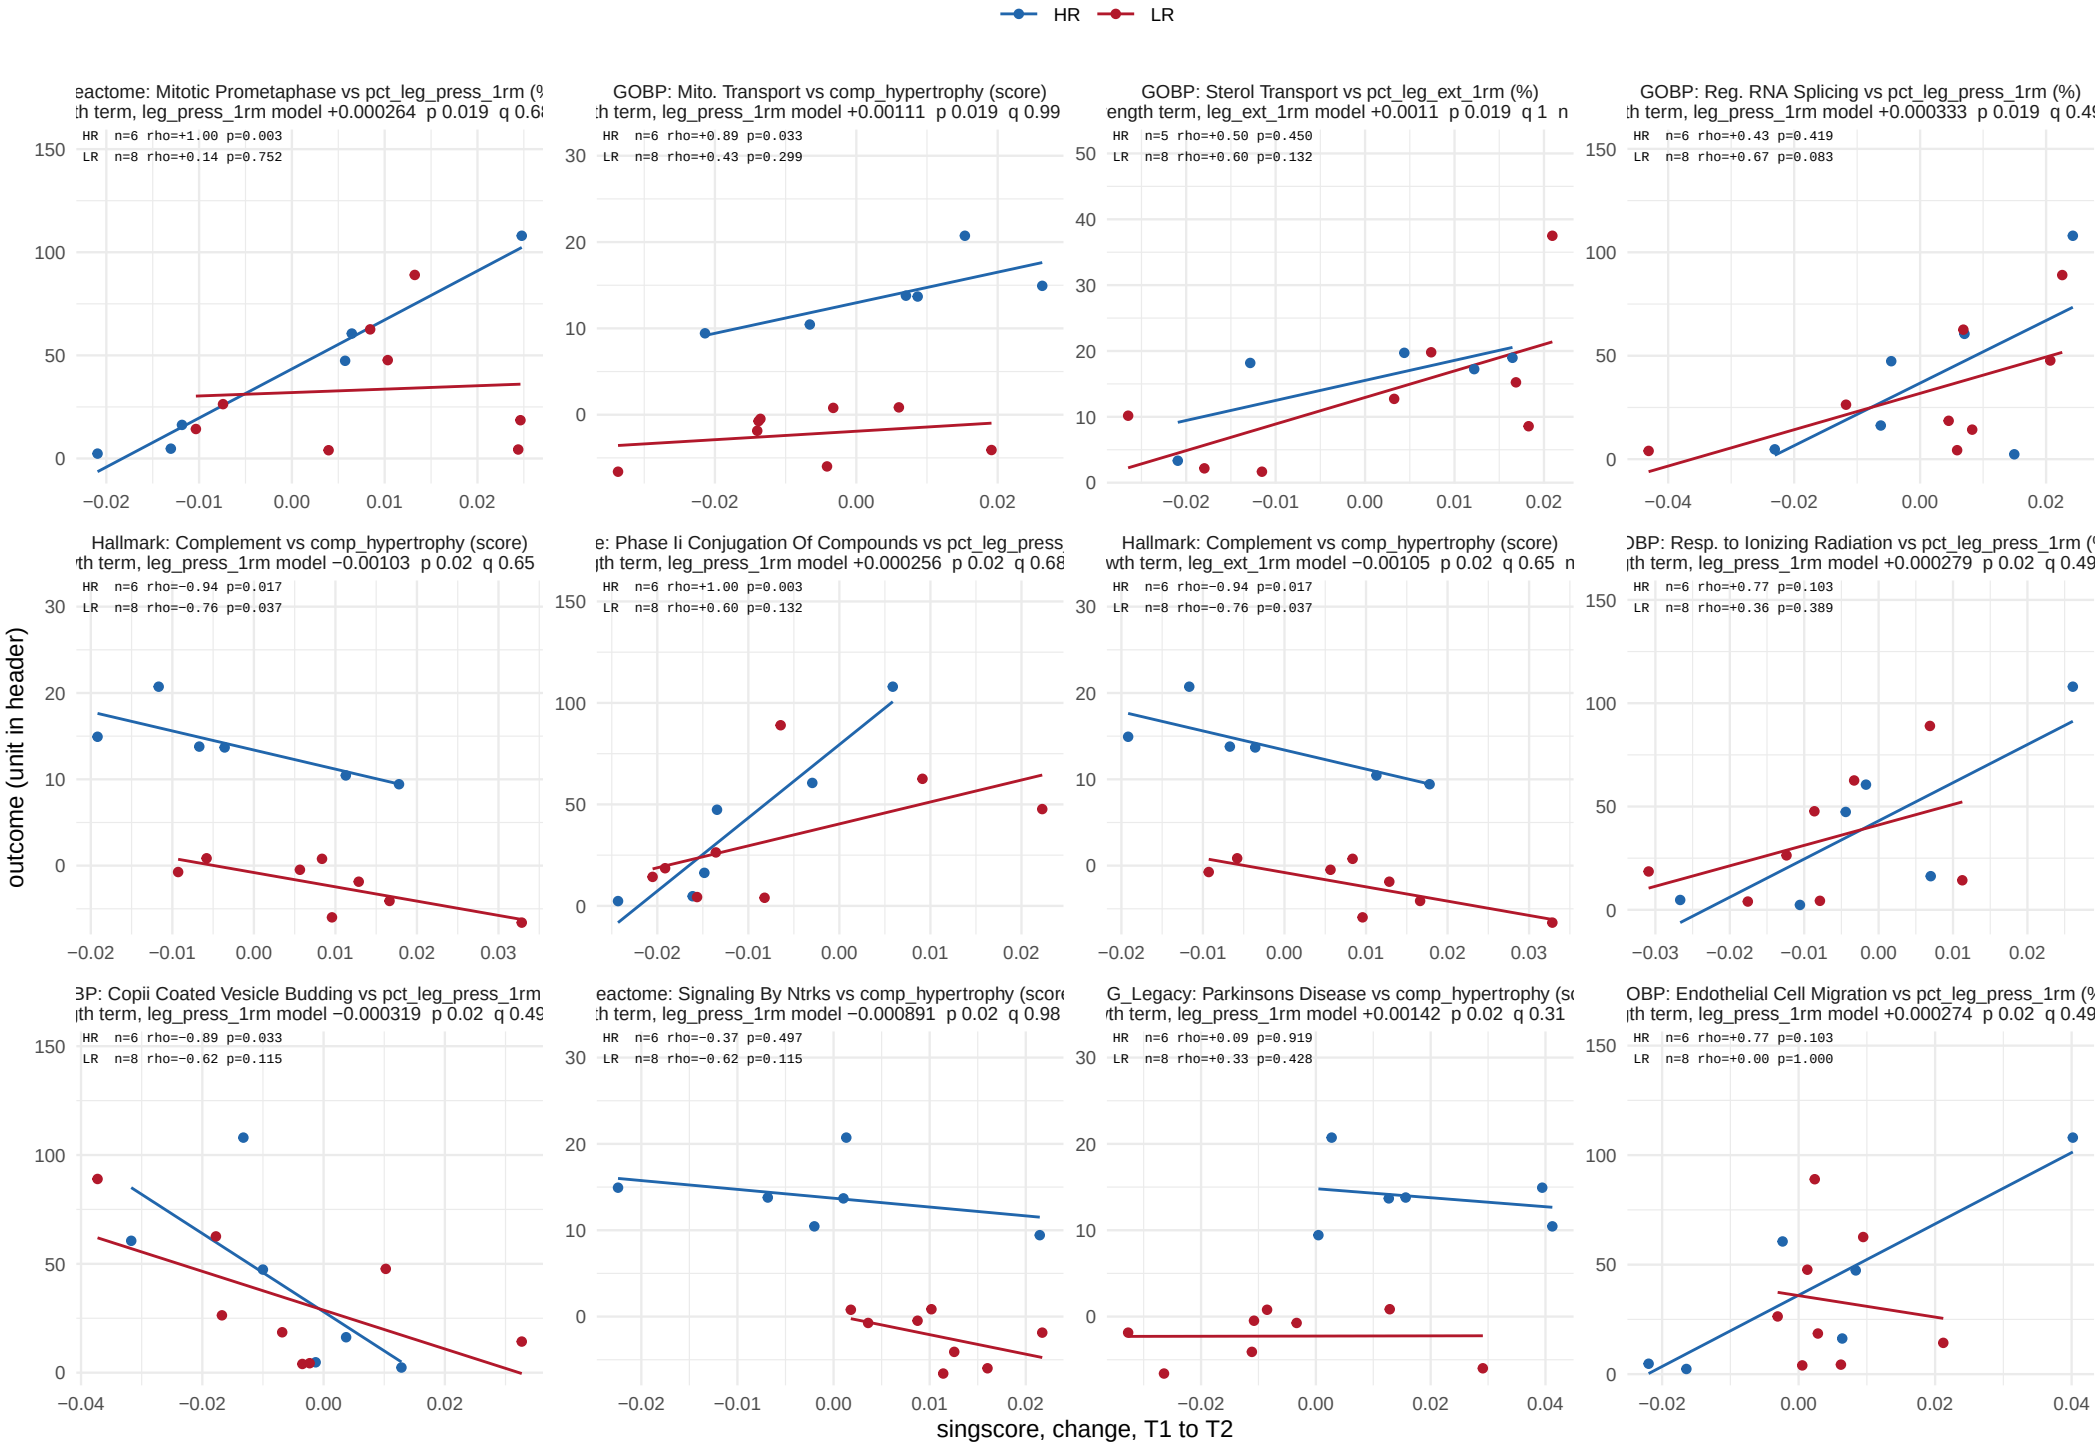


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

## Two predictor, training window


217 of 5512 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 7 of 19.

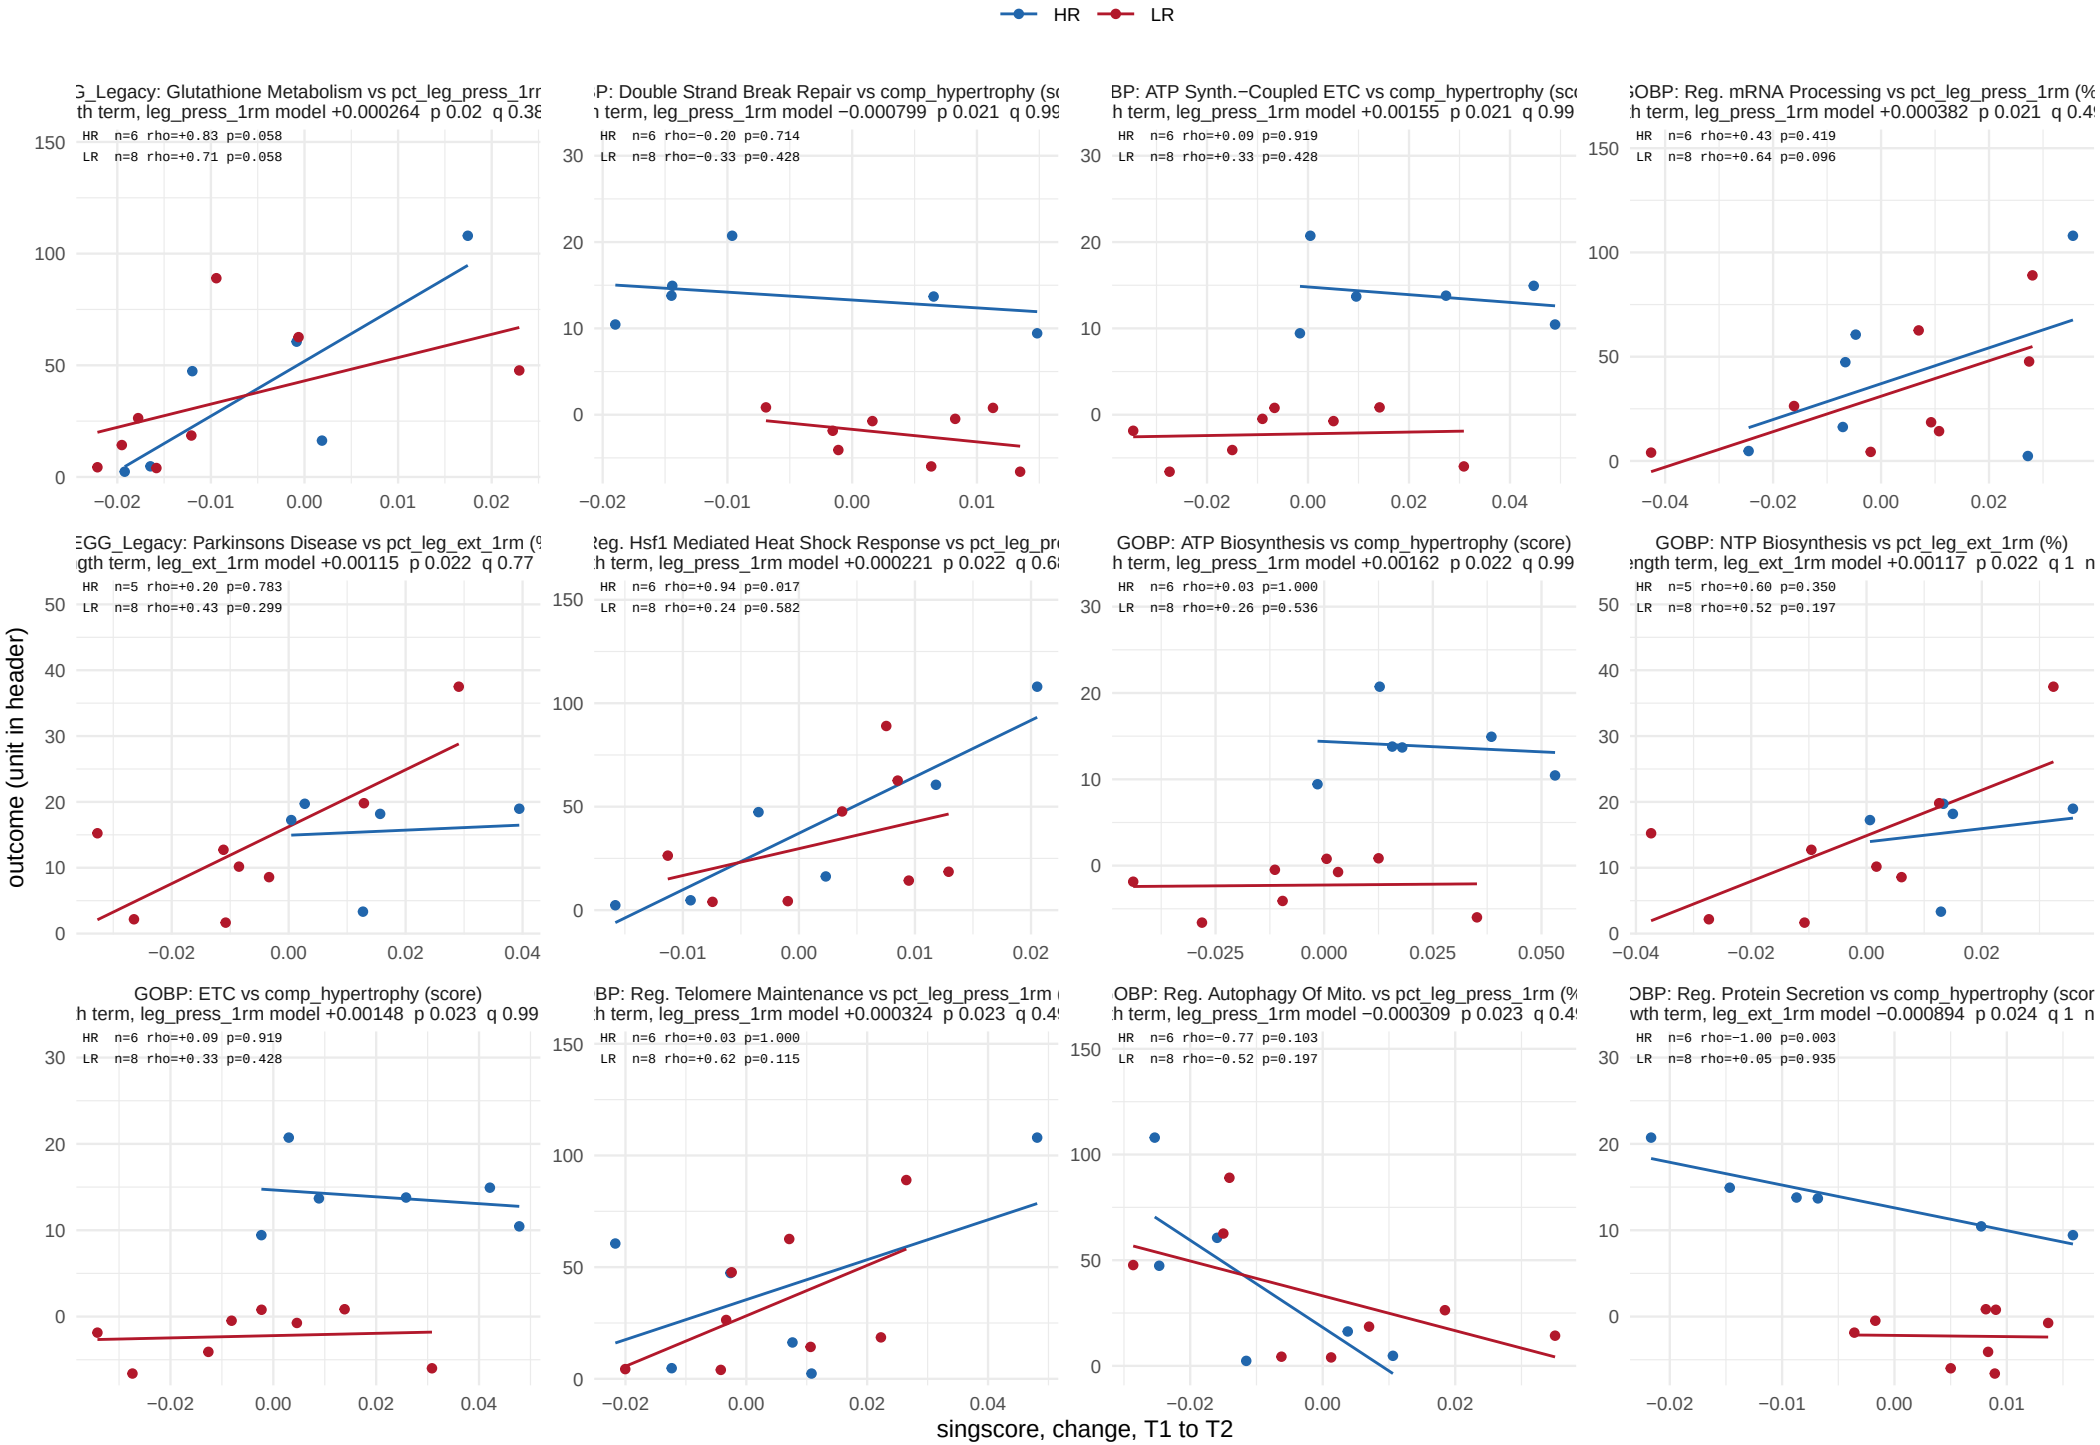


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

## Two predictor, training window


217 of 5512 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 8 of 19.

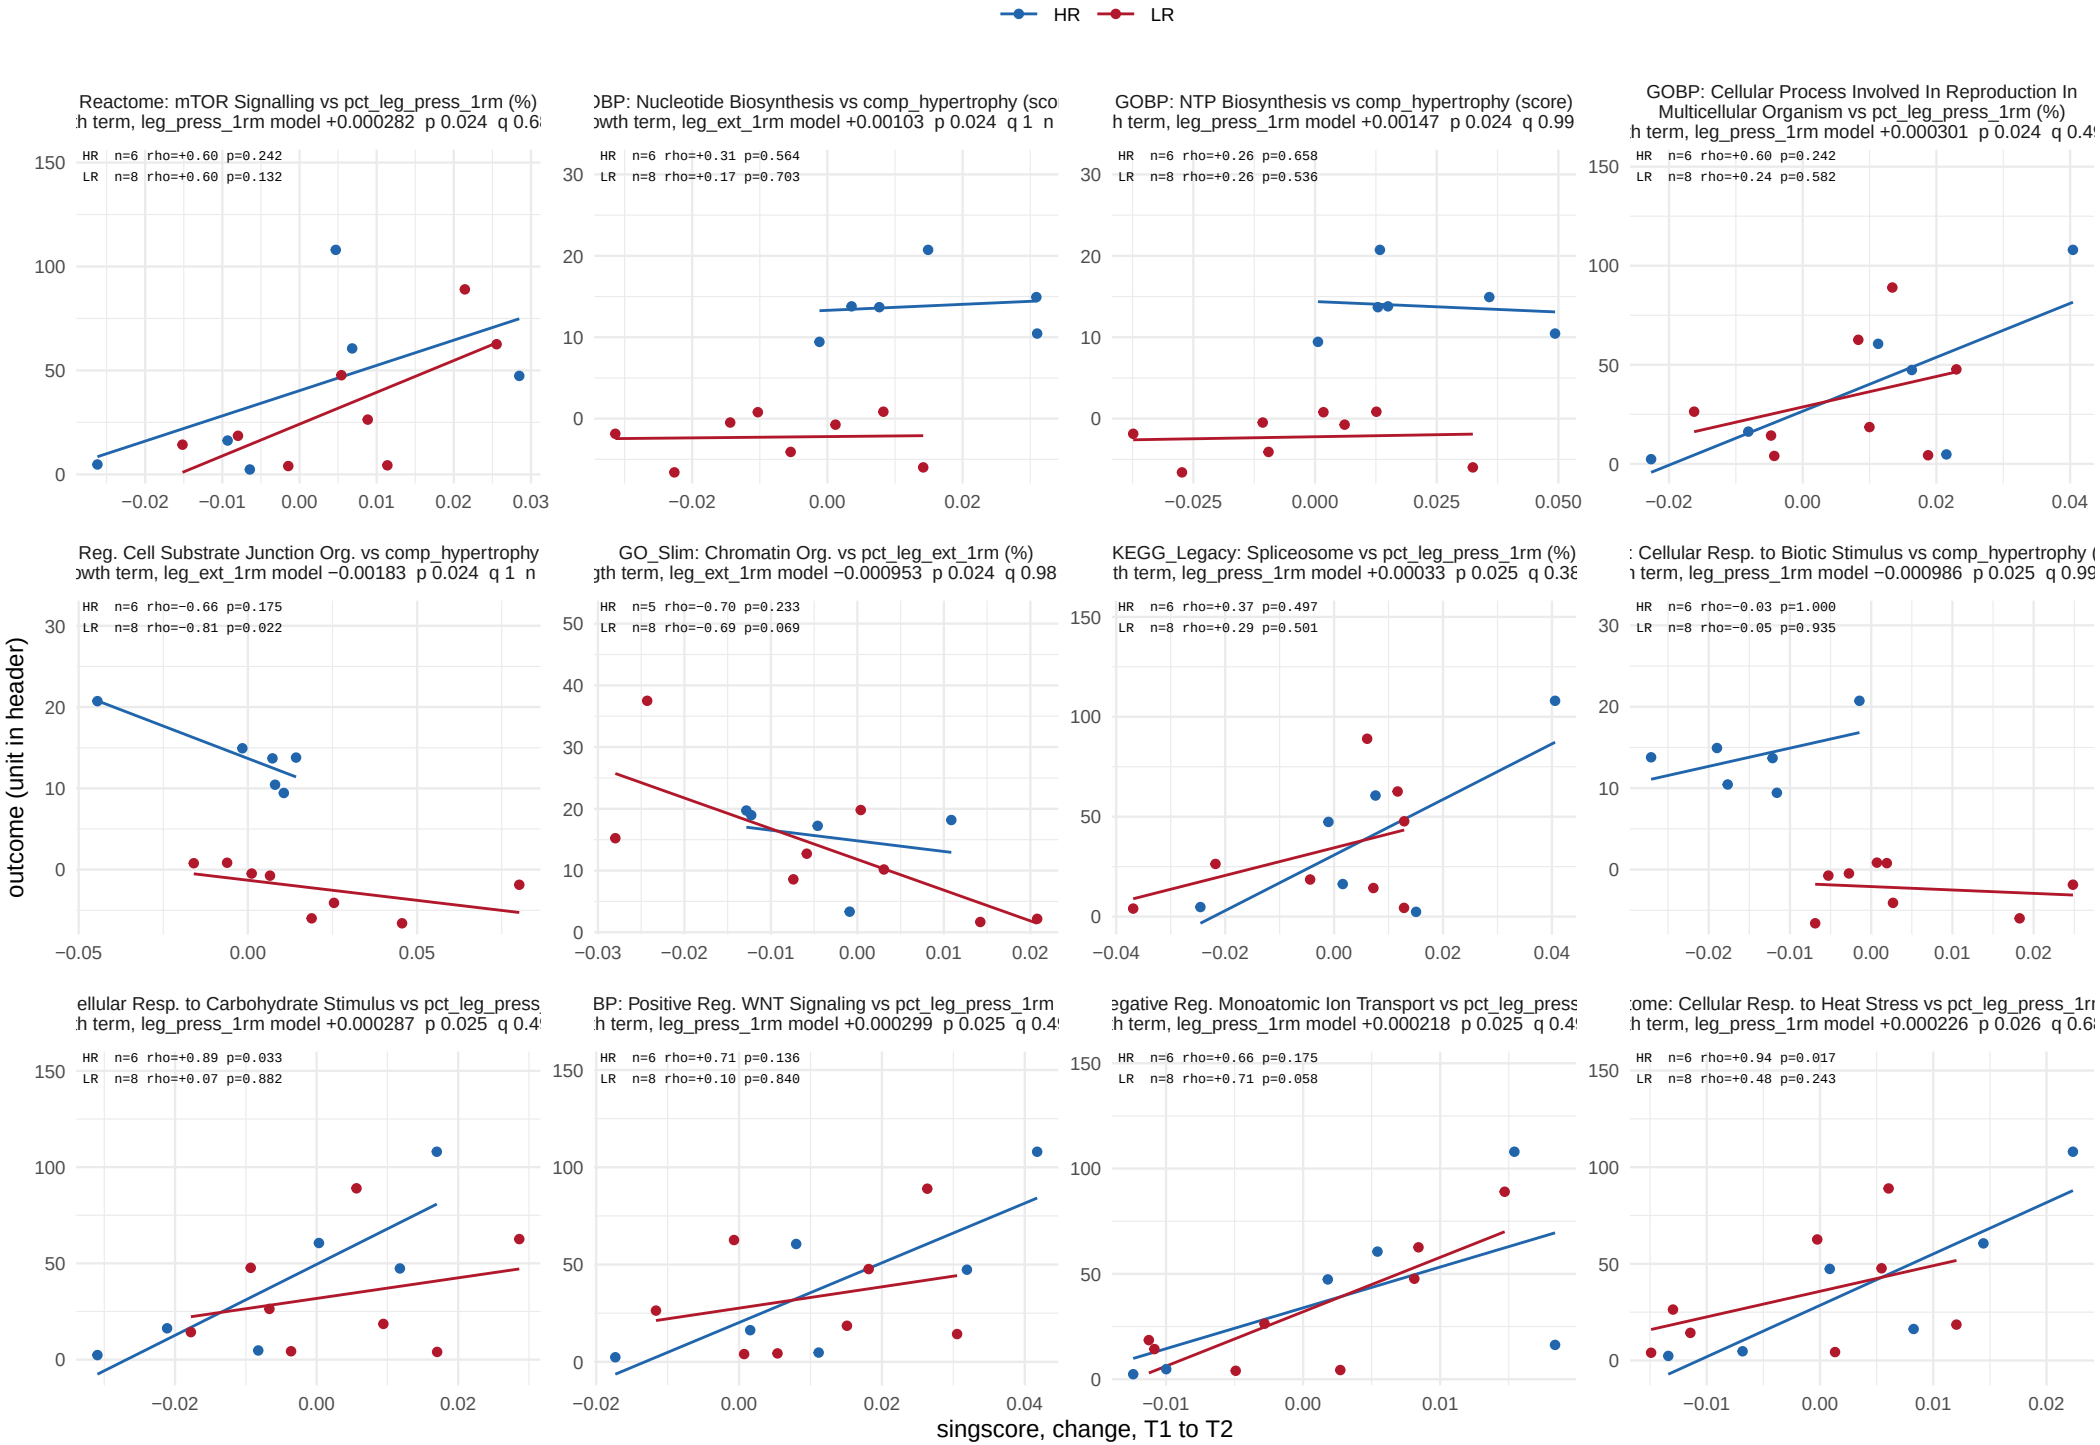


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

## Two predictor, training window


217 of 5512 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 9 of 19.

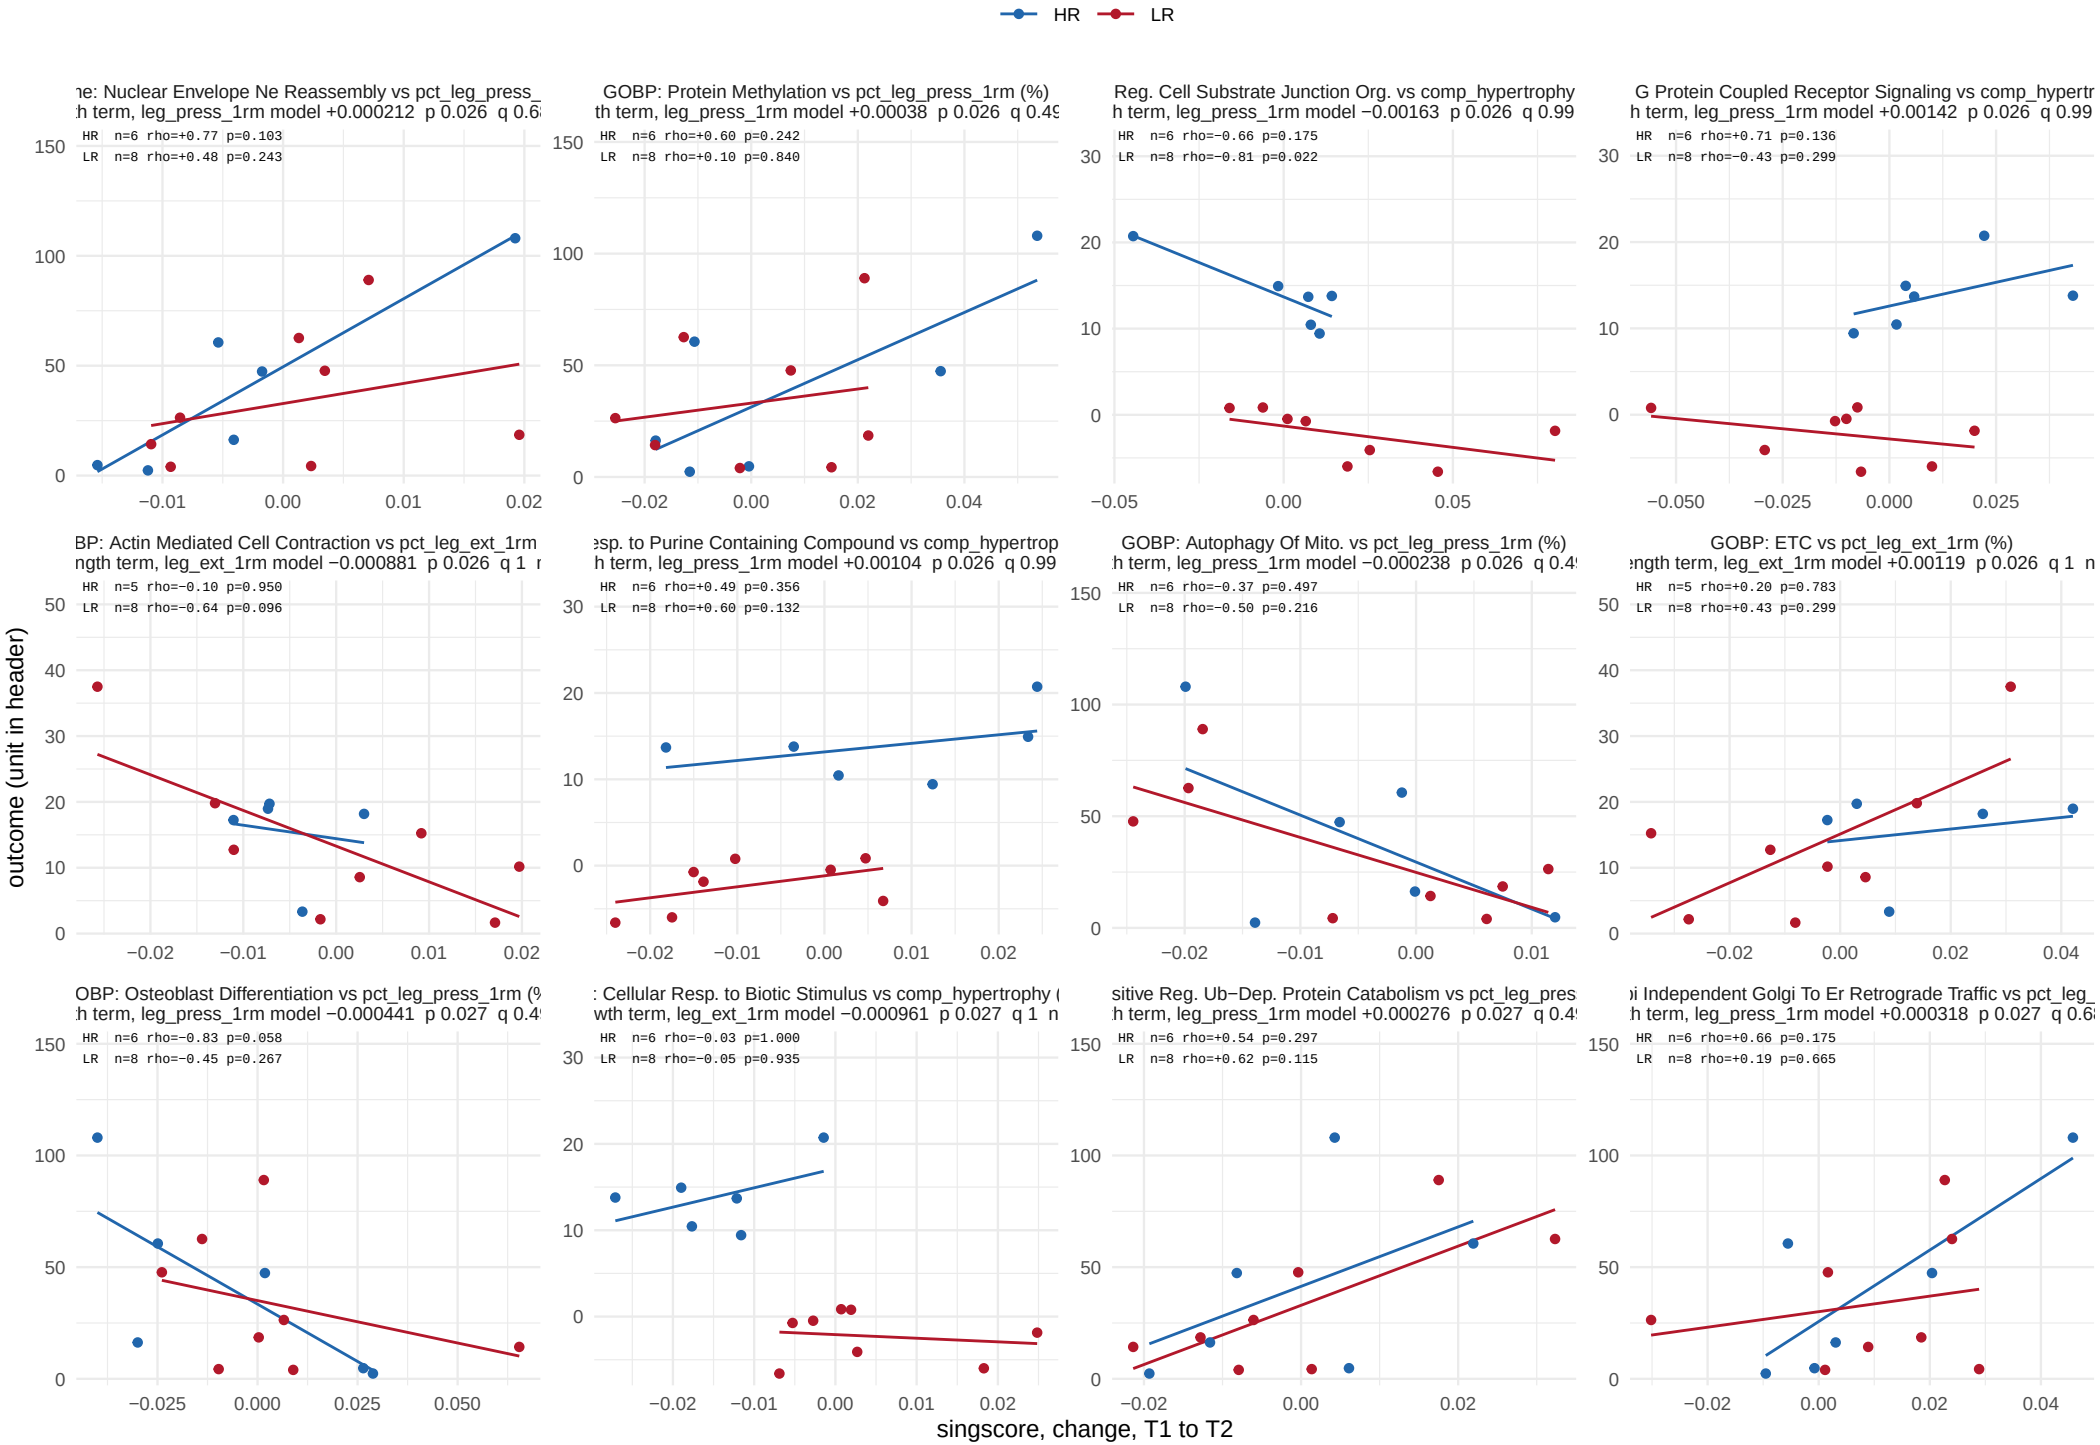


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

## Two predictor, training window


217 of 5512 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 10 of 19.

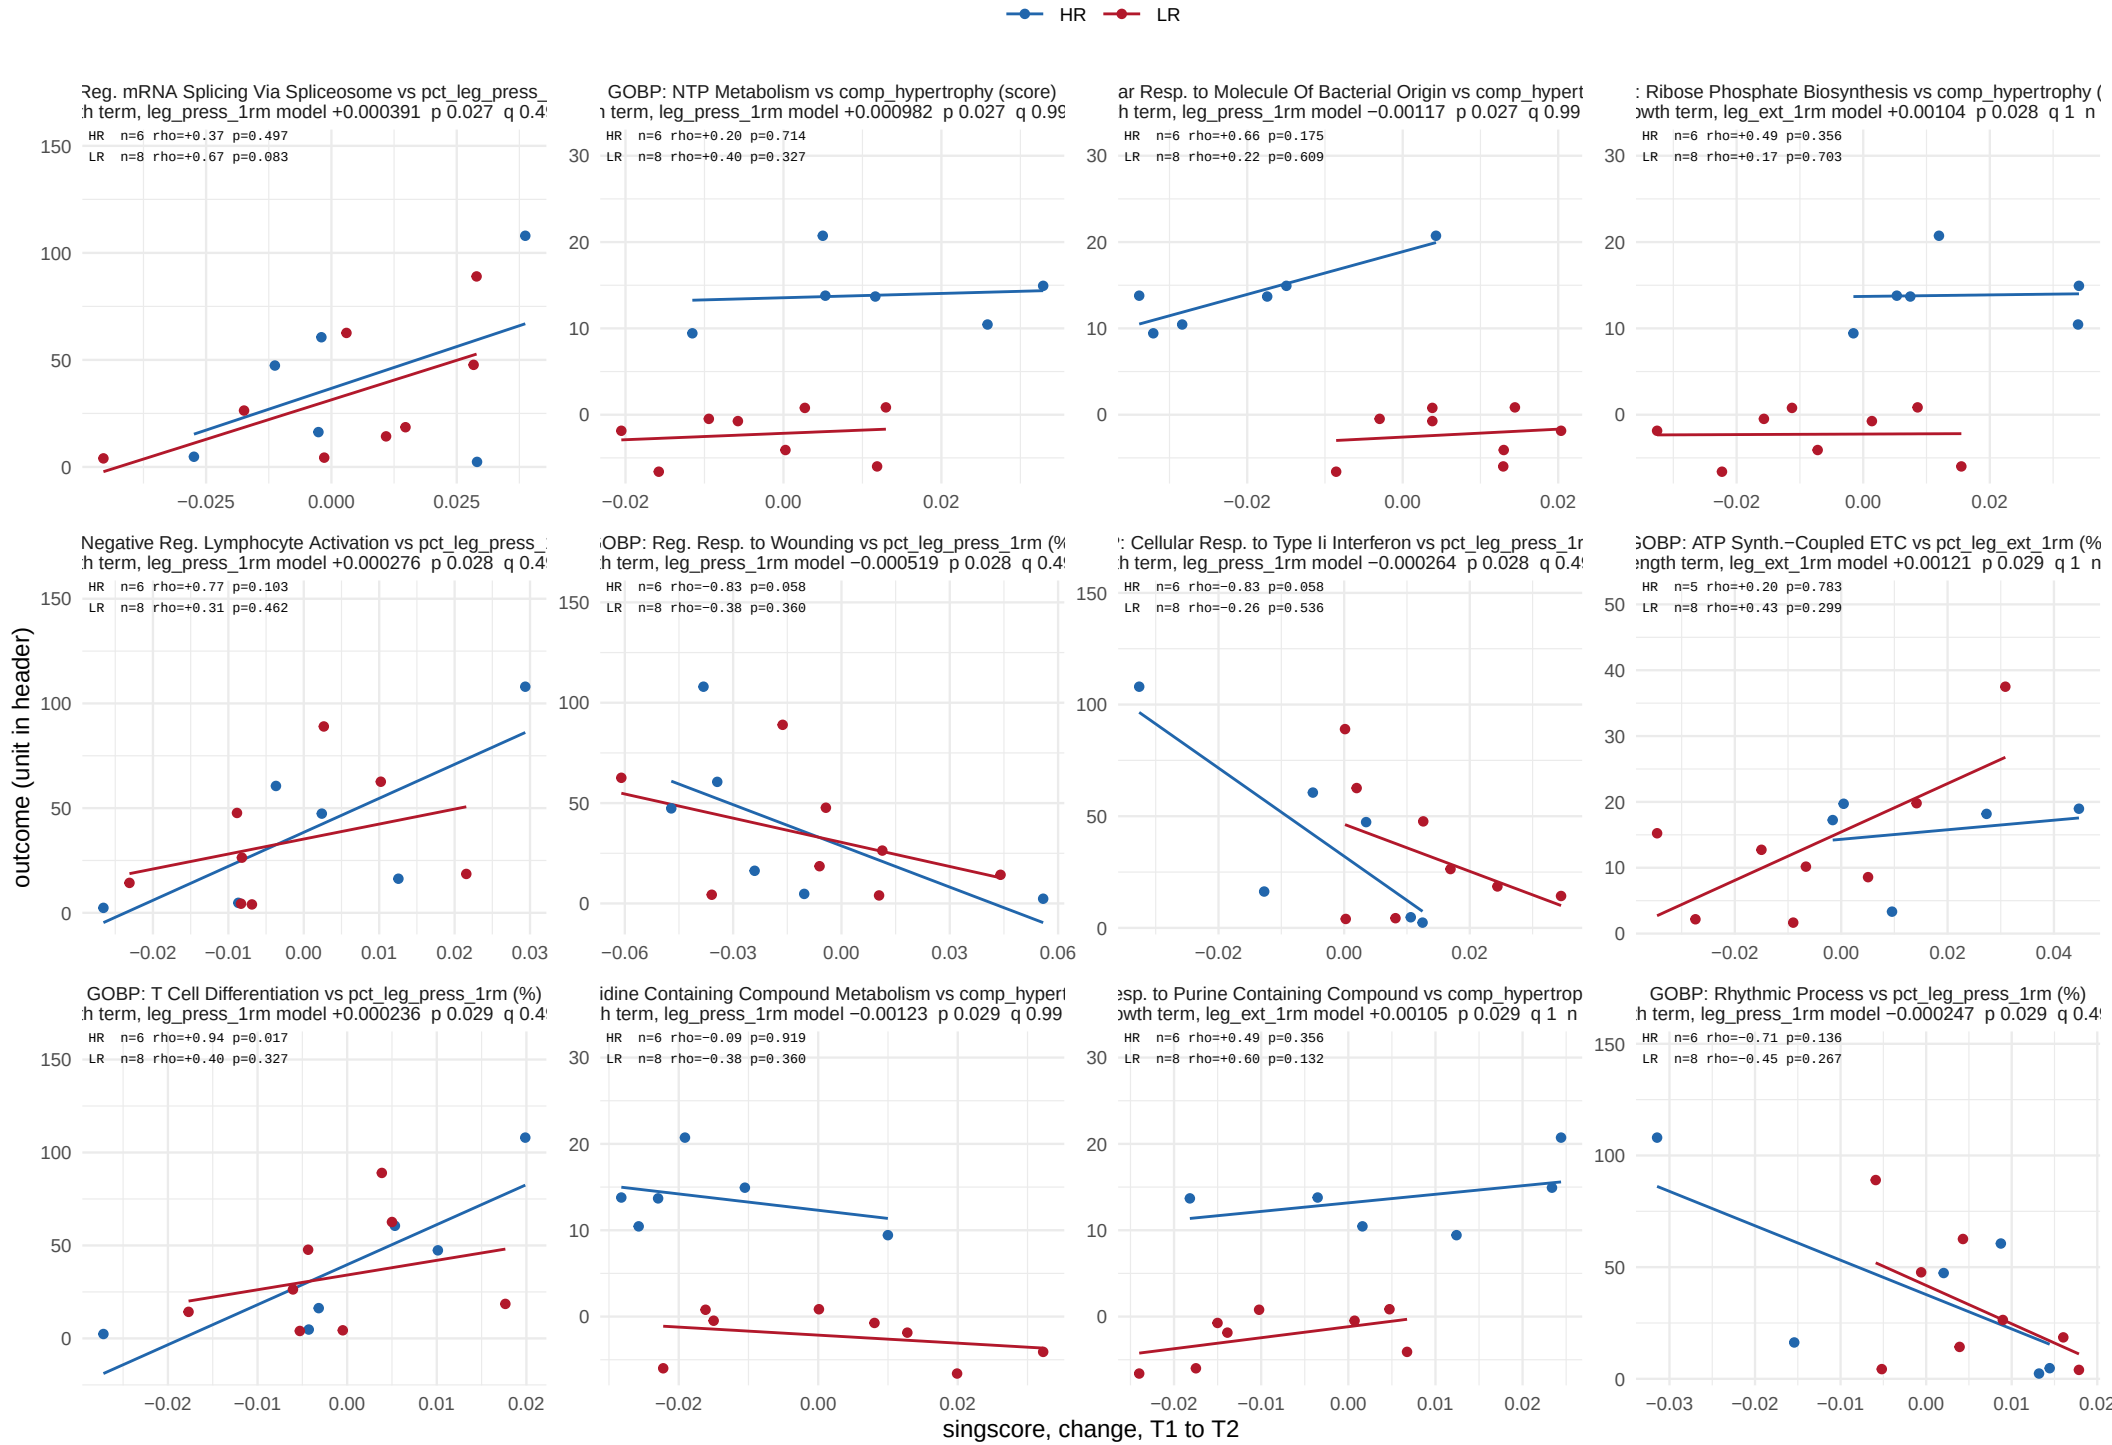


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

## Two predictor, training window


217 of 5512 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 11 of 19.

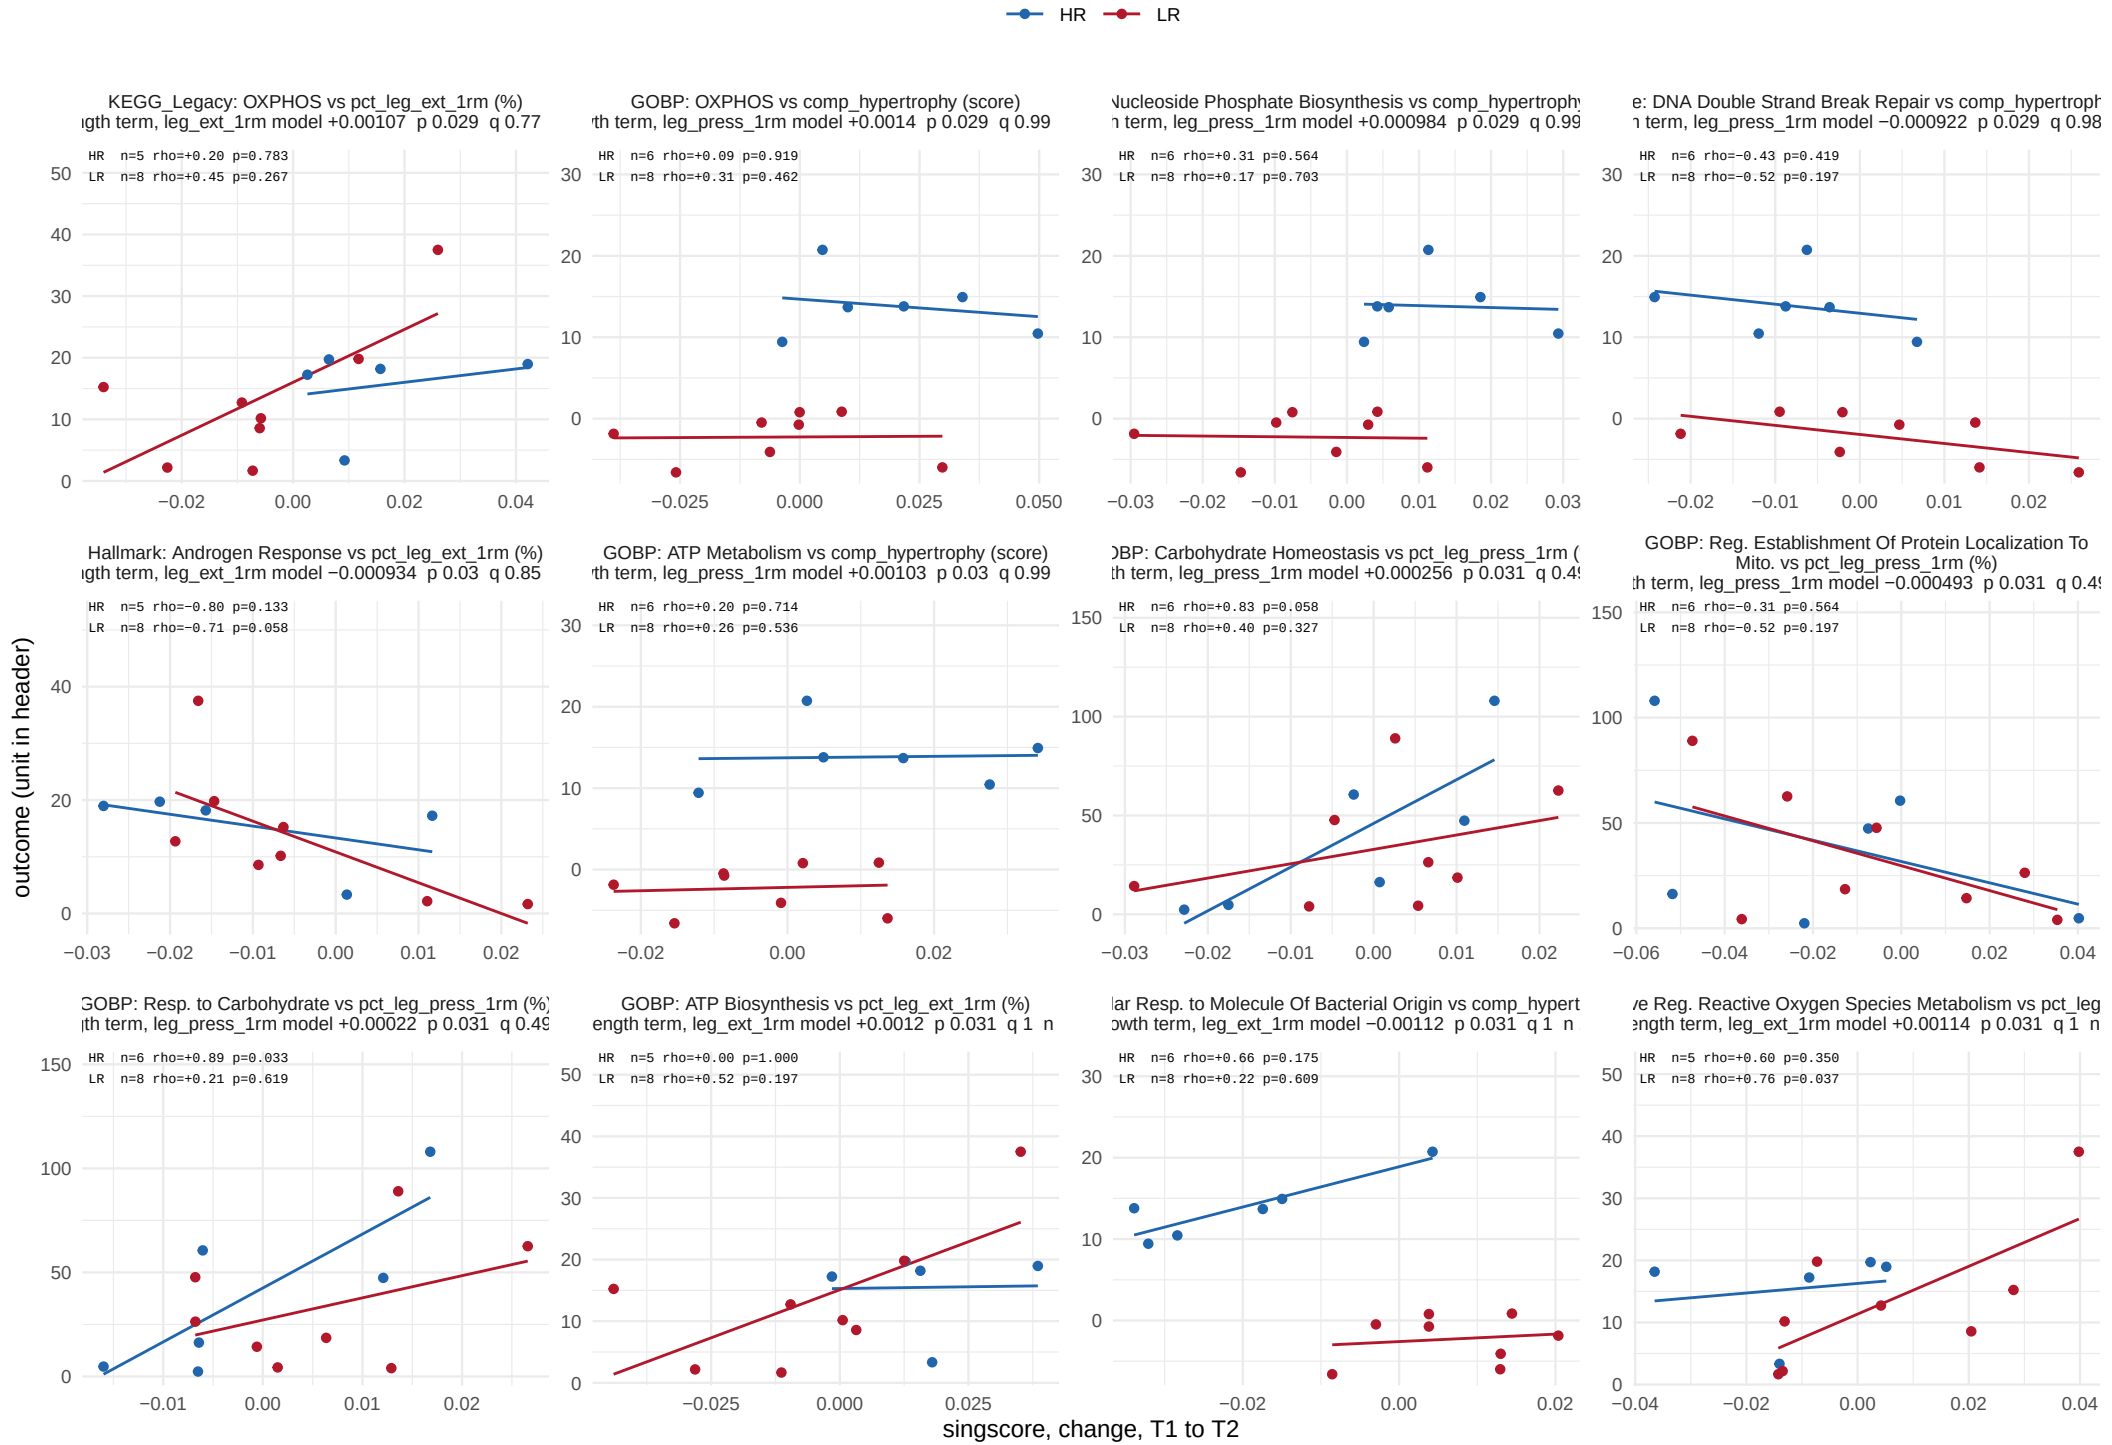


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

## Two predictor, training window


217 of 5512 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 12 of 19.

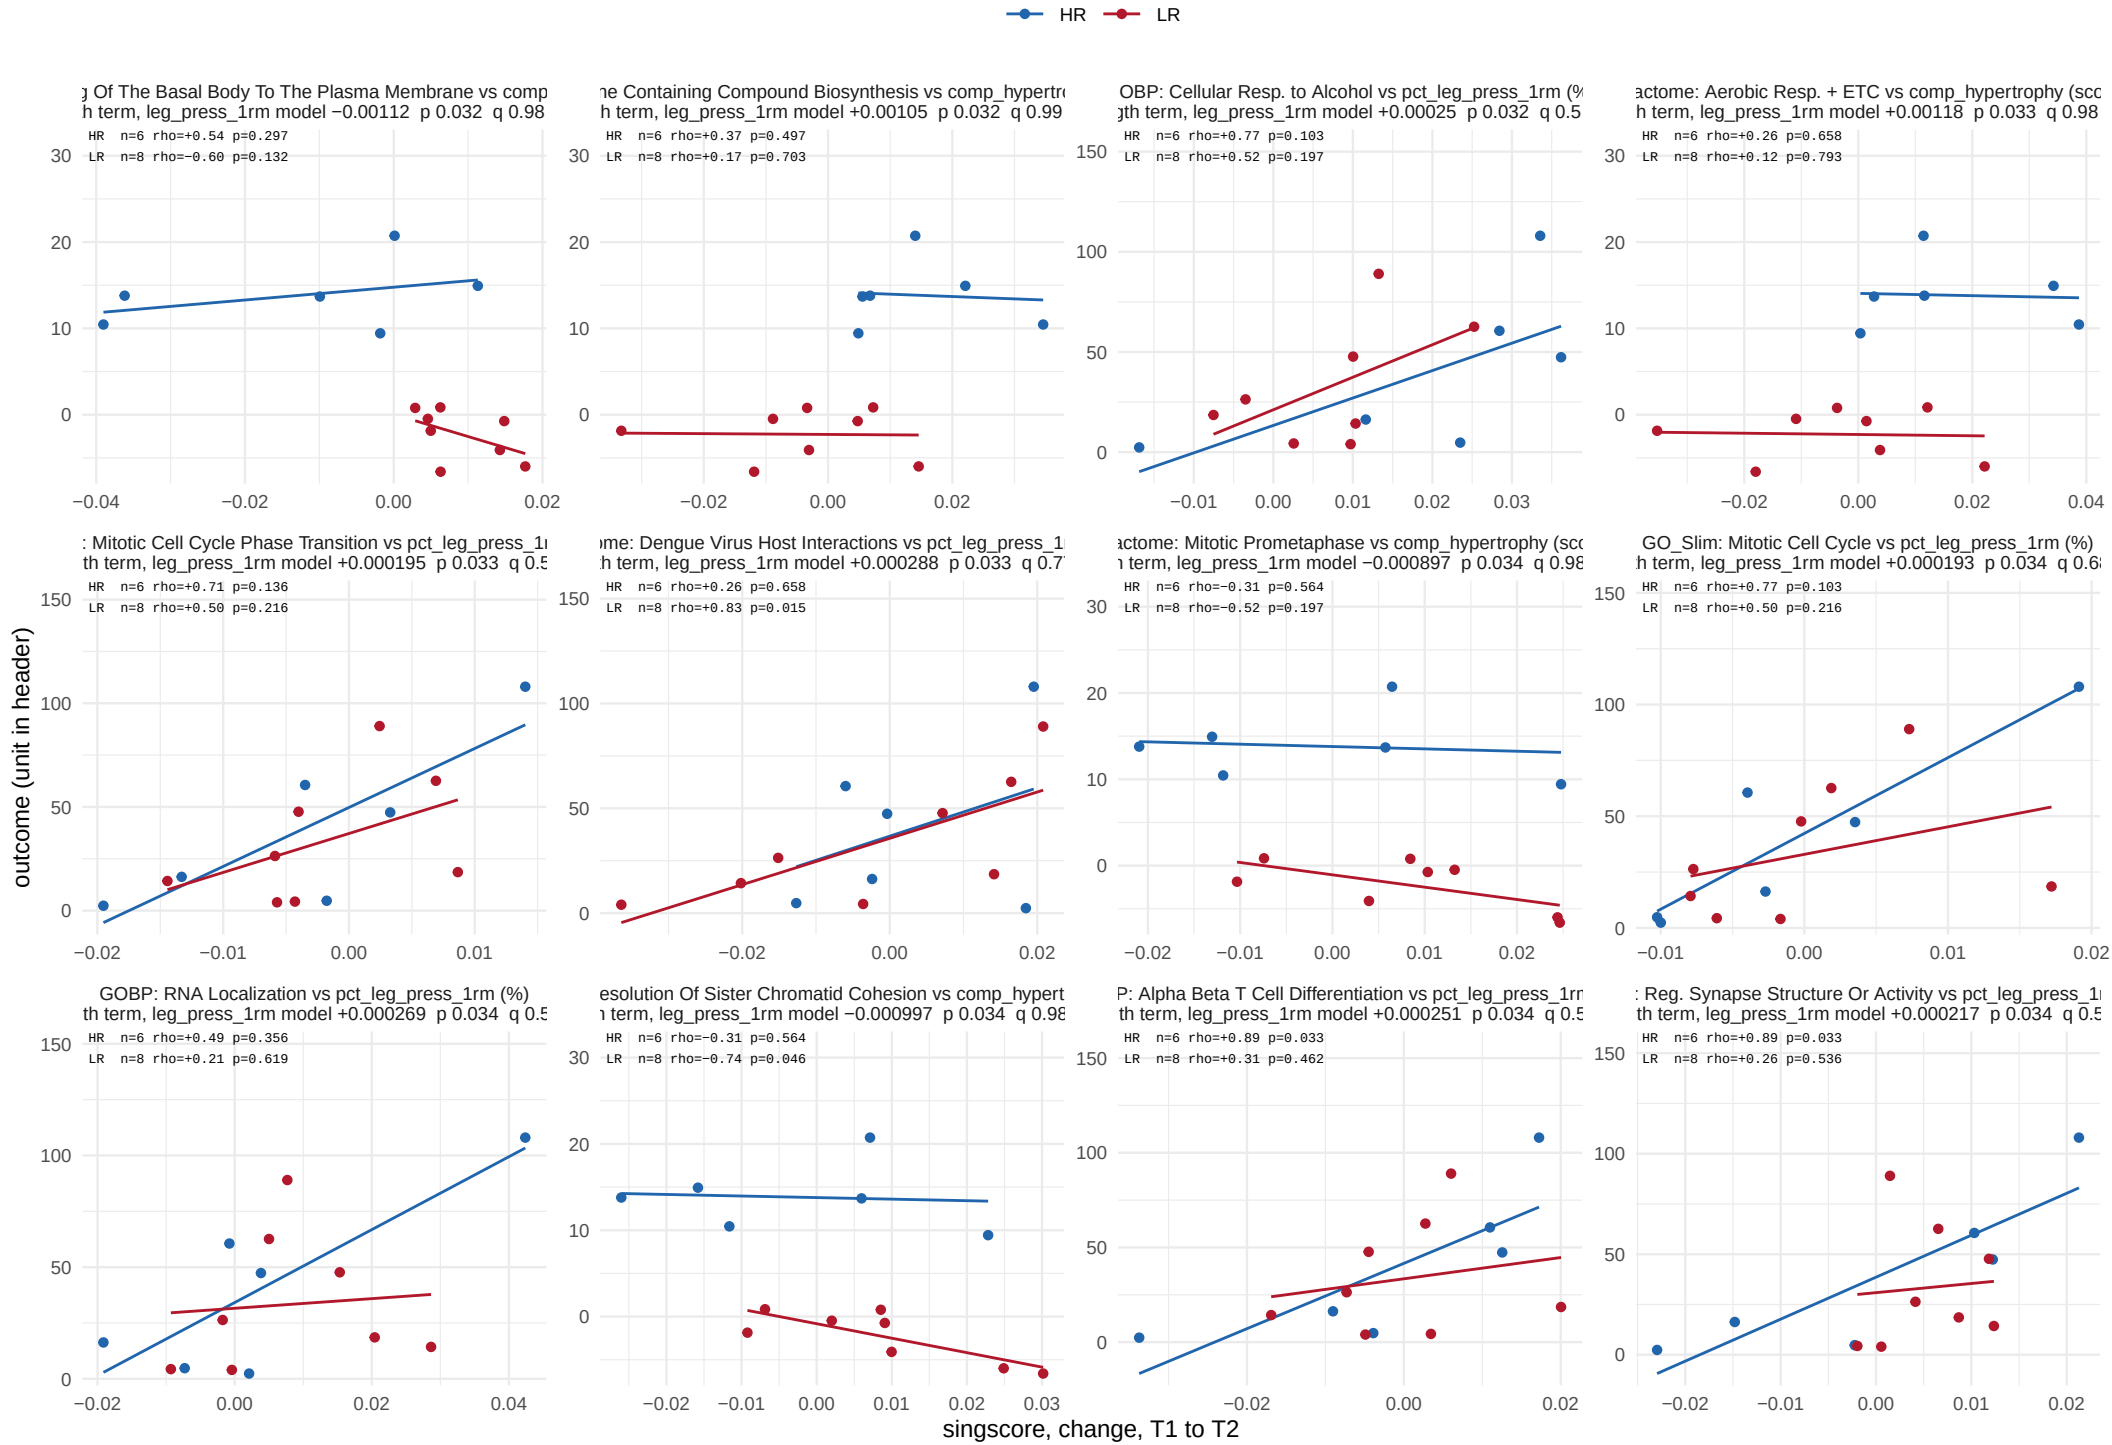


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

## Two predictor, training window


217 of 5512 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 13 of 19.

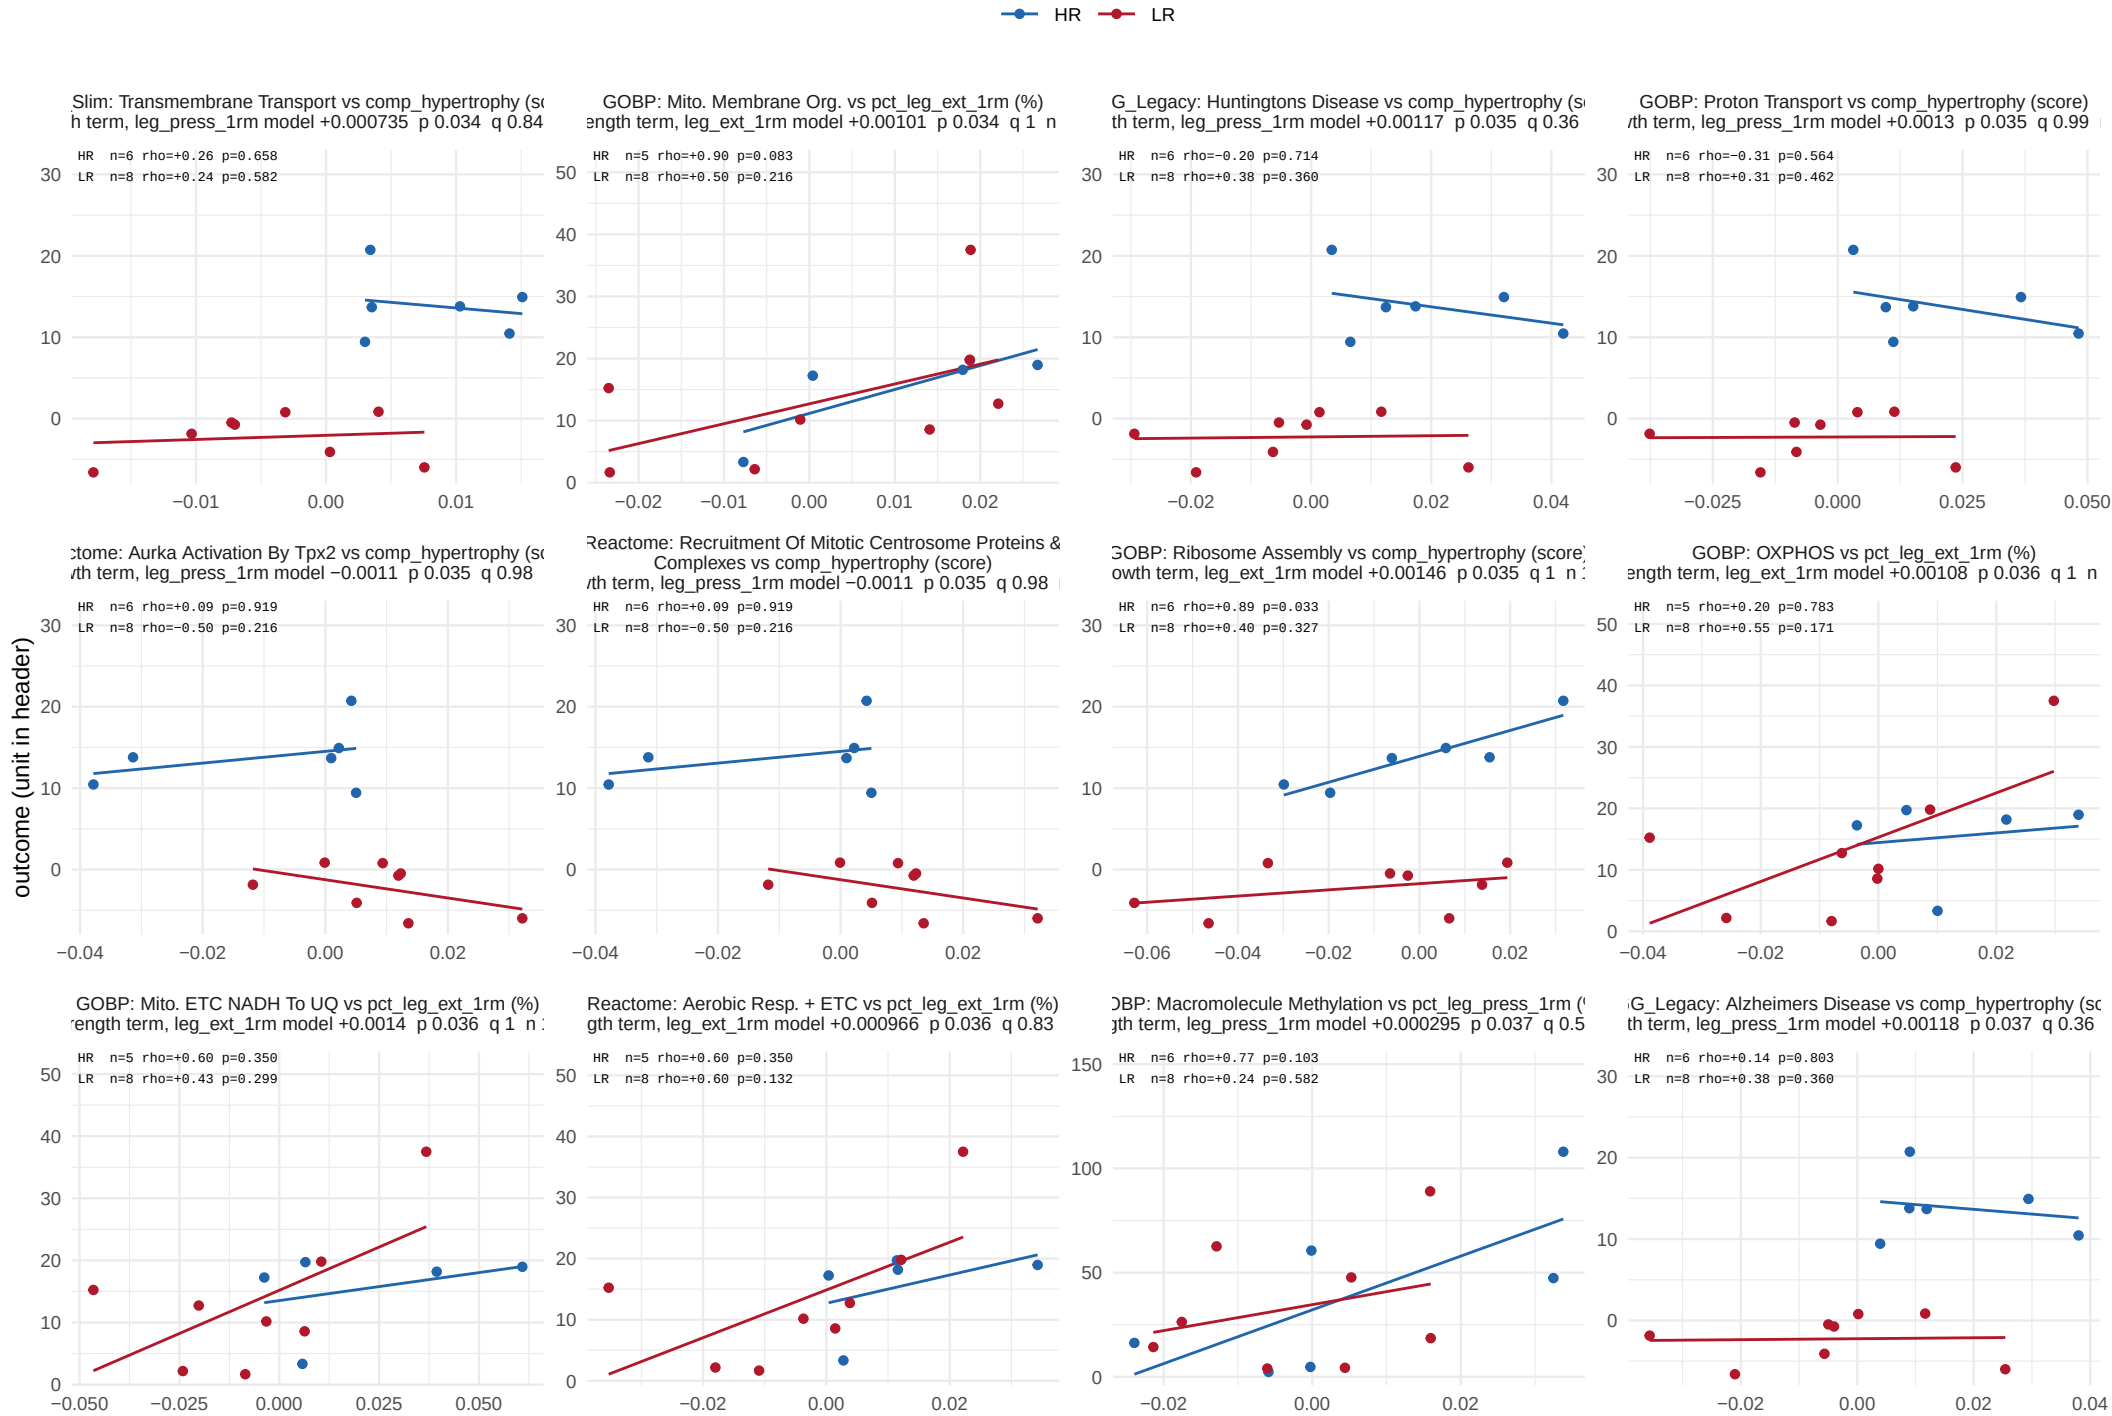


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

## Two predictor, training window


217 of 5512 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 14 of 19.

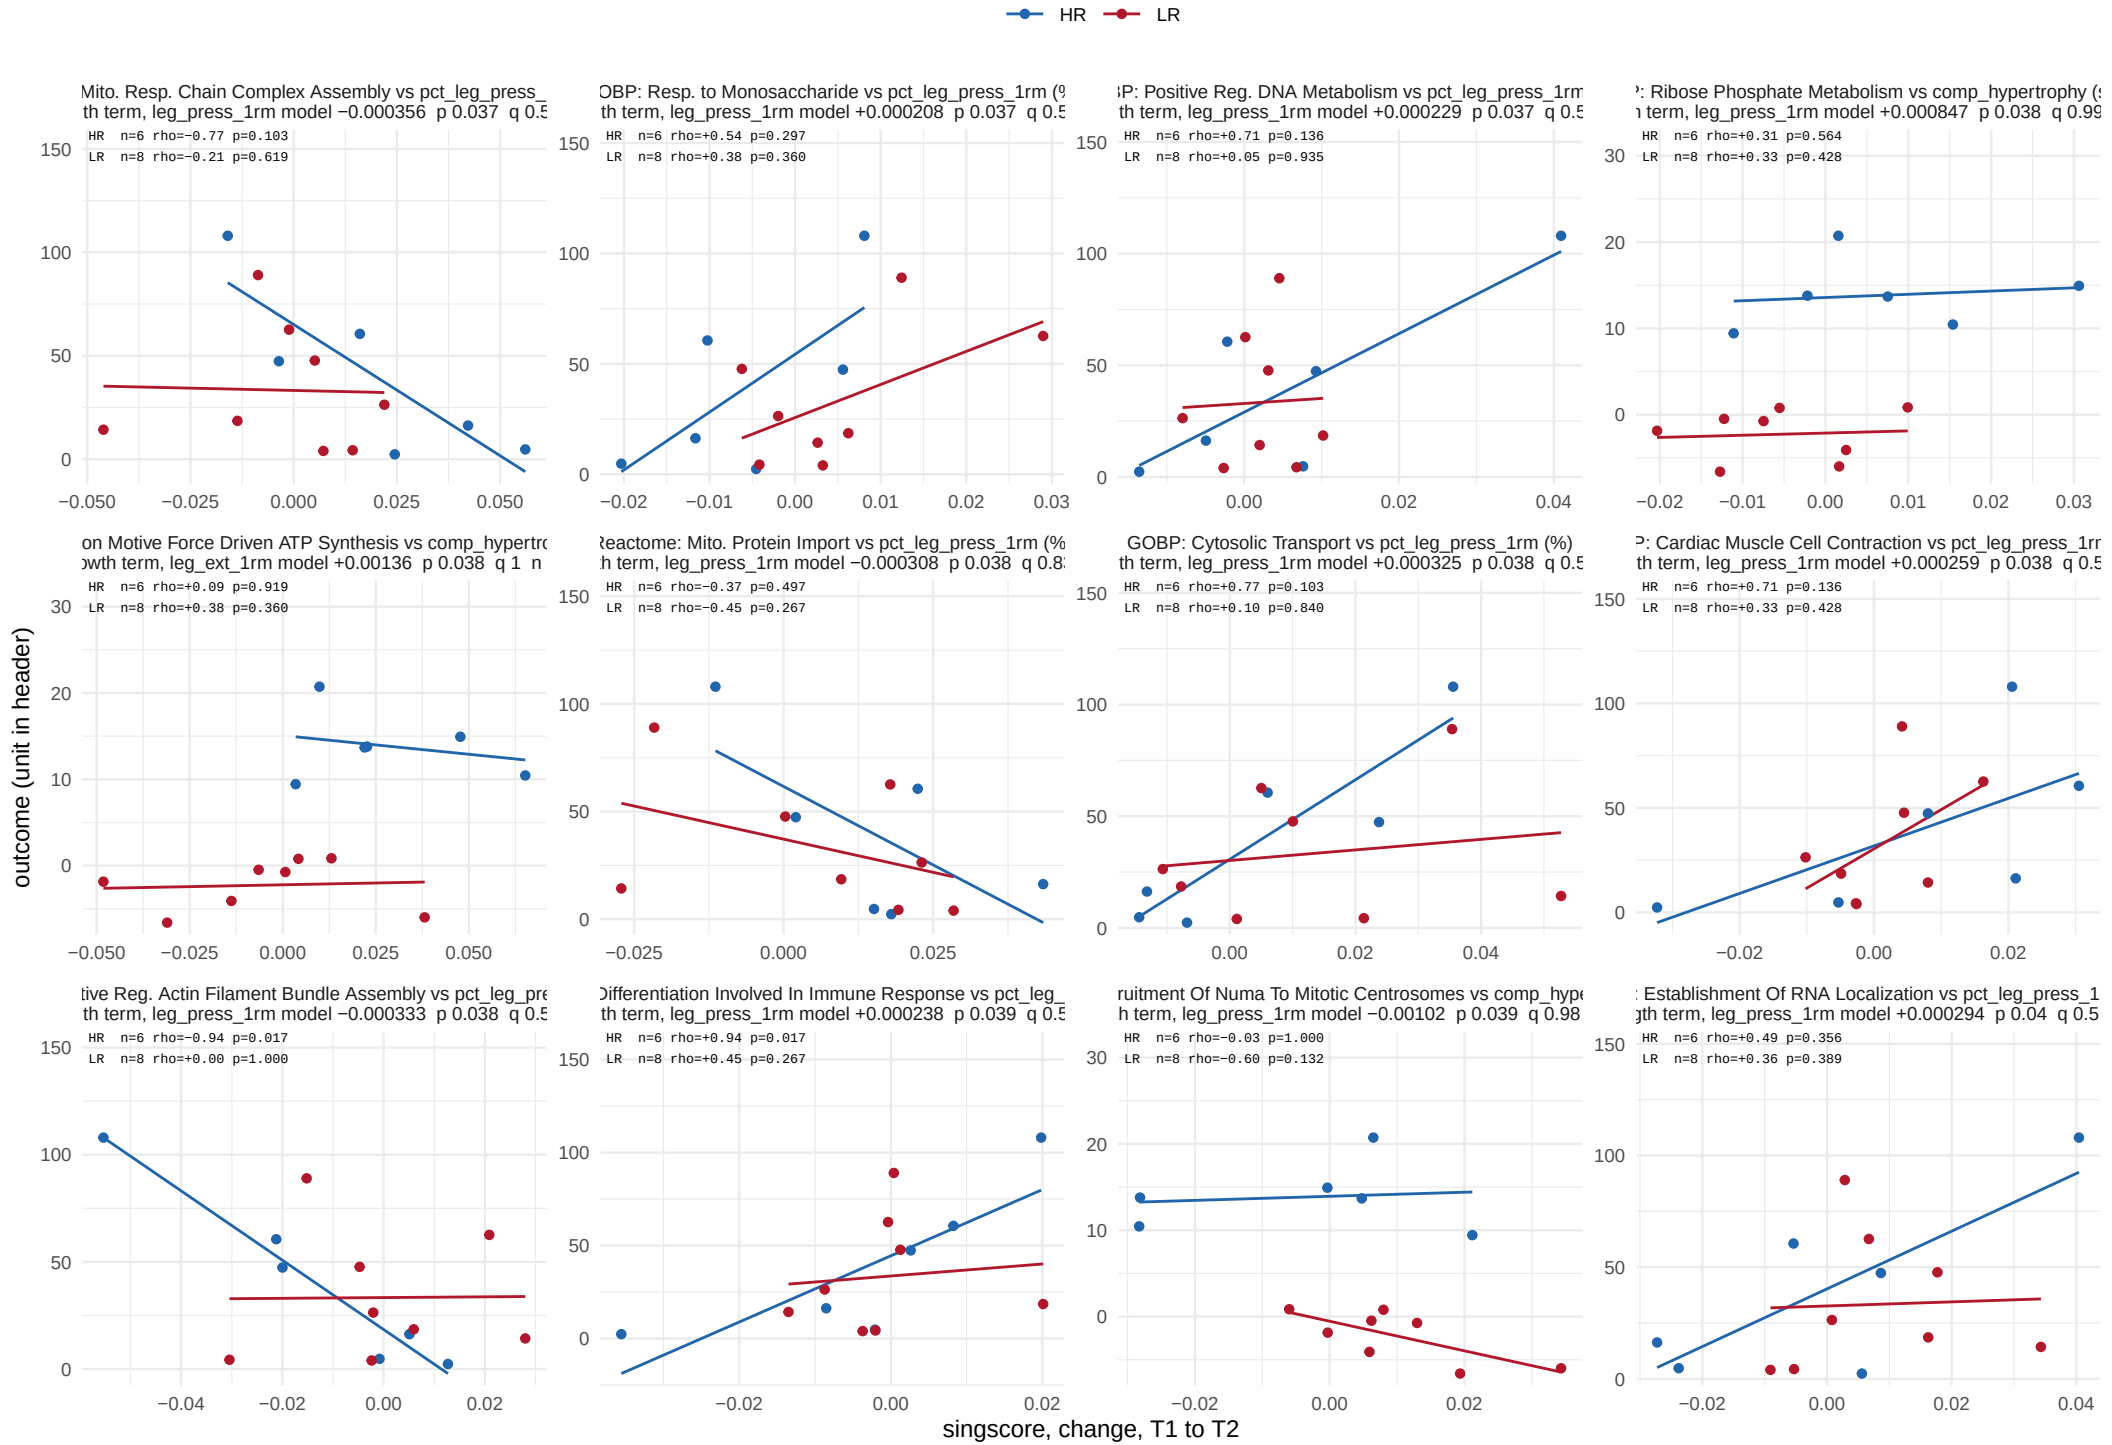


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

## Two predictor, training window

217 of 5512 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 15 of 19.

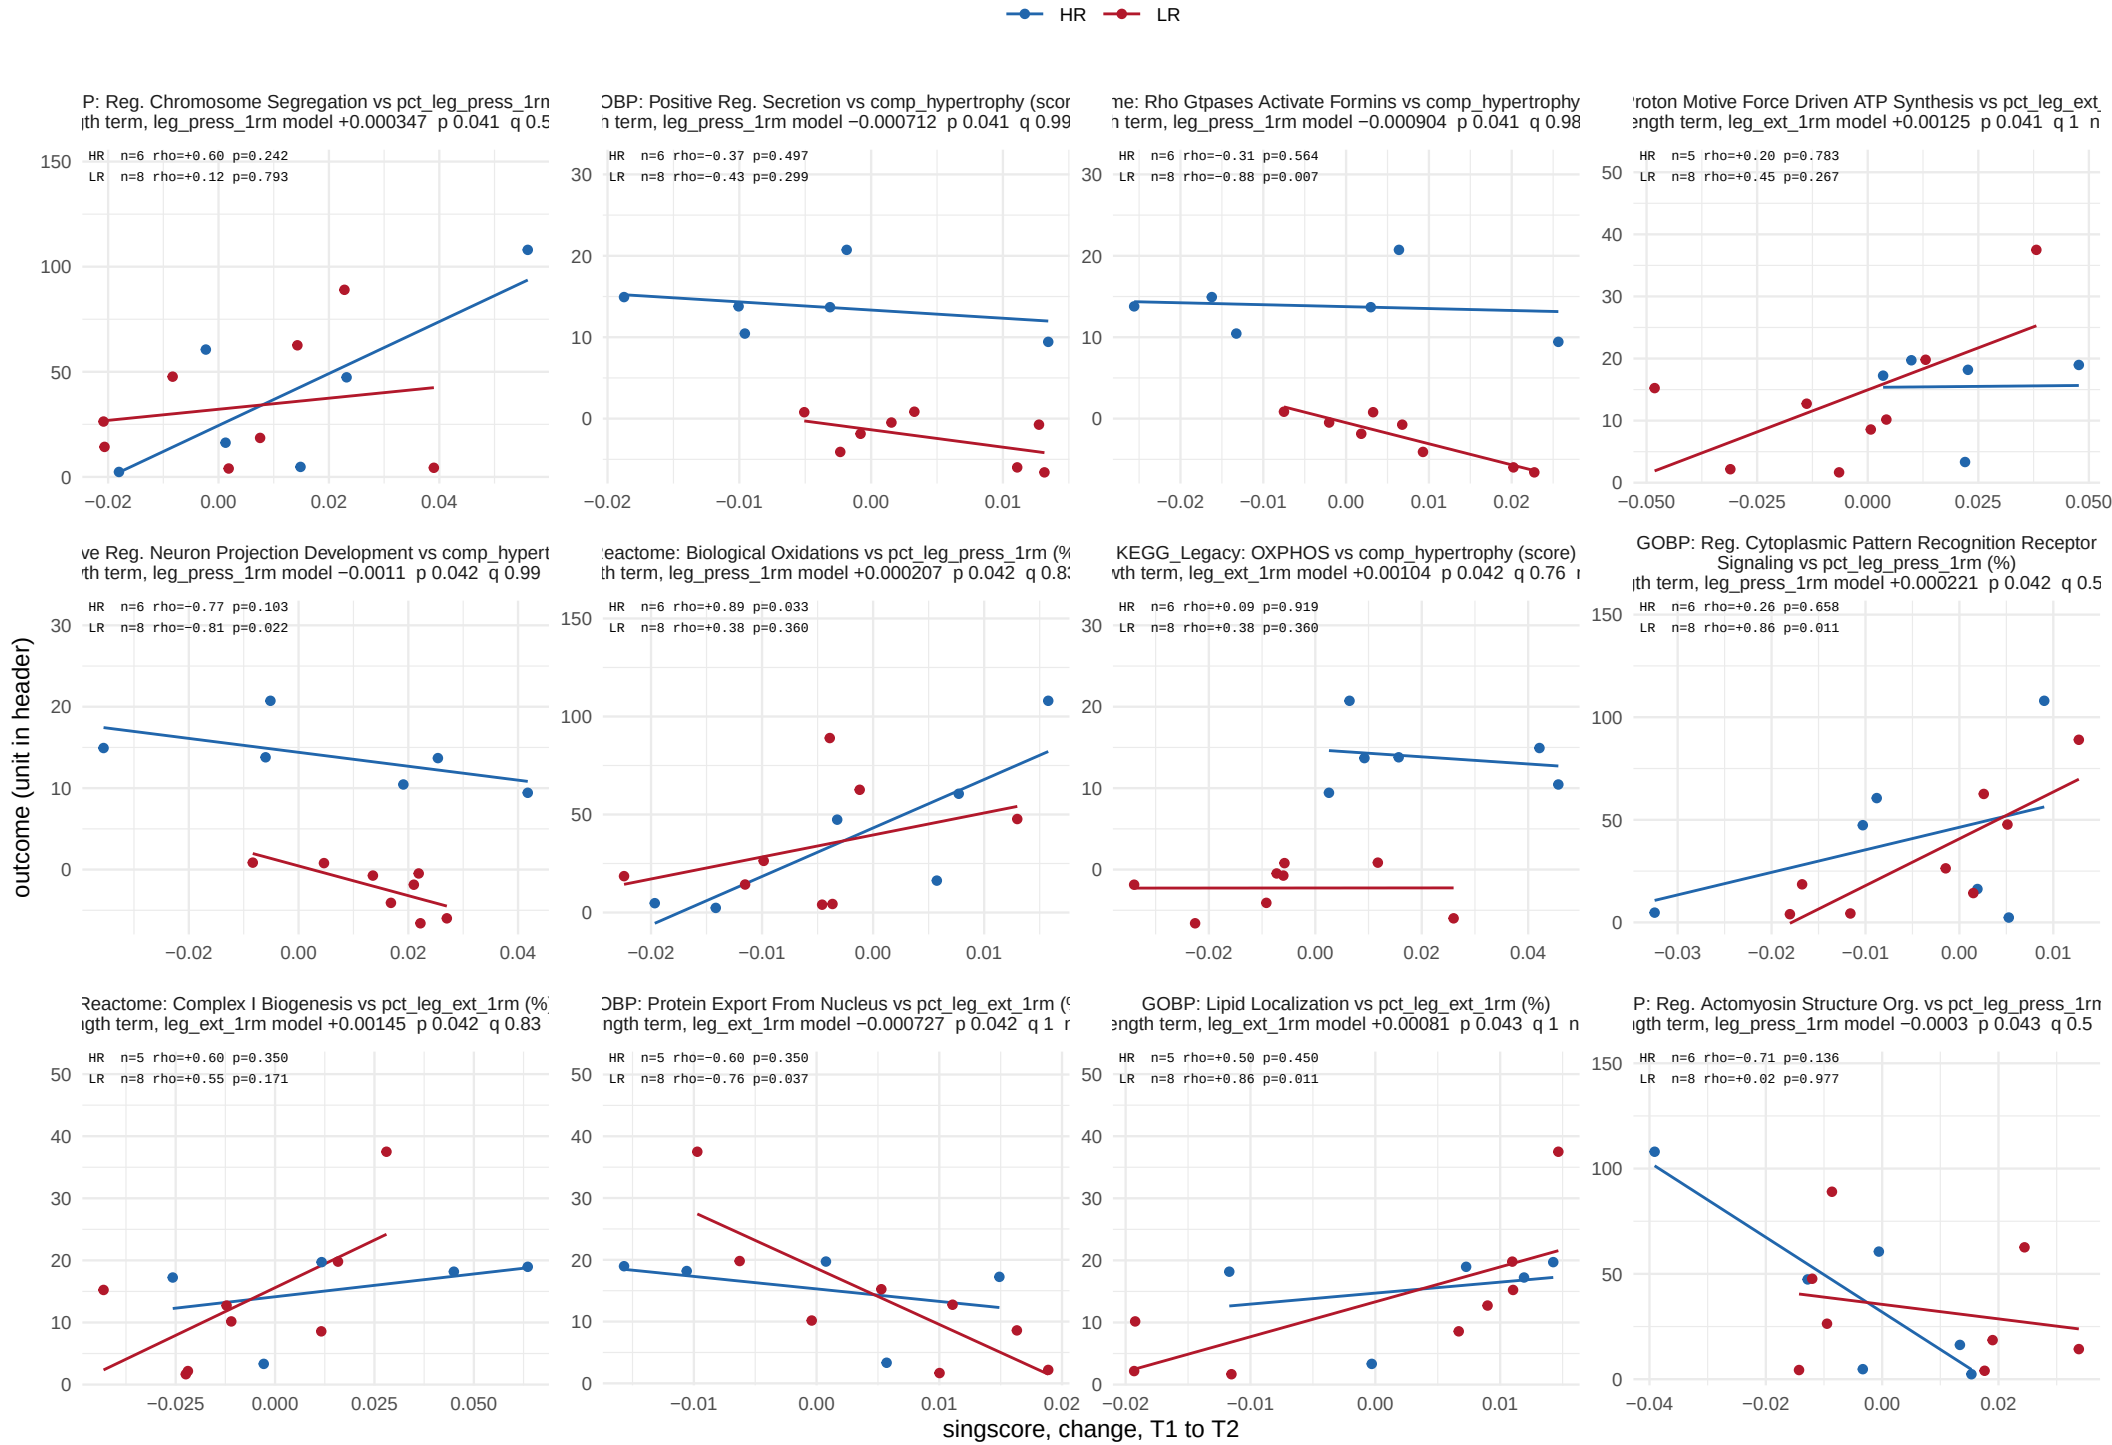


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

## Two predictor, training window


217 of 5512 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 16 of 19.




One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

## Two predictor, training window


217 of 5512 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 17 of 19.

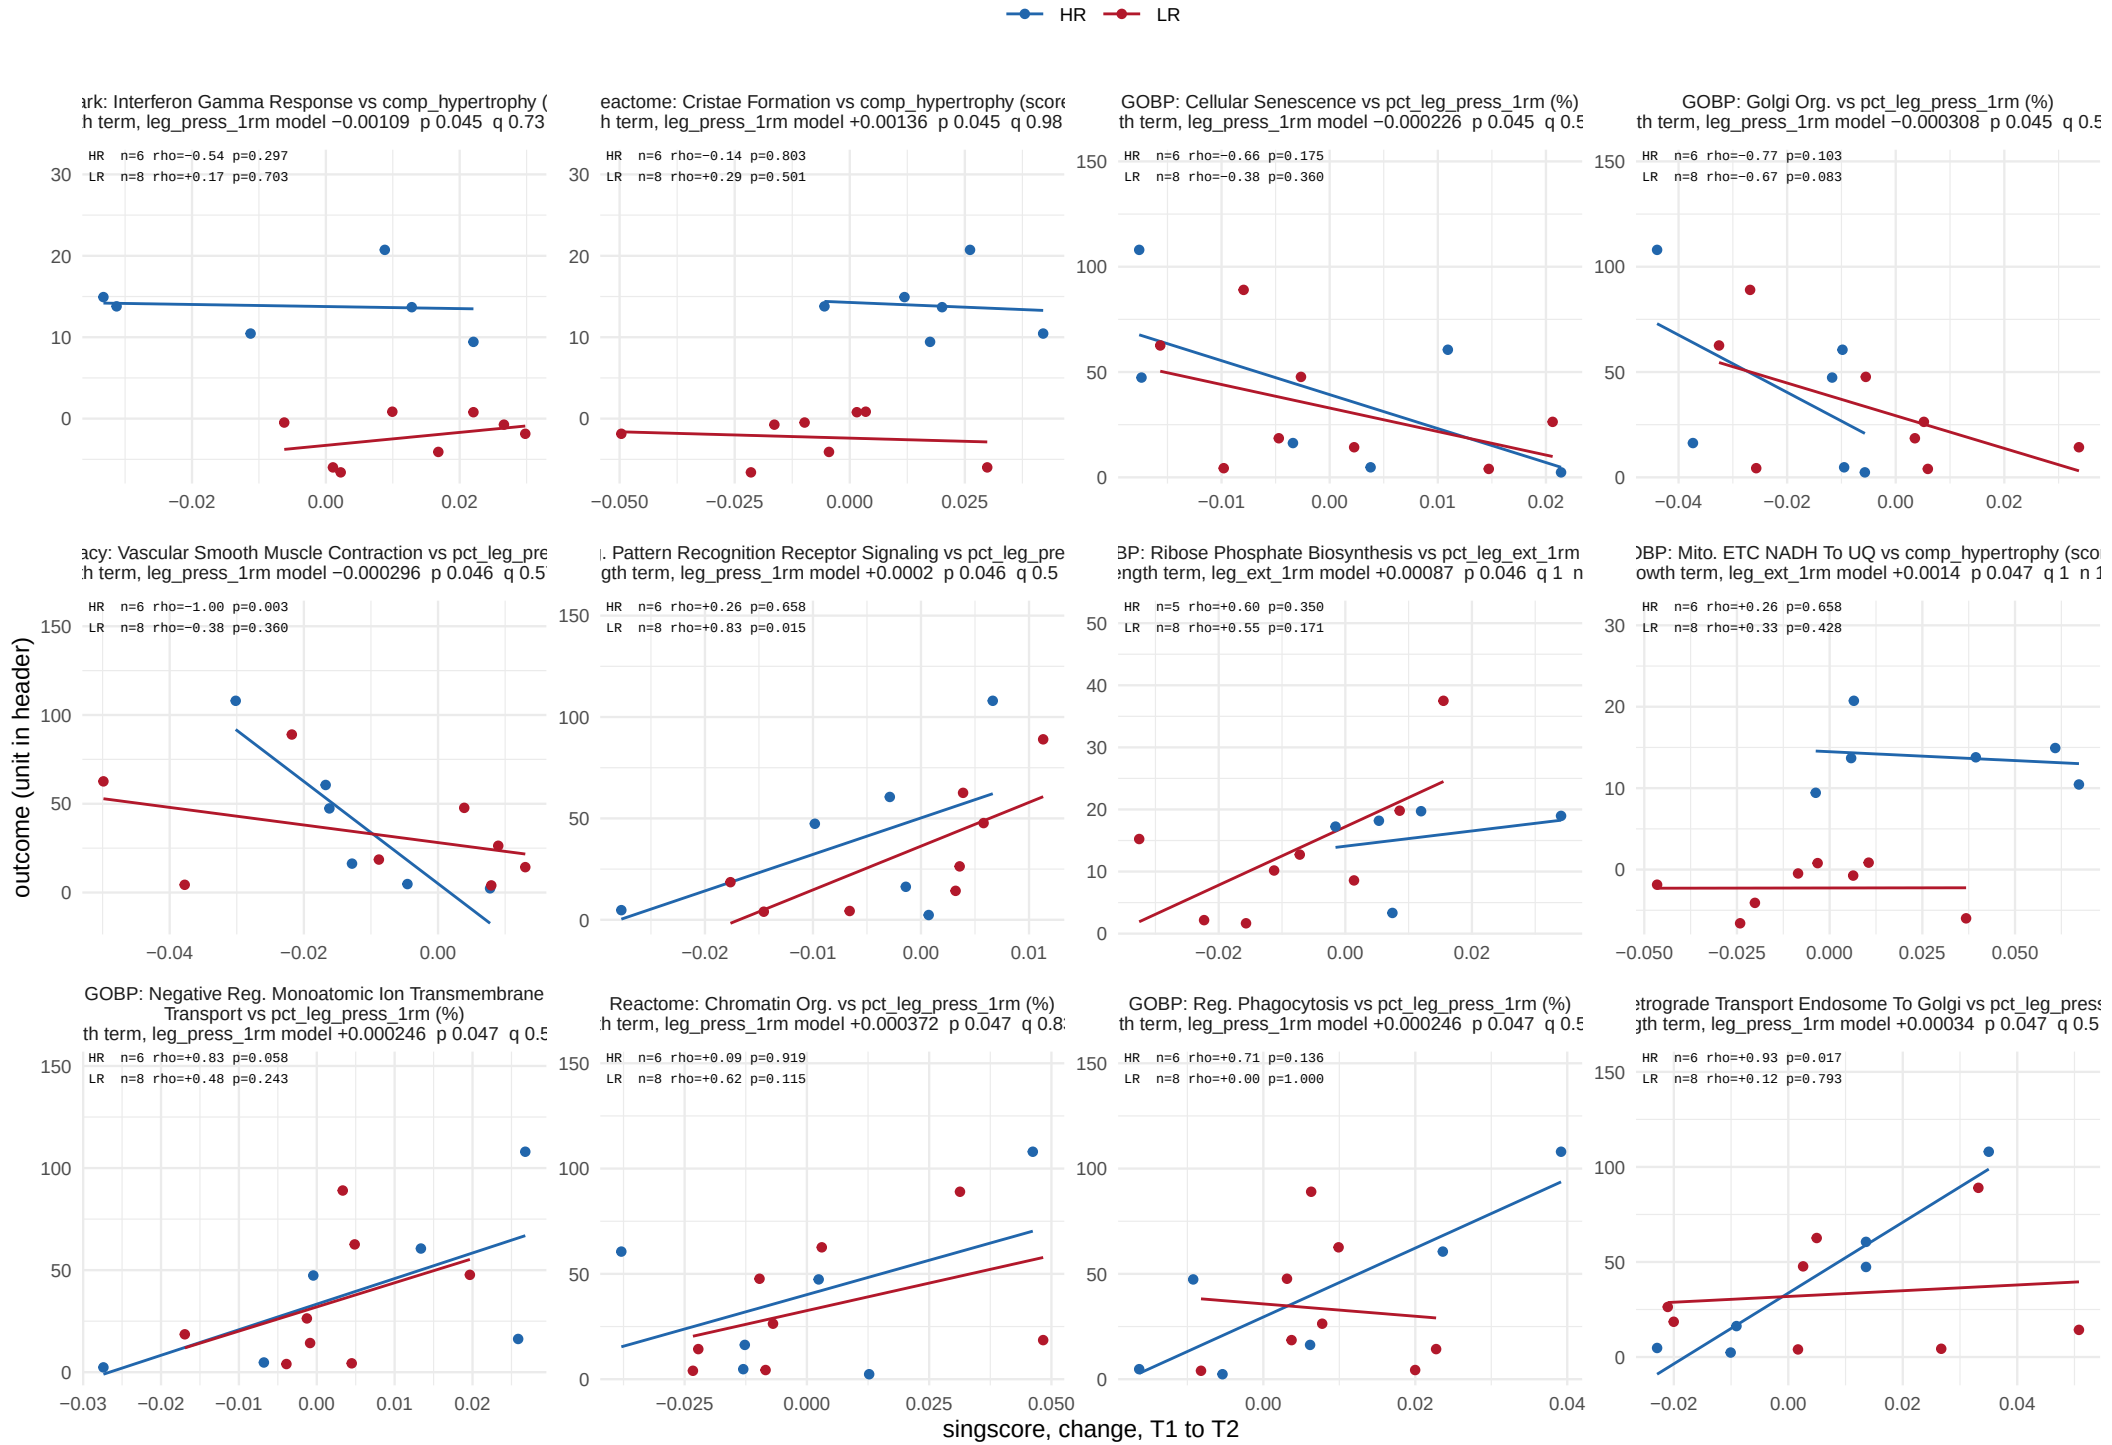


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

## Two predictor, training window


217 of 5512 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 18 of 19.

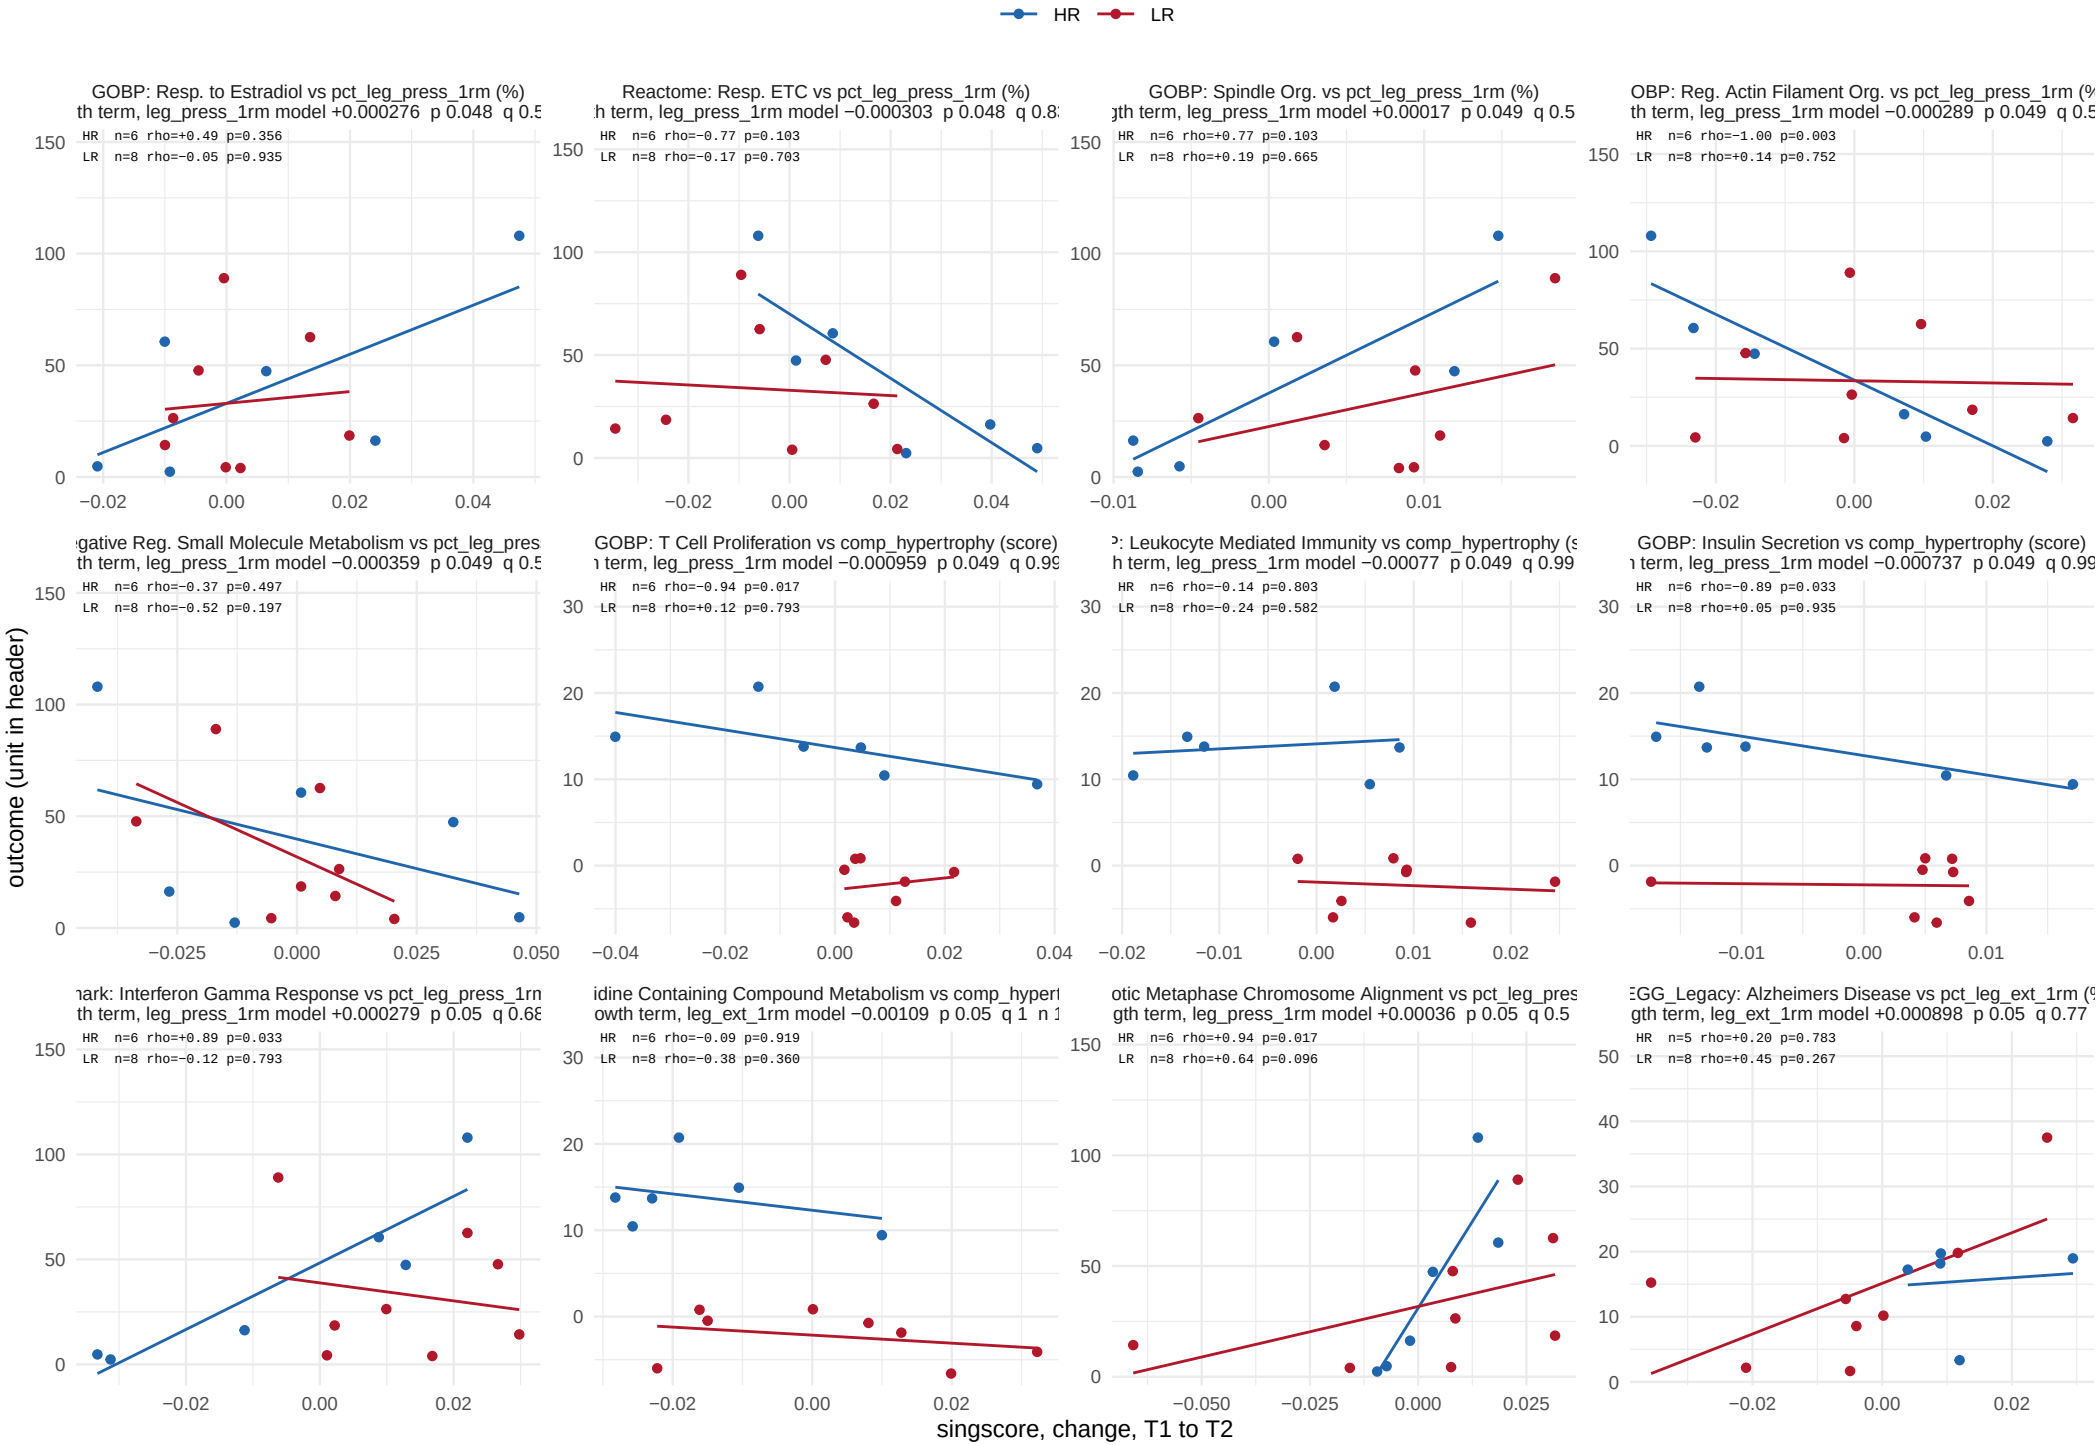


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

# Two predictor, training window




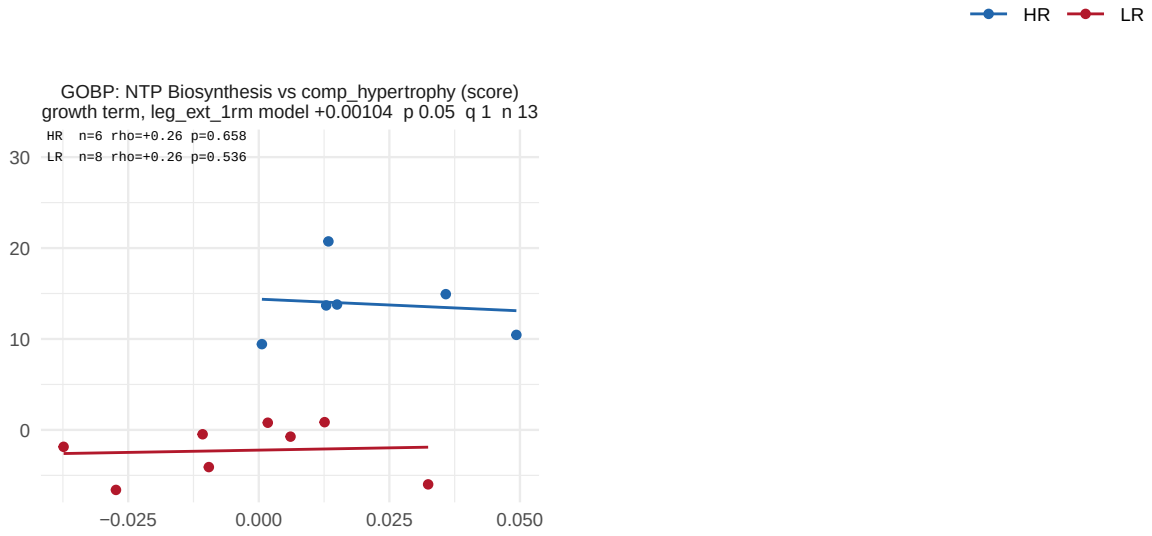


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

## Two predictor, baseline window


410 of 5512 feature−outcome pairs at p < 0.05, 20 at BH < 0.05. Page 1 of 35.

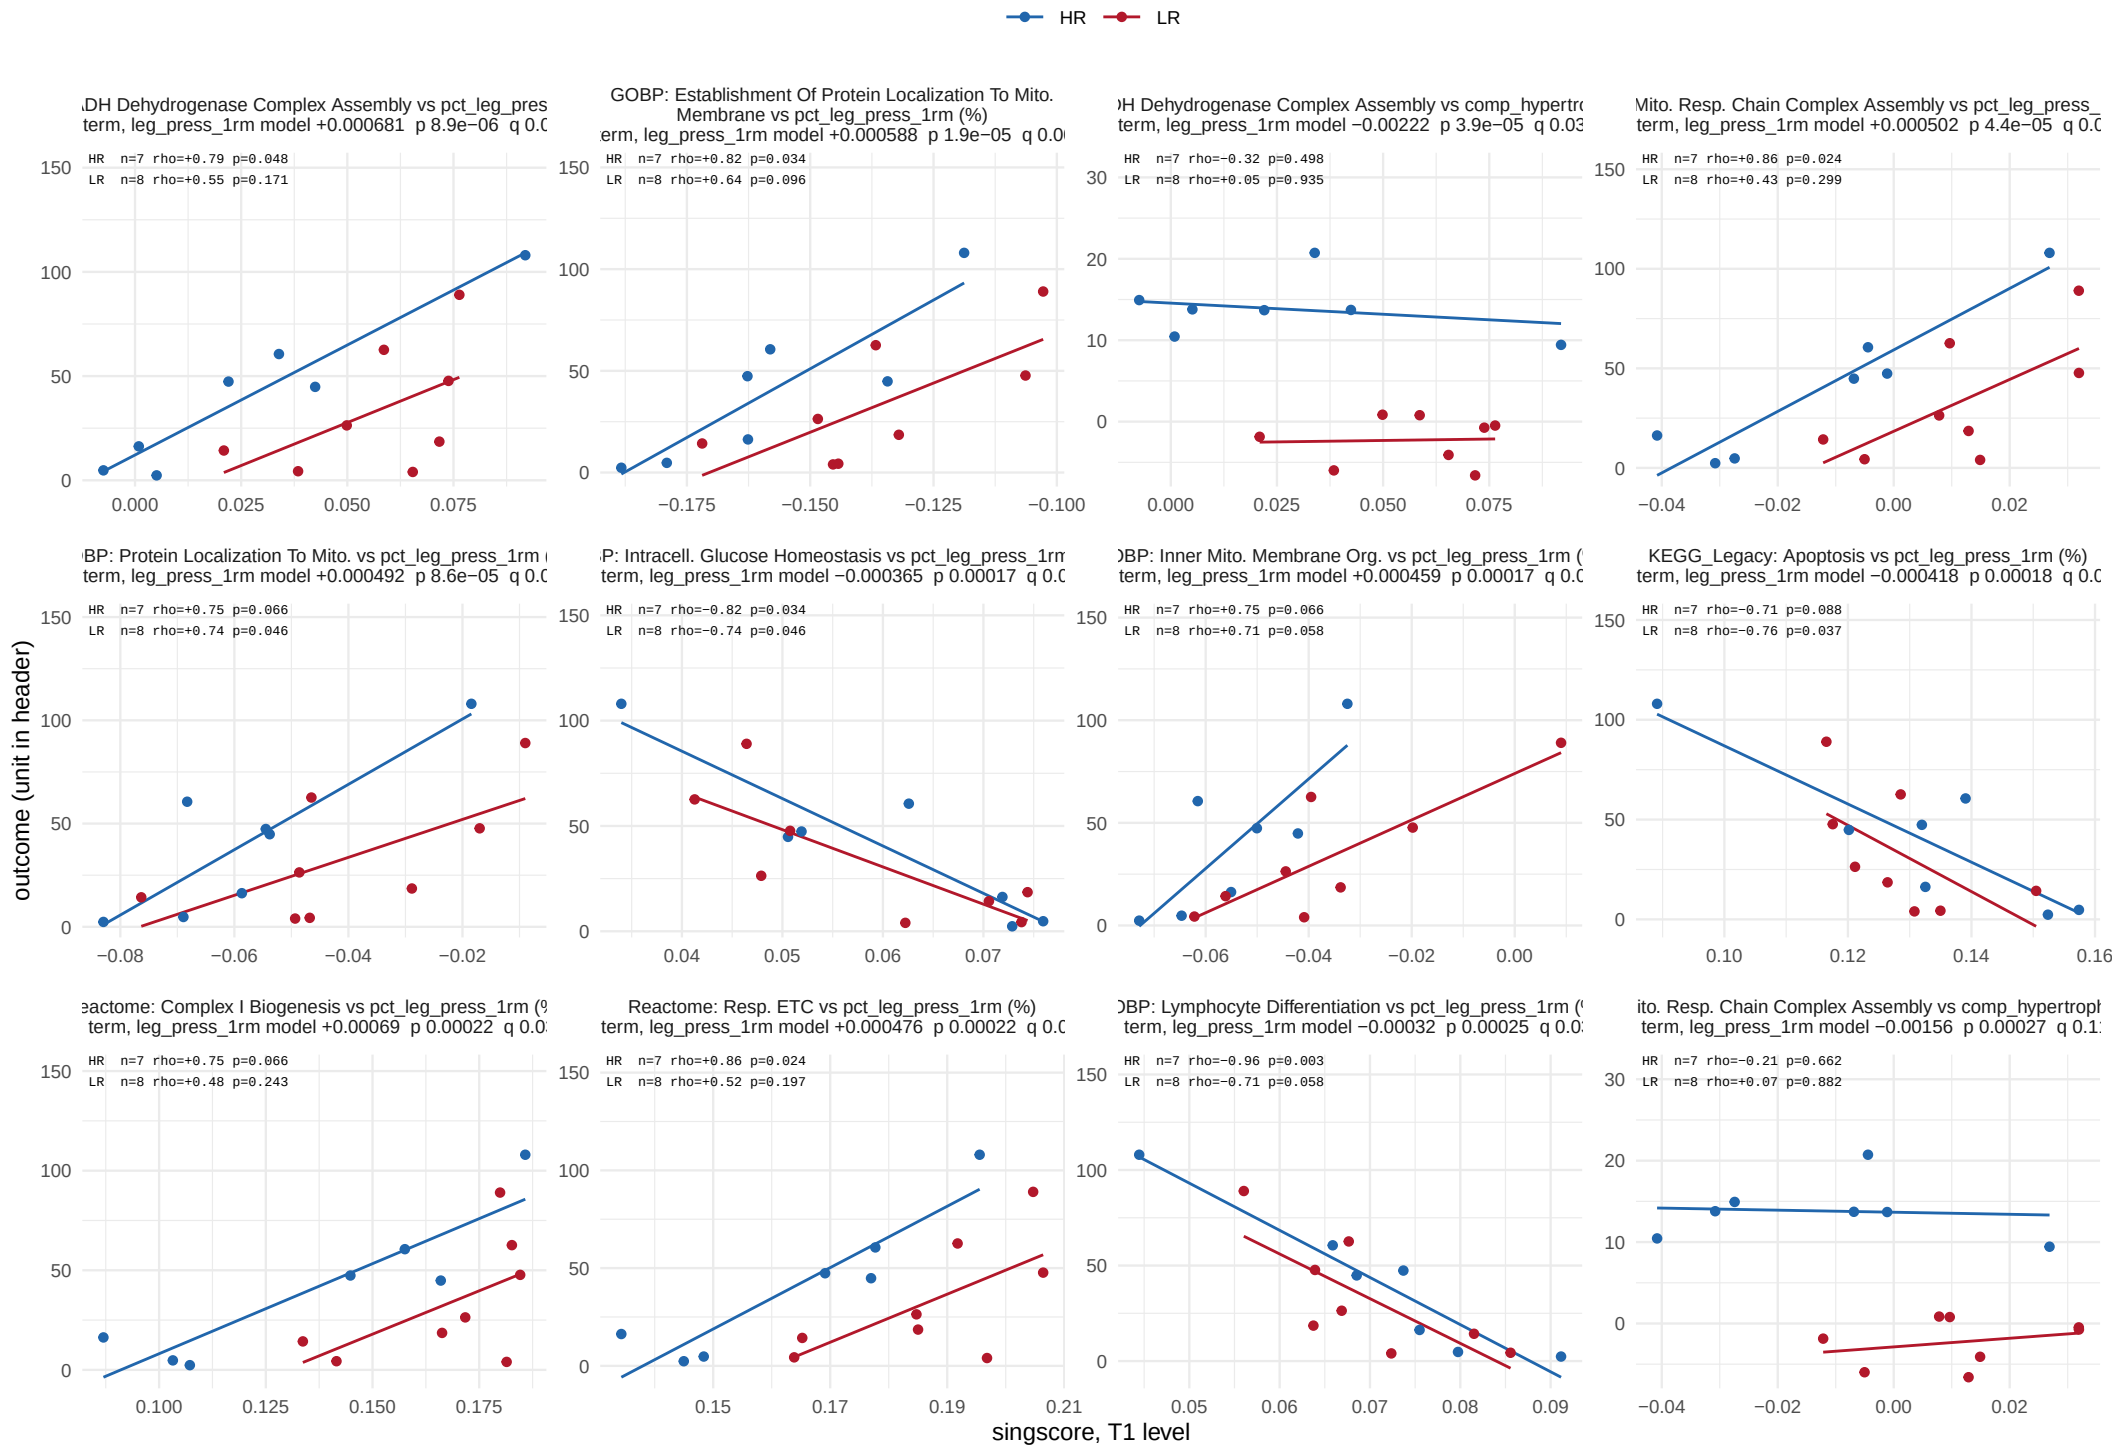


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

## Two predictor, baseline window


410 of 5512 feature−outcome pairs at p < 0.05, 20 at BH < 0.05. Page 2 of 35.

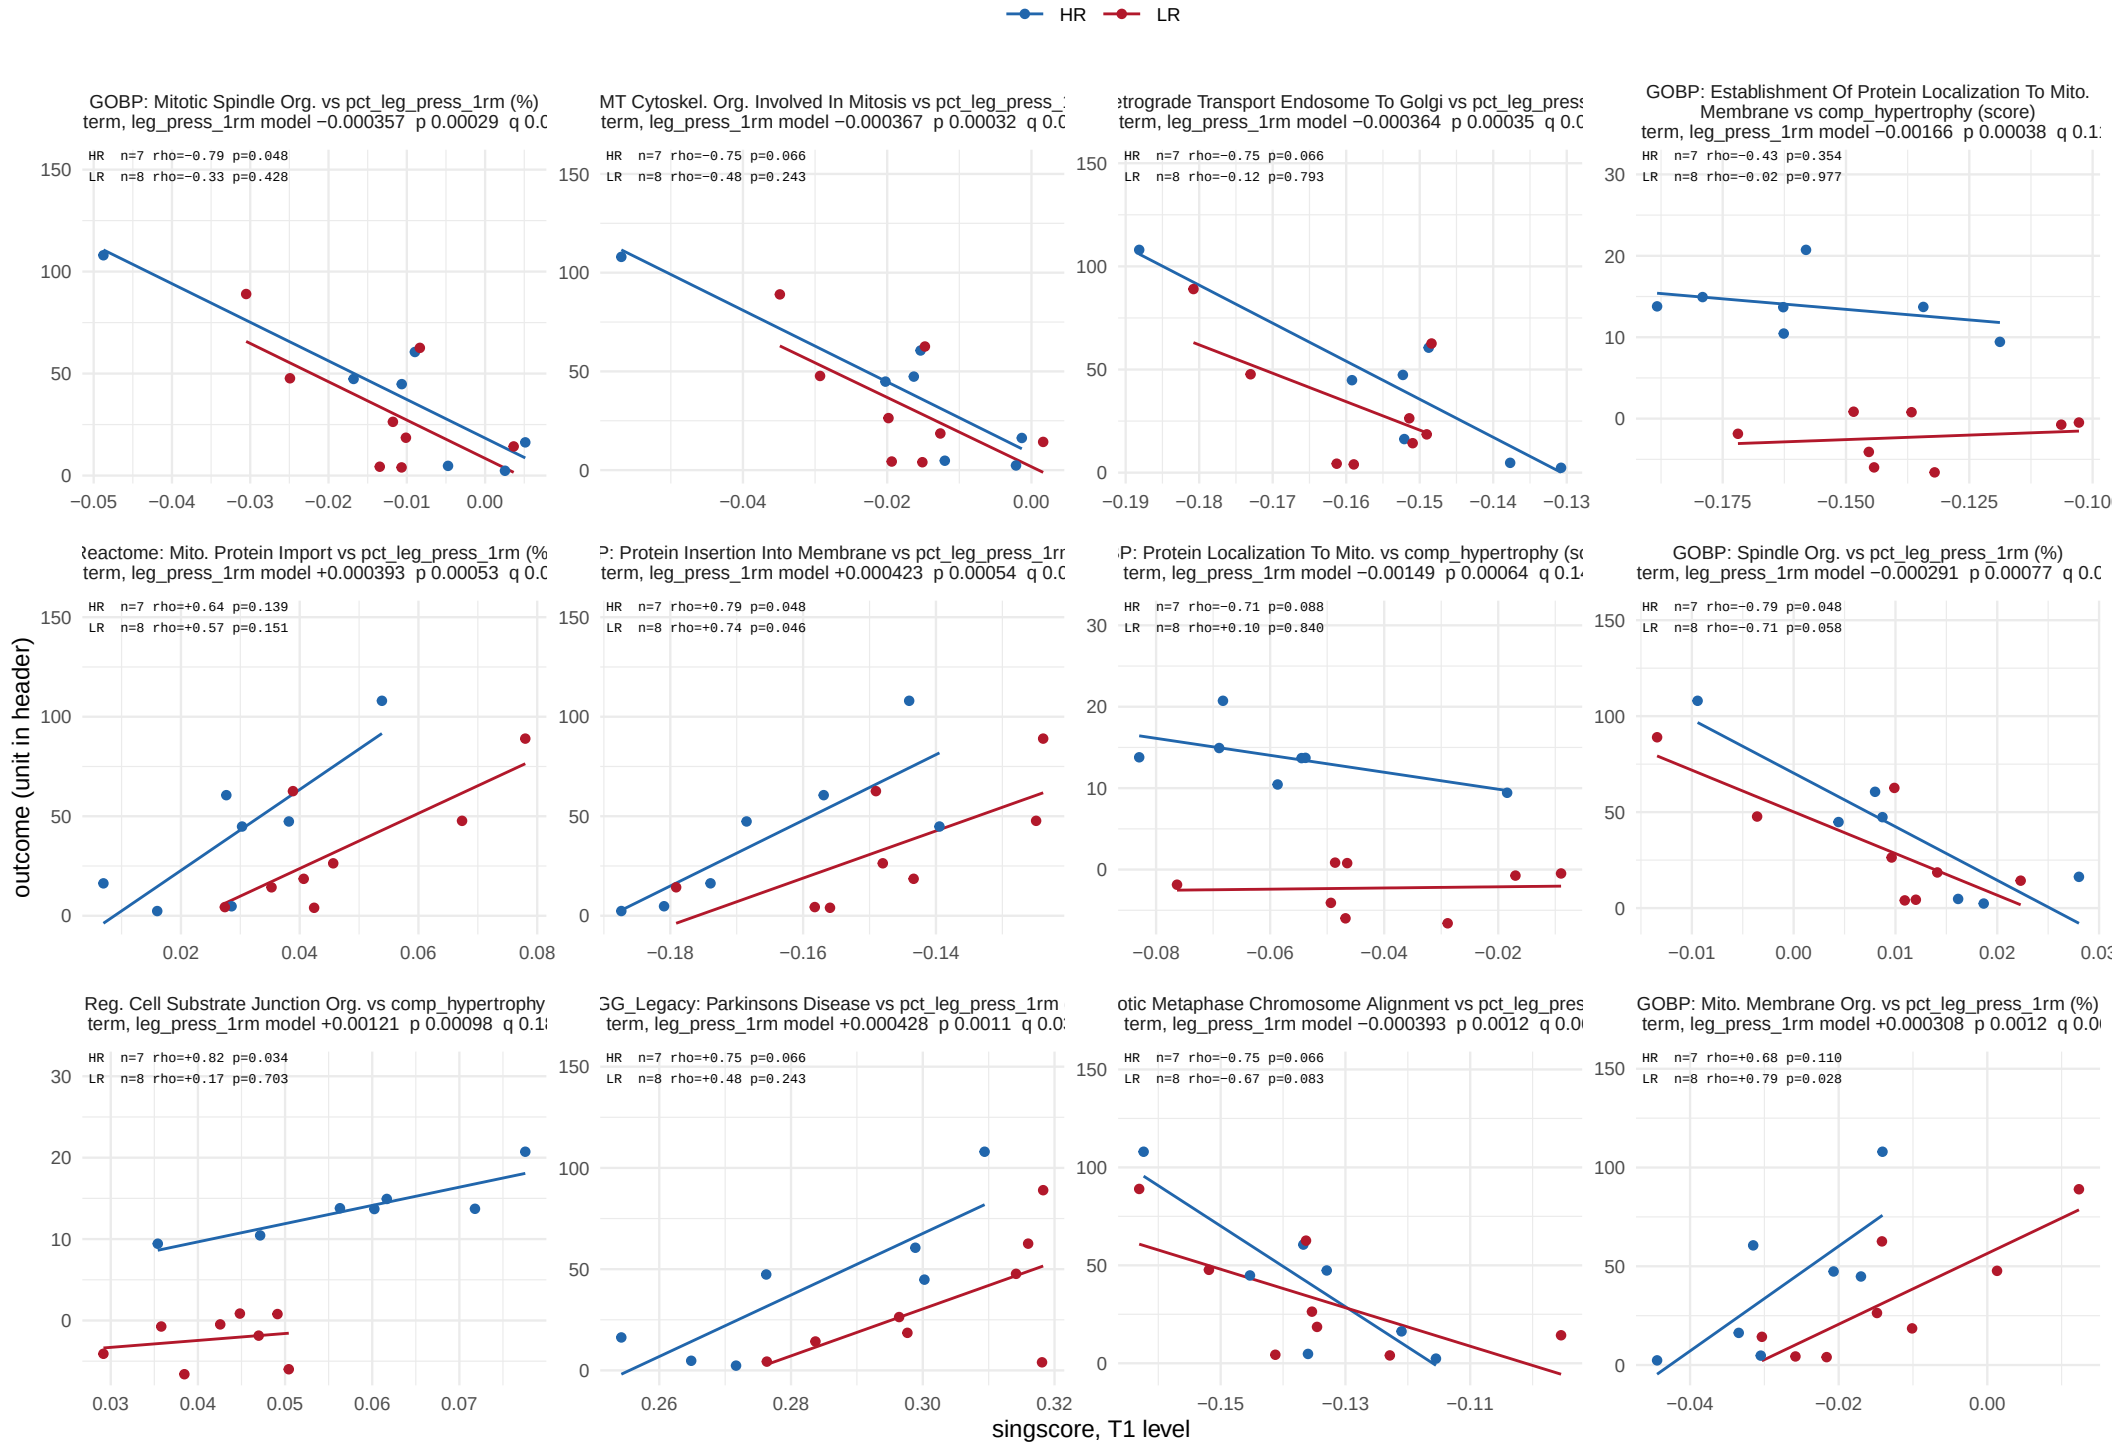


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

## Two predictor, baseline window


410 of 5512 feature−outcome pairs at p < 0.05, 20 at BH < 0.05. Page 3 of 35.

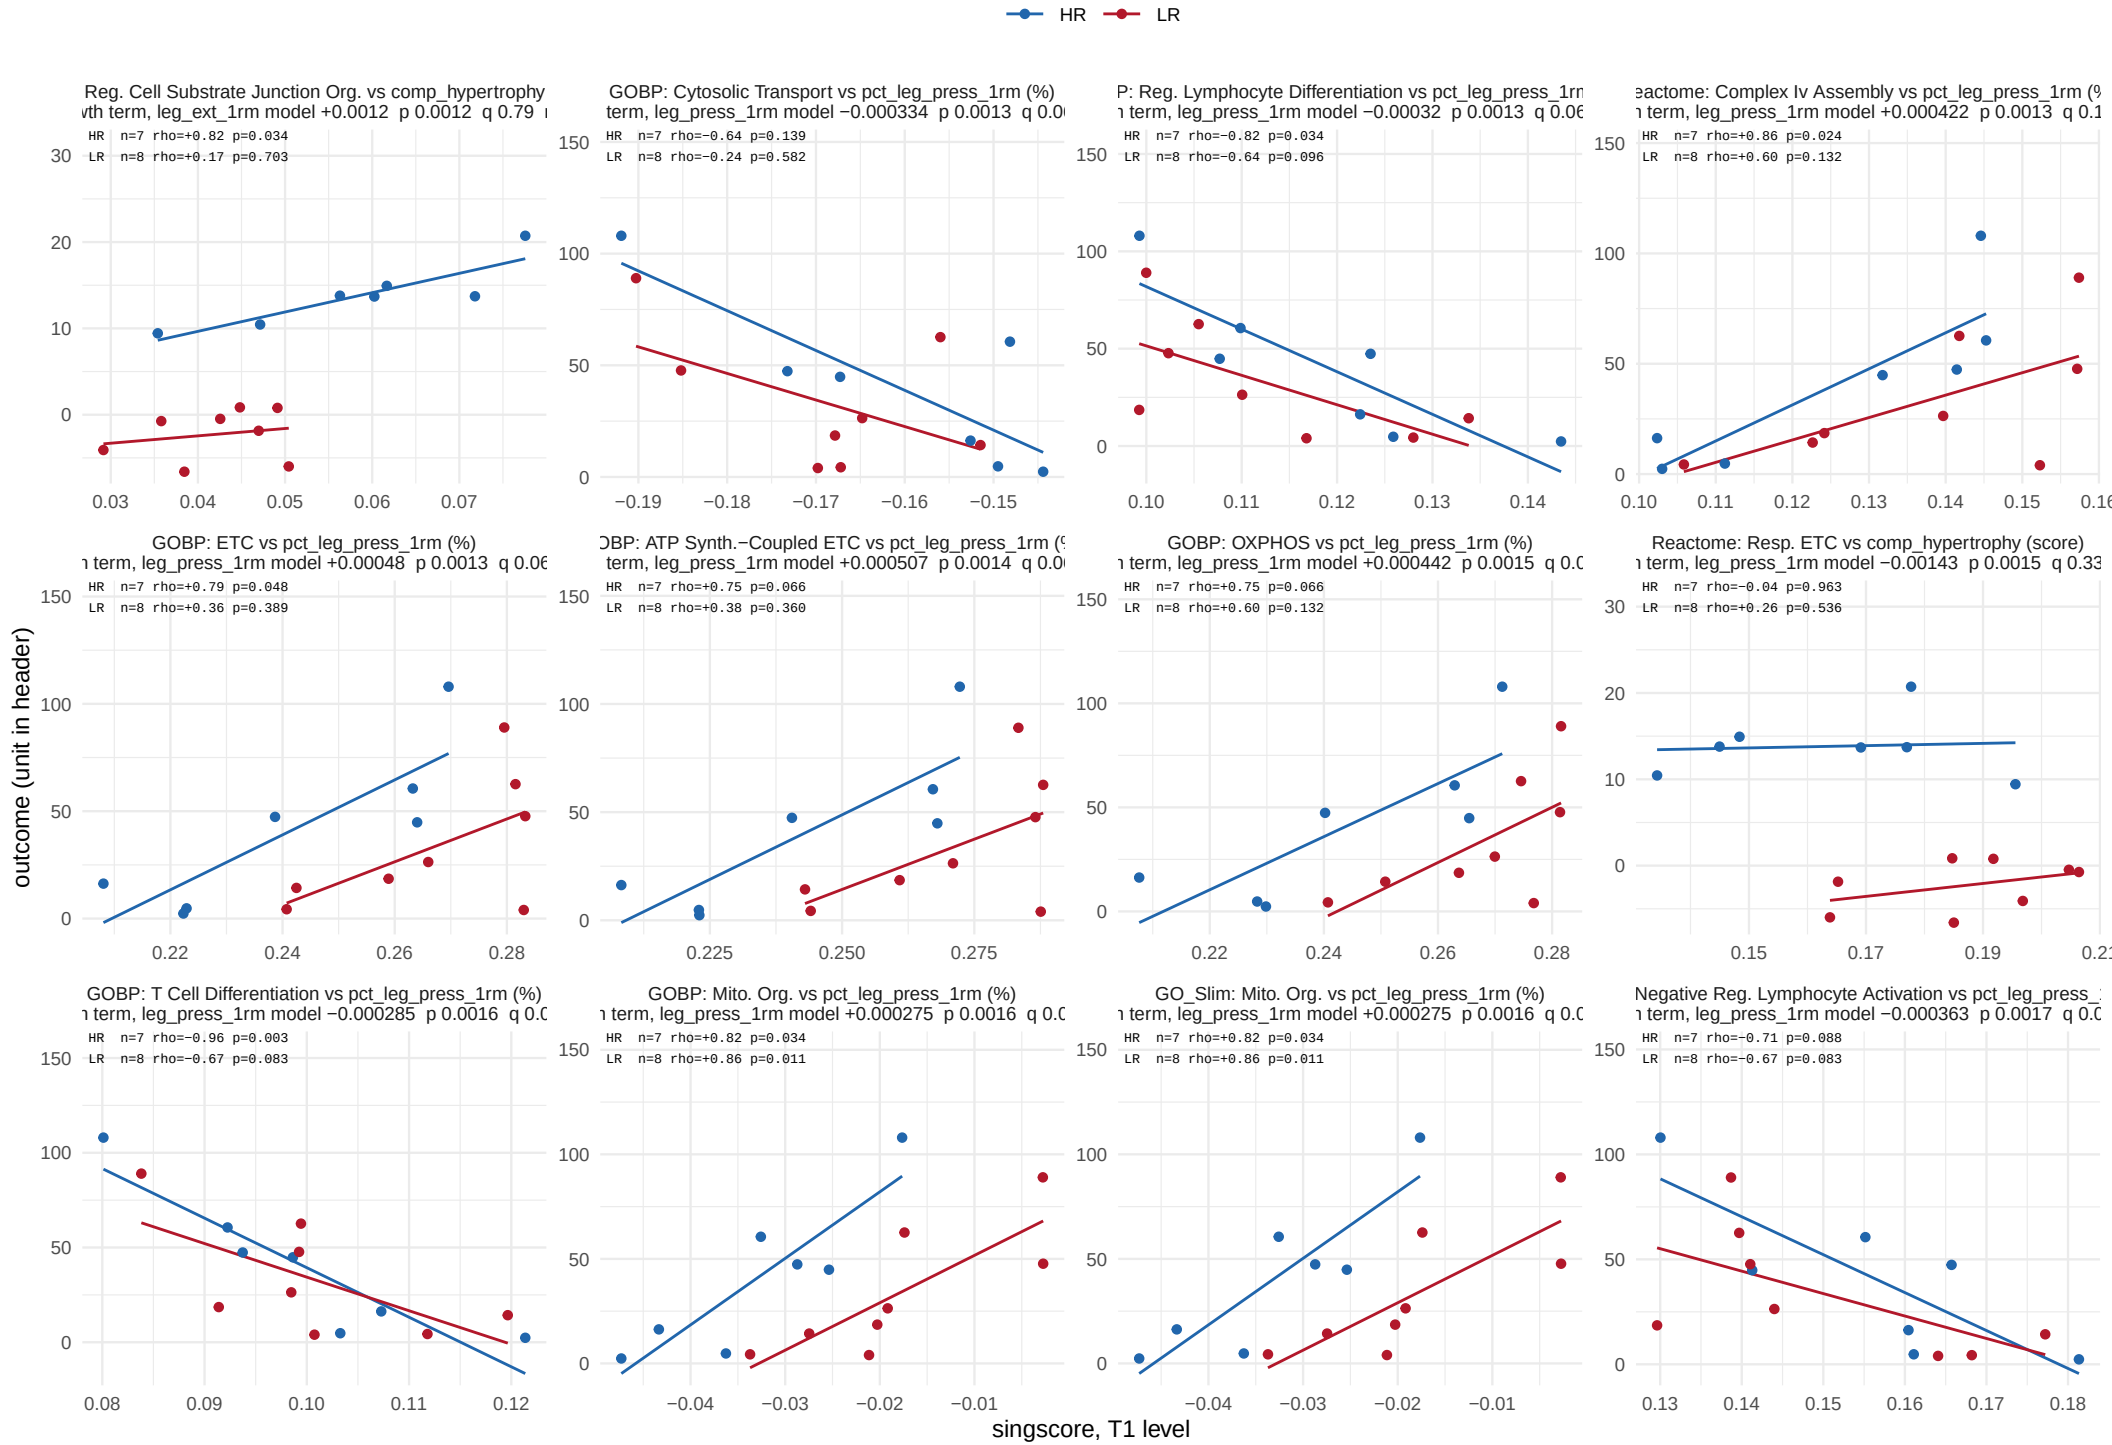


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

## Two predictor, baseline window


410 of 5512 feature−outcome pairs at p < 0.05, 20 at BH < 0.05. Page 4 of 35.

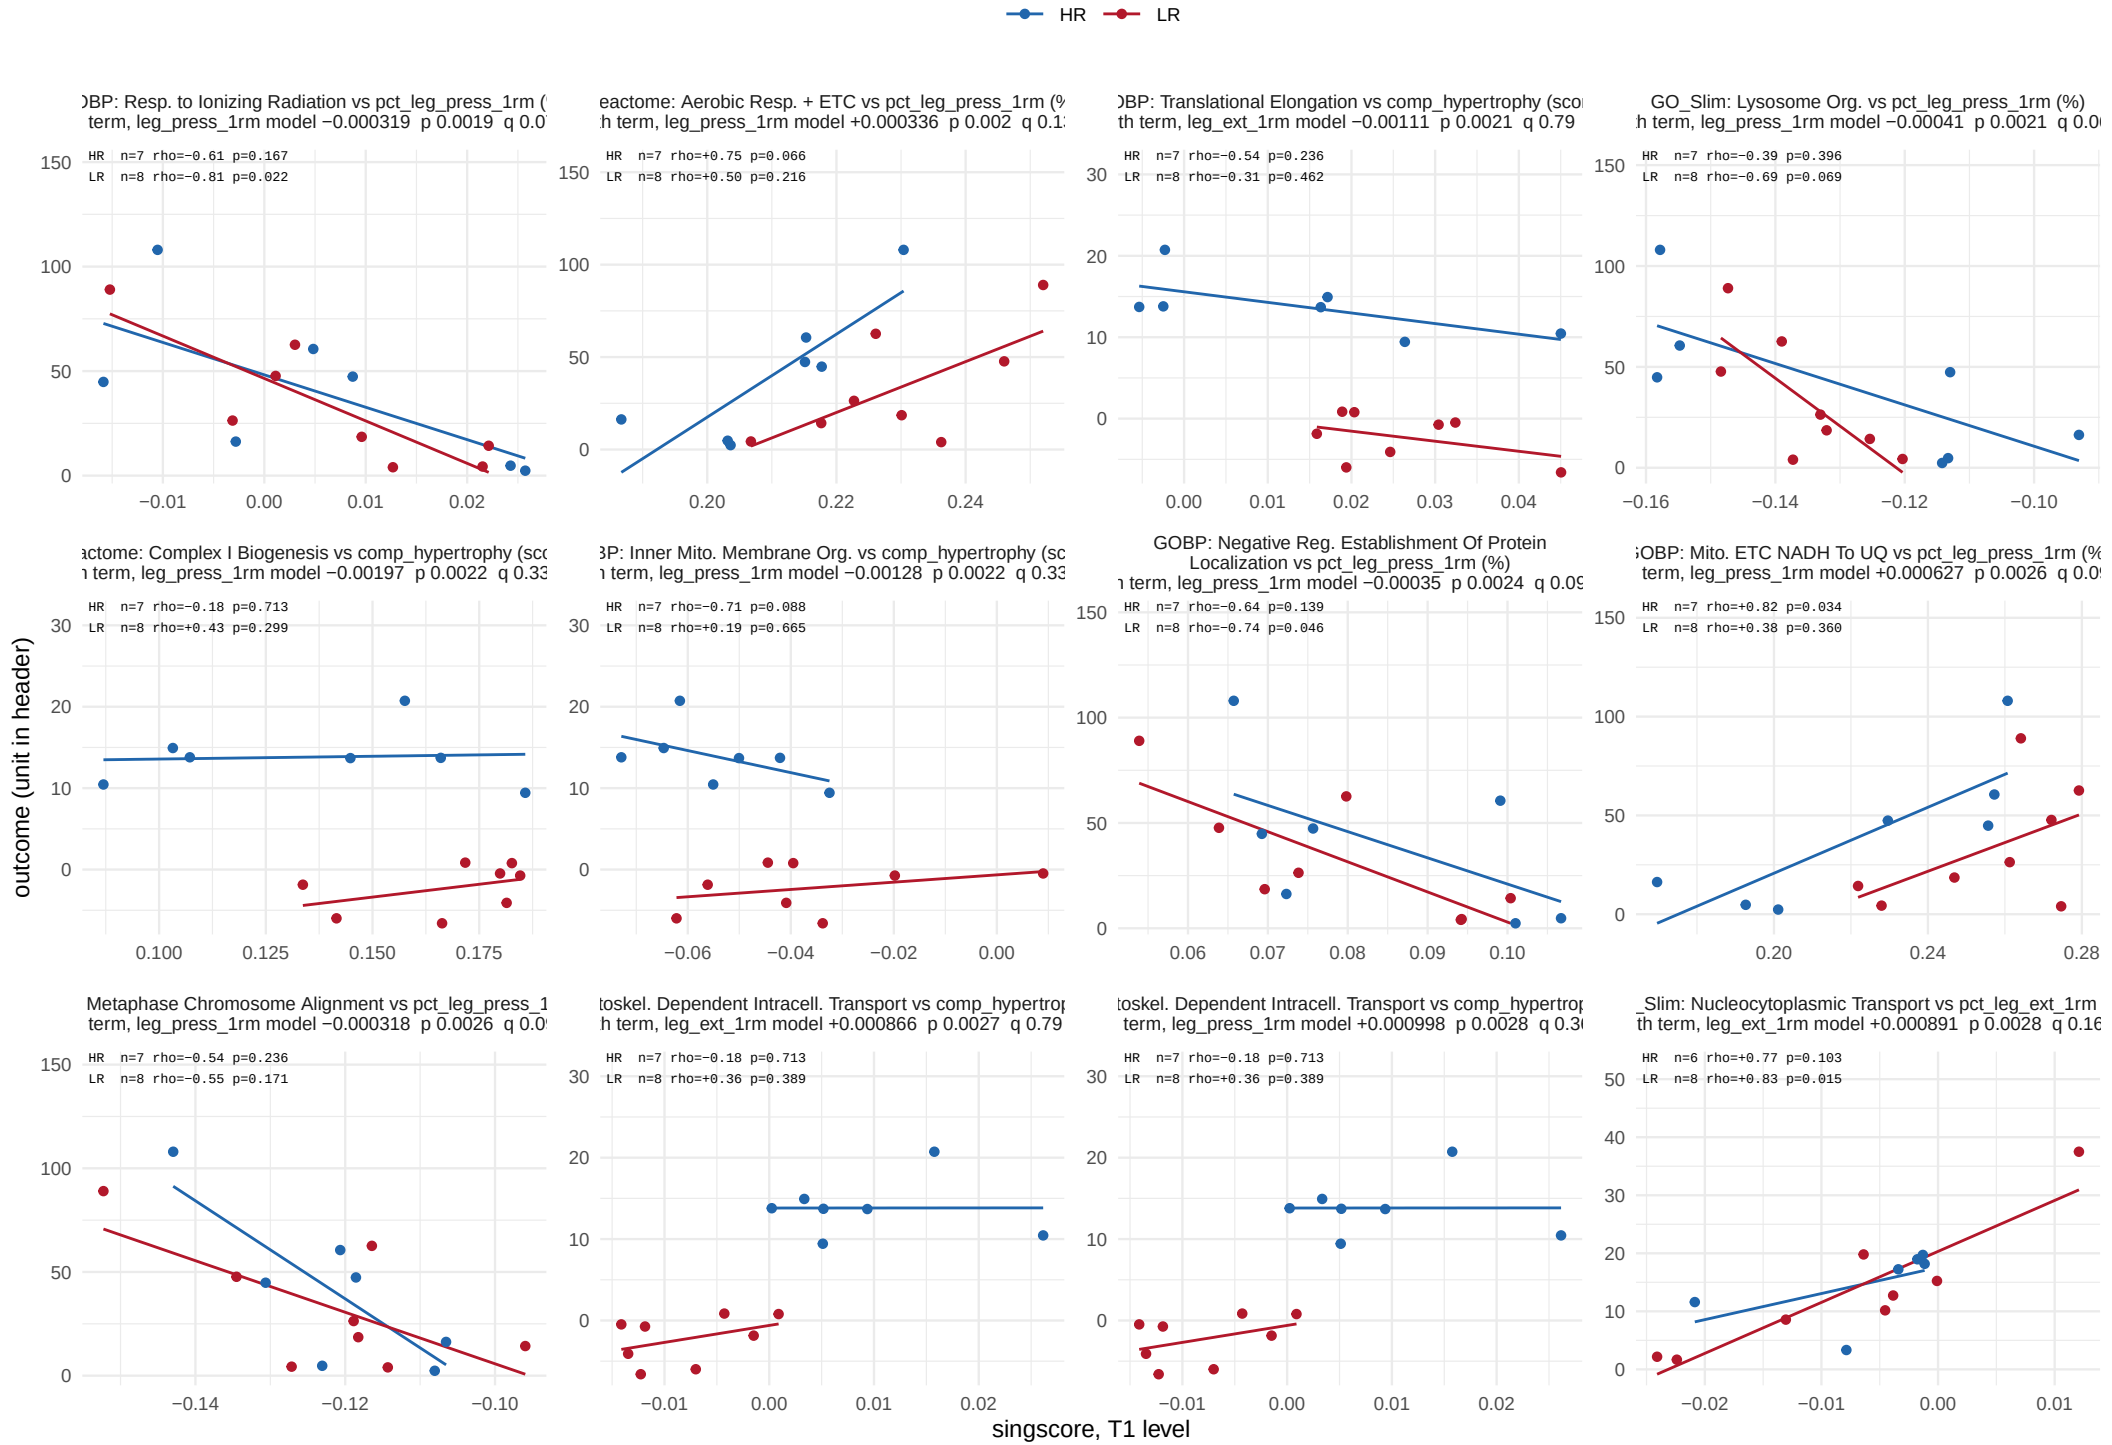


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

## Two predictor, baseline window


410 of 5512 feature−outcome pairs at p < 0.05, 20 at BH < 0.05. Page 5 of 35.

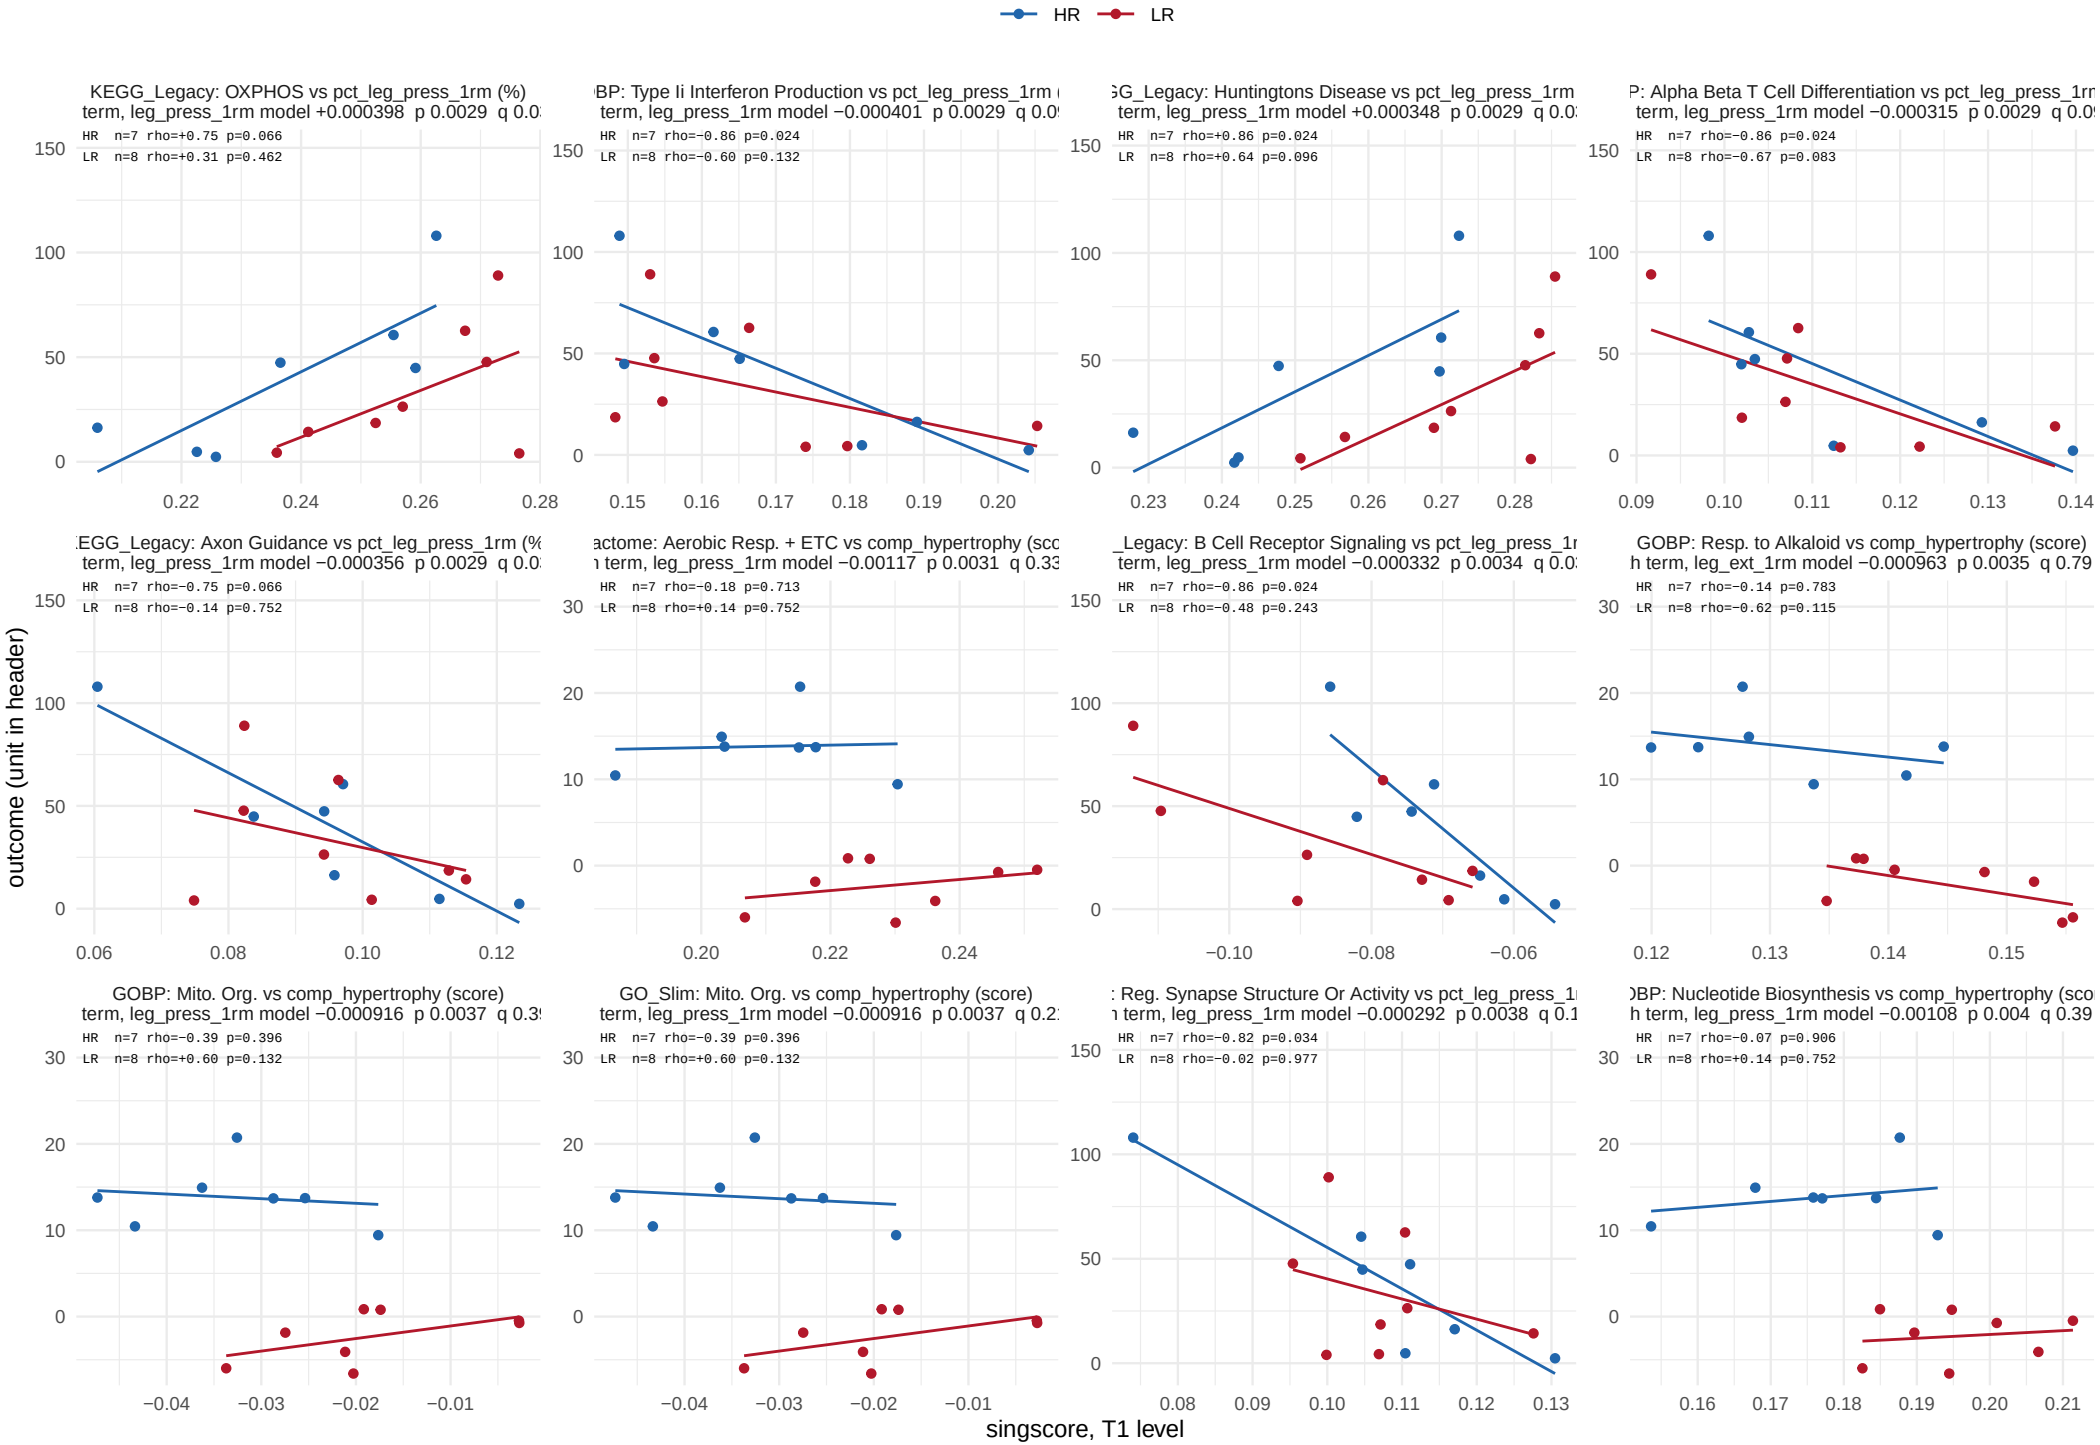


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

## Two predictor, baseline window


410 of 5512 feature−outcome pairs at p < 0.05, 20 at BH < 0.05. Page 6 of 35.

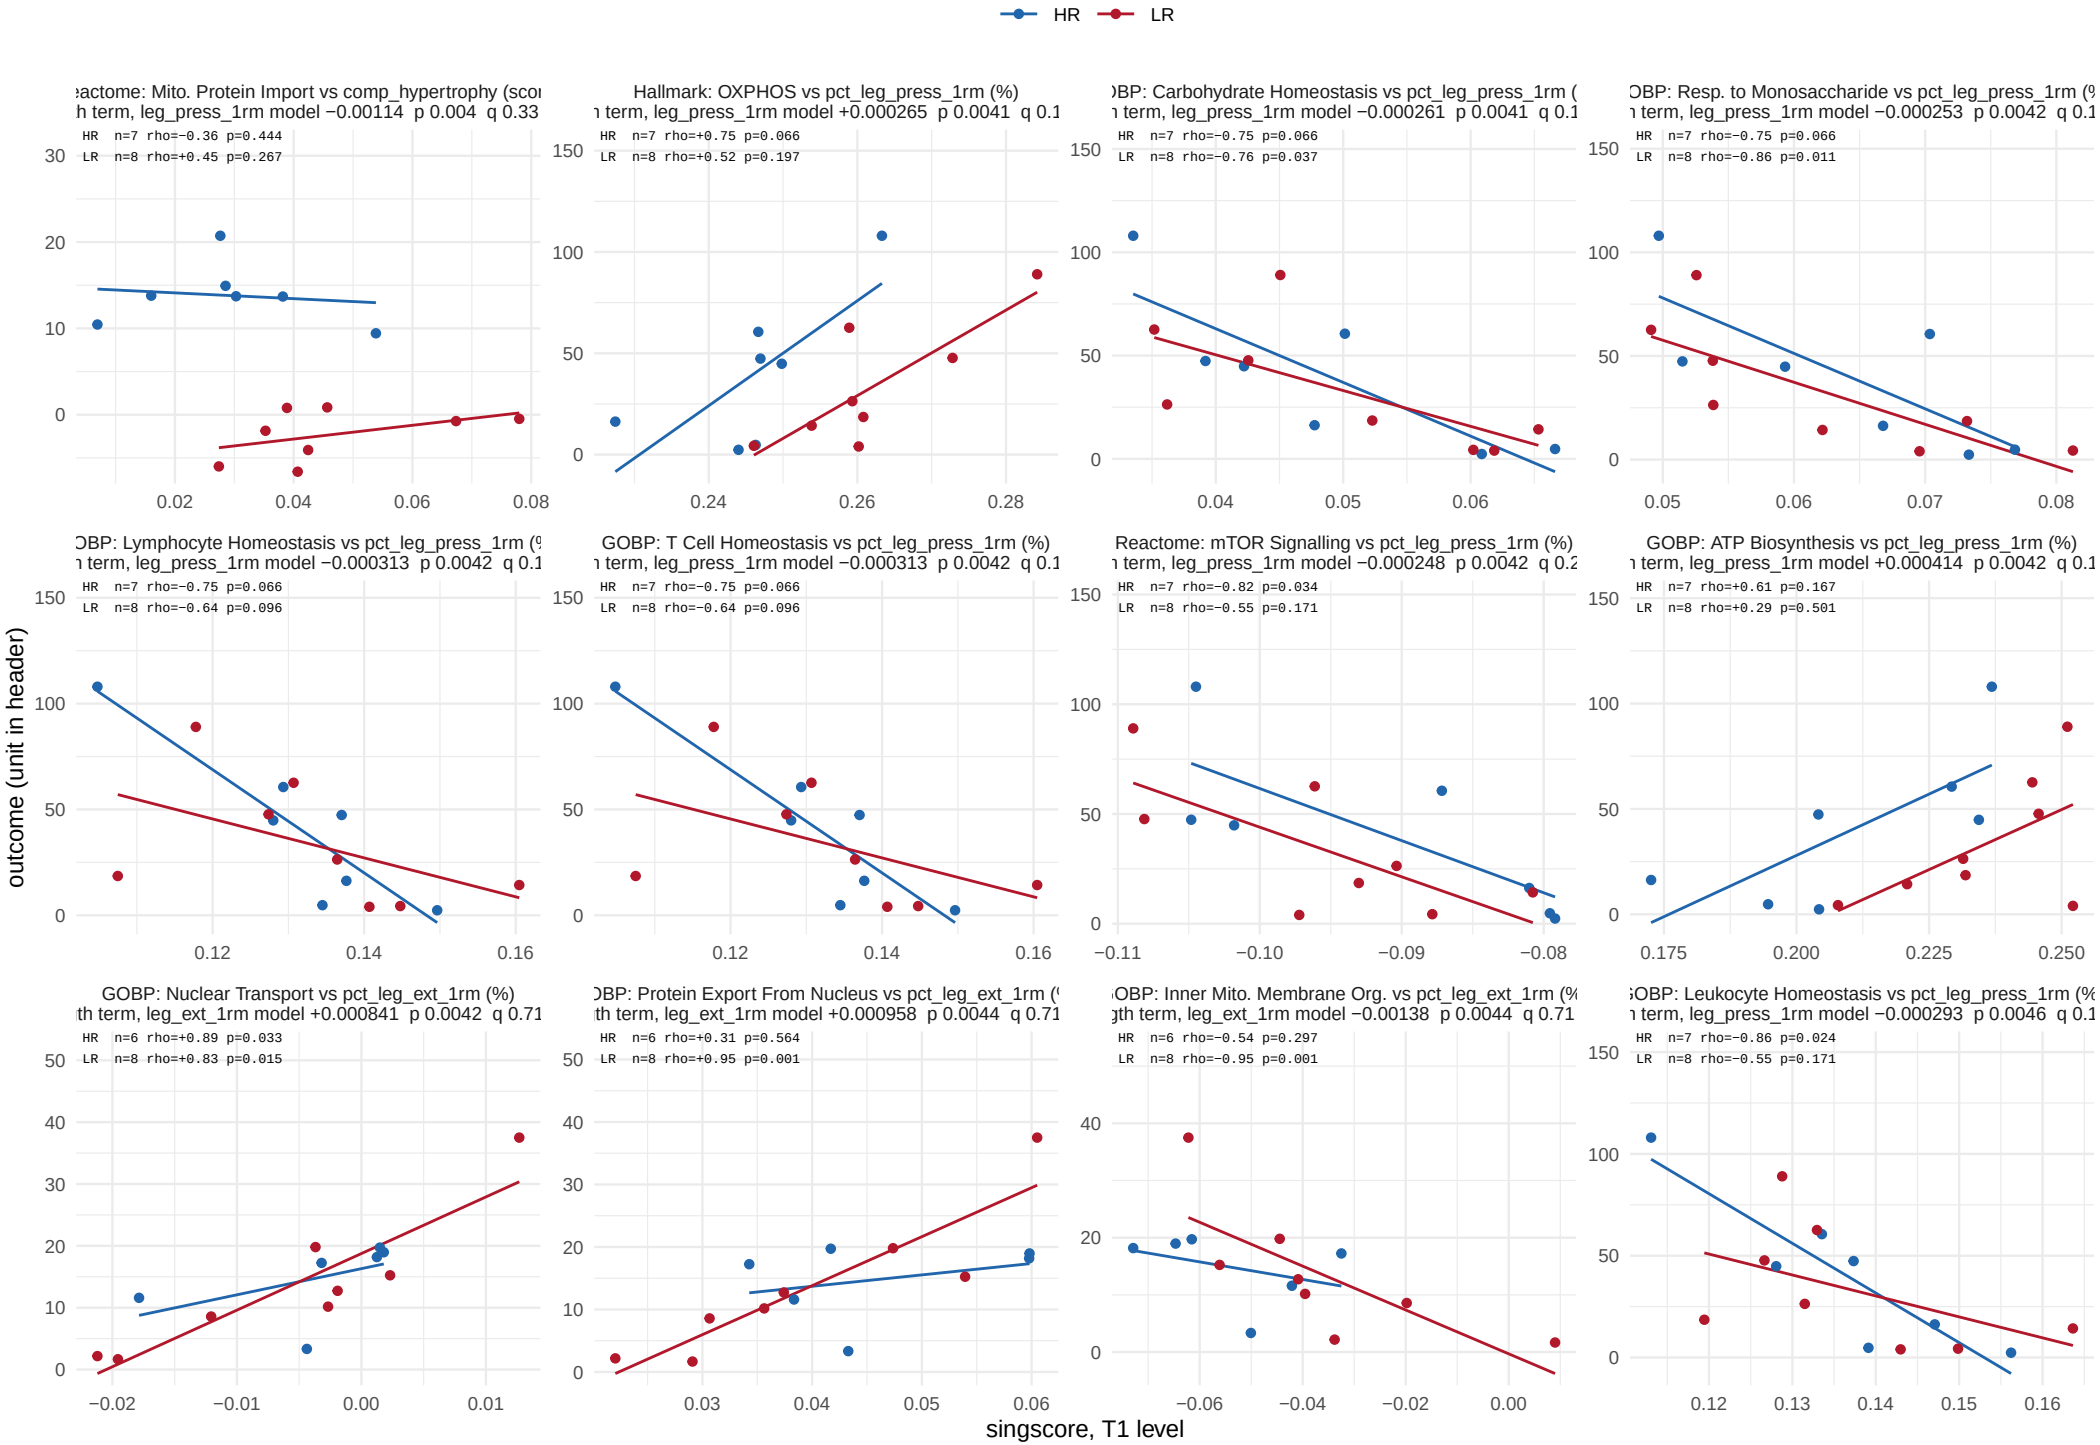


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

## Two predictor, baseline window


410 of 5512 feature−outcome pairs at p < 0.05, 20 at BH < 0.05. Page 7 of 35.

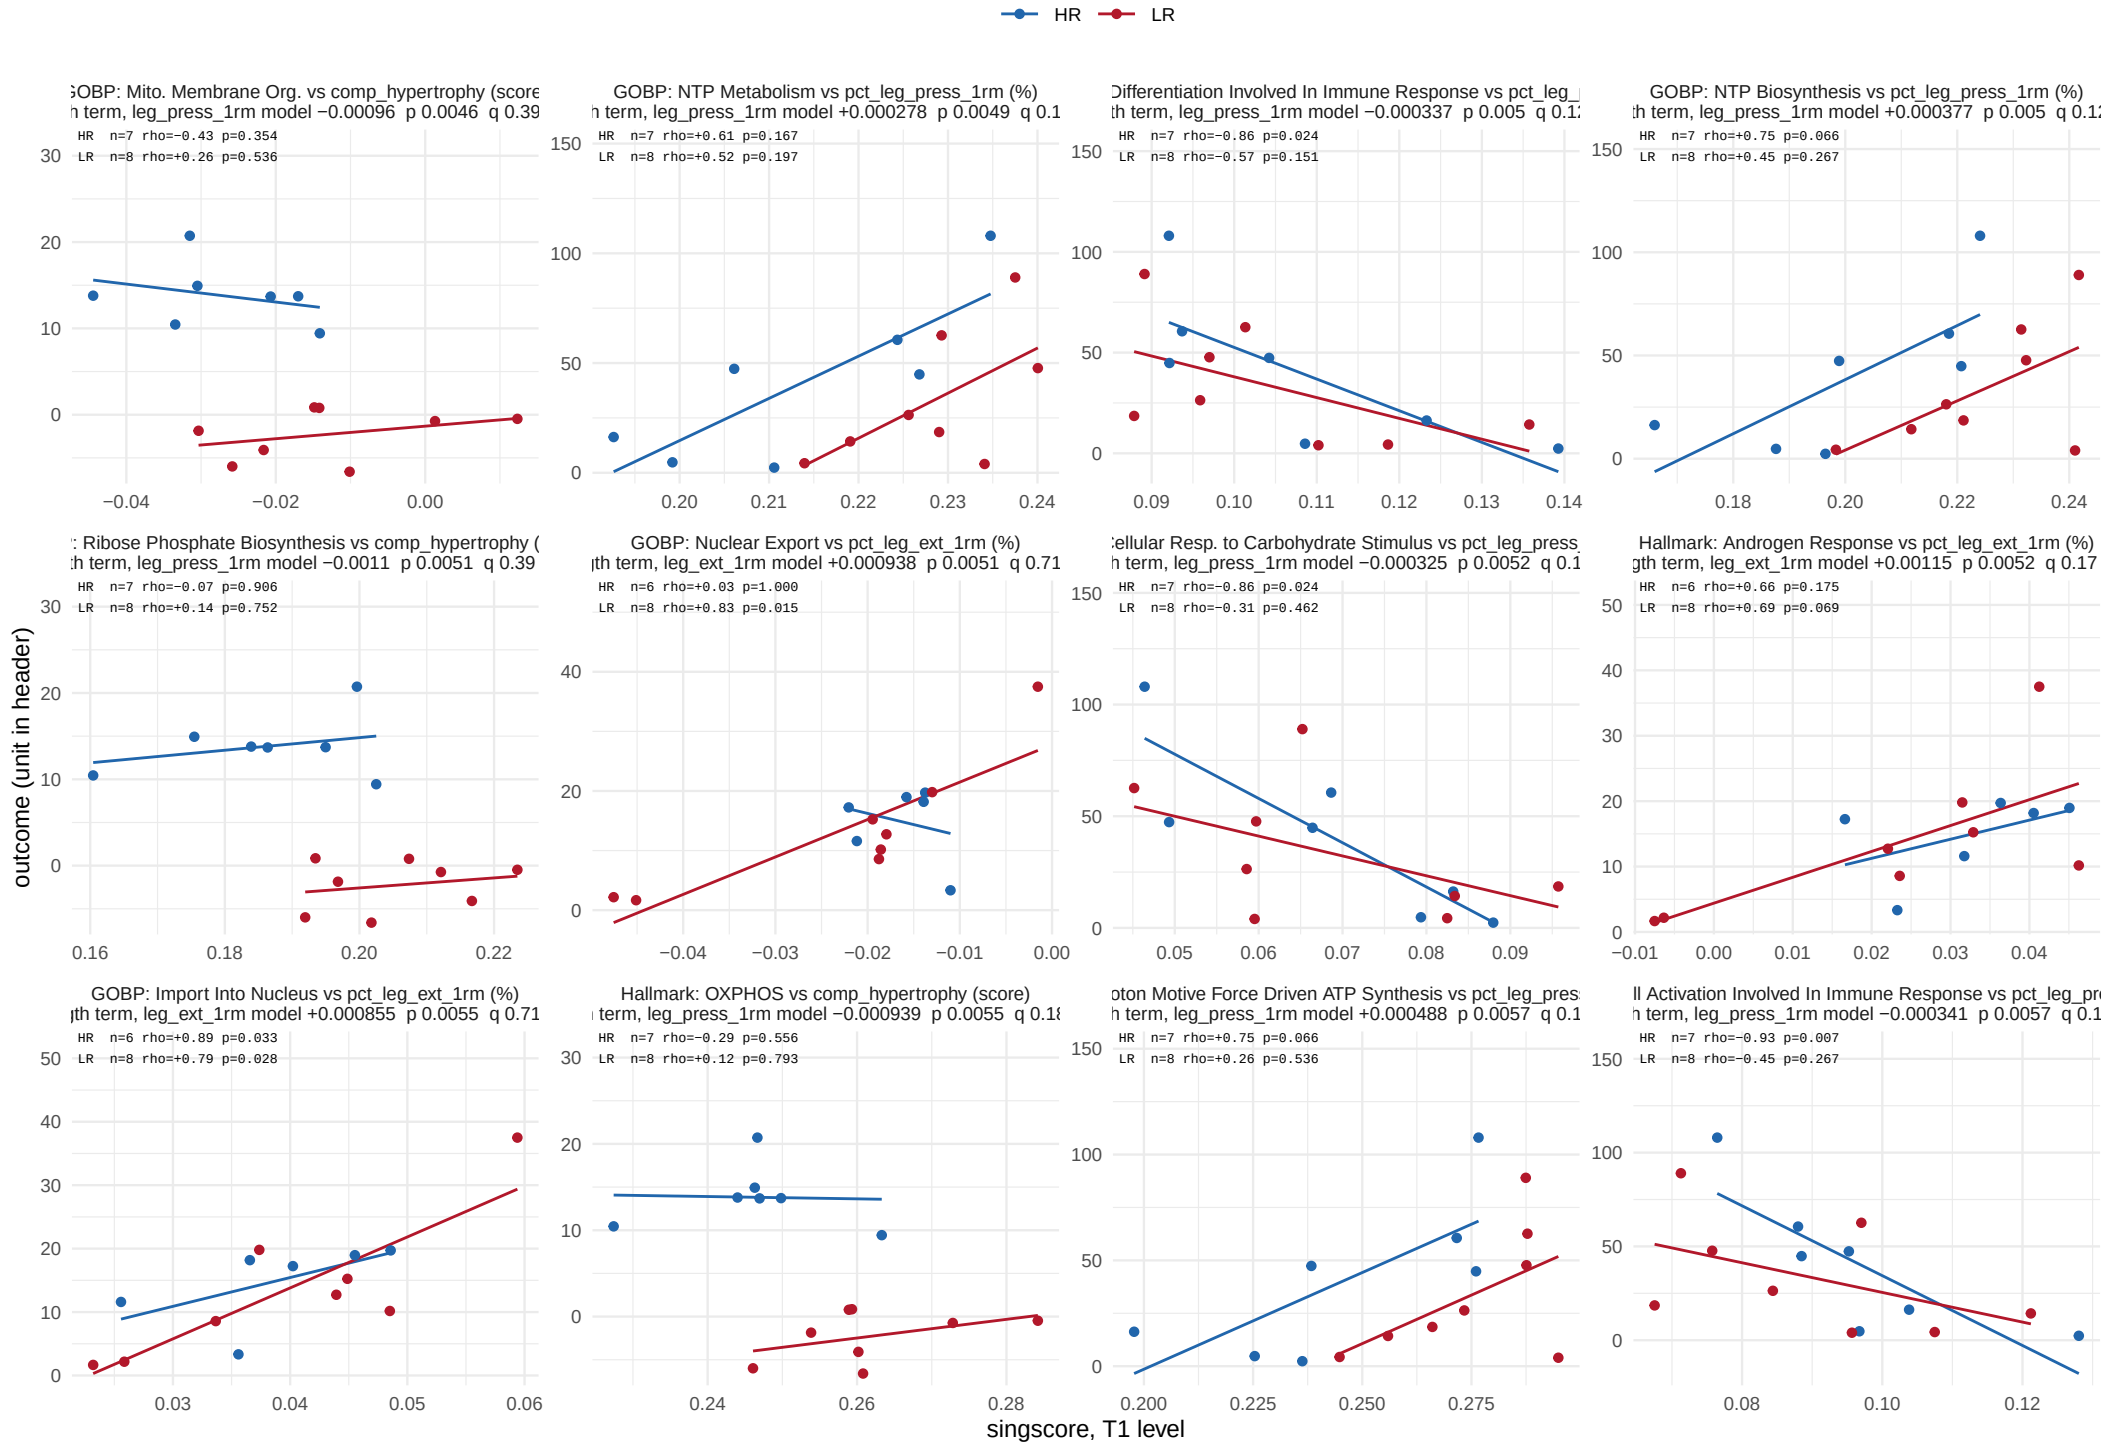


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

## Two predictor, baseline window


410 of 5512 feature−outcome pairs at p < 0.05, 20 at BH < 0.05. Page 8 of 35.

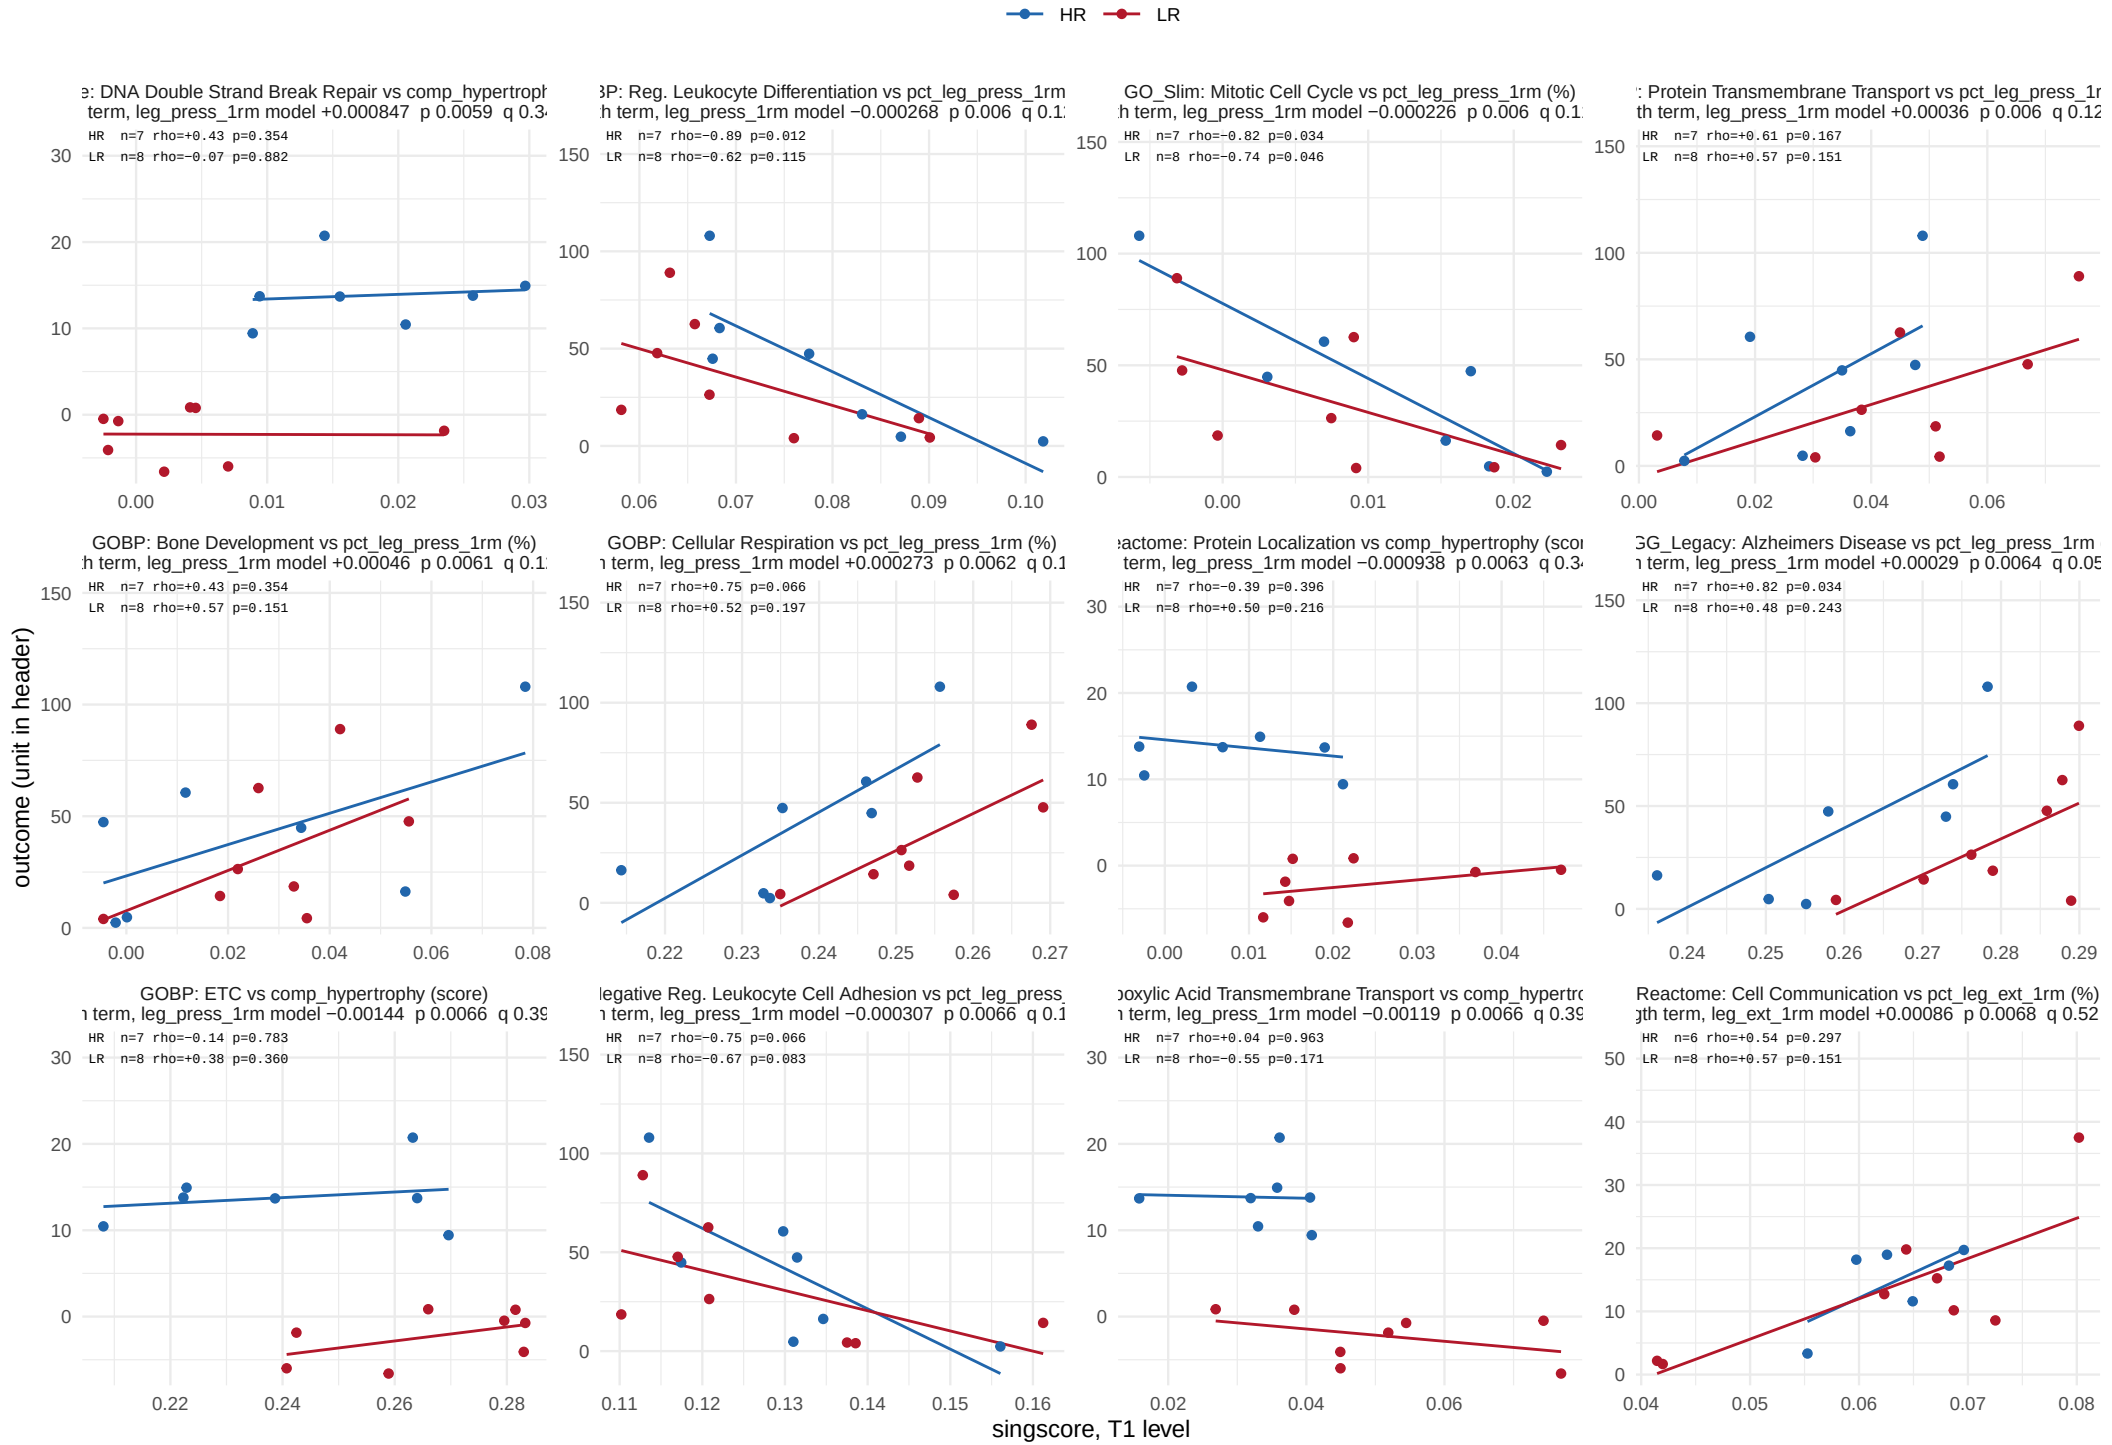


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

## Two predictor, baseline window


410 of 5512 feature−outcome pairs at p < 0.05, 20 at BH < 0.05. Page 9 of 35.

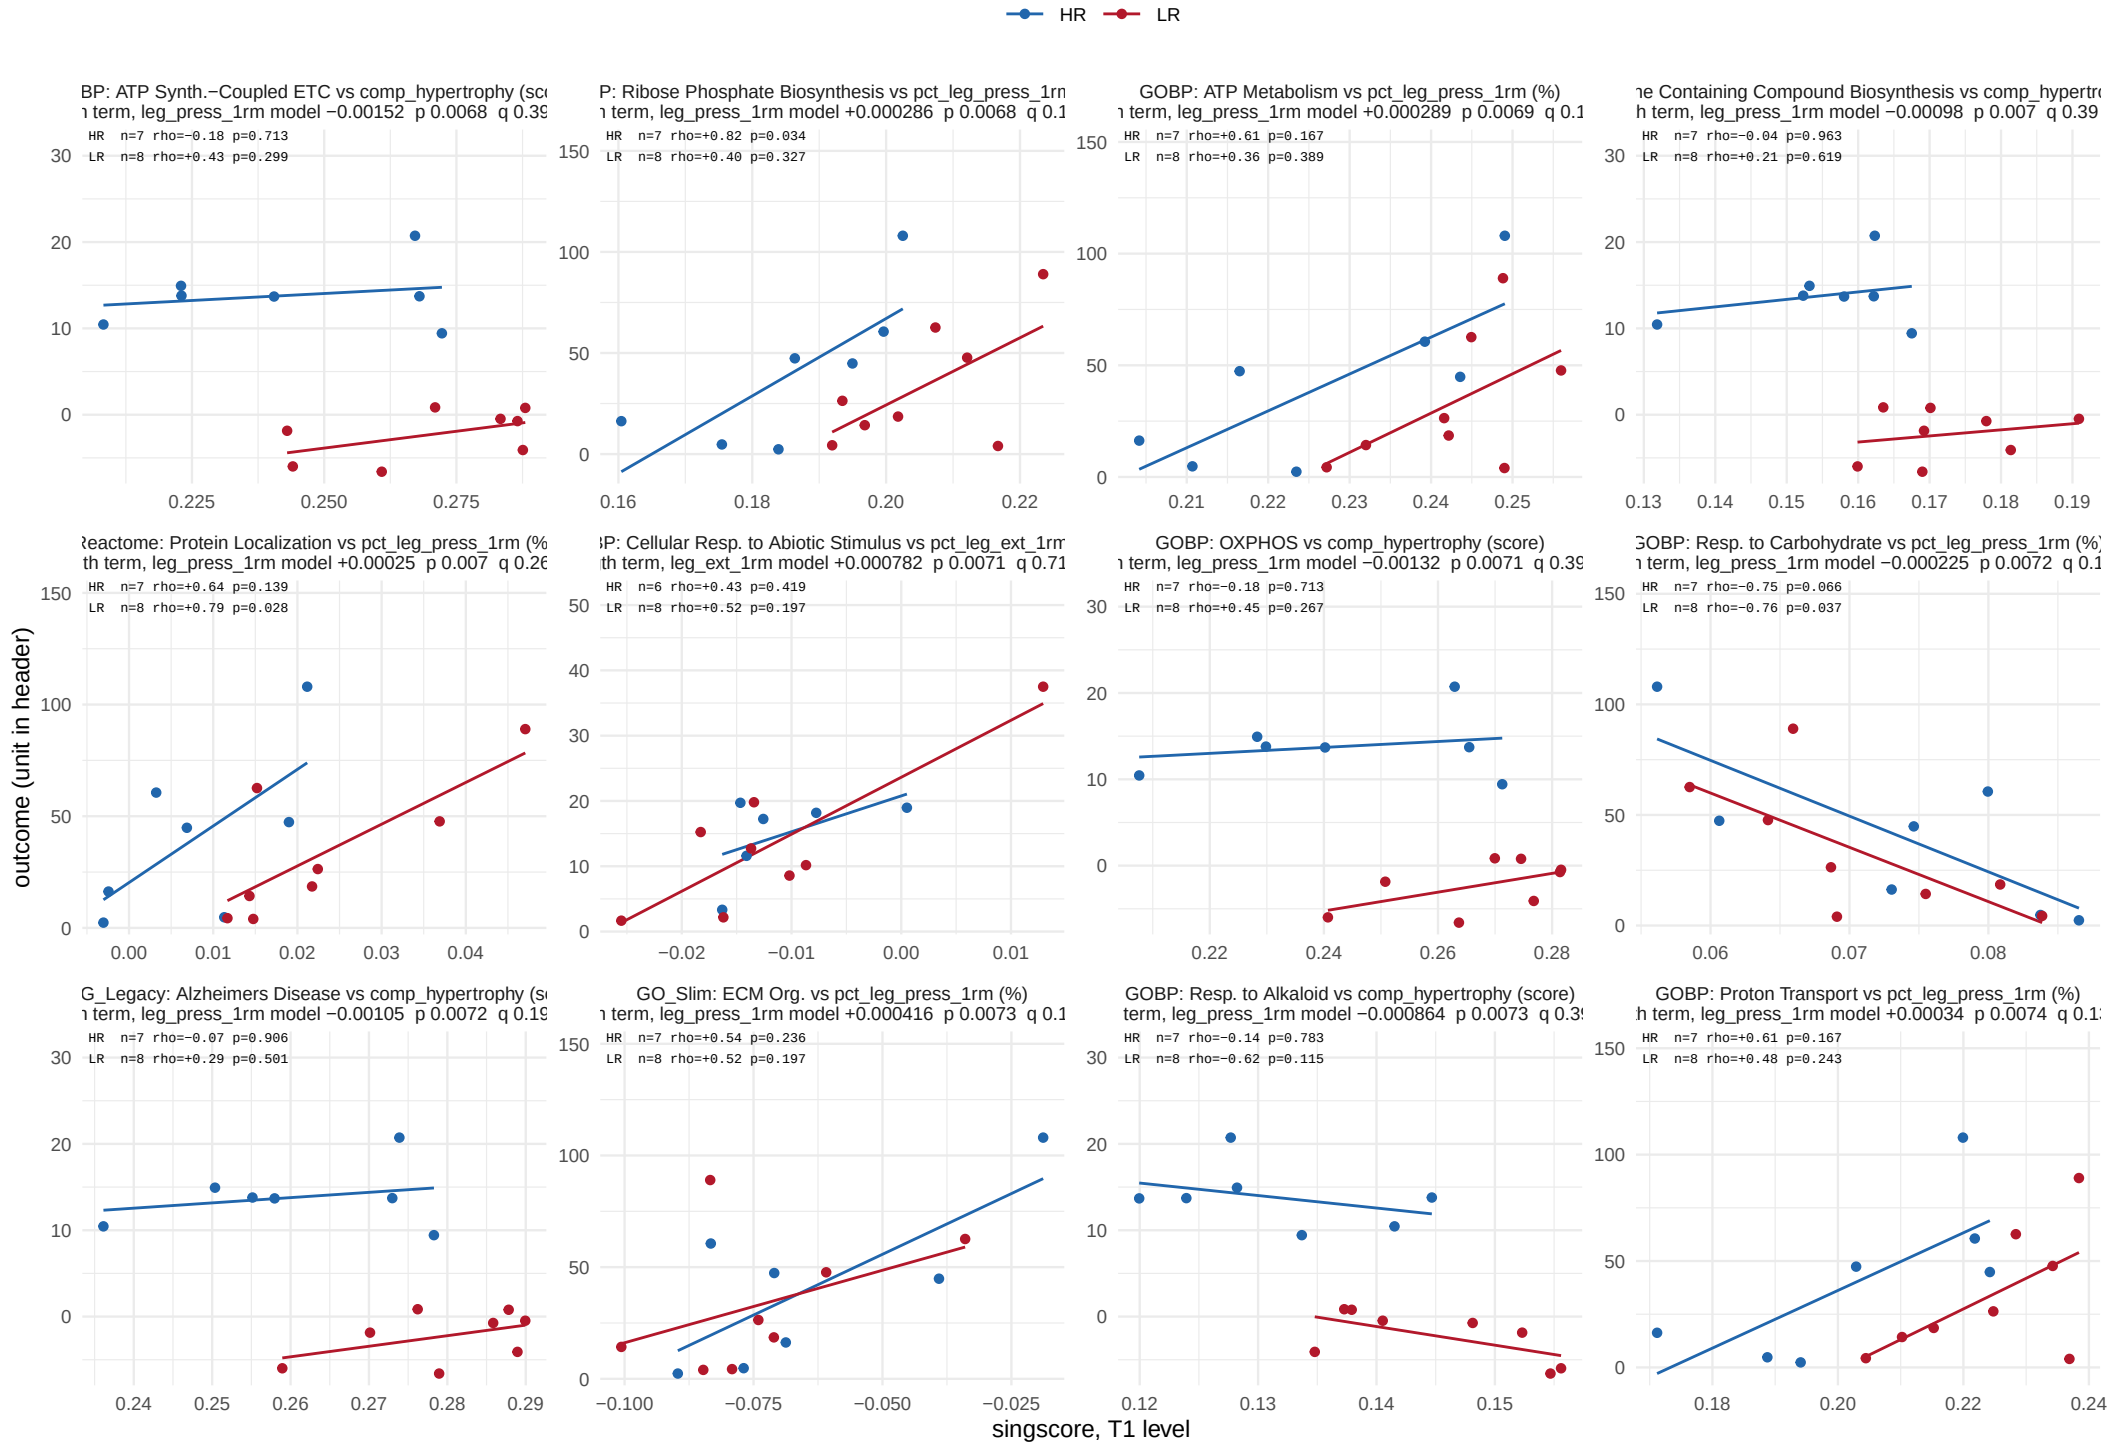


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

## Two predictor, baseline window


410 of 5512 feature−outcome pairs at p < 0.05, 20 at BH < 0.05. Page 10 of 35.

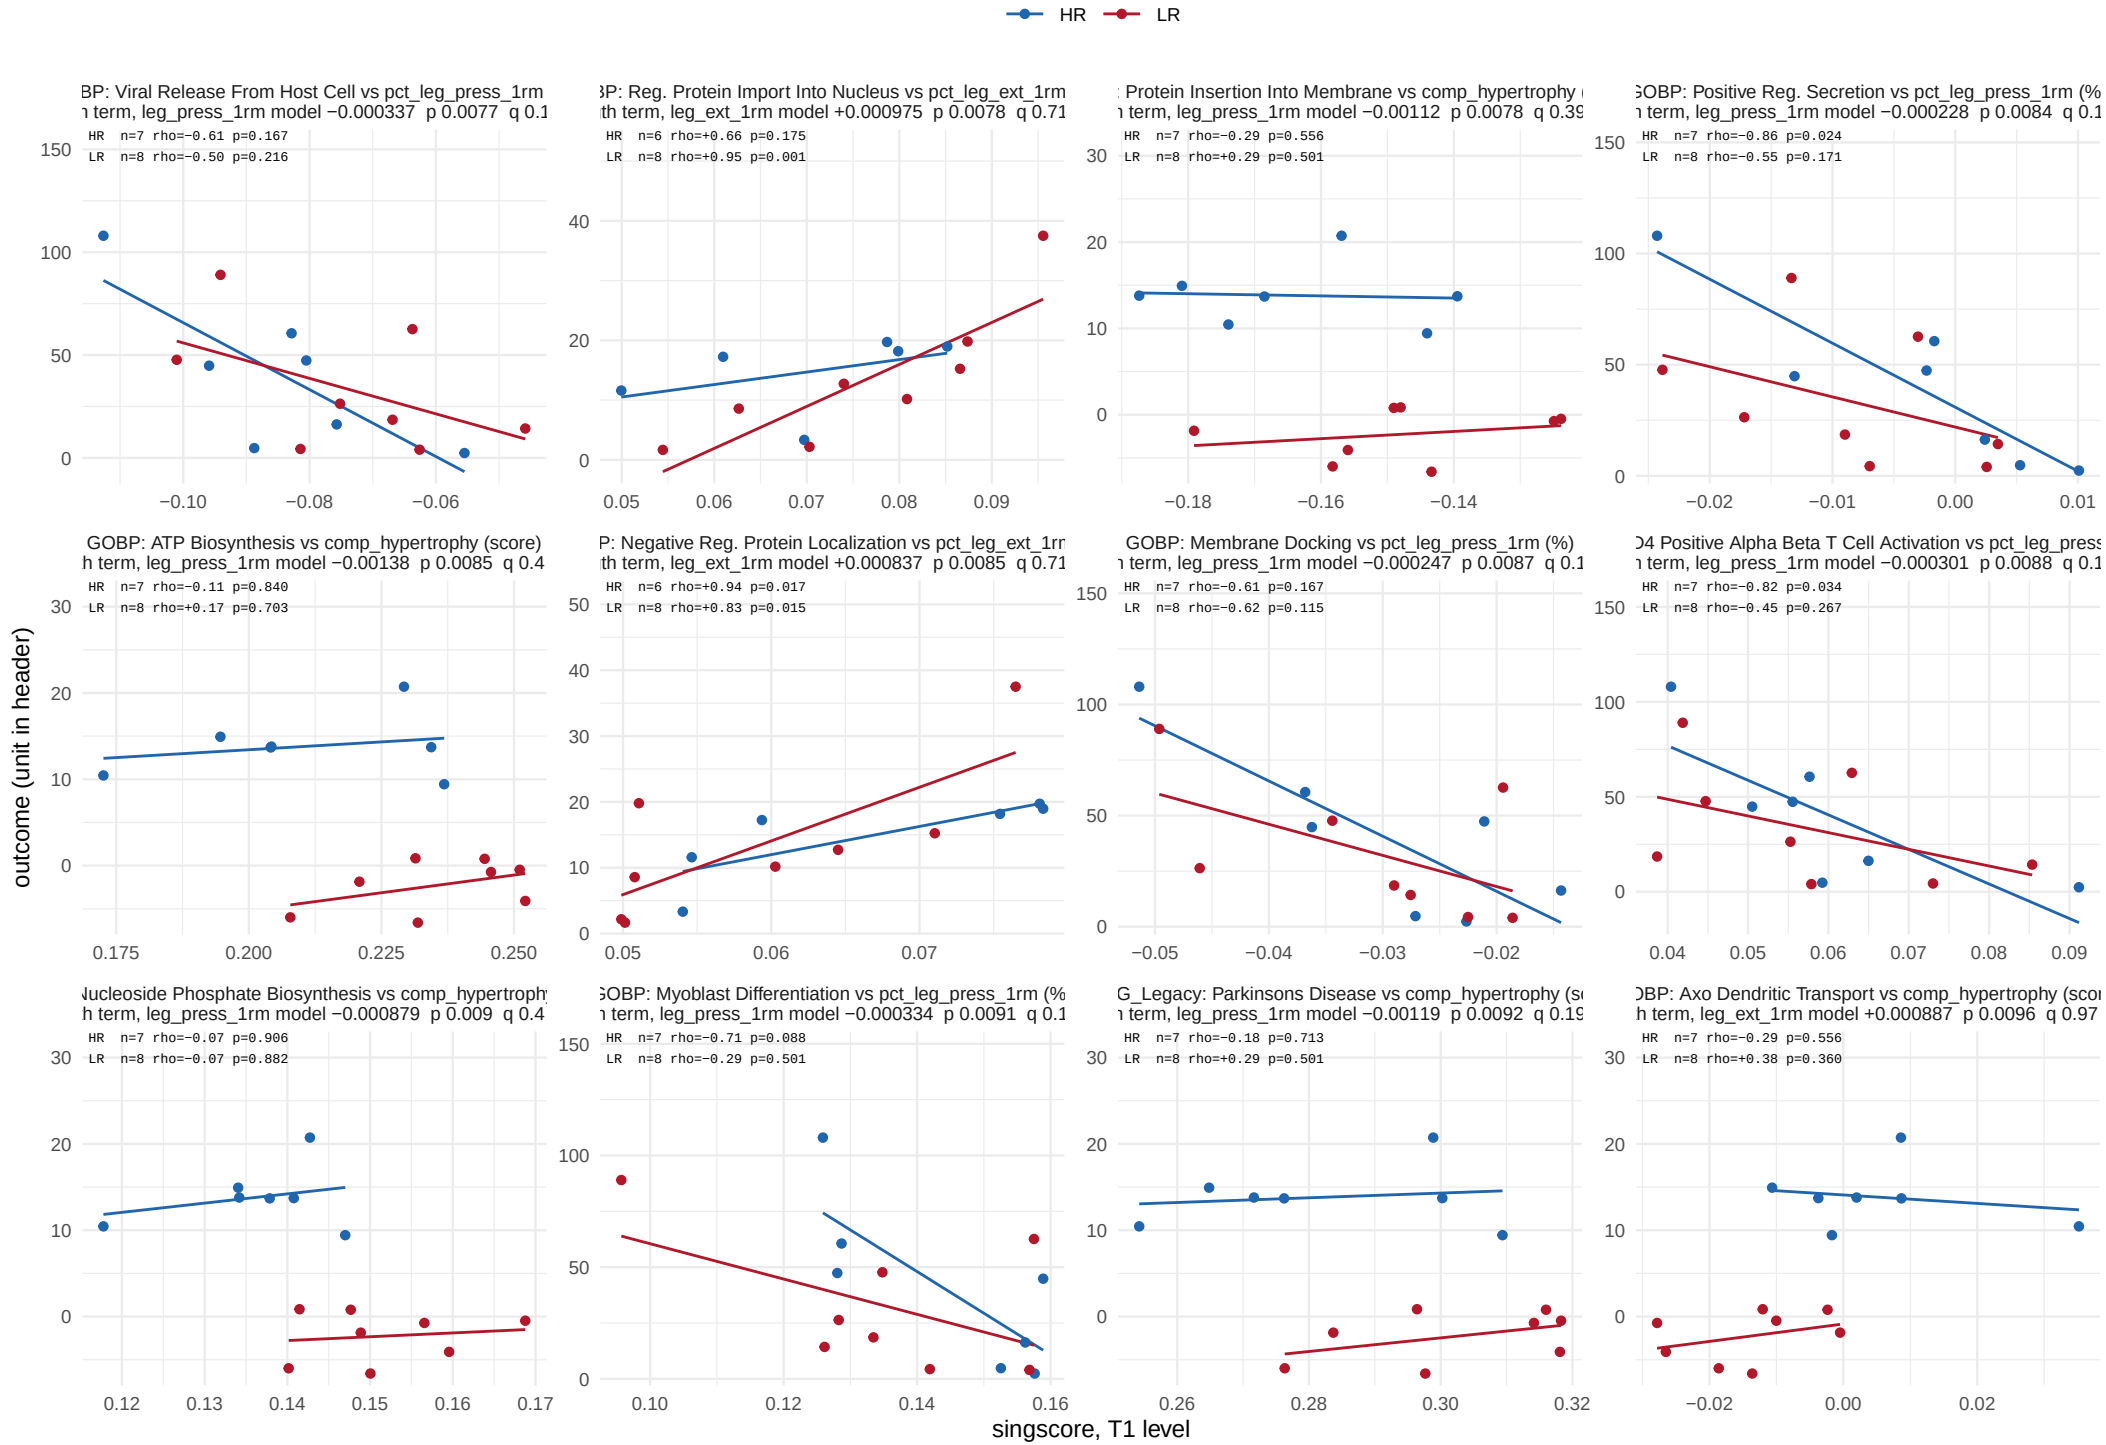


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

## Two predictor, baseline window


410 of 5512 feature−outcome pairs at p < 0.05, 20 at BH < 0.05. Page 11 of 35.

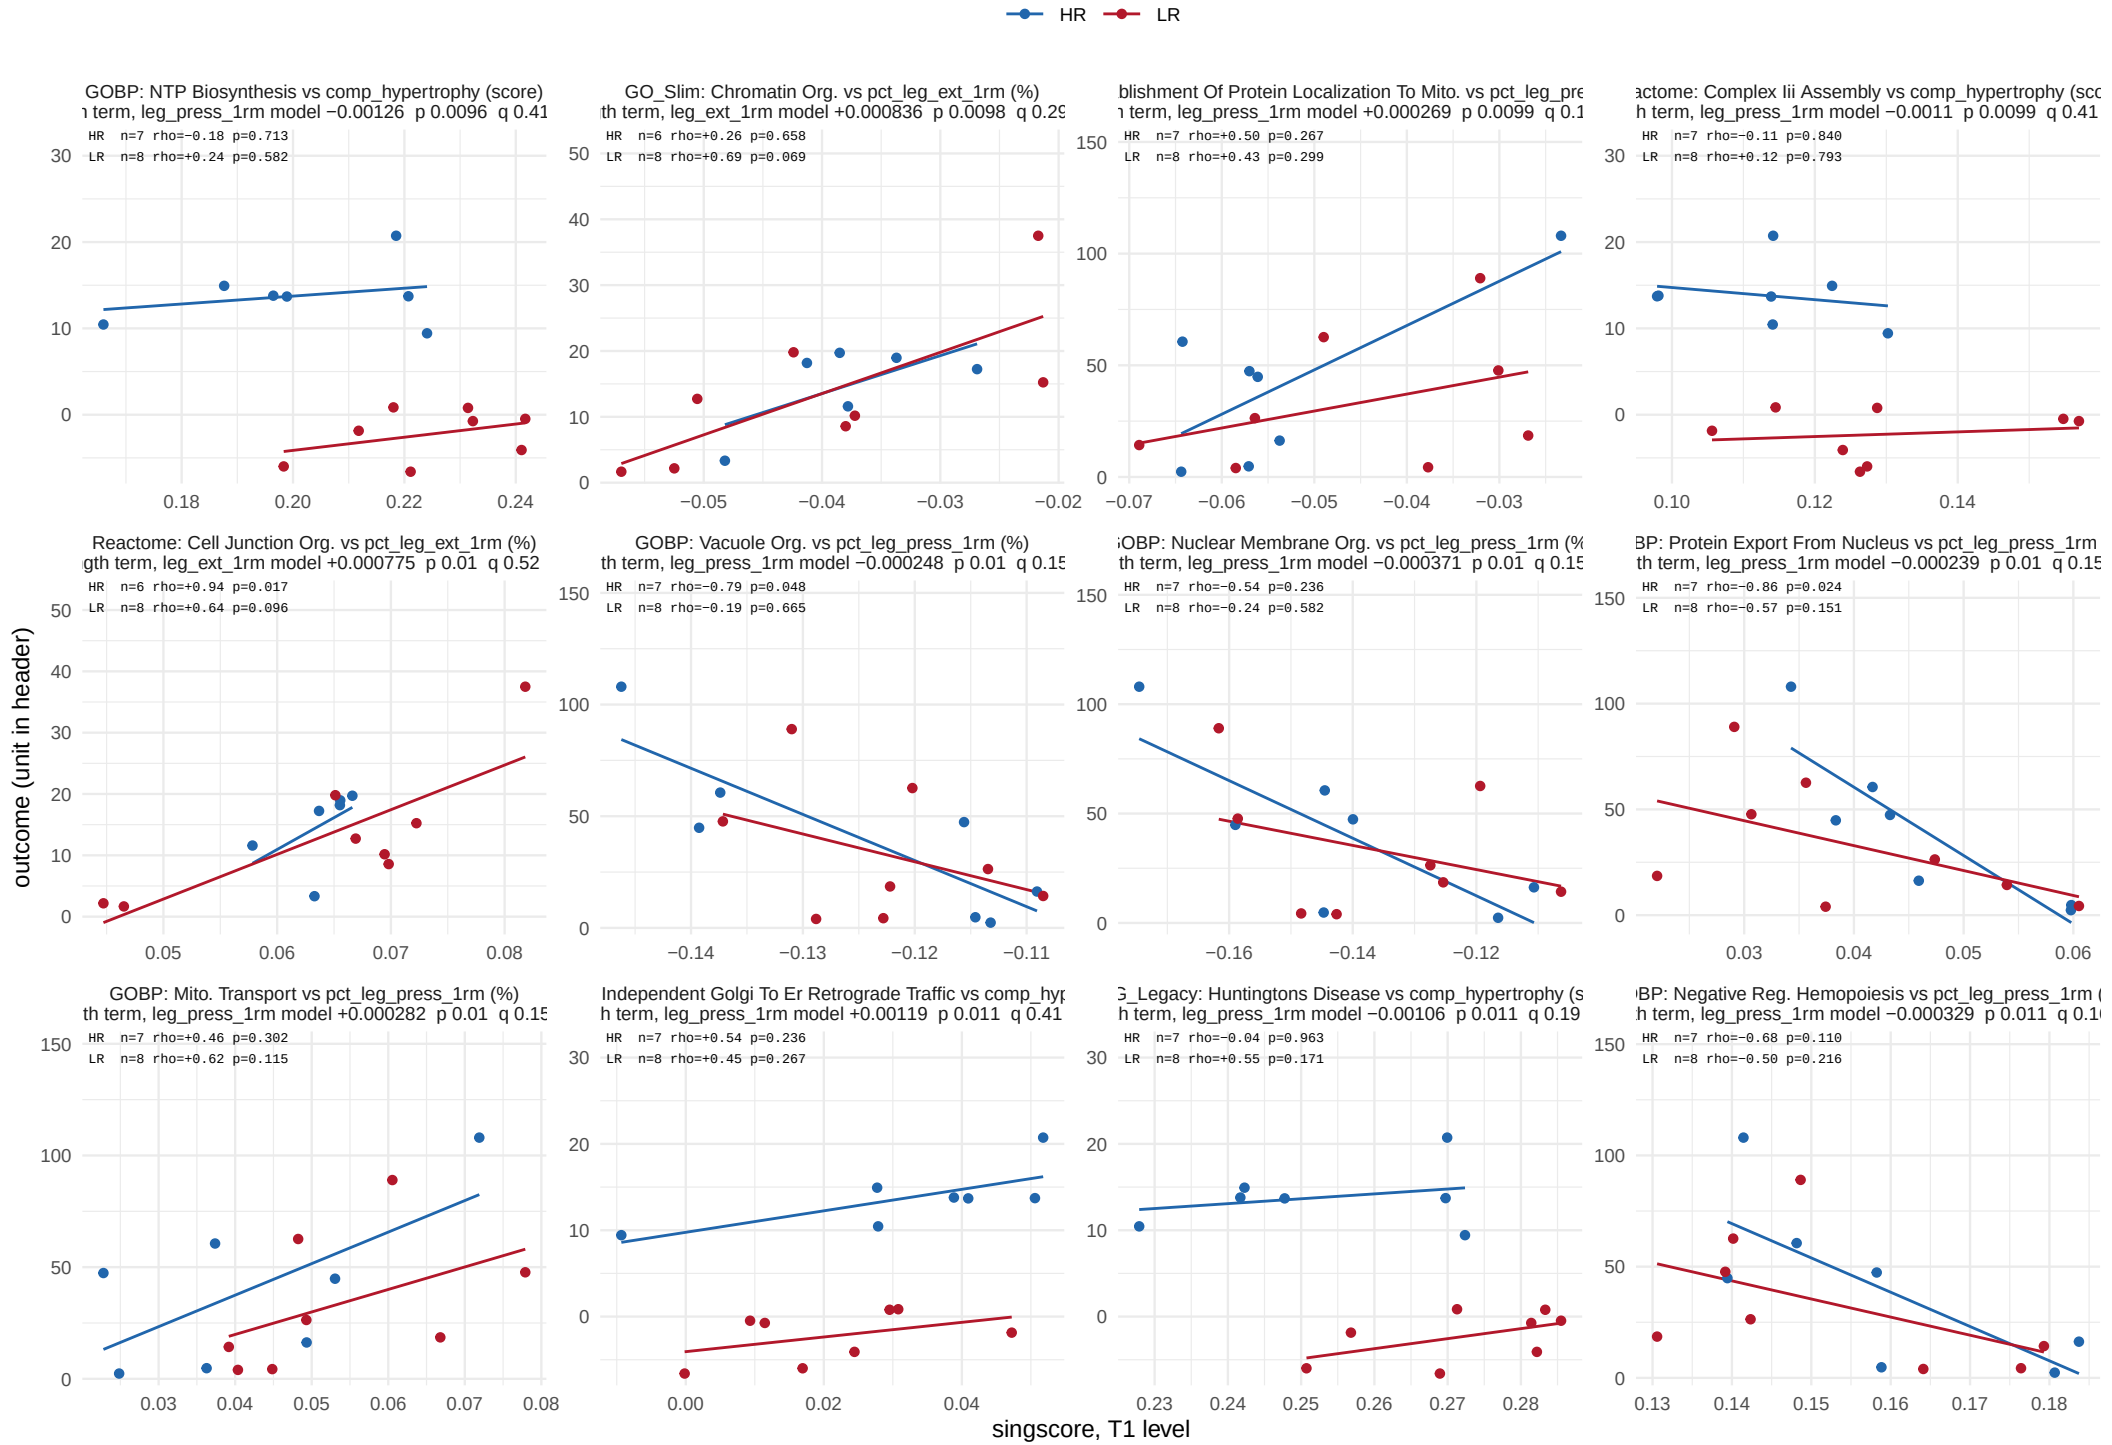


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

## Two predictor, baseline window


410 of 5512 feature−outcome pairs at p < 0.05, 20 at BH < 0.05. Page 12 of 35.

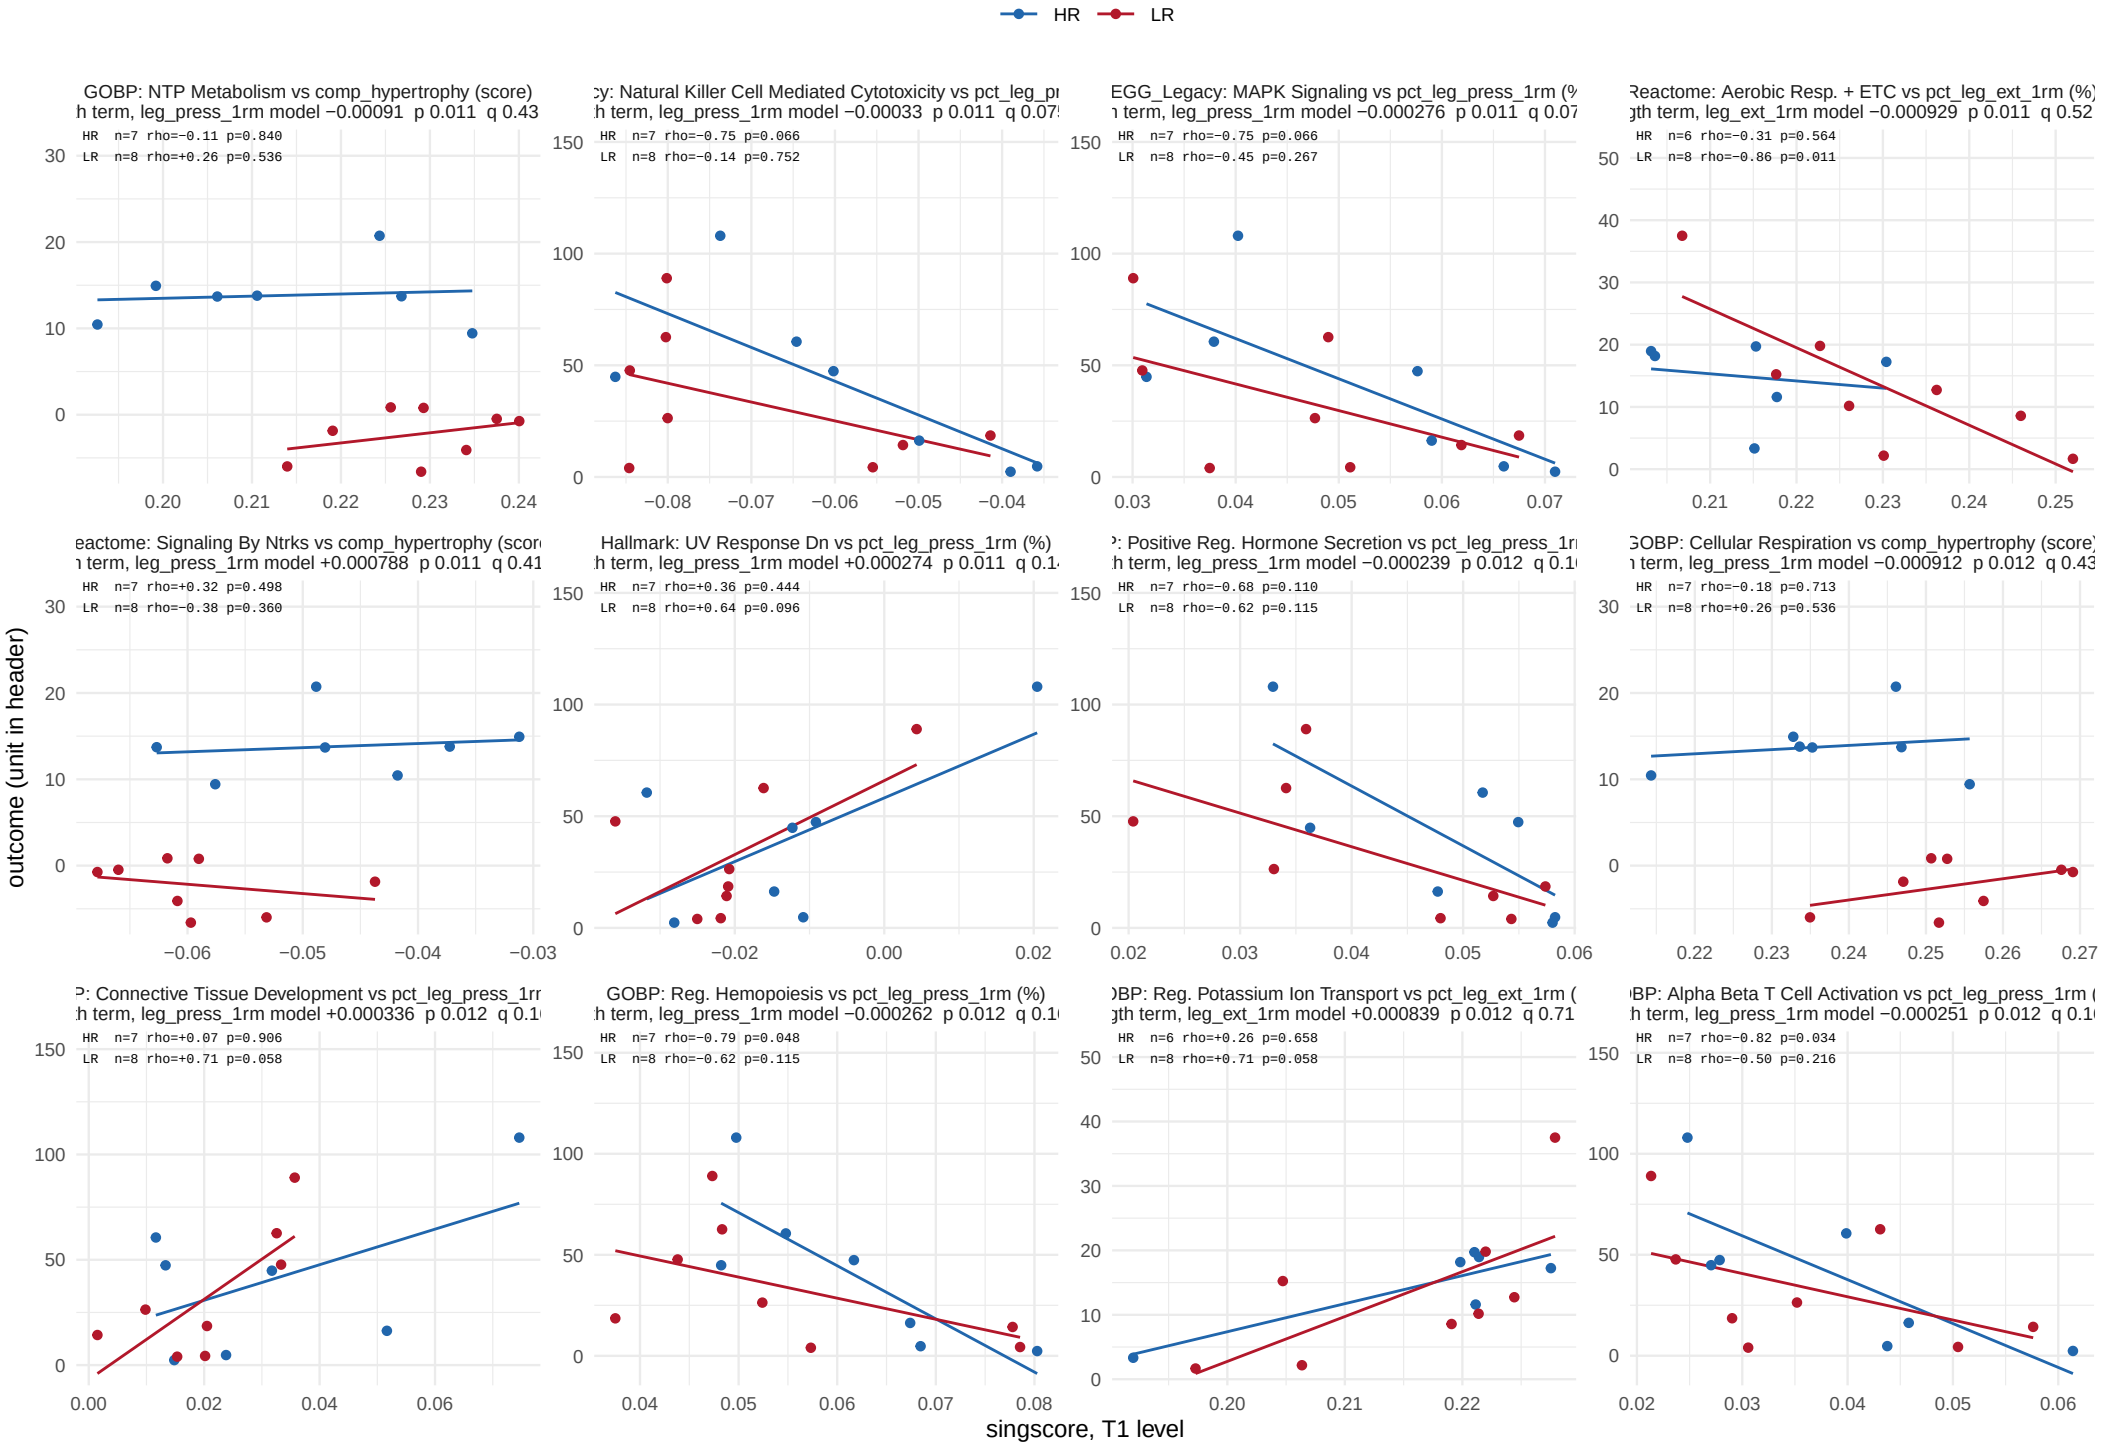


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

## Two predictor, baseline window


410 of 5512 feature−outcome pairs at p < 0.05, 20 at BH < 0.05. Page 13 of 35.

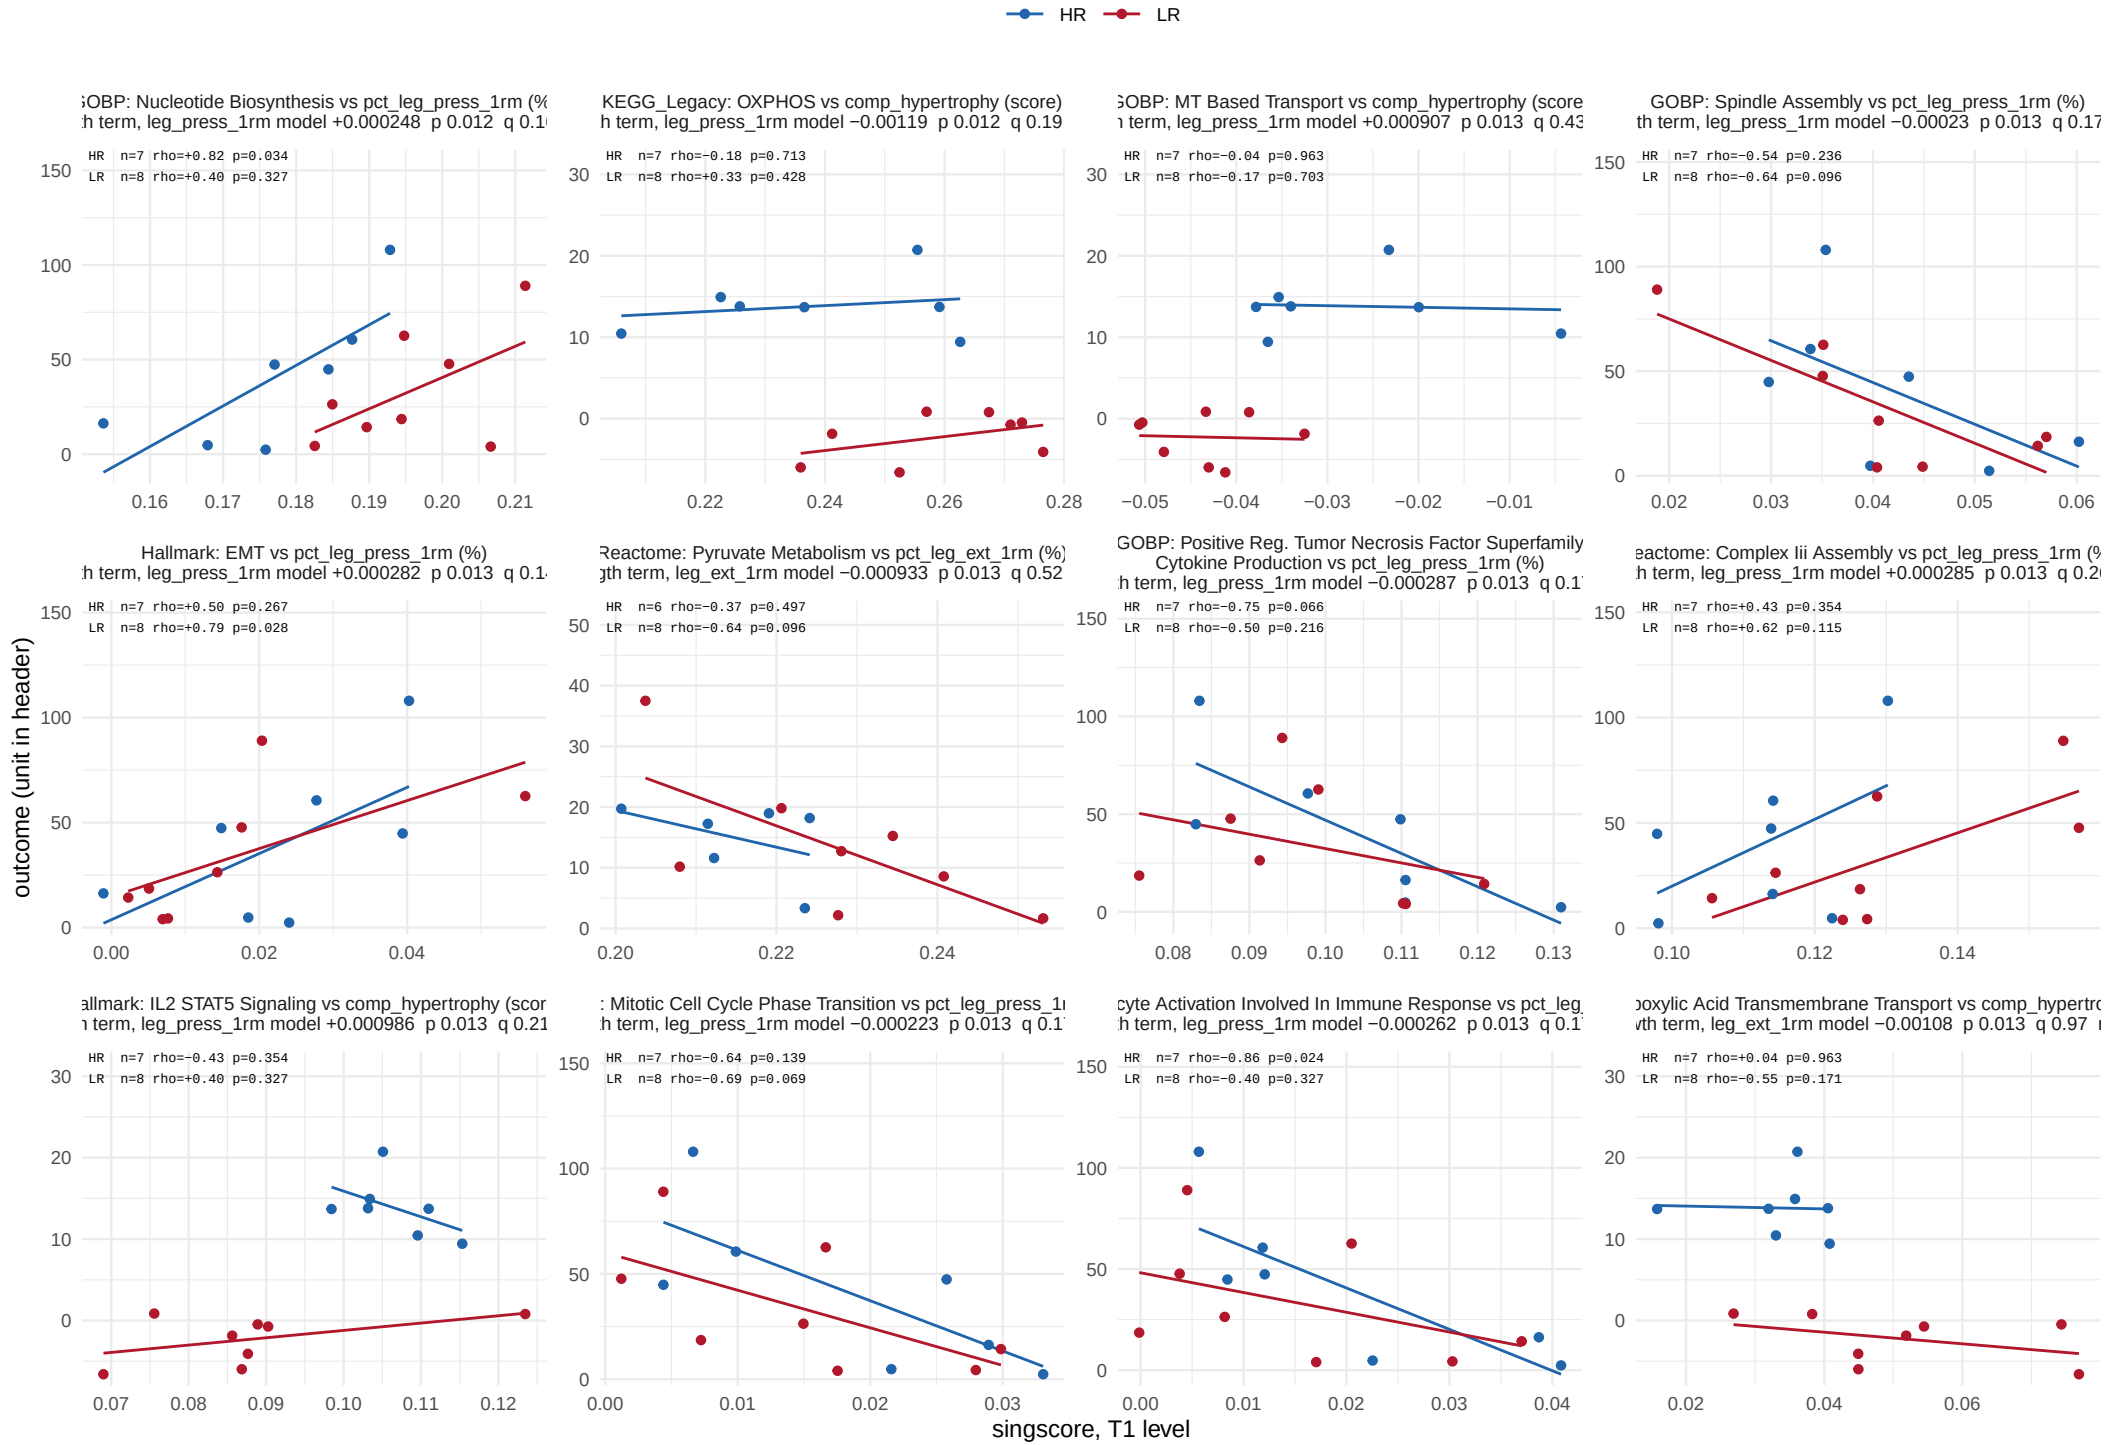


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

## Two predictor, baseline window


410 of 5512 feature−outcome pairs at p < 0.05, 20 at BH < 0.05. Page 14 of 35.

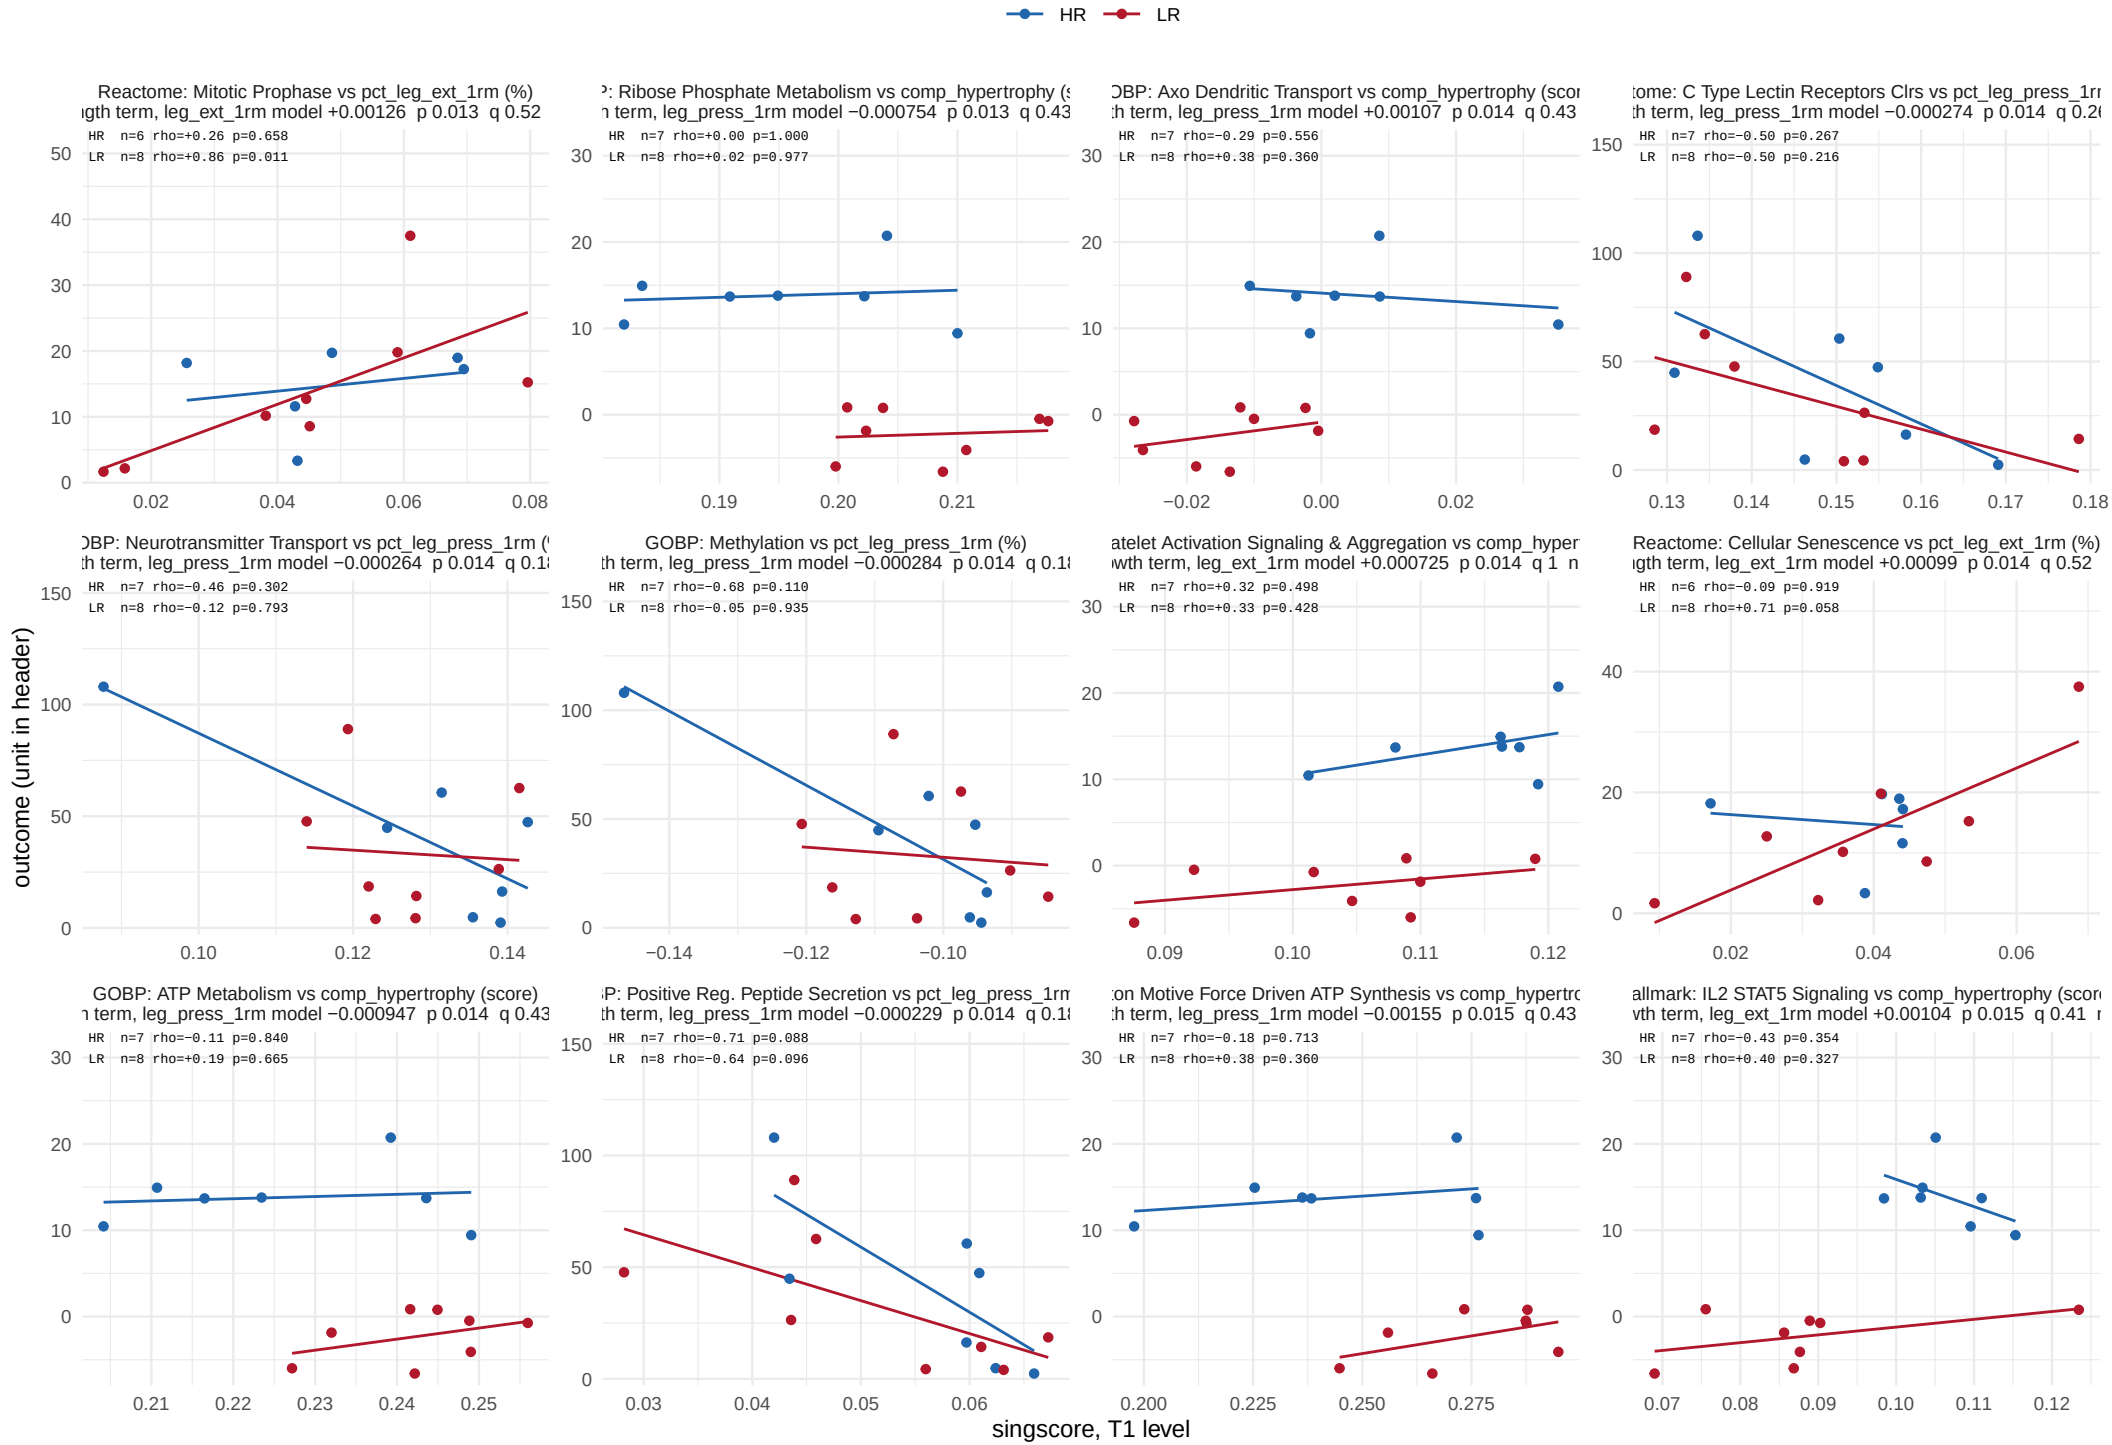


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

## Two predictor, baseline window


410 of 5512 feature−outcome pairs at p < 0.05, 20 at BH < 0.05. Page 15 of 35.

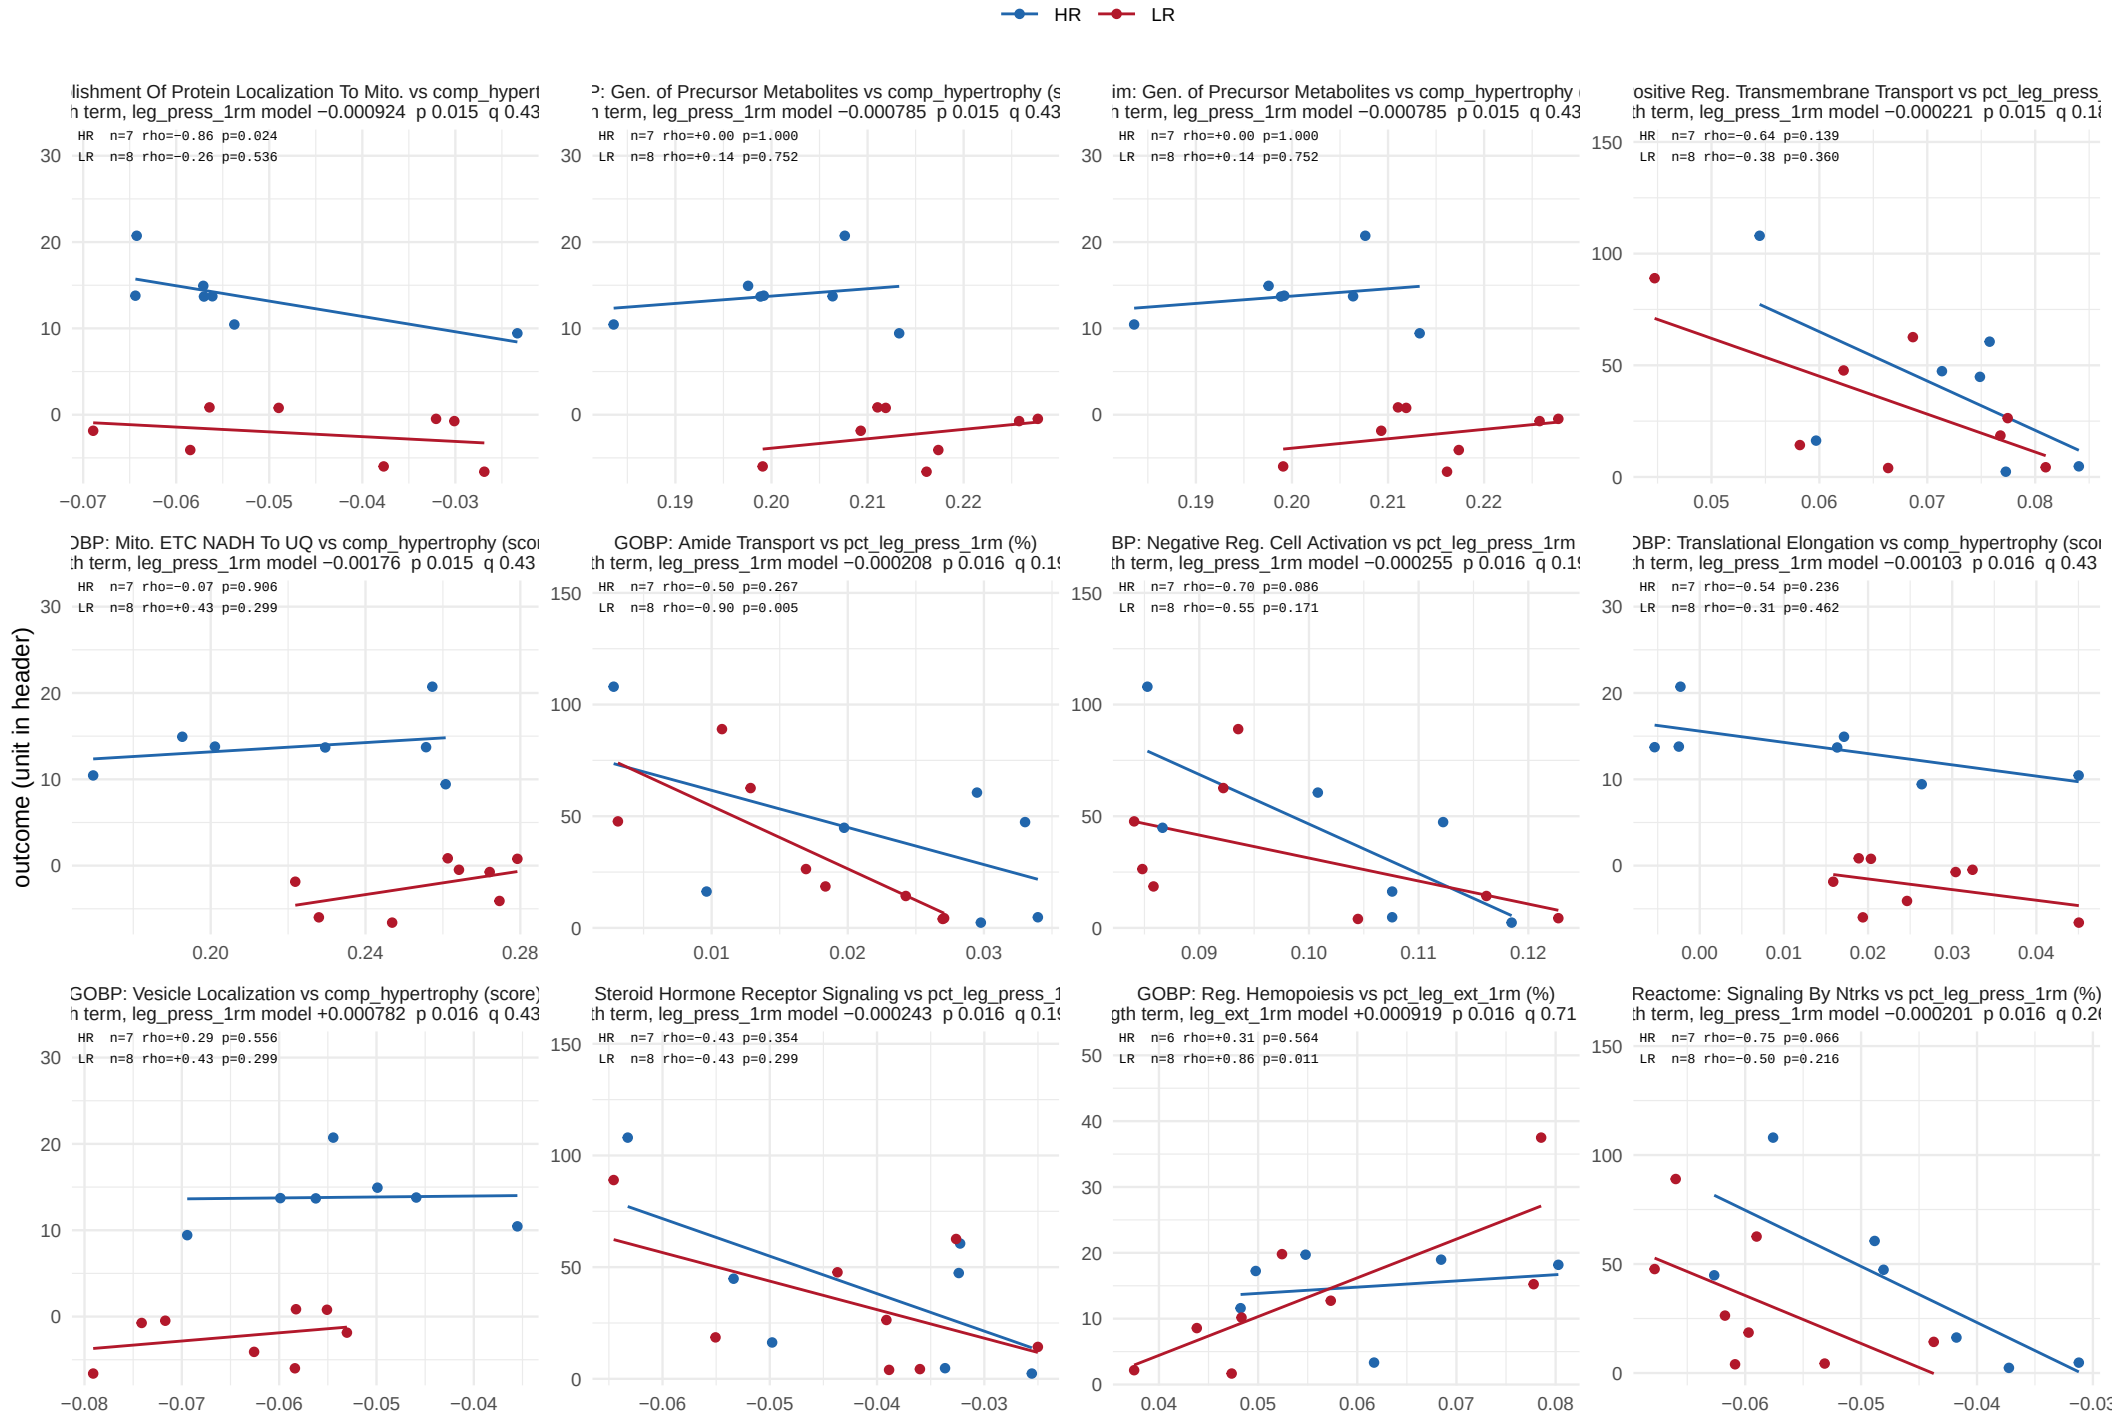


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

## Two predictor, baseline window


410 of 5512 feature−outcome pairs at p < 0.05, 20 at BH < 0.05. Page 16 of 35.

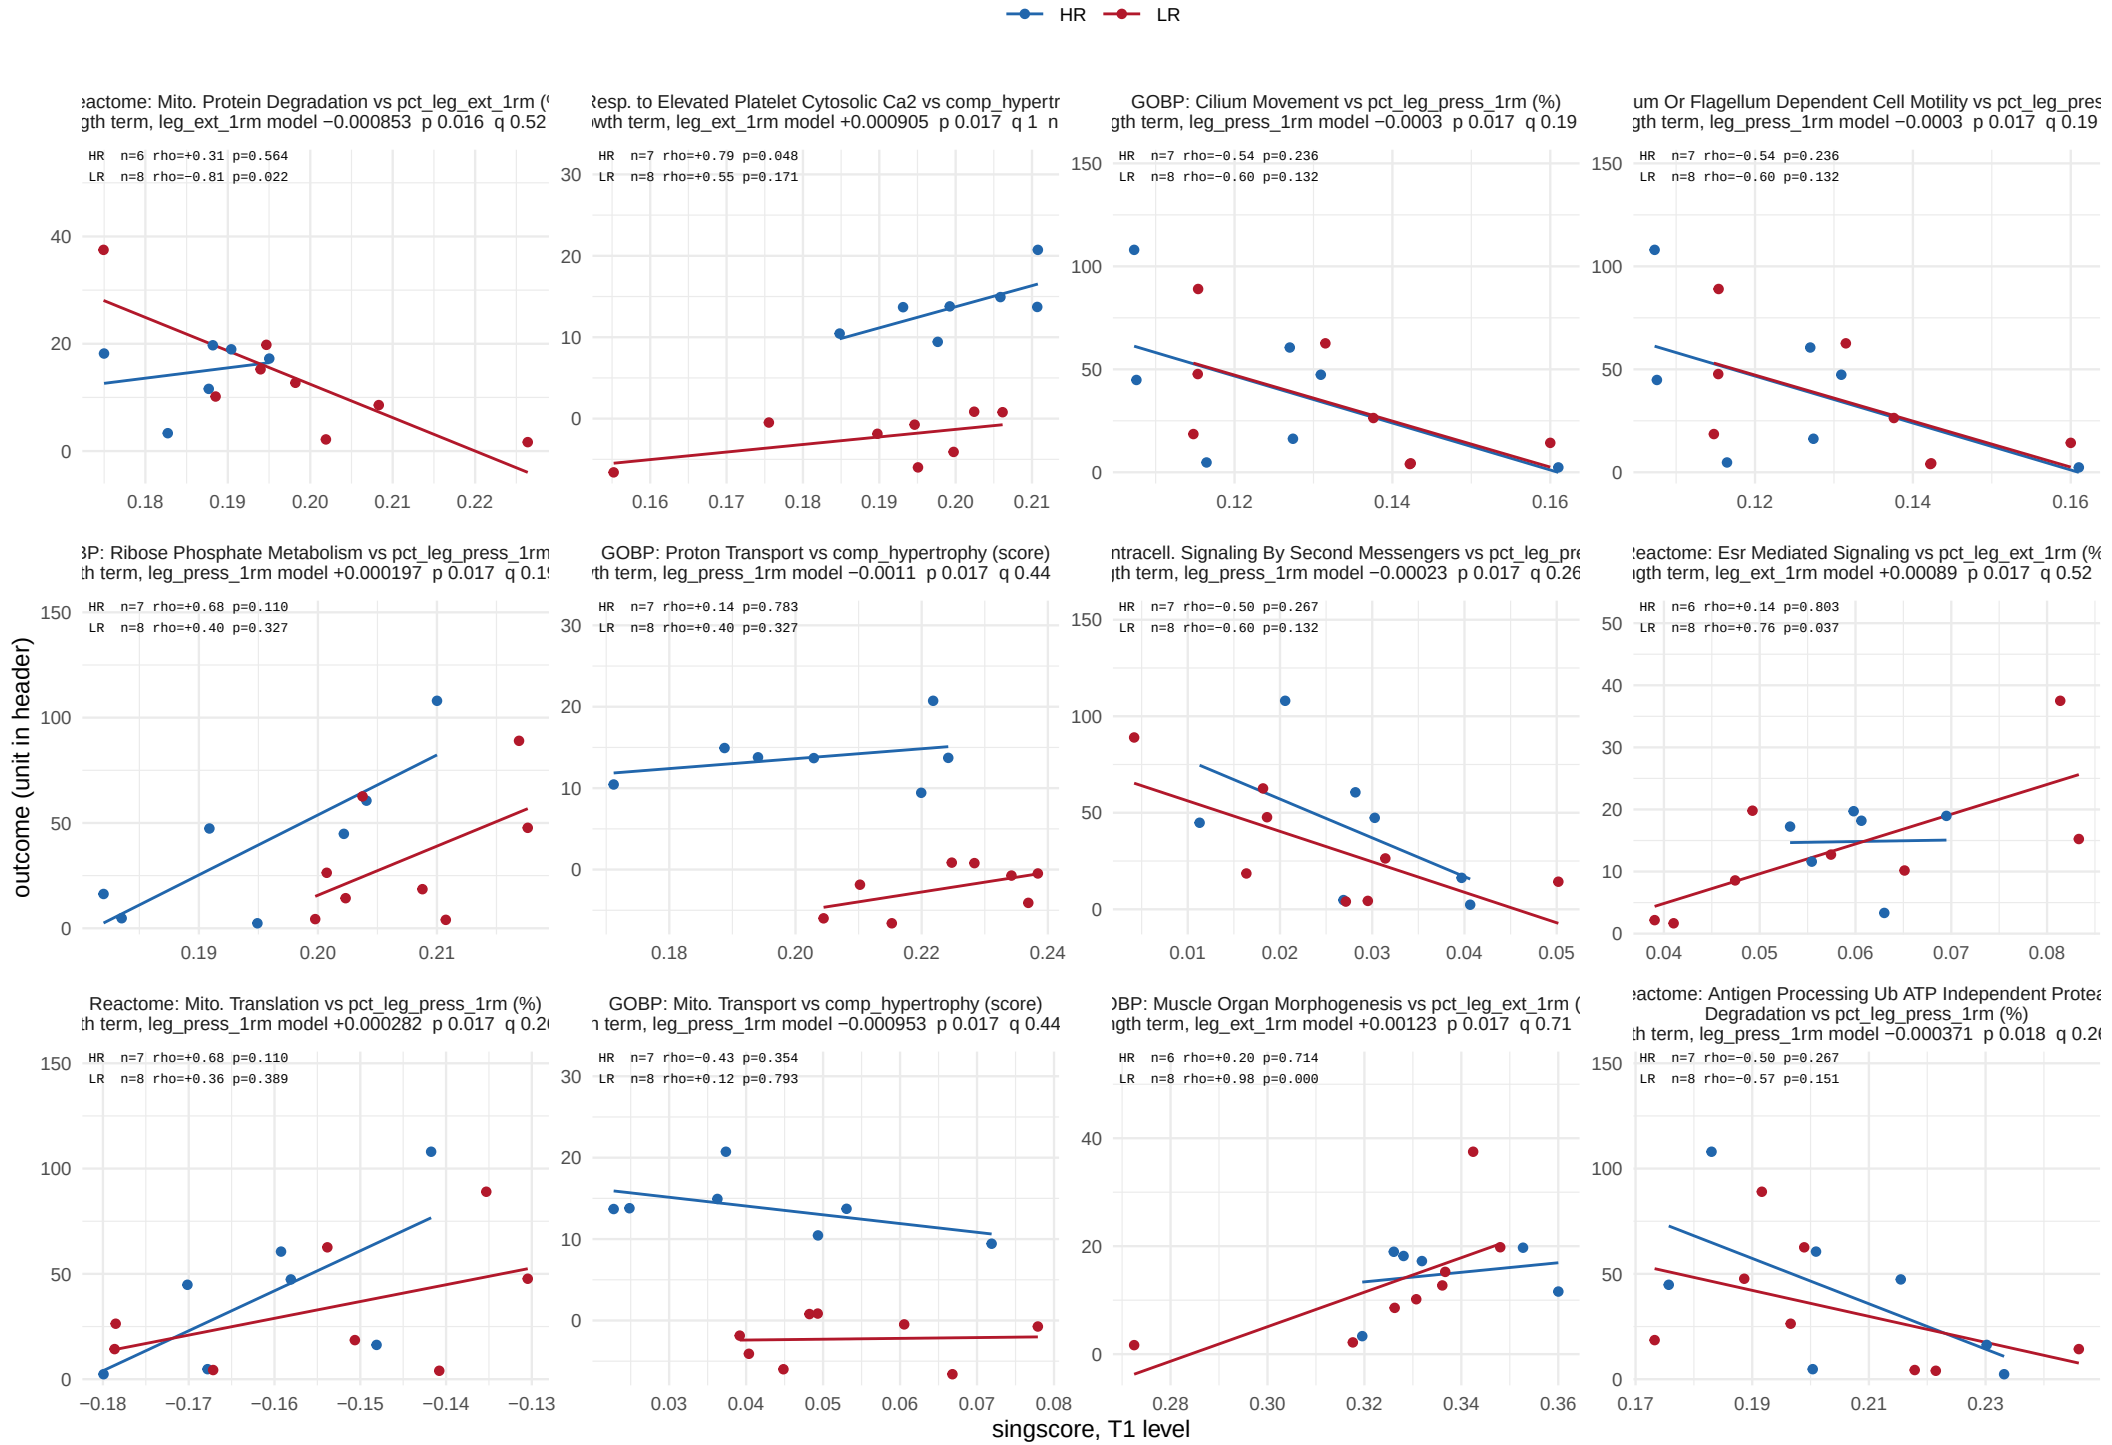


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

## Two predictor, baseline window


410 of 5512 feature−outcome pairs at p < 0.05, 20 at BH < 0.05. Page 17 of 35.

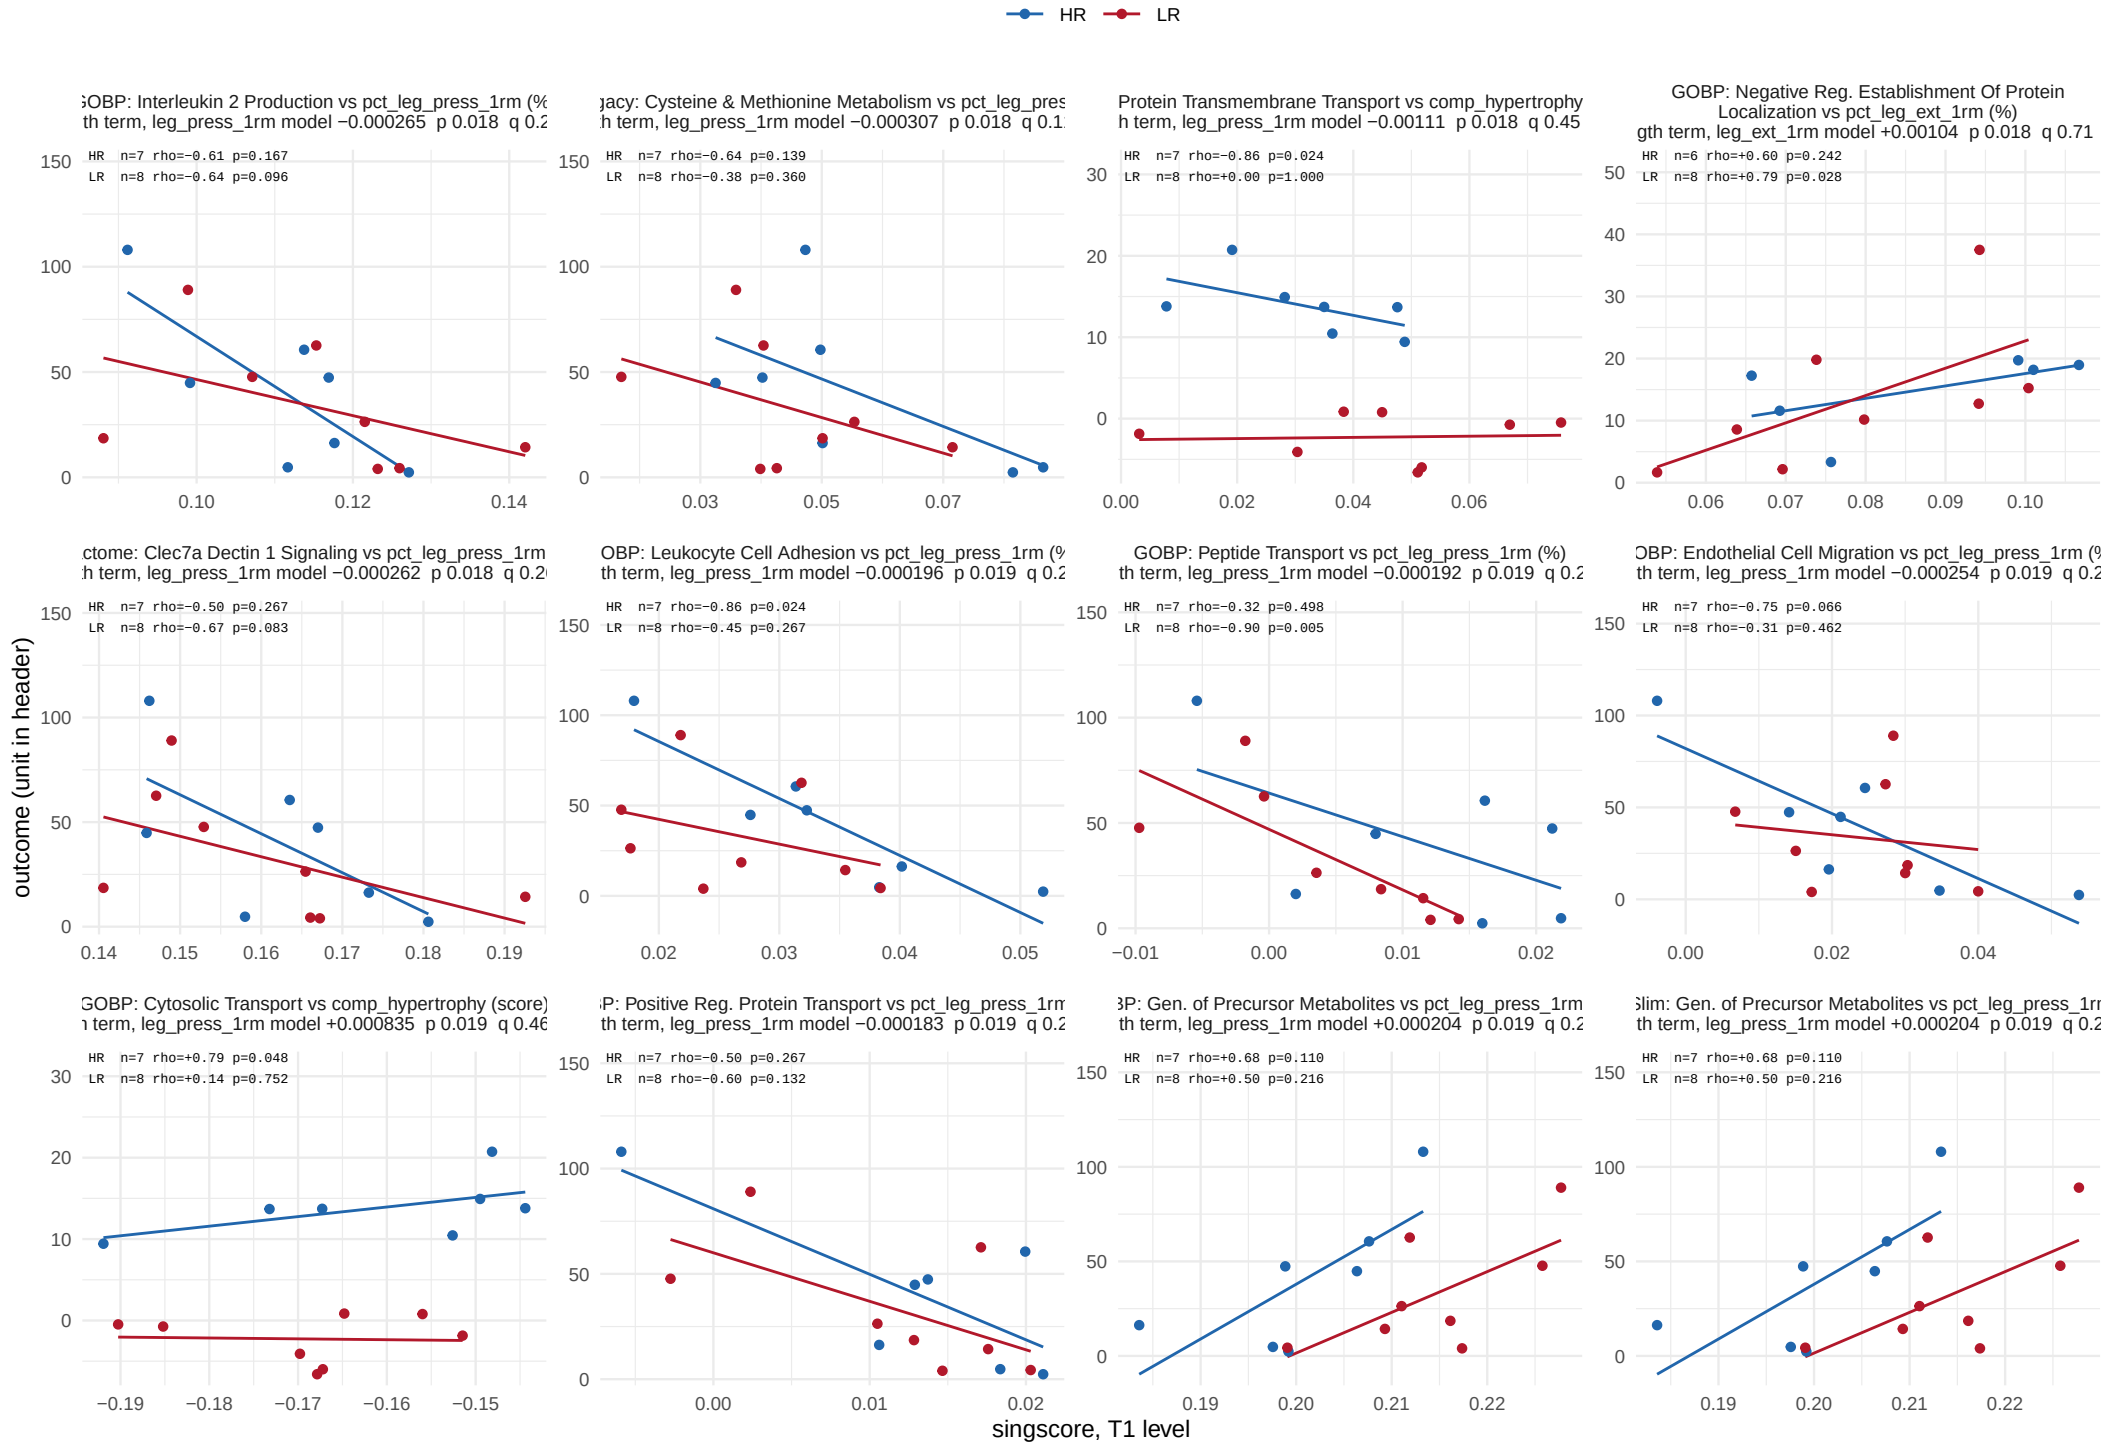


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

## Two predictor, baseline window


410 of 5512 feature−outcome pairs at p < 0.05, 20 at BH < 0.05. Page 18 of 35.

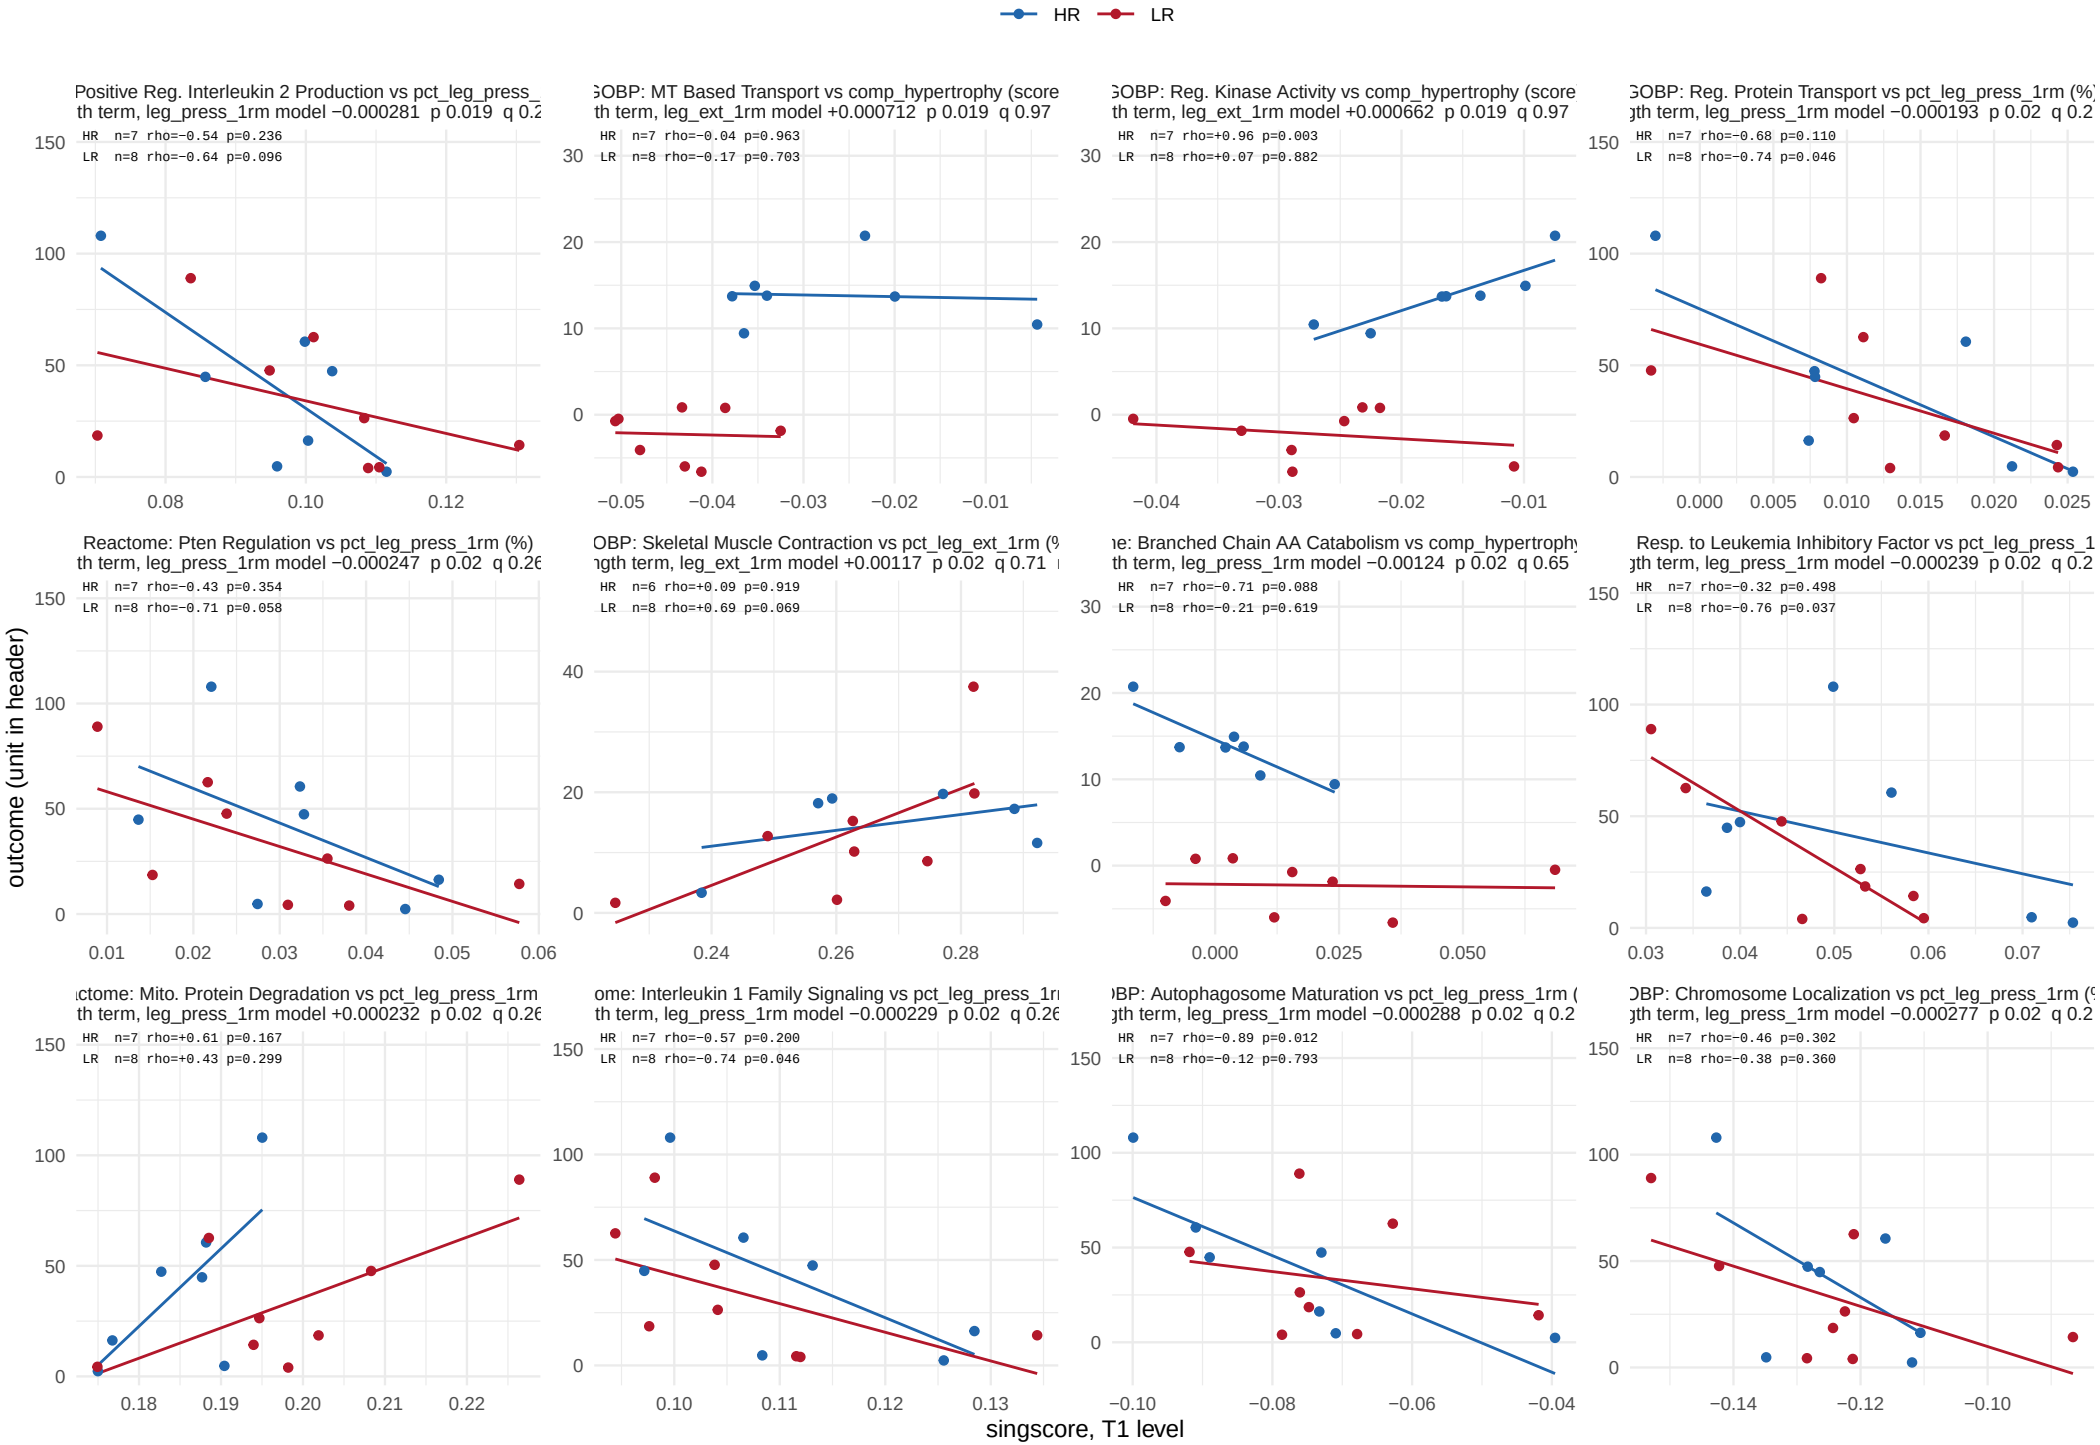


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

## Two predictor, baseline window


410 of 5512 feature−outcome pairs at p < 0.05, 20 at BH < 0.05. Page 19 of 35.

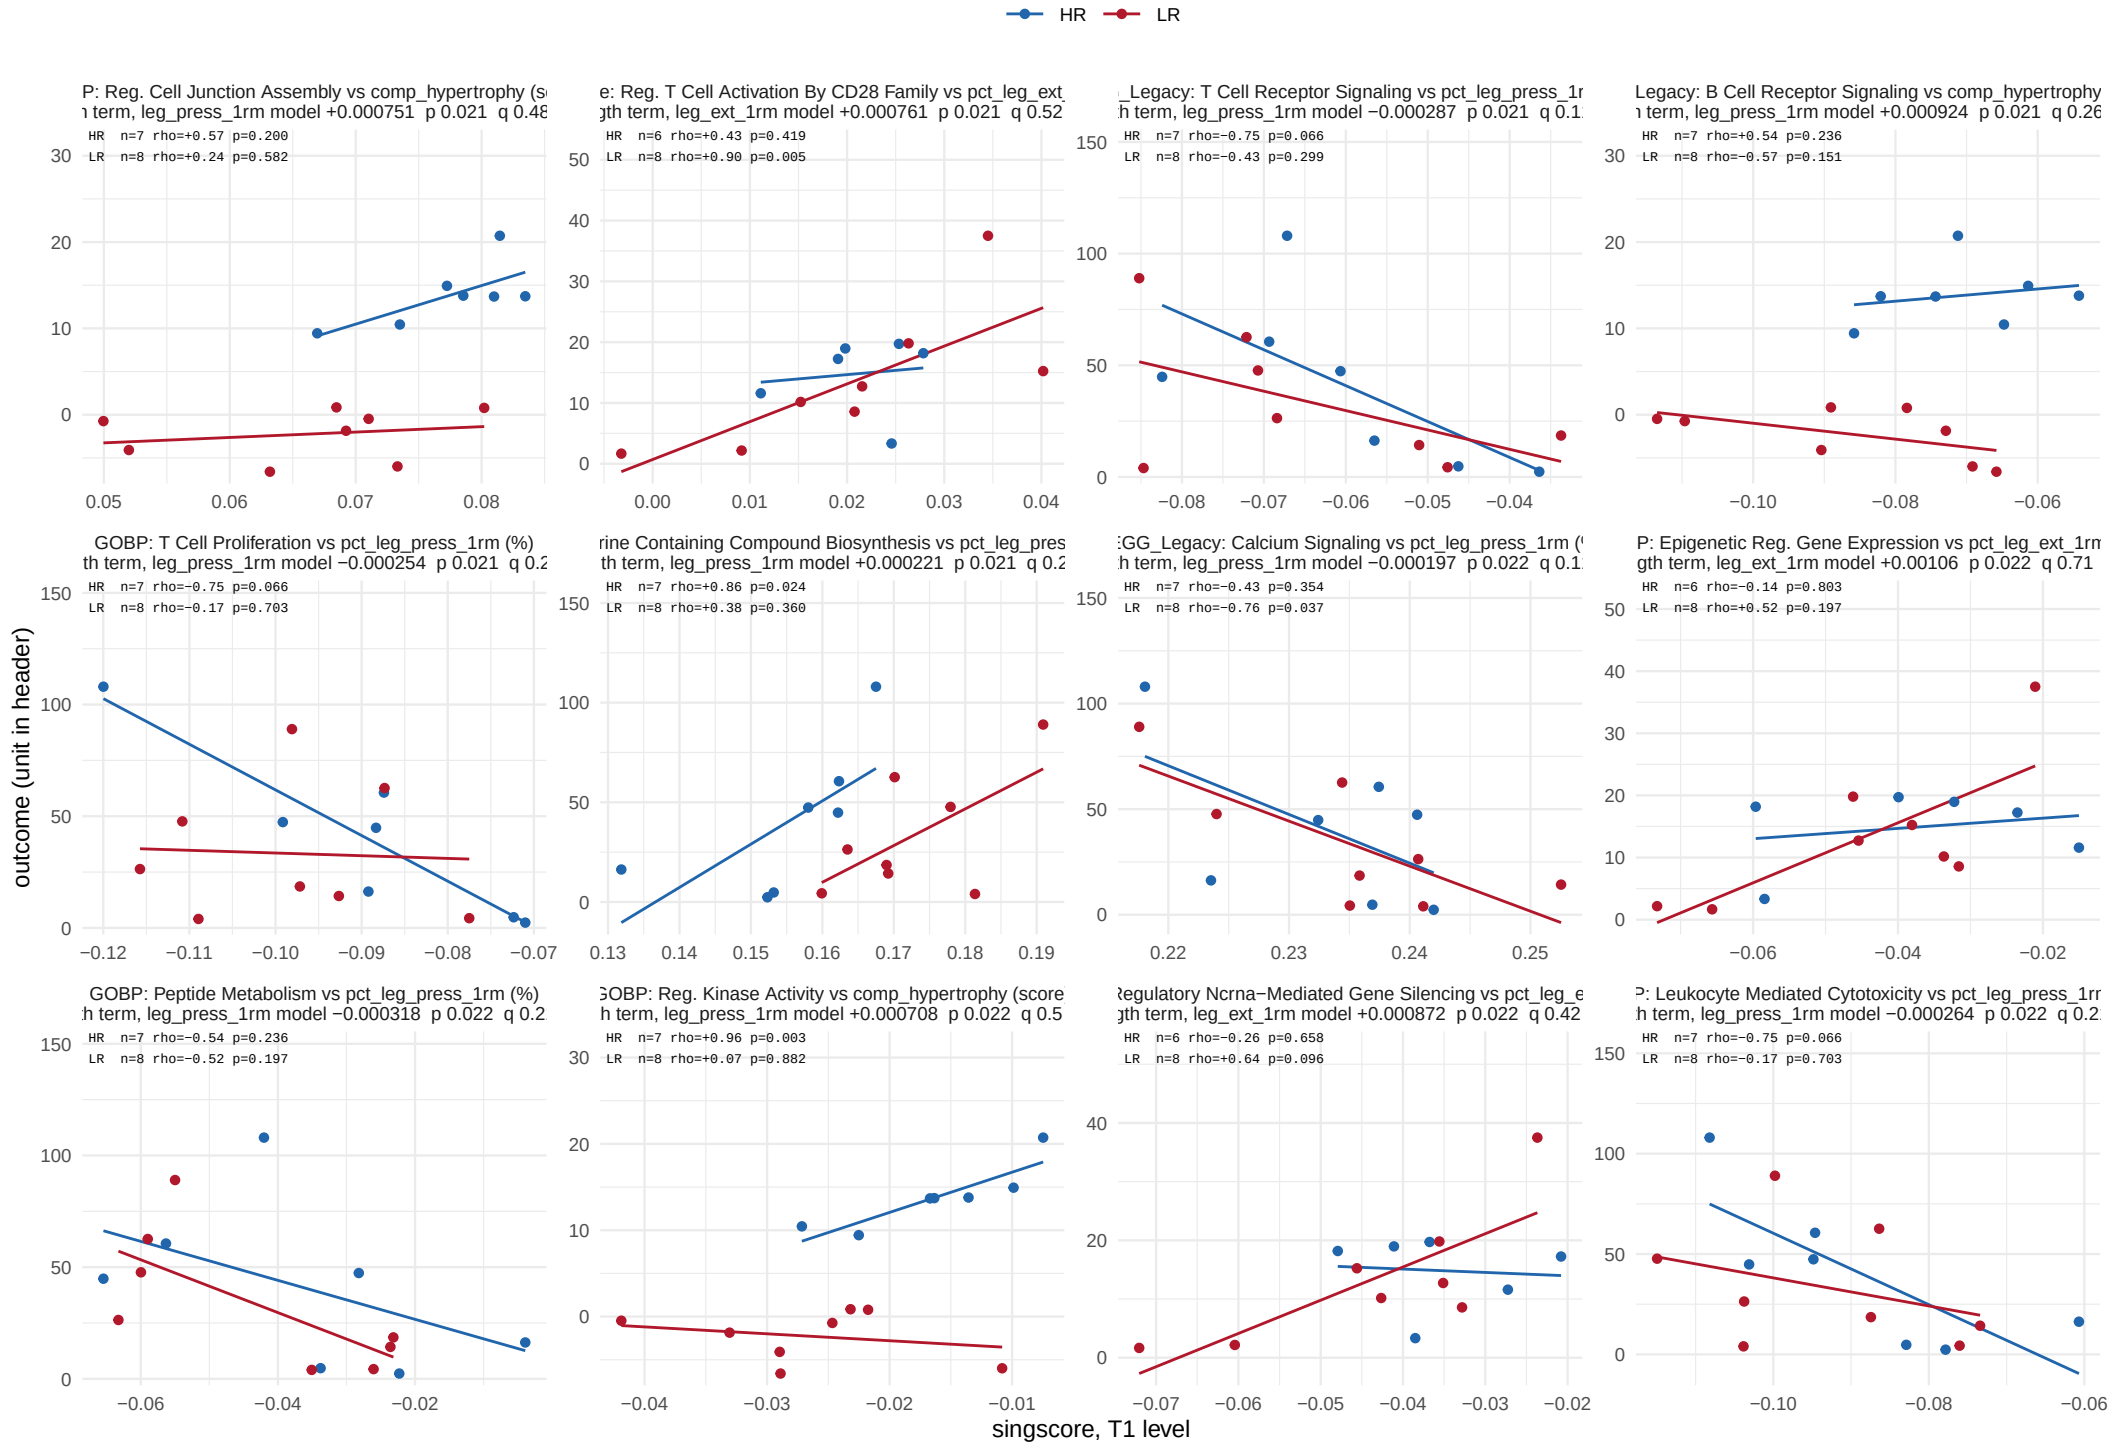


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

## Two predictor, baseline window


410 of 5512 feature−outcome pairs at p < 0.05, 20 at BH < 0.05. Page 20 of 35.

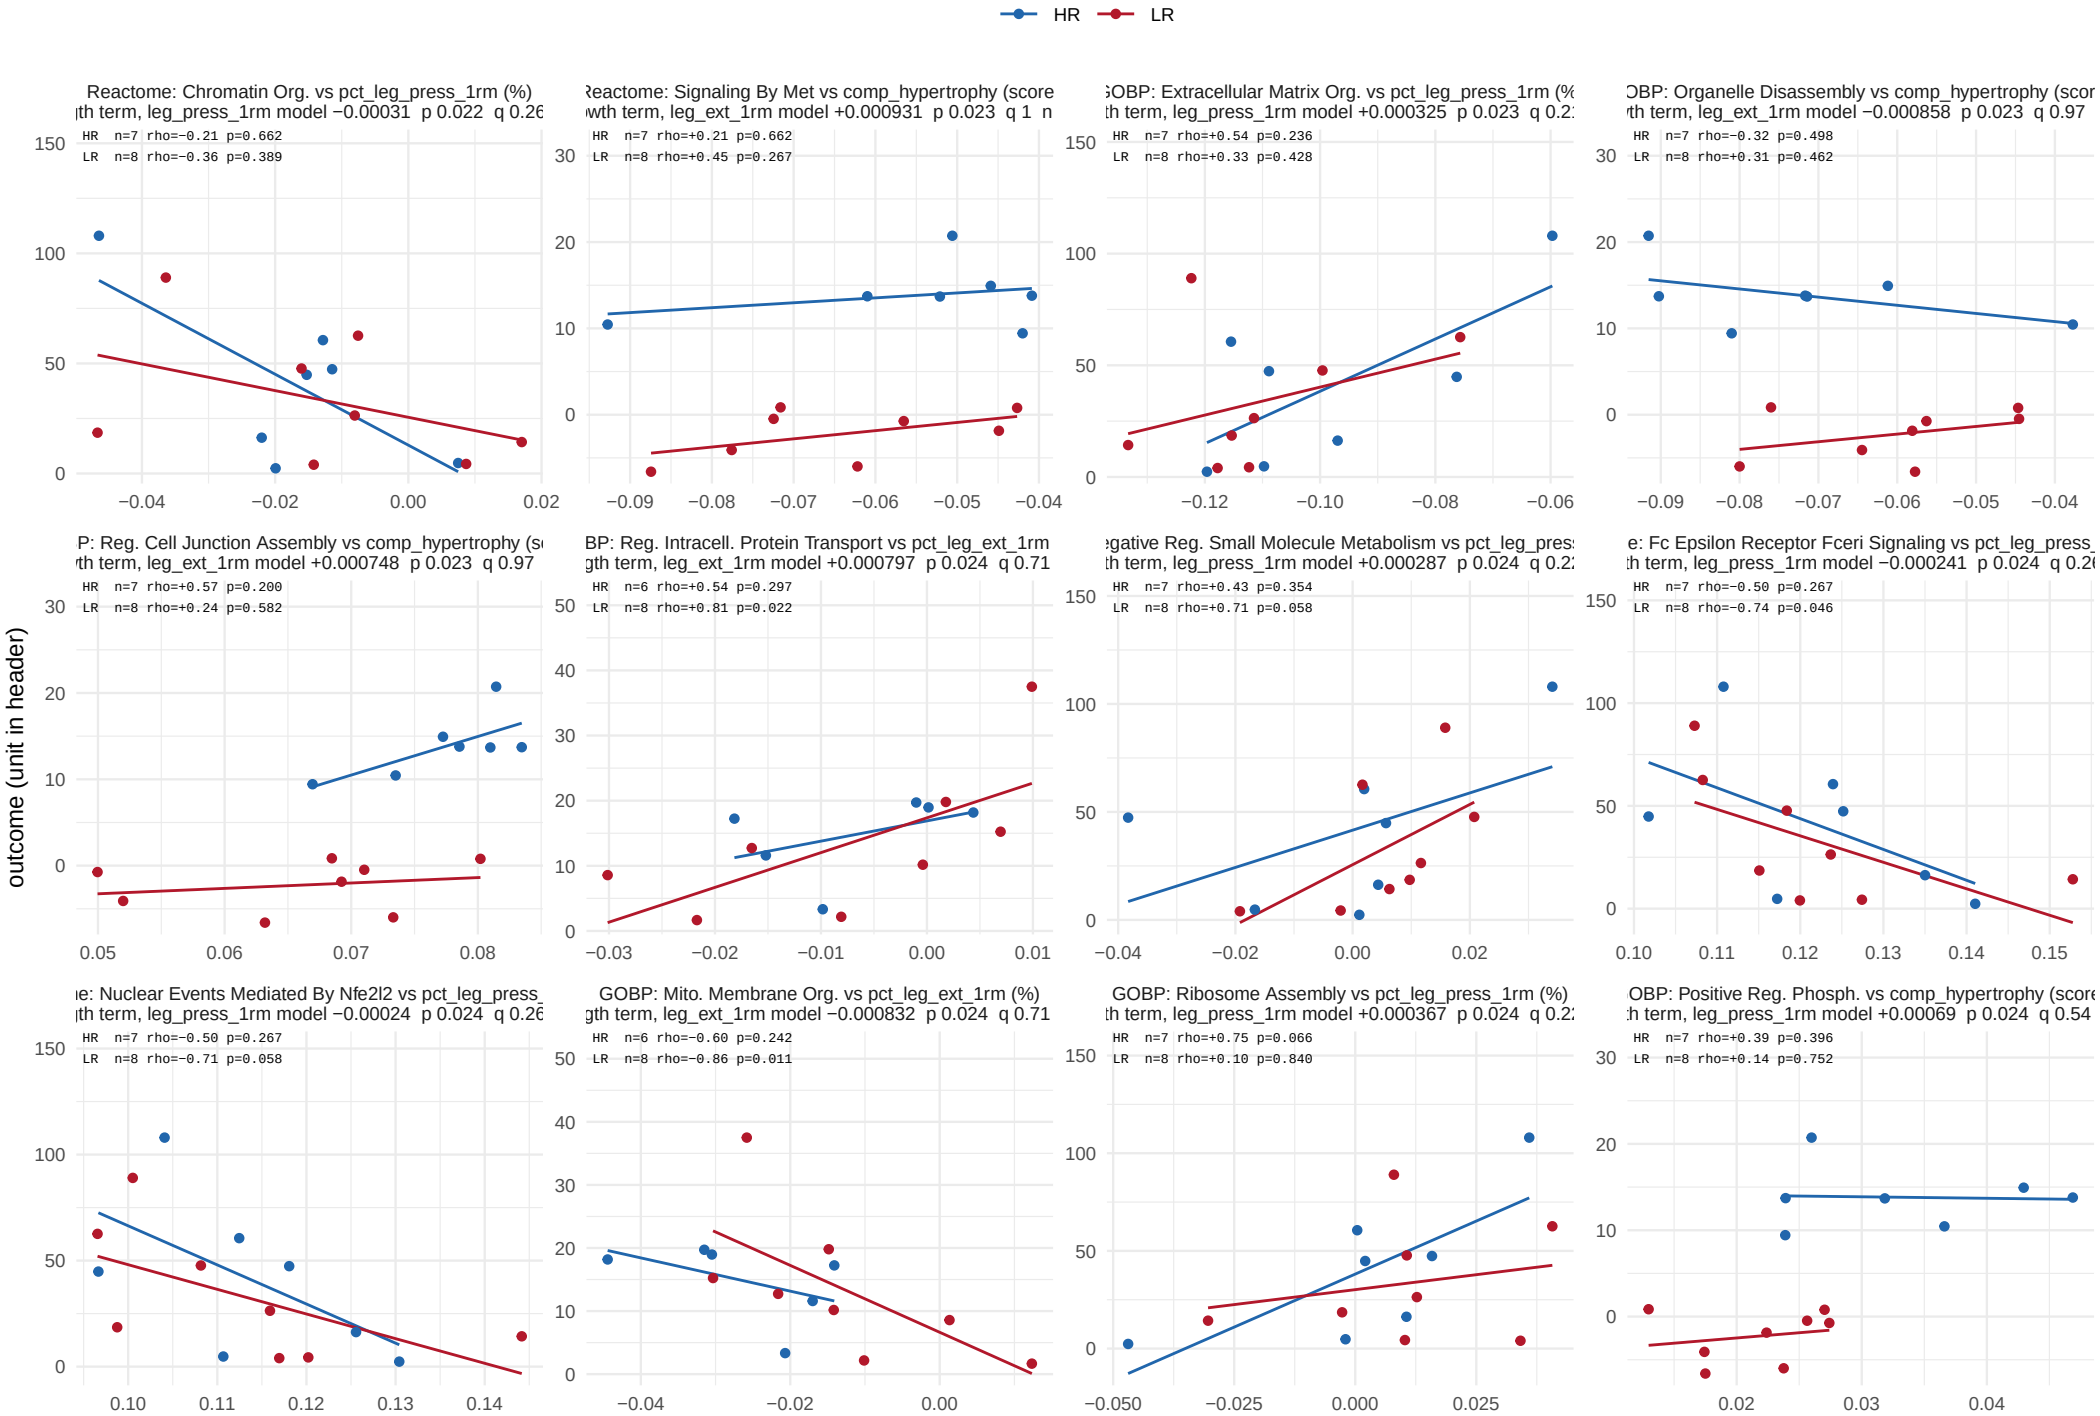


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

## Two predictor, baseline window


410 of 5512 feature−outcome pairs at p < 0.05, 20 at BH < 0.05. Page 21 of 35.

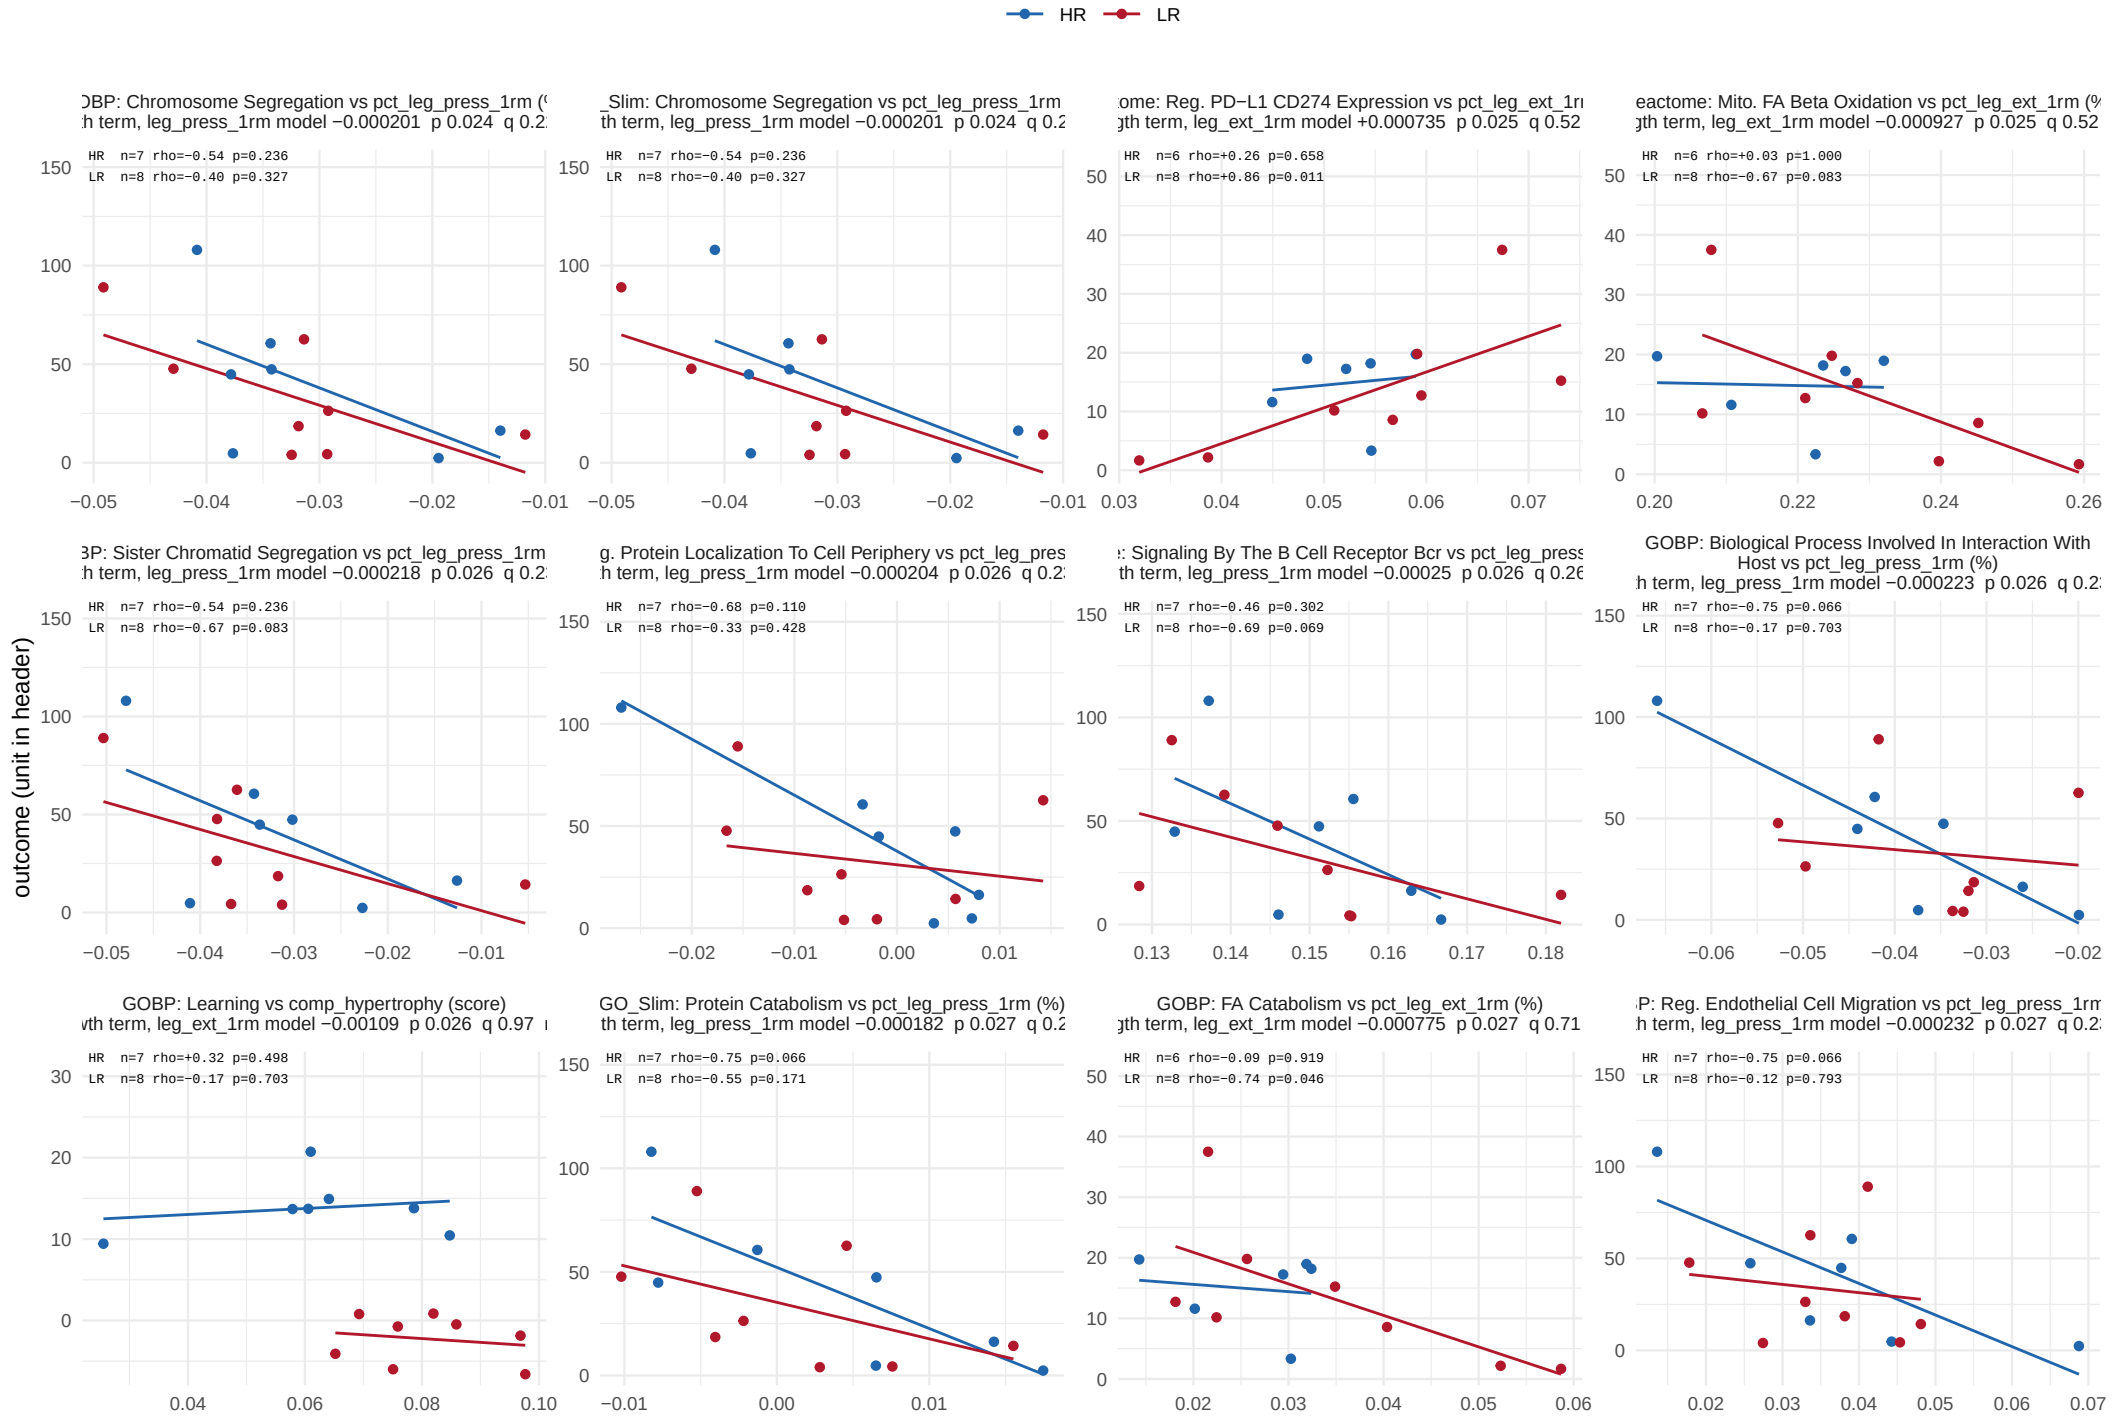


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

## Two predictor, baseline window


410 of 5512 feature−outcome pairs at p < 0.05, 20 at BH < 0.05. Page 22 of 35.

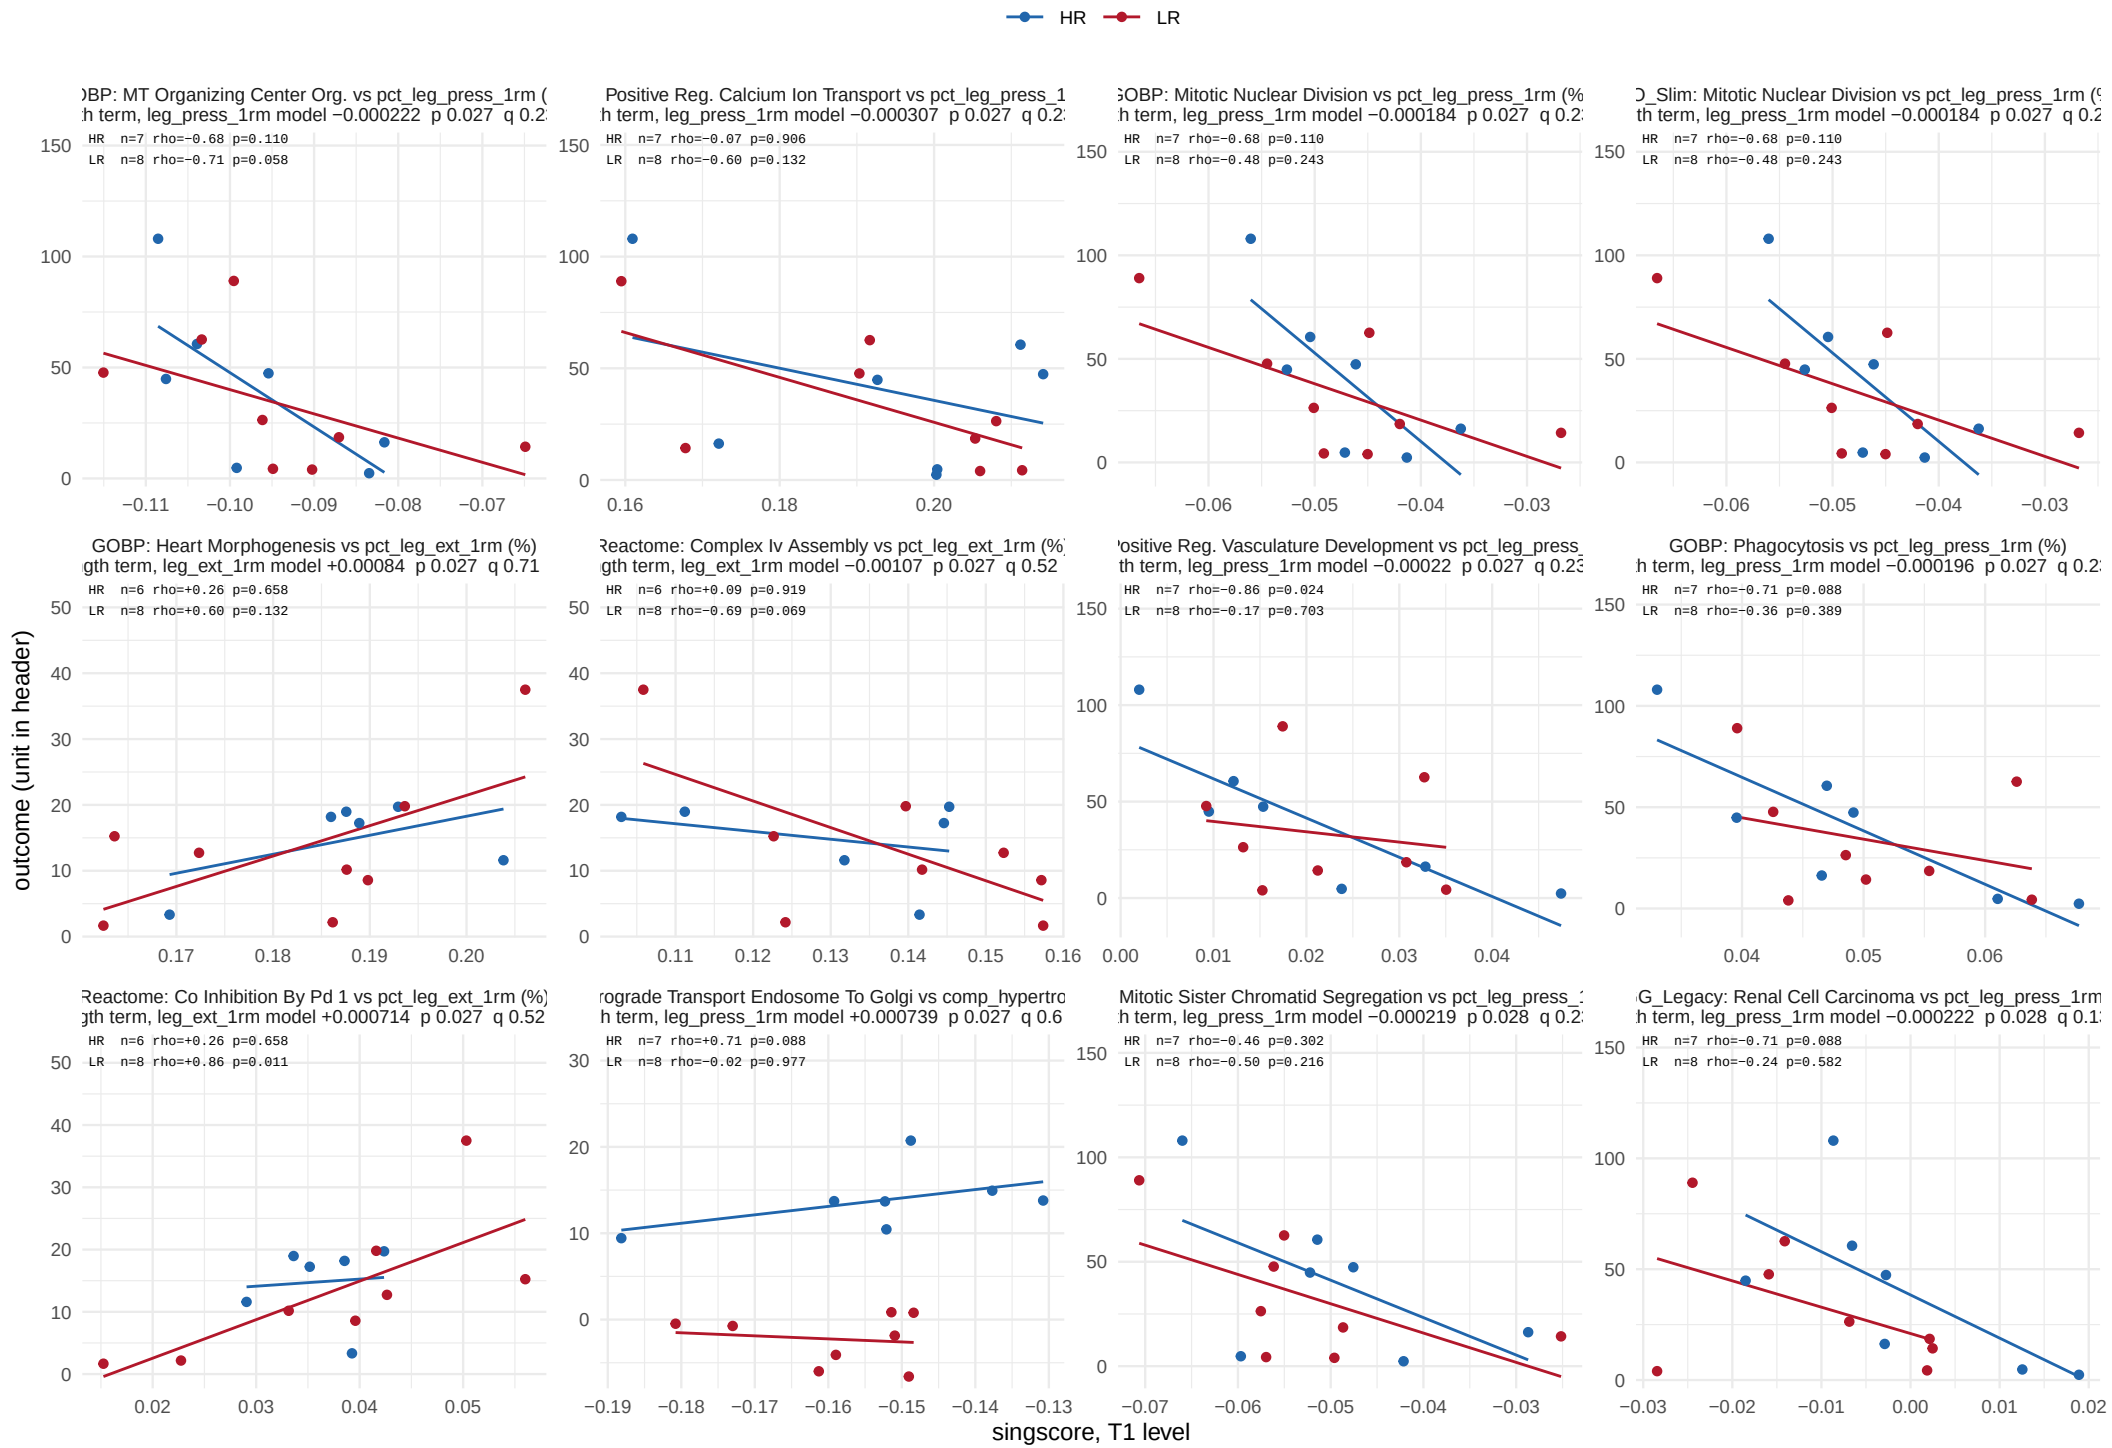


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

# Two predictor, baseline window


410 of 5512 feature−outcome pairs at p < 0.05, 20 at BH < 0.05. Page 23 of 35.

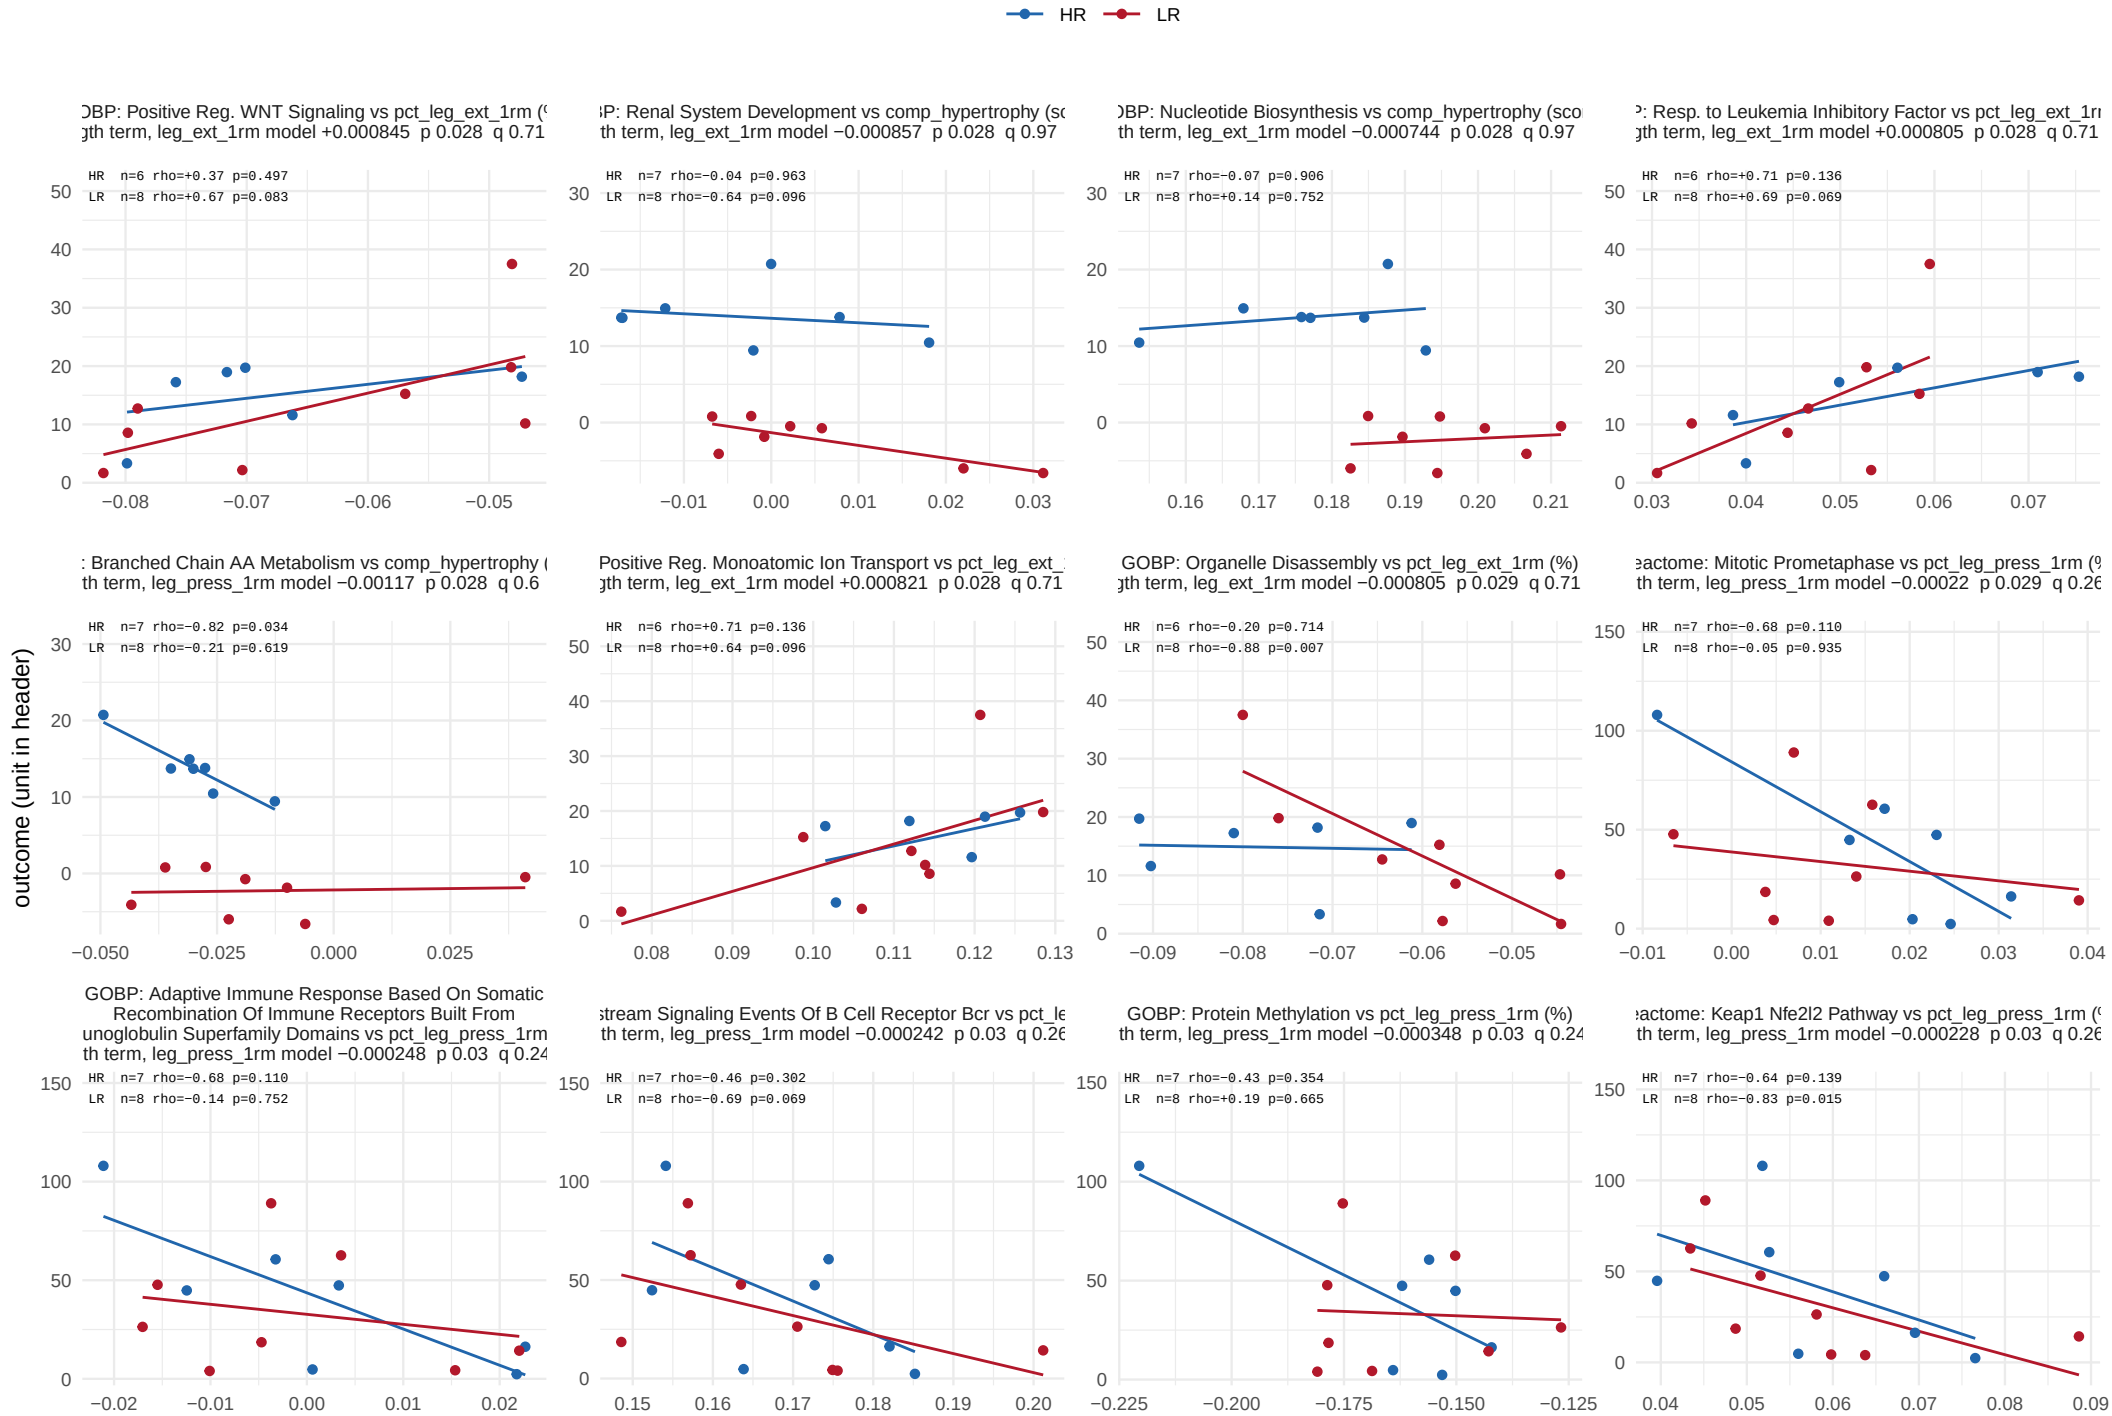


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

## Two predictor, baseline window


410 of 5512 feature−outcome pairs at p < 0.05, 20 at BH < 0.05. Page 24 of 35.

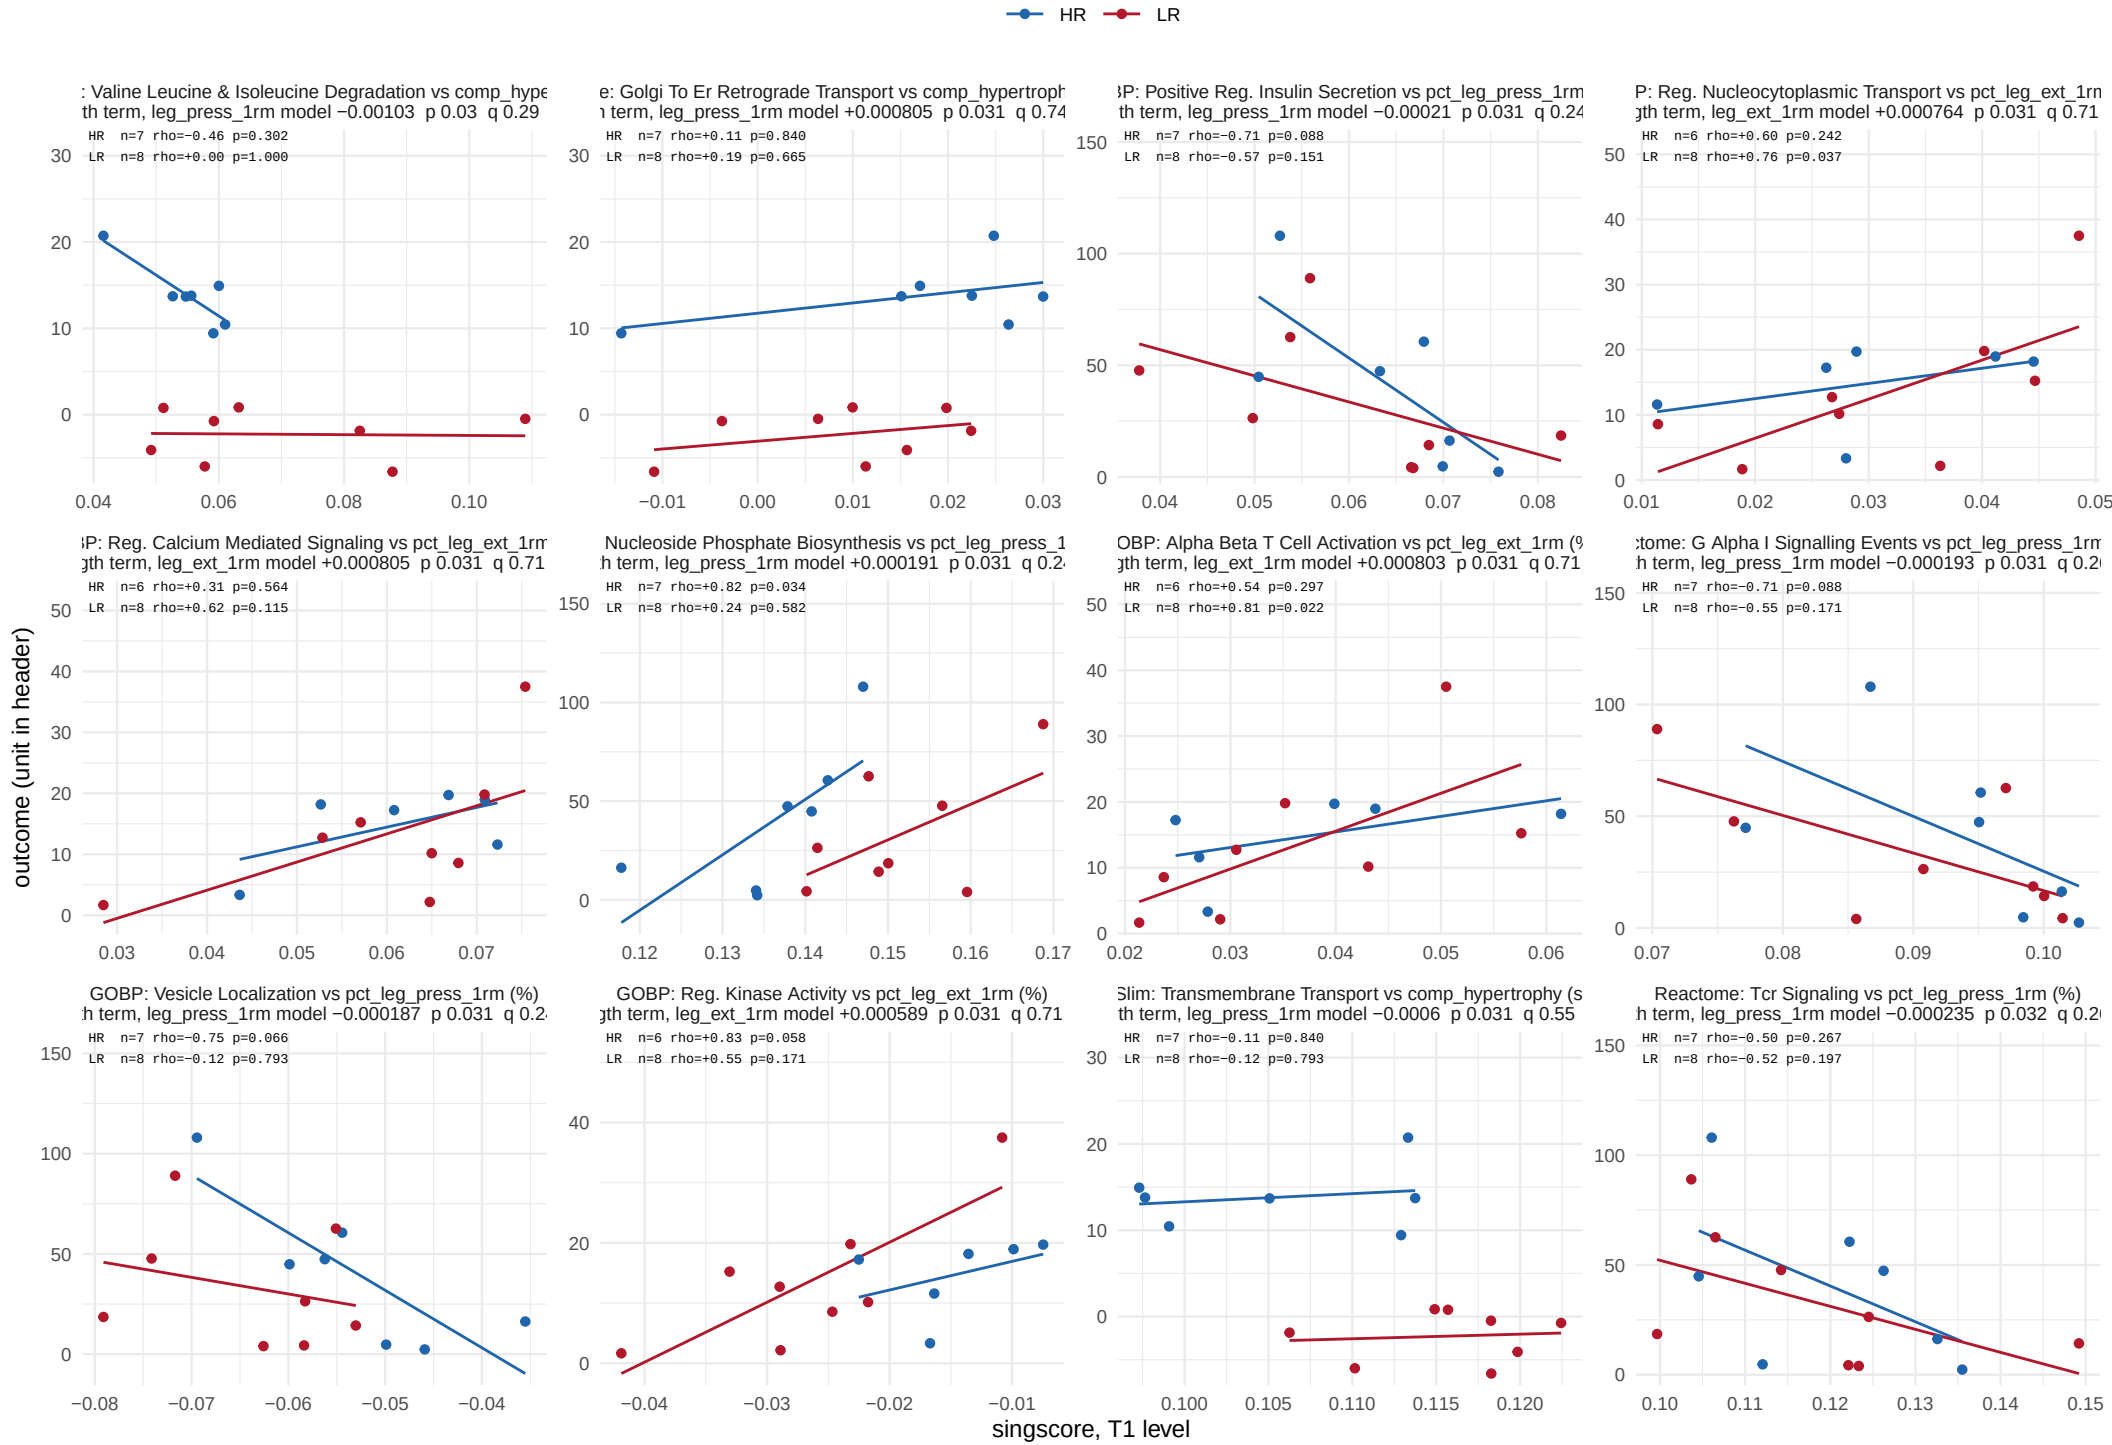


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

## Two predictor, baseline window


410 of 5512 feature−outcome pairs at p < 0.05, 20 at BH < 0.05. Page 25 of 35.

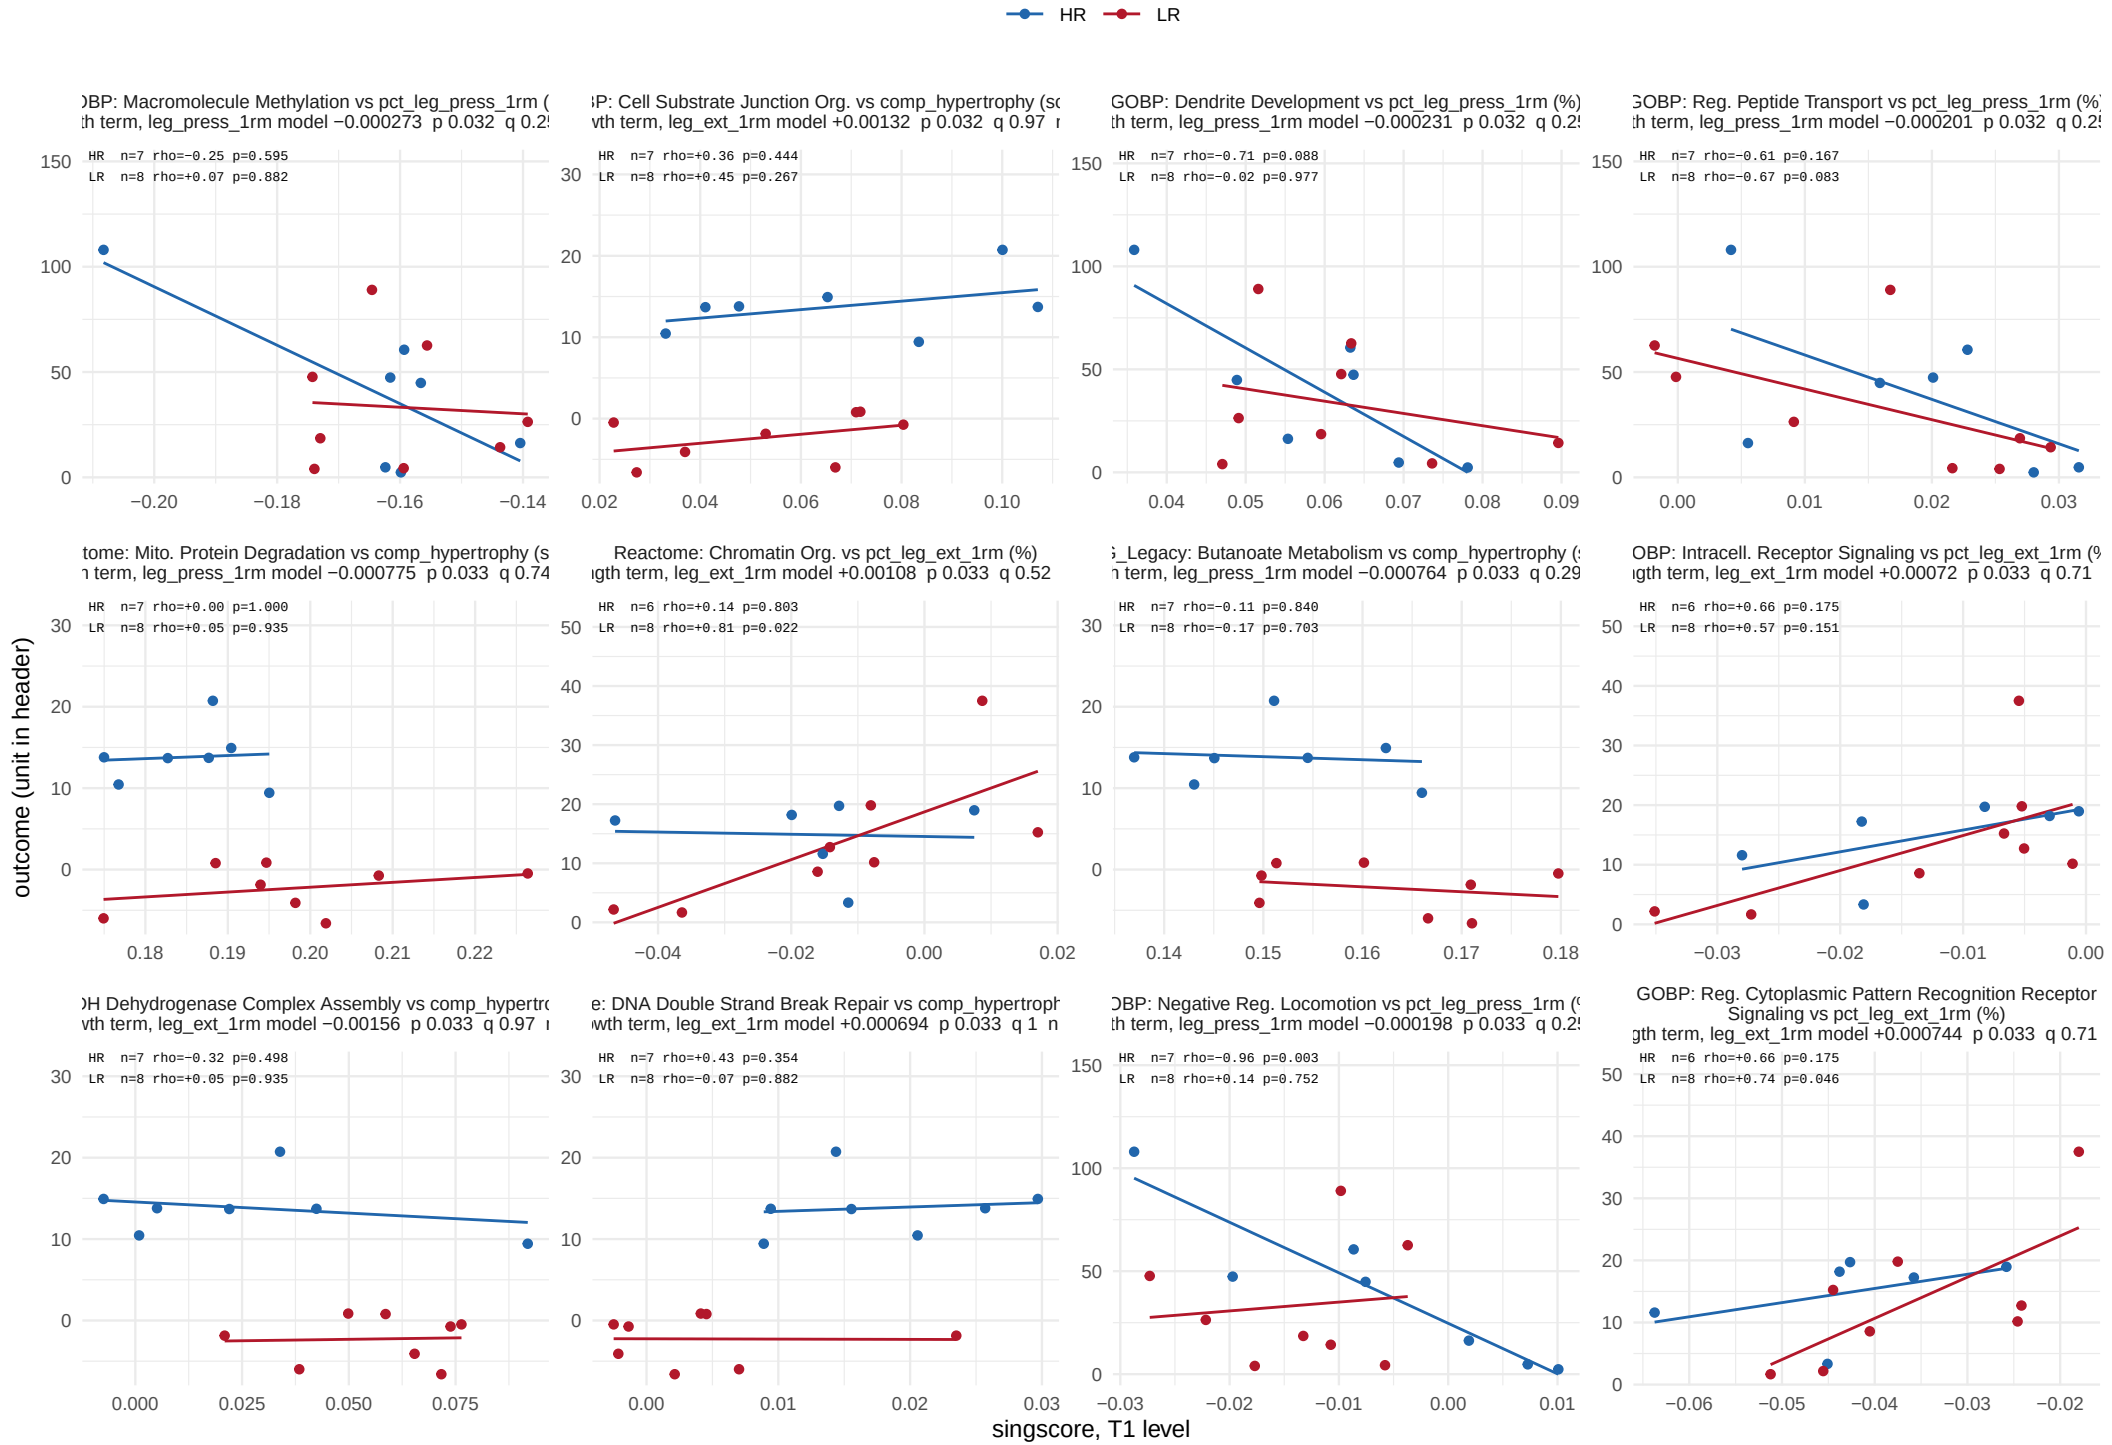


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

## Two predictor, baseline window


410 of 5512 feature−outcome pairs at p < 0.05, 20 at BH < 0.05. Page 26 of 35.

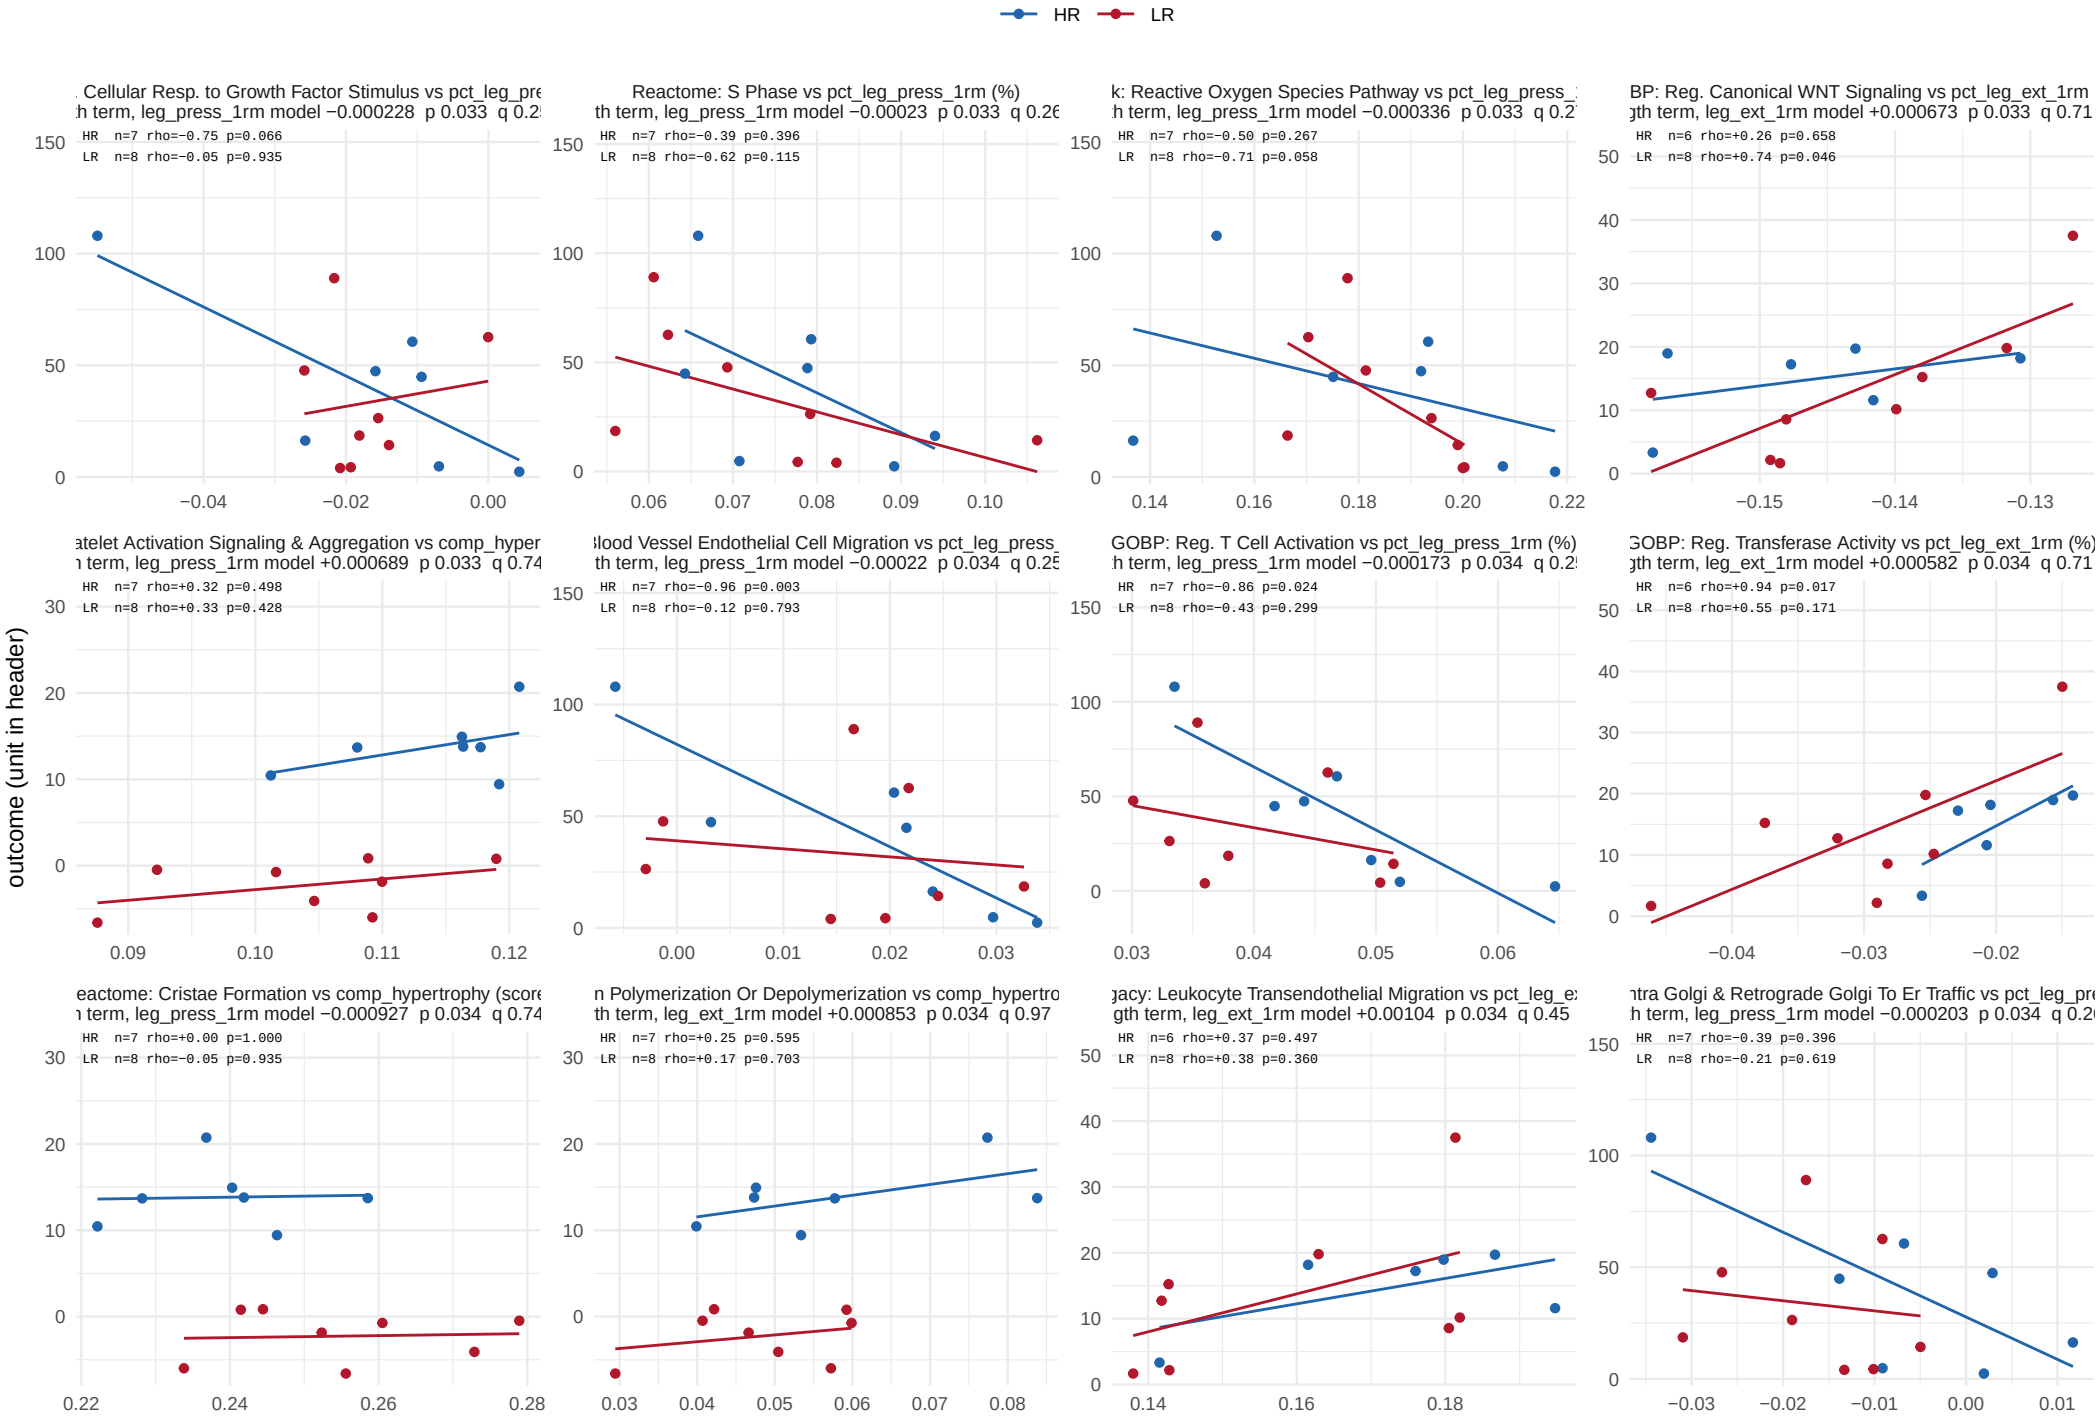


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

## Two predictor, baseline window


410 of 5512 feature−outcome pairs at p < 0.05, 20 at BH < 0.05. Page 27 of 35.

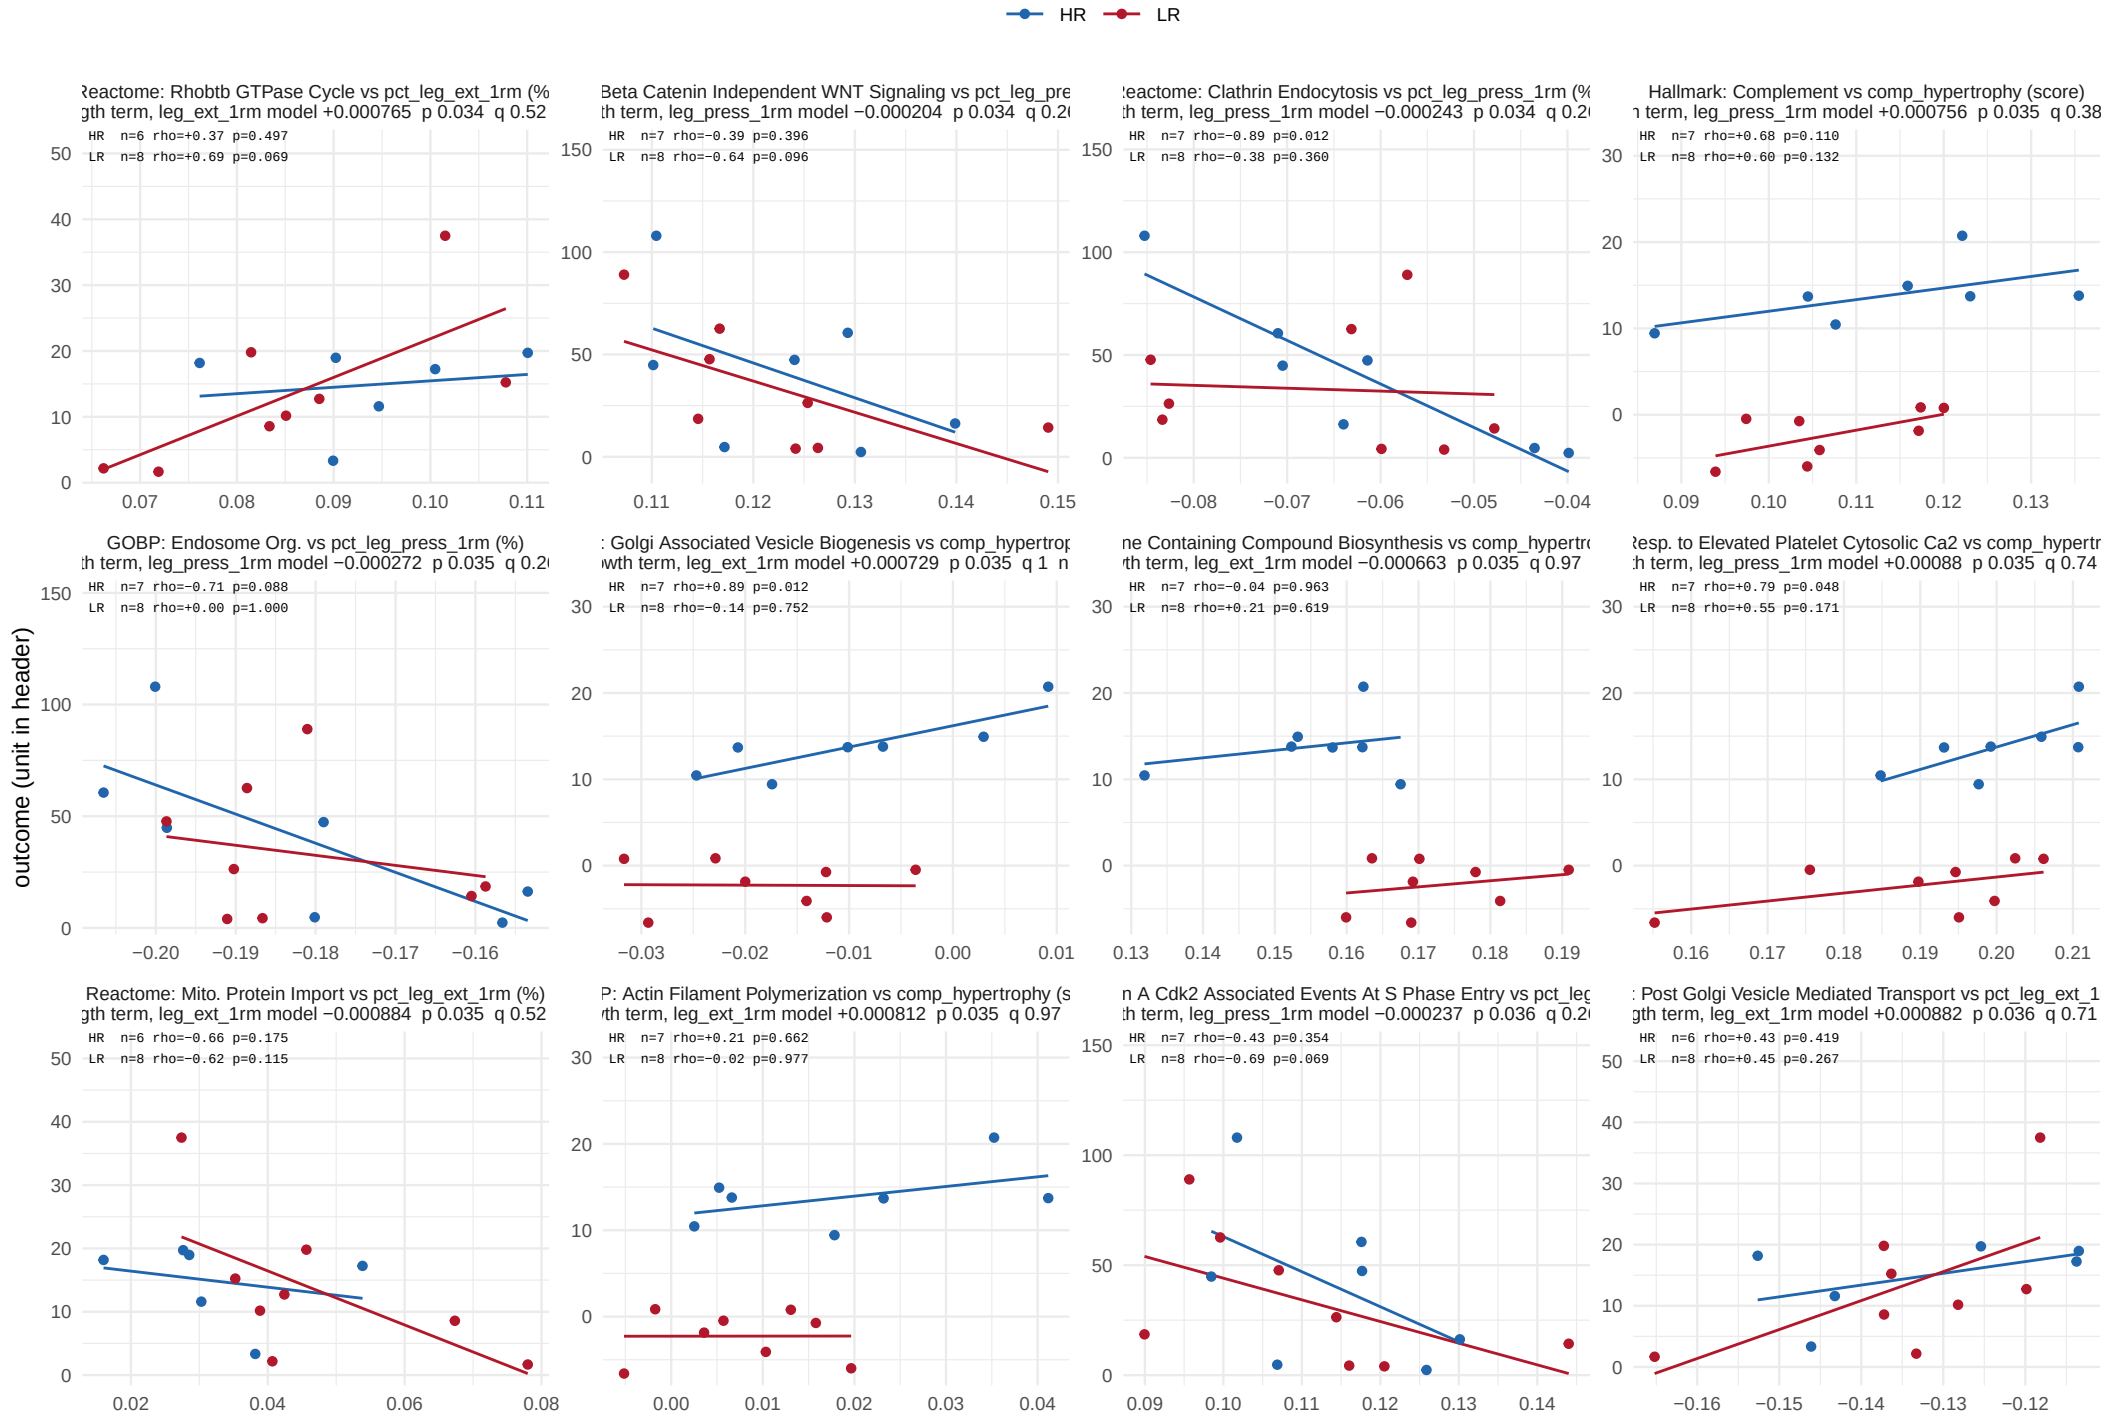


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

## Two predictor, baseline window


410 of 5512 feature−outcome pairs at p < 0.05, 20 at BH < 0.05. Page 28 of 35.

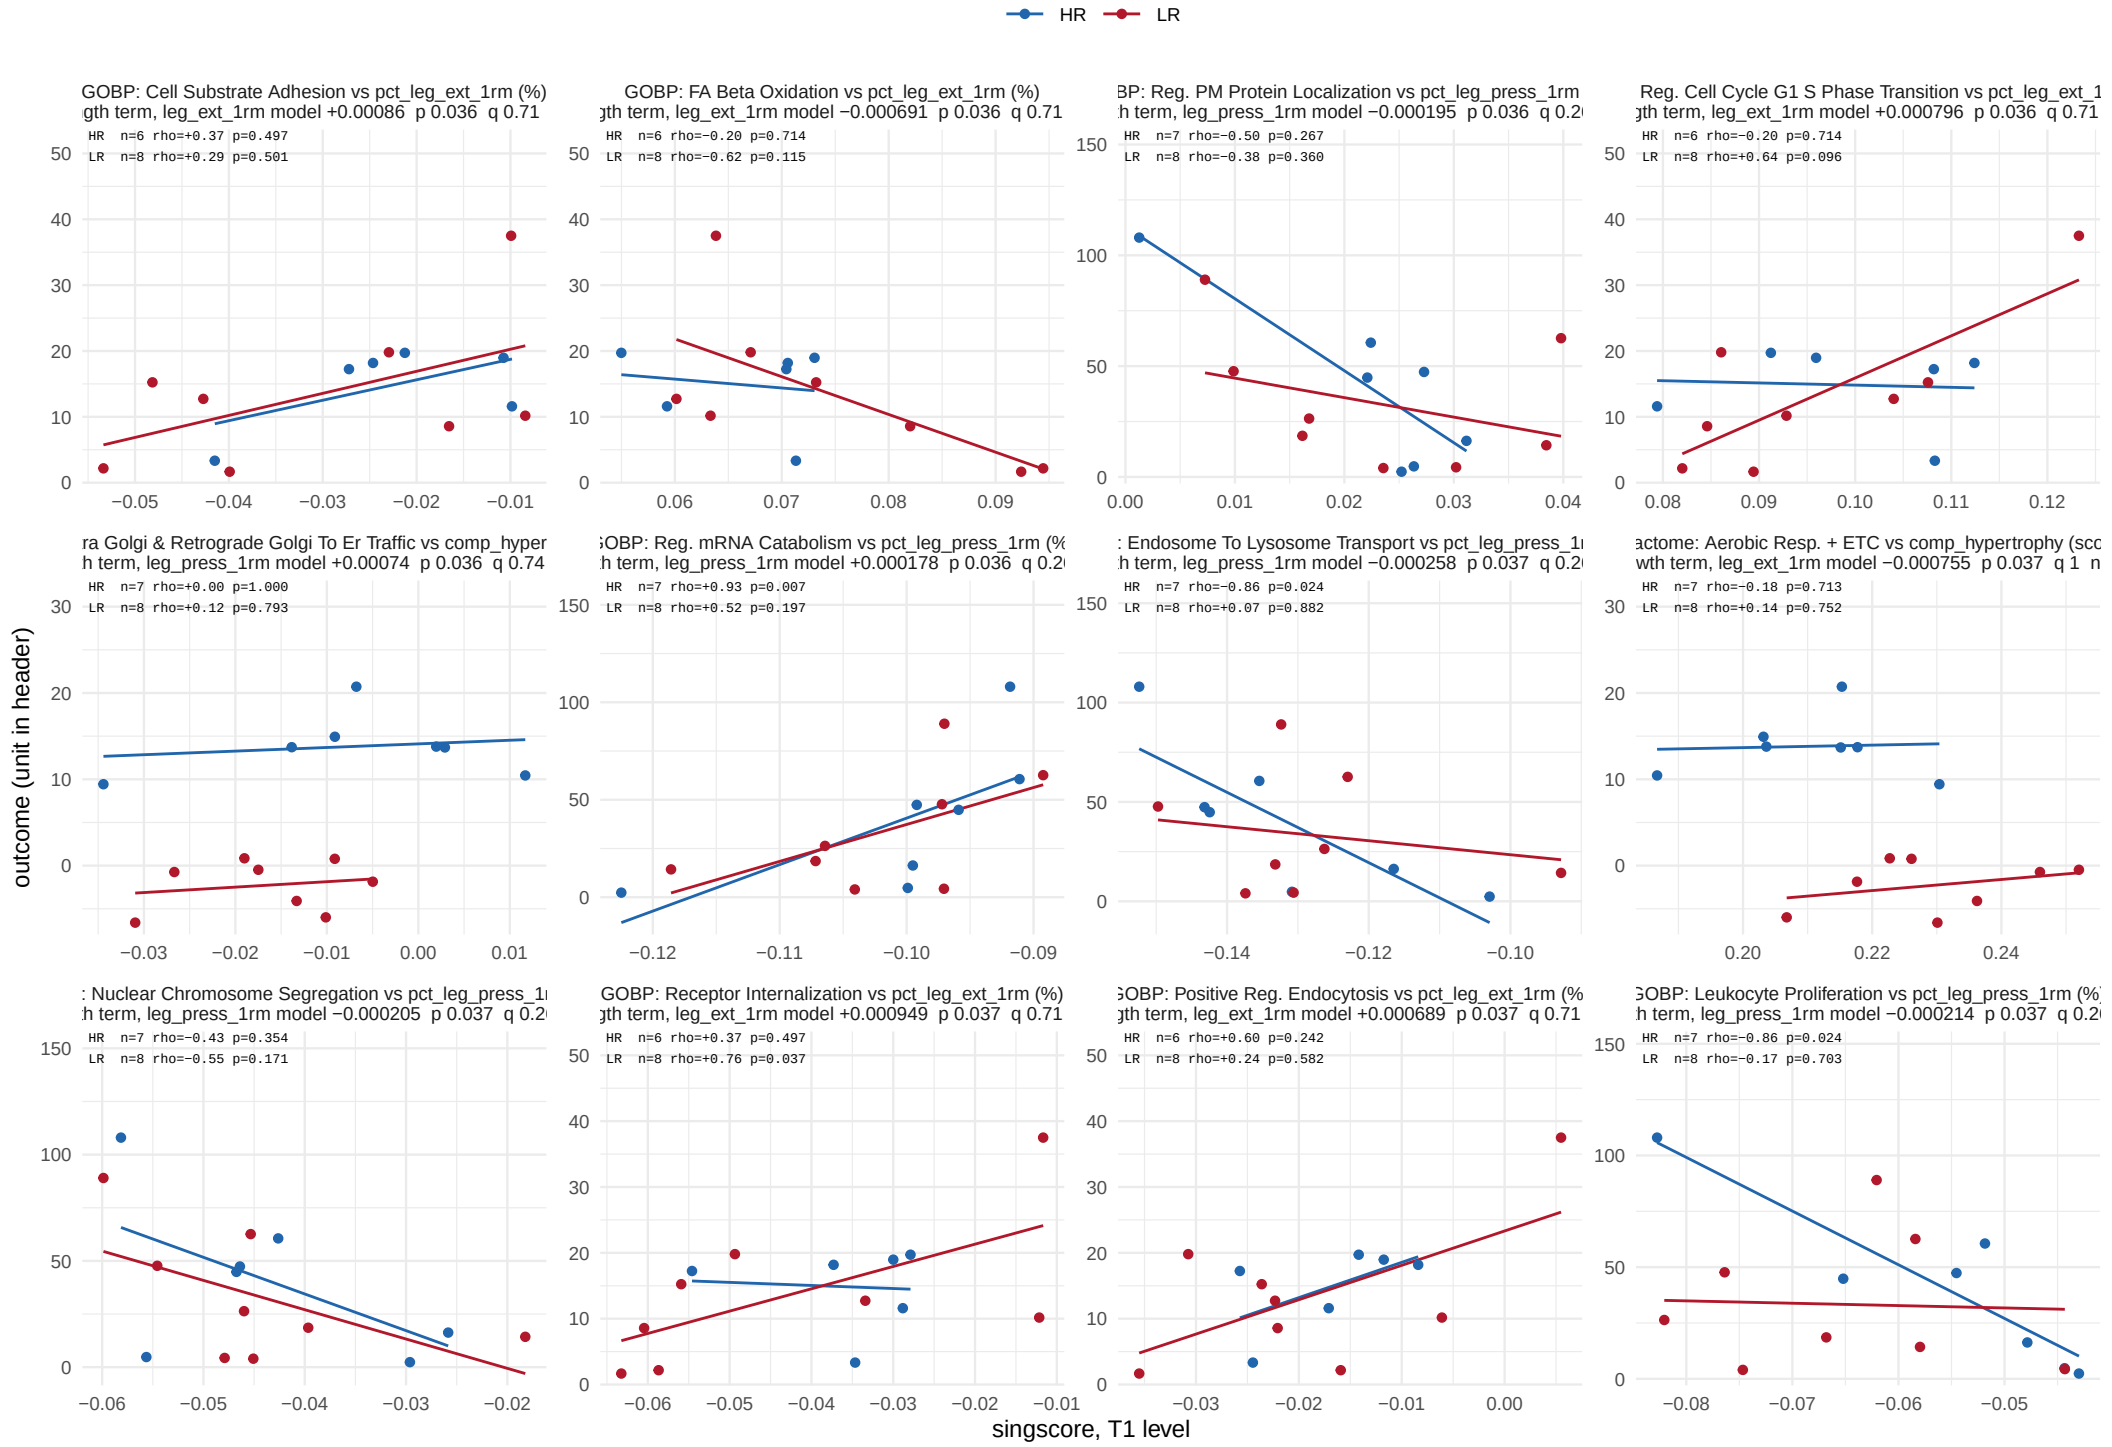


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

## Two predictor, baseline window


410 of 5512 feature−outcome pairs at p < 0.05, 20 at BH < 0.05. Page 29 of 35.

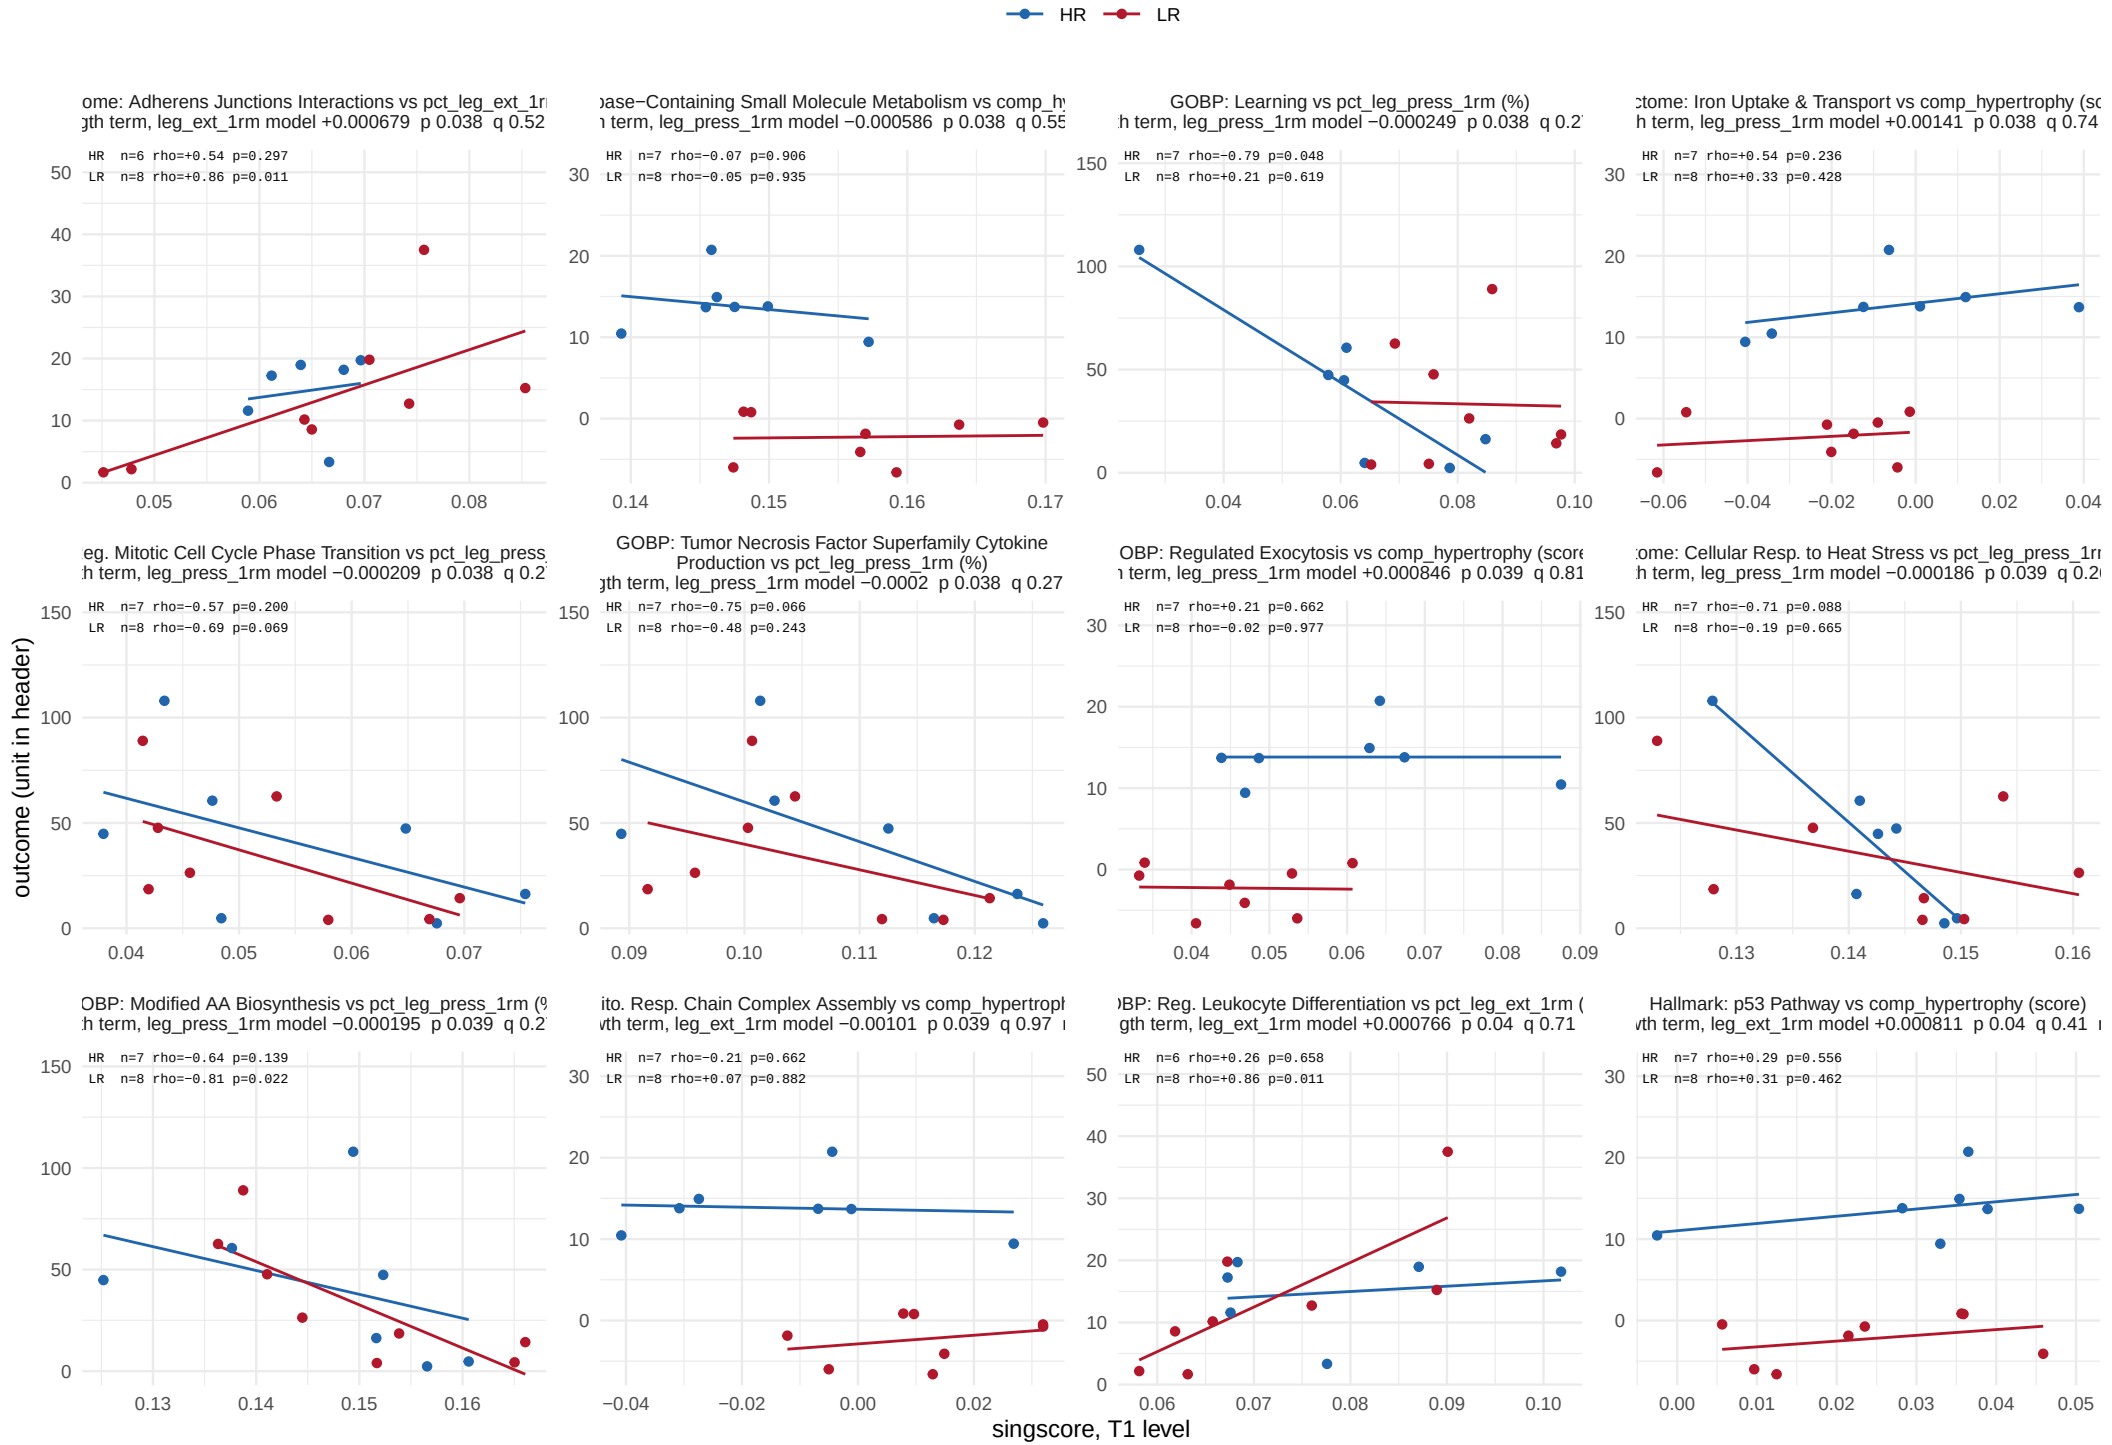


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

## Two predictor, baseline window


410 of 5512 feature−outcome pairs at p < 0.05, 20 at BH < 0.05. Page 30 of 35.

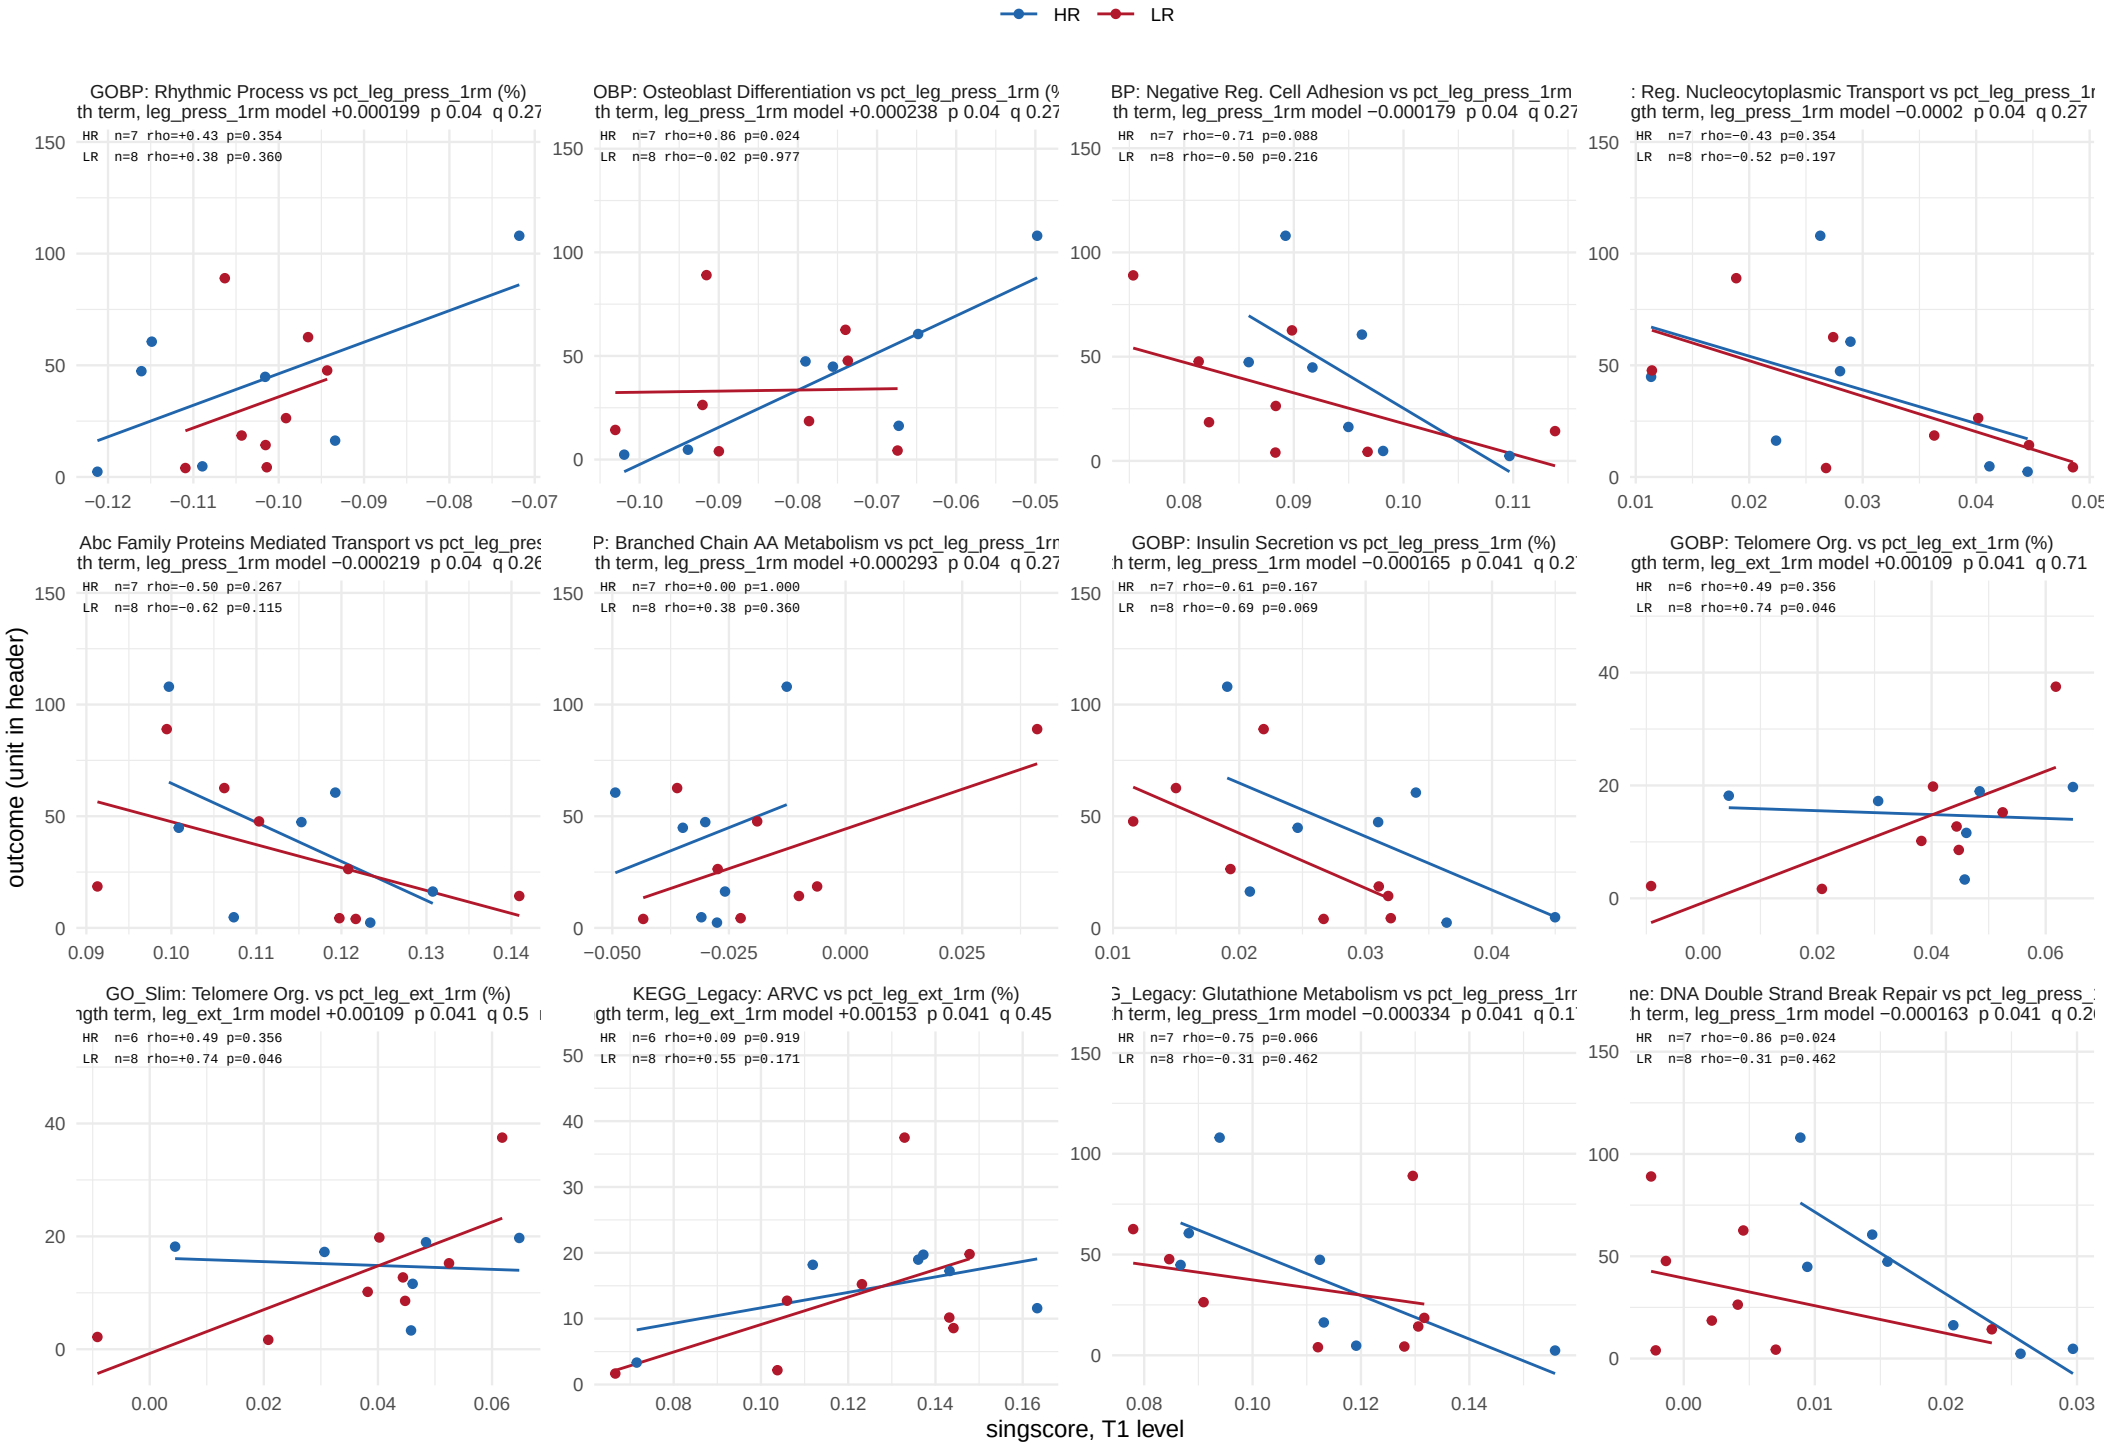


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

## Two predictor, baseline window


410 of 5512 feature−outcome pairs at p < 0.05, 20 at BH < 0.05. Page 31 of 35.

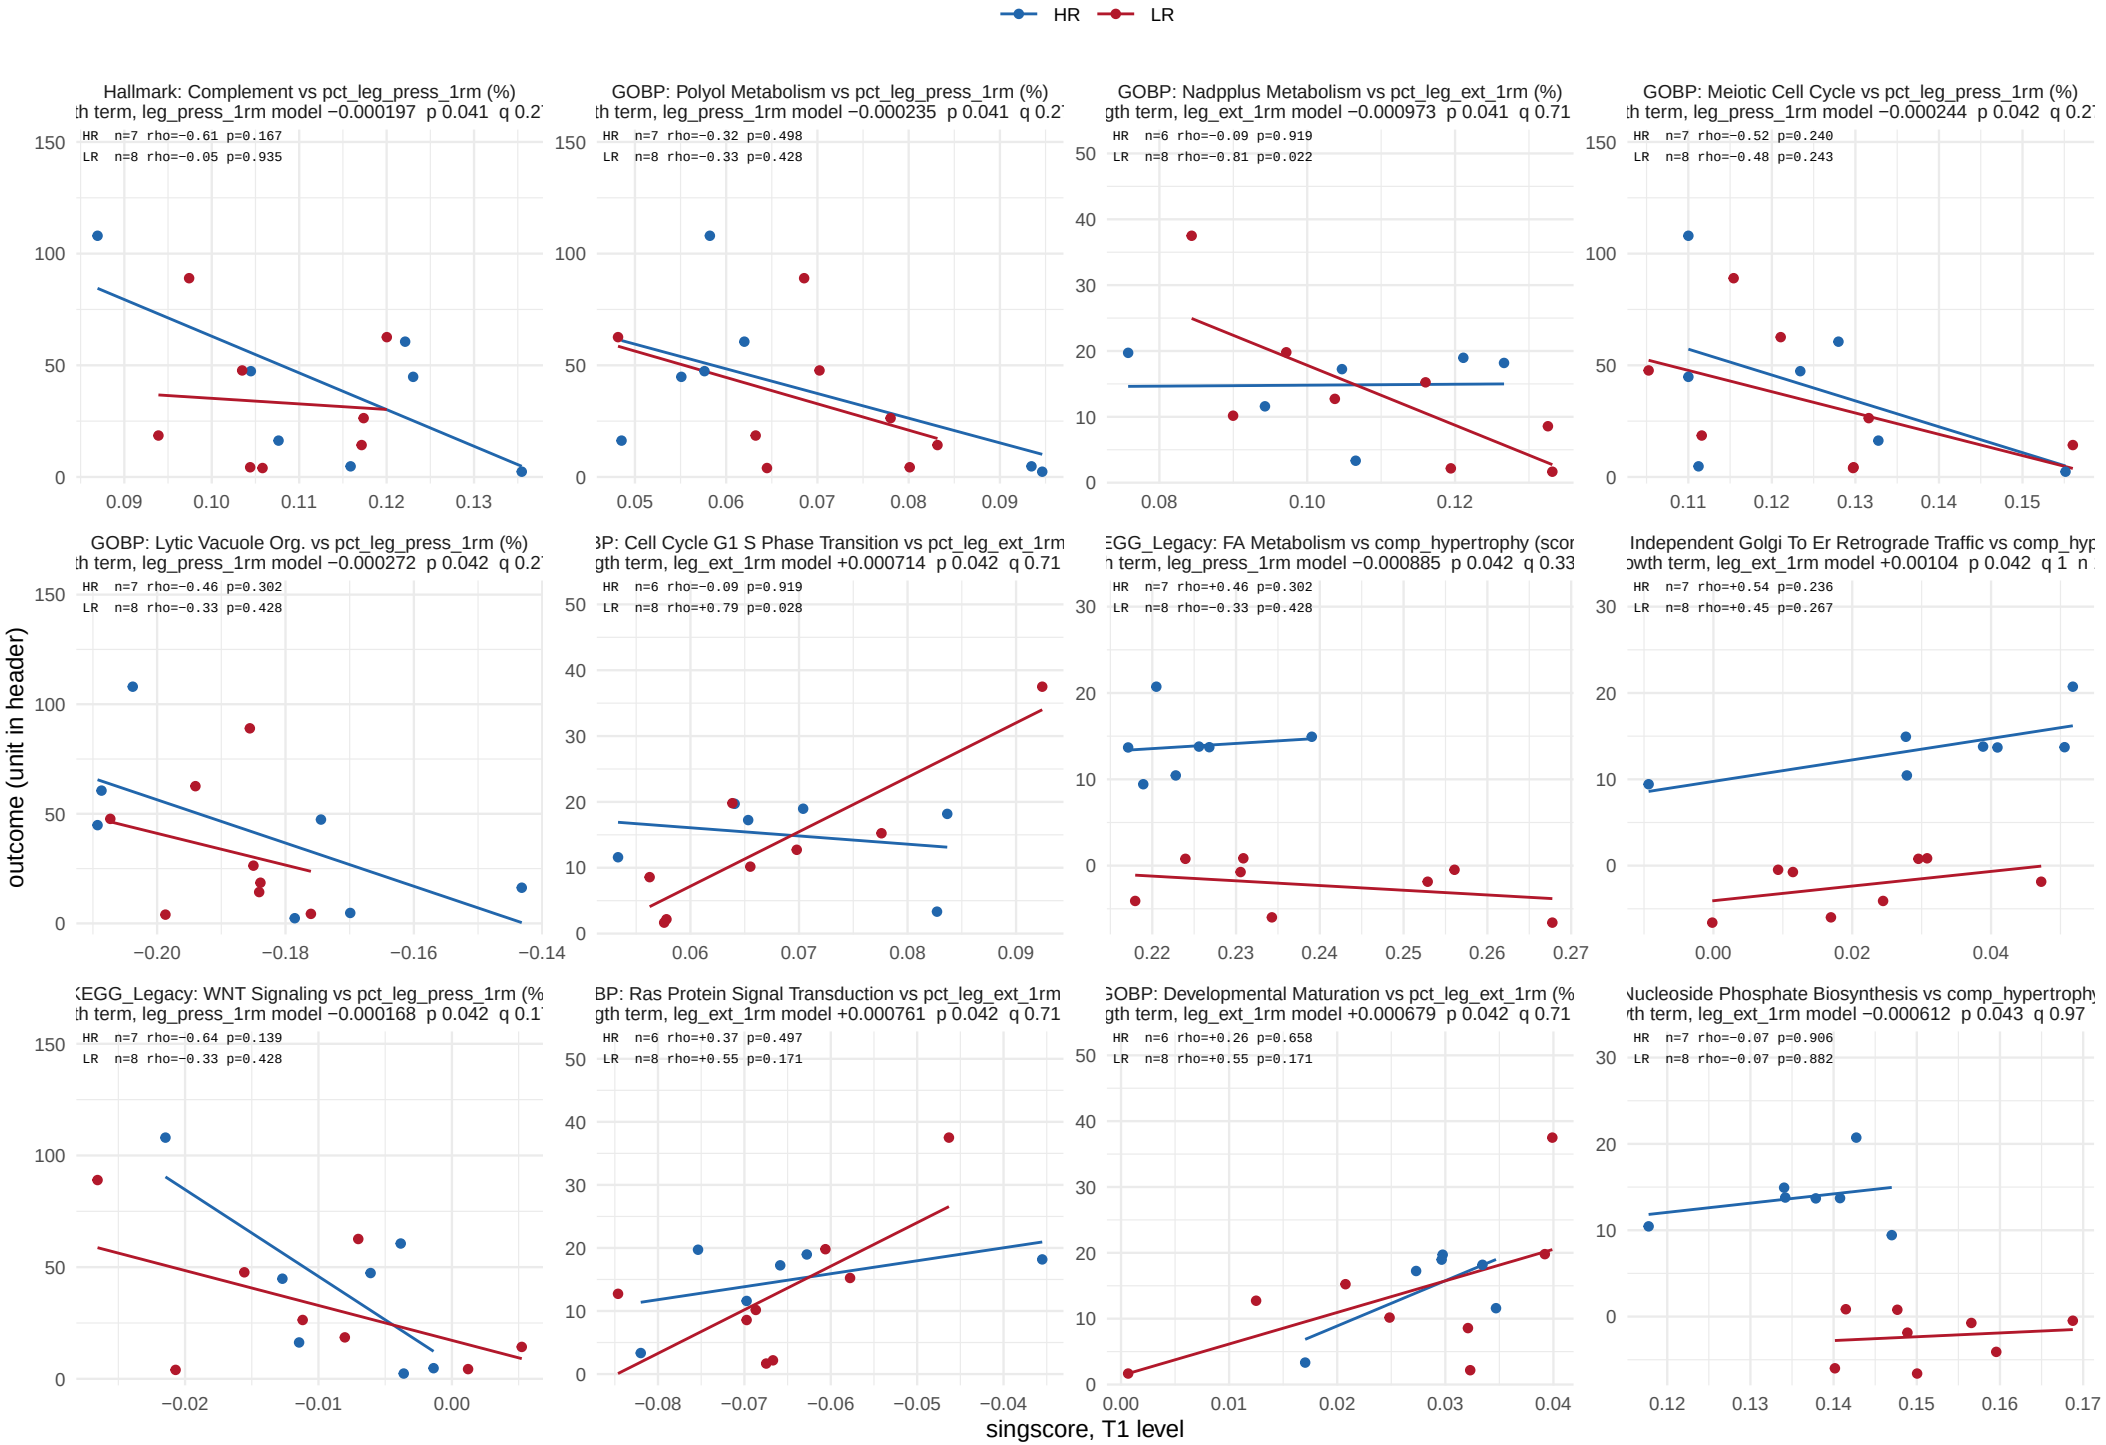


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

## Two predictor, baseline window


410 of 5512 feature−outcome pairs at p < 0.05, 20 at BH < 0.05. Page 32 of 35.

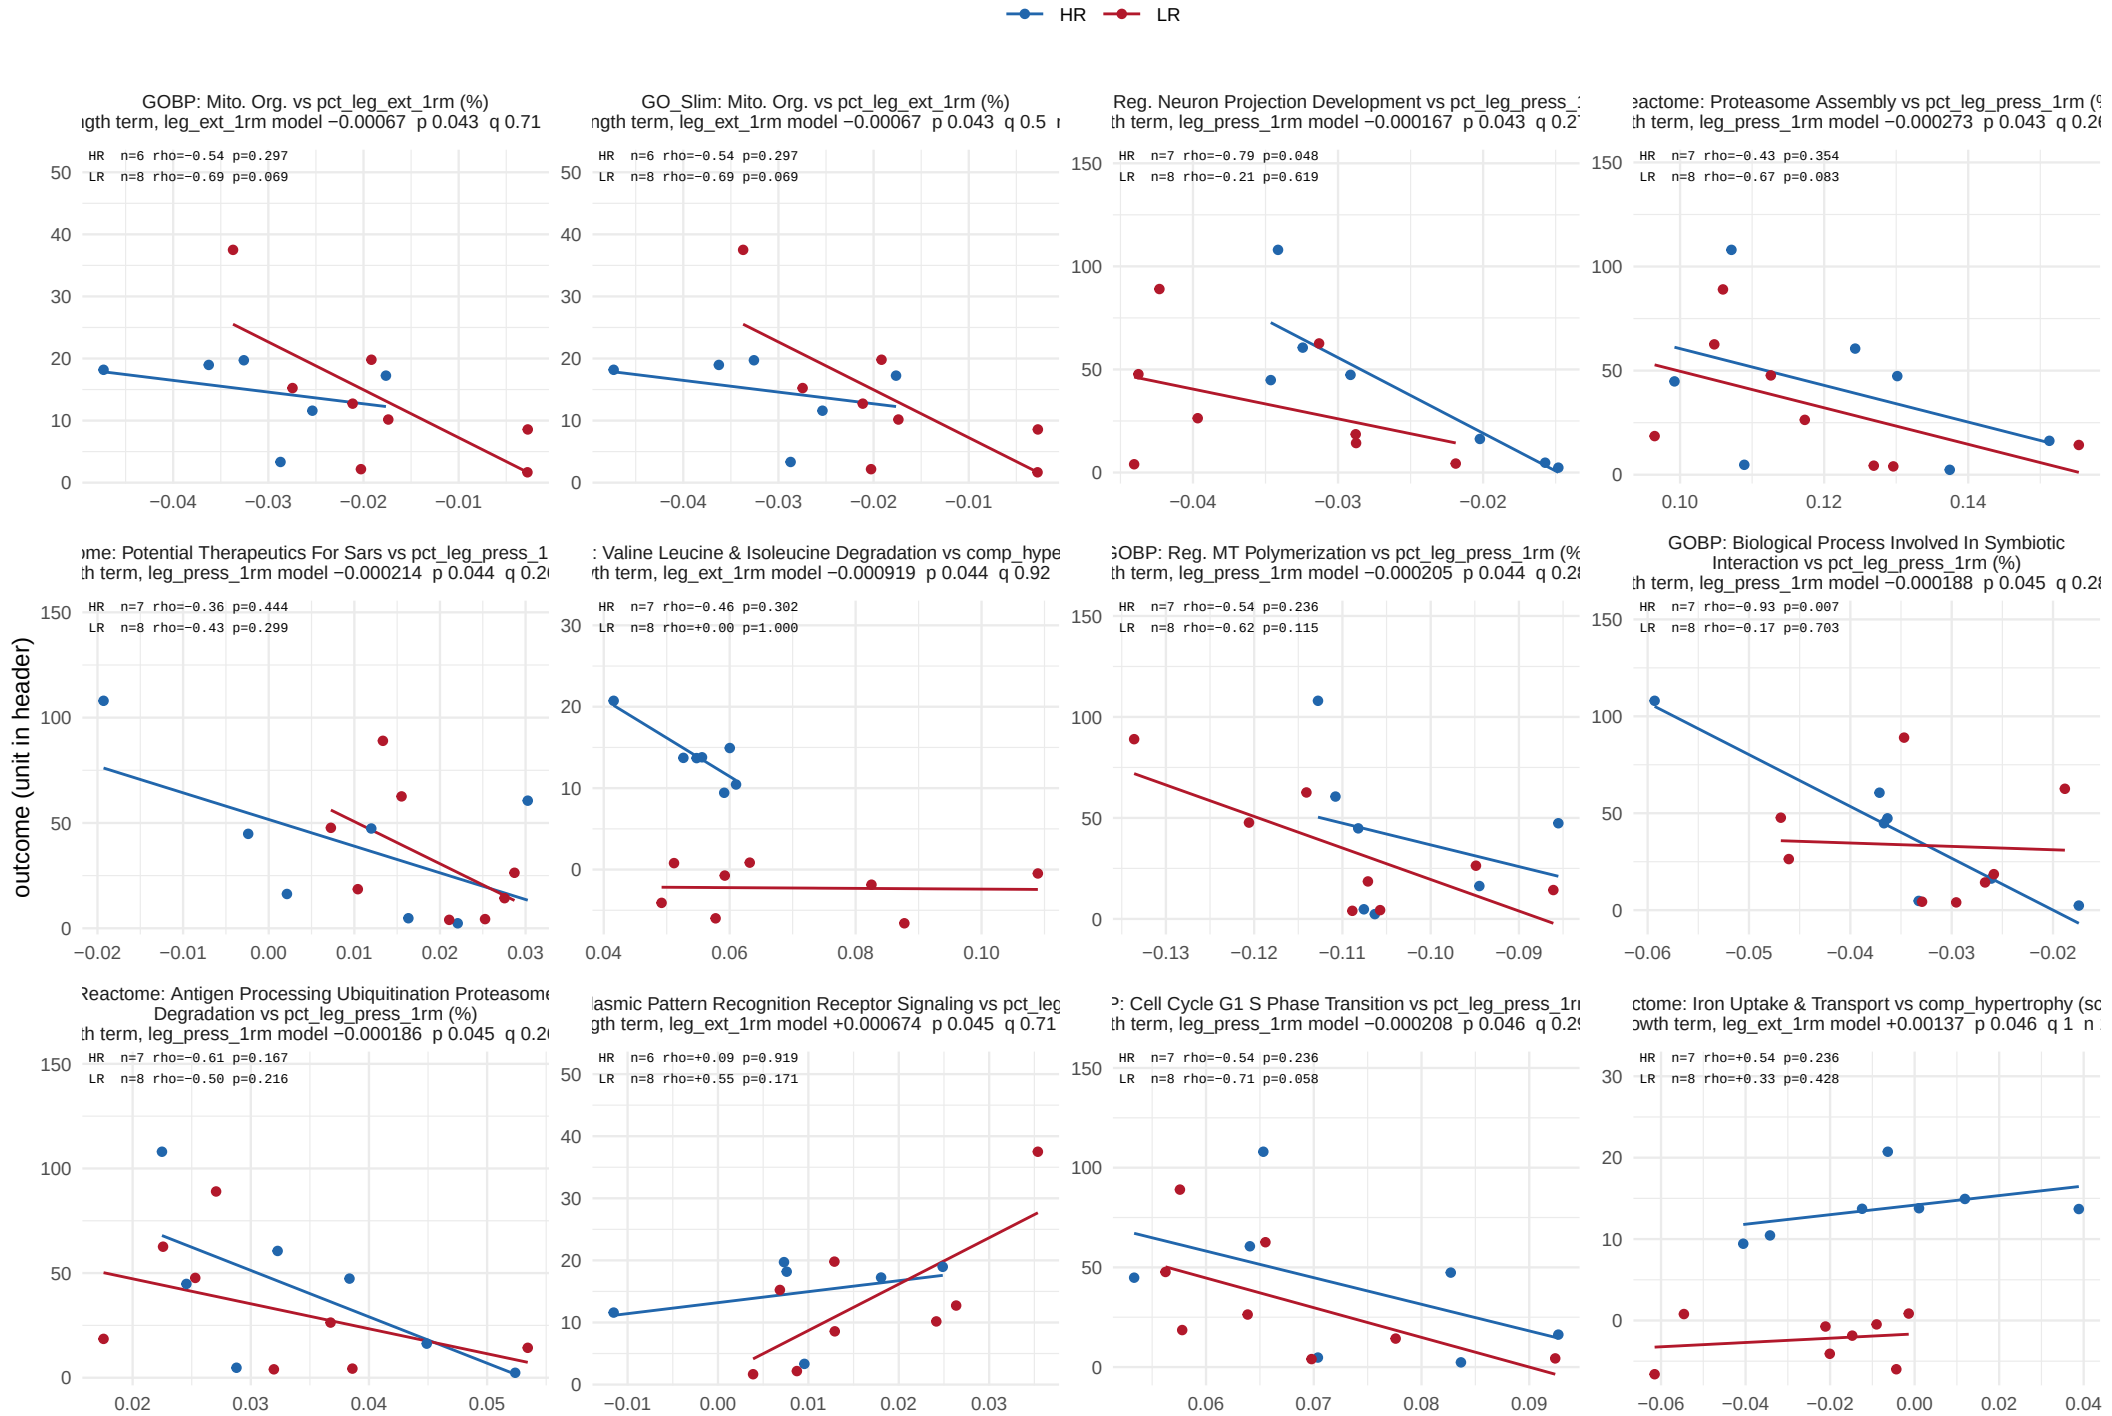


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

## Two predictor, baseline window


410 of 5512 feature−outcome pairs at p < 0.05, 20 at BH < 0.05. Page 33 of 35.

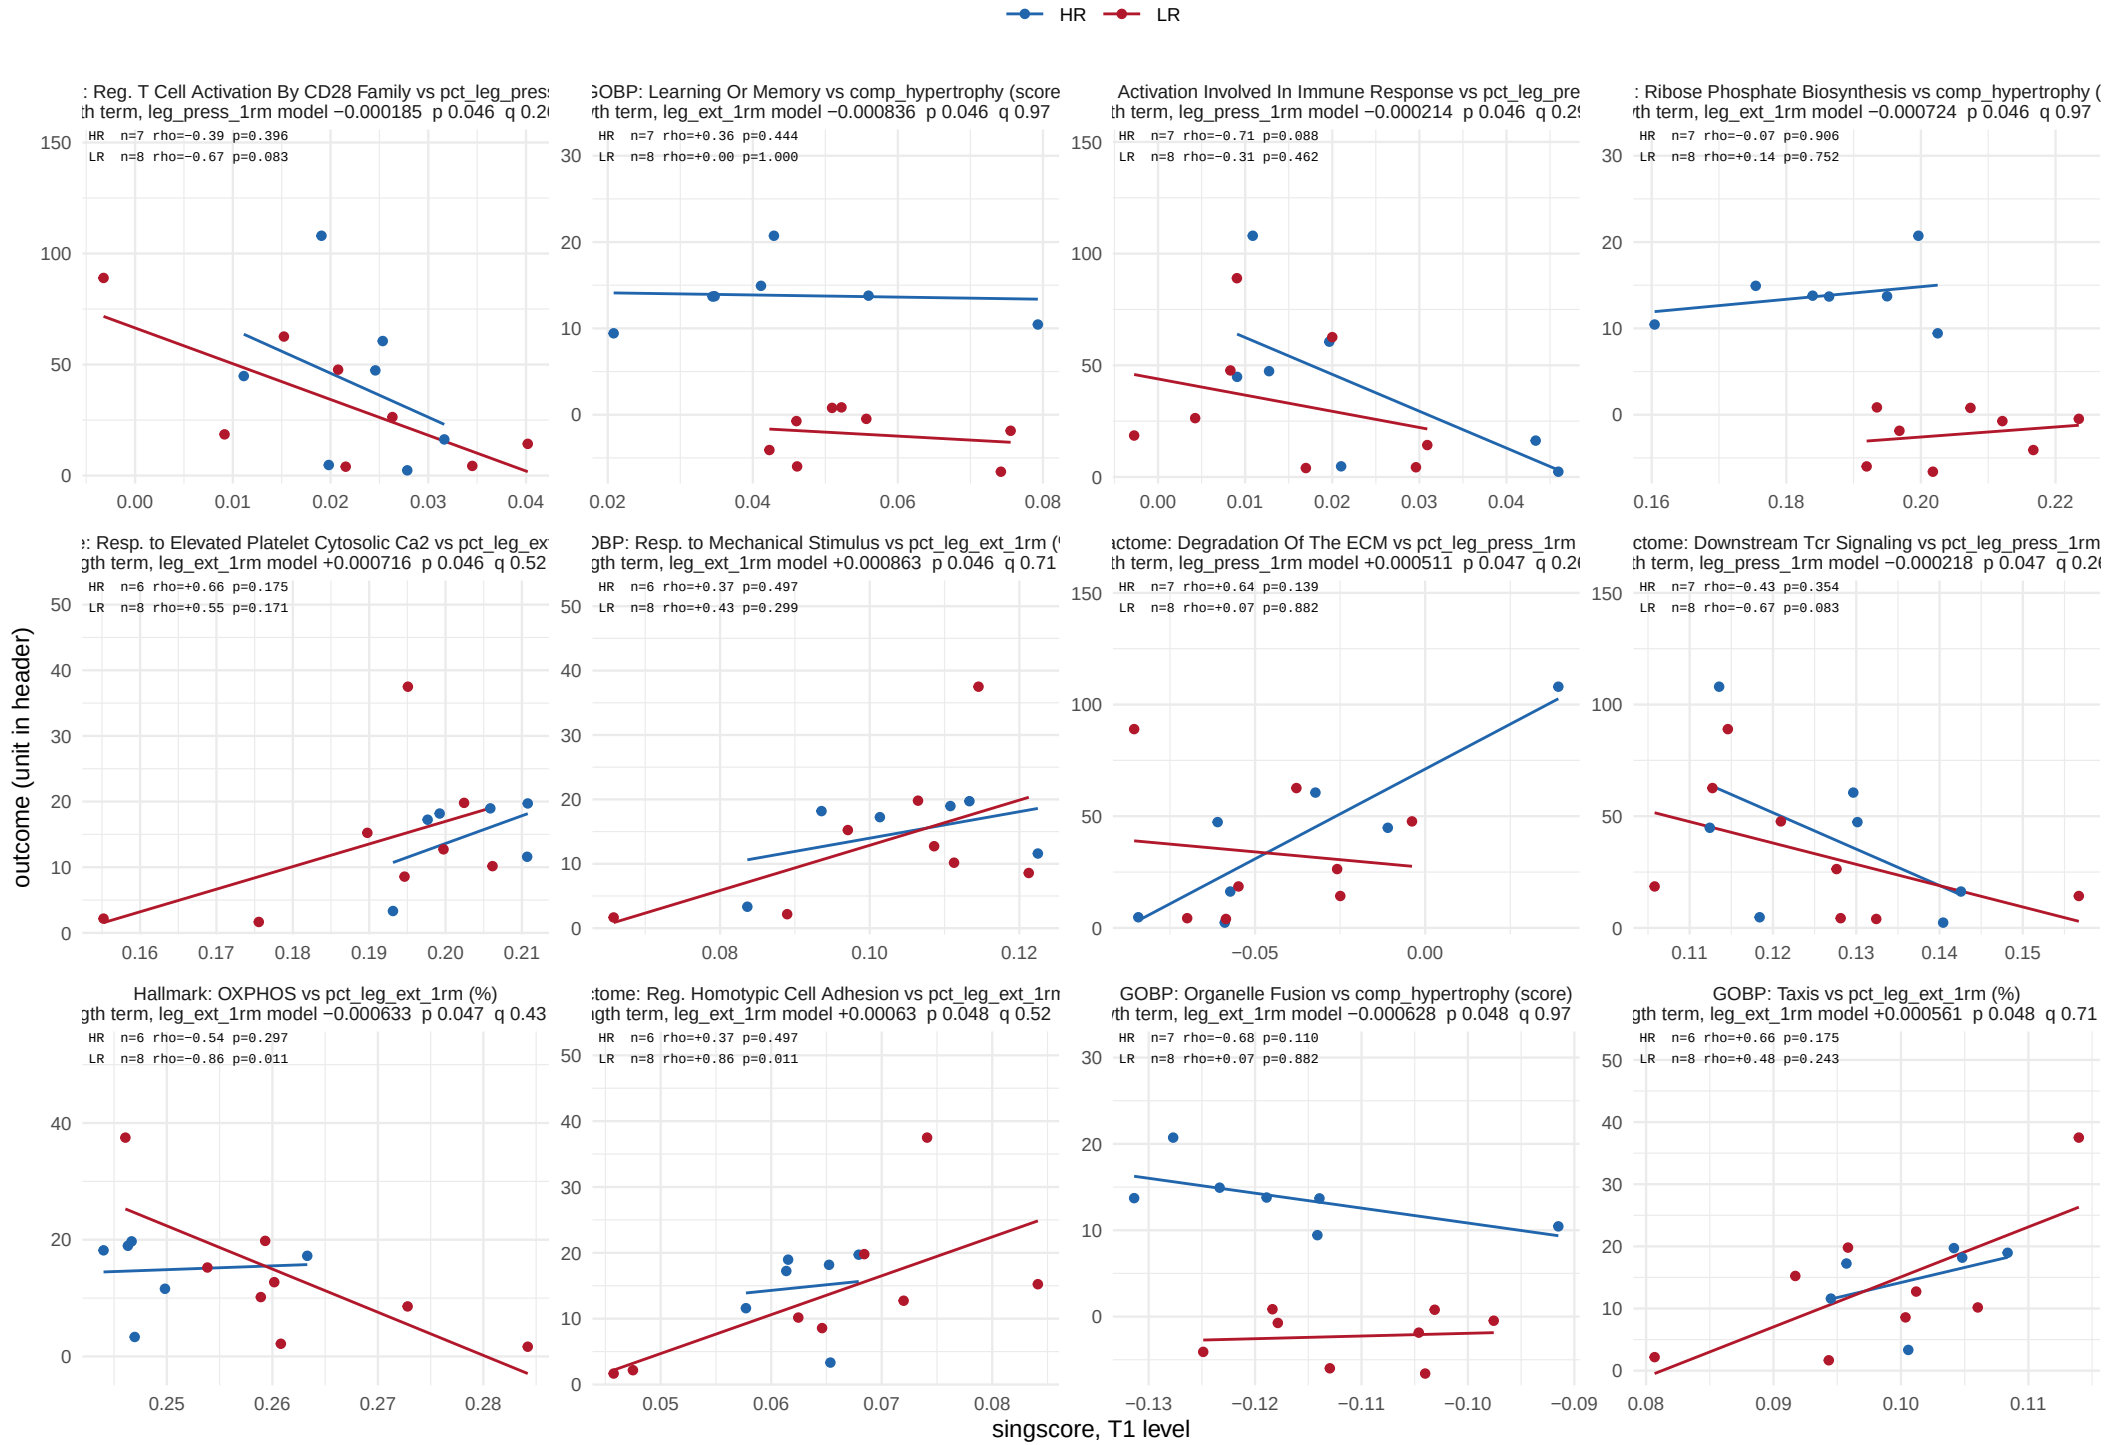


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

## Two predictor, baseline window


410 of 5512 feature−outcome pairs at p < 0.05, 20 at BH < 0.05. Page 34 of 35.

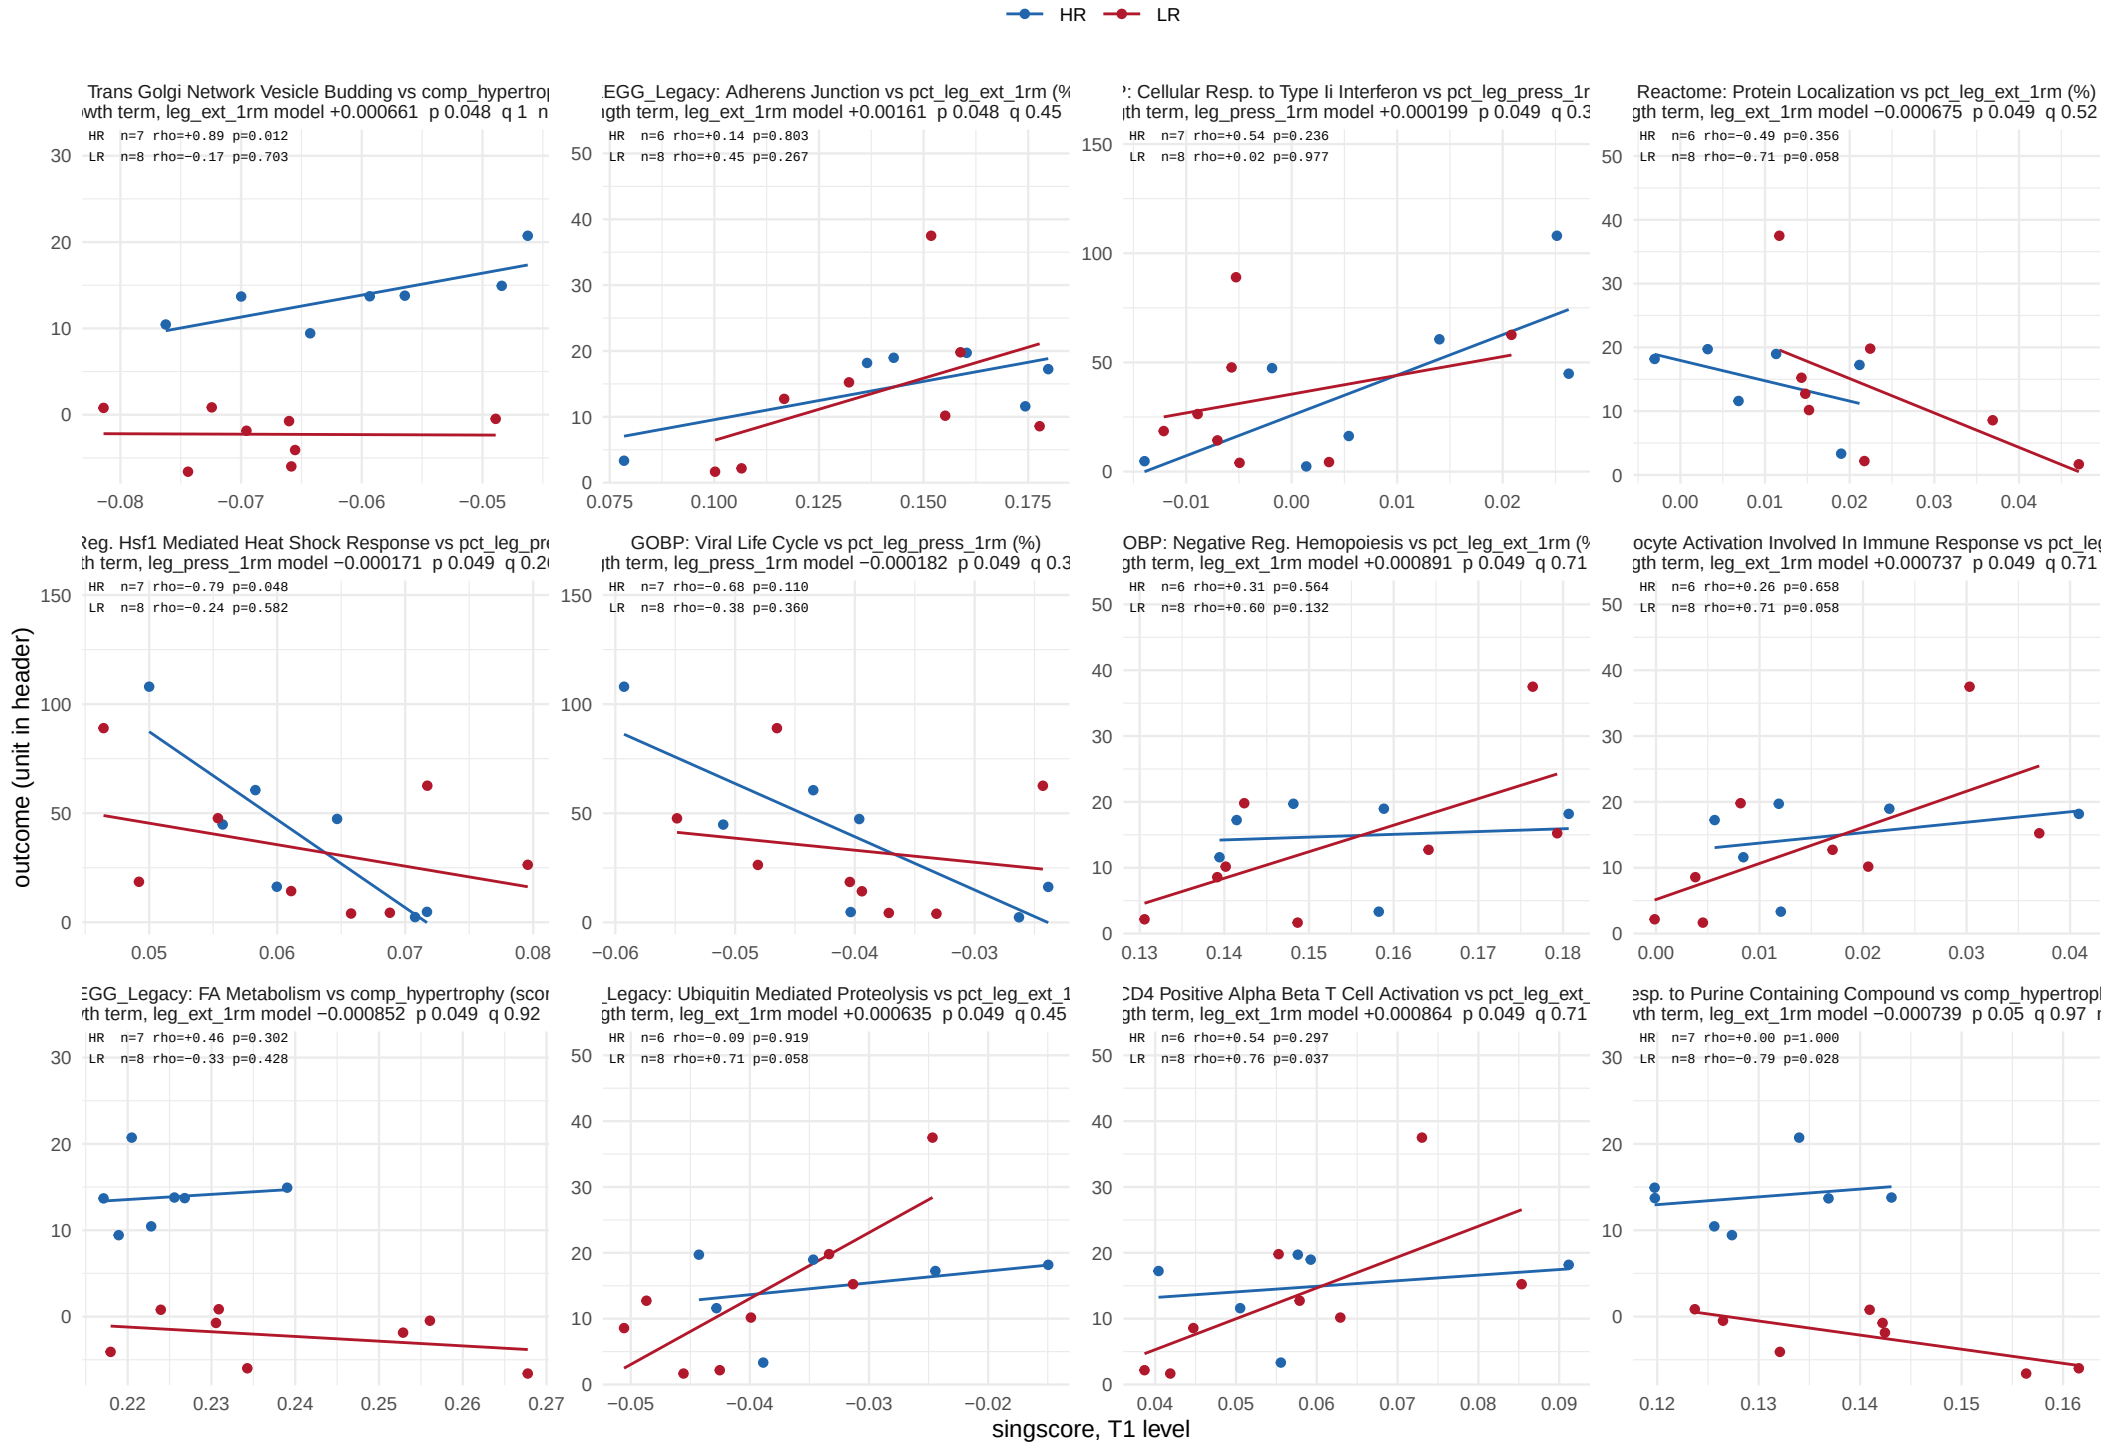


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

## Two predictor, baseline window

410 of 5512 feature−outcome pairs at p < 0.05, 20 at BH < 0.05. Page 35 of 35.

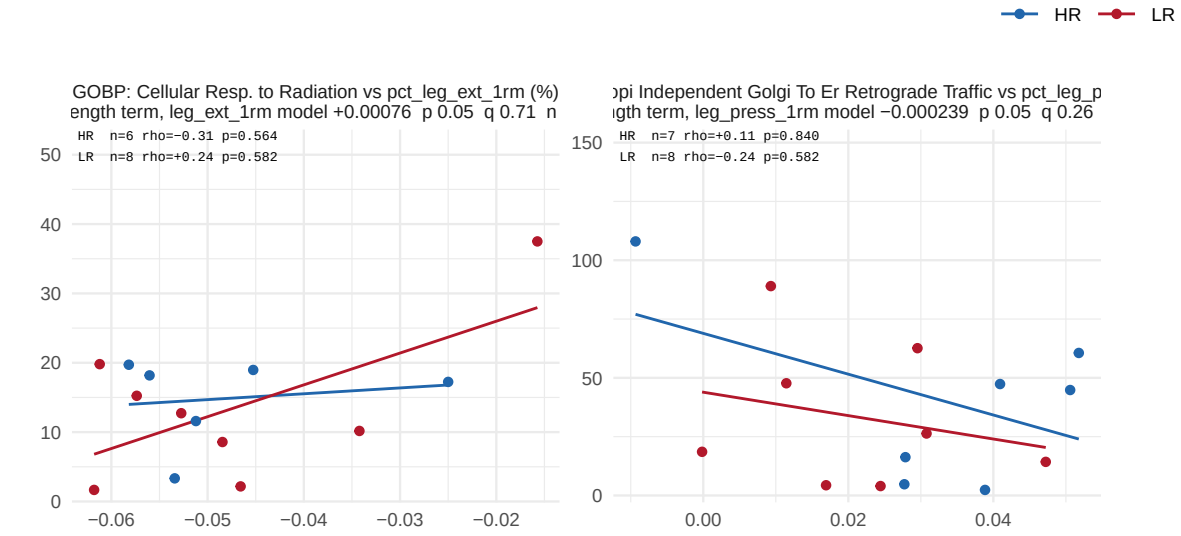



outcome (unit in header)

singscore, T1 level

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

## Two predictor, acute window


334 of 5512 feature−outcome pairs at p < 0.05, 6 at BH < 0.05. Page 1 of 28.

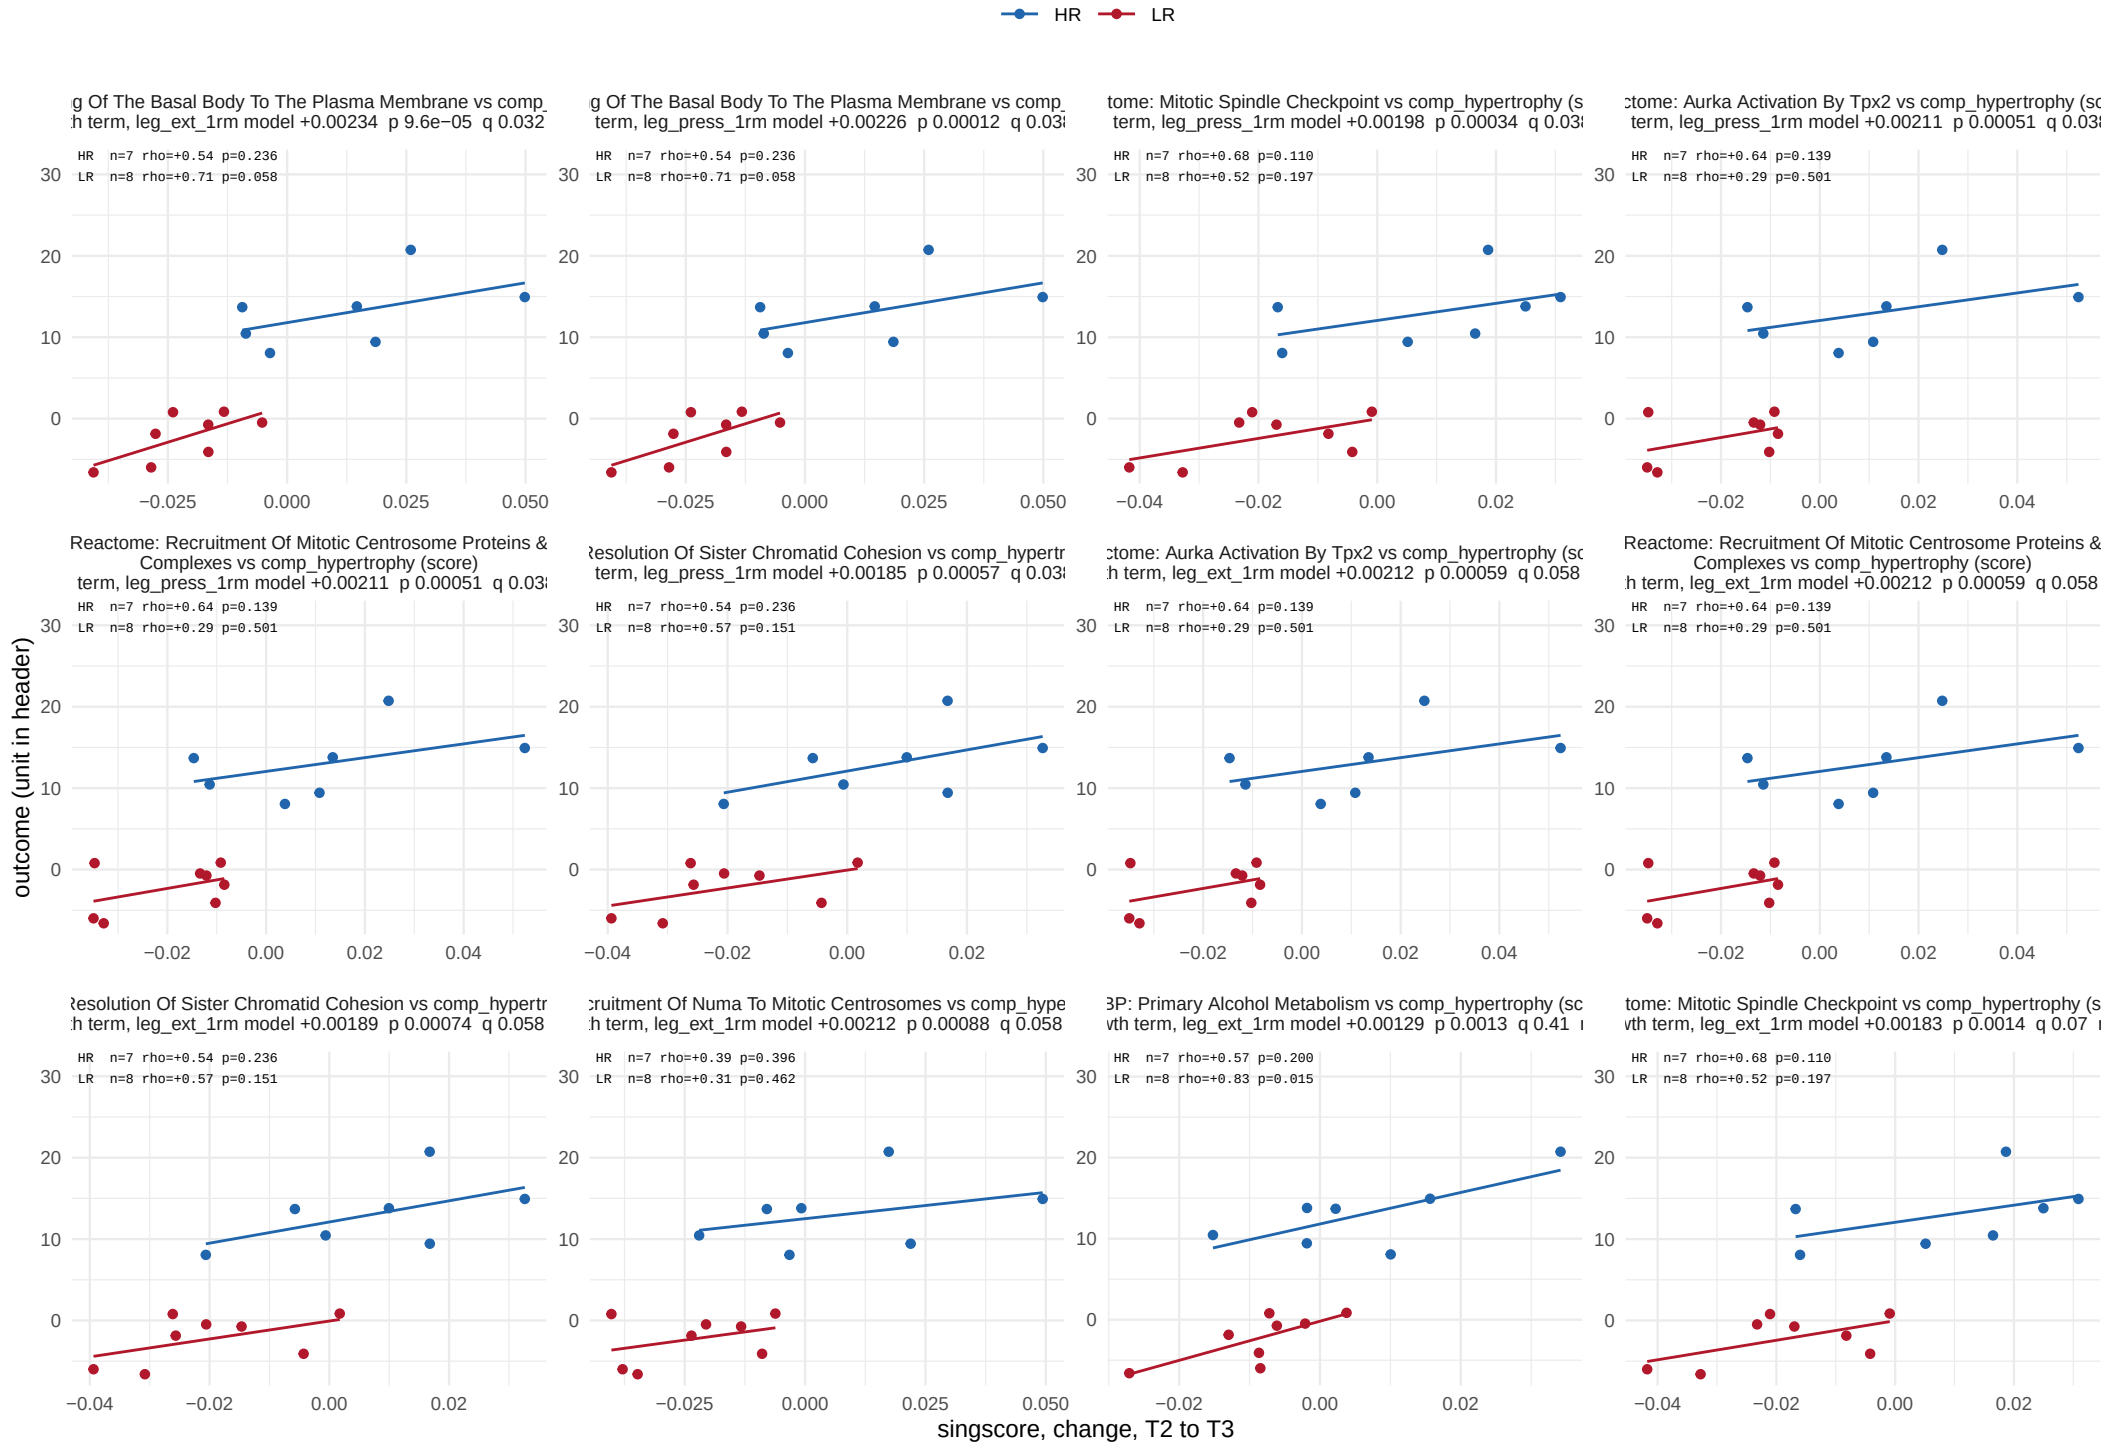


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

## Two predictor, acute window


334 of 5512 feature−outcome pairs at p < 0.05, 6 at BH < 0.05. Page 2 of 28.

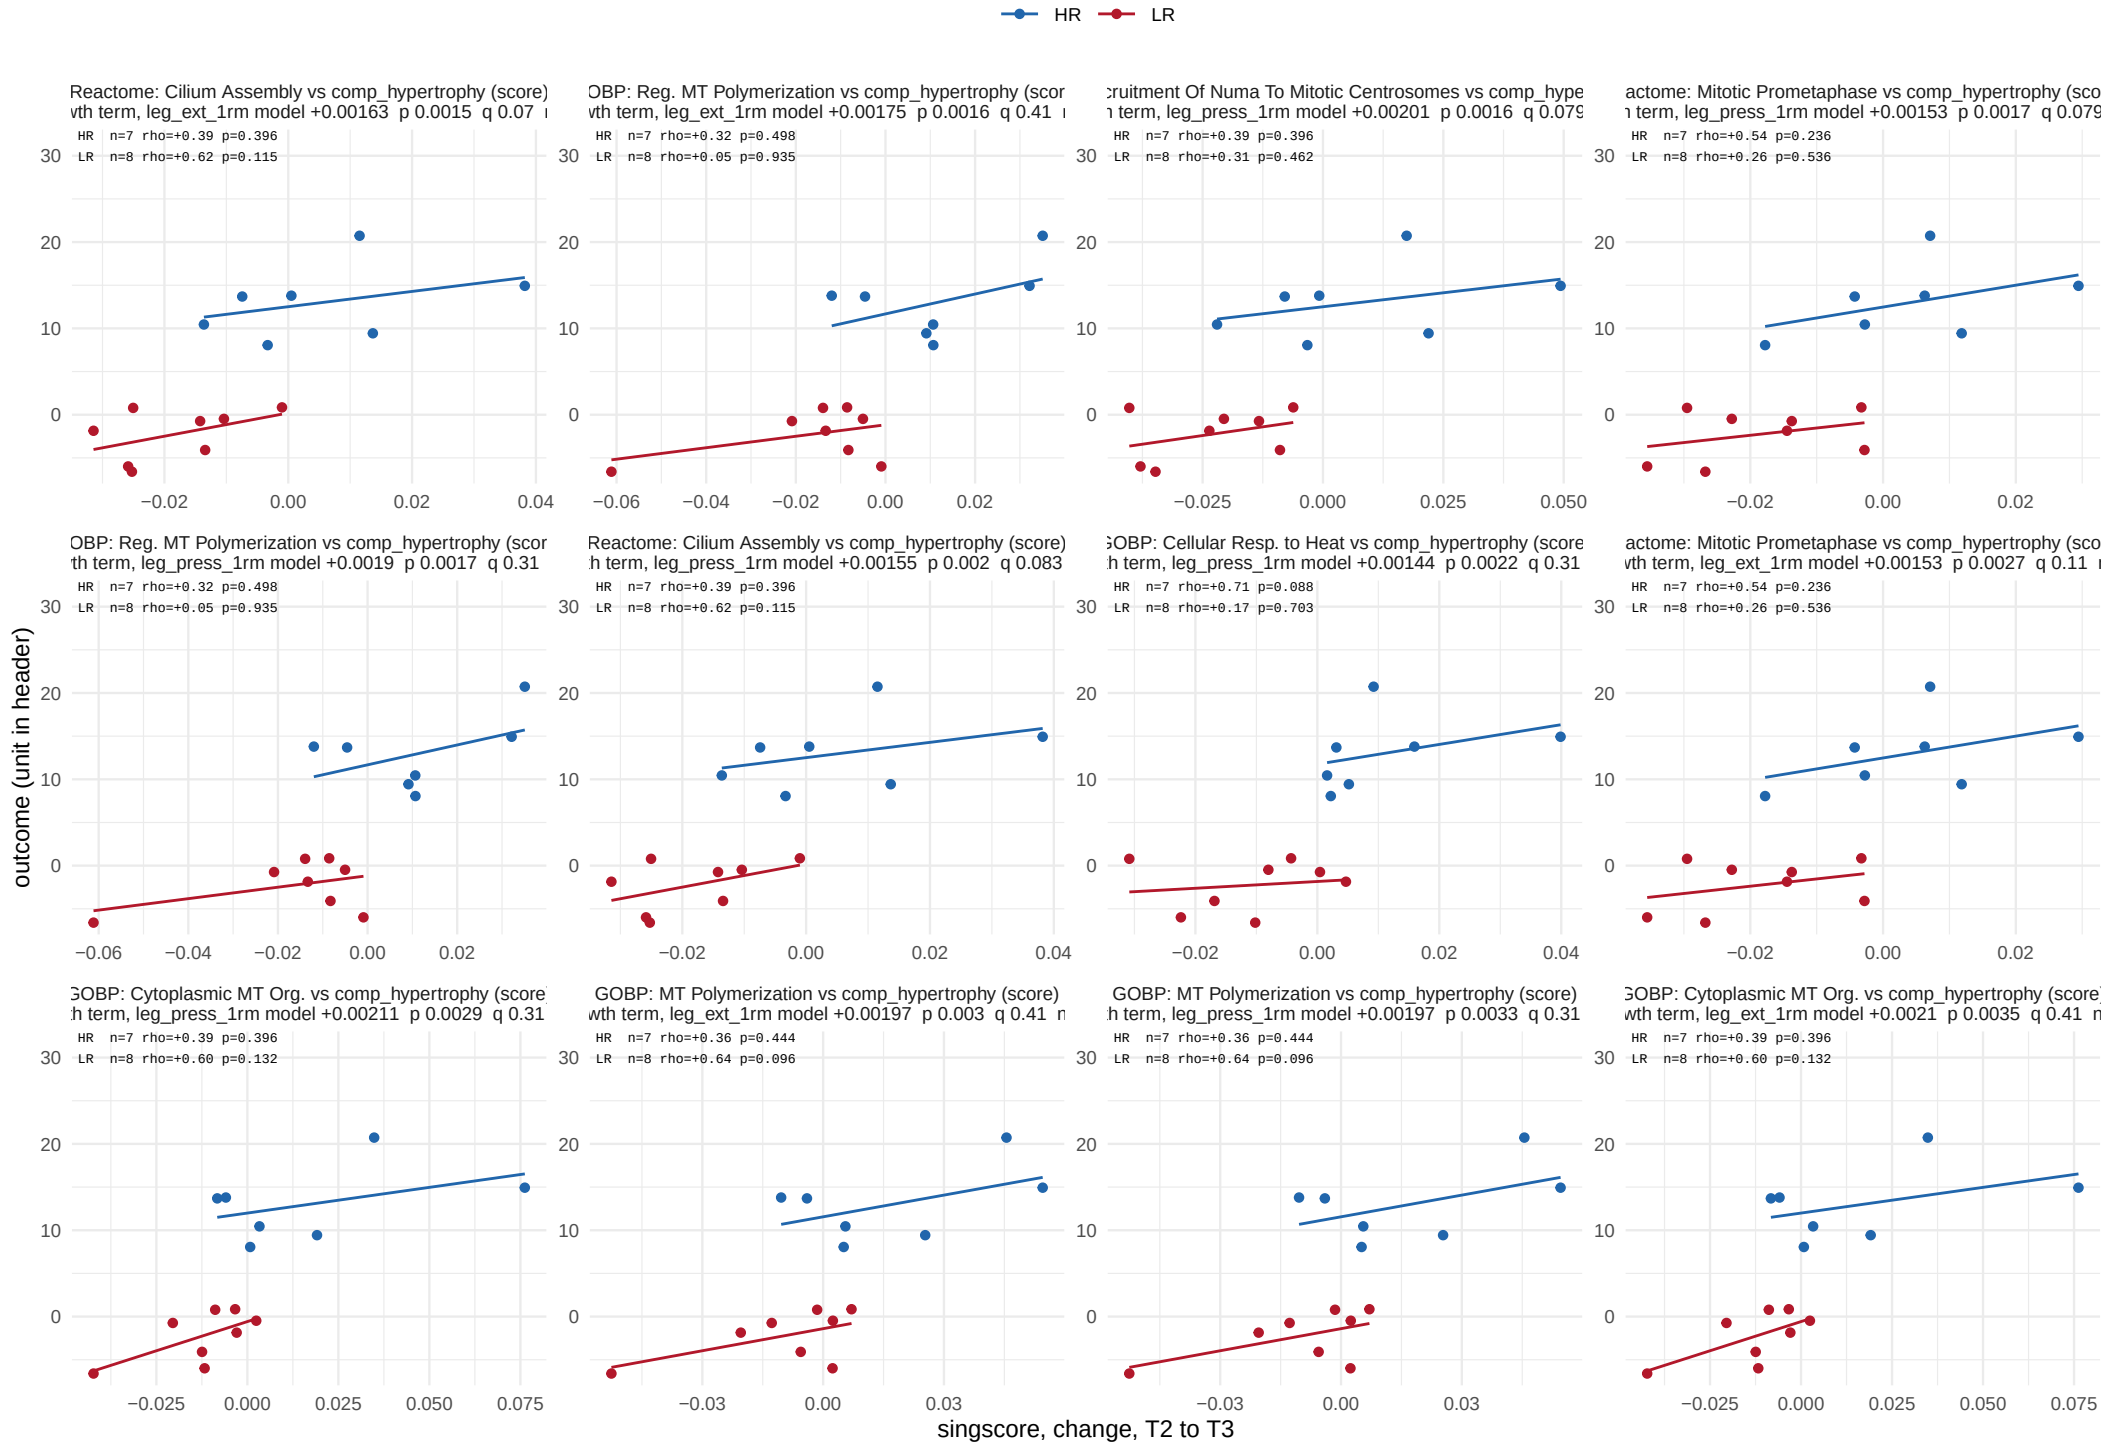


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

## Two predictor, acute window


334 of 5512 feature−outcome pairs at p < 0.05, 6 at BH < 0.05. Page 3 of 28.

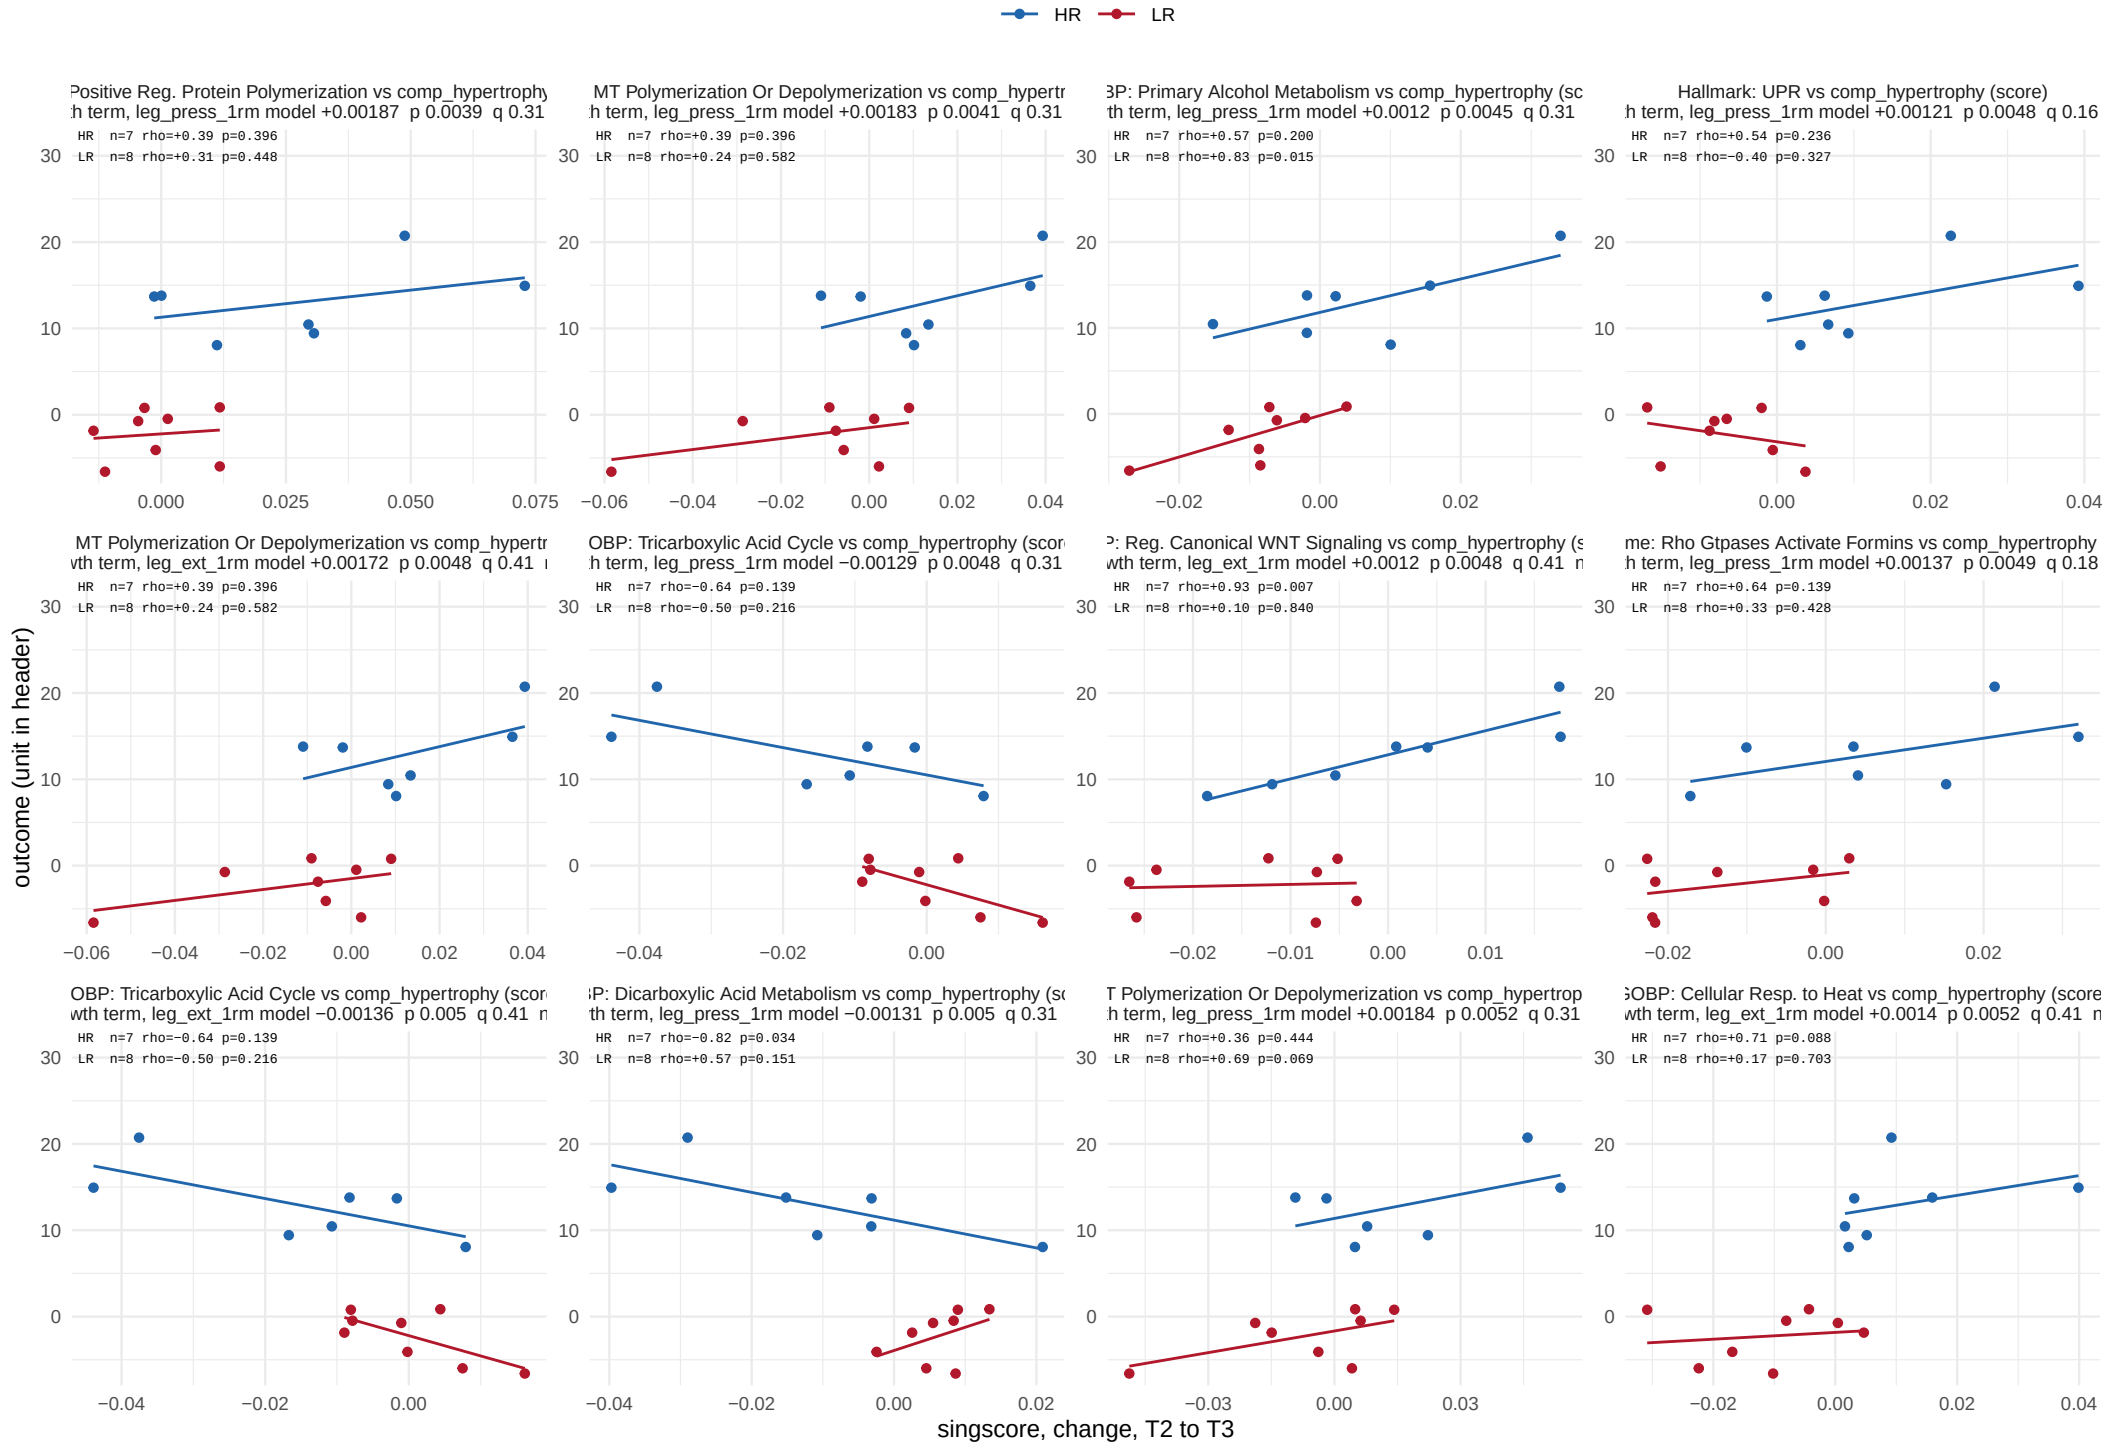


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

## Two predictor, acute window


334 of 5512 feature−outcome pairs at p < 0.05, 6 at BH < 0.05. Page 4 of 28.

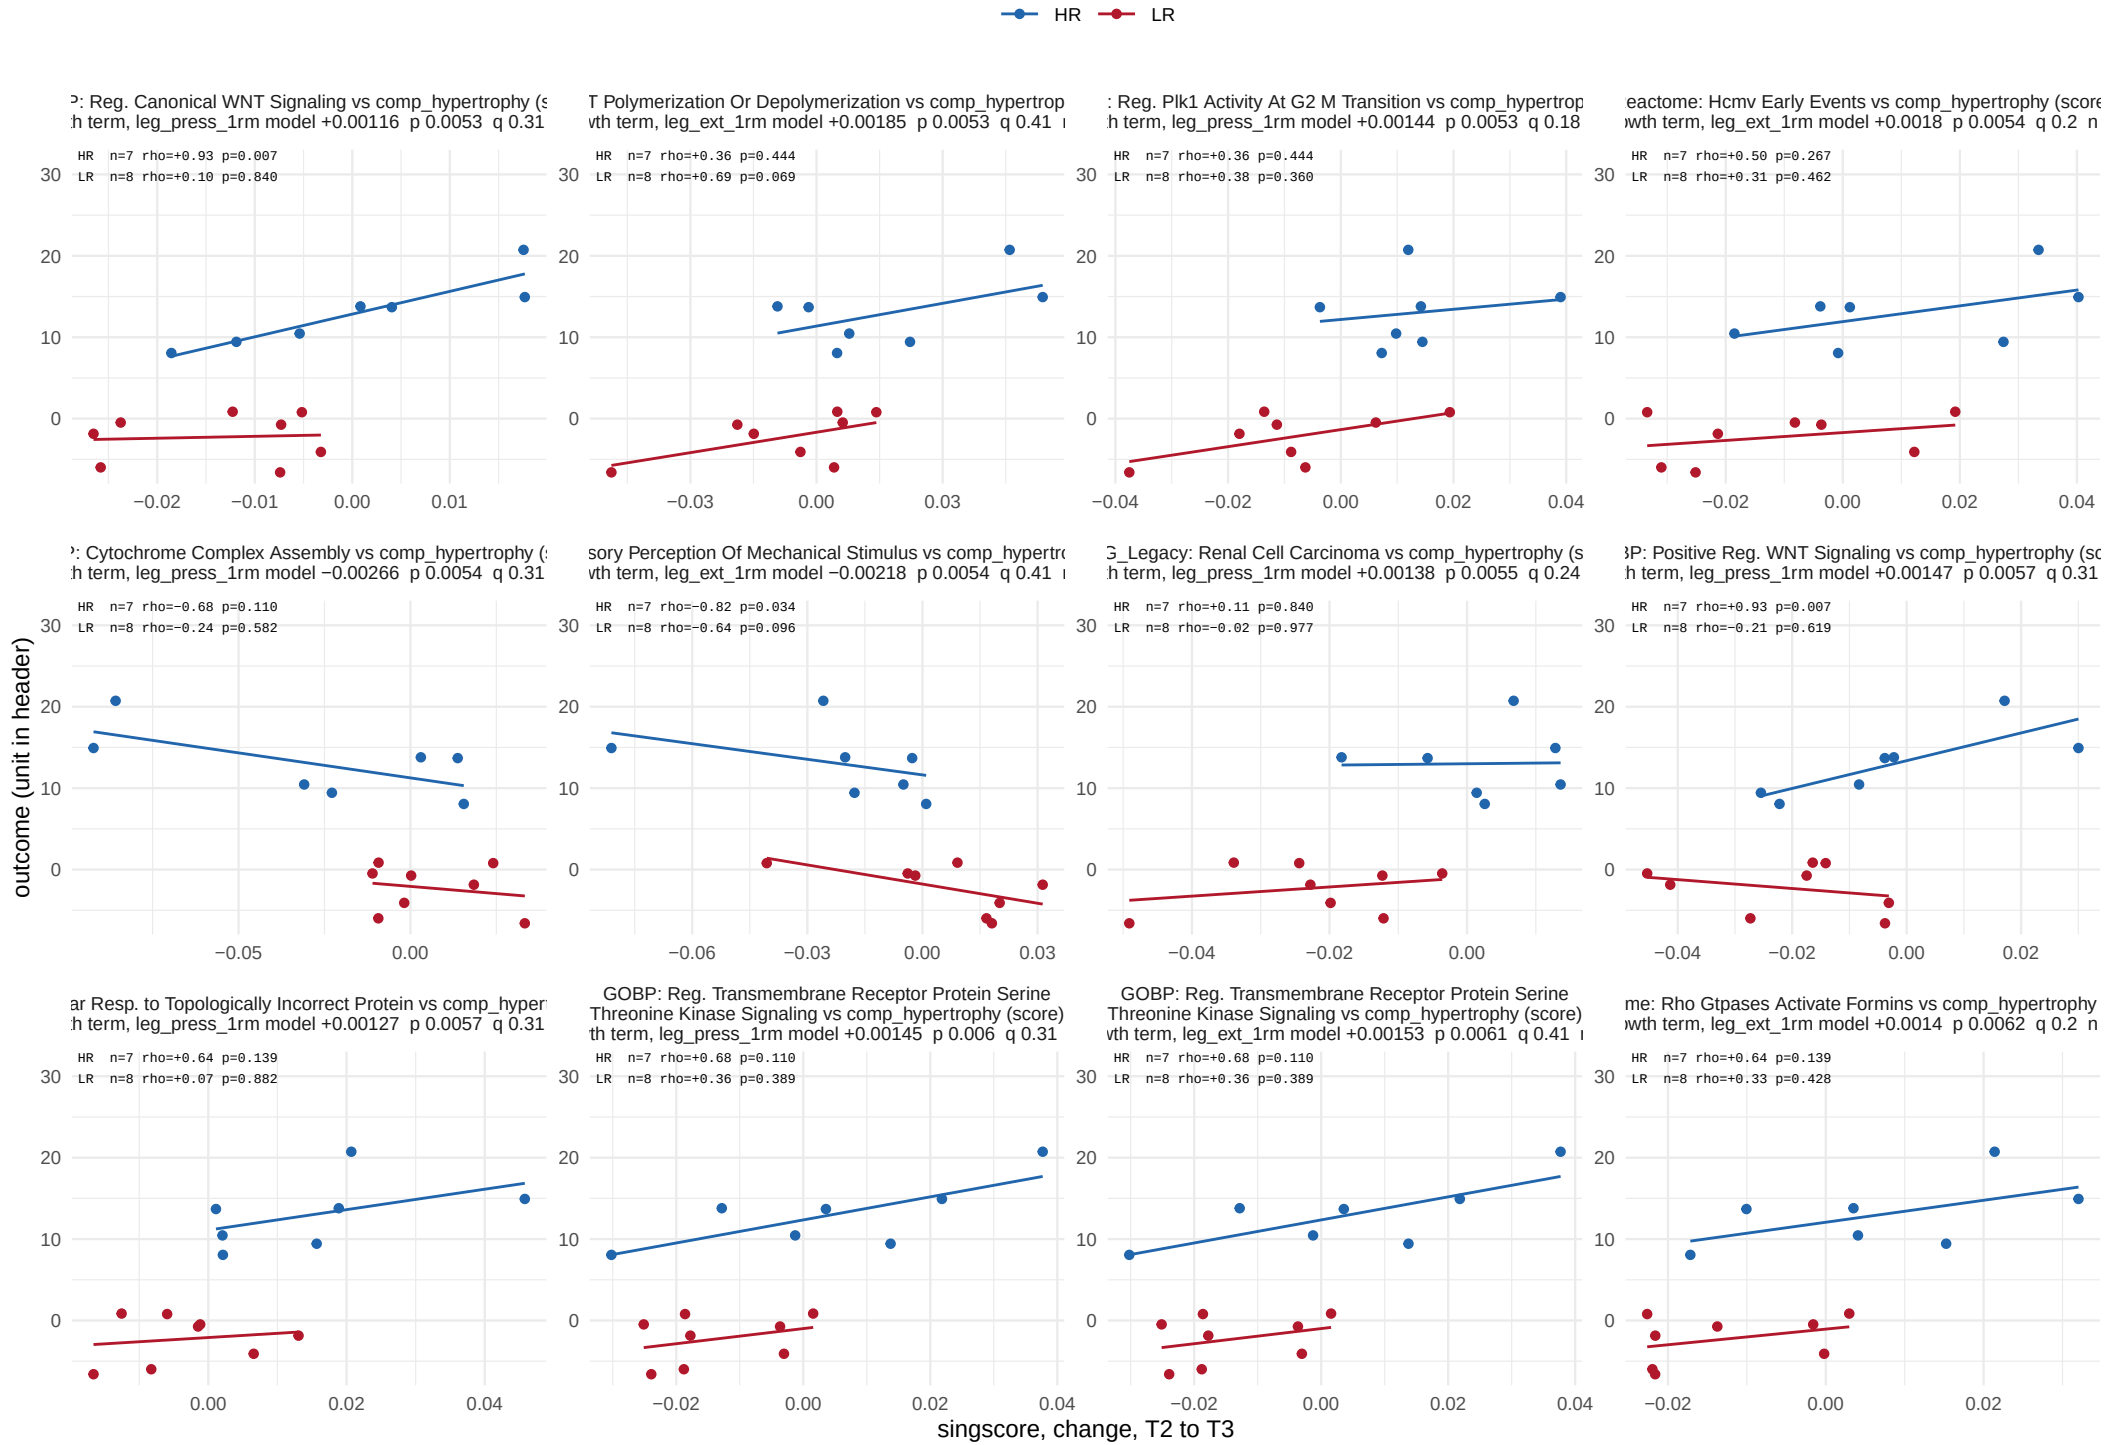


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

## Two predictor, acute window


334 of 5512 feature−outcome pairs at p < 0.05, 6 at BH < 0.05. Page 5 of 28.

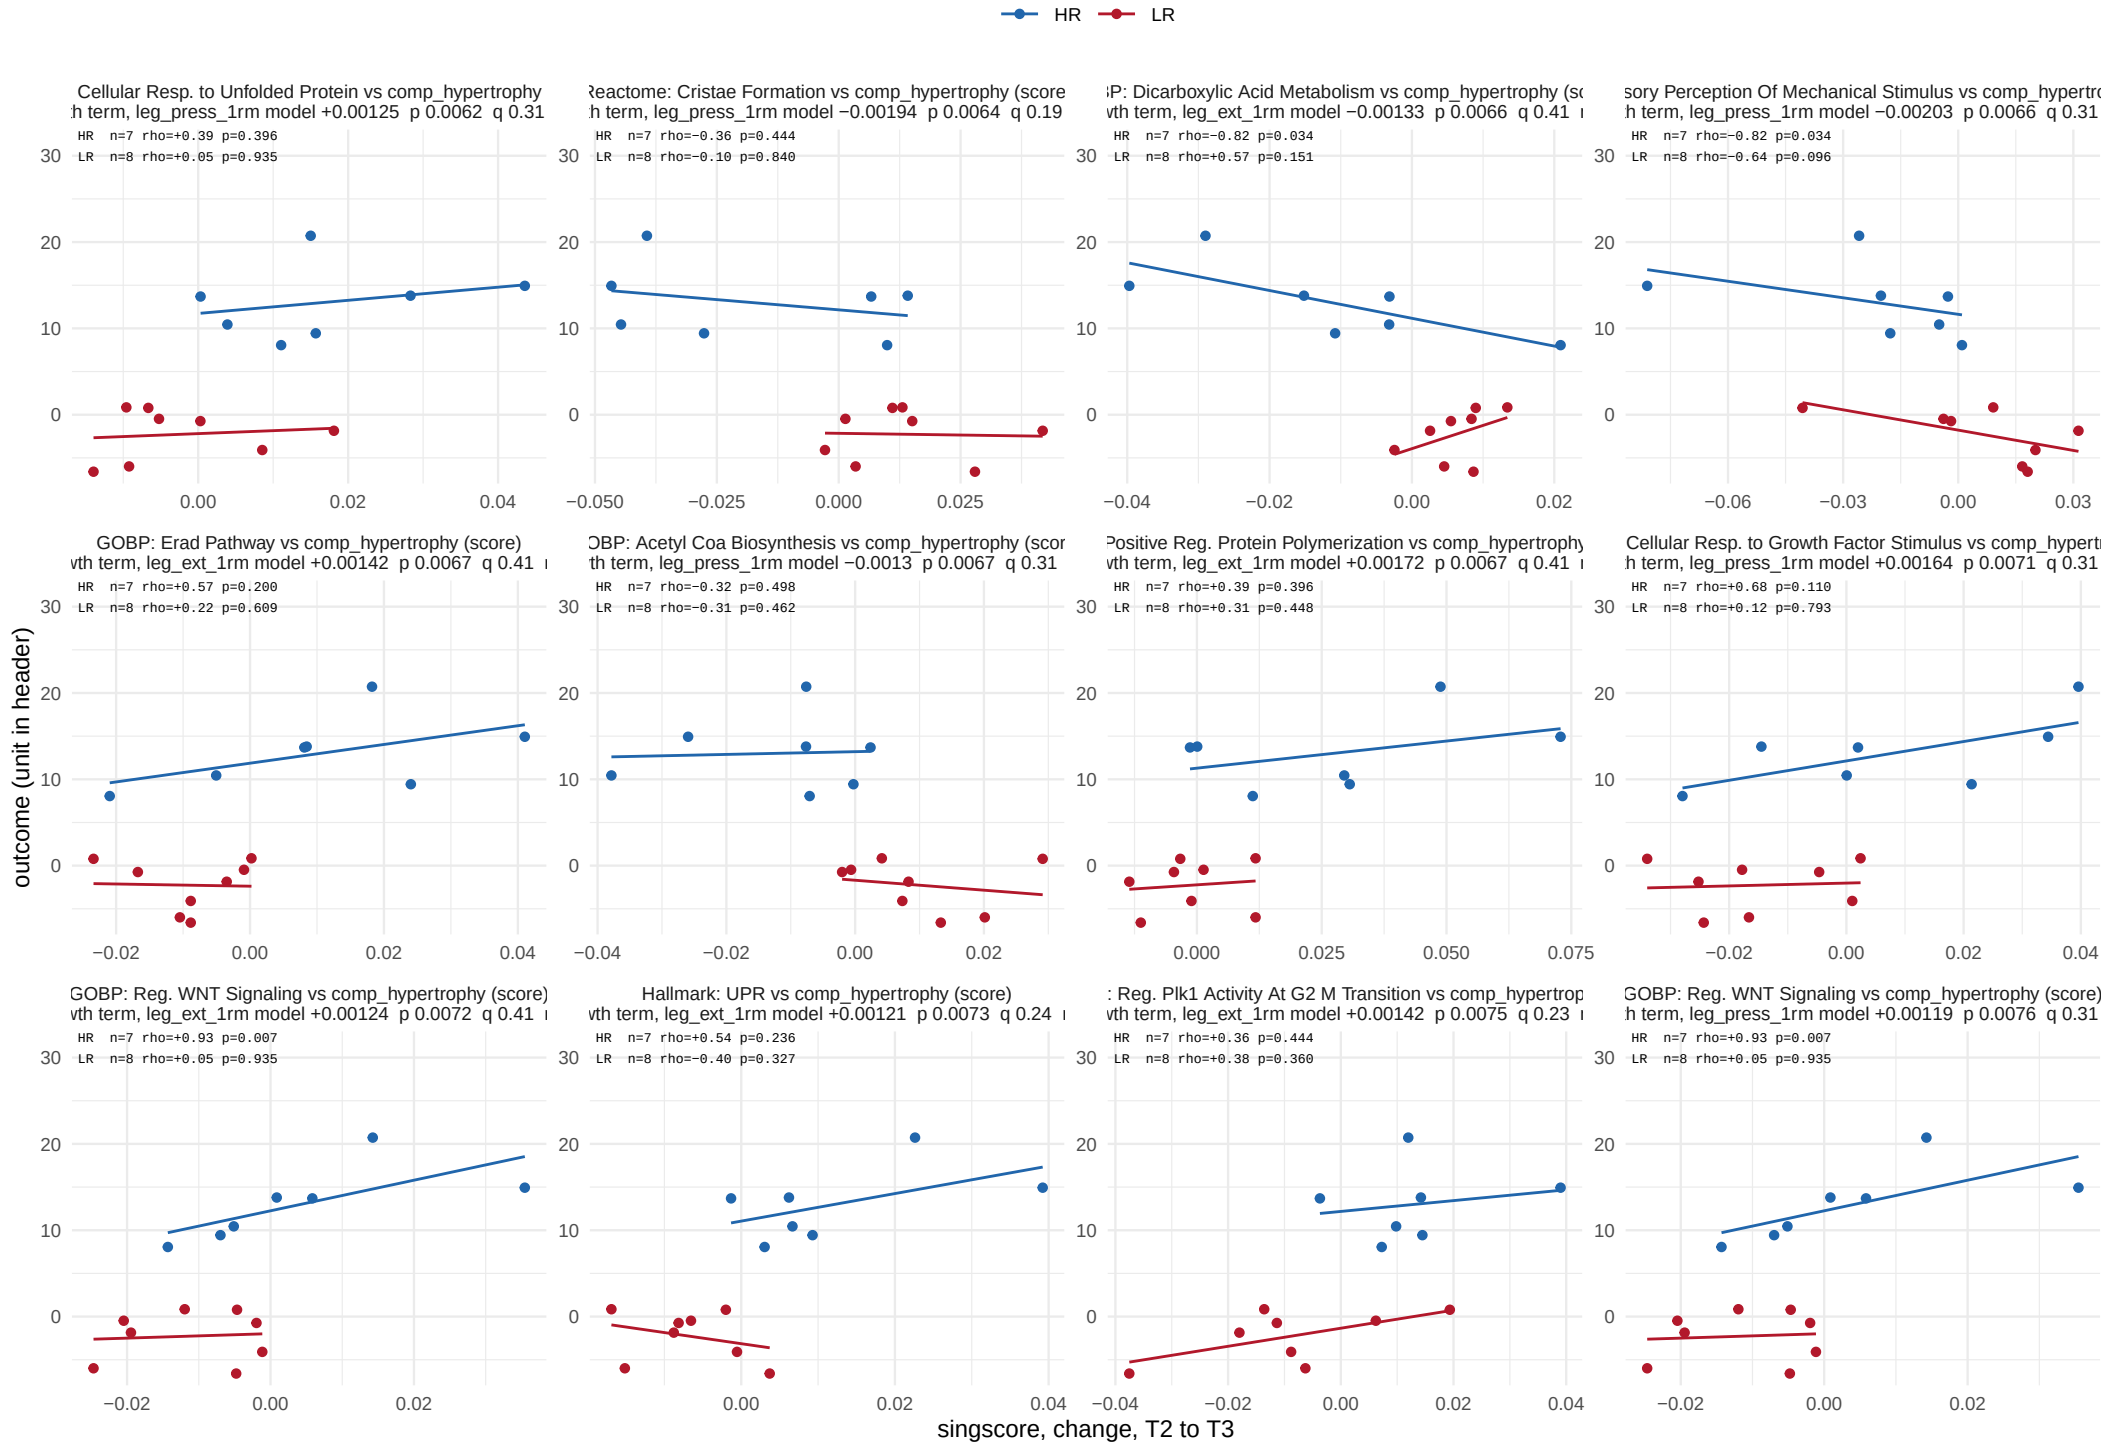


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

## Two predictor, acute window


334 of 5512 feature−outcome pairs at p < 0.05, 6 at BH < 0.05. Page 6 of 28.

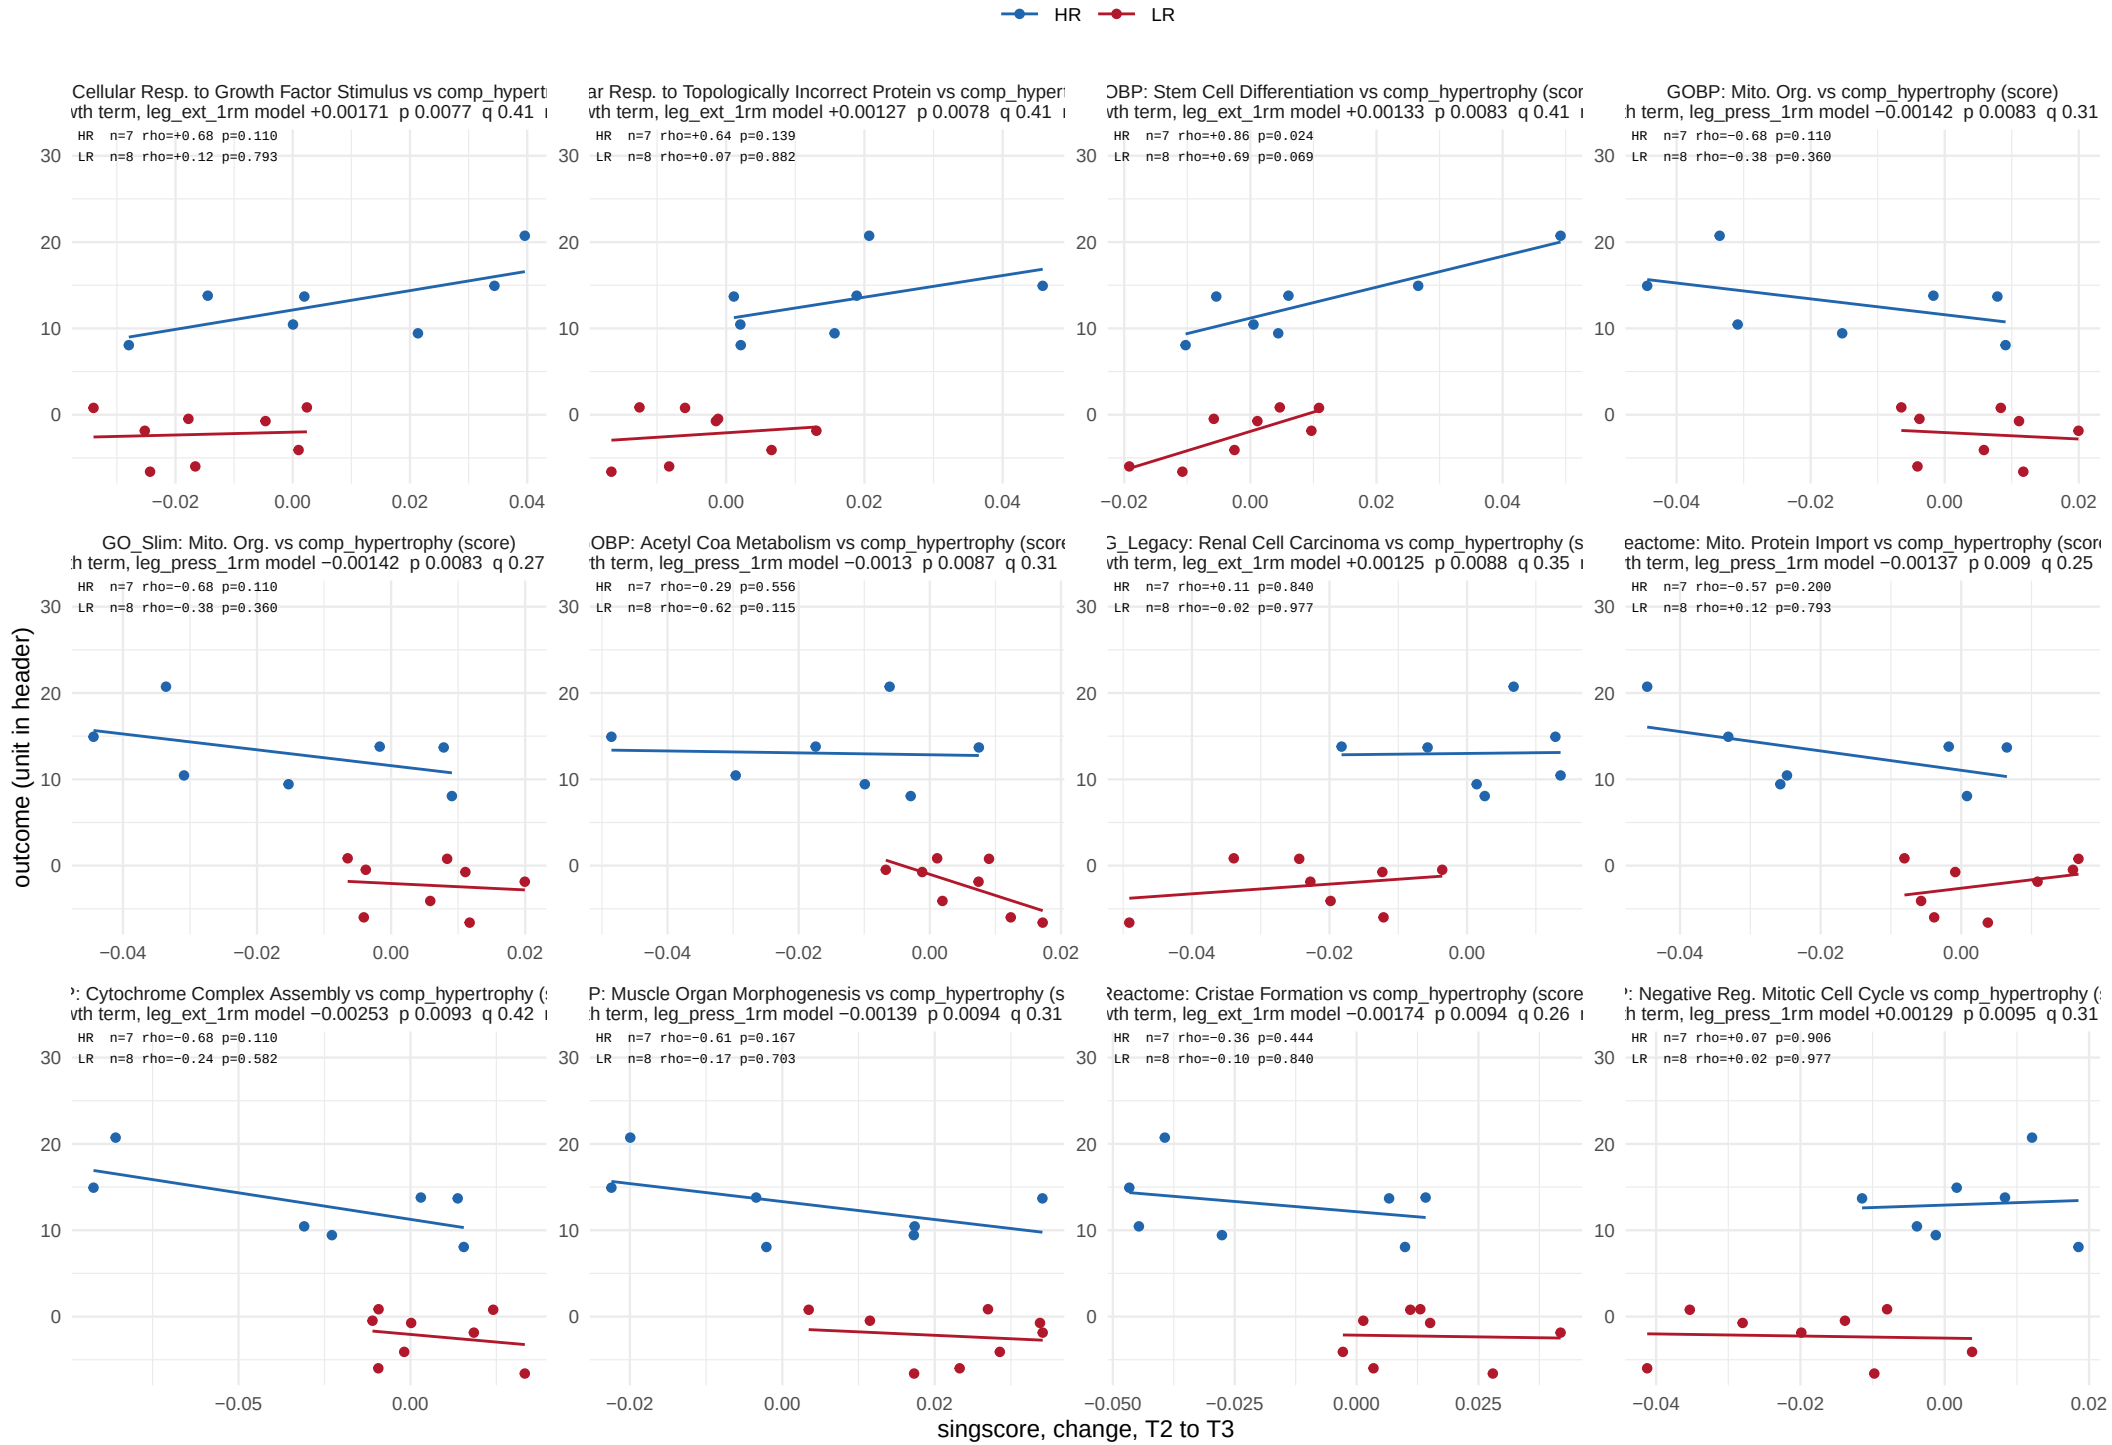


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

## Two predictor, acute window


334 of 5512 feature−outcome pairs at p < 0.05, 6 at BH < 0.05. Page 7 of 28.

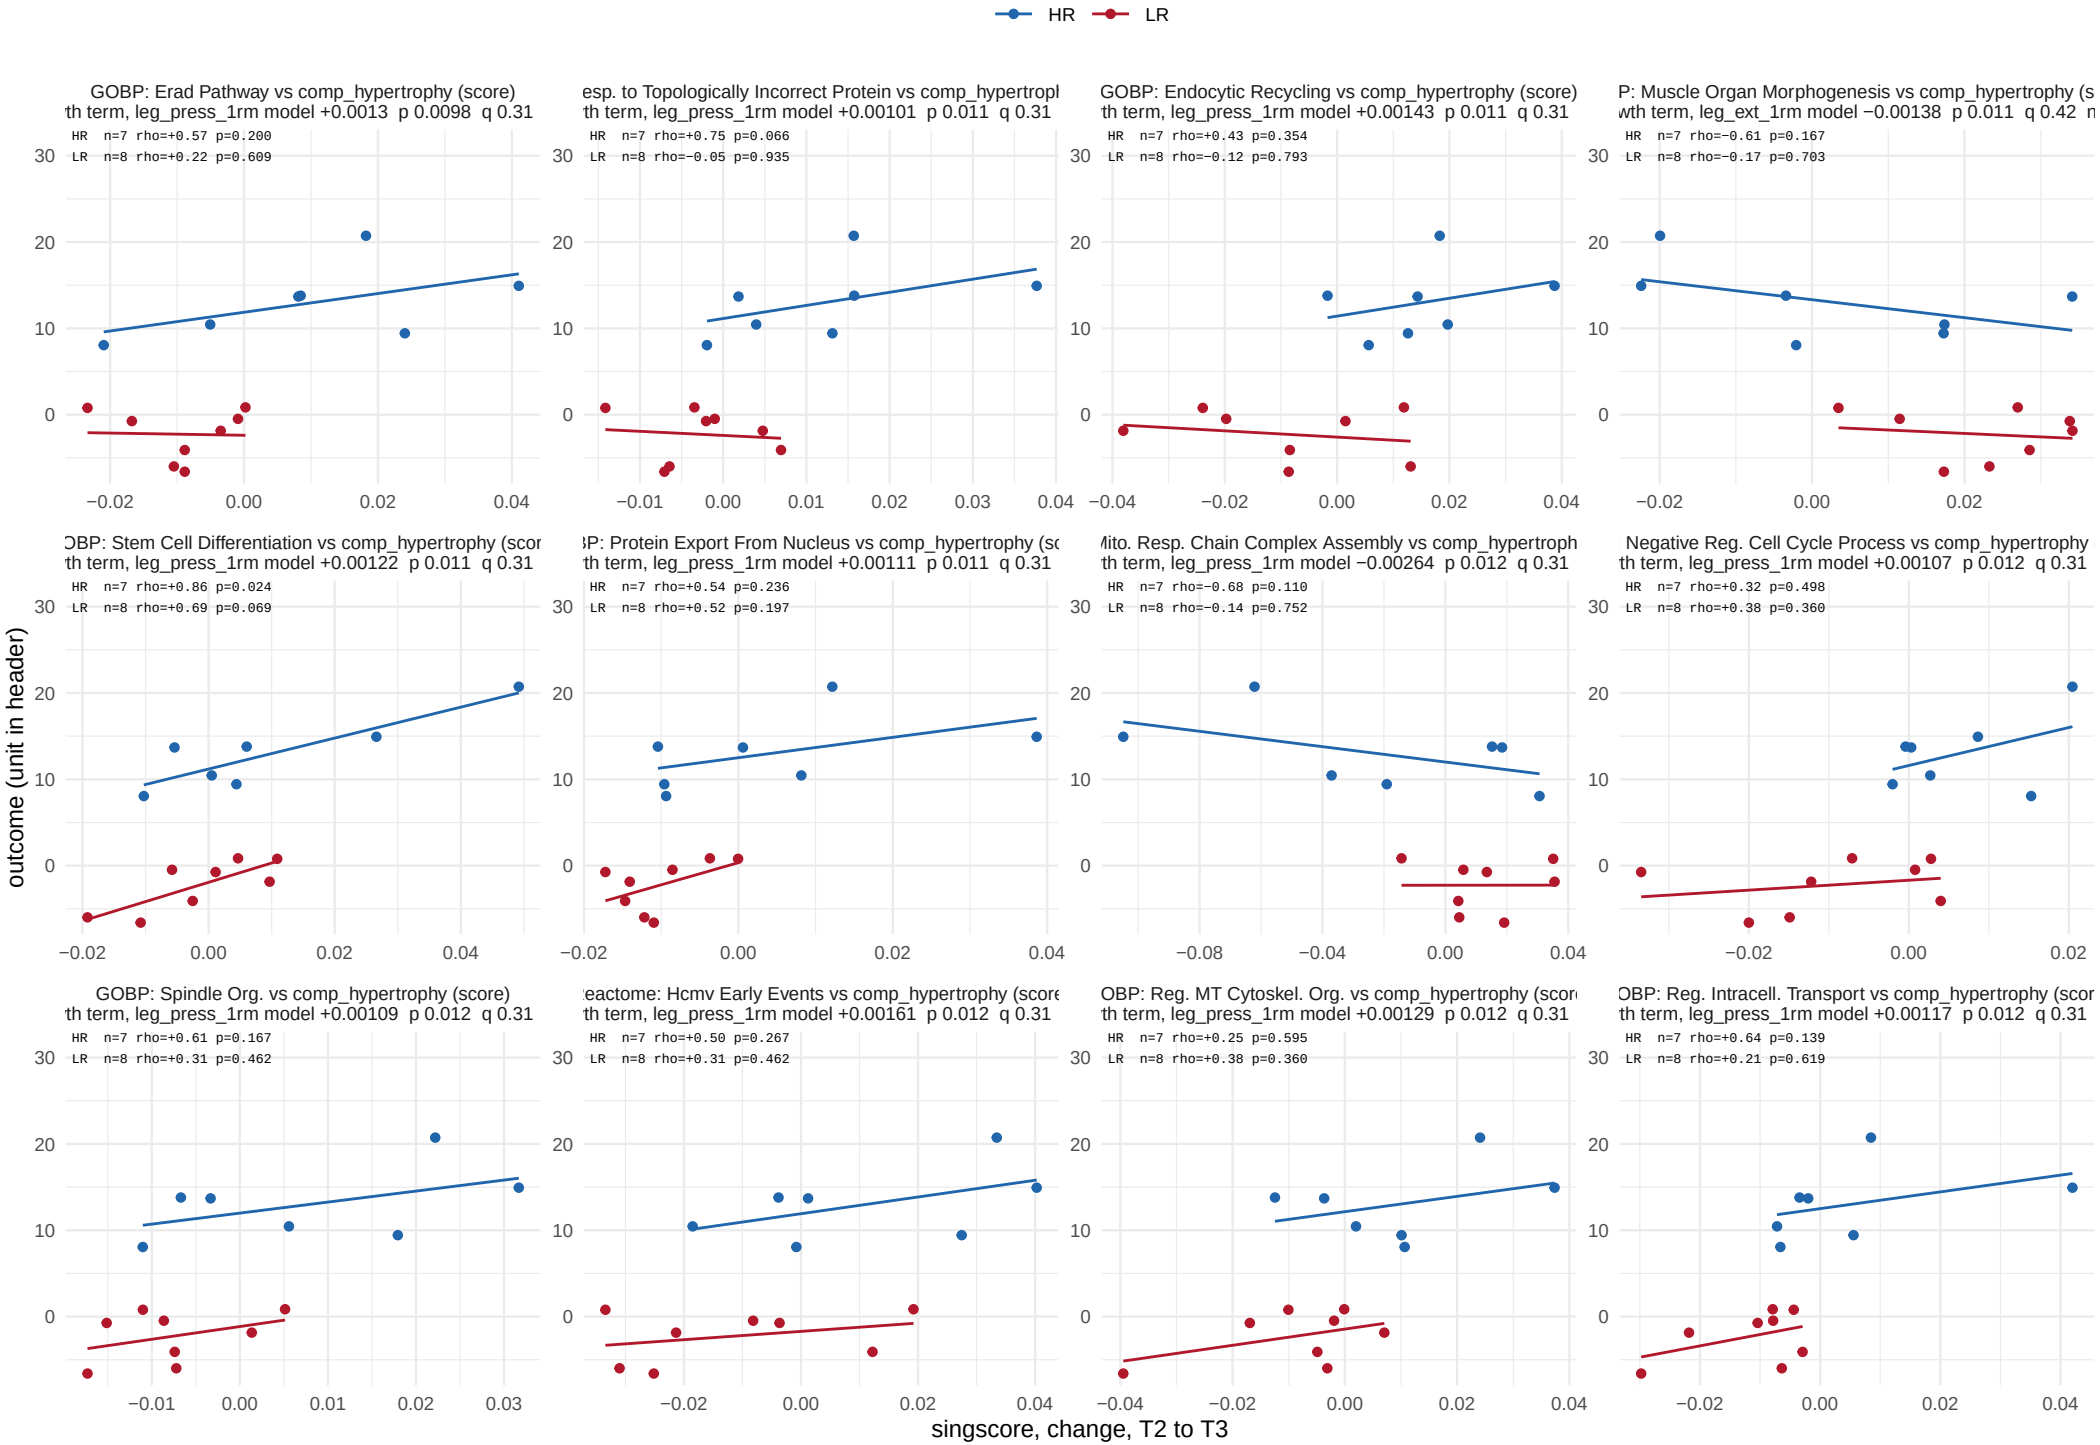


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

## Two predictor, acute window


334 of 5512 feature−outcome pairs at p < 0.05, 6 at BH < 0.05. Page 8 of 28.

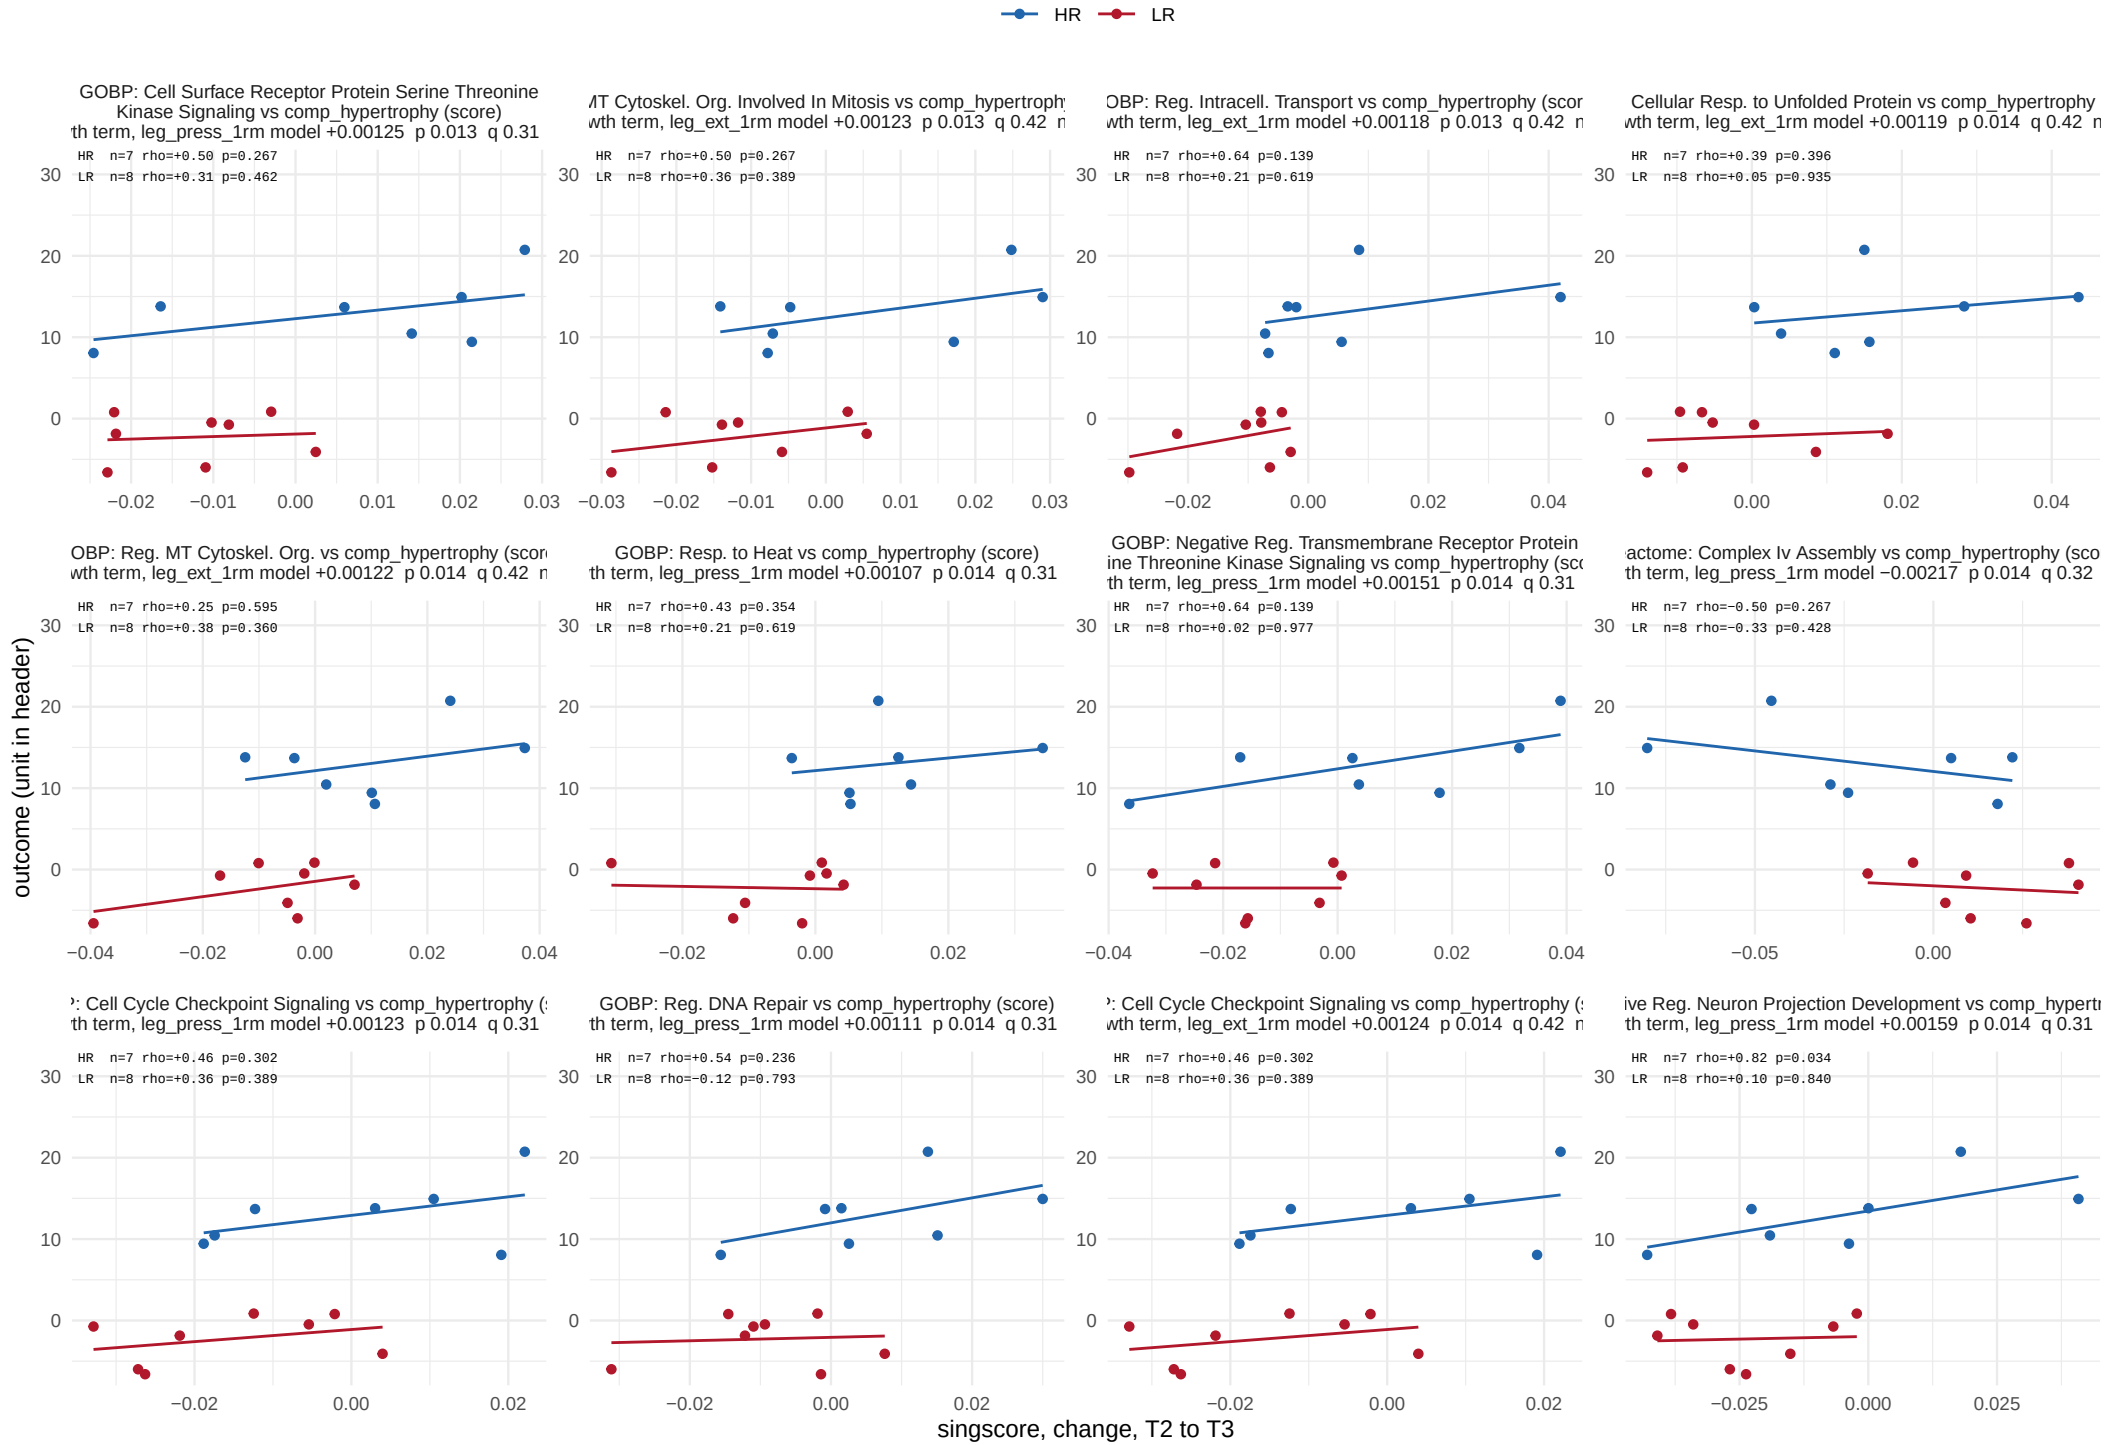


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

## Two predictor, acute window


334 of 5512 feature−outcome pairs at p < 0.05, 6 at BH < 0.05. Page 9 of 28.

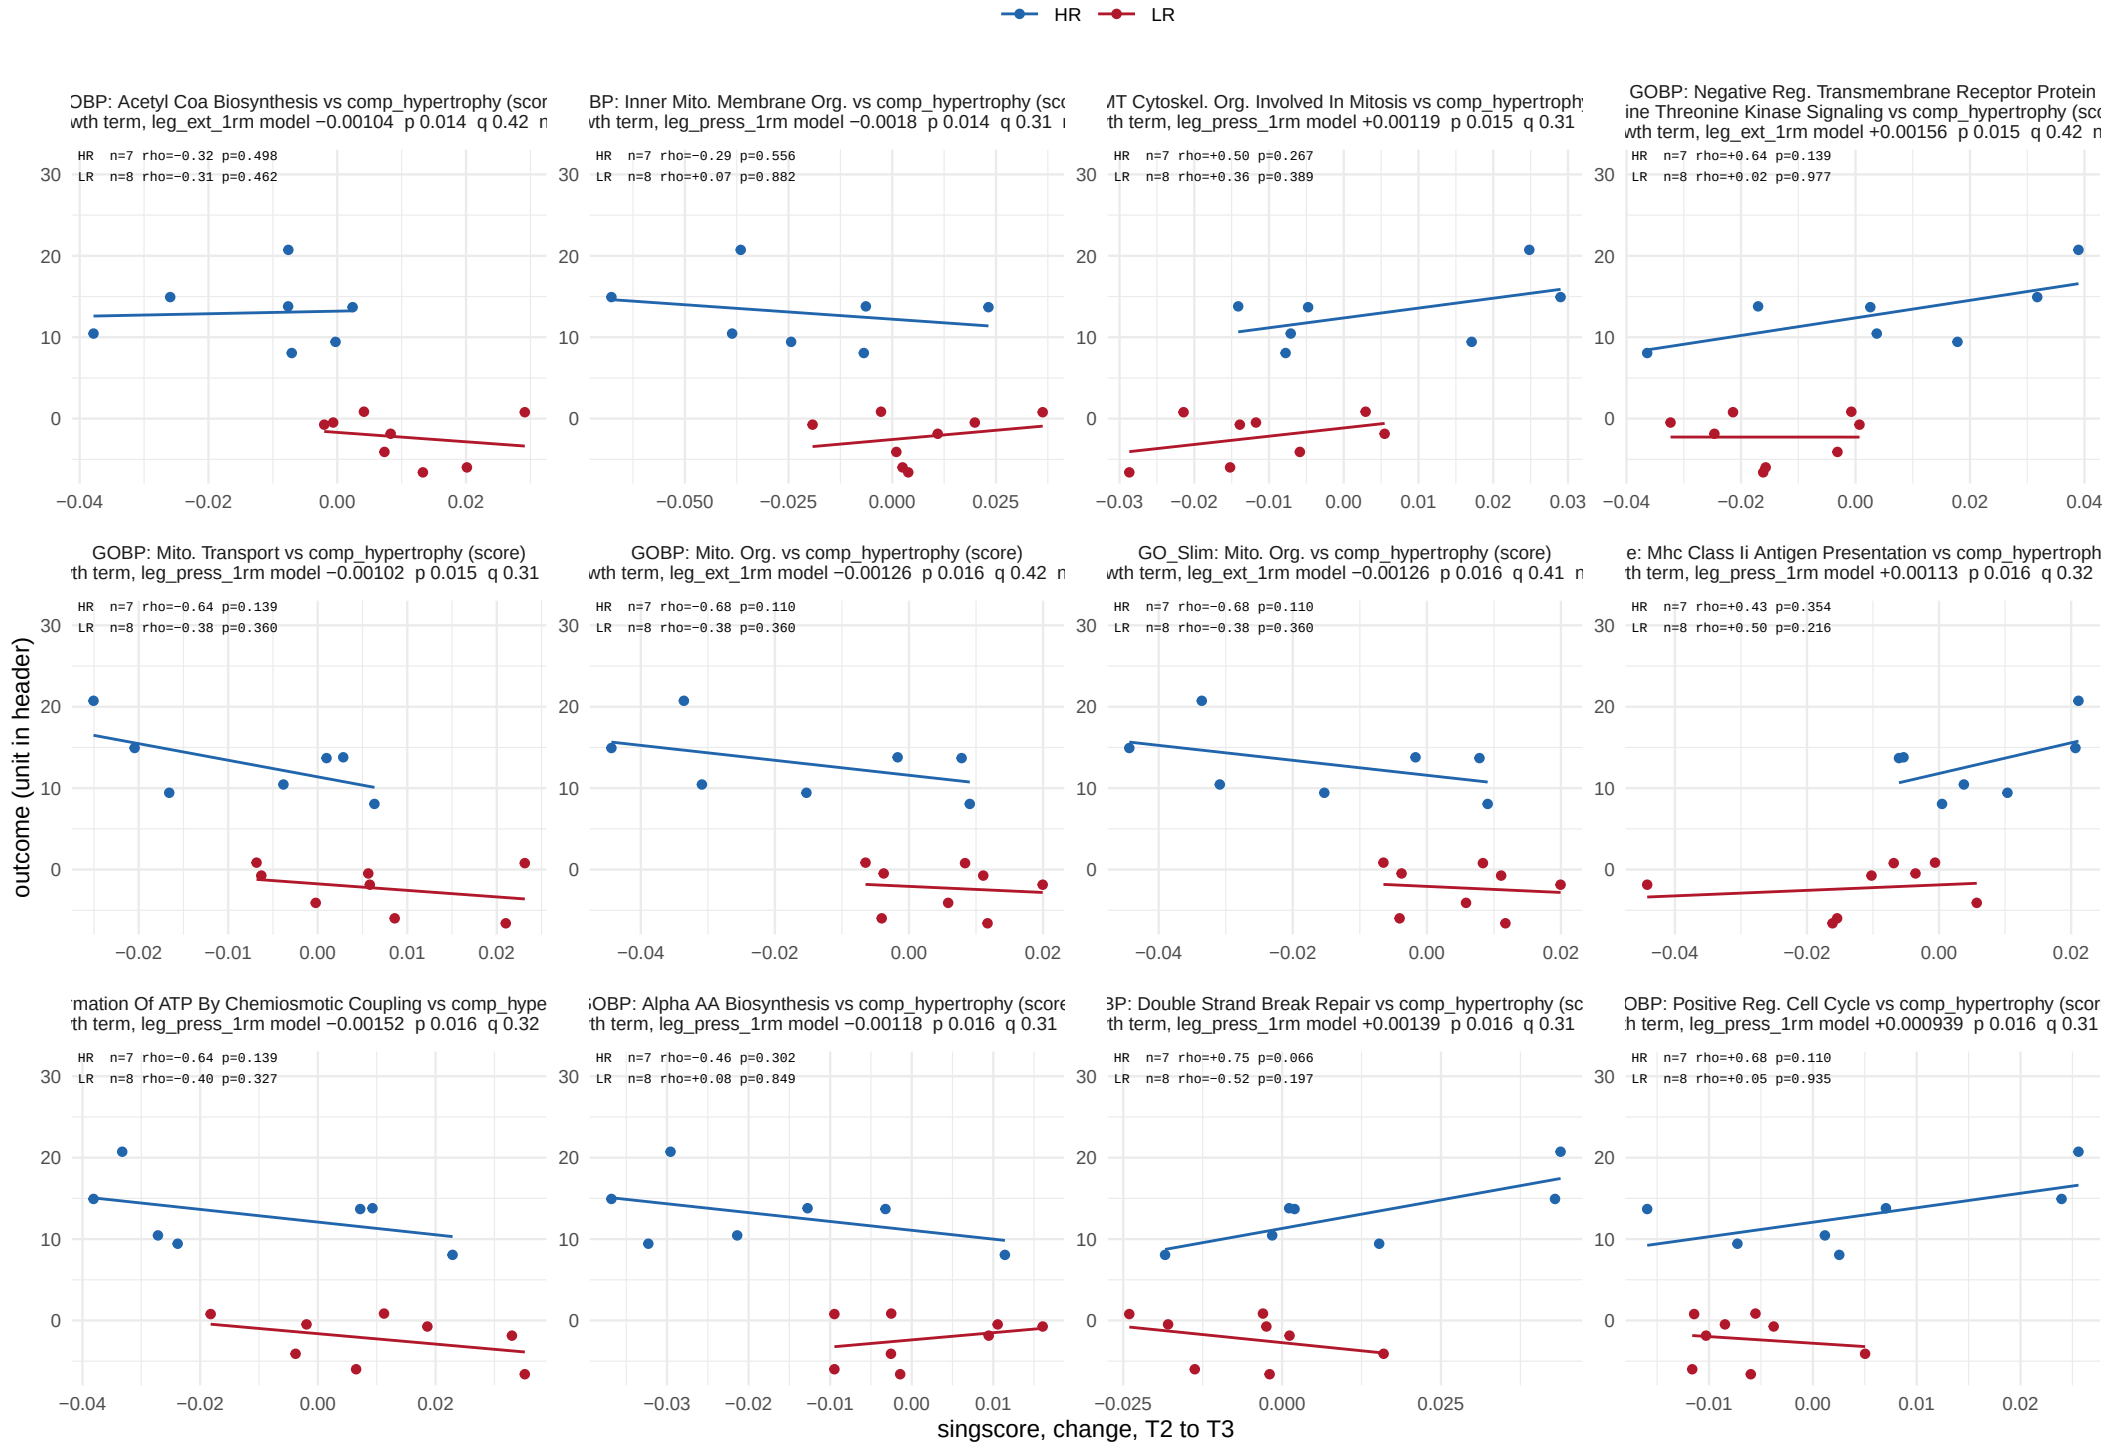


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

## Two predictor, acute window


334 of 5512 feature−outcome pairs at p < 0.05, 6 at BH < 0.05. Page 10 of 28.

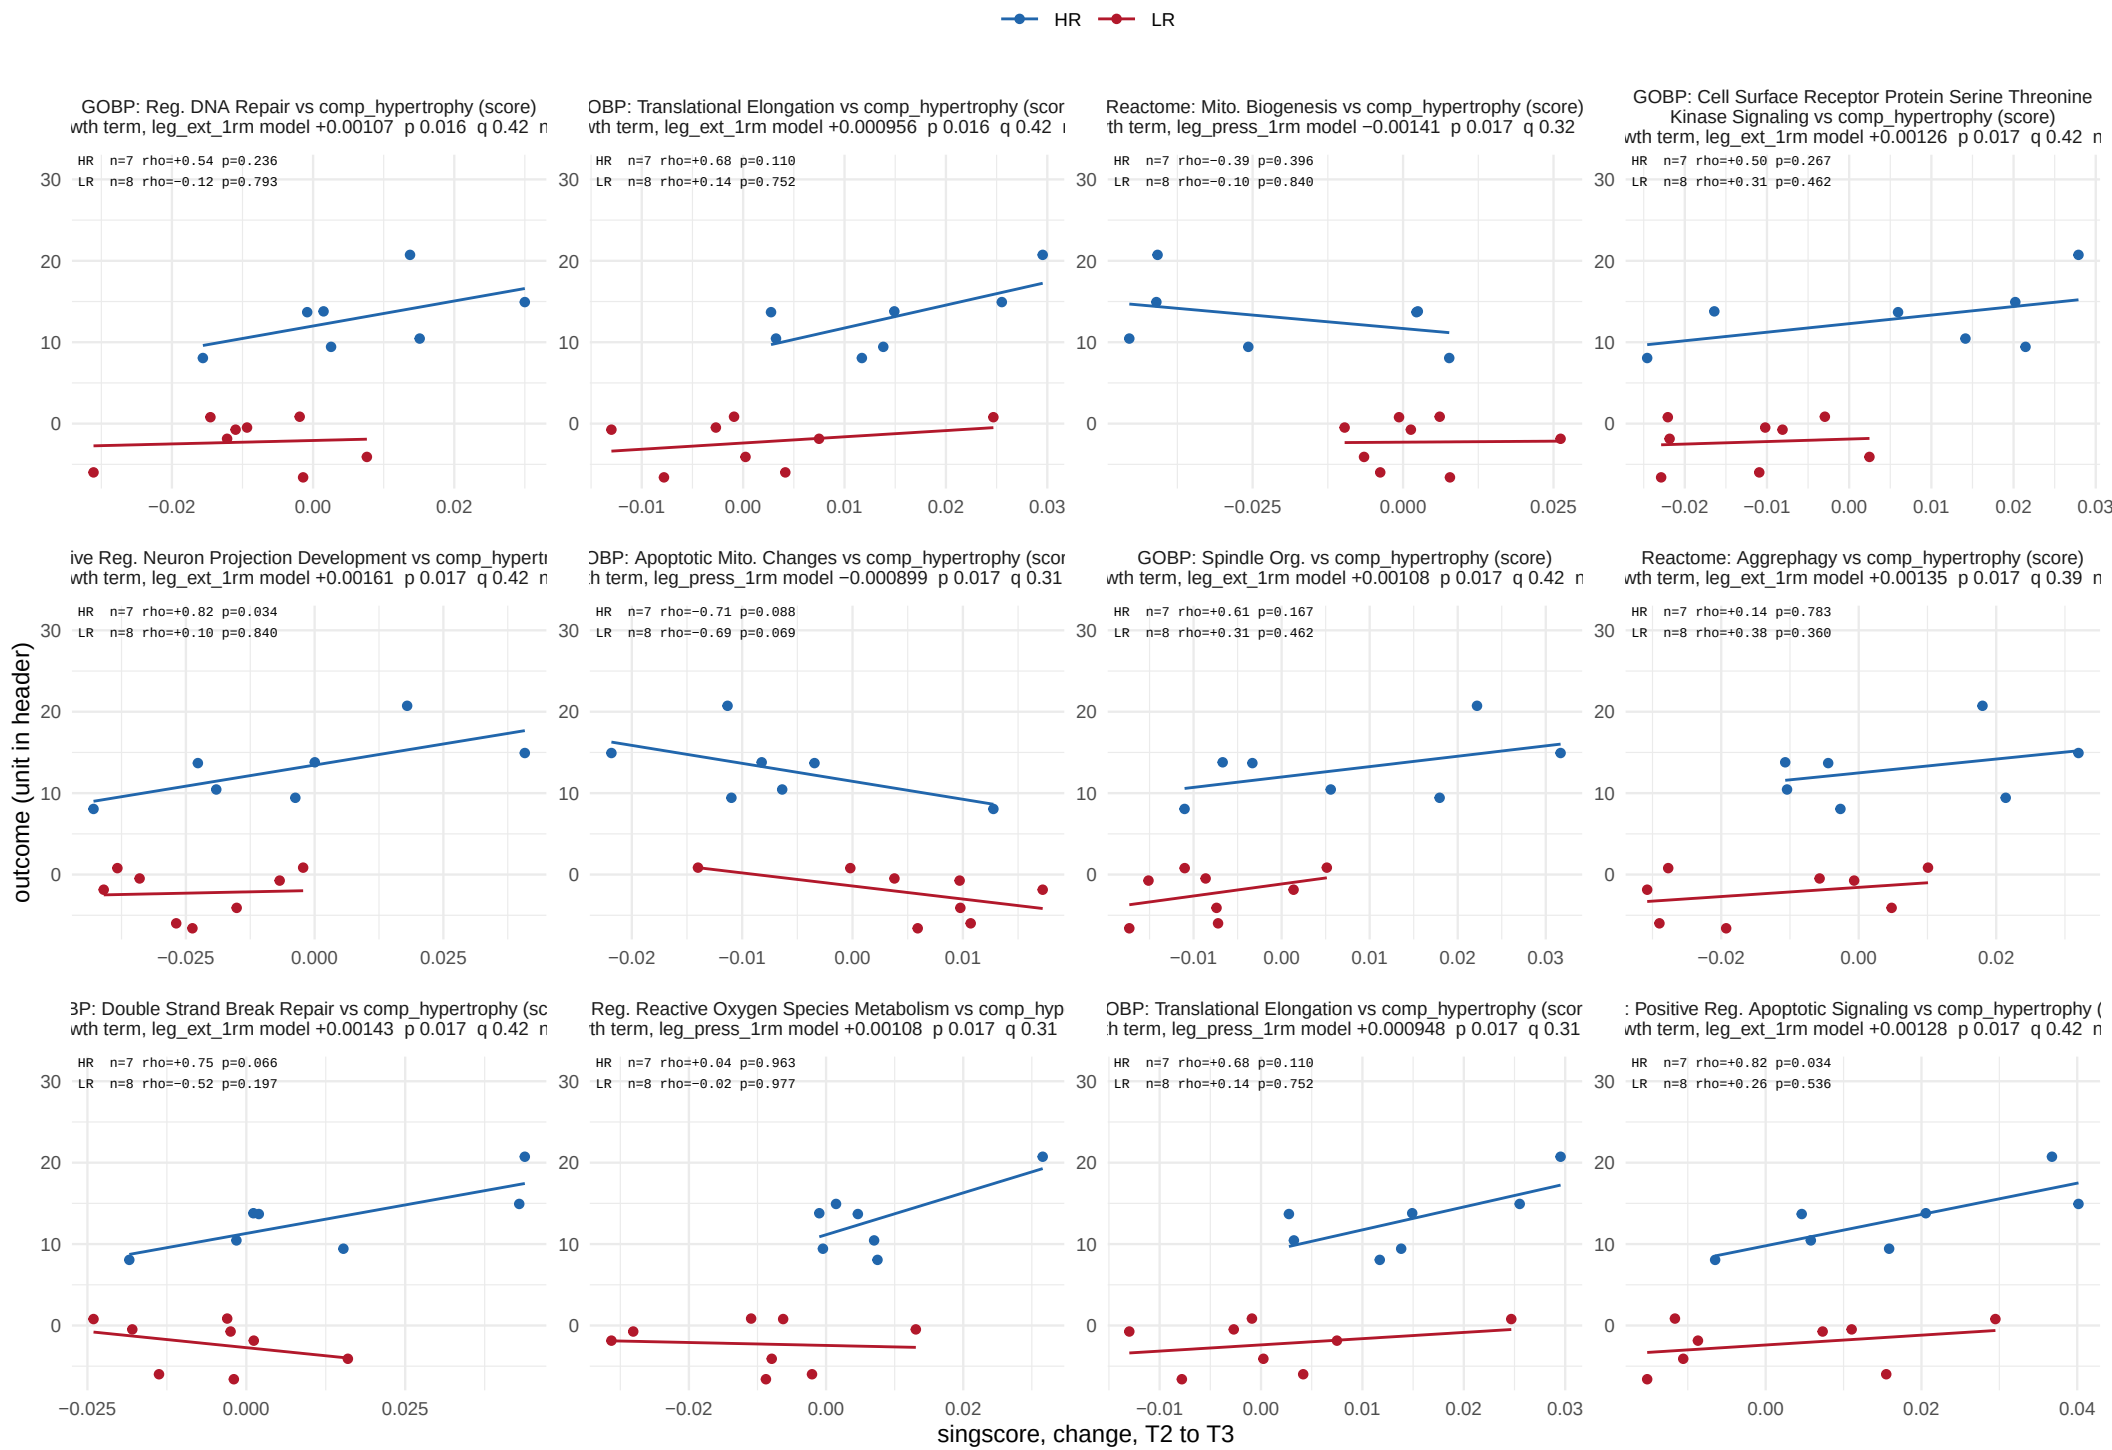


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

## Two predictor, acute window


334 of 5512 feature−outcome pairs at p < 0.05, 6 at BH < 0.05. Page 11 of 28.

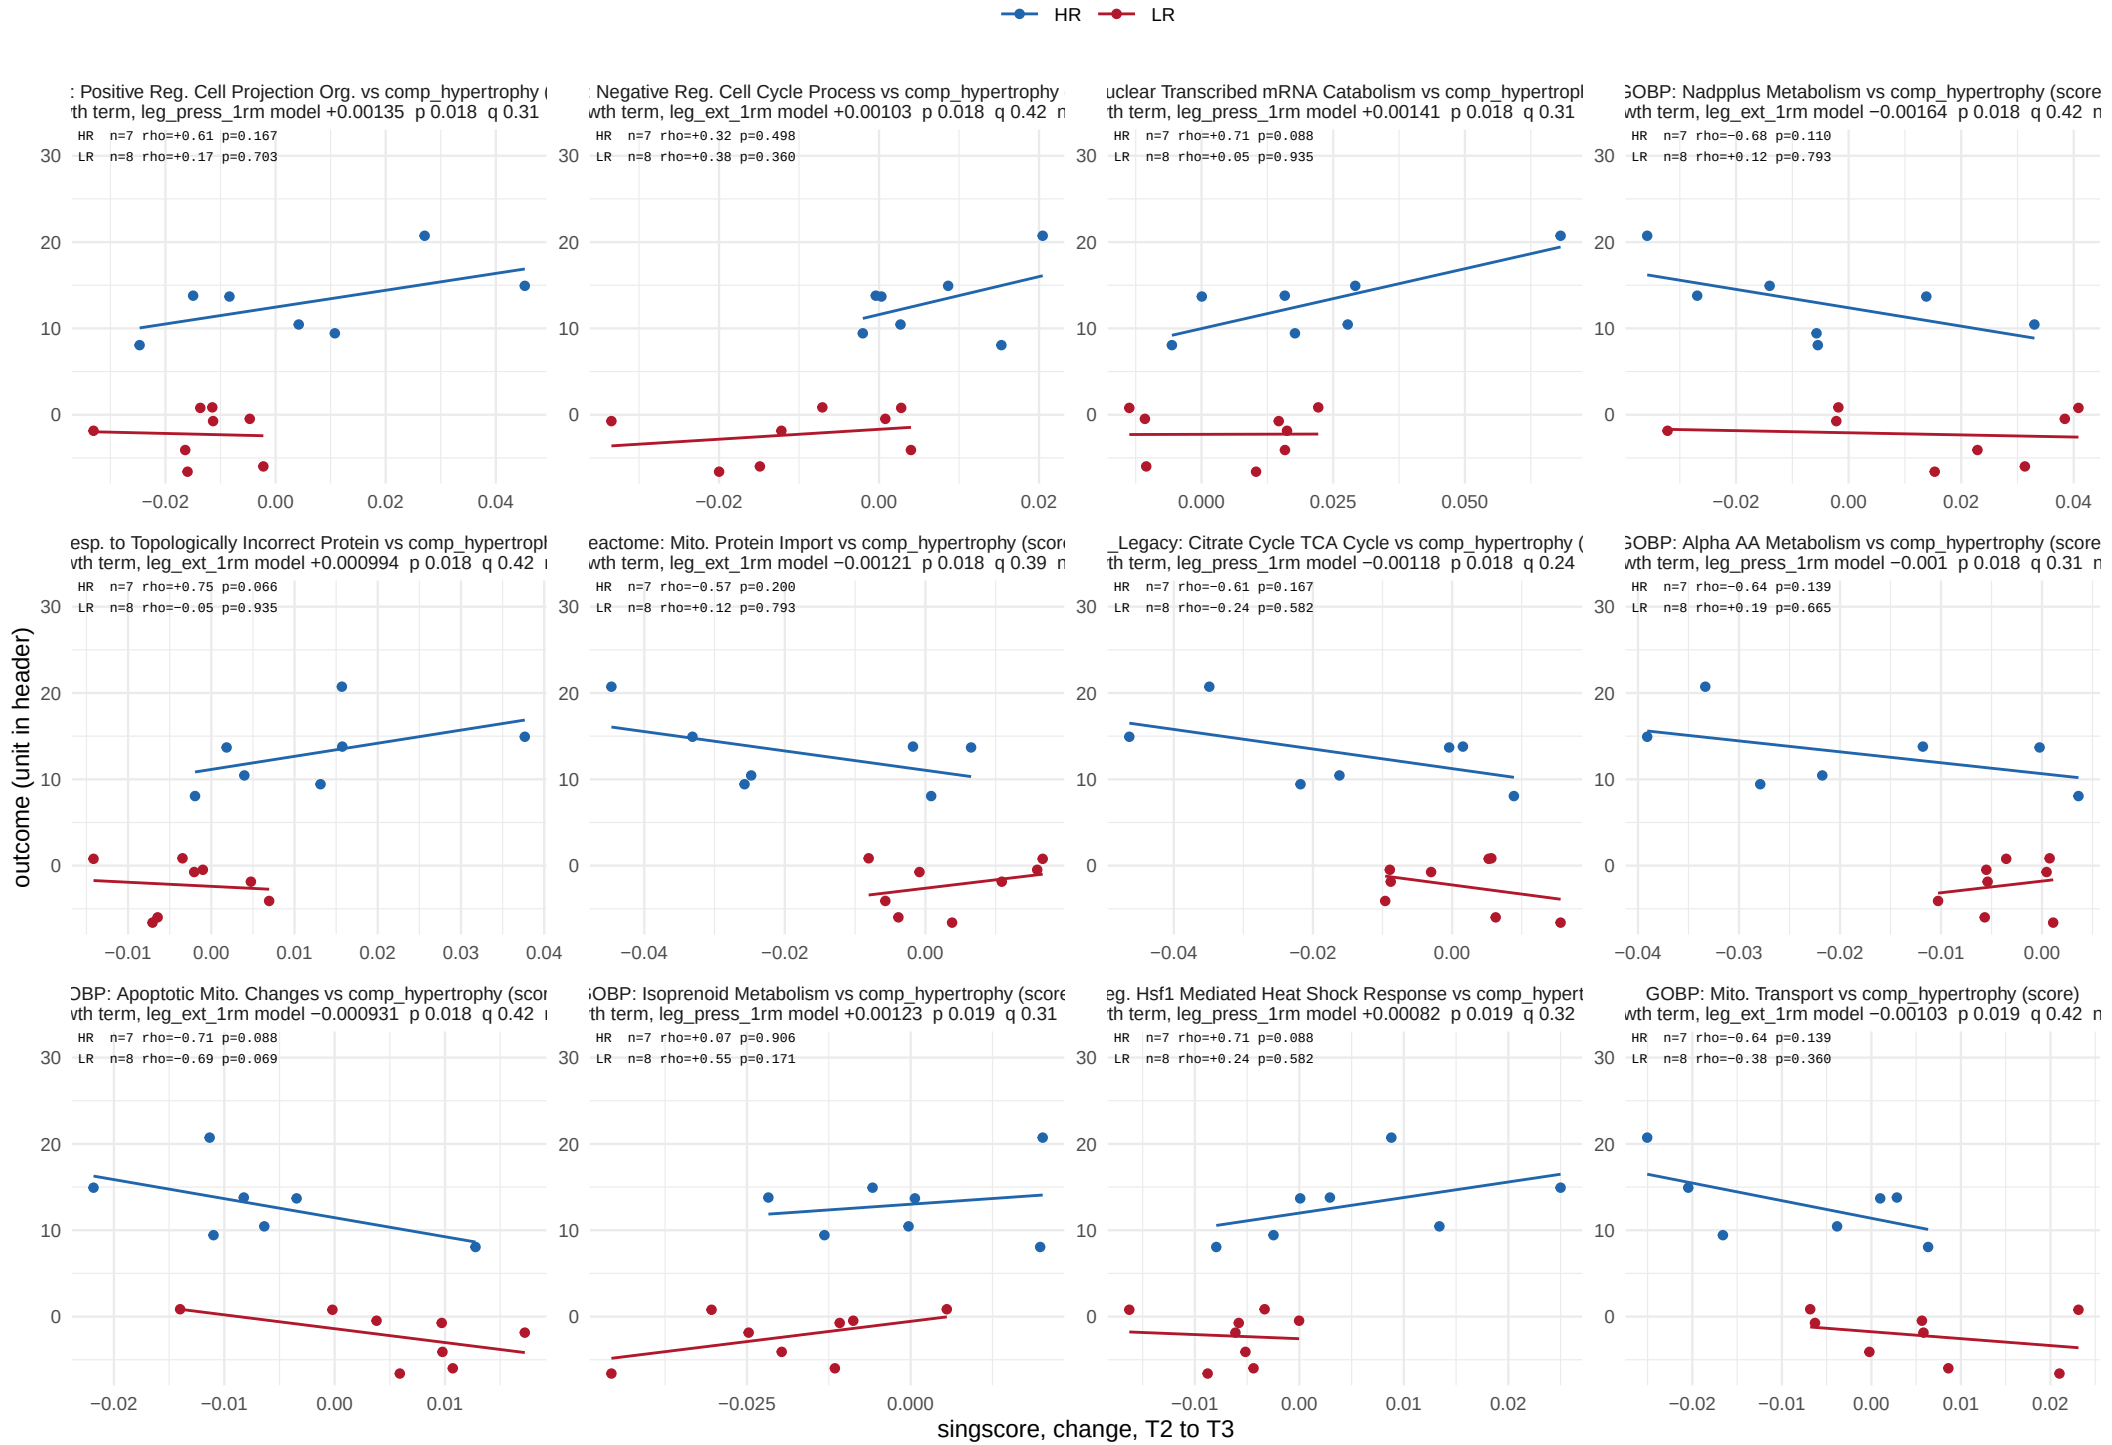


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

## Two predictor, acute window


334 of 5512 feature−outcome pairs at p < 0.05, 6 at BH < 0.05. Page 12 of 28.

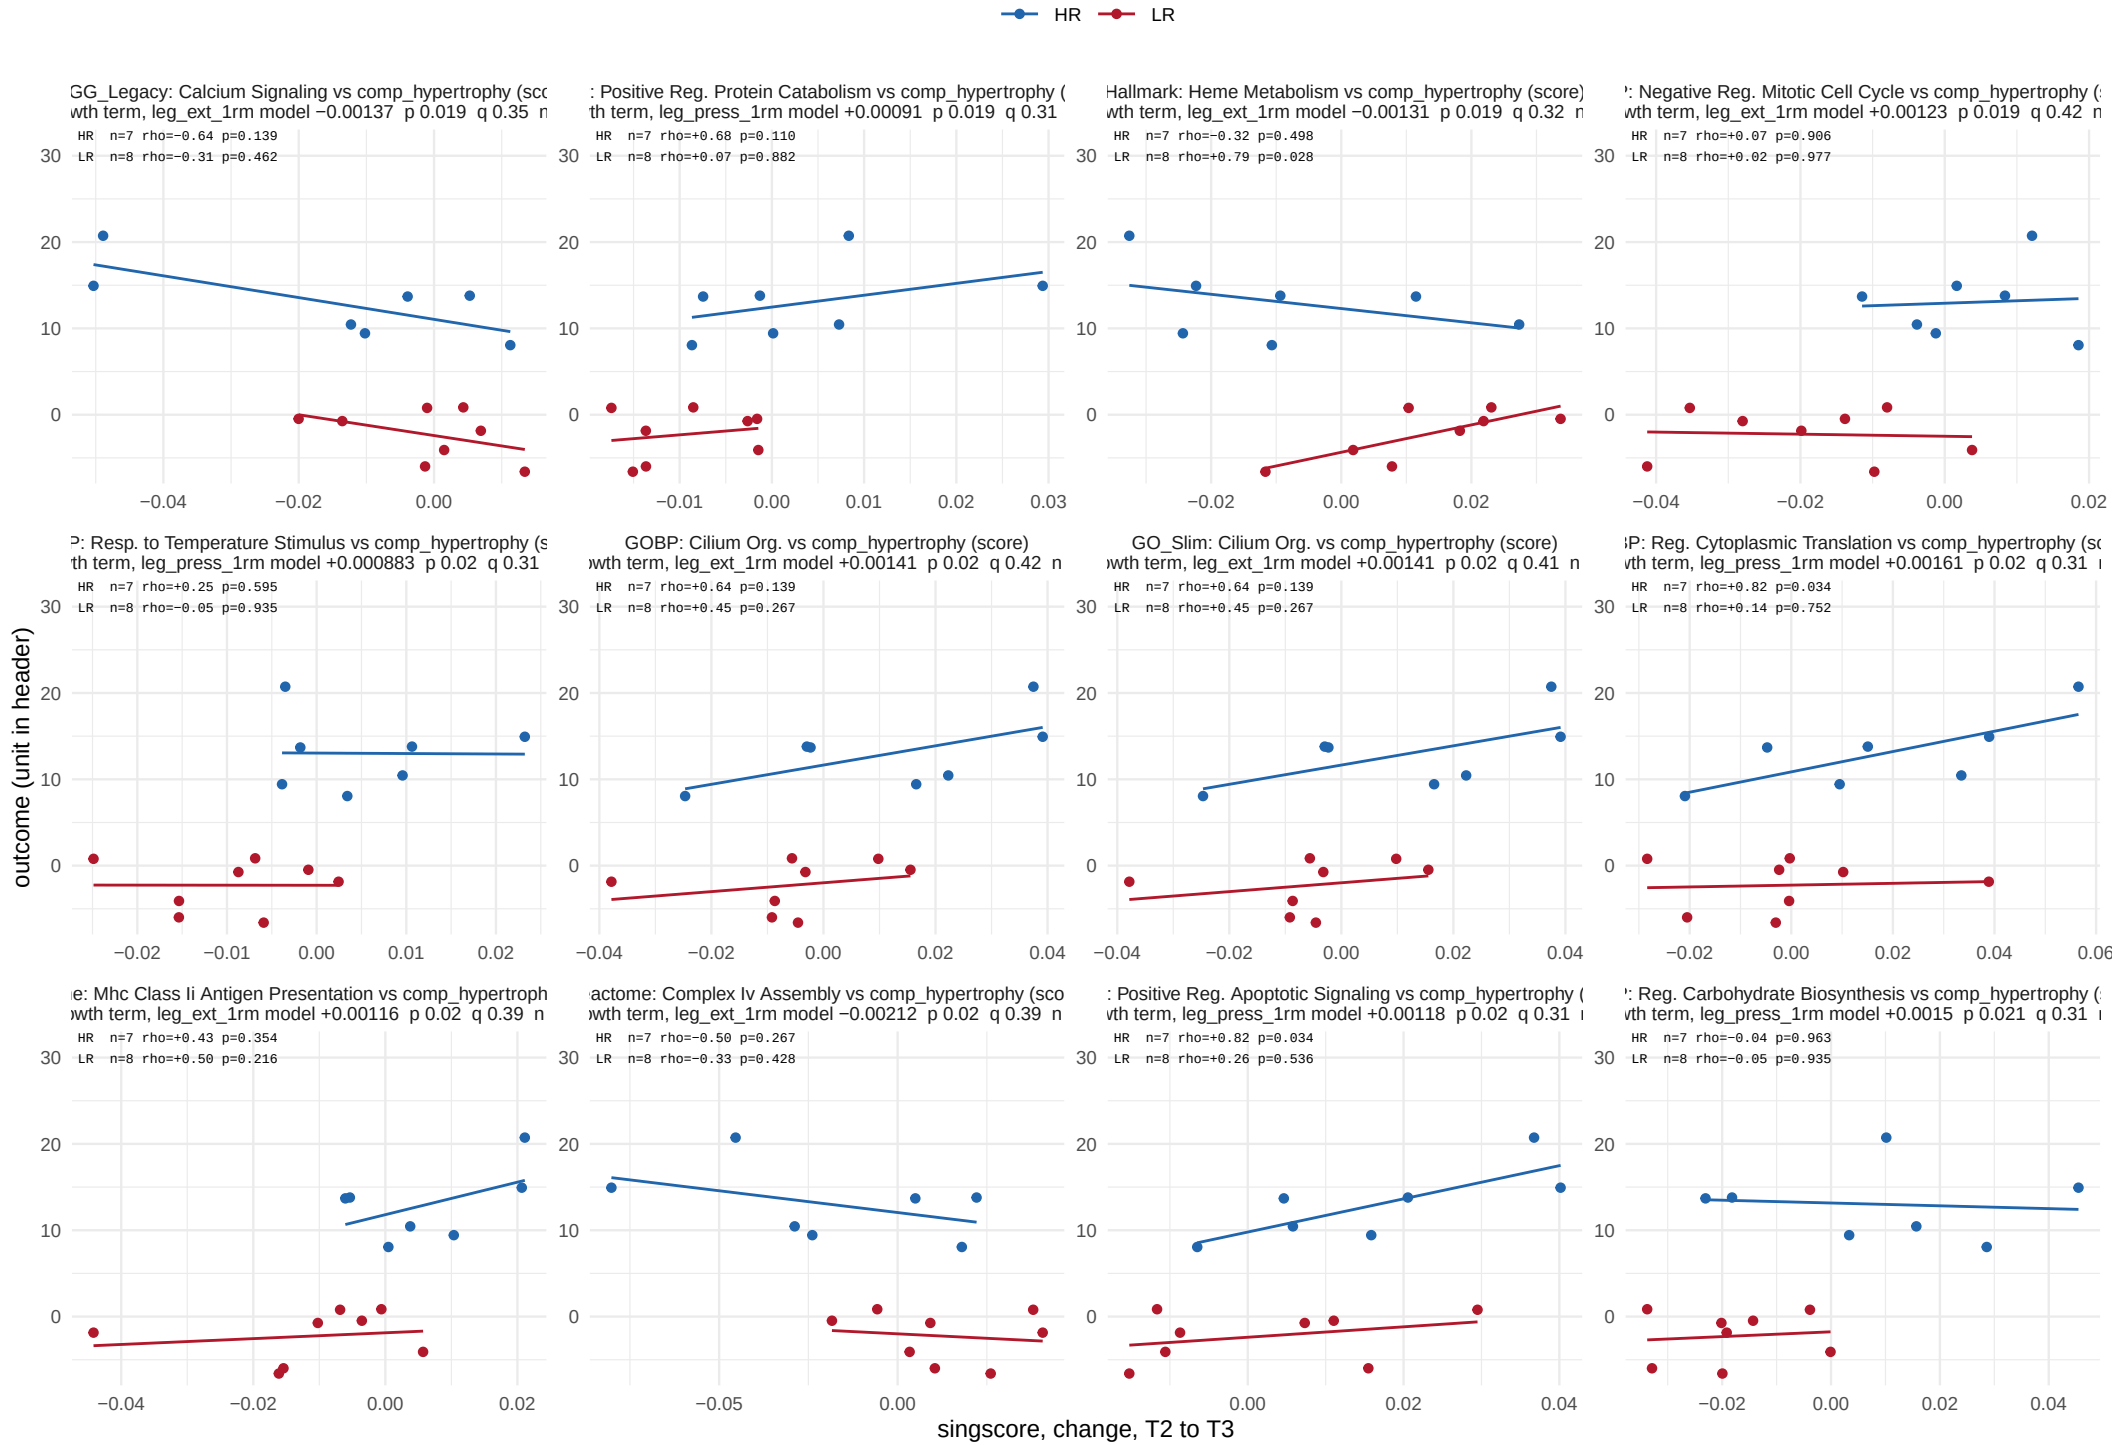


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

## Two predictor, acute window


334 of 5512 feature−outcome pairs at p < 0.05, 6 at BH < 0.05. Page 13 of 28.

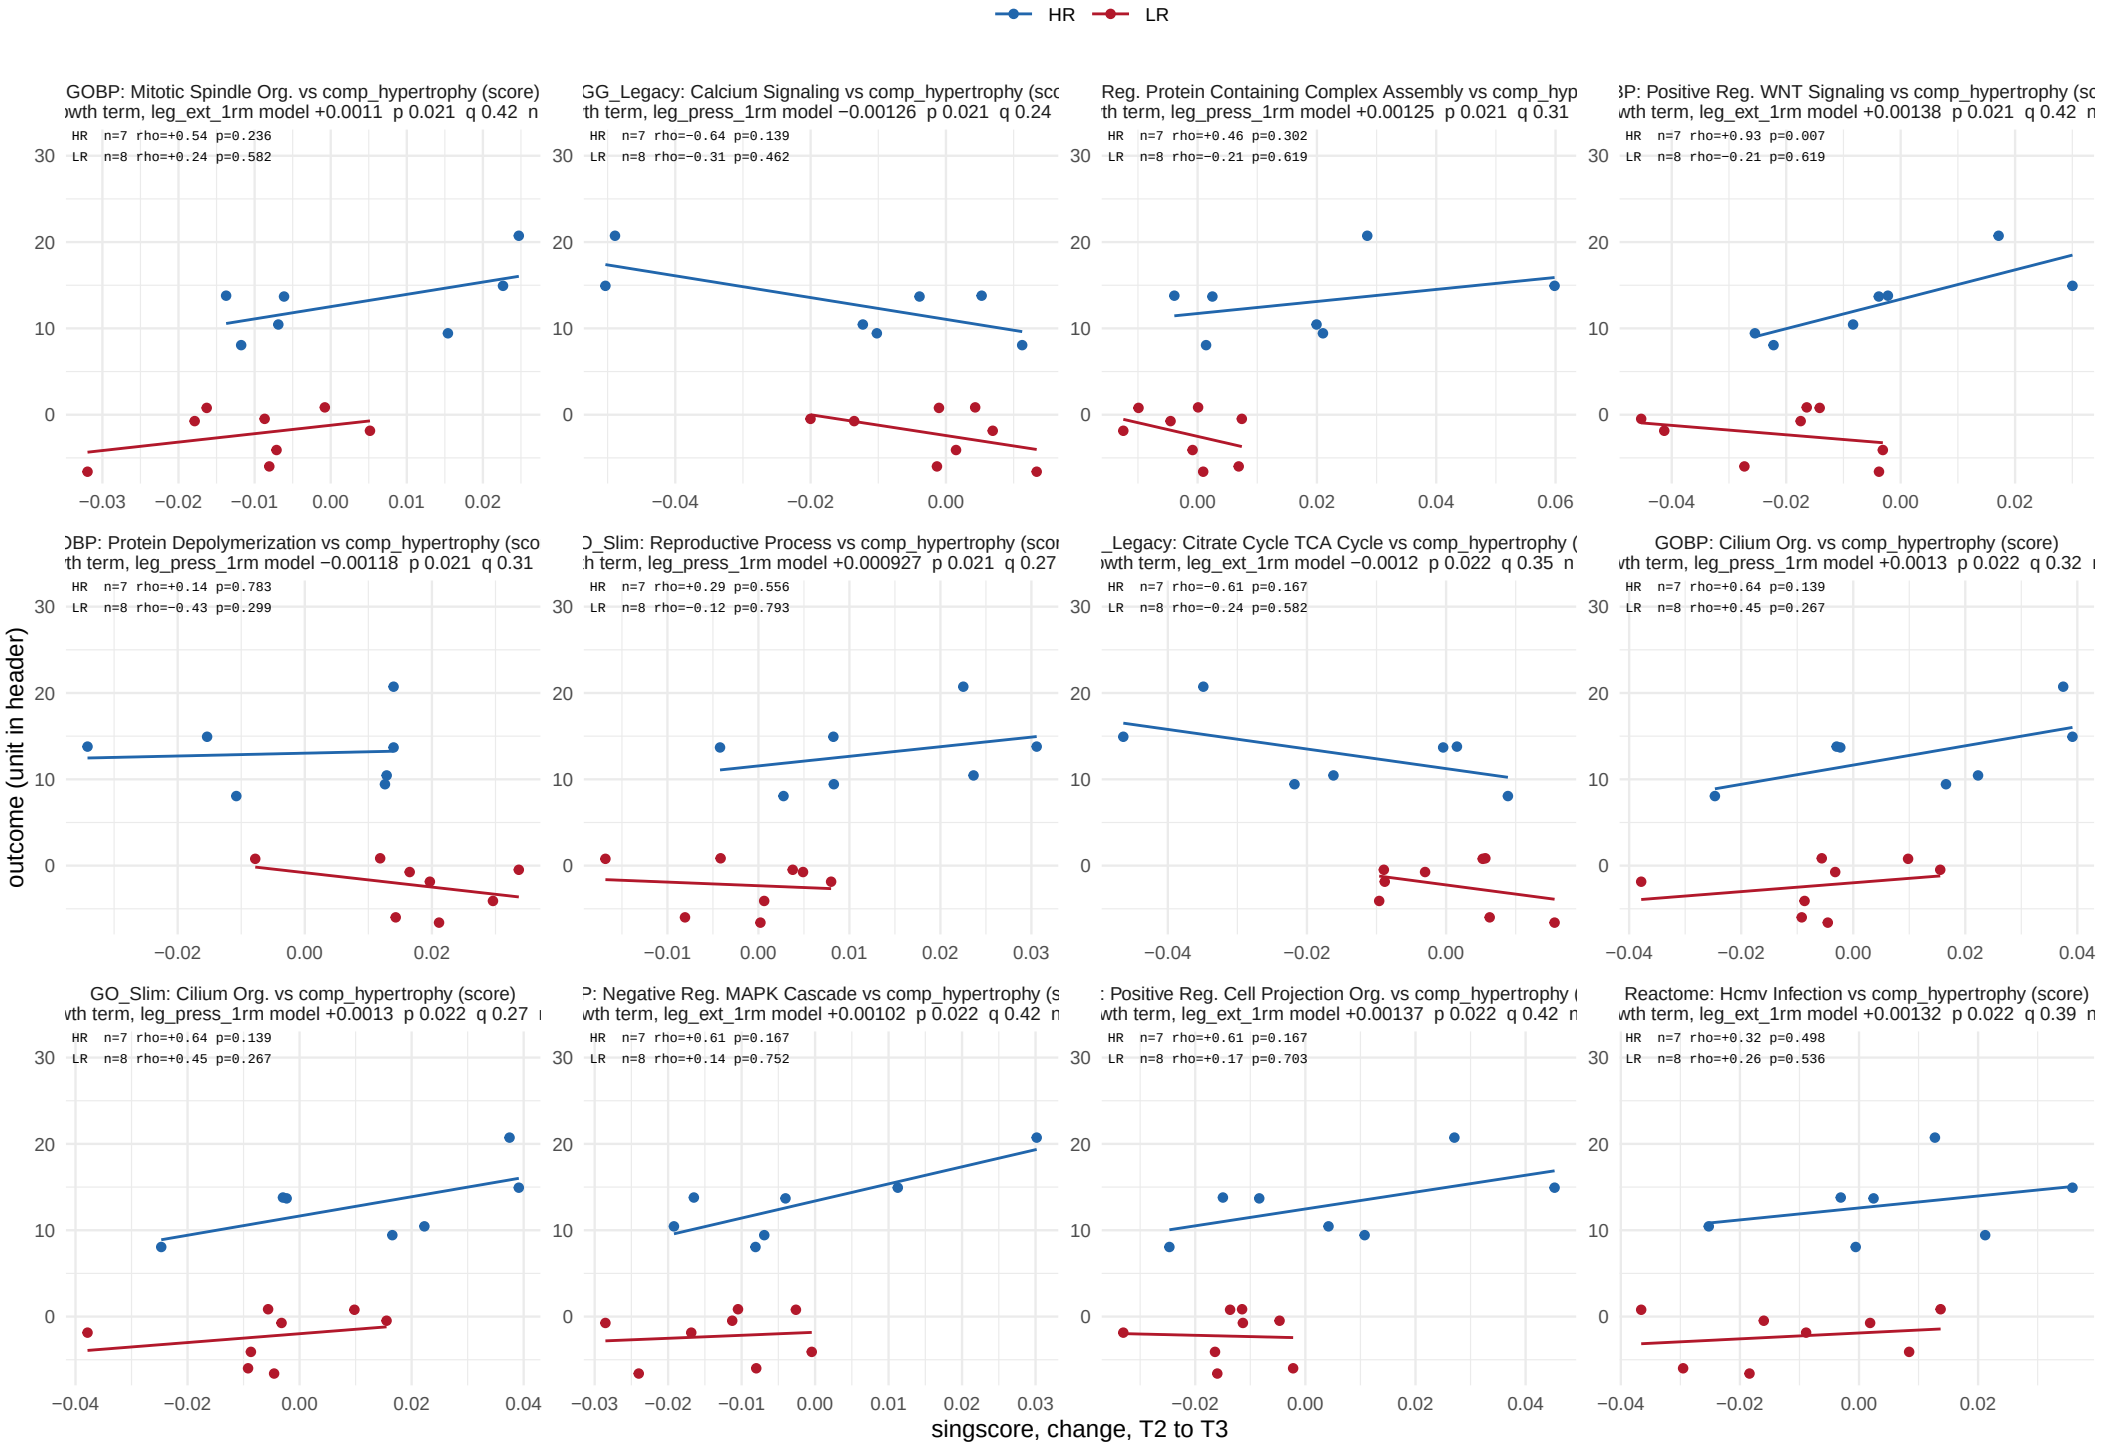


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

## Two predictor, acute window


334 of 5512 feature−outcome pairs at p < 0.05, 6 at BH < 0.05. Page 14 of 28.

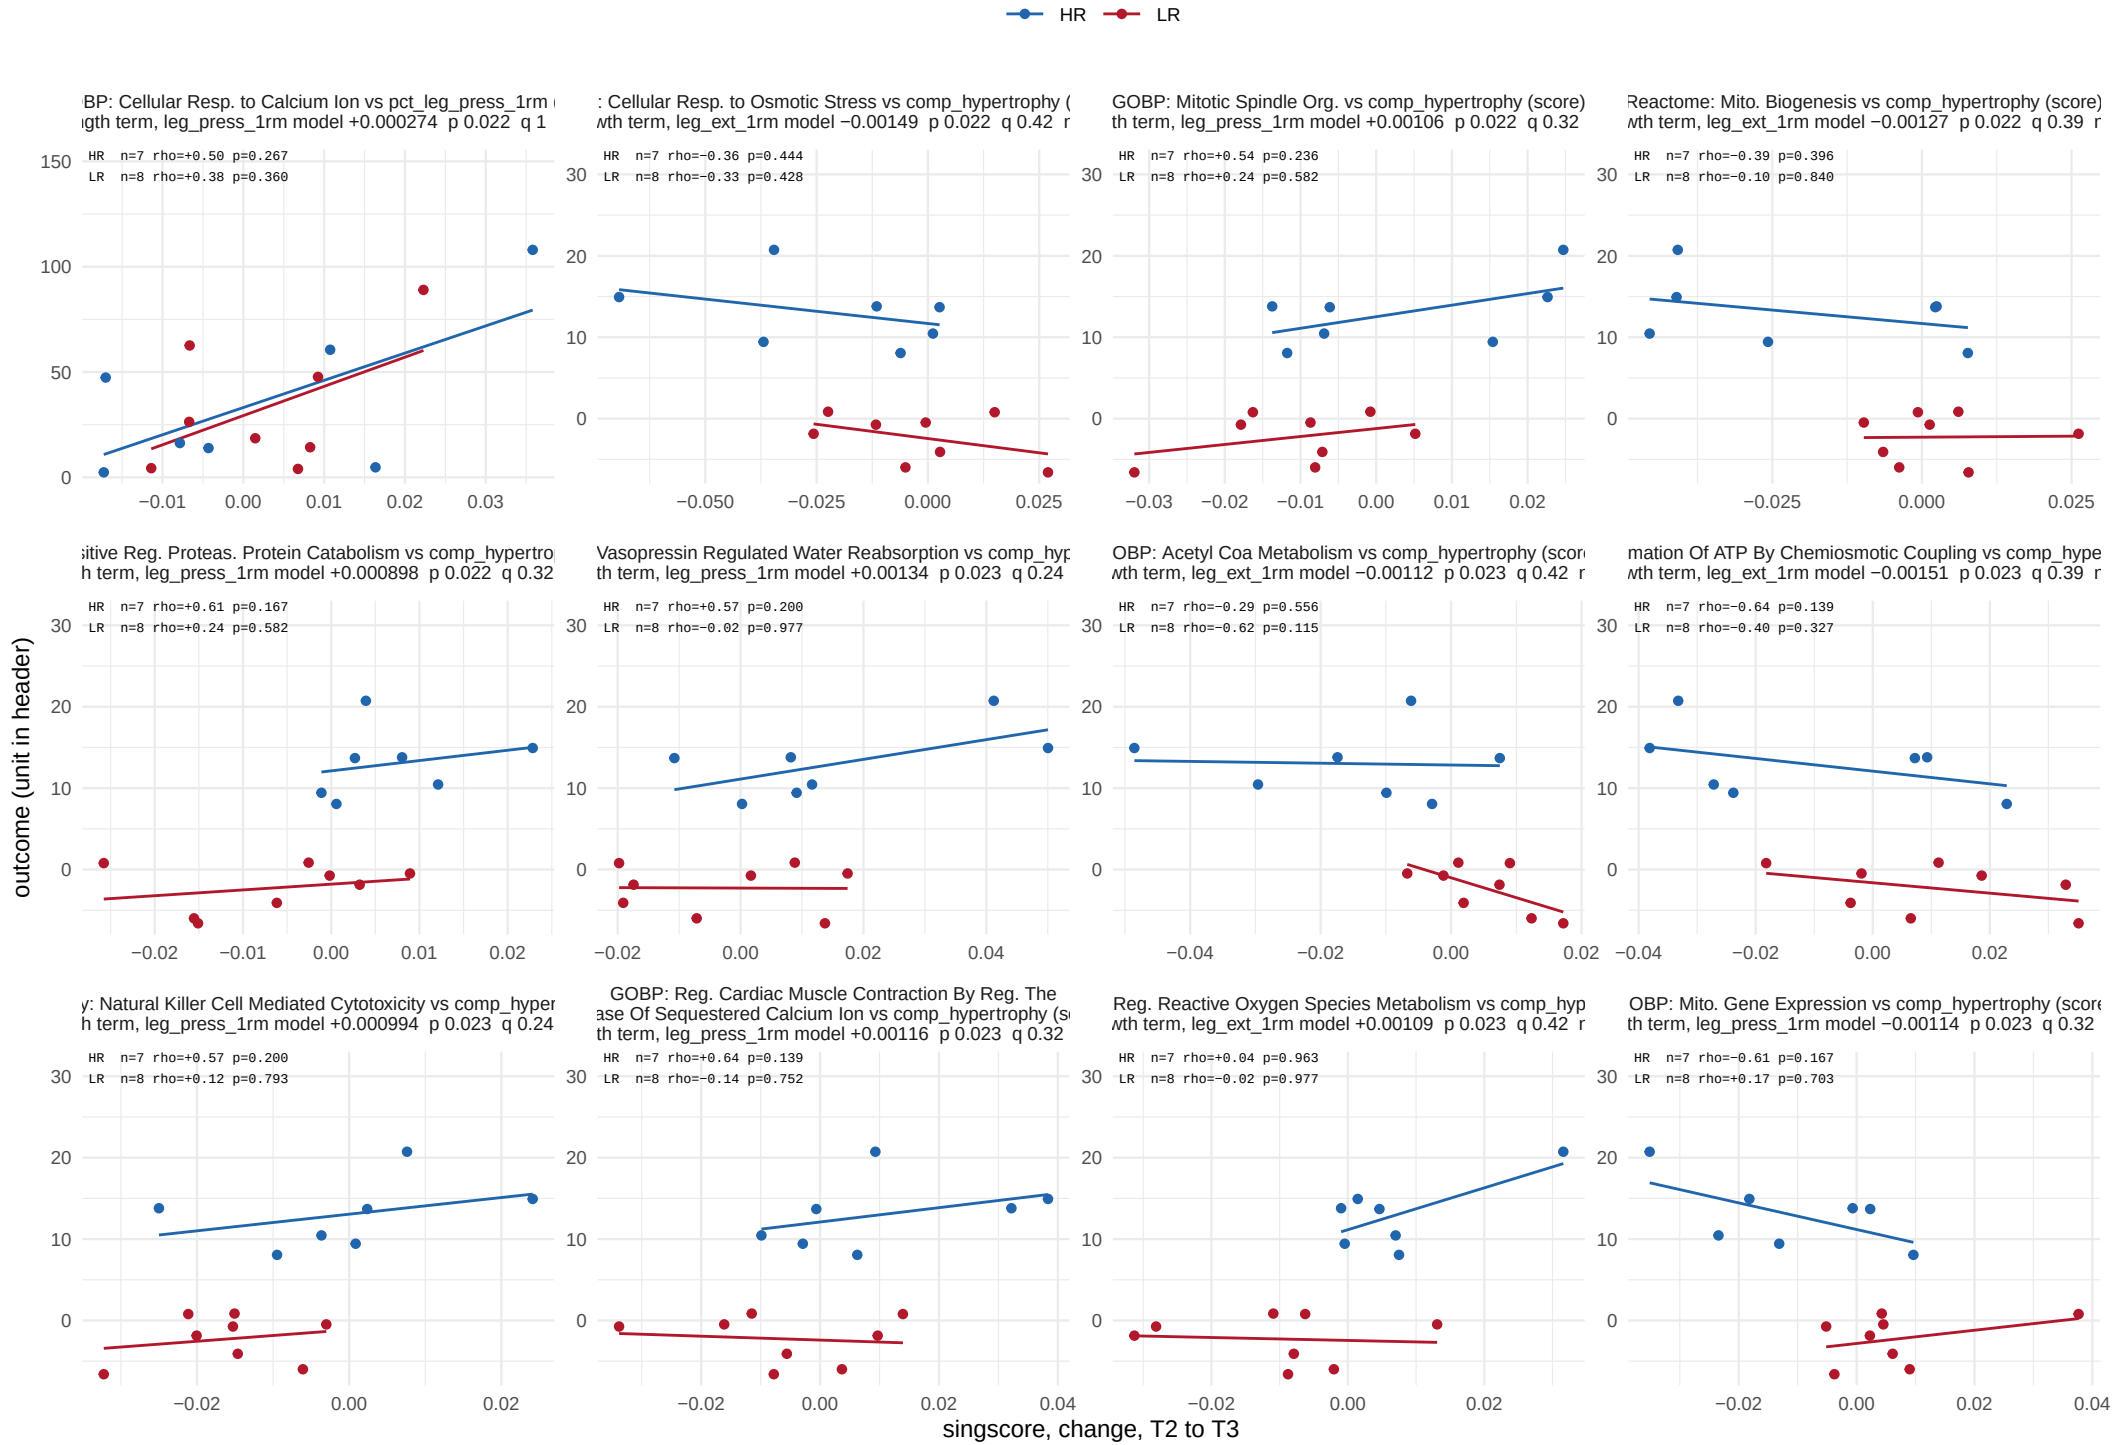


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

## Two predictor, acute window


334 of 5512 feature−outcome pairs at p < 0.05, 6 at BH < 0.05. Page 15 of 28.

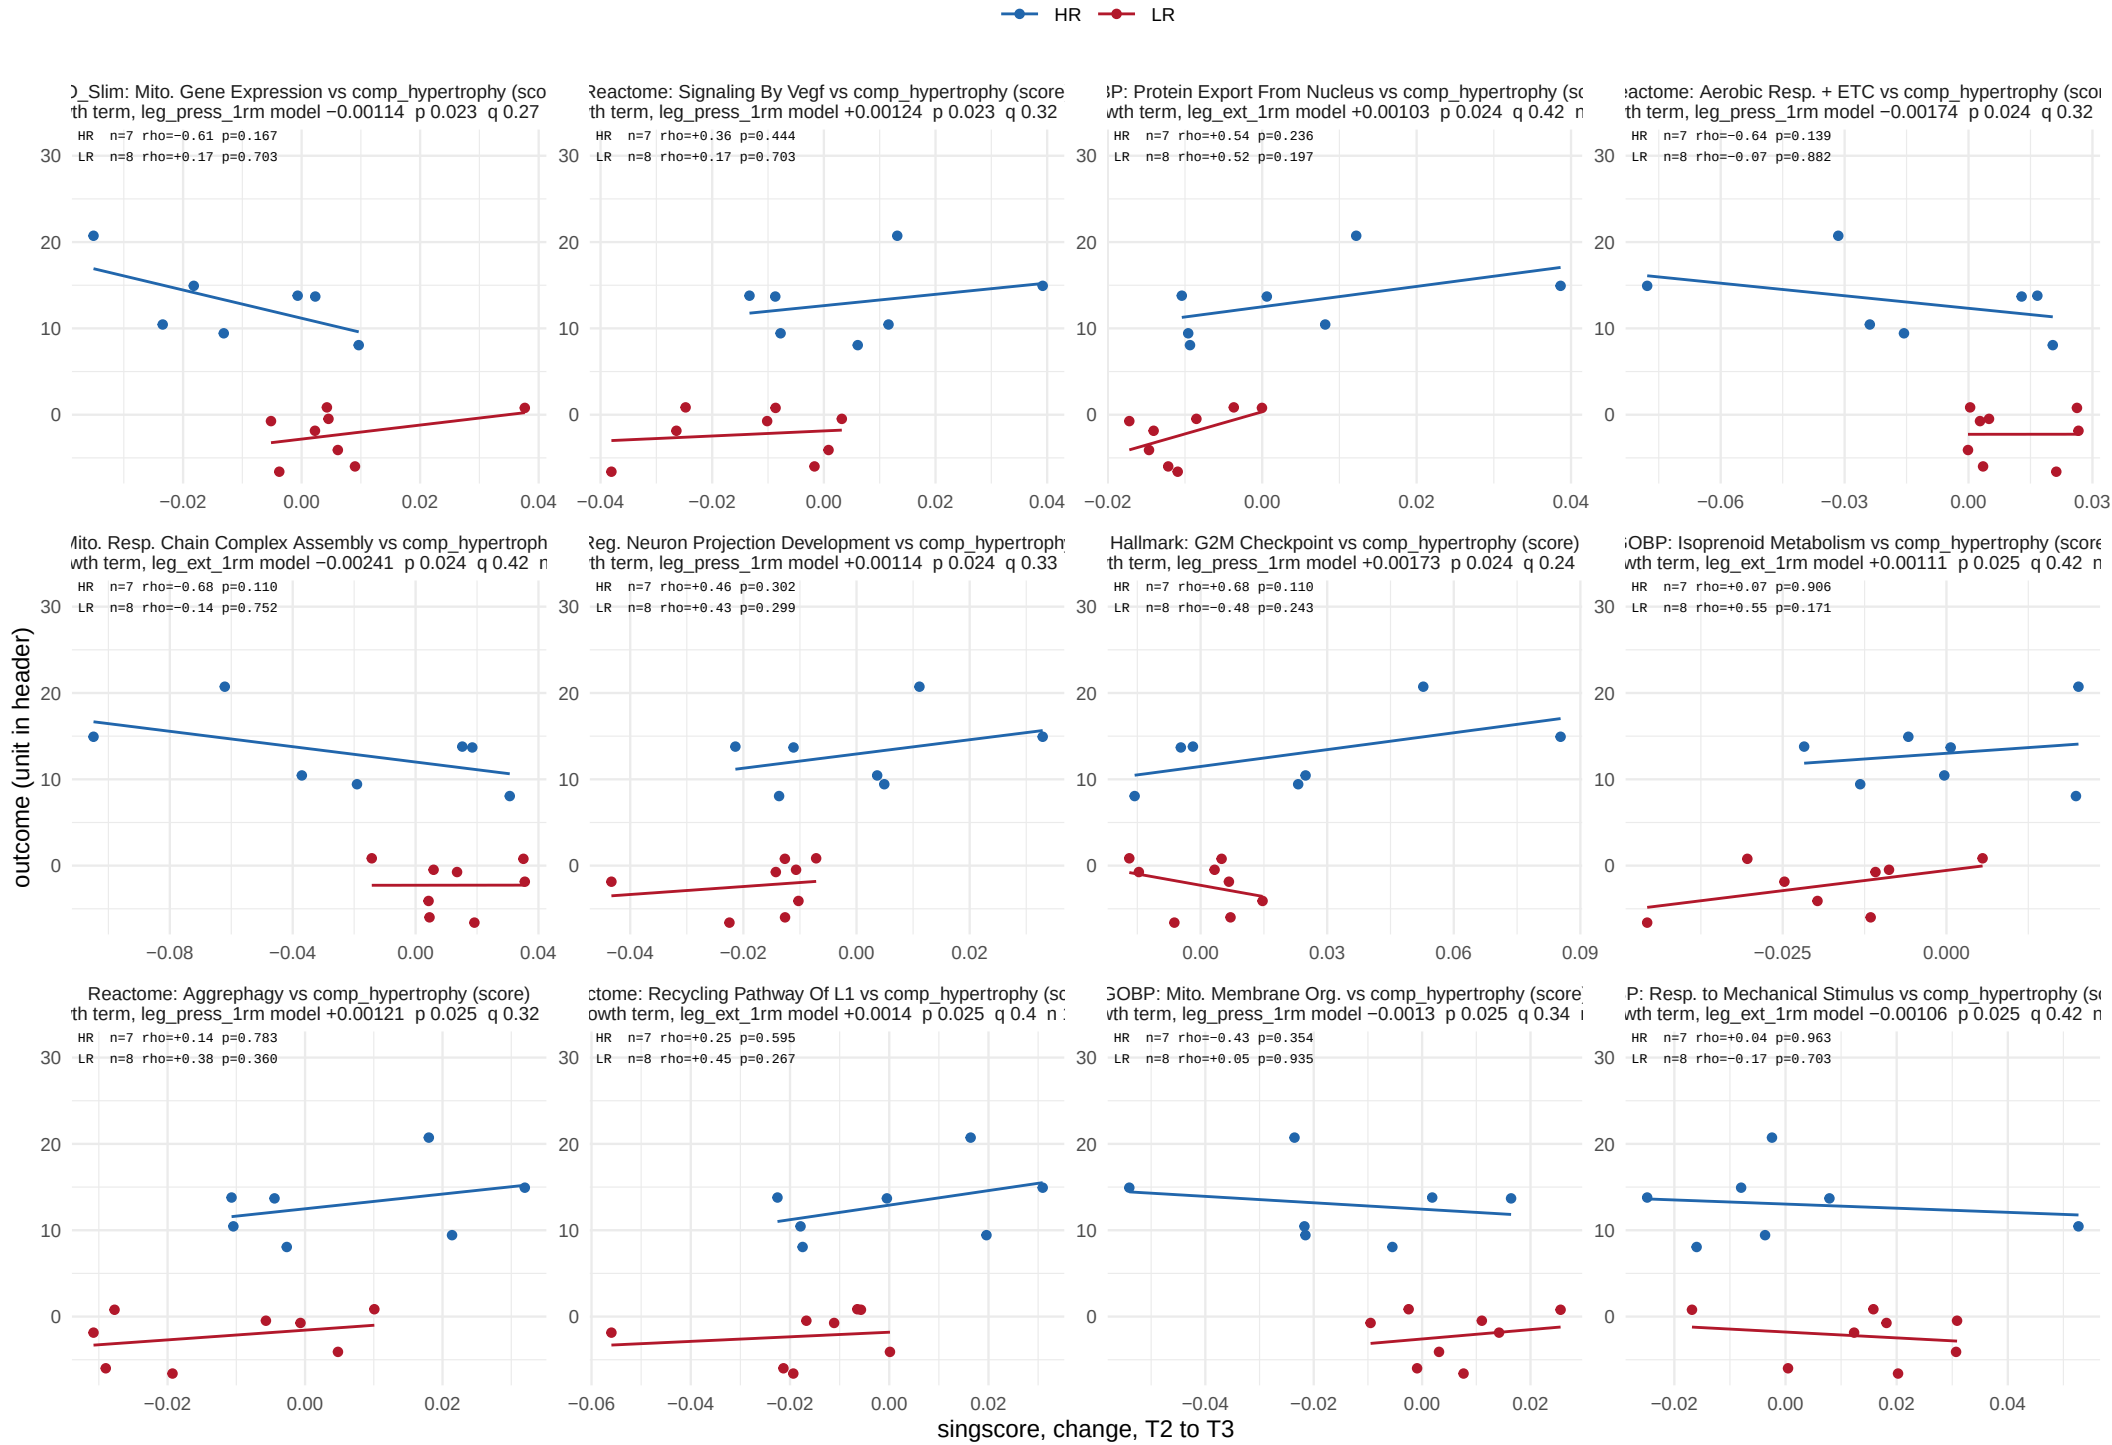


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

## Two predictor, acute window


334 of 5512 feature−outcome pairs at p < 0.05, 6 at BH < 0.05. Page 16 of 28.

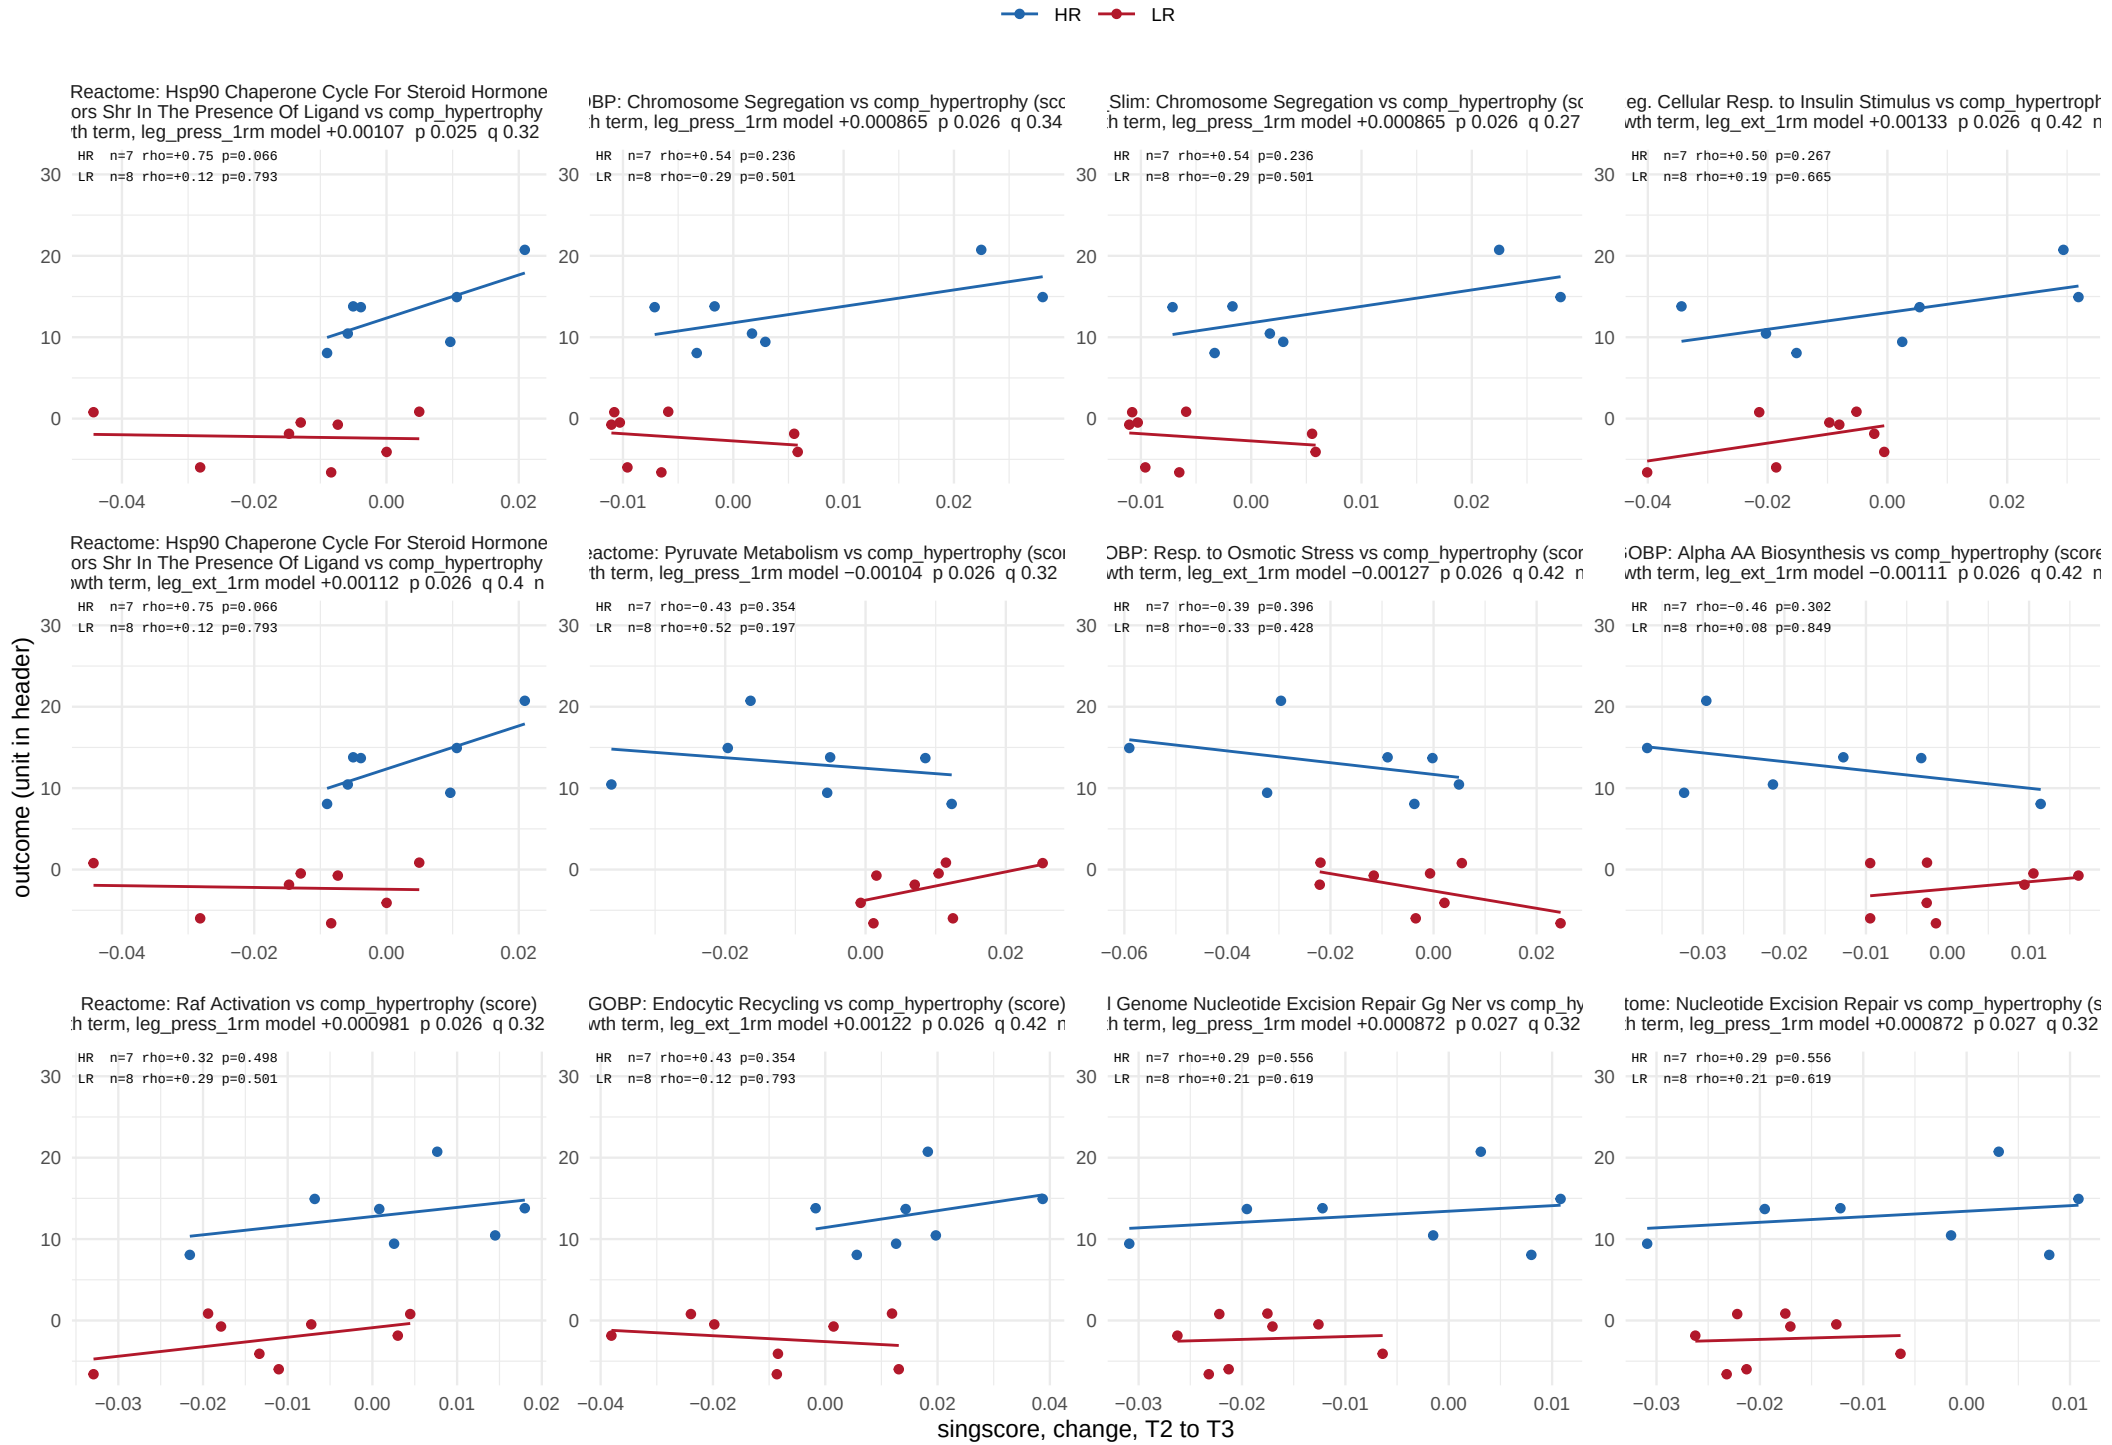


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

## Two predictor, acute window


334 of 5512 feature−outcome pairs at p < 0.05, 6 at BH < 0.05. Page 17 of 28.

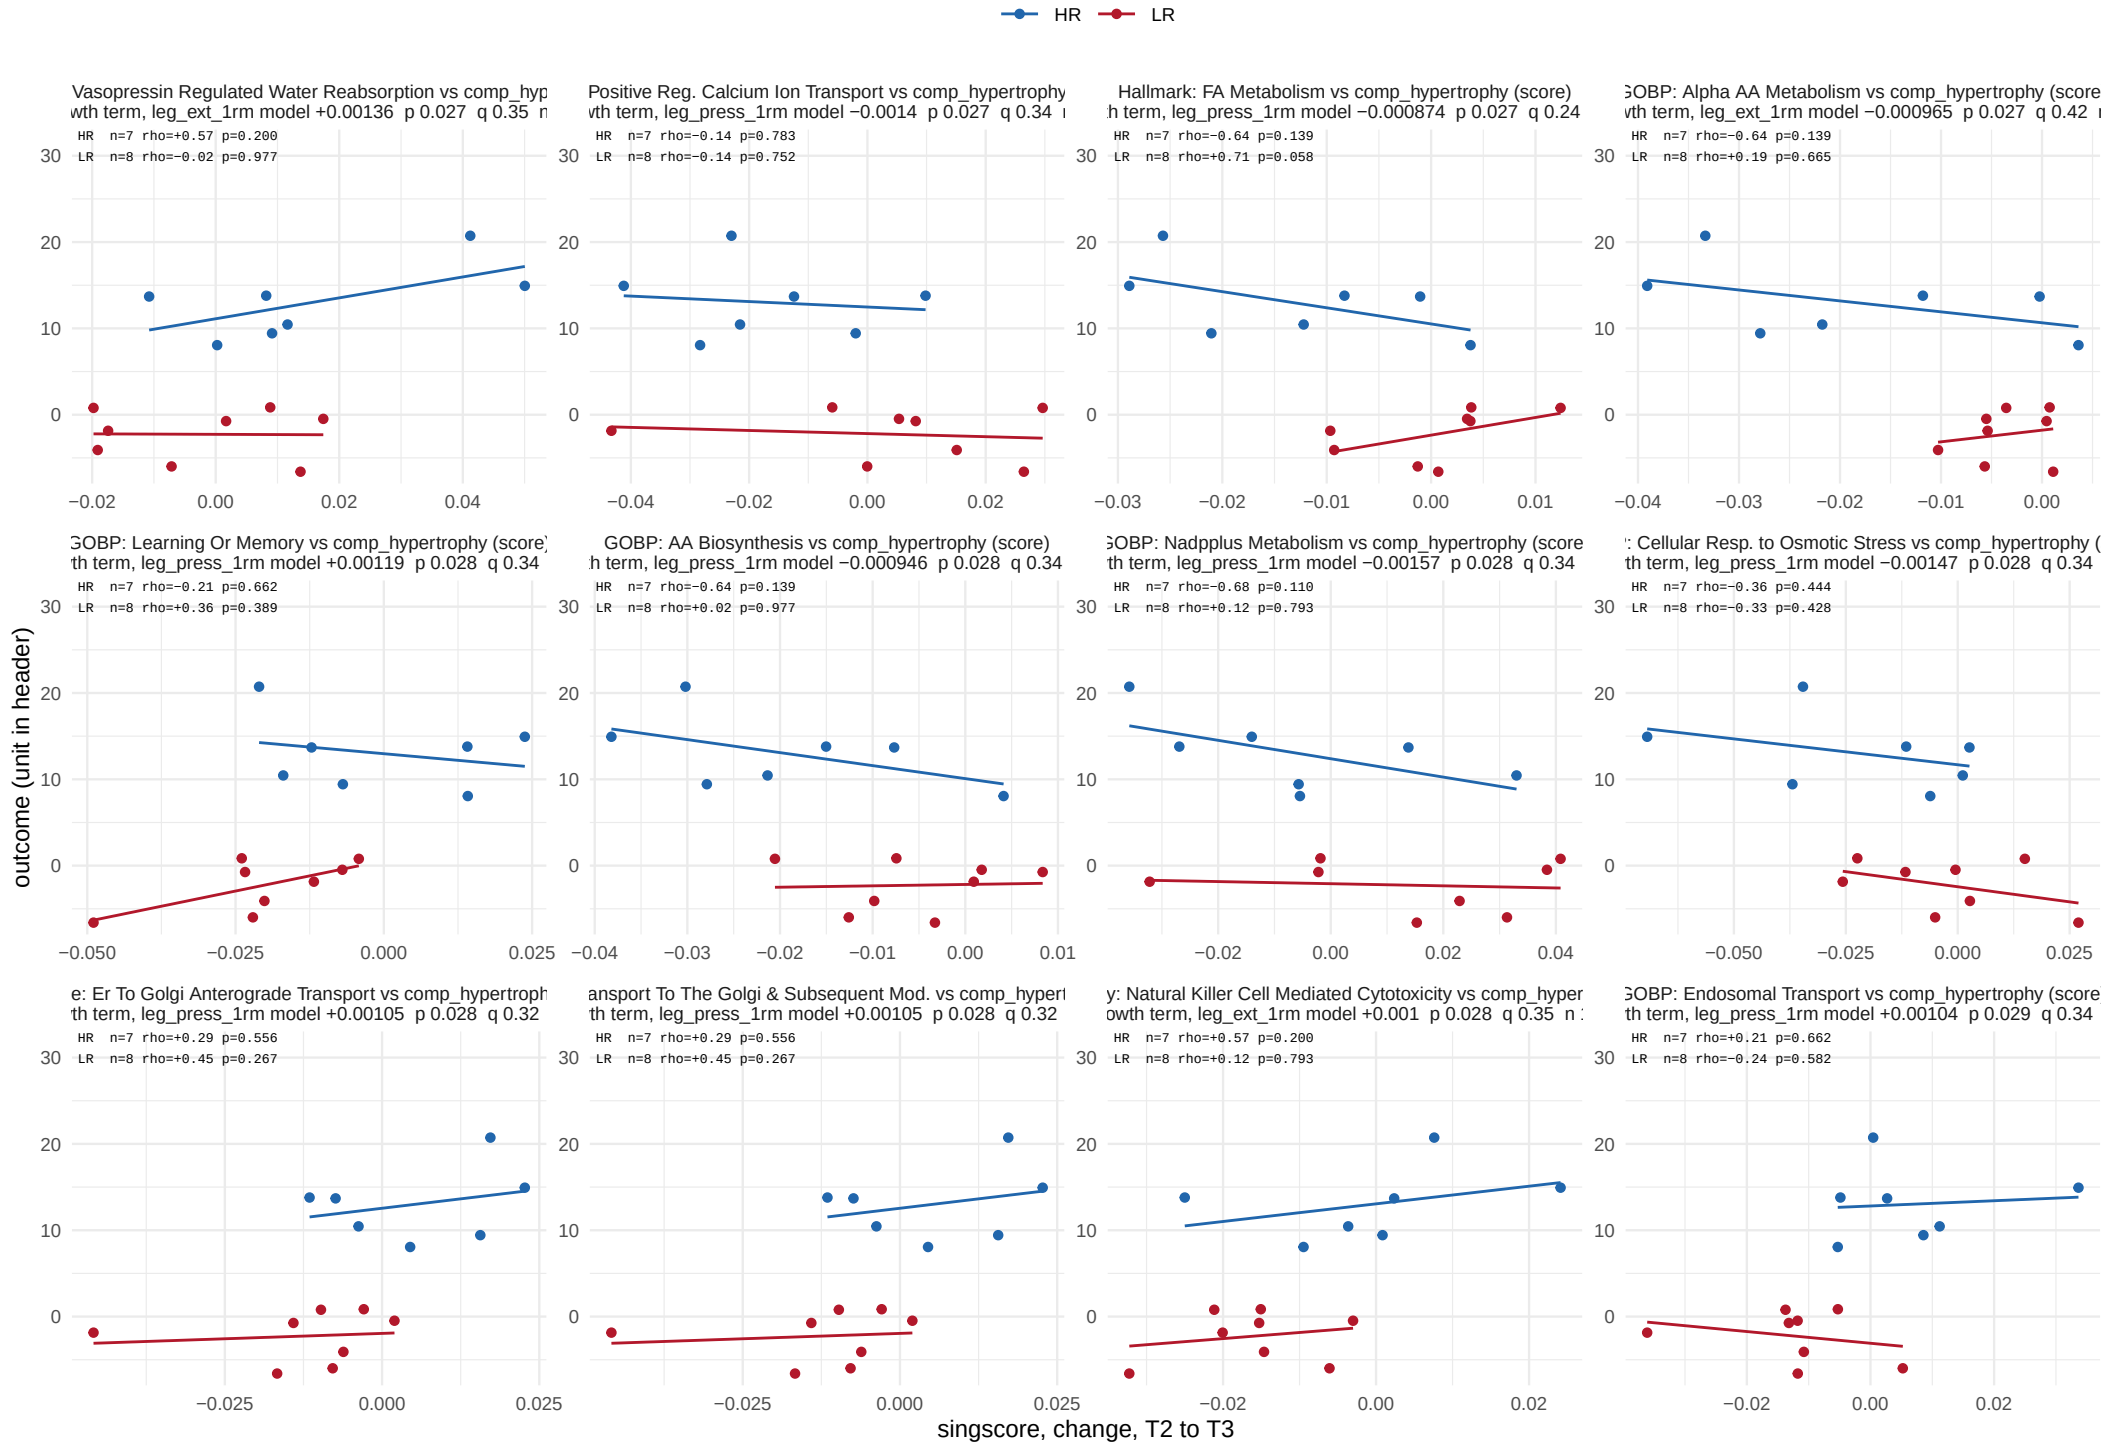


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

## Two predictor, acute window


334 of 5512 feature−outcome pairs at p < 0.05, 6 at BH < 0.05. Page 18 of 28.

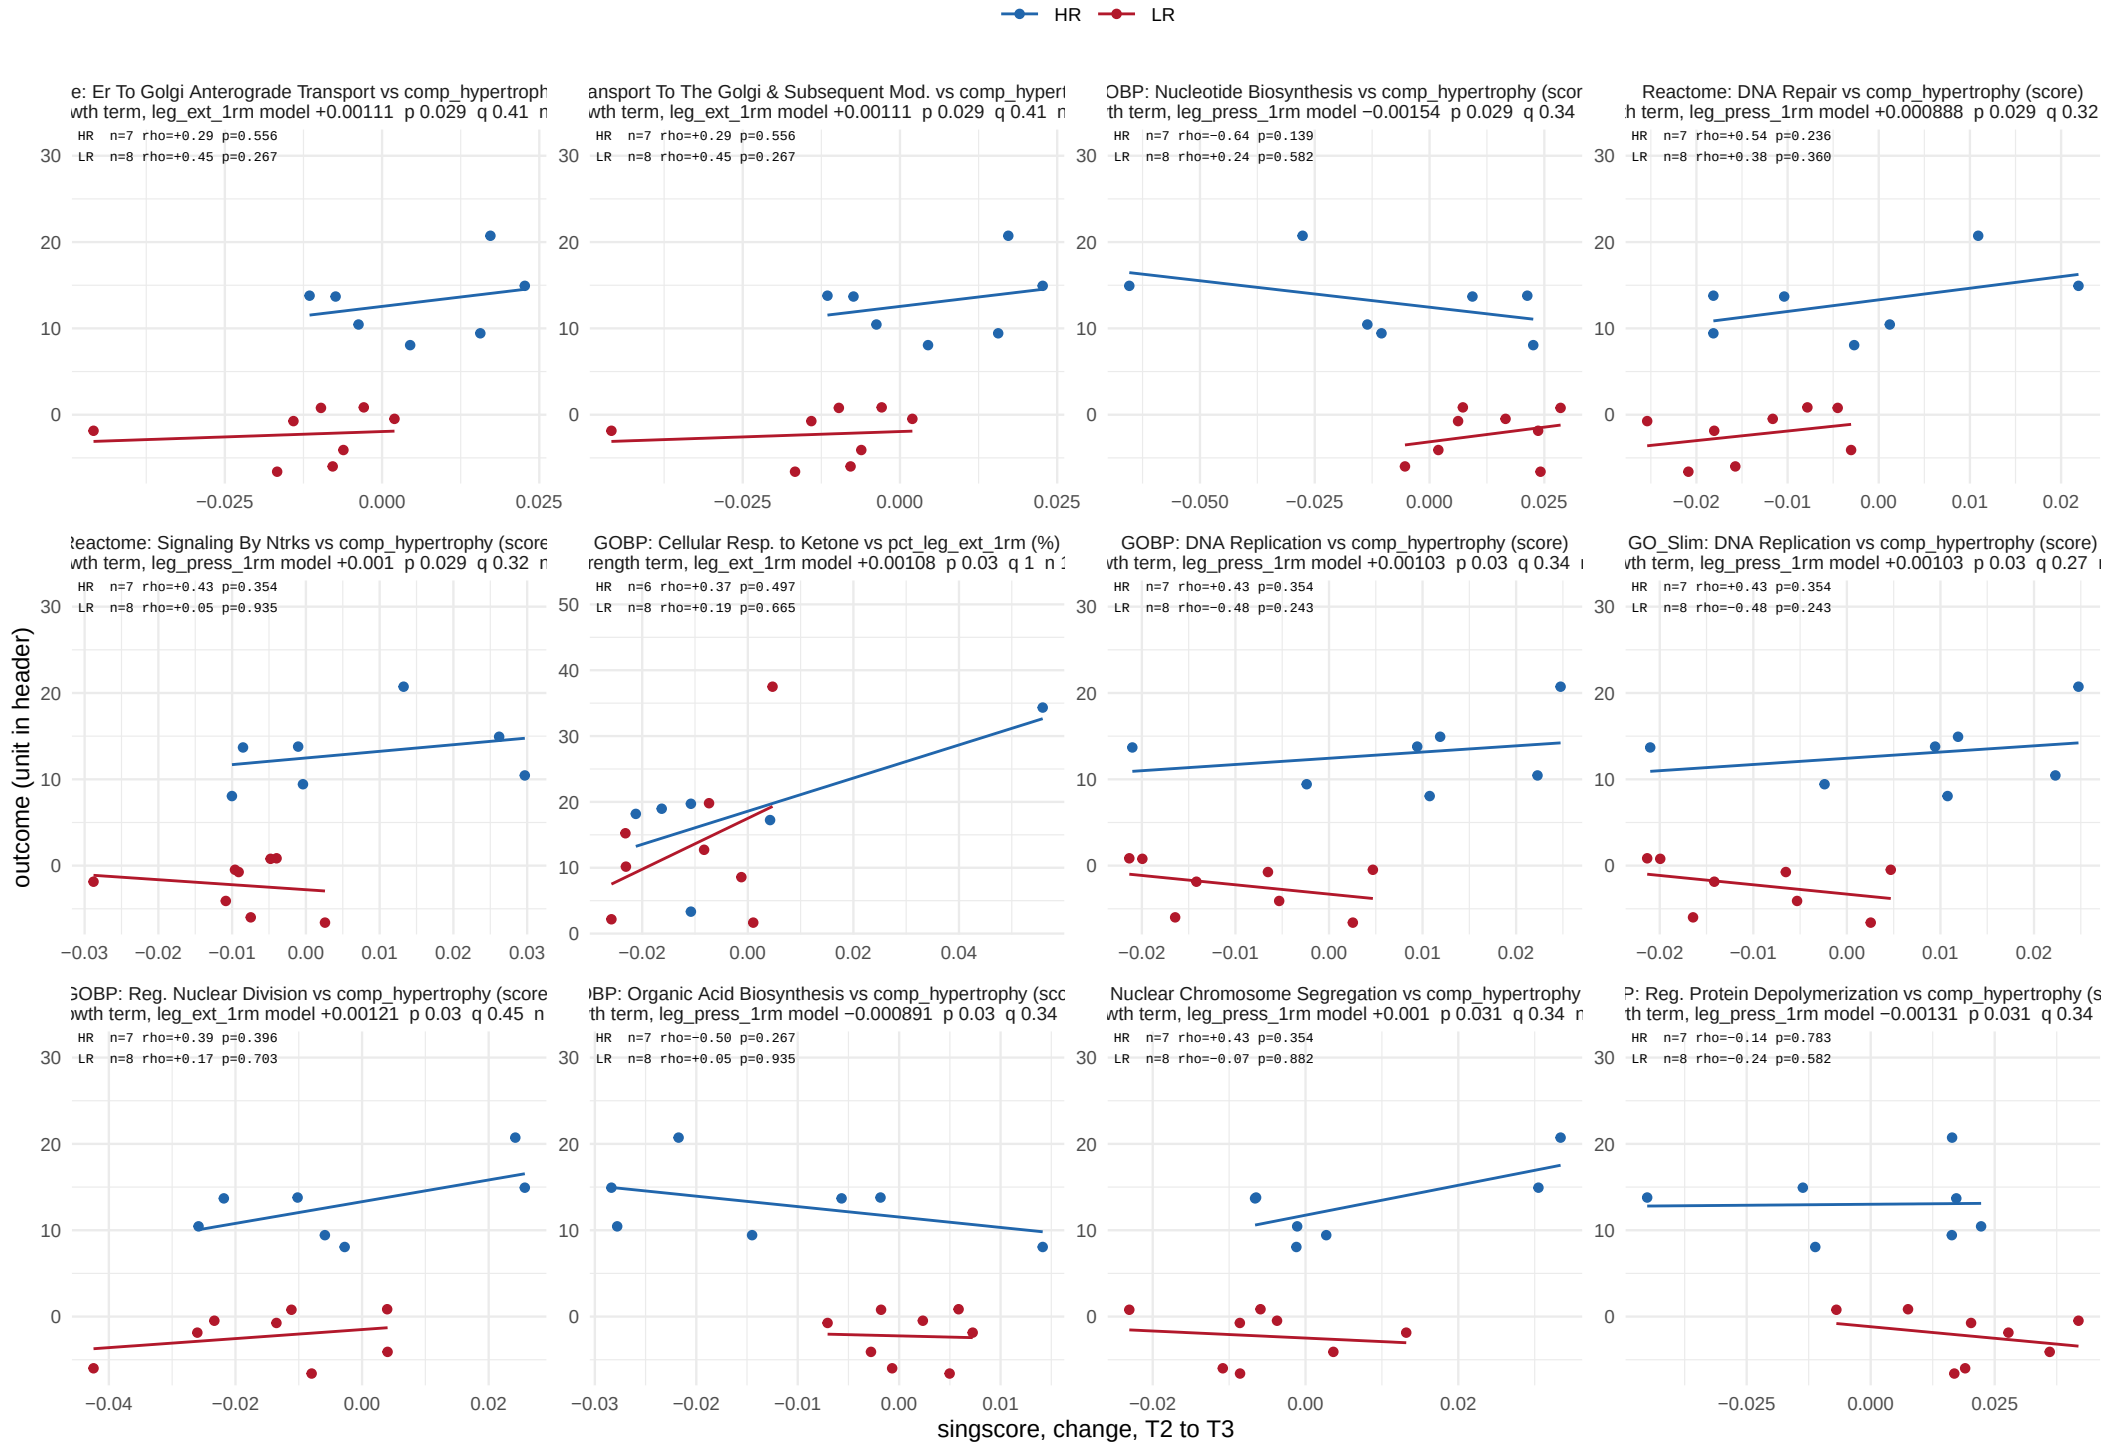


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

## Two predictor, acute window


334 of 5512 feature−outcome pairs at p < 0.05, 6 at BH < 0.05. Page 19 of 28.

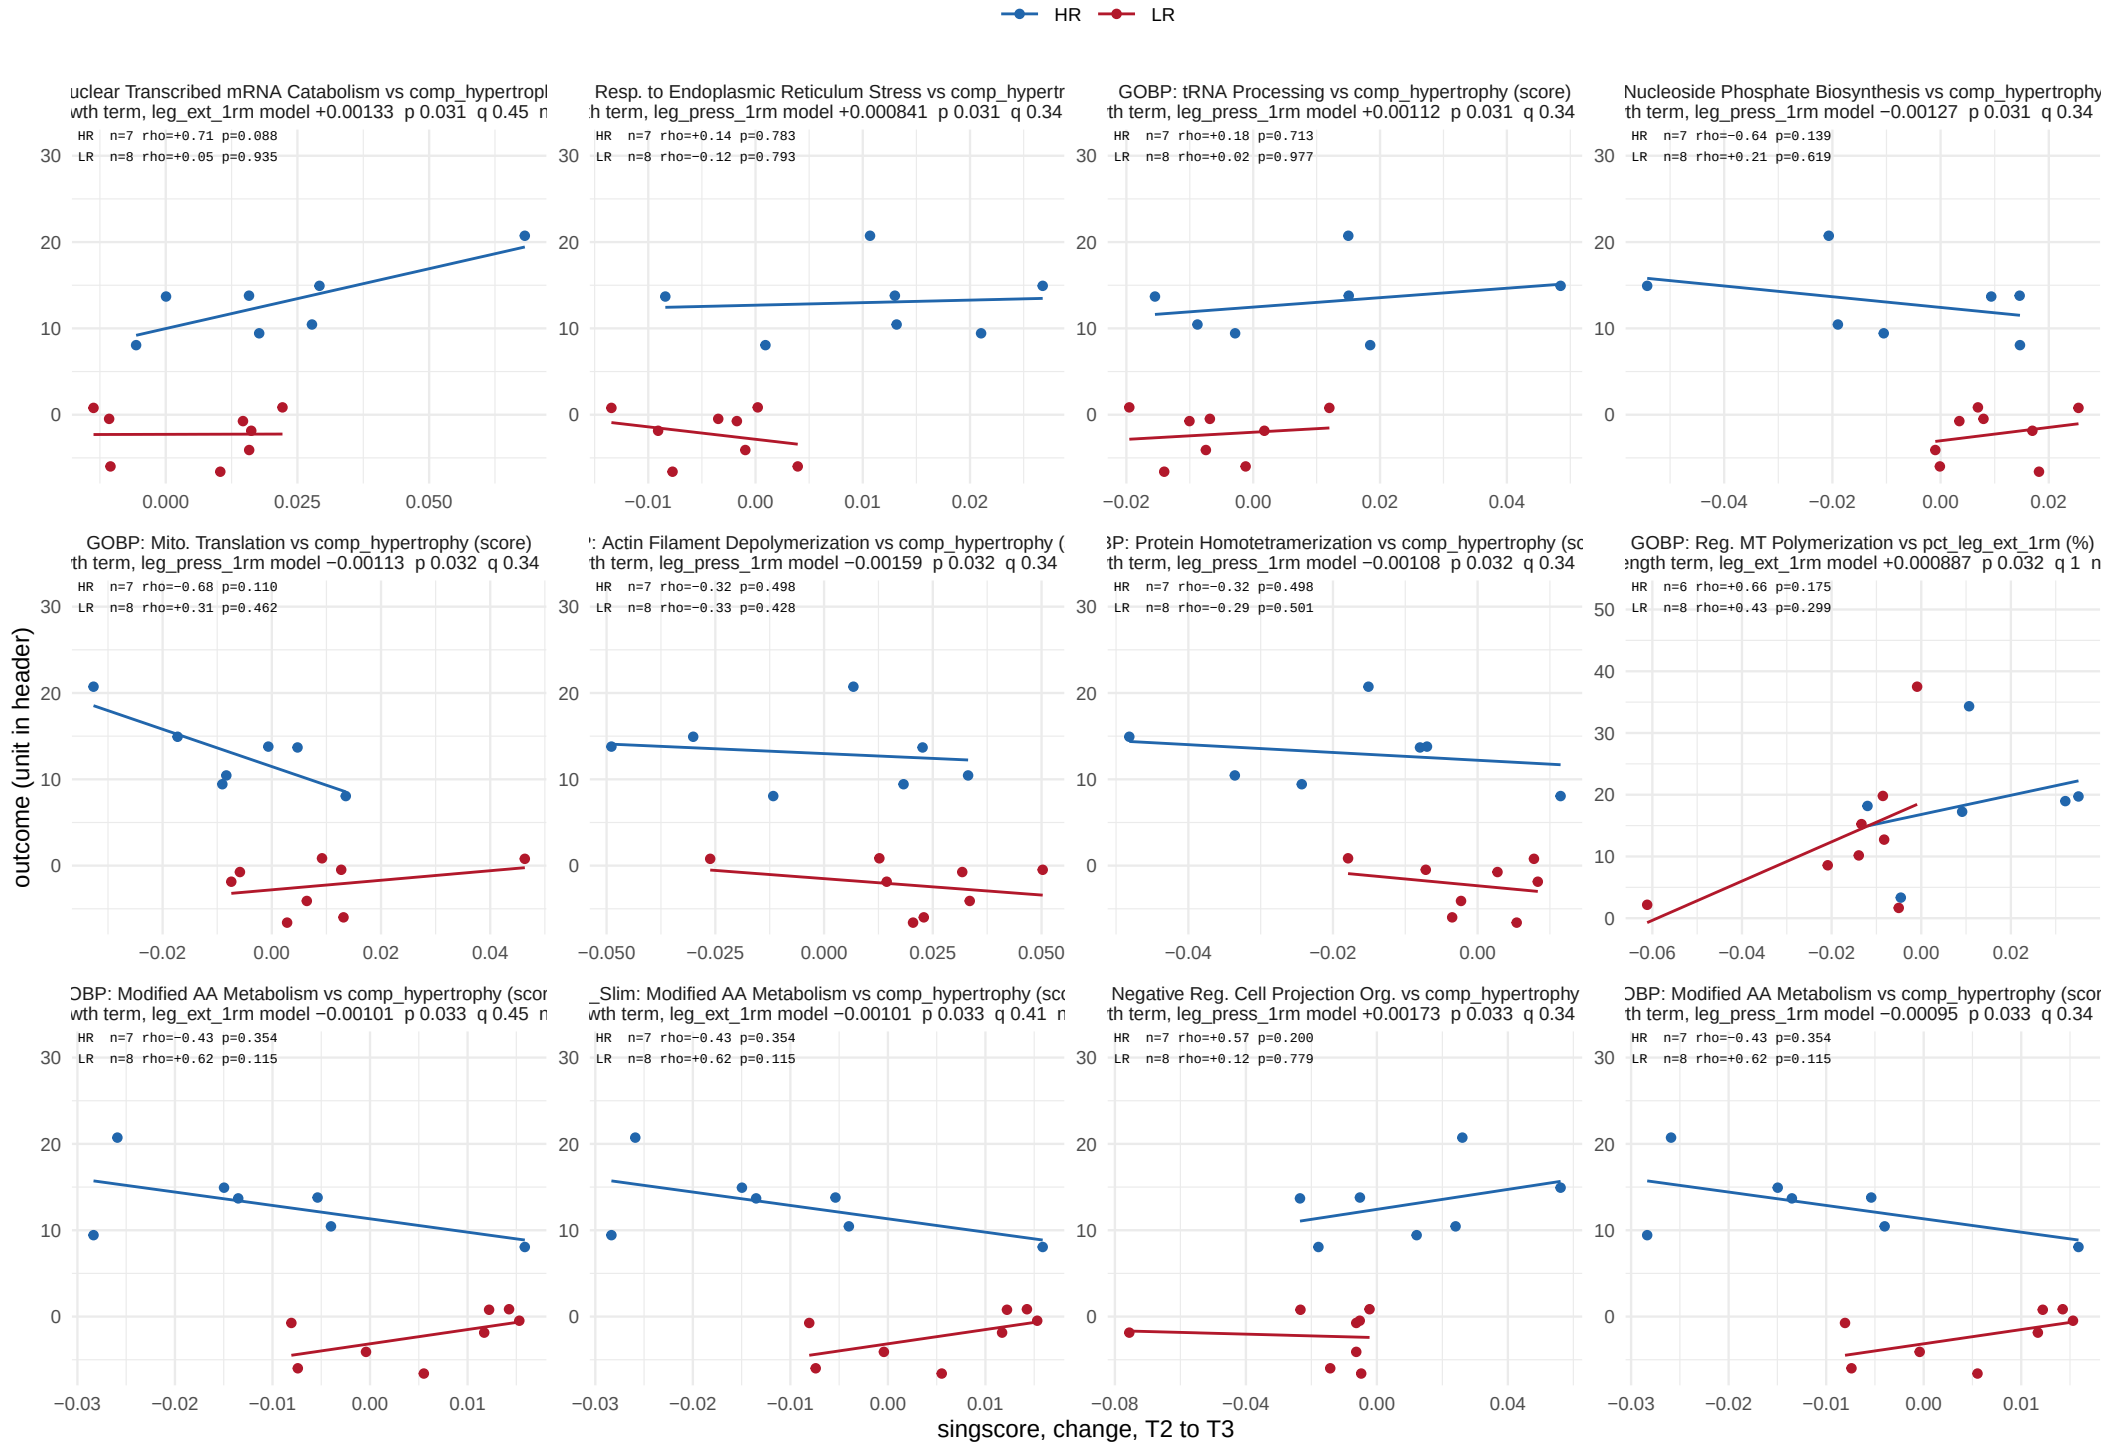



One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

## Two predictor, acute window

334 of 5512 feature−outcome pairs at p < 0.05, 6 at BH < 0.05. Page 20 of 28.

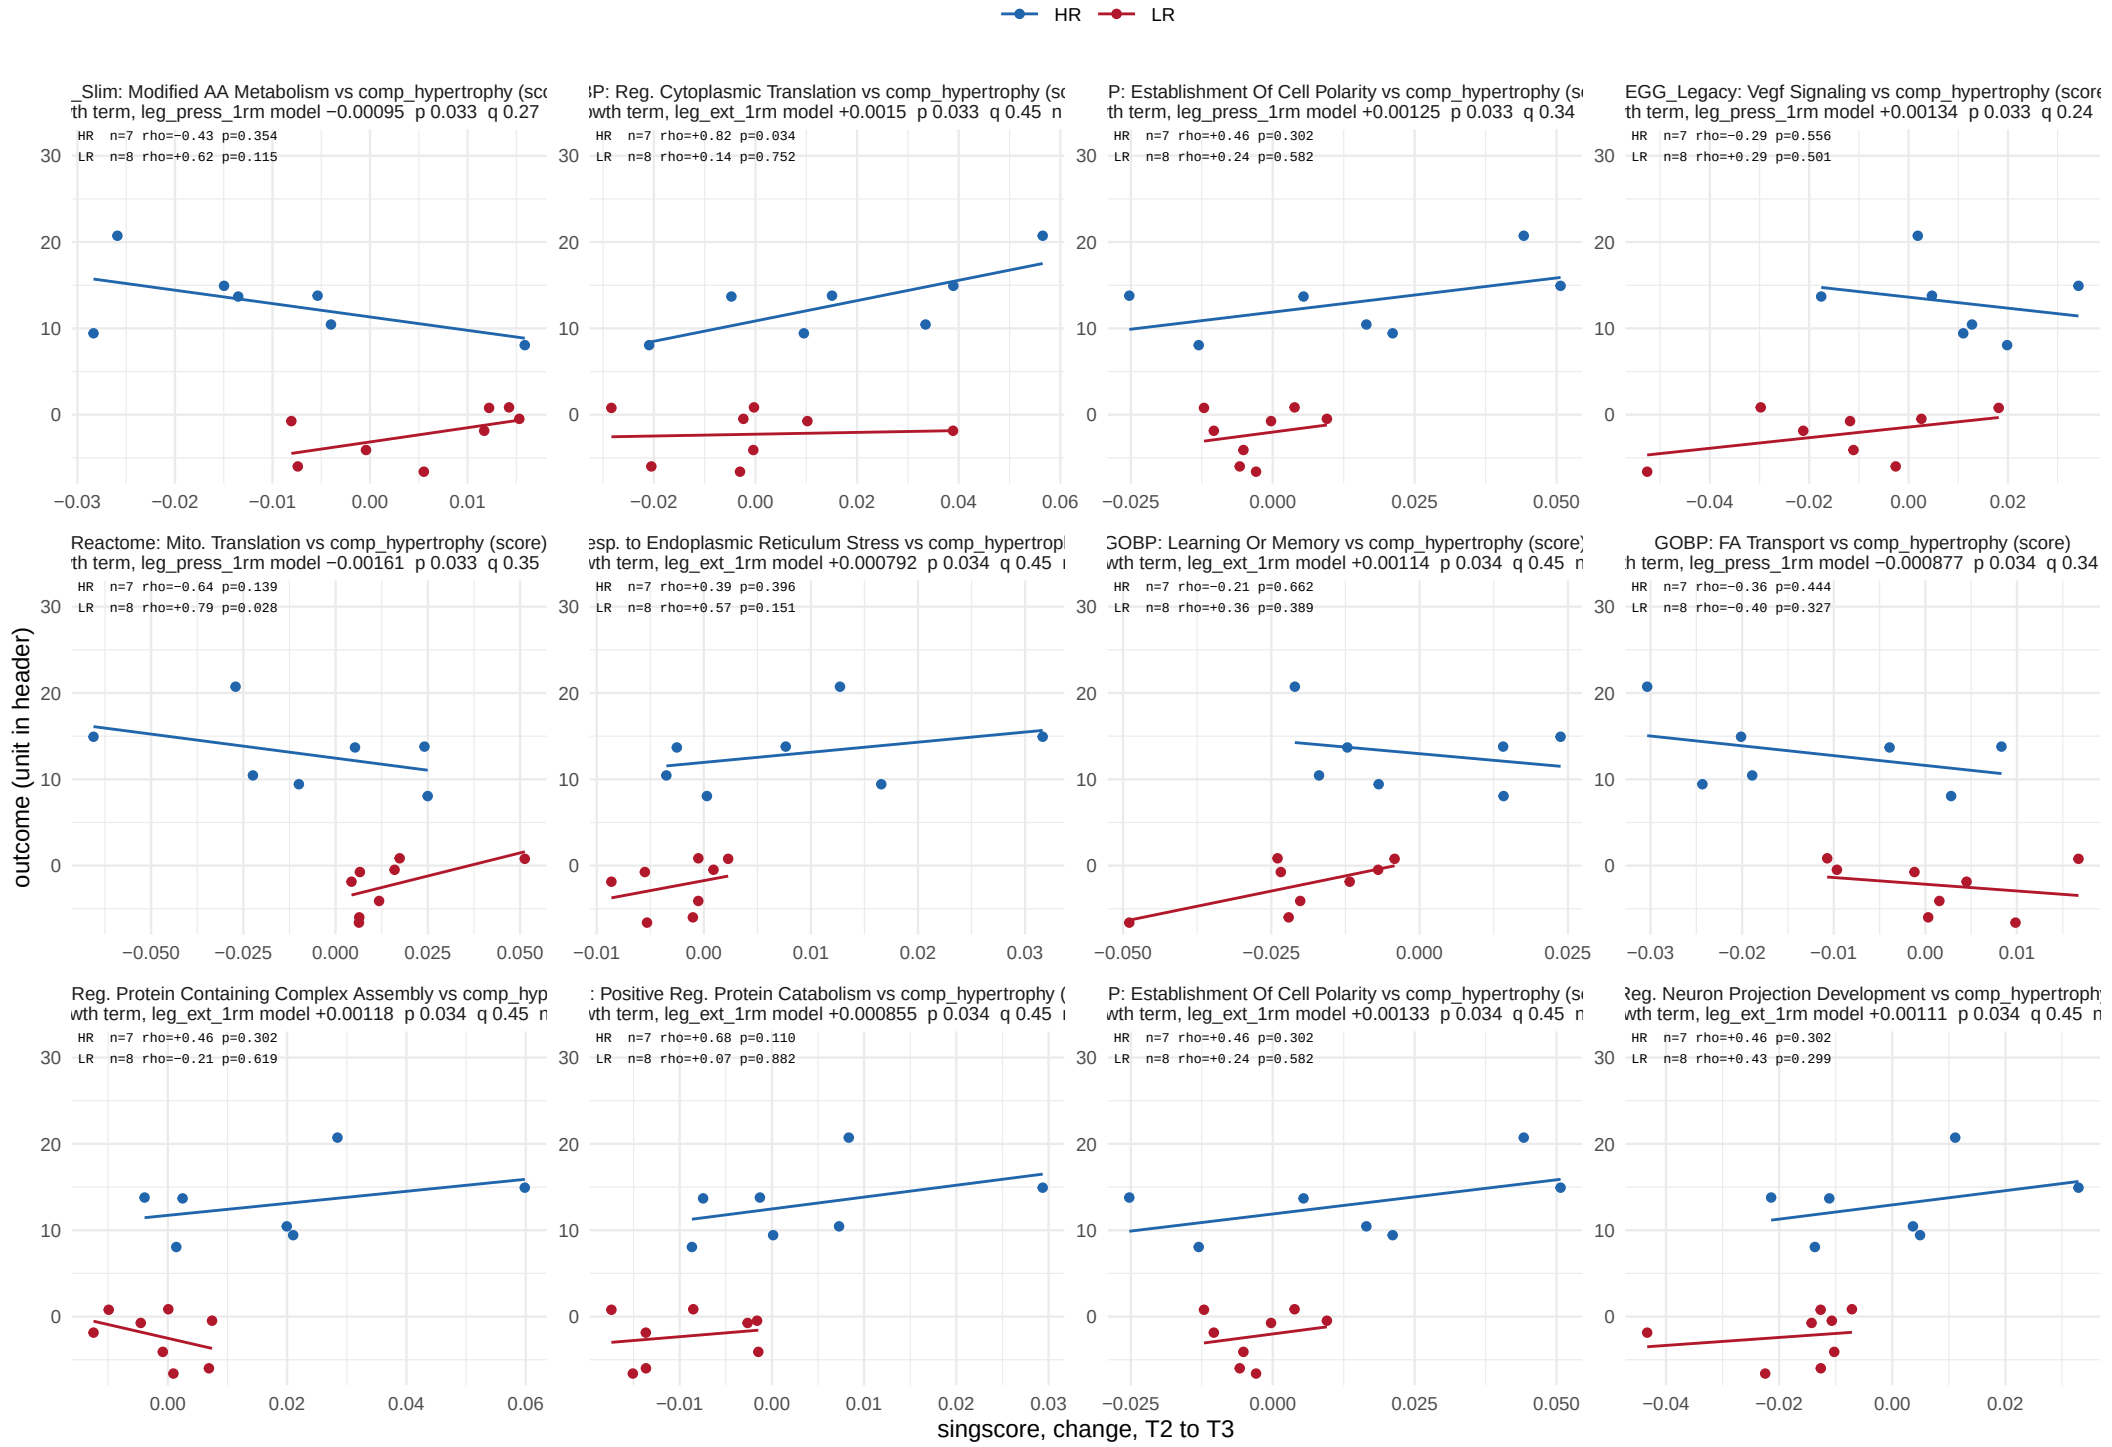



One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

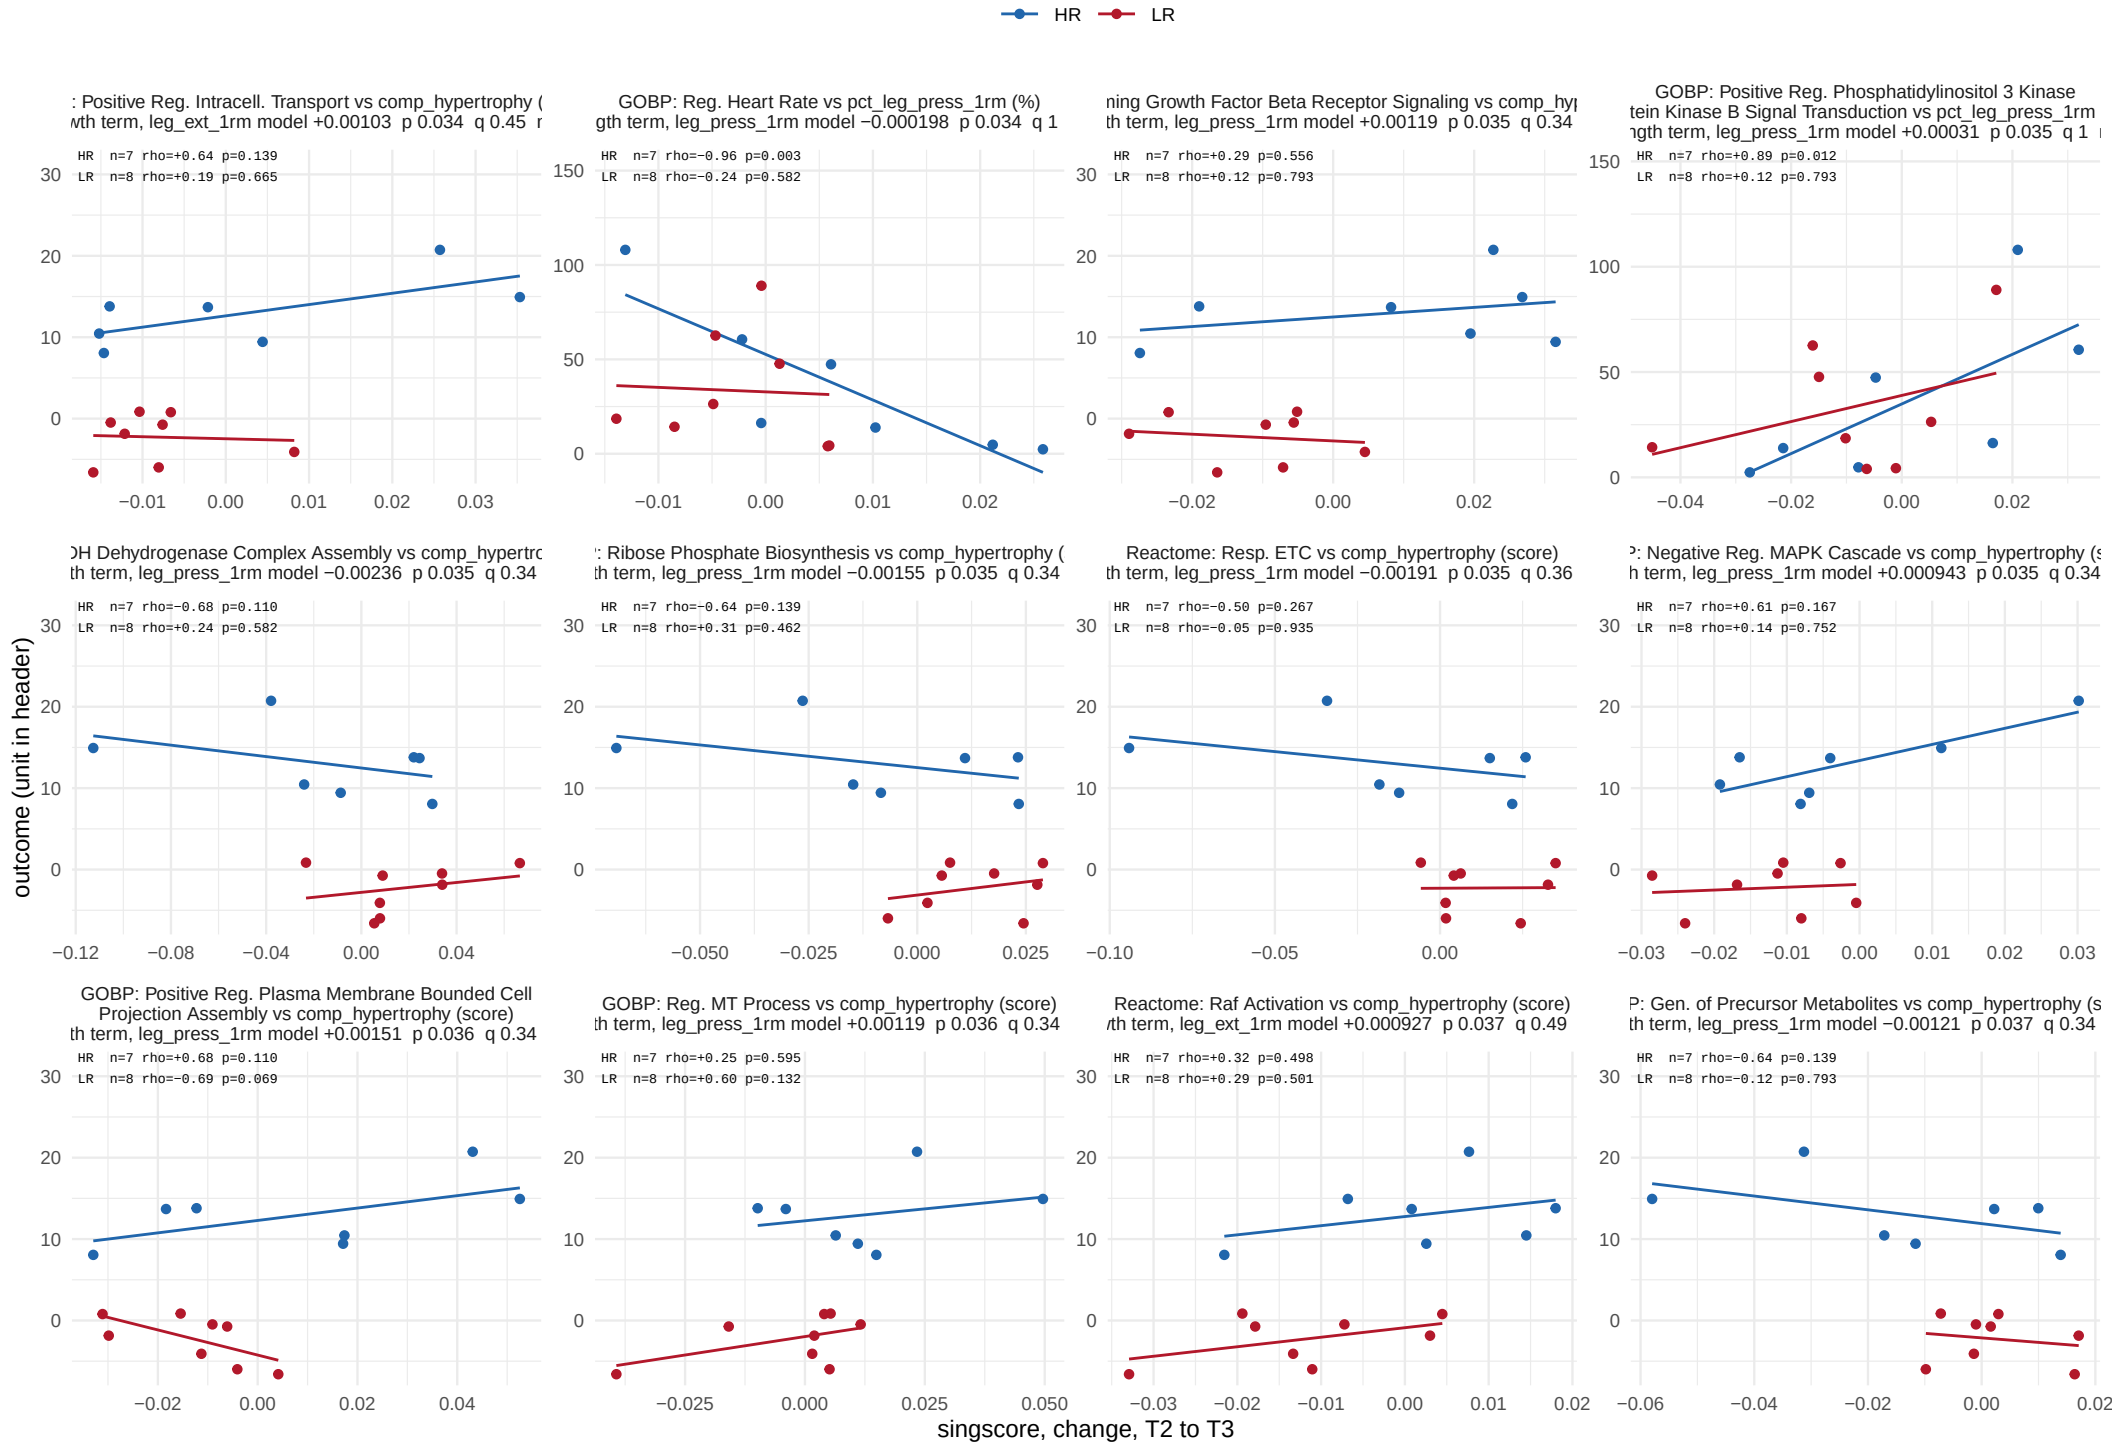


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

## Two predictor, acute window


334 of 5512 feature−outcome pairs at p < 0.05, 6 at BH < 0.05. Page 22 of 28.

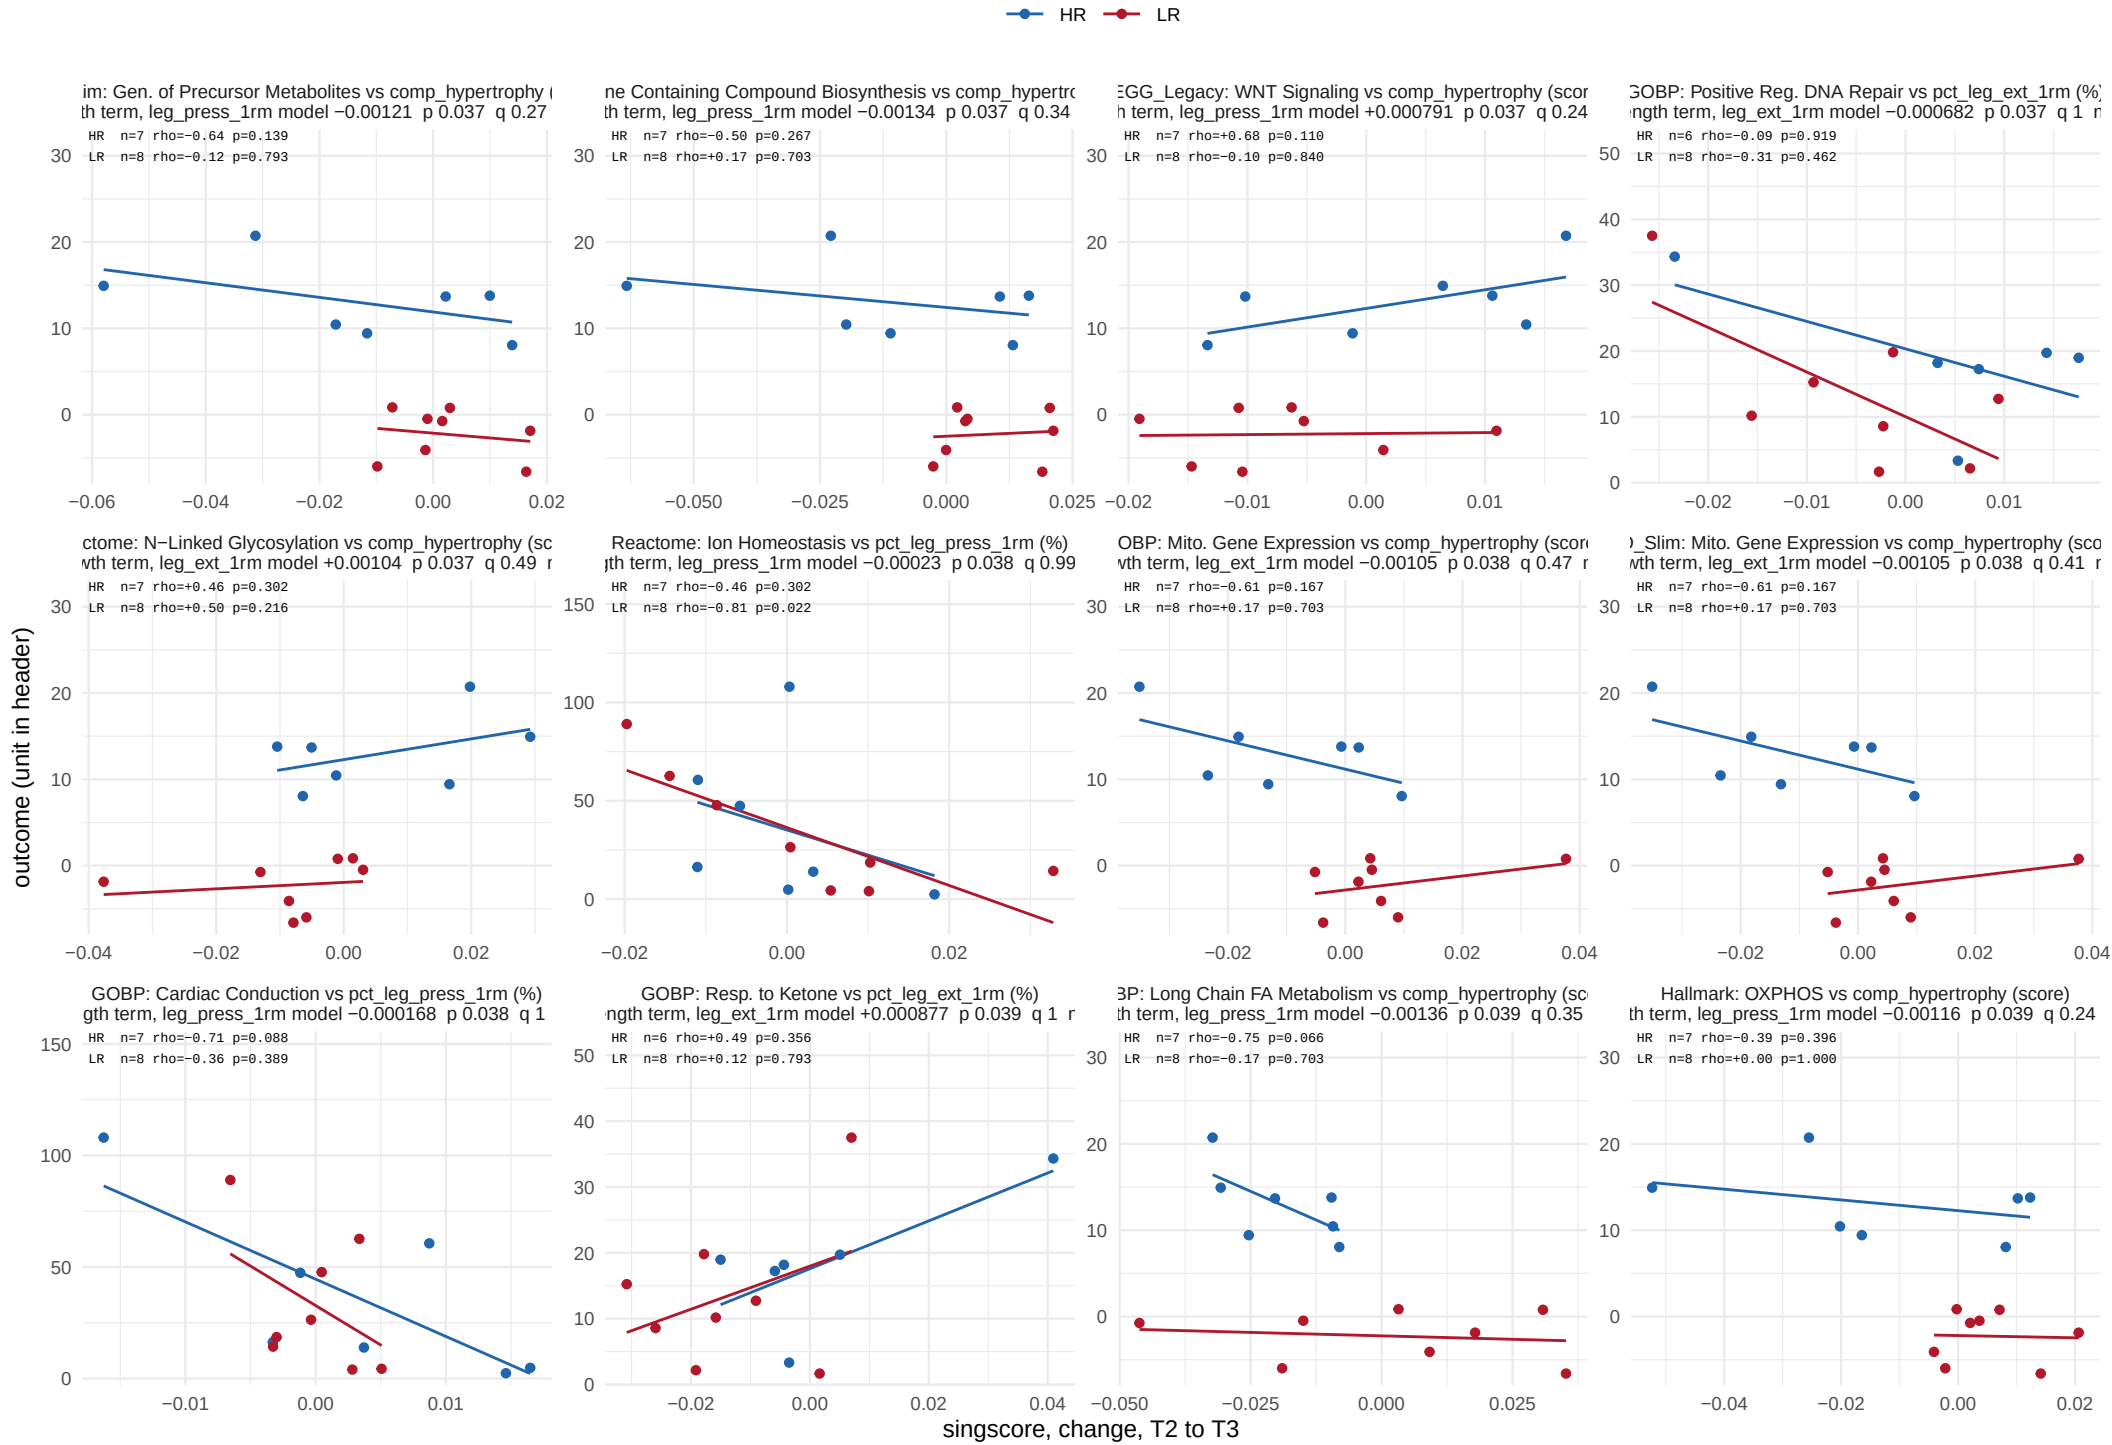


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

## Two predictor, acute window


334 of 5512 feature−outcome pairs at p < 0.05, 6 at BH < 0.05. Page 23 of 28.

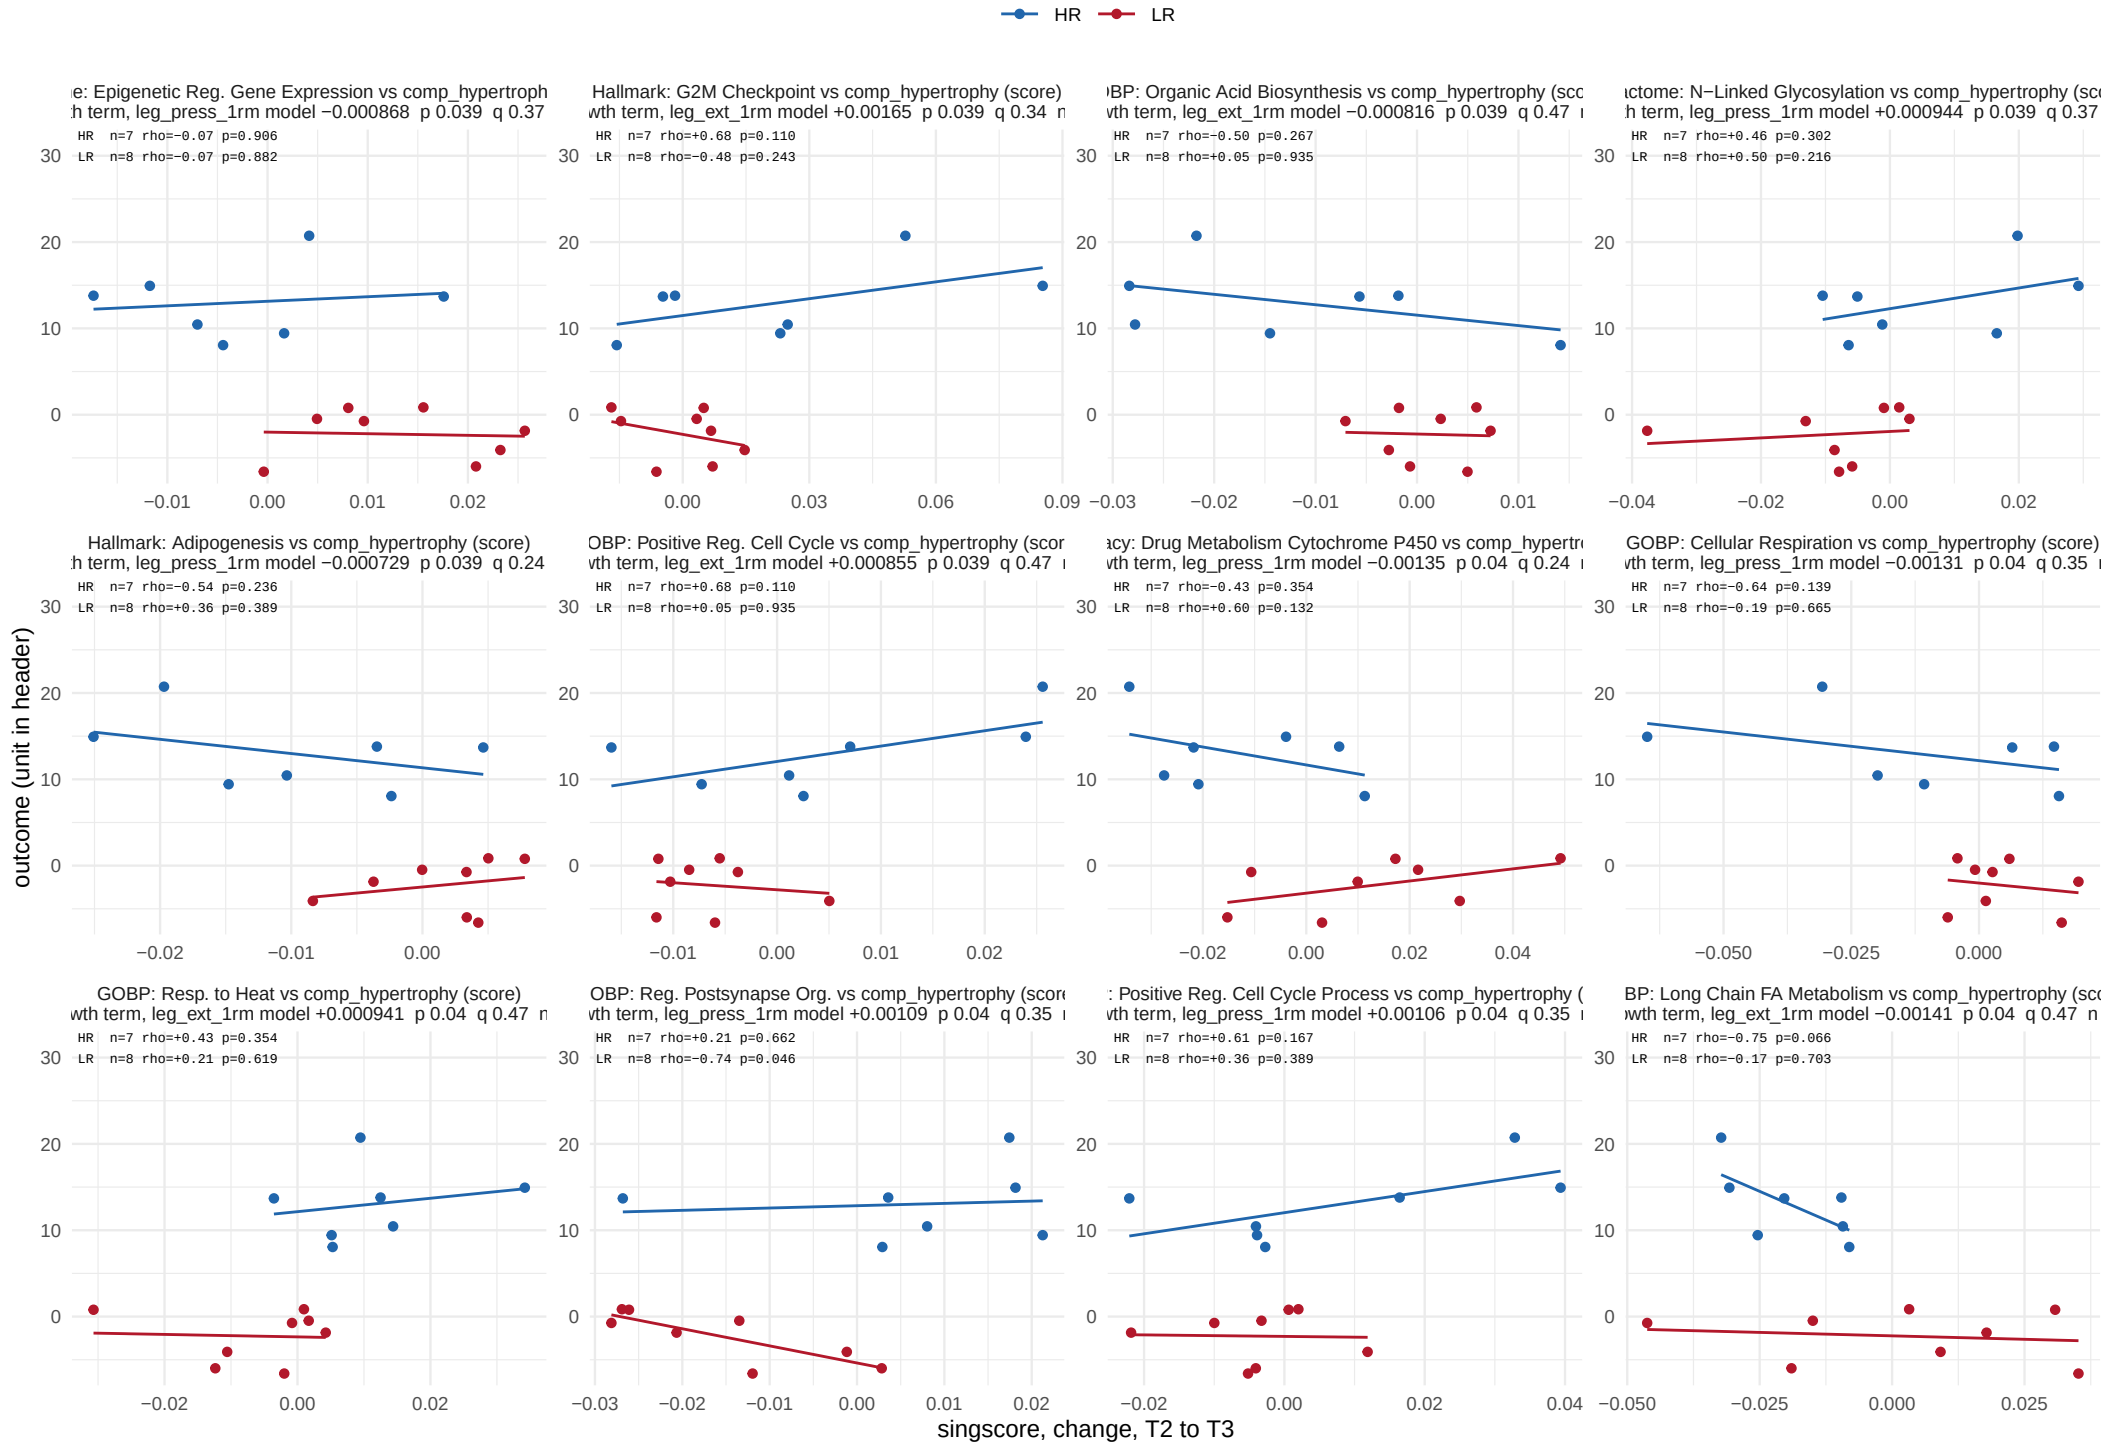


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

## Two predictor, acute window


334 of 5512 feature−outcome pairs at p < 0.05, 6 at BH < 0.05. Page 24 of 28.

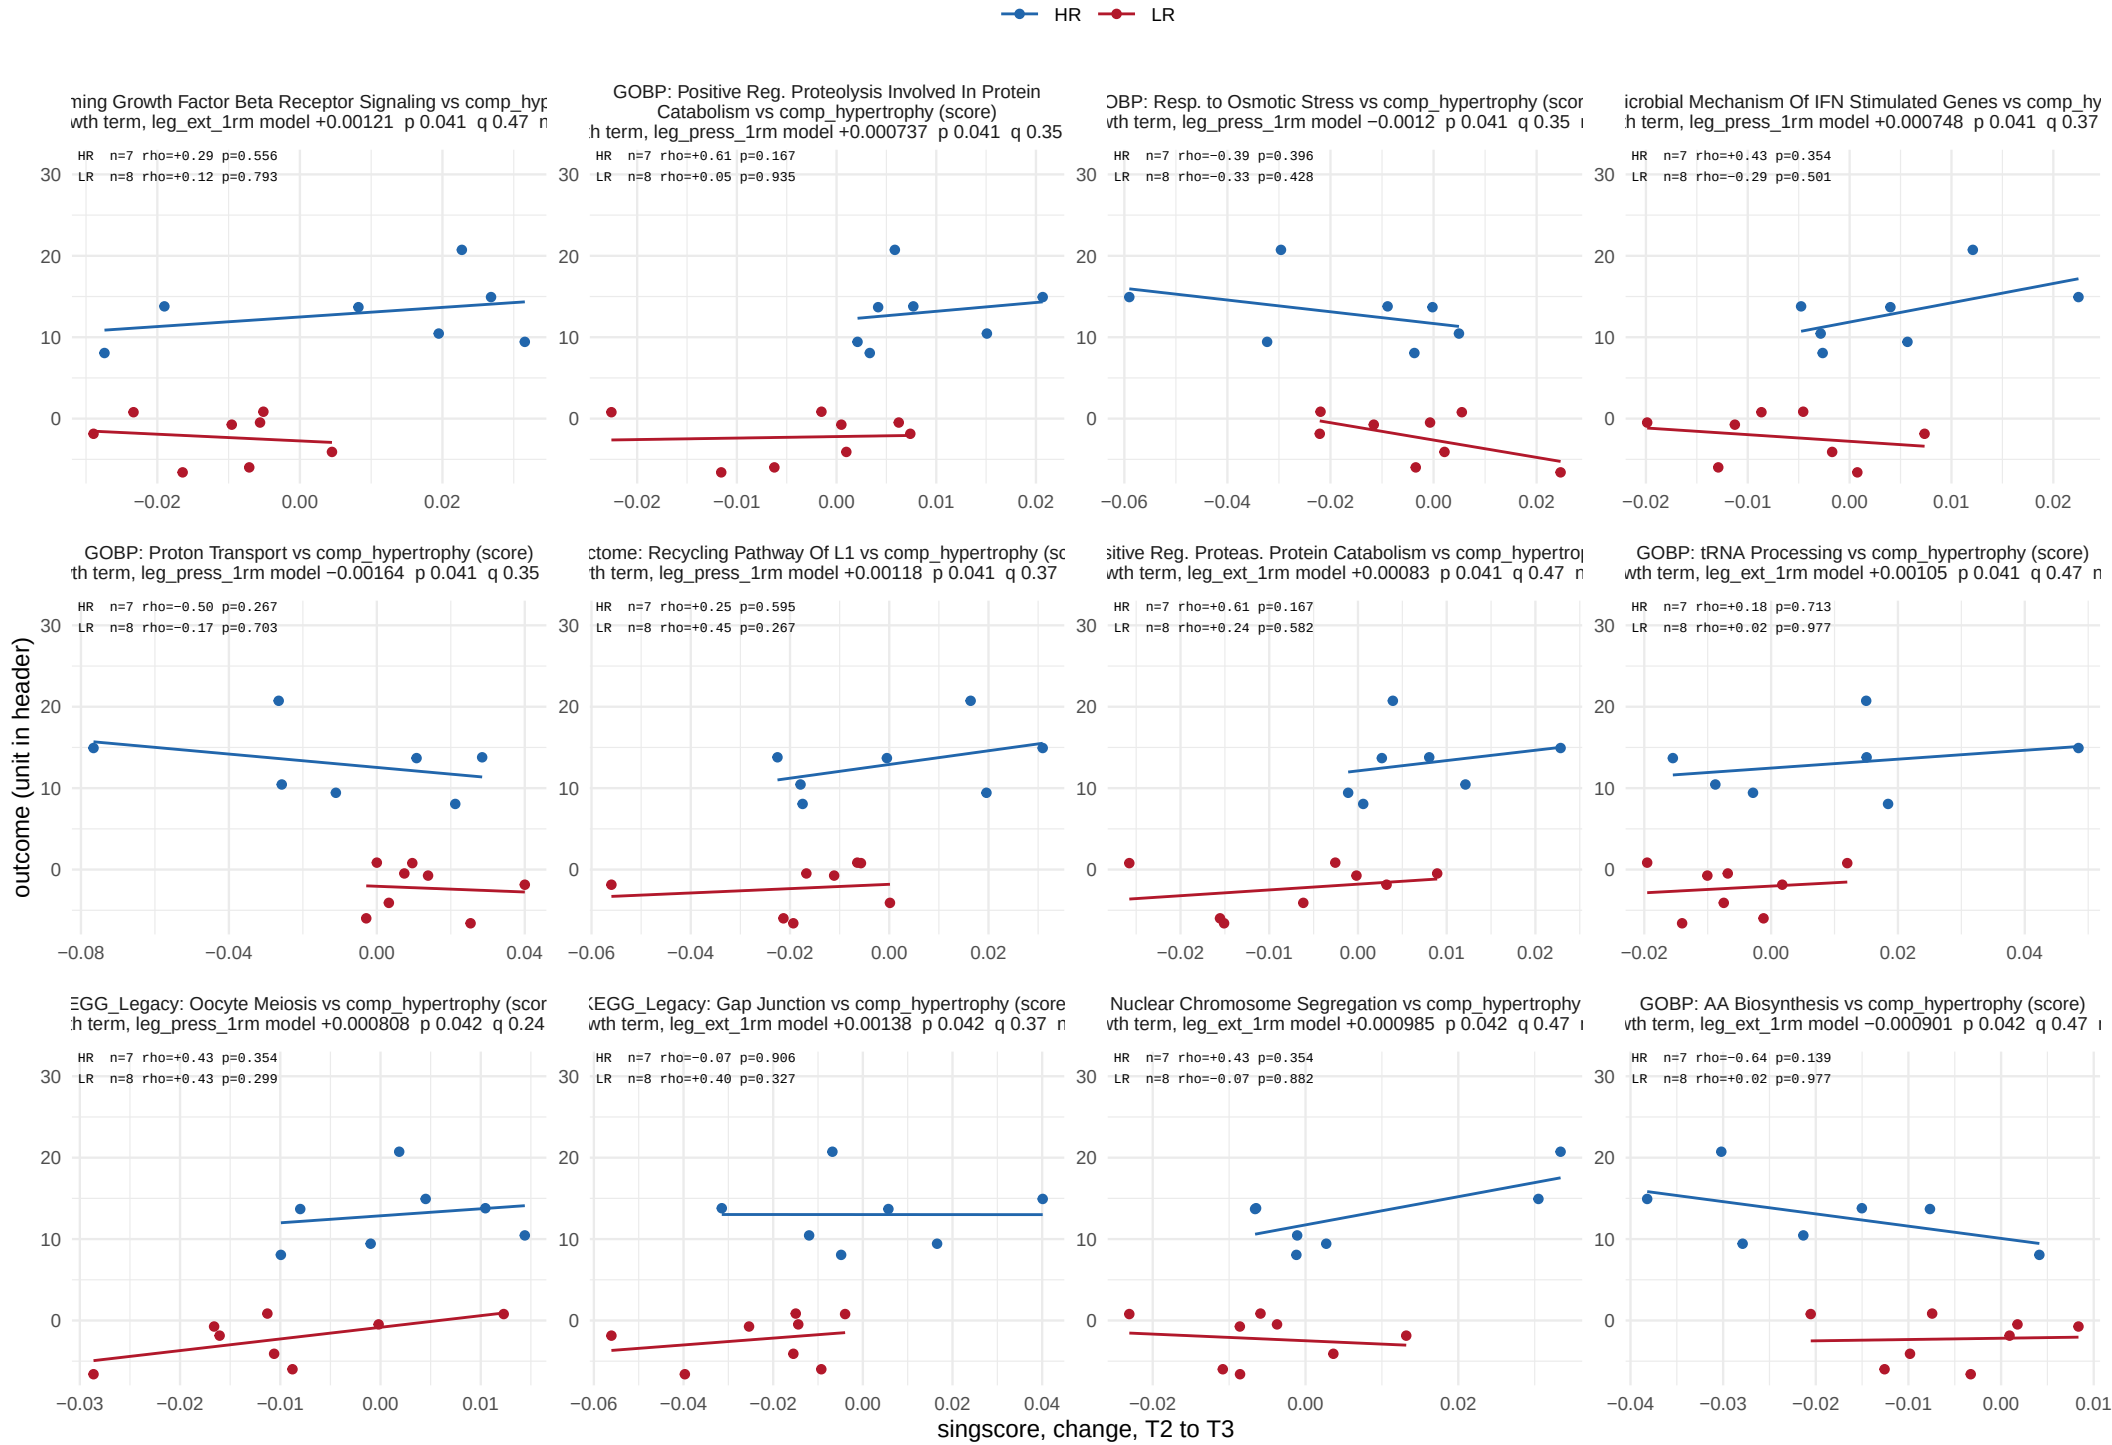


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

## Two predictor, acute window


334 of 5512 feature−outcome pairs at p < 0.05, 6 at BH < 0.05. Page 25 of 28.

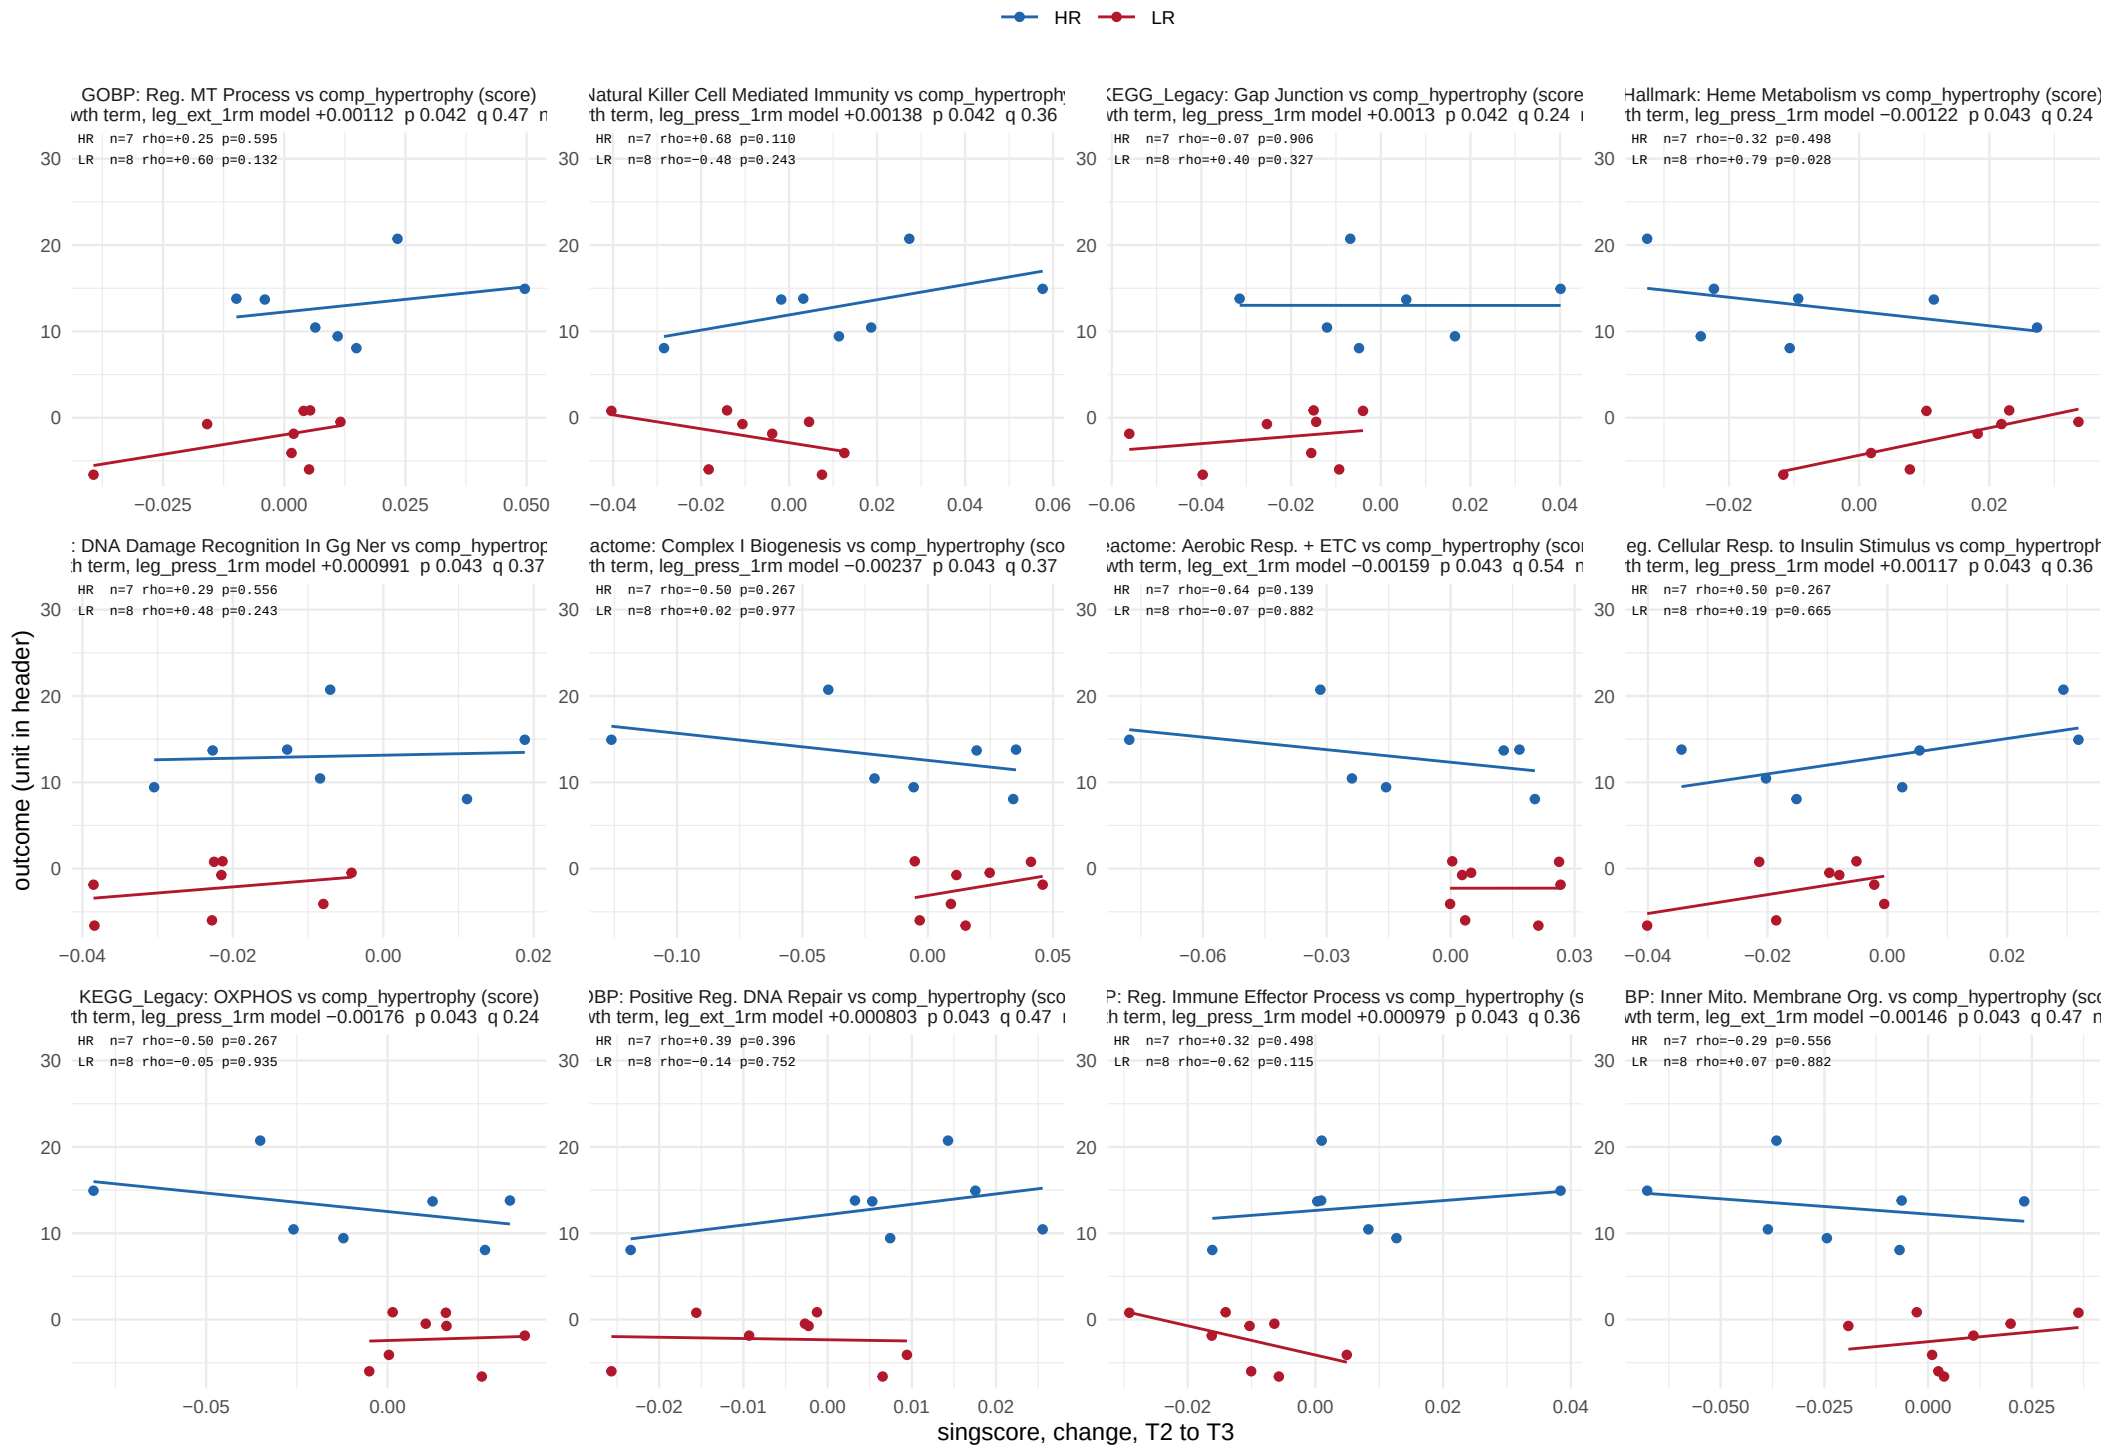


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

## Two predictor, acute window


334 of 5512 feature−outcome pairs at p < 0.05, 6 at BH < 0.05. Page 26 of 28.

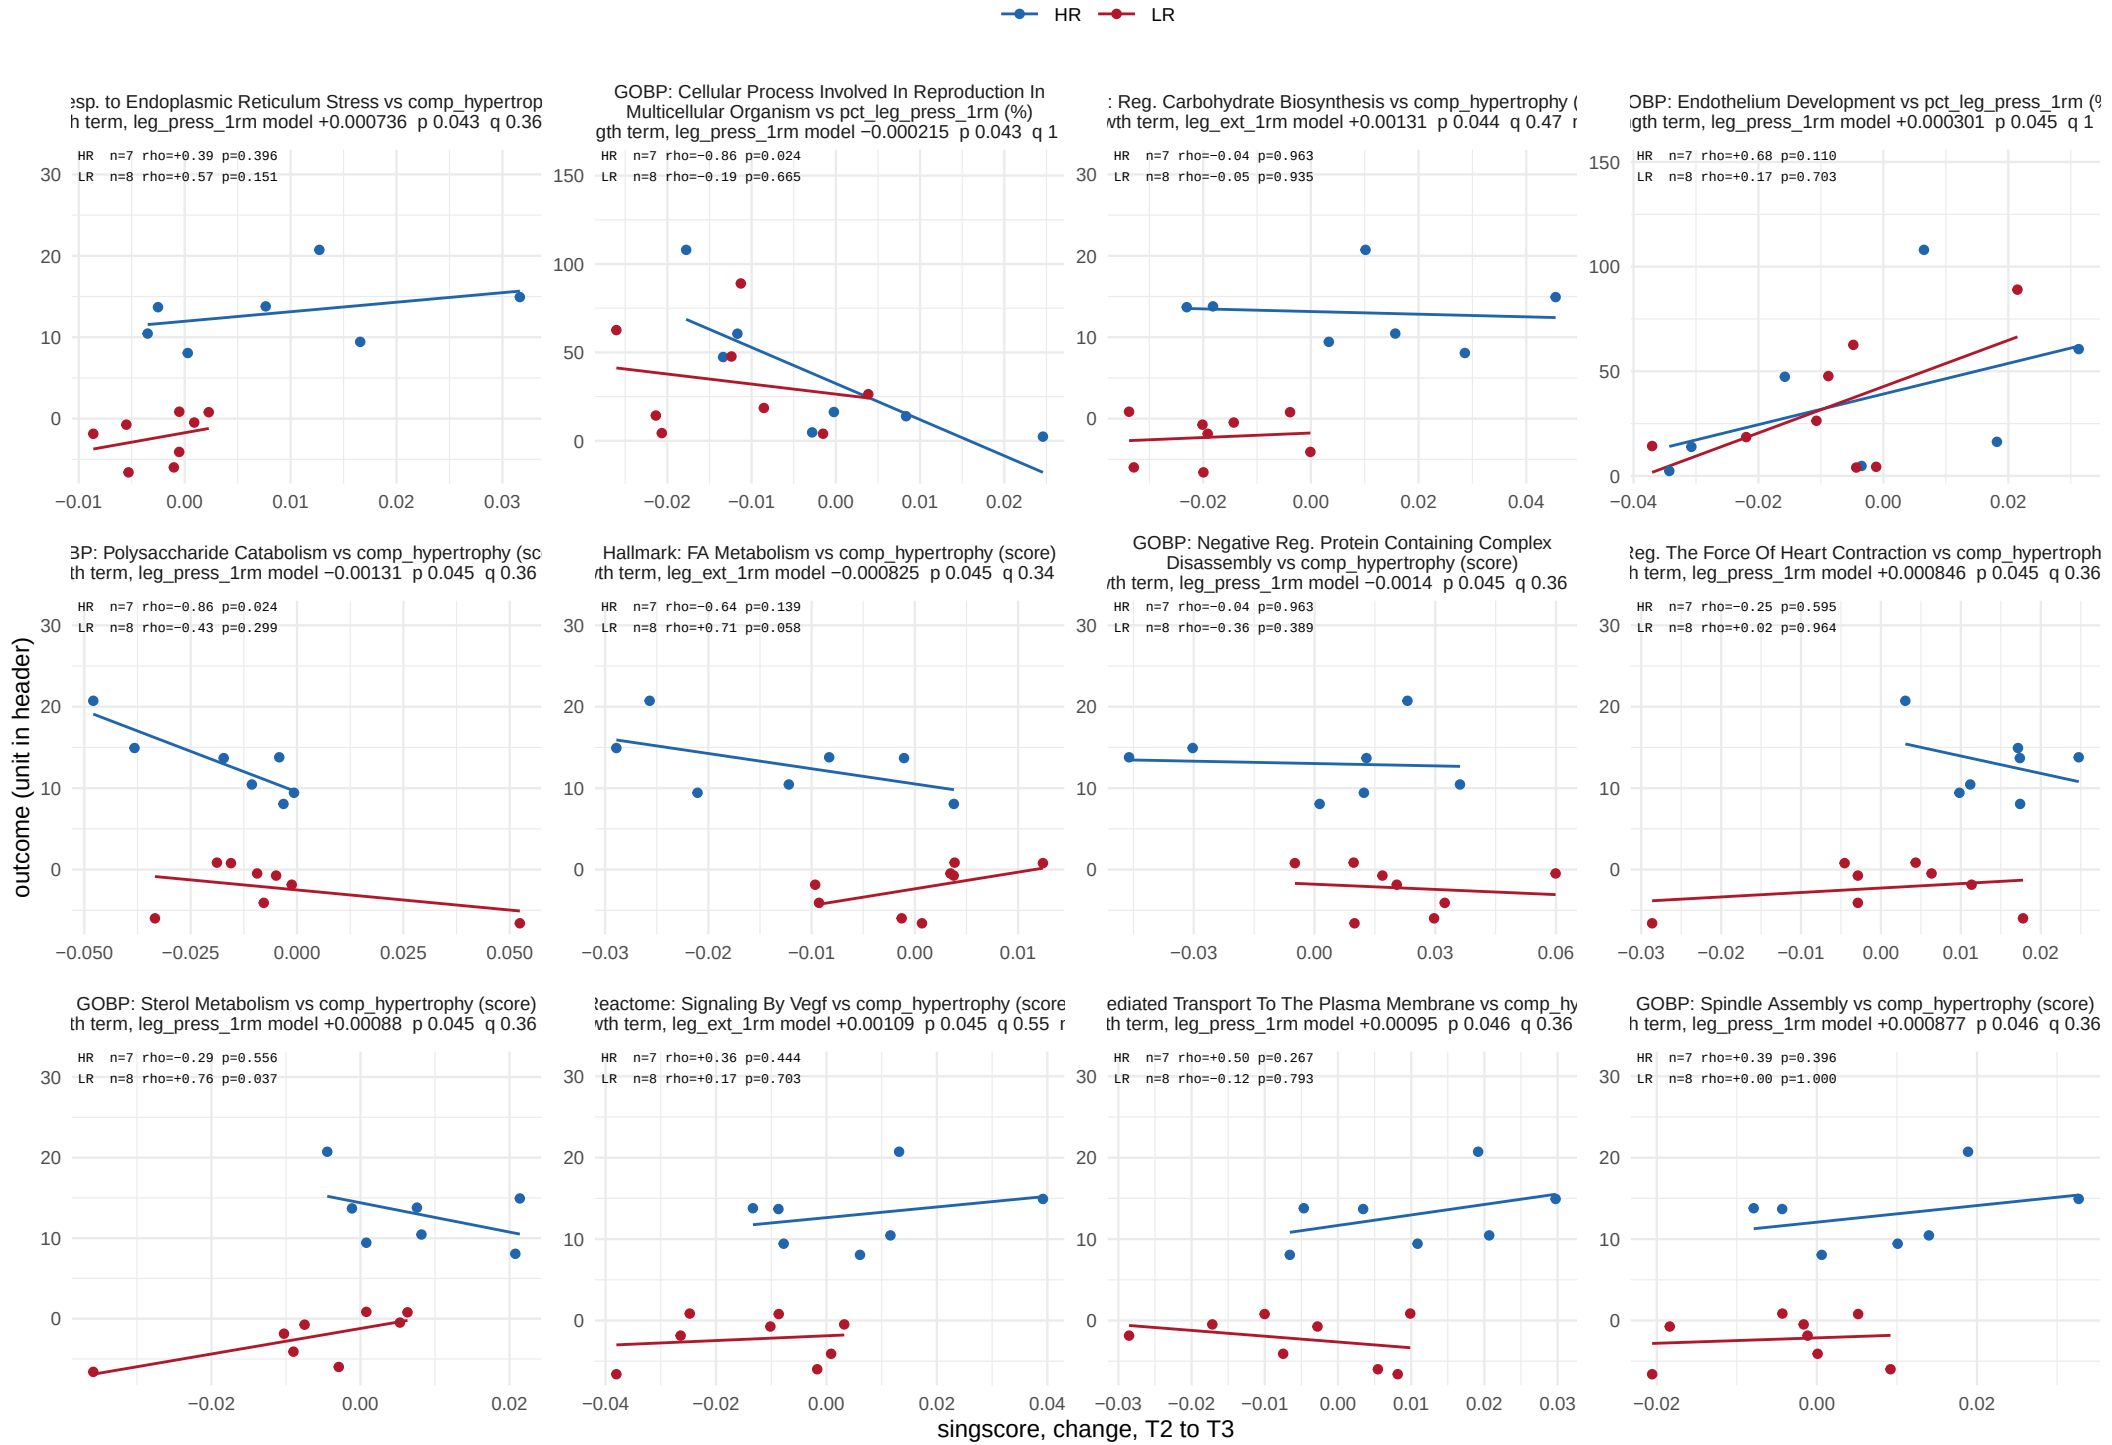


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

# Two predictor, acute window


334 of 5512 feature−outcome pairs at p < 0.05, 6 at BH < 0.05. Page 27 of 28.

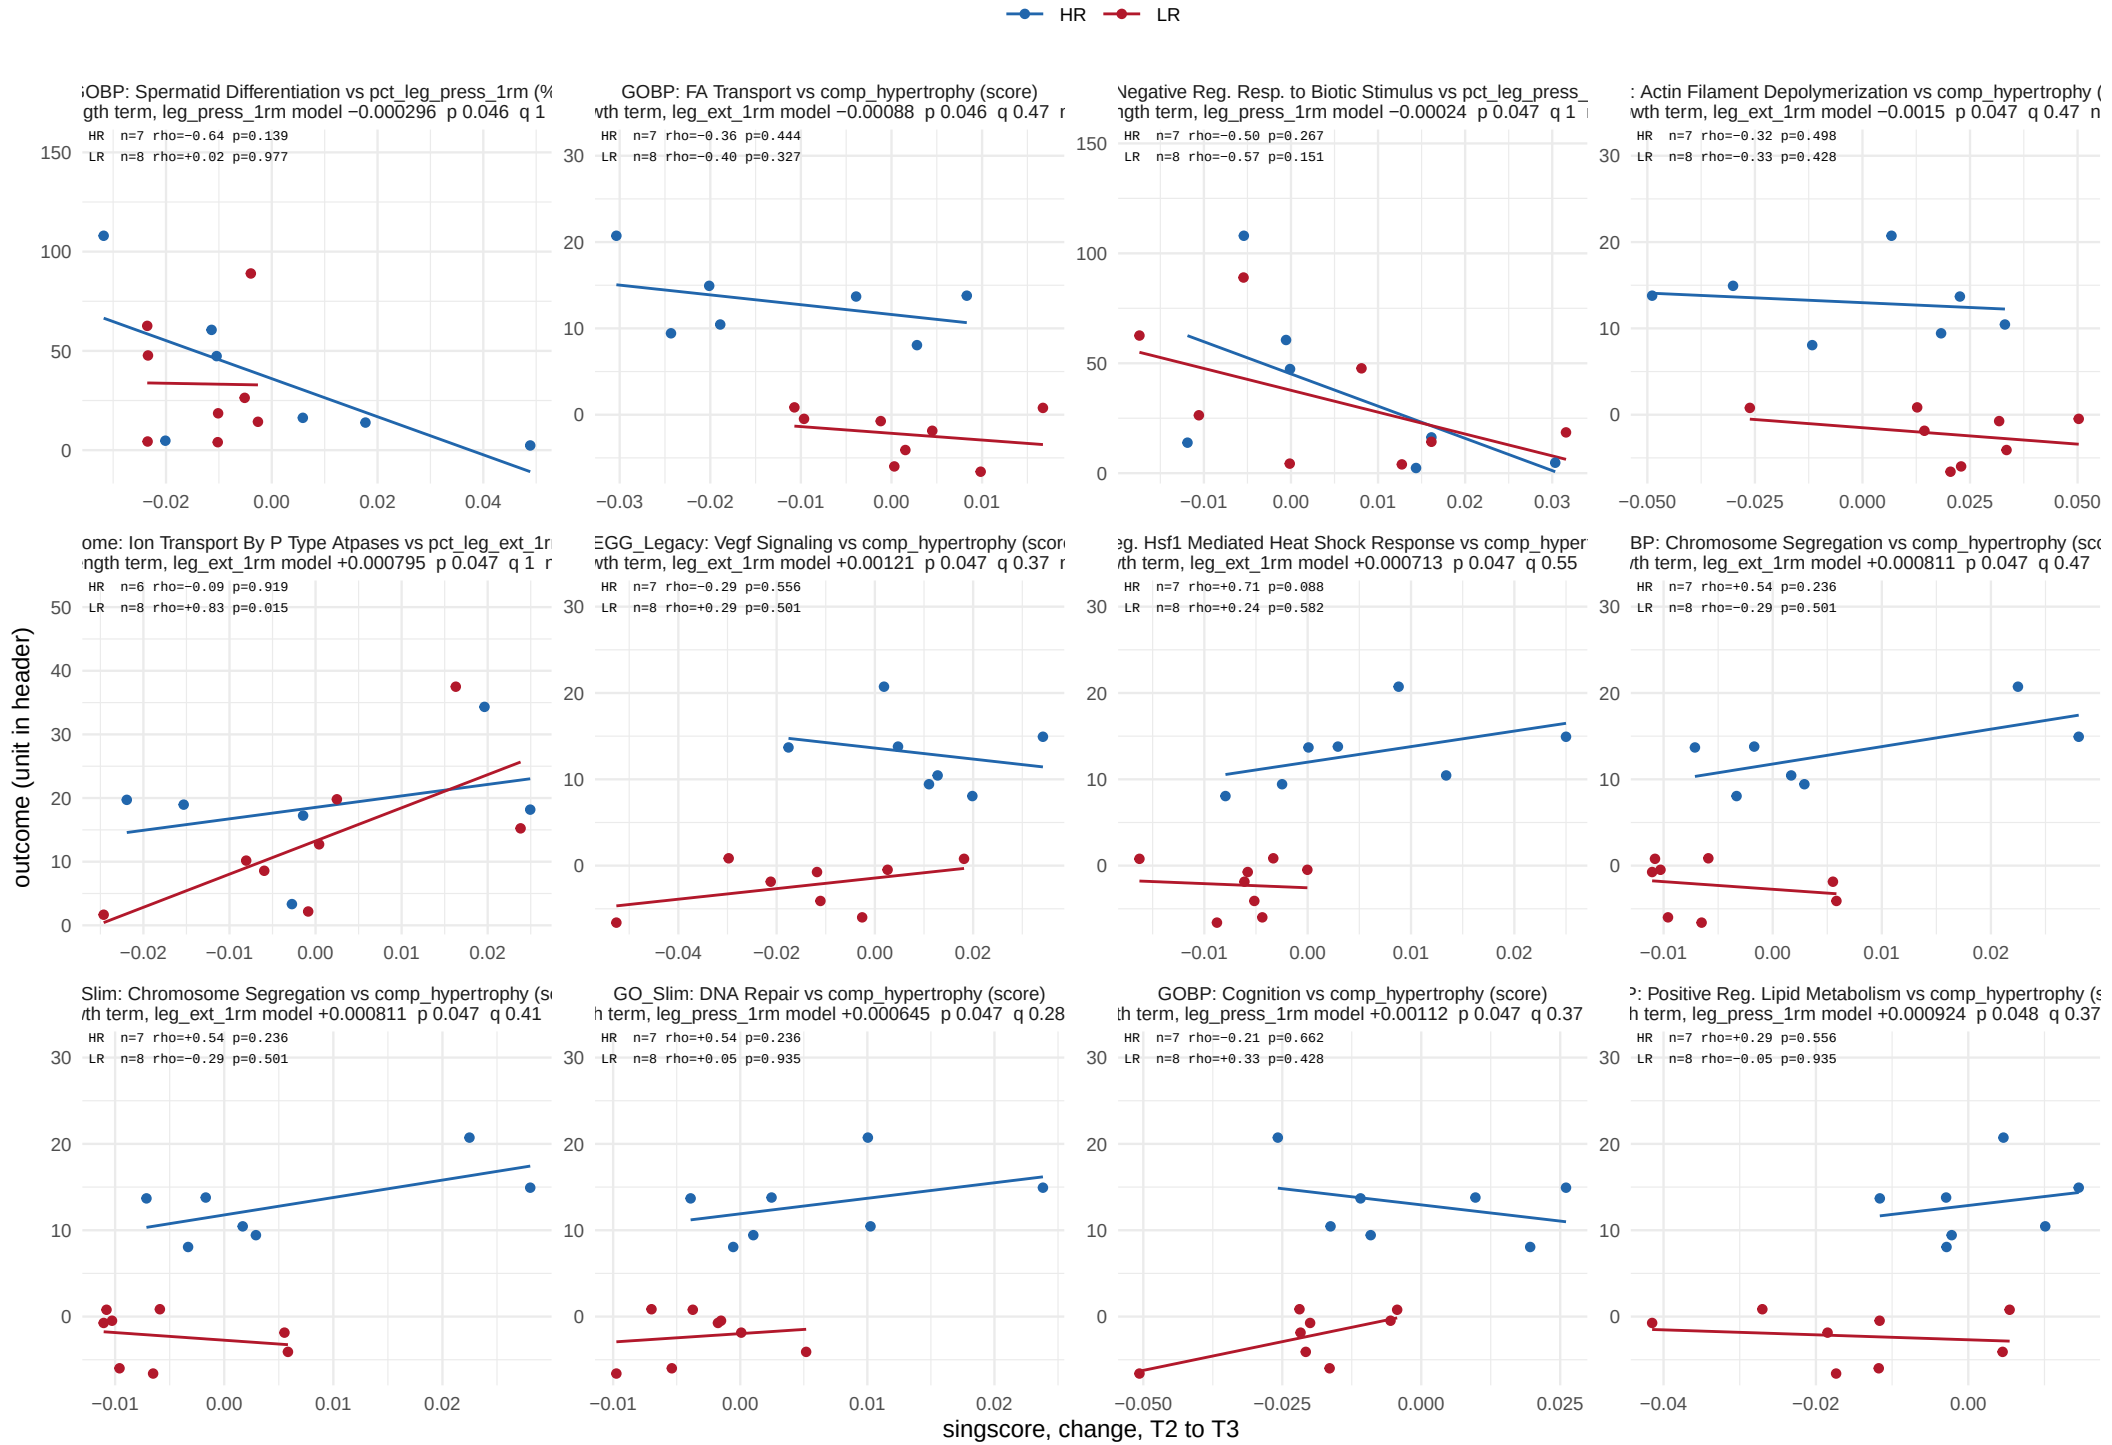


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

## Two predictor, acute window

334 of 5512 feature−outcome pairs at p < 0.05, 6 at BH < 0.05. Page 28 of 28.

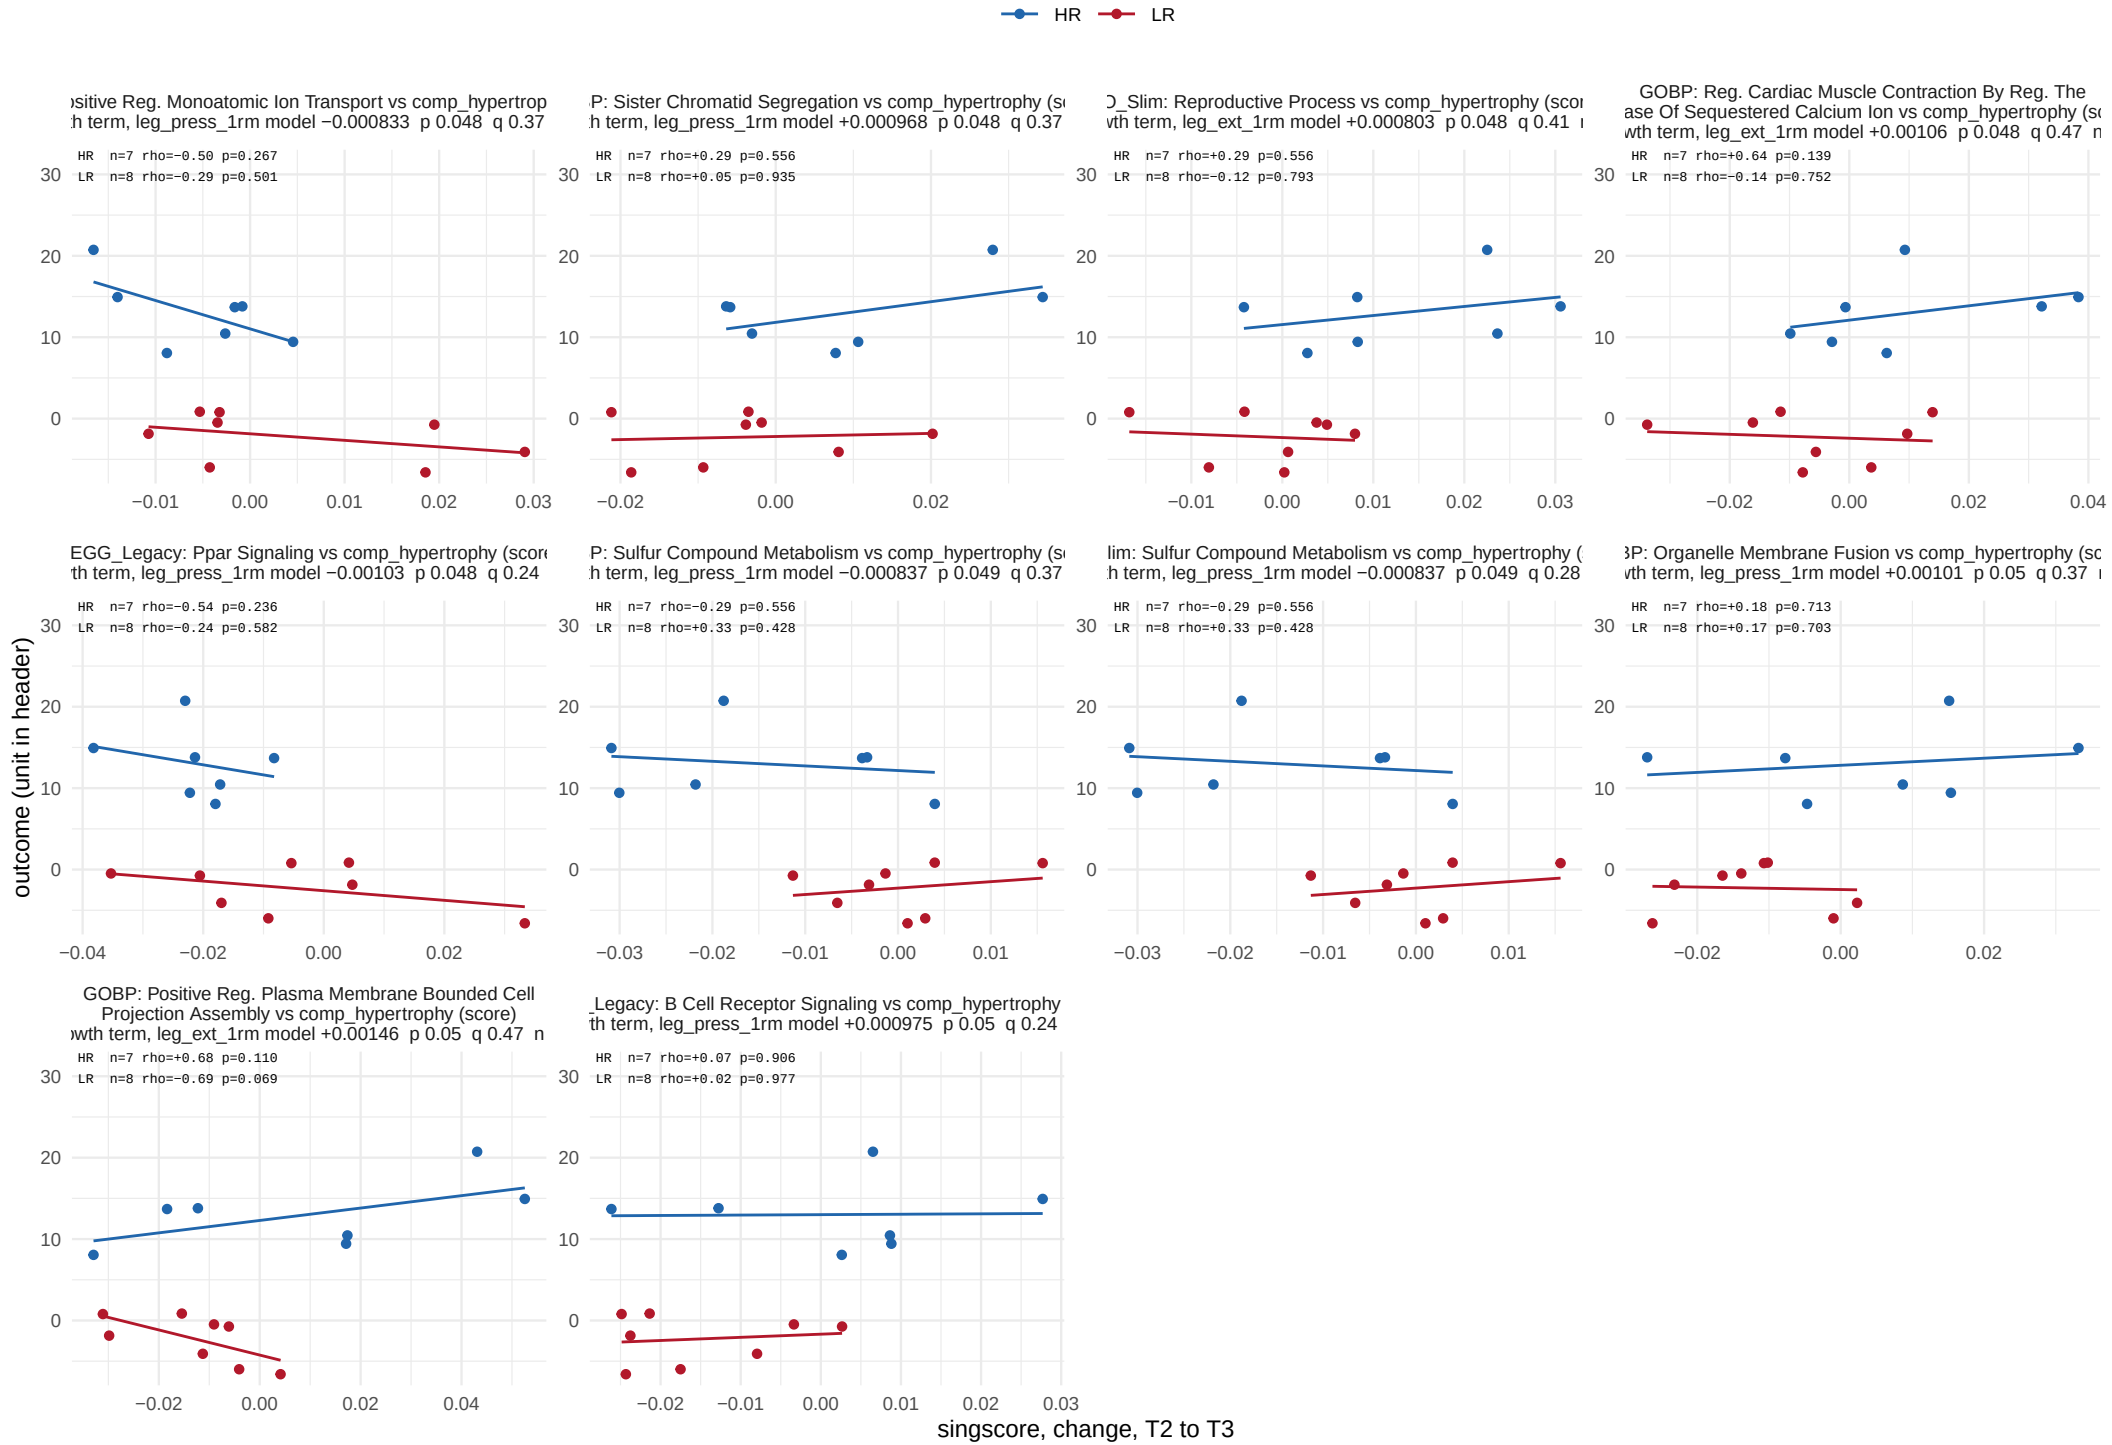


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term and collection, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.