

Classification overview: Hallmark

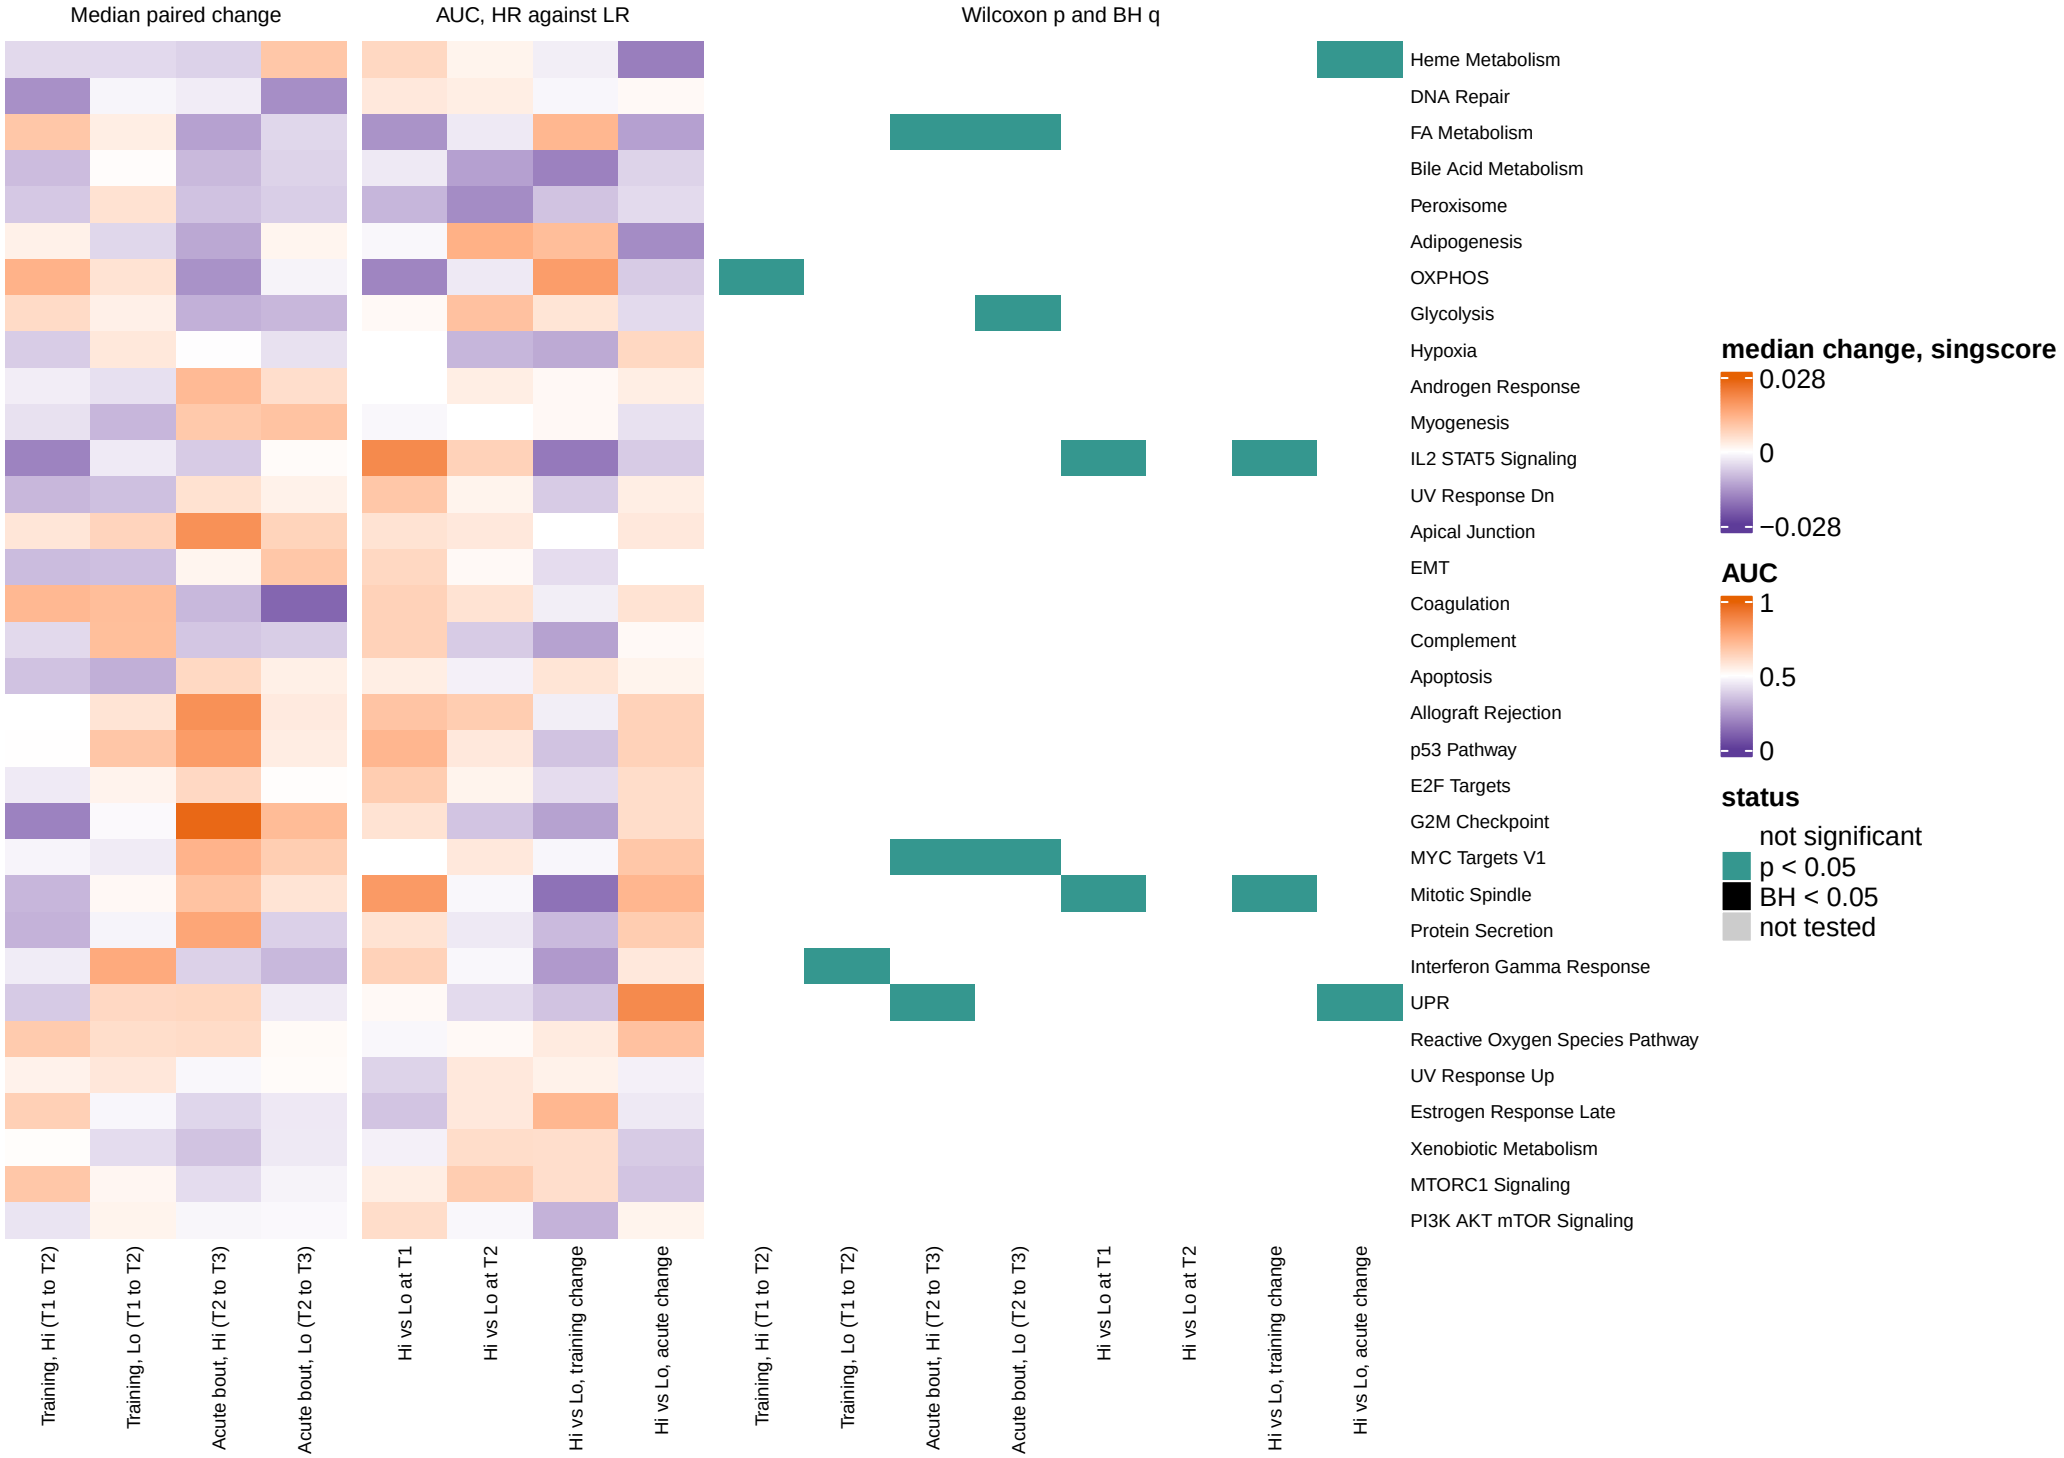


All 33 sets, one row each. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Median change colours stop at the 99th percentile of |change|, 0.028. Grey: not tested. Table: c_data/02_sets.xlsx, auc.

Classification overview: Reactome

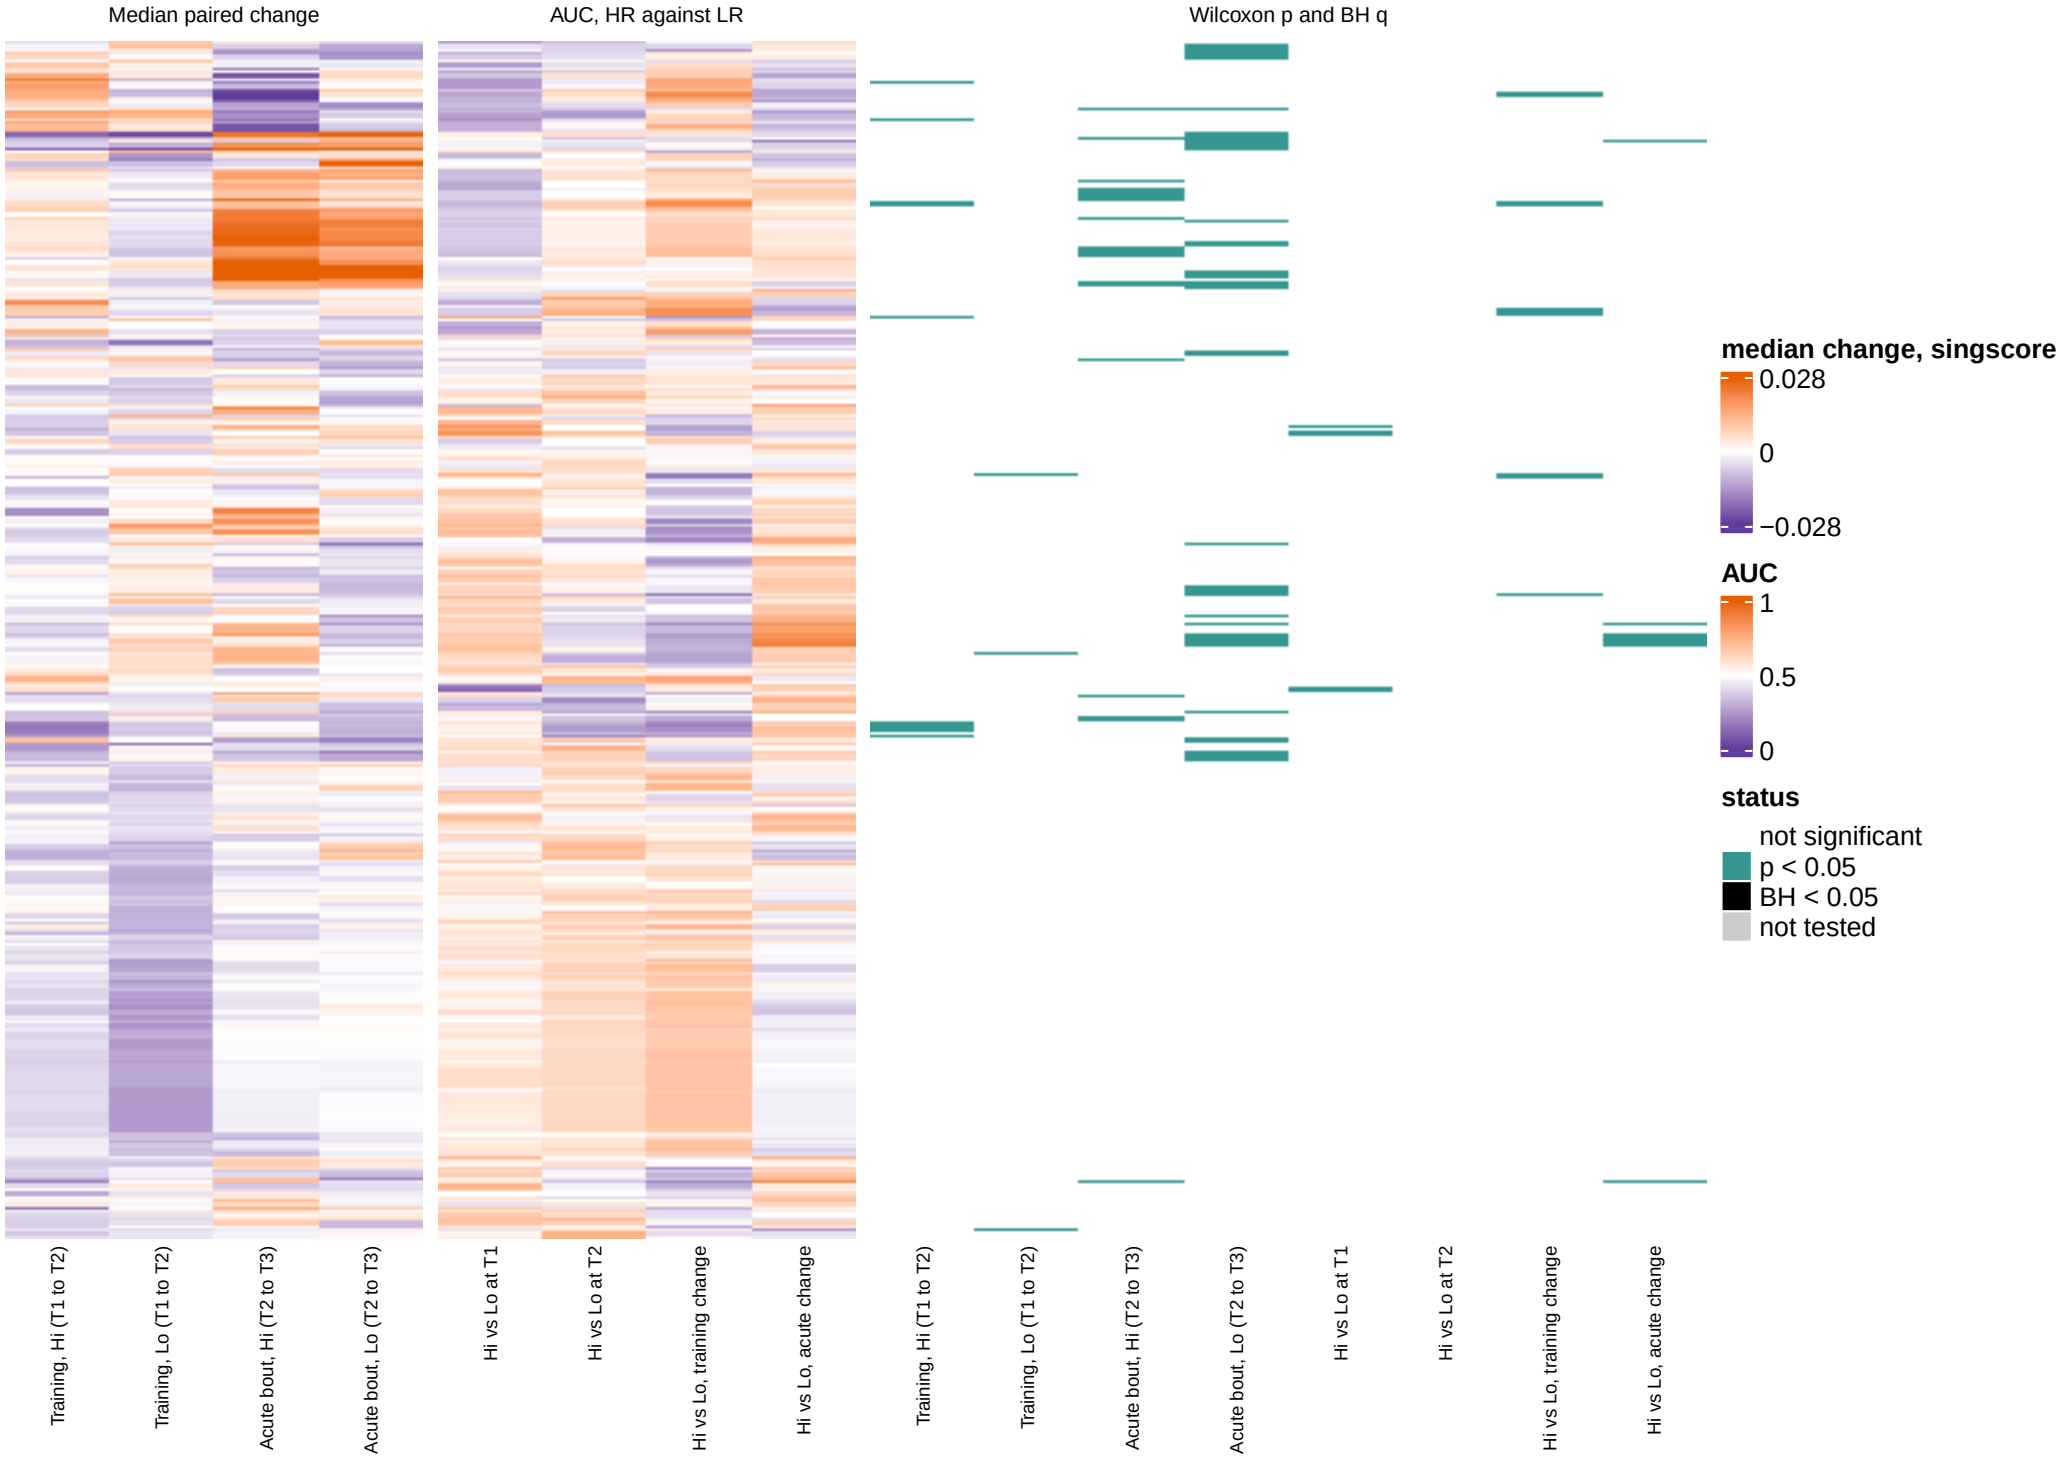


All 328 sets, one row each. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Median change colours stop at the 99th percentile of |change|, 0.028. Grey: not tested. Table: c_data/02_sets.xlsx, auc.

Classification overview: KEGG_Legacy

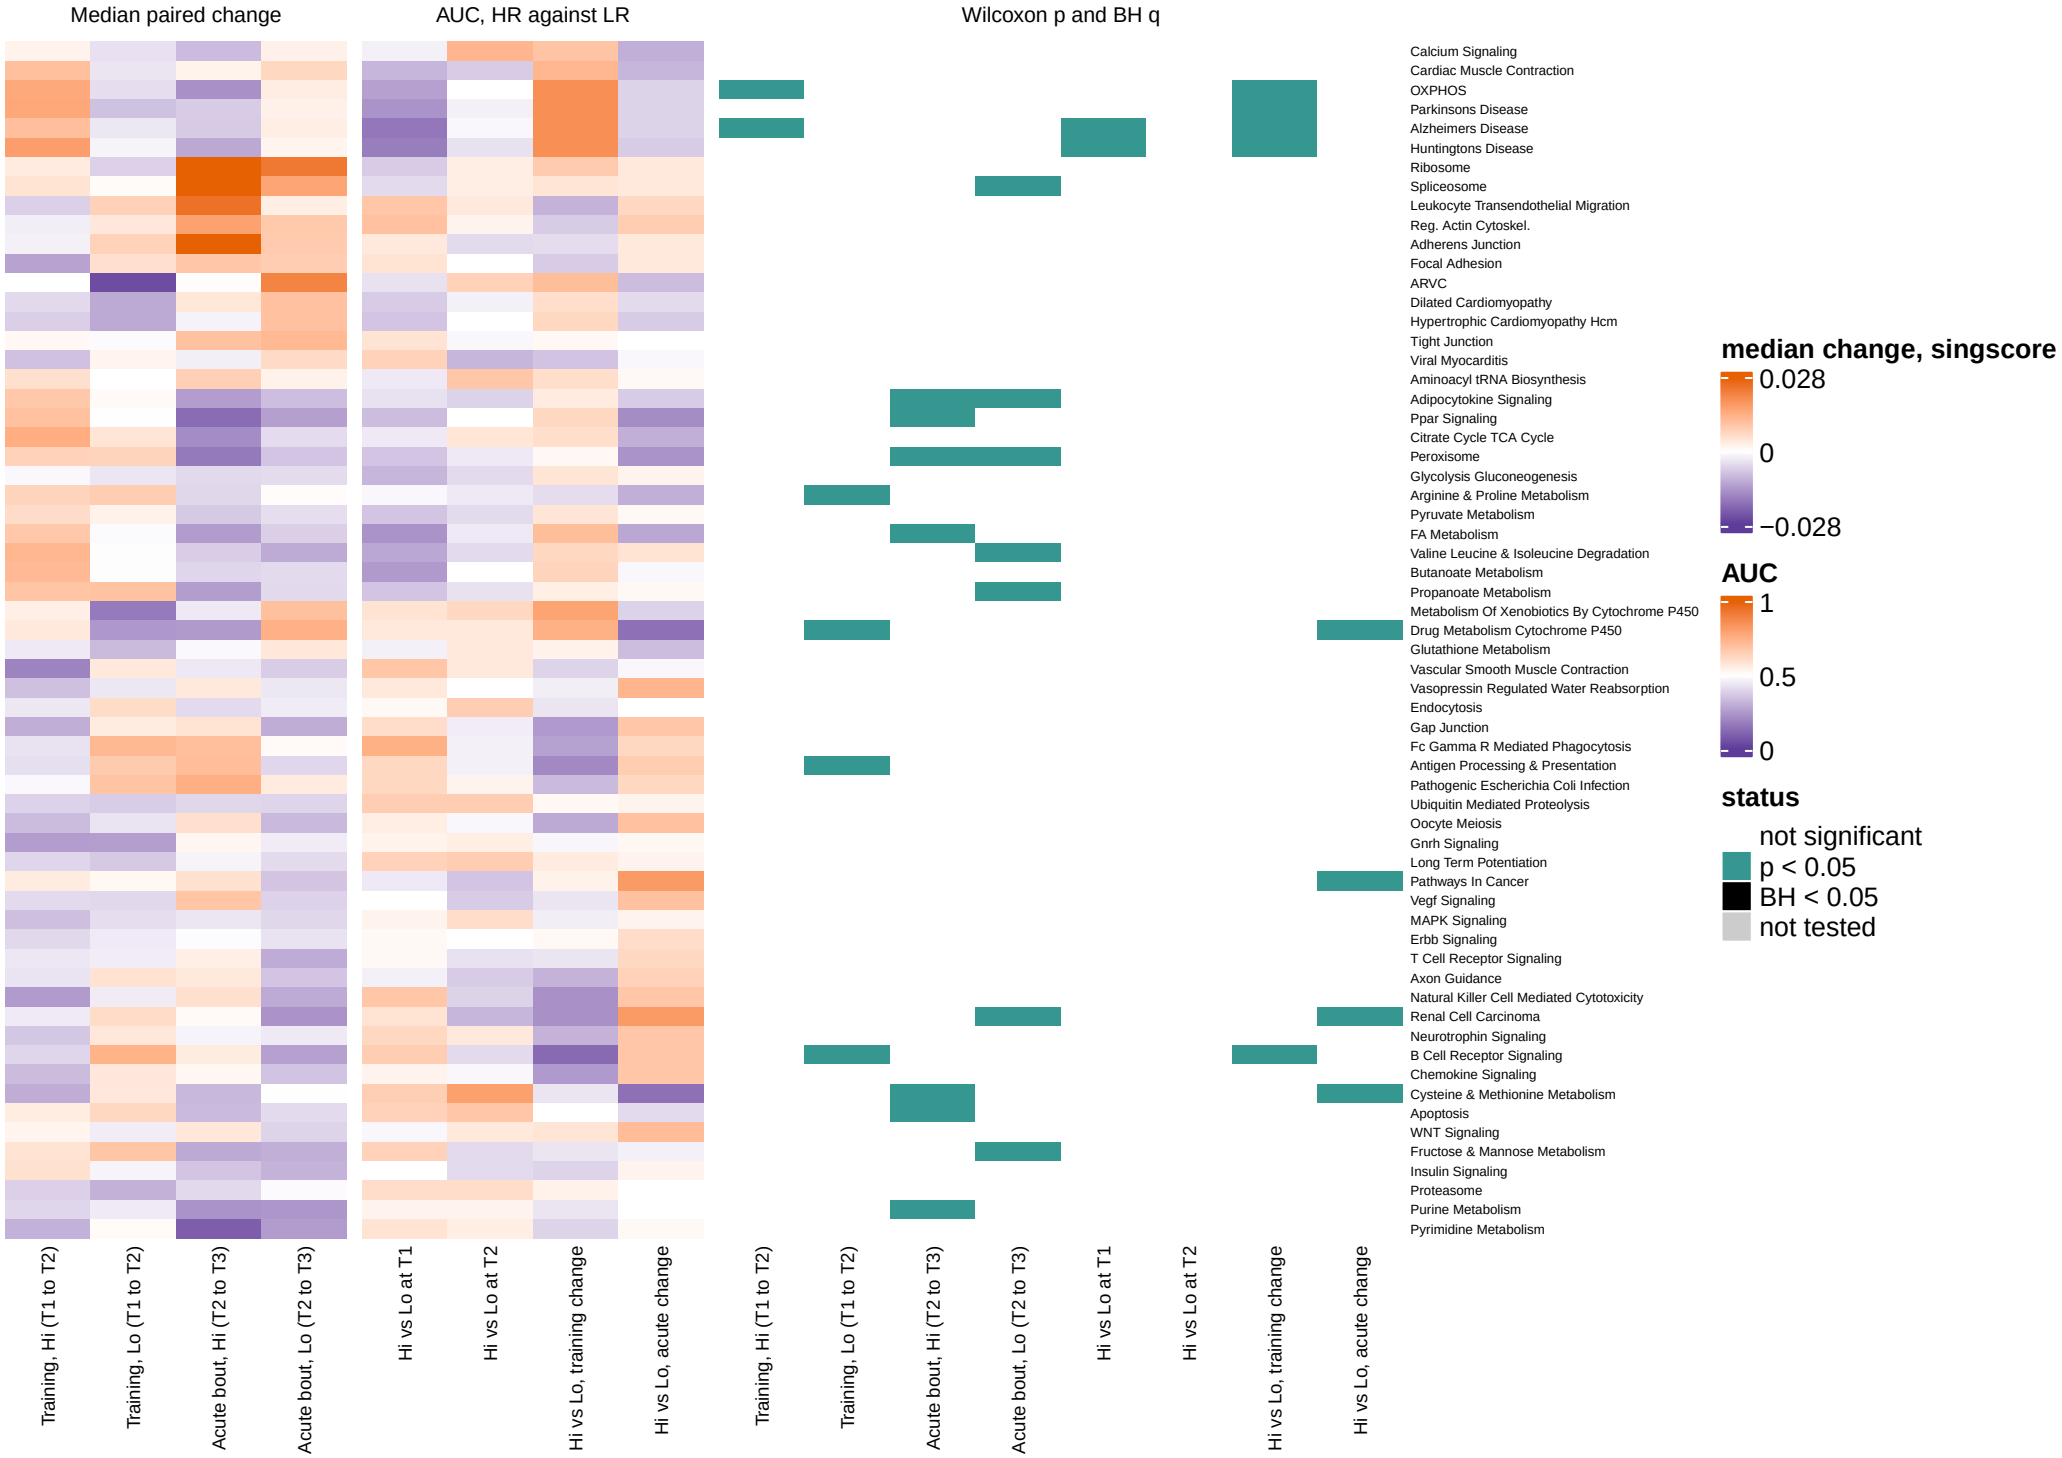


All 62 sets, one row each. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Median change colours stop at the 99th percentile of |change|, 0.028. Grey: not tested. Table: c_data/02_sets.xlsx, auc.

Classification overview: GOBP

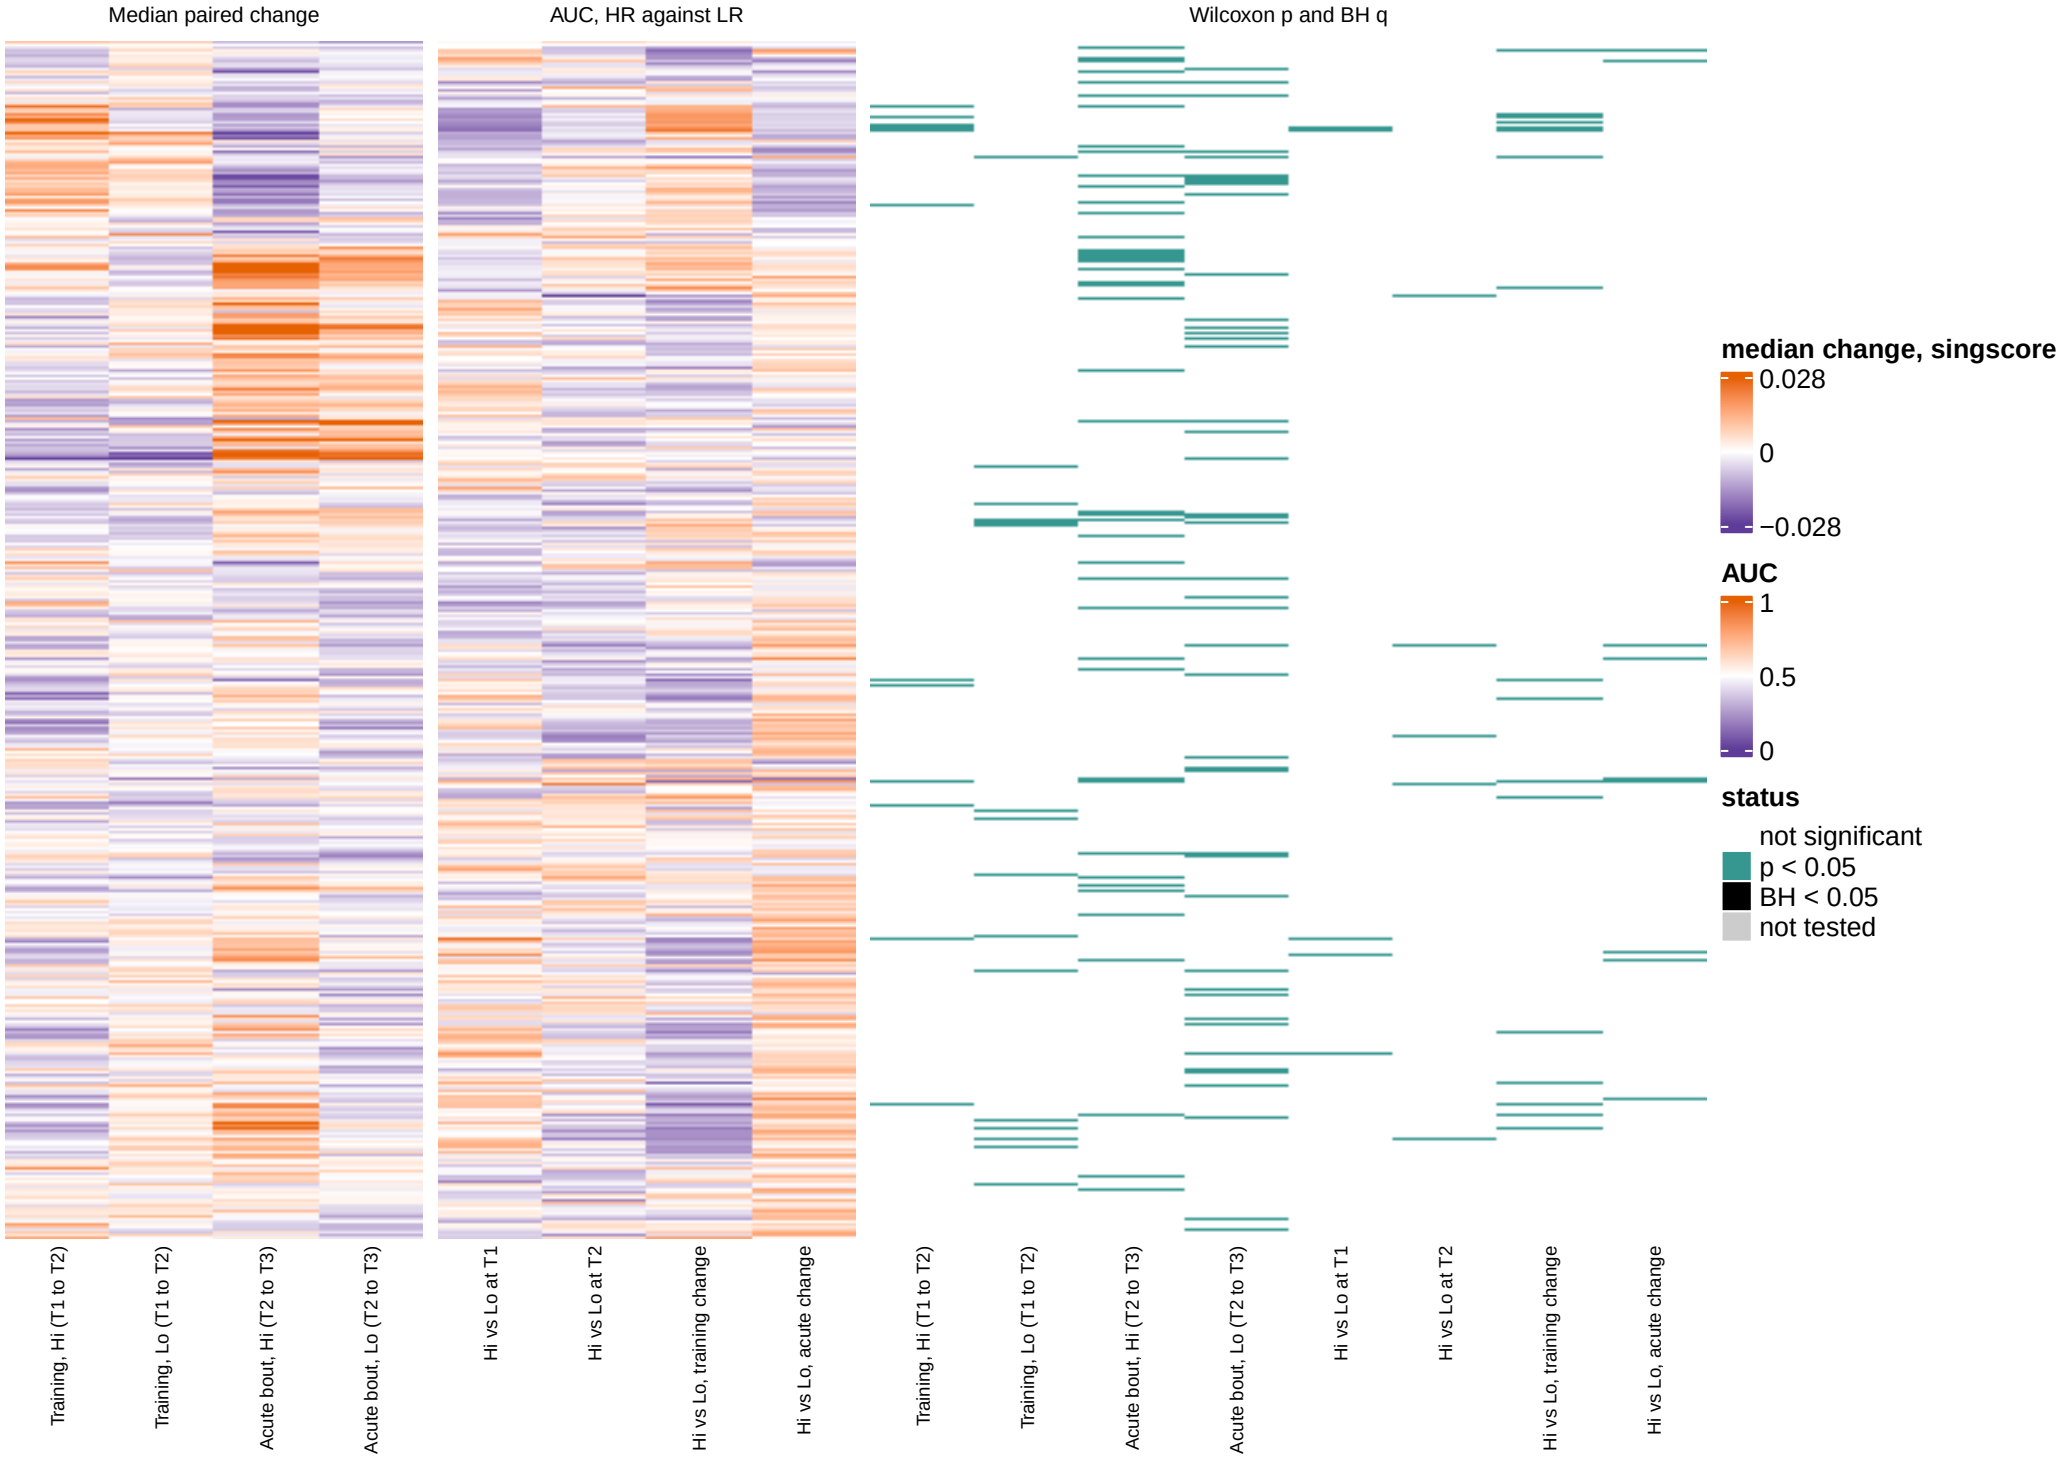

All 897 sets, one row each. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Median change colours stop at the 99th percentile of |change|, 0.028. Grey: not tested. Table: c_data/02_sets.xlsx, auc.


Classification overview: GO_Slim

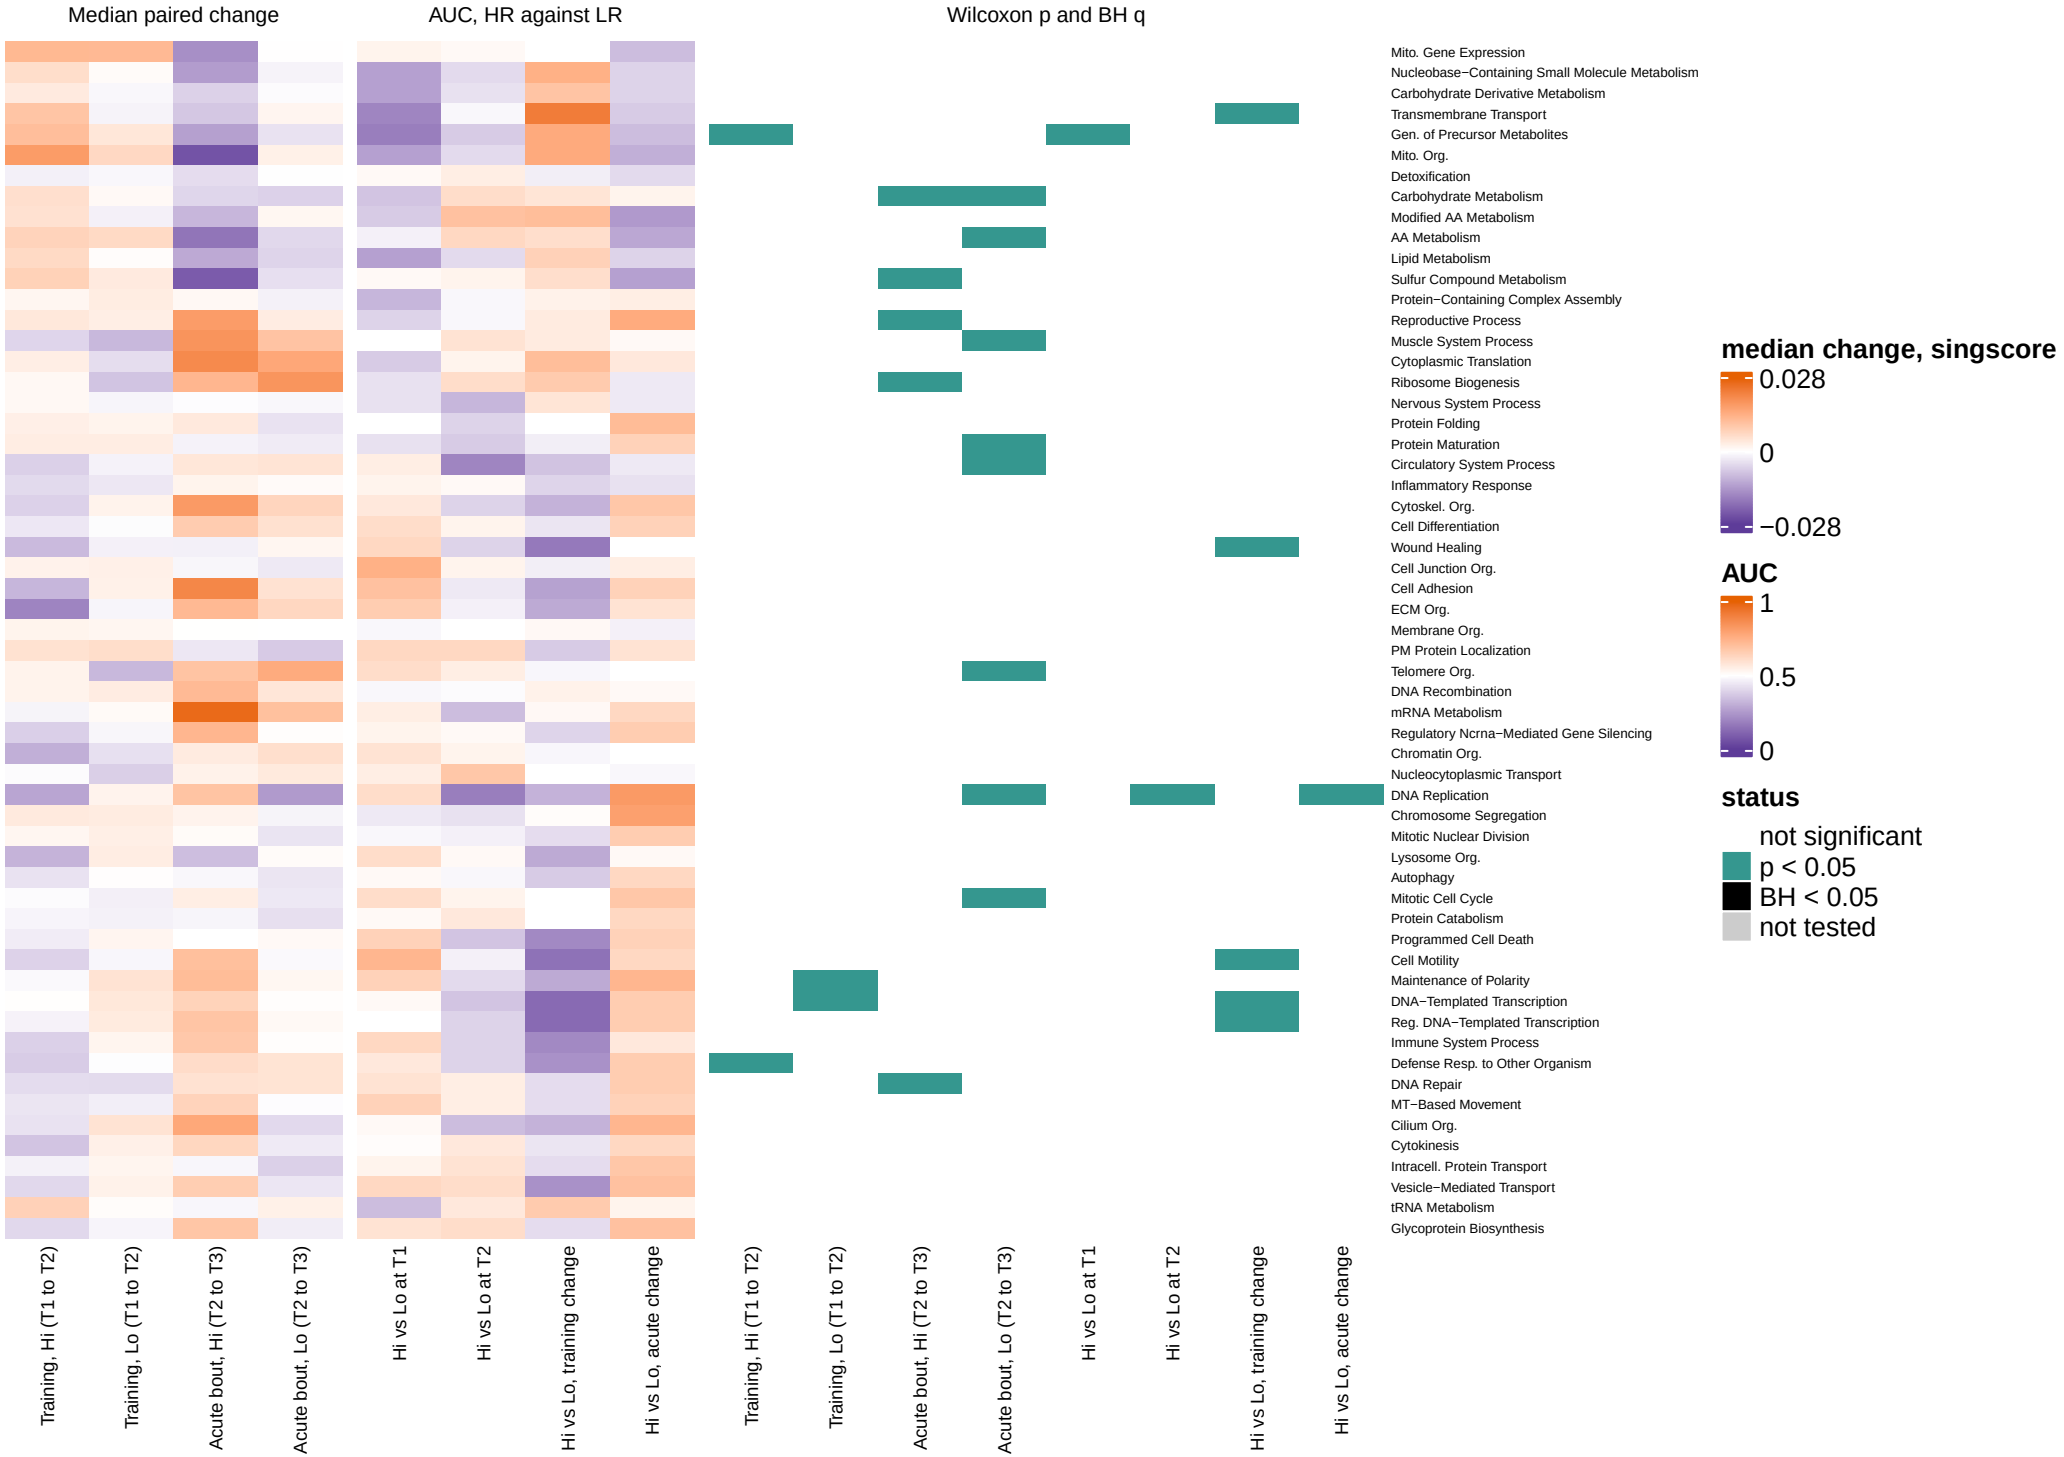

All 58 sets, one row each. Rows are ordered within collection by average−linkage clustering (1 − Pearson r) of singscore, for display only. Median change colours stop at the 99th percentile of |change|, 0.028. Grey: not tested. Table: c_data/02_sets.xlsx, auc.

Training, Hi (T1 to T2)


34 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 1 of 2.

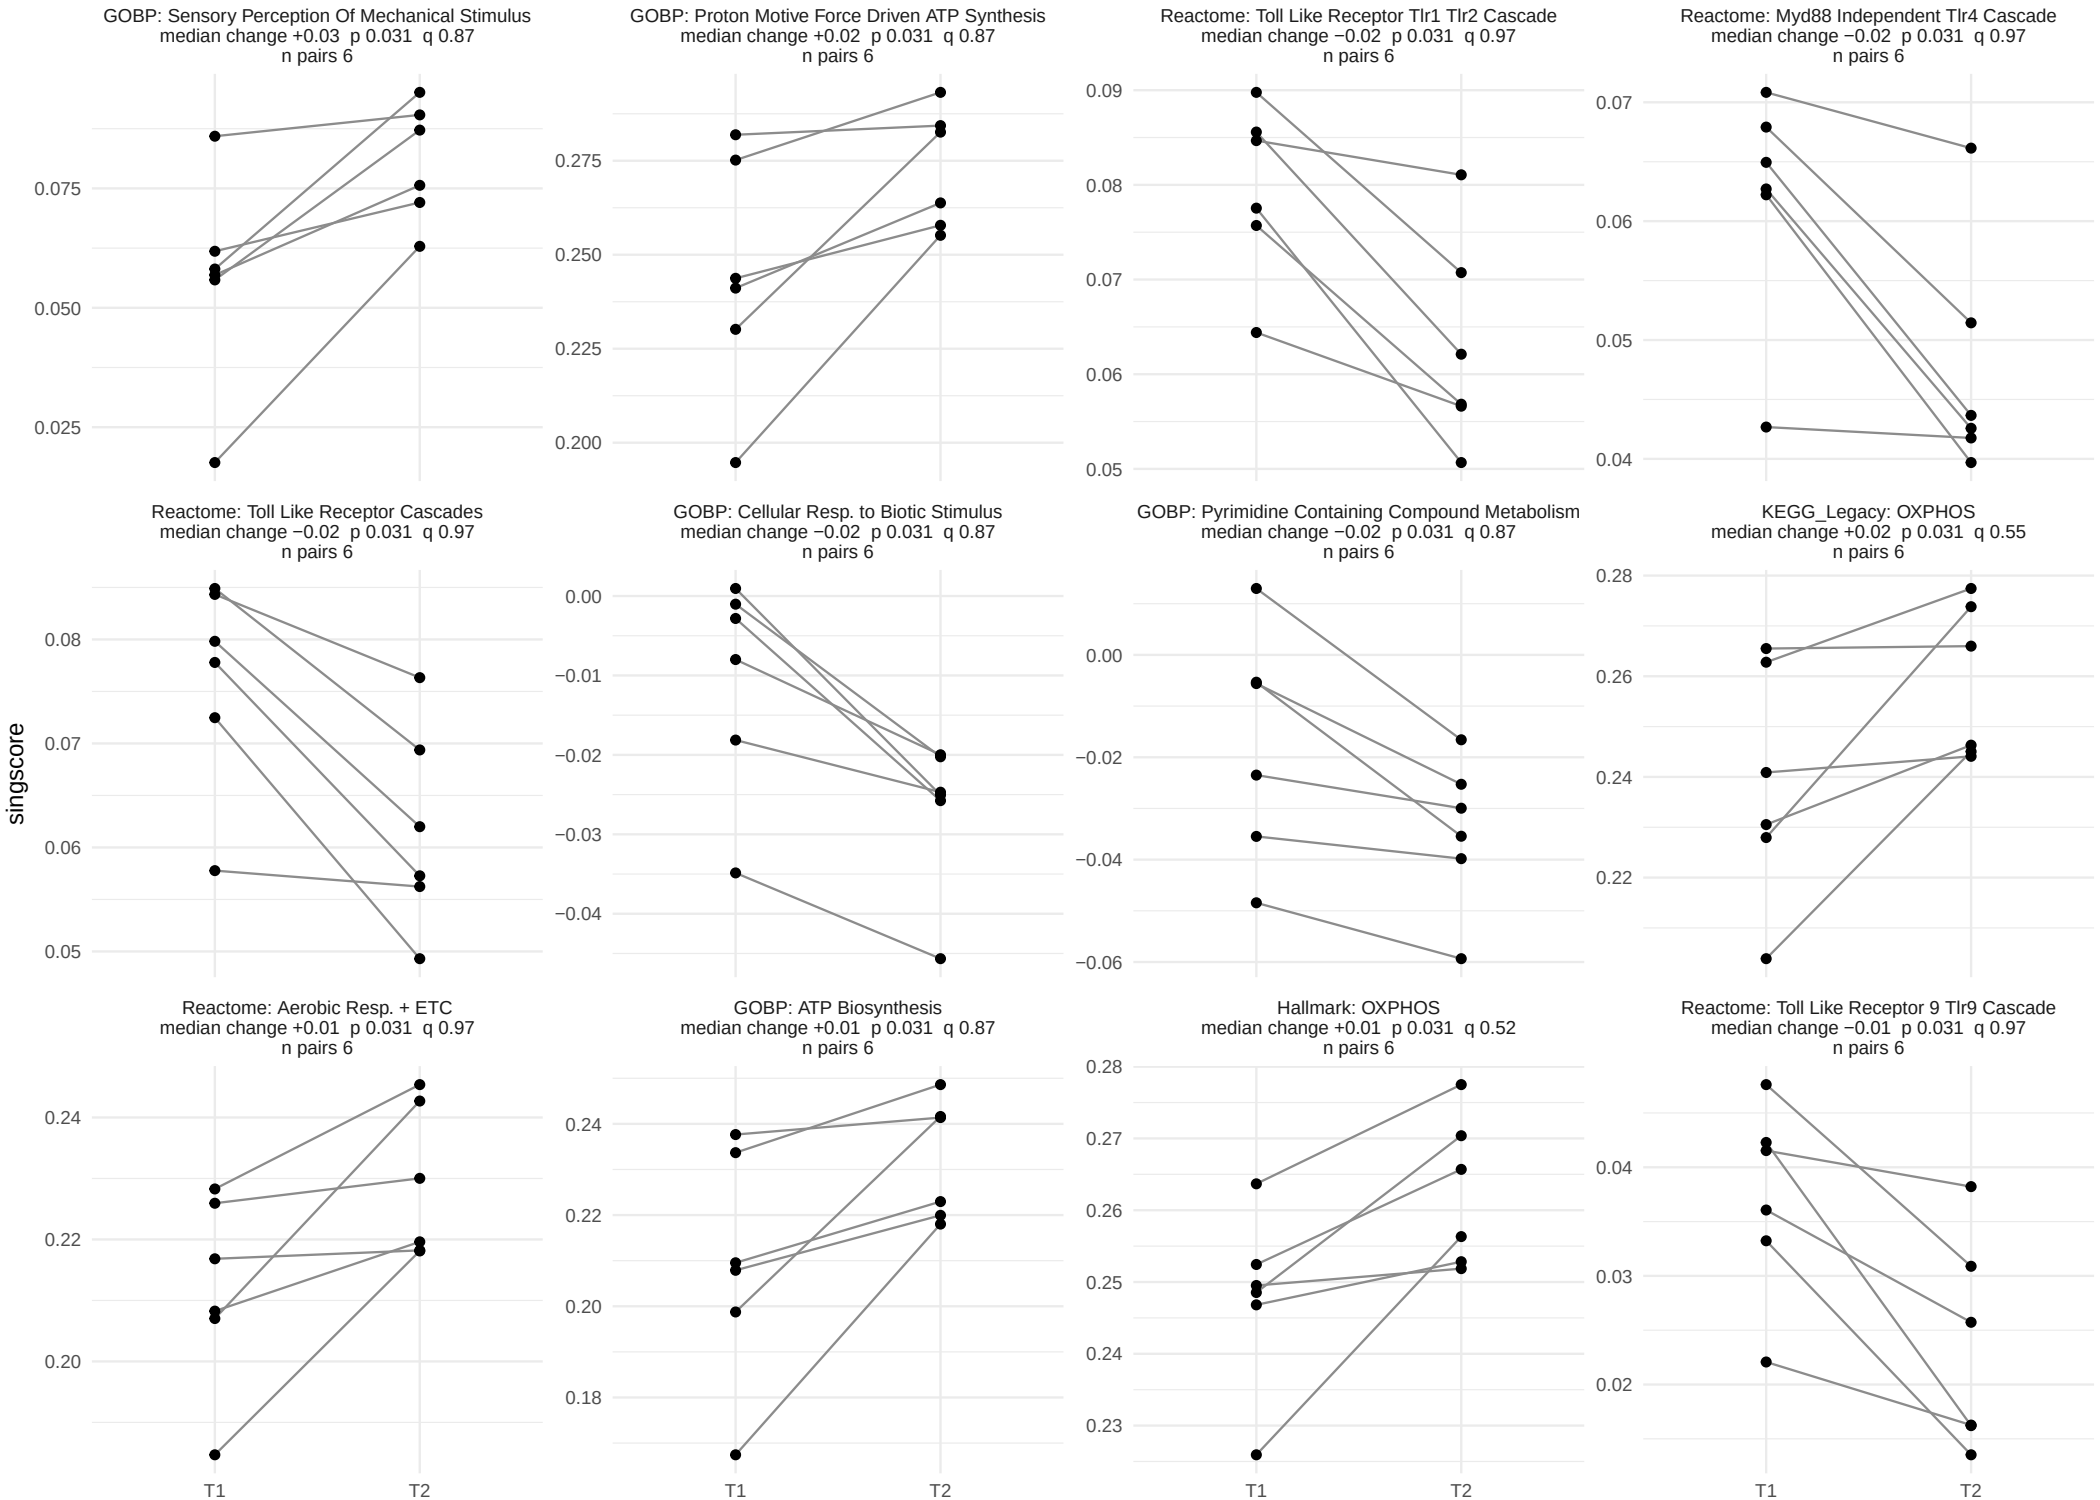

Wilcoxon signed−rank test on up to 6 pairs; smallest attainable p 0.031. Header: median paired change, p, BH q within task and collection, and the feature's complete pairs. Table: c_data/02_sets.xlsx, auc.

Training, Hi (T1 to T2)


34 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 2 of 2.

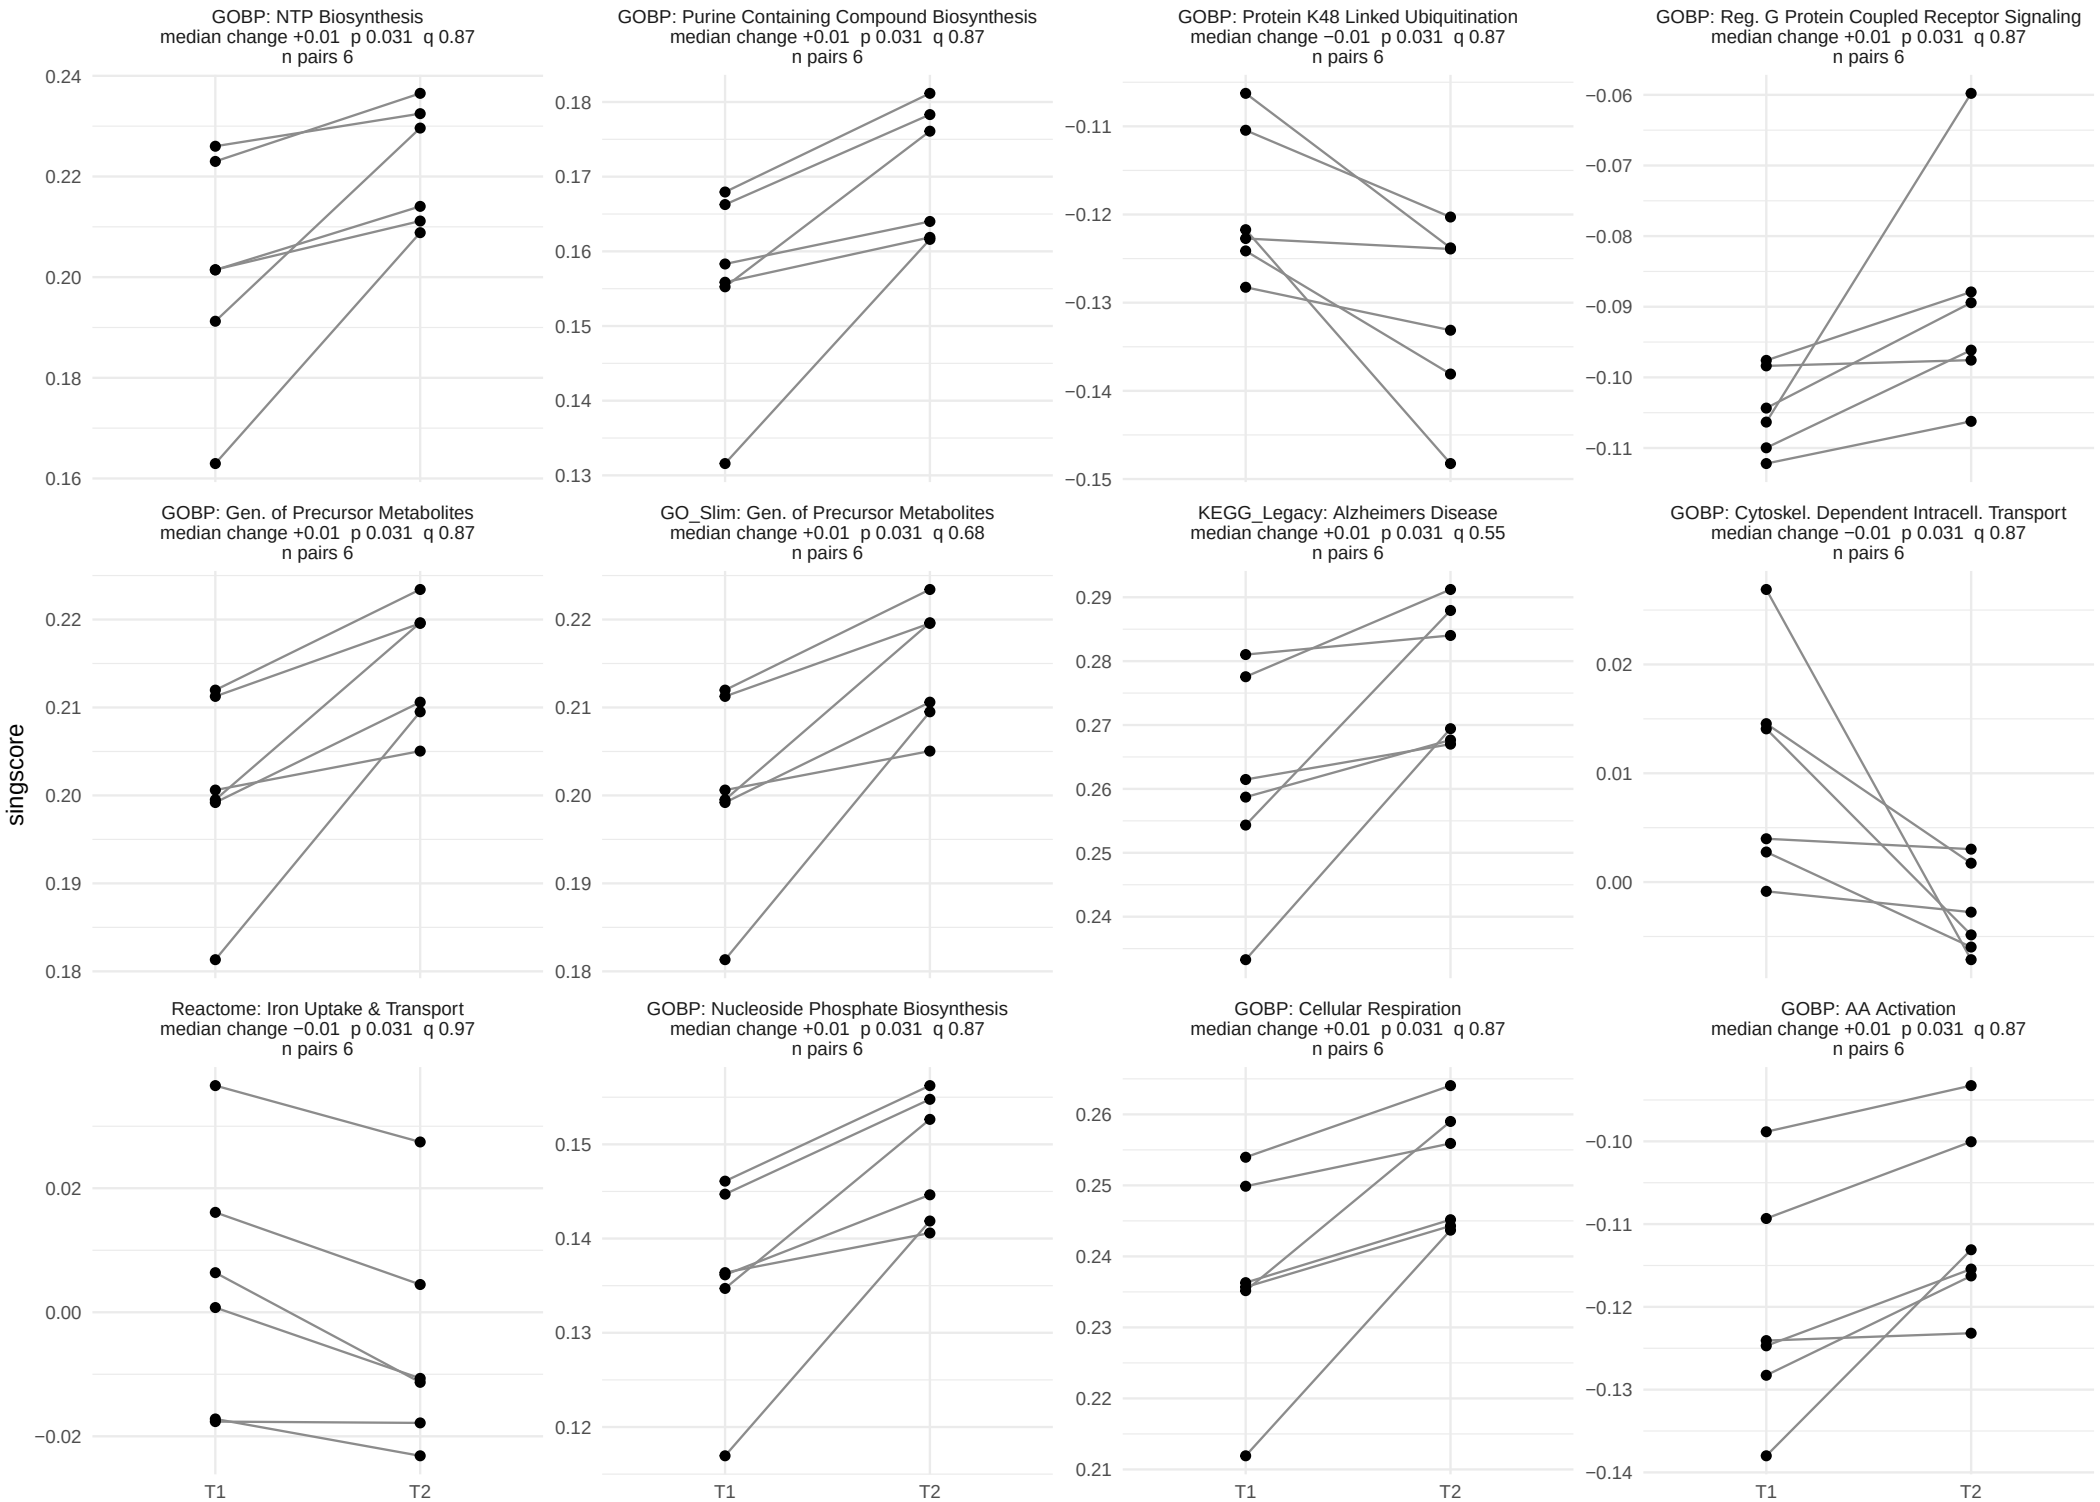

Wilcoxon signed−rank test on up to 6 pairs; smallest attainable p 0.031. Header: median paired change, p, BH q within task and collection, and the feature's complete pairs. Table: c_data/02_sets.xlsx, auc.

Training, Lo (T1 to T2)


39 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 1 of 2.

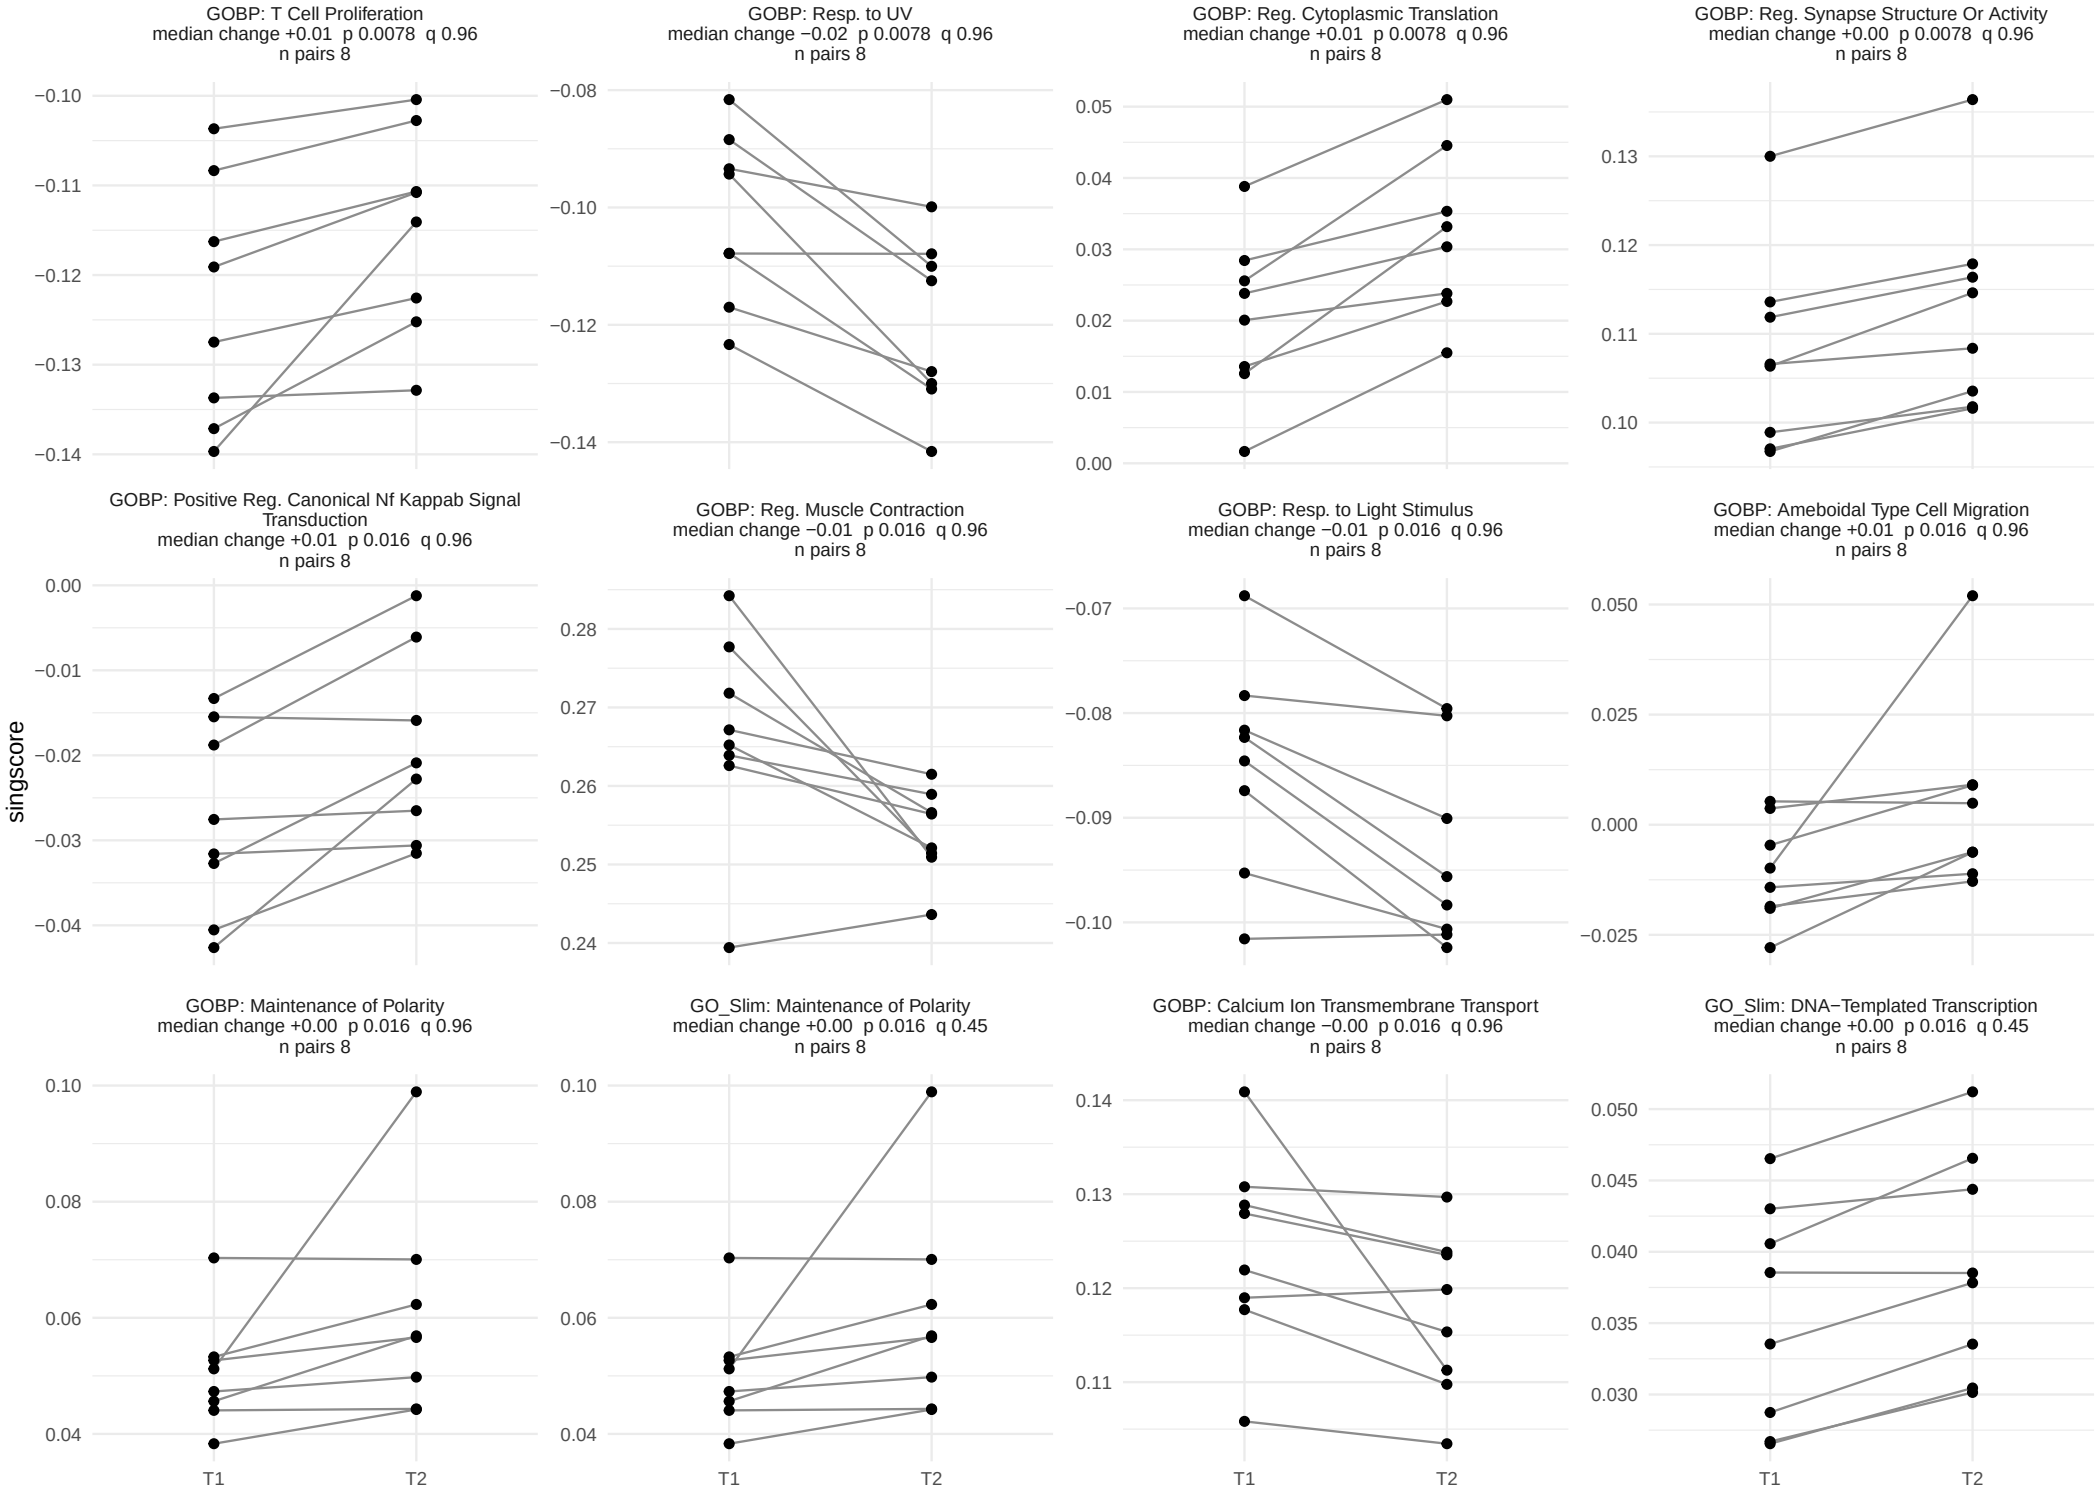

Wilcoxon signed−rank test on up to 8 pairs; smallest attainable p 0.0078. Header: median paired change, p, BH q within task and collection, and the feature's complete pairs. Table: c_data/02_sets.xlsx, auc.

Training, Lo (T1 to T2)


39 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 2 of 2.

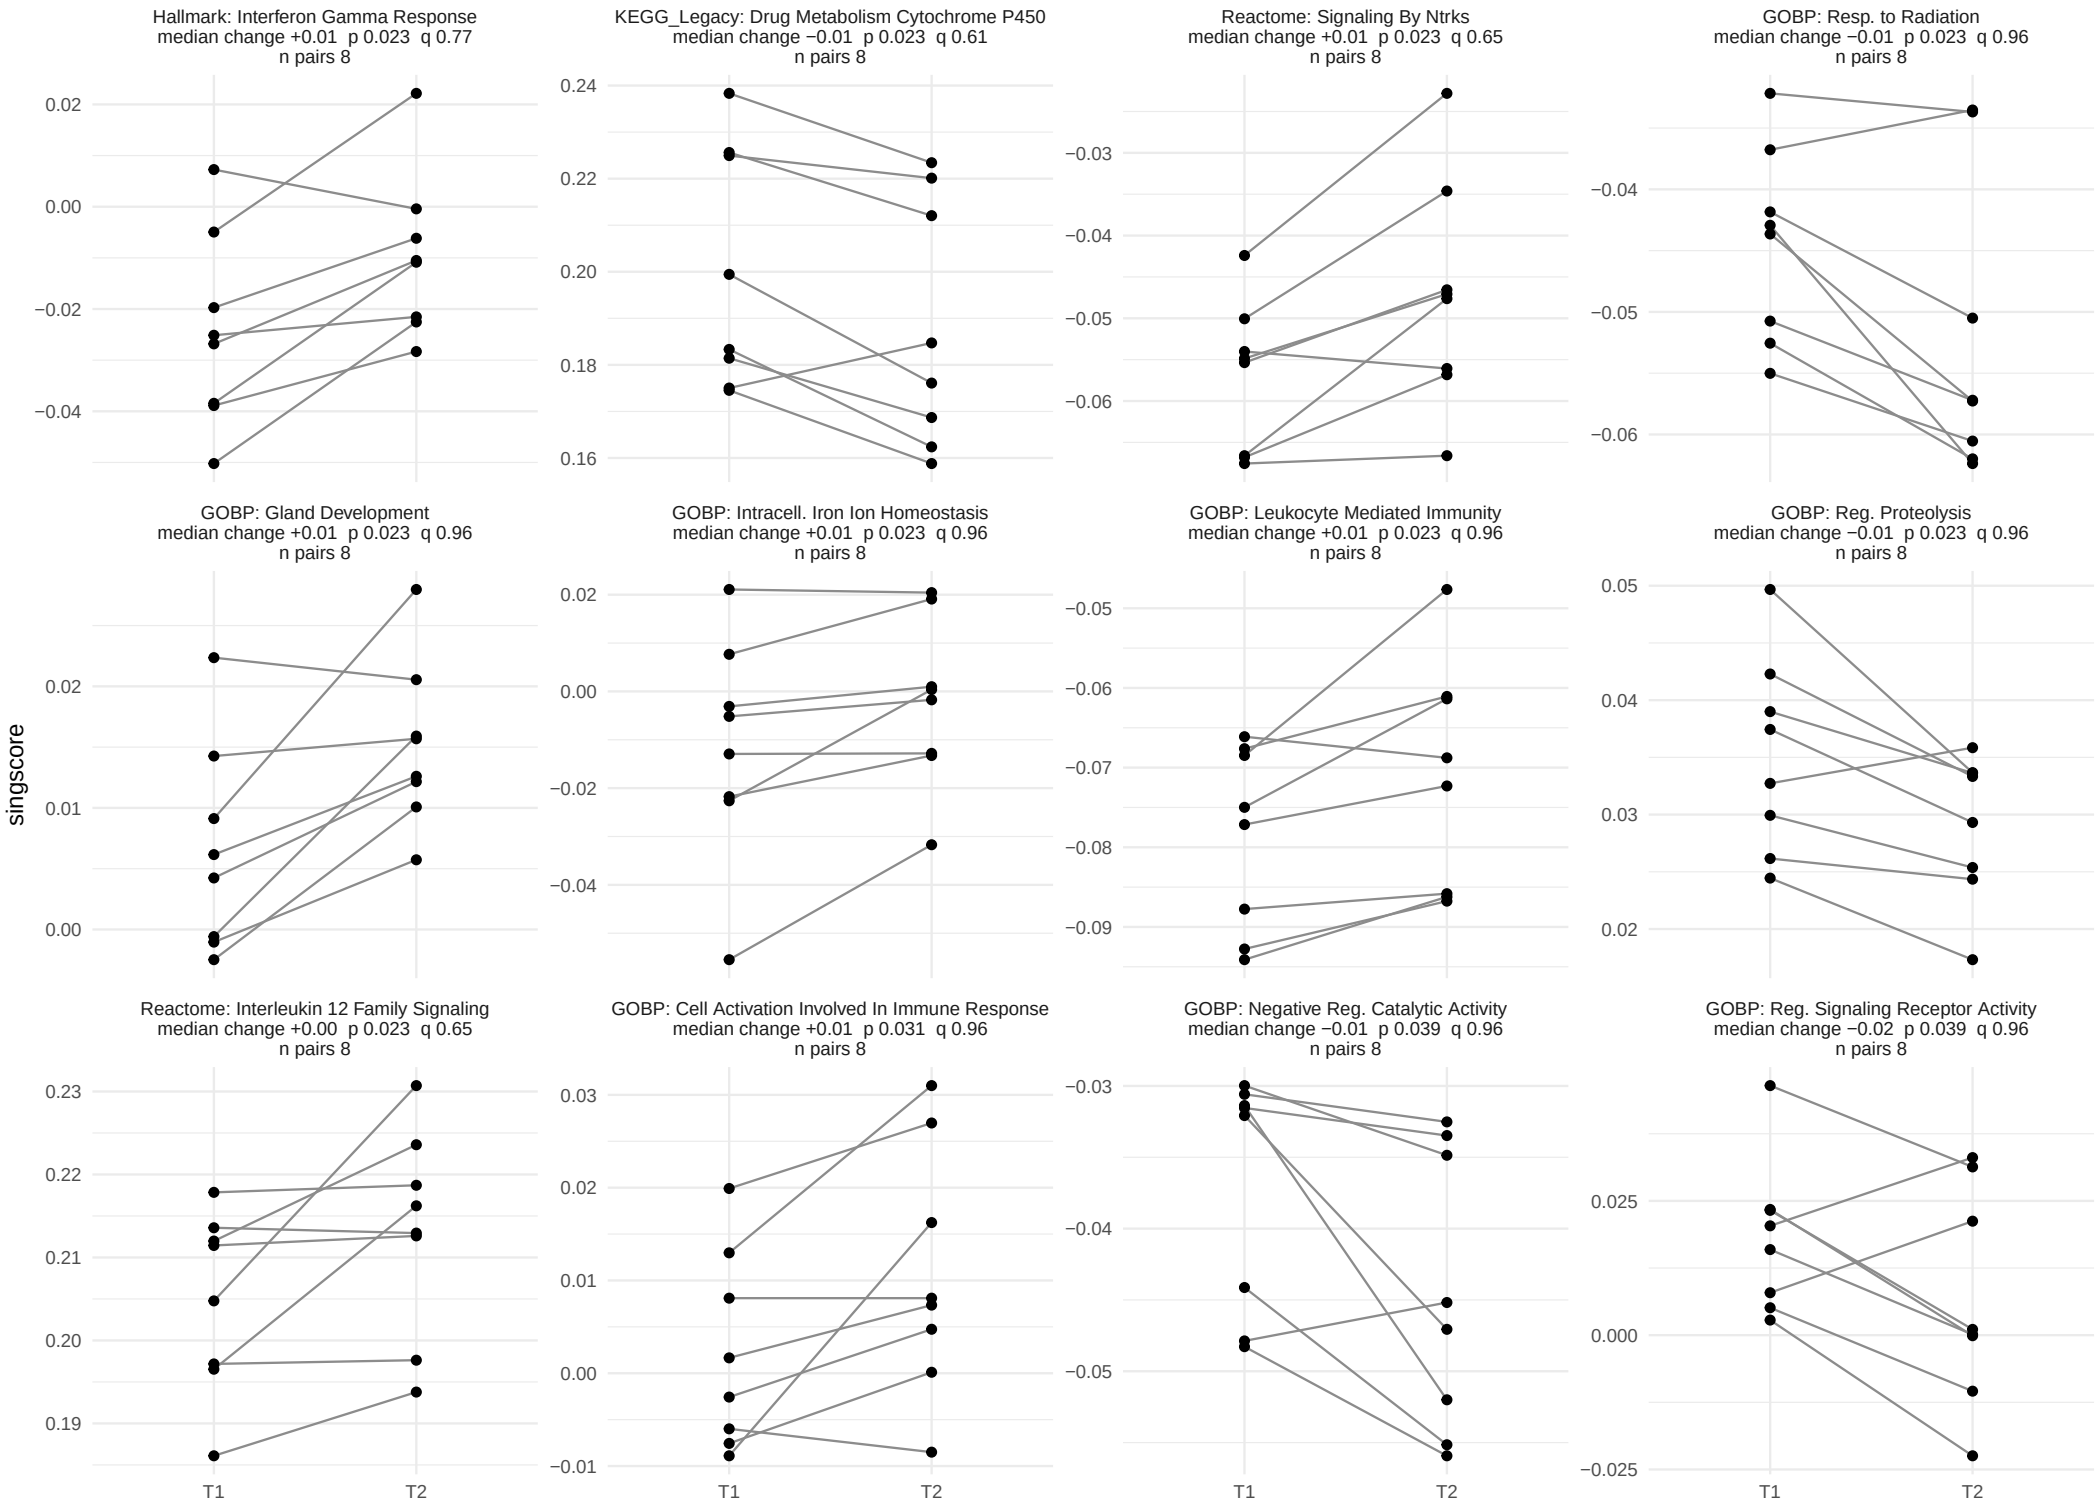

Wilcoxon signed−rank test on up to 8 pairs; smallest attainable p 0.0078. Header: median paired change, p, BH q within task and collection, and the feature's complete pairs. Table: c_data/02_sets.xlsx, auc.

Acute bout, Hi (T2 to T3)


114 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 1 of 2.

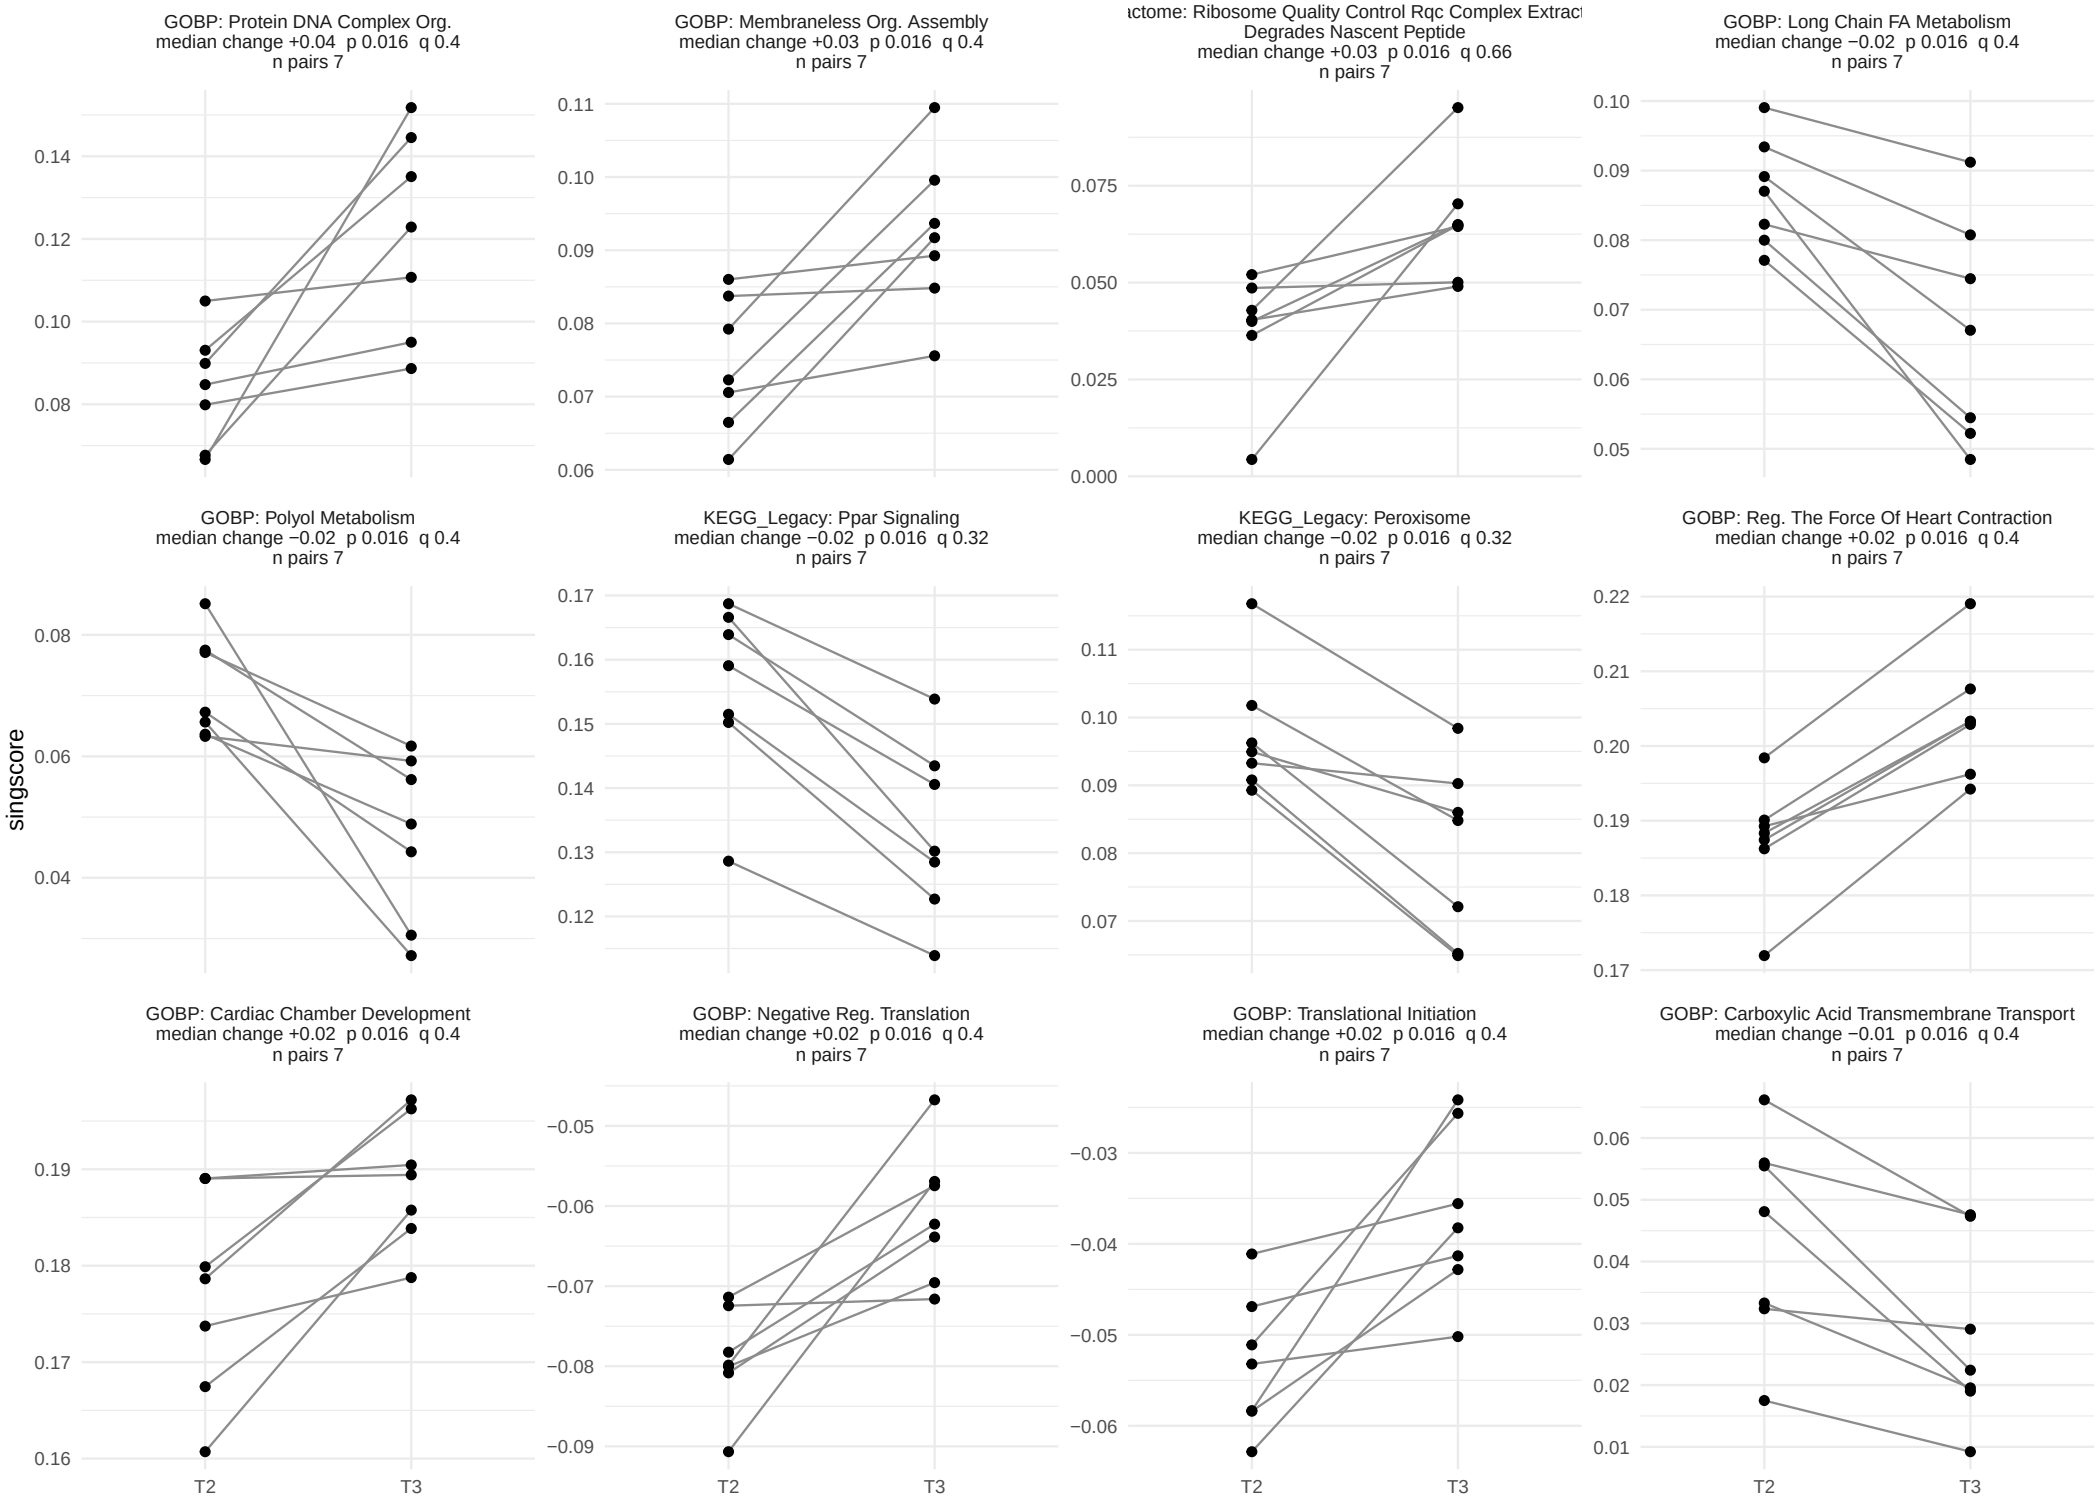

Wilcoxon signed−rank test on up to 7 pairs; smallest attainable p 0.016. Header: median paired change, p, BH q within task and collection, and the feature's complete pairs. Table: c_data/02_sets.xlsx, auc.

Acute bout, Hi (T2 to T3)


114 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 2 of 2.

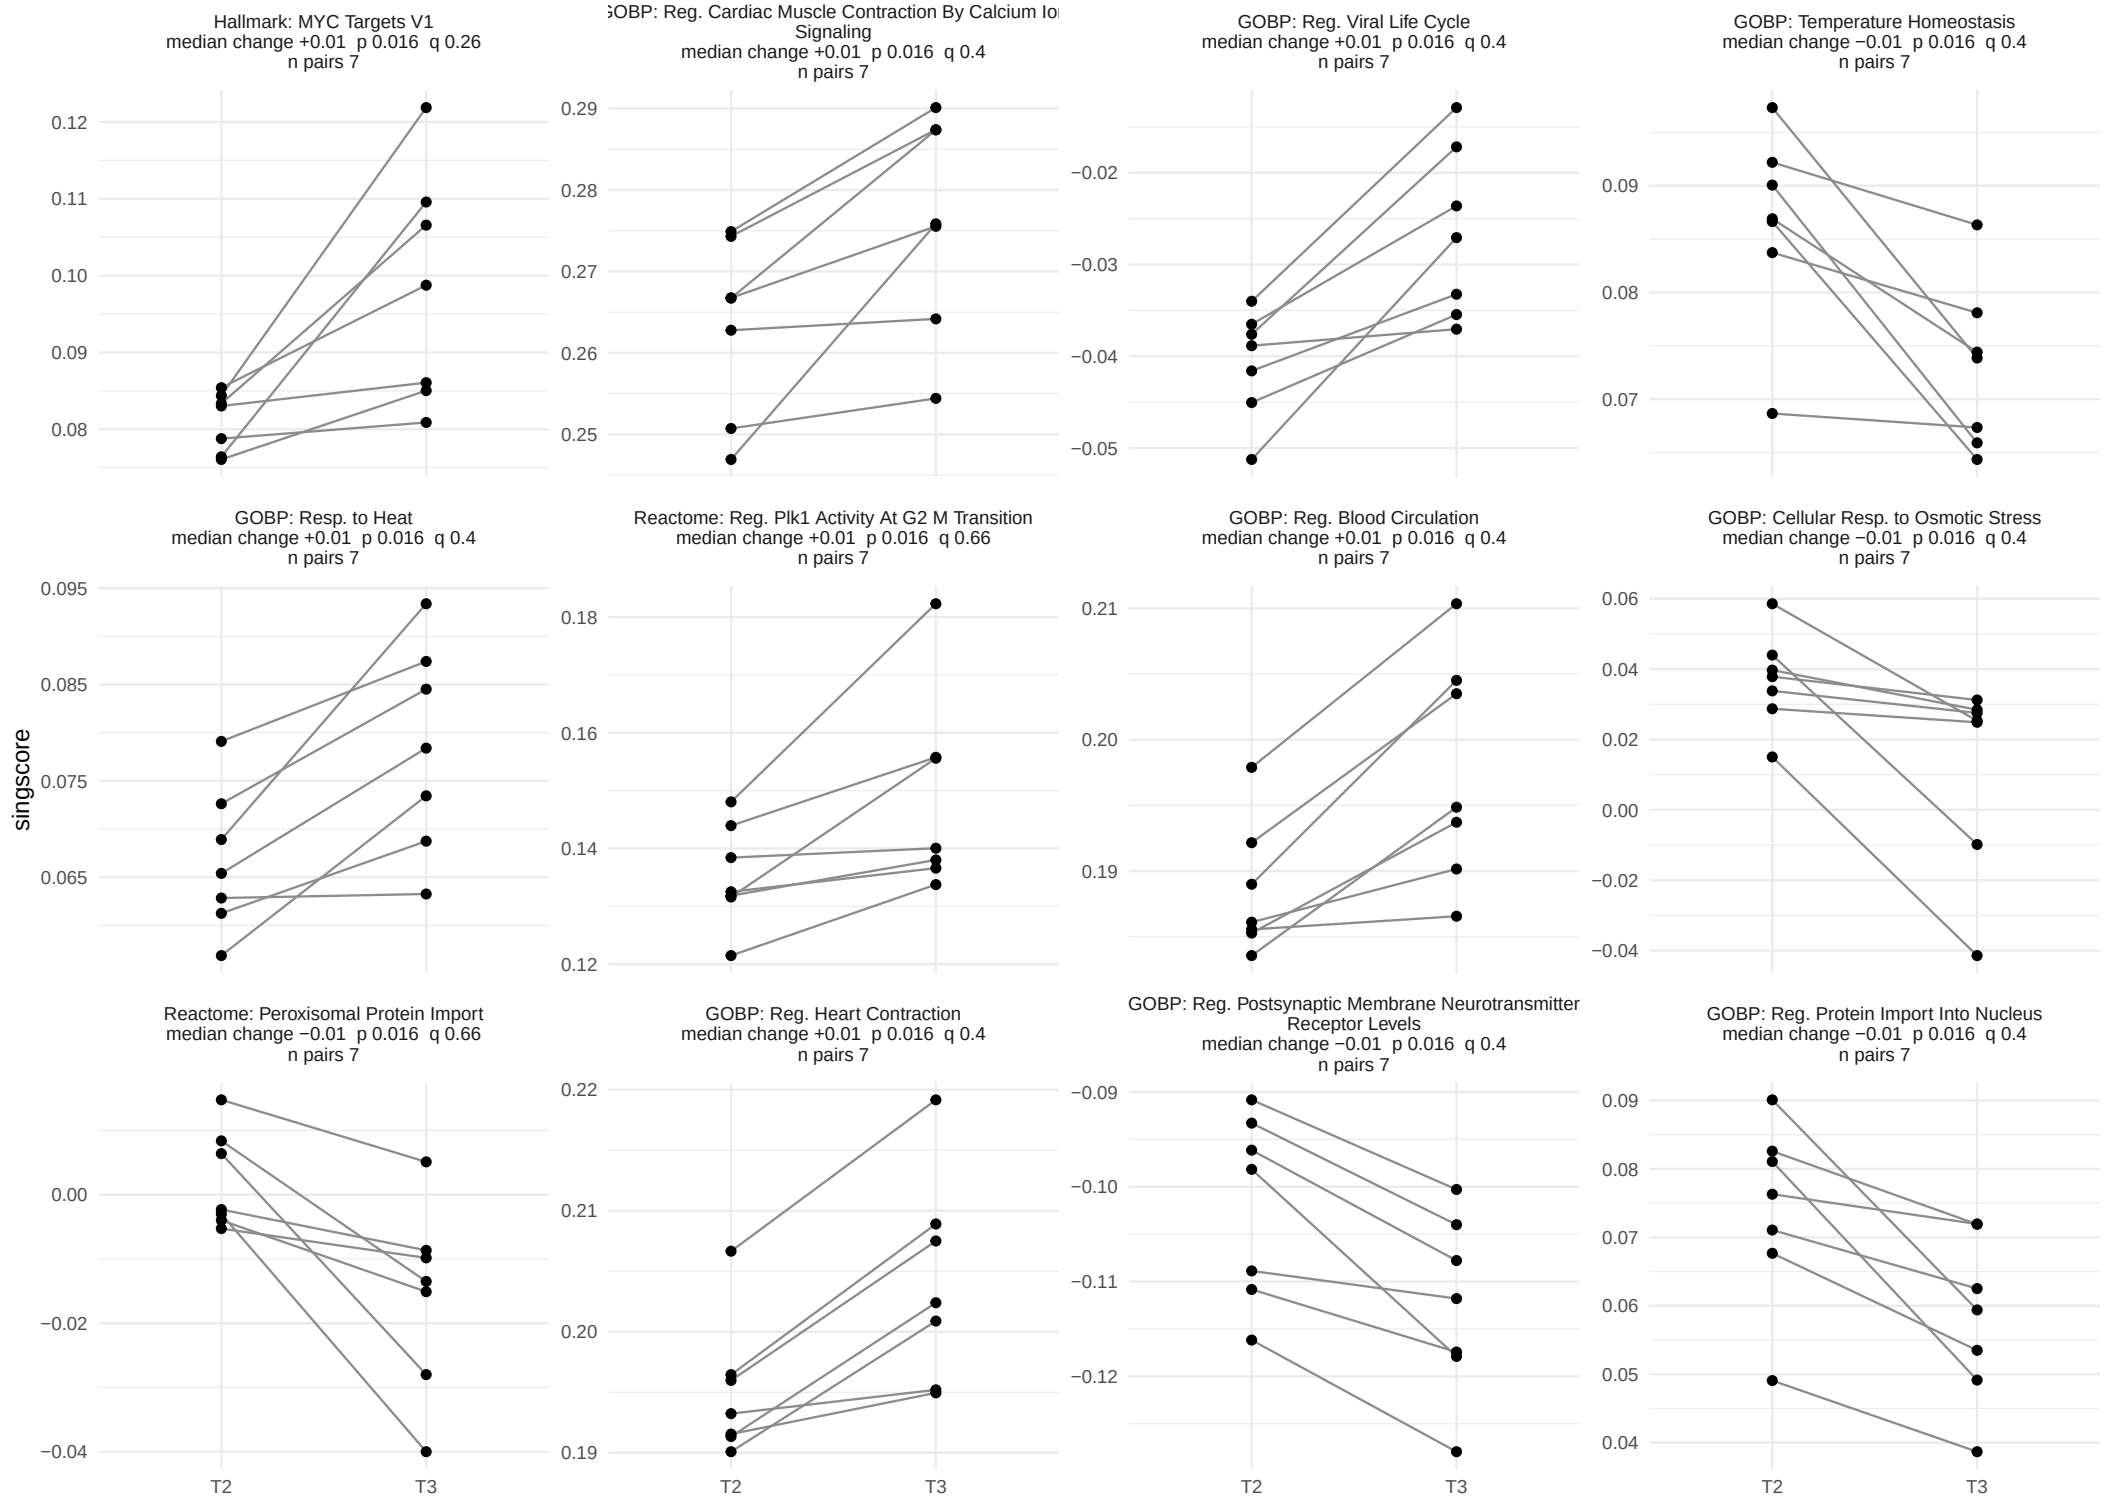

Wilcoxon signed−rank test on up to 7 pairs; smallest attainable p 0.016. Header: median paired change, p, BH q within task and collection, and the feature's complete pairs. Table: c_data/02_sets.xlsx, auc.

Acute bout, Lo (T2 to T3)


142 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 1 of 2.

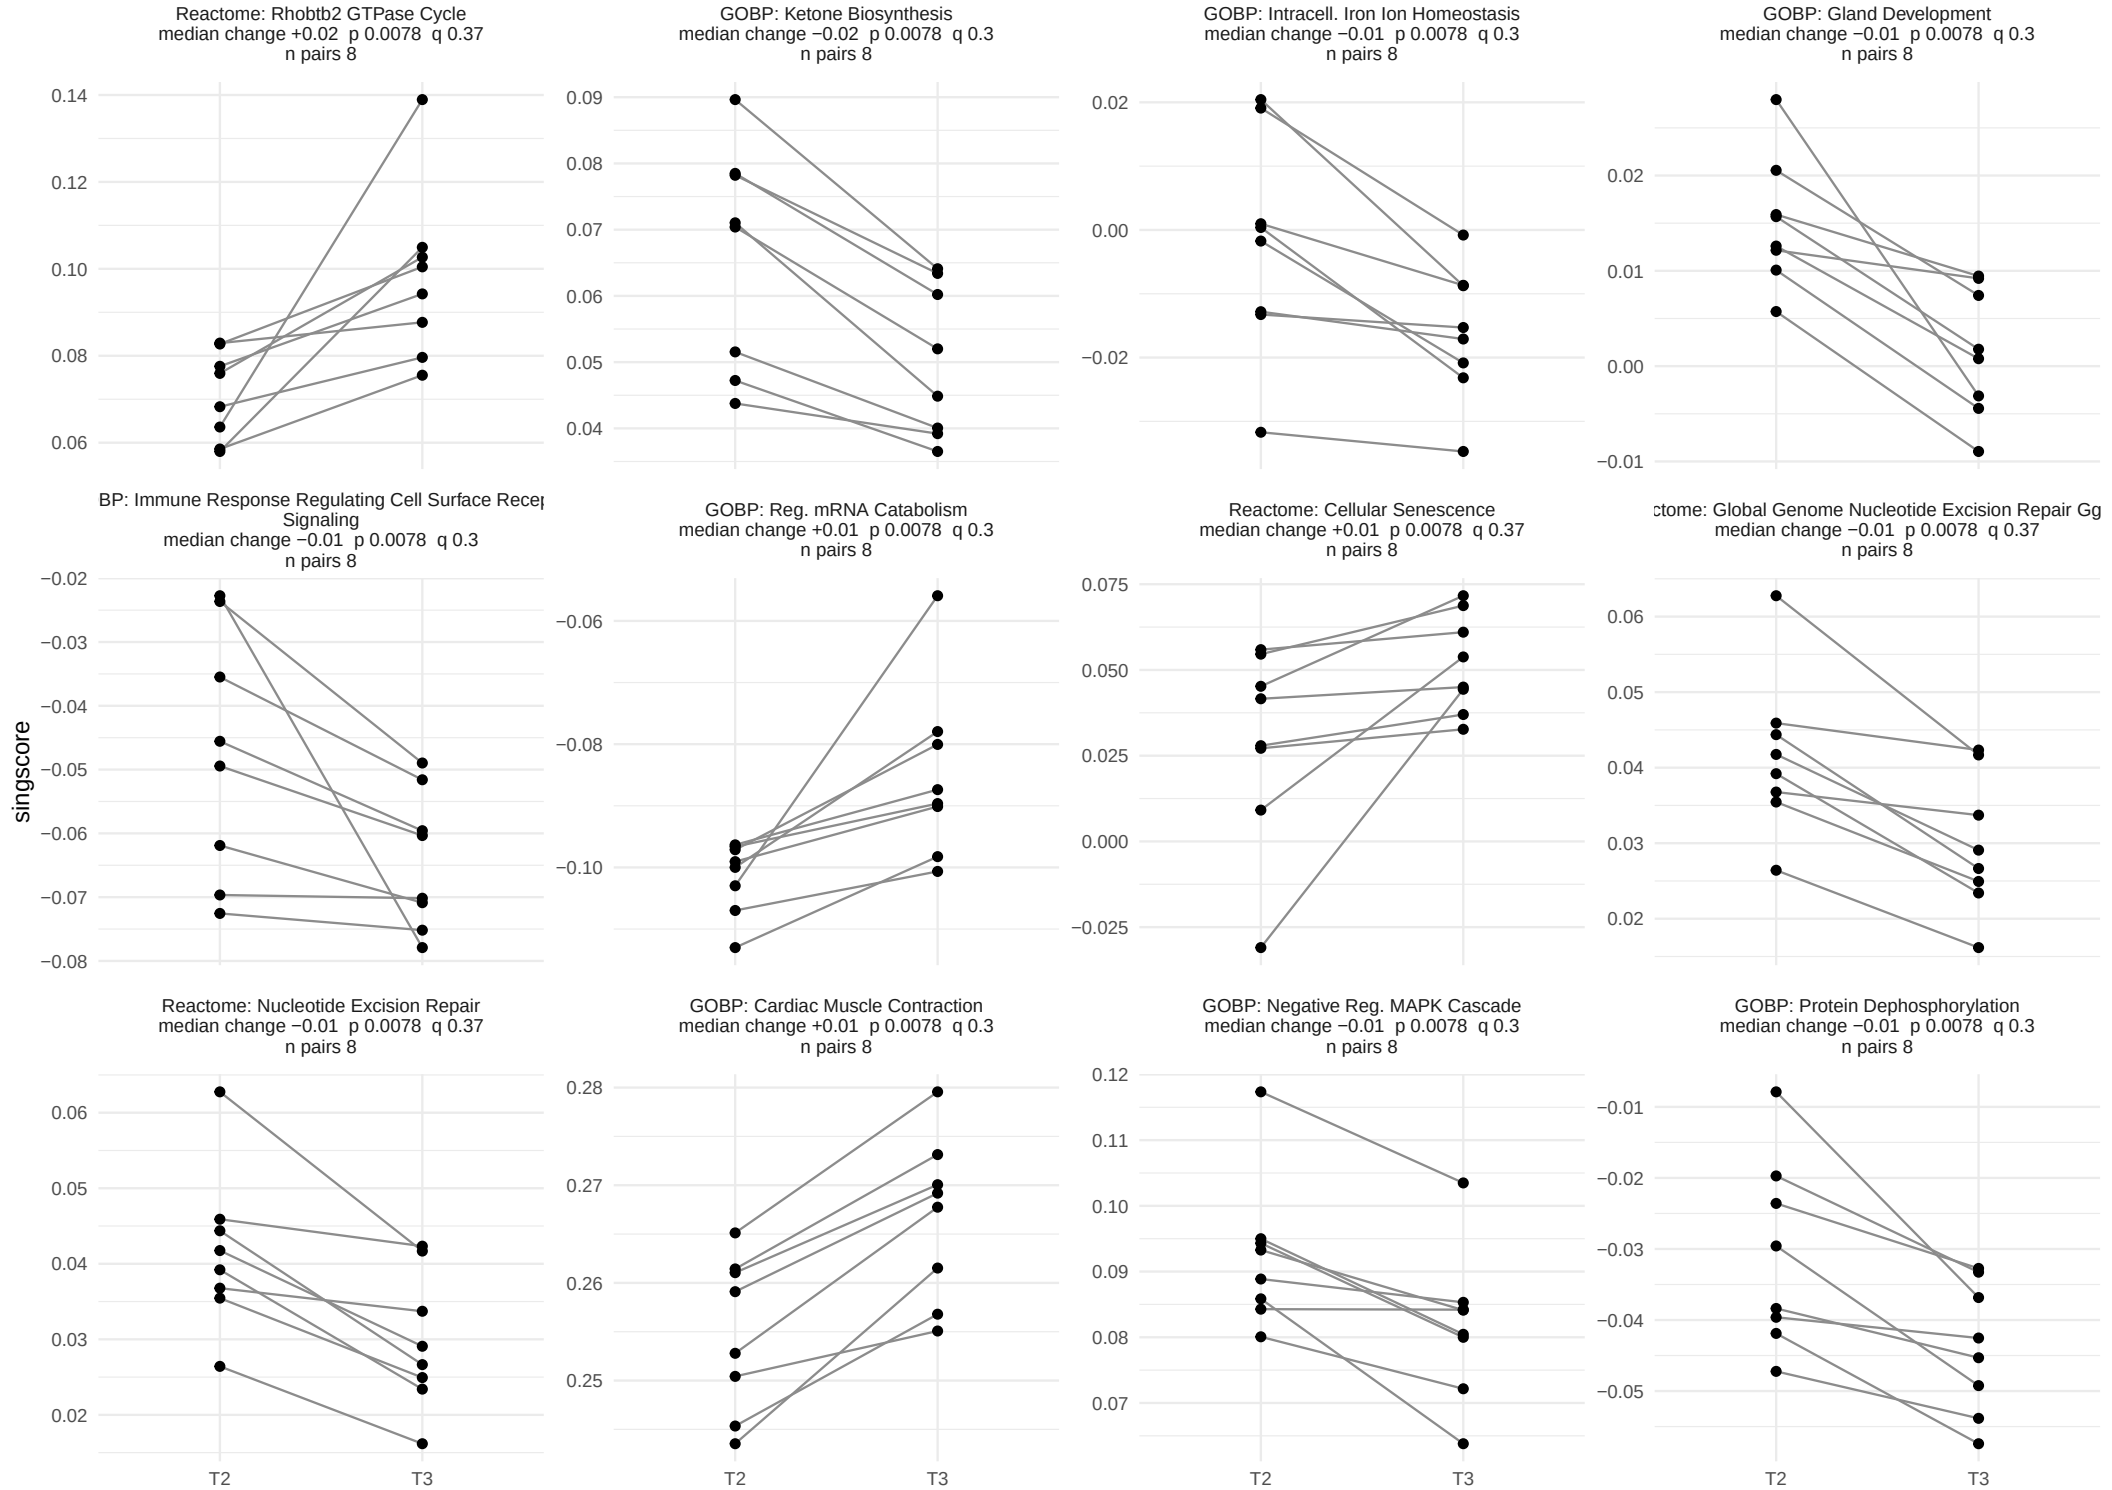

Wilcoxon signed−rank test on up to 8 pairs; smallest attainable p 0.0078. Header: median paired change, p, BH q within task and collection, and the feature's complete pairs. Table: c_data/02_sets.xlsx, auc.

Acute bout, Lo (T2 to T3)


142 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 2 of 2.

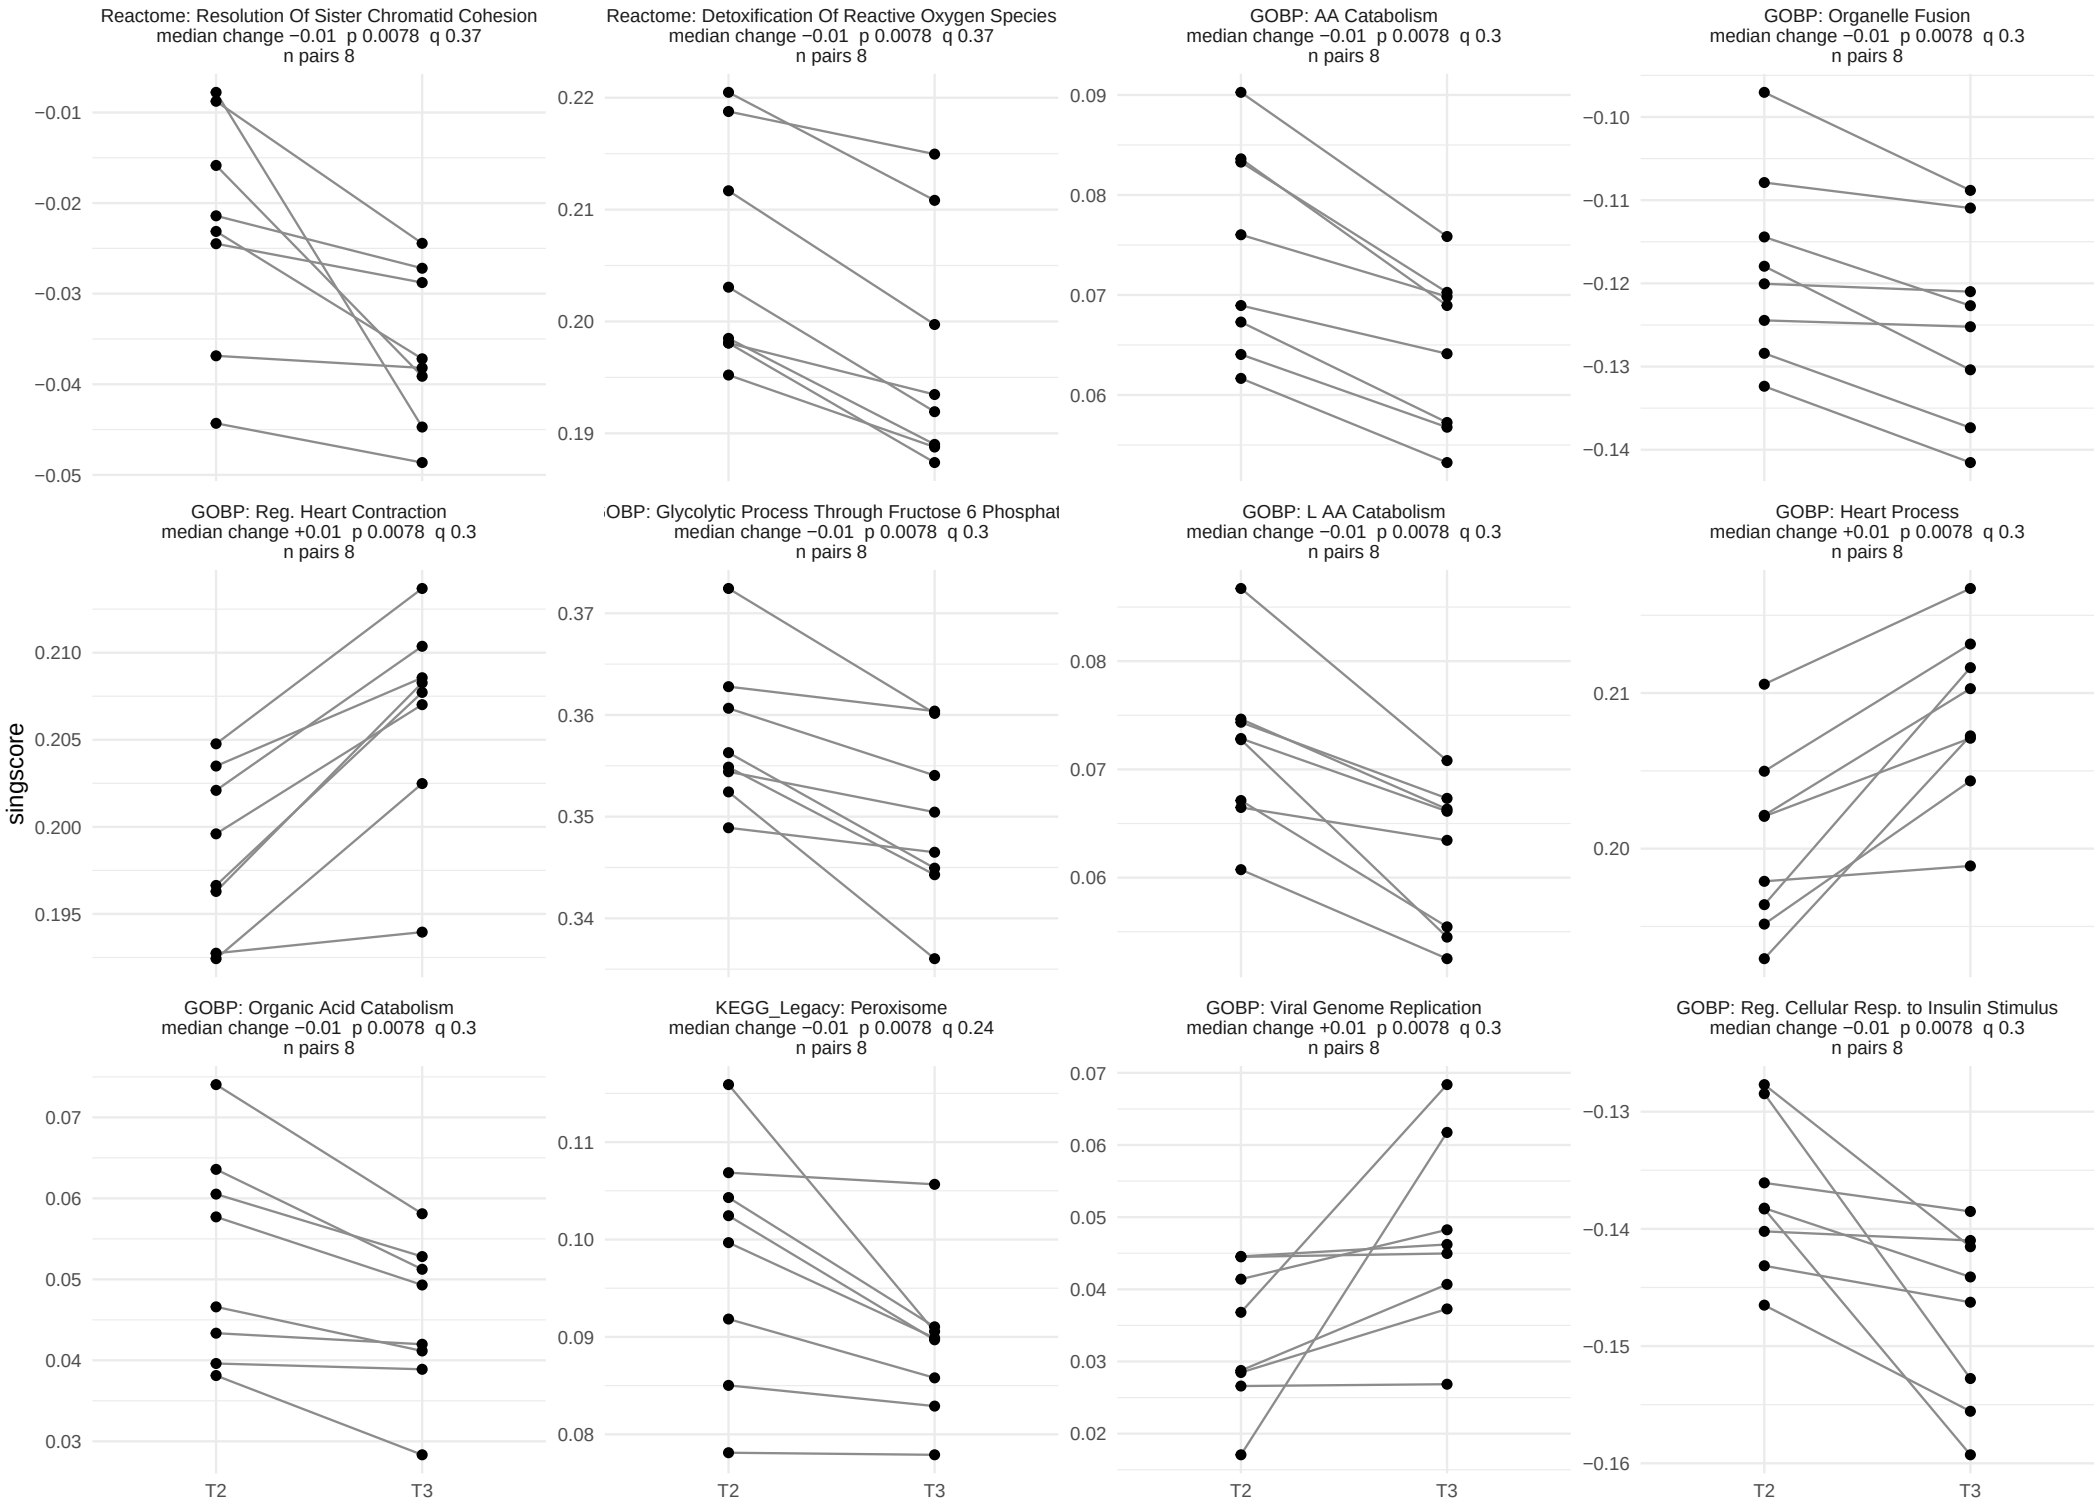

Wilcoxon signed−rank test on up to 8 pairs; smallest attainable p 0.0078. Header: median paired change, p, BH q within task and collection, and the feature's complete pairs. Table: c_data/02_sets.xlsx, auc.

Hi vs Lo at T1


24 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 1 of 2.

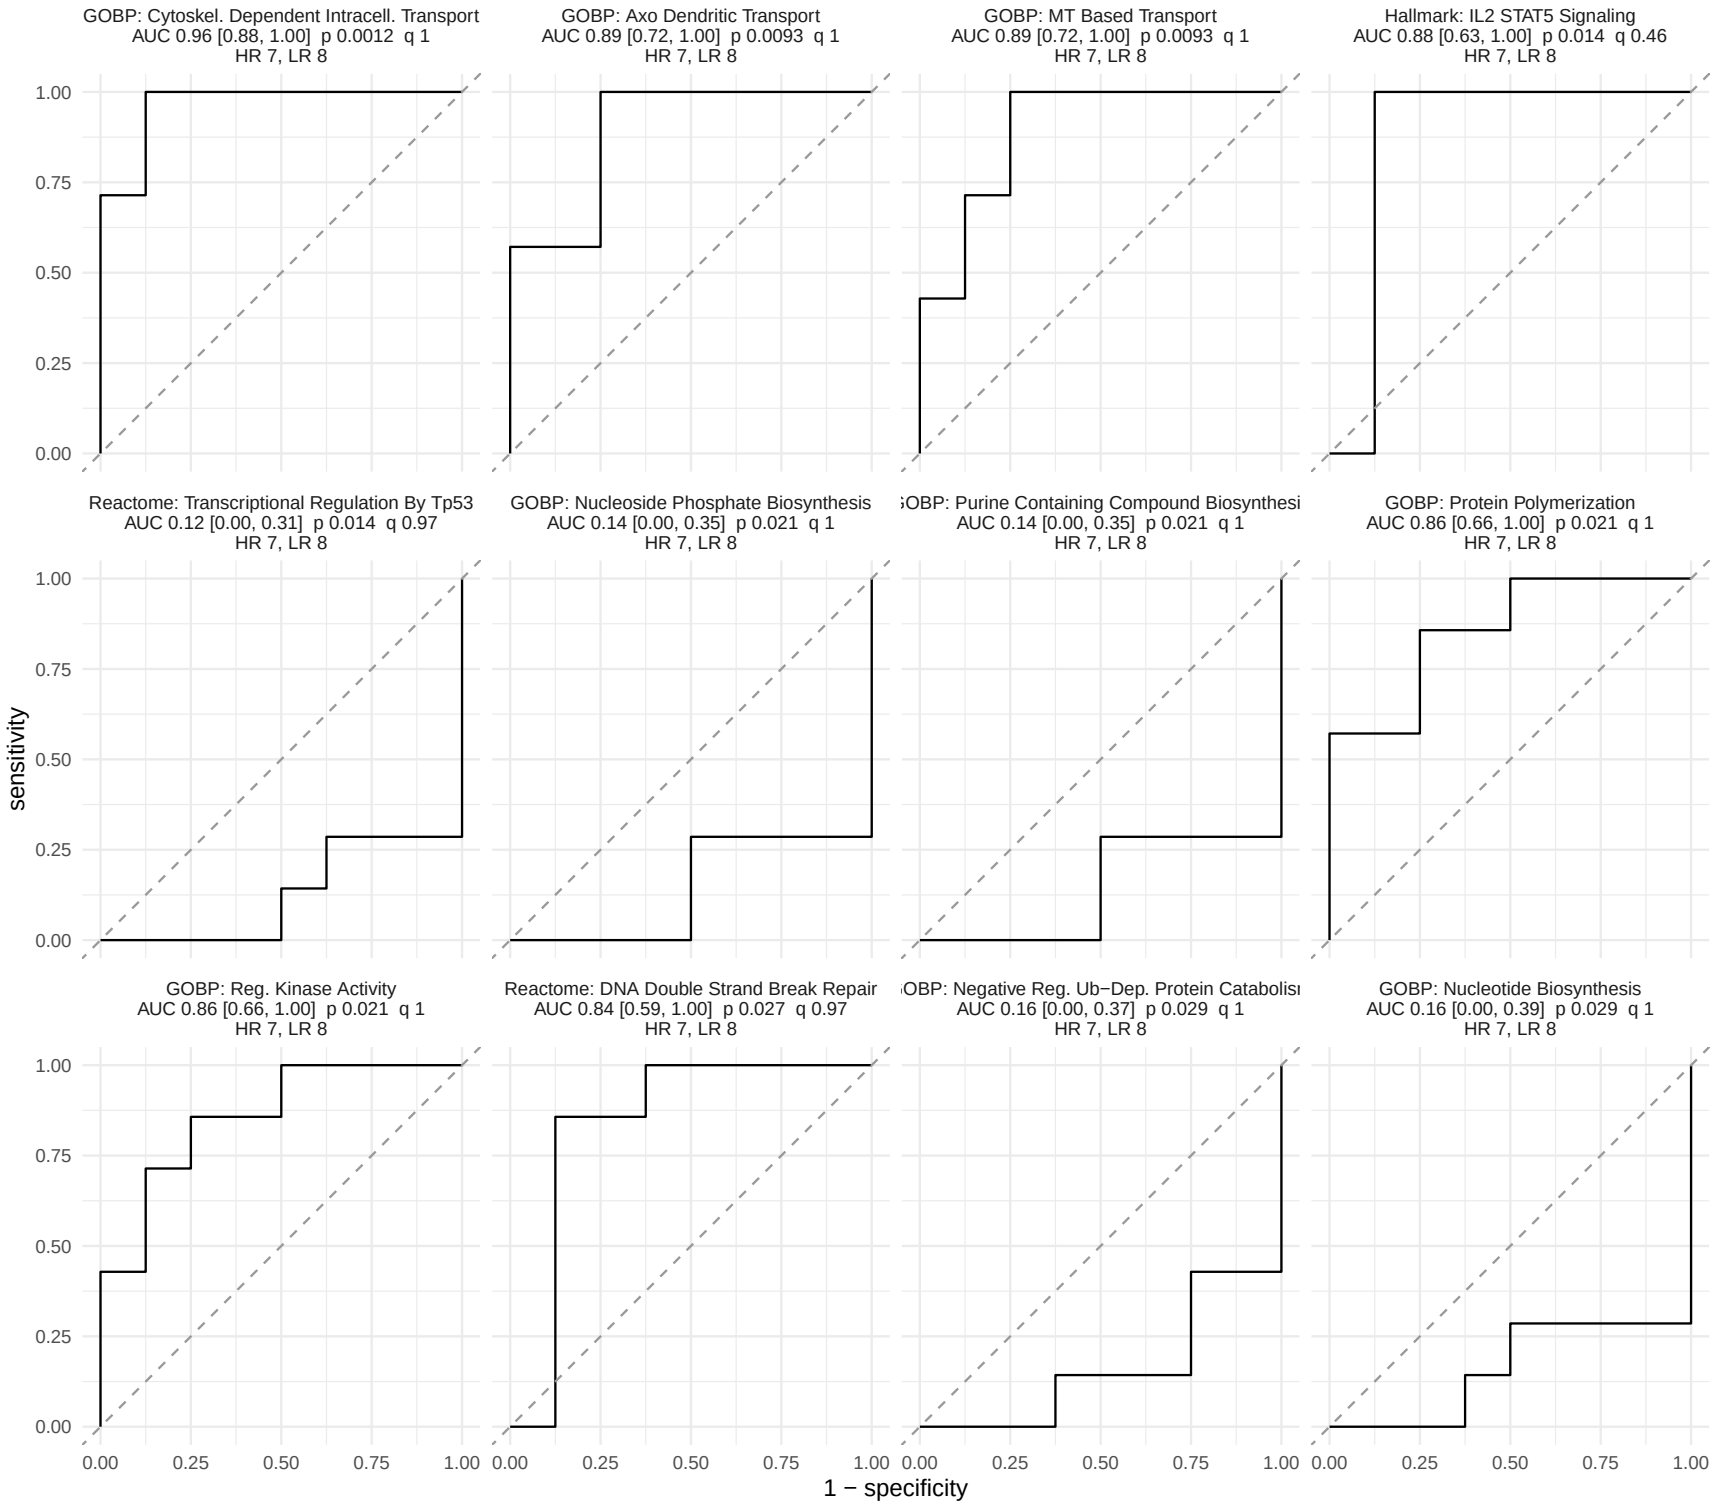

Hi (up to 7) against Lo (up to 8); AUC above 0.5 means higher in Hi. Wilcoxon rank−sum test; smallest attainable p 0.00031. Header: AUC with its DeLong 95% interval, p, none at AUC 0 or 1, where DeLong's variance is ze

Hi vs Lo at T1


24 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 2 of 2.

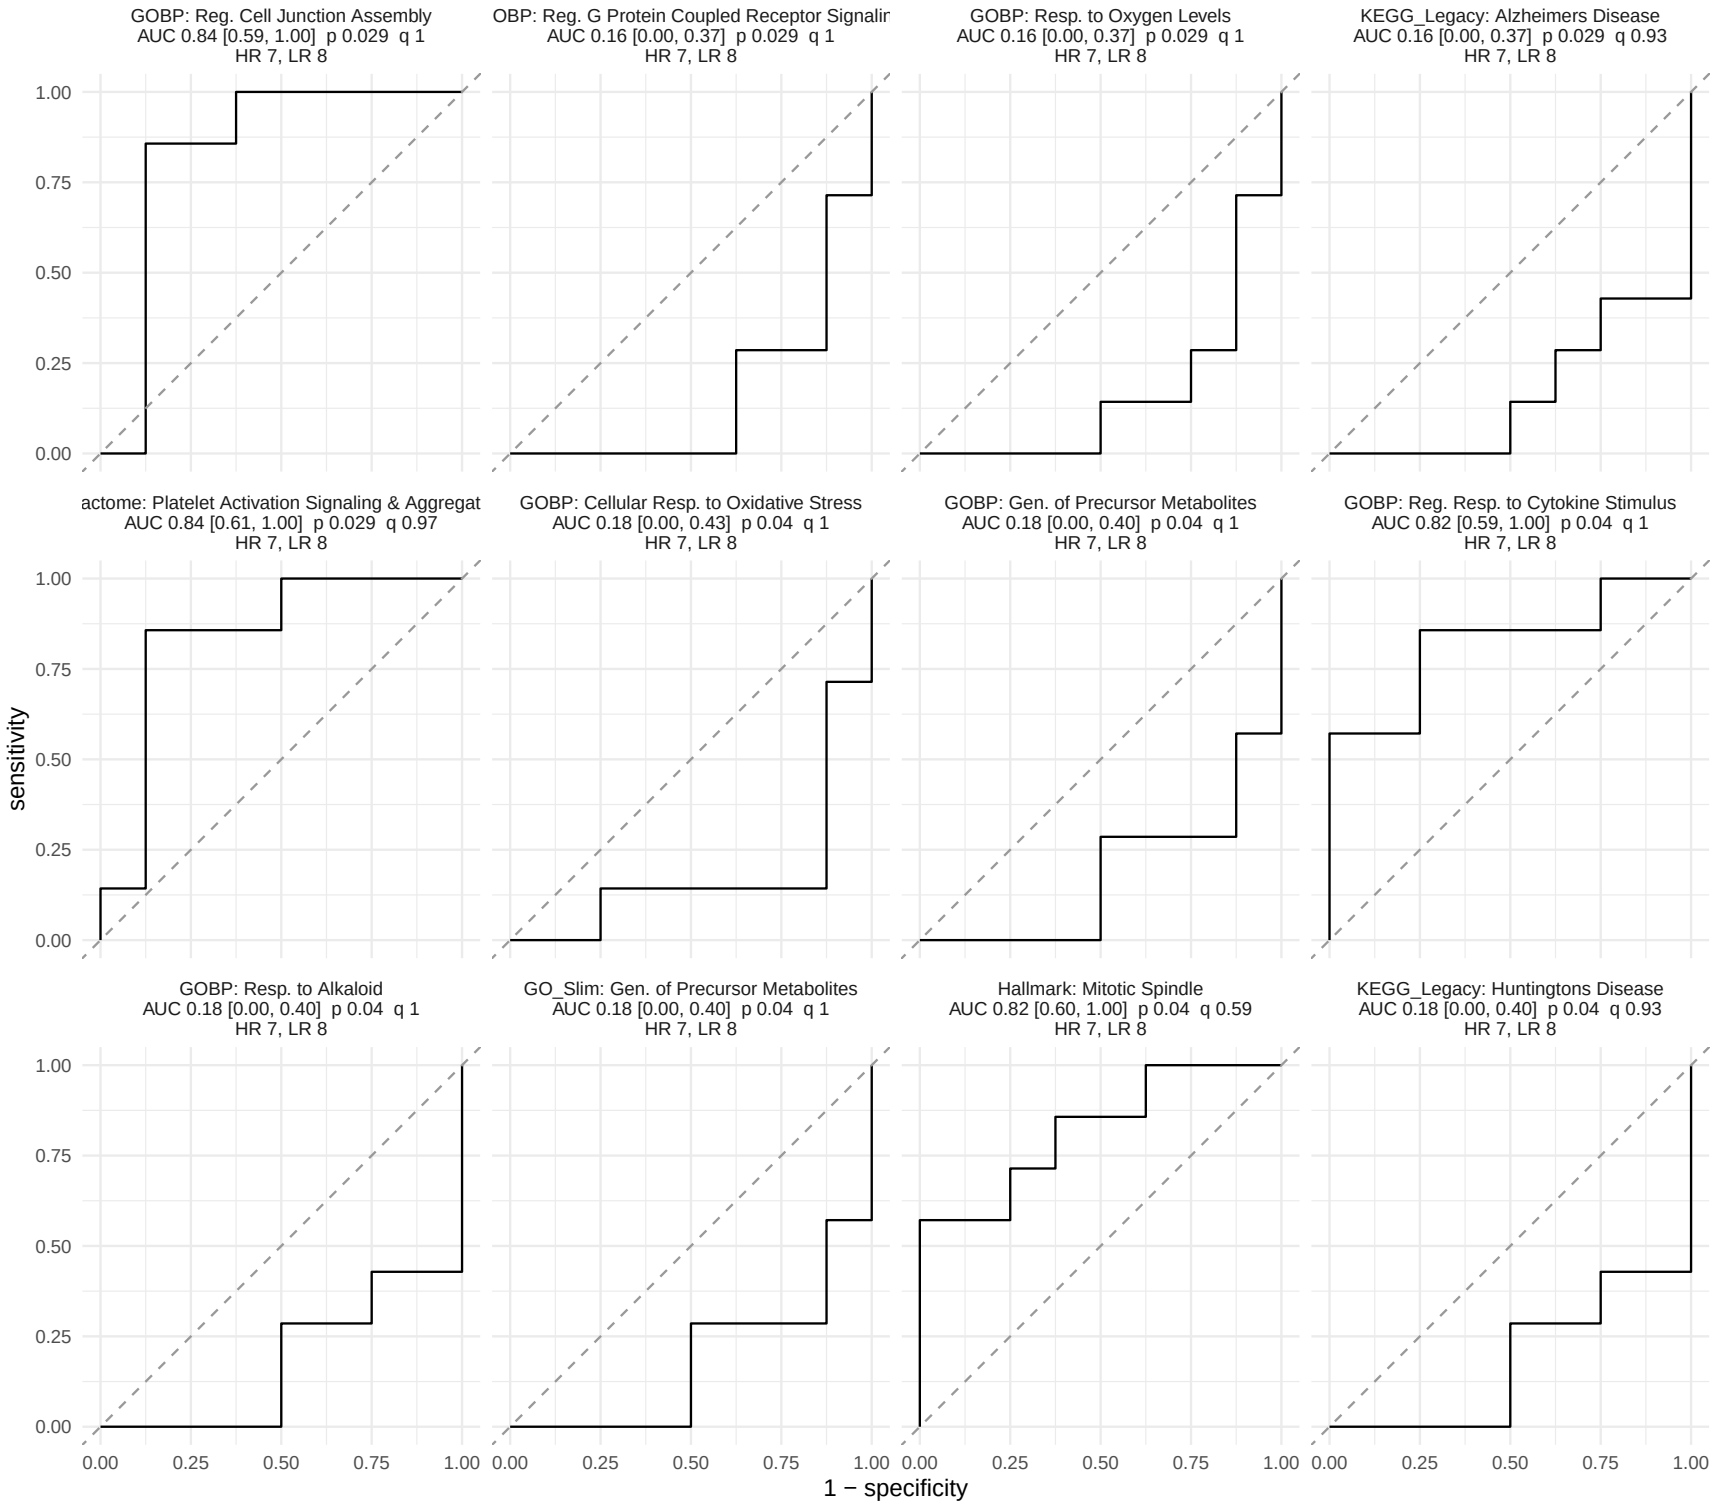

Hi (up to 7) against Lo (up to 8); AUC above 0.5 means higher in Hi. Wilcoxon rank−sum test; smallest attainable p 0.00031. Header: AUC with its DeLong 95% interval, p, none at AUC 0 or 1, where DeLong's variance is ze

Hi vs Lo at T2


12 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 1 of 1.

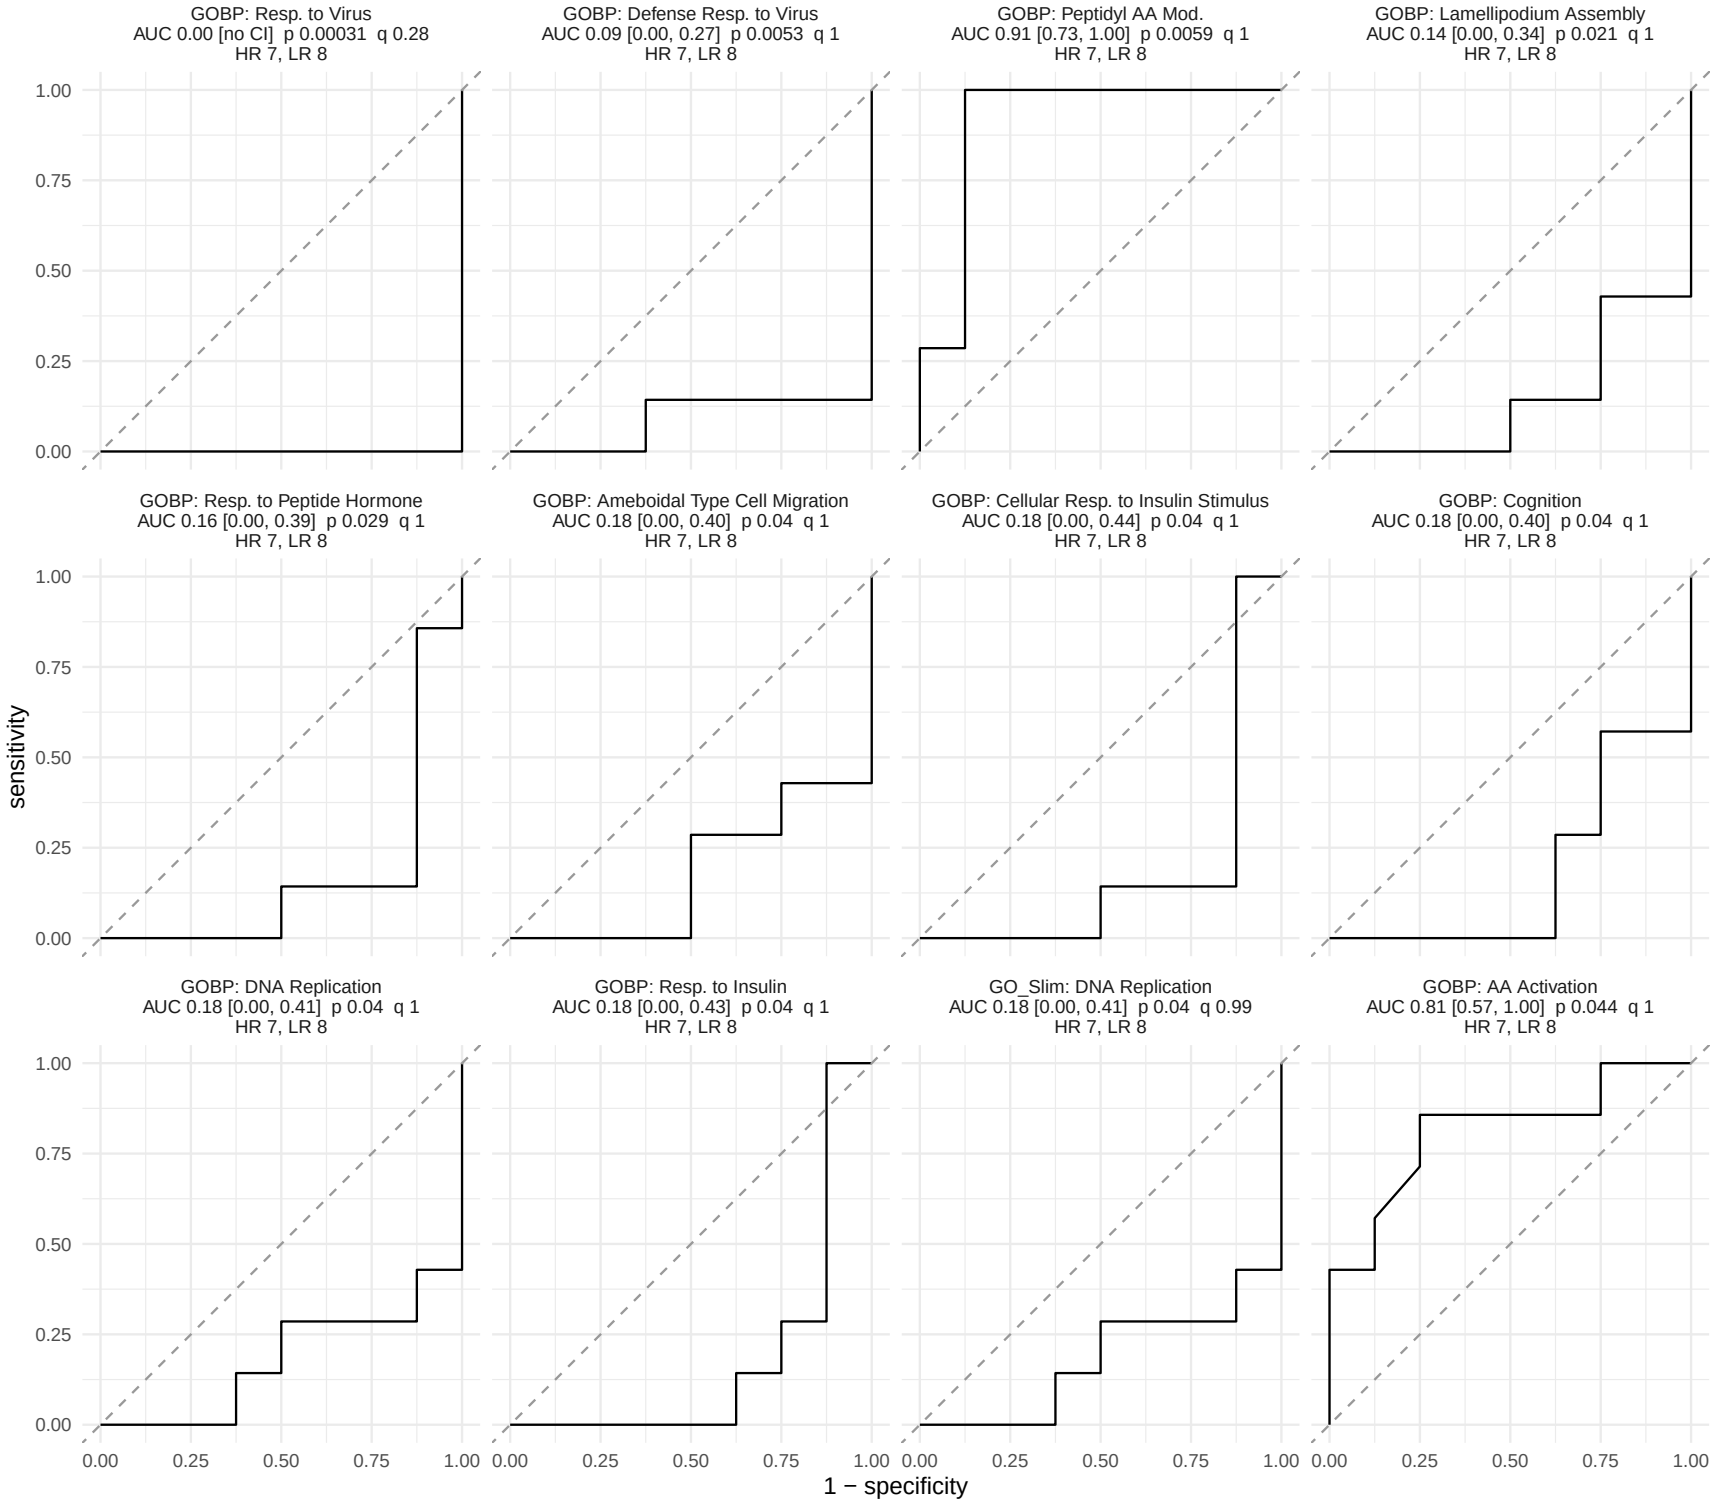

Hi (up to 7) against Lo (up to 8); AUC above 0.5 means higher in Hi. Wilcoxon rank−sum test; smallest attainable p 0.00031. Header: AUC with its DeLong 95% interval, p, none at AUC 0 or 1, where DeLong's variance is ze

Hi vs Lo, training change


49 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 1 of 2.

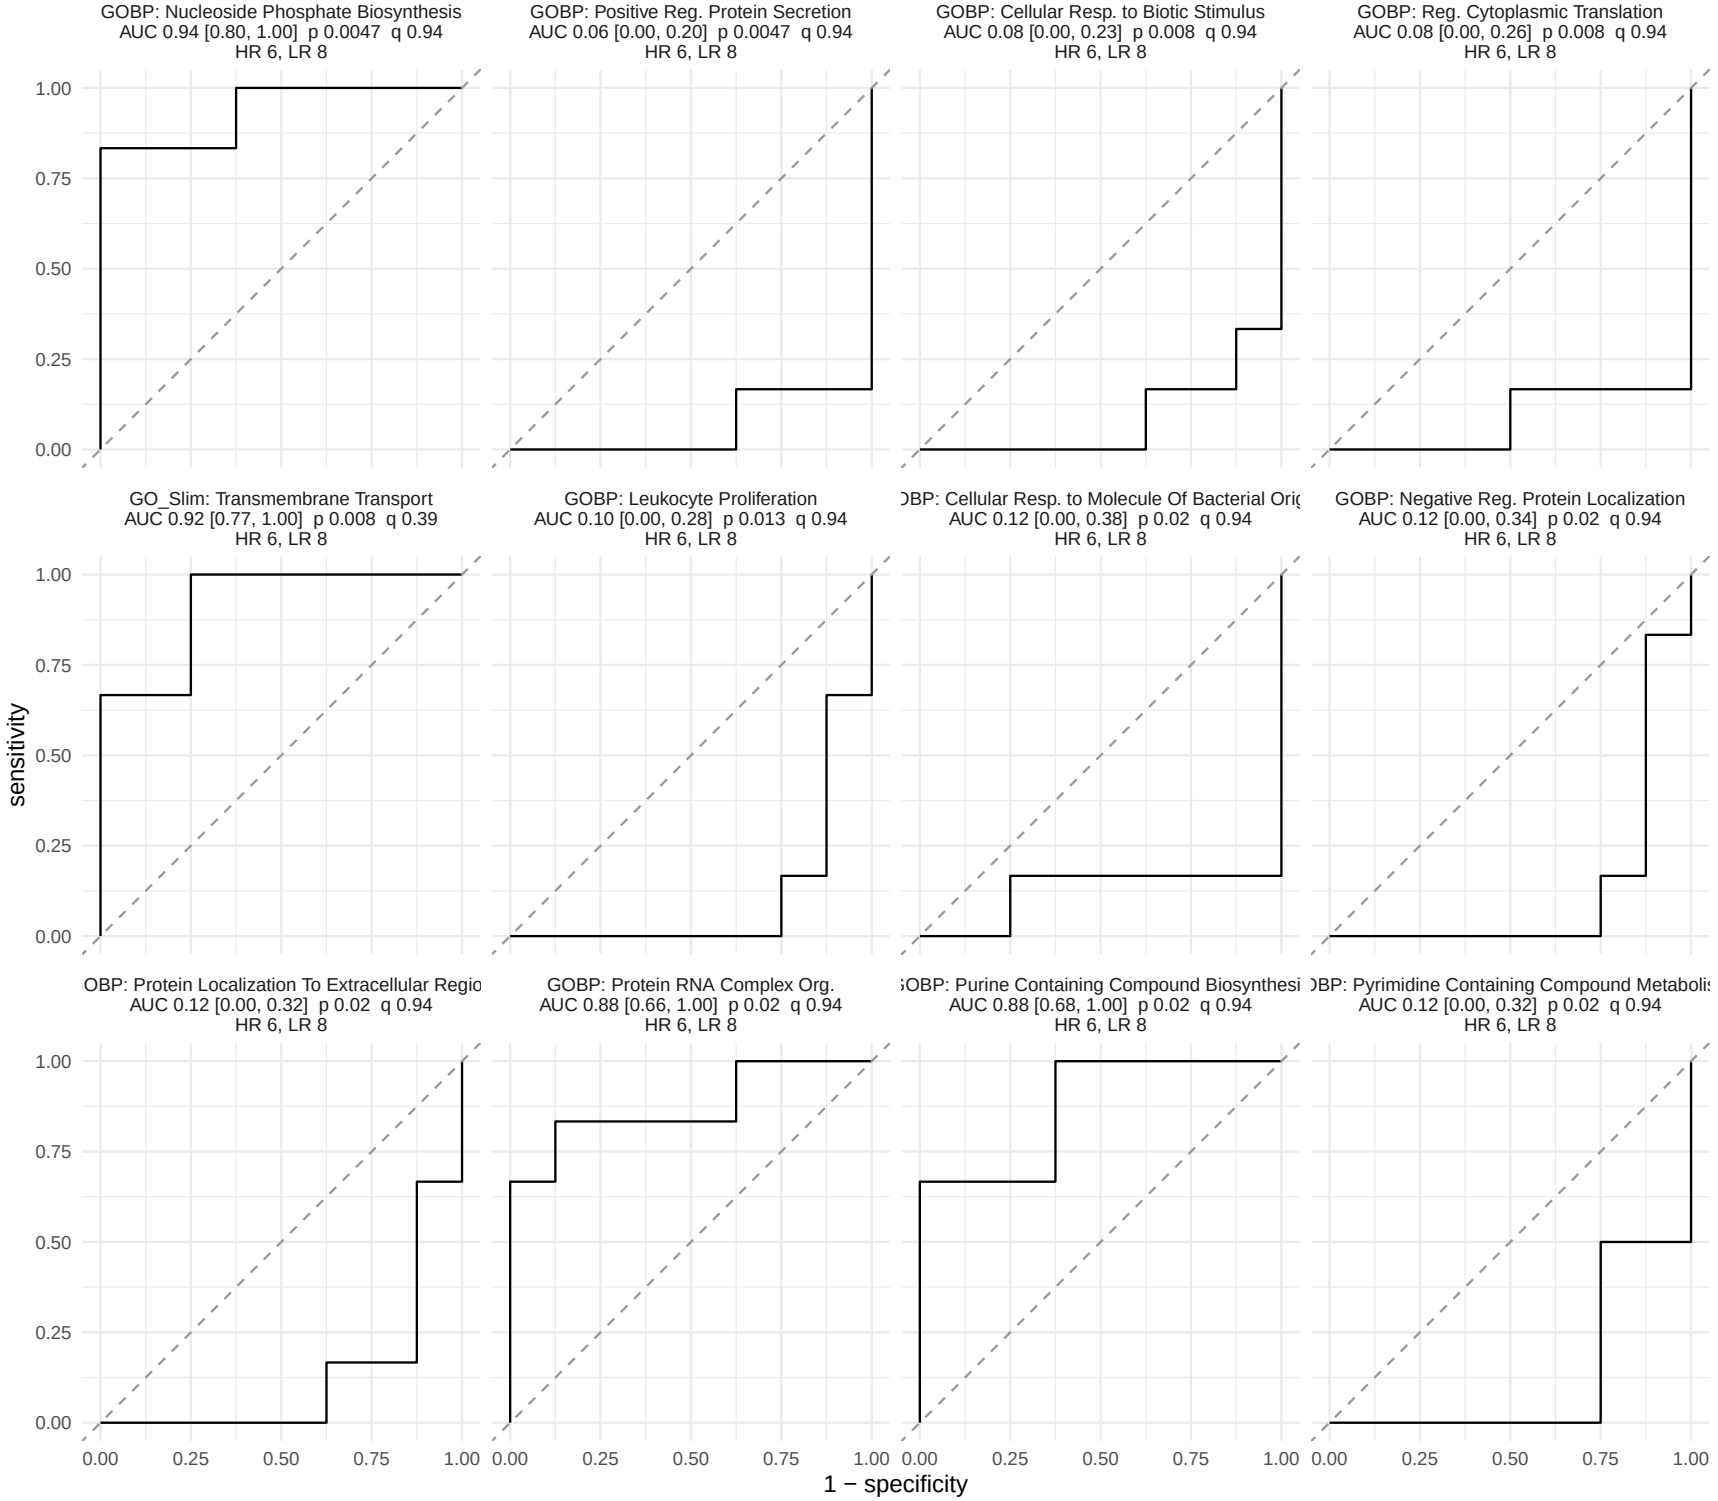

Hi (up to 6) against Lo (up to 8); AUC above 0.5 means higher in Hi. Wilcoxon rank−sum test; smallest attainable p 0.00067. Header: AUC with its DeLong 95% interval, p, none at AUC 0 or 1, where DeLong's variance is ze

Hi vs Lo, training change


49 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 2 of 2.

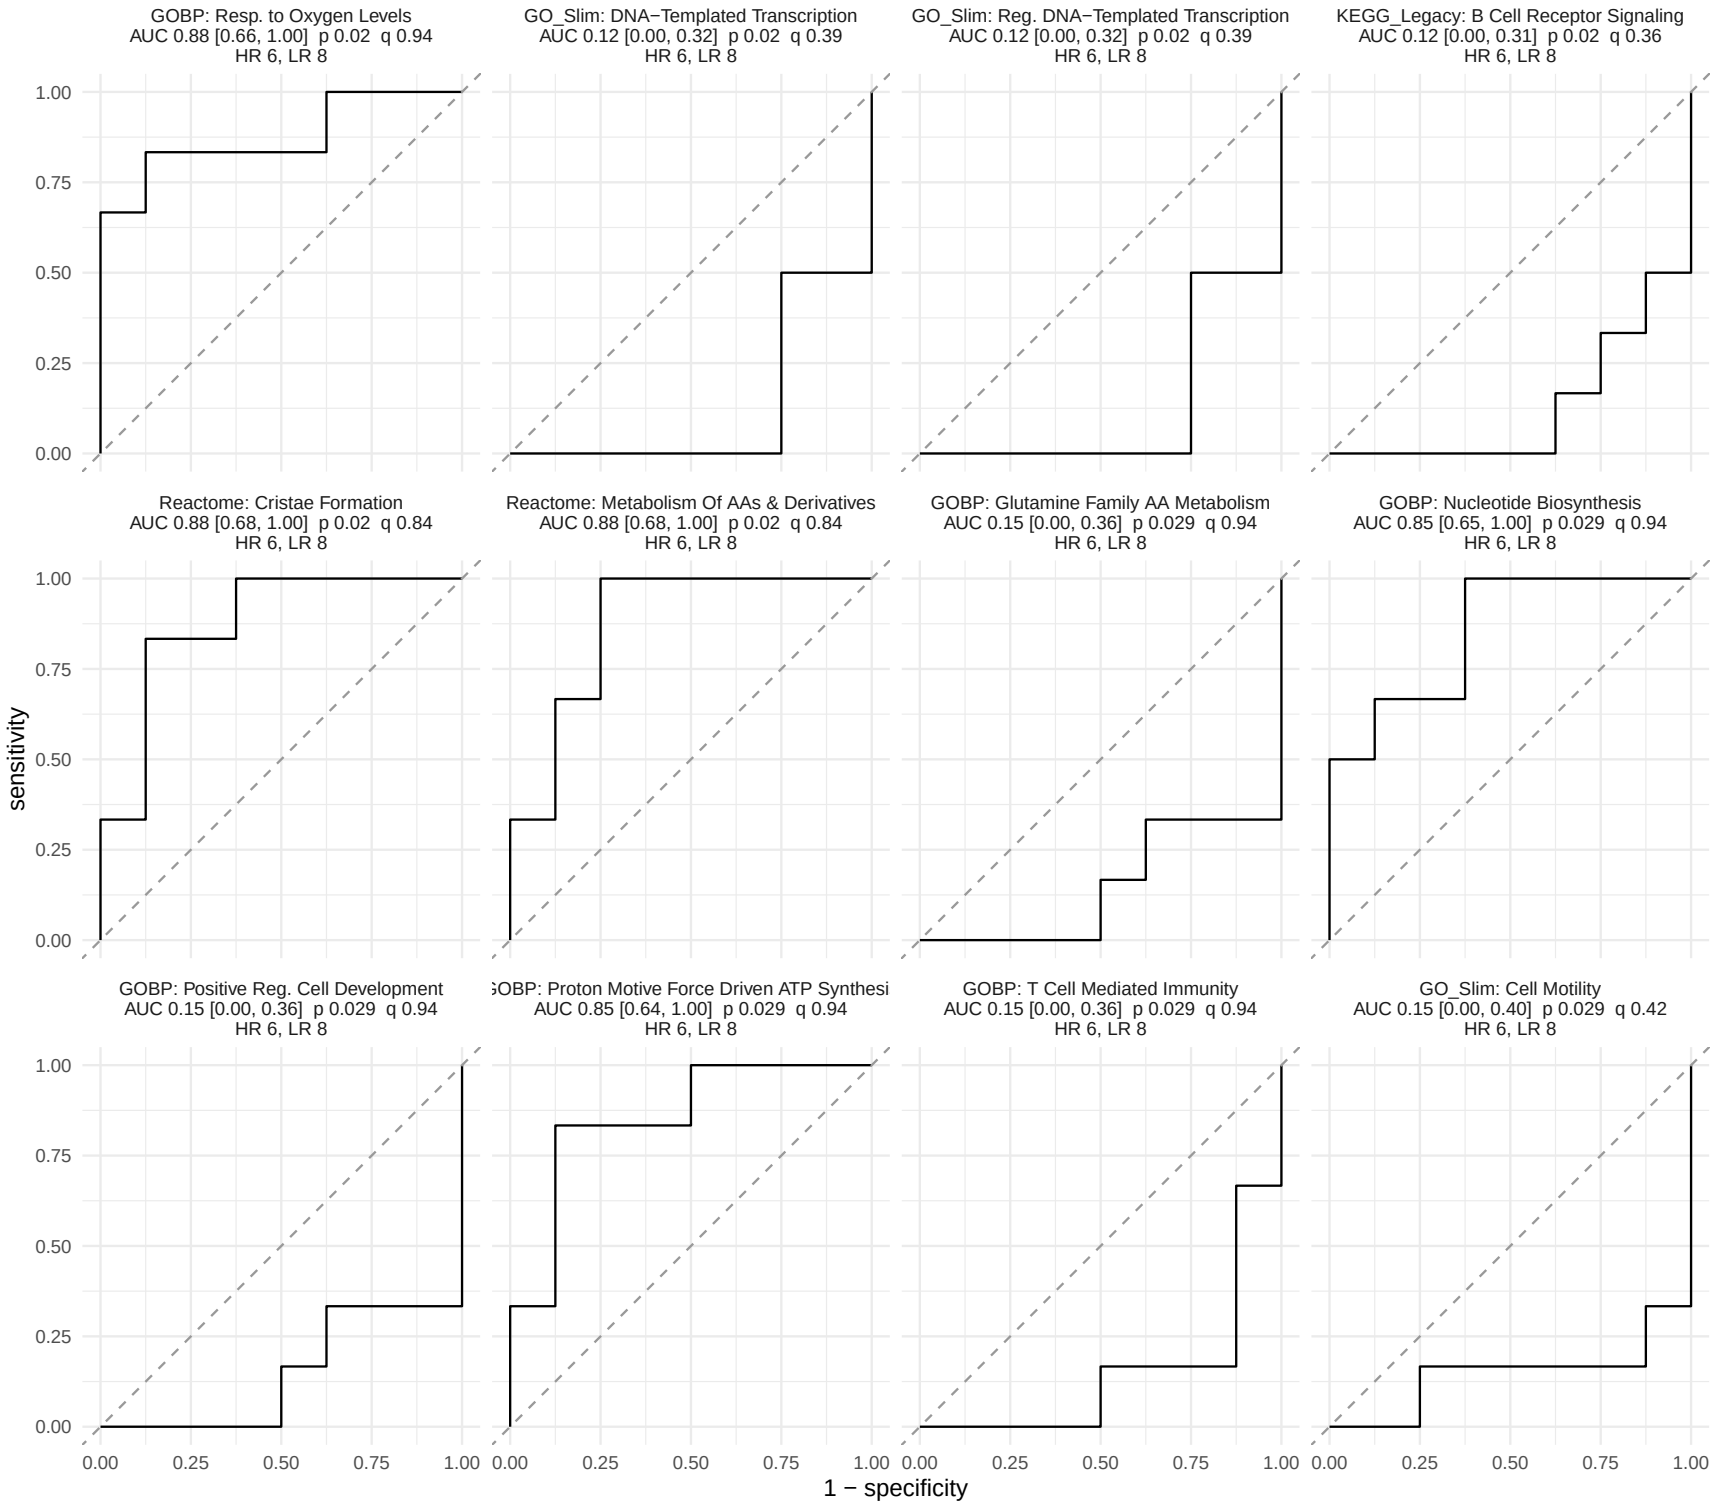

Hi (up to 6) against Lo (up to 8); AUC above 0.5 means higher in Hi. Wilcoxon rank−sum test; smallest attainable p 0.00067. Header: AUC with its DeLong 95% interval, p, none at AUC 0 or 1, where DeLong's variance is ze

Hi vs Lo, acute change


32 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 1 of 2.

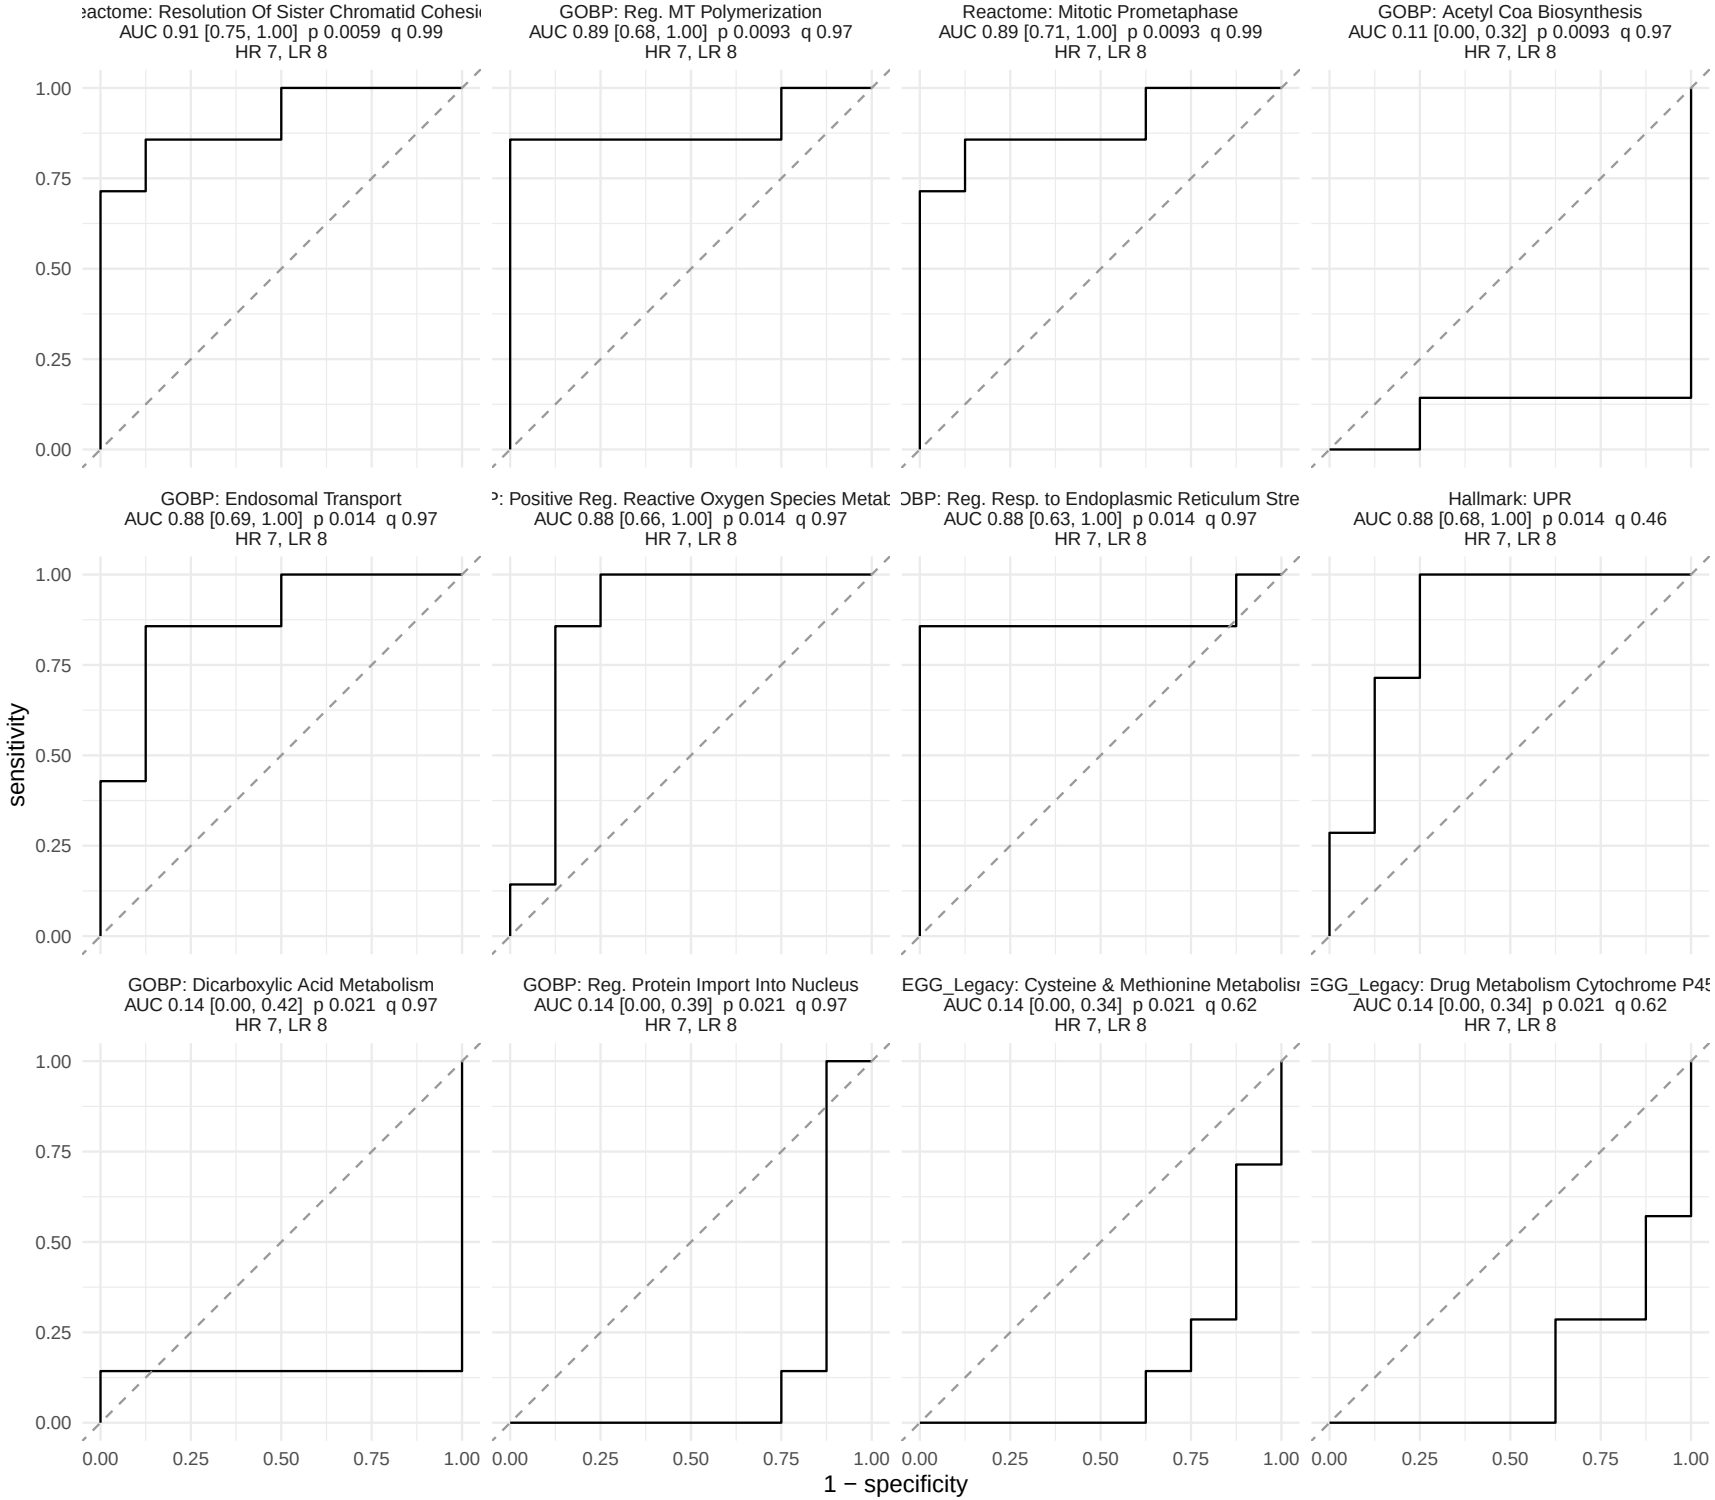

Hi (up to 7) against Lo (up to 8); AUC above 0.5 means higher in Hi. Wilcoxon rank−sum test; smallest attainable p 0.00031. Header: AUC with its DeLong 95% interval, p, none at AUC 0 or 1, where DeLong's variance is ze

Hi vs Lo, acute change

32 of 1378 sets at p < 0.05, 0 at BH < 0.05. Page 2 of 2.

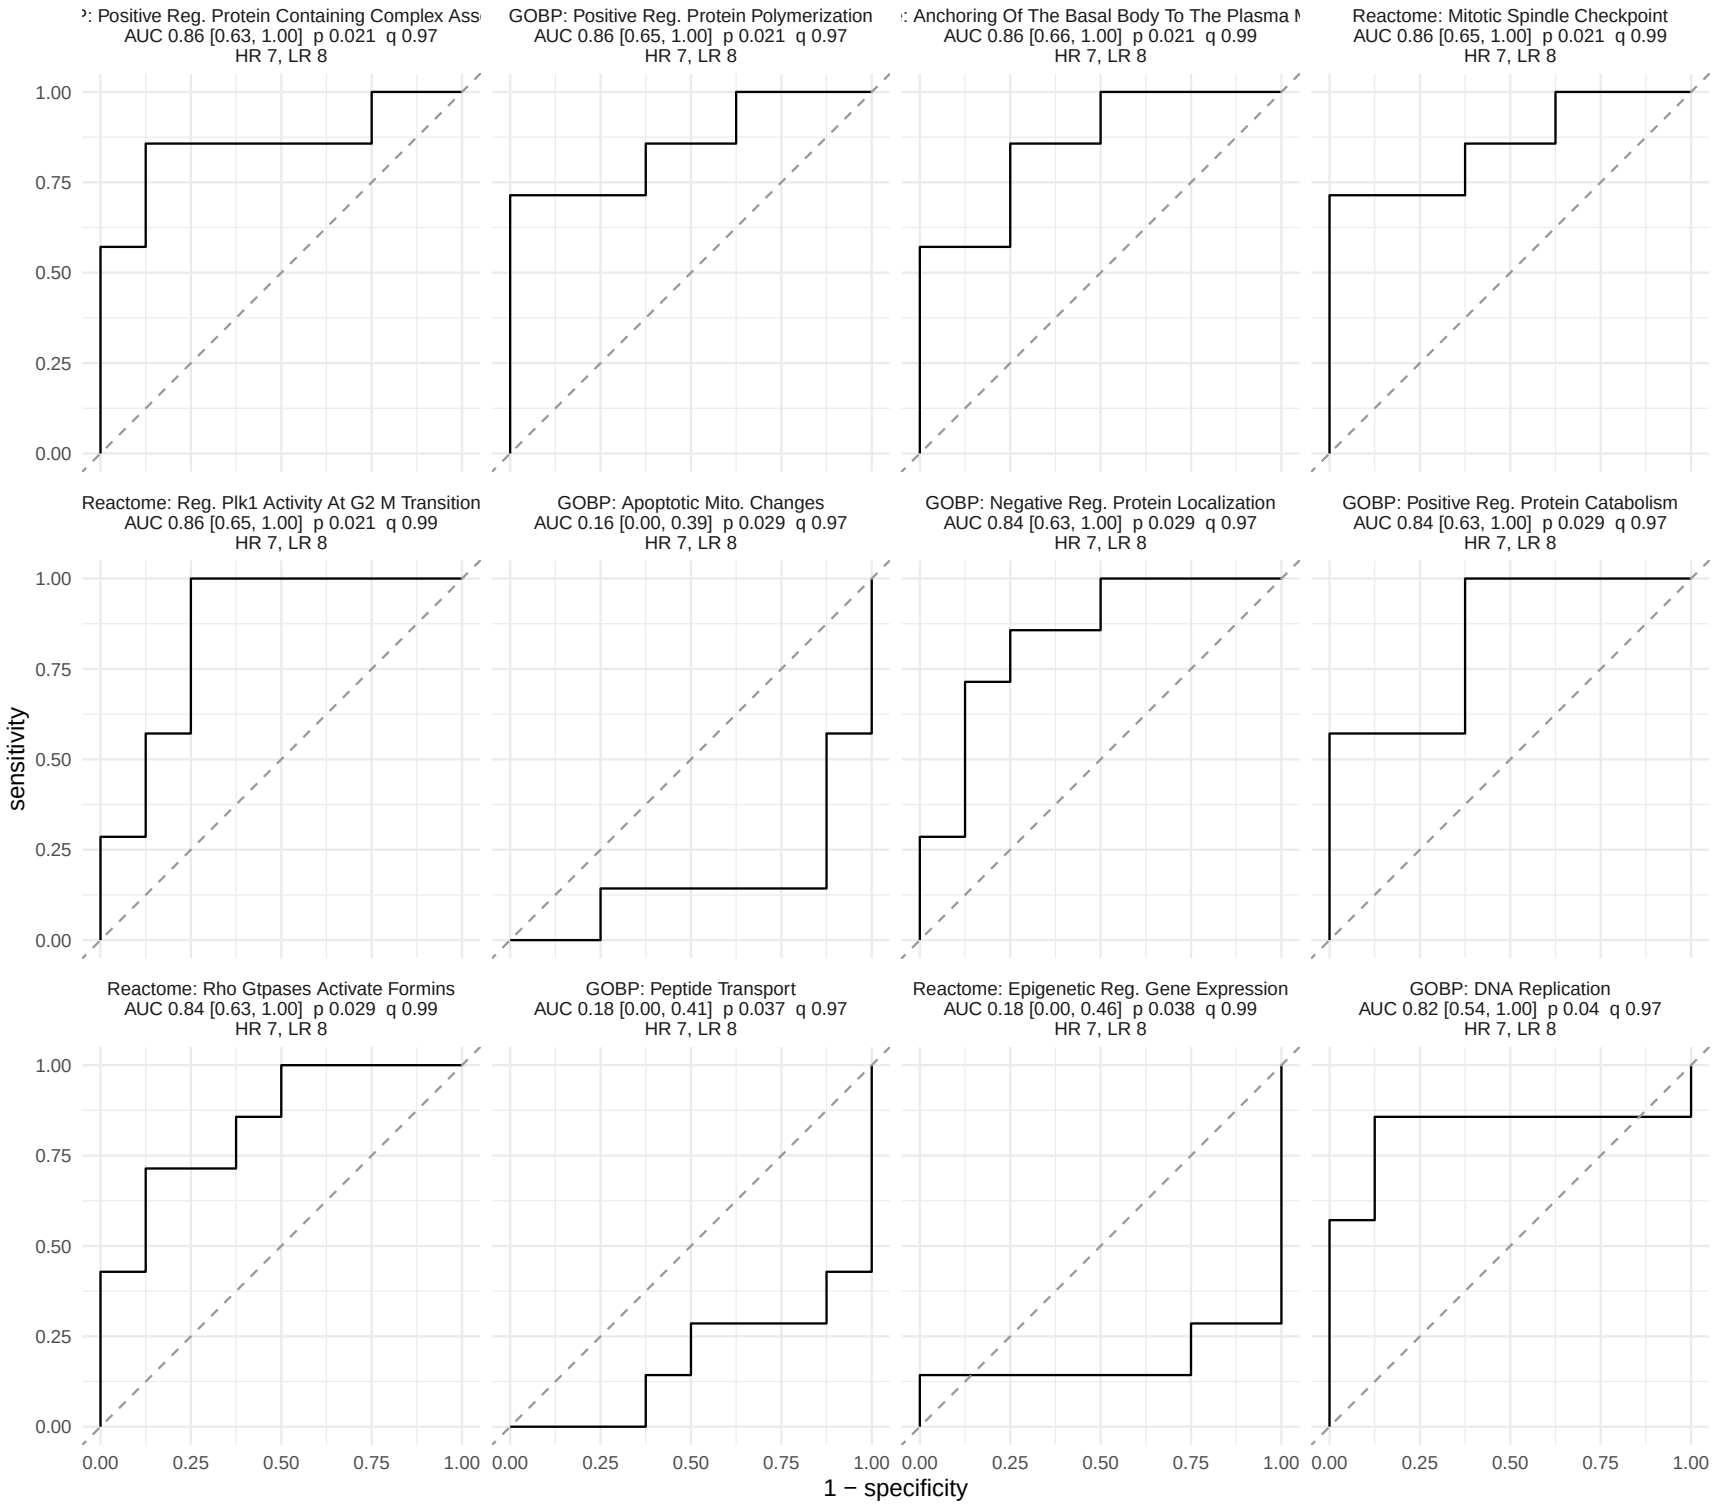

Hi (up to 7) against Lo (up to 8); AUC above 0.5 means higher in Hi. Wilcoxon rank−sum test; smallest attainable p 0.00031. Header: AUC with its DeLong 95% interval, p, none at AUC 0 or 1, where DeLong's variance is ze