

Module enrichment

clusterProfiler ORA, universe 1900 measured genes; top 3 sets per module at BH < 0.05

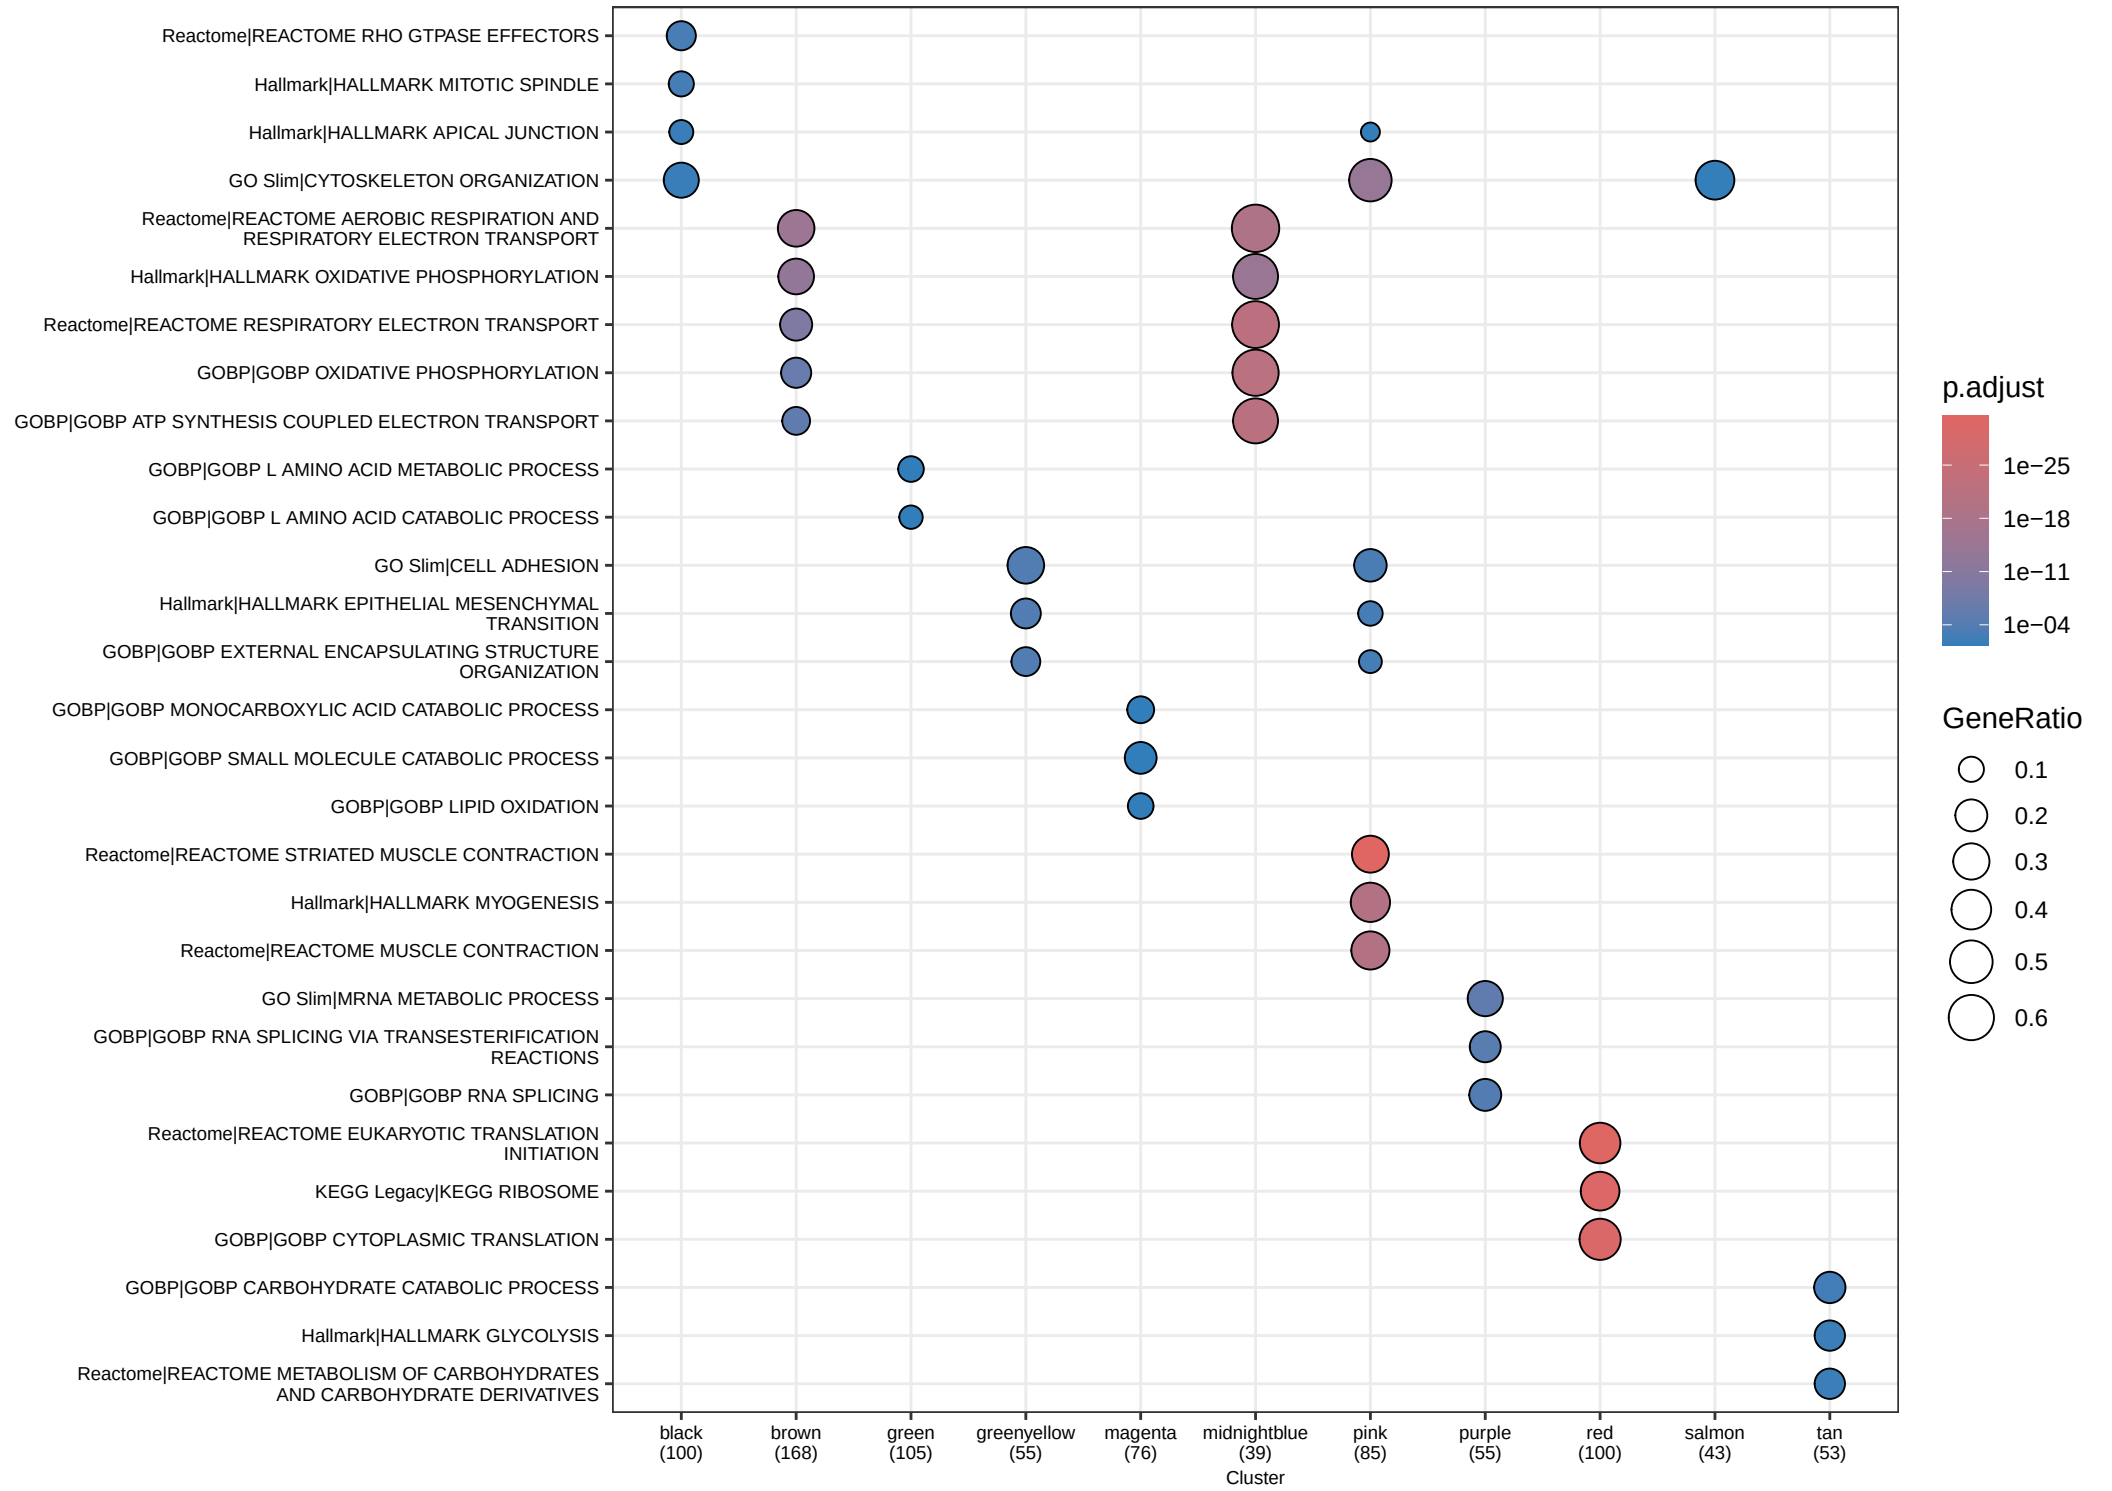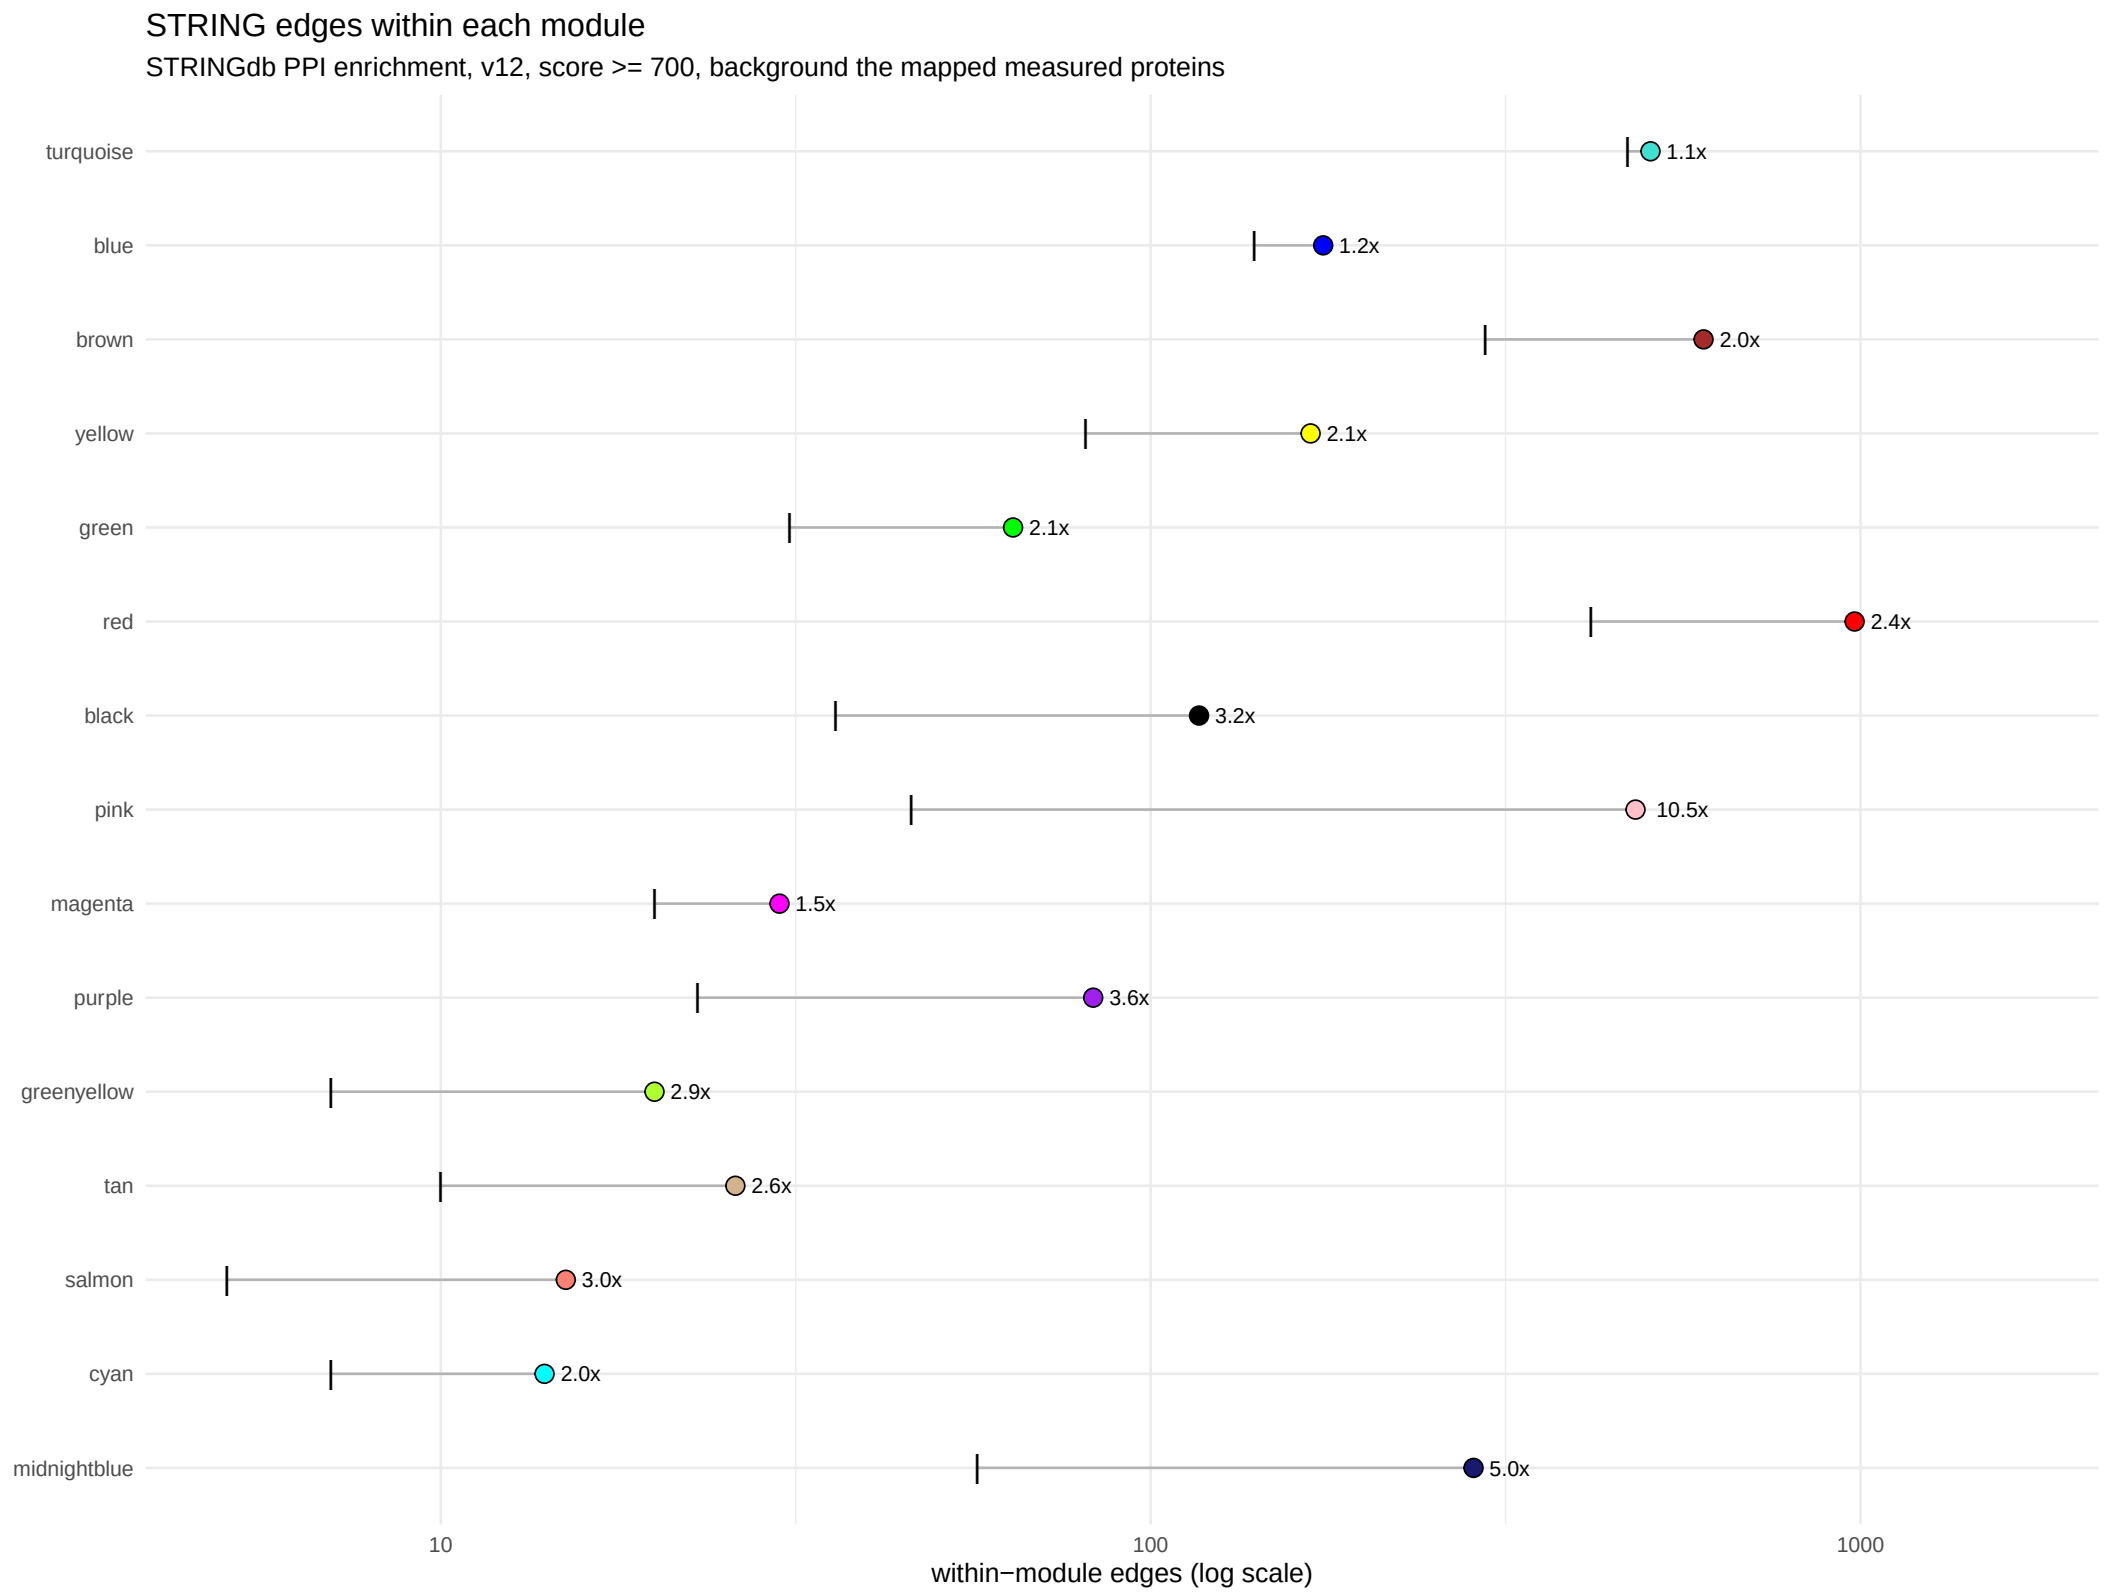


enrichplot::dotplot of the compareCluster result. Columns: modules, members carrying a set in brackets. Size is gene ratio, colour BH within module; modules with no set at BH < 0.05


STRING edges within each module
STRINGdb PPI enrichment, v12, score >= 700, background the mapped measured proteins
turquoise
blue
brown
yellow
green
red
black
pink
magenta
purple
greenyellow
tan
salmon
cyan
midnightblue
1.1x
1.2x
2.0x
2.1x
2.1x
2.4x
3.2x
10.5x
1.5x
3.6x
2.9x
2.6x
3.0x
2.0x
5.0x
10
100
1000
within−module edges (log scale)
Point: observed high−confidence edges among a module's members. Tick: edges STRINGdb expects from the members' degrees in the background. Label: observed over expected. Table: c_data/05_characterise.xlsx, string.

Module hub networks

top 25 members by kME per module, STRING v12 edges at score >= 700; page 1 of 4


turquoise: 12 edges among 25 hubs, 12 without an edge

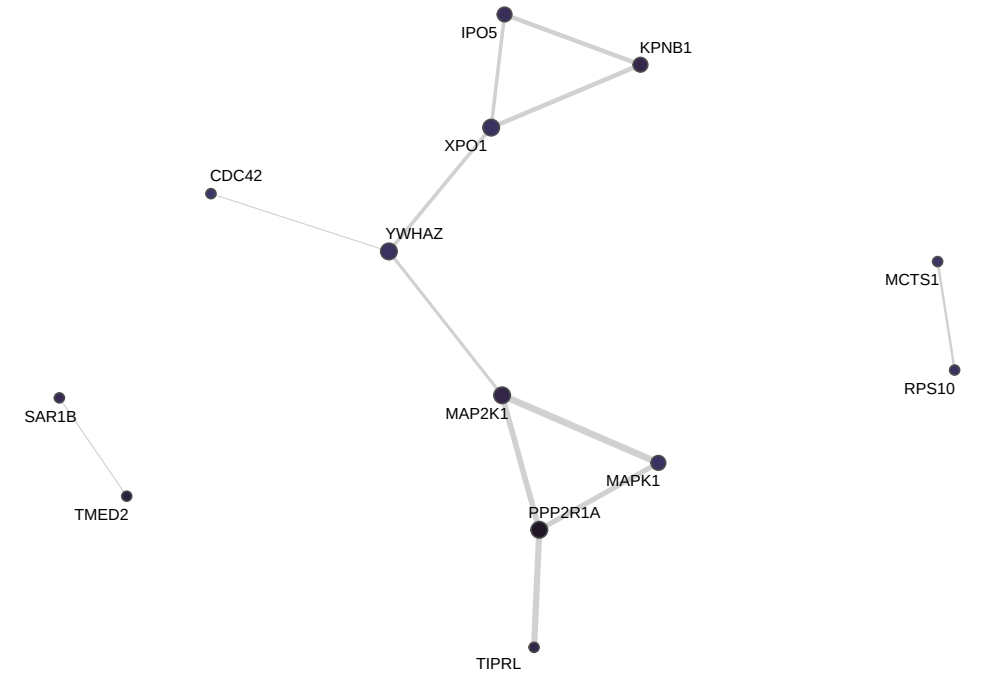


blue: 1 edges among 25 hubs, 23 without an edge




brown: 29 edges among 25 hubs, 10 without an edge

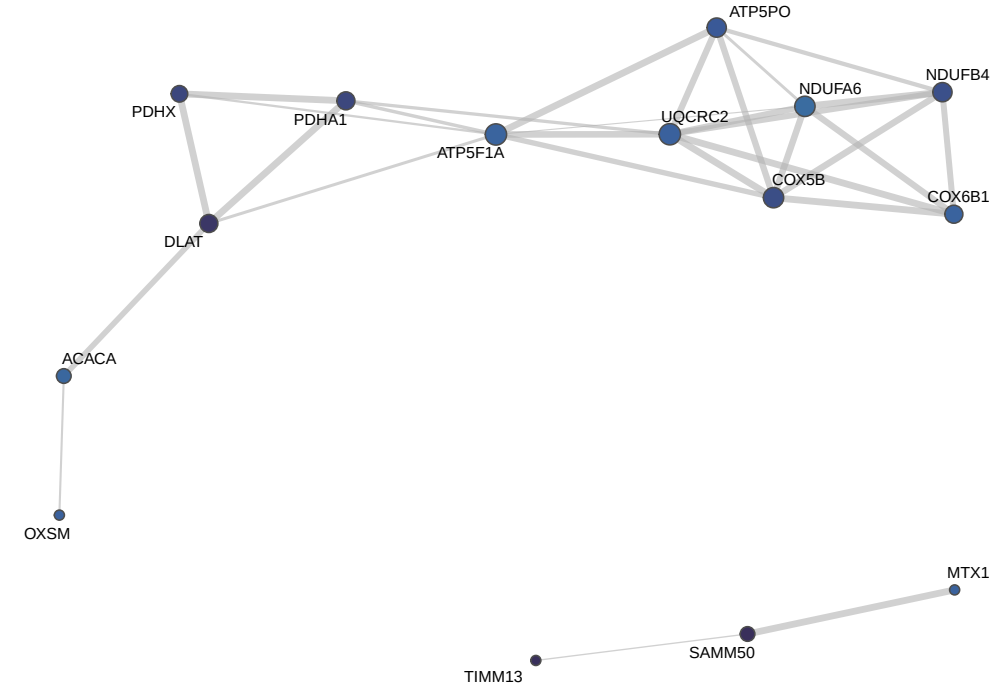

yellow: 2 edges among 25 hubs, 21 without an edge

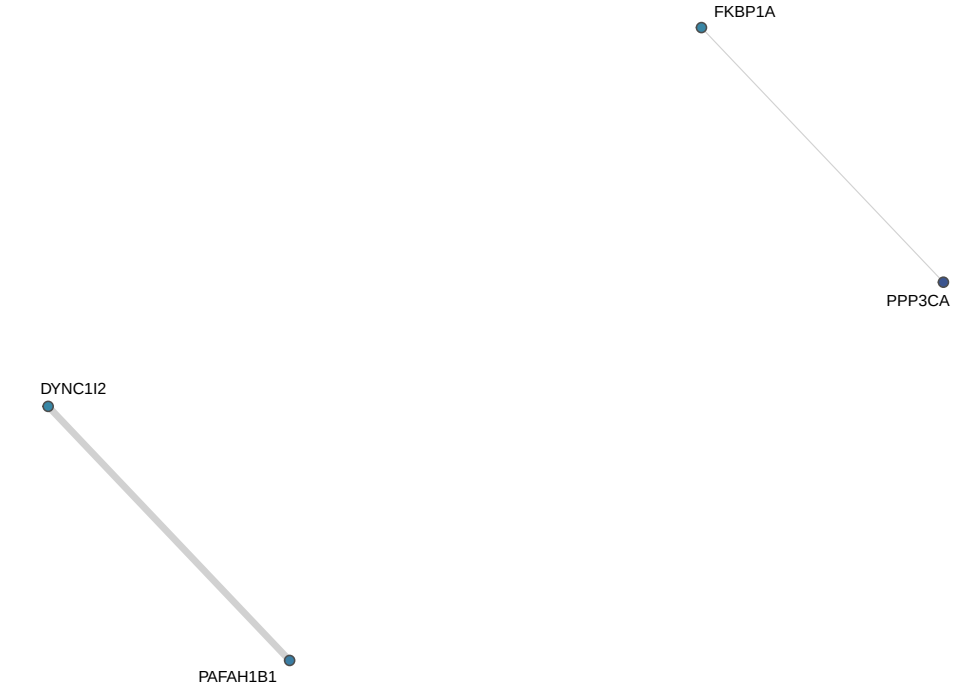



Nodes: a module's highest−kME members with at least one edge among them, fill = kME, size = degree among the drawn hubs; the title counts those without an edge. Edges: STRING combined score, width = score. Layout is force−directed and seeded; its geometry carries no meaning. Table: c_data/05_characterise.xlsx, hub_edges.


Module hub networks

top 25 members by kME per module, STRING v12 edges at score >= 700; page 2 of 4

green: 1 edges among 25 hubs, 23 without an edge




red: 180 edges among 25 hubs, 2 without an edge

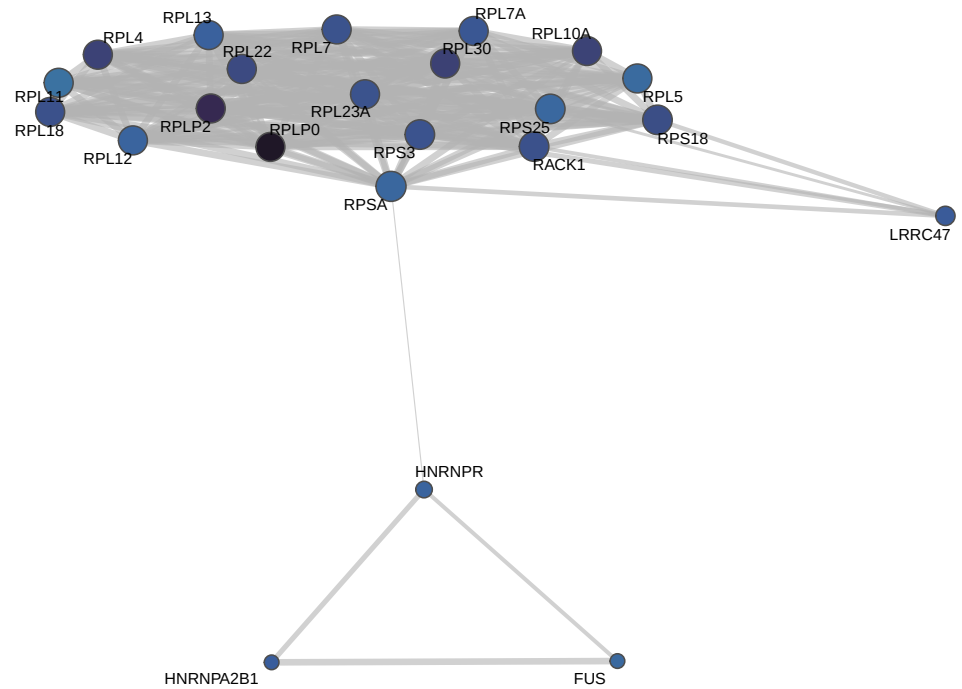


kME
1.0
0.9
0.8
0.7
0.6
0.5
0.4

degree
5
10
15
20

black: 14 edges among 25 hubs, 13 without an edge

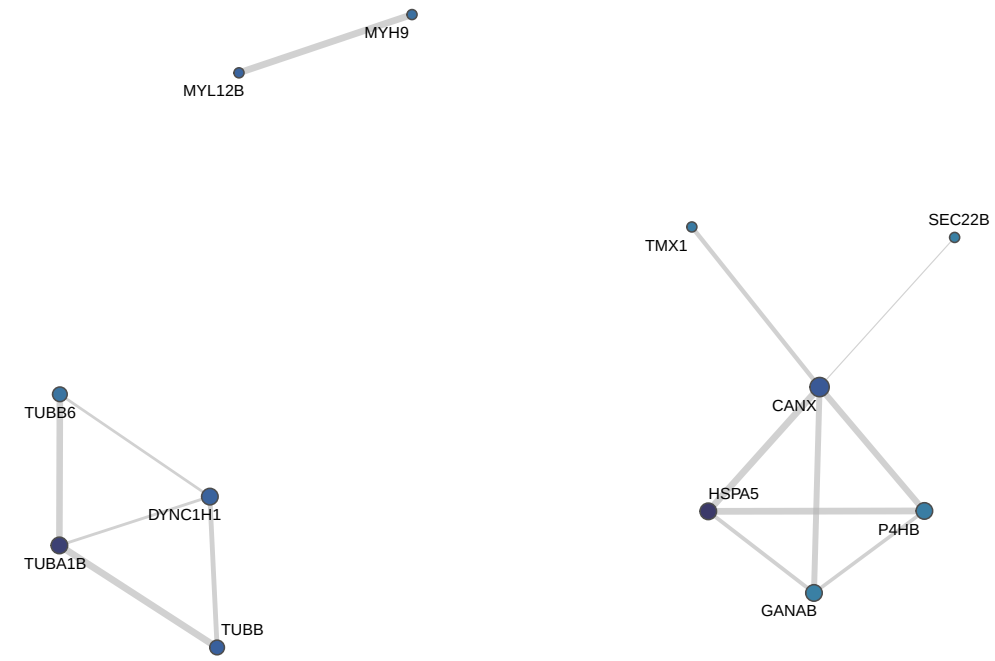

pink: 108 edges among 25 hubs, 2 without an edge

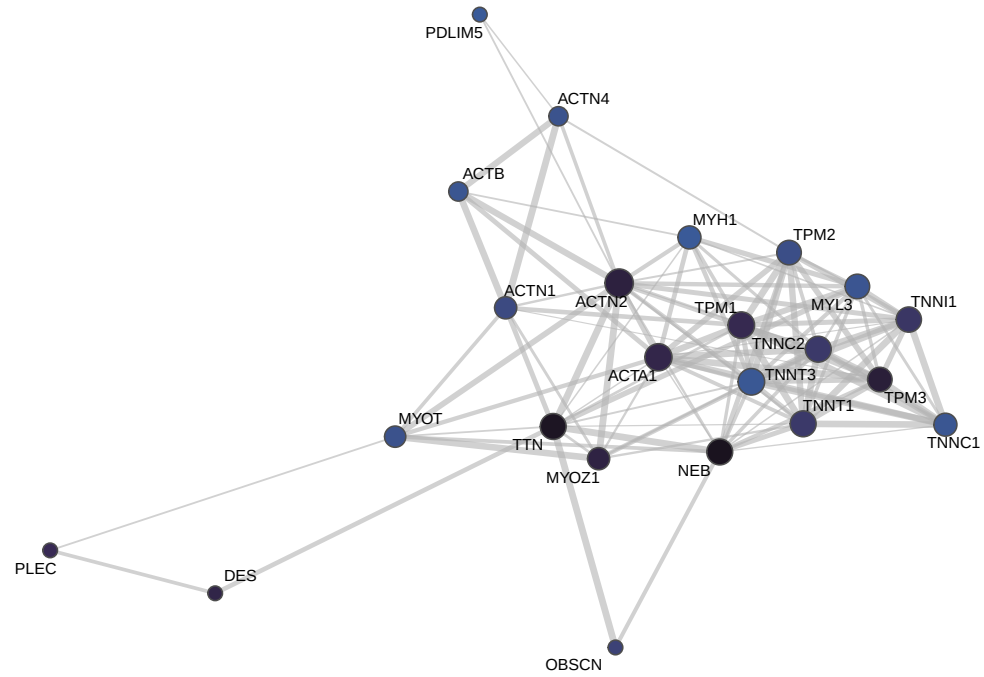


Nodes: a module's highest−kME members with at least one edge among them, fill = kME, size = degree among the drawn hubs; the title counts those without an edge. Edges: STRING combined score, width = score. Layout is force−directed and seeded; its geometry carries no meaning. Table: c_data/05_characterise.xlsx, hub_edges.


Module hub networks


top 25 members by kME per module, STRING v12 edges at score >= 700; page 3 of 4

magenta: 4 edges among 25 hubs, 18 without an edge

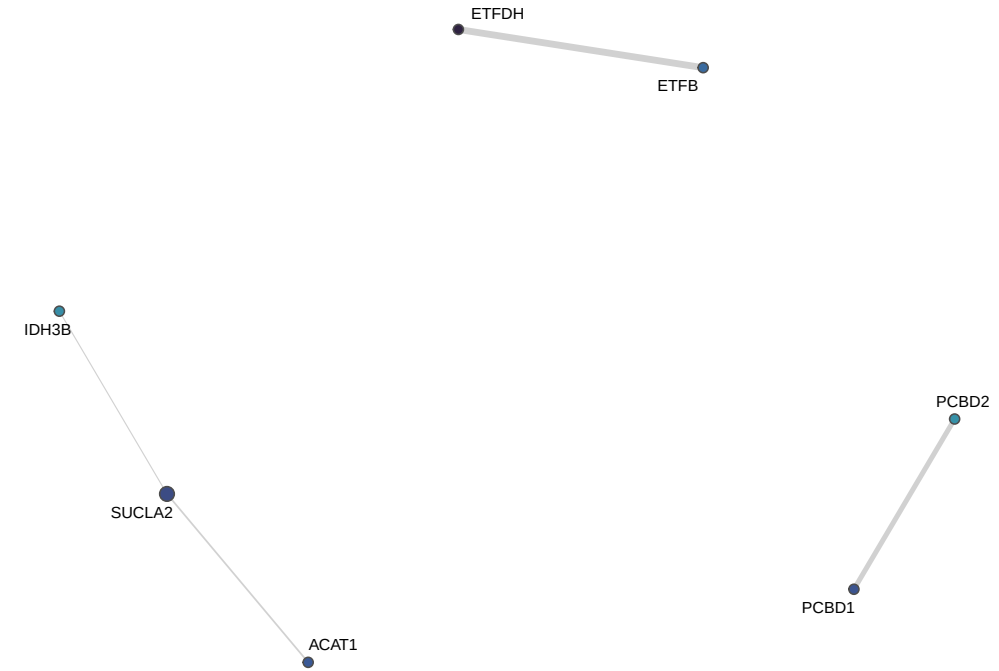


purple: 48 edges among 25 hubs, 7 without an edge

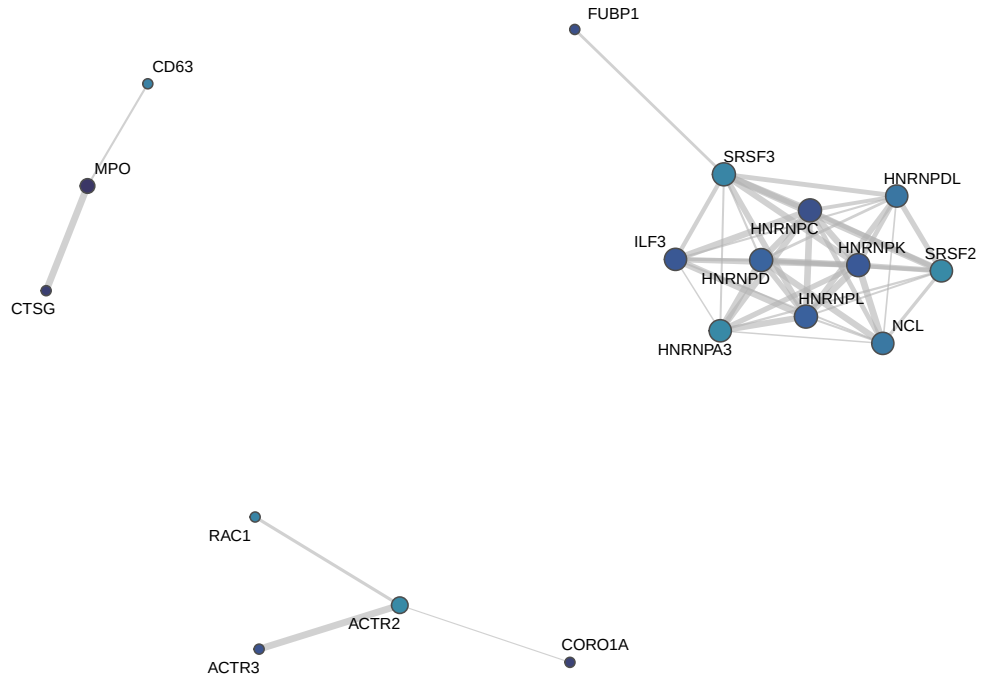




greenyellow: 8 edges among 25 hubs, 15 without an edge

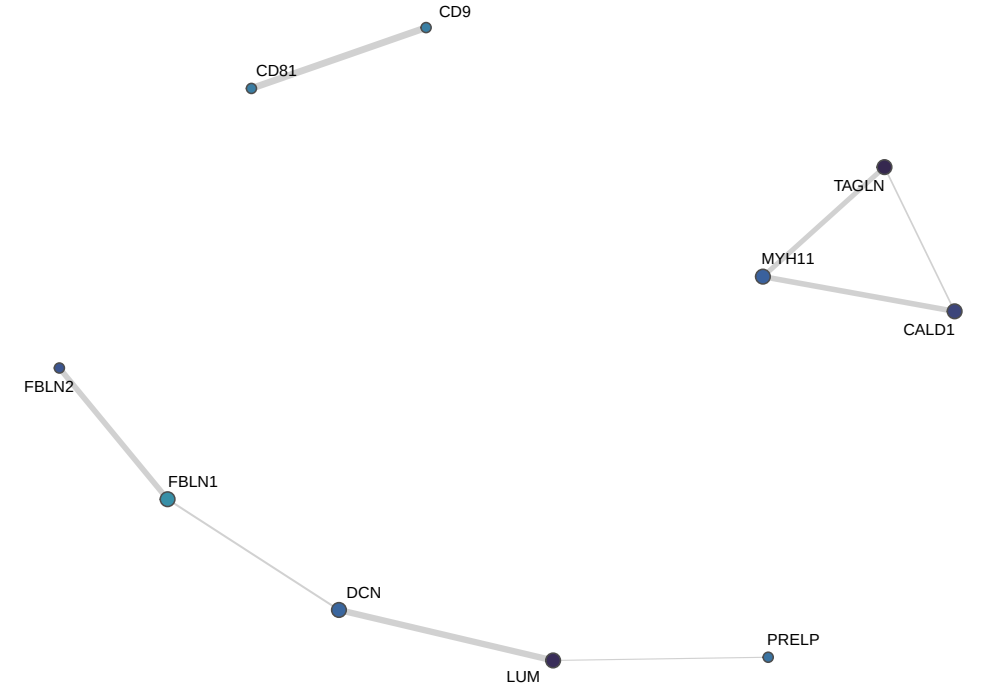

tan: 10 edges among 25 hubs, 13 without an edge

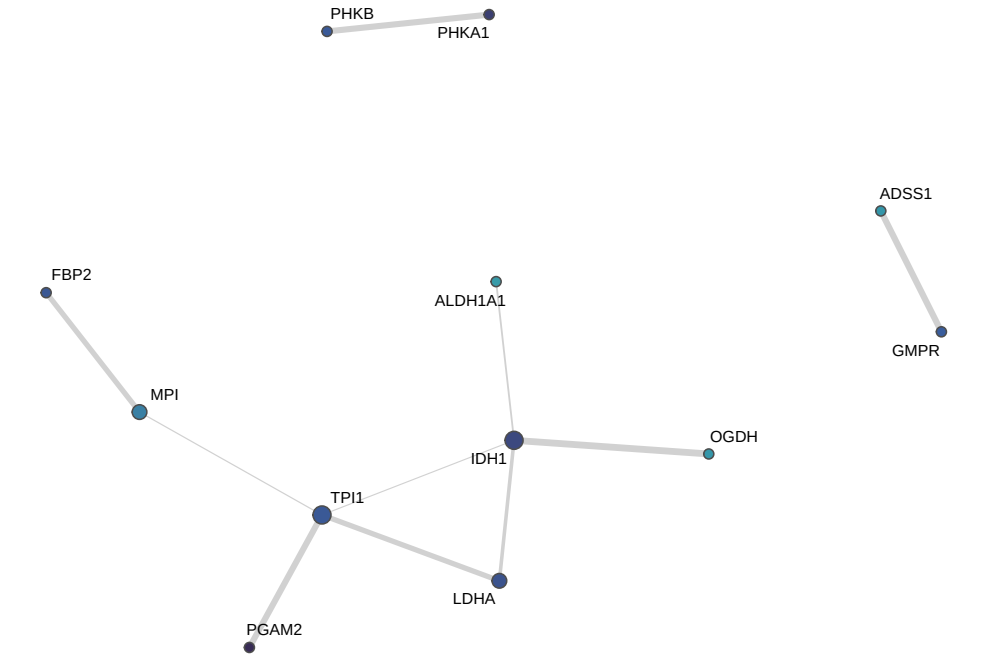


Nodes: a module's highest−kME members with at least one edge among them, fill = kME, size = degree among the drawn hubs; the title counts those without an edge. Edges: STRING combined score, width = score. Layout is force−directed and seeded; its geometry carries no meaning. Table: c_data/05_characterise.xlsx, hub_edges.

Module hub networks

top 25 members by kME per module, STRING v12 edges at score >= 700; page 4 of 4


salmon: 8 edges among 25 hubs, 12 without an edge

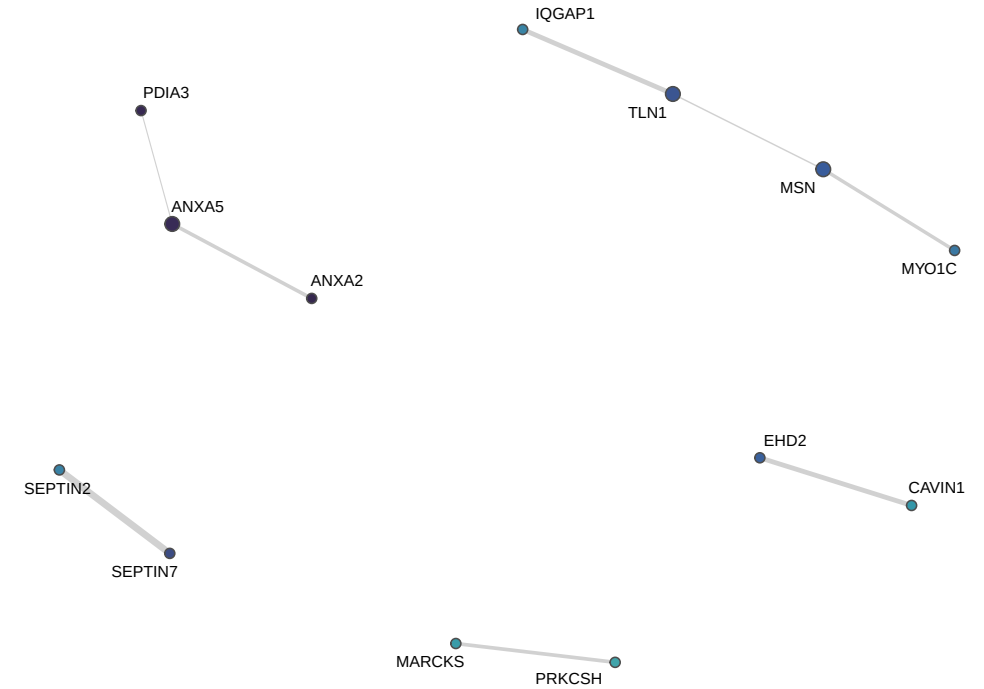


cyan: 7 edges among 25 hubs, 16 without an edge



midnightblue: 140 edges among 25 hubs, 4 without an edge

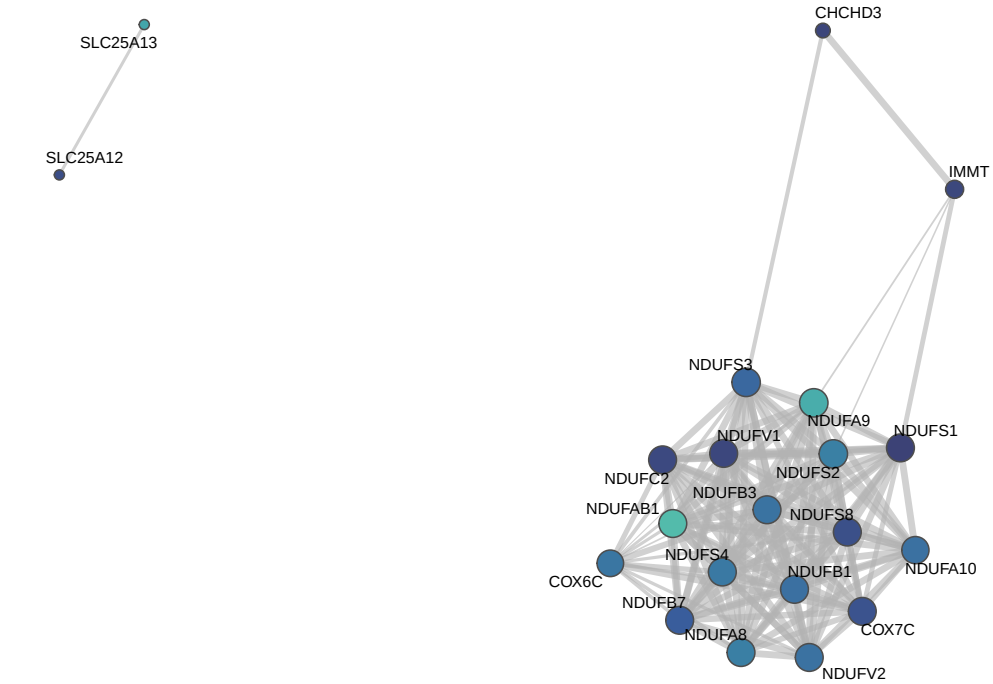



Nodes: a module's highest−kME members with at least one edge among them, fill = kME, size = degree among the drawn hubs; the title counts those without an edge. Edges: STRING combined score, width = score. Layout is force−directed and seeded; its geometry carries no meaning. Table: c_data/05_characterise.xlsx, hub_edges.