
Sample model overview: proteins




All 1,900 proteins, one row each. Moderated t of the within and between terms, abundance ~ timepoint + between + within, subject blocked. Colours stop at the 99th percentile of |t|, 2.9.
Rows are ordered by average−linkage clustering (1 − Pearson r) of limpa's matrix, for display only. Grey: not tested. Table: c_data/04_associate.xlsx, model.

Change score overview, training window: proteins

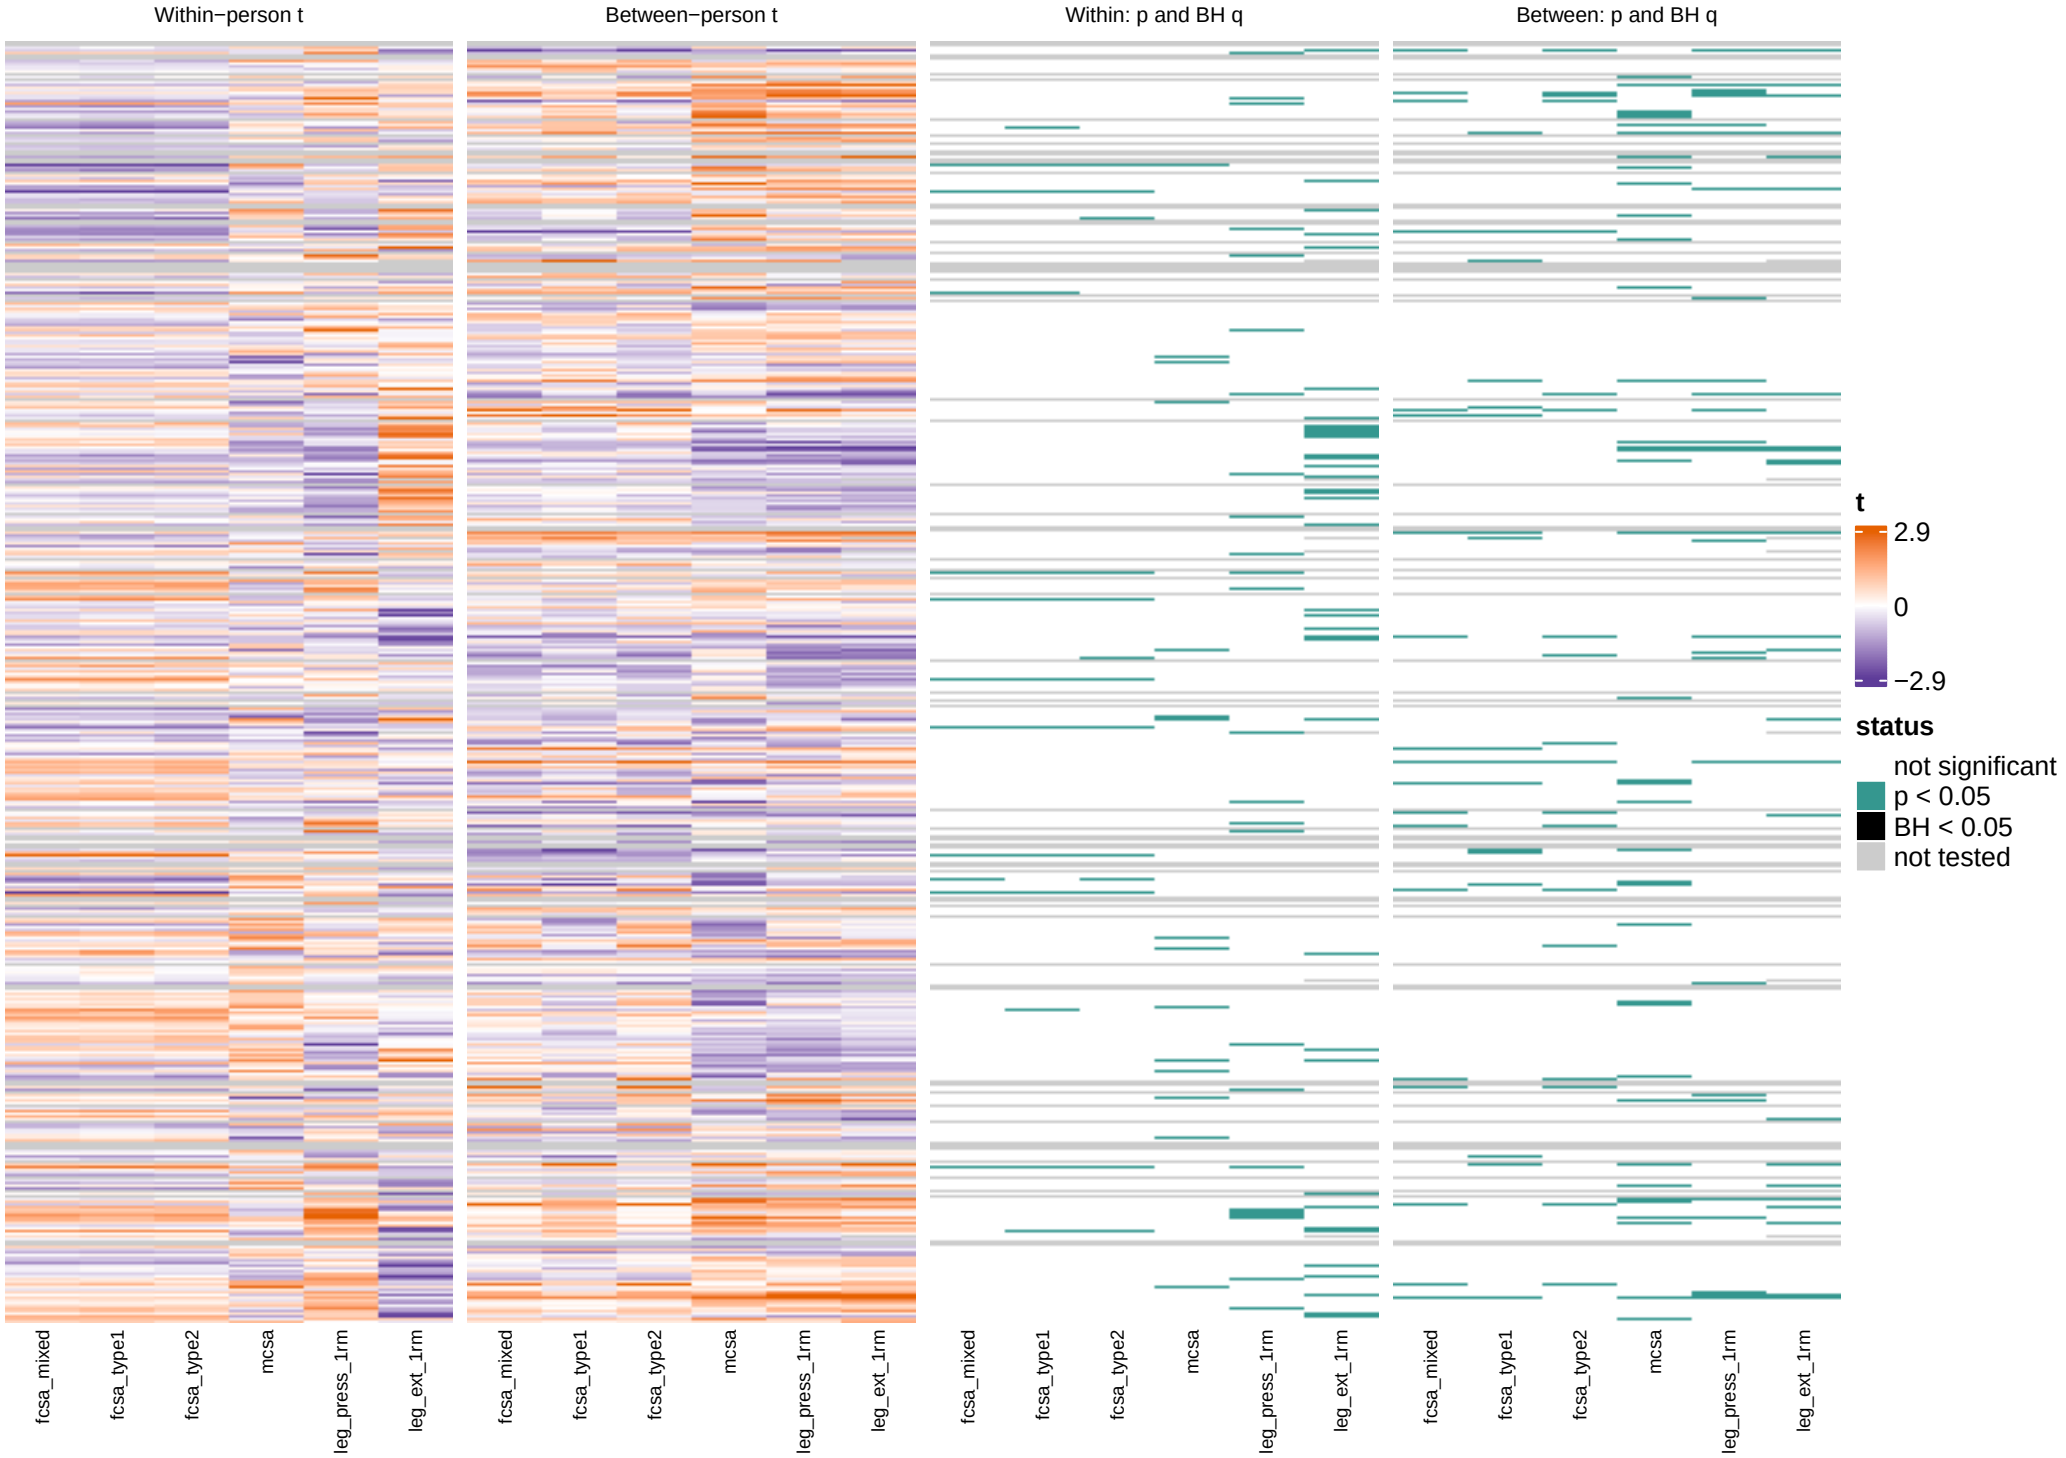


All 1,900 proteins, one row each. Spearman rho between the log2 abundance (change, T1 to T2) and each outcome. Rows are ordered by average−linkage clustering (1 − Pearson r) of limpa's matrix, for display only. Grey: not tested. Table: c_data/04_associate.xlsx, change_score.

Change score overview, baseline window: proteins

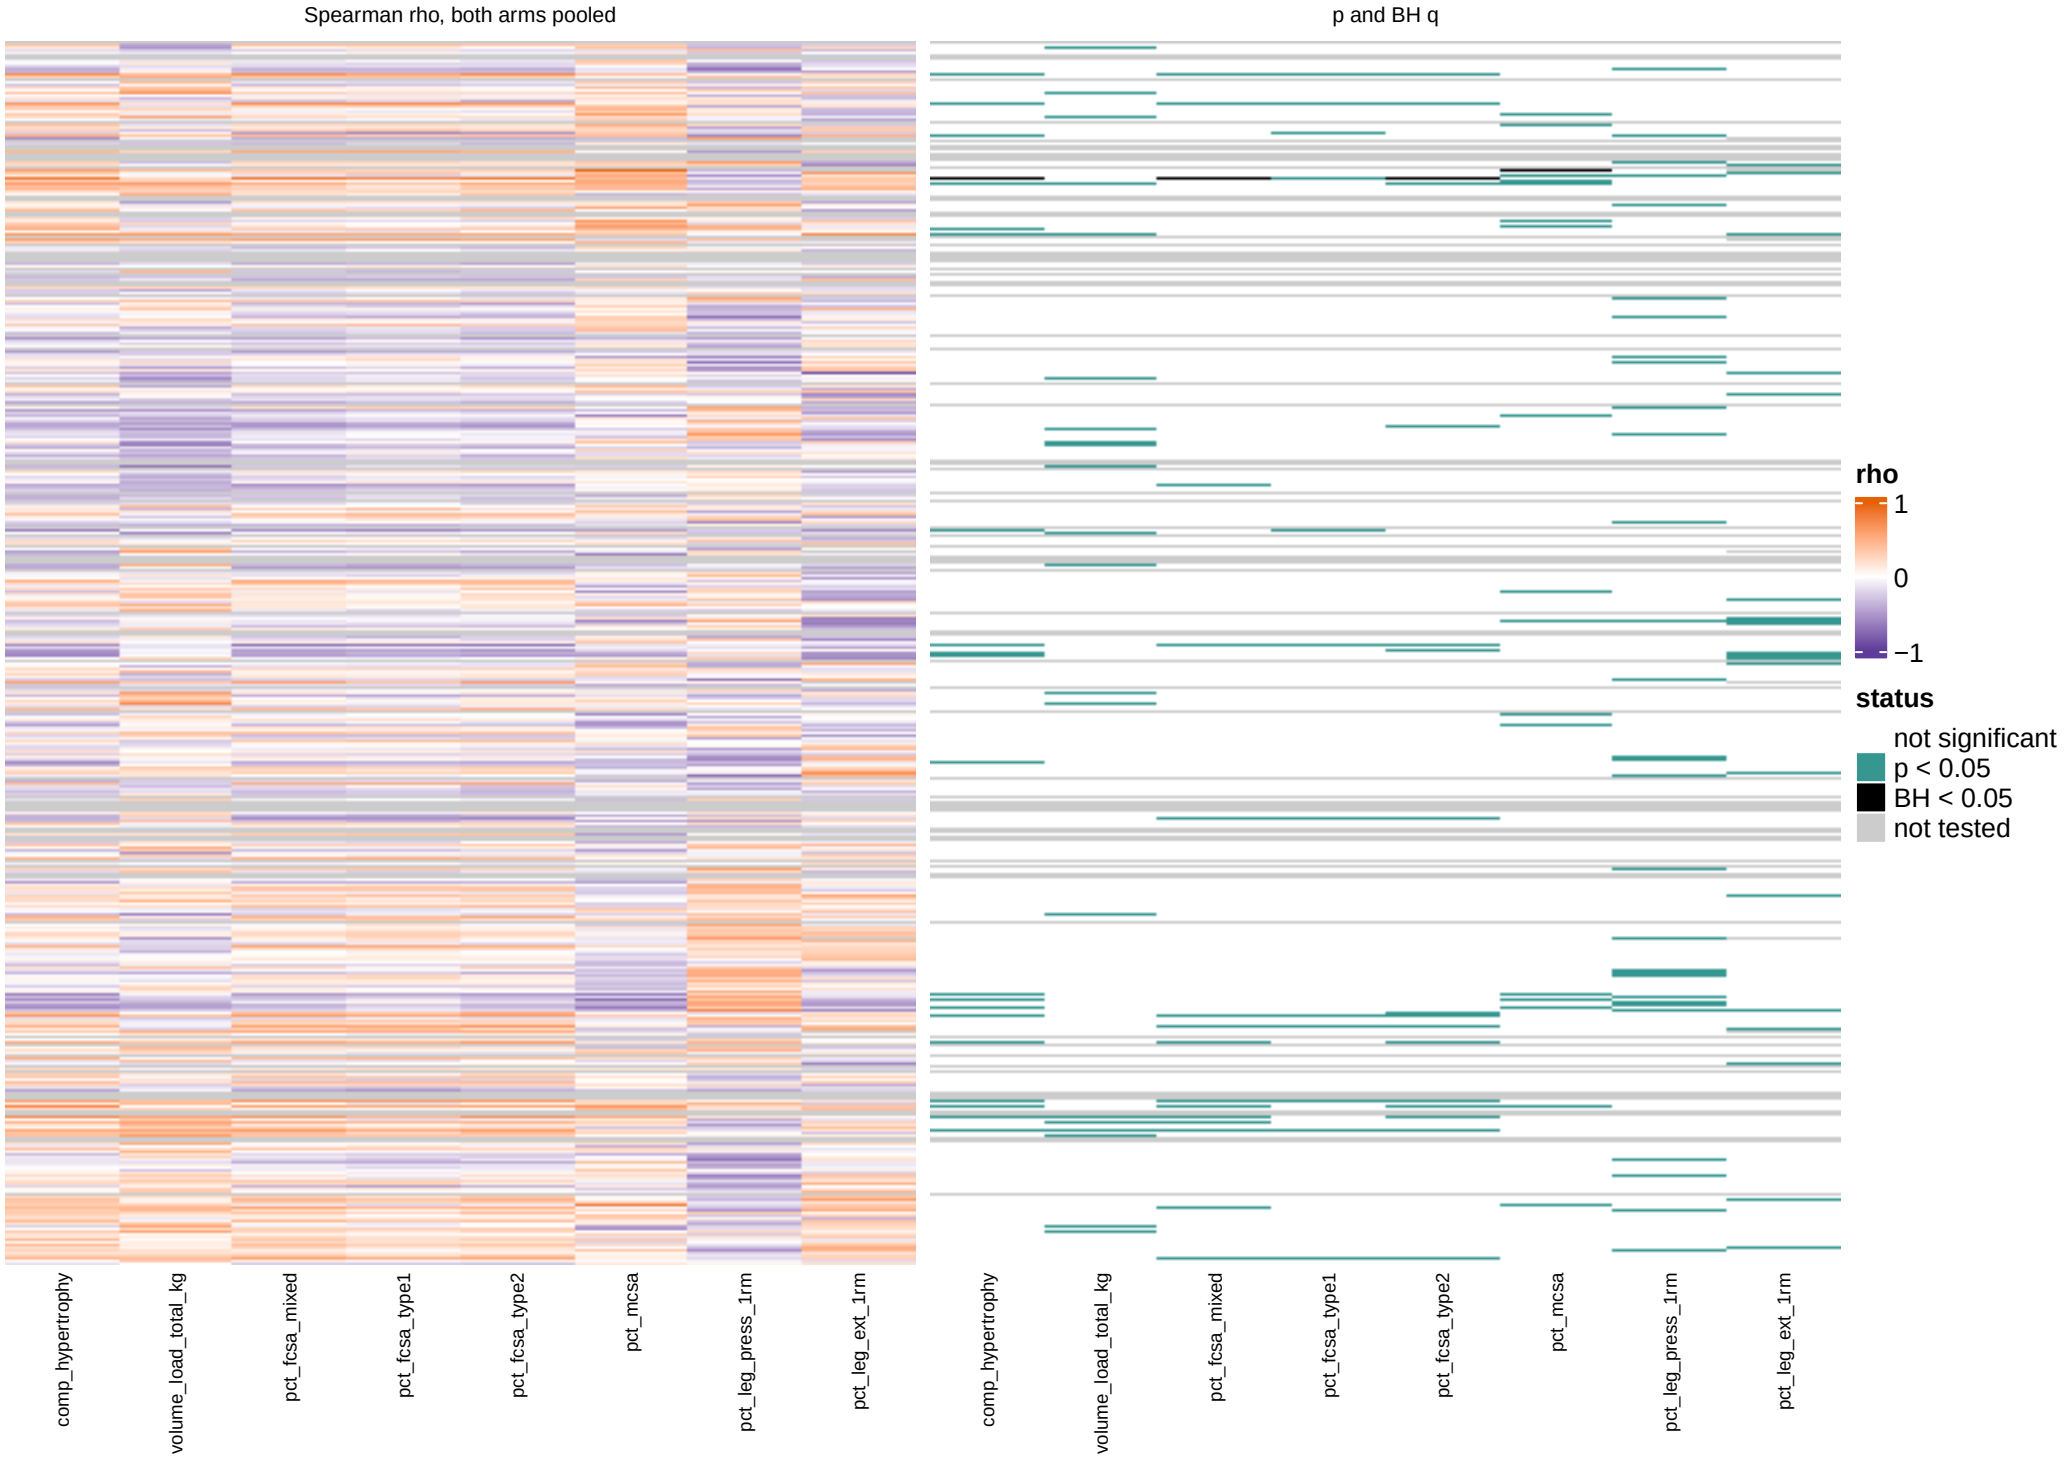

All 1,900 proteins, one row each. Spearman rho between the log2 abundance (T1 level) and each outcome. Rows are ordered by average−linkage clustering (1 − Pearson r) of limpa's matrix, for display only. Grey: not tested. Table: c_data/04_associate.xlsx, change_score.


Change score overview, acute window: proteins

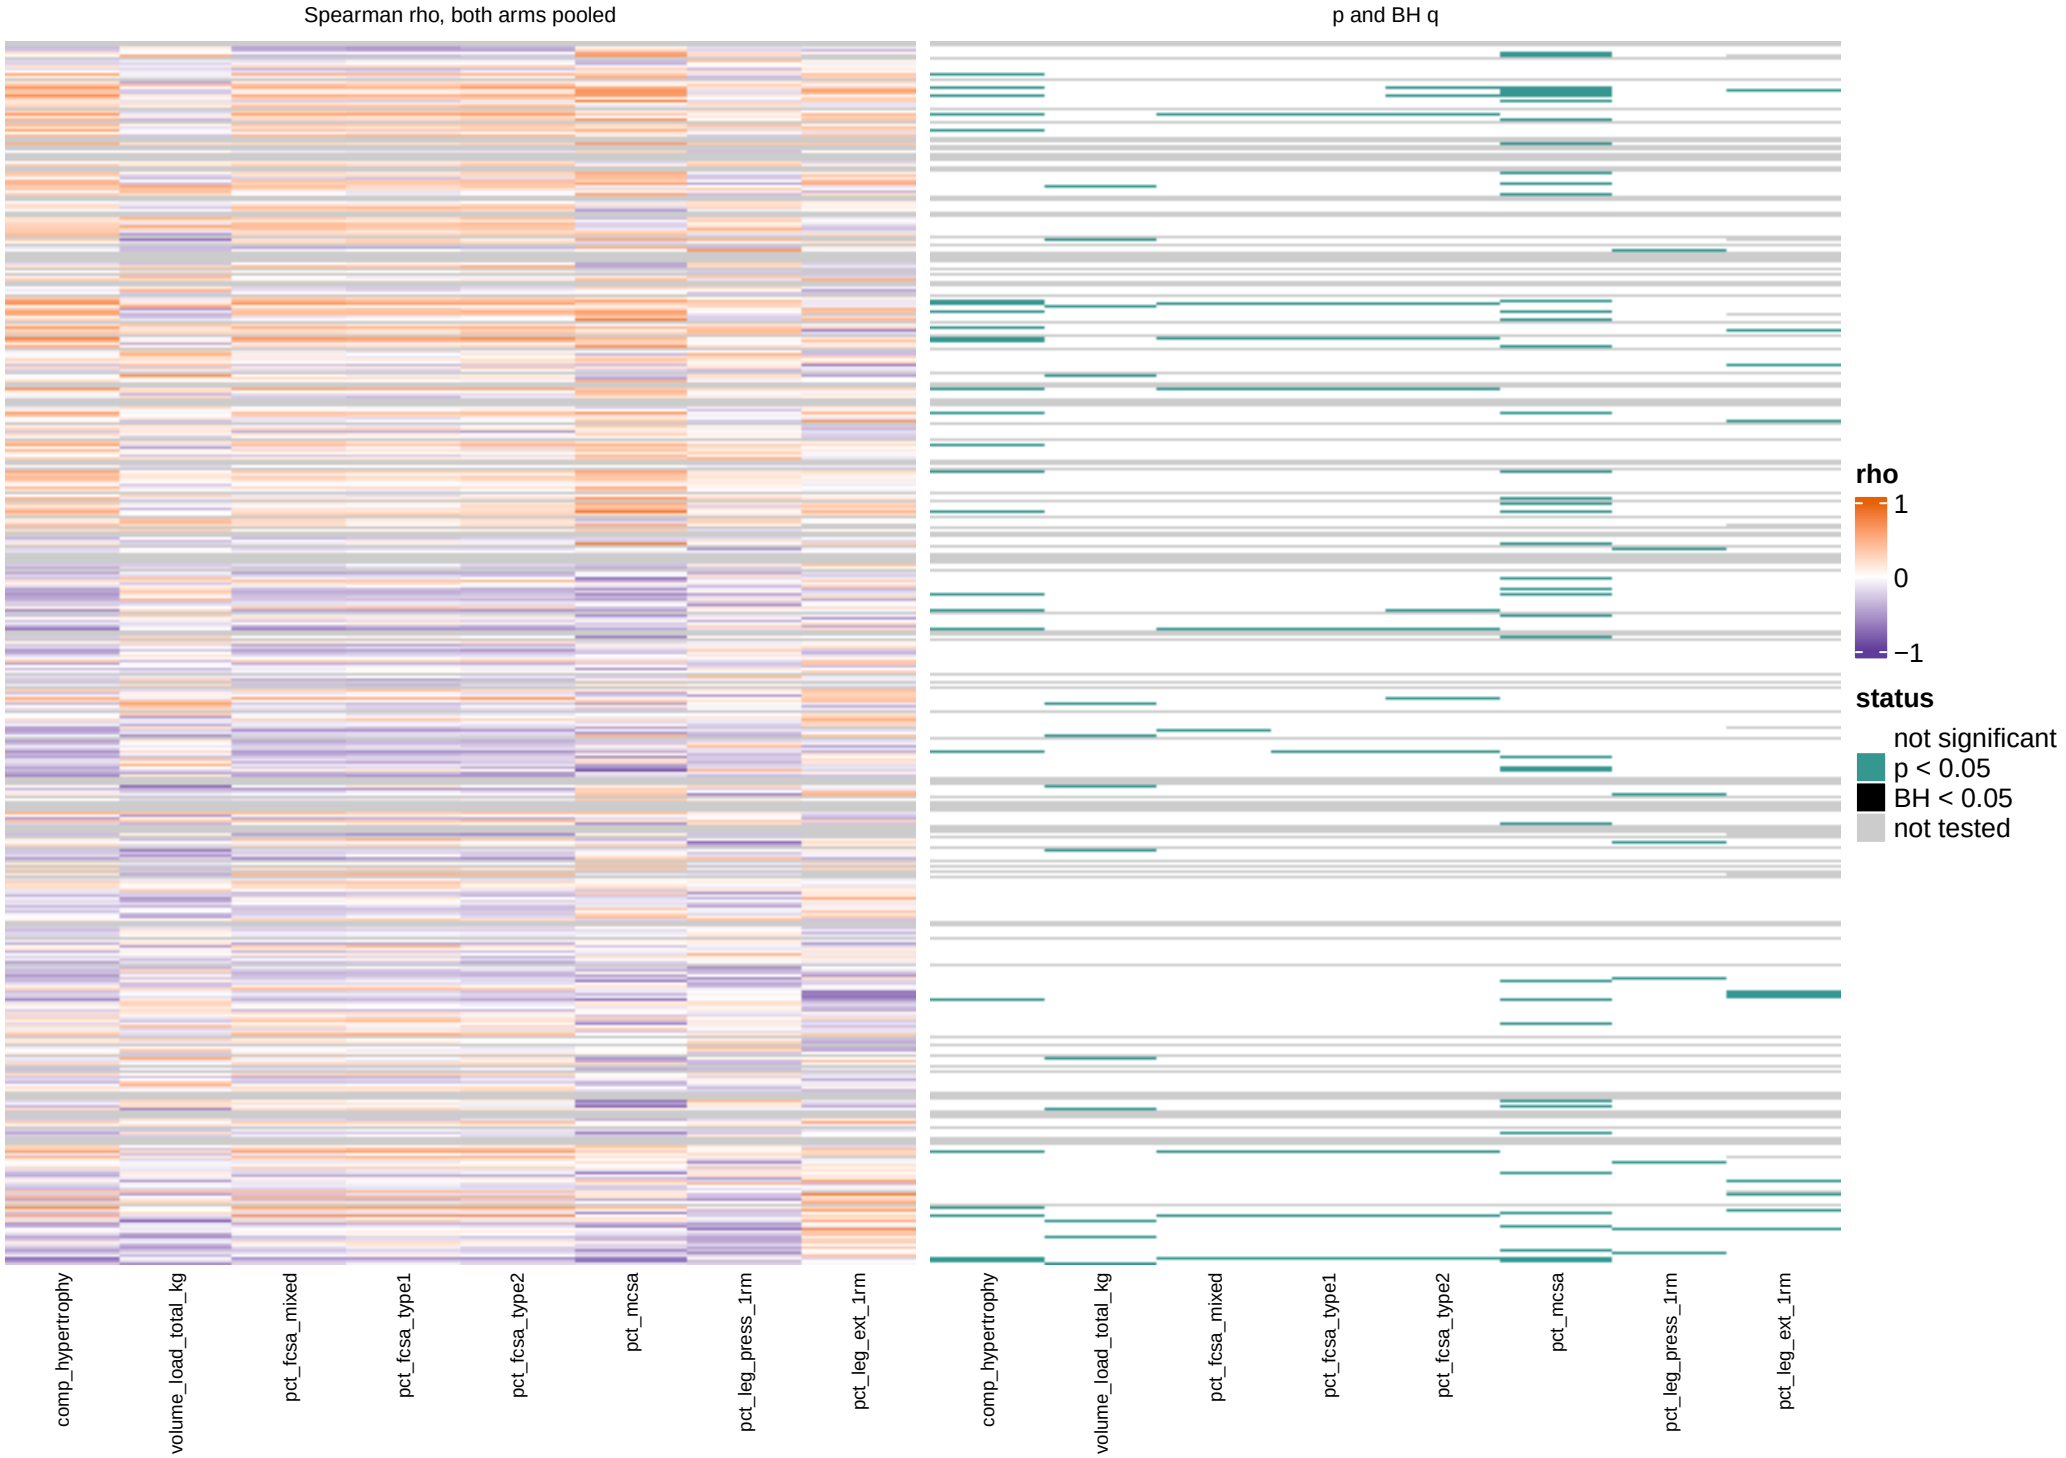

All 1,900 proteins, one row each. Spearman rho between the log2 abundance (change, T2 to T3) and each outcome. Rows are ordered by average−linkage clustering (1 − Pearson r) of limpa's matrix, for display only. Grey: not tested. Table: c_data/04_associate.xlsx, change_score.

fcsa_mixed, within−person term


62 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 1 of 6.

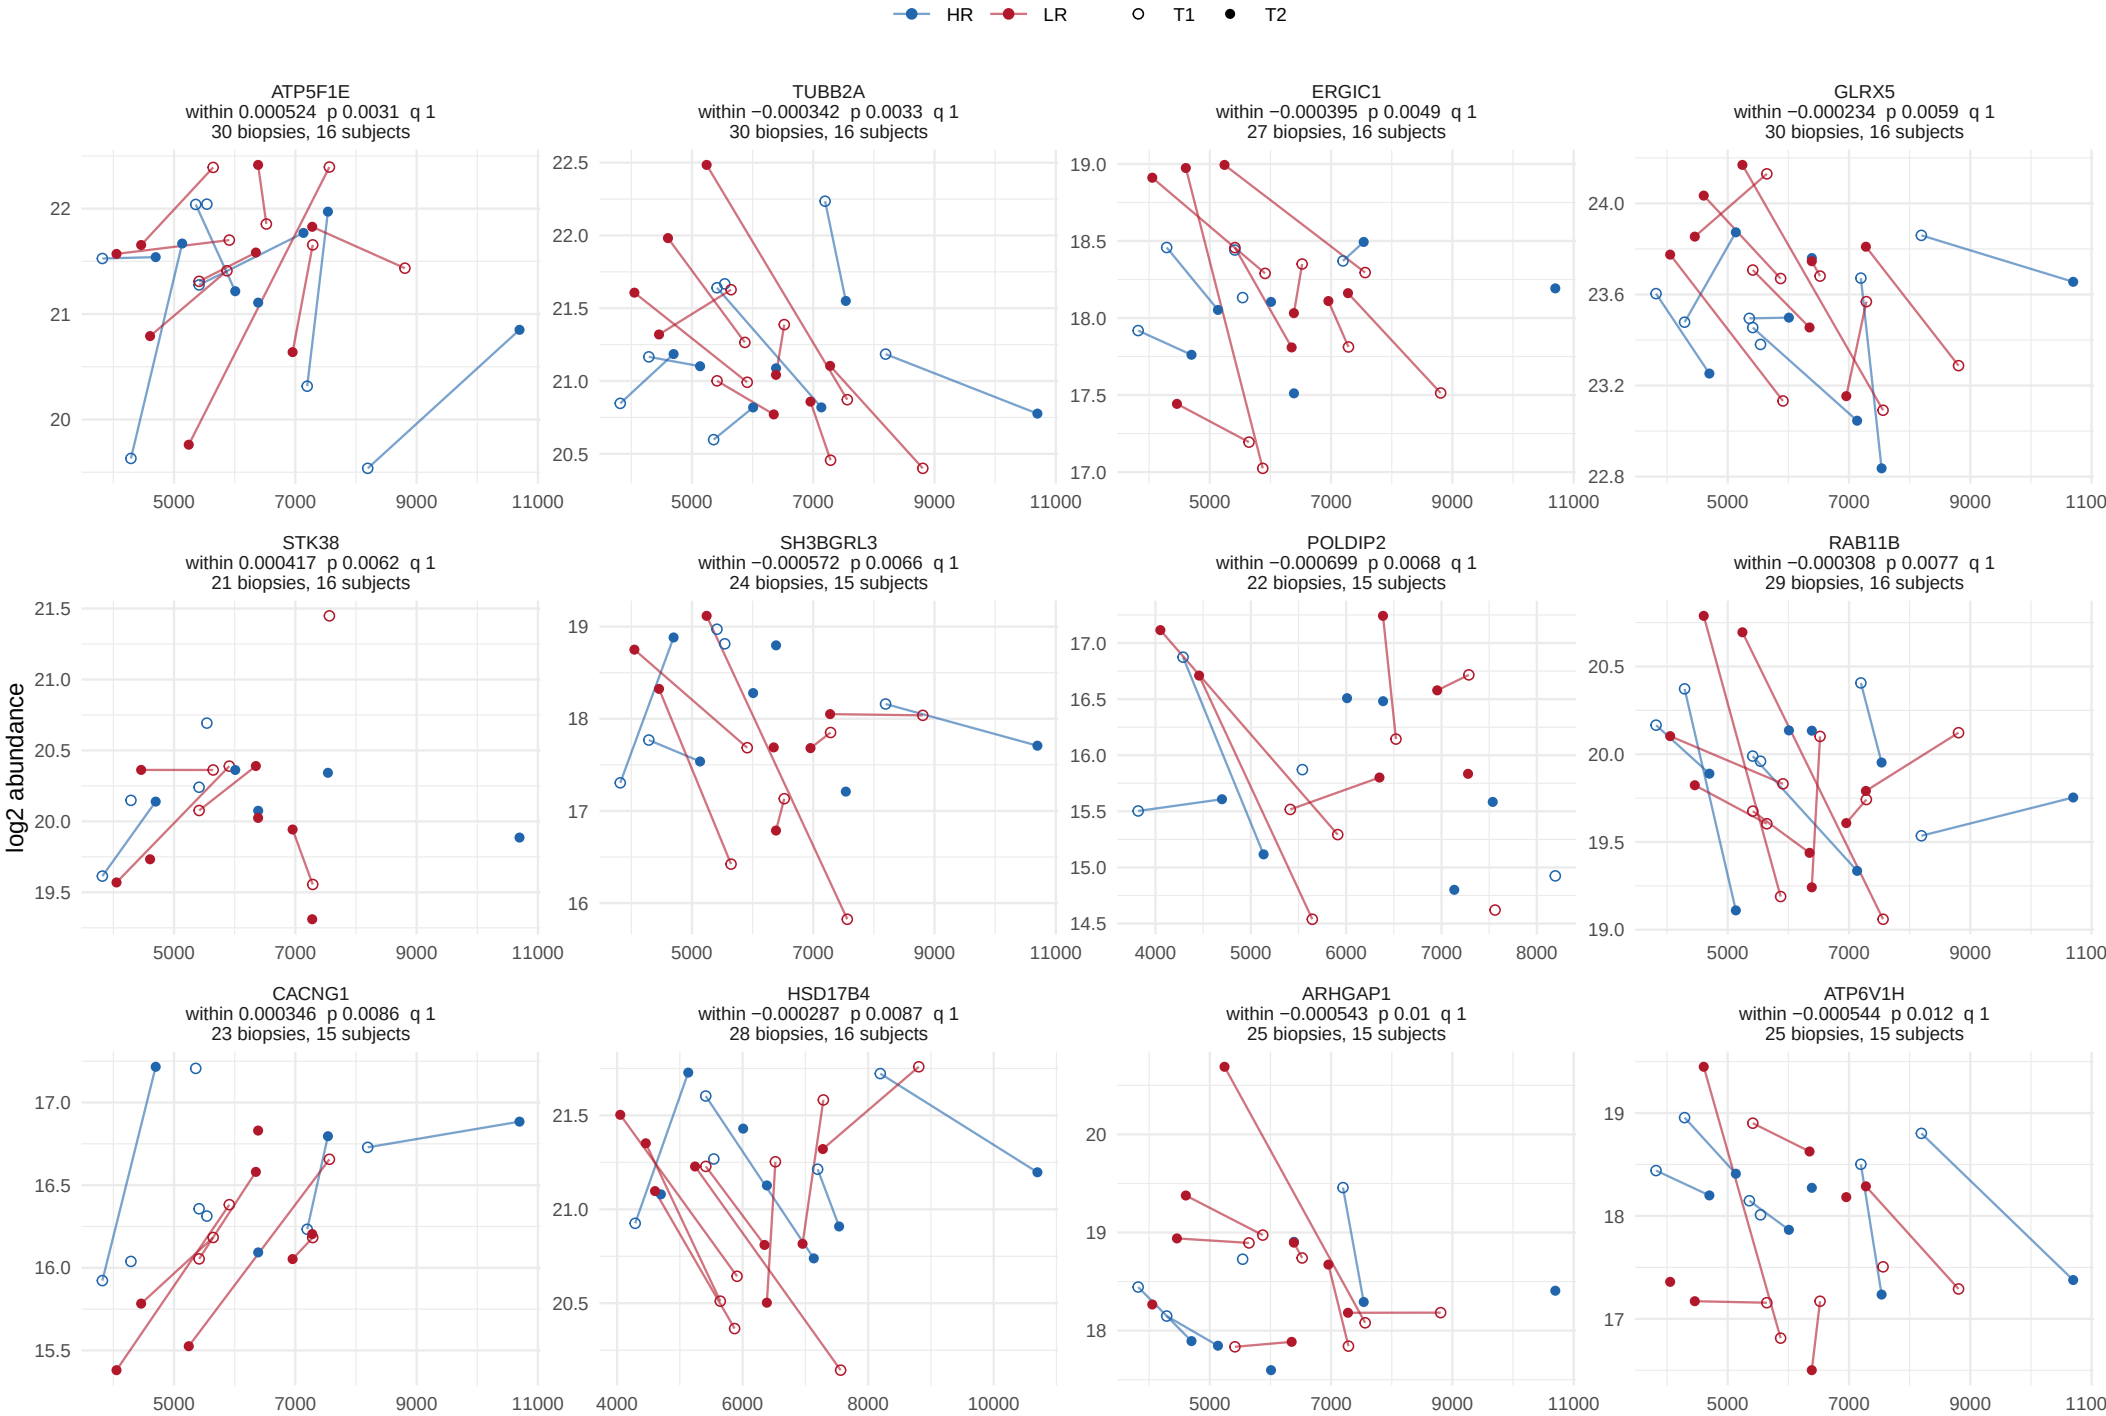

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_mixed, within−person term


62 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 2 of 6.

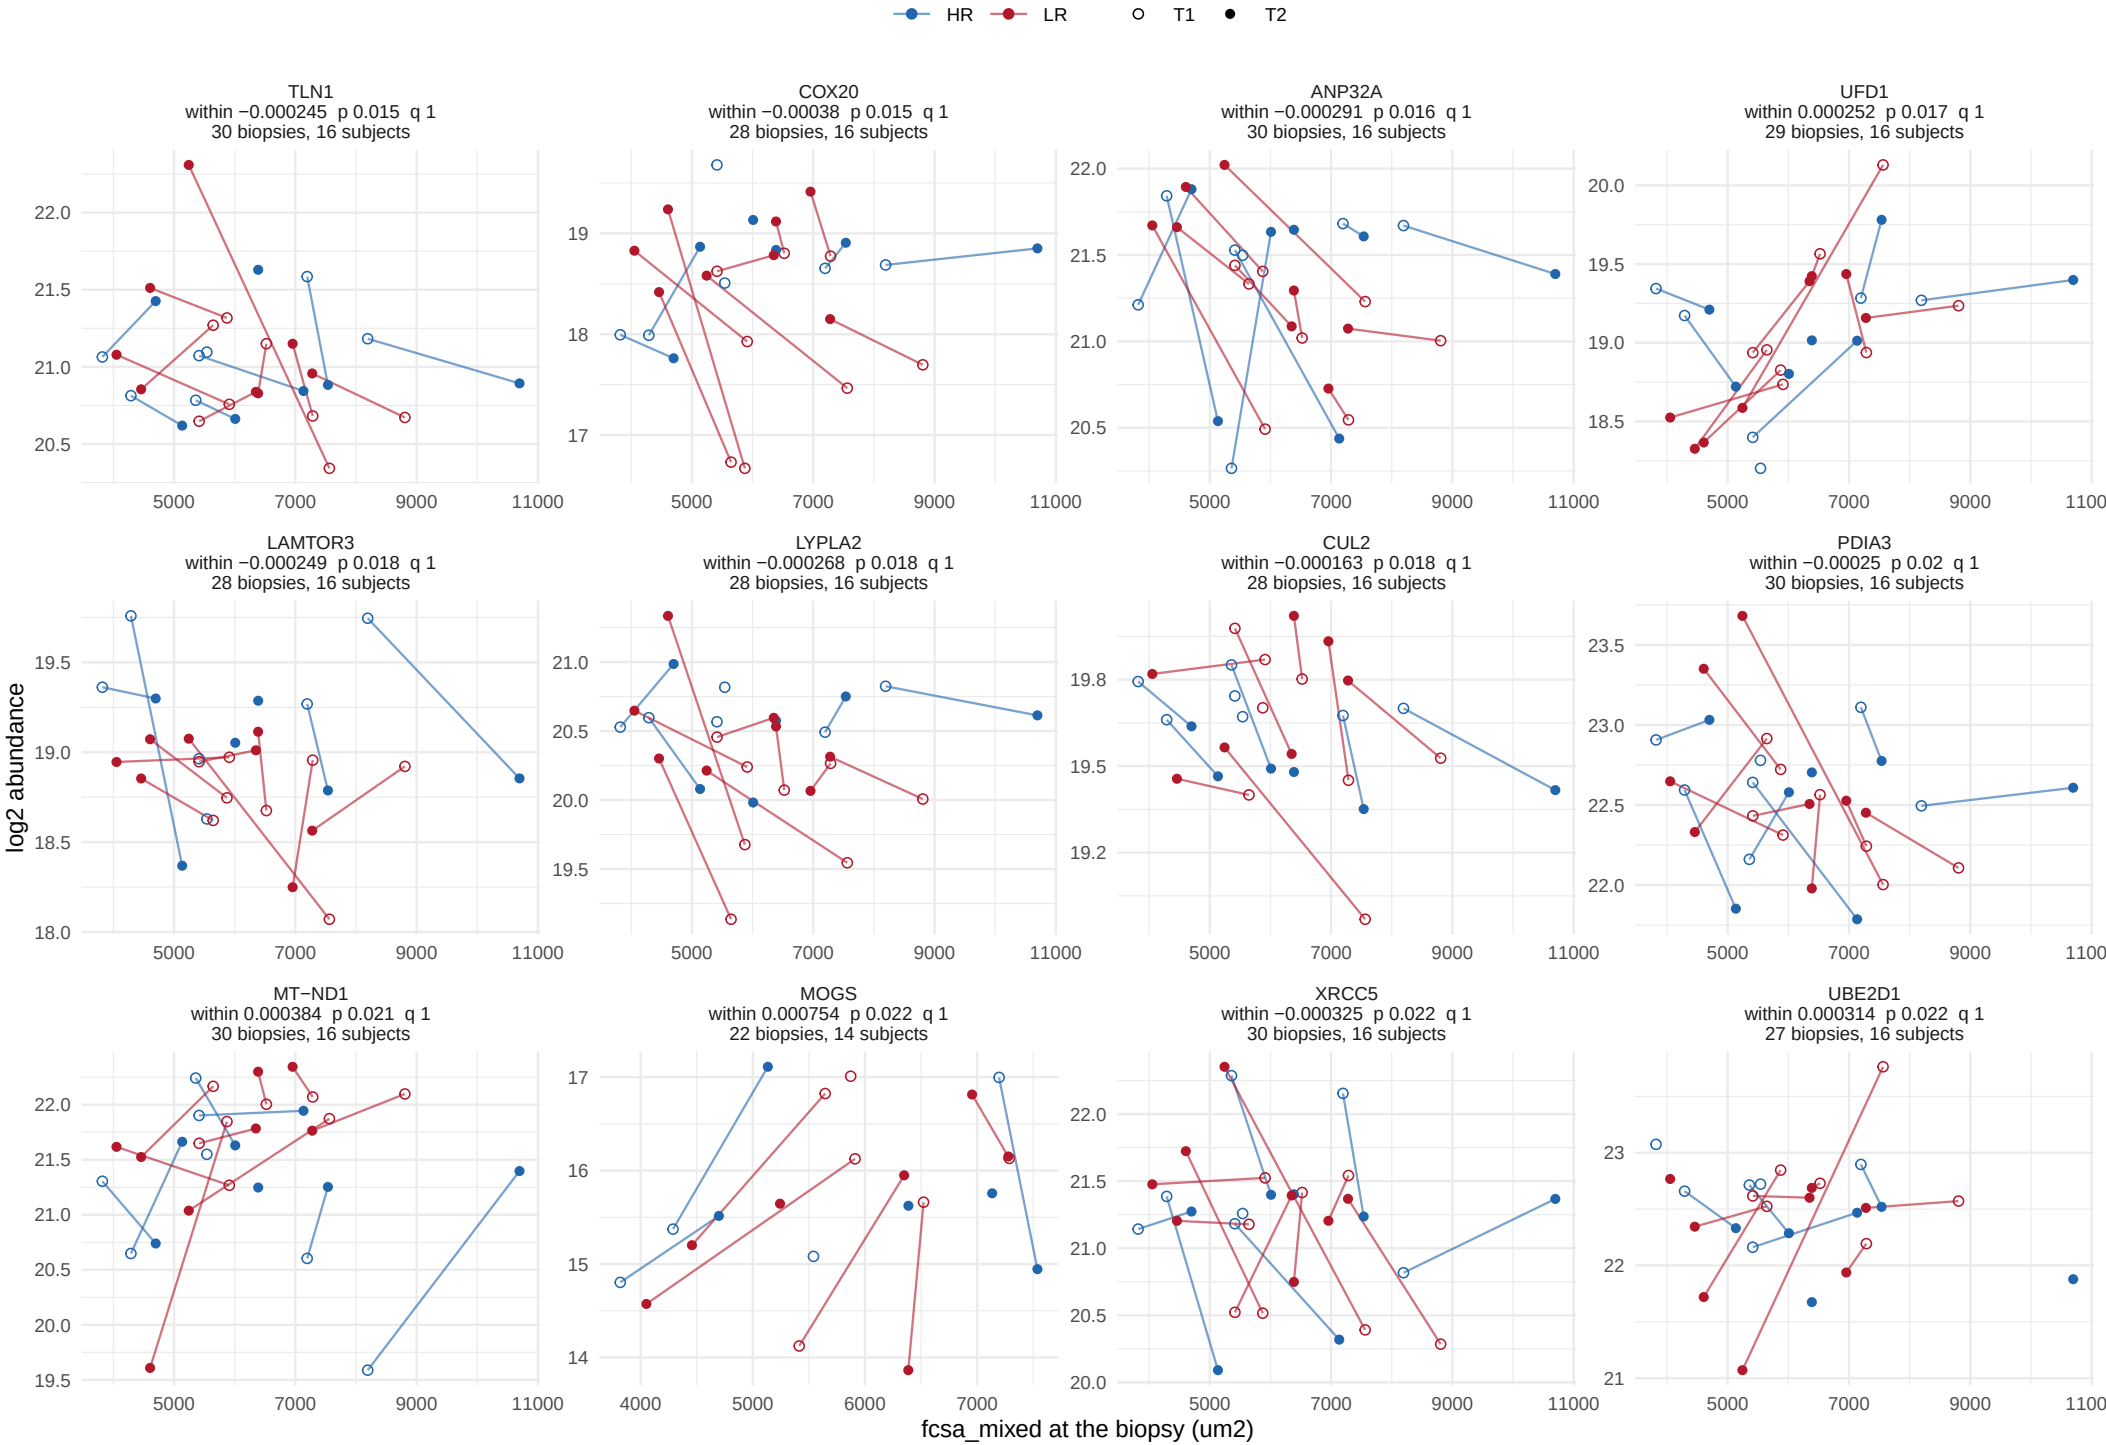

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_mixed, within−person term


62 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 3 of 6.

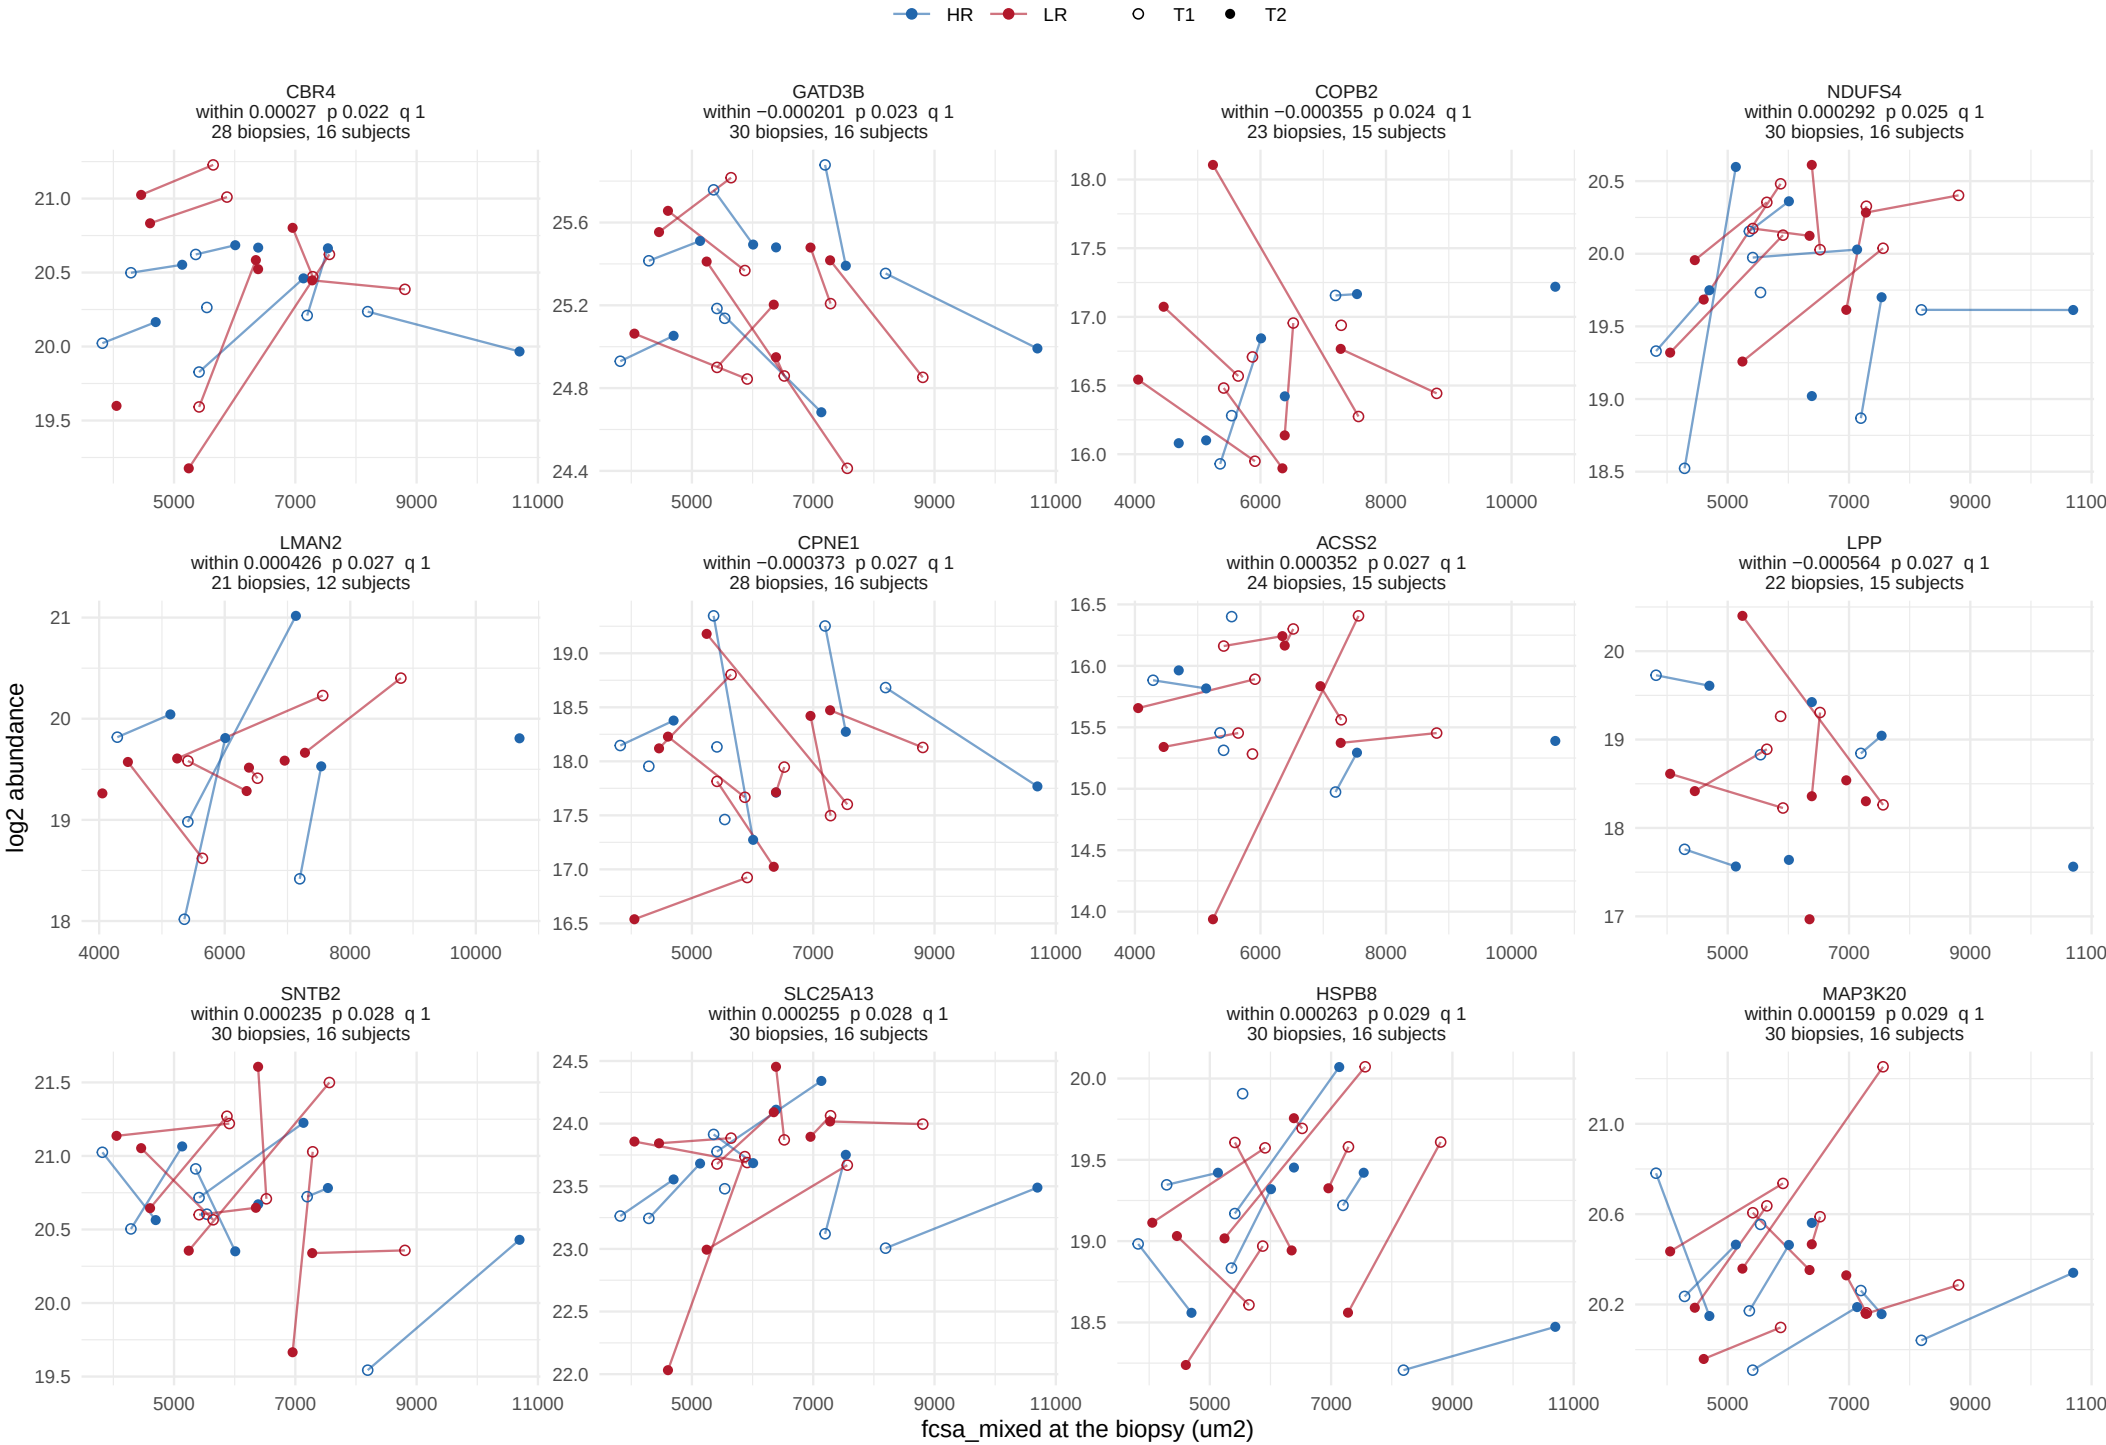

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_mixed, within−person term


62 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 4 of 6.

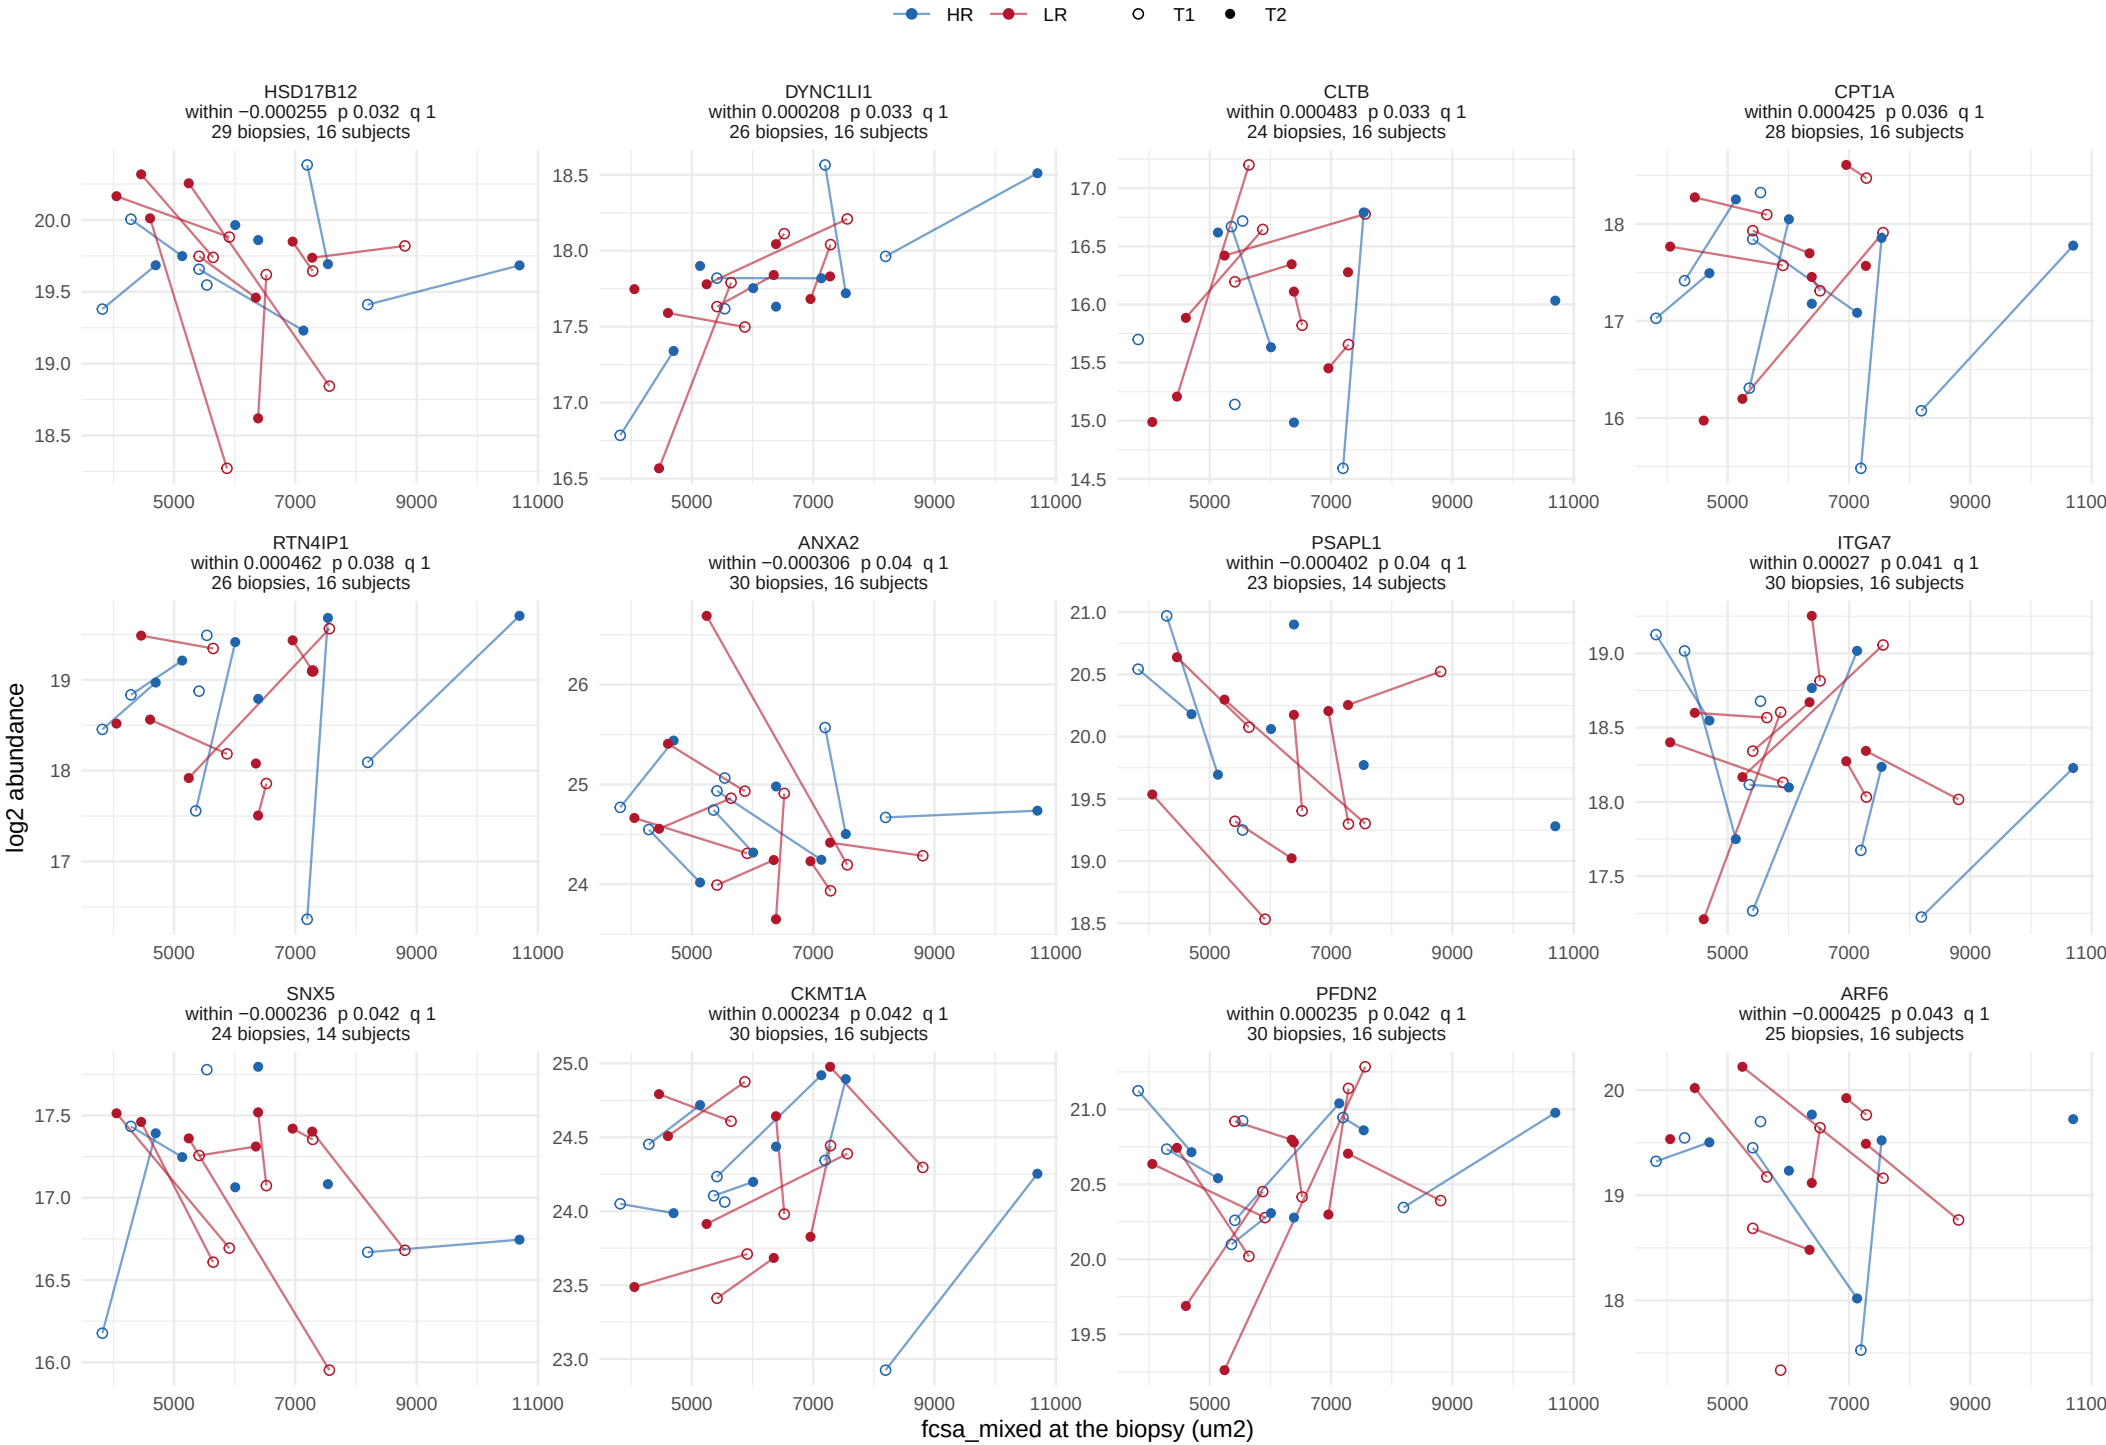

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_mixed, within−person term


62 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 5 of 6.

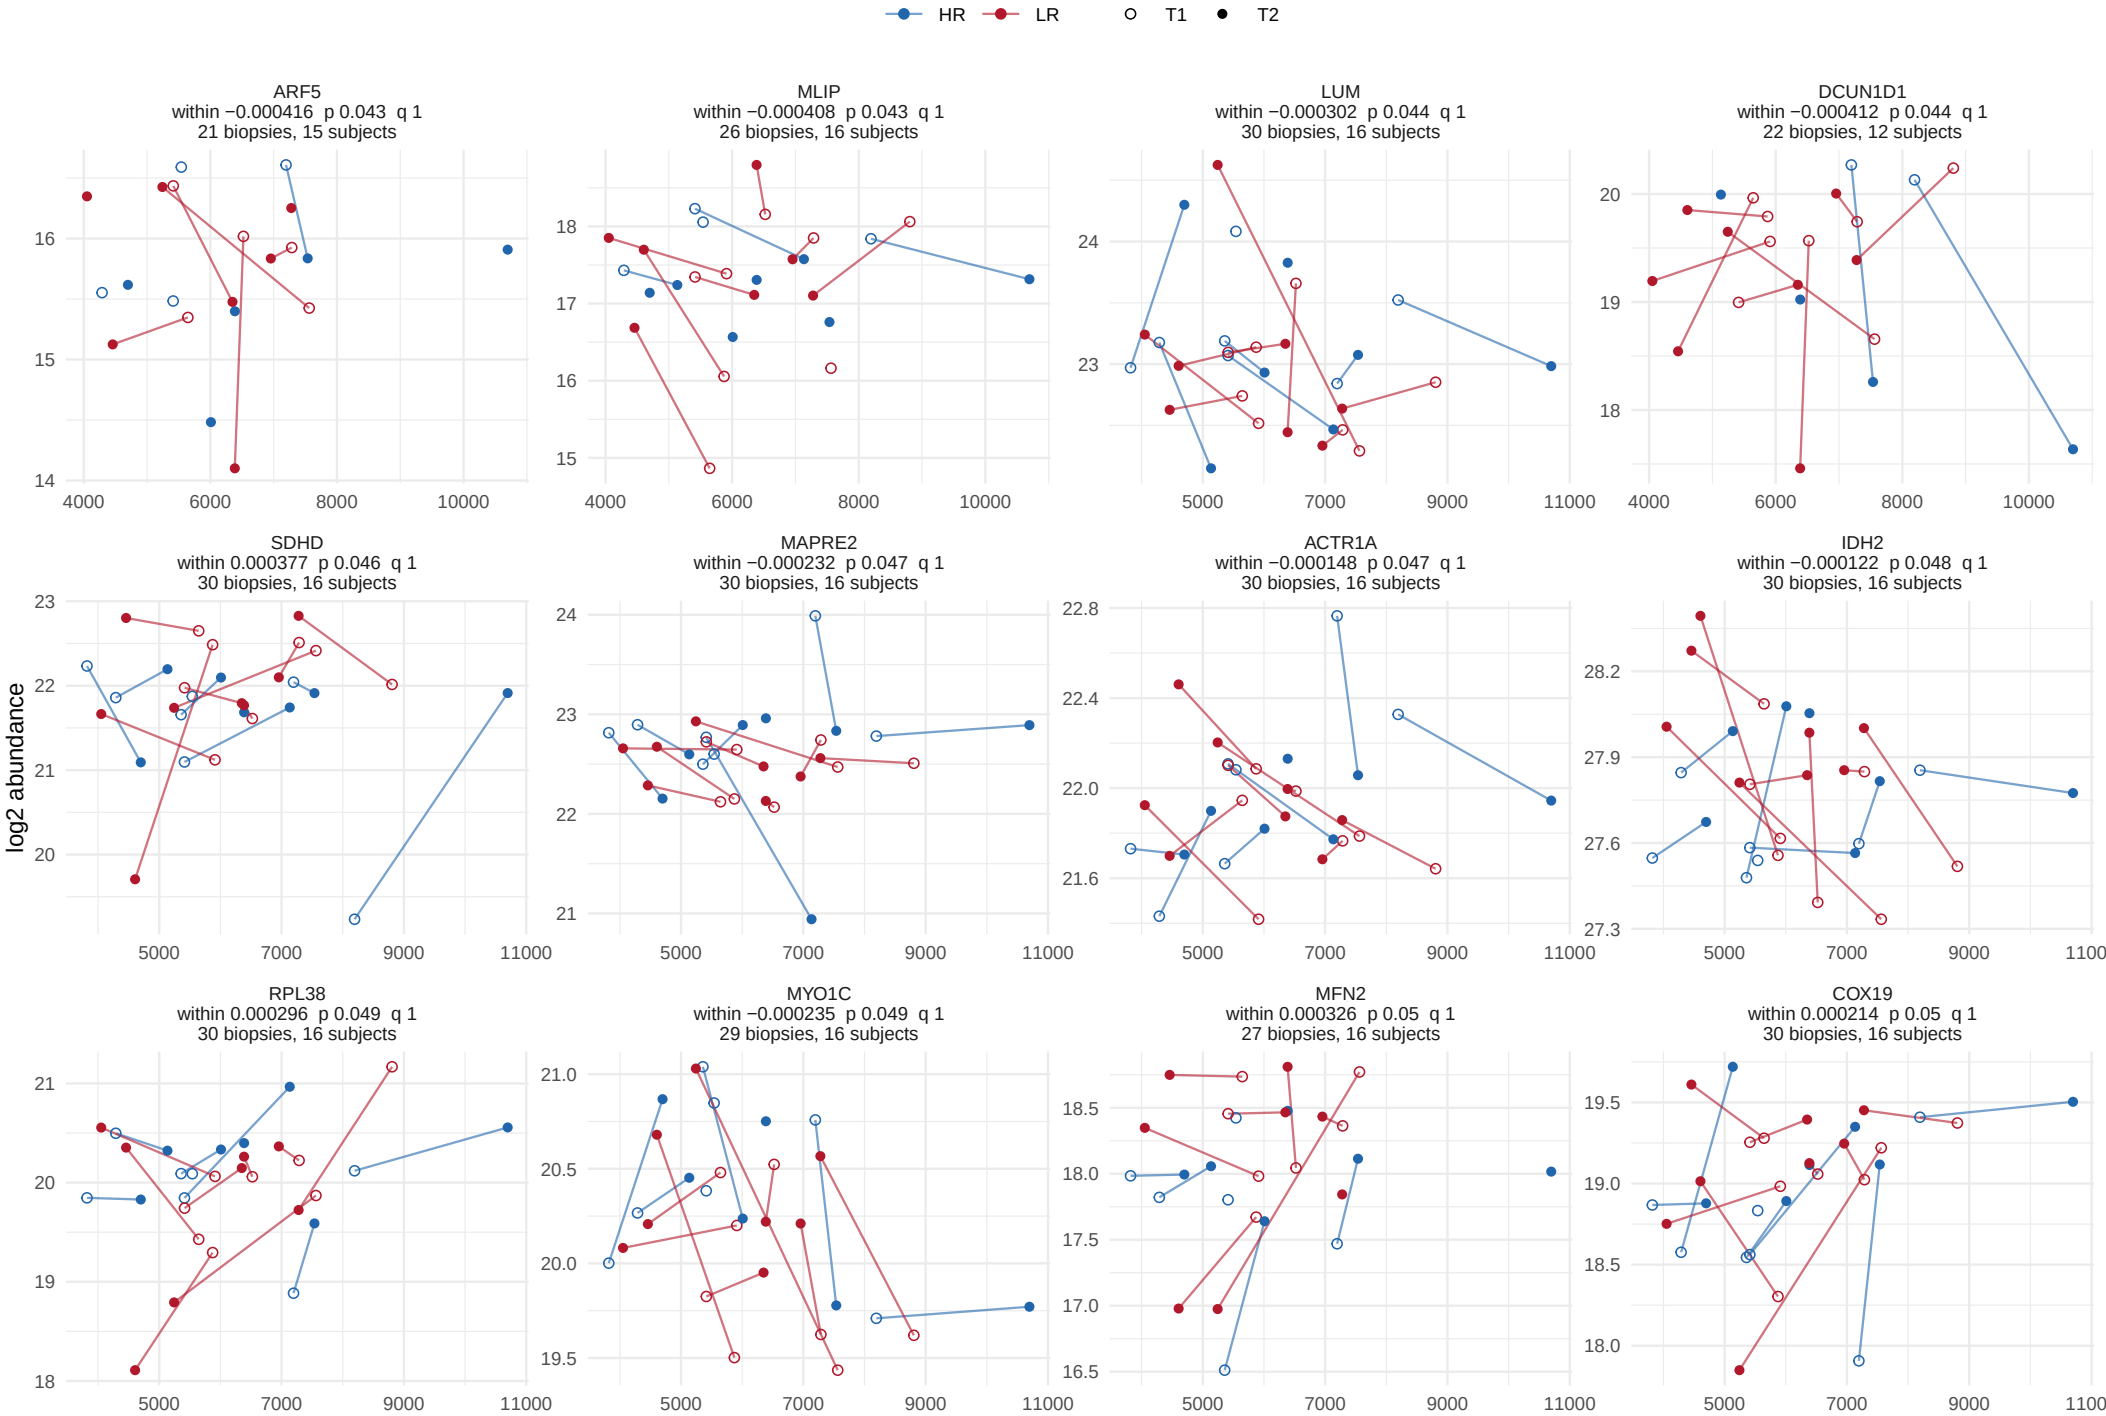

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_mixed, within−person term


62 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 6 of 6.

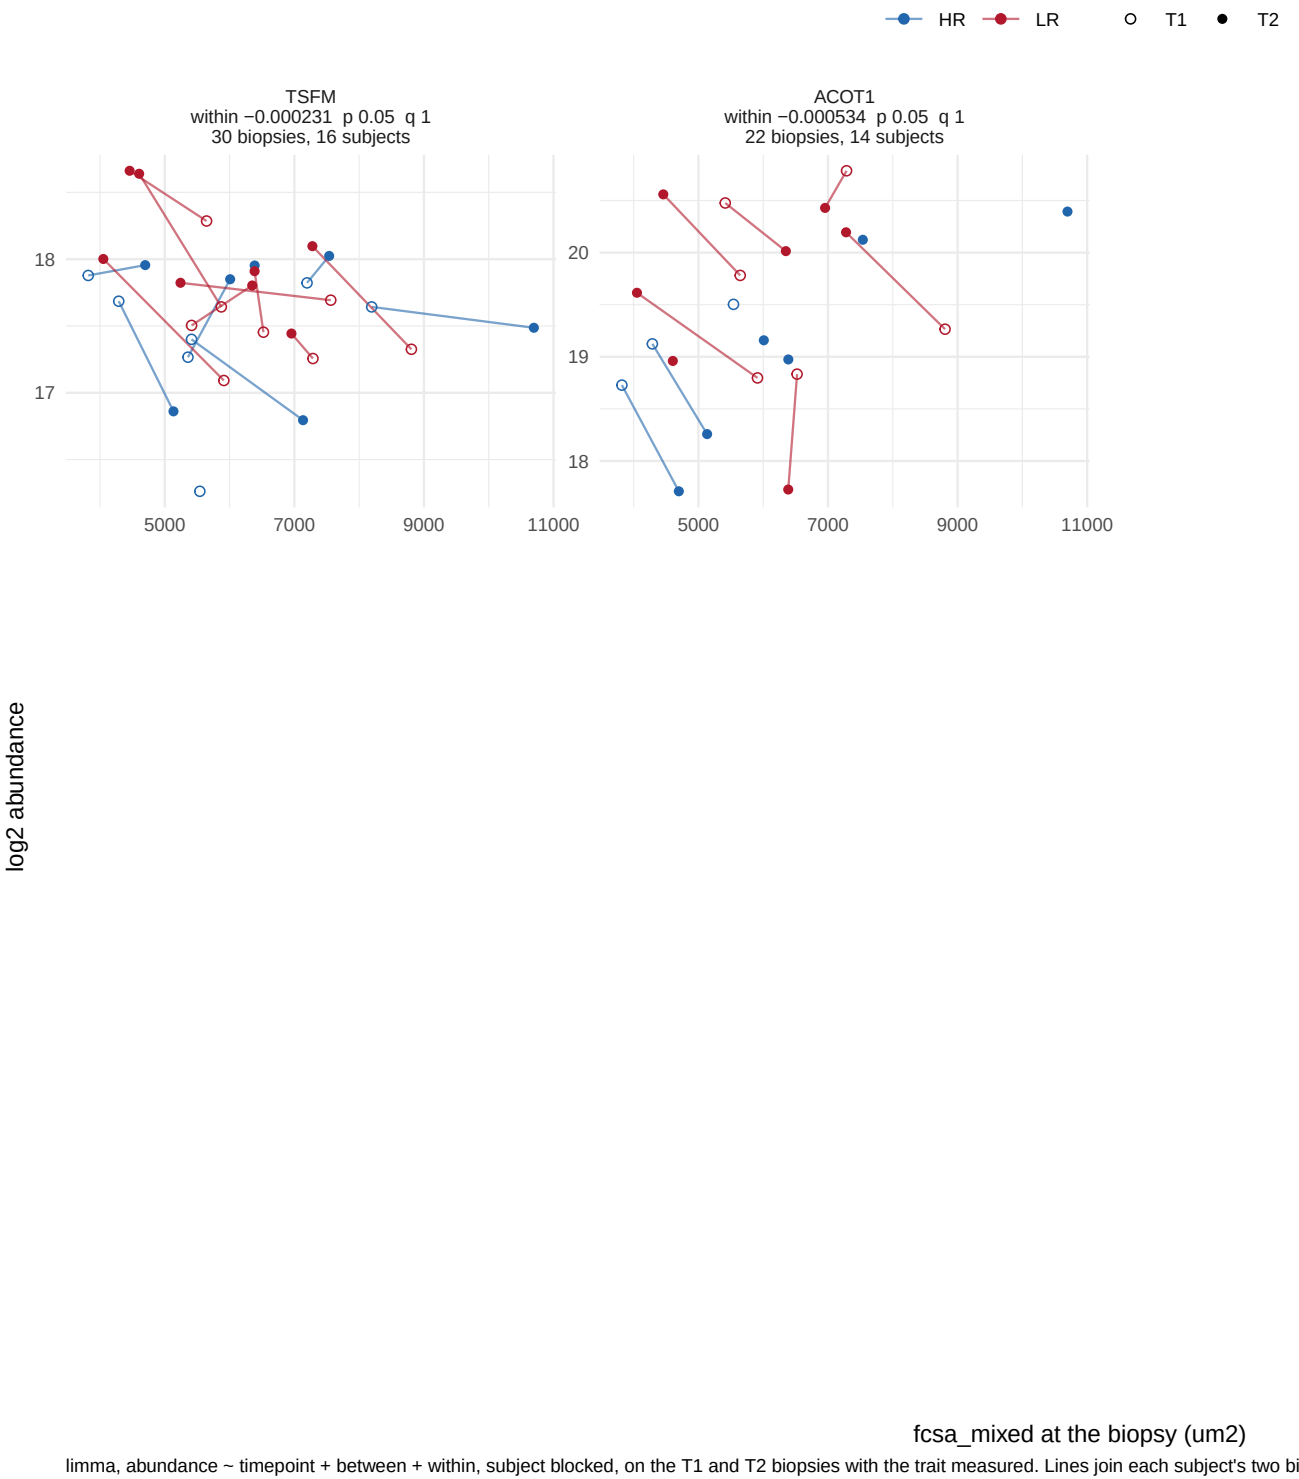

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_mixed, between−person term


73 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 1 of 7.

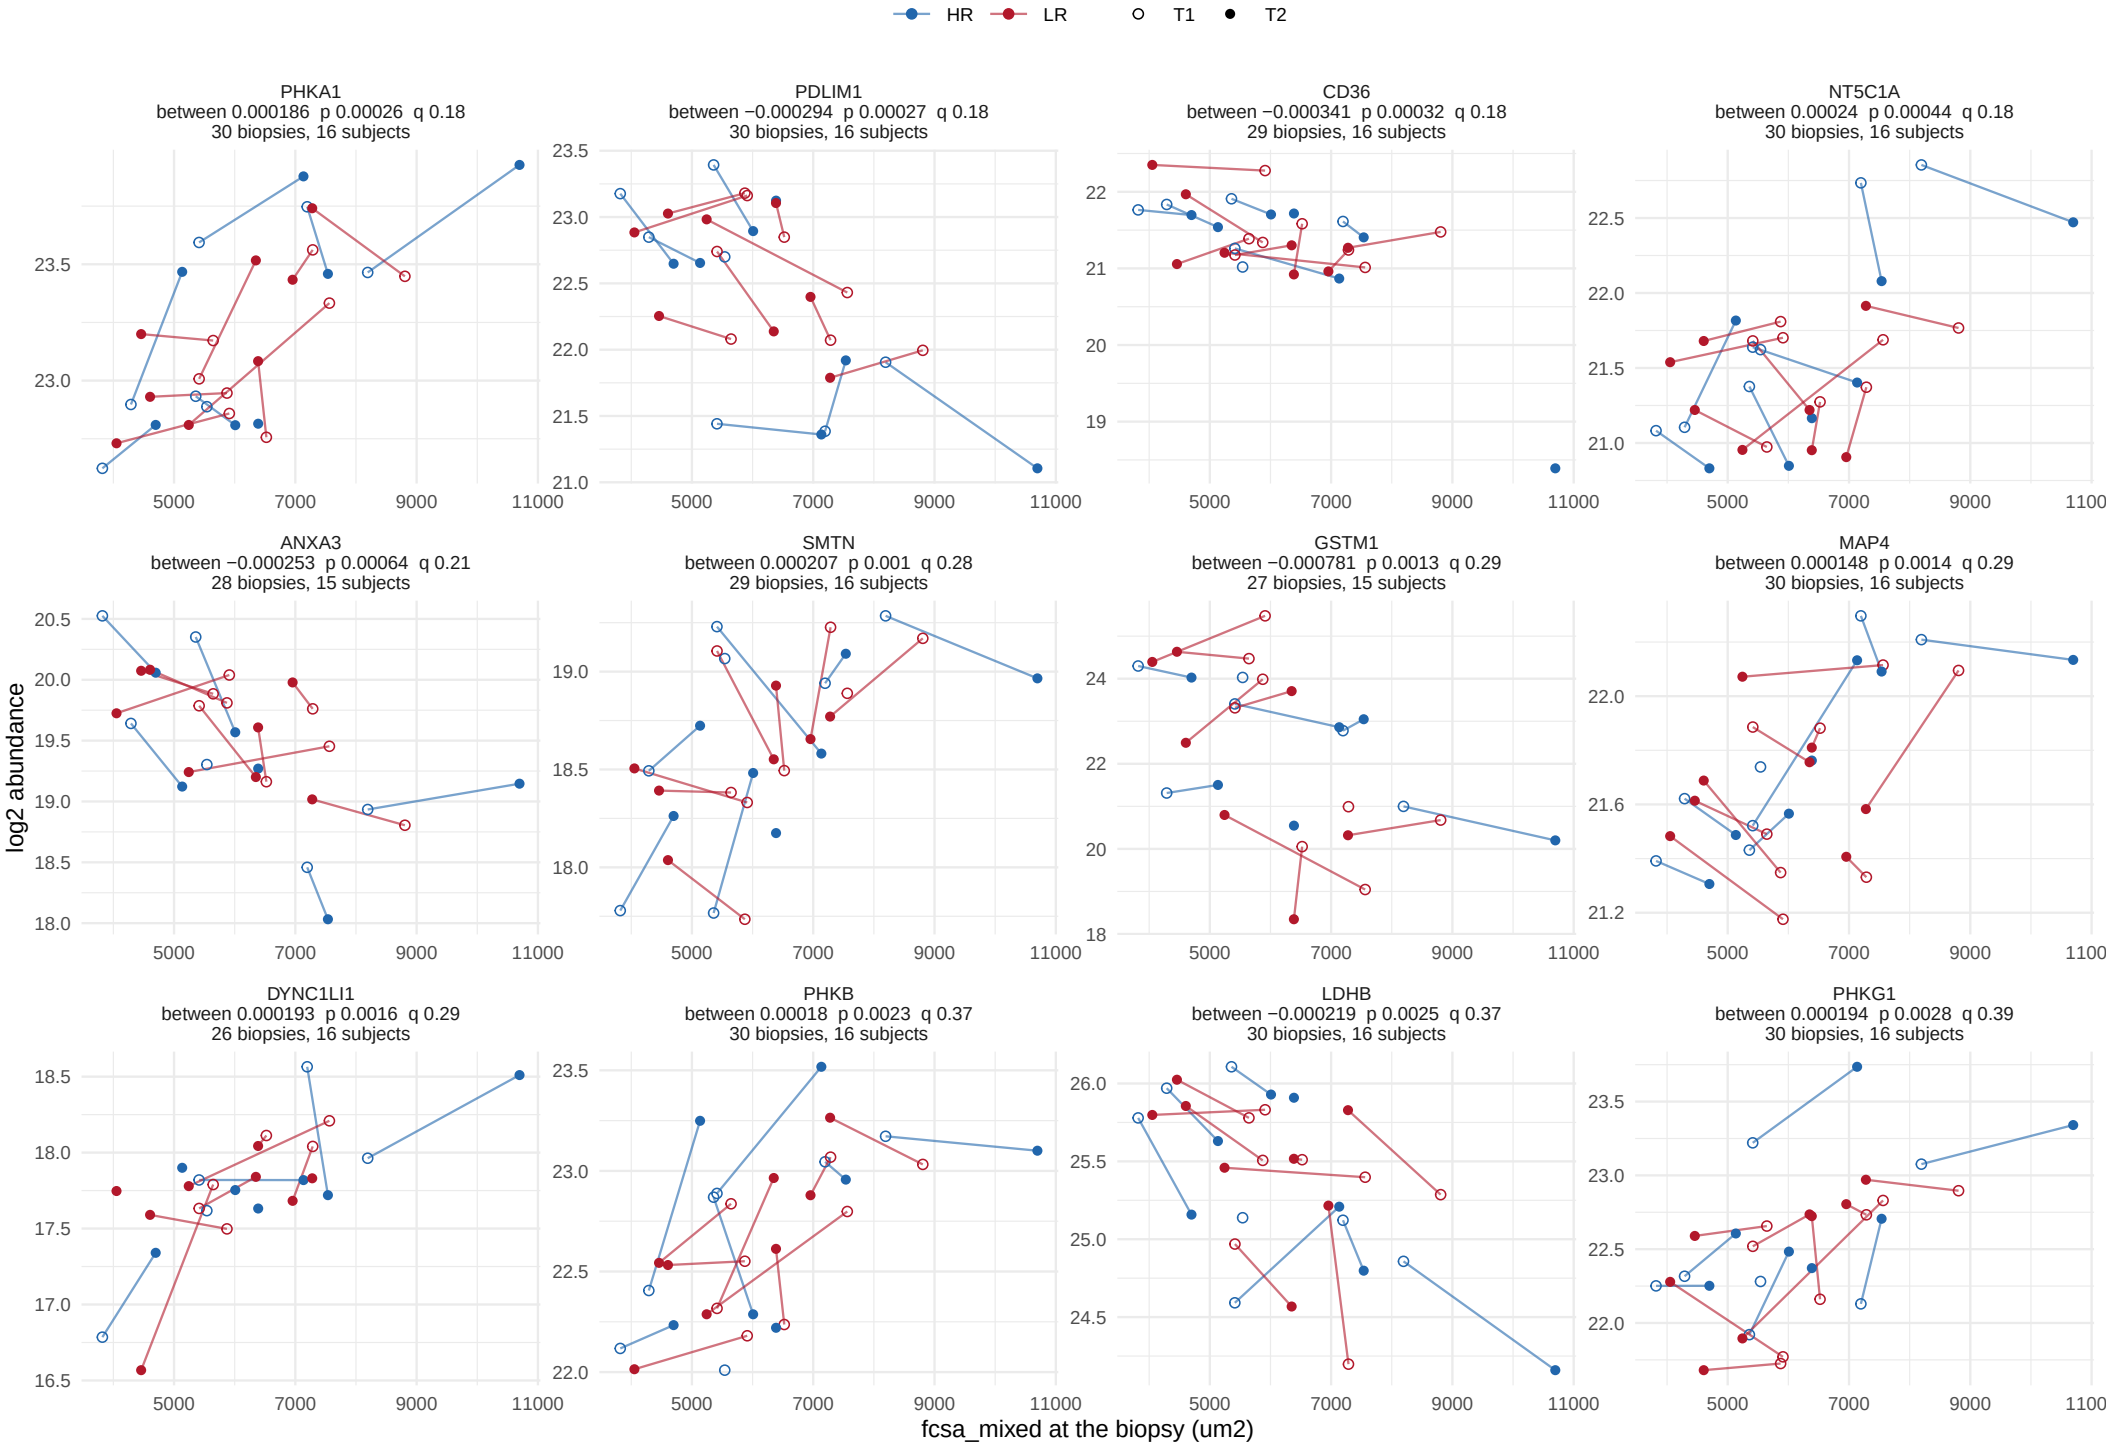

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_mixed, between−person term


73 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 2 of 7.

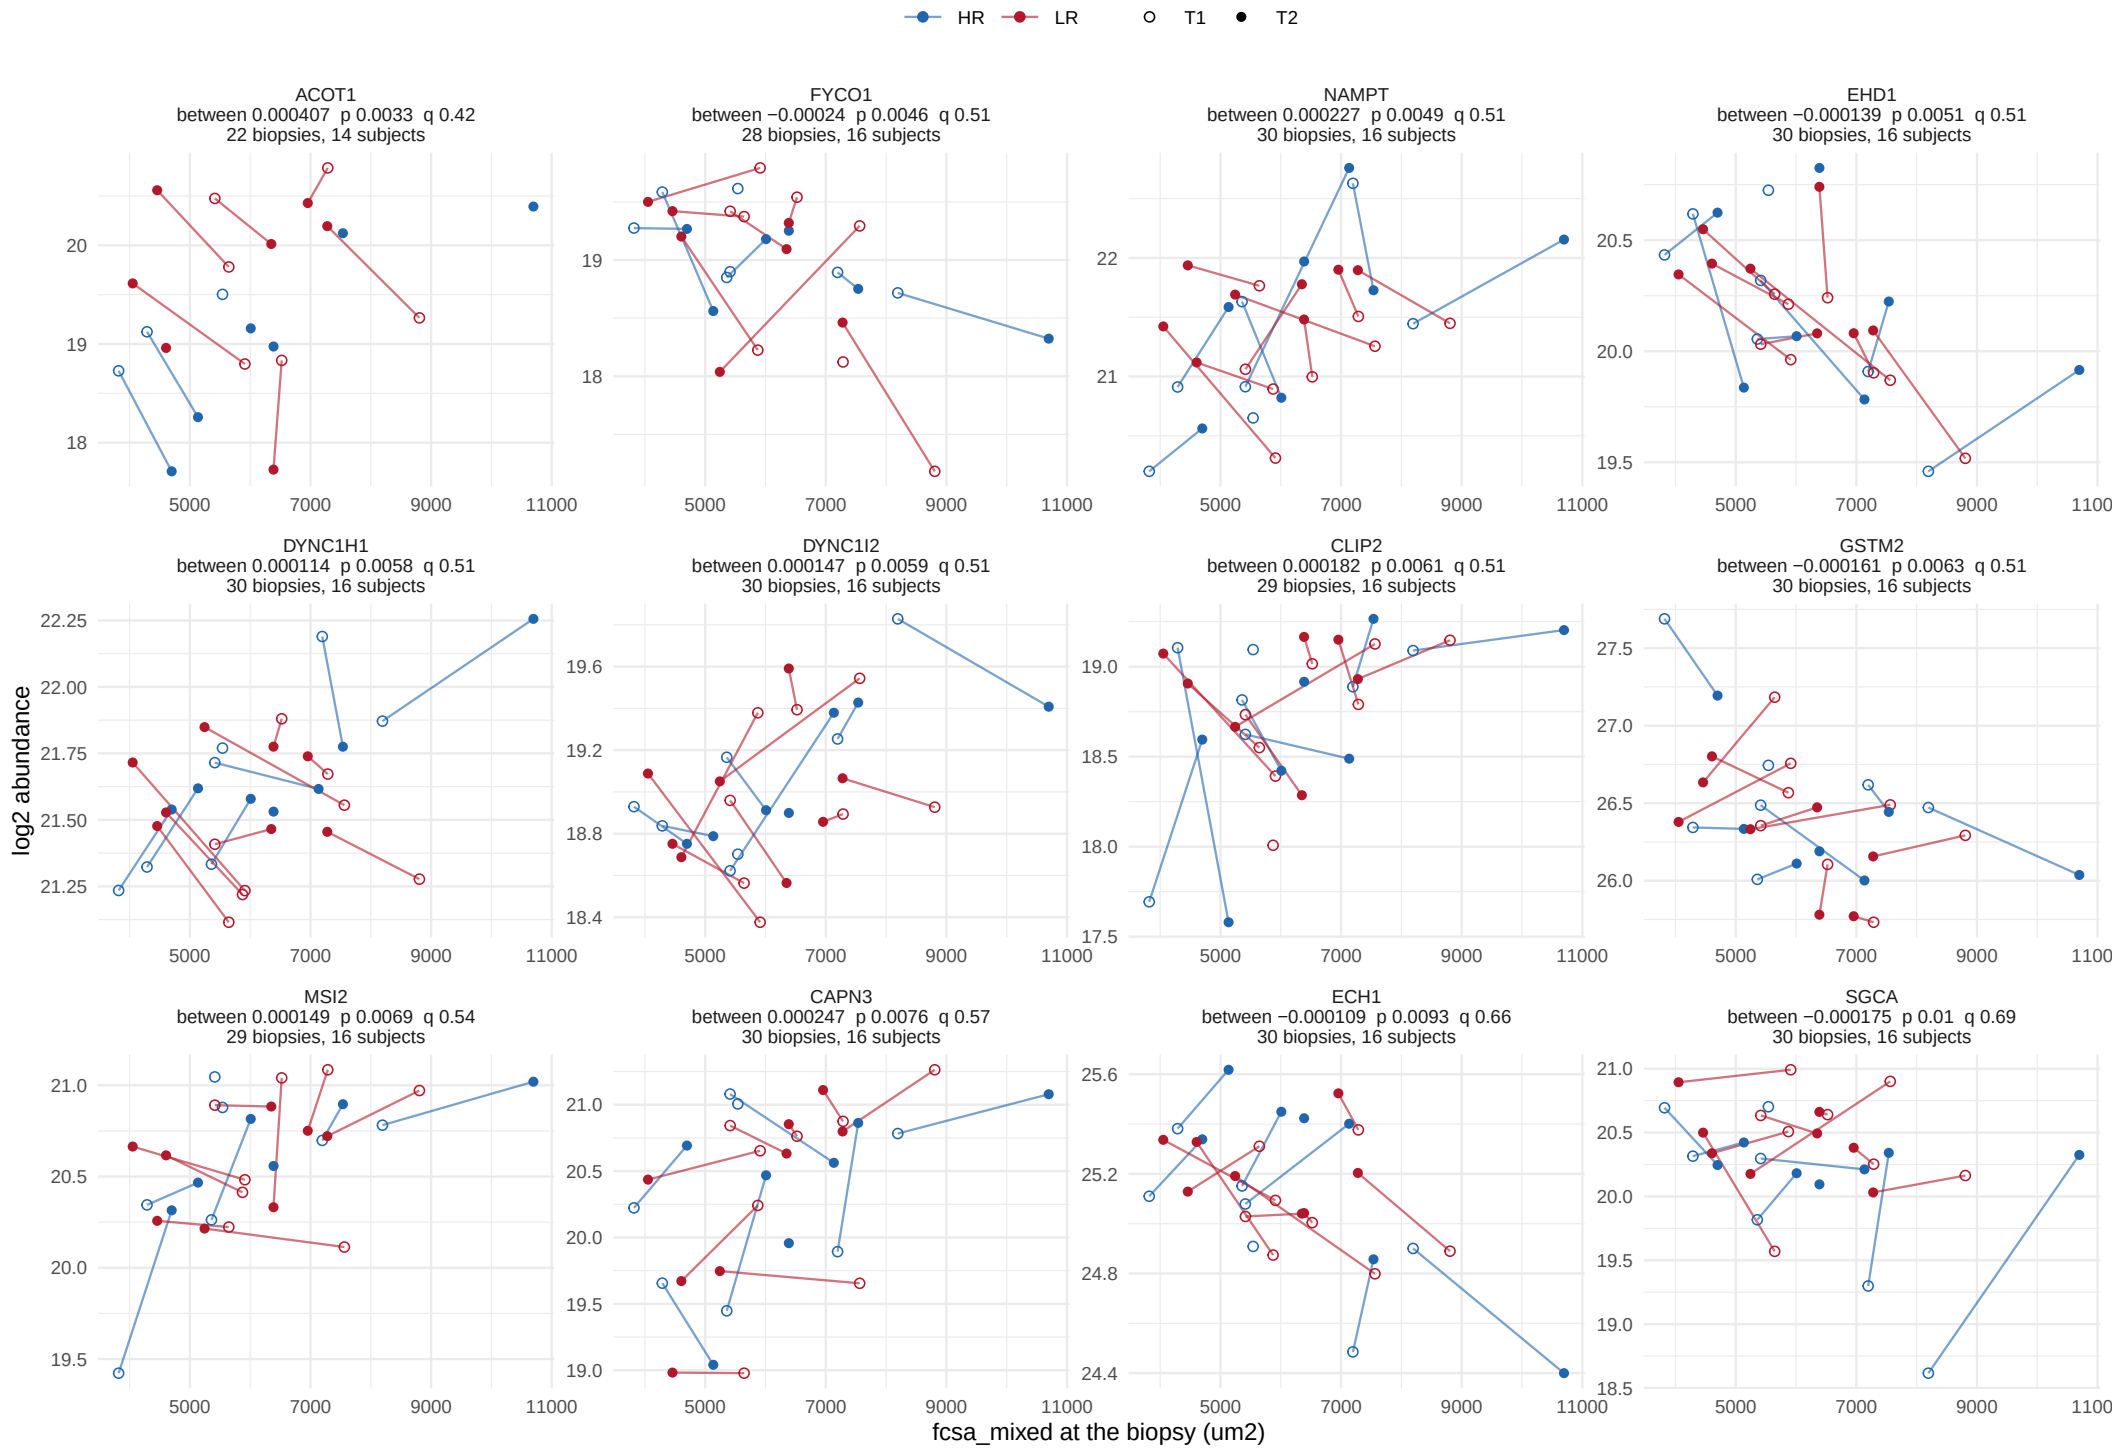

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_mixed, between−person term


73 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 3 of 7.

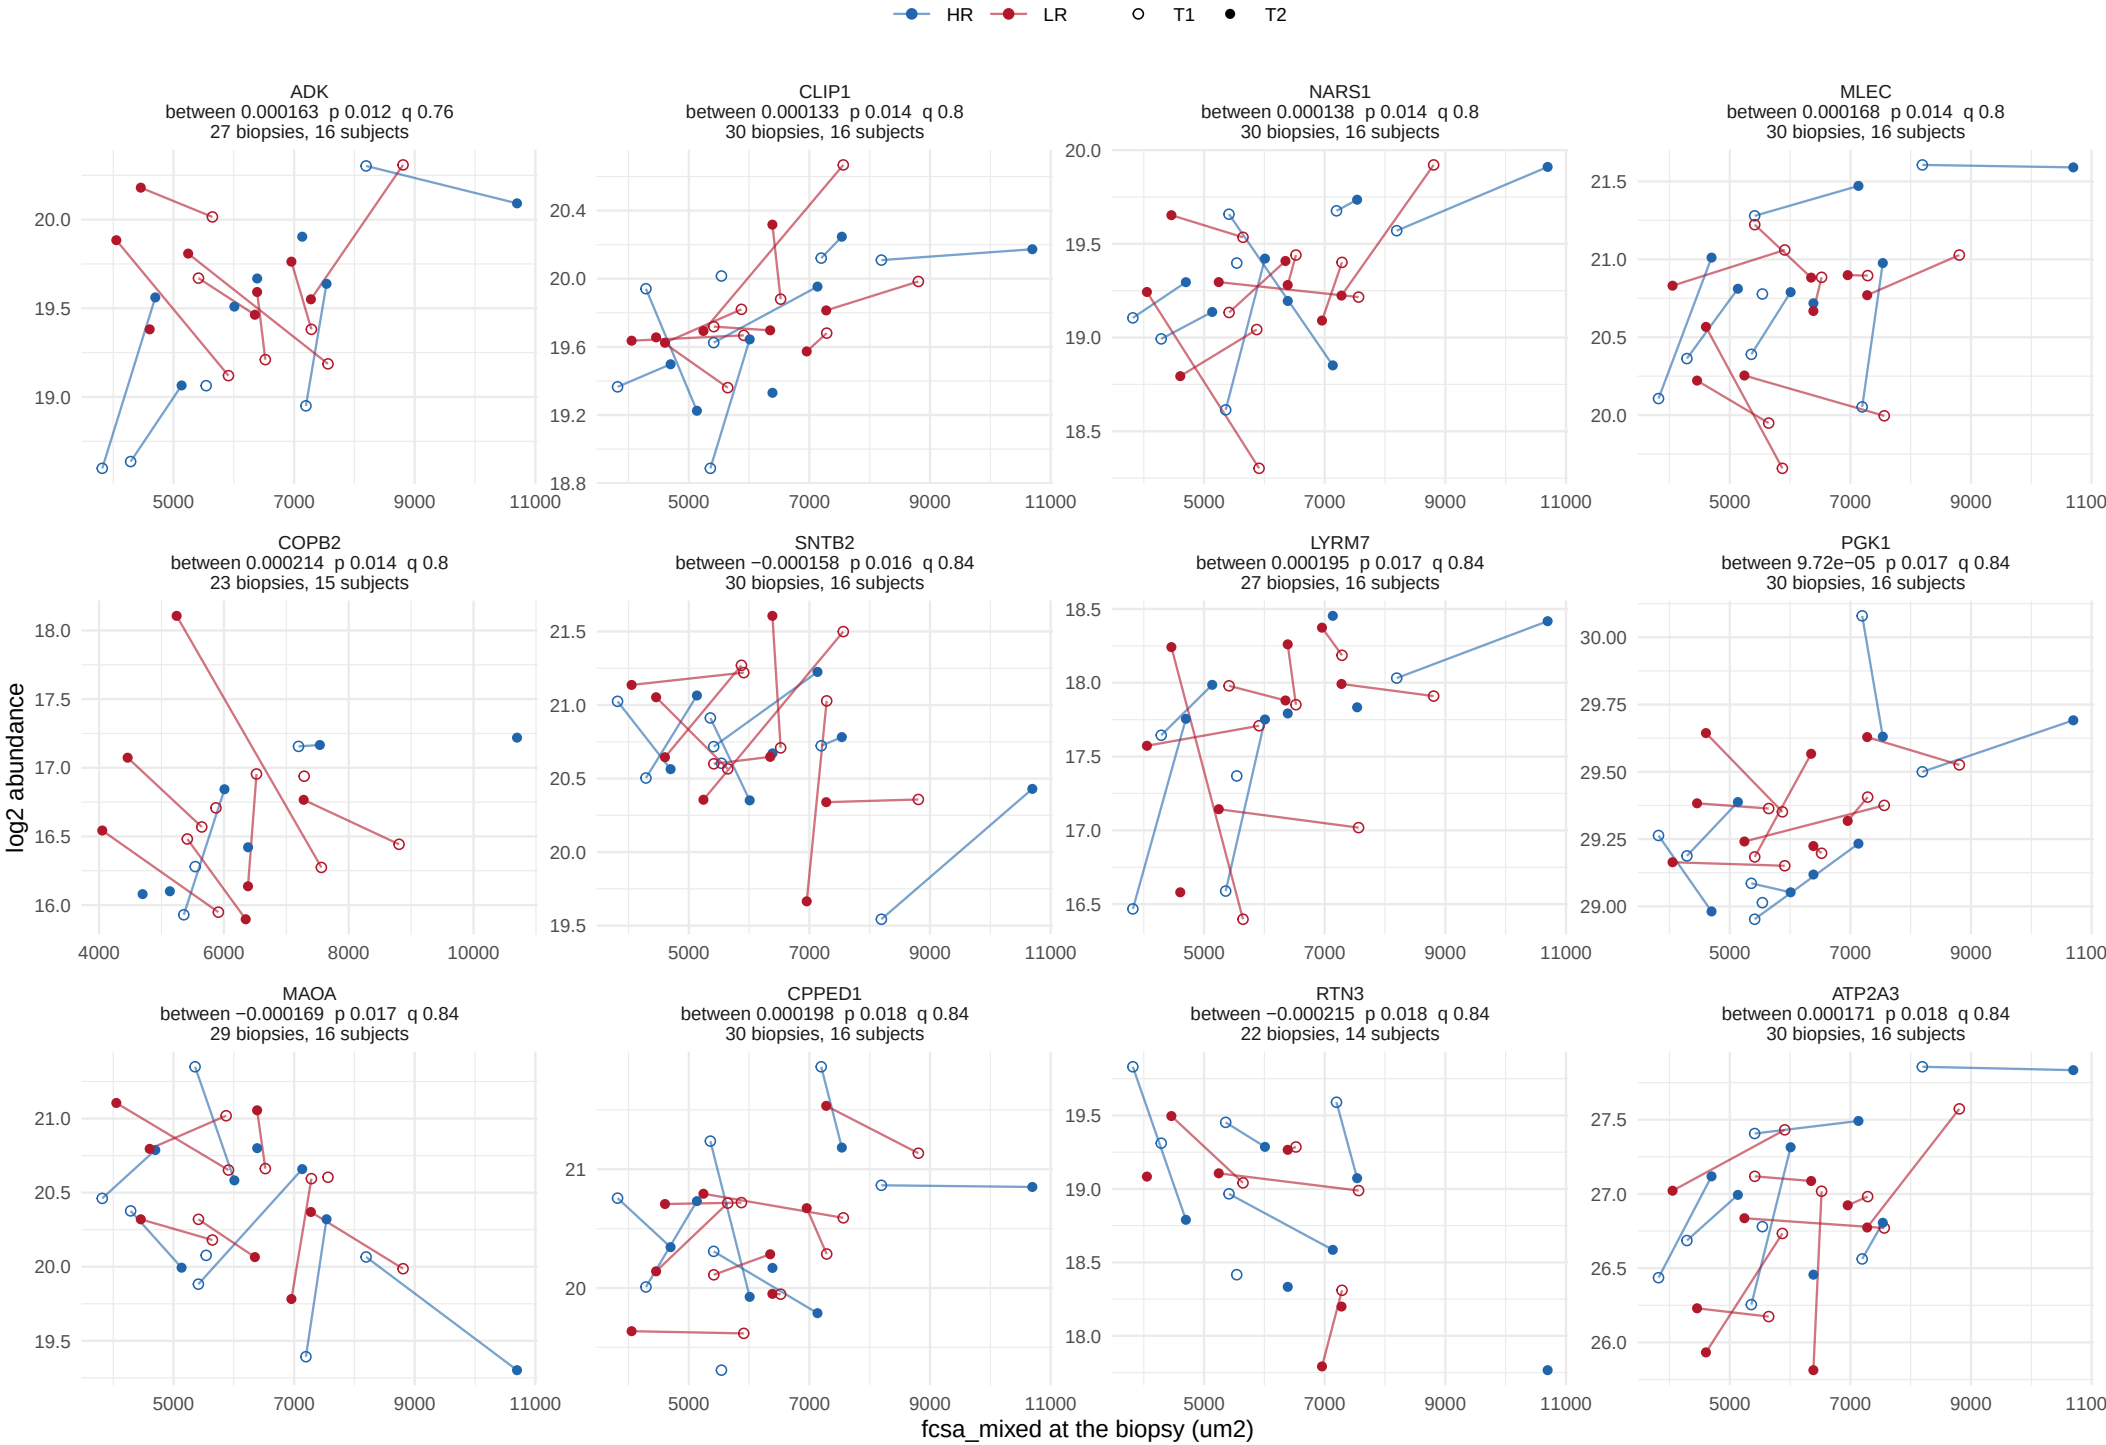

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_mixed, between−person term


73 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 4 of 7.

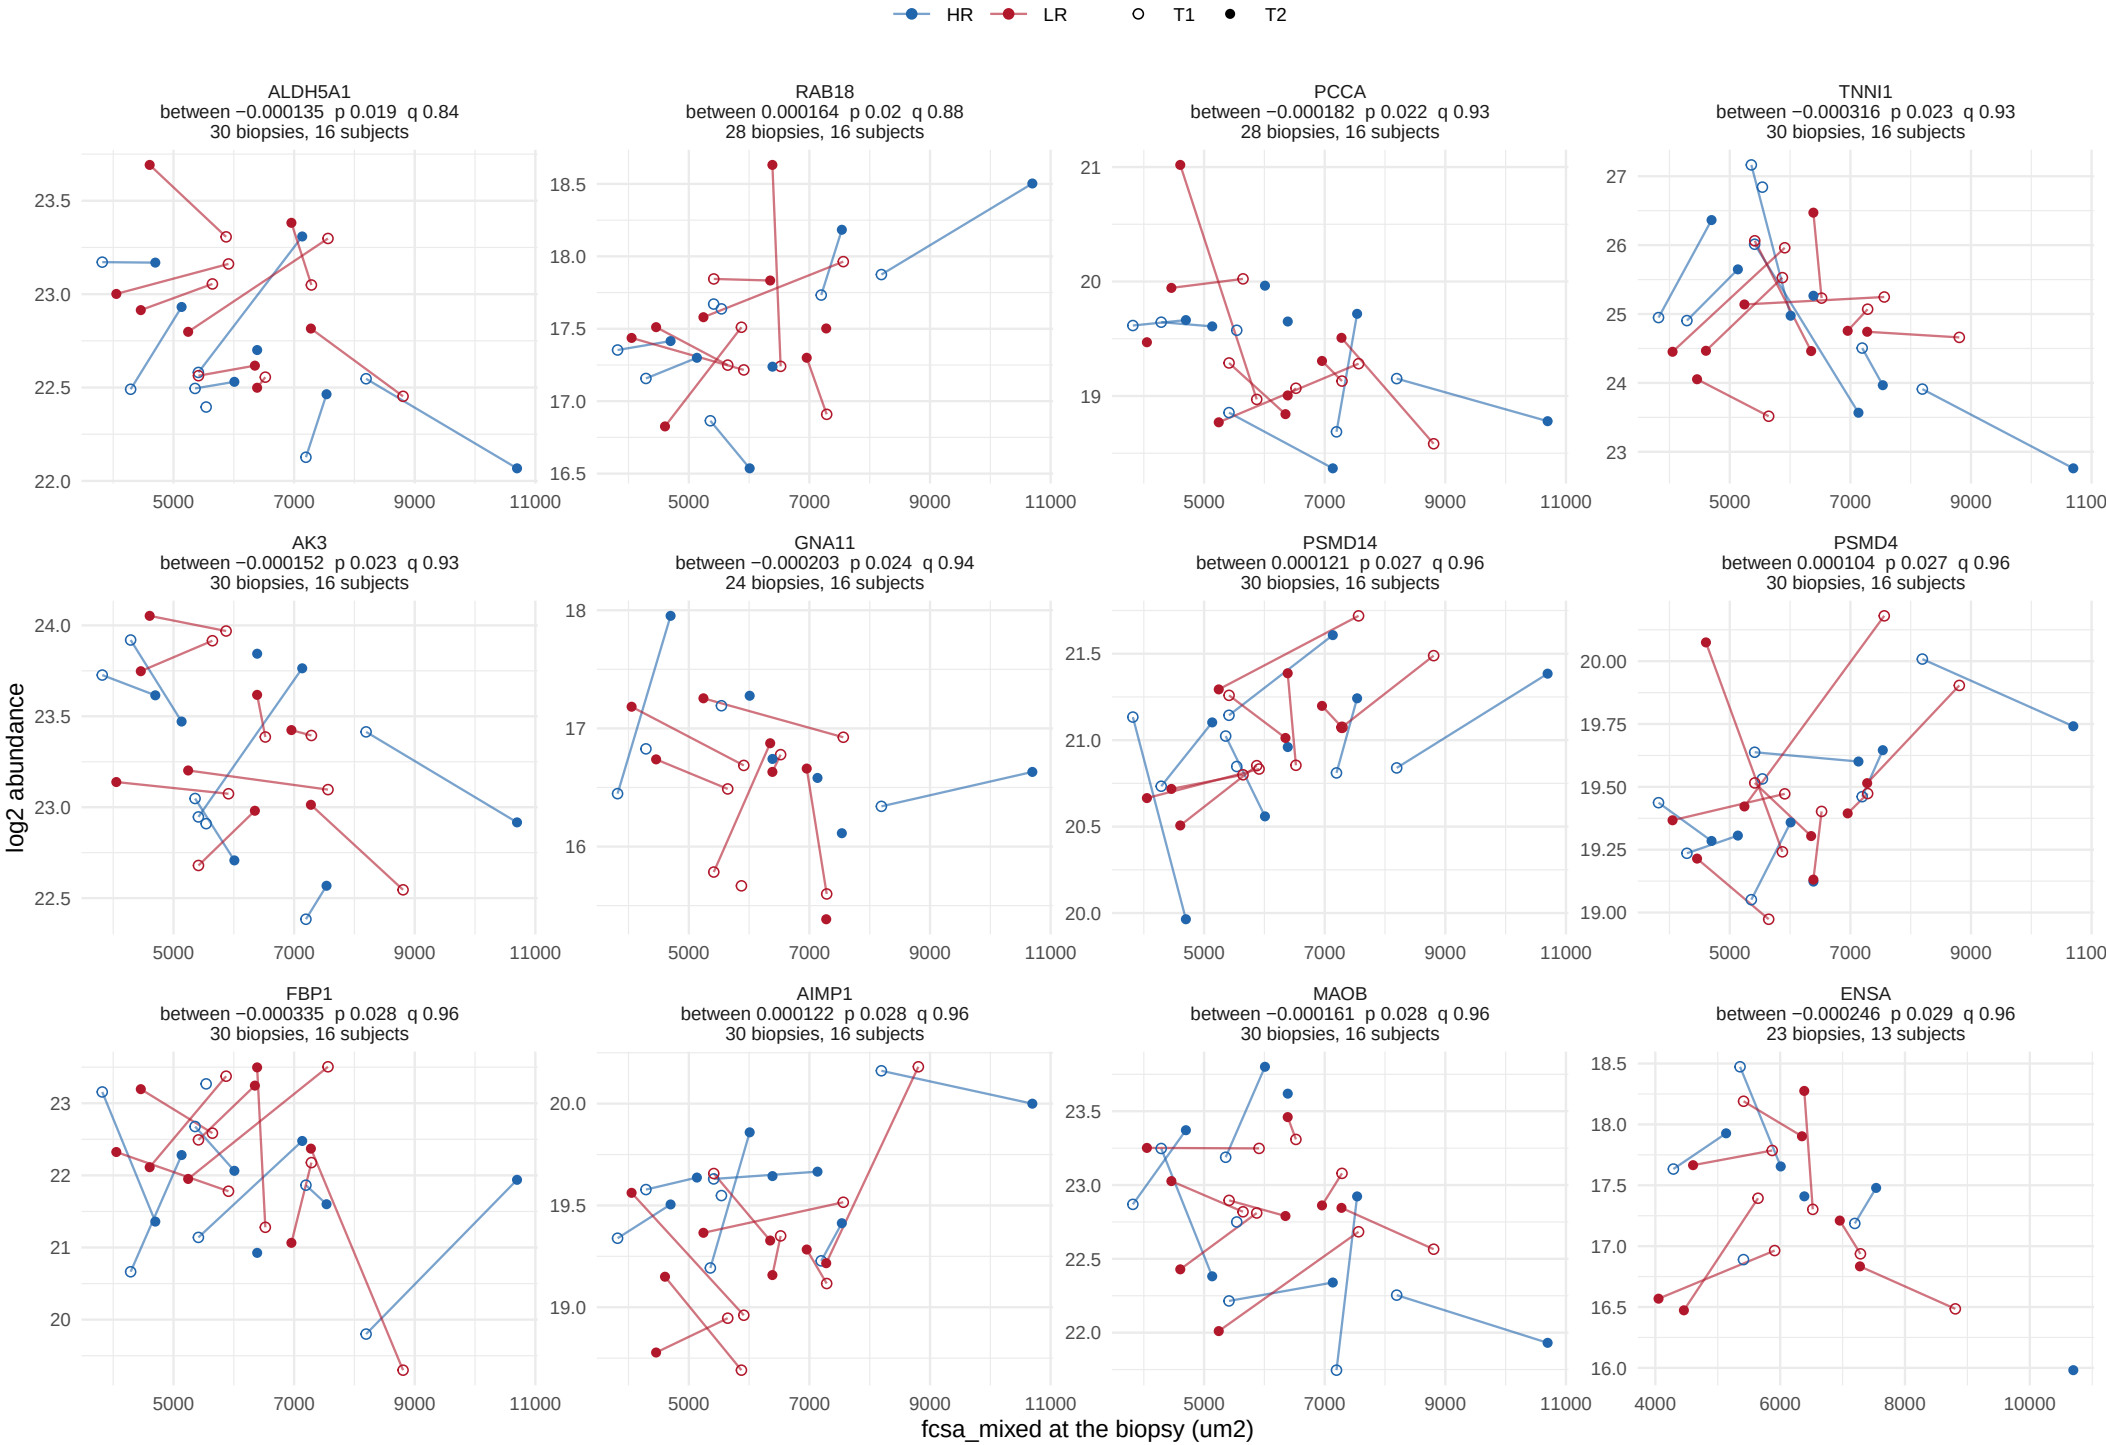

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_mixed, between−person term


73 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 5 of 7.

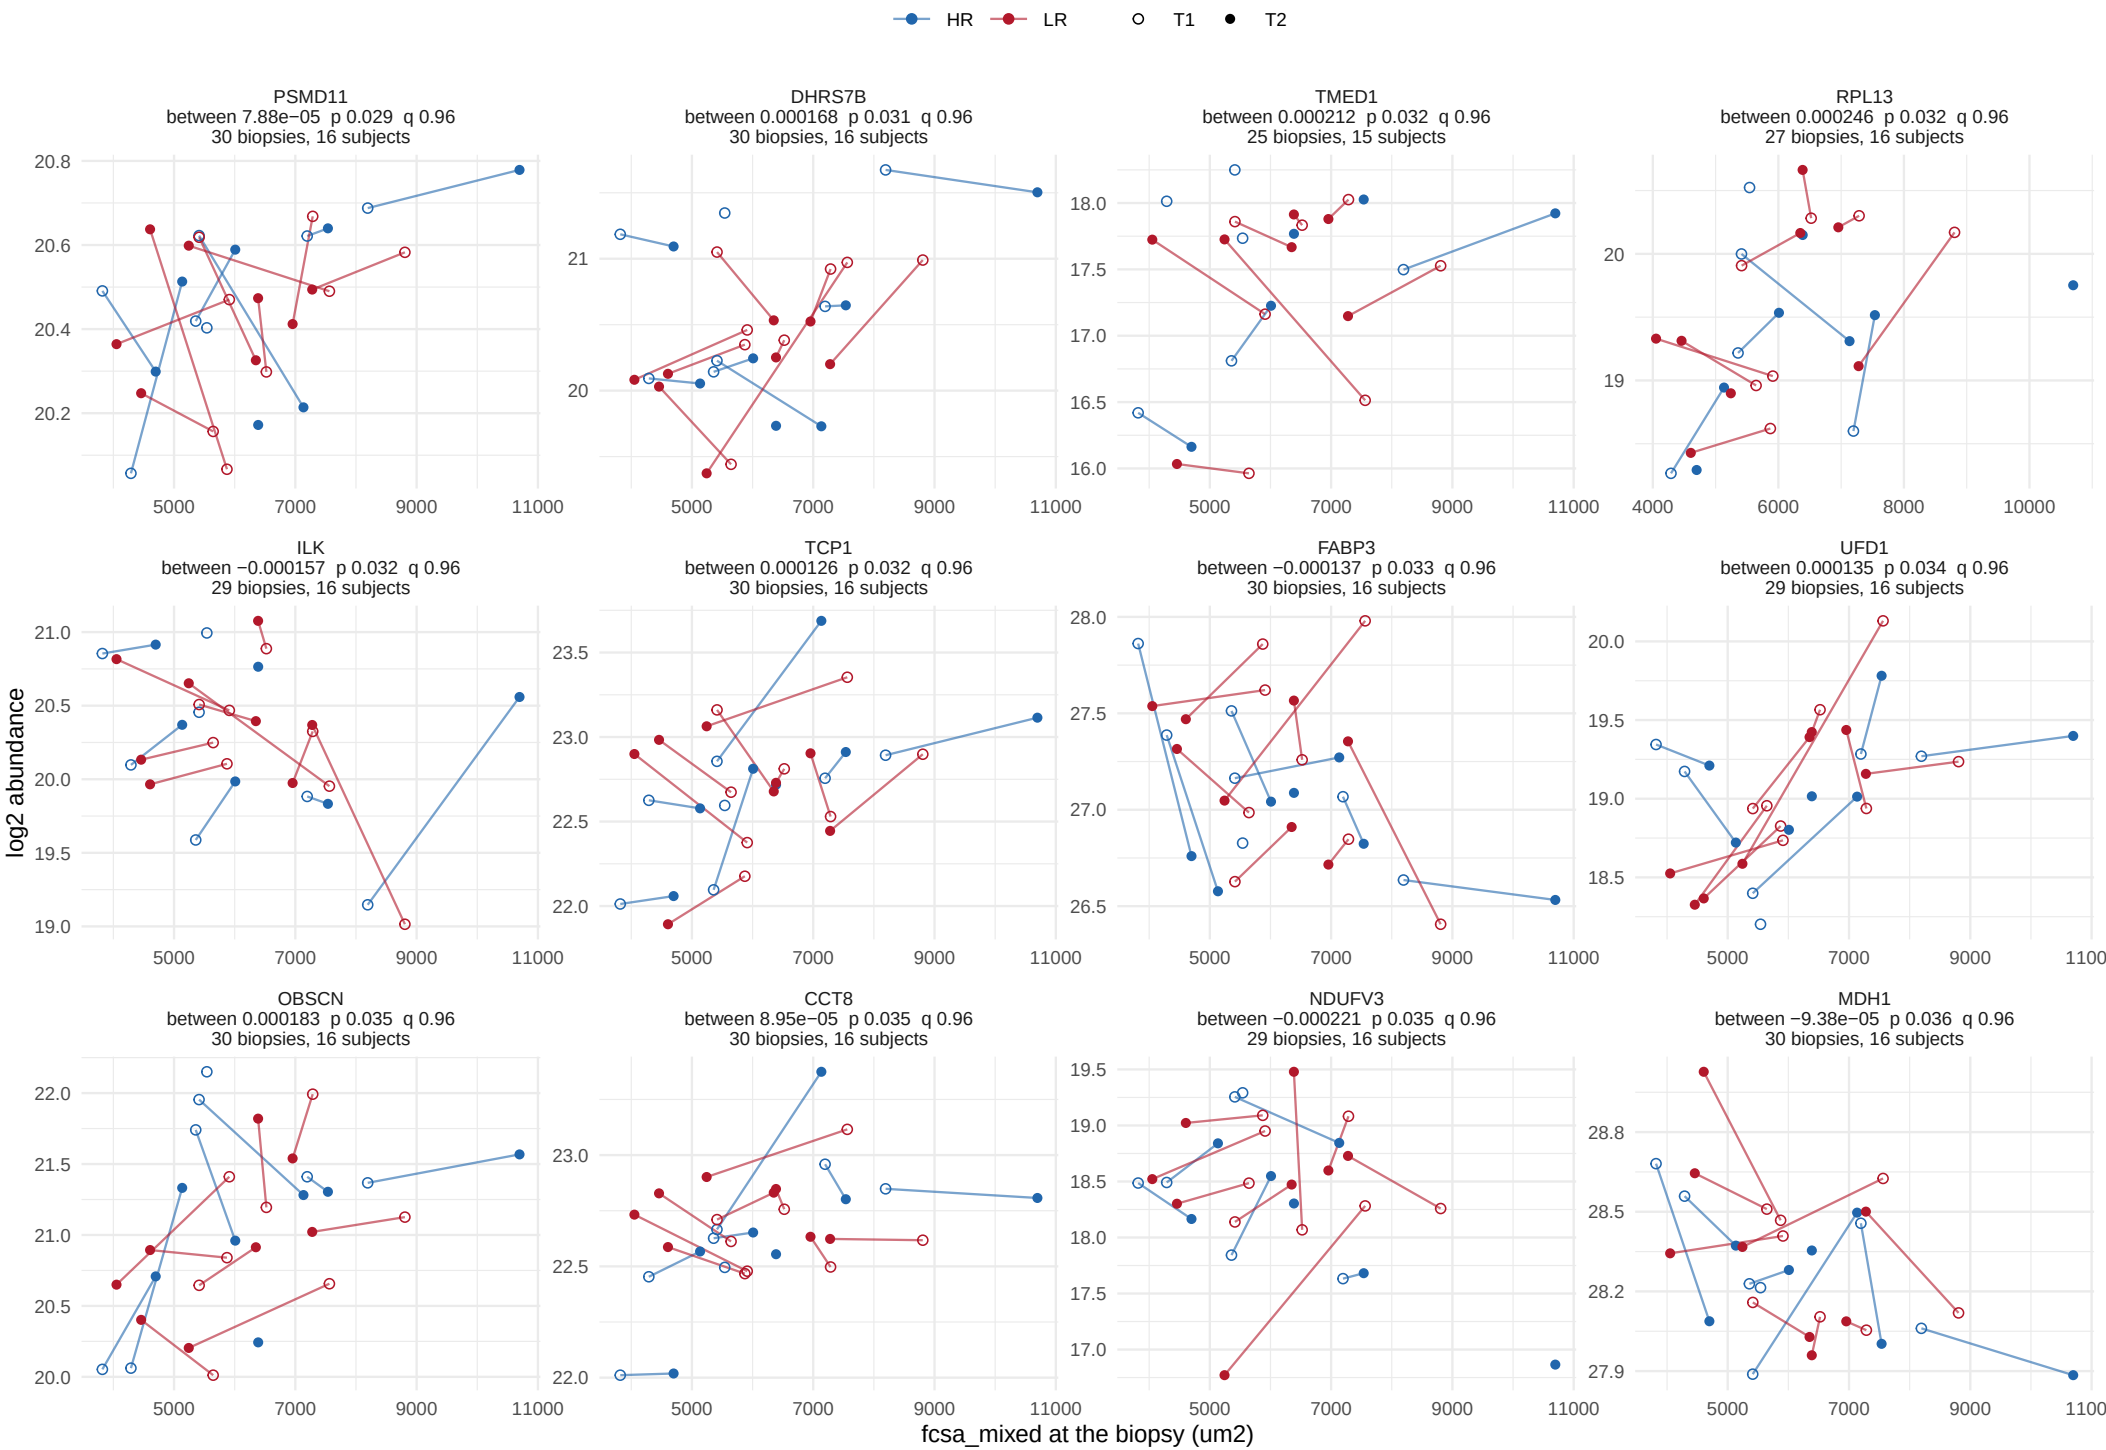

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_mixed, between−person term


73 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 6 of 7.

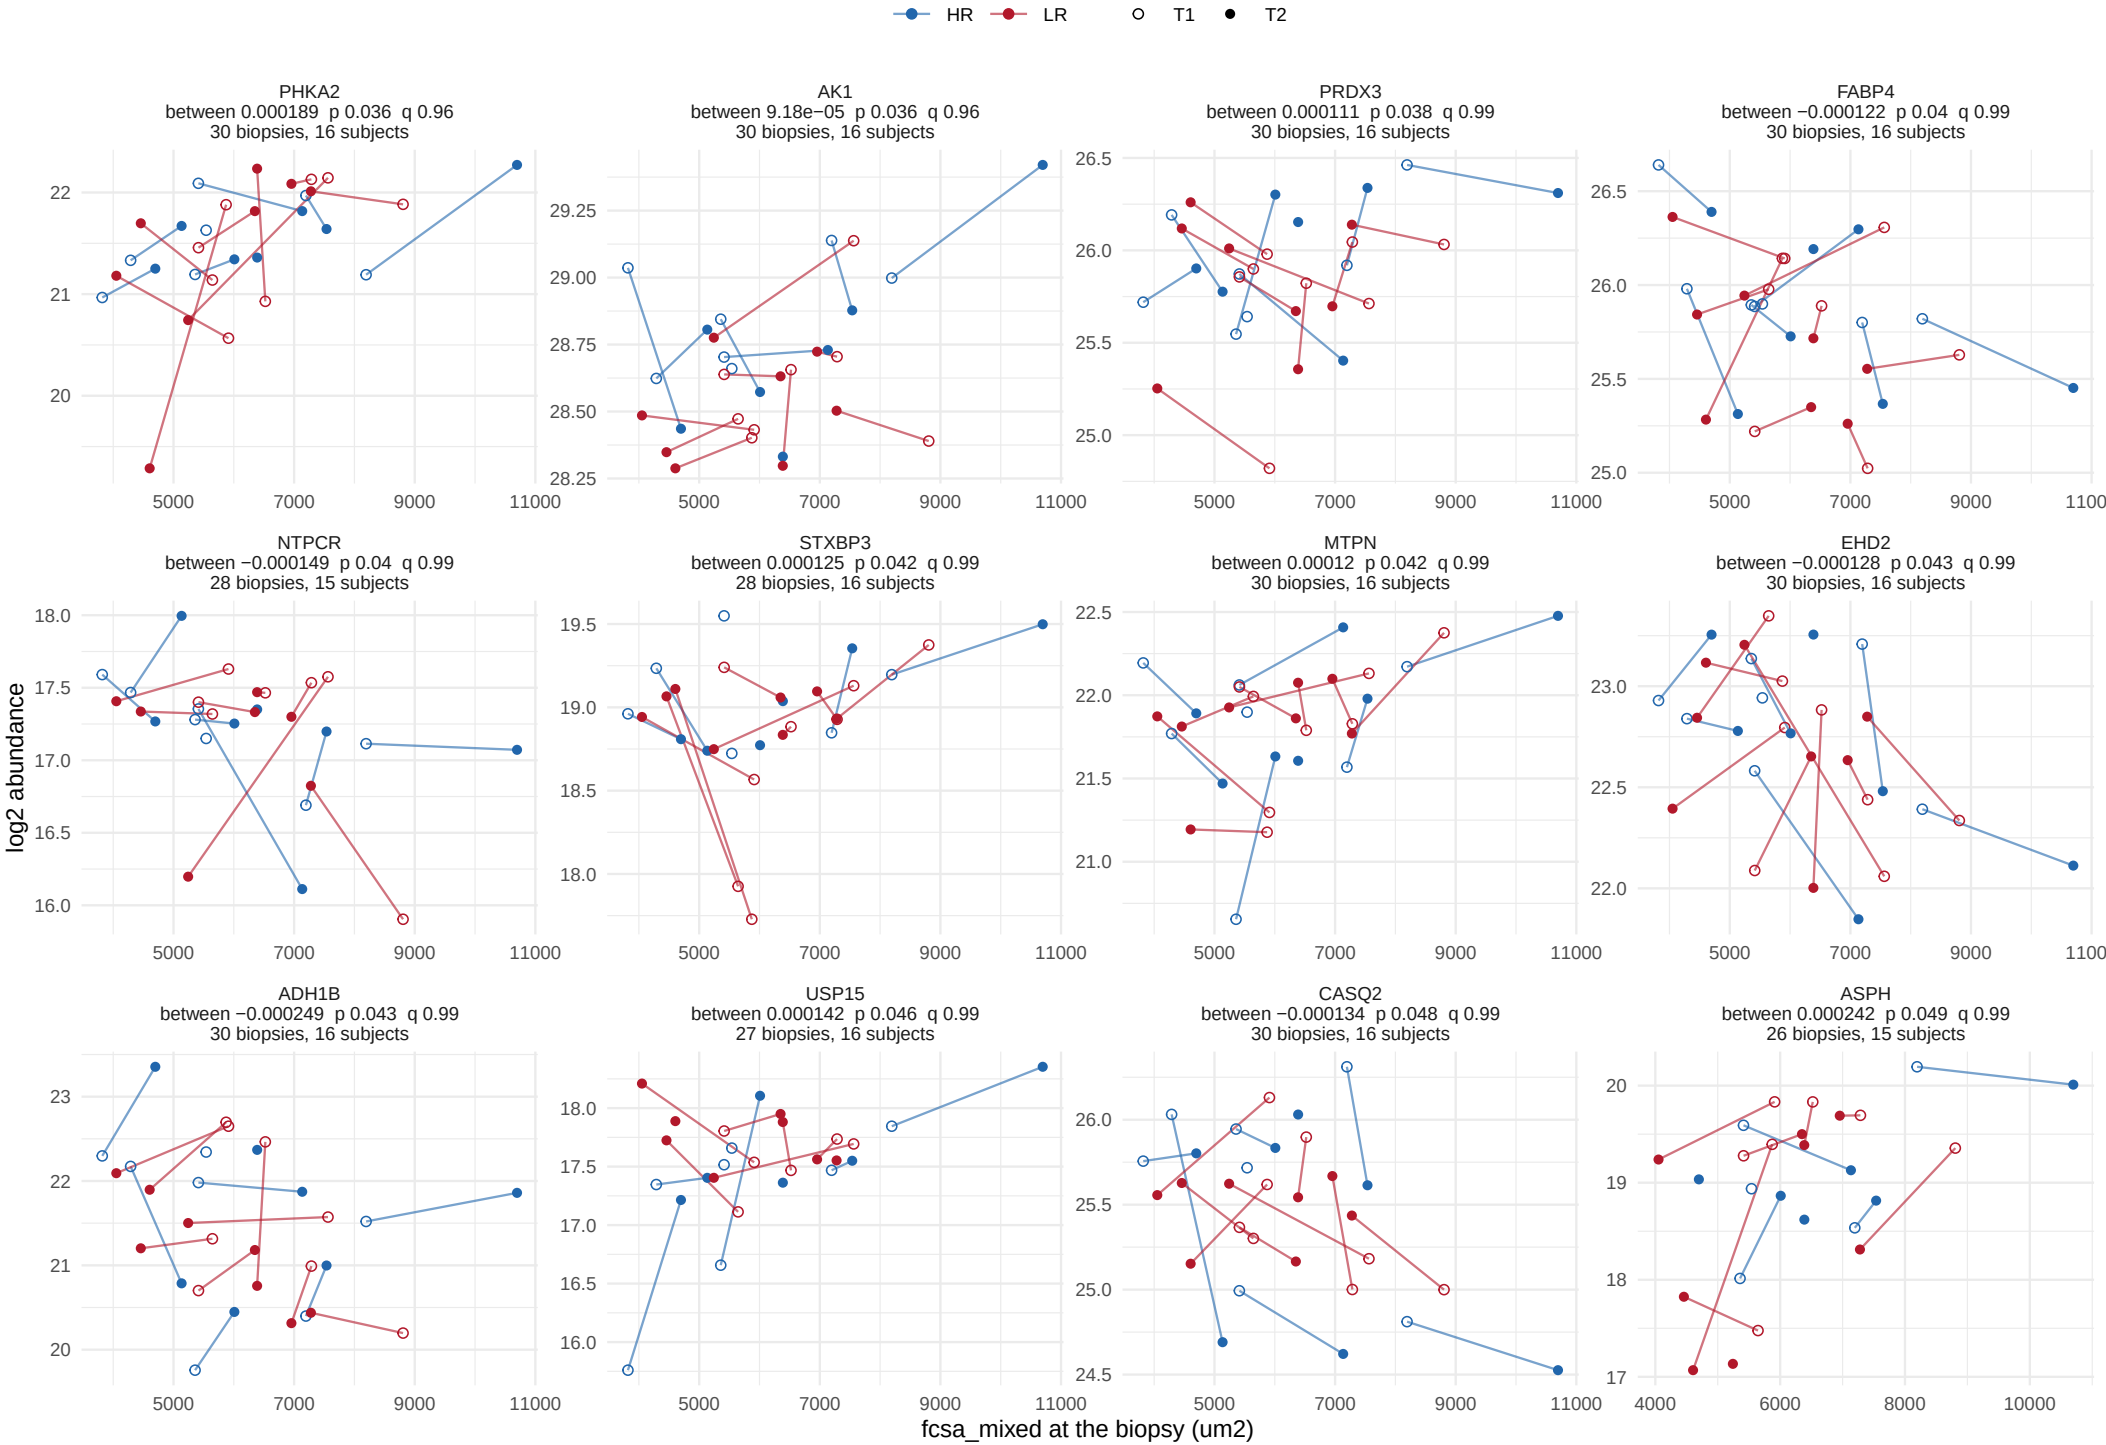

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_mixed, between−person term


73 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 7 of 7.

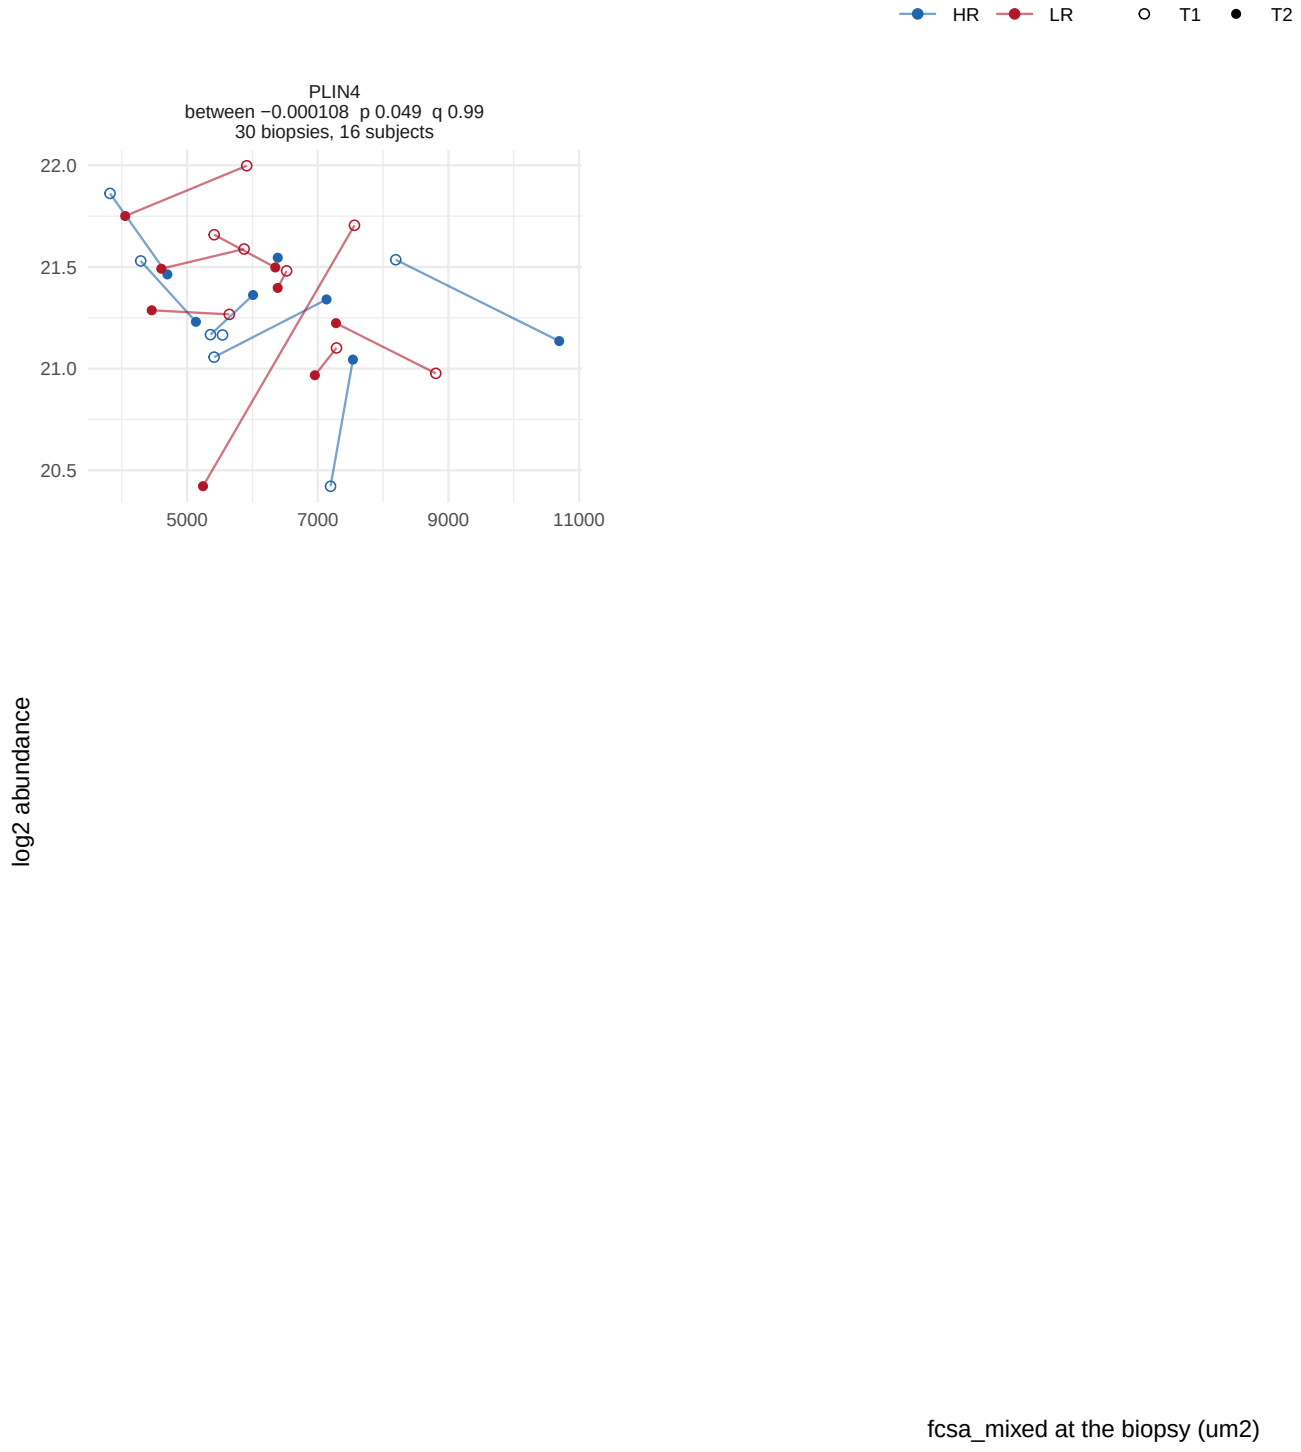

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_type1, within−person term


63 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 1 of 6.

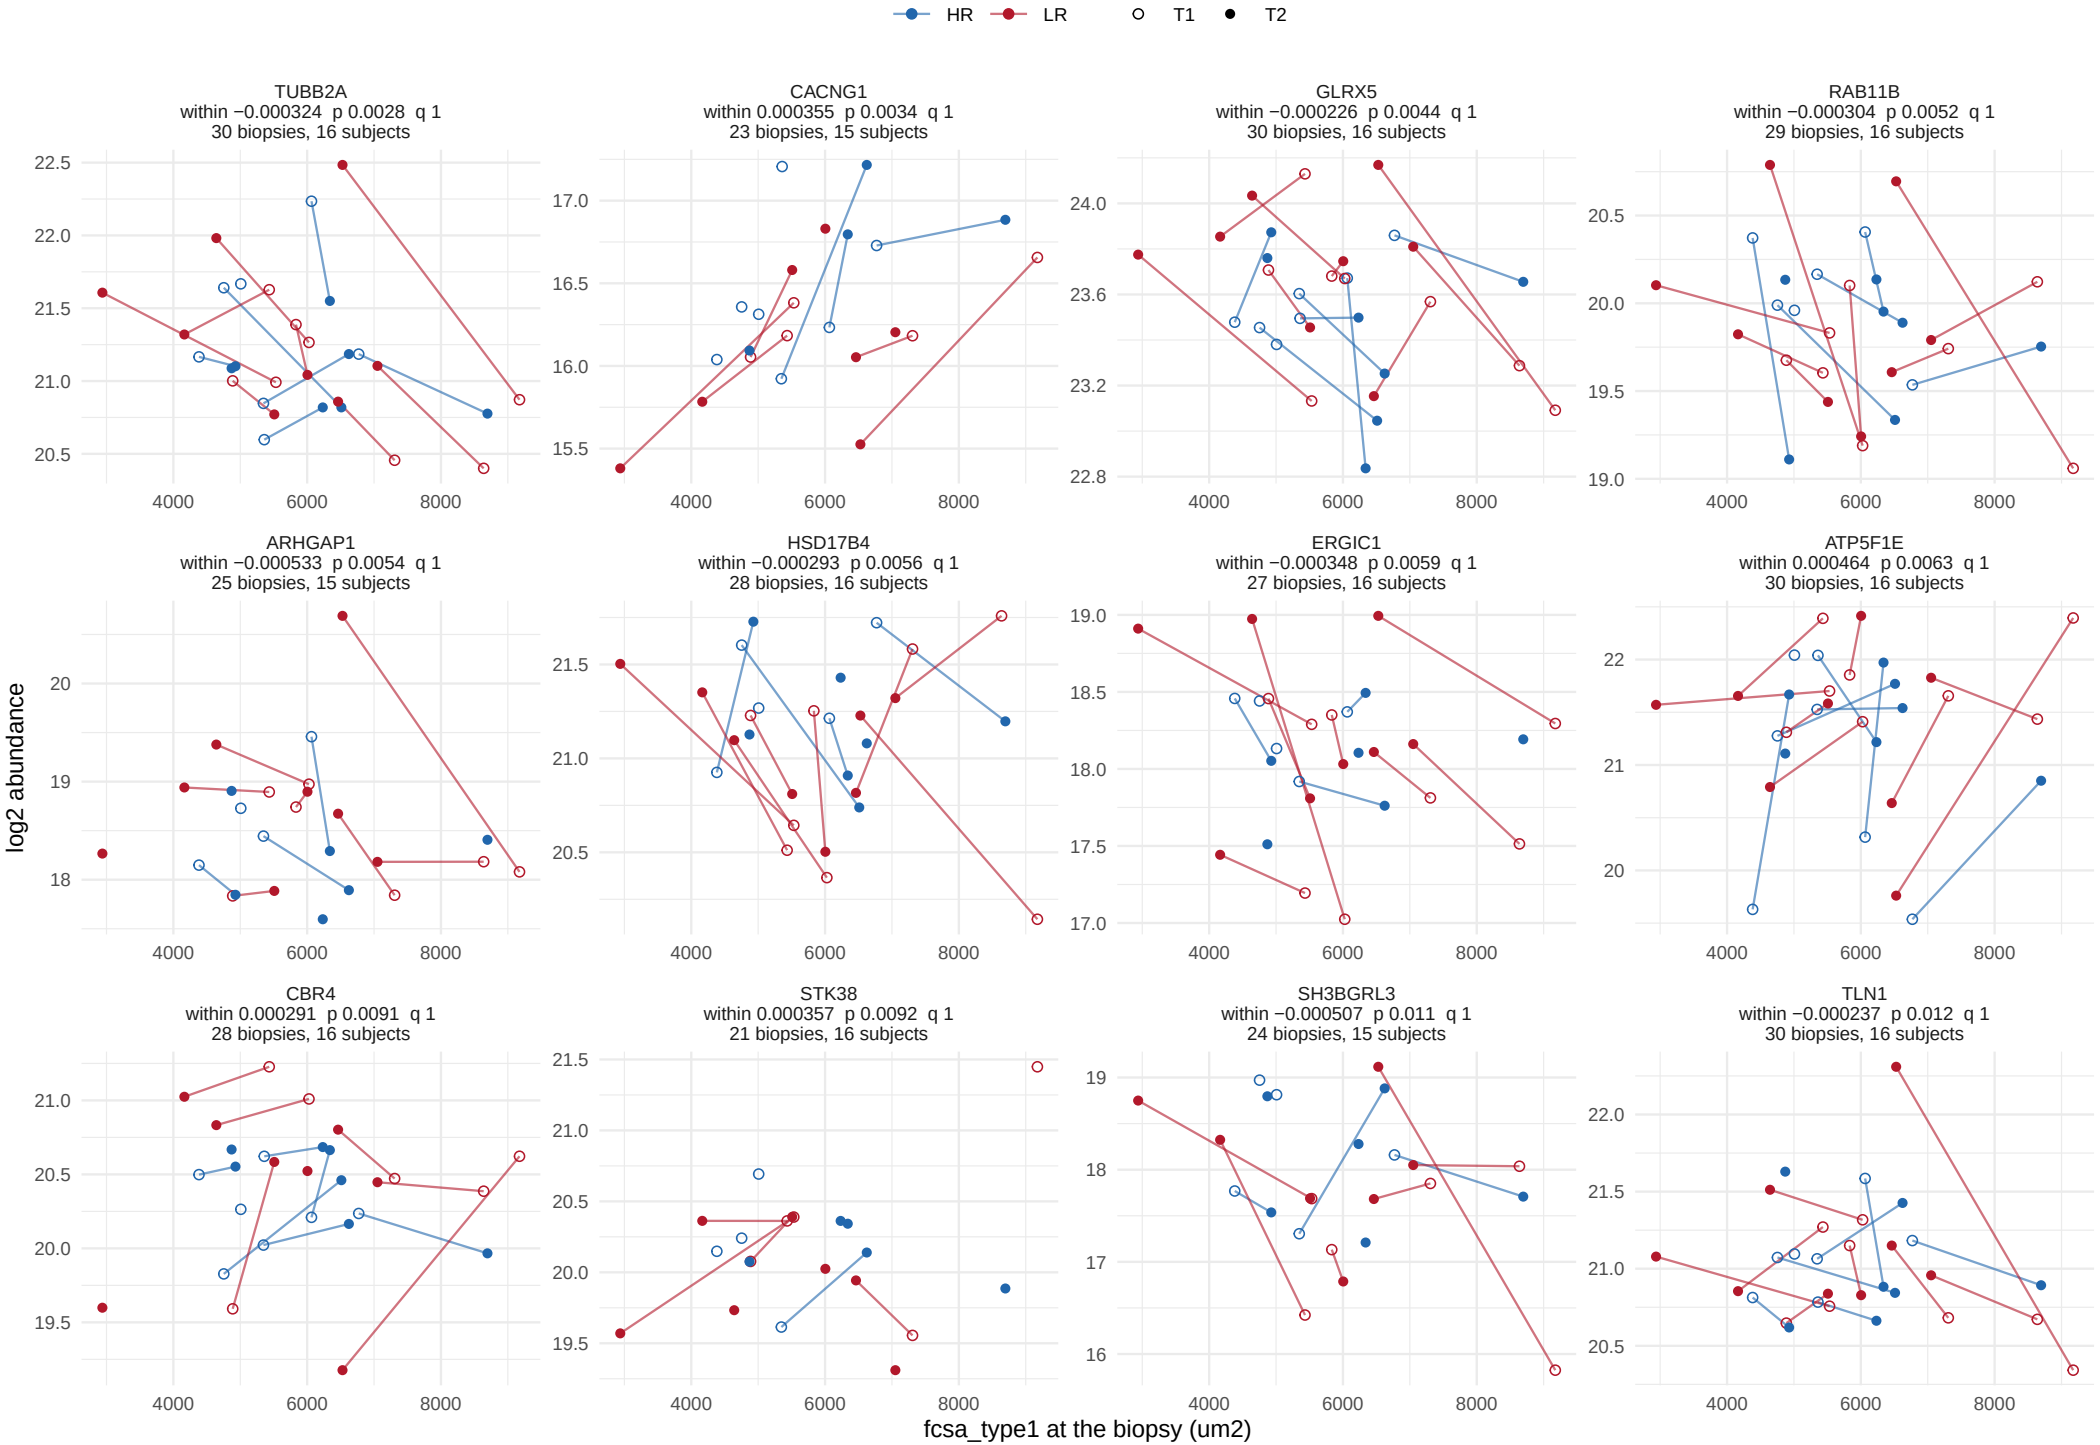

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_type1, within−person term


63 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 2 of 6.

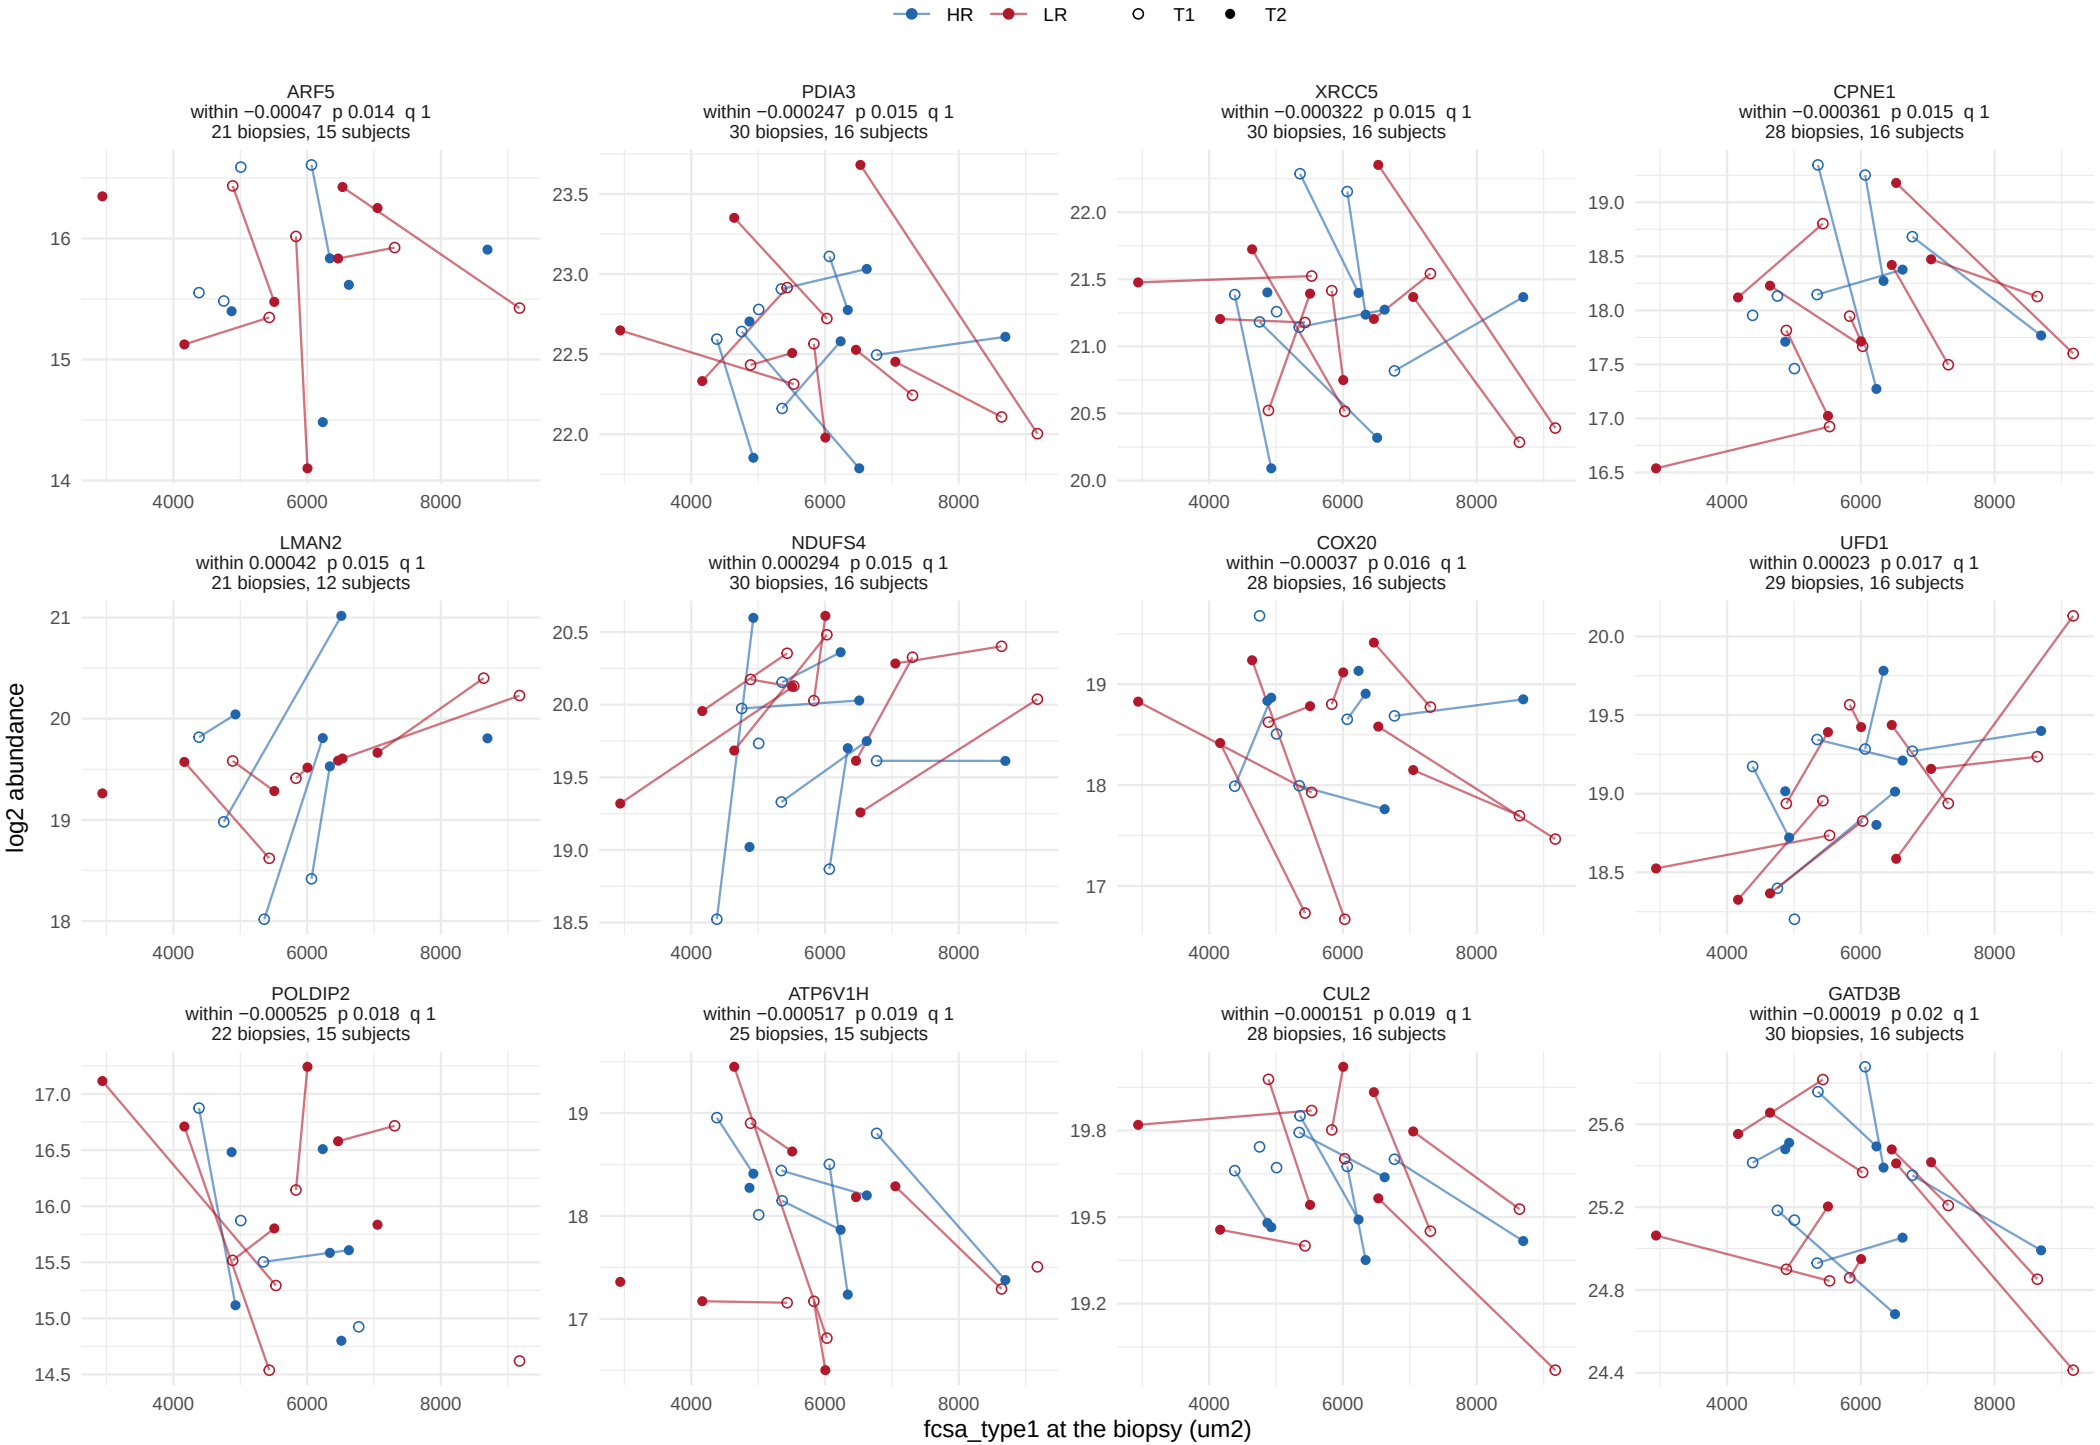

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_type1, within−person term


63 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 3 of 6.

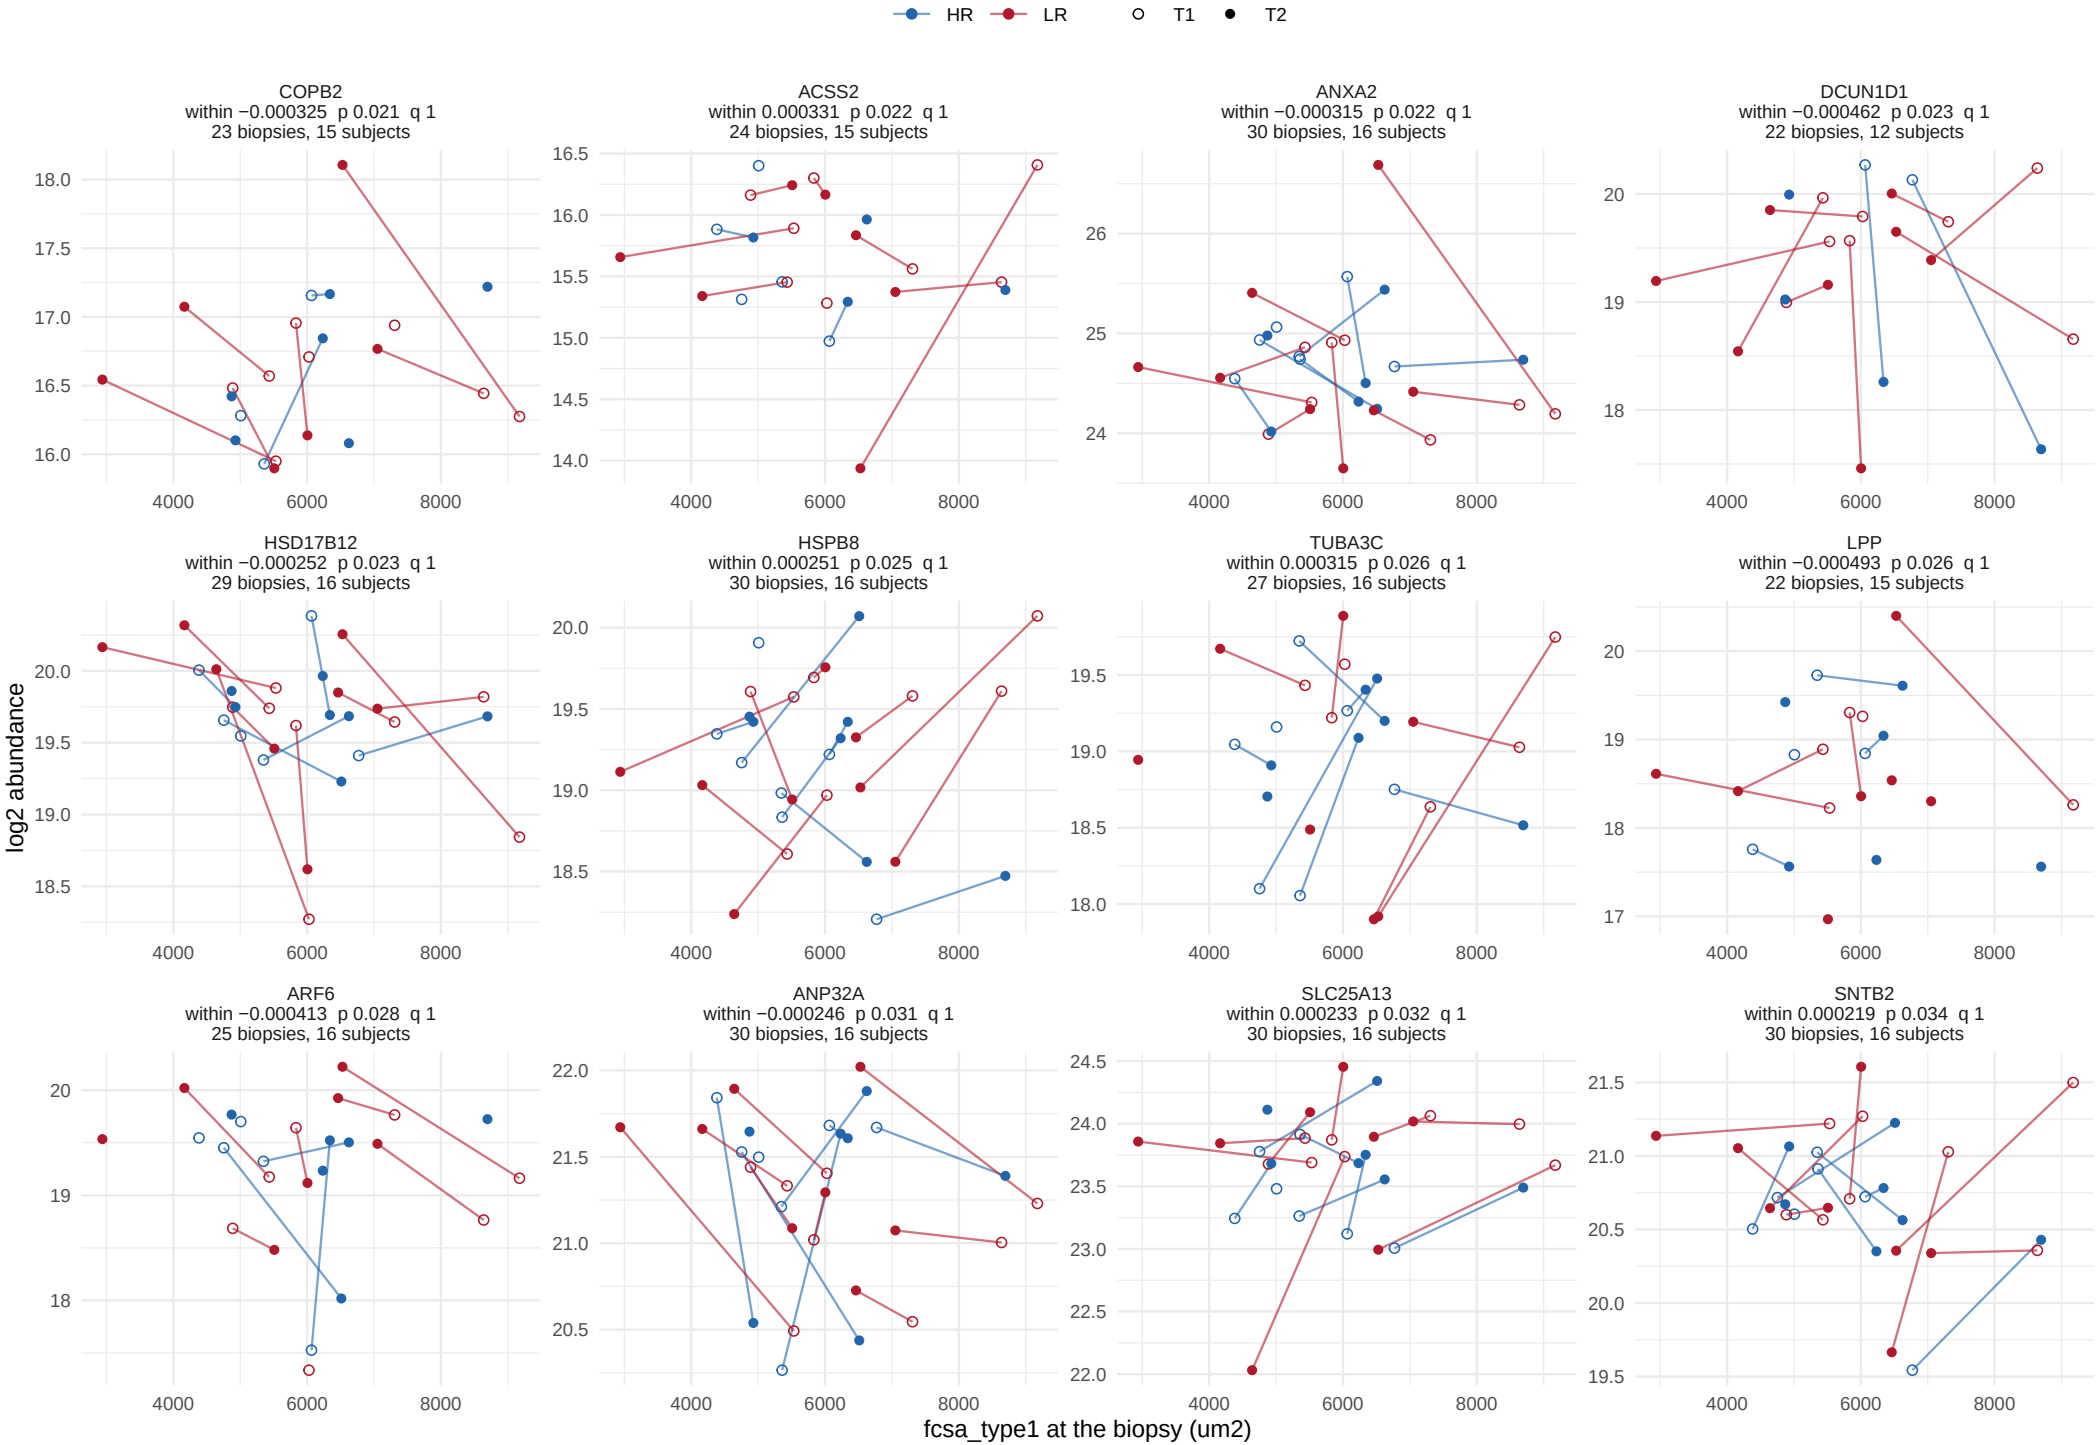

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_type1, within−person term


63 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 4 of 6.

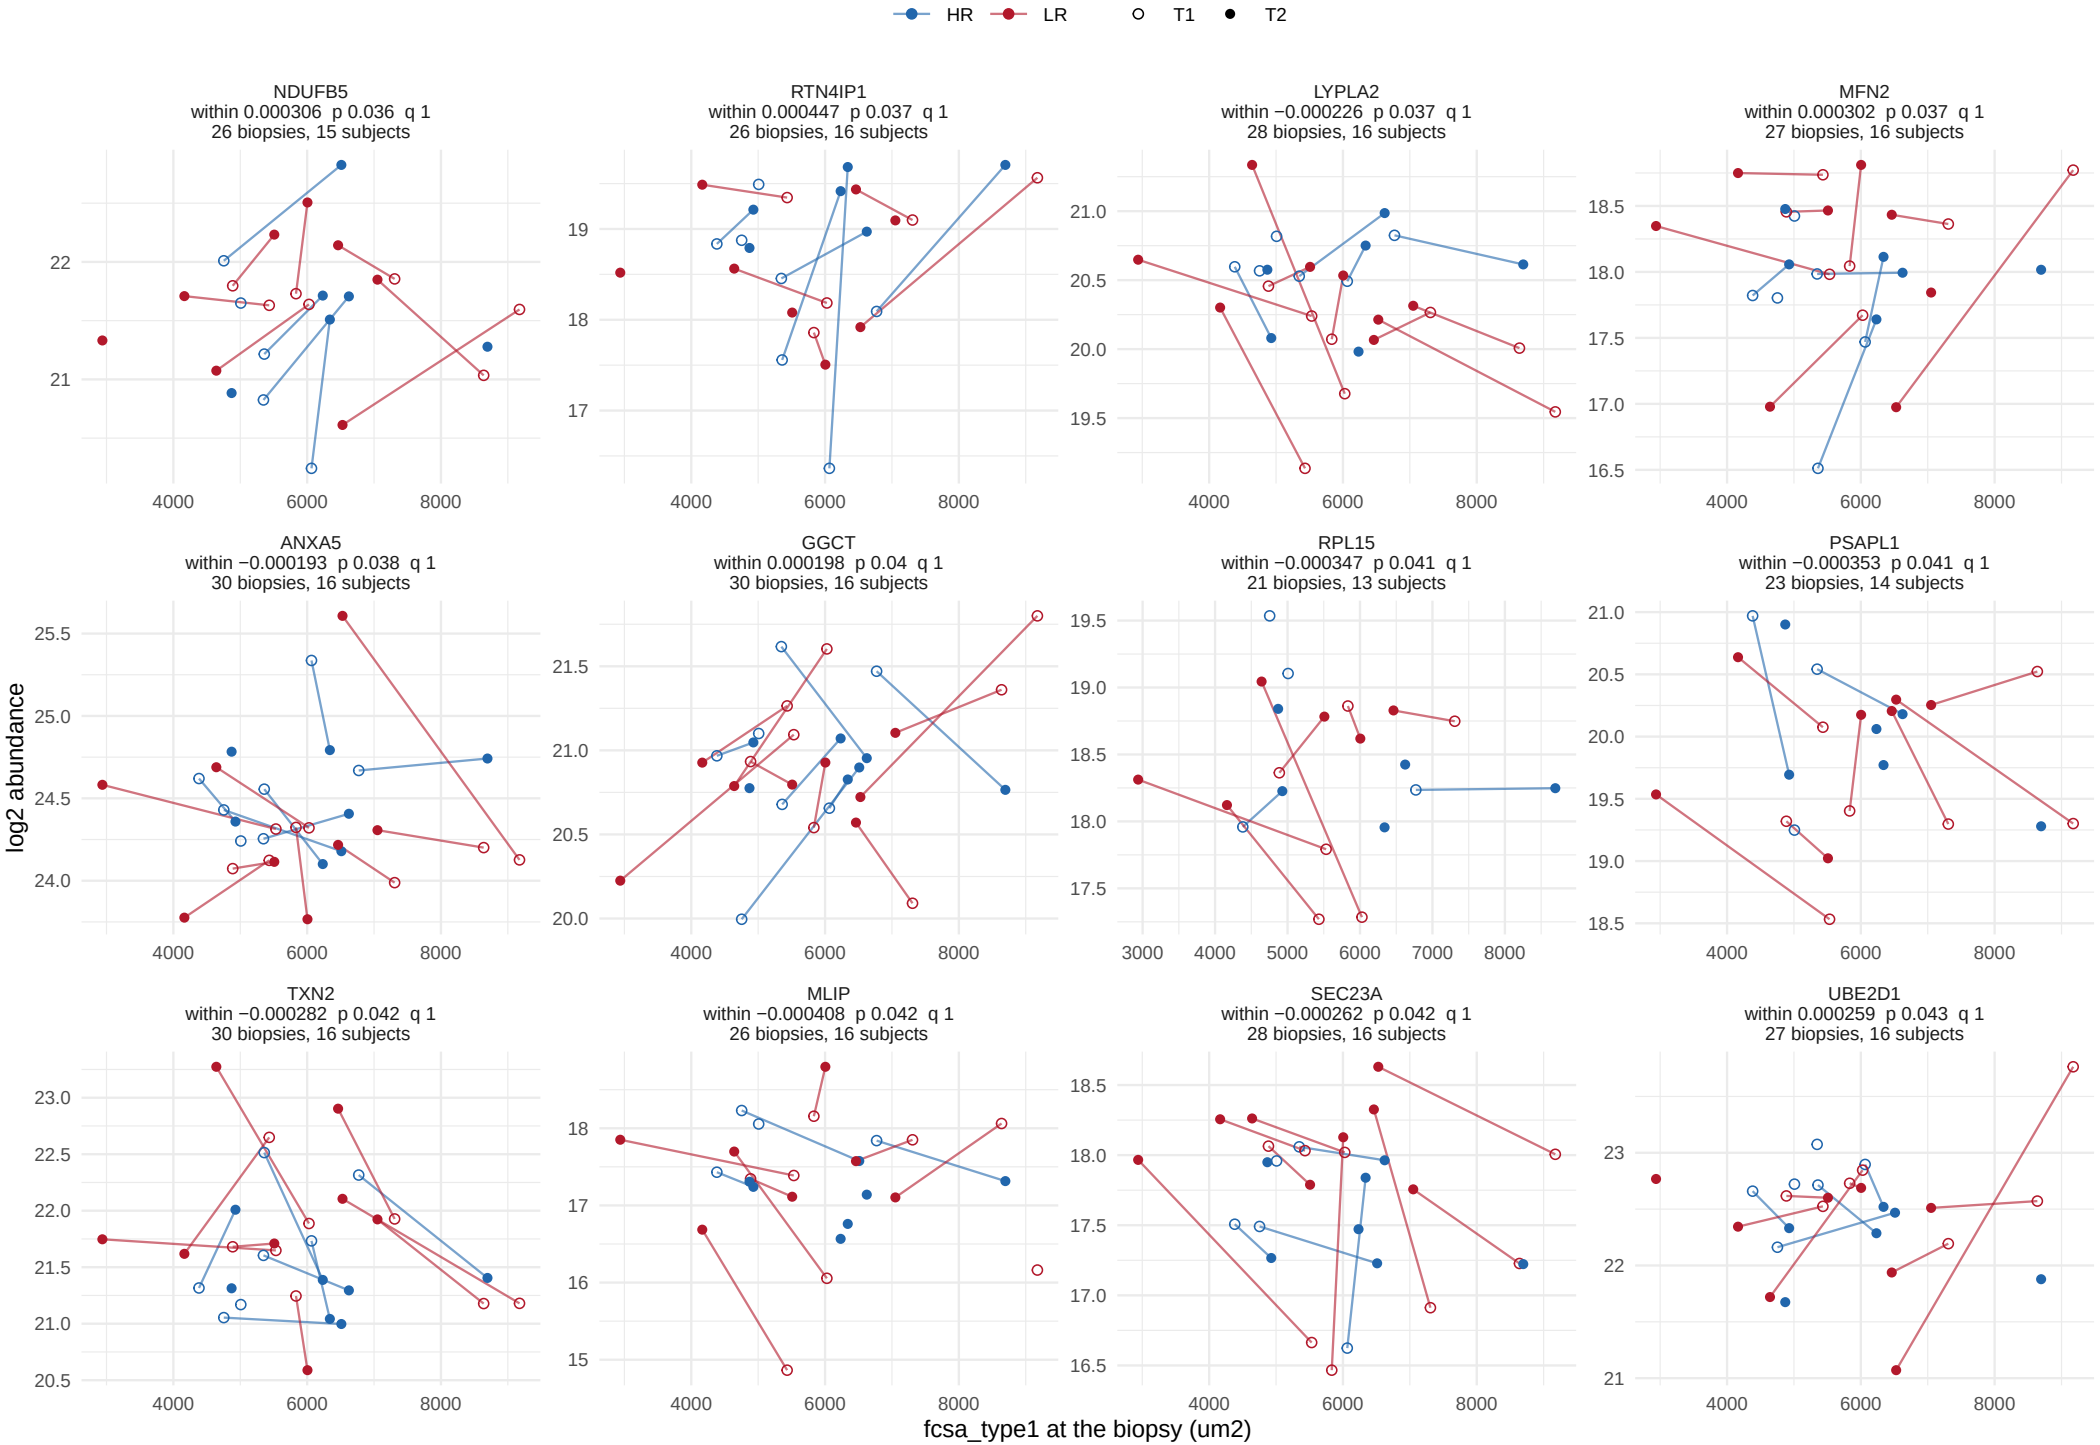

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_type1, within−person term

63 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 5 of 6.

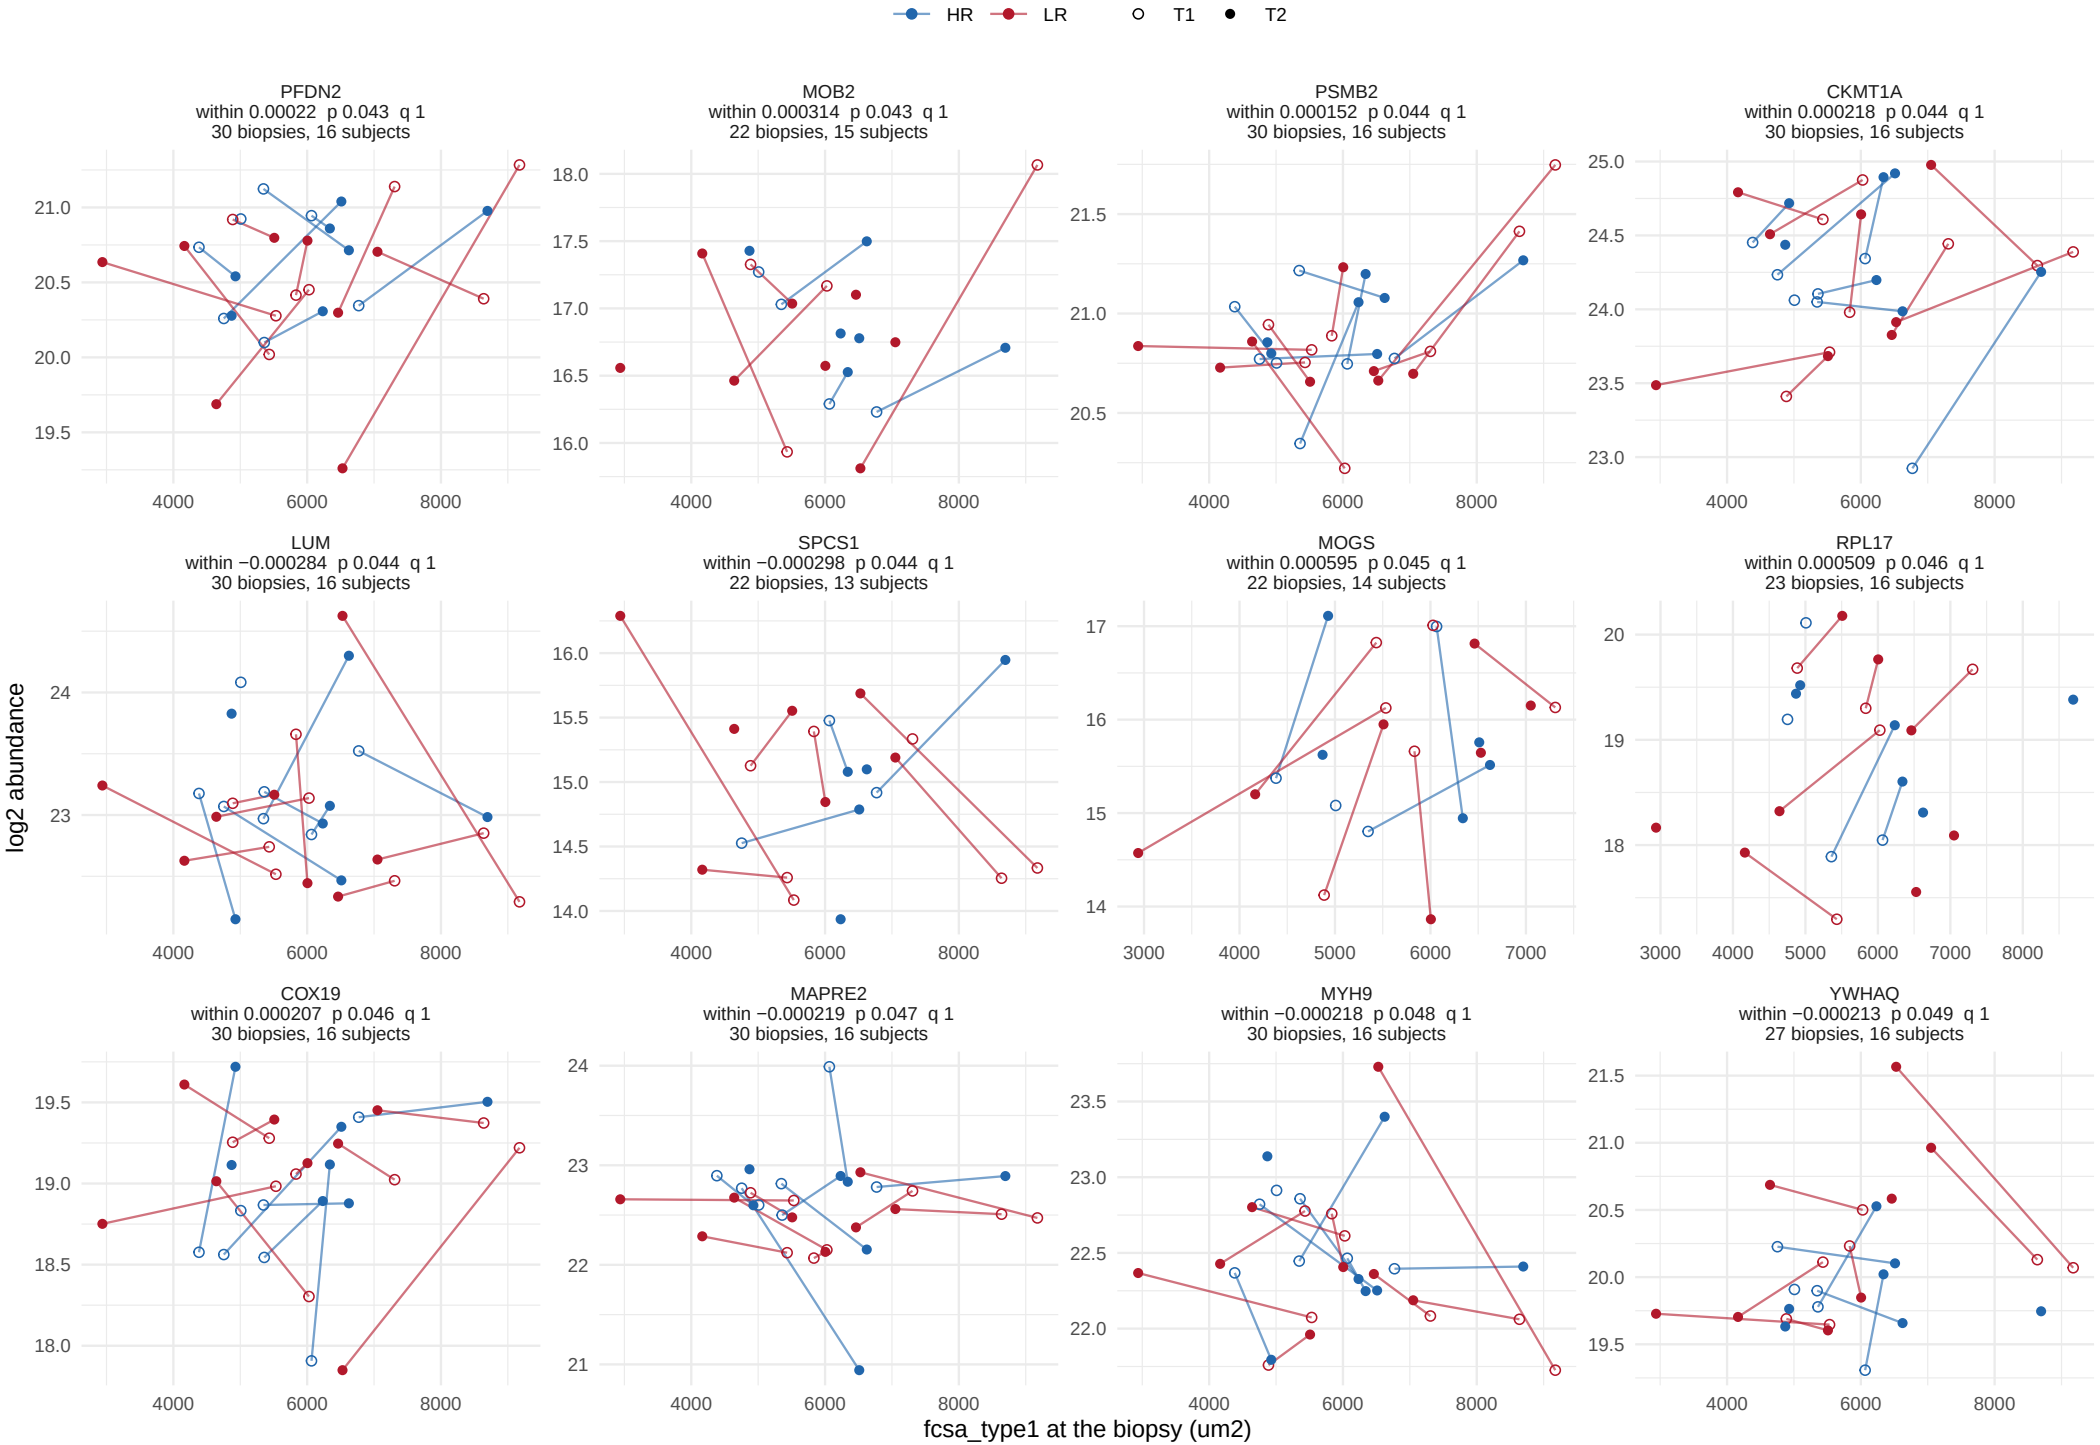

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_type1, within−person term


63 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 6 of 6.



limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_type1, between−person term


67 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 1 of 6.

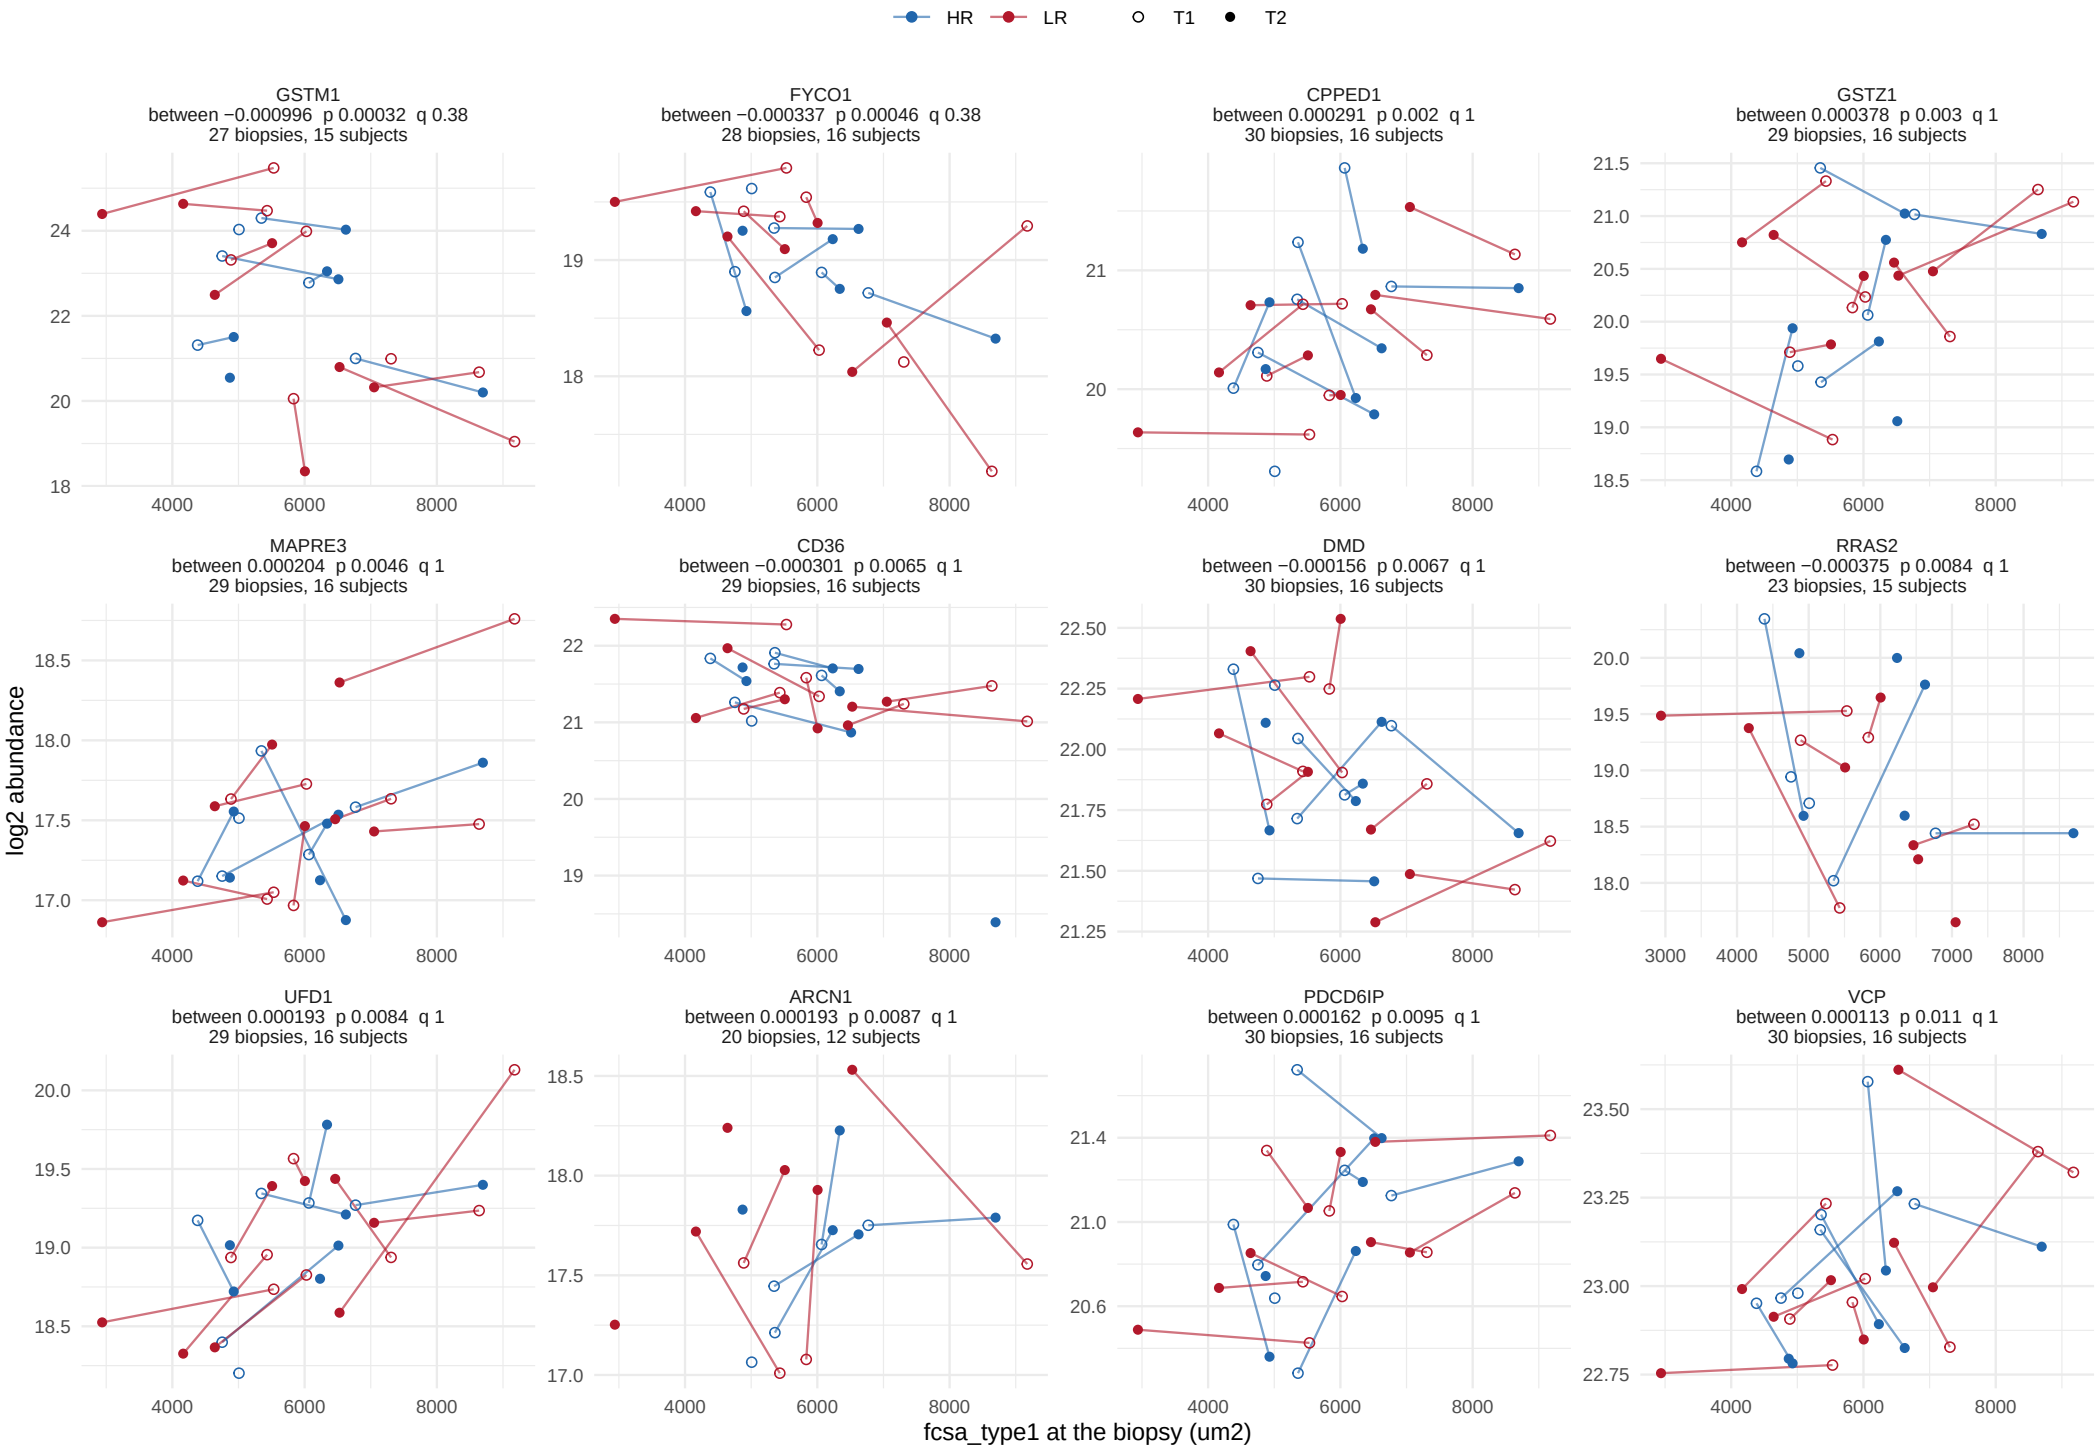

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_type1, between−person term


67 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 2 of 6.

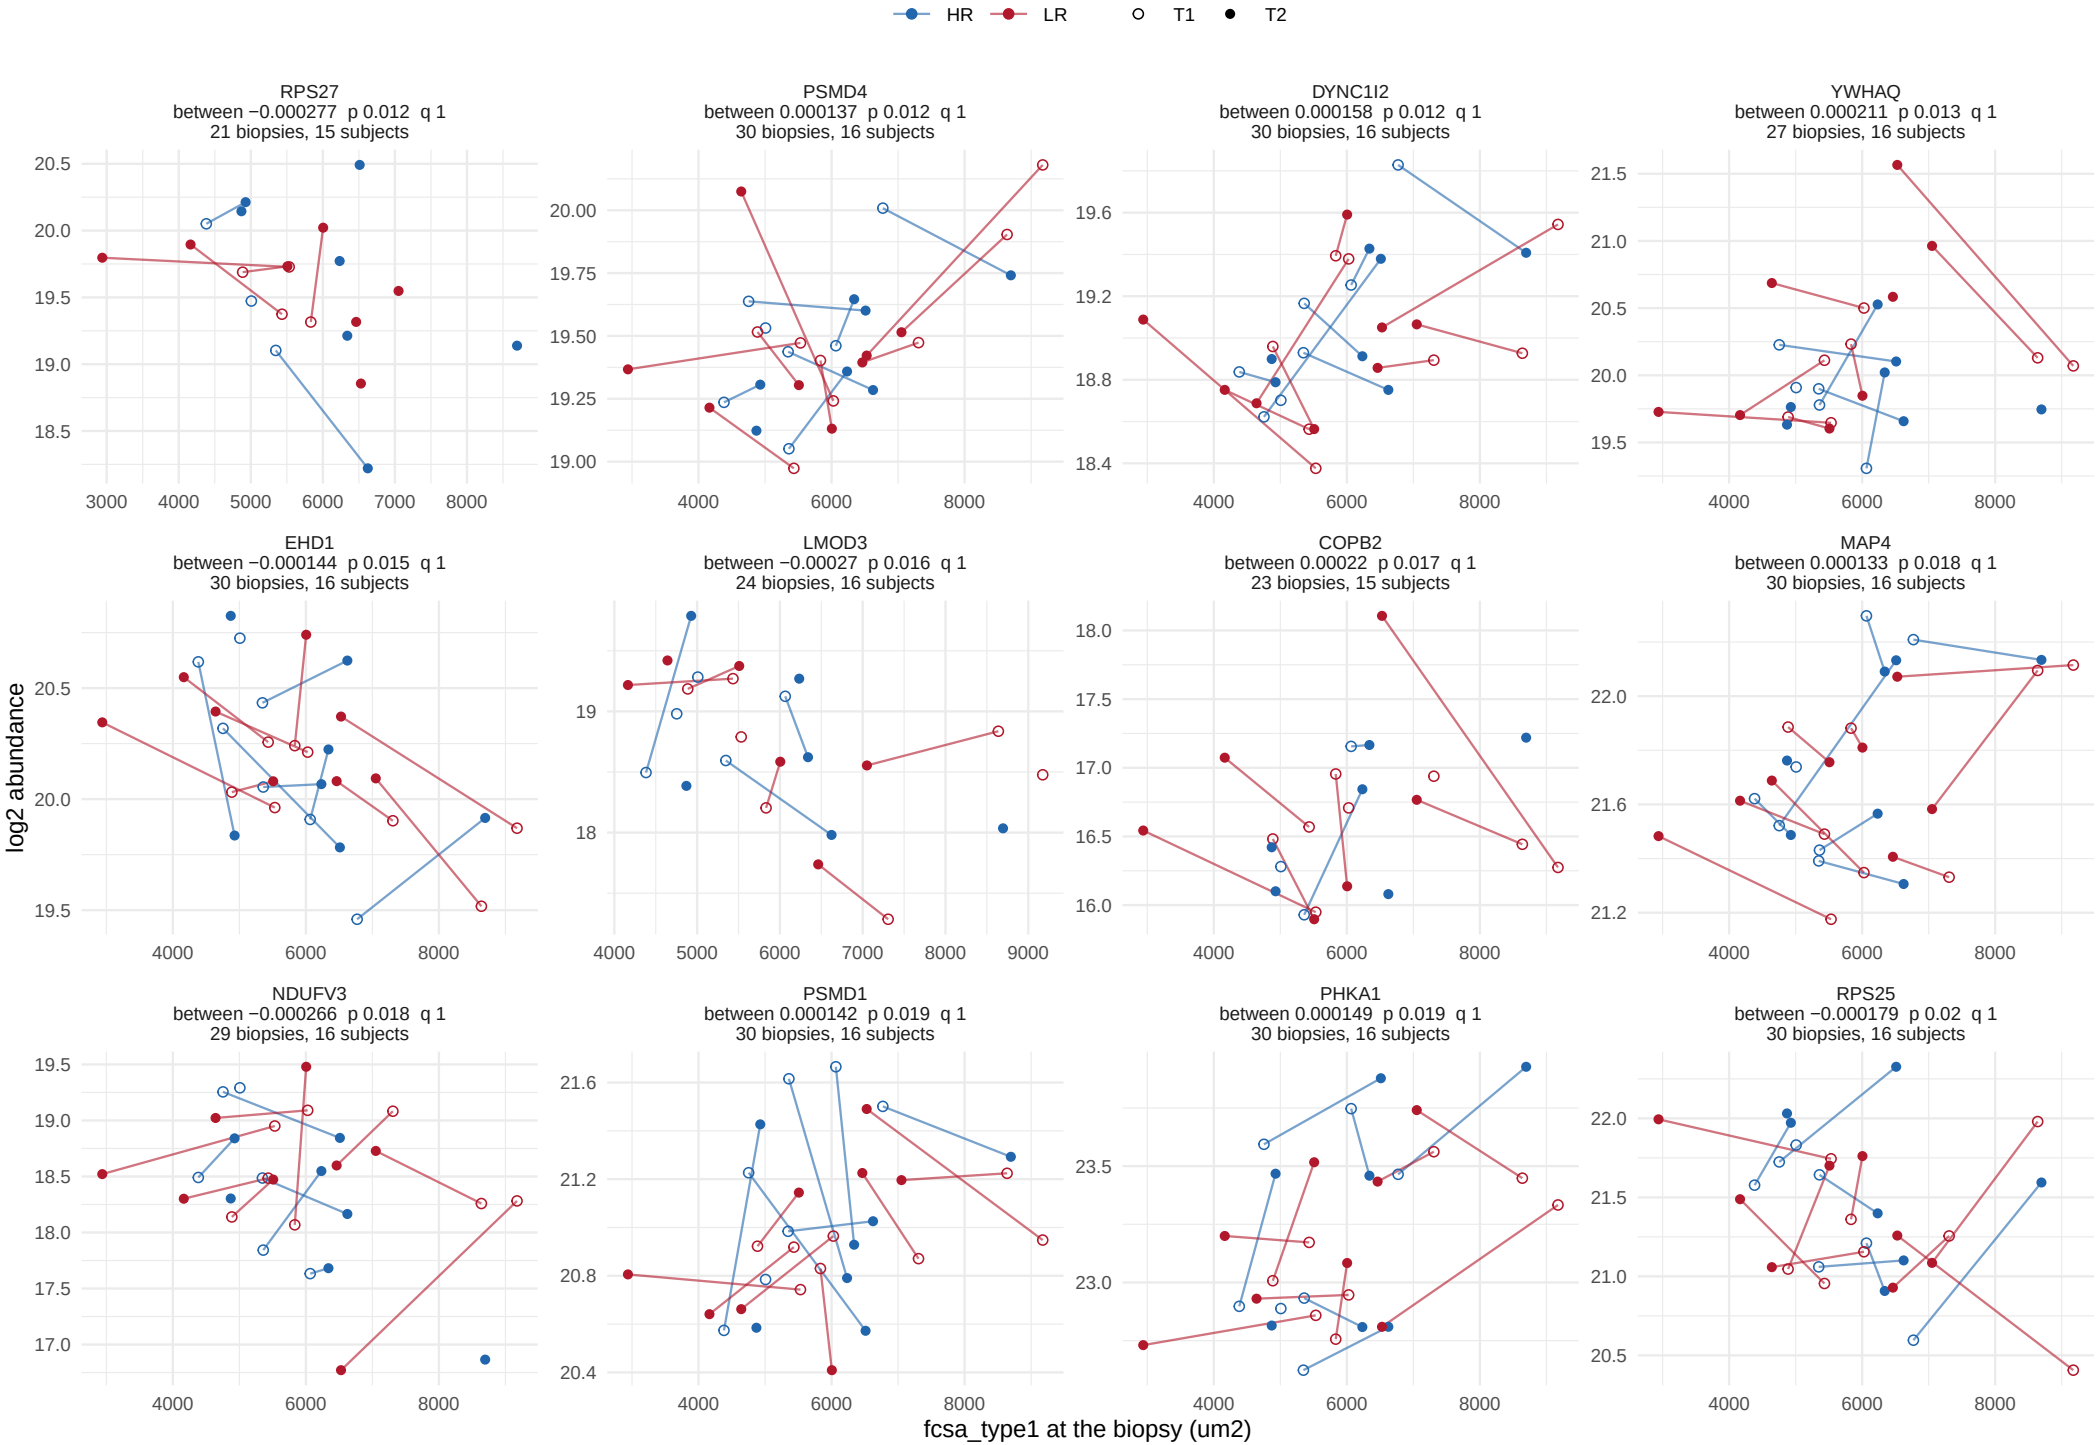

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_type1, between−person term


67 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 3 of 6.

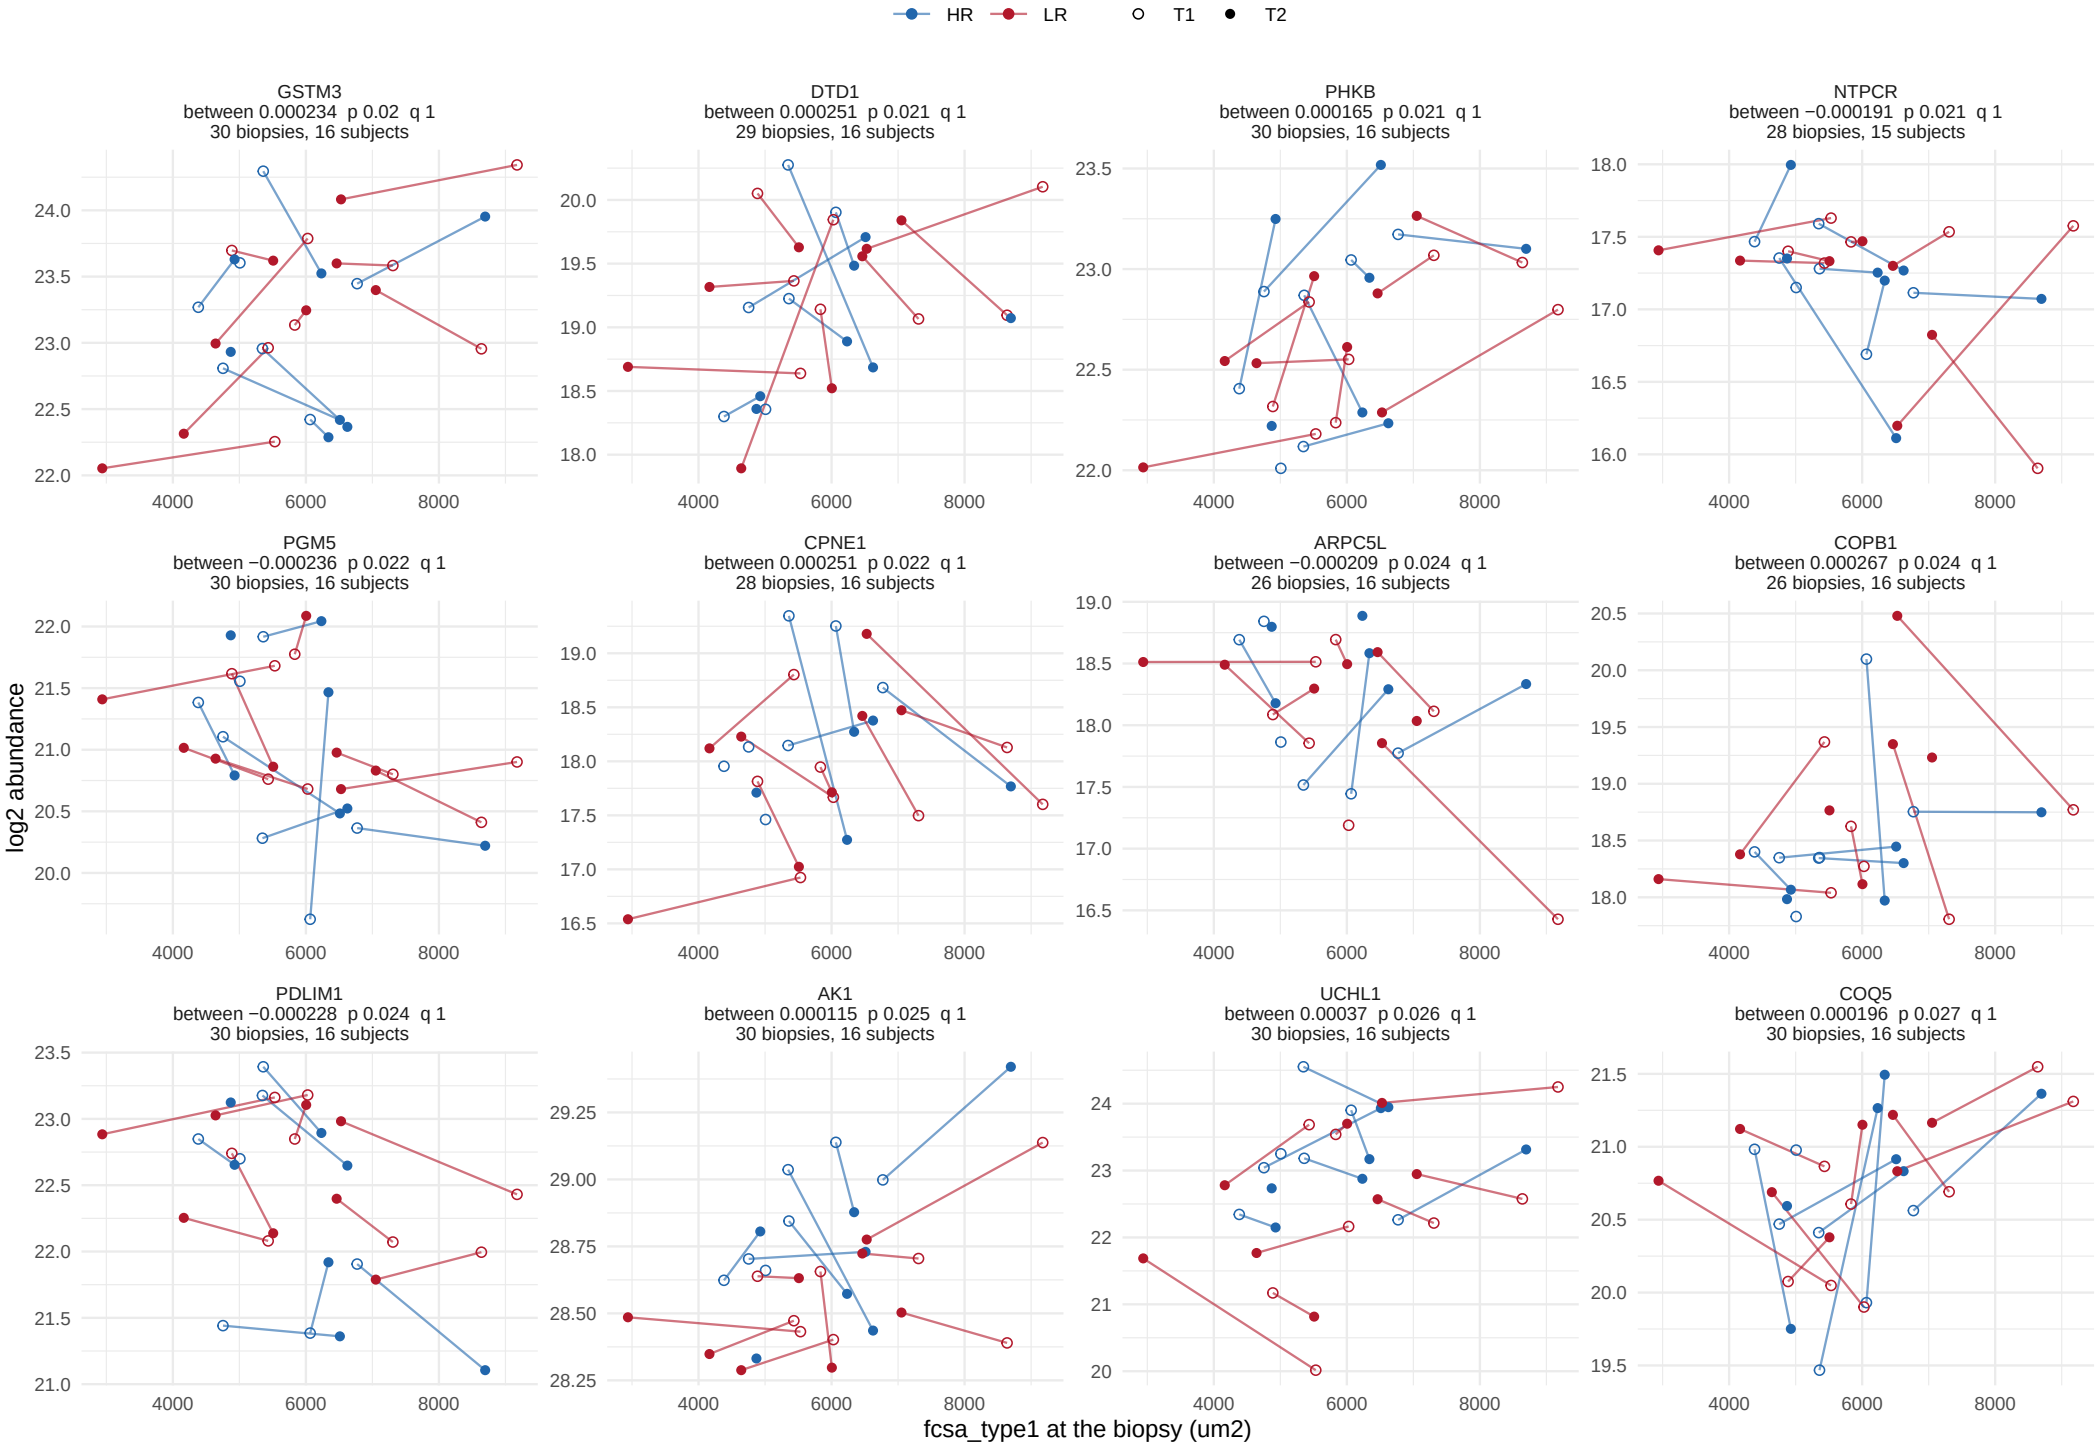

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_type1, between−person term


67 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 4 of 6.

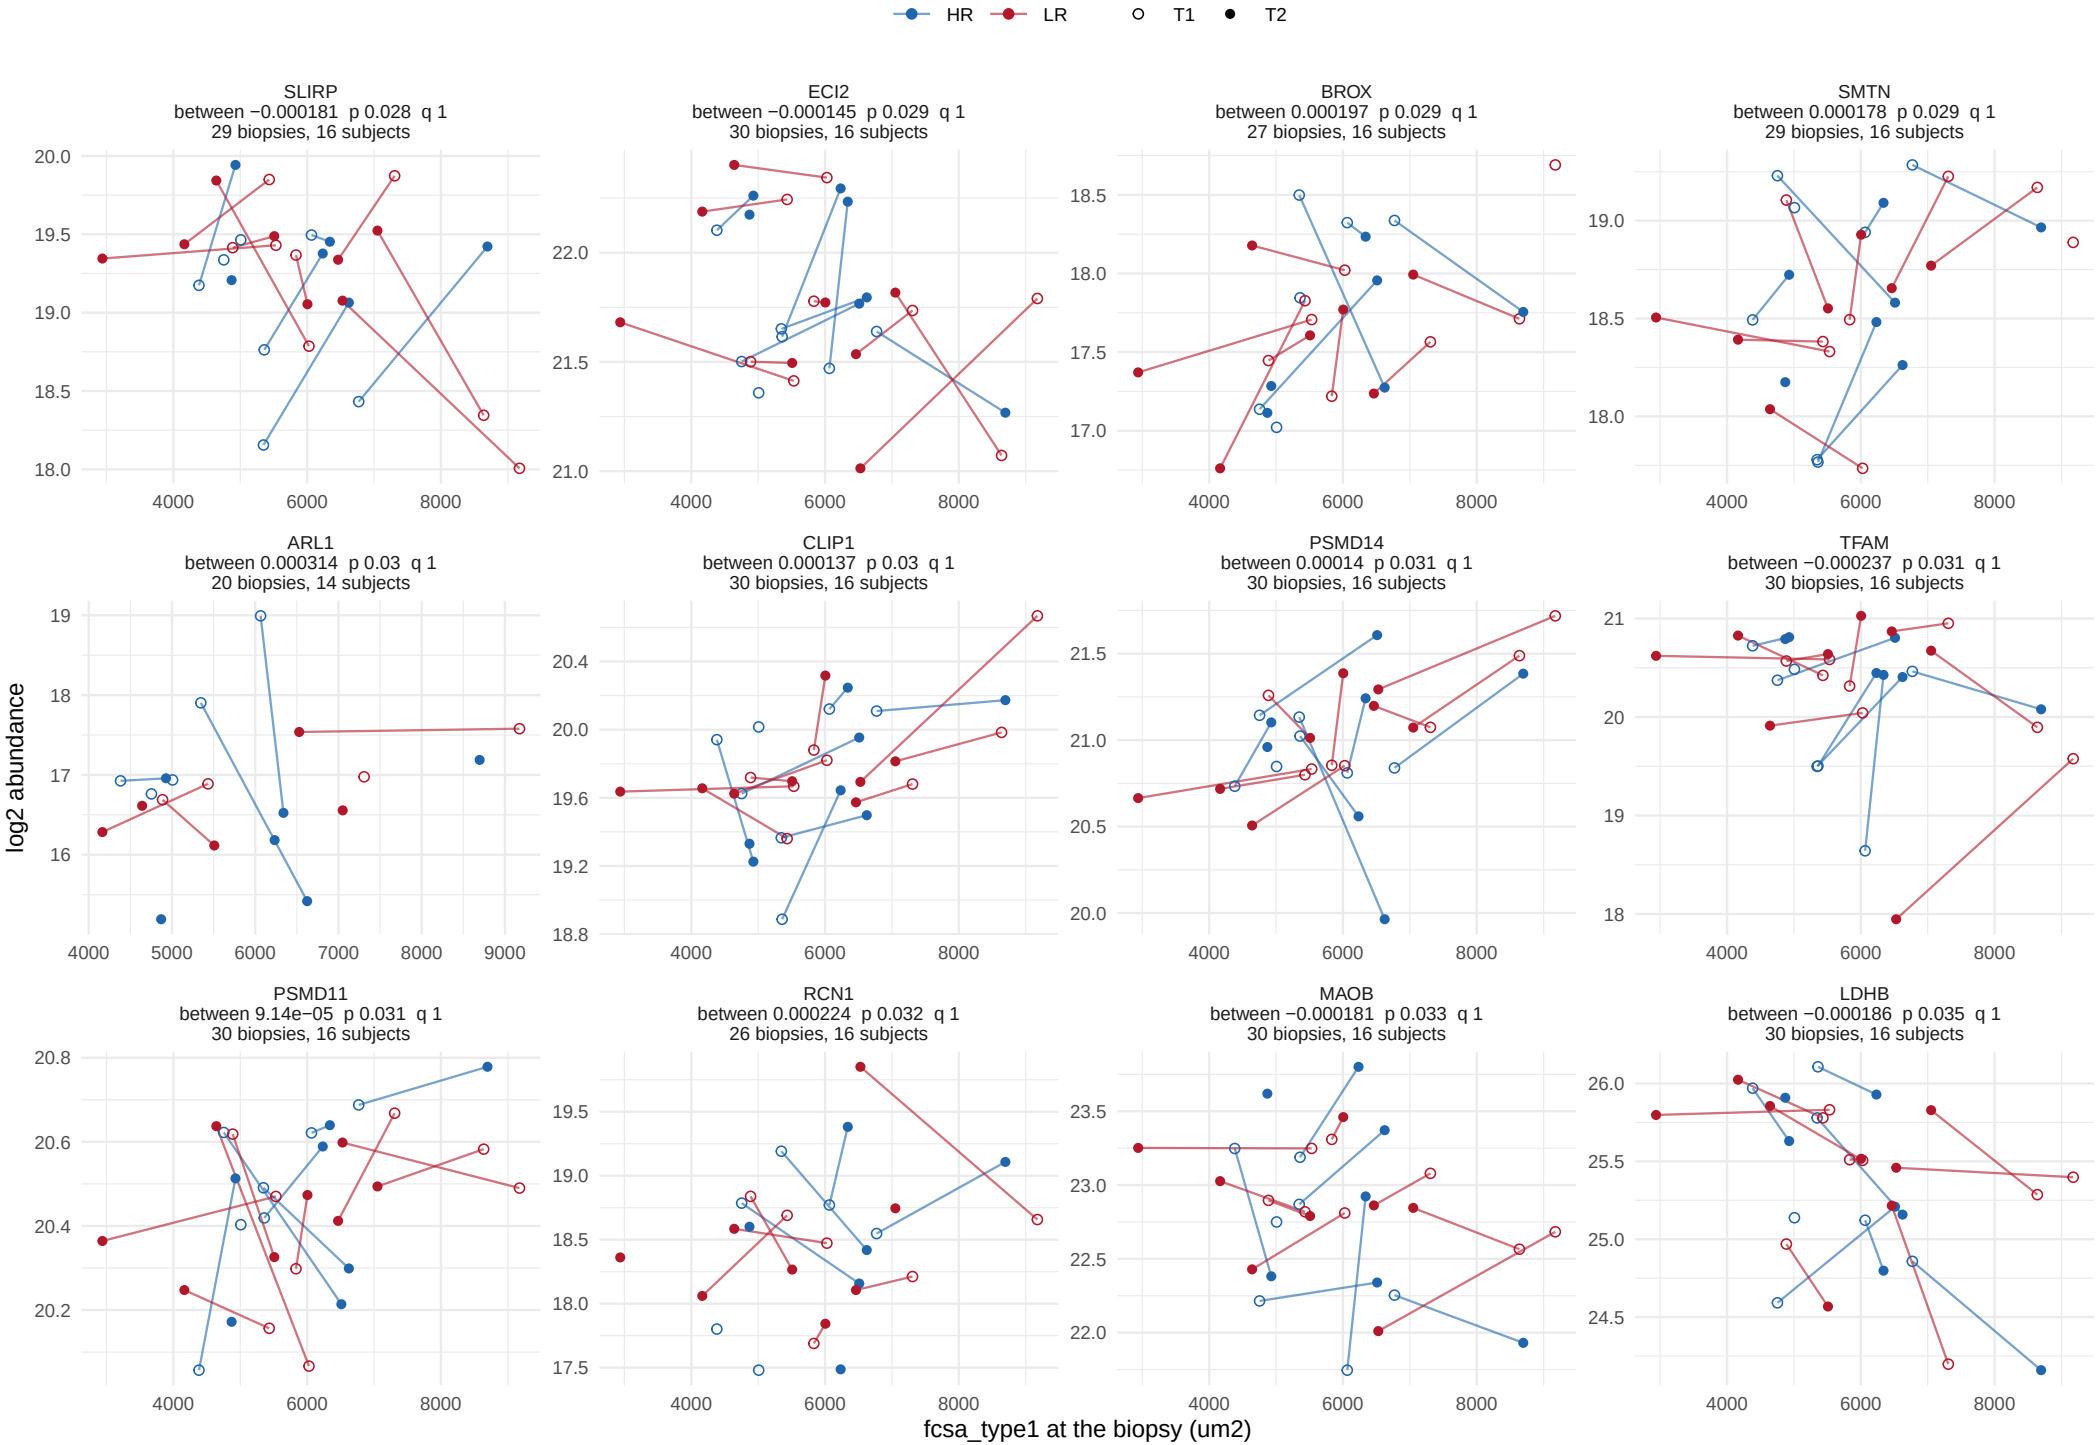

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_type1, between−person term


67 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 5 of 6.

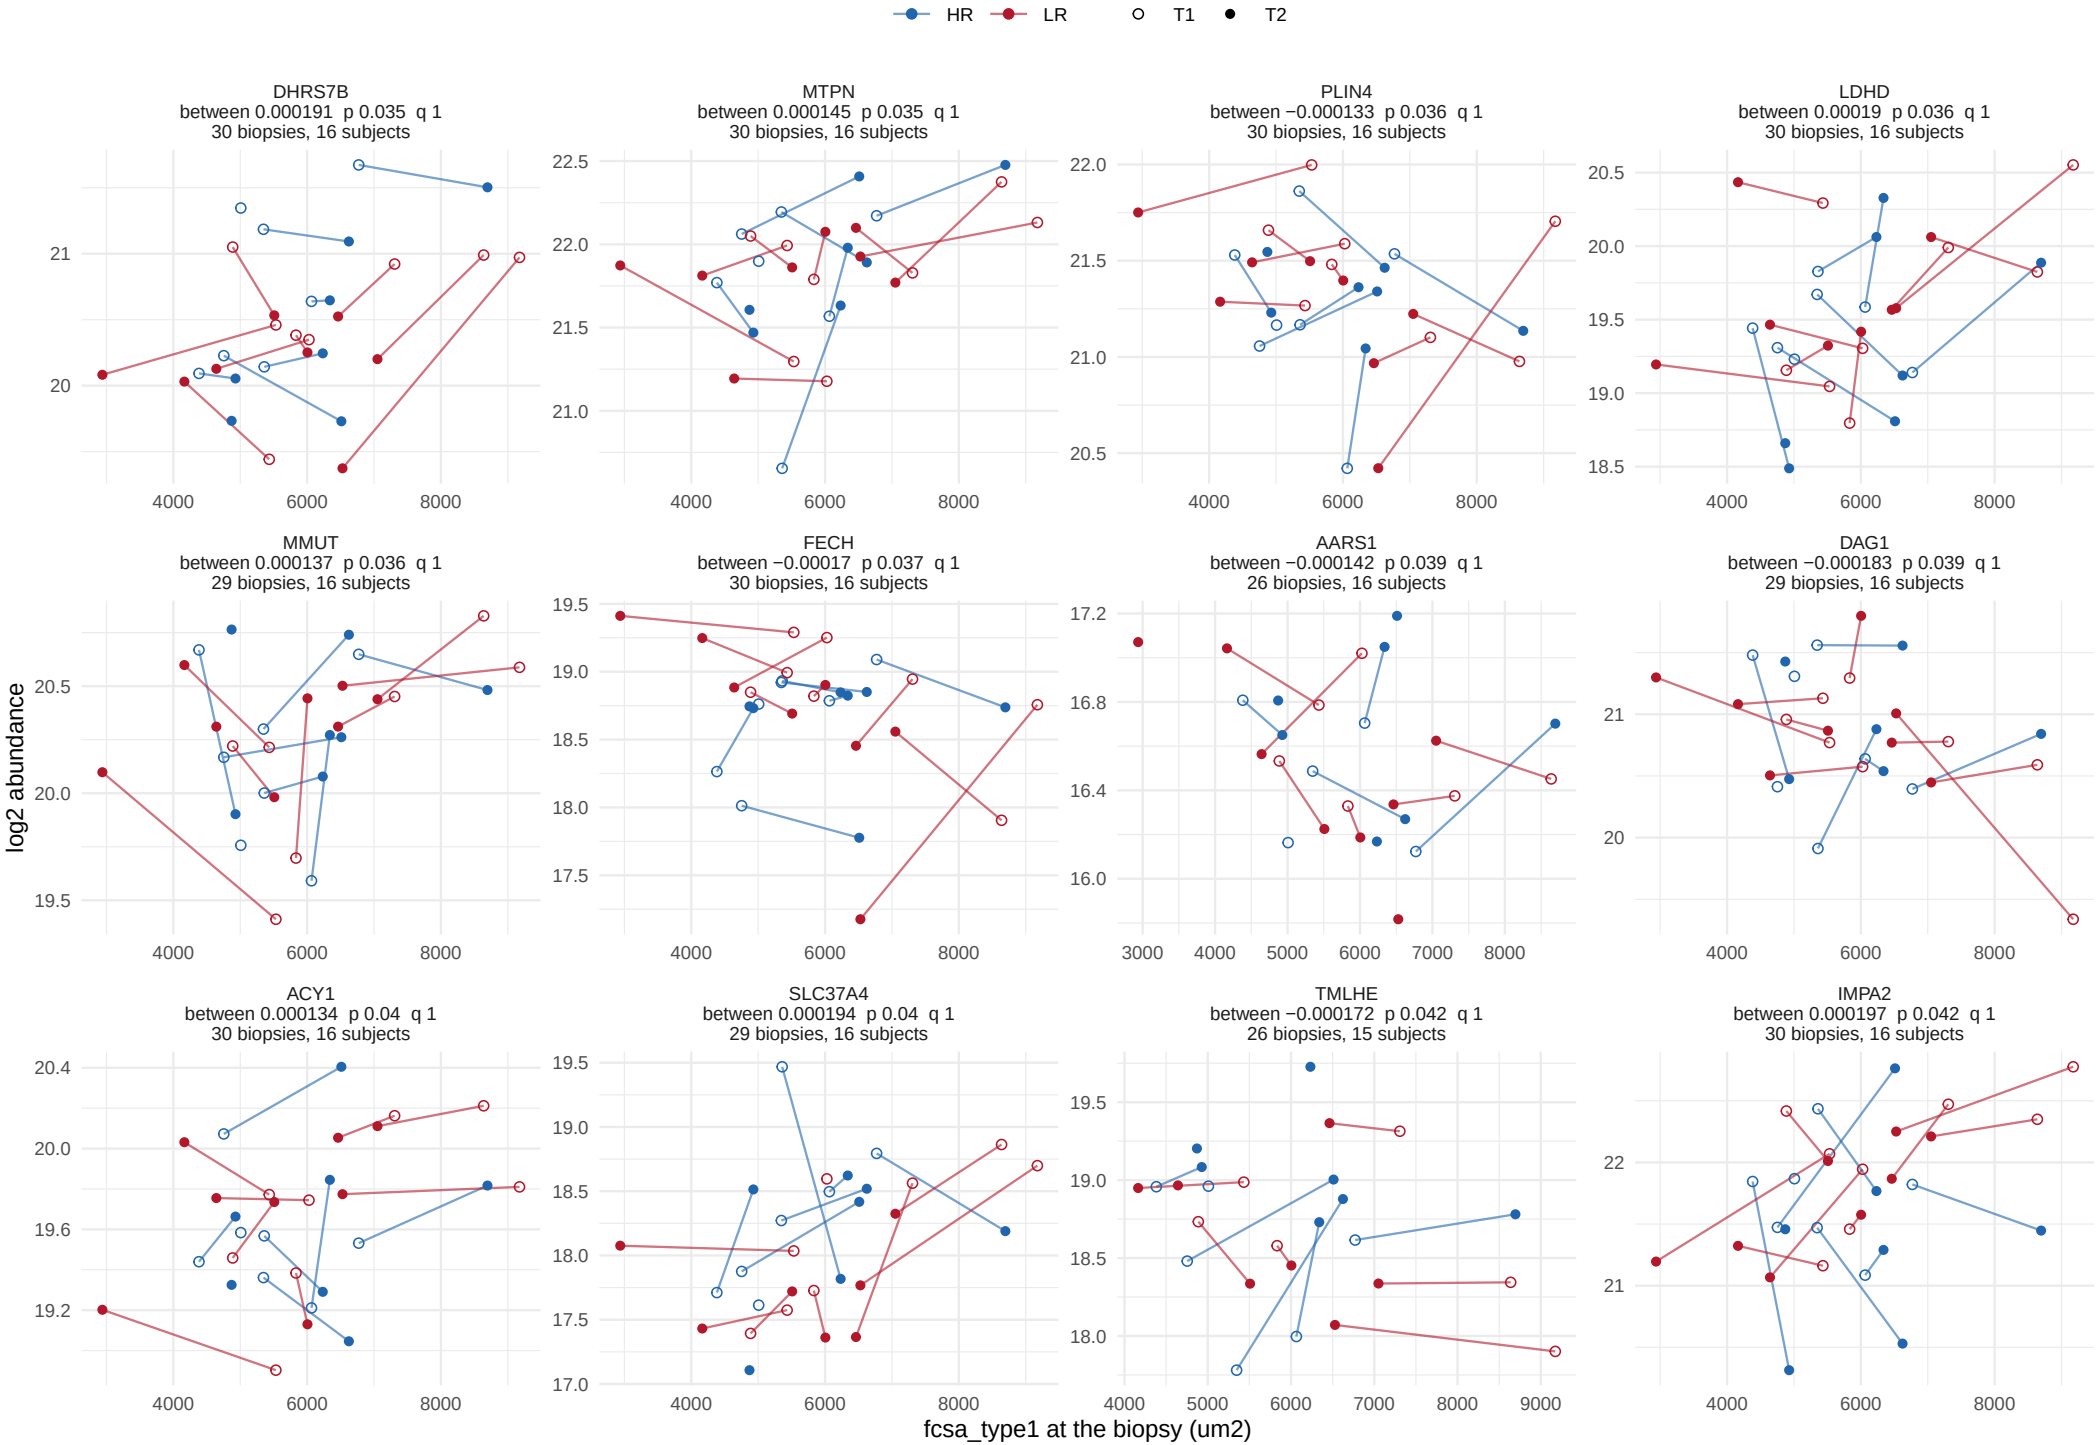

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_type1, between−person term


67 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 6 of 6.

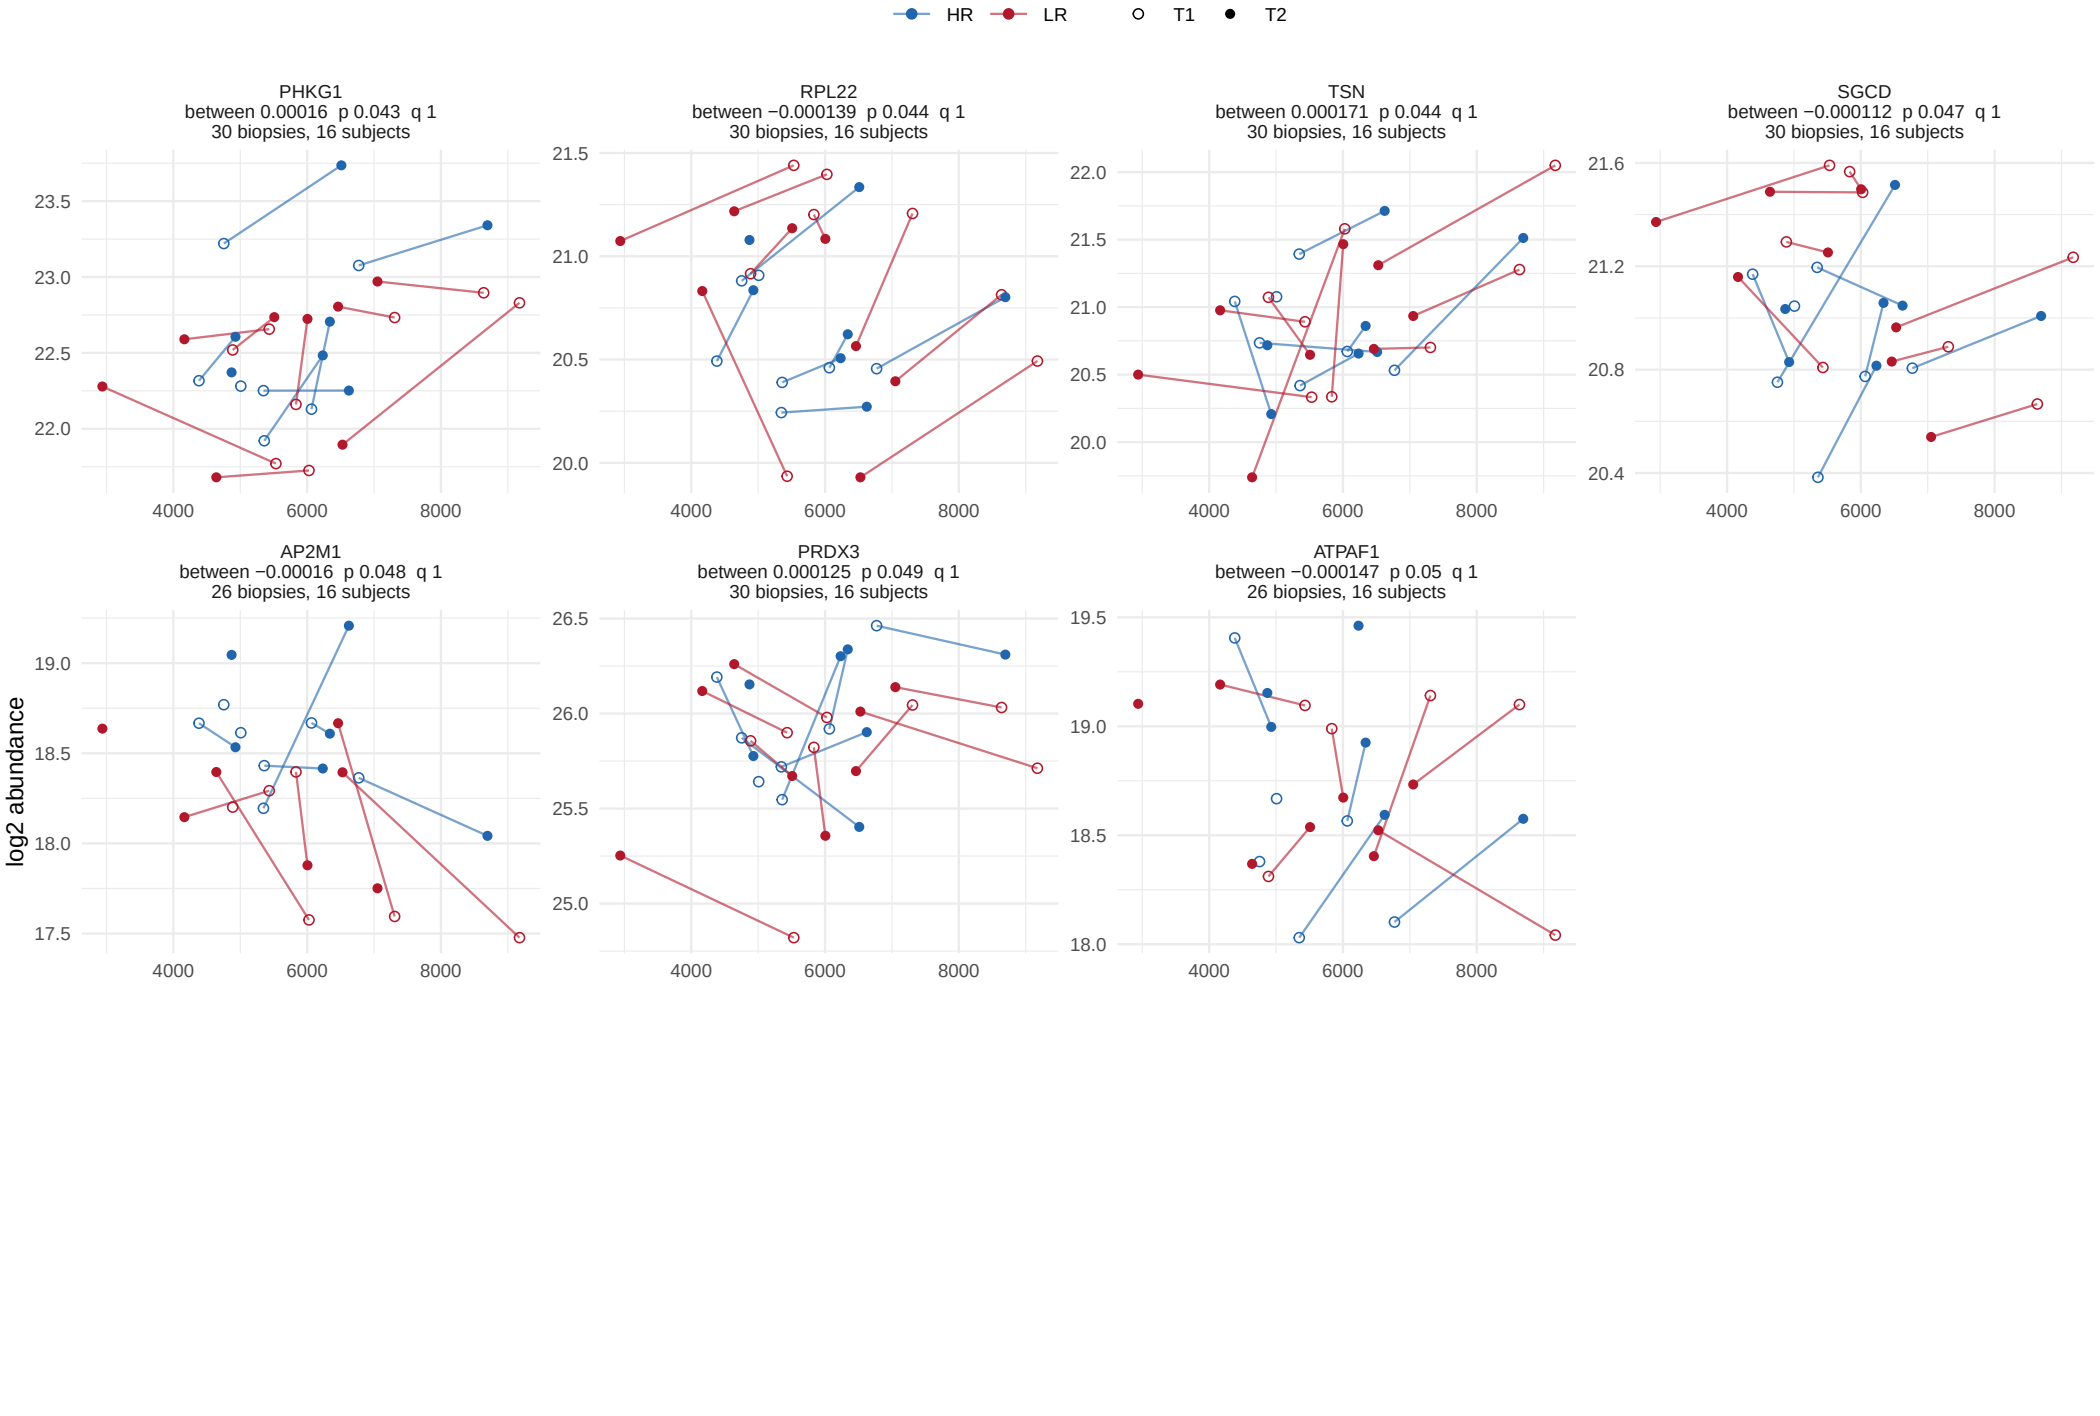

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_type2, within−person term


80 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 1 of 7.

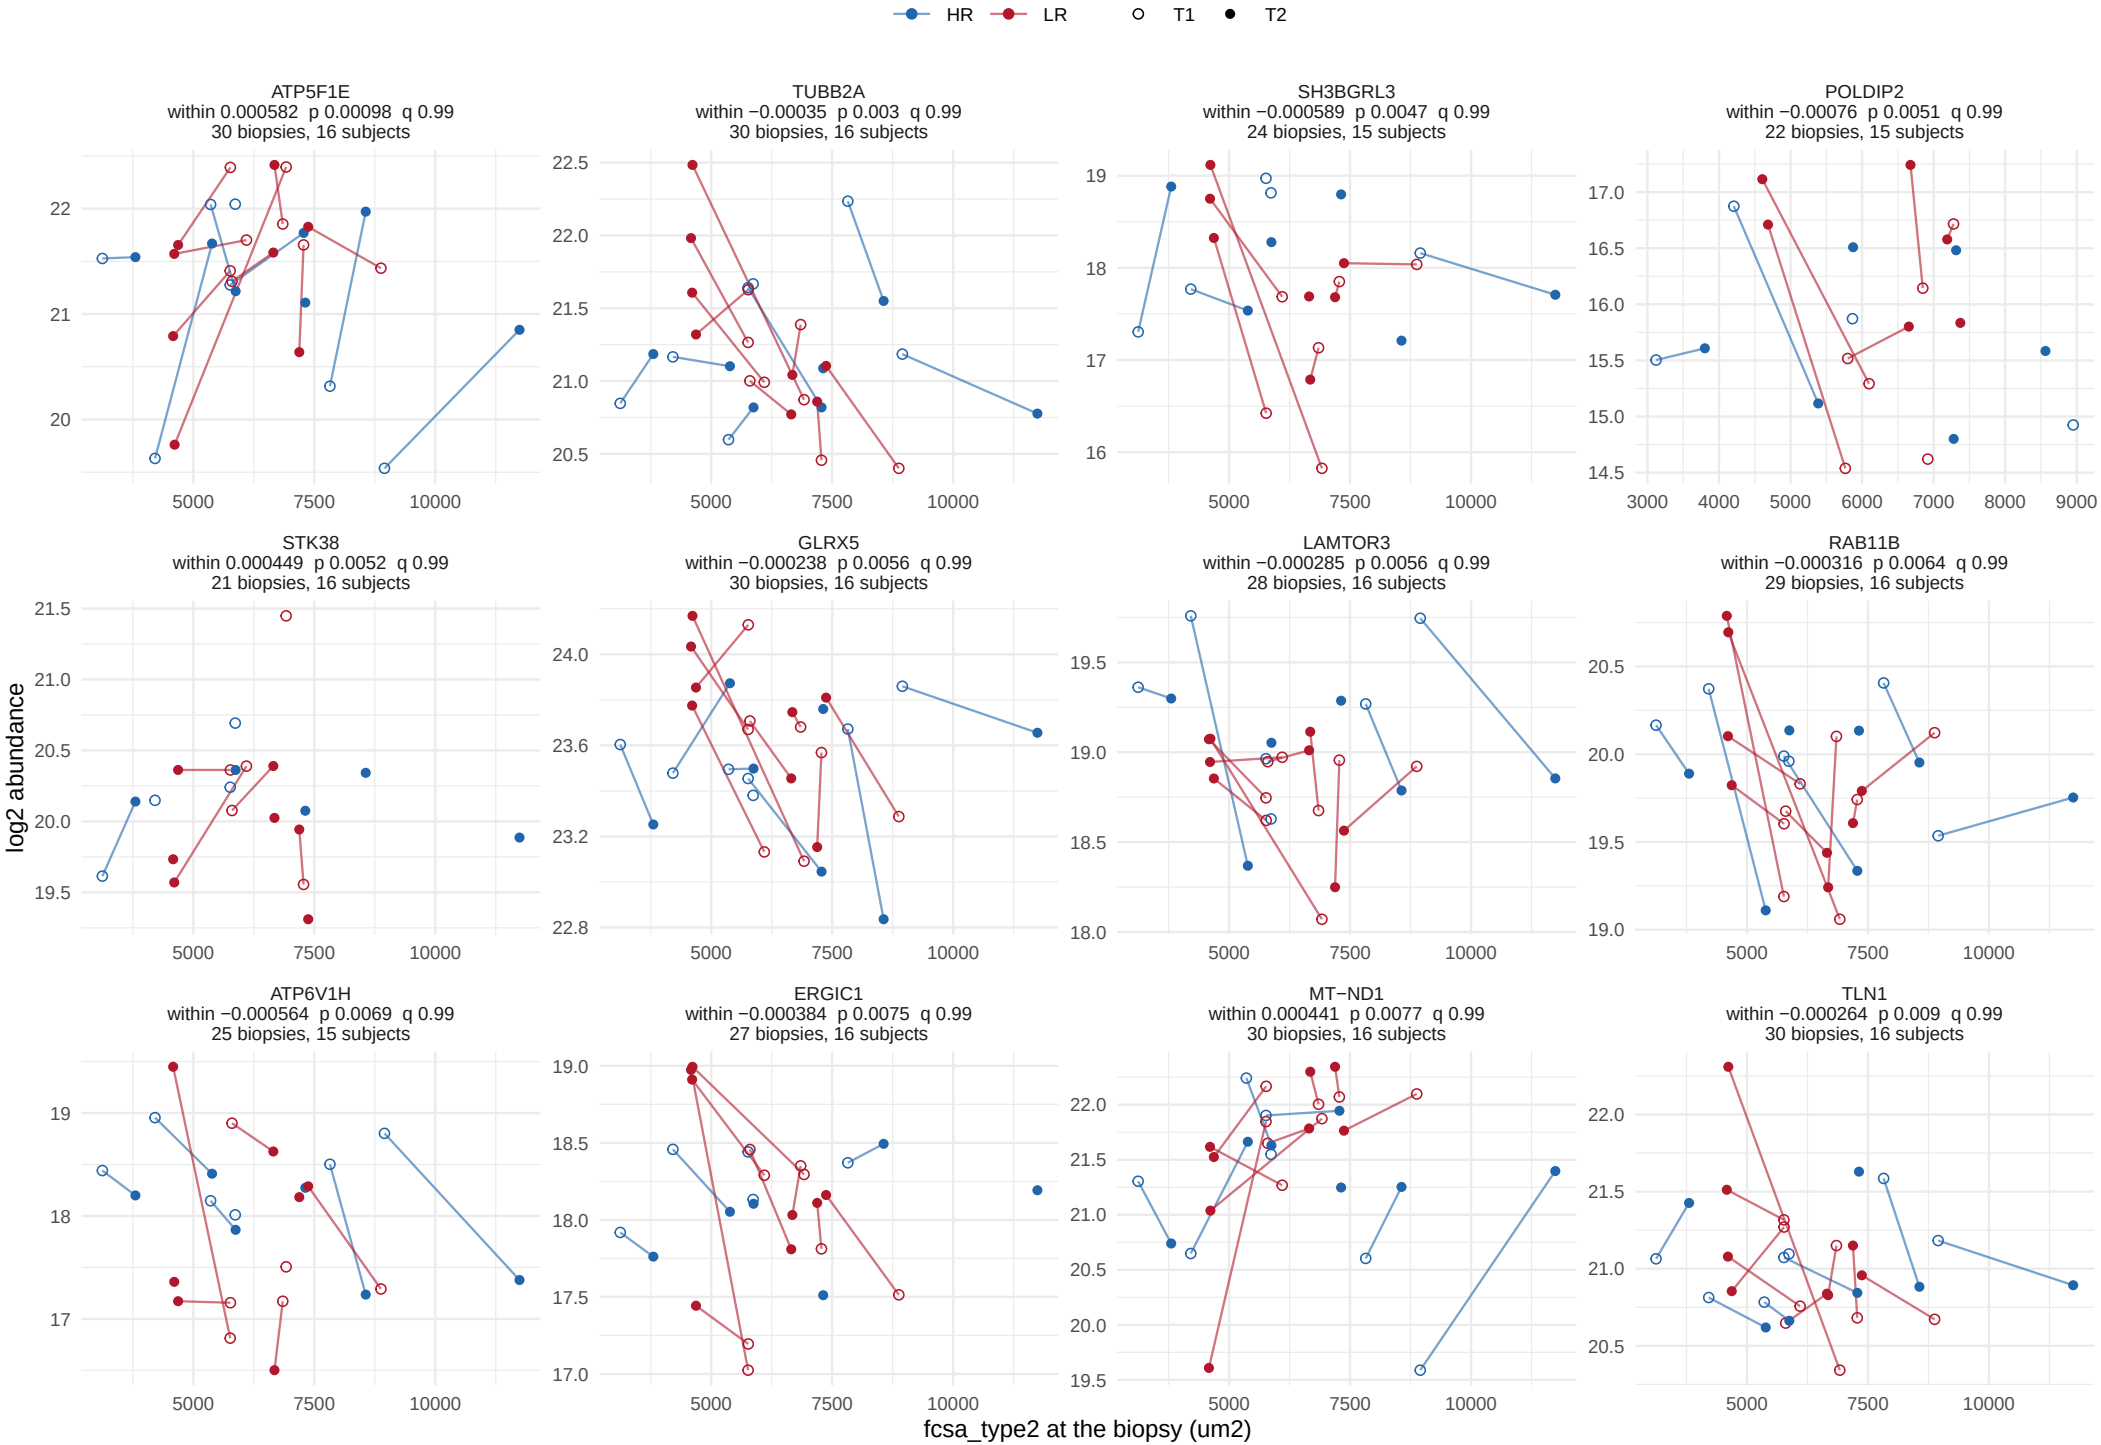

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_type2, within−person term

80 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 2 of 7.

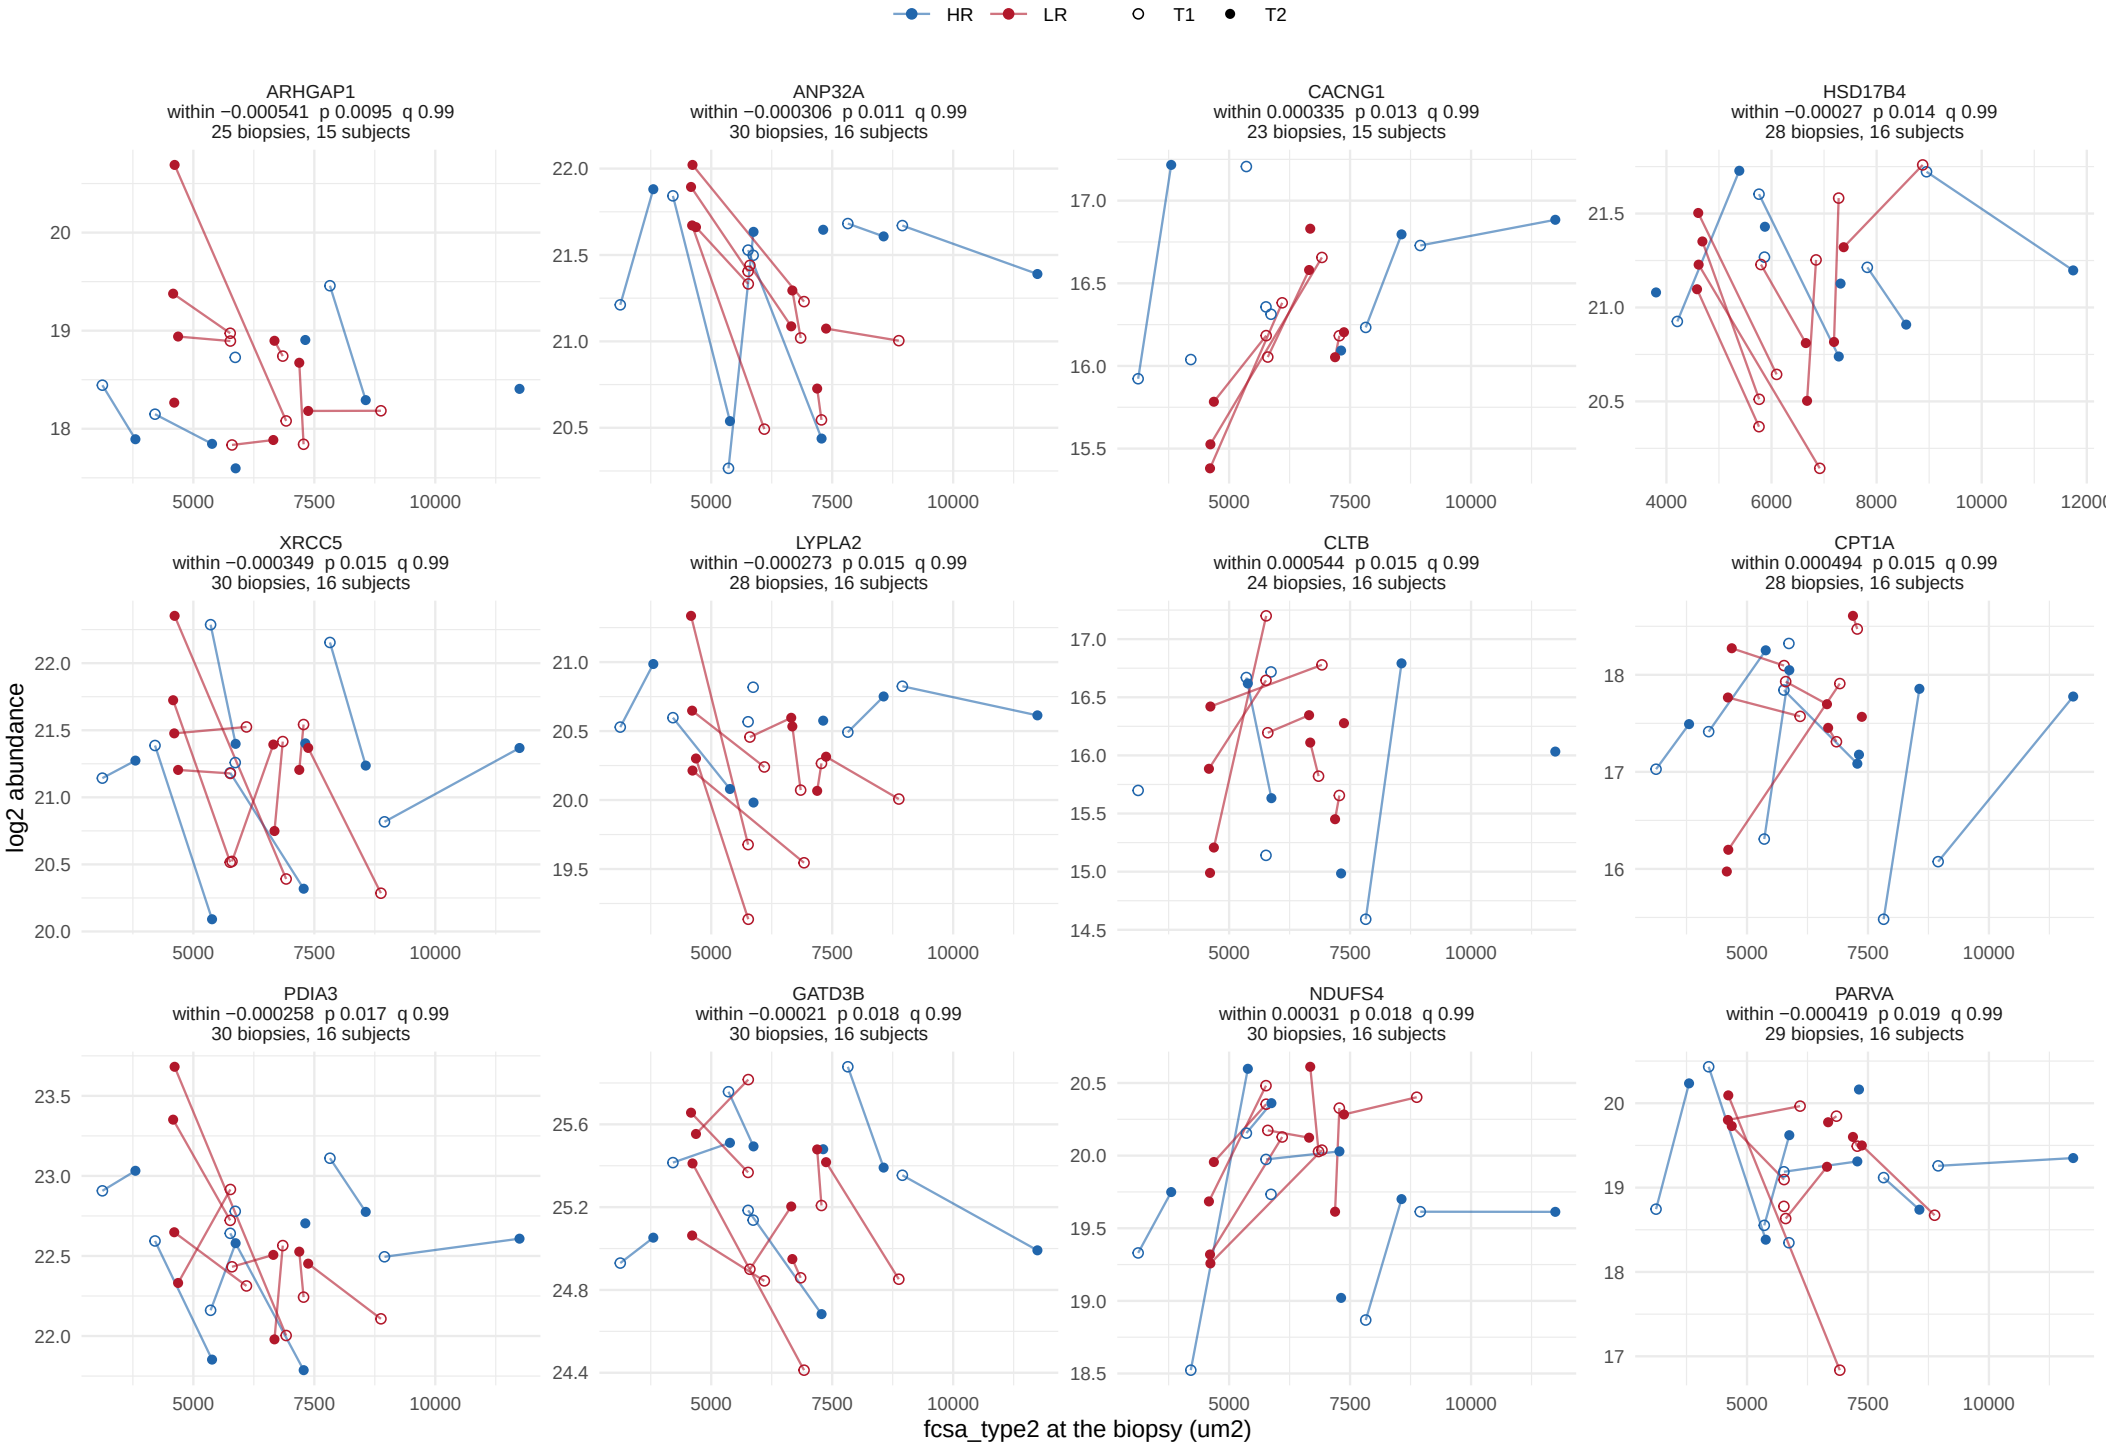

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_type2, within−person term


80 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 3 of 7.



limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_type2, within−person term


80 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 4 of 7.

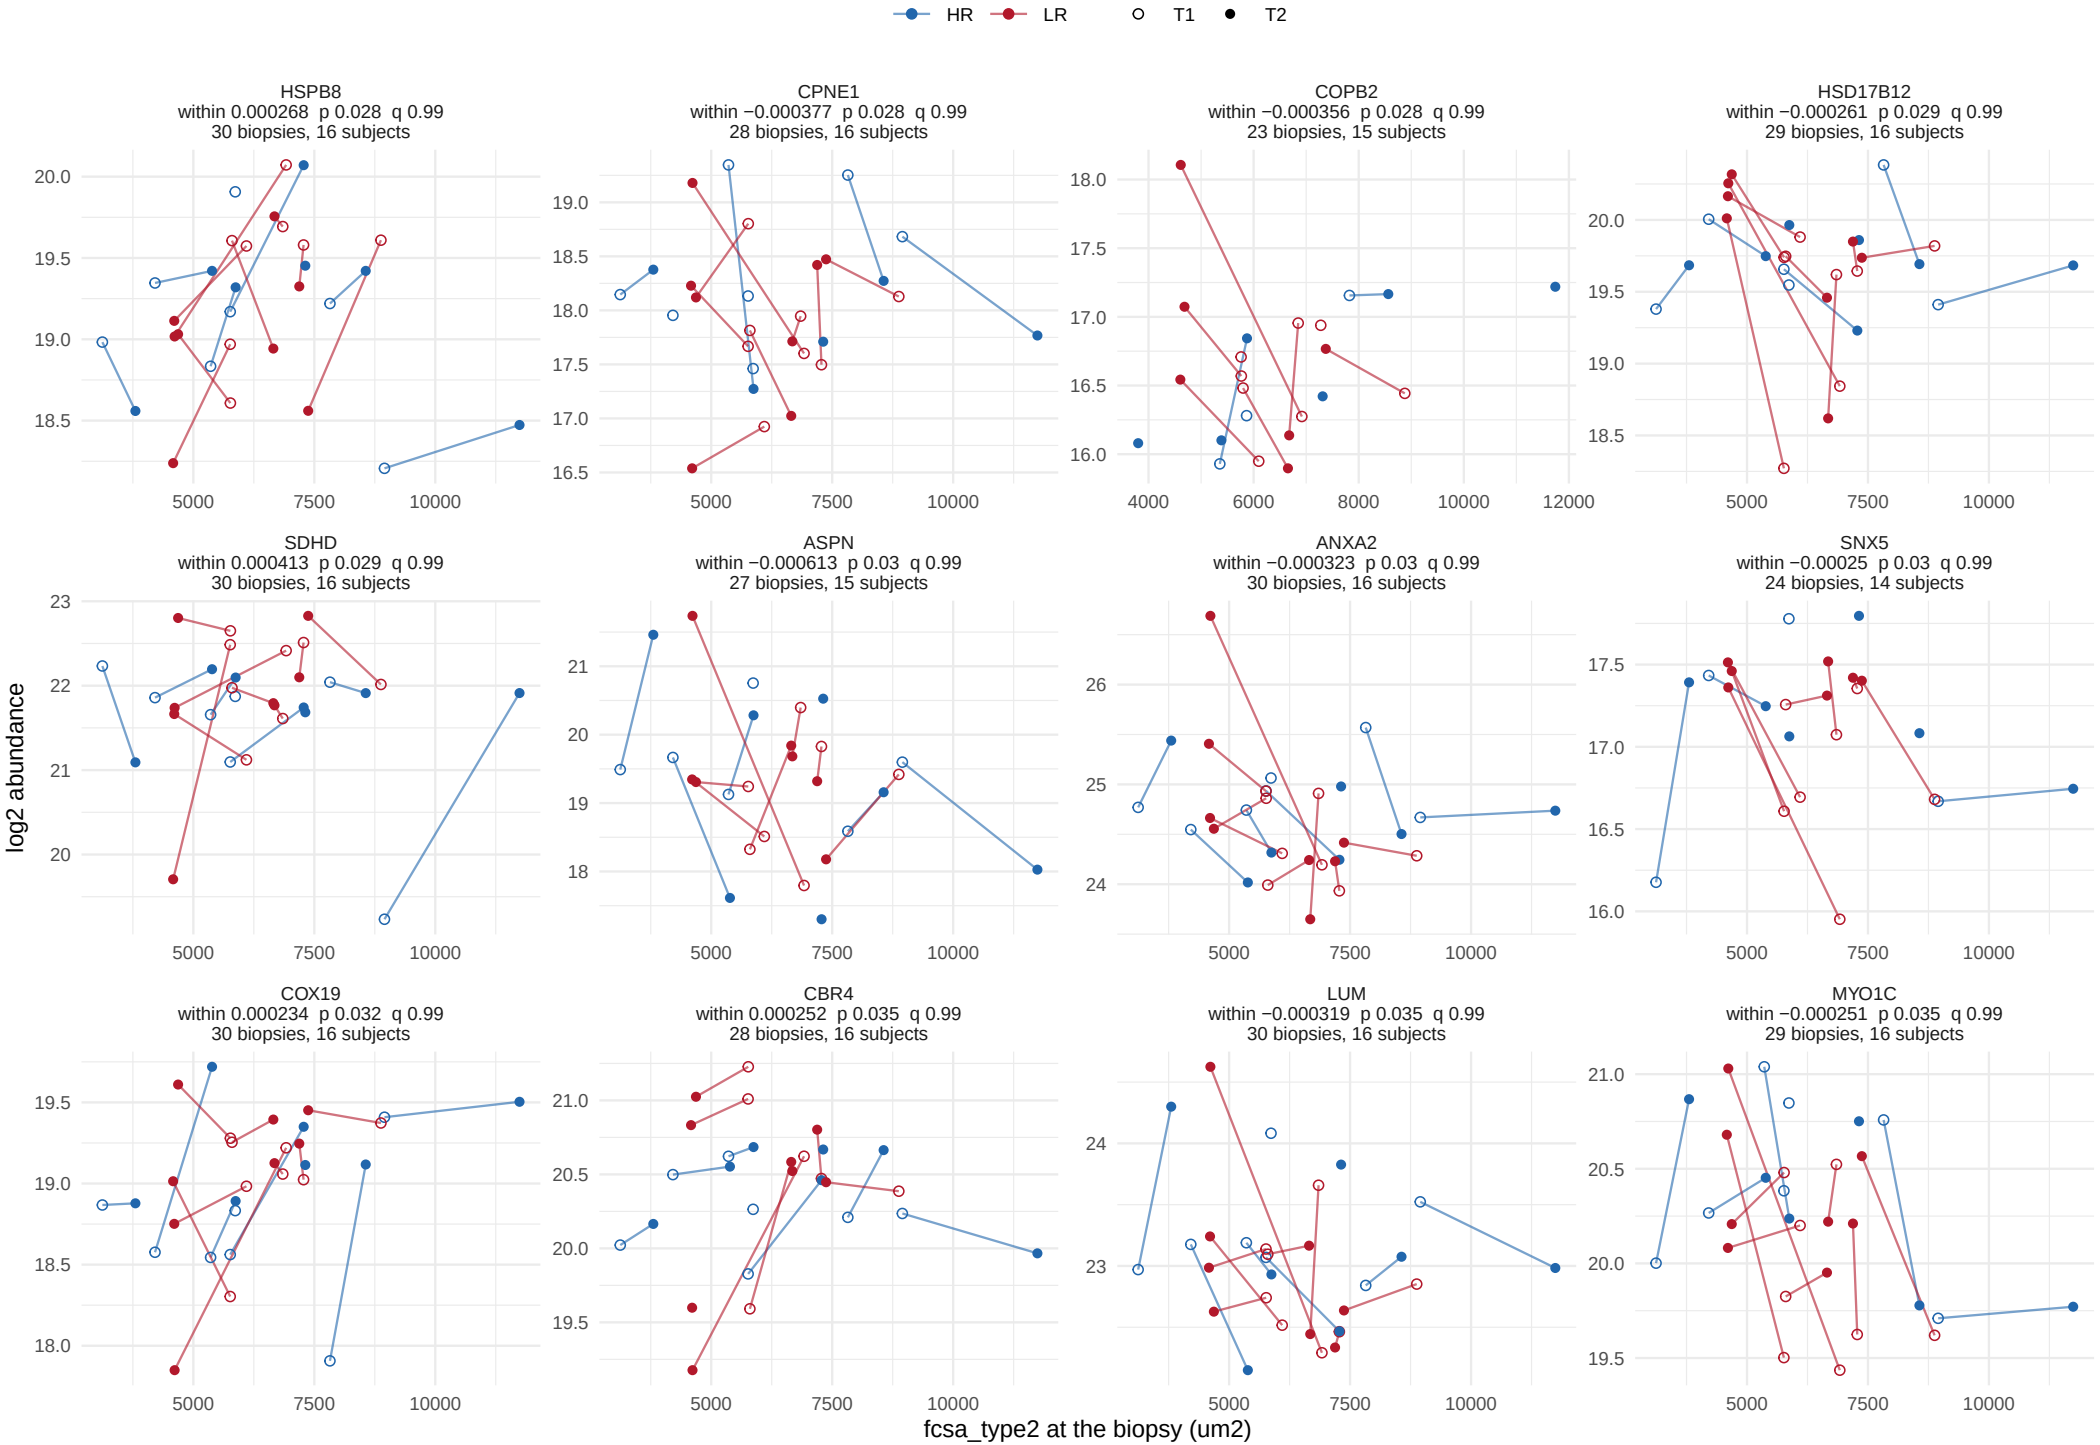

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_type2, within−person term


80 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 5 of 7.

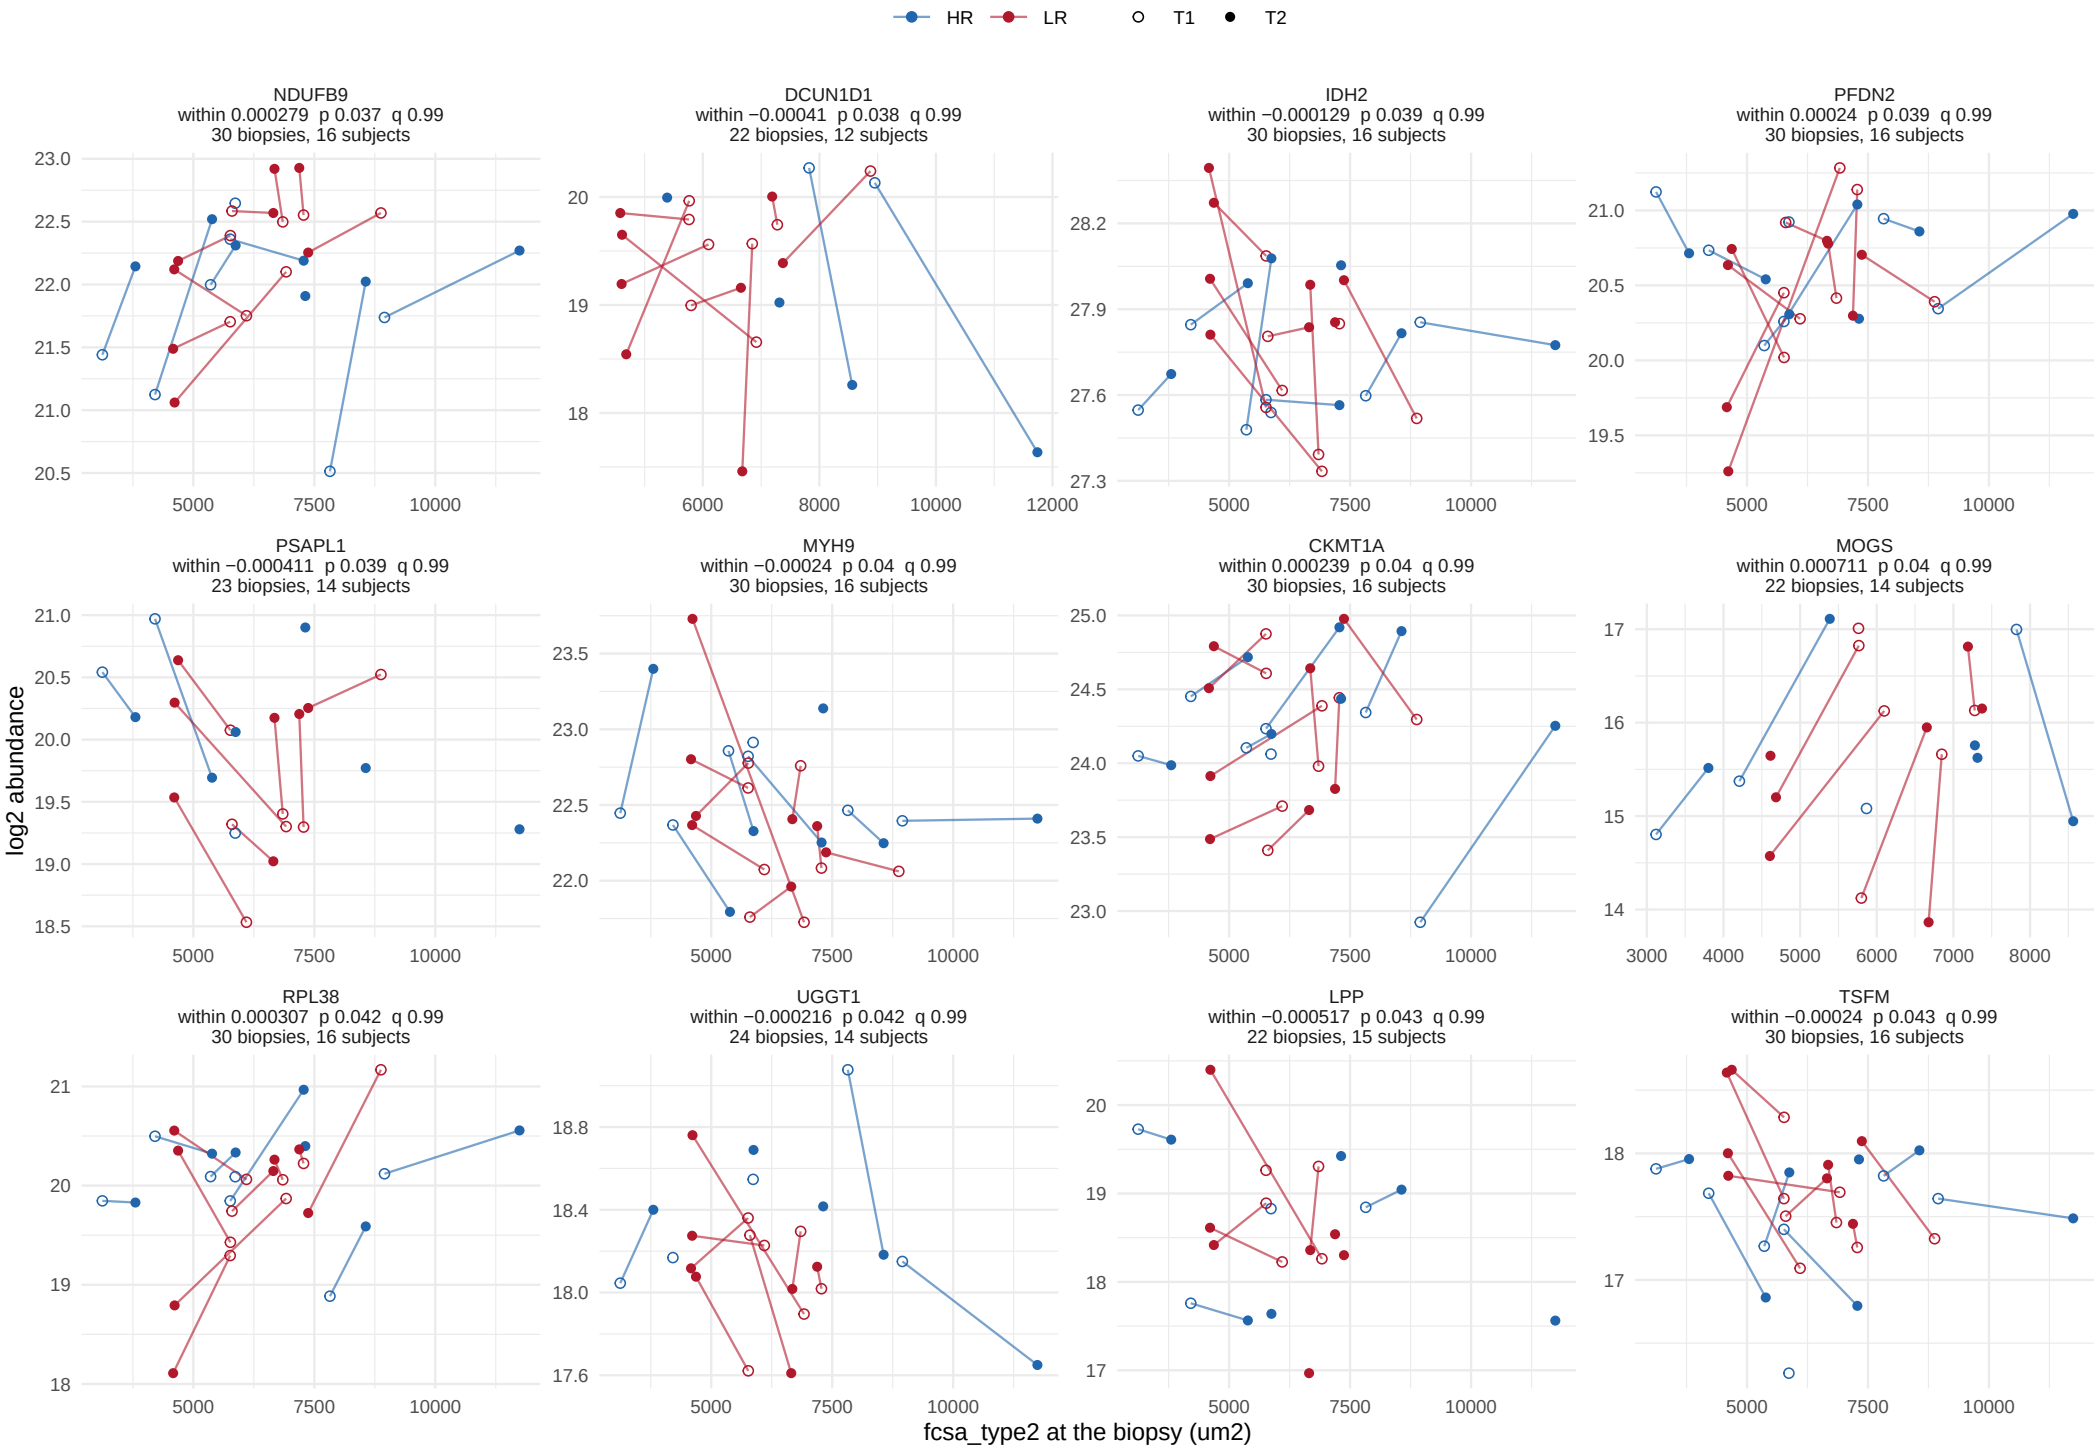

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_type2, within−person term


80 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 6 of 7.

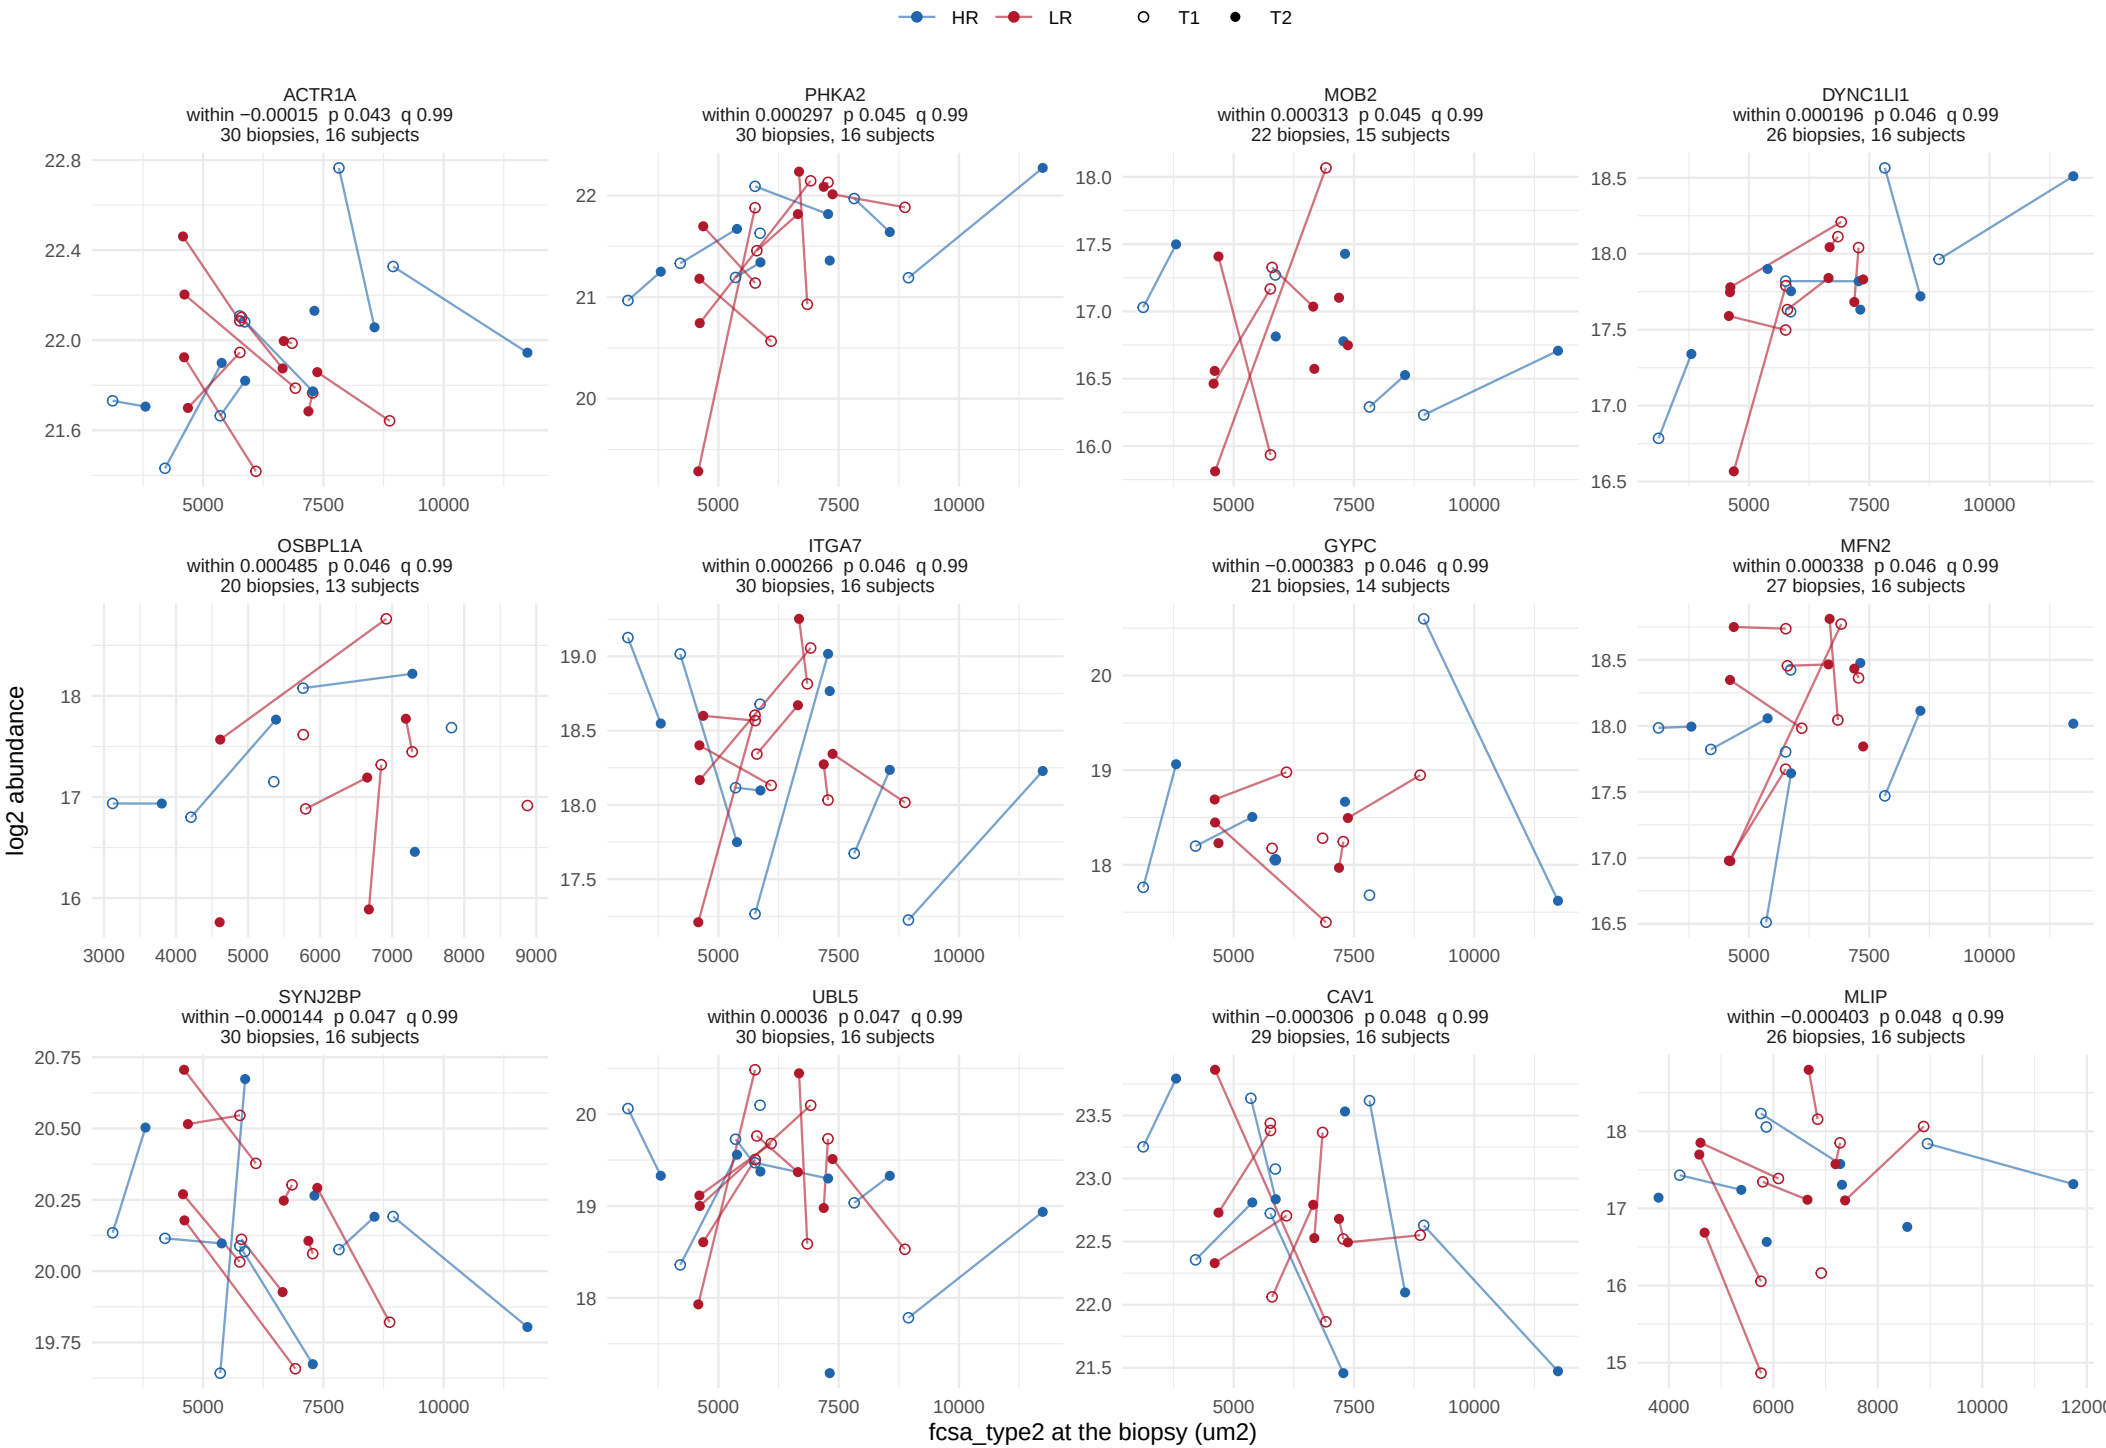

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_type2, within−person term


80 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 7 of 7.

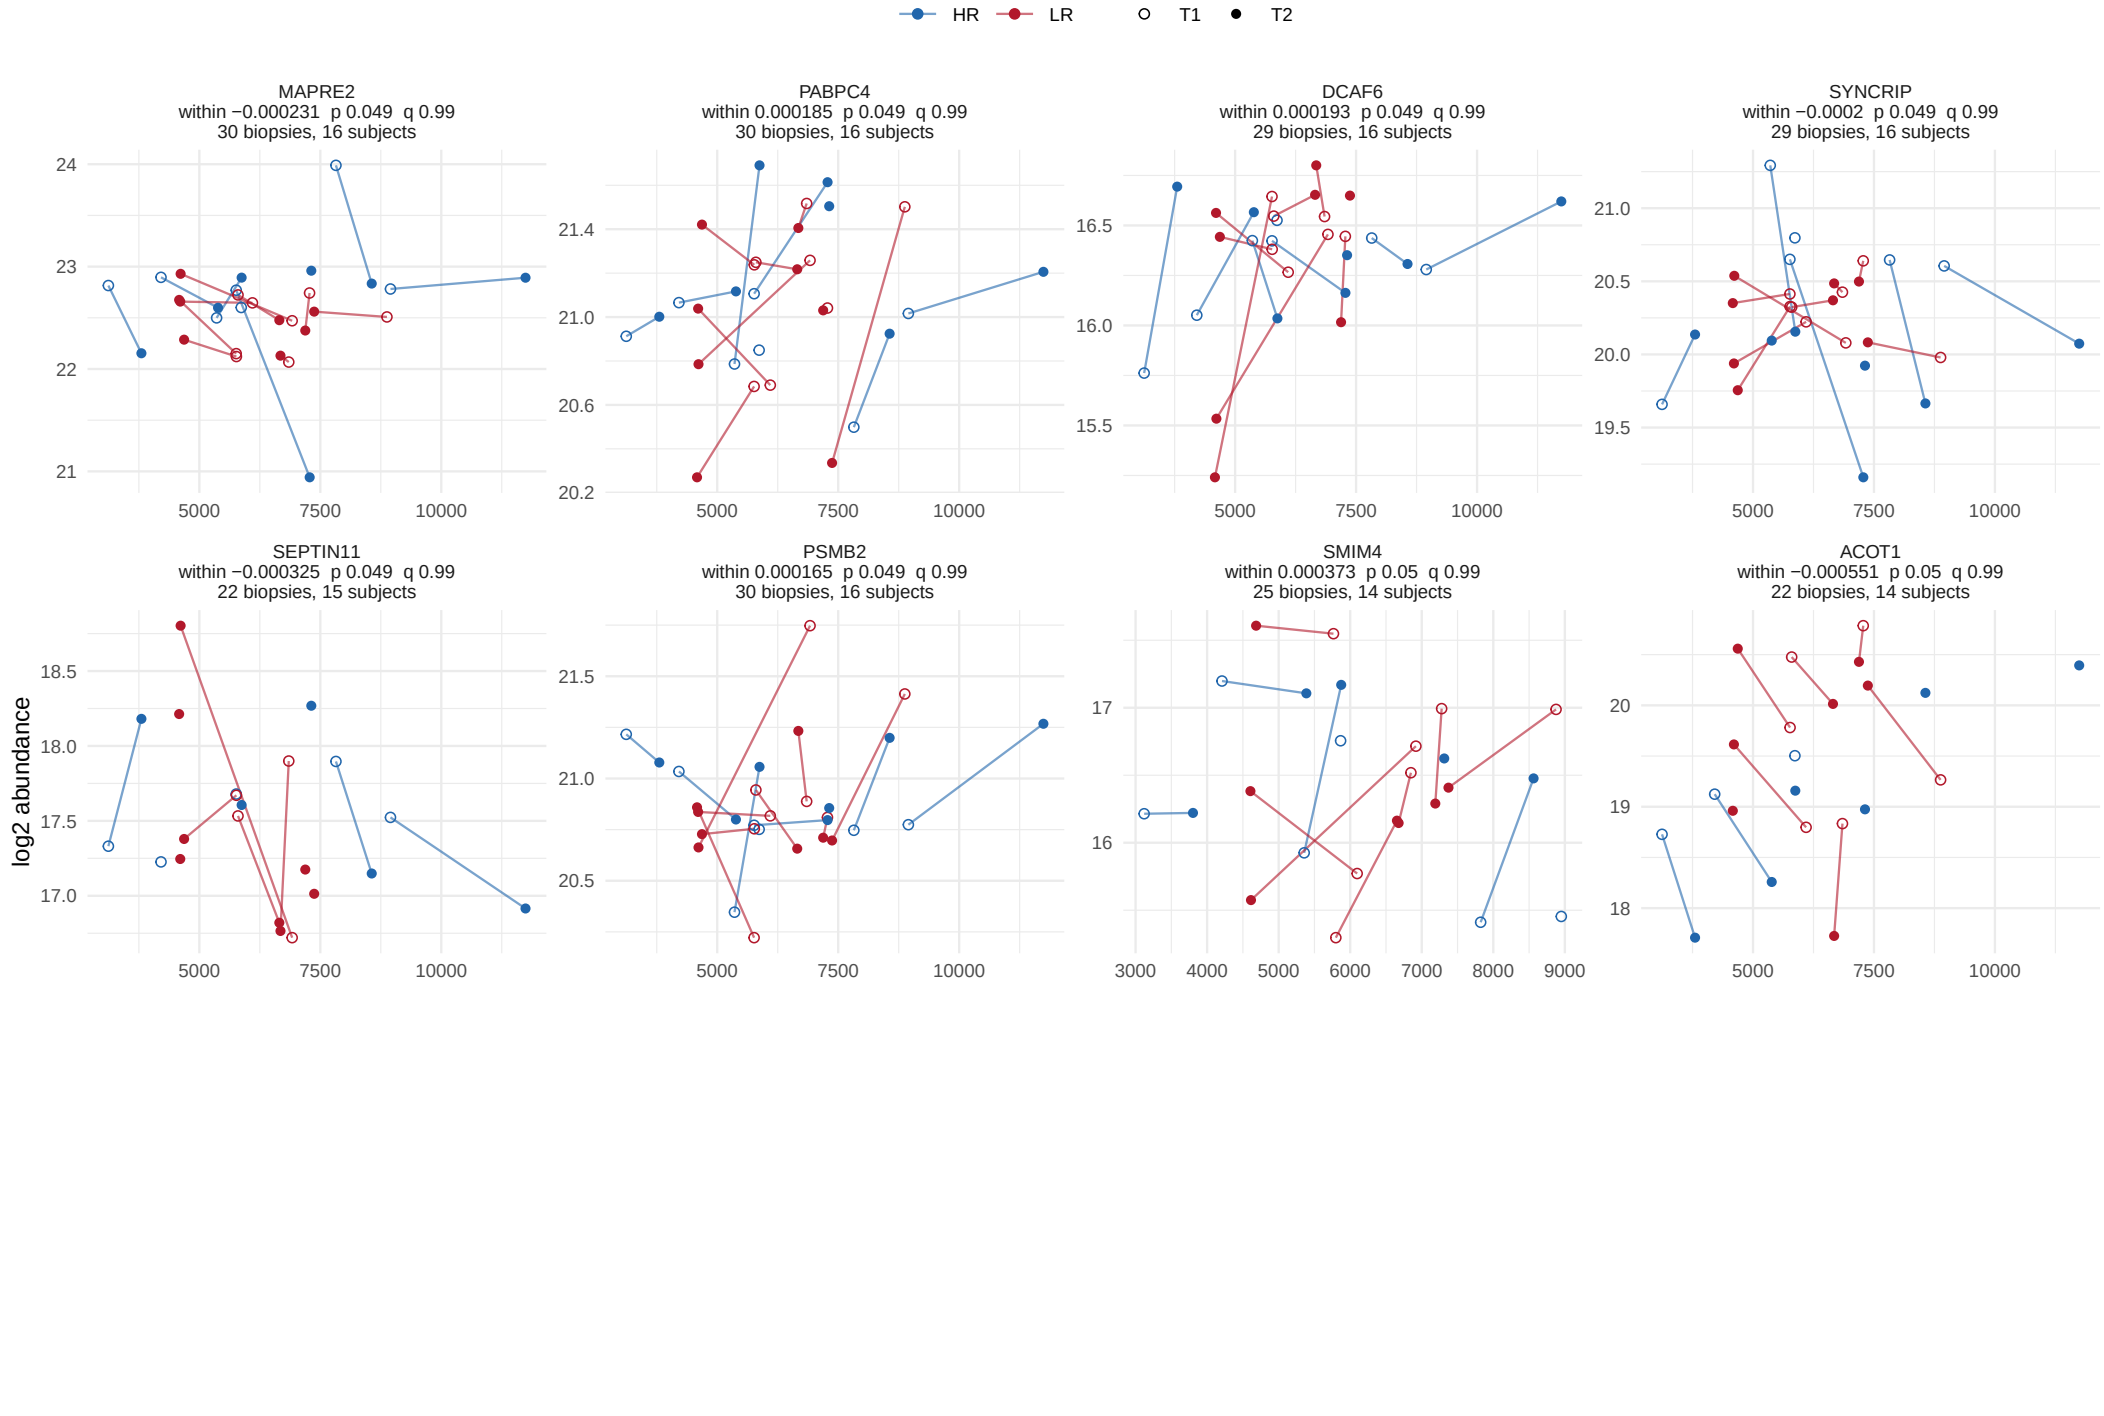

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_type2, between−person term


76 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 1 of 7.

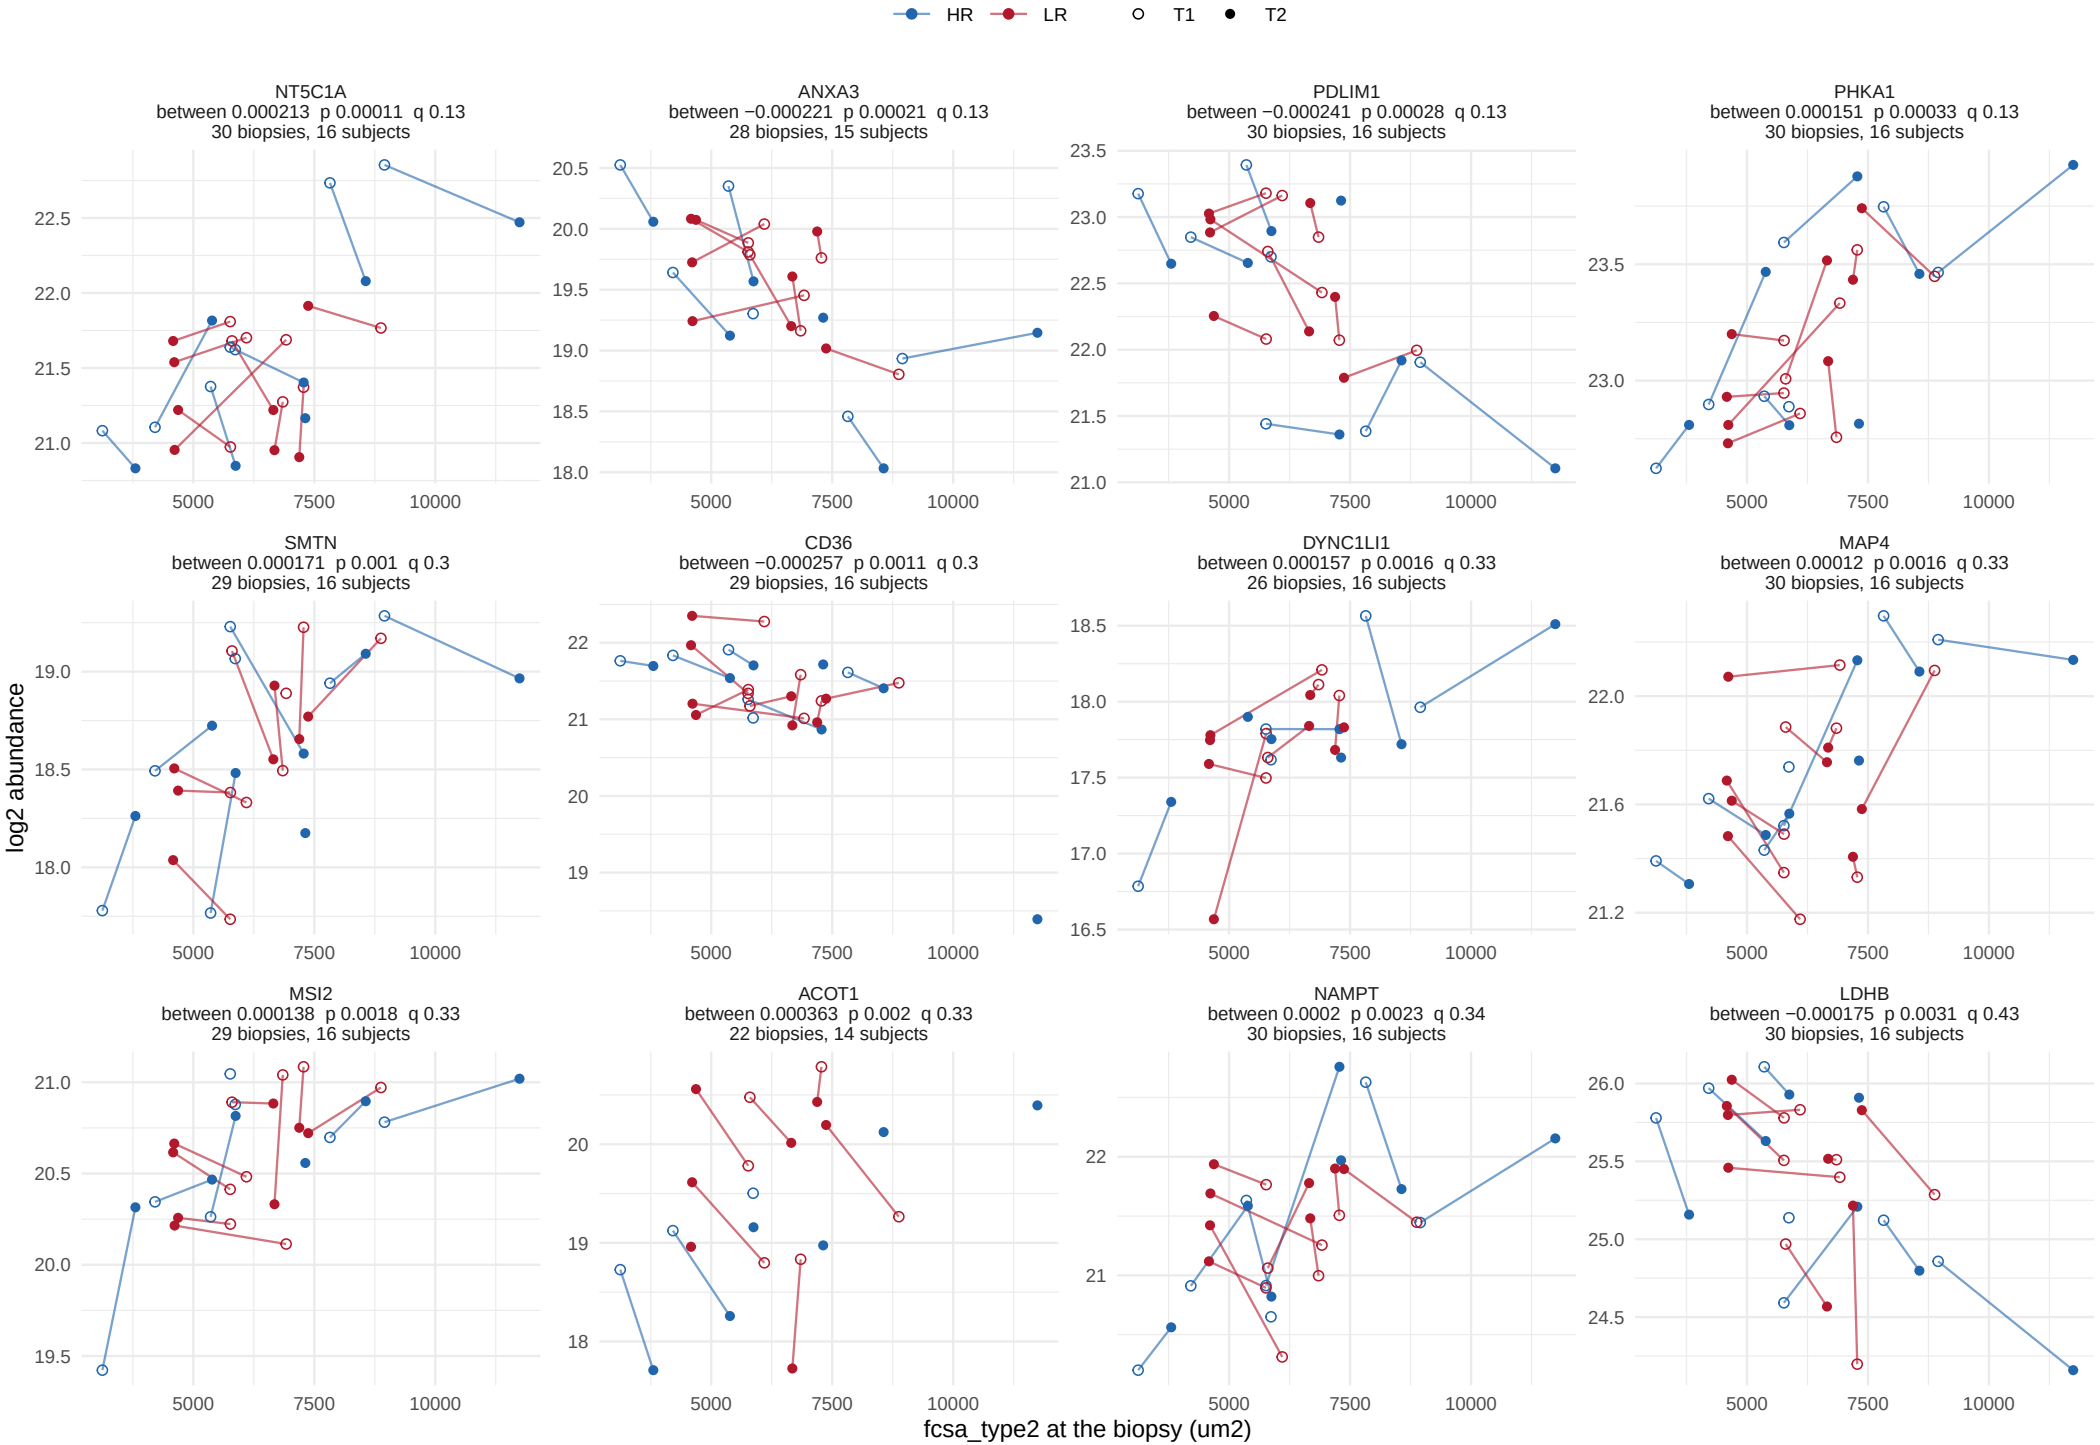

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_type2, between−person term


76 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 2 of 7.

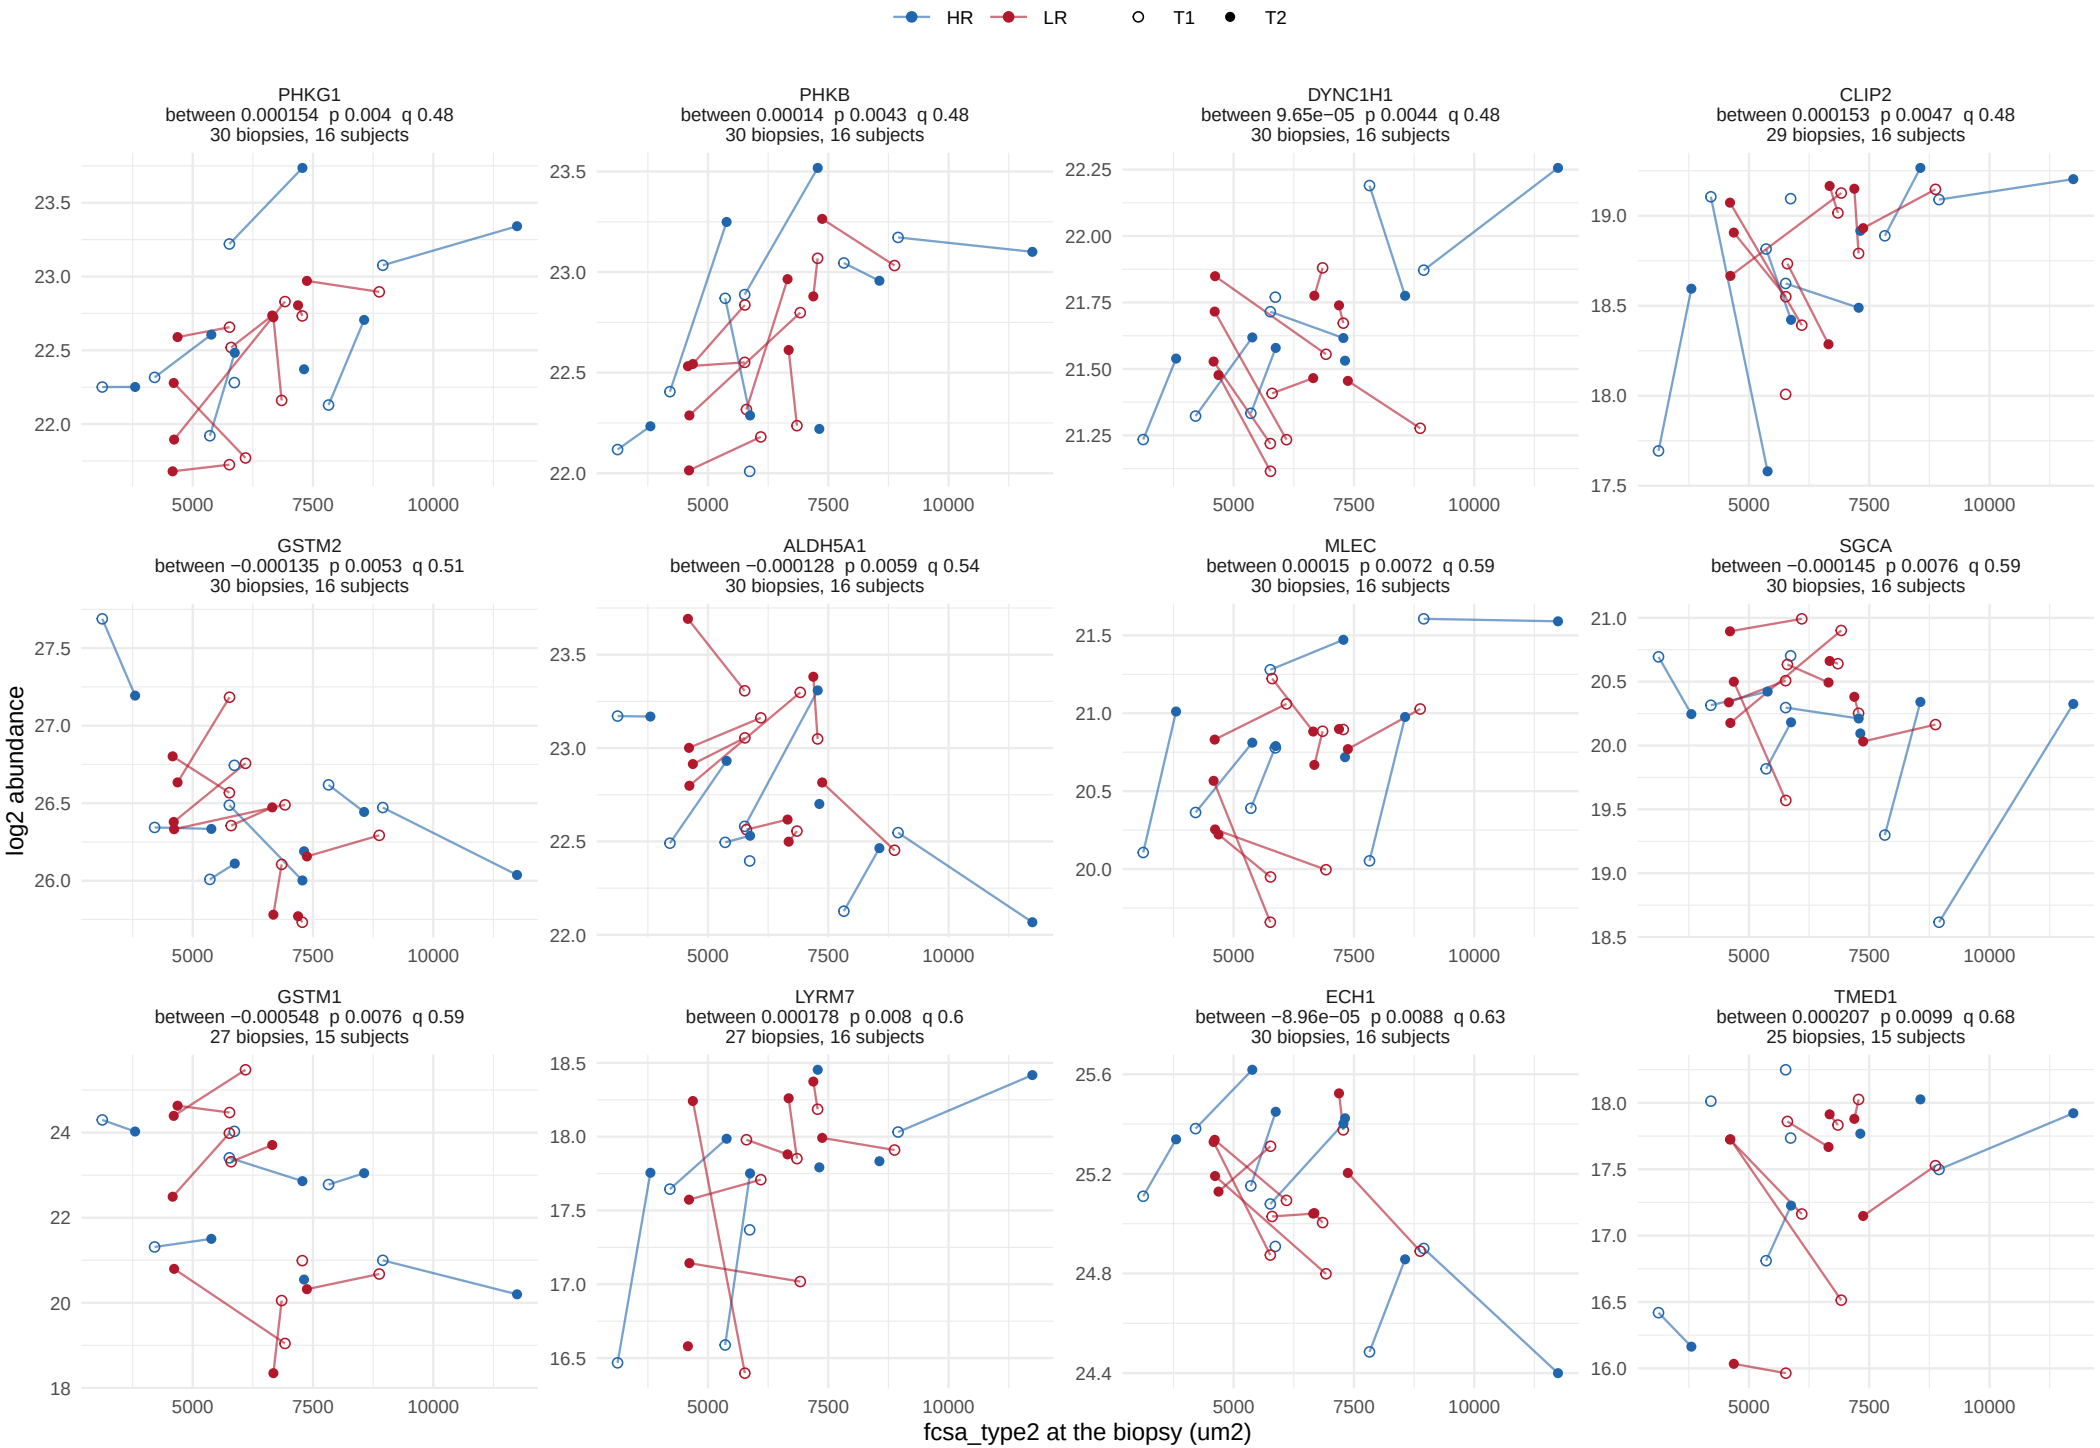

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_type2, between−person term


76 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 3 of 7.

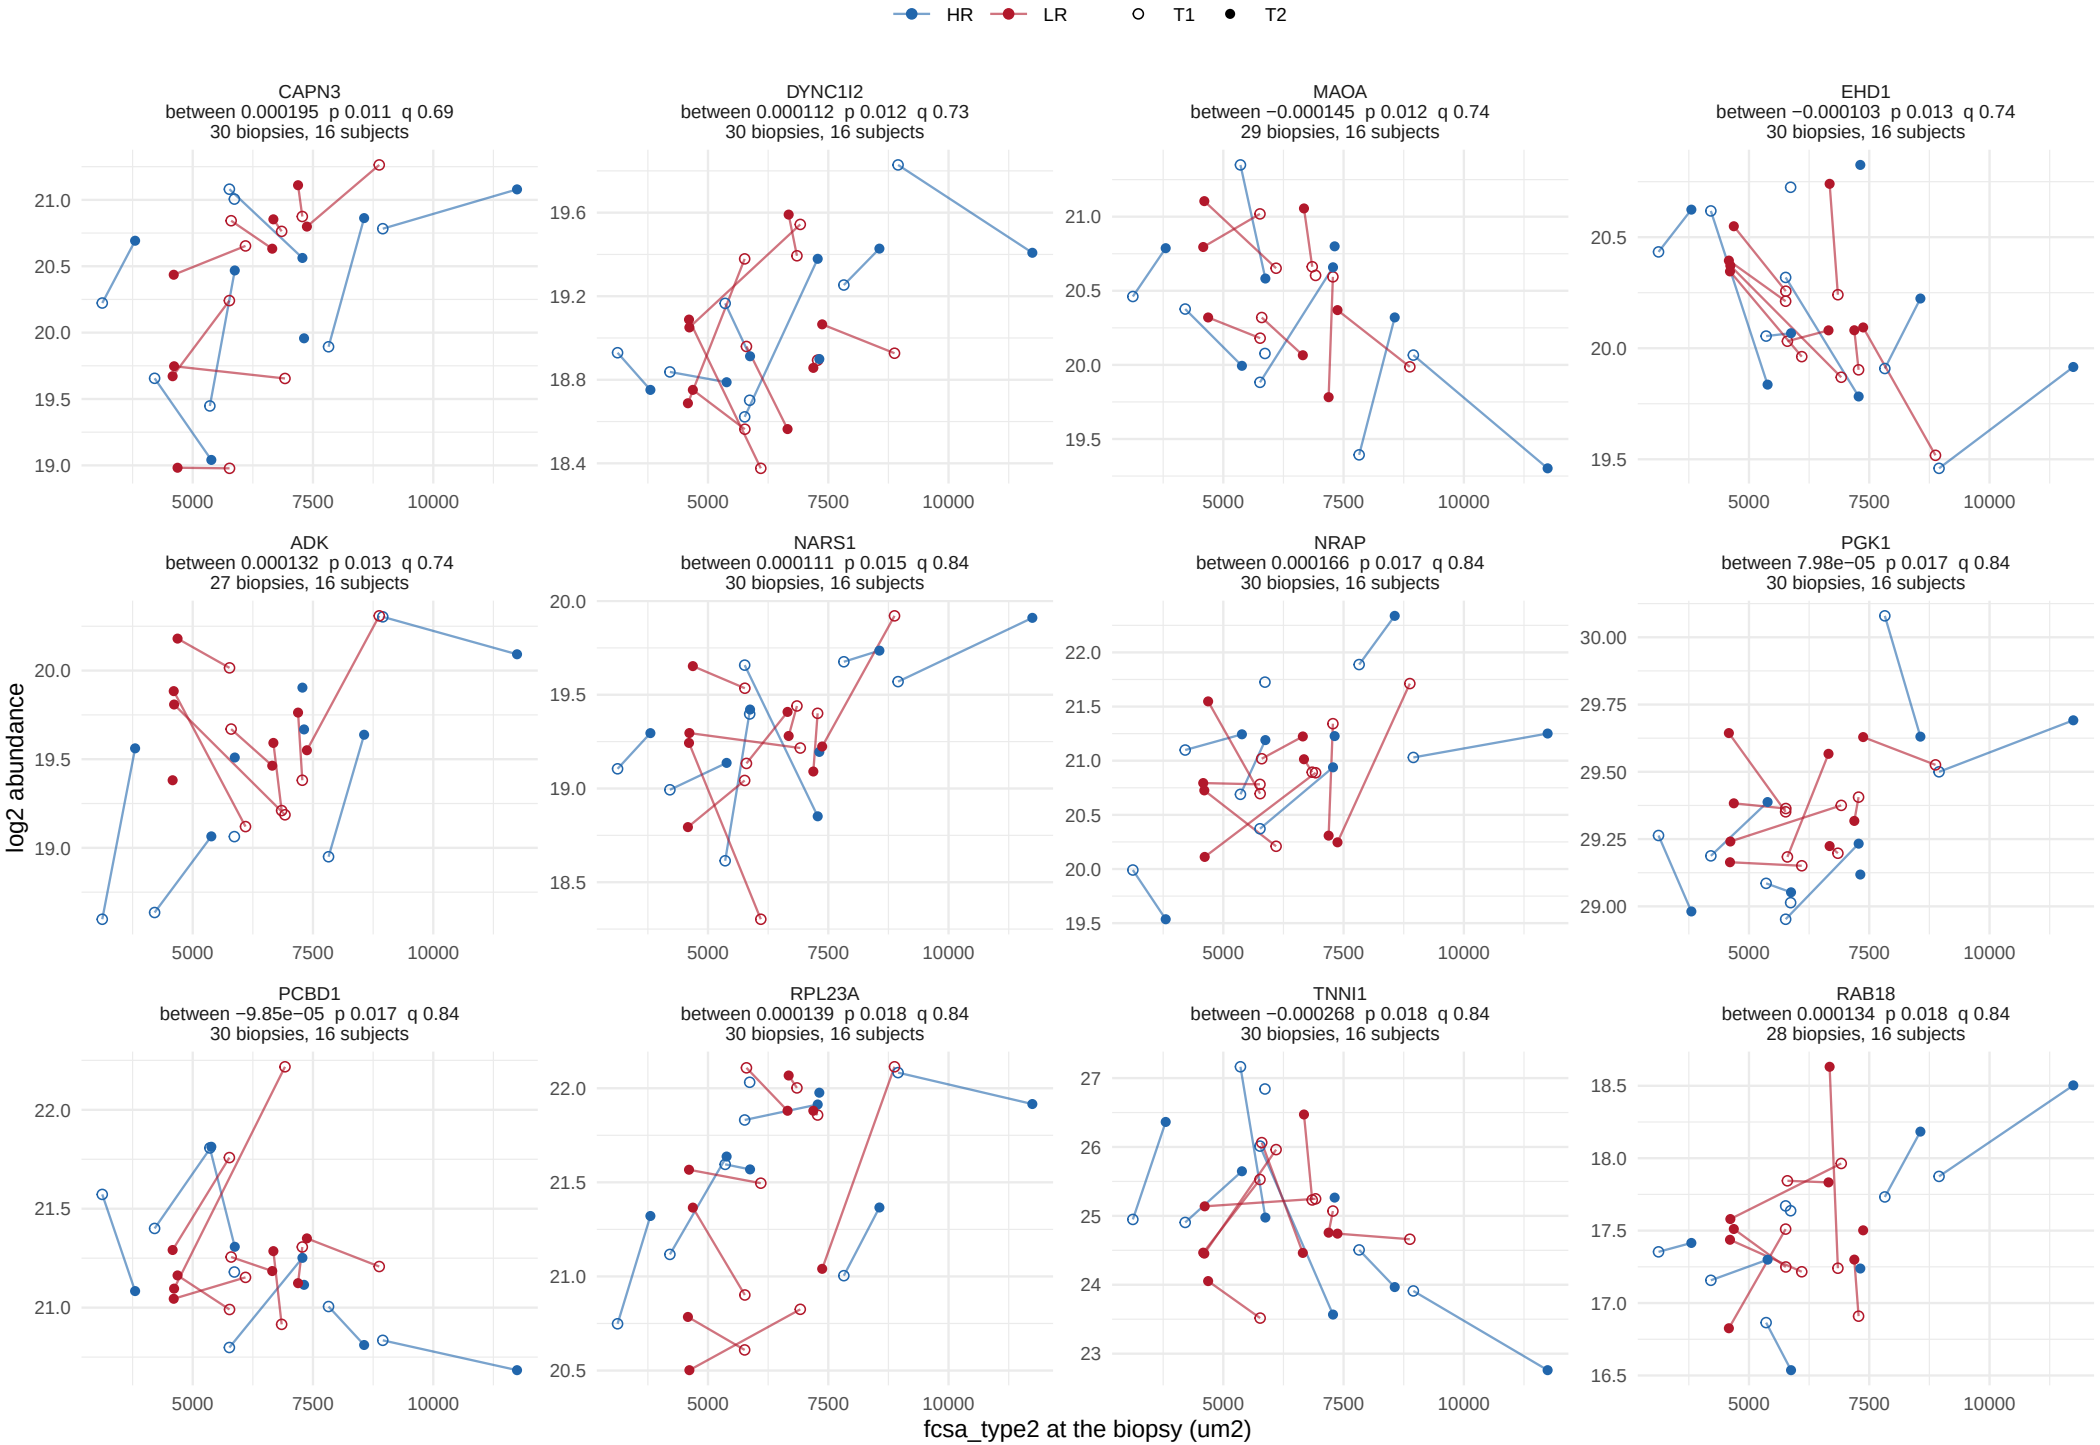

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_type2, between−person term


76 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 4 of 7.

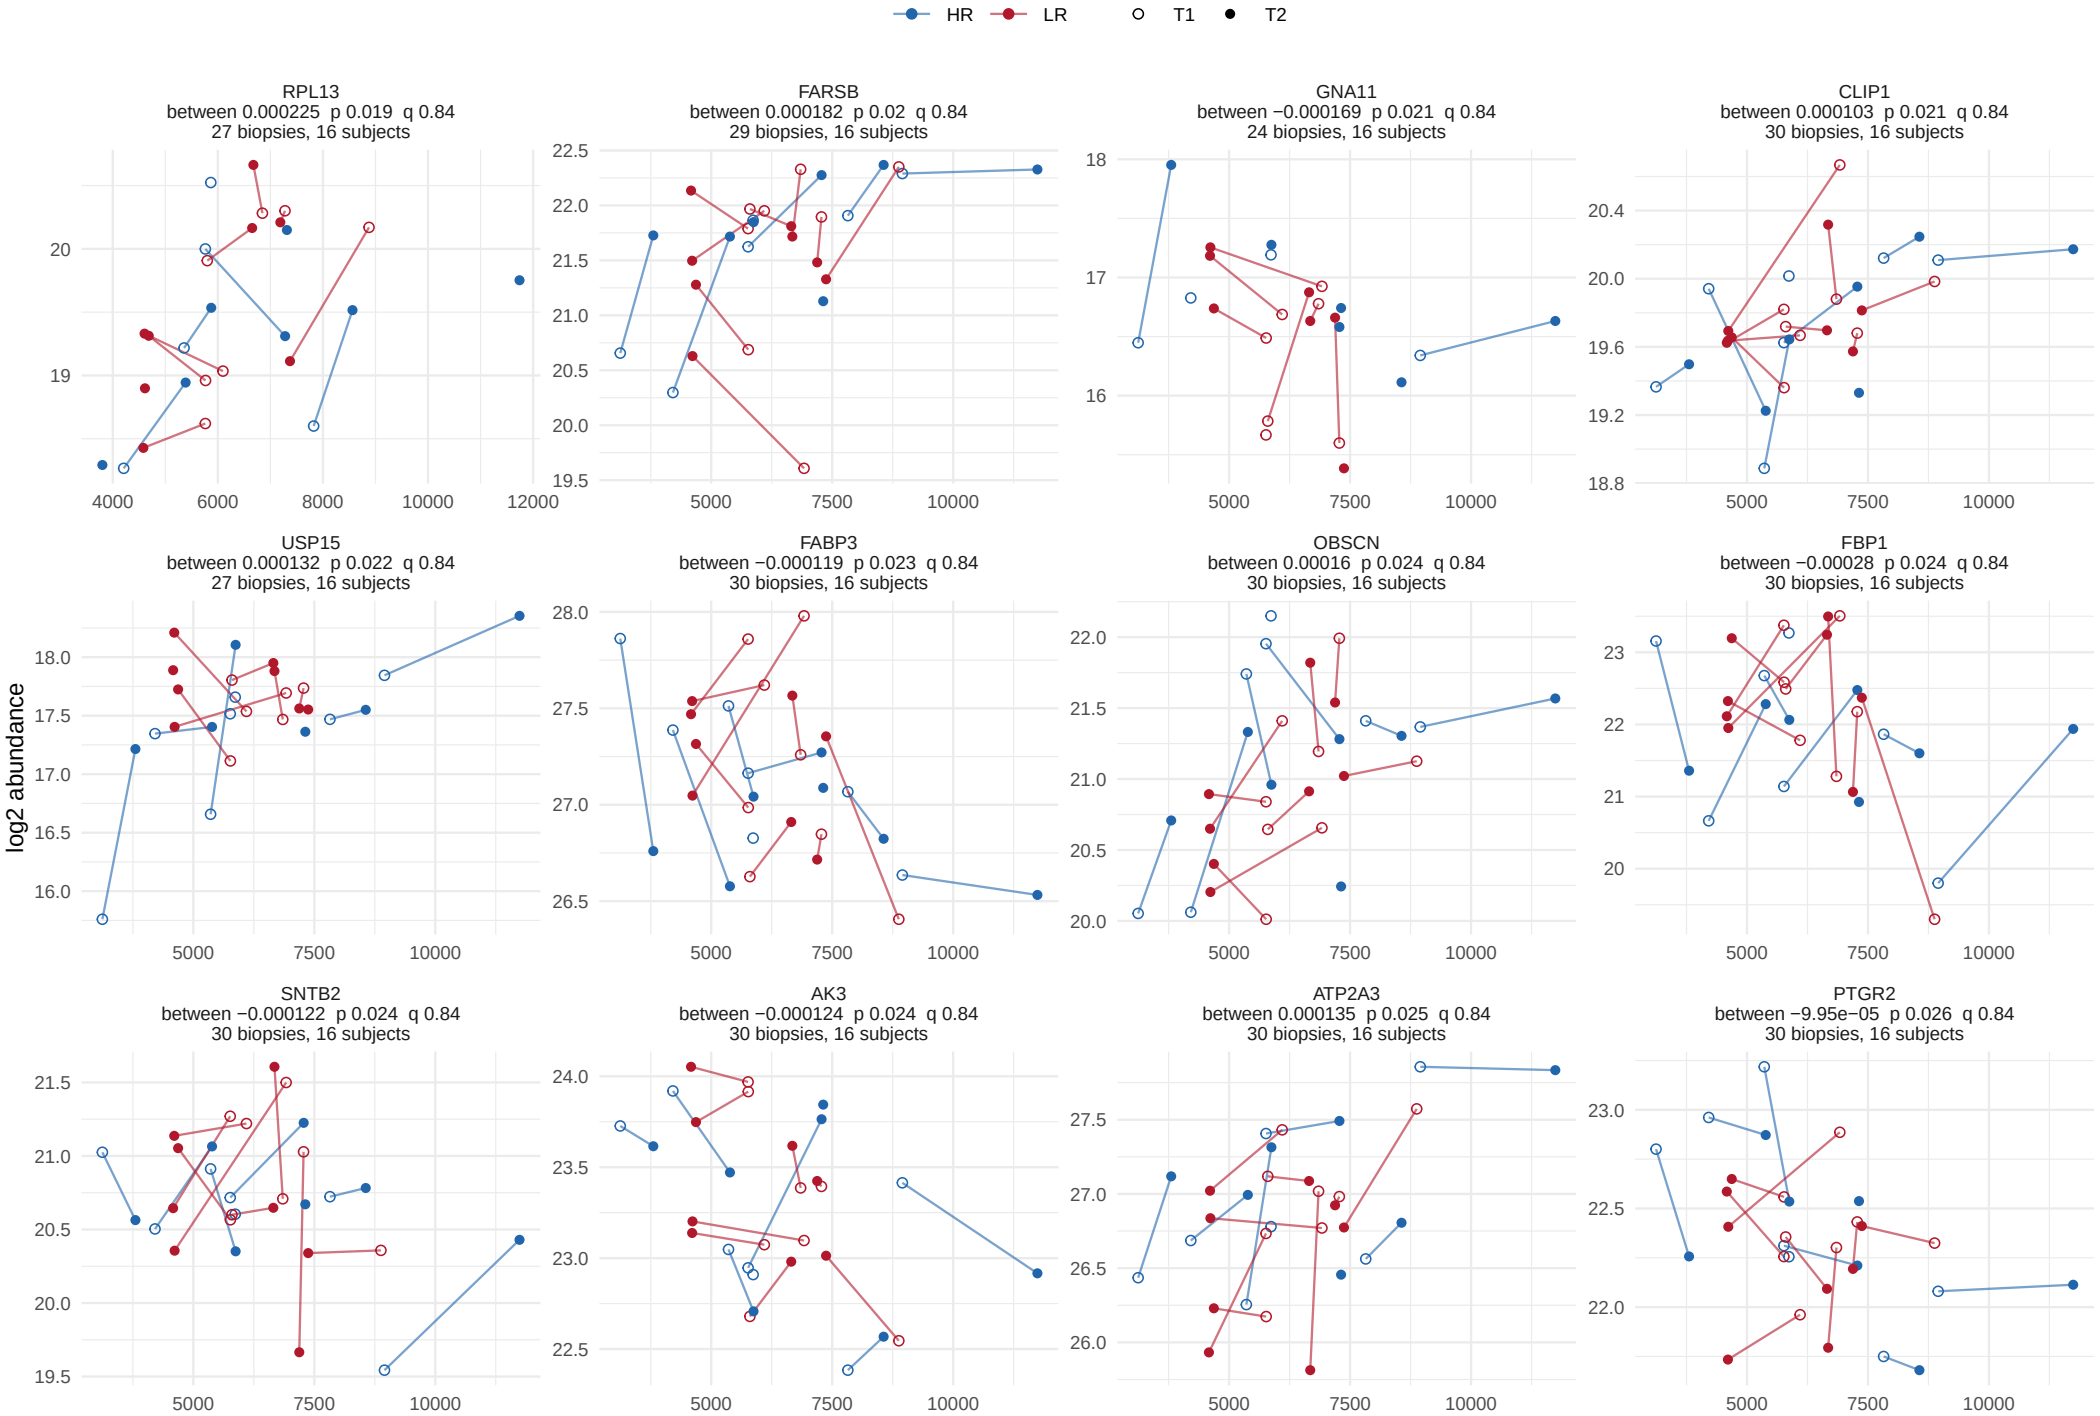

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_type2, between−person term

76 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 5 of 7.

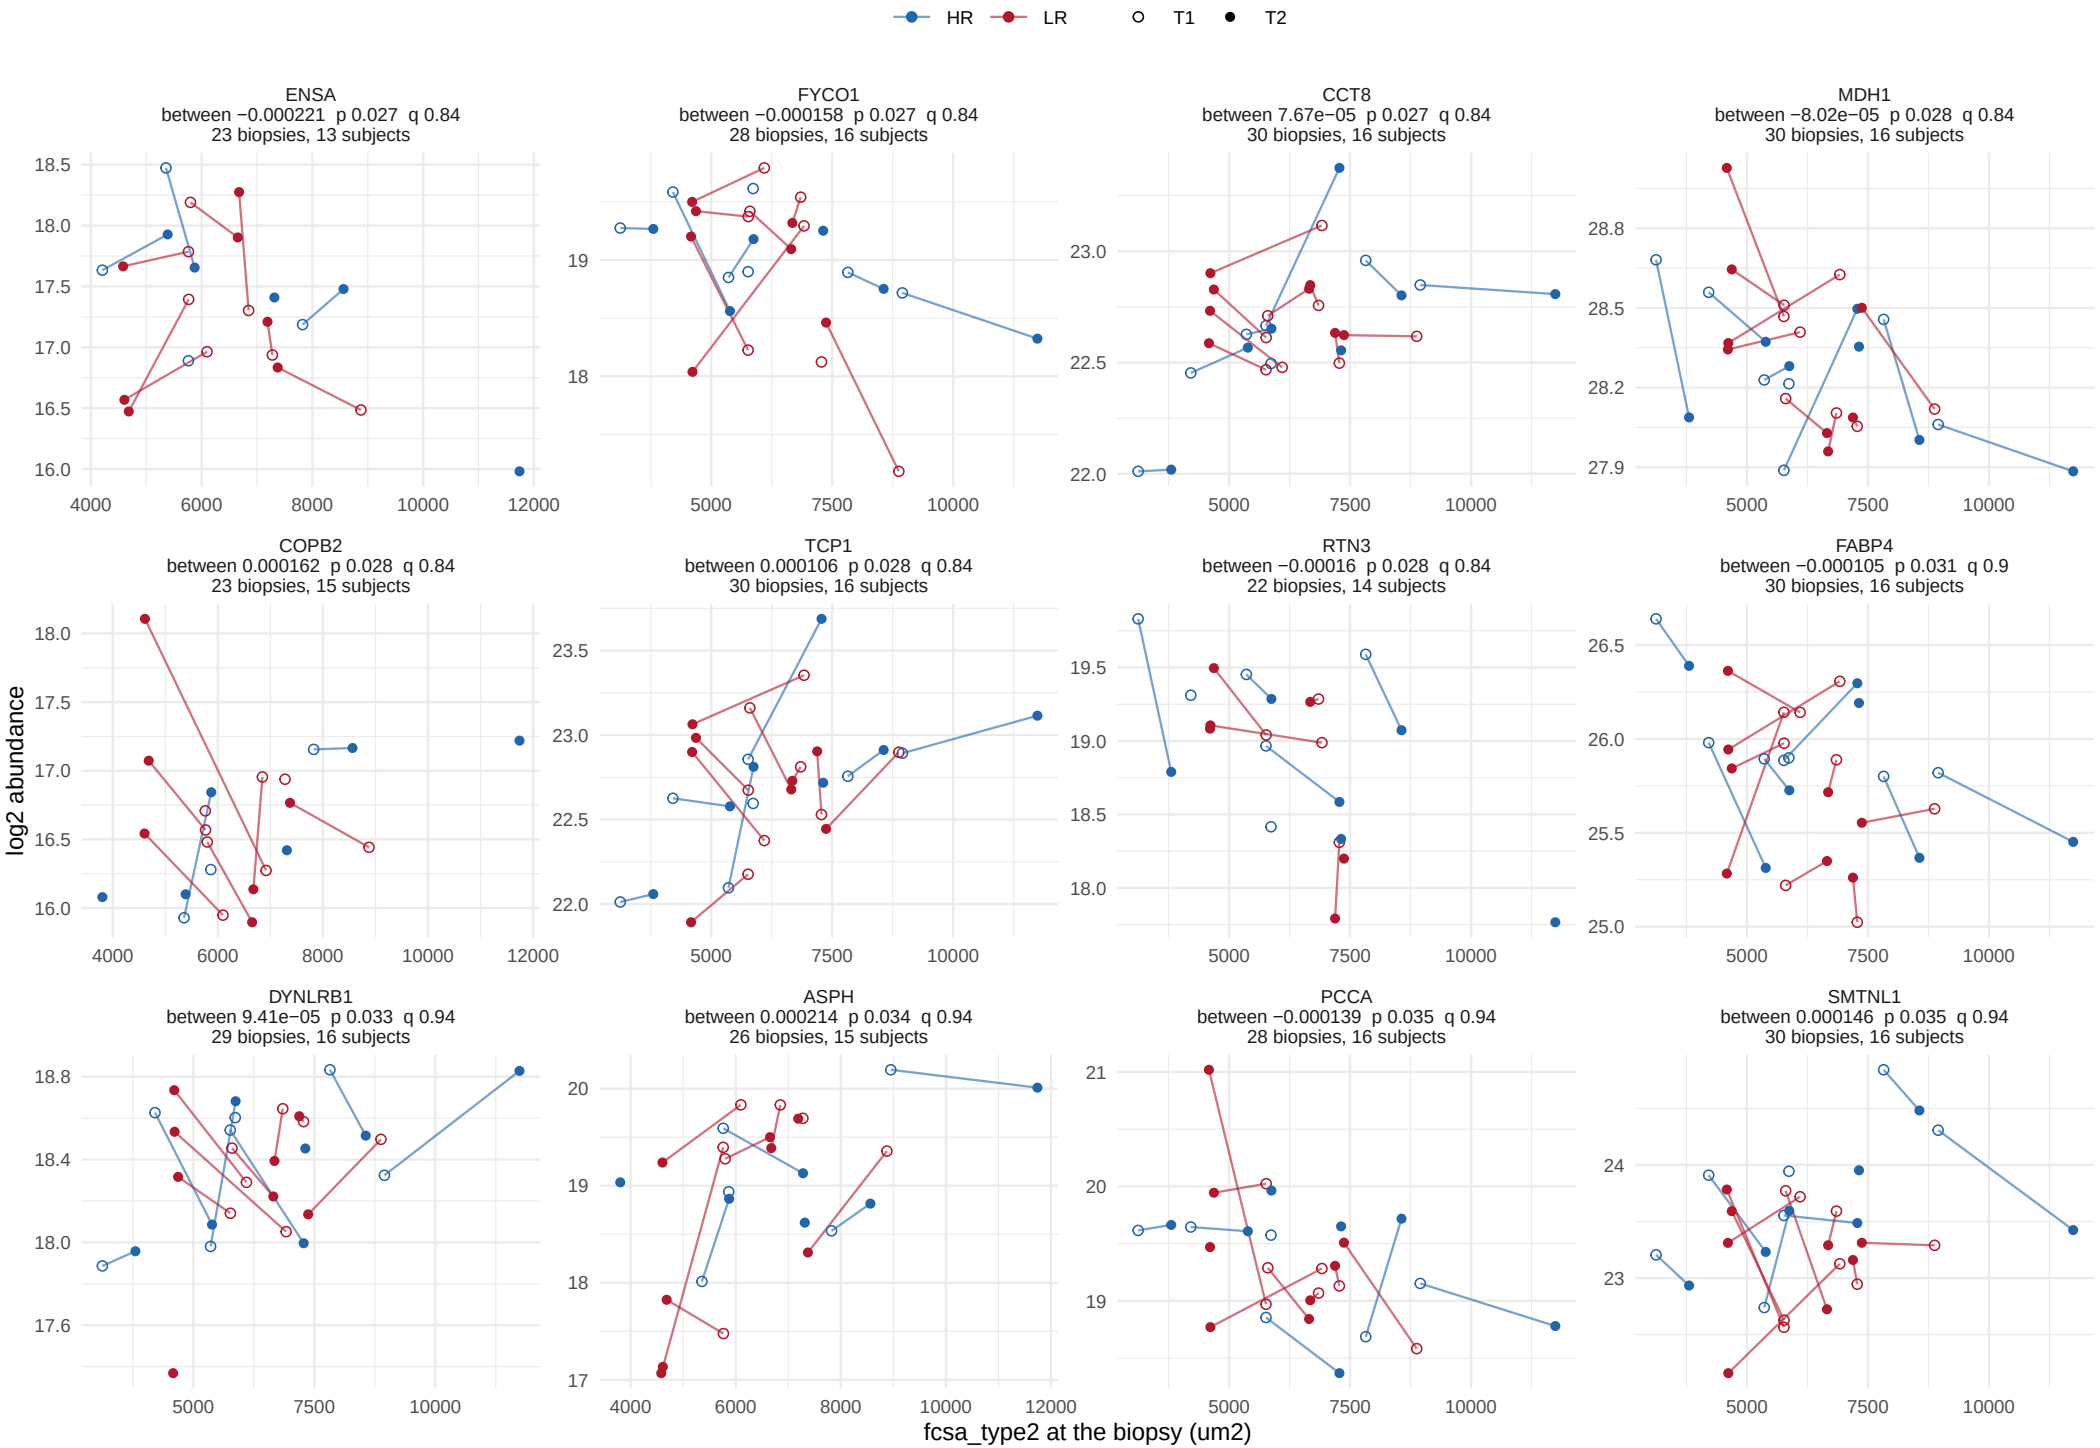

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_type2, between−person term


76 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 6 of 7.



limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

fcsa_type2, between−person term


76 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 7 of 7.

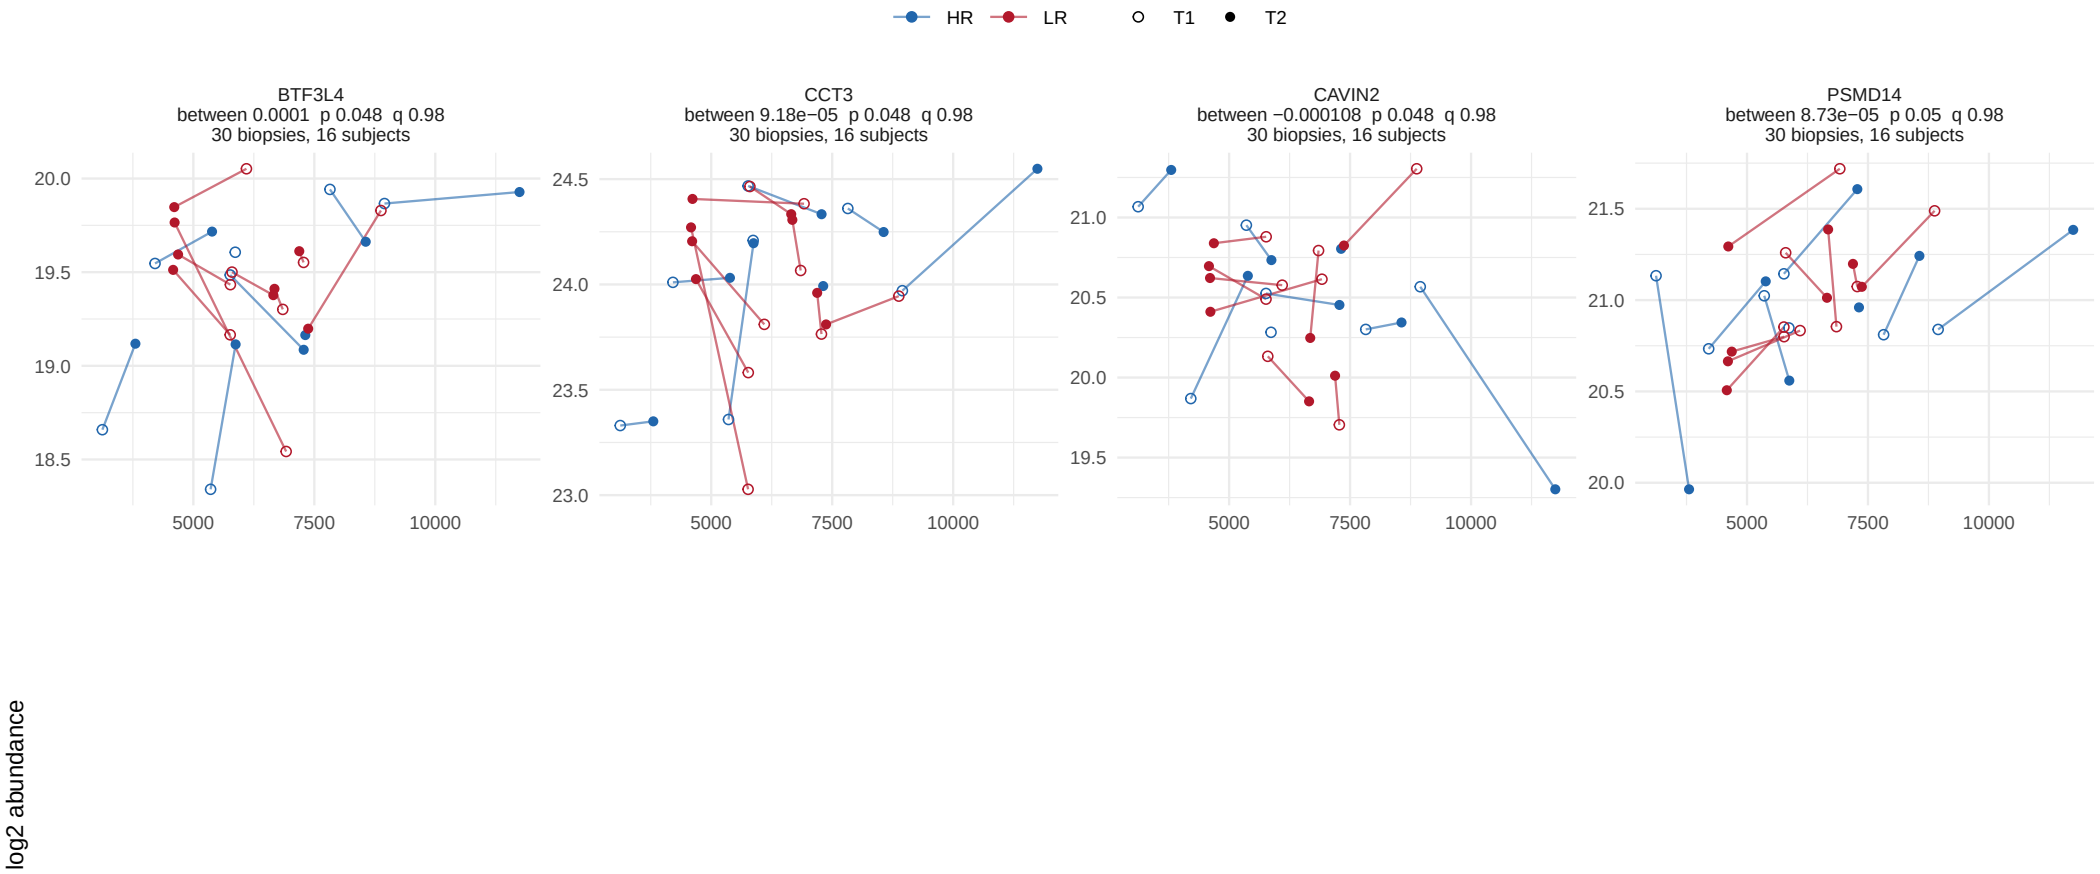

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

mcsa, within−person term


47 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 1 of 4.

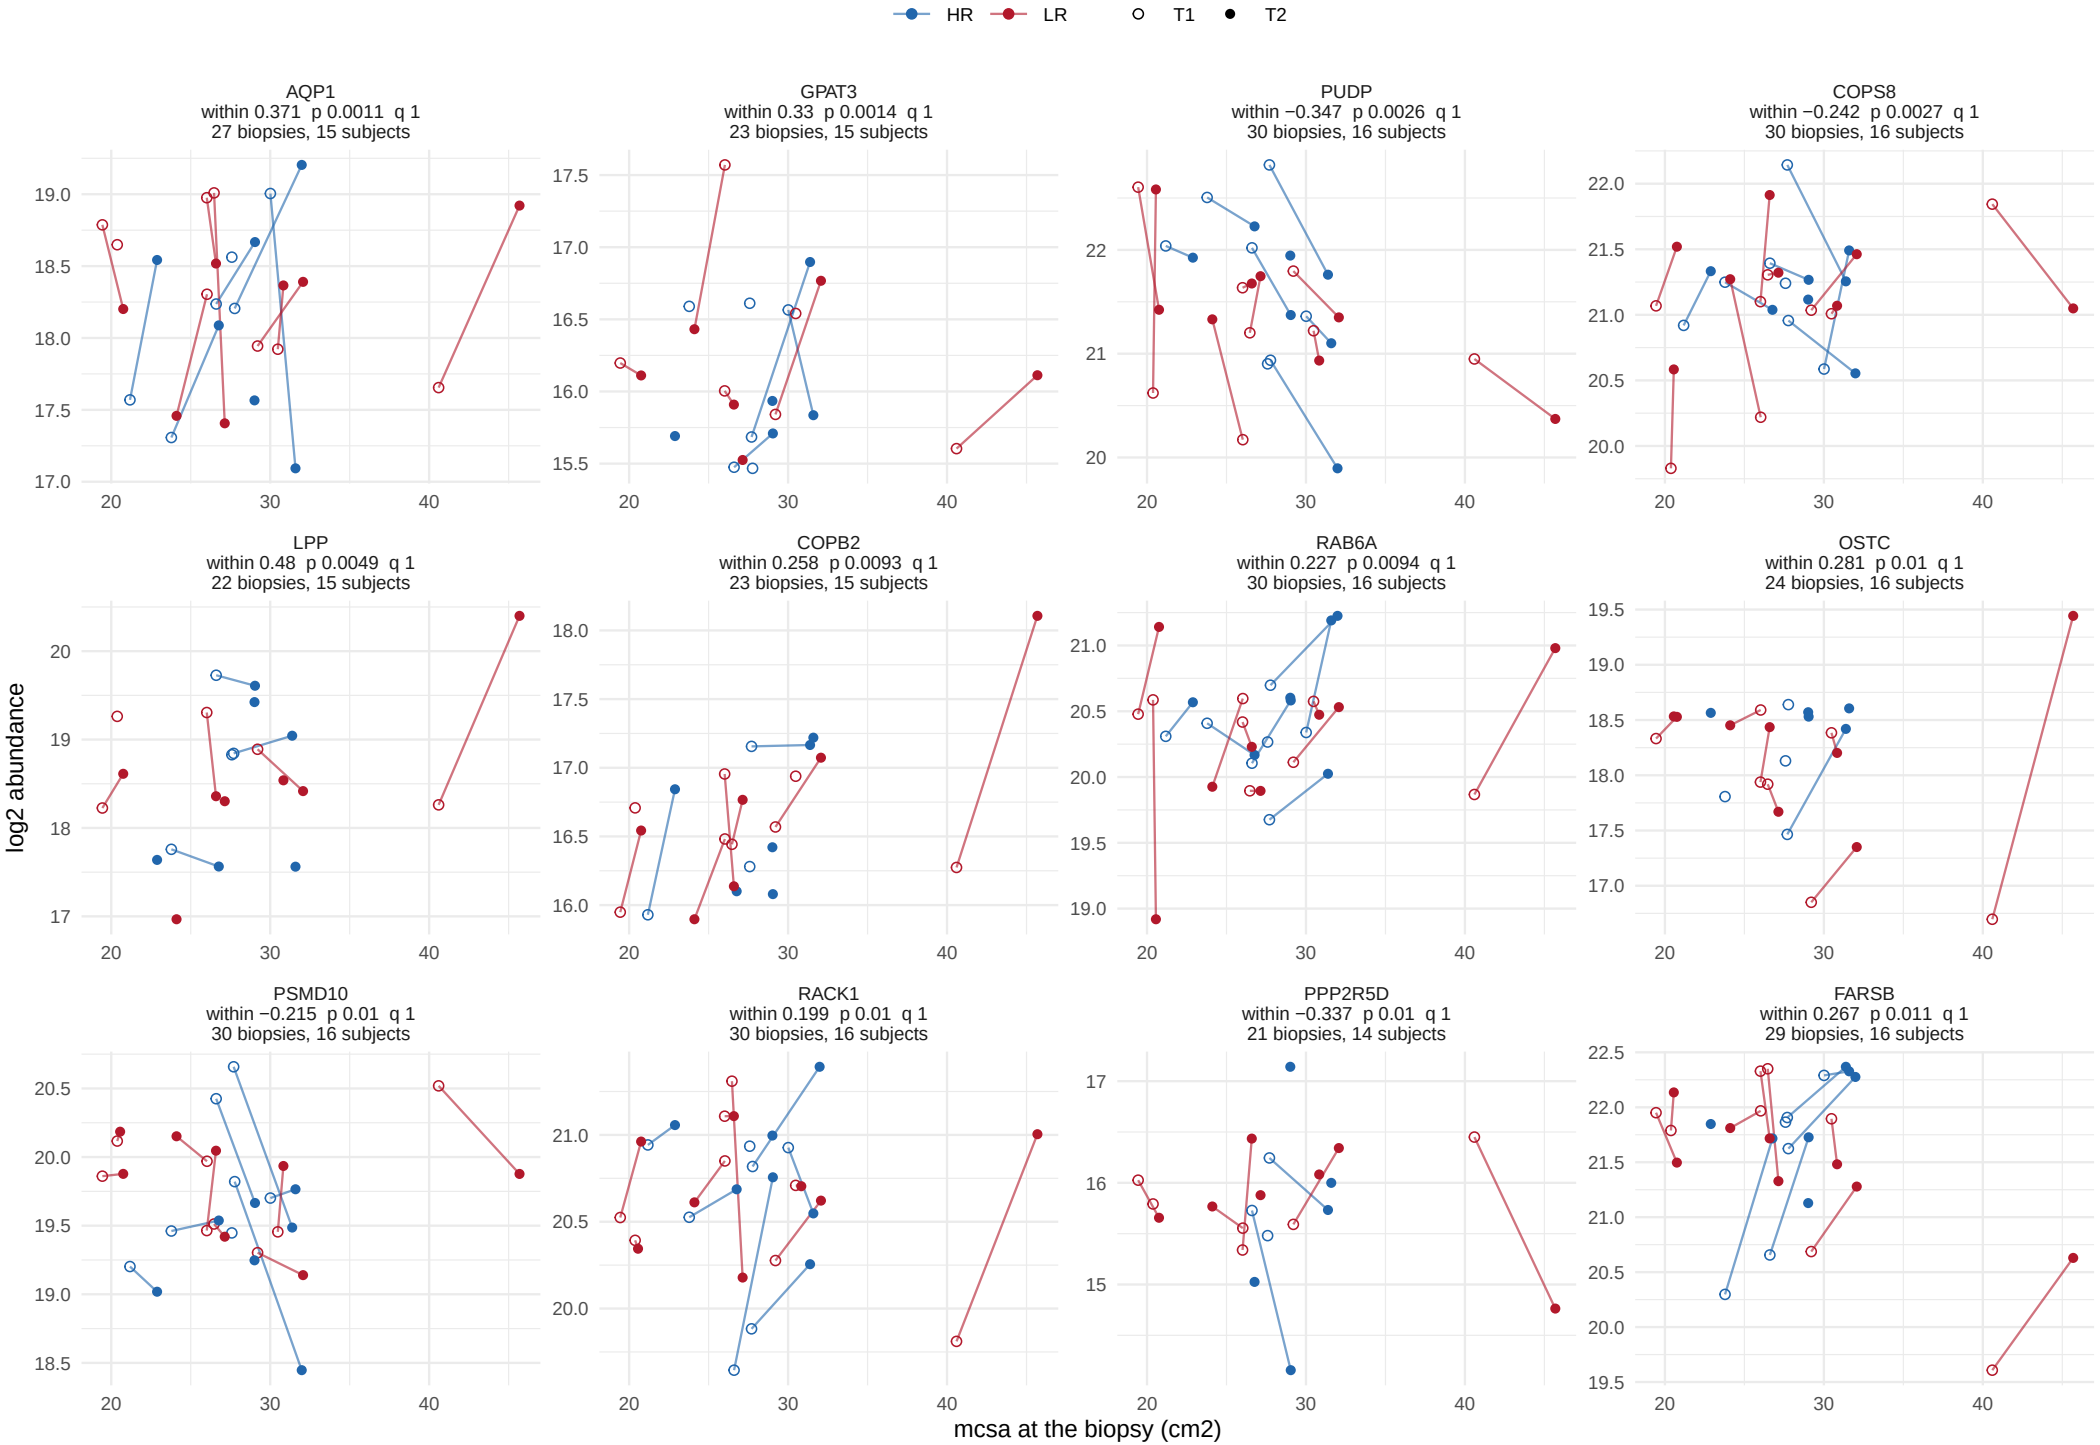

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

mcsa, within−person term

47 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 2 of 4.

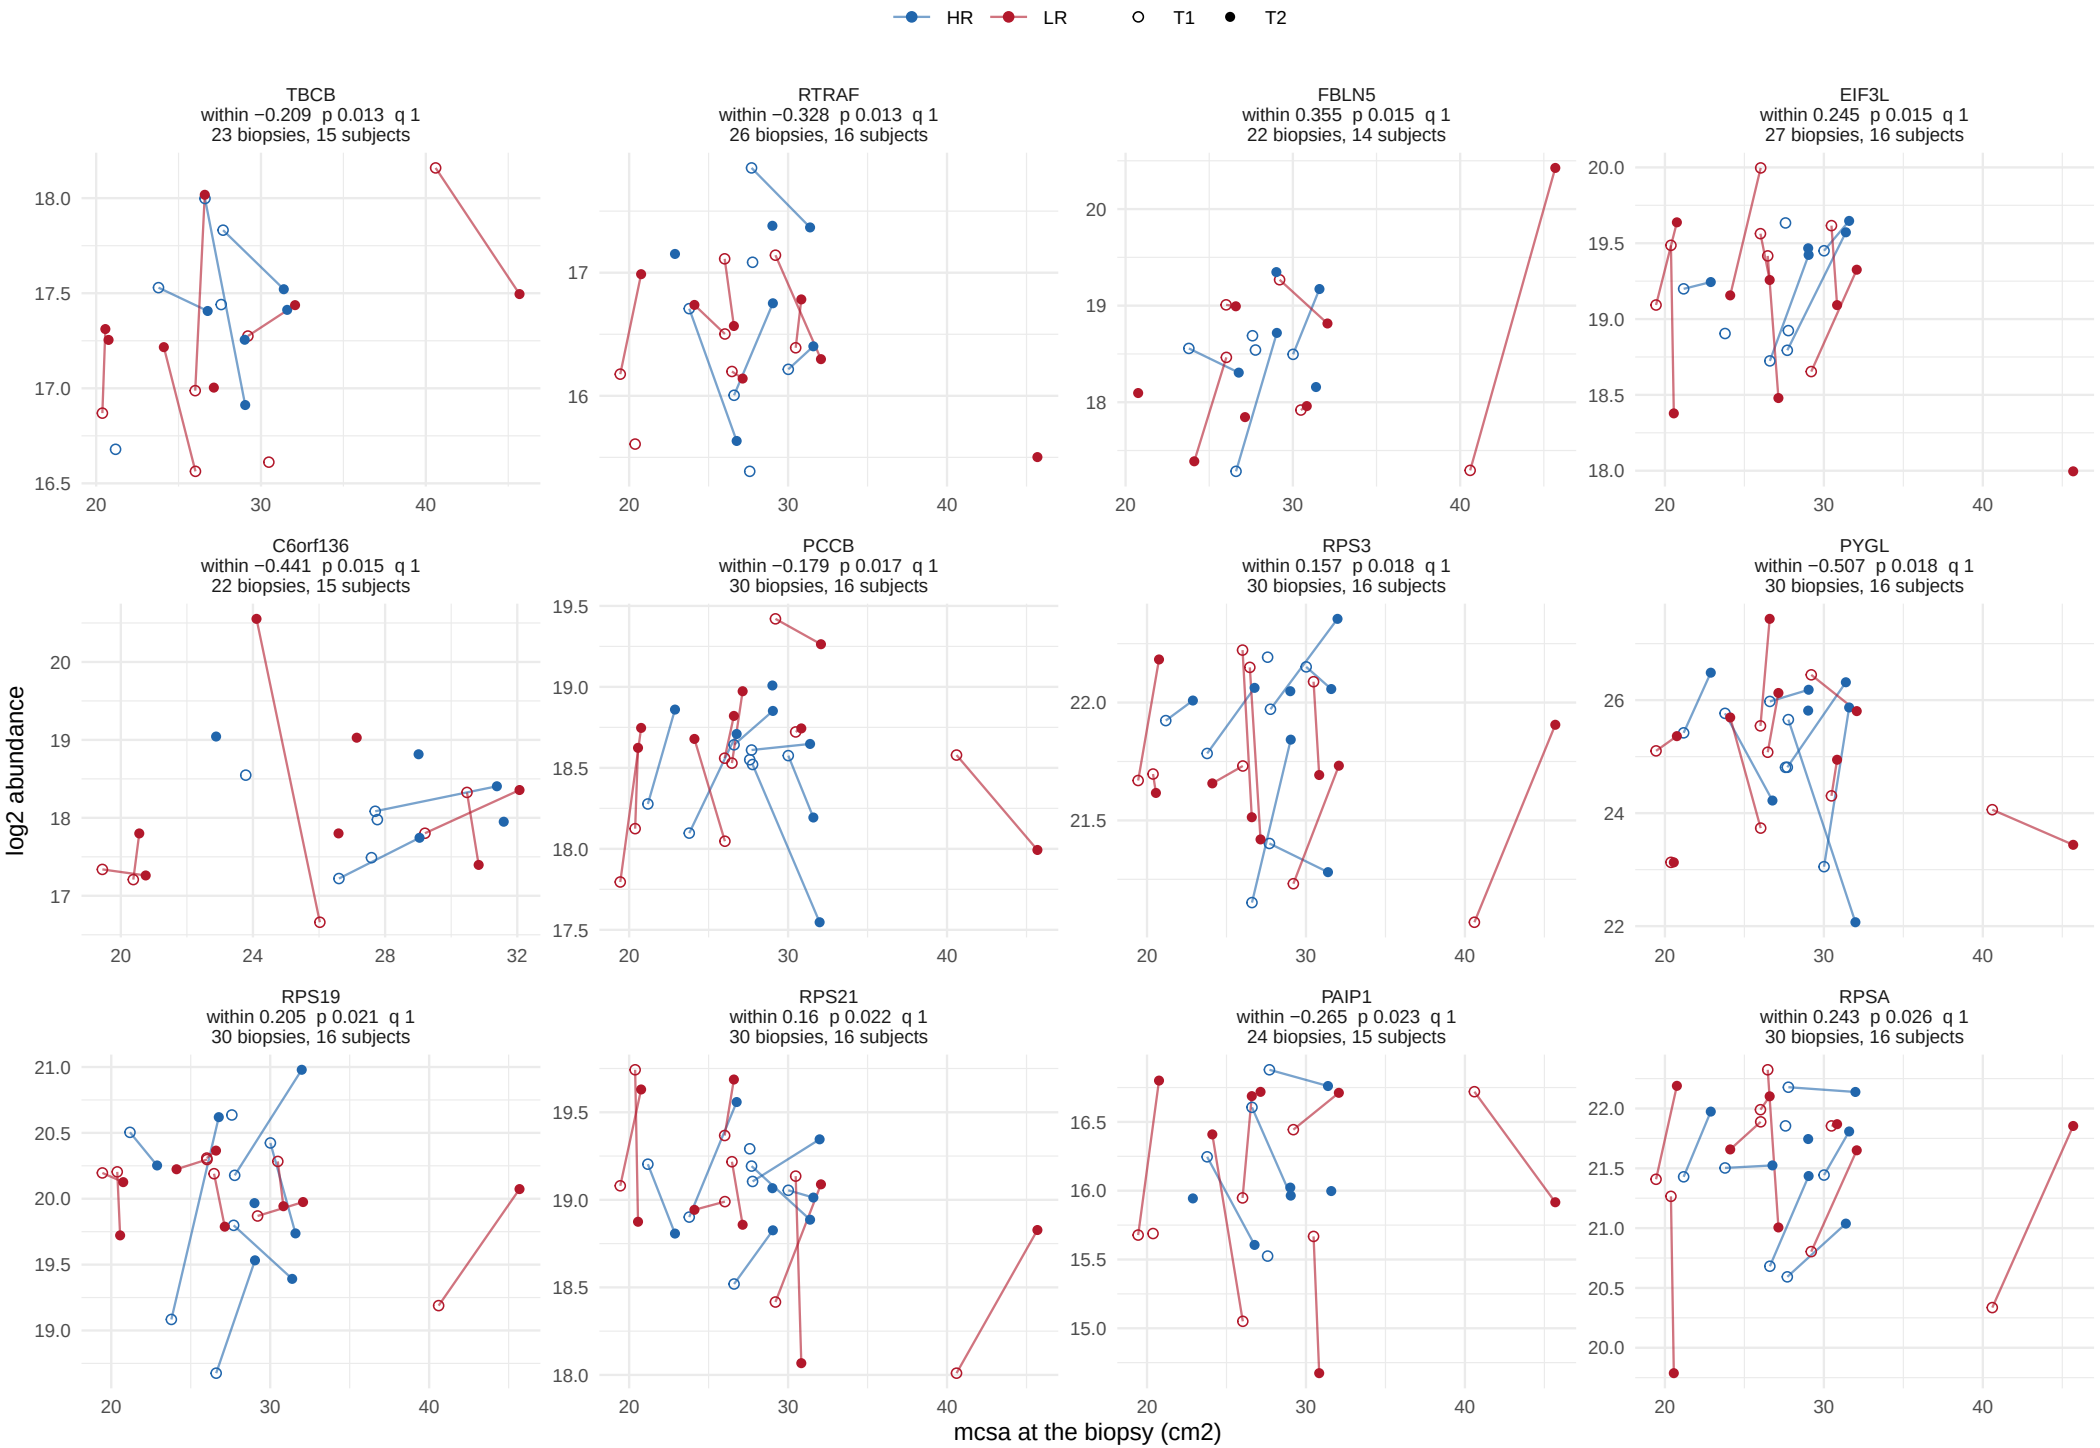

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

mcsa, within−person term


47 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 3 of 4.



limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

mcsa, within−person term


47 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 4 of 4.

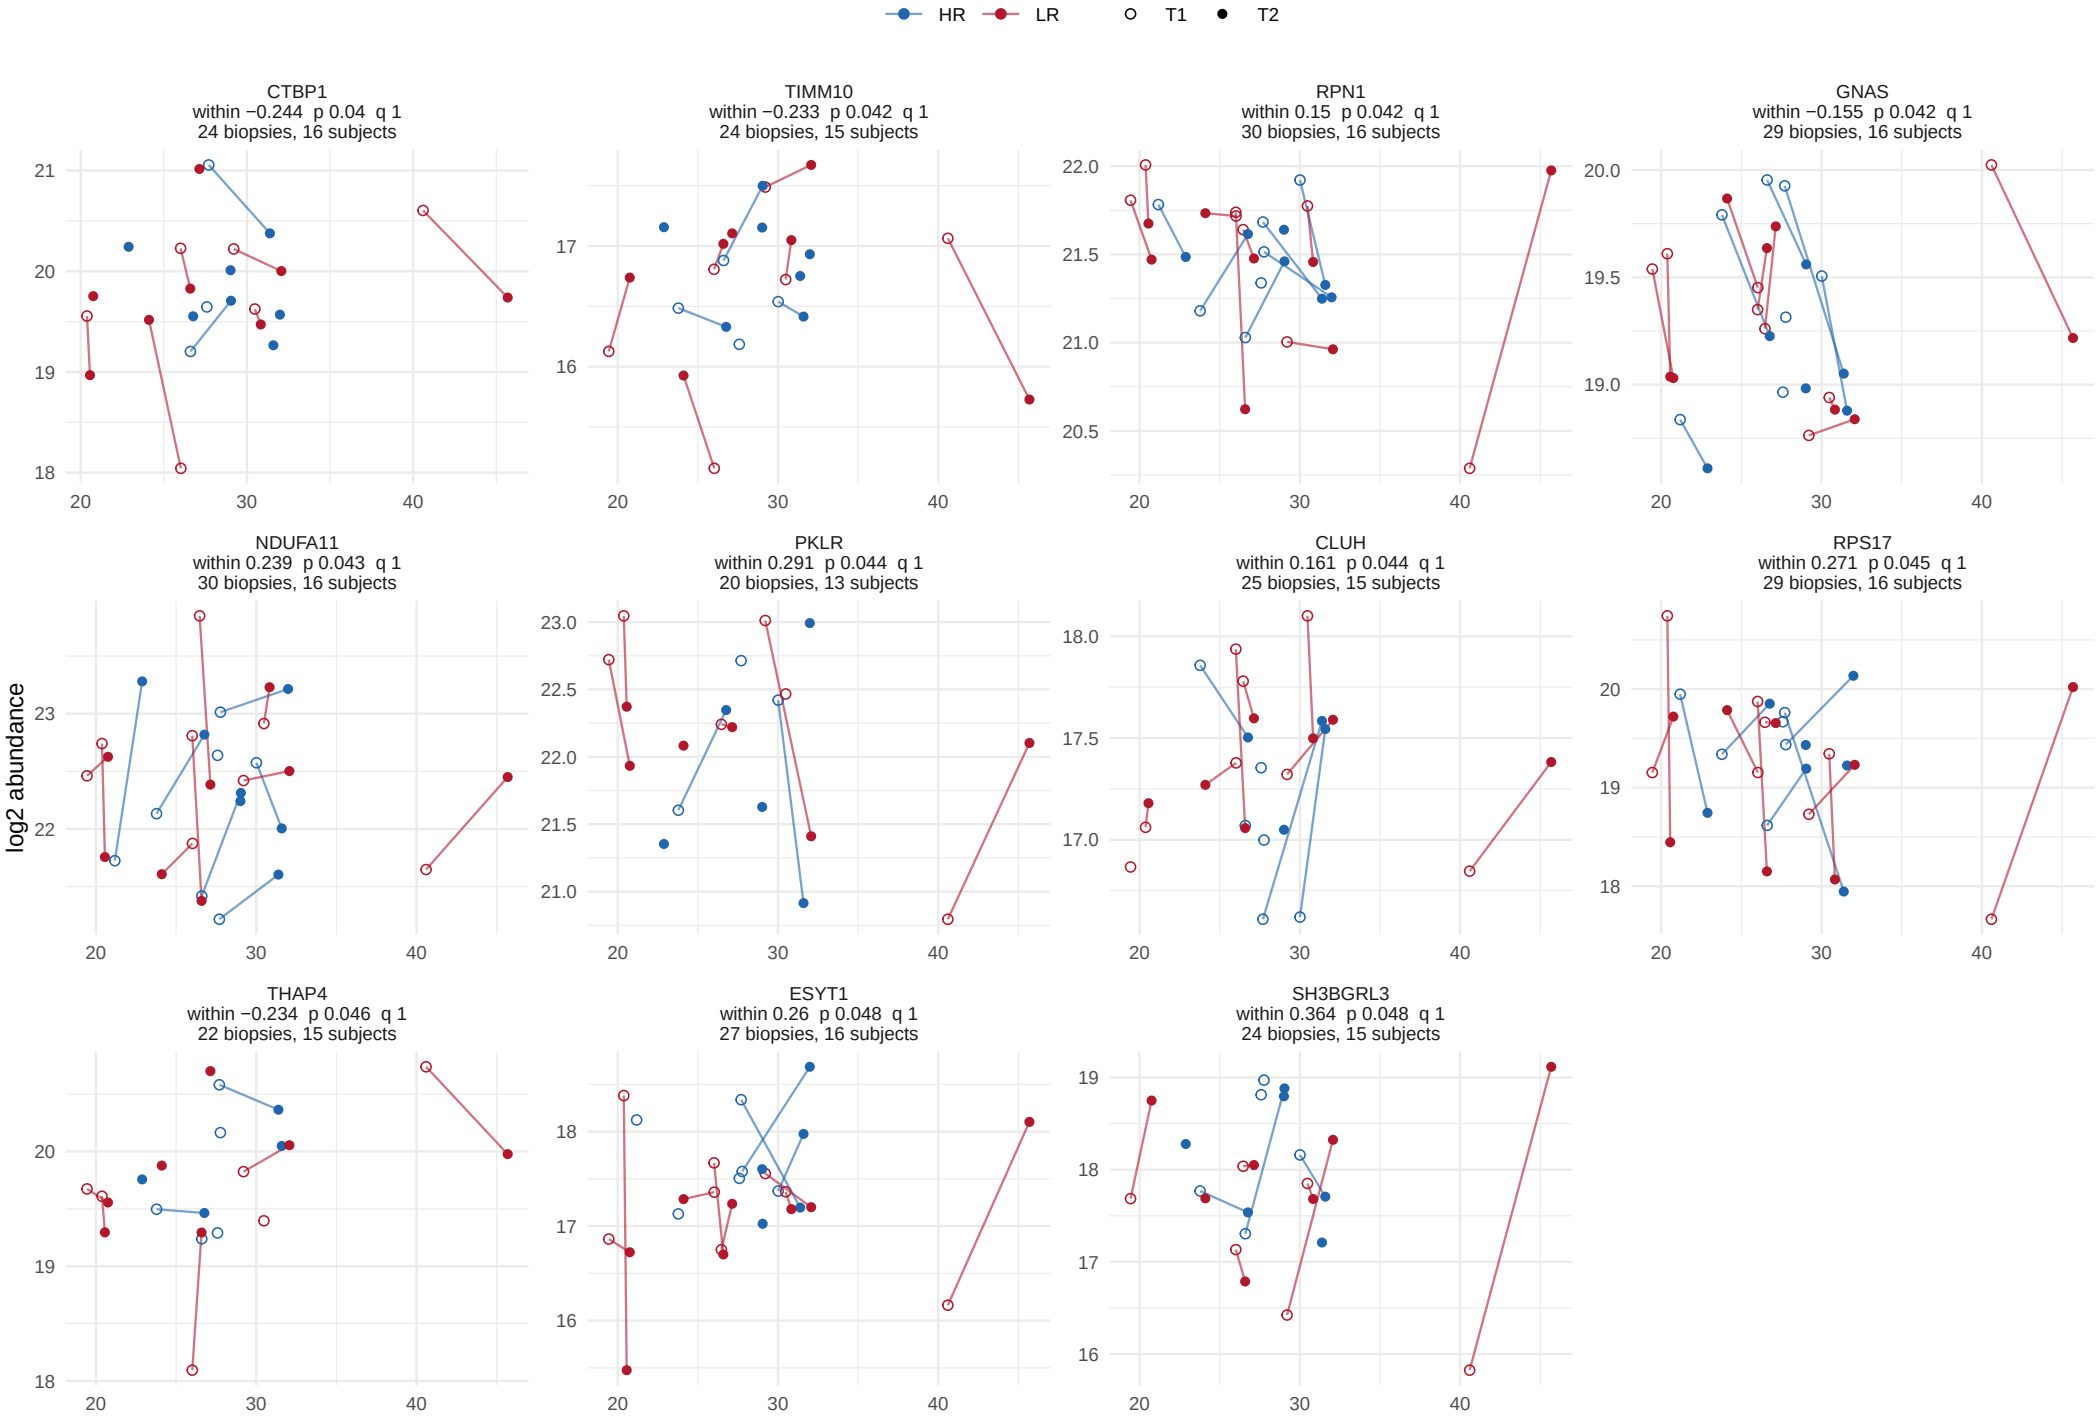

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

mcsa, between−person term


150 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 1 of 13.

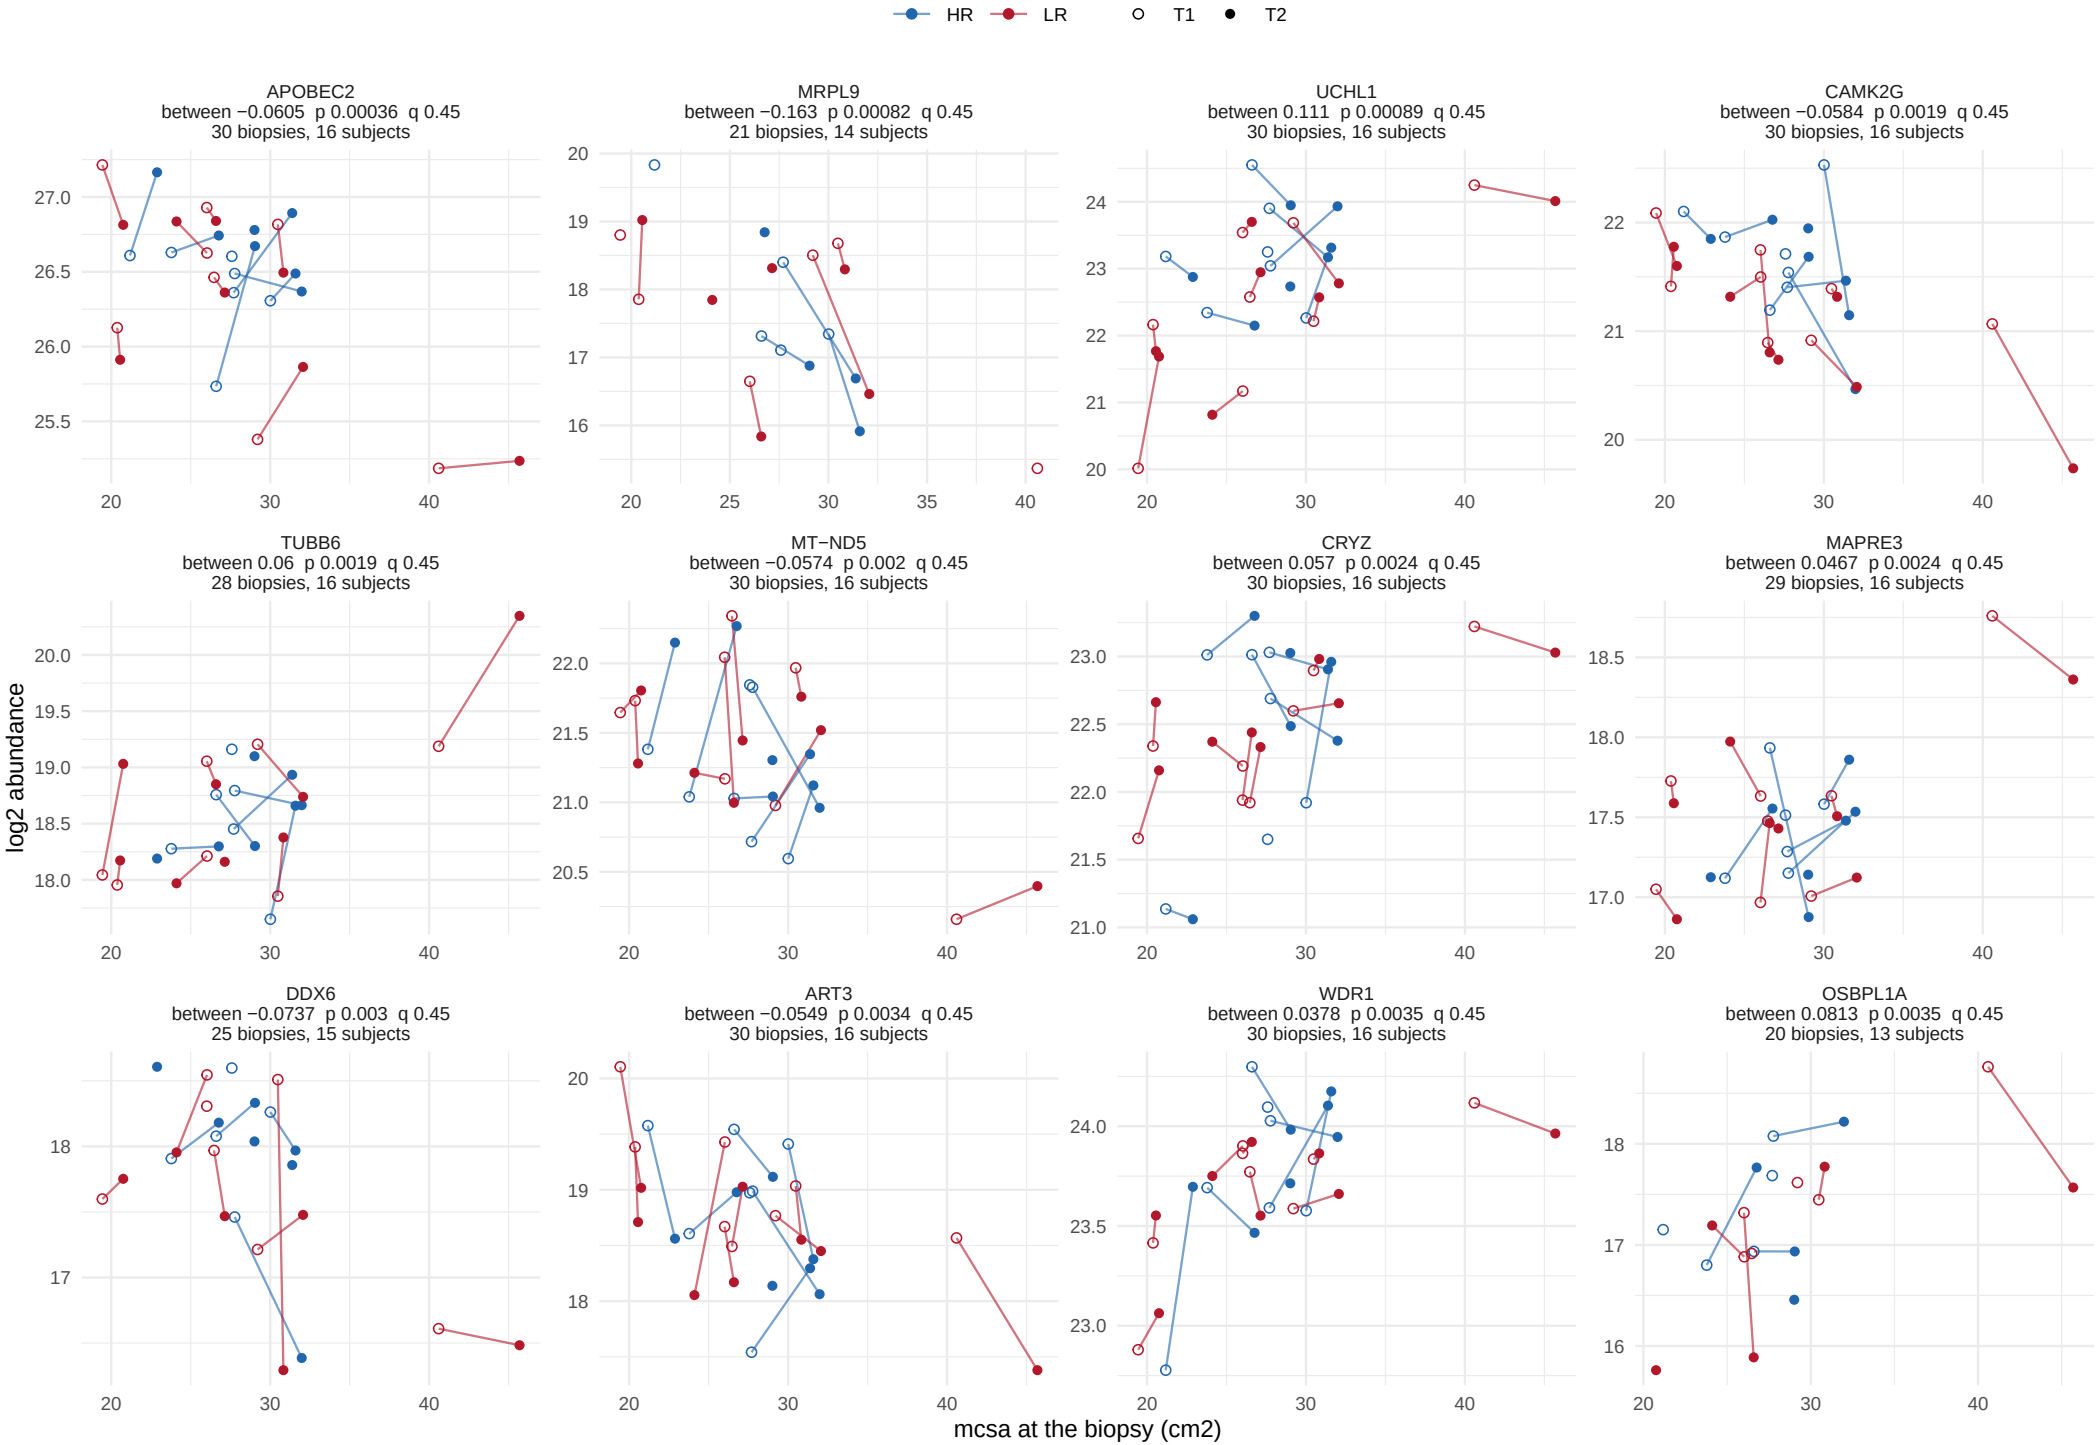

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

mcsa, between−person term


150 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 2 of 13.

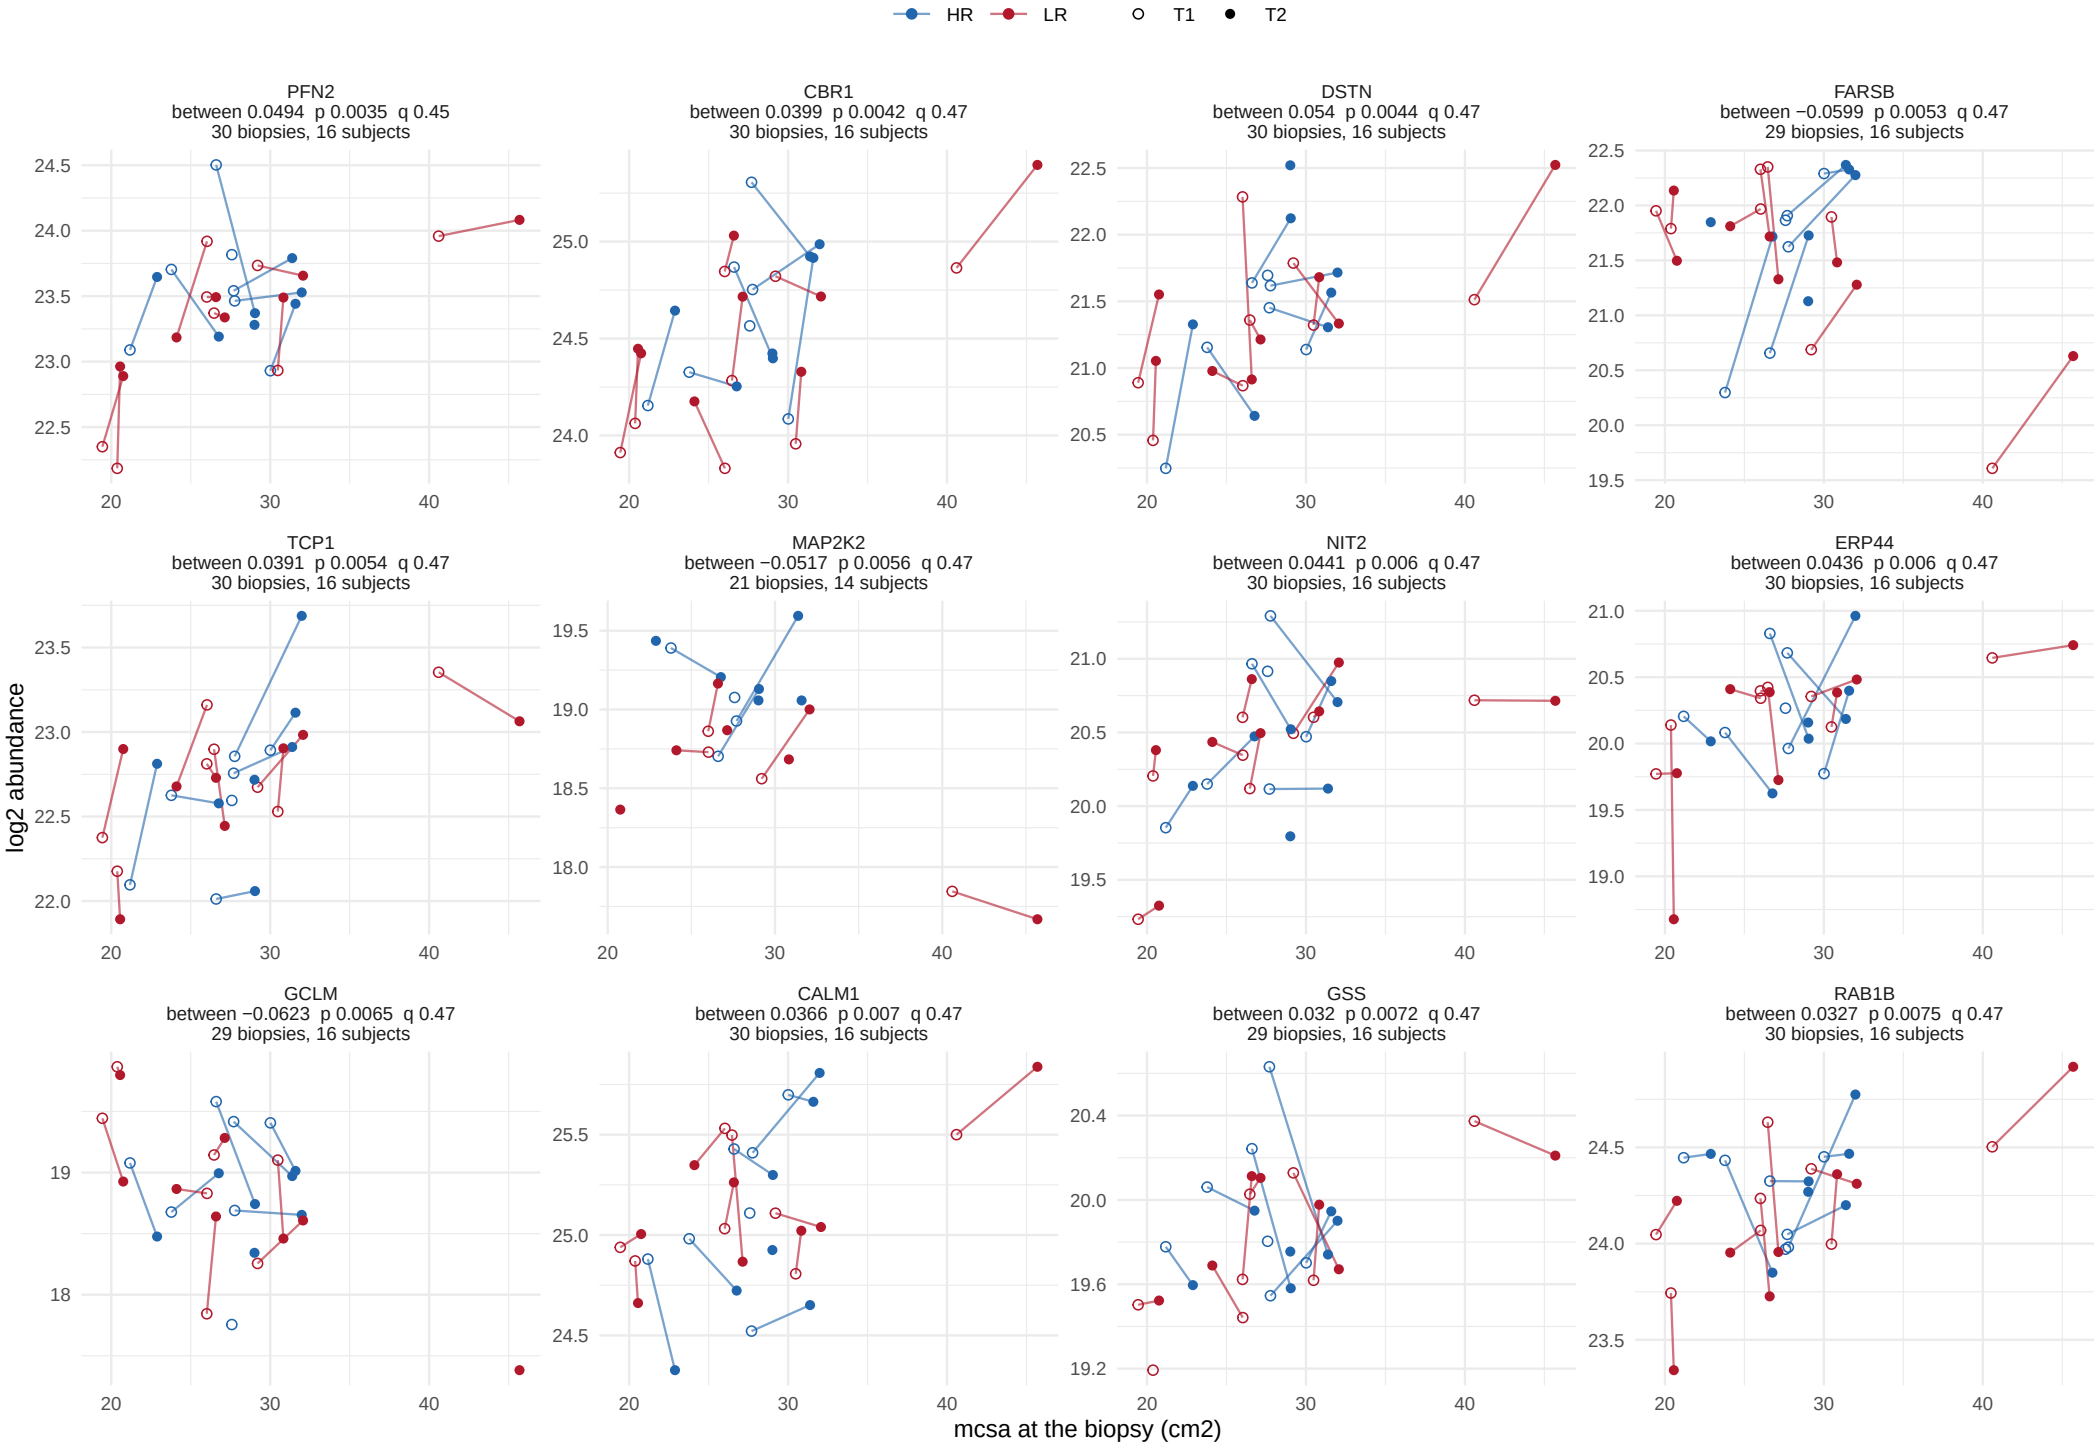

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

mcsa, between−person term


150 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 3 of 13.

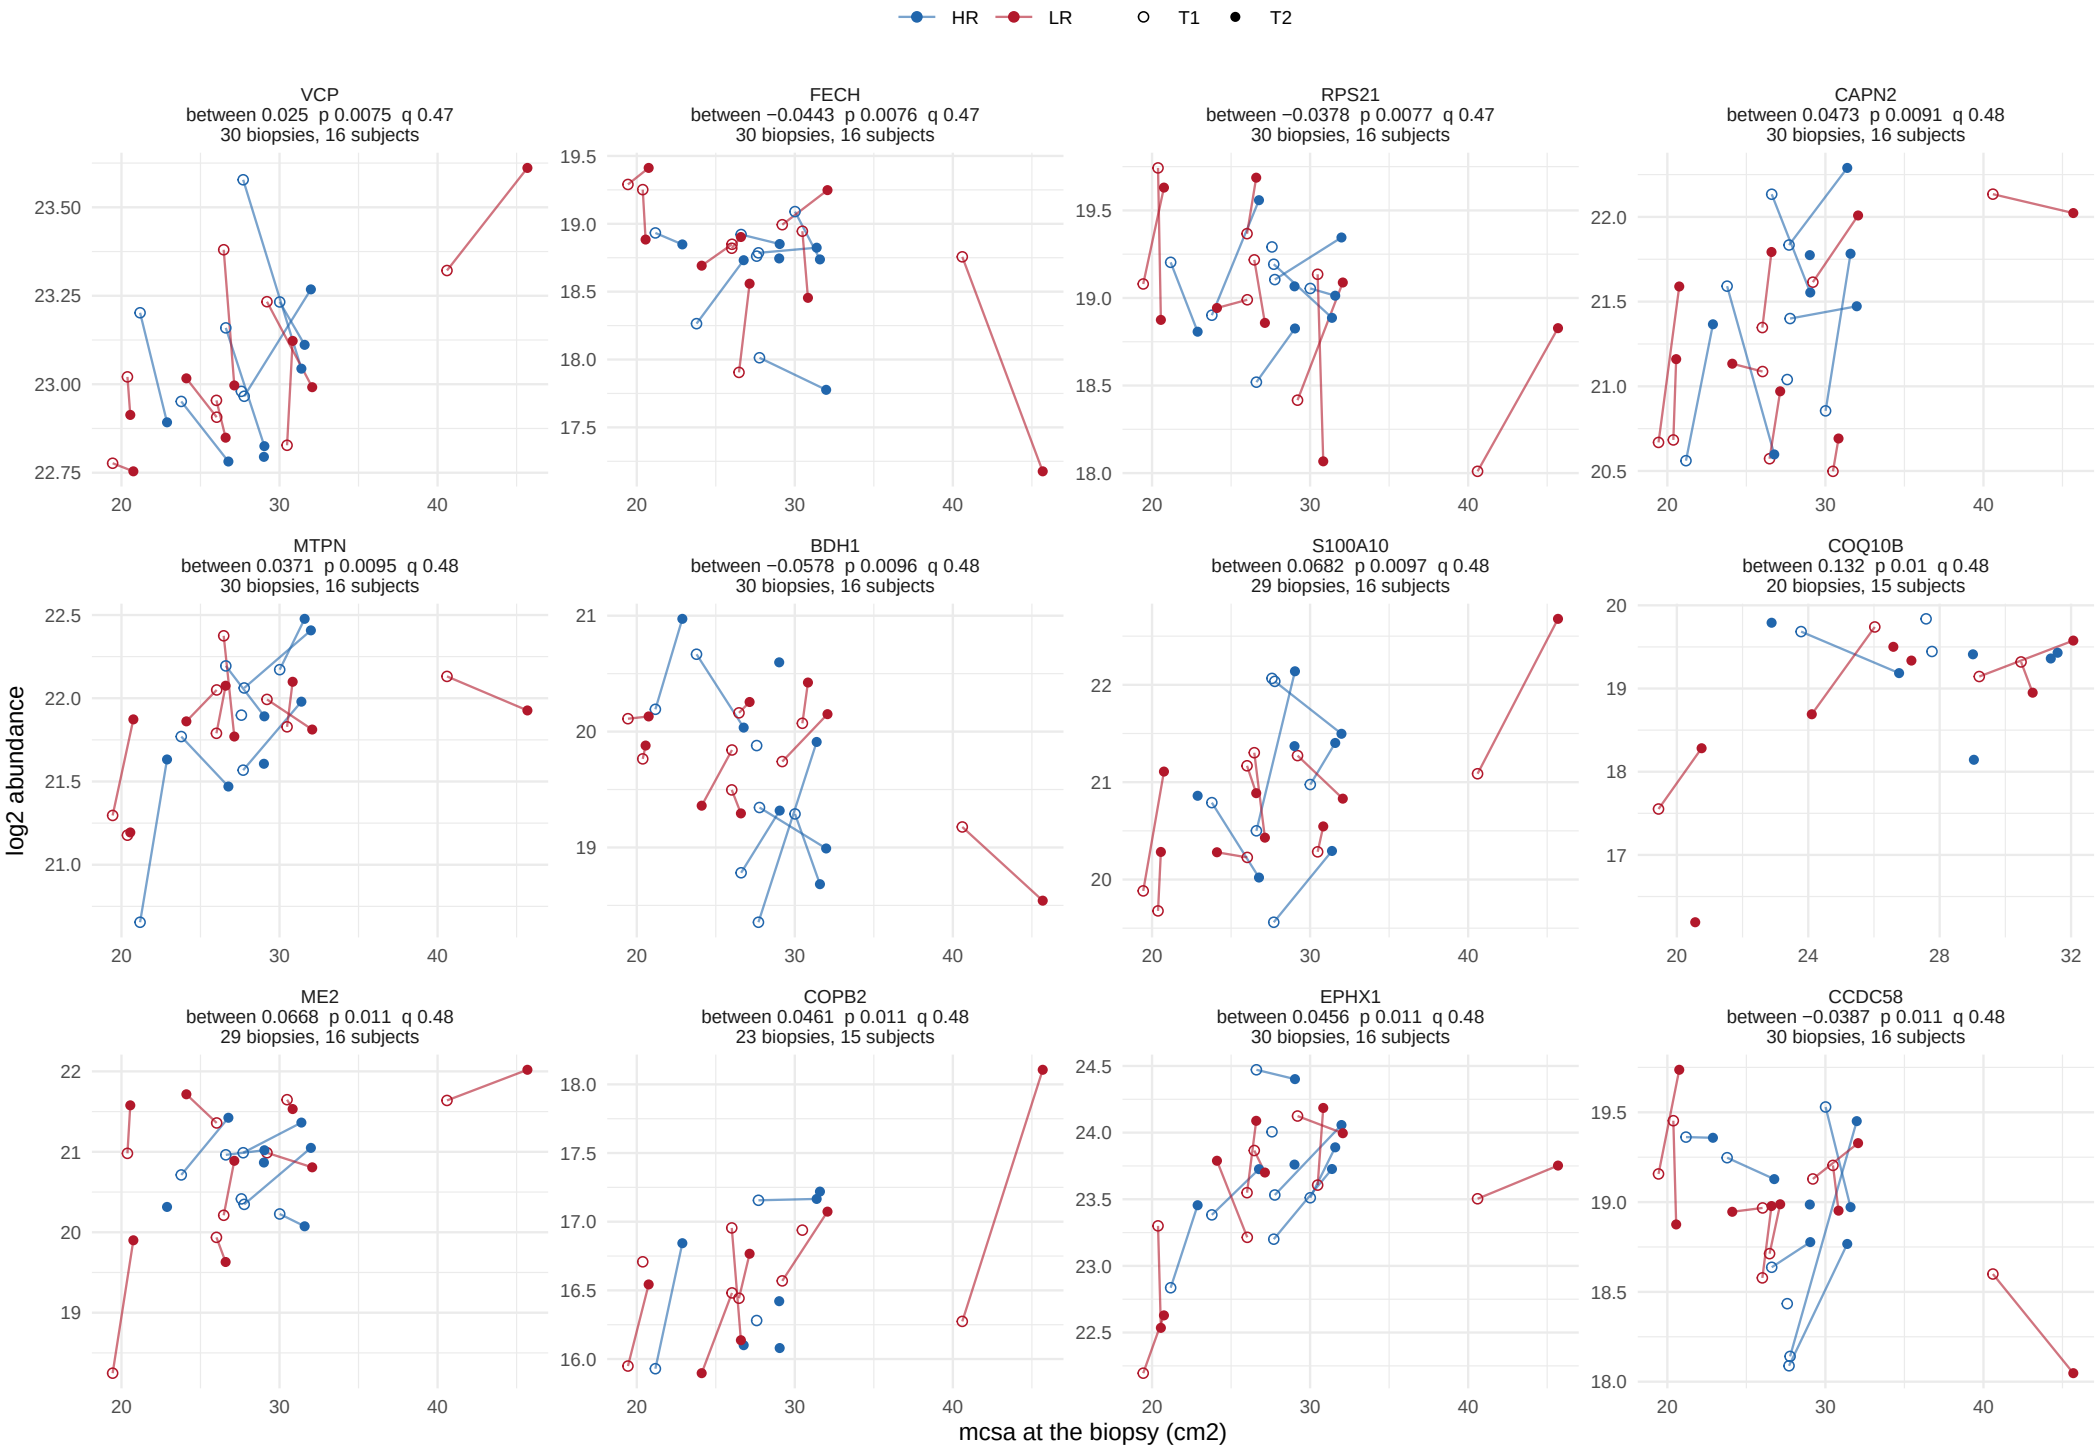

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

mcsa, between−person term


150 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 4 of 13.

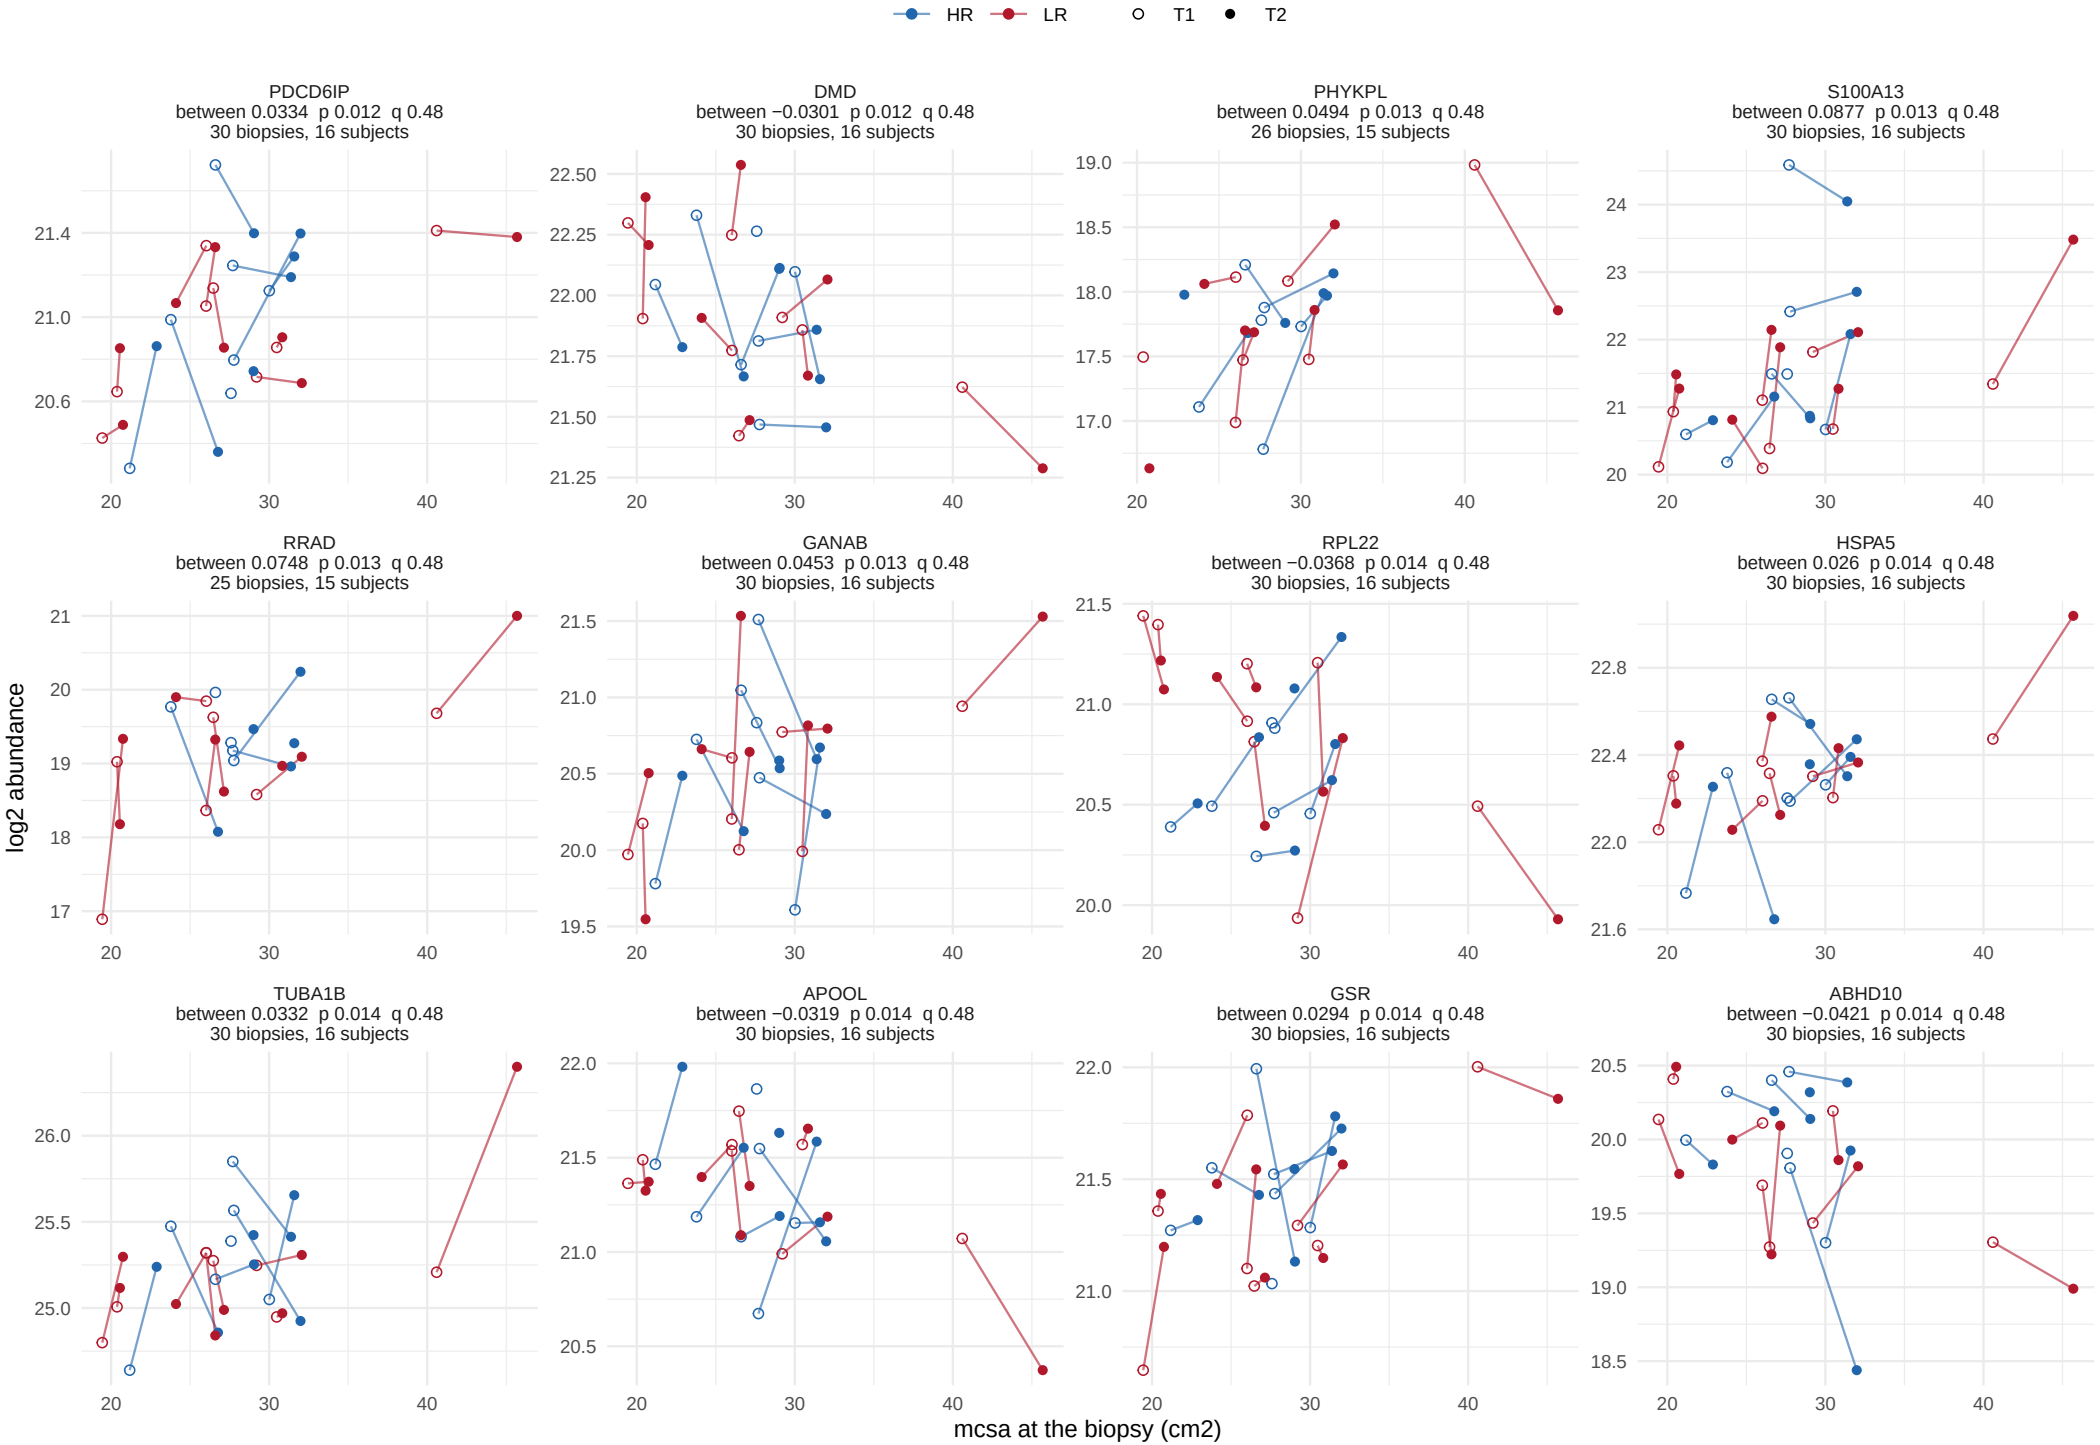

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

mcsa, between−person term


150 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 5 of 13.

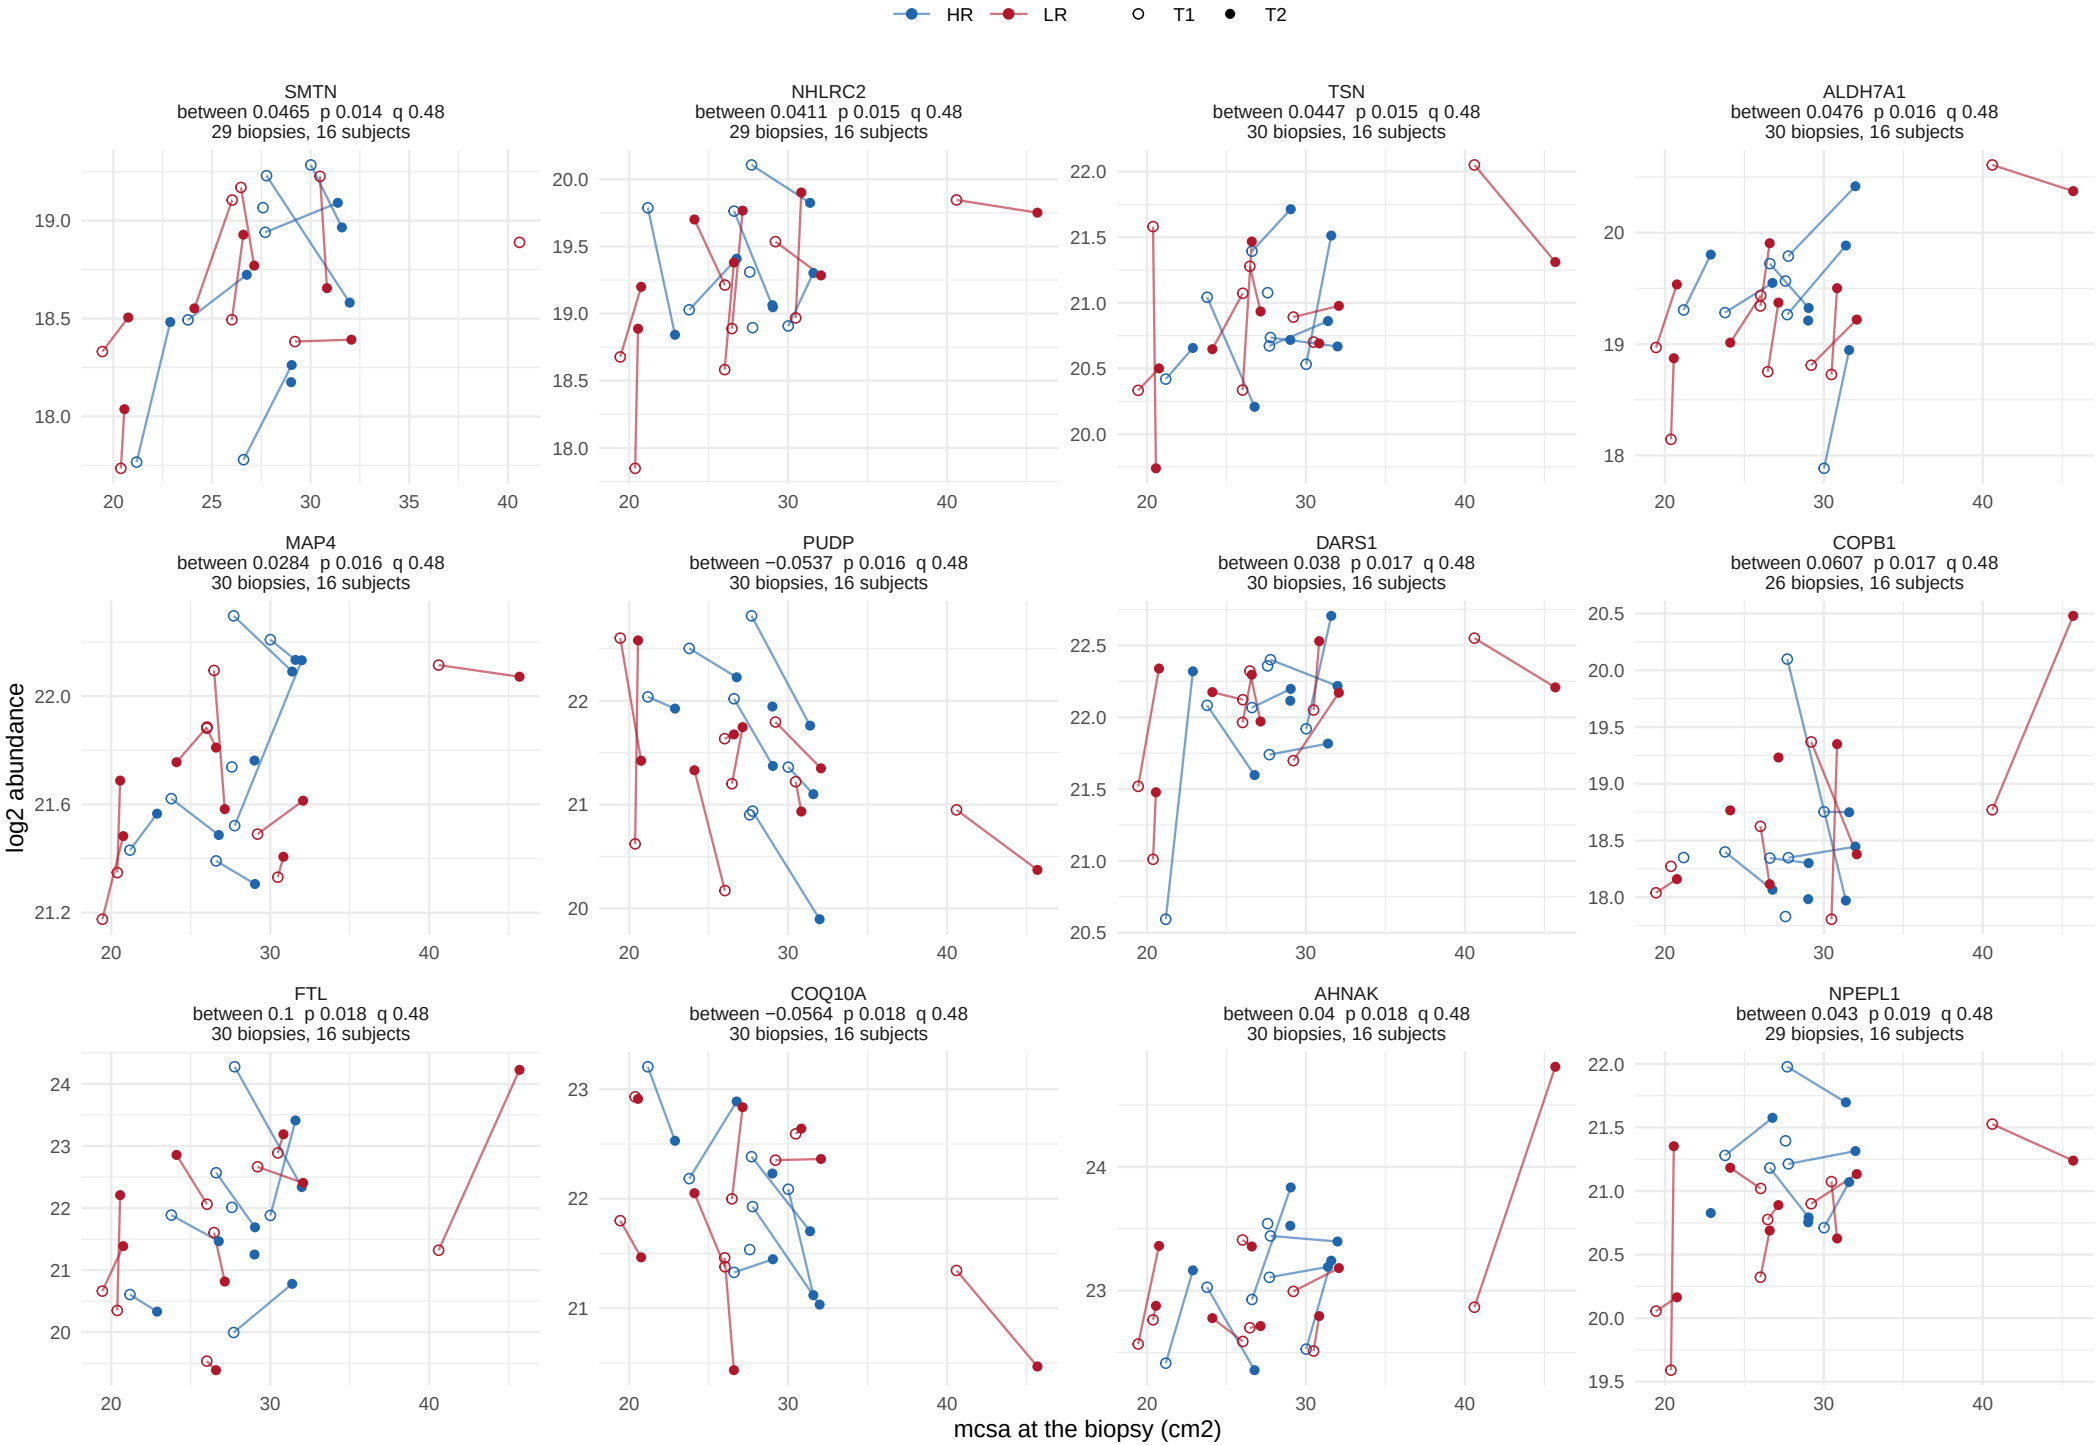

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

mcsa, between−person term


150 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 6 of 13.

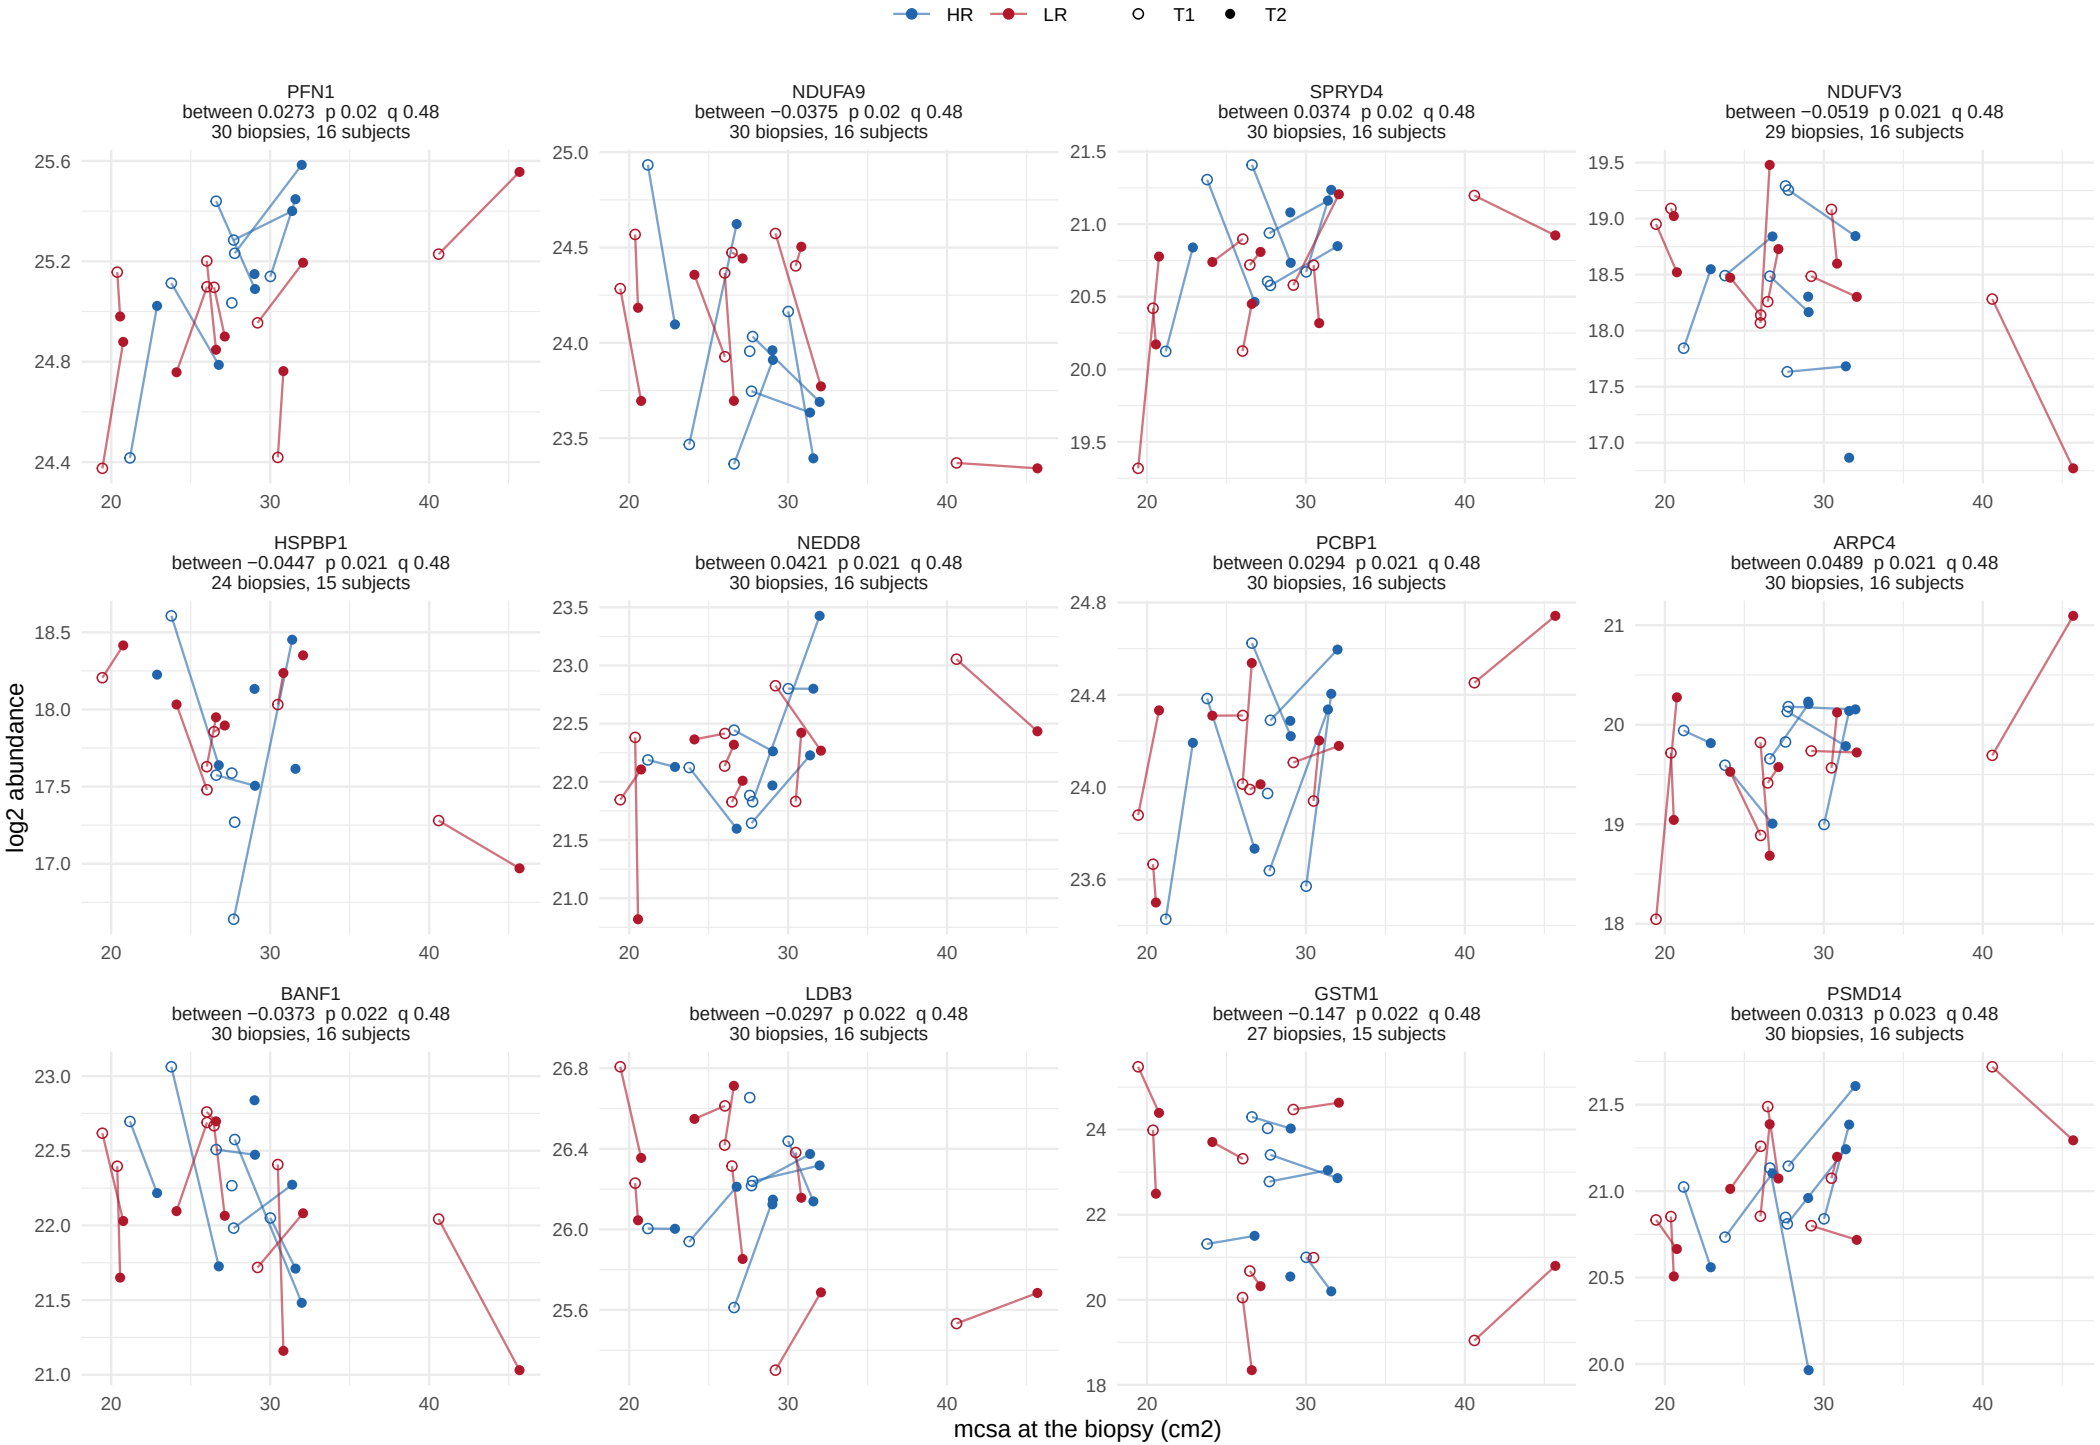

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

mcsa, between−person term


150 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 7 of 13.

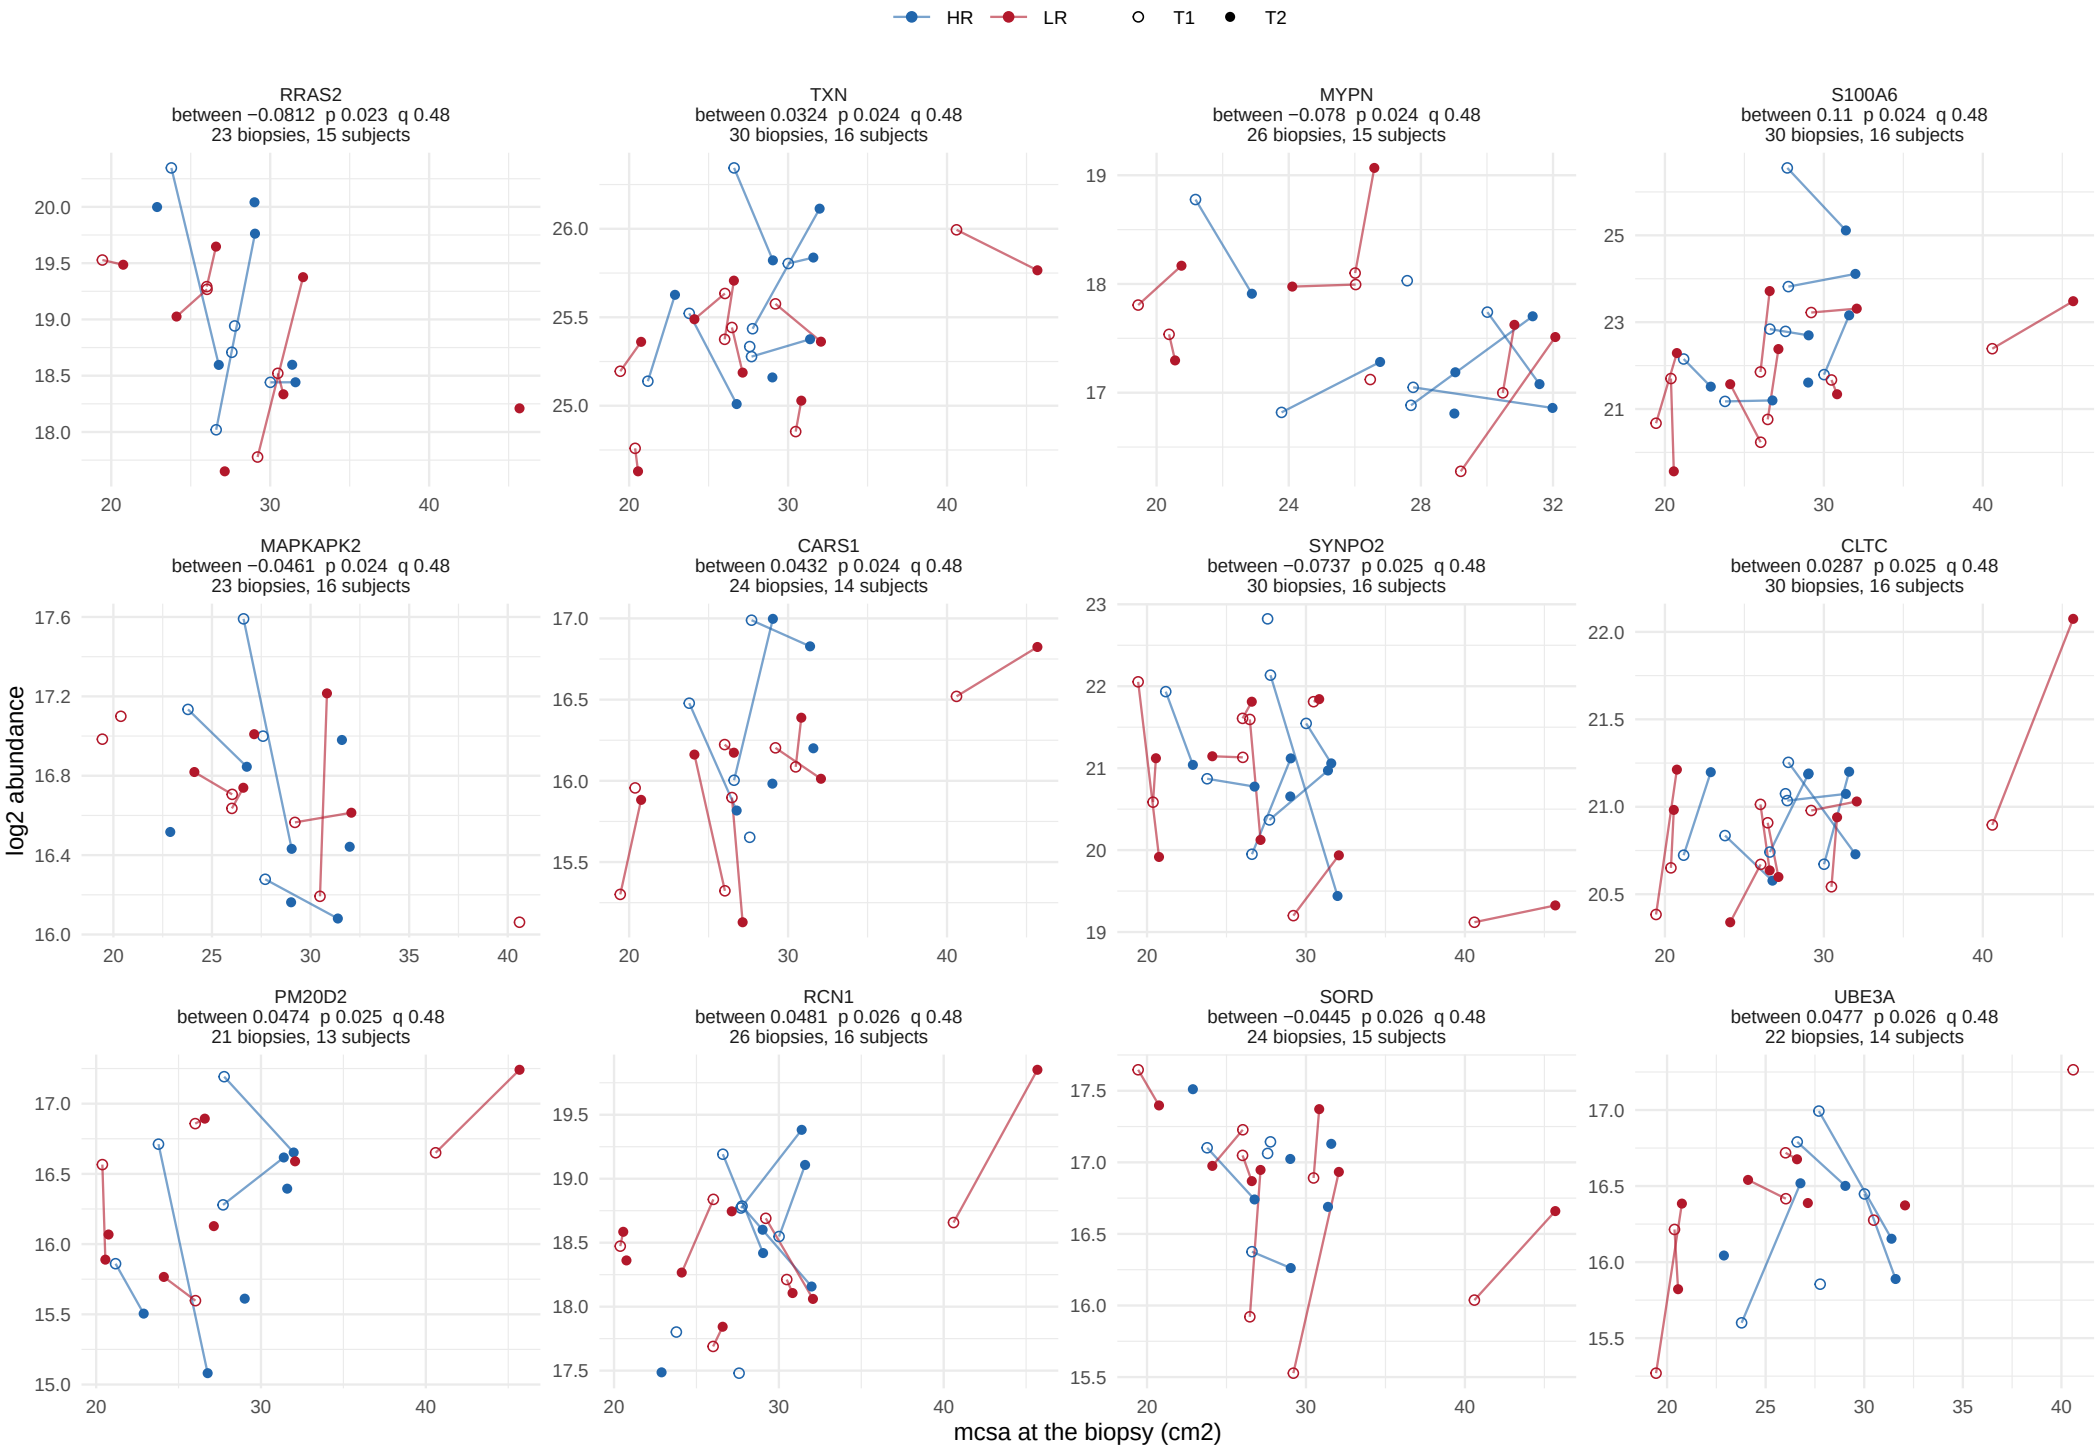

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

mcsa, between−person term


150 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 8 of 13.

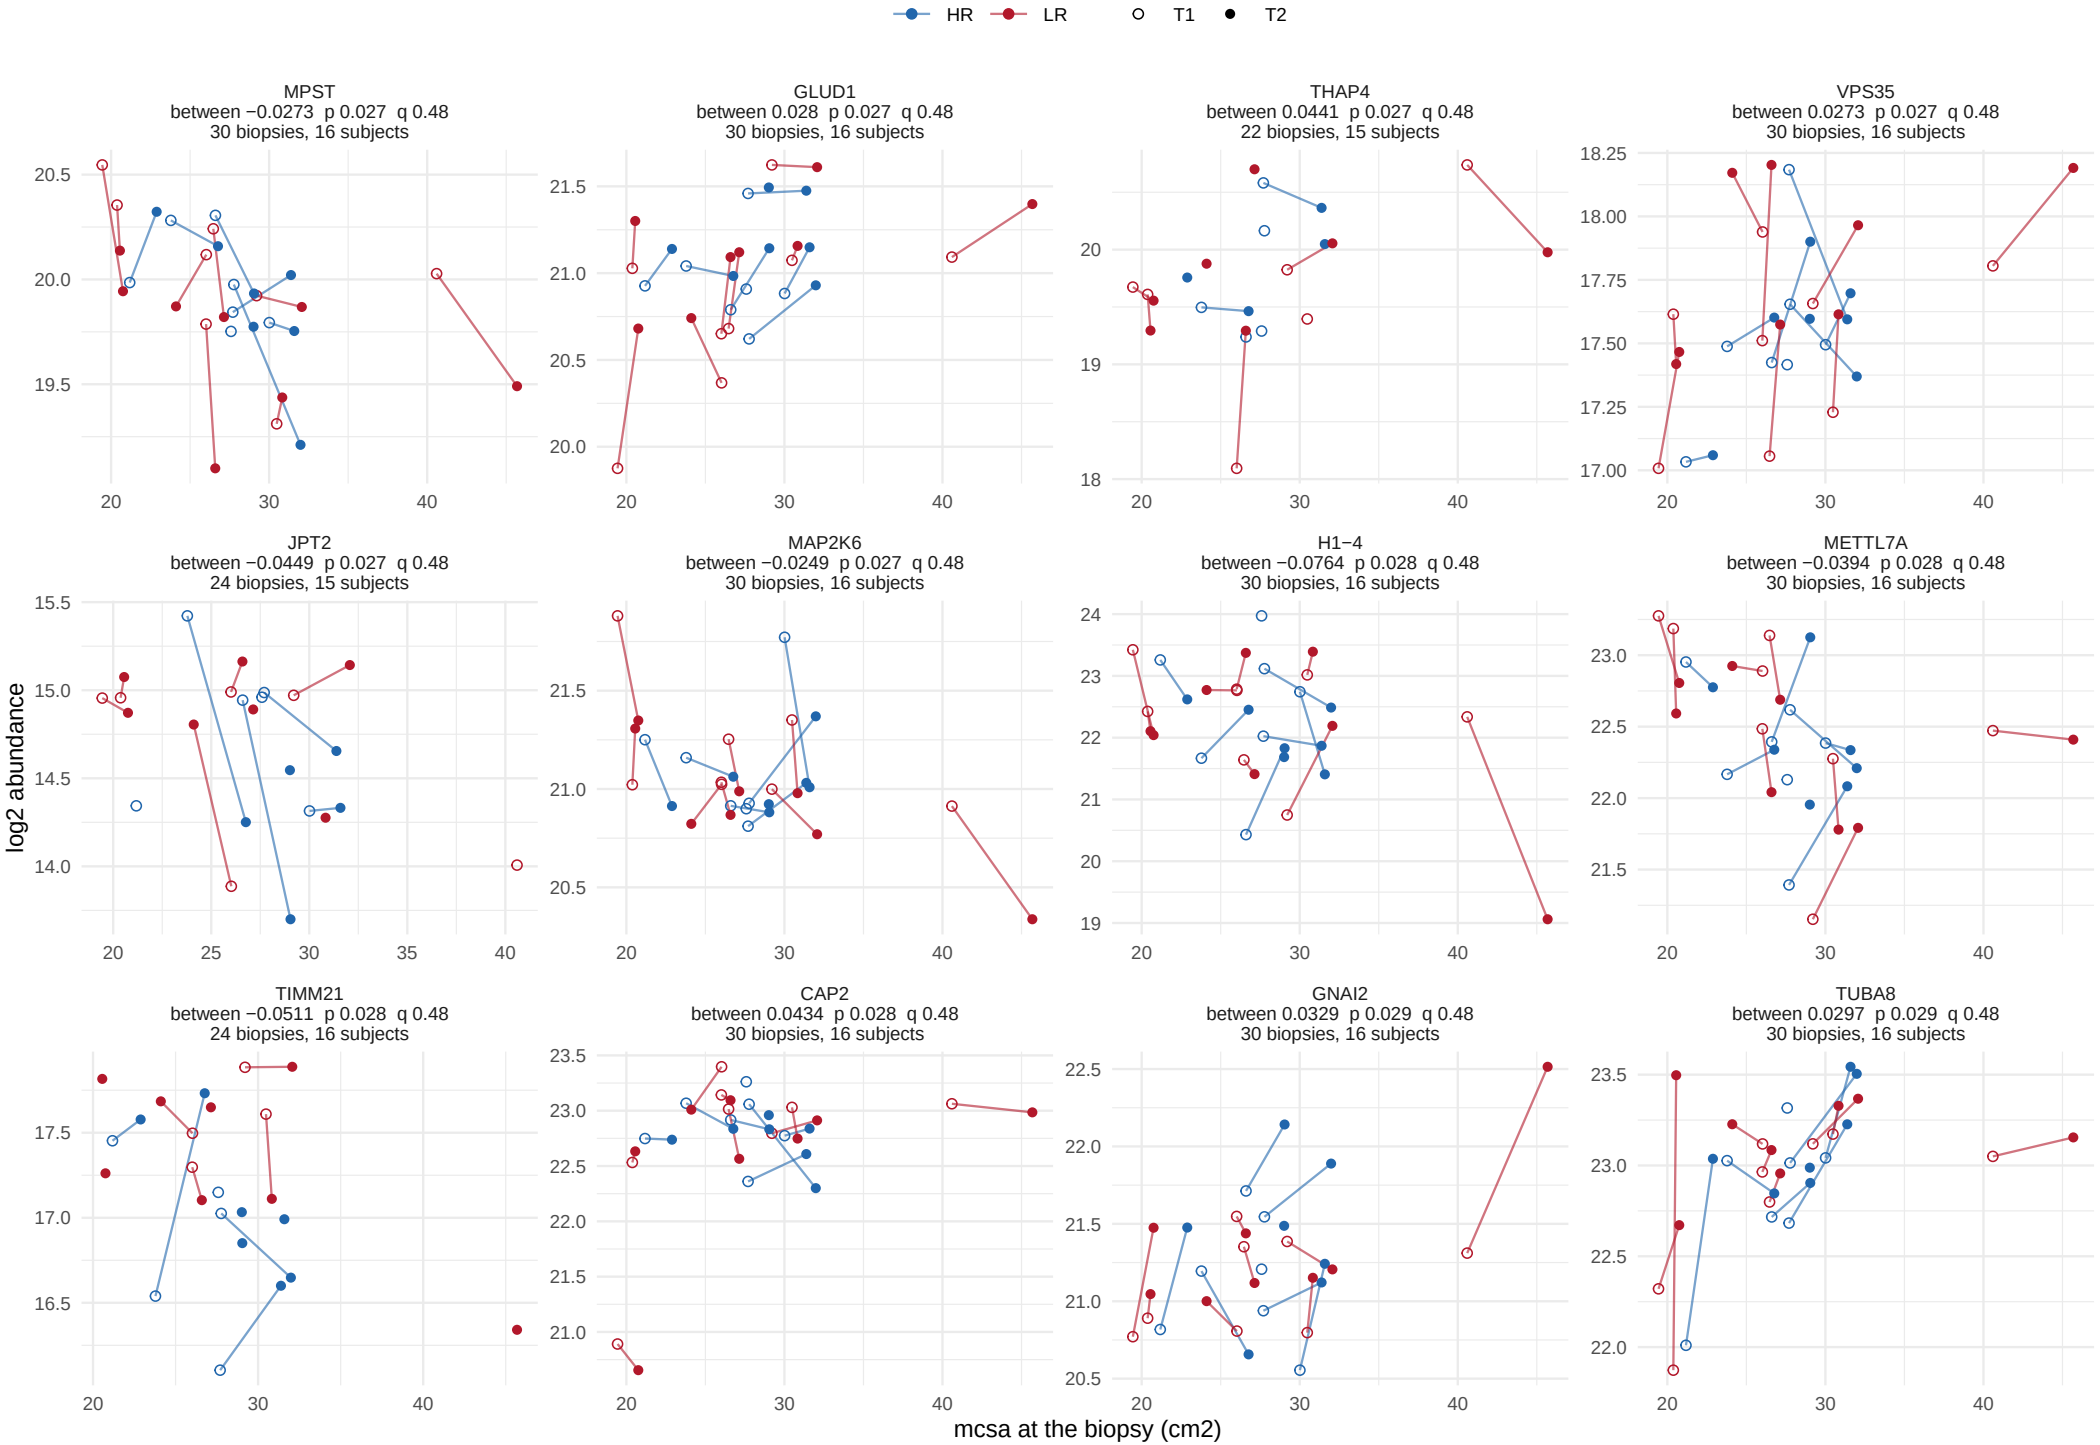

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

mcsa, between−person term


150 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 9 of 13.

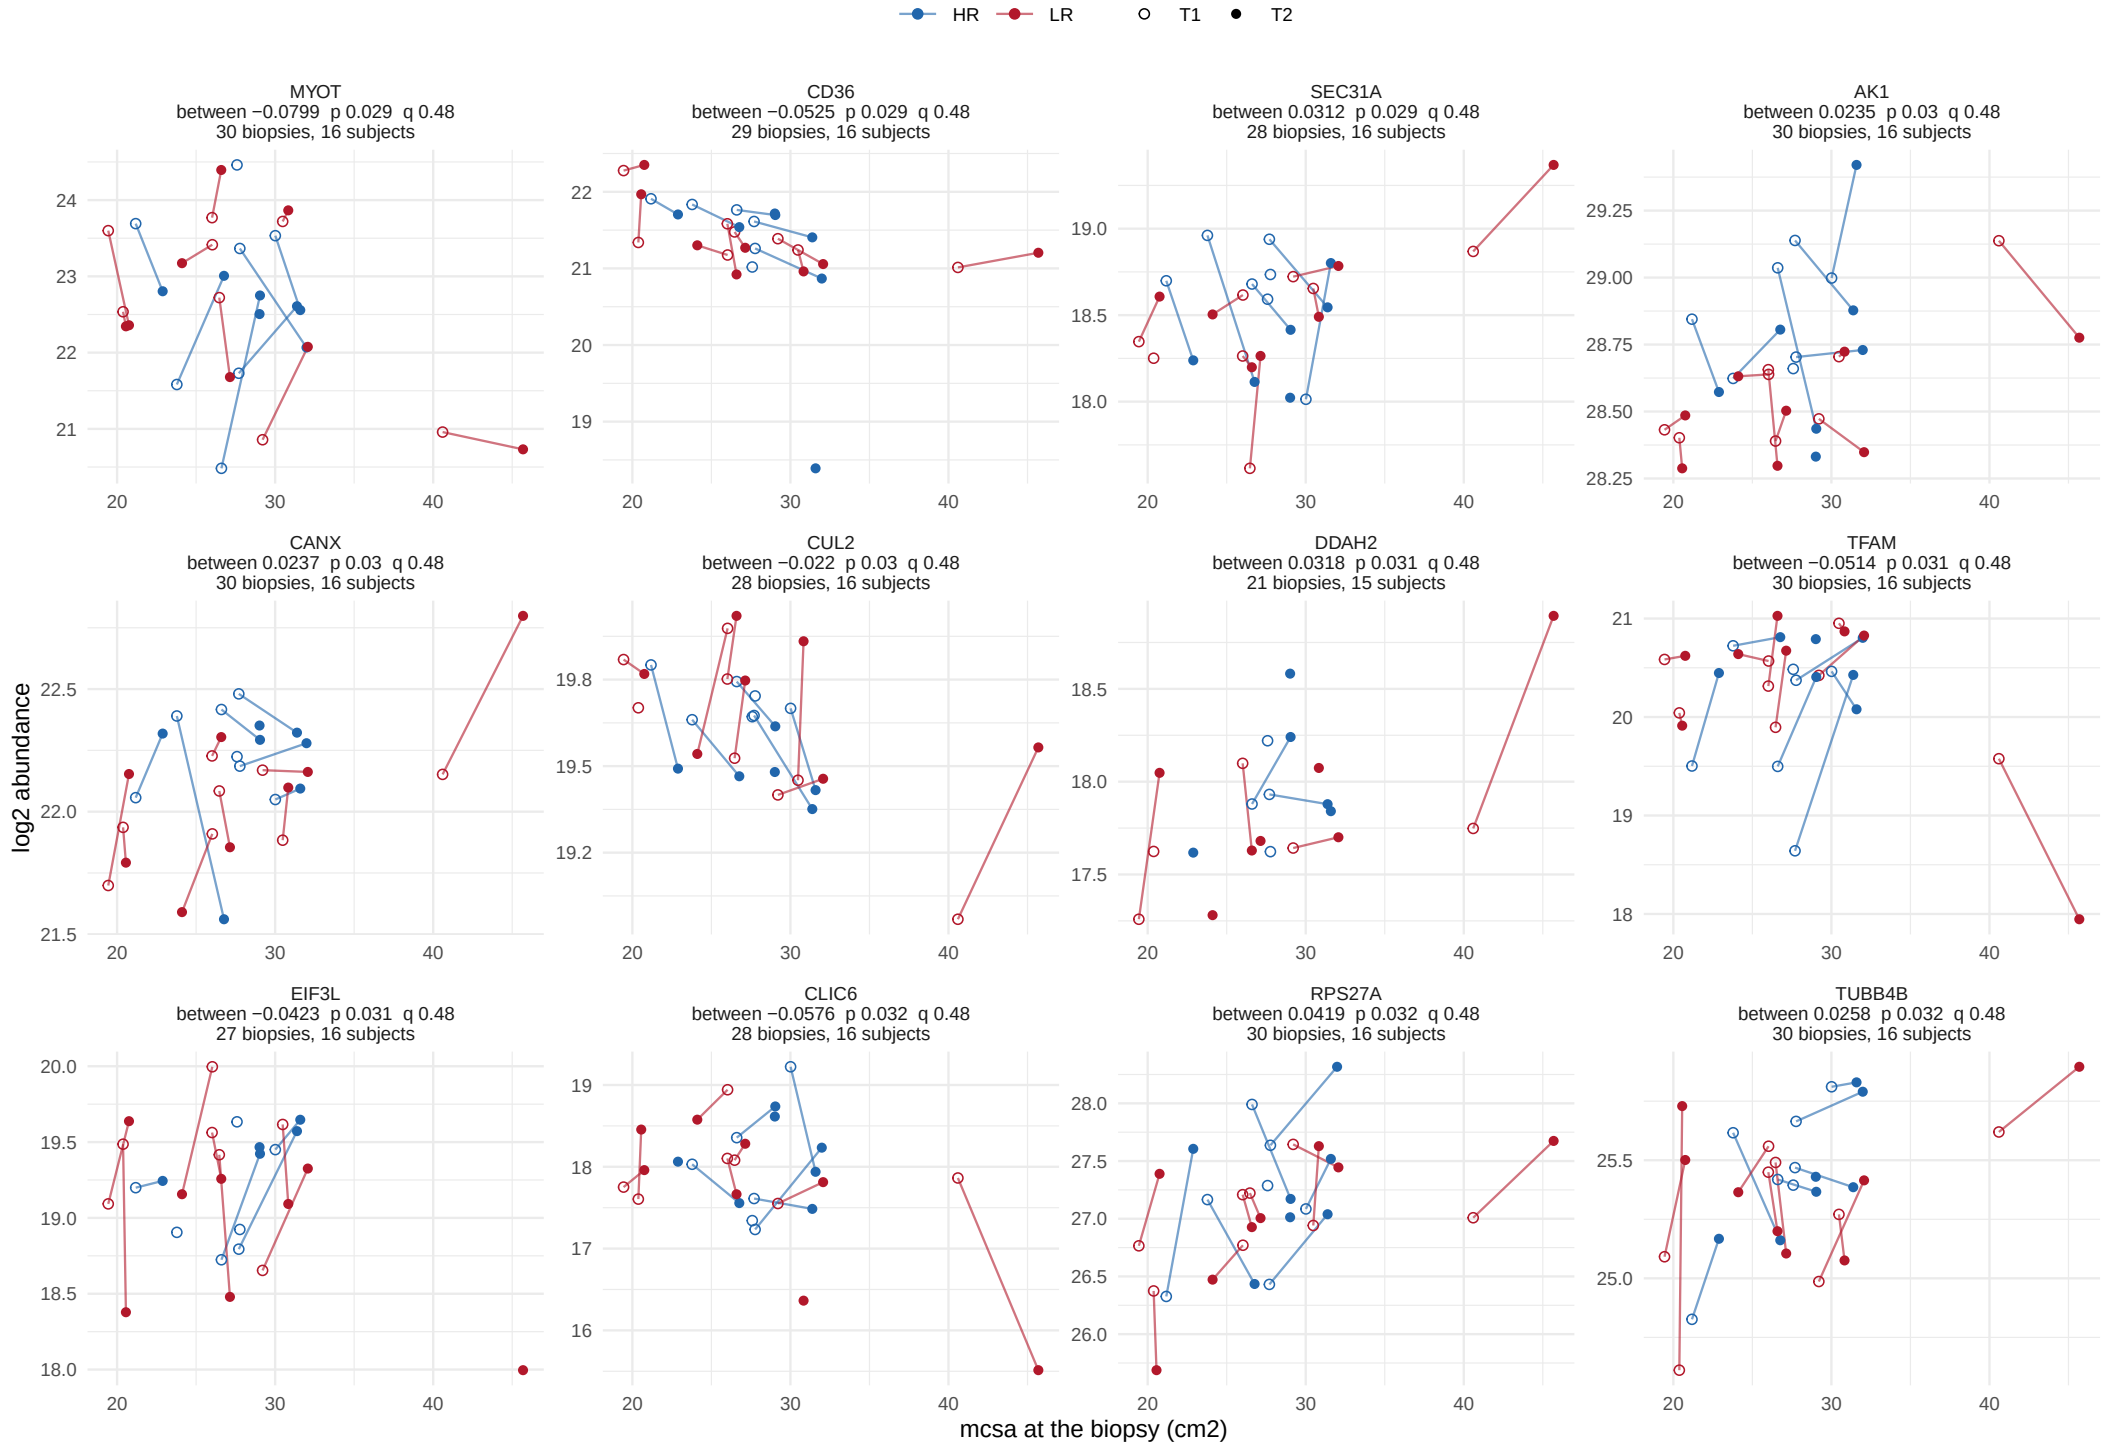

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

mcsa, between−person term


150 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 10 of 13.

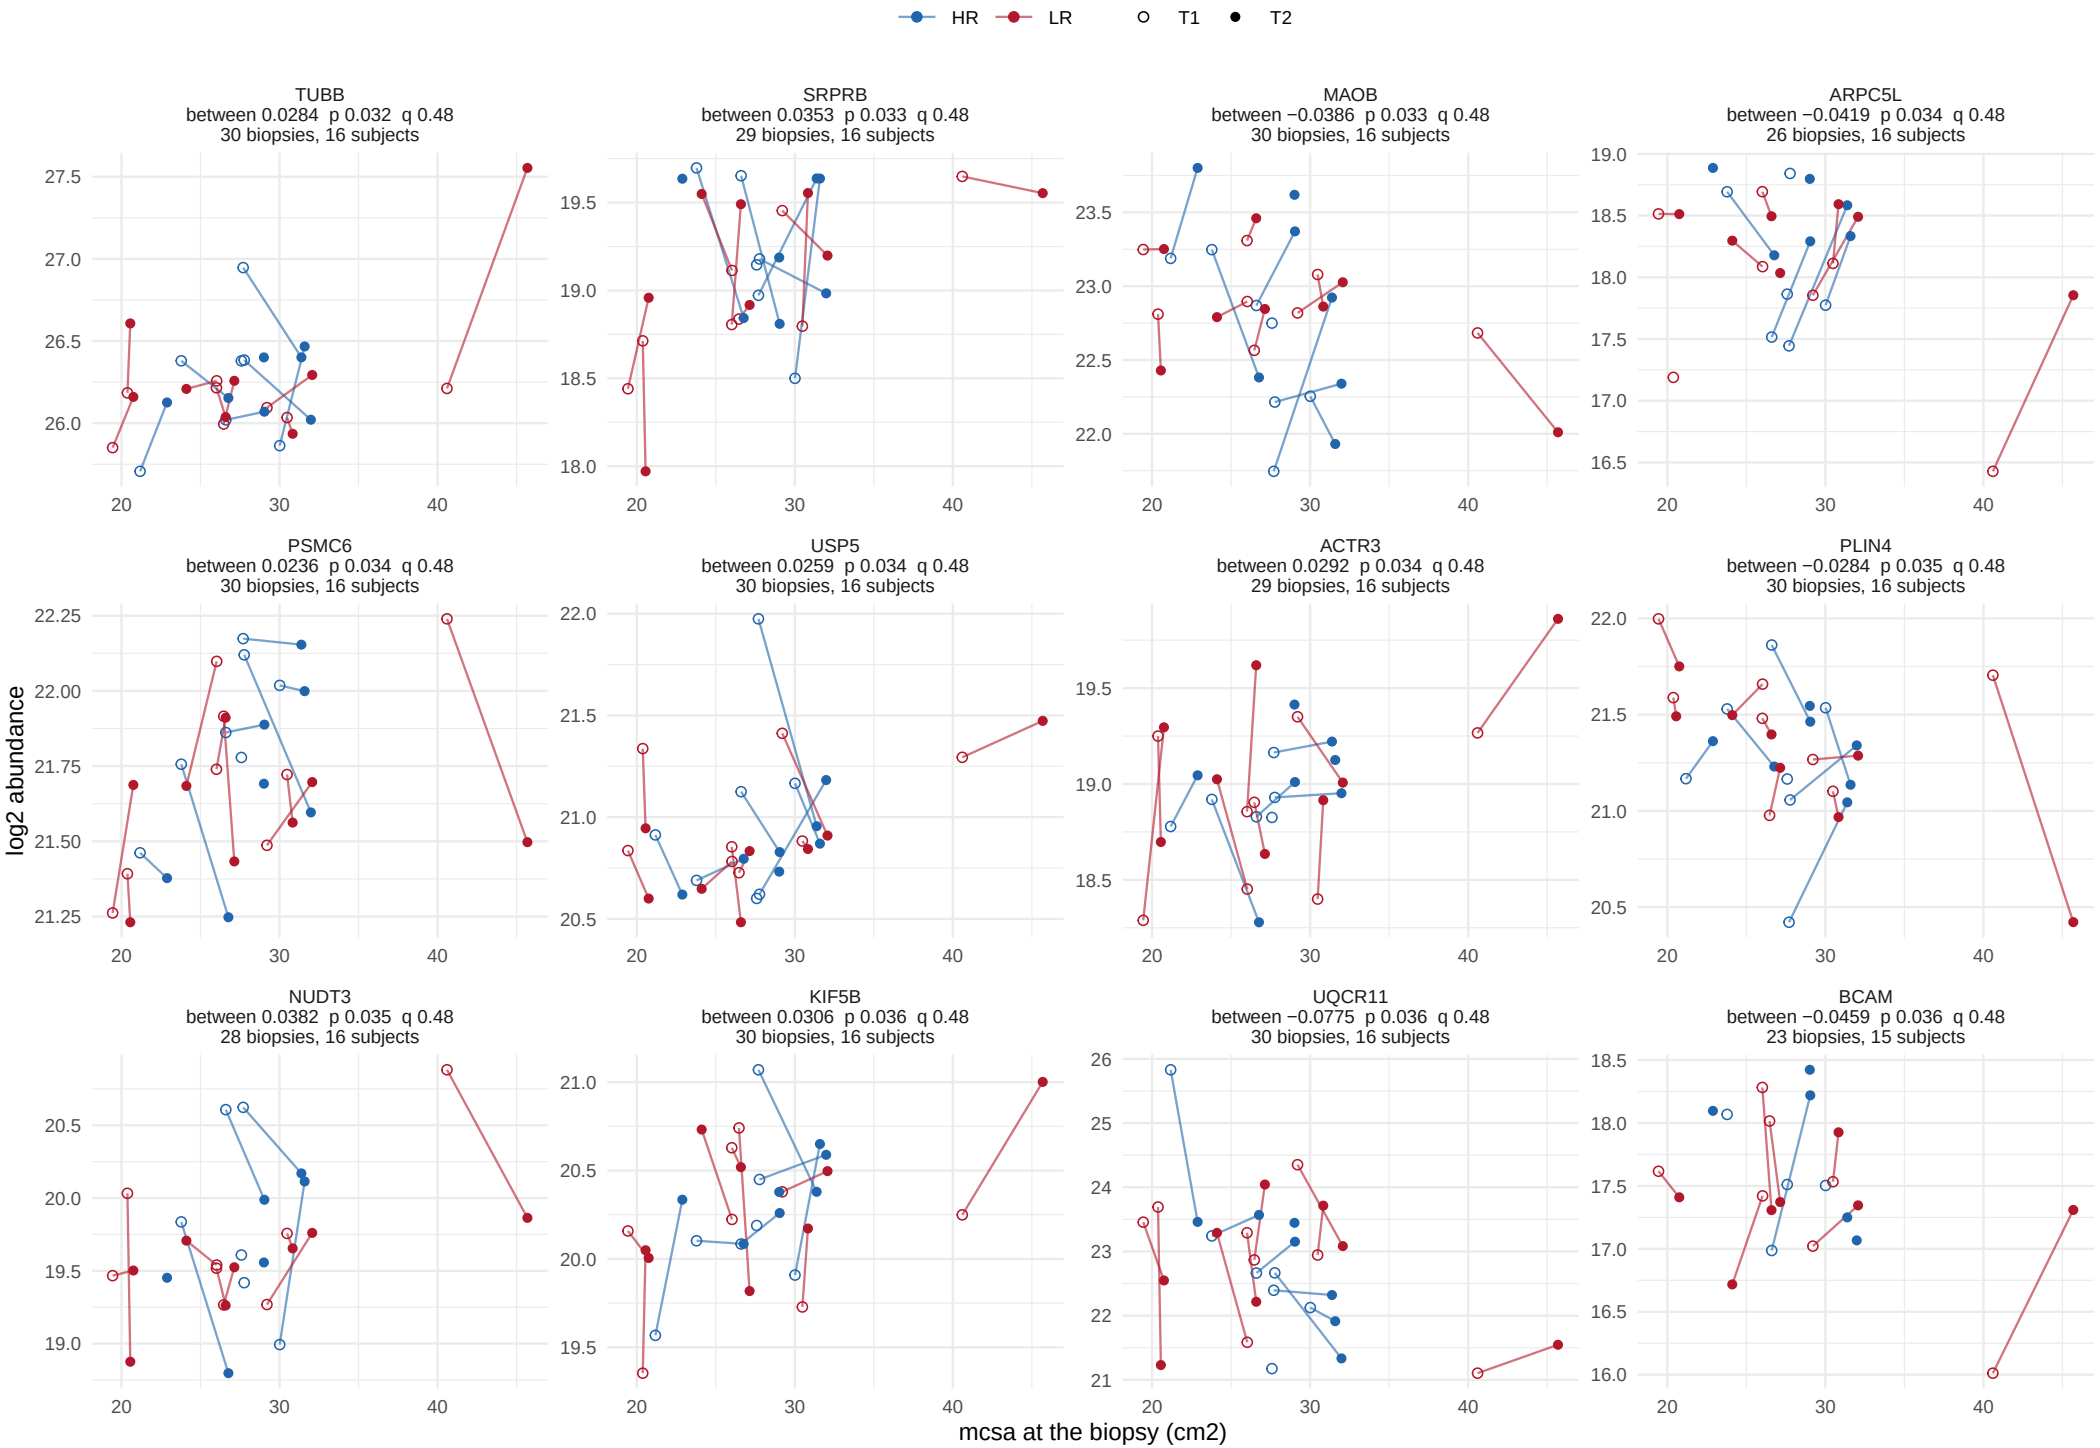

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

mcsa, between−person term


150 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 11 of 13.

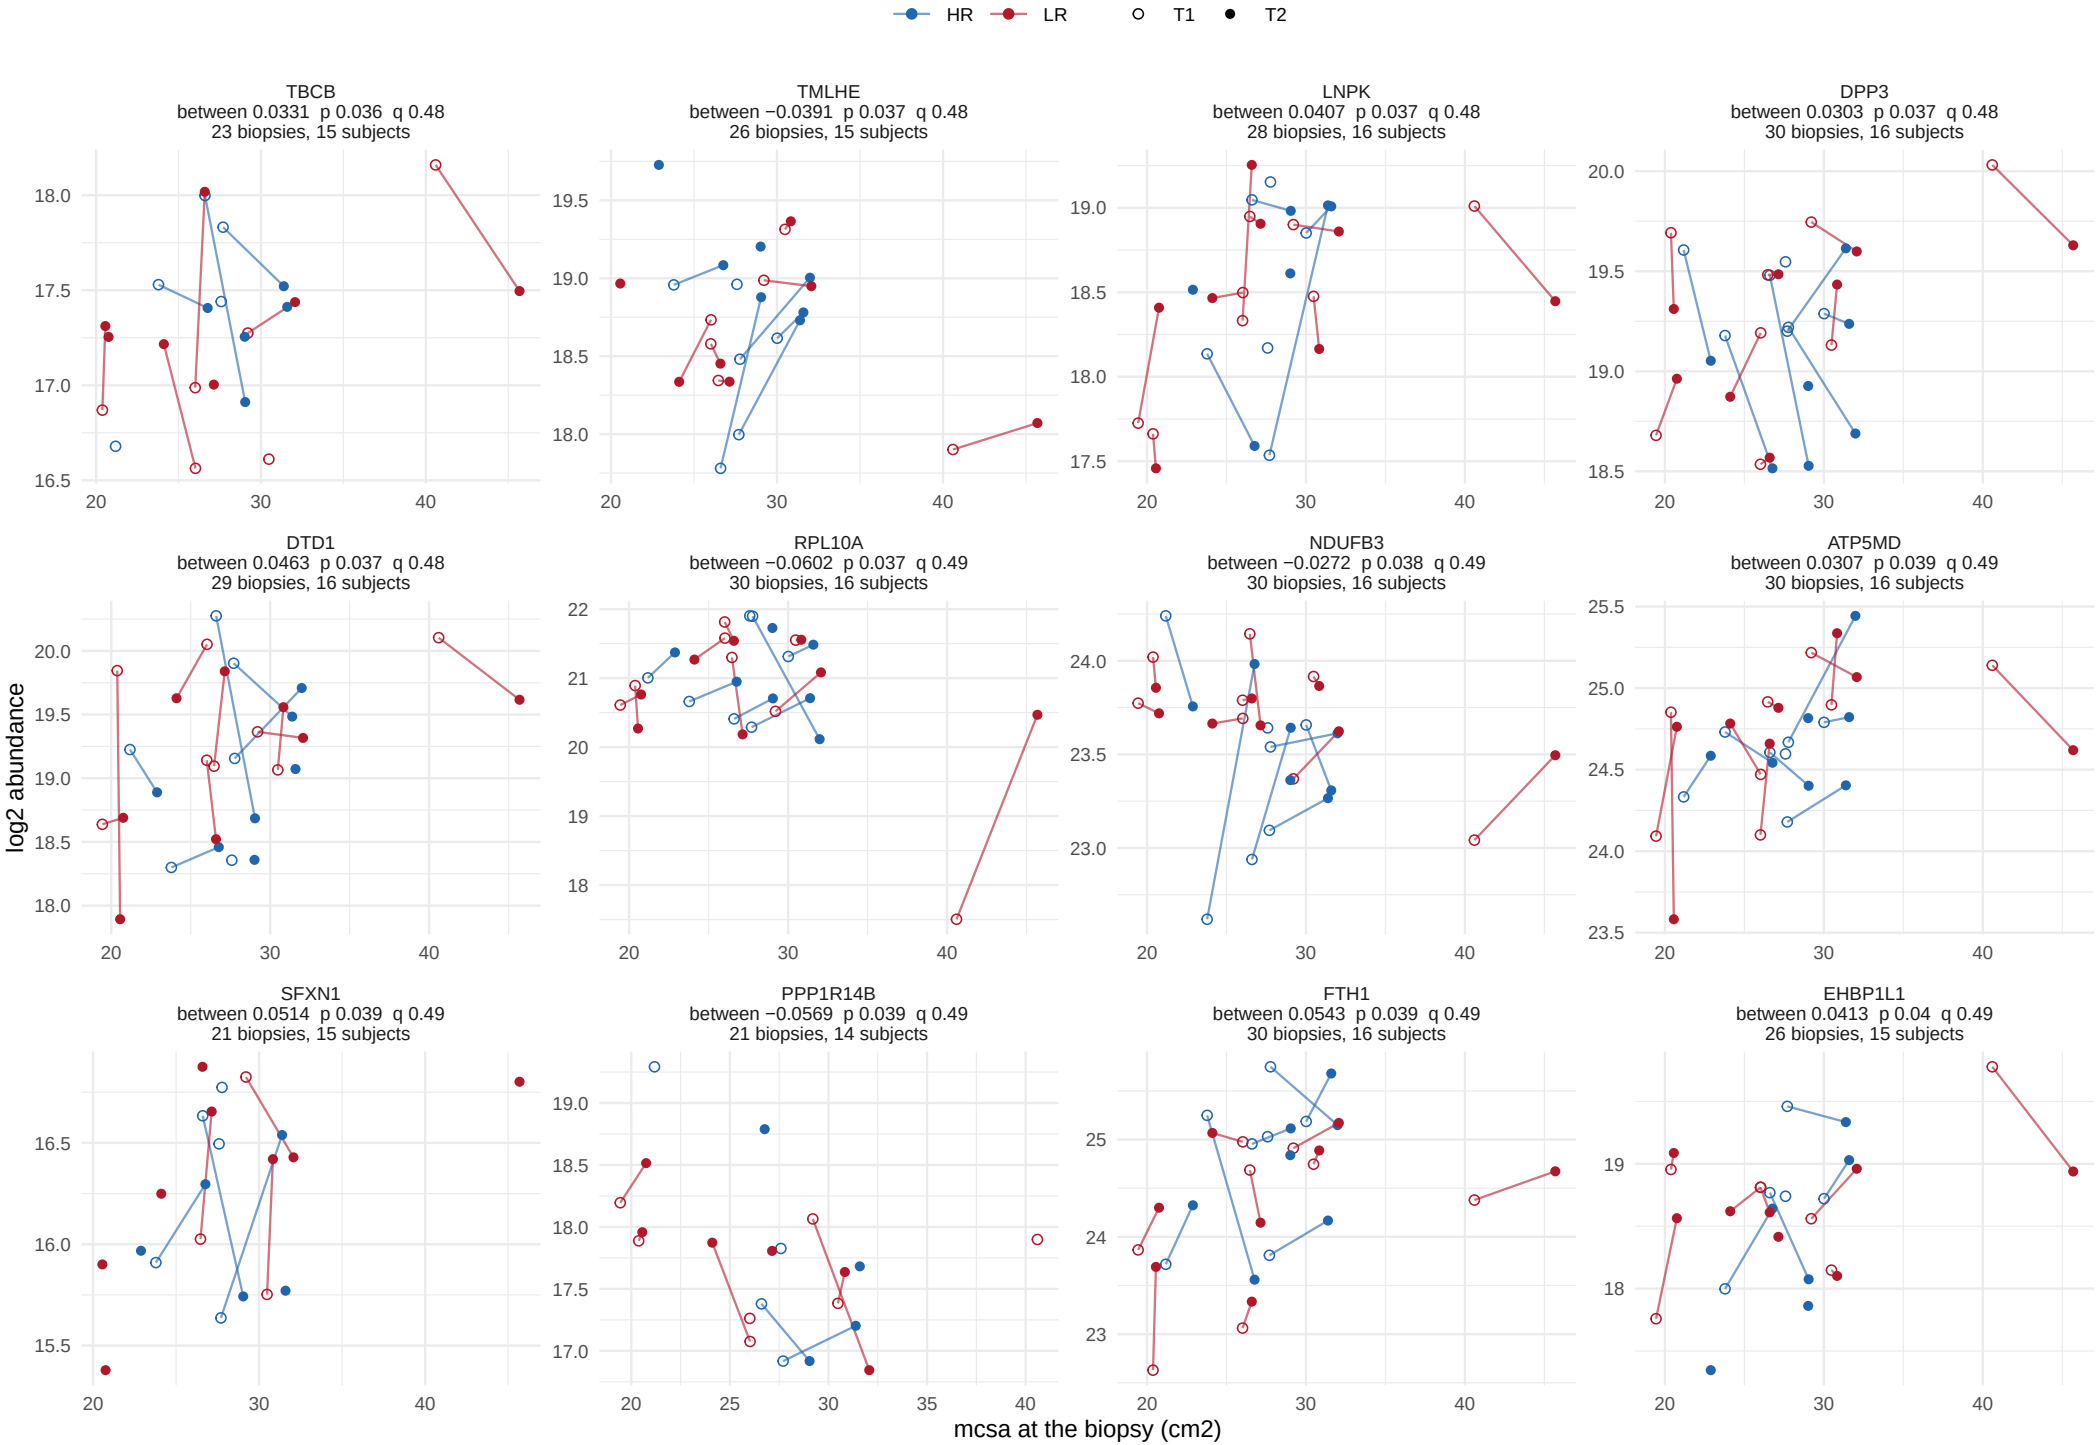

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

mcsa, between−person term


150 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 12 of 13.

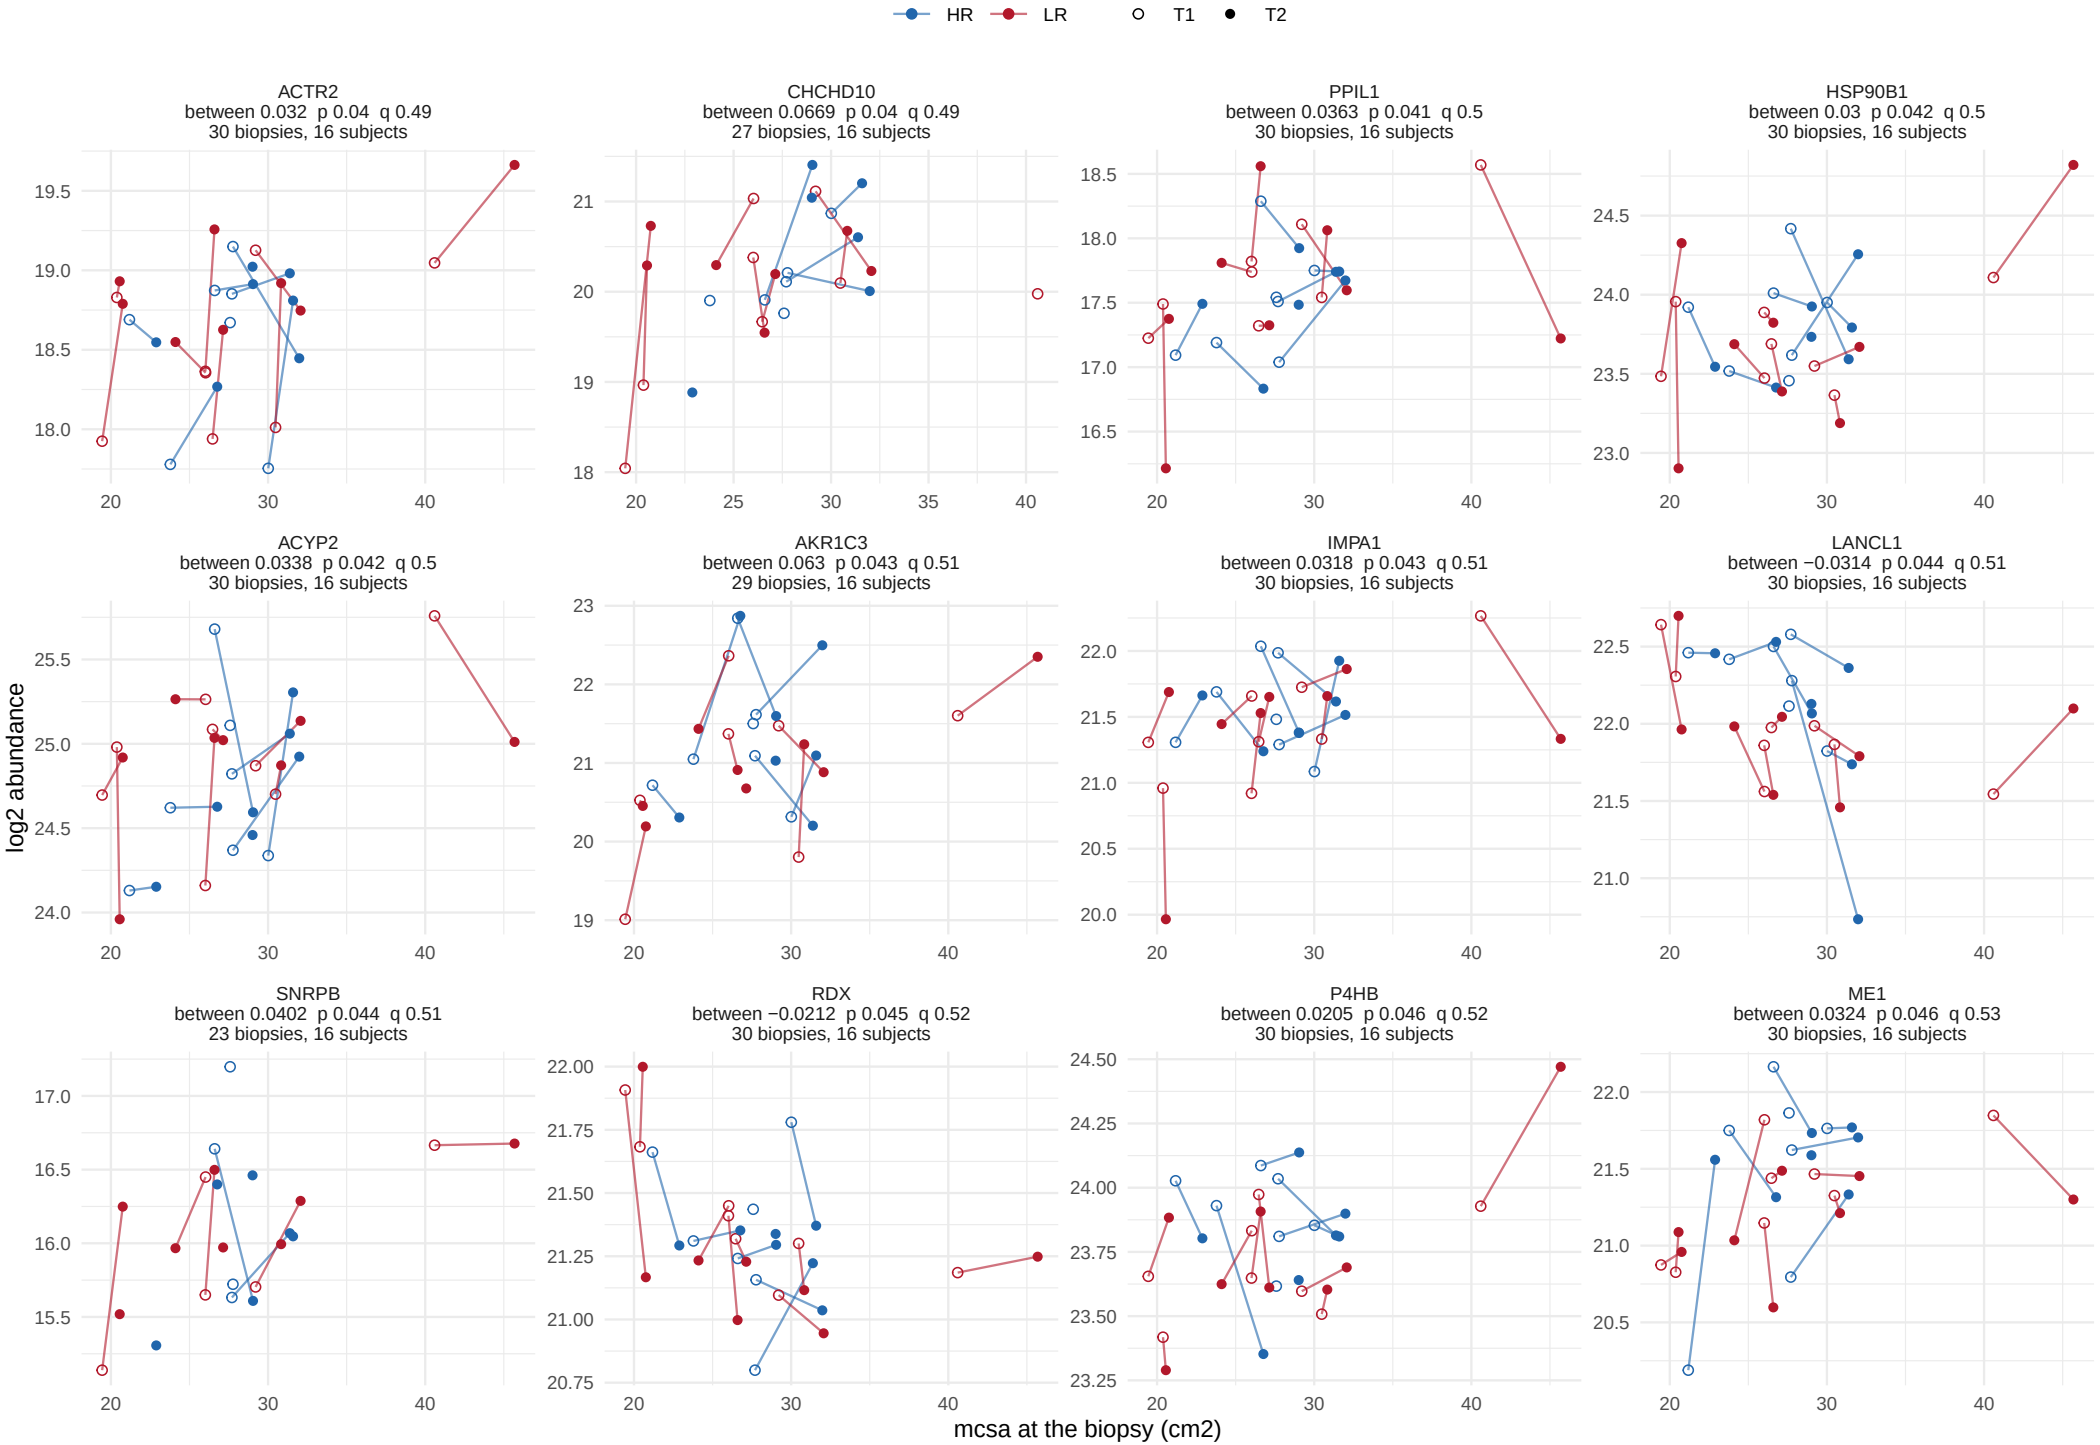

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

mcsa, between−person term


150 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 13 of 13.

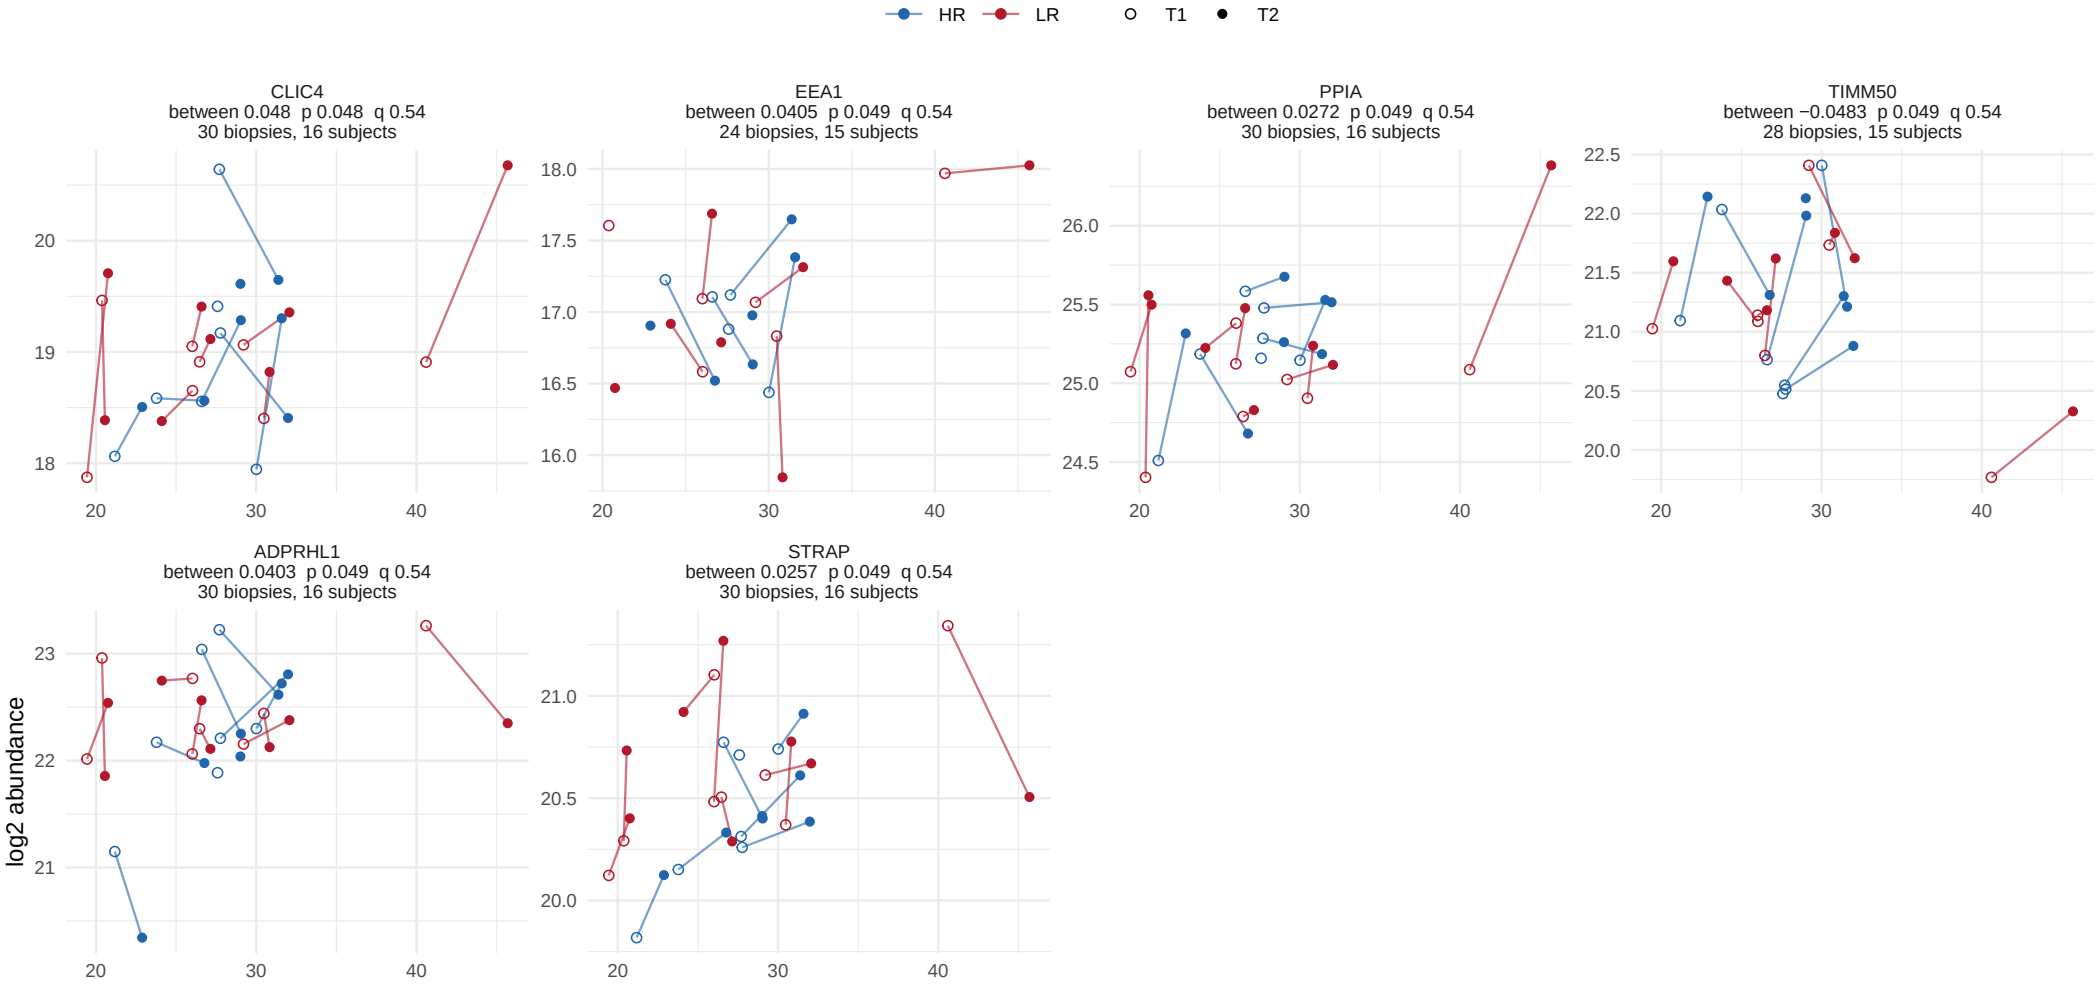

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_press_1rm, within−person term


101 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 1 of 9.

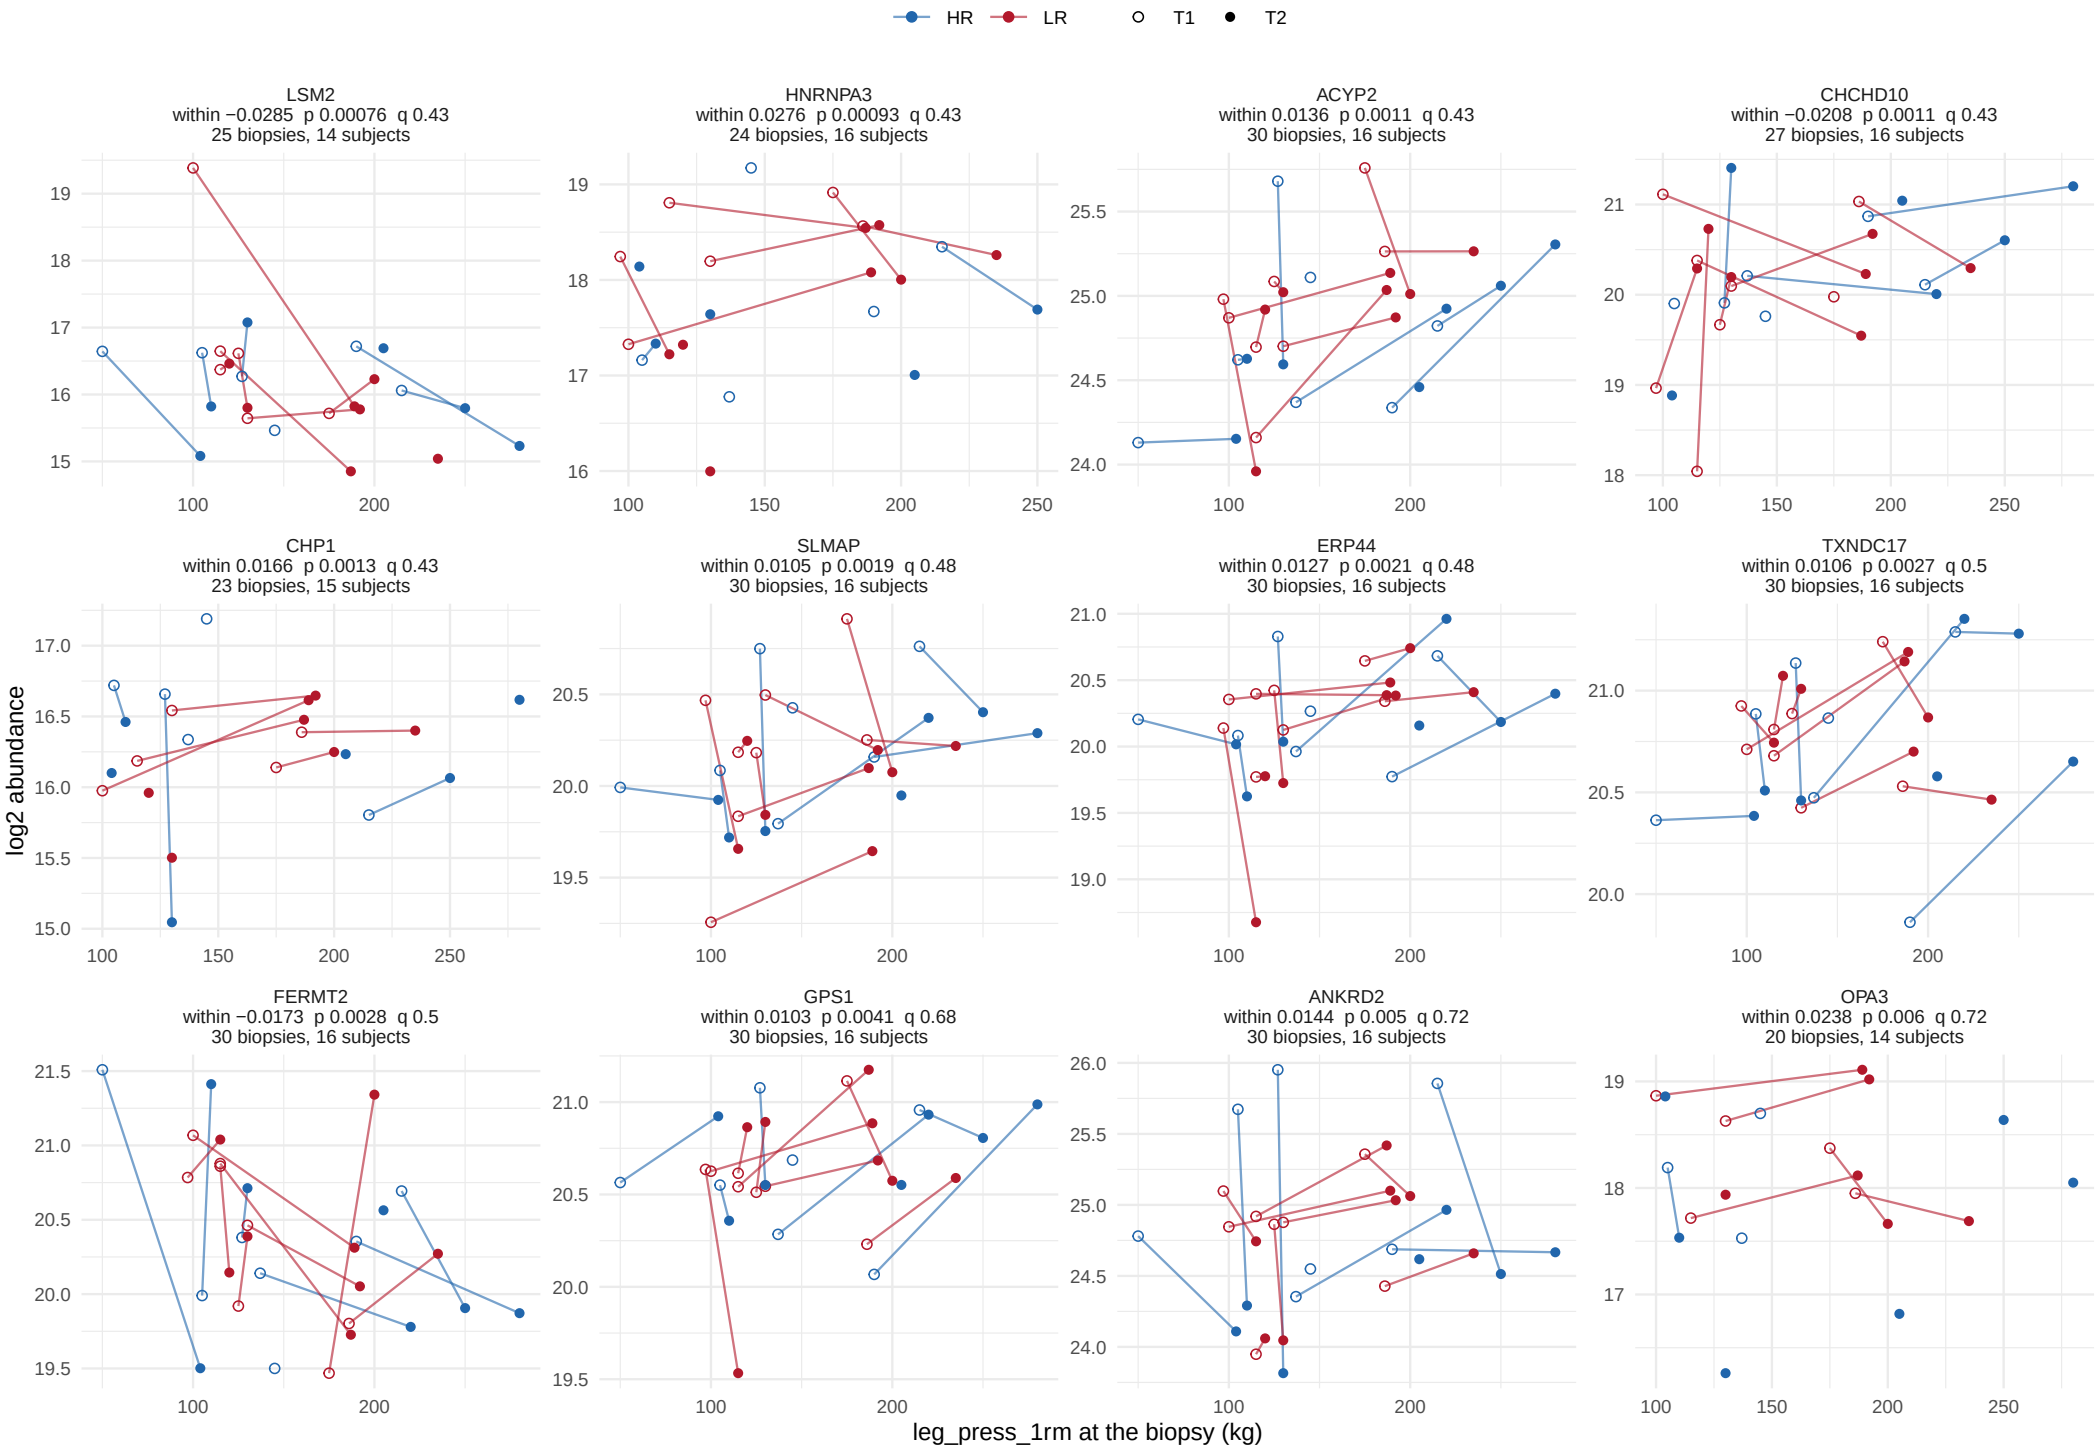

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_press_1rm, within−person term


101 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 2 of 9.

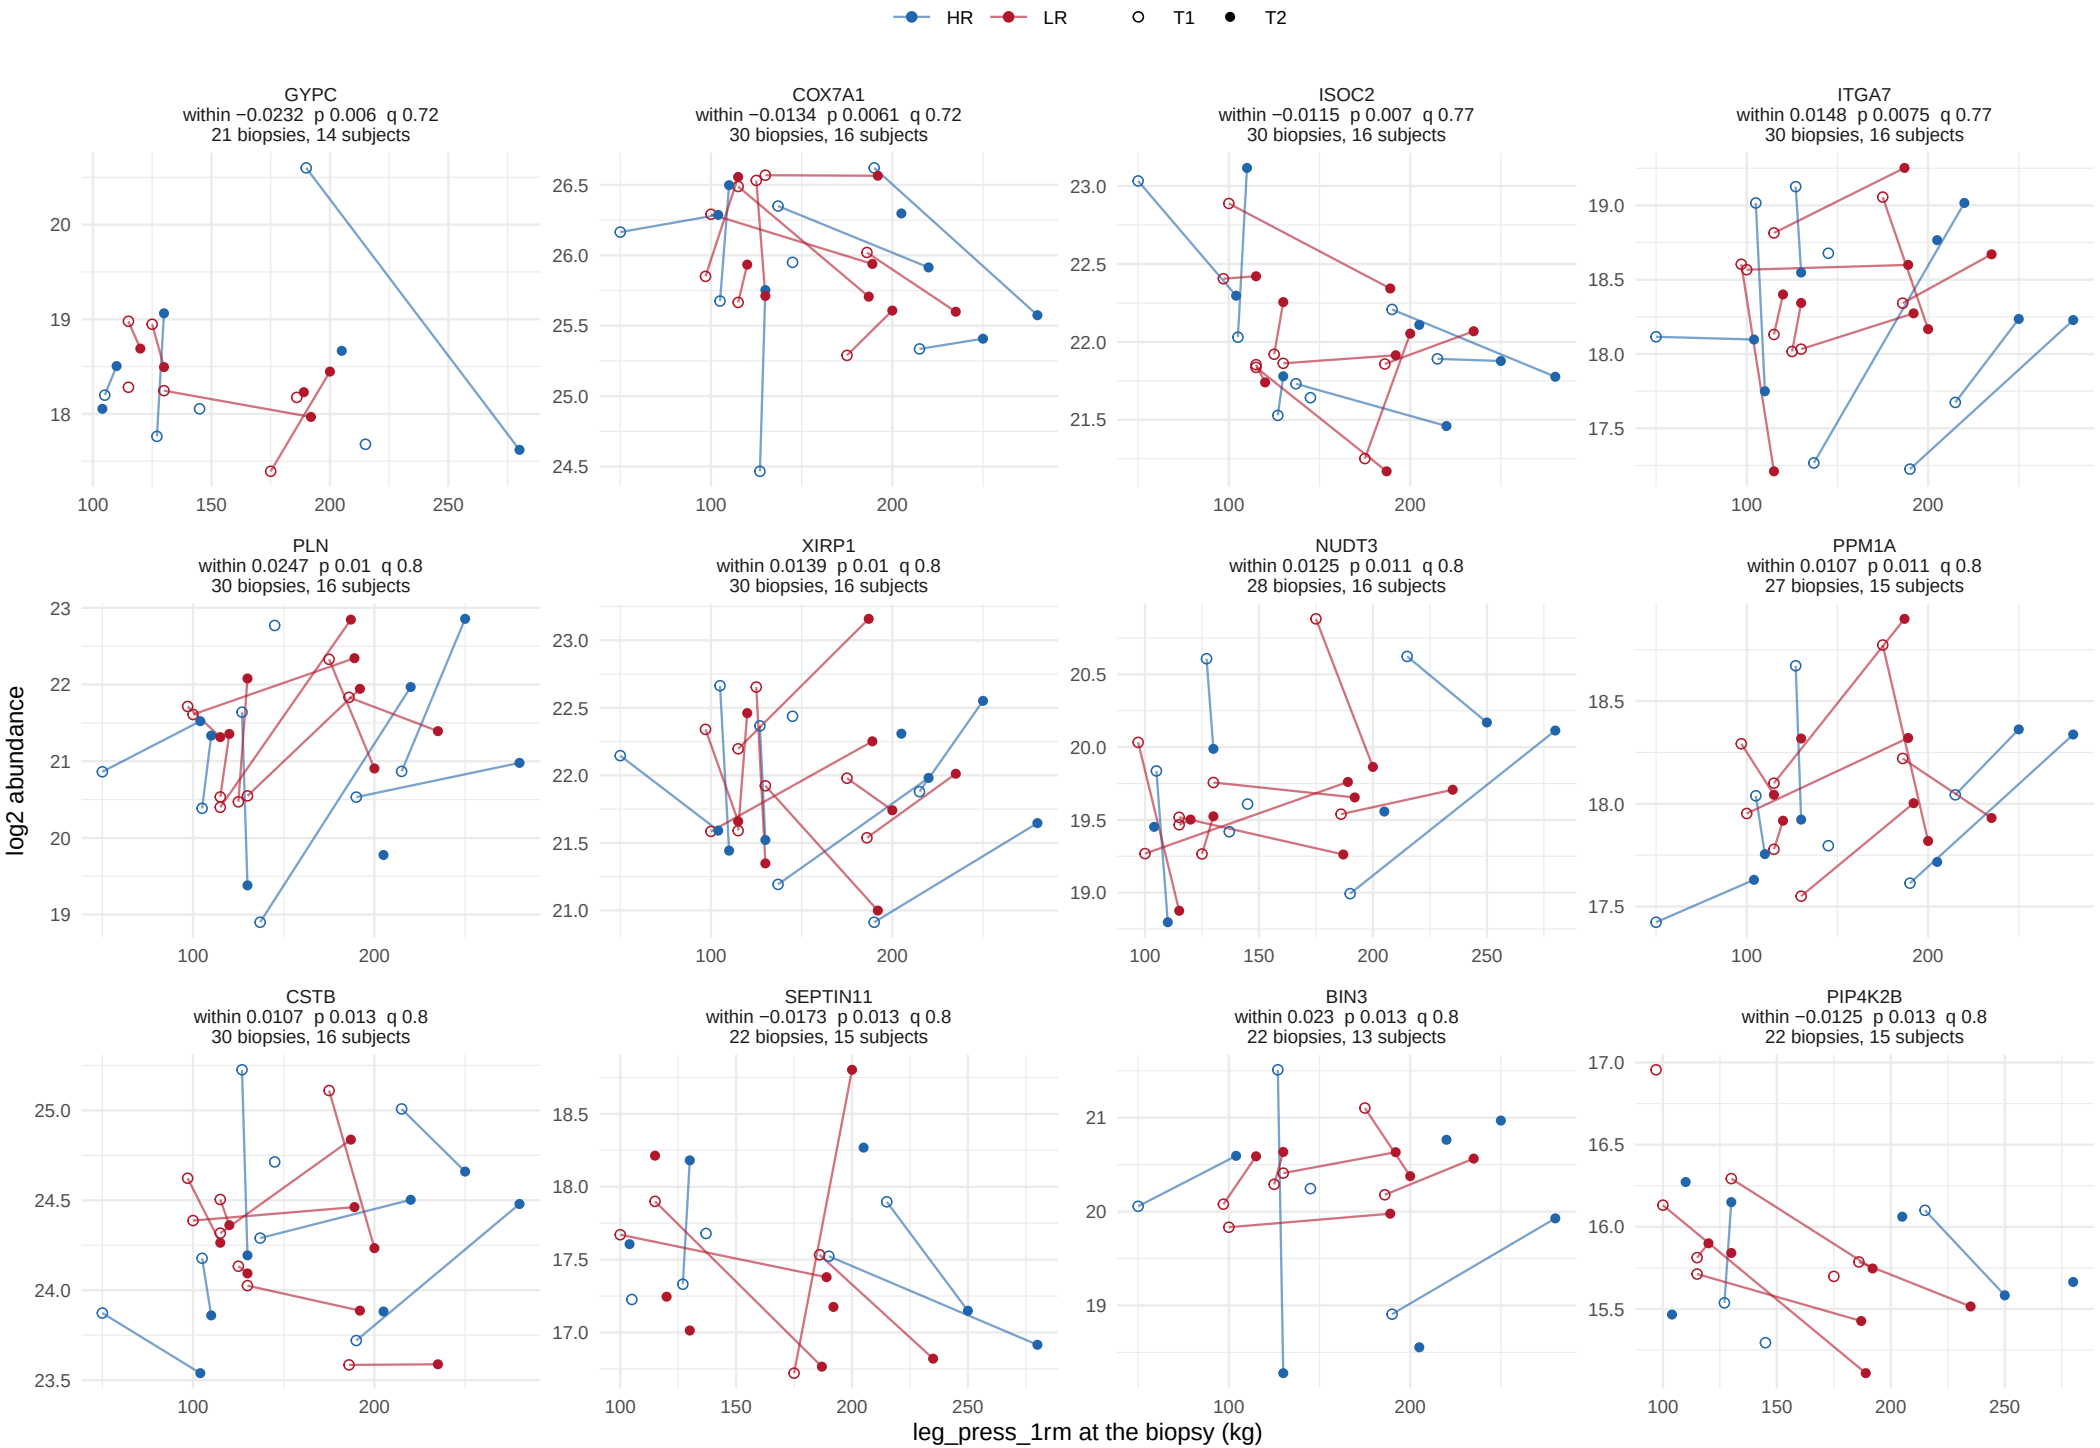

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_press_1rm, within−person term


101 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 3 of 9.

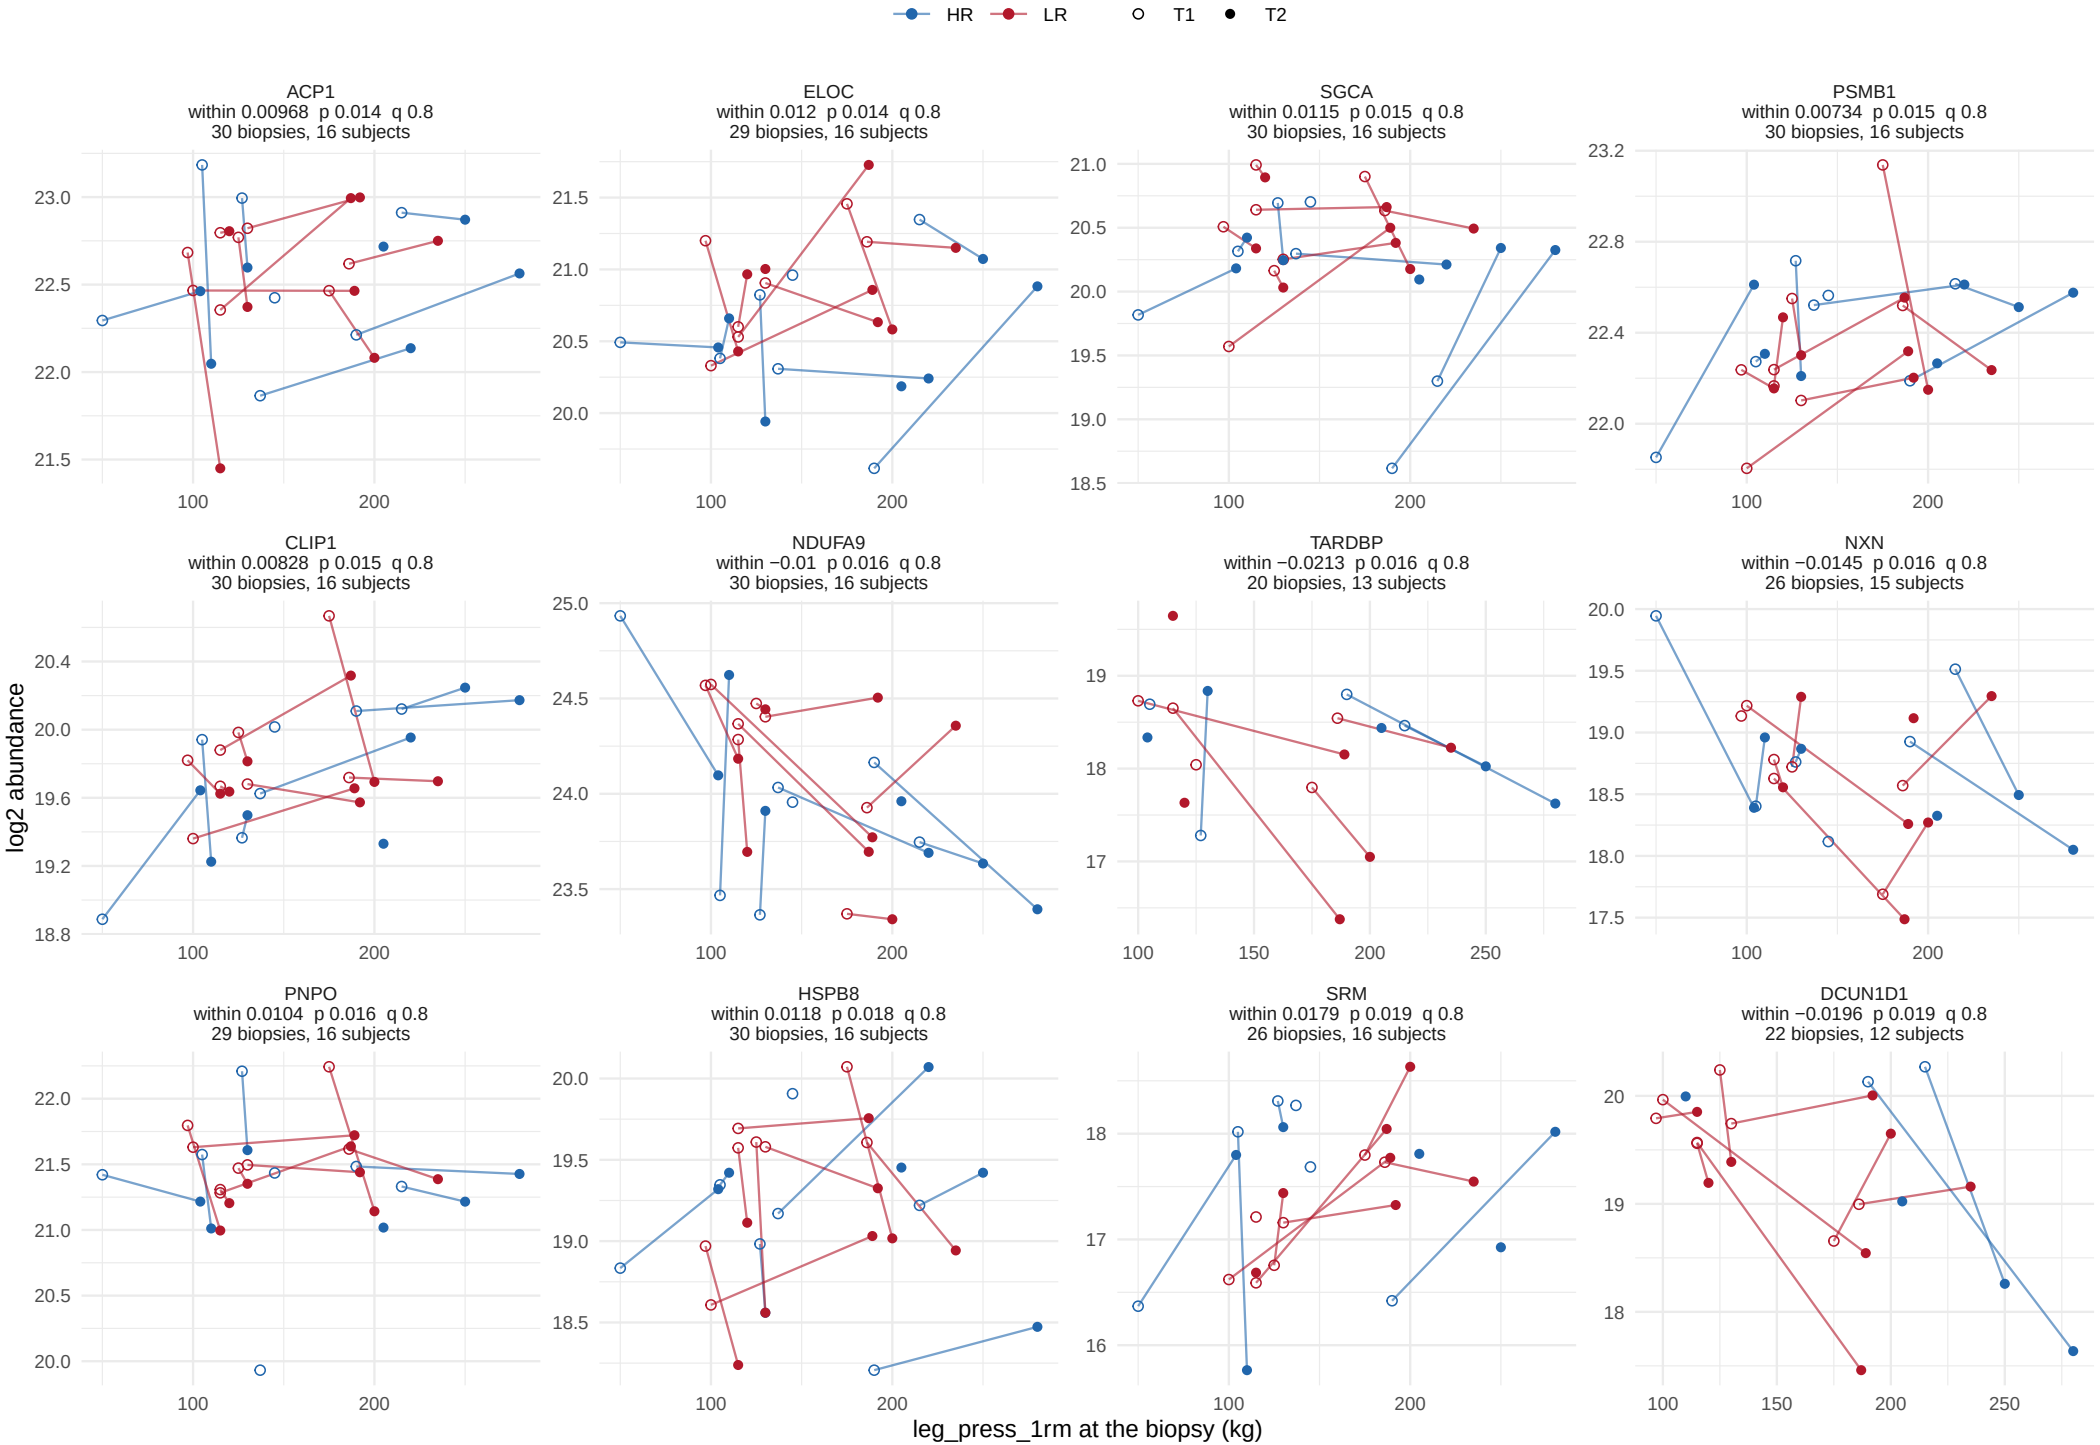

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_press_1rm, within−person term


101 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 4 of 9.

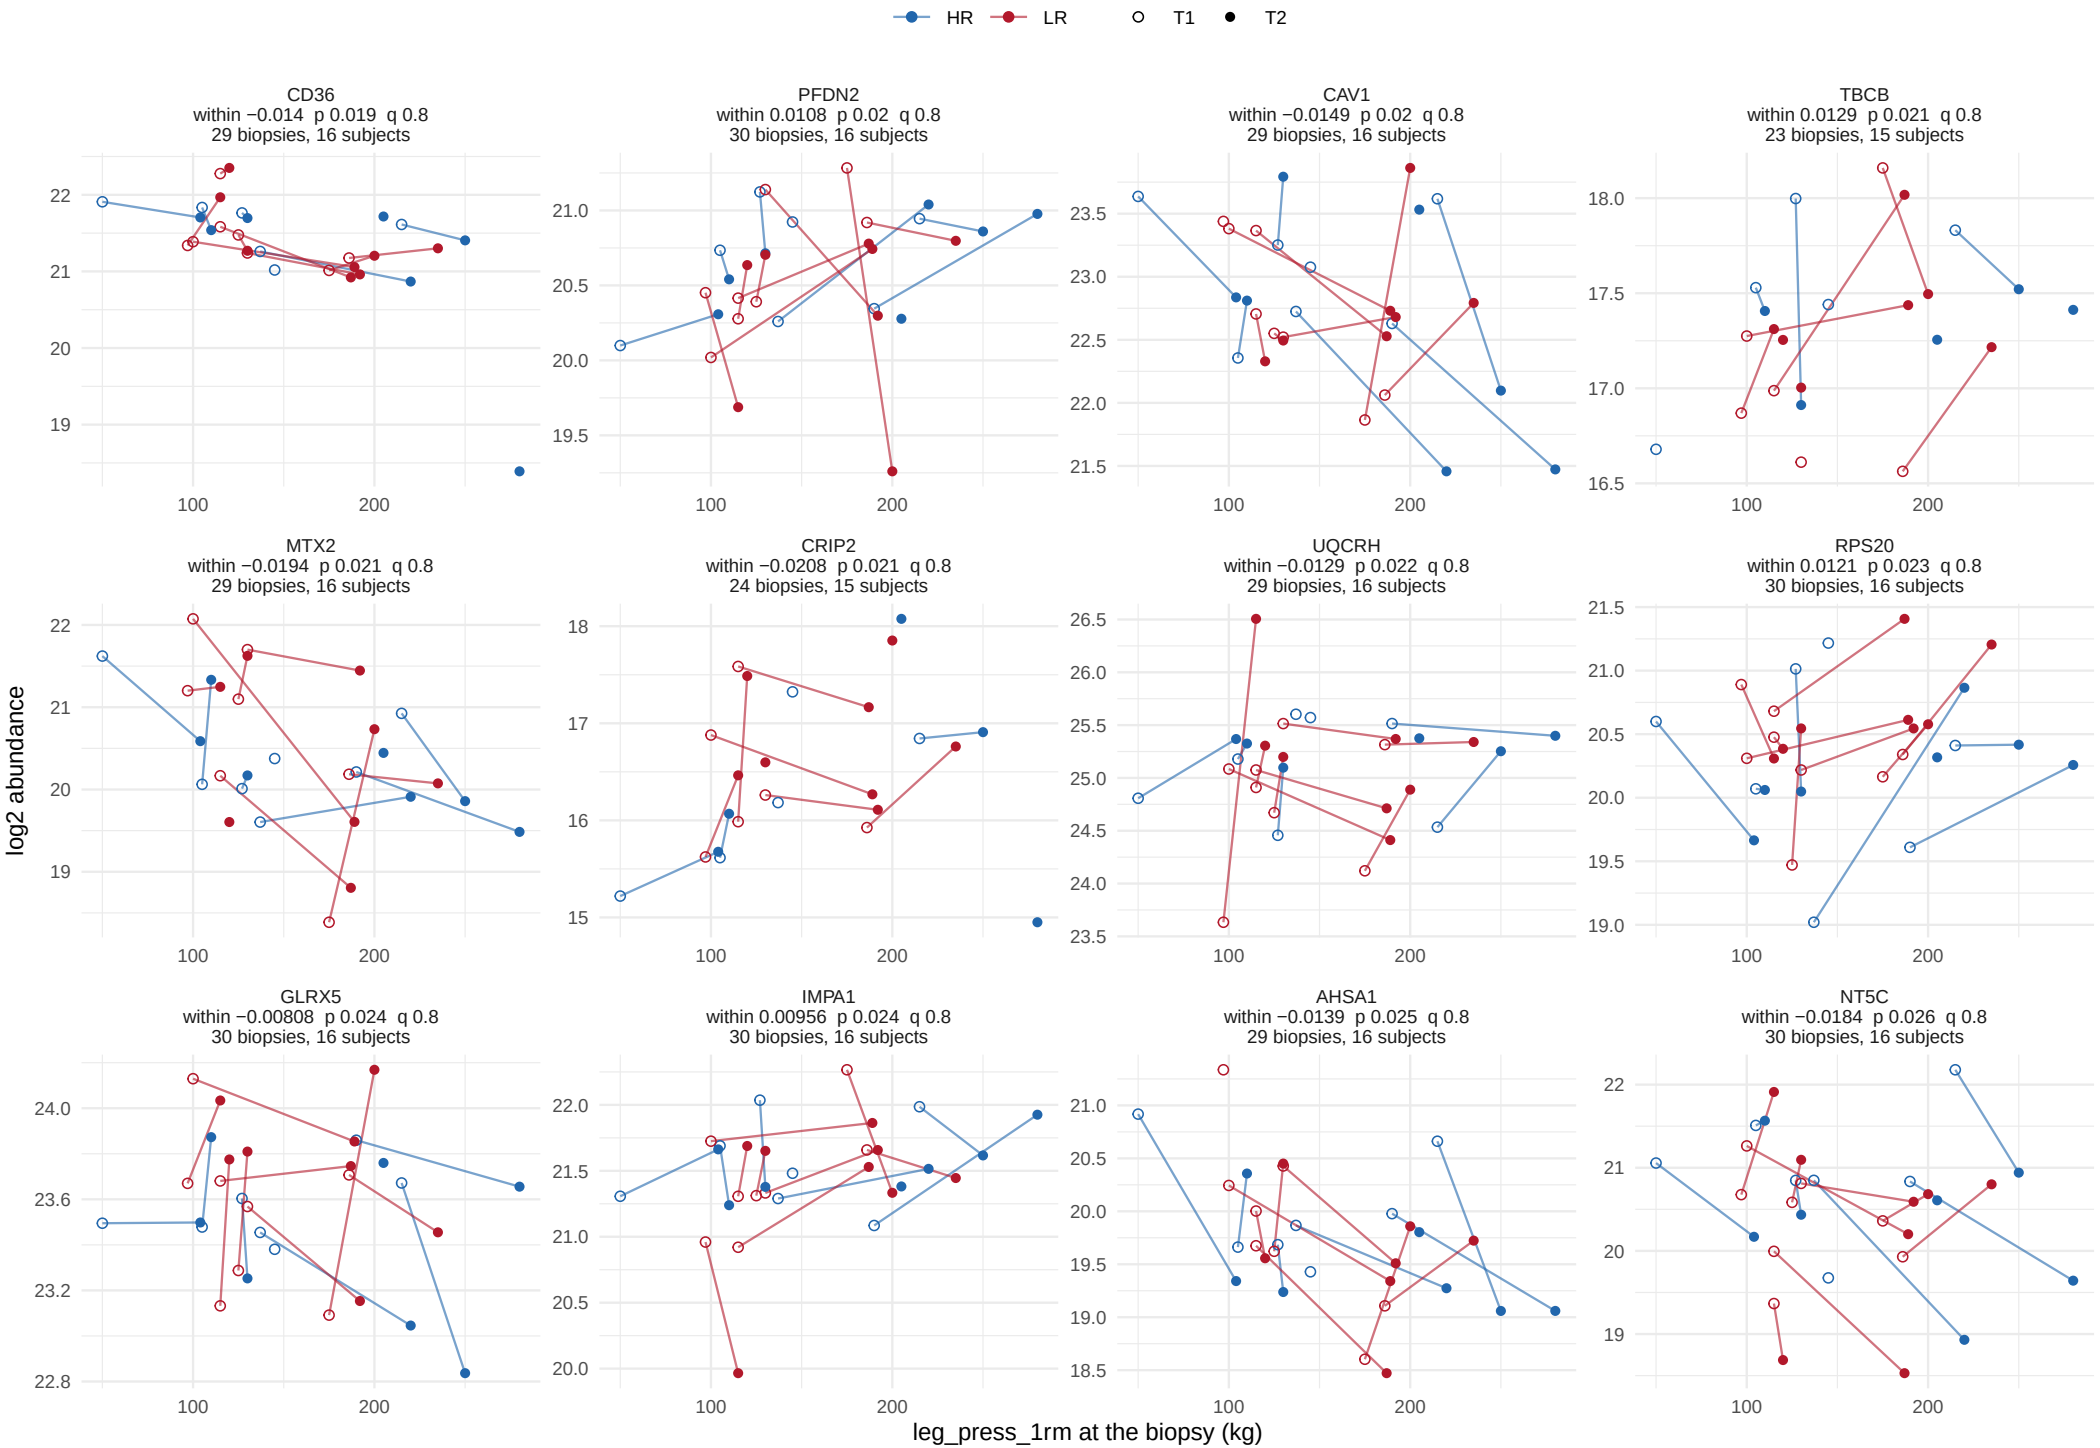

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_press_1rm, within−person term


101 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 5 of 9.

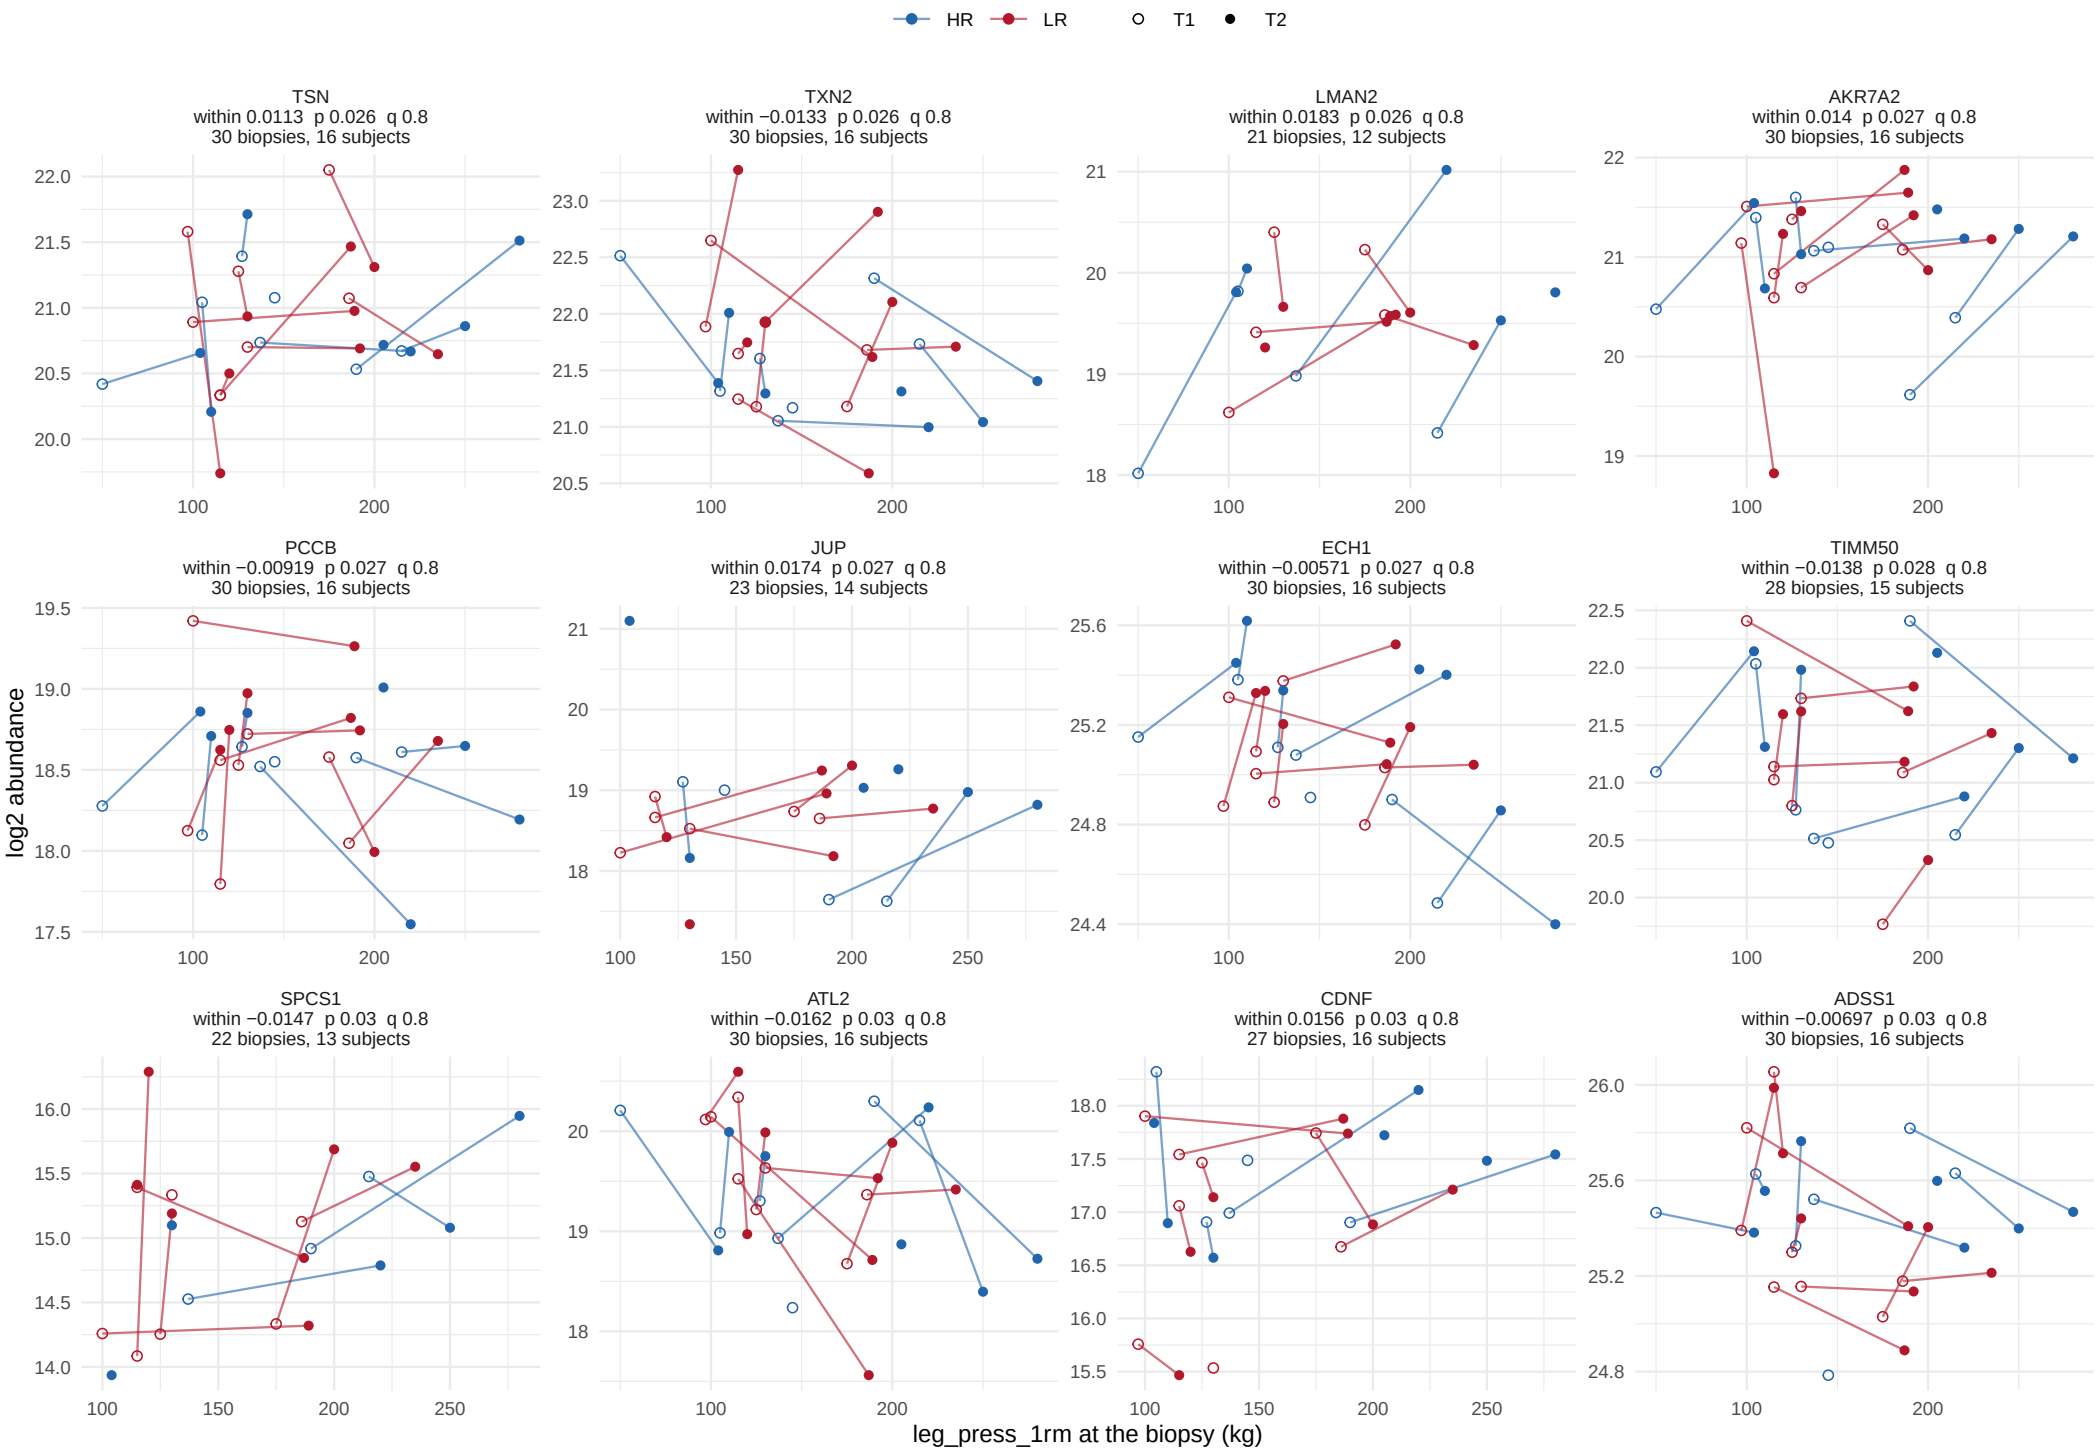

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_press_1rm, within−person term


101 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 6 of 9.

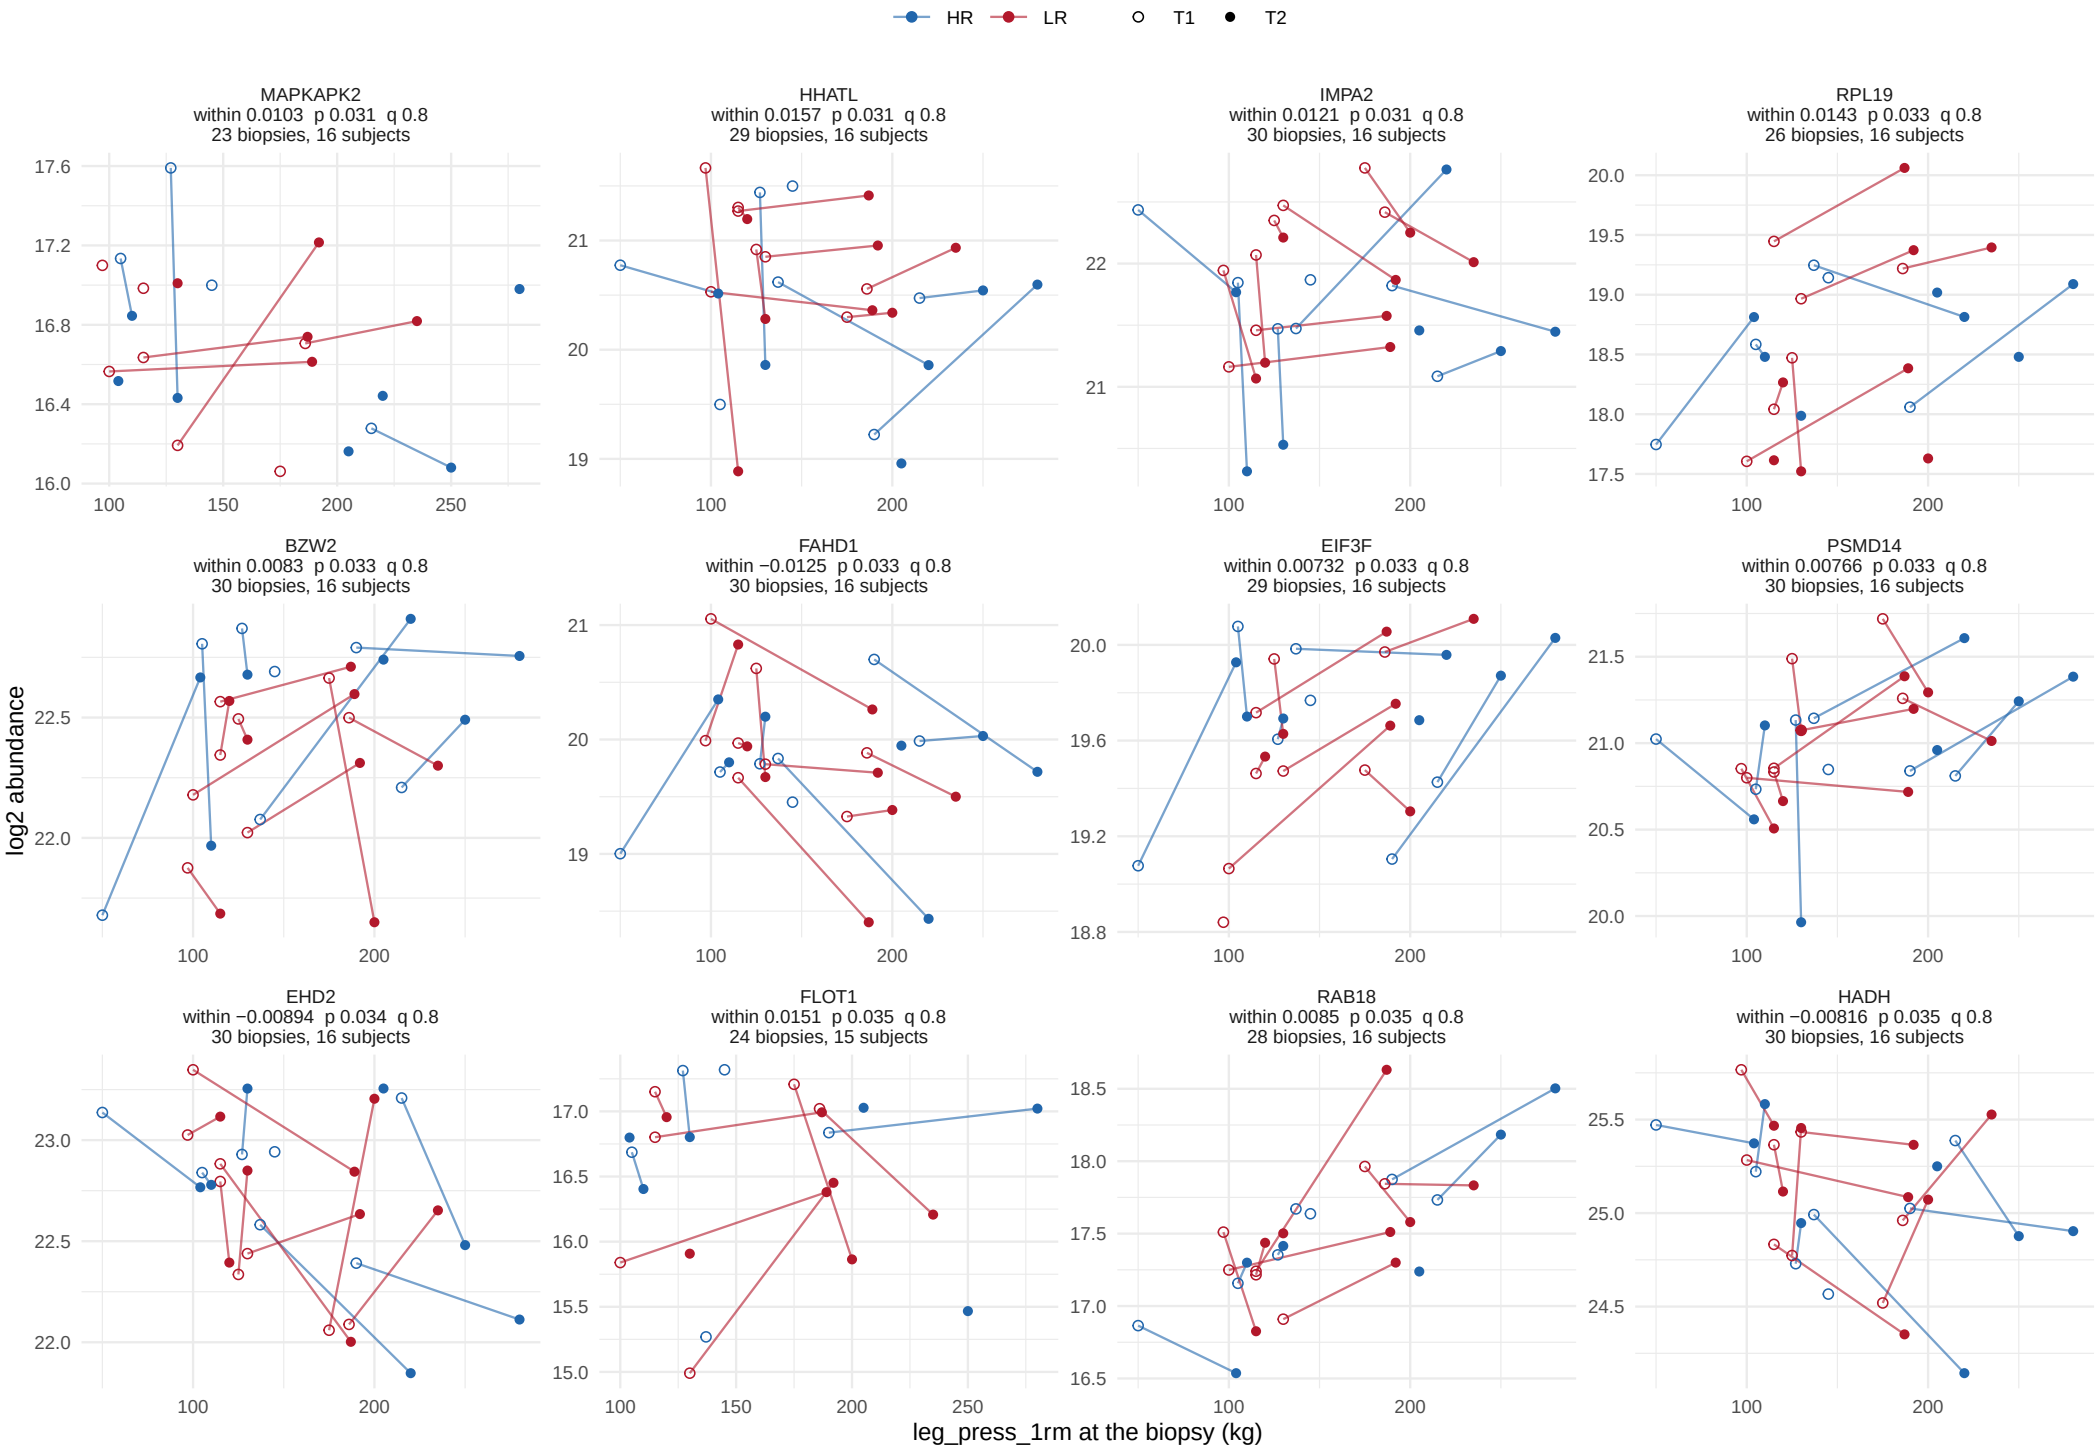

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_press_1rm, within−person term


101 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 7 of 9.

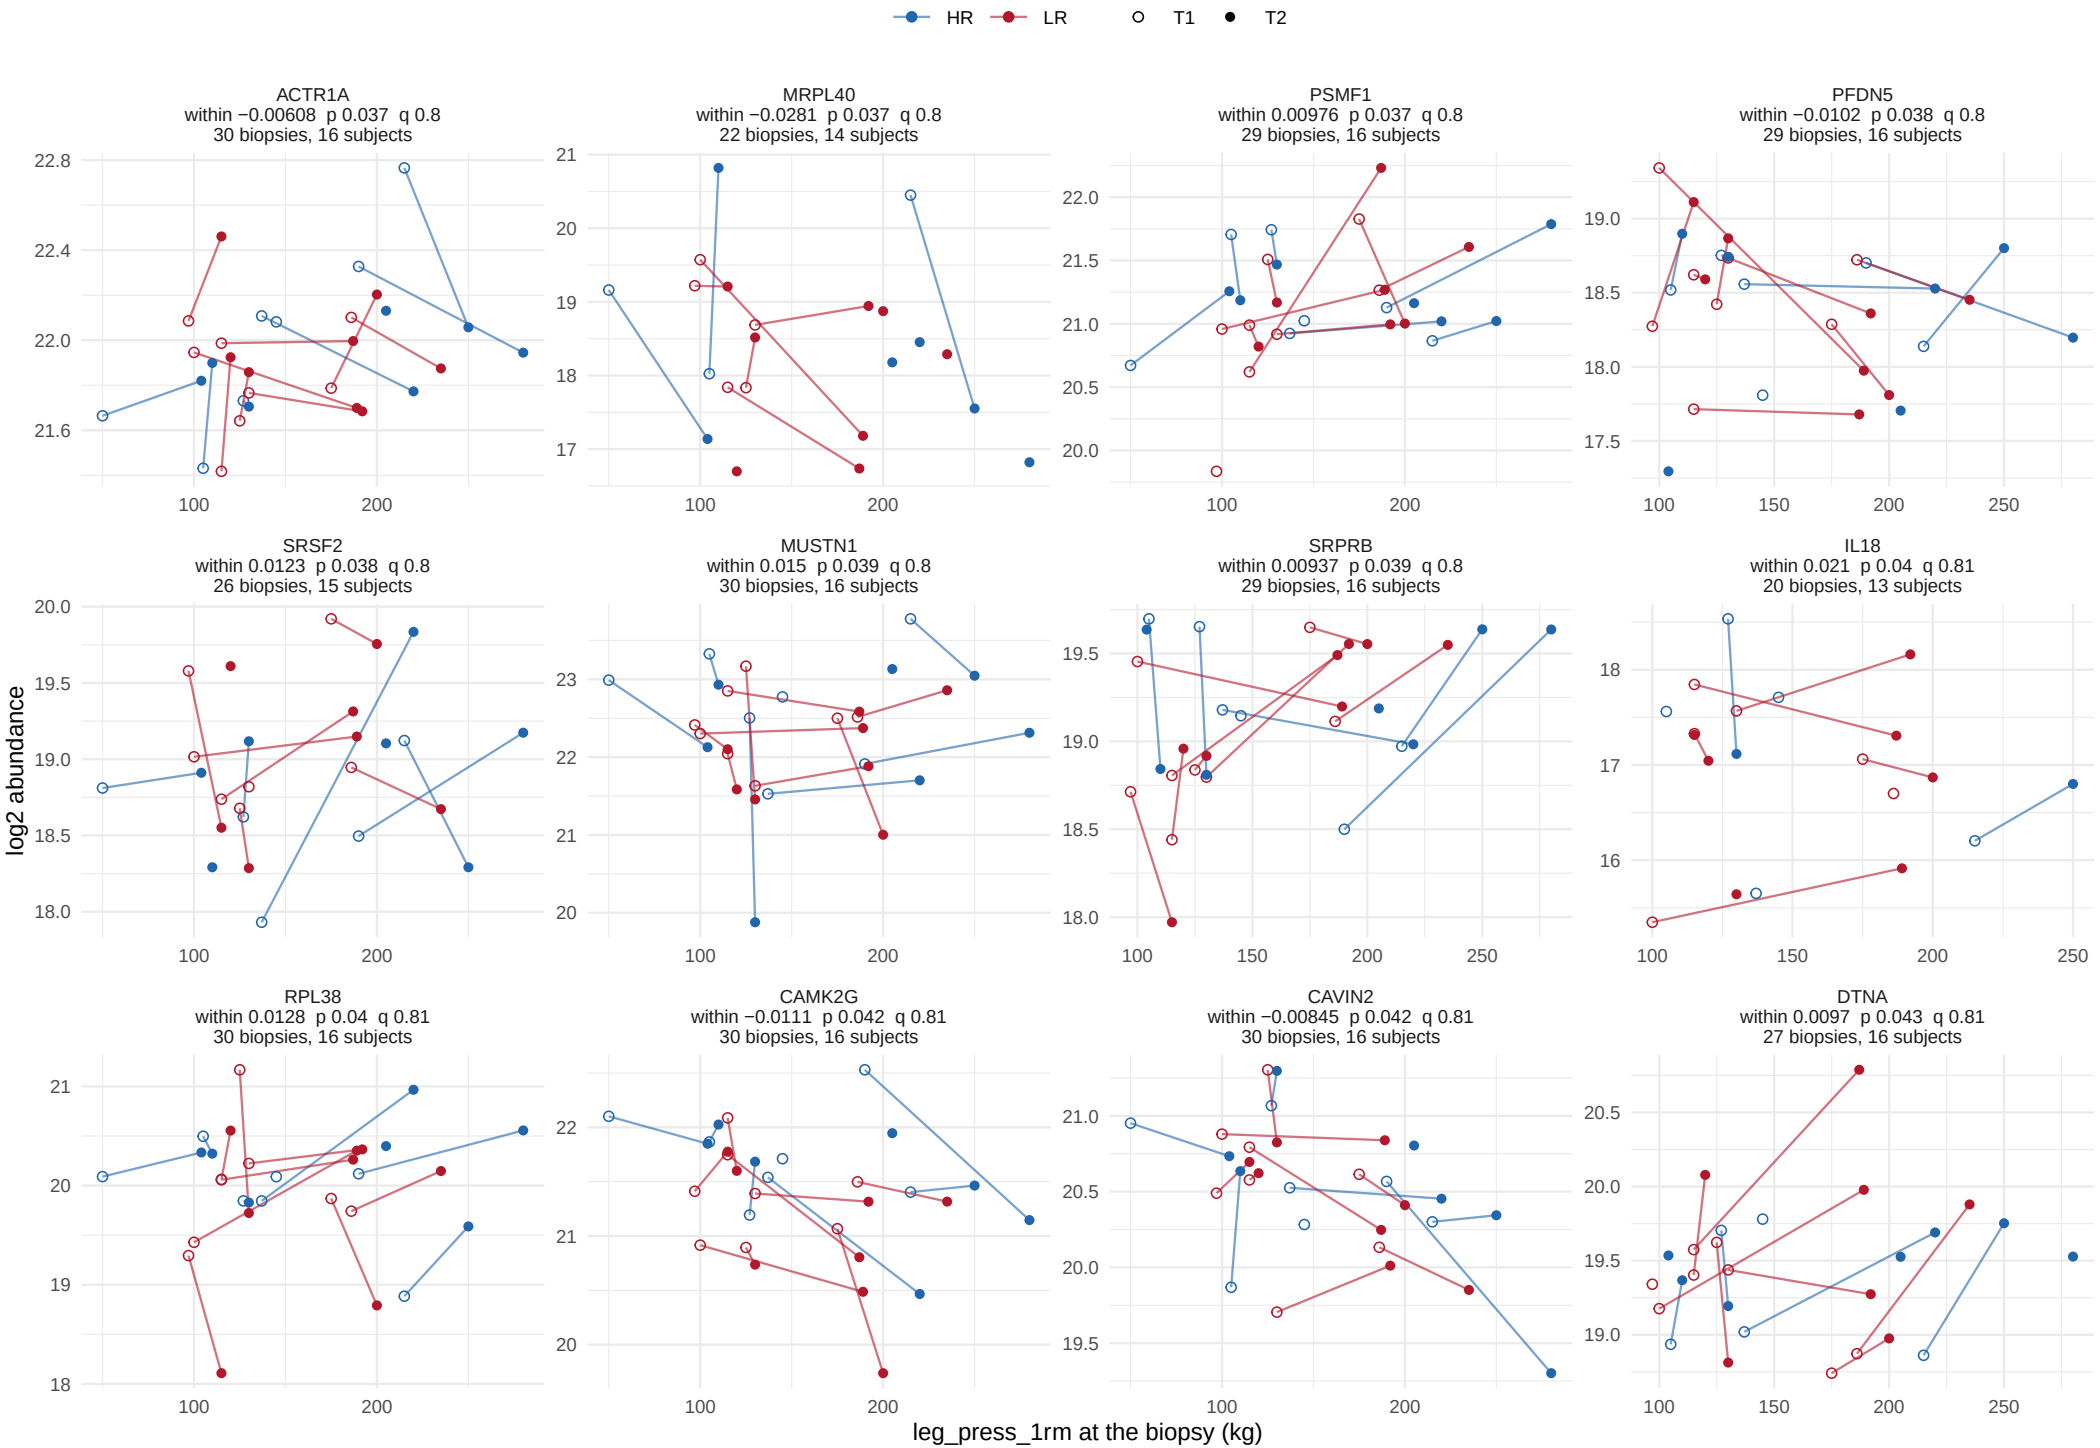

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_press_1rm, within−person term


101 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 8 of 9.

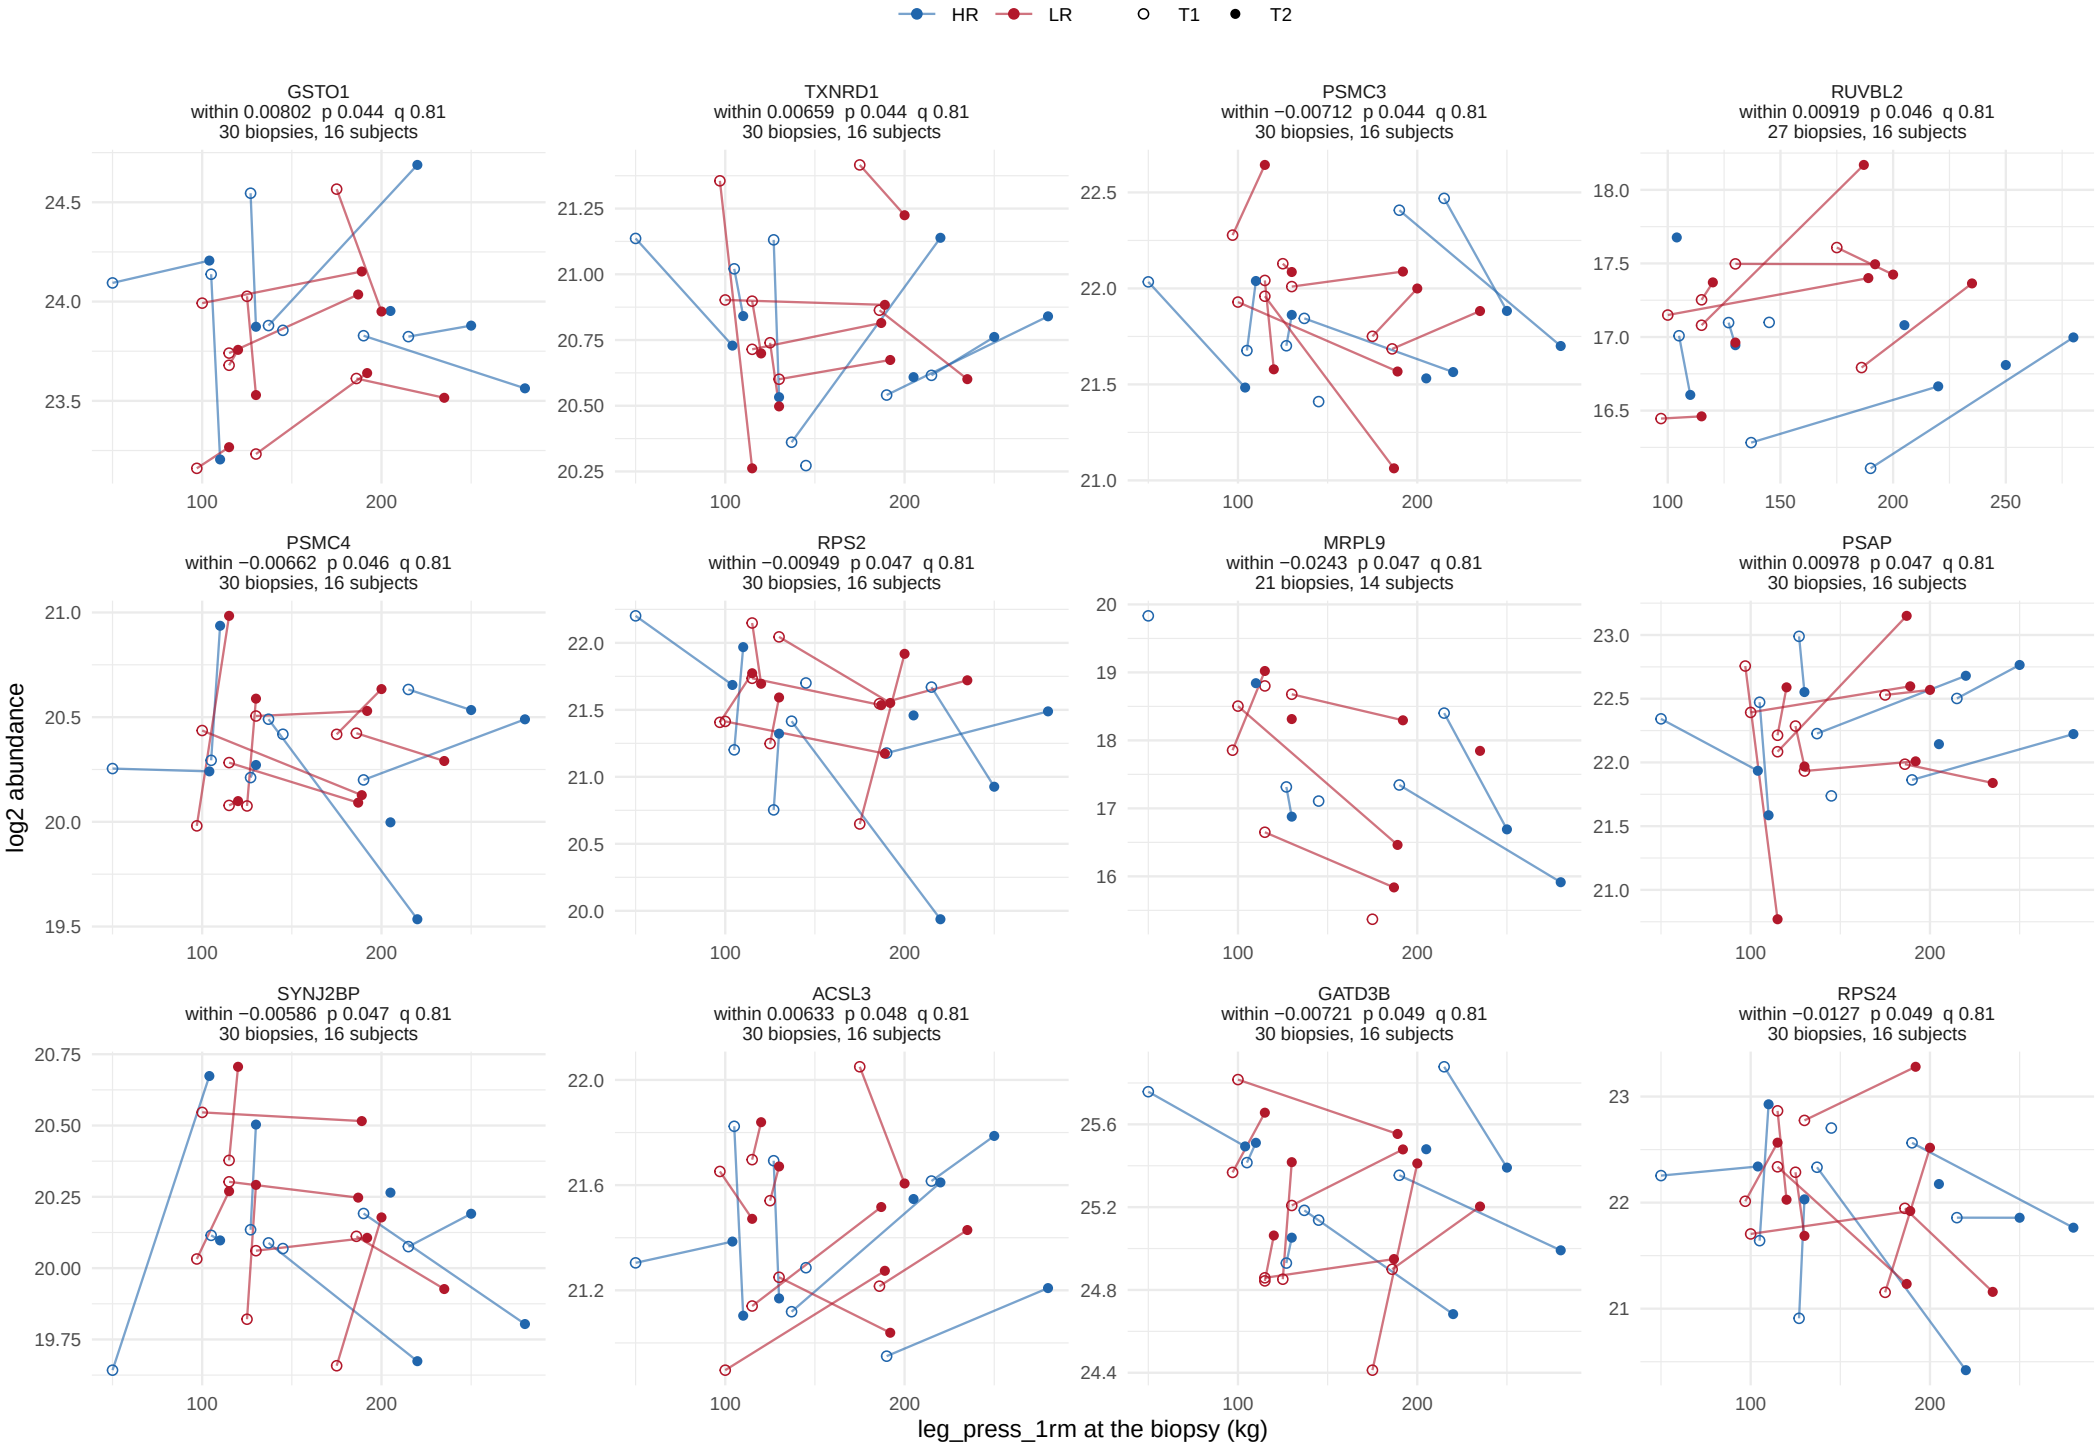

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_press_1rm, within−person term


101 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 9 of 9.

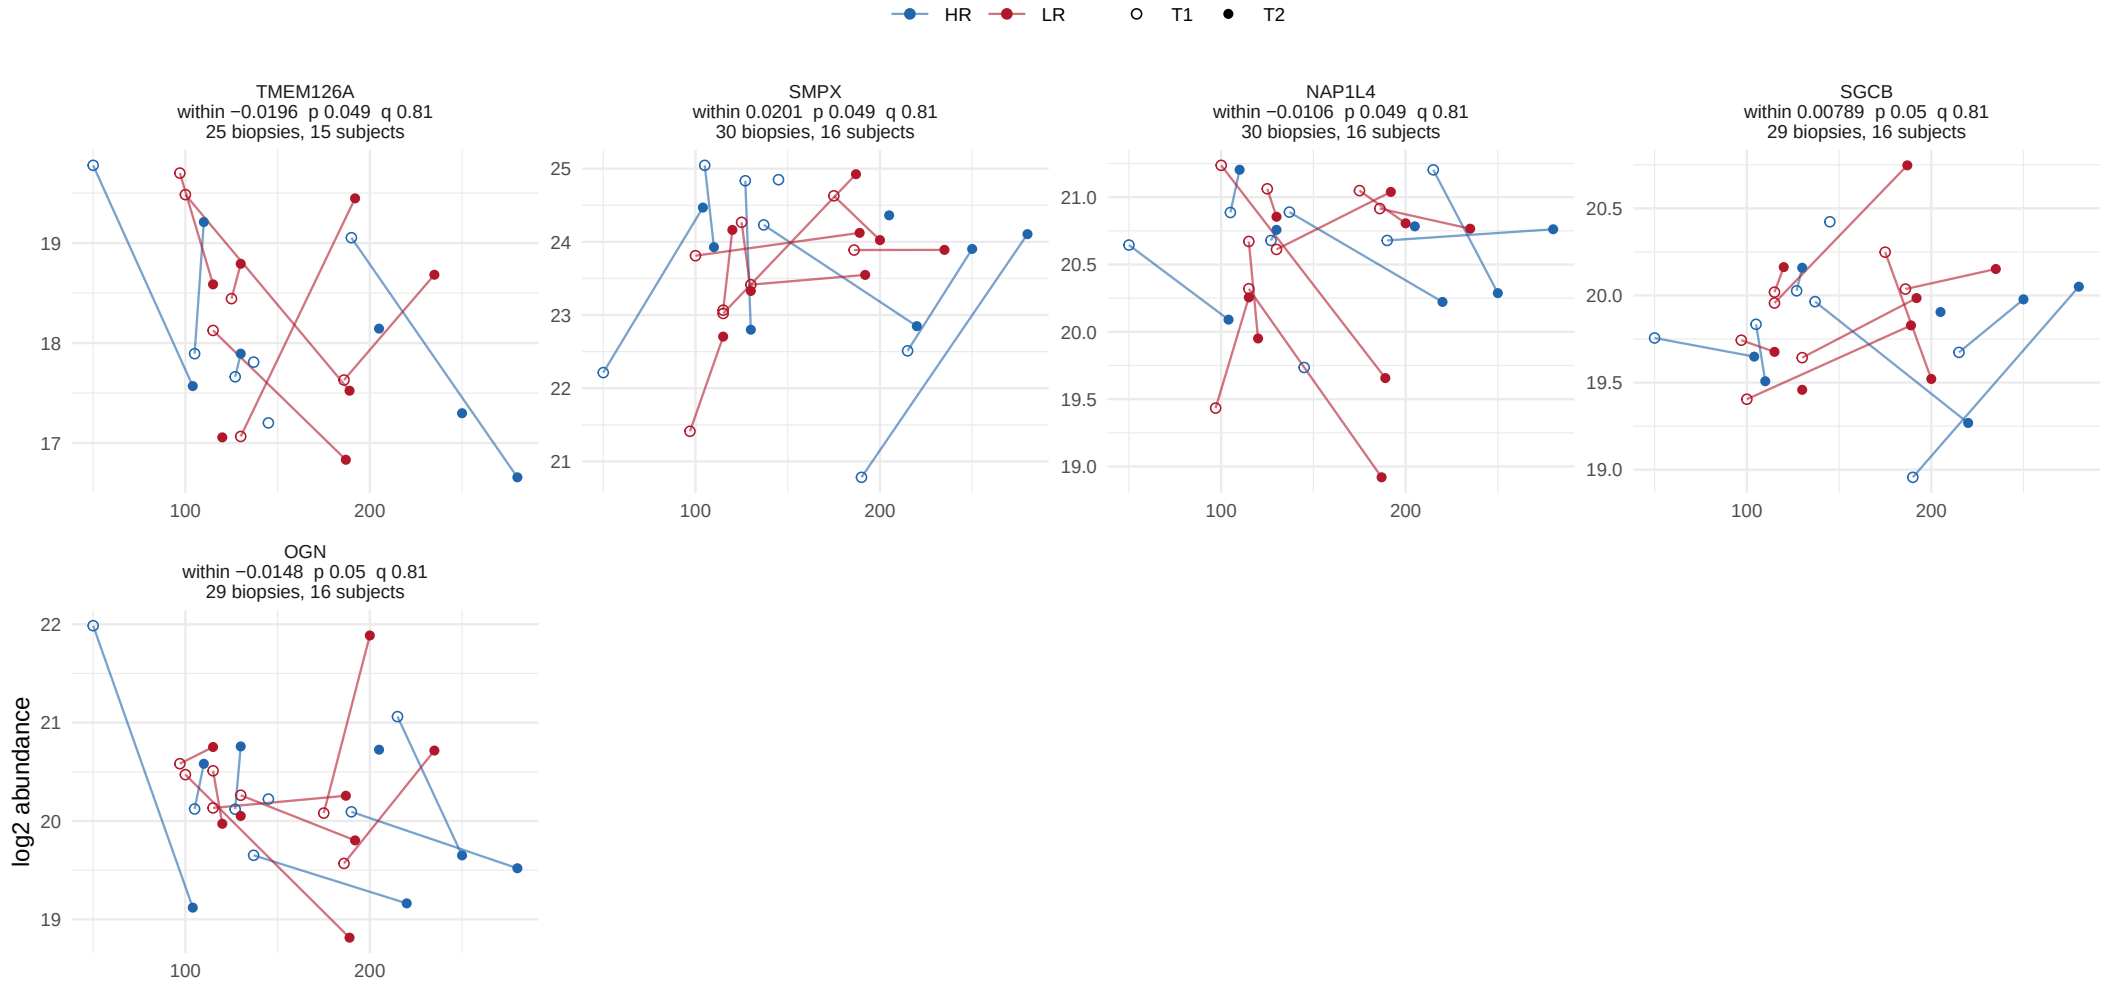

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_press_1rm, between−person term


119 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 1 of 10.

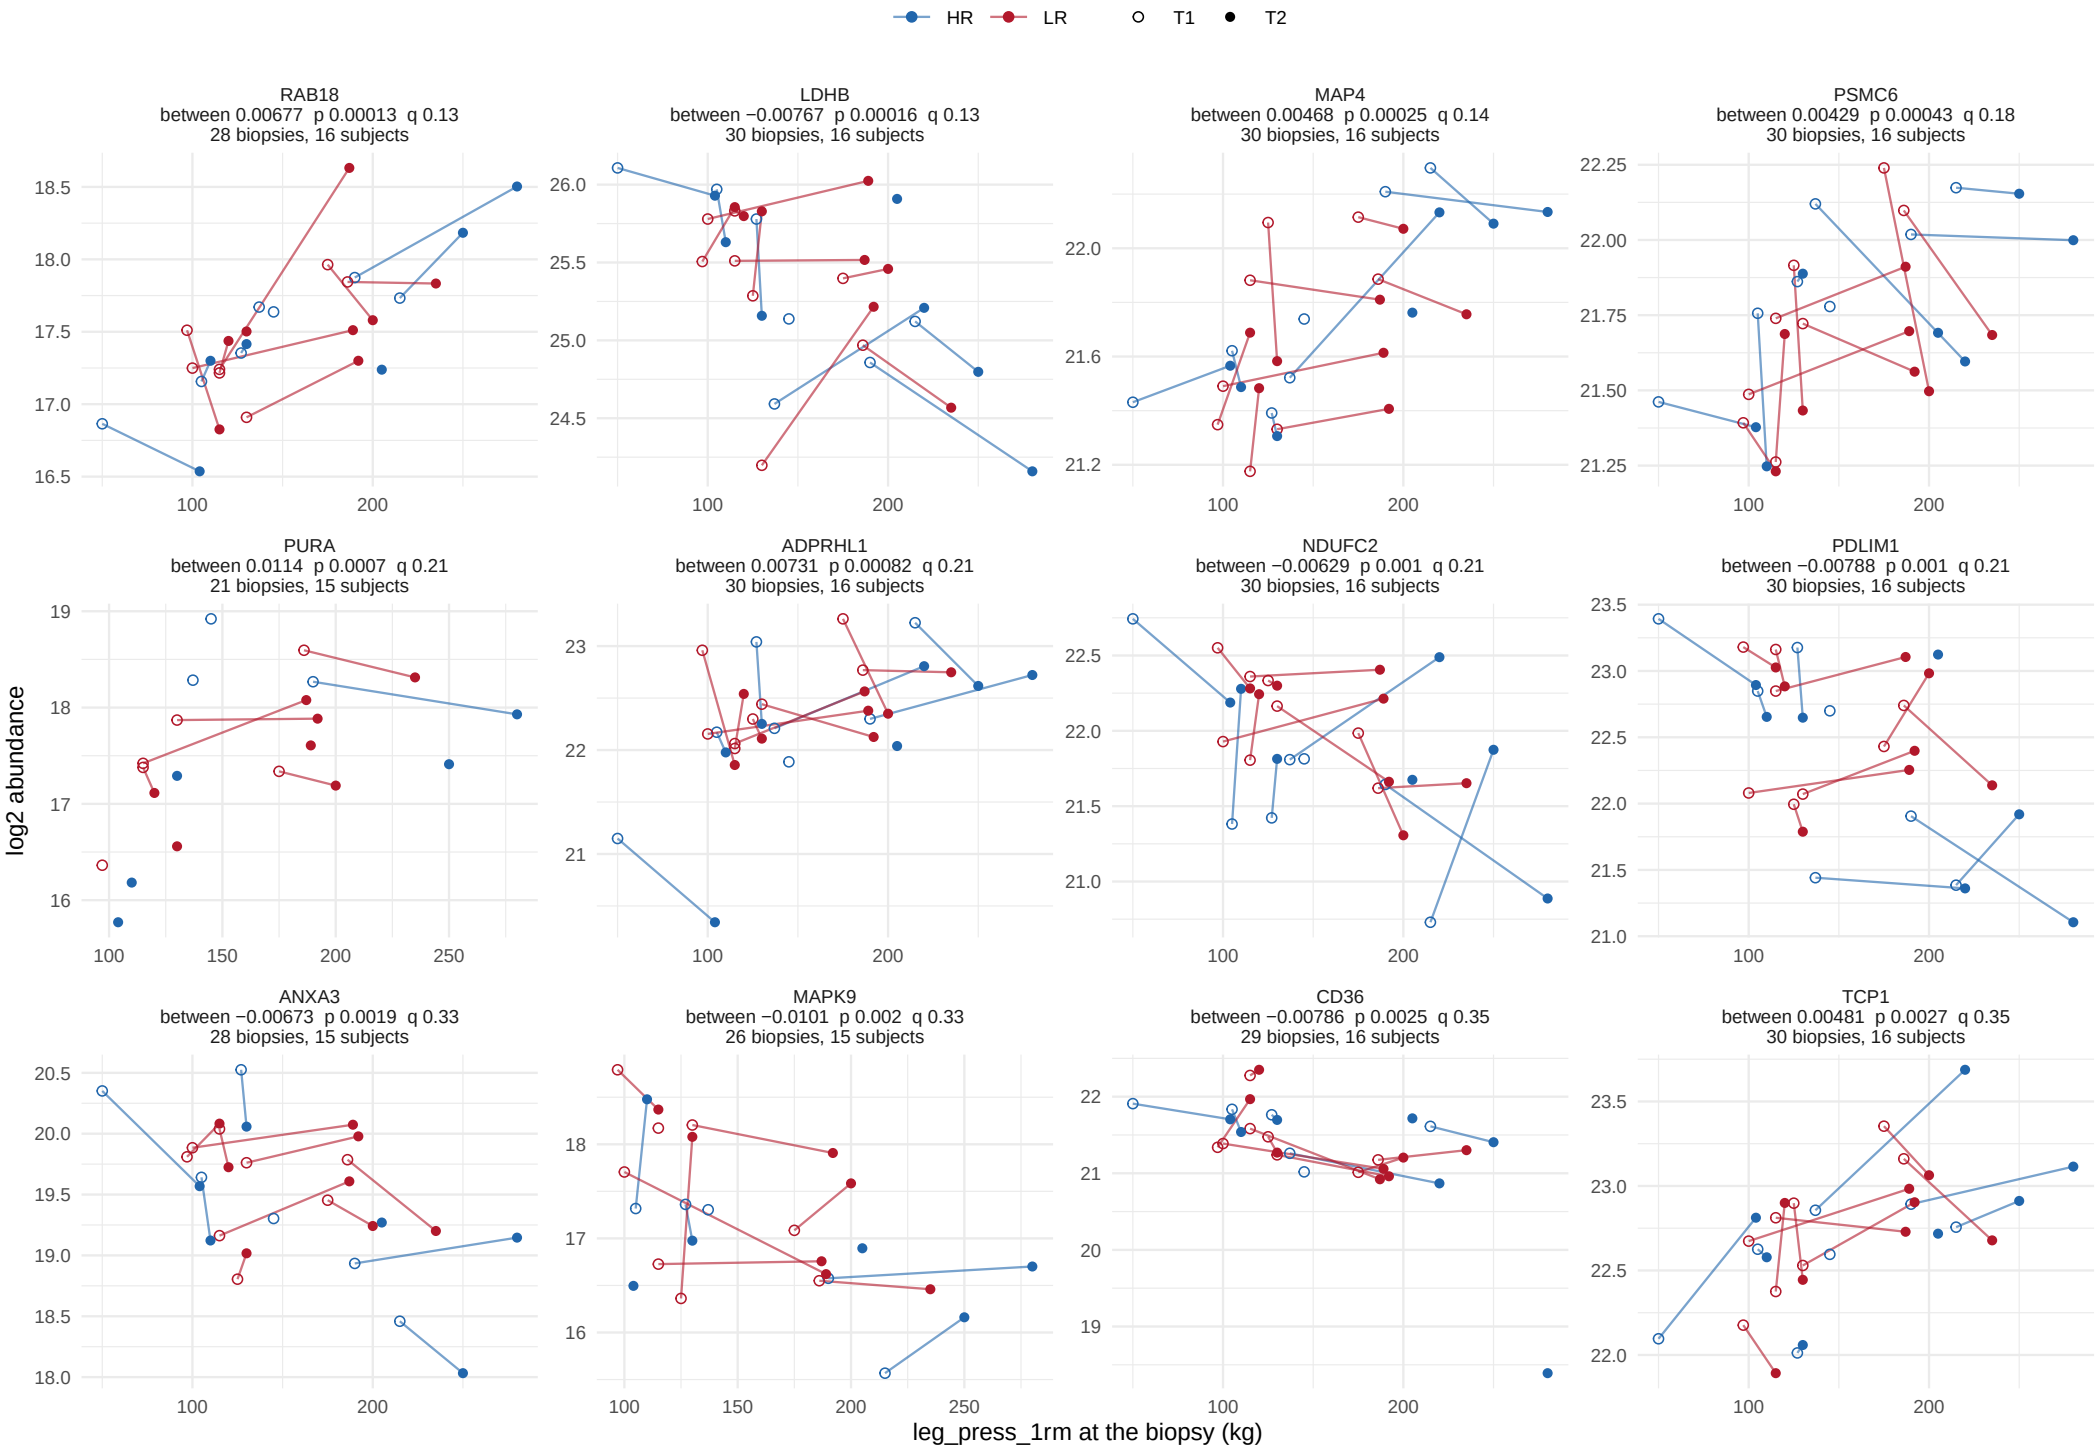

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_press_1rm, between−person term


119 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 2 of 10.

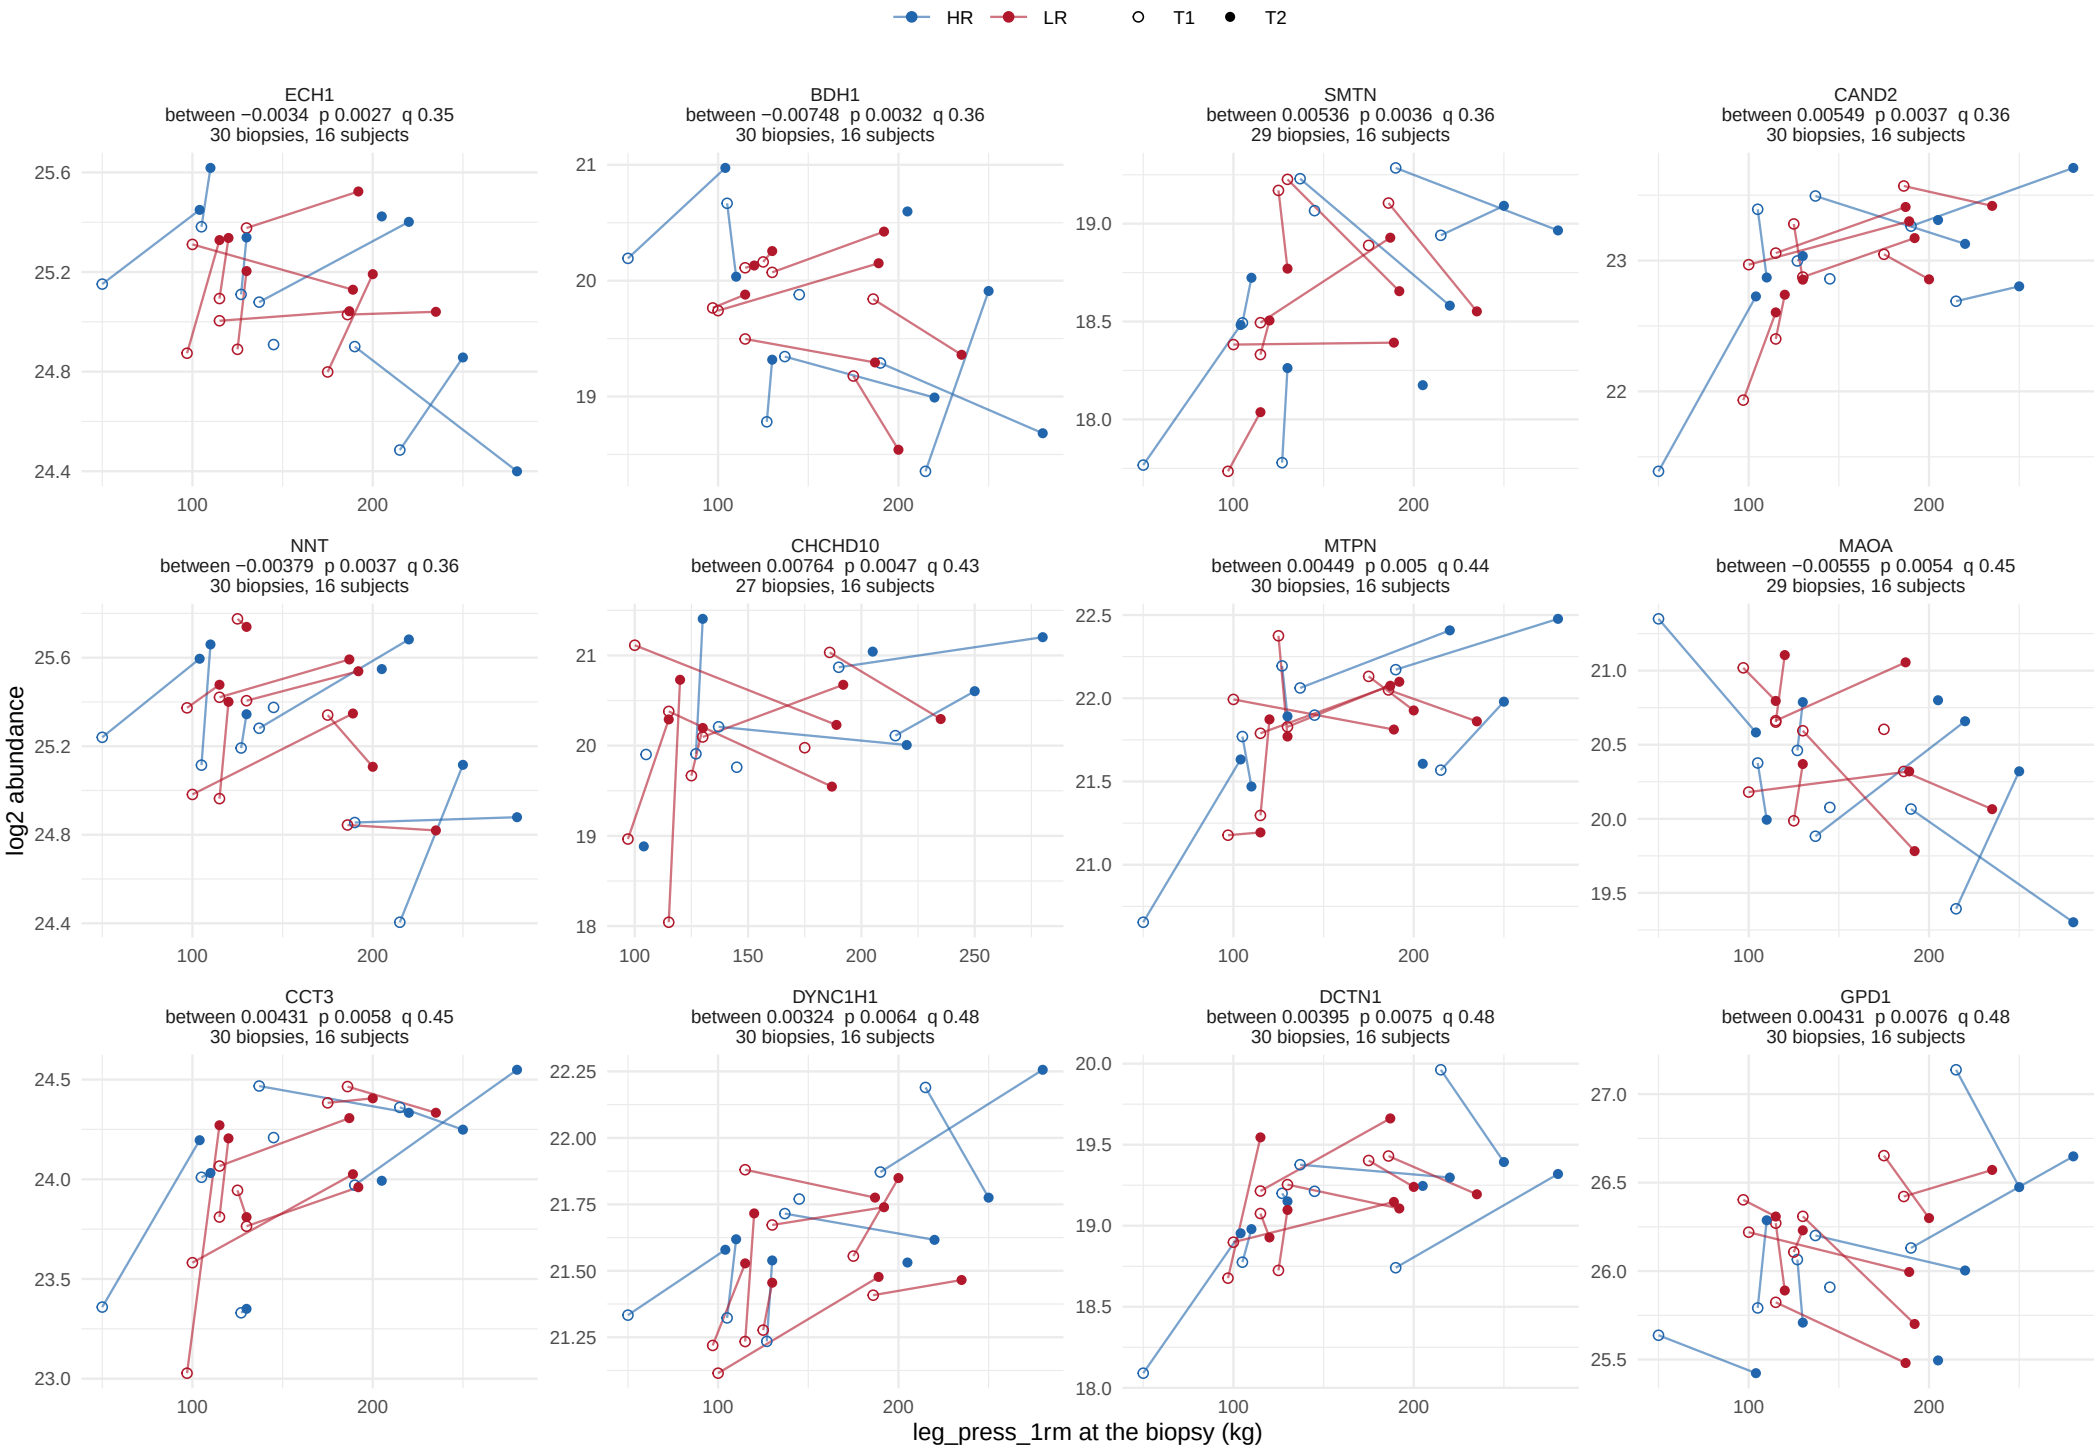

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_press_1rm, between−person term


119 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 3 of 10.

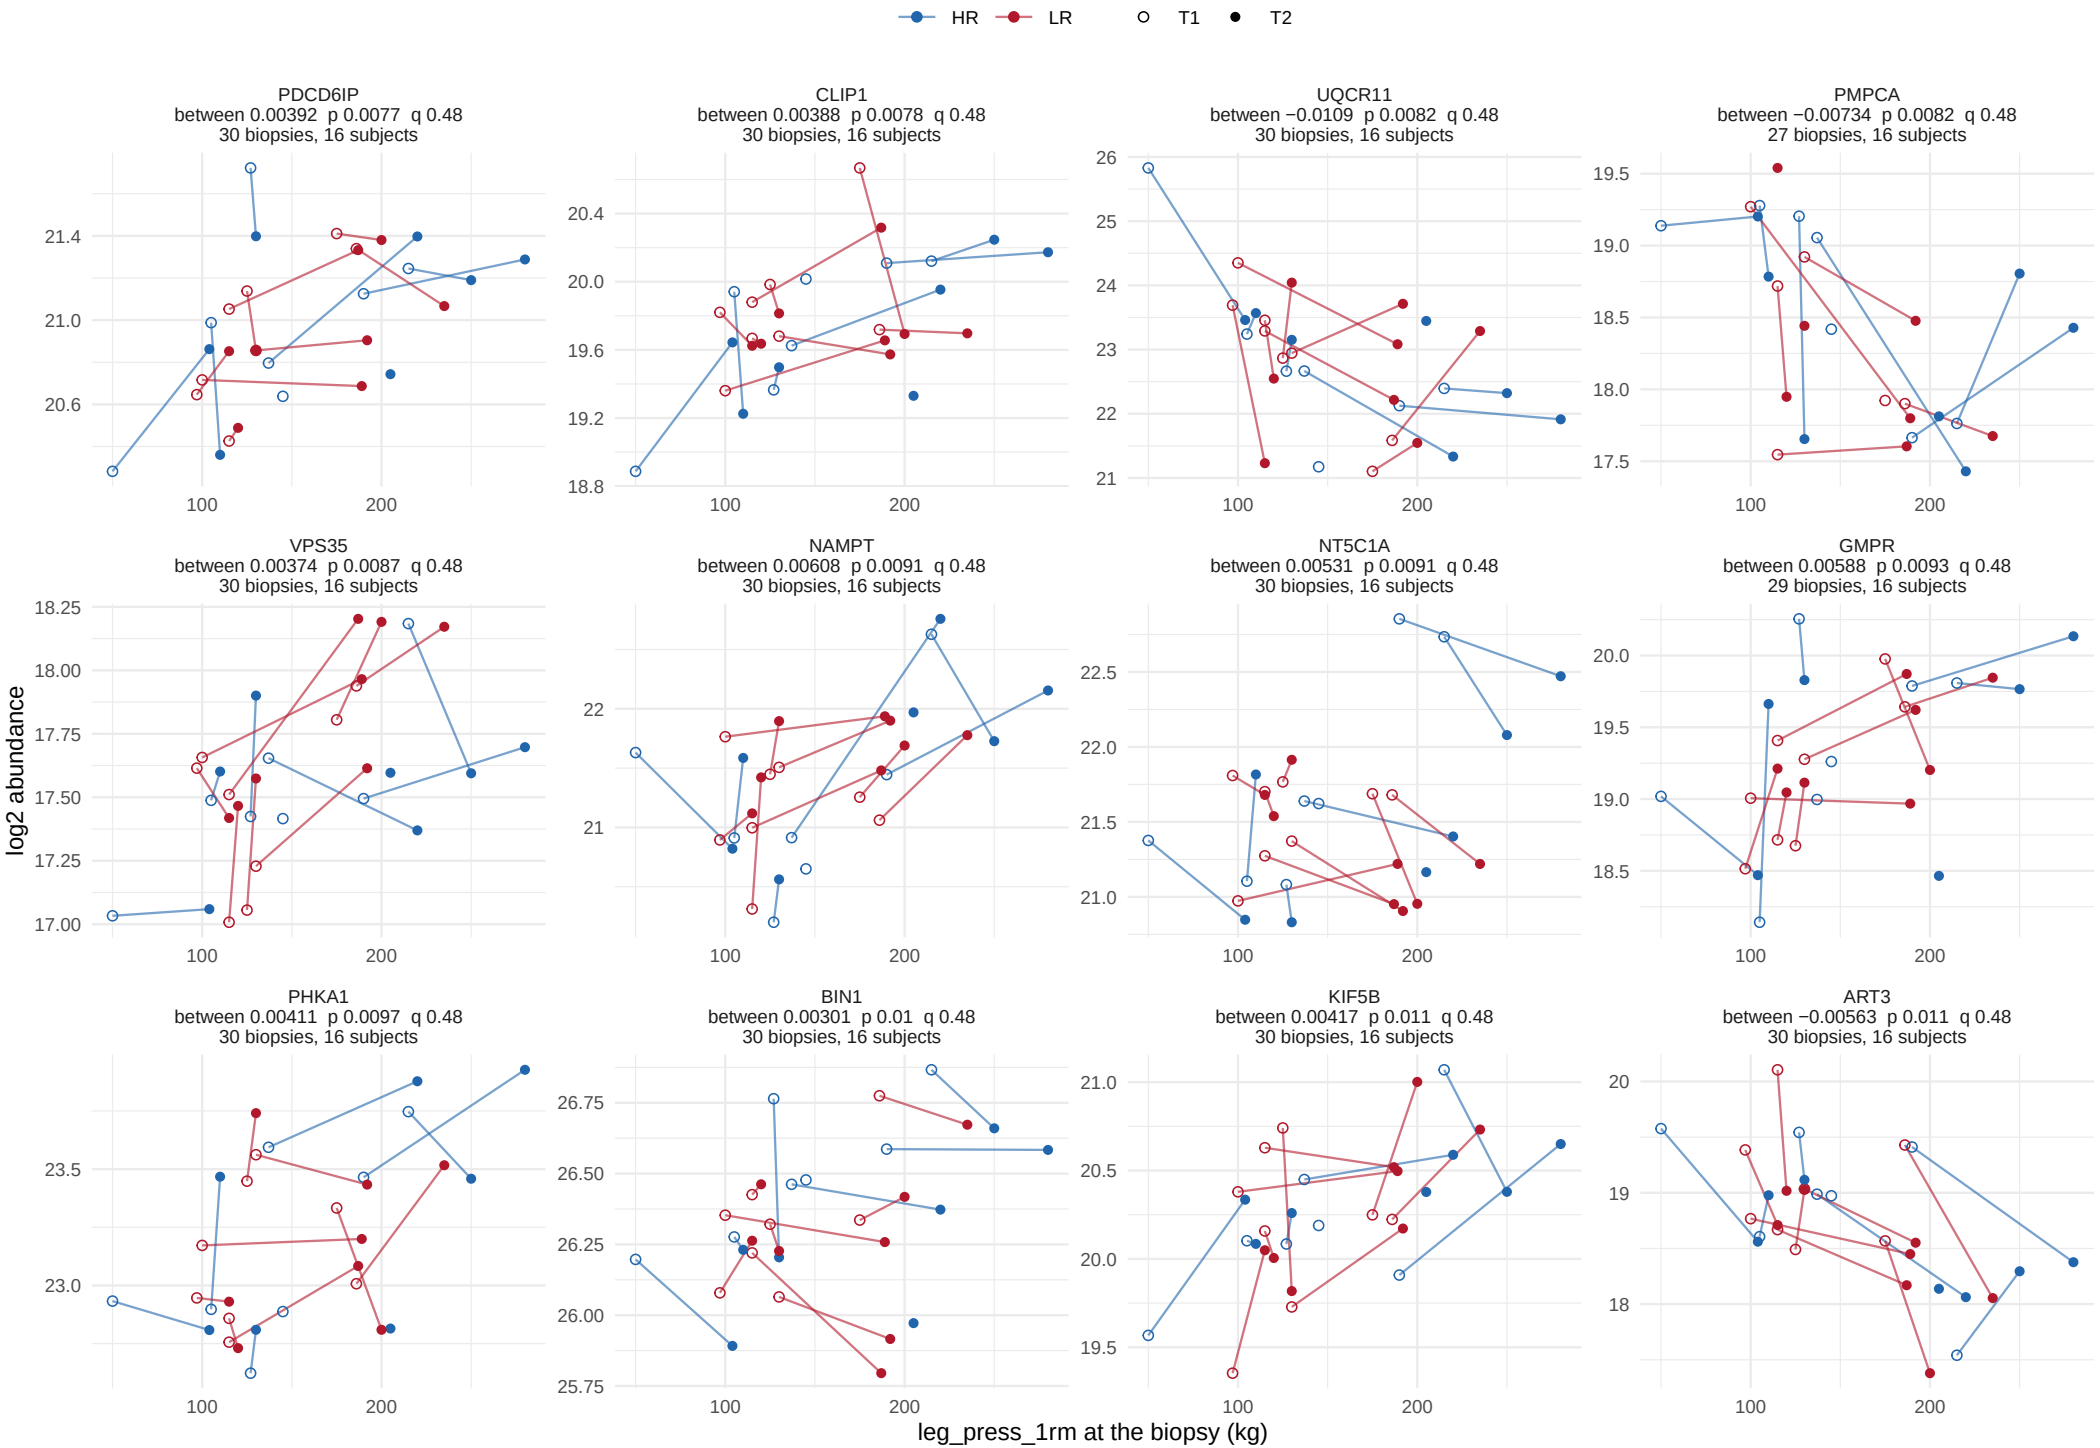

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_press_1rm, between−person term


119 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 4 of 10.

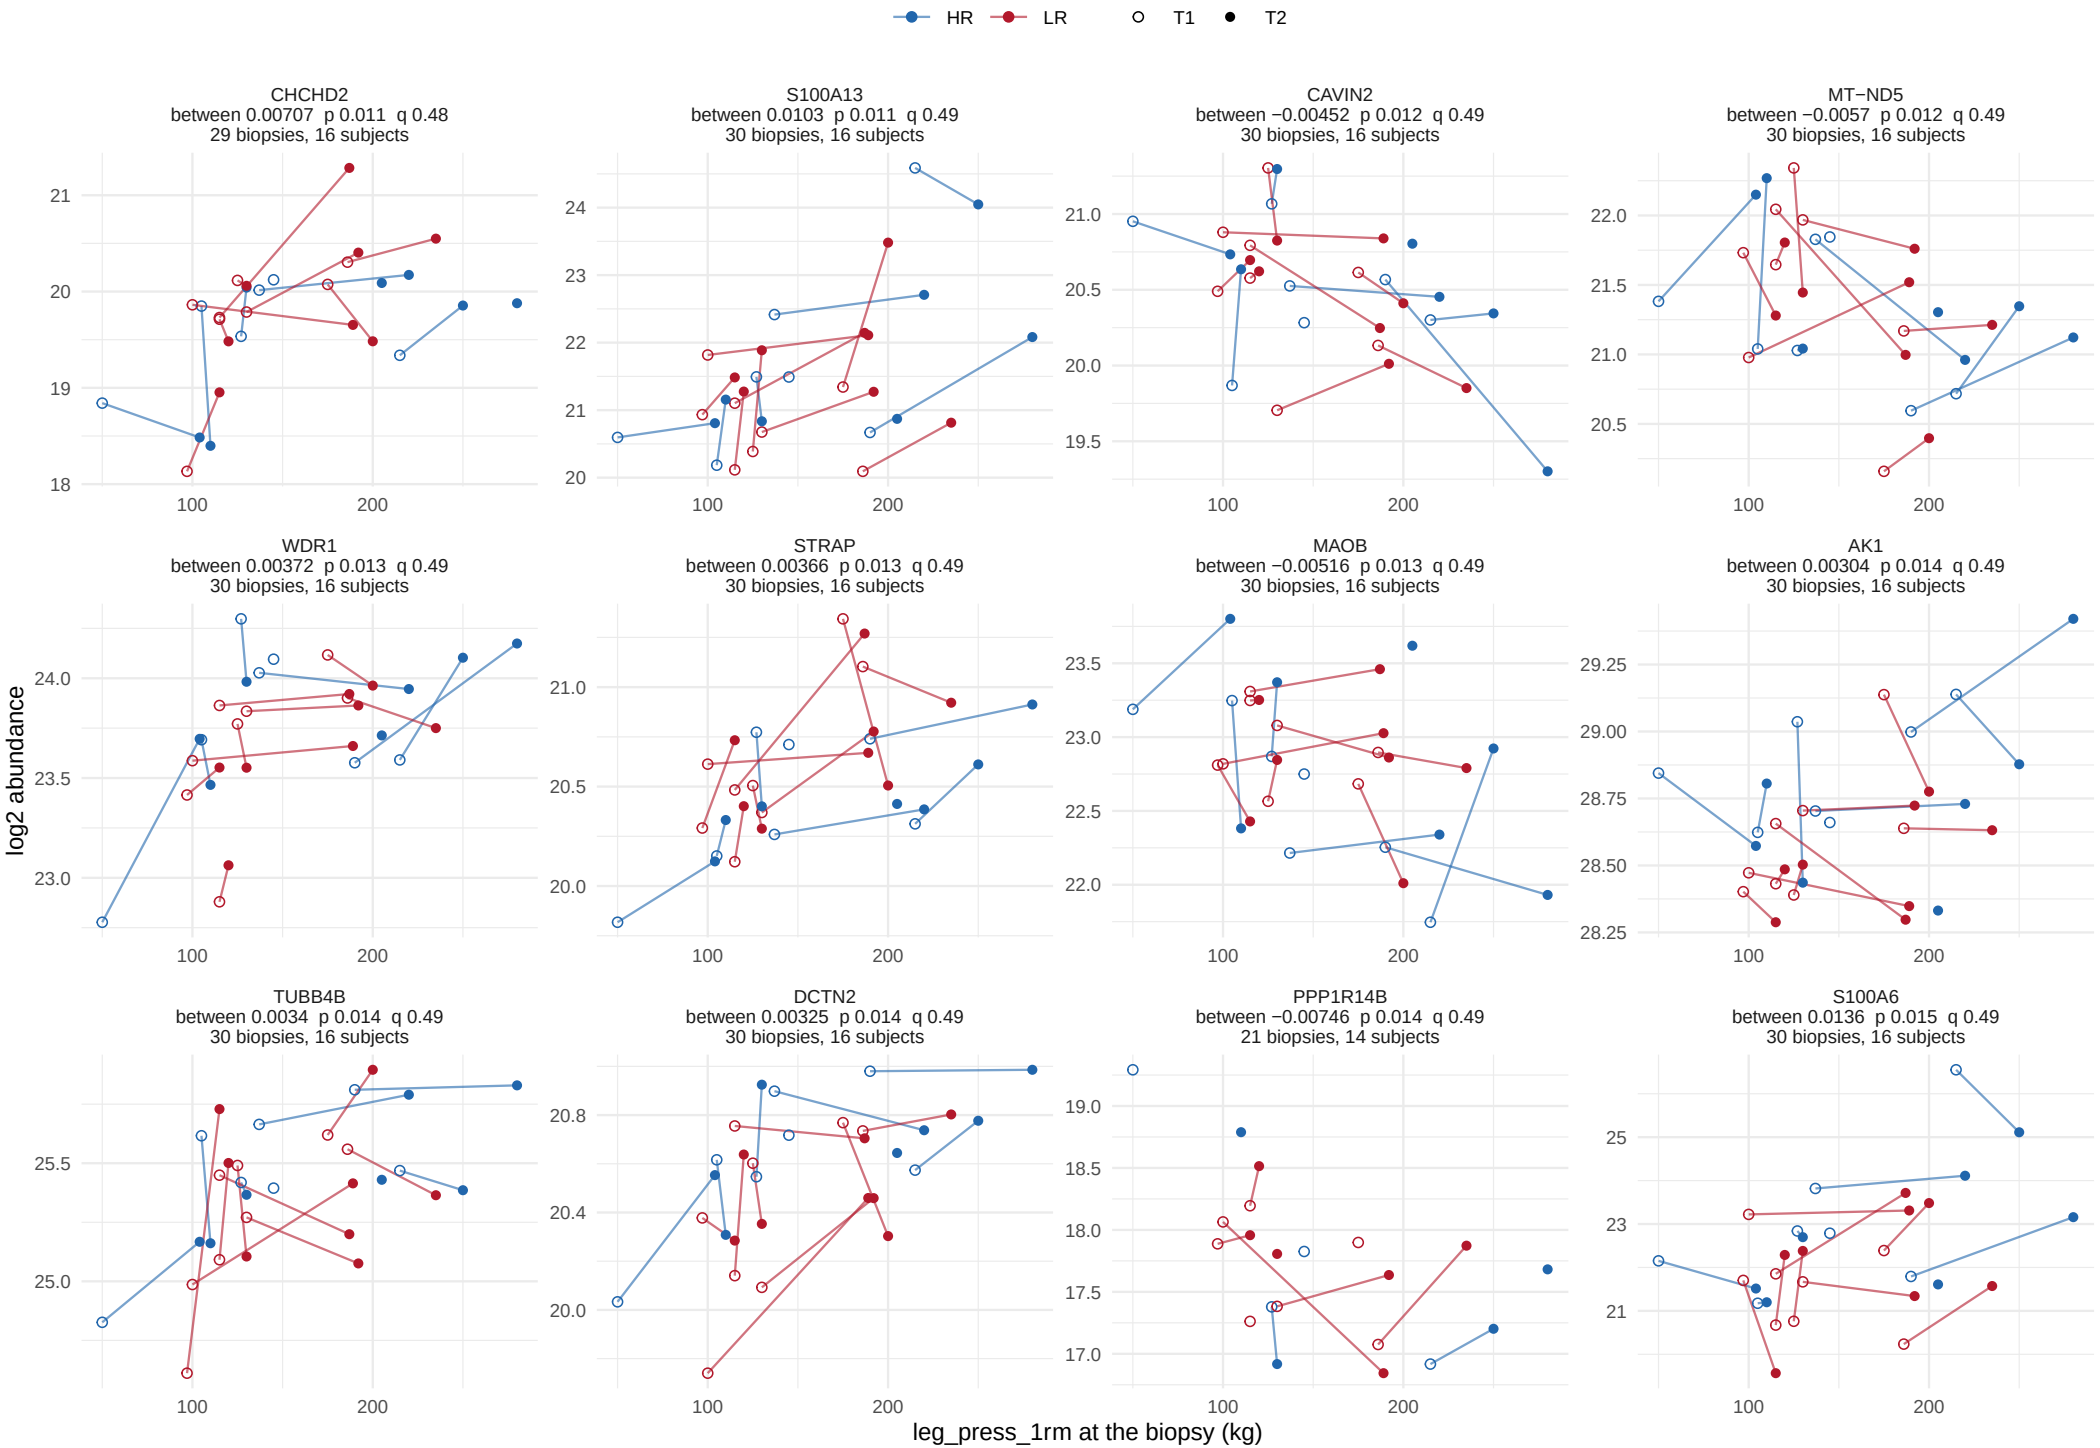

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_press_1rm, between−person term


119 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 5 of 10.

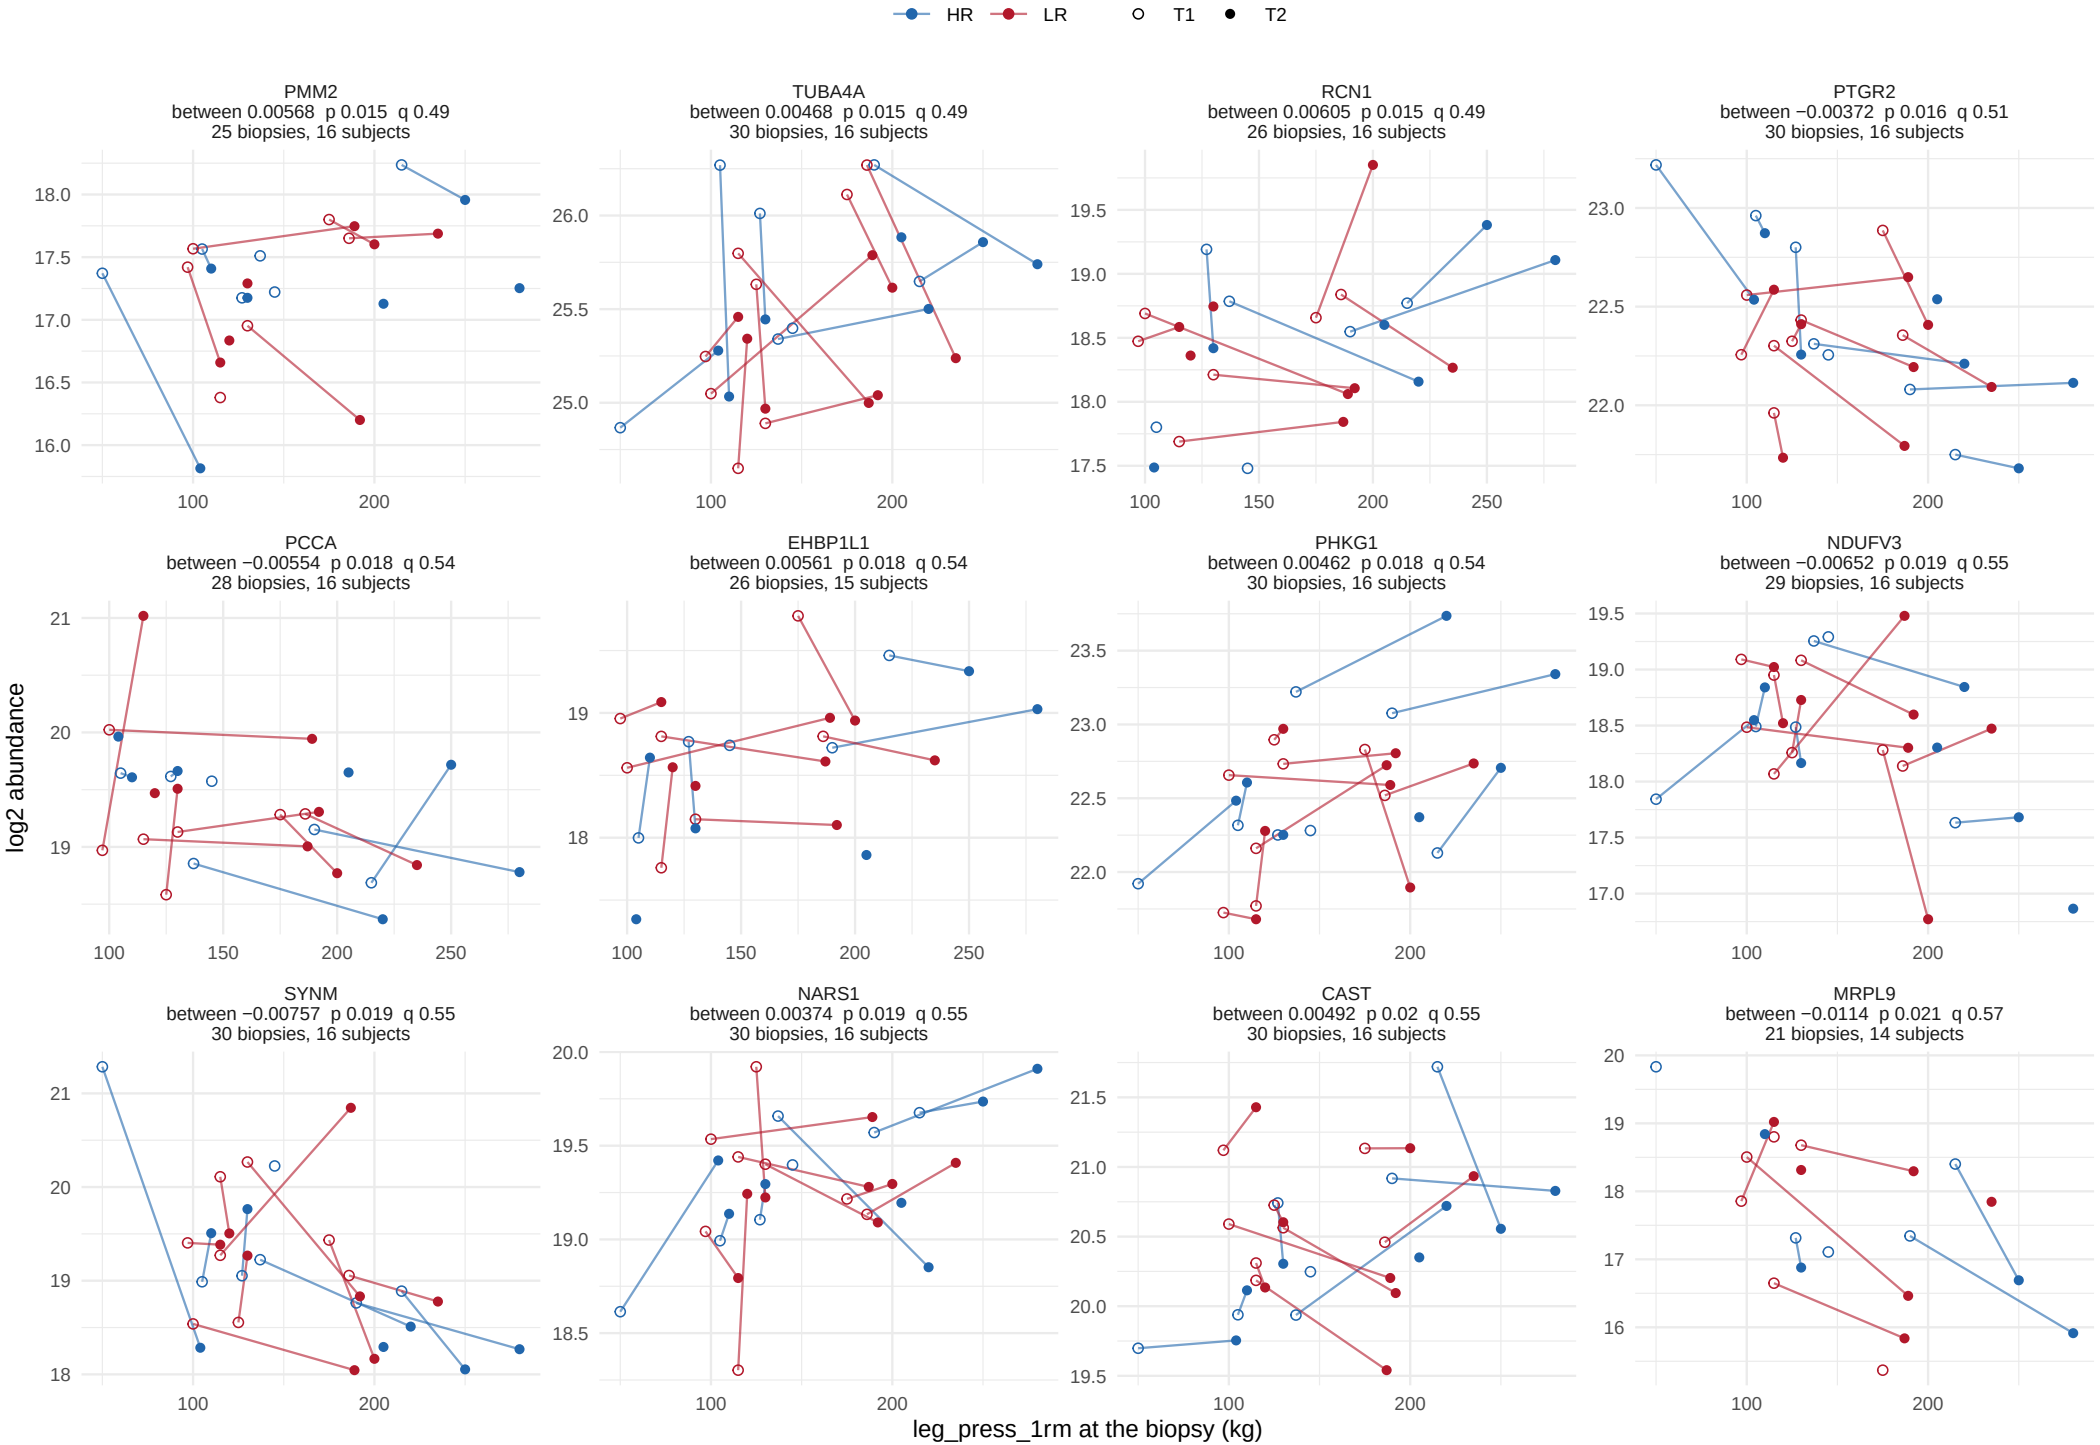

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_press_1rm, between−person term


119 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 6 of 10.

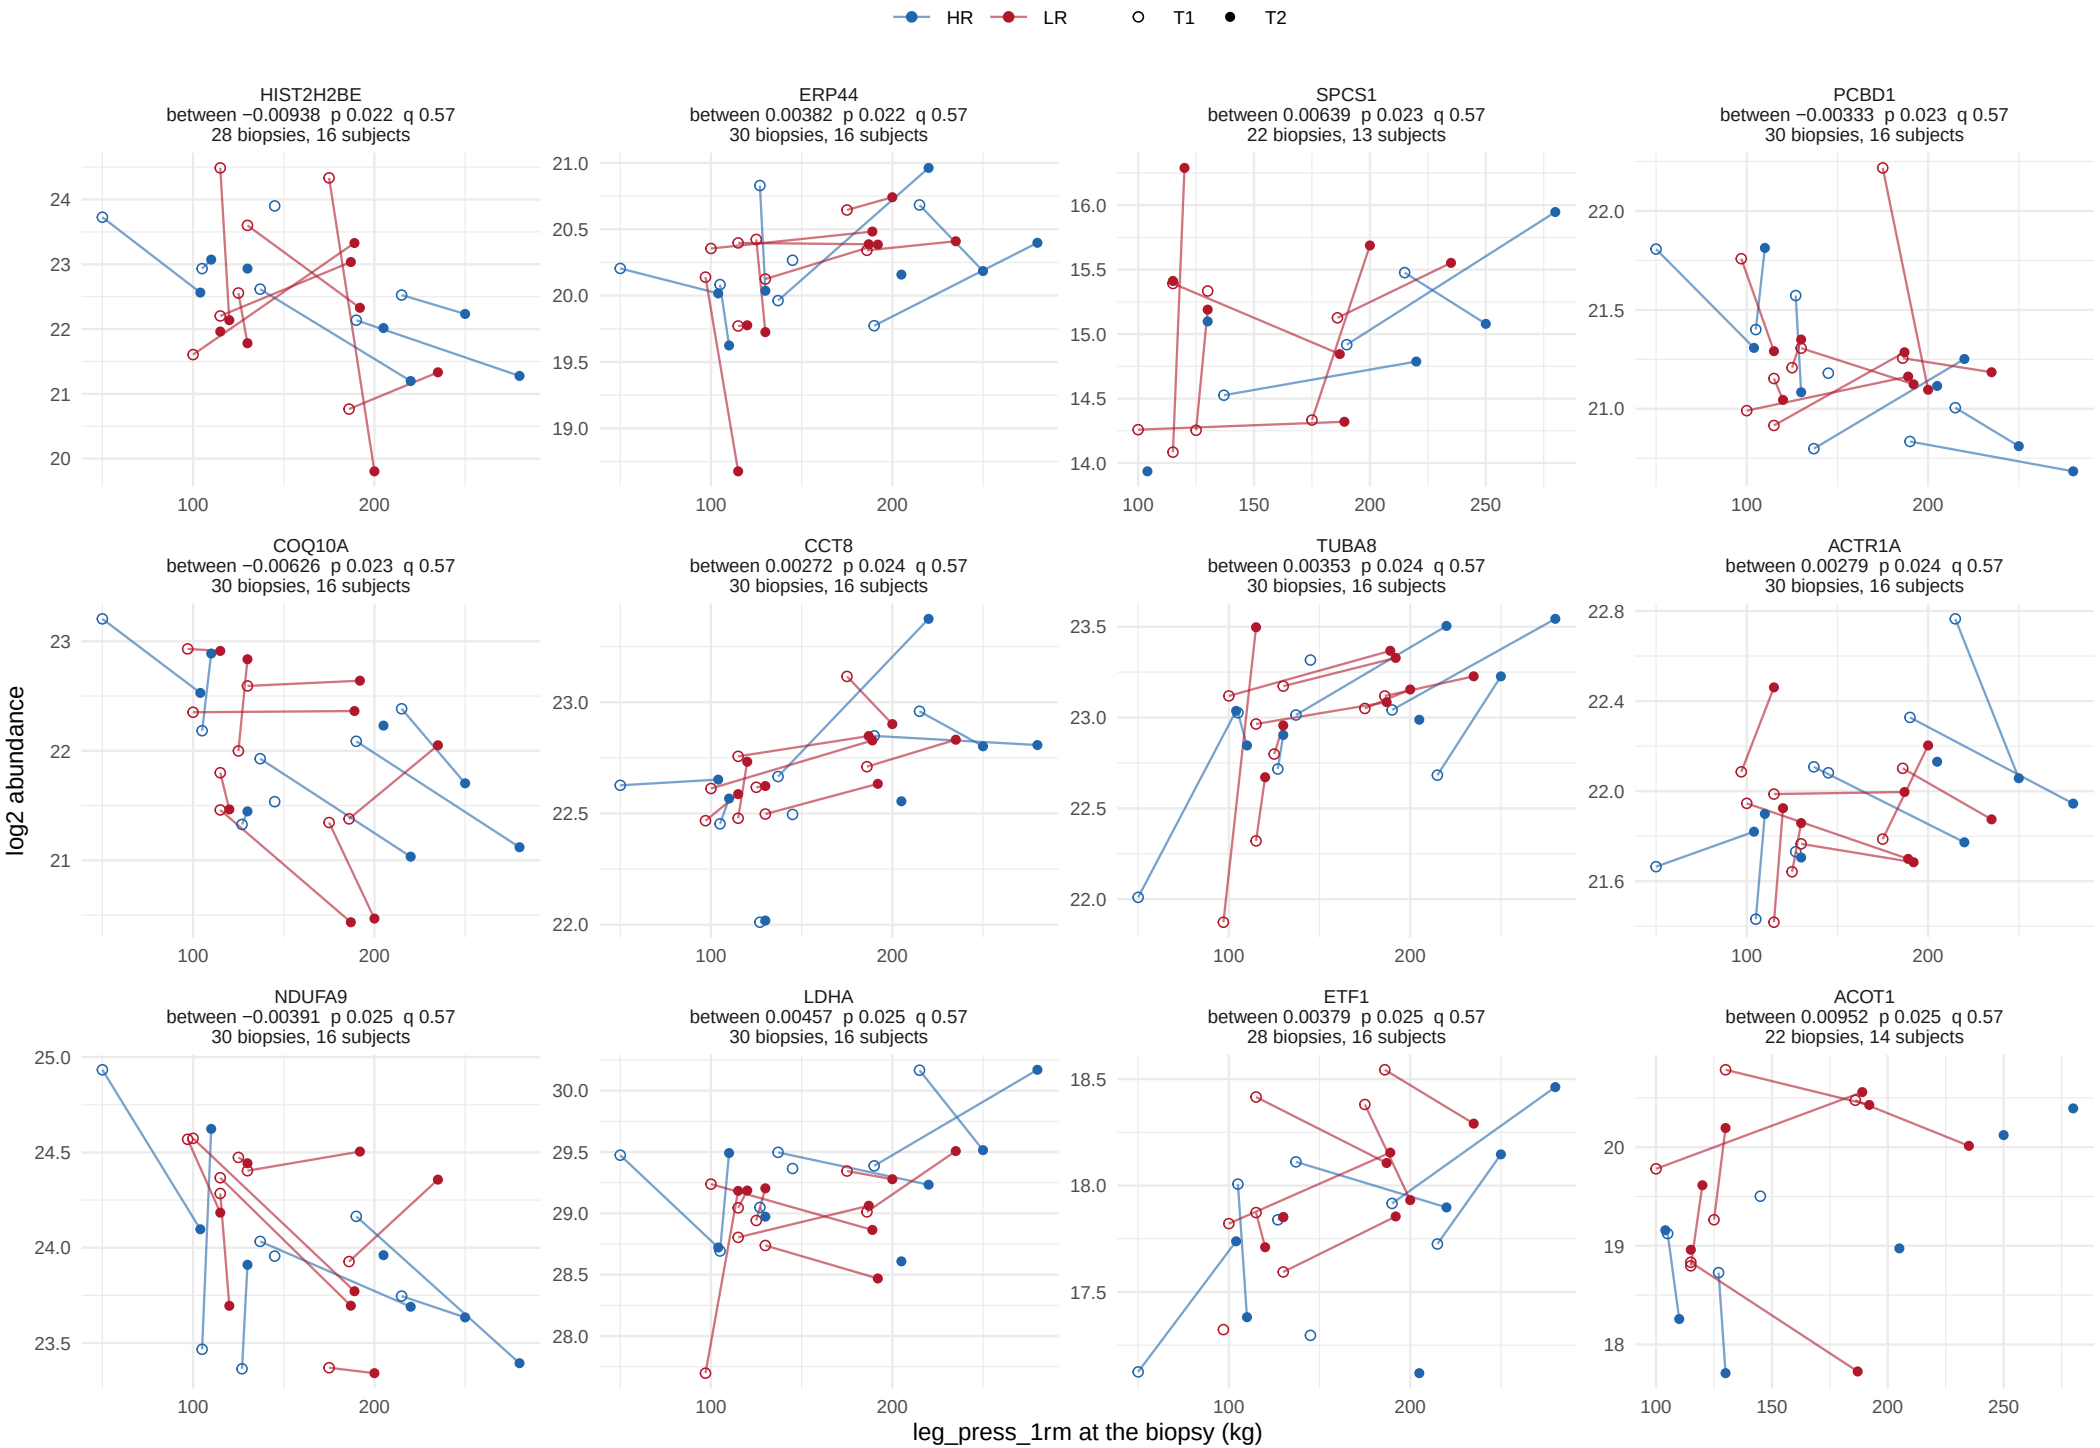

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_press_1rm, between−person term


119 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 7 of 10.

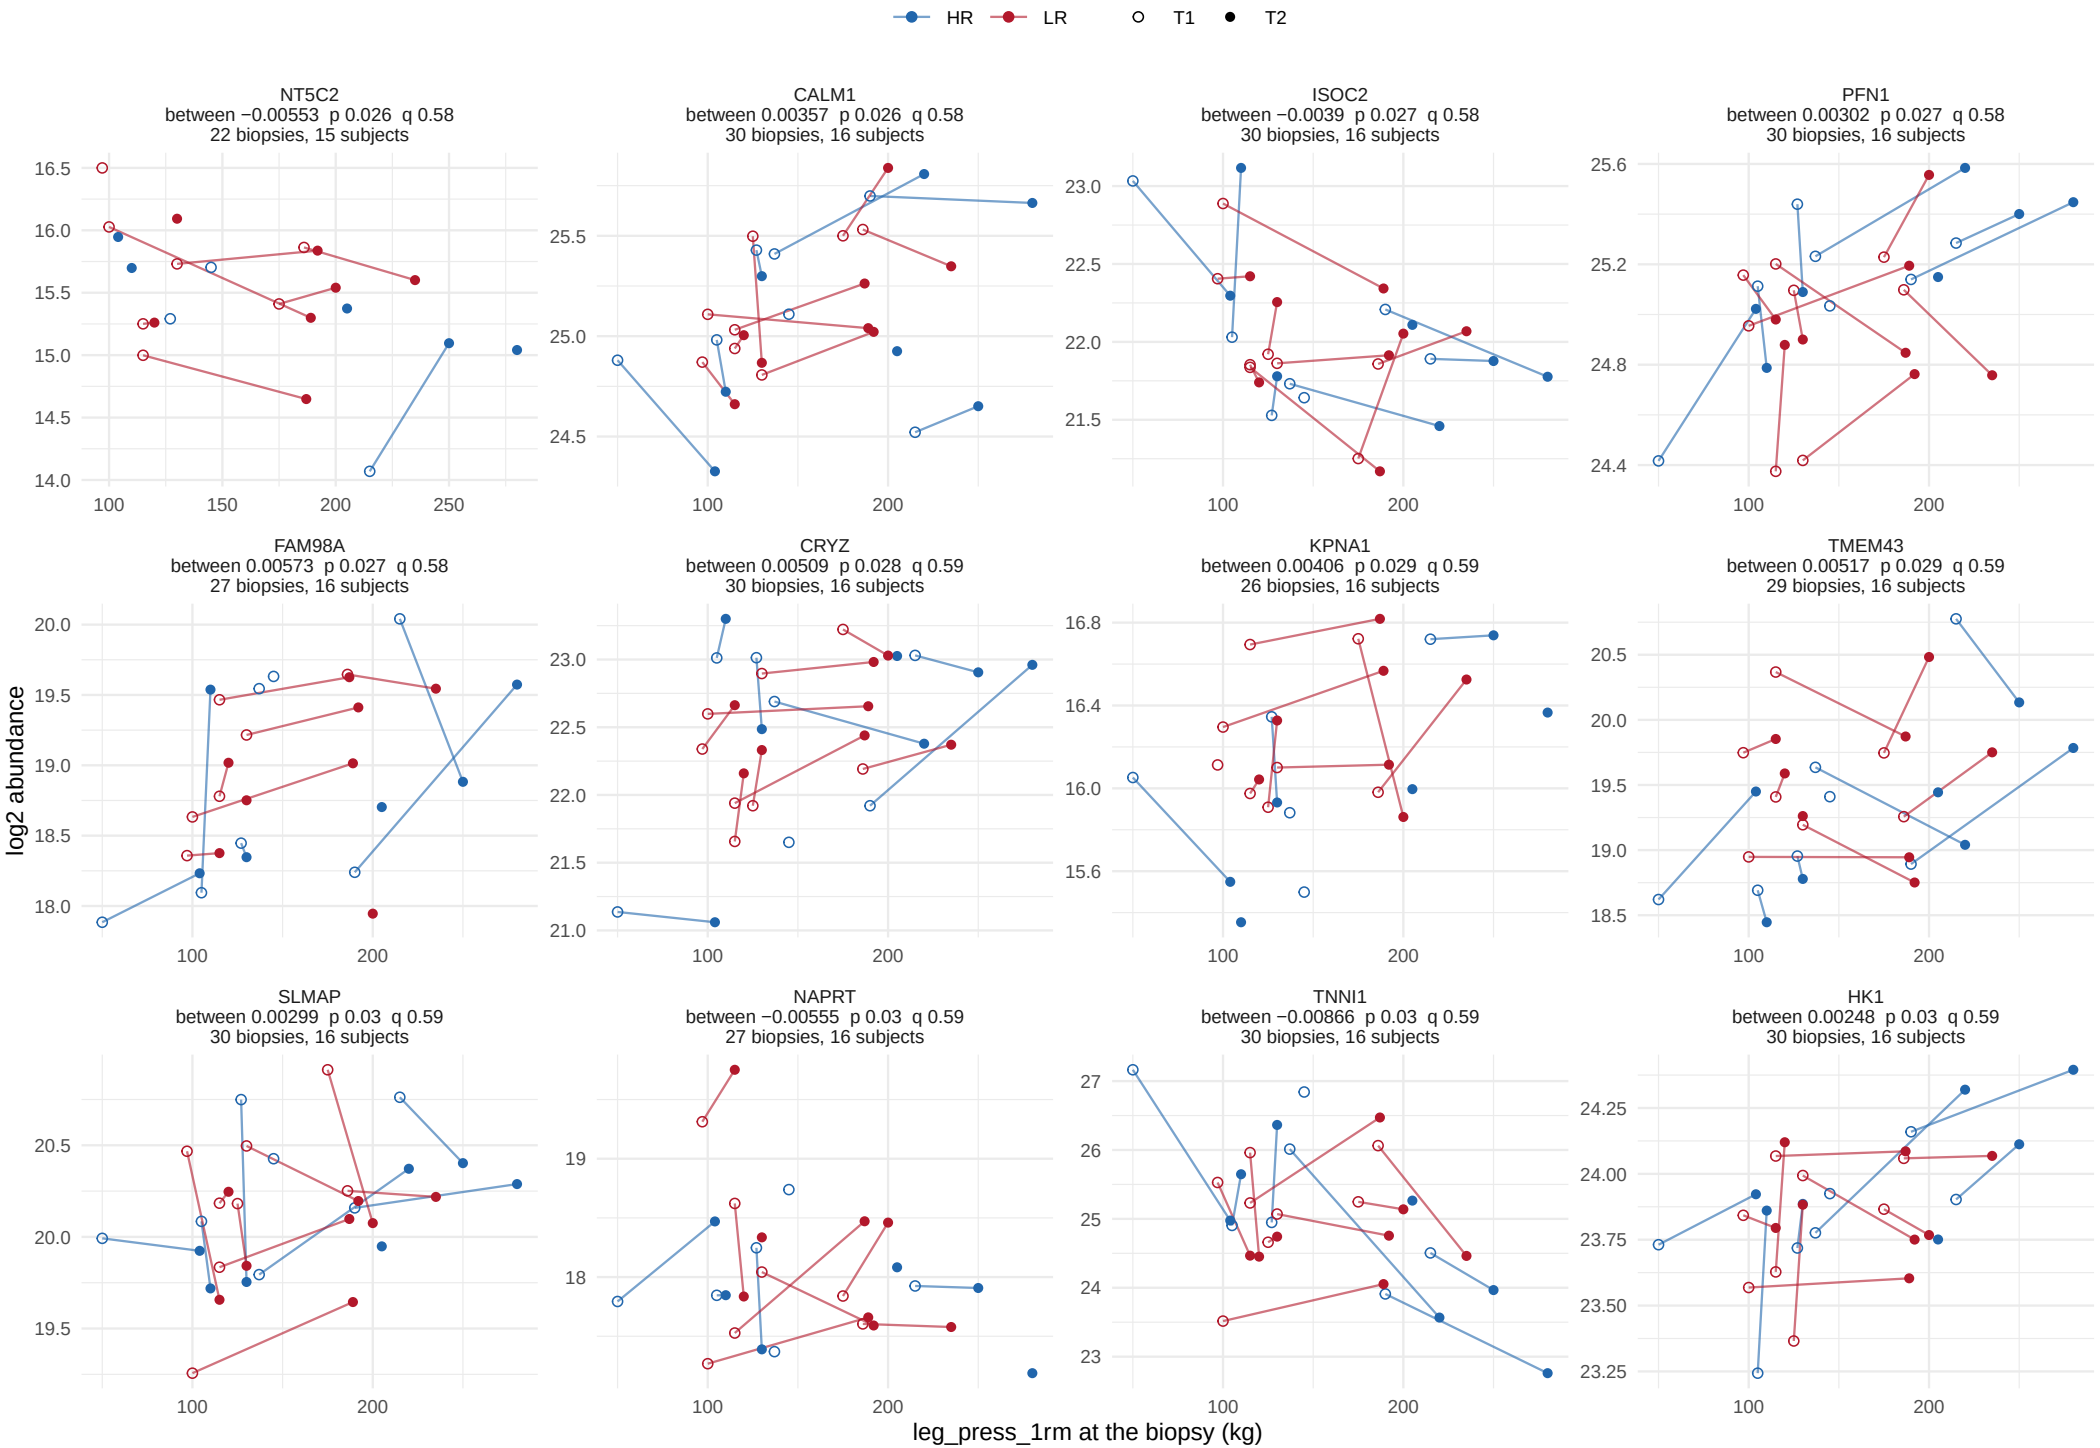

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_press_1rm, between−person term


119 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 8 of 10.

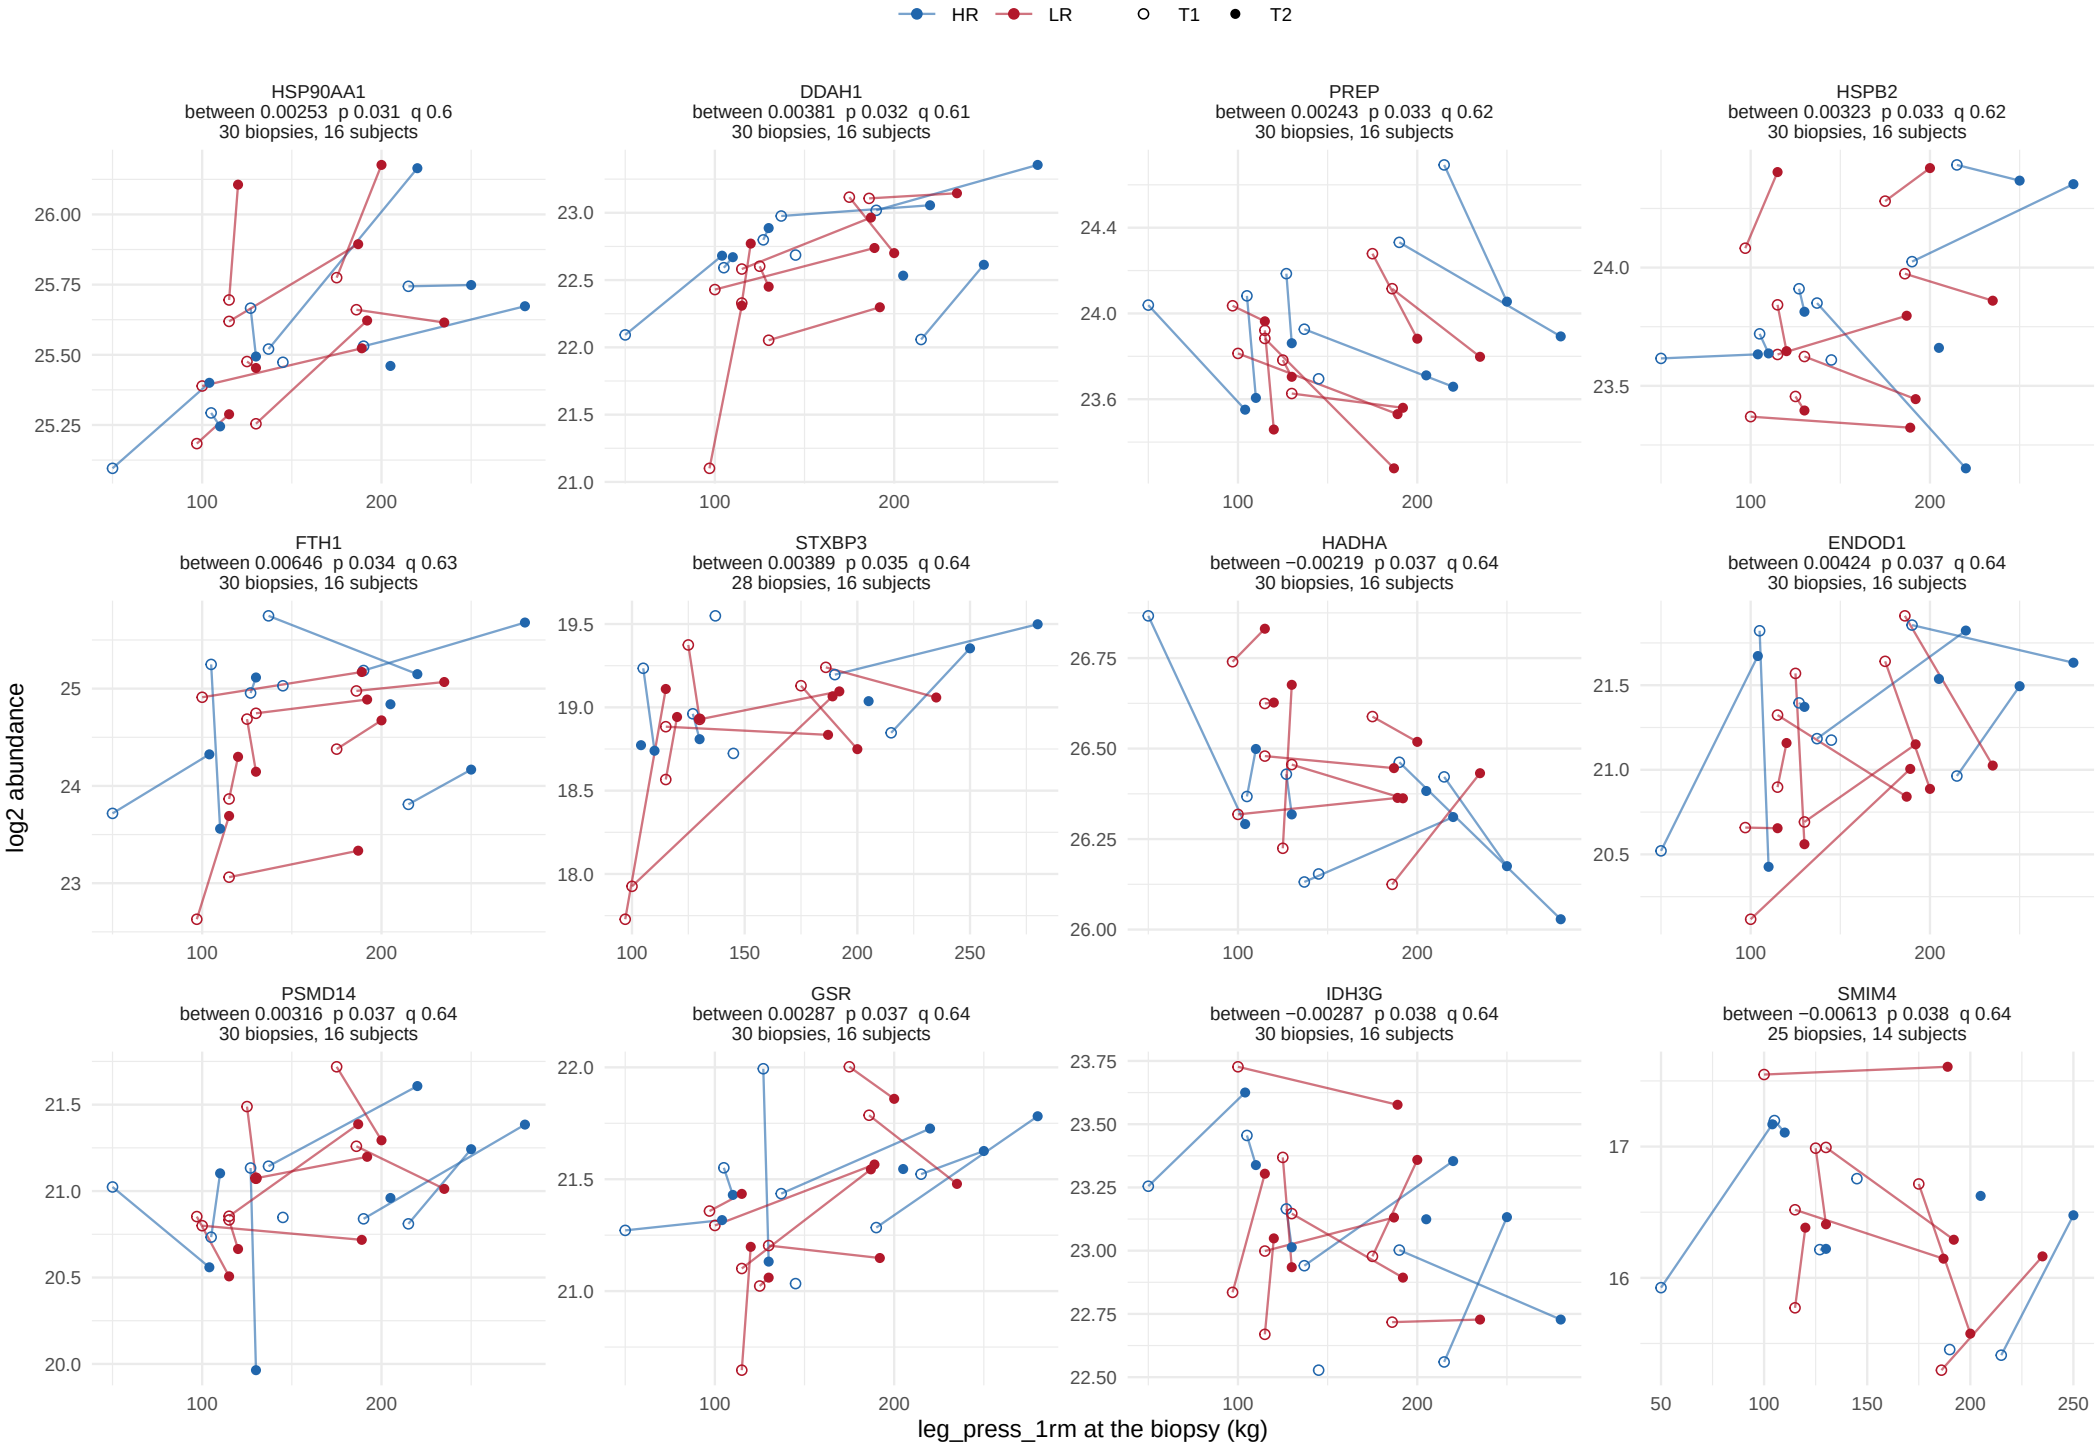

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_press_1rm, between−person term


119 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 9 of 10.

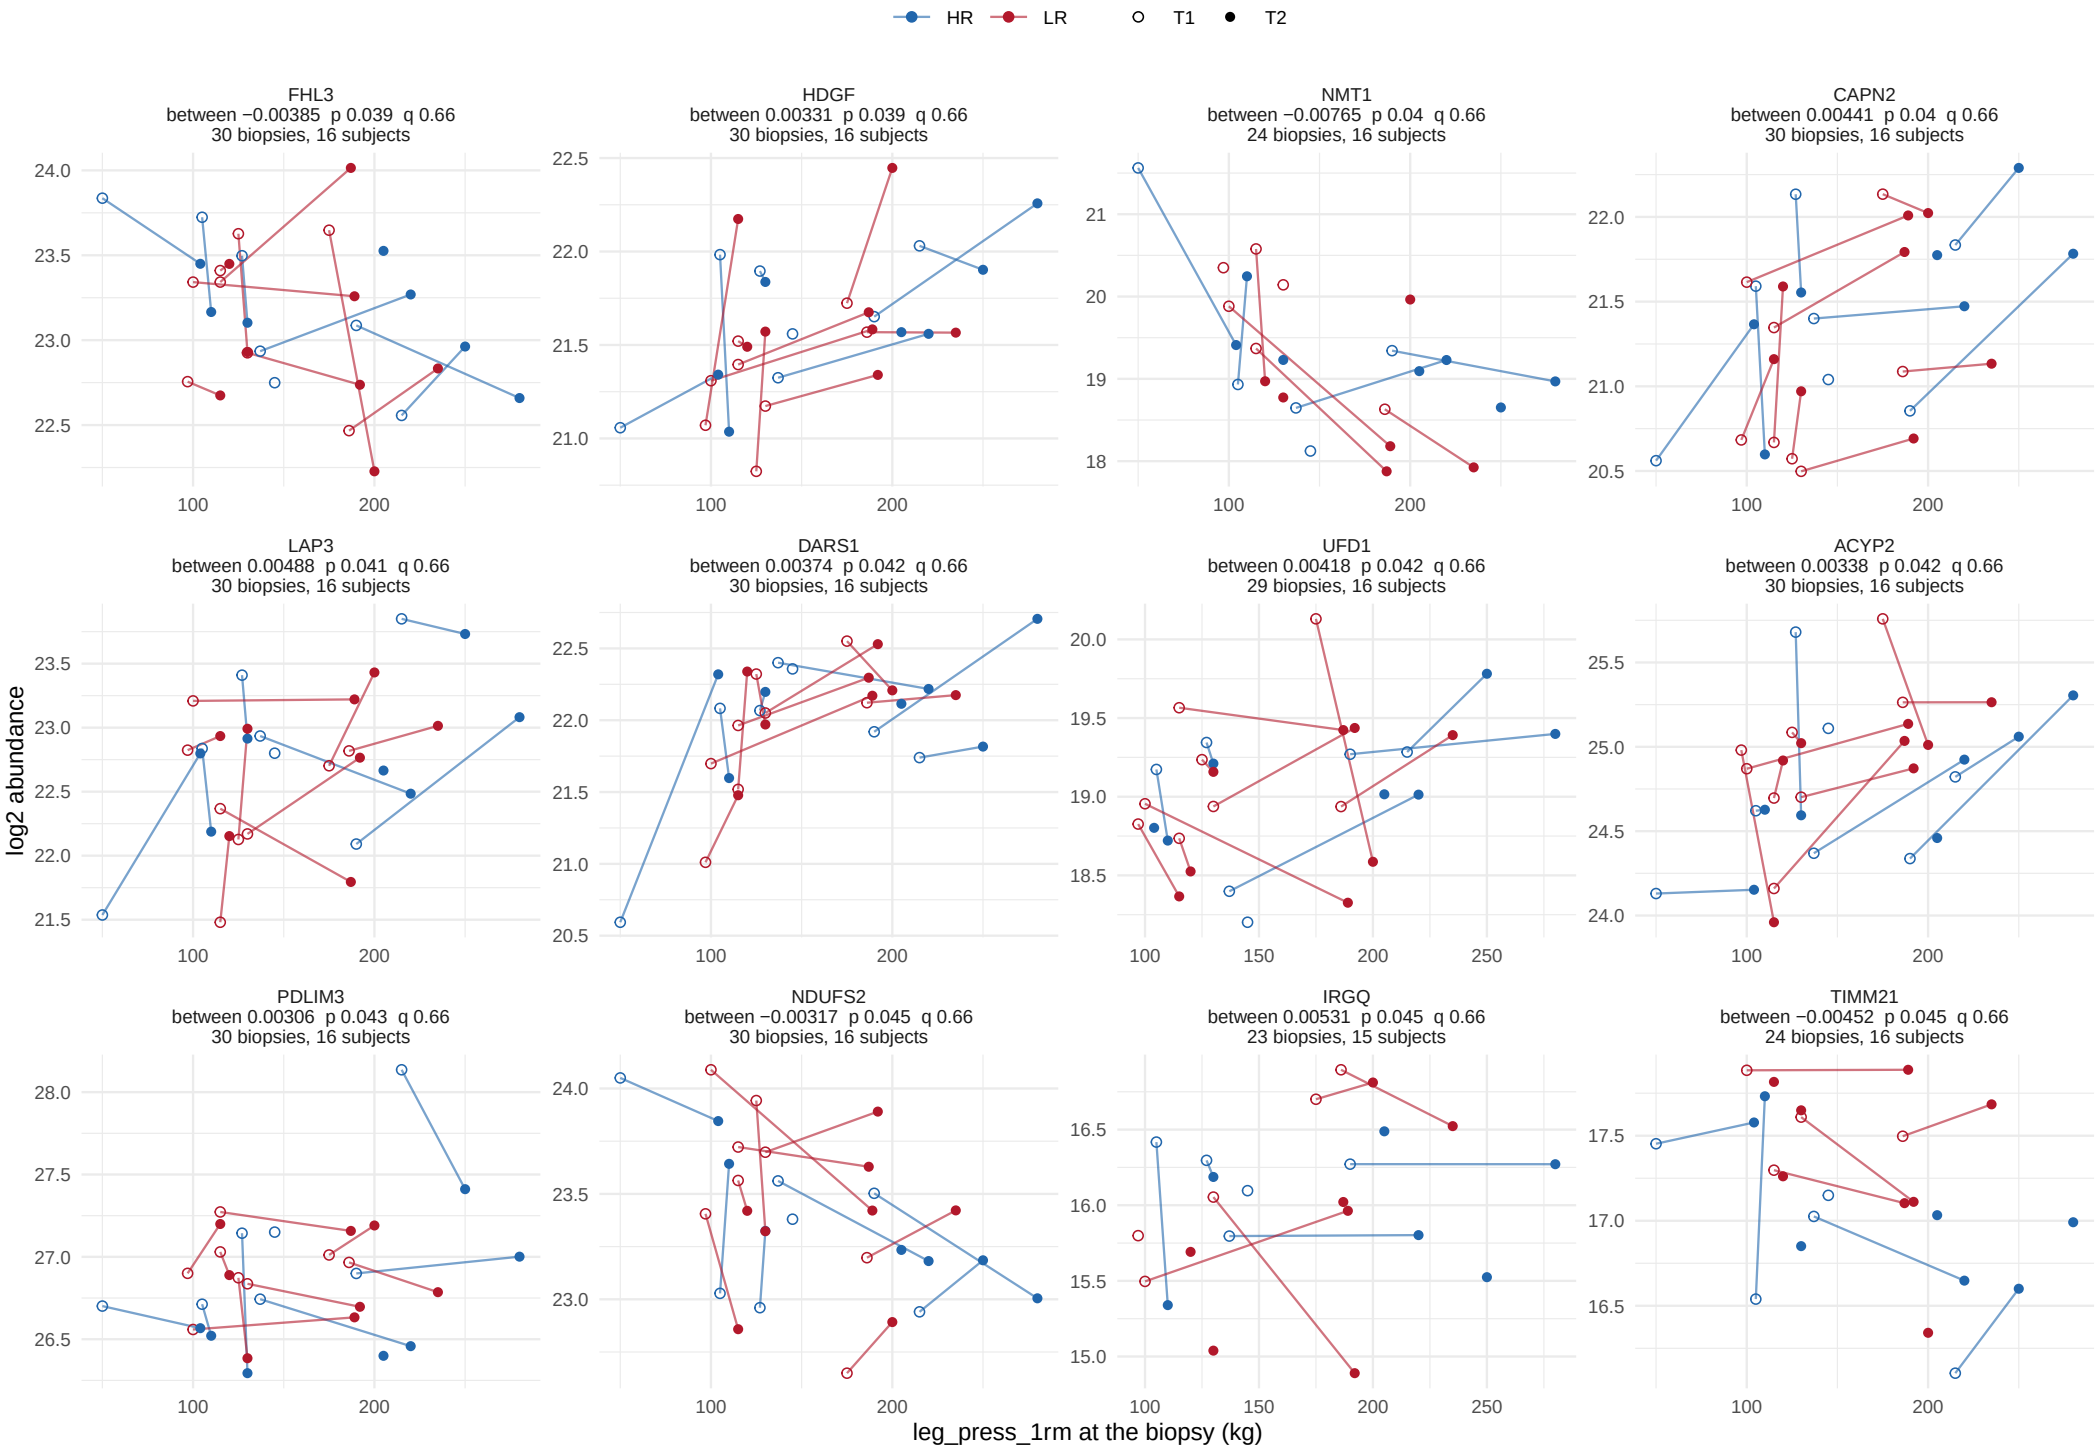

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_press_1rm, between−person term


119 of 1640 proteins at p < 0.05, 0 at BH < 0.05. Page 10 of 10.

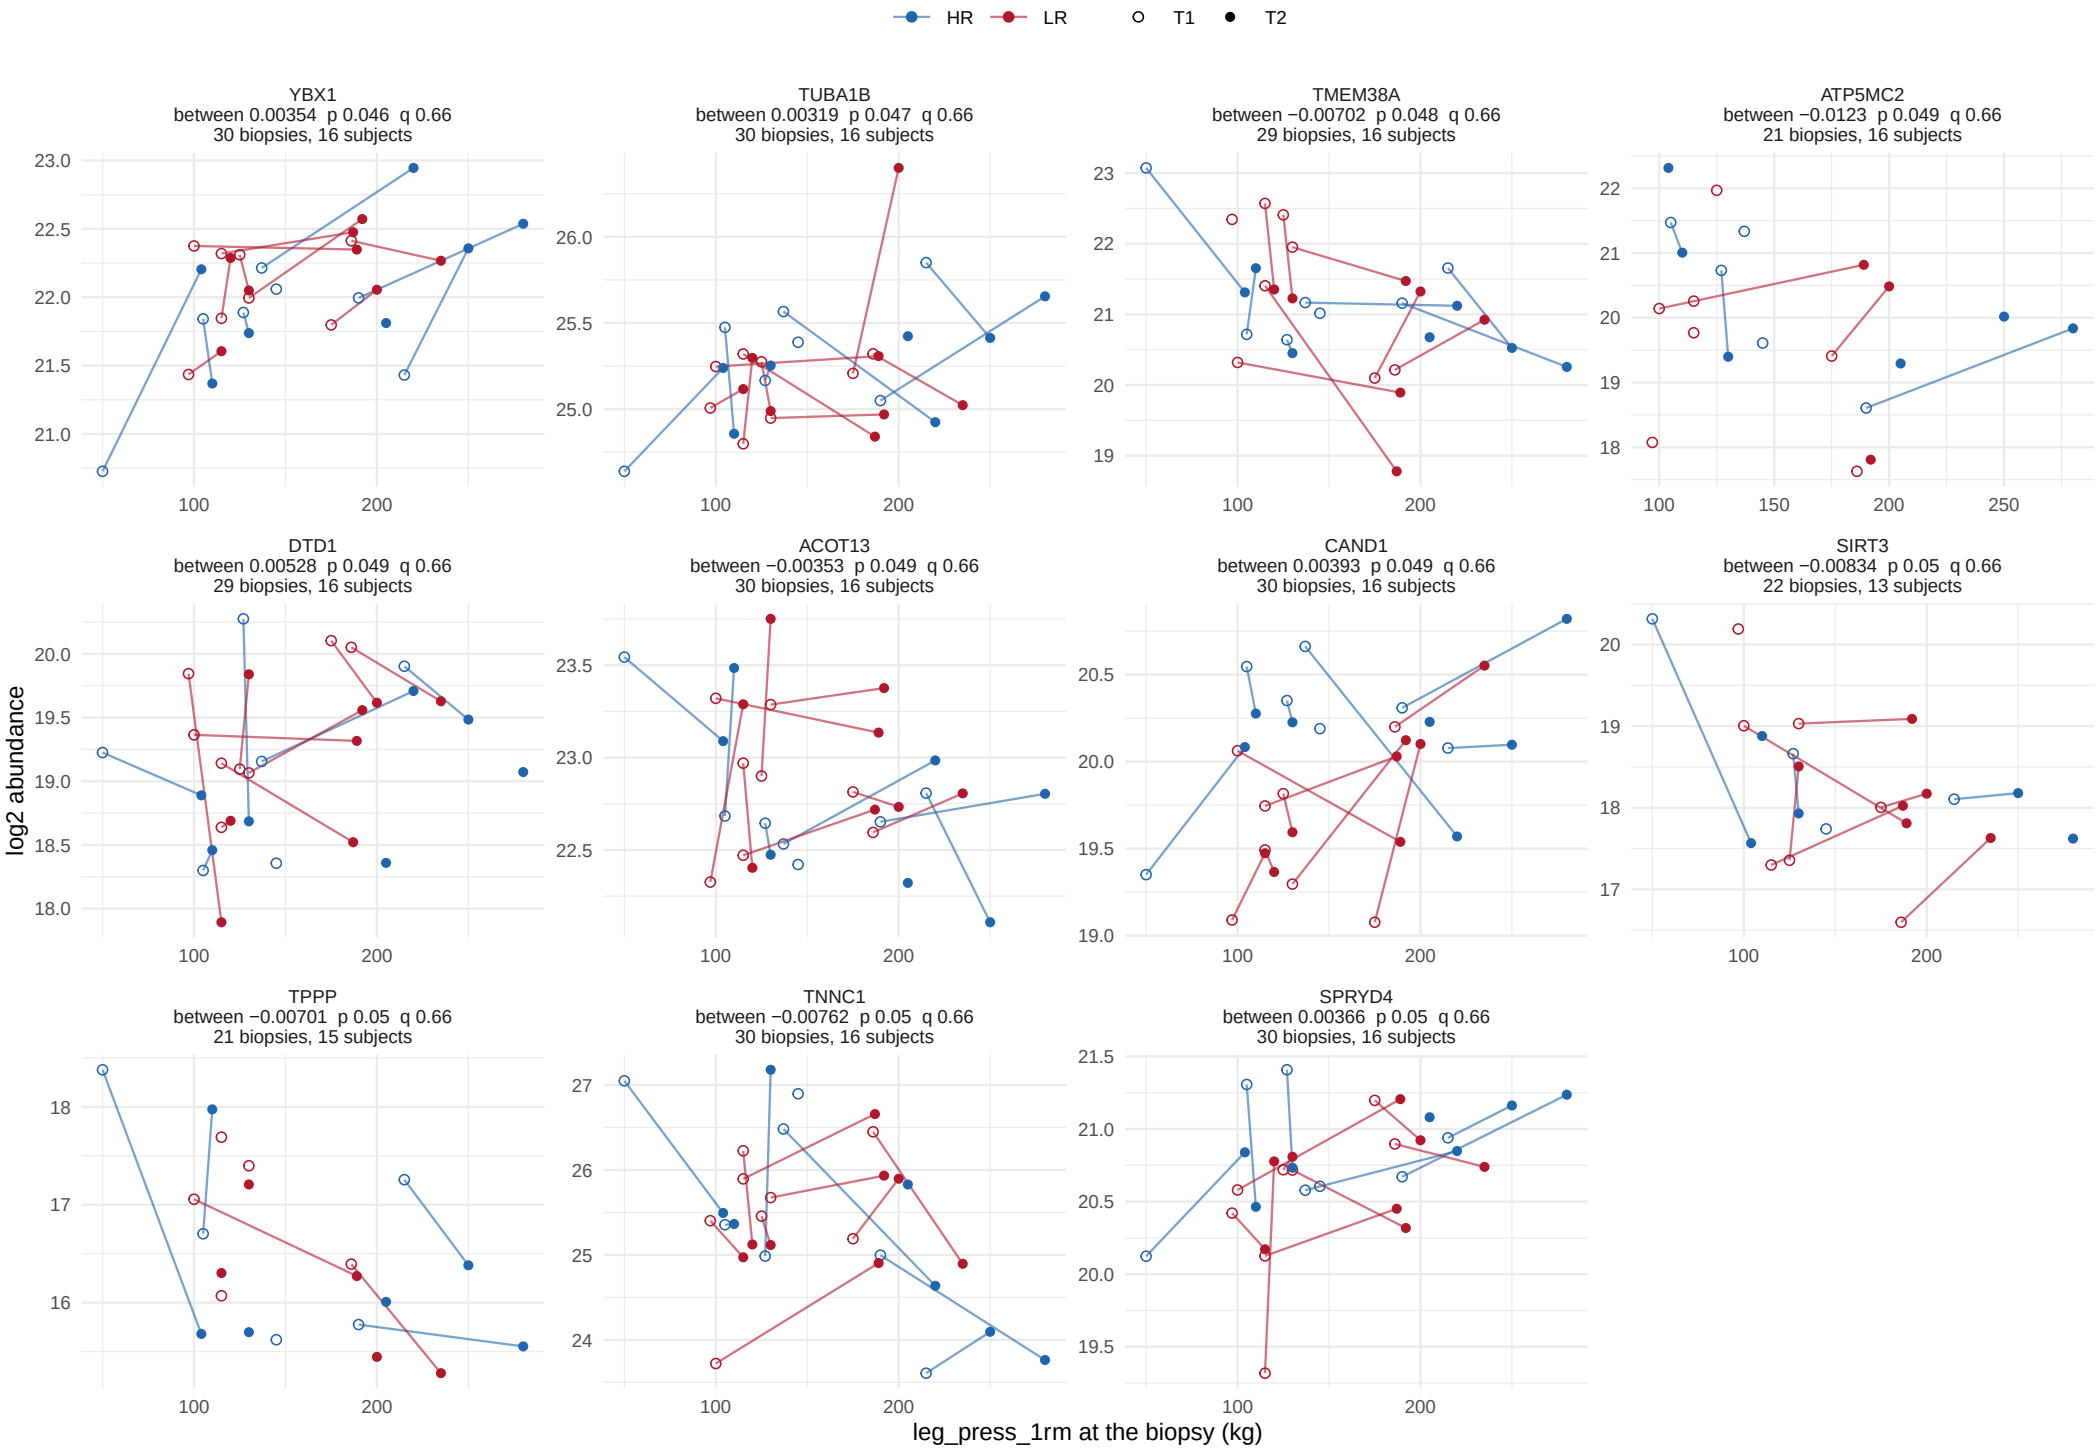

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_ext_1rm, within−person term


121 of 1615 proteins at p < 0.05, 0 at BH < 0.05. Page 1 of 11.

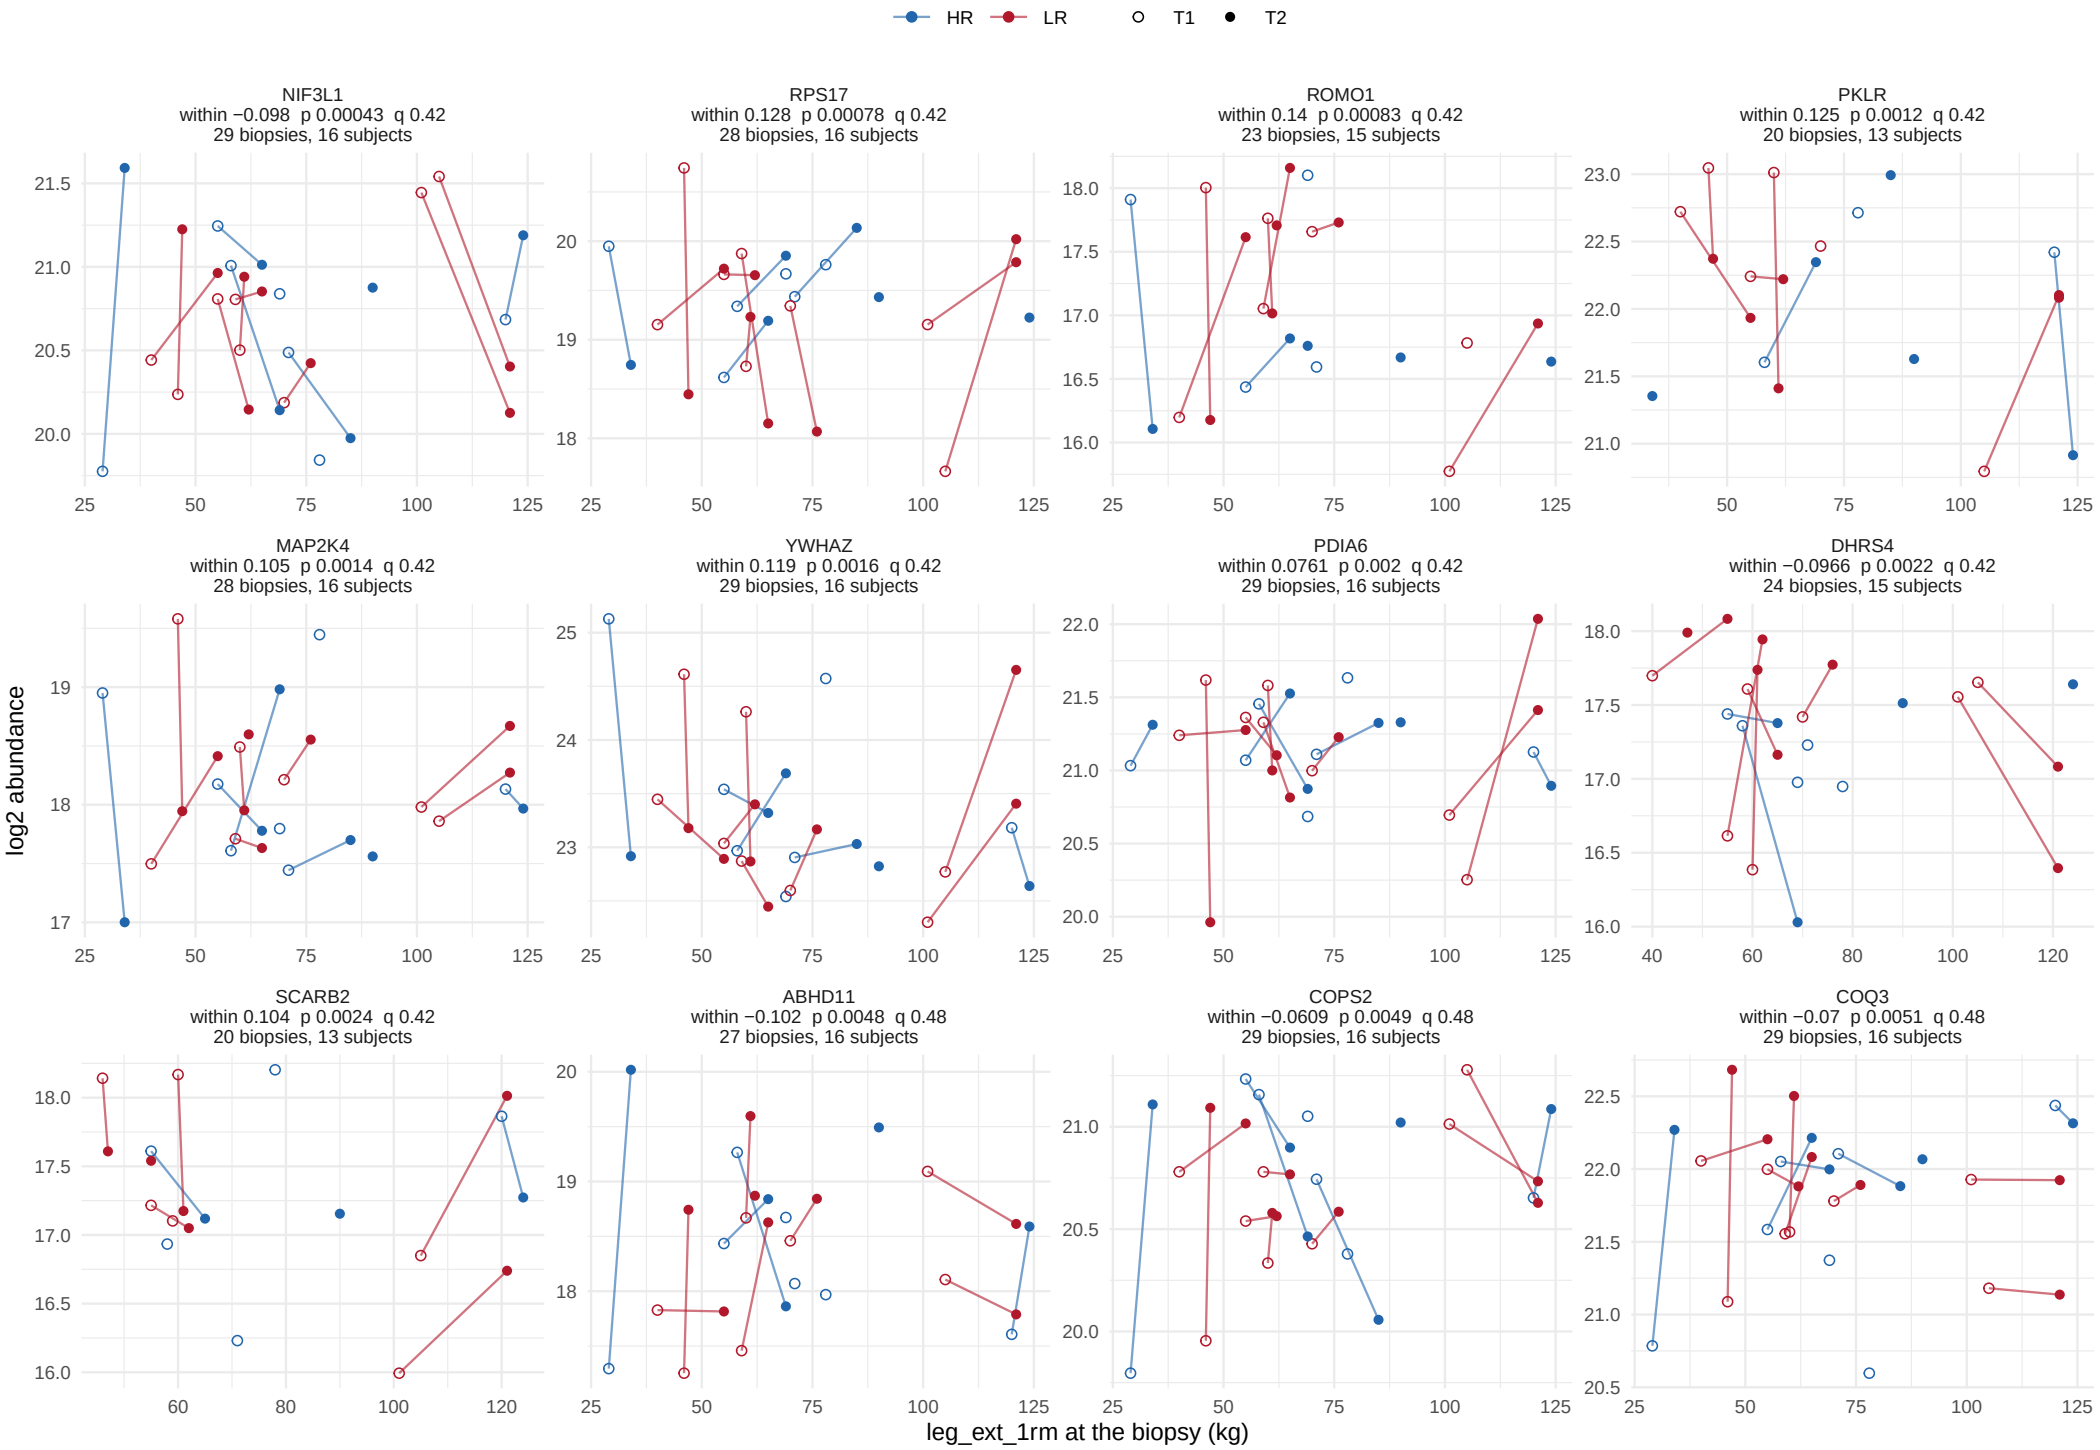

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_ext_1rm, within−person term


121 of 1615 proteins at p < 0.05, 0 at BH < 0.05. Page 2 of 11.

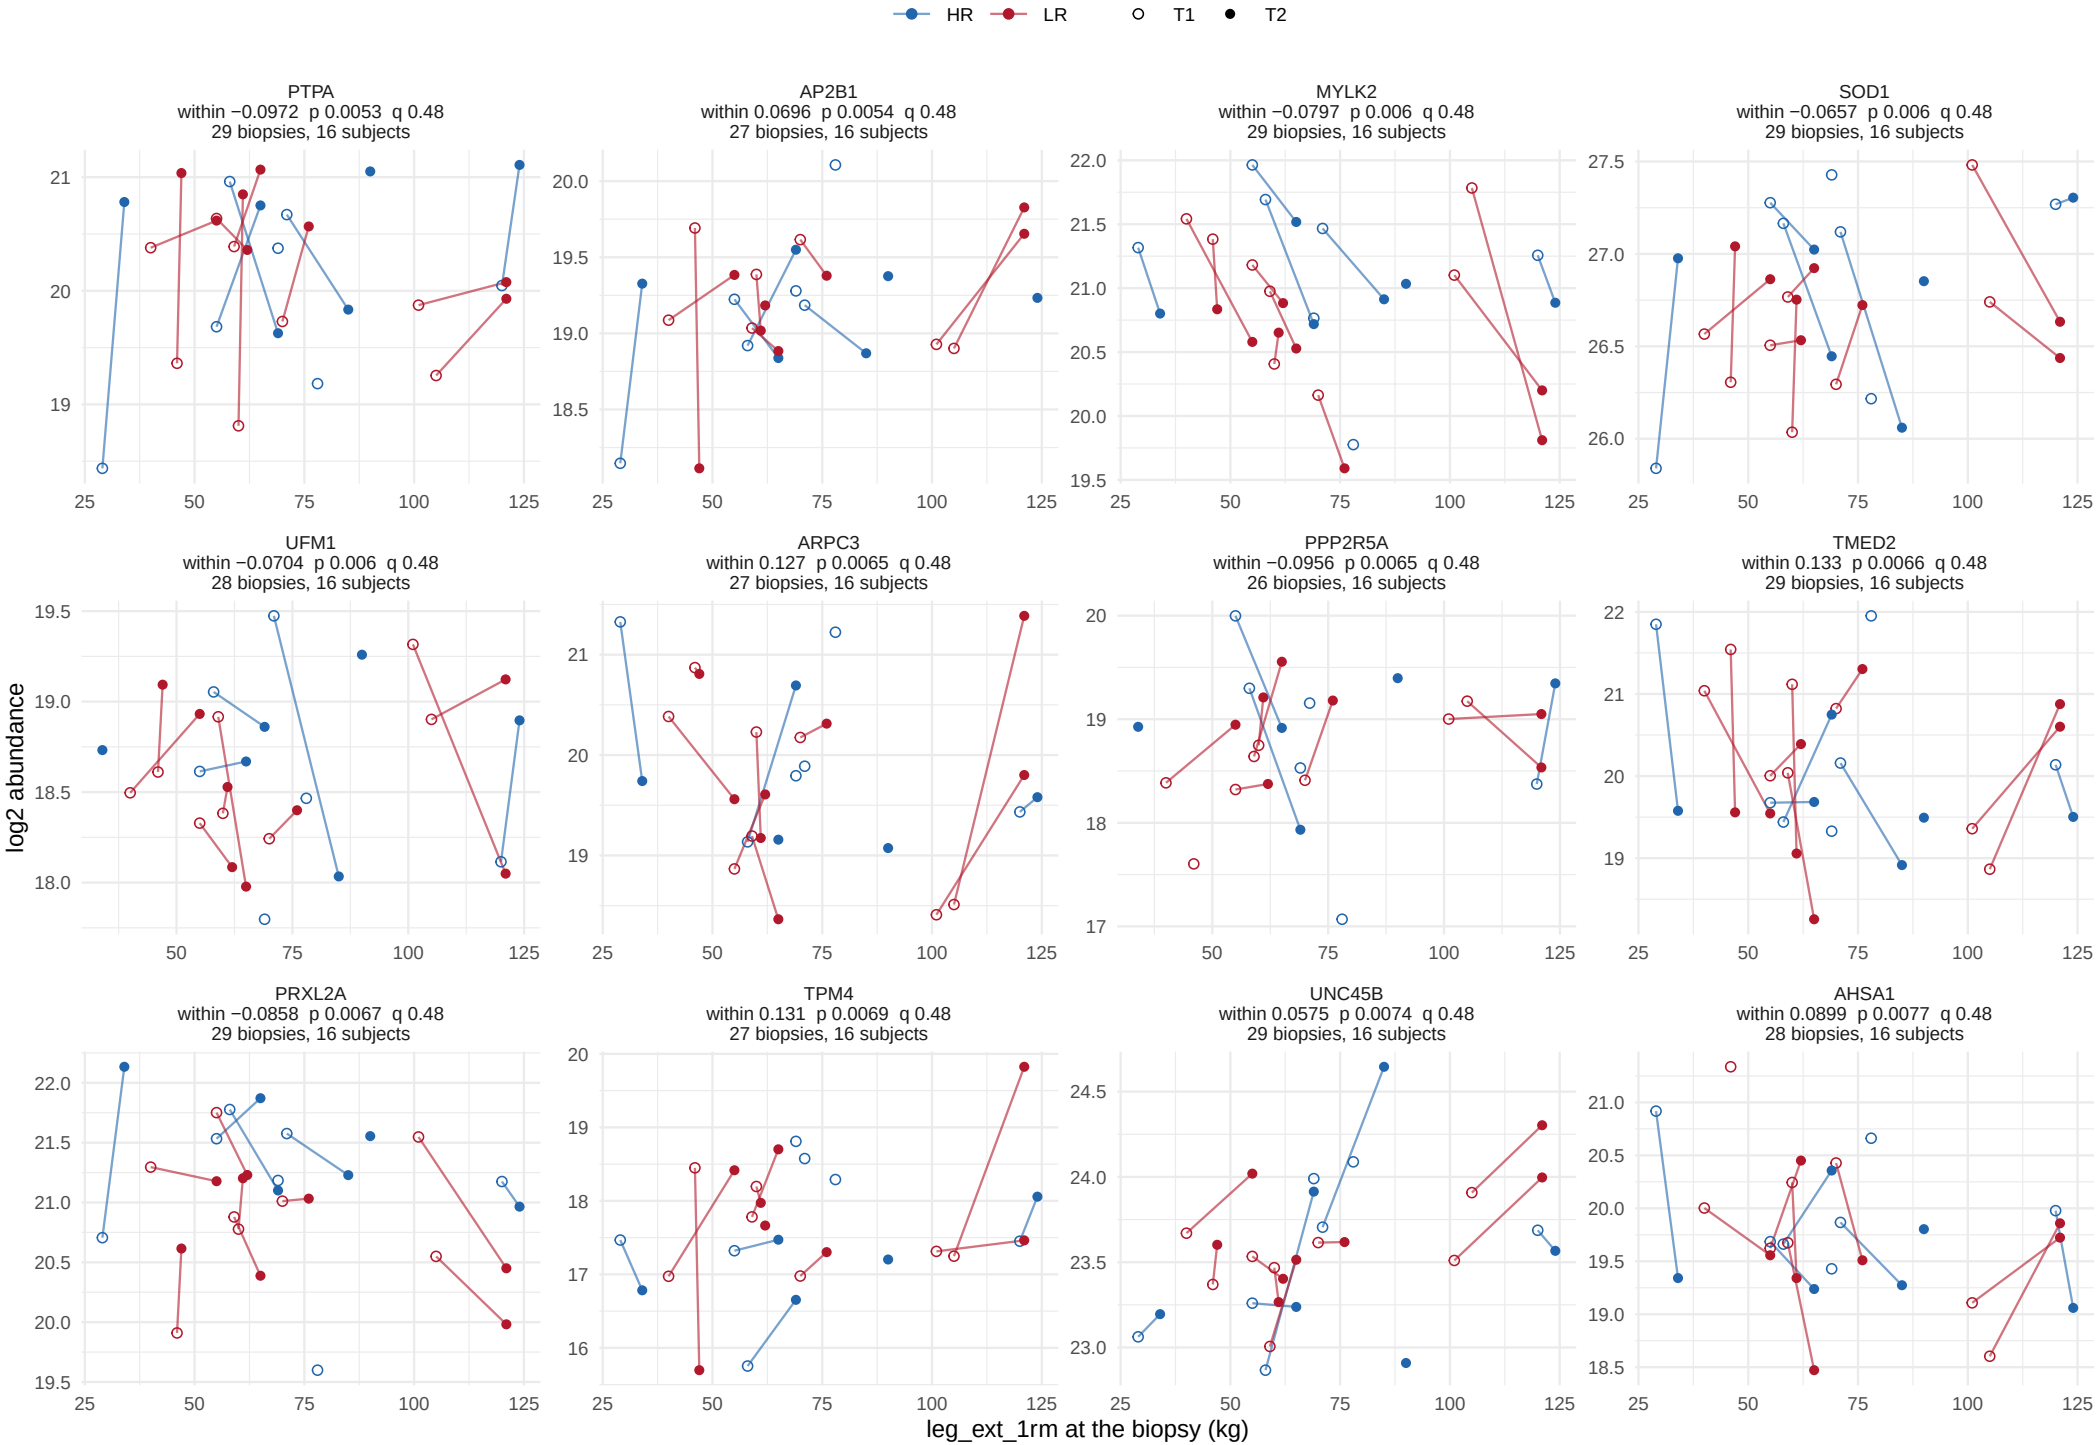

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_ext_1rm, within−person term


121 of 1615 proteins at p < 0.05, 0 at BH < 0.05. Page 3 of 11.

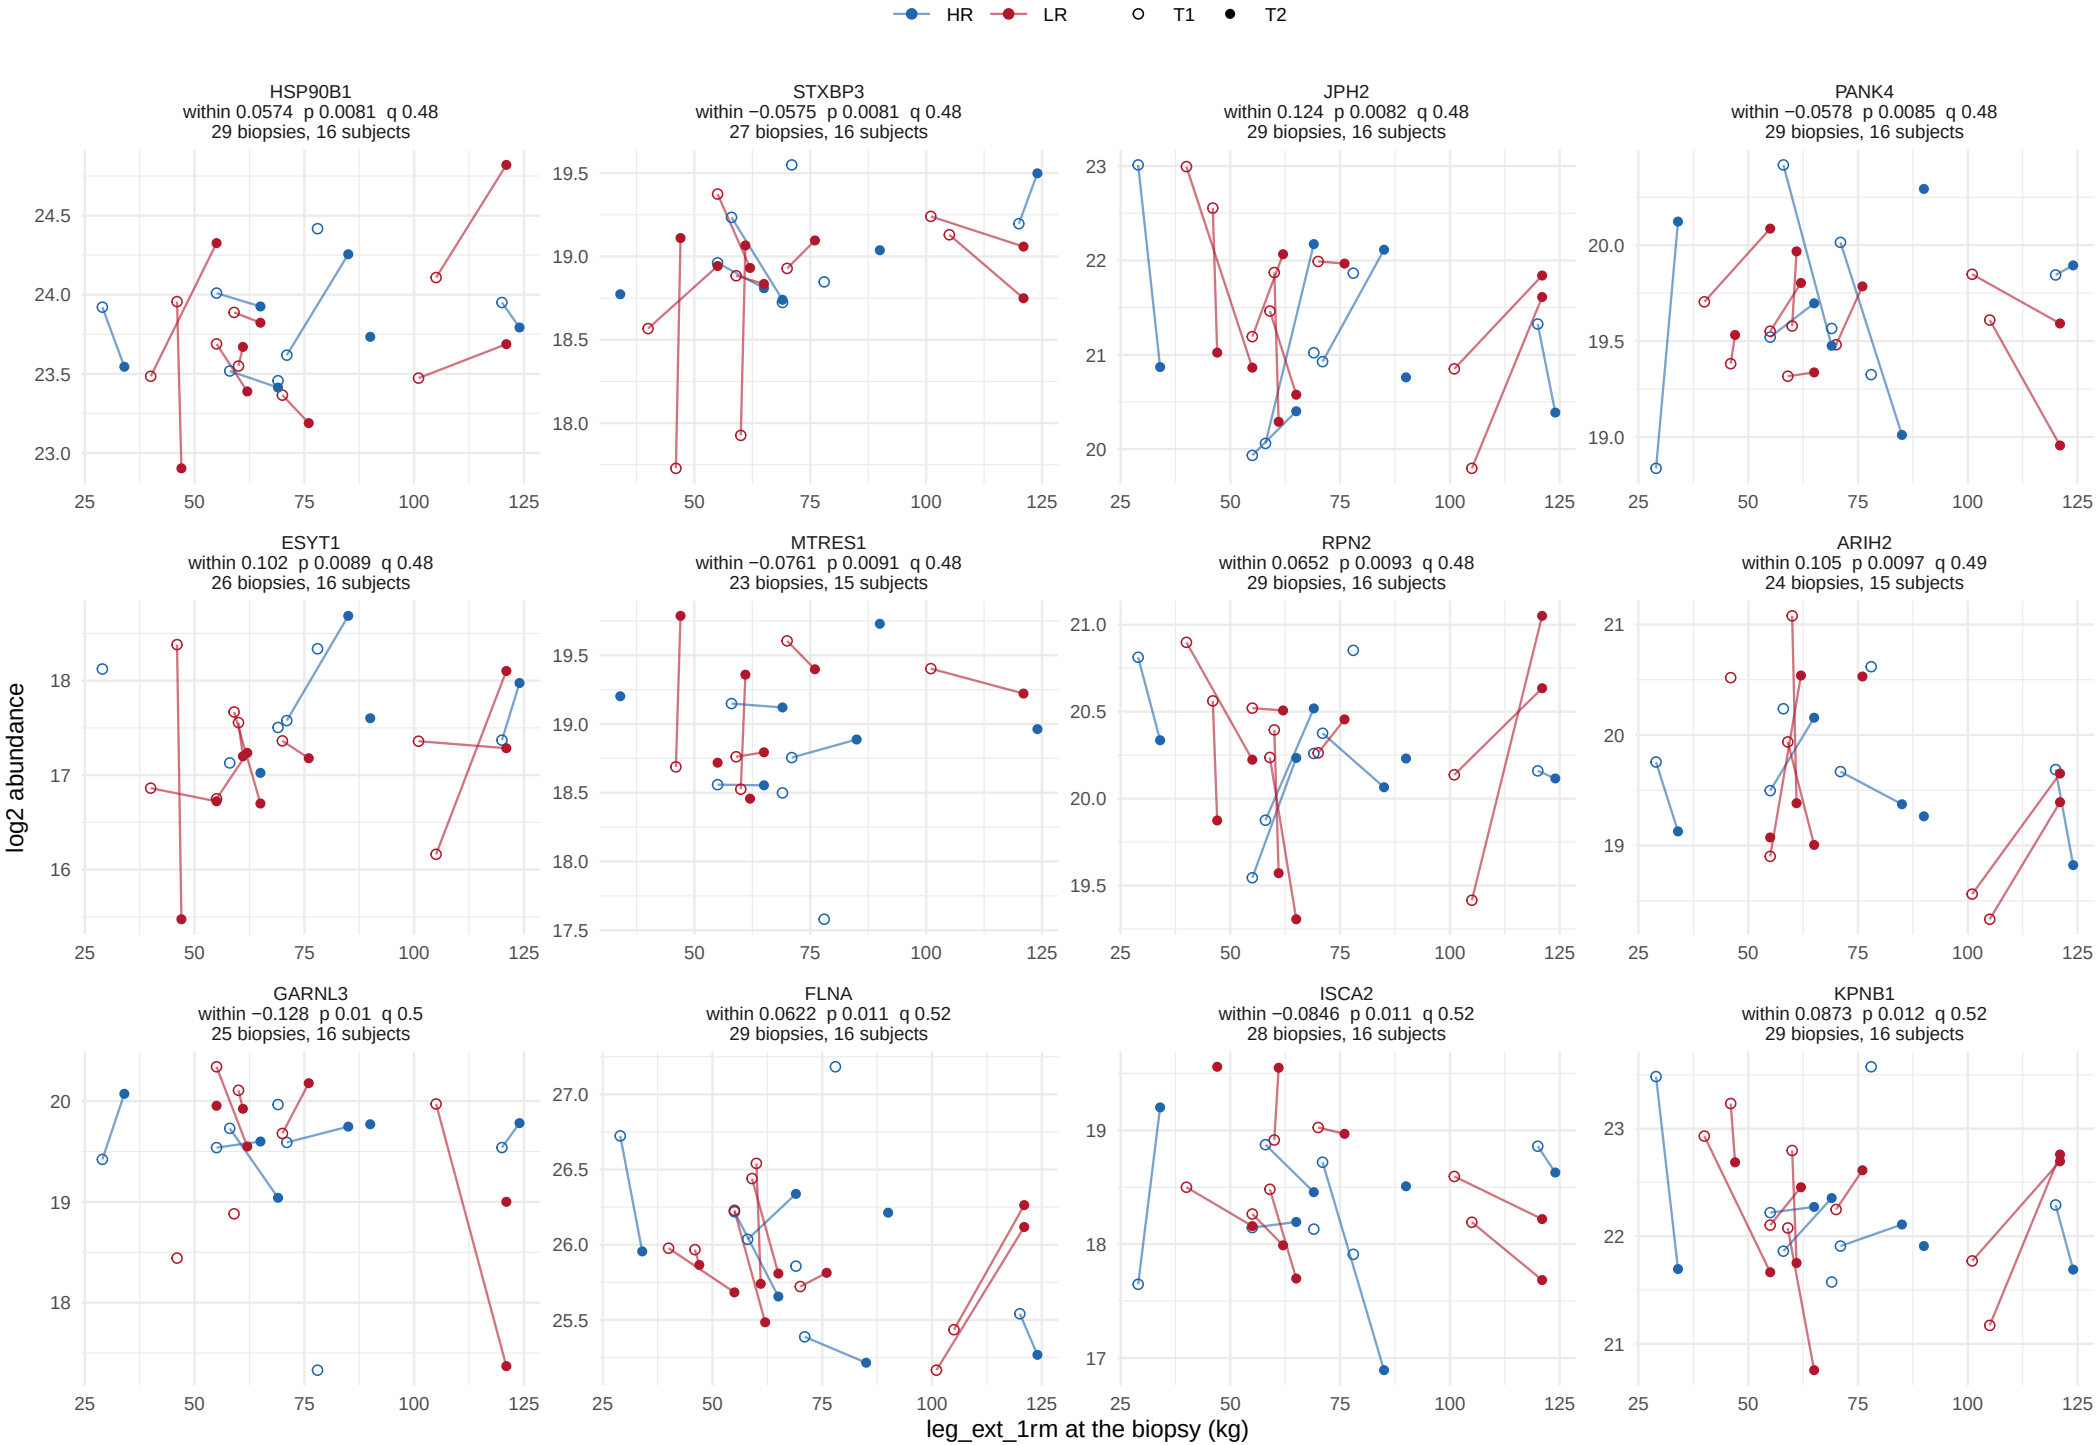

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_ext_1rm, within−person term


121 of 1615 proteins at p < 0.05, 0 at BH < 0.05. Page 4 of 11.

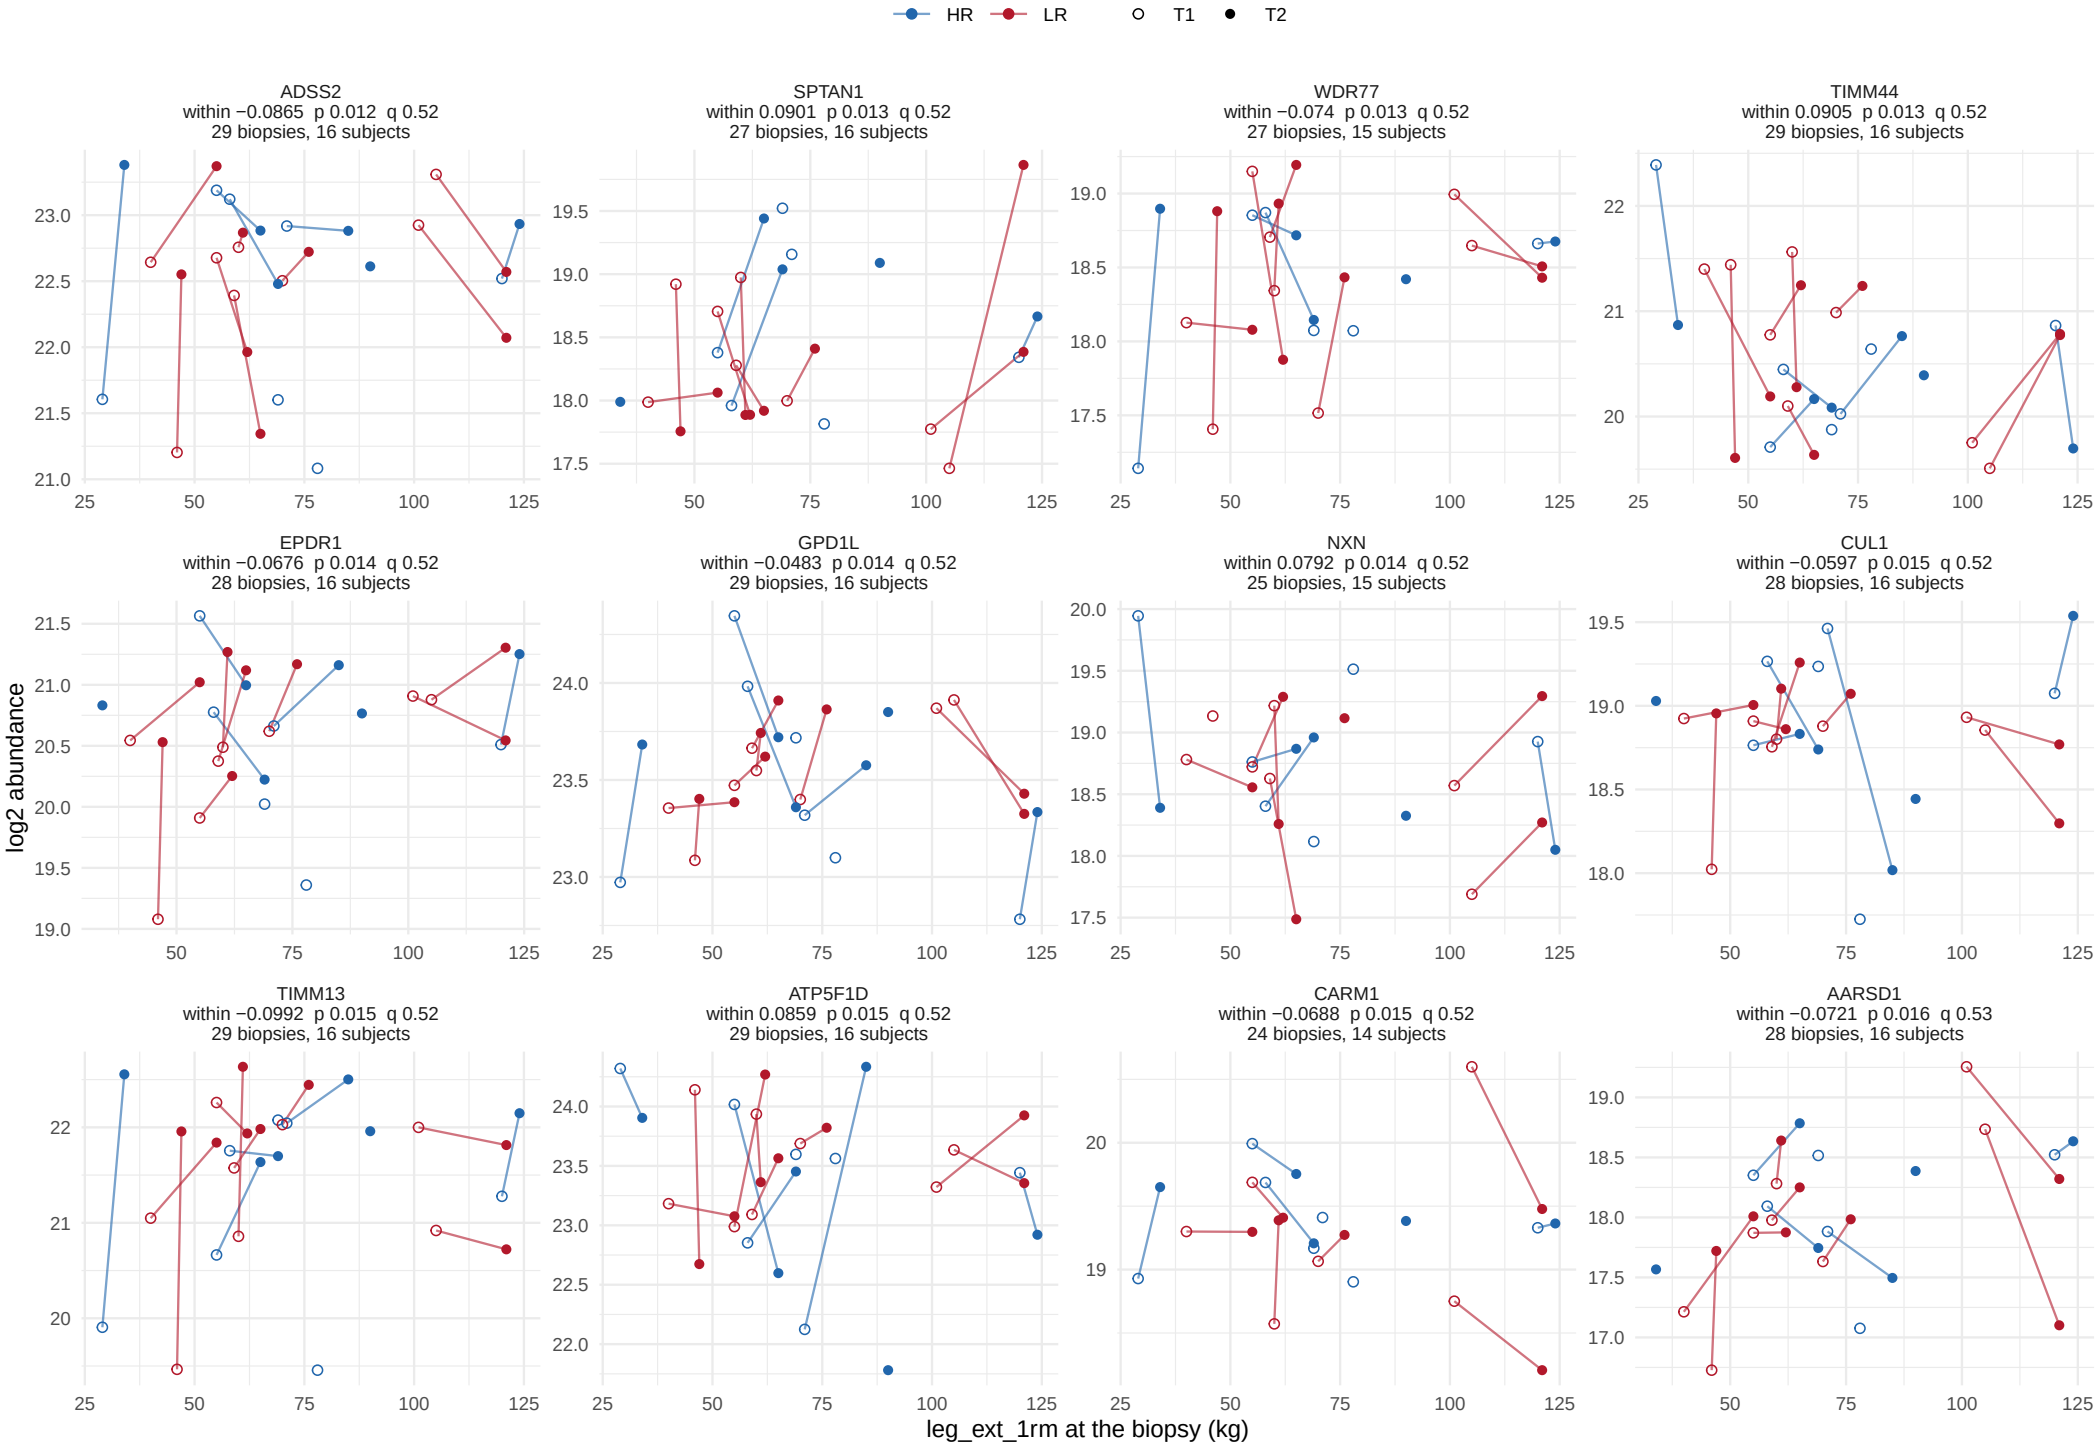

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_ext_1rm, within−person term


121 of 1615 proteins at p < 0.05, 0 at BH < 0.05. Page 5 of 11.

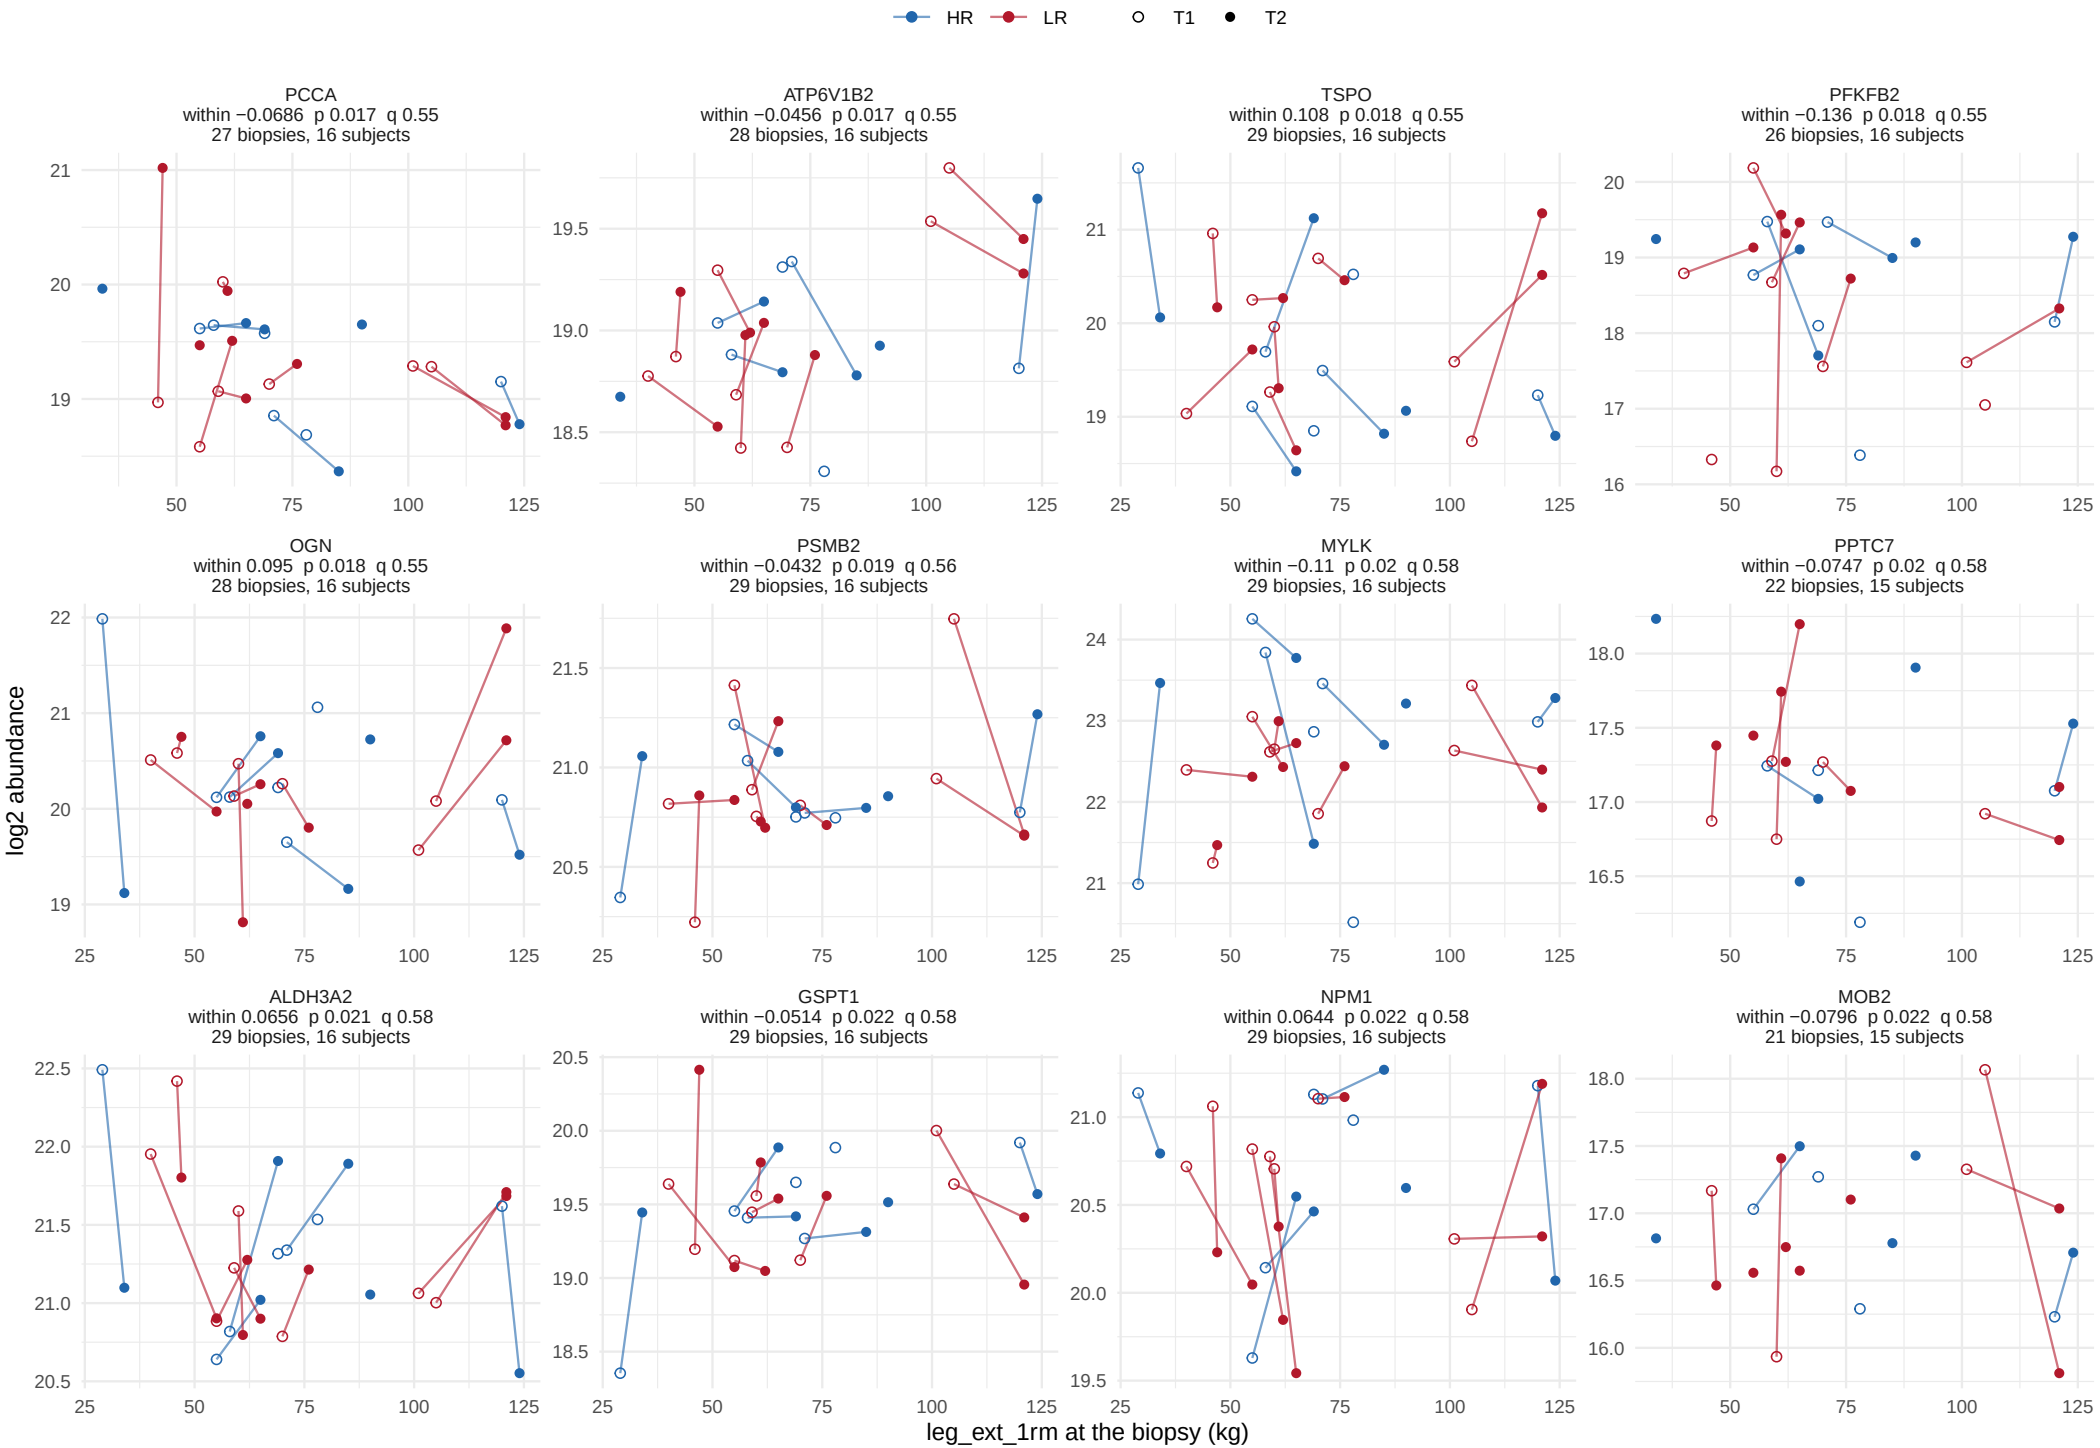

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_ext_1rm, within−person term


121 of 1615 proteins at p < 0.05, 0 at BH < 0.05. Page 6 of 11.

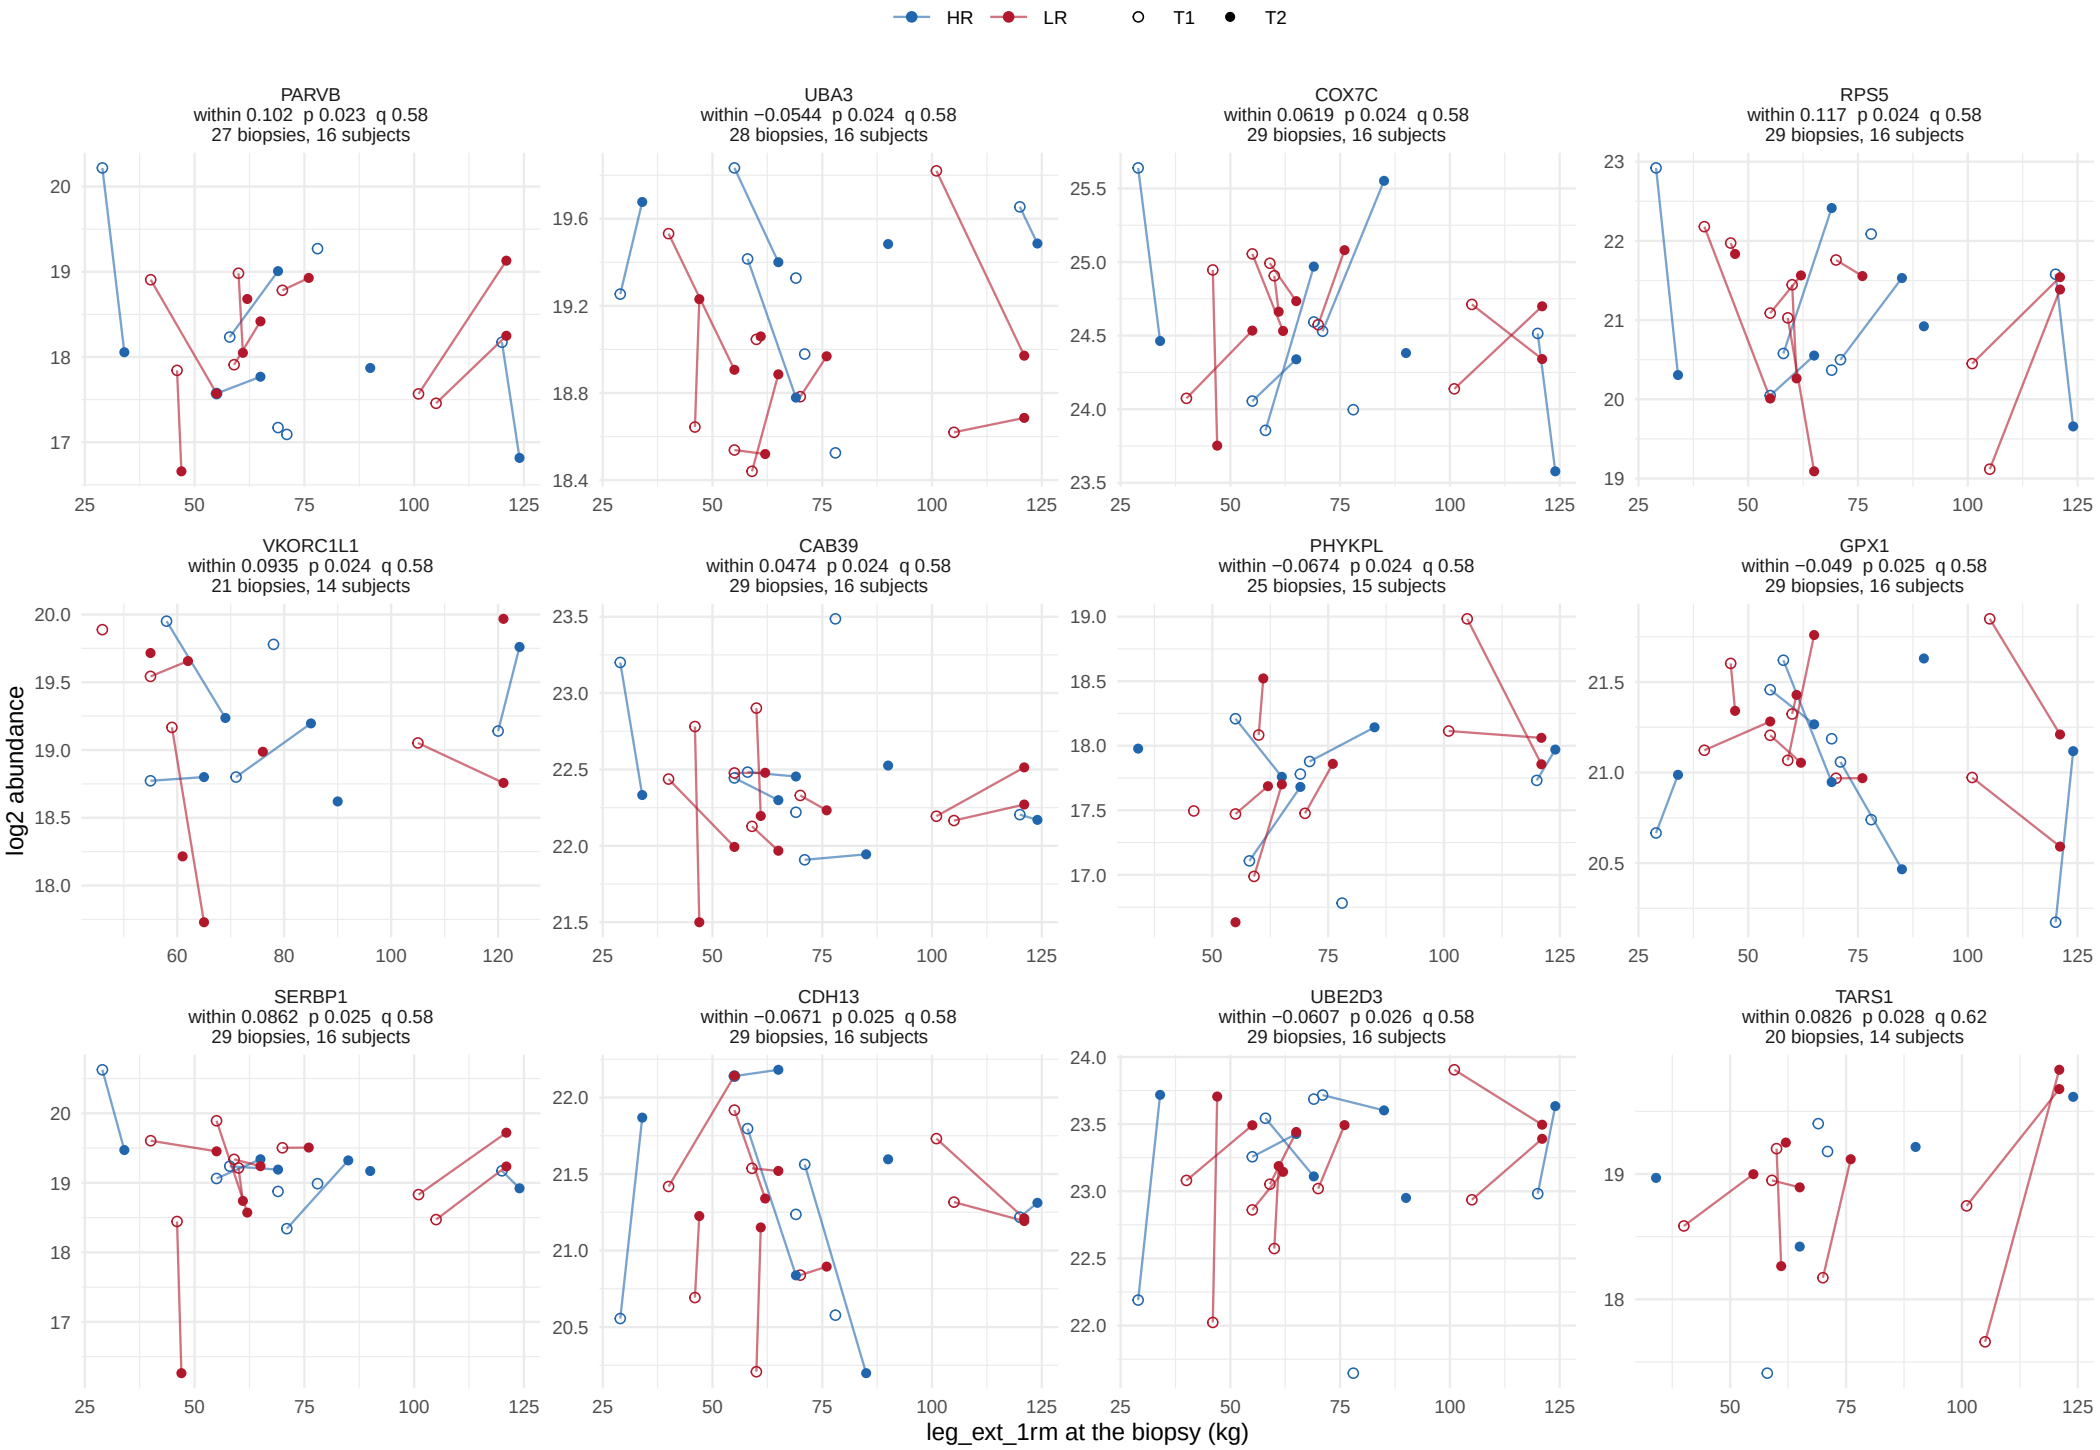

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_ext_1rm, within−person term


121 of 1615 proteins at p < 0.05, 0 at BH < 0.05. Page 7 of 11.

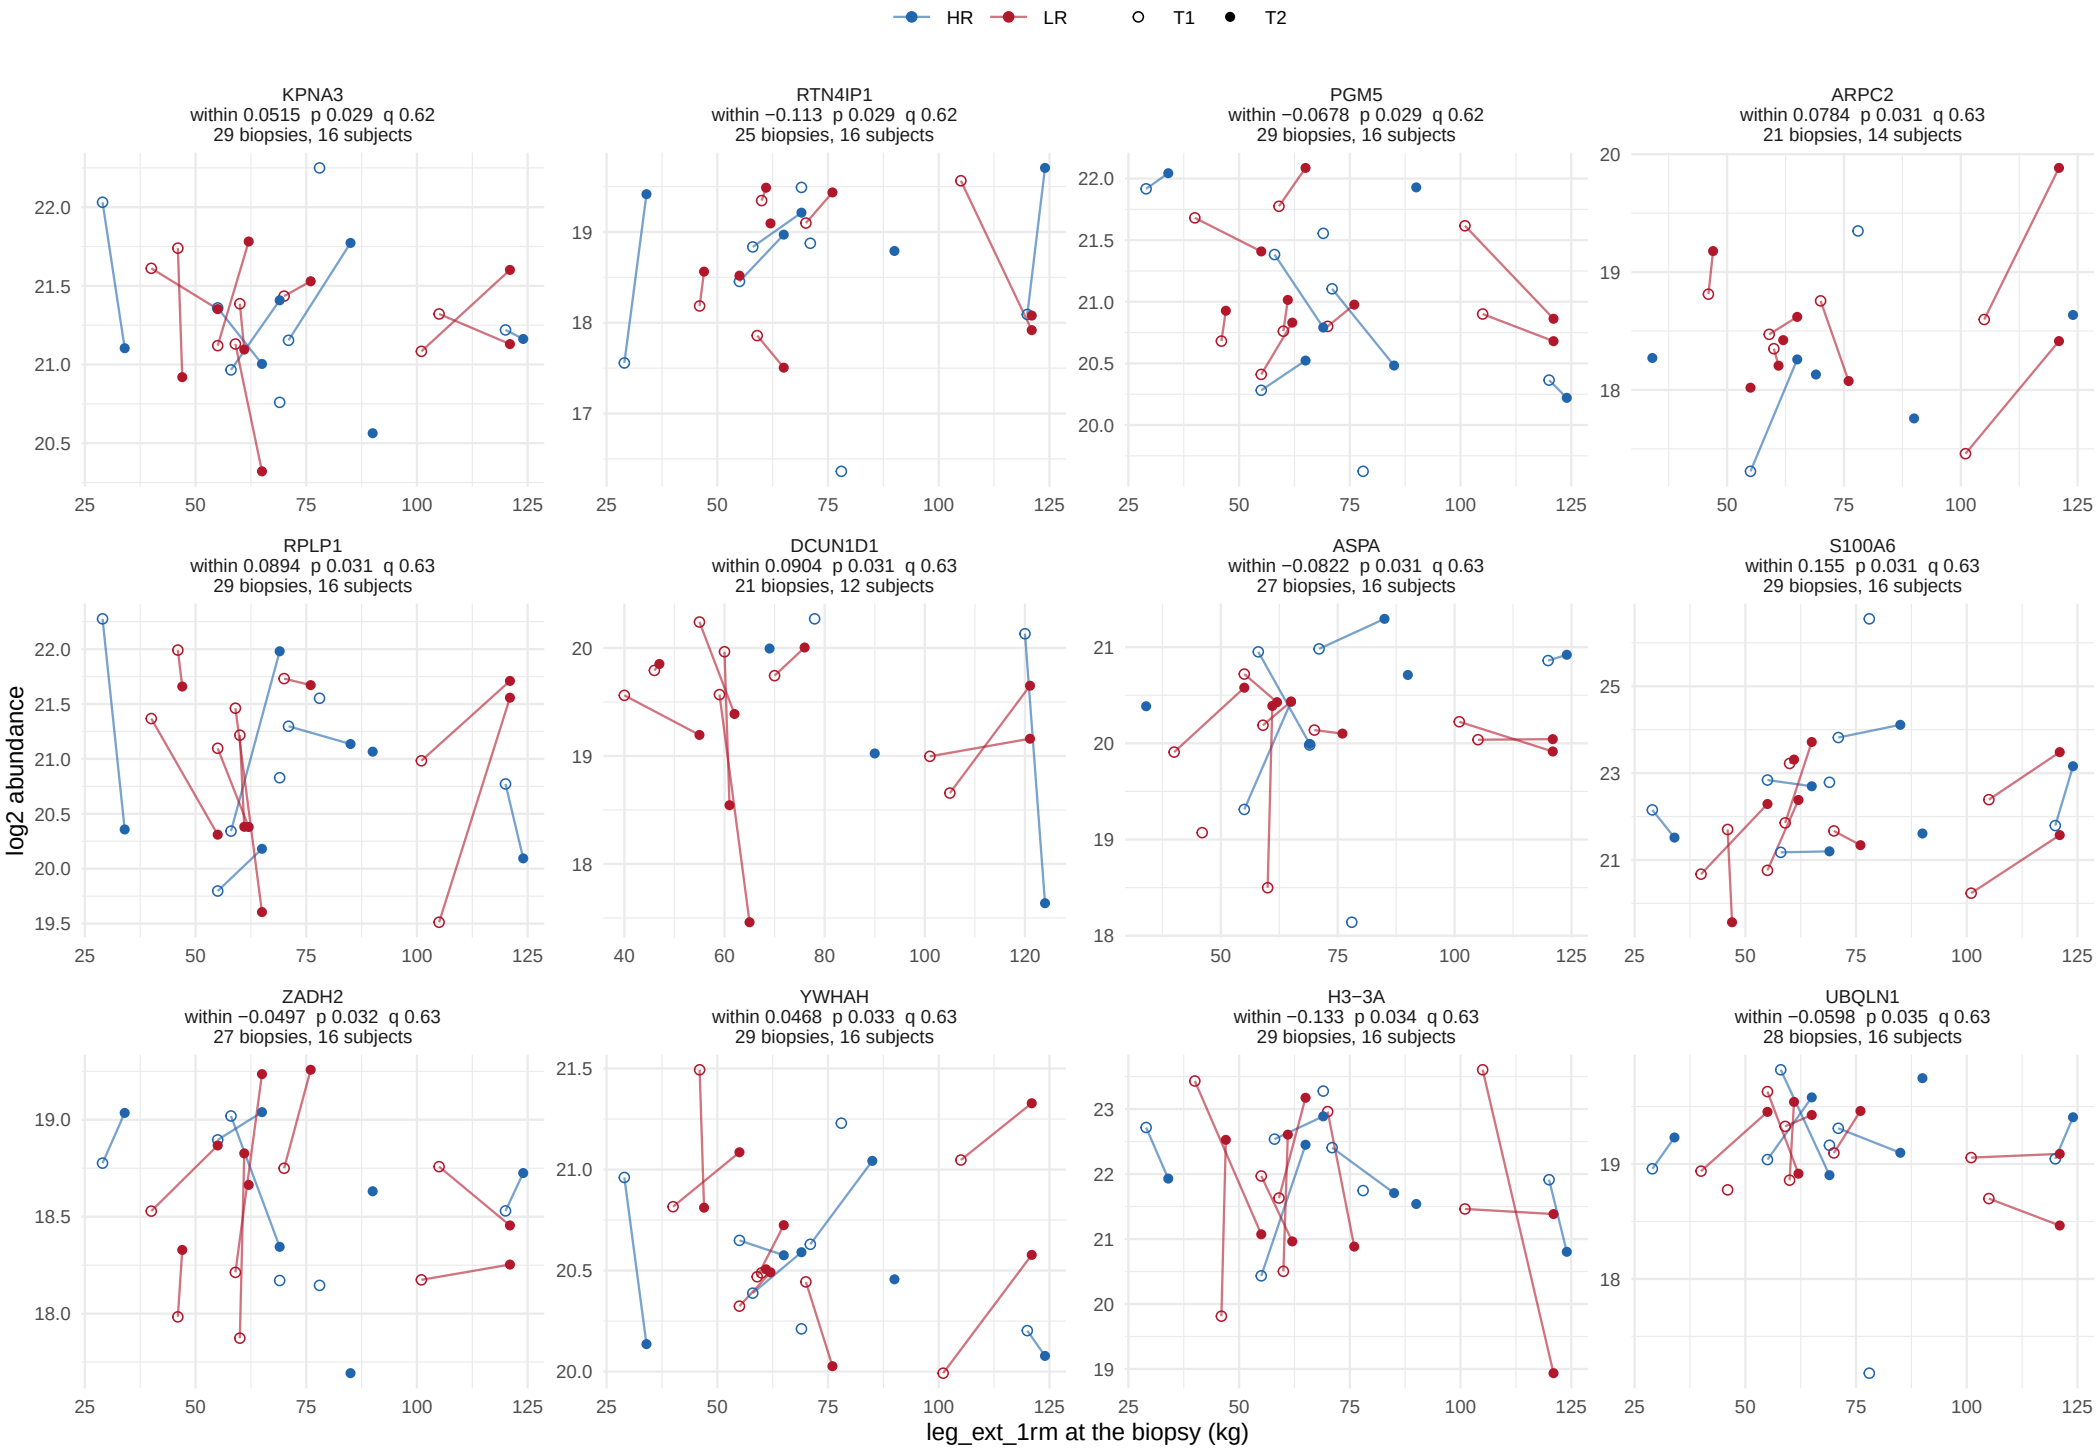

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_ext_1rm, within−person term


121 of 1615 proteins at p < 0.05, 0 at BH < 0.05. Page 8 of 11.

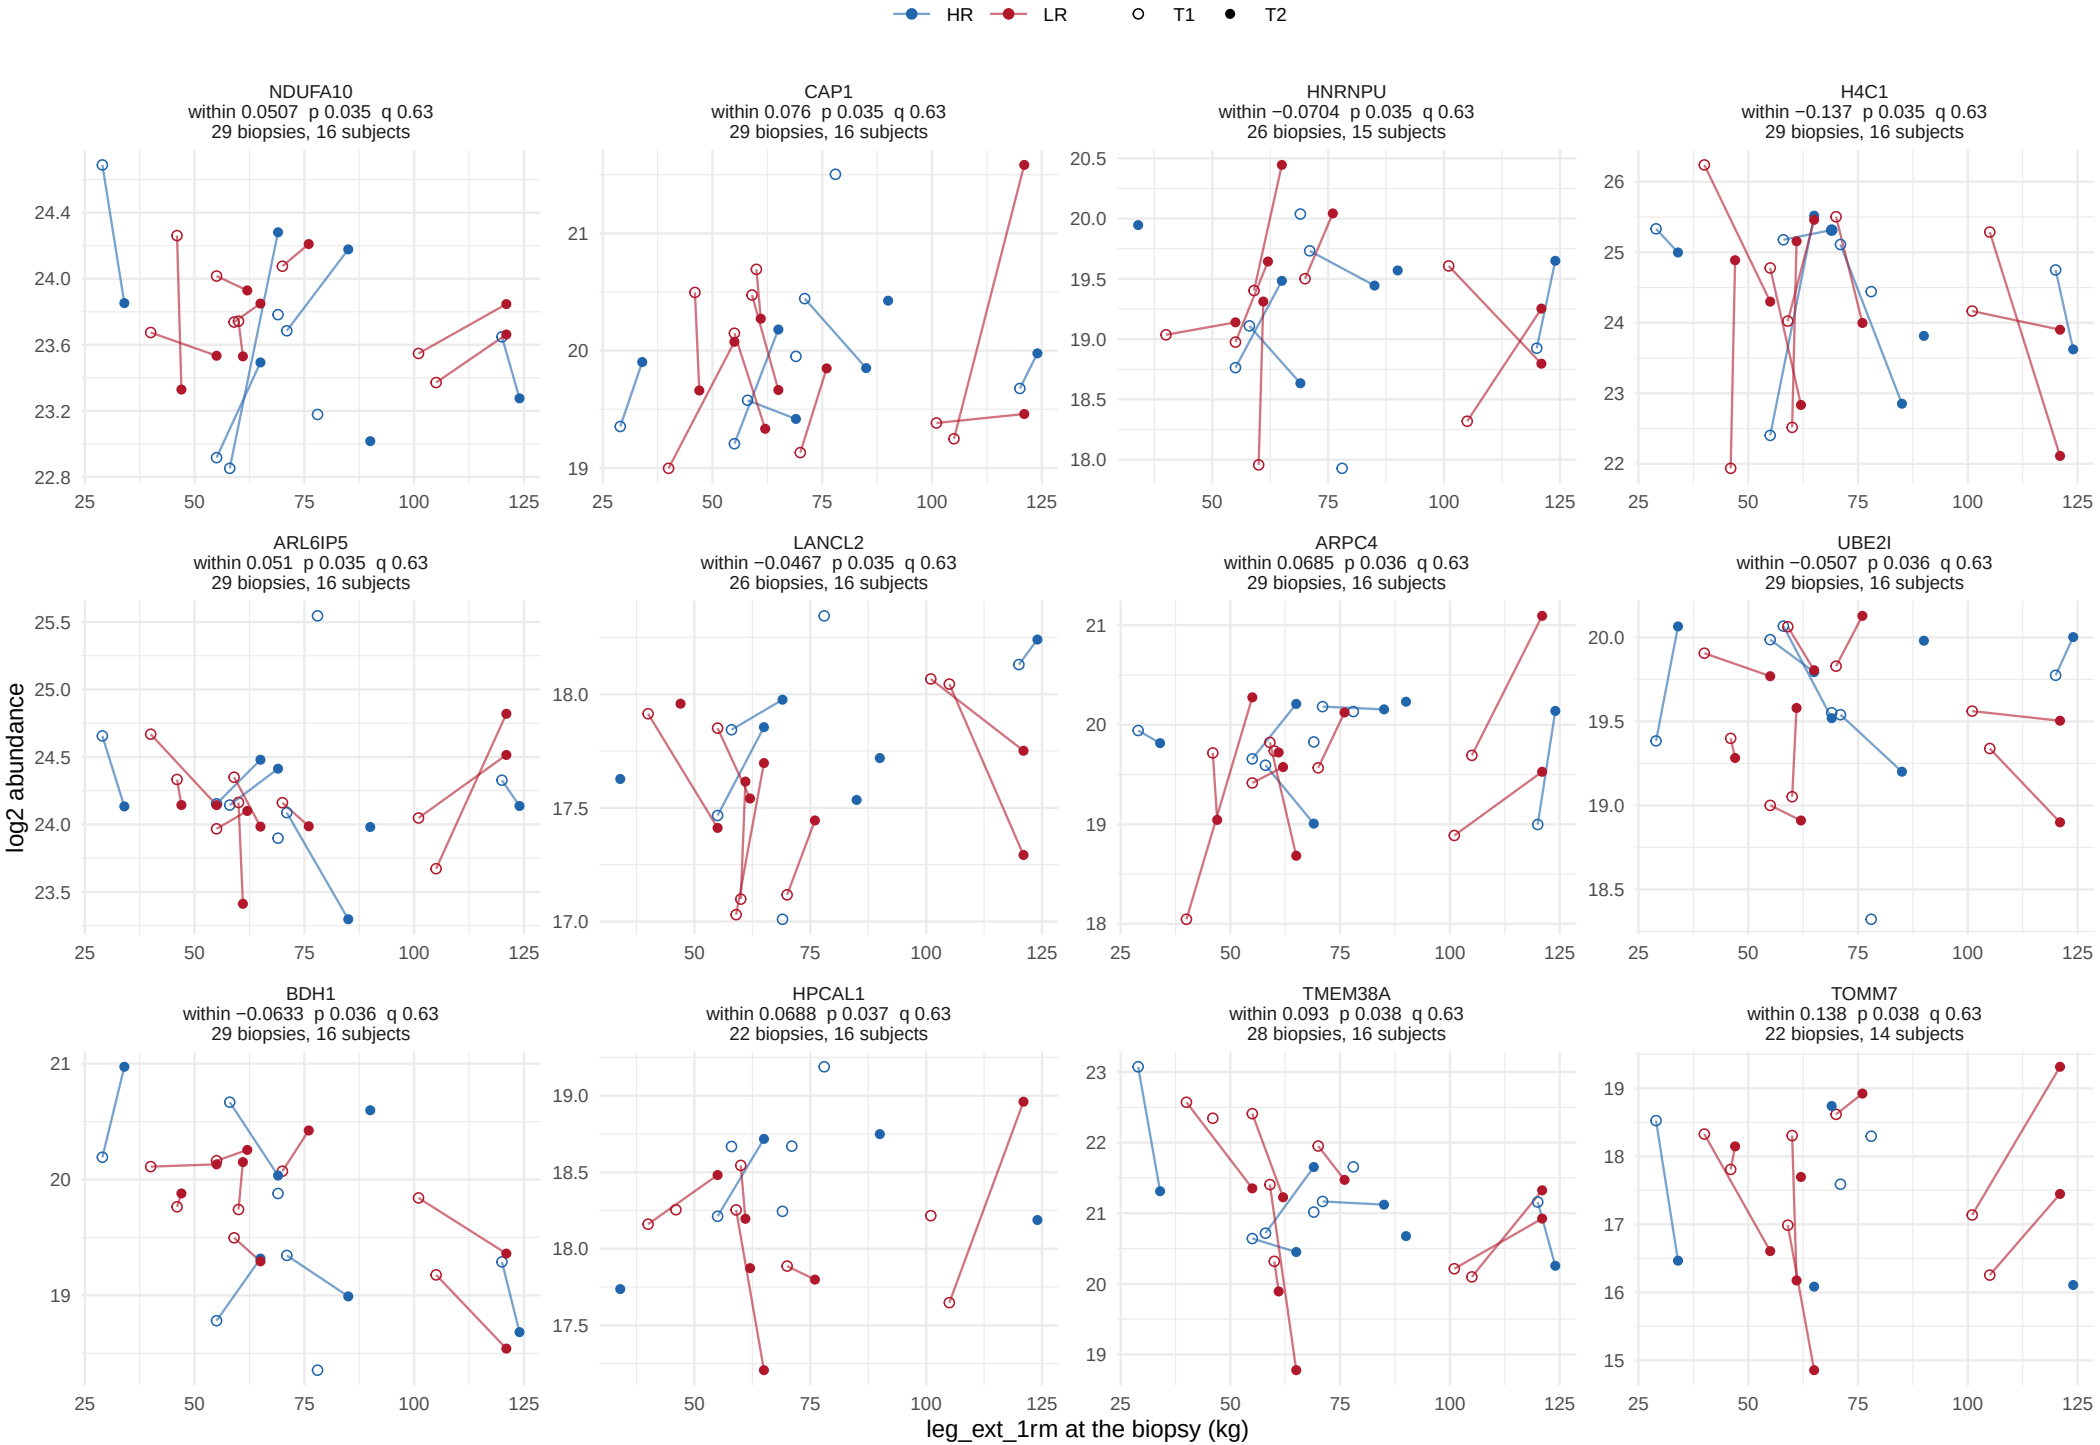

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_ext_1rm, within−person term


121 of 1615 proteins at p < 0.05, 0 at BH < 0.05. Page 9 of 11.

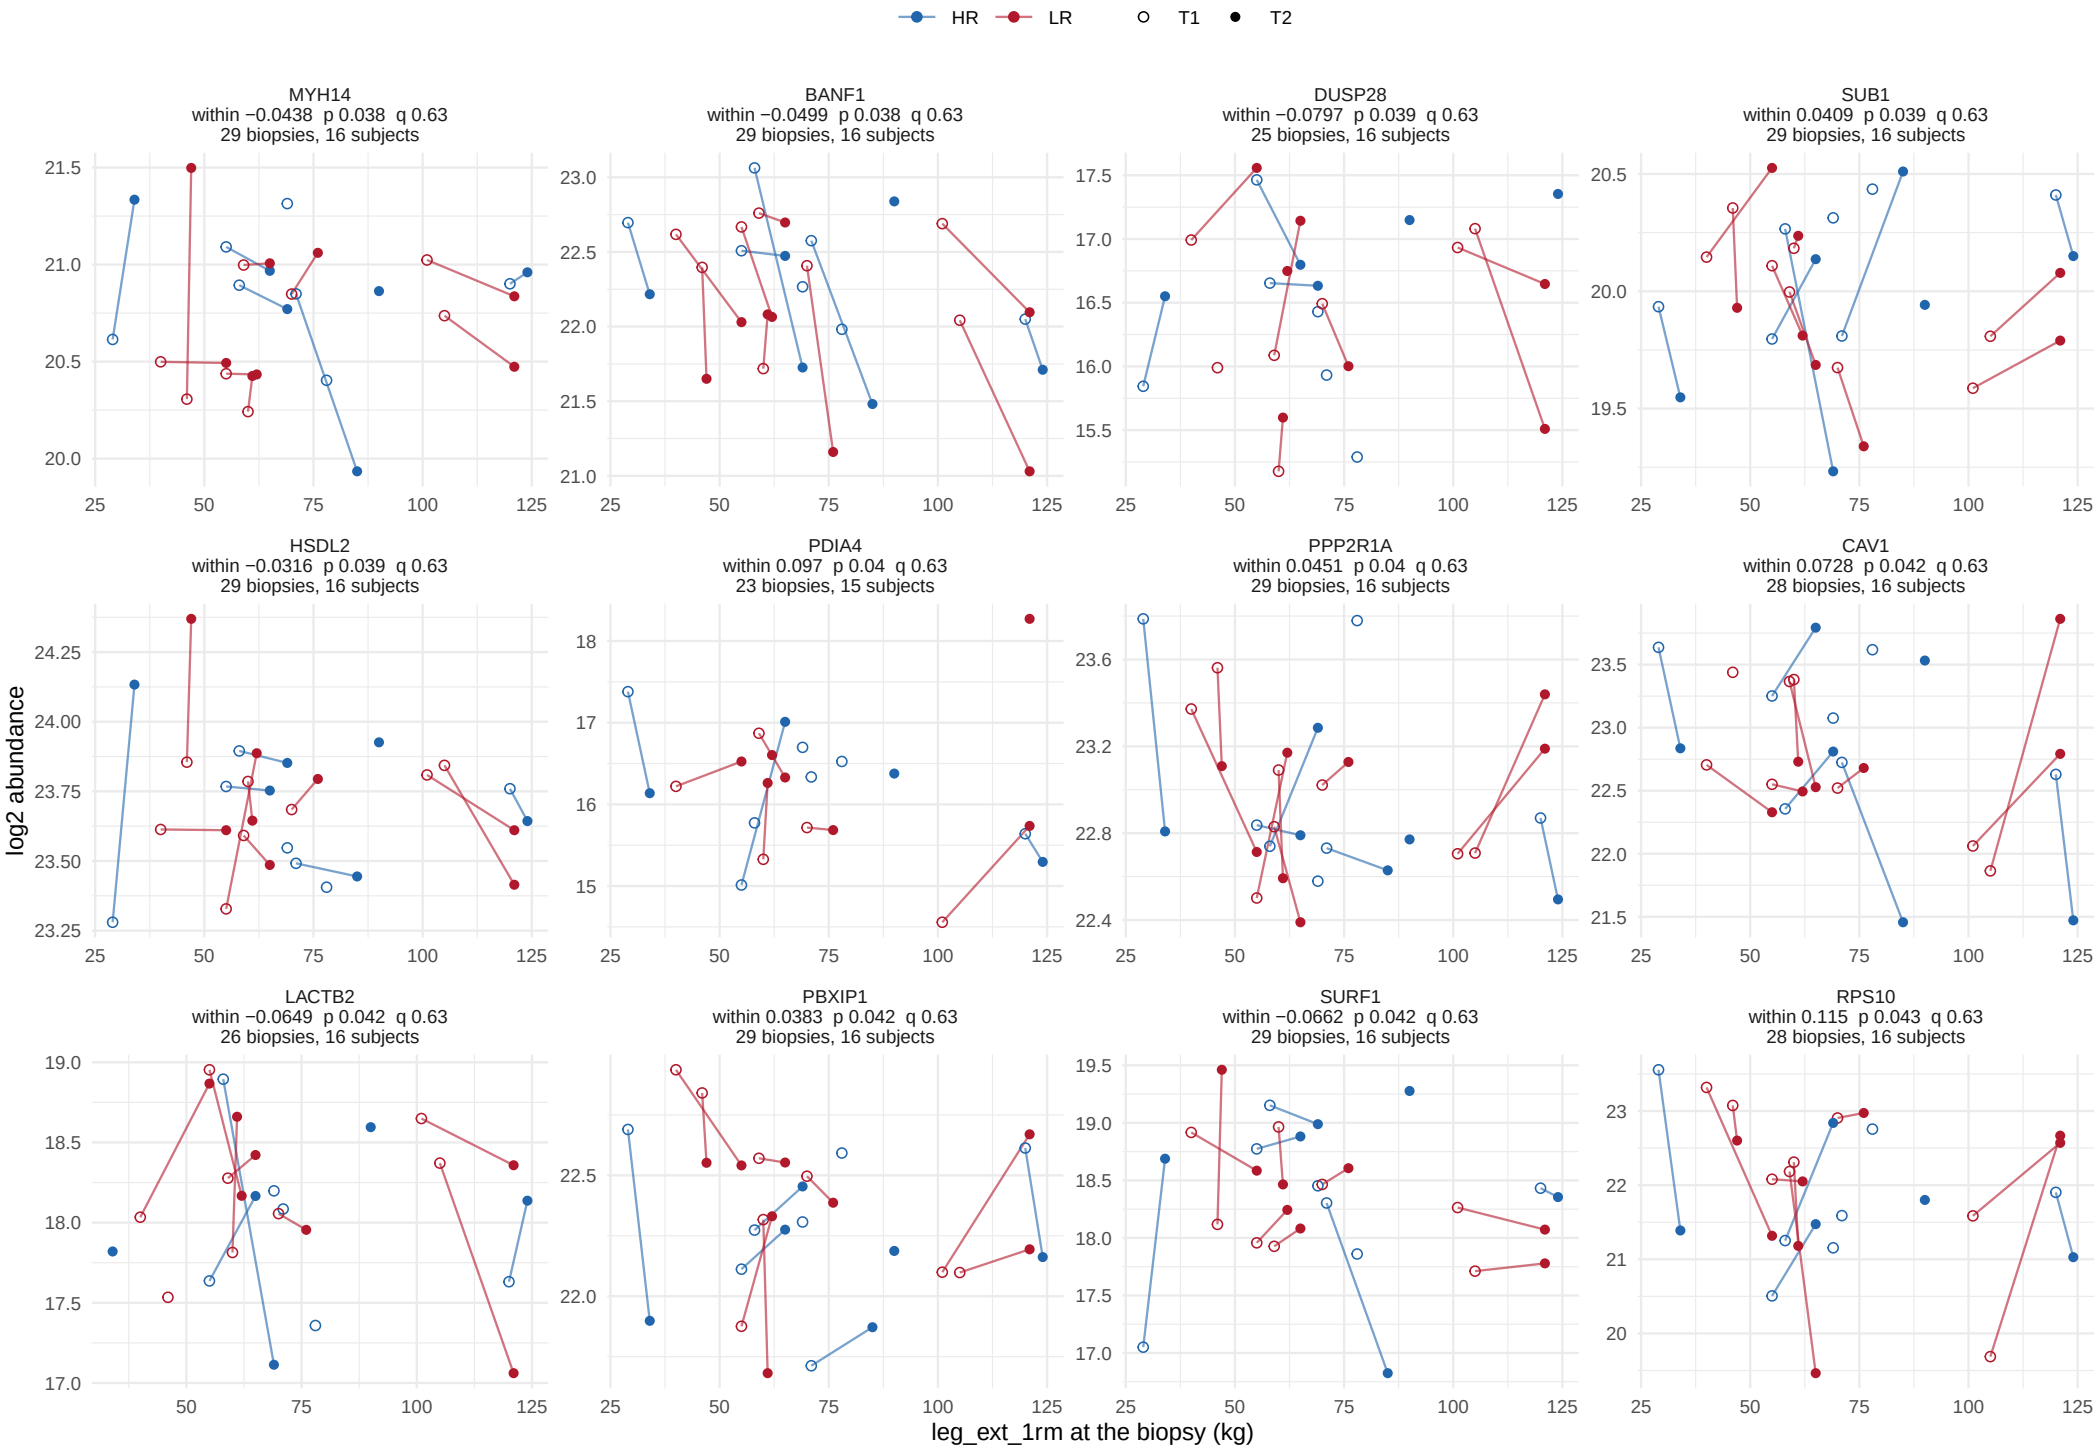

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_ext_1rm, within−person term


121 of 1615 proteins at p < 0.05, 0 at BH < 0.05. Page 10 of 11.

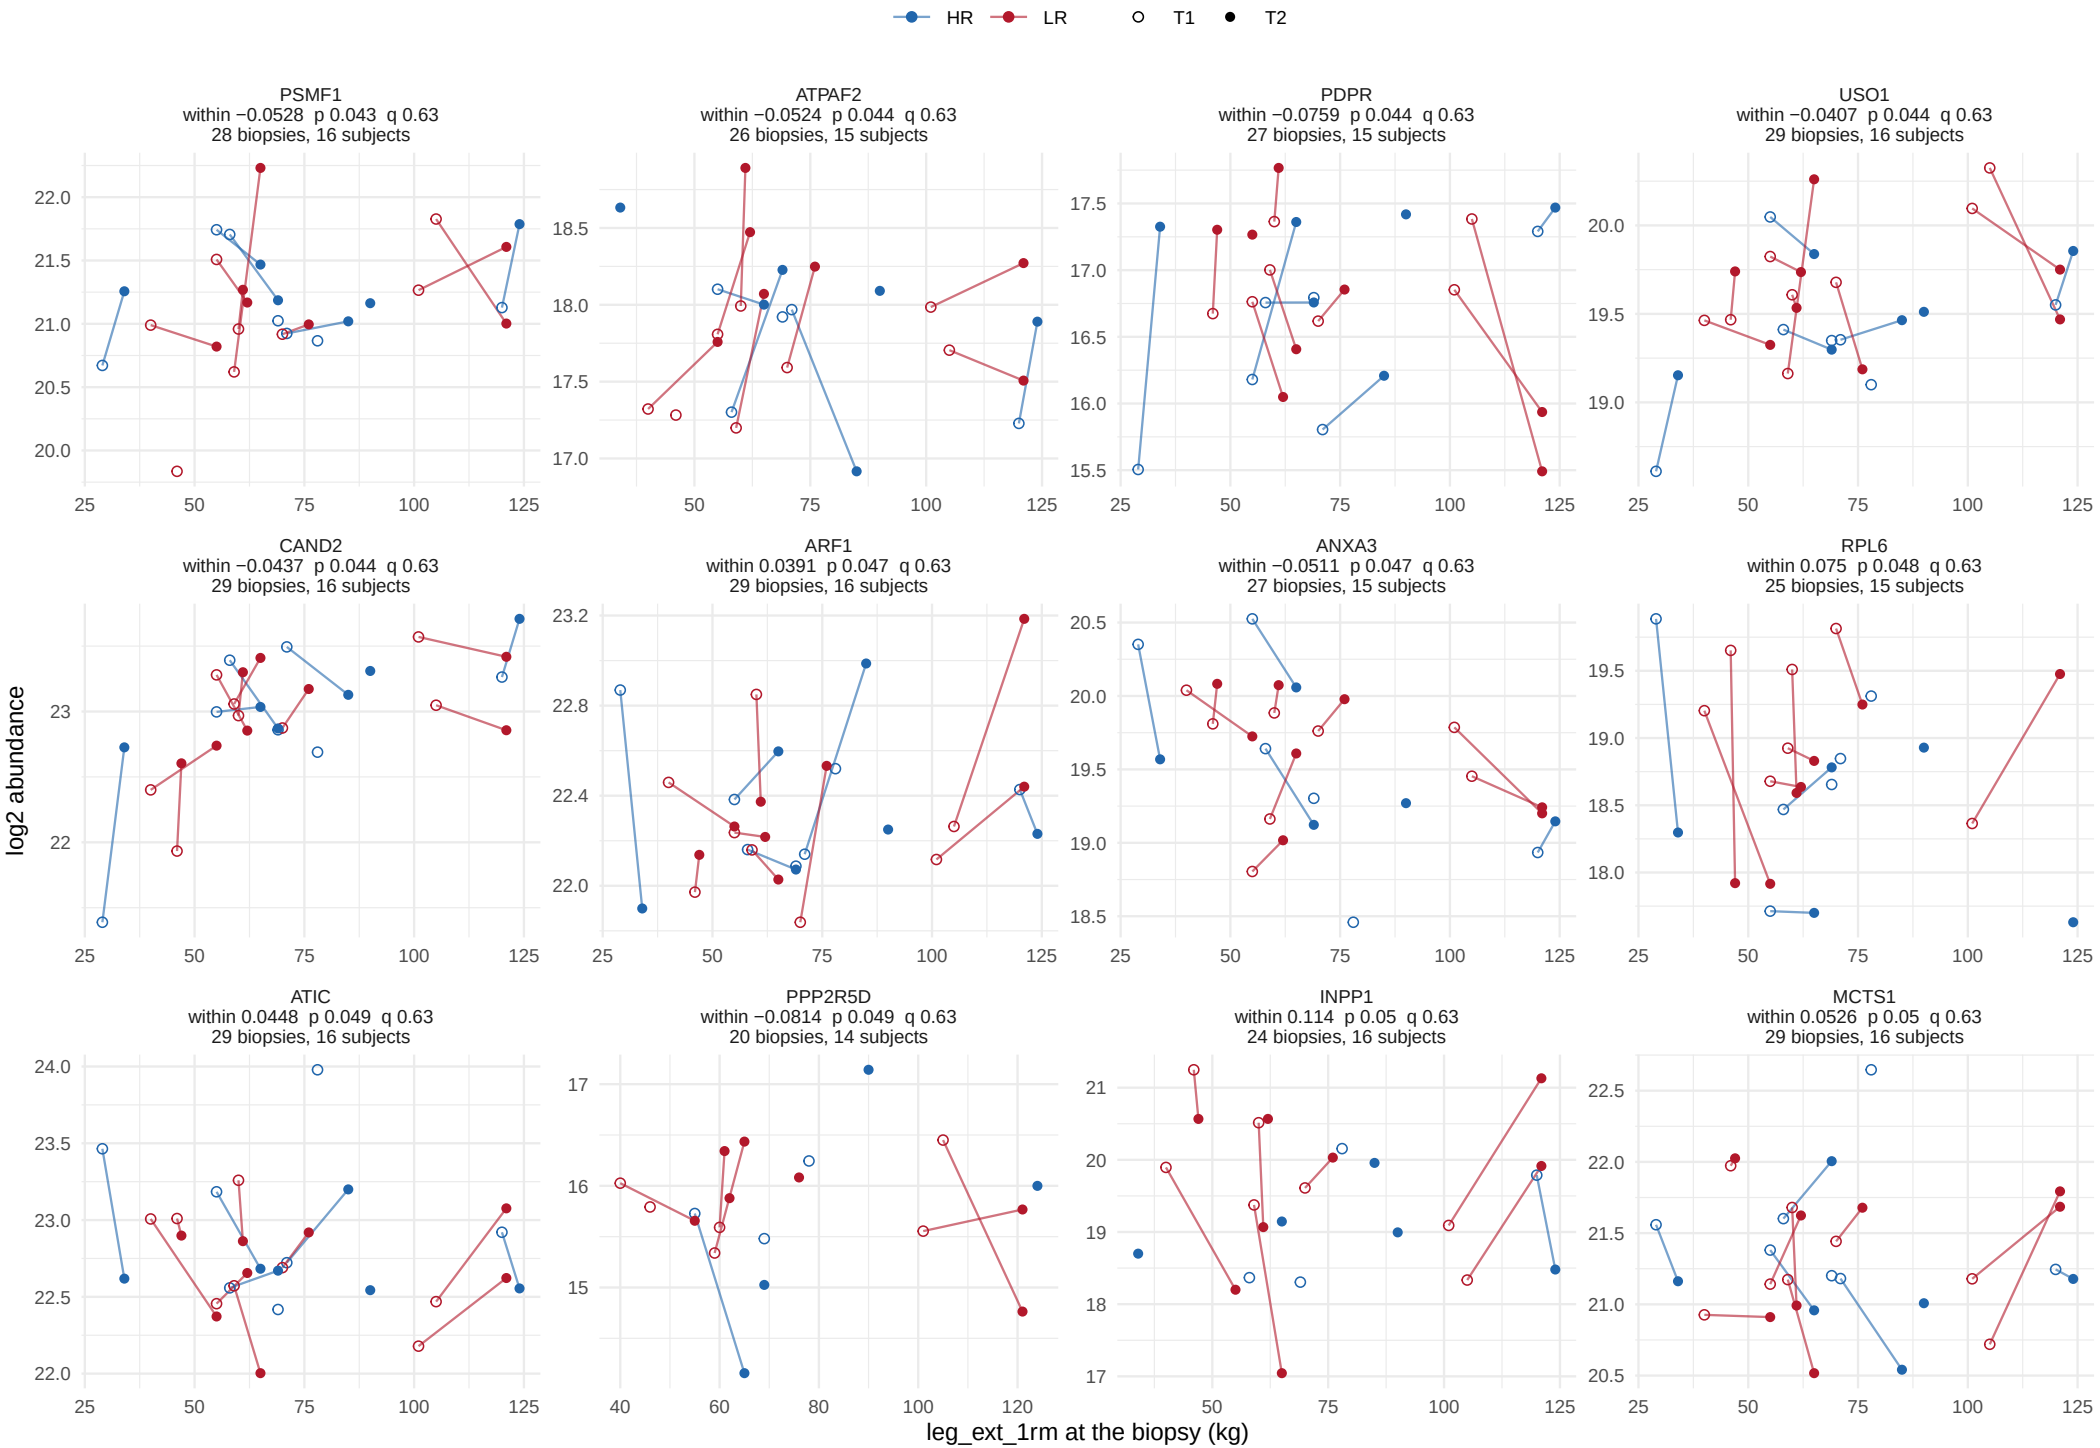

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_ext_1rm, within−person term


121 of 1615 proteins at p < 0.05, 0 at BH < 0.05. Page 11 of 11.

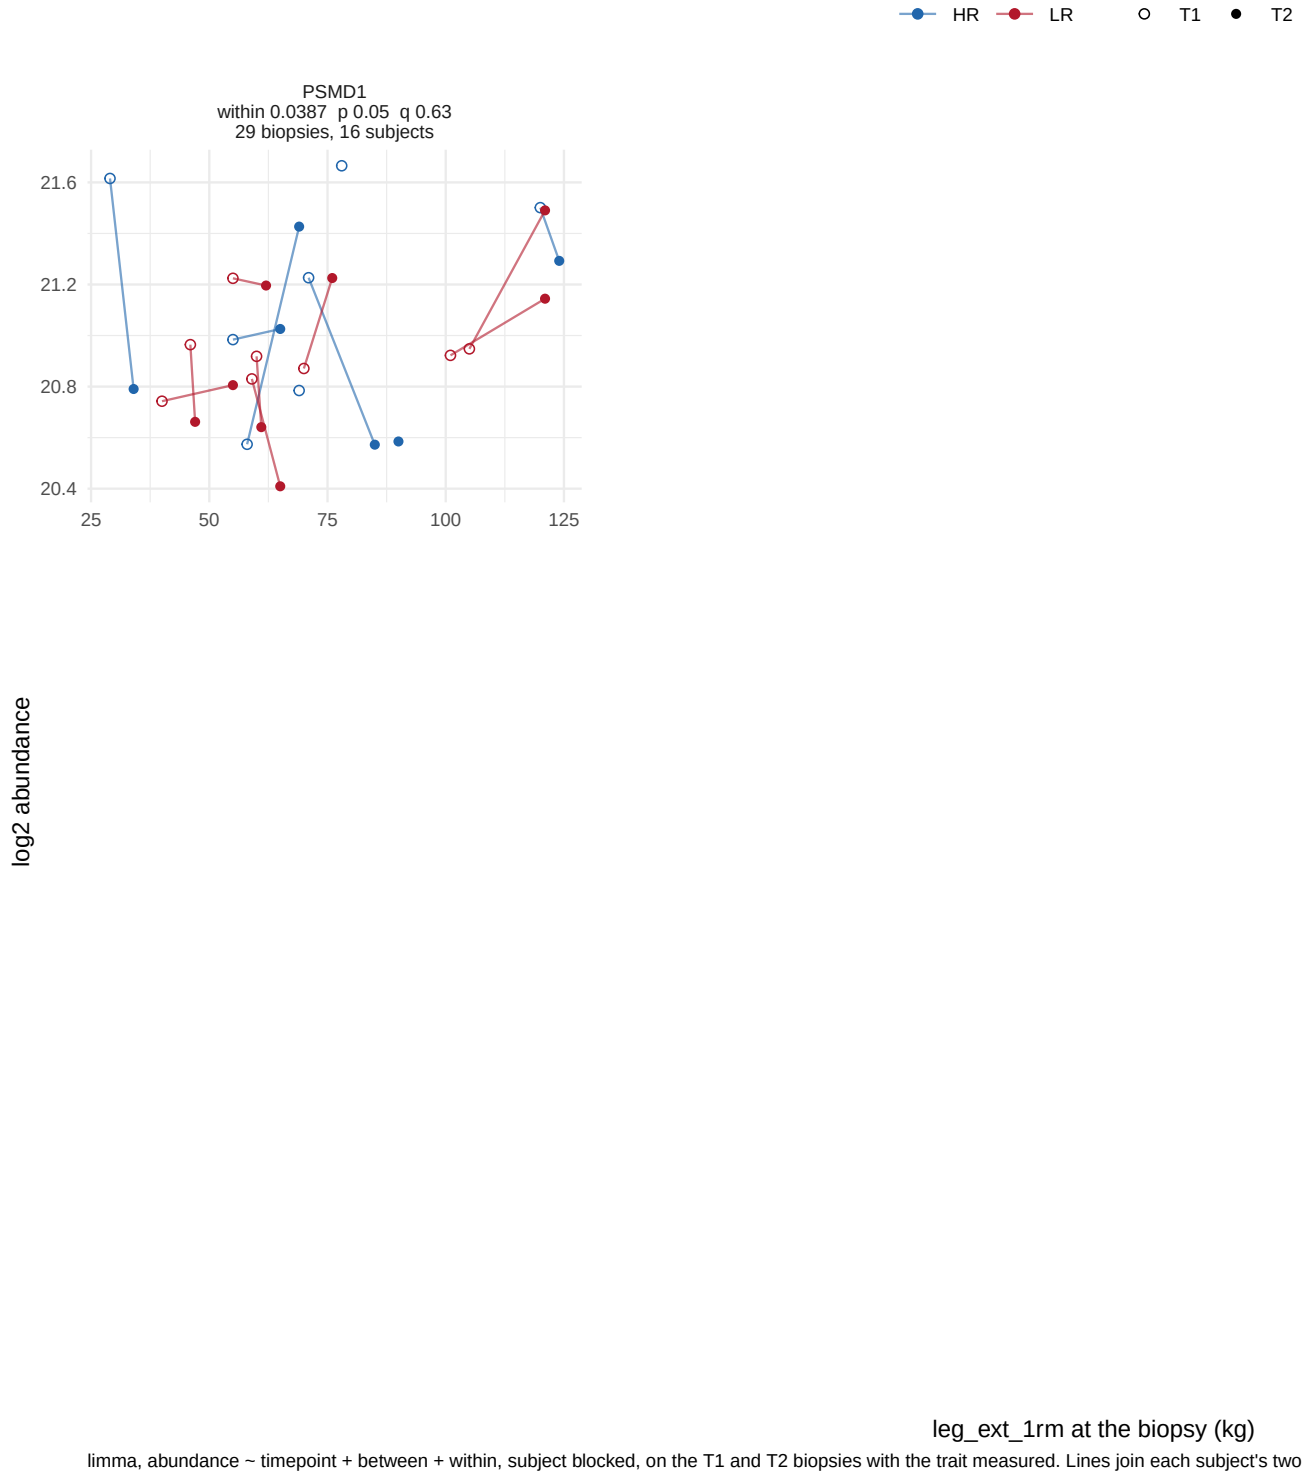

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_ext_1rm, between−person term


111 of 1615 proteins at p < 0.05, 0 at BH < 0.05. Page 1 of 10.

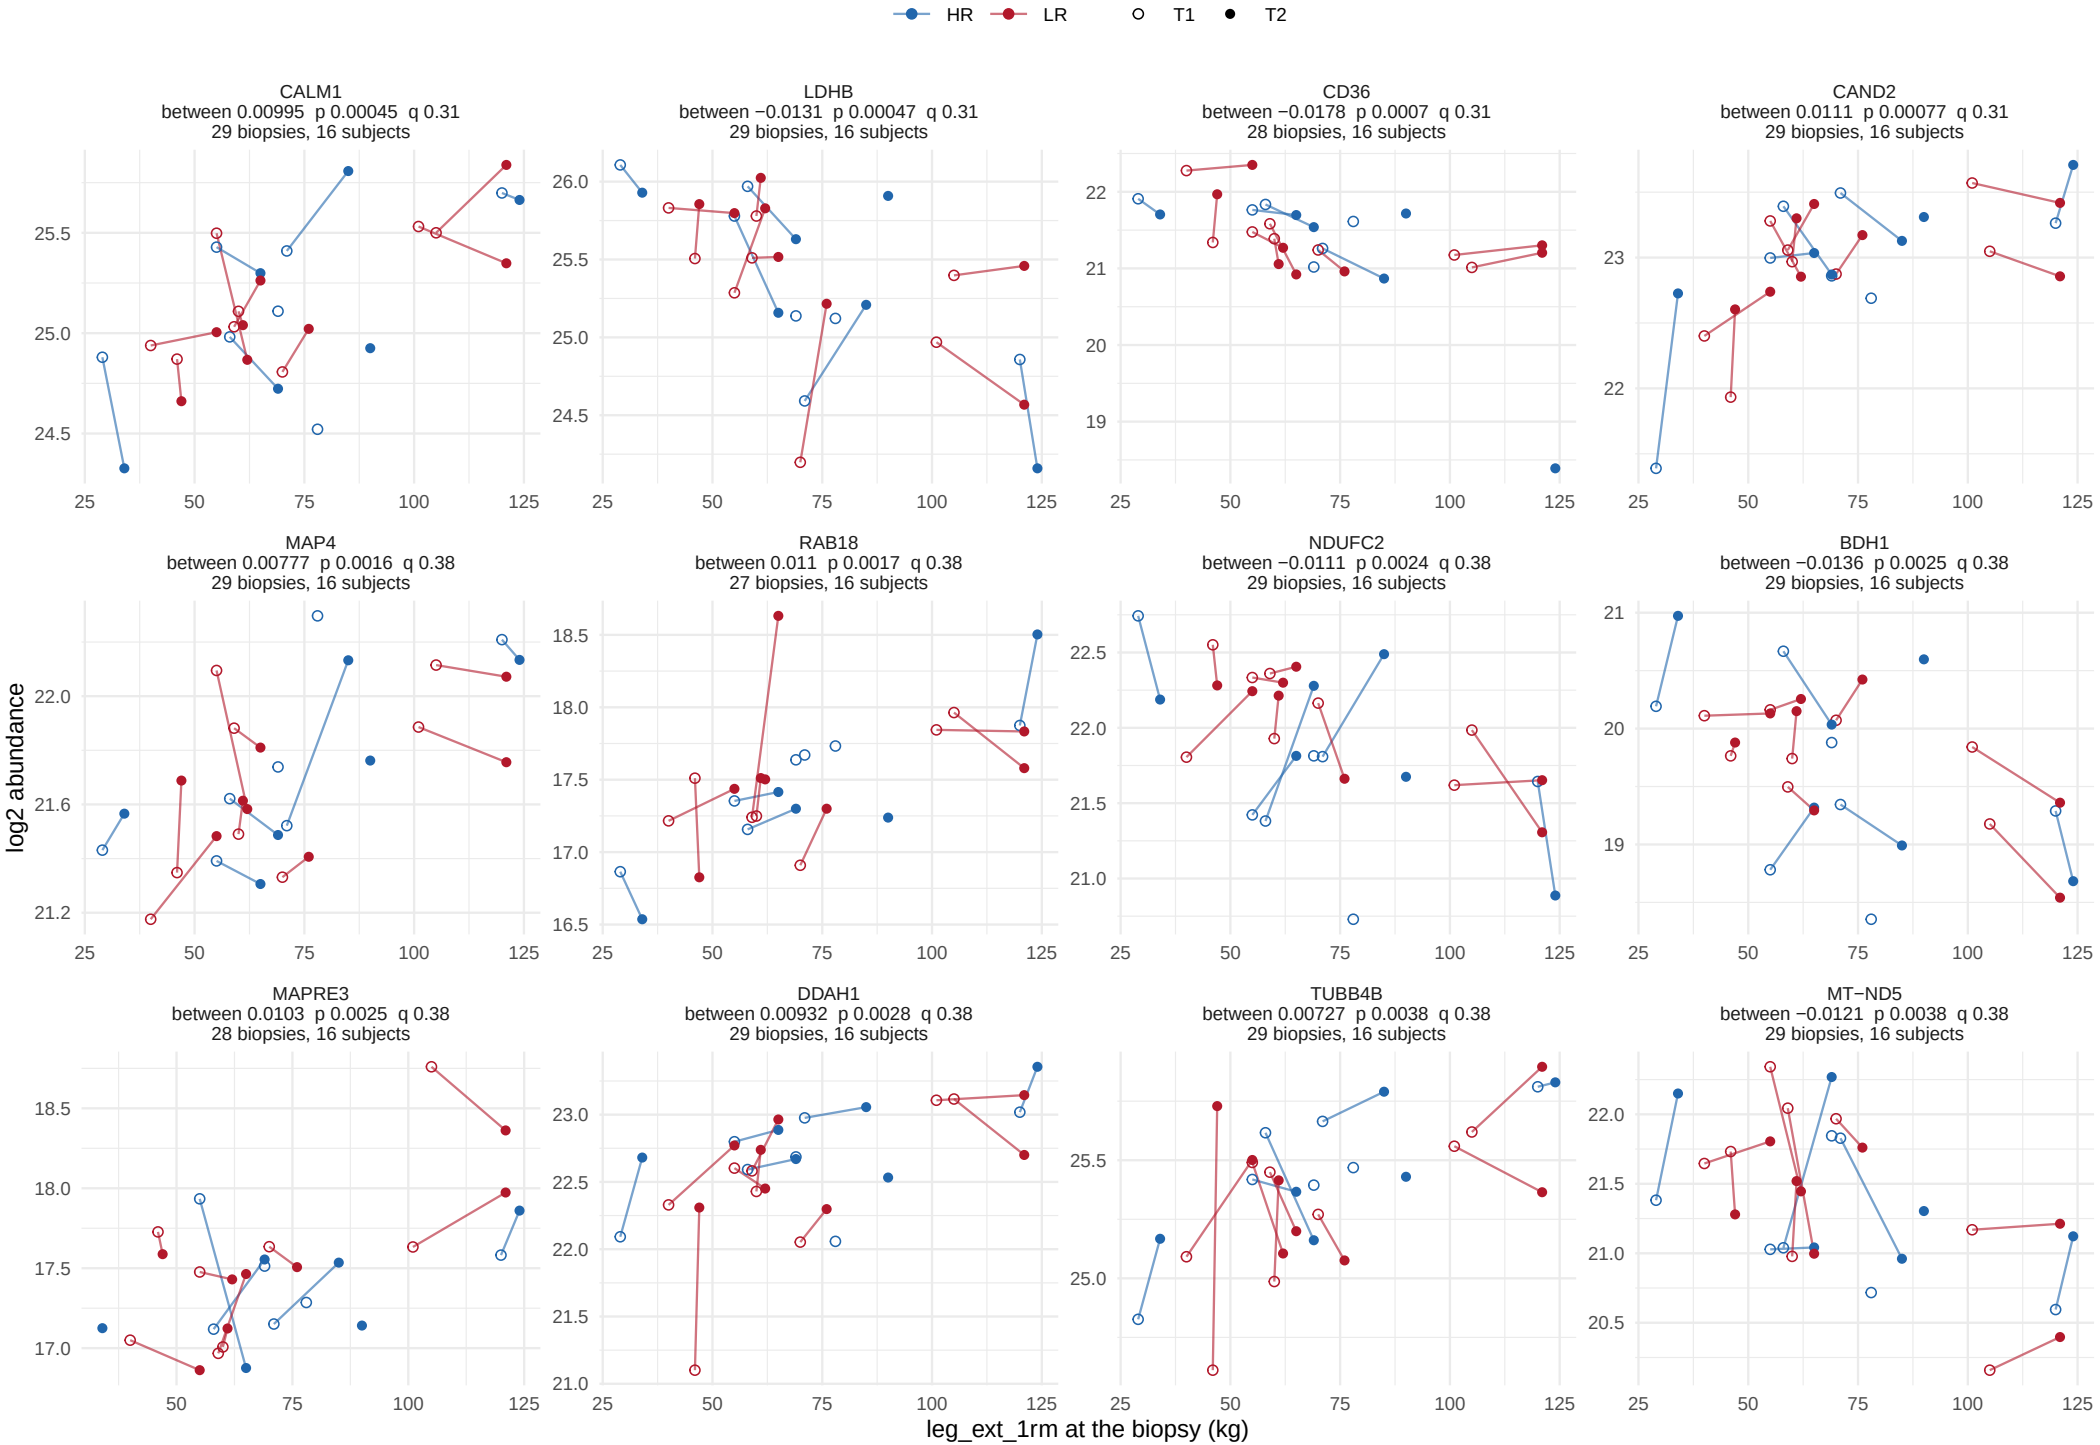

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_ext_1rm, between−person term


111 of 1615 proteins at p < 0.05, 0 at BH < 0.05. Page 2 of 10.

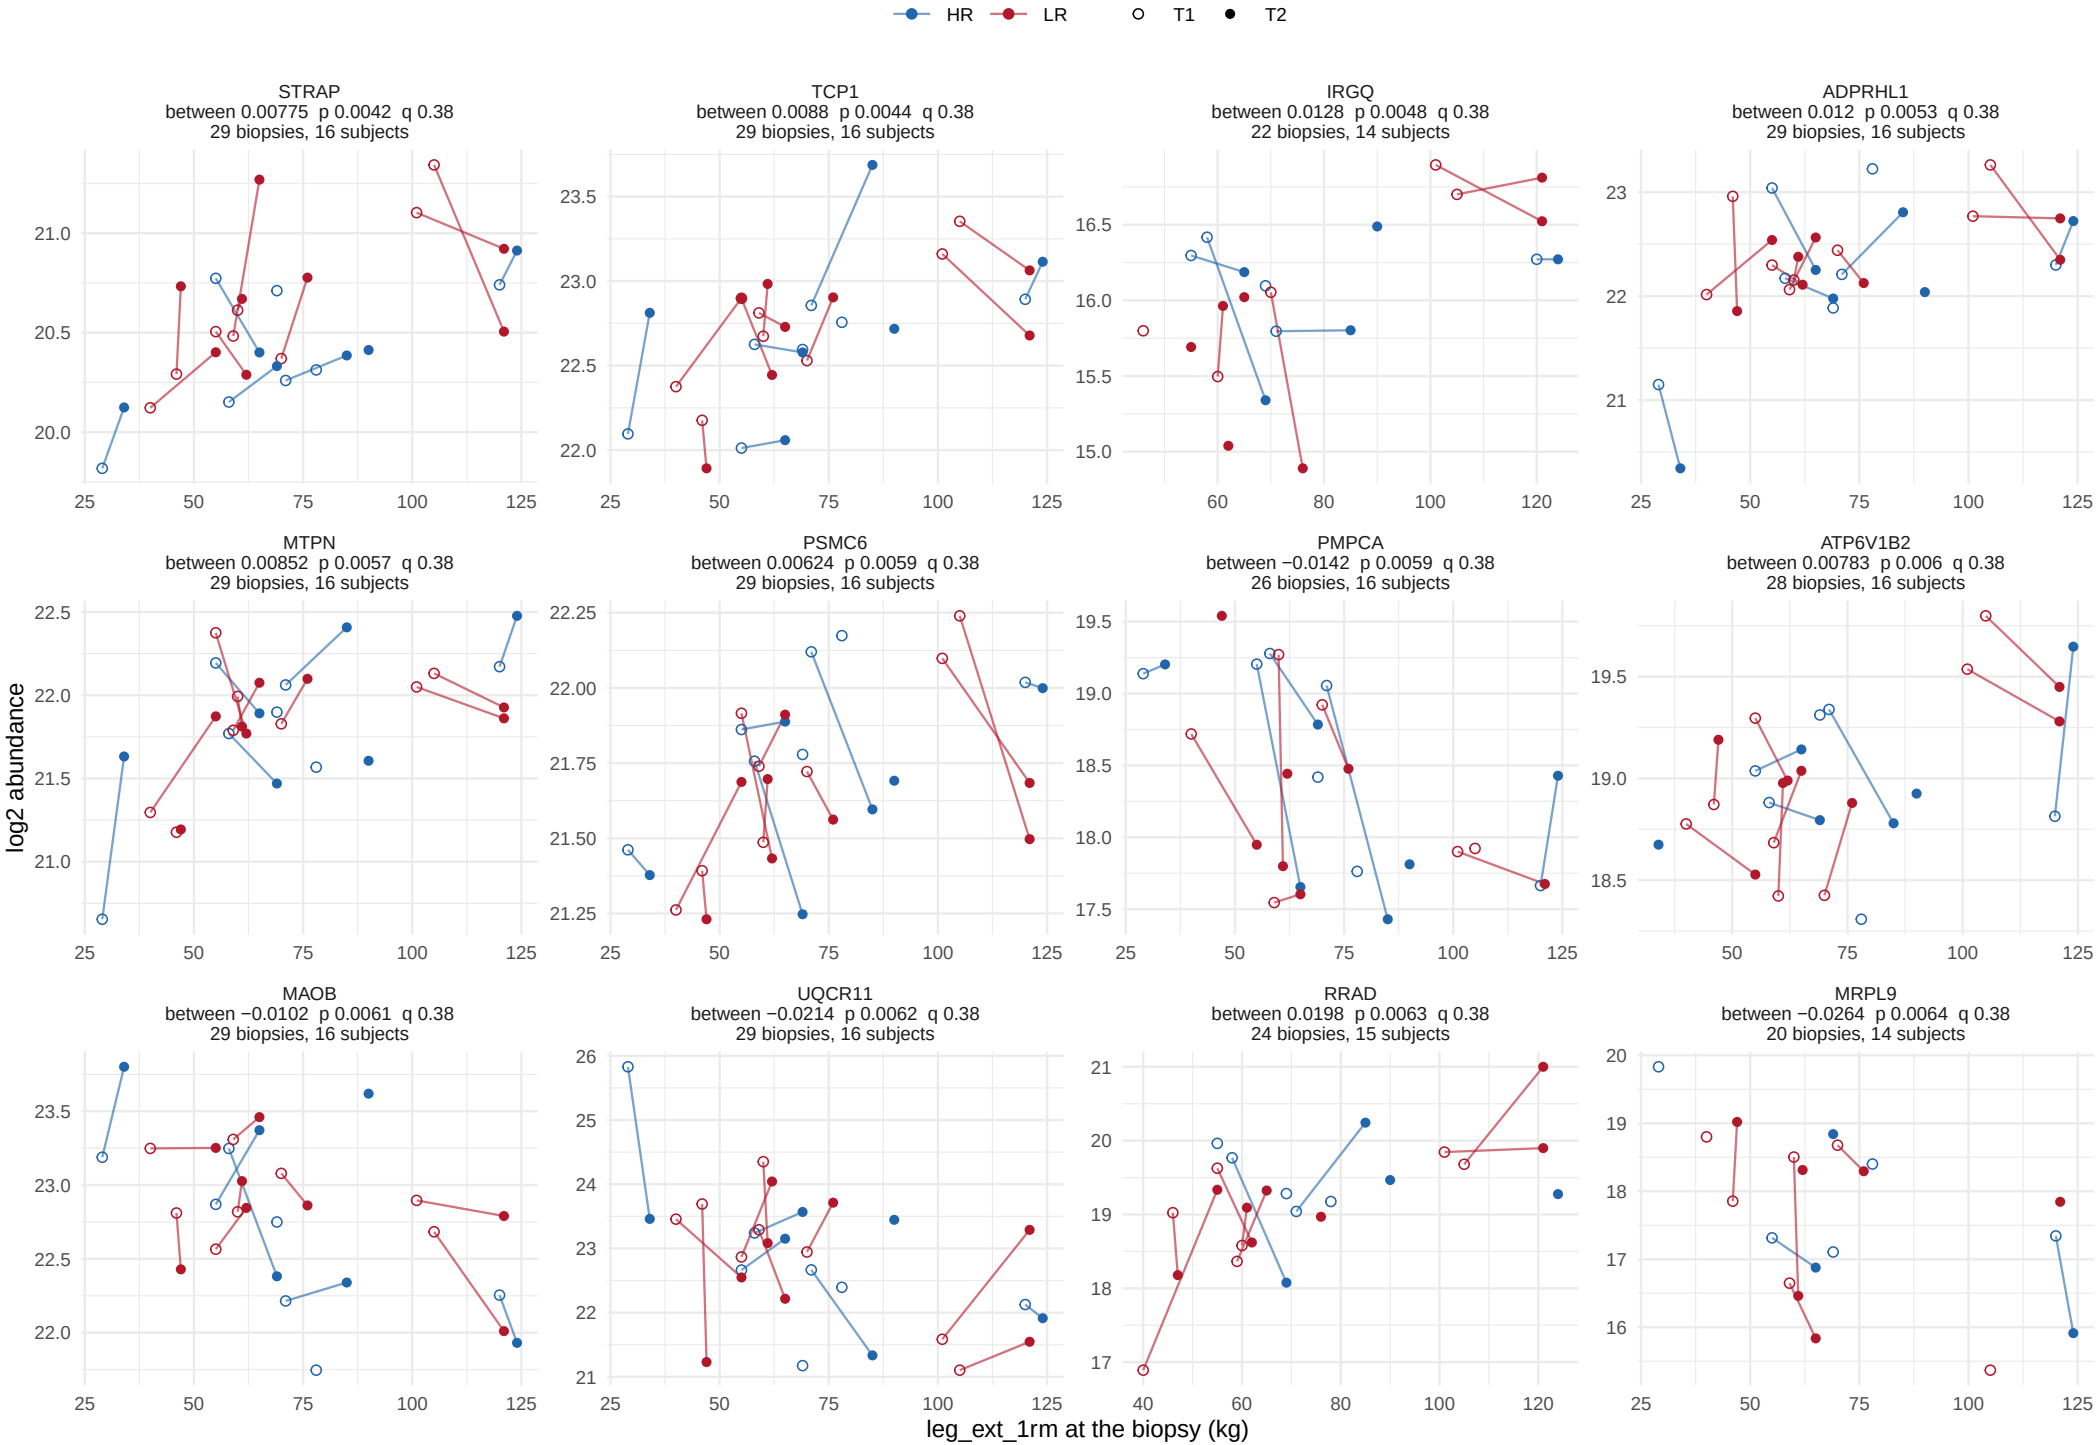

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_ext_1rm, between−person term


111 of 1615 proteins at p < 0.05, 0 at BH < 0.05. Page 3 of 10.

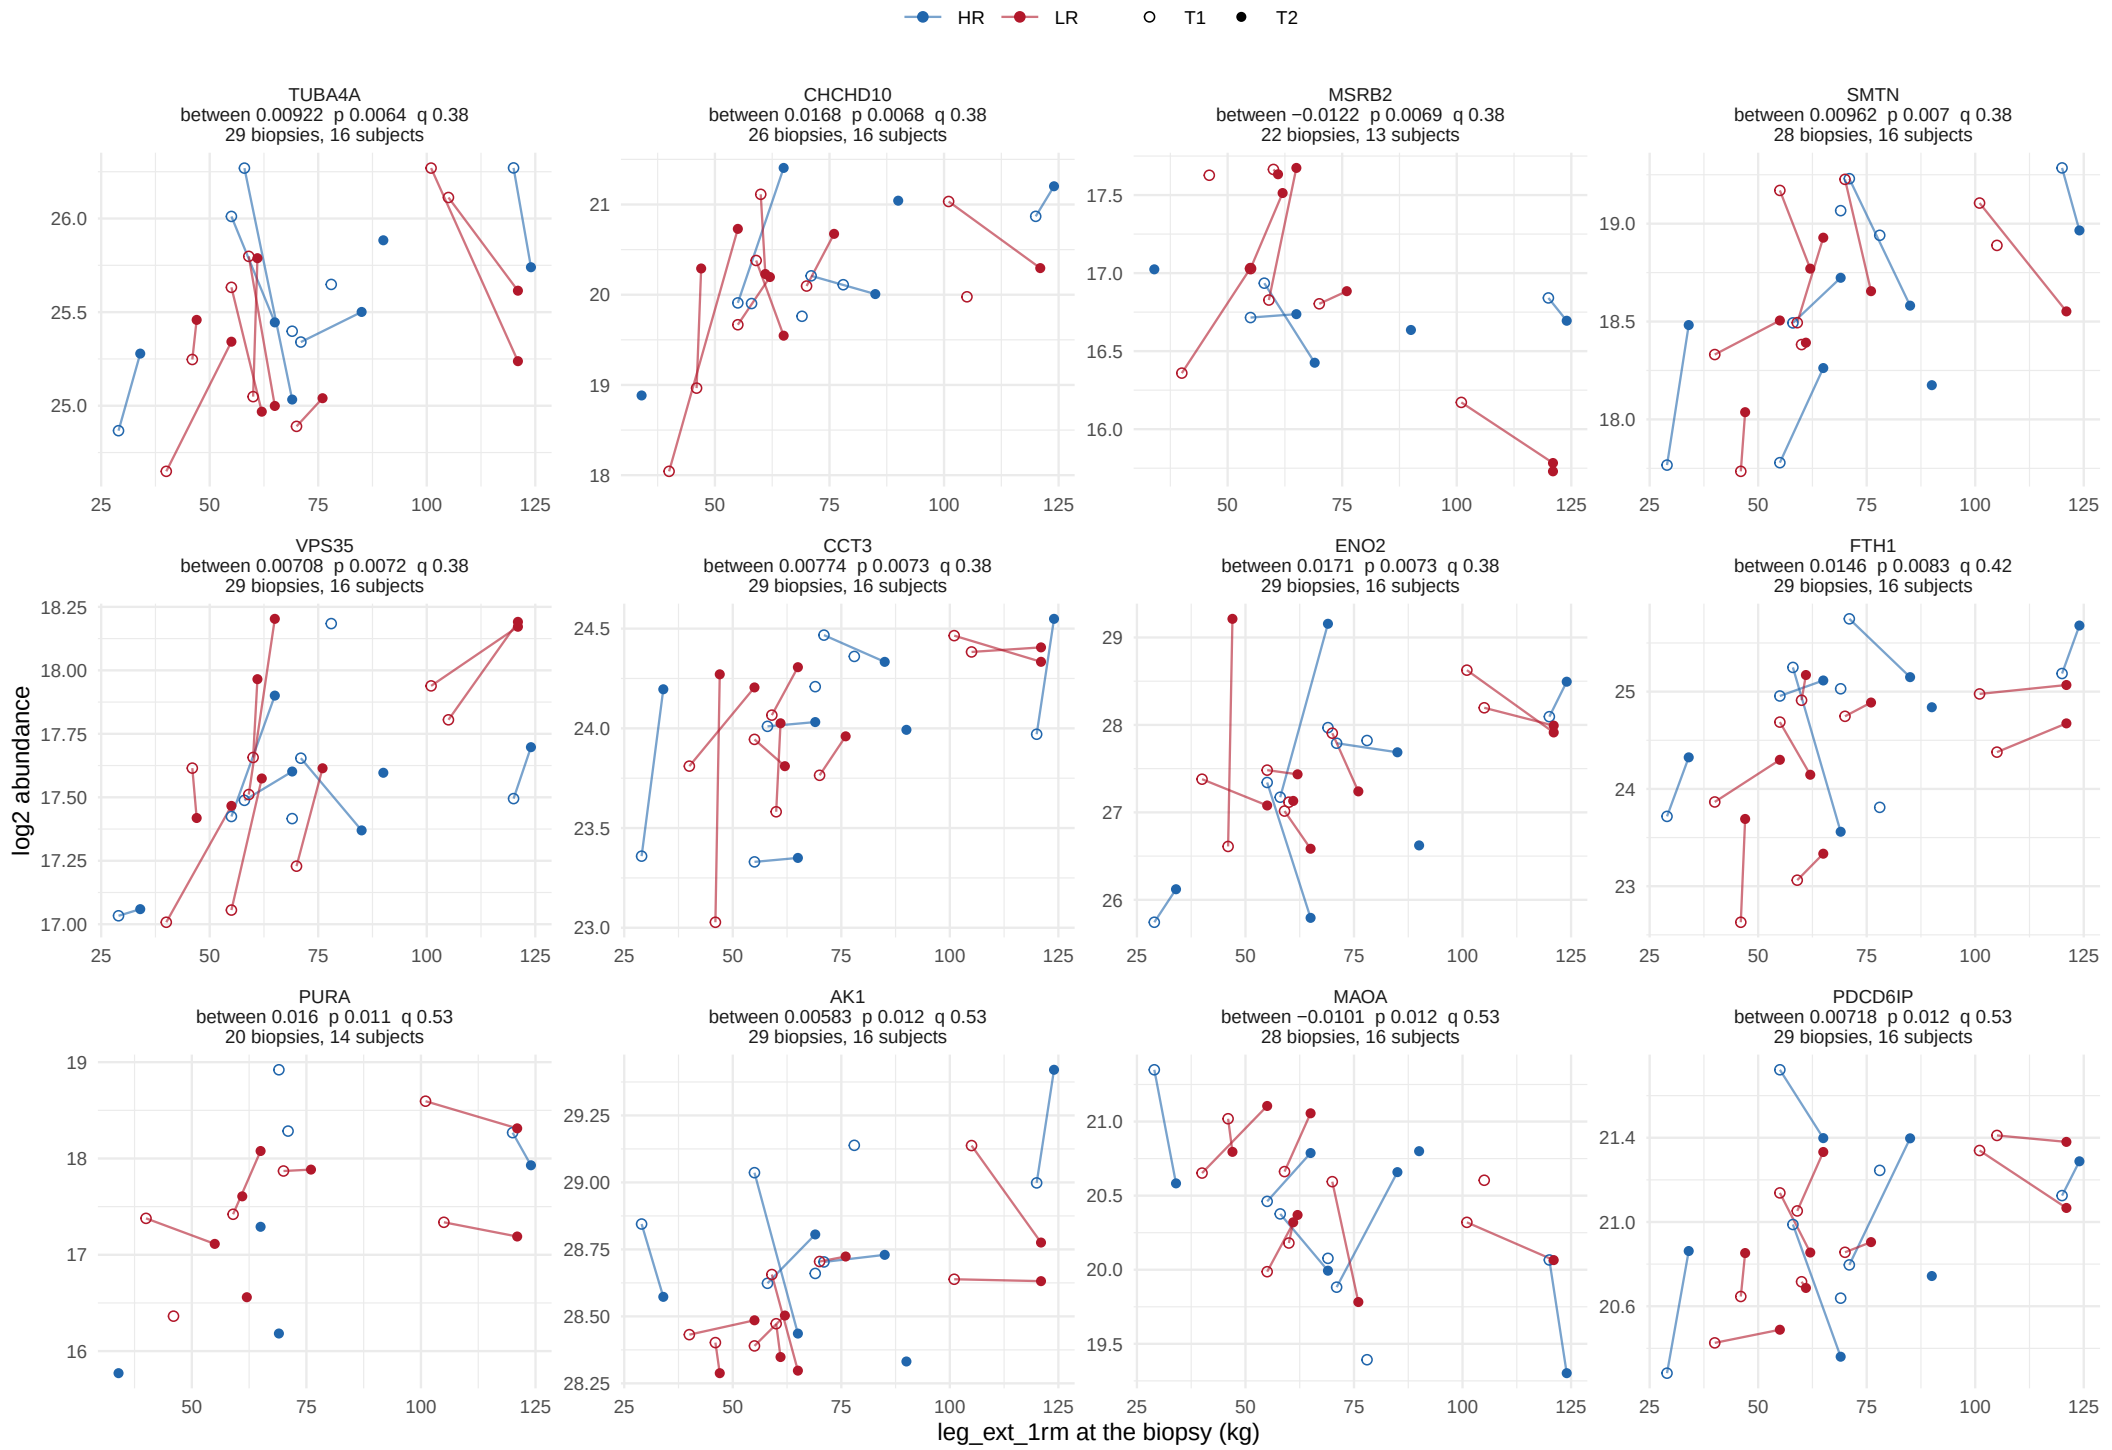

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_ext_1rm, between−person term


111 of 1615 proteins at p < 0.05, 0 at BH < 0.05. Page 4 of 10.

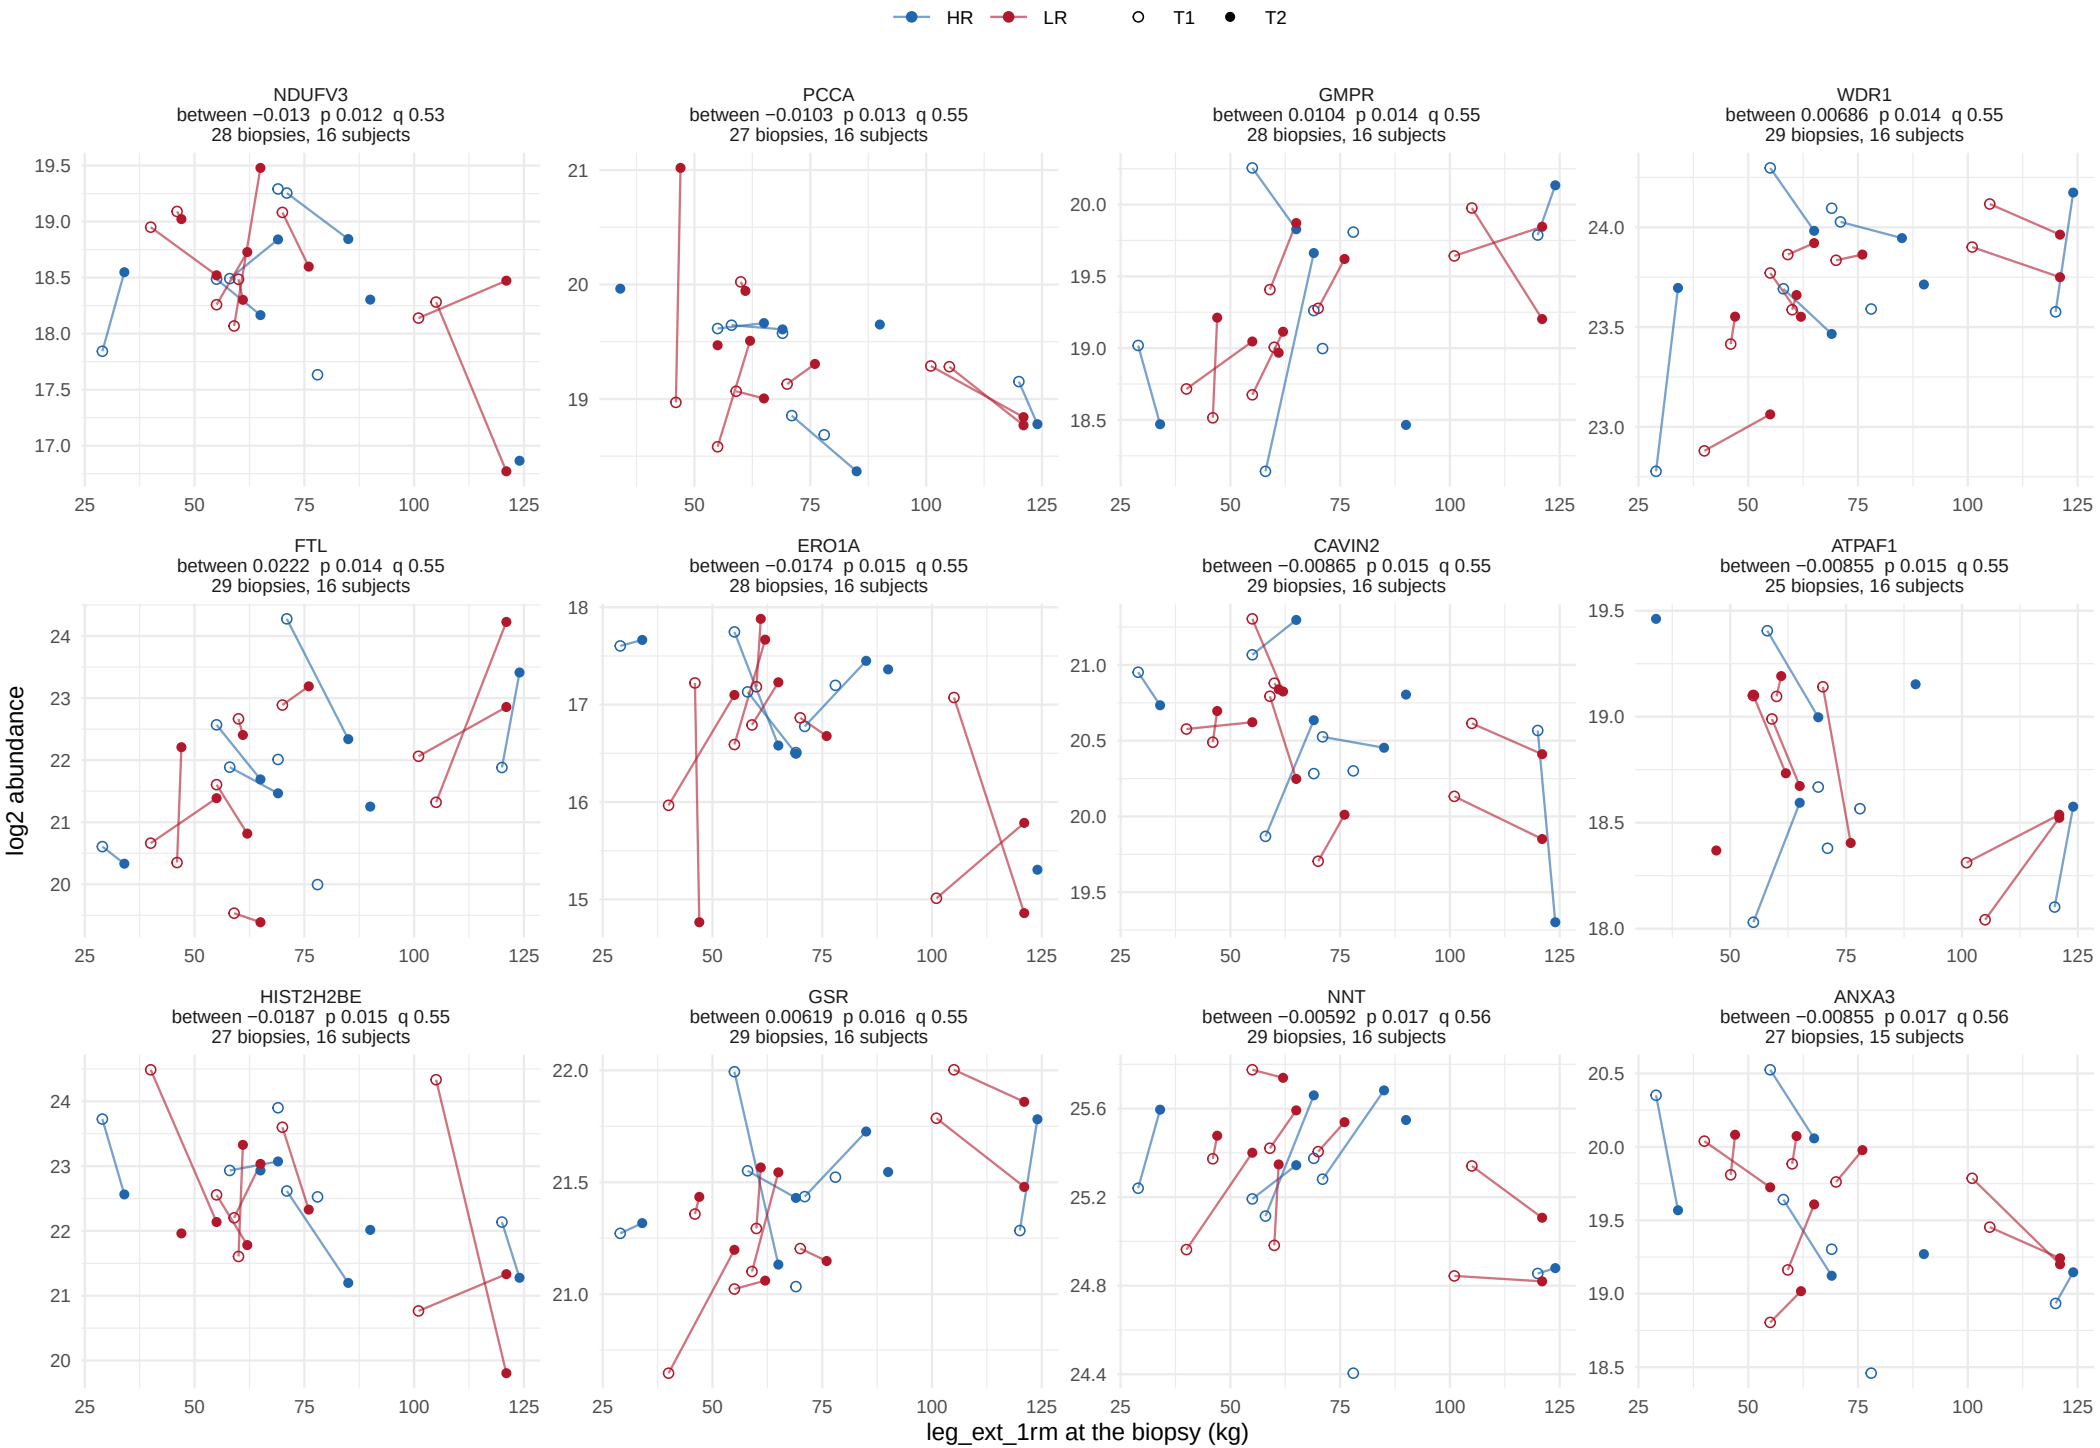

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_ext_1rm, between−person term


111 of 1615 proteins at p < 0.05, 0 at BH < 0.05. Page 5 of 10.

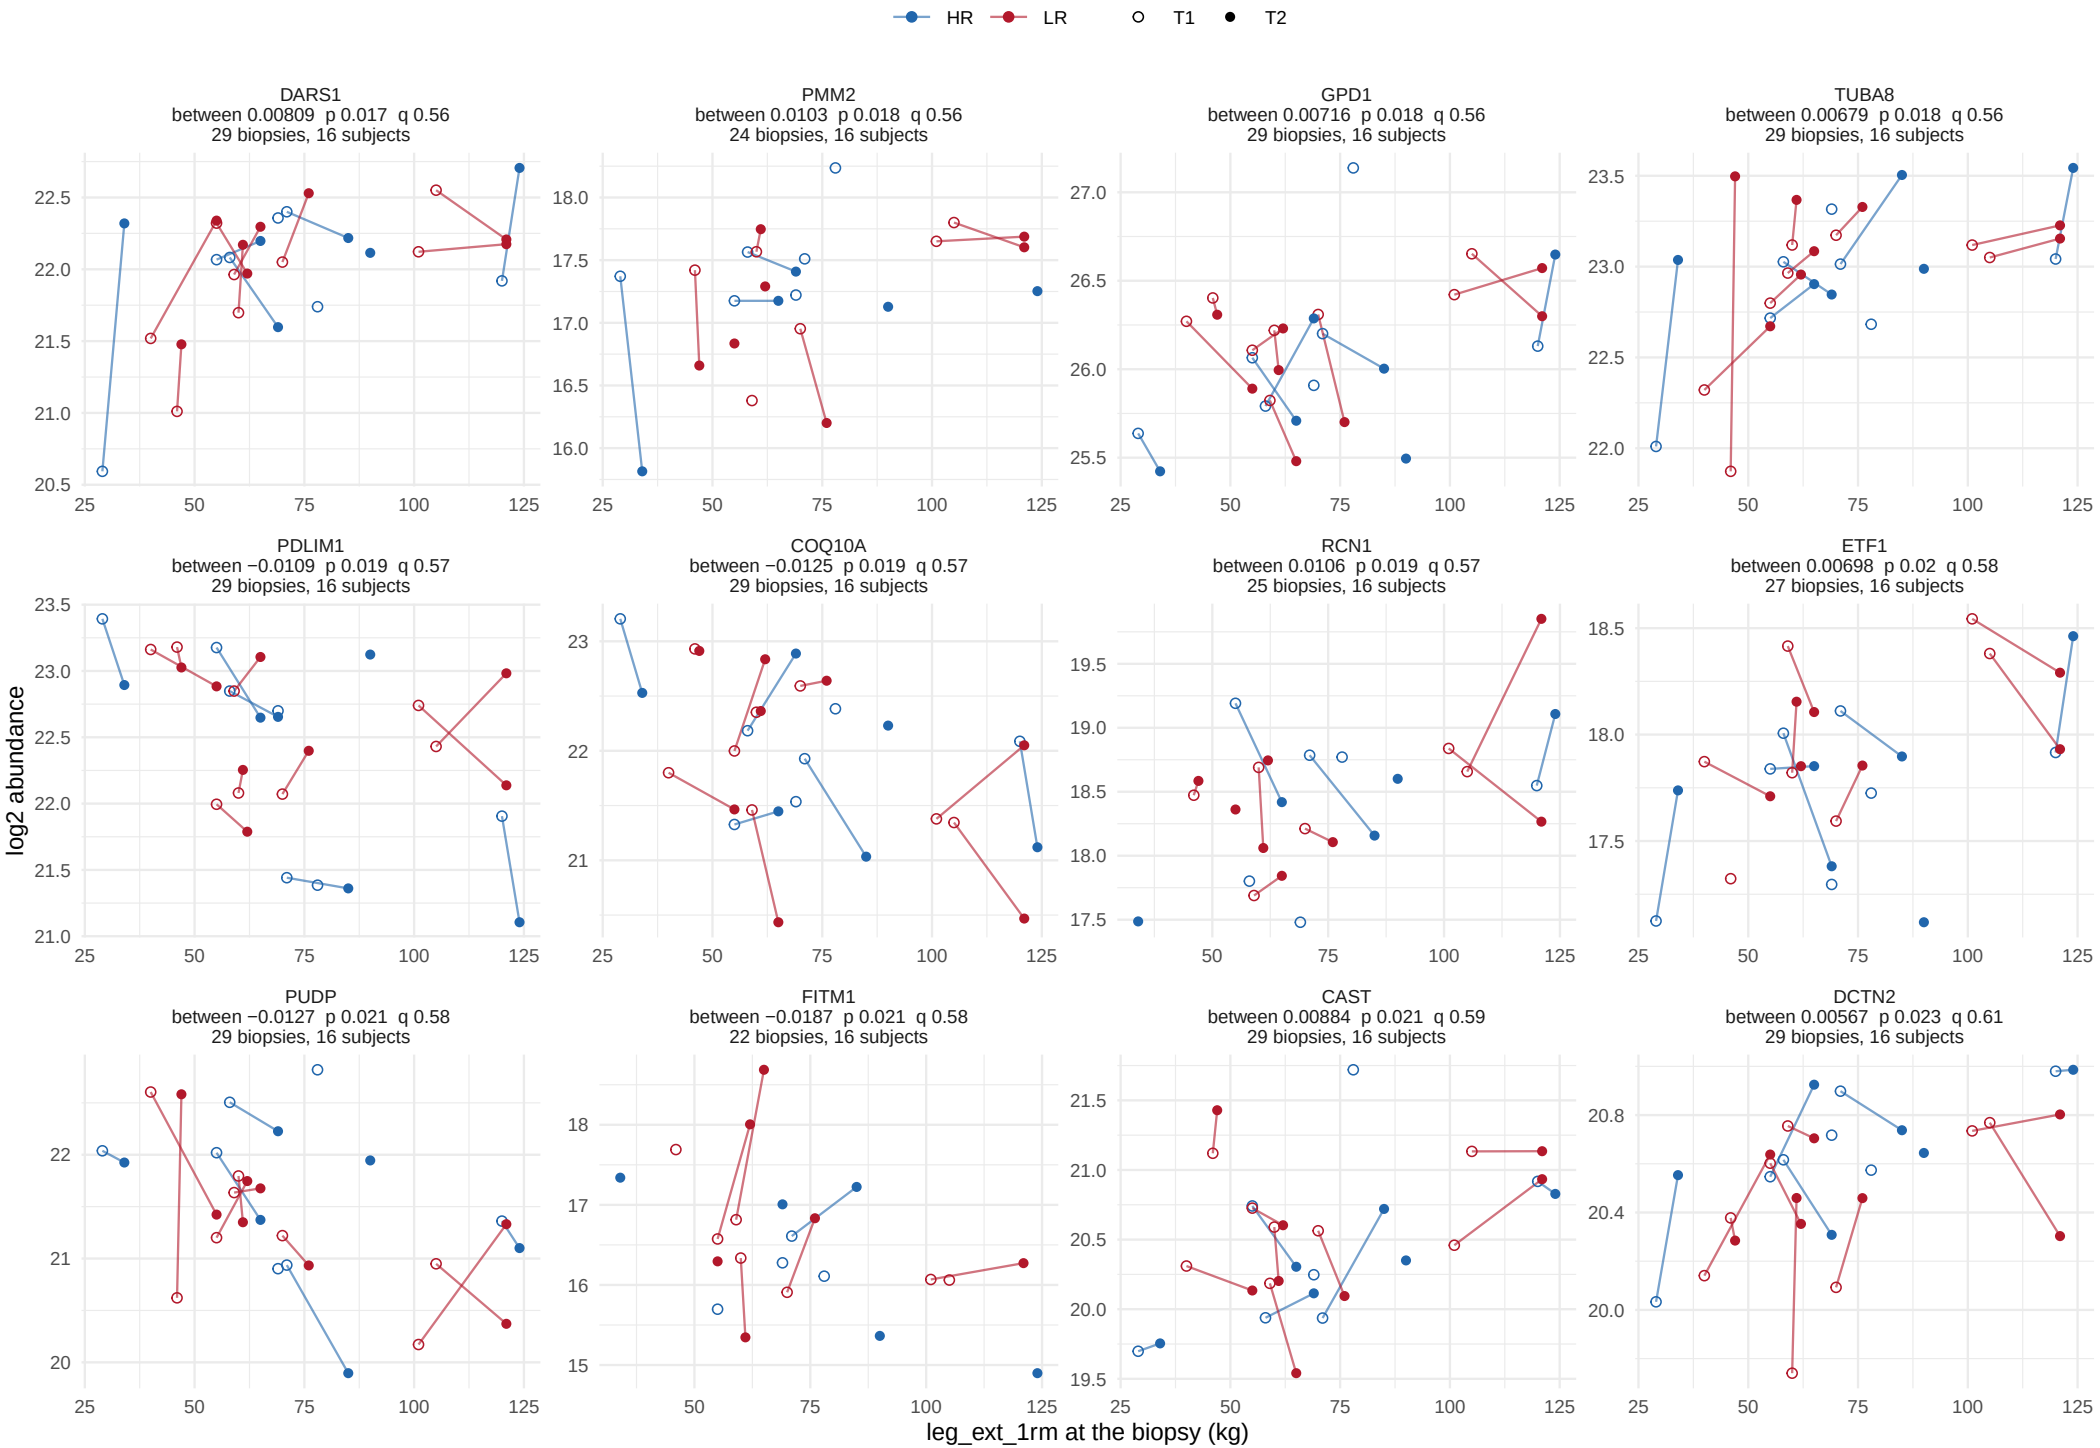

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_ext_1rm, between−person term


111 of 1615 proteins at p < 0.05, 0 at BH < 0.05. Page 6 of 10.

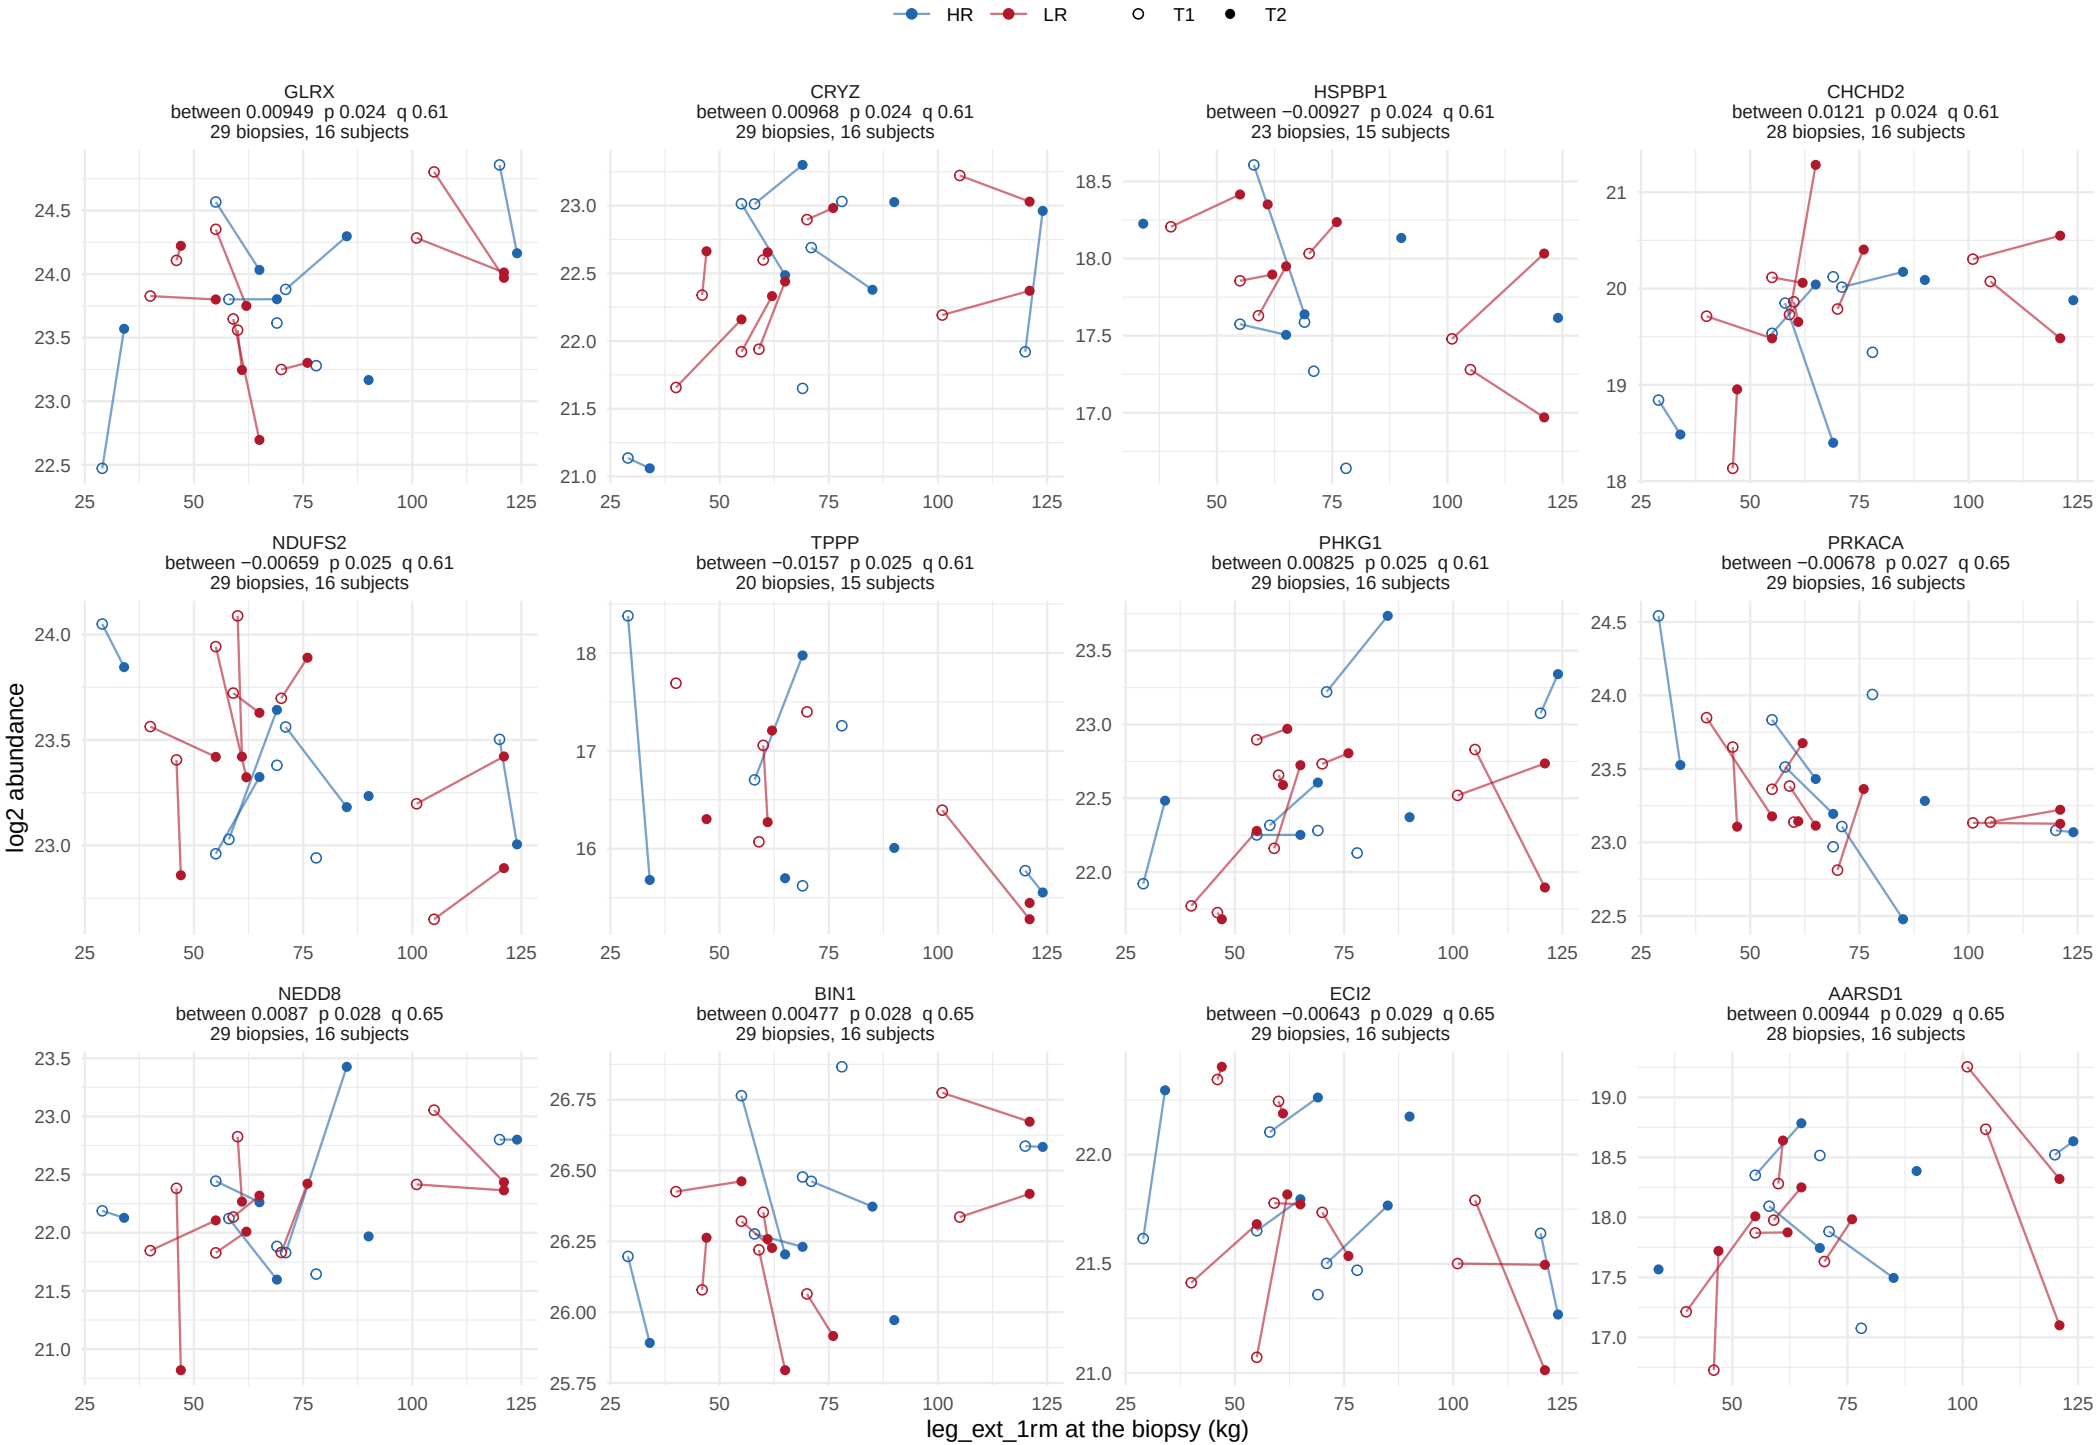

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_ext_1rm, between−person term


111 of 1615 proteins at p < 0.05, 0 at BH < 0.05. Page 7 of 10.

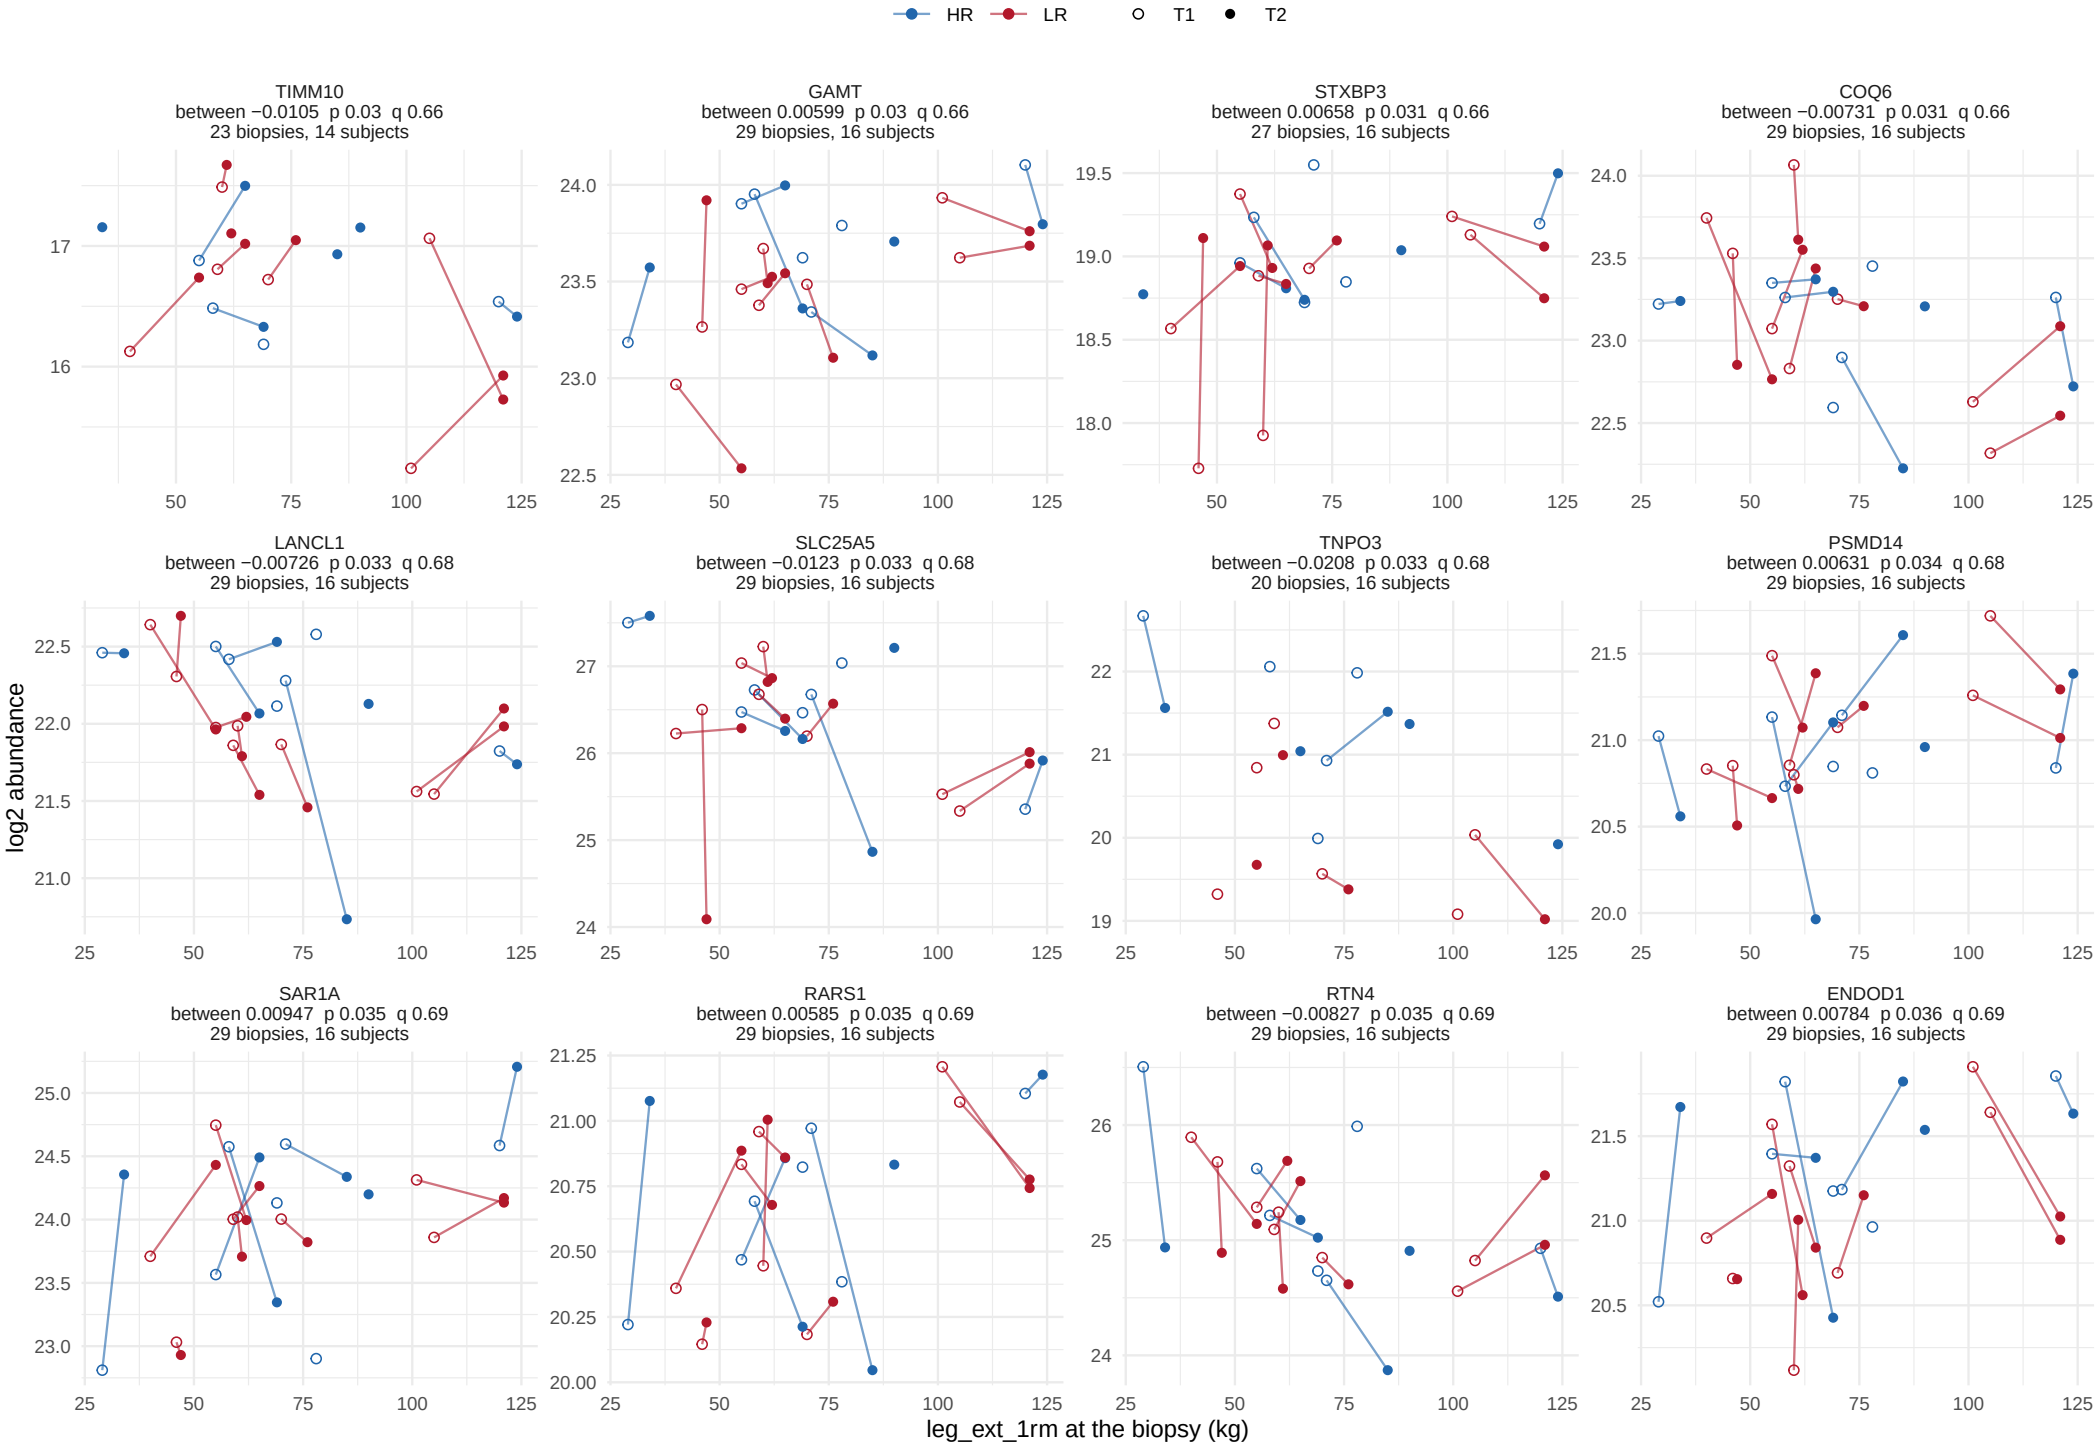

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_ext_1rm, between−person term


111 of 1615 proteins at p < 0.05, 0 at BH < 0.05. Page 8 of 10.

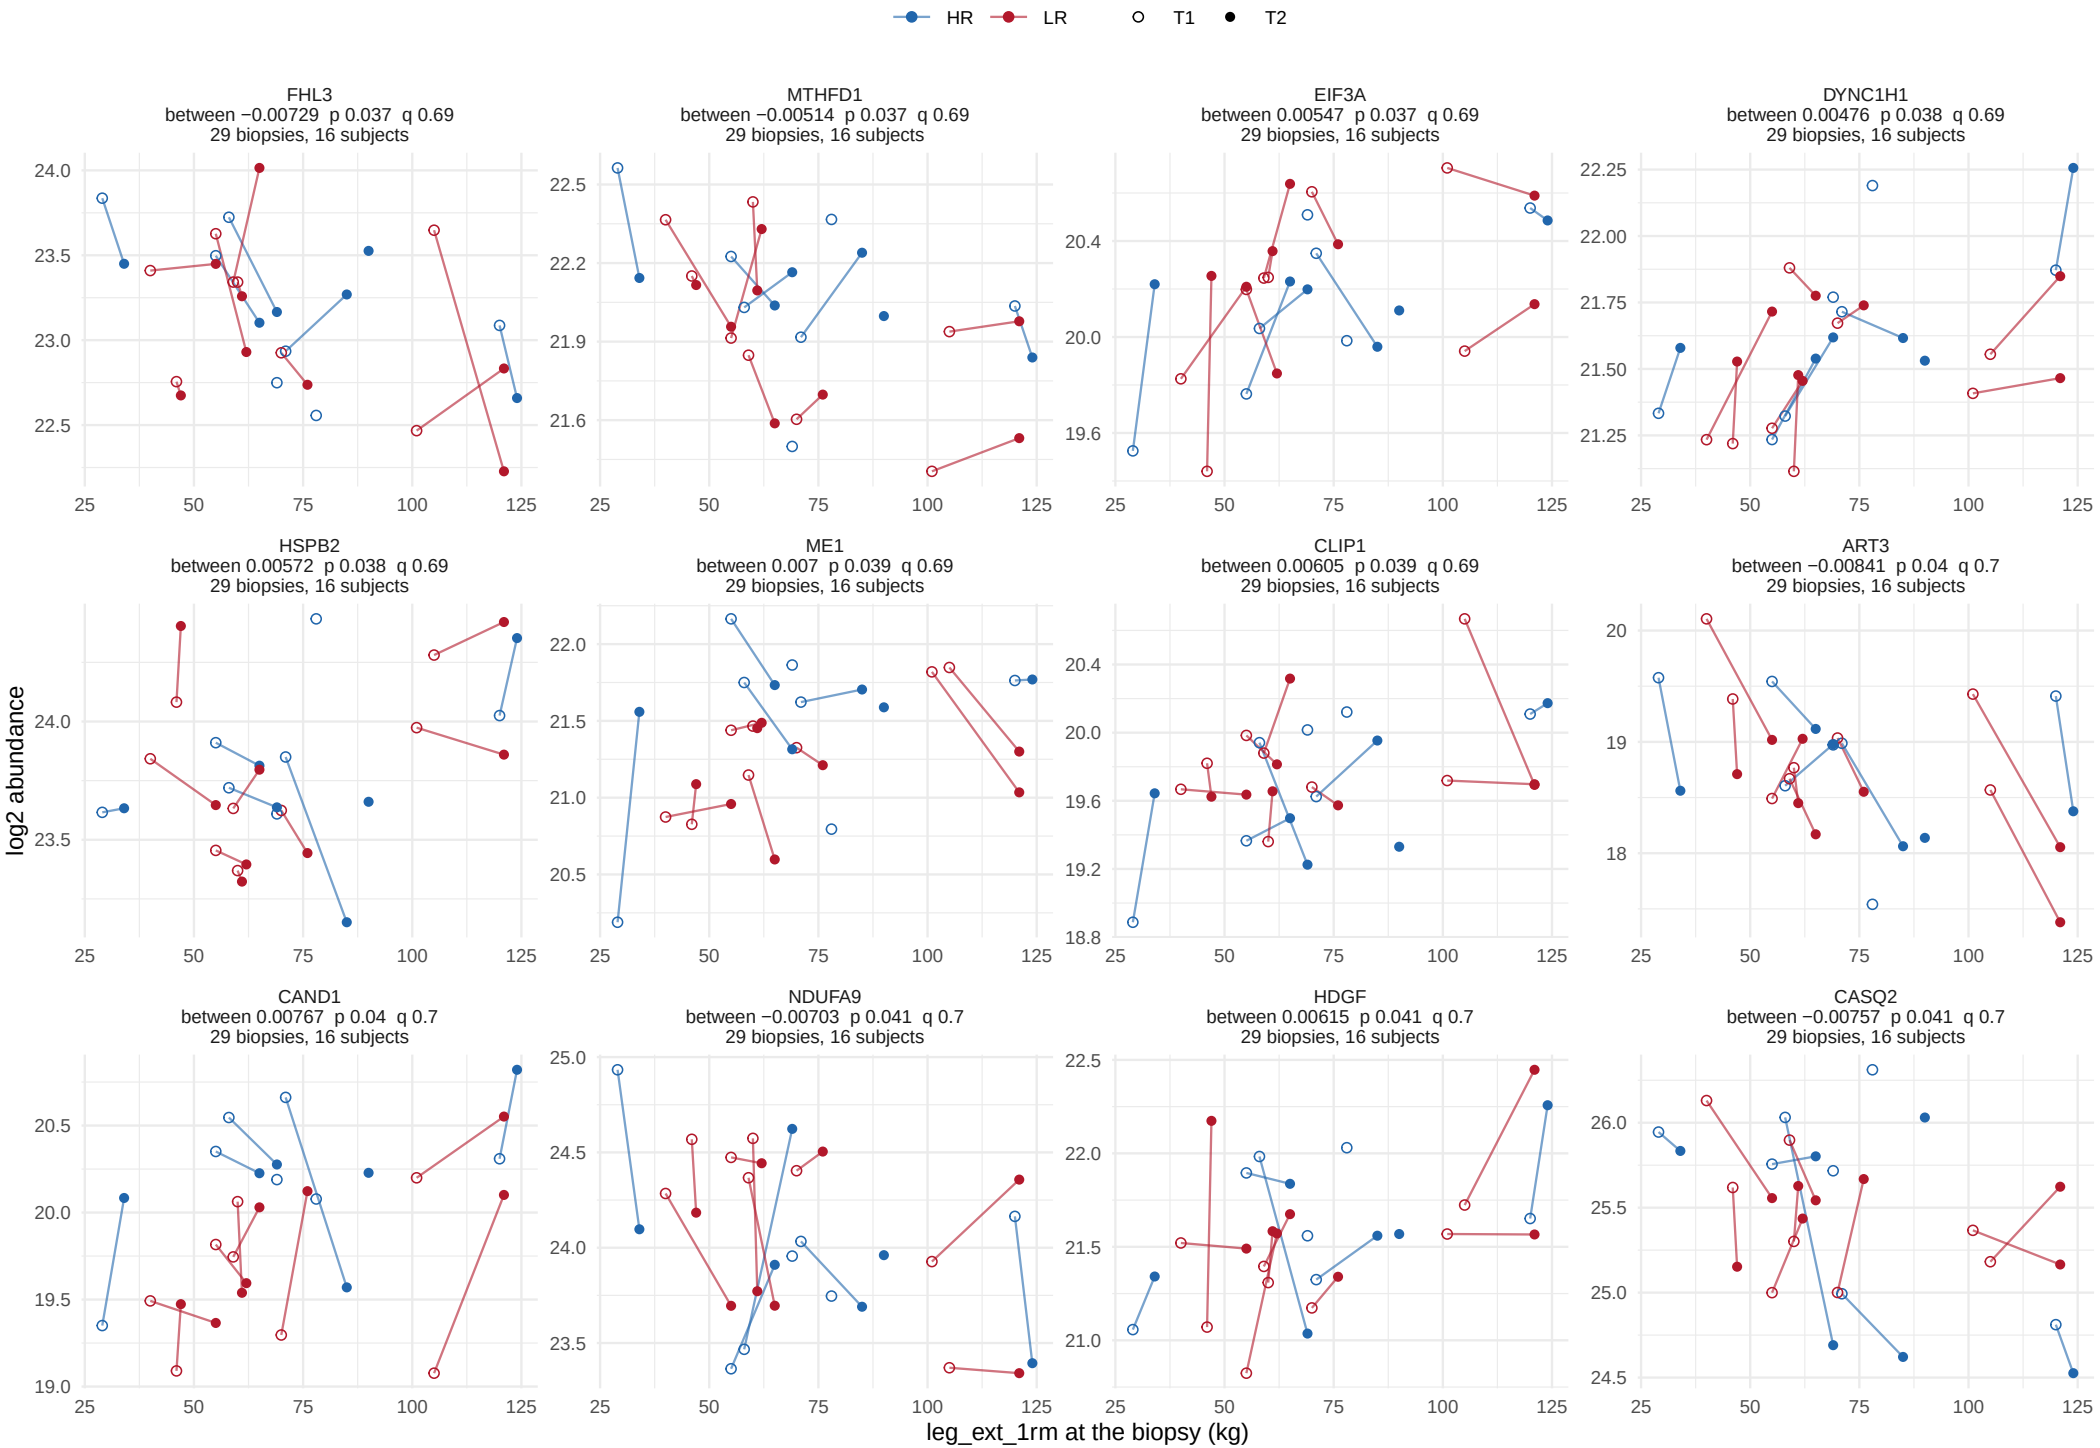

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_ext_1rm, between−person term


111 of 1615 proteins at p < 0.05, 0 at BH < 0.05. Page 9 of 10.

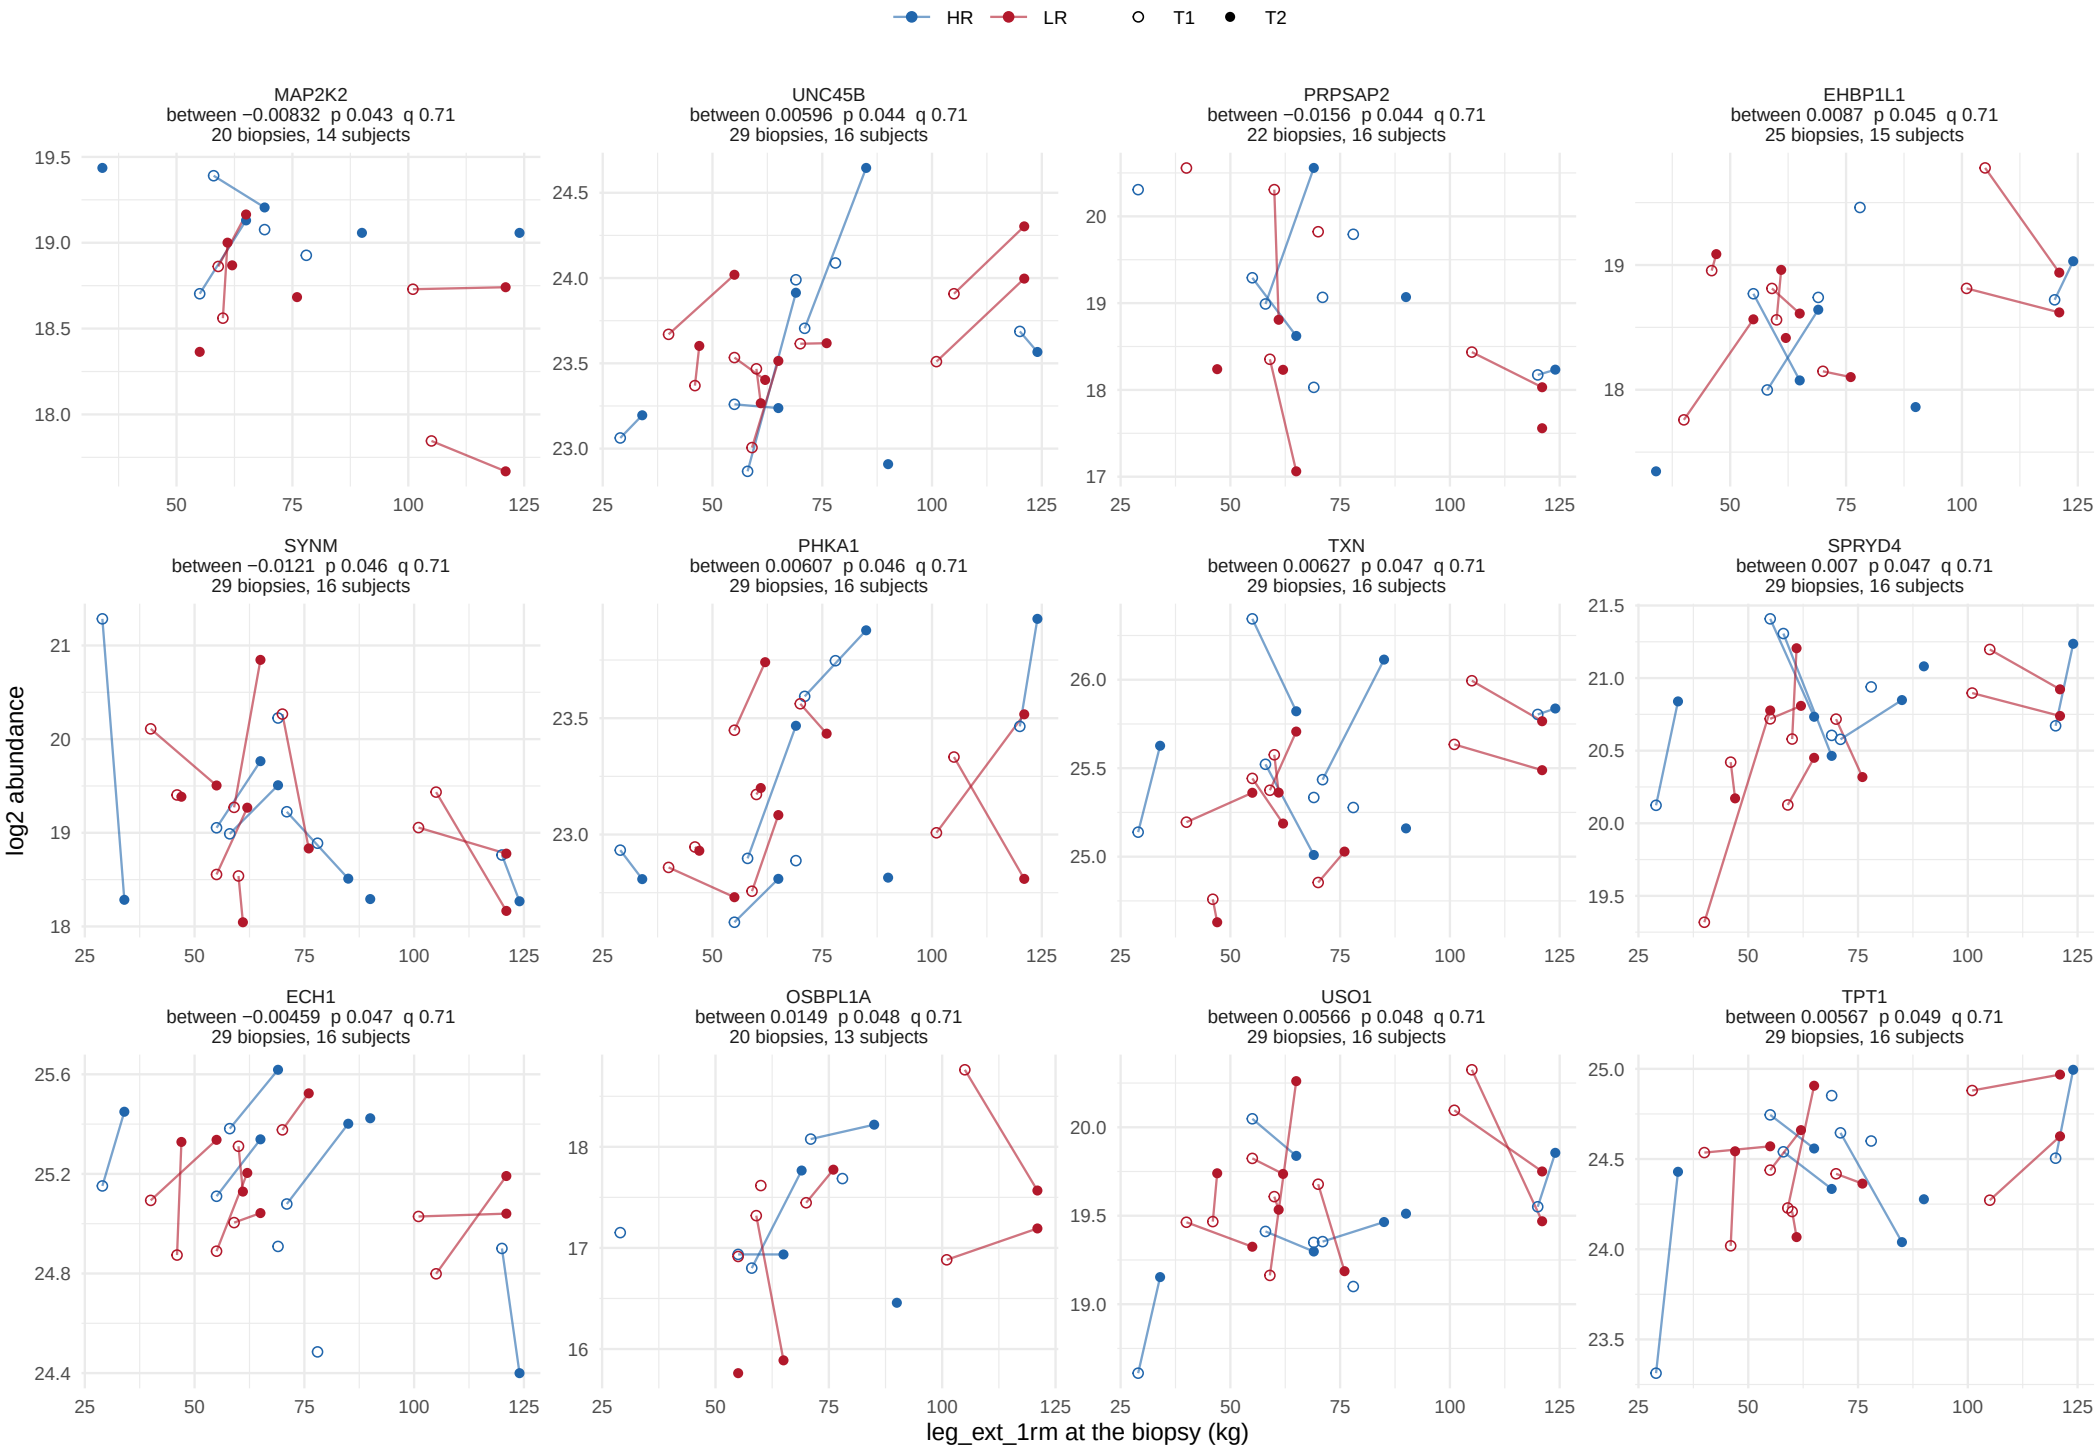

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

leg_ext_1rm, between−person term


111 of 1615 proteins at p < 0.05, 0 at BH < 0.05. Page 10 of 10.

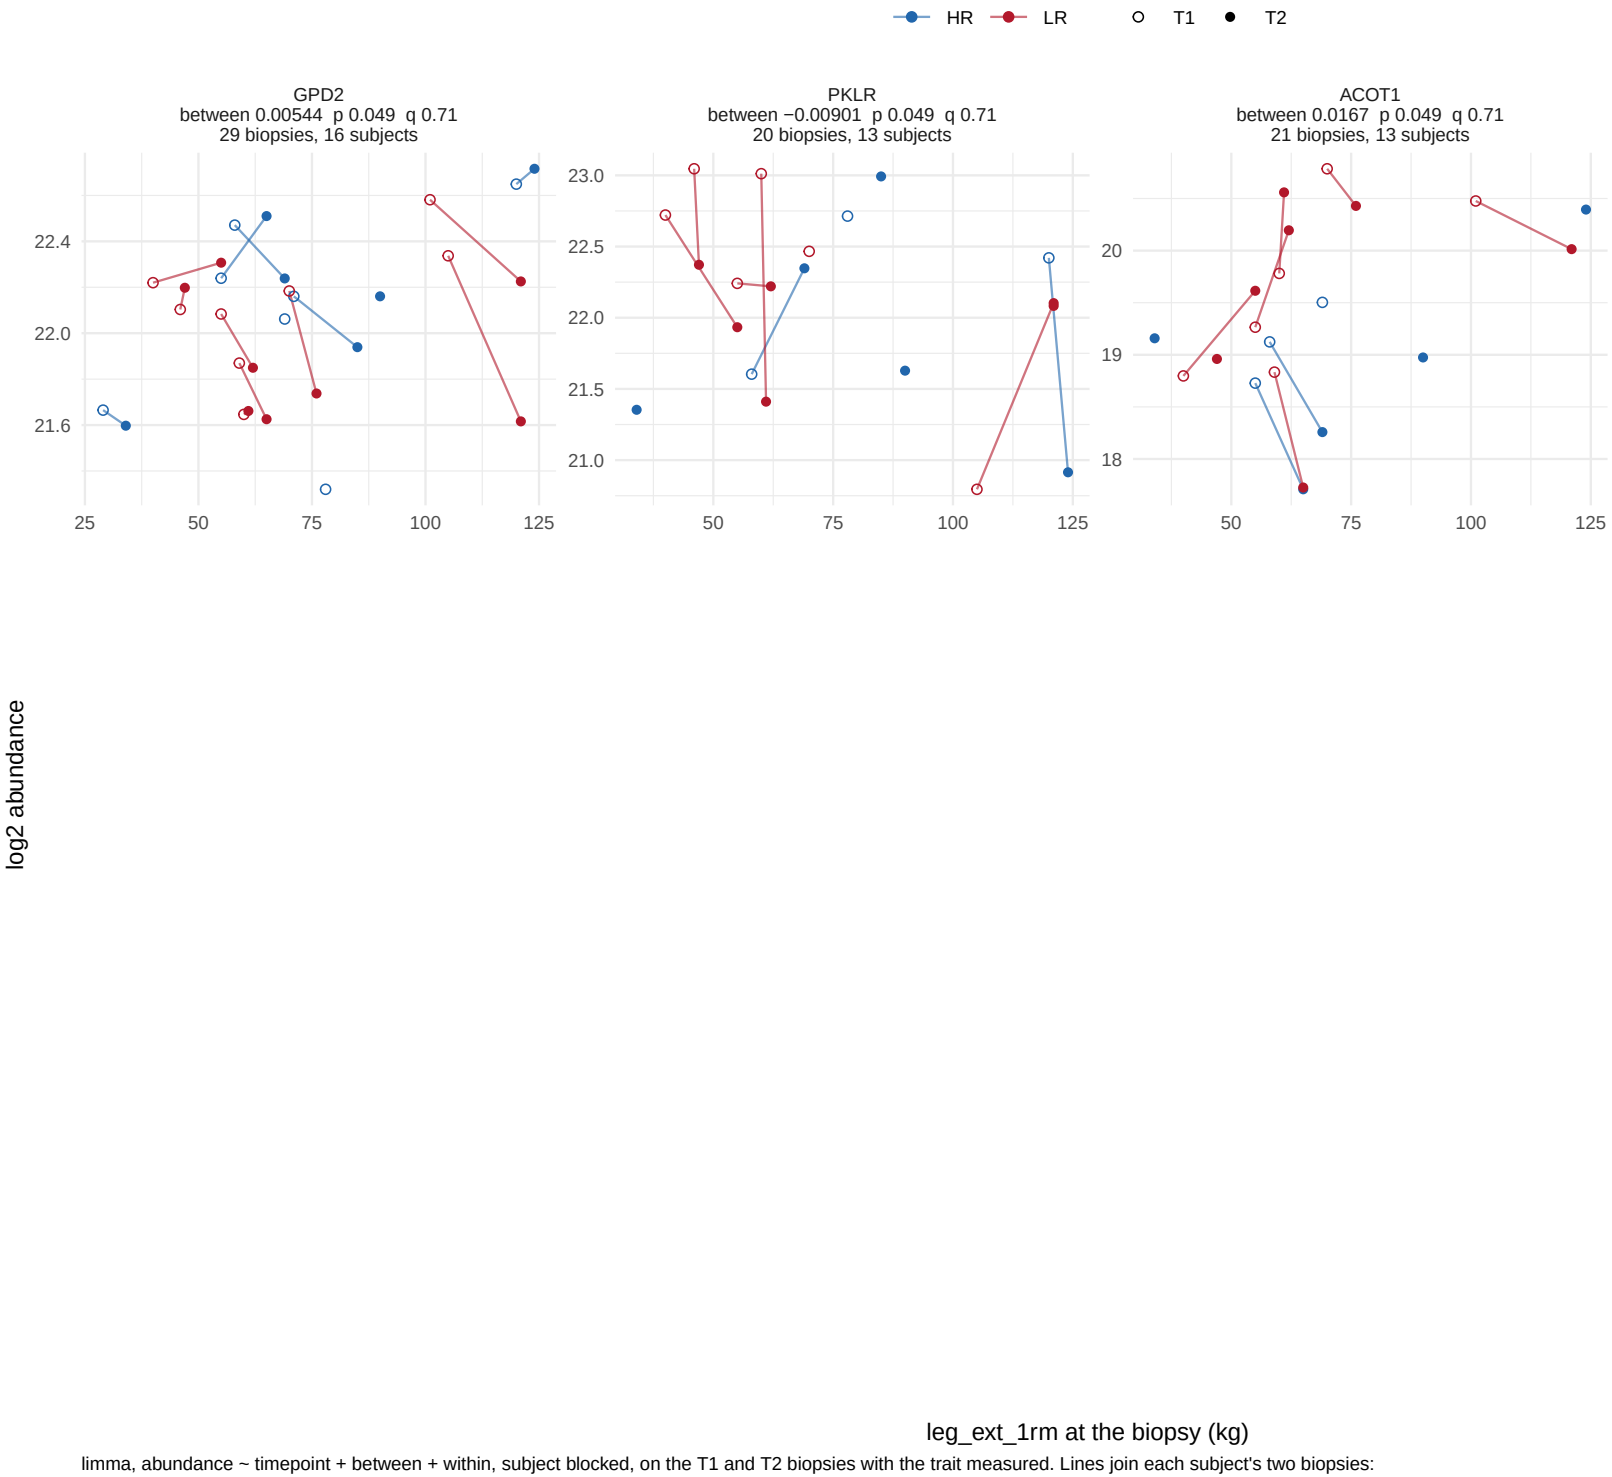

limma, abundance ~ timepoint + between + within, subject blocked, on the T1 and T2 biopsies with the trait measured. Lines join each subject's two biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, BH q within trait and term, and the biopsies and subjects where the feature was observed. Table: c_data/04_associate.xlsx, model.

Change score, training window


467 of 11286 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 1 of 39.

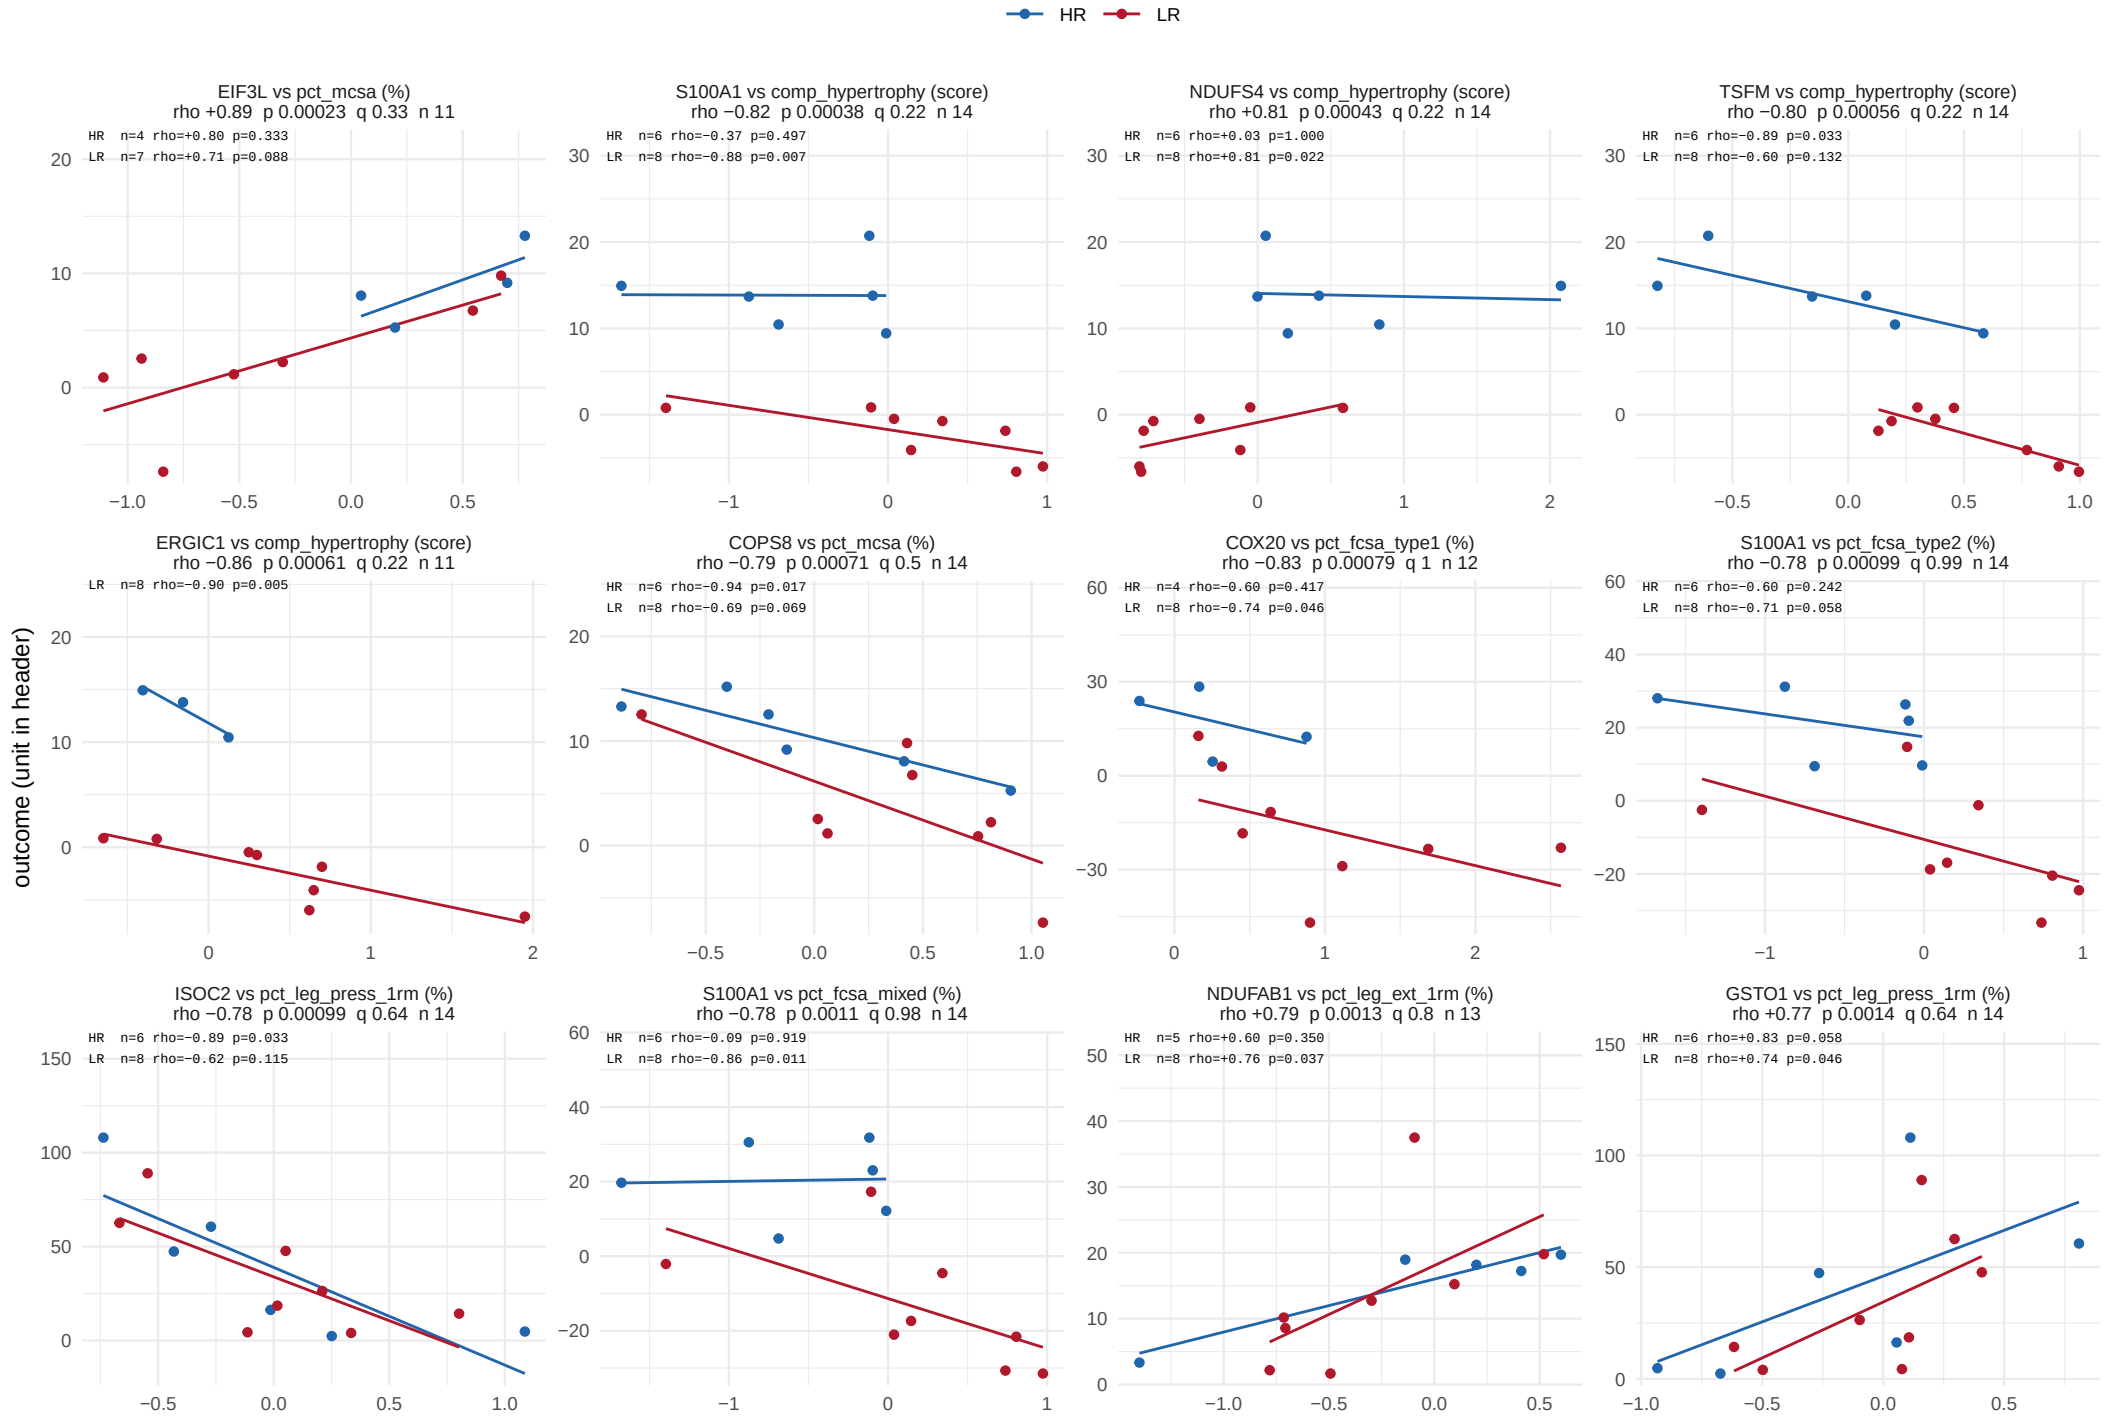

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


467 of 11286 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 2 of 39.

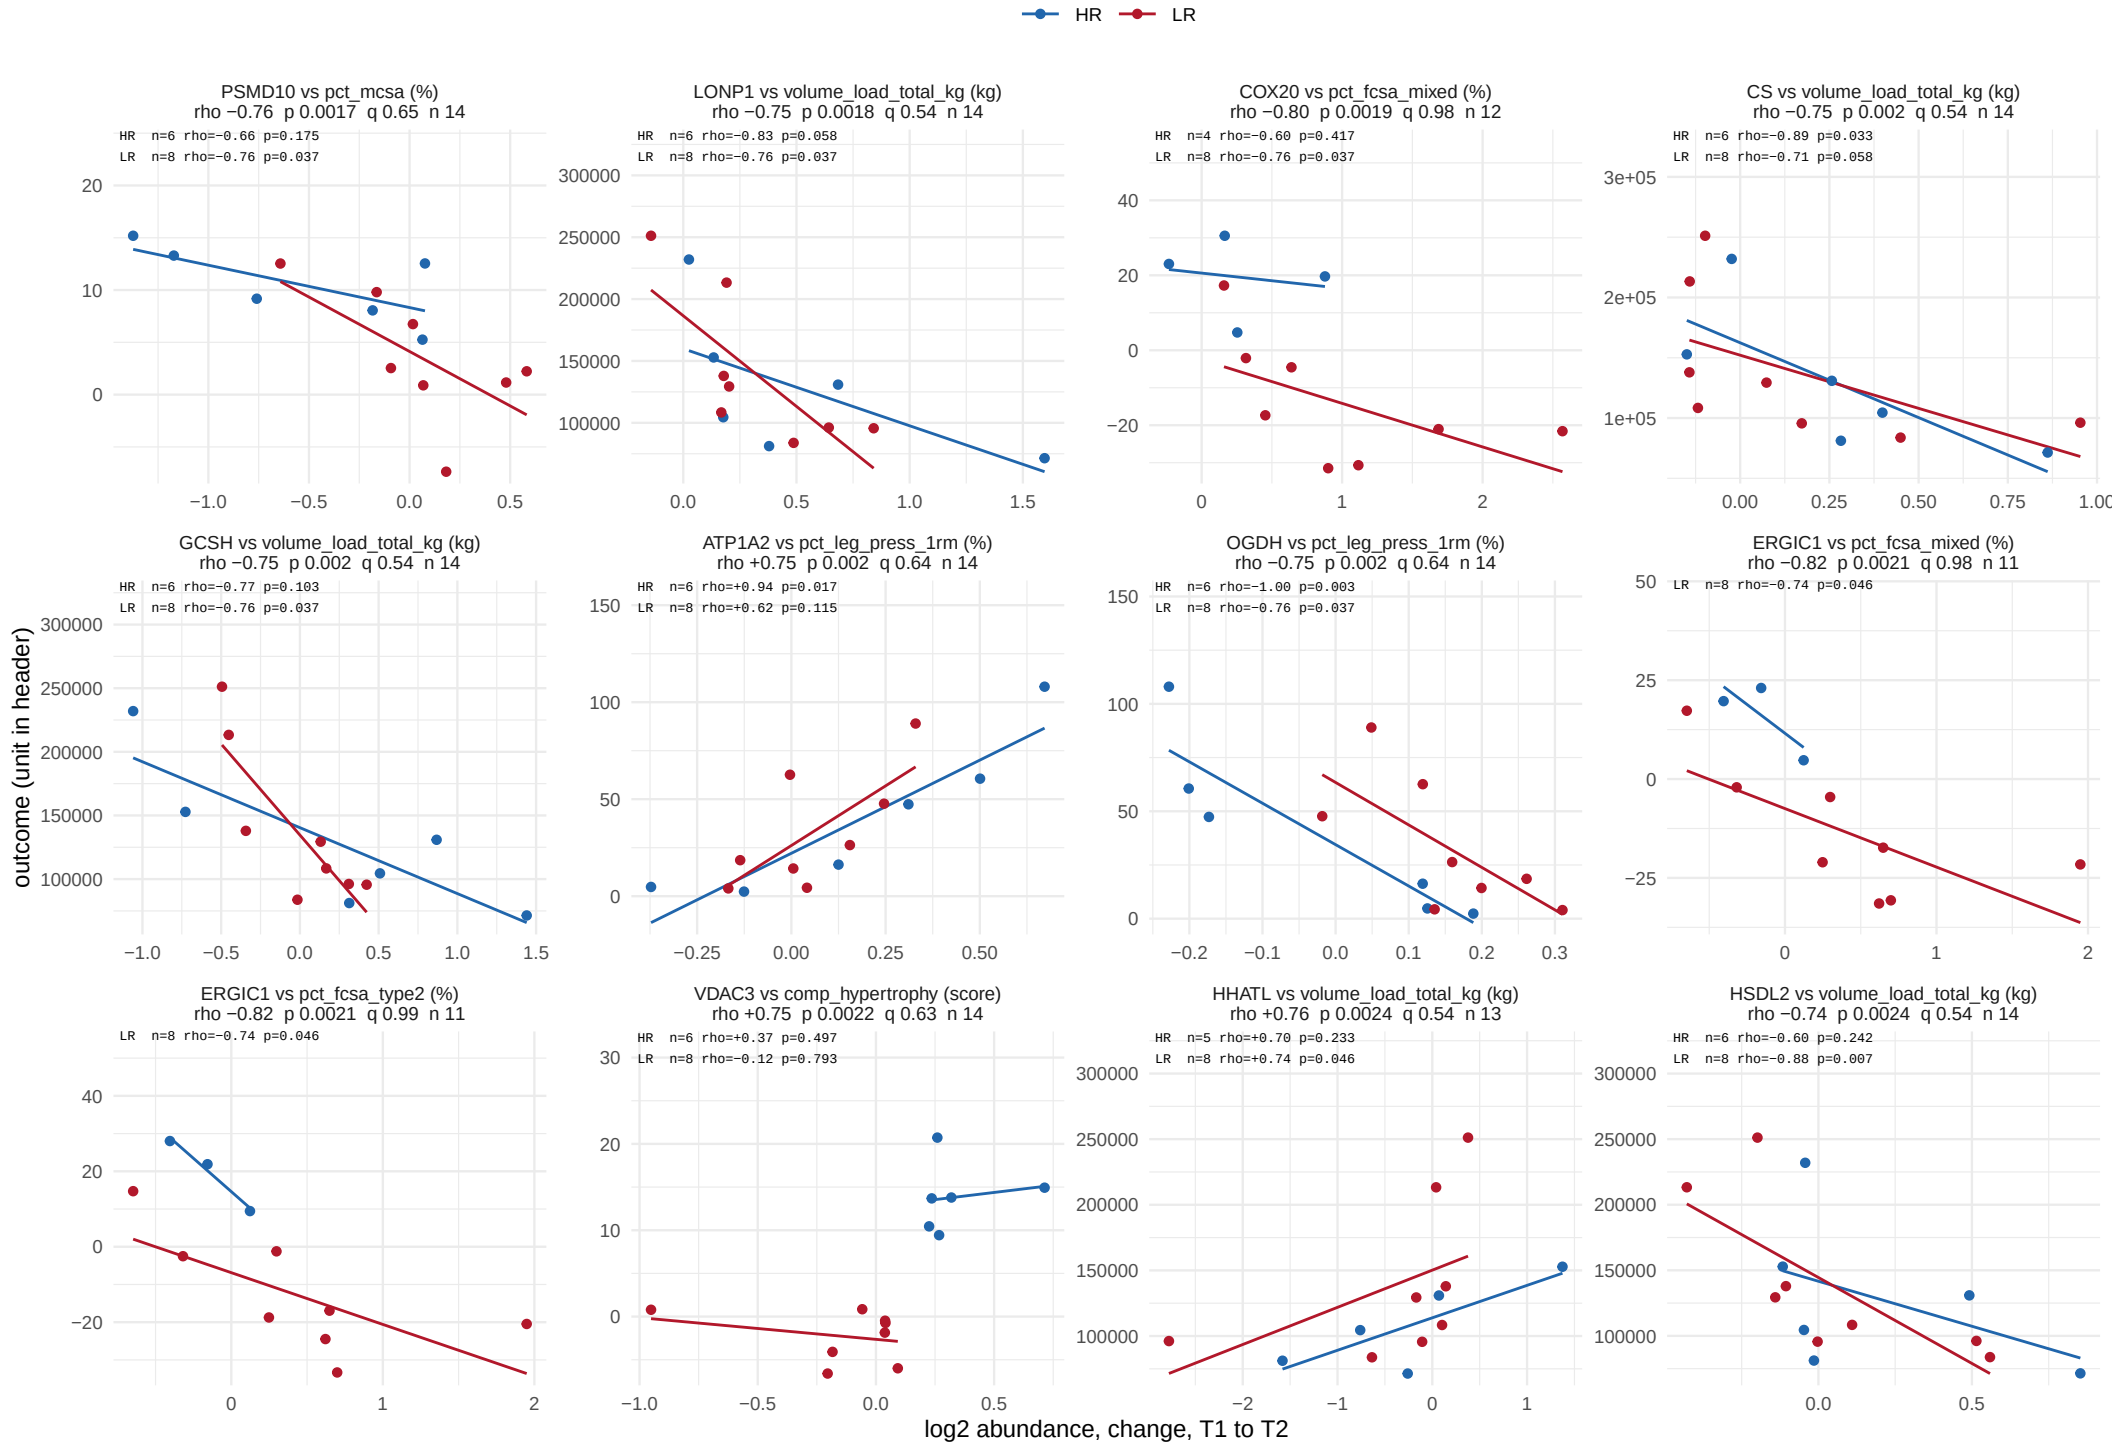

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window

467 of 11286 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 3 of 39.

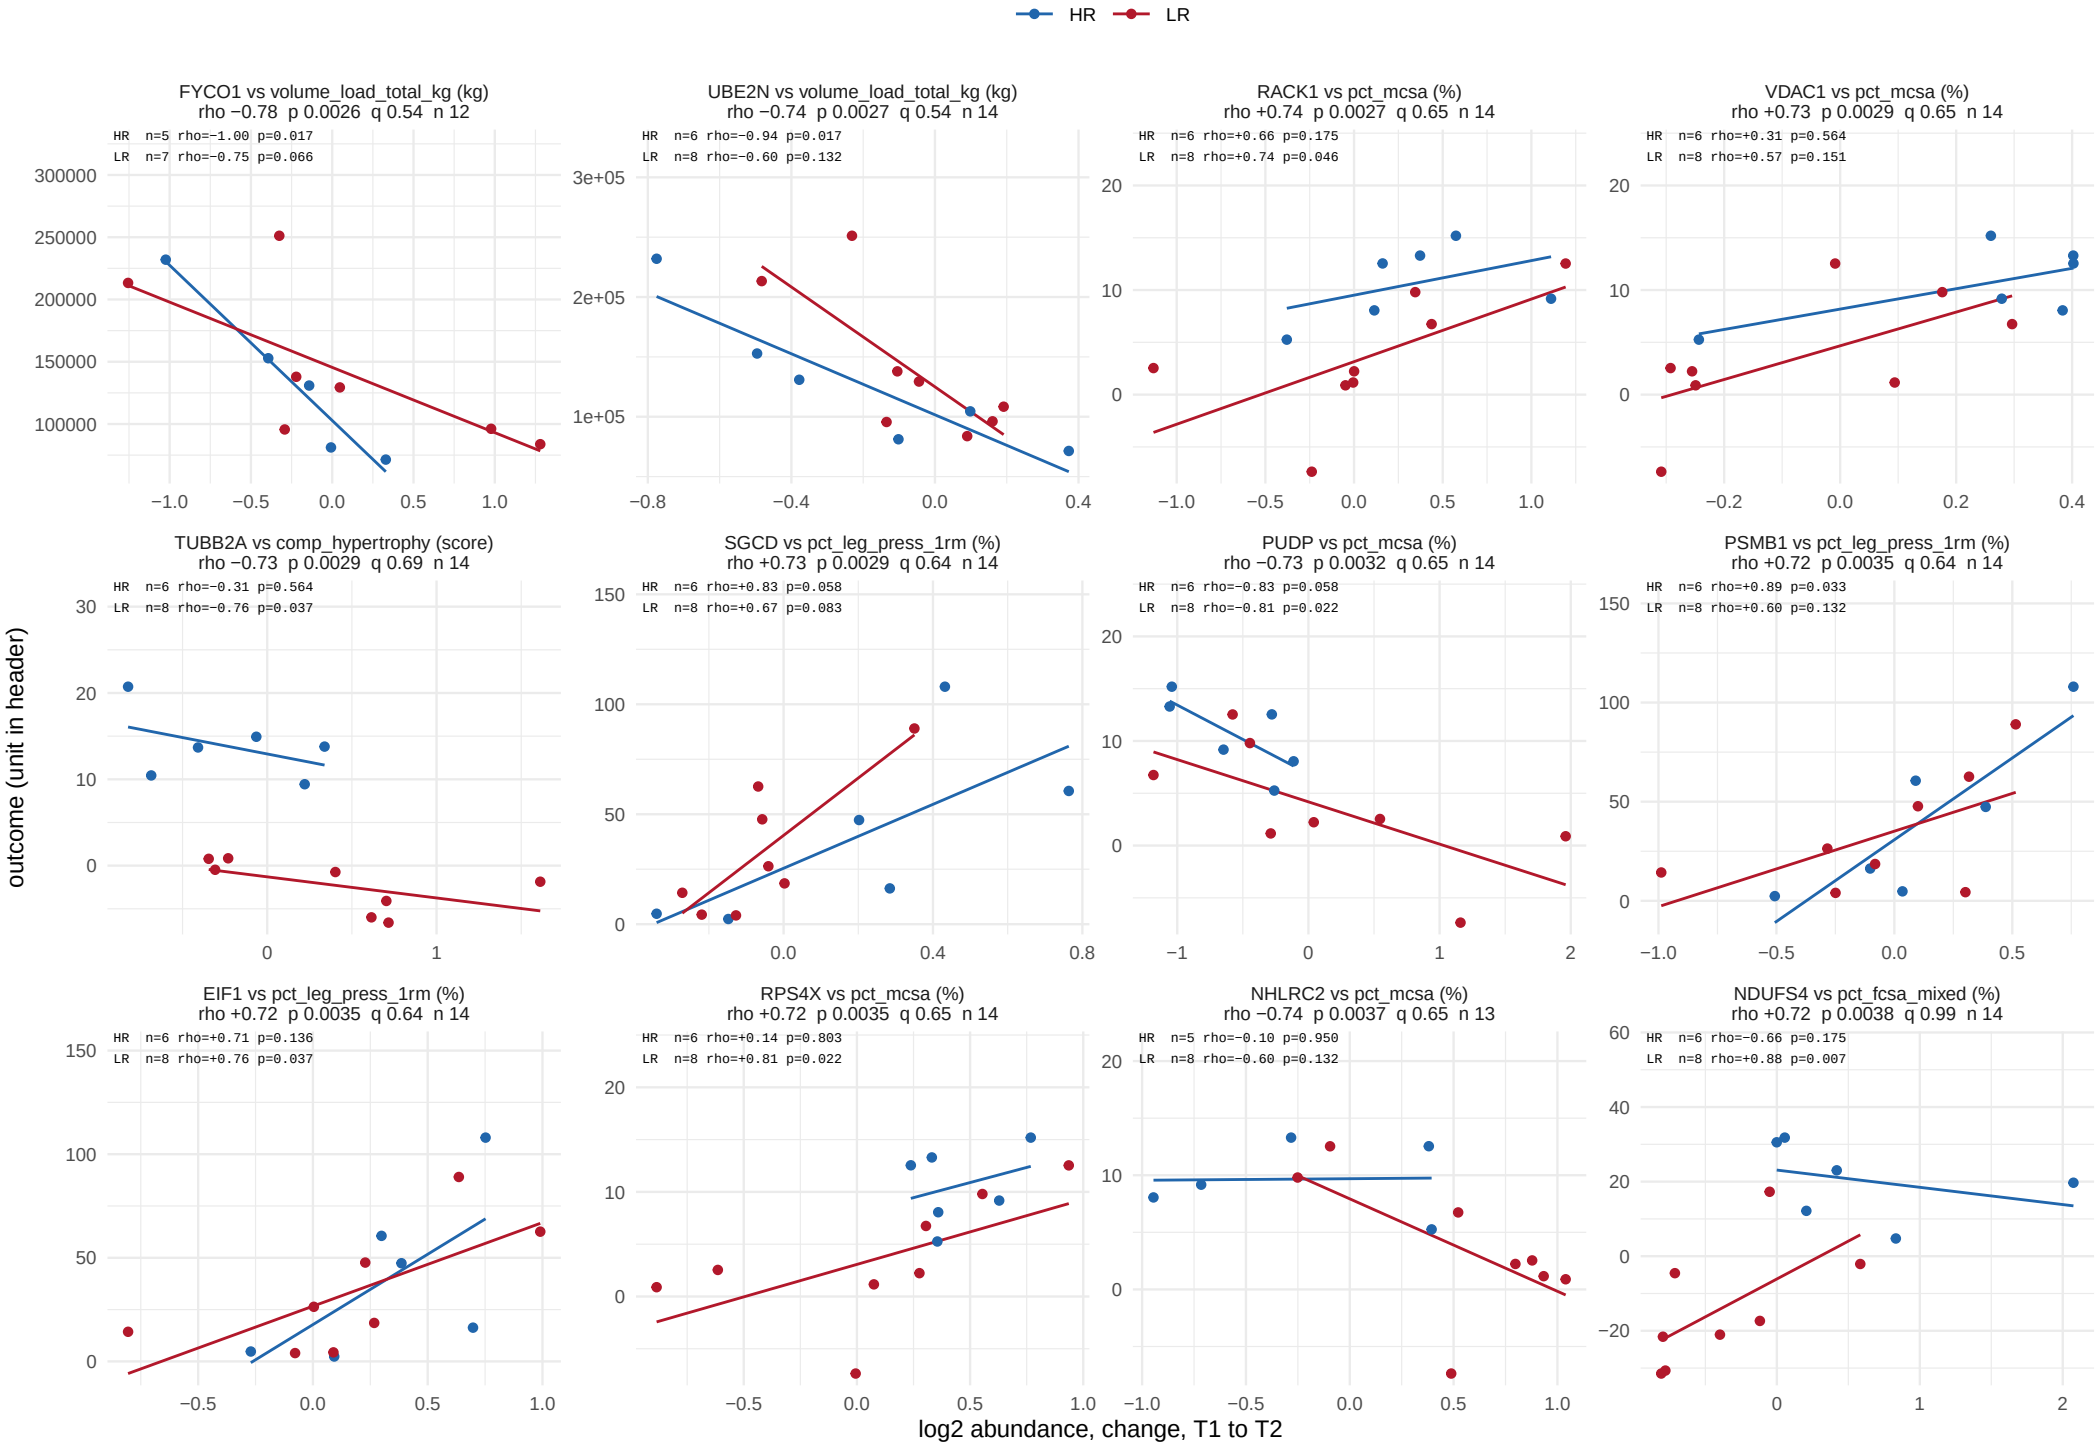

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


467 of 11286 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 4 of 39.



One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window

467 of 11286 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 5 of 39.

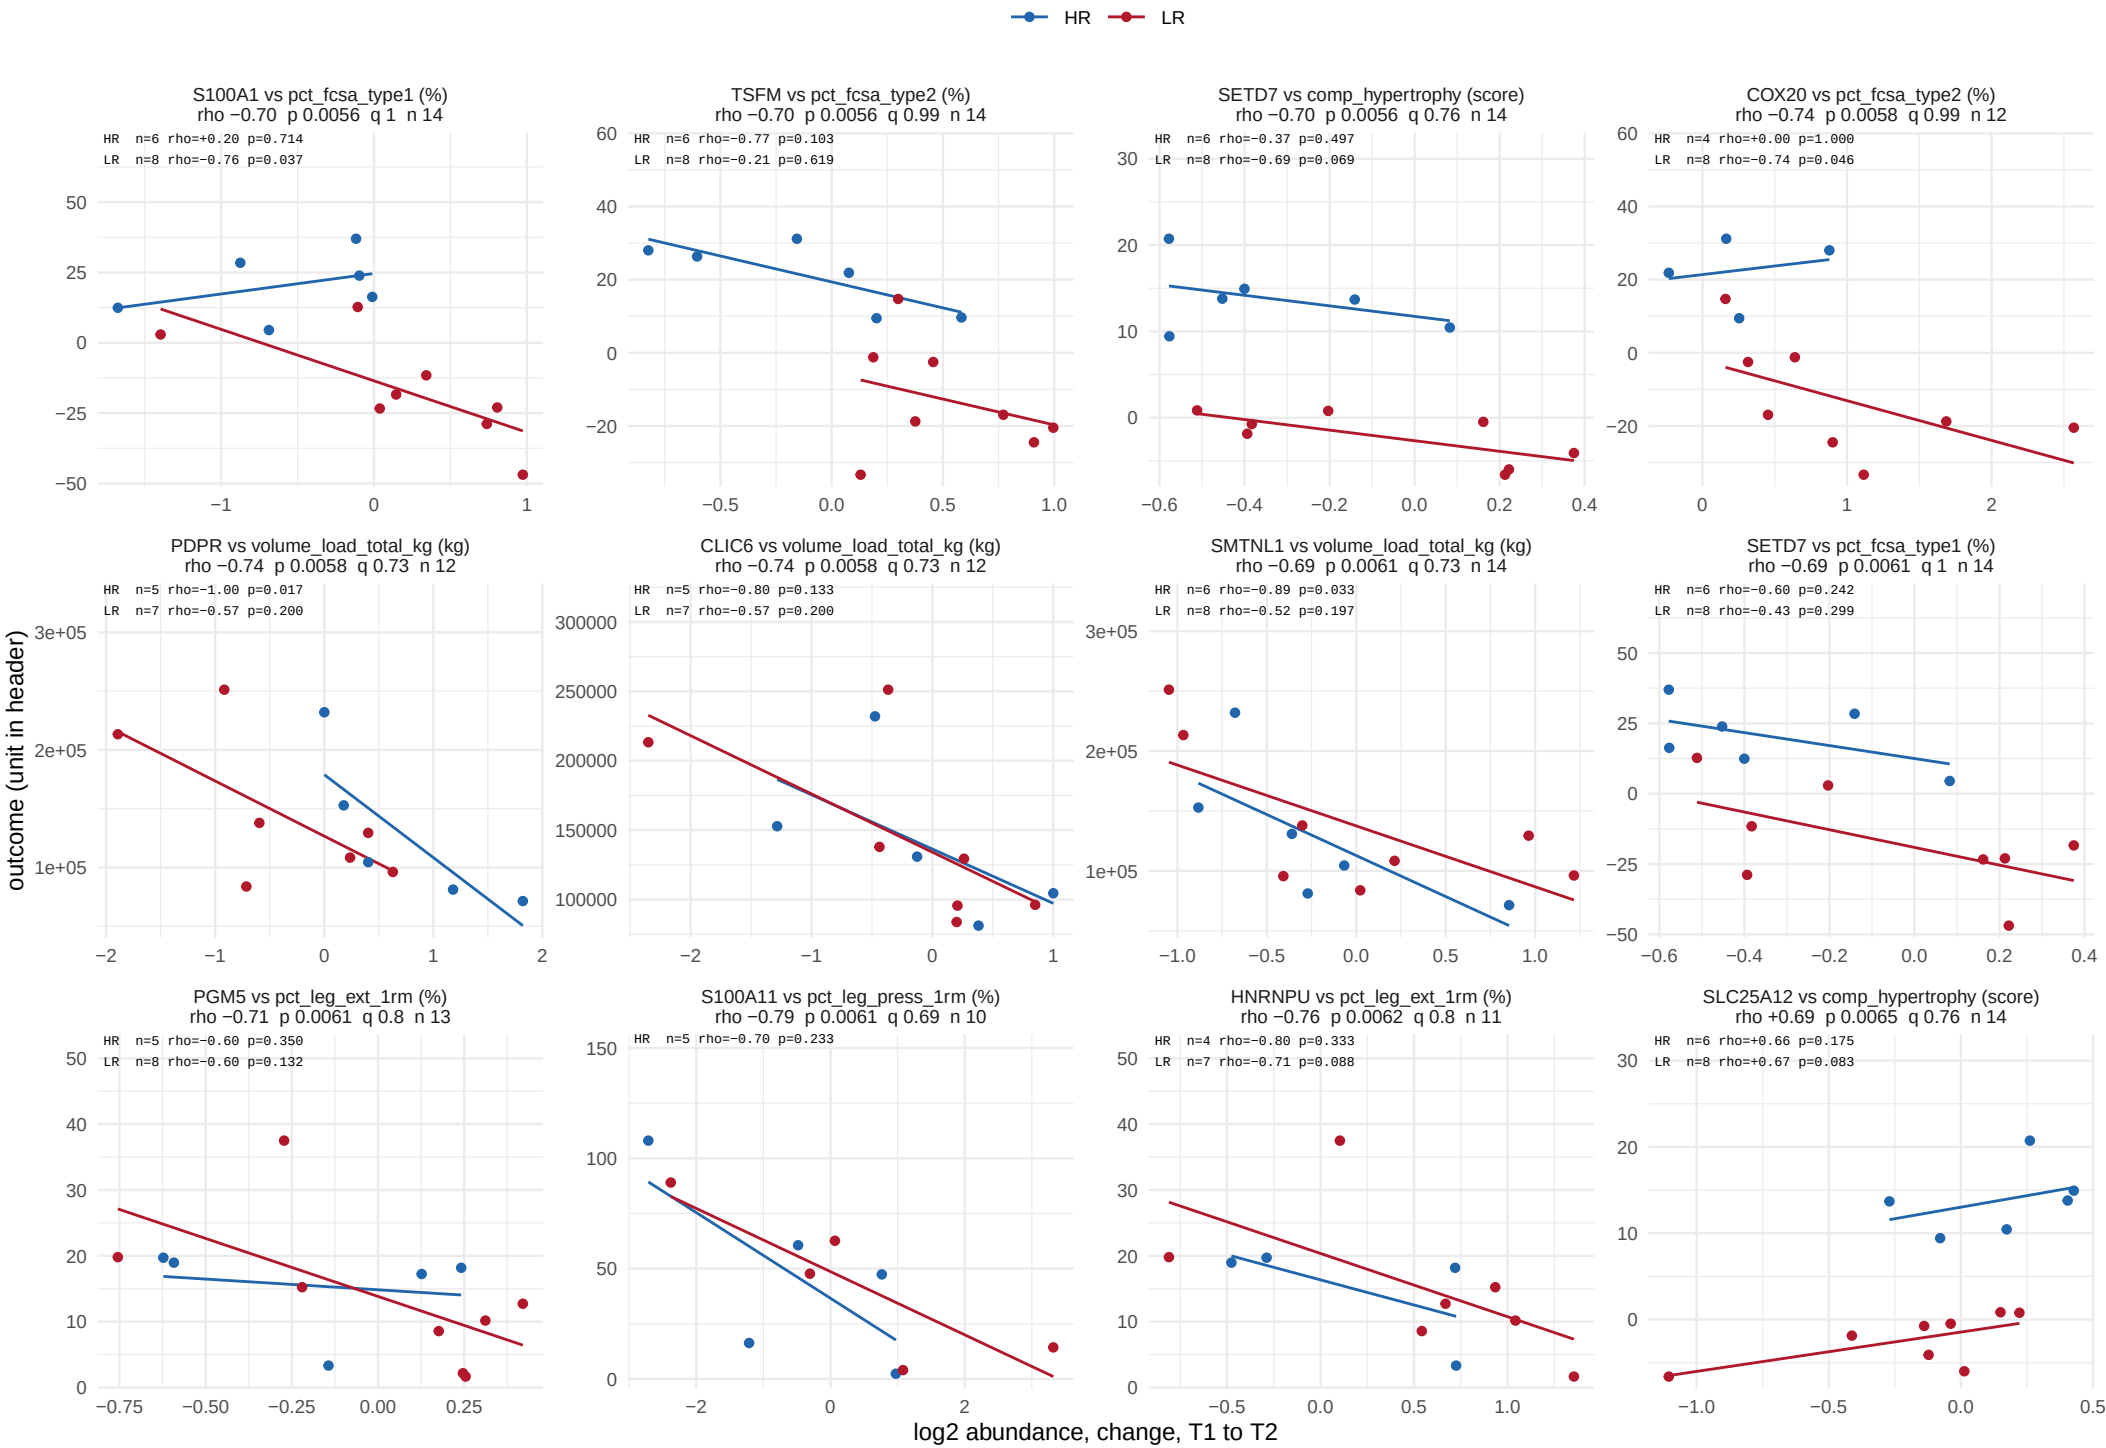

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


467 of 11286 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 6 of 39.



One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


467 of 11286 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 7 of 39.

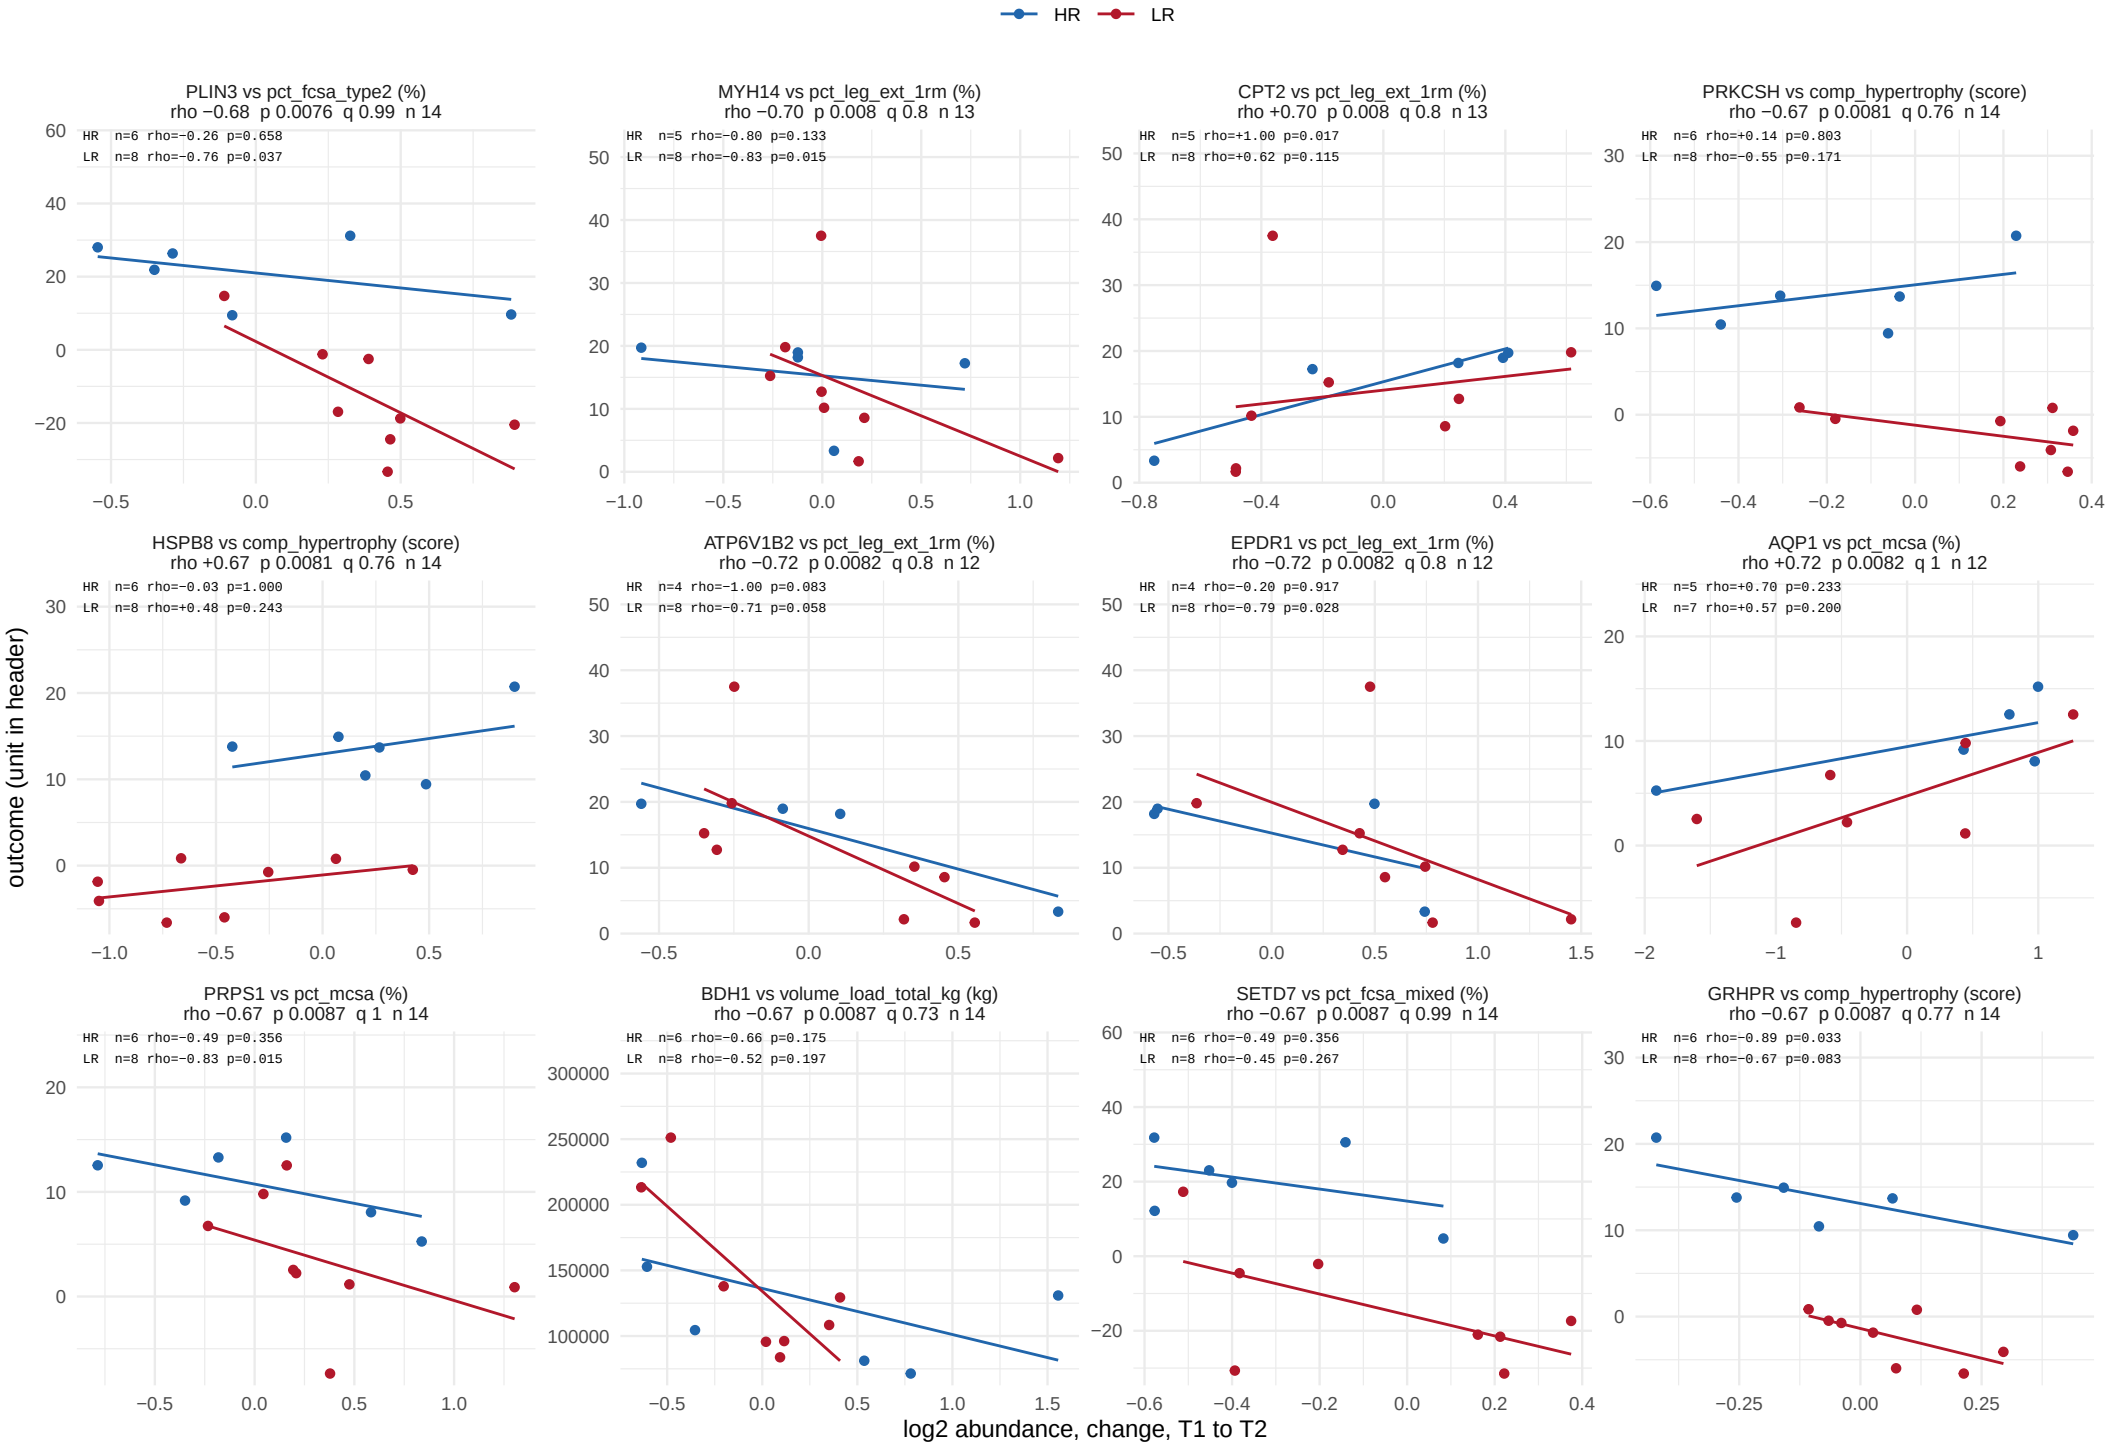

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


467 of 11286 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 8 of 39.

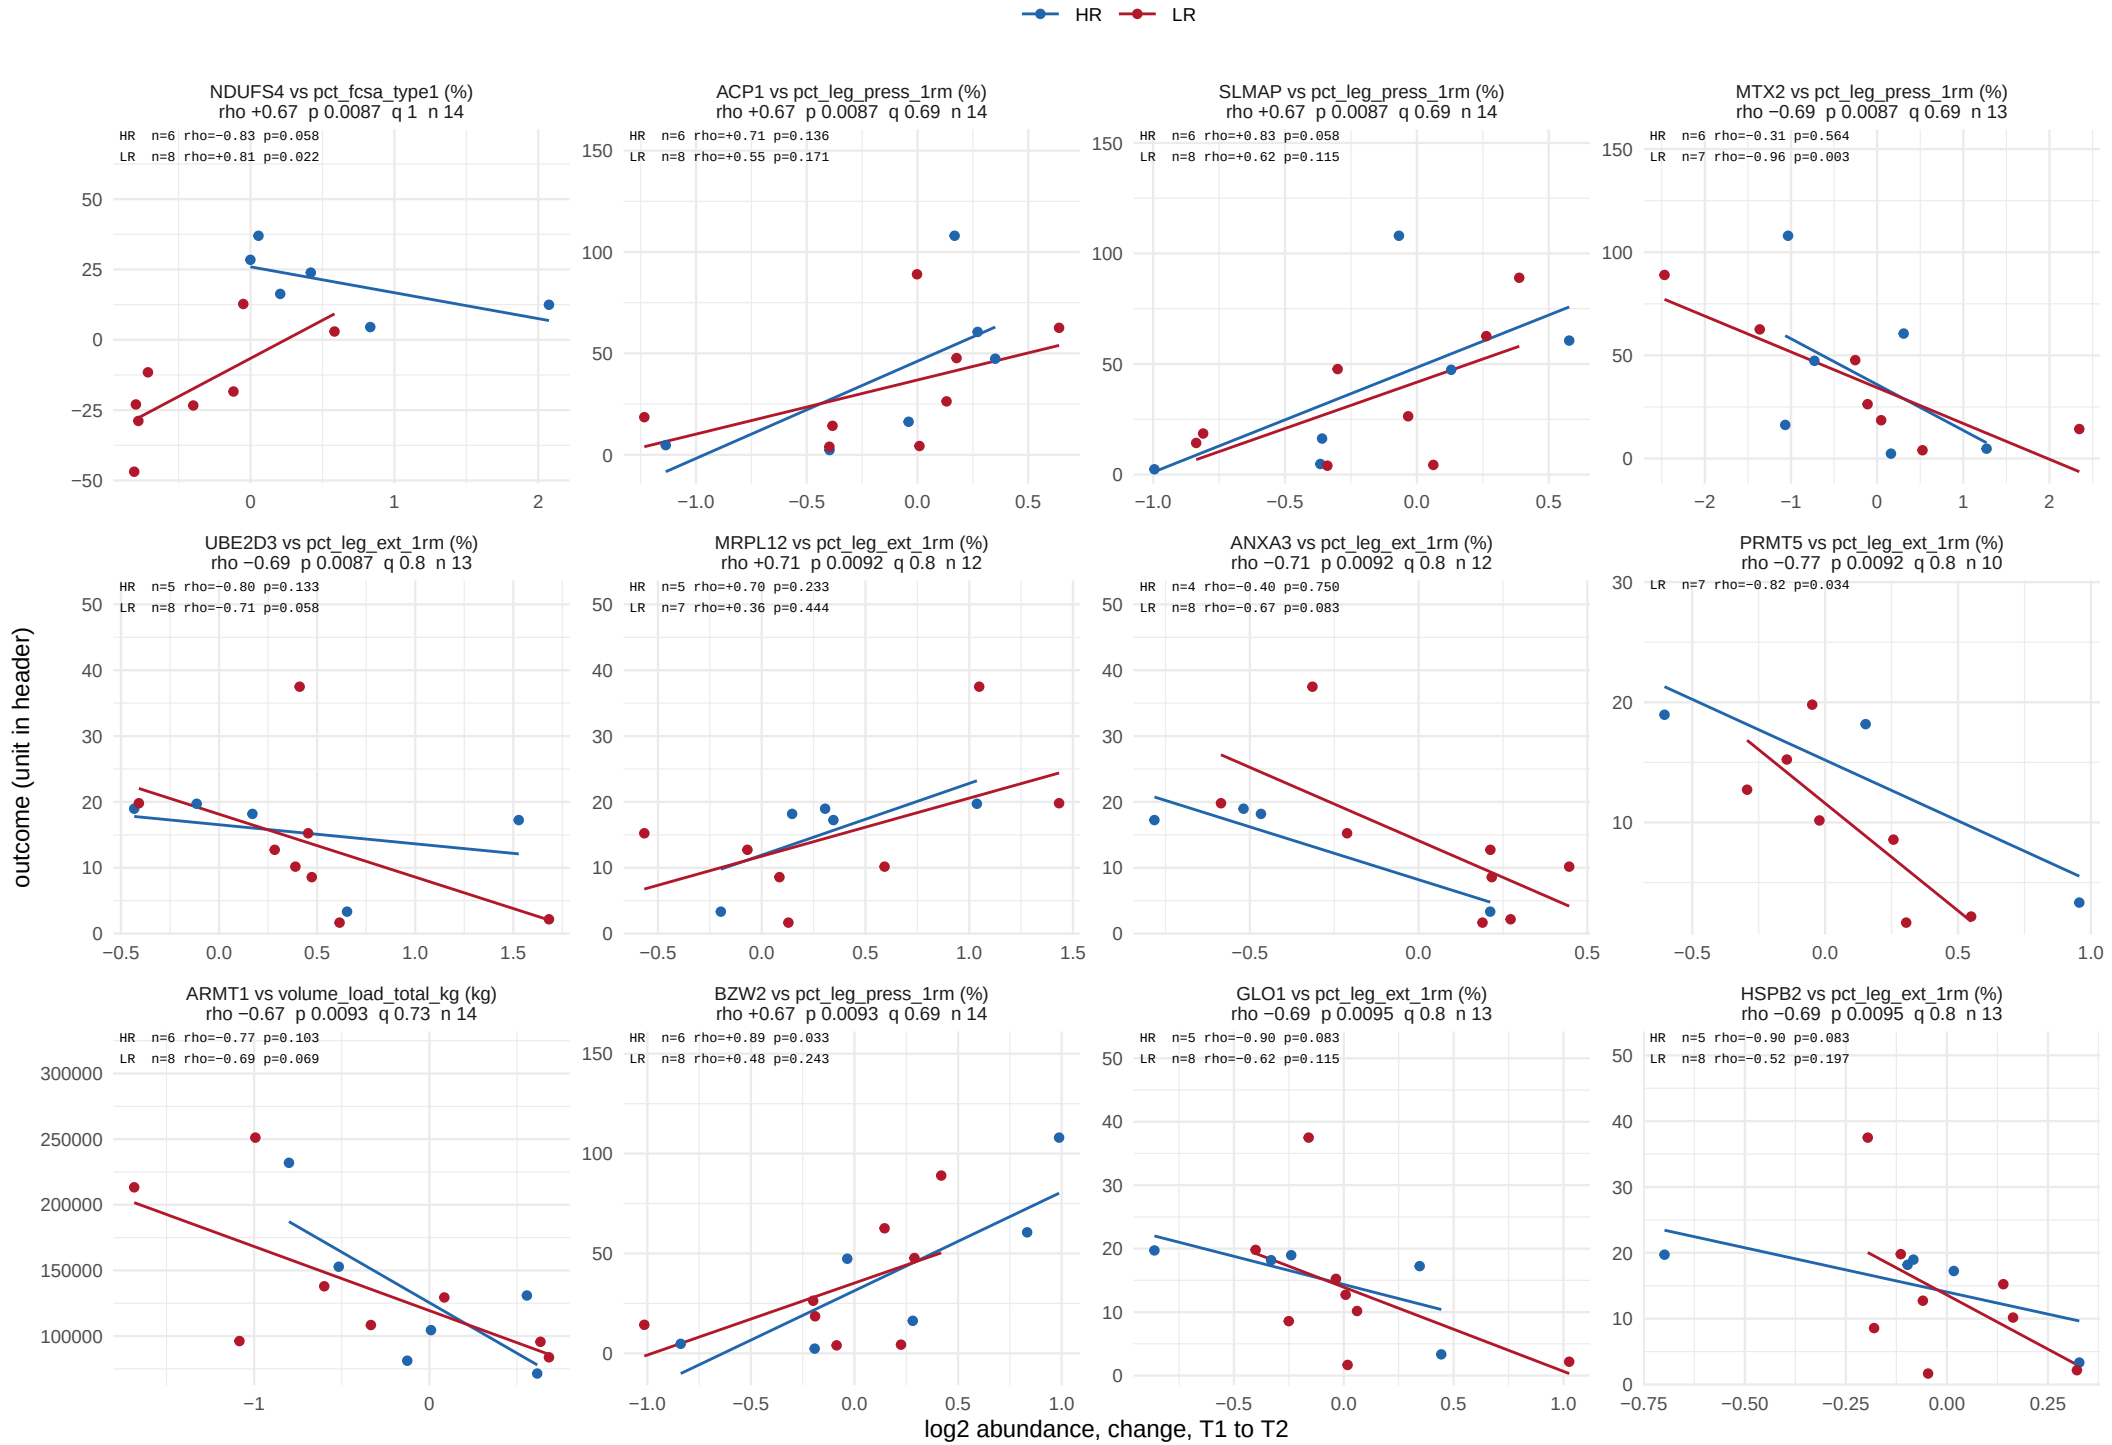

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


467 of 11286 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 9 of 39.

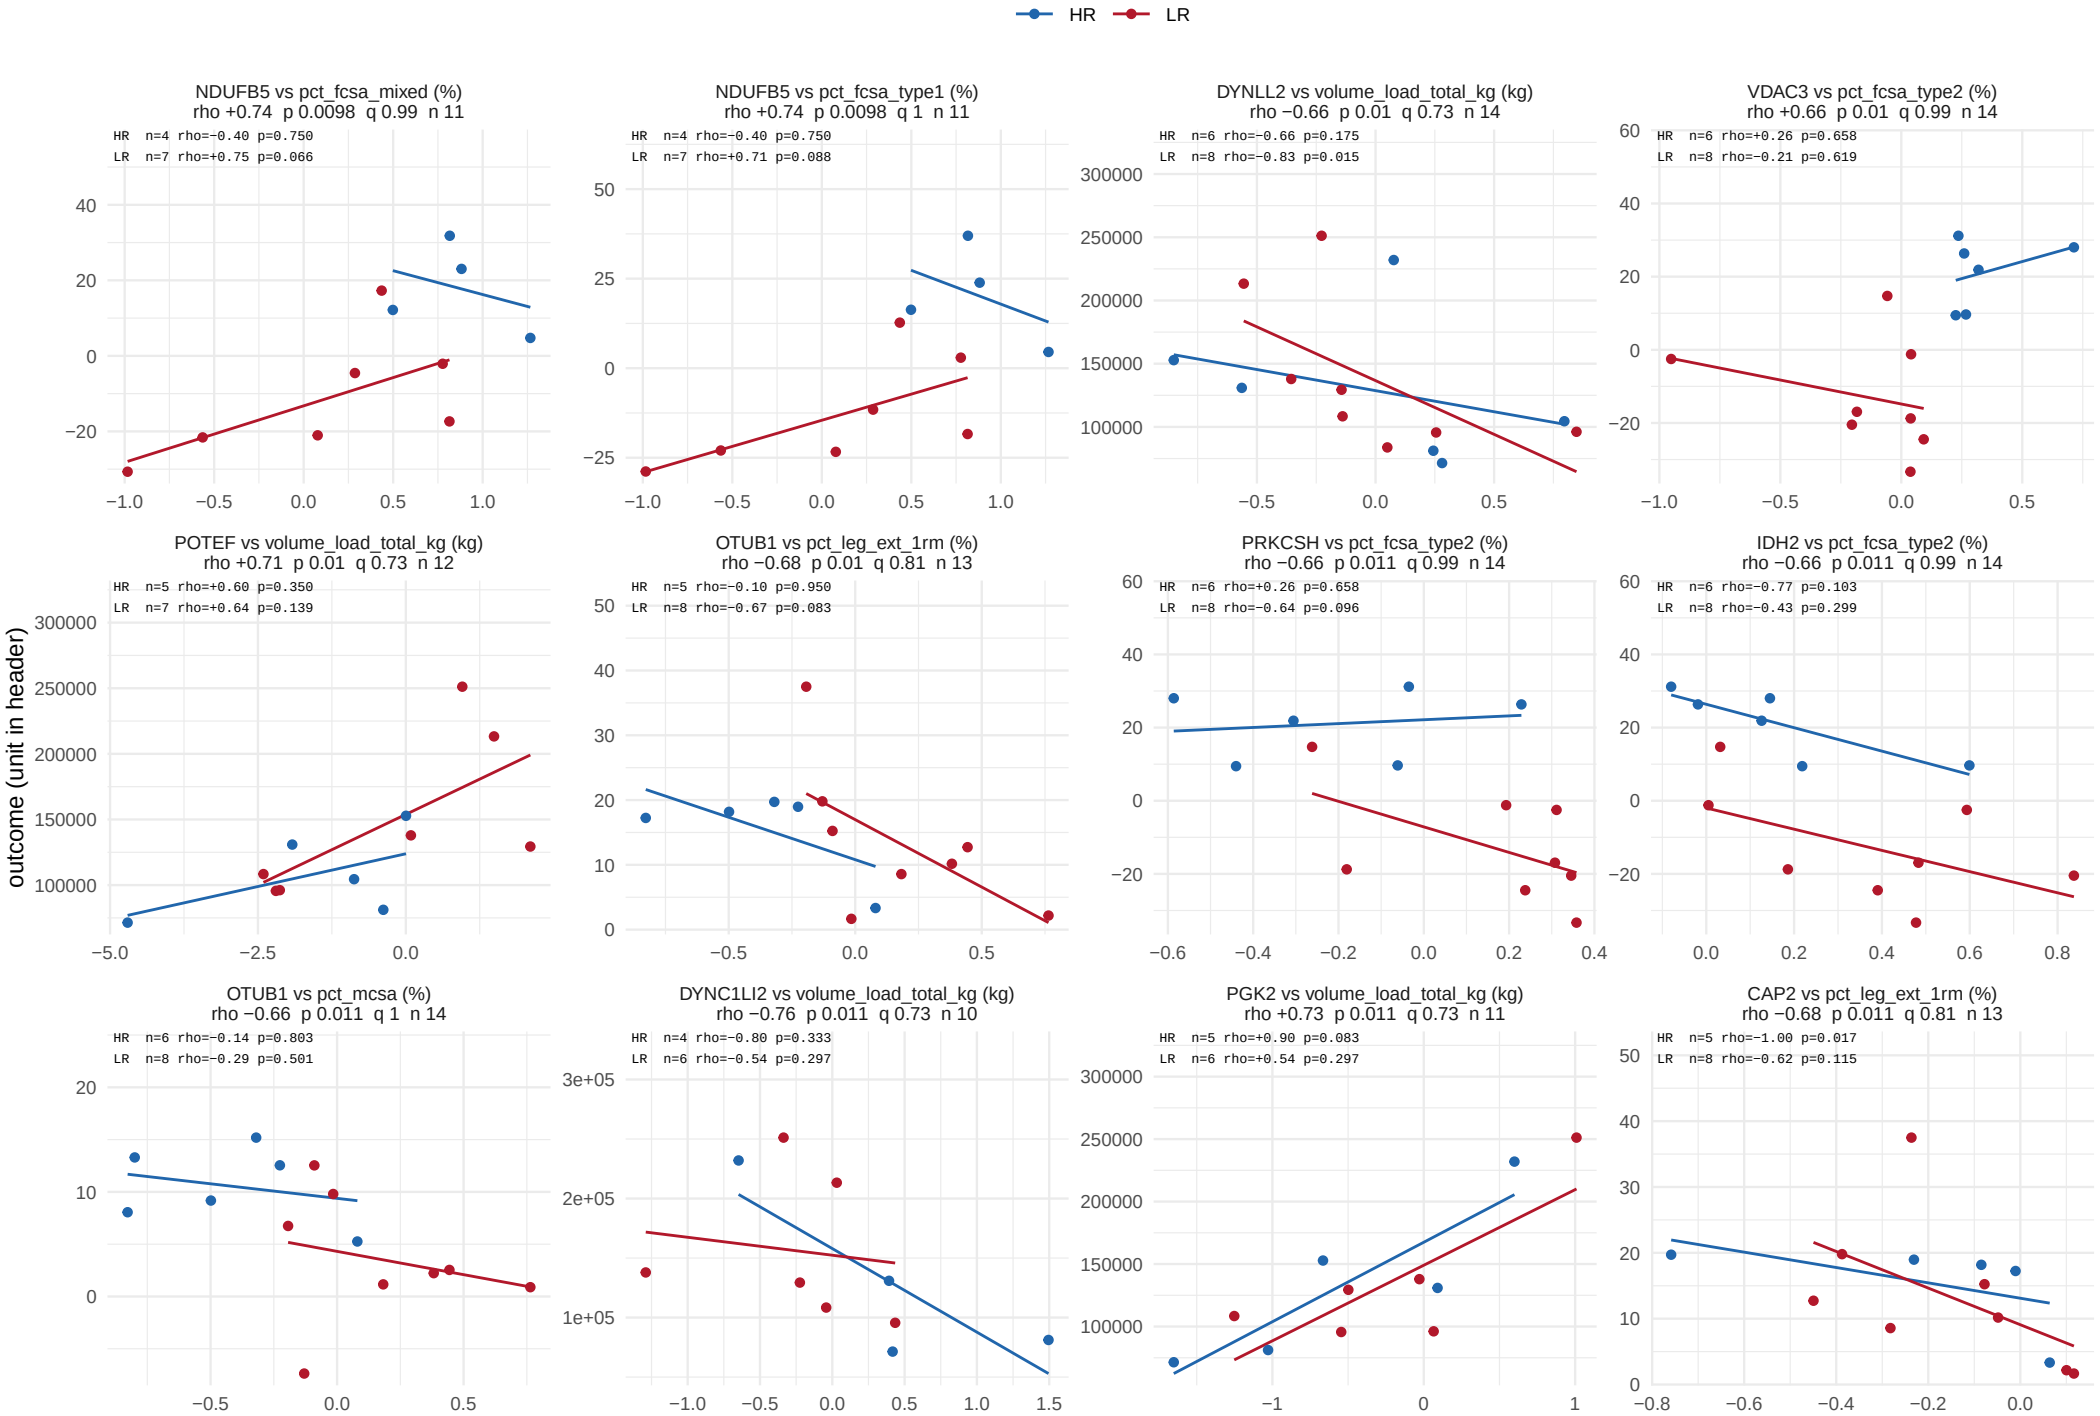

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


467 of 11286 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 10 of 39.

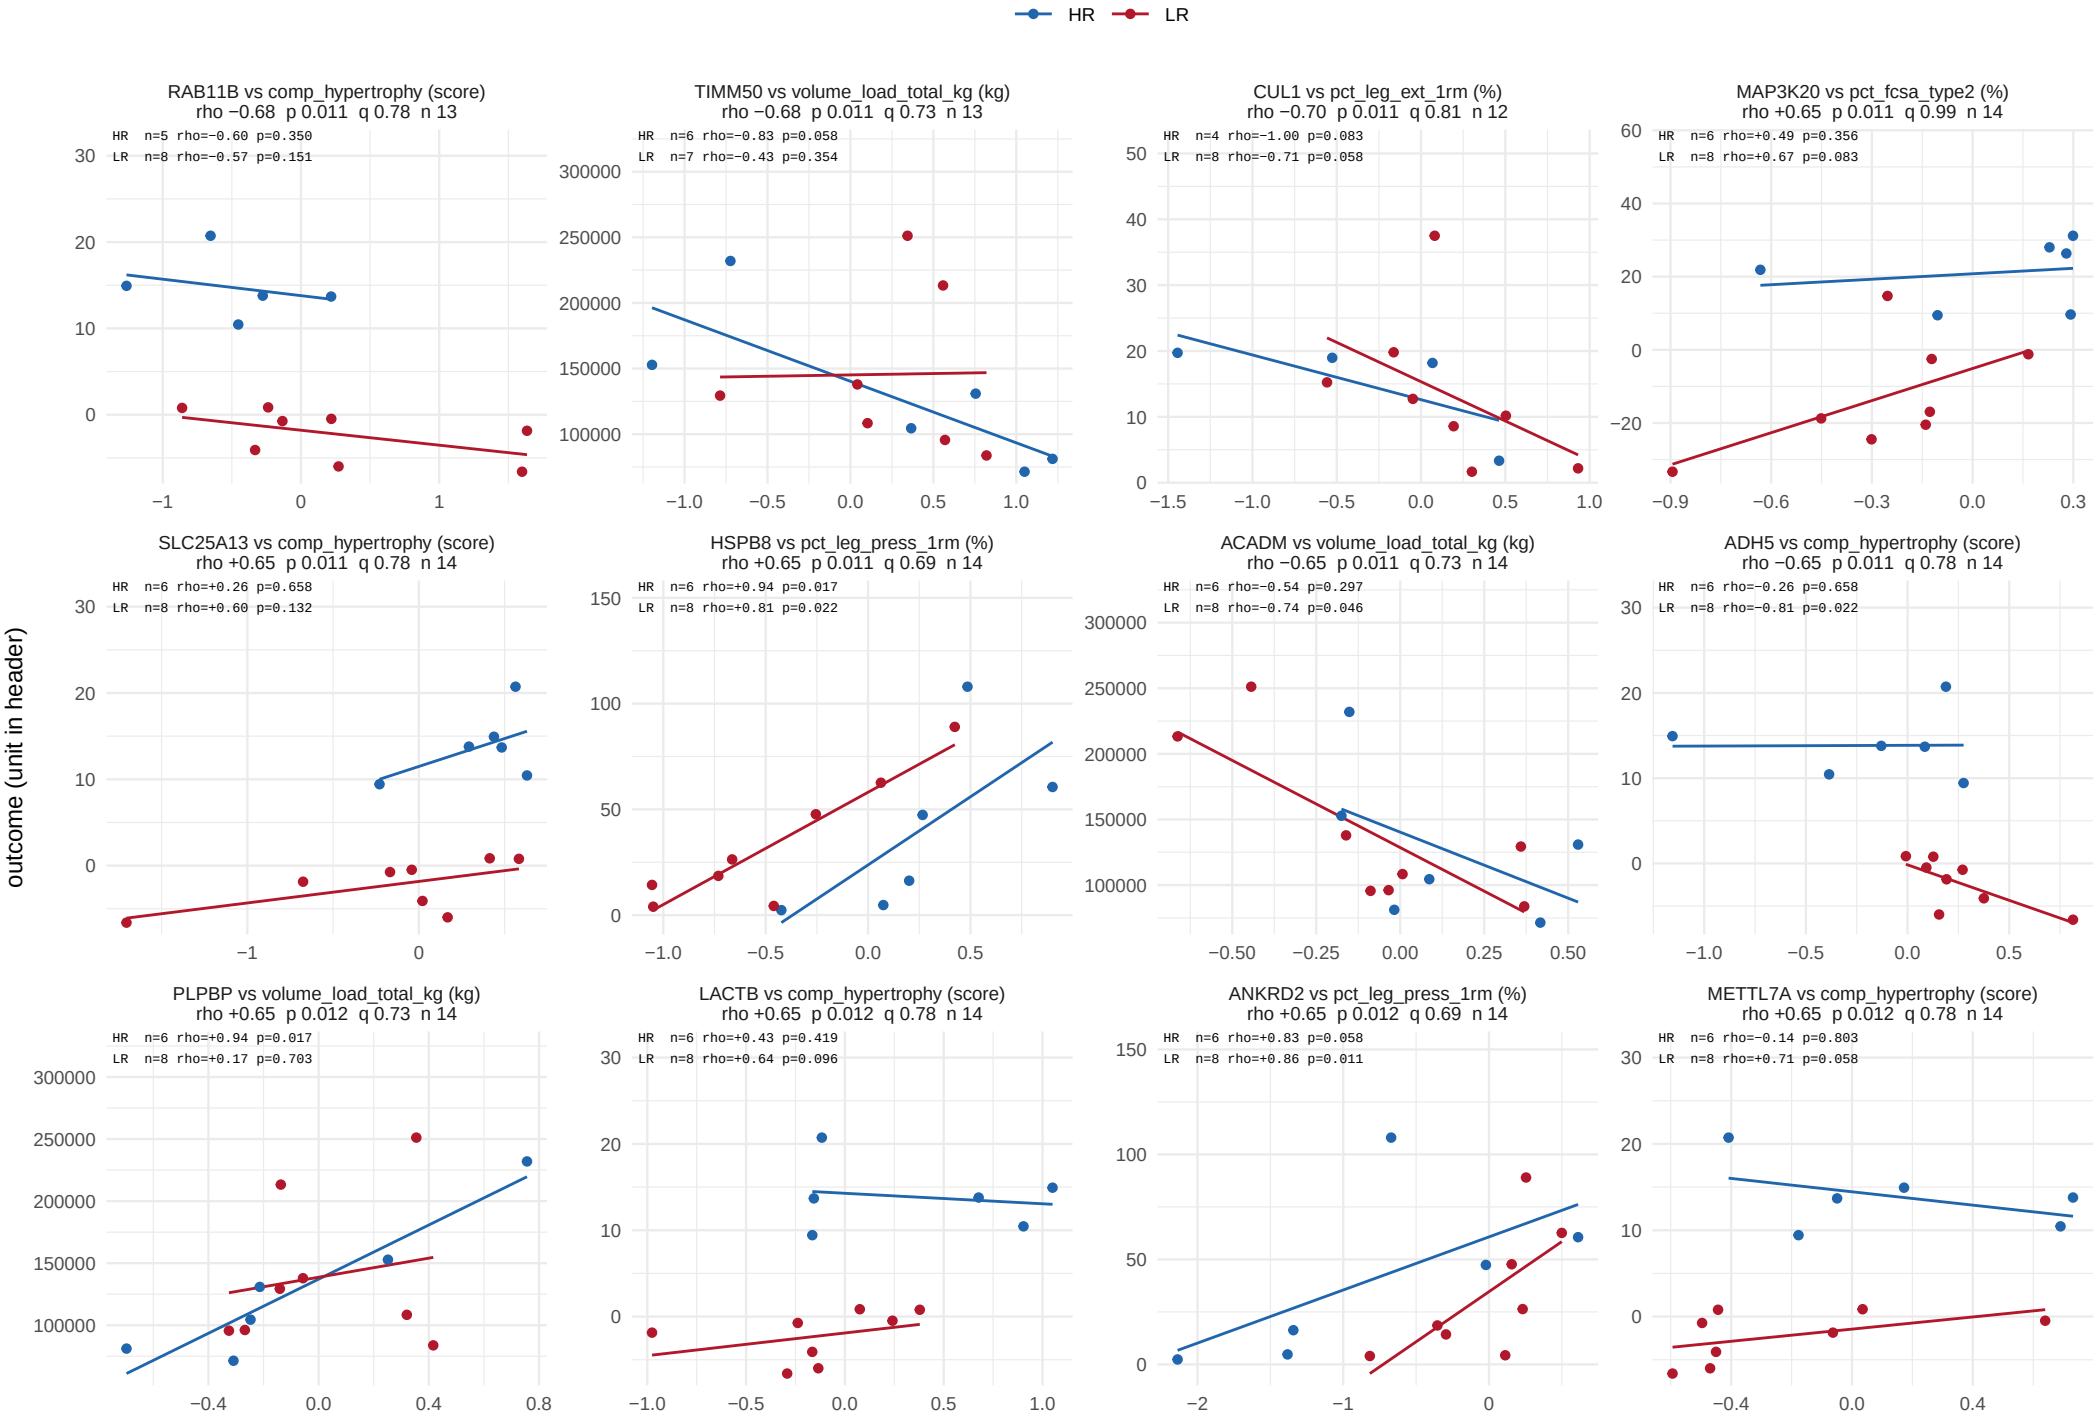

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


467 of 11286 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 11 of 39.

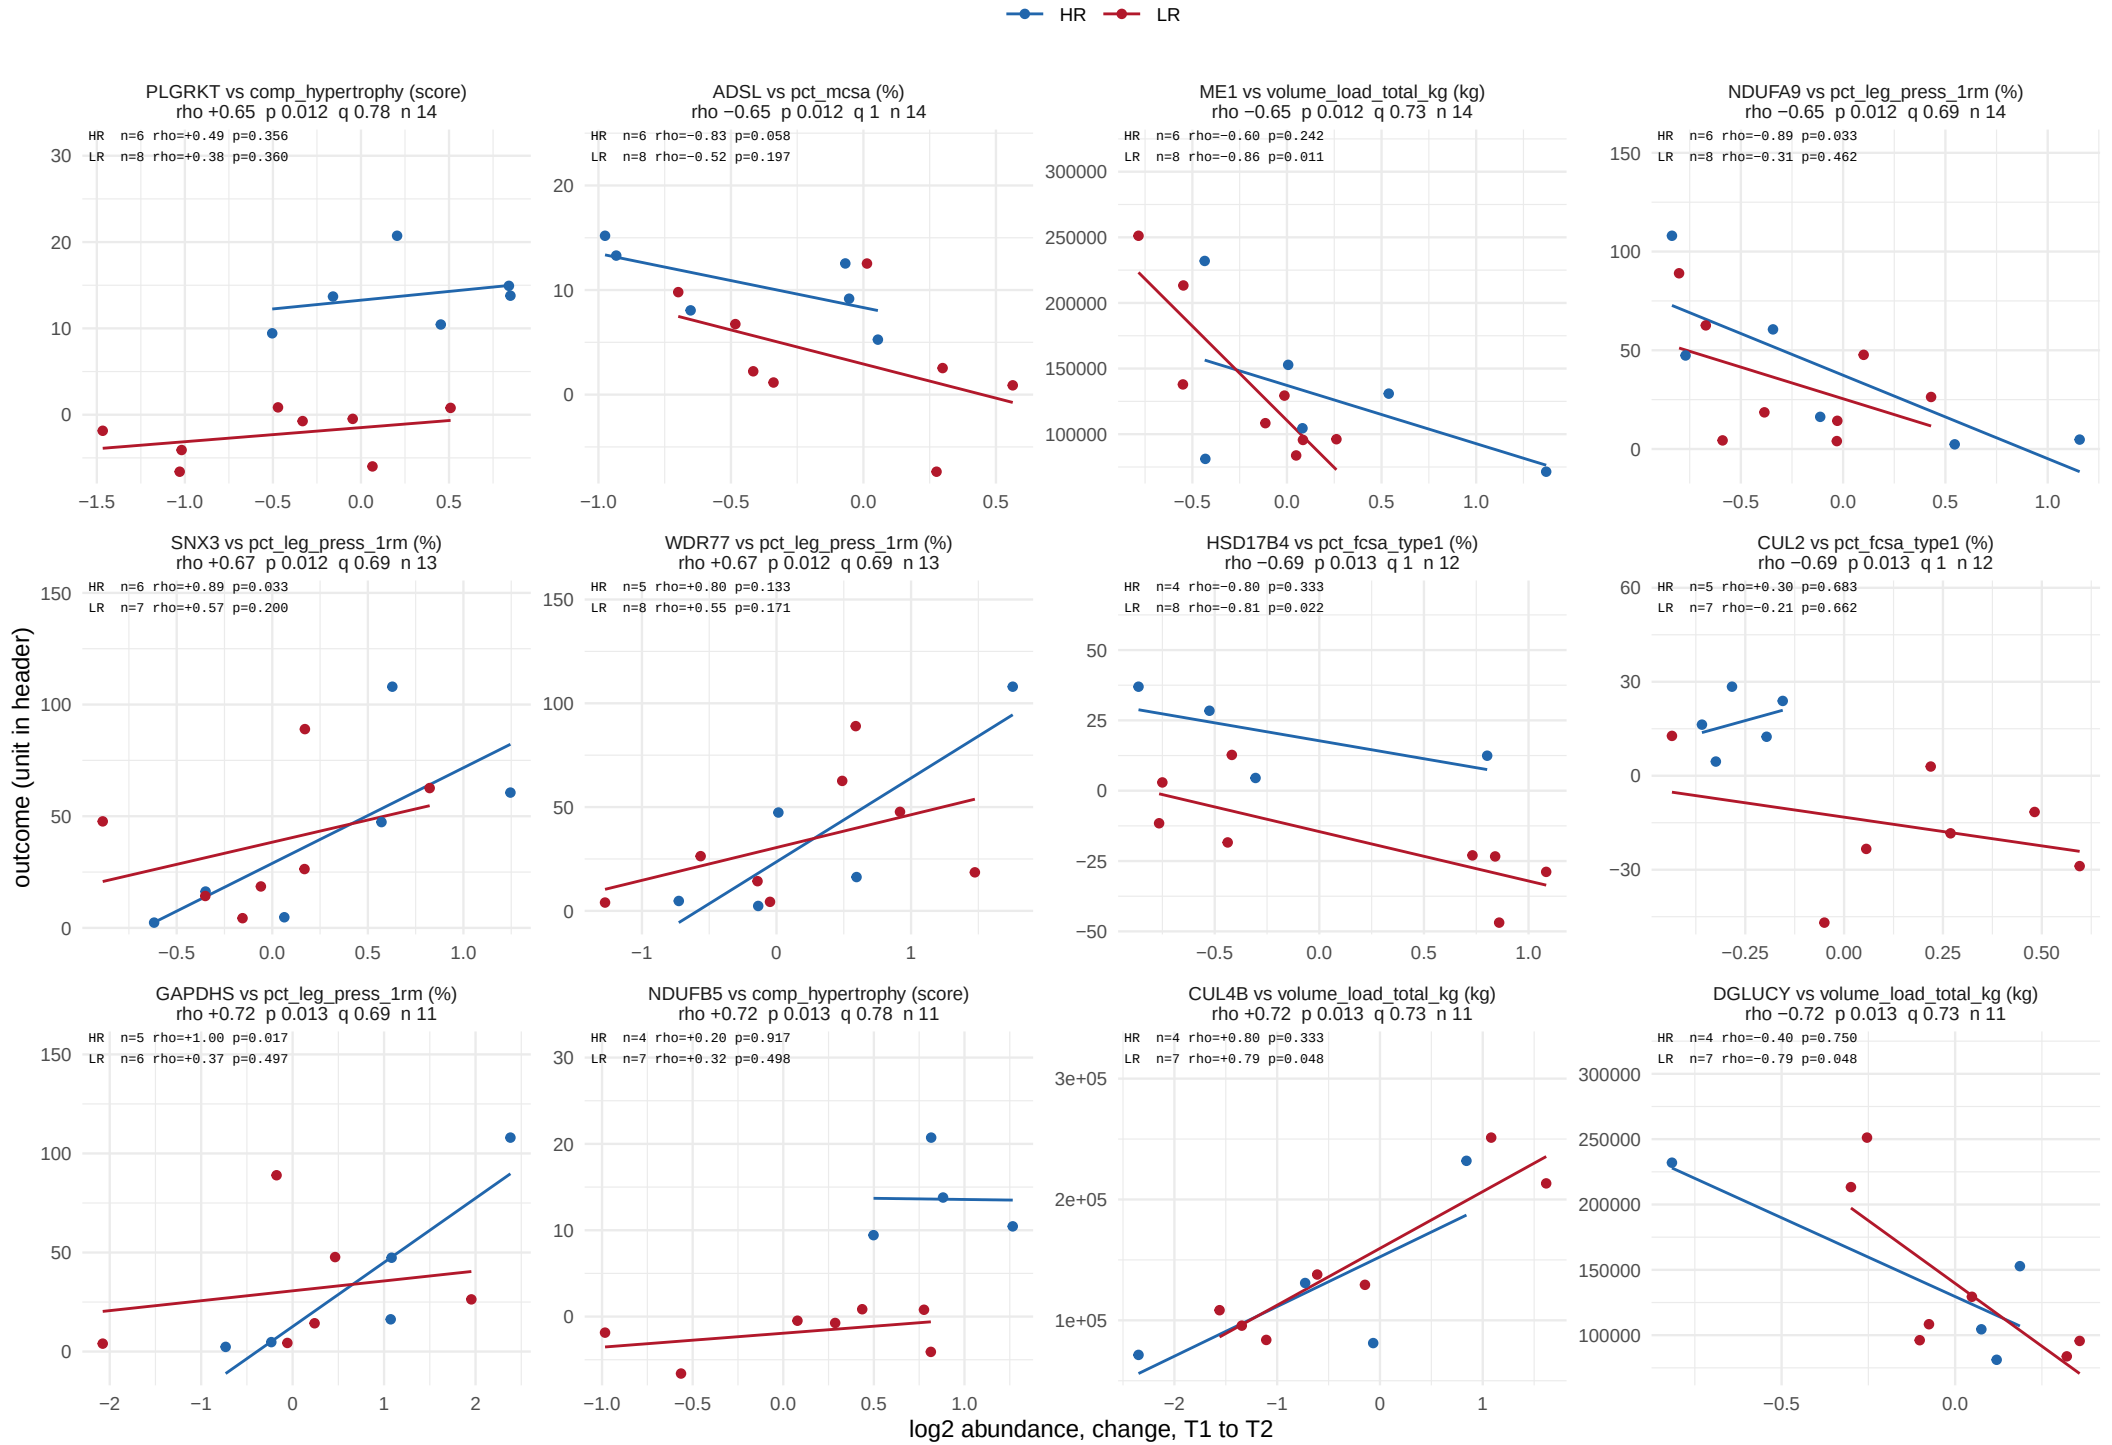

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


467 of 11286 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 12 of 39.

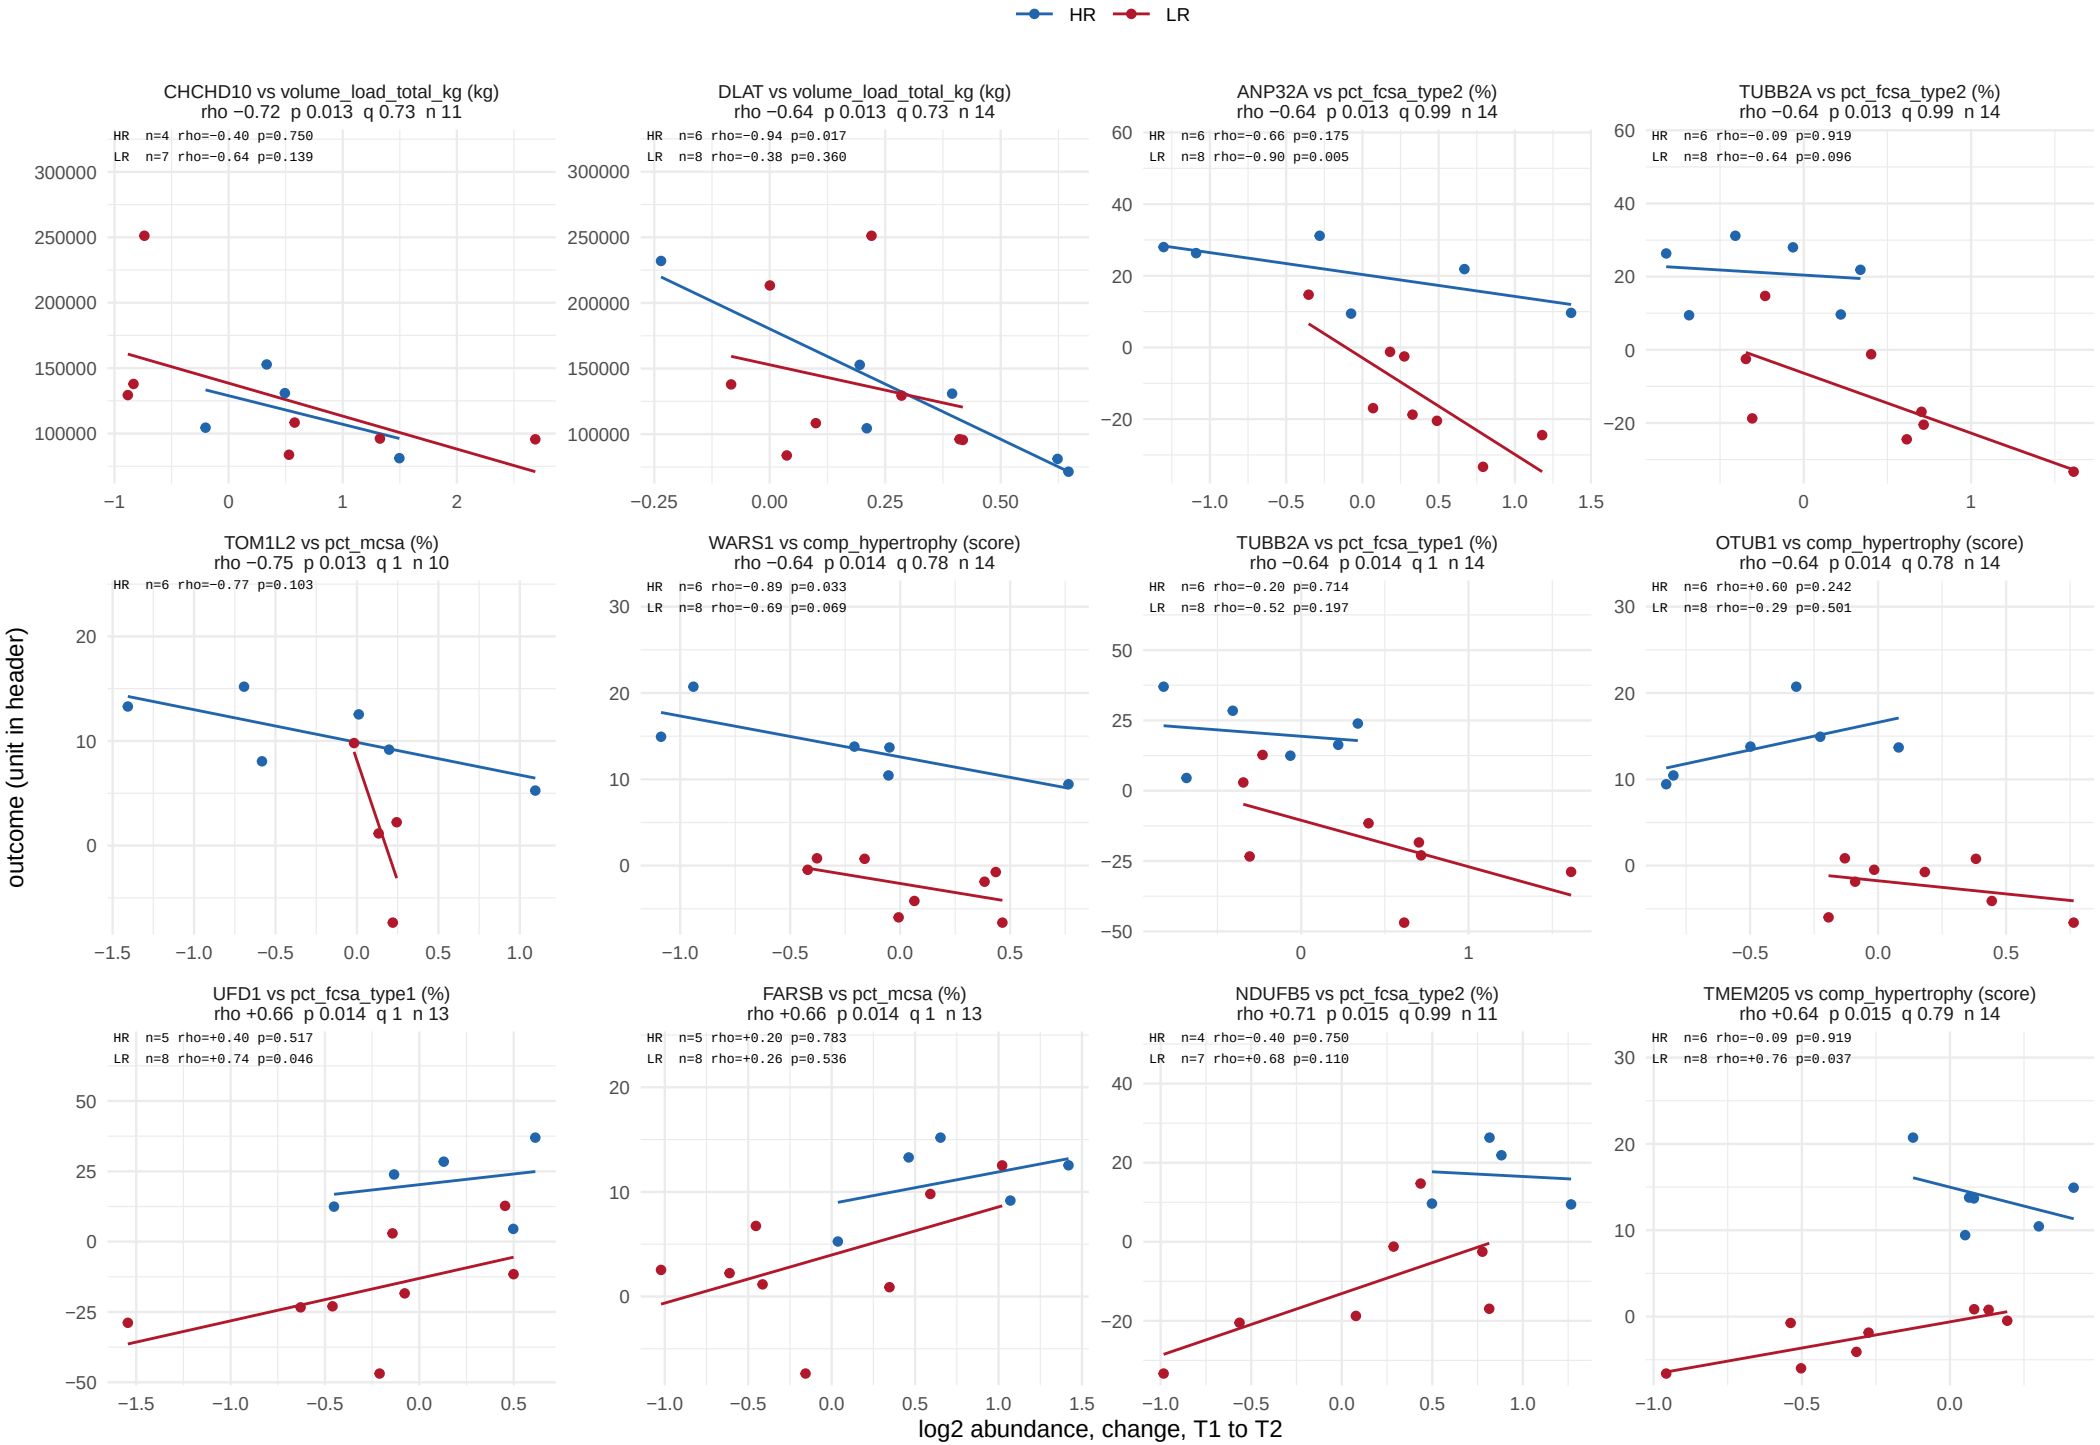

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


467 of 11286 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 13 of 39.

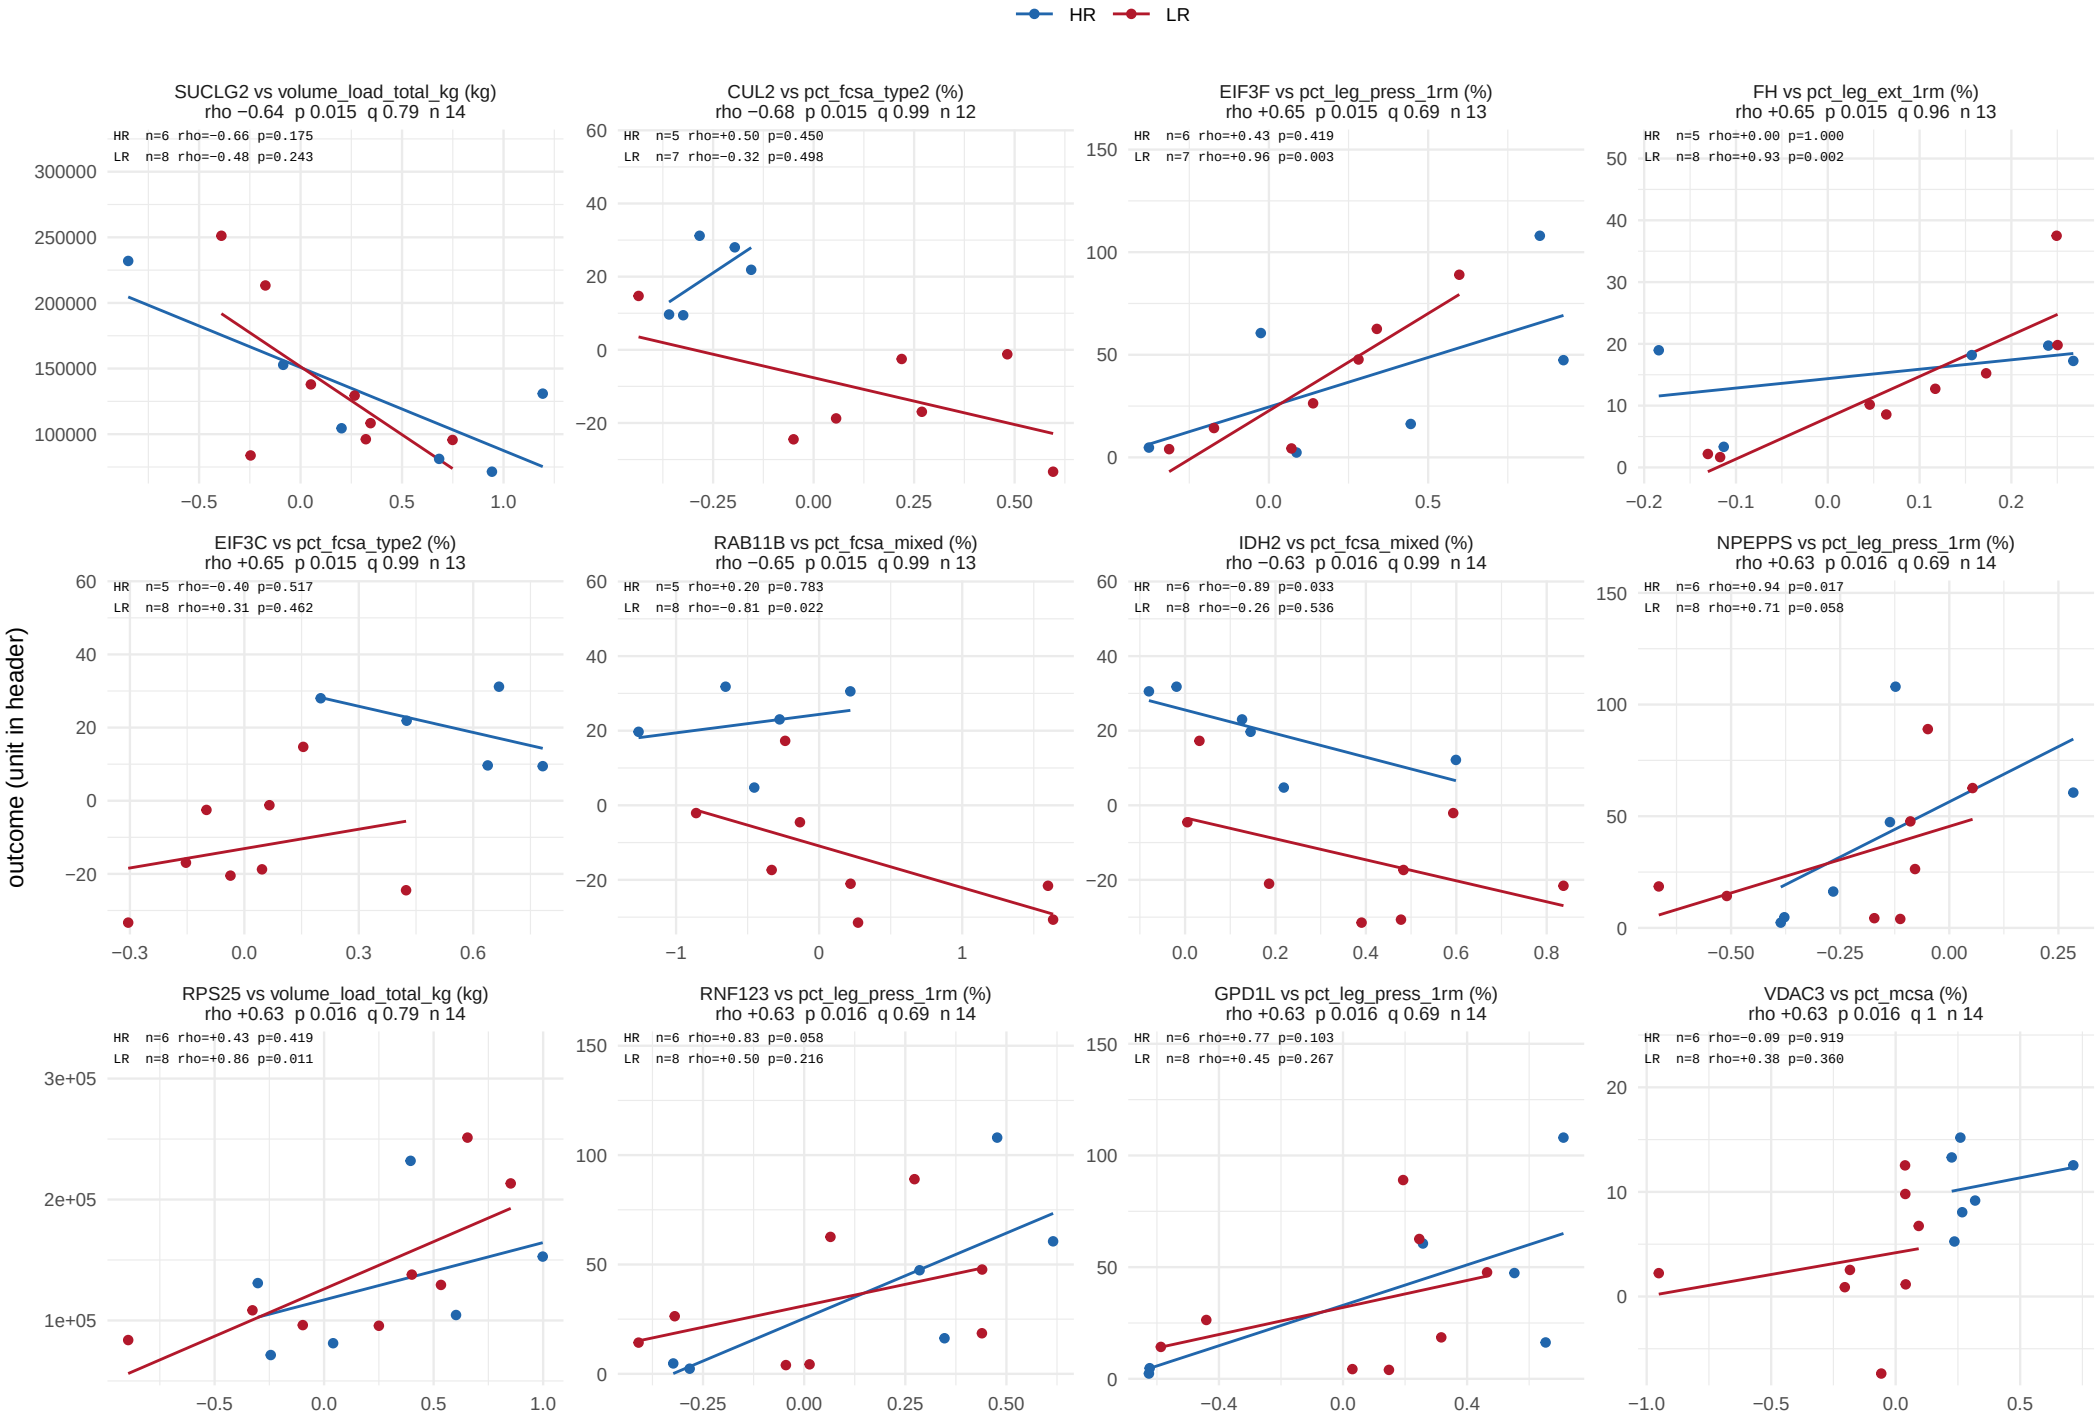

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


467 of 11286 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 14 of 39.

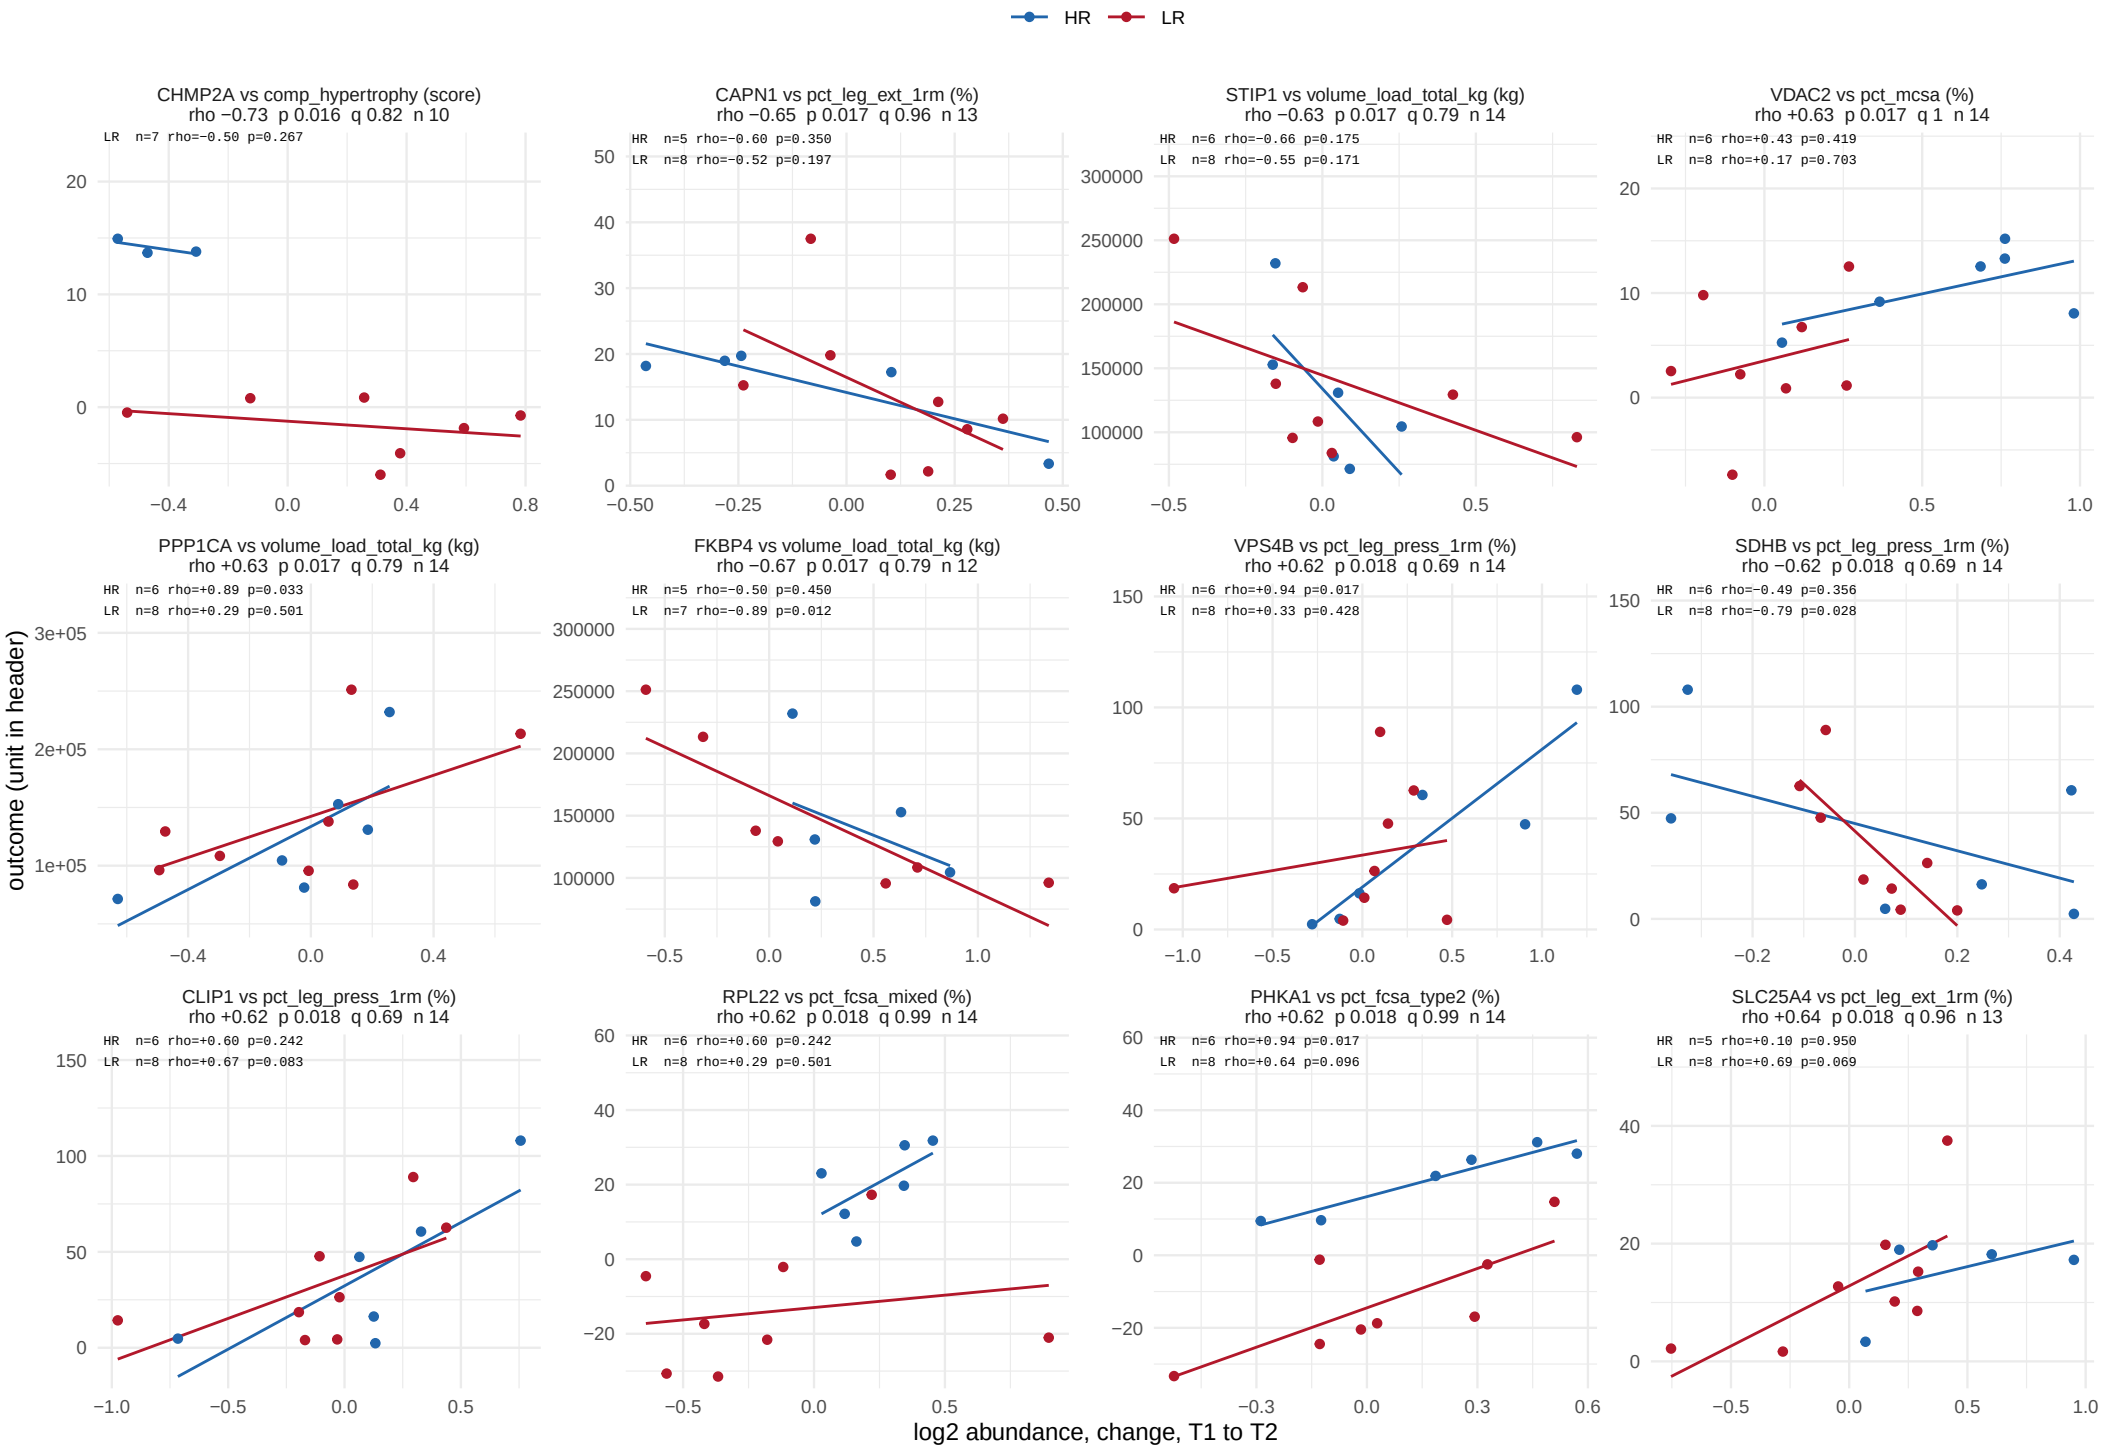

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


467 of 11286 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 15 of 39.

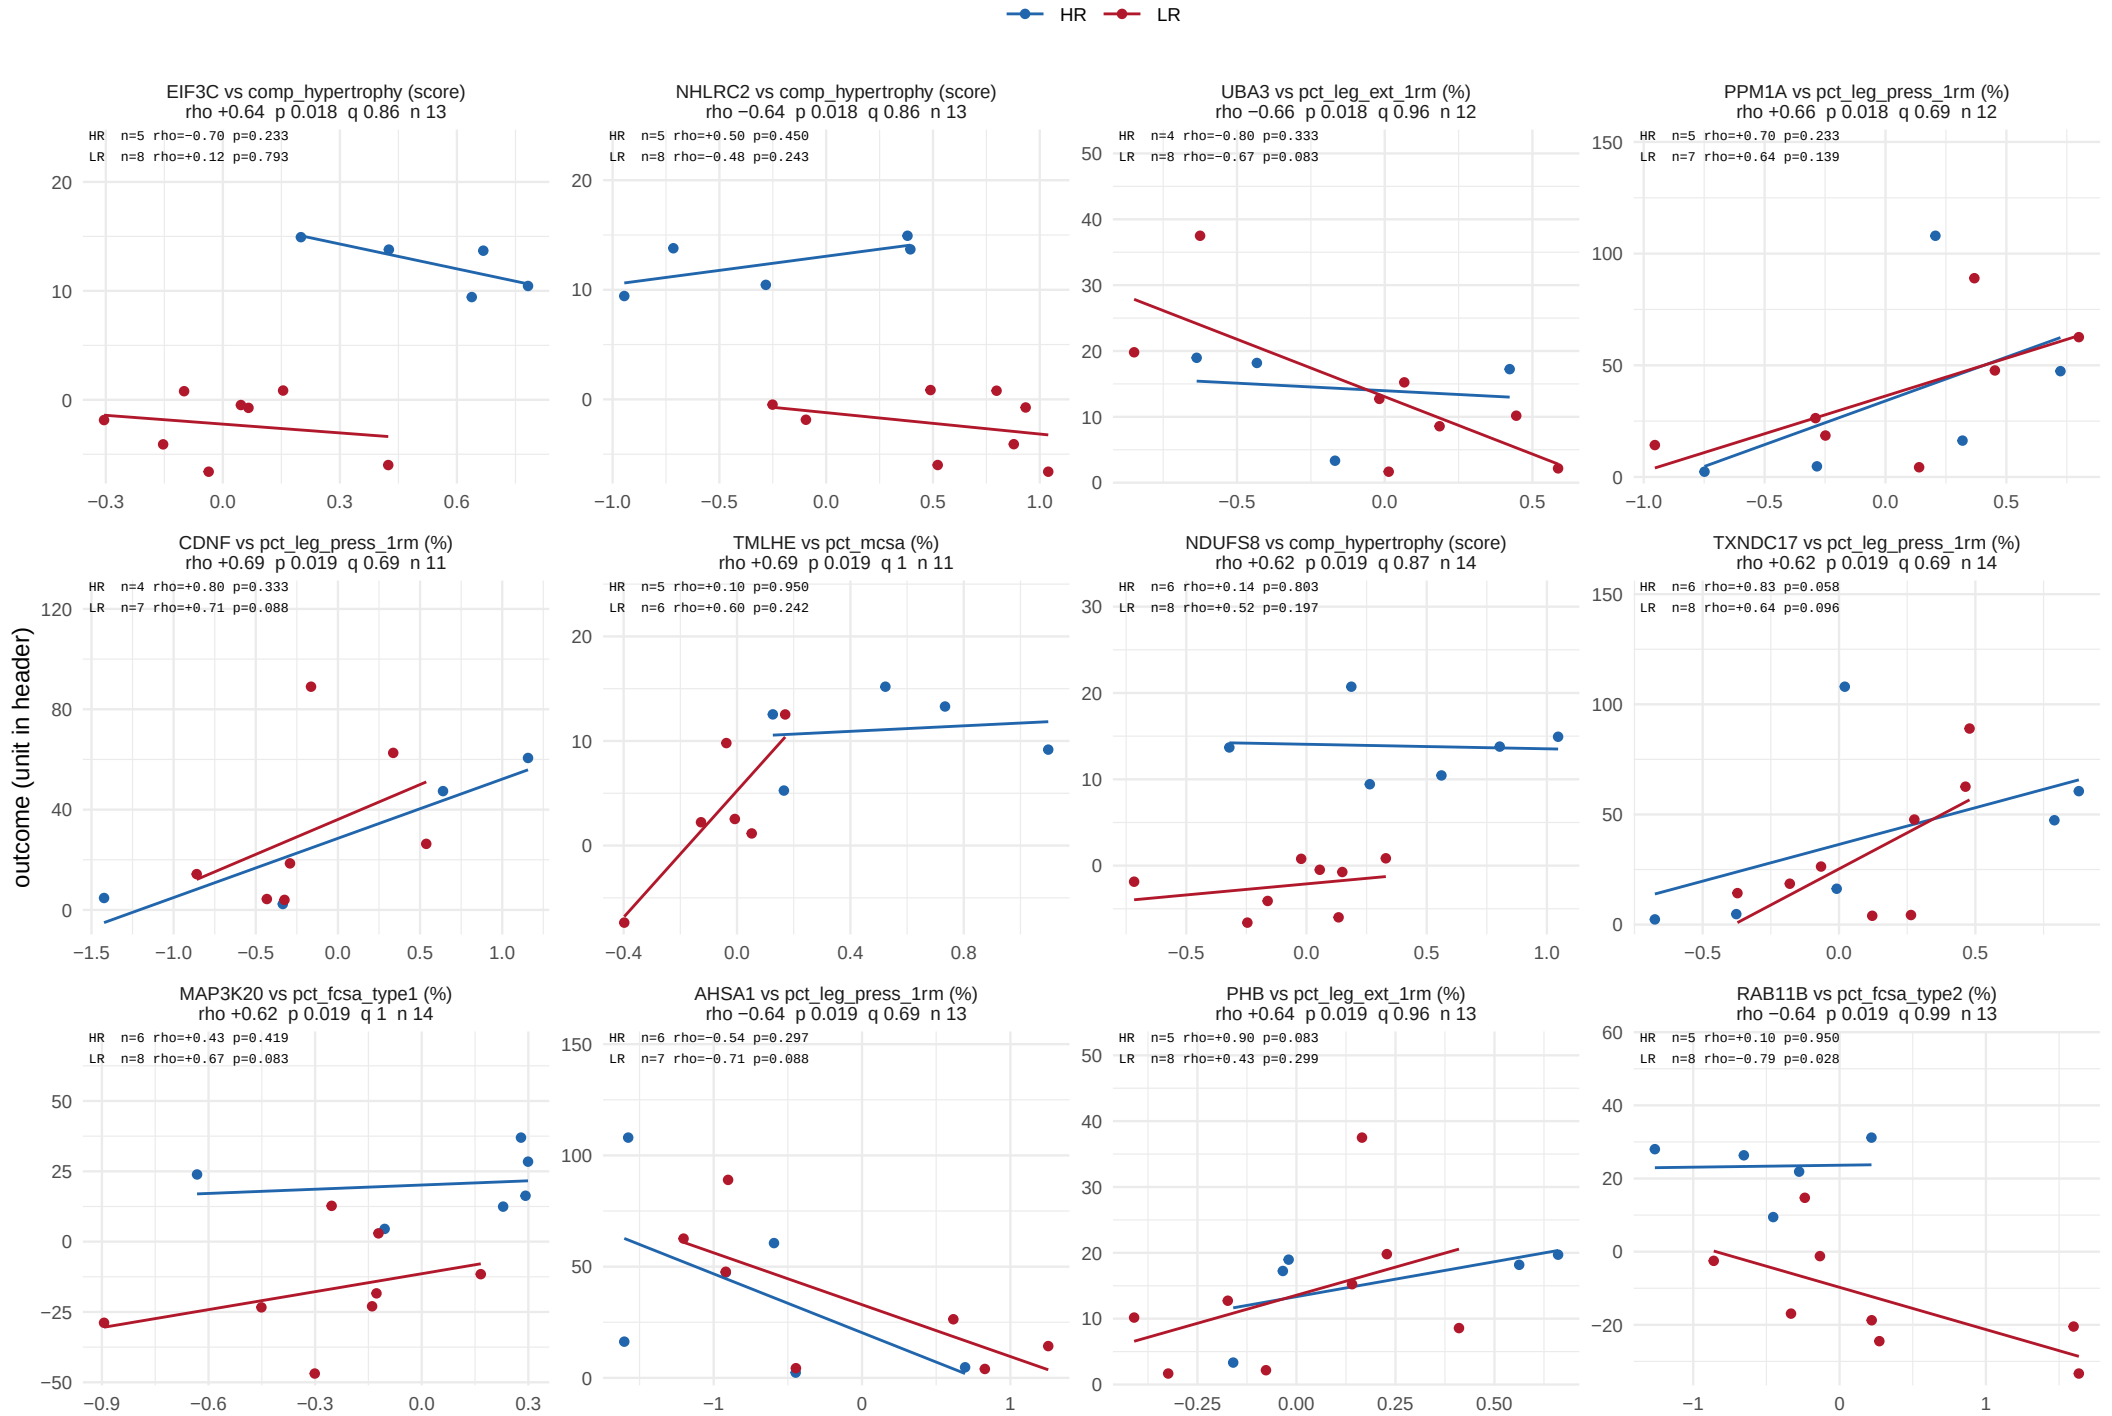

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


467 of 11286 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 16 of 39.

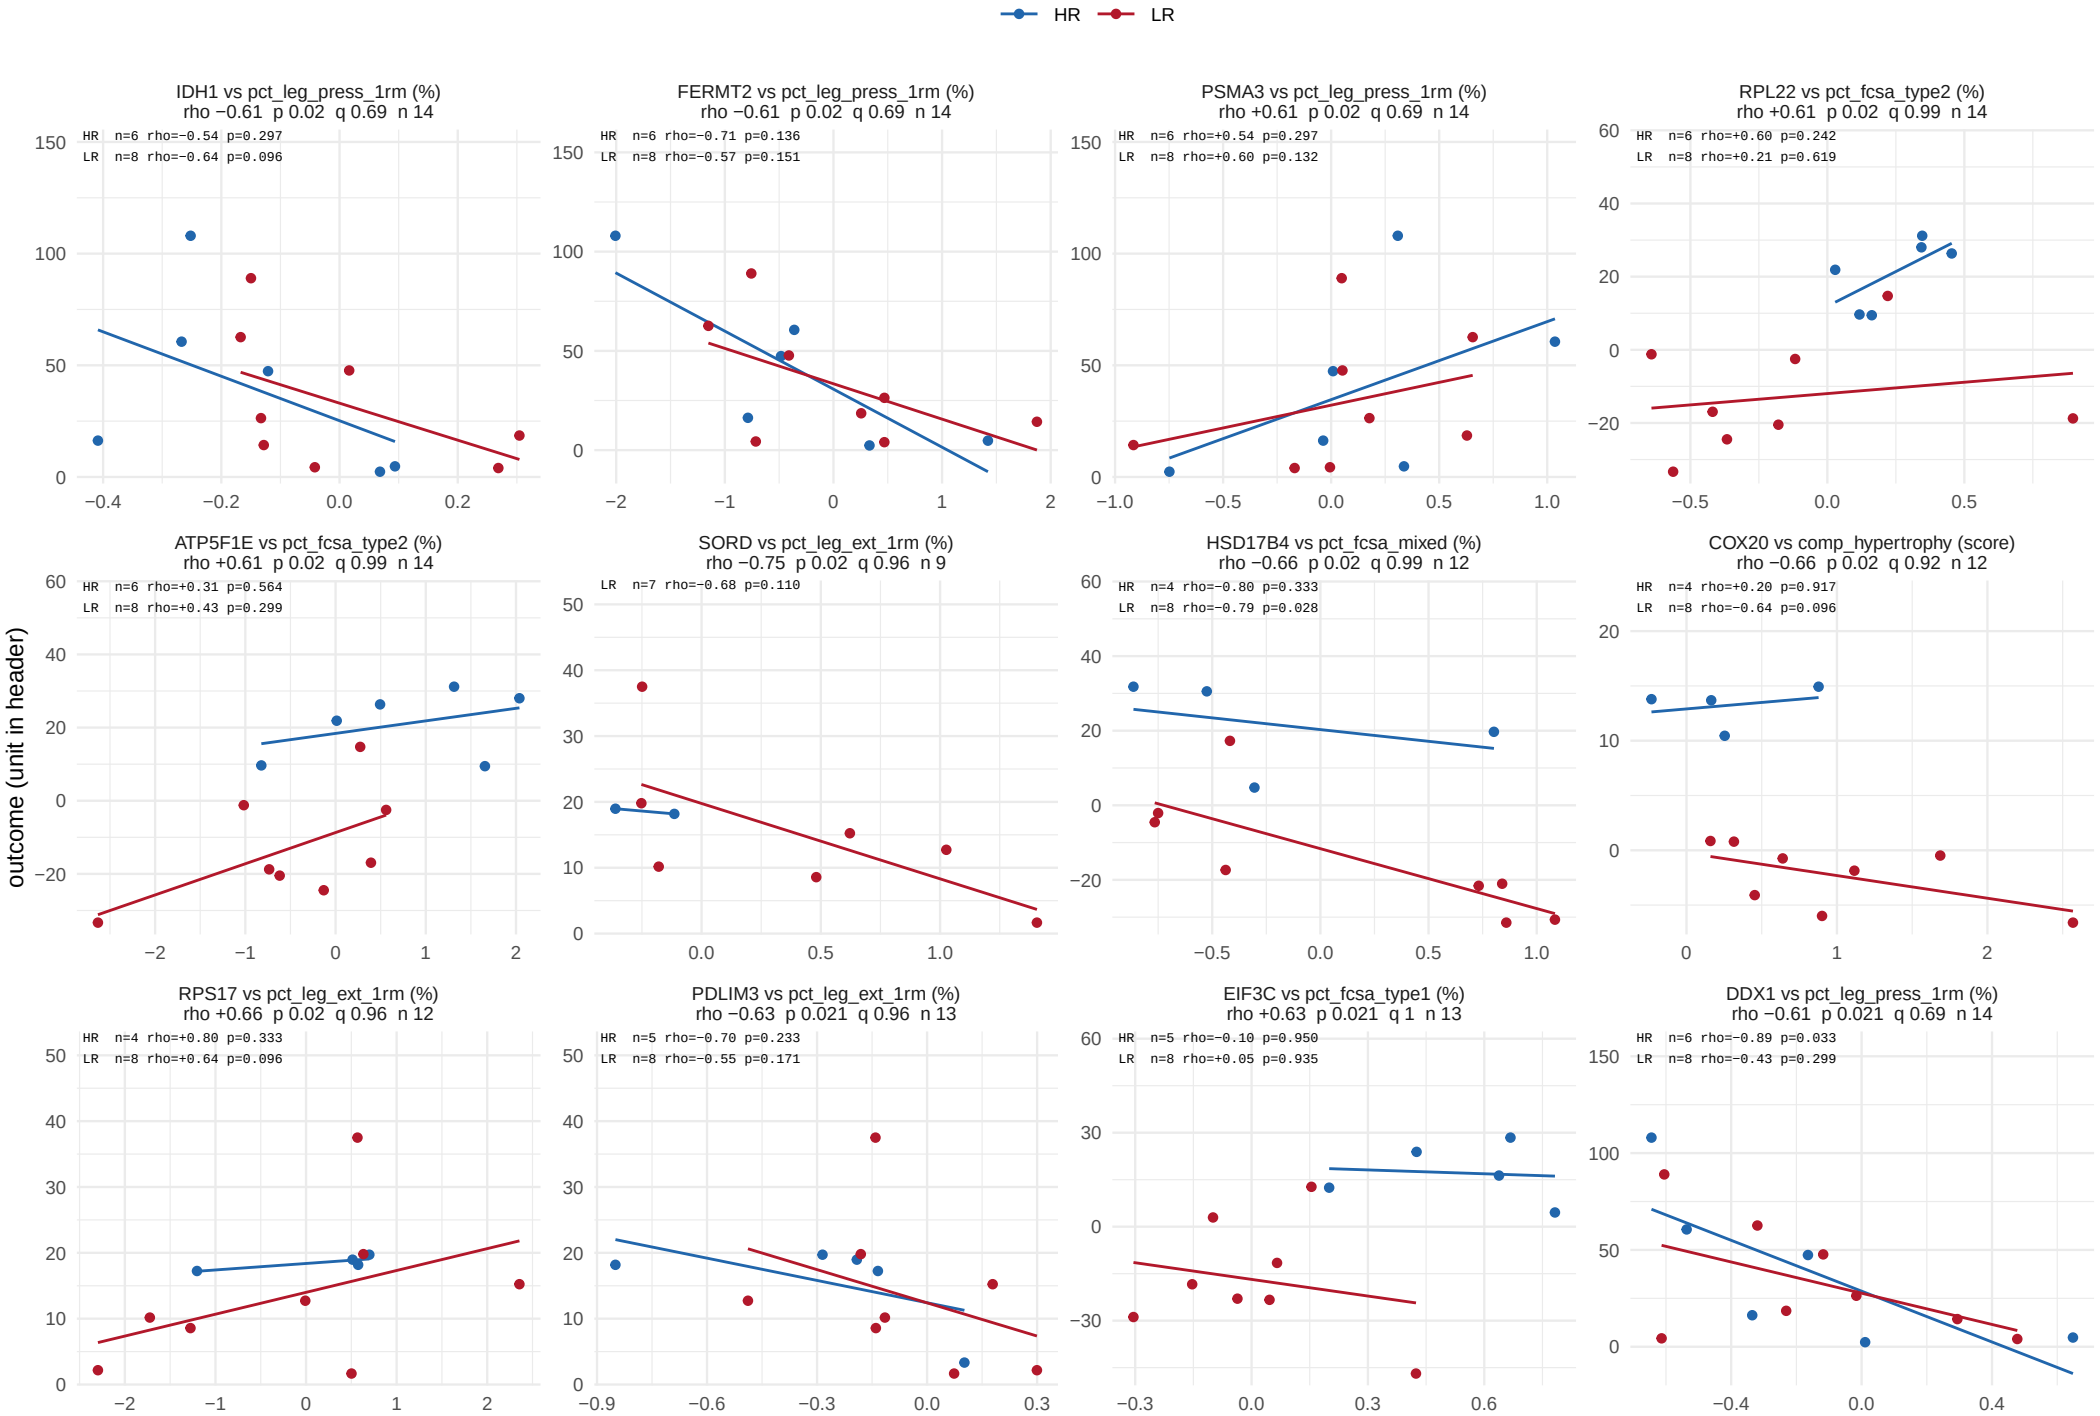

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


467 of 11286 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 17 of 39.

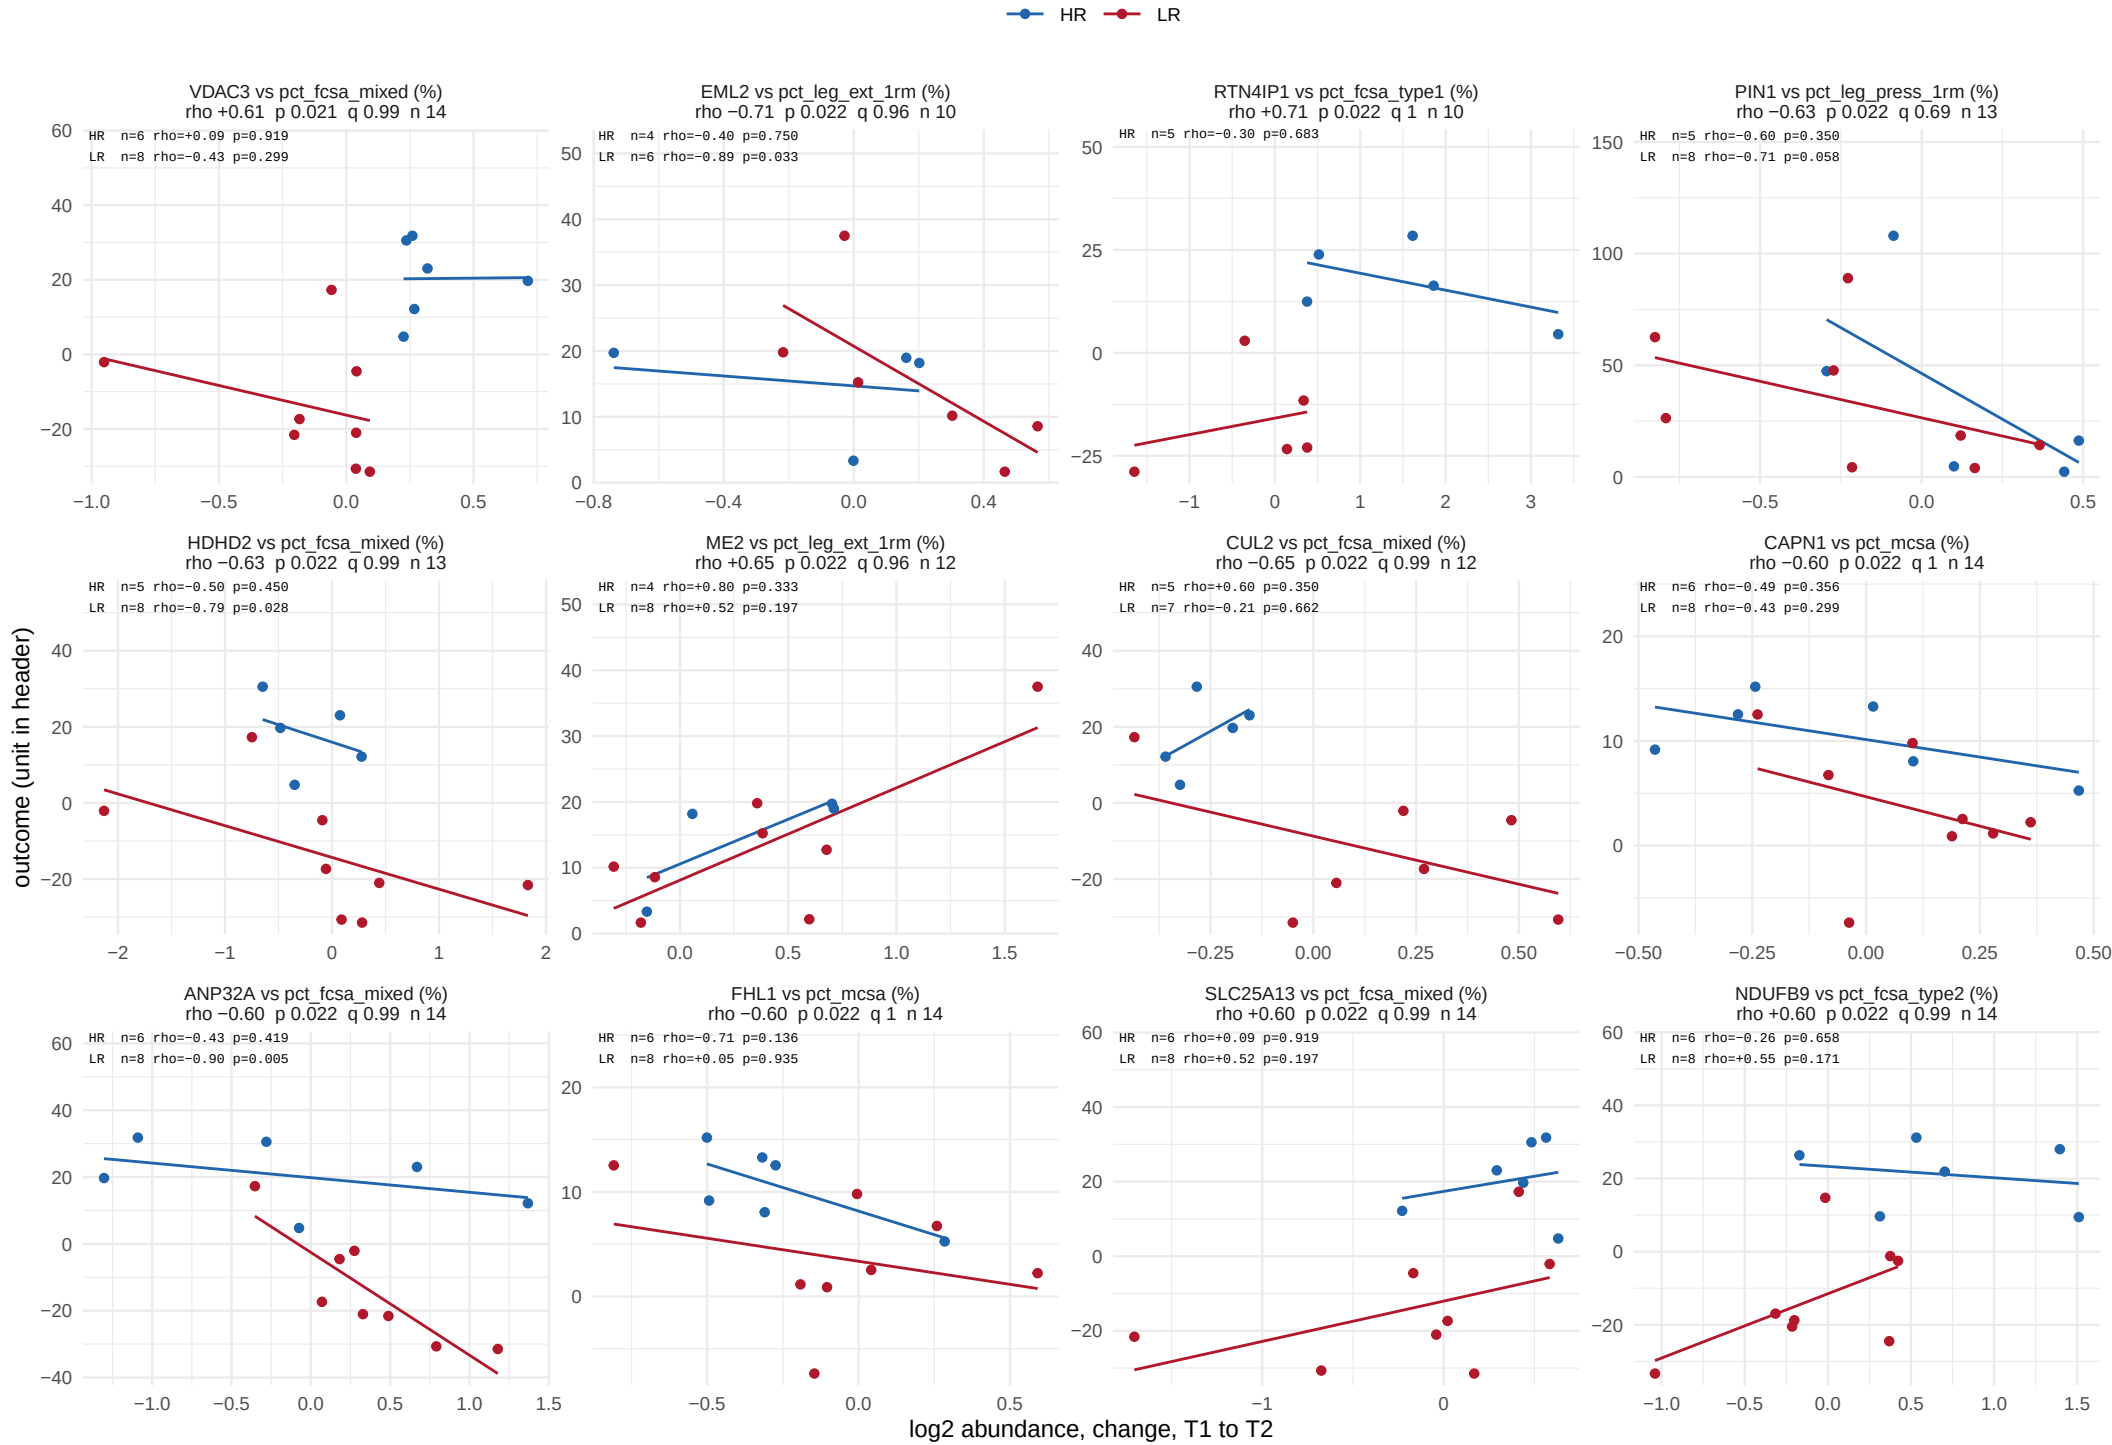

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


467 of 11286 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 18 of 39.

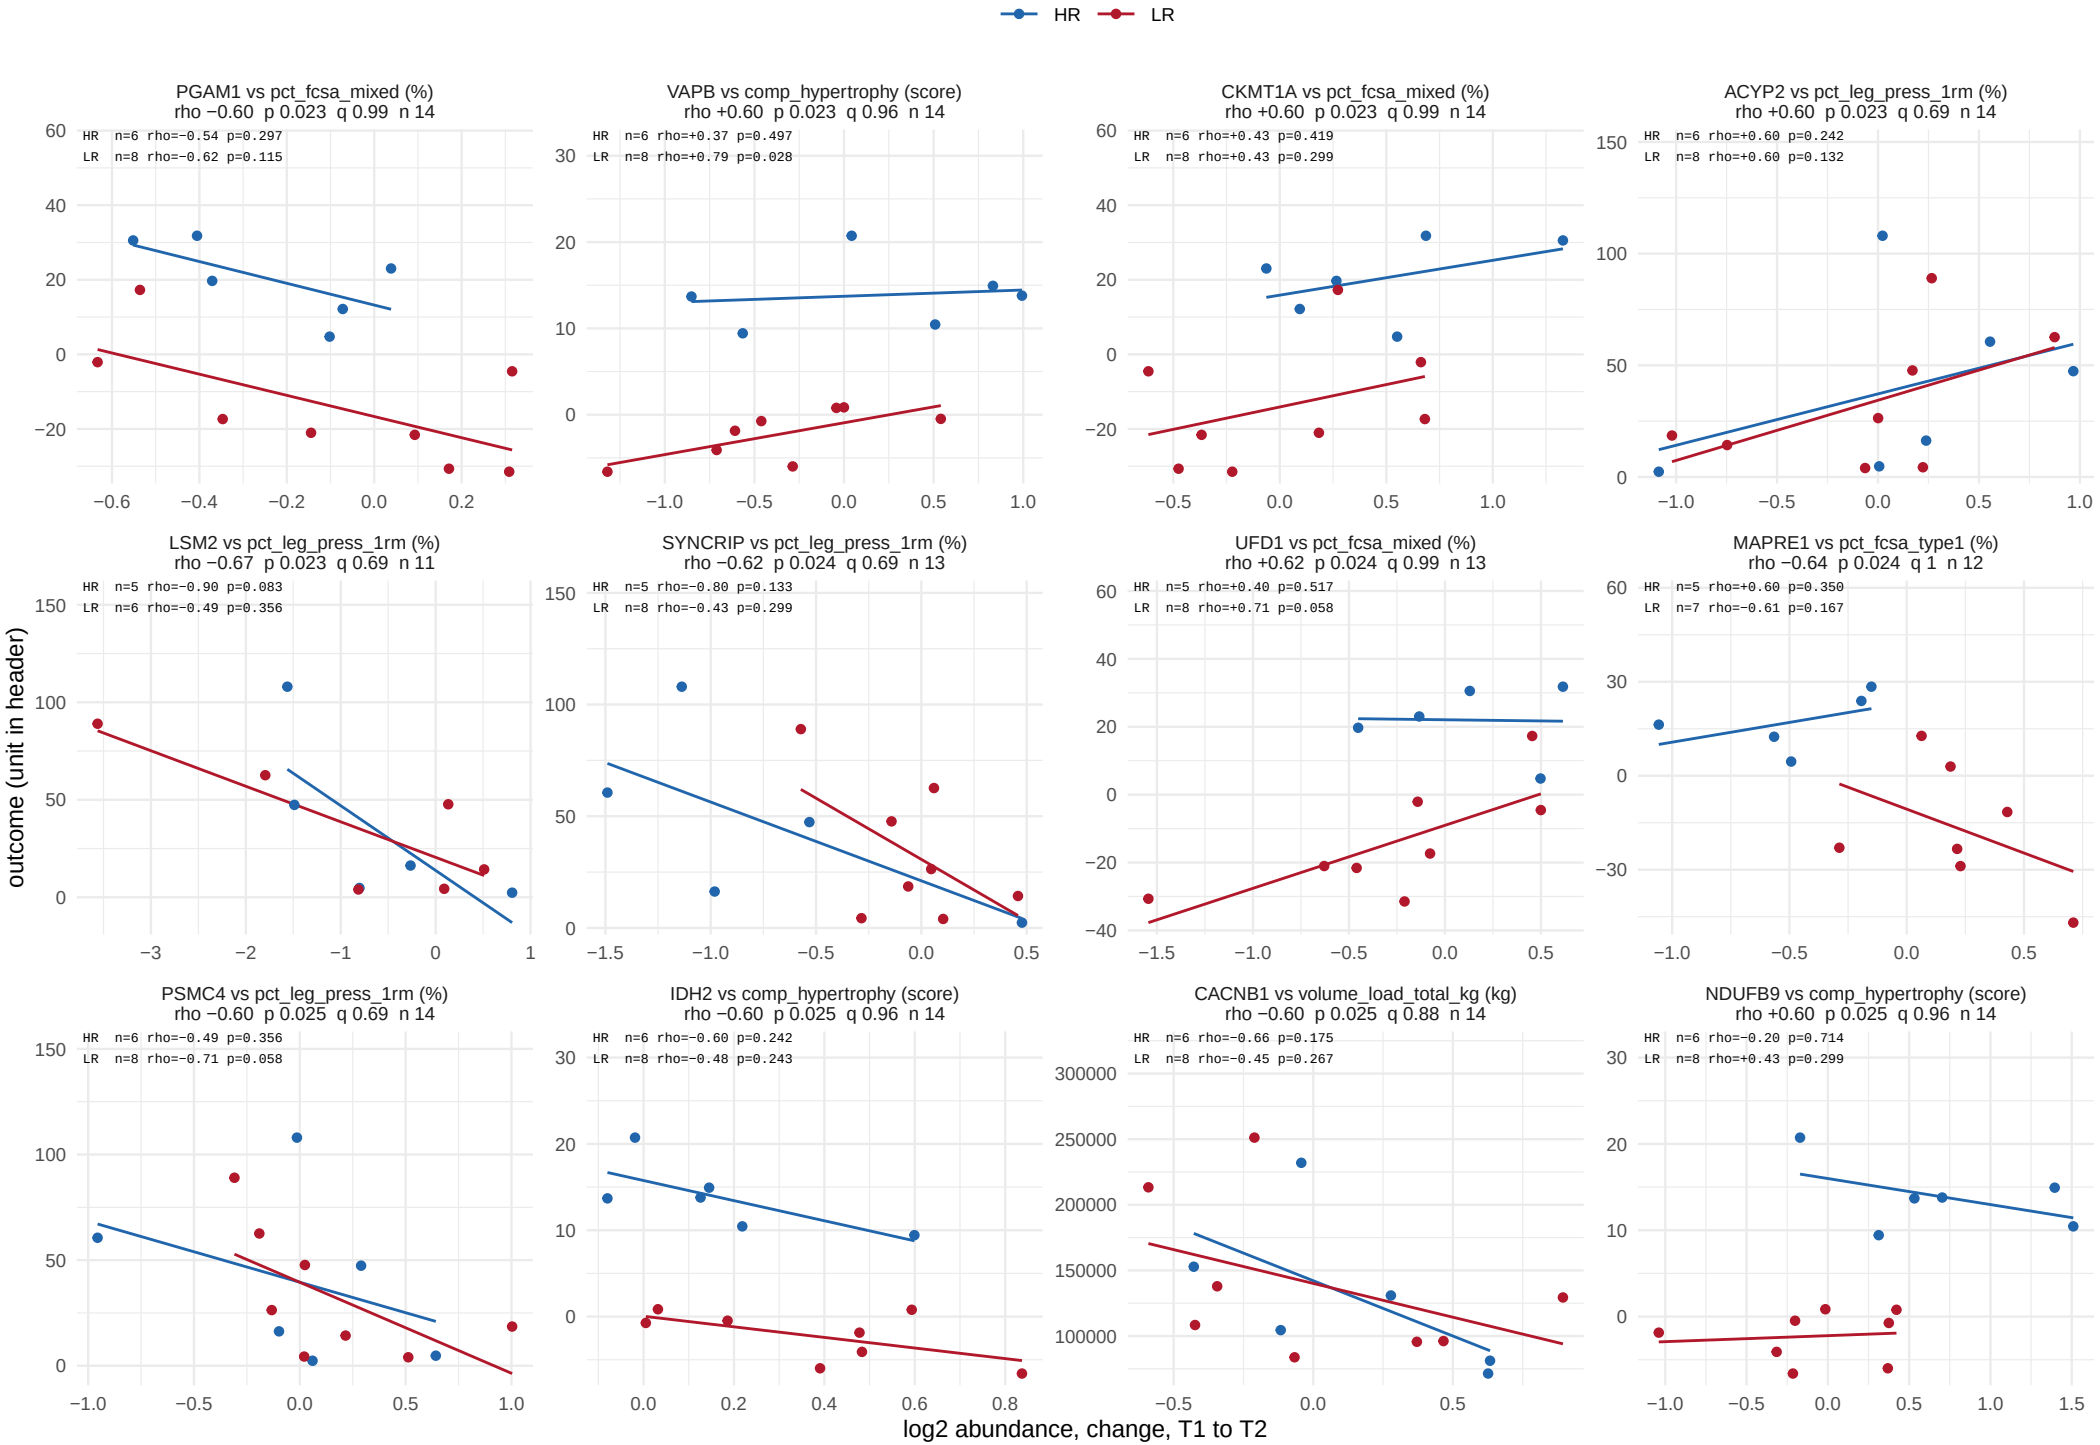

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


467 of 11286 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 19 of 39.

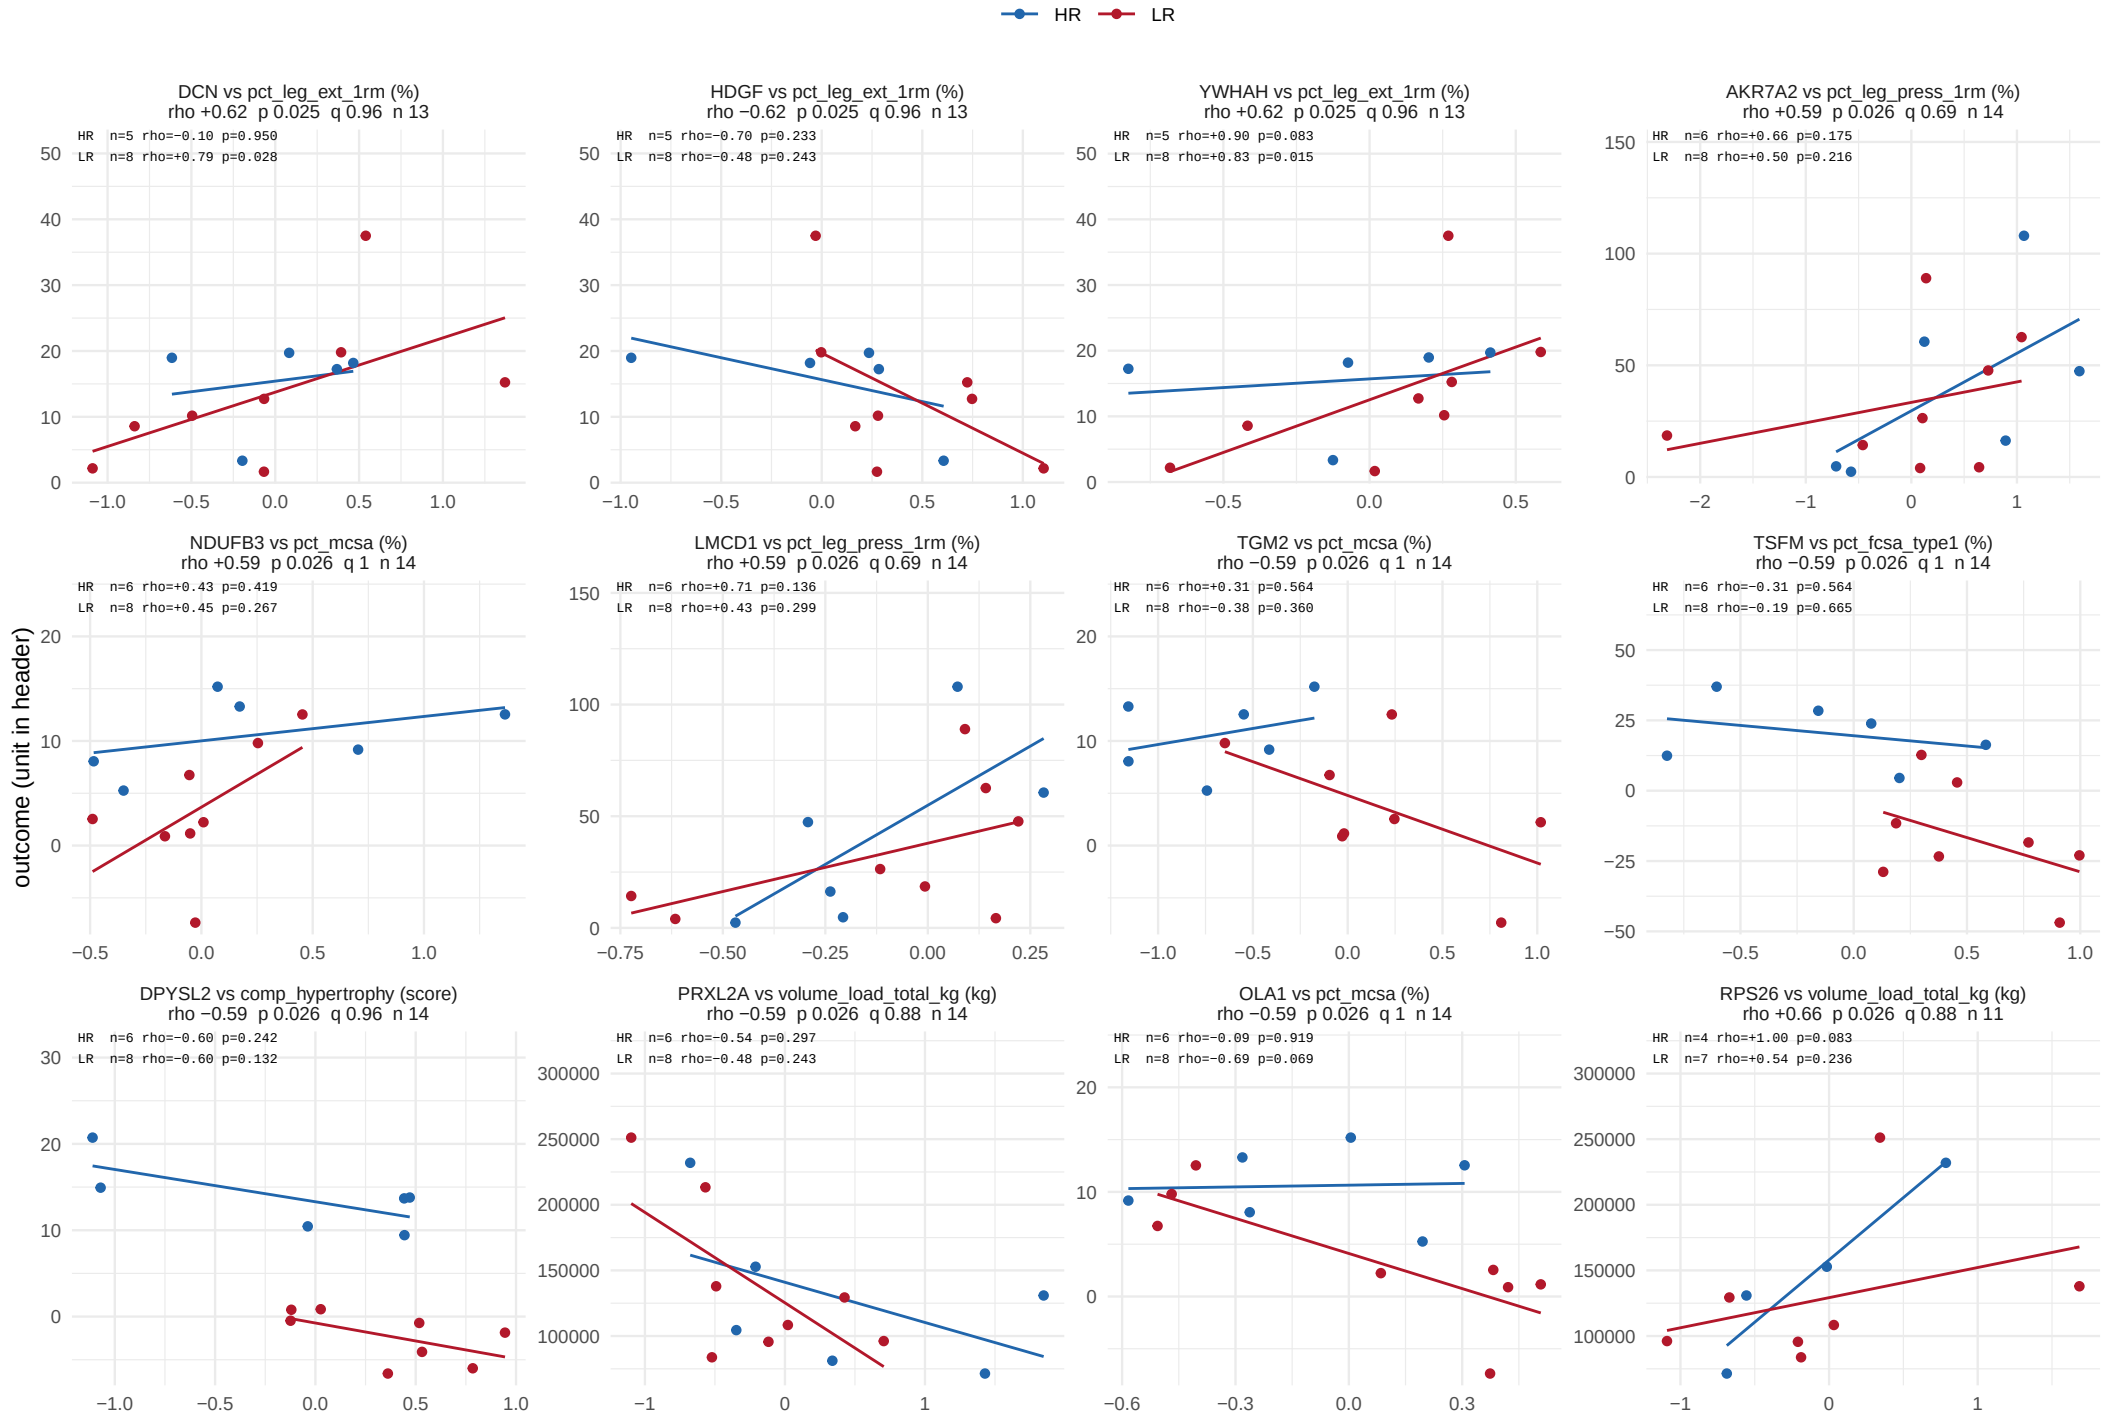

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


467 of 11286 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 20 of 39.

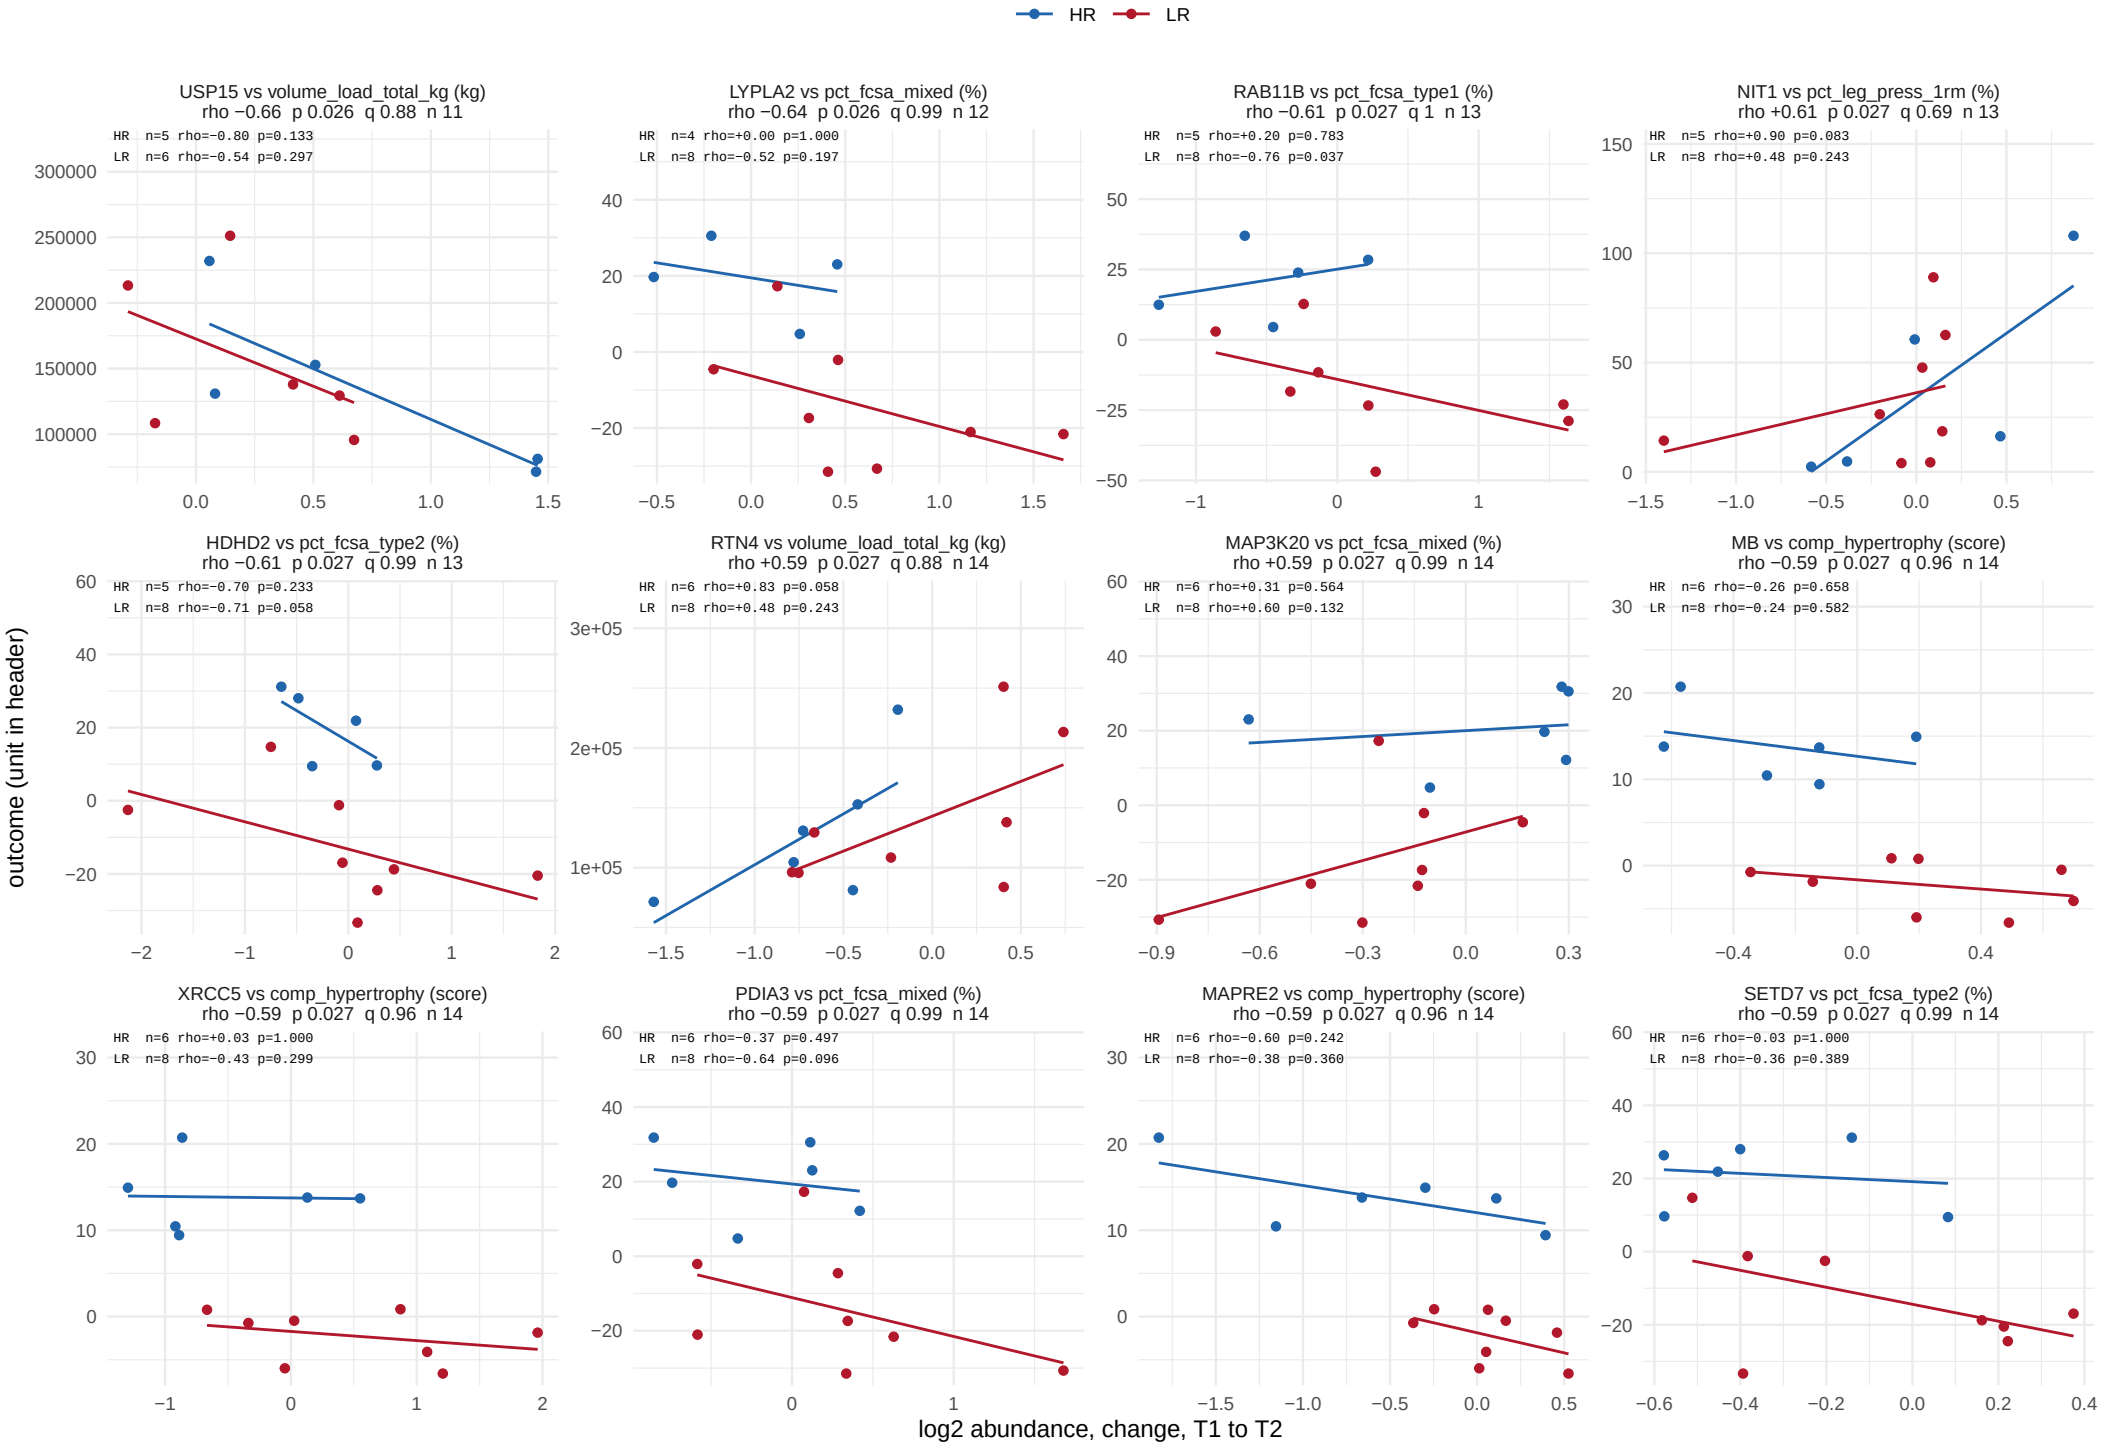

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


467 of 11286 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 21 of 39.

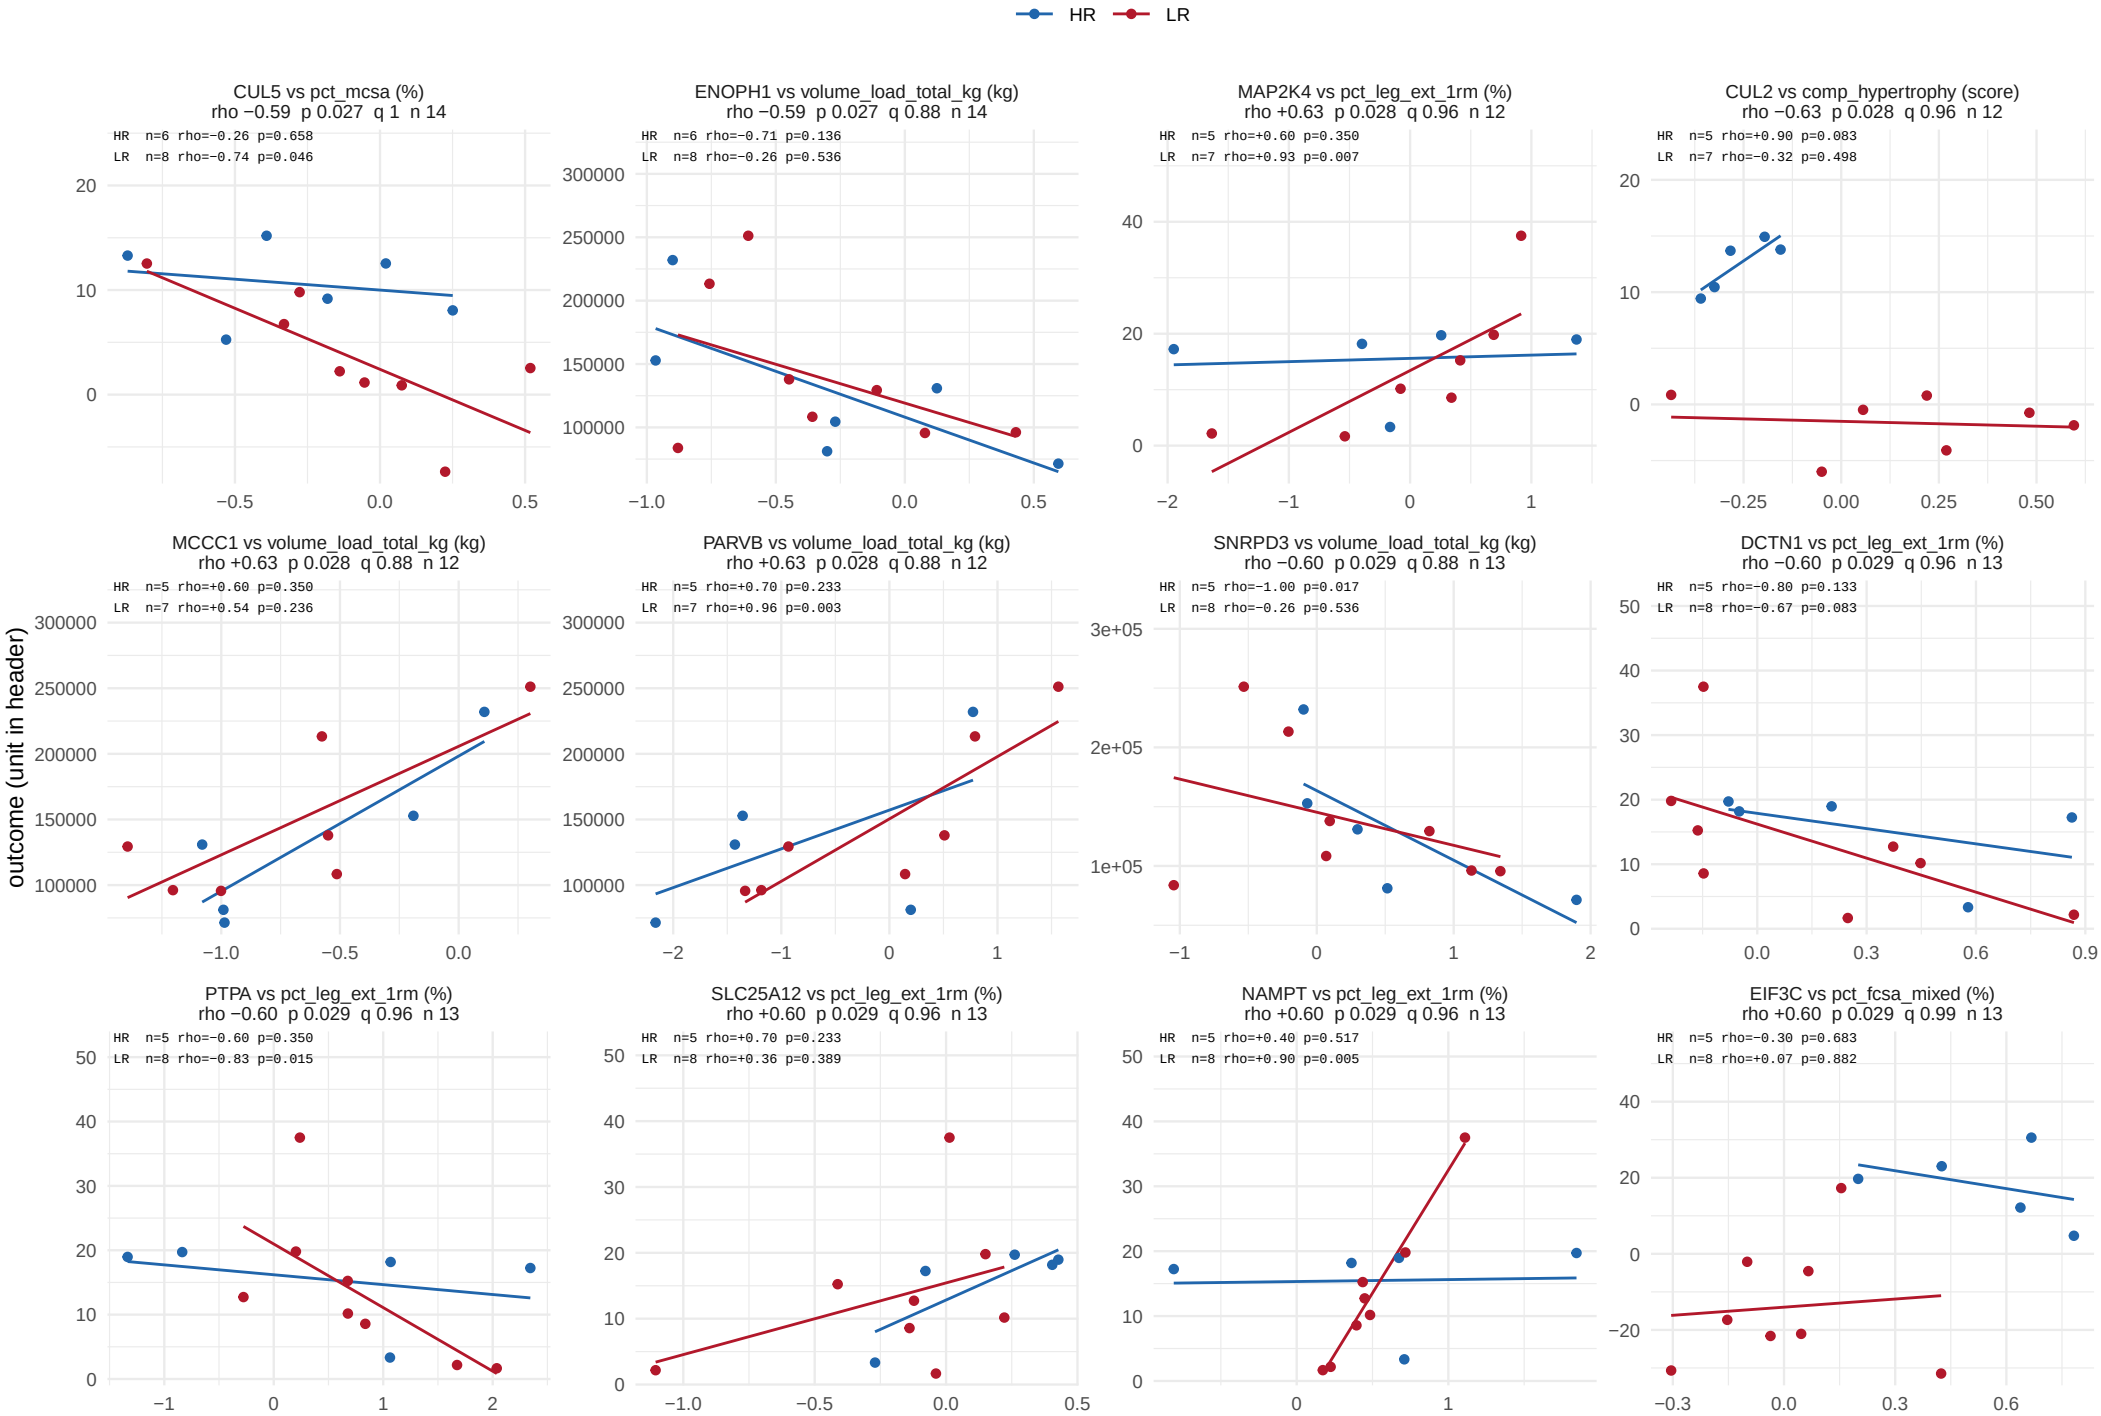

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


467 of 11286 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 22 of 39.

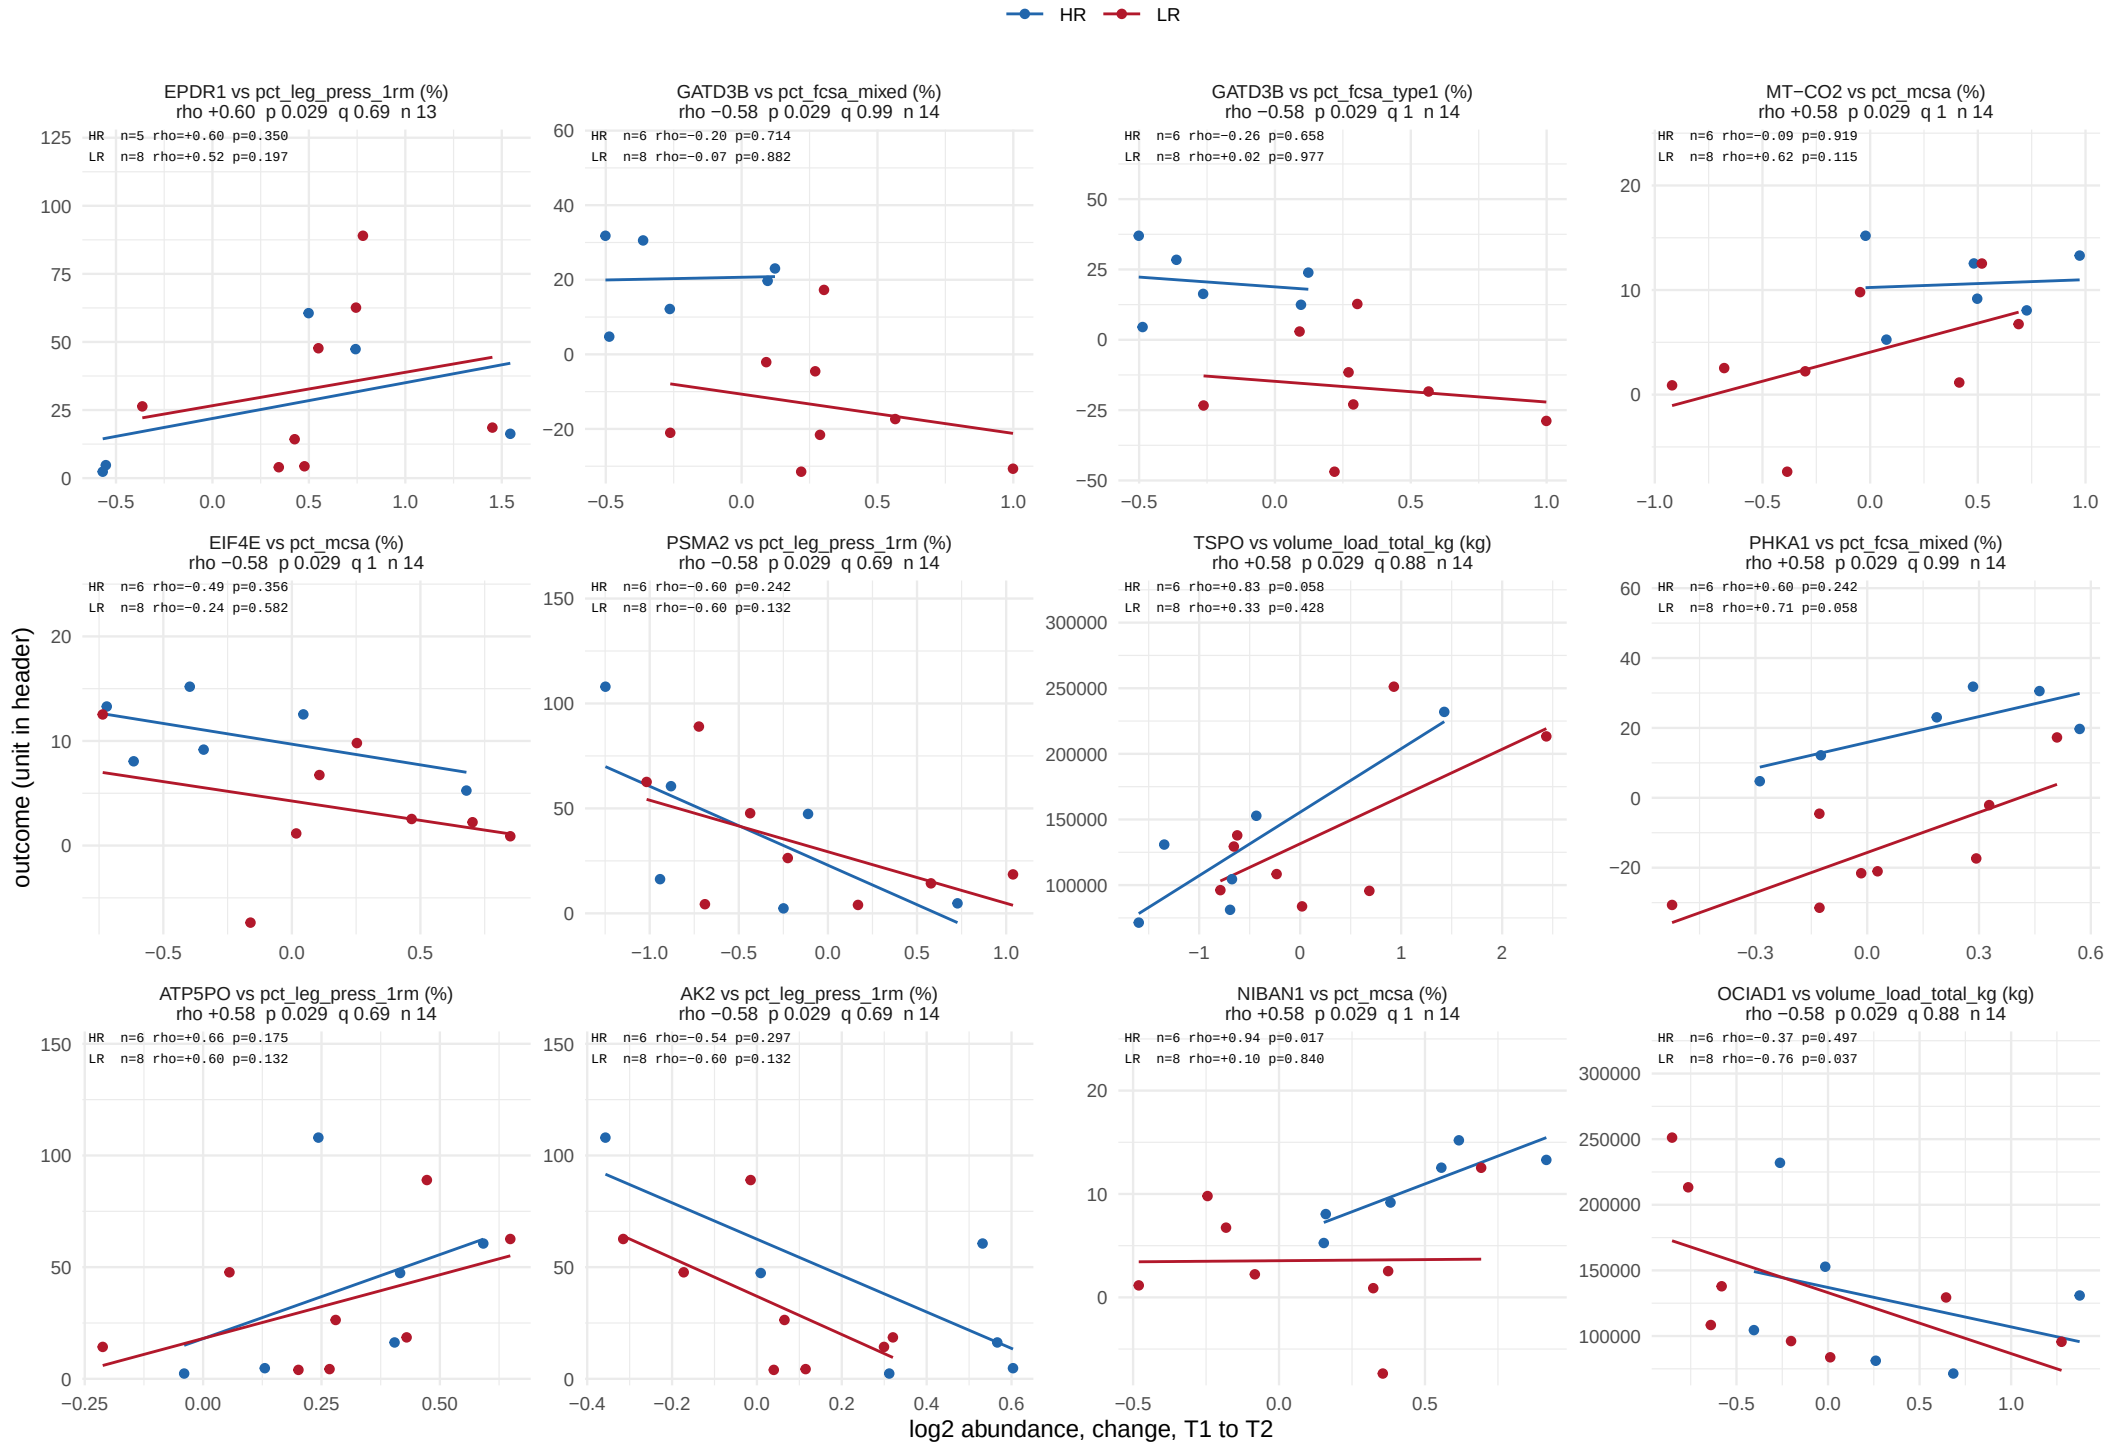

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


467 of 11286 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 23 of 39.

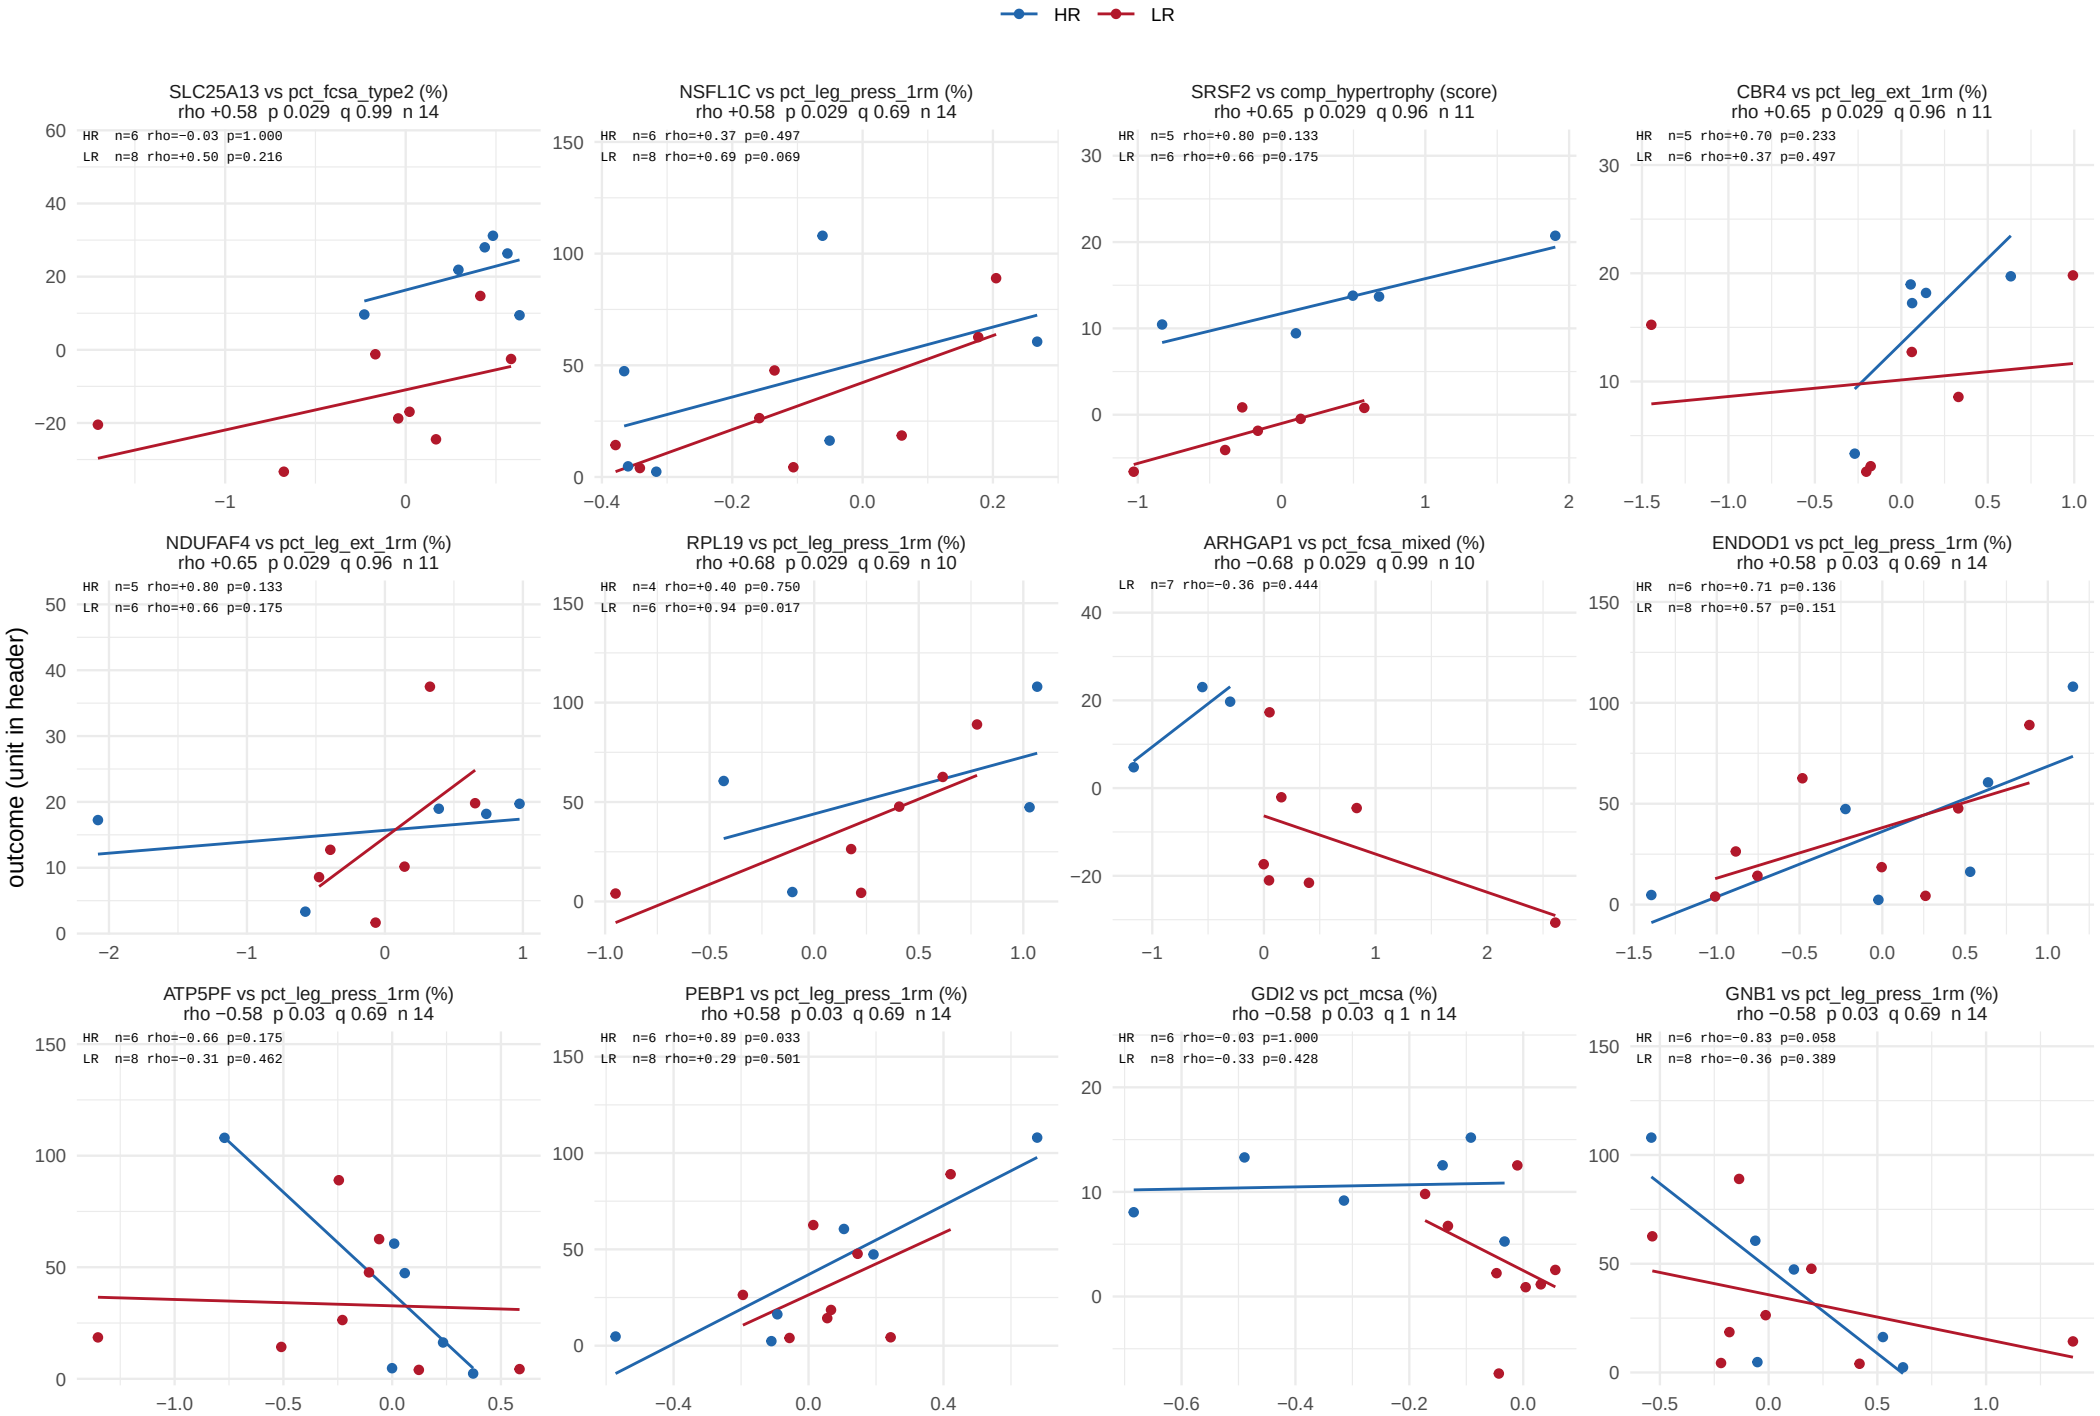

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


467 of 11286 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 24 of 39.

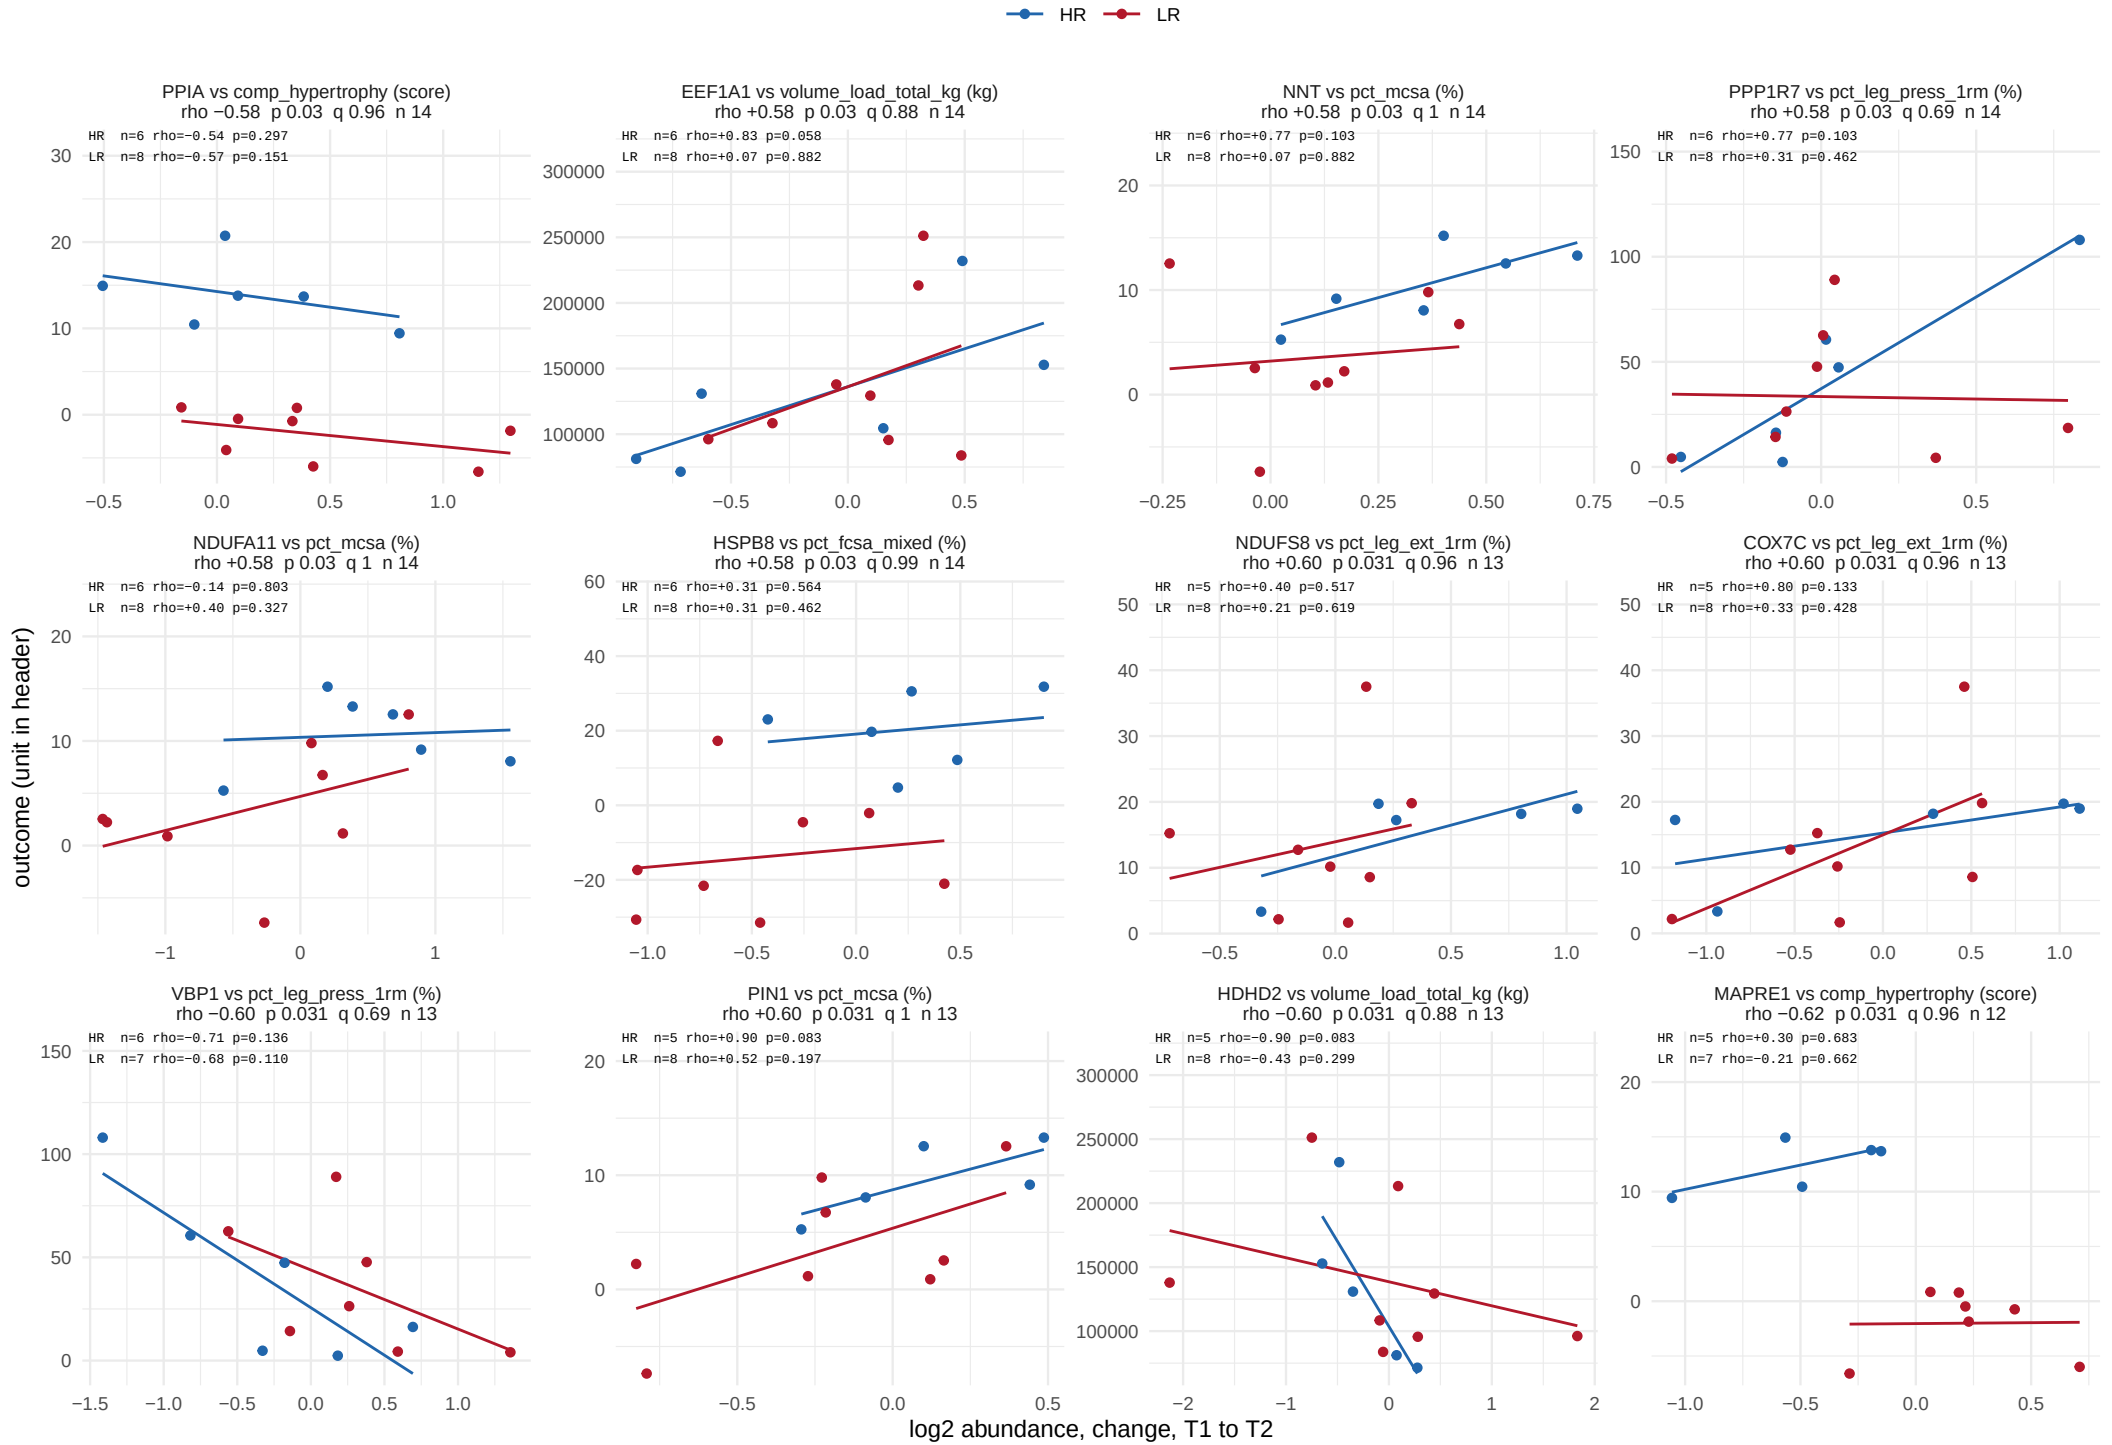

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


467 of 11286 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 25 of 39.

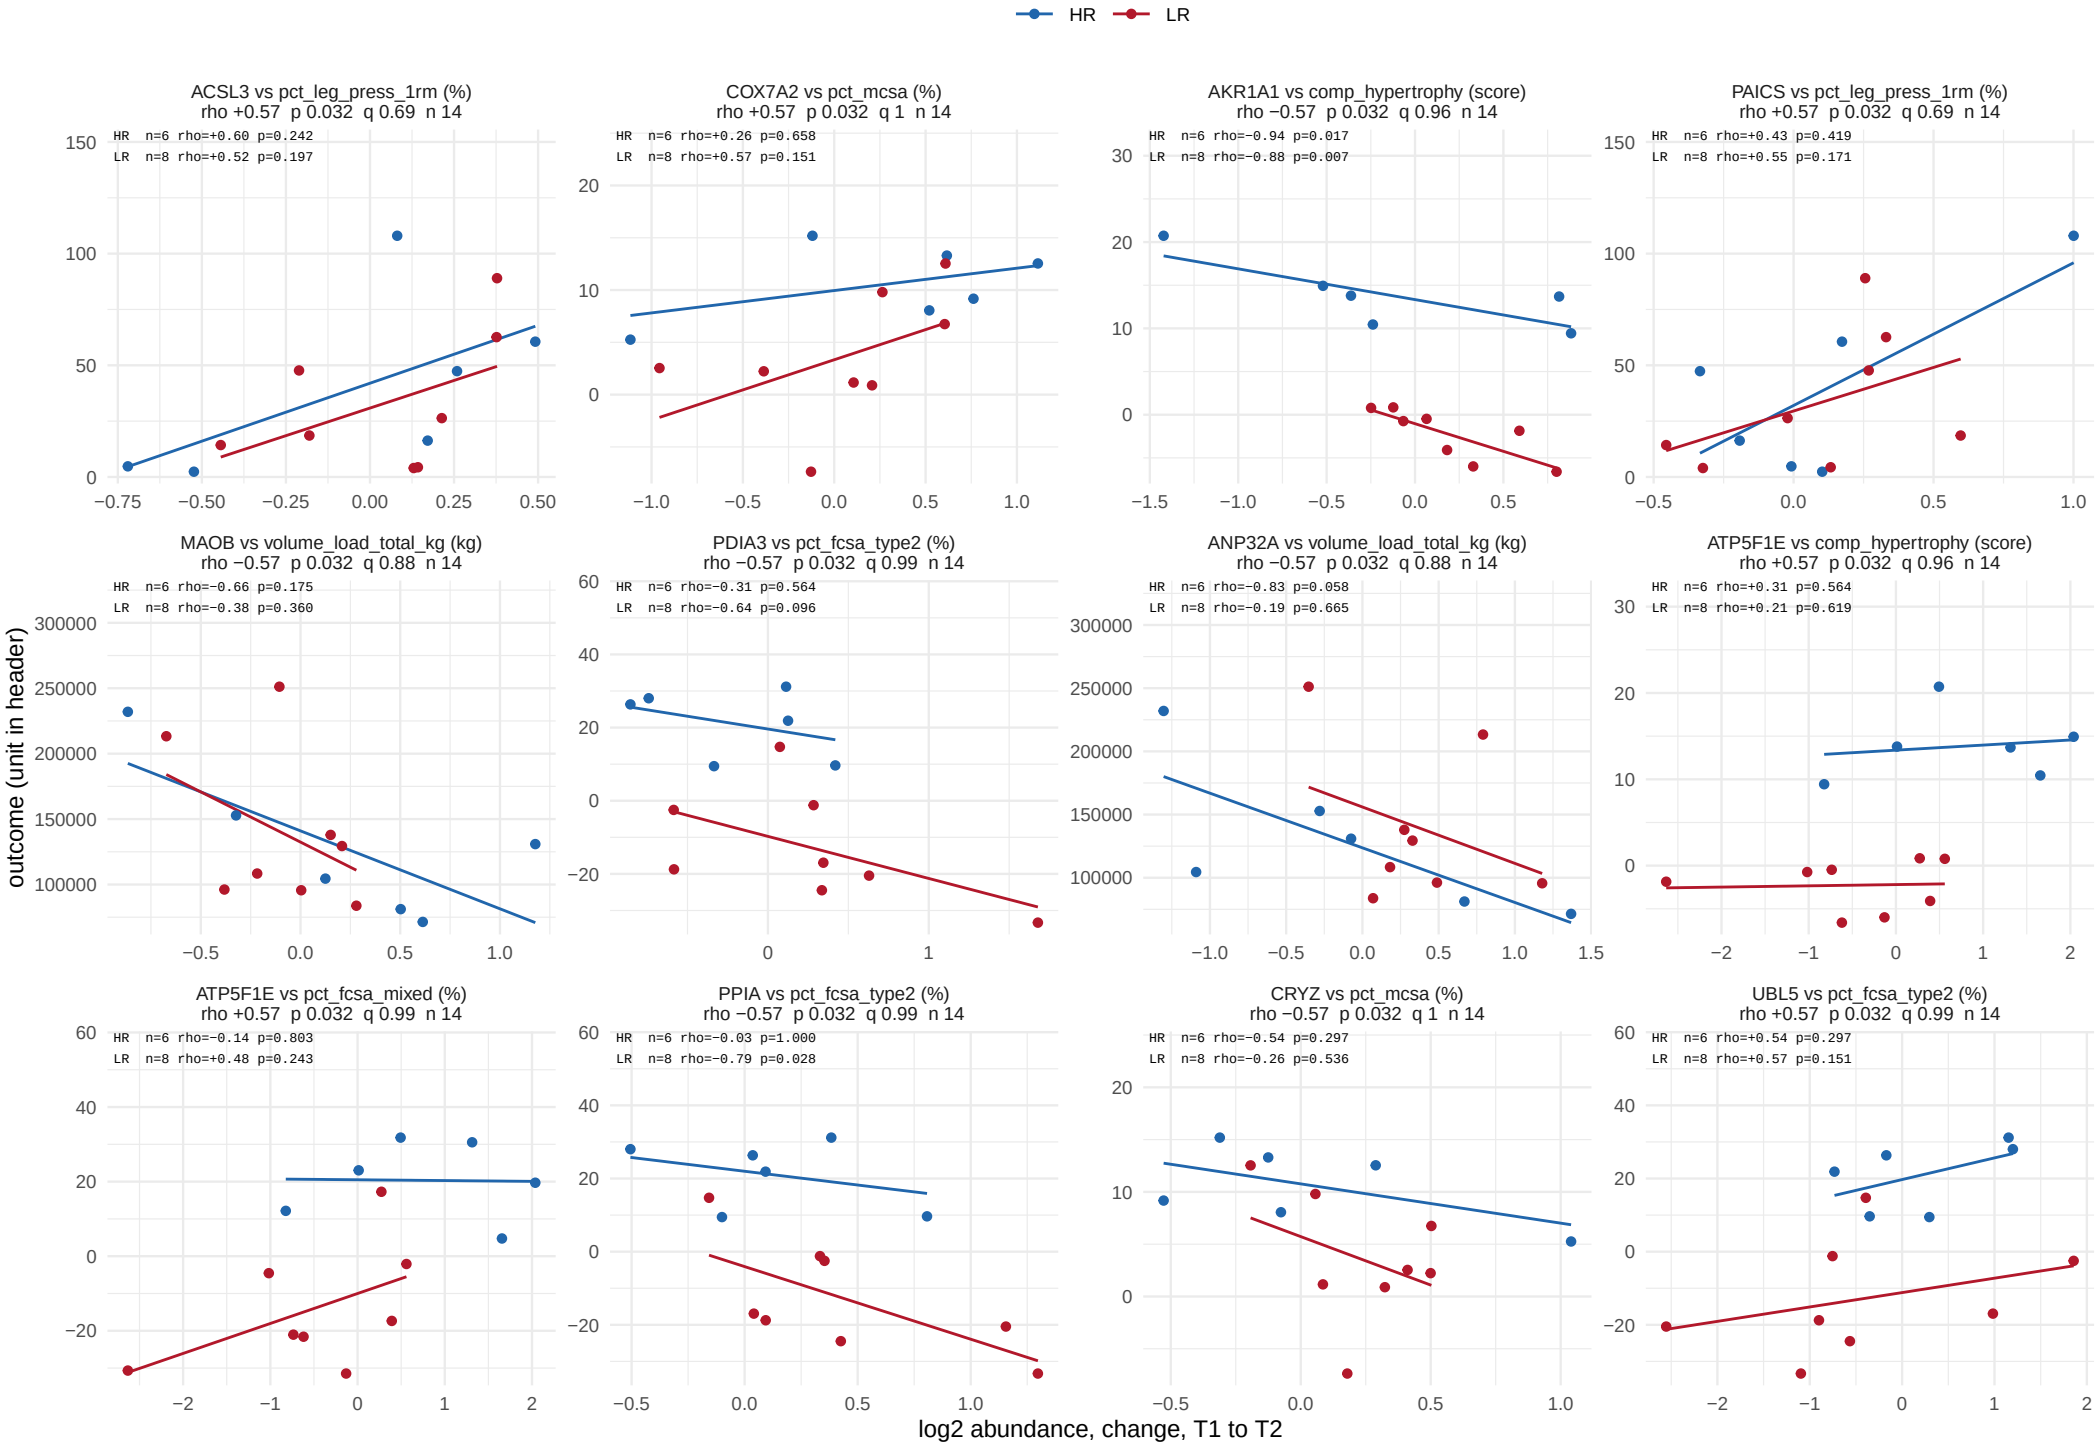

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


467 of 11286 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 26 of 39.

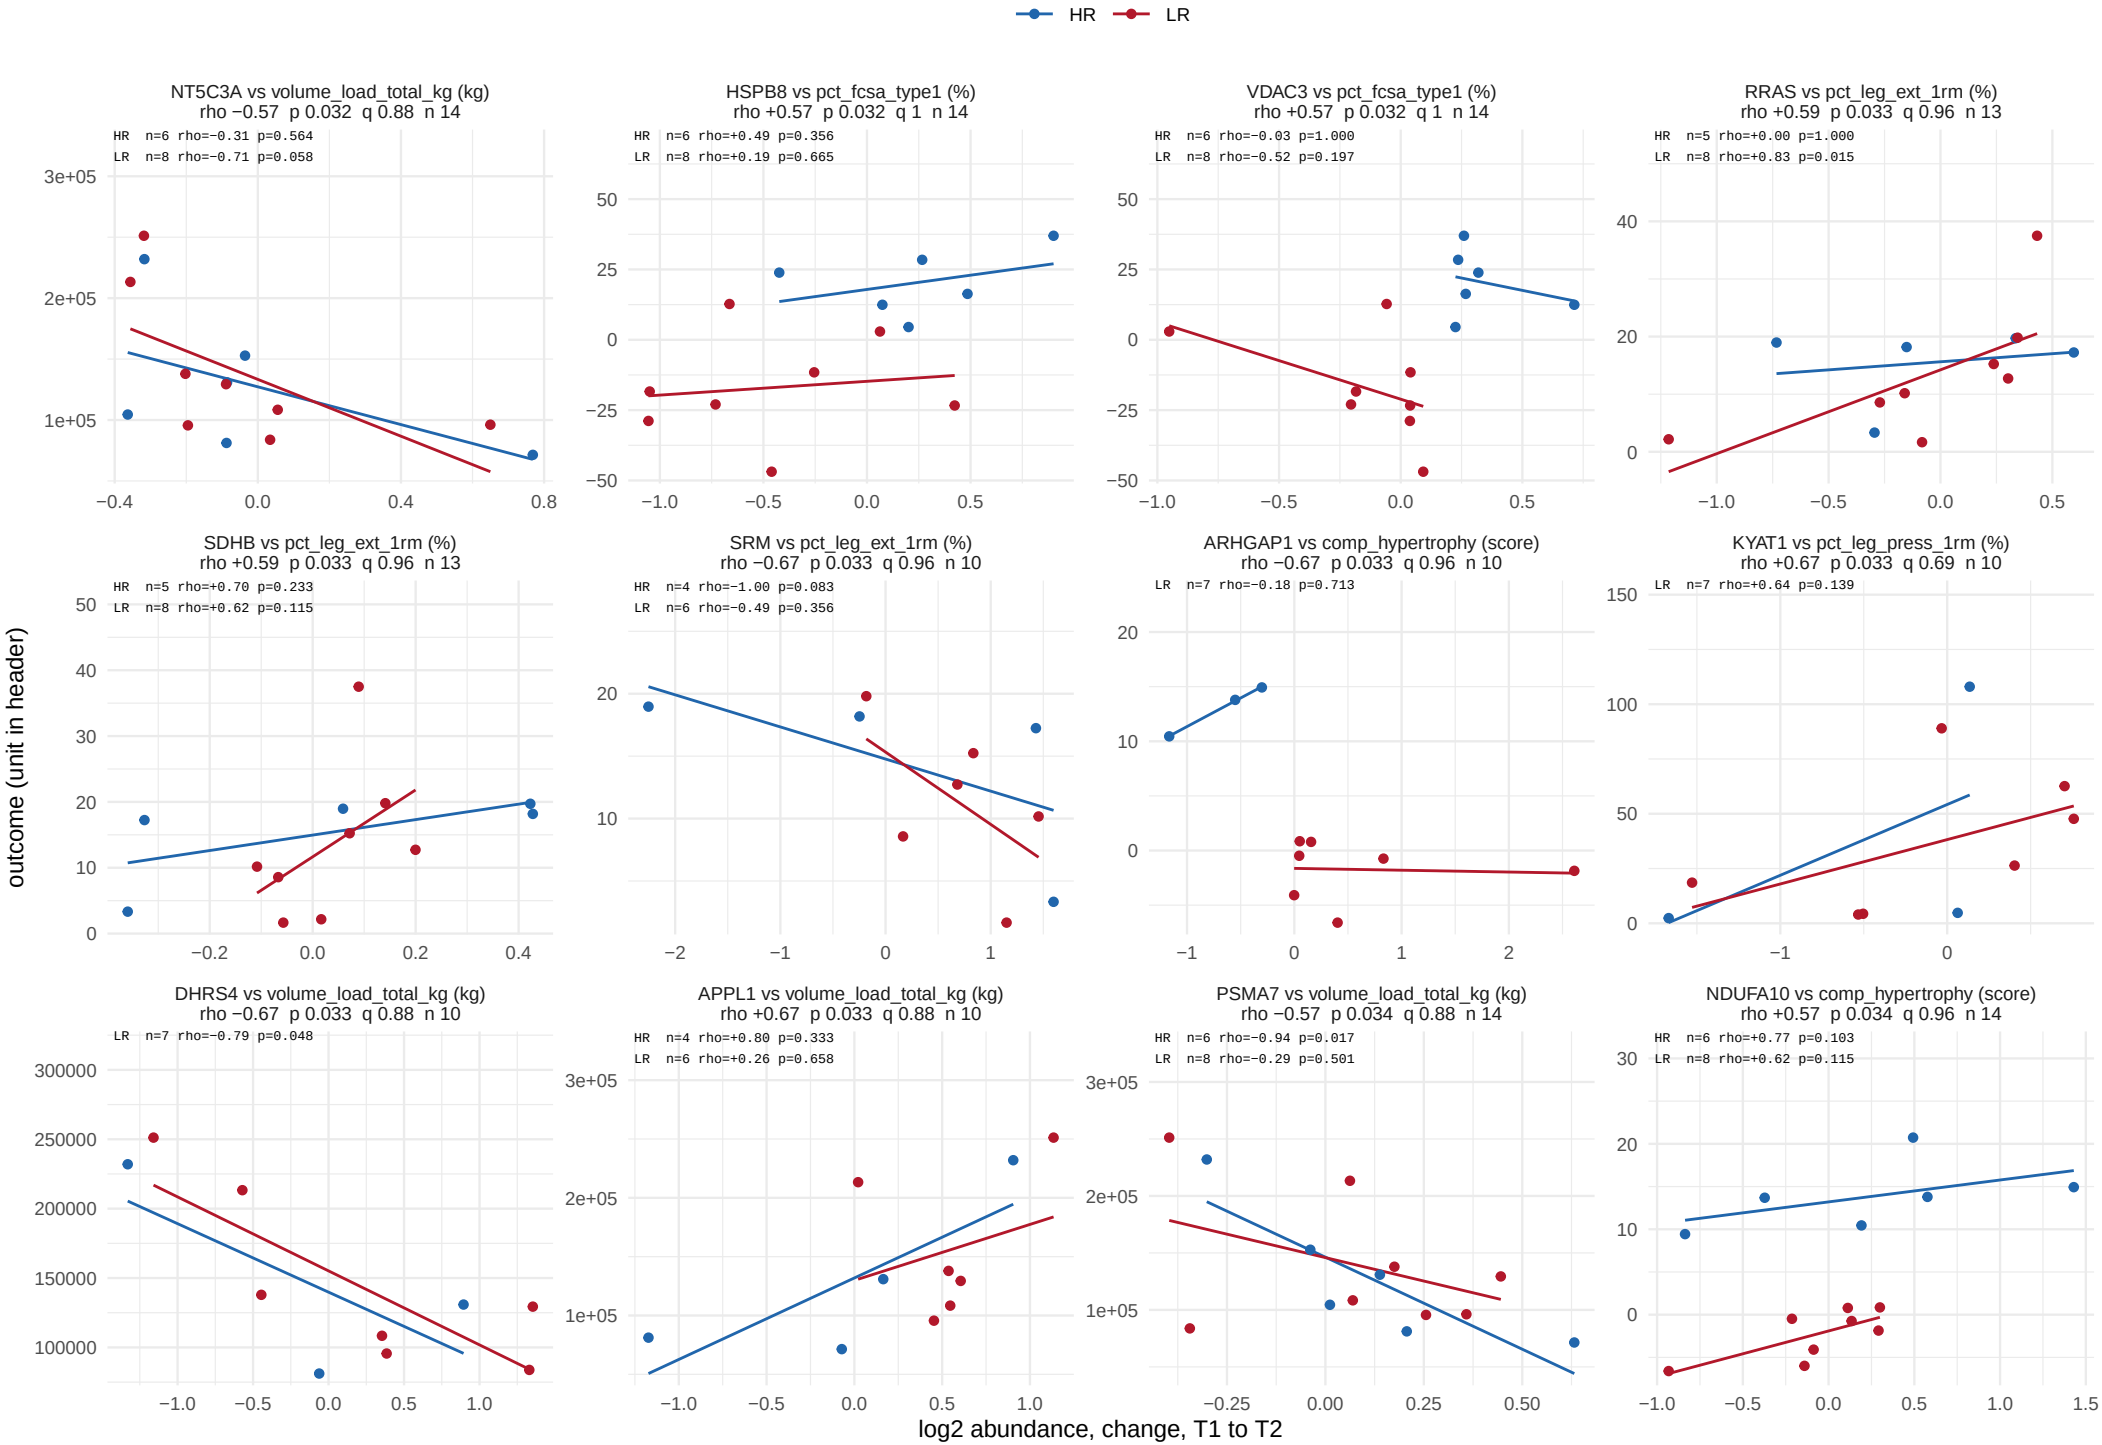

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


467 of 11286 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 27 of 39.

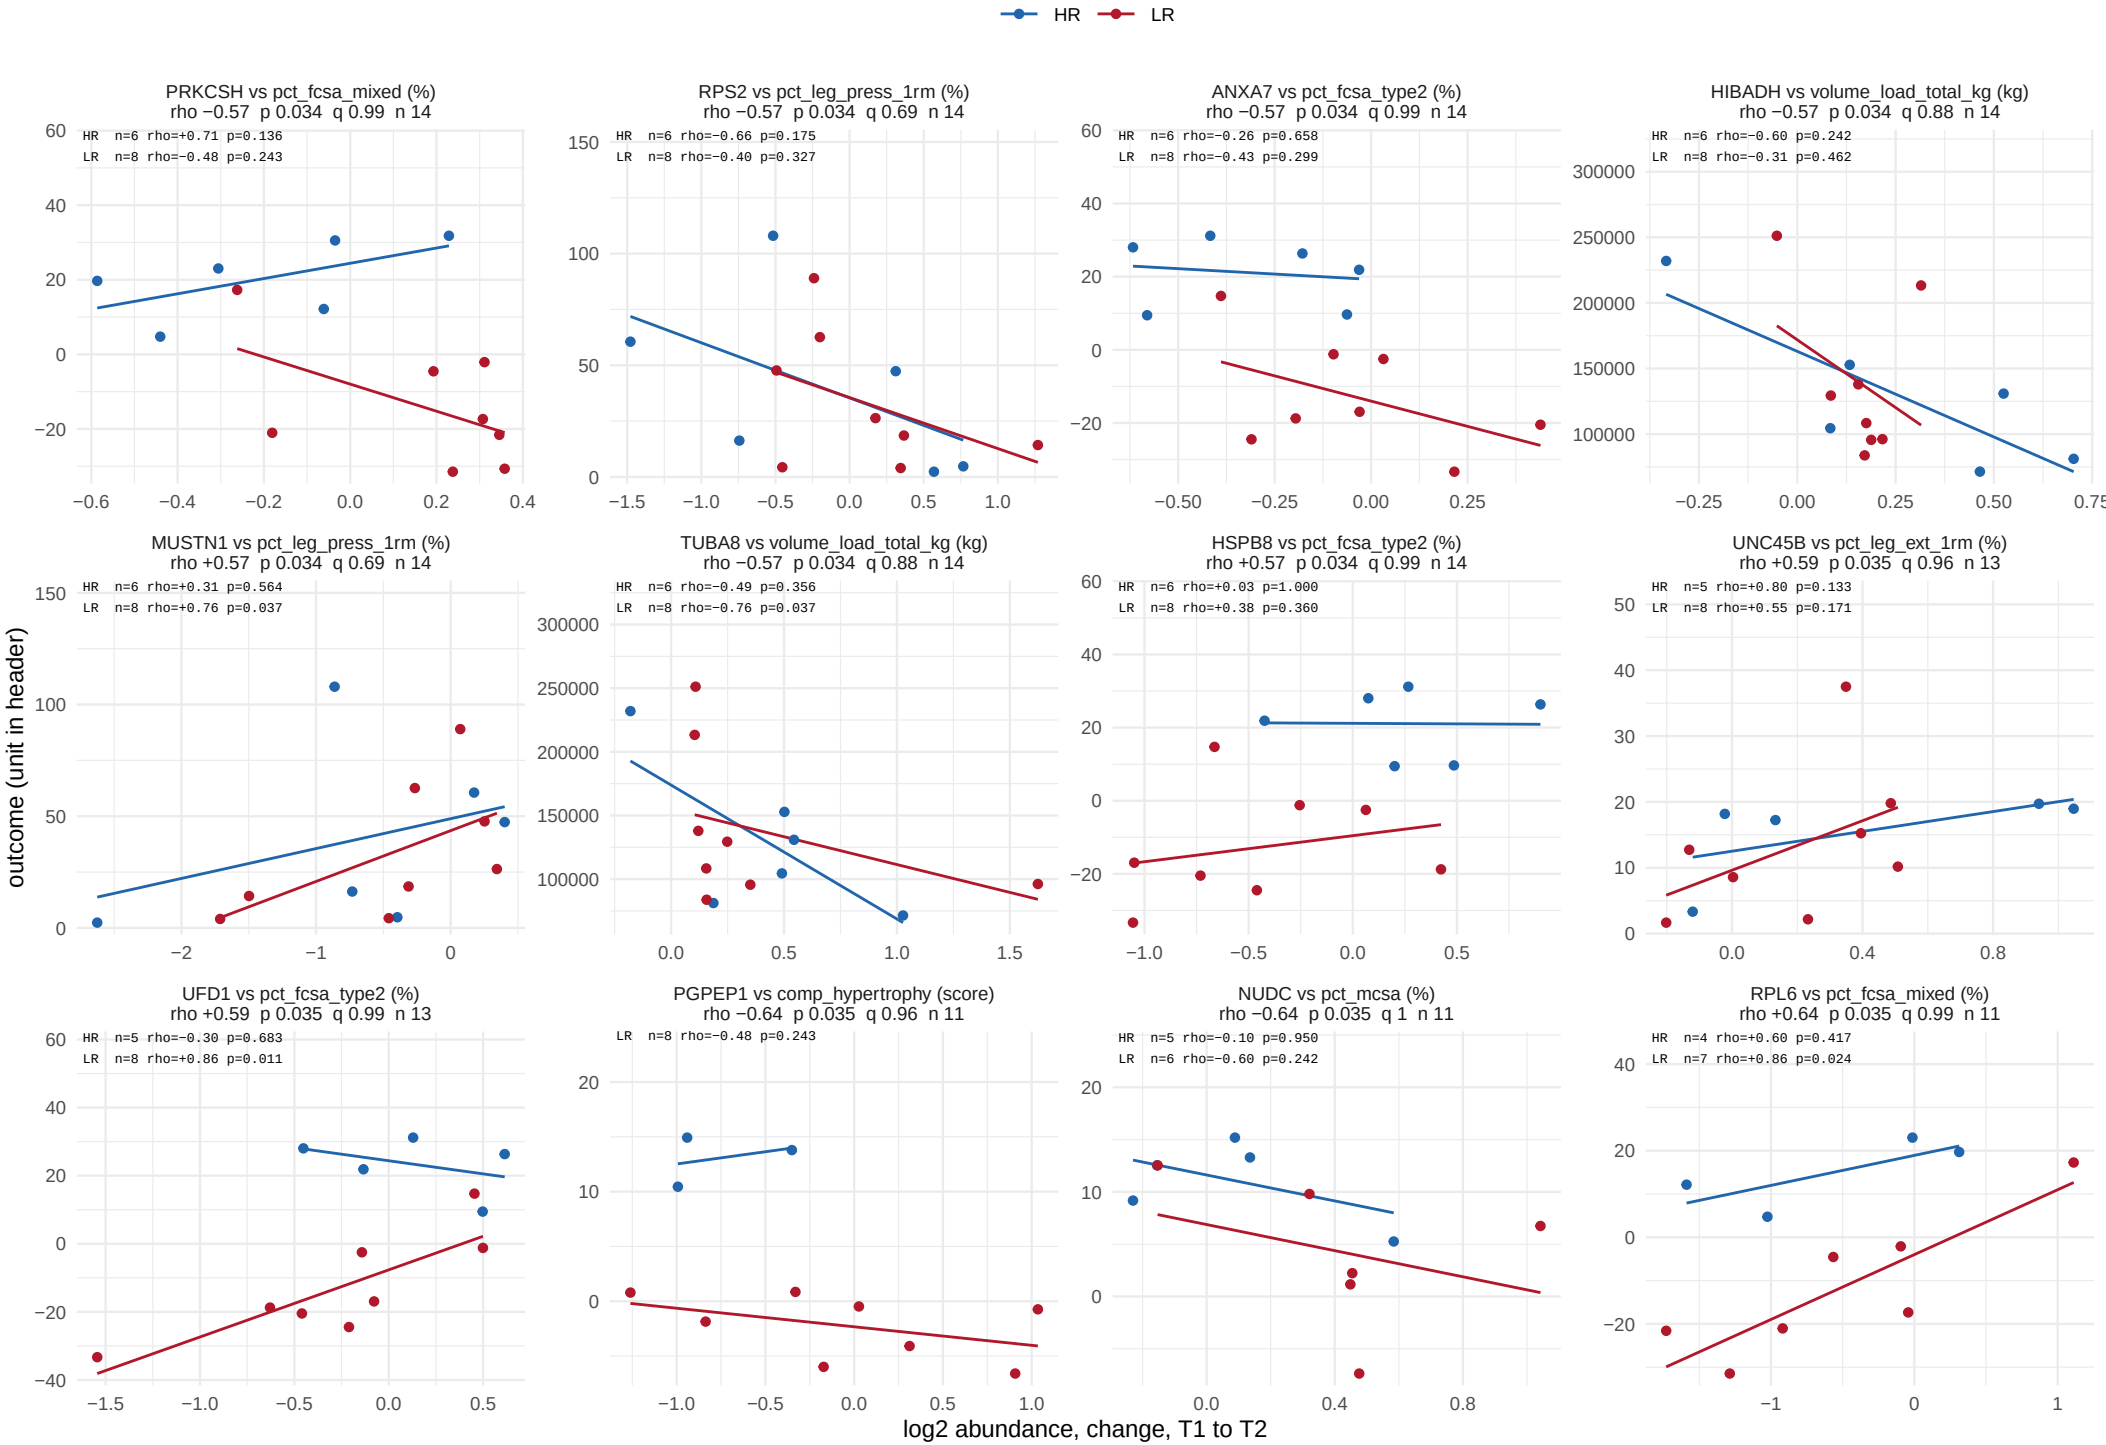

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


467 of 11286 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 28 of 39.

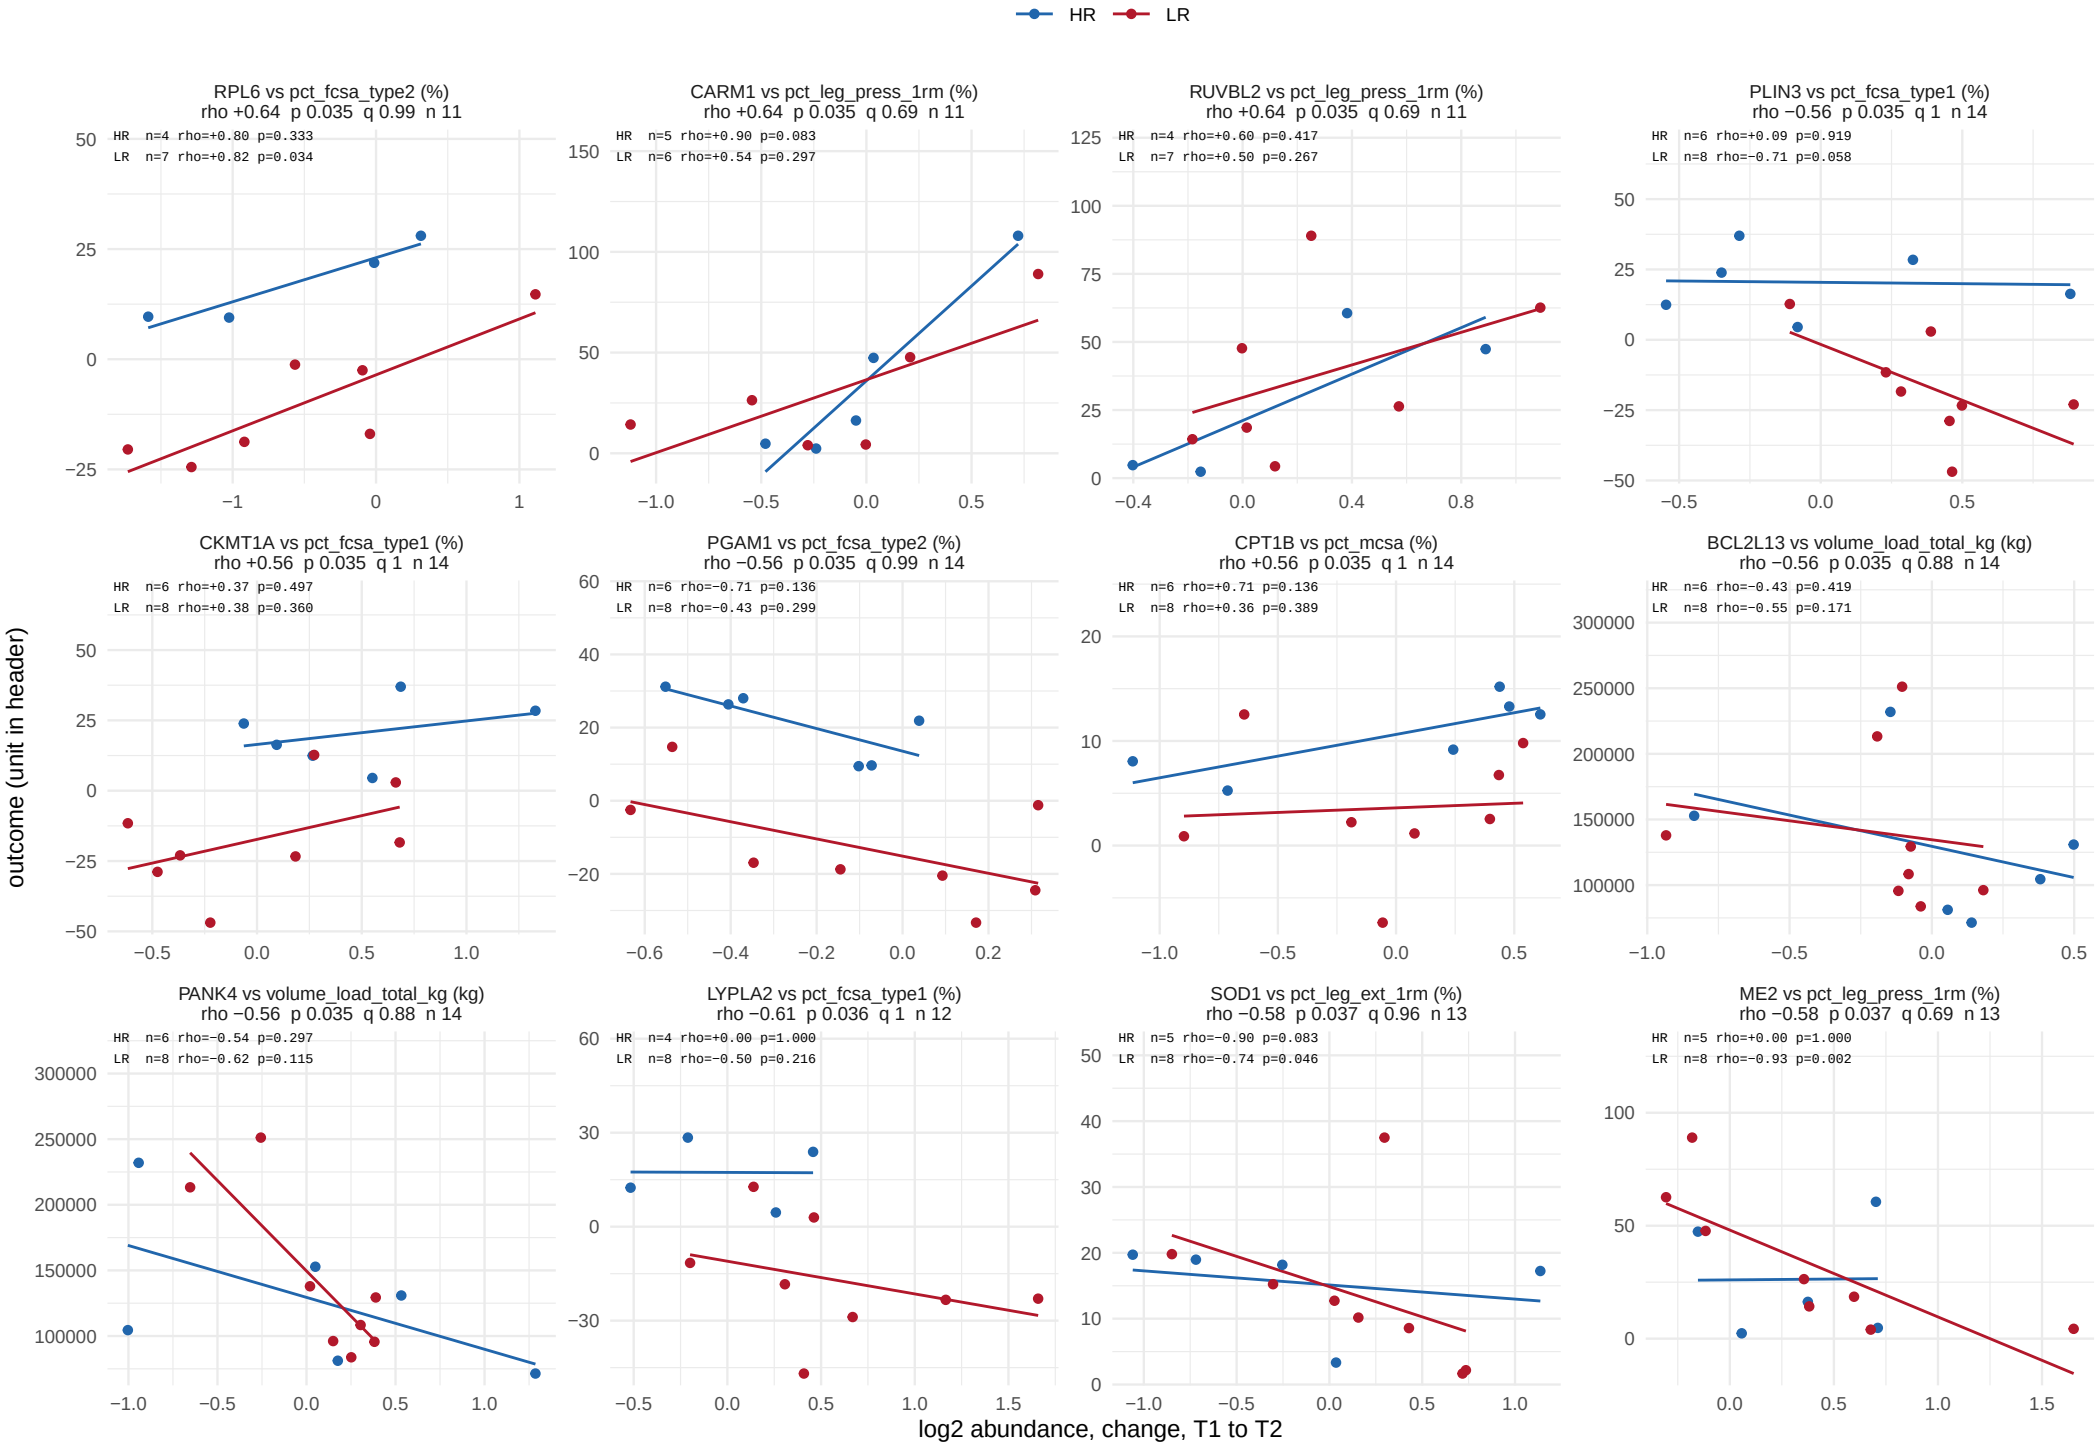

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


467 of 11286 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 29 of 39.

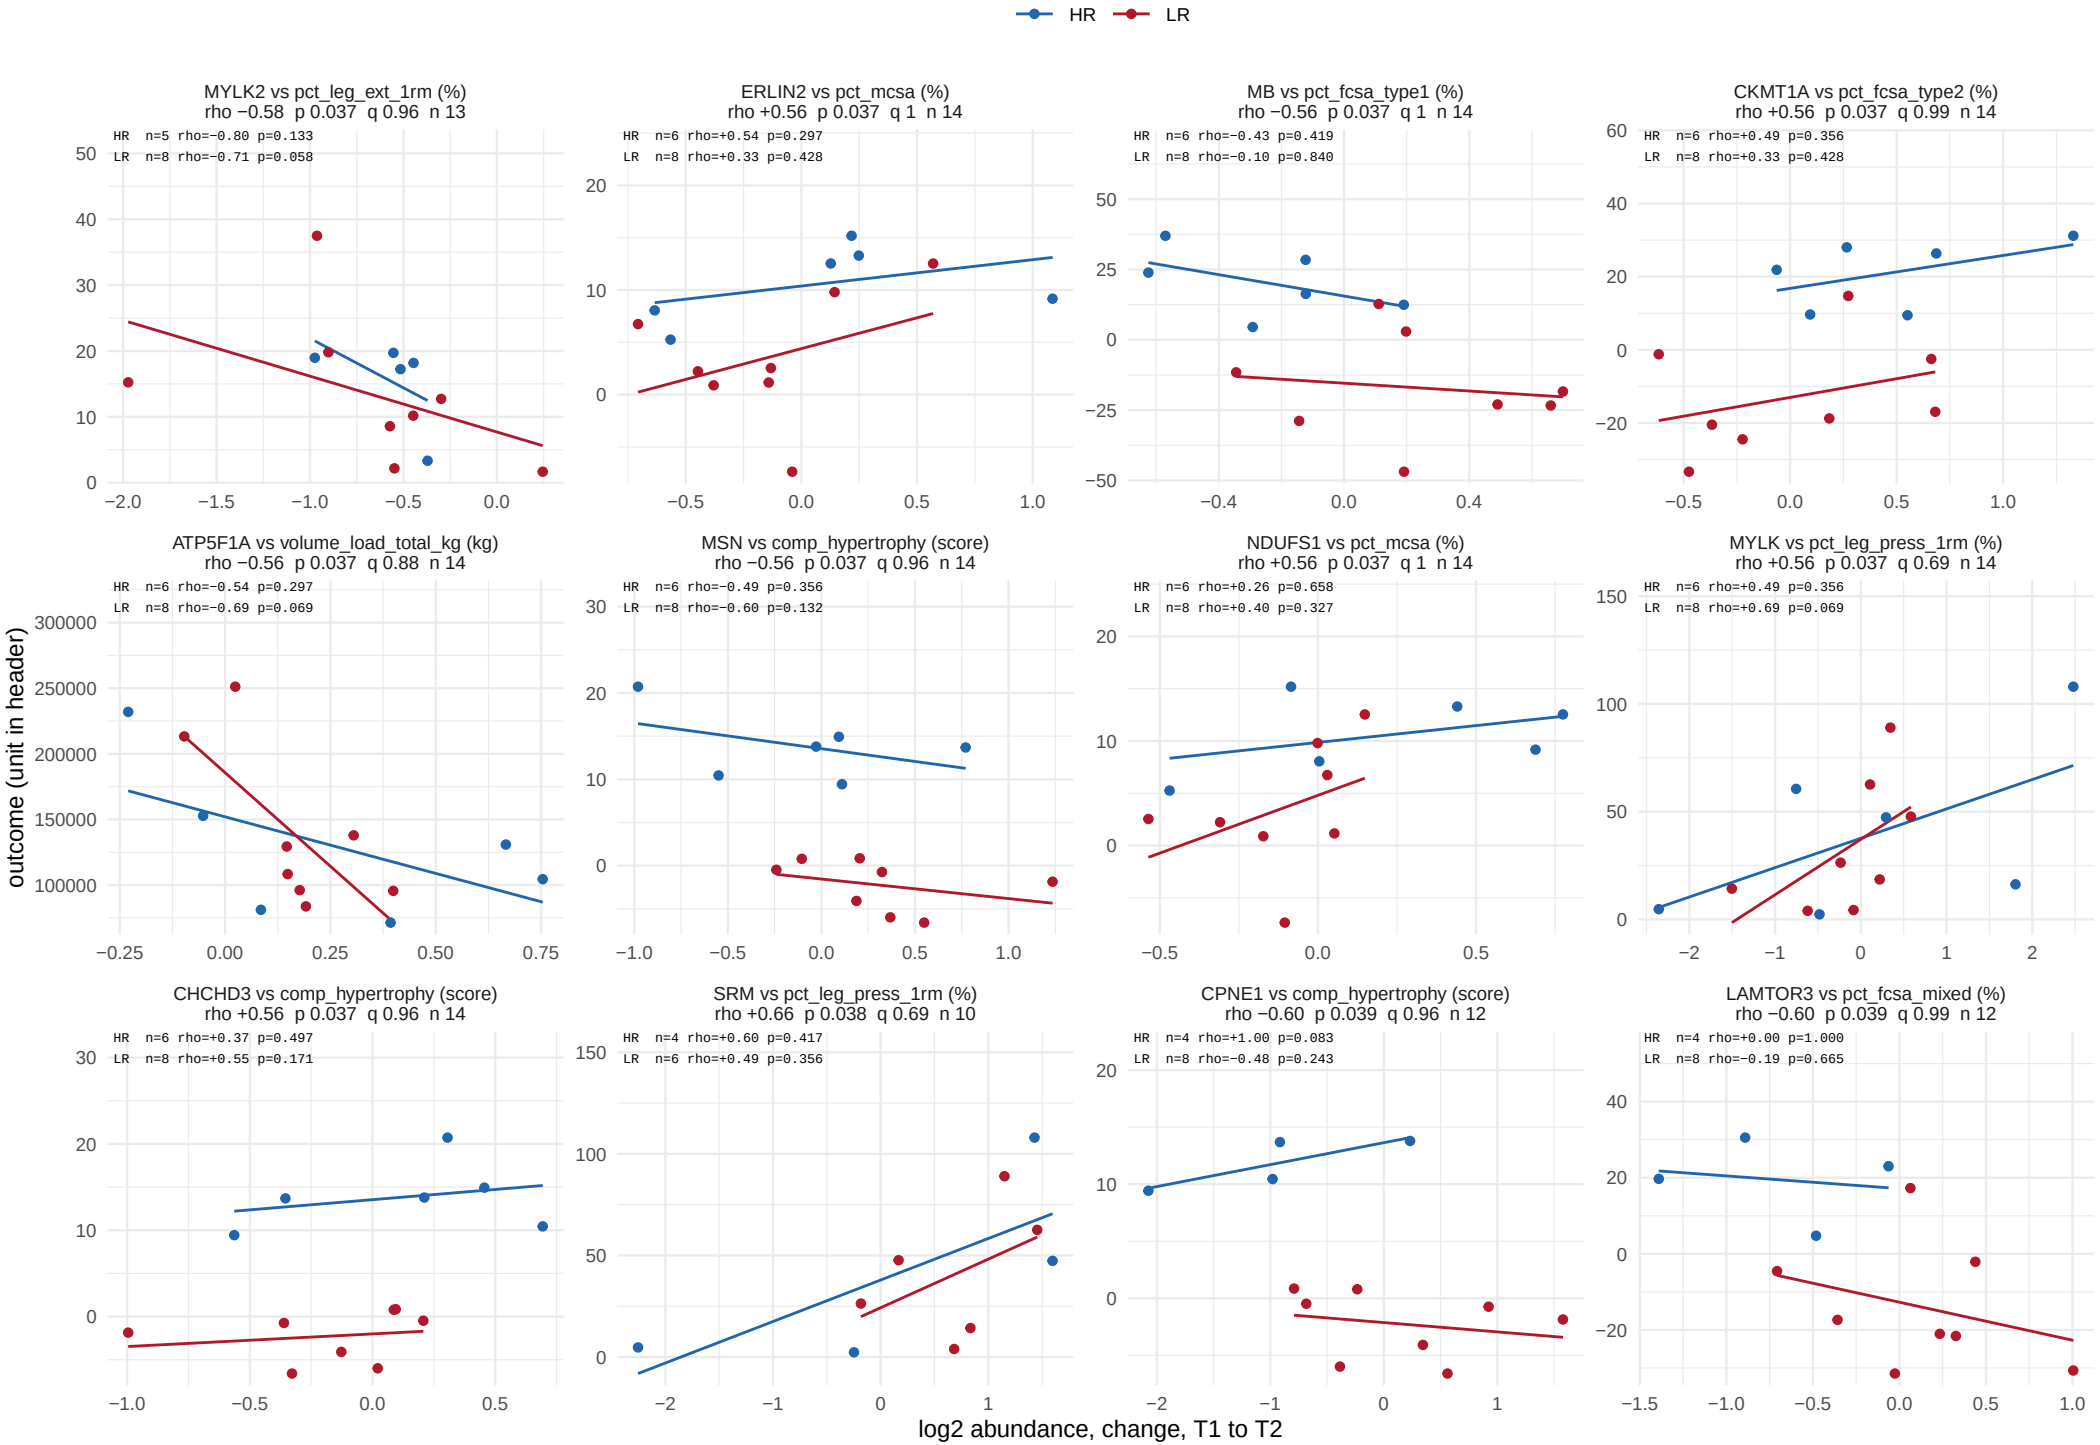

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


467 of 11286 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 30 of 39.

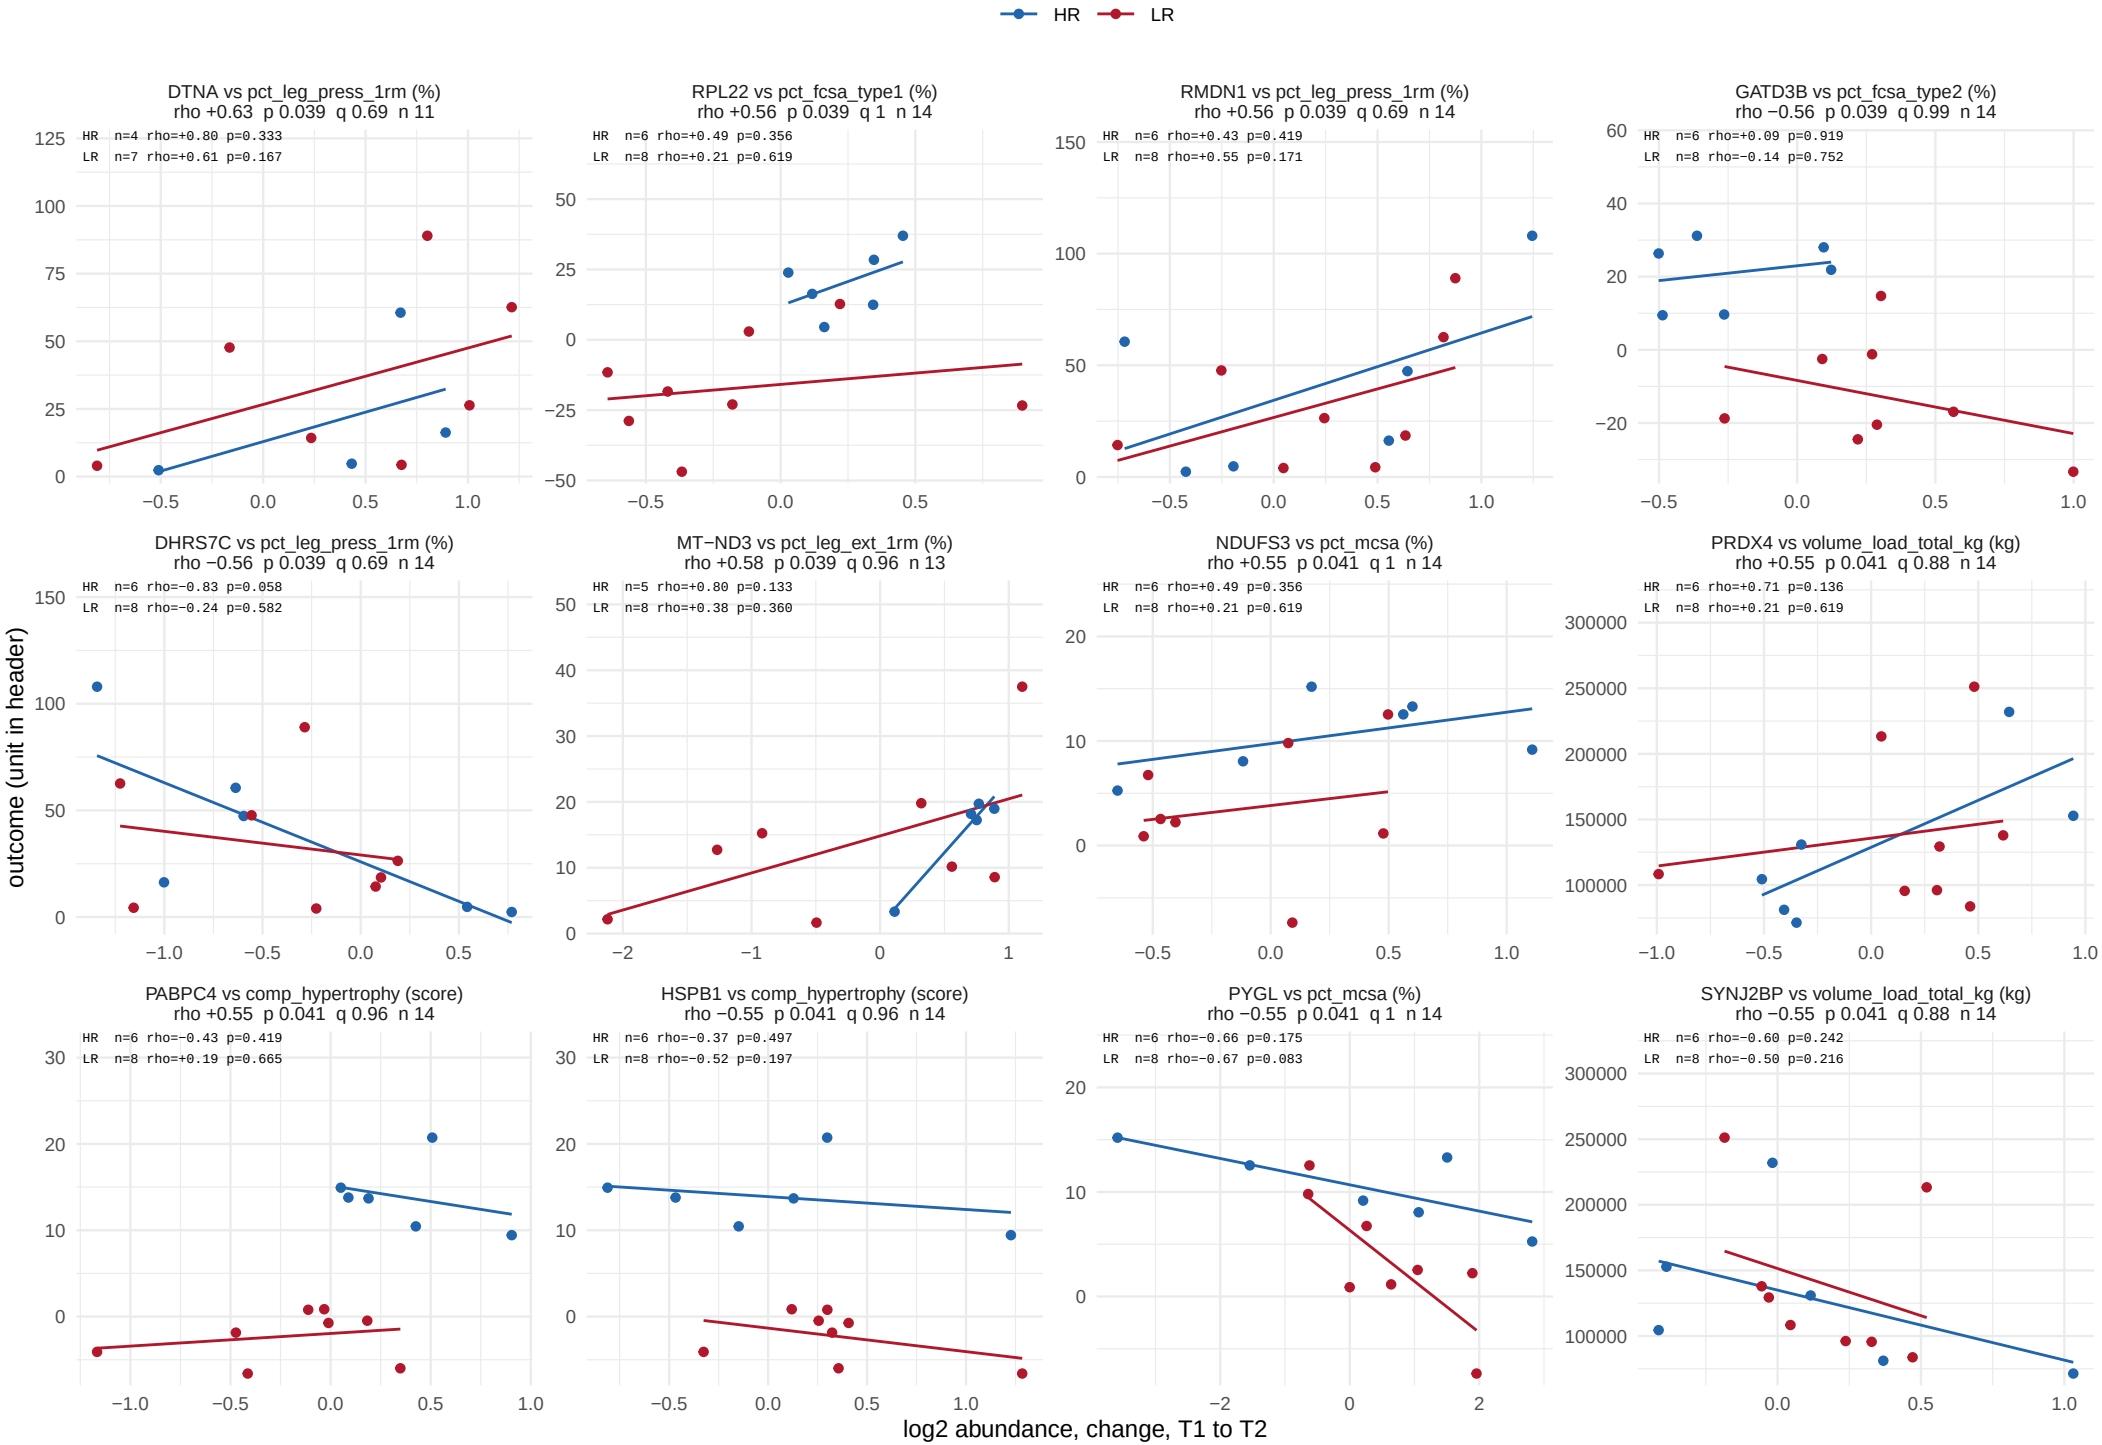

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


467 of 11286 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 31 of 39.

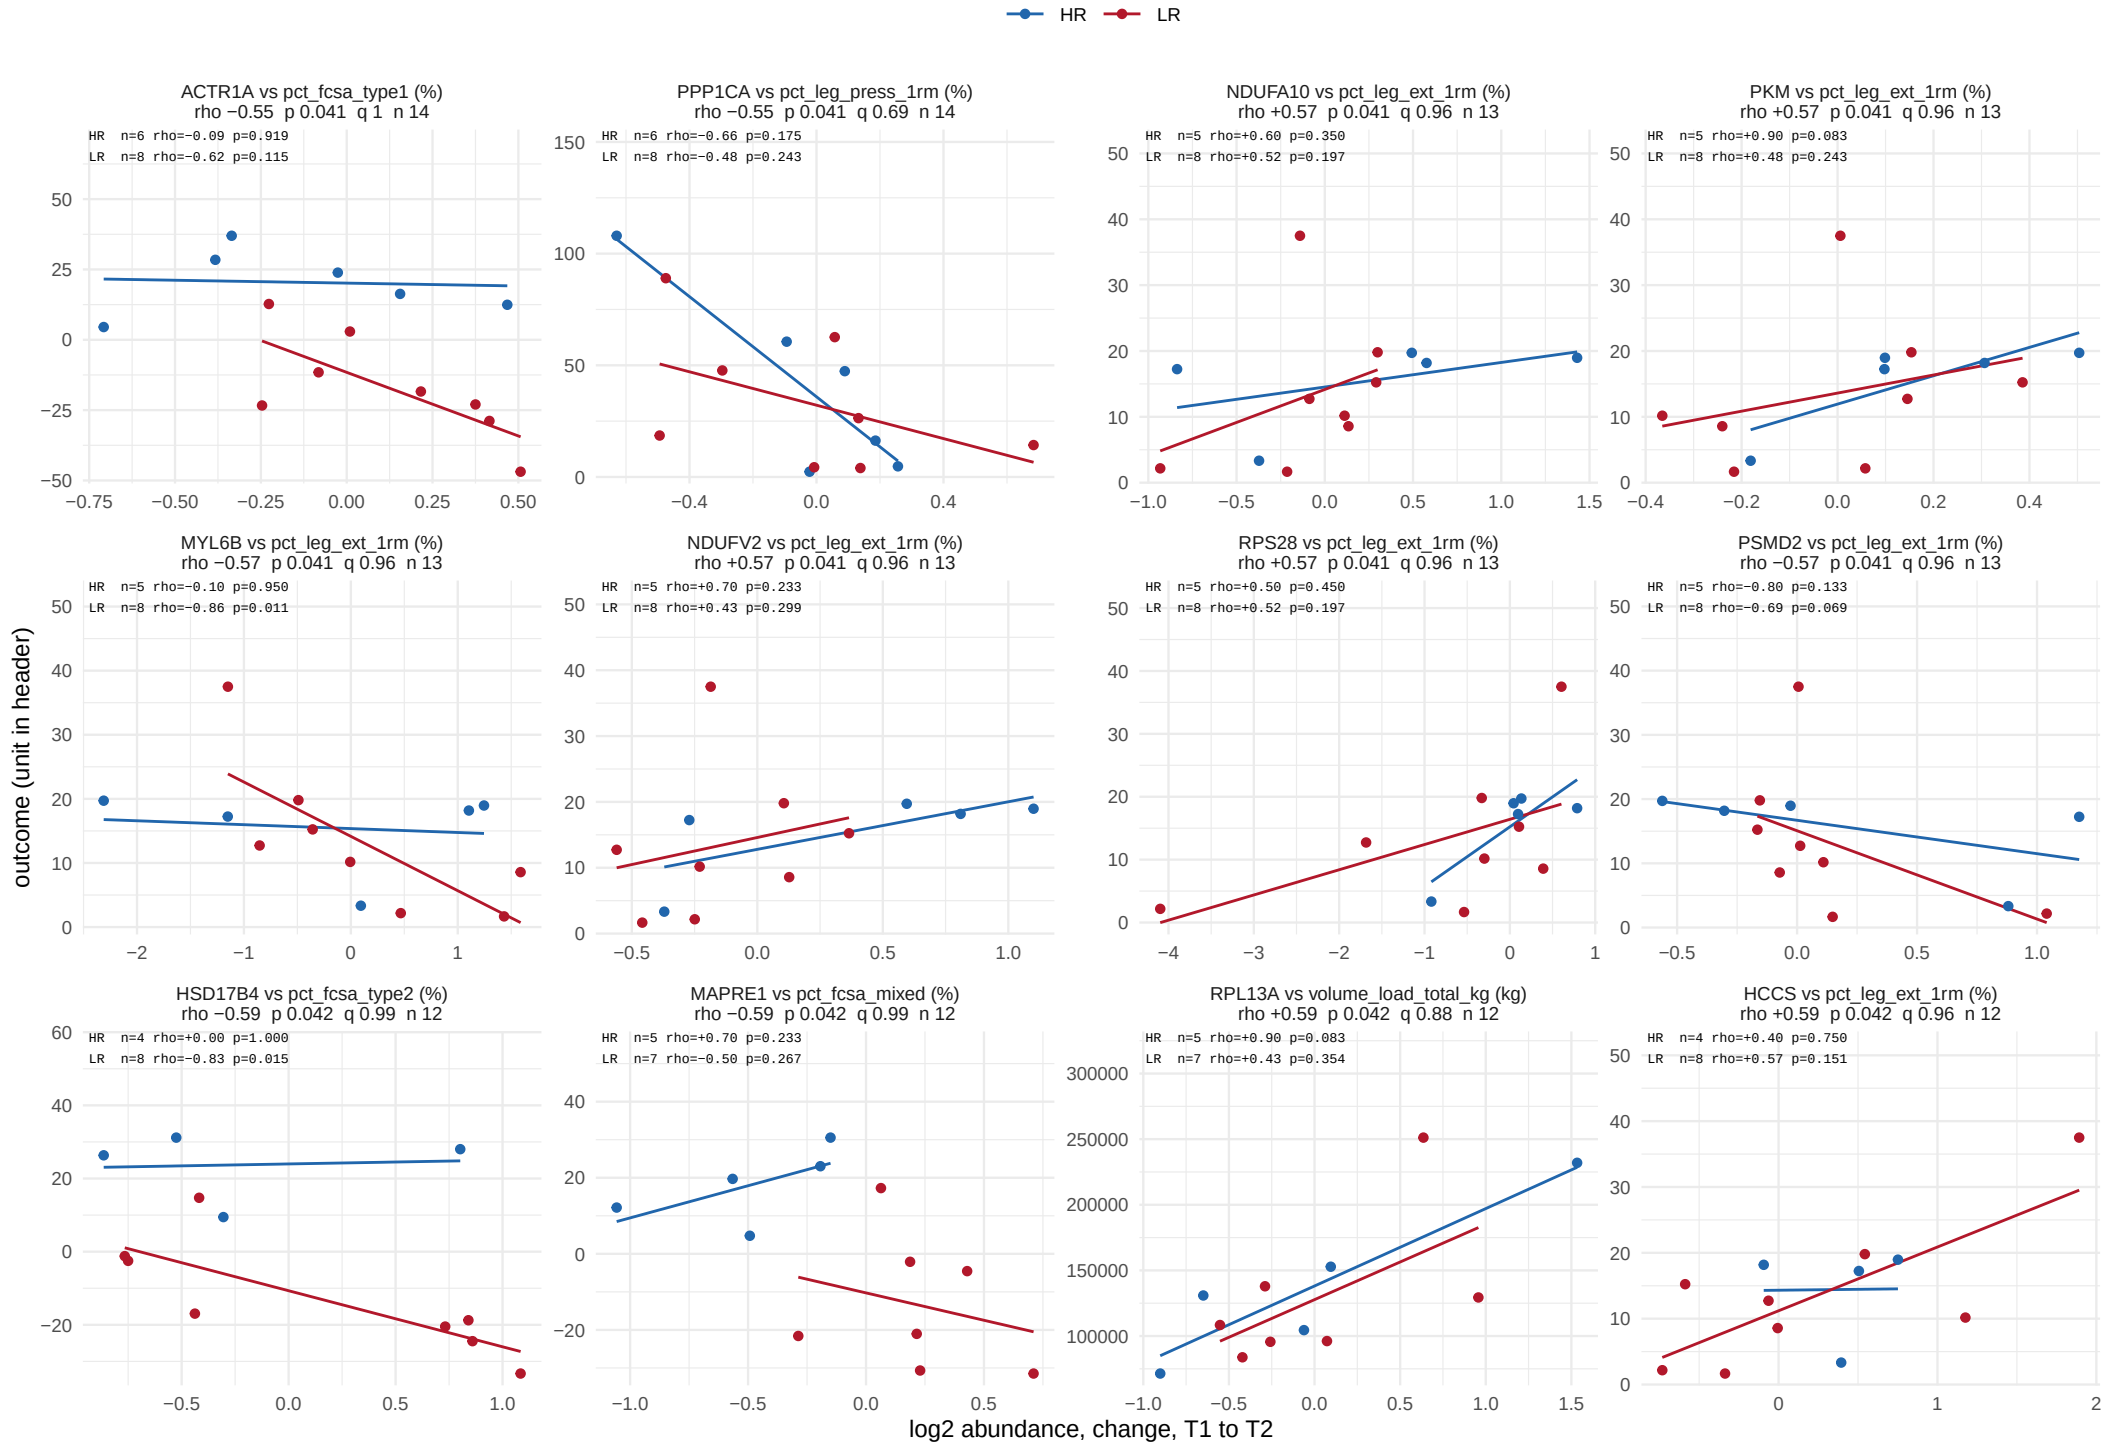

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


467 of 11286 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 32 of 39.

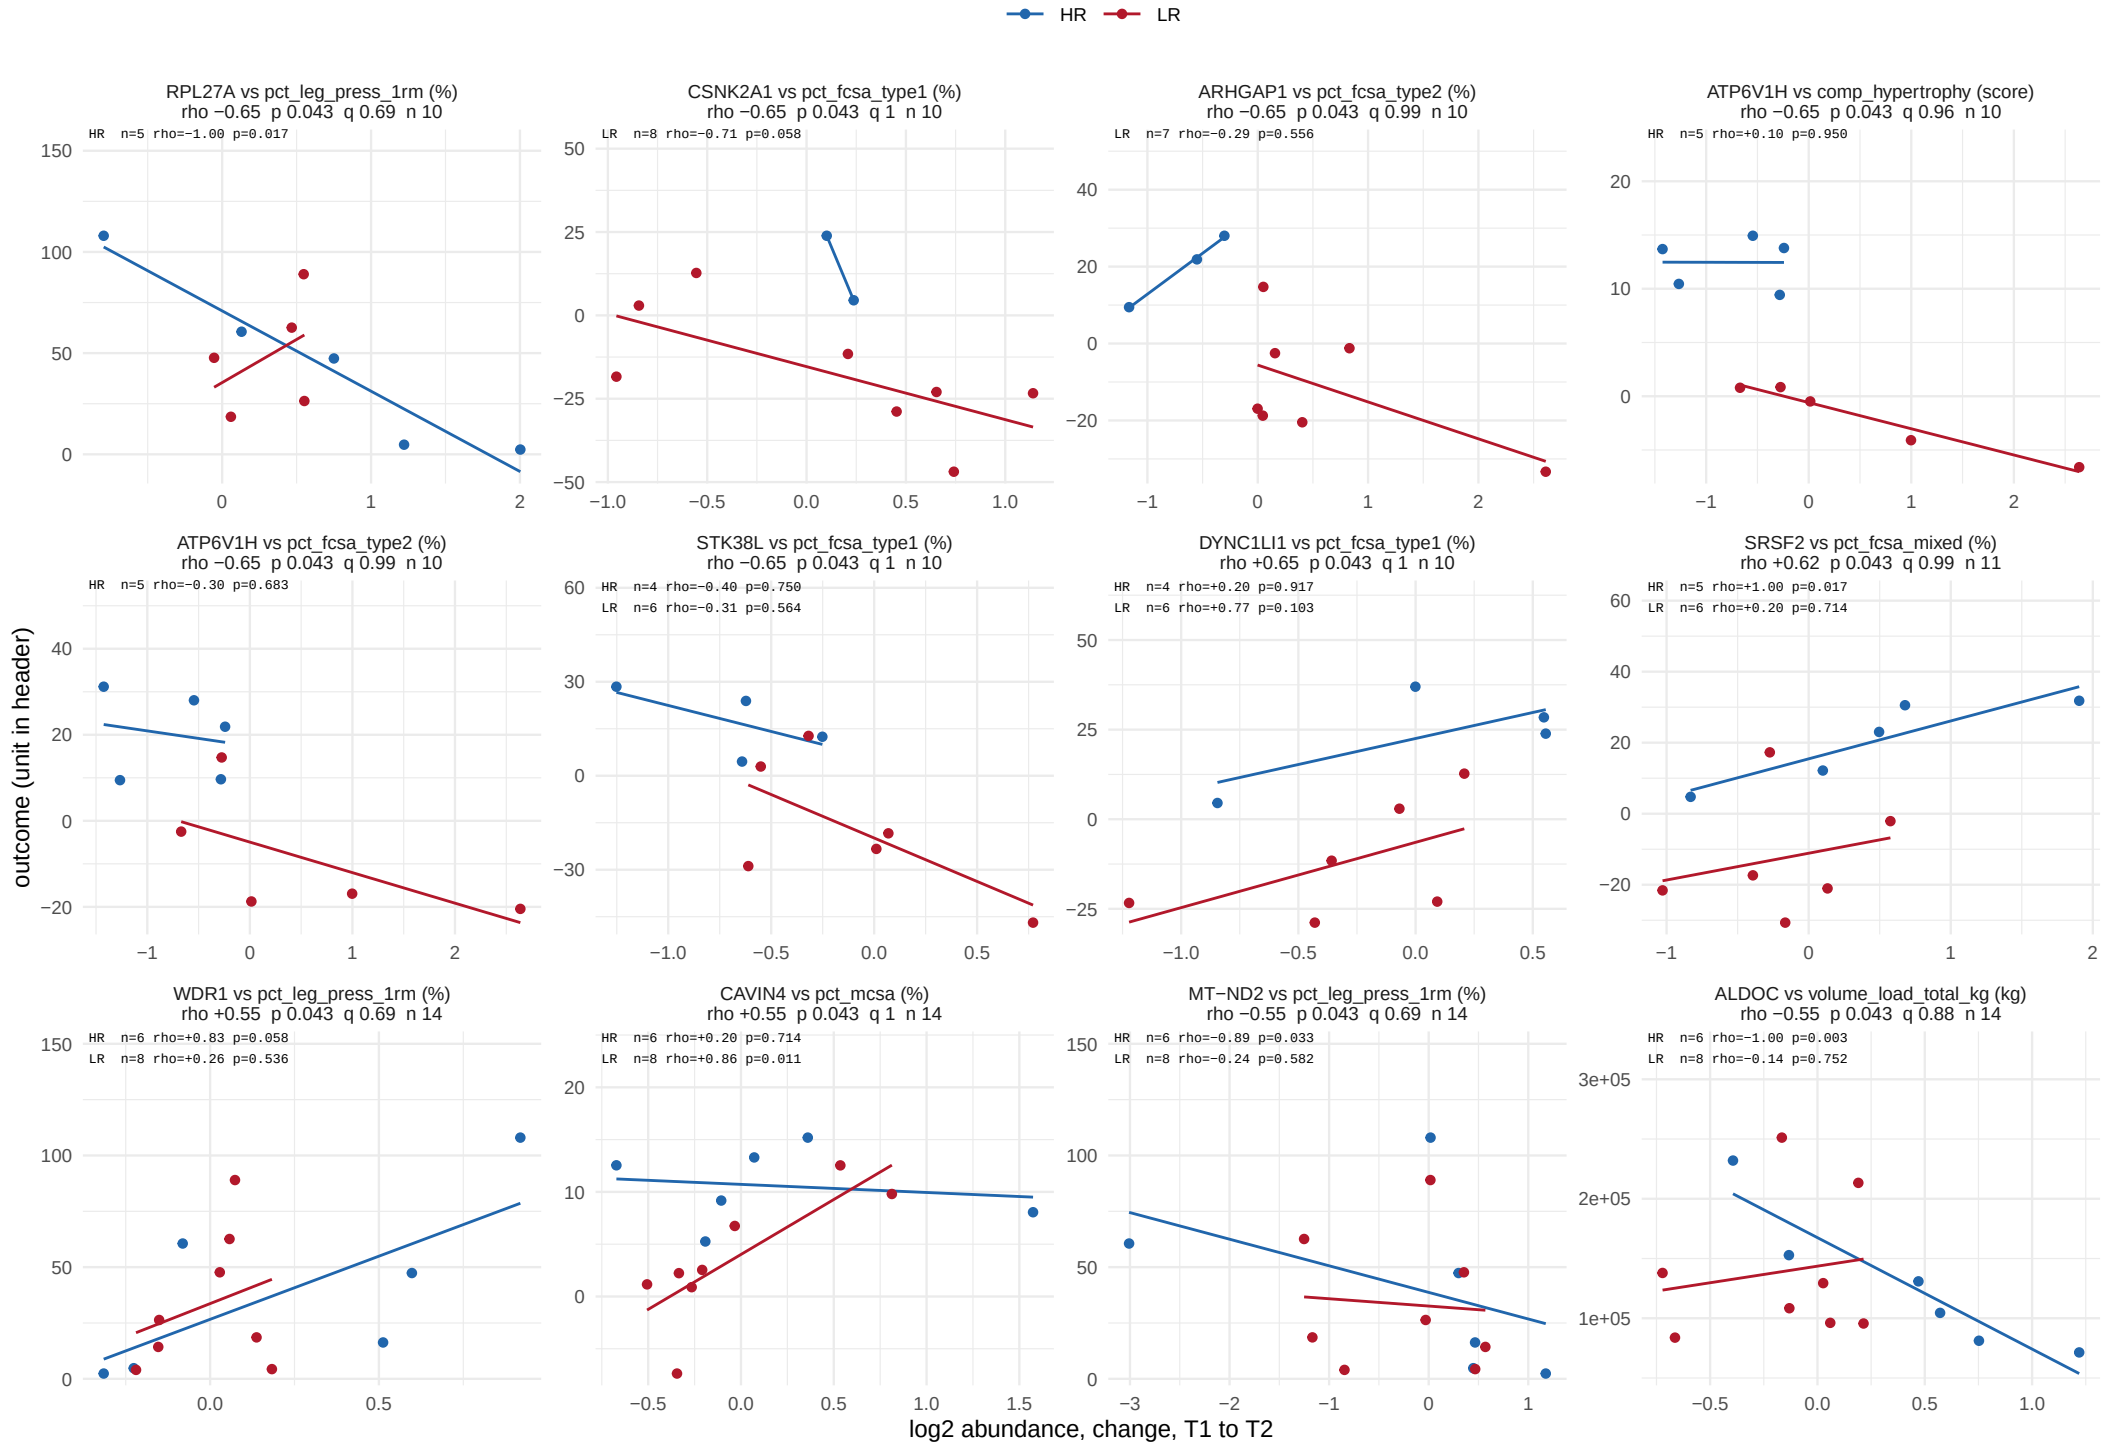

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


467 of 11286 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 33 of 39.

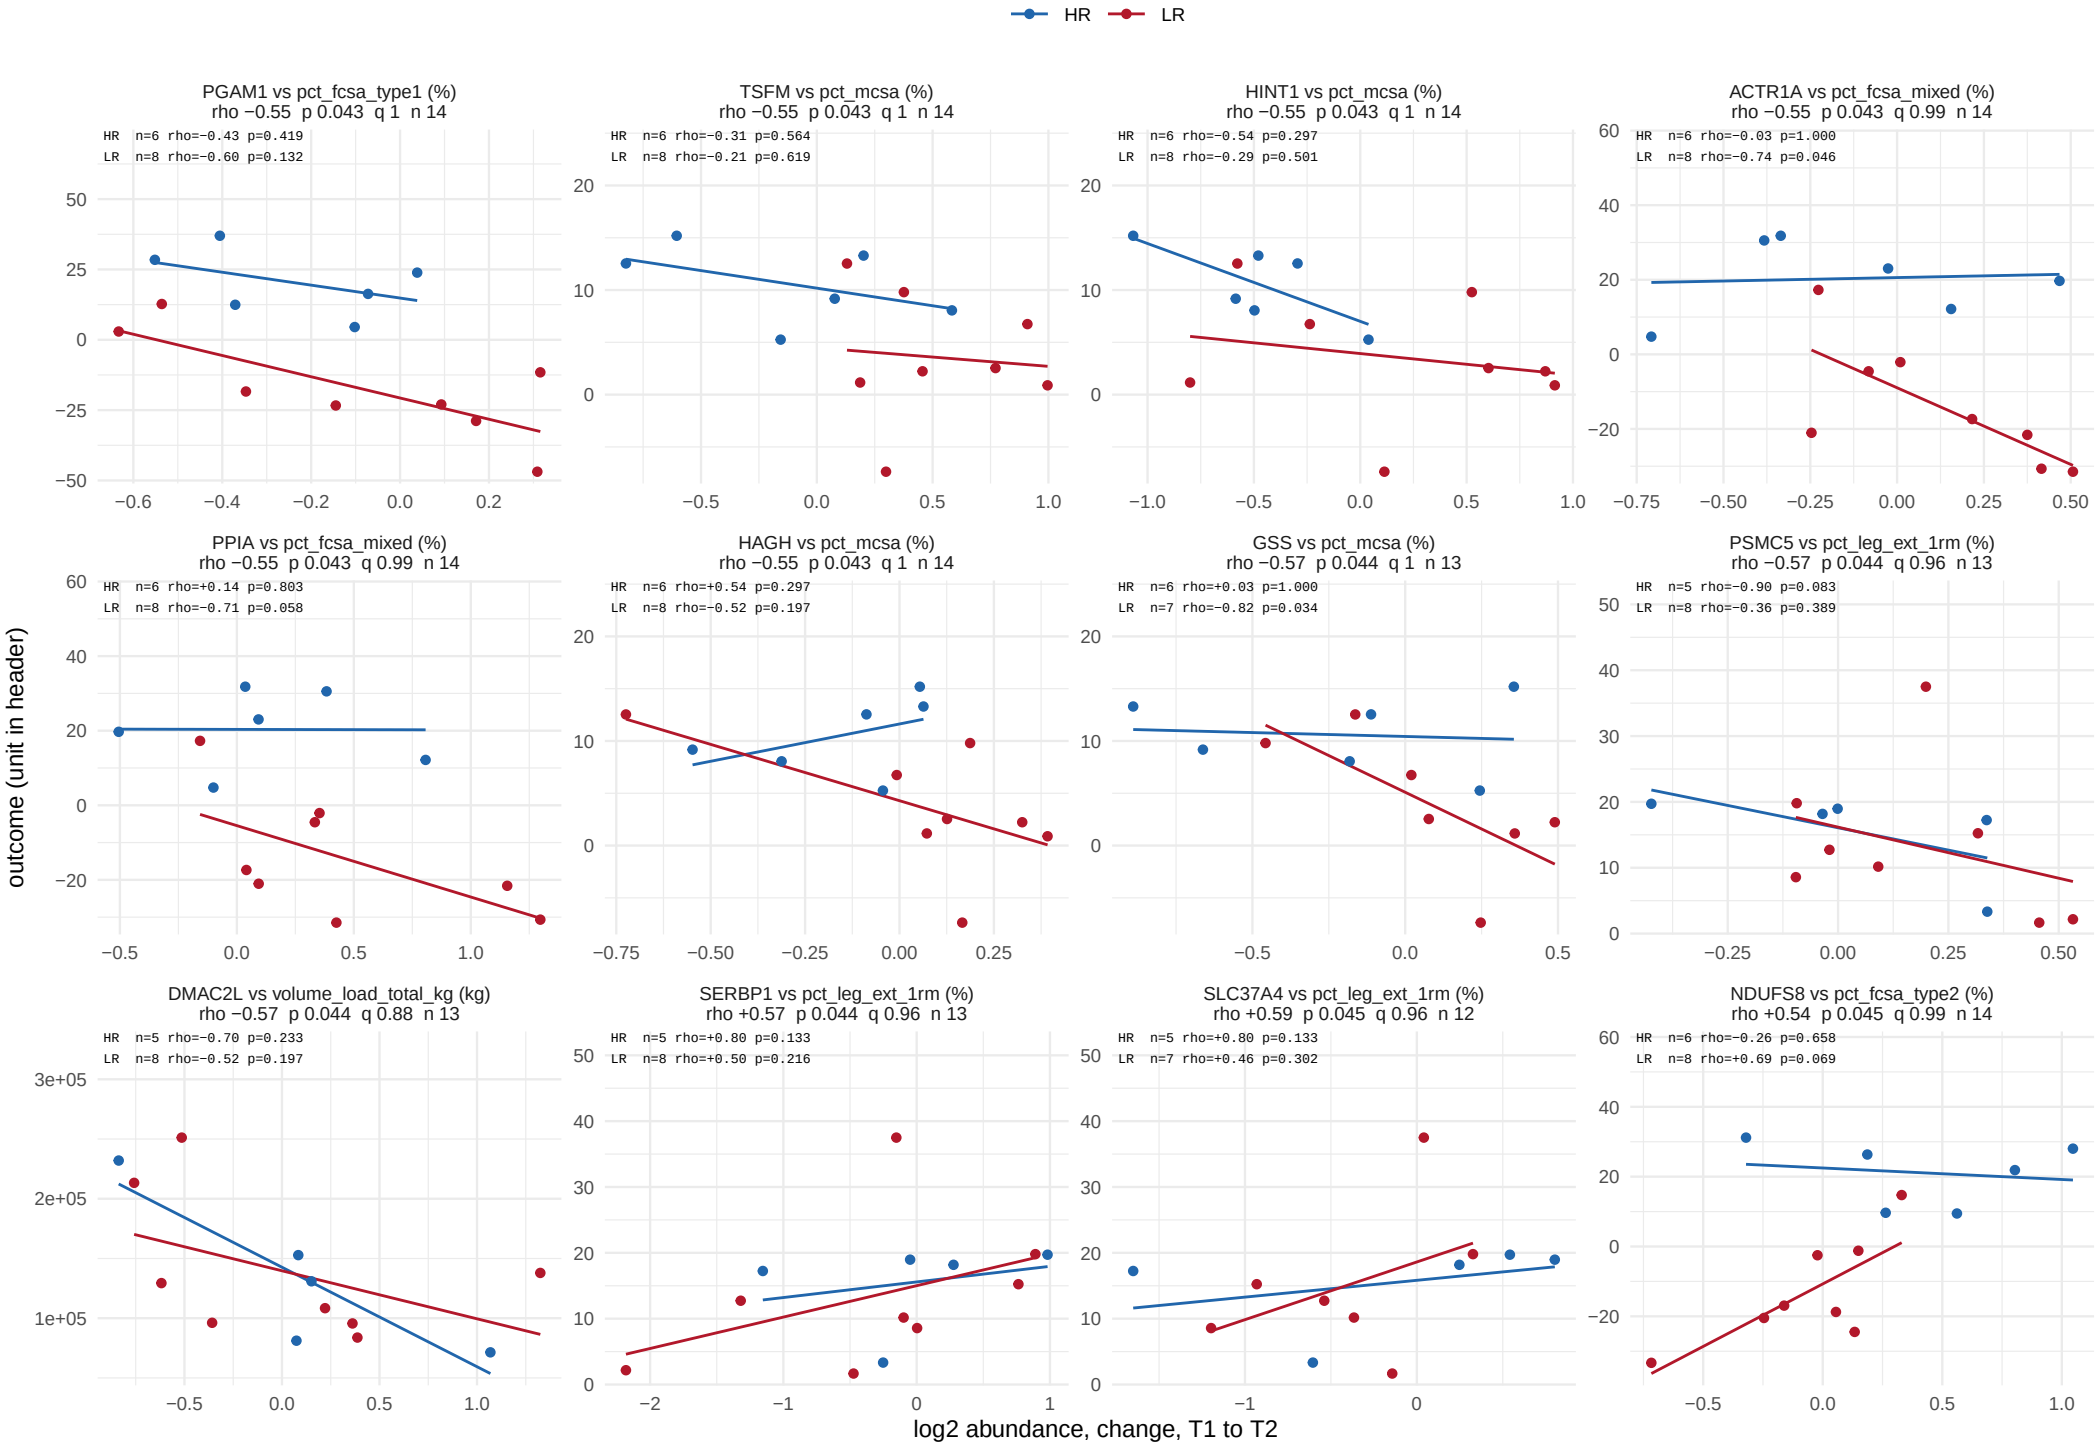

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


467 of 11286 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 34 of 39.

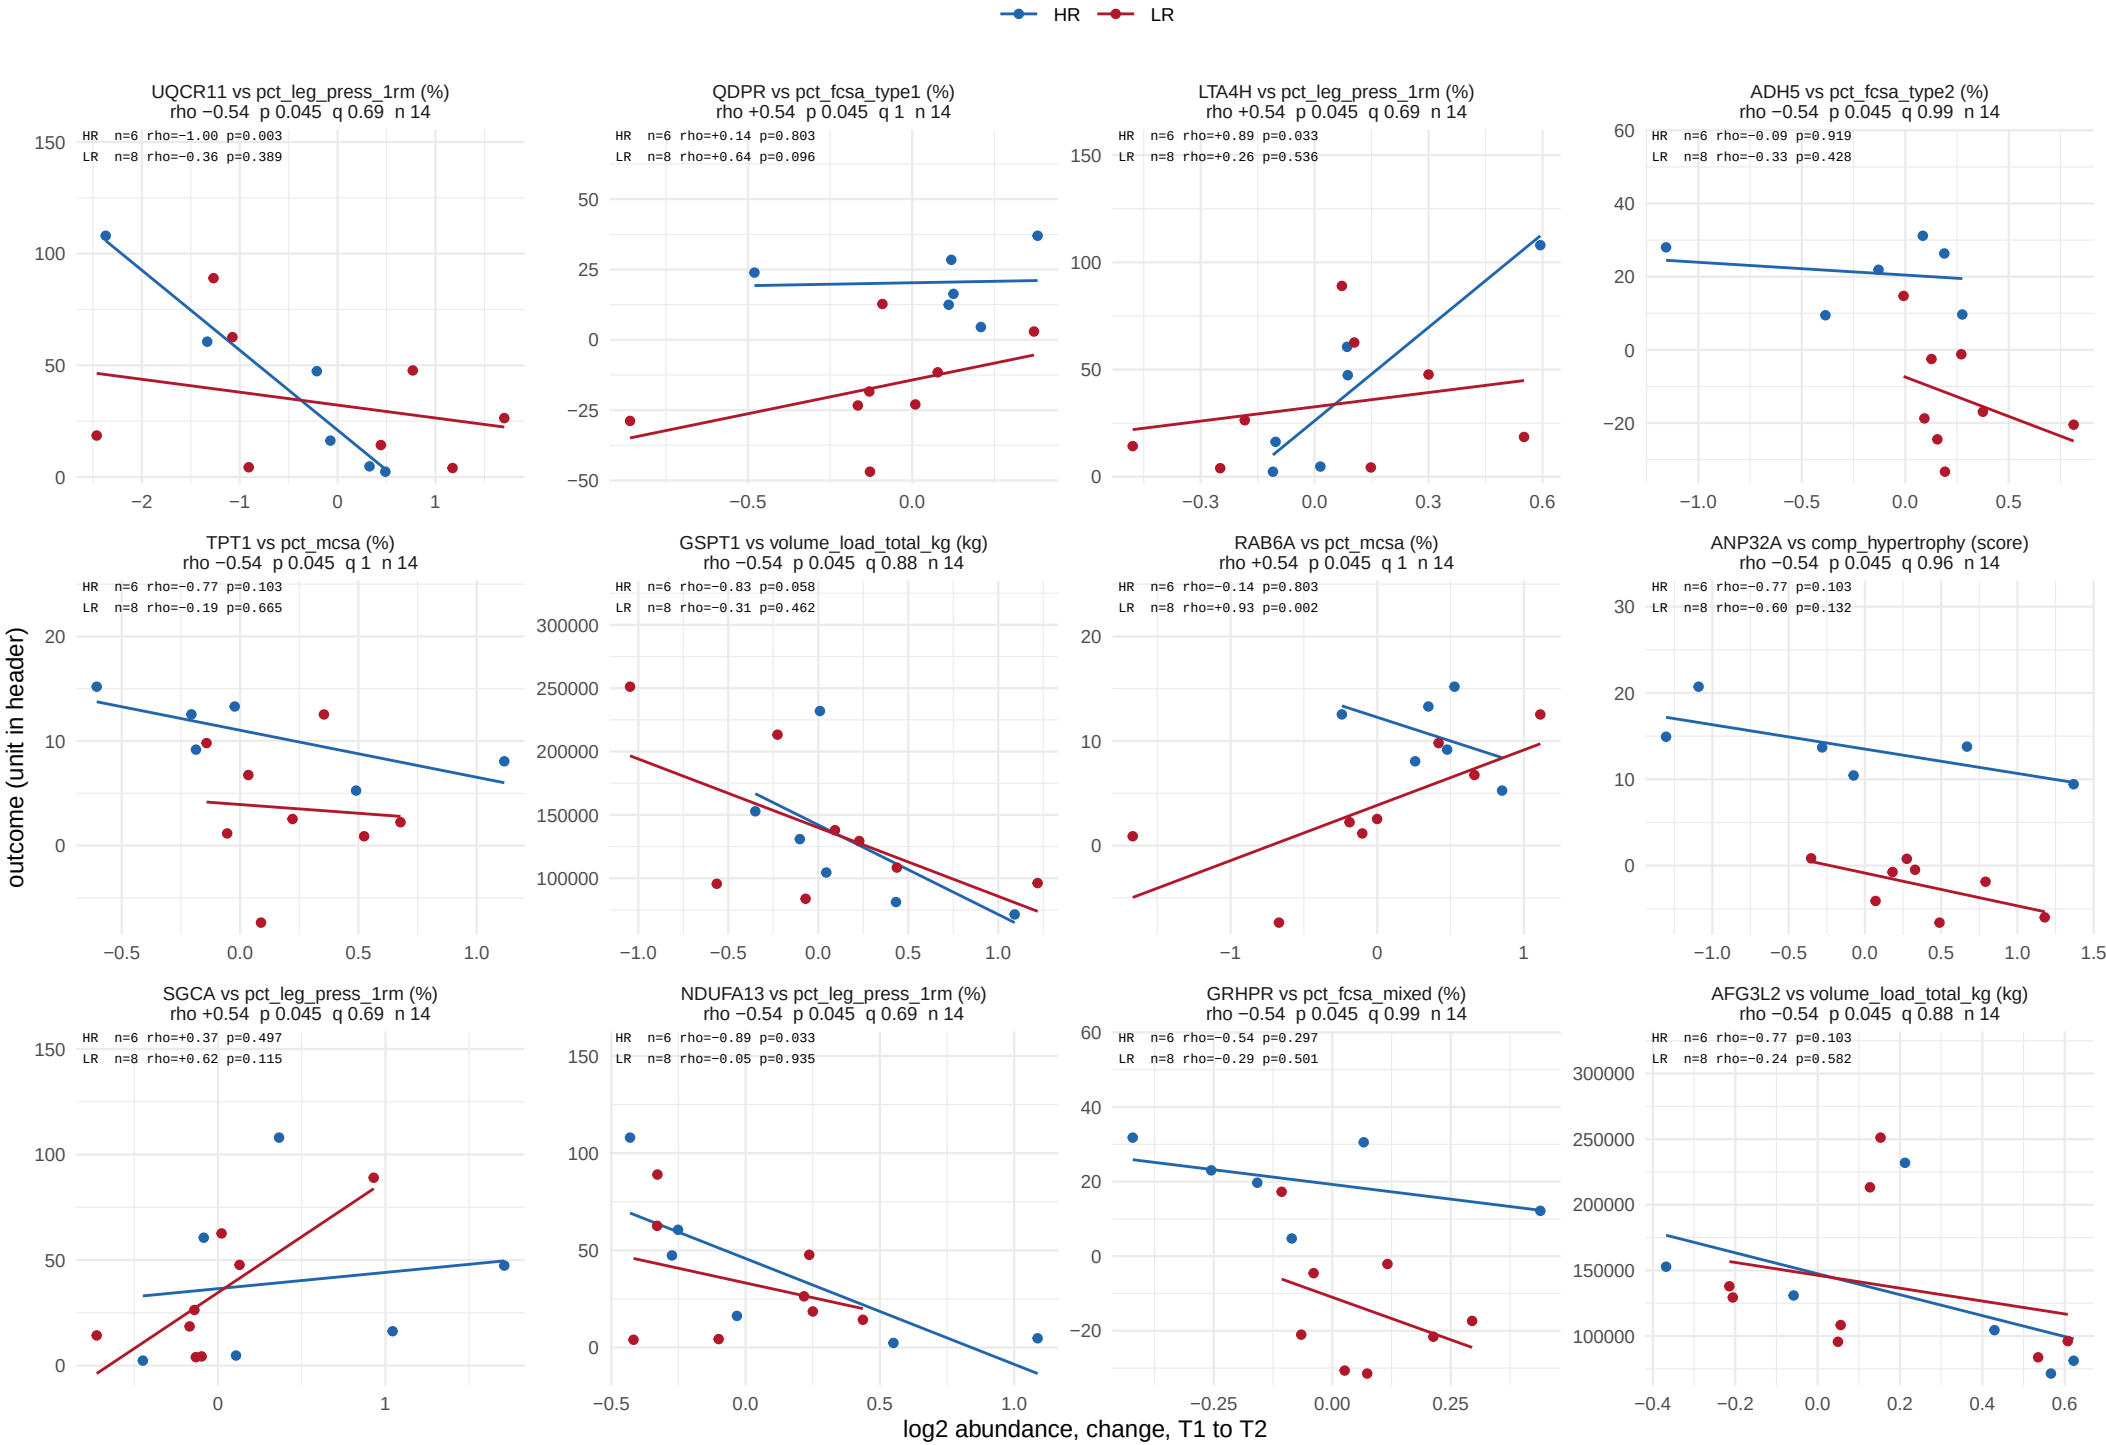

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


467 of 11286 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 35 of 39.

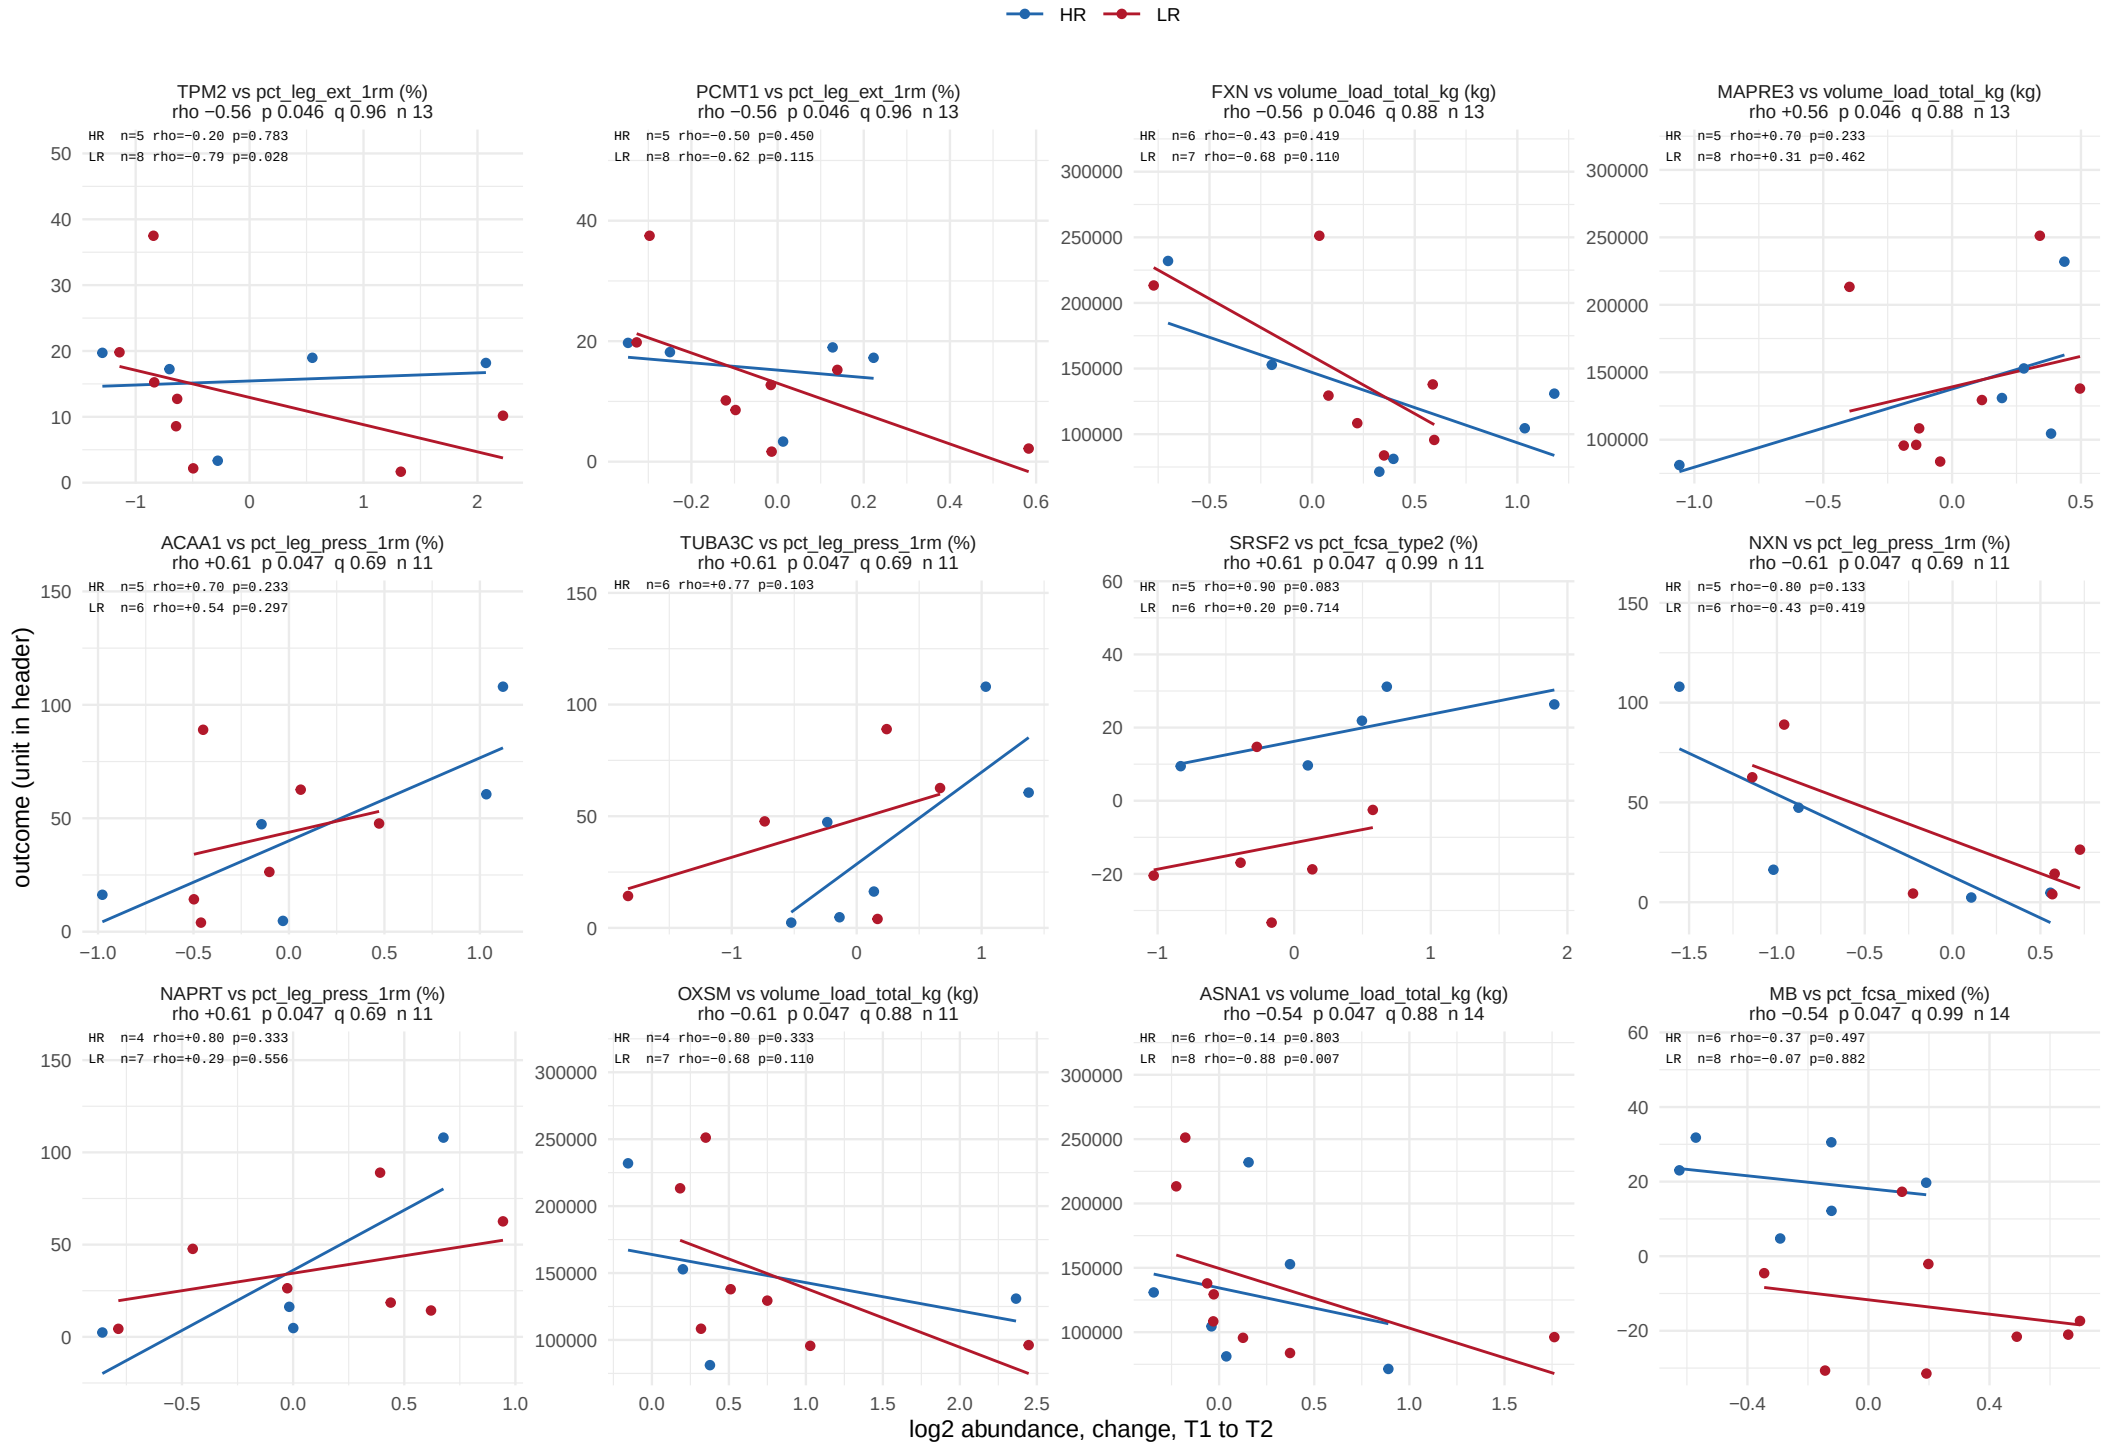

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


467 of 11286 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 36 of 39.

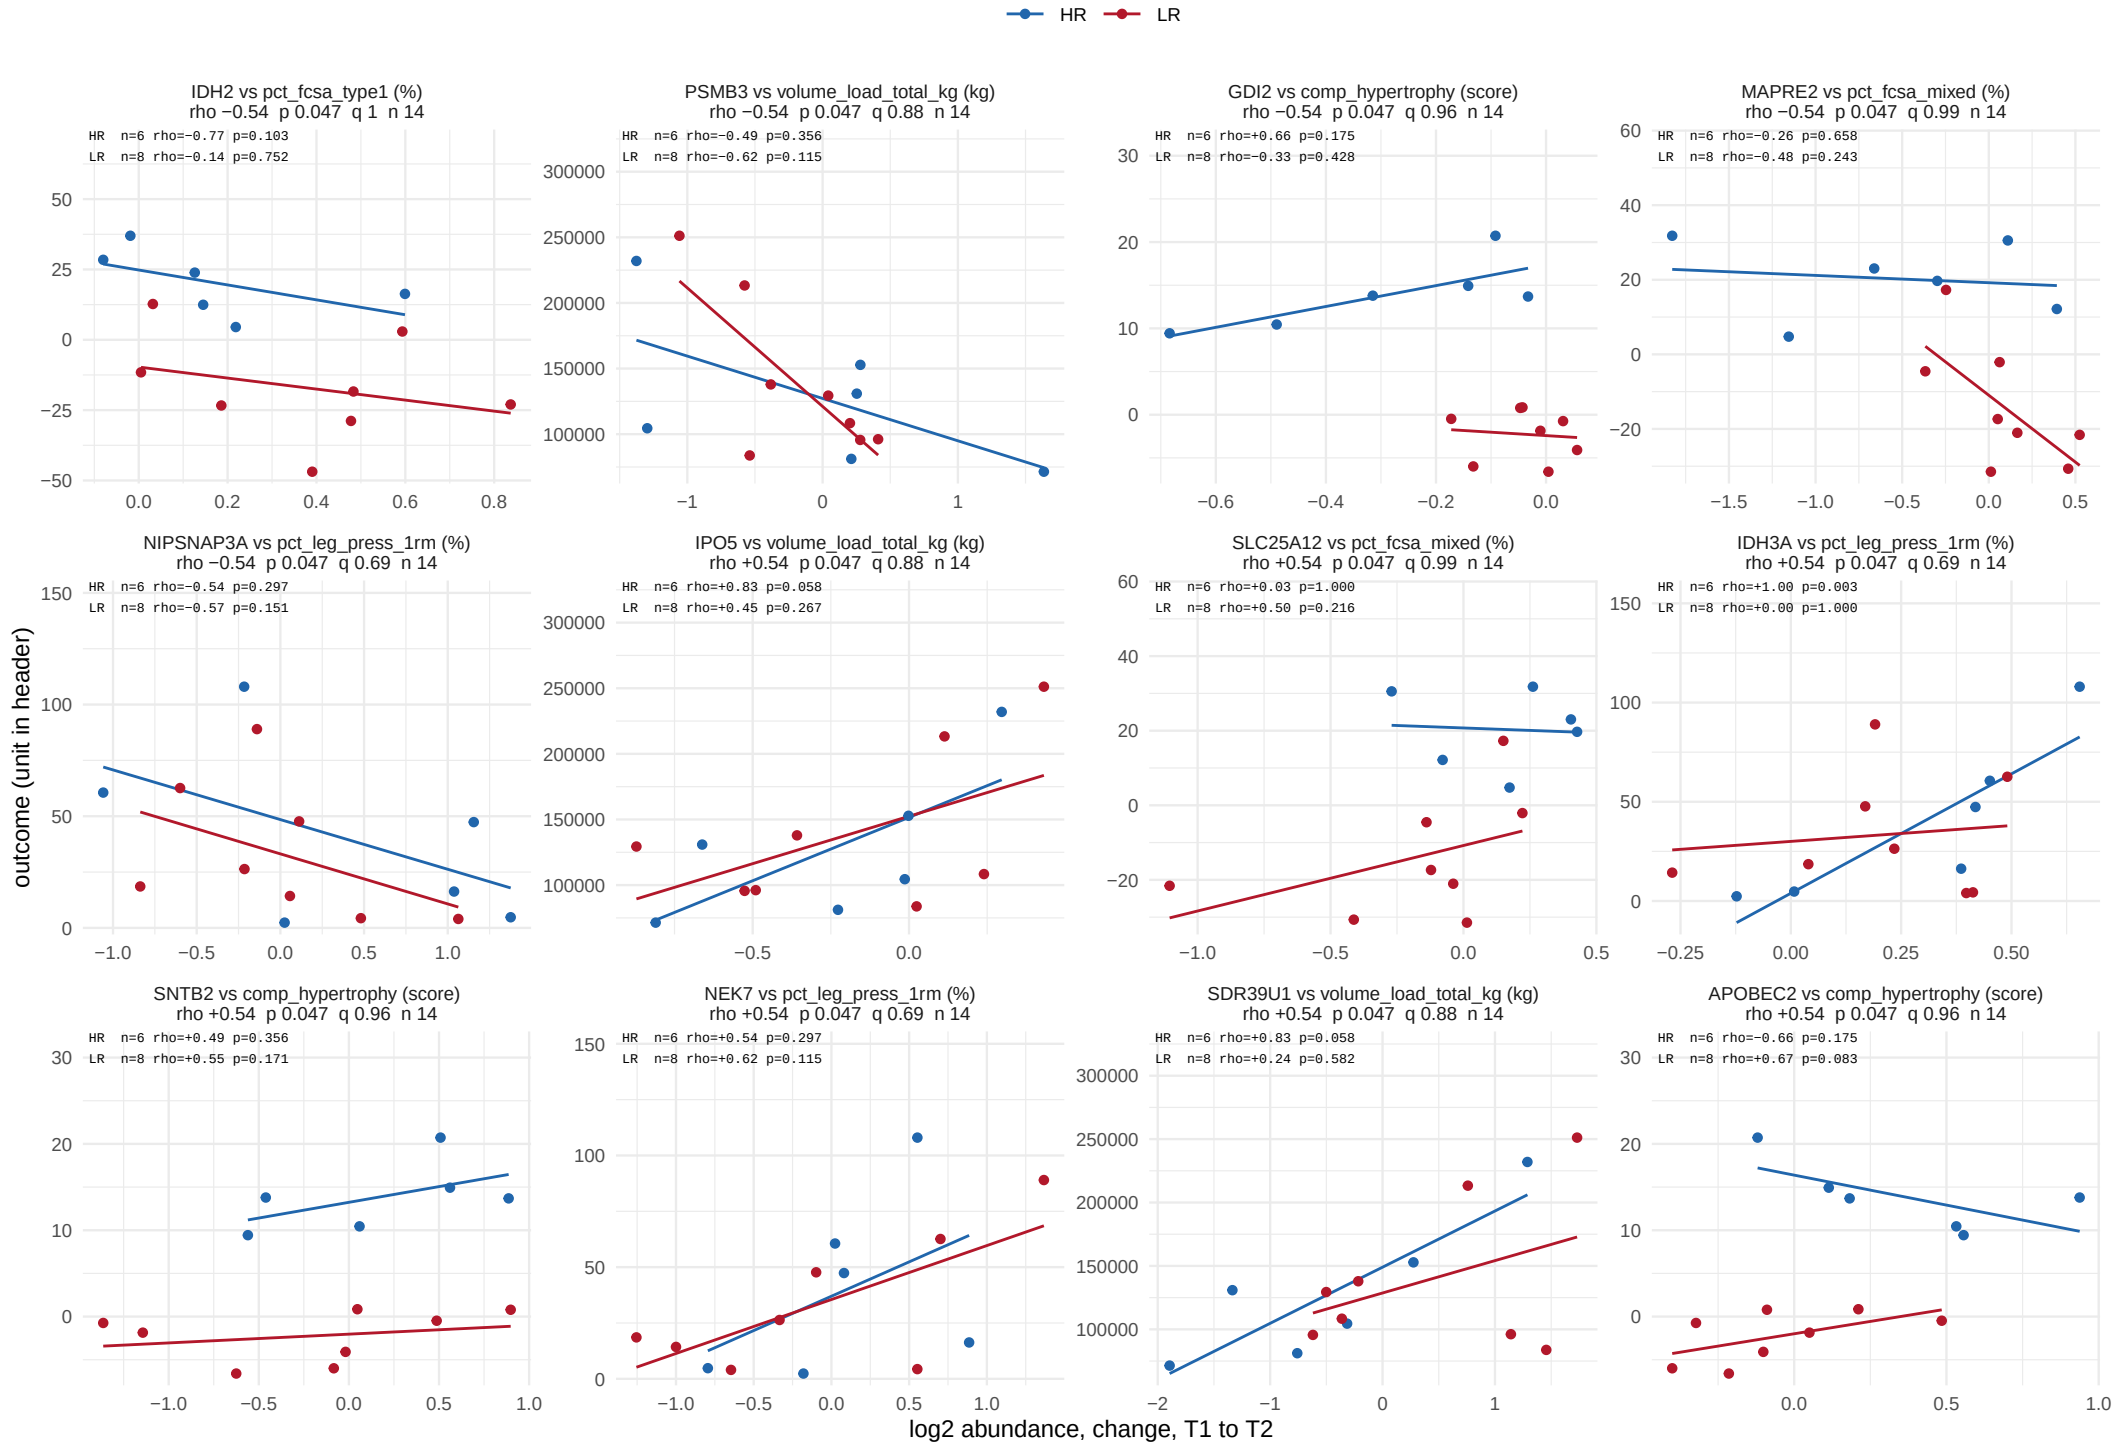

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


467 of 11286 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 37 of 39.

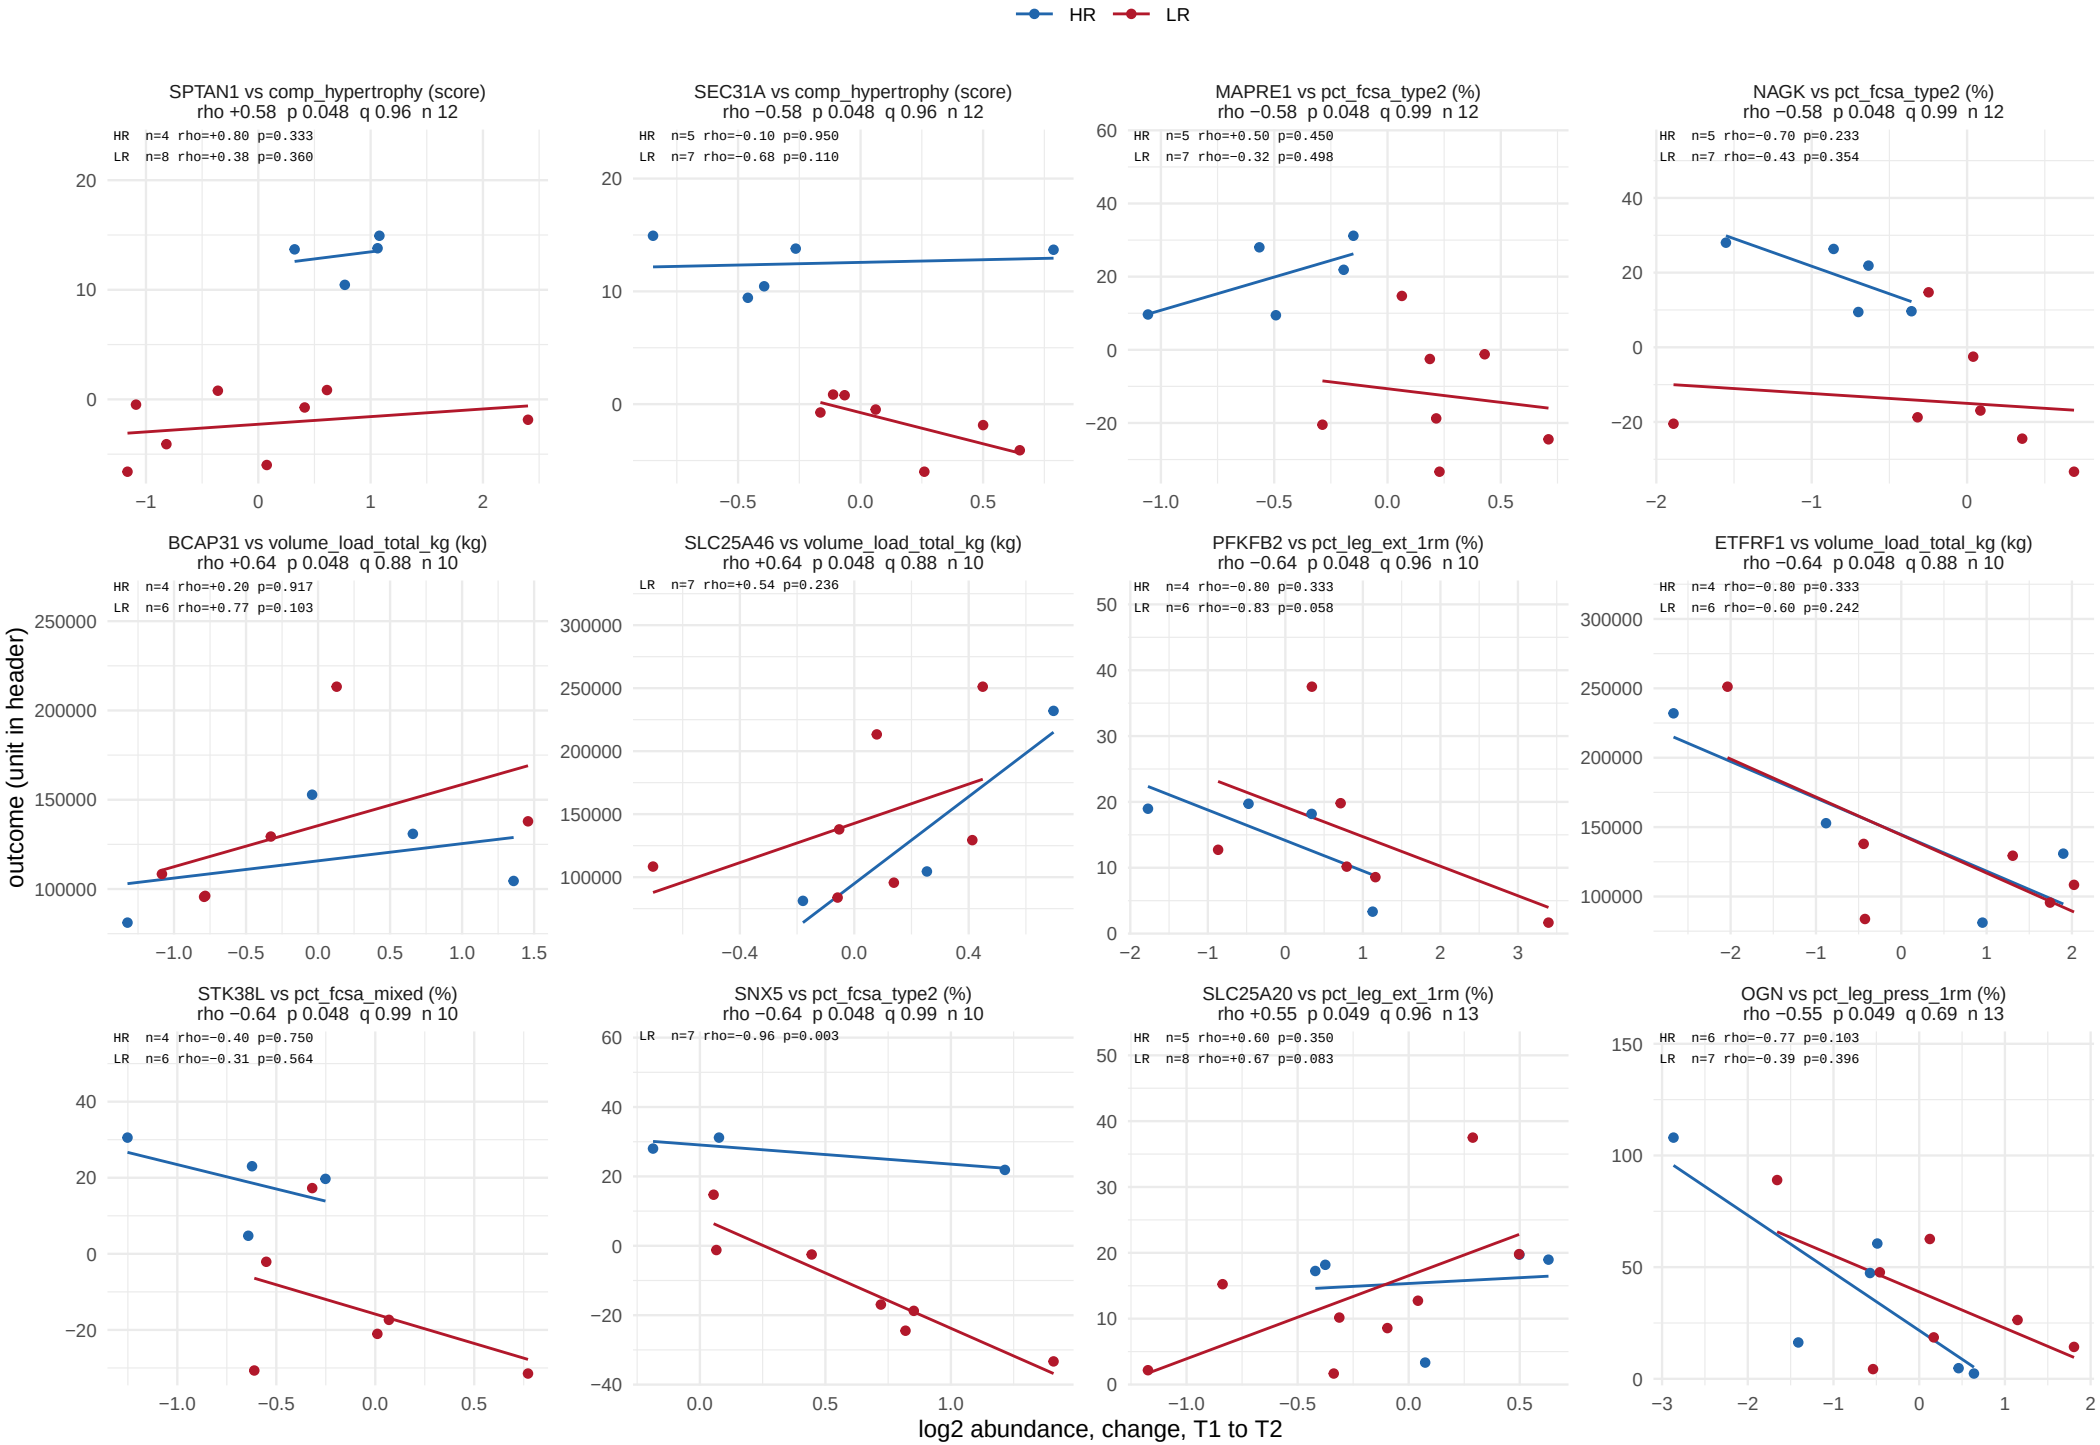

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


467 of 11286 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 38 of 39.

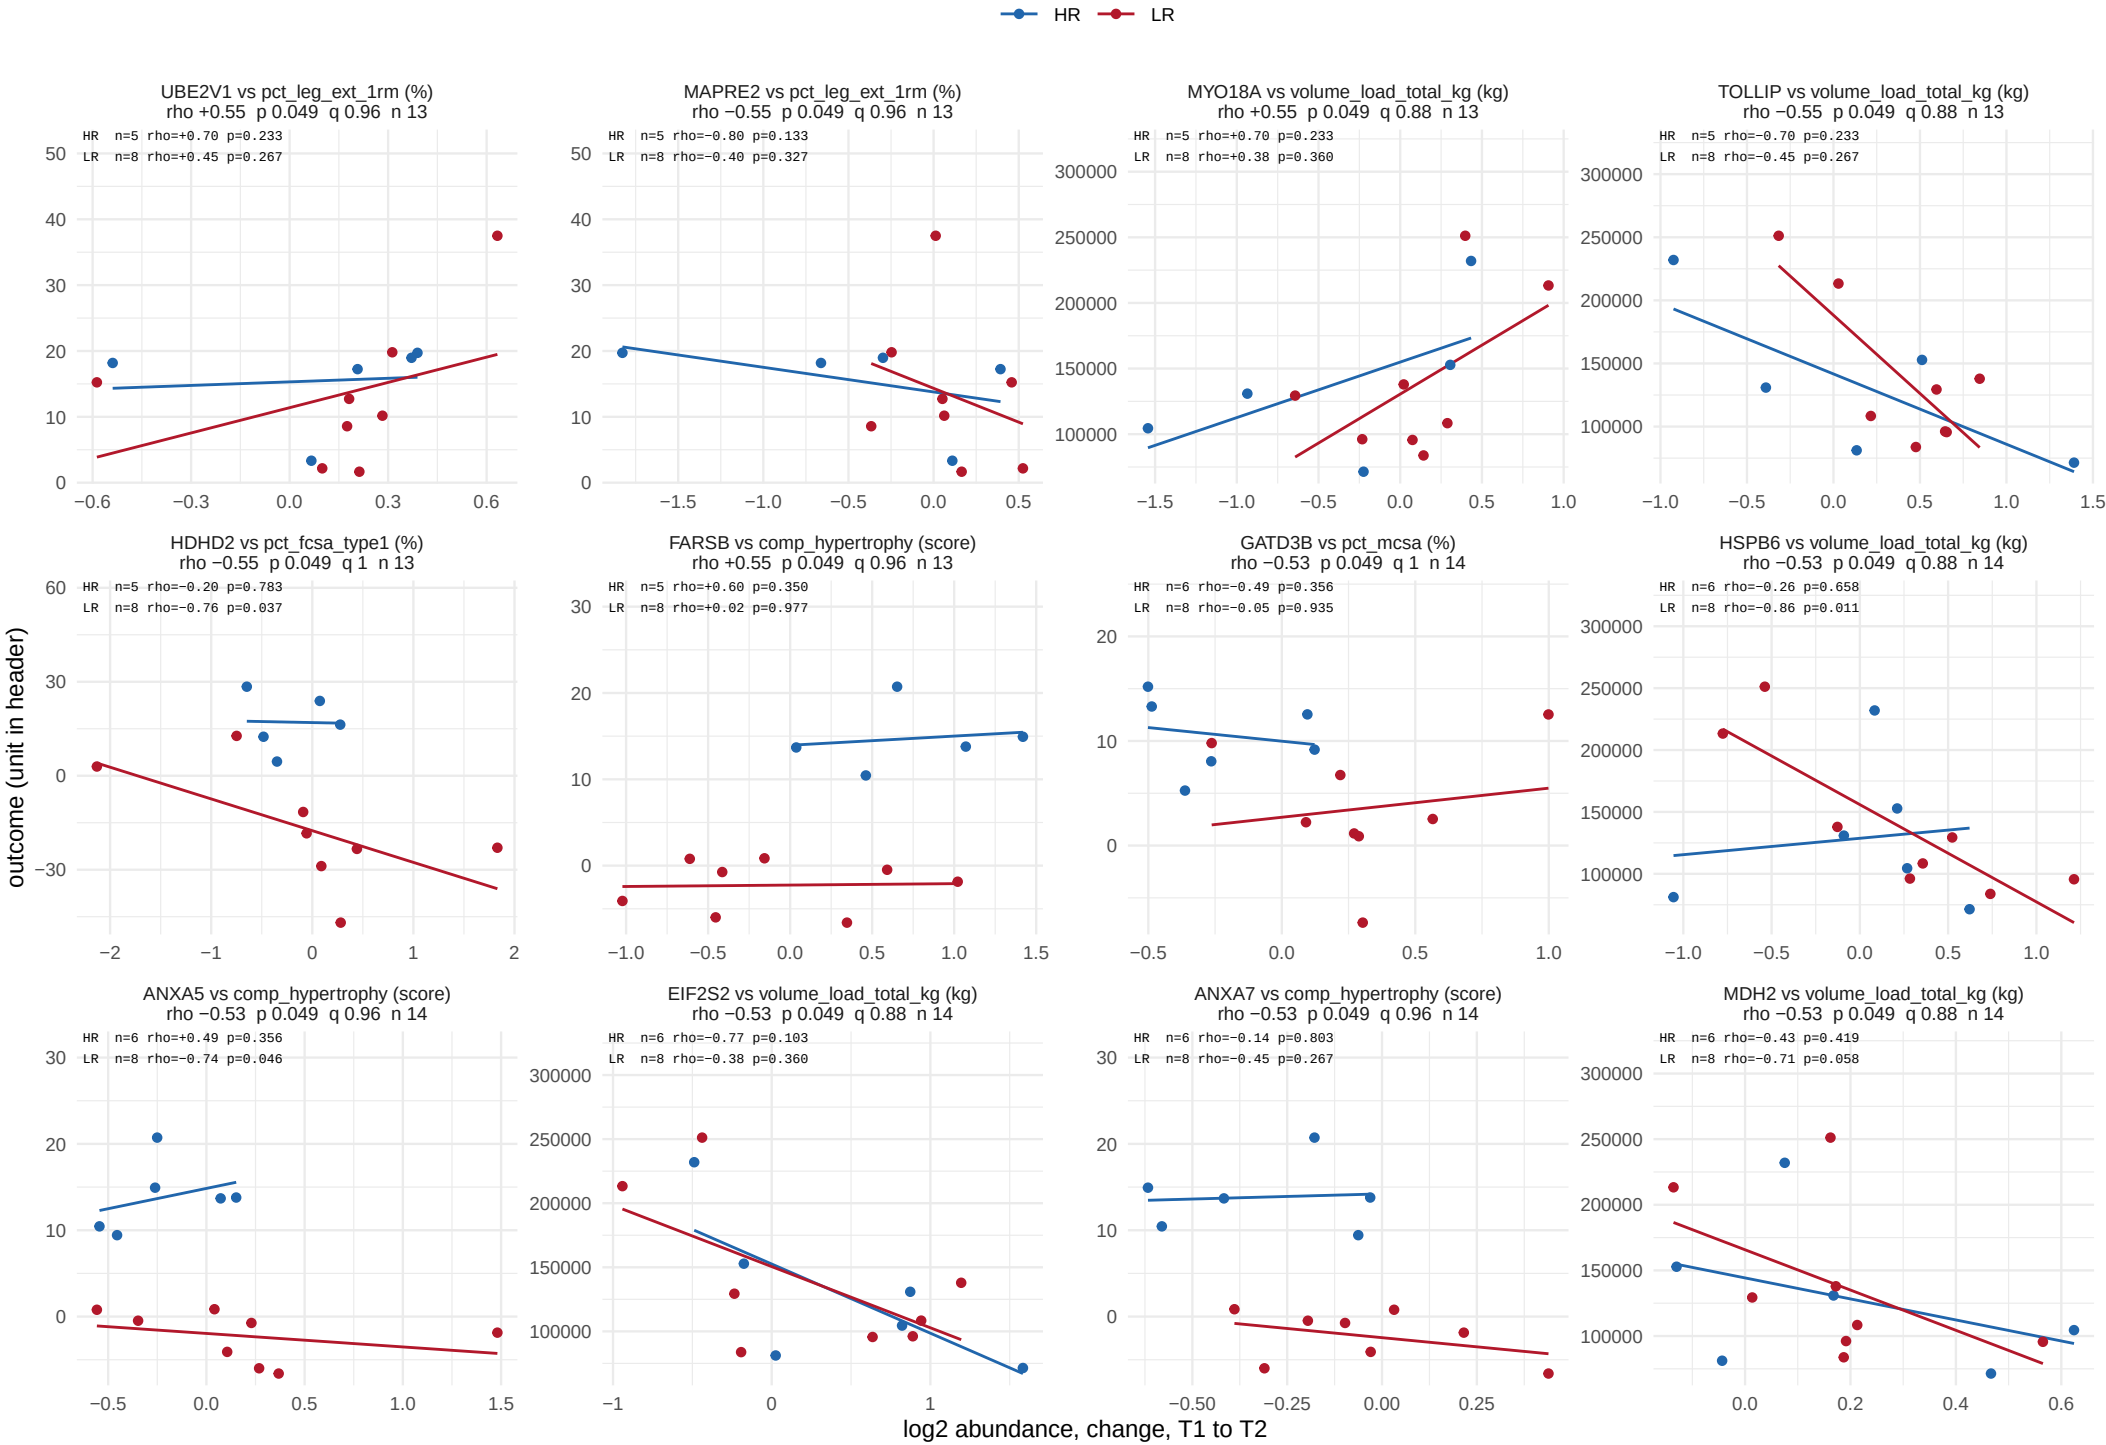

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


467 of 11286 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 39 of 39.

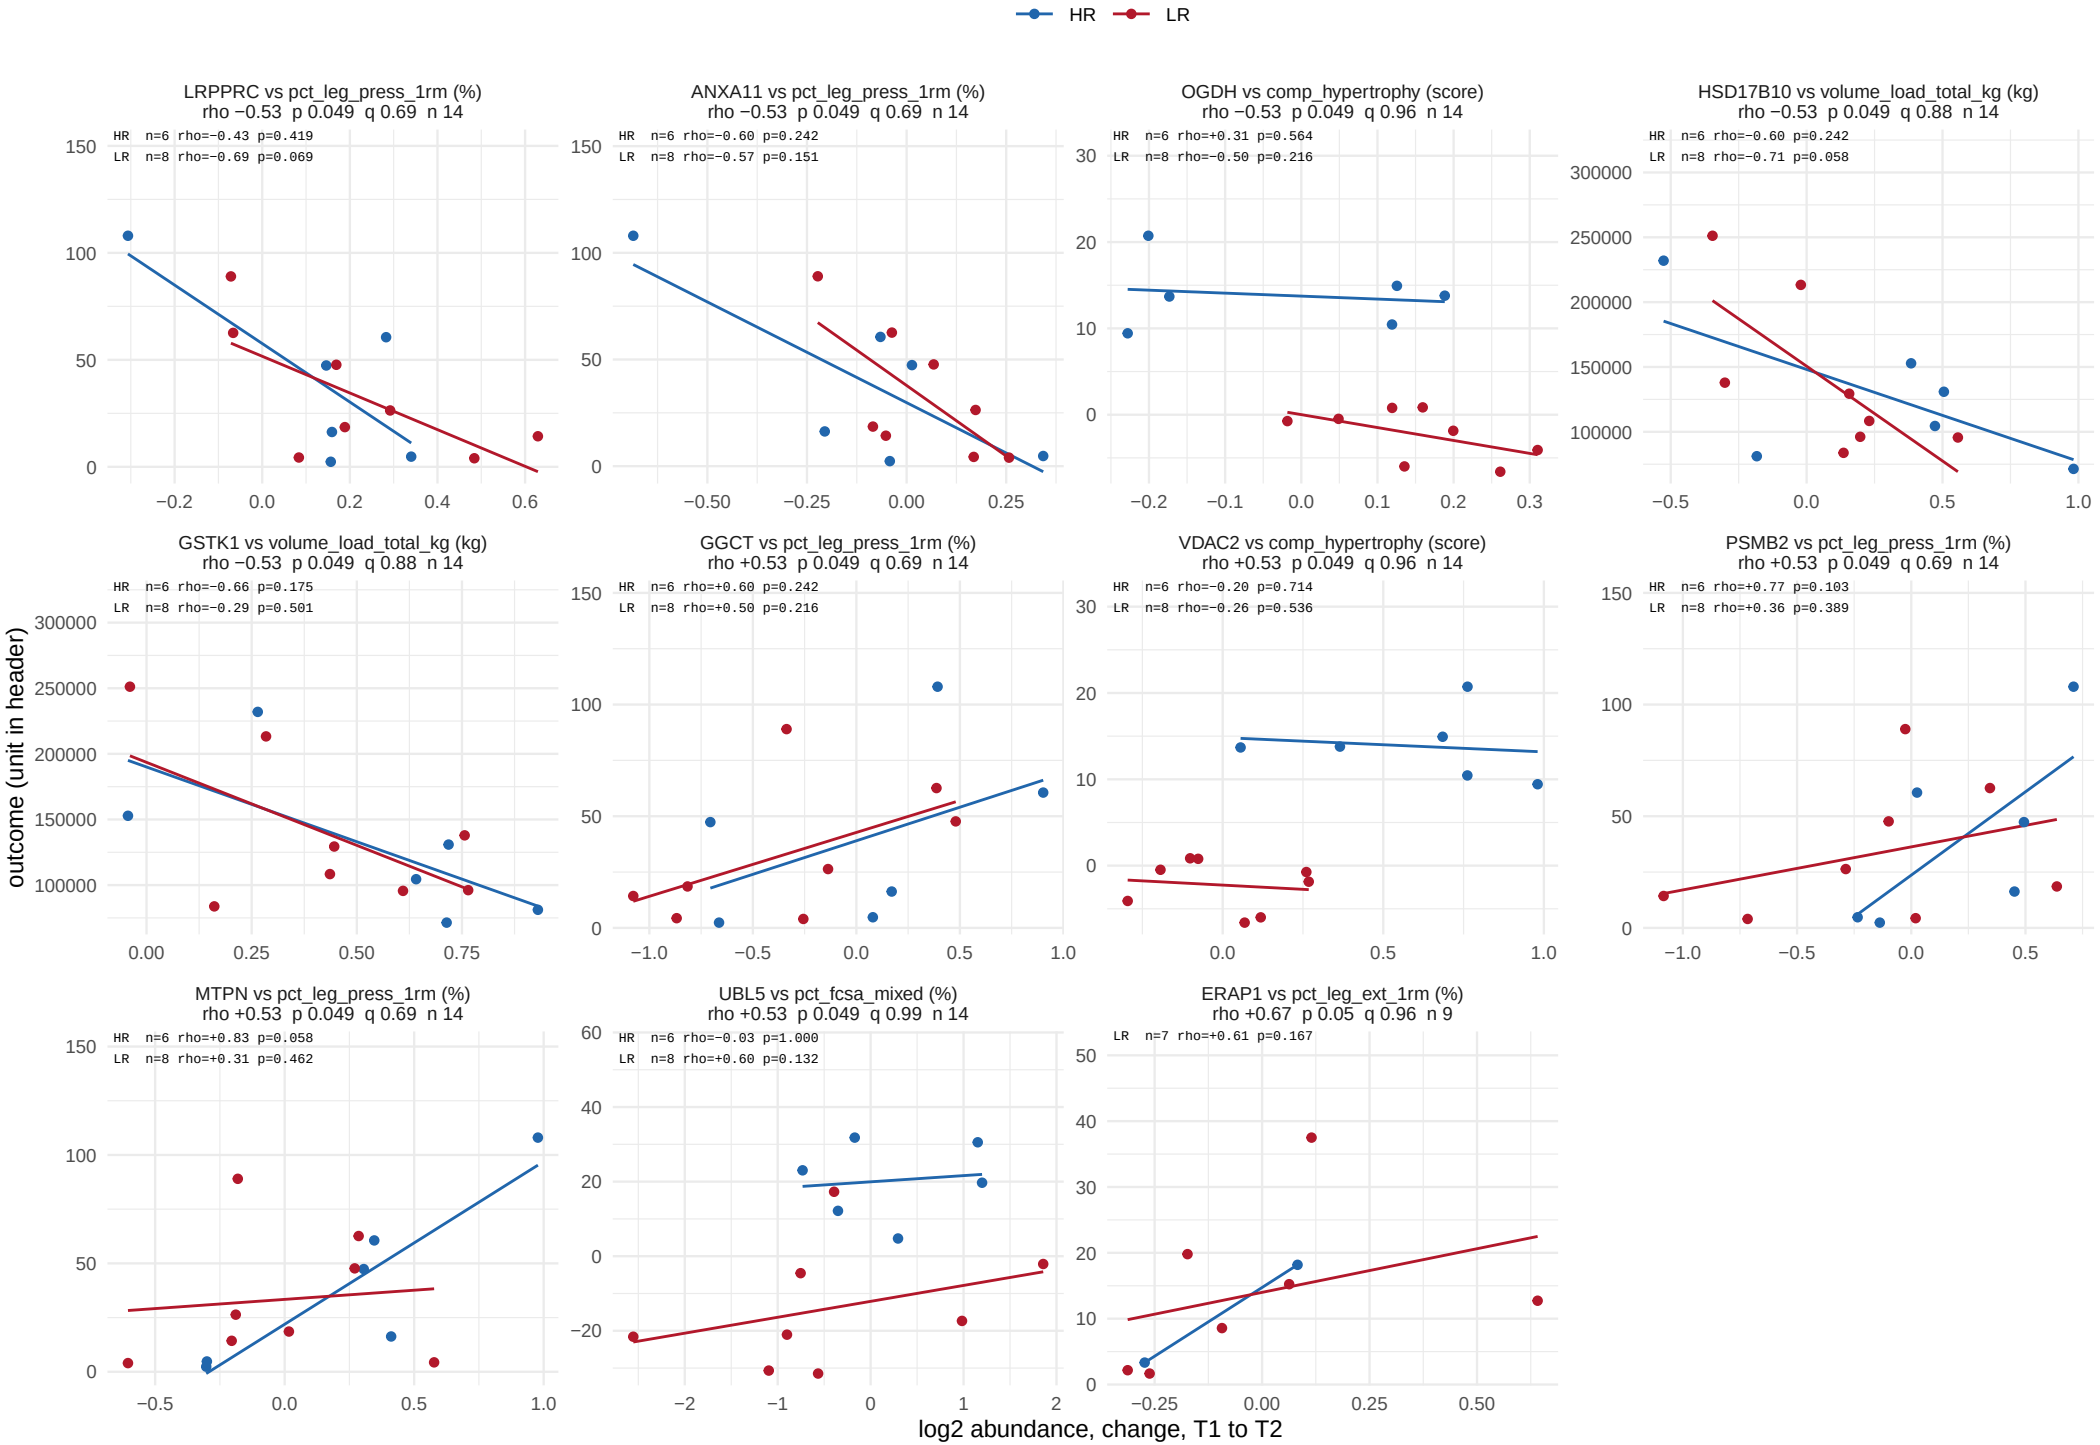

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


654 of 12553 feature−outcome pairs at p < 0.05, 8 at BH < 0.05. Page 1 of 55.

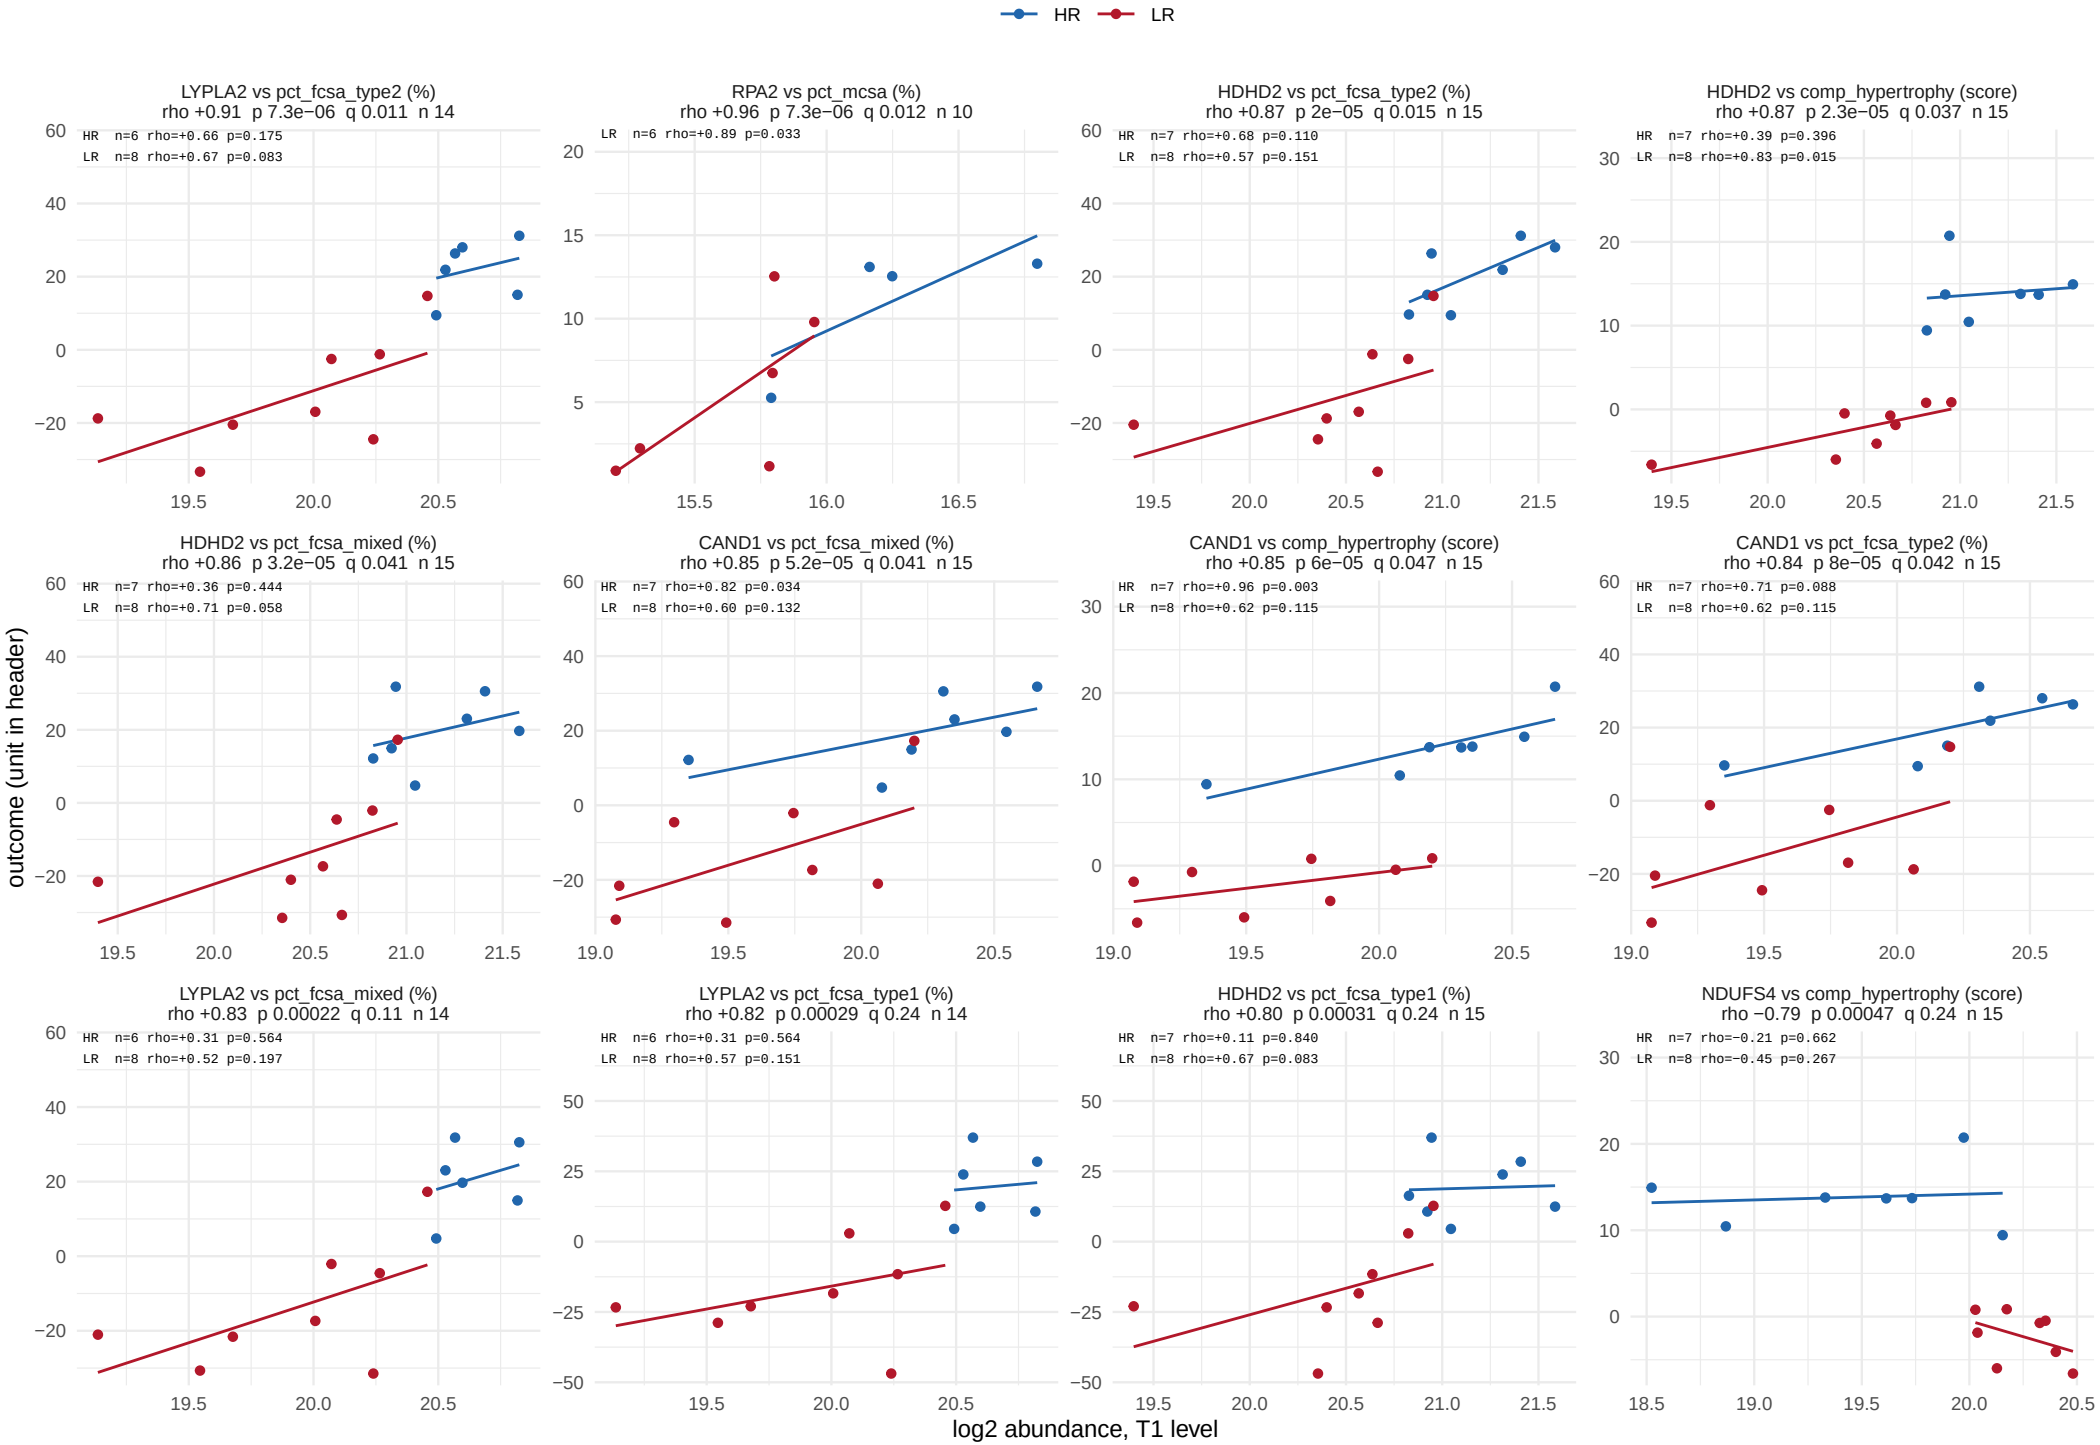

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


654 of 12553 feature−outcome pairs at p < 0.05, 8 at BH < 0.05. Page 2 of 55.

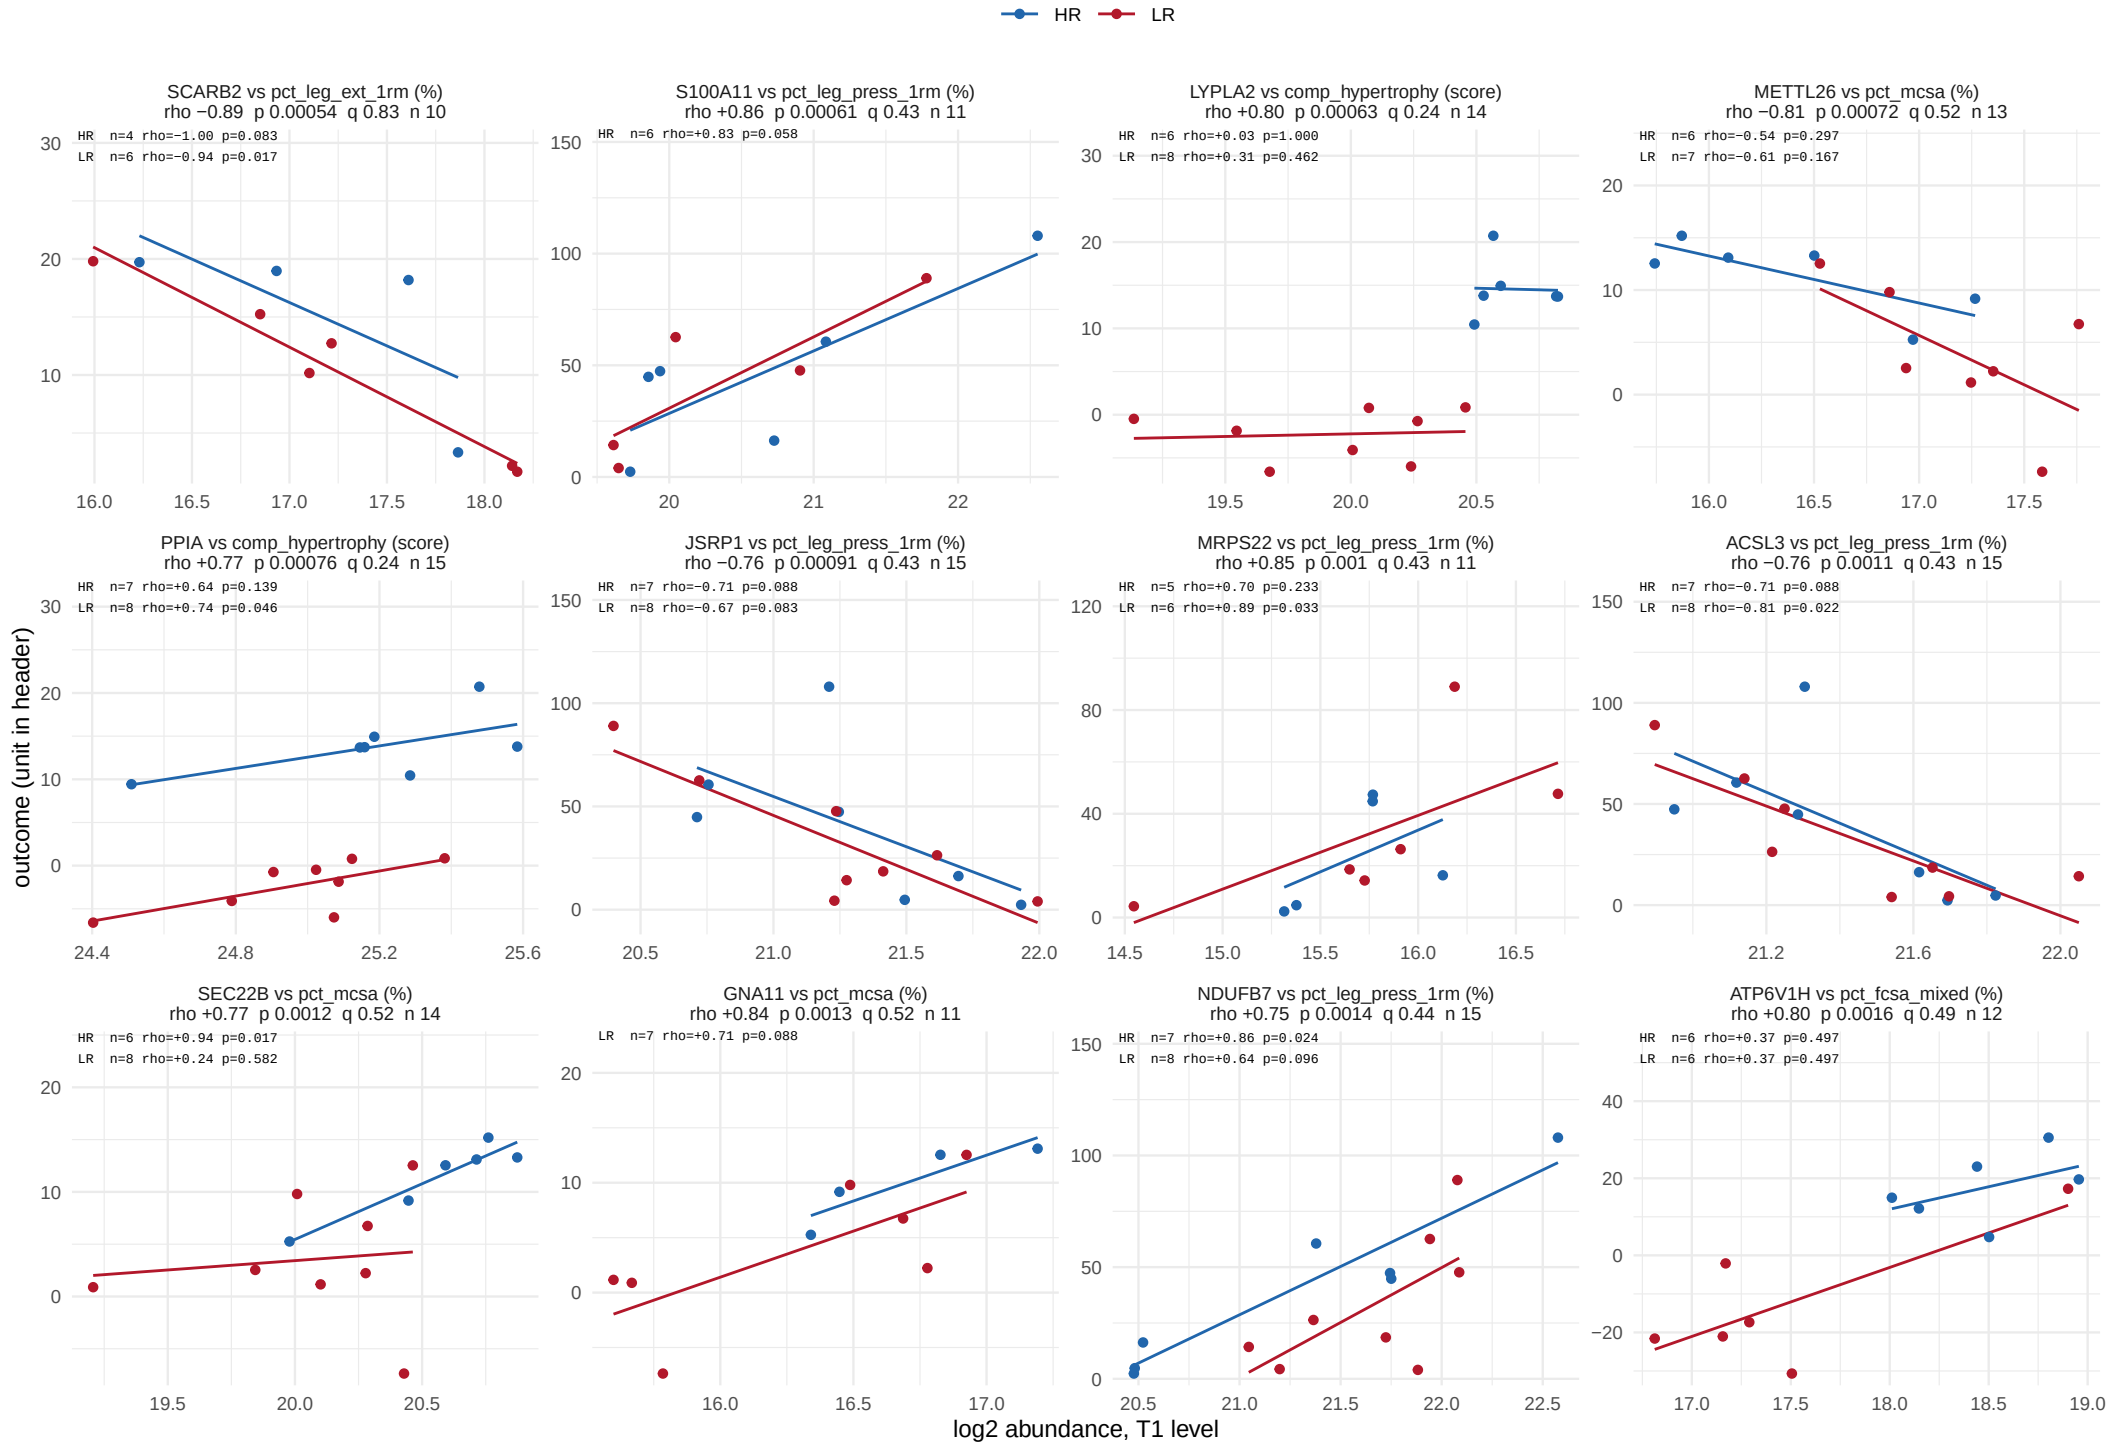

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


654 of 12553 feature−outcome pairs at p < 0.05, 8 at BH < 0.05. Page 3 of 55.

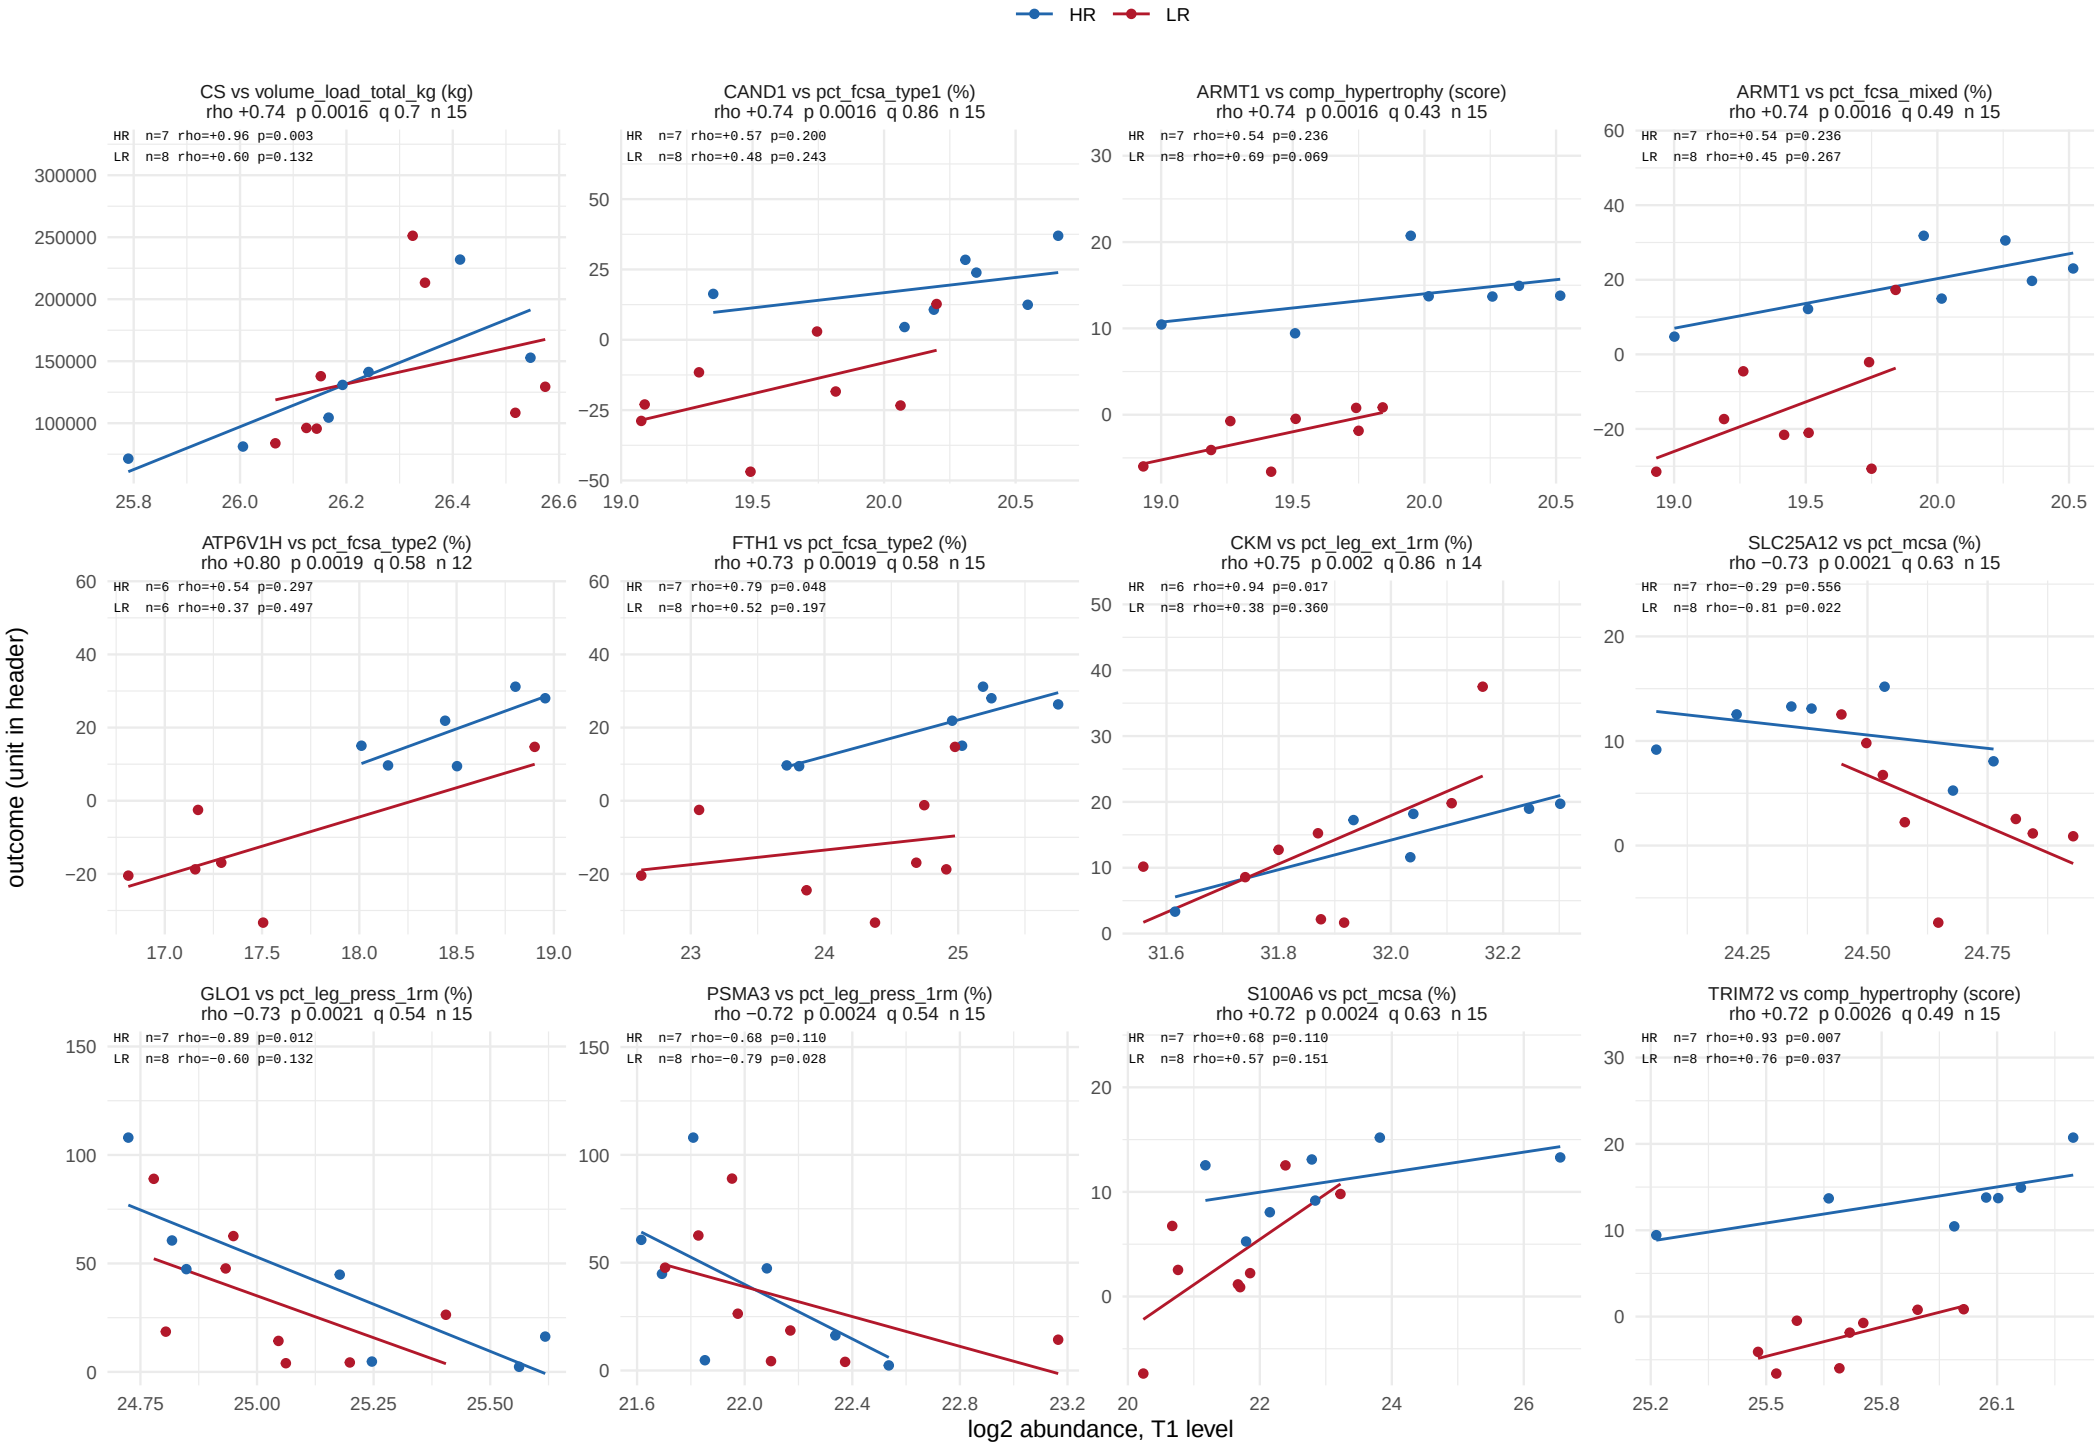

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


654 of 12553 feature−outcome pairs at p < 0.05, 8 at BH < 0.05. Page 4 of 55.

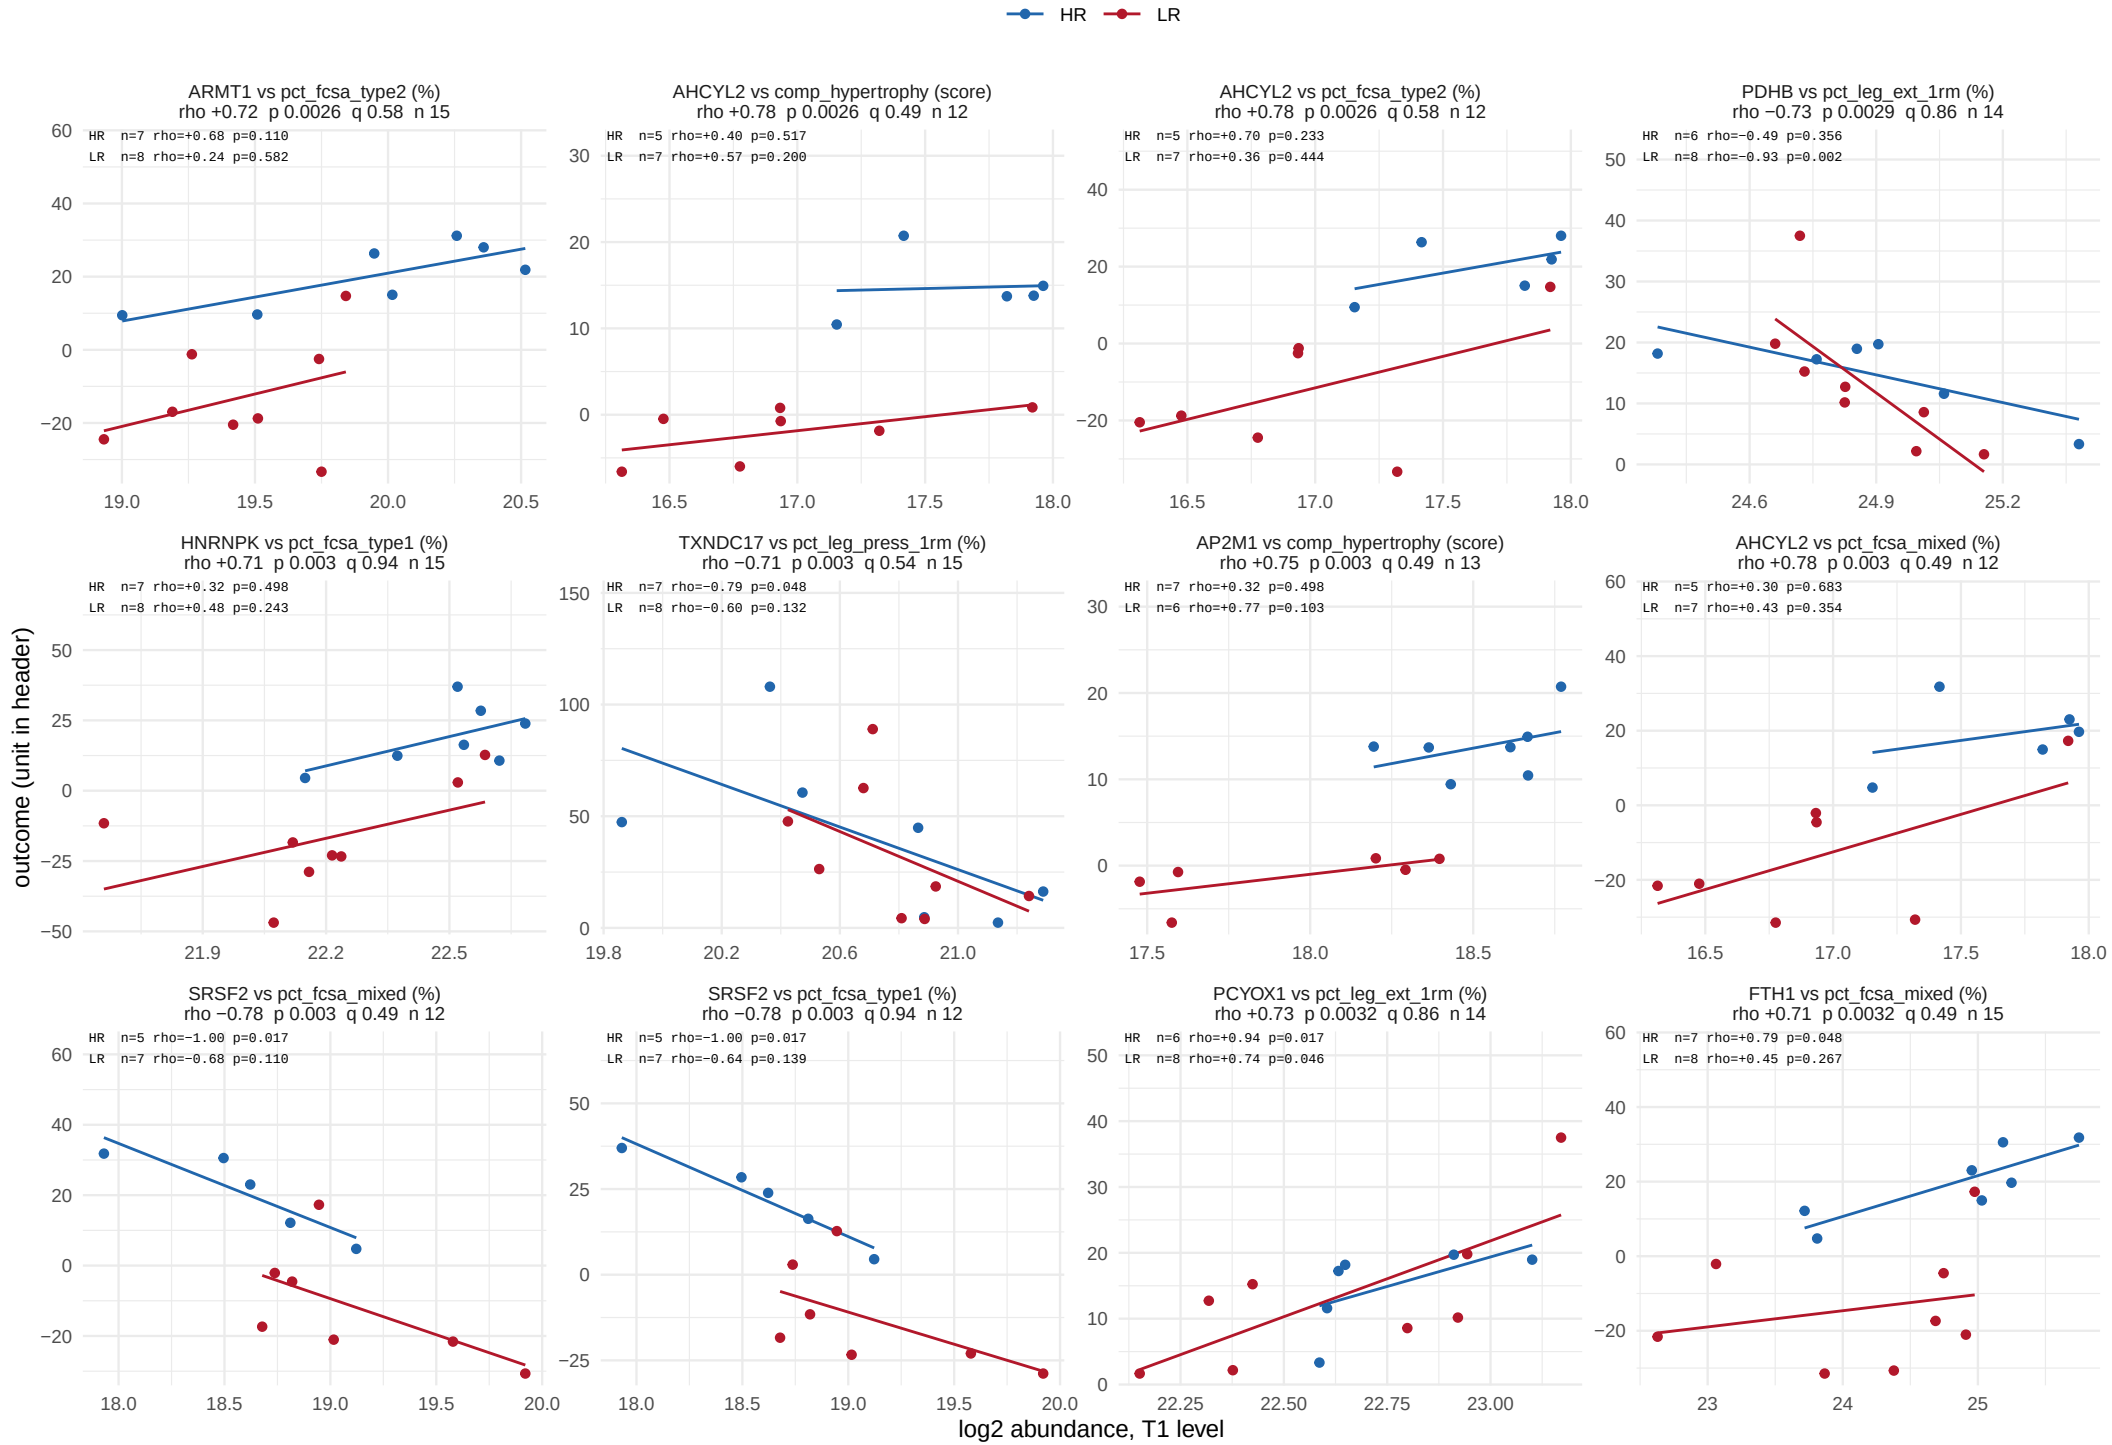

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


654 of 12553 feature−outcome pairs at p < 0.05, 8 at BH < 0.05. Page 5 of 55.

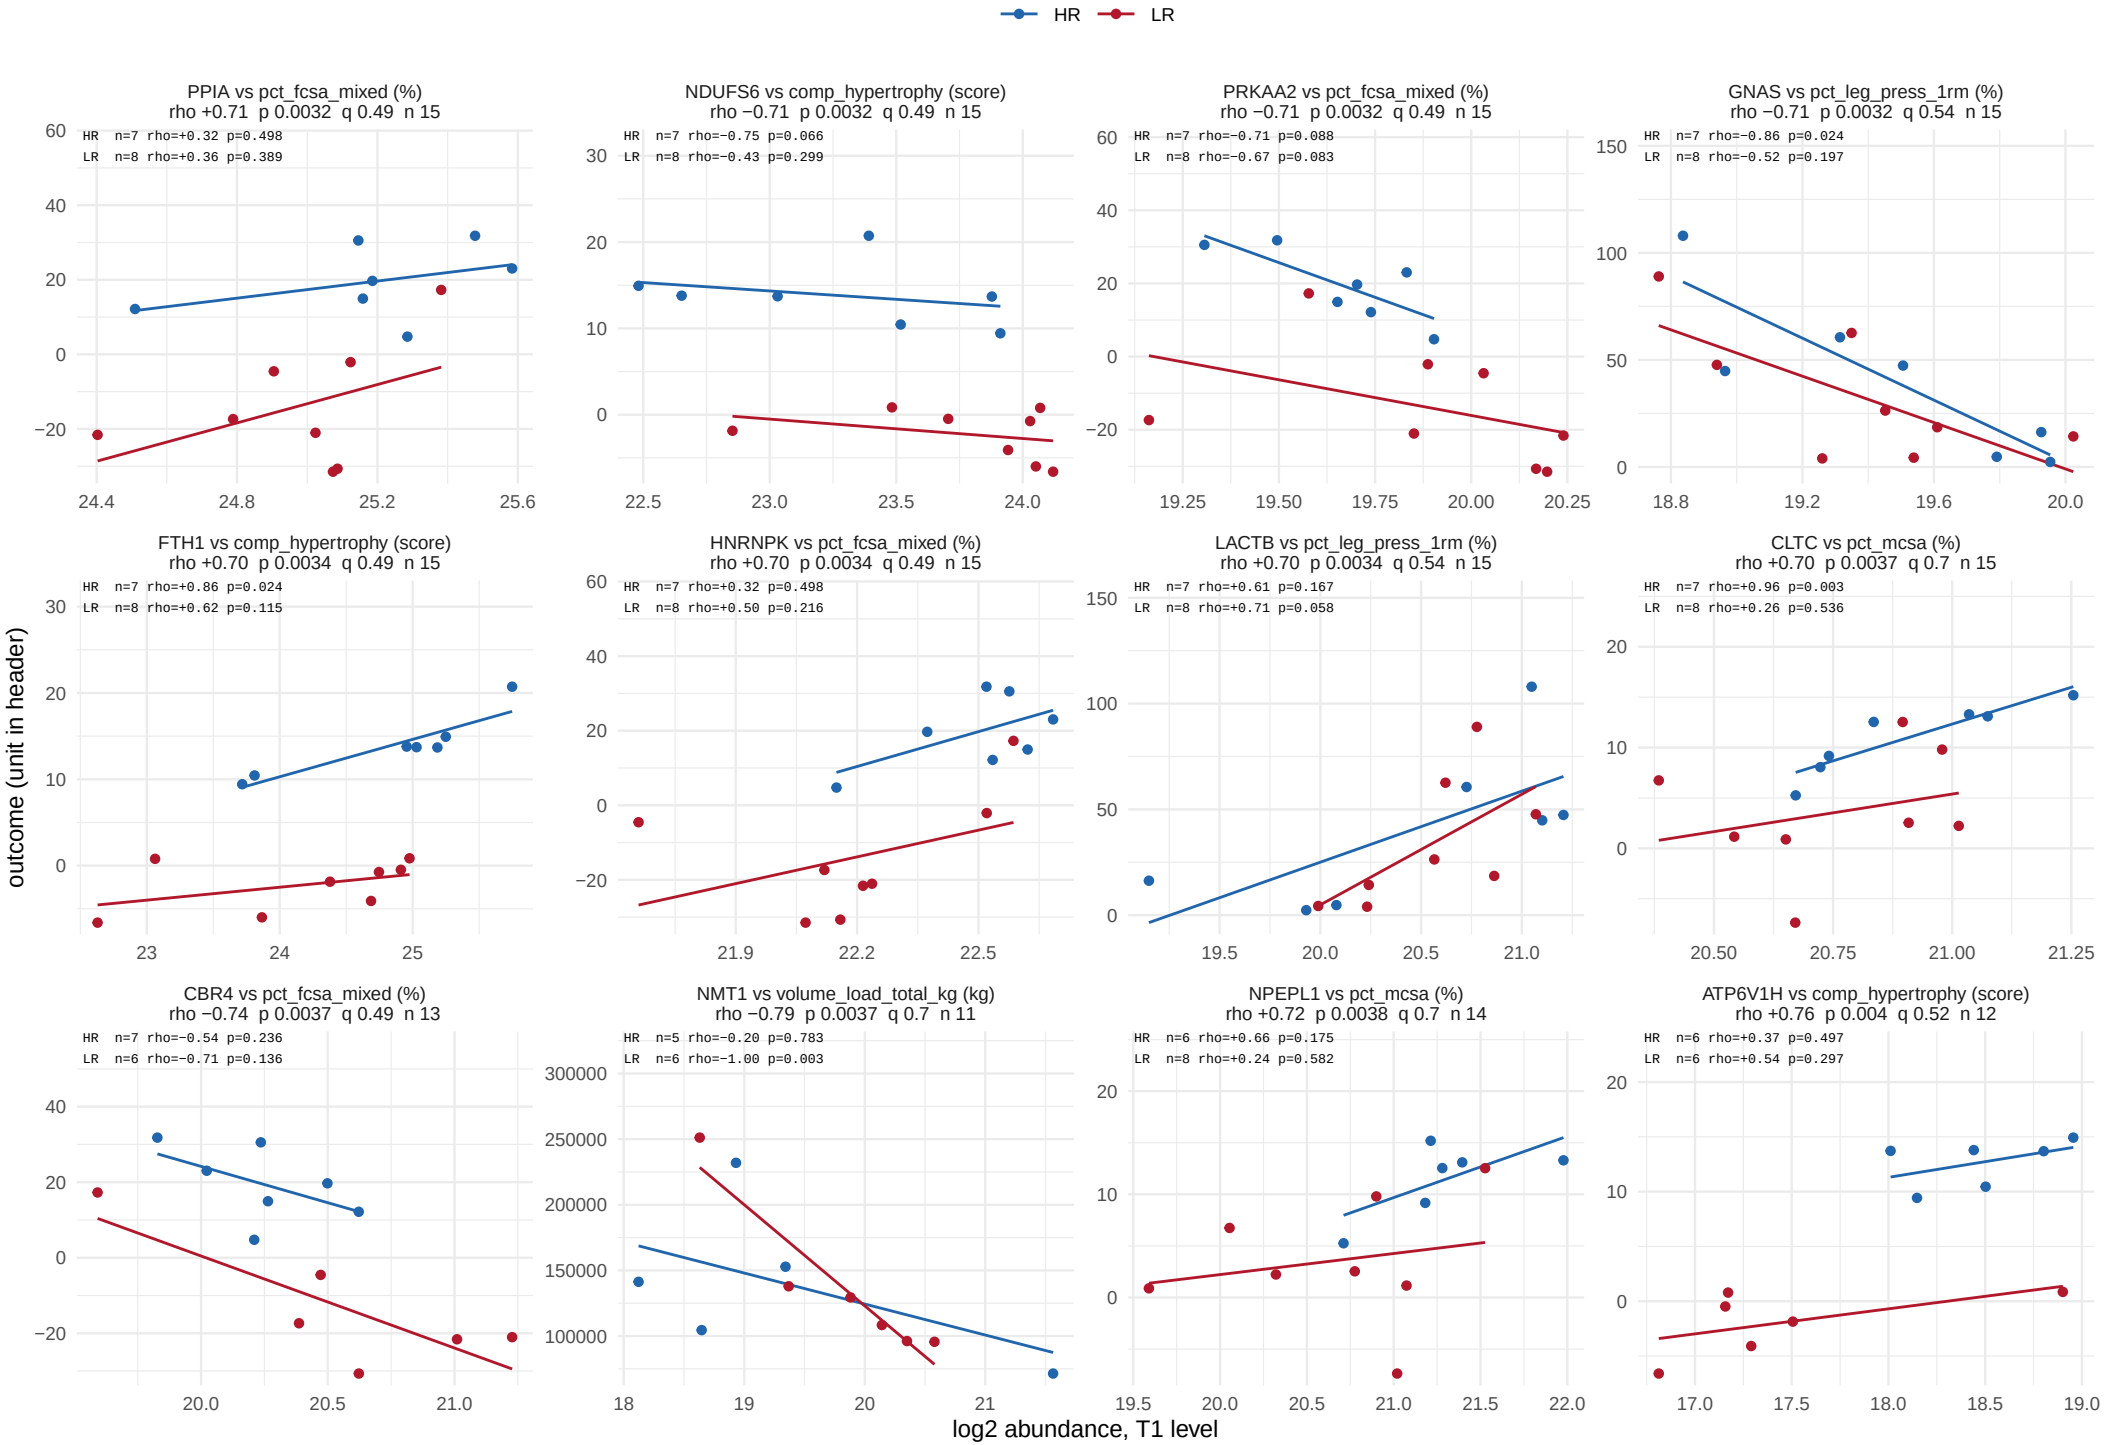

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


654 of 12553 feature−outcome pairs at p < 0.05, 8 at BH < 0.05. Page 6 of 55.

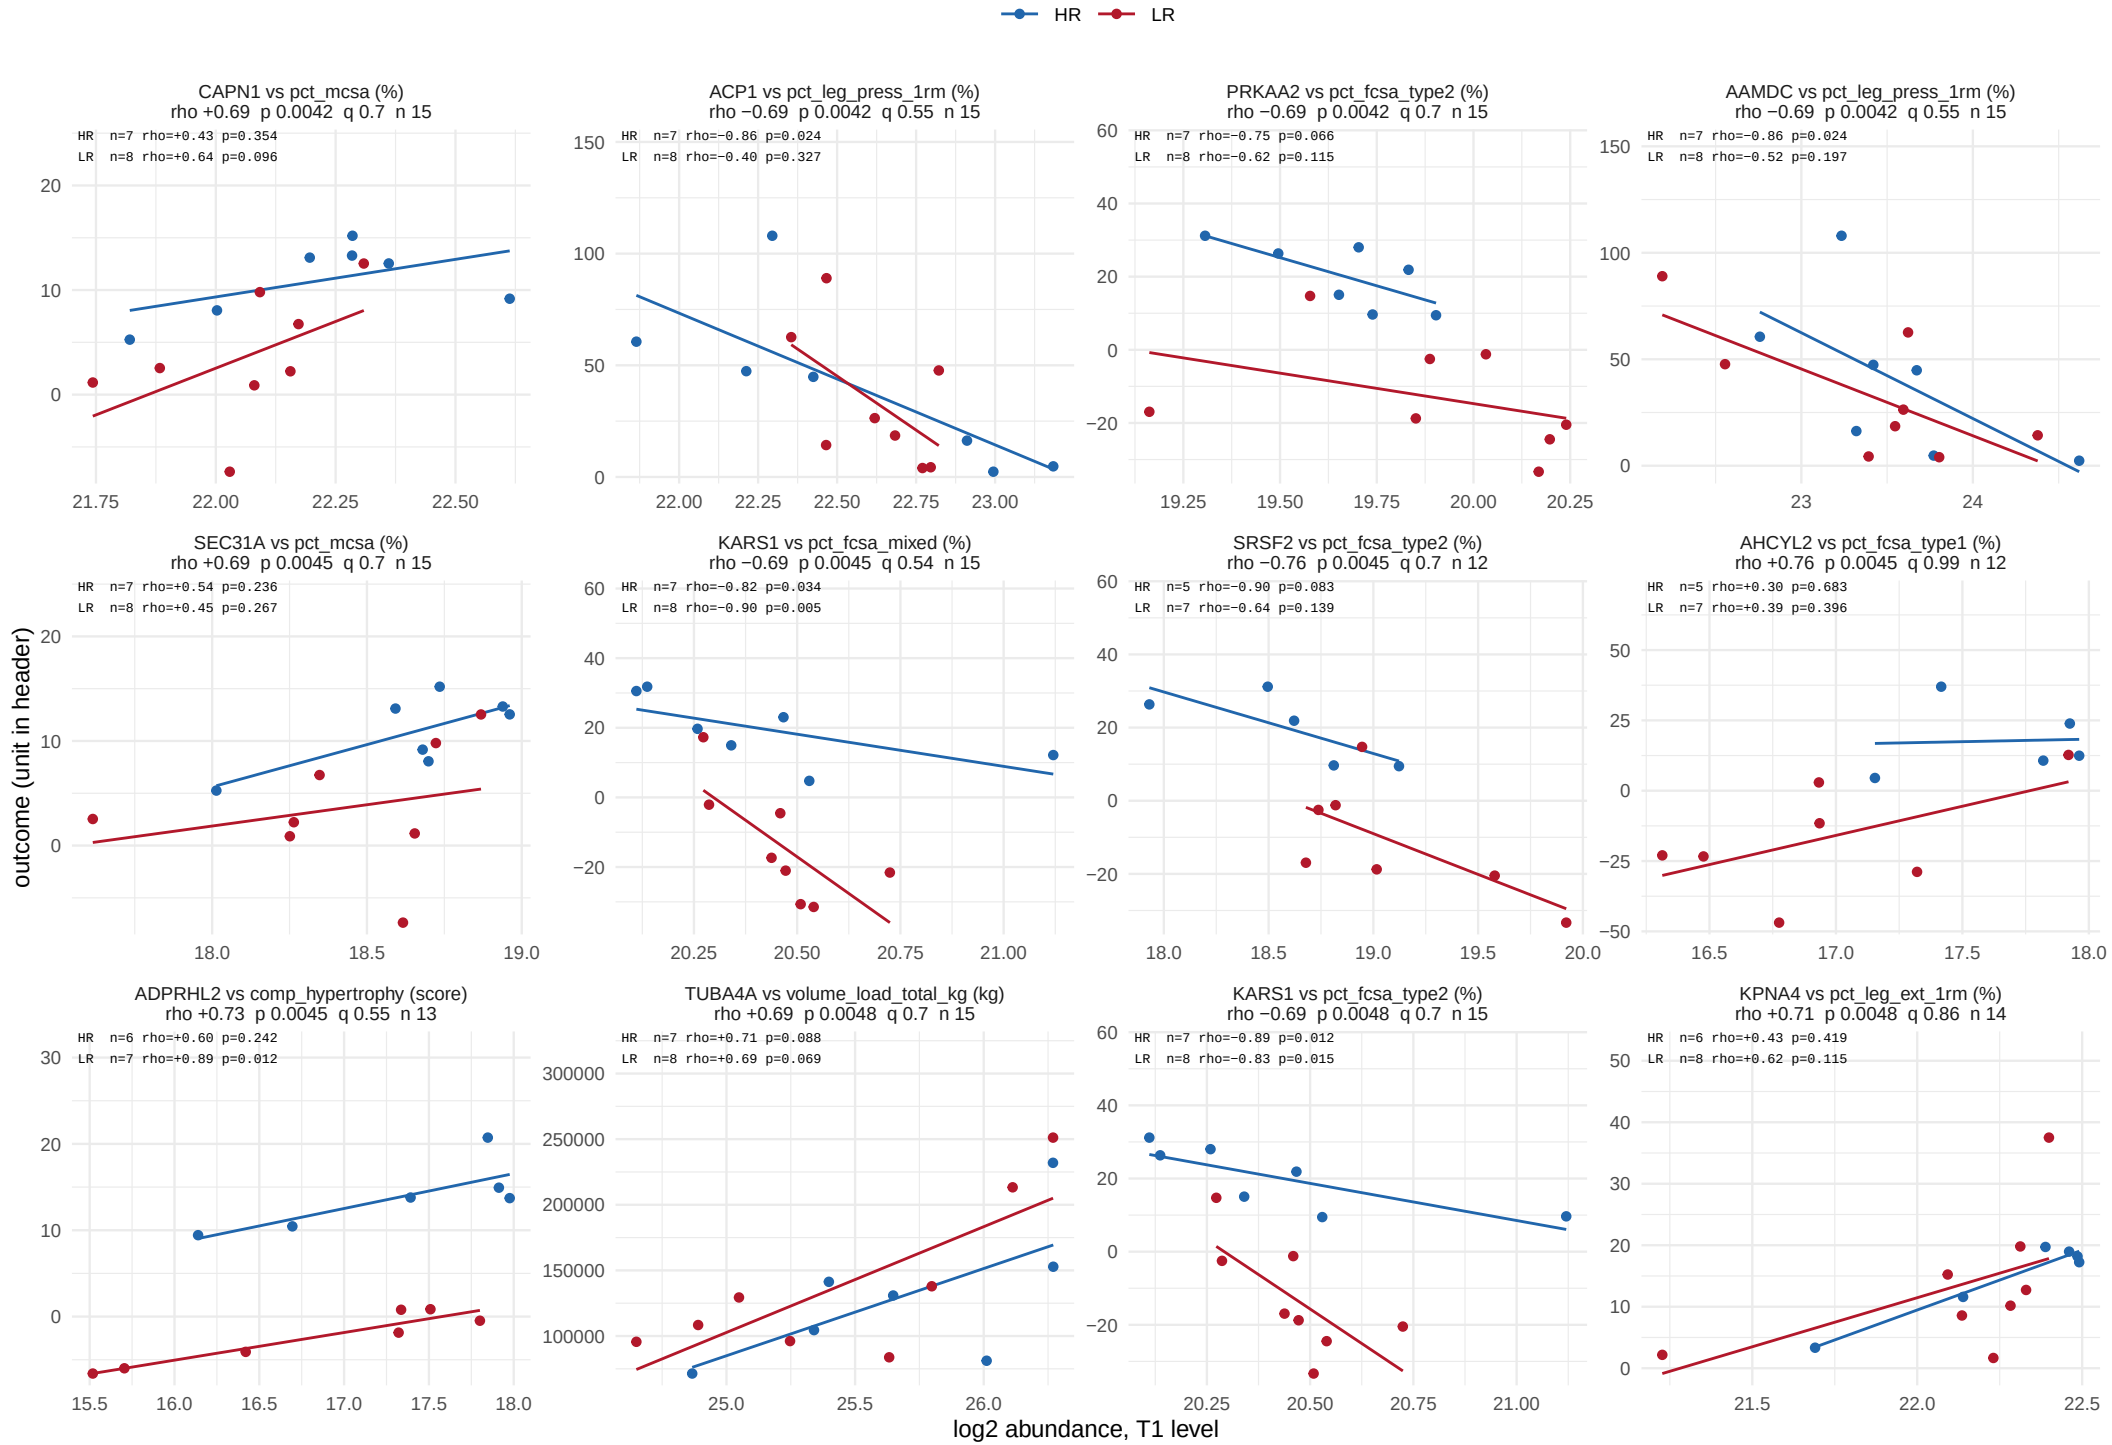

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


654 of 12553 feature−outcome pairs at p < 0.05, 8 at BH < 0.05. Page 7 of 55.

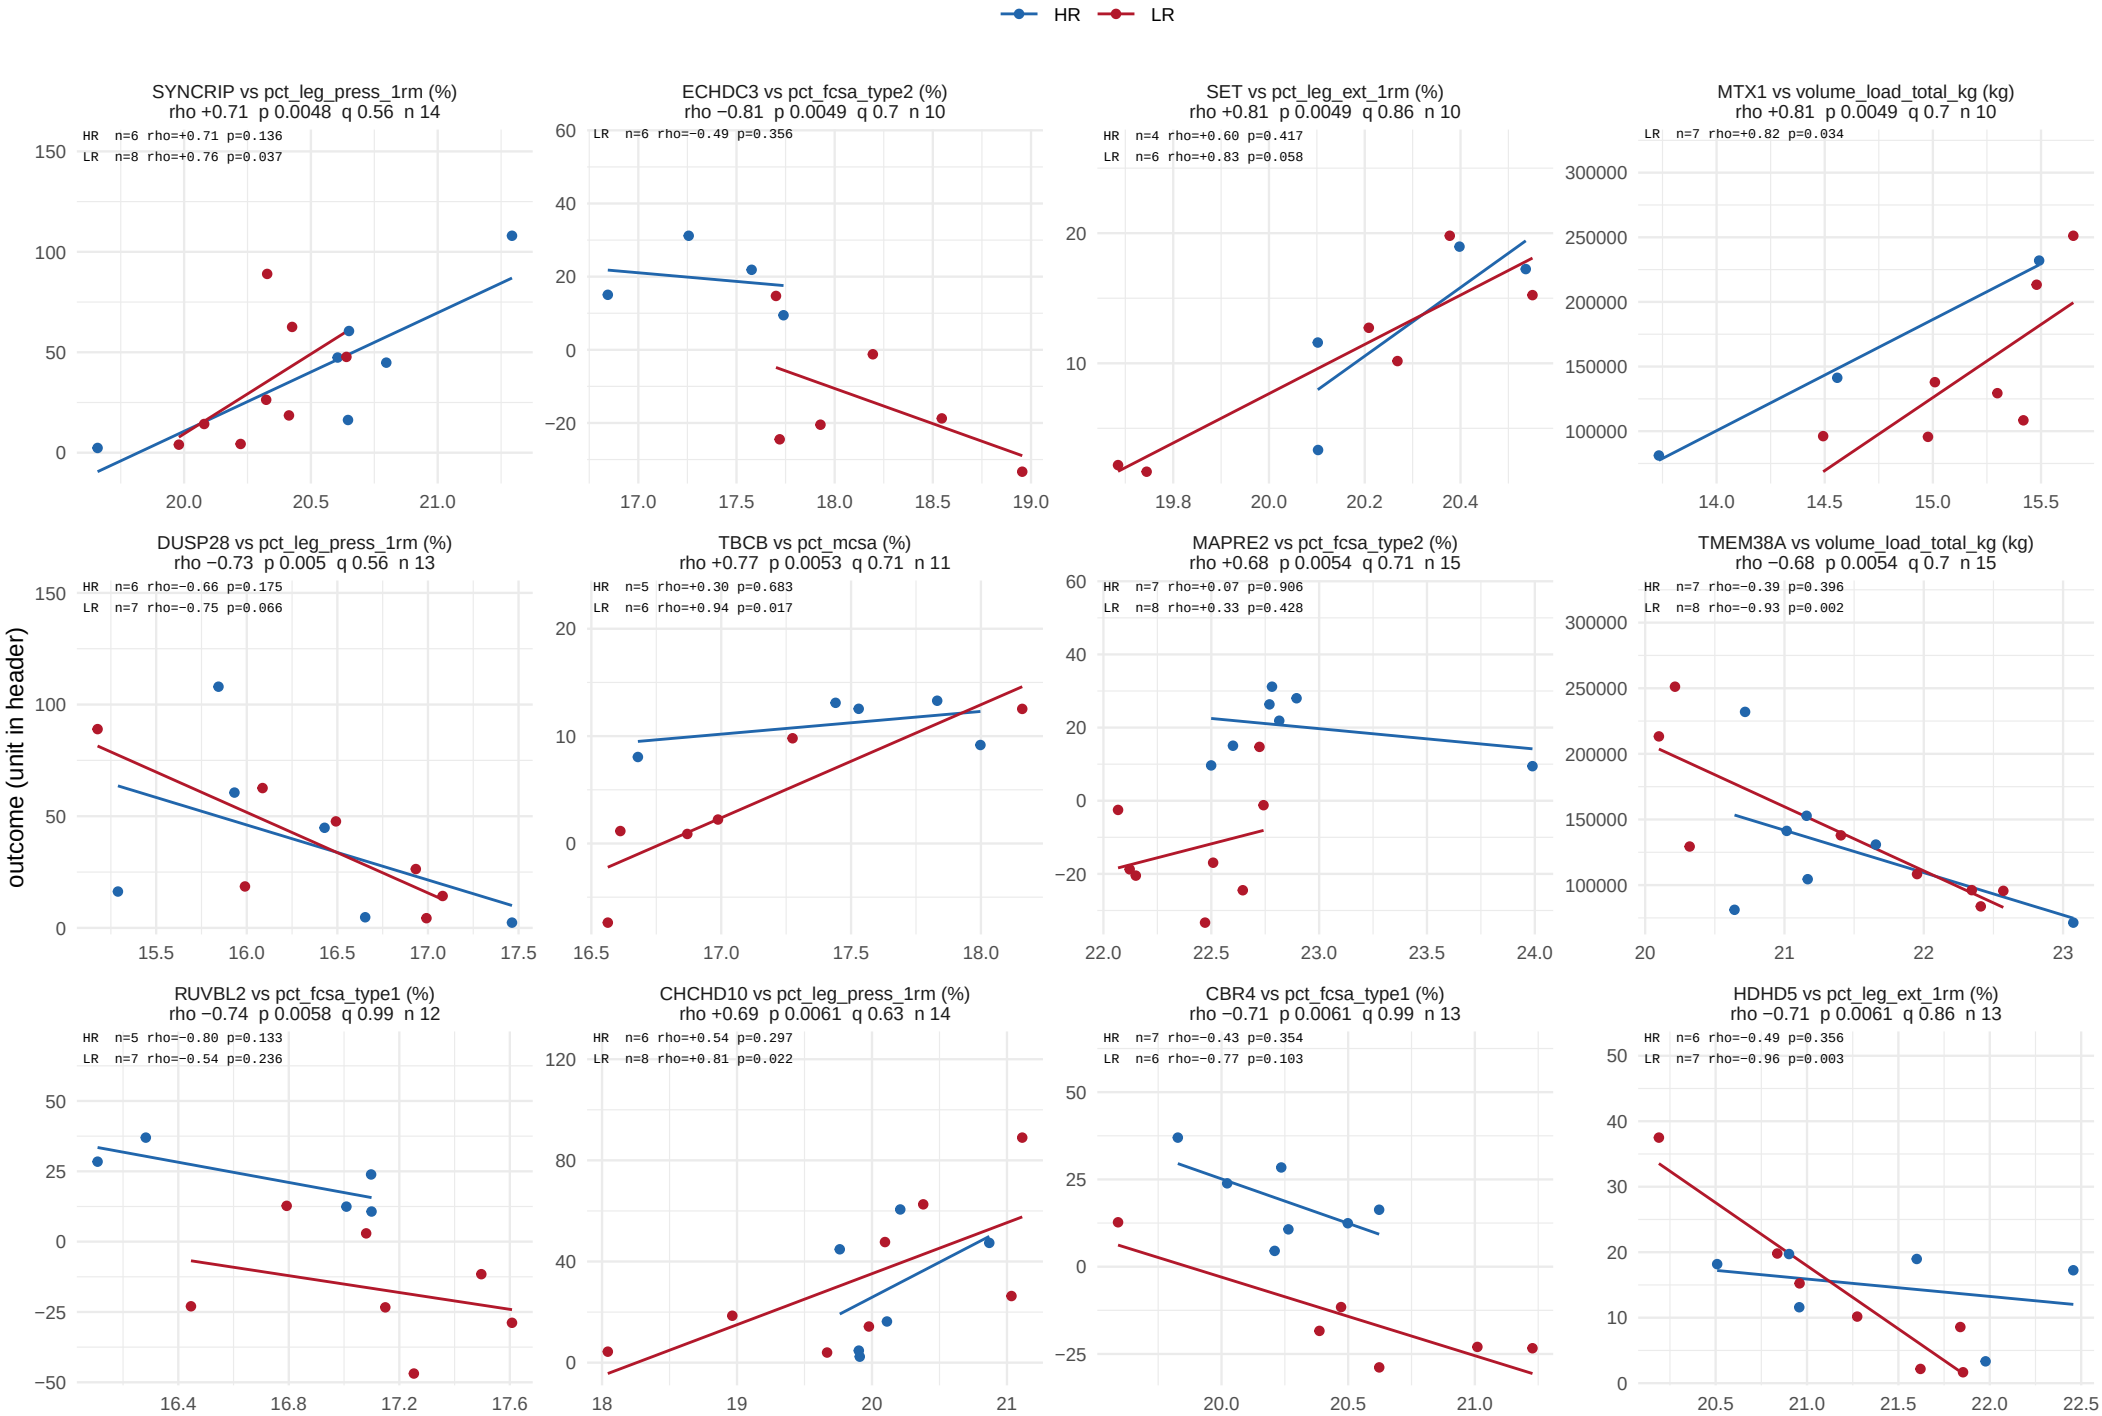

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


654 of 12553 feature−outcome pairs at p < 0.05, 8 at BH < 0.05. Page 8 of 55.

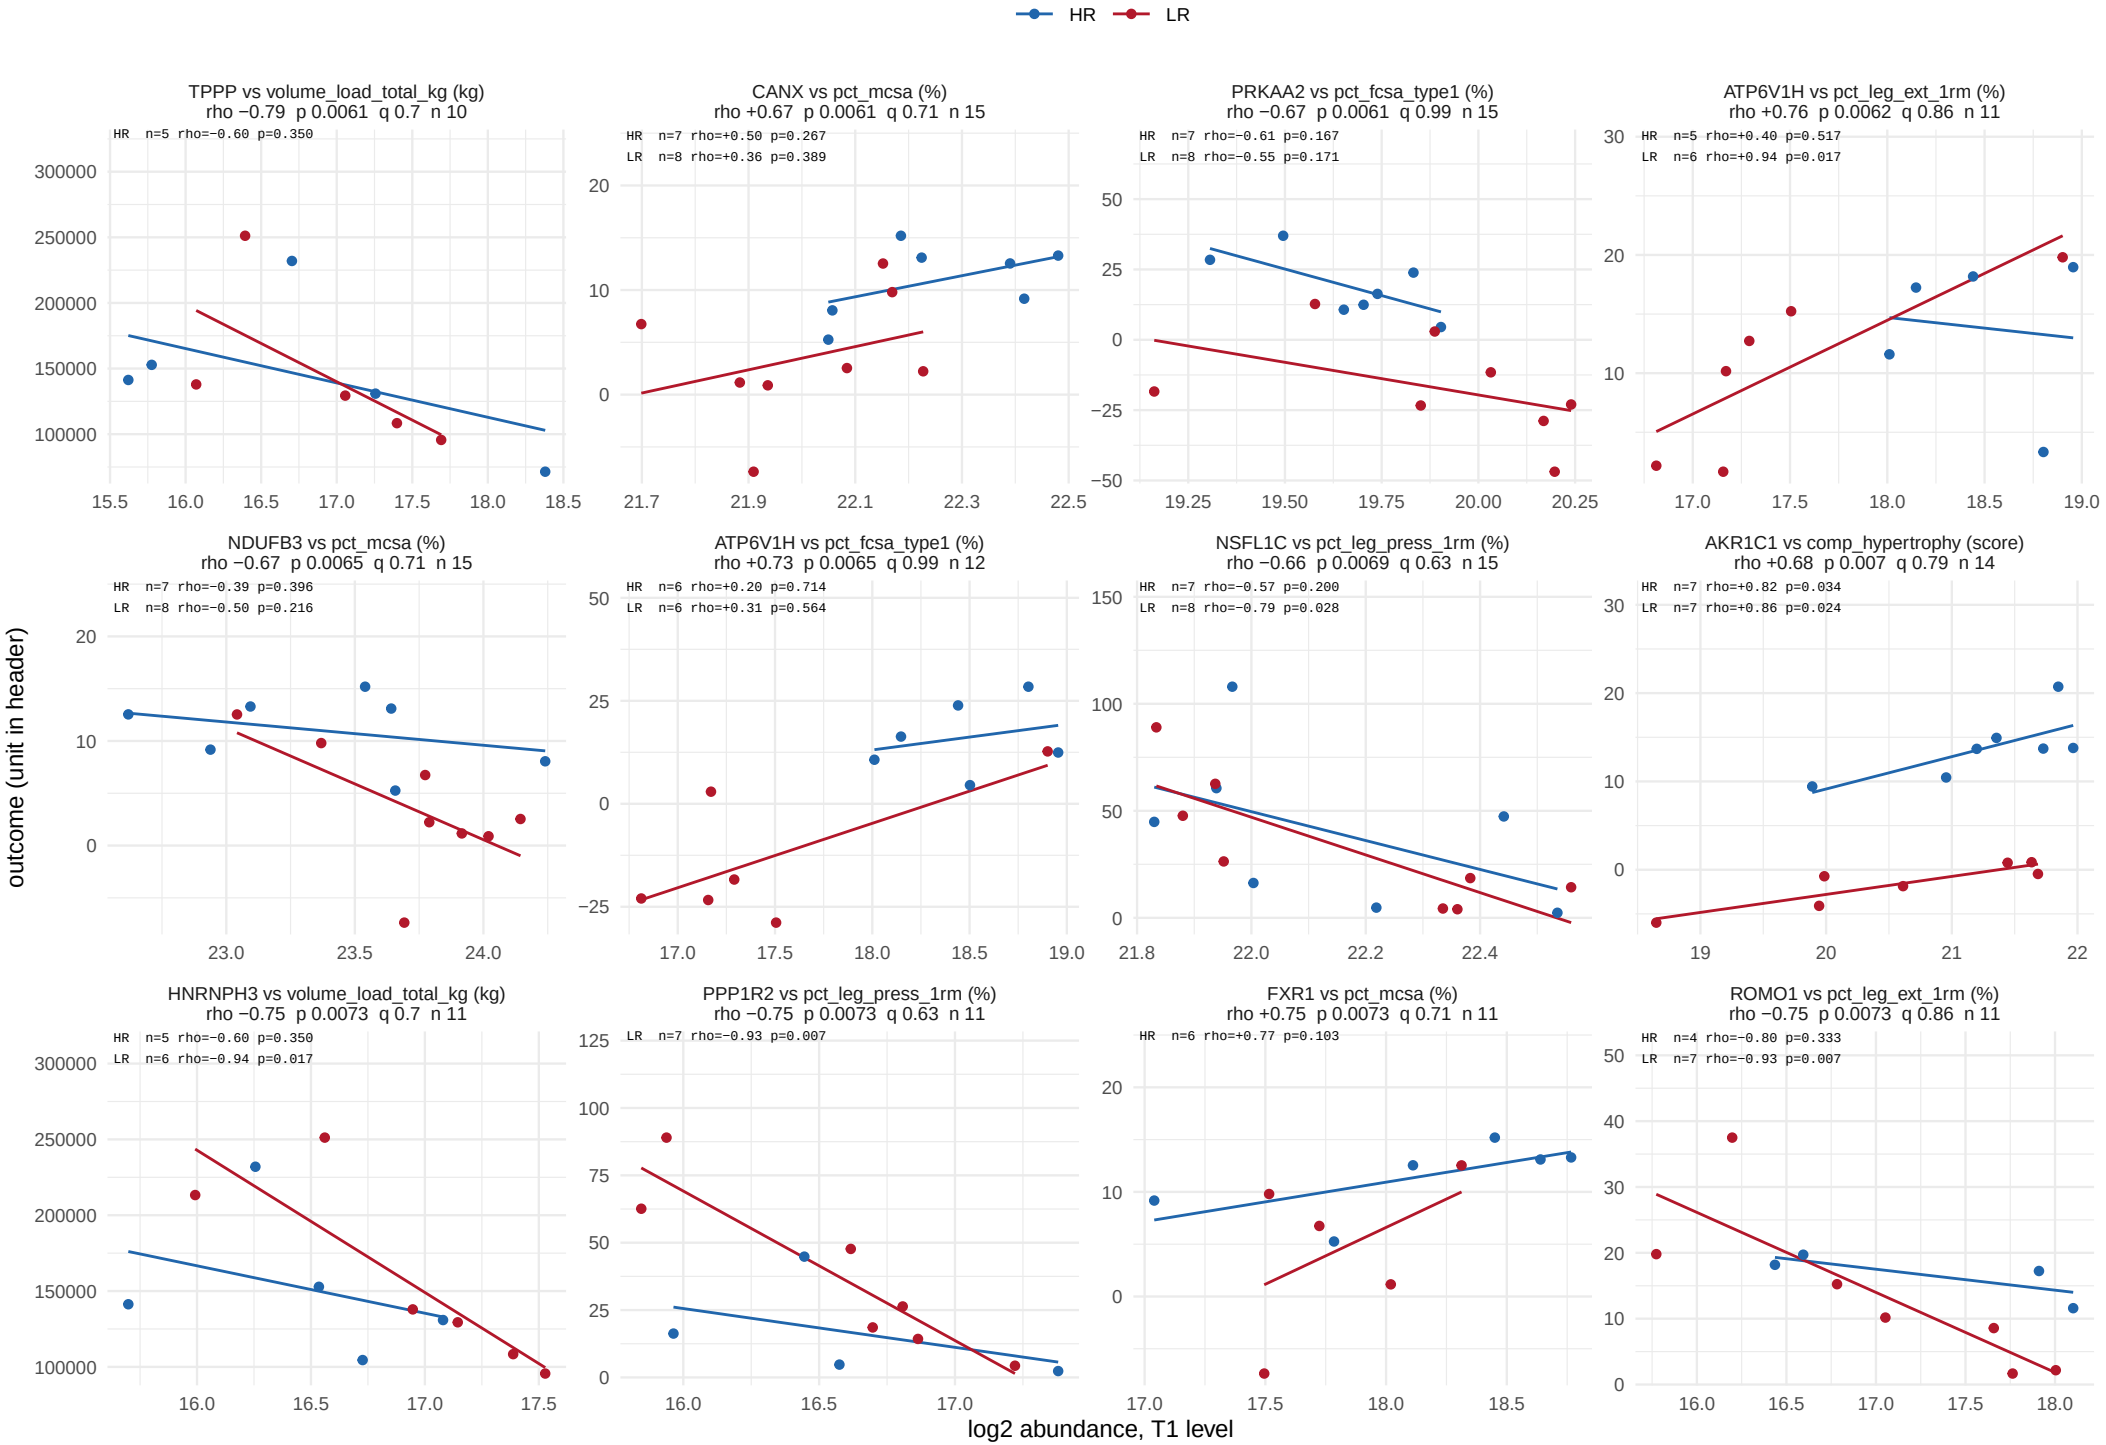

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


654 of 12553 feature−outcome pairs at p < 0.05, 8 at BH < 0.05. Page 9 of 55.

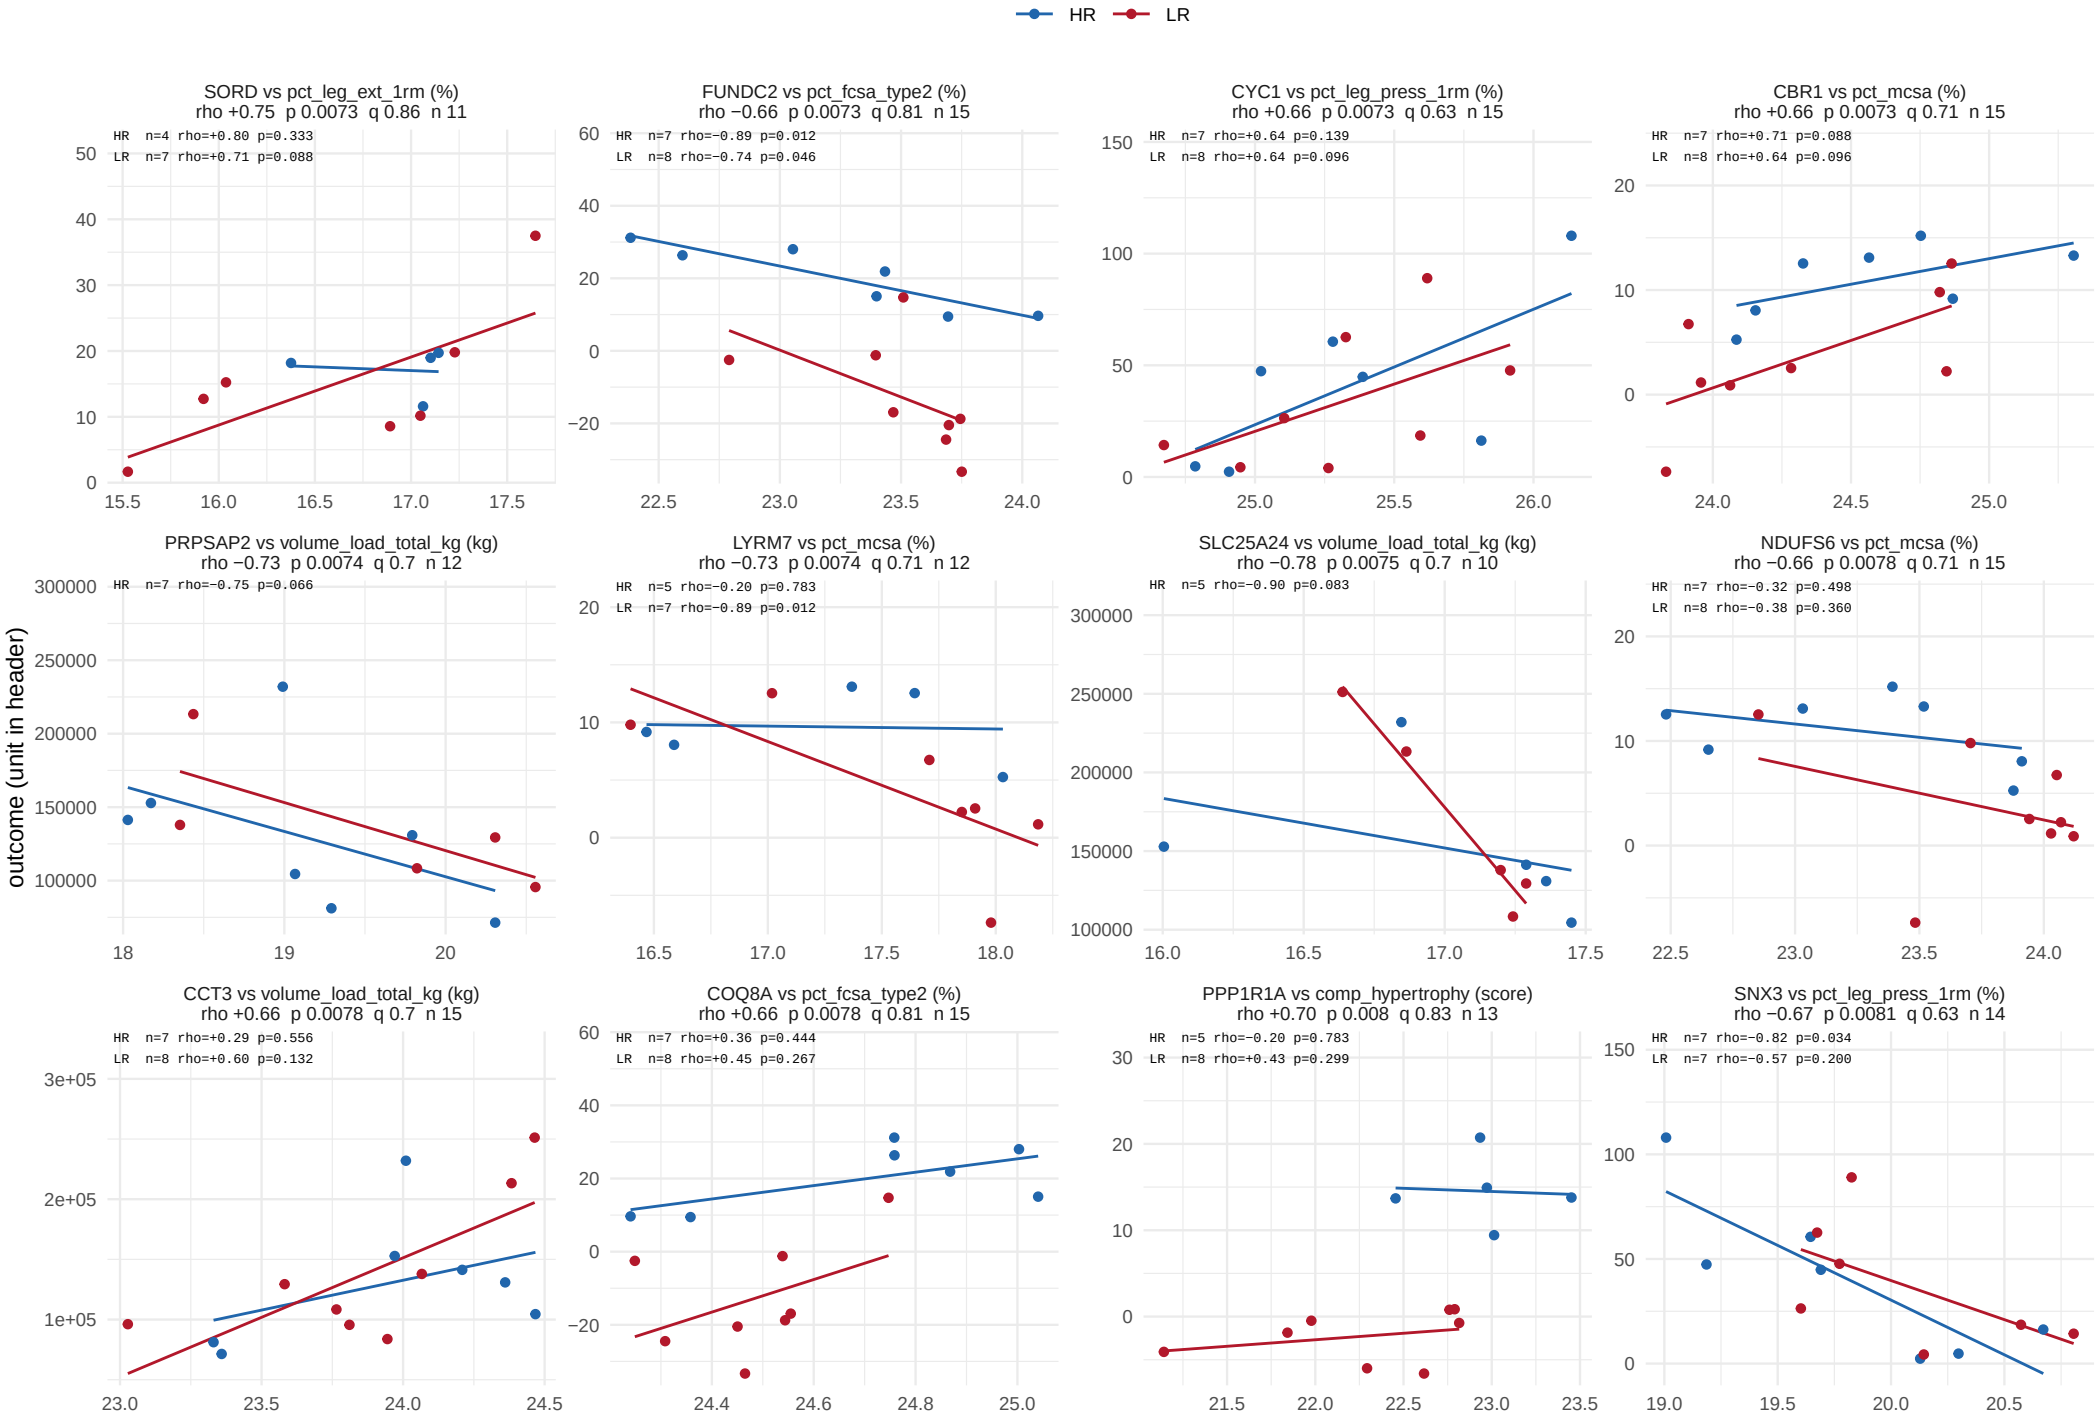

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


654 of 12553 feature−outcome pairs at p < 0.05, 8 at BH < 0.05. Page 10 of 55.

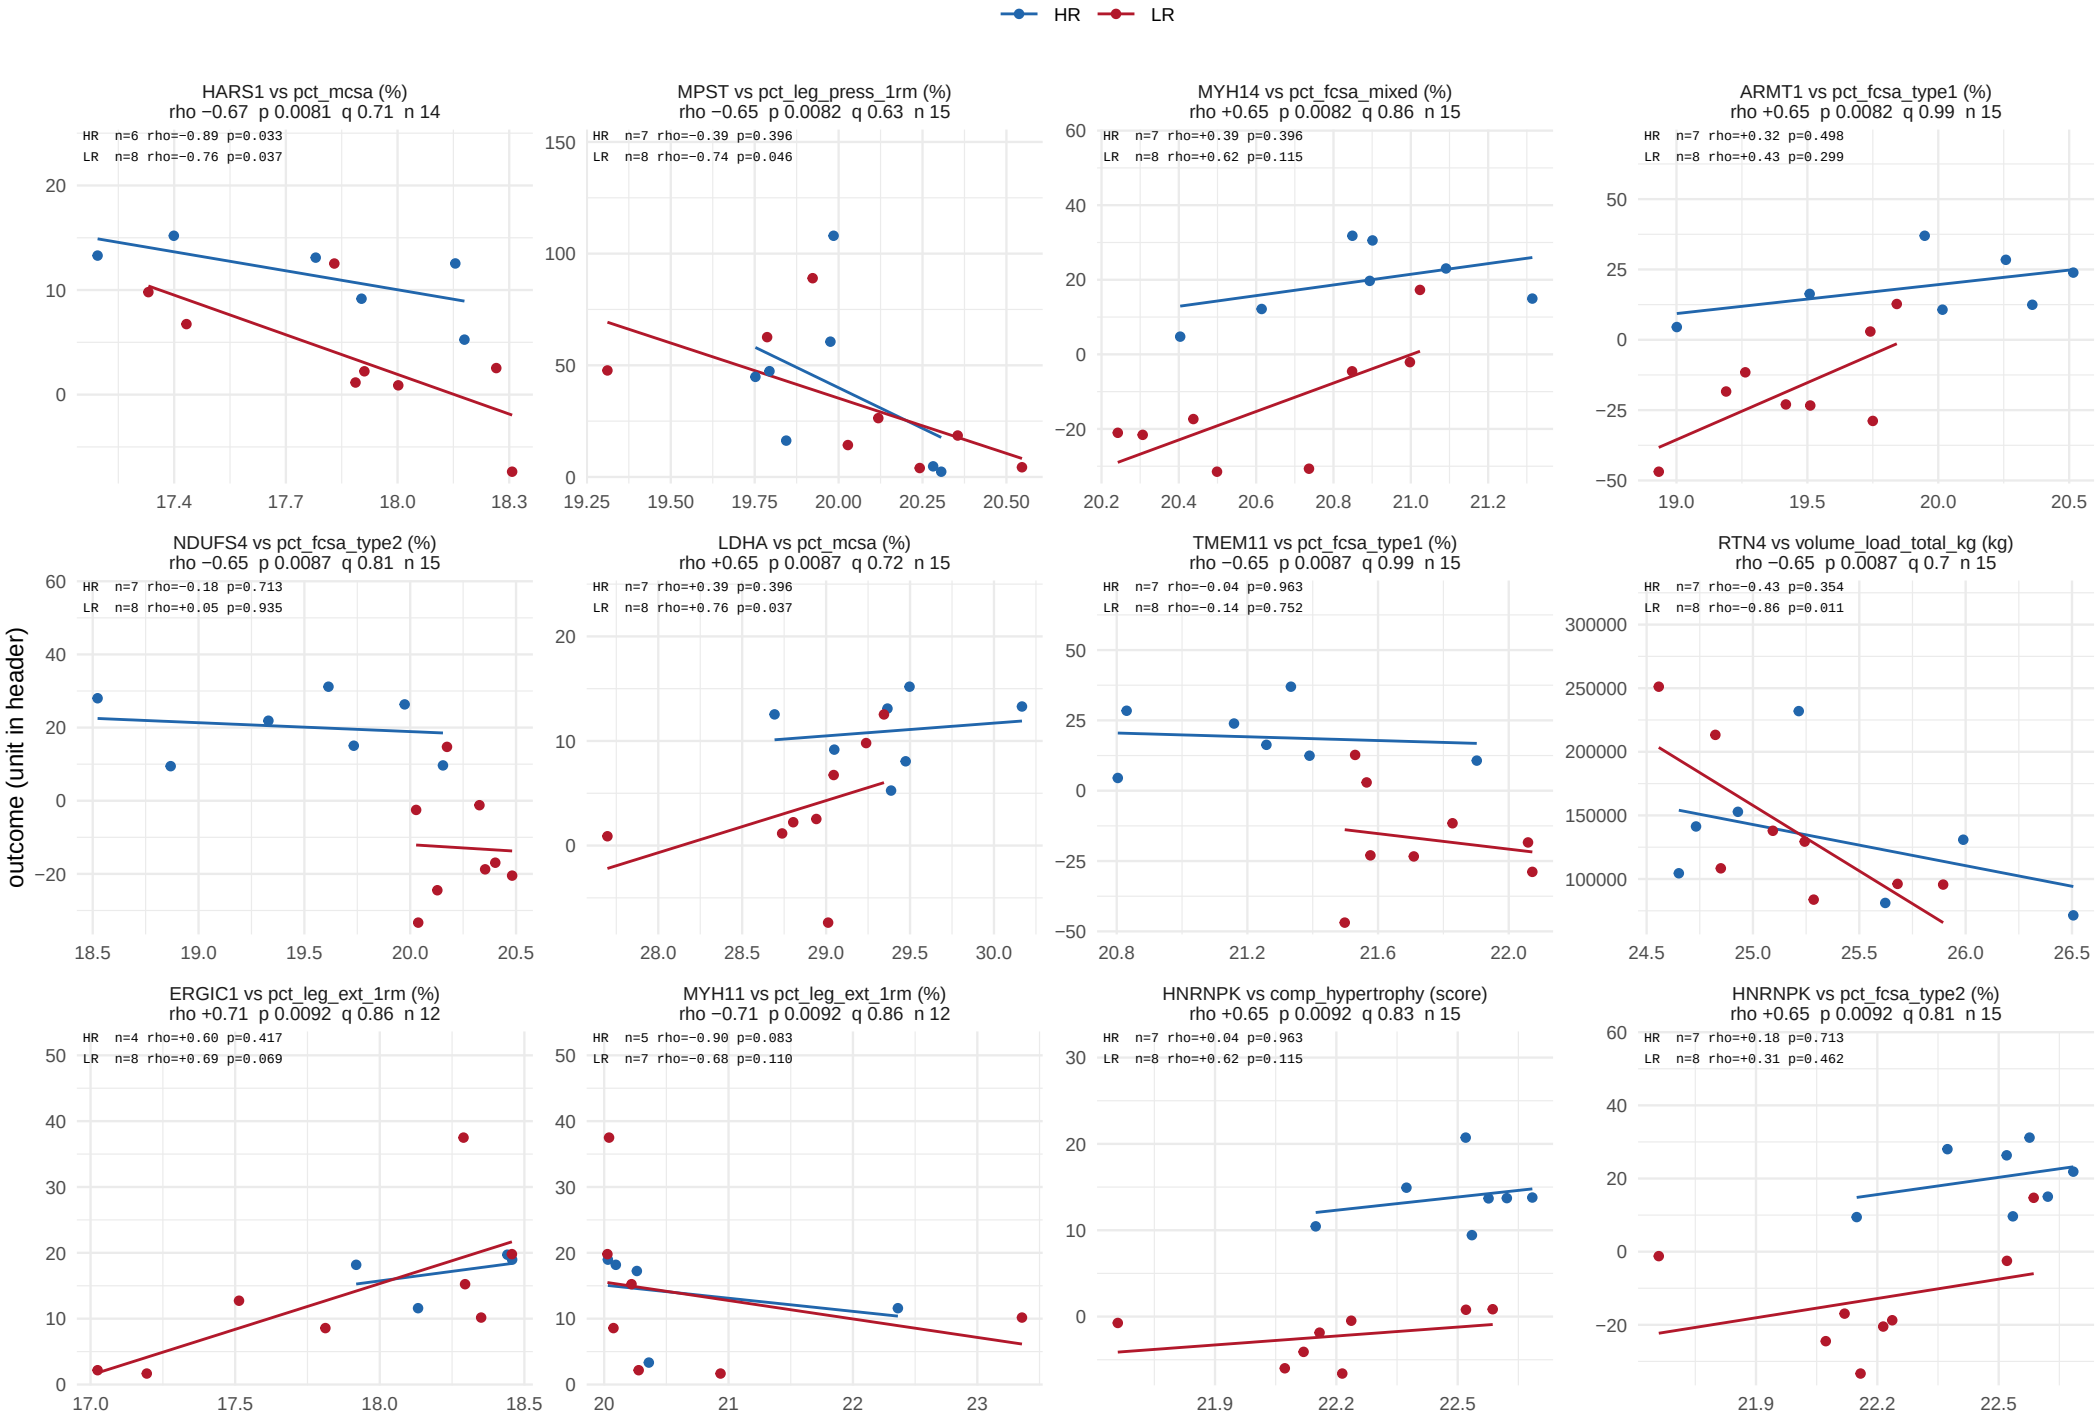

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


654 of 12553 feature−outcome pairs at p < 0.05, 8 at BH < 0.05. Page 11 of 55.

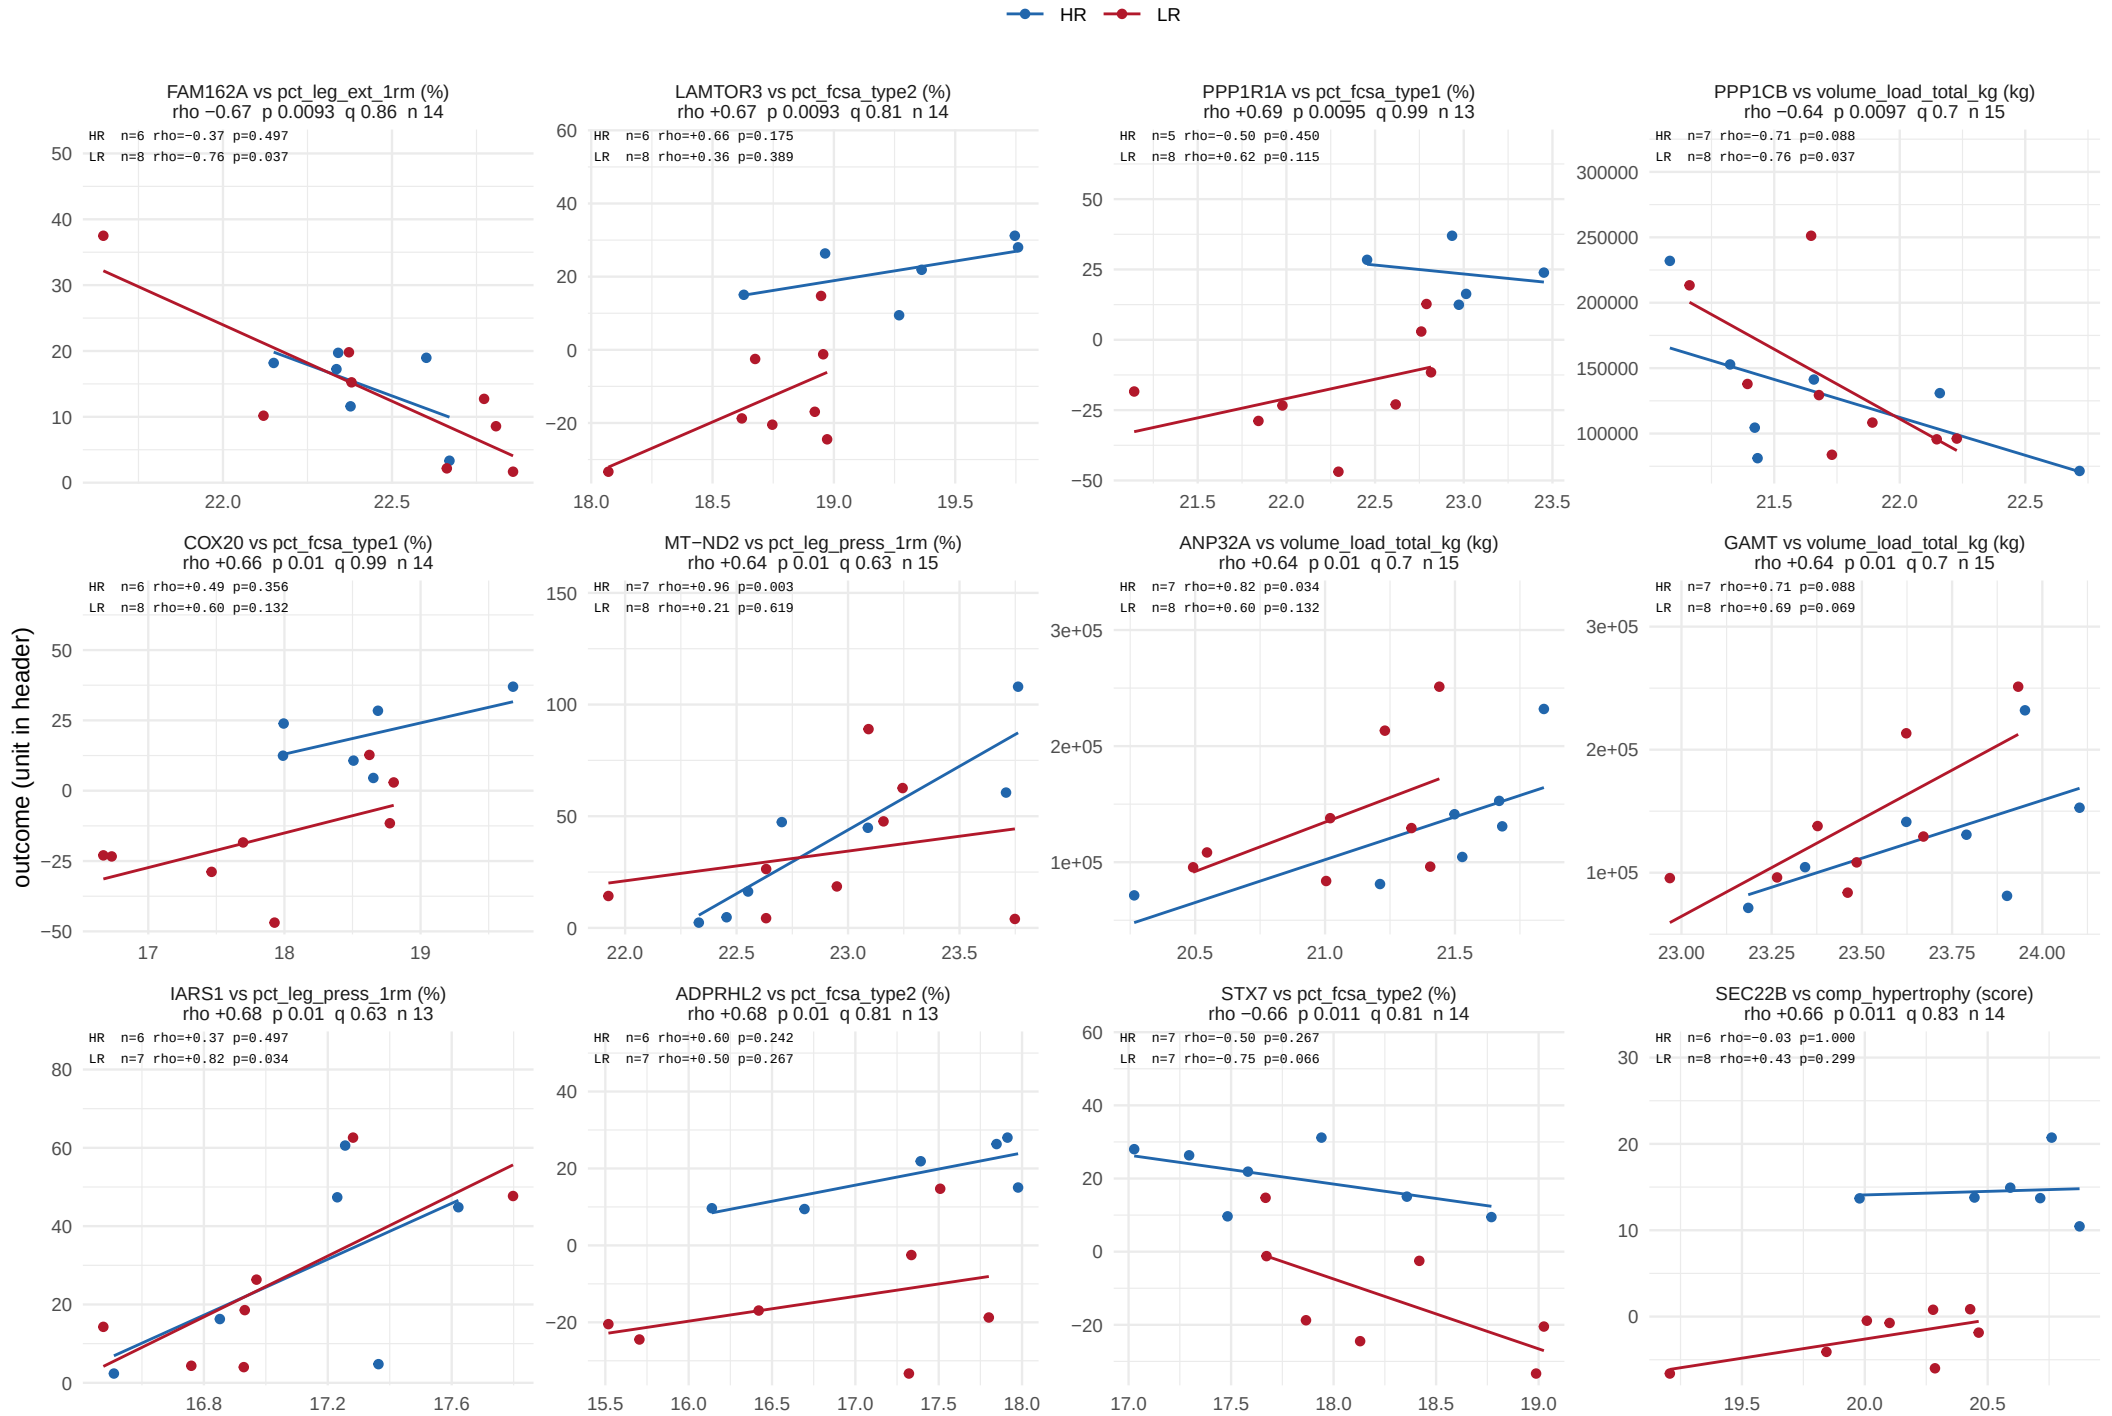

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


654 of 12553 feature−outcome pairs at p < 0.05, 8 at BH < 0.05. Page 12 of 55.

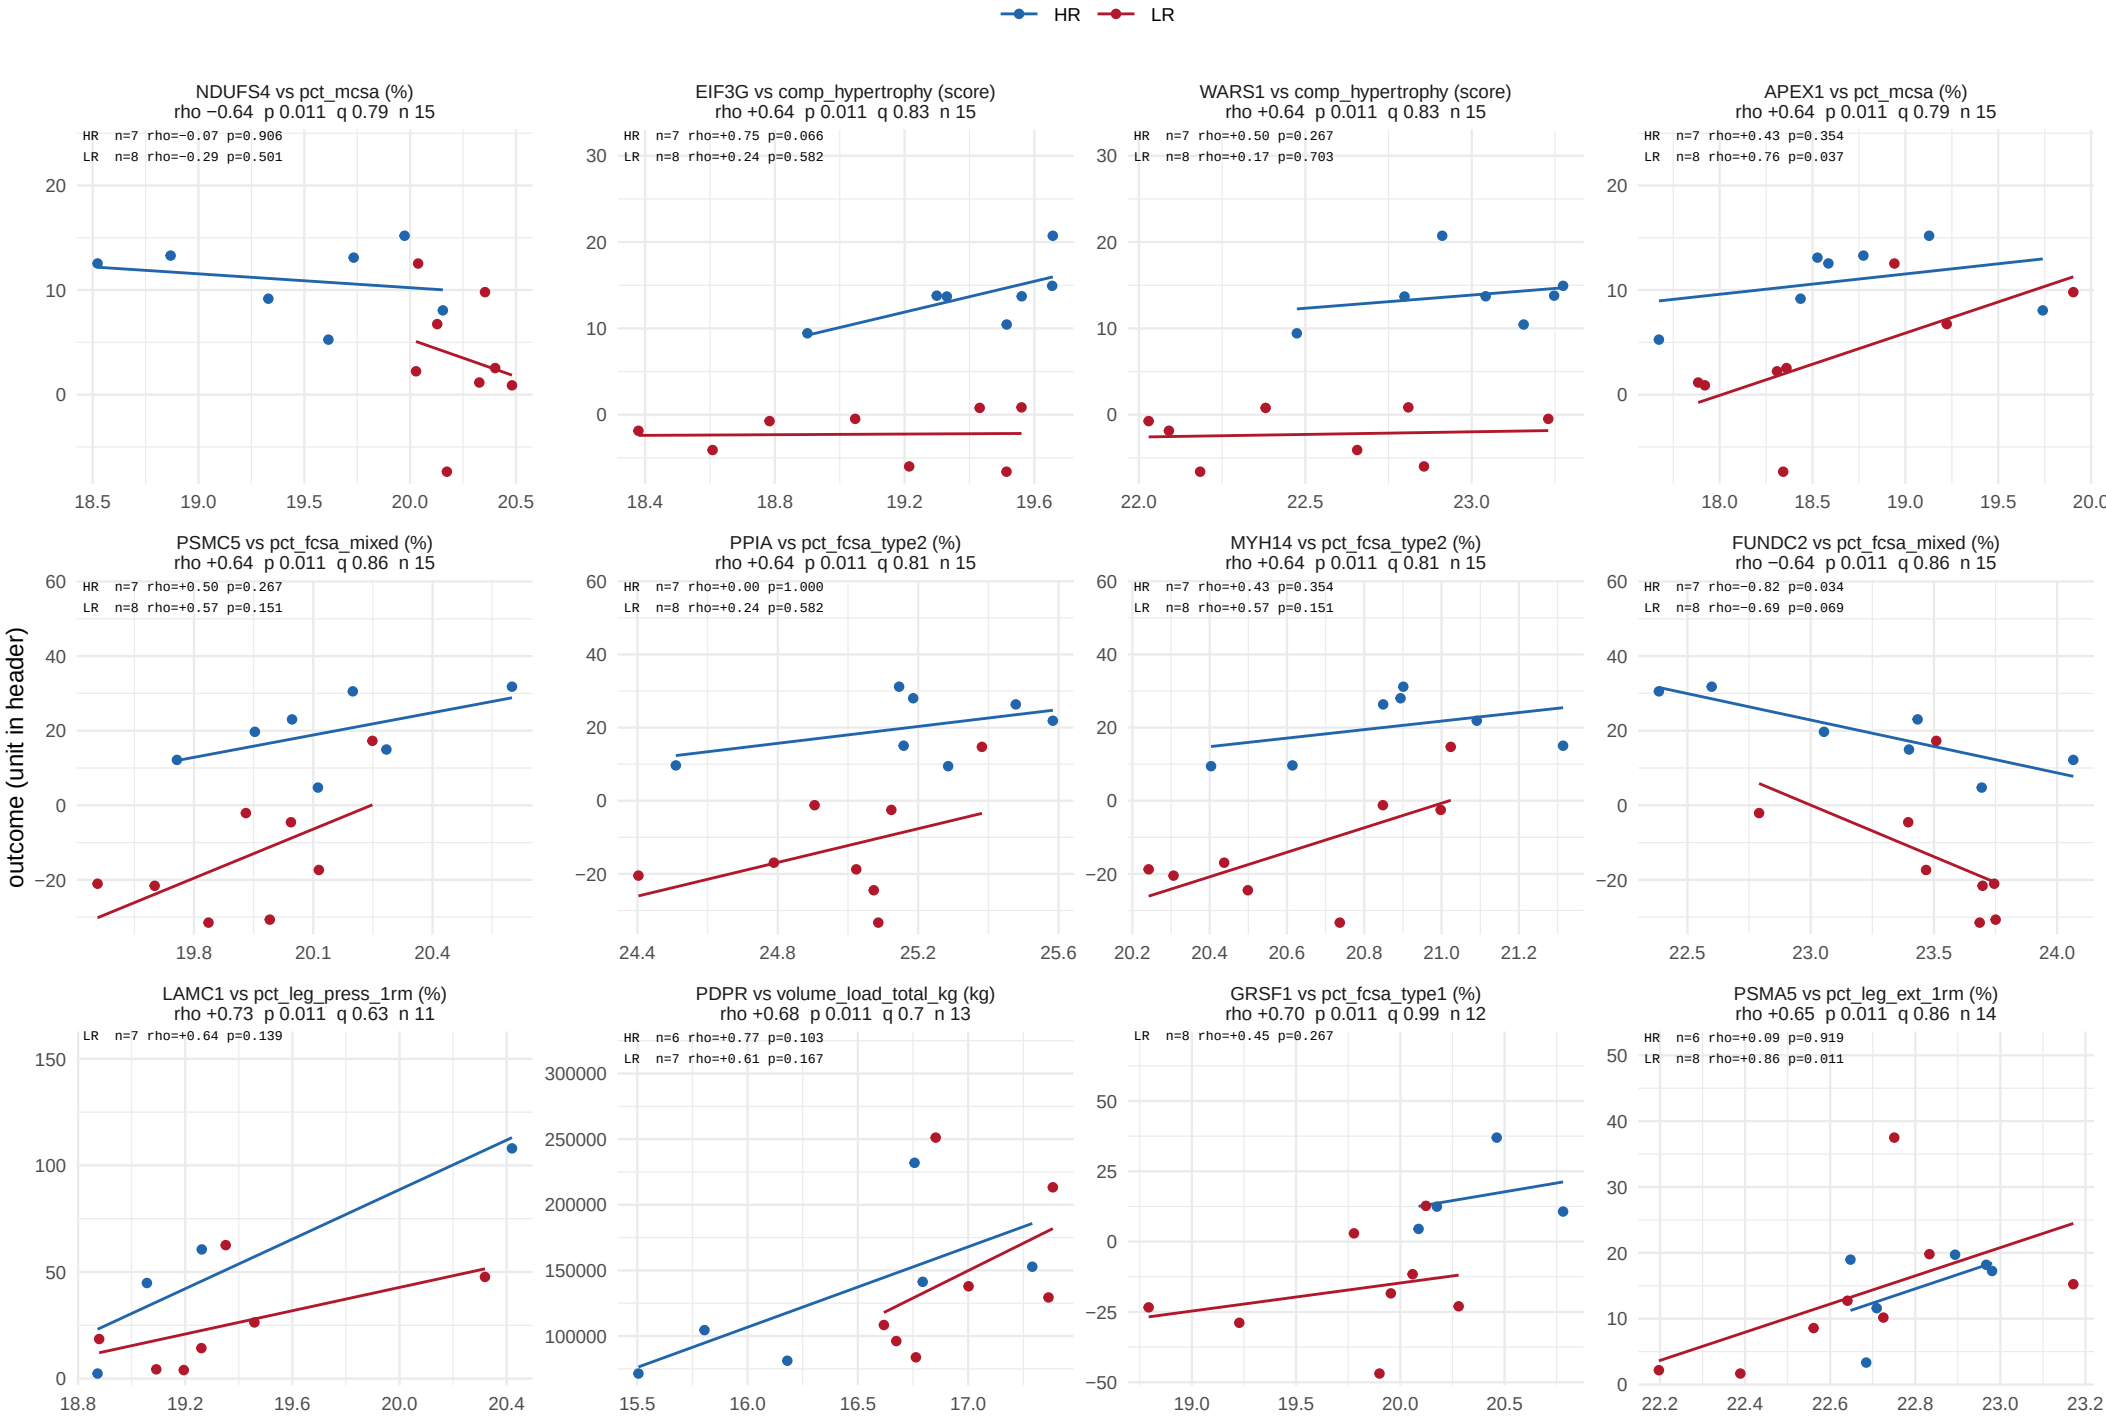

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


654 of 12553 feature−outcome pairs at p < 0.05, 8 at BH < 0.05. Page 13 of 55.

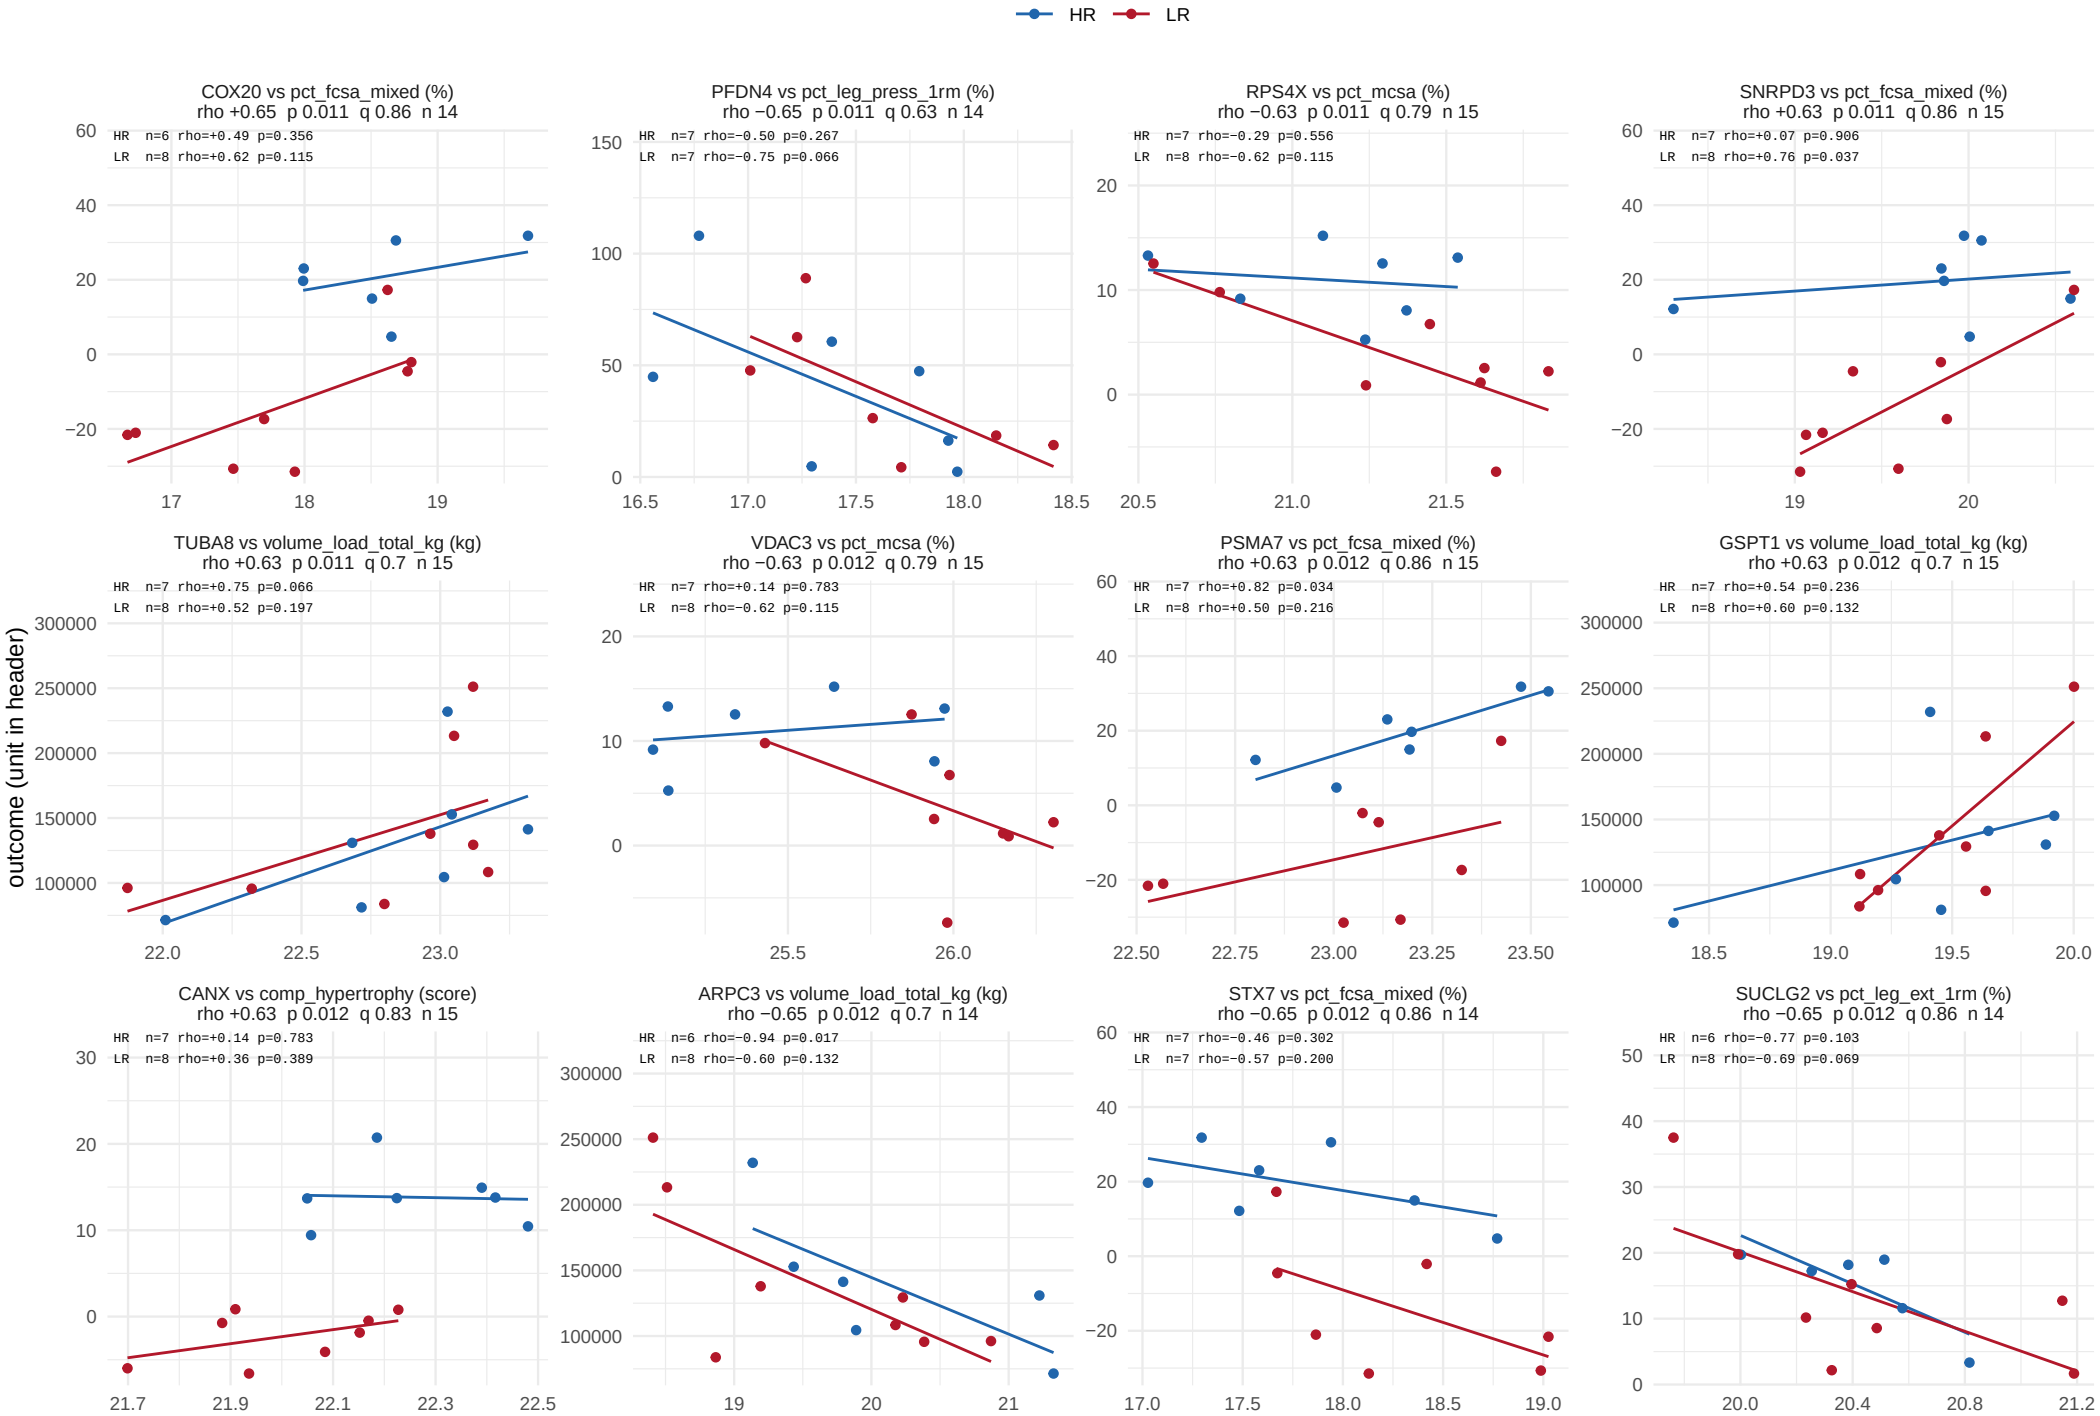

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


654 of 12553 feature−outcome pairs at p < 0.05, 8 at BH < 0.05. Page 14 of 55.

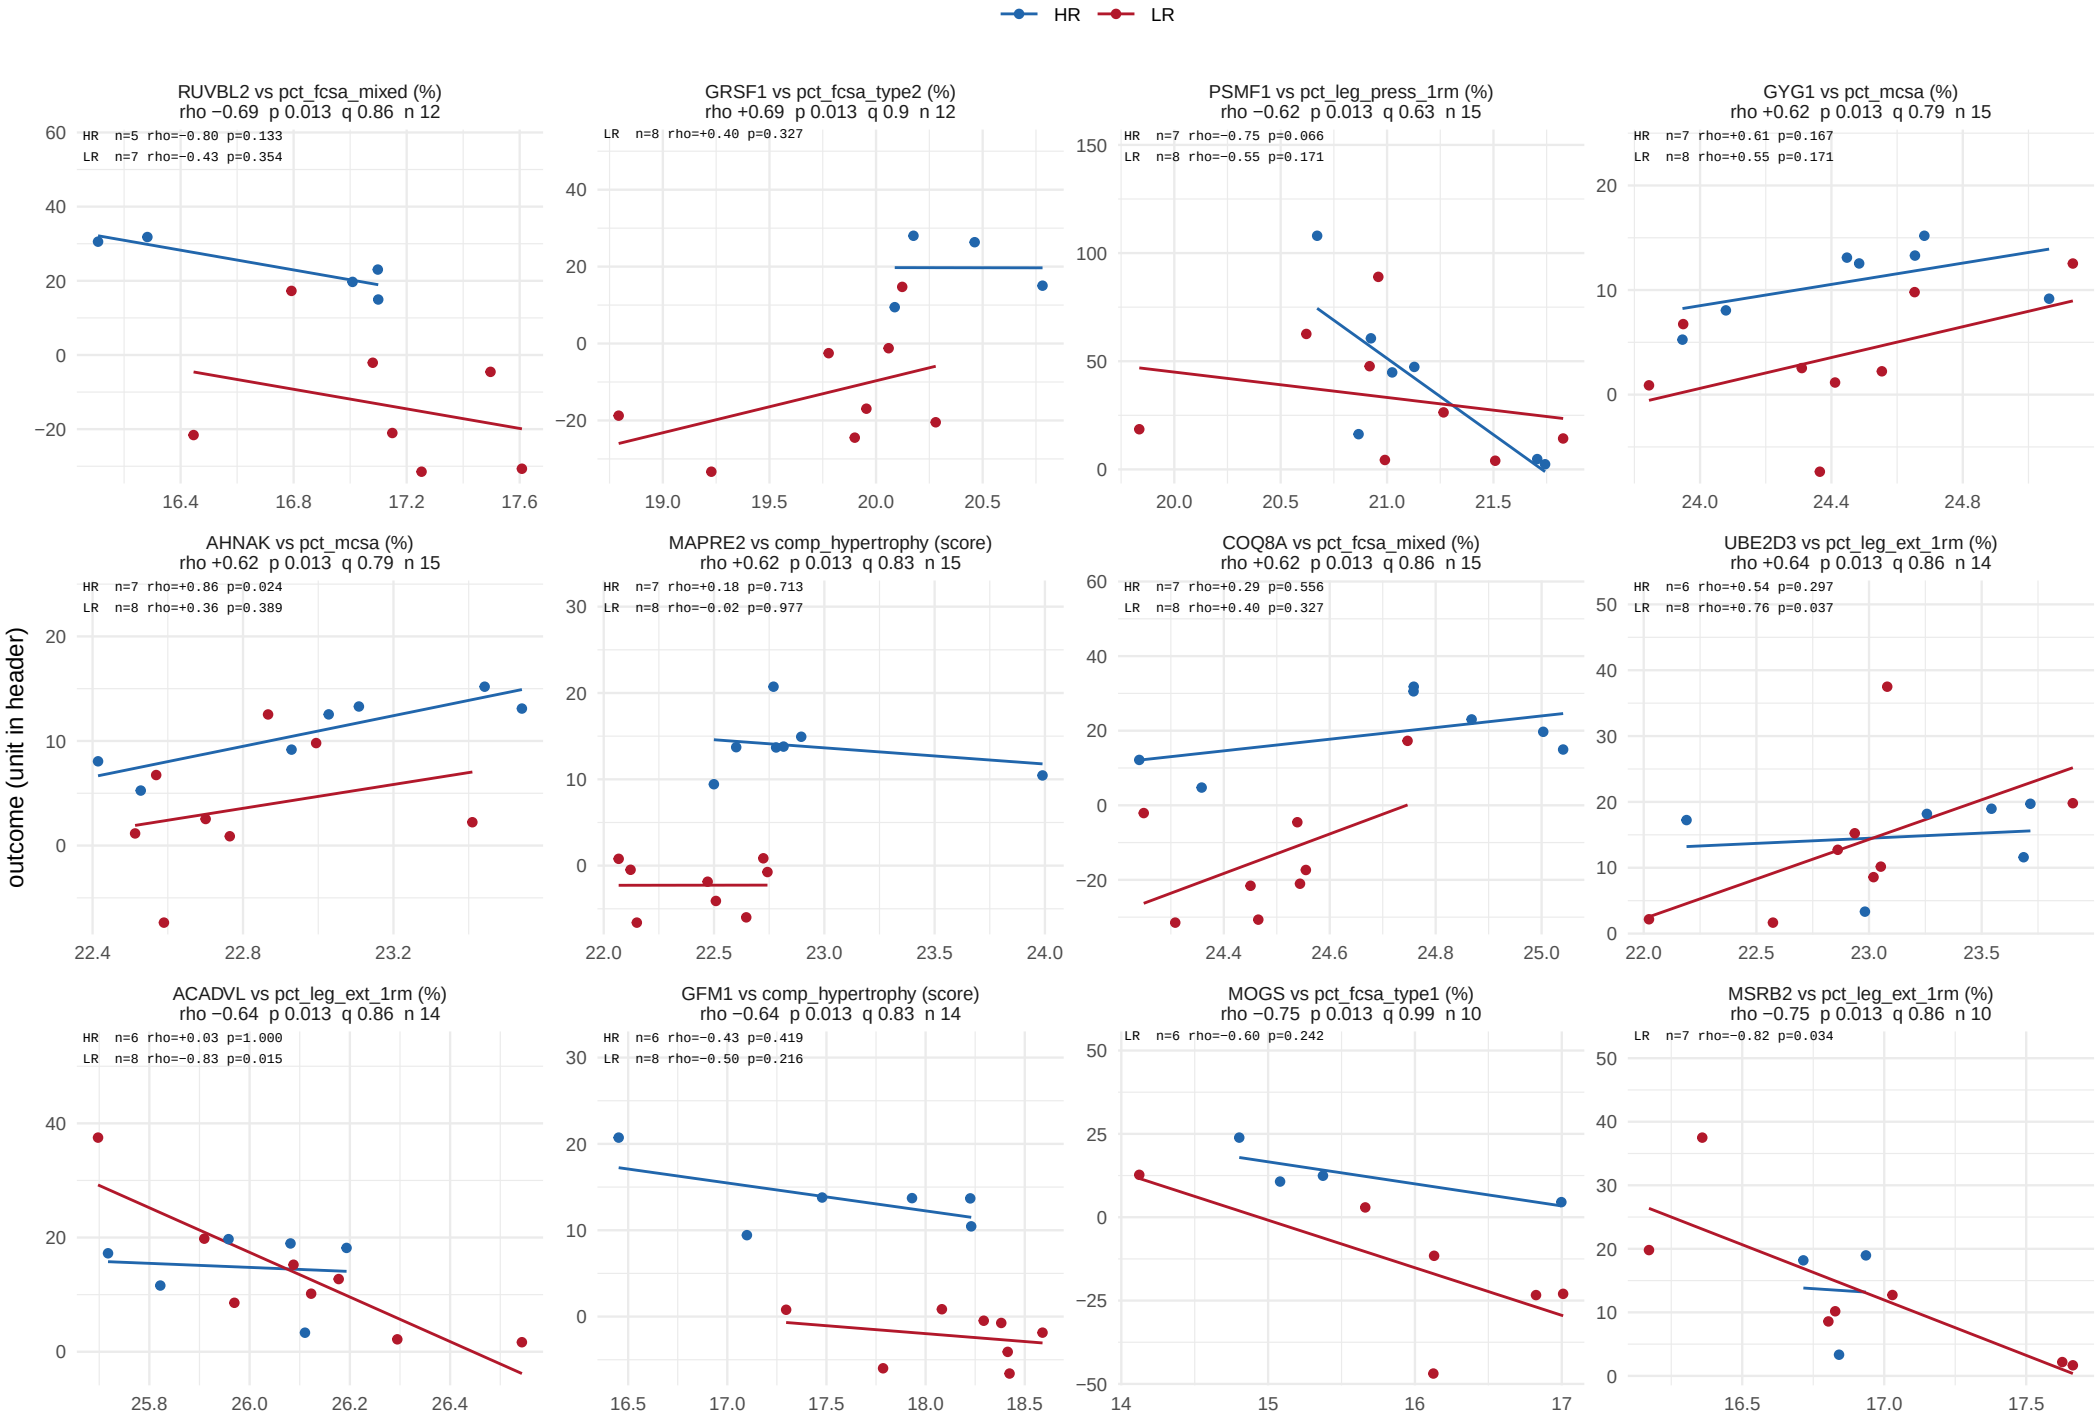

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


654 of 12553 feature−outcome pairs at p < 0.05, 8 at BH < 0.05. Page 15 of 55.

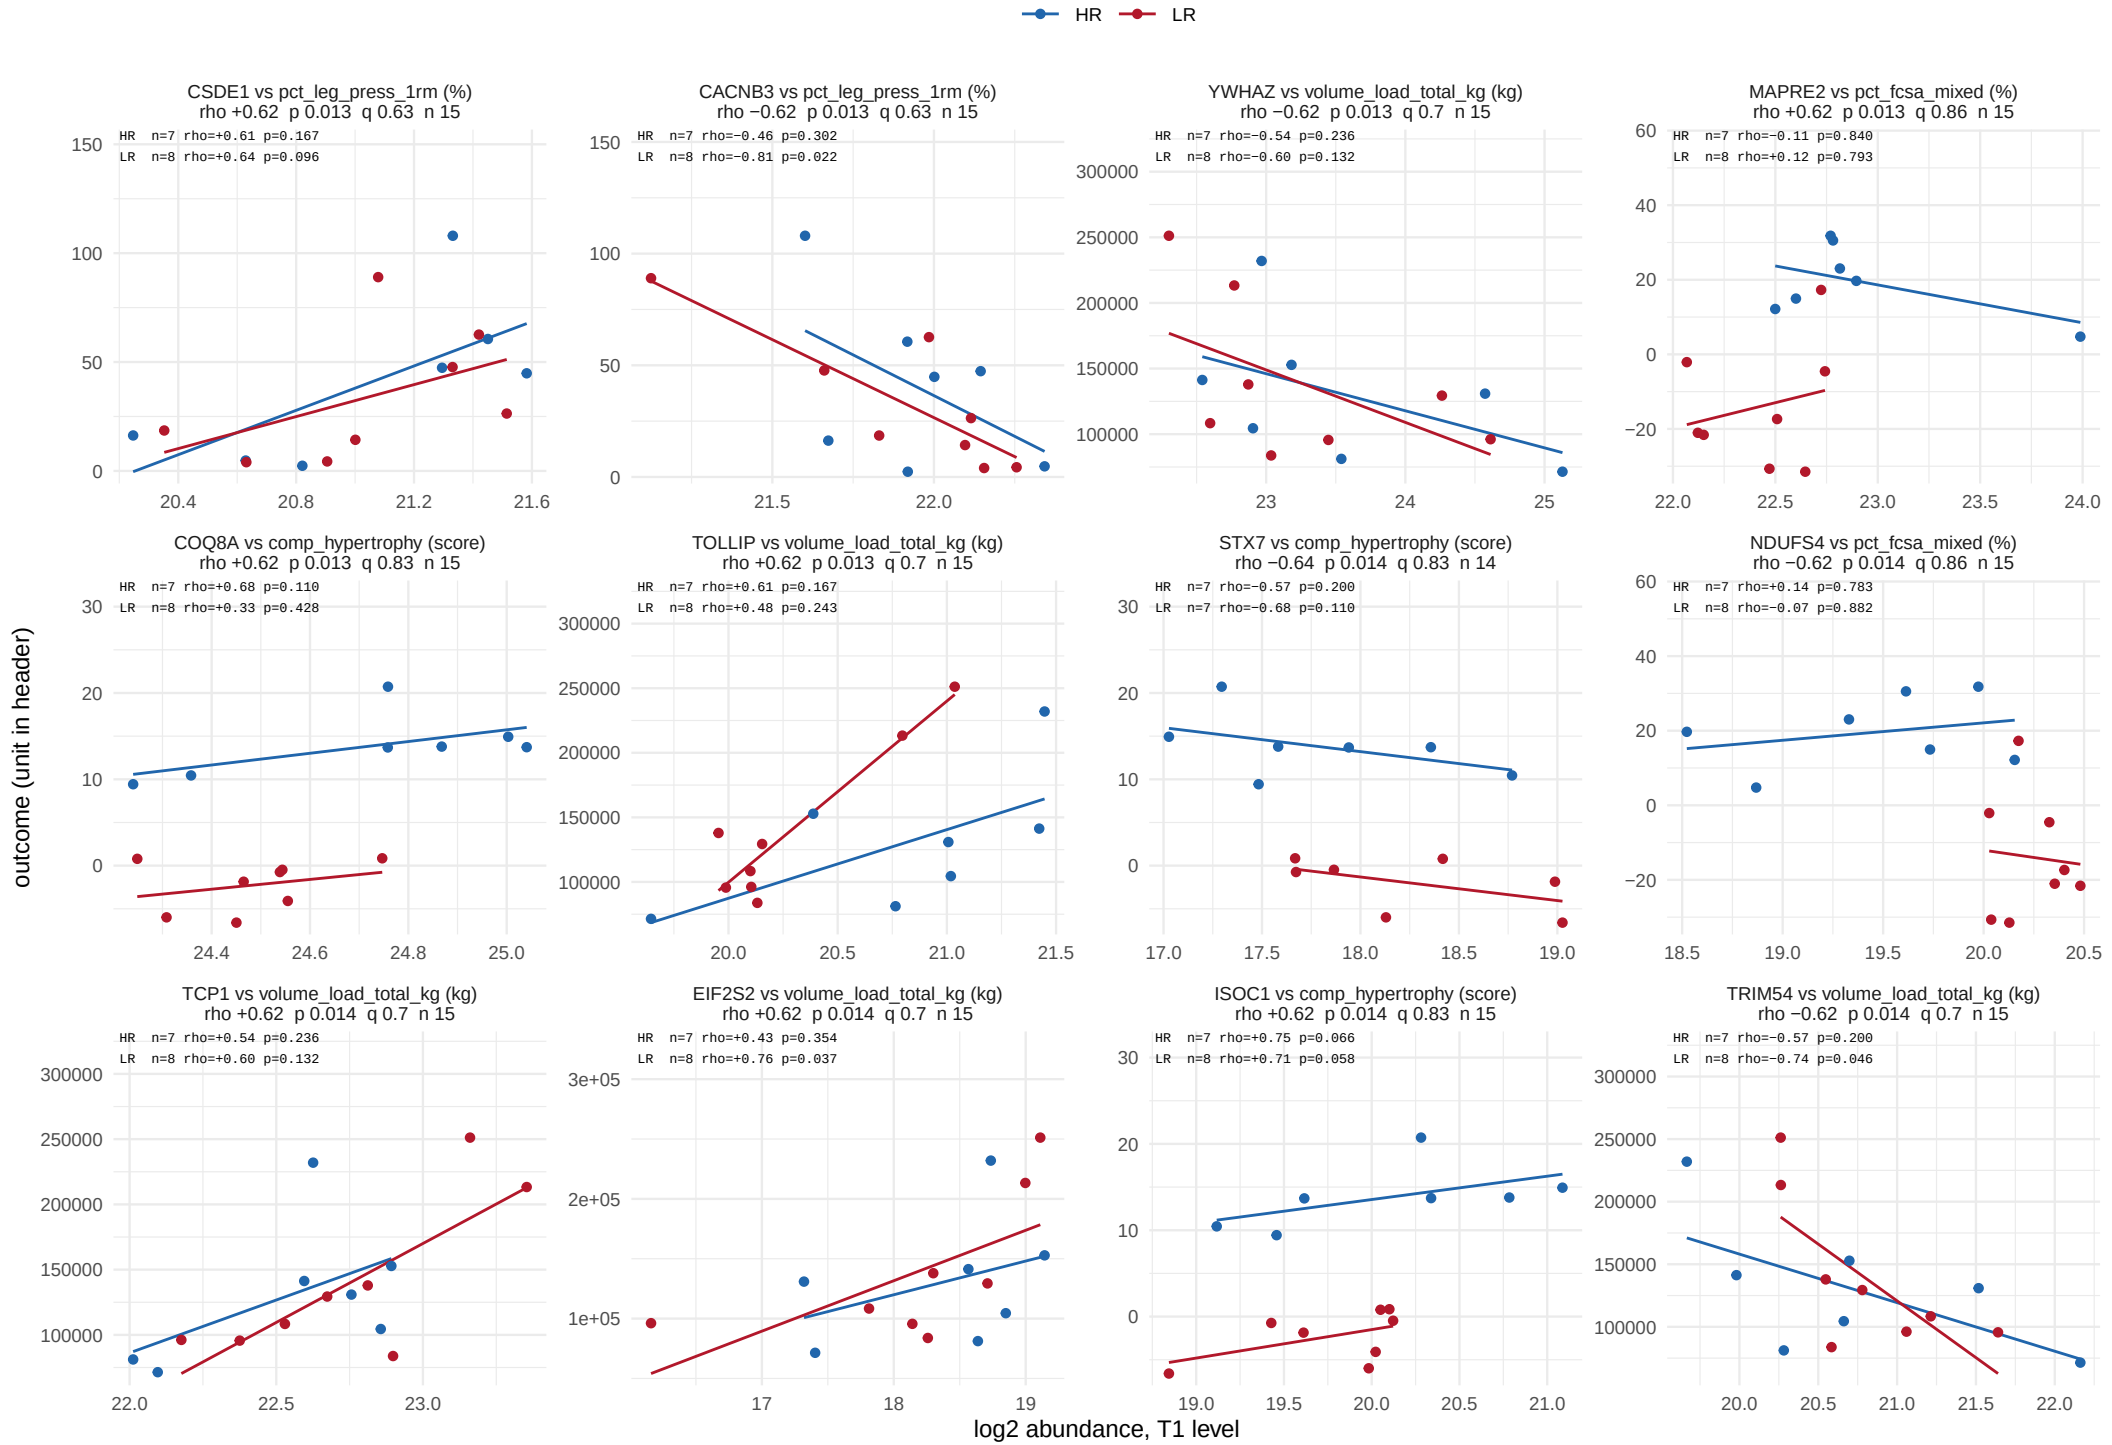

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


654 of 12553 feature−outcome pairs at p < 0.05, 8 at BH < 0.05. Page 16 of 55.

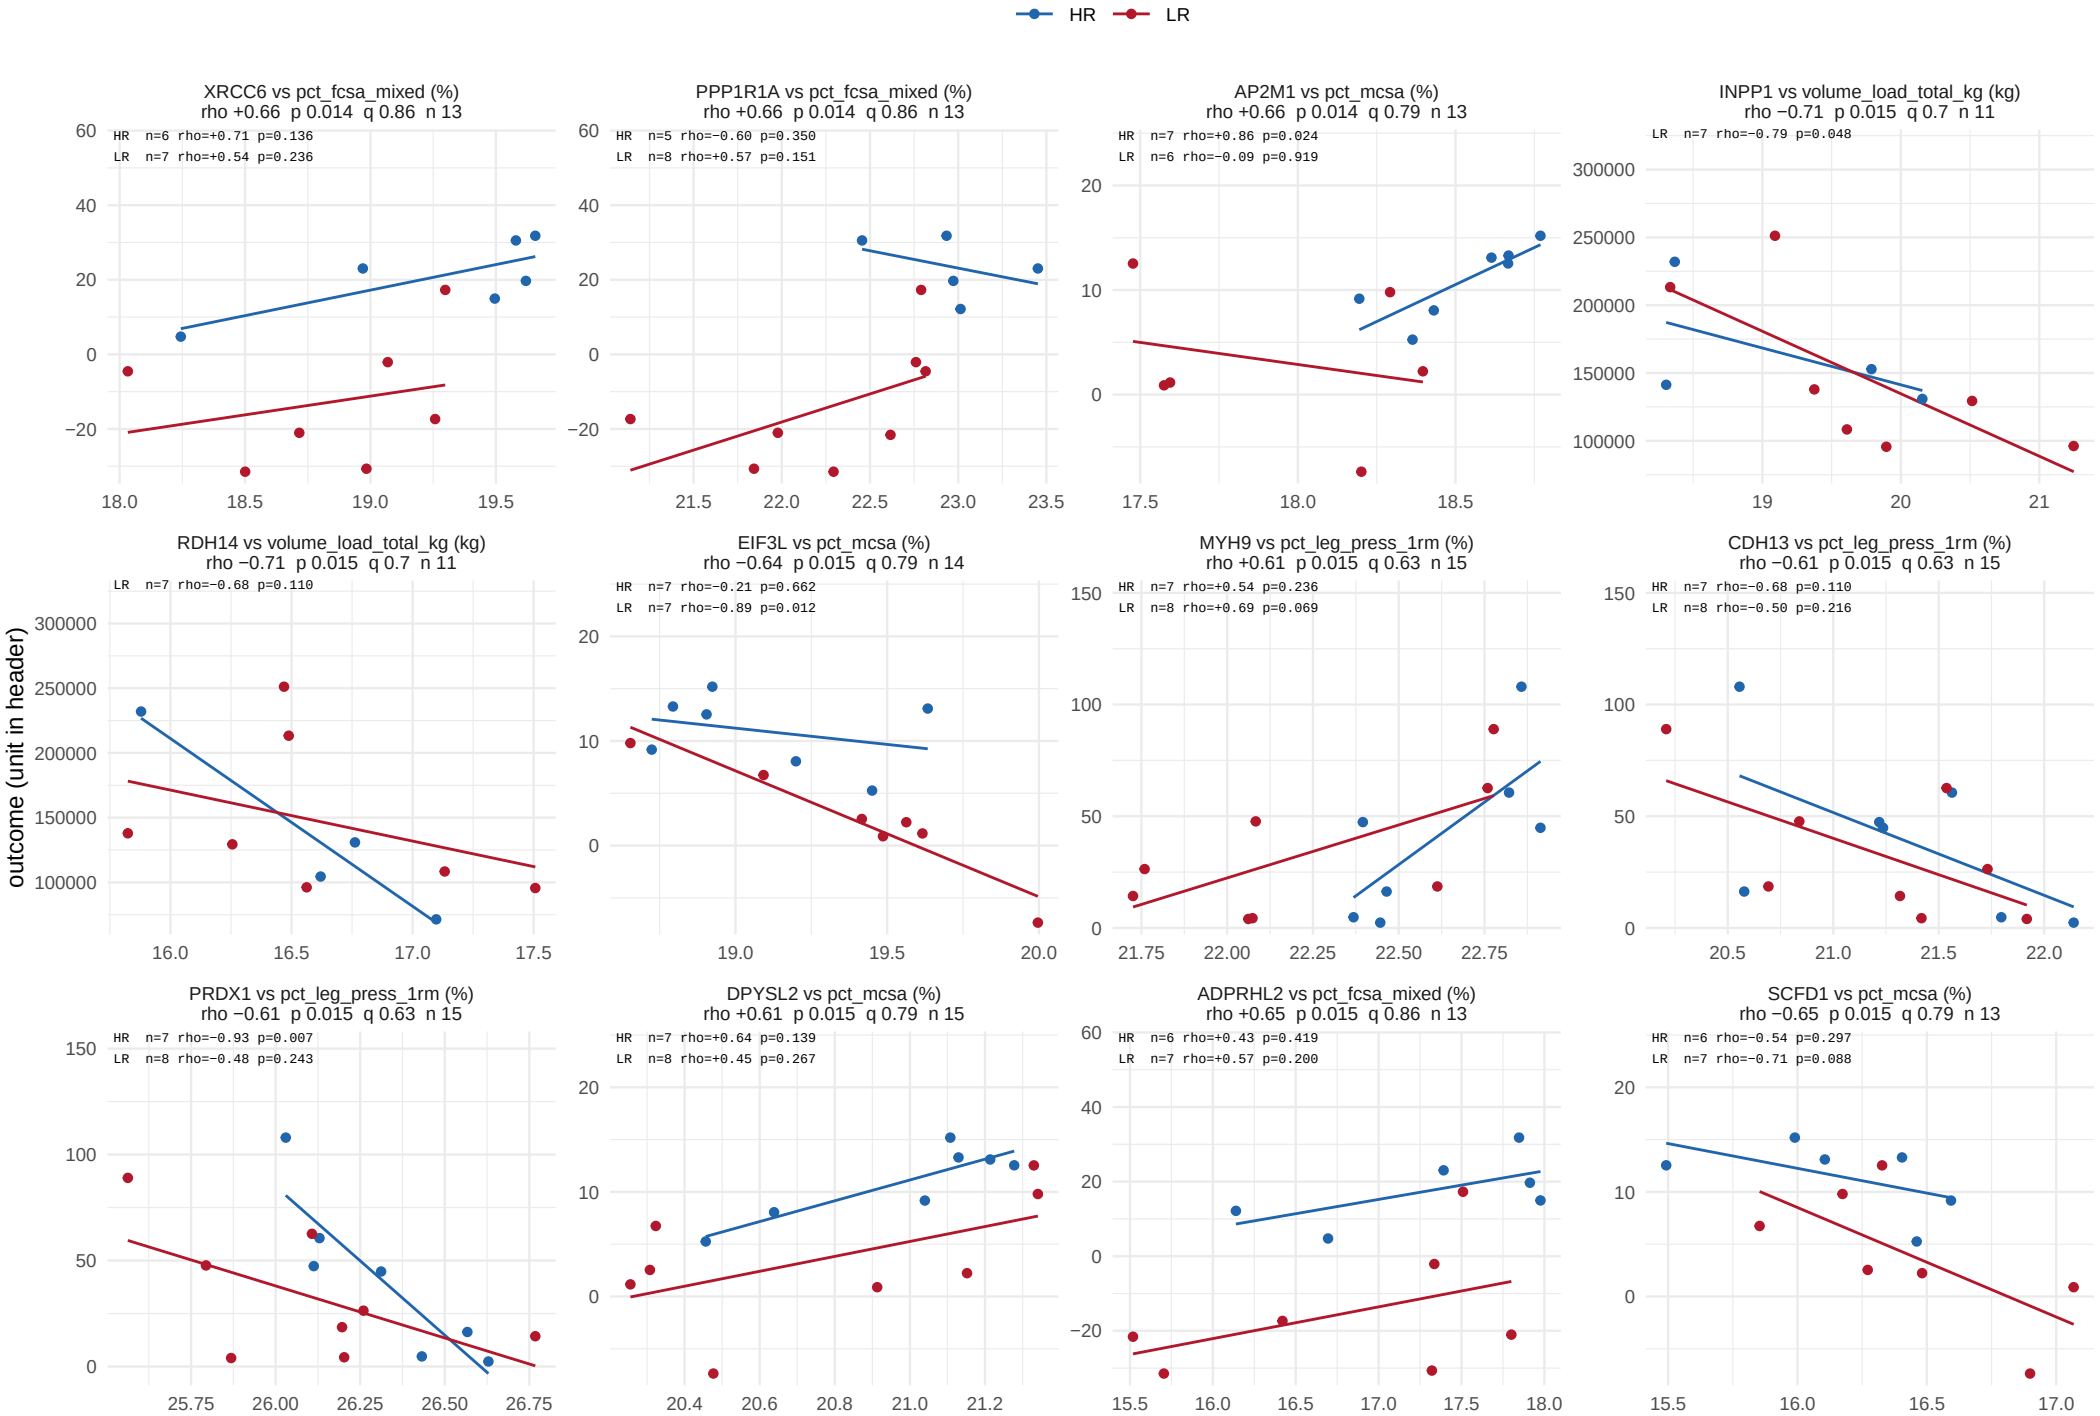

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


654 of 12553 feature−outcome pairs at p < 0.05, 8 at BH < 0.05. Page 17 of 55.

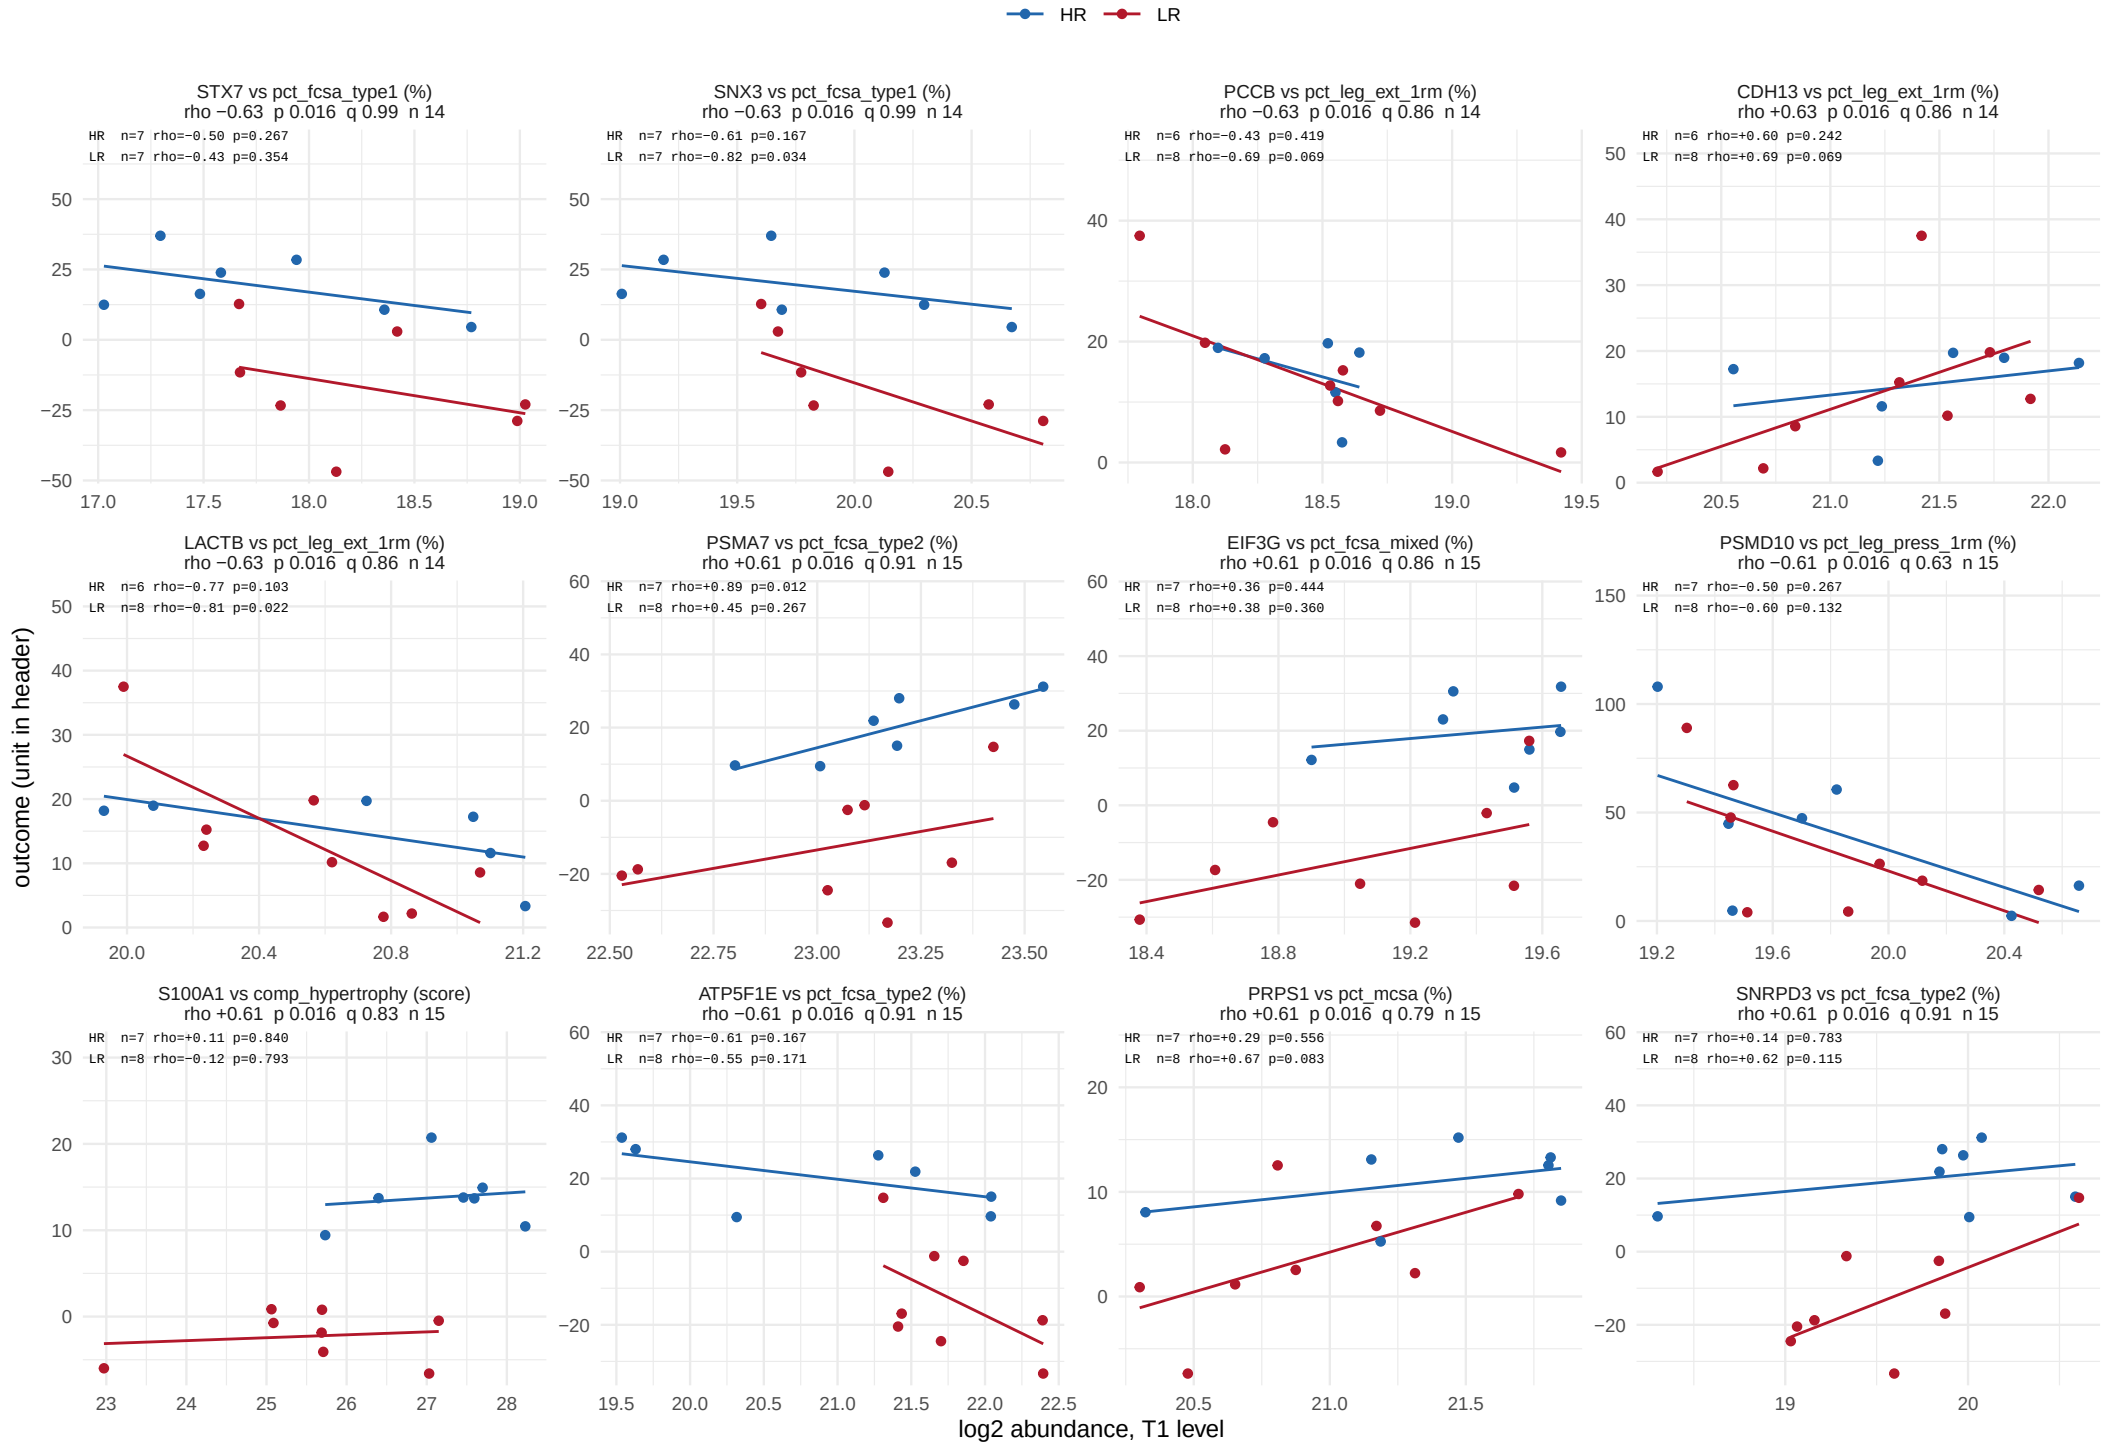

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


654 of 12553 feature−outcome pairs at p < 0.05, 8 at BH < 0.05. Page 18 of 55.

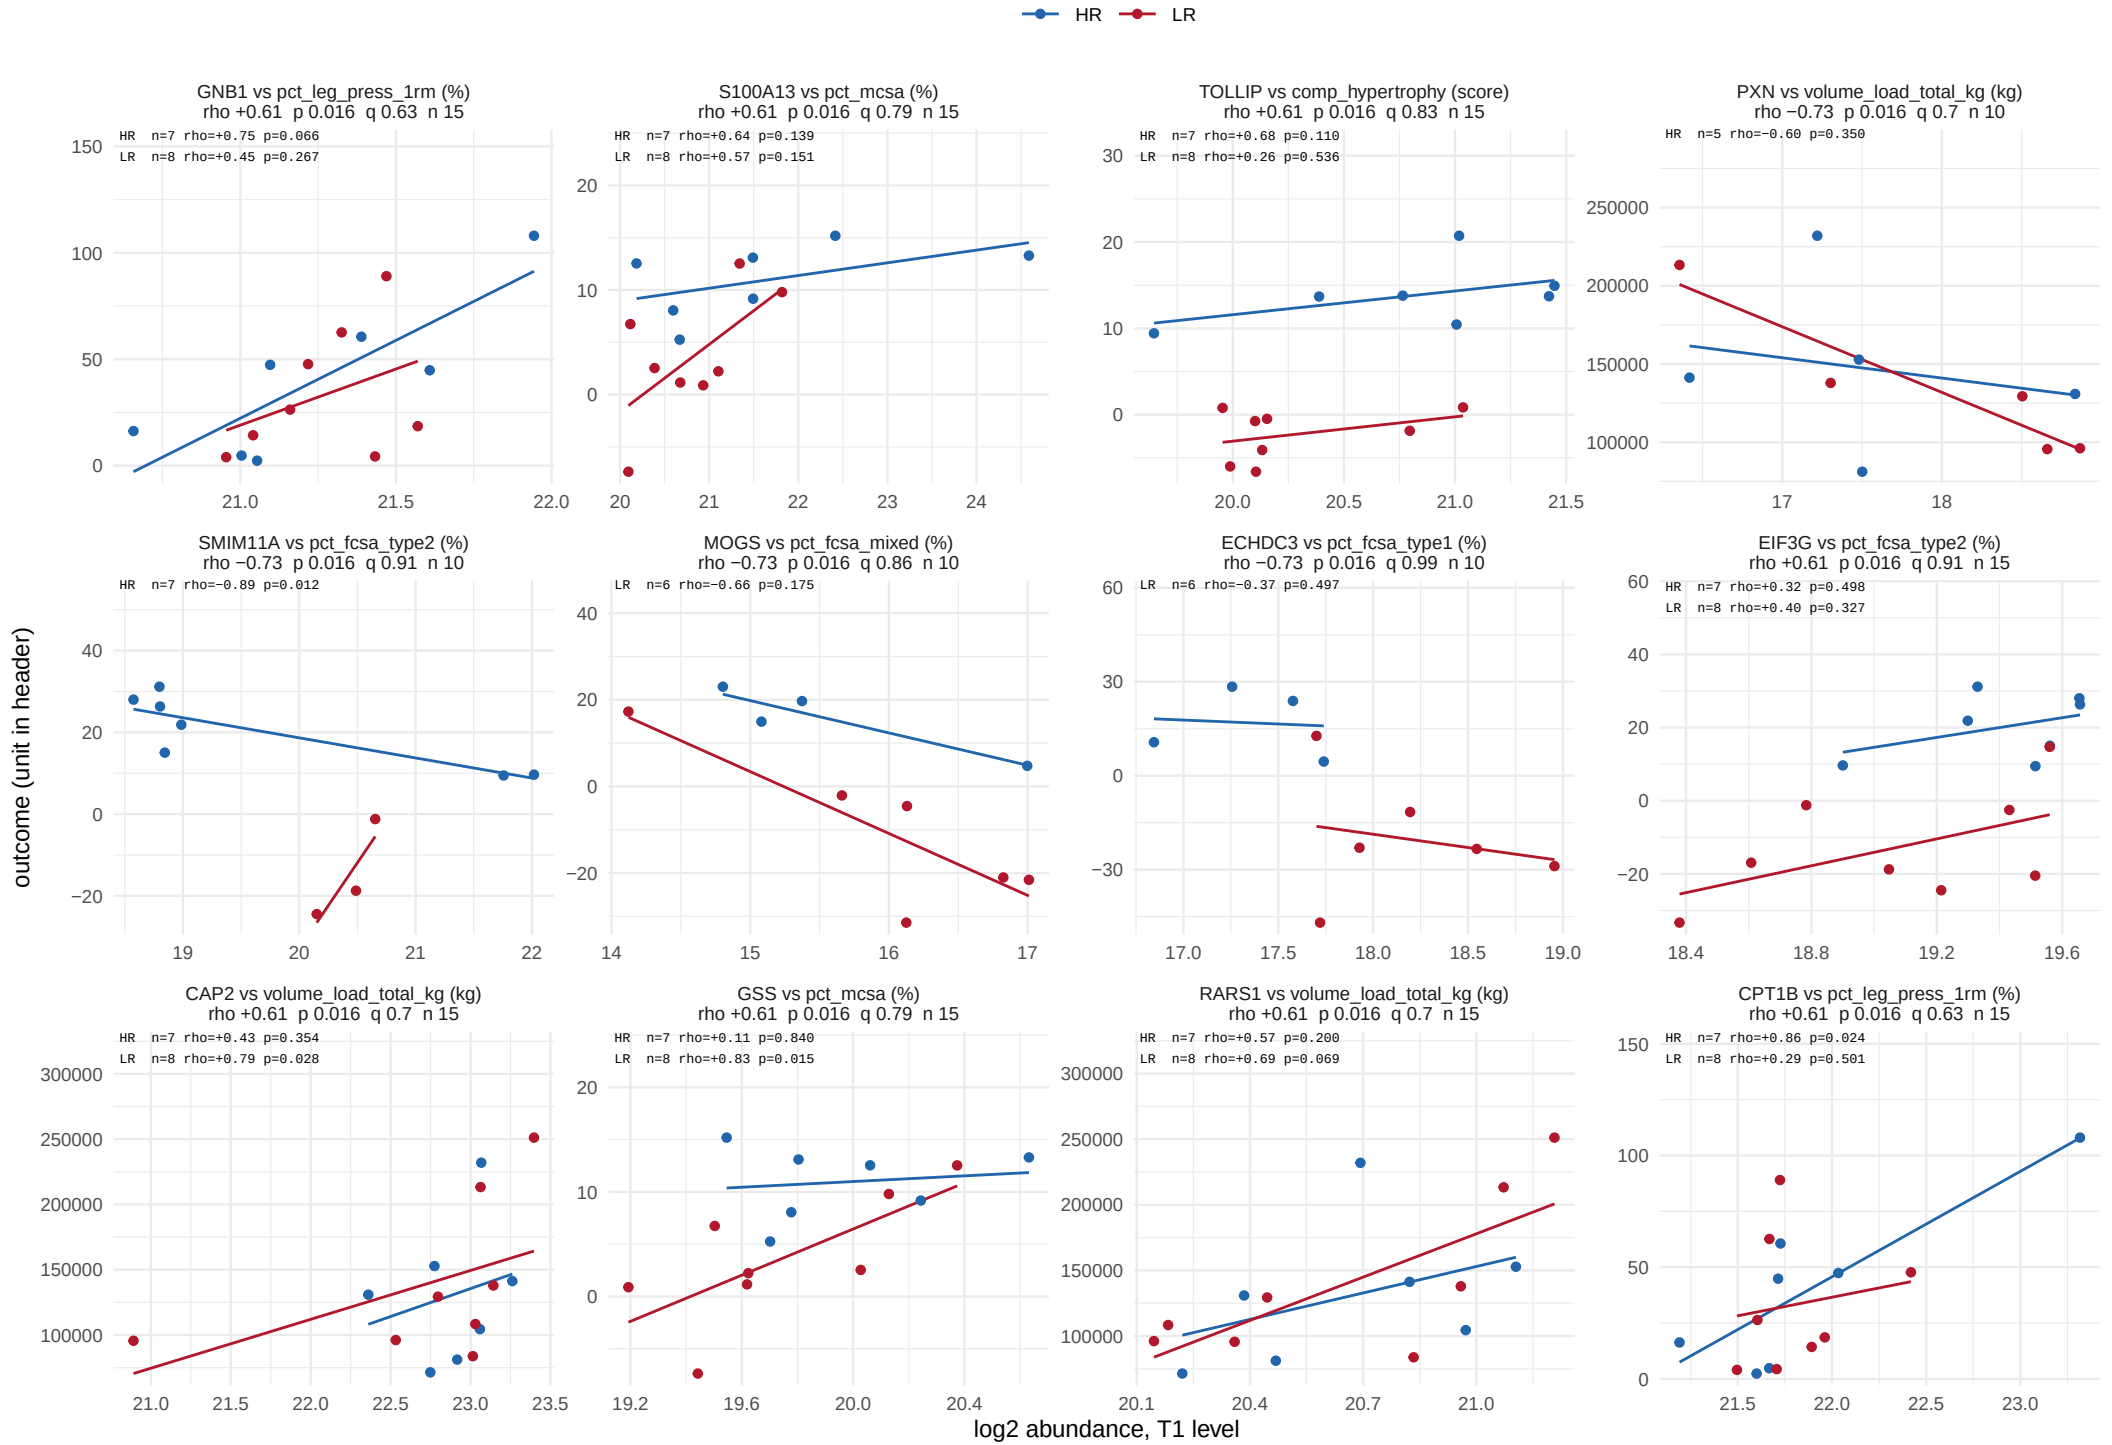

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


654 of 12553 feature−outcome pairs at p < 0.05, 8 at BH < 0.05. Page 19 of 55.

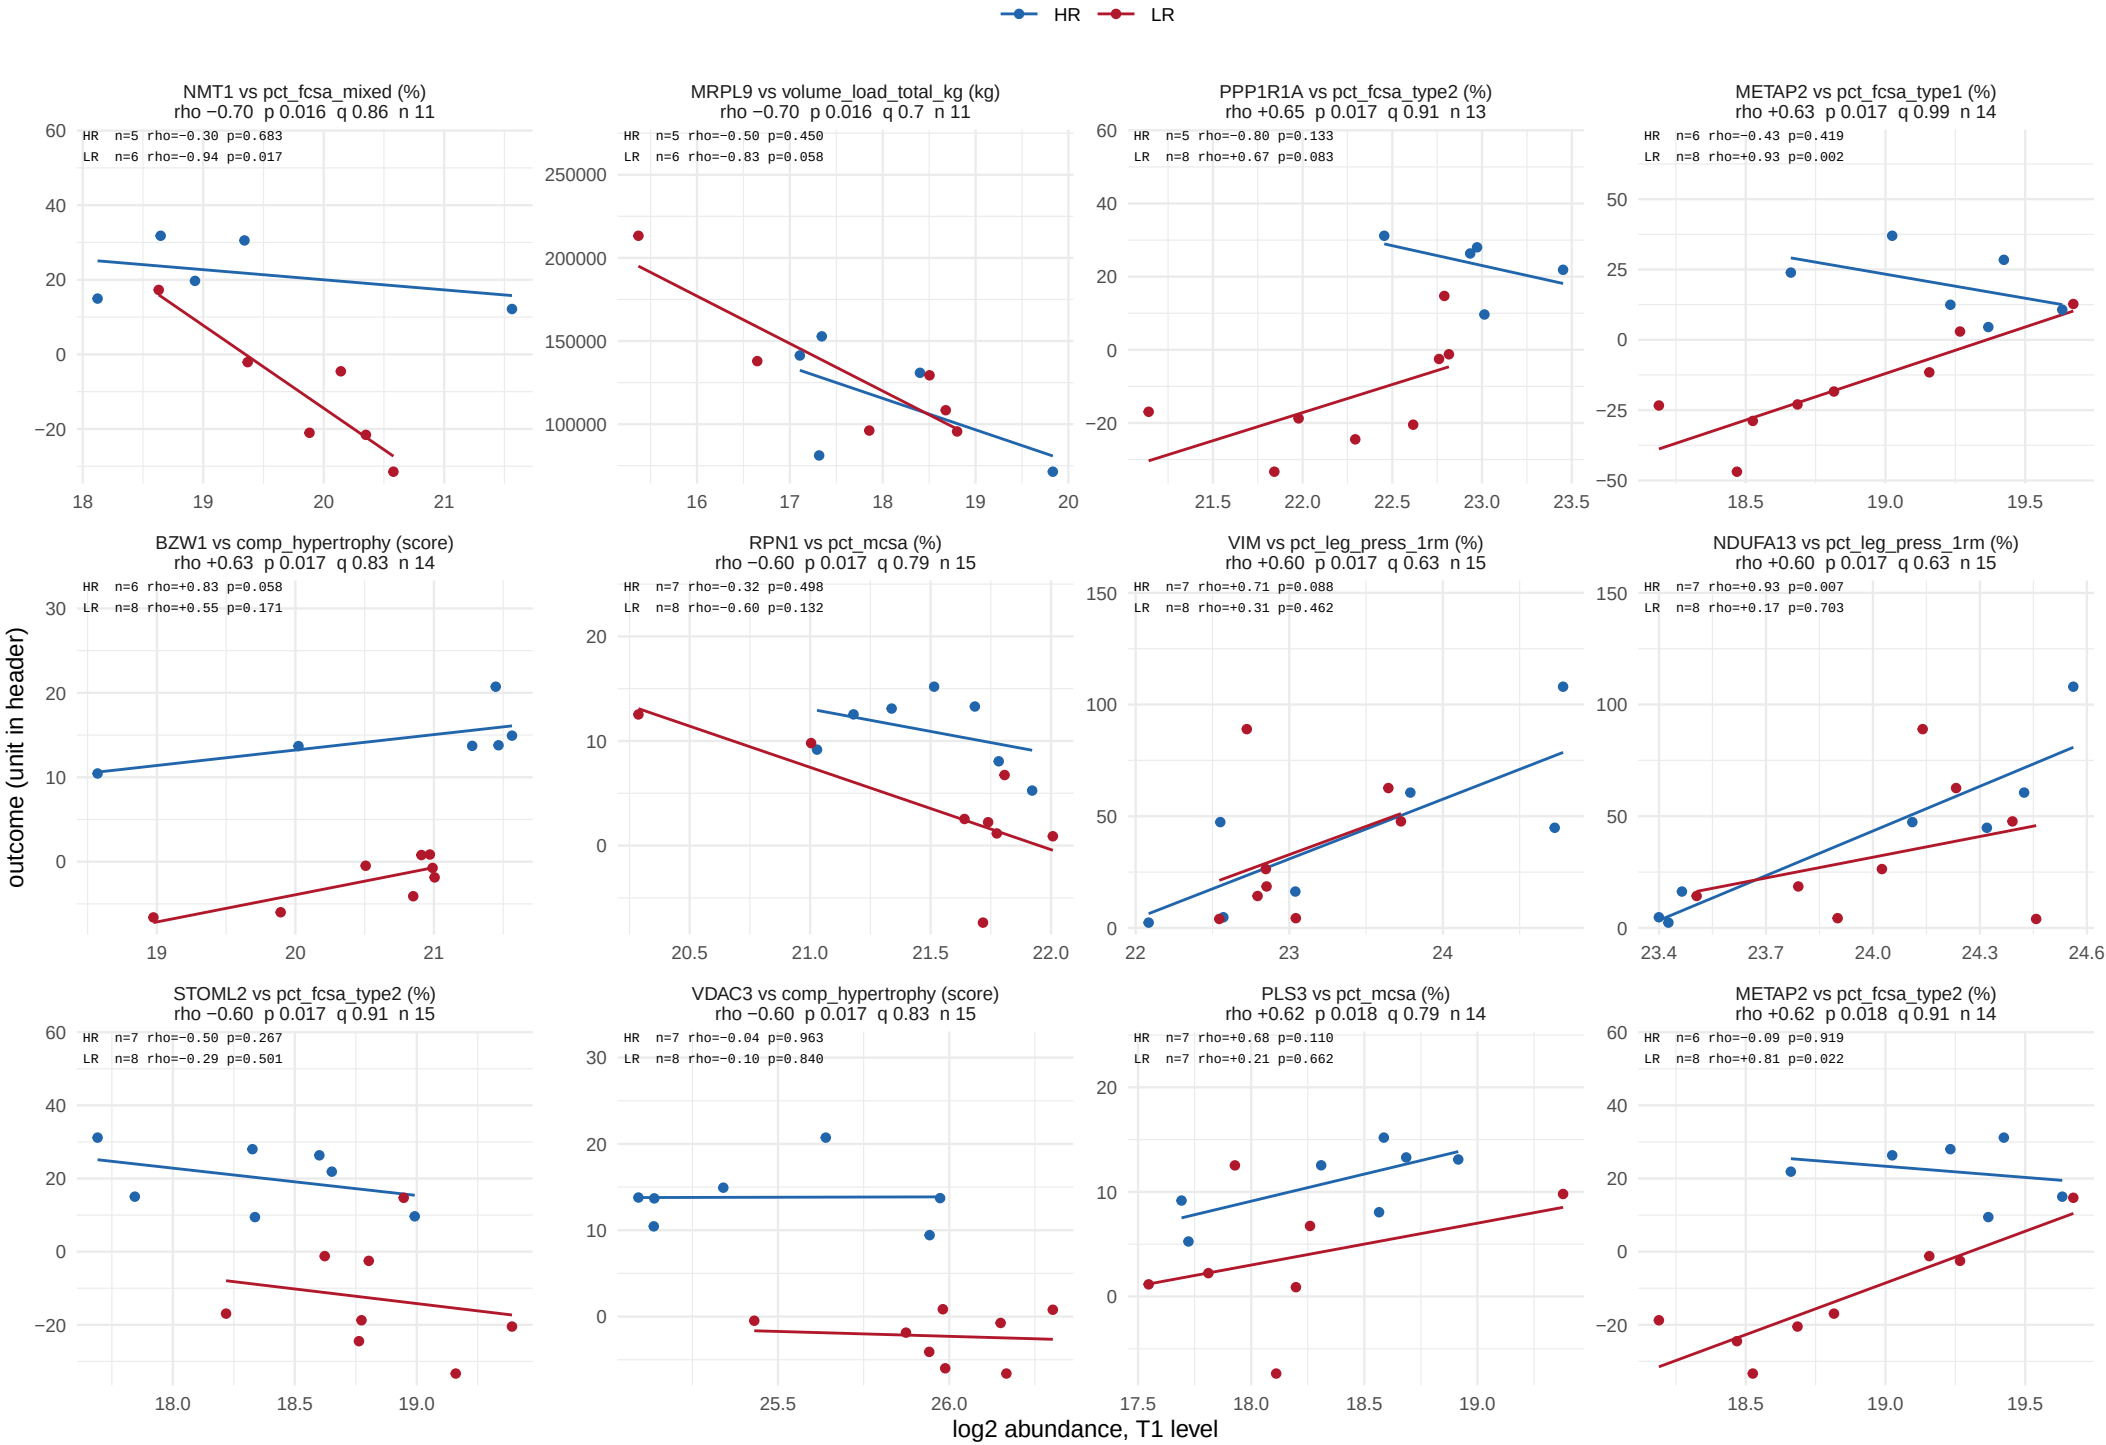

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


654 of 12553 feature−outcome pairs at p < 0.05, 8 at BH < 0.05. Page 20 of 55.

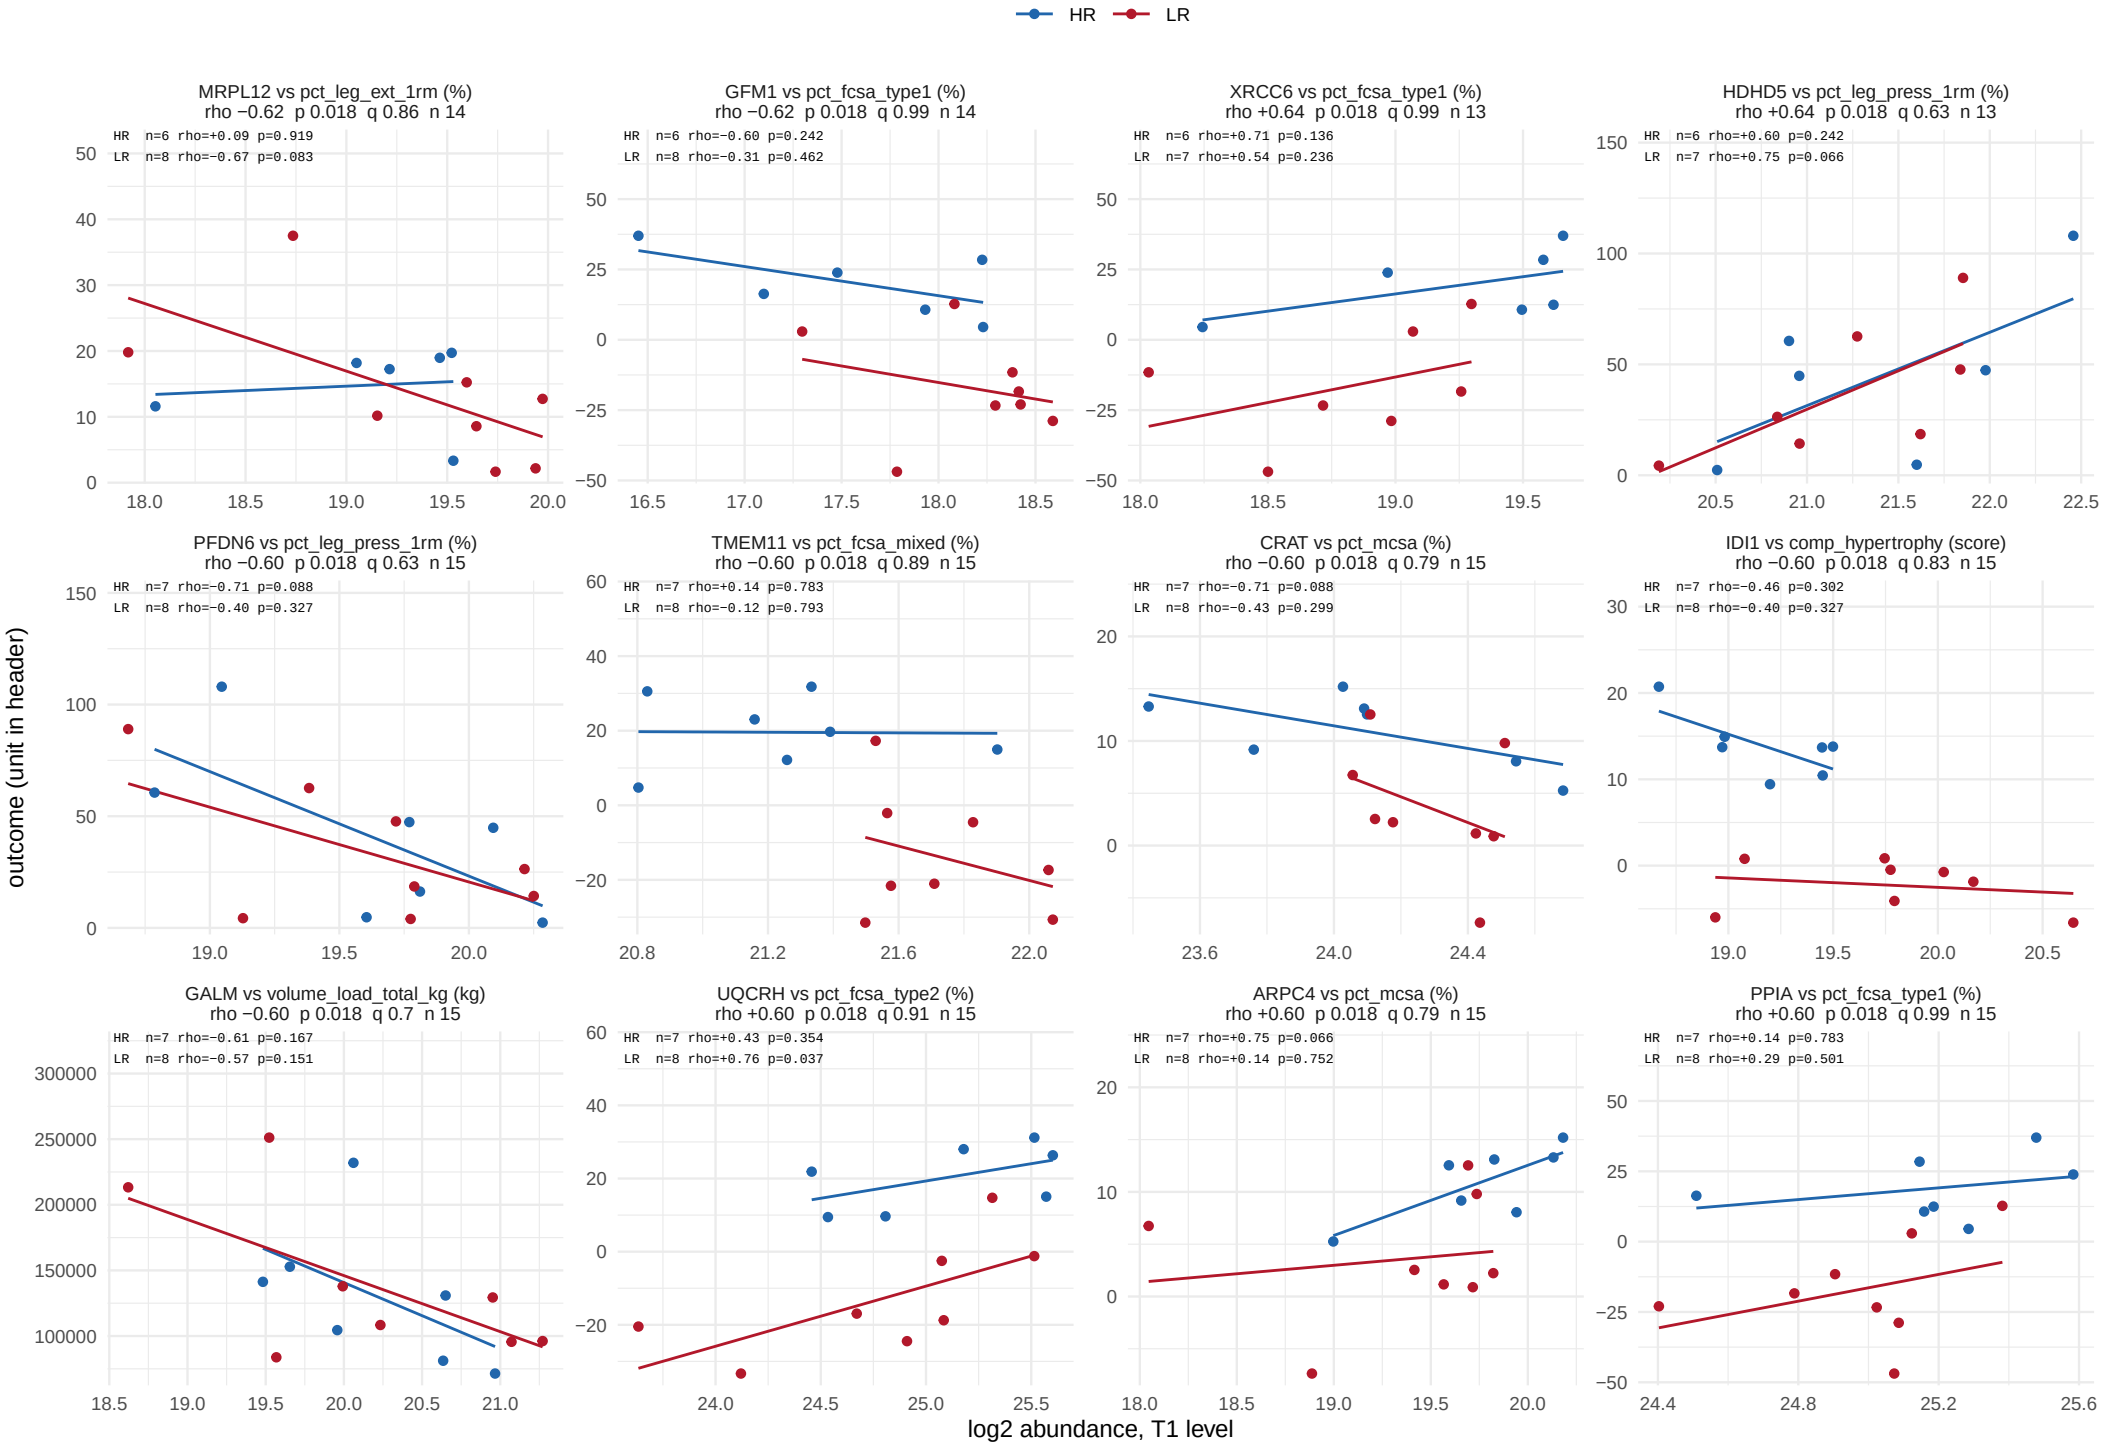

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


654 of 12553 feature−outcome pairs at p < 0.05, 8 at BH < 0.05. Page 21 of 55.

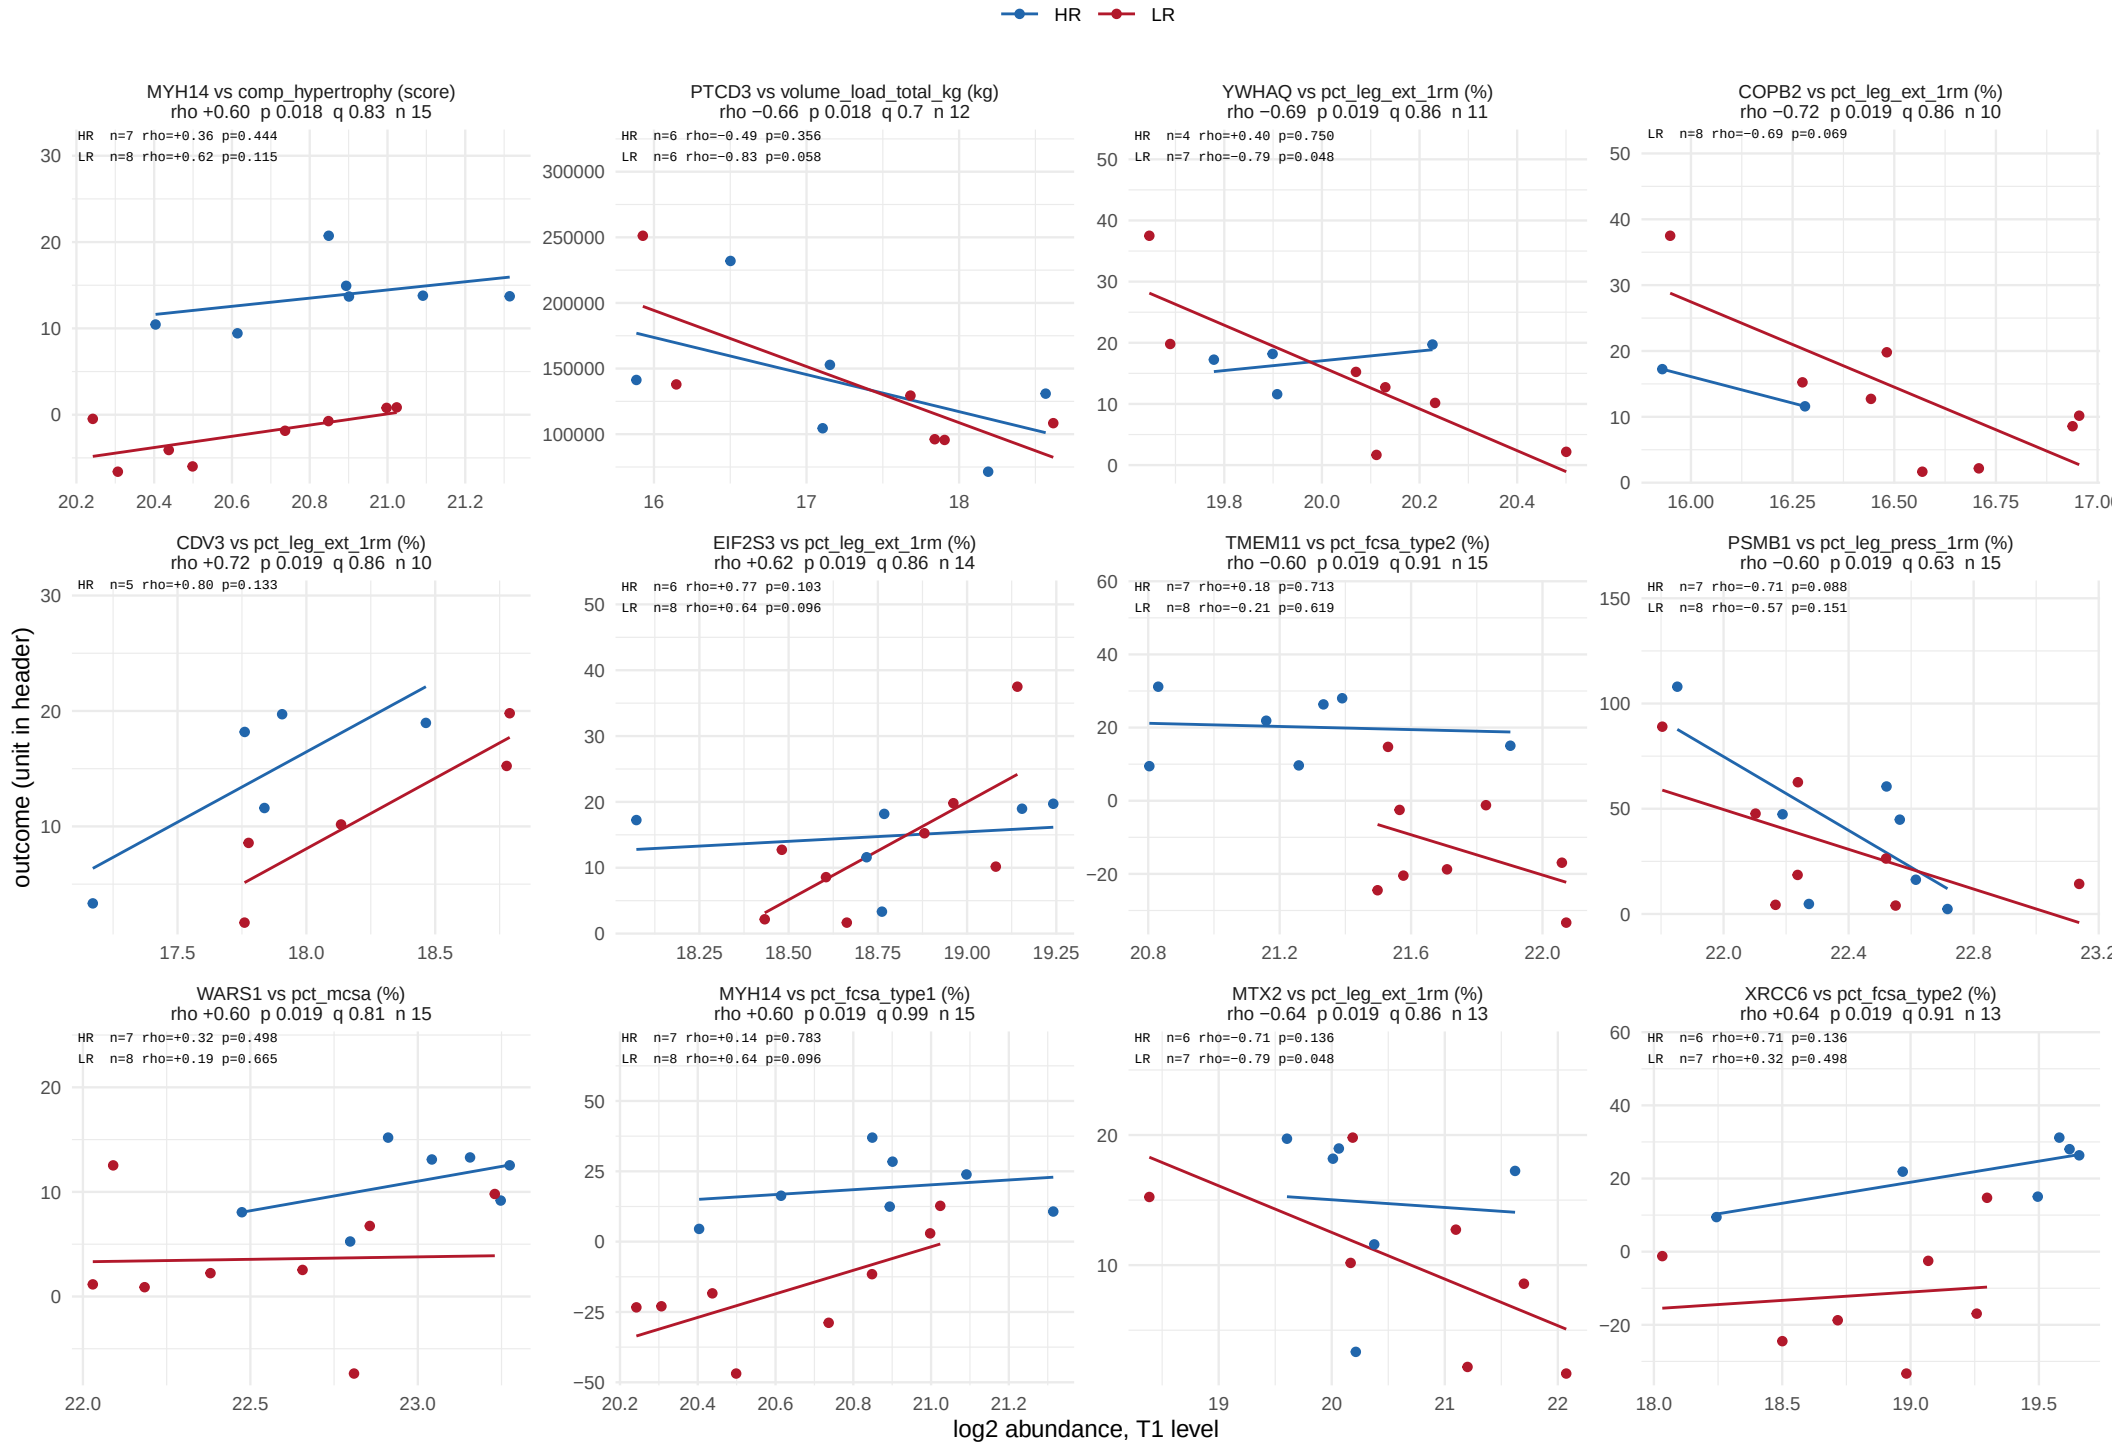

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


654 of 12553 feature−outcome pairs at p < 0.05, 8 at BH < 0.05. Page 22 of 55.

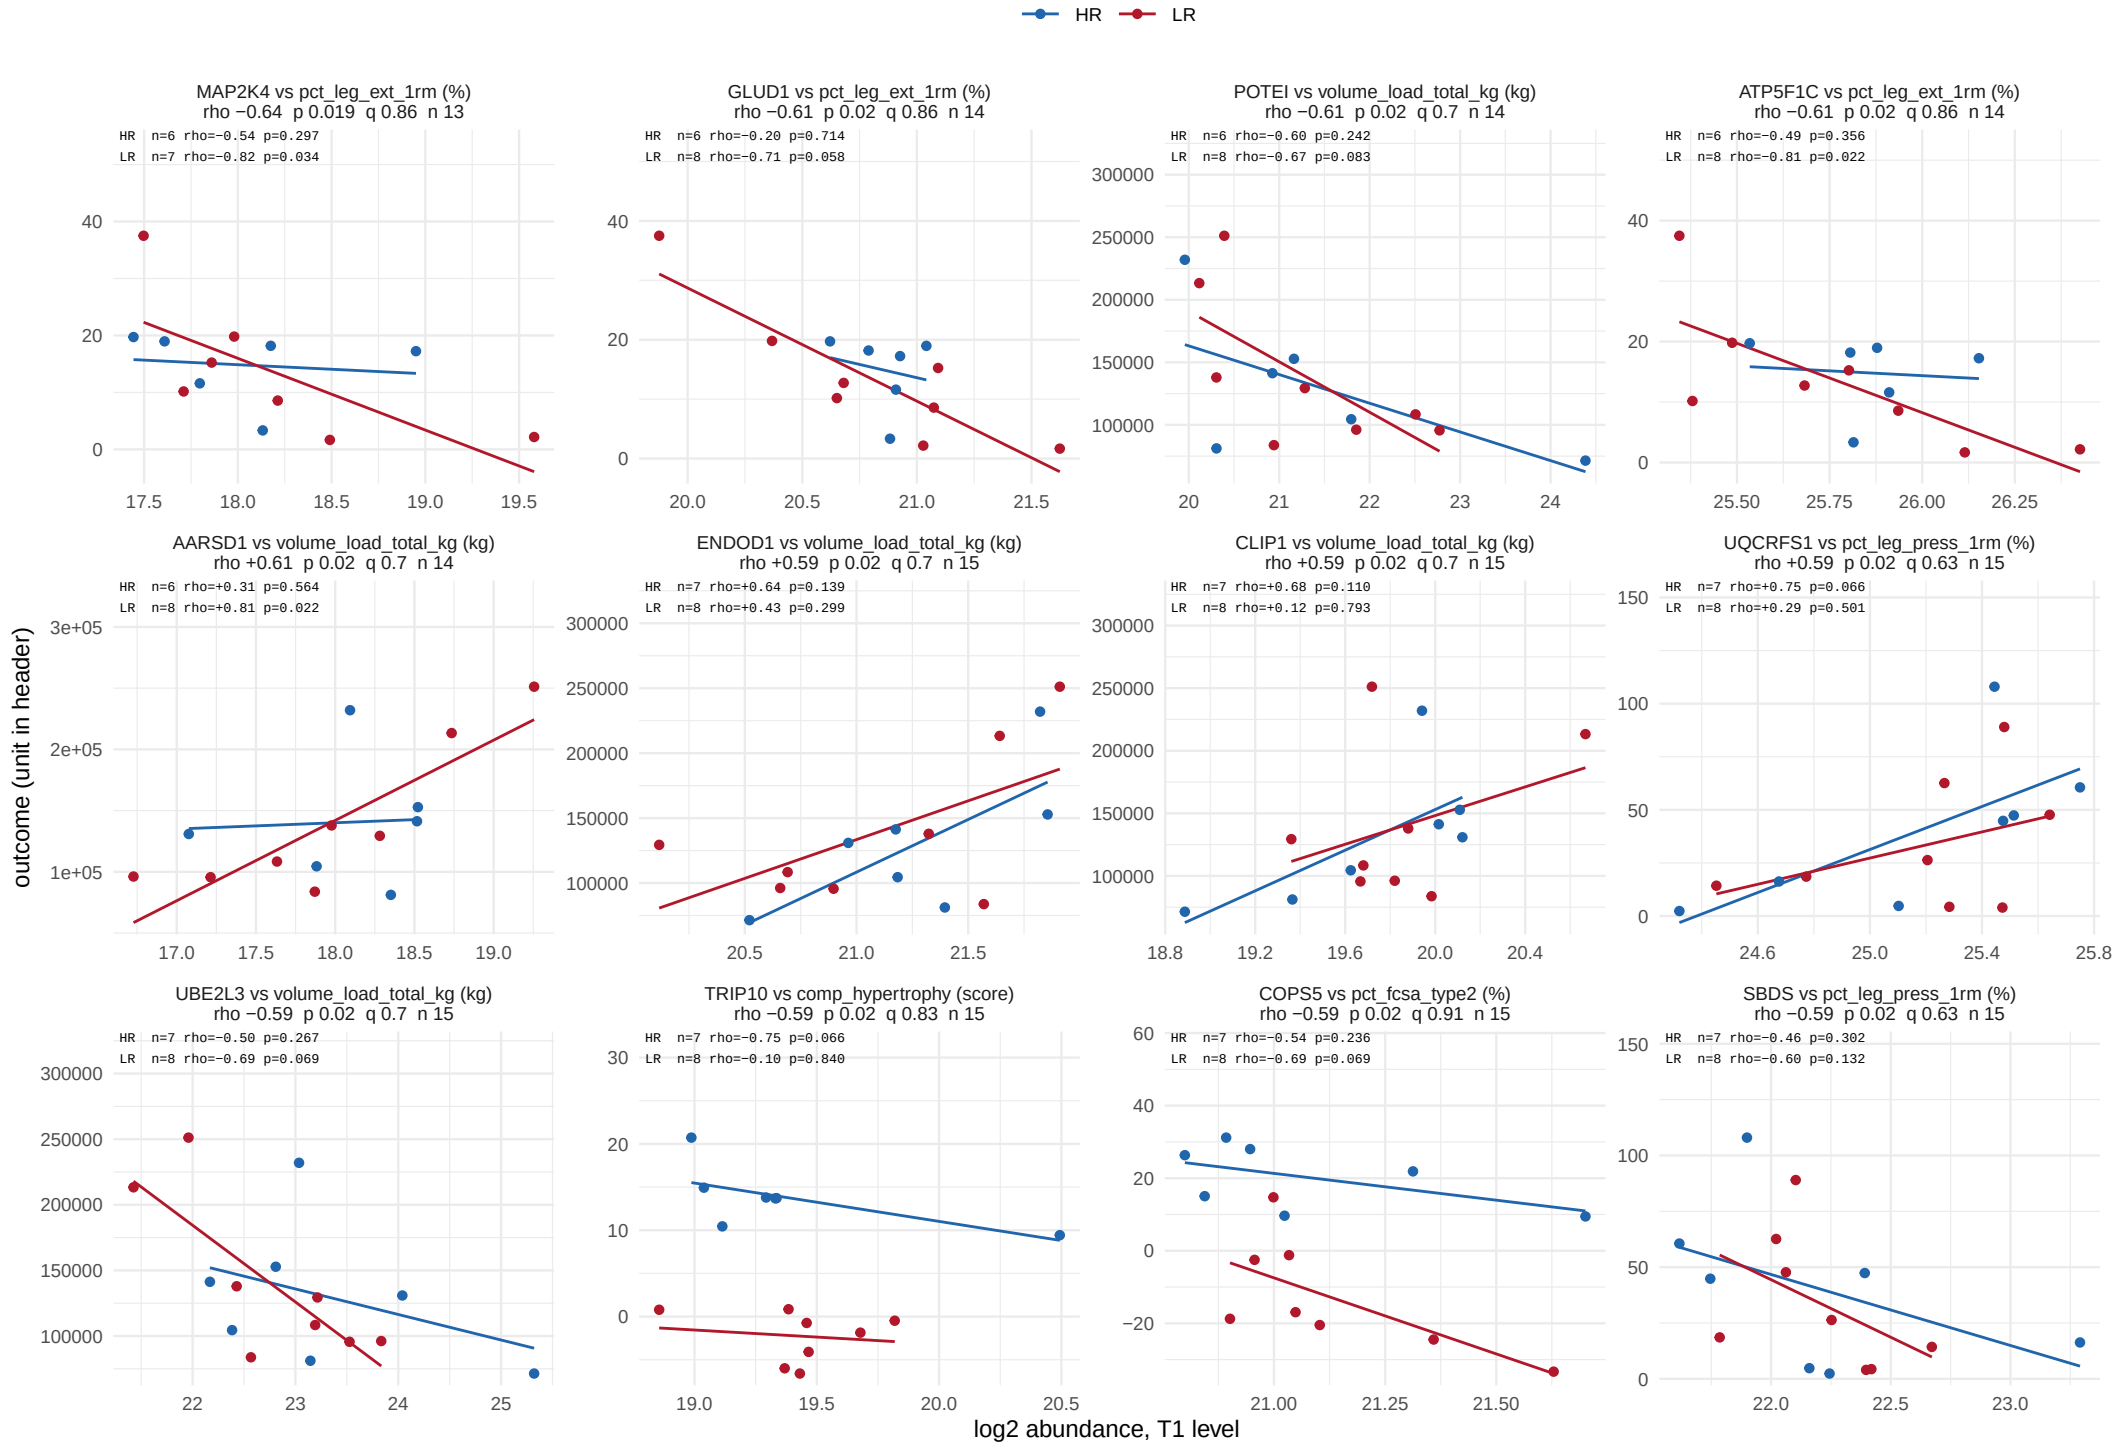

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


654 of 12553 feature−outcome pairs at p < 0.05, 8 at BH < 0.05. Page 23 of 55.

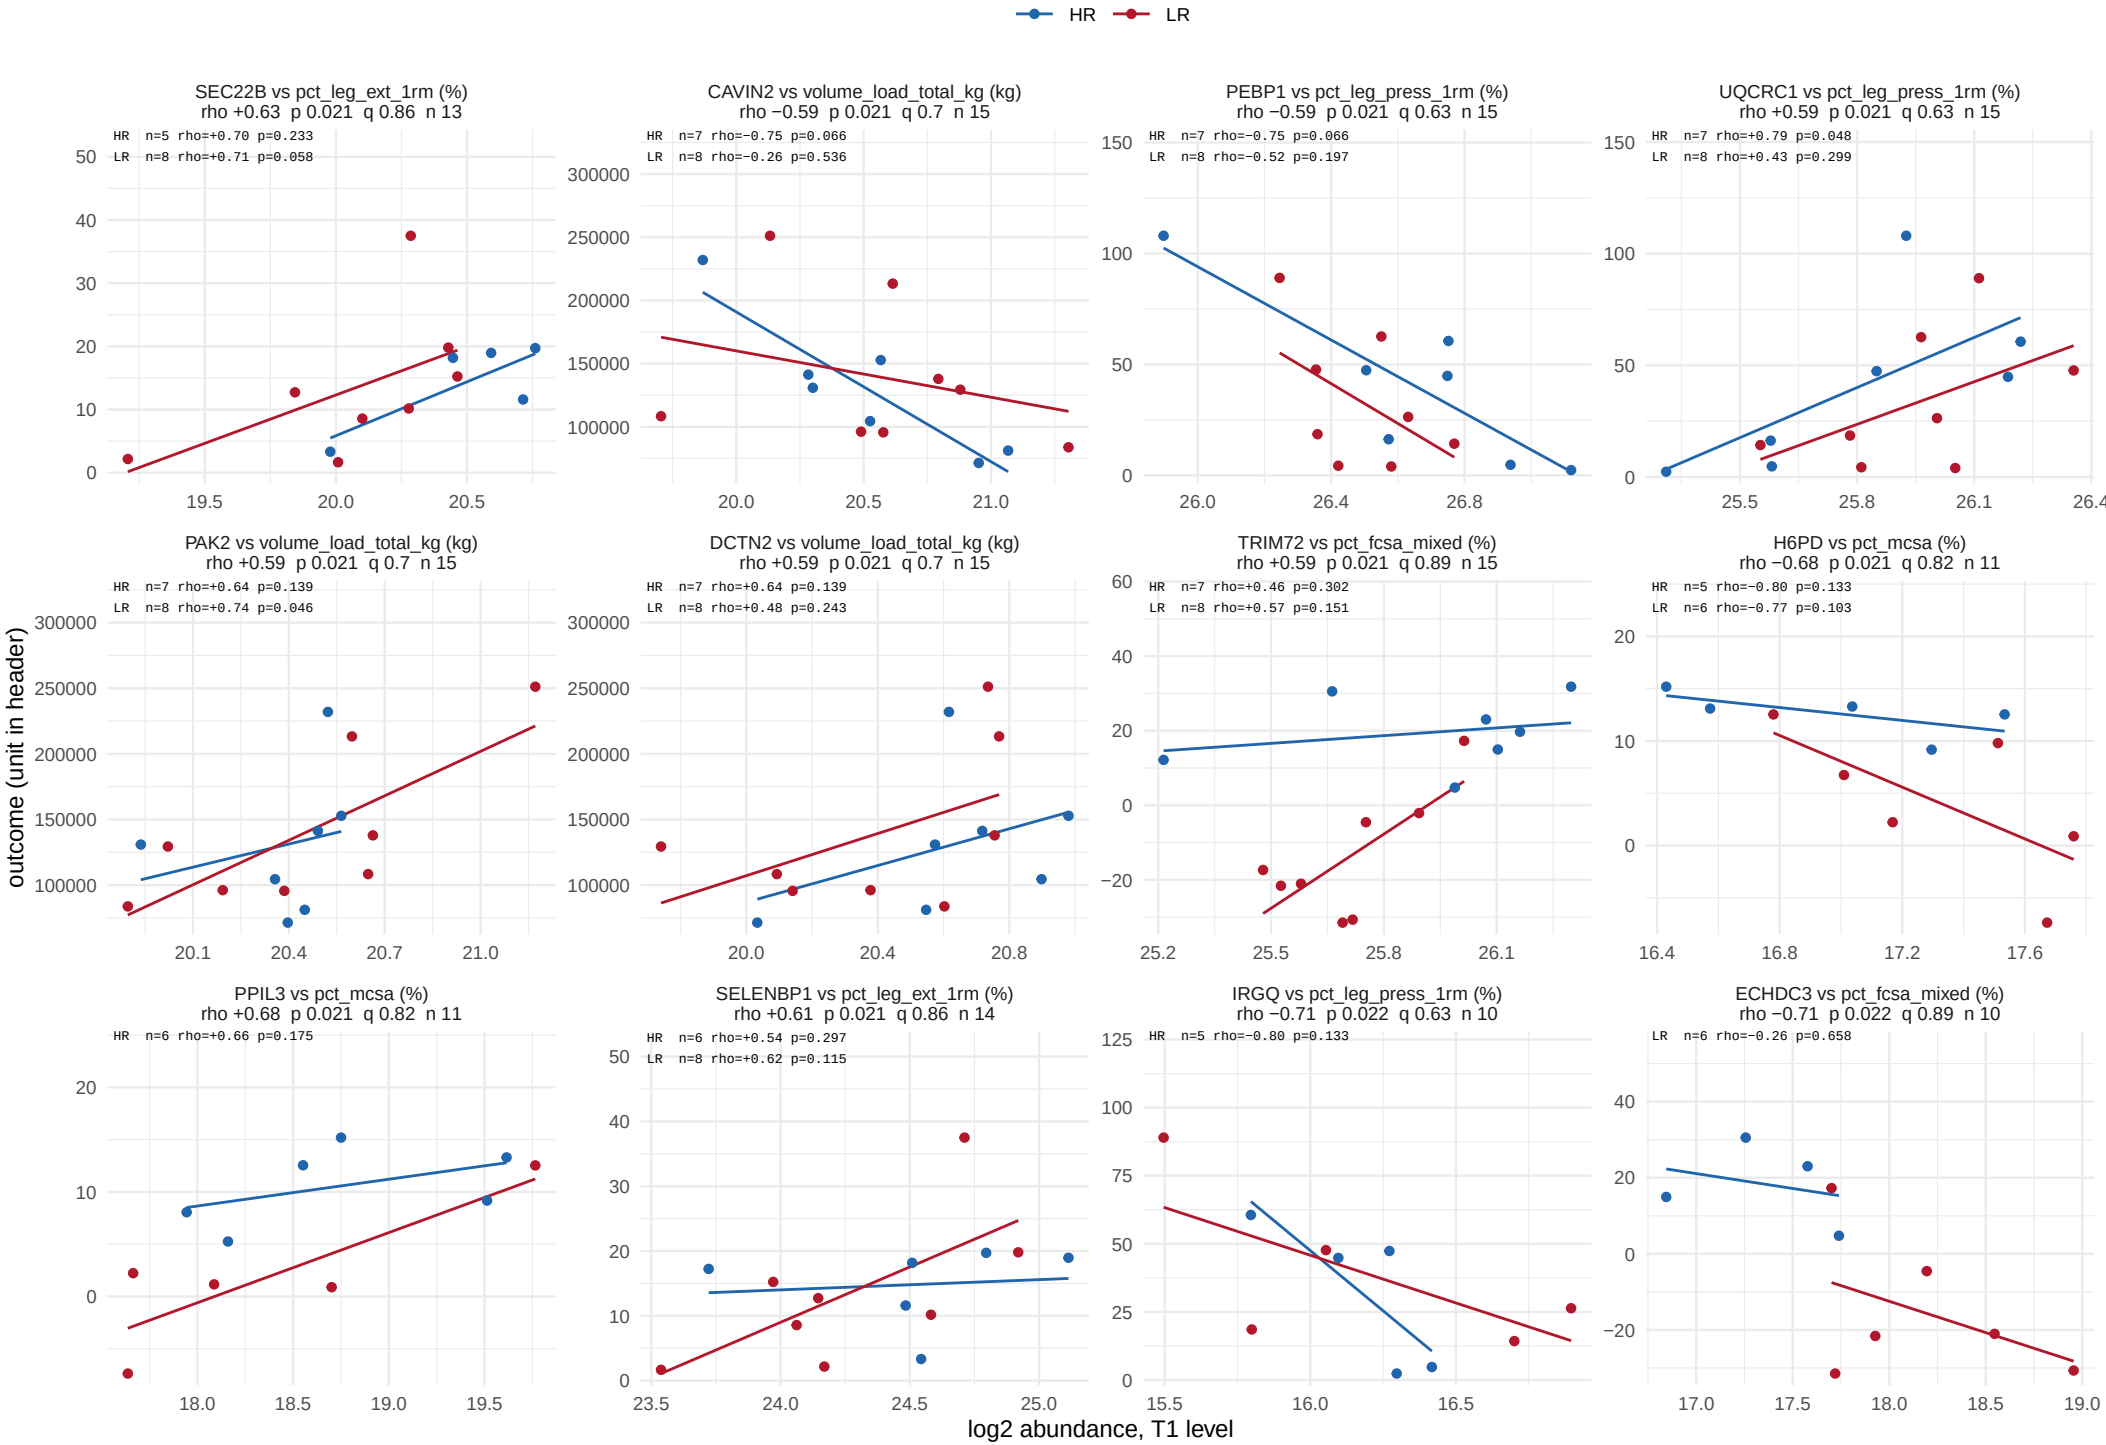

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


654 of 12553 feature−outcome pairs at p < 0.05, 8 at BH < 0.05. Page 24 of 55.

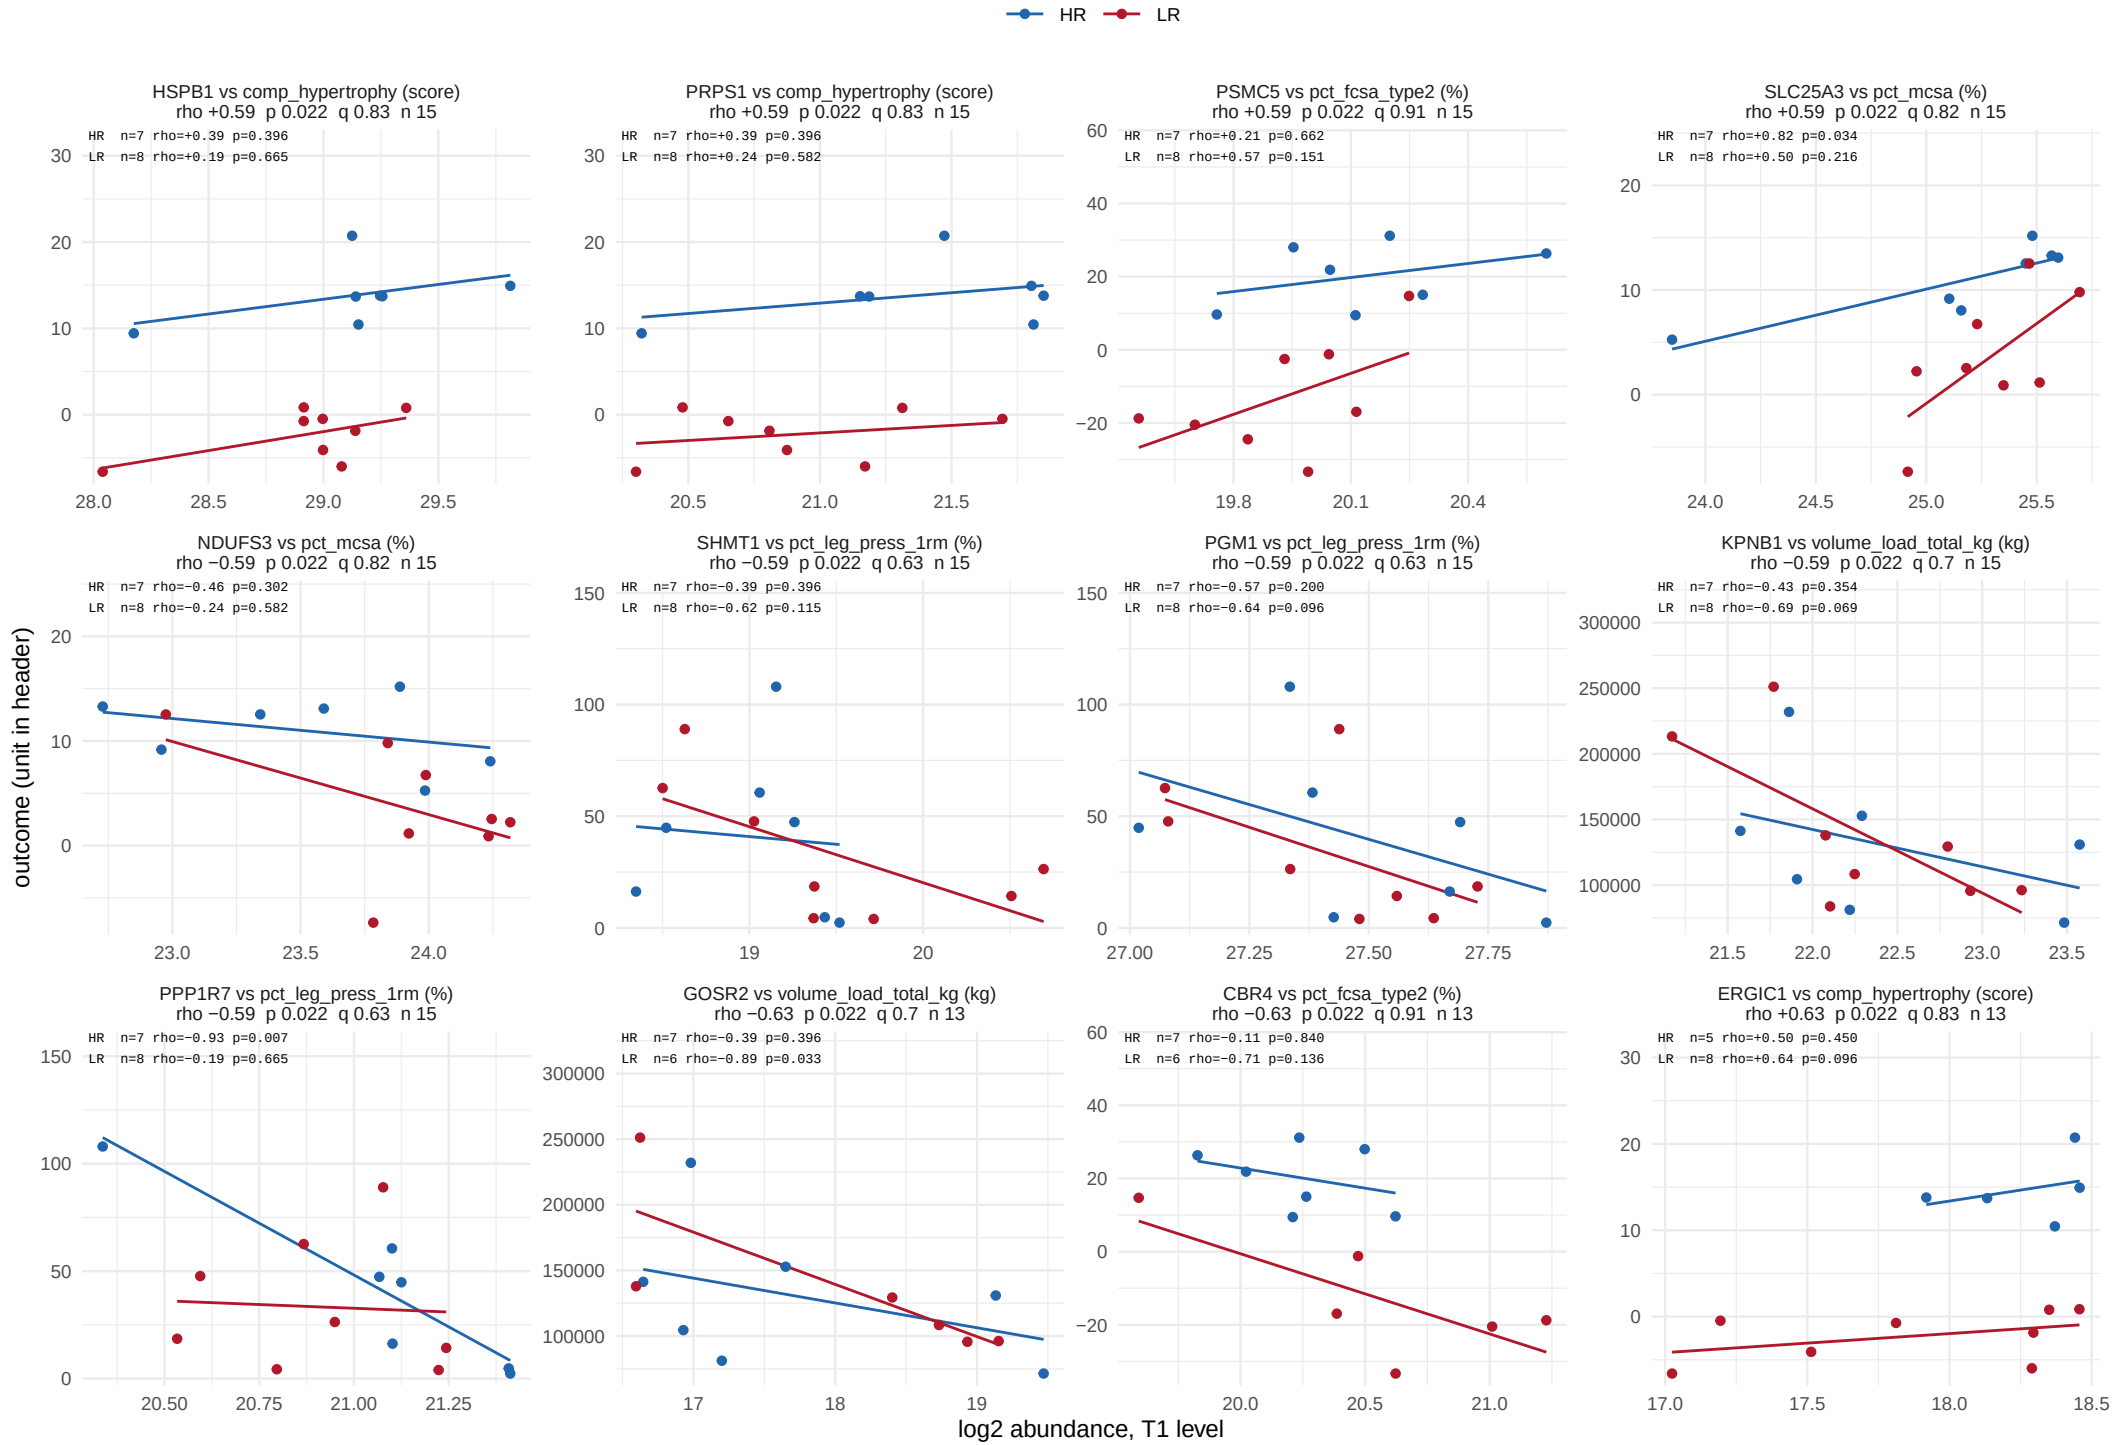

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


654 of 12553 feature−outcome pairs at p < 0.05, 8 at BH < 0.05. Page 25 of 55.

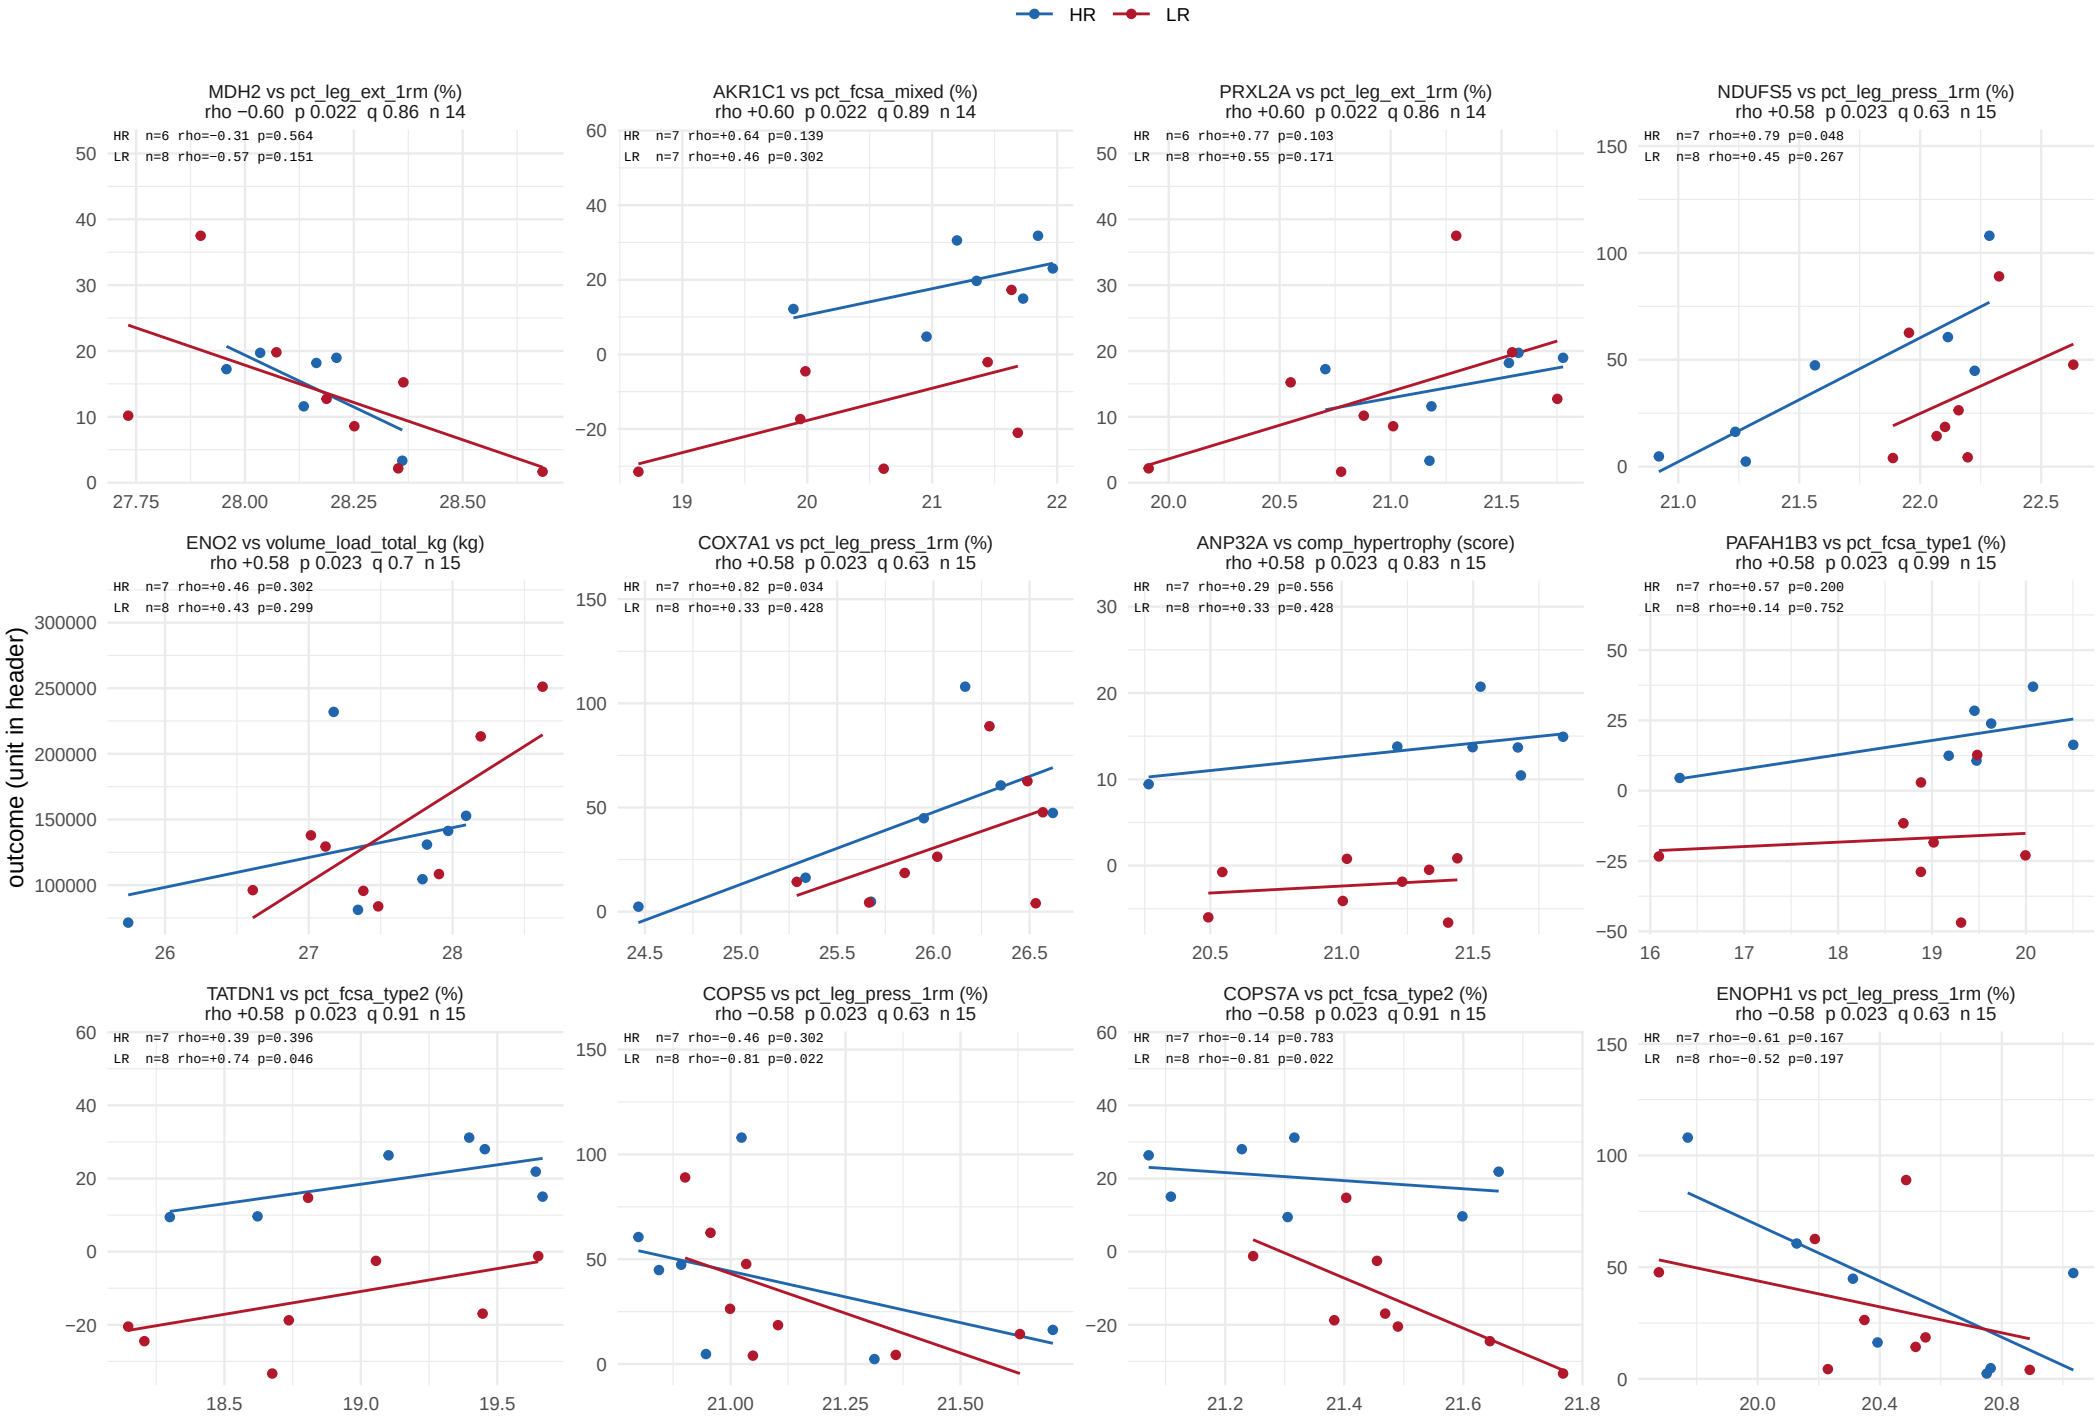

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


654 of 12553 feature−outcome pairs at p < 0.05, 8 at BH < 0.05. Page 26 of 55.

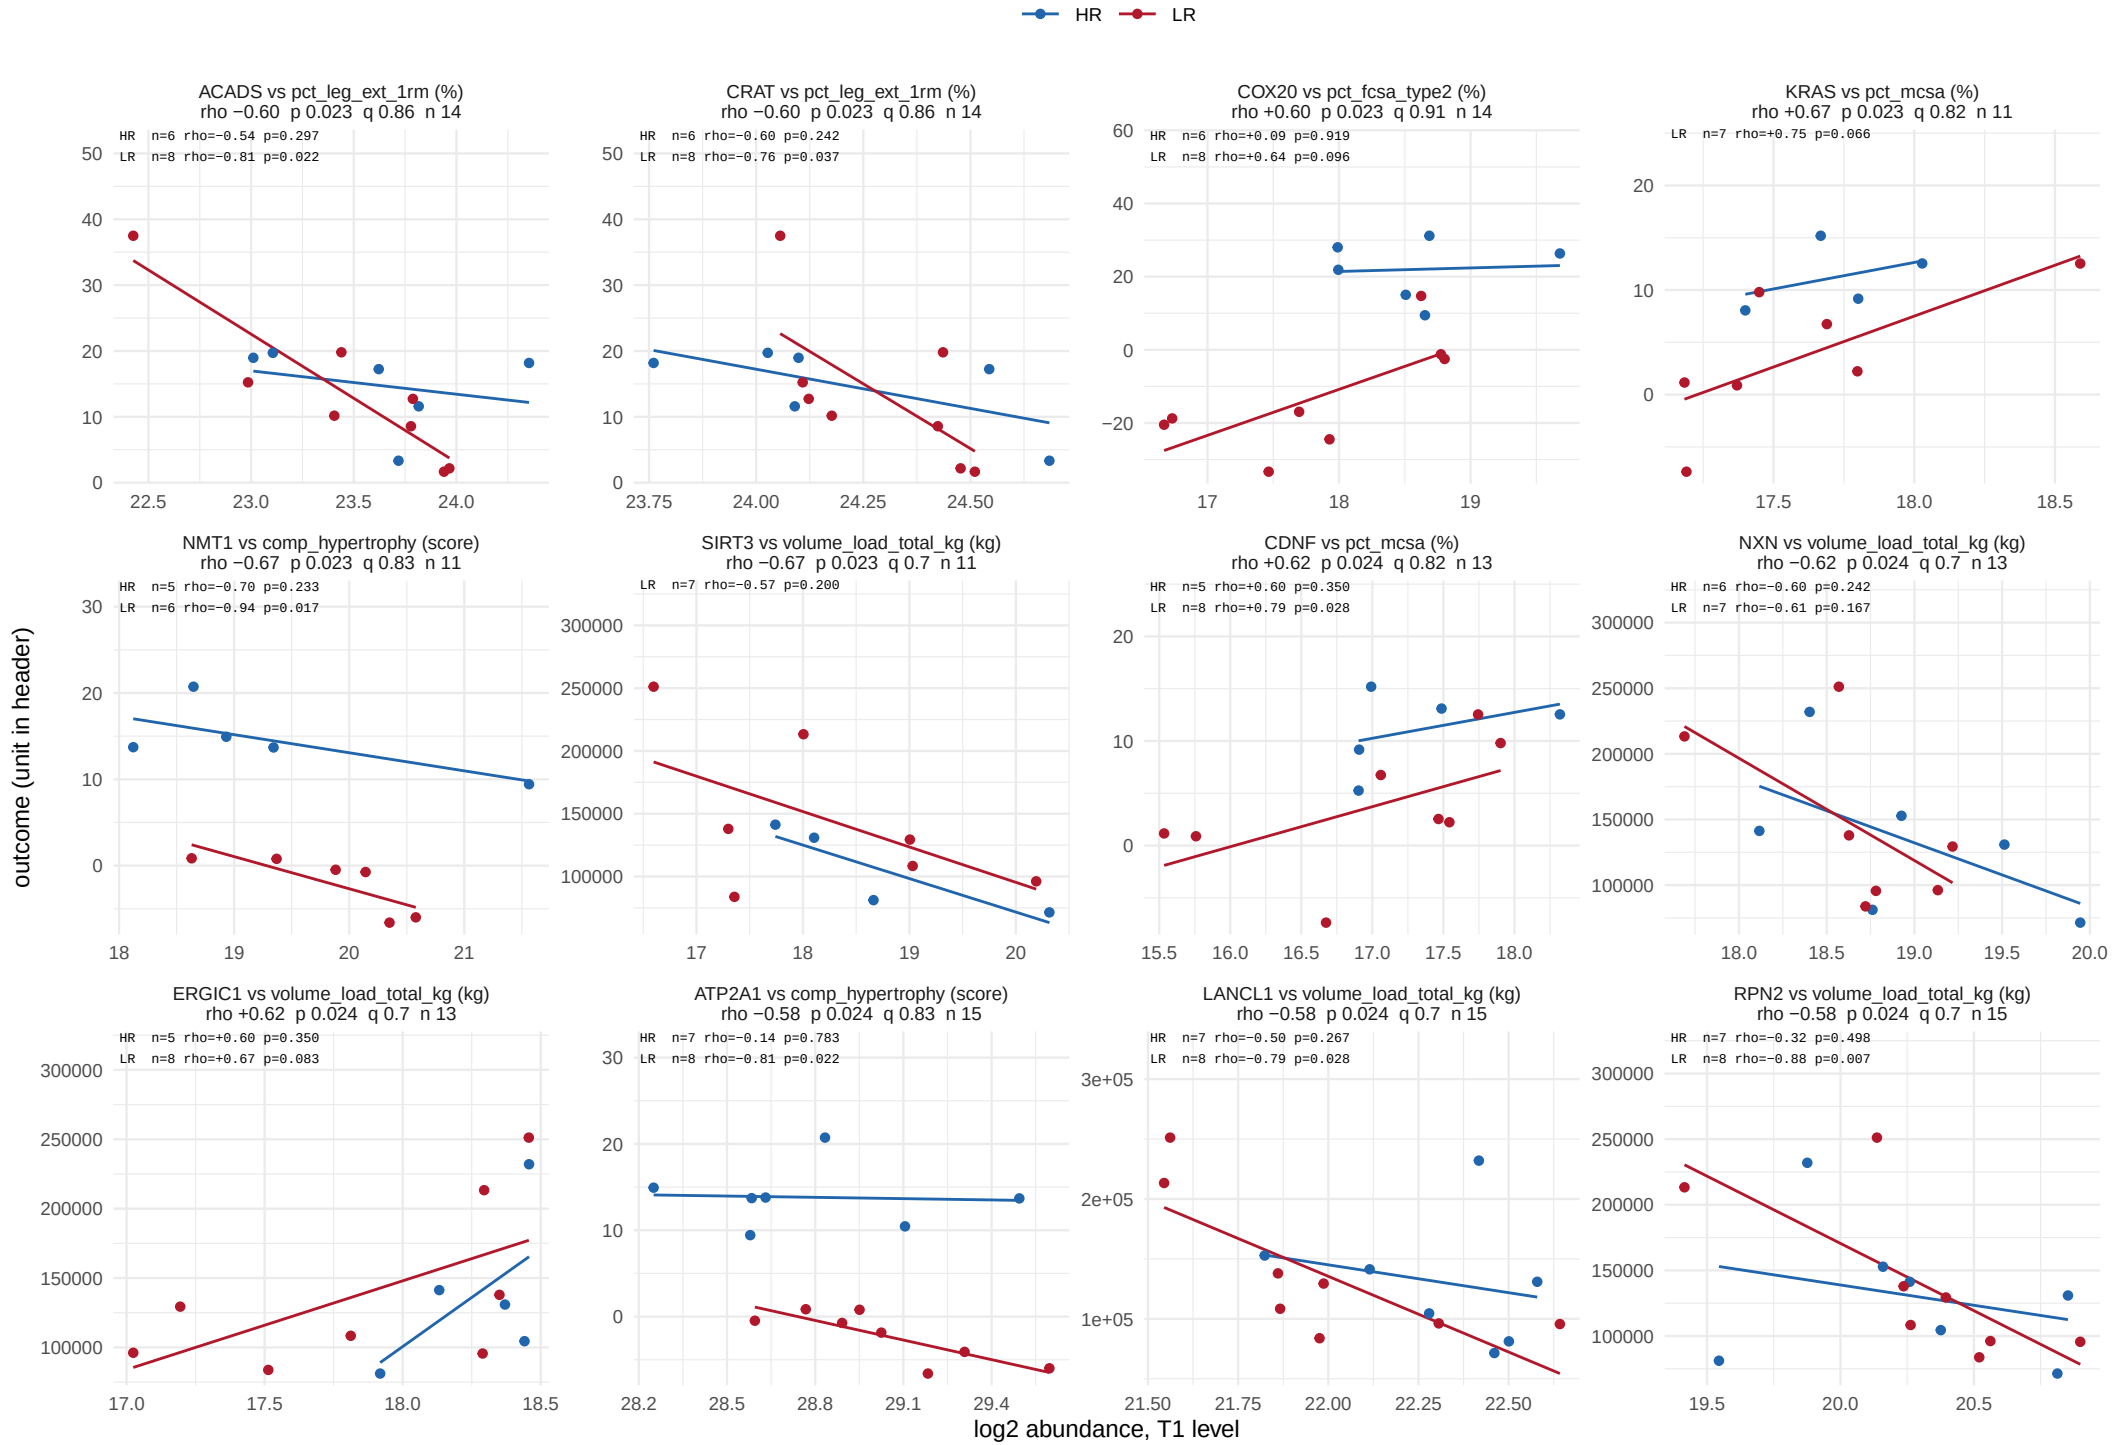

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


654 of 12553 feature−outcome pairs at p < 0.05, 8 at BH < 0.05. Page 27 of 55.

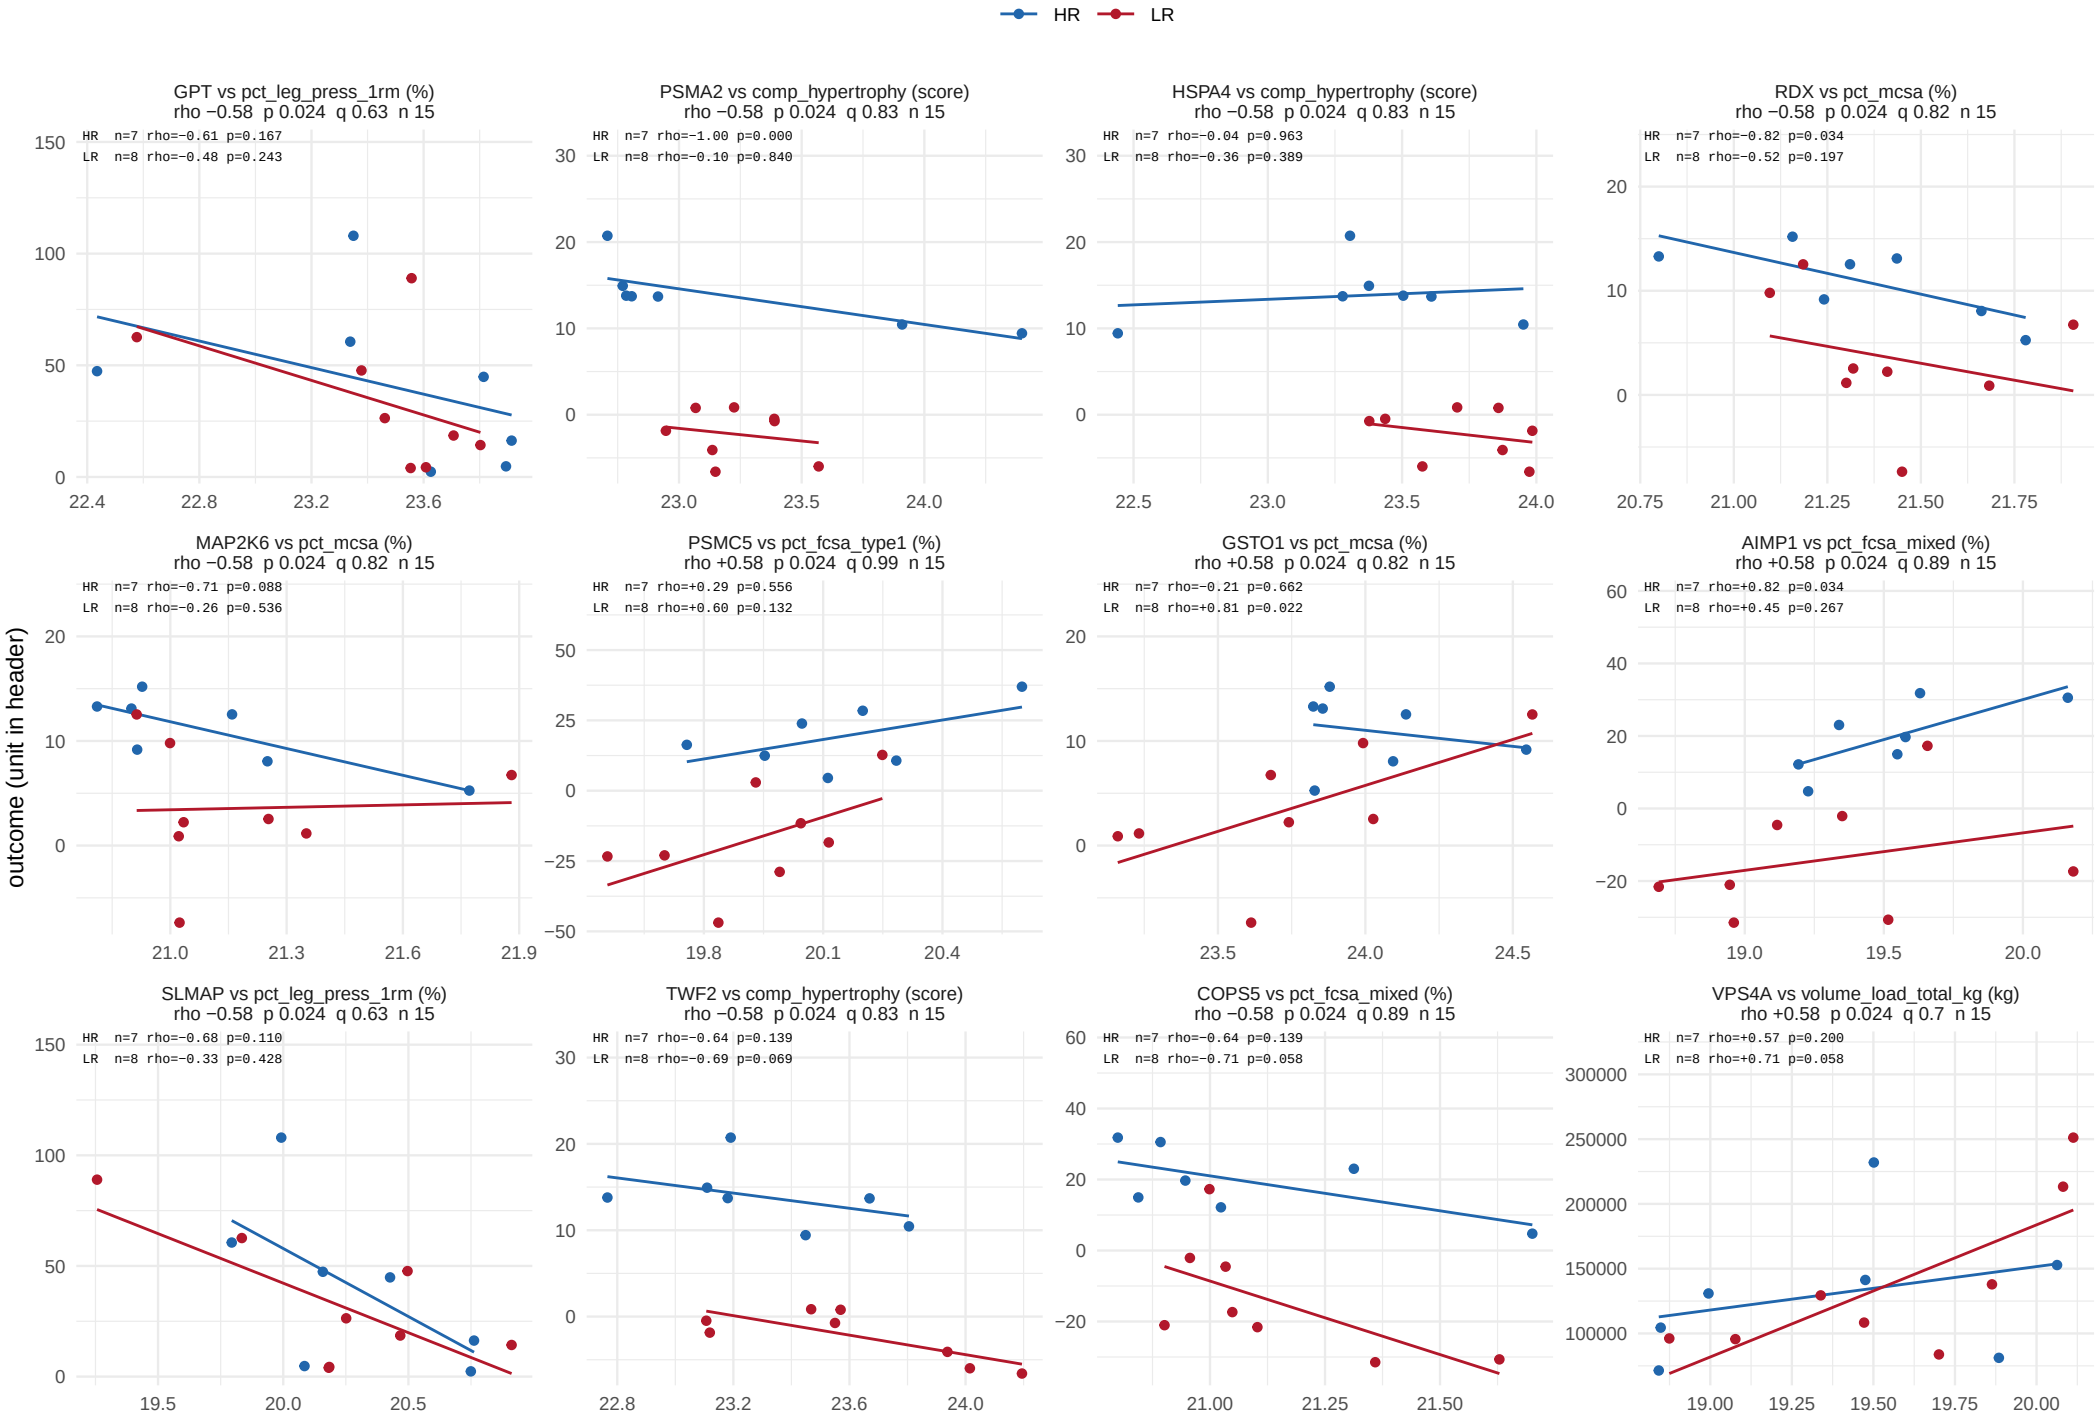

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


654 of 12553 feature−outcome pairs at p < 0.05, 8 at BH < 0.05. Page 28 of 55.

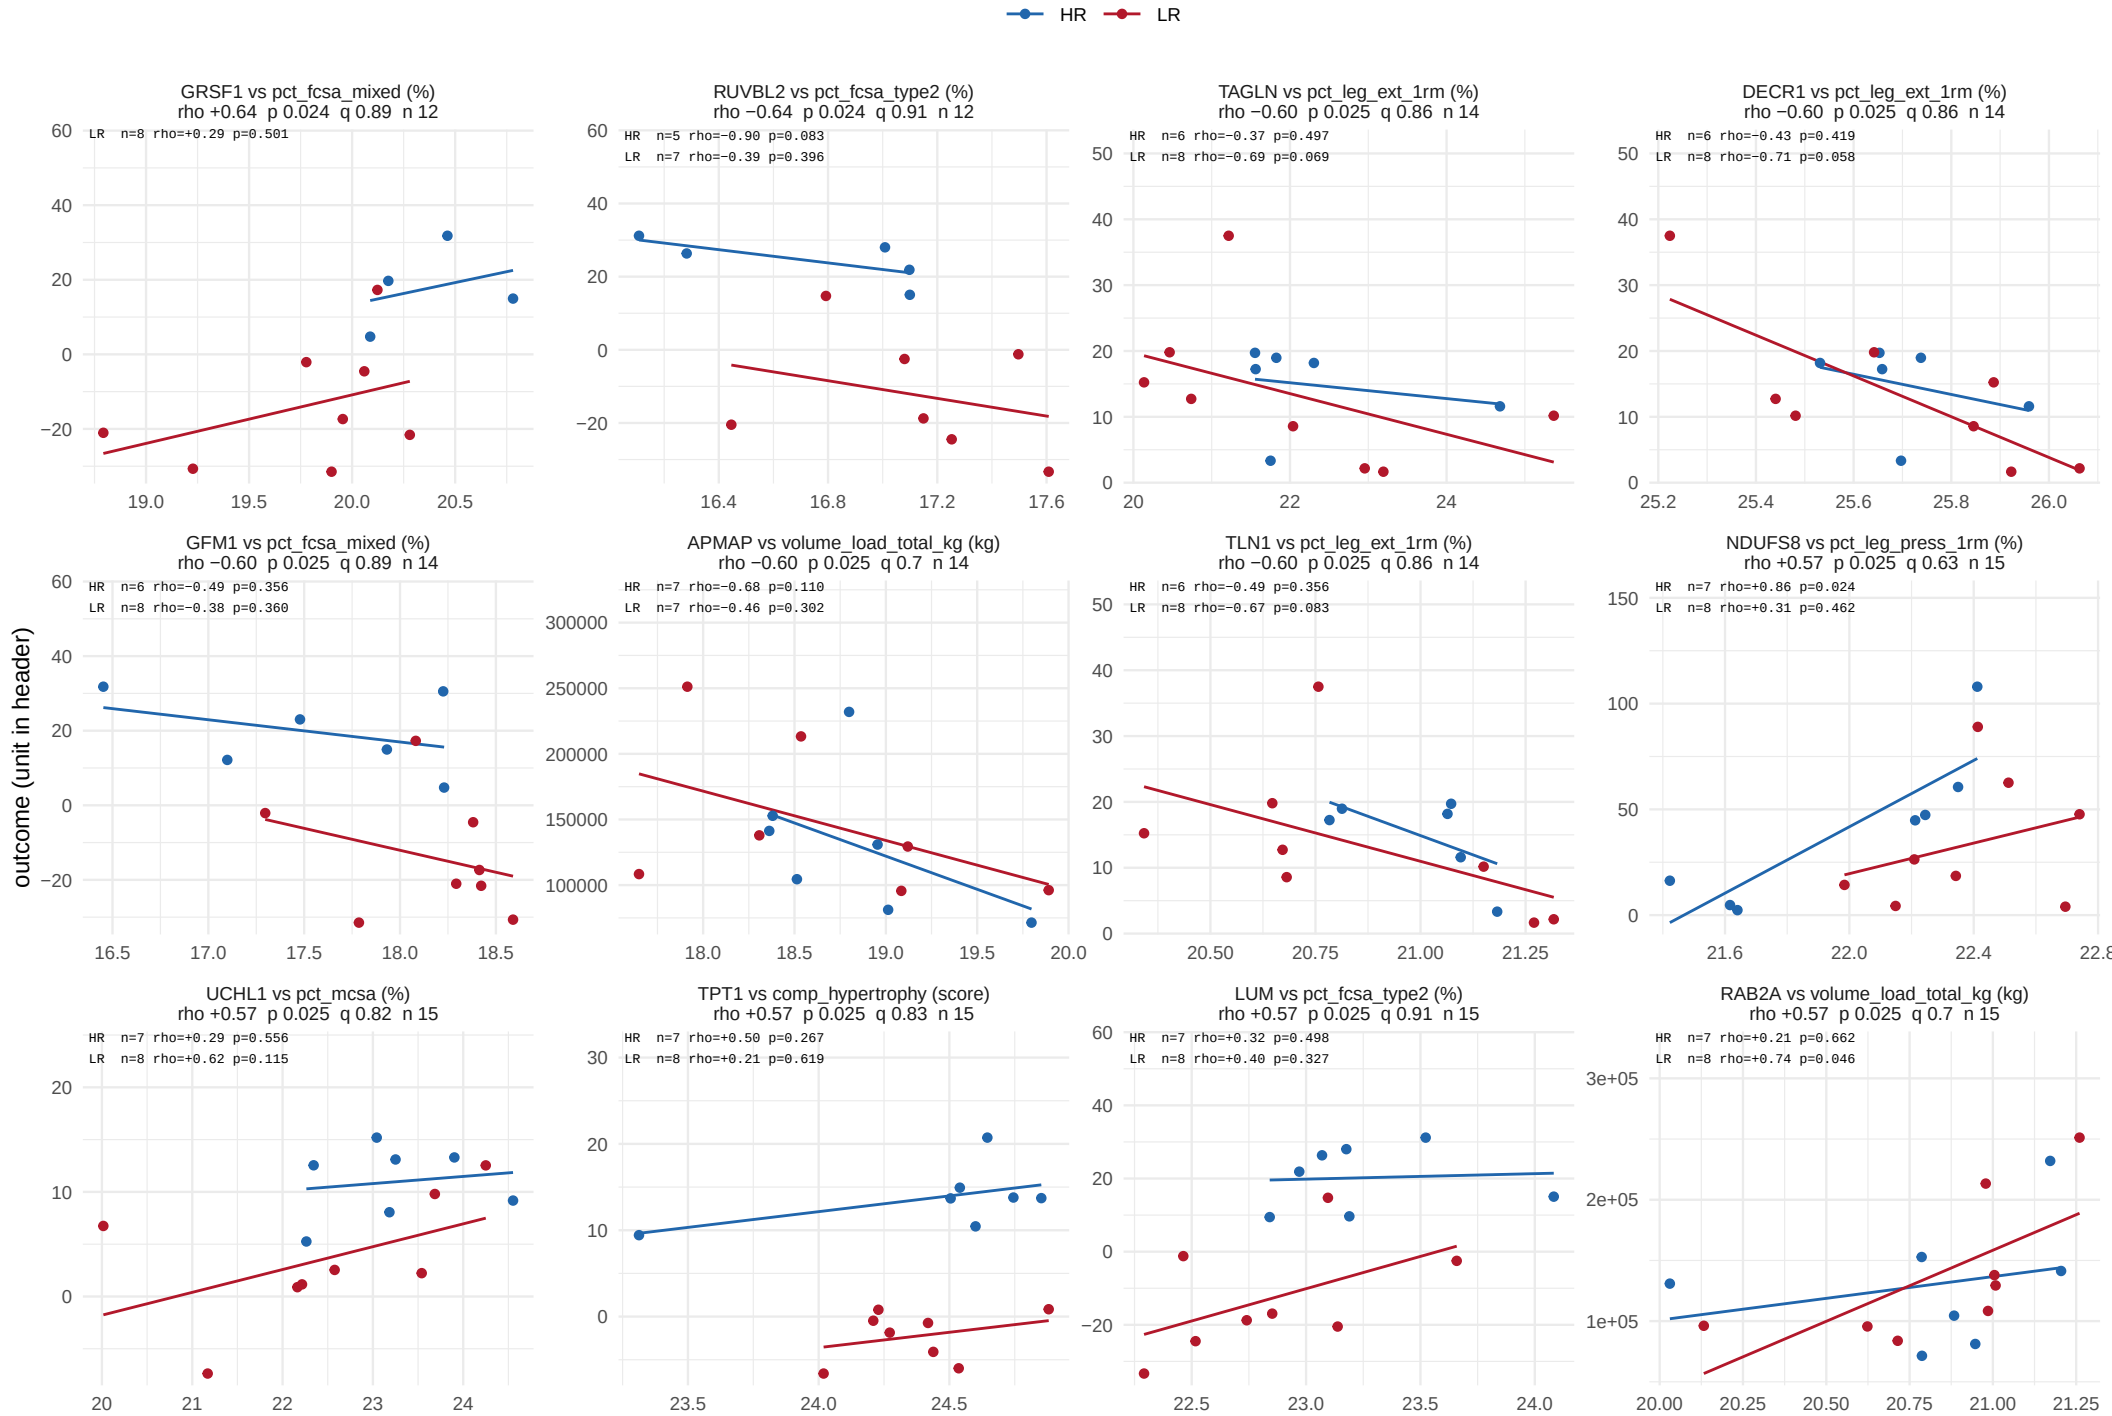

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


654 of 12553 feature−outcome pairs at p < 0.05, 8 at BH < 0.05. Page 29 of 55.

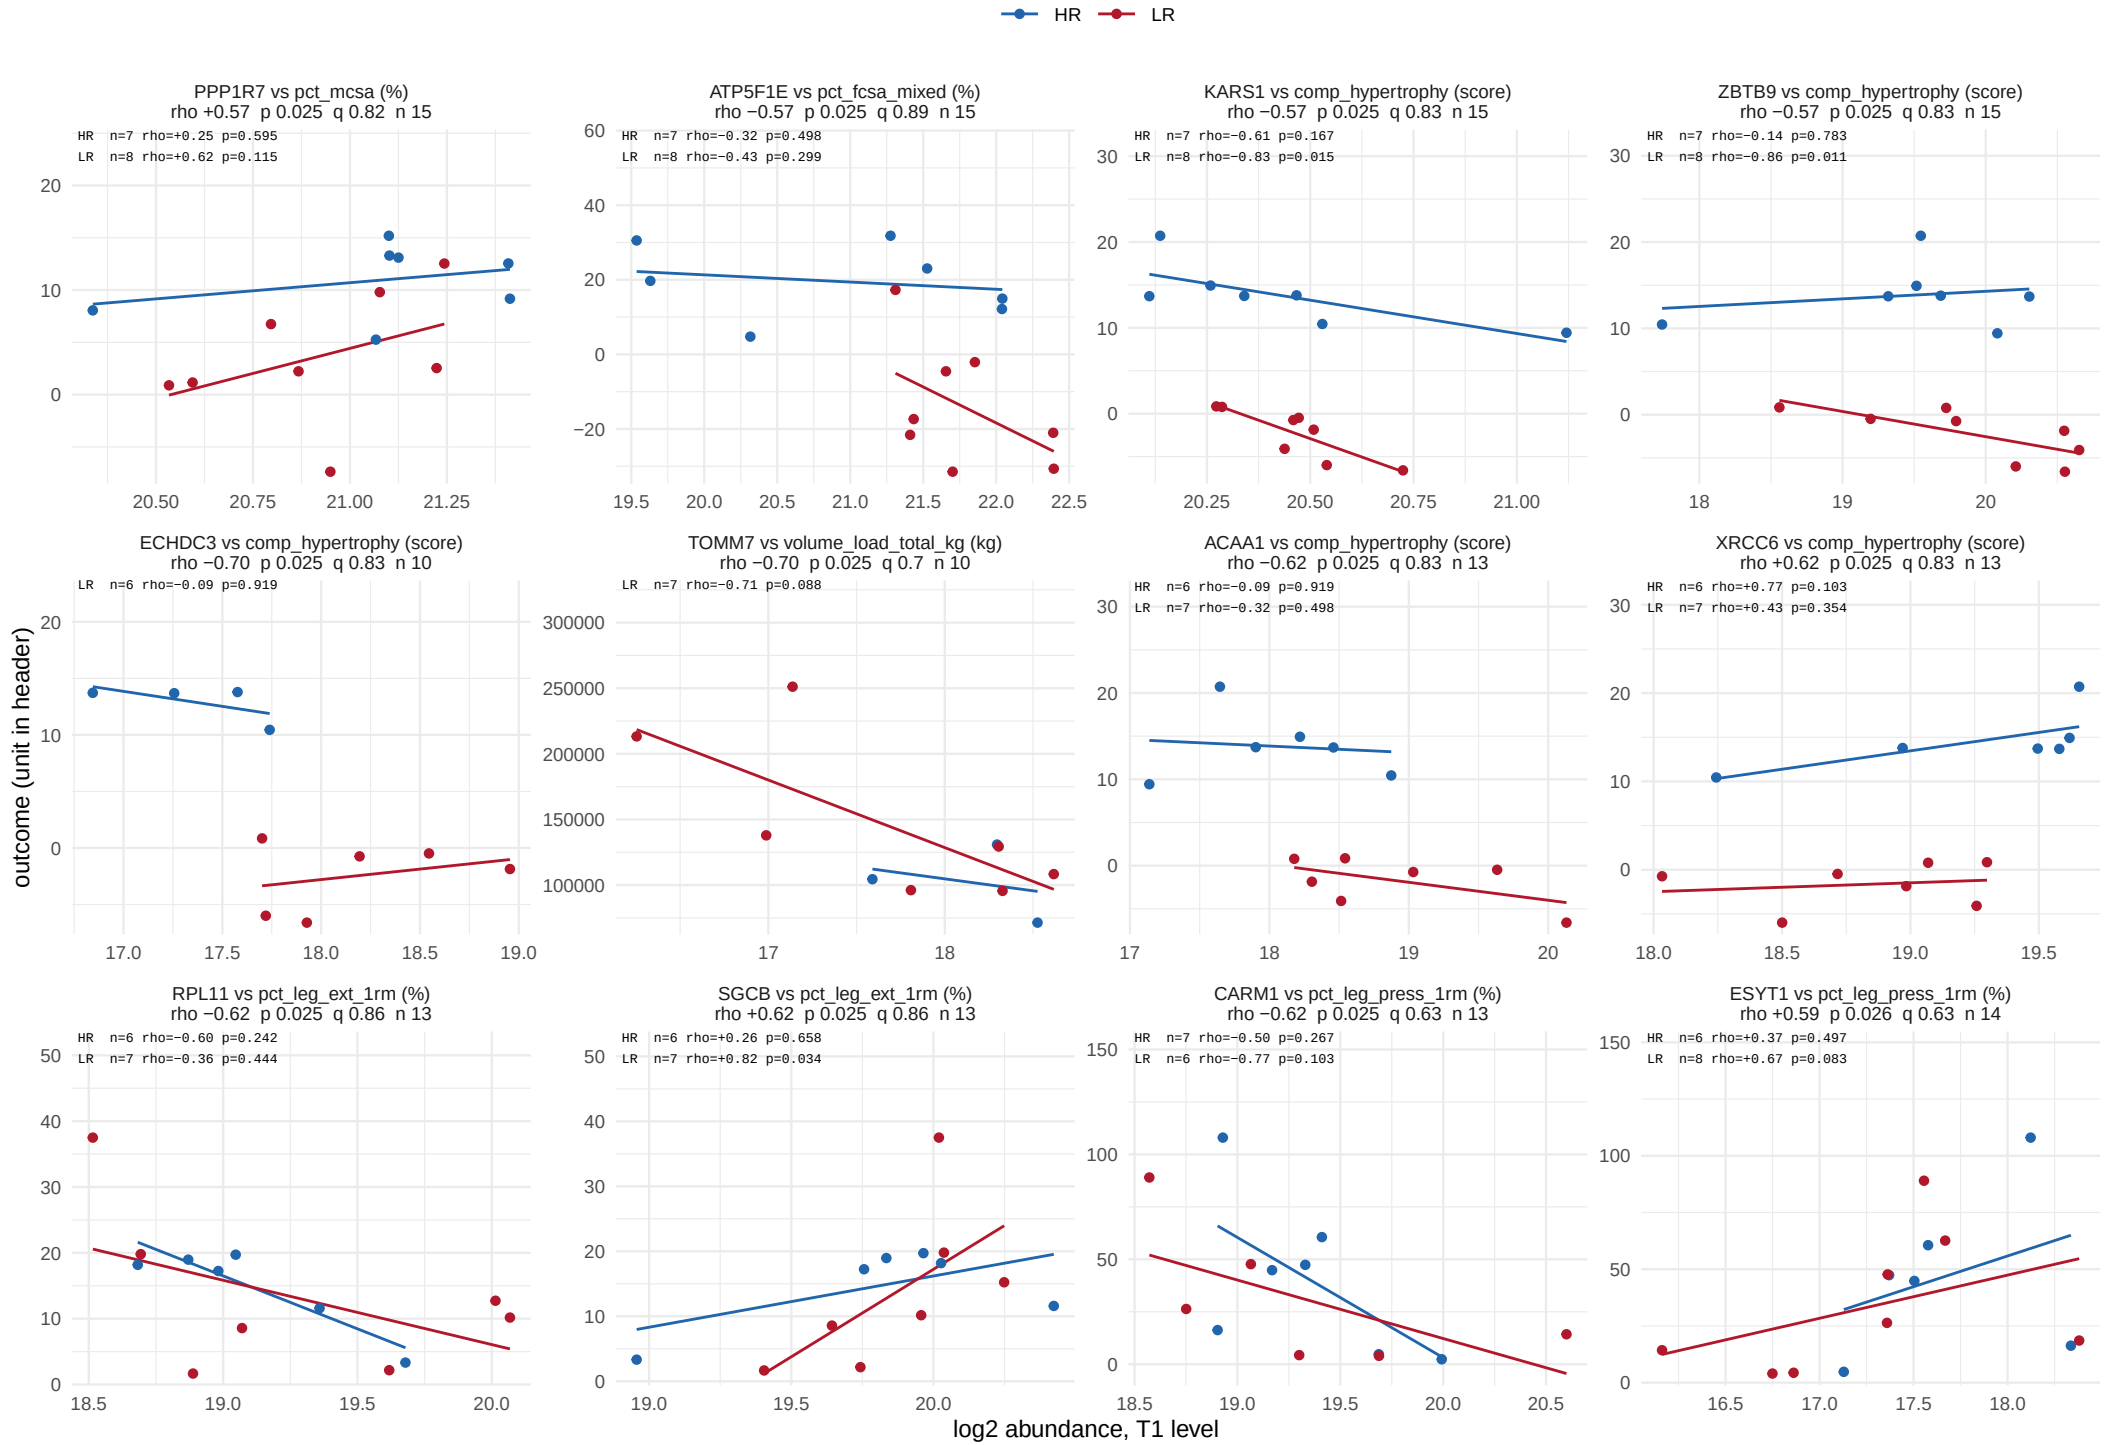

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


654 of 12553 feature−outcome pairs at p < 0.05, 8 at BH < 0.05. Page 30 of 55.

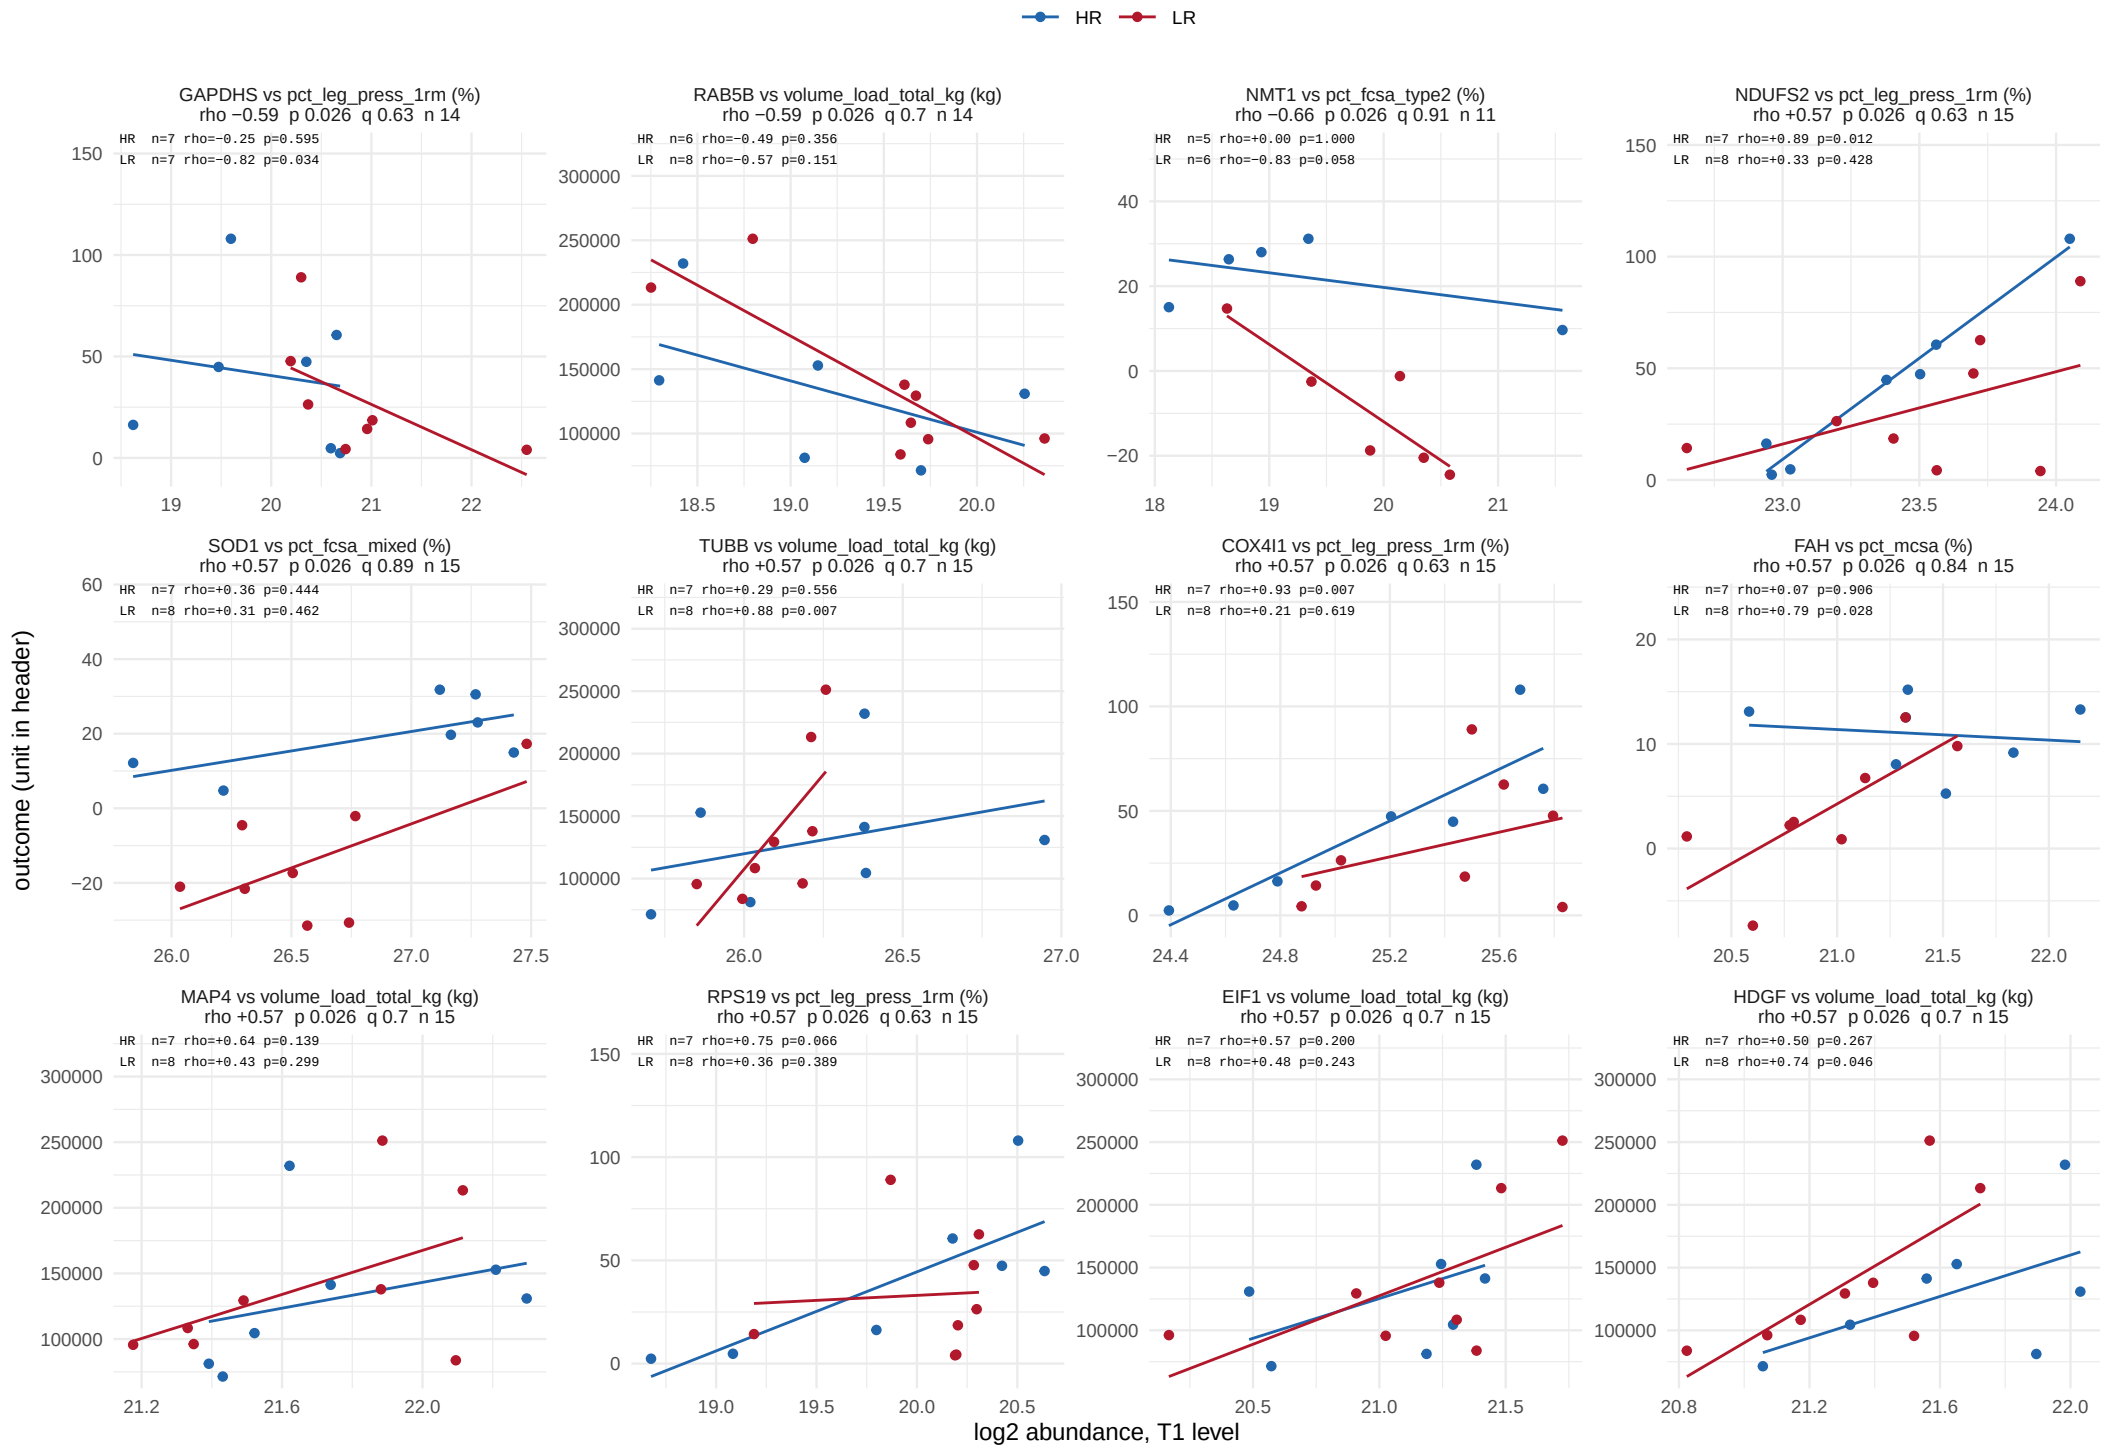

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


654 of 12553 feature−outcome pairs at p < 0.05, 8 at BH < 0.05. Page 31 of 55.

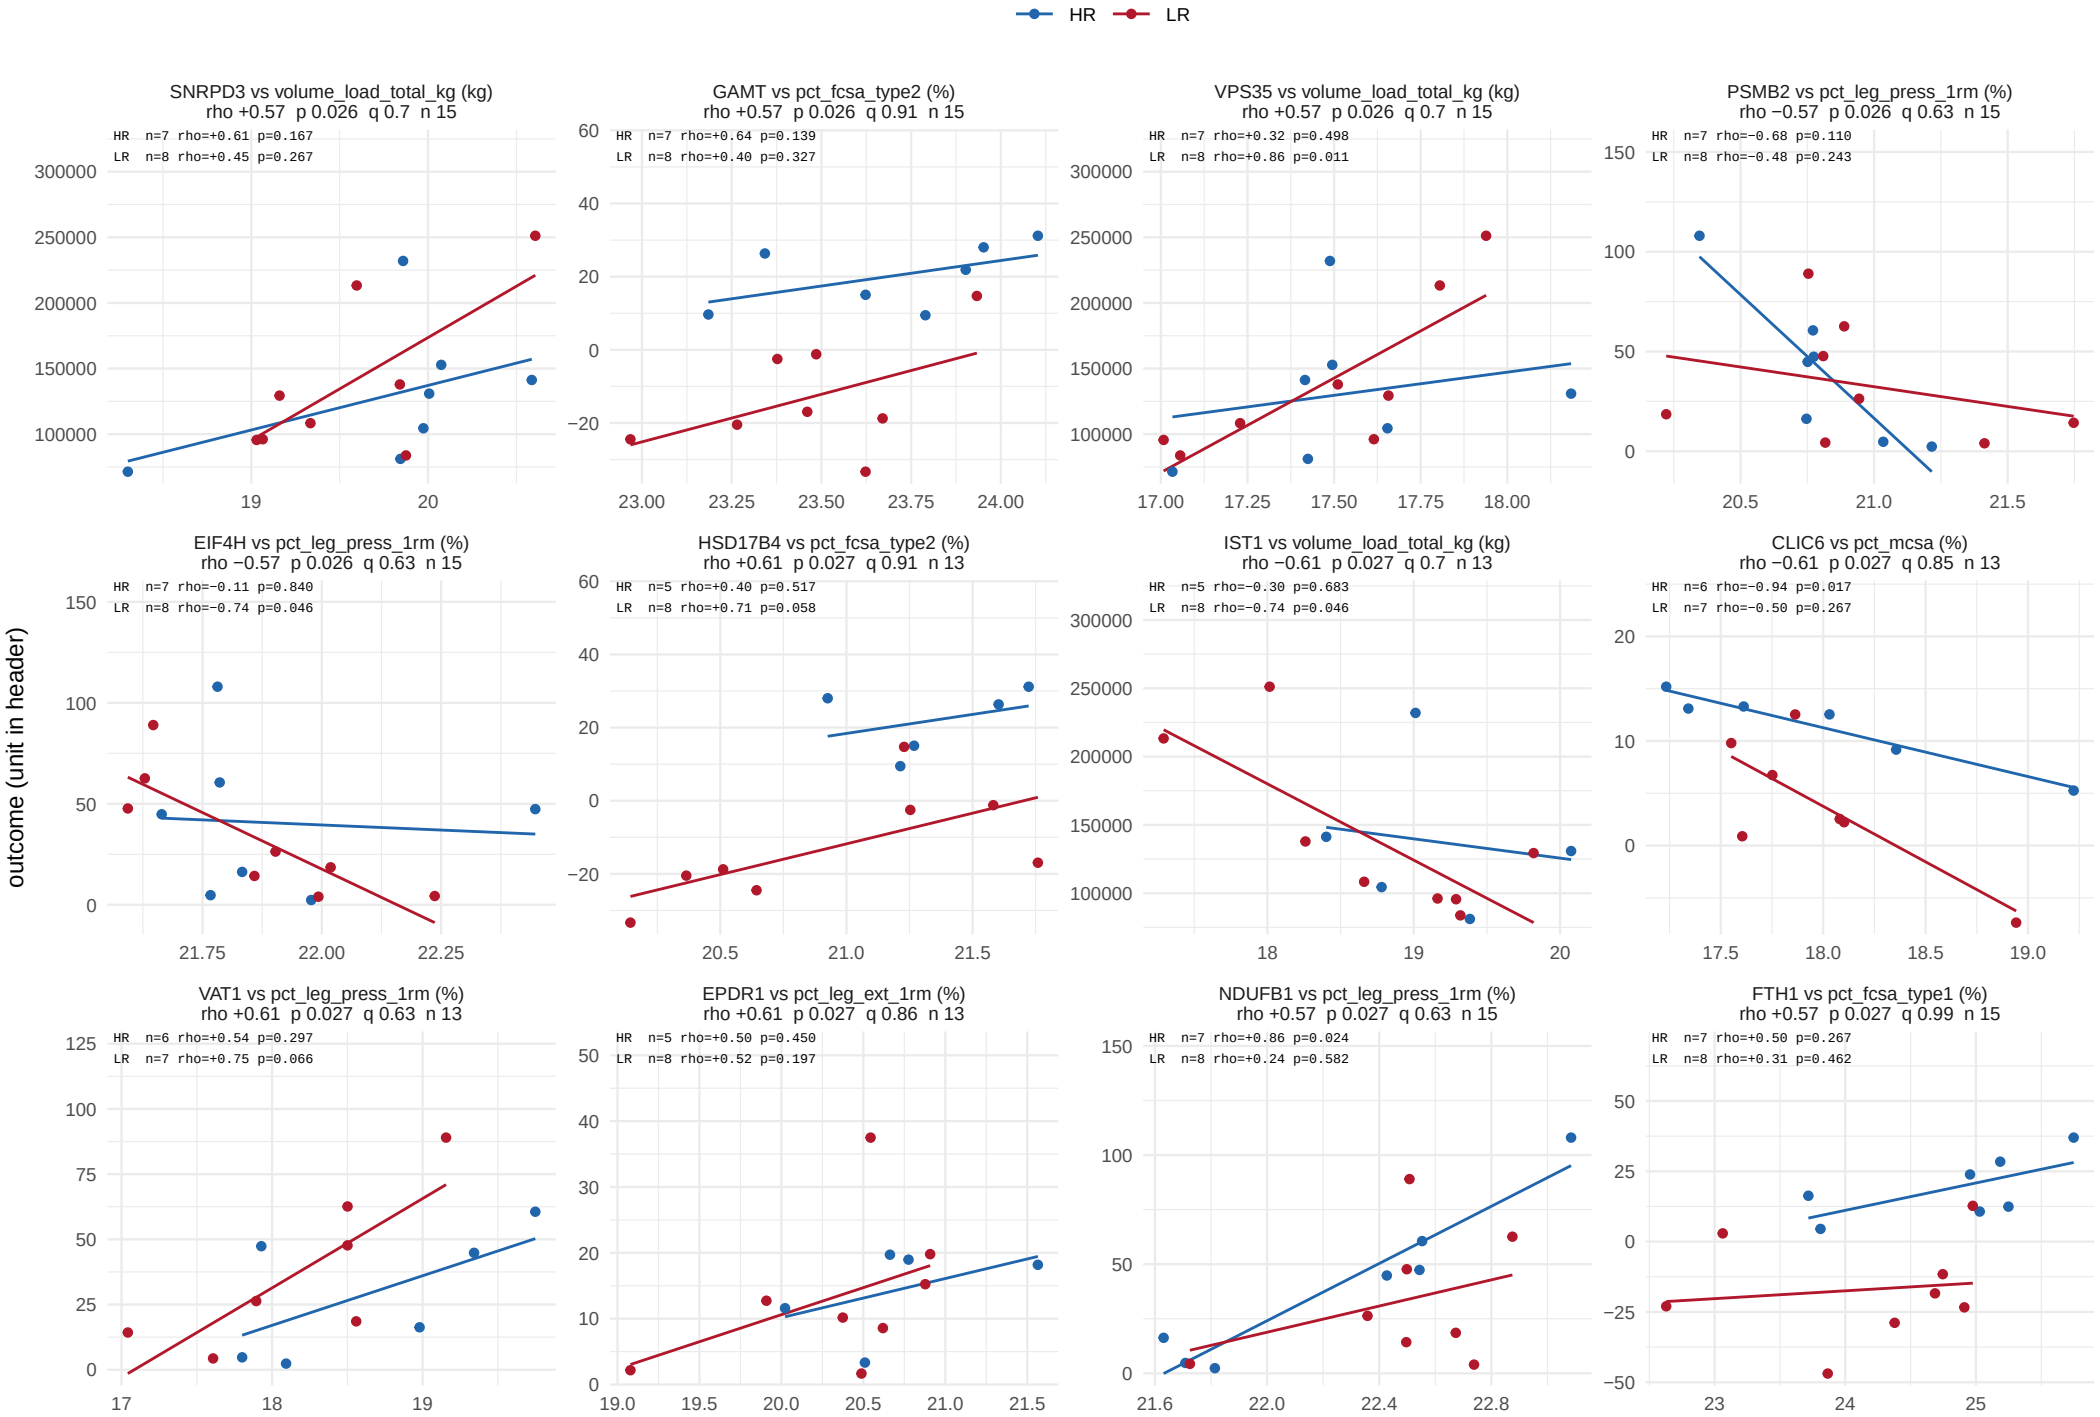

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


654 of 12553 feature−outcome pairs at p < 0.05, 8 at BH < 0.05. Page 32 of 55.

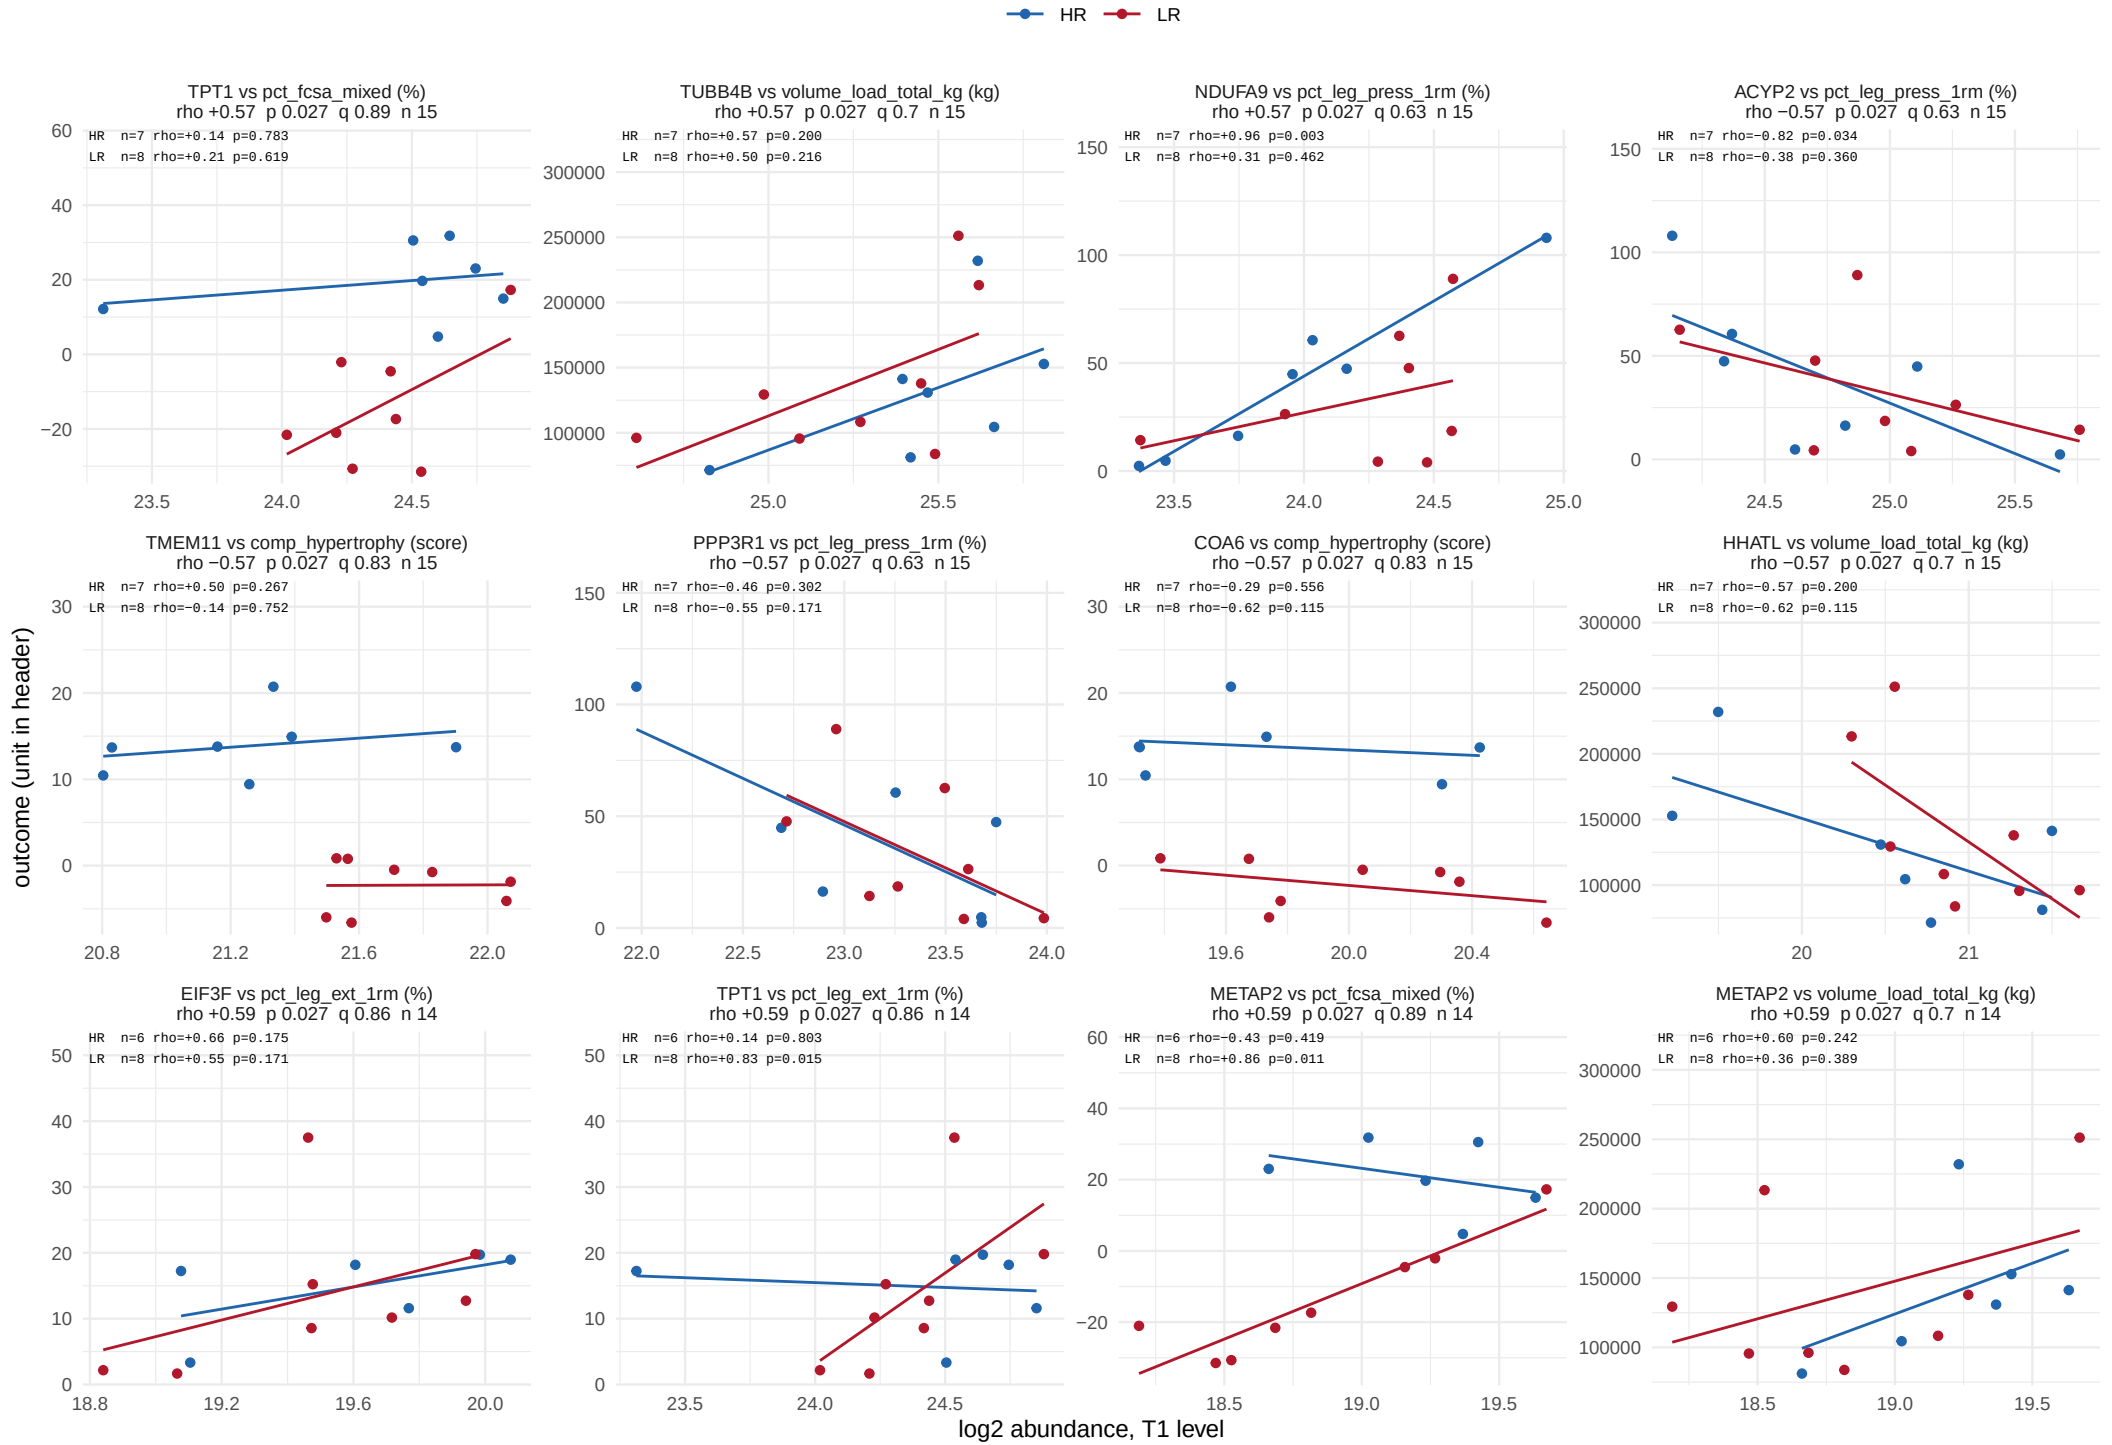

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


654 of 12553 feature−outcome pairs at p < 0.05, 8 at BH < 0.05. Page 33 of 55.

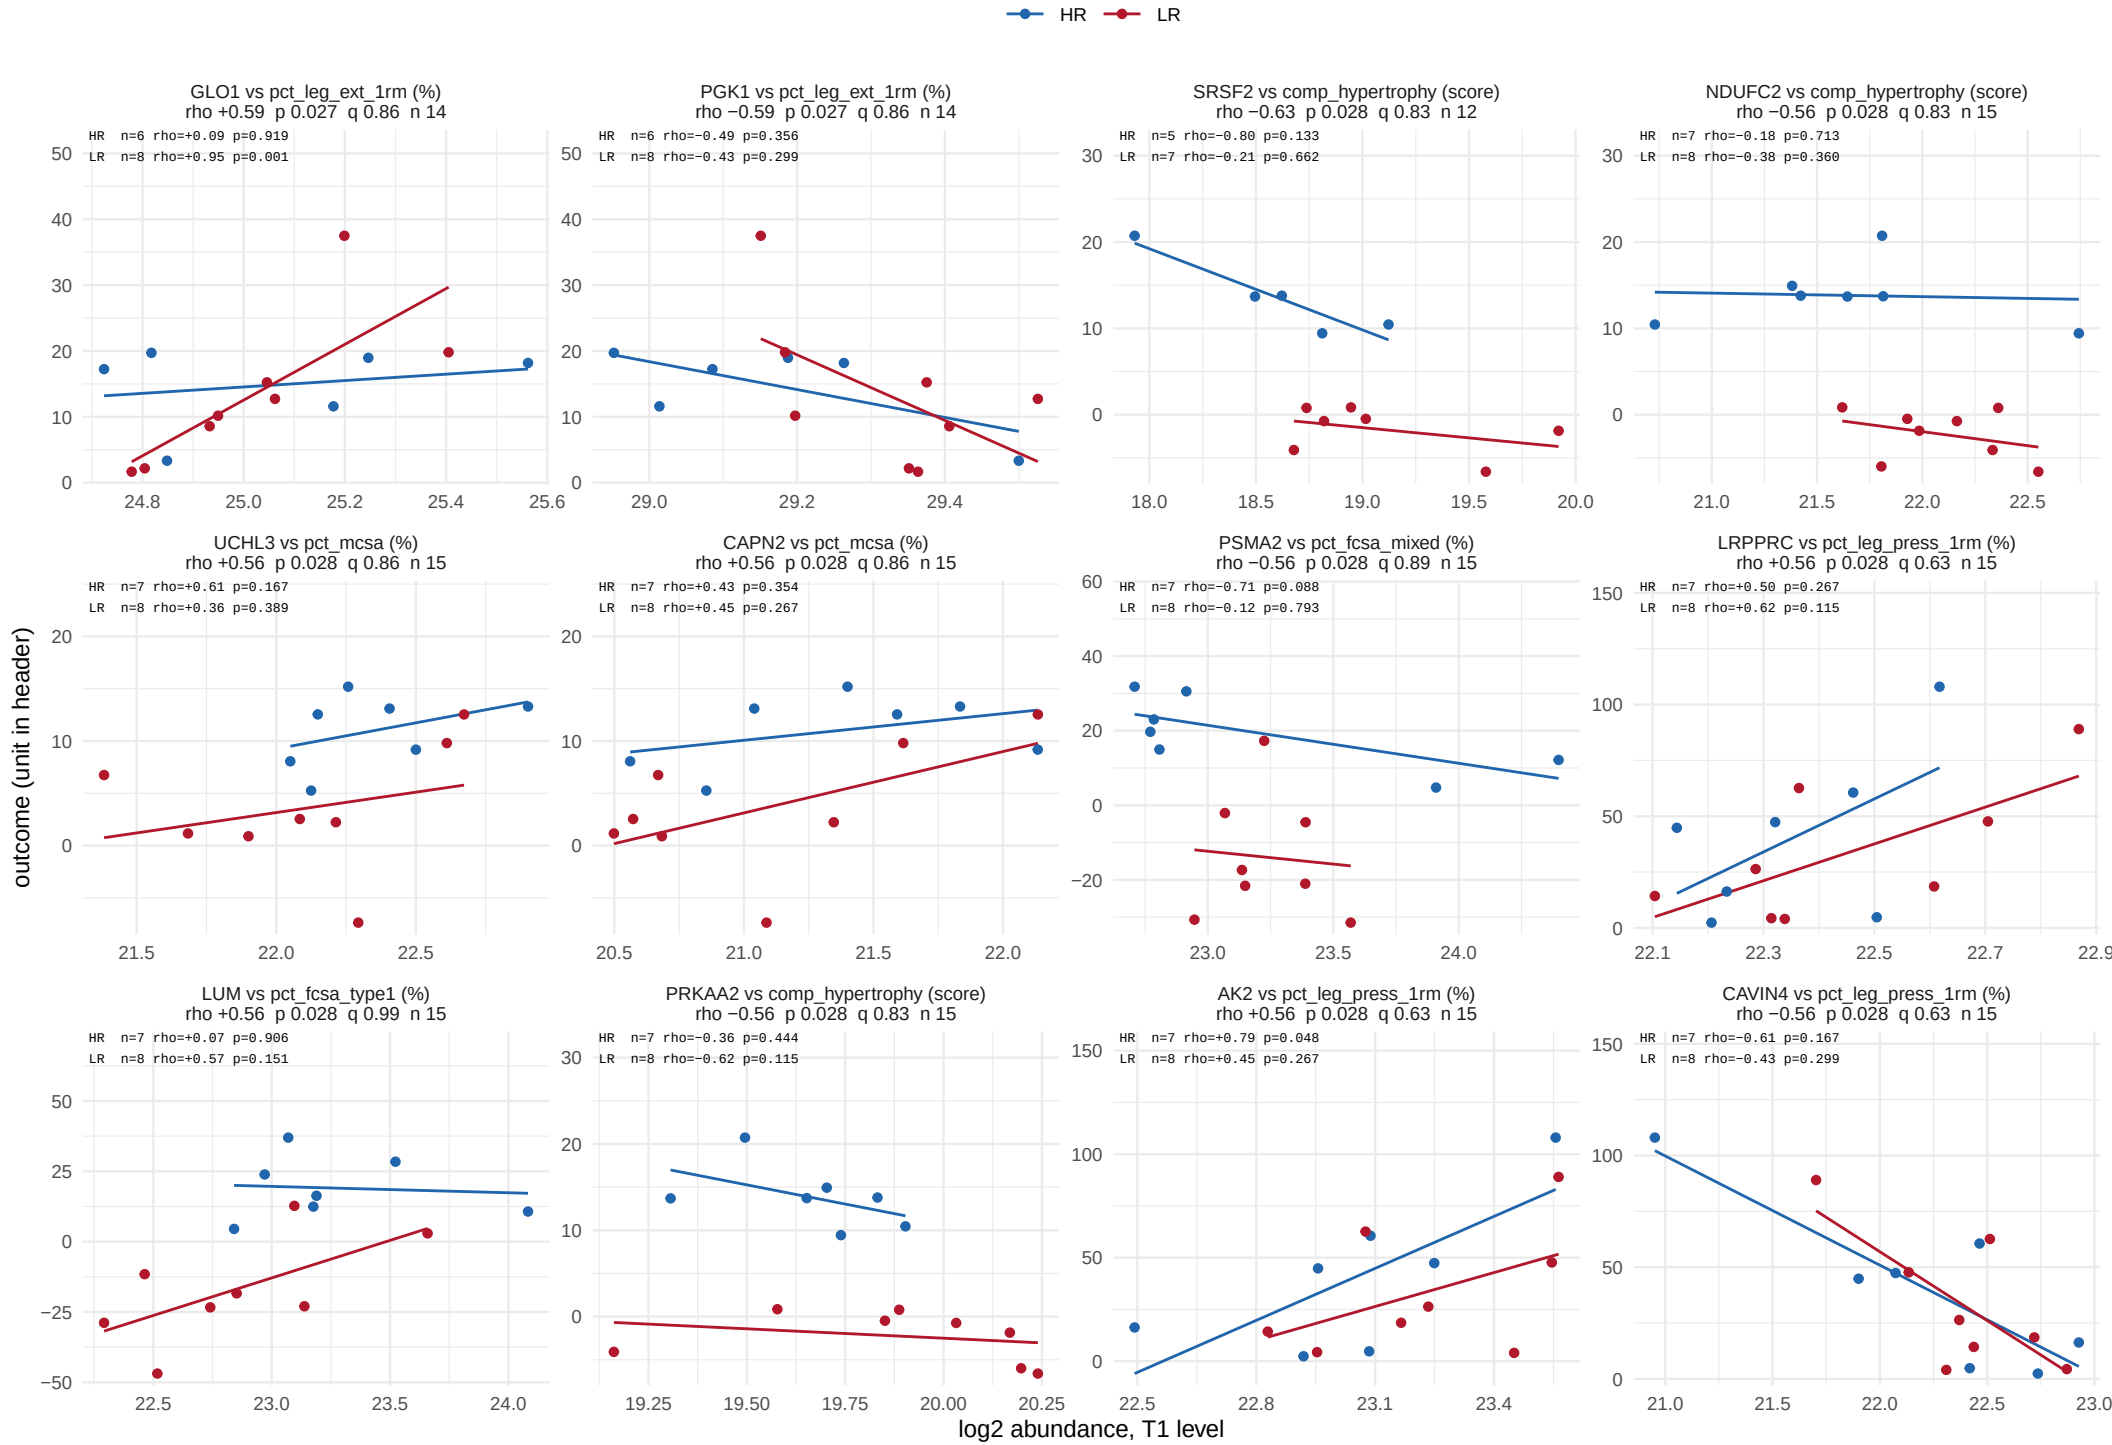

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


654 of 12553 feature−outcome pairs at p < 0.05, 8 at BH < 0.05. Page 34 of 55.

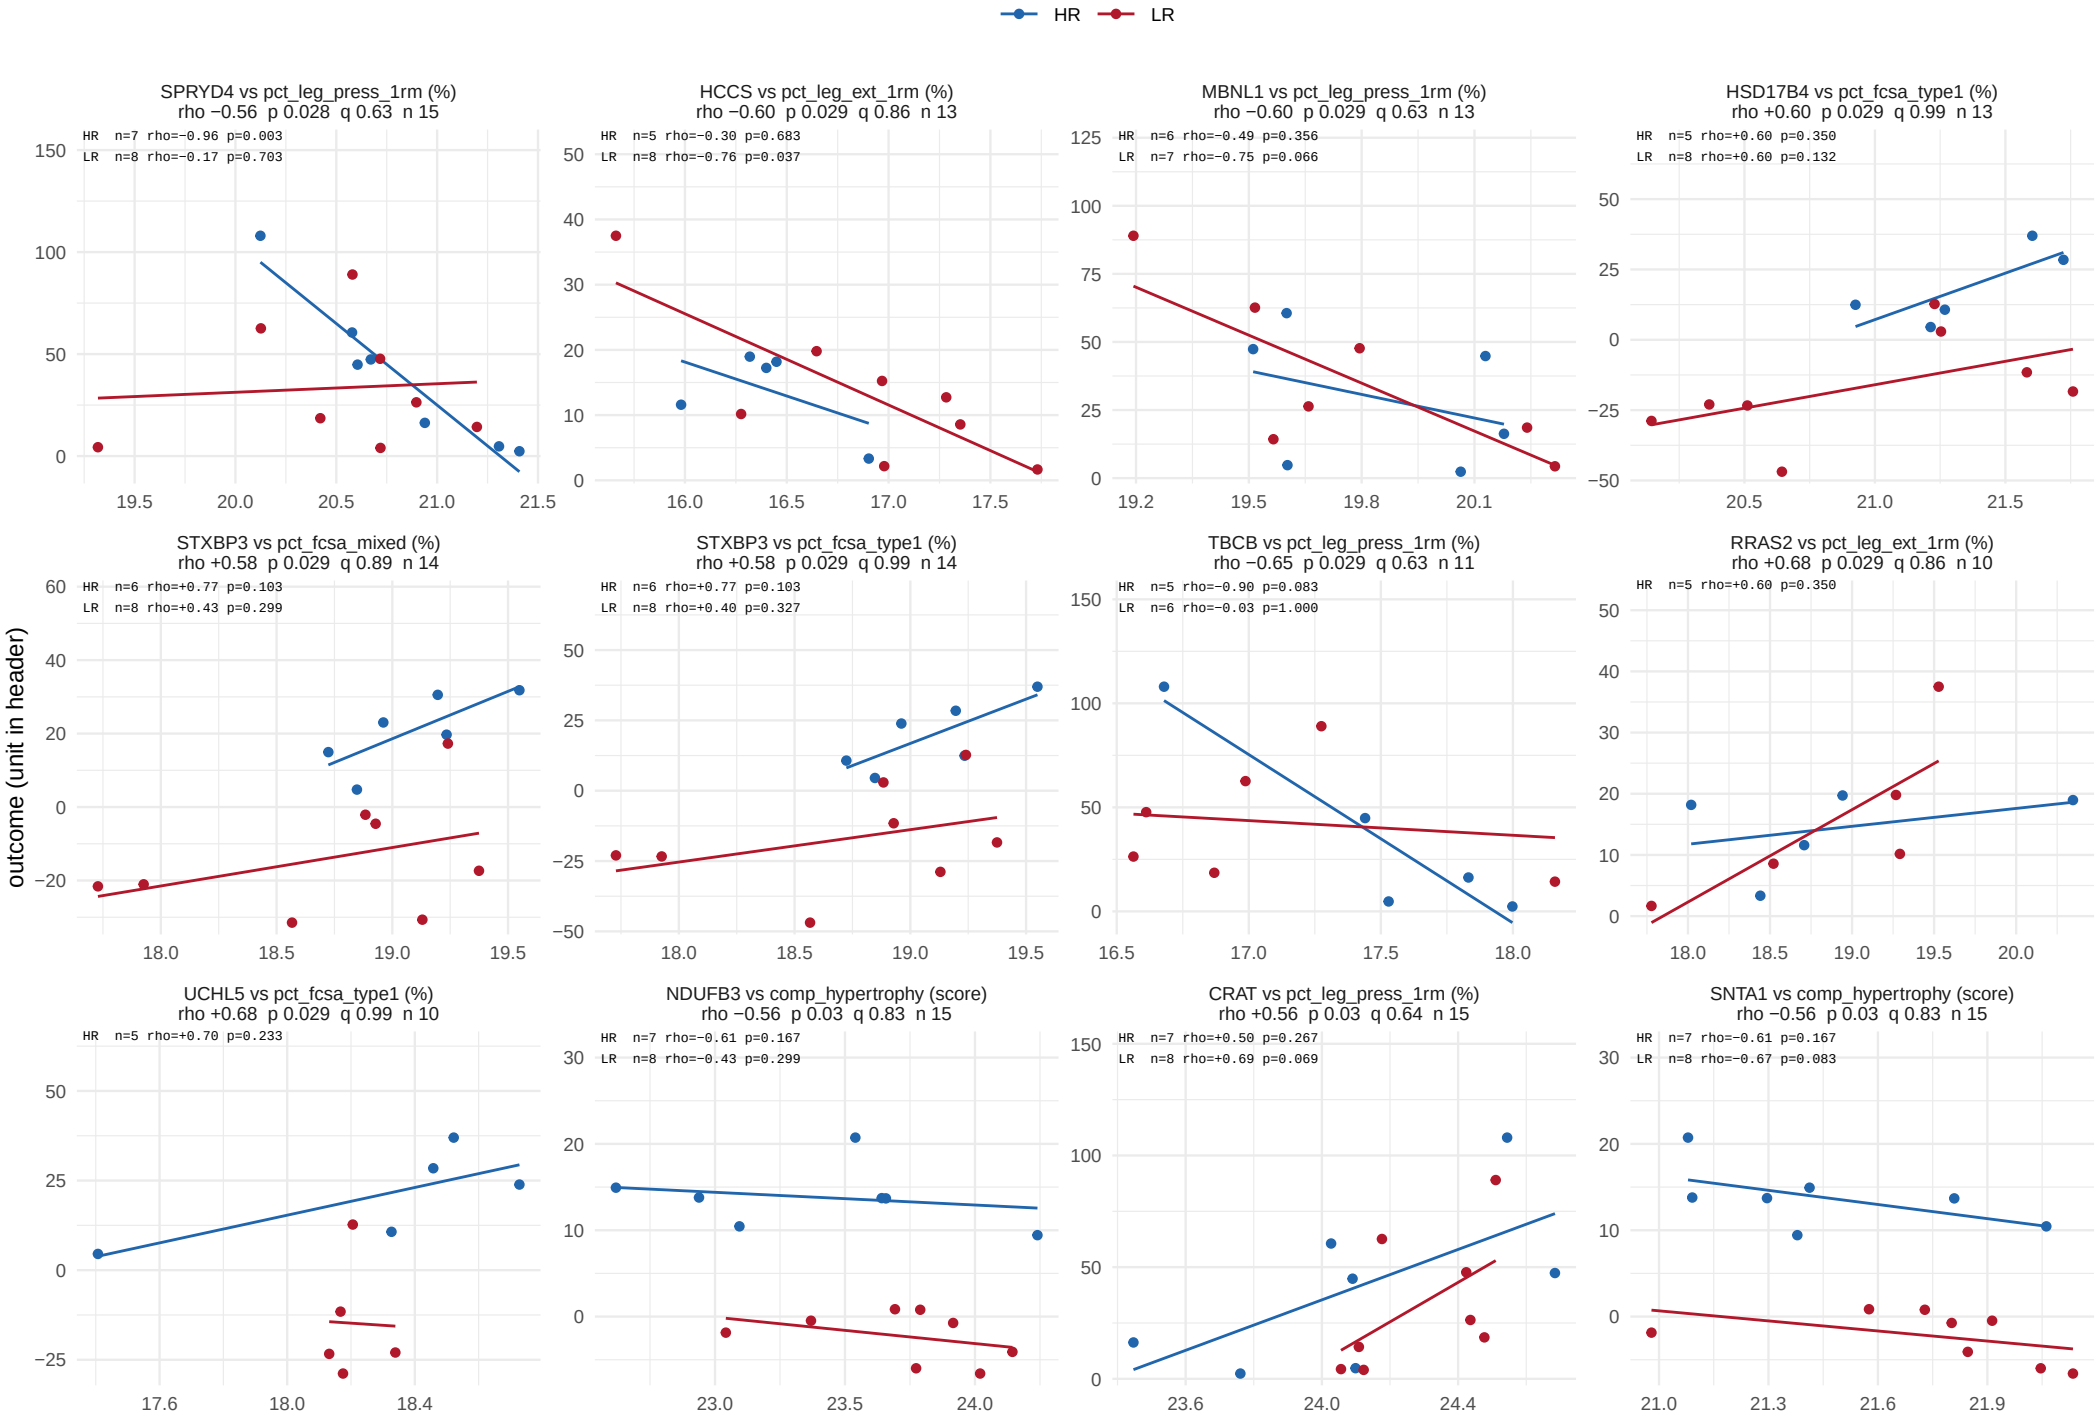

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


654 of 12553 feature−outcome pairs at p < 0.05, 8 at BH < 0.05. Page 35 of 55.

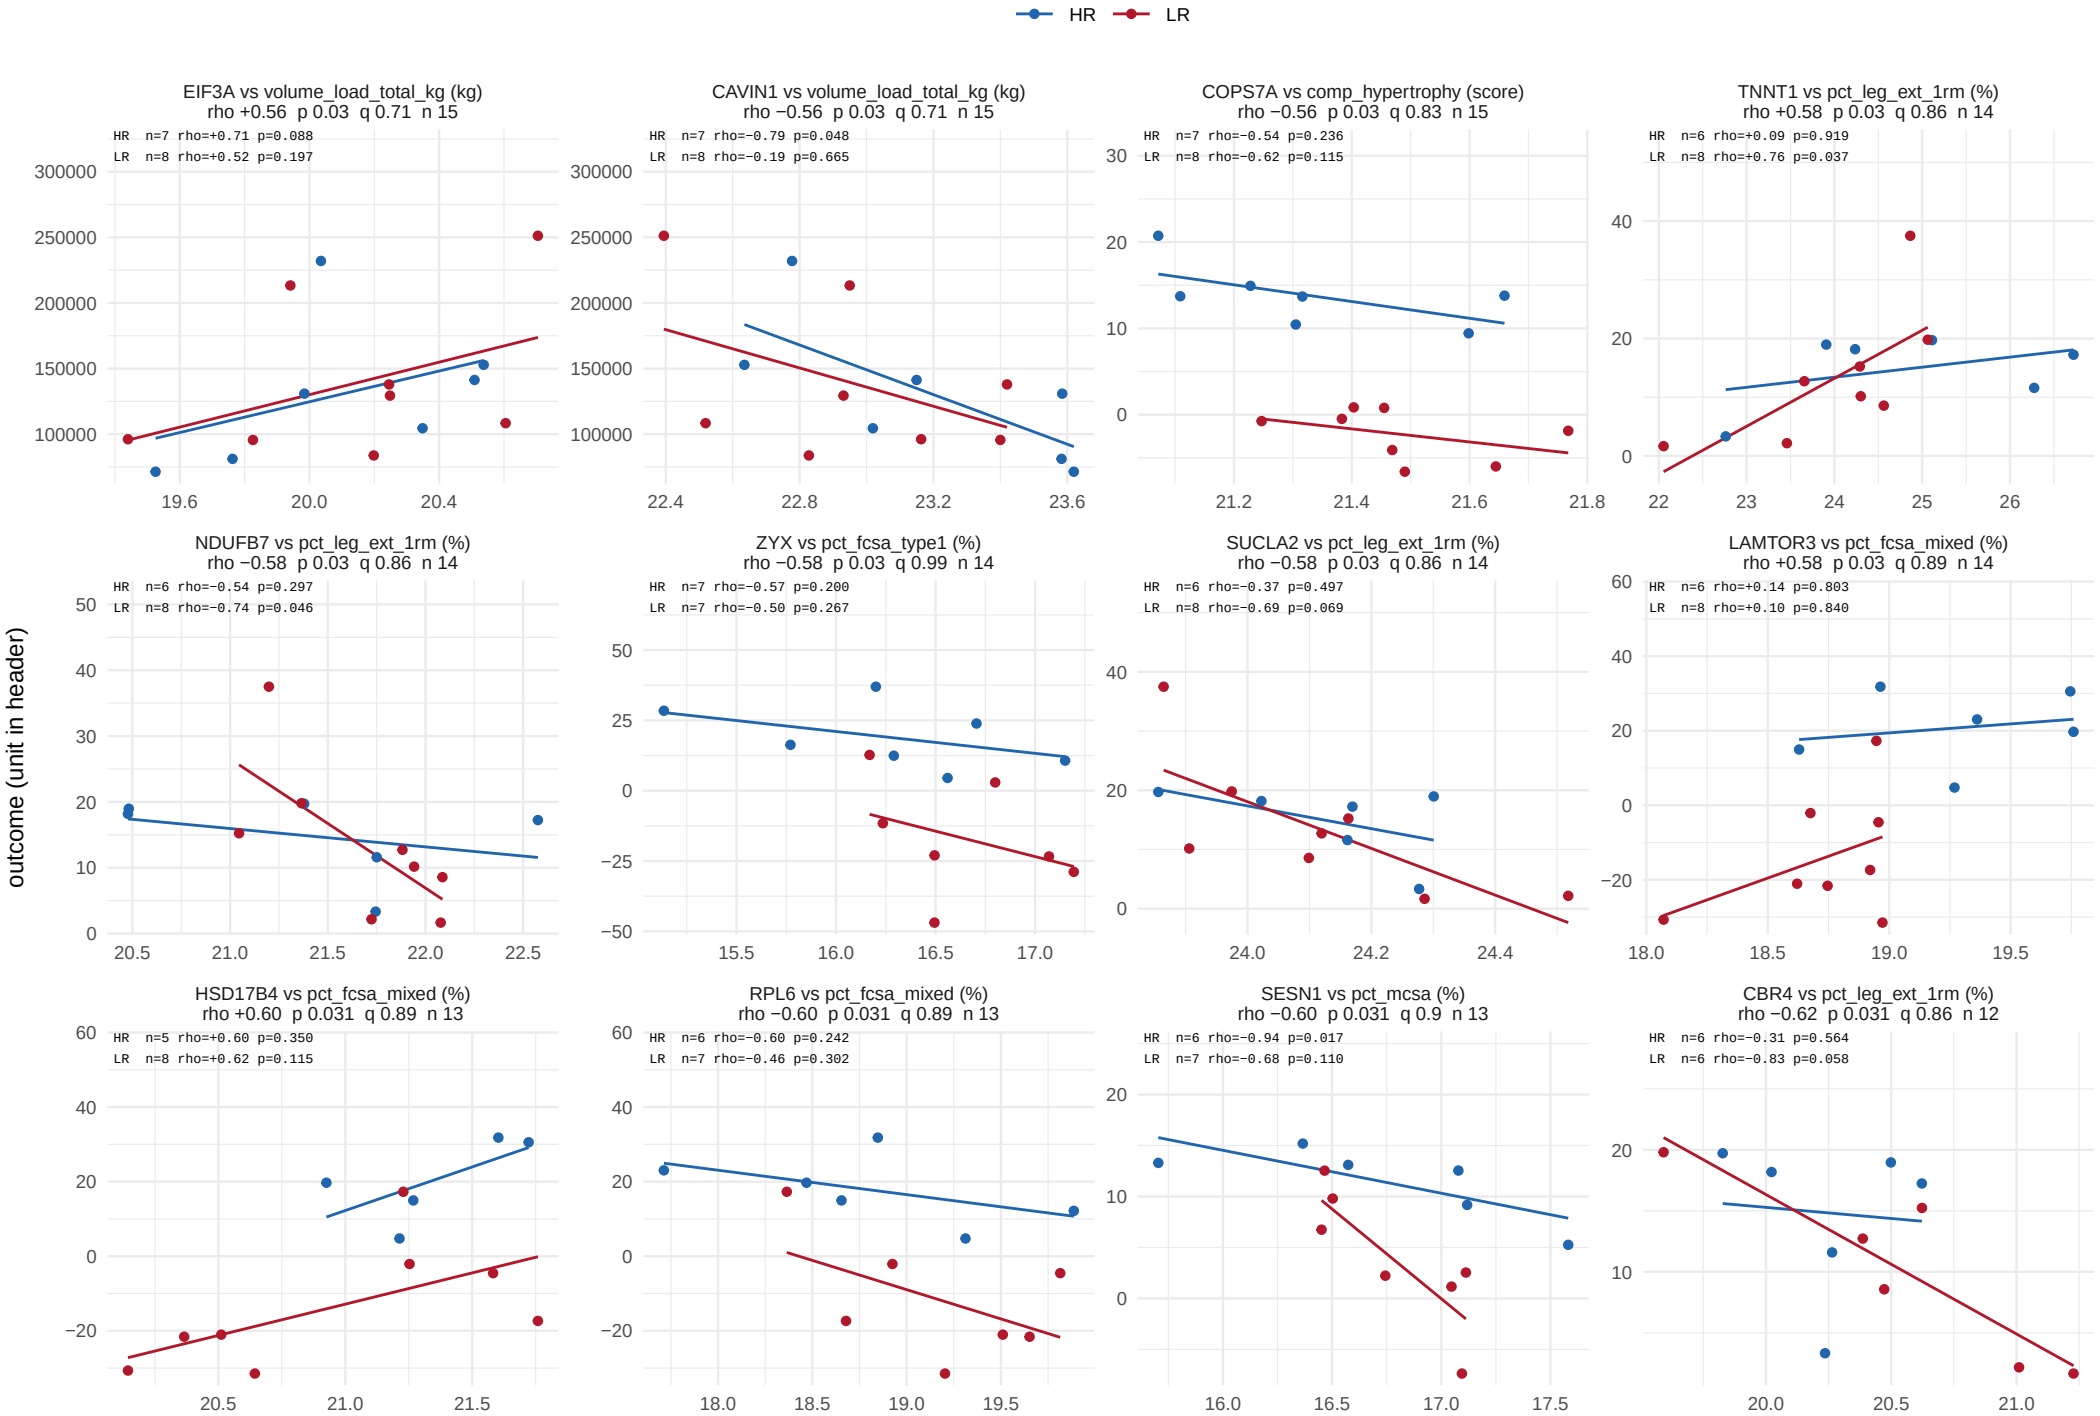

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


654 of 12553 feature−outcome pairs at p < 0.05, 8 at BH < 0.05. Page 36 of 55.

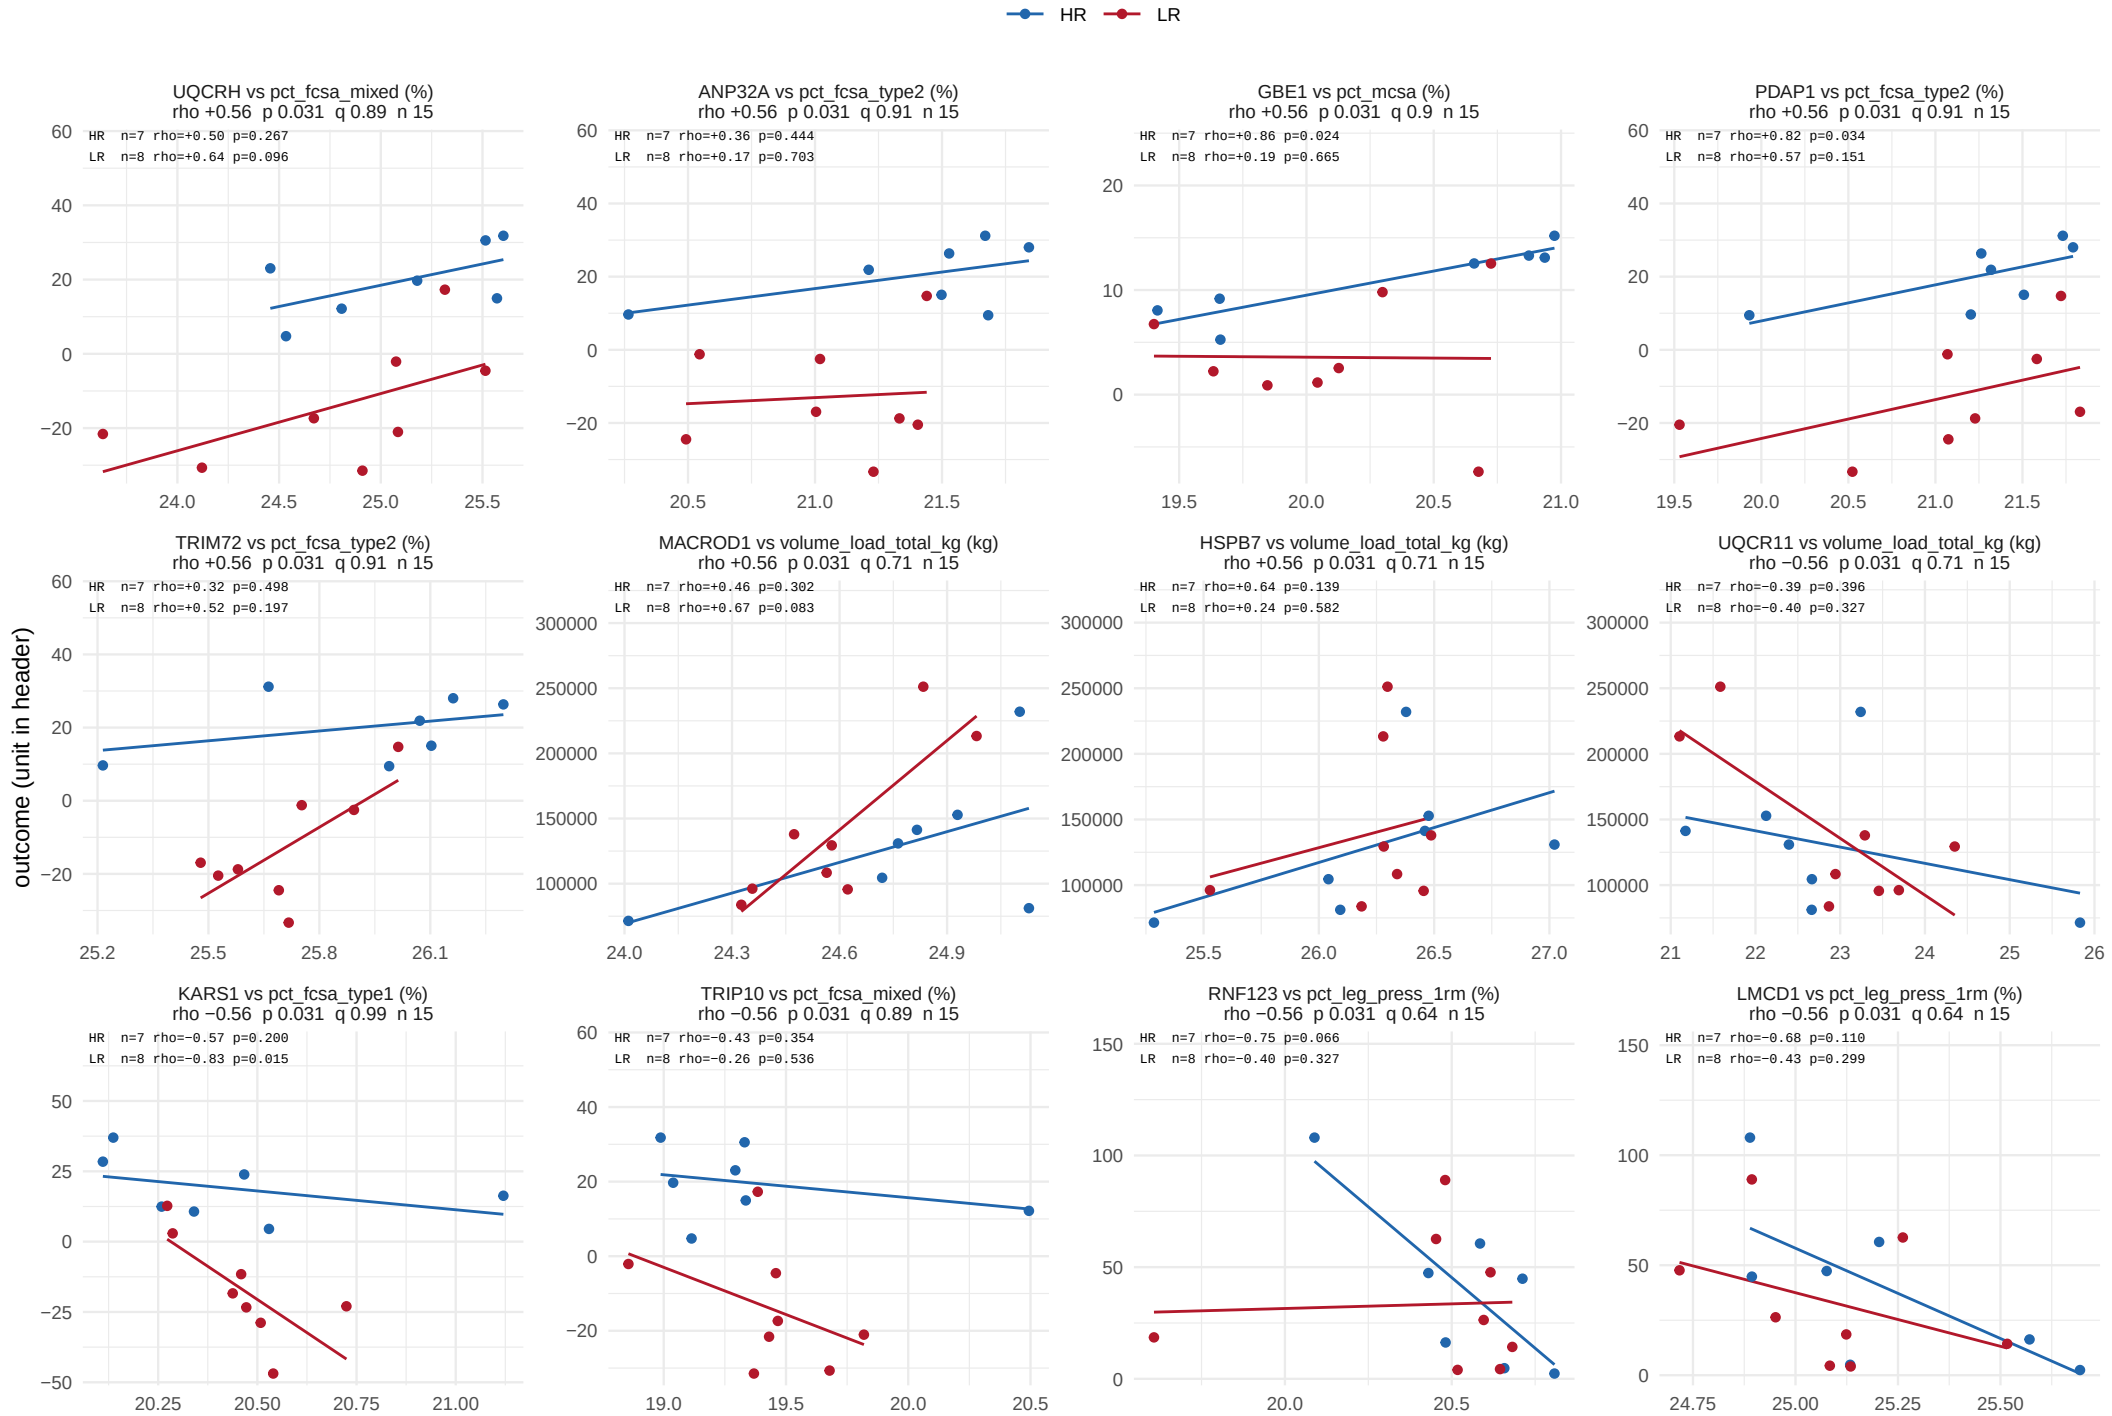

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


654 of 12553 feature−outcome pairs at p < 0.05, 8 at BH < 0.05. Page 37 of 55.

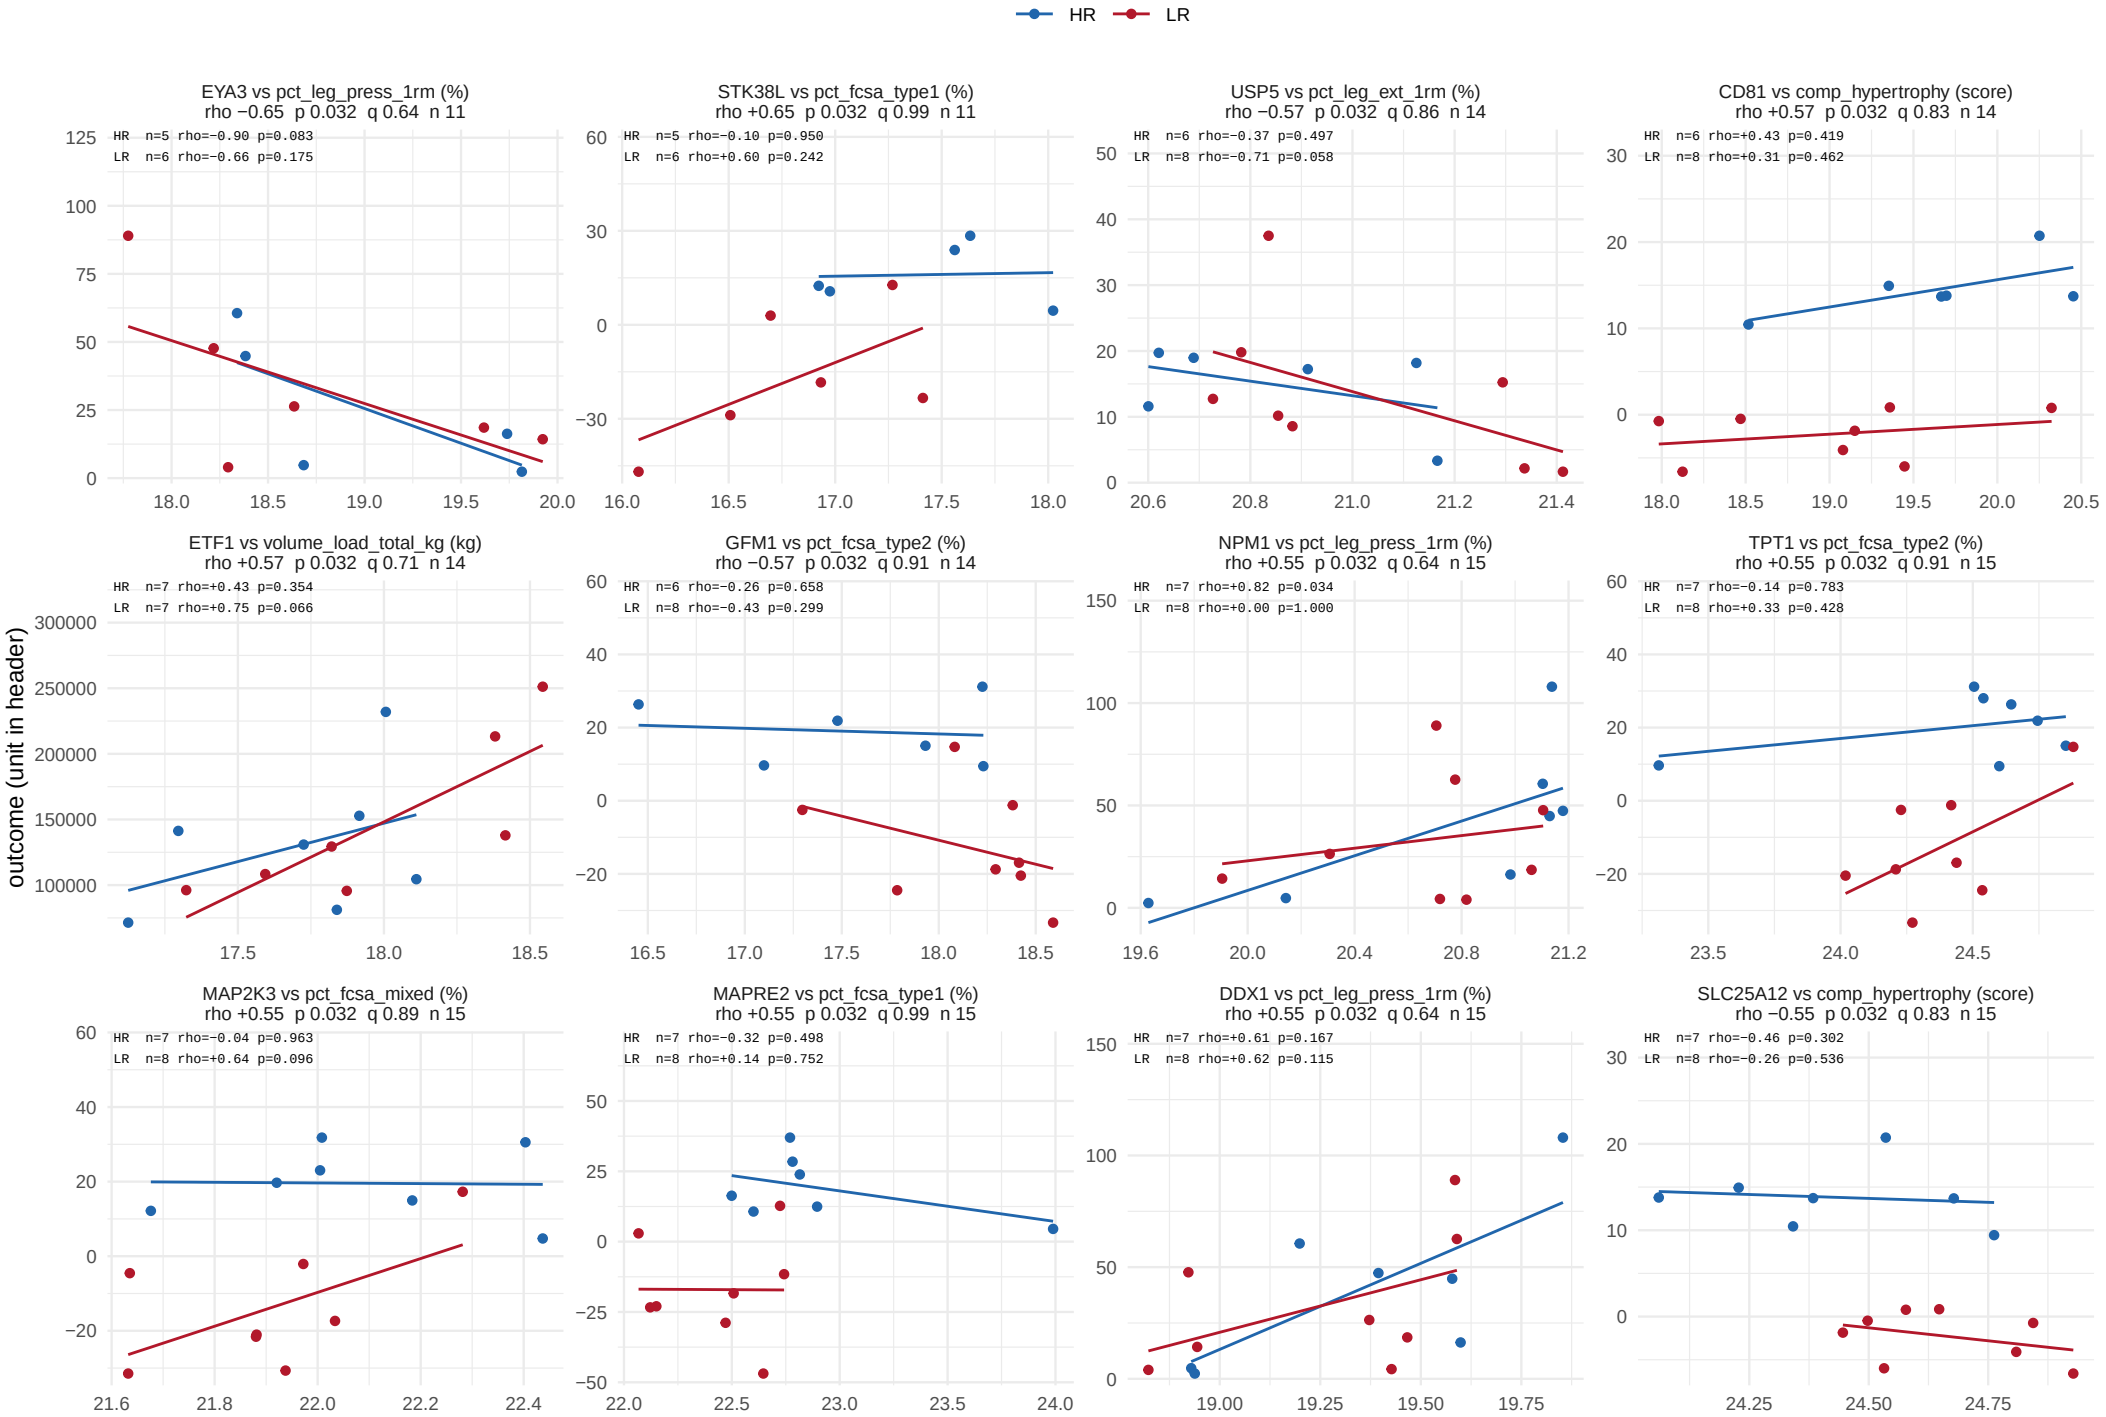

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


654 of 12553 feature−outcome pairs at p < 0.05, 8 at BH < 0.05. Page 38 of 55.

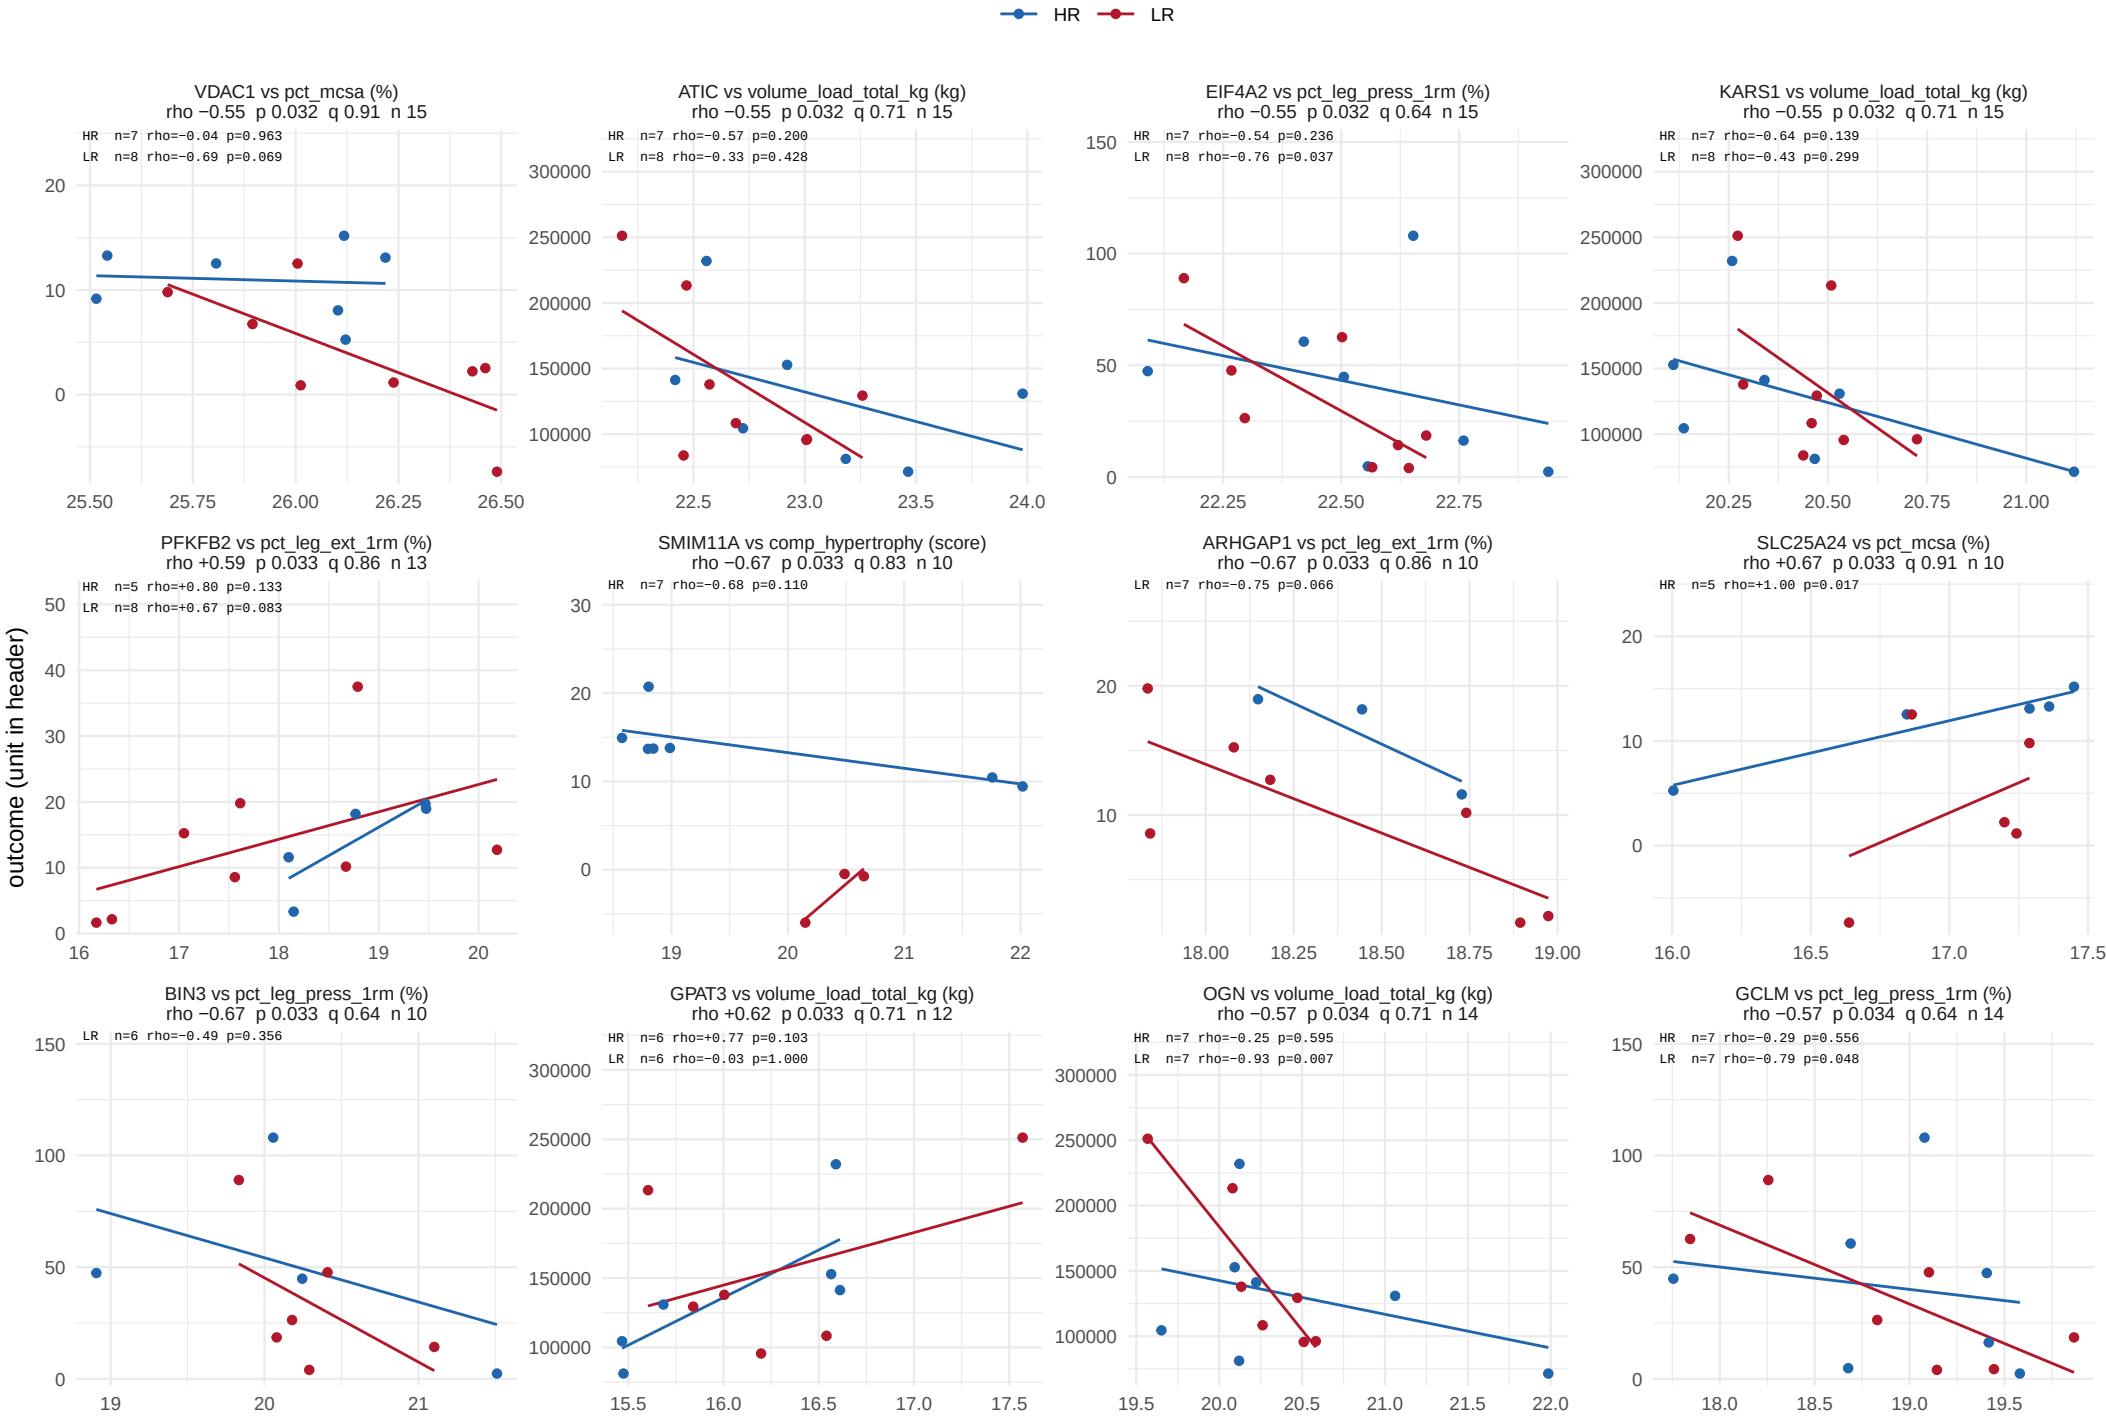

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


654 of 12553 feature−outcome pairs at p < 0.05, 8 at BH < 0.05. Page 39 of 55.

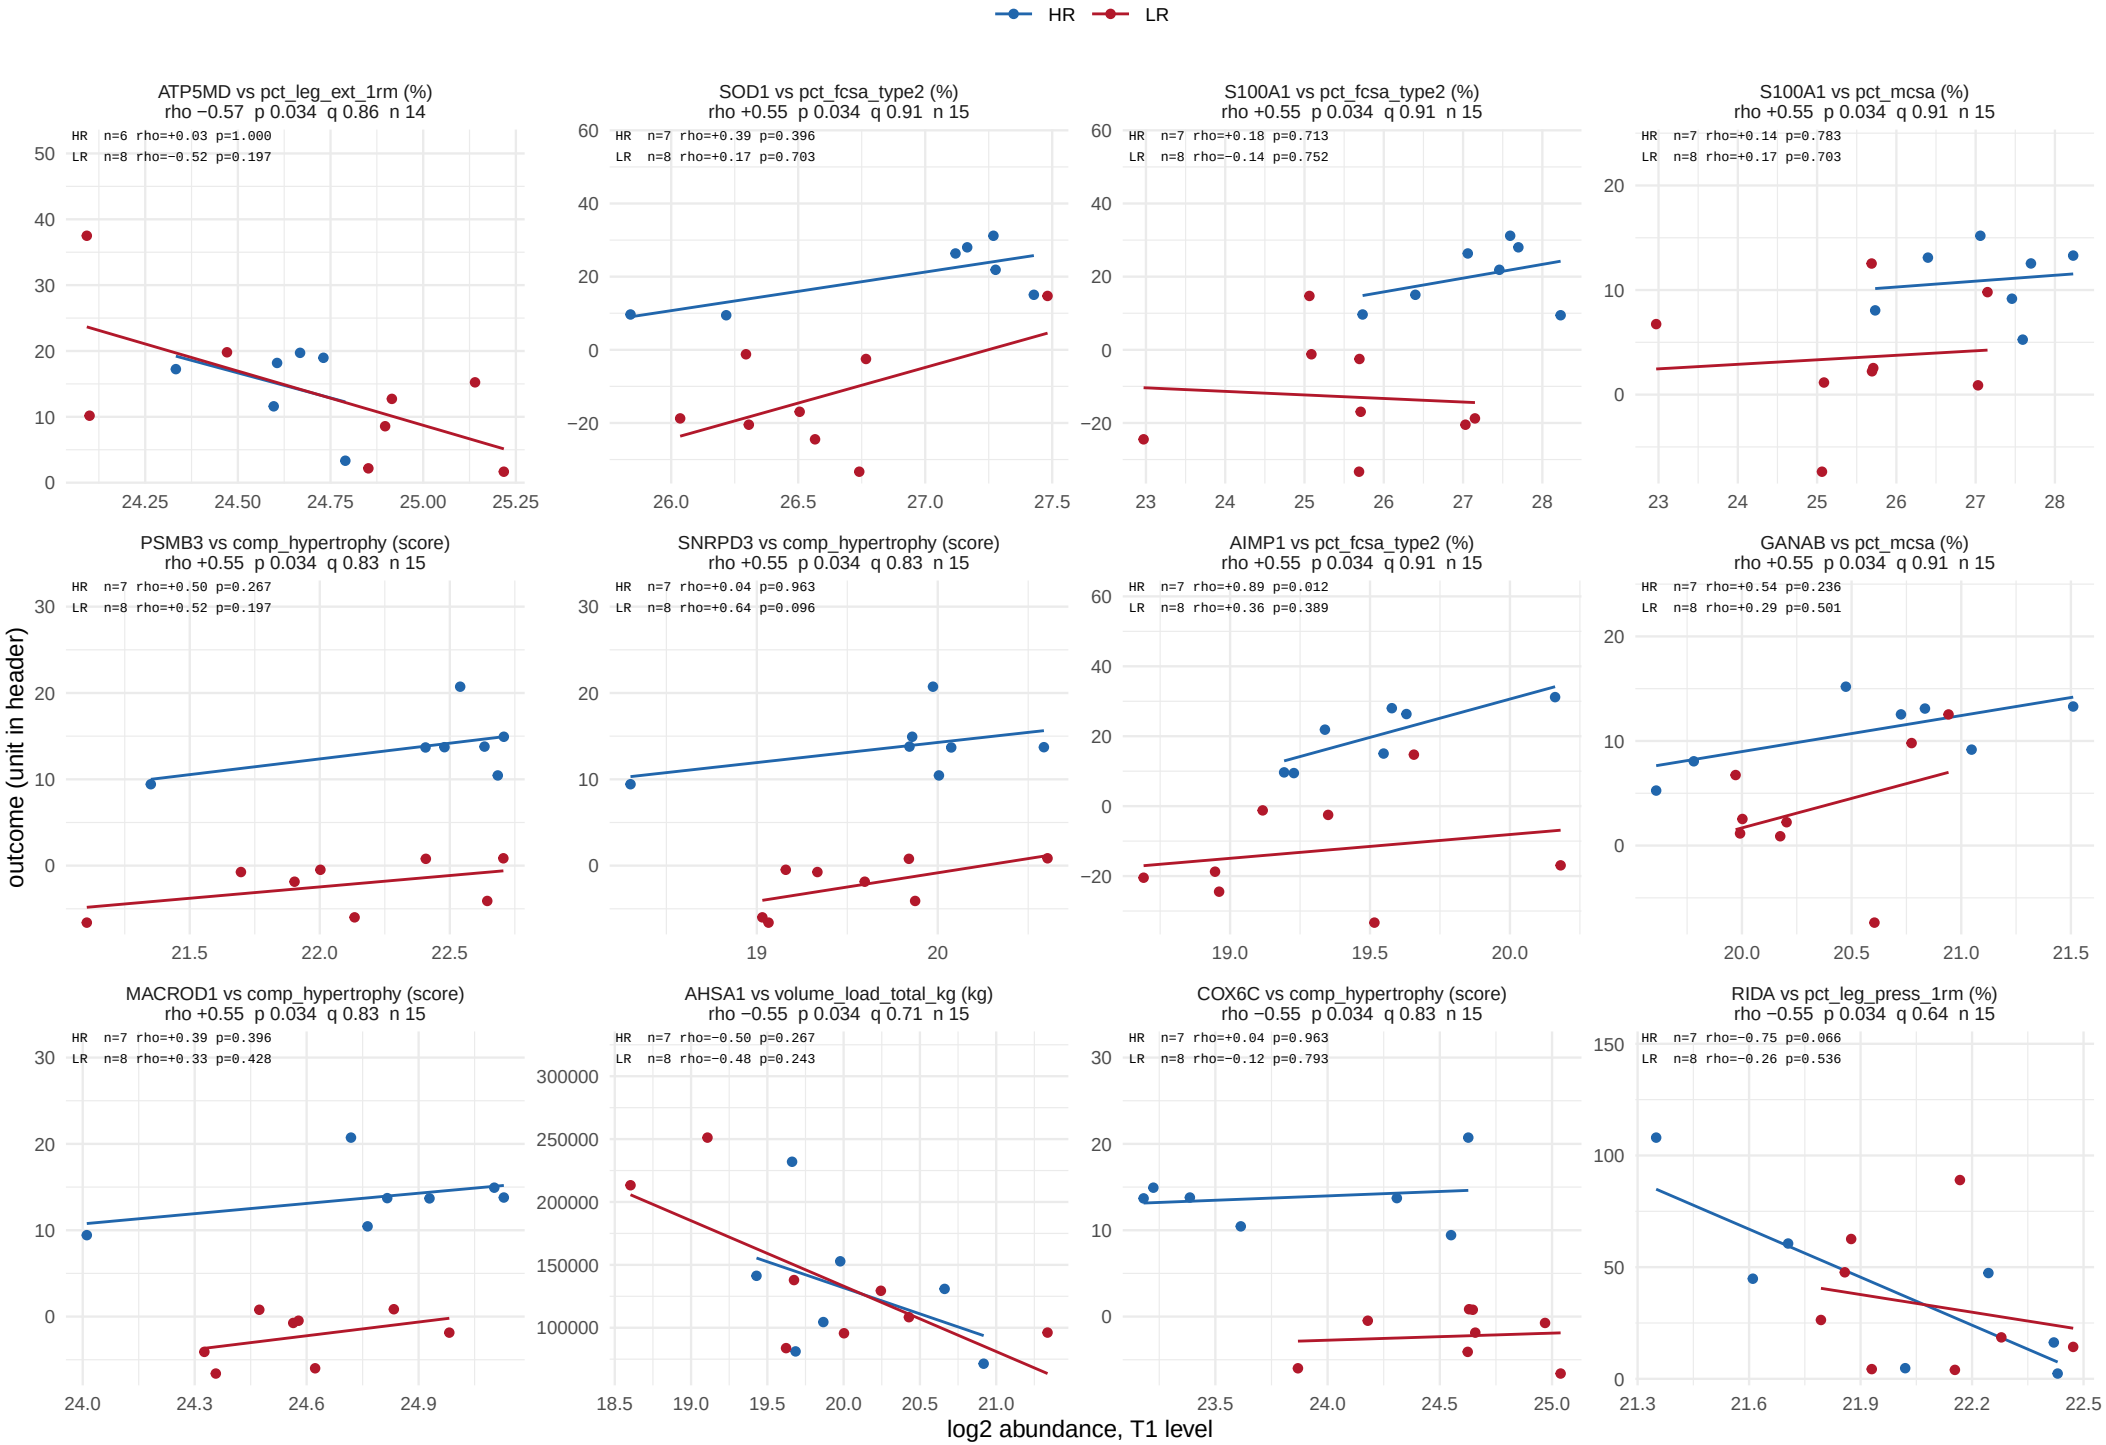

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


654 of 12553 feature−outcome pairs at p < 0.05, 8 at BH < 0.05. Page 40 of 55.

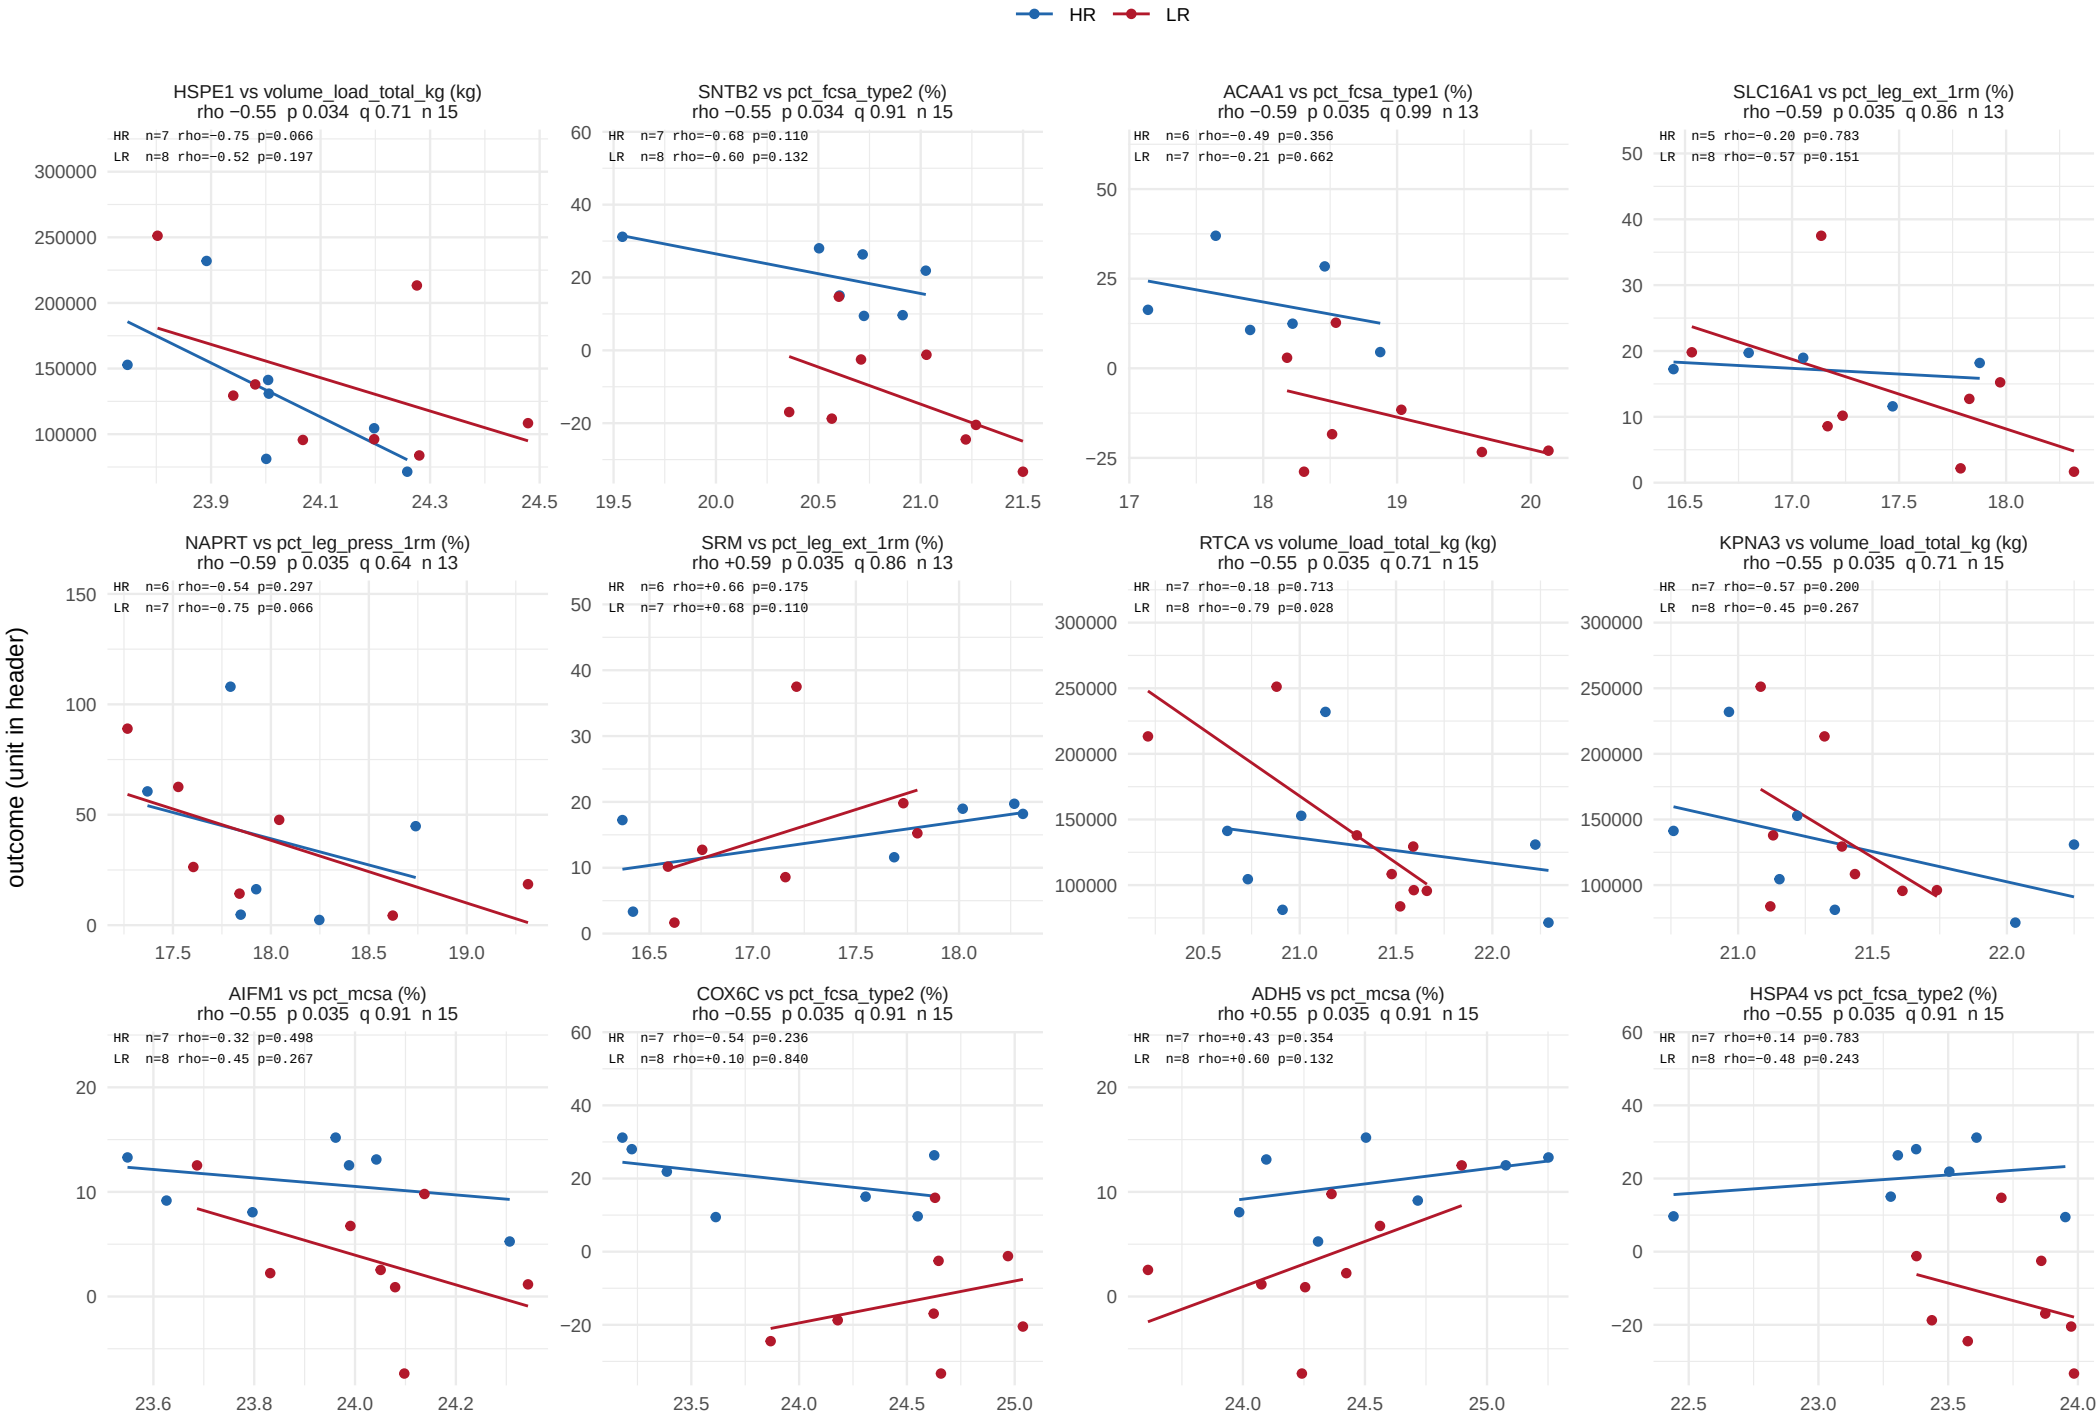

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


654 of 12553 feature−outcome pairs at p < 0.05, 8 at BH < 0.05. Page 41 of 55.

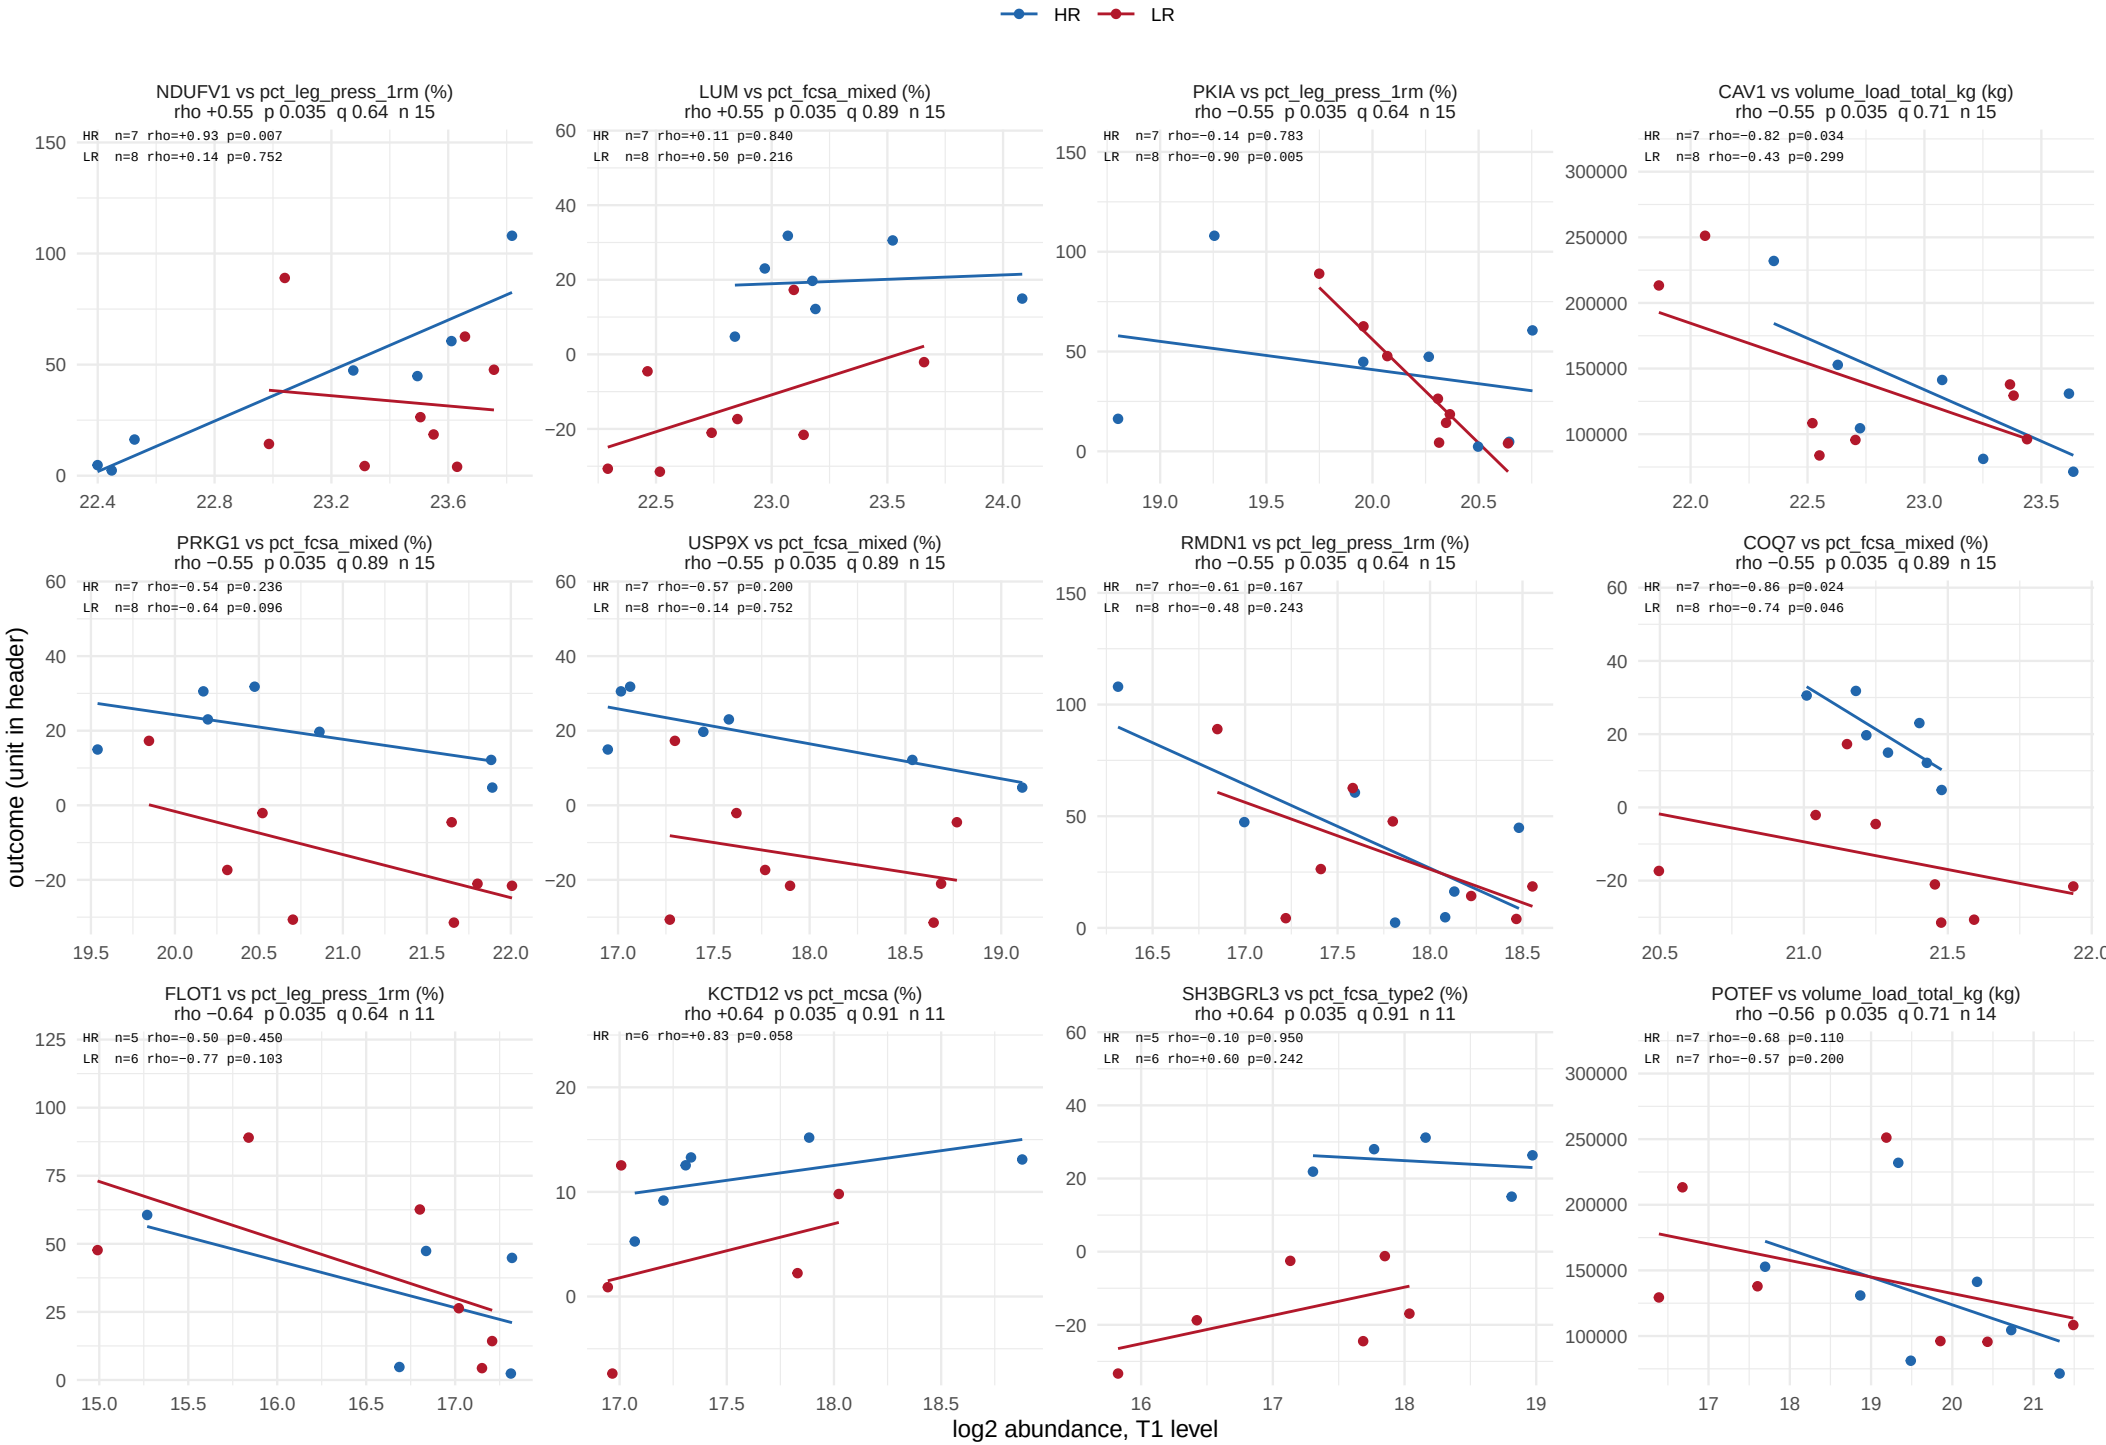

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


654 of 12553 feature−outcome pairs at p < 0.05, 8 at BH < 0.05. Page 42 of 55.

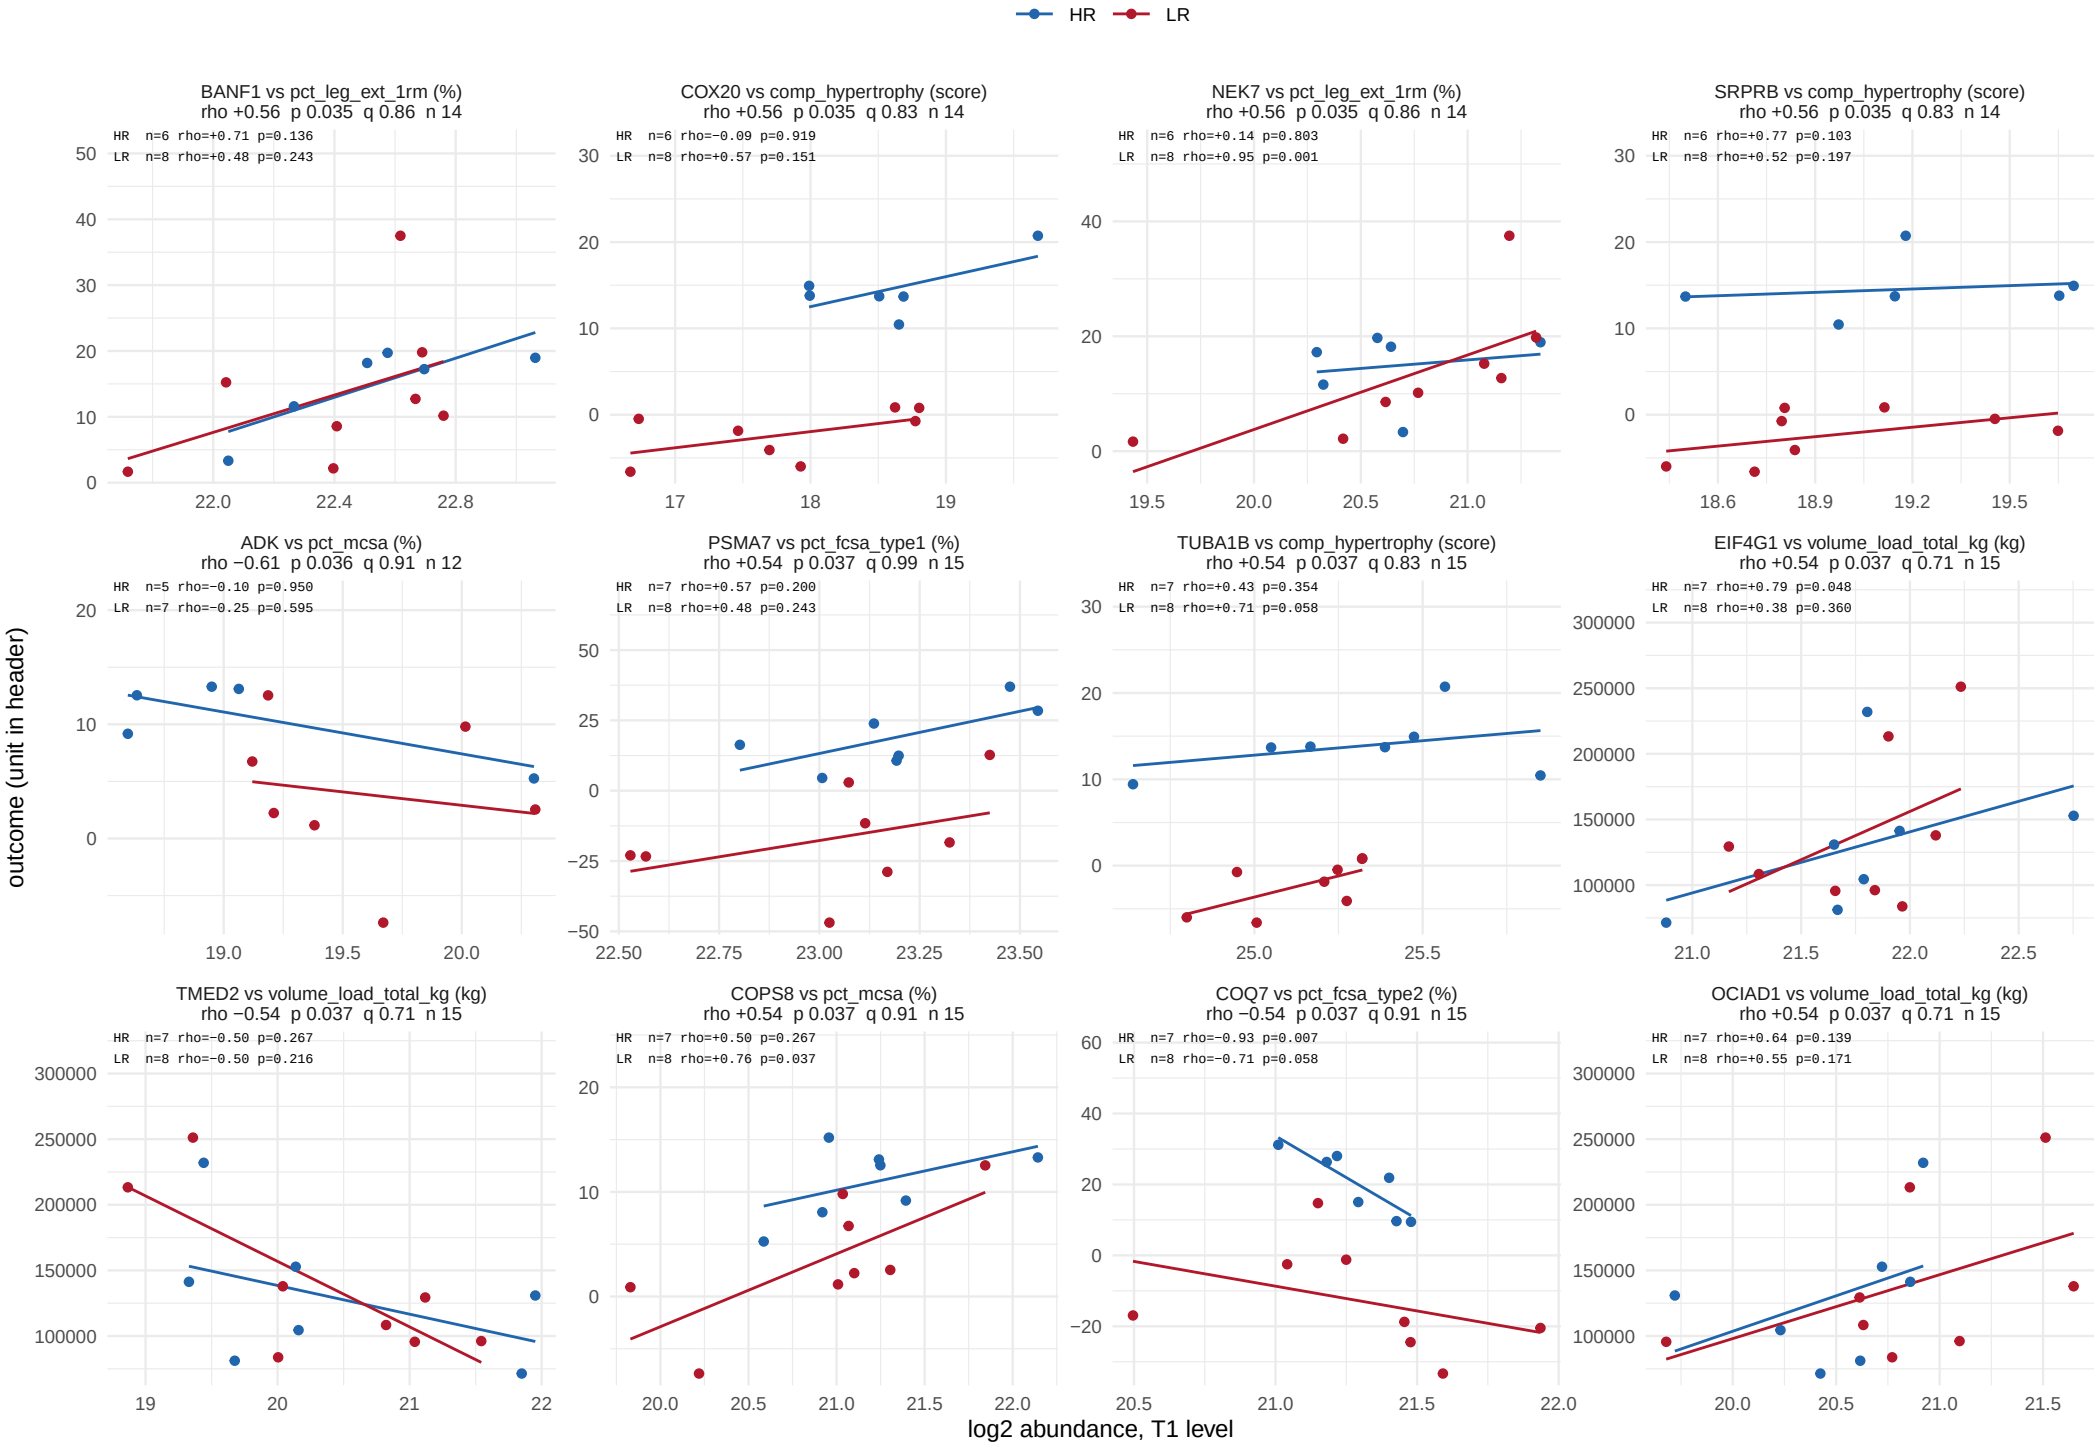

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


654 of 12553 feature−outcome pairs at p < 0.05, 8 at BH < 0.05. Page 43 of 55.

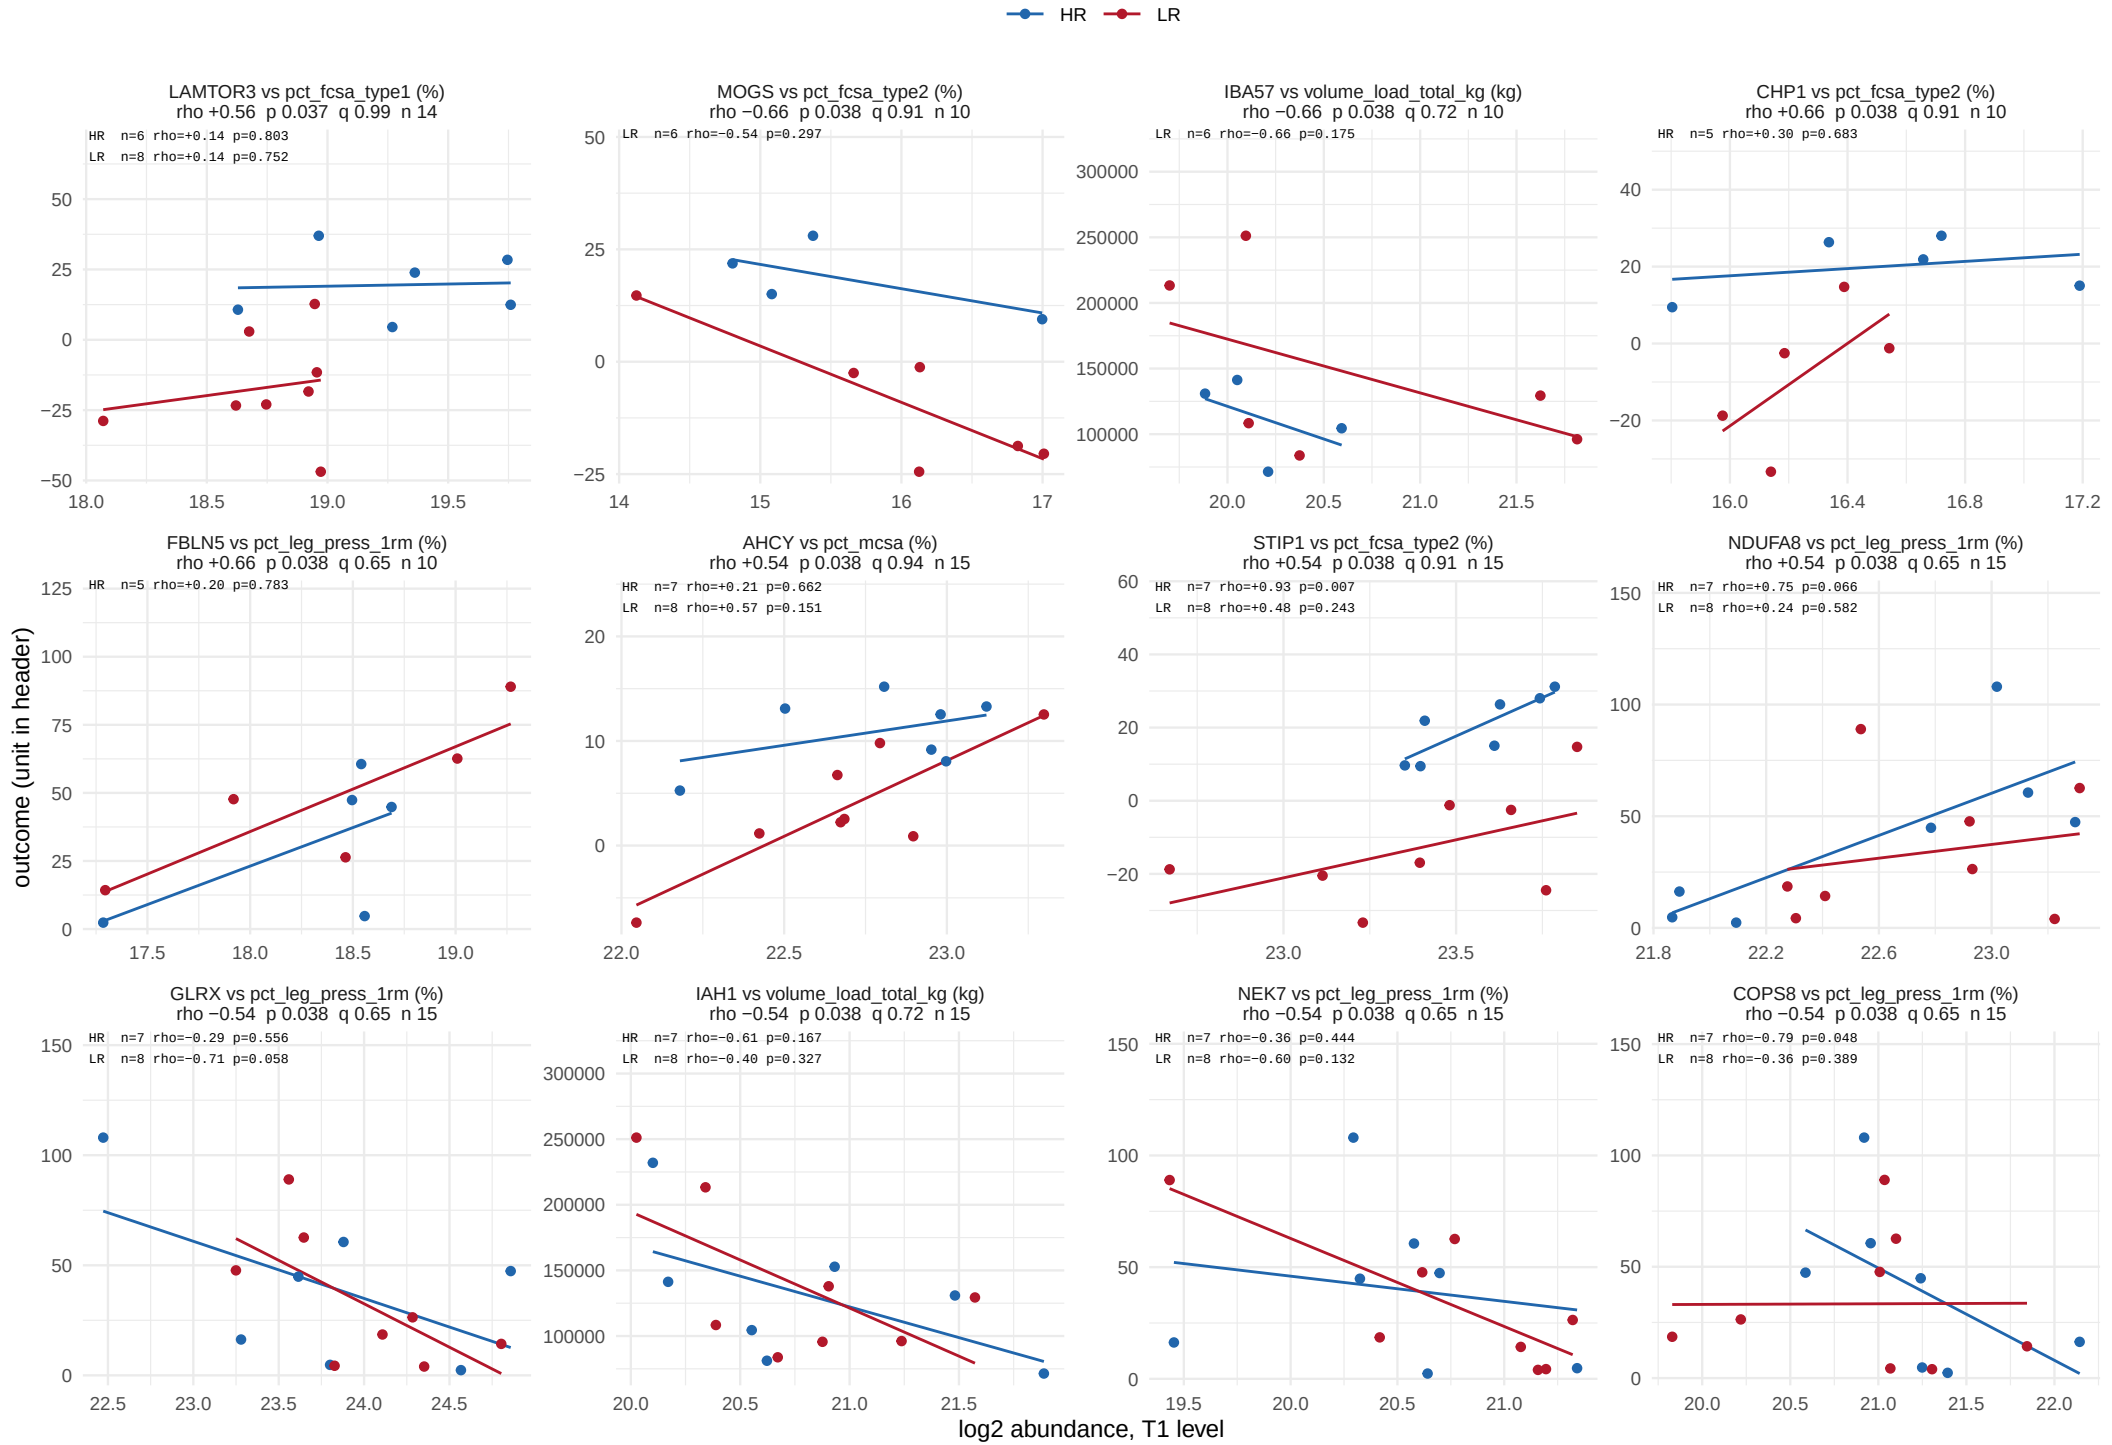

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


654 of 12553 feature−outcome pairs at p < 0.05, 8 at BH < 0.05. Page 44 of 55.

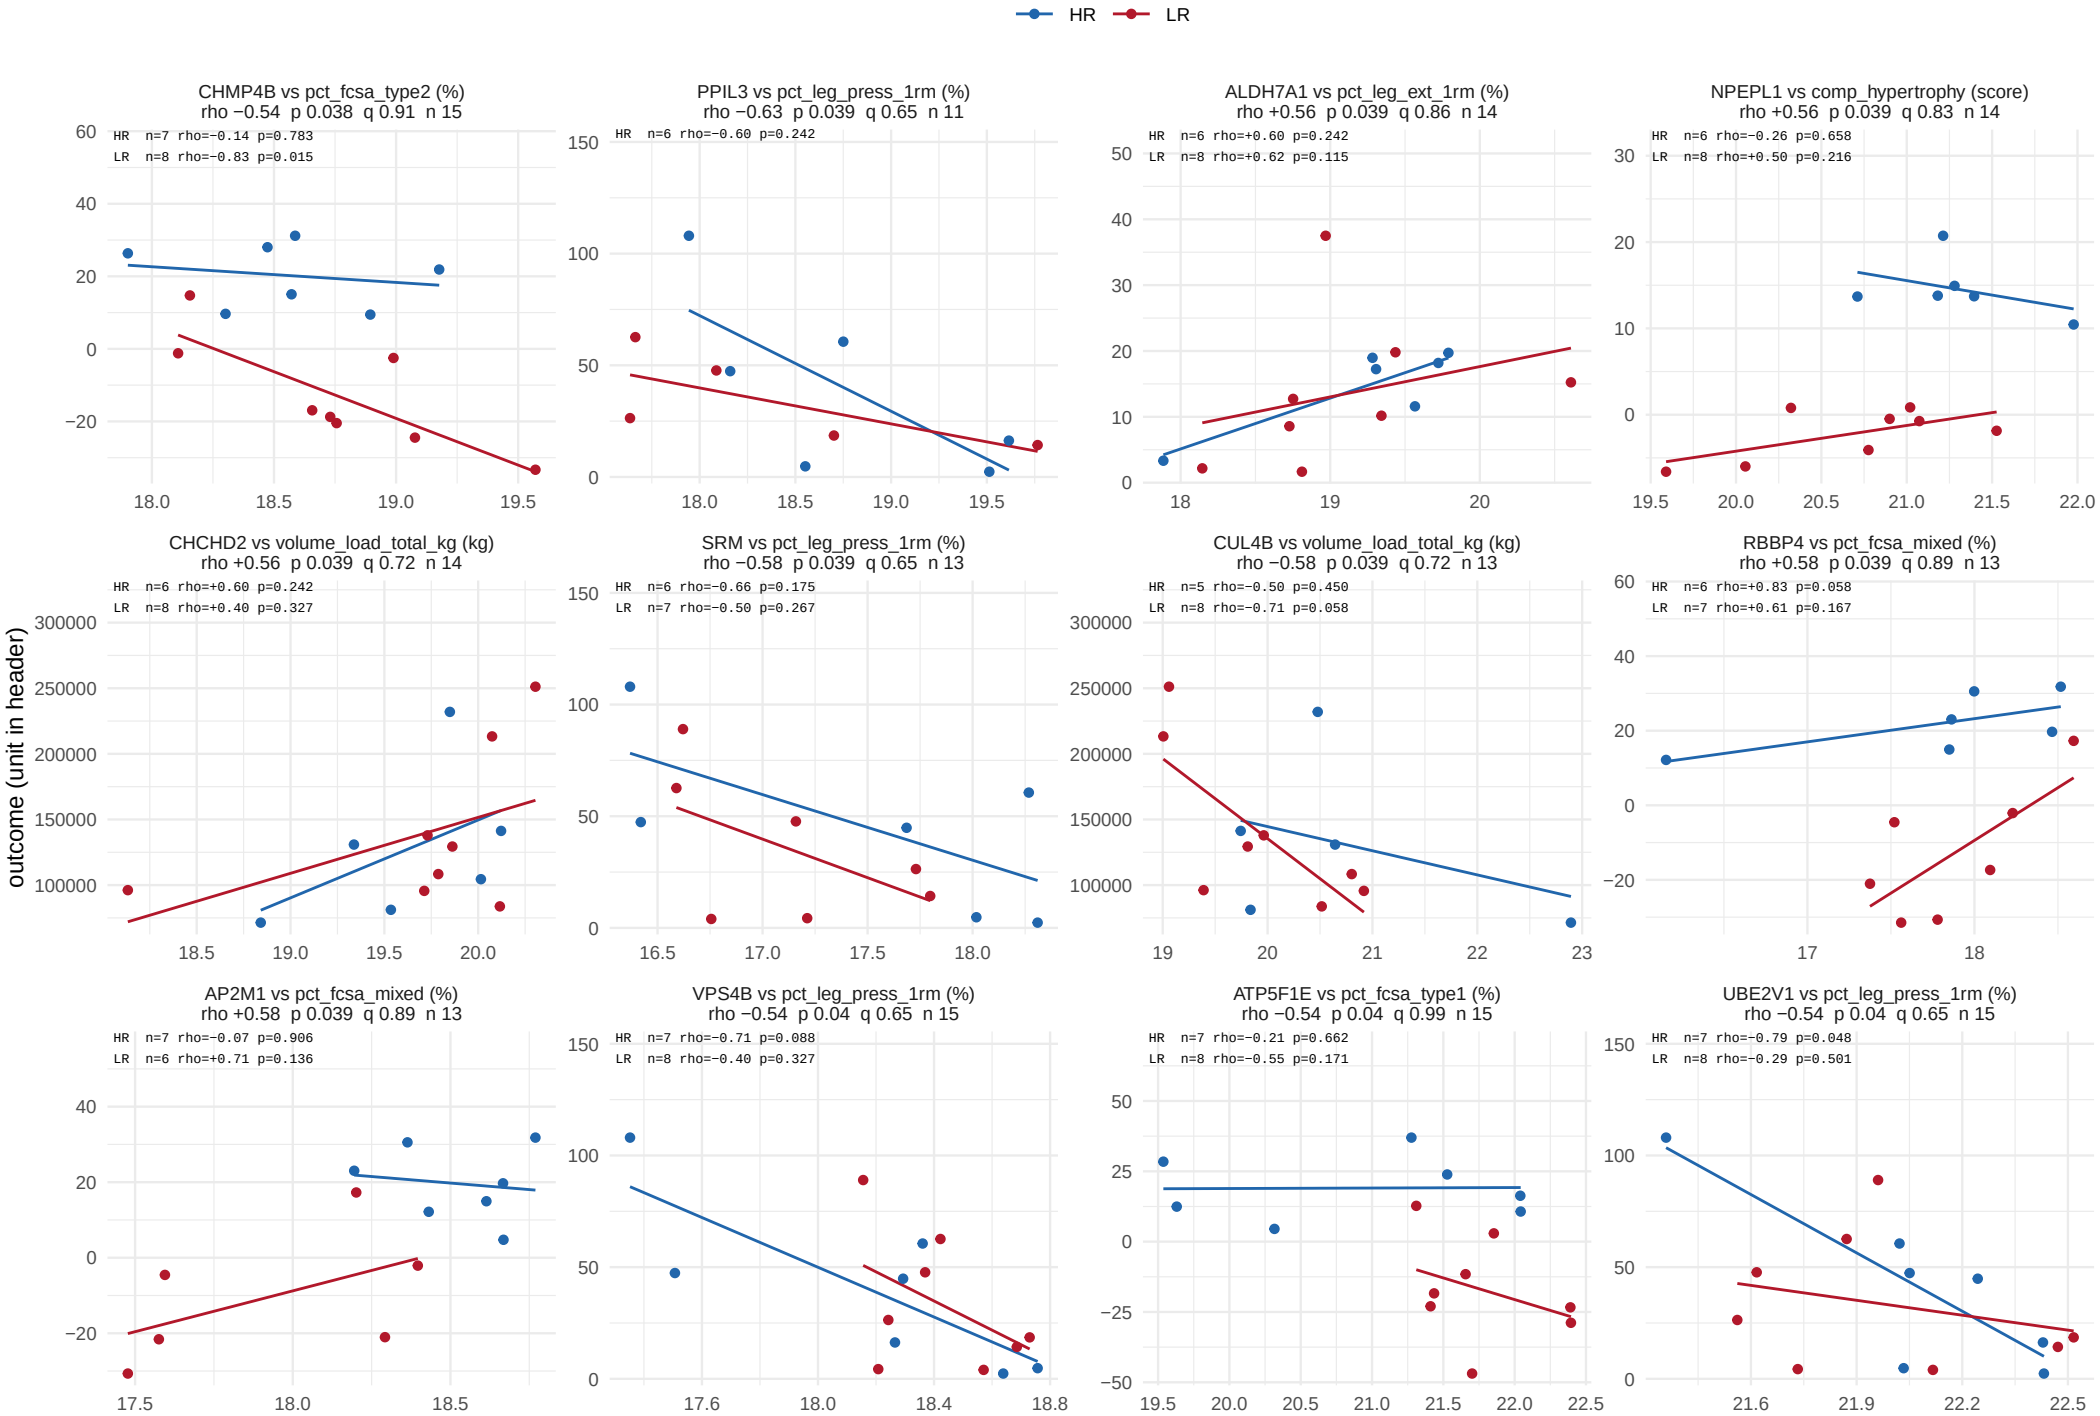

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


654 of 12553 feature−outcome pairs at p < 0.05, 8 at BH < 0.05. Page 45 of 55.

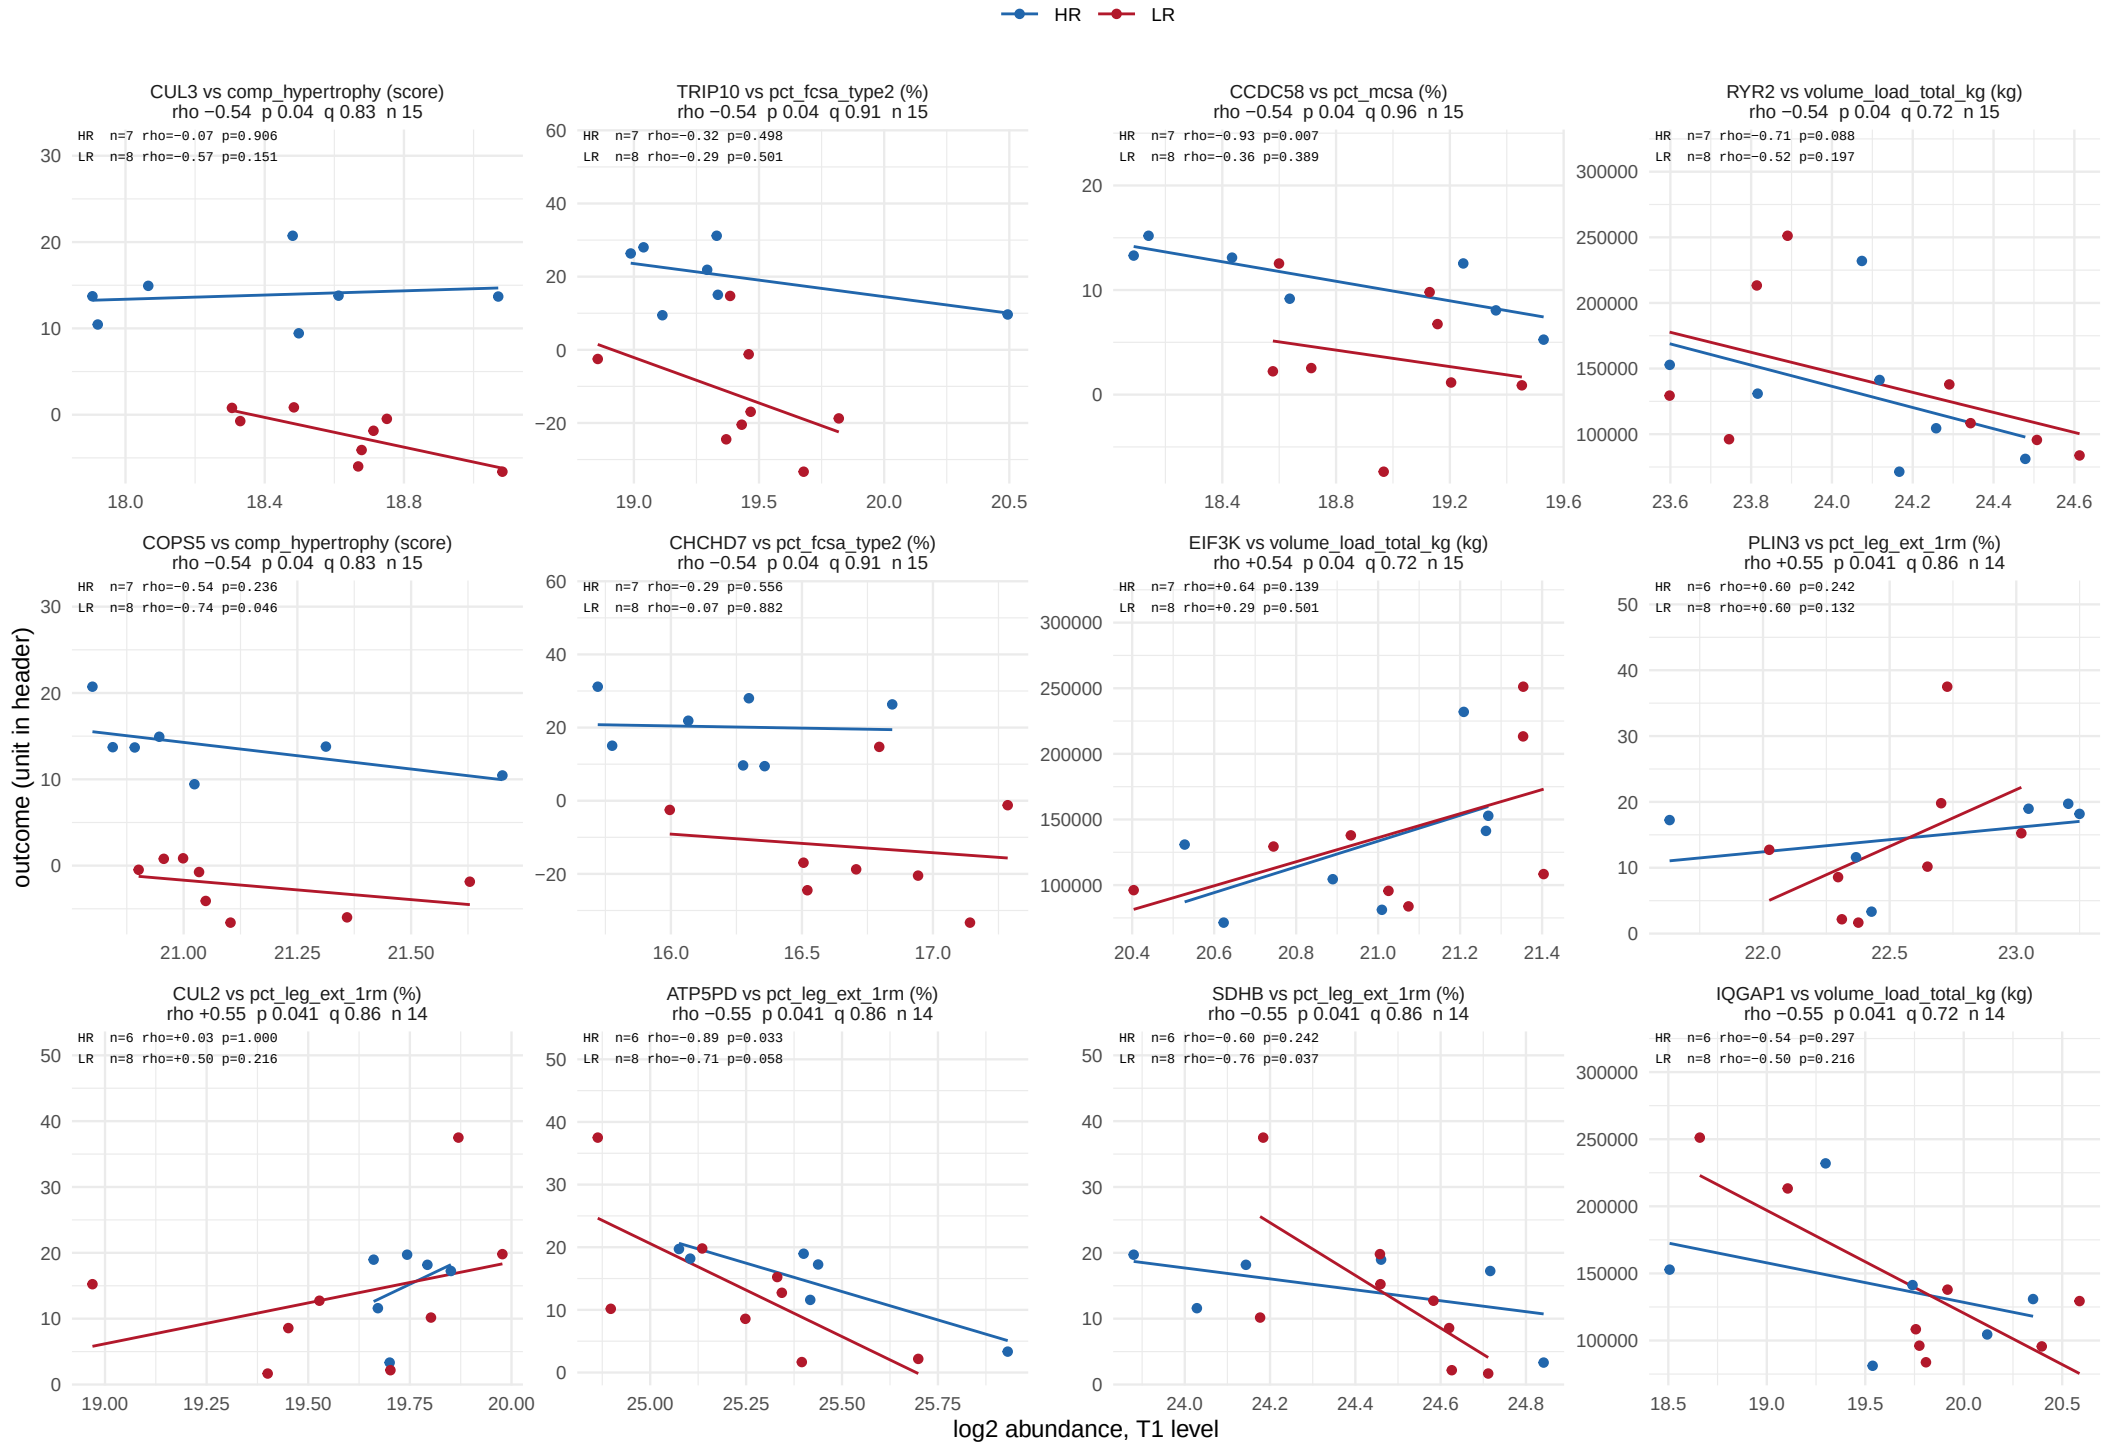

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


654 of 12553 feature−outcome pairs at p < 0.05, 8 at BH < 0.05. Page 46 of 55.

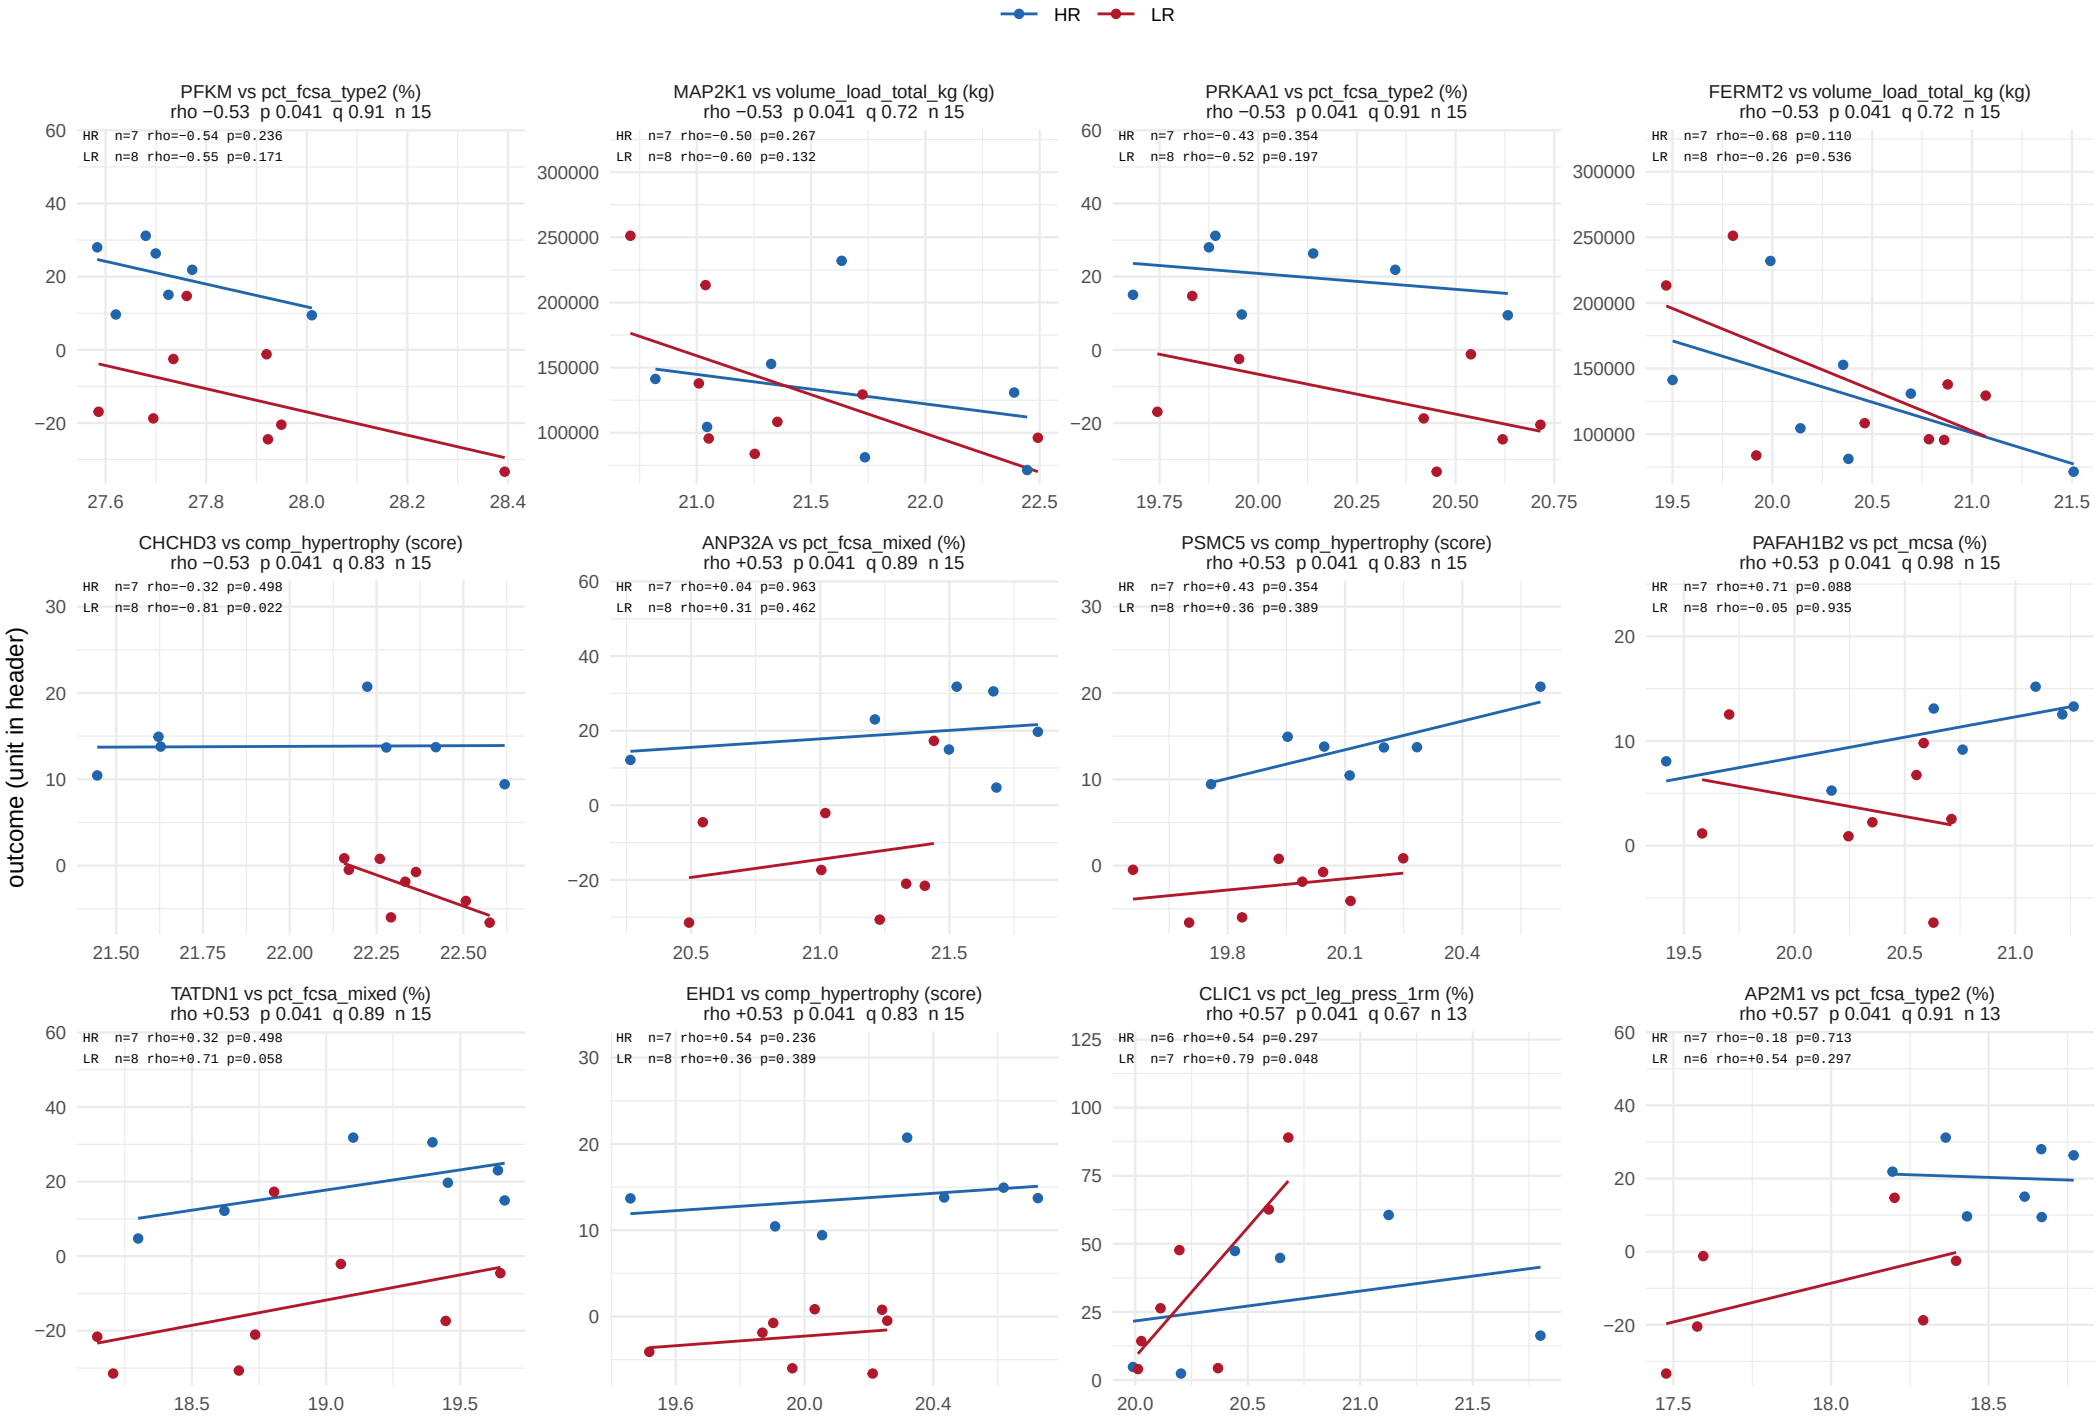

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


654 of 12553 feature−outcome pairs at p < 0.05, 8 at BH < 0.05. Page 47 of 55.

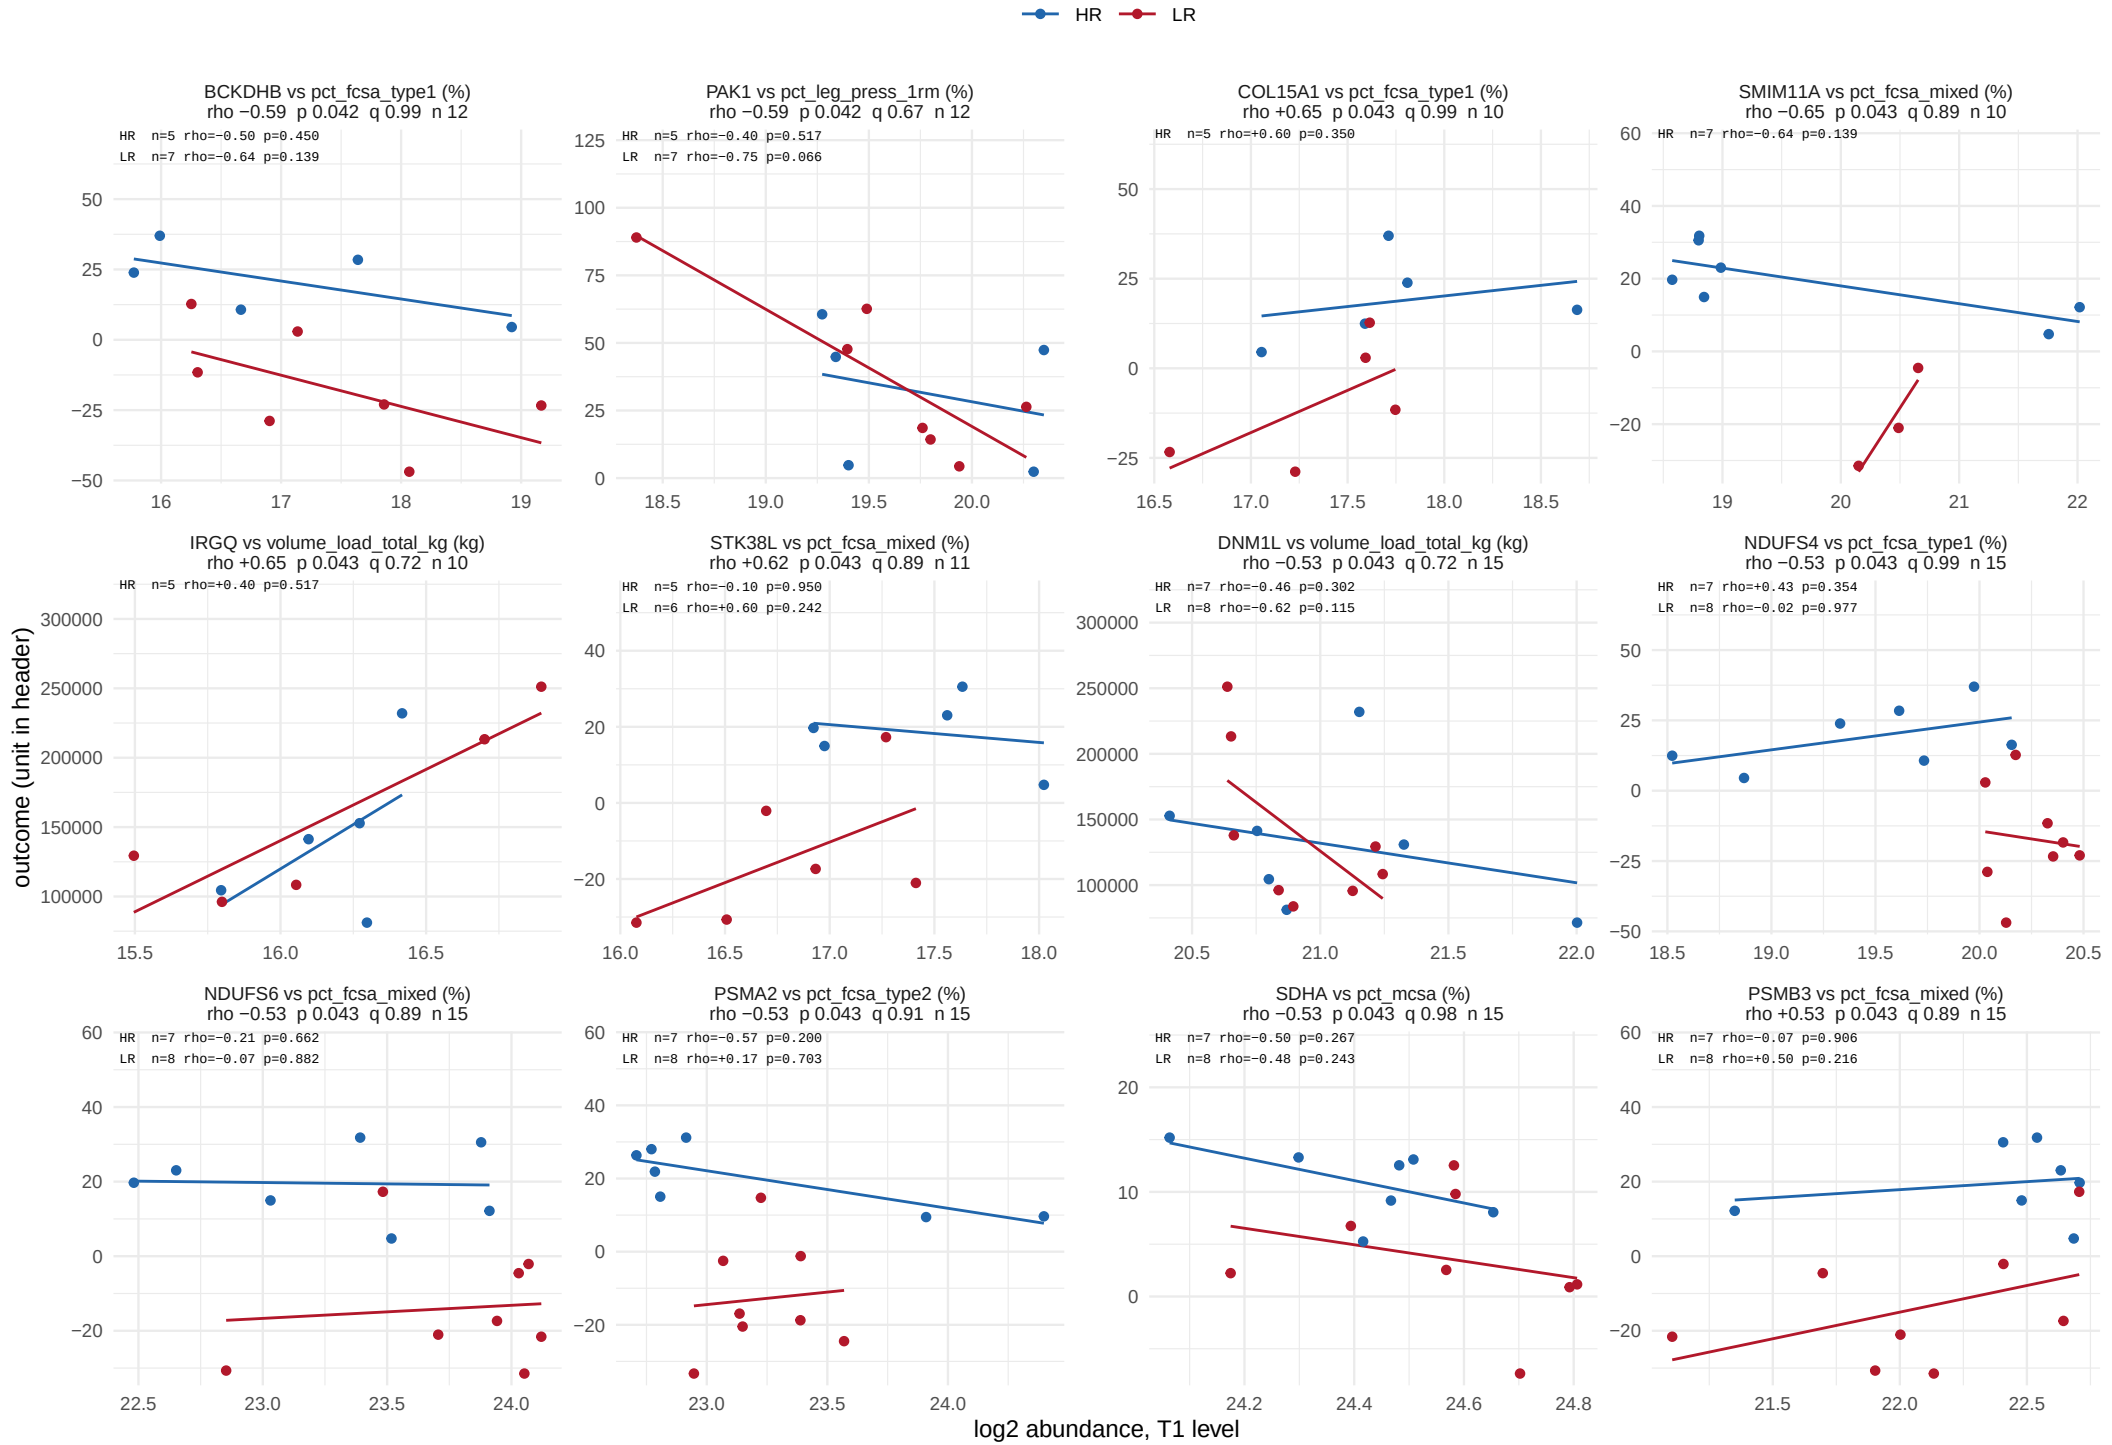

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


654 of 12553 feature−outcome pairs at p < 0.05, 8 at BH < 0.05. Page 48 of 55.

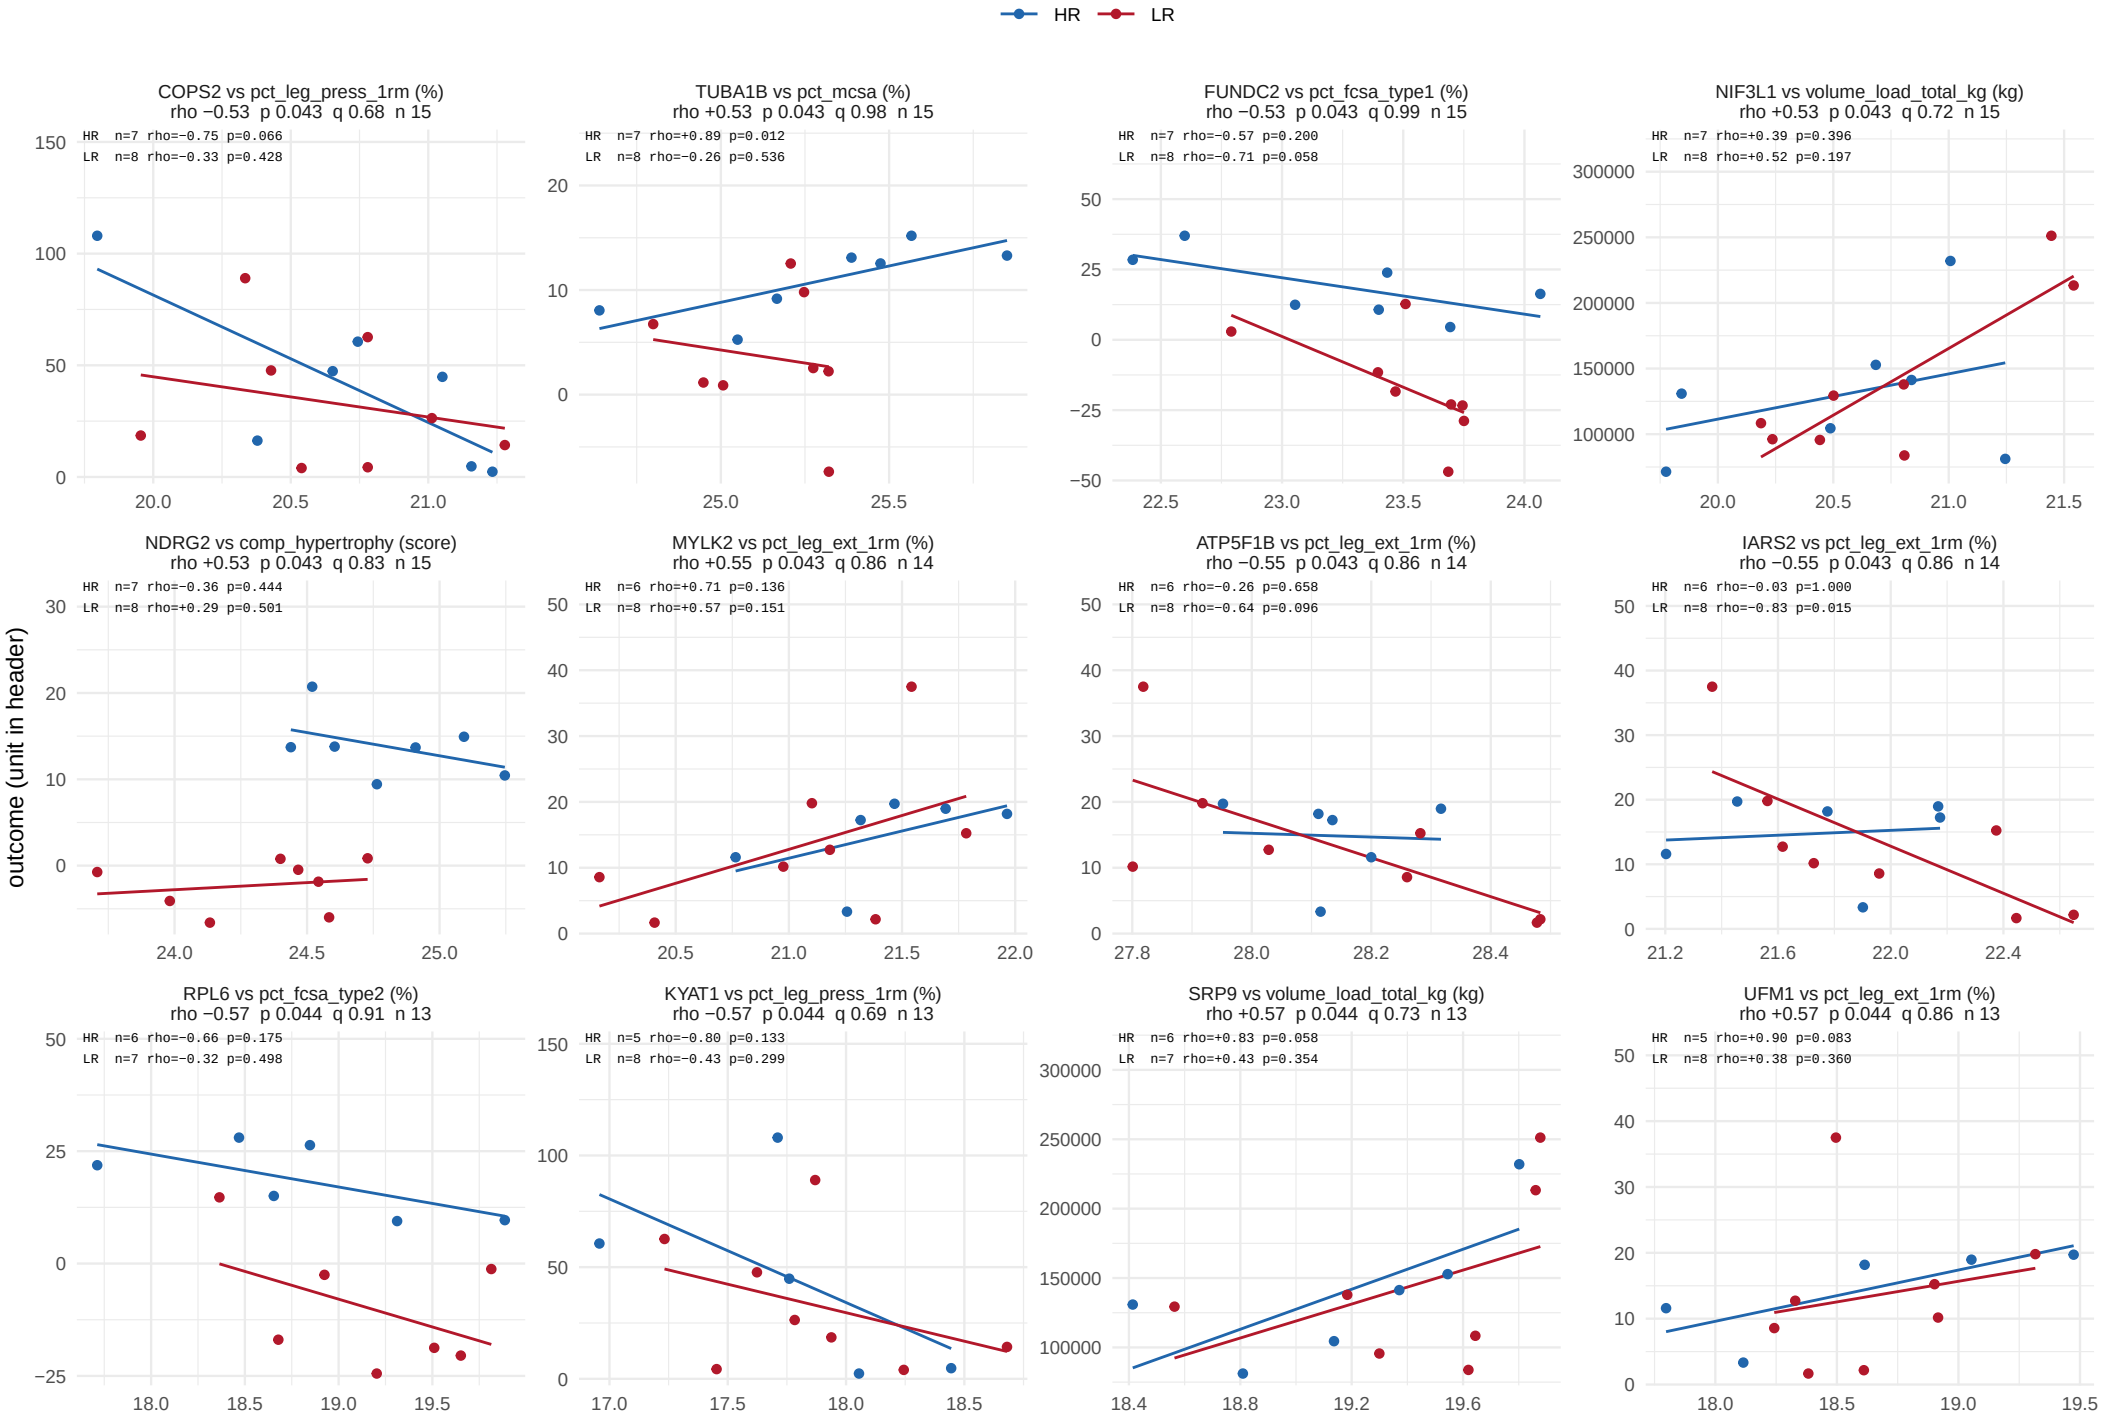

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


654 of 12553 feature−outcome pairs at p < 0.05, 8 at BH < 0.05. Page 49 of 55.

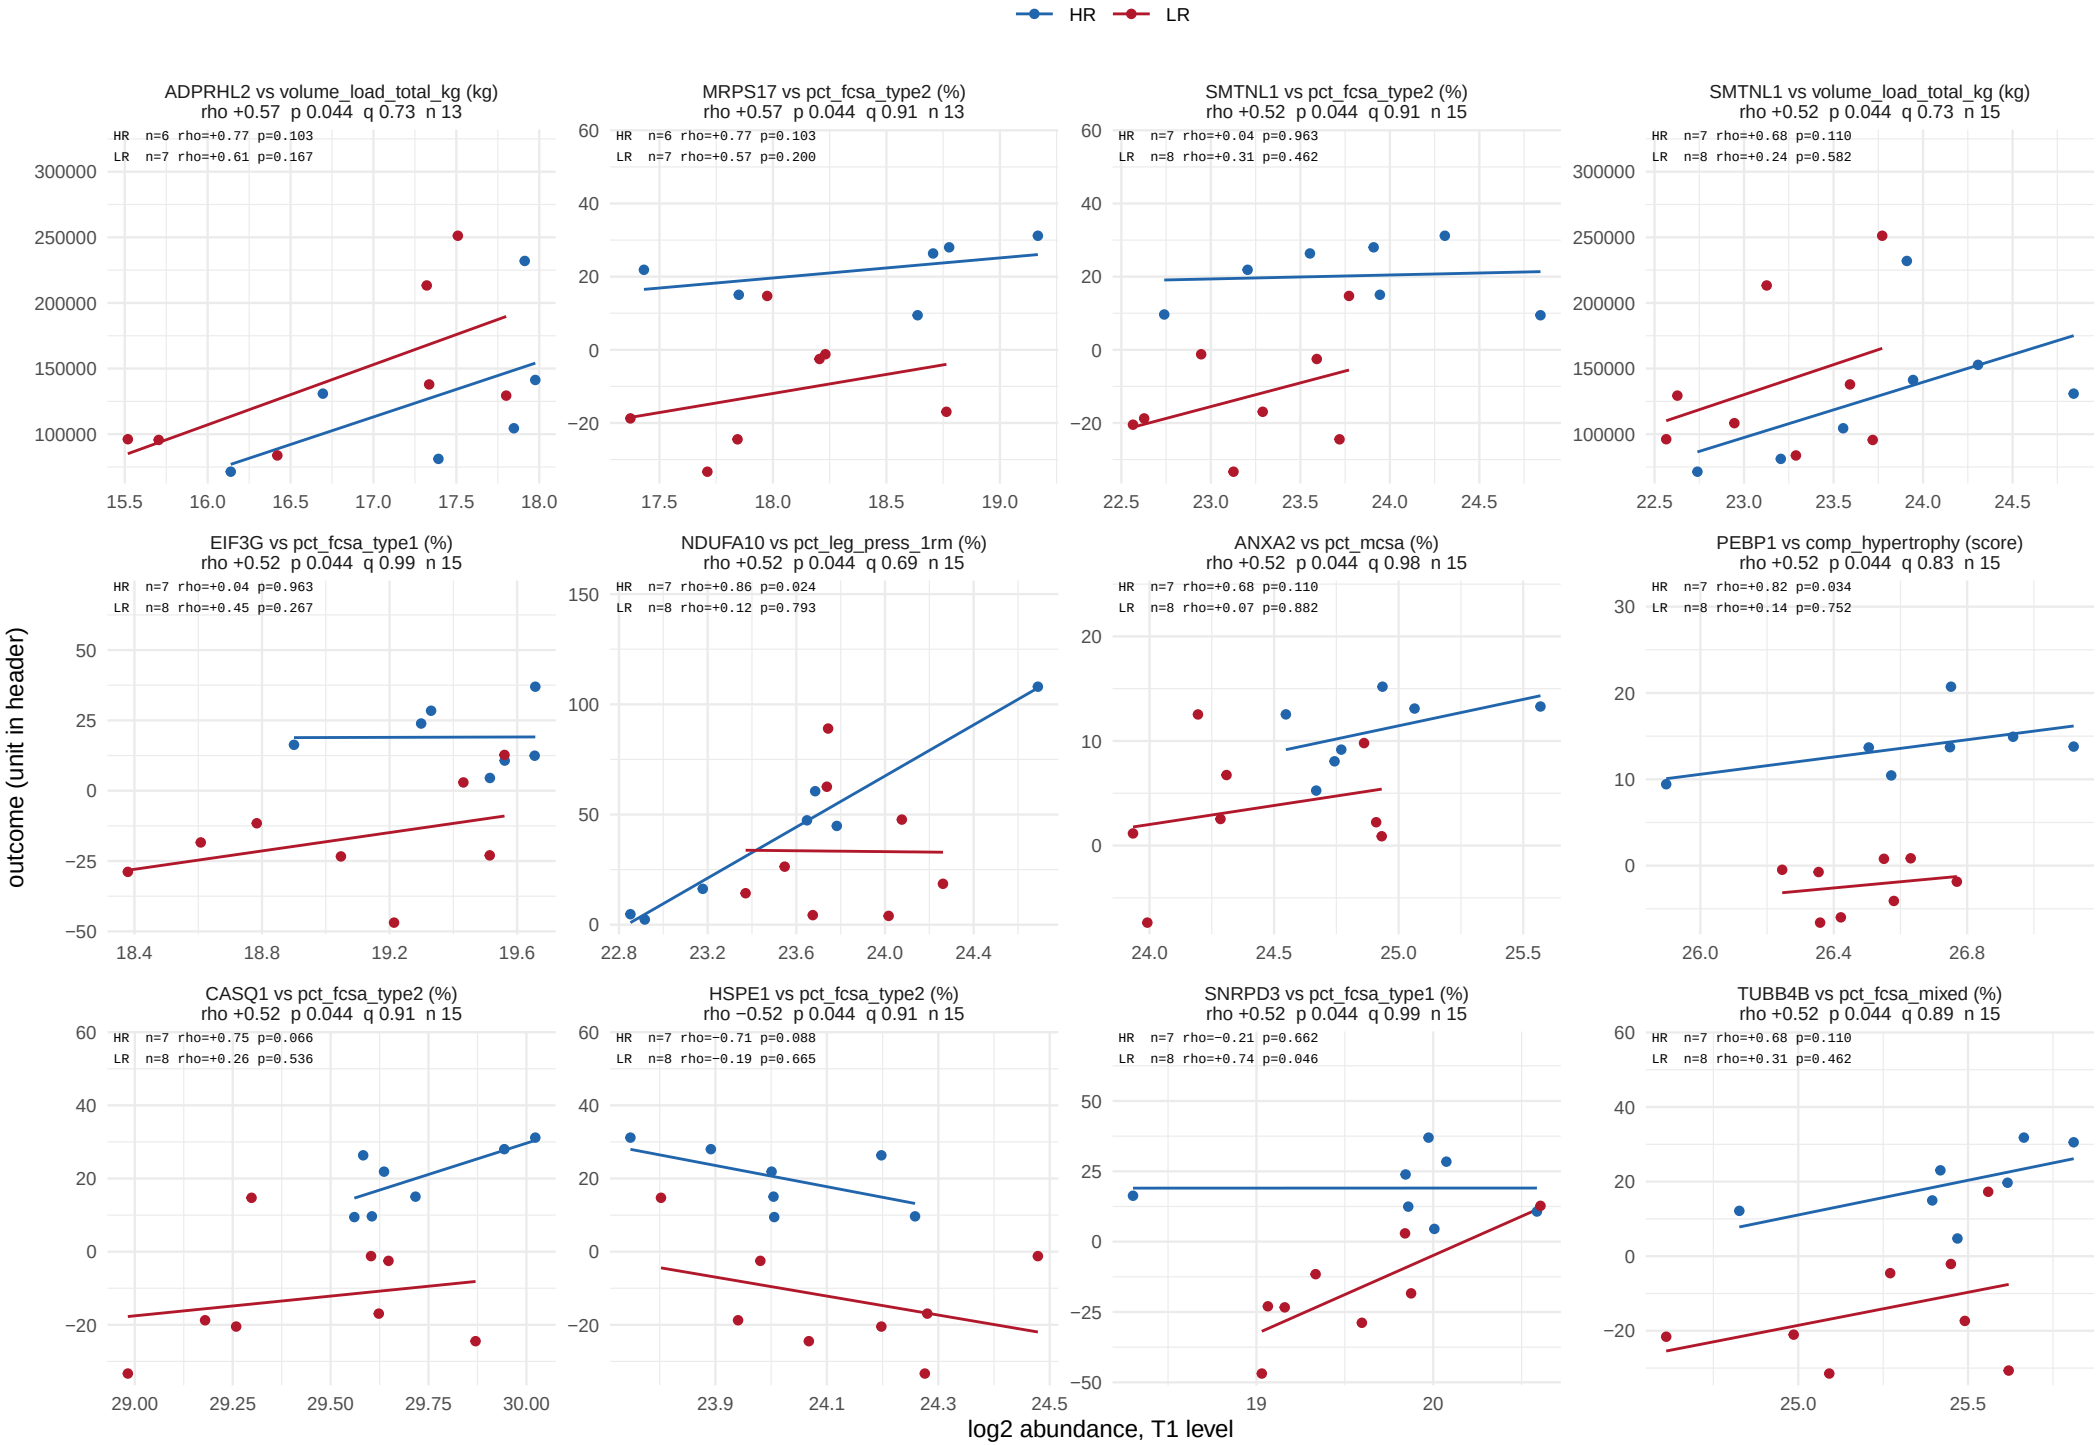

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


654 of 12553 feature−outcome pairs at p < 0.05, 8 at BH < 0.05. Page 50 of 55.

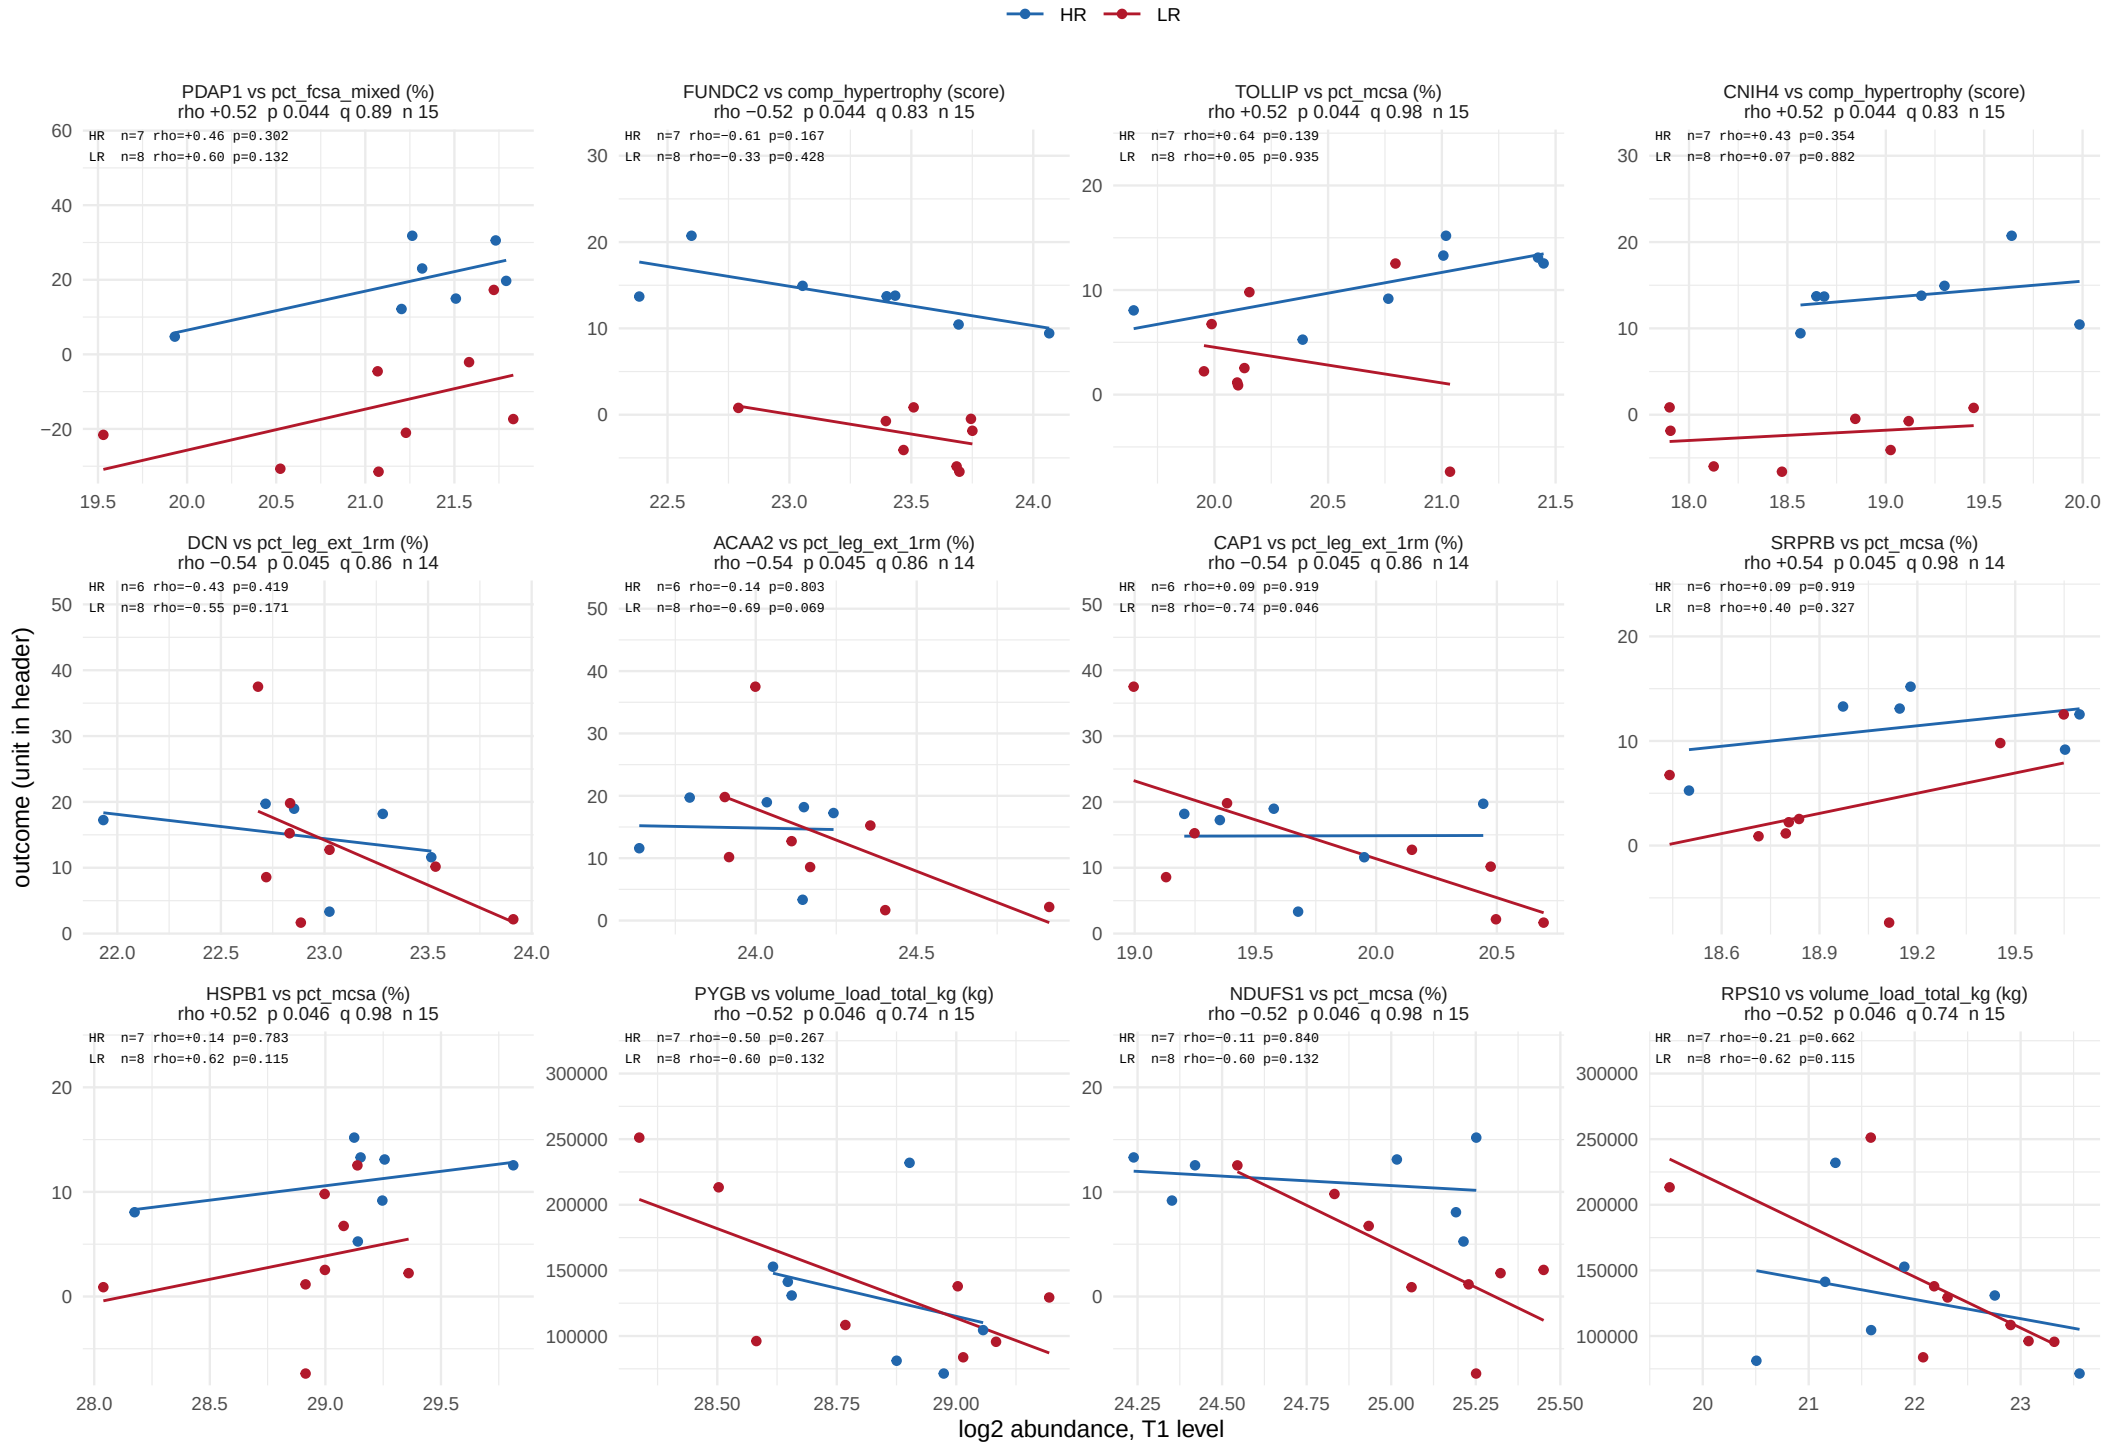

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


654 of 12553 feature−outcome pairs at p < 0.05, 8 at BH < 0.05. Page 51 of 55.

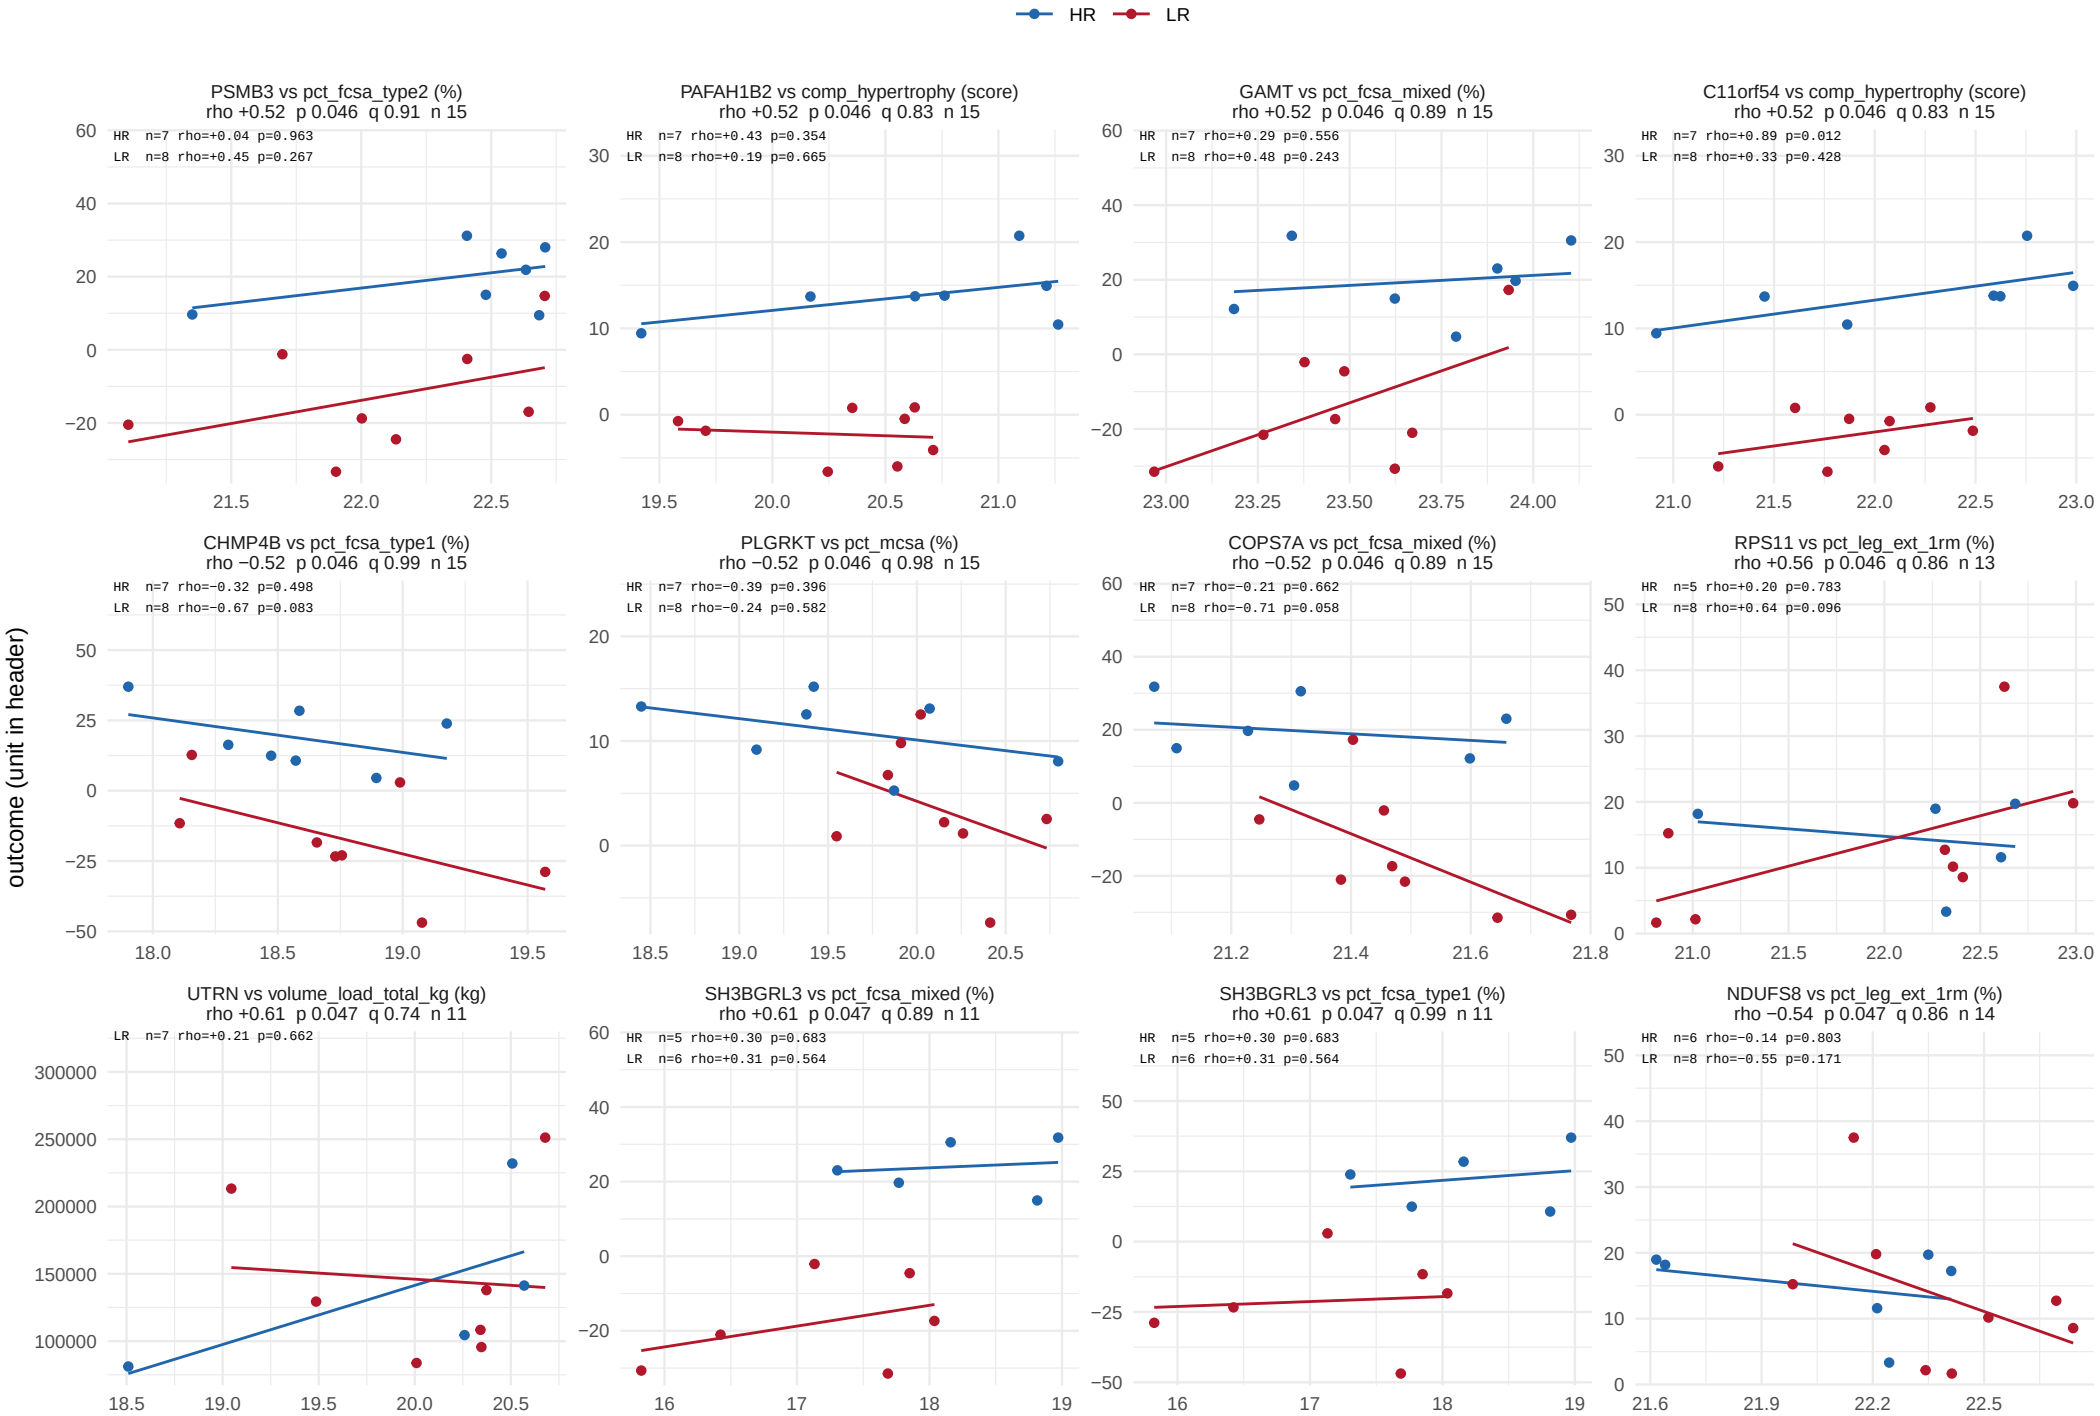

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


654 of 12553 feature−outcome pairs at p < 0.05, 8 at BH < 0.05. Page 52 of 55.

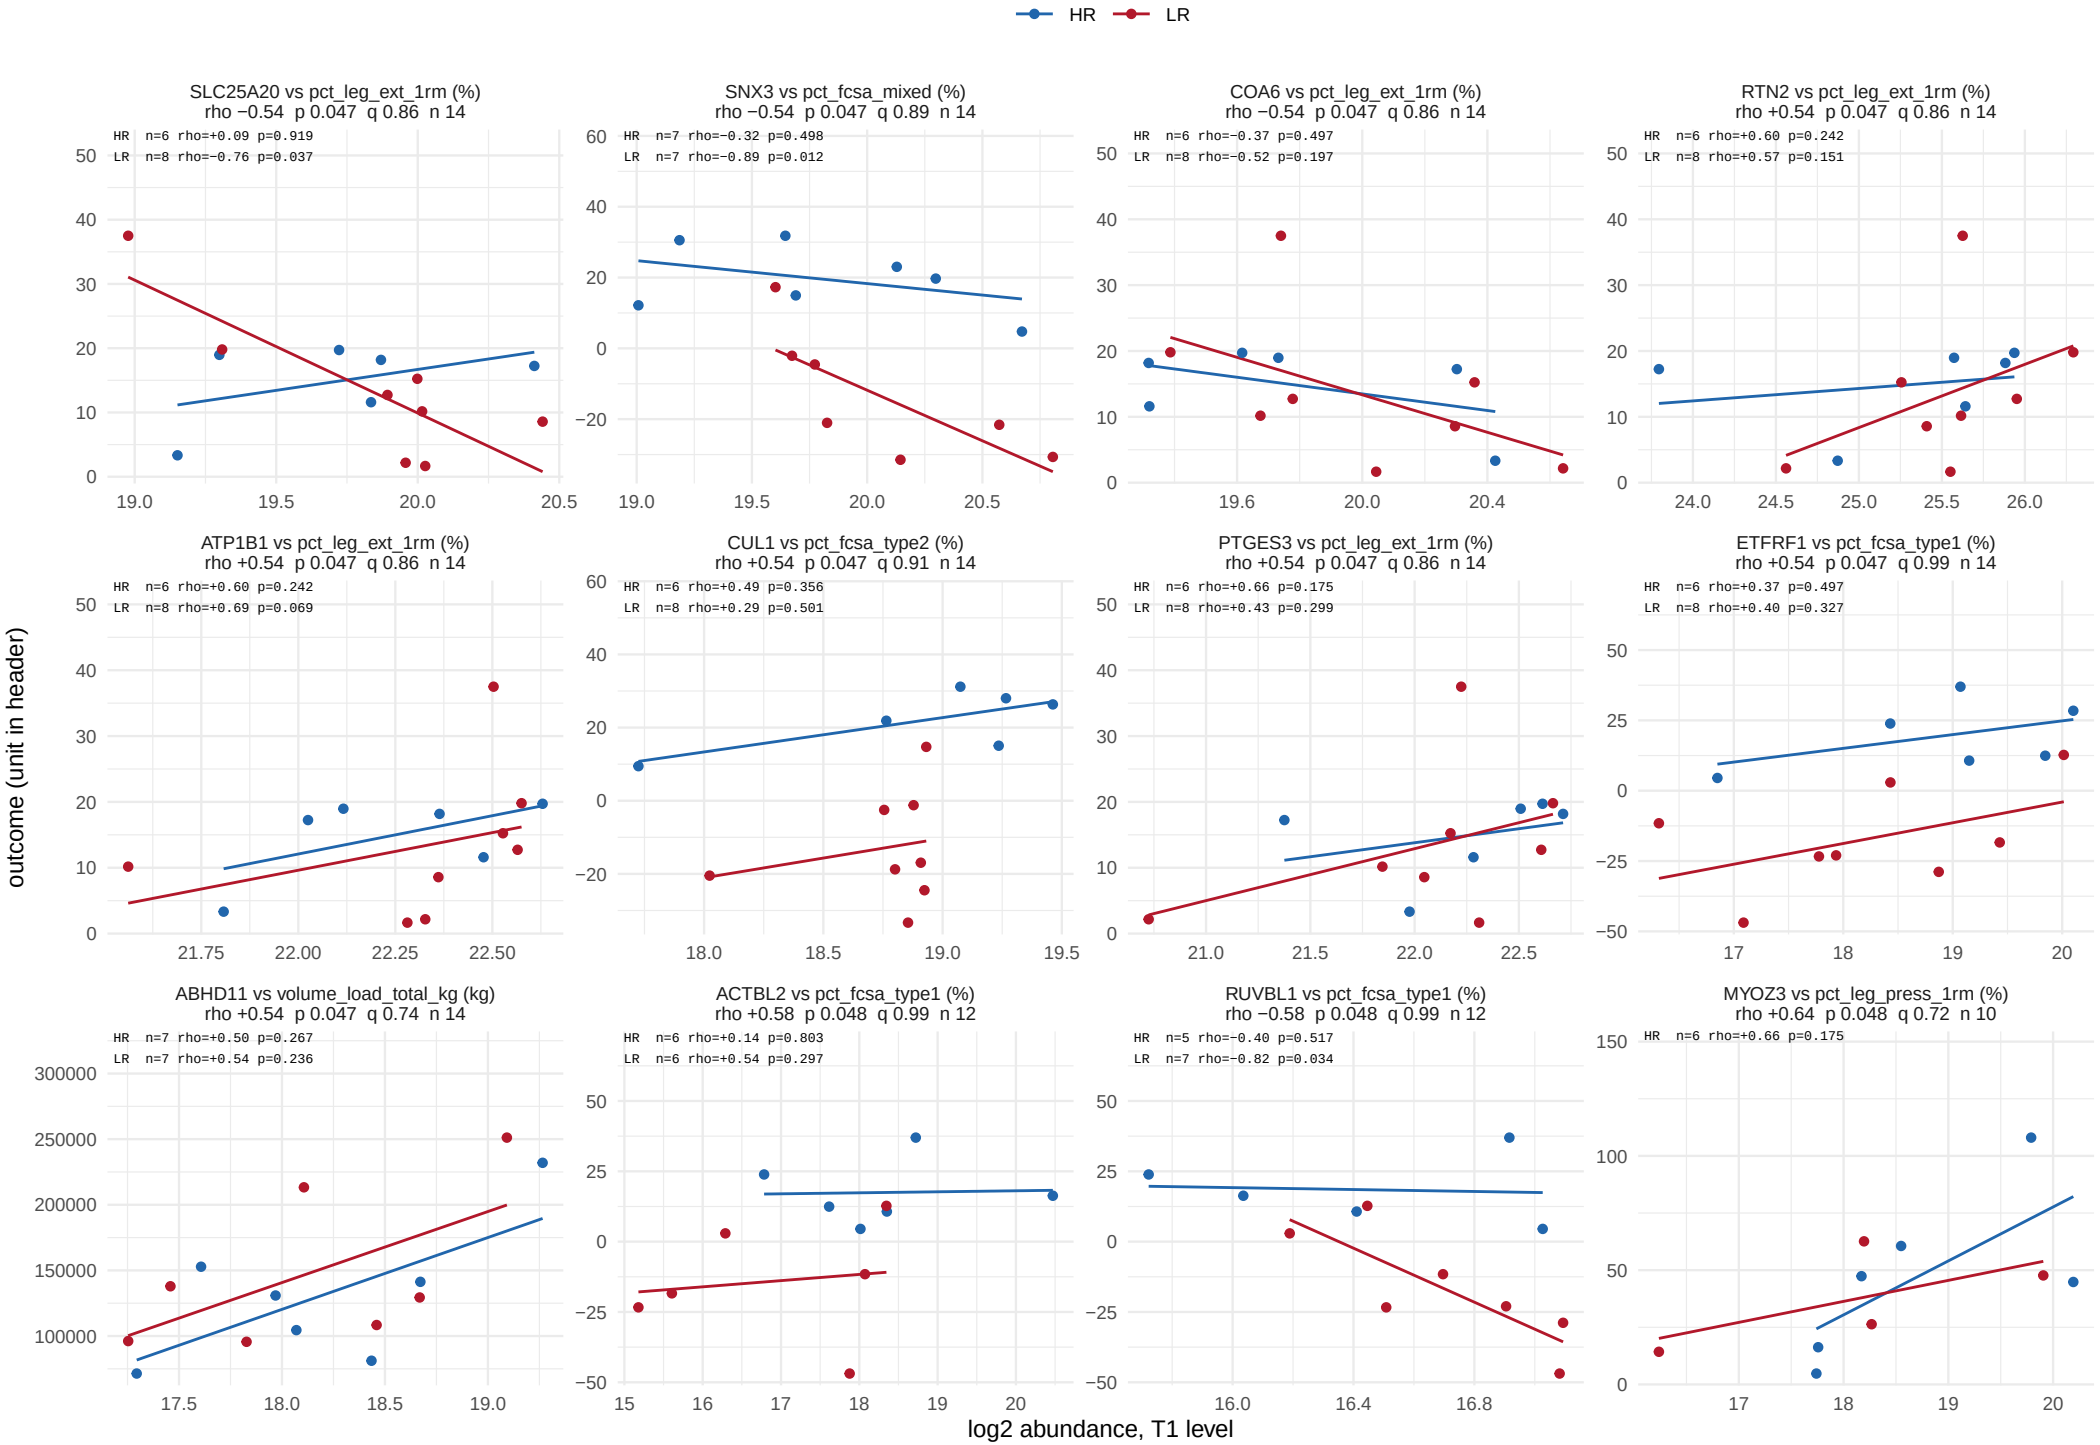

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


654 of 12553 feature−outcome pairs at p < 0.05, 8 at BH < 0.05. Page 53 of 55.

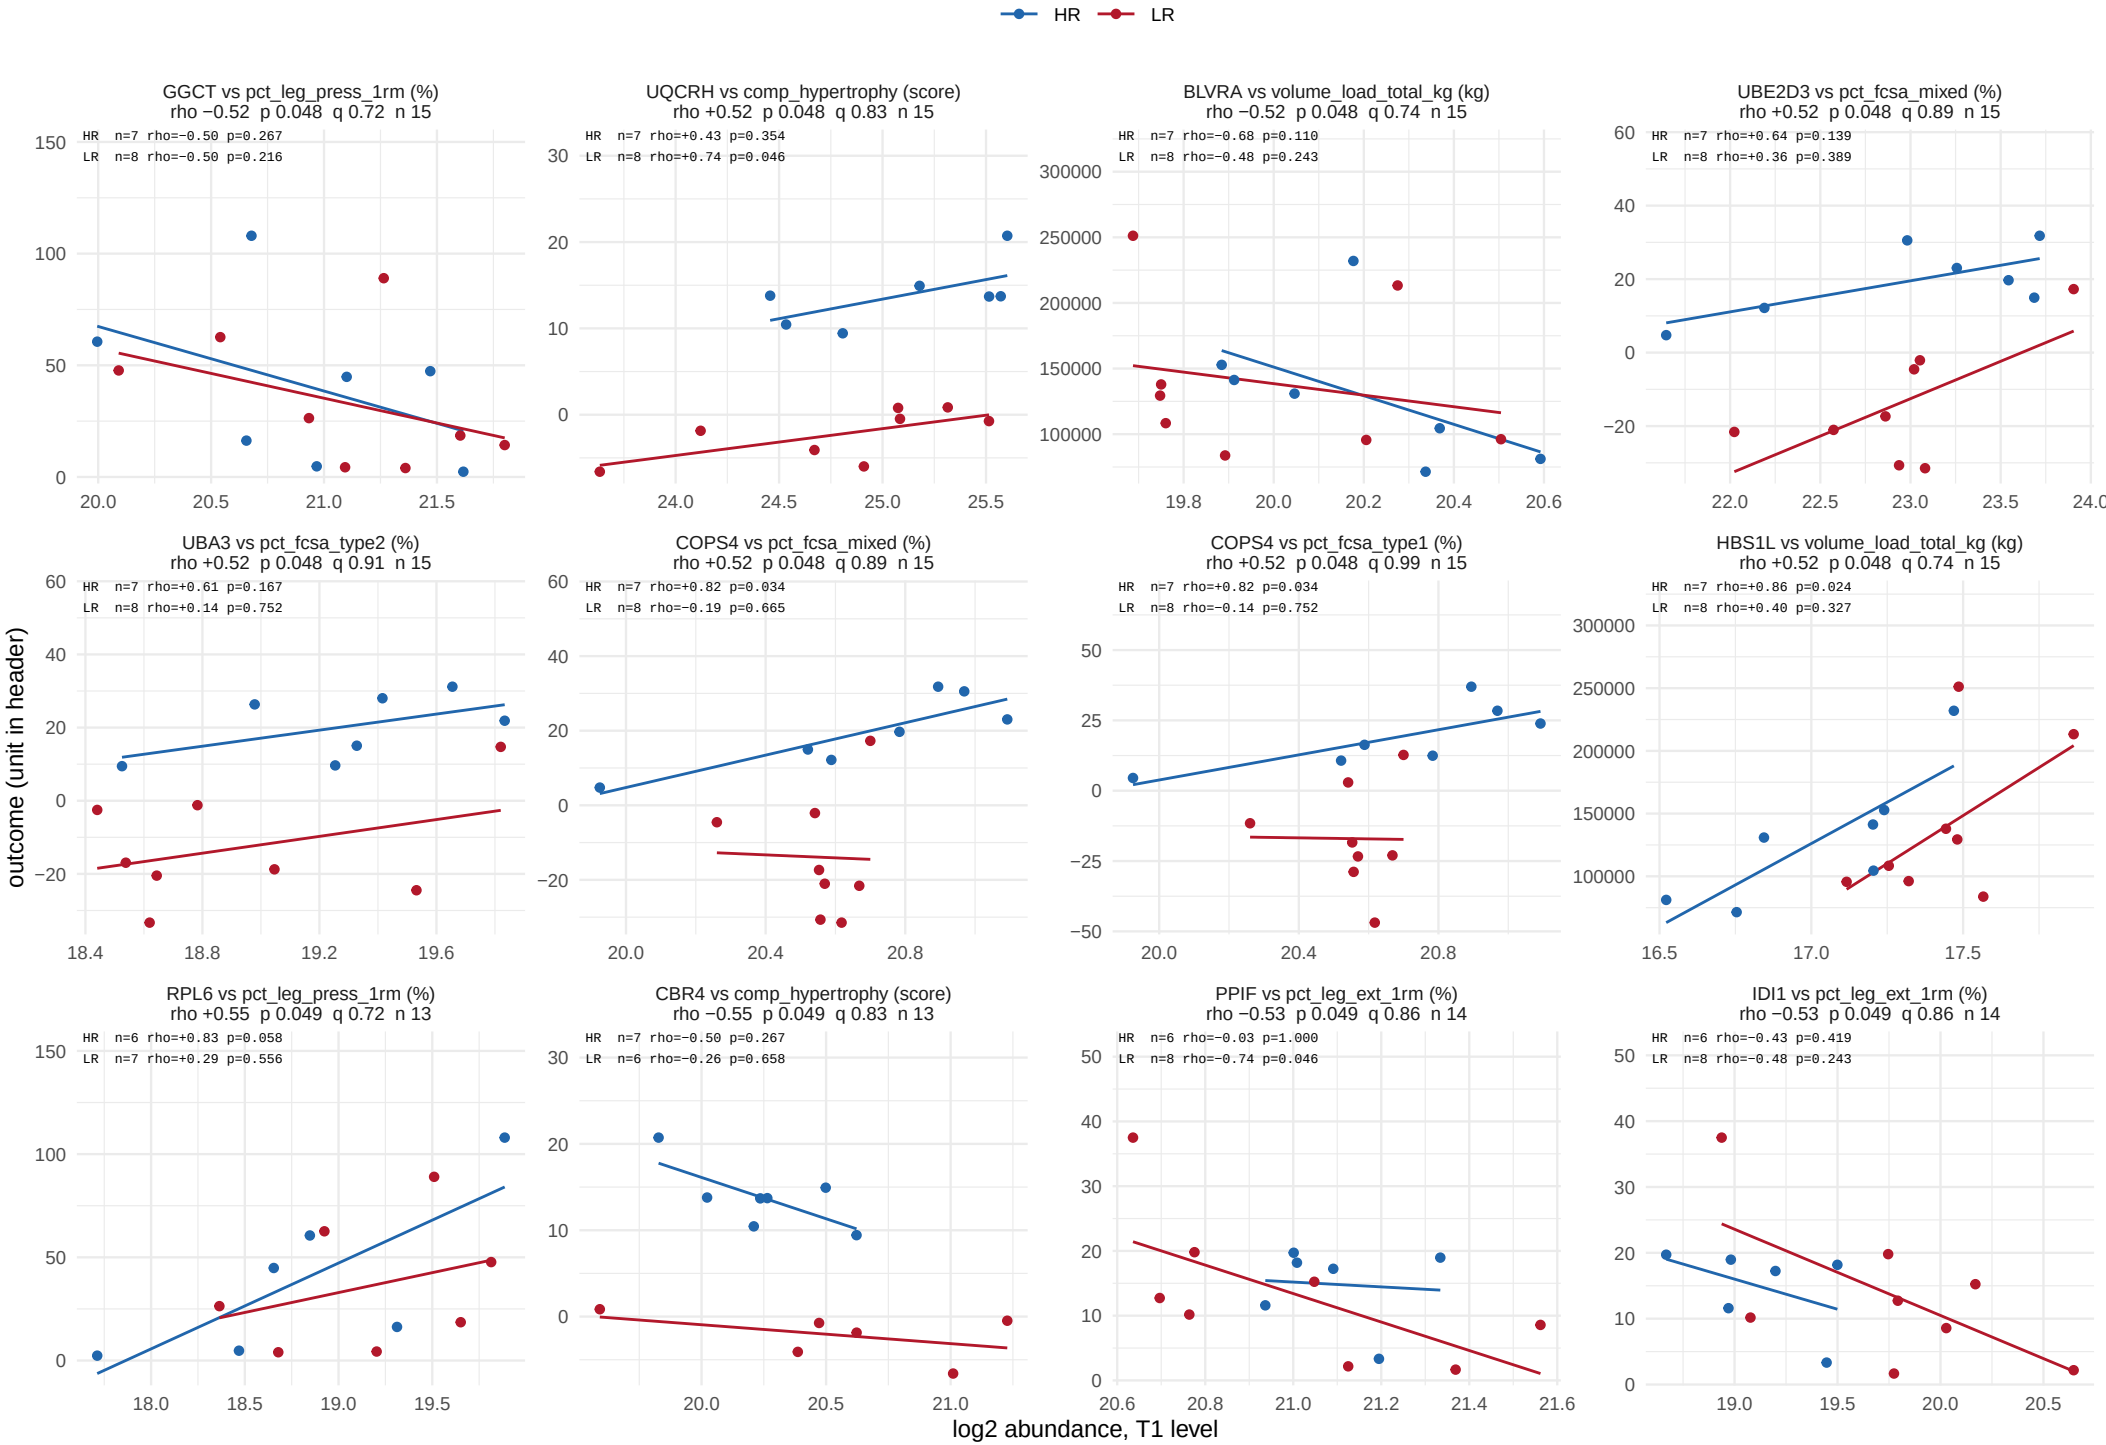

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


654 of 12553 feature−outcome pairs at p < 0.05, 8 at BH < 0.05. Page 54 of 55.

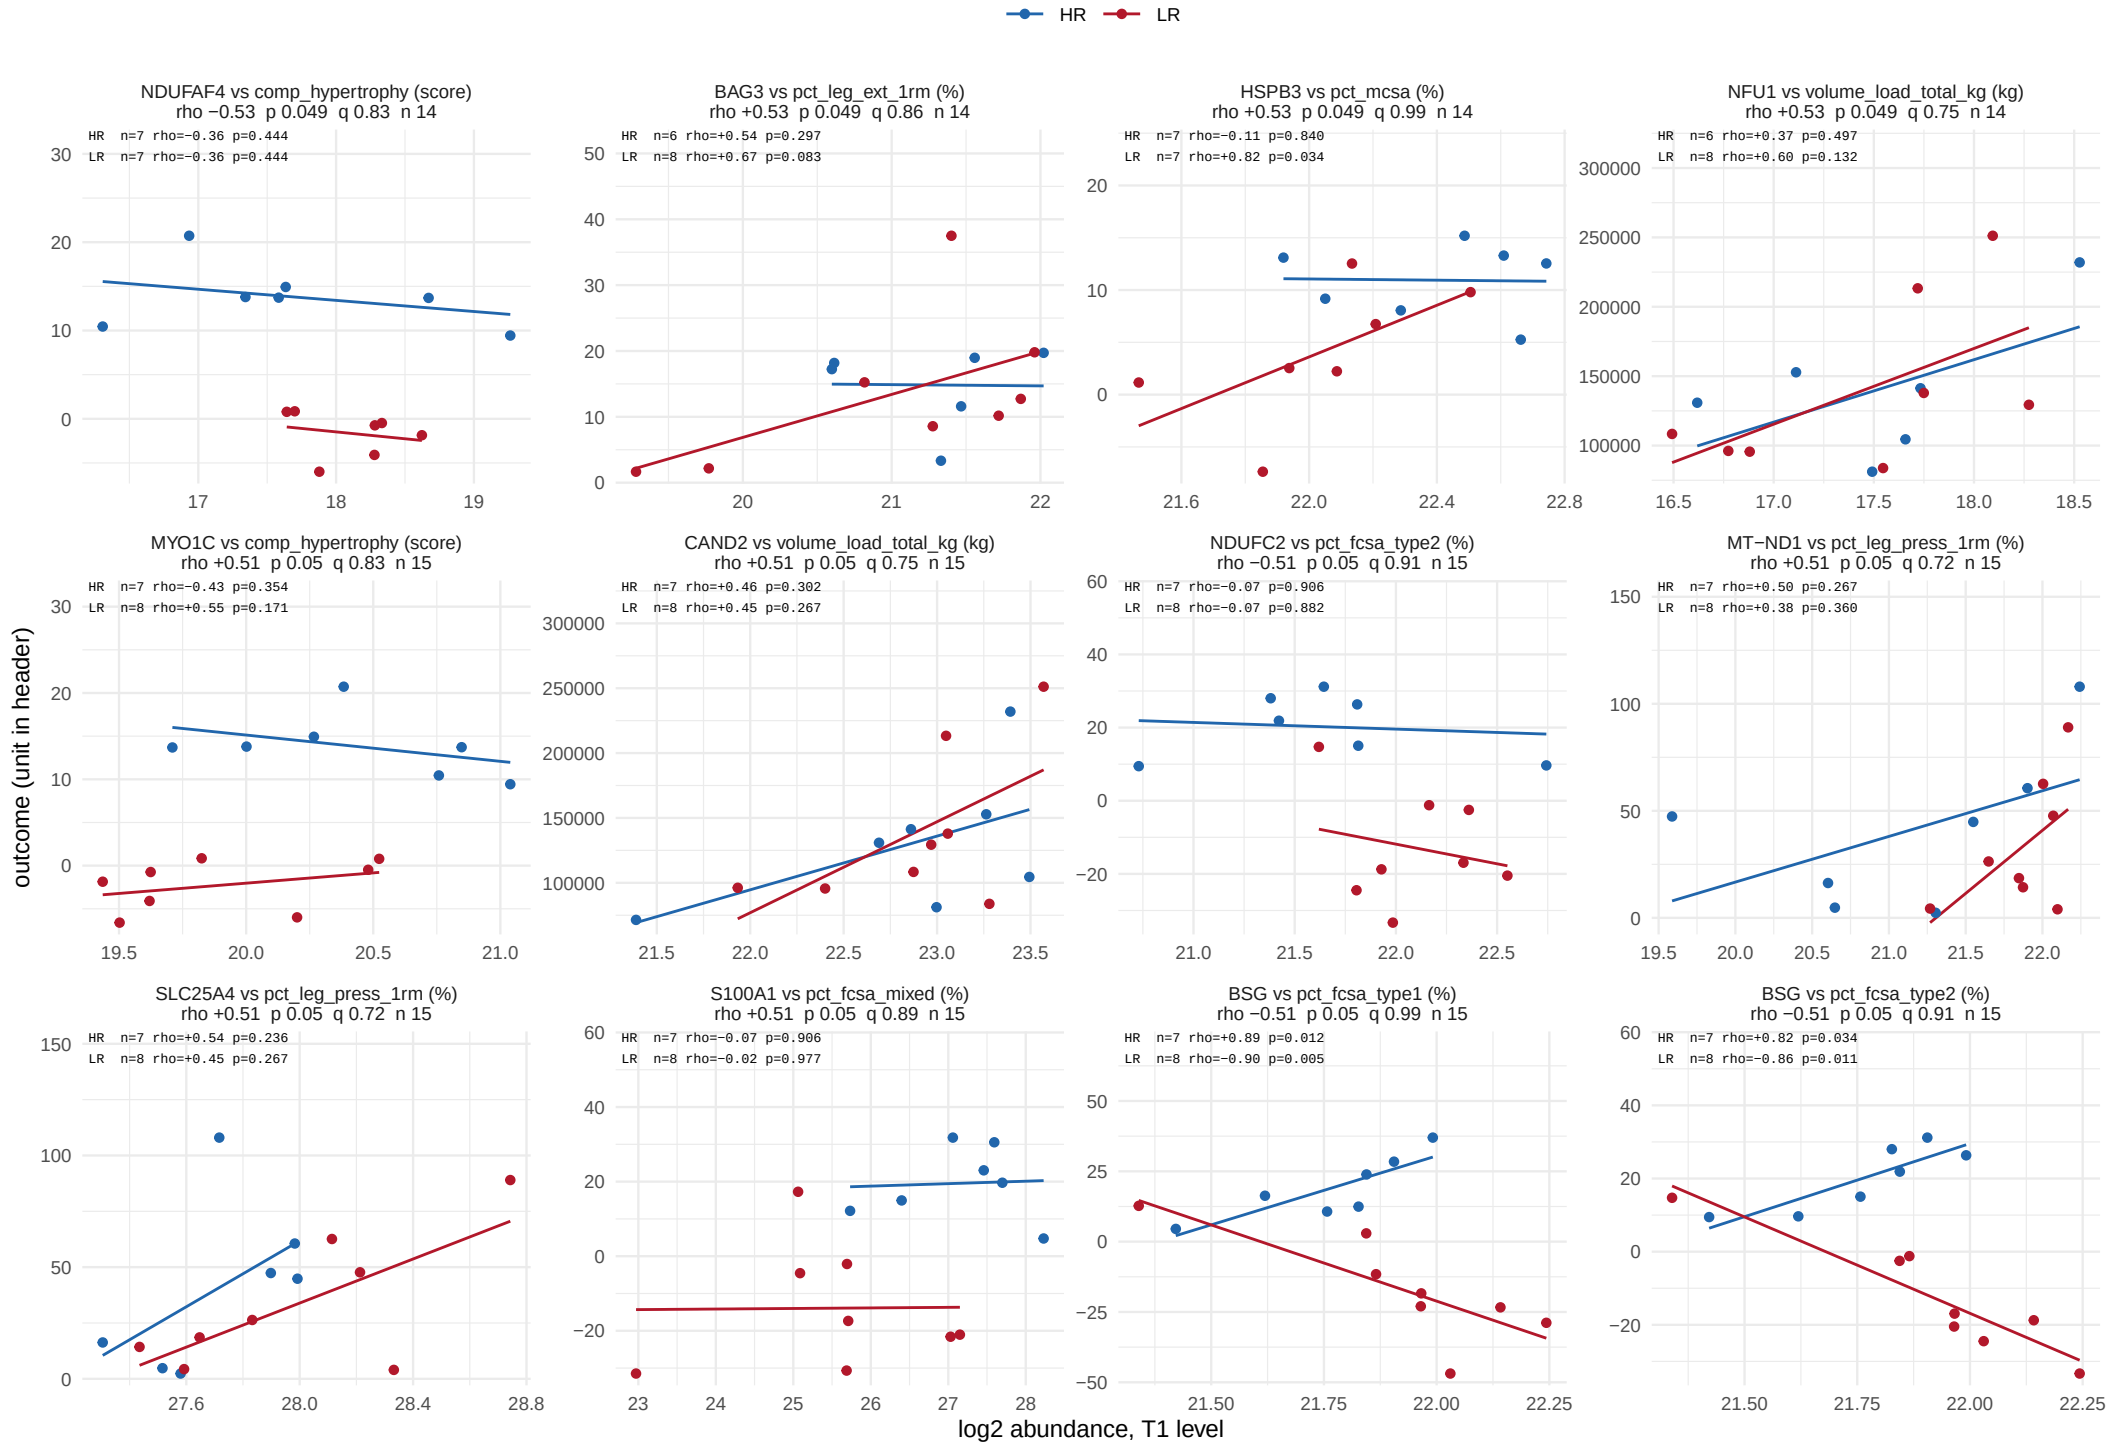

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


654 of 12553 feature−outcome pairs at p < 0.05, 8 at BH < 0.05. Page 55 of 55.

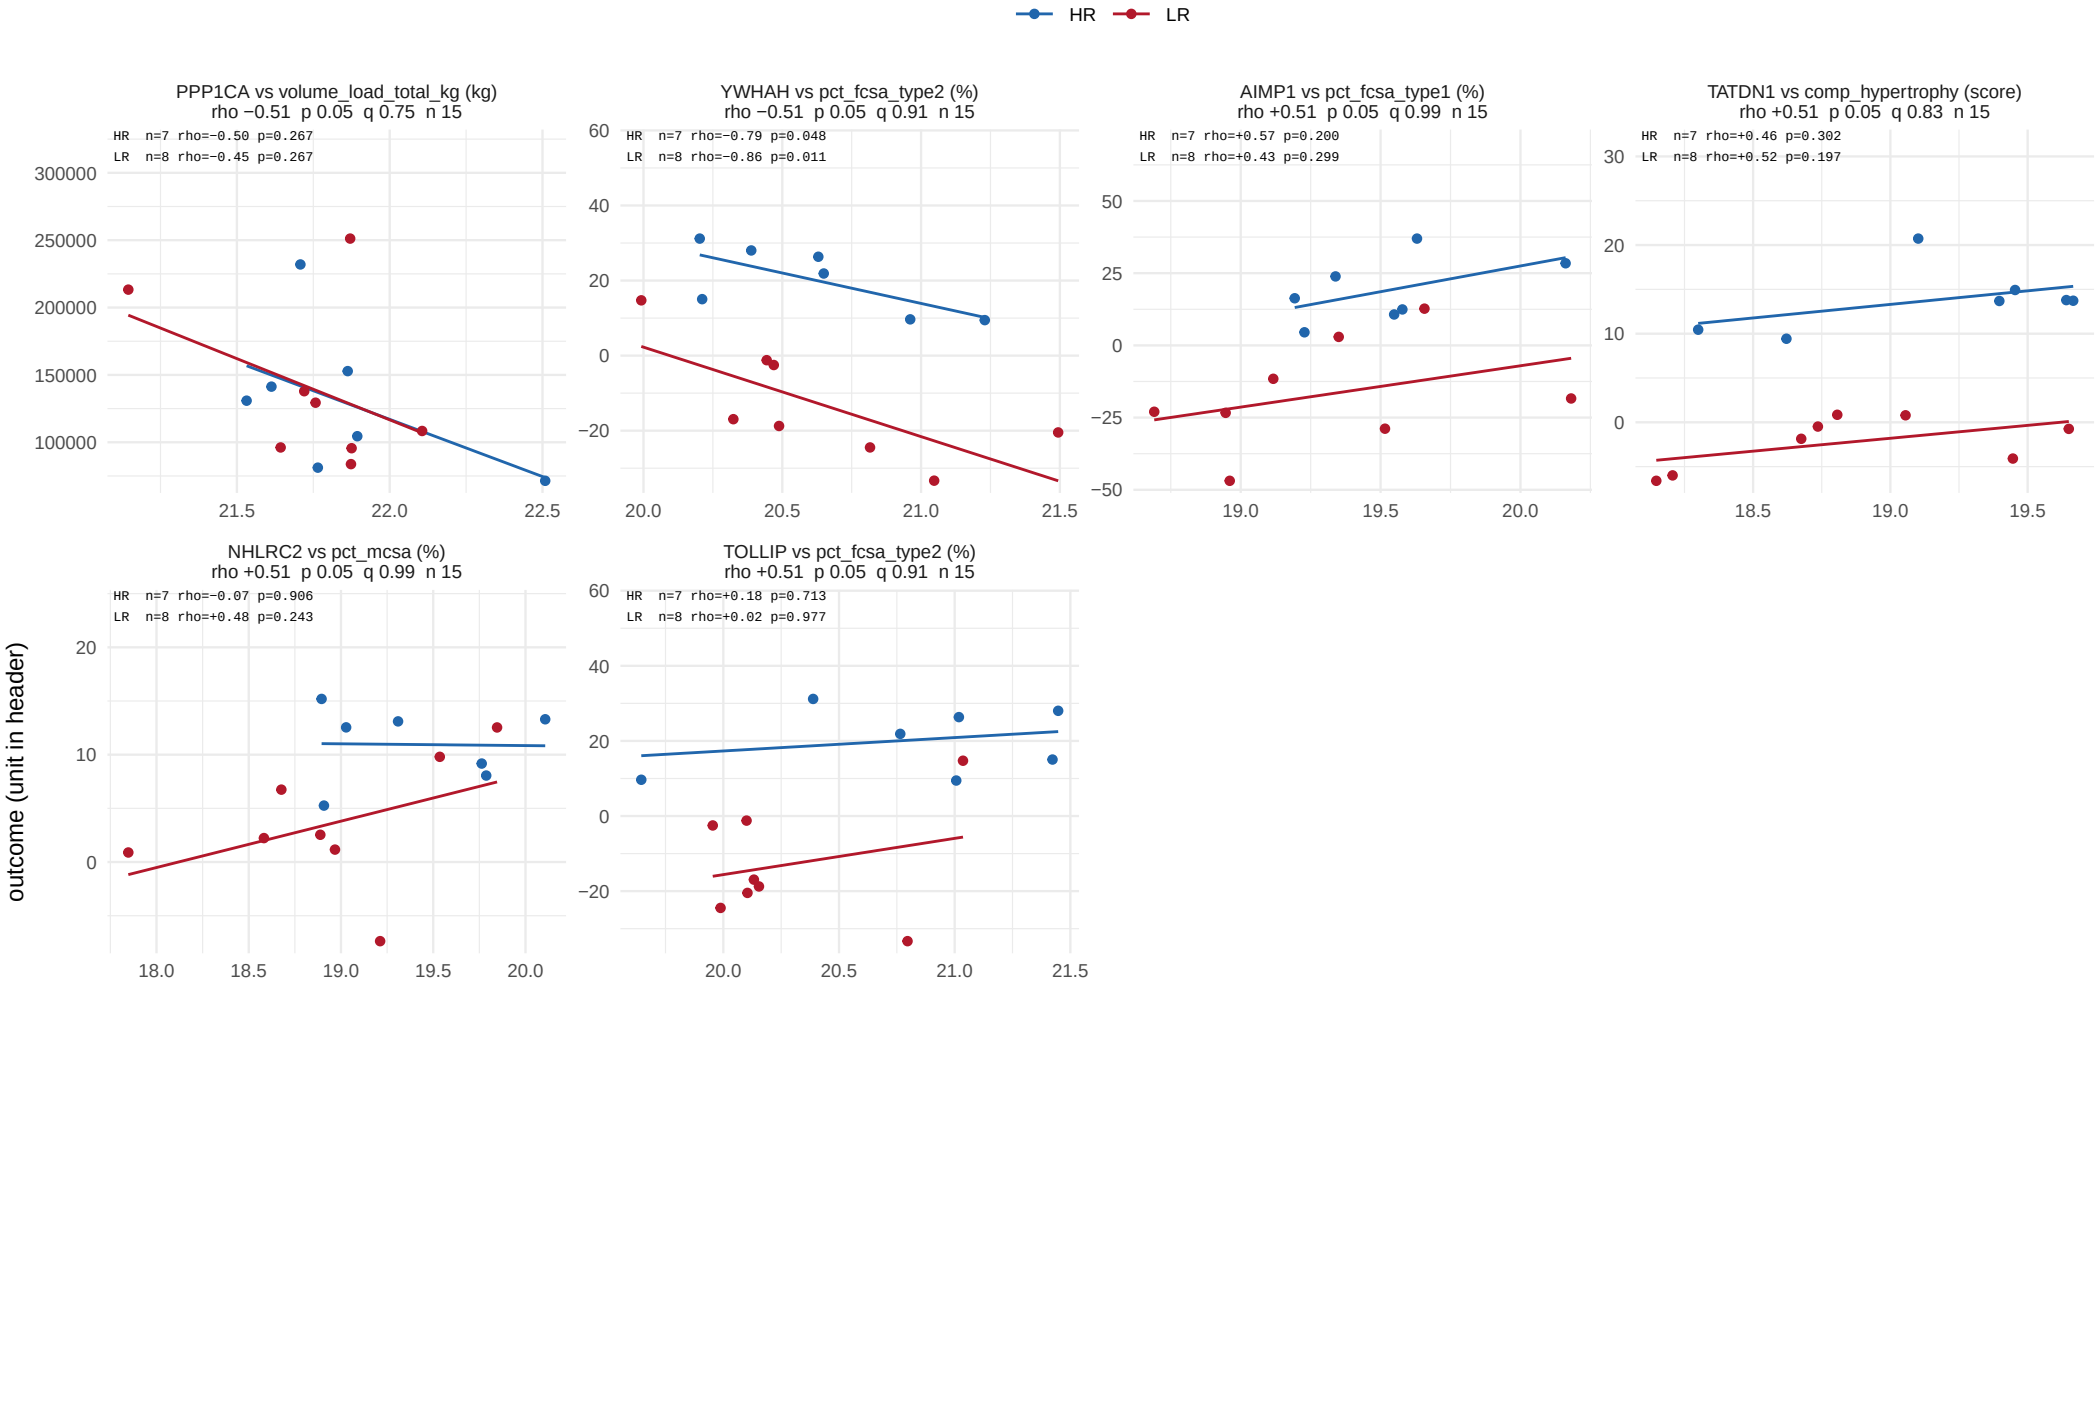

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


610 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 1 of 51.

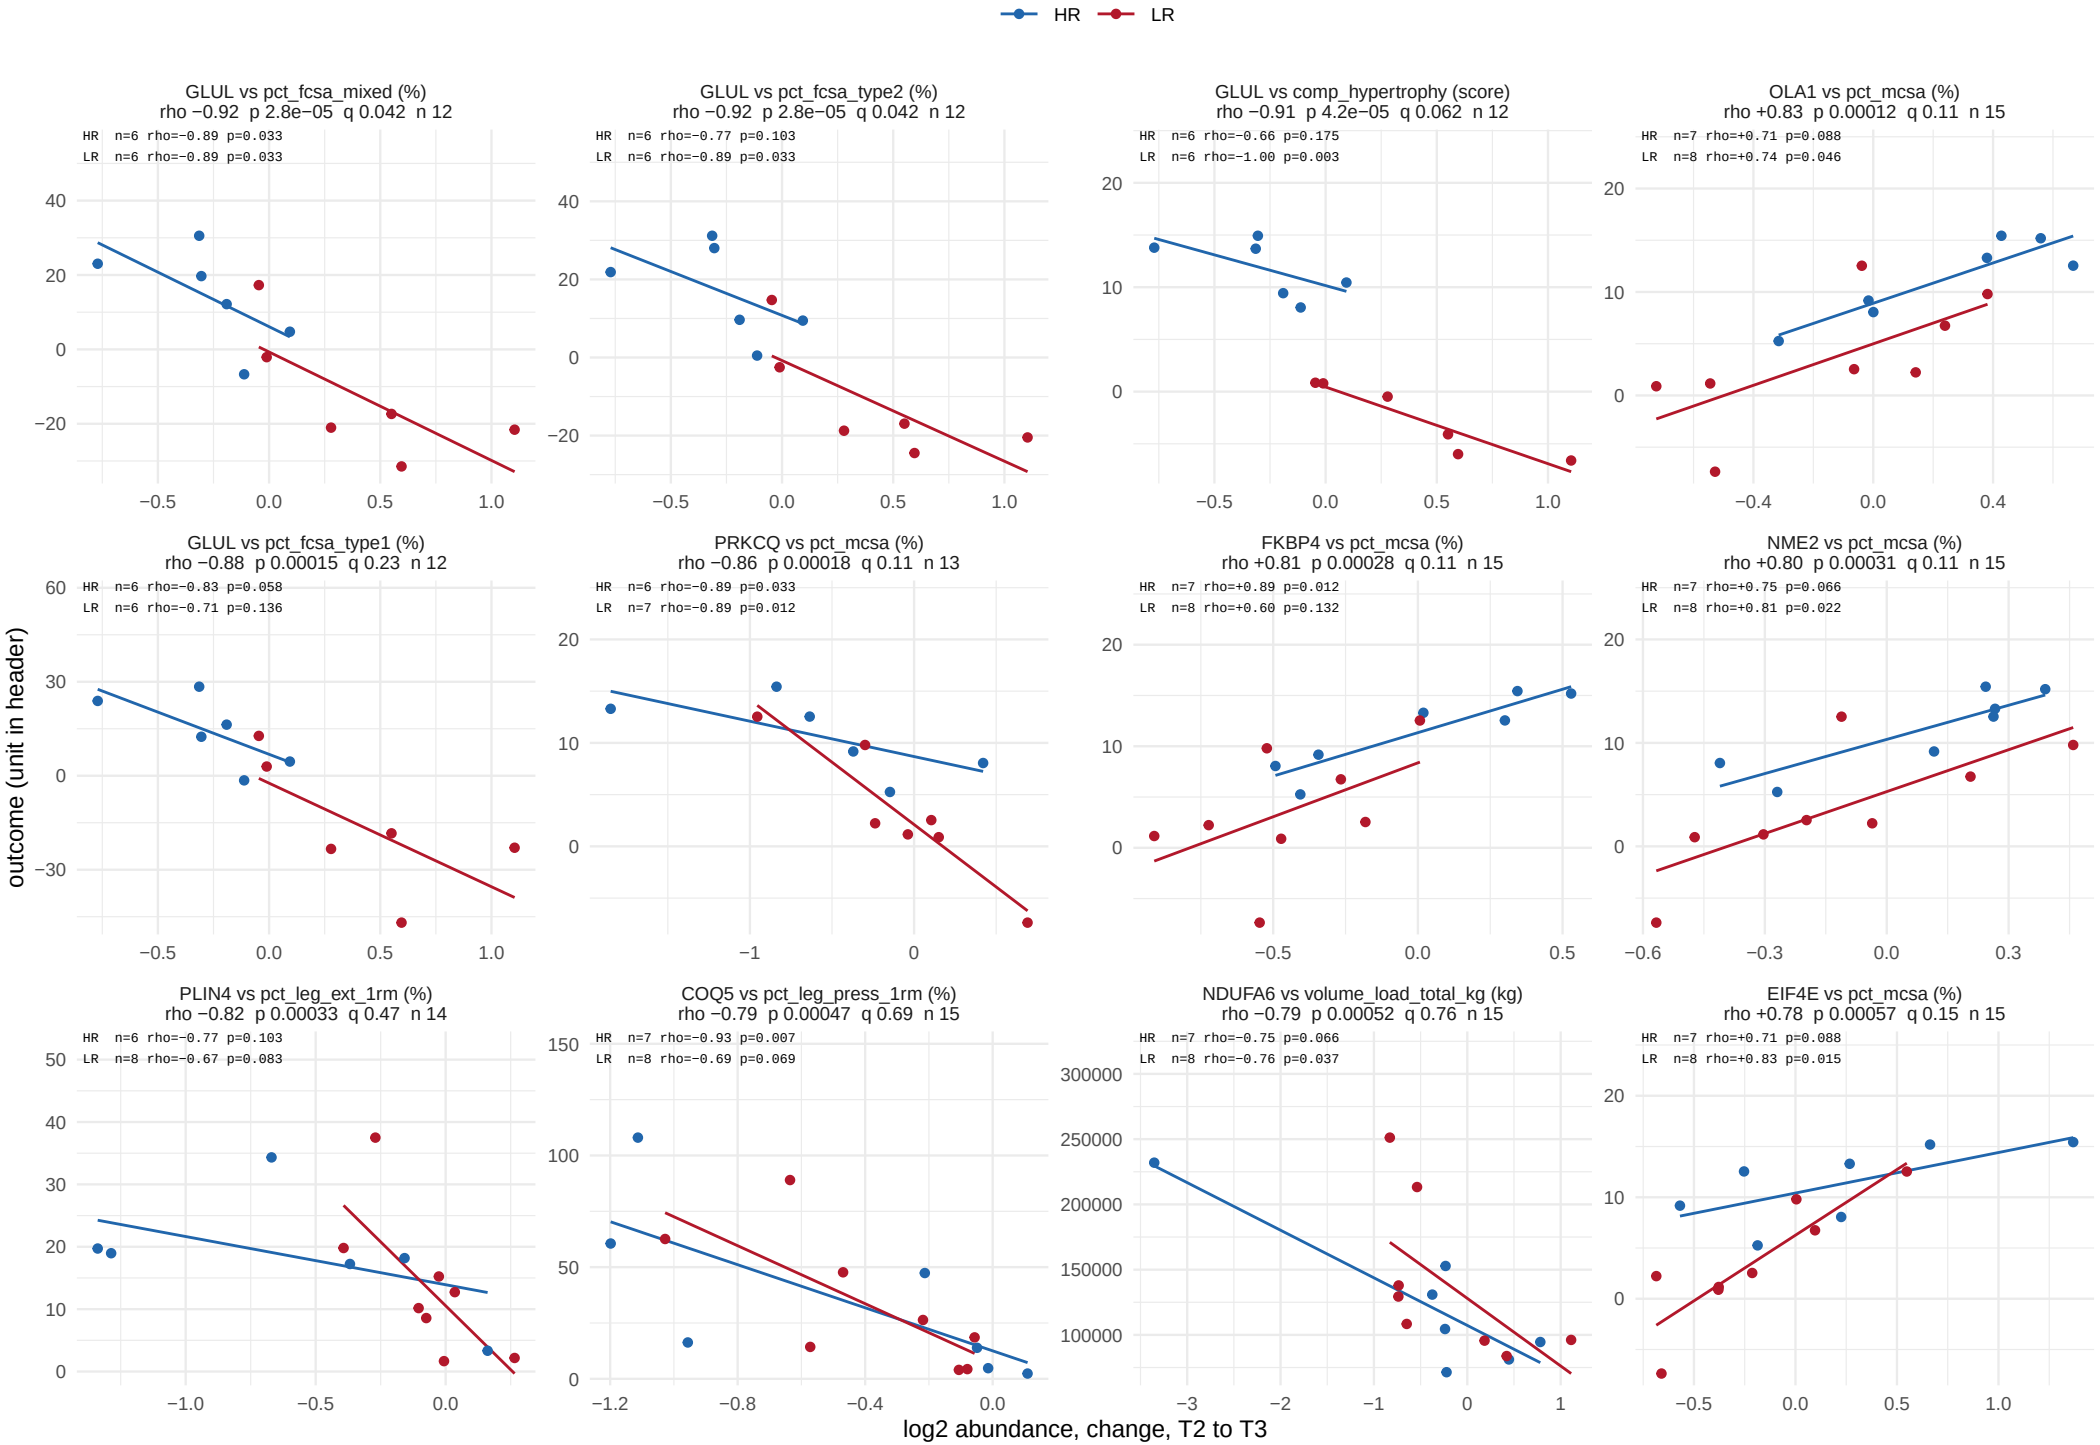

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


610 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 2 of 51.

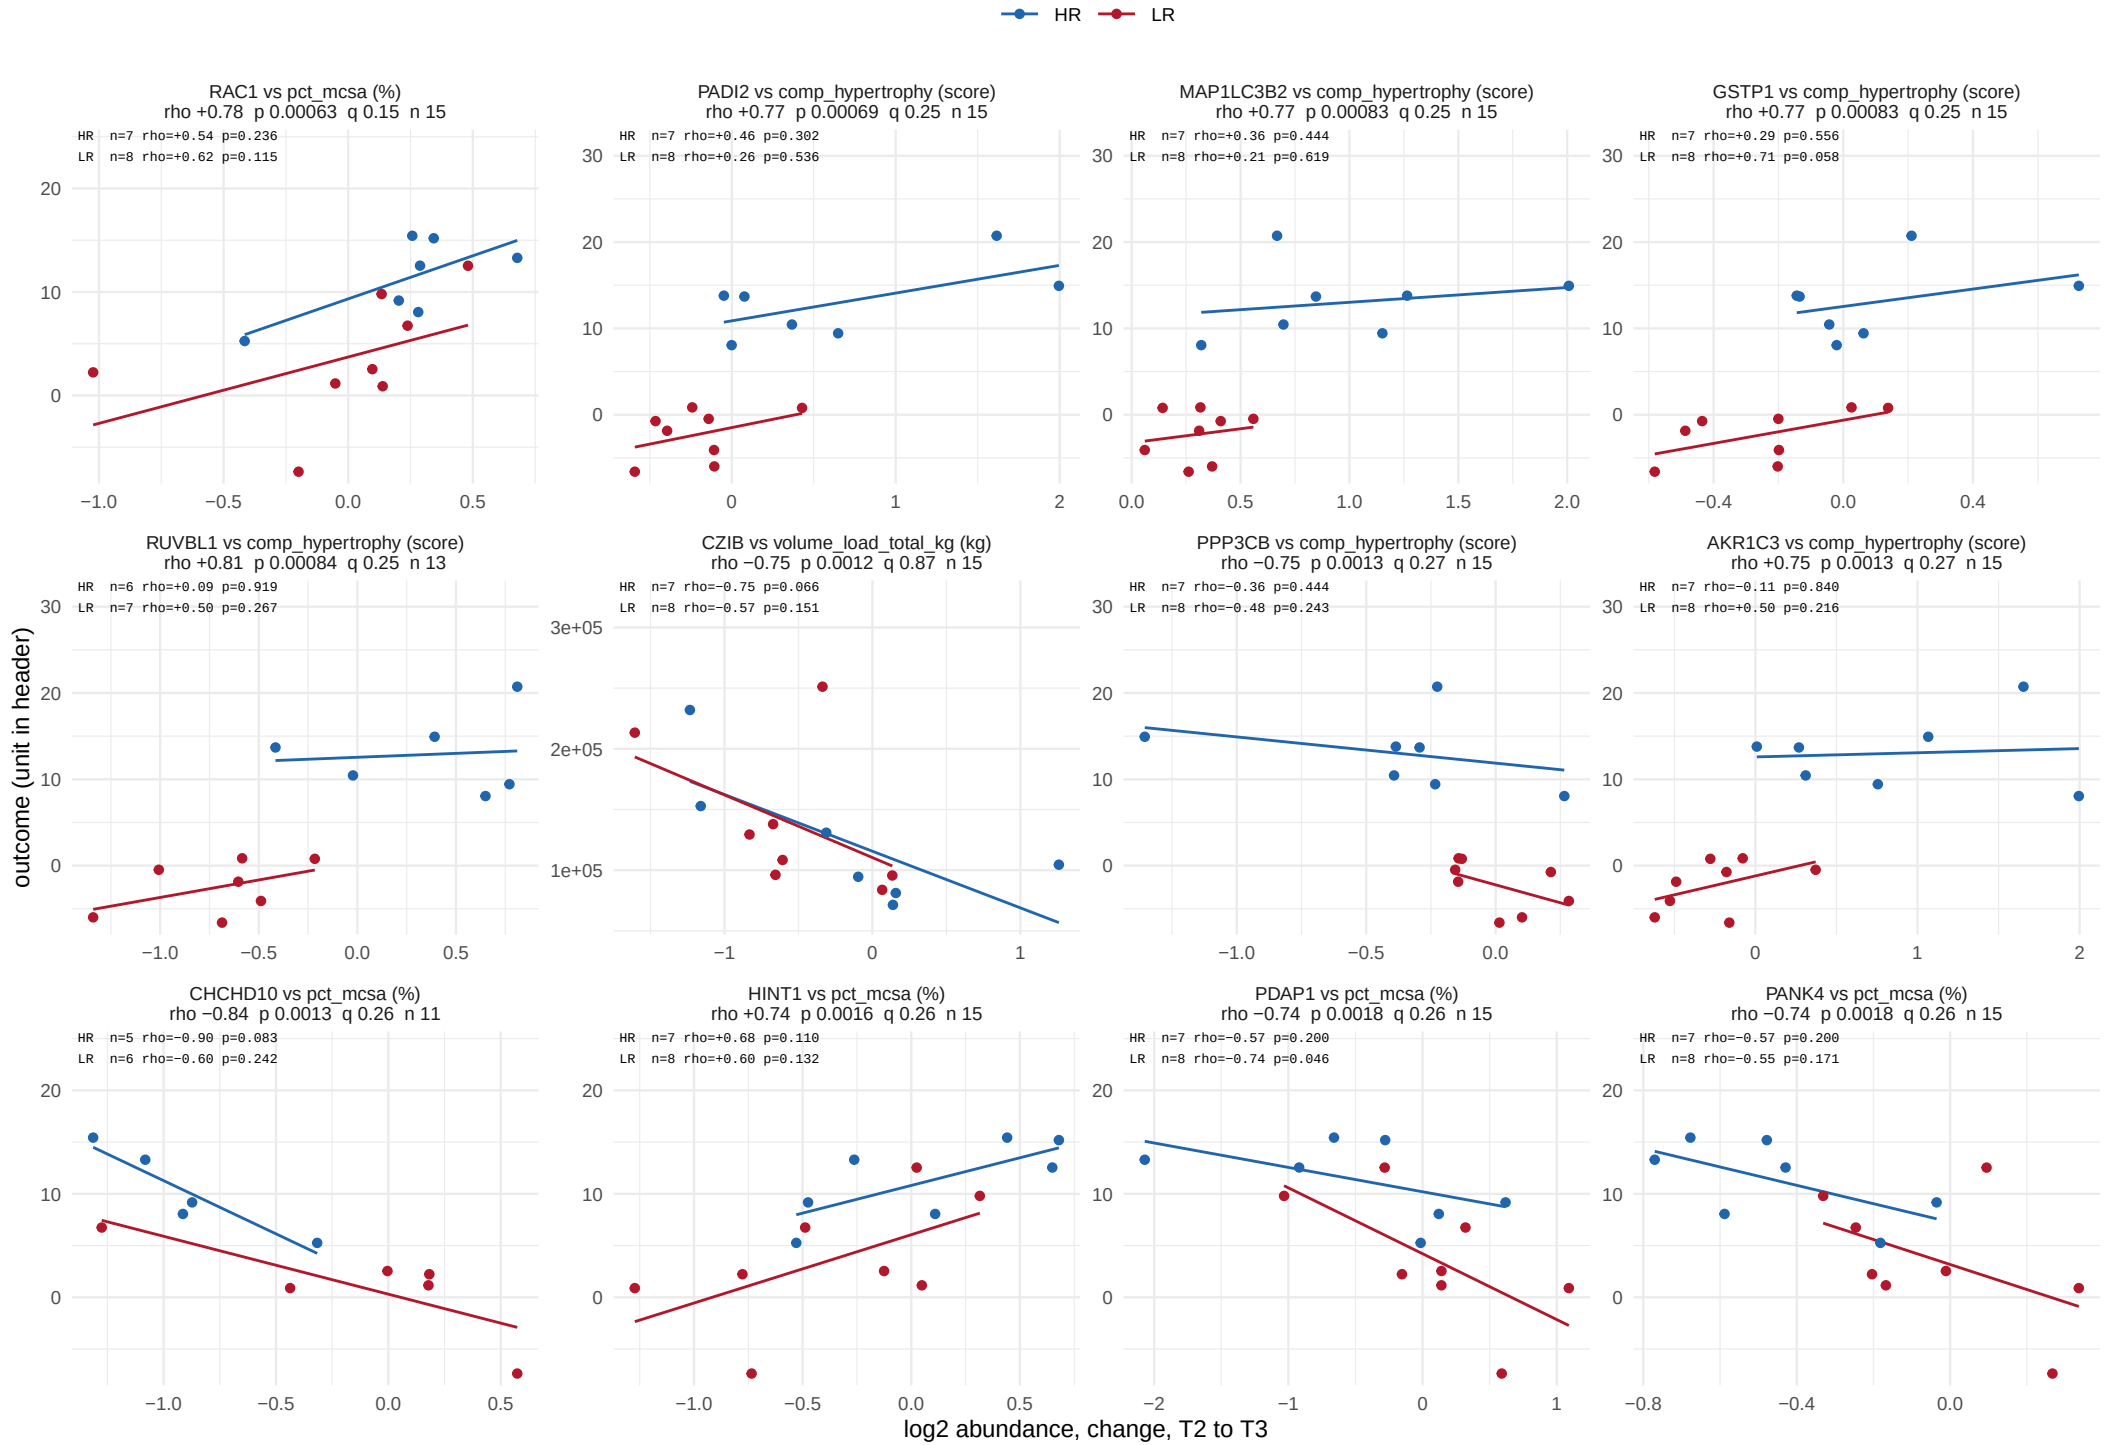

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window

610 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 3 of 51.

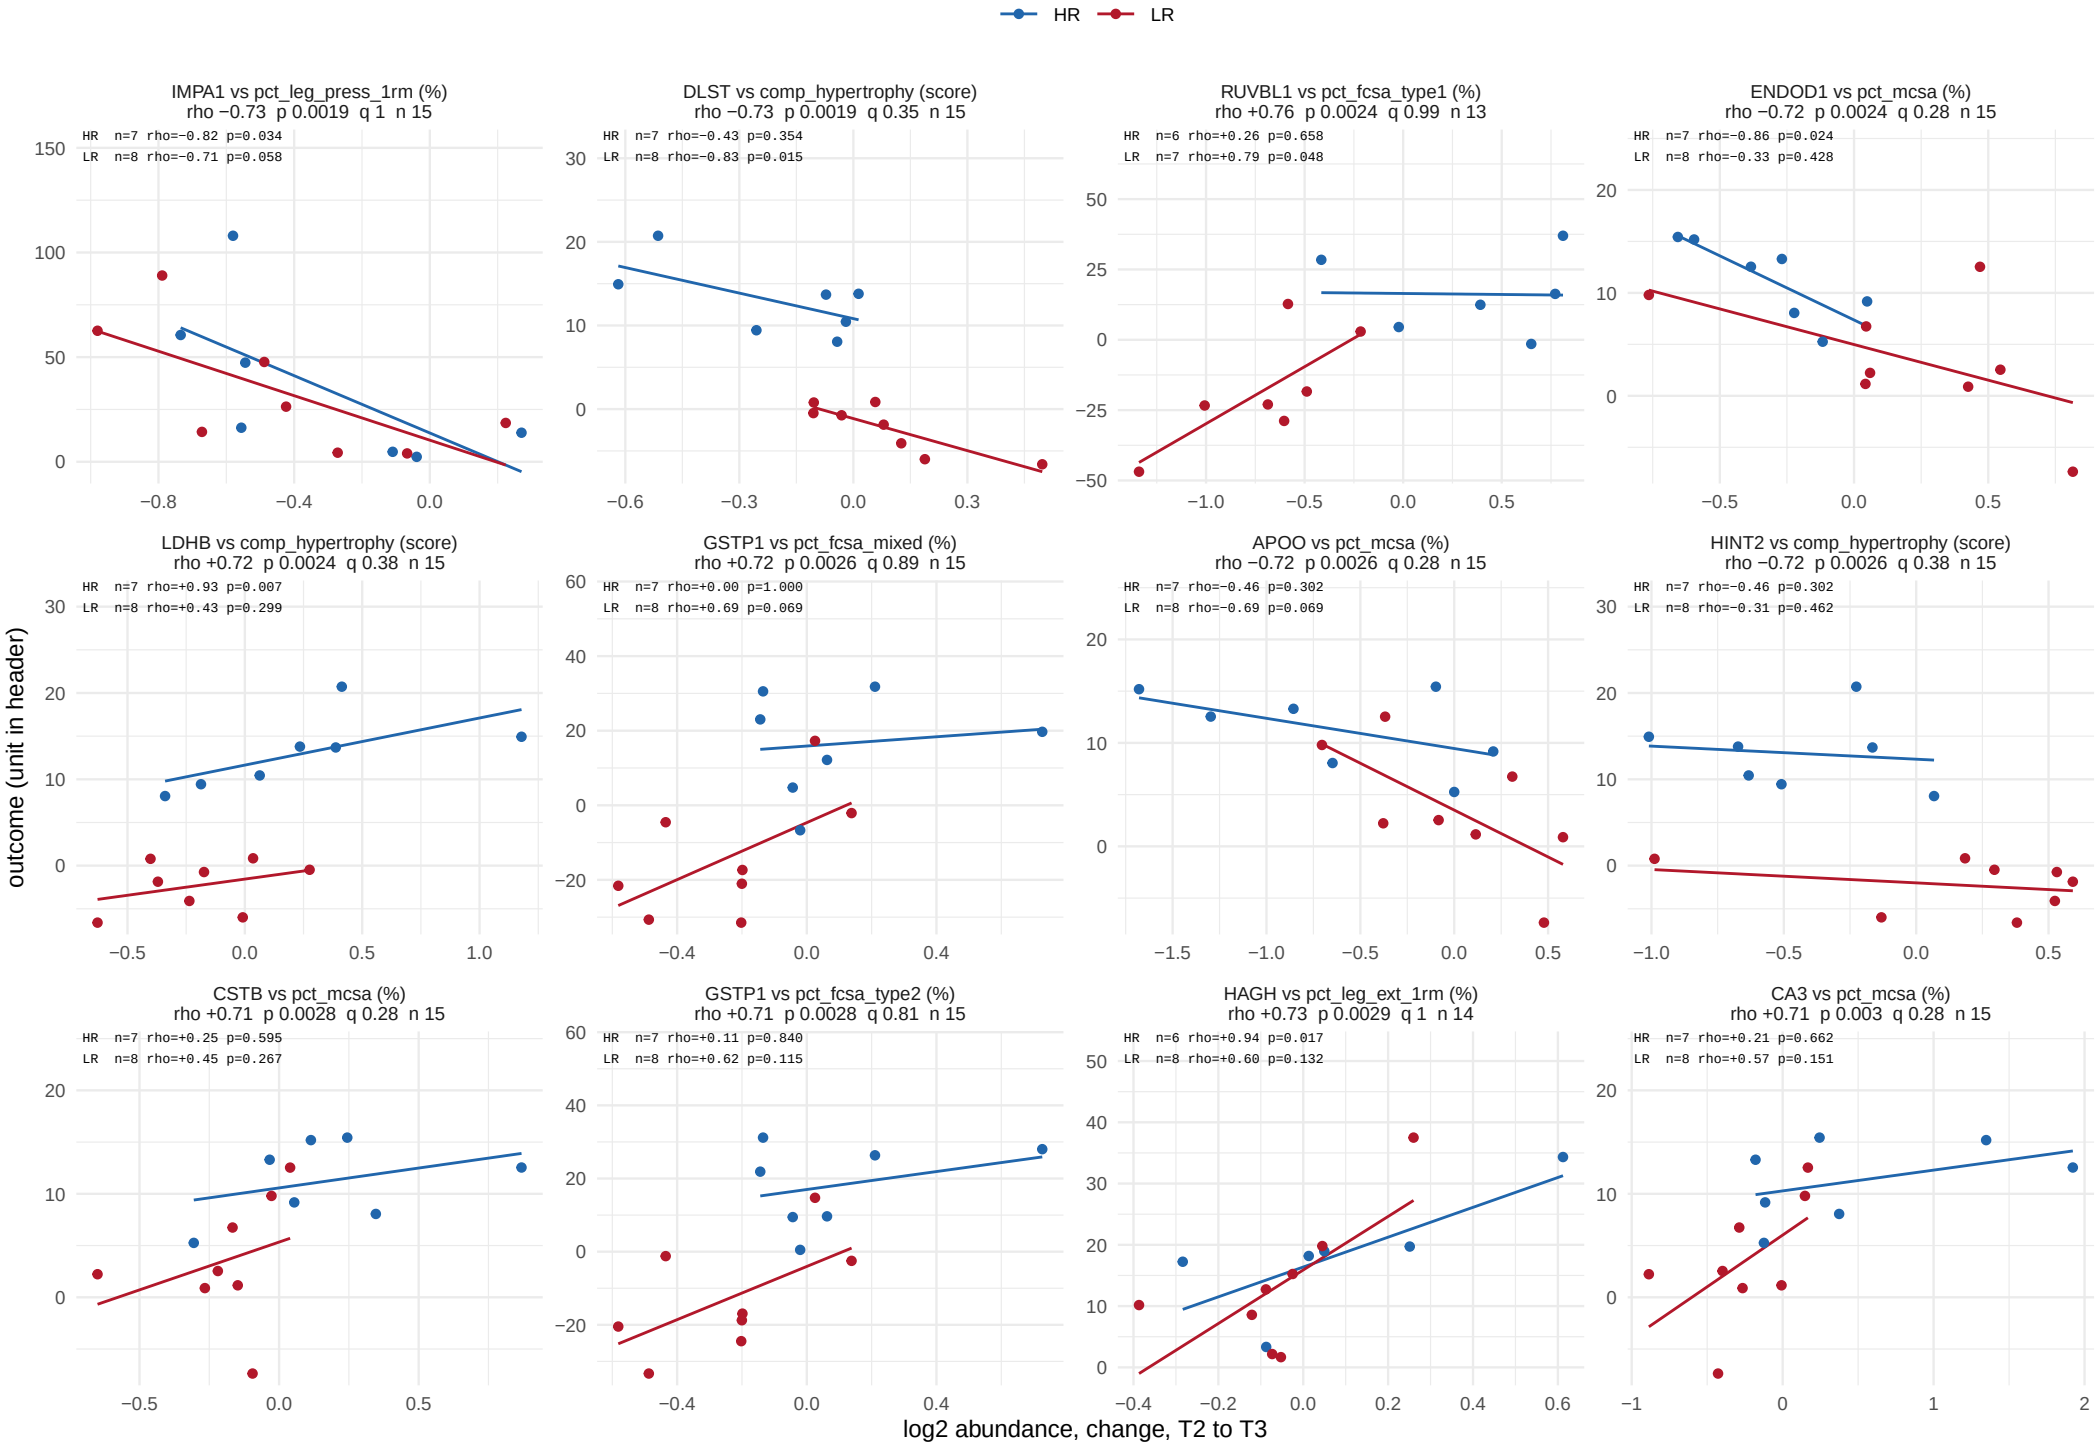

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


610 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 4 of 51.



One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


610 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 5 of 51.

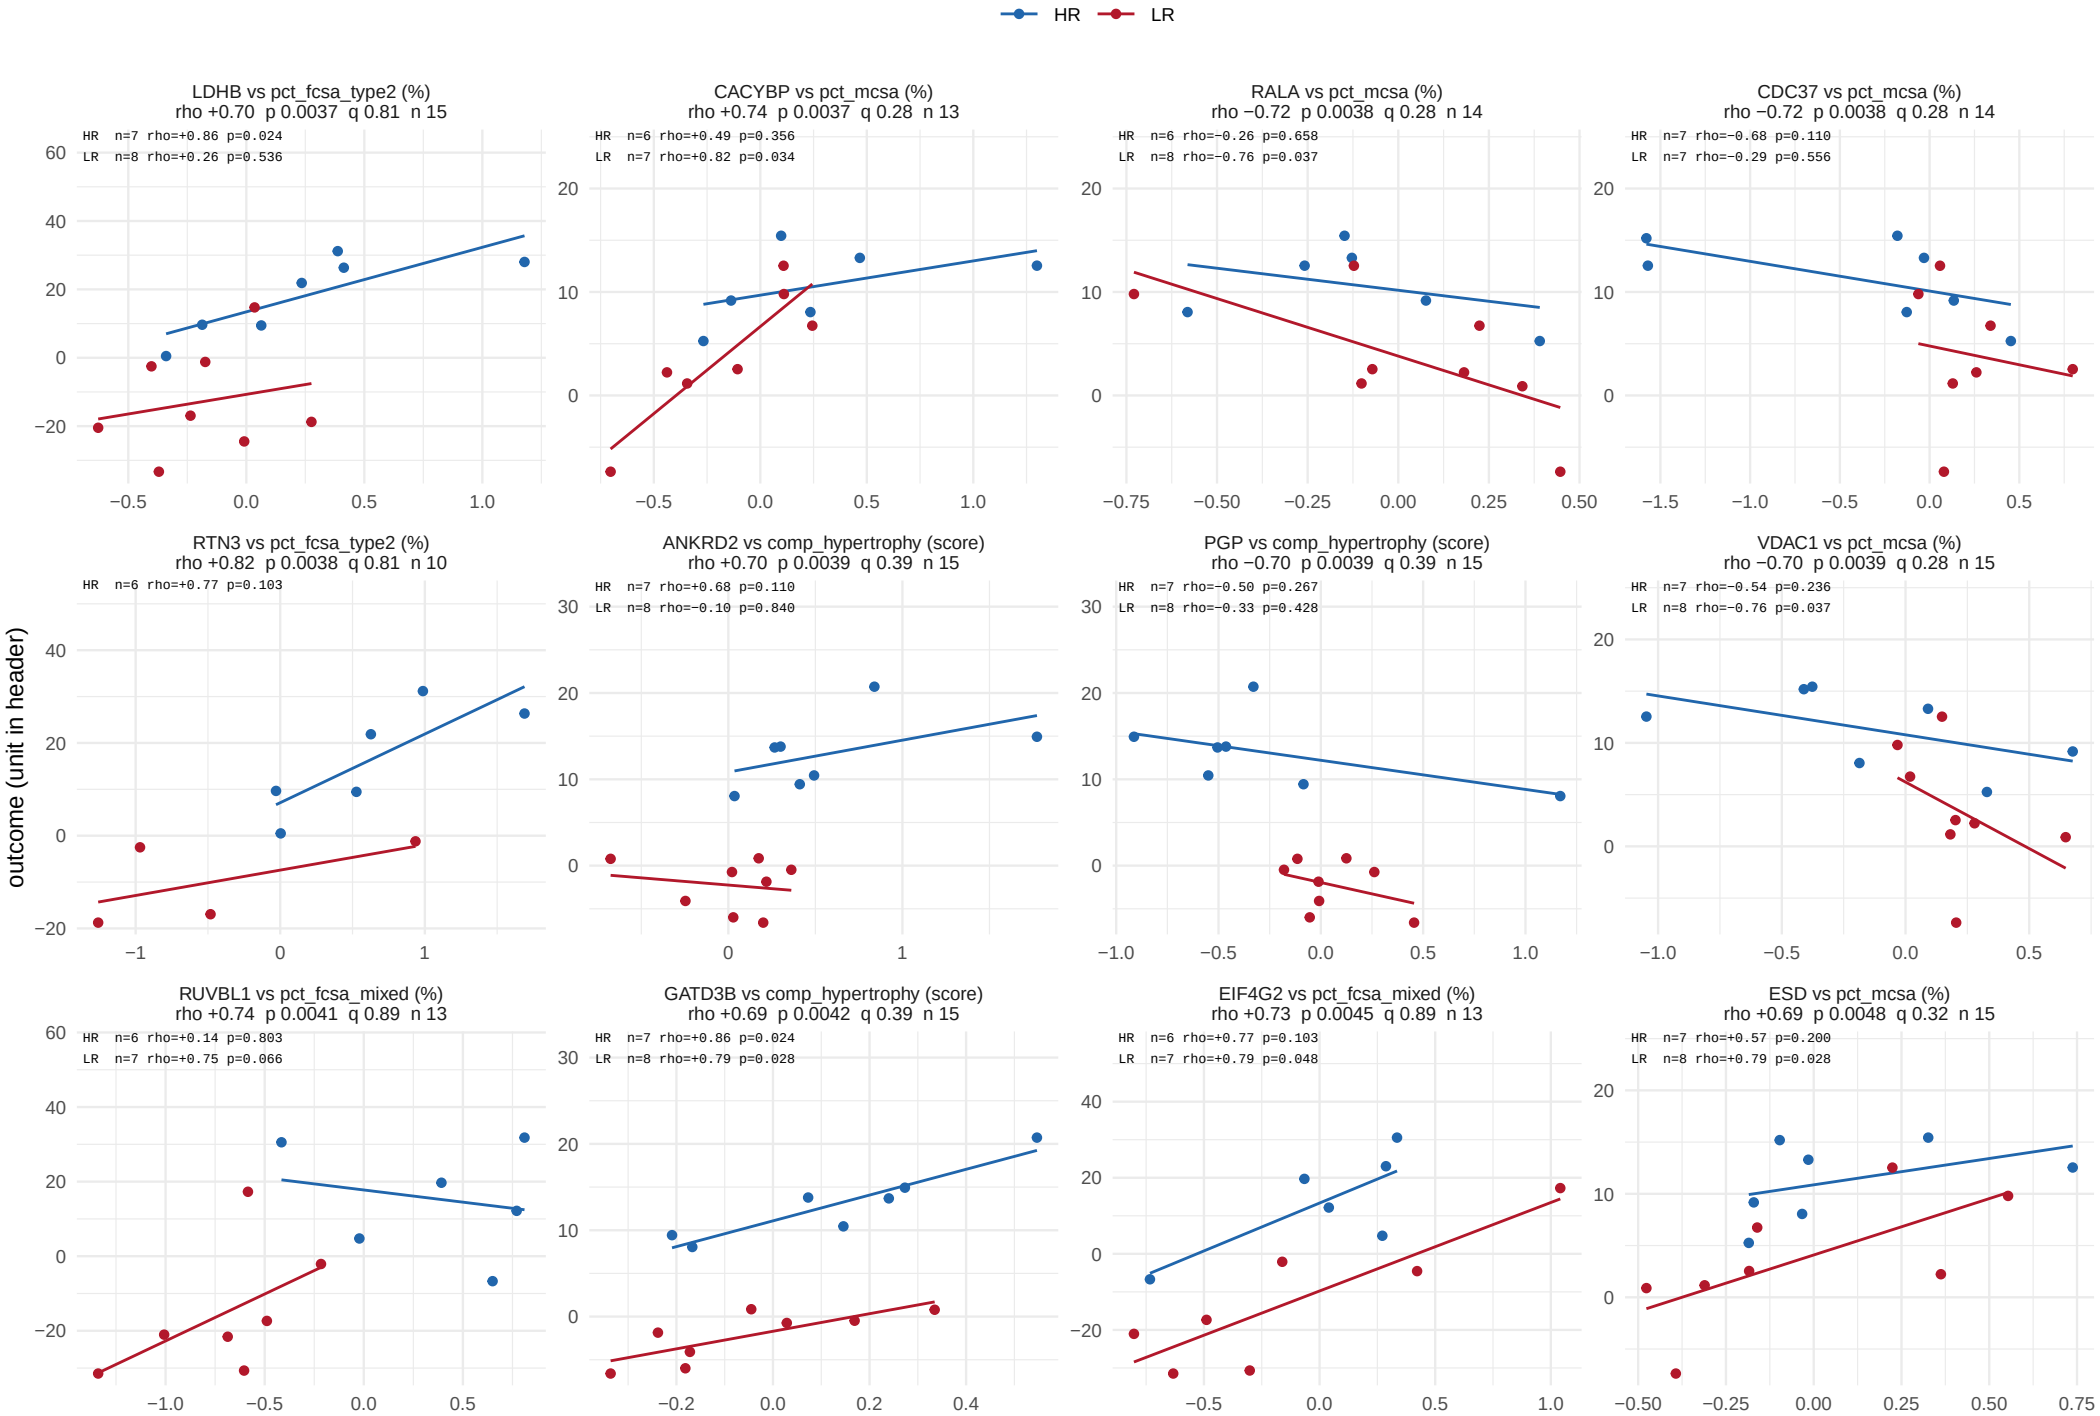

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


610 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 6 of 51.

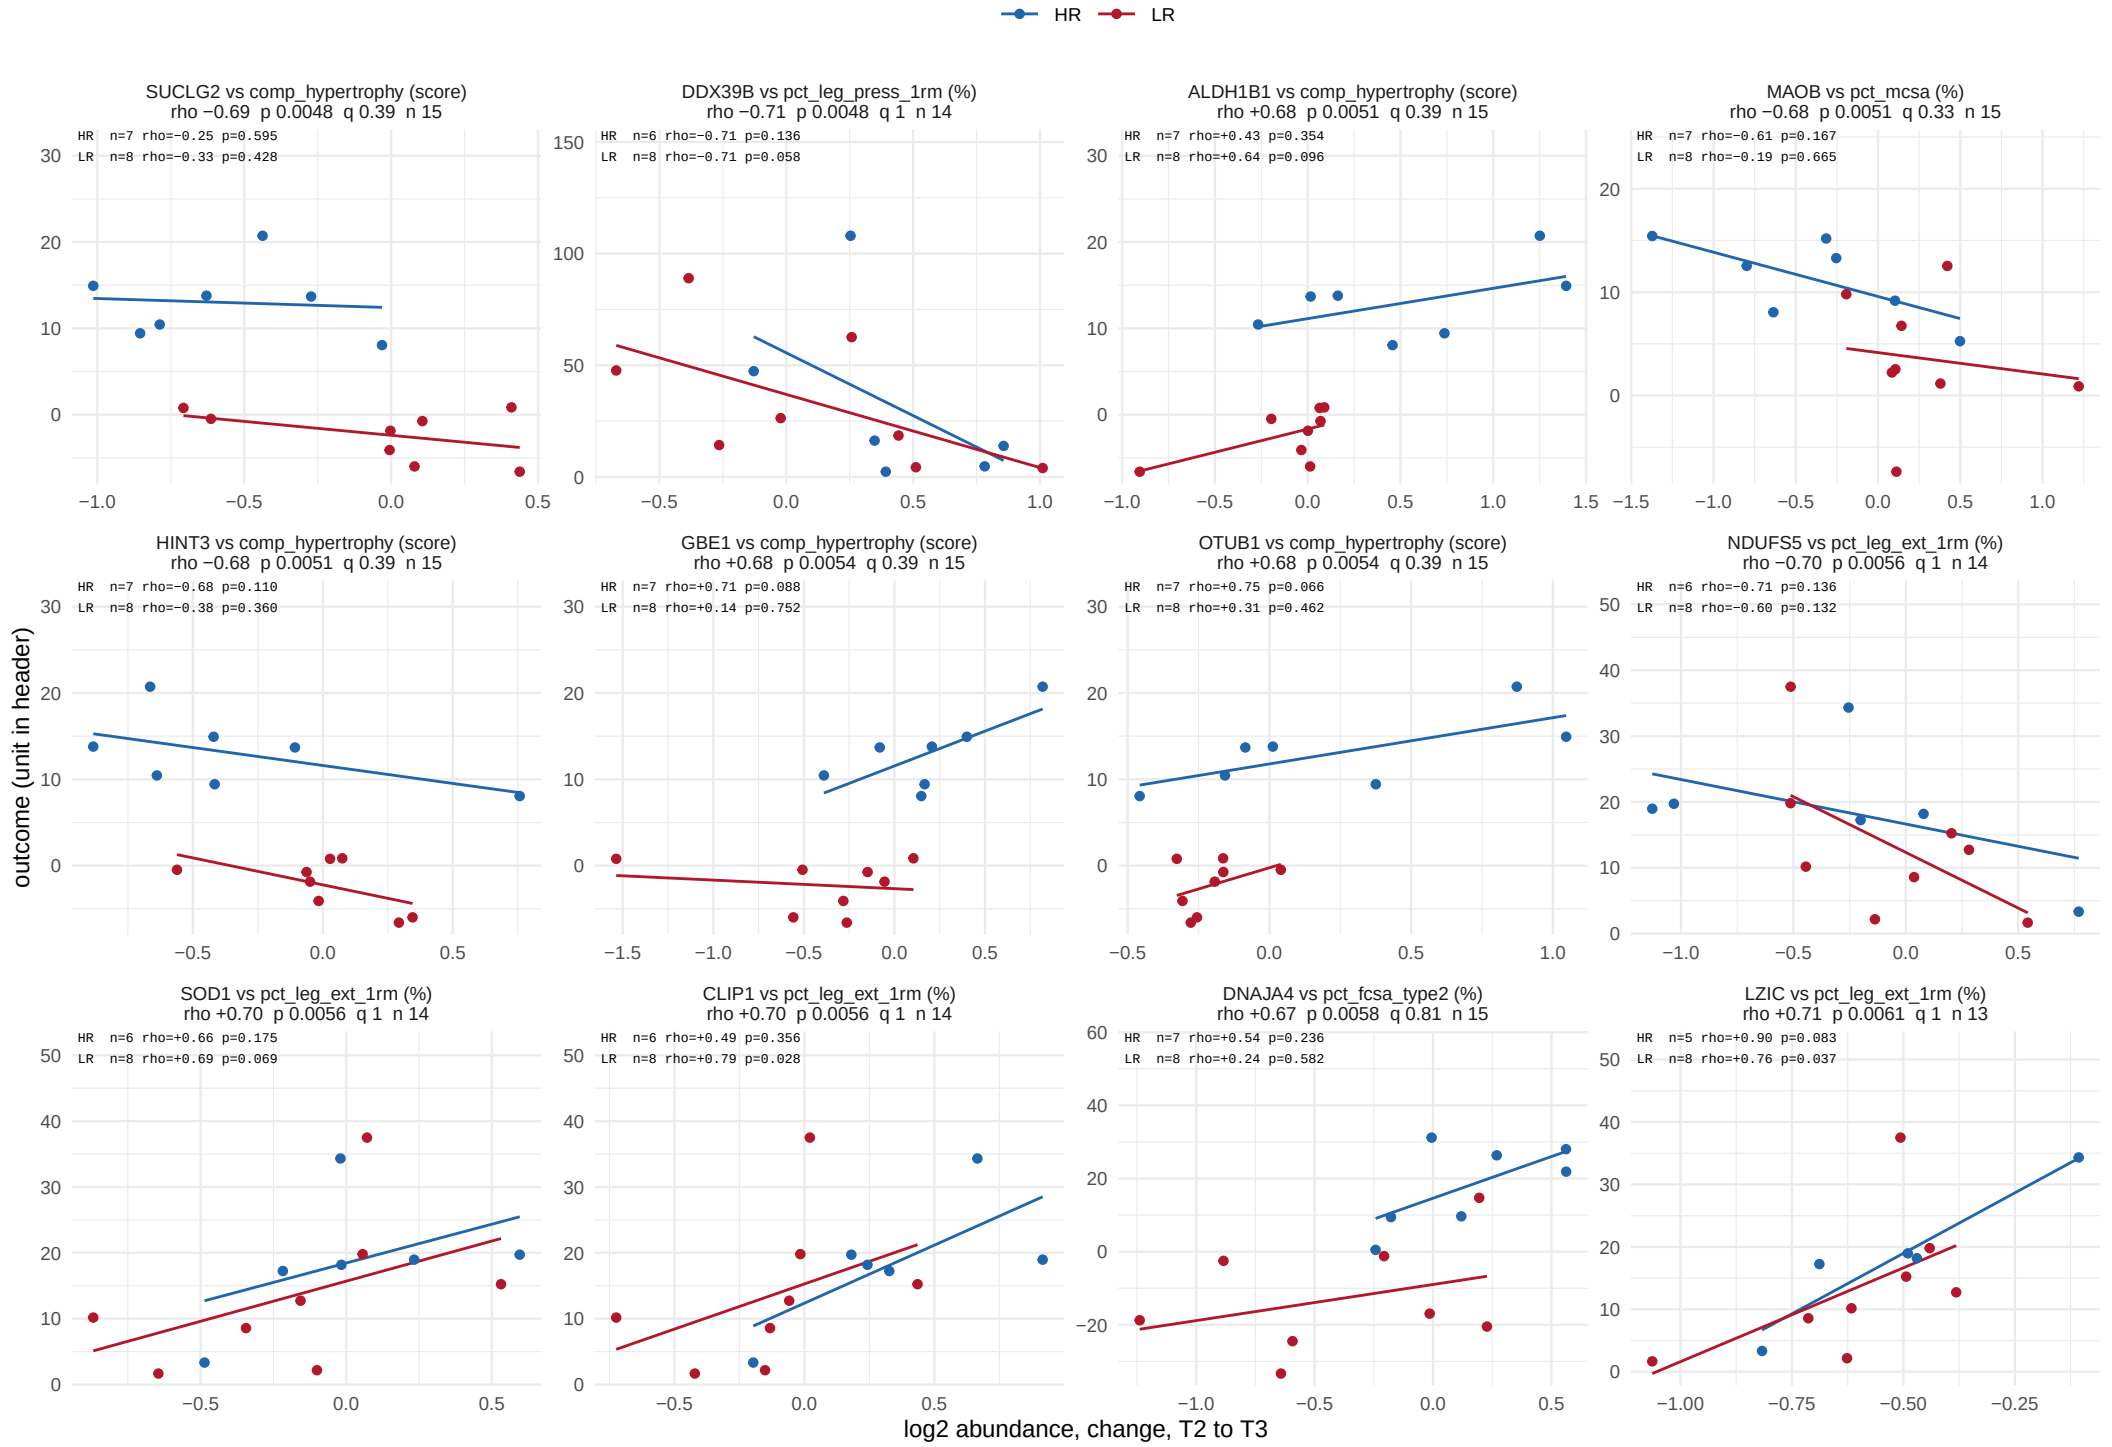

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


610 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 7 of 51.

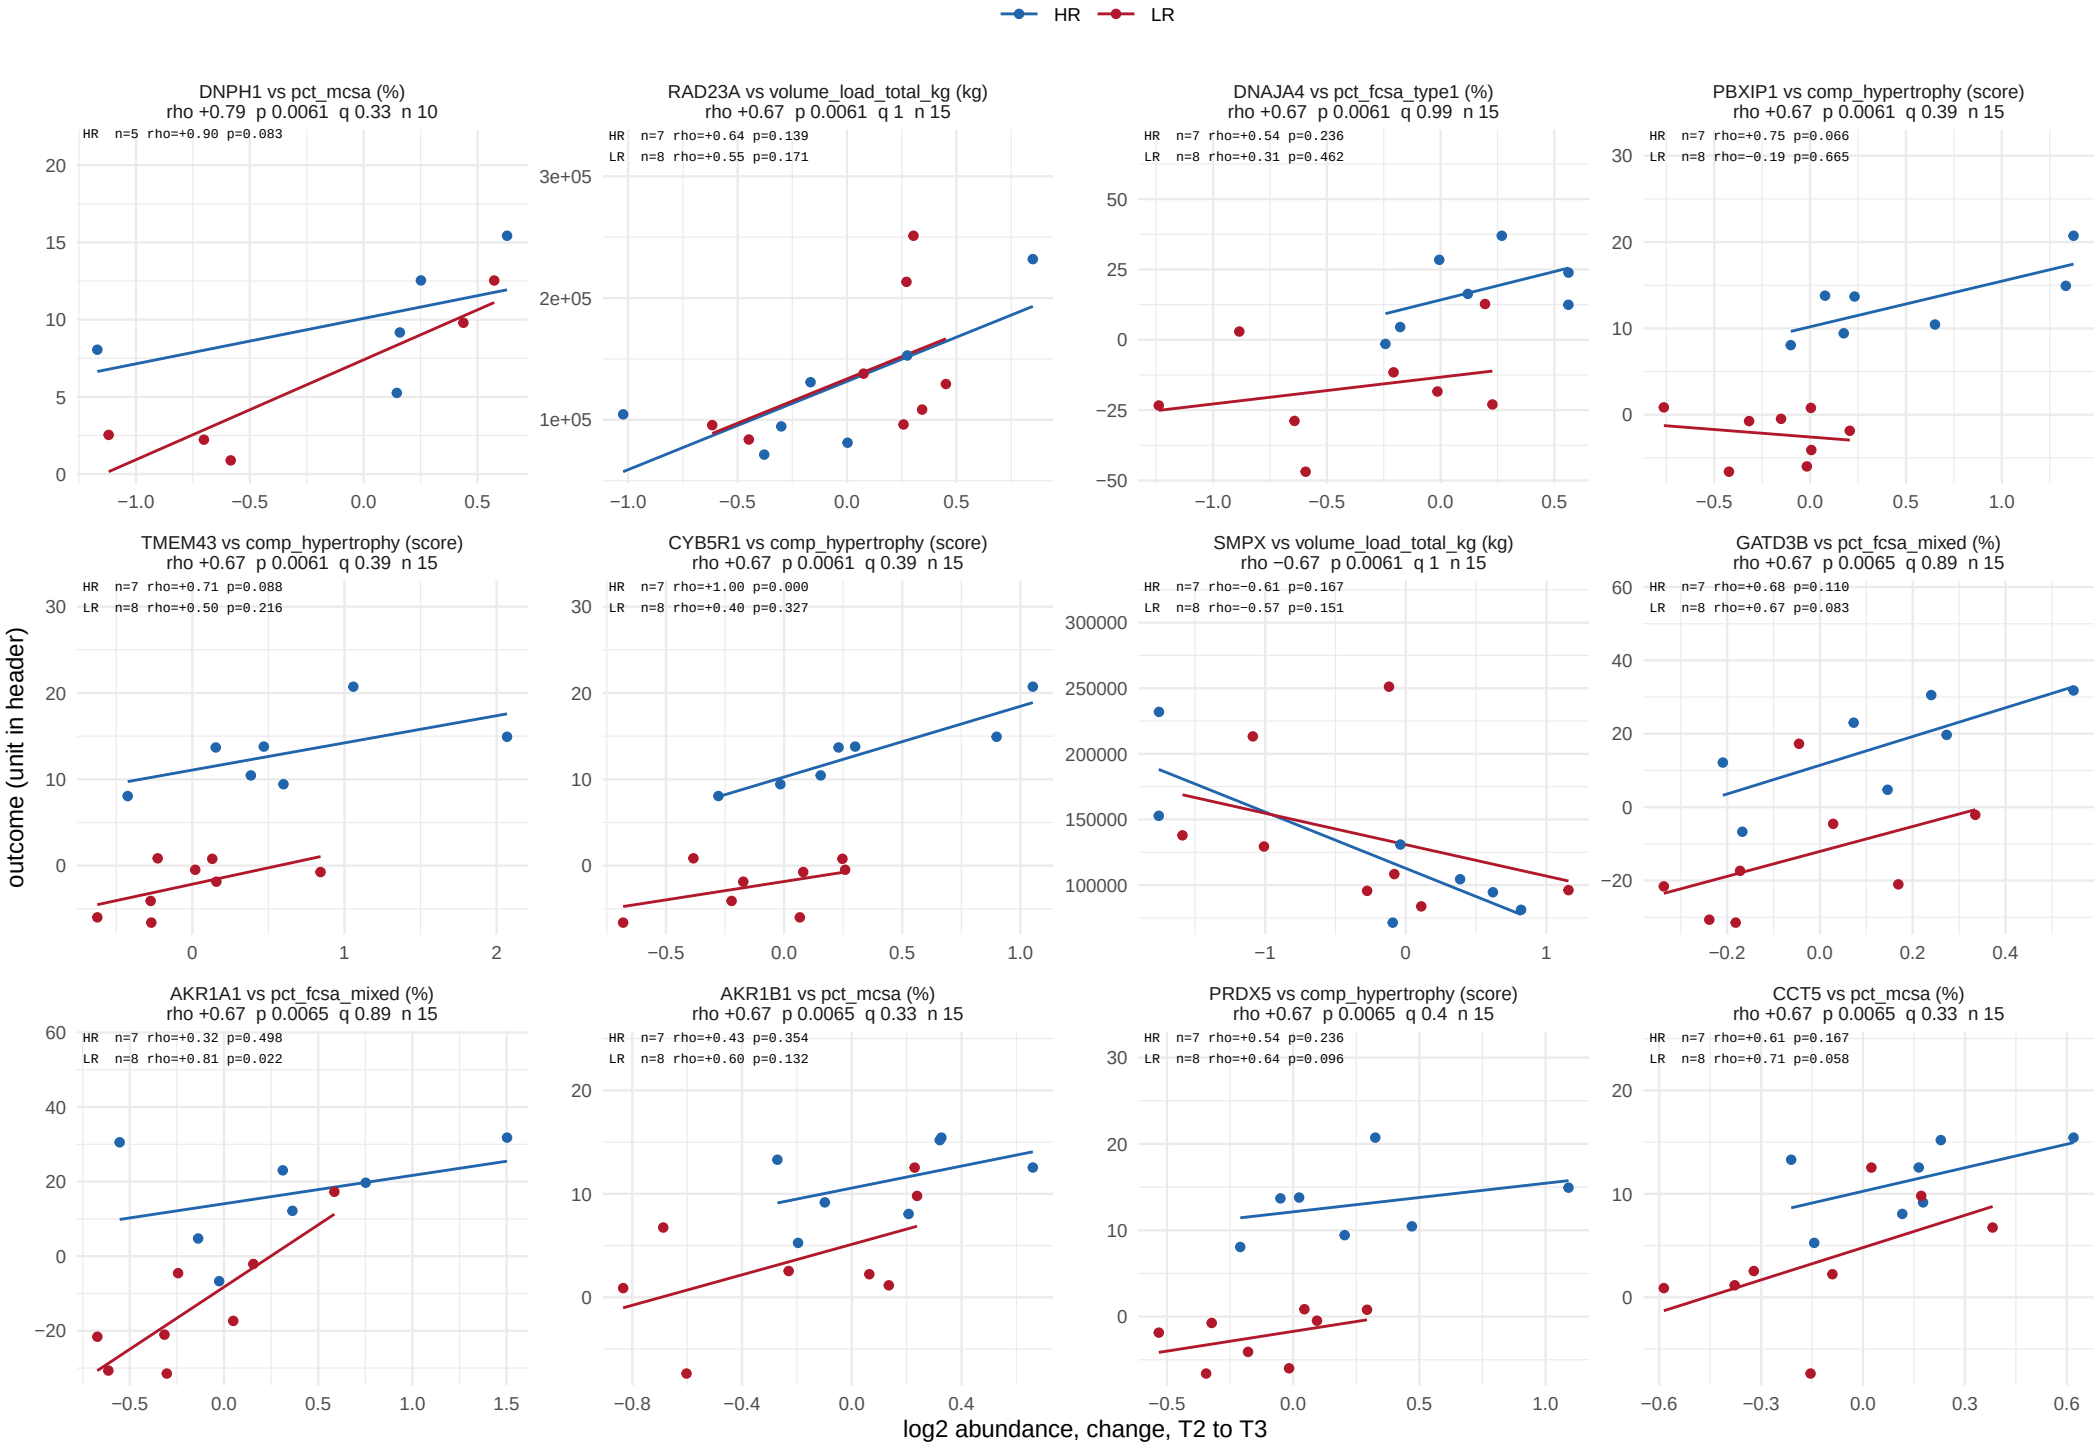

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


610 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 8 of 51.

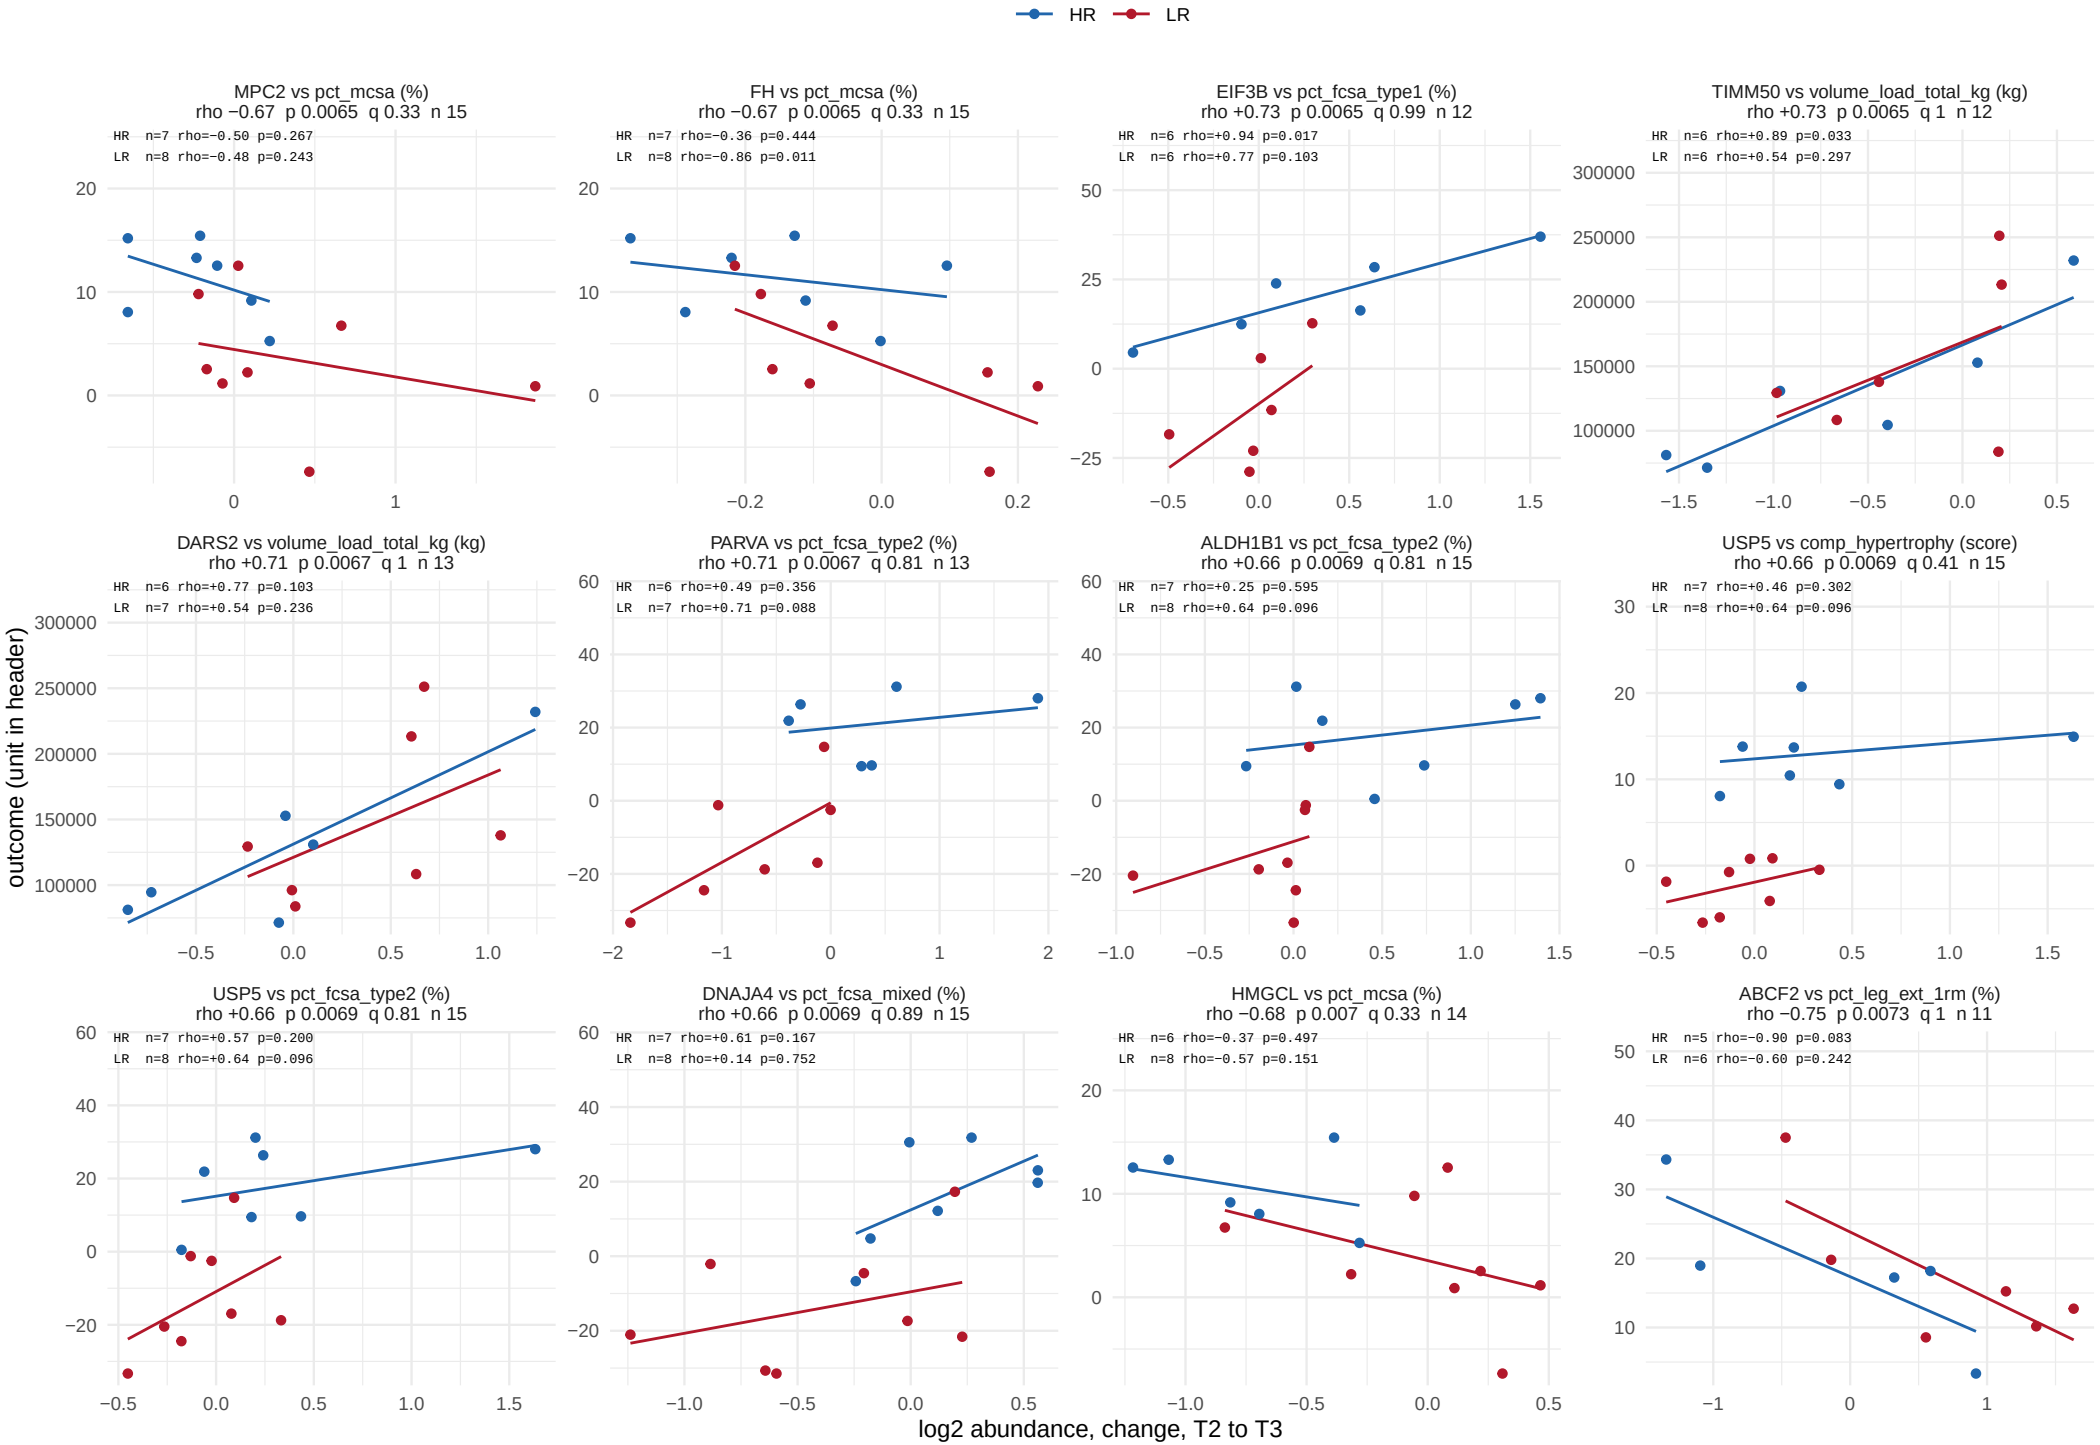

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


610 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 9 of 51.

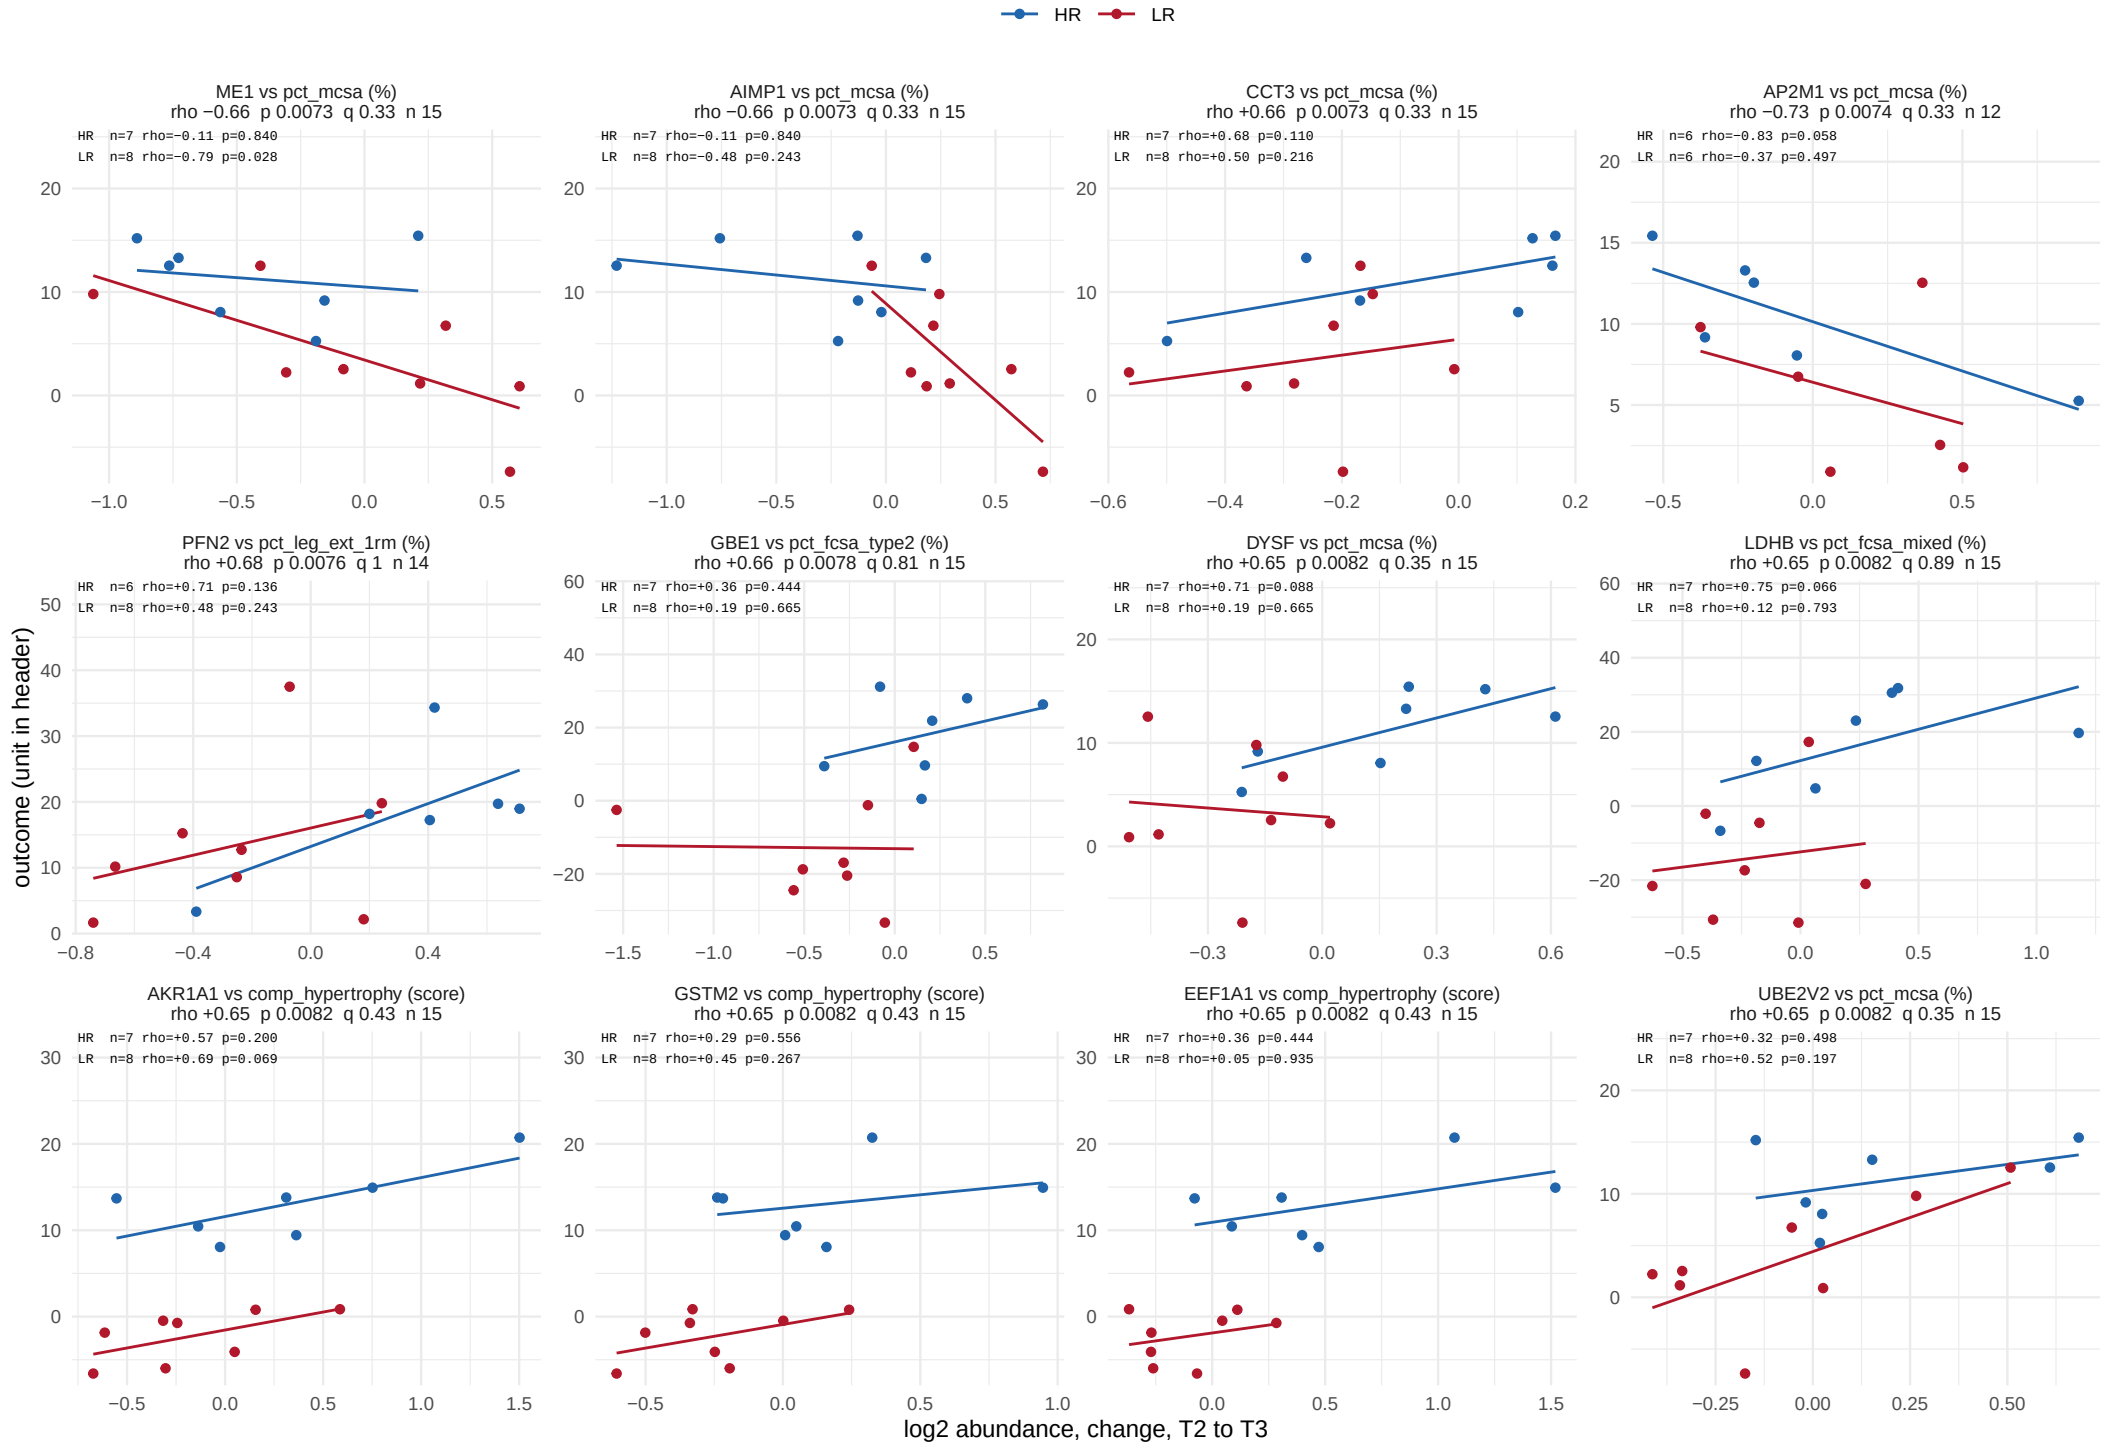

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


610 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 10 of 51.

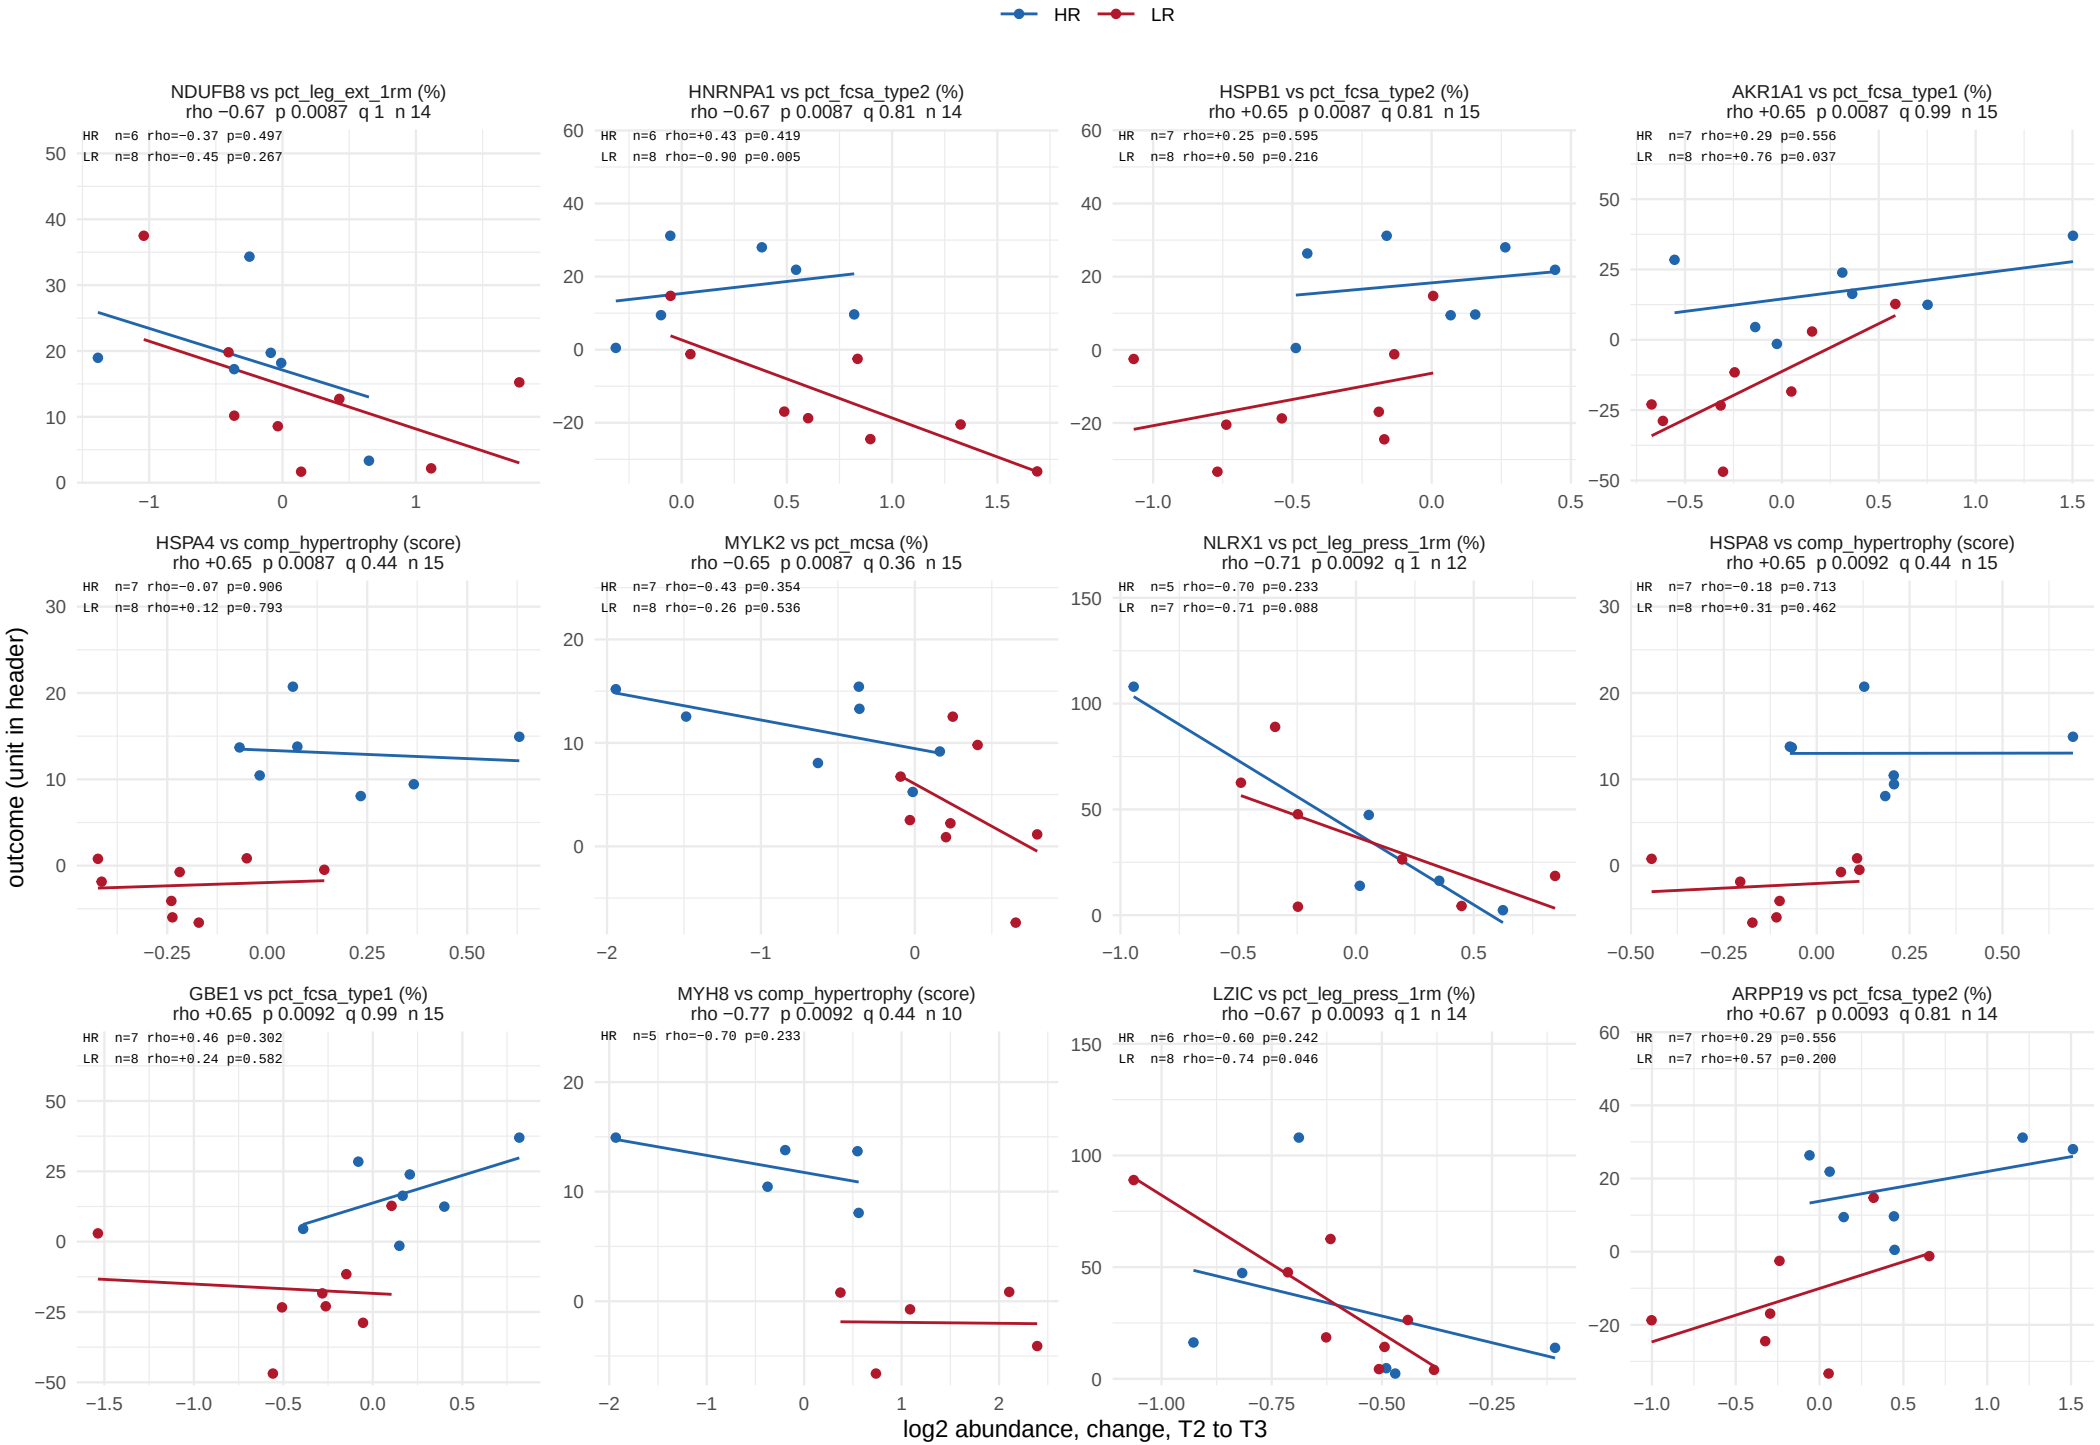

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


610 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 11 of 51.

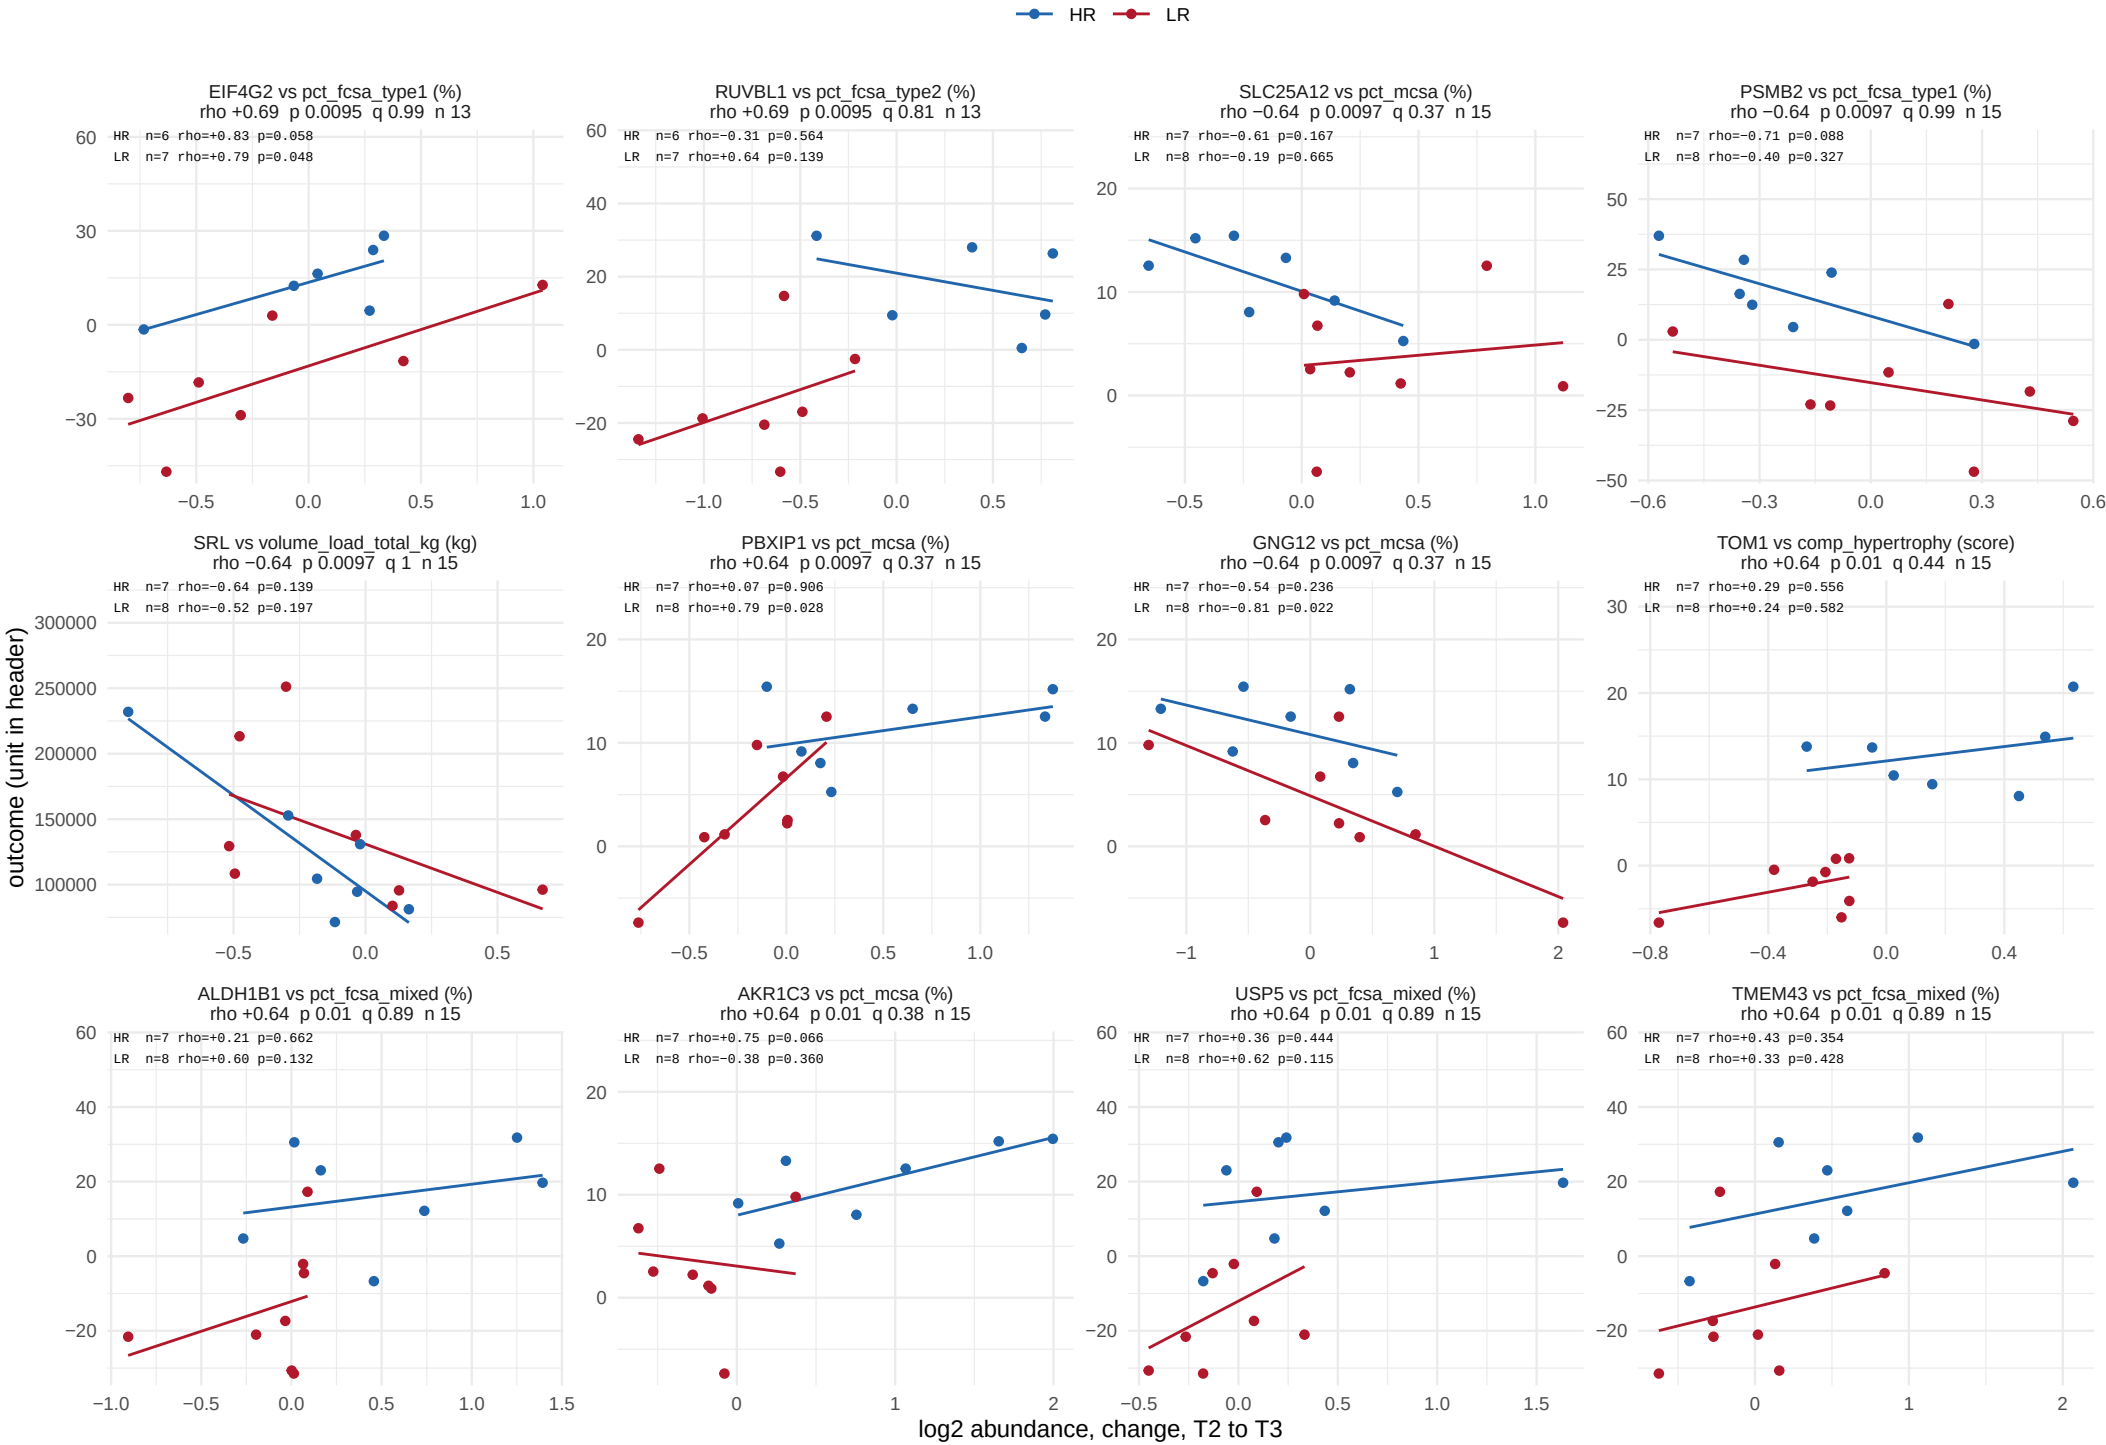

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


610 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 12 of 51.

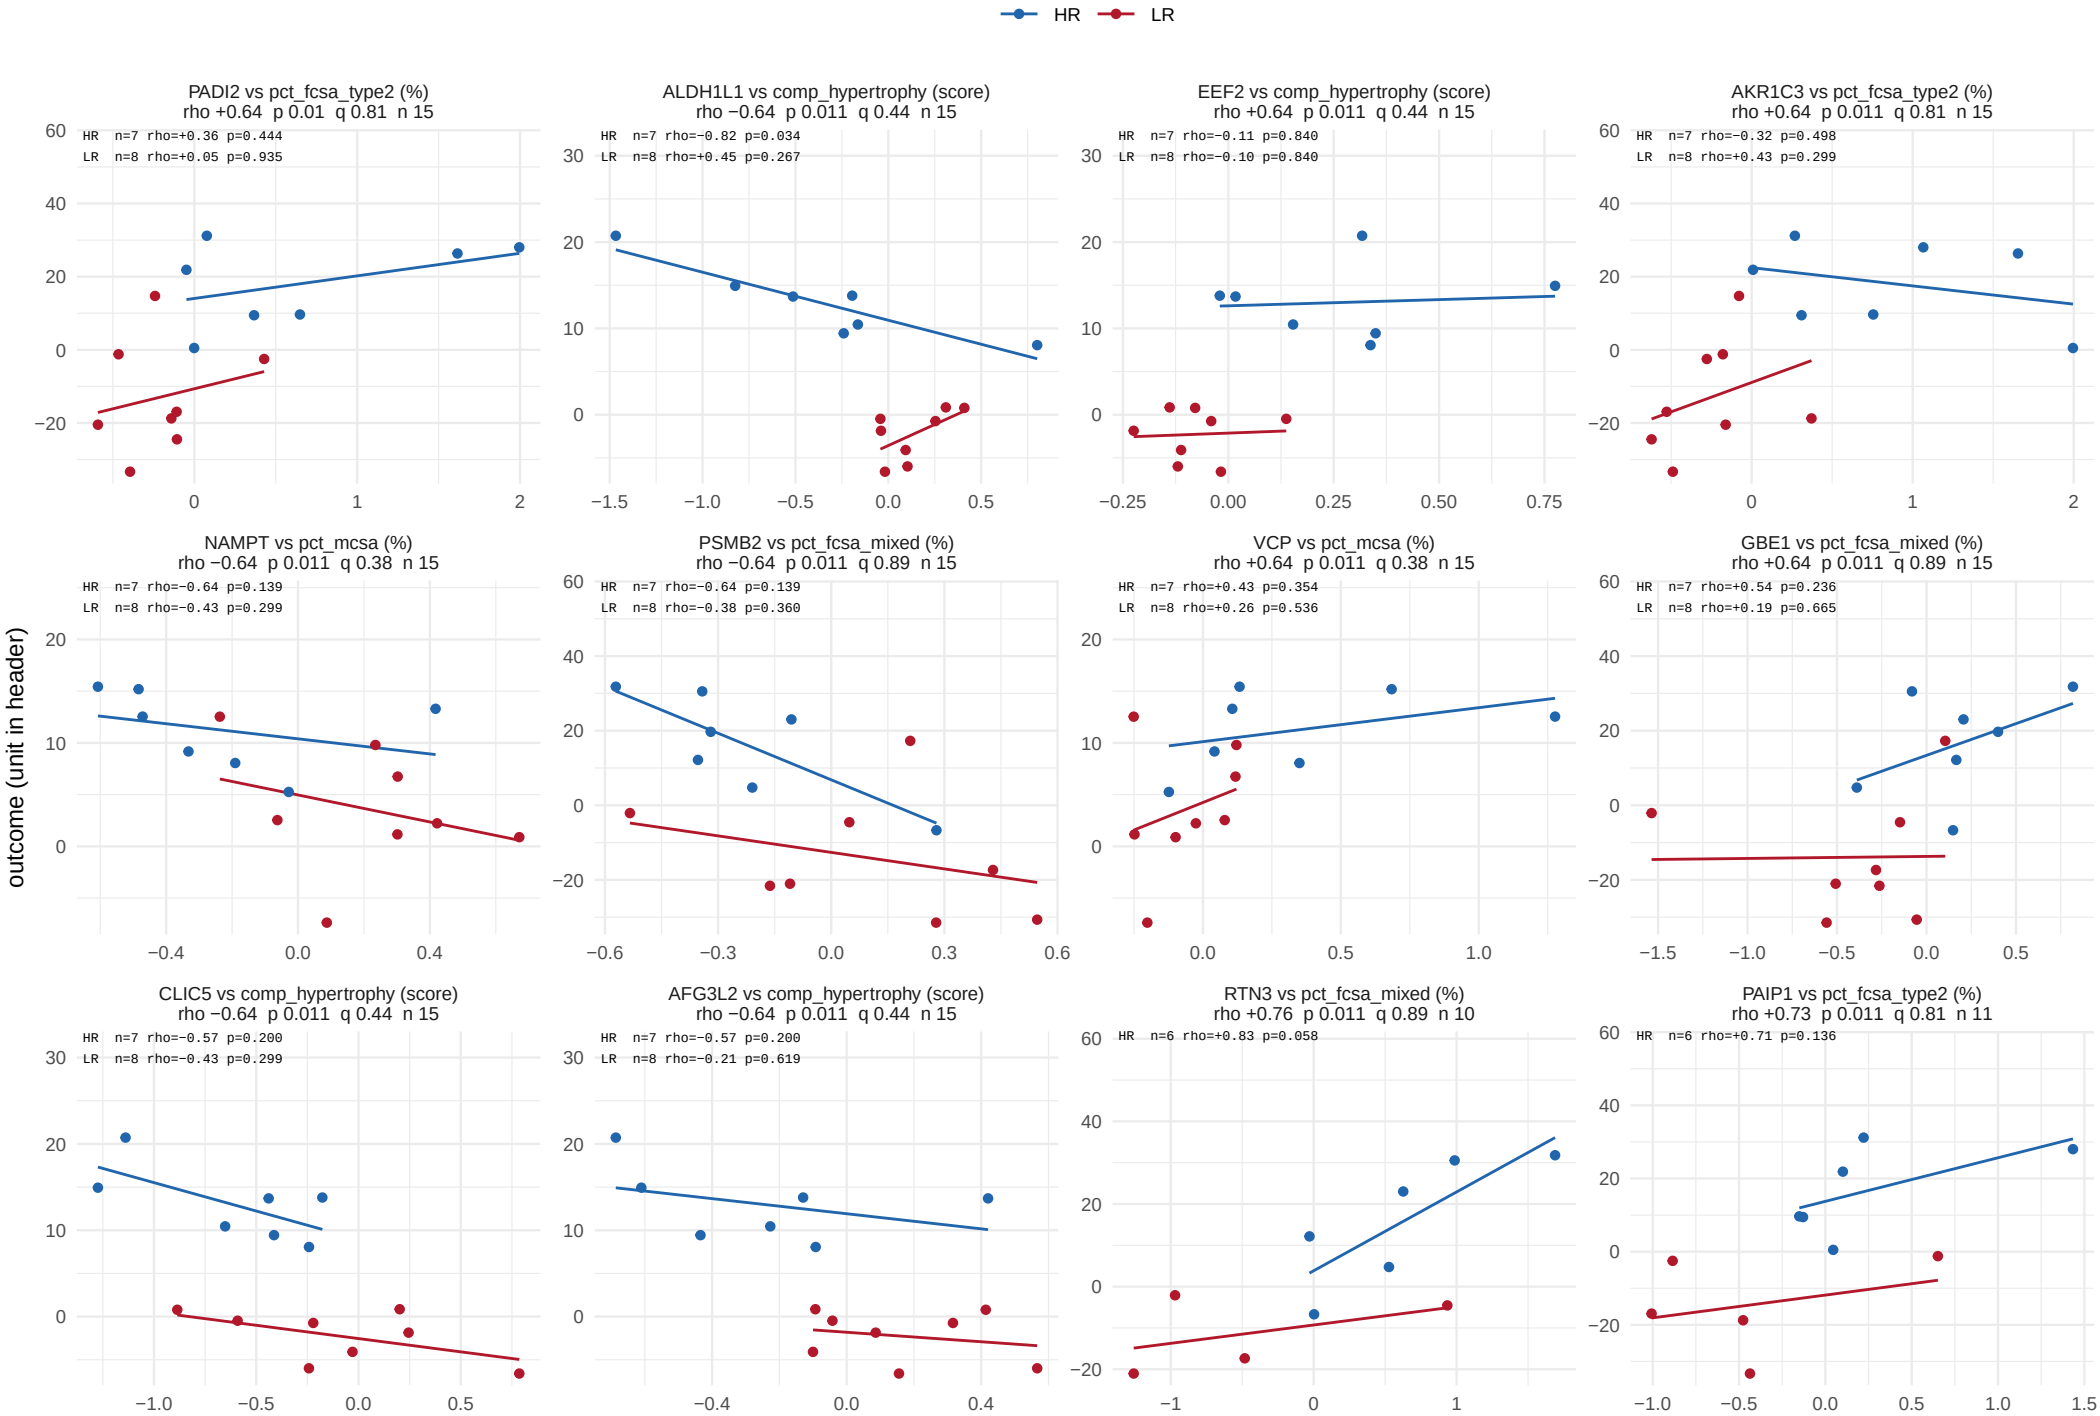

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


610 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 13 of 51.

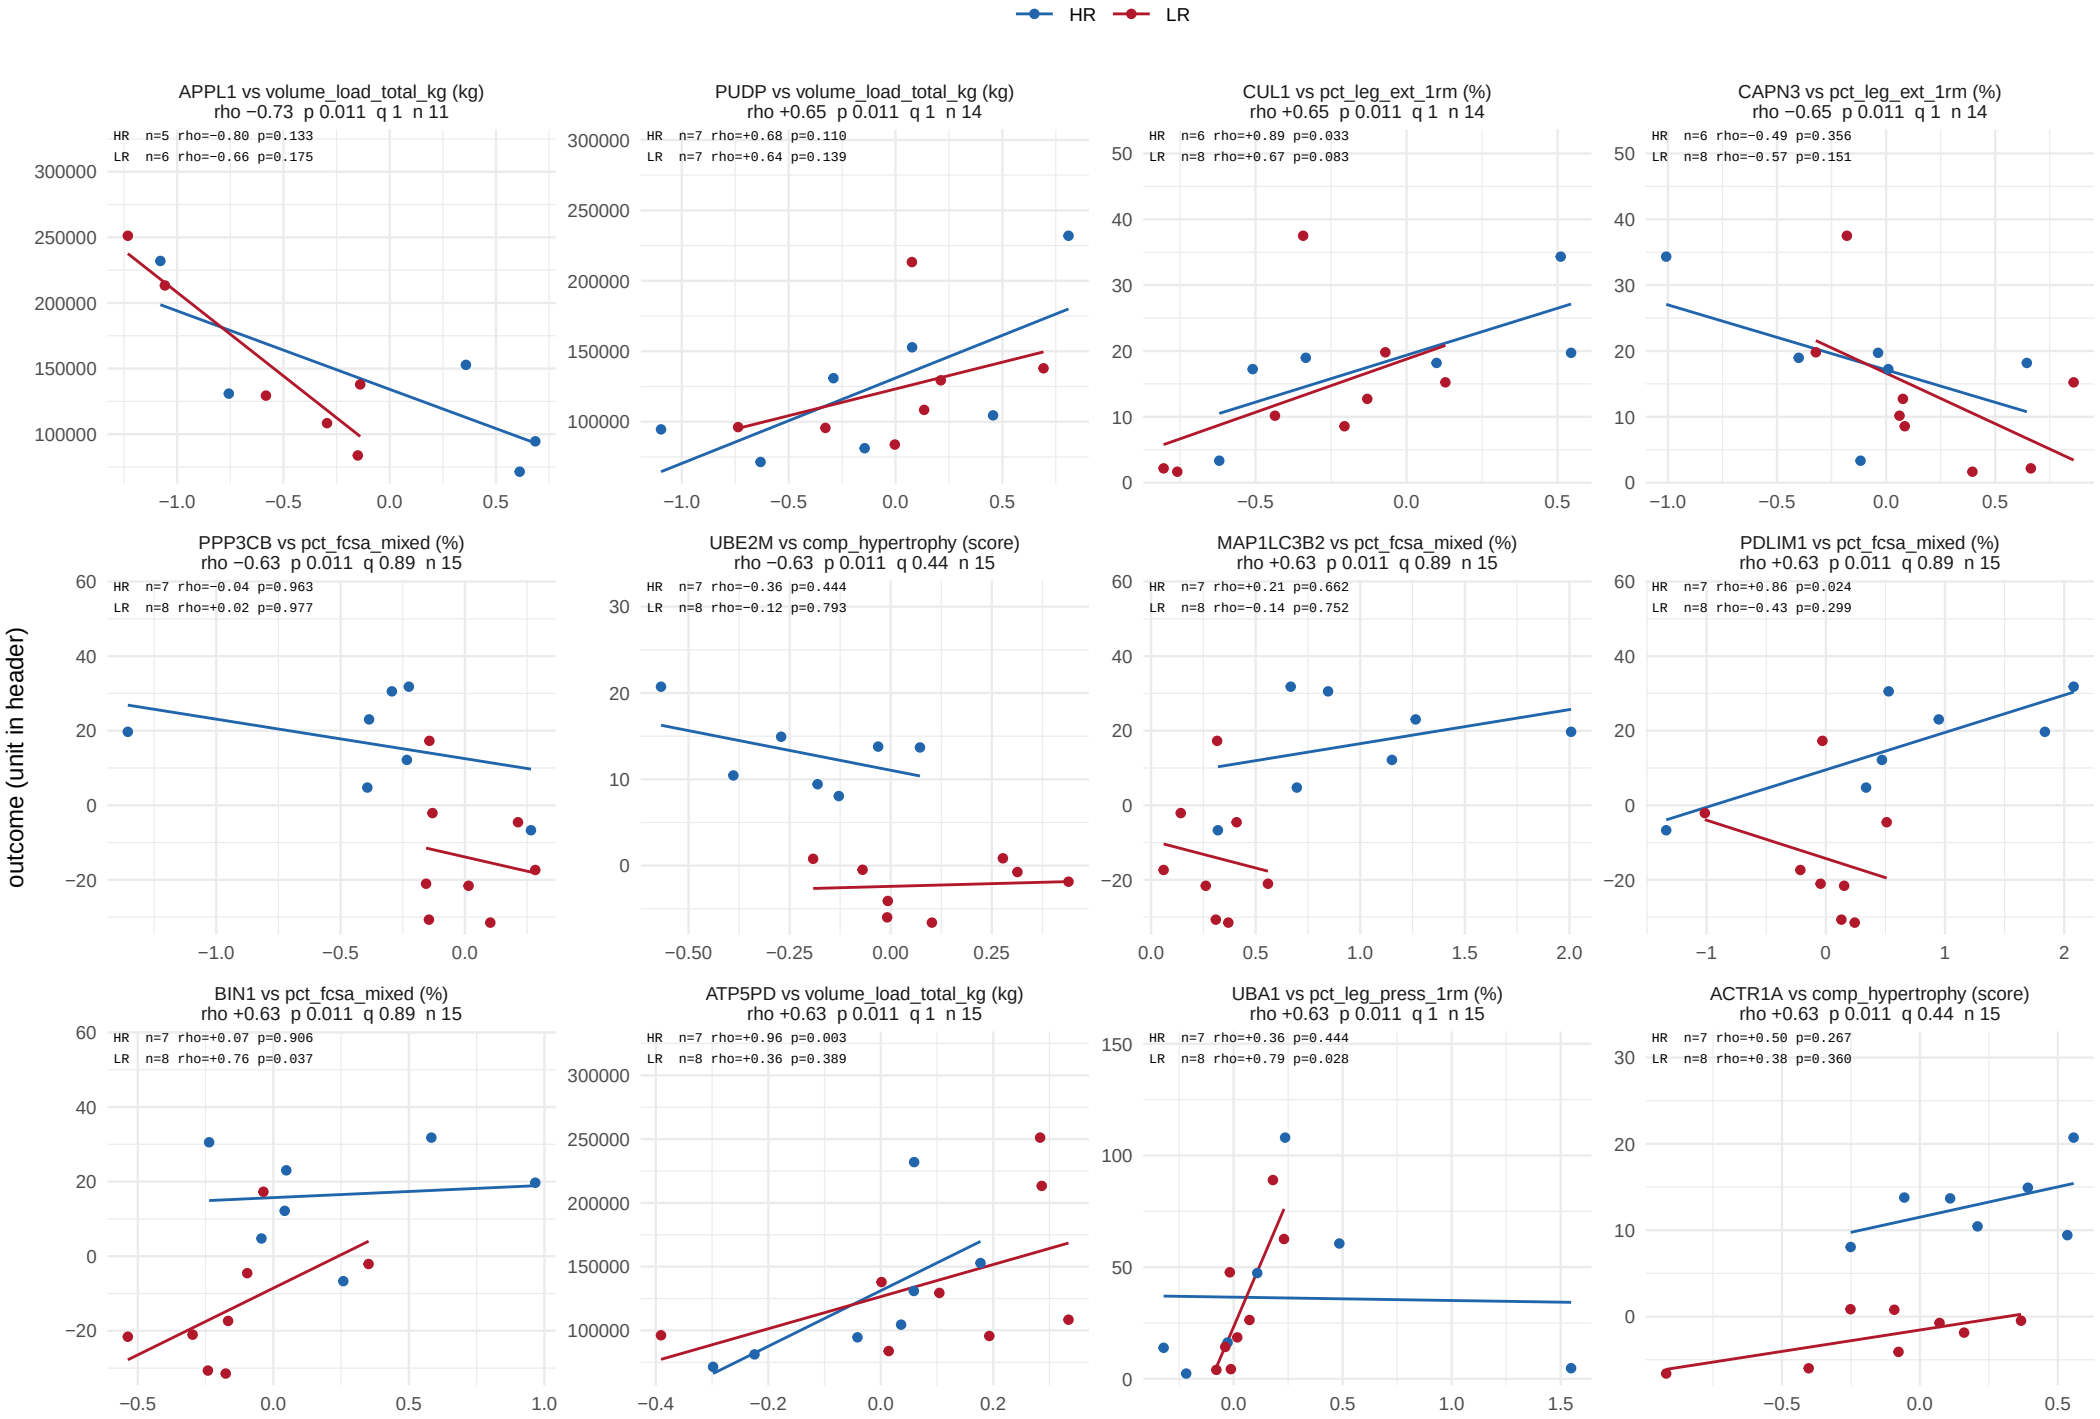

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


610 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 14 of 51.

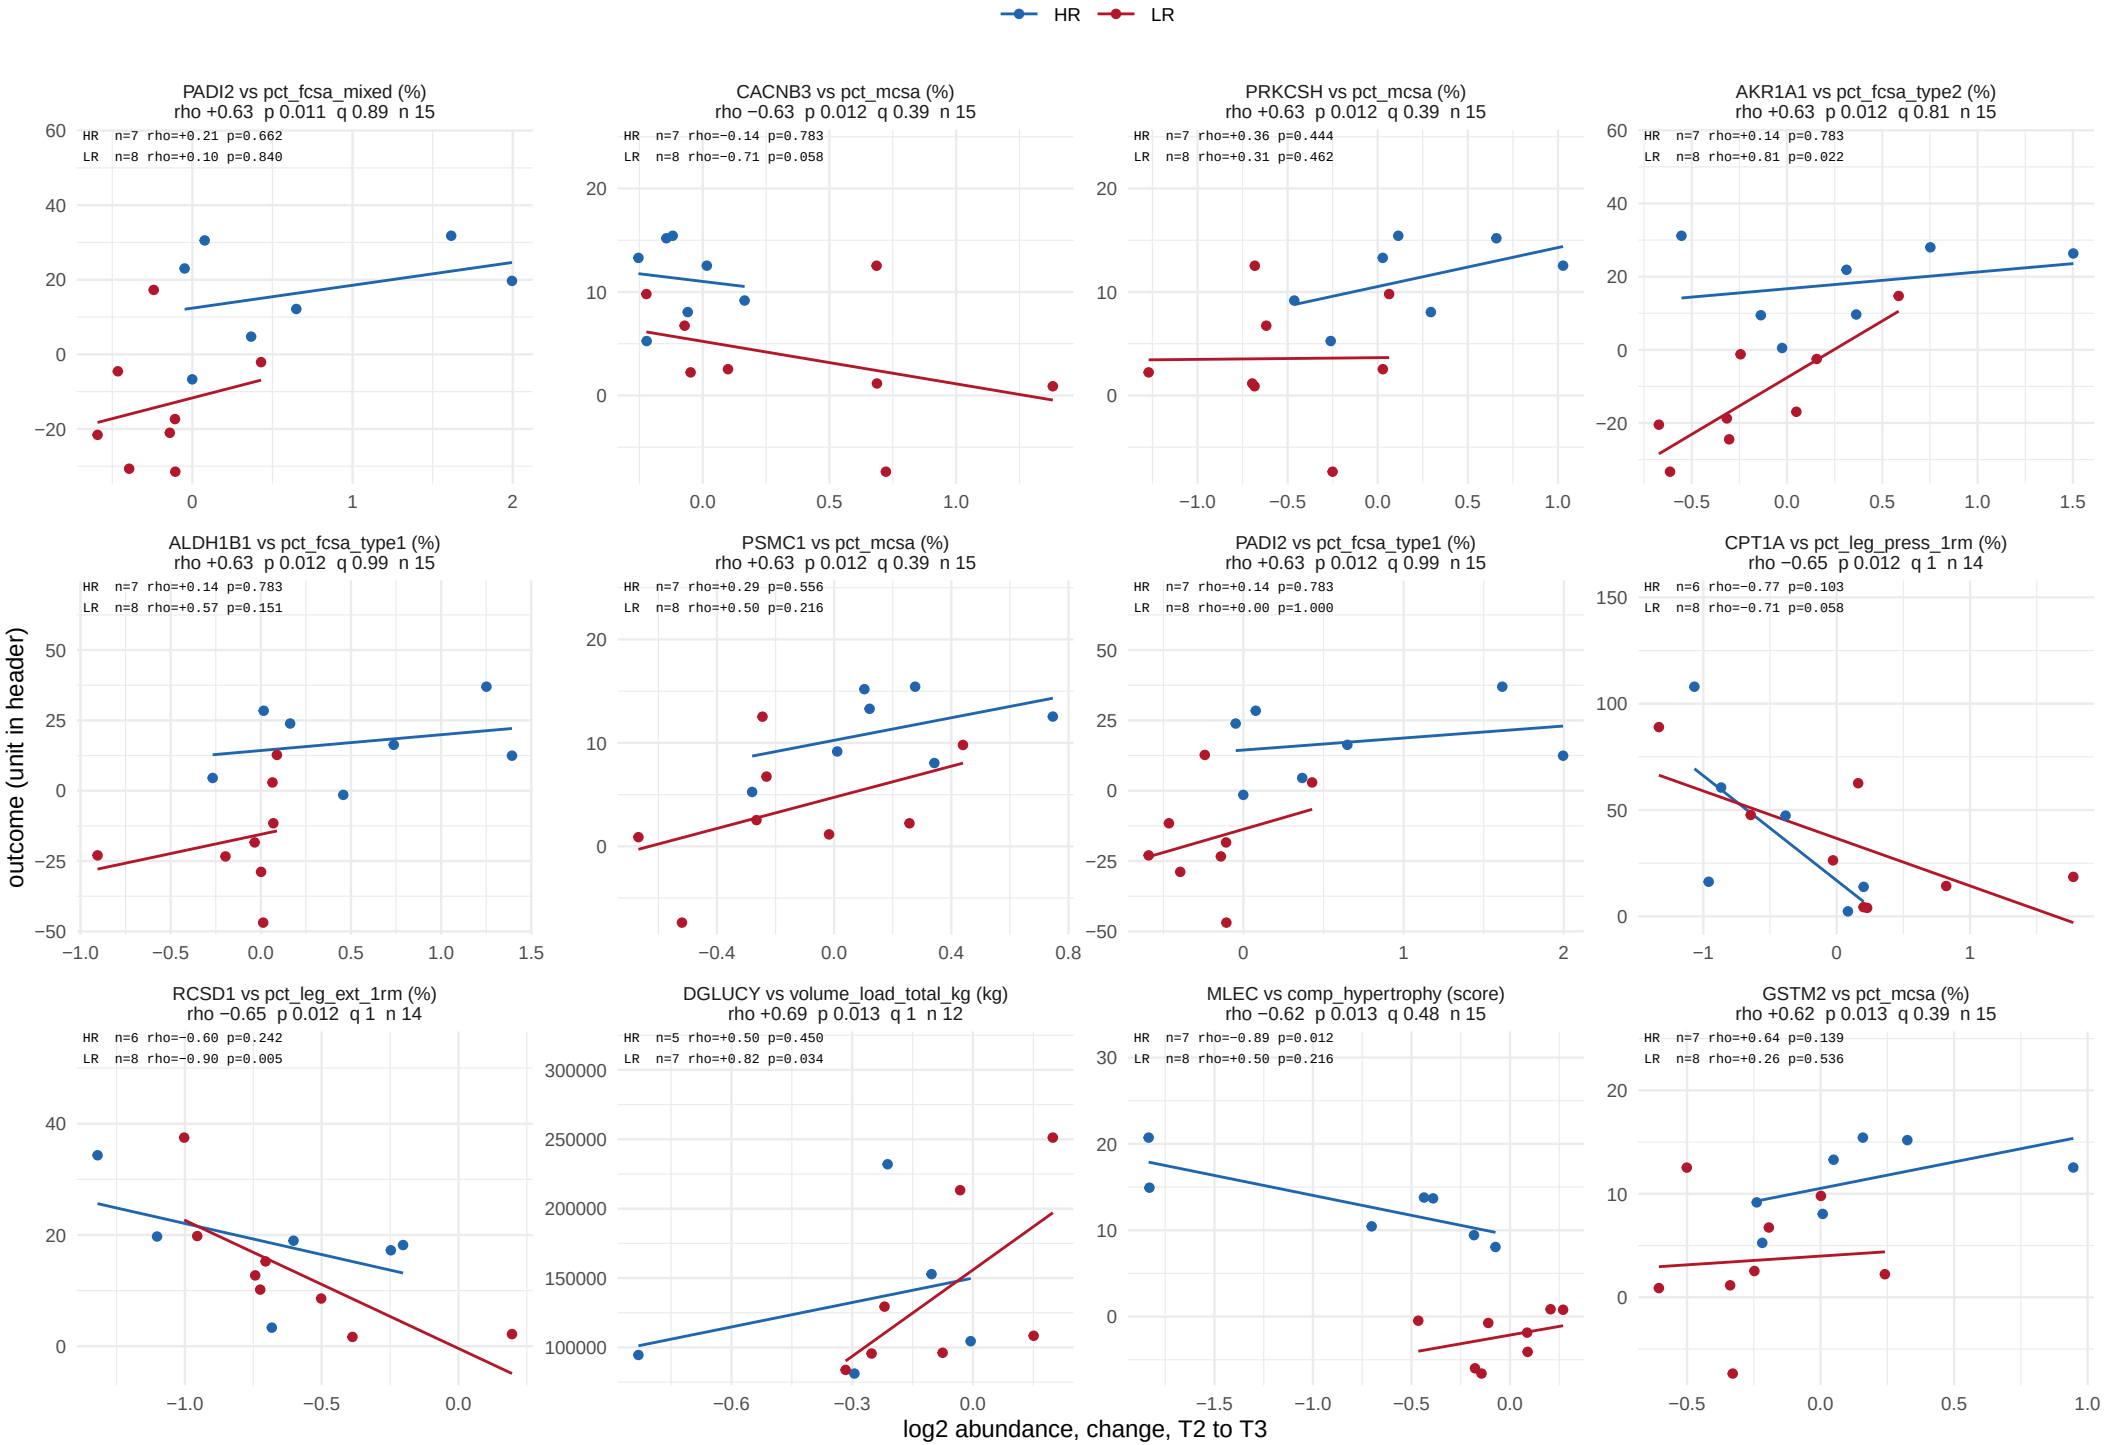

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


610 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 15 of 51.

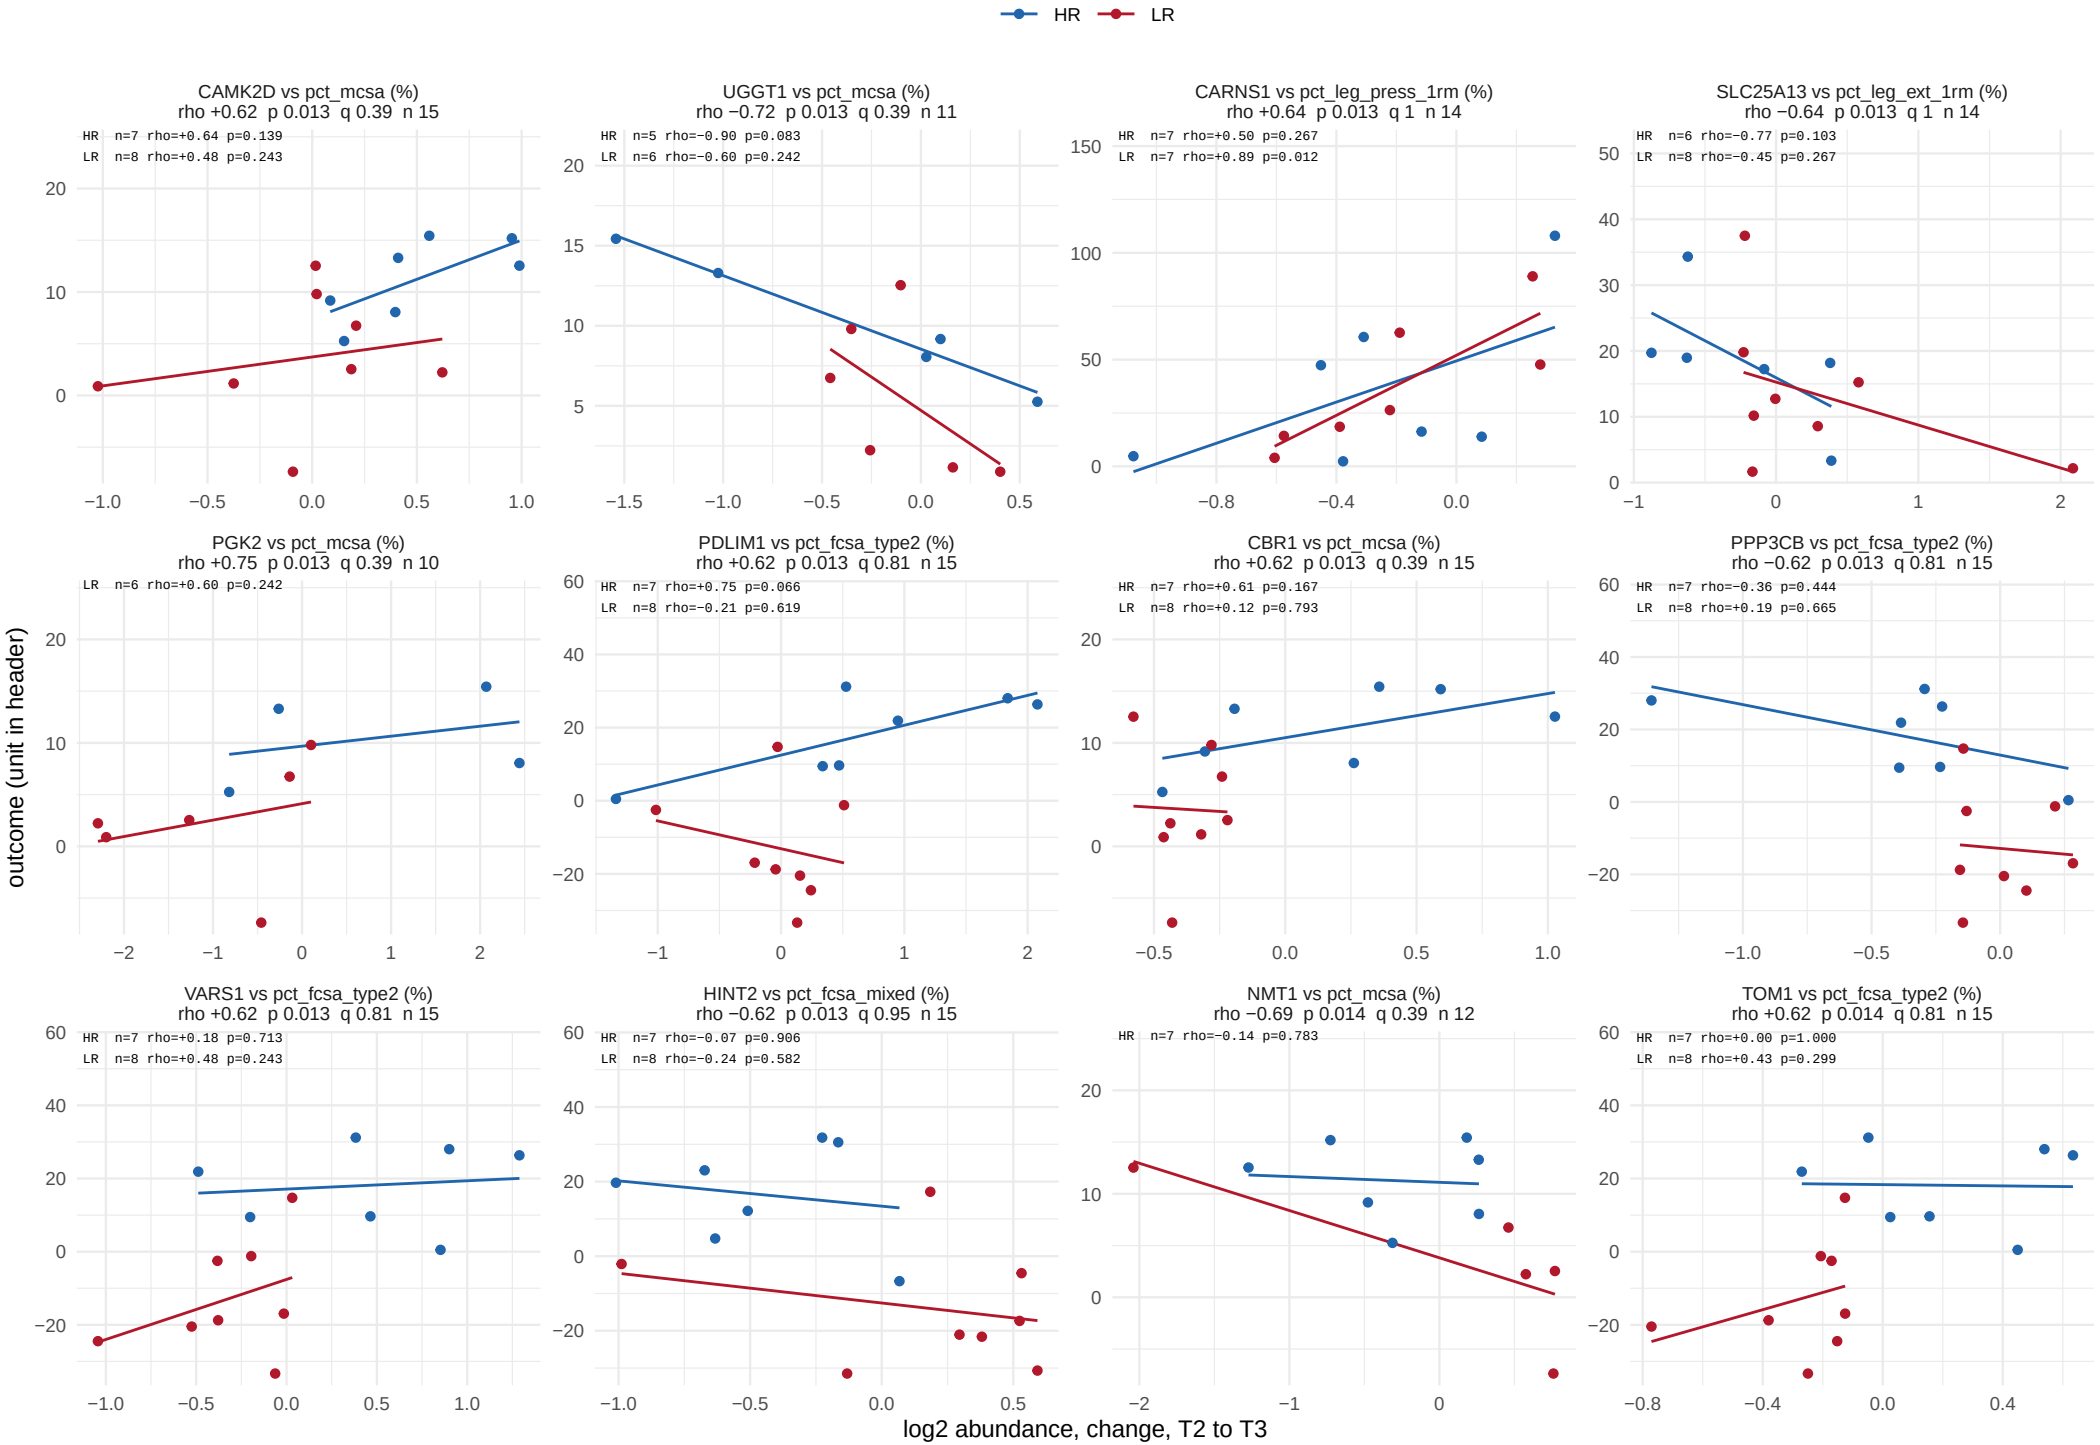

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


610 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 16 of 51.

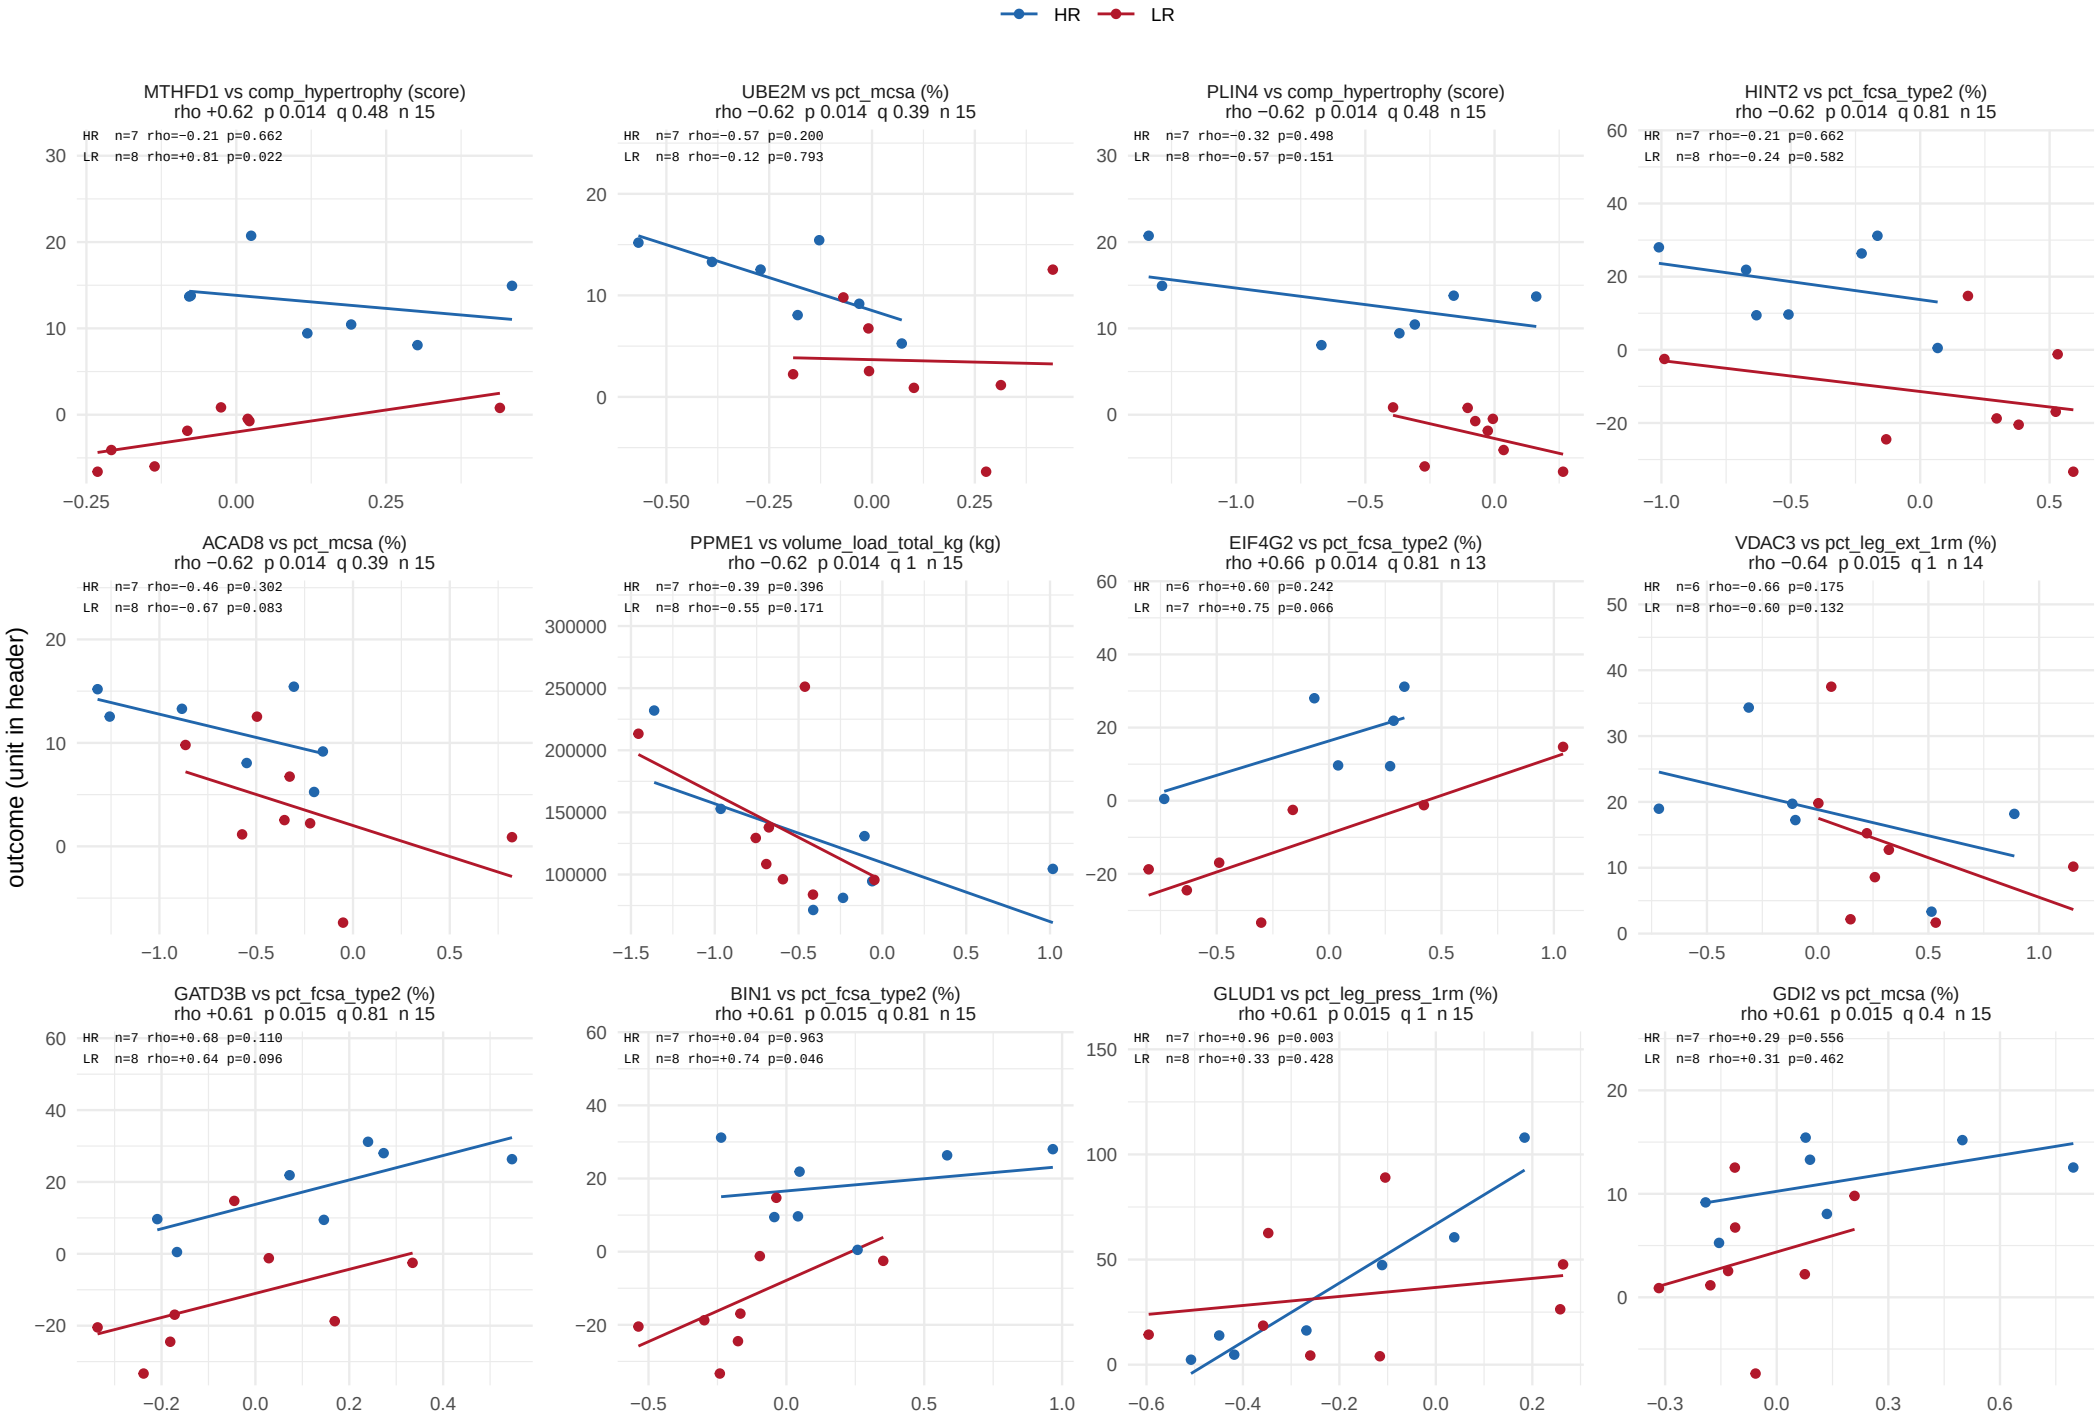

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


610 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 17 of 51.

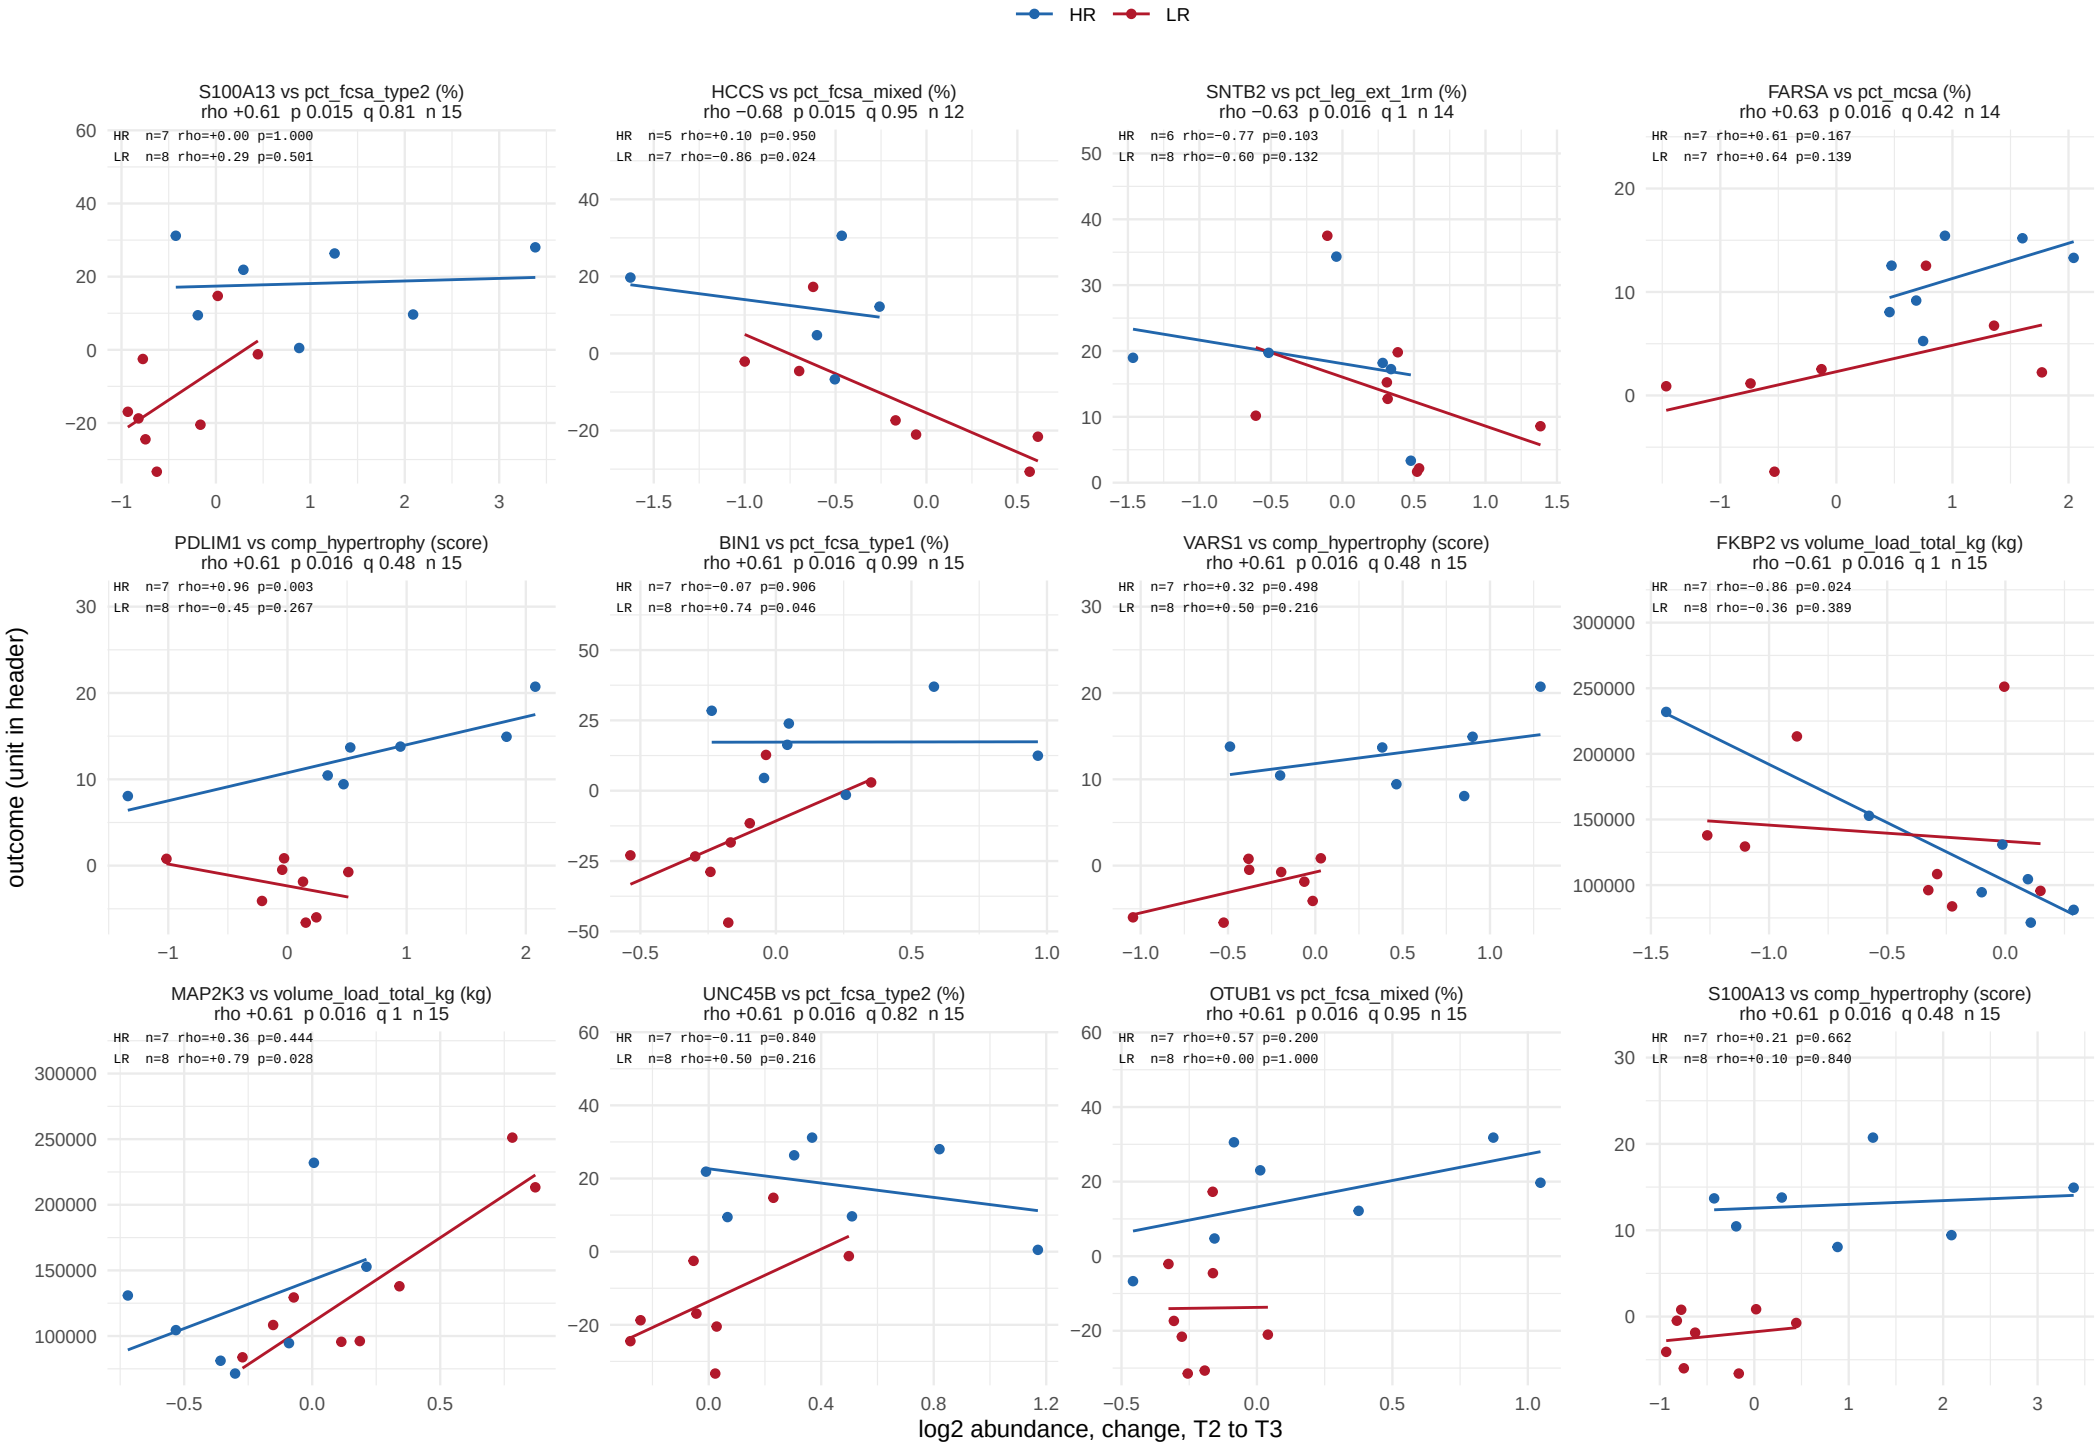

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


610 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 18 of 51.

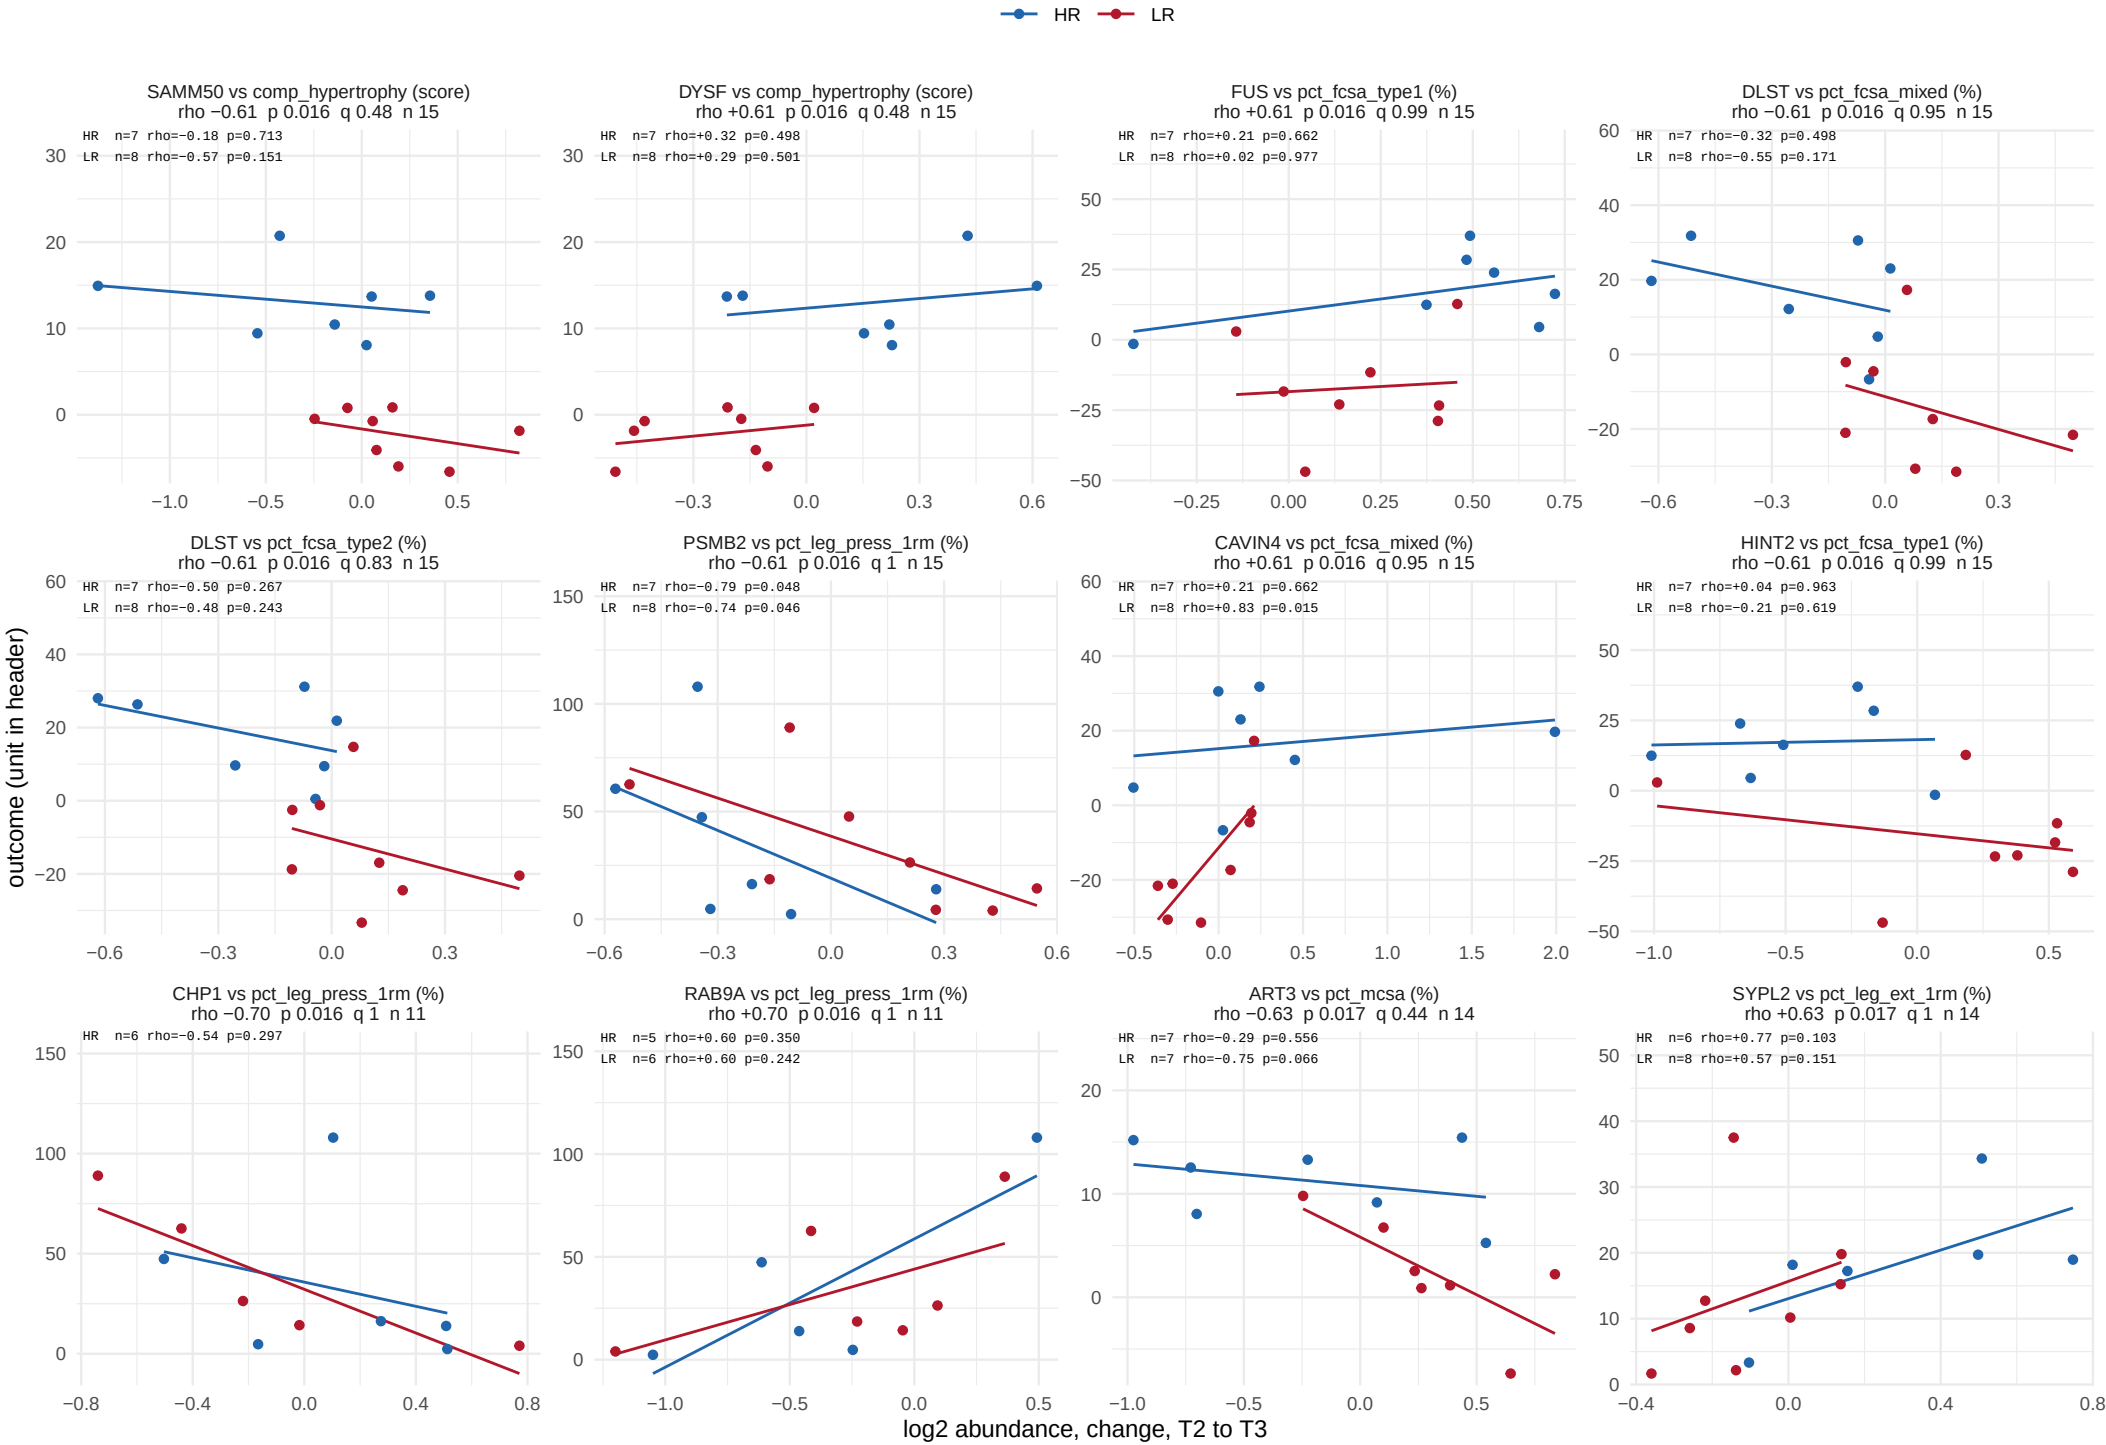

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


610 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 19 of 51.

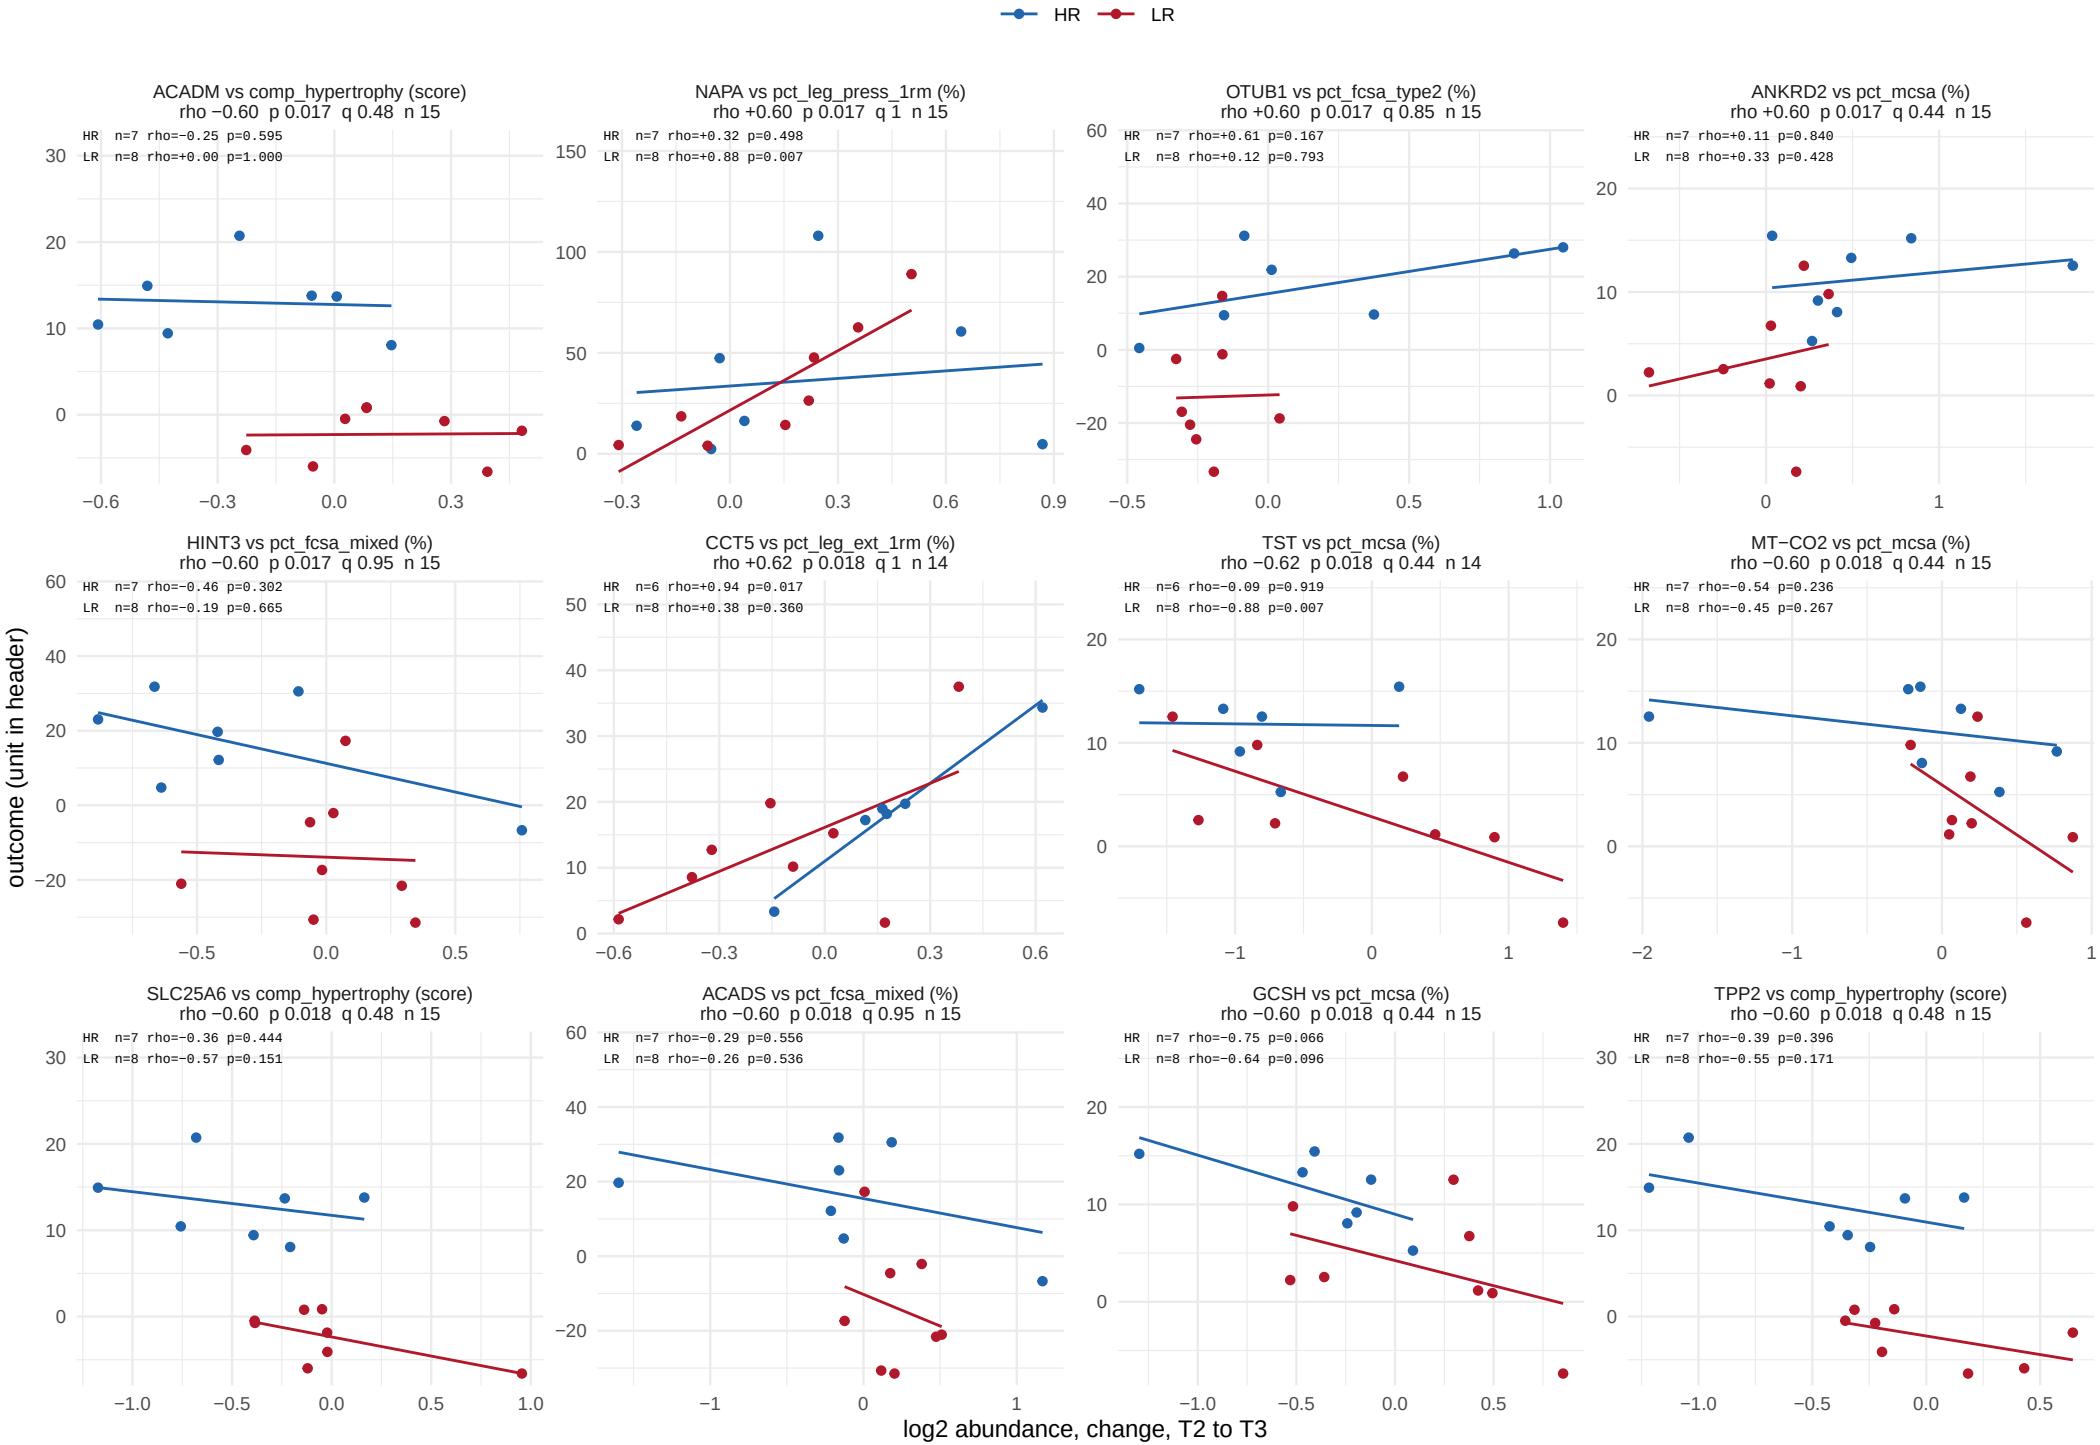

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


610 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 20 of 51.

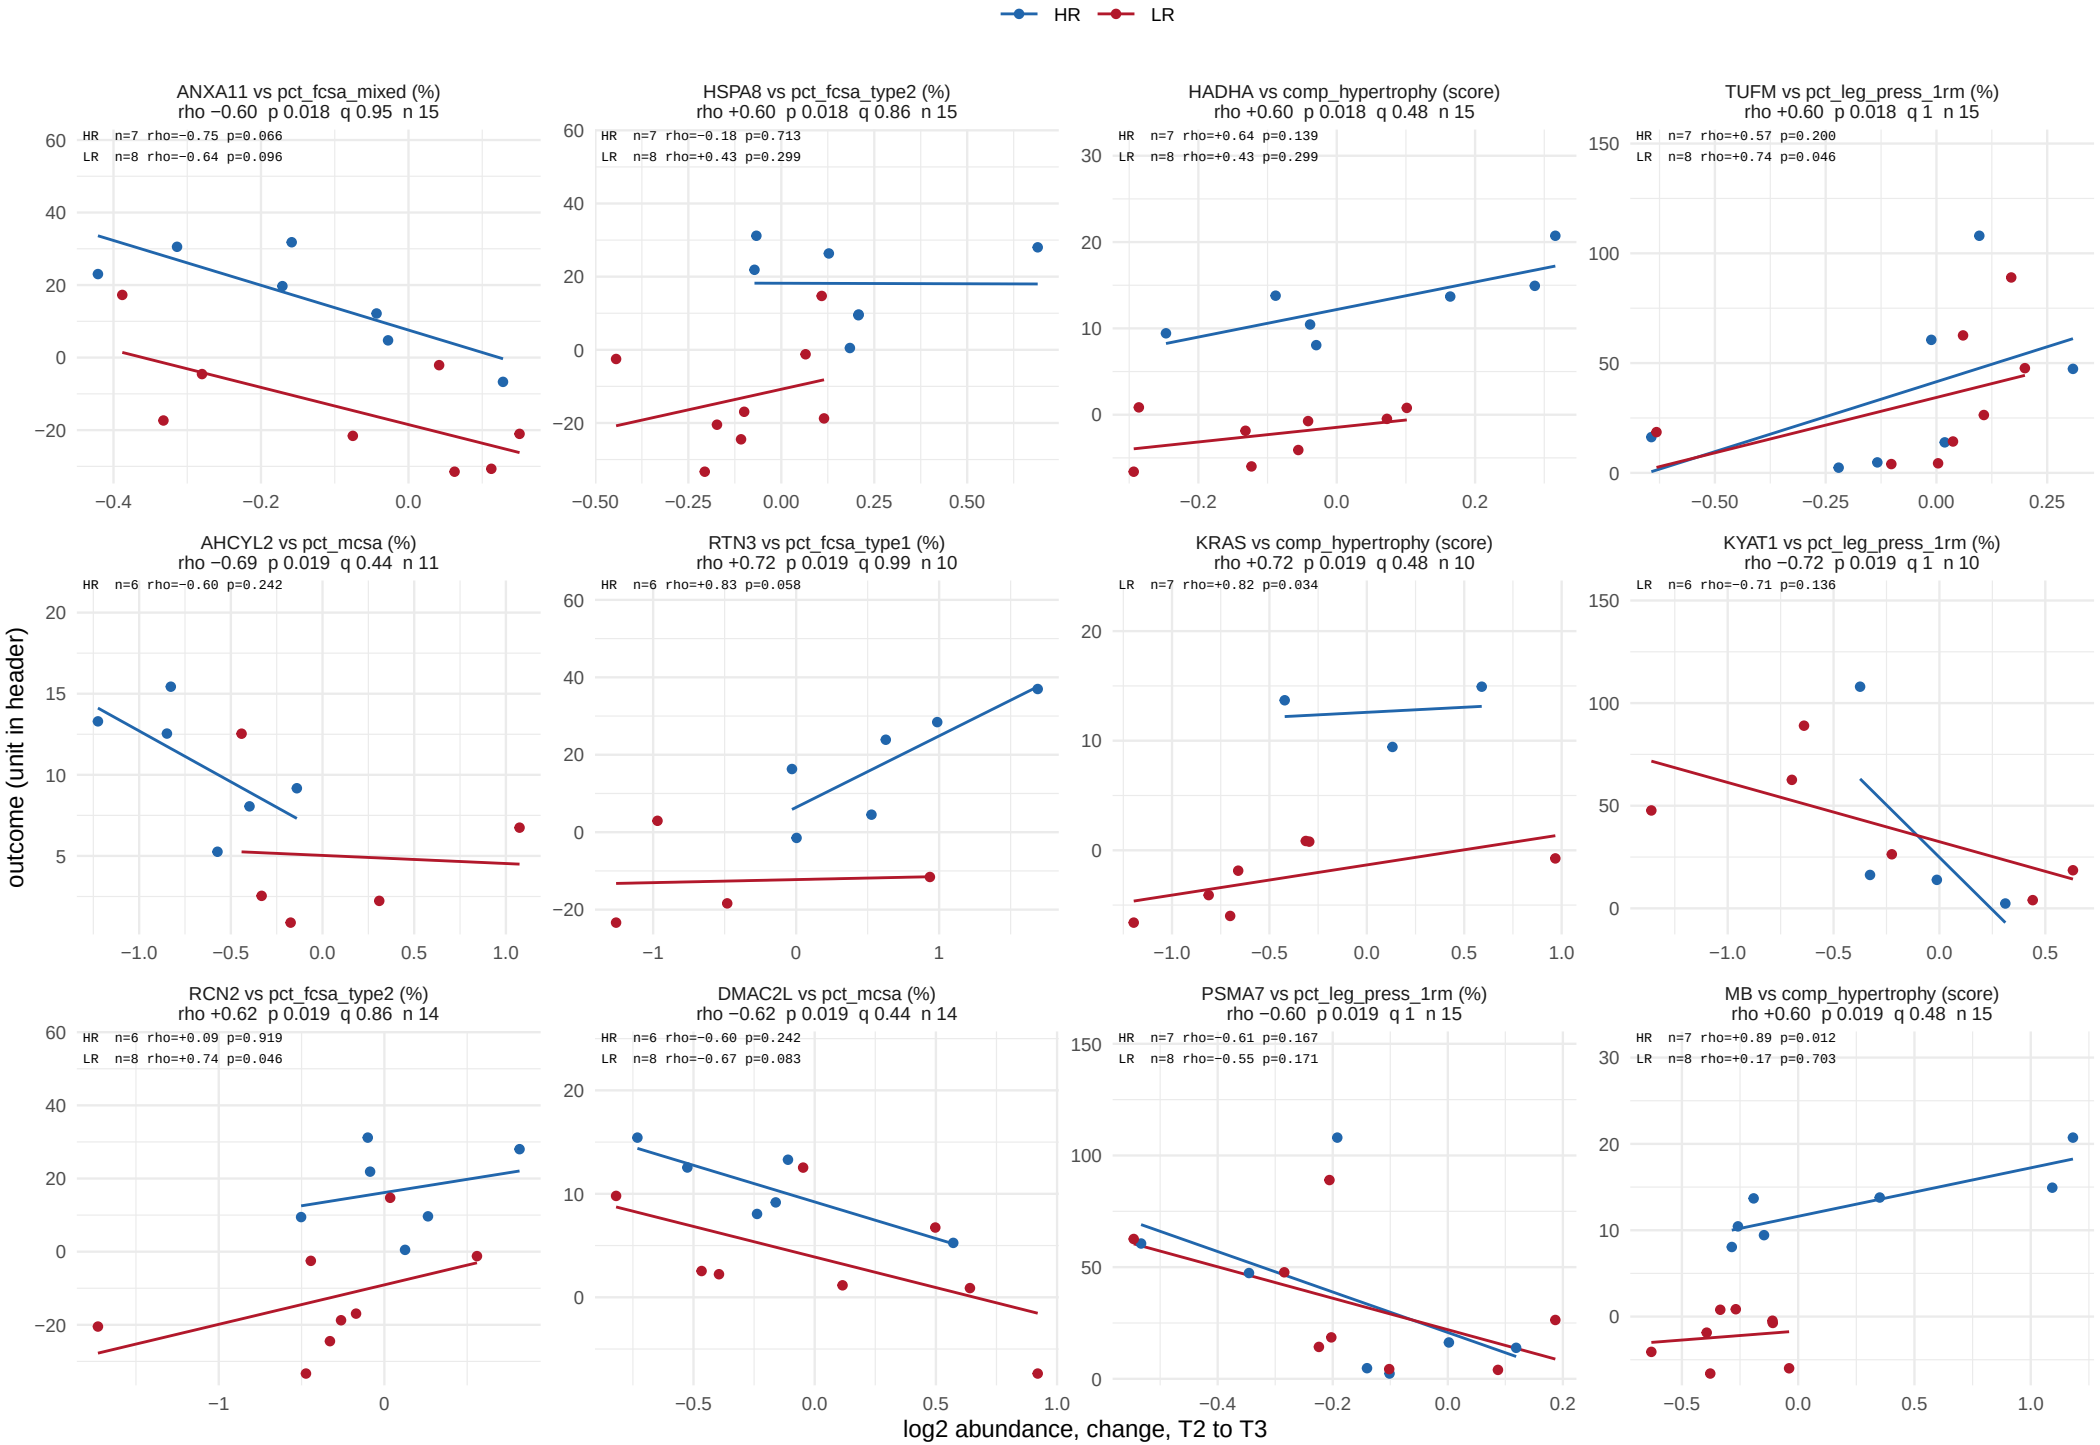

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


610 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 21 of 51.

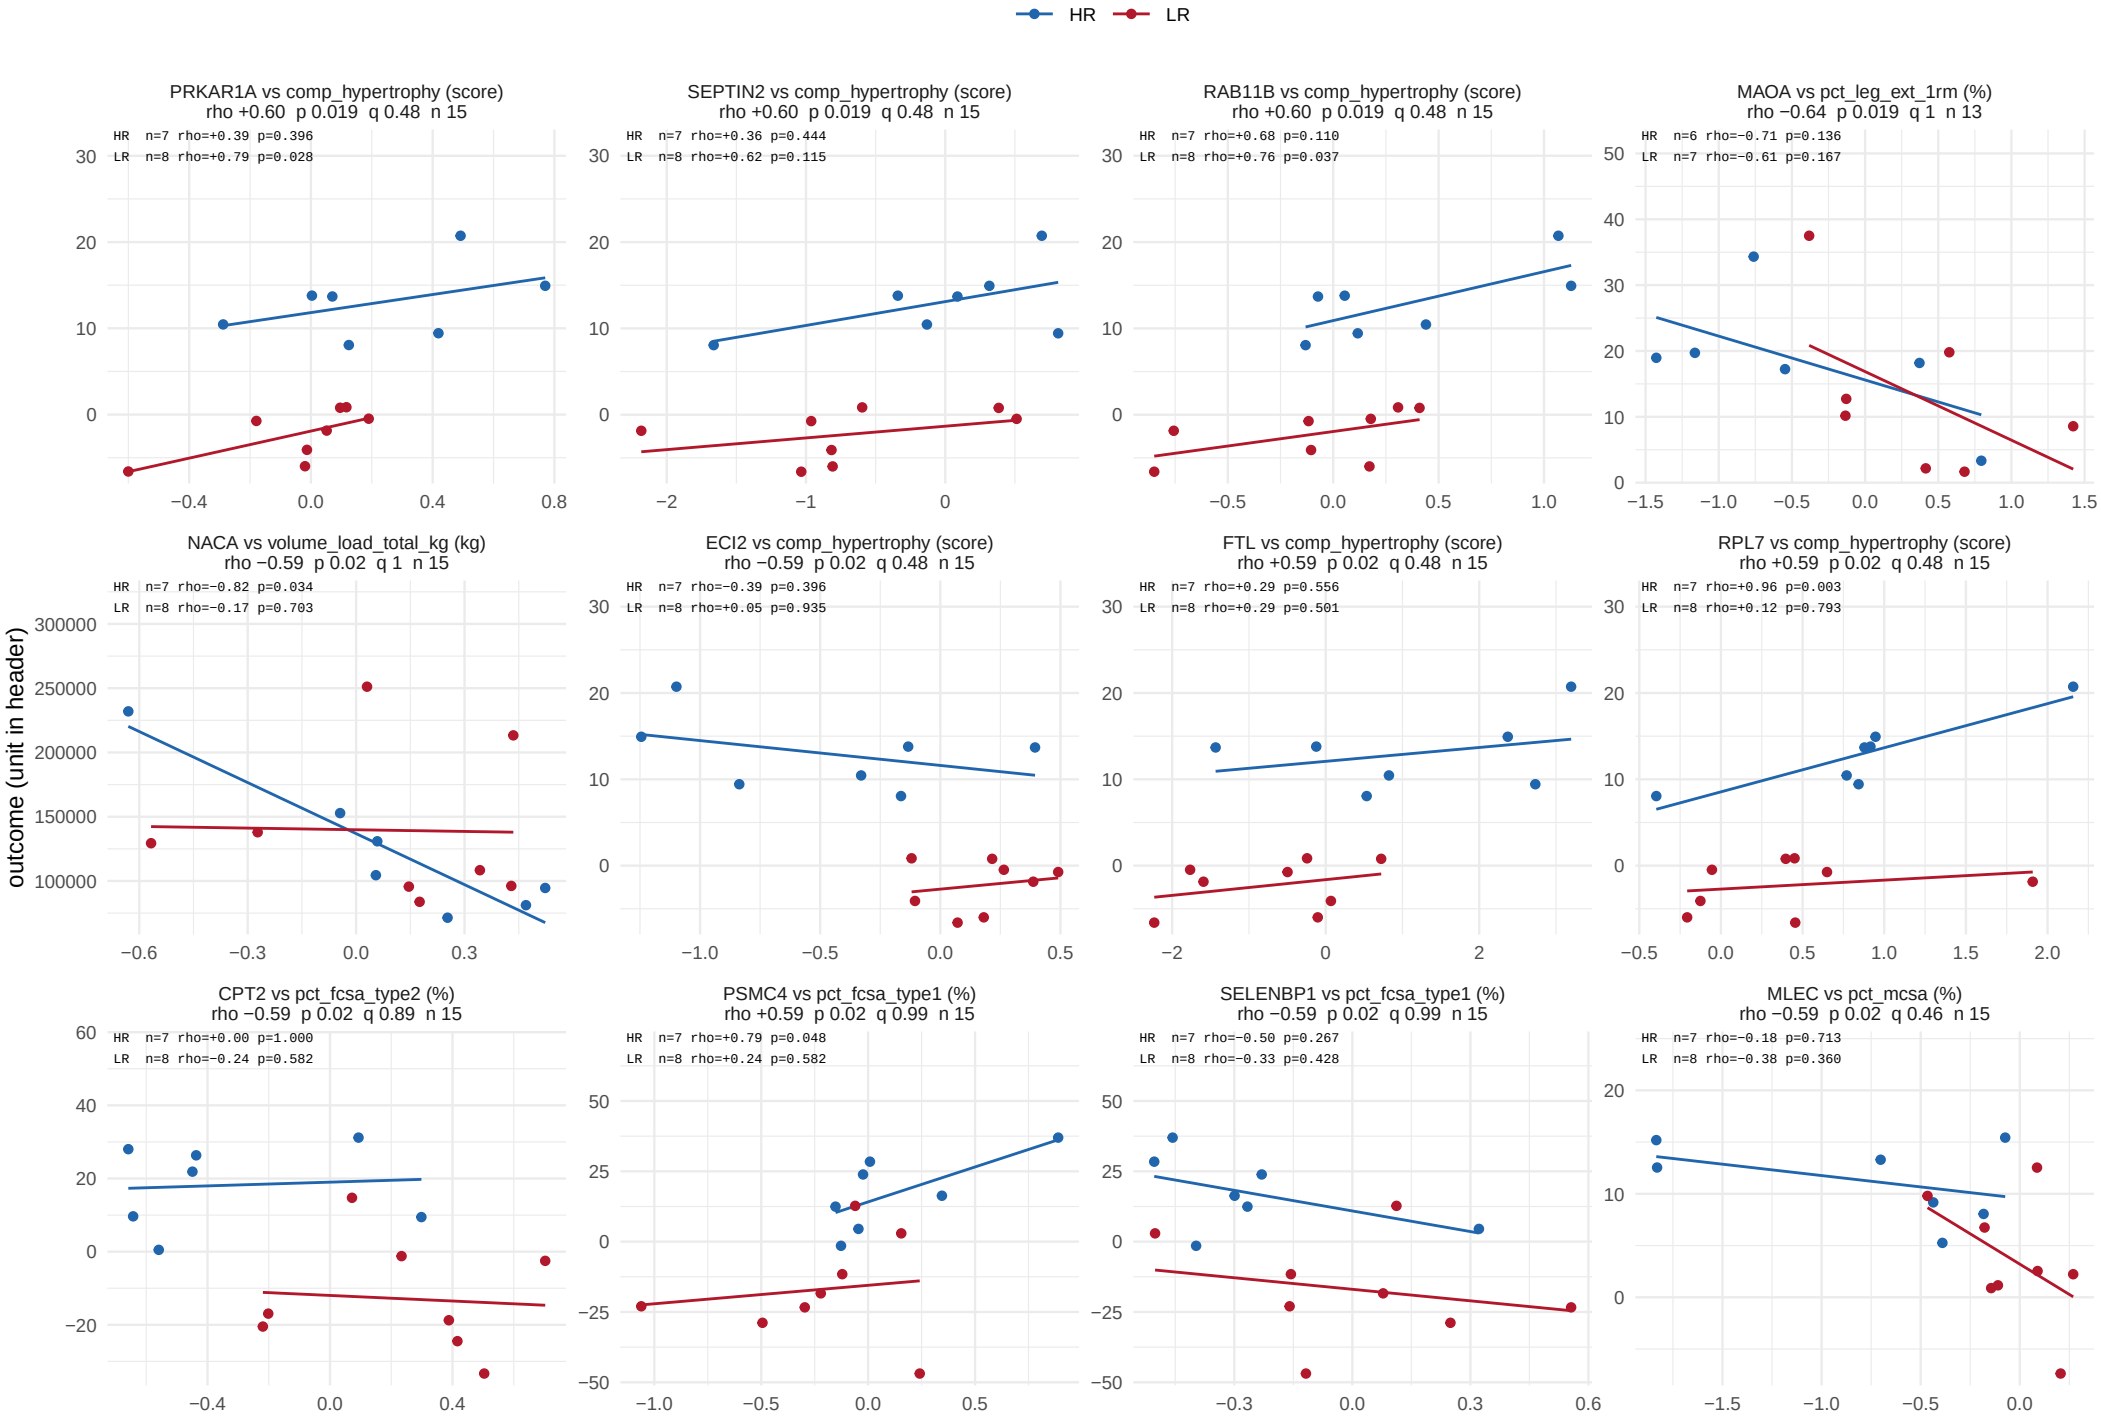

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


610 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 22 of 51.

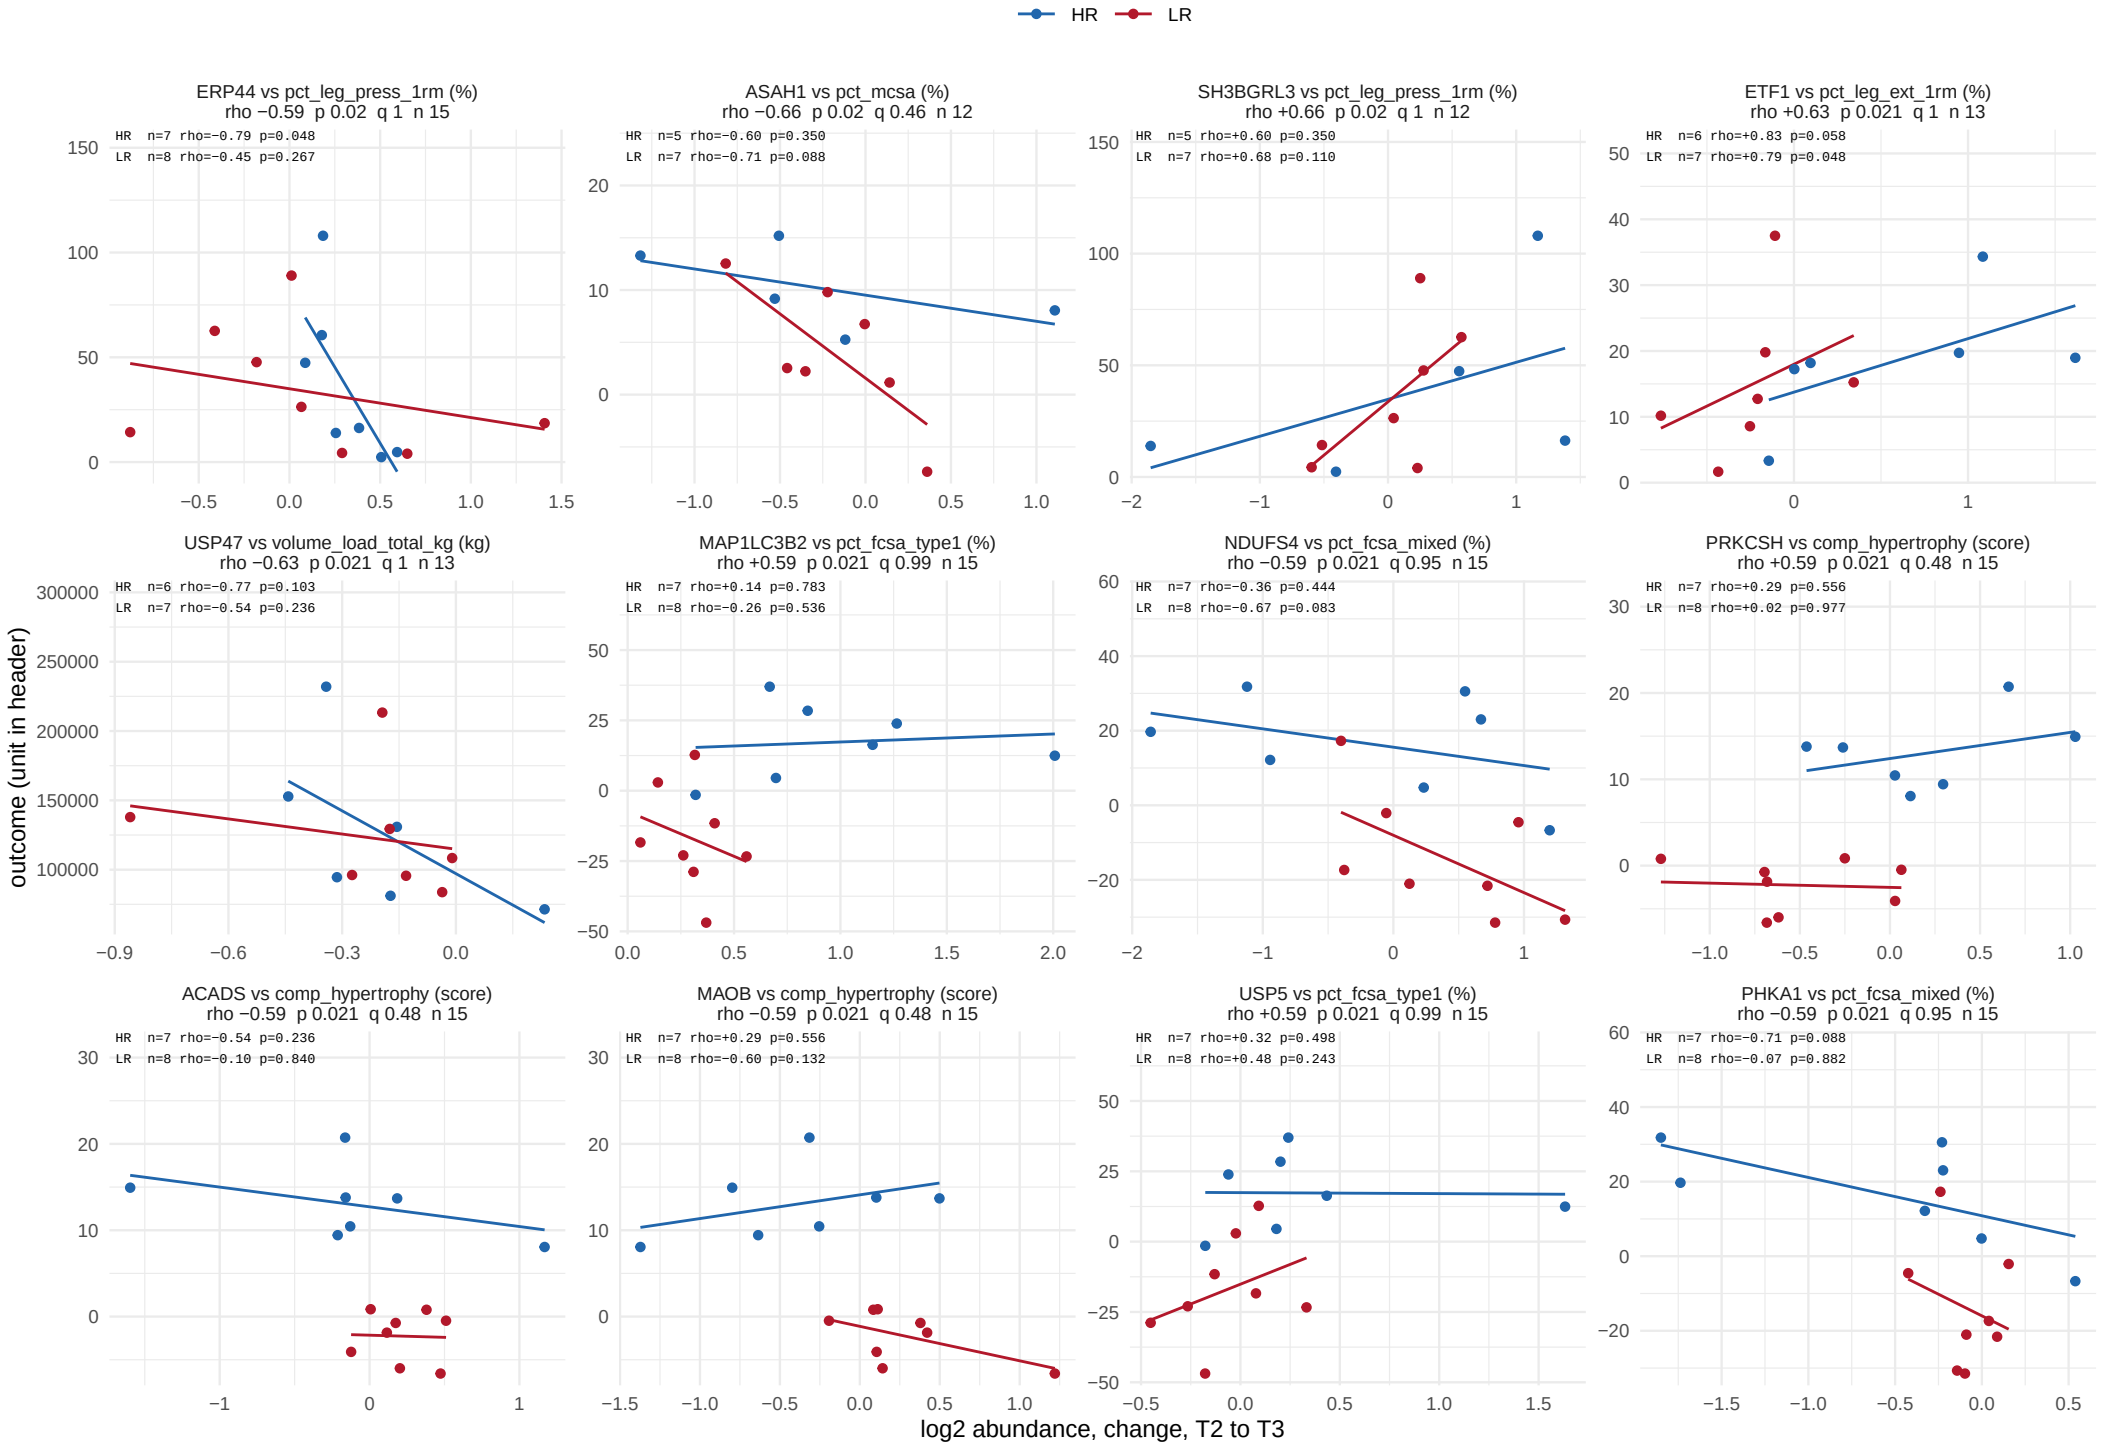

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


610 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 23 of 51.

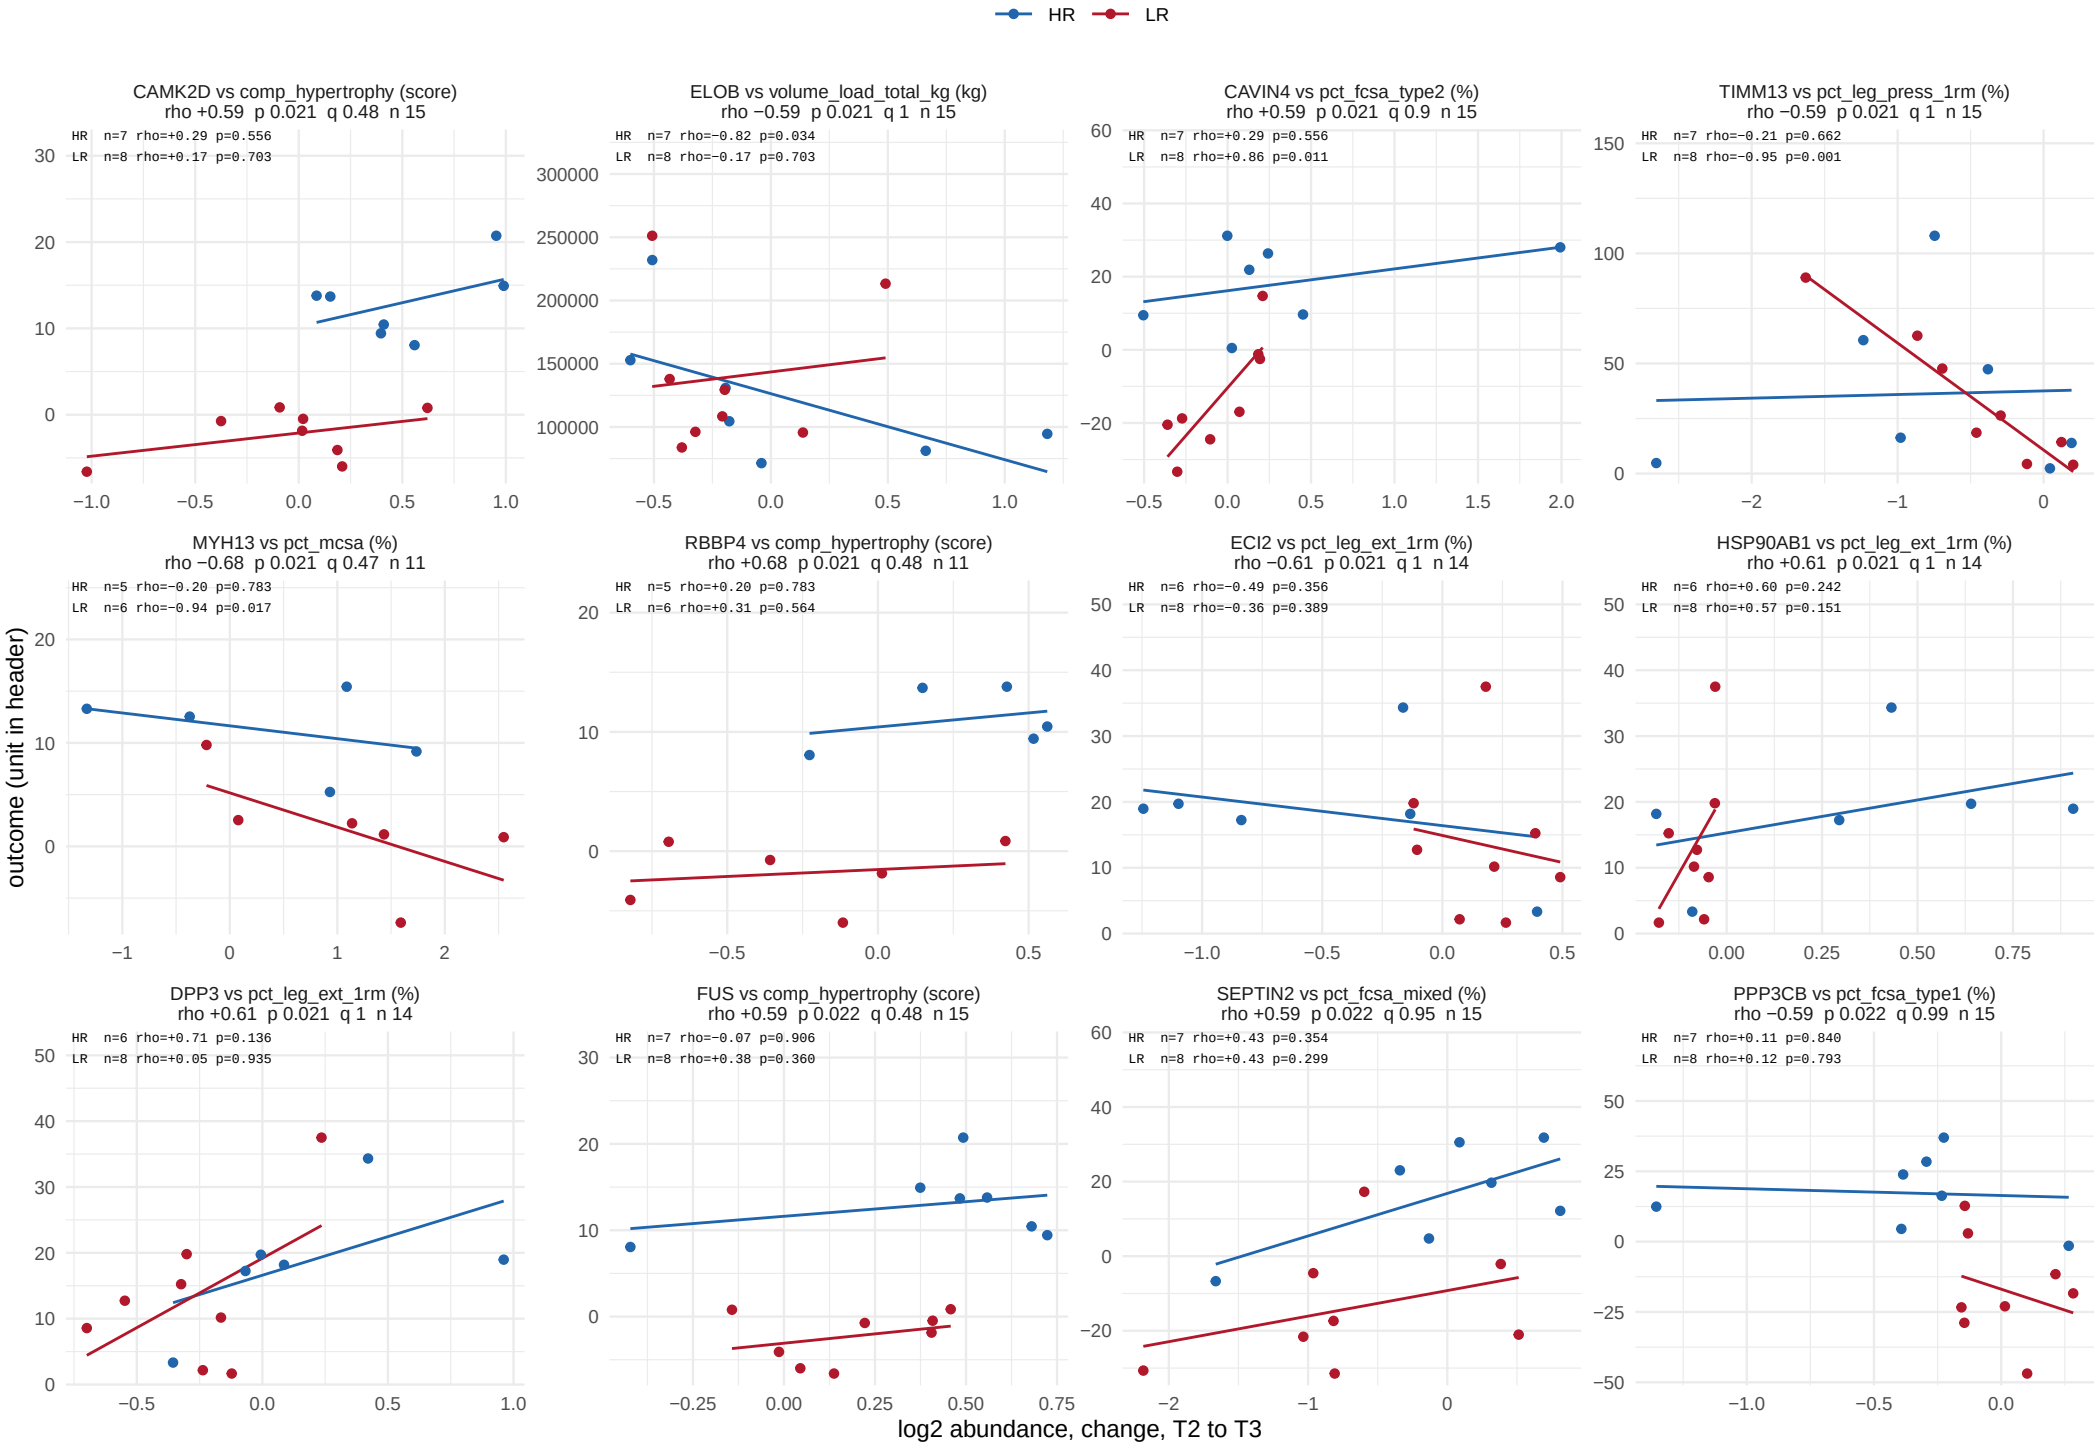

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


610 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 24 of 51.

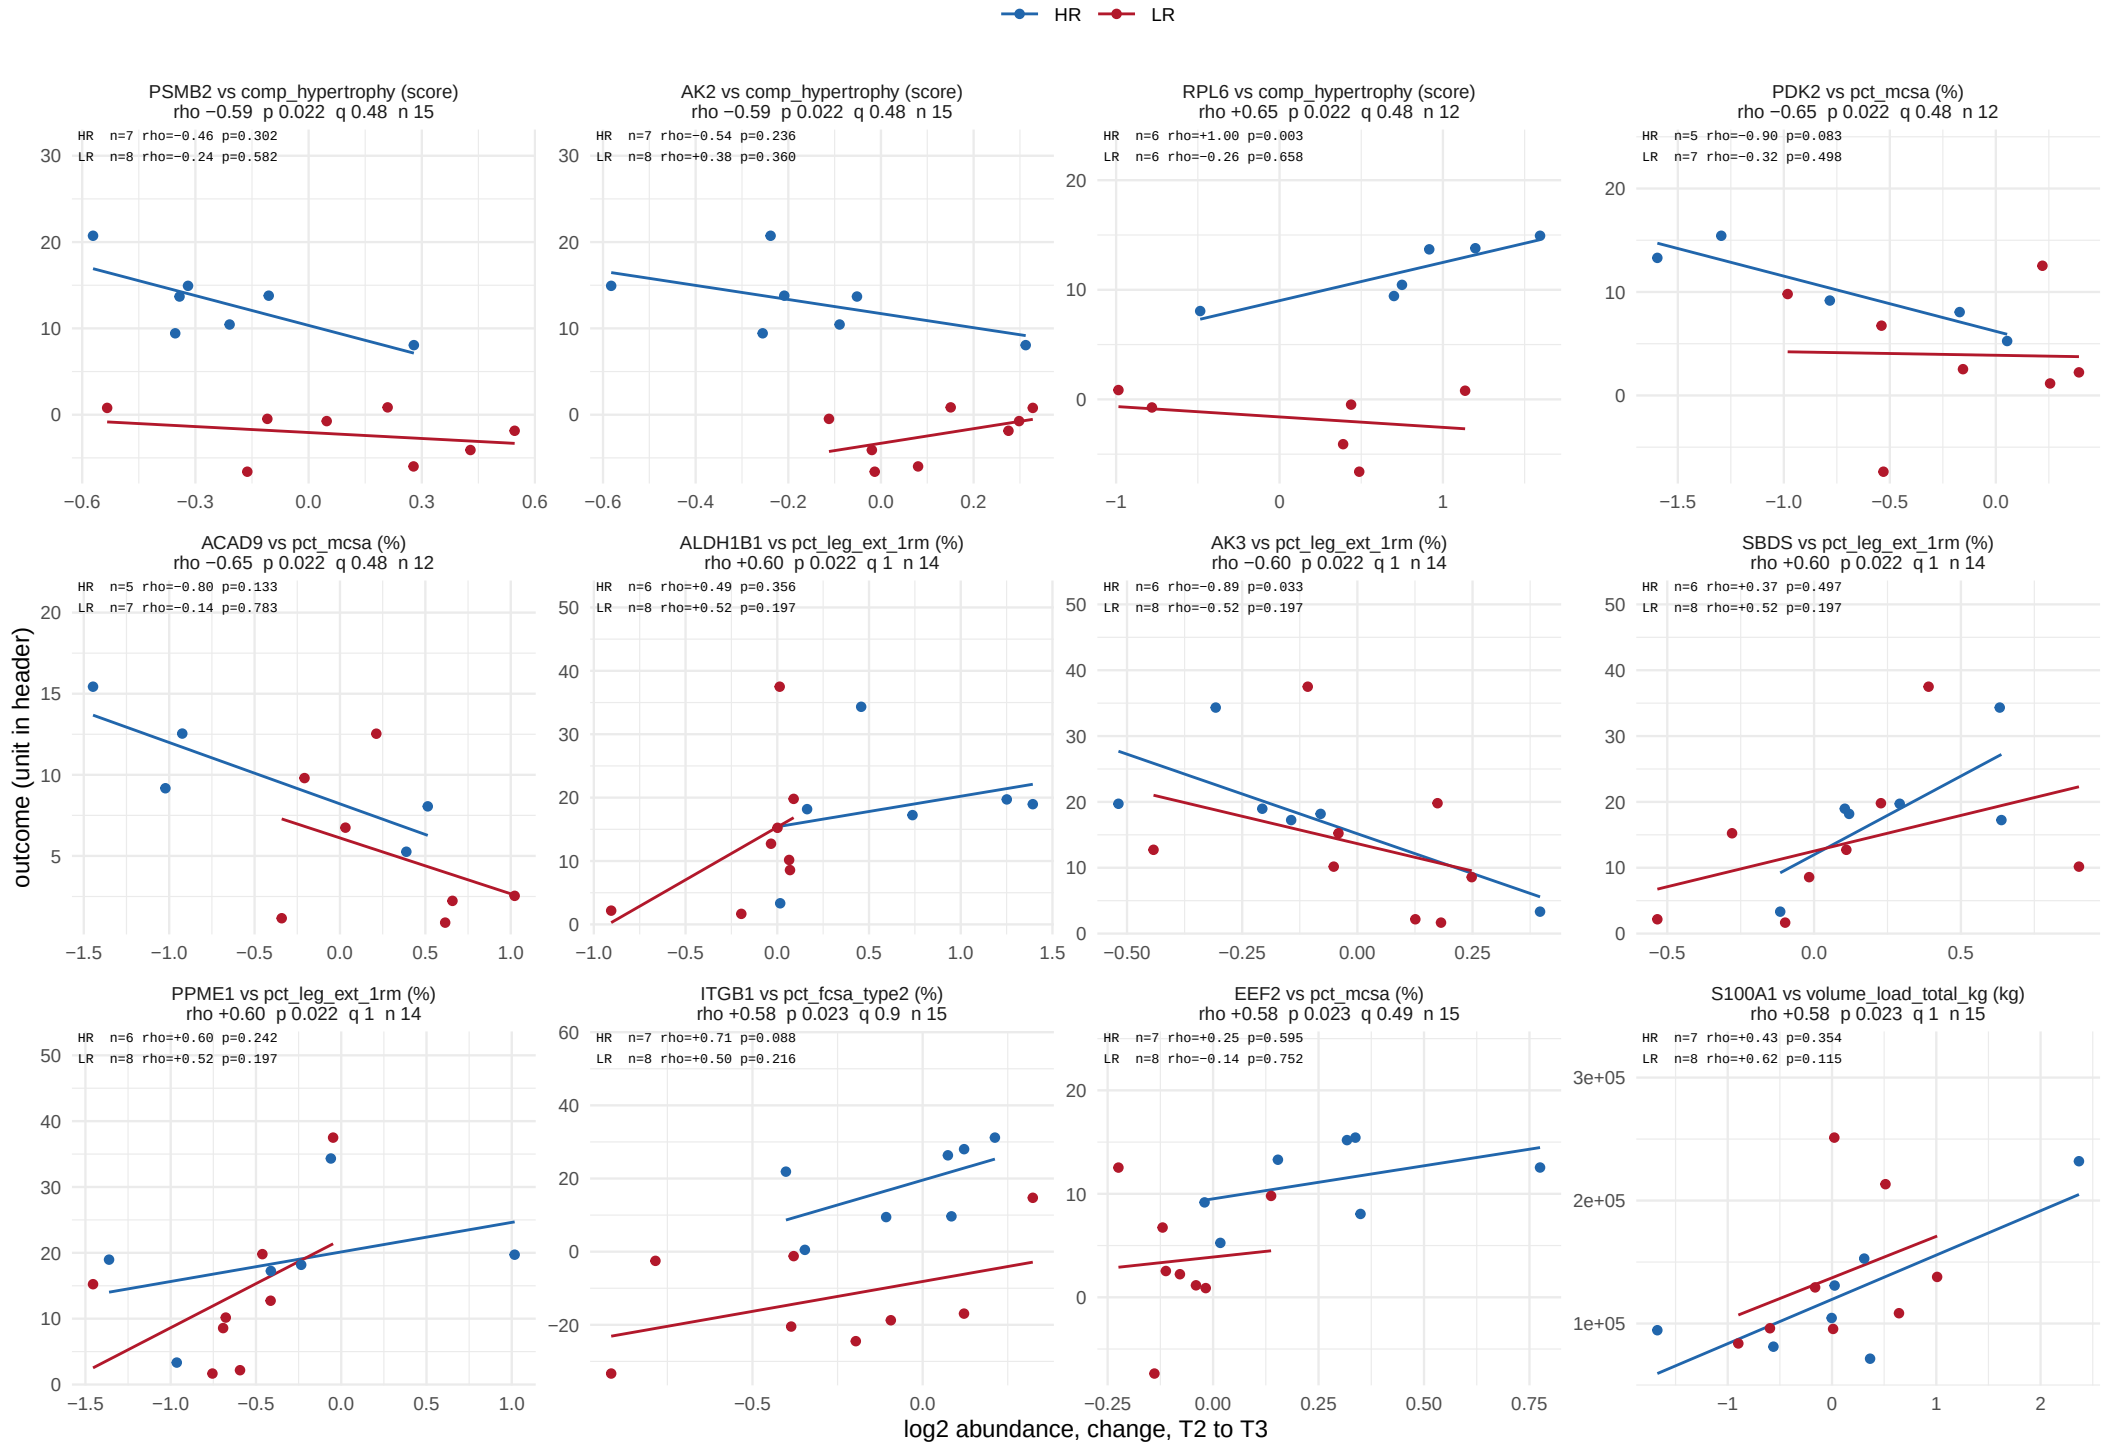

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


610 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 25 of 51.

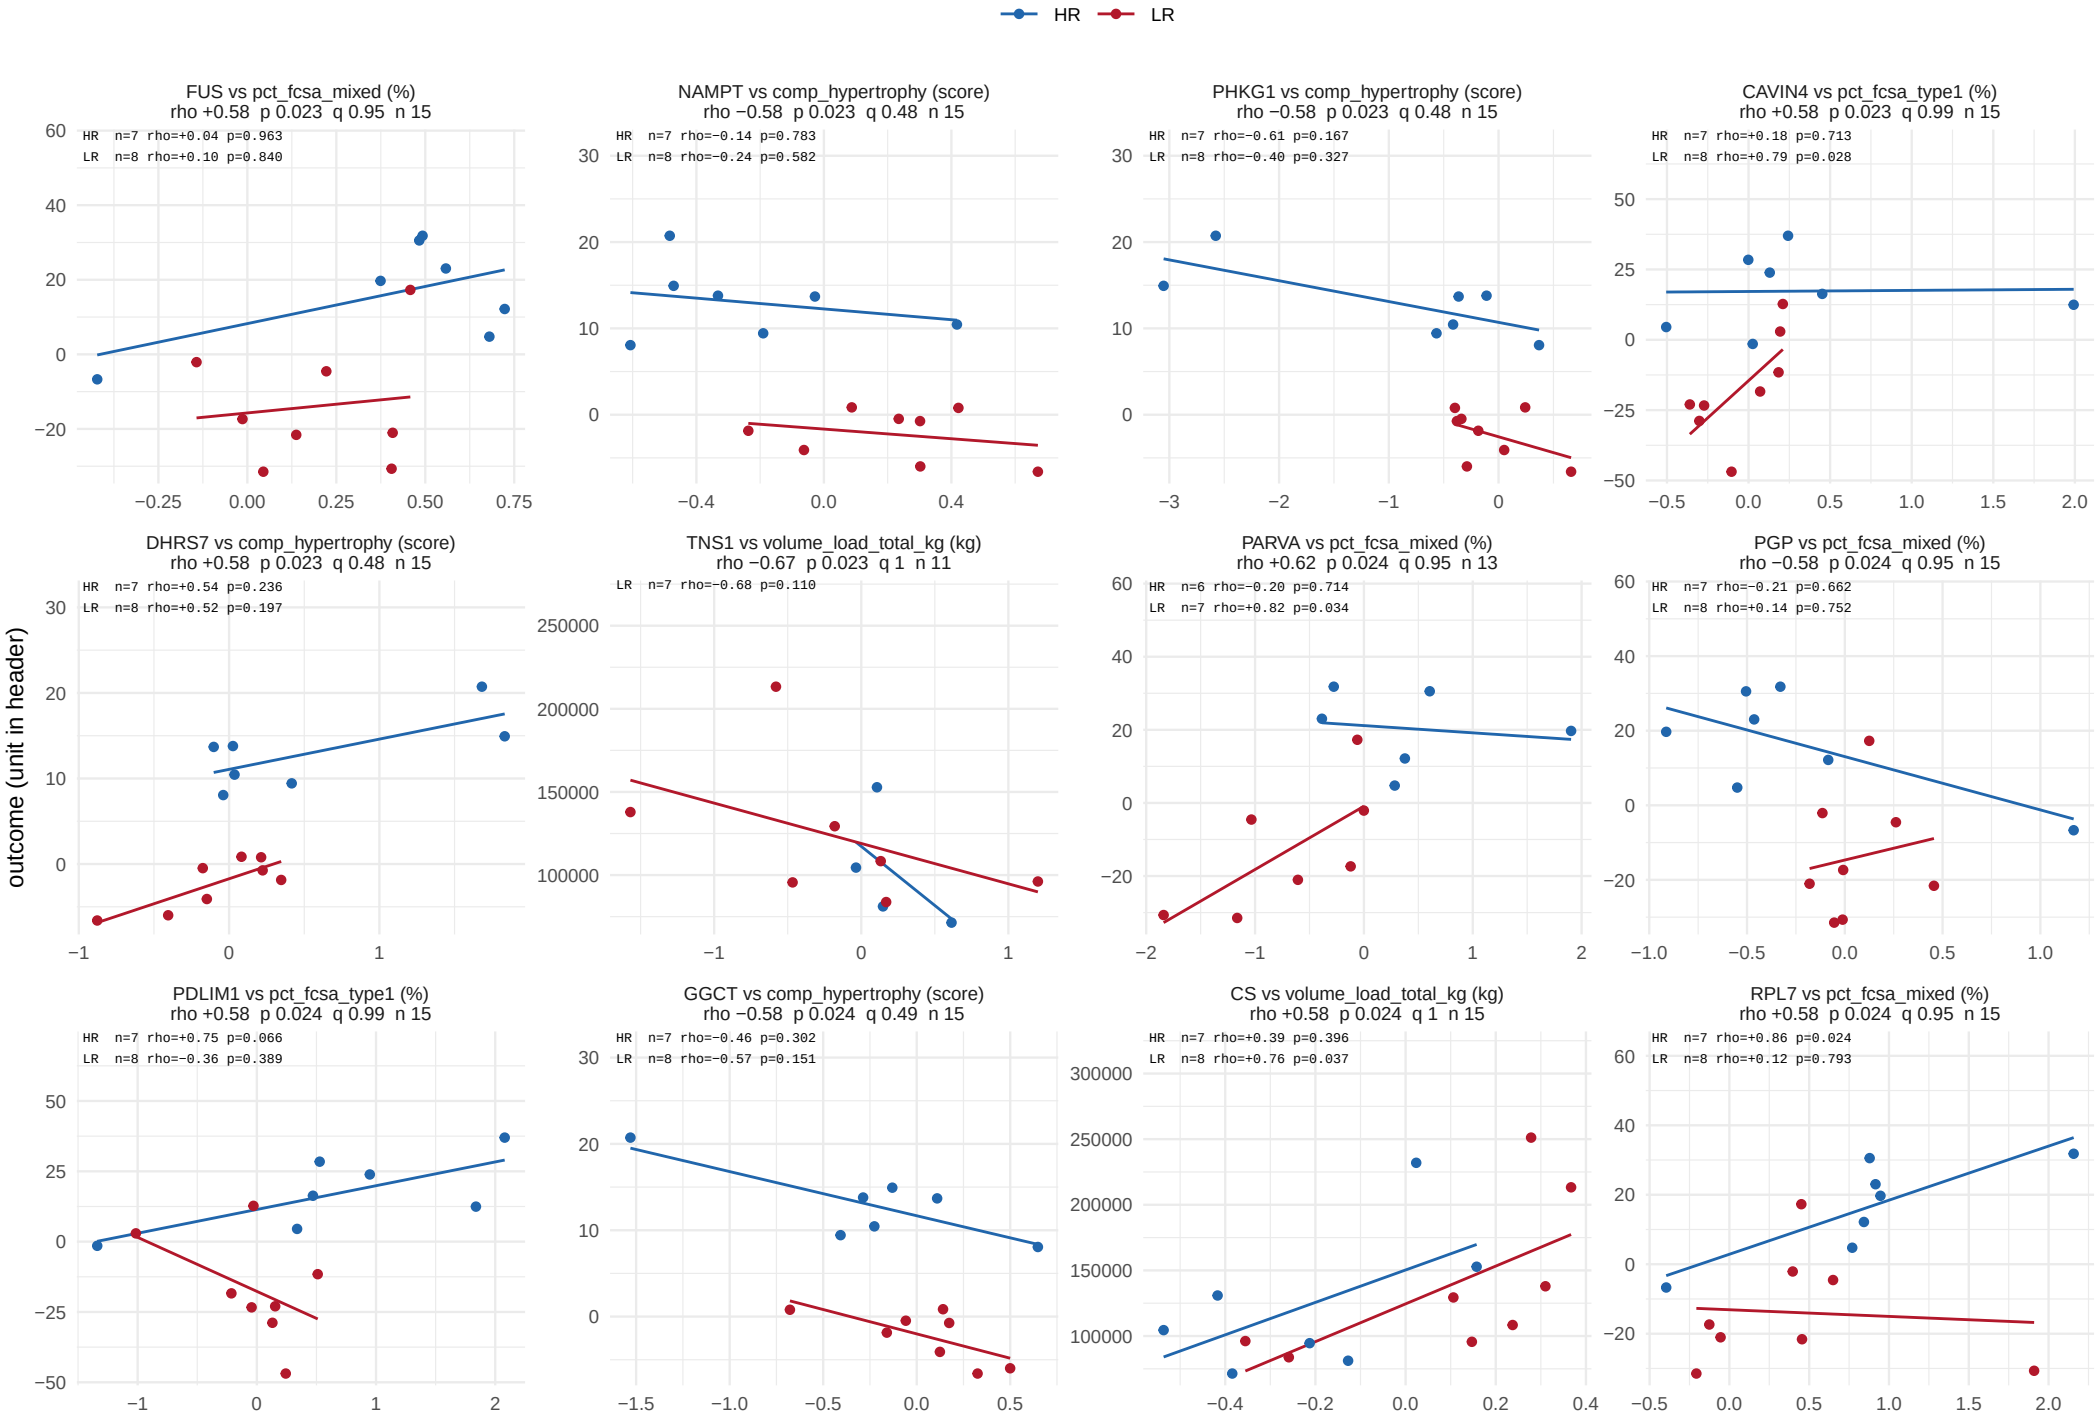

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


610 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 26 of 51.

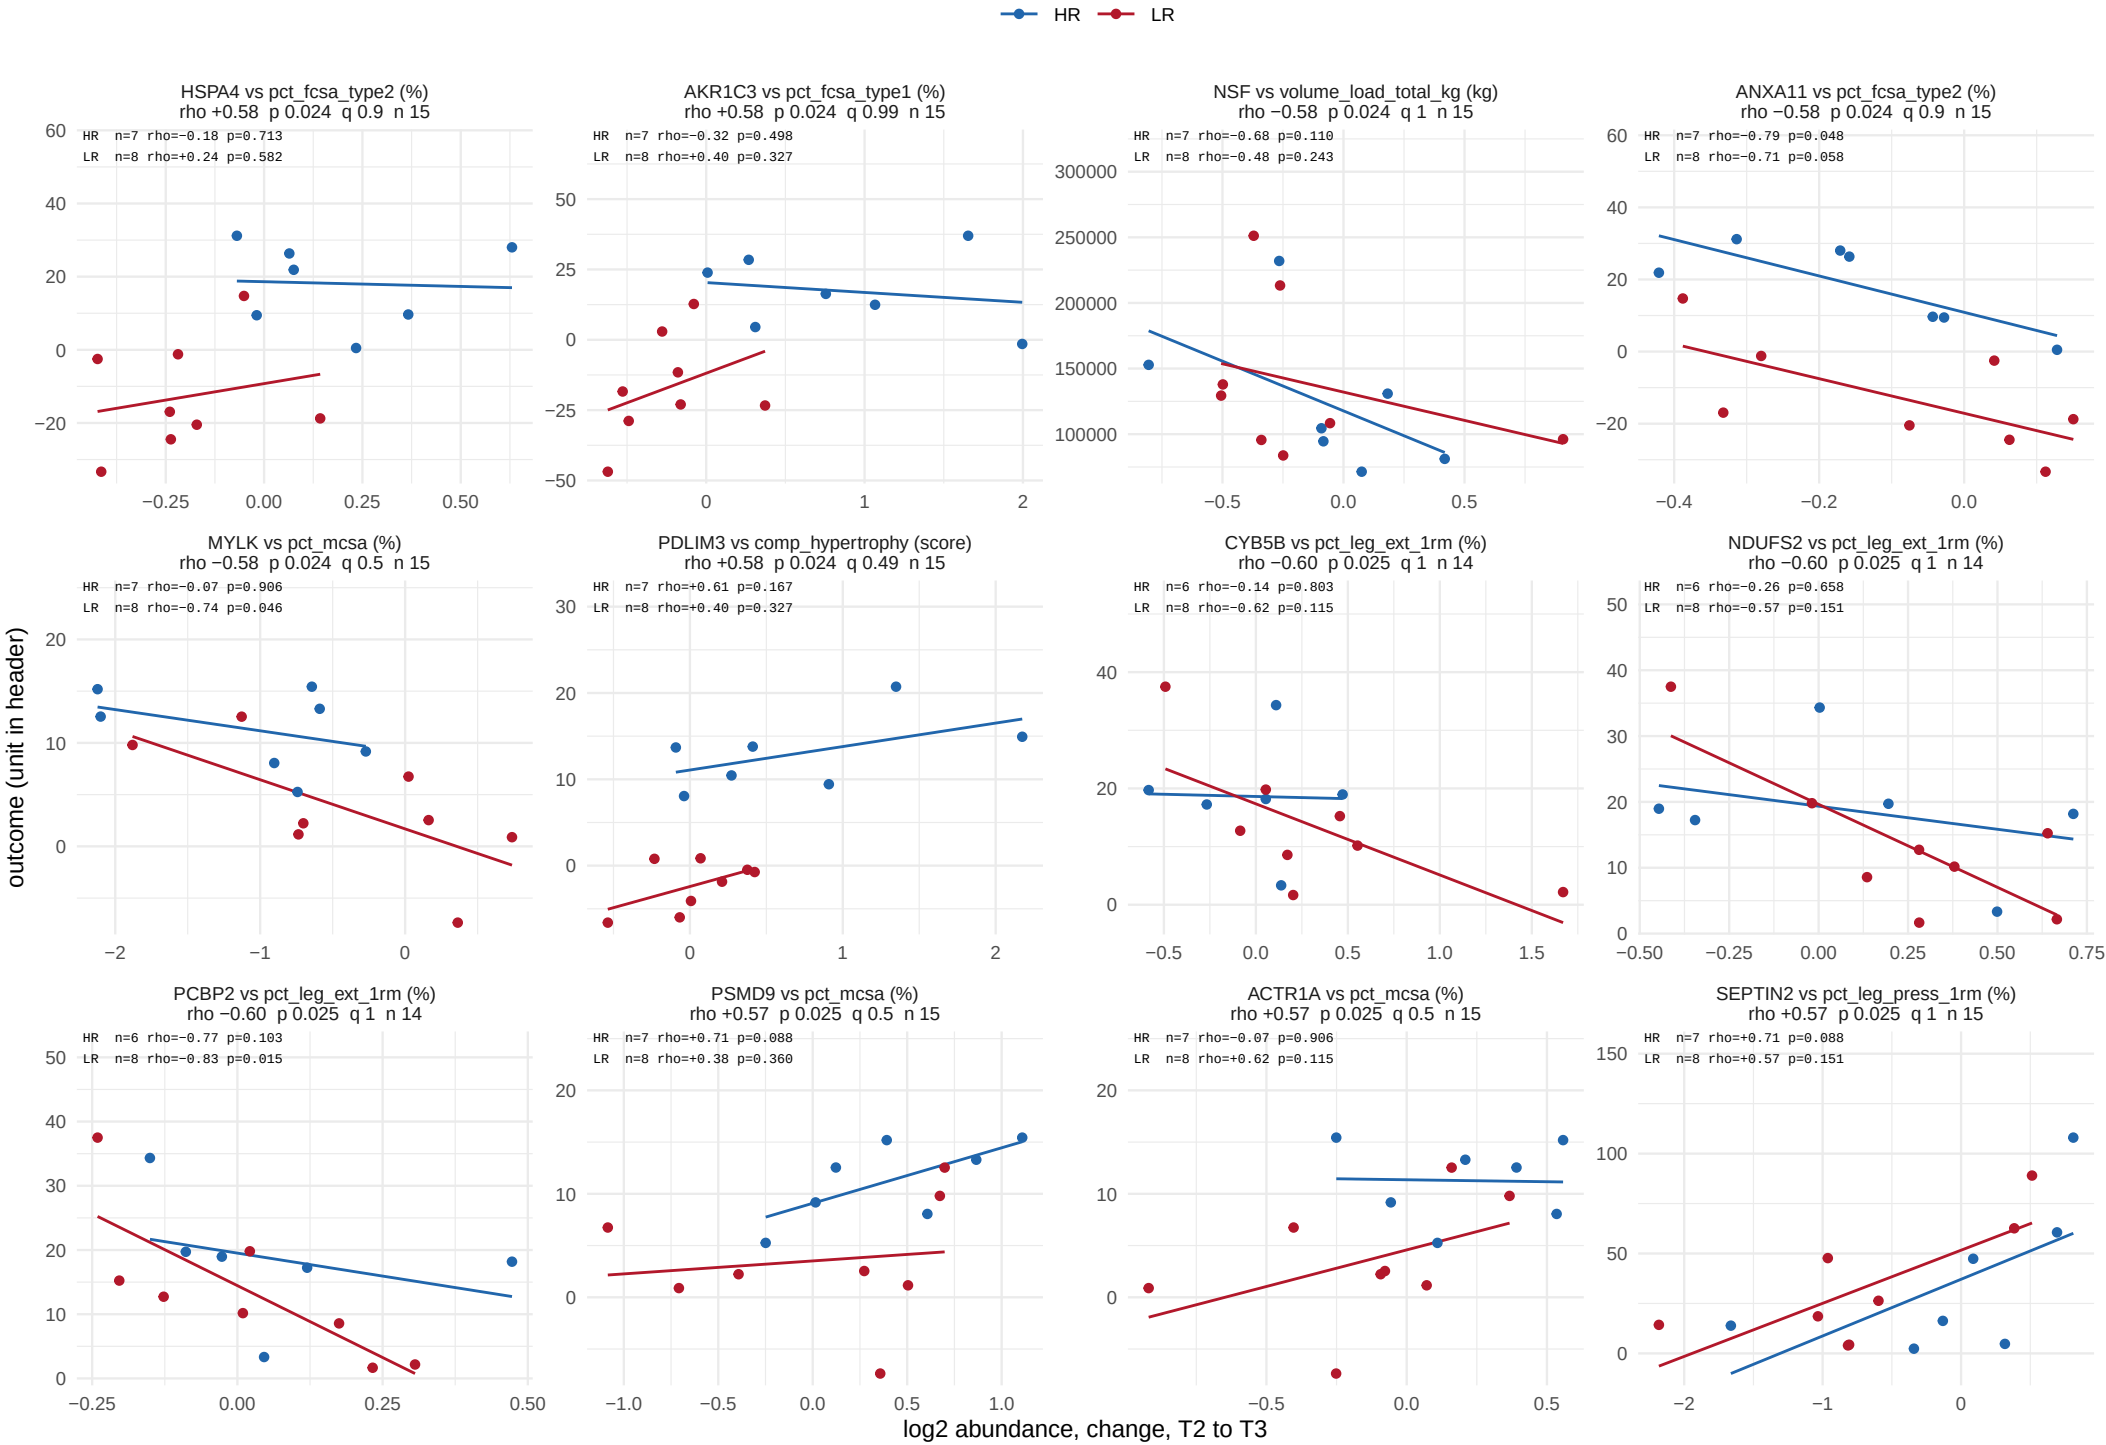

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


610 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 27 of 51.

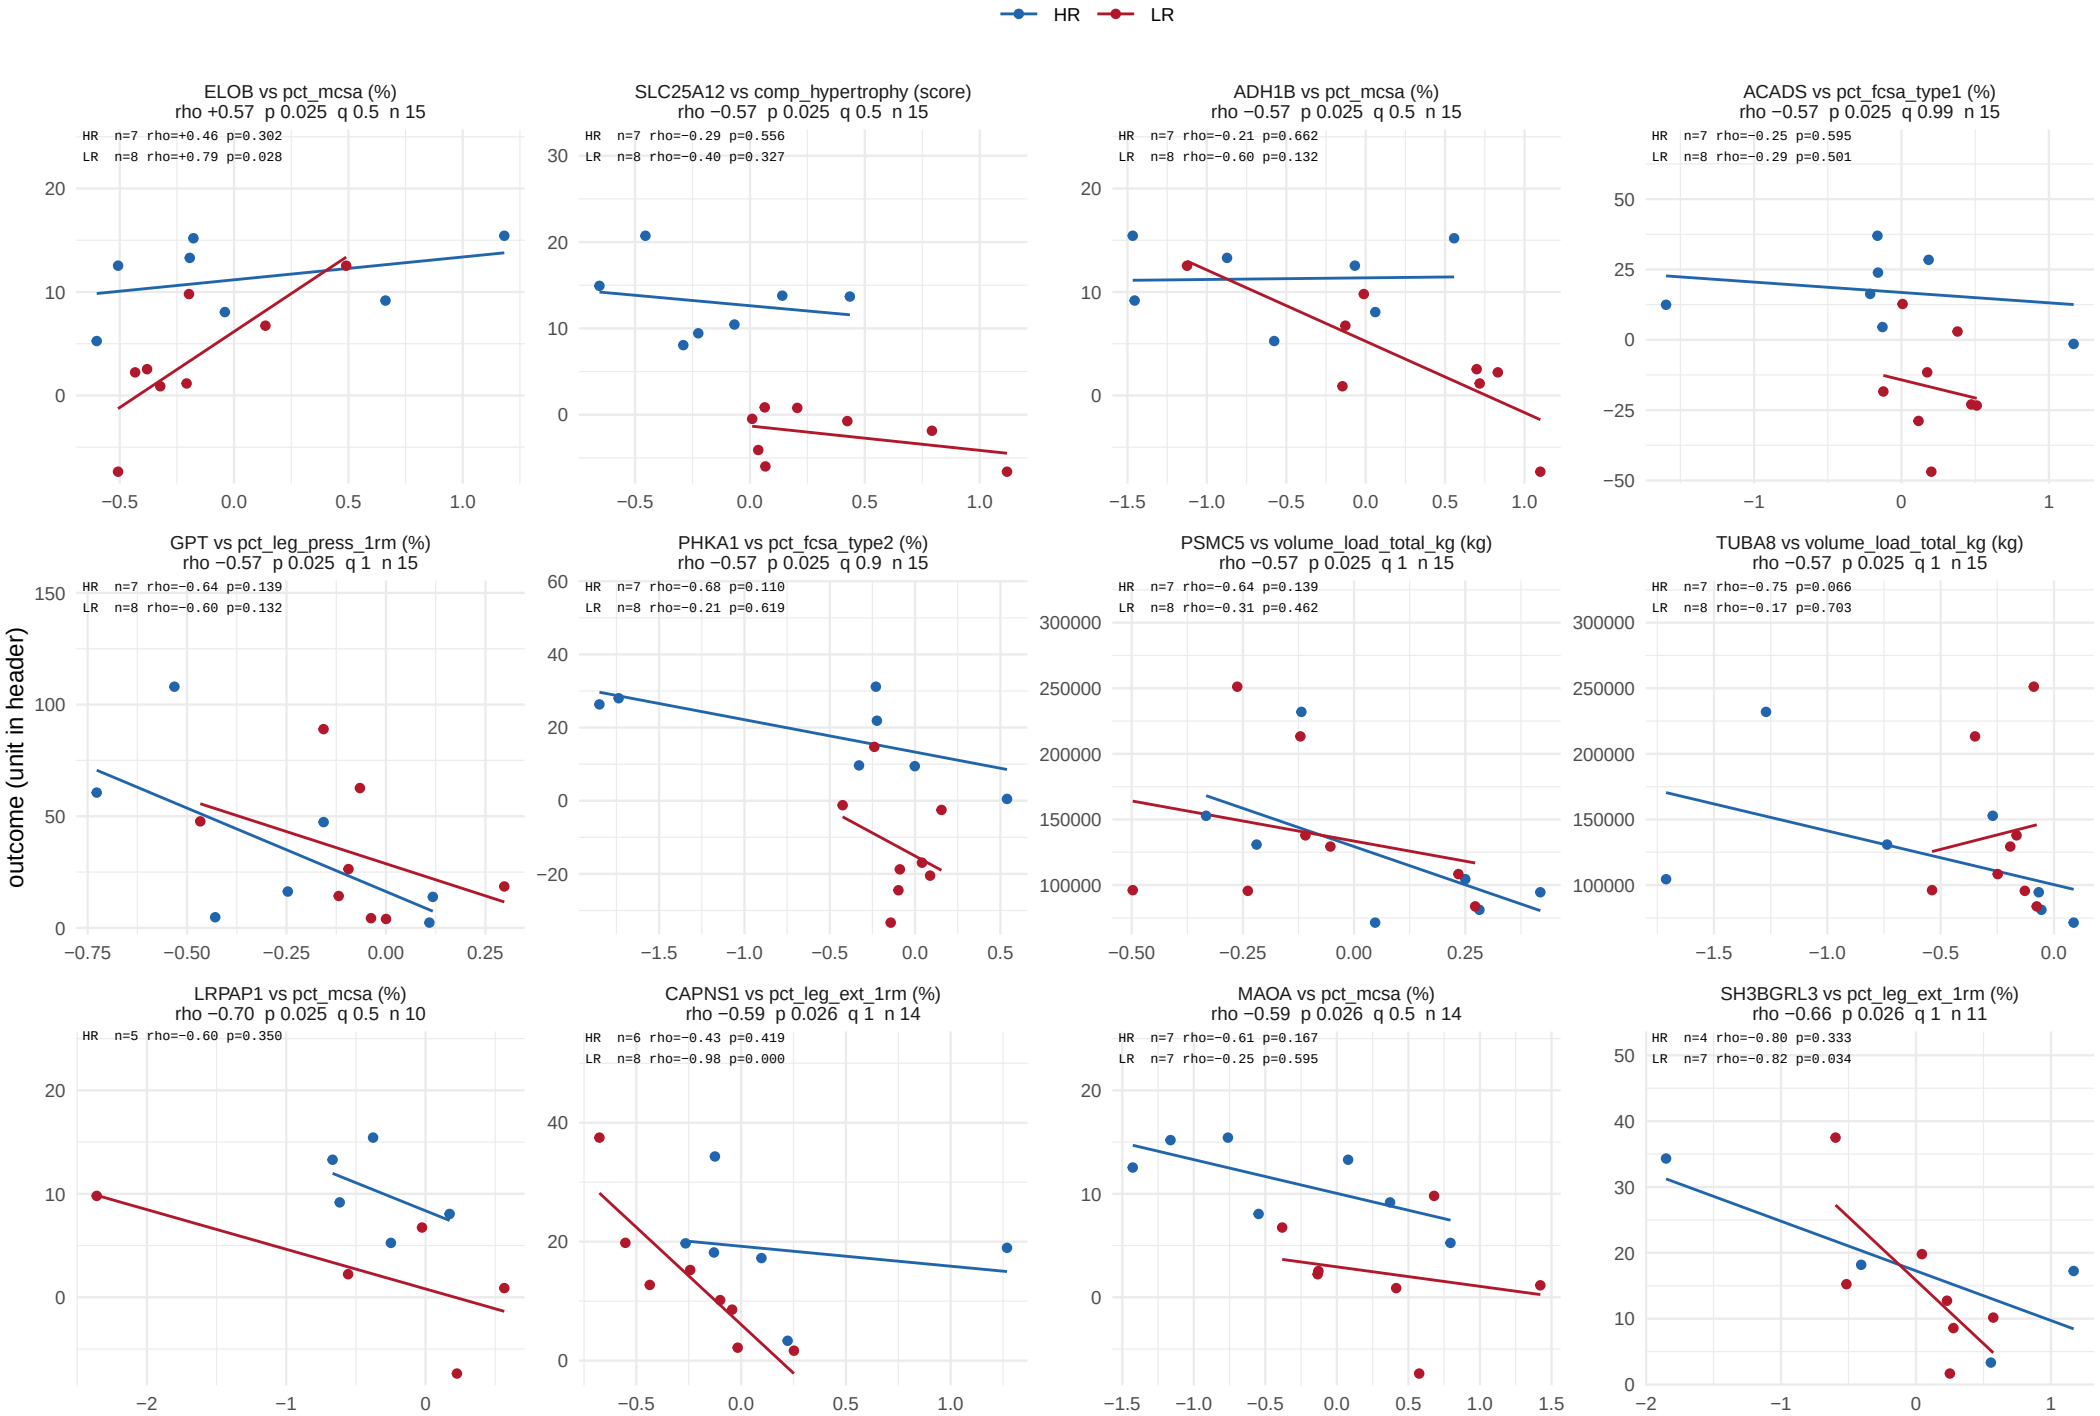

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


610 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 28 of 51.

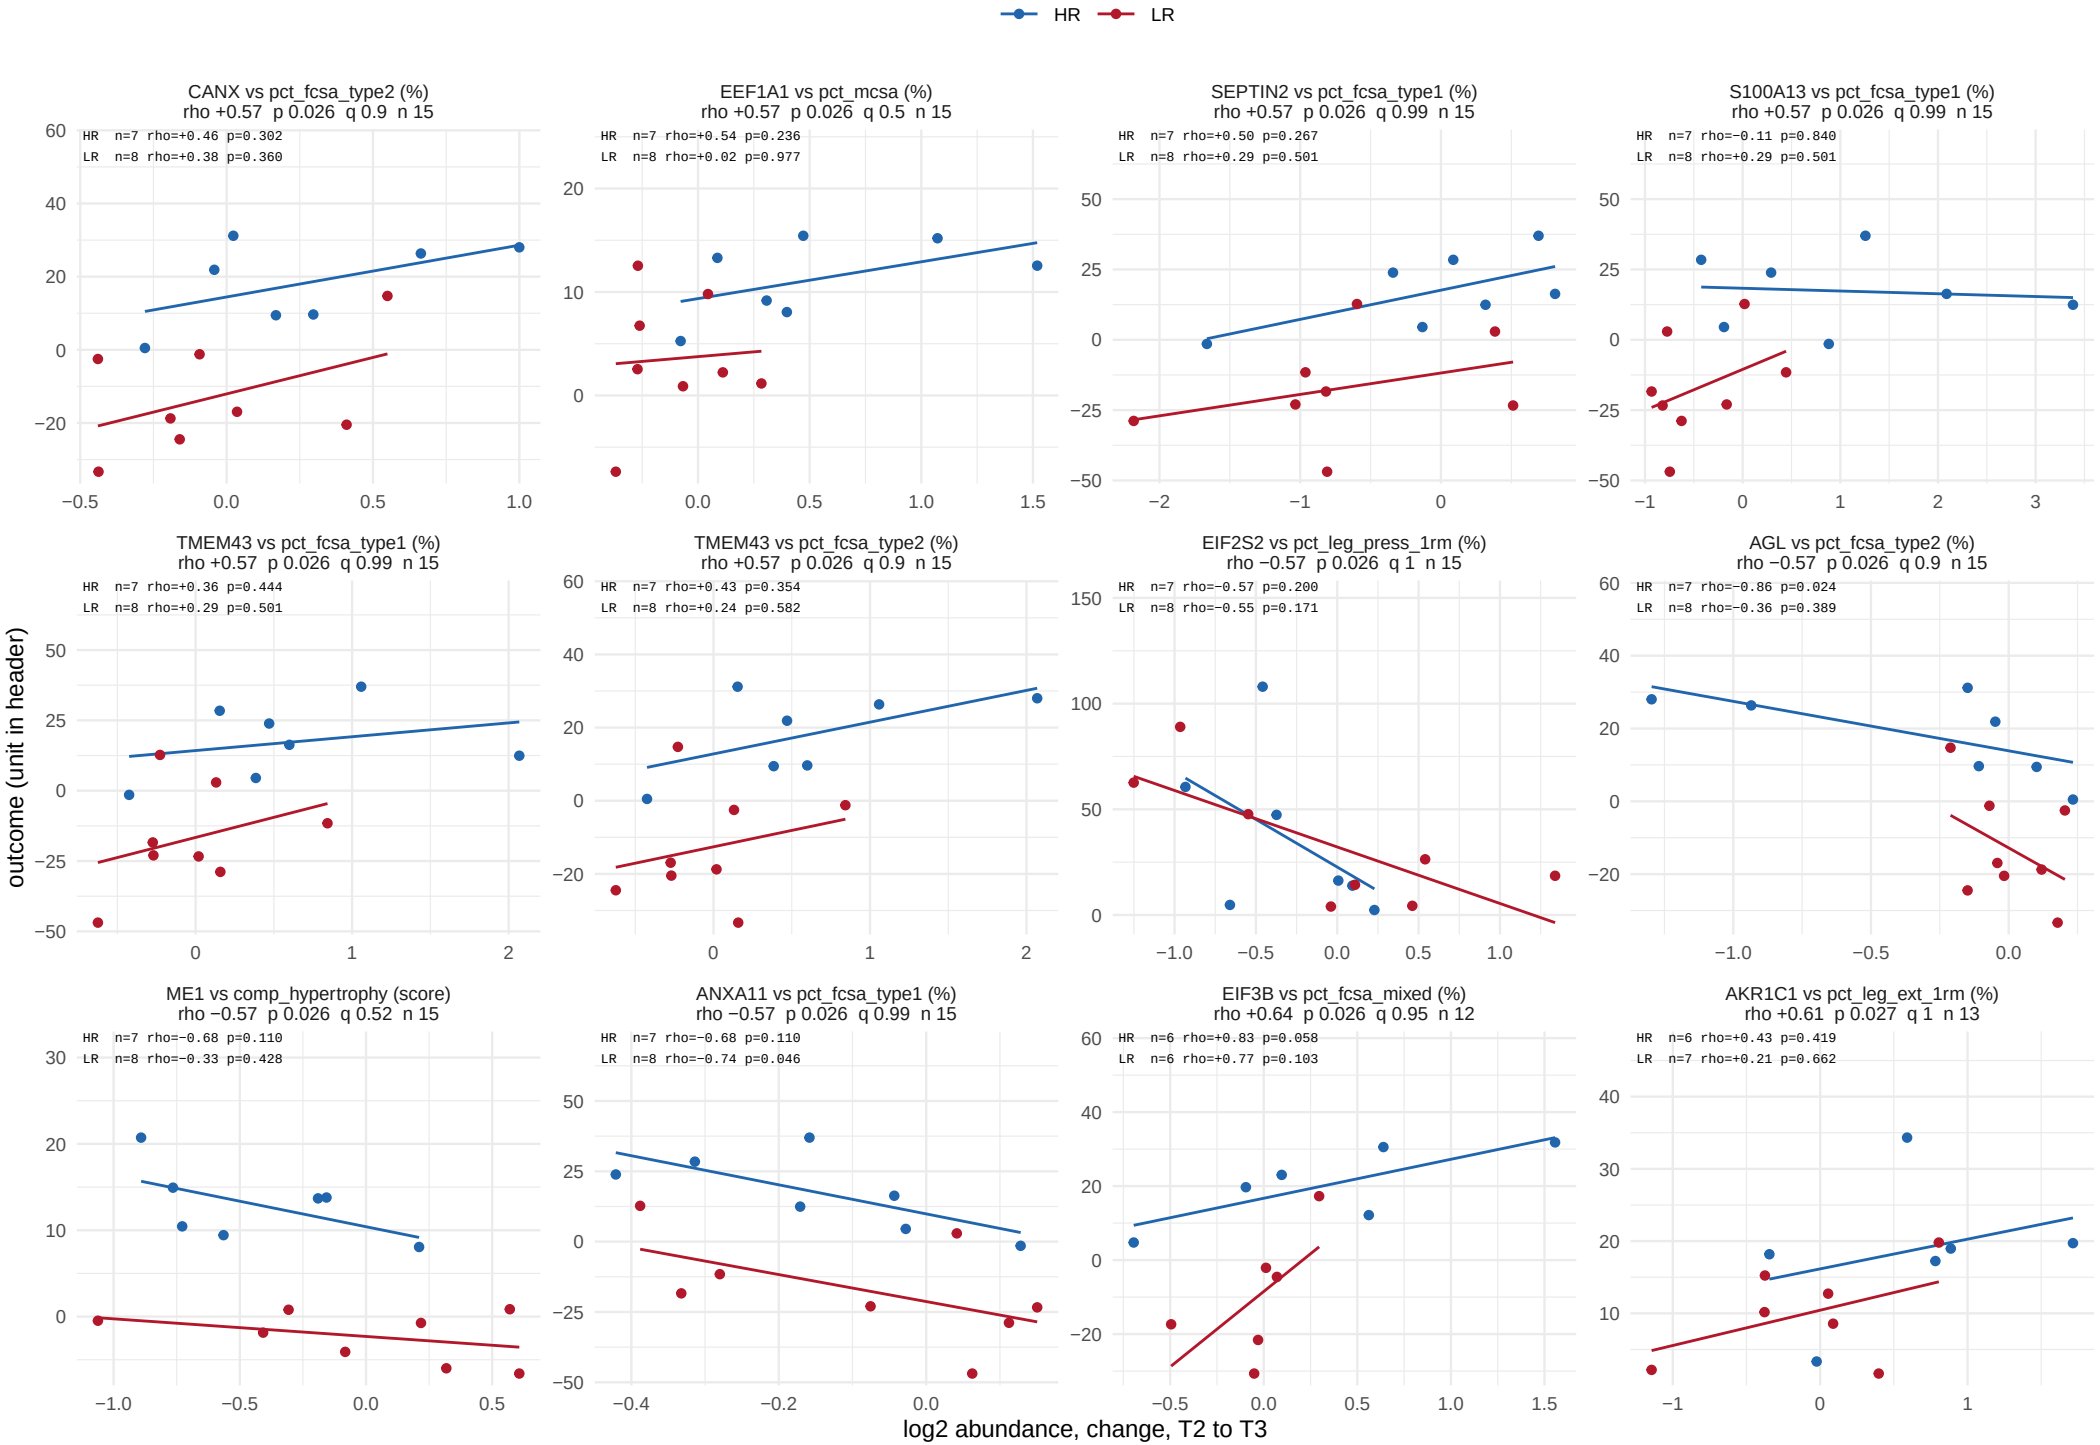

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


610 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 29 of 51.

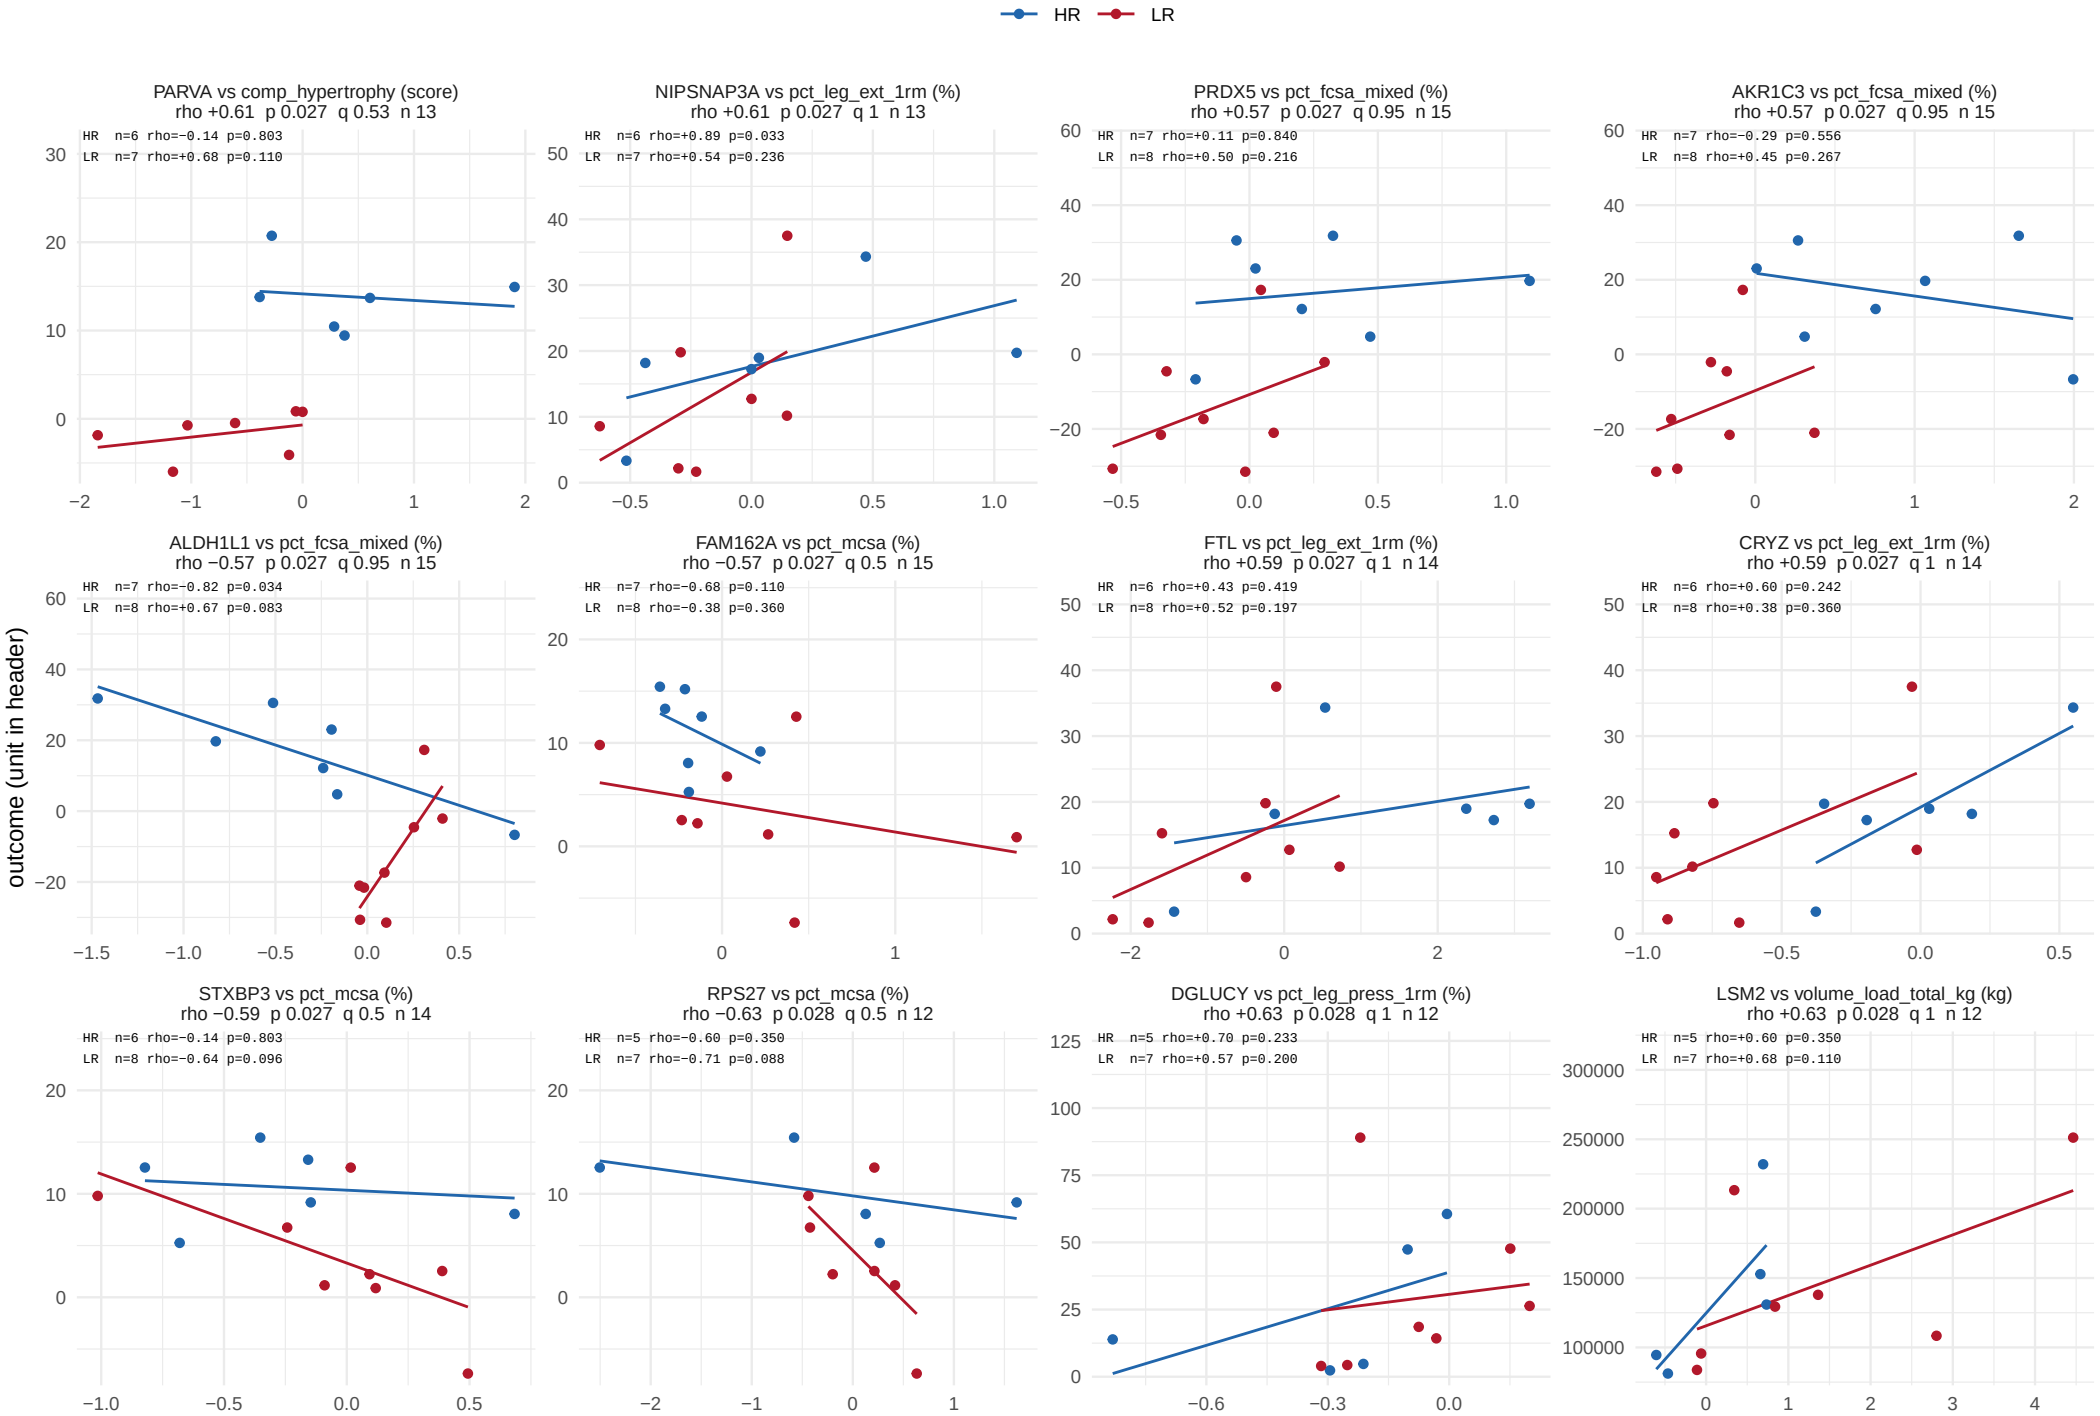

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


610 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 30 of 51.

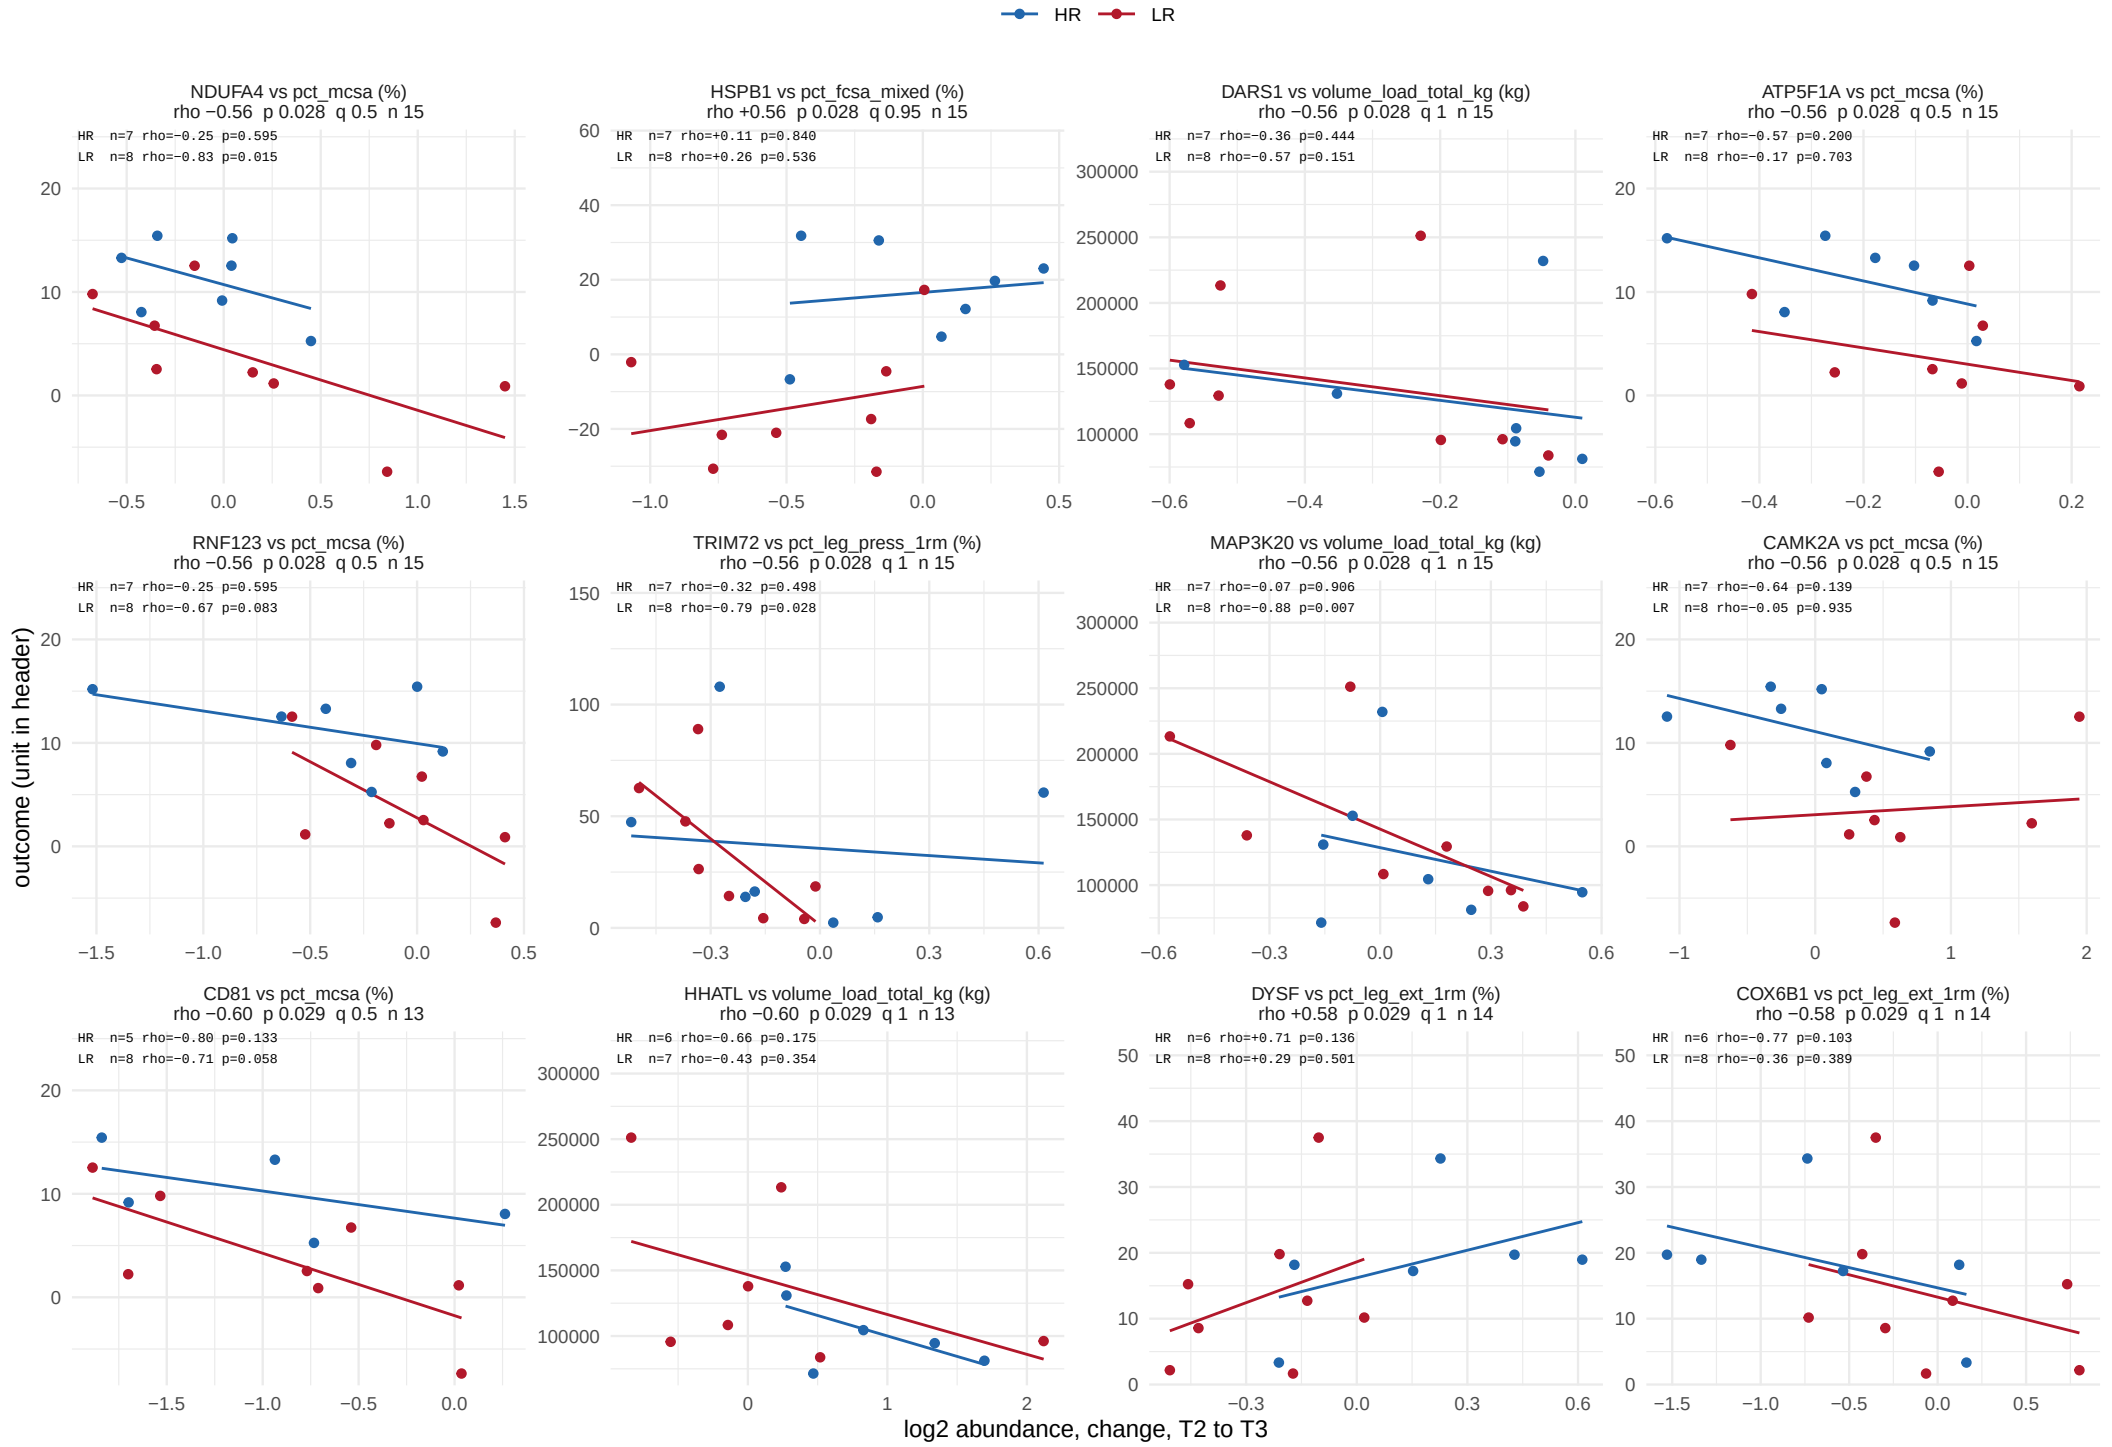

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


610 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 31 of 51.

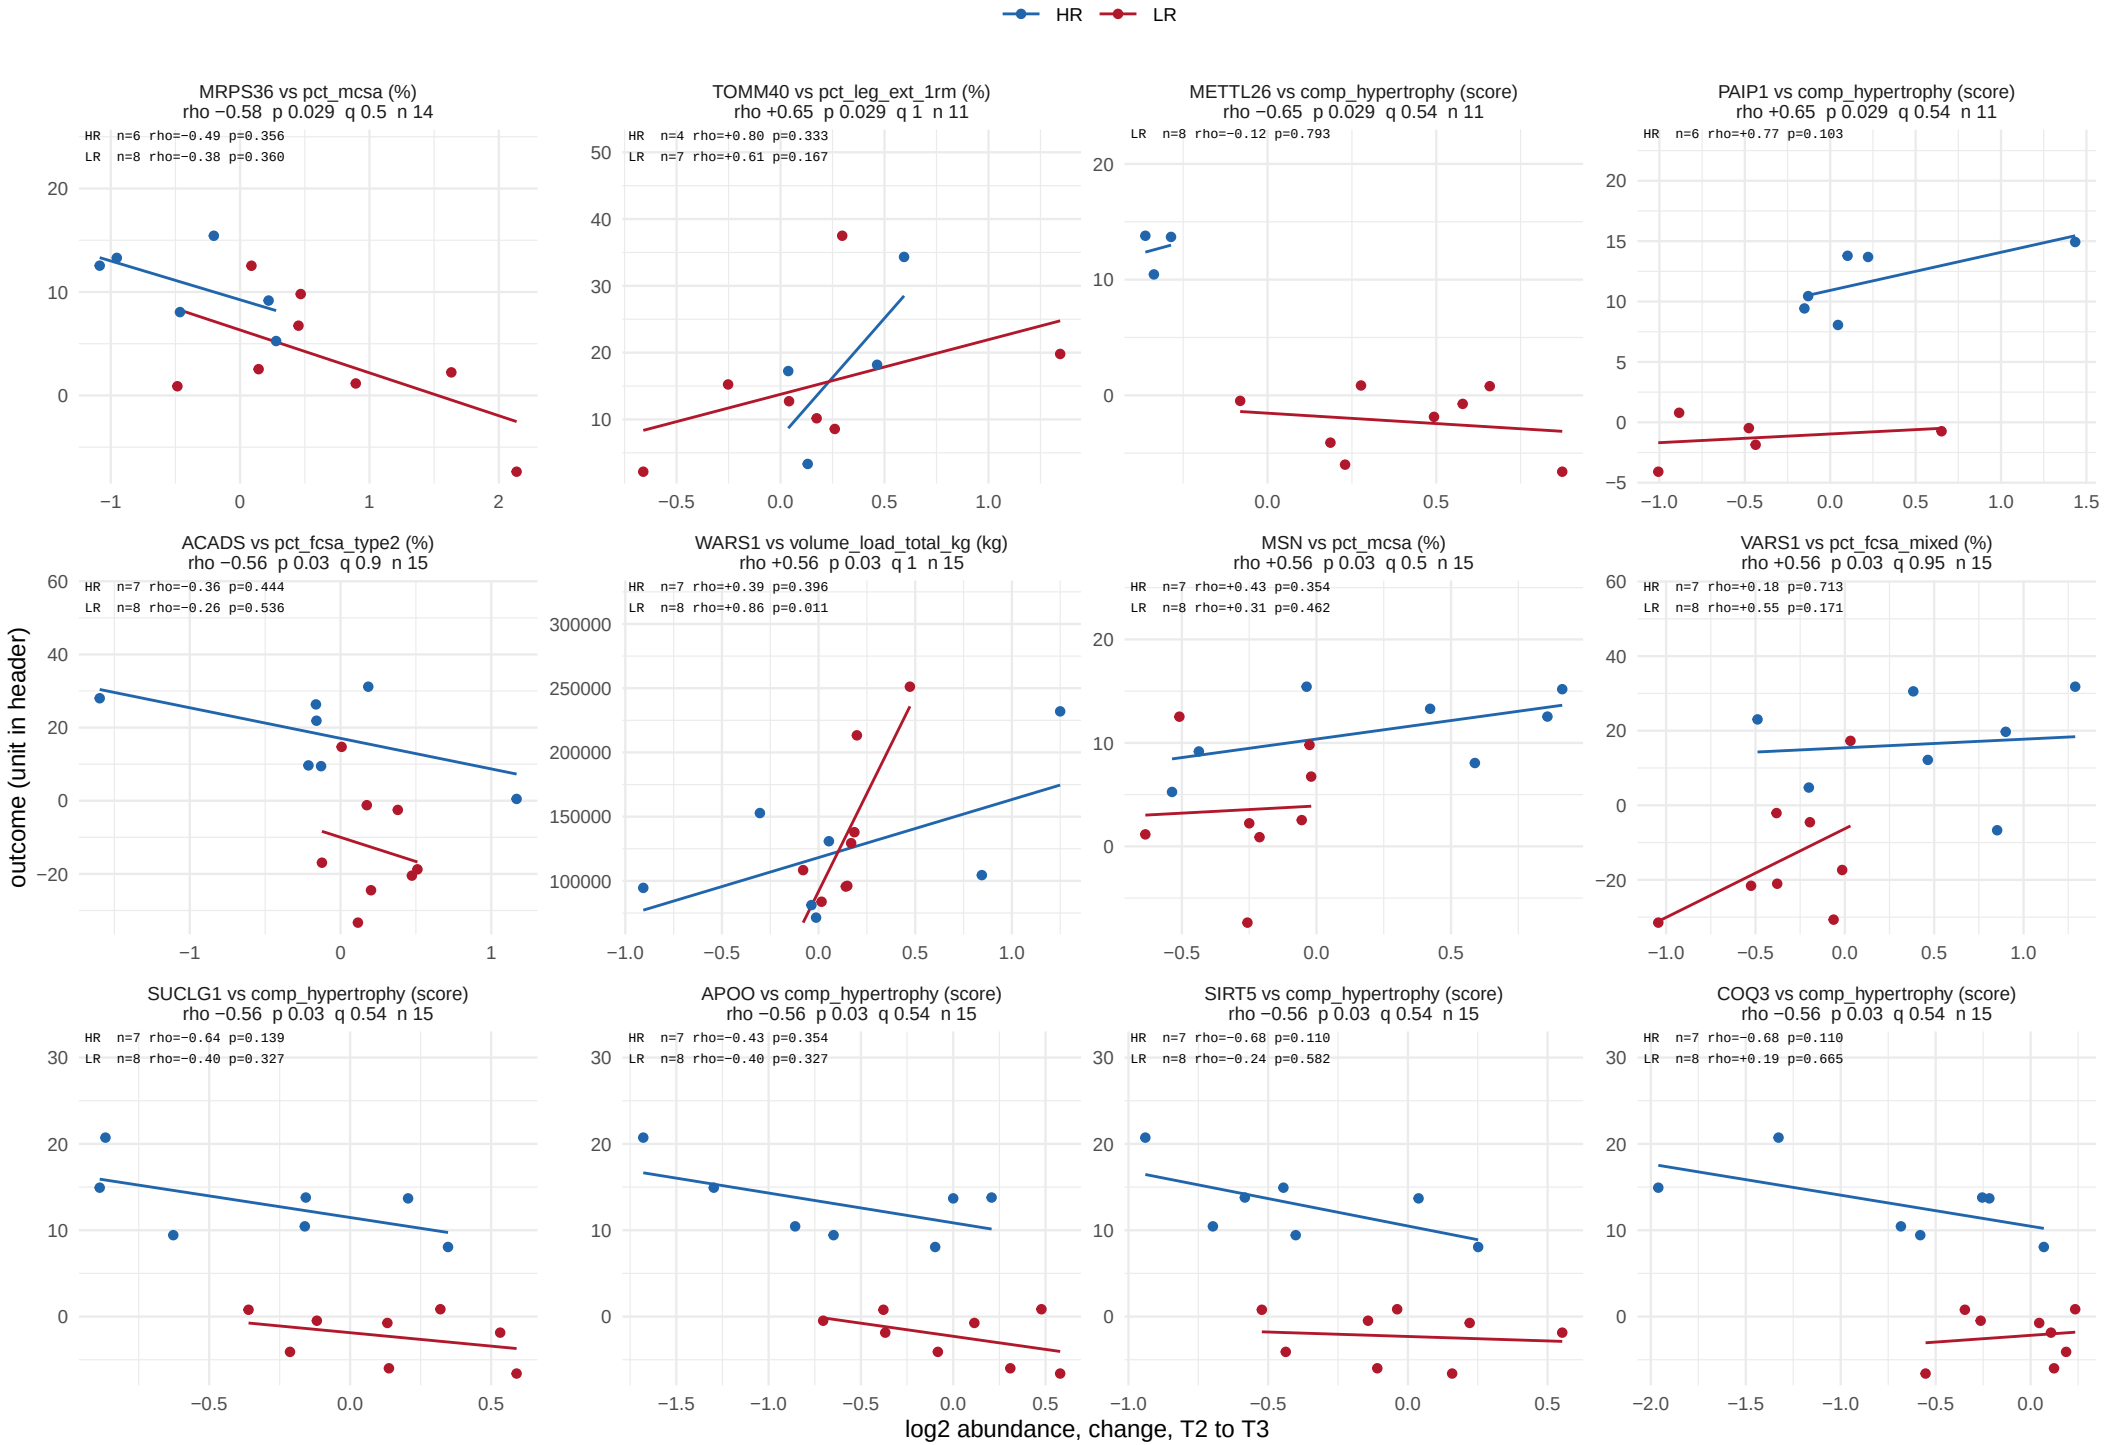

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


610 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 32 of 51.

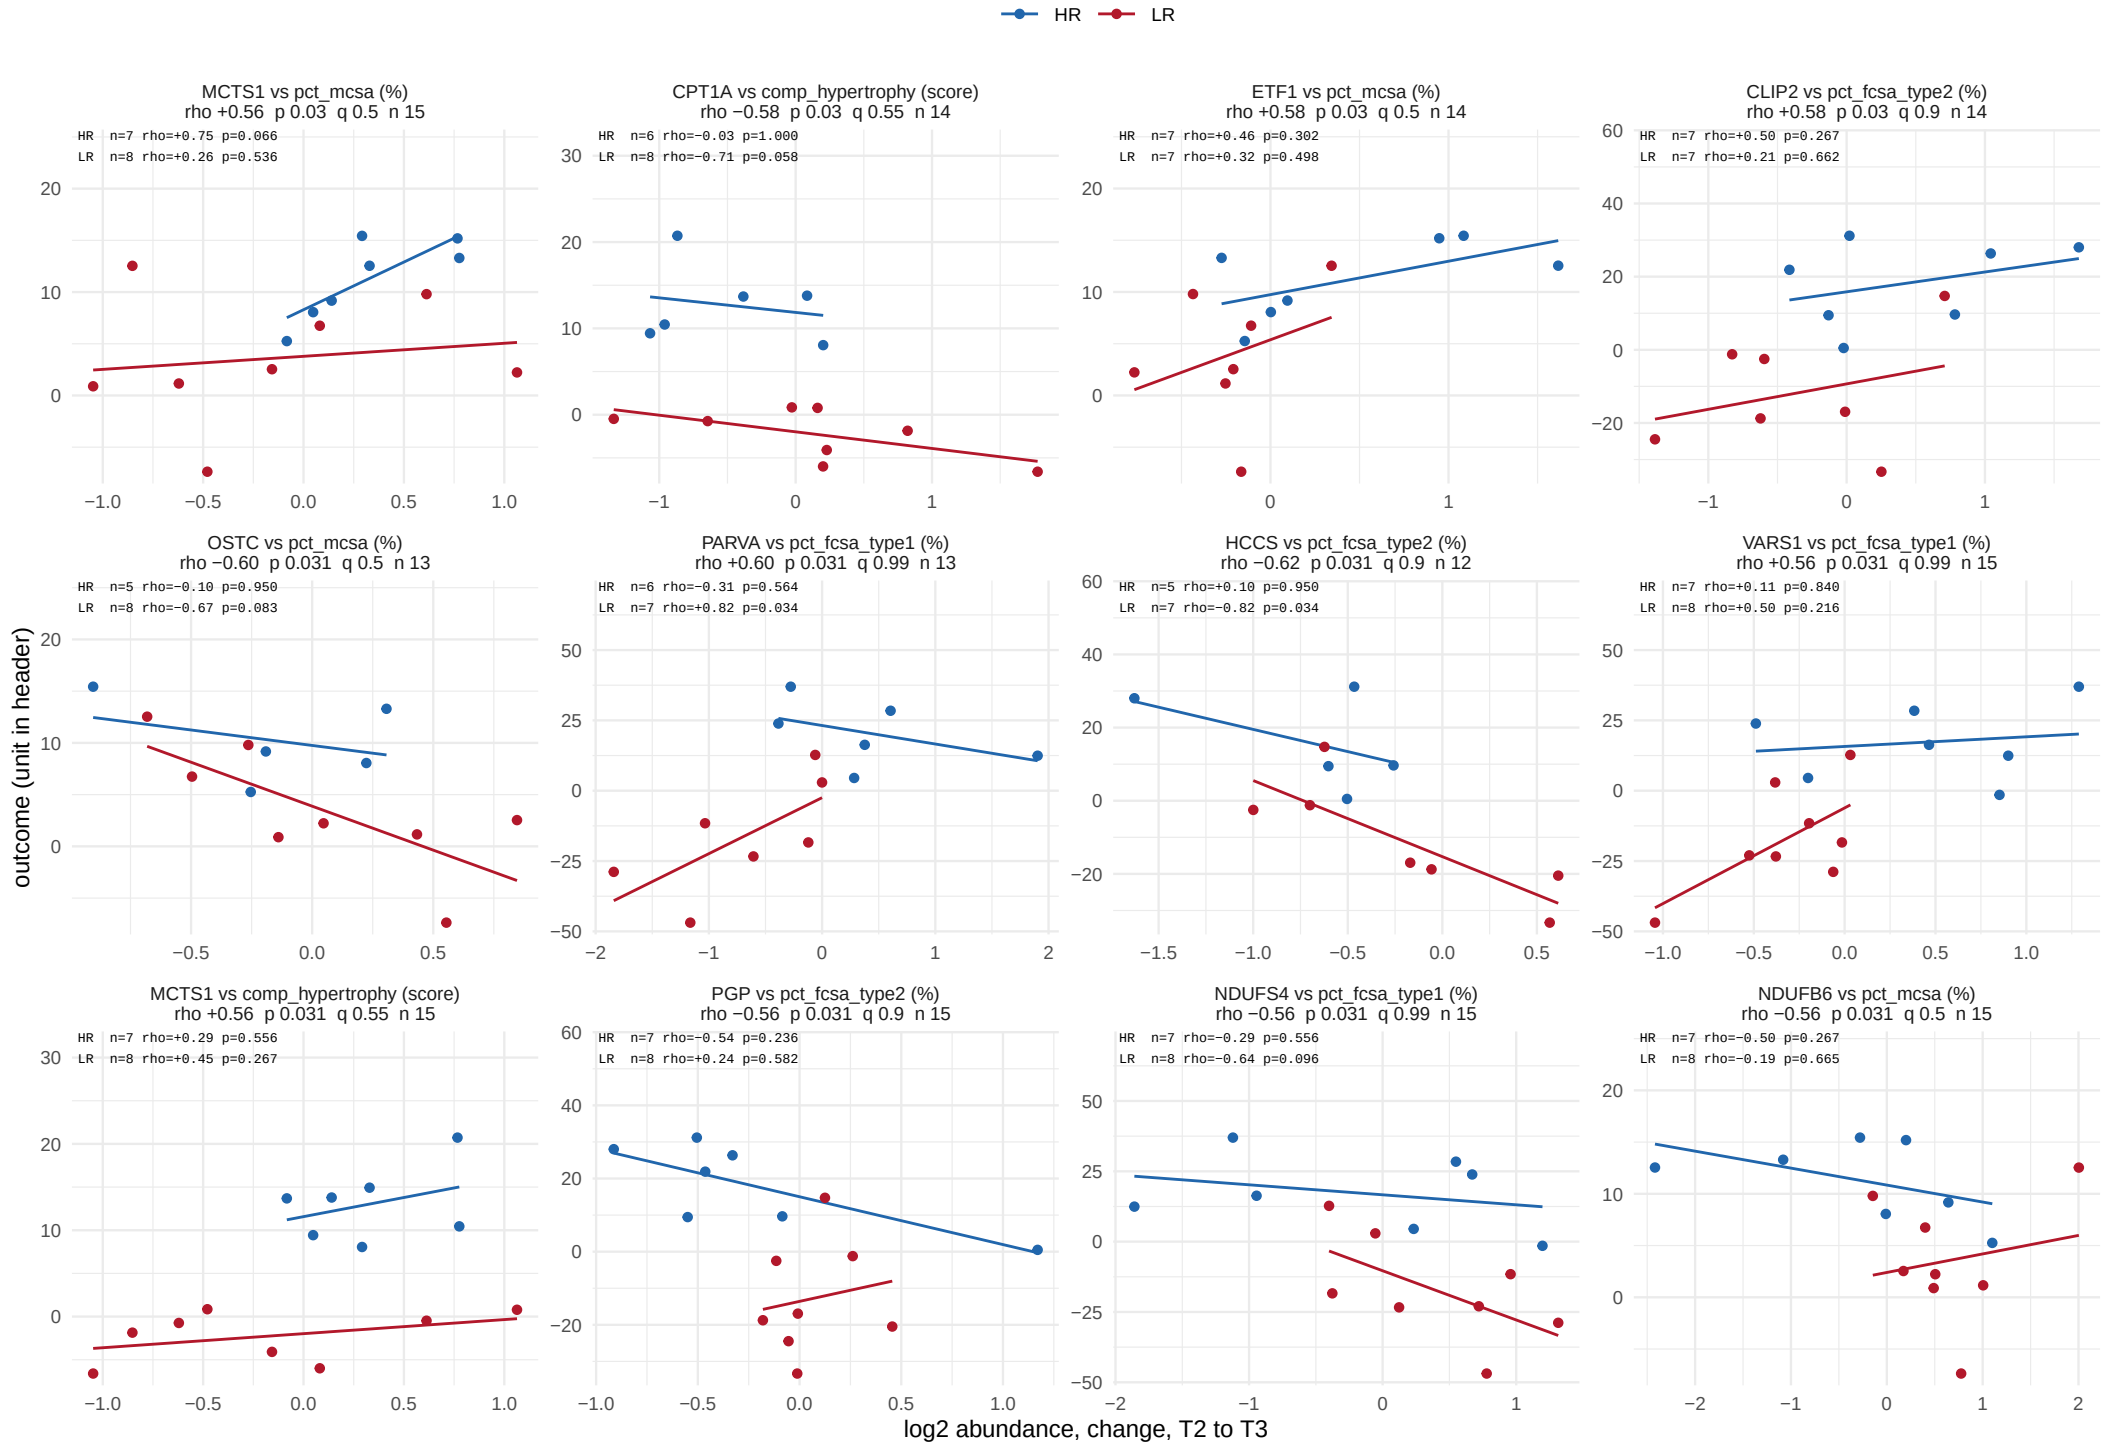

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


610 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 33 of 51.

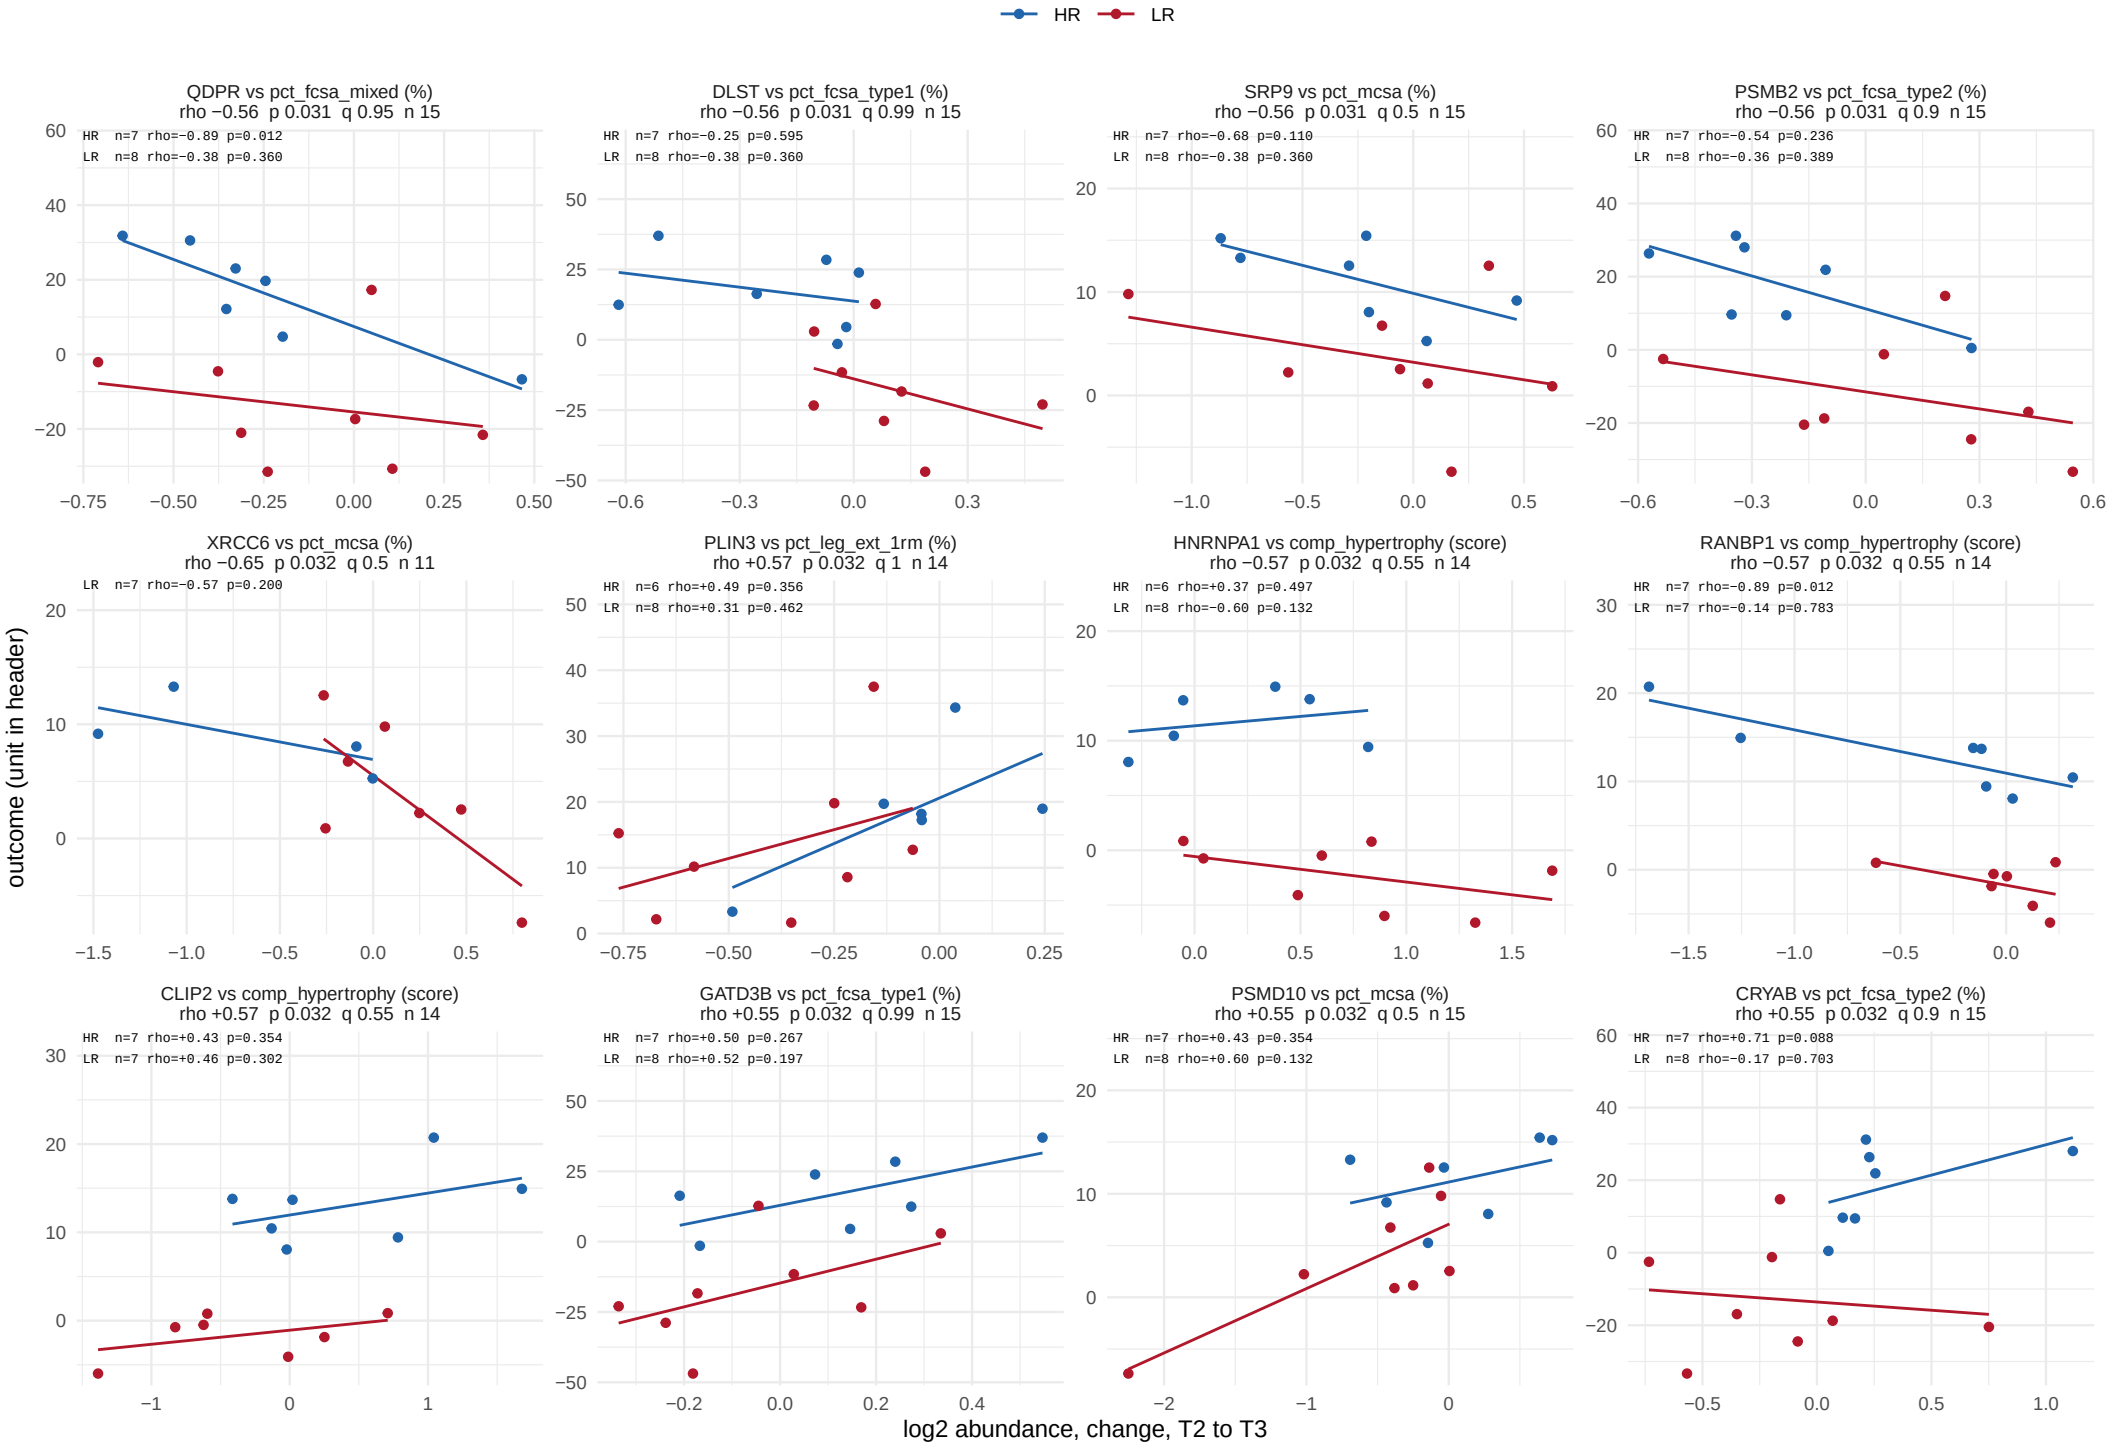

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


610 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 34 of 51.

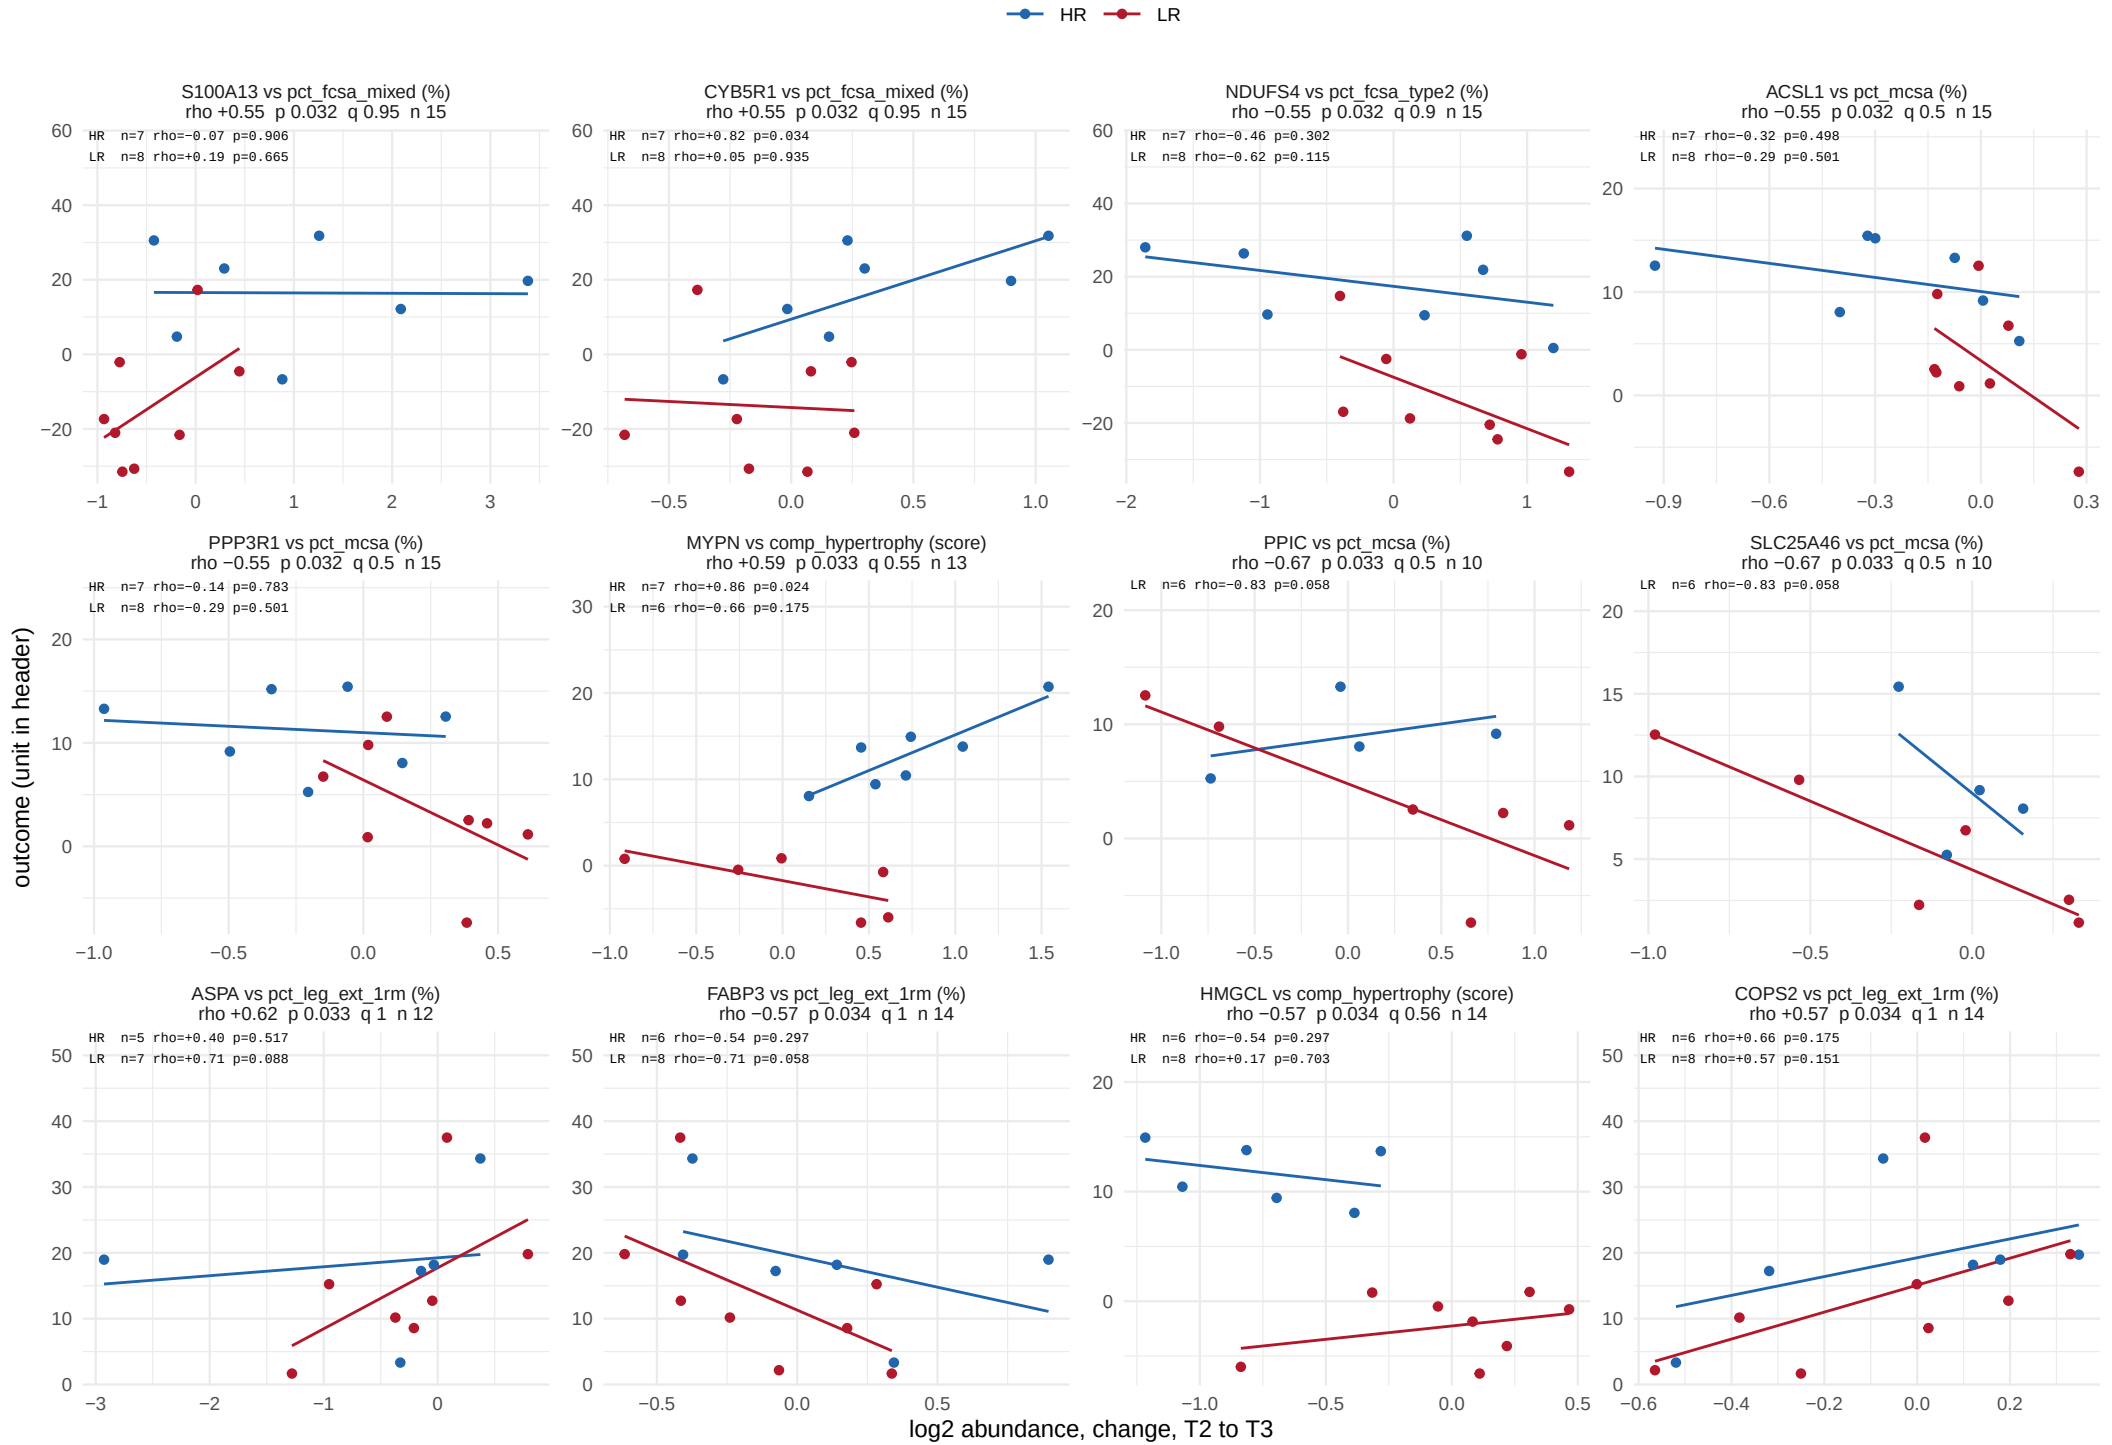

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window

610 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 35 of 51.

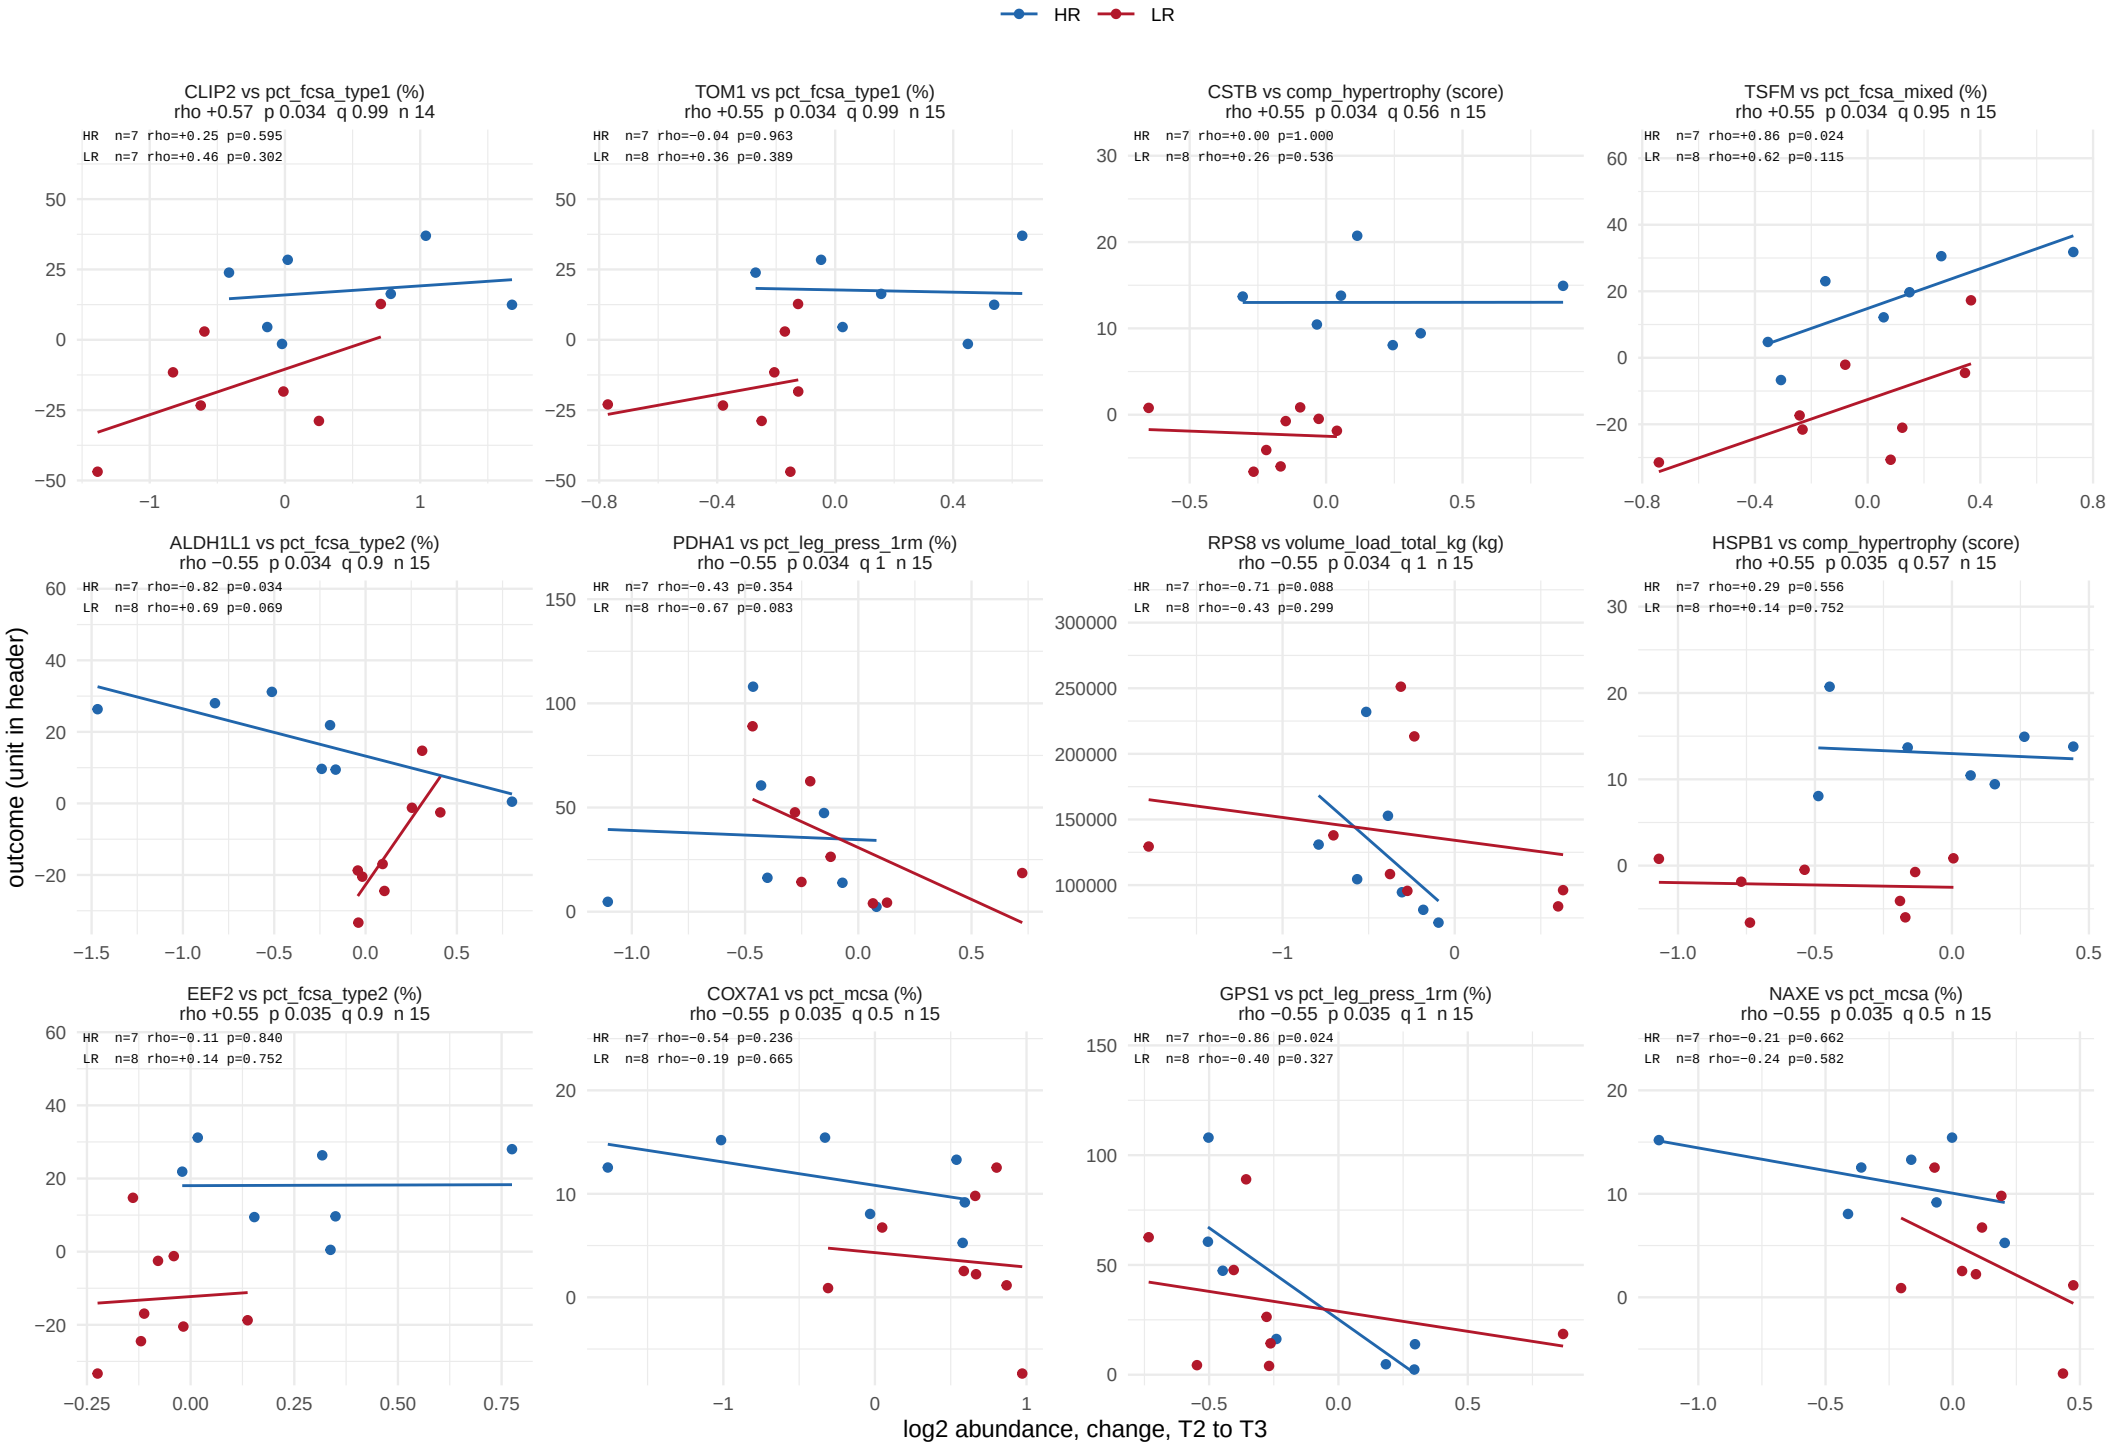

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


610 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 36 of 51.



One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


610 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 37 of 51.

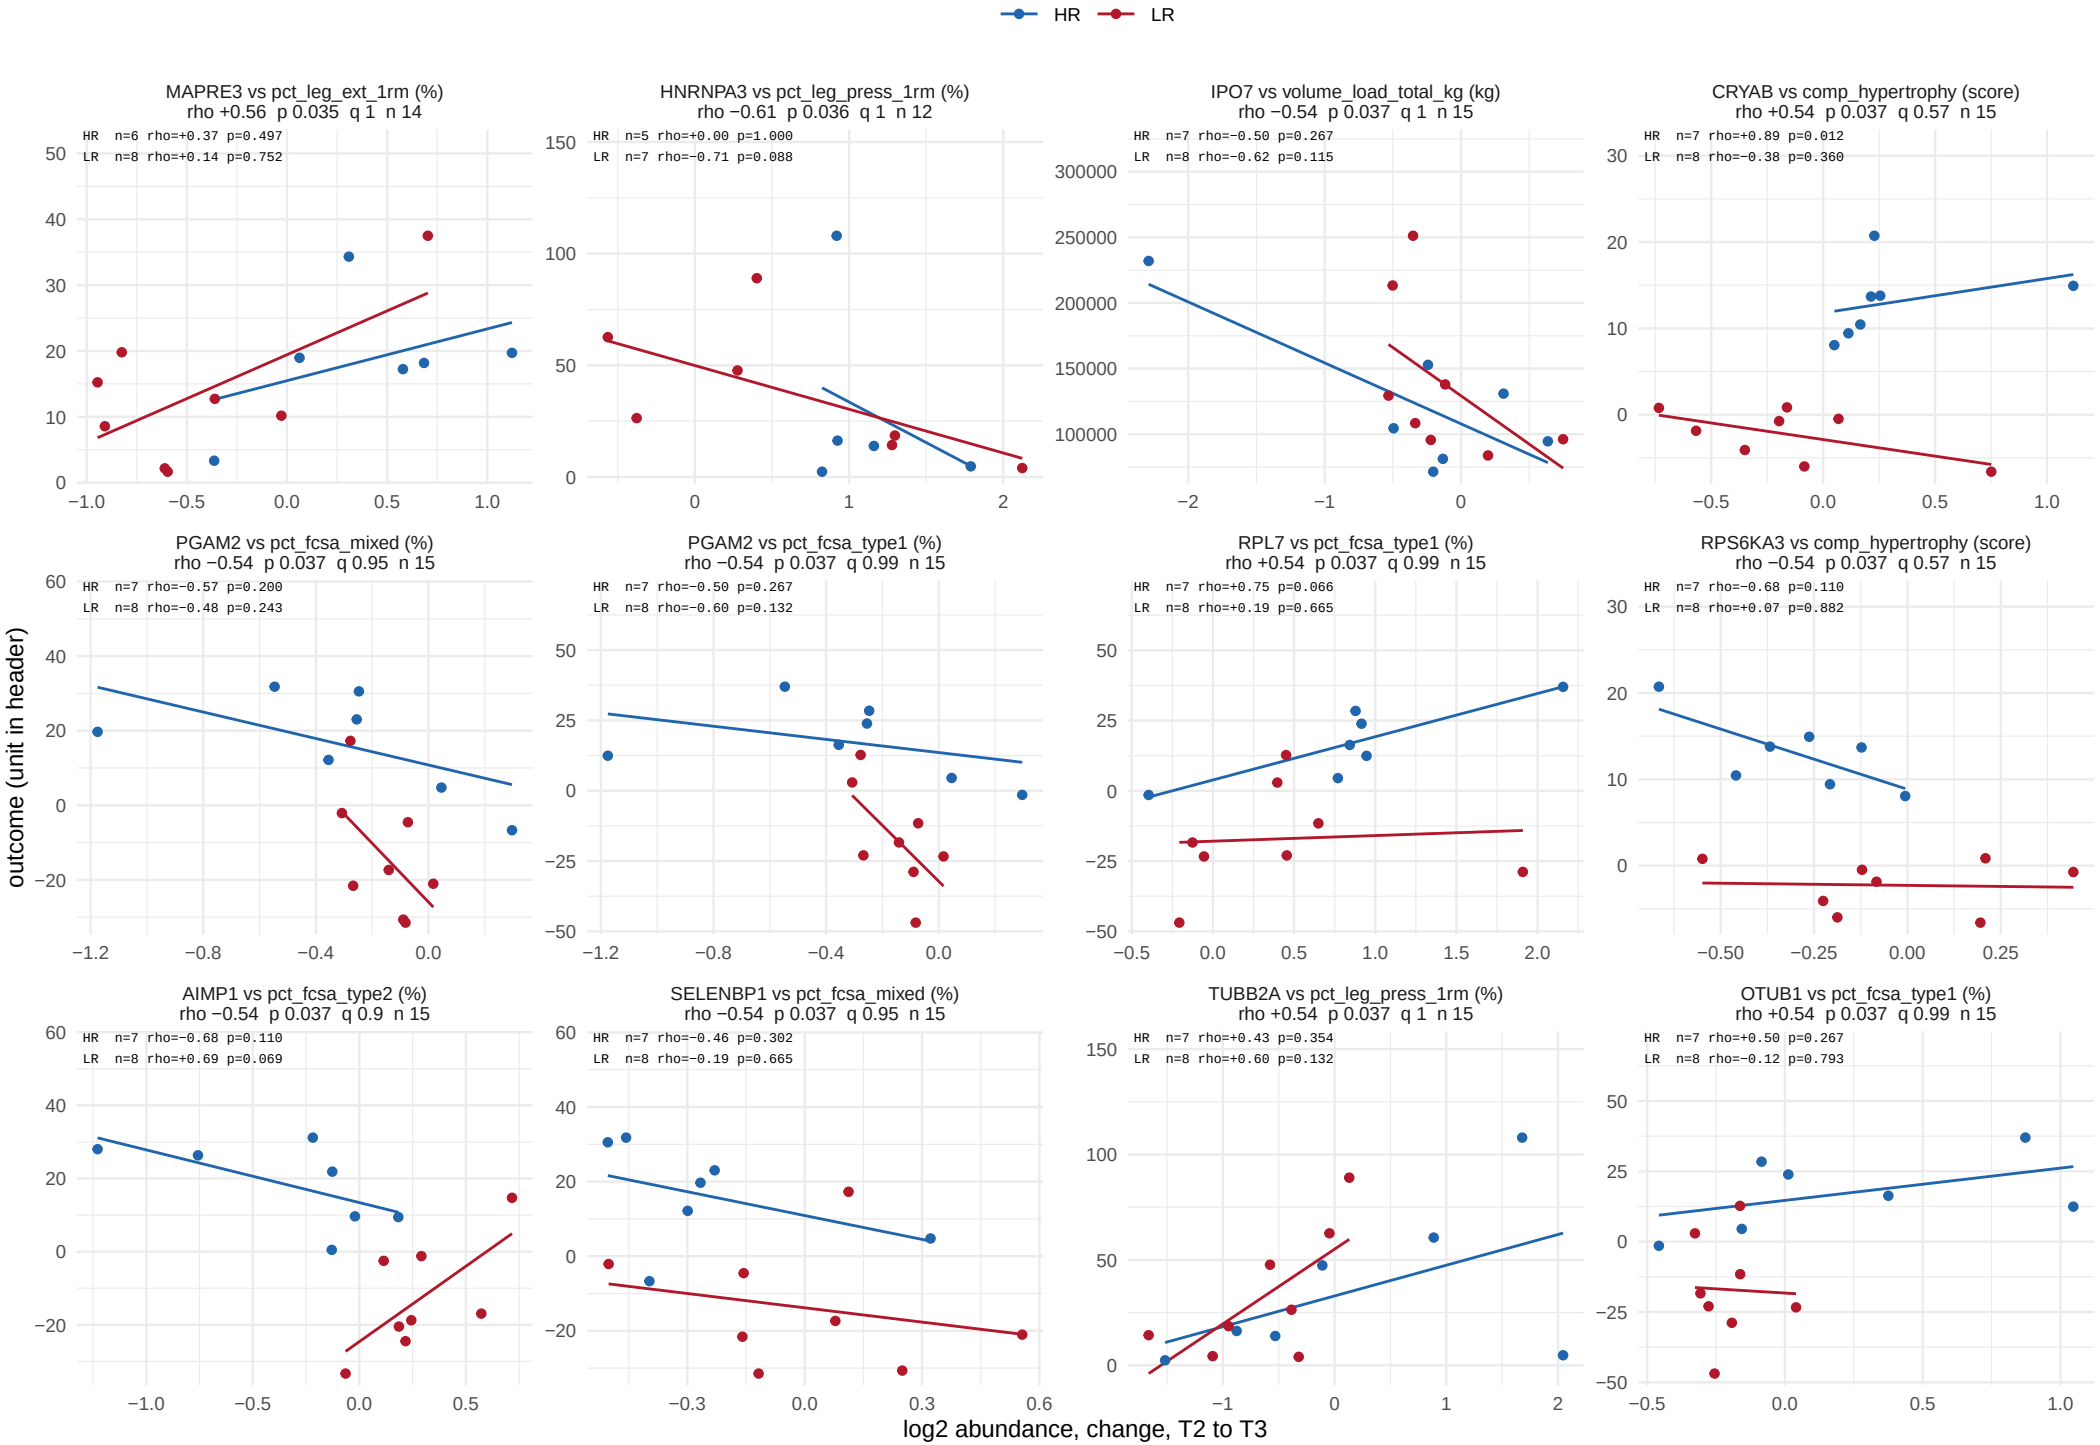

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


610 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 38 of 51.

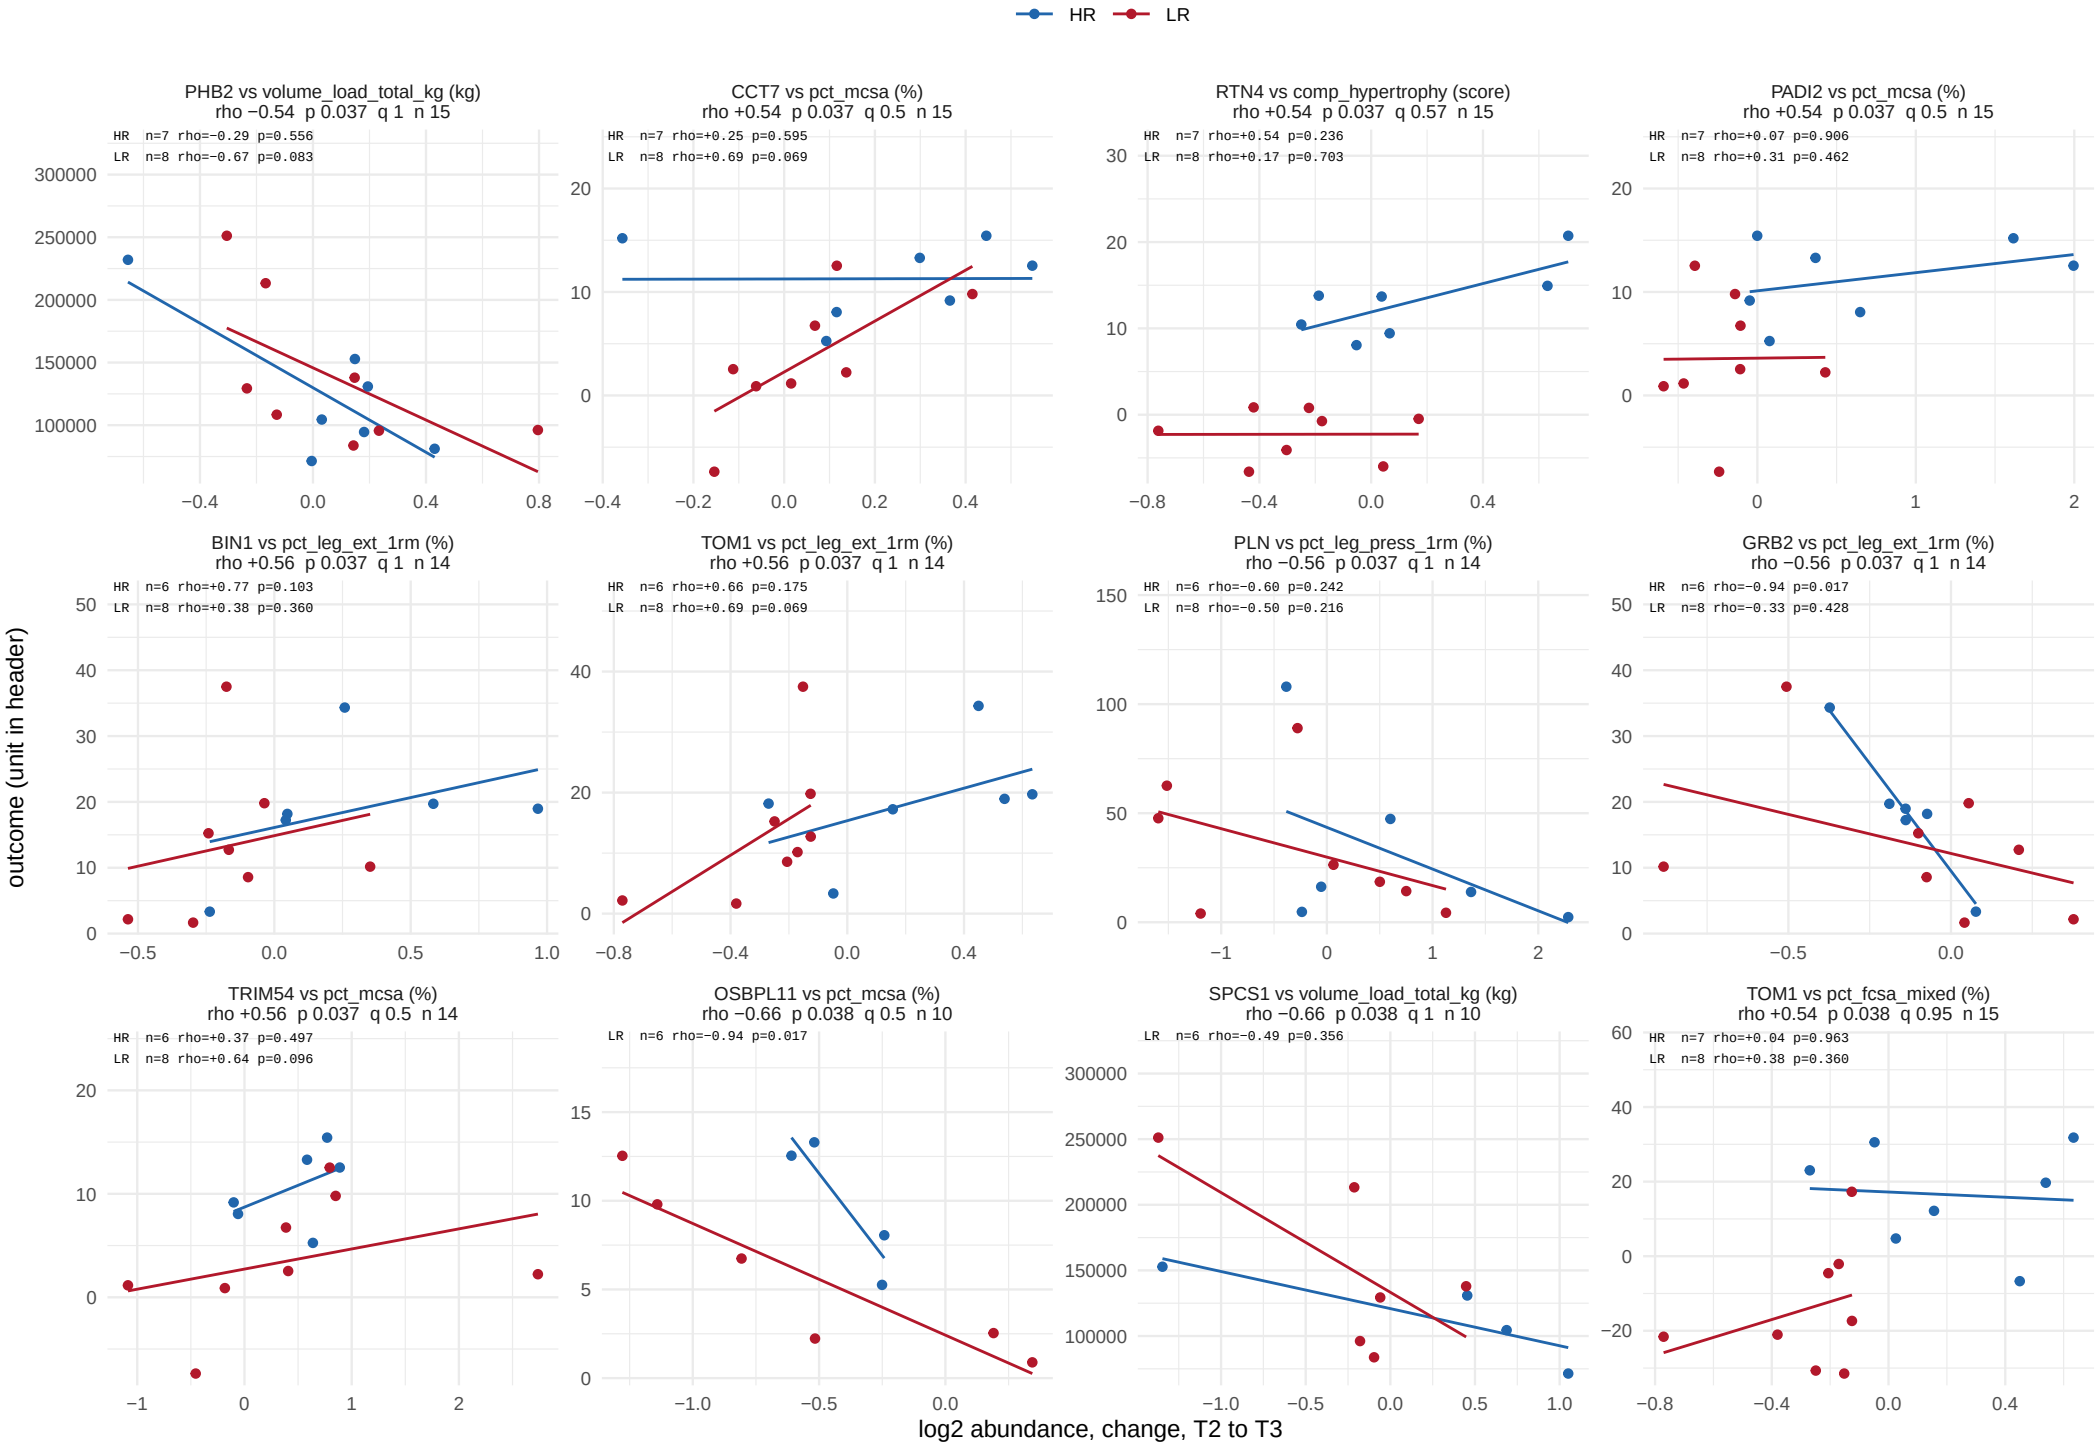

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


610 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 39 of 51.

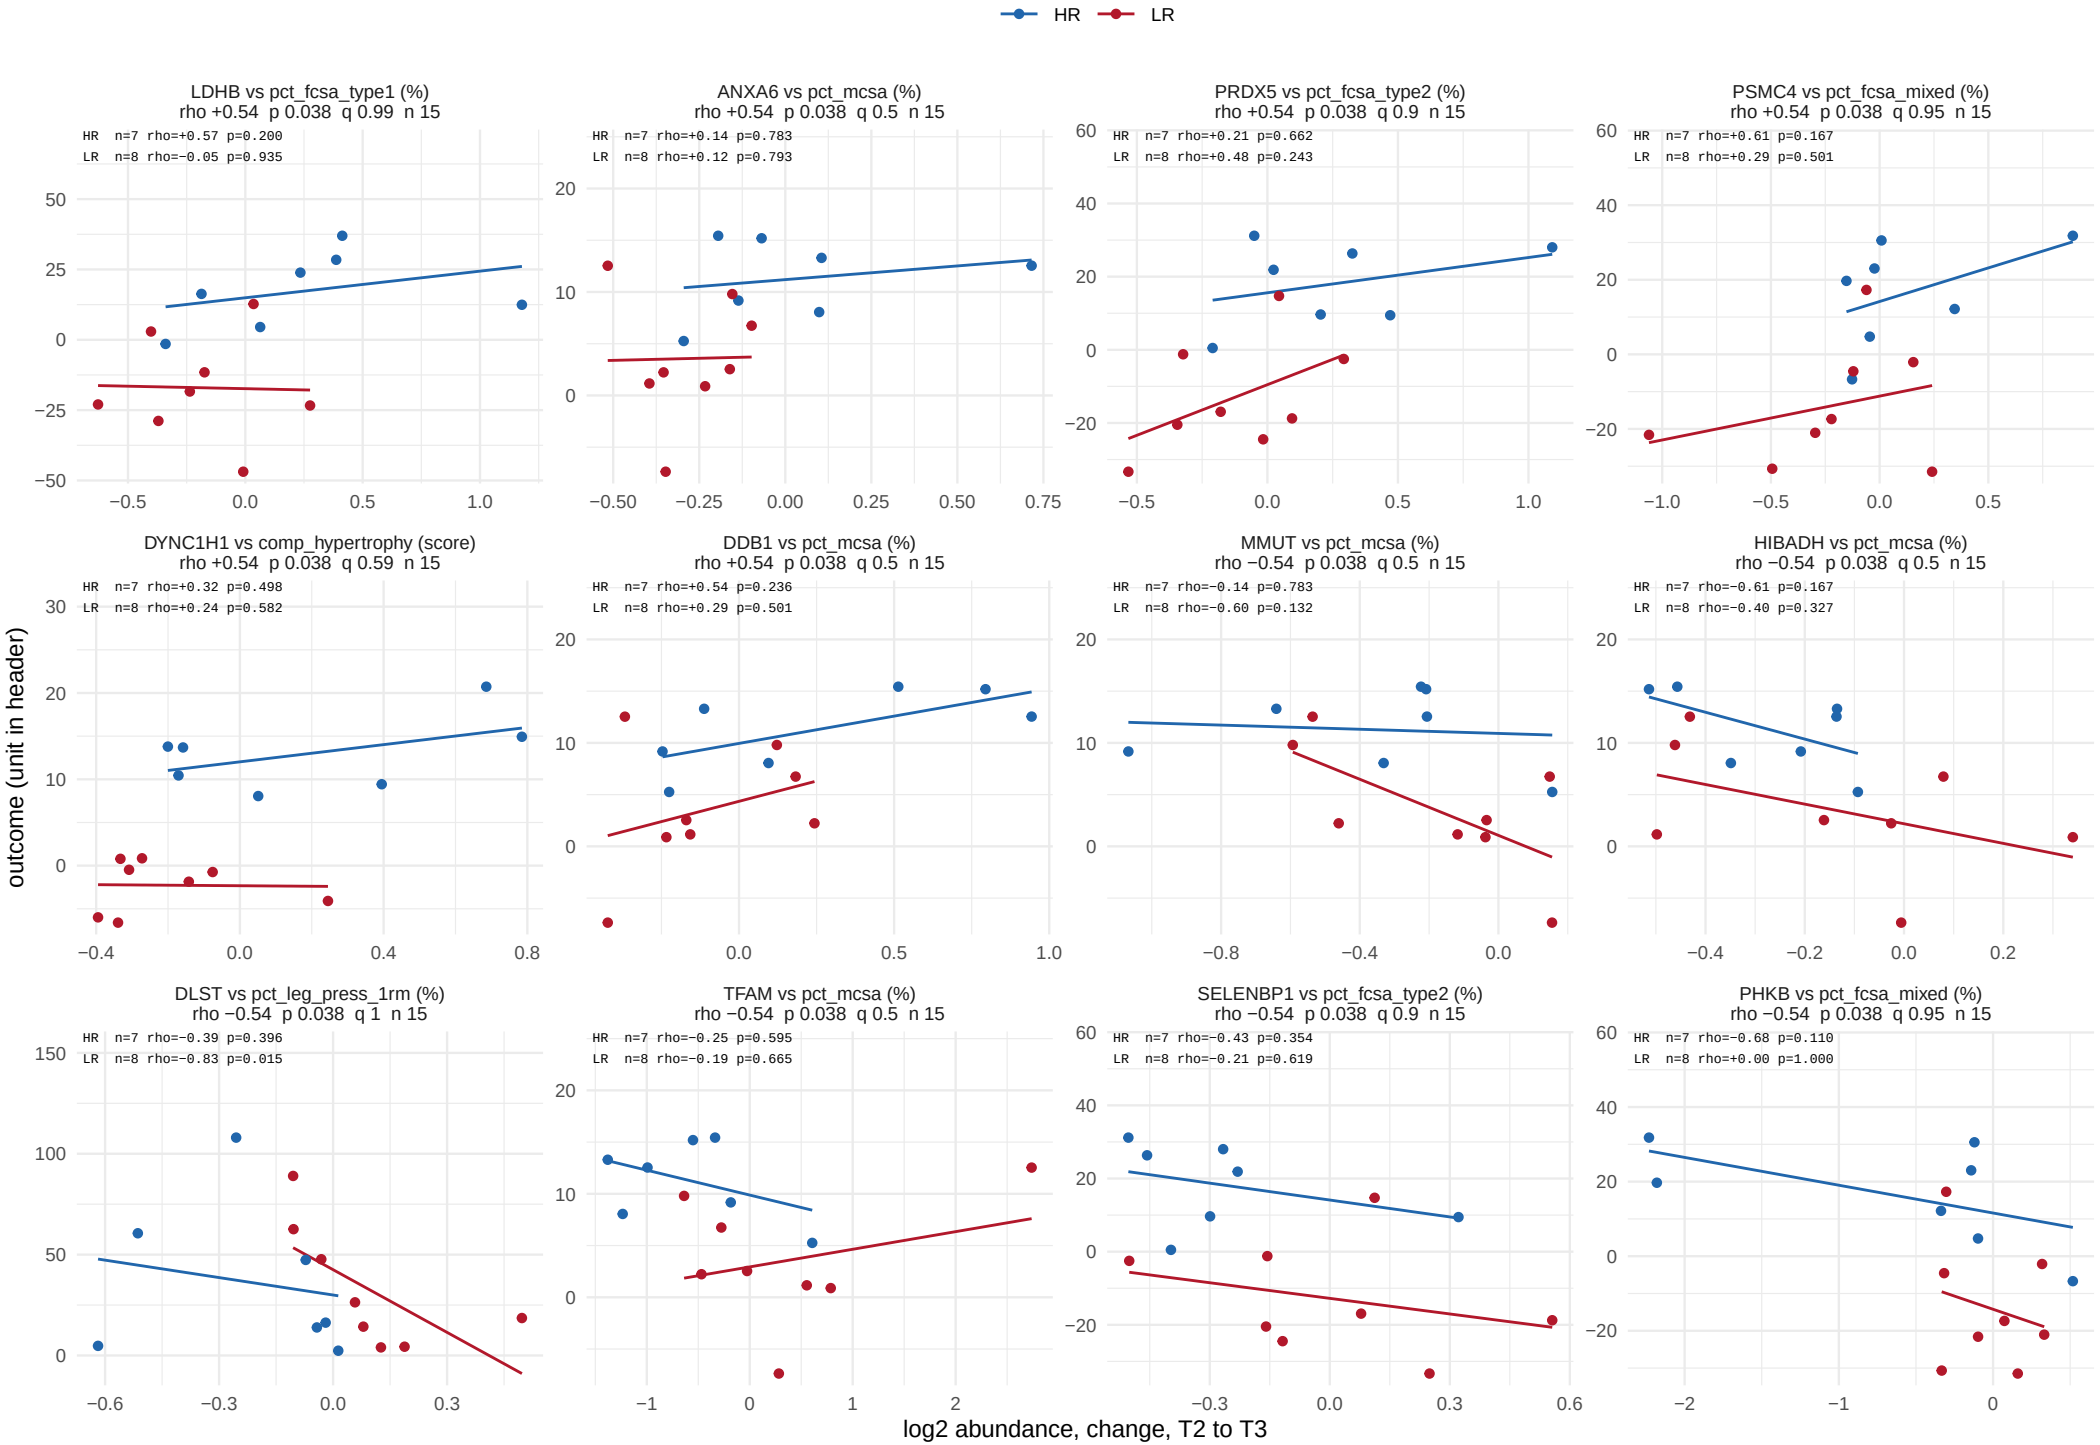

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


610 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 40 of 51.

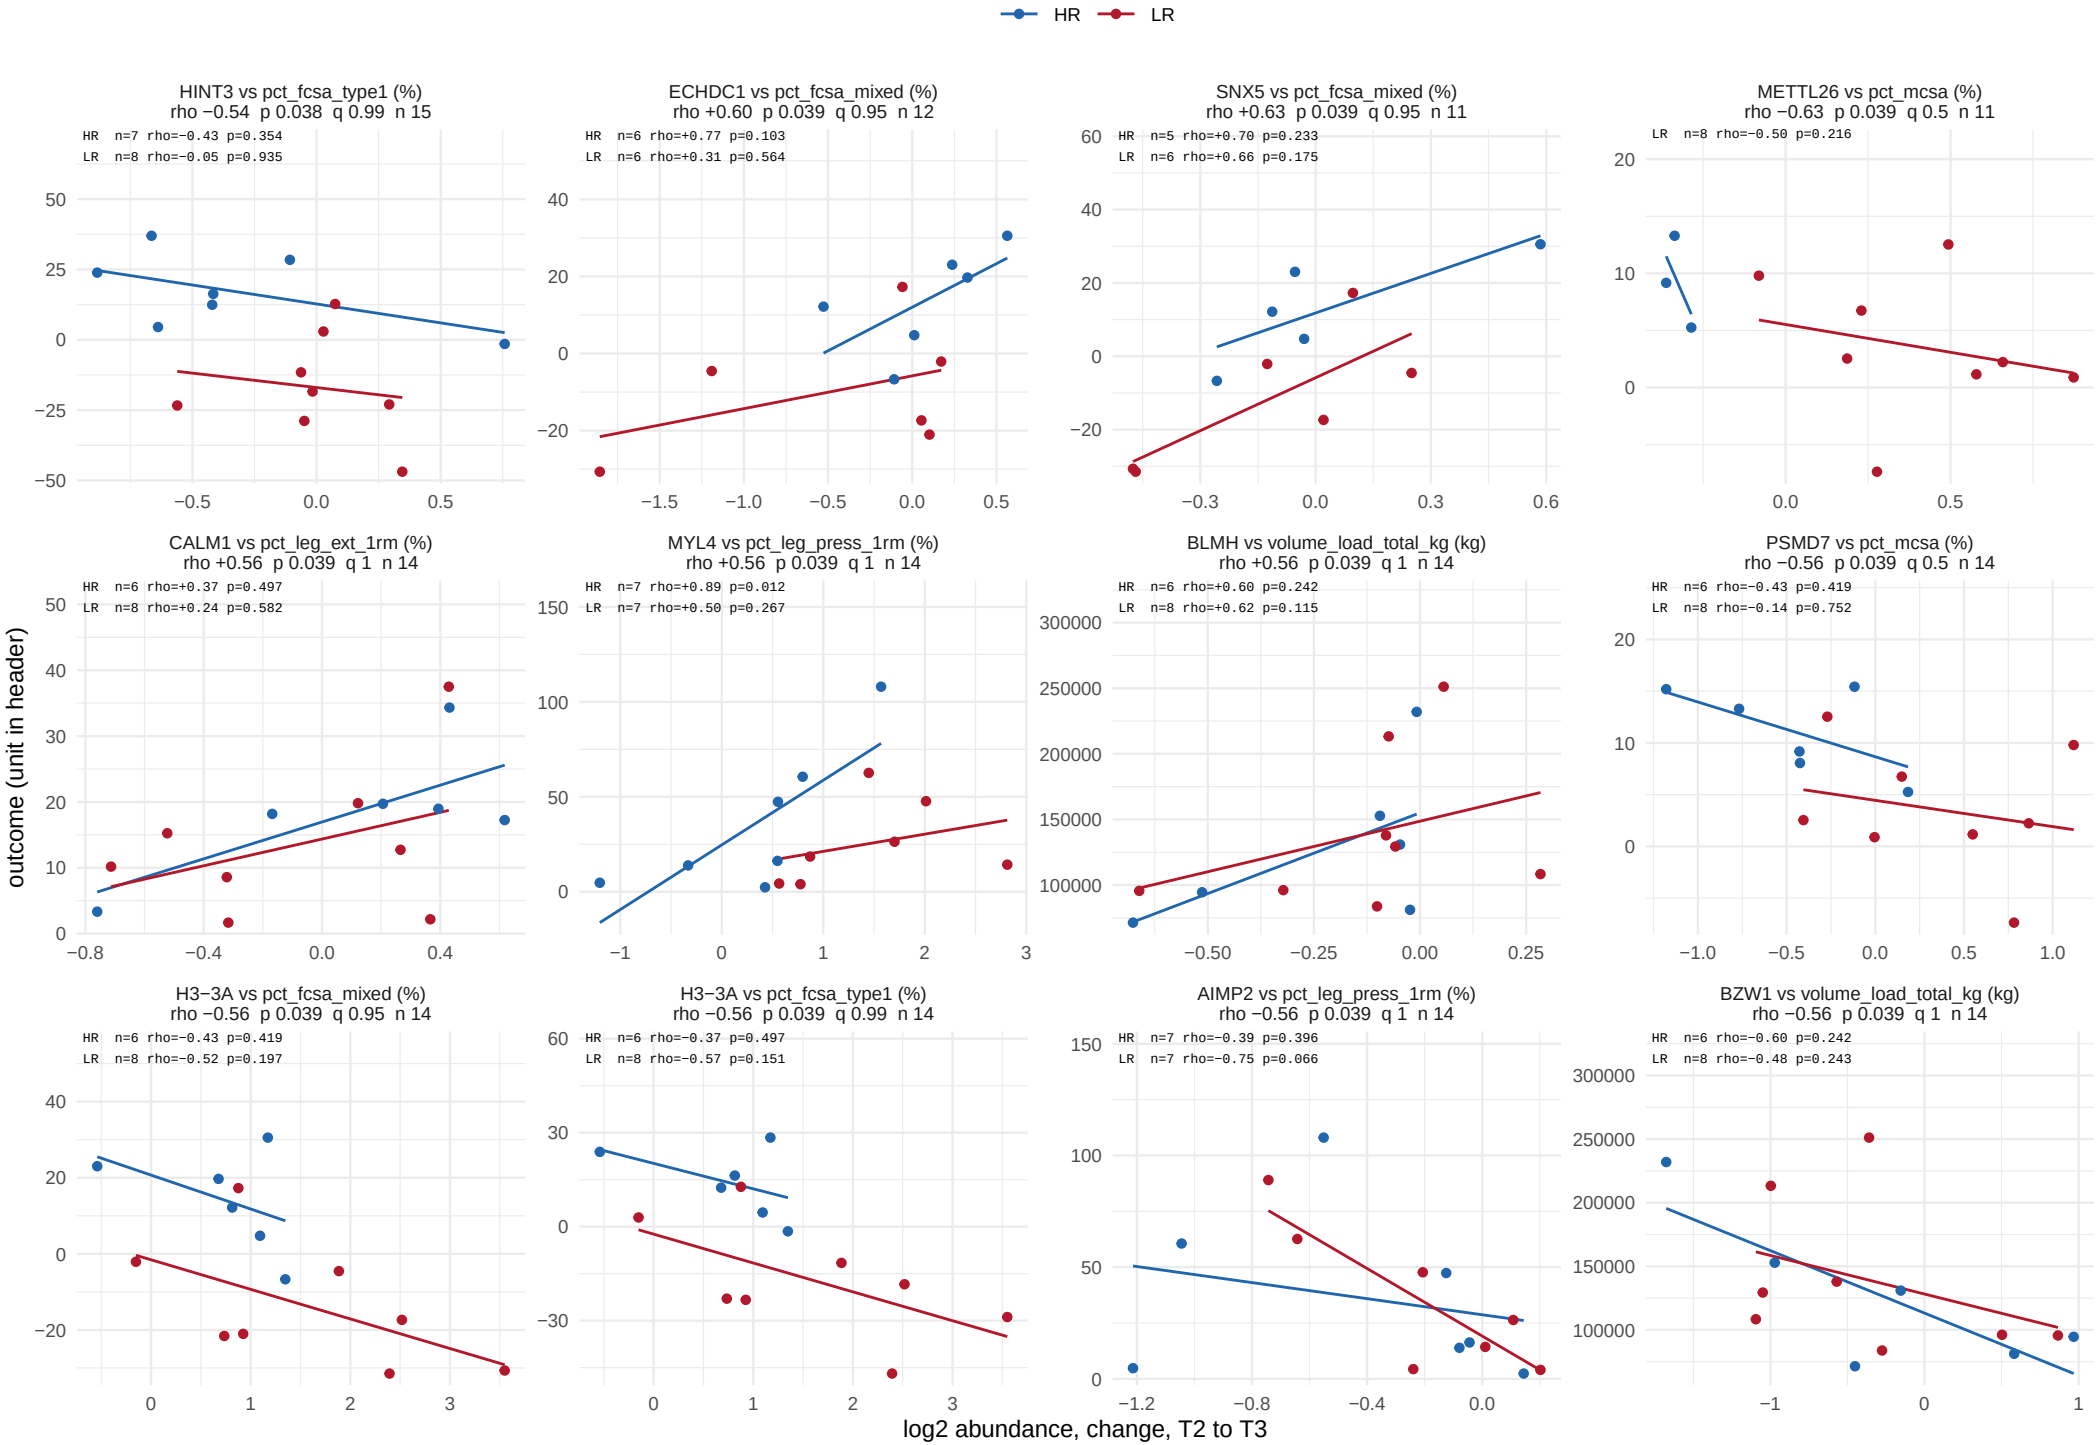

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


610 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 41 of 51.

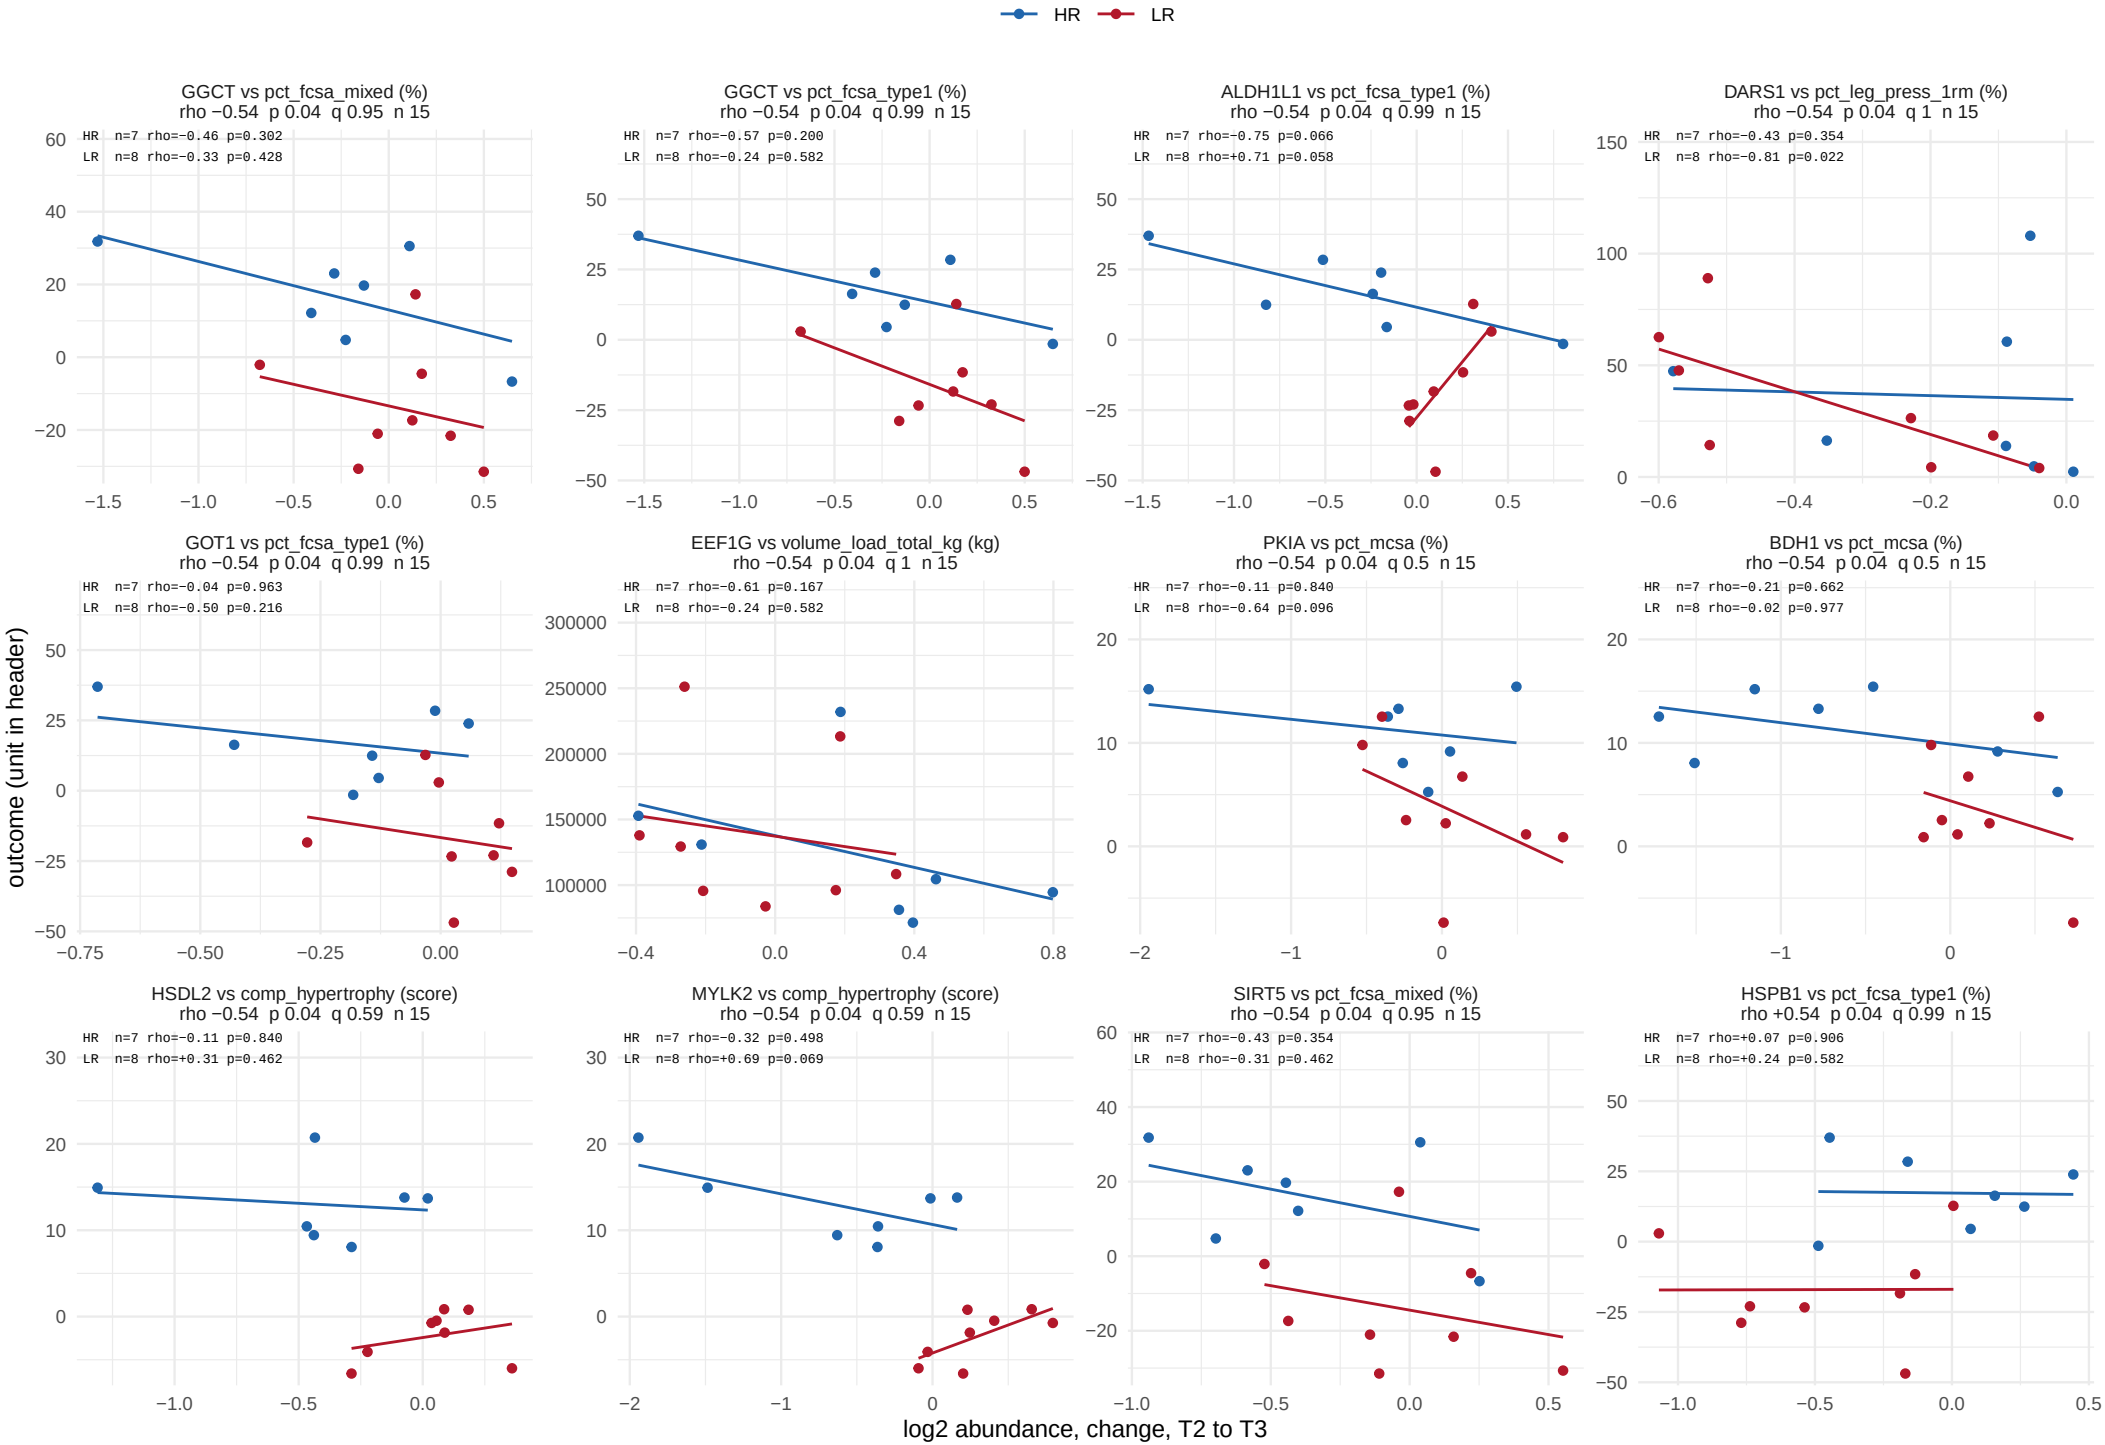

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


610 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 42 of 51.

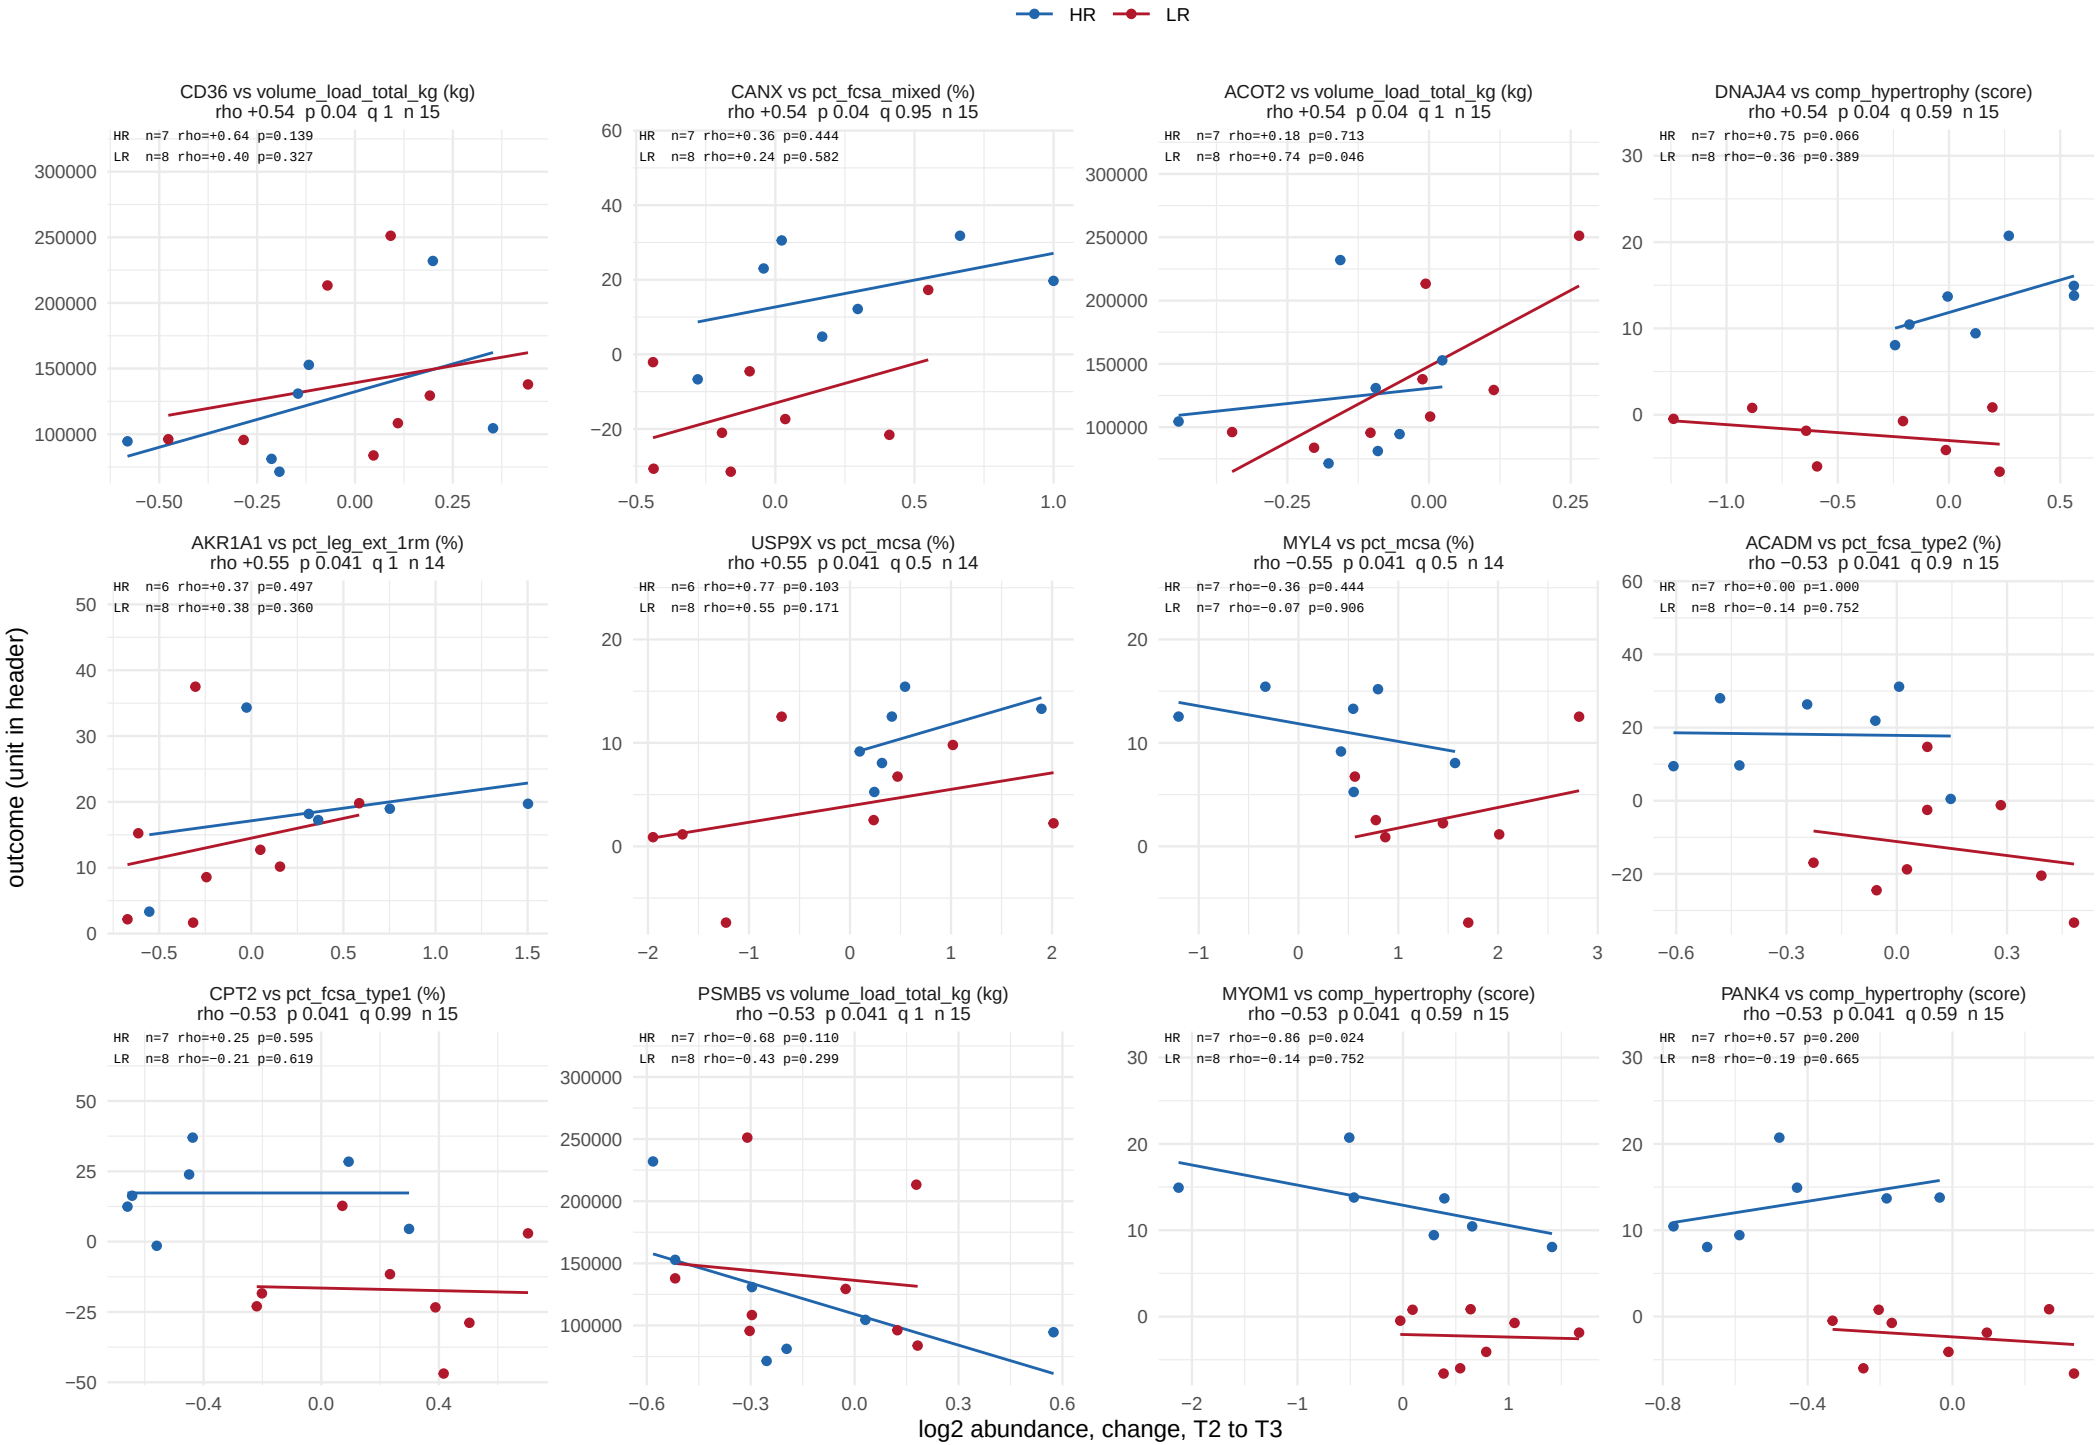

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


610 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 43 of 51.

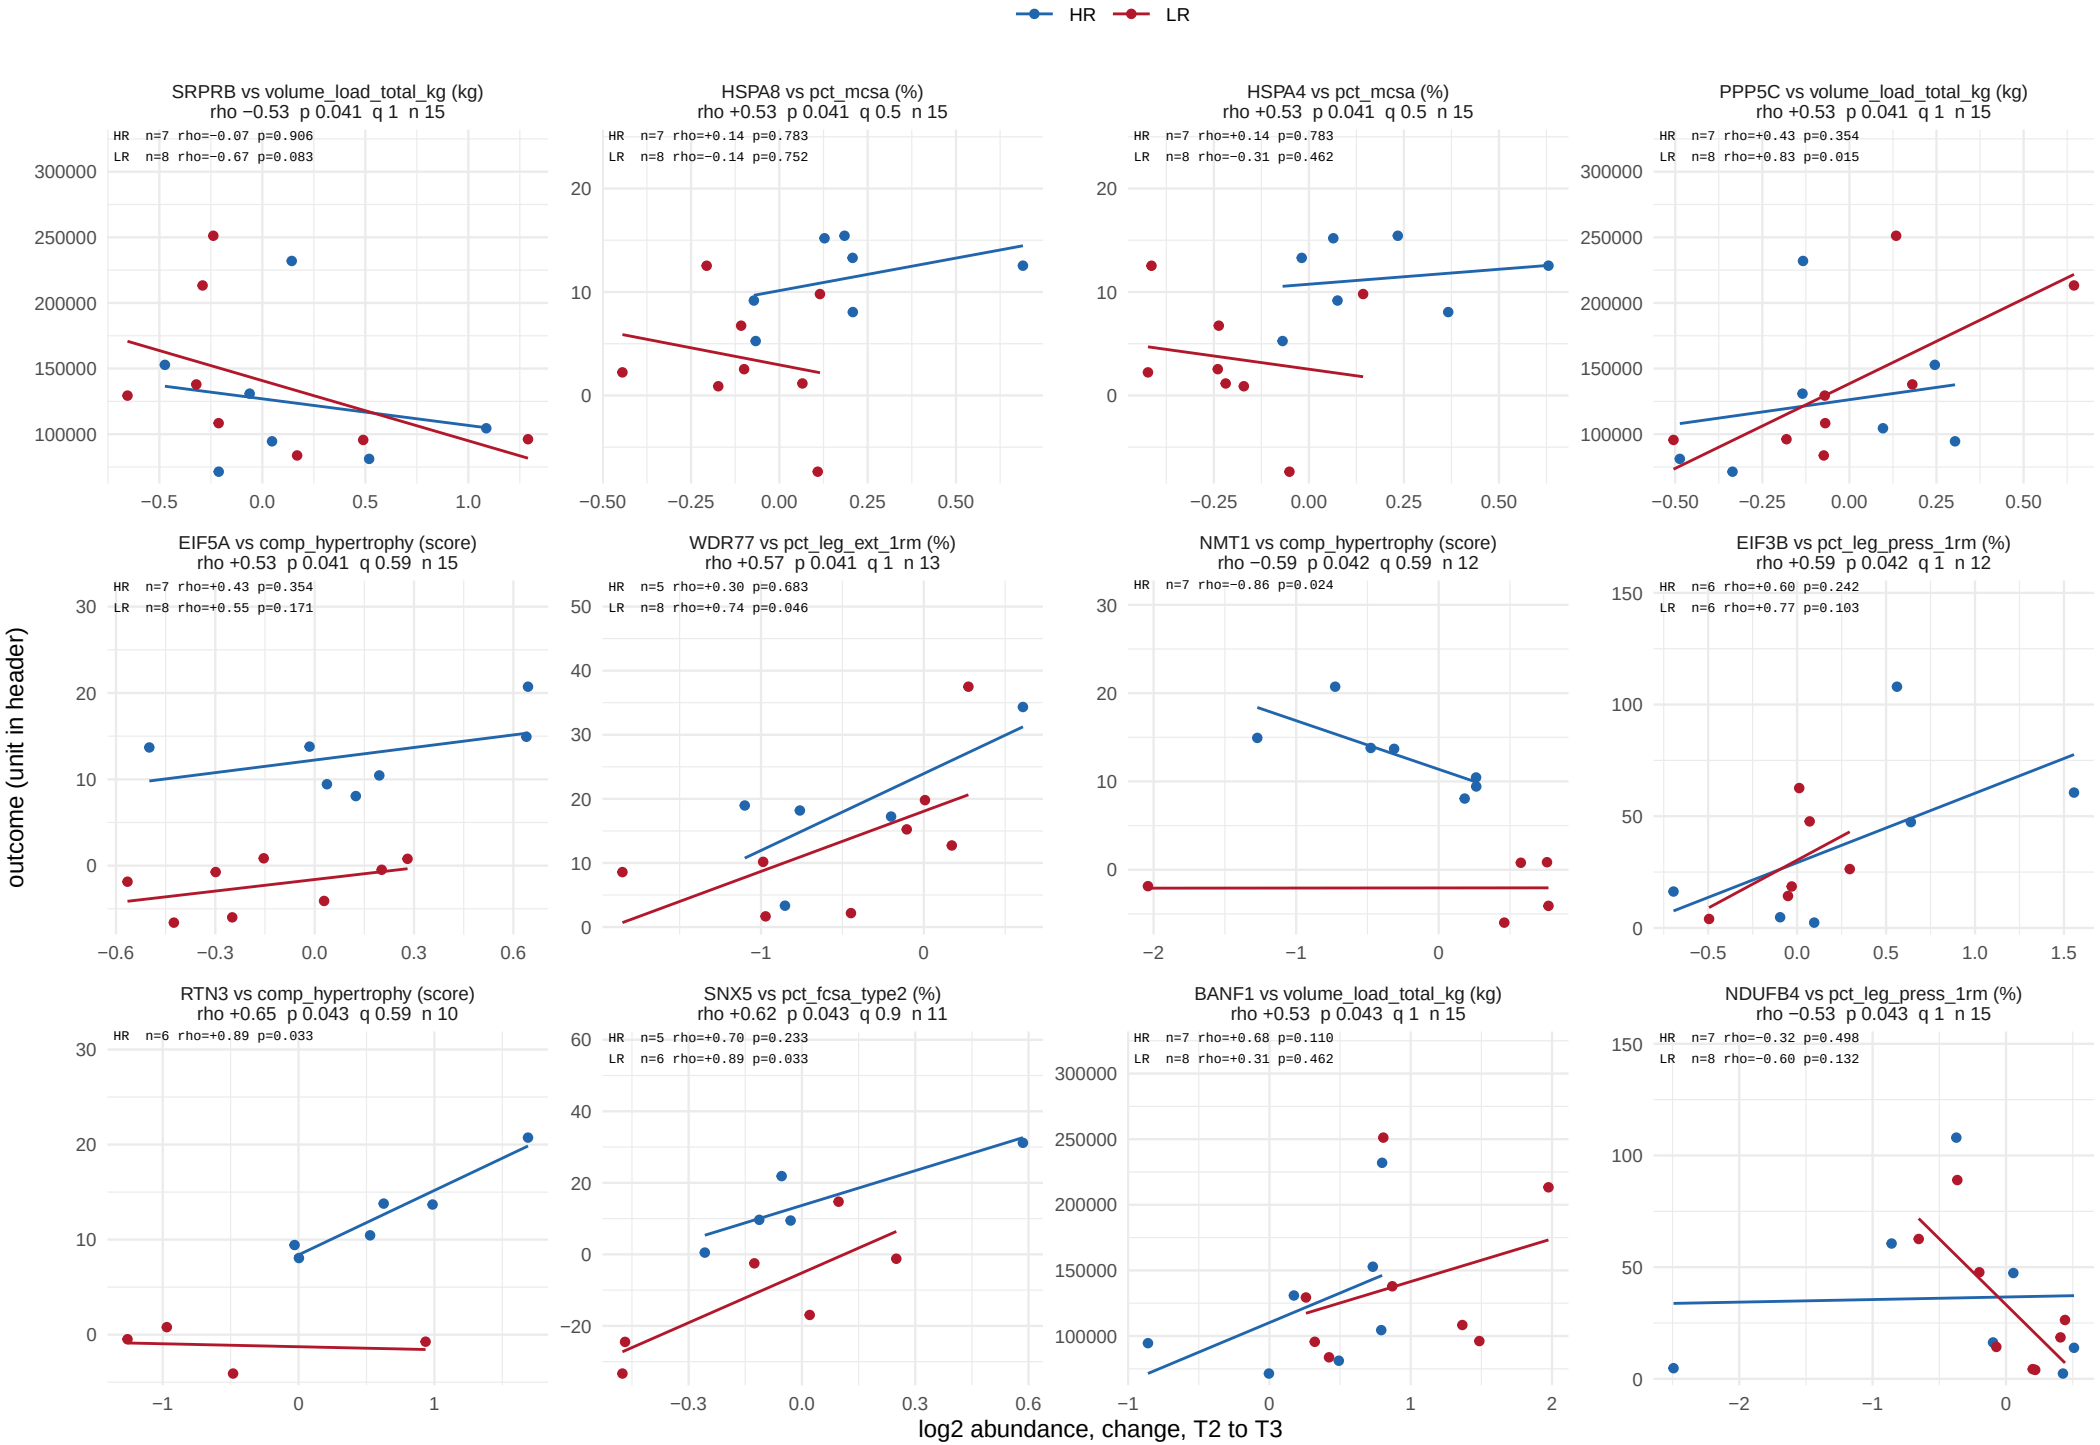

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


610 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 44 of 51.

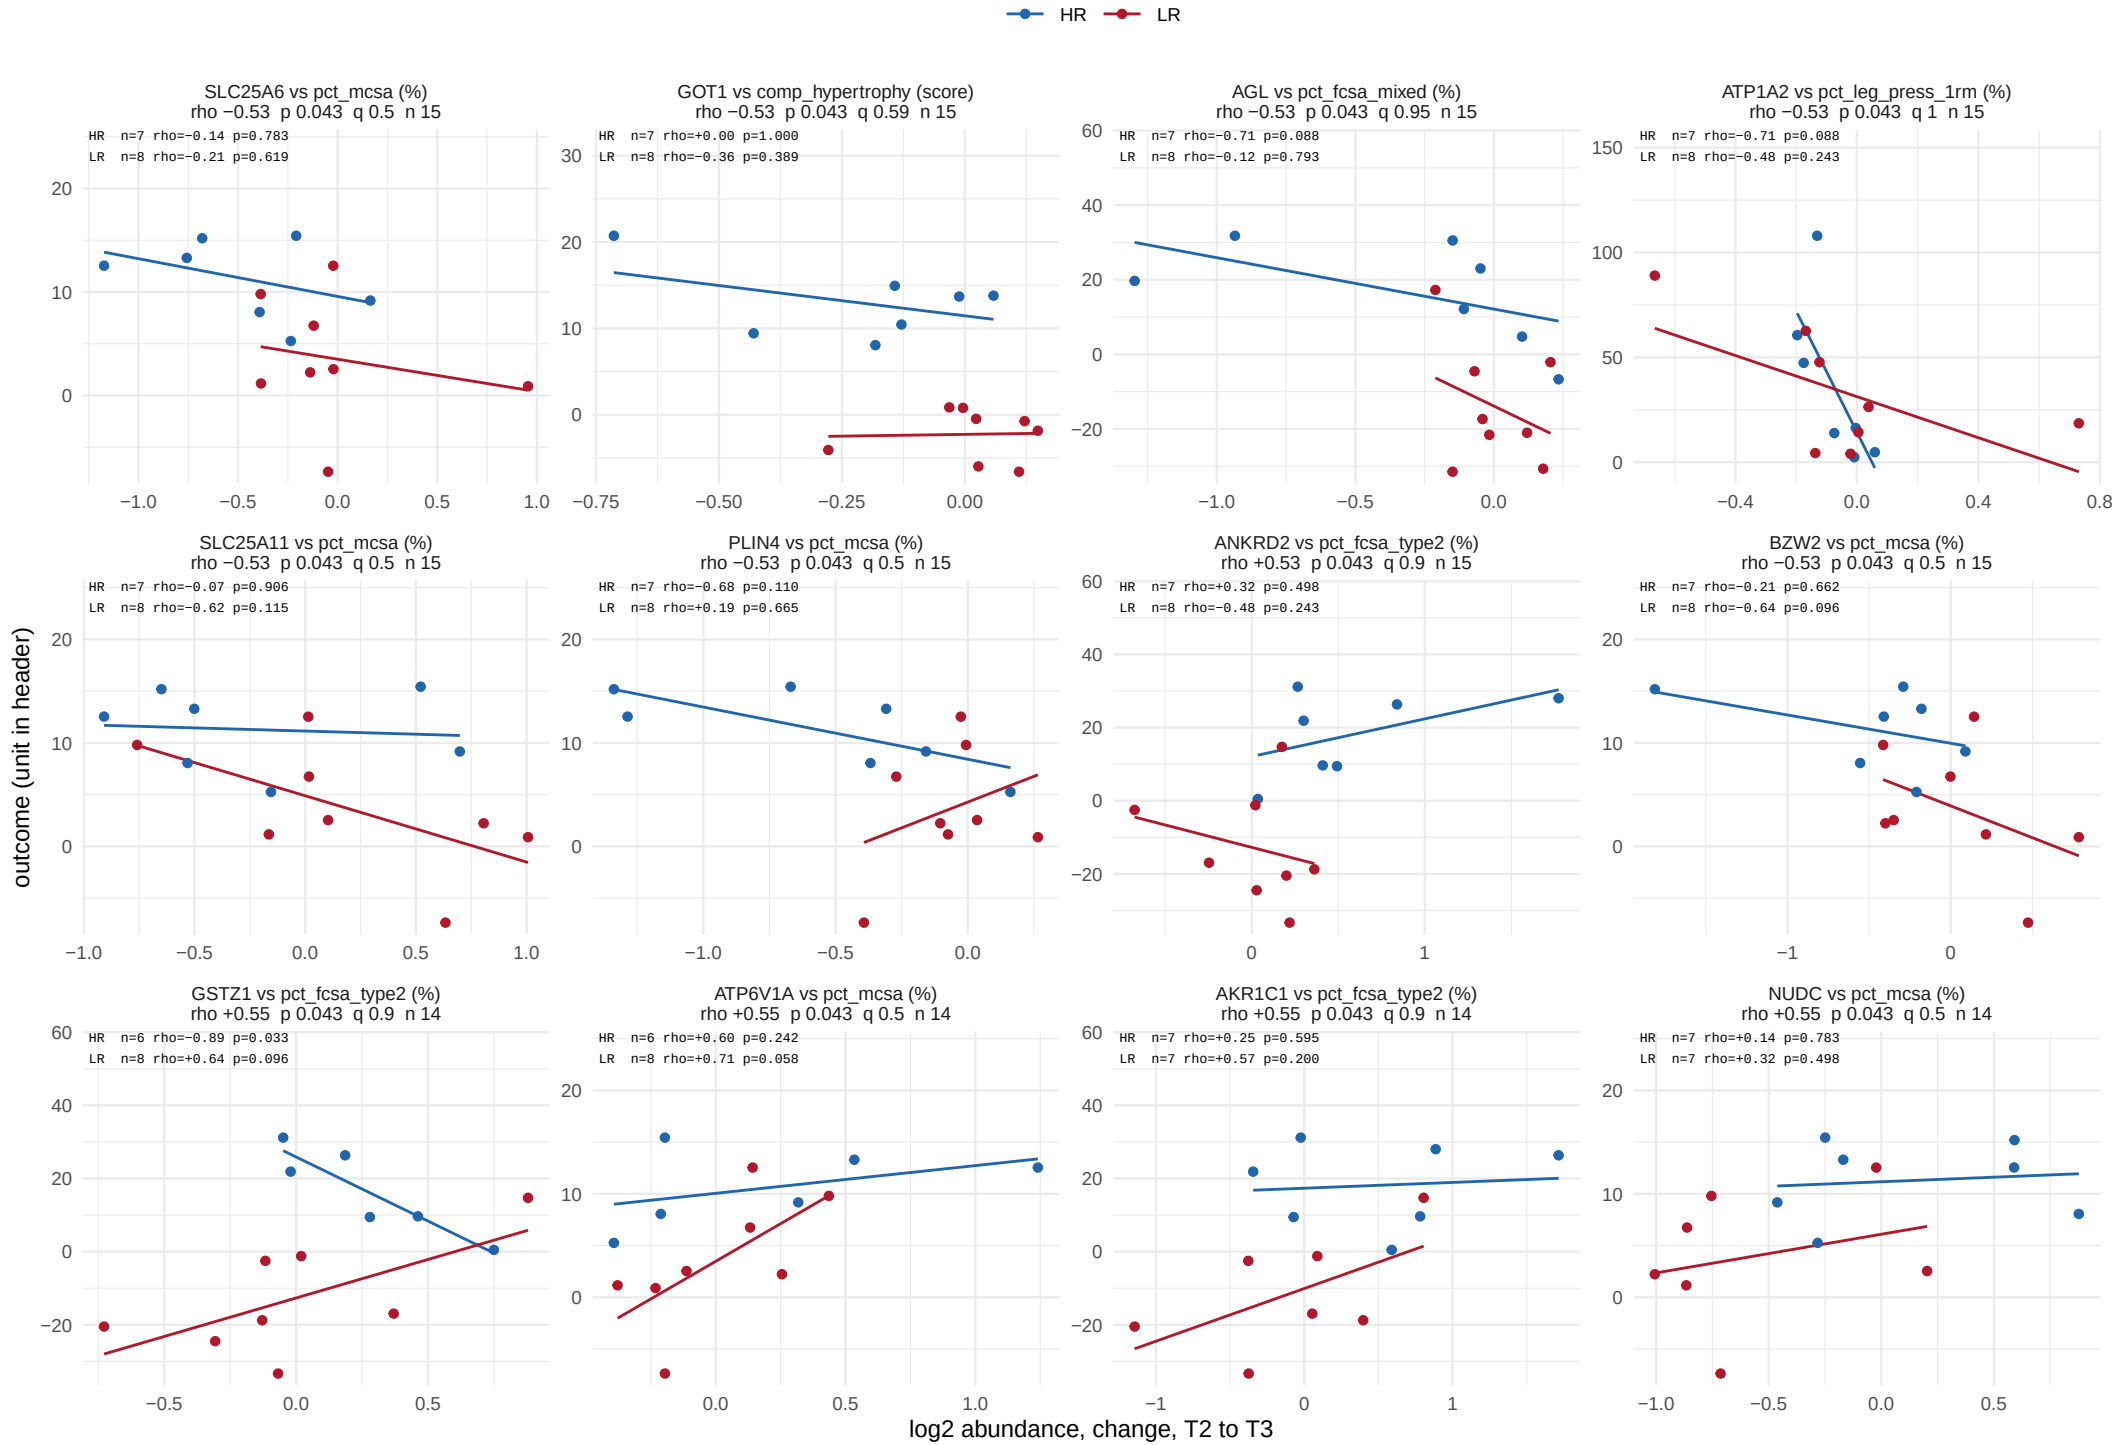

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


610 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 45 of 51.

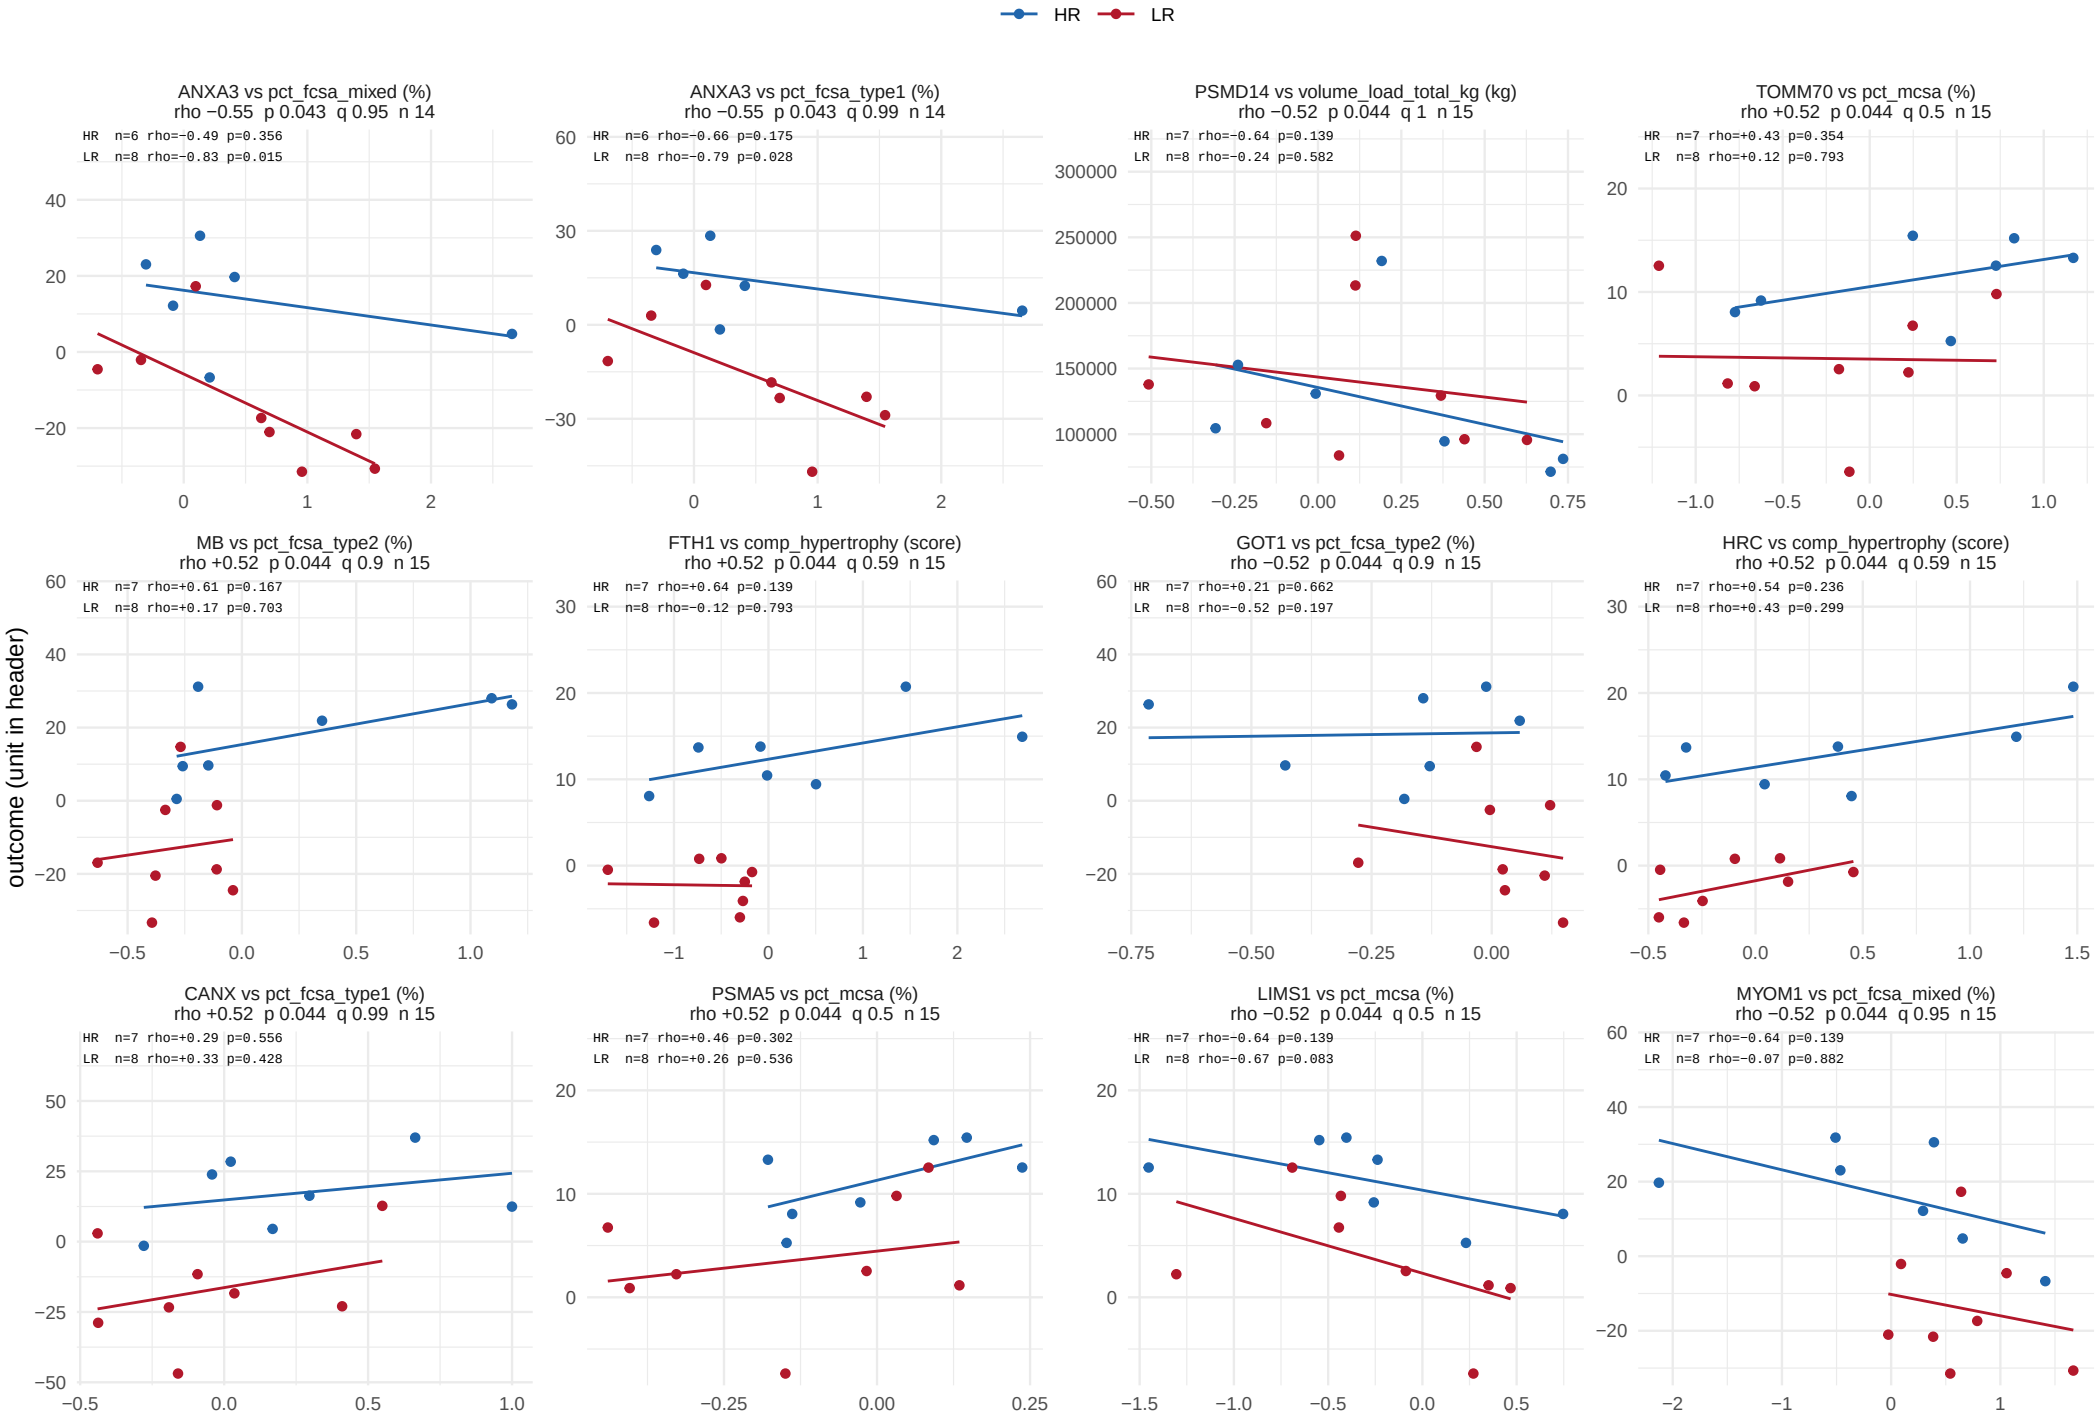

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


610 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 46 of 51.

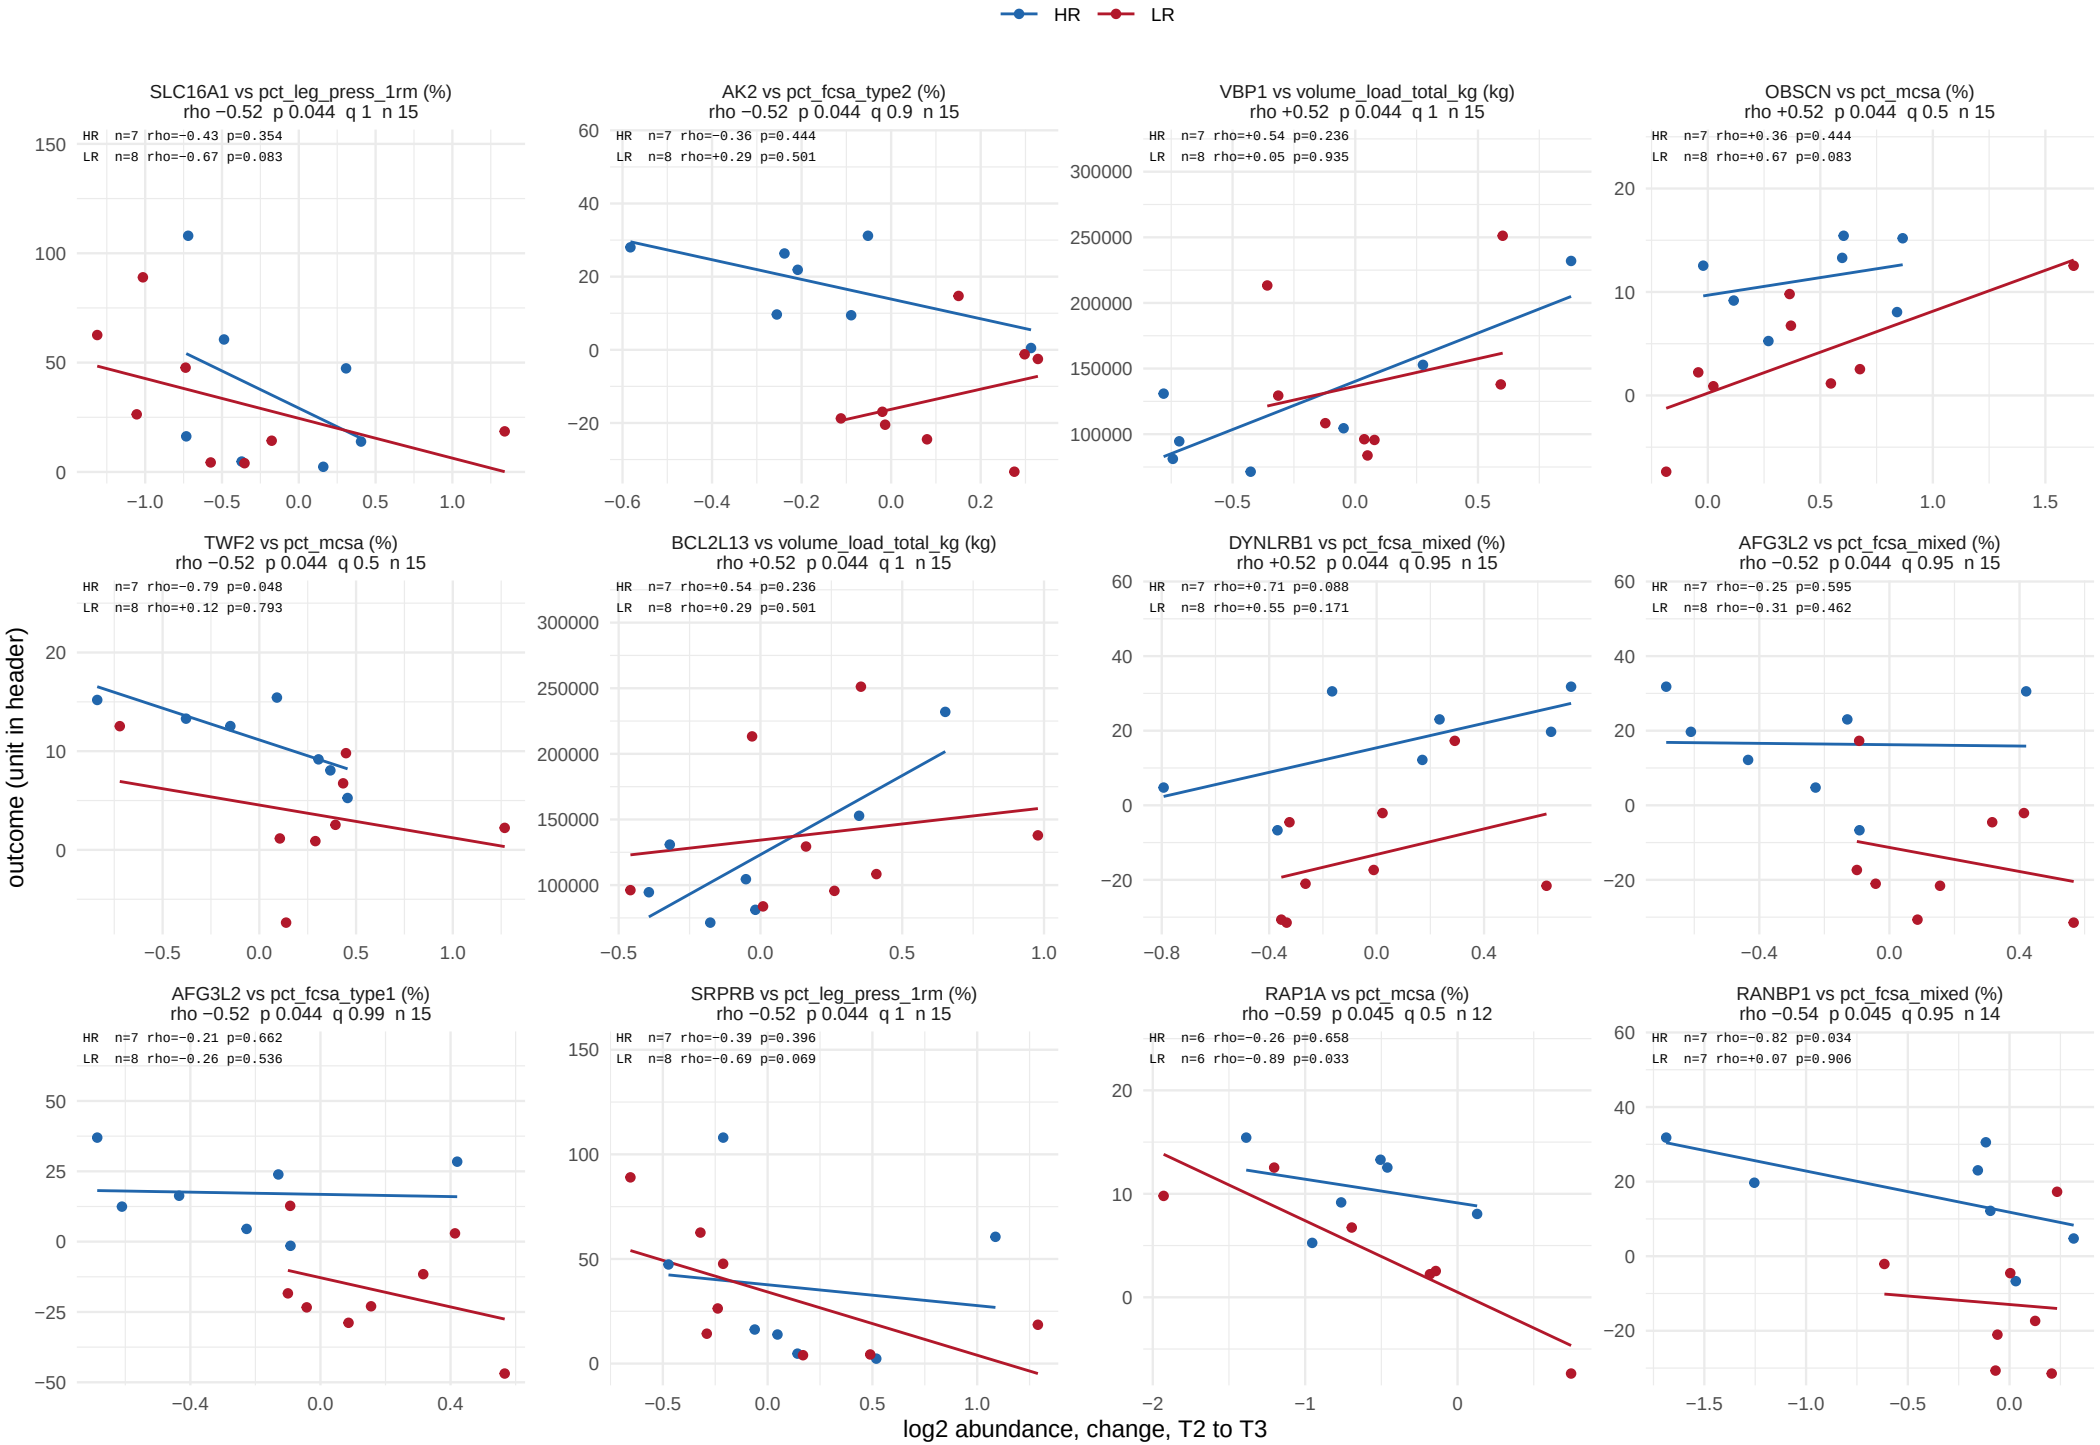

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


610 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 47 of 51.

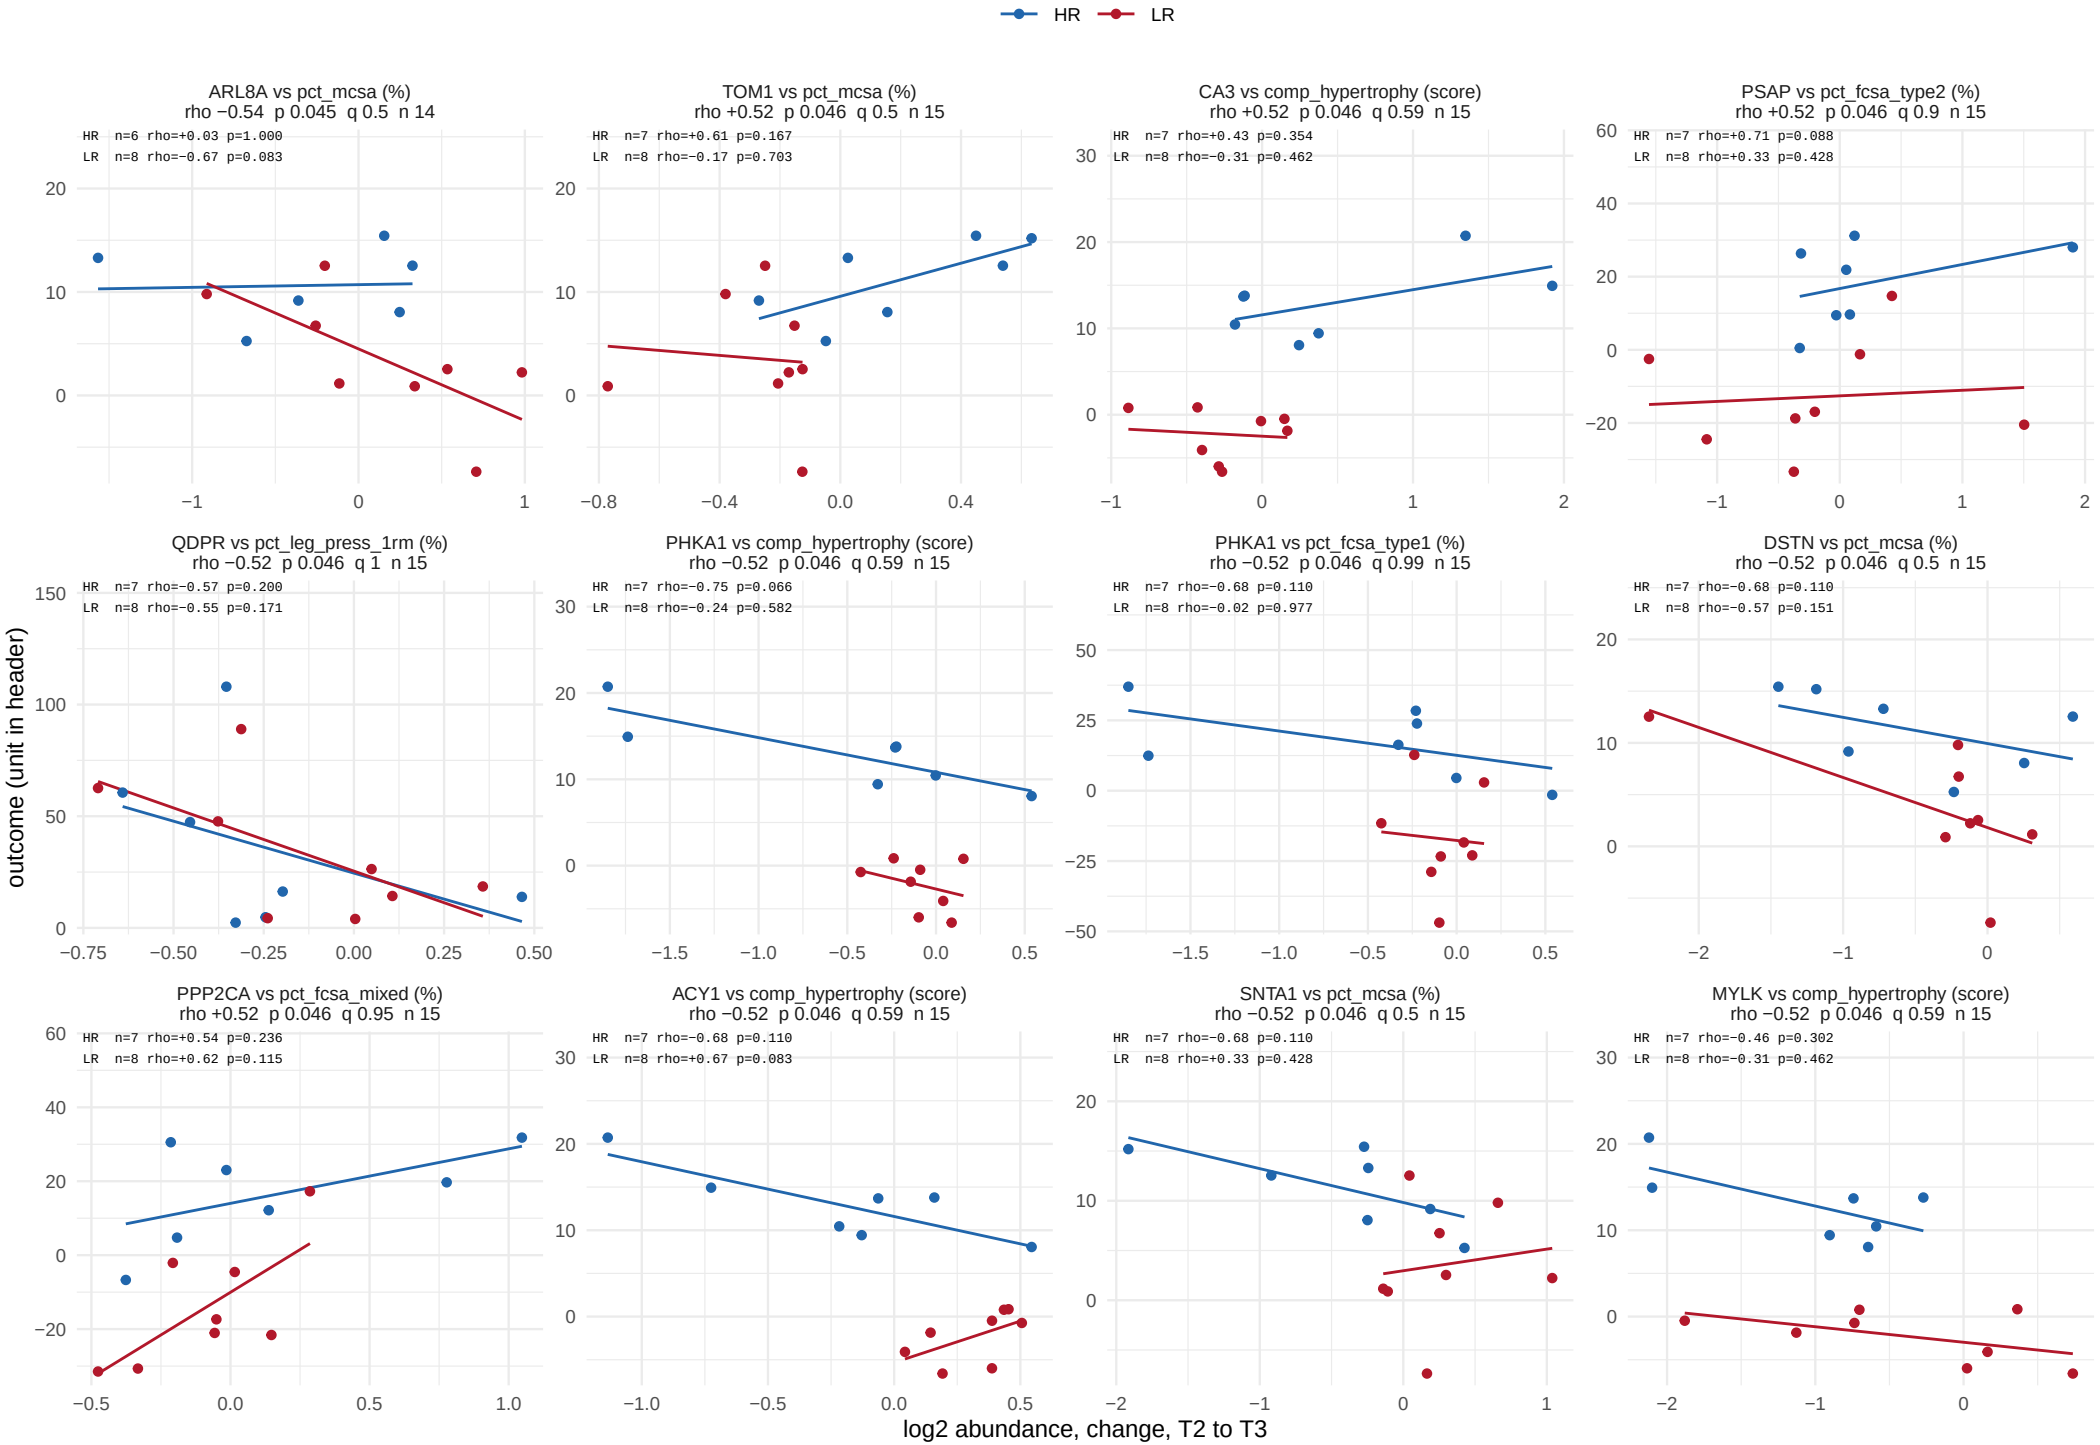

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


610 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 48 of 51.

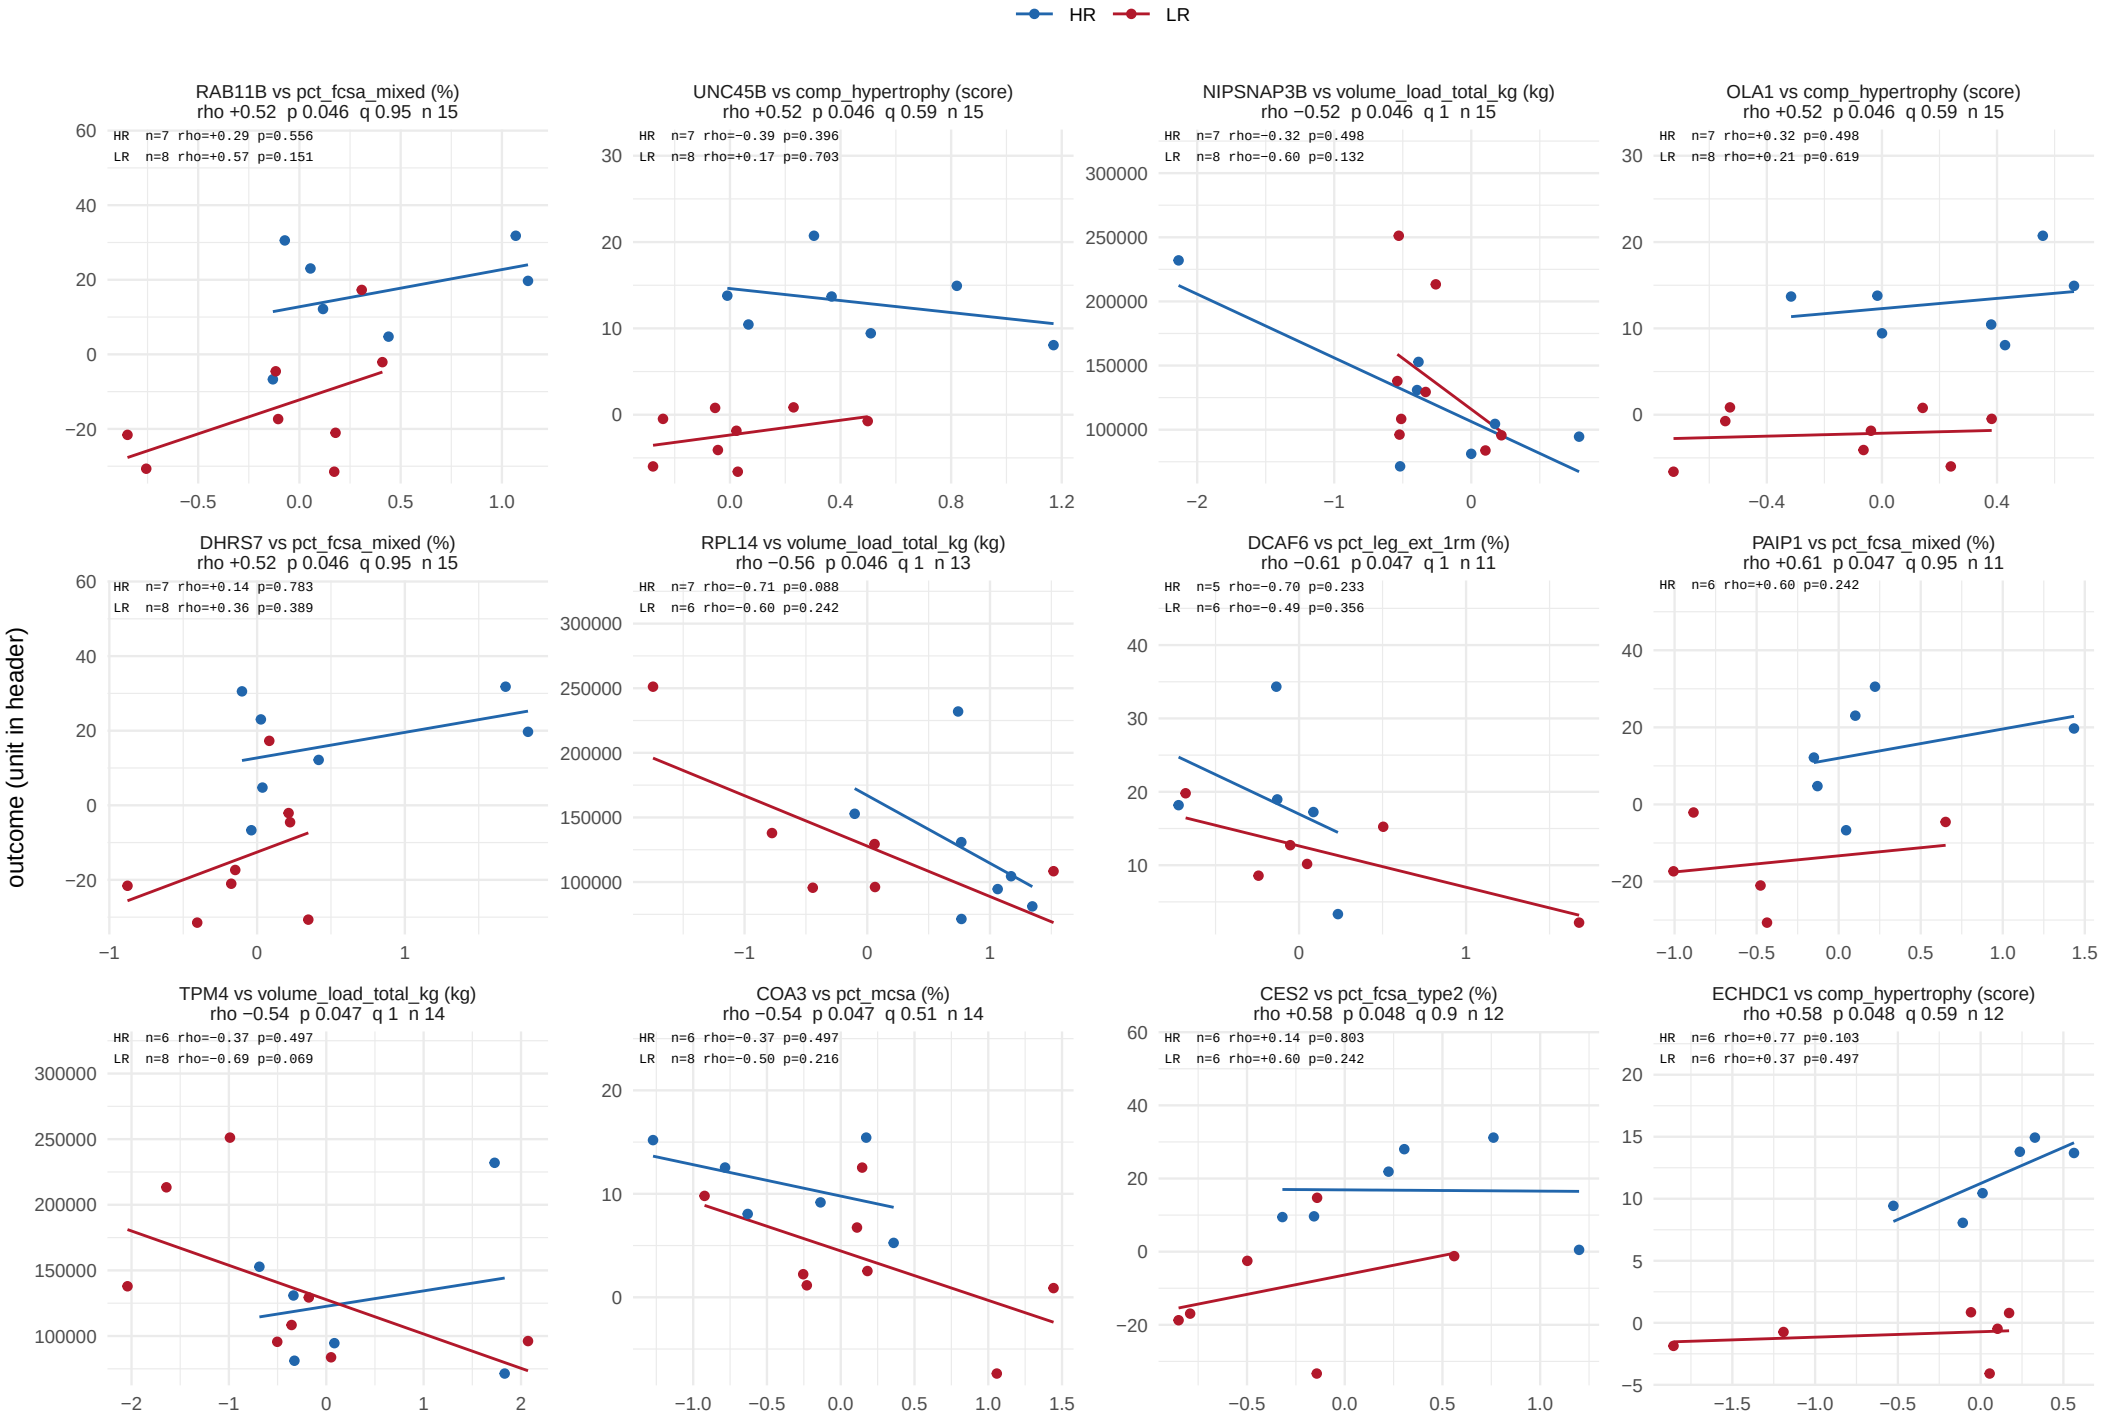

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


610 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 49 of 51.

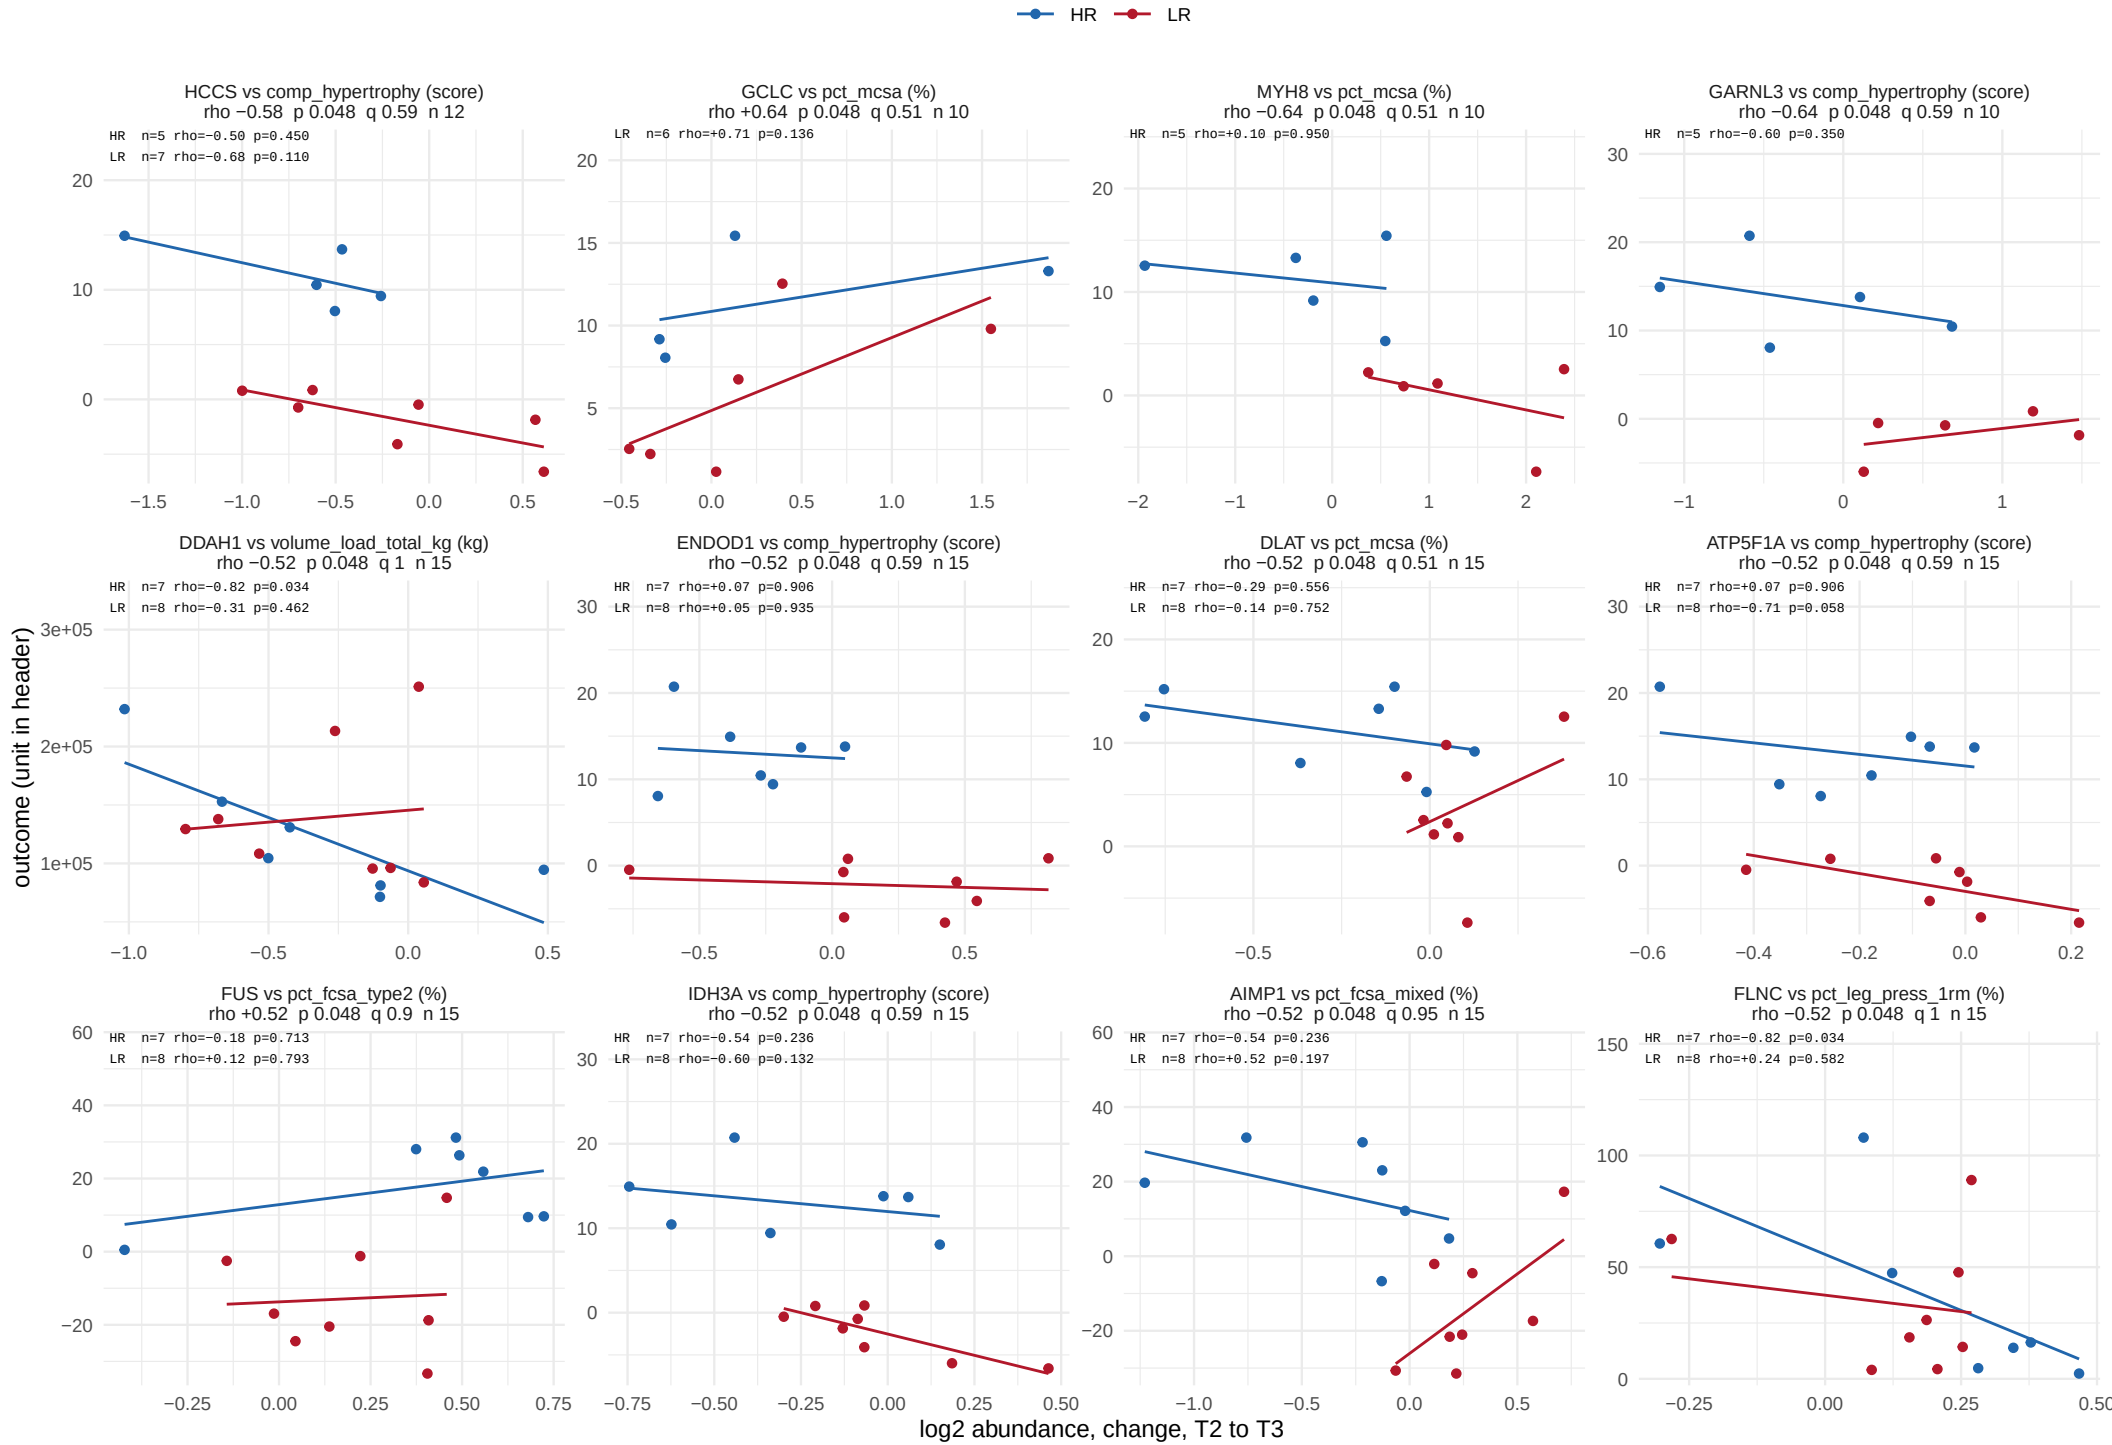

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


610 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 50 of 51.

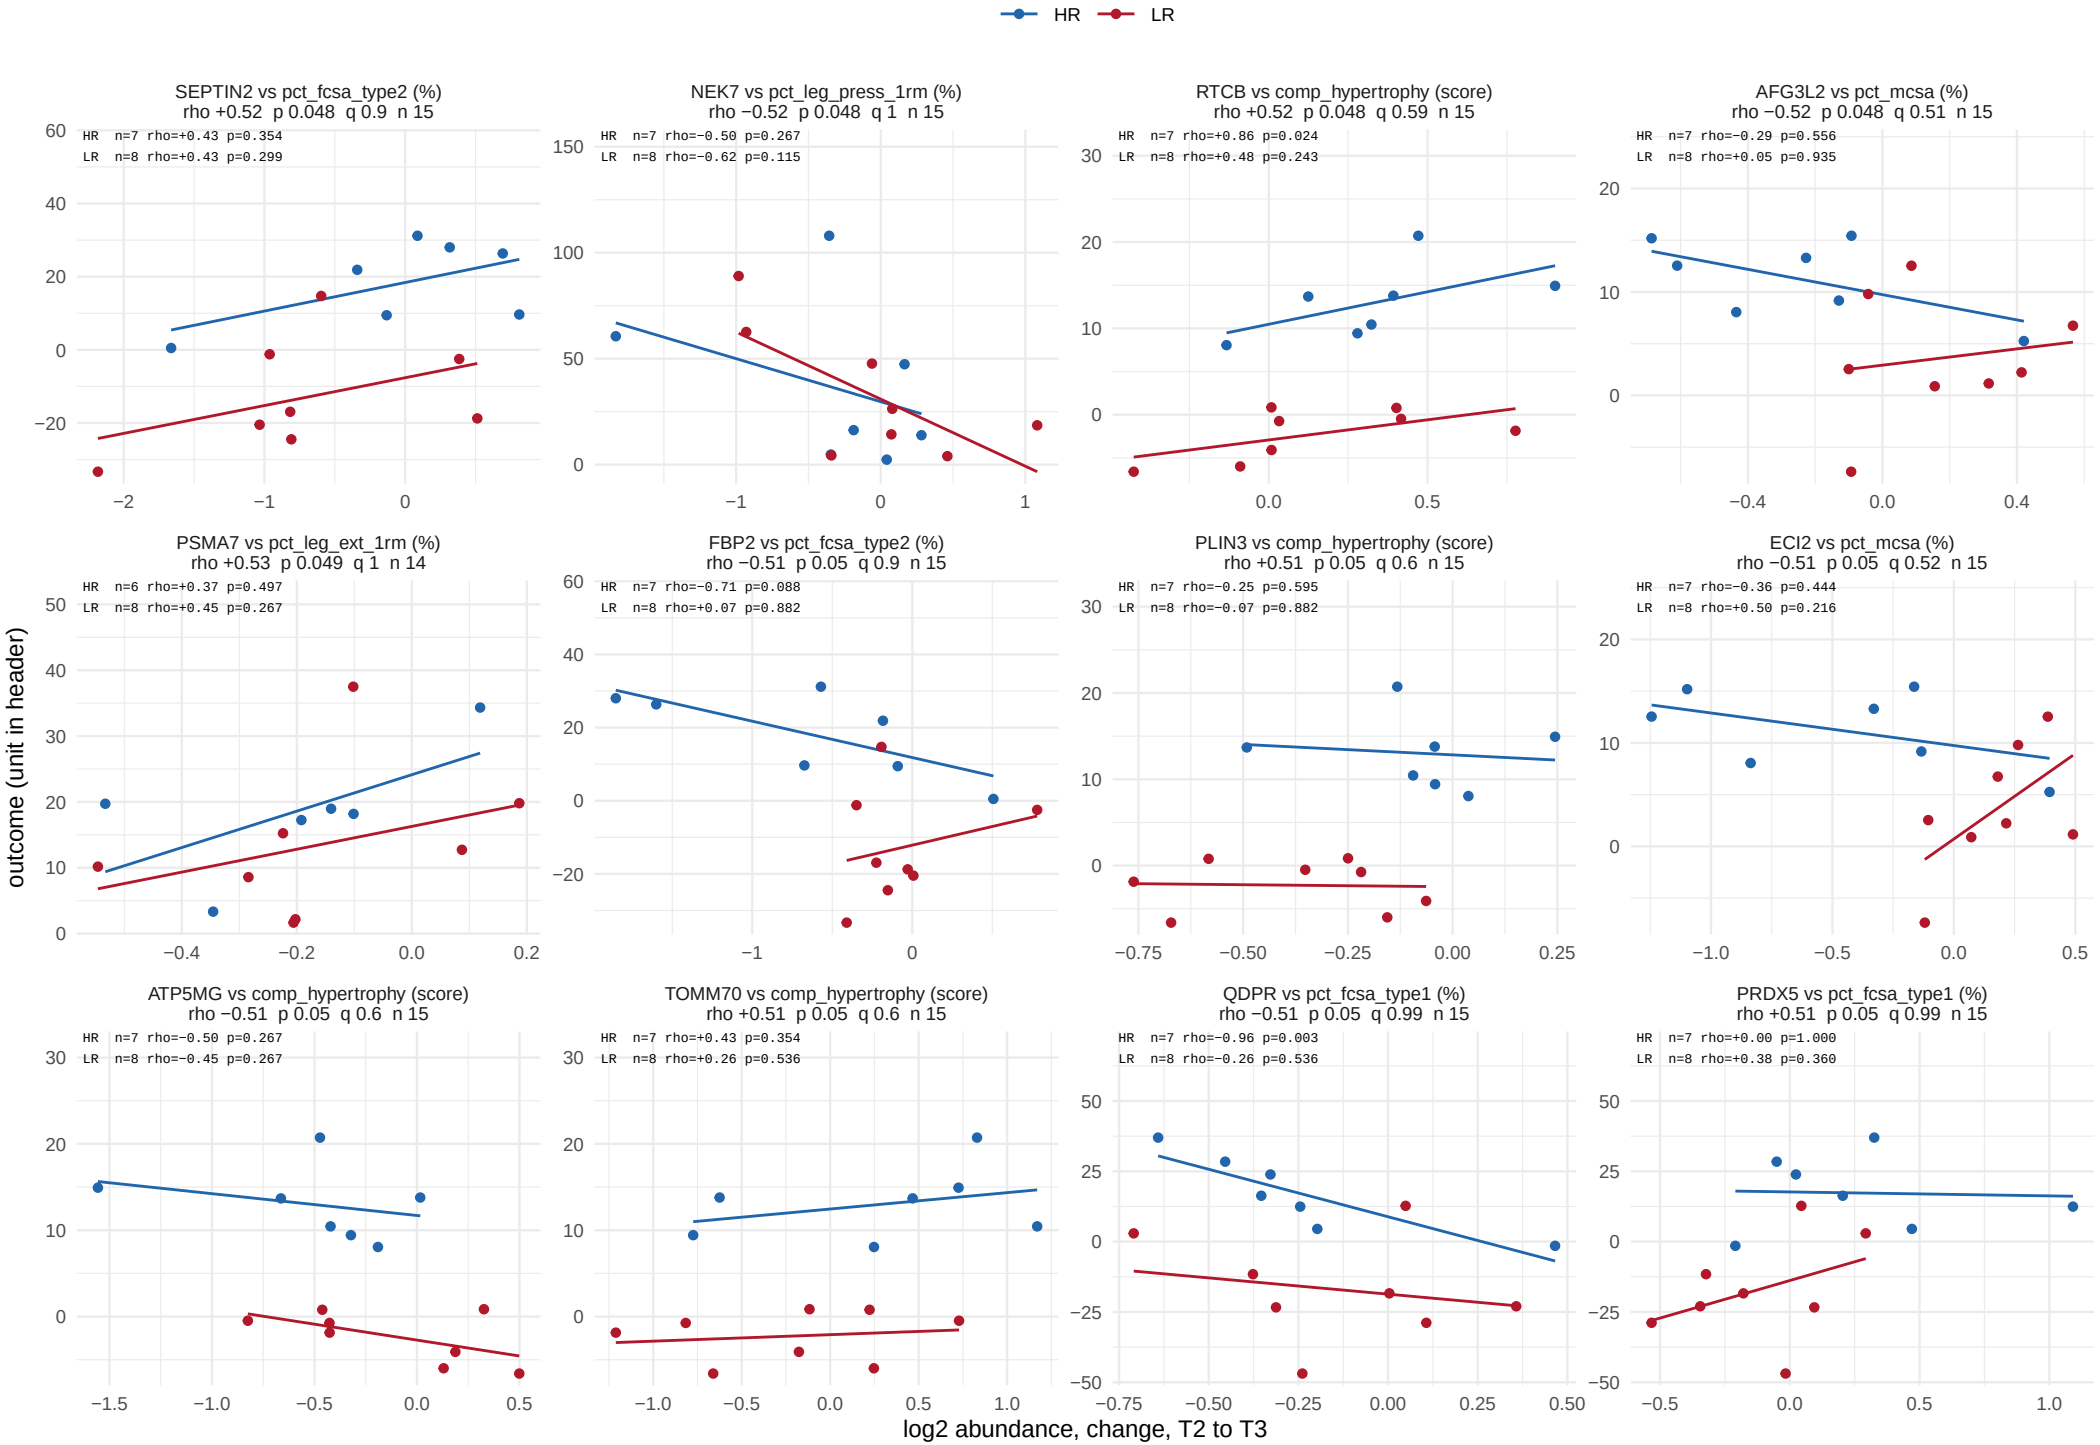

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


610 of 11747 feature−outcome pairs at p < 0.05, 2 at BH < 0.05. Page 51 of 51.

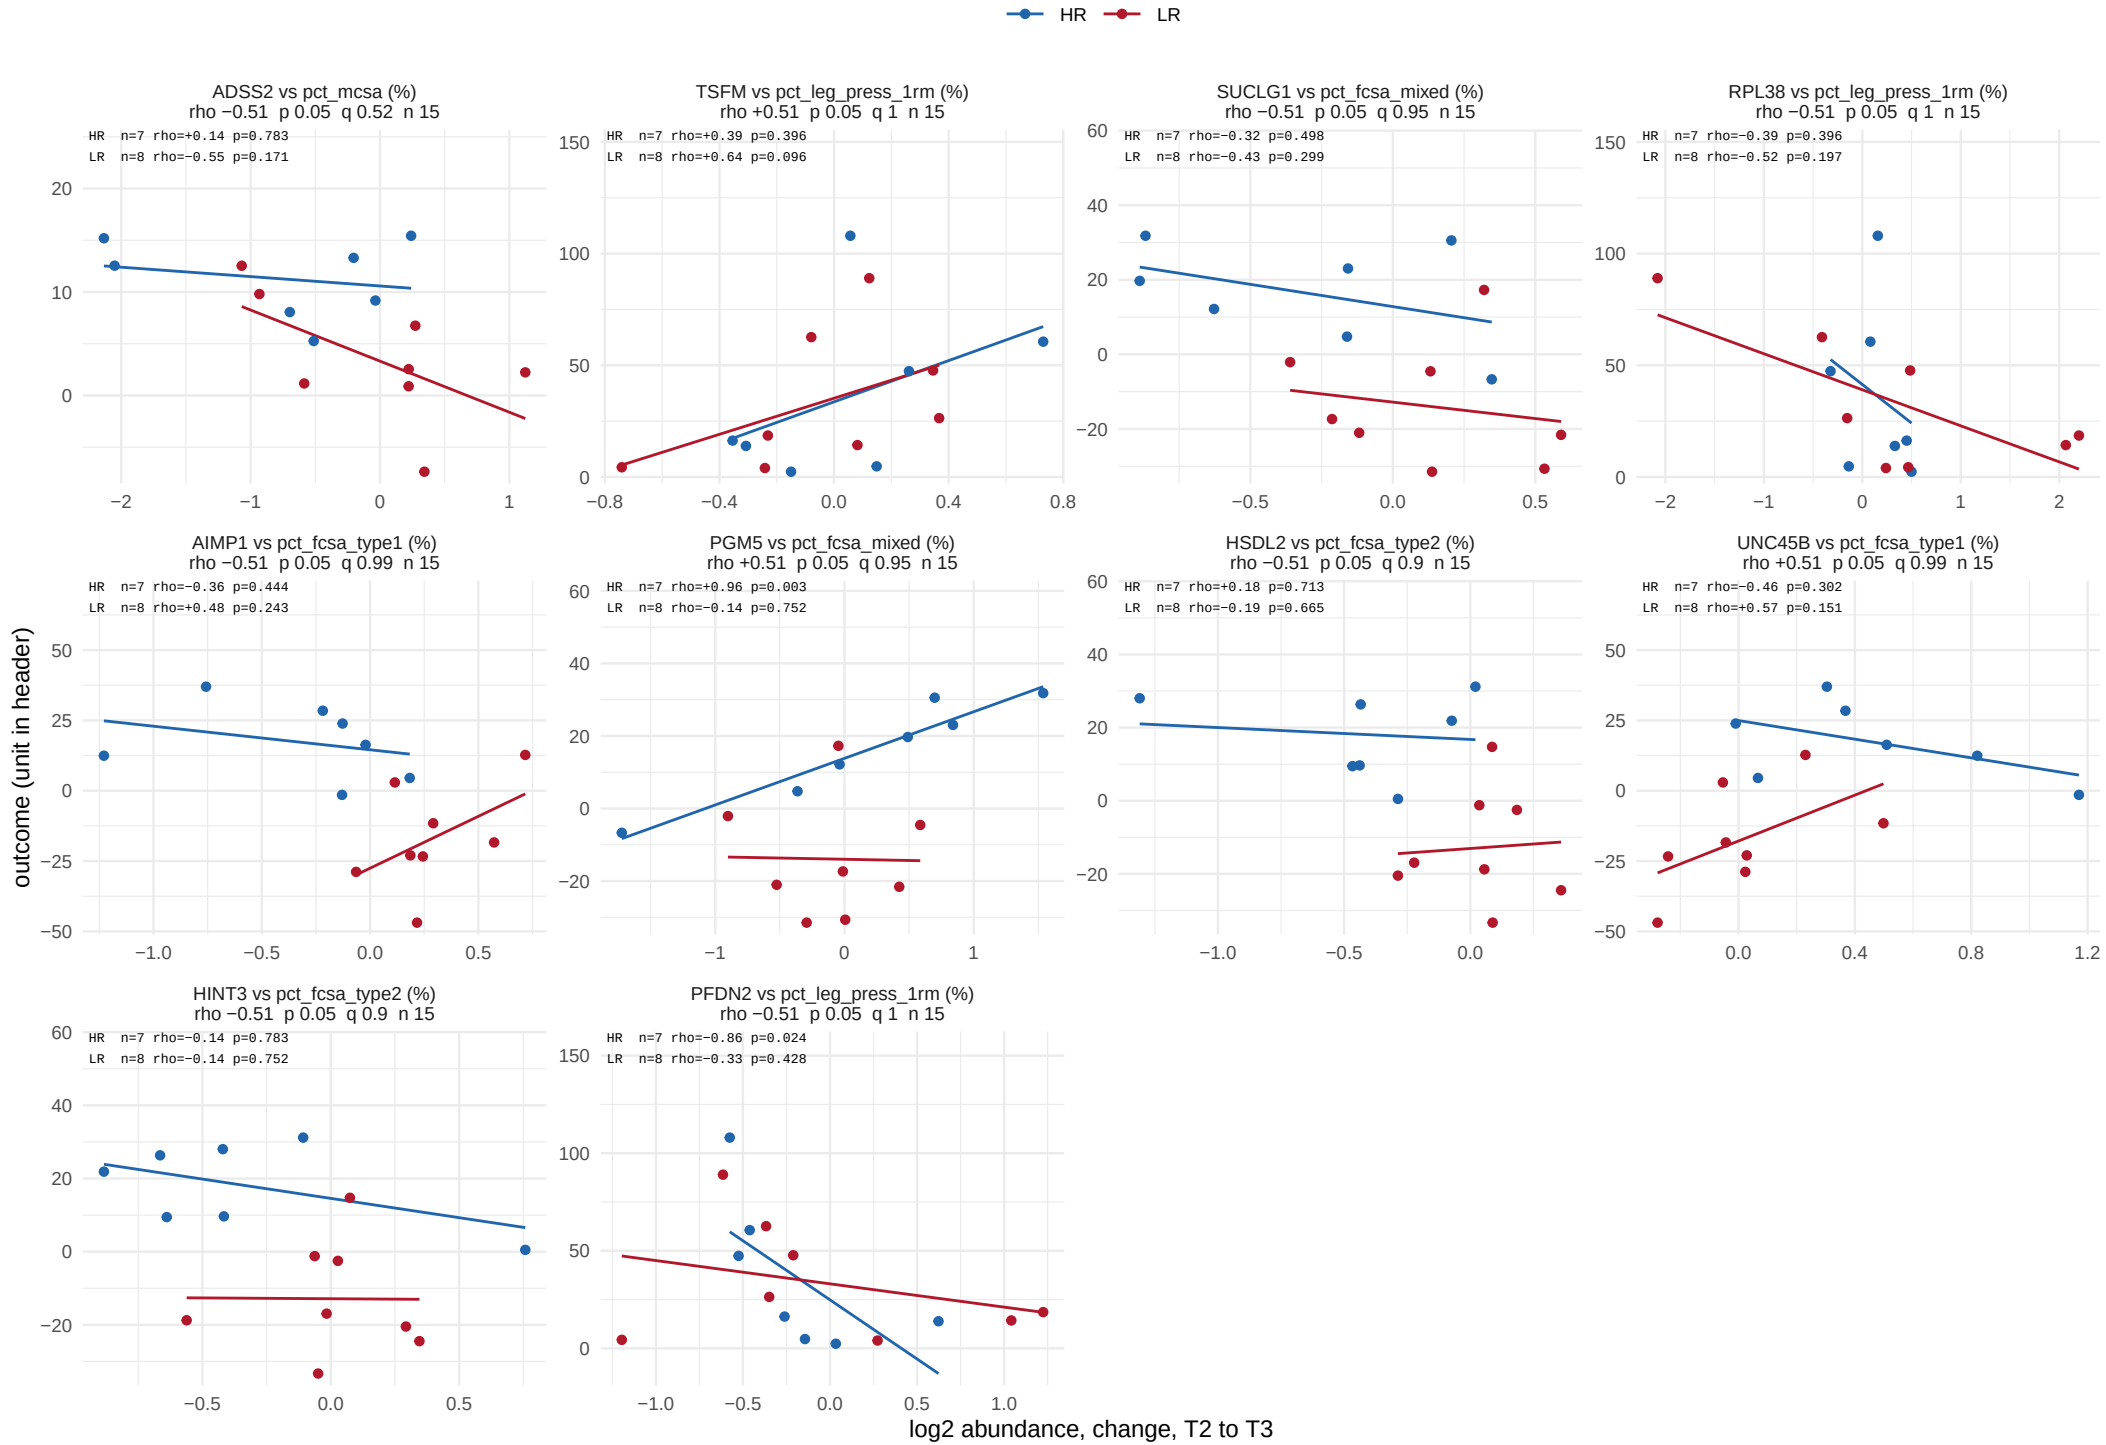

One point per subject. Lines are a least−squares fit per arm, drawn as a guide; the tests are Spearman. Header: rho and p pooled over both arms, BH q within window, outcome, and the subjects used. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Arm difference, training window


444 of 8450 feature−outcome pairs at p < 0.05, 20 at BH < 0.05. Page 1 of 37.

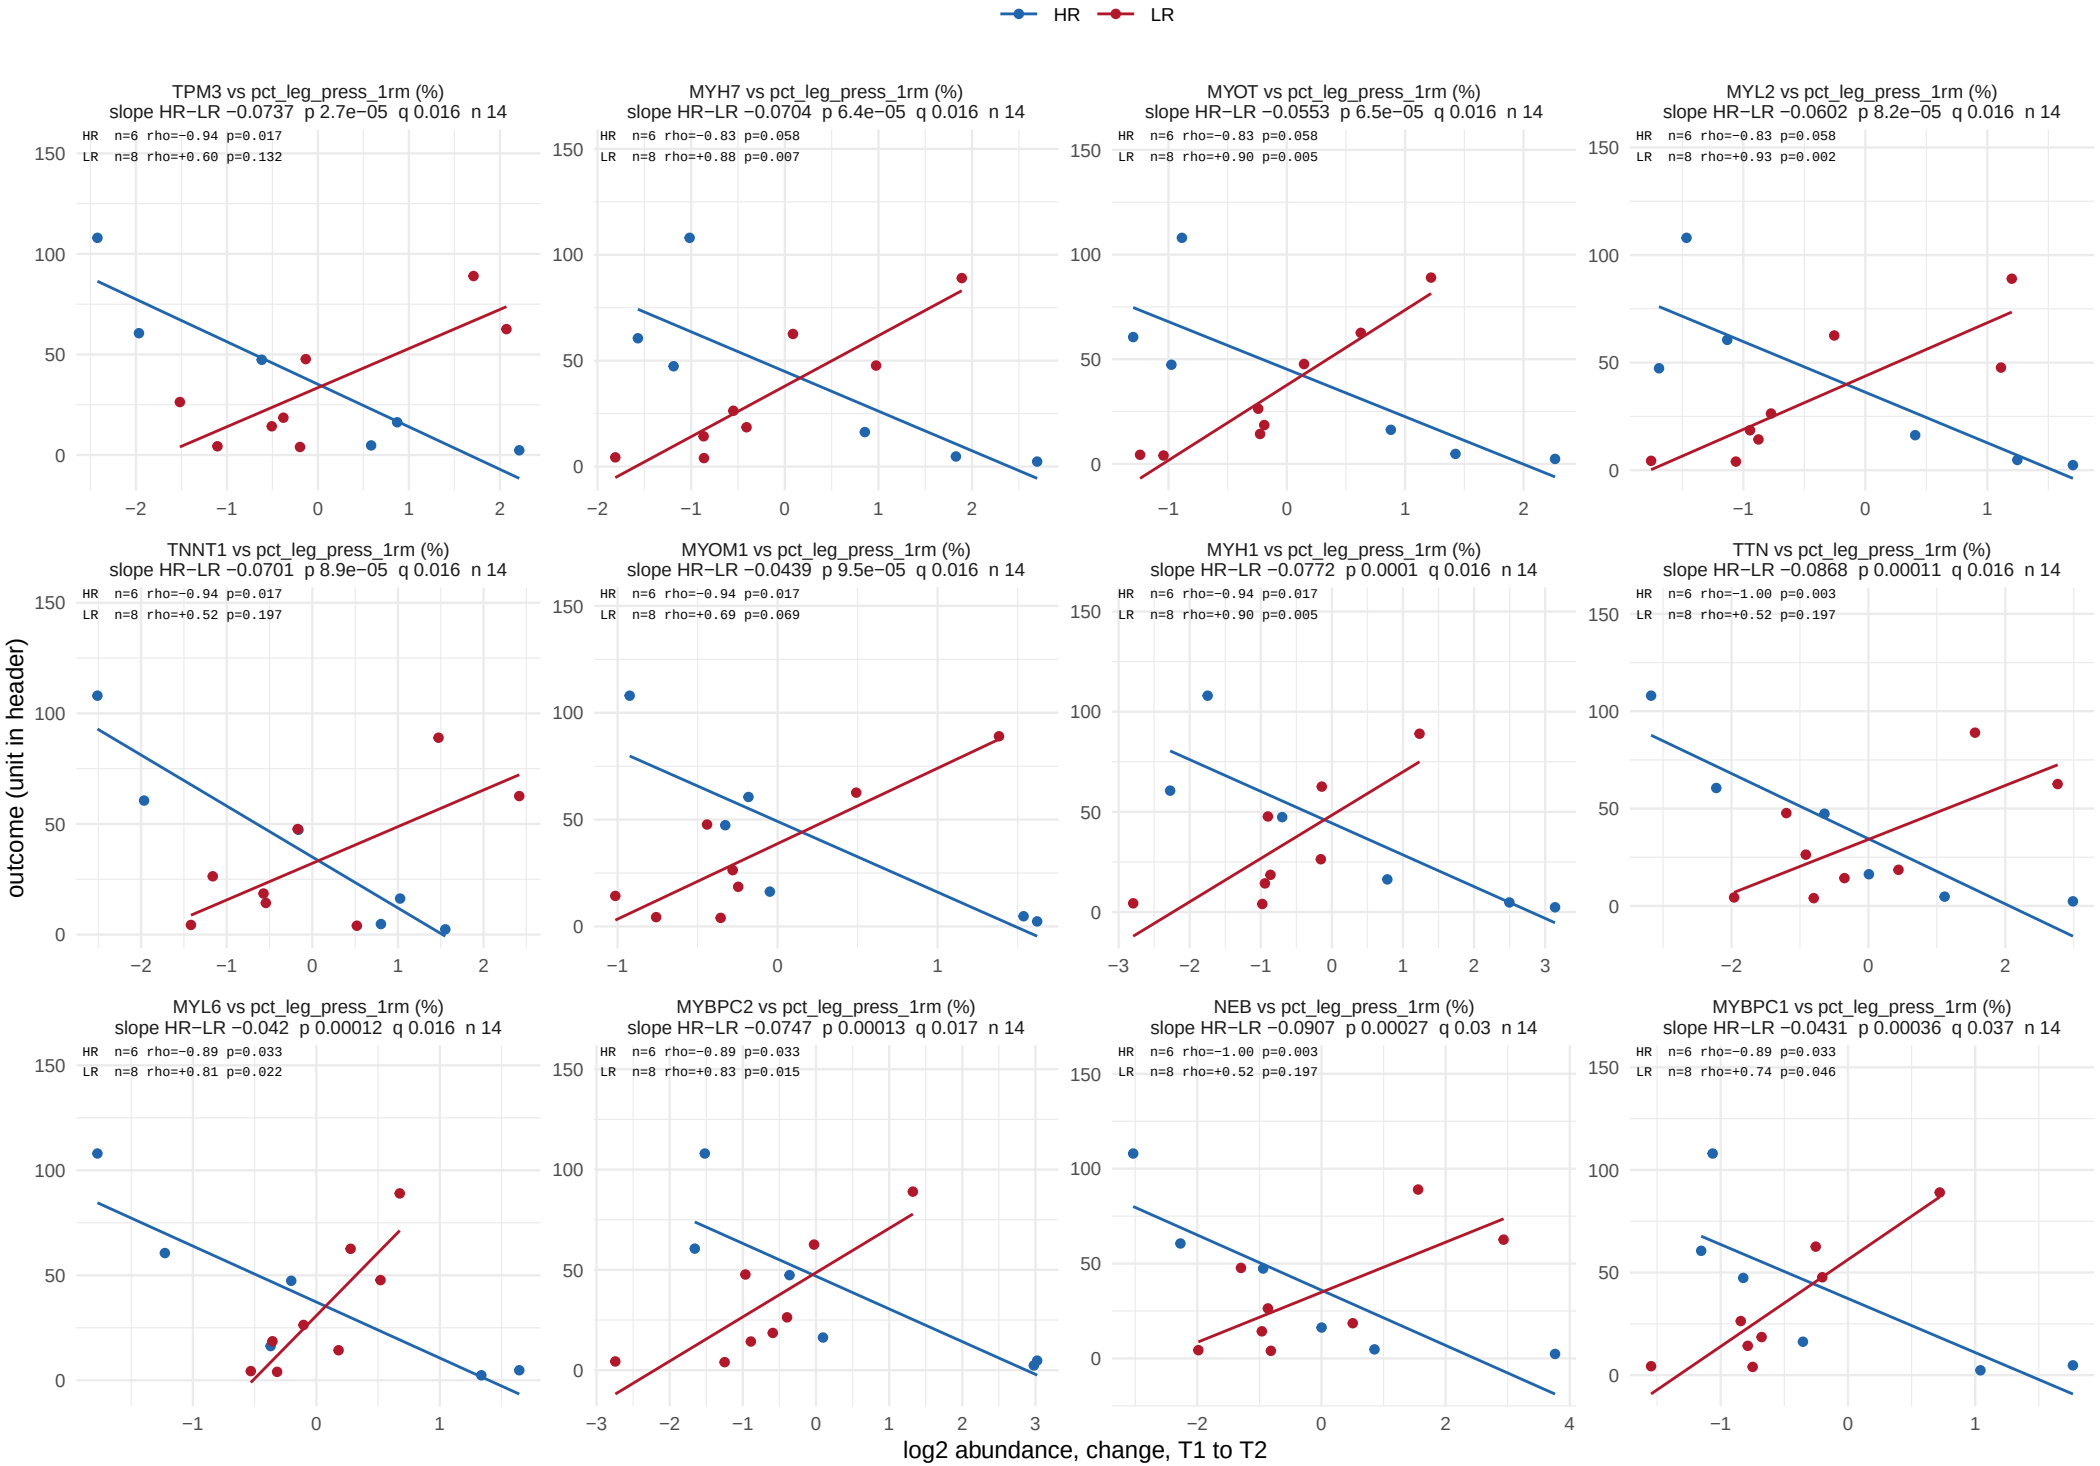

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


444 of 8450 feature−outcome pairs at p < 0.05, 20 at BH < 0.05. Page 2 of 37.

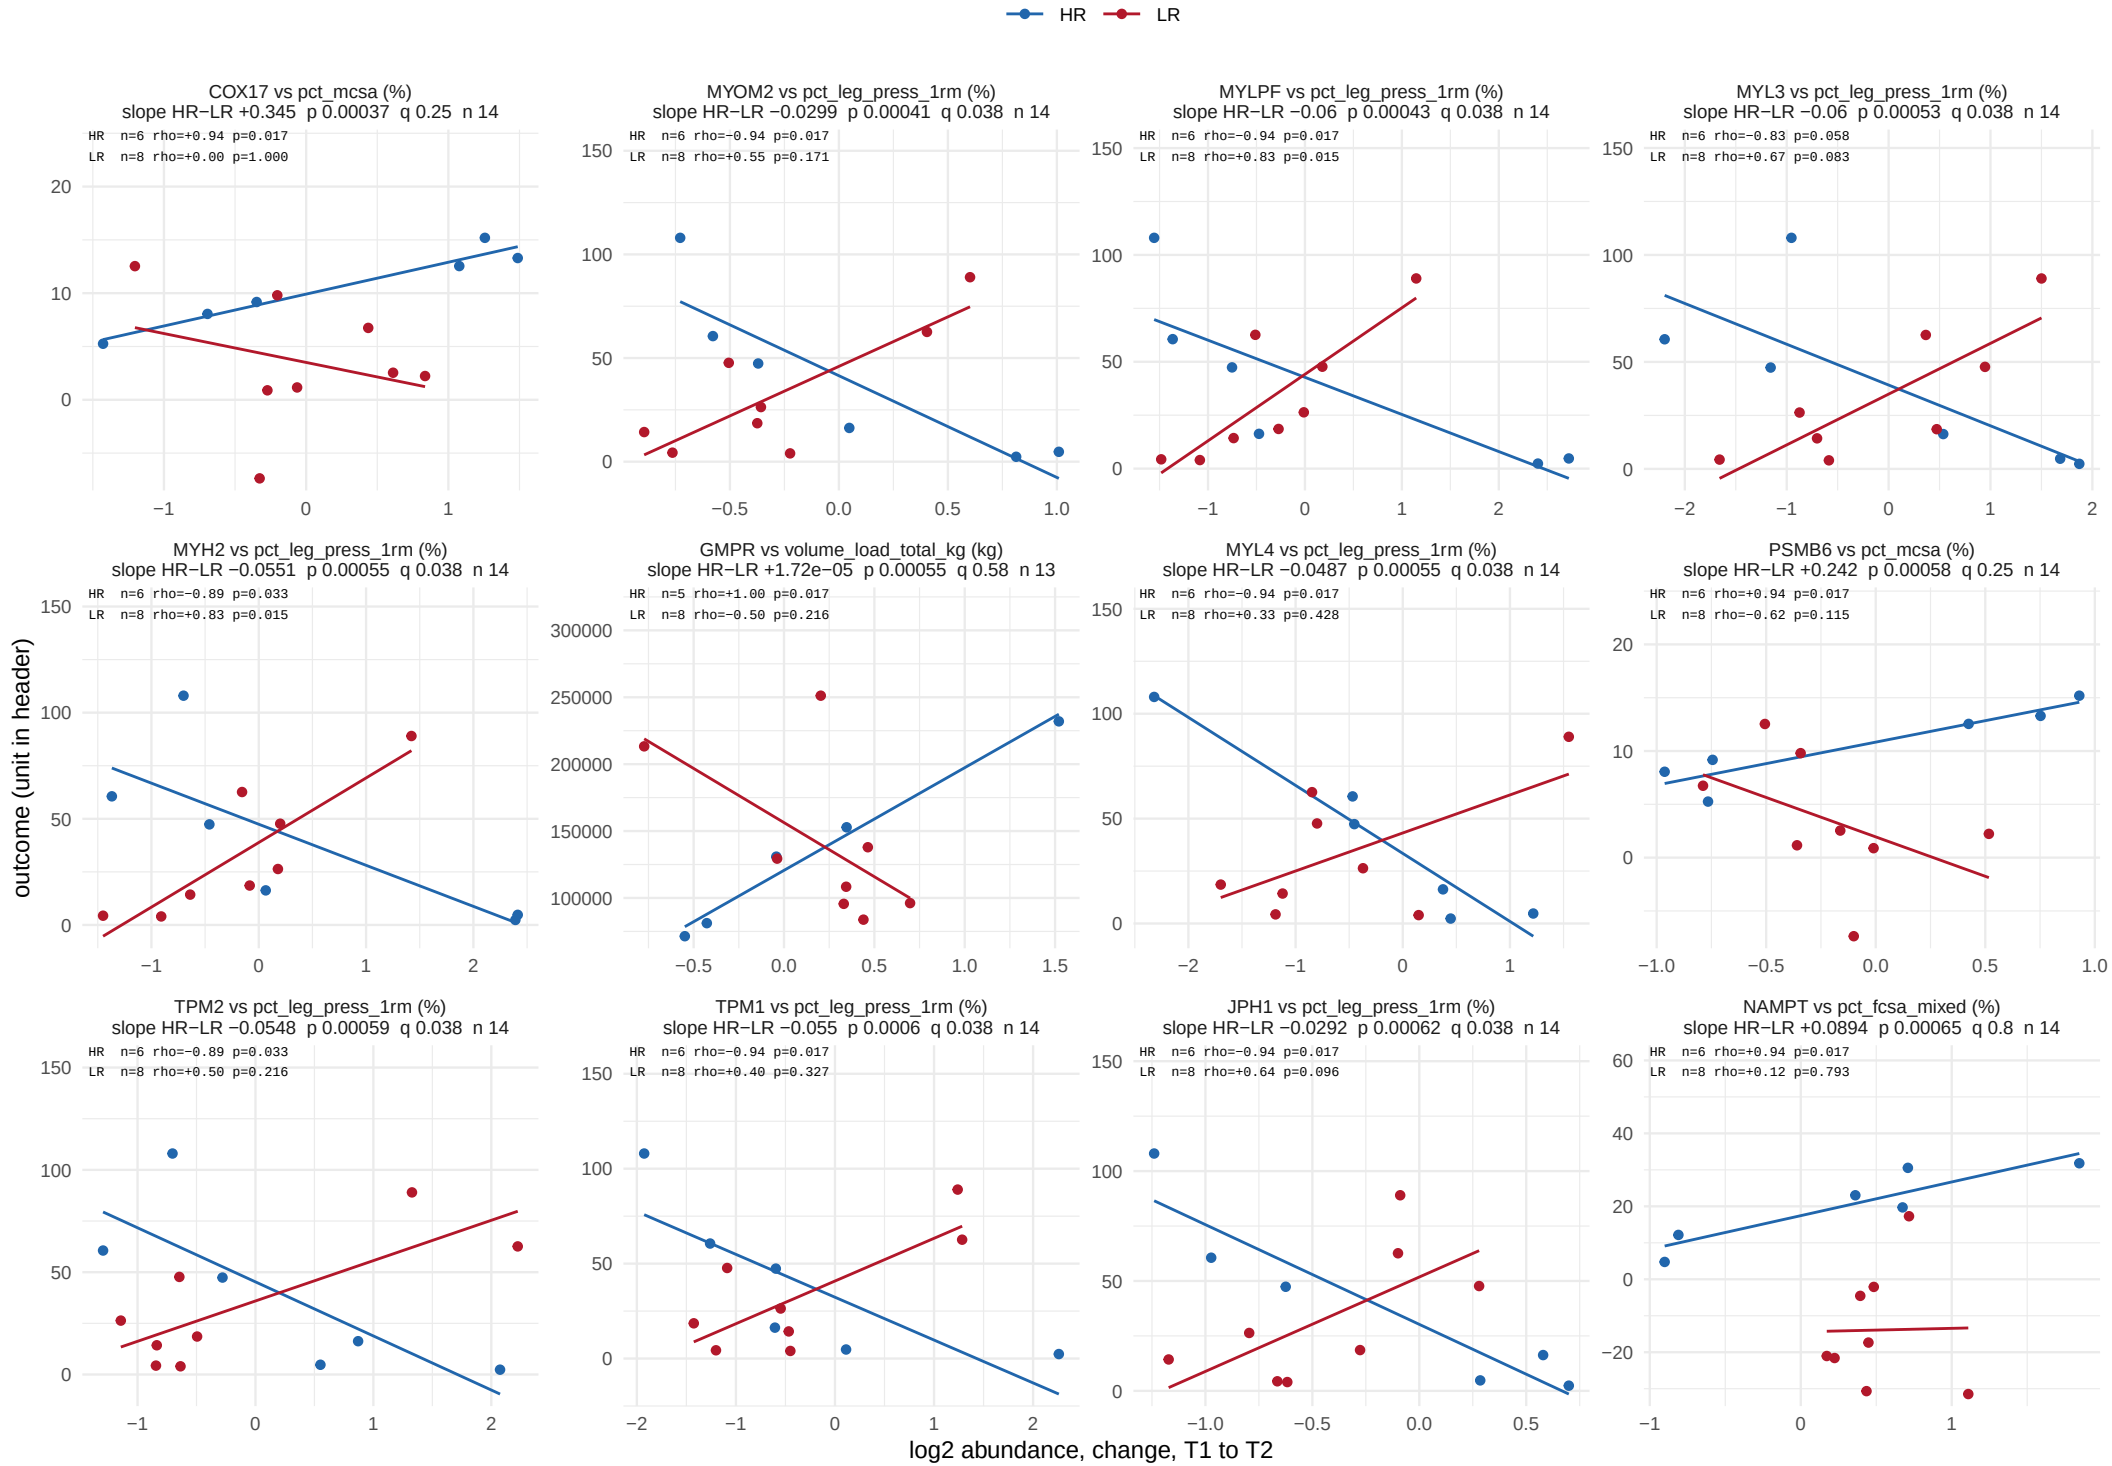

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


444 of 8450 feature−outcome pairs at p < 0.05, 20 at BH < 0.05. Page 3 of 37.

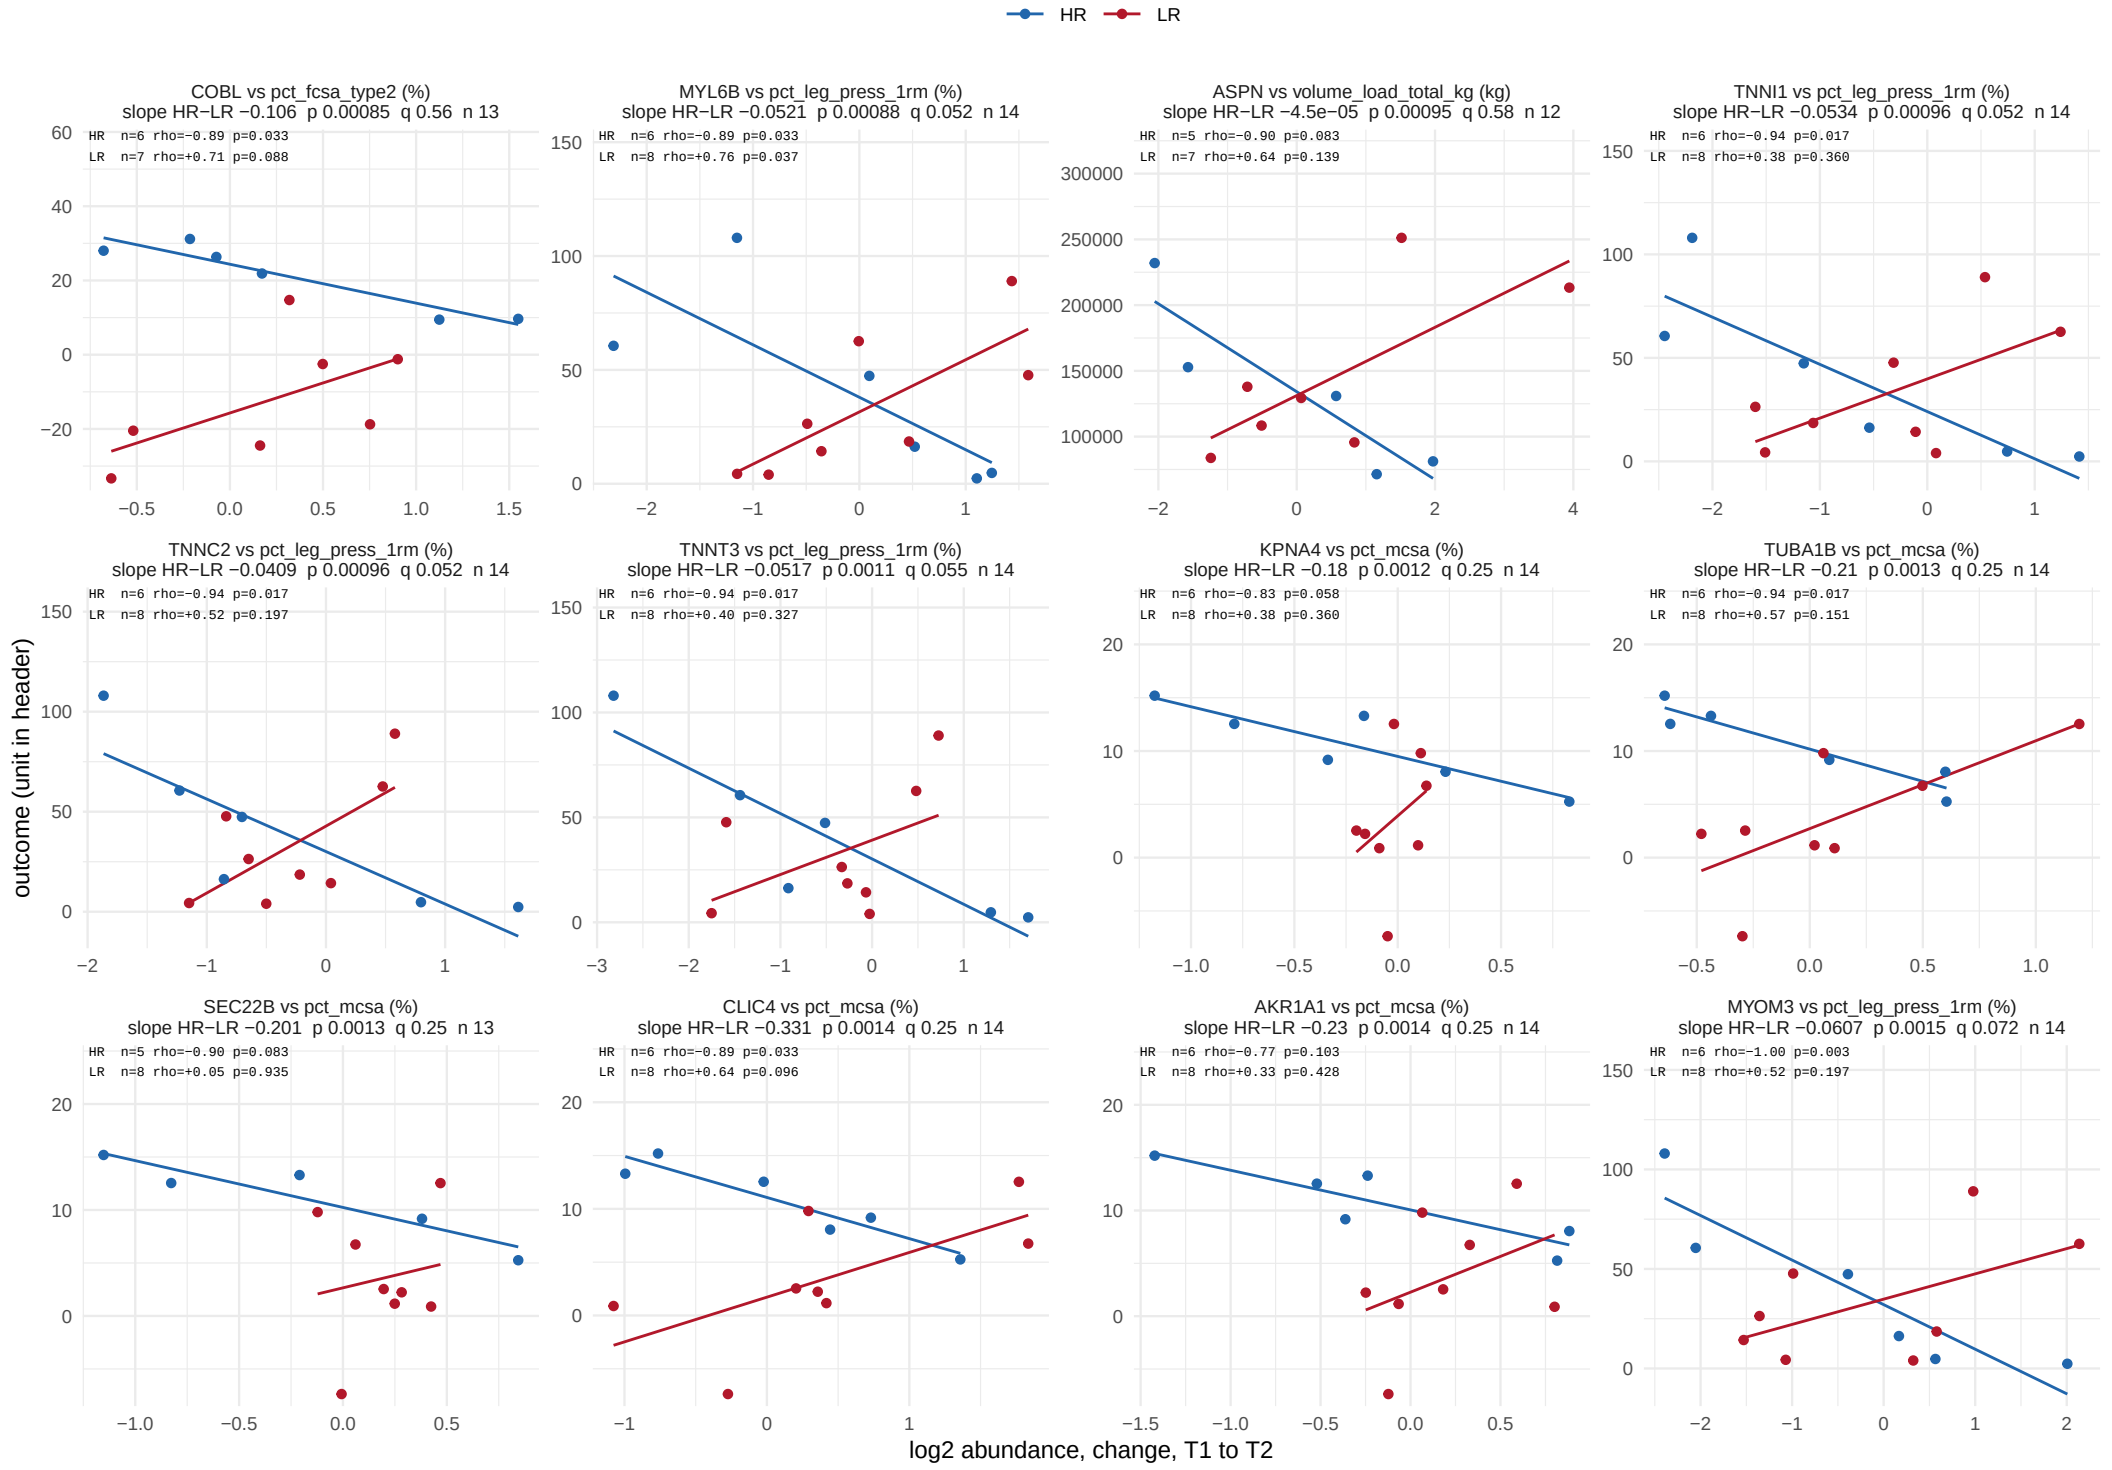

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


444 of 8450 feature−outcome pairs at p < 0.05, 20 at BH < 0.05. Page 4 of 37.

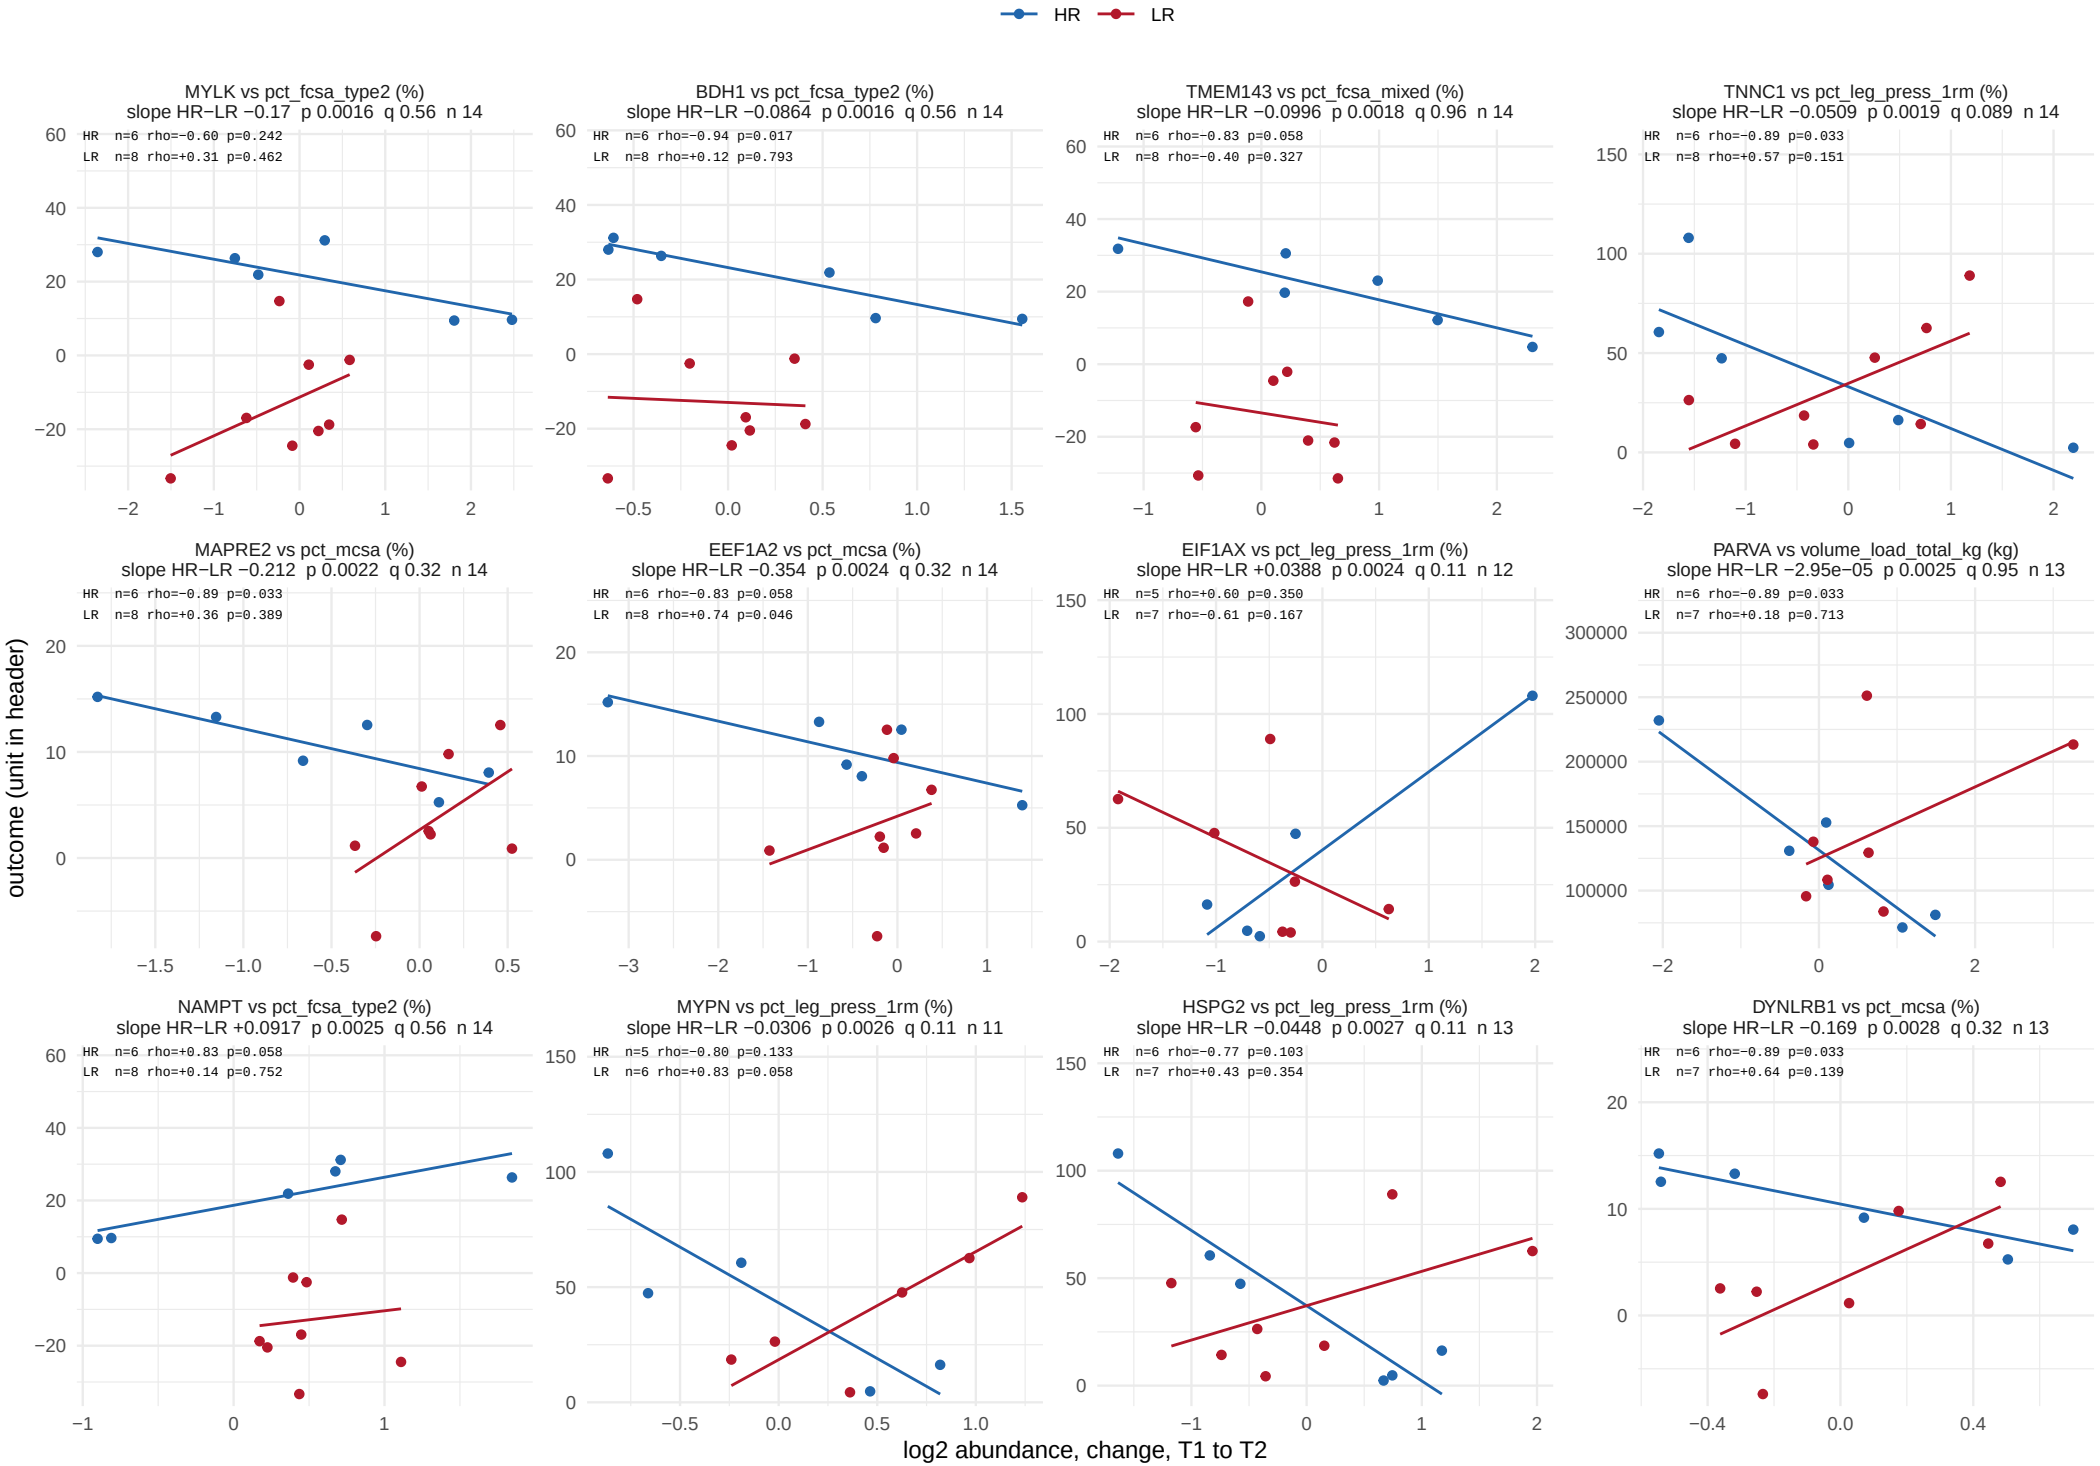

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


444 of 8450 feature−outcome pairs at p < 0.05, 20 at BH < 0.05. Page 5 of 37.

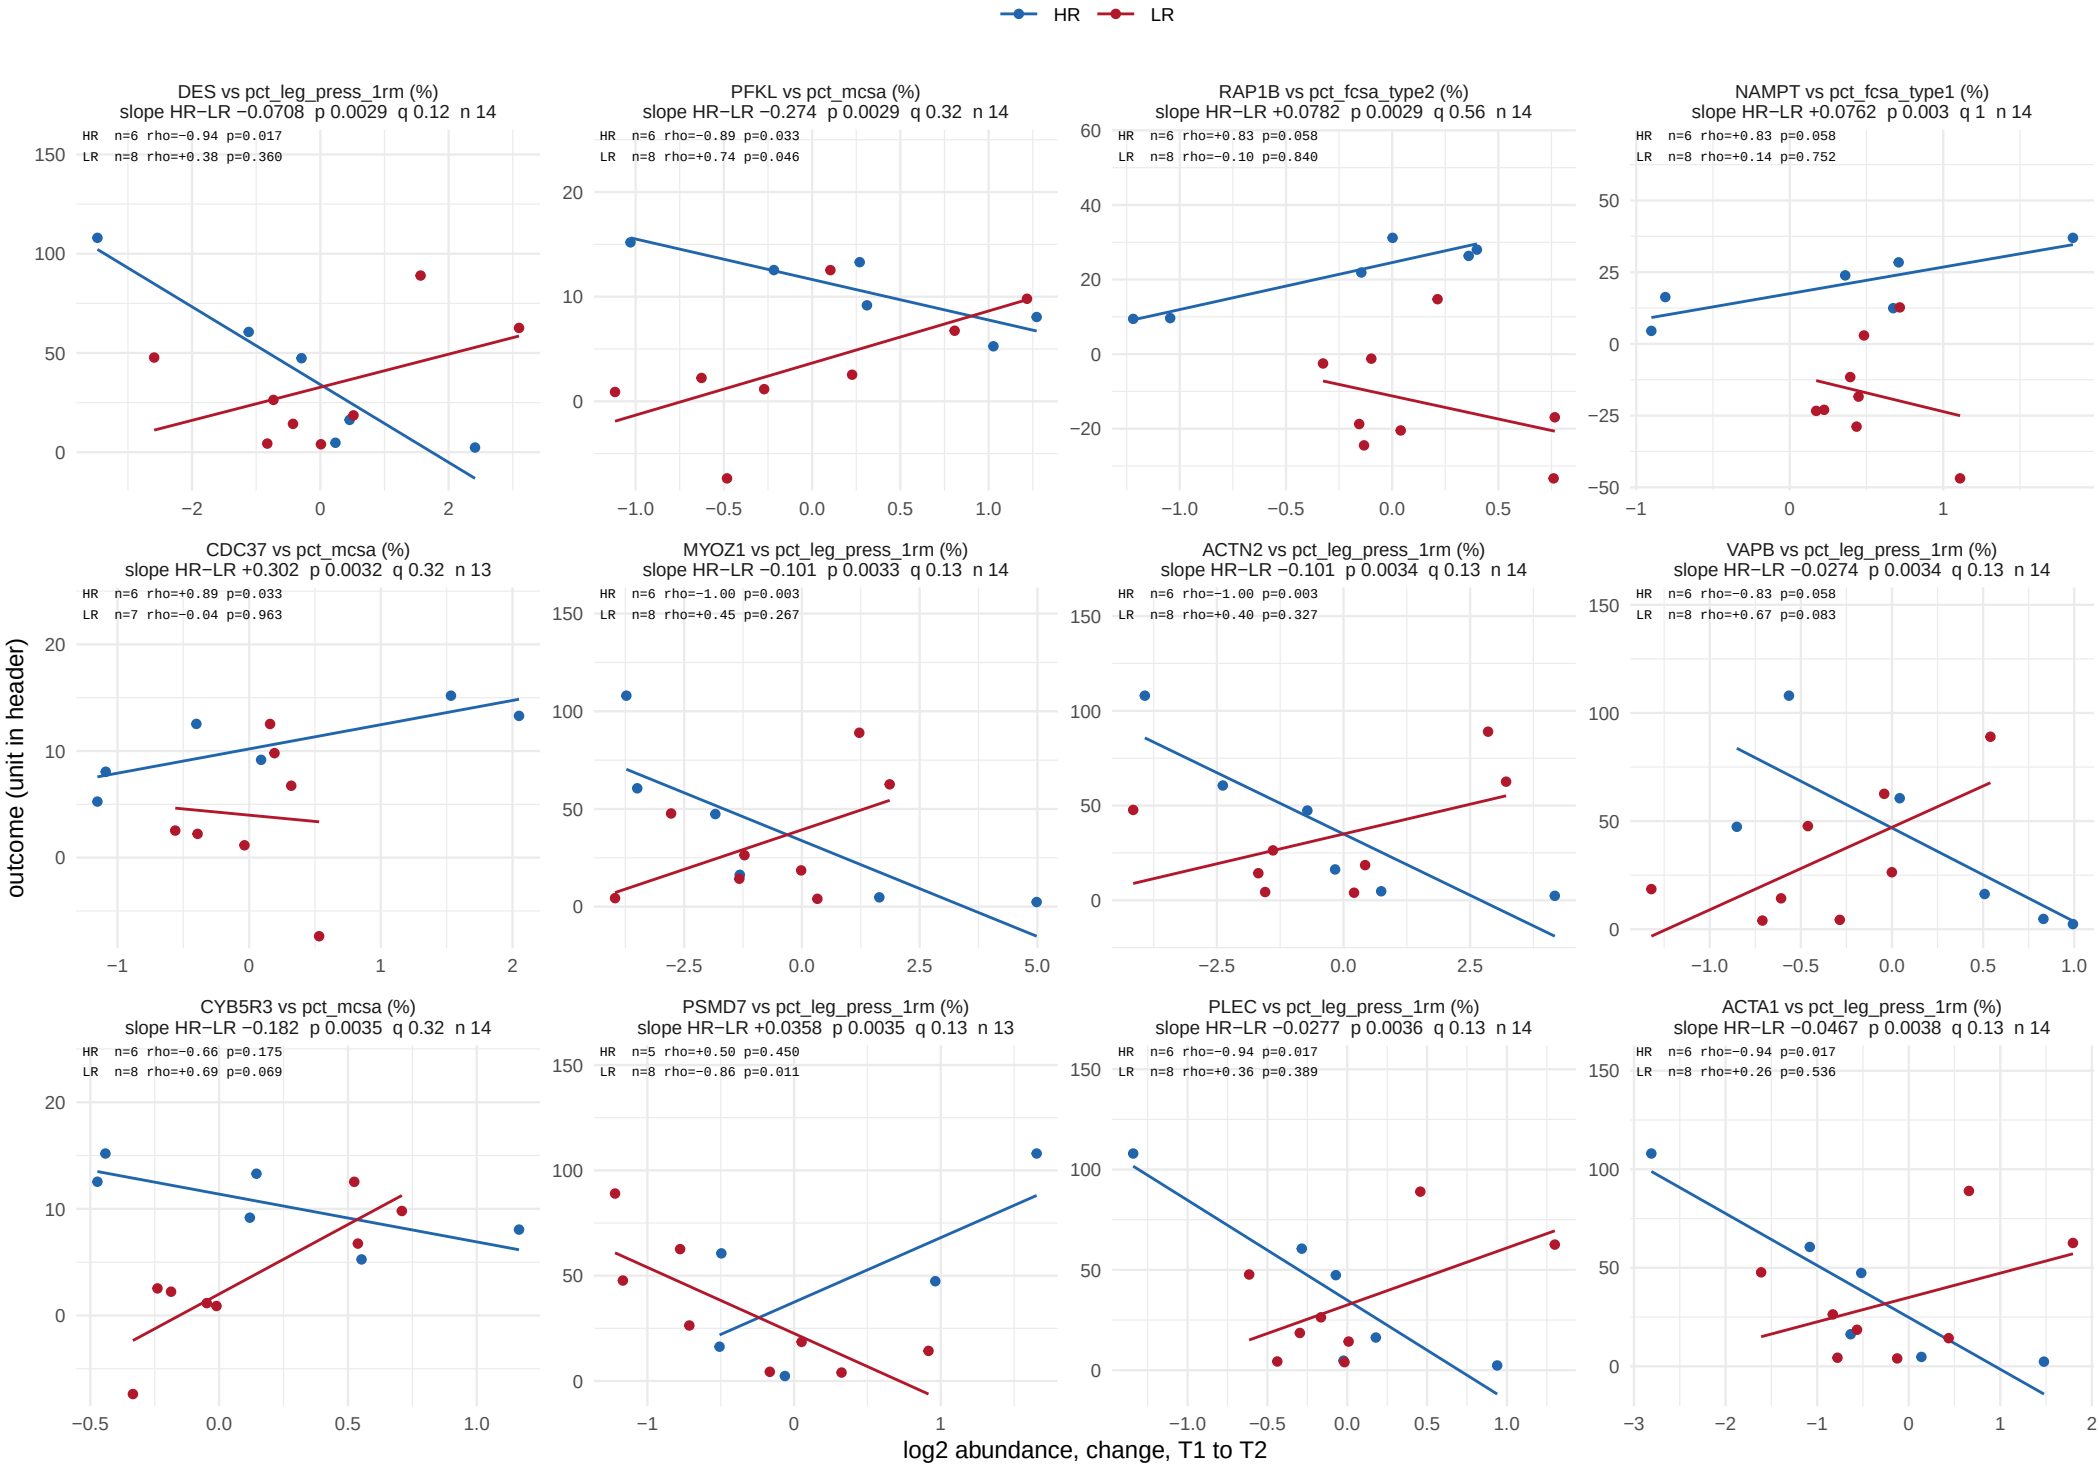

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


444 of 8450 feature−outcome pairs at p < 0.05, 20 at BH < 0.05. Page 6 of 37.

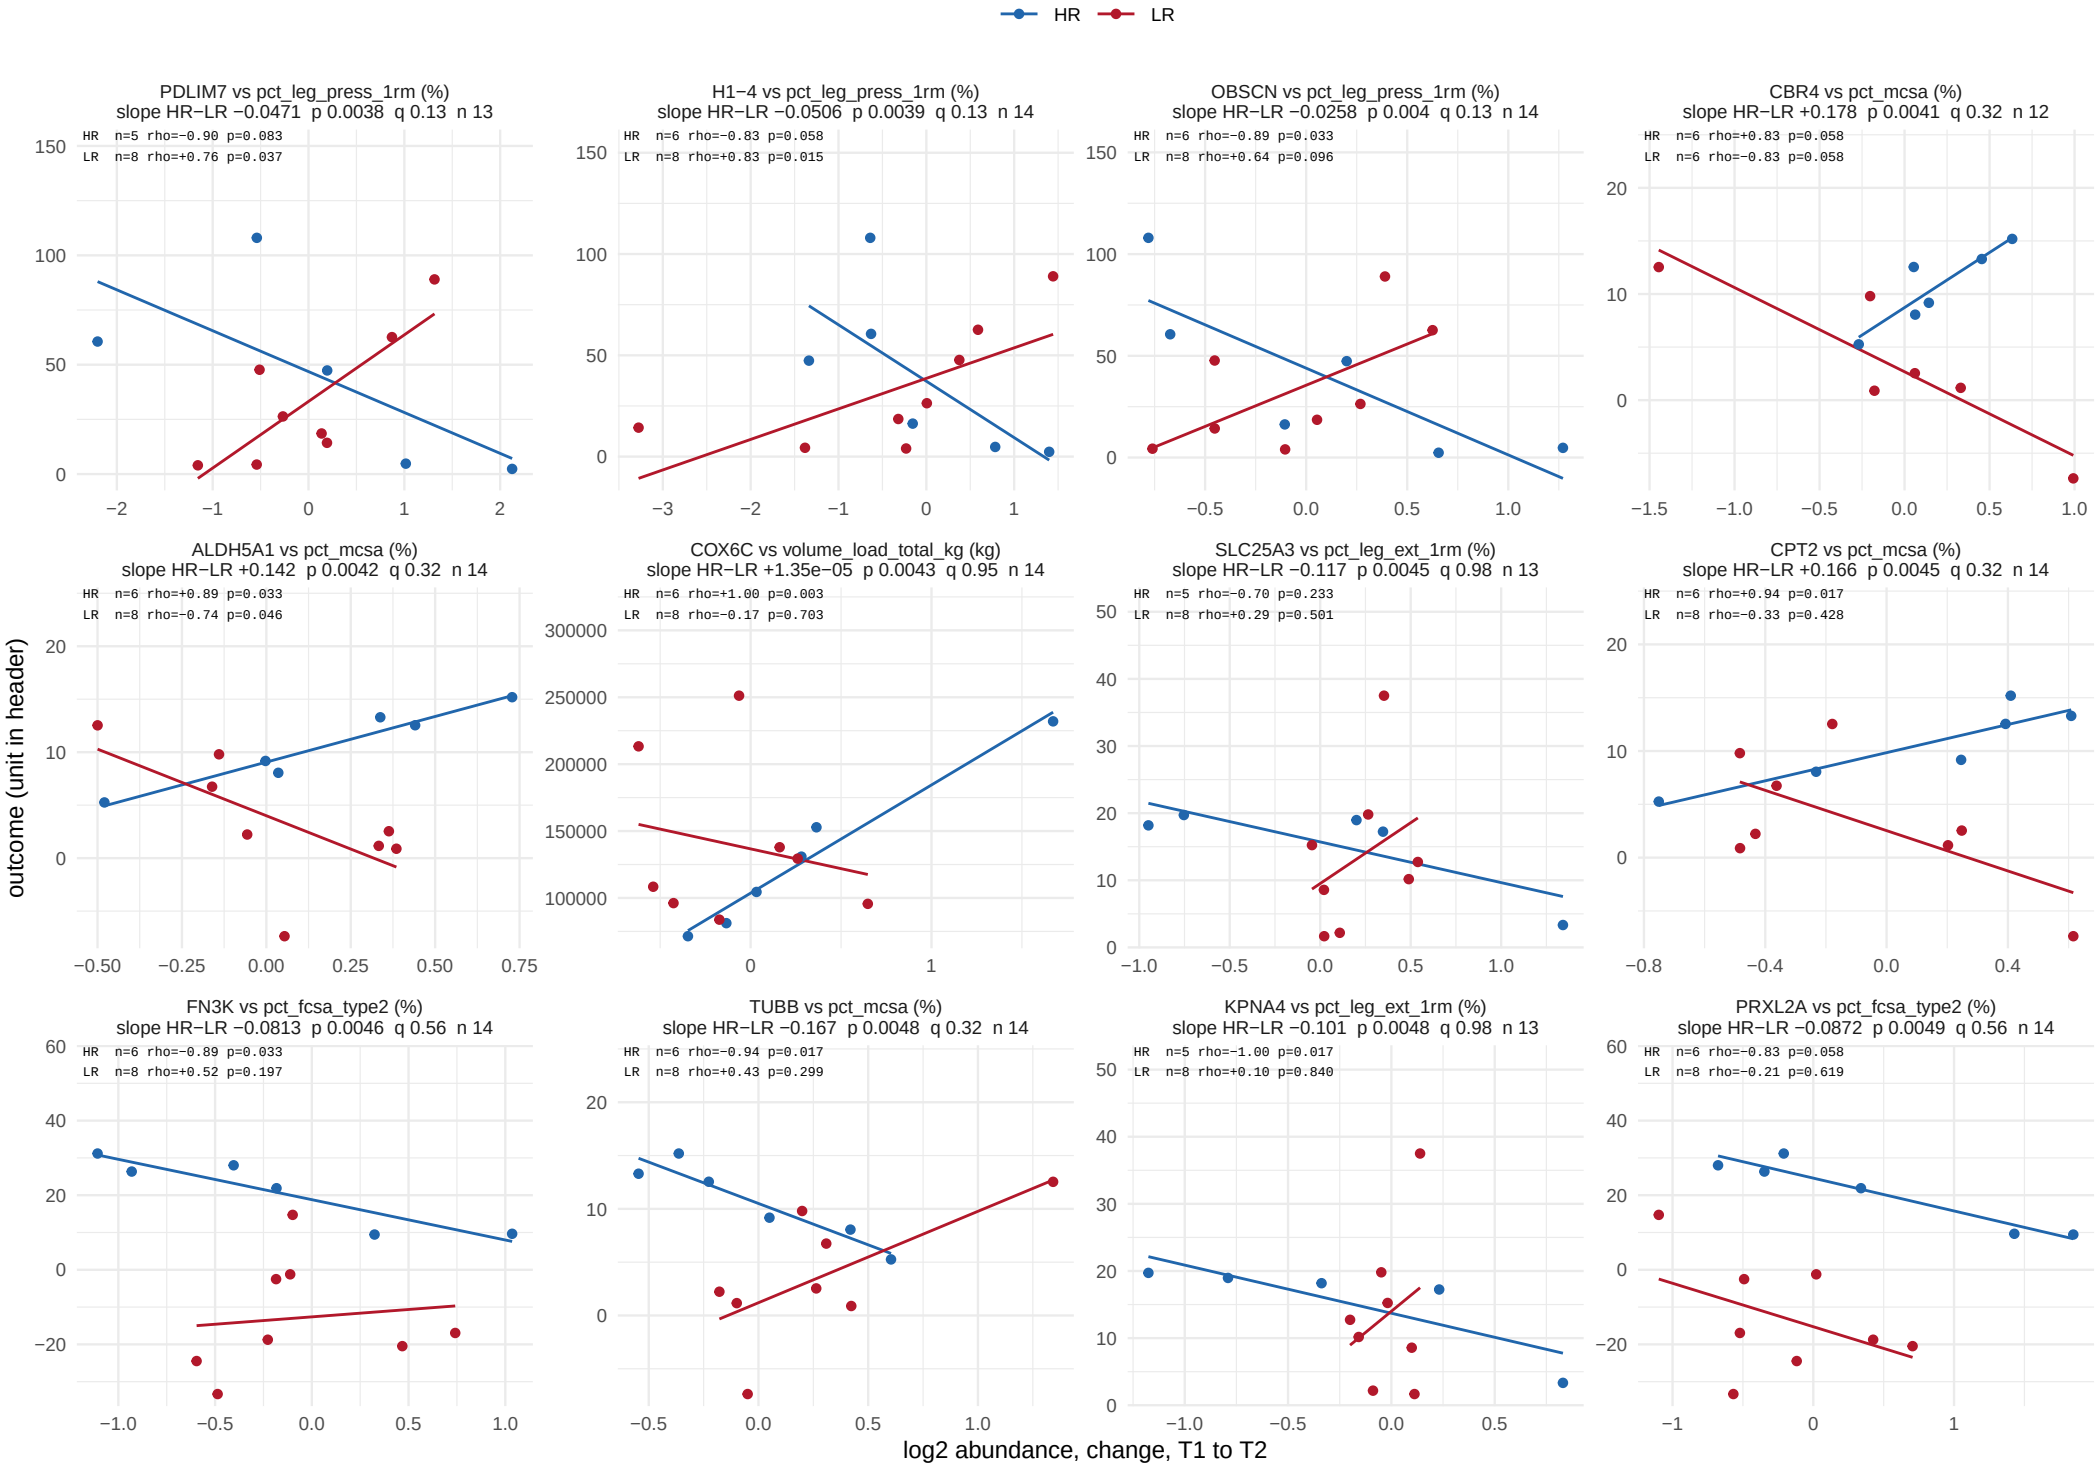

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


444 of 8450 feature−outcome pairs at p < 0.05, 20 at BH < 0.05. Page 7 of 37.

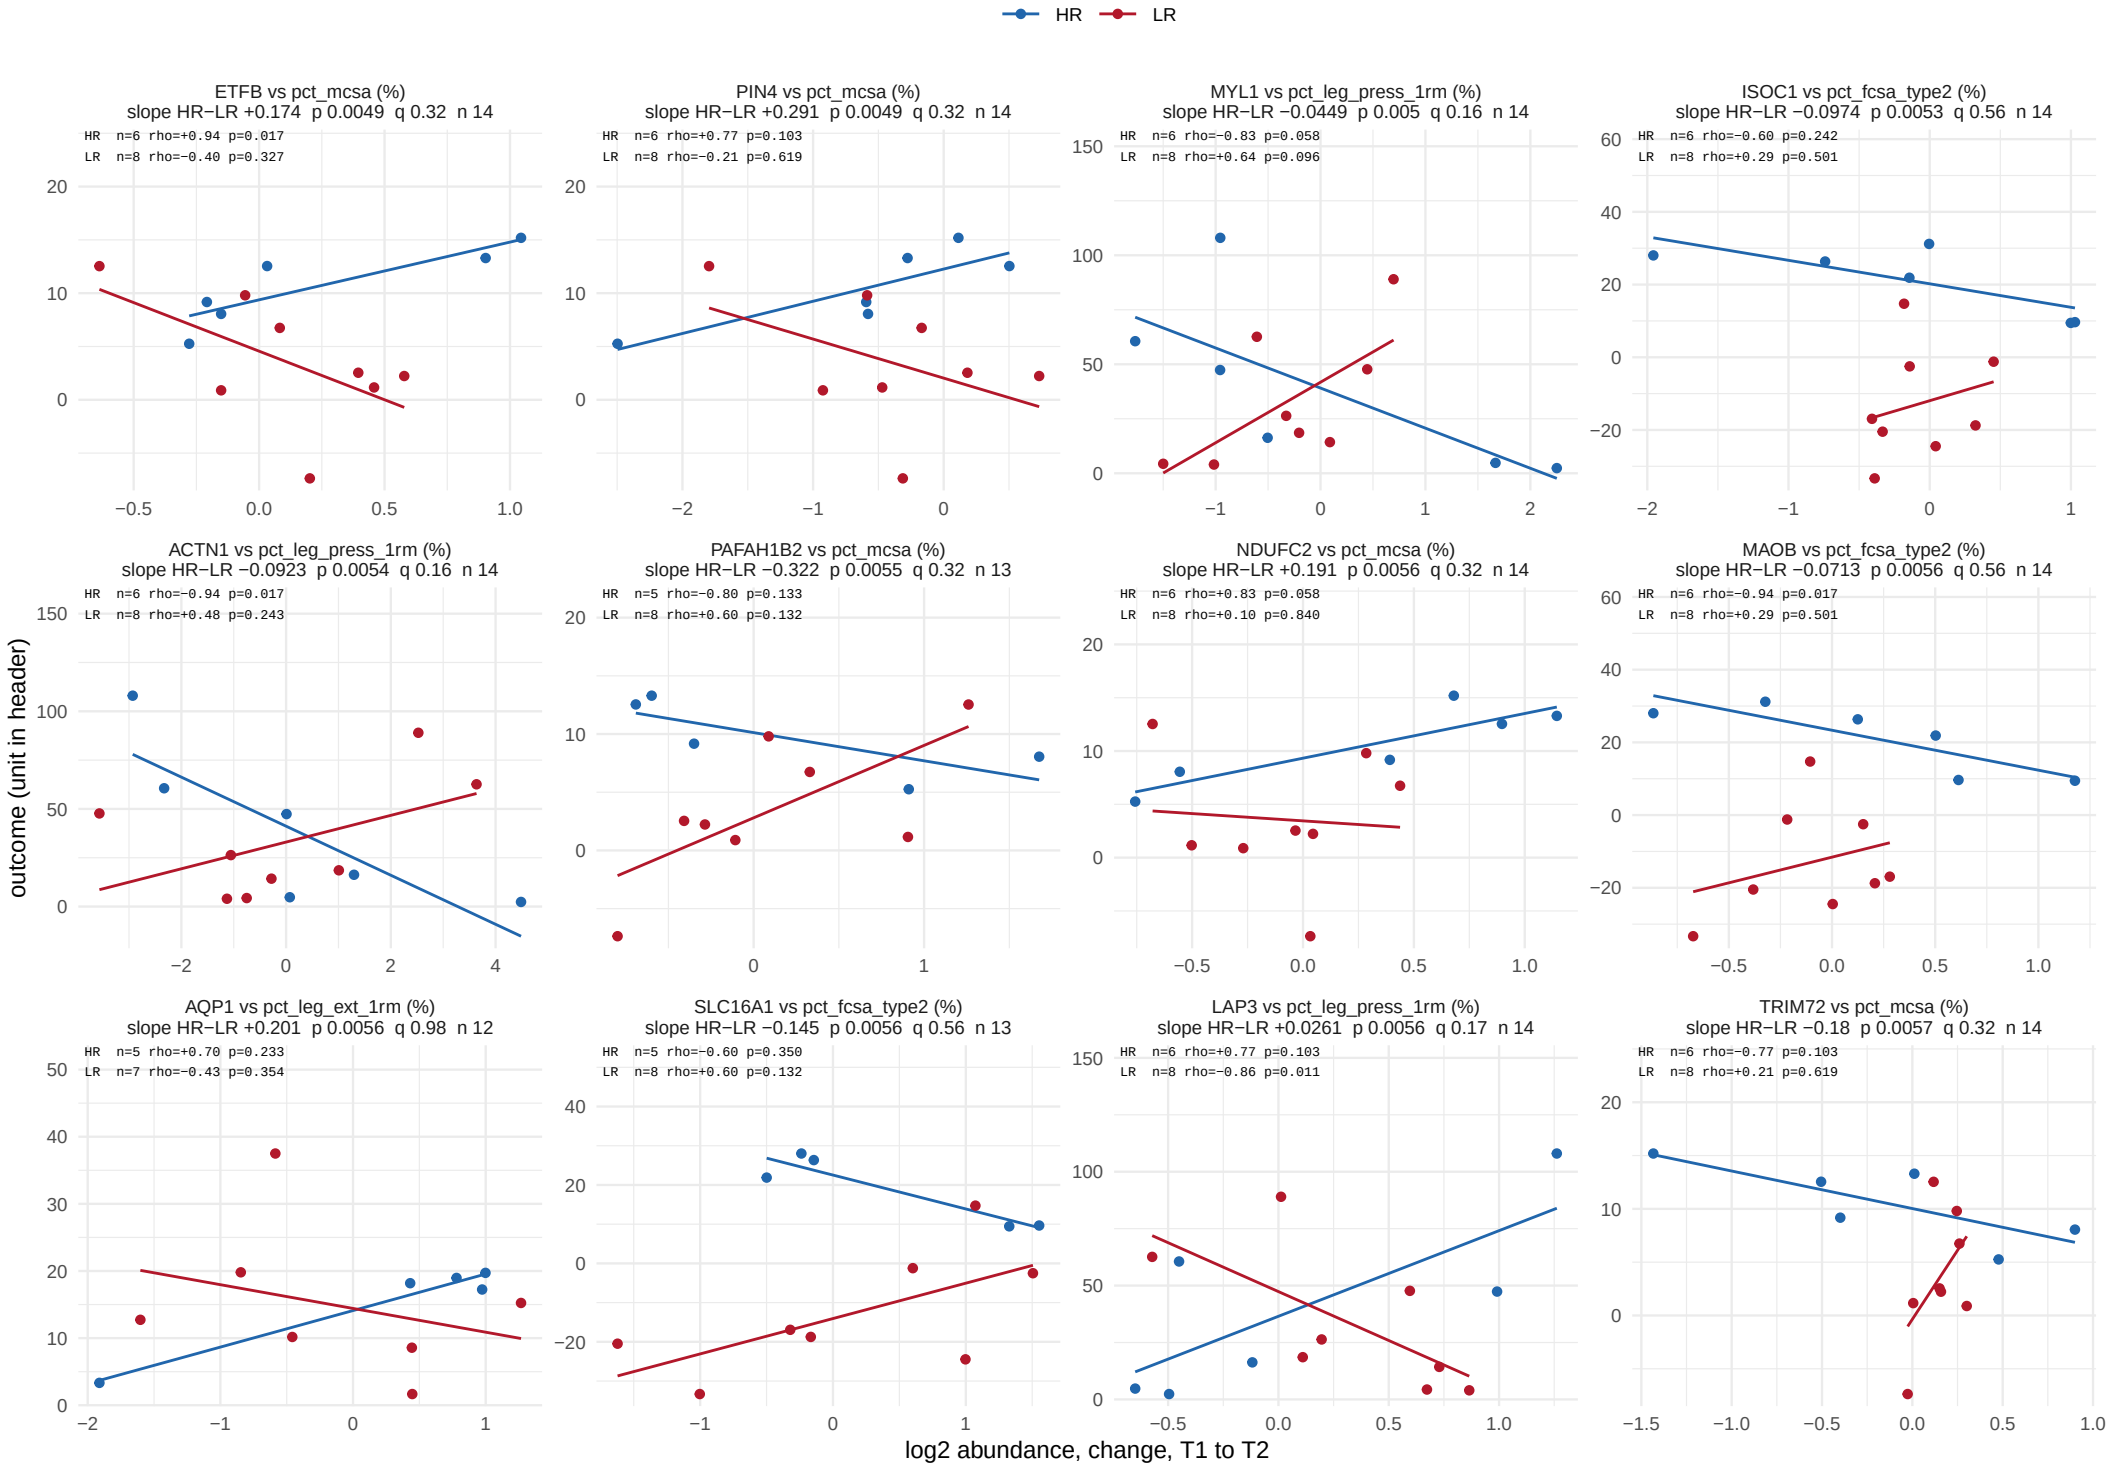

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


444 of 8450 feature−outcome pairs at p < 0.05, 20 at BH < 0.05. Page 8 of 37.

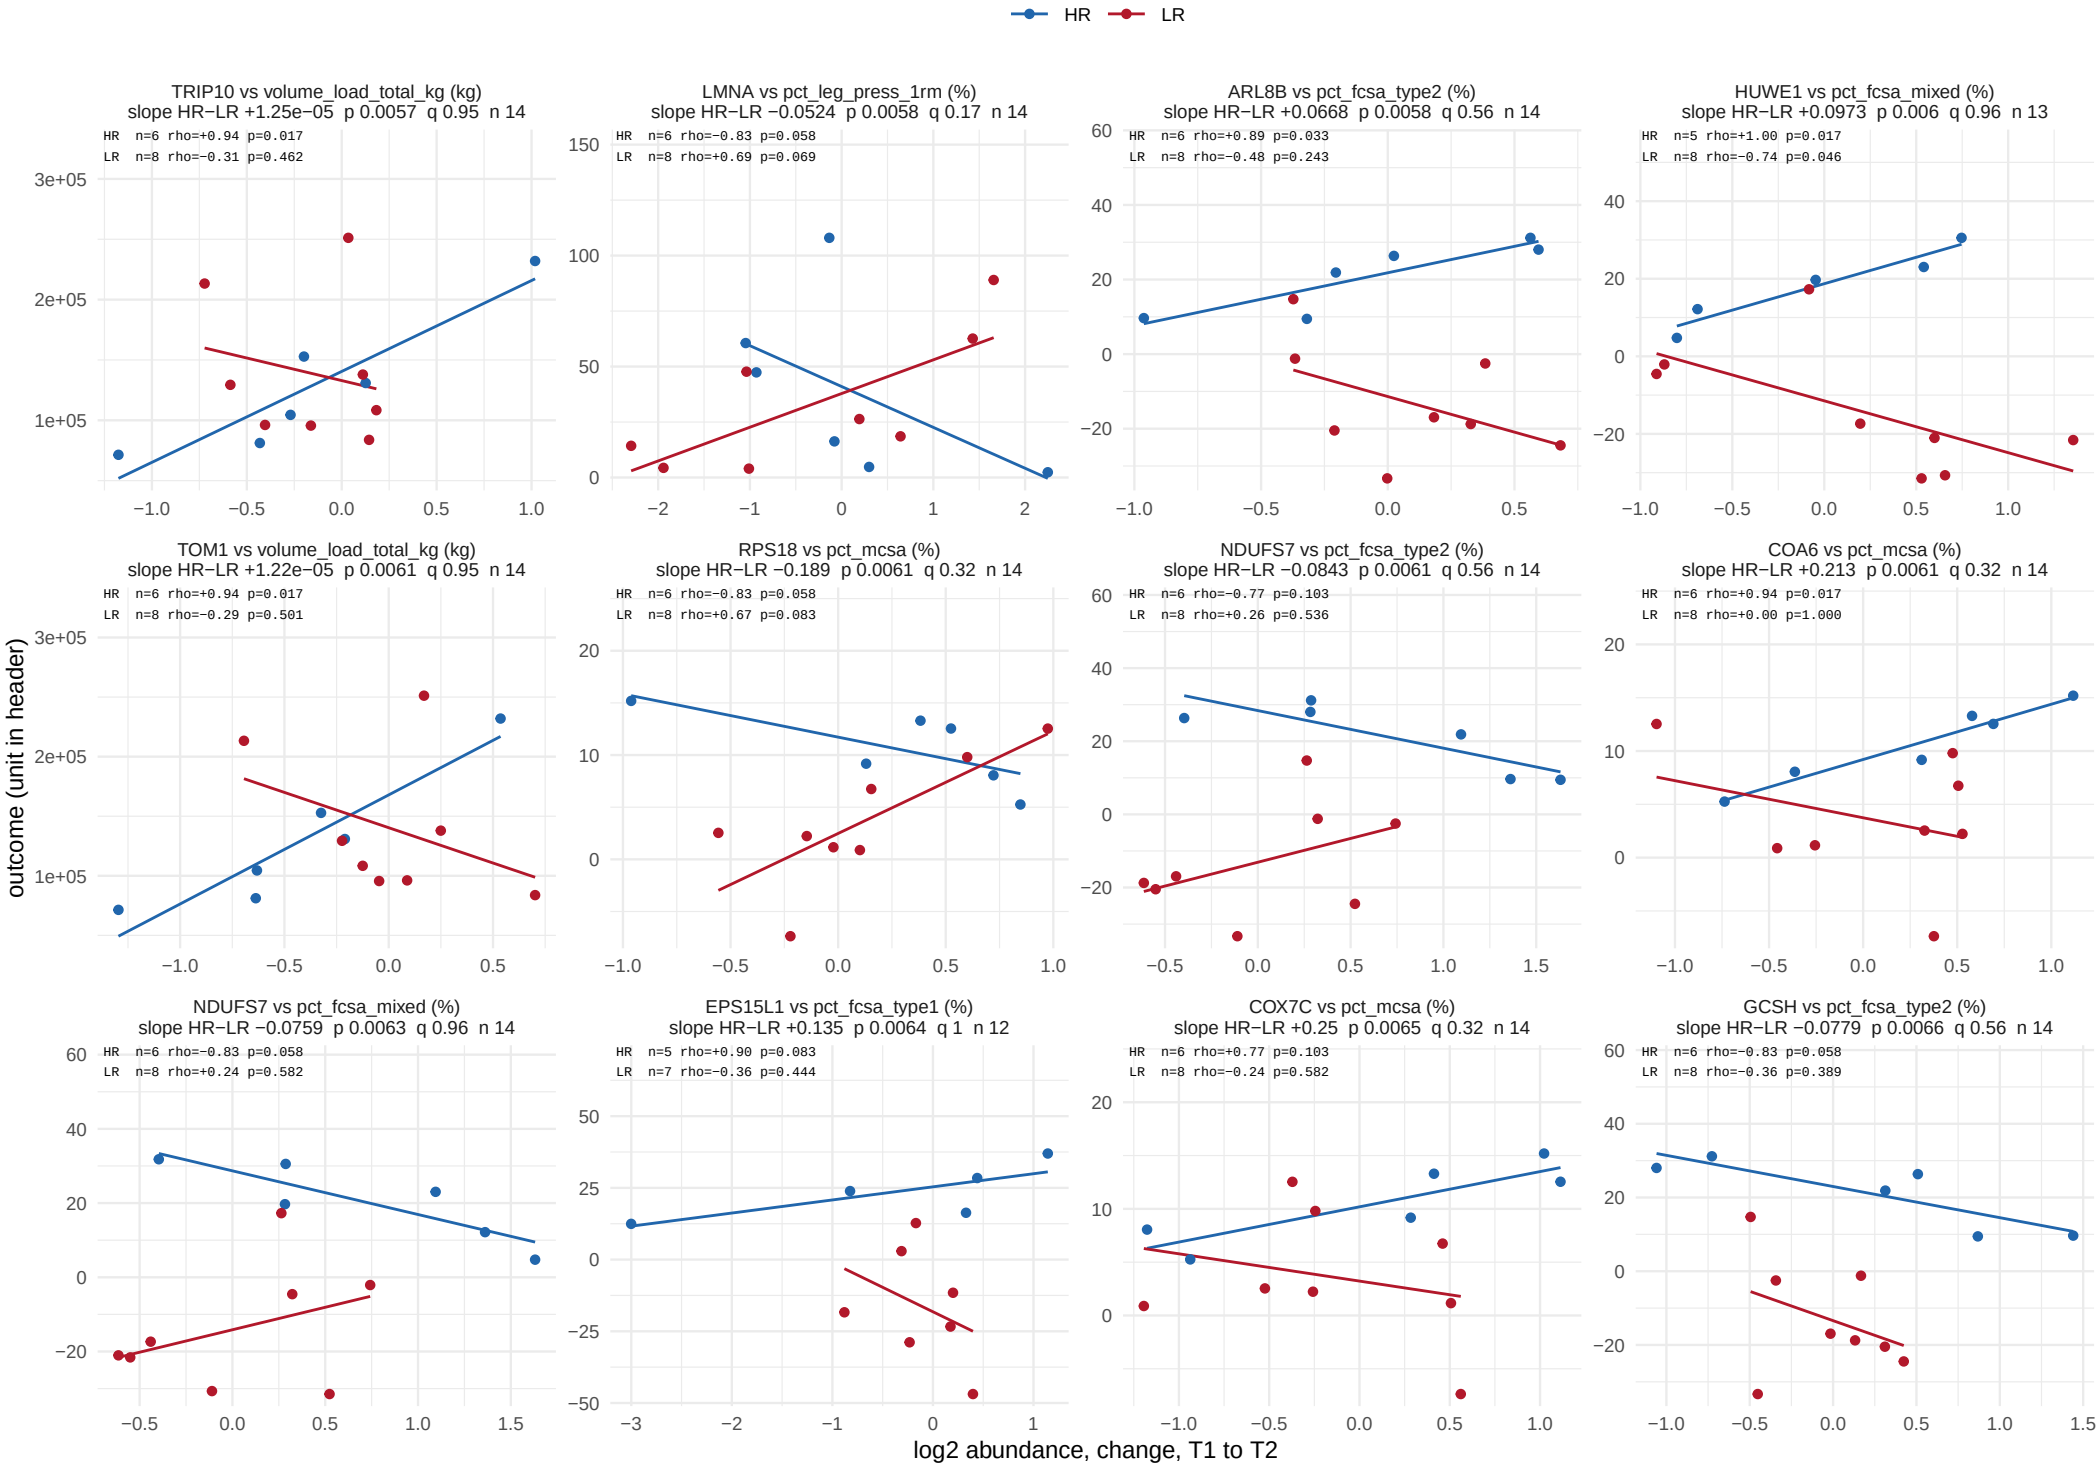

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


444 of 8450 feature−outcome pairs at p < 0.05, 20 at BH < 0.05. Page 9 of 37.

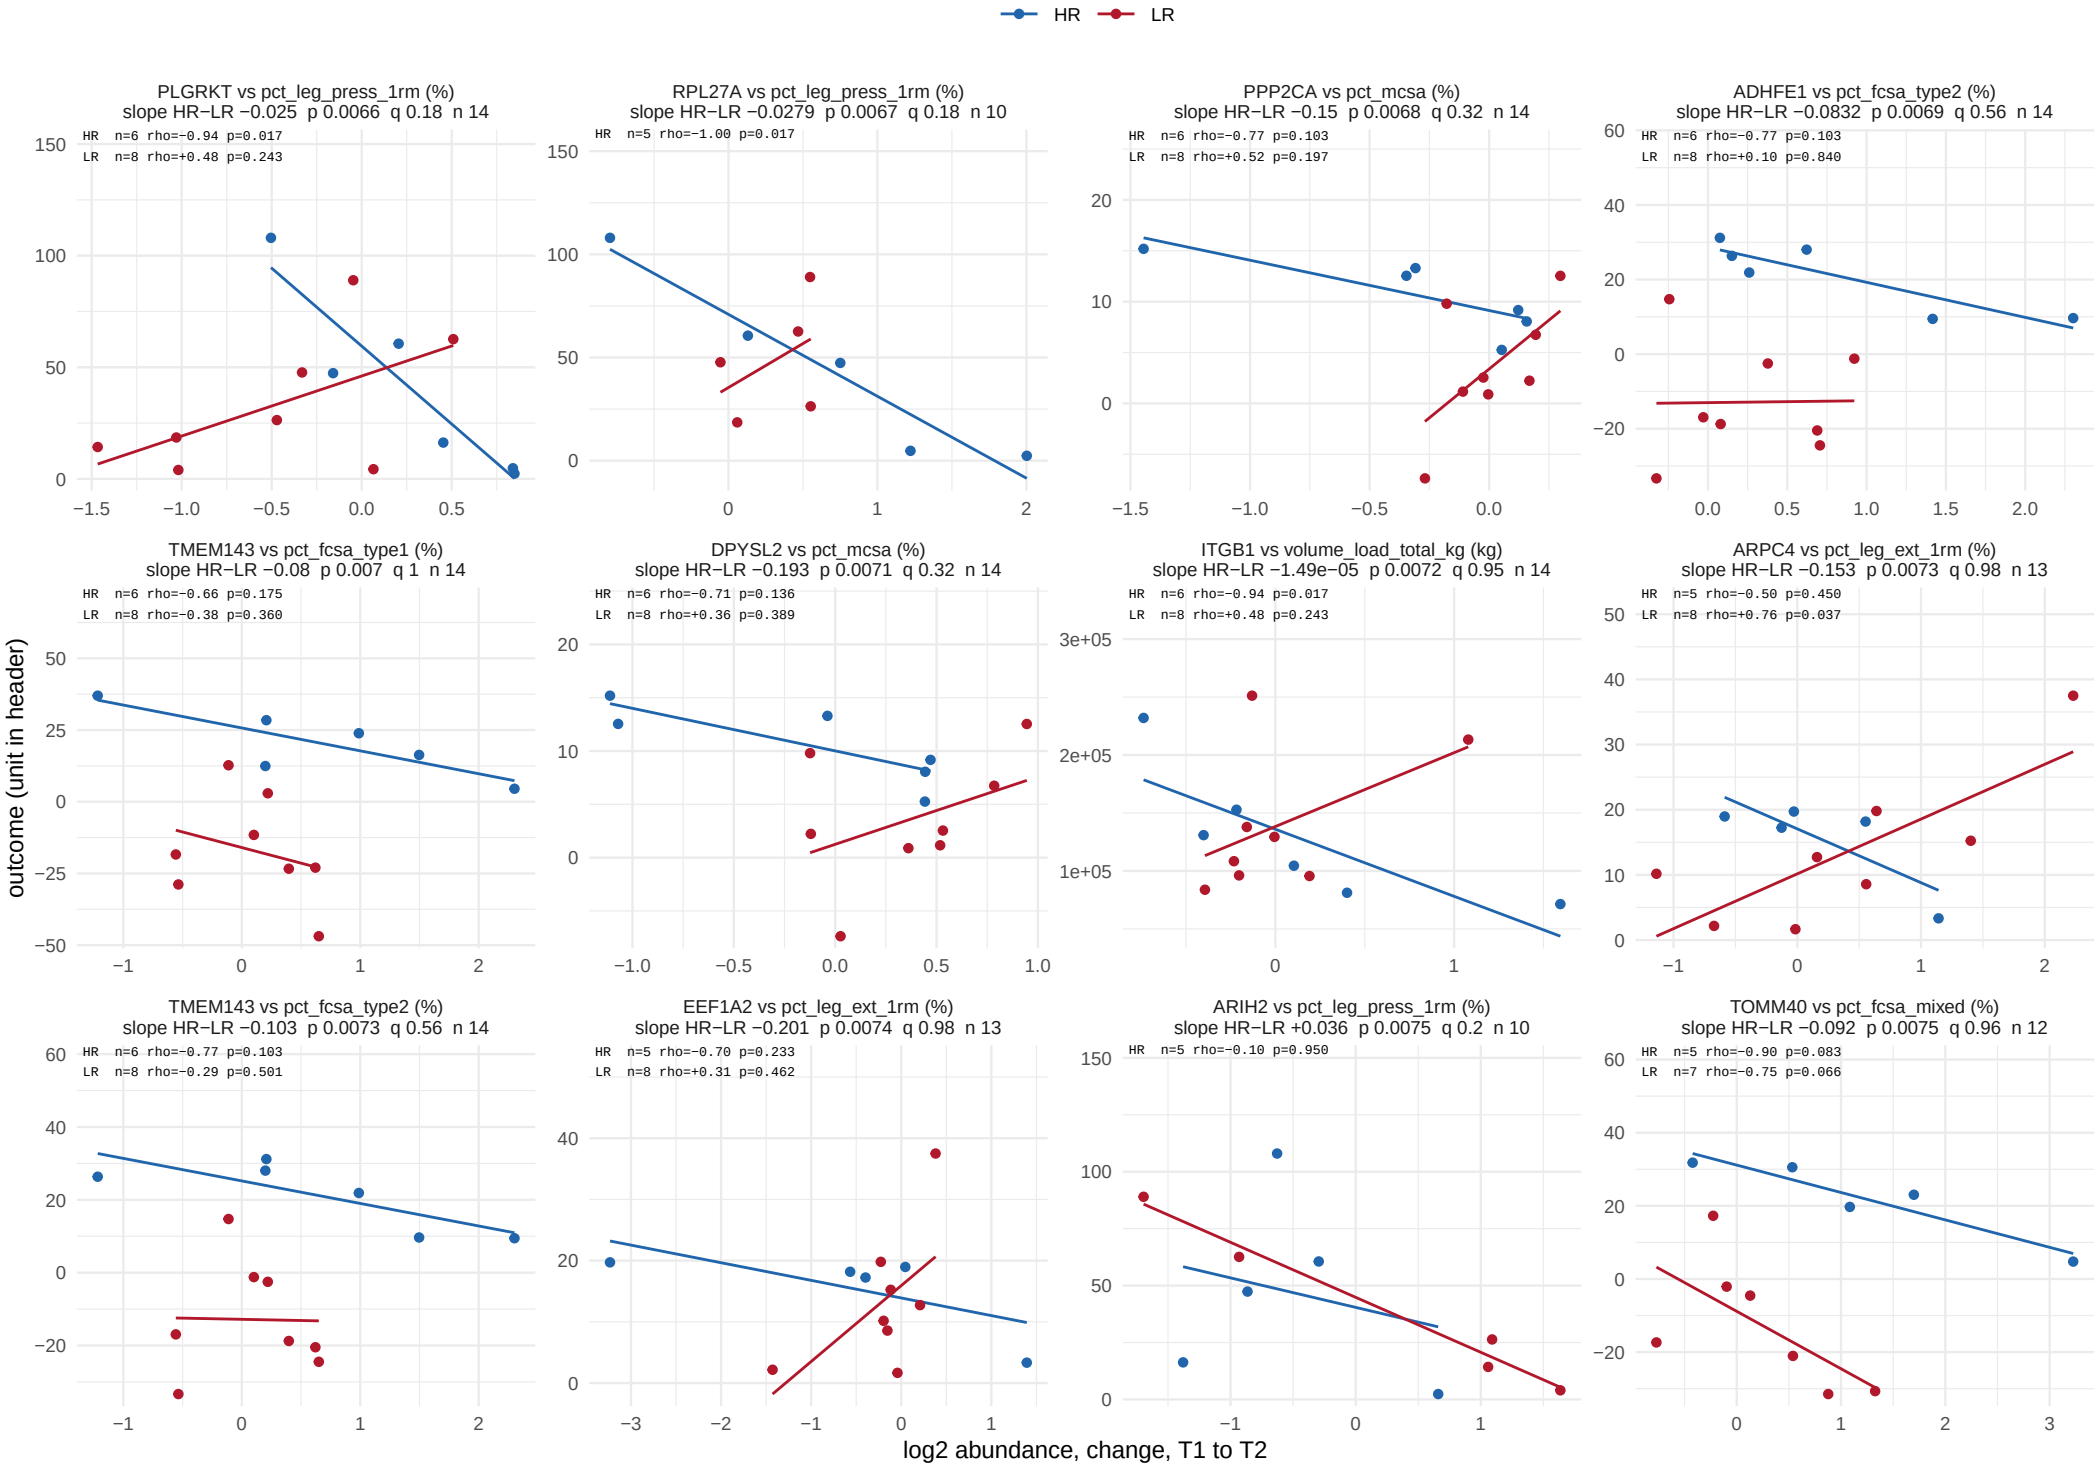

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


444 of 8450 feature−outcome pairs at p < 0.05, 20 at BH < 0.05. Page 10 of 37.

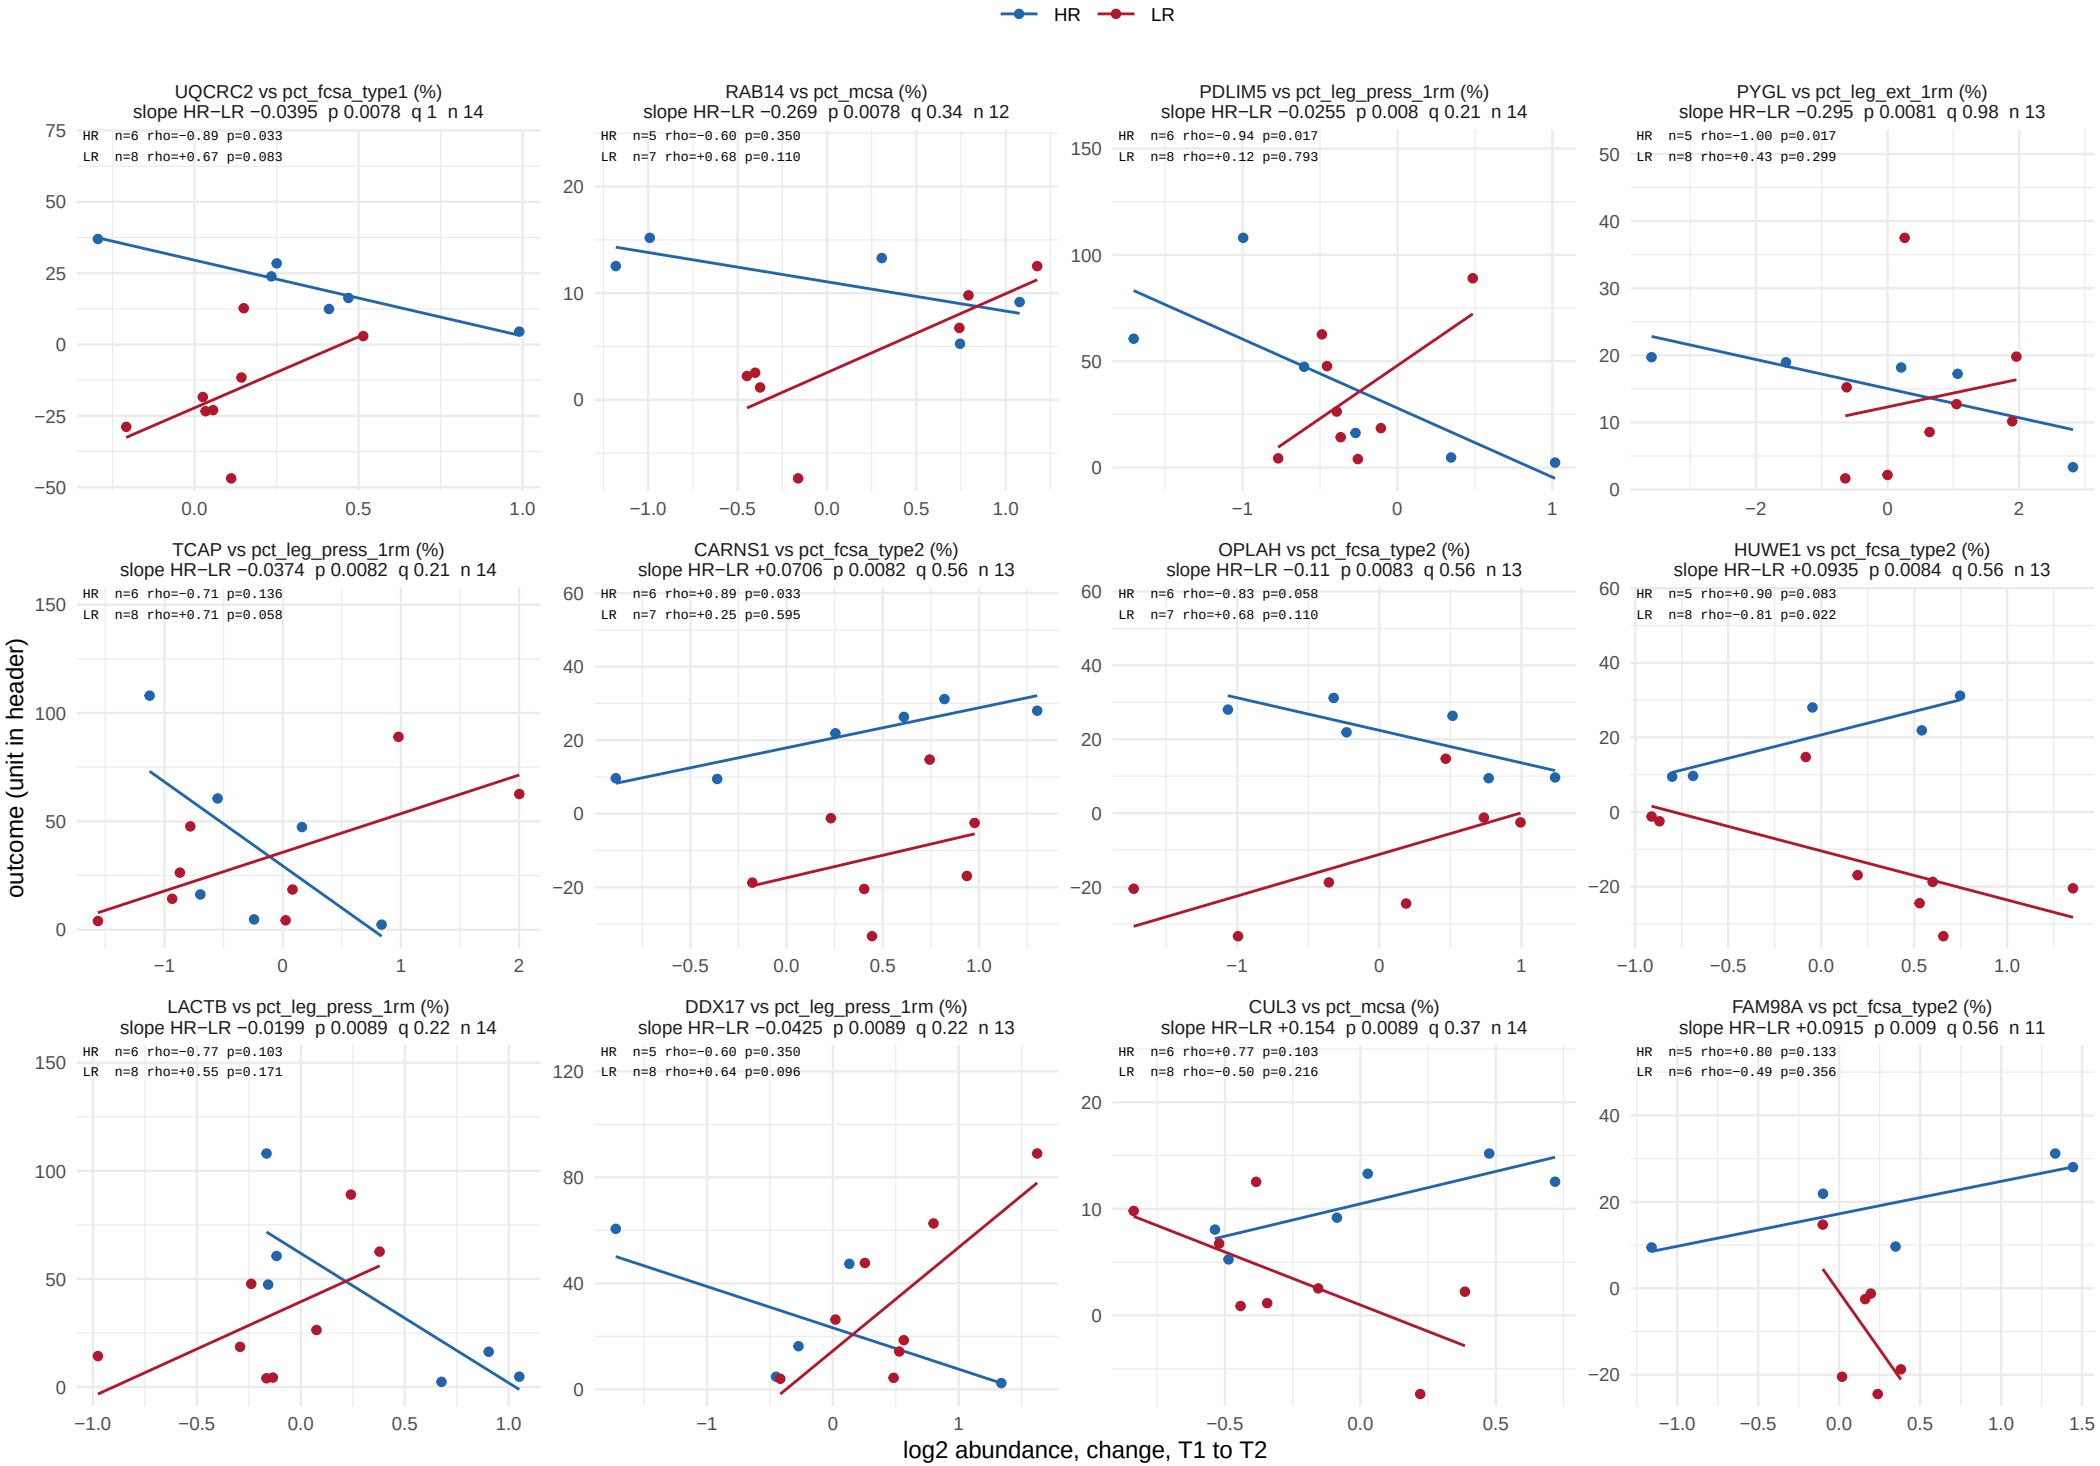

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


444 of 8450 feature−outcome pairs at p < 0.05, 20 at BH < 0.05. Page 11 of 37.

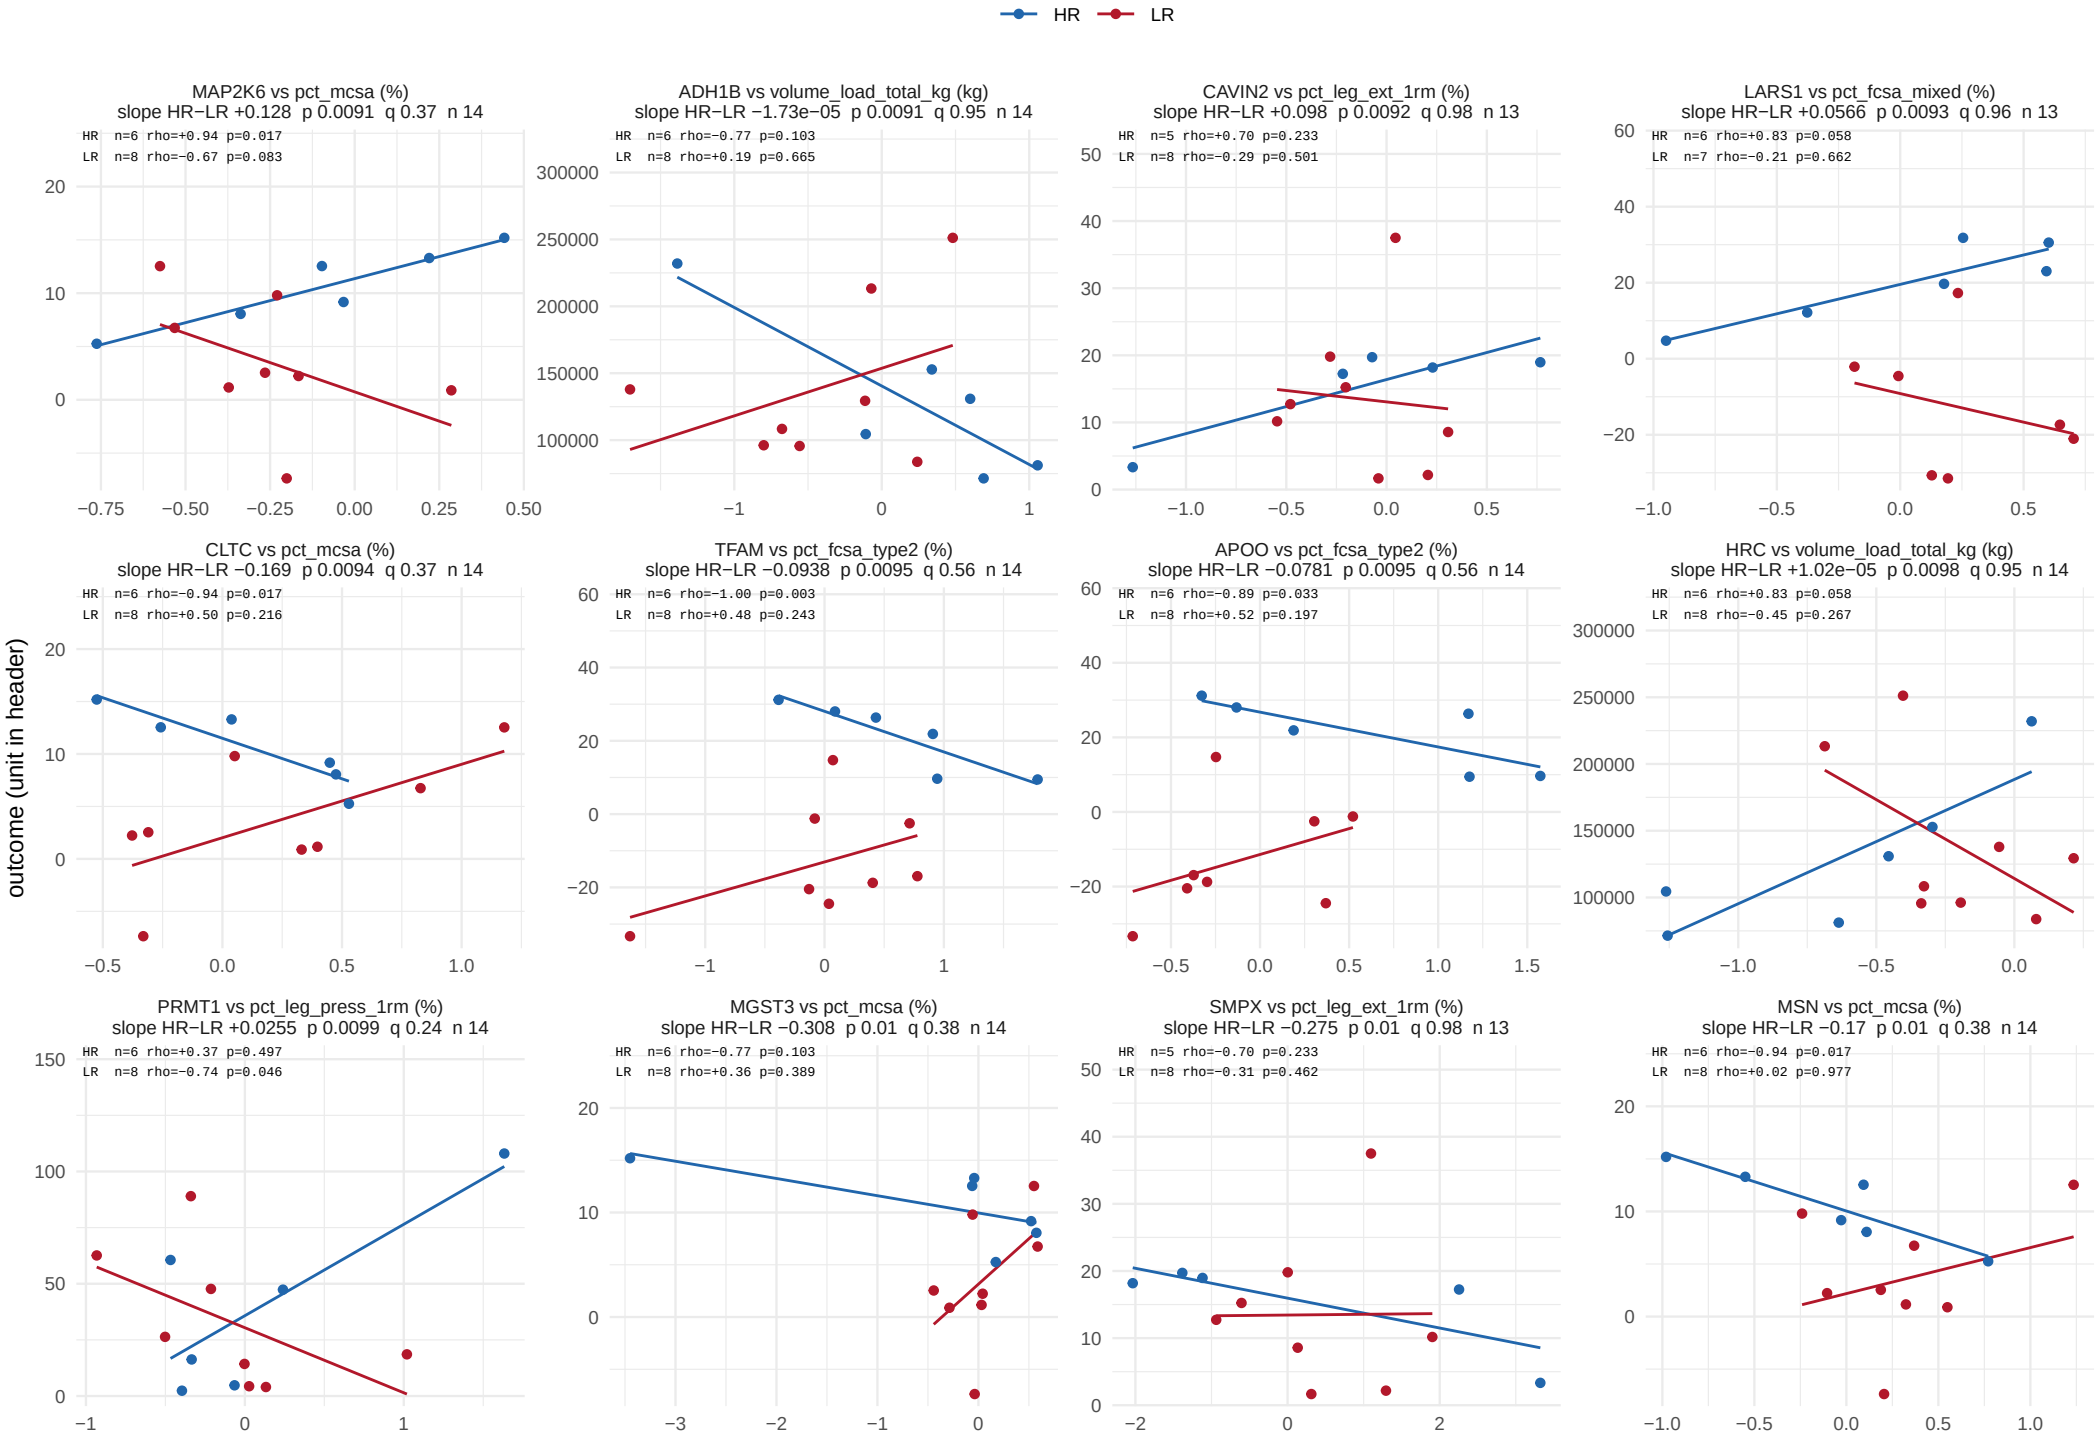

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


444 of 8450 feature−outcome pairs at p < 0.05, 20 at BH < 0.05. Page 12 of 37.

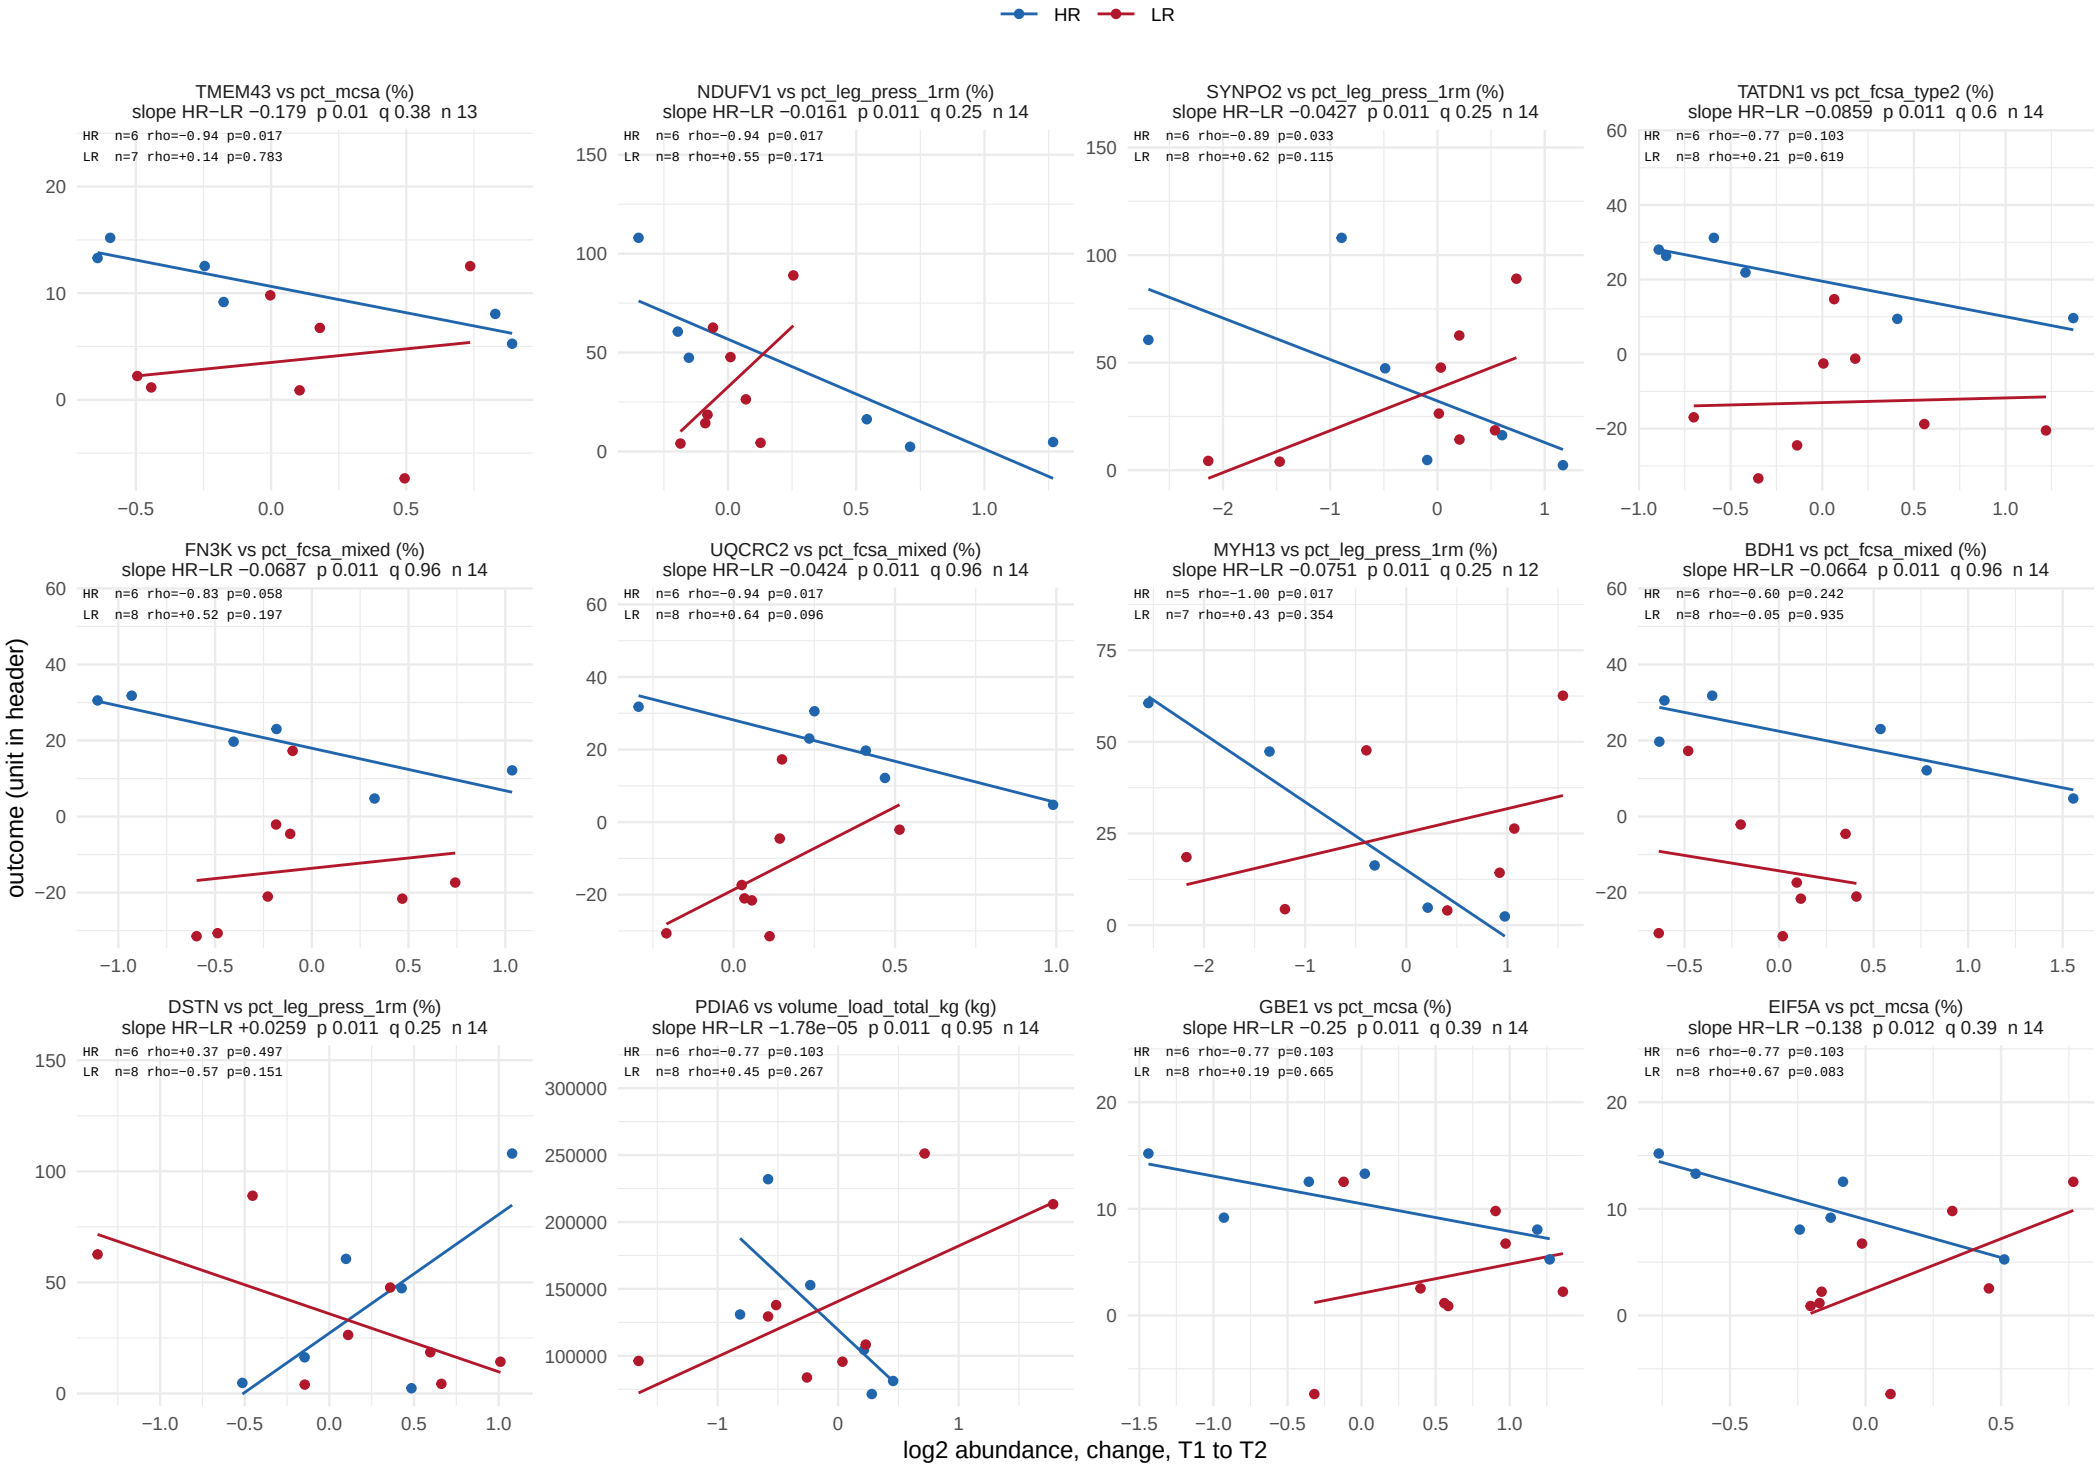

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


444 of 8450 feature−outcome pairs at p < 0.05, 20 at BH < 0.05. Page 13 of 37.

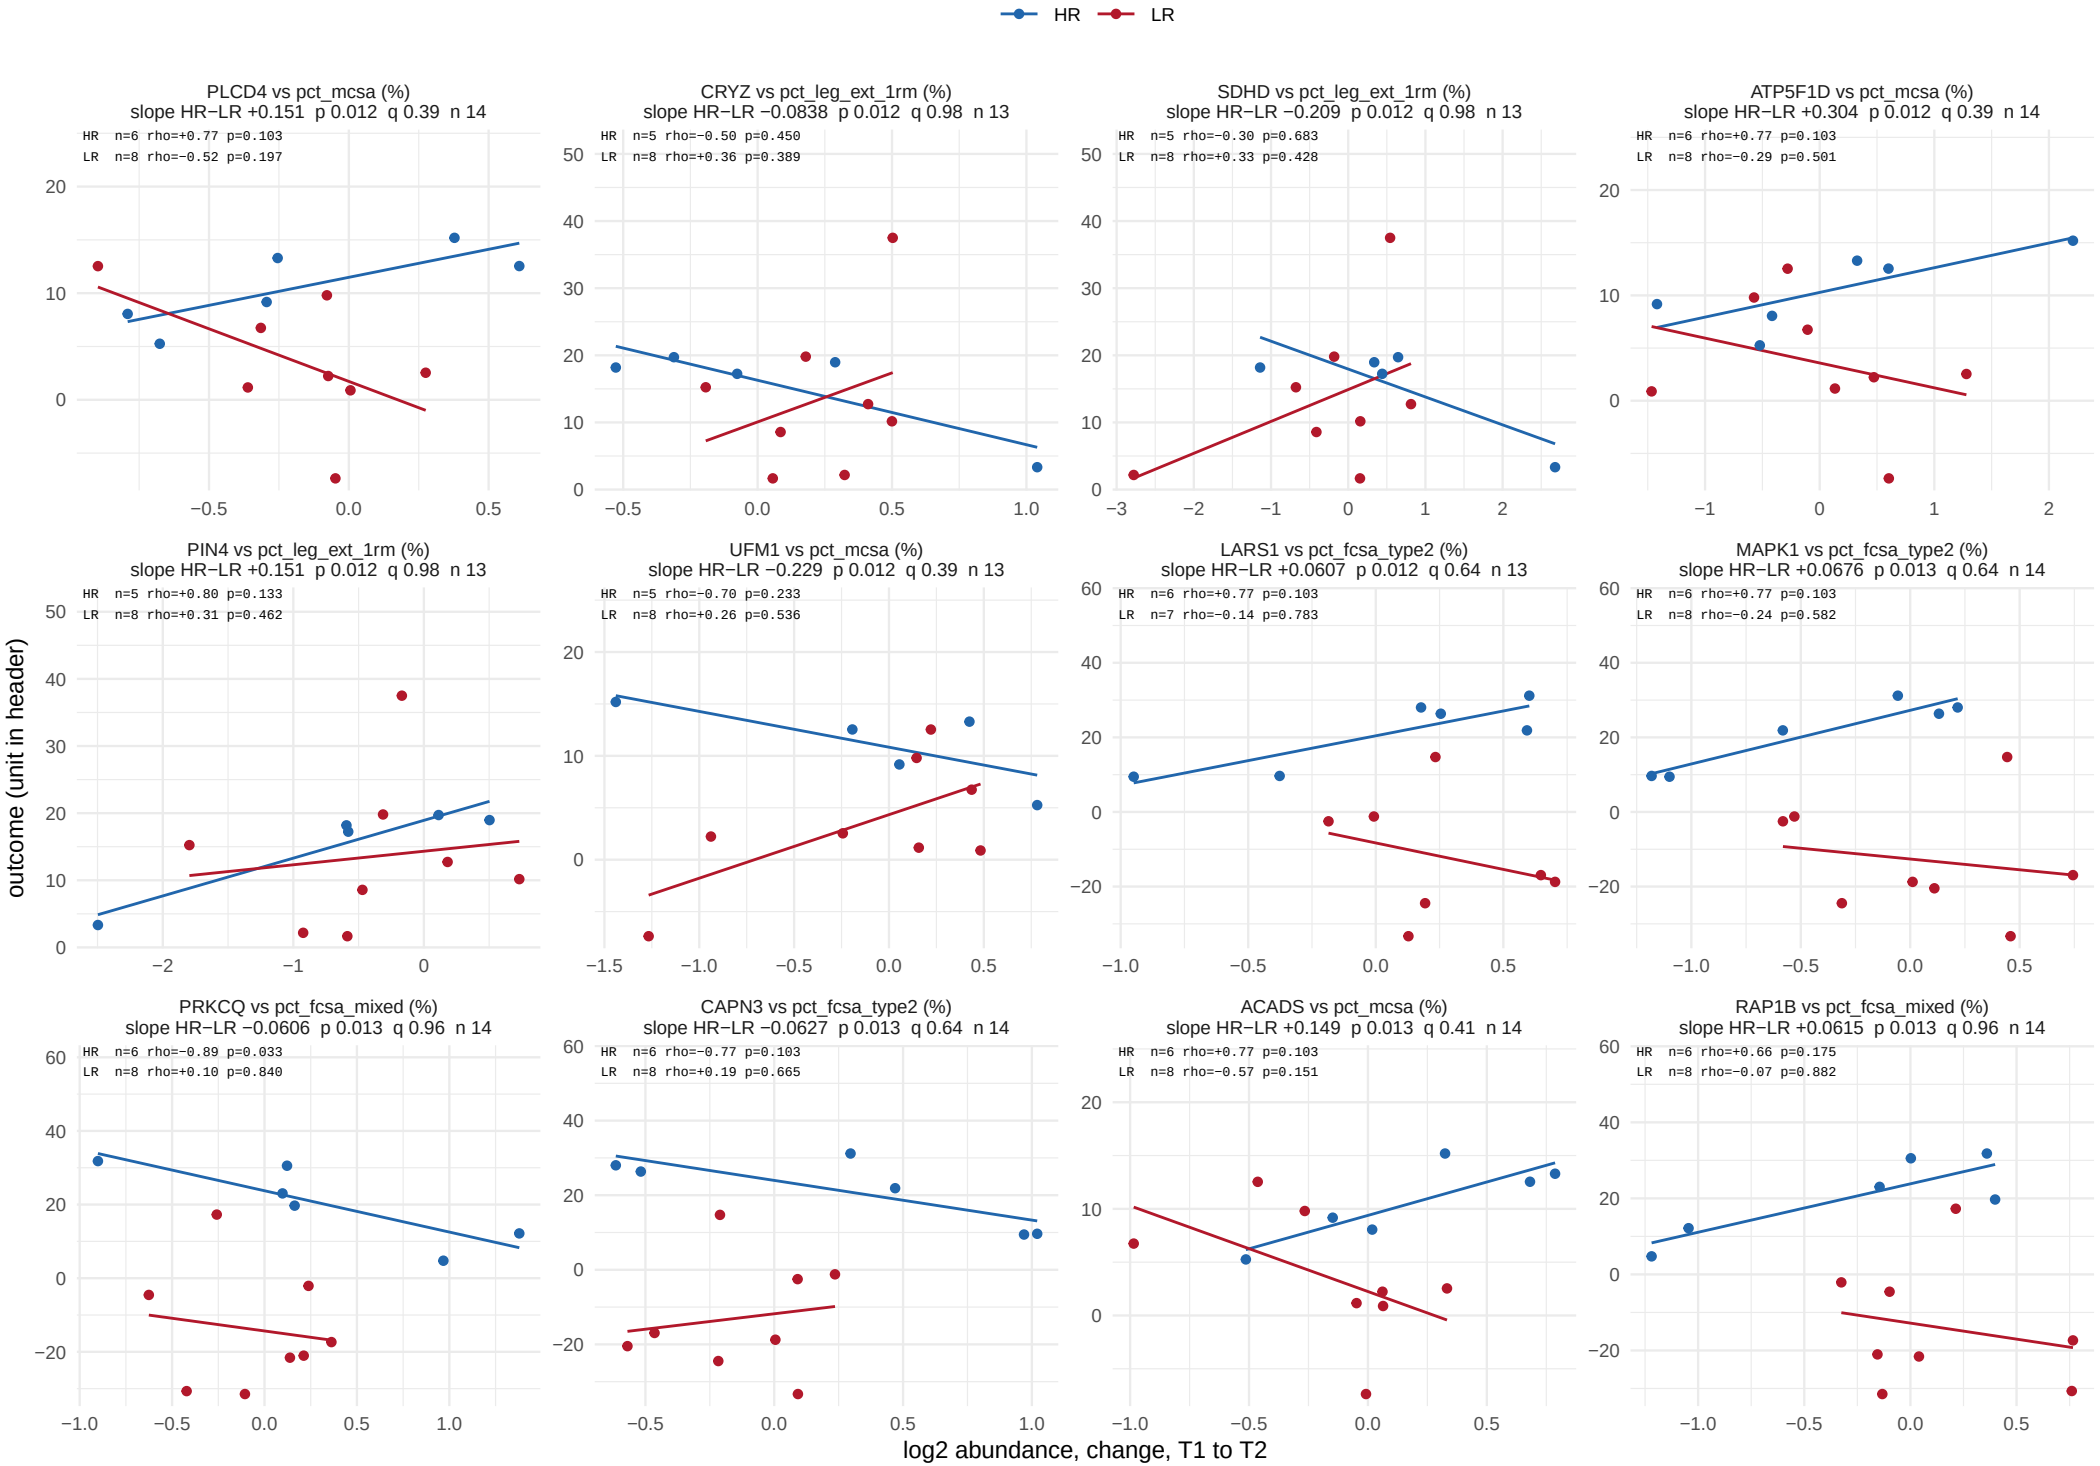

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


444 of 8450 feature−outcome pairs at p < 0.05, 20 at BH < 0.05. Page 14 of 37.

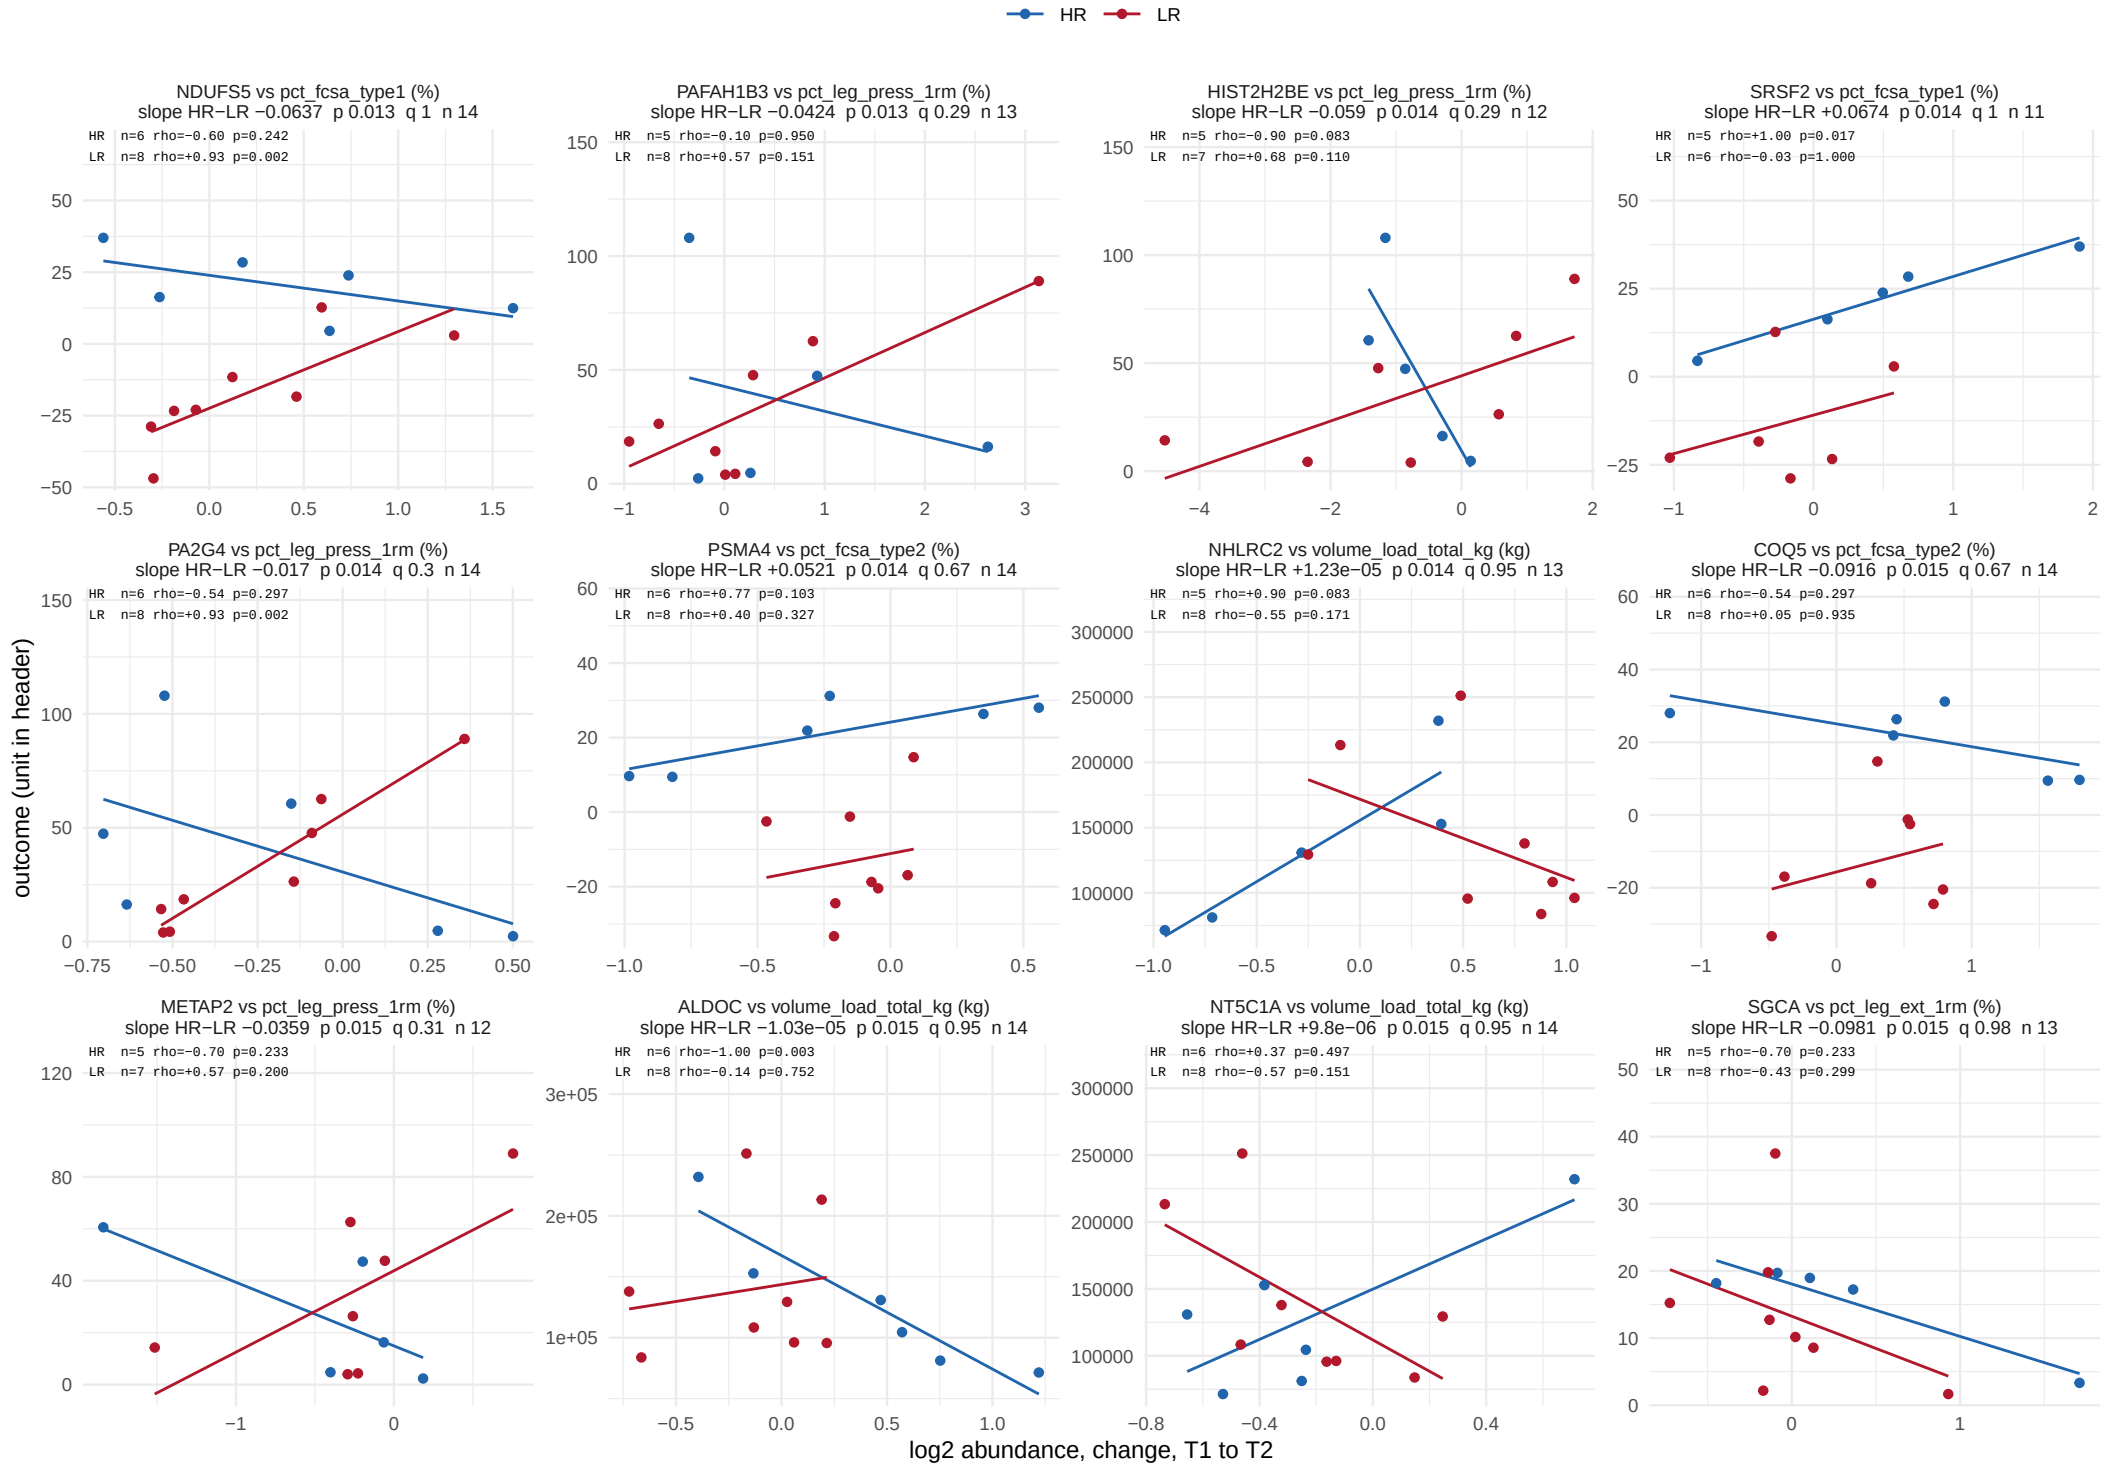

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


444 of 8450 feature−outcome pairs at p < 0.05, 20 at BH < 0.05. Page 15 of 37.

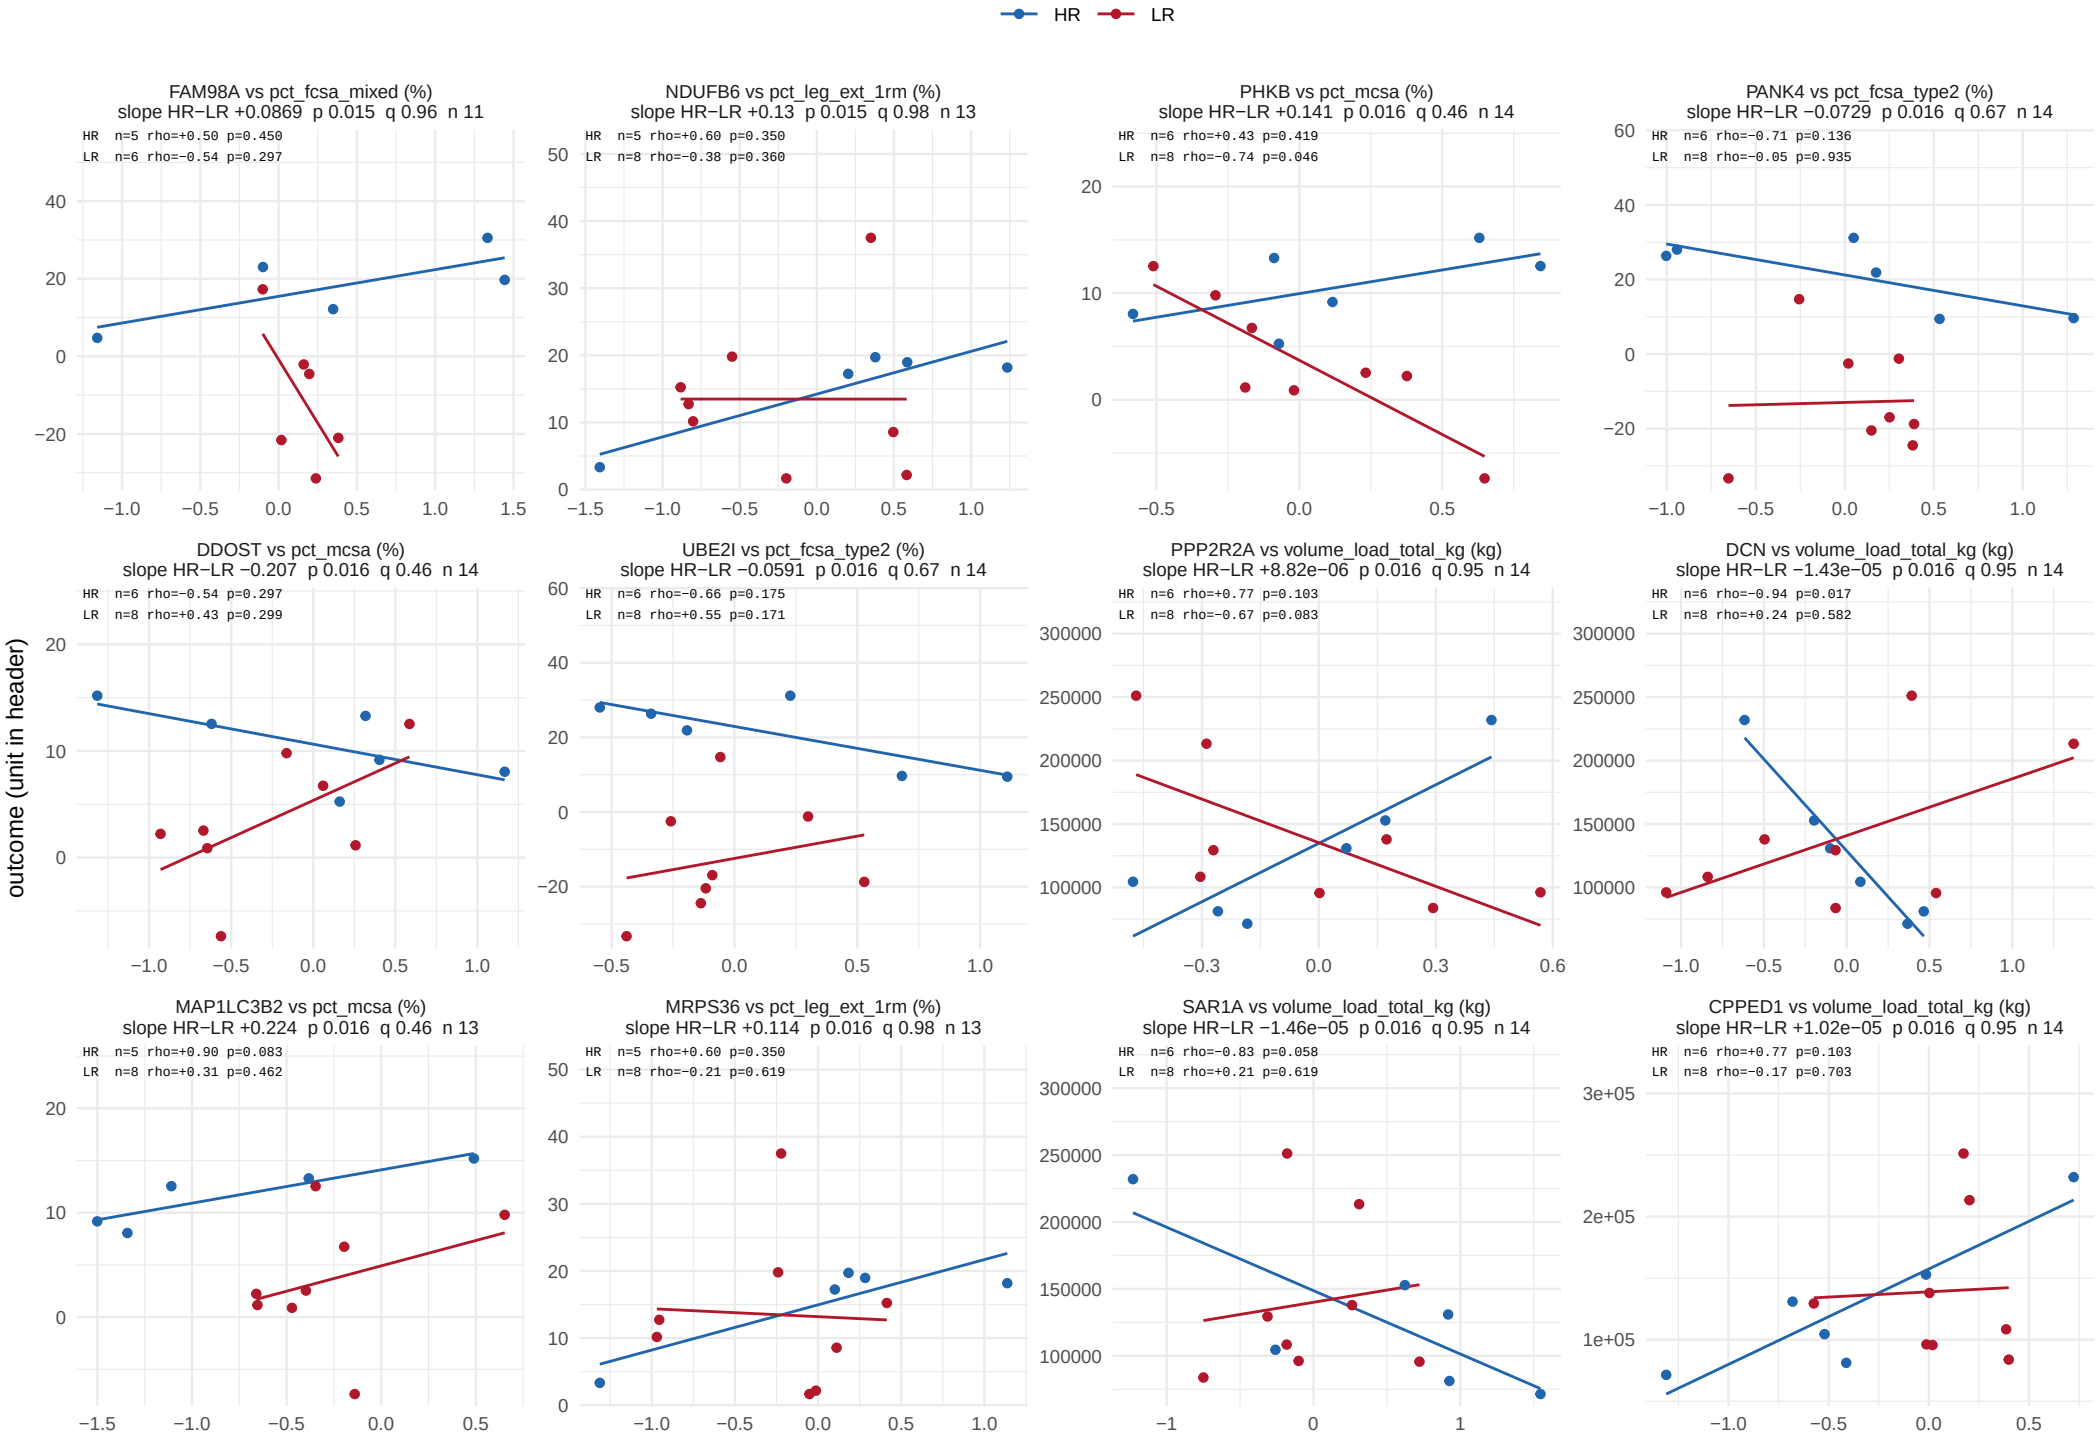

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


444 of 8450 feature−outcome pairs at p < 0.05, 20 at BH < 0.05. Page 16 of 37.

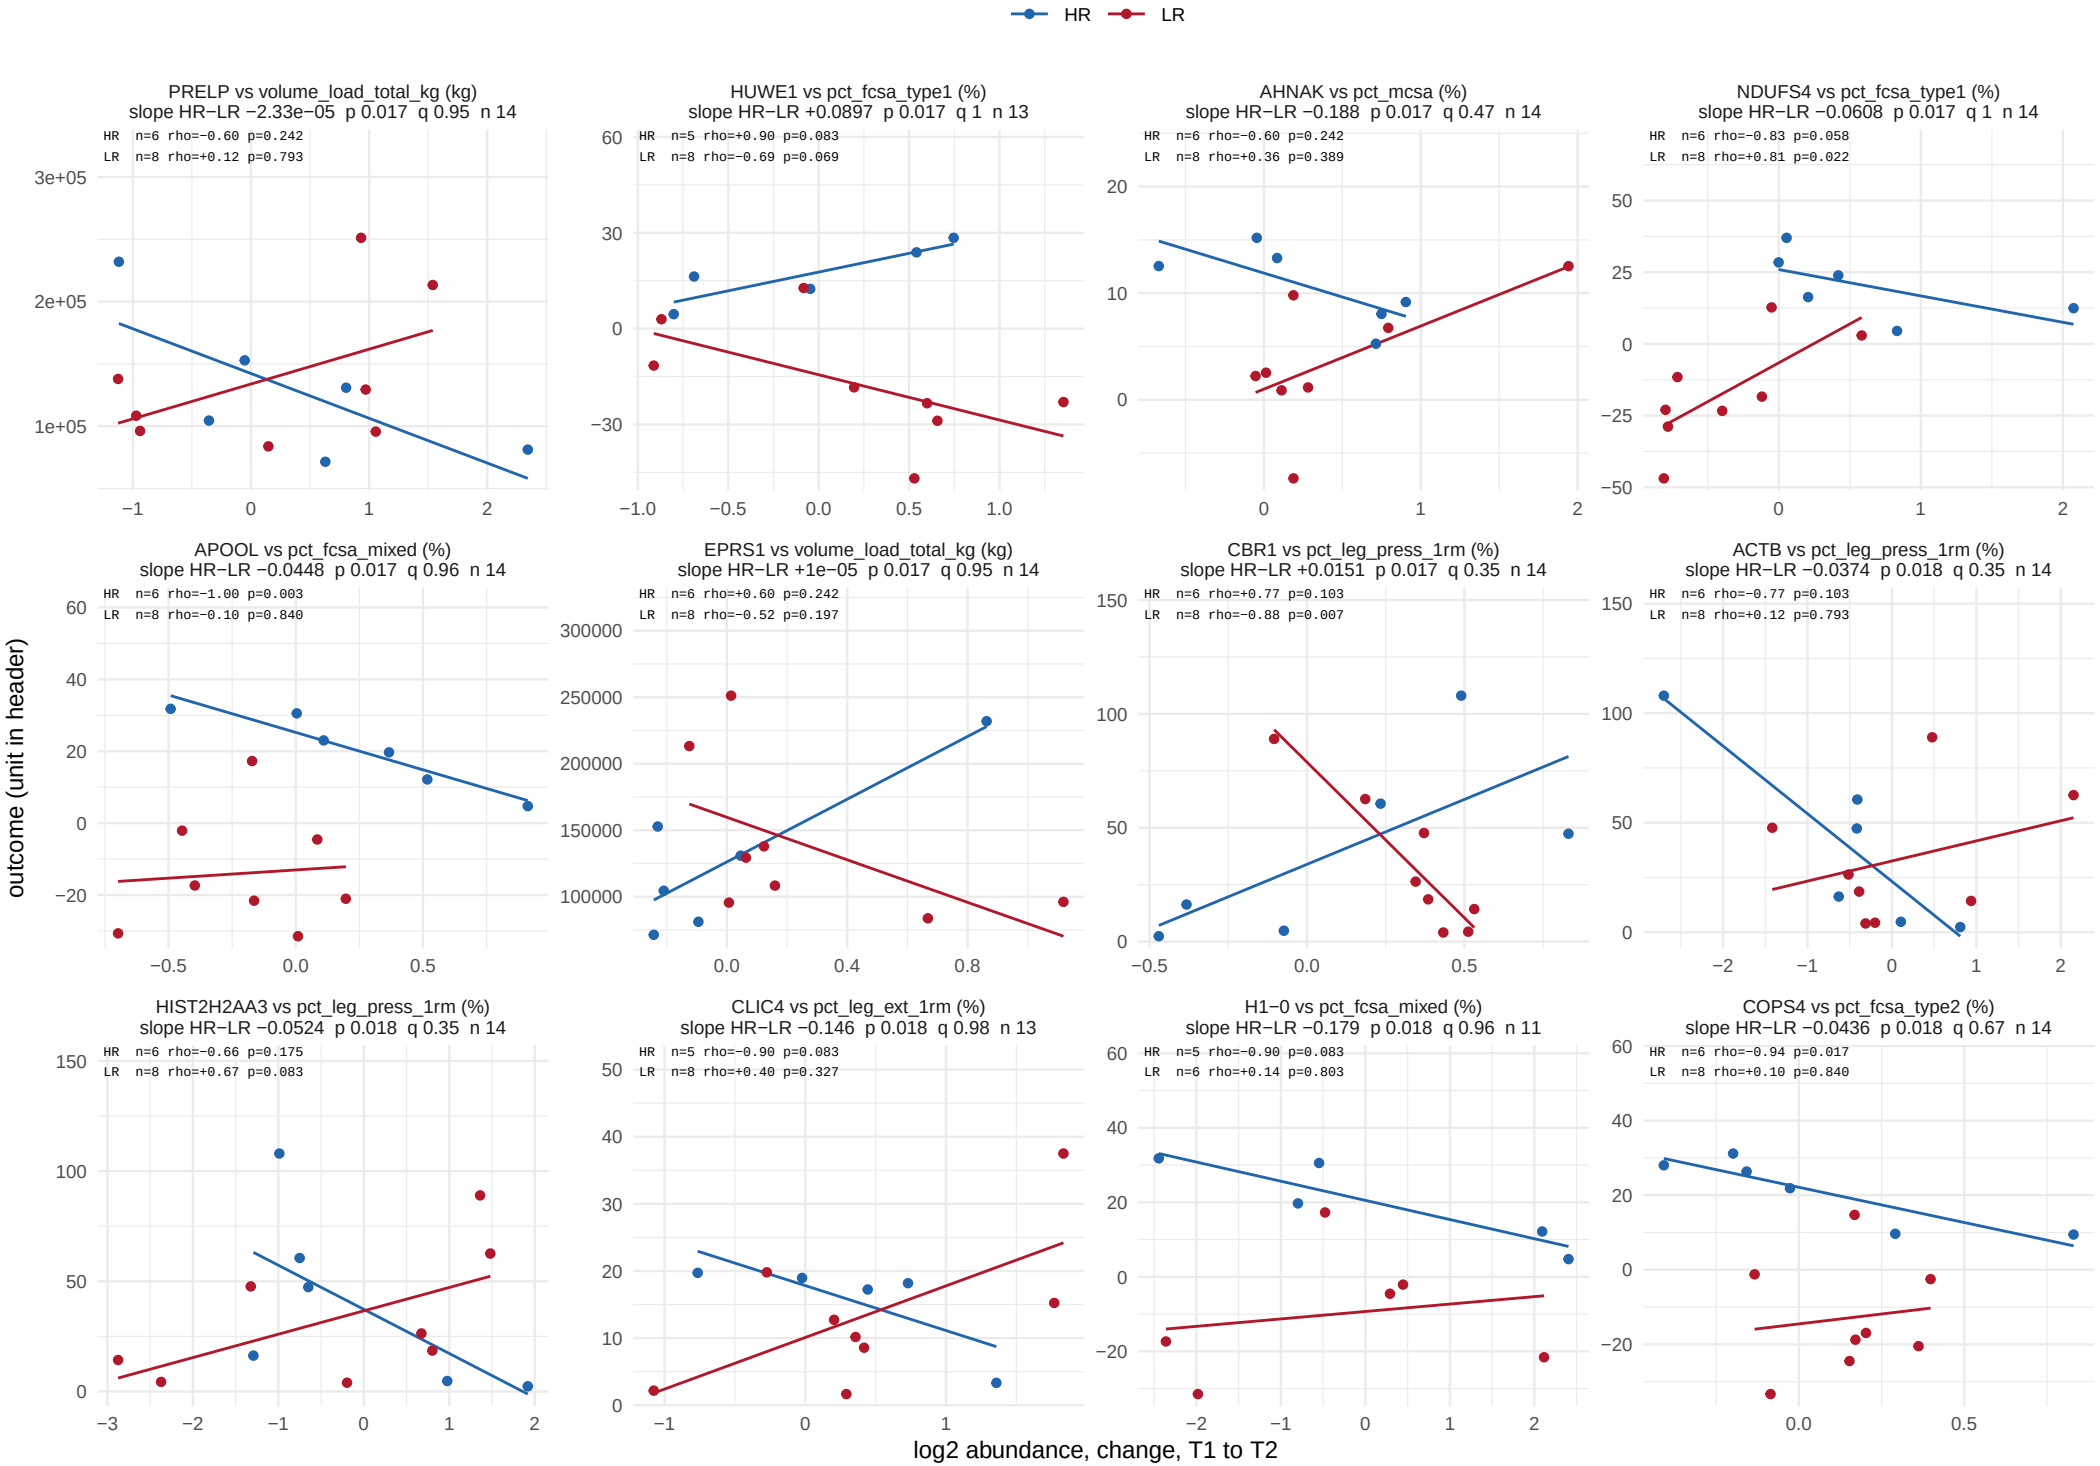

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


444 of 8450 feature−outcome pairs at p < 0.05, 20 at BH < 0.05. Page 17 of 37.

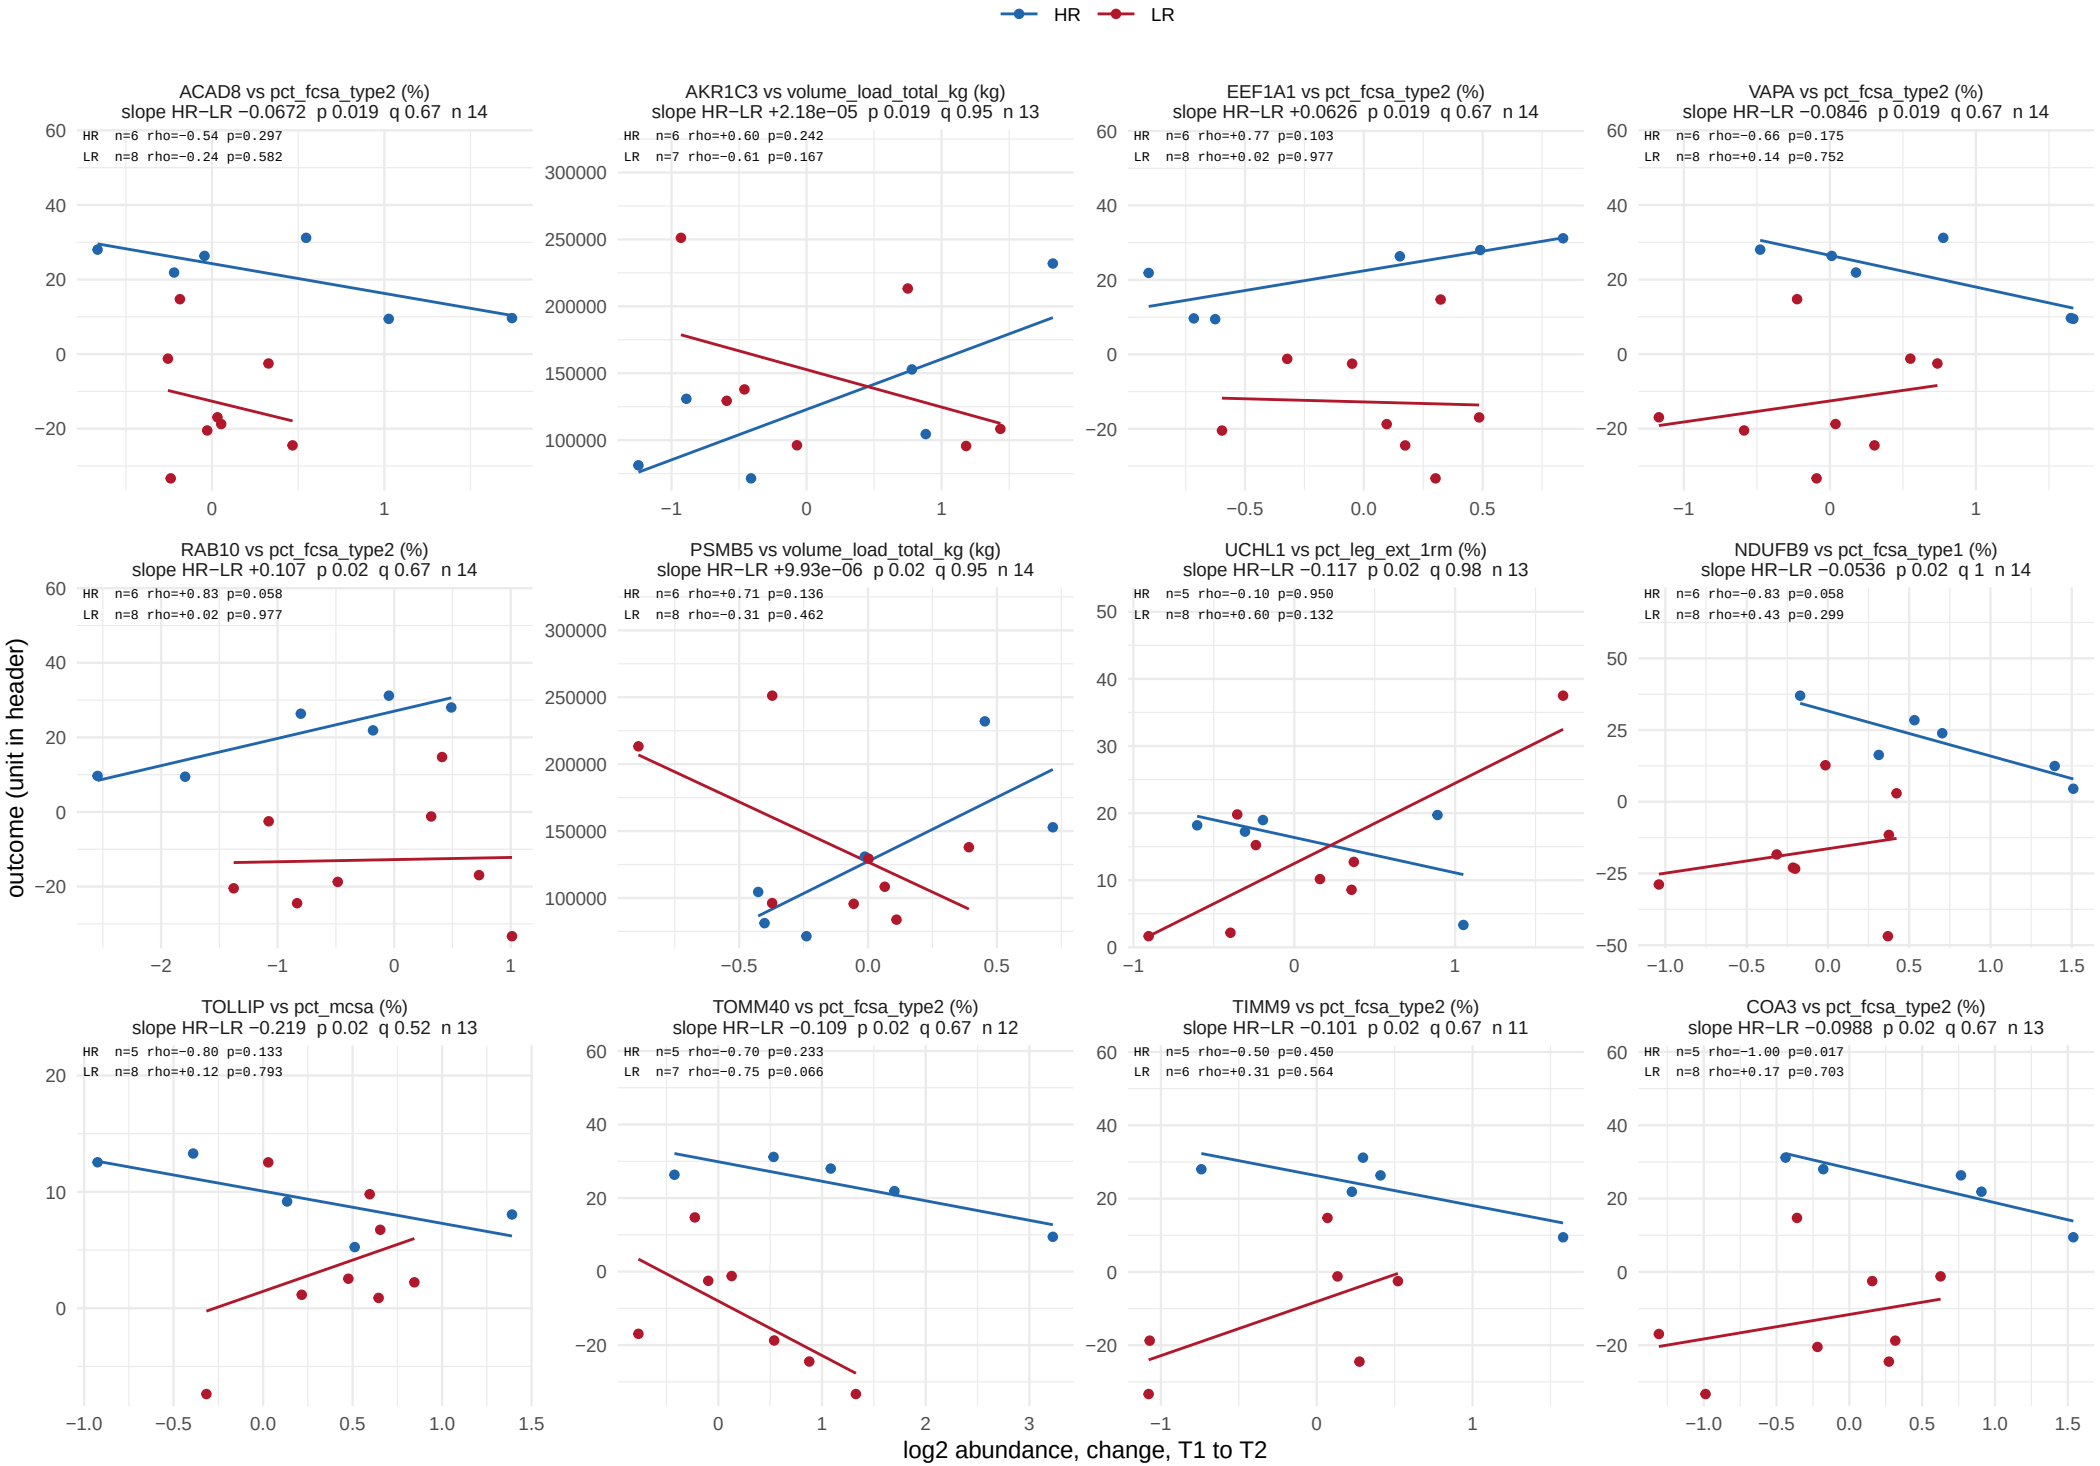

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


444 of 8450 feature−outcome pairs at p < 0.05, 20 at BH < 0.05. Page 18 of 37.

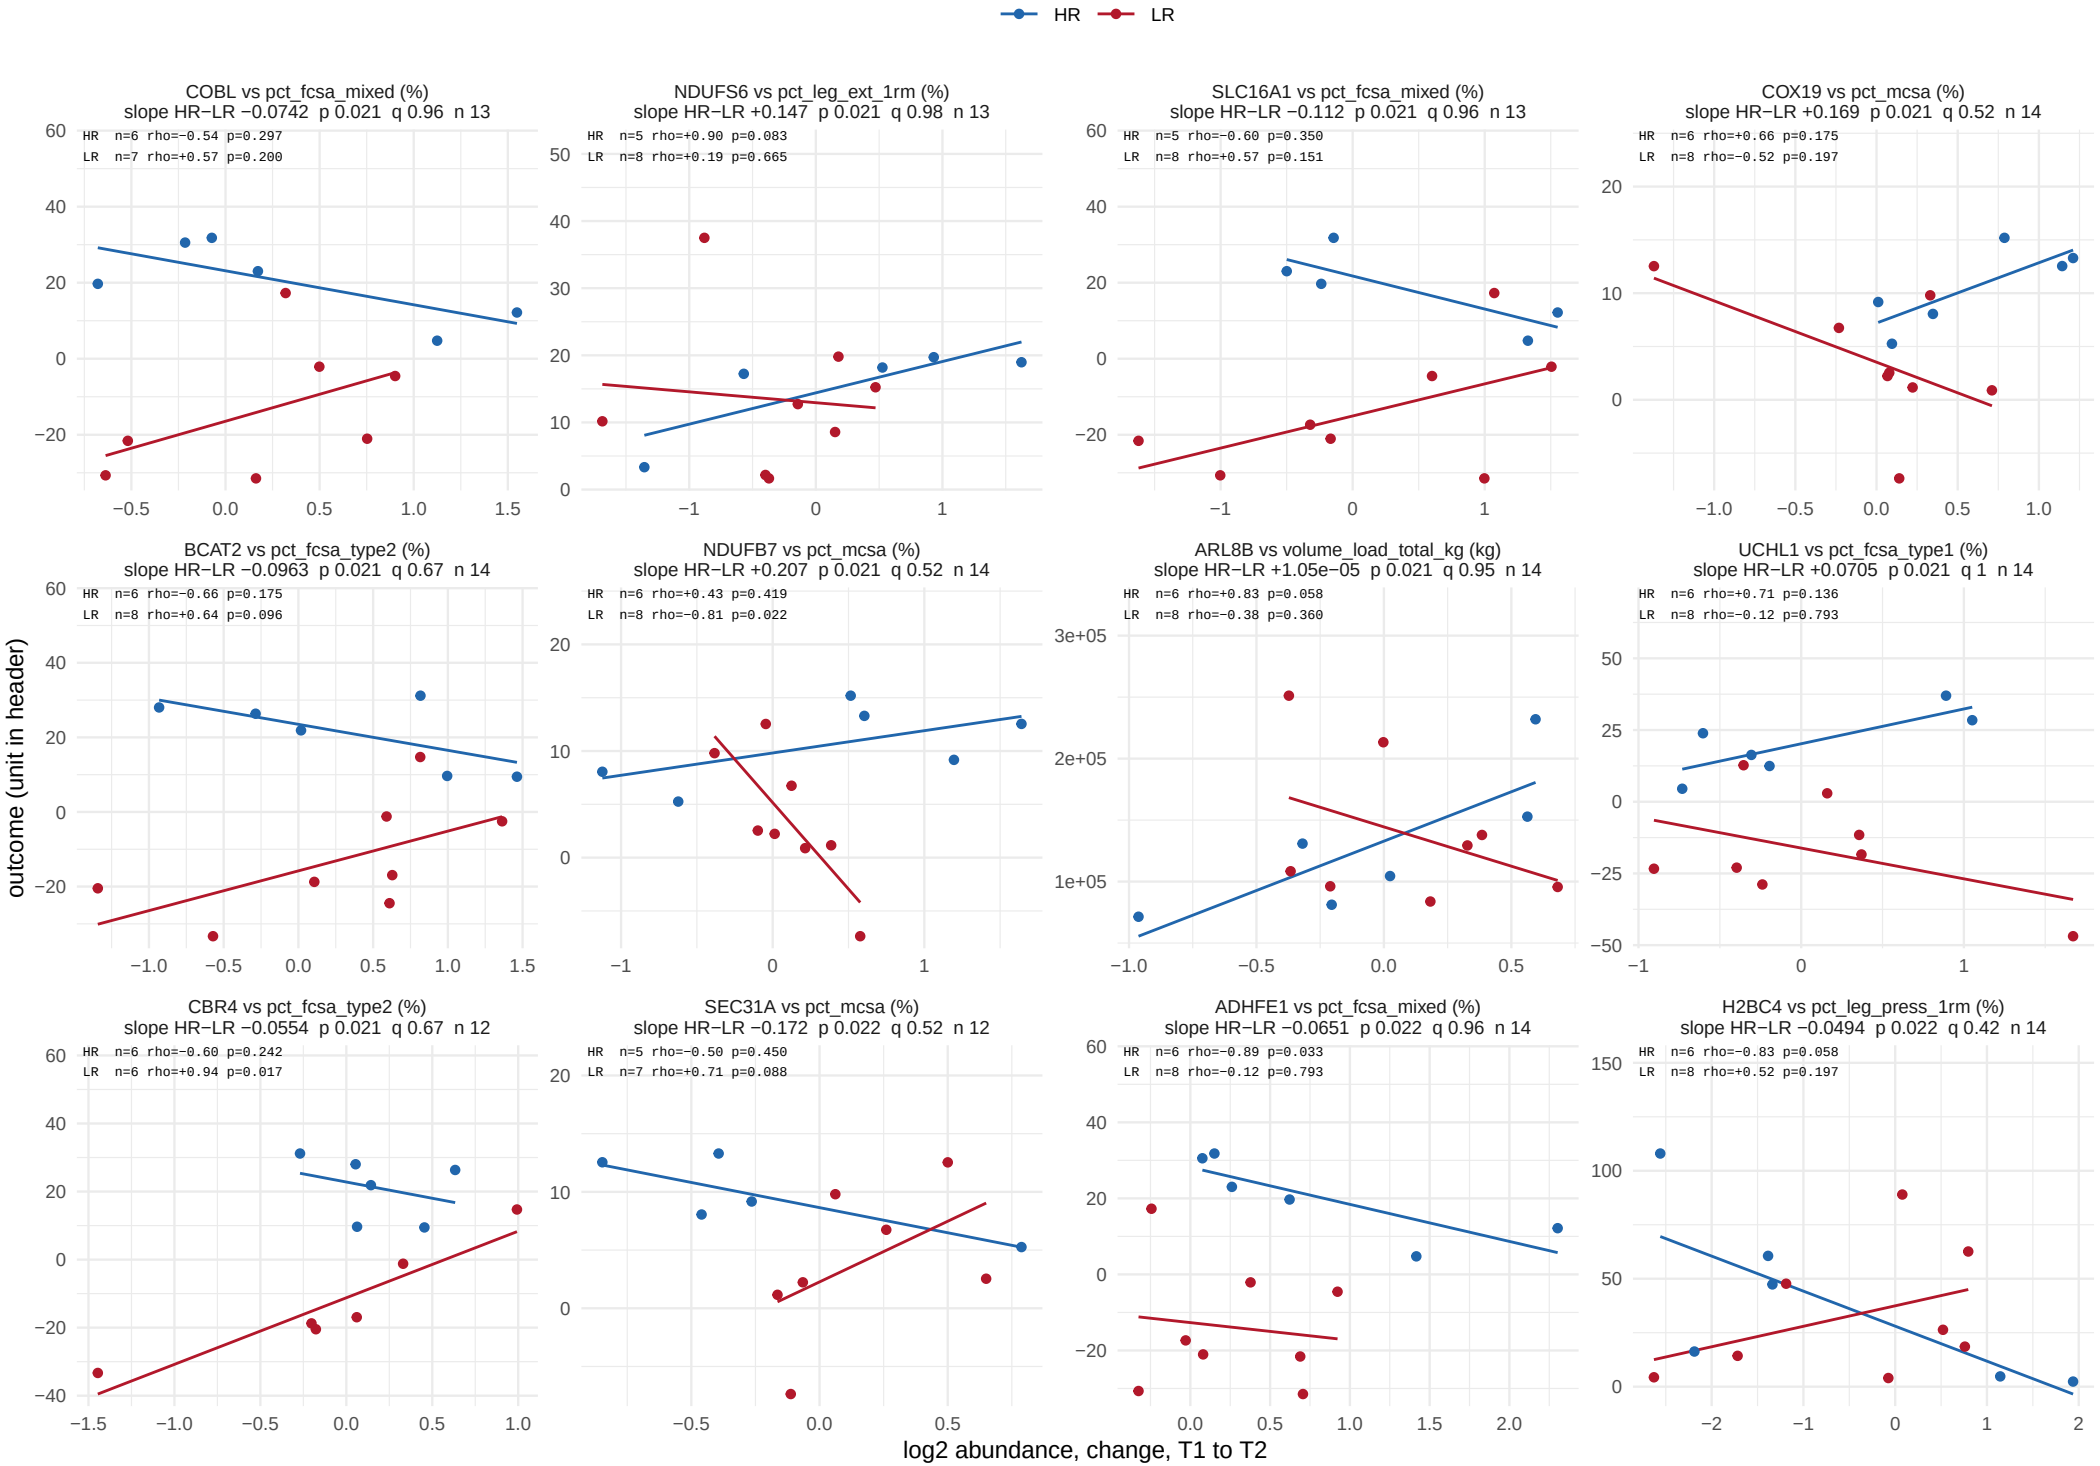

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


444 of 8450 feature−outcome pairs at p < 0.05, 20 at BH < 0.05. Page 19 of 37.

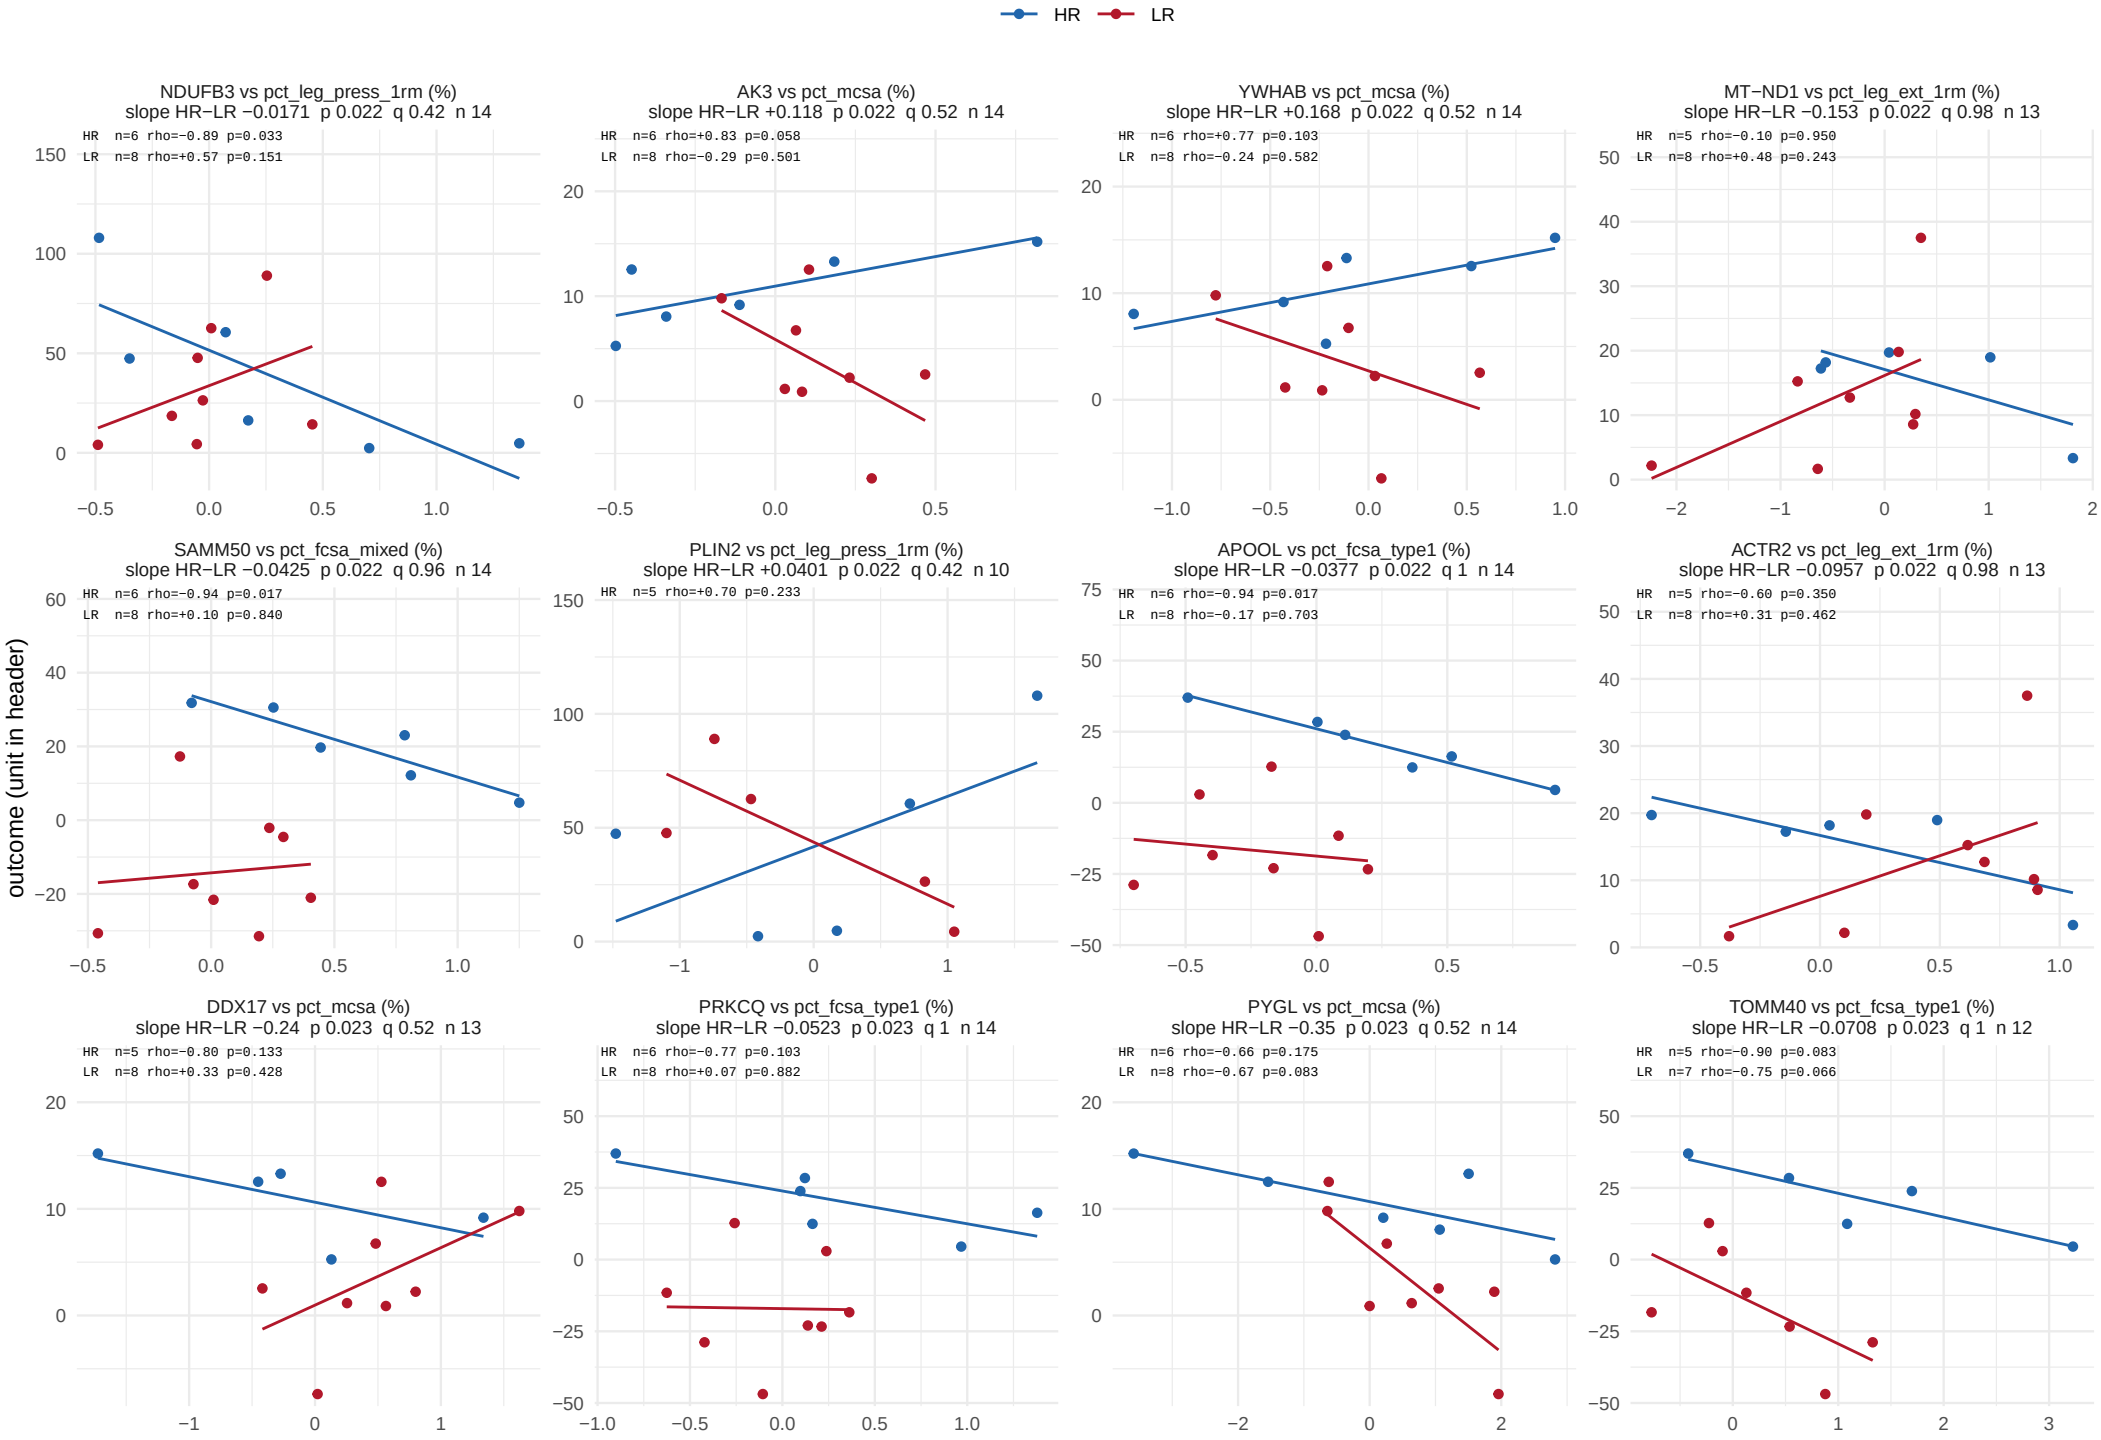

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


444 of 8450 feature−outcome pairs at p < 0.05, 20 at BH < 0.05. Page 20 of 37.

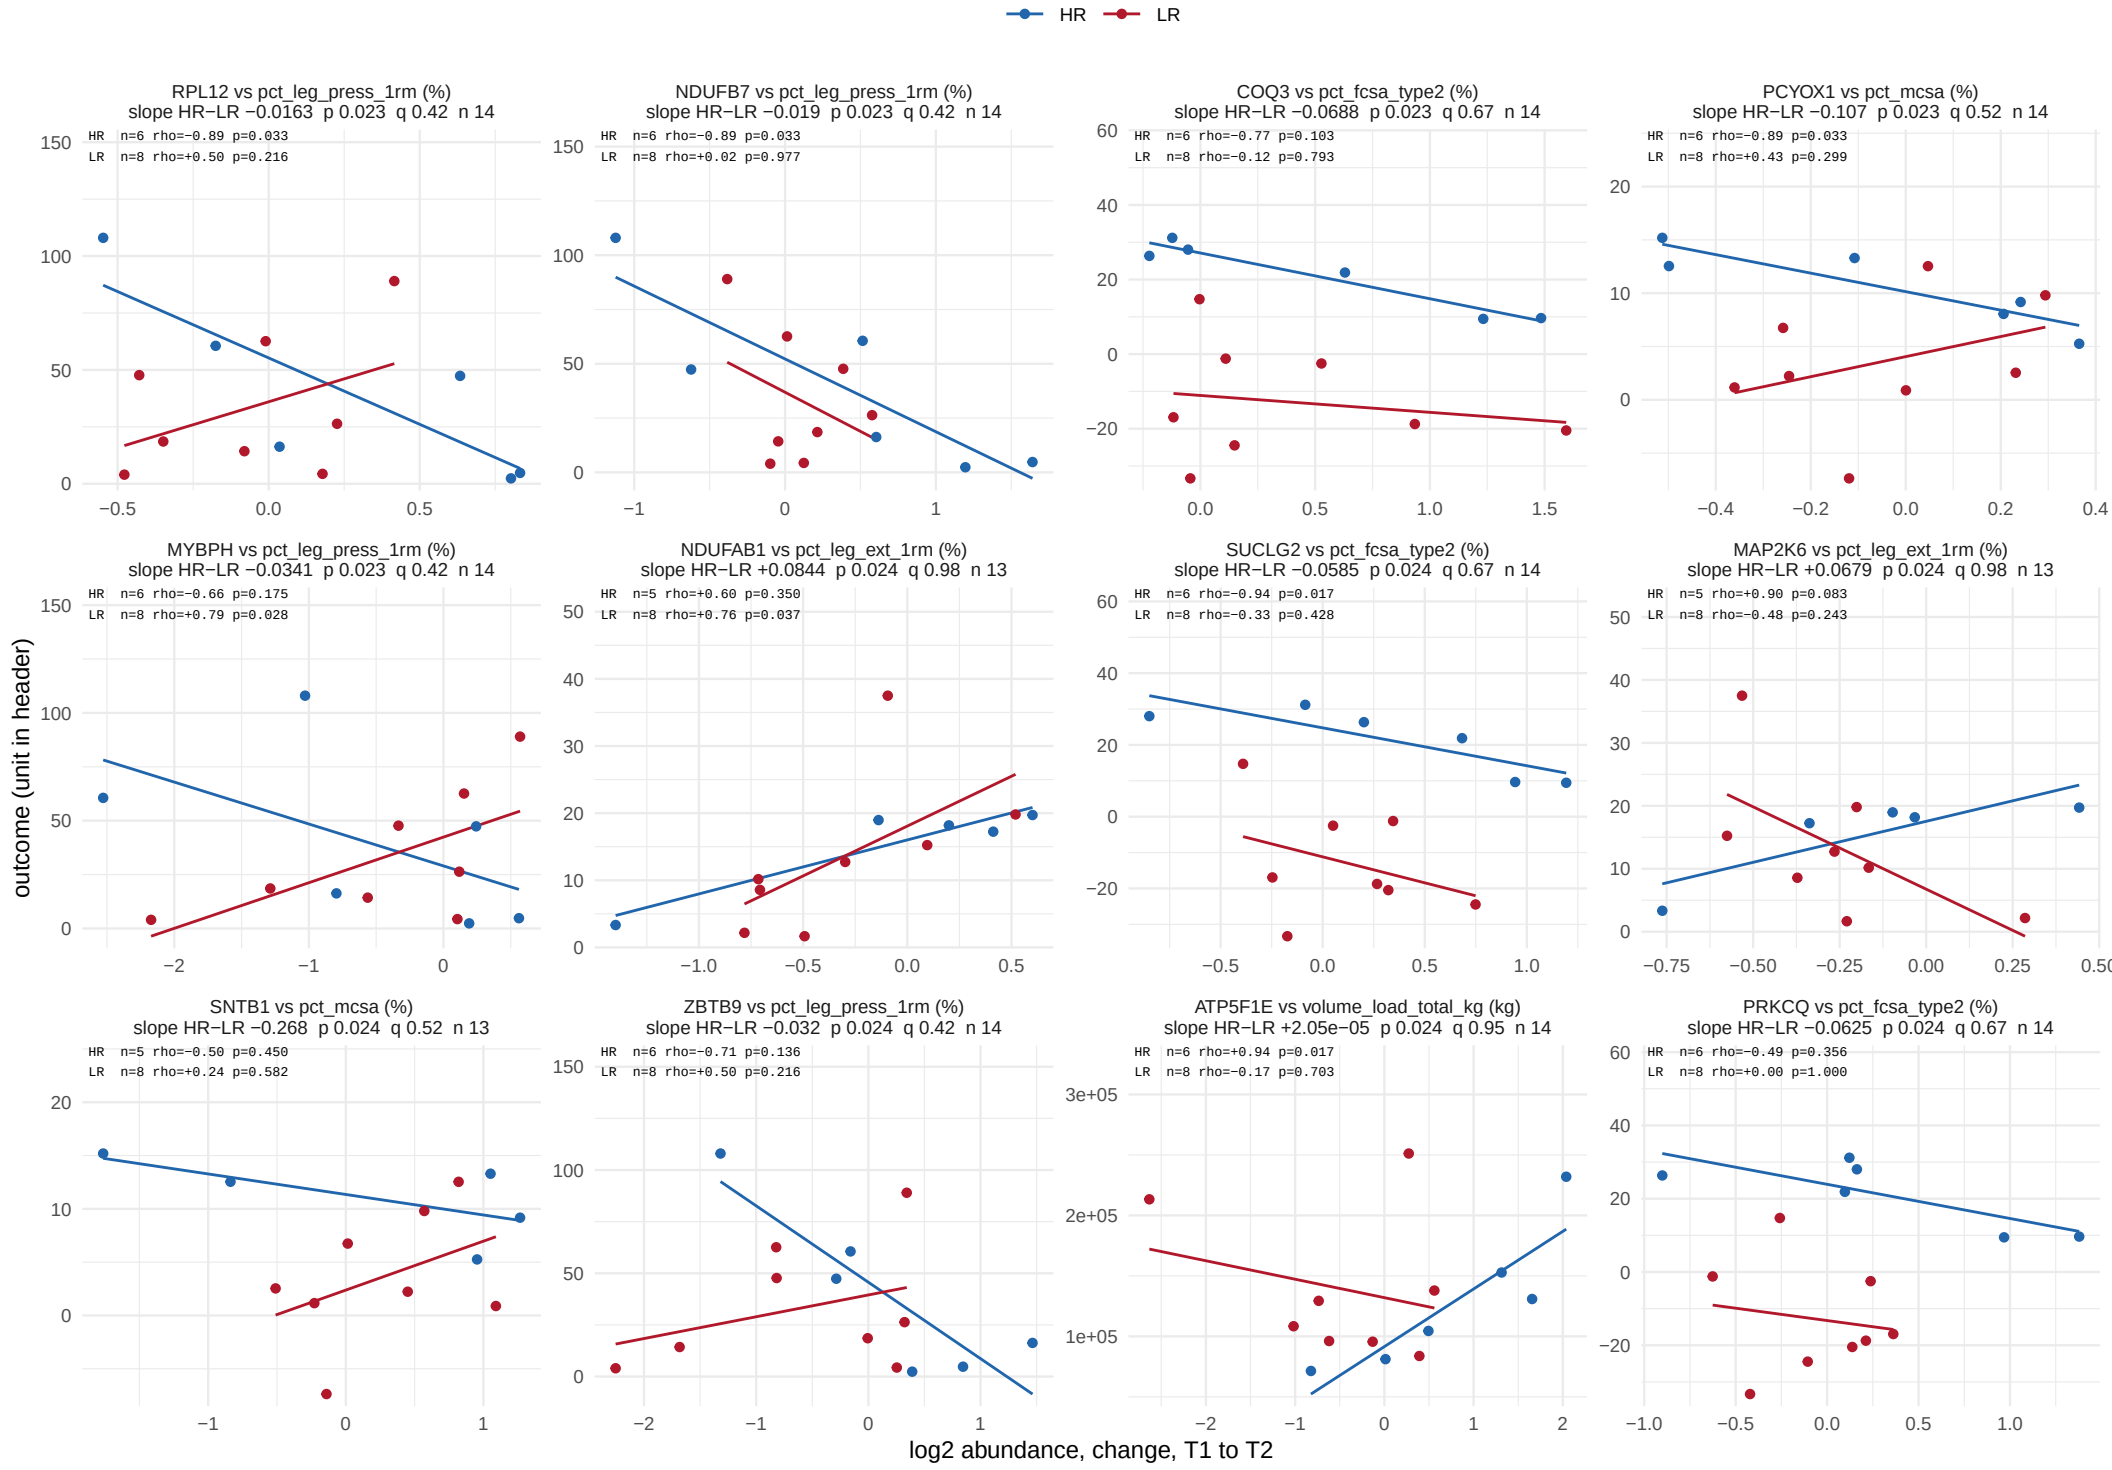

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


444 of 8450 feature−outcome pairs at p < 0.05, 20 at BH < 0.05. Page 21 of 37.

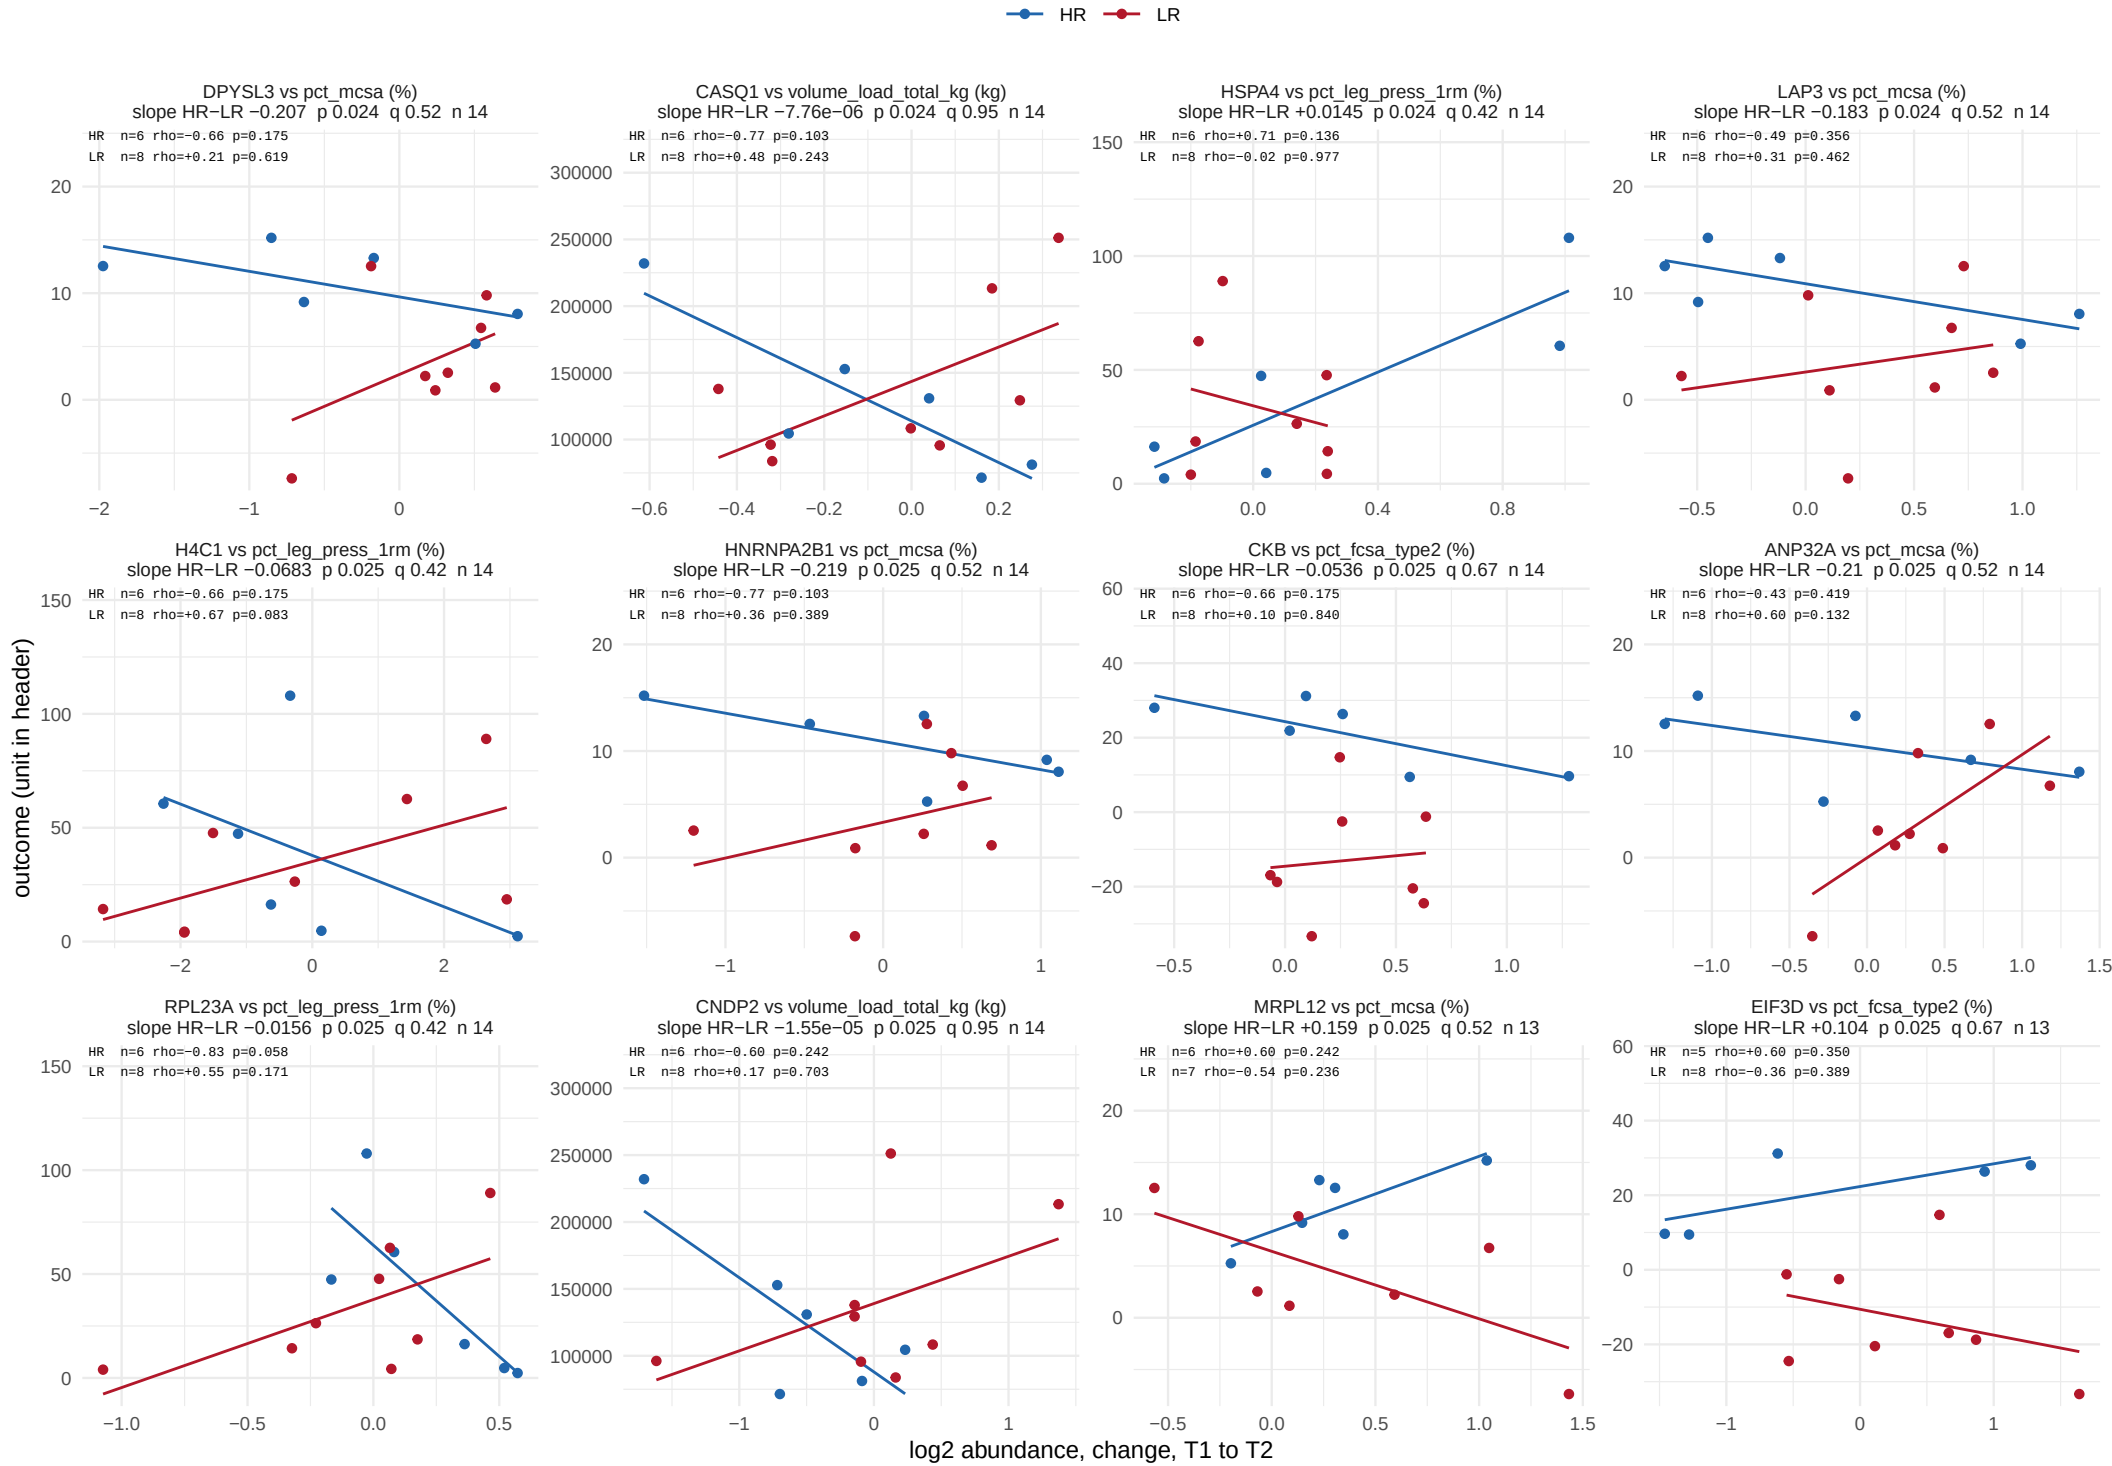

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


444 of 8450 feature−outcome pairs at p < 0.05, 20 at BH < 0.05. Page 22 of 37.

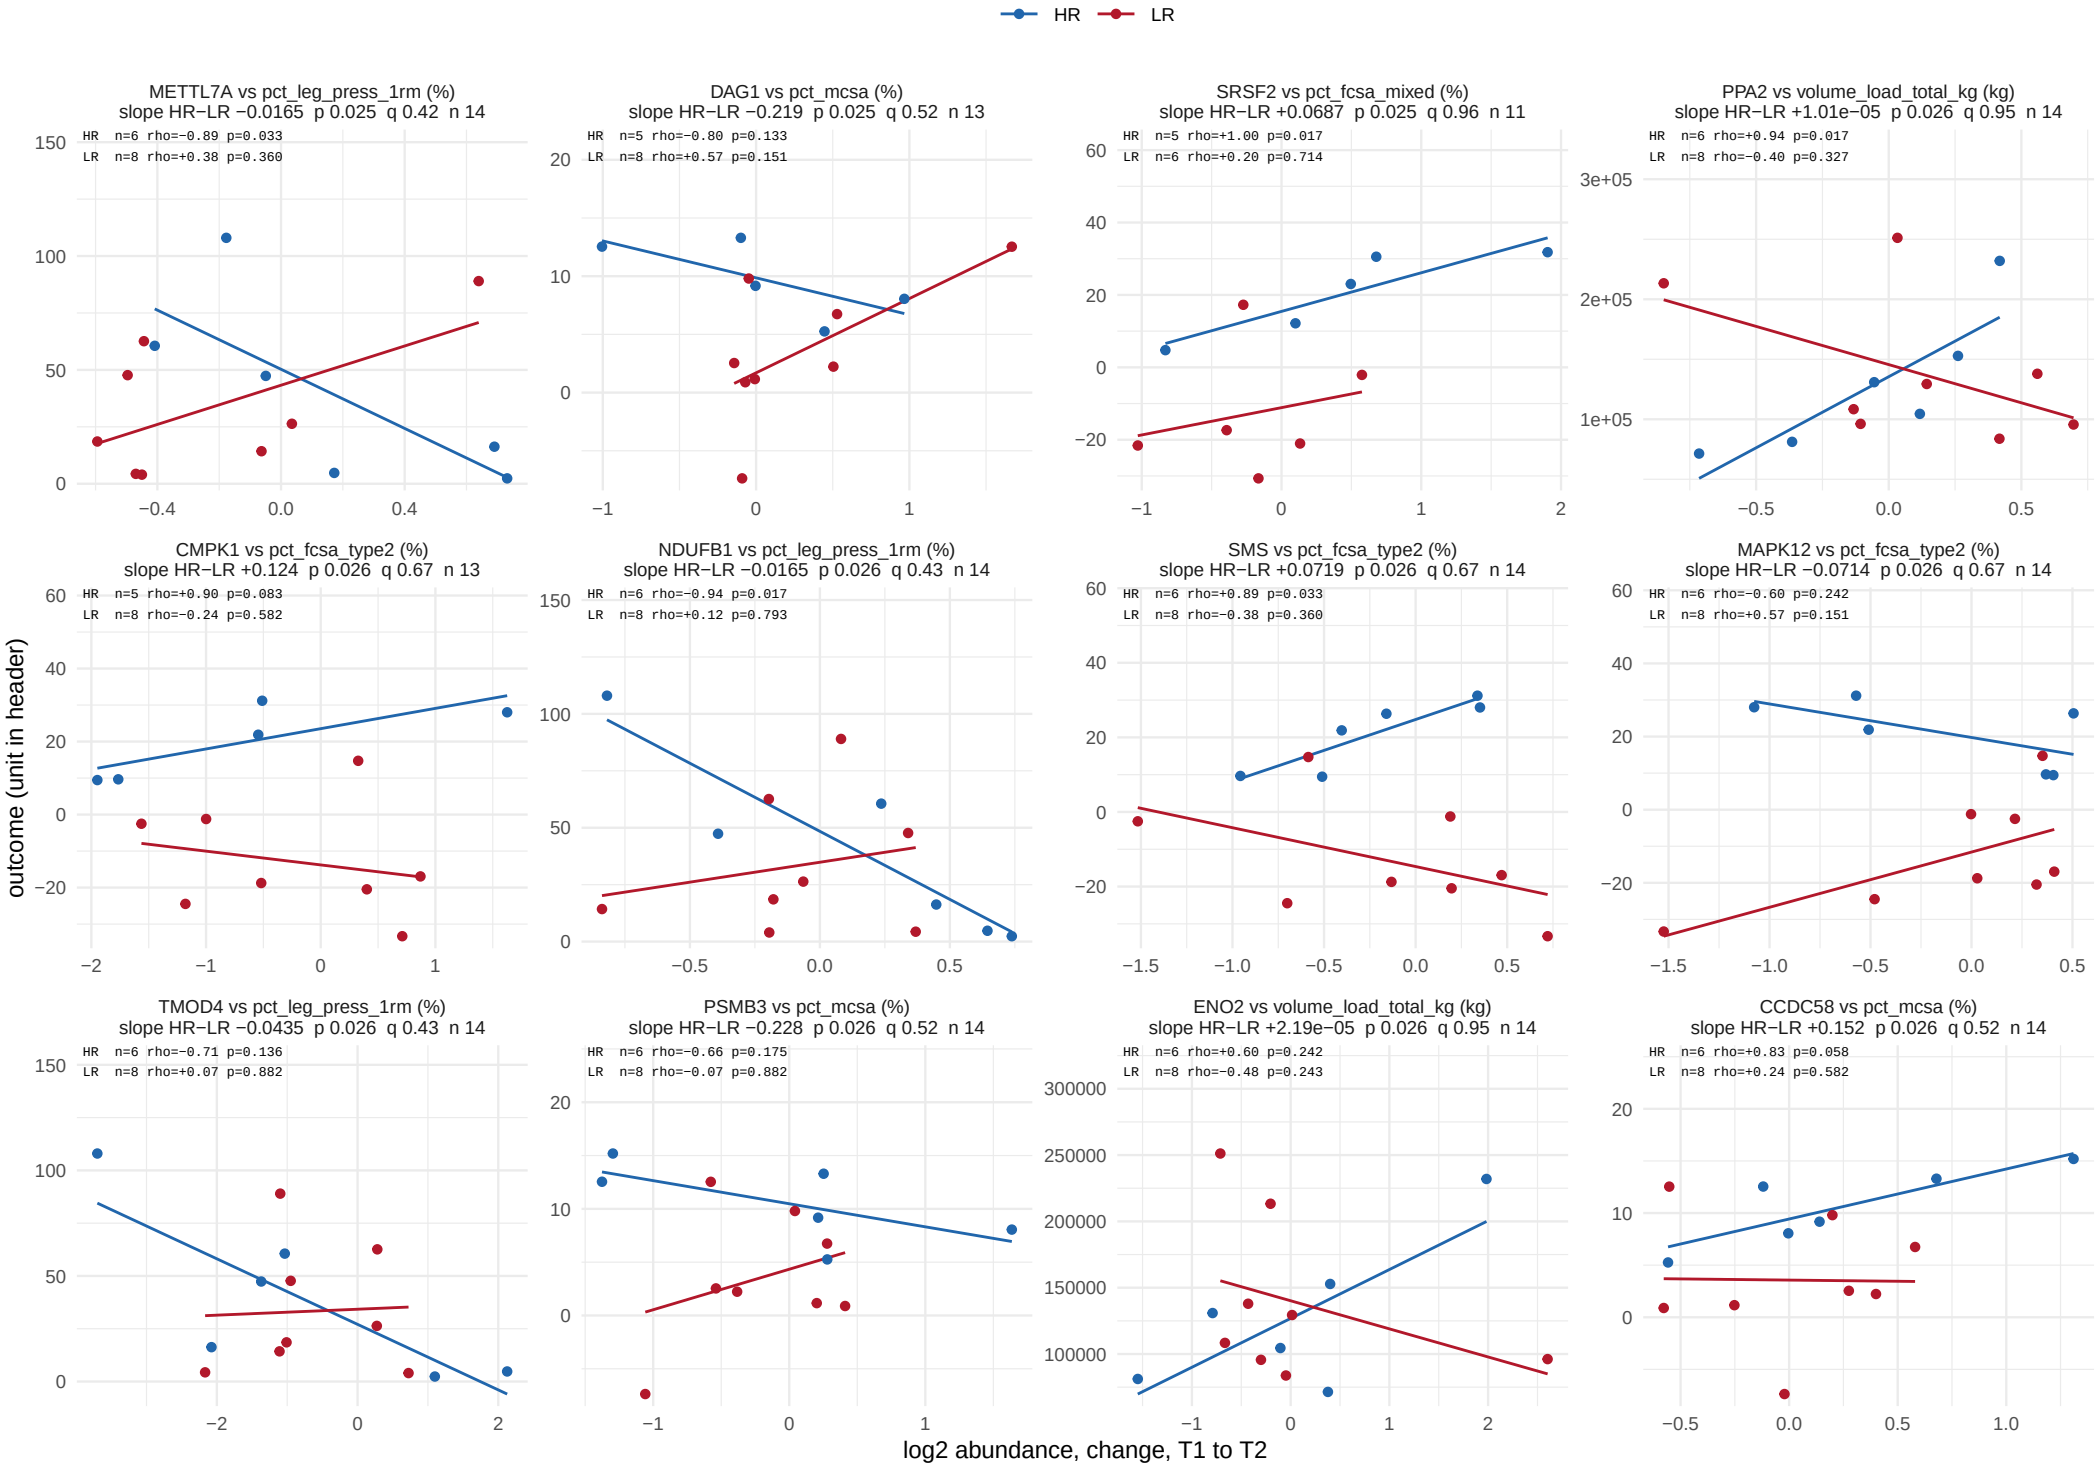

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


444 of 8450 feature−outcome pairs at p < 0.05, 20 at BH < 0.05. Page 23 of 37.

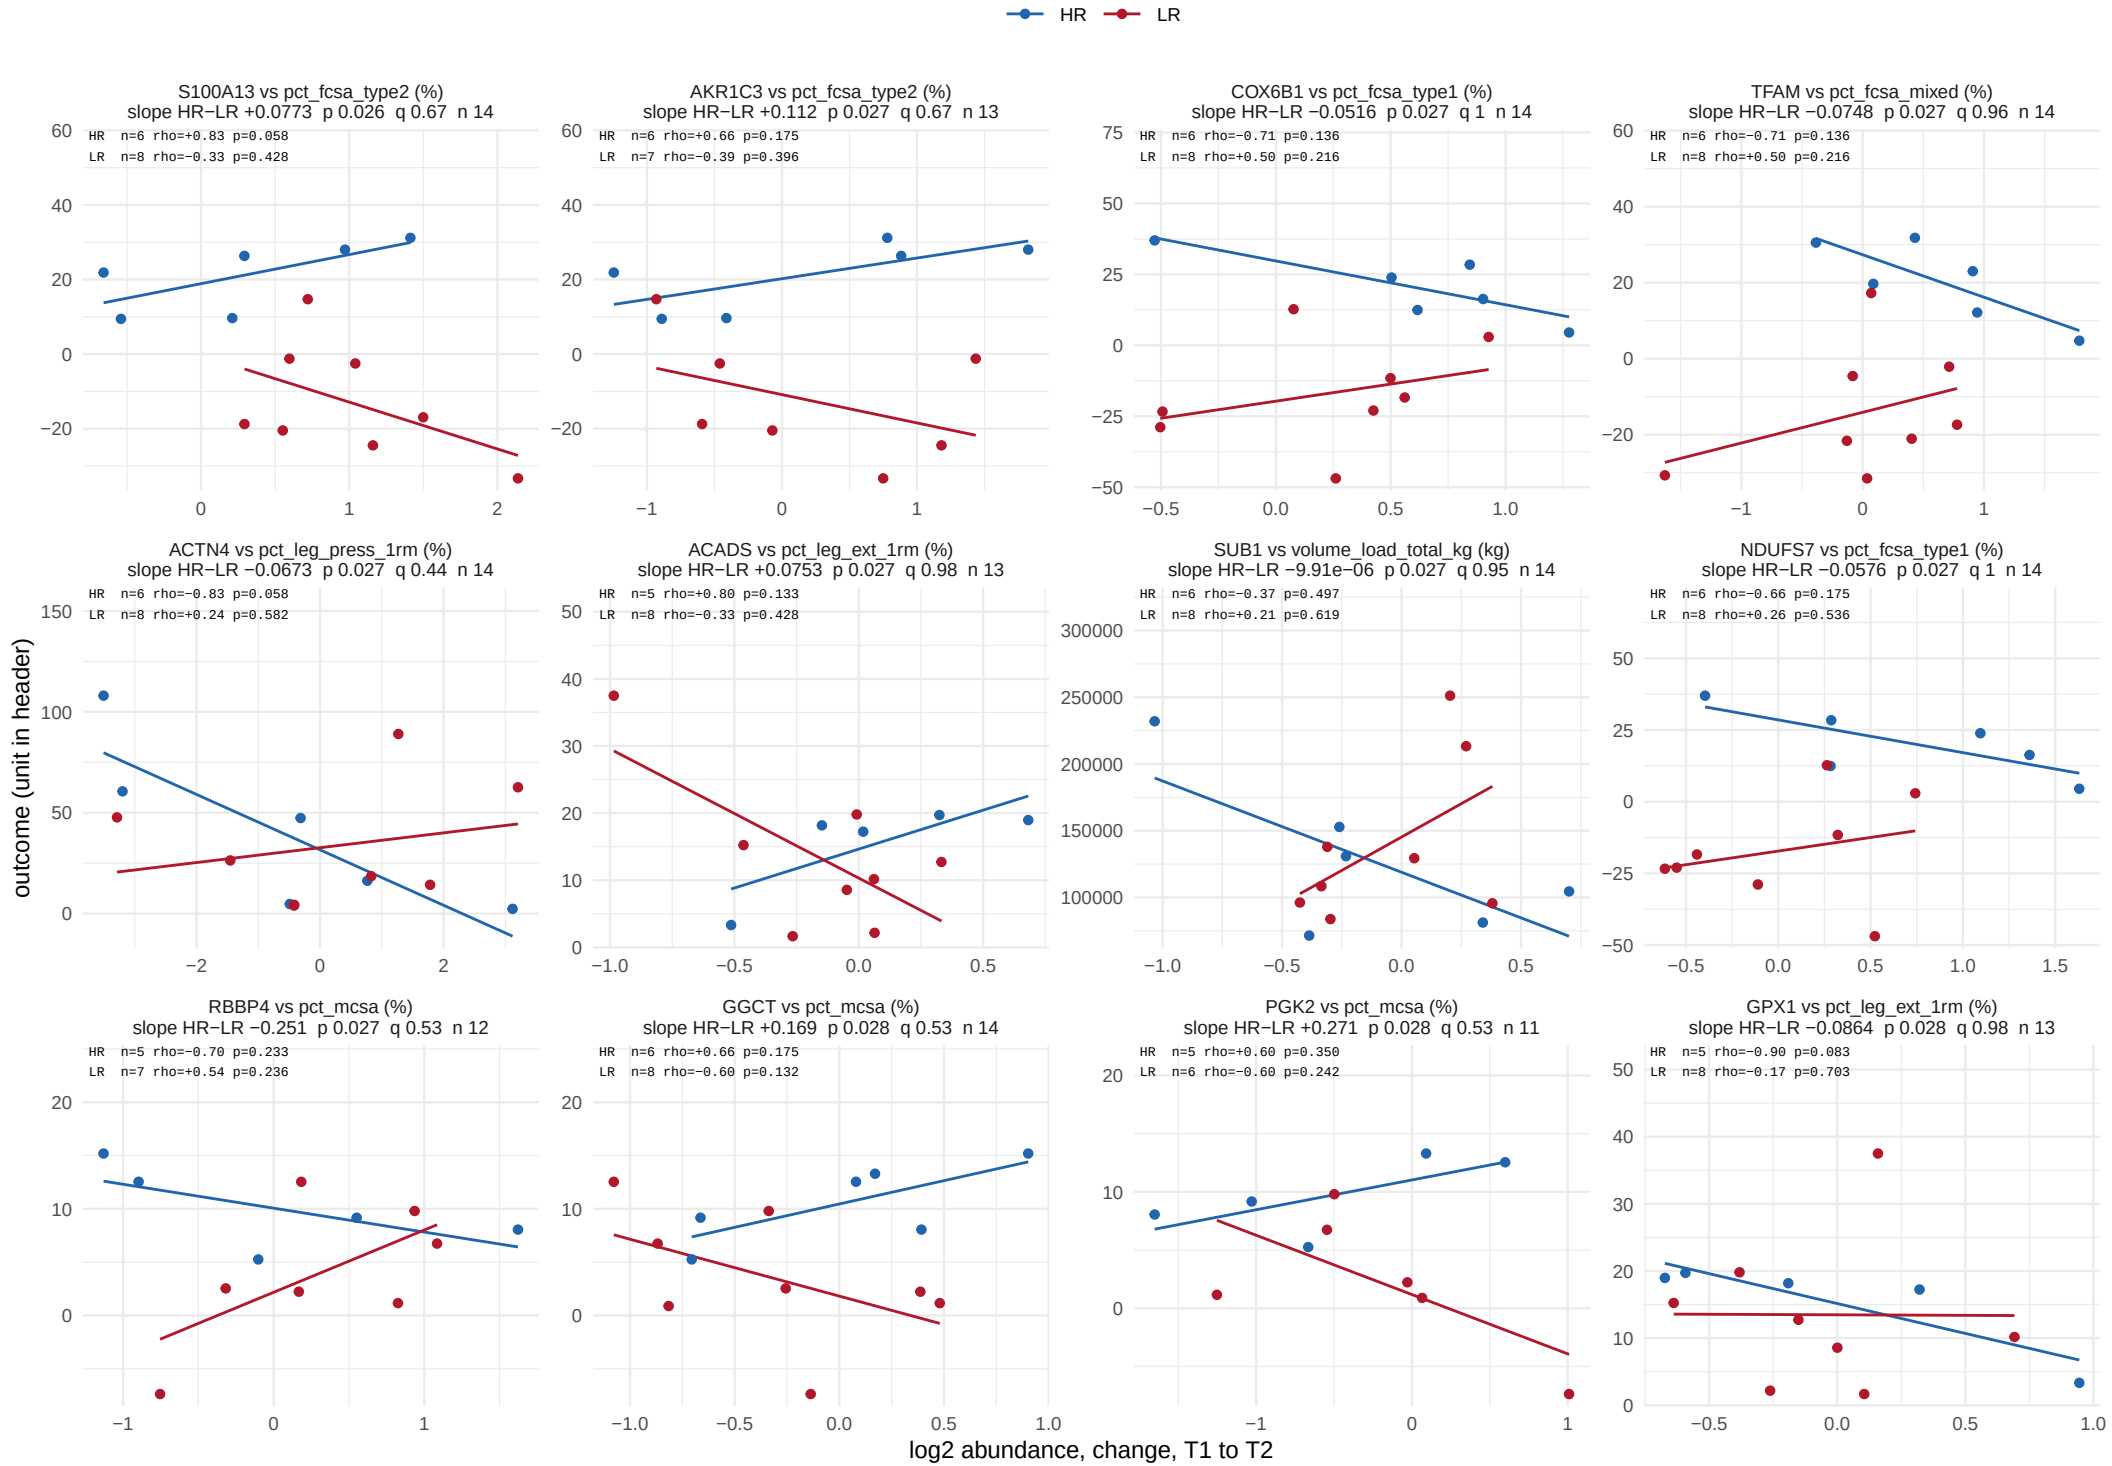

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


444 of 8450 feature−outcome pairs at p < 0.05, 20 at BH < 0.05. Page 24 of 37.

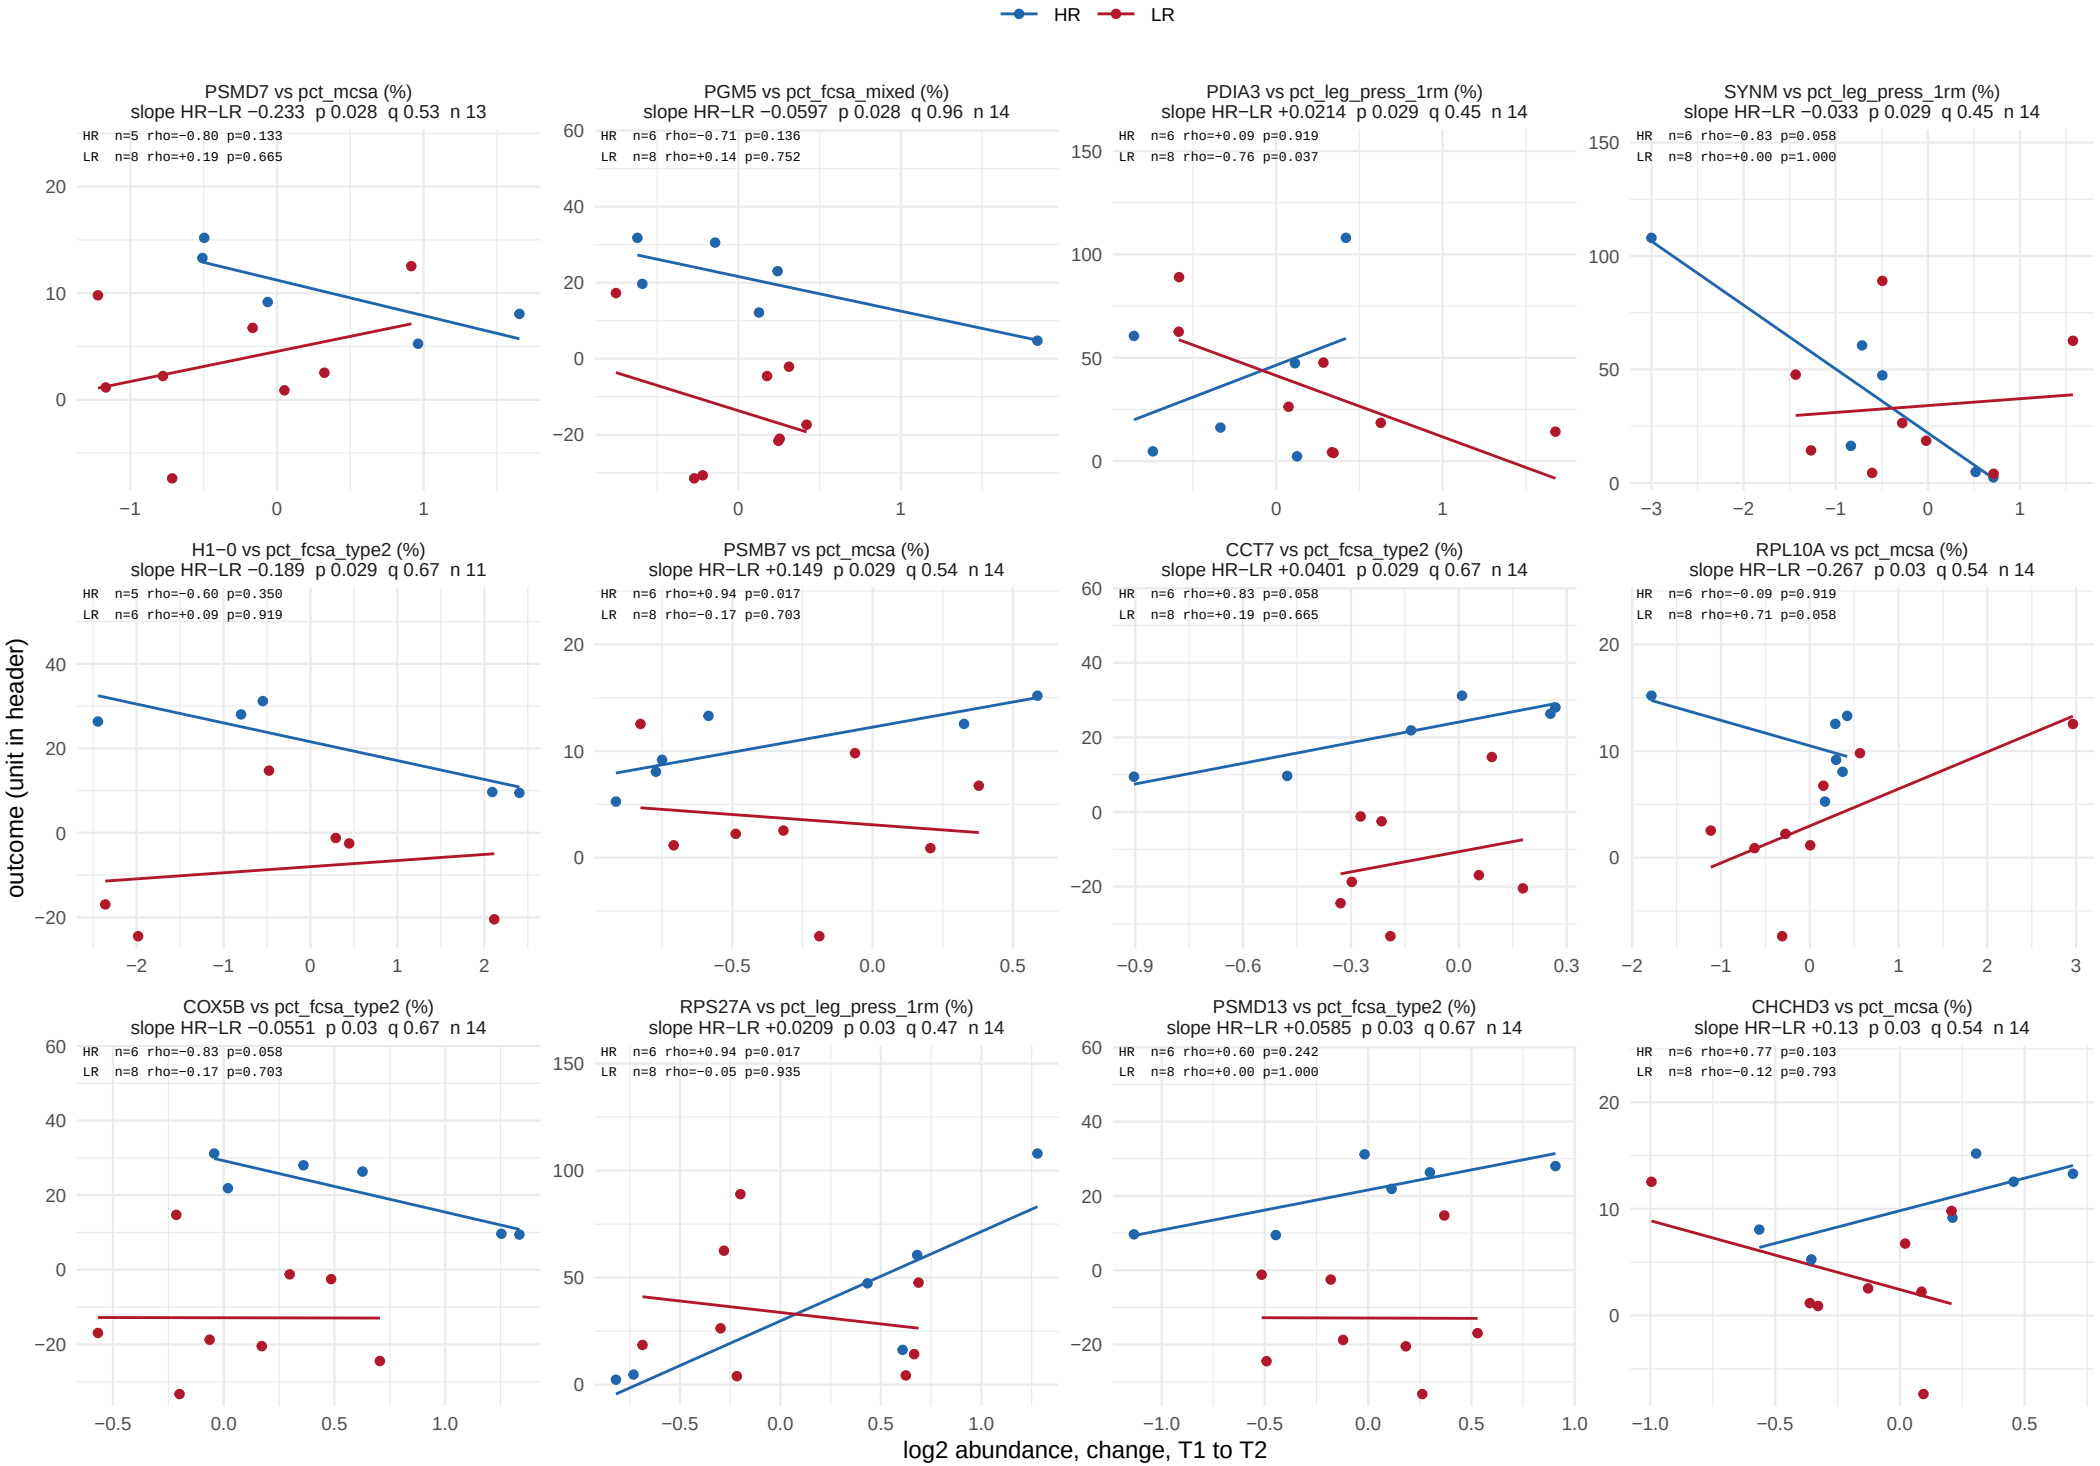

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


444 of 8450 feature−outcome pairs at p < 0.05, 20 at BH < 0.05. Page 25 of 37.

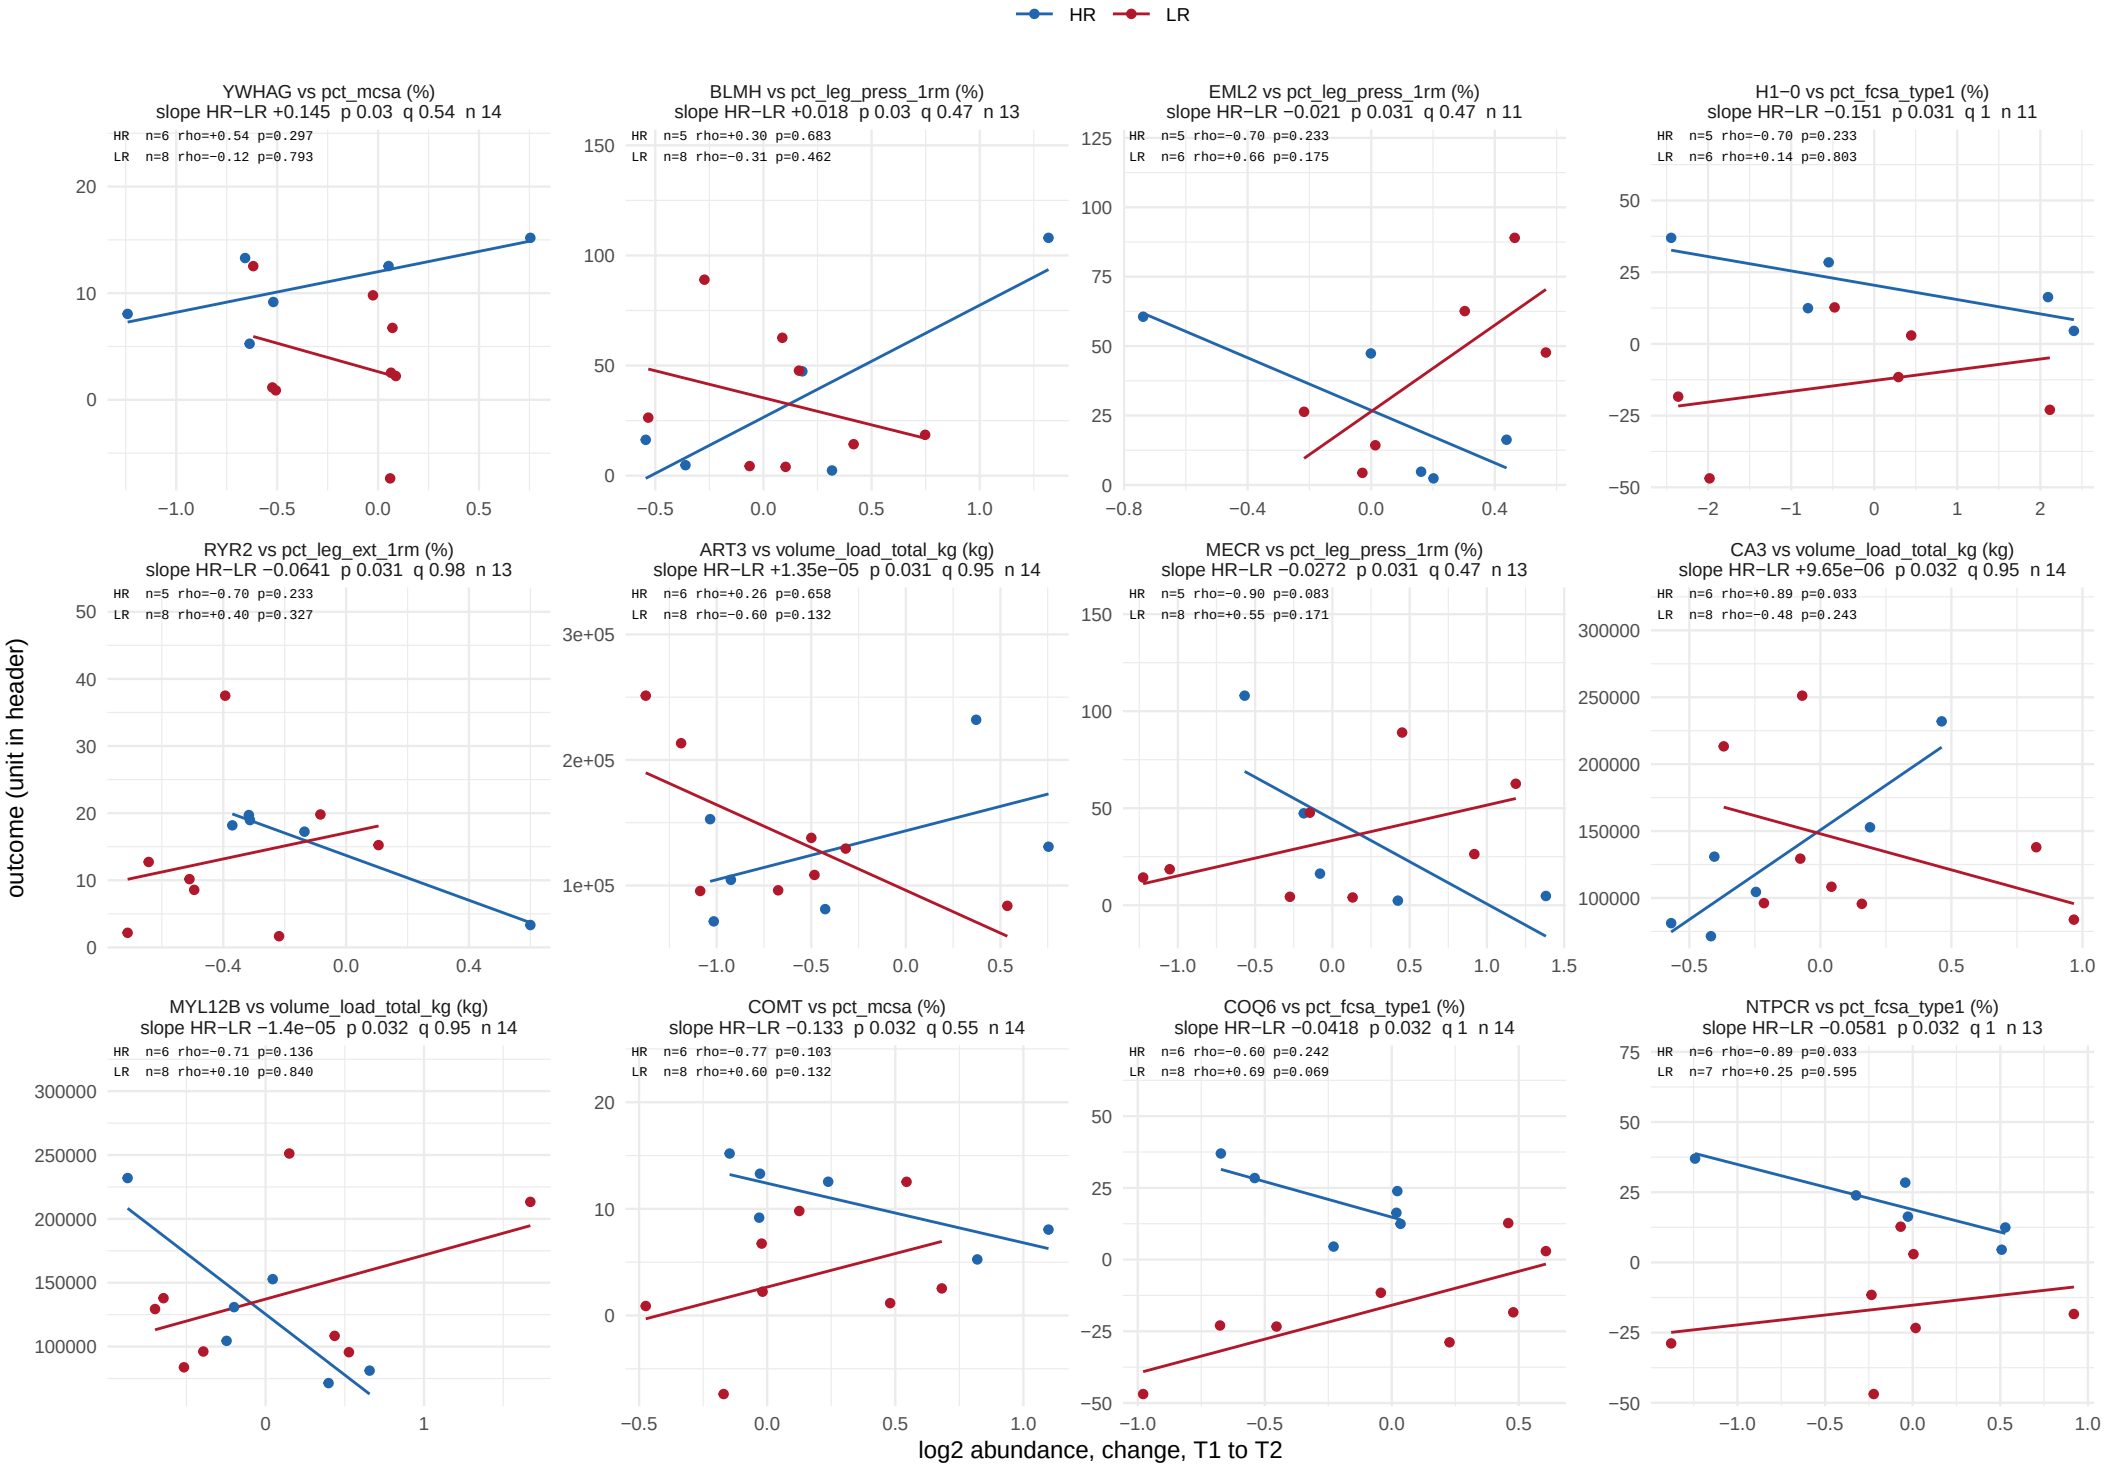

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


444 of 8450 feature−outcome pairs at p < 0.05, 20 at BH < 0.05. Page 26 of 37.

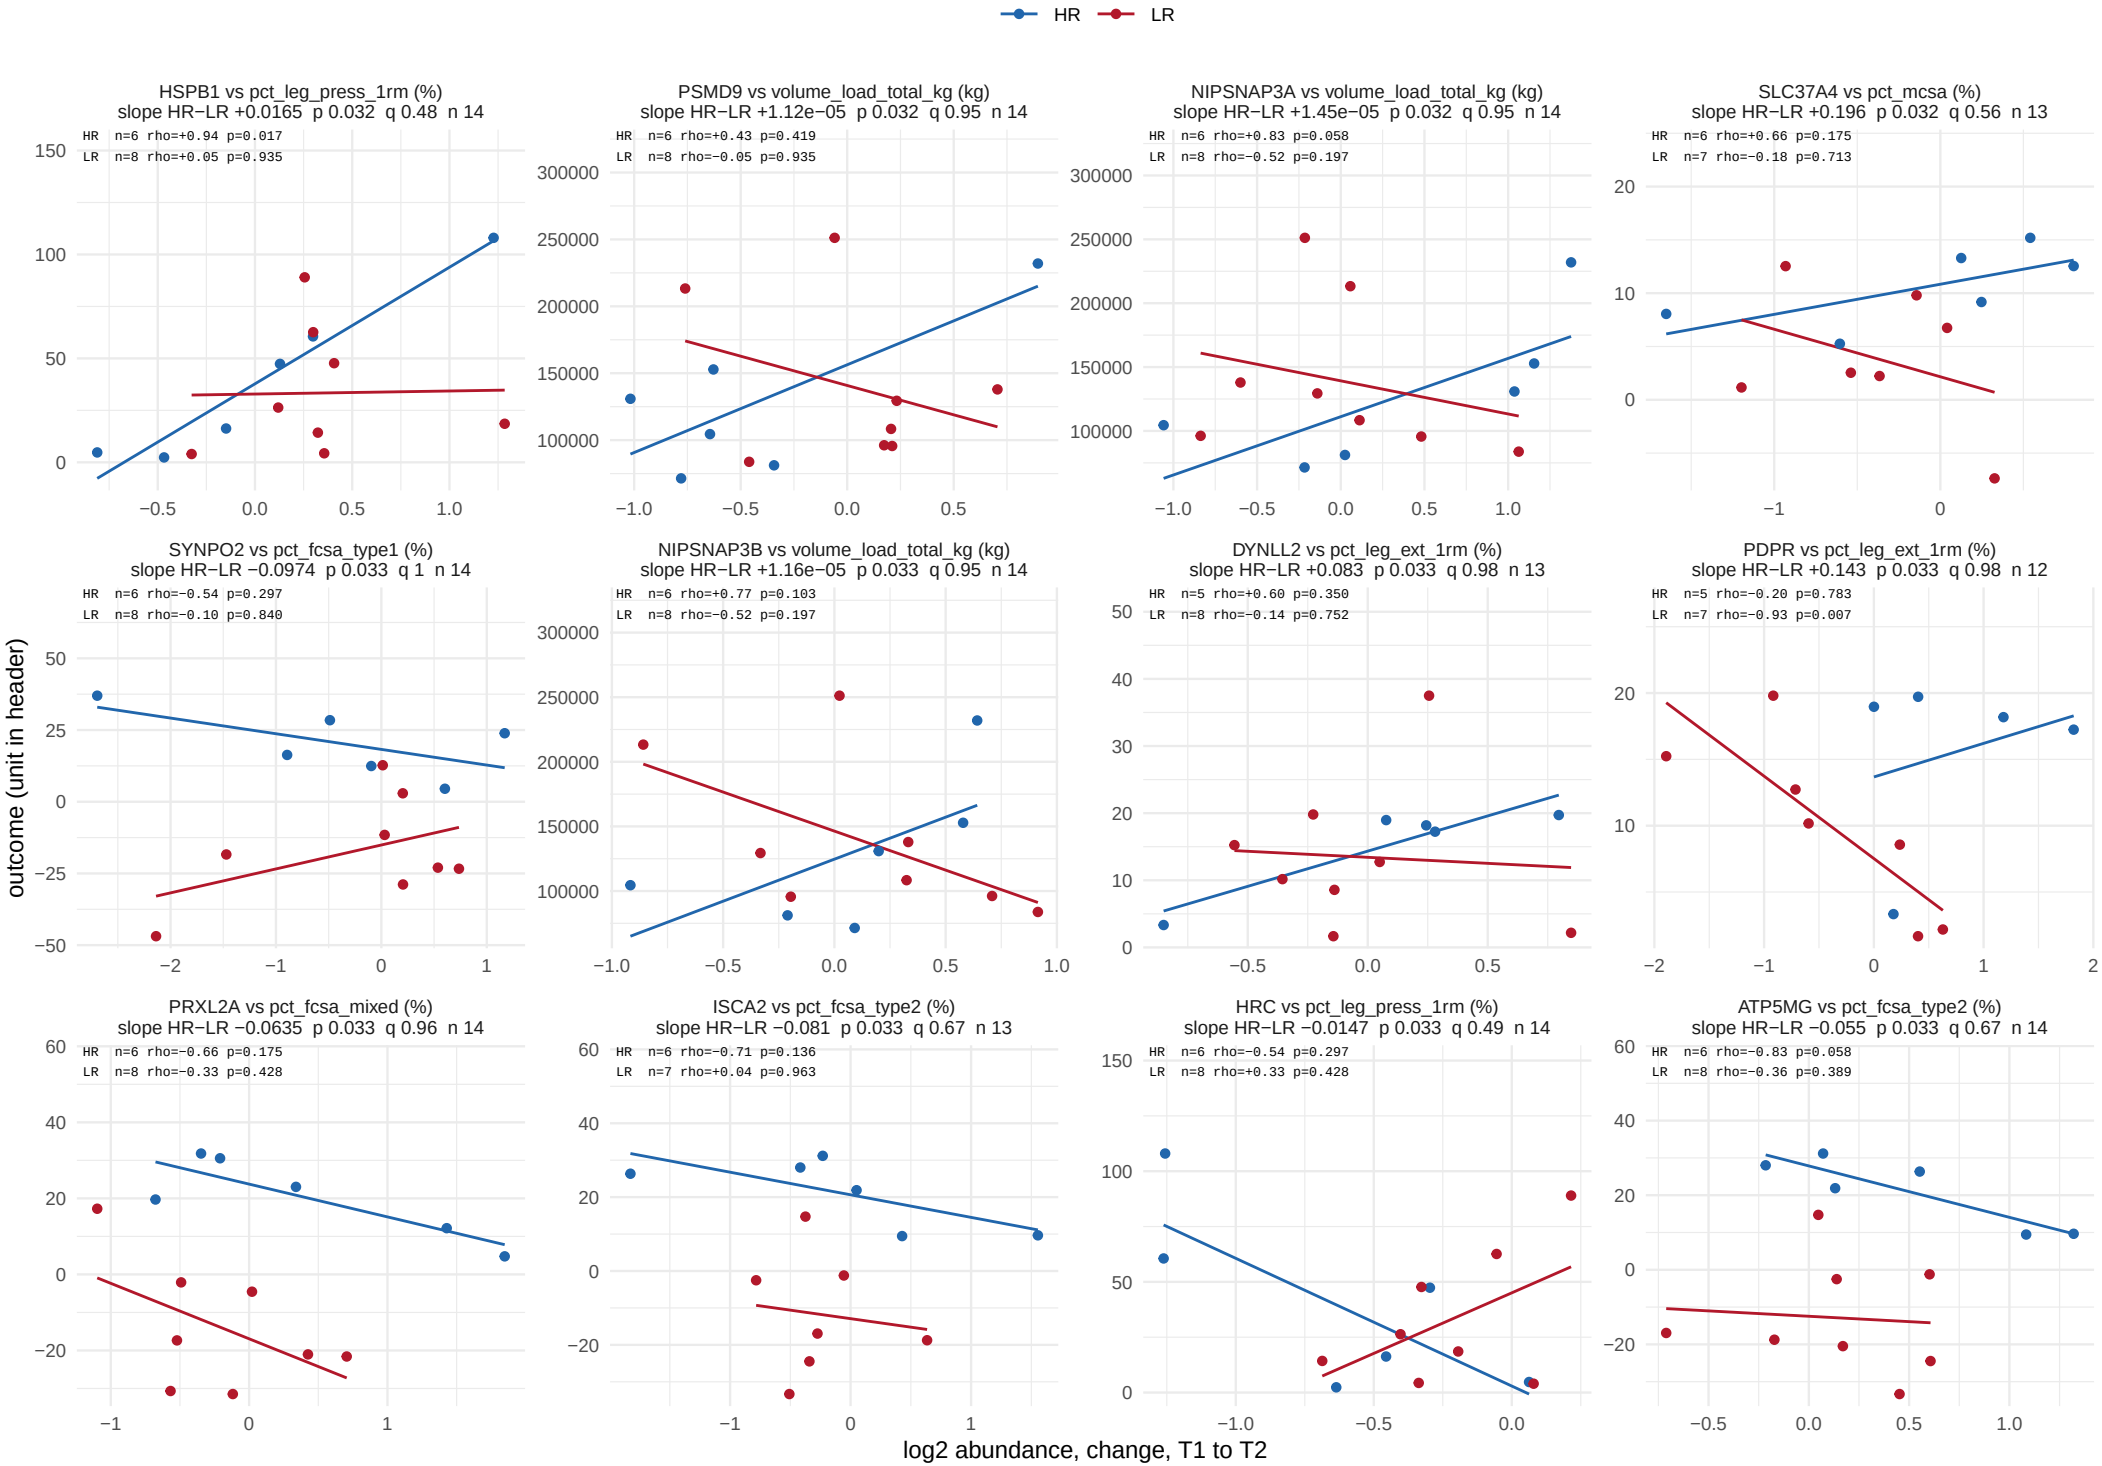

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


444 of 8450 feature−outcome pairs at p < 0.05, 20 at BH < 0.05. Page 27 of 37.

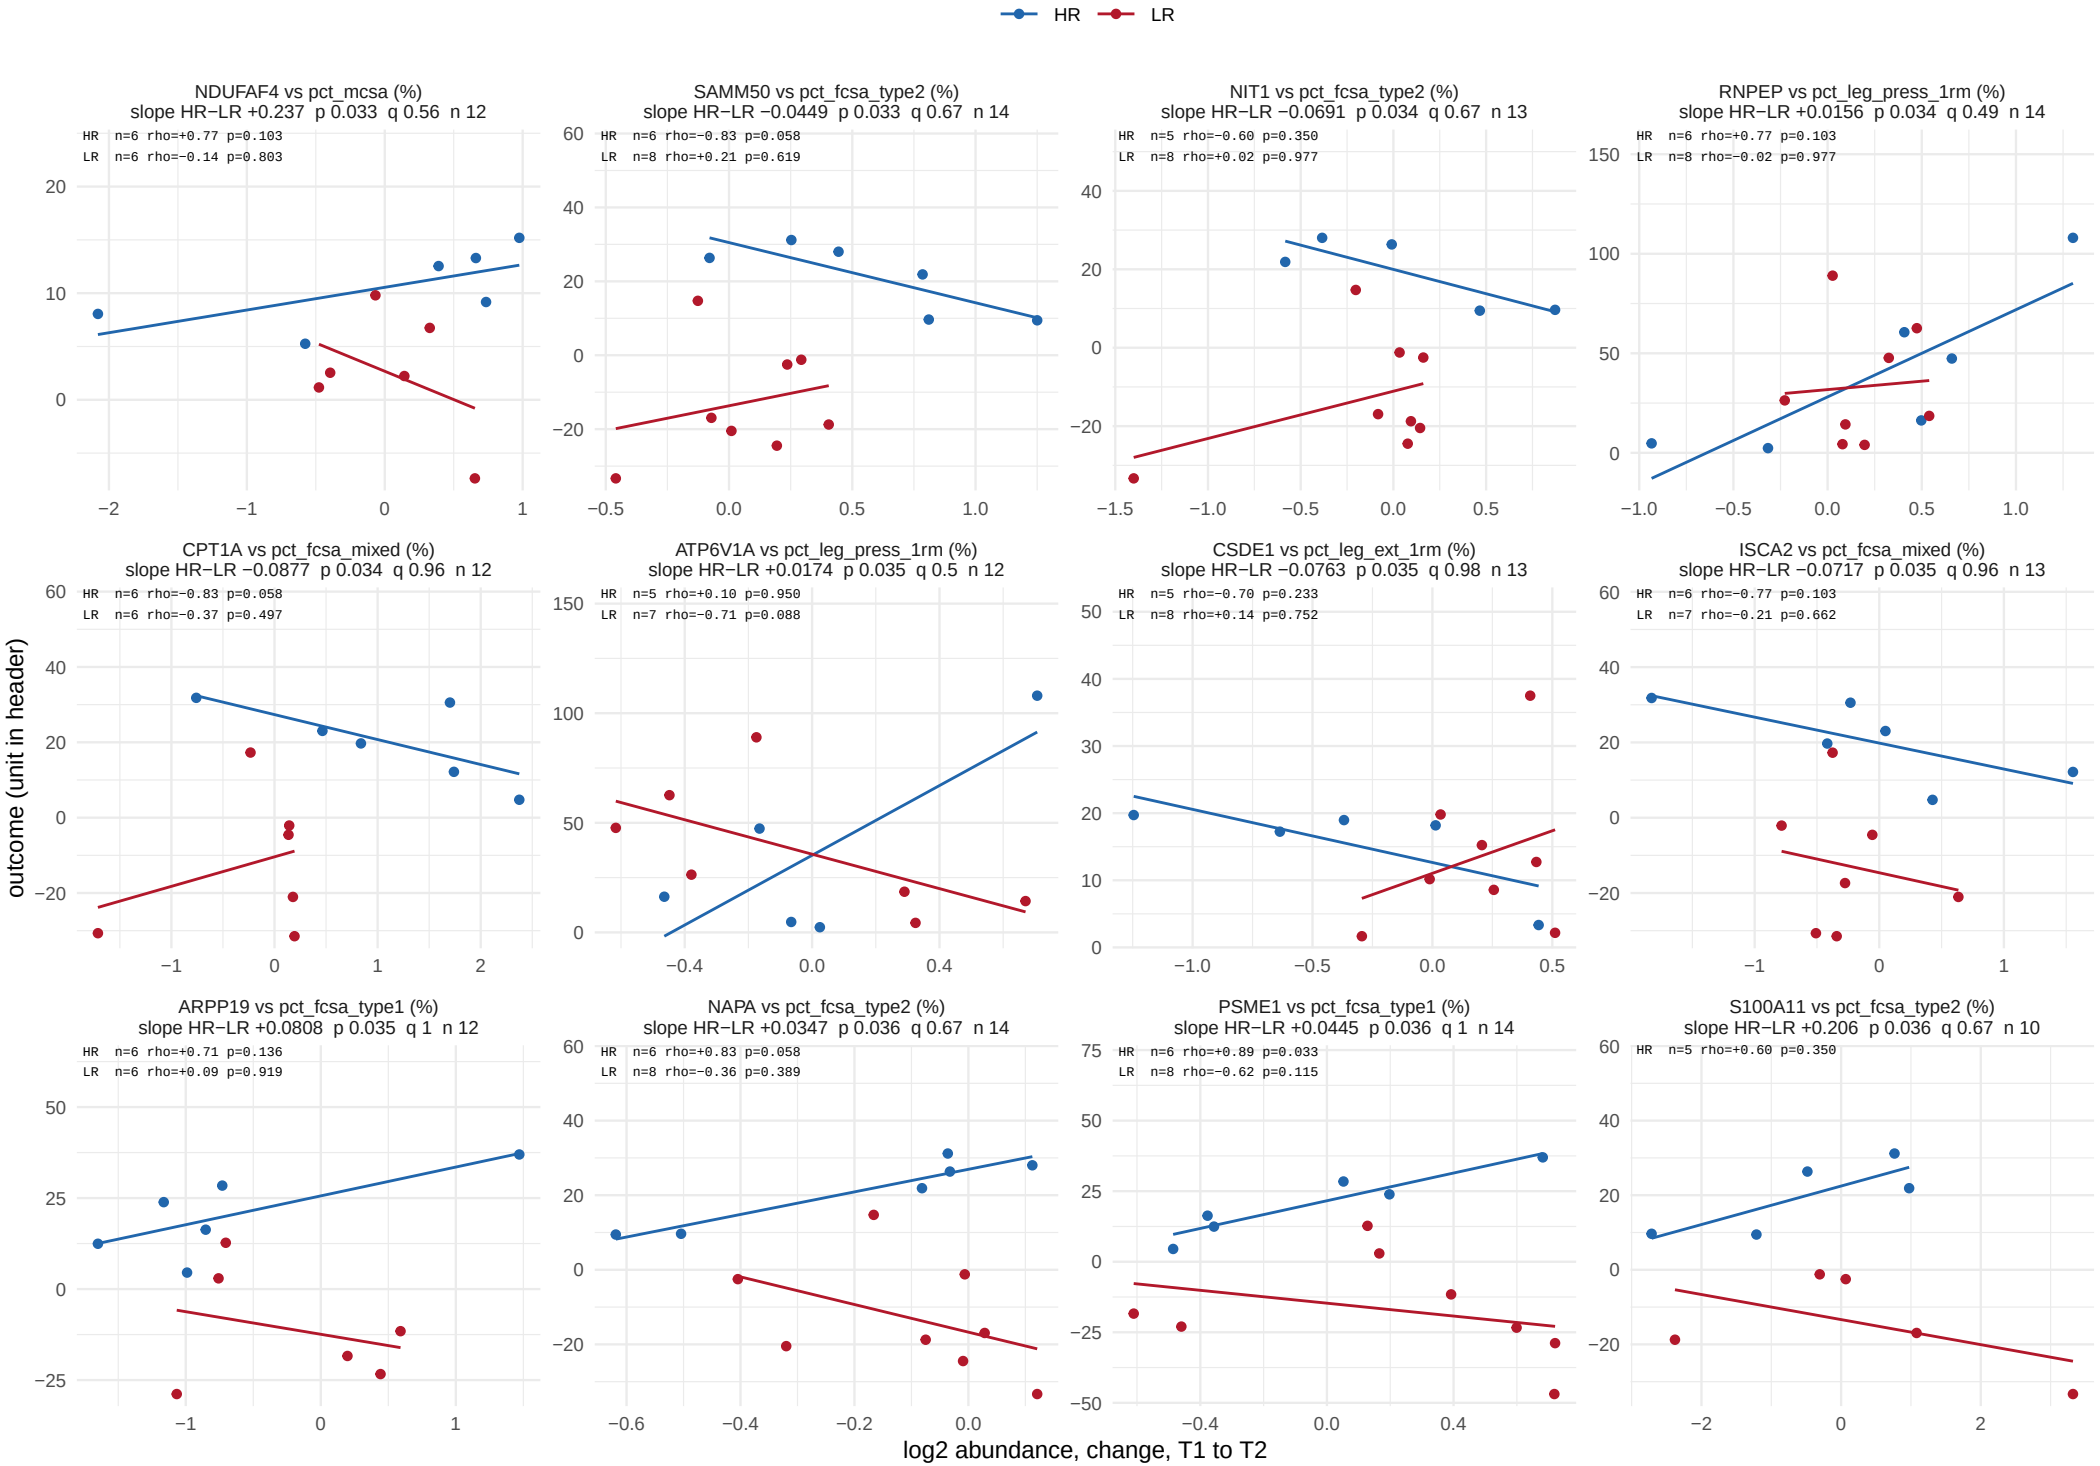

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


444 of 8450 feature−outcome pairs at p < 0.05, 20 at BH < 0.05. Page 28 of 37.

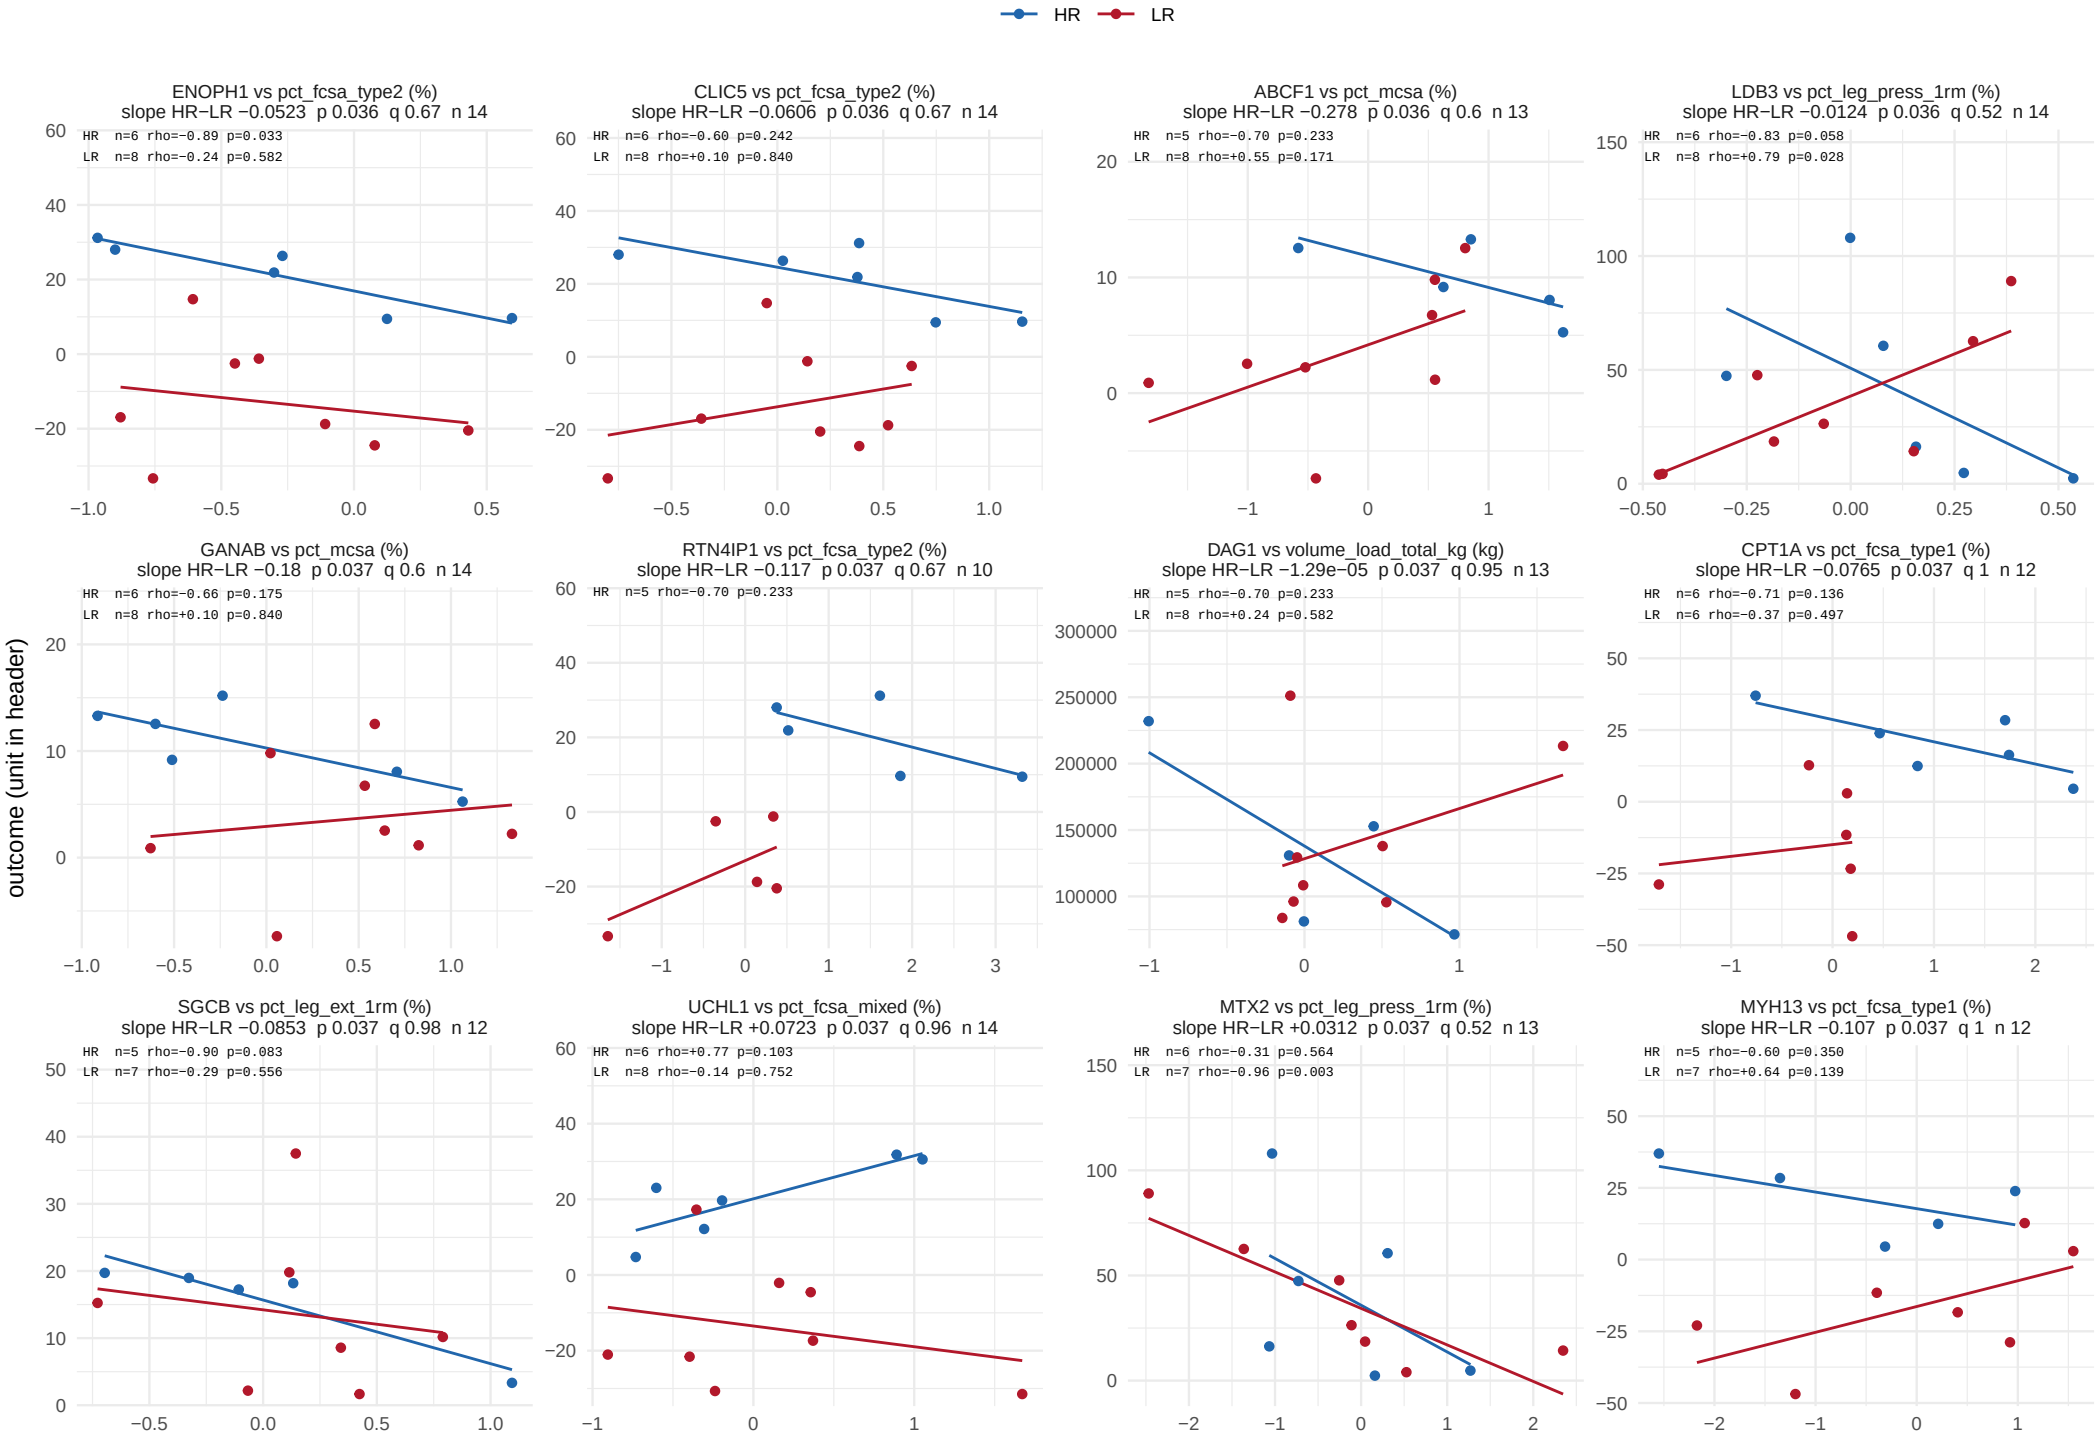

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


444 of 8450 feature−outcome pairs at p < 0.05, 20 at BH < 0.05. Page 29 of 37.

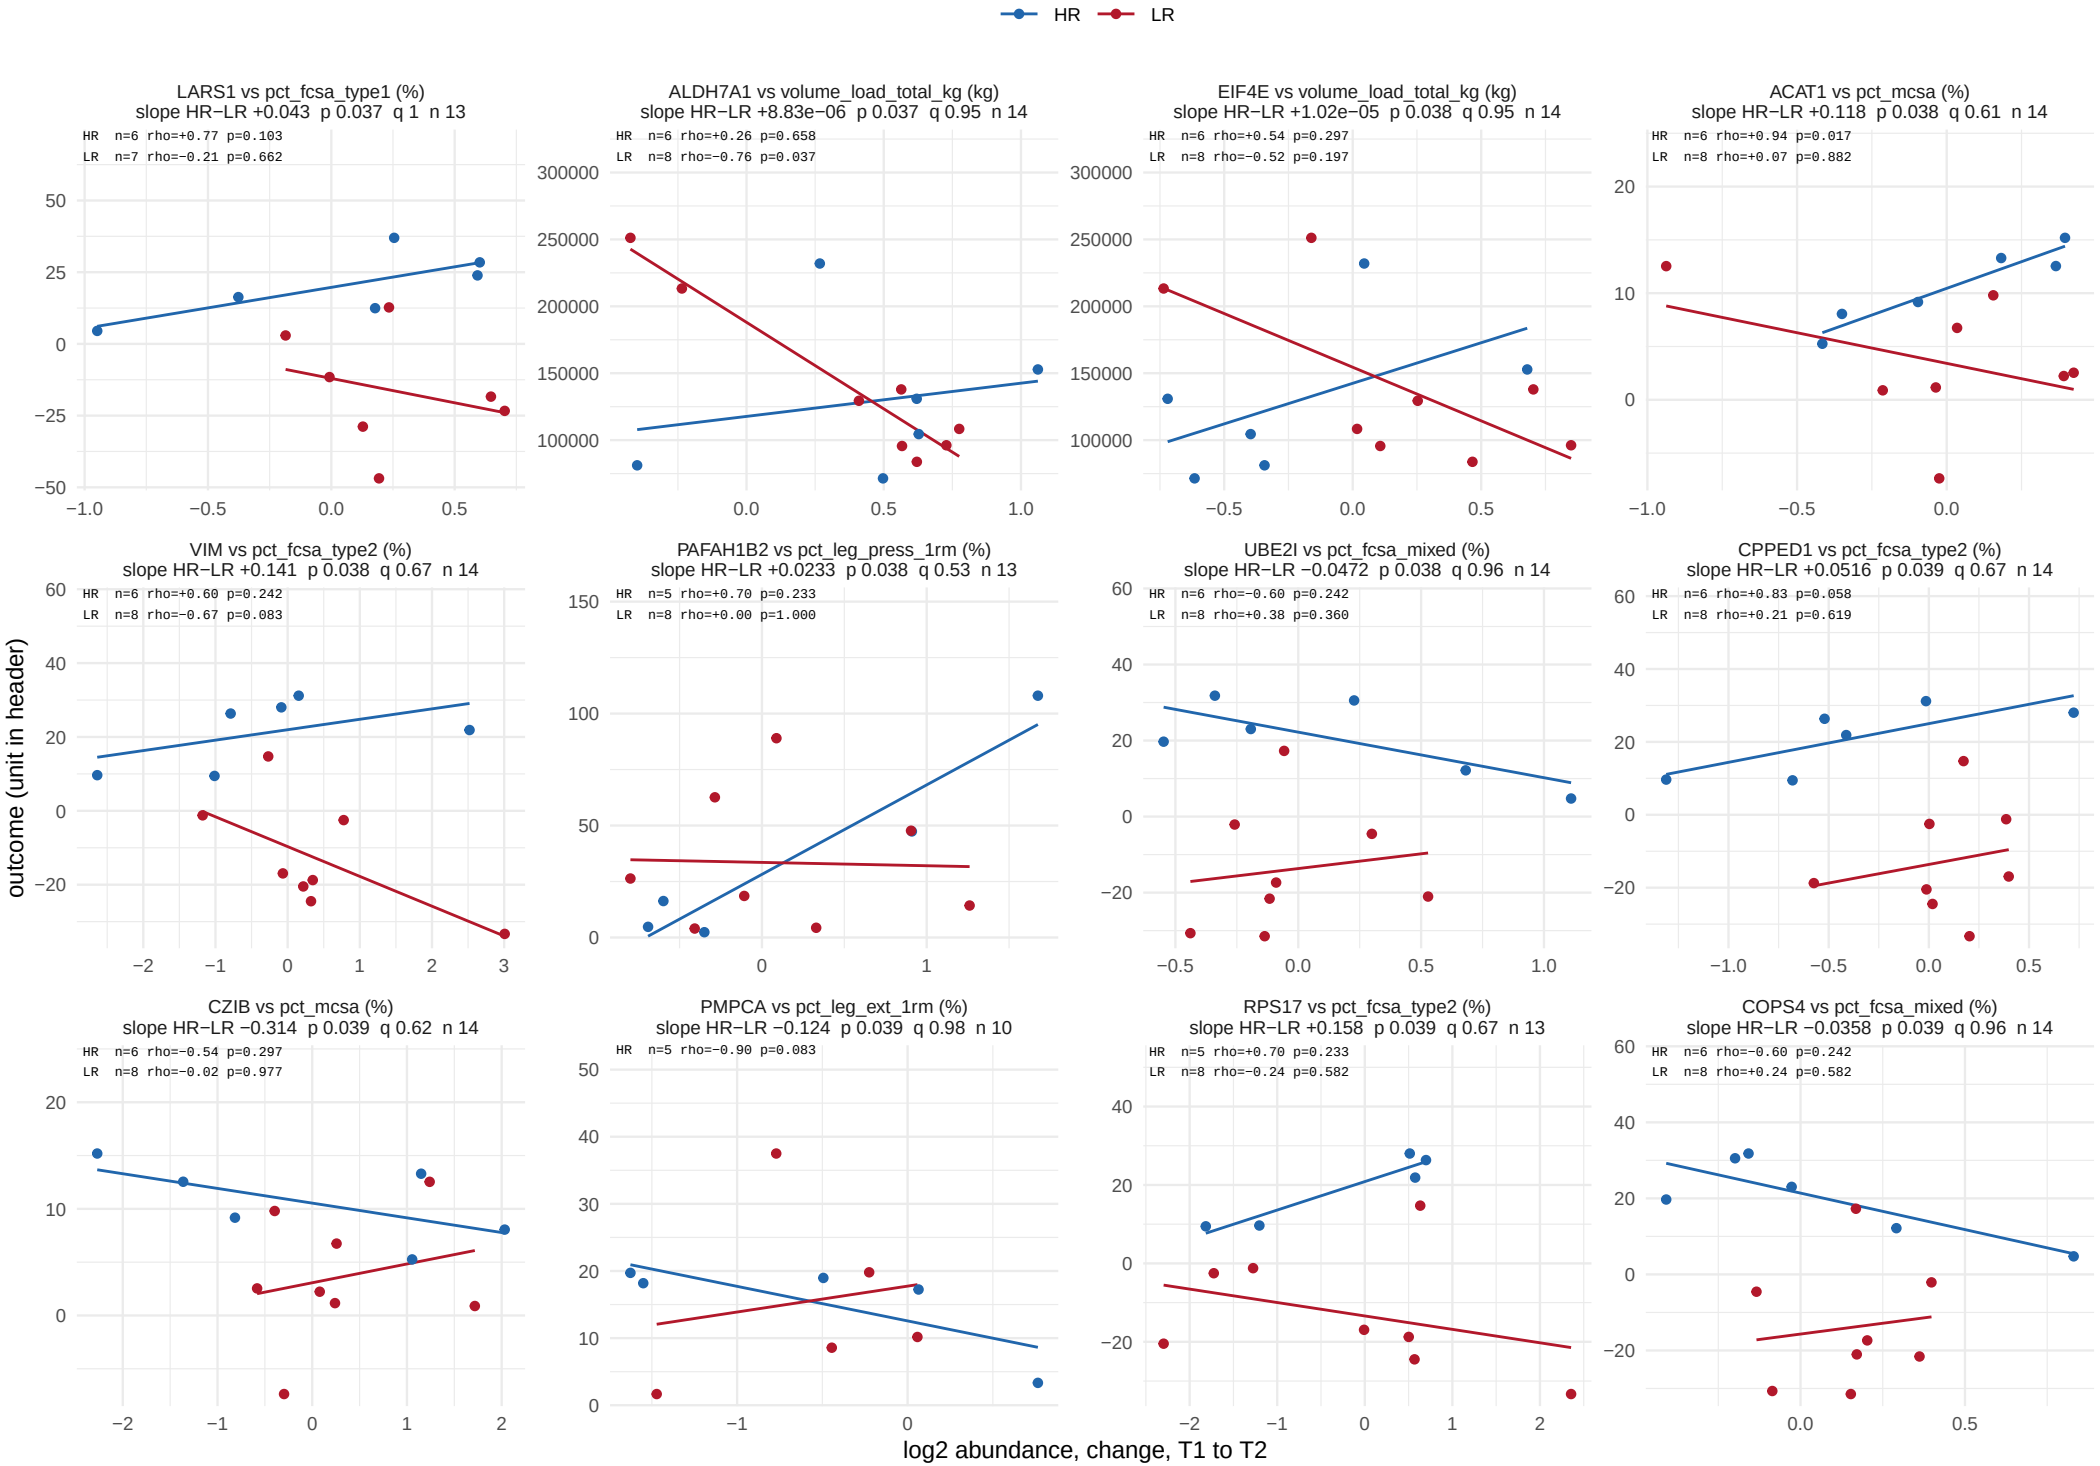

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


444 of 8450 feature−outcome pairs at p < 0.05, 20 at BH < 0.05. Page 30 of 37.

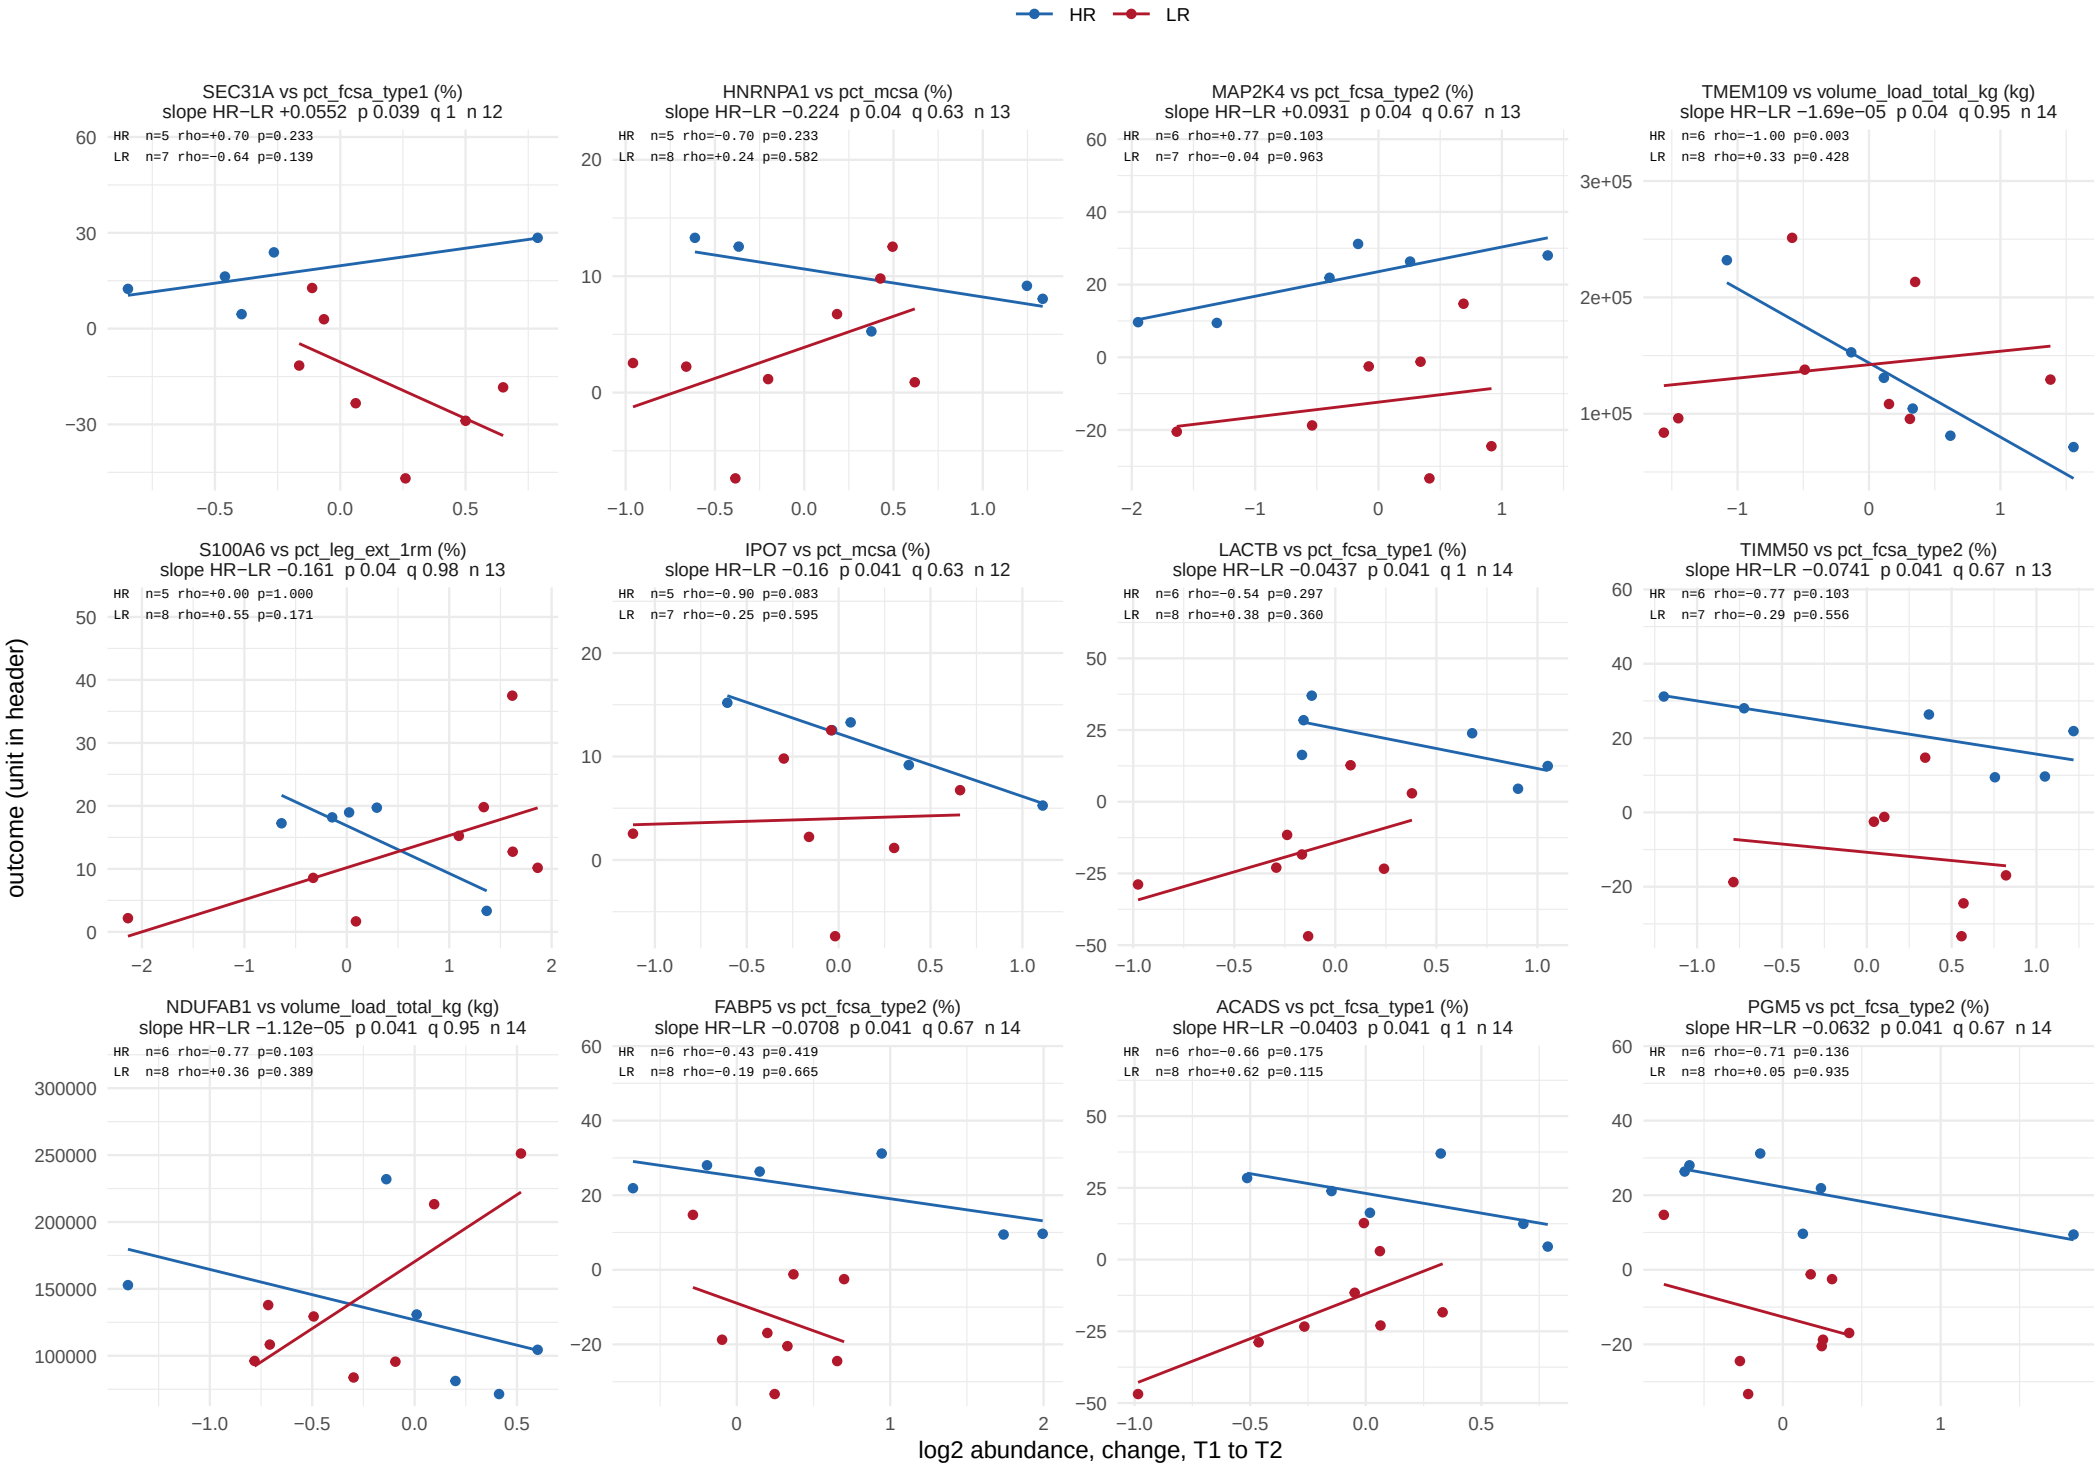

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


444 of 8450 feature−outcome pairs at p < 0.05, 20 at BH < 0.05. Page 31 of 37.

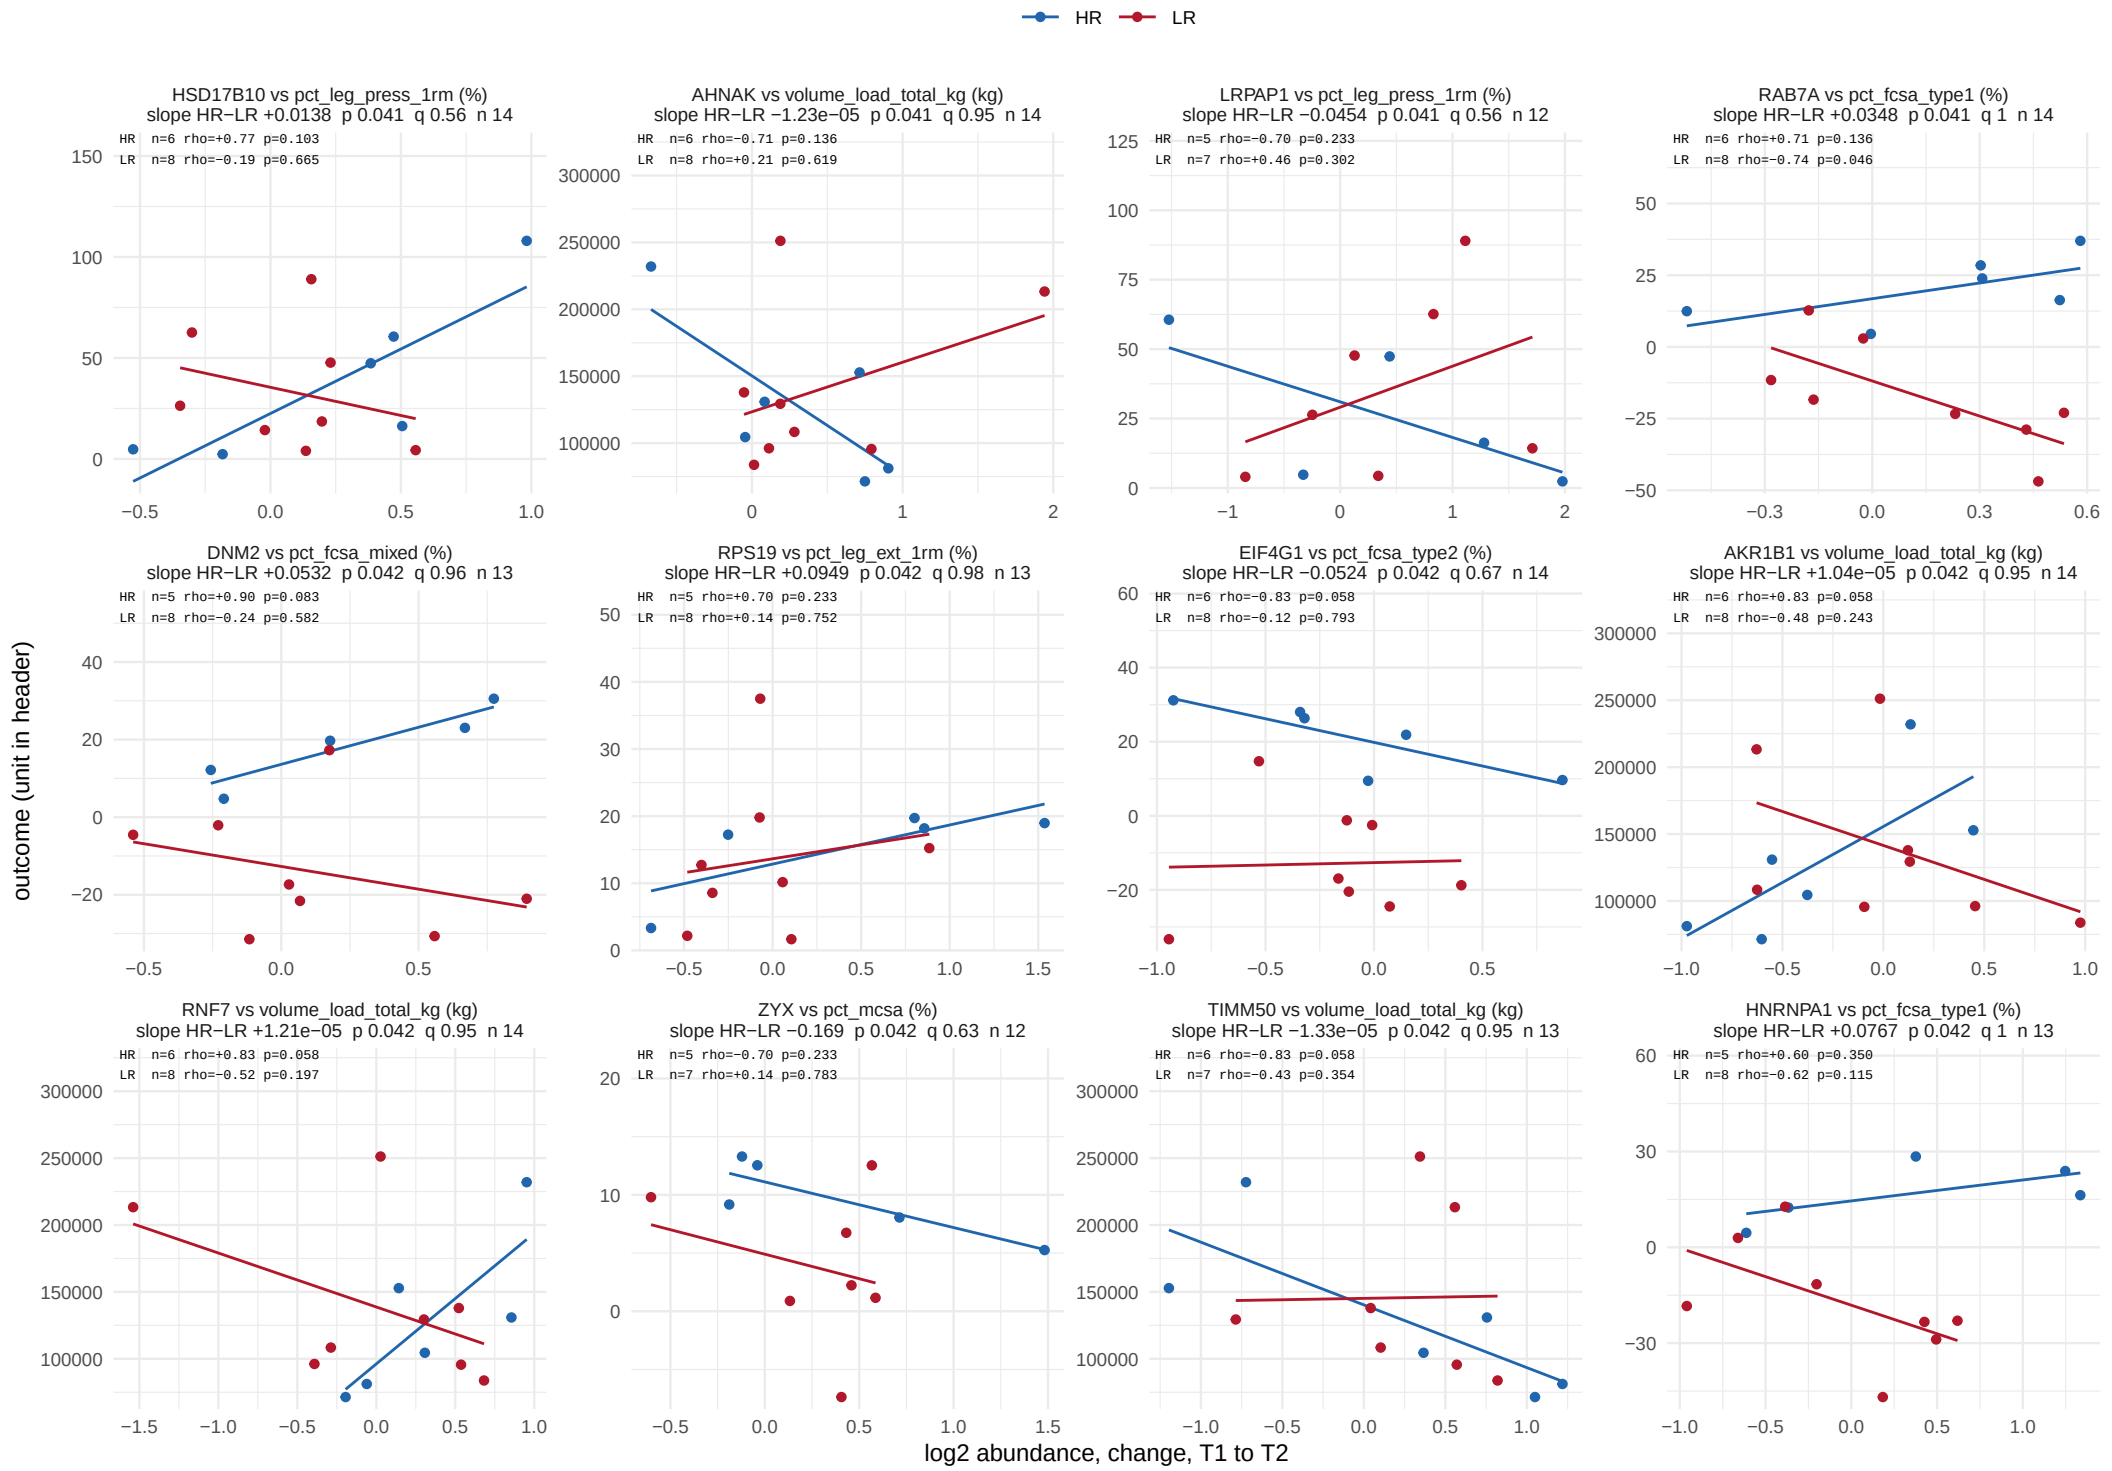

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


444 of 8450 feature−outcome pairs at p < 0.05, 20 at BH < 0.05. Page 32 of 37.

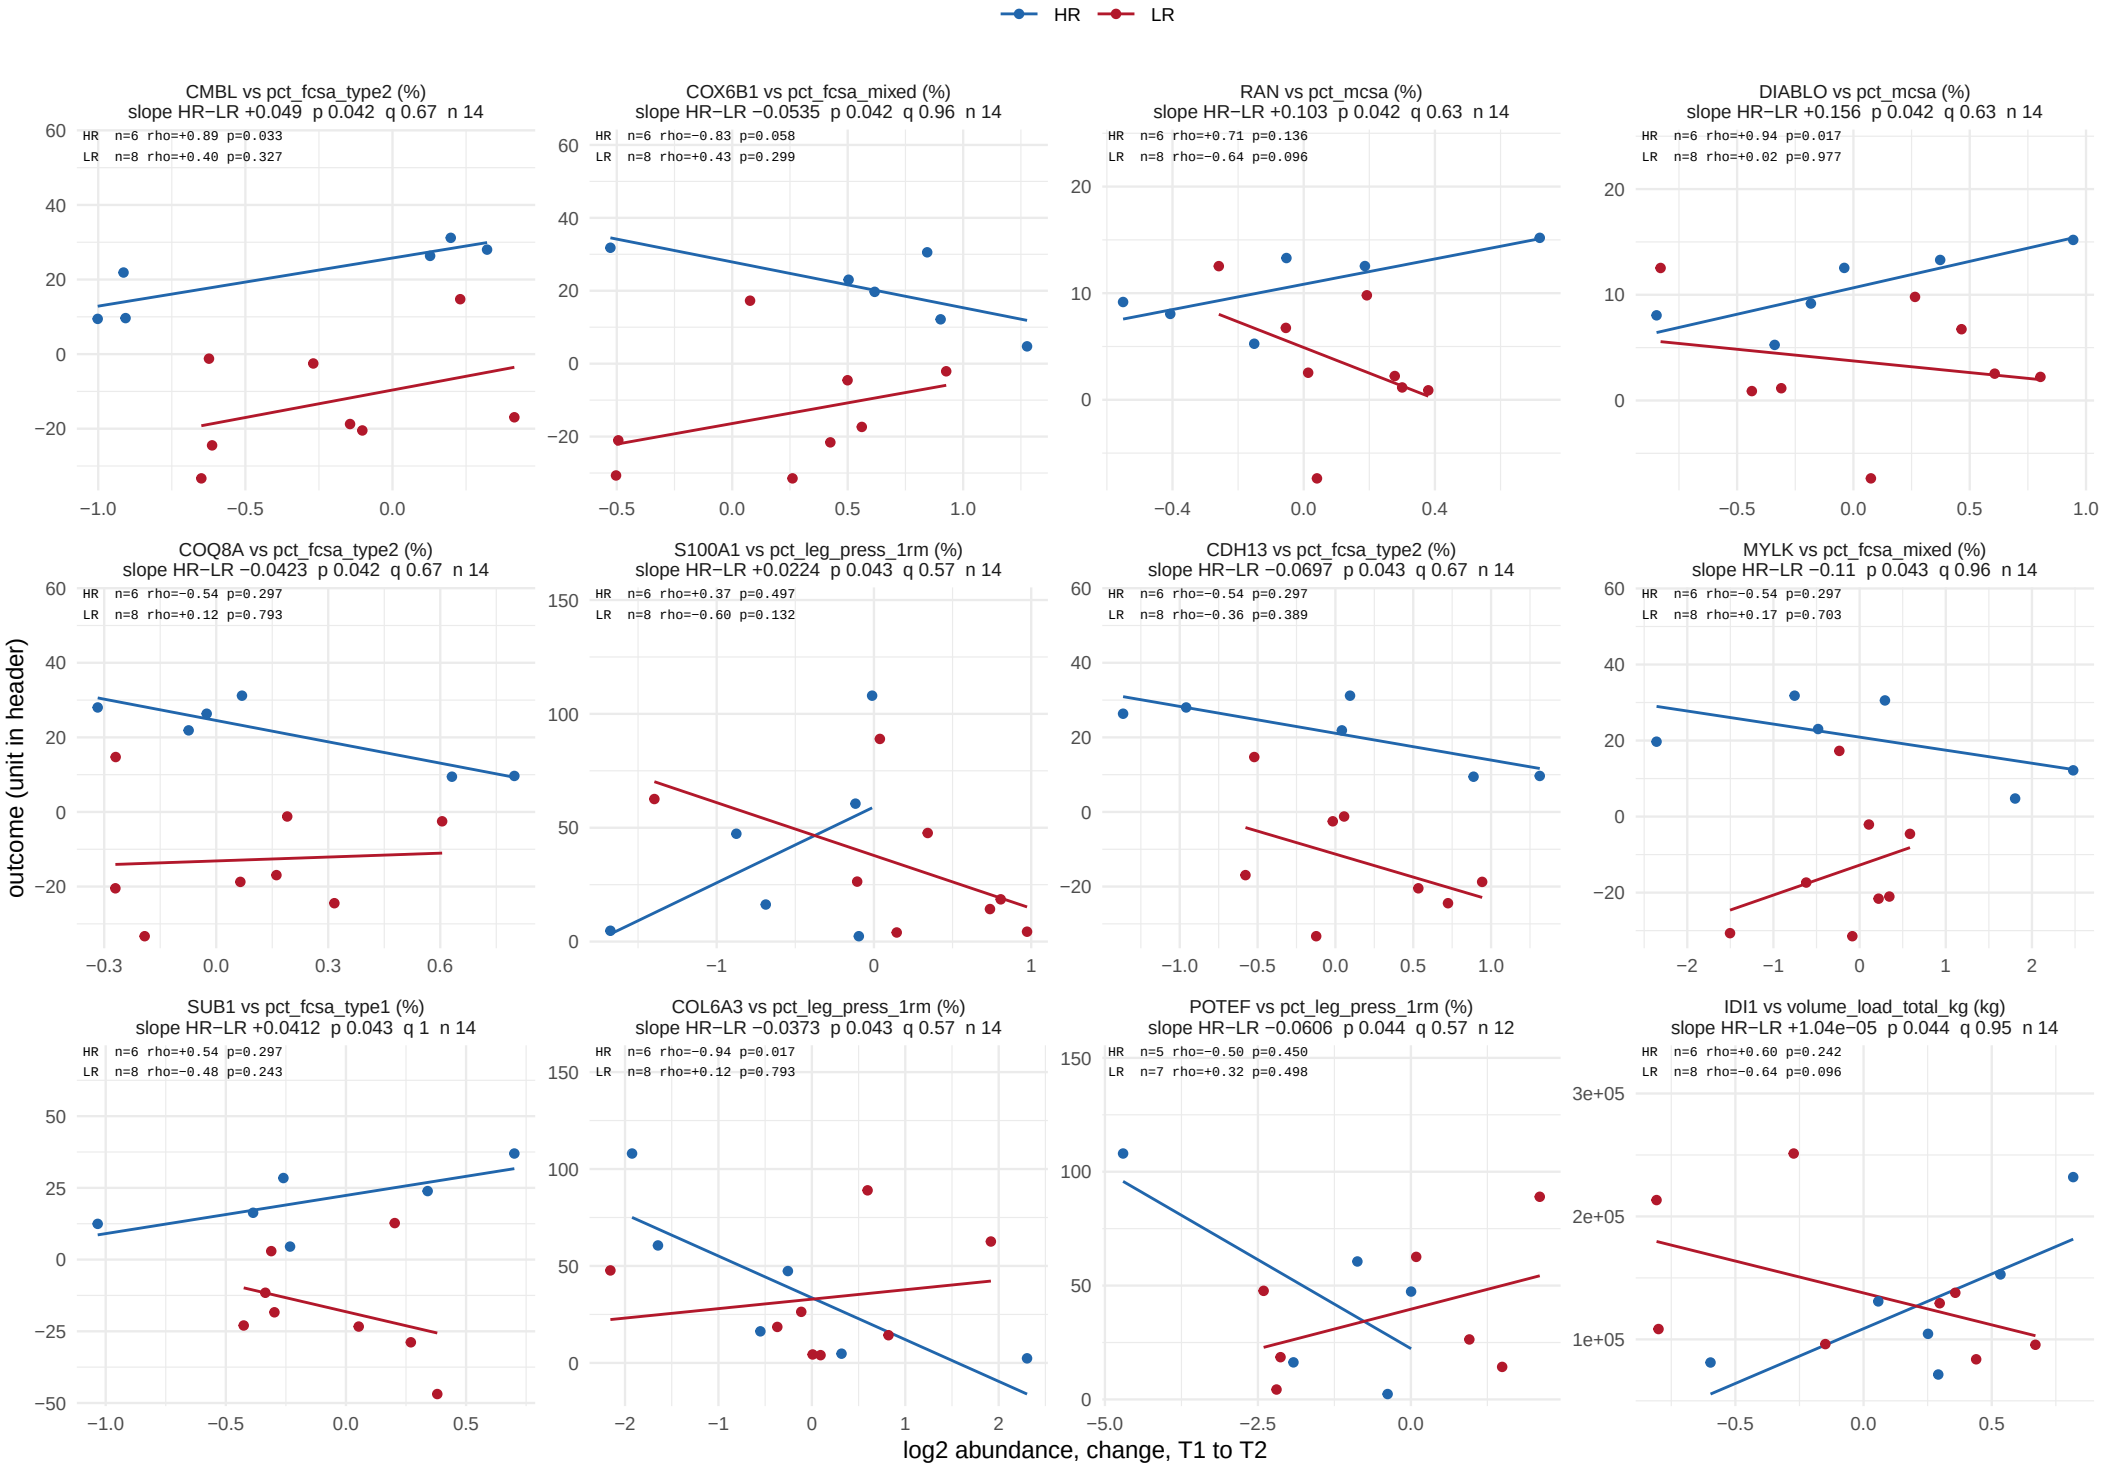

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


444 of 8450 feature−outcome pairs at p < 0.05, 20 at BH < 0.05. Page 33 of 37.

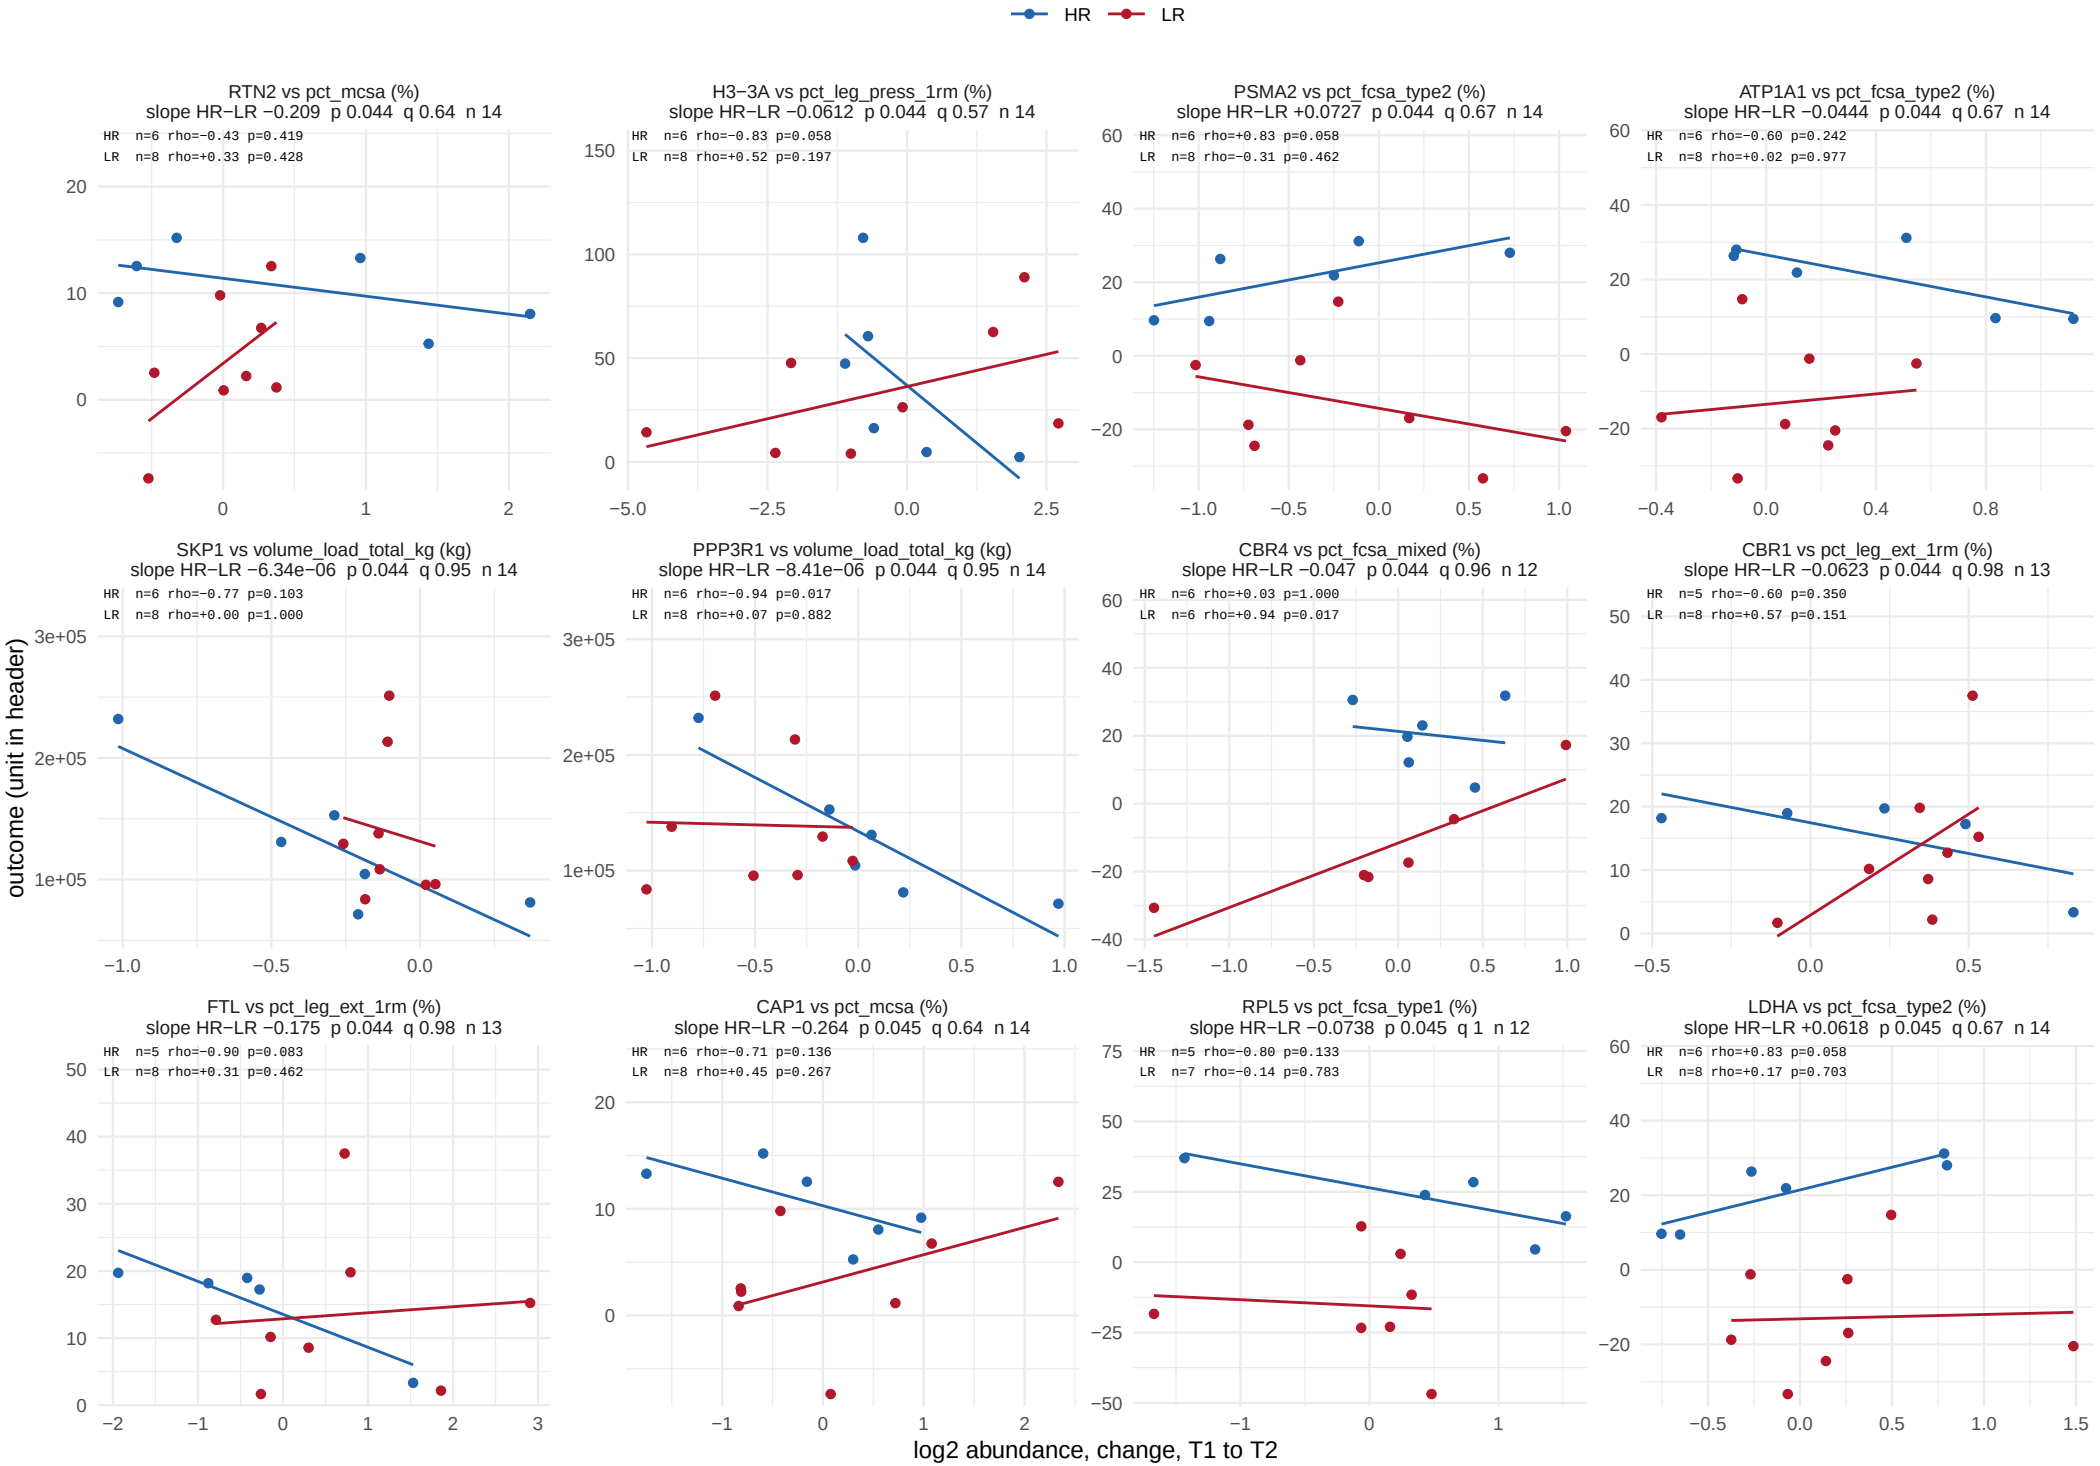

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


444 of 8450 feature−outcome pairs at p < 0.05, 20 at BH < 0.05. Page 34 of 37.

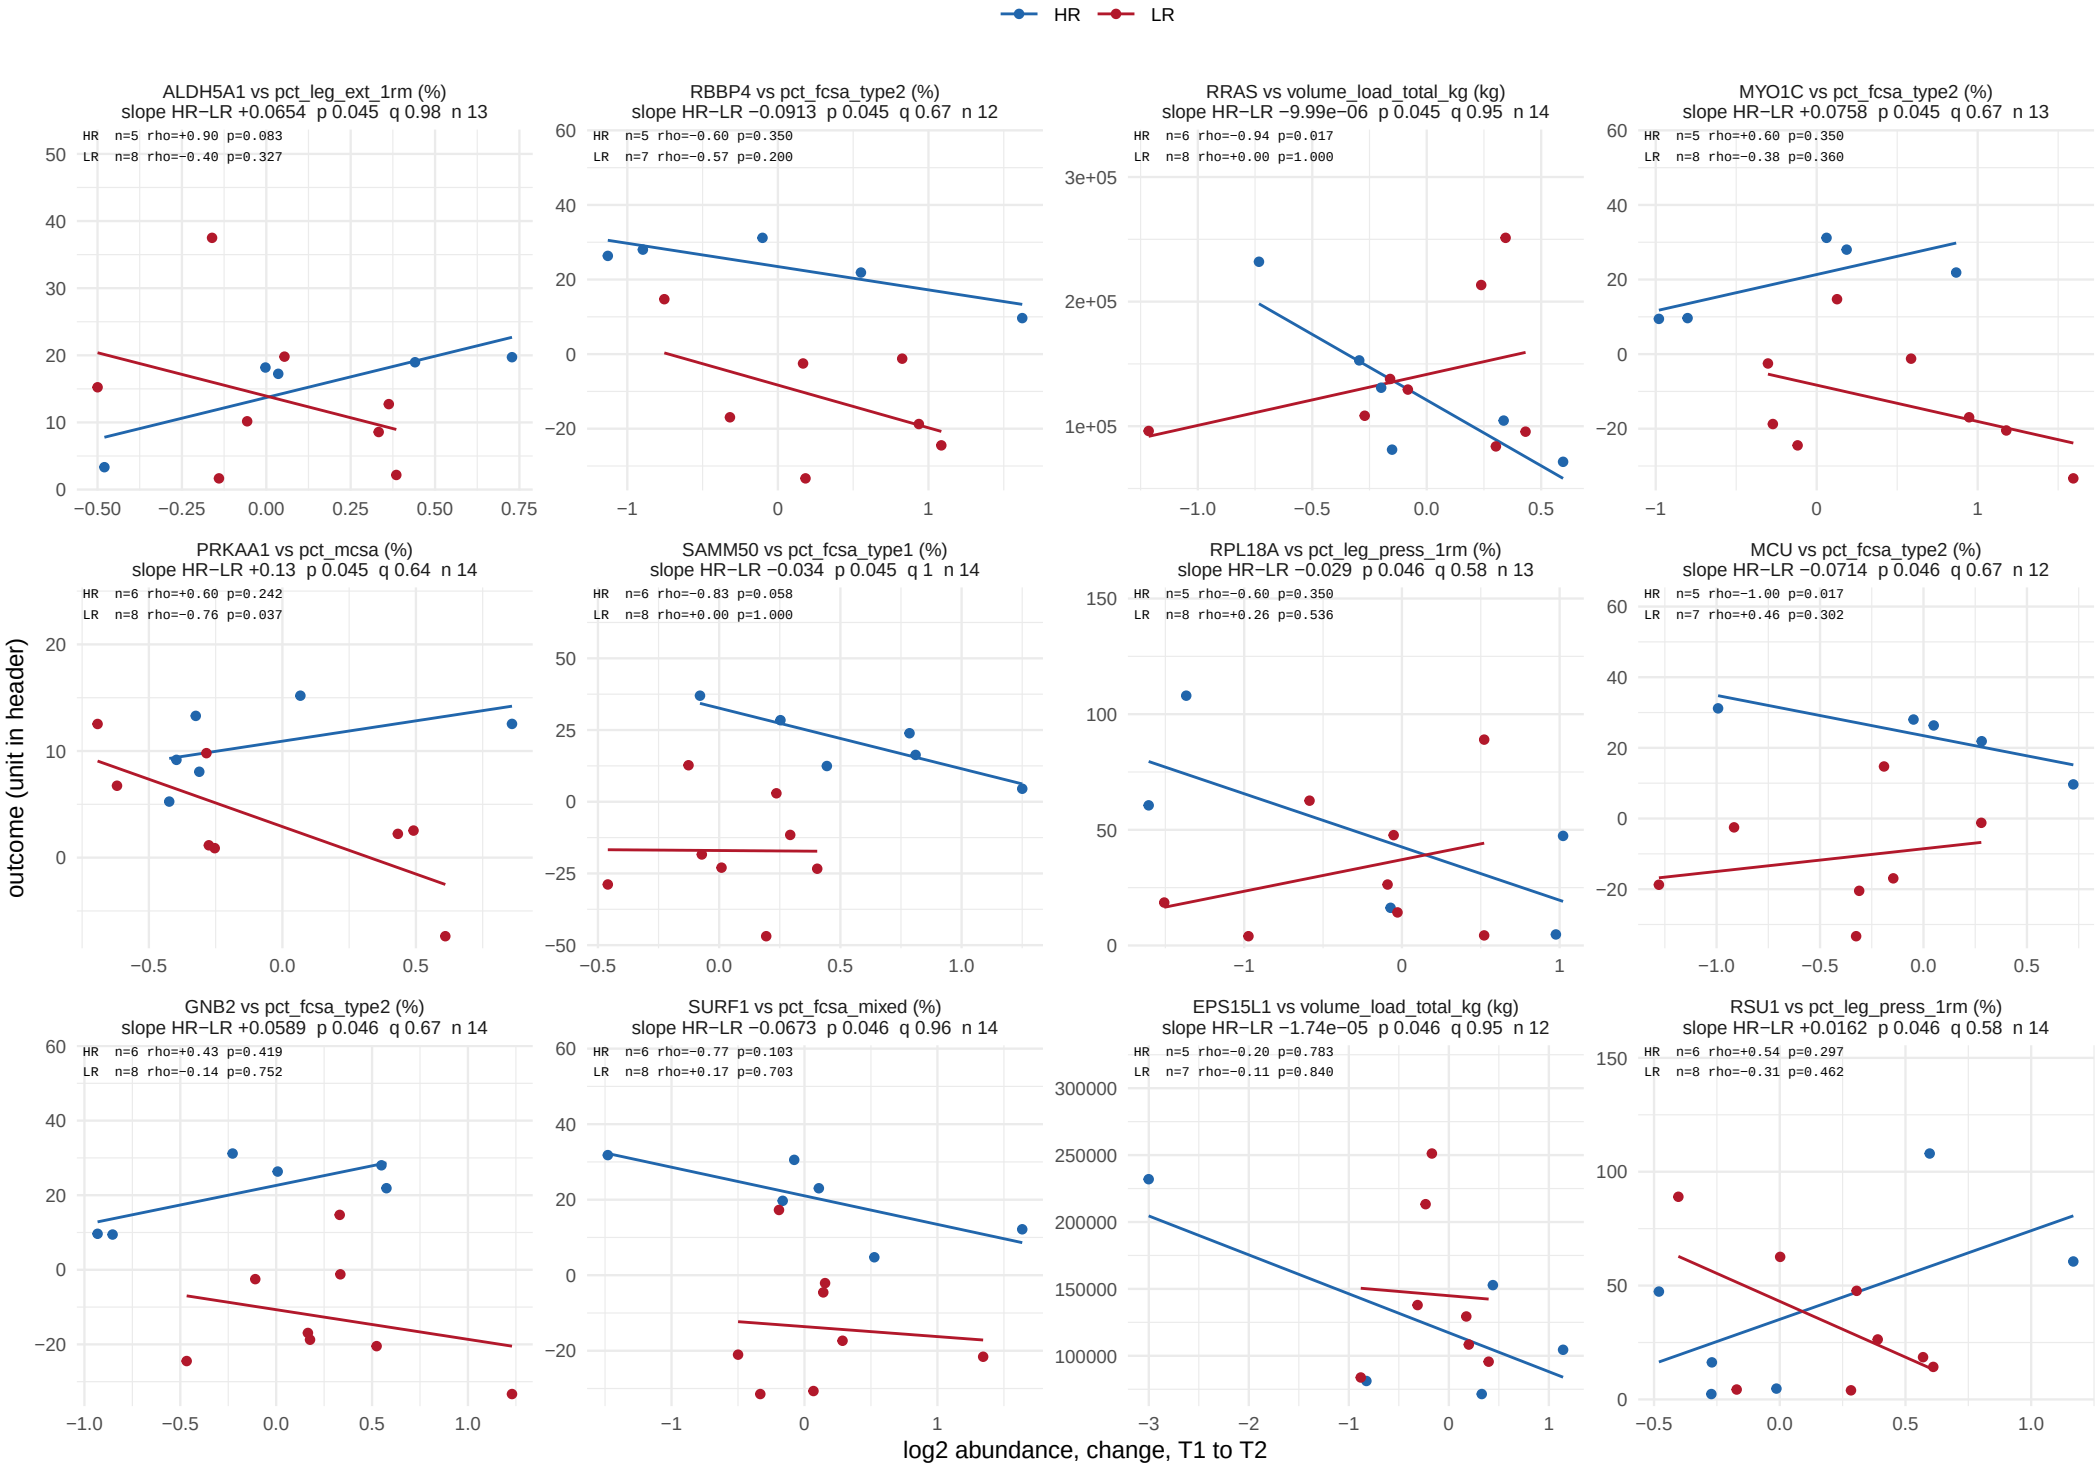

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


444 of 8450 feature−outcome pairs at p < 0.05, 20 at BH < 0.05. Page 35 of 37.

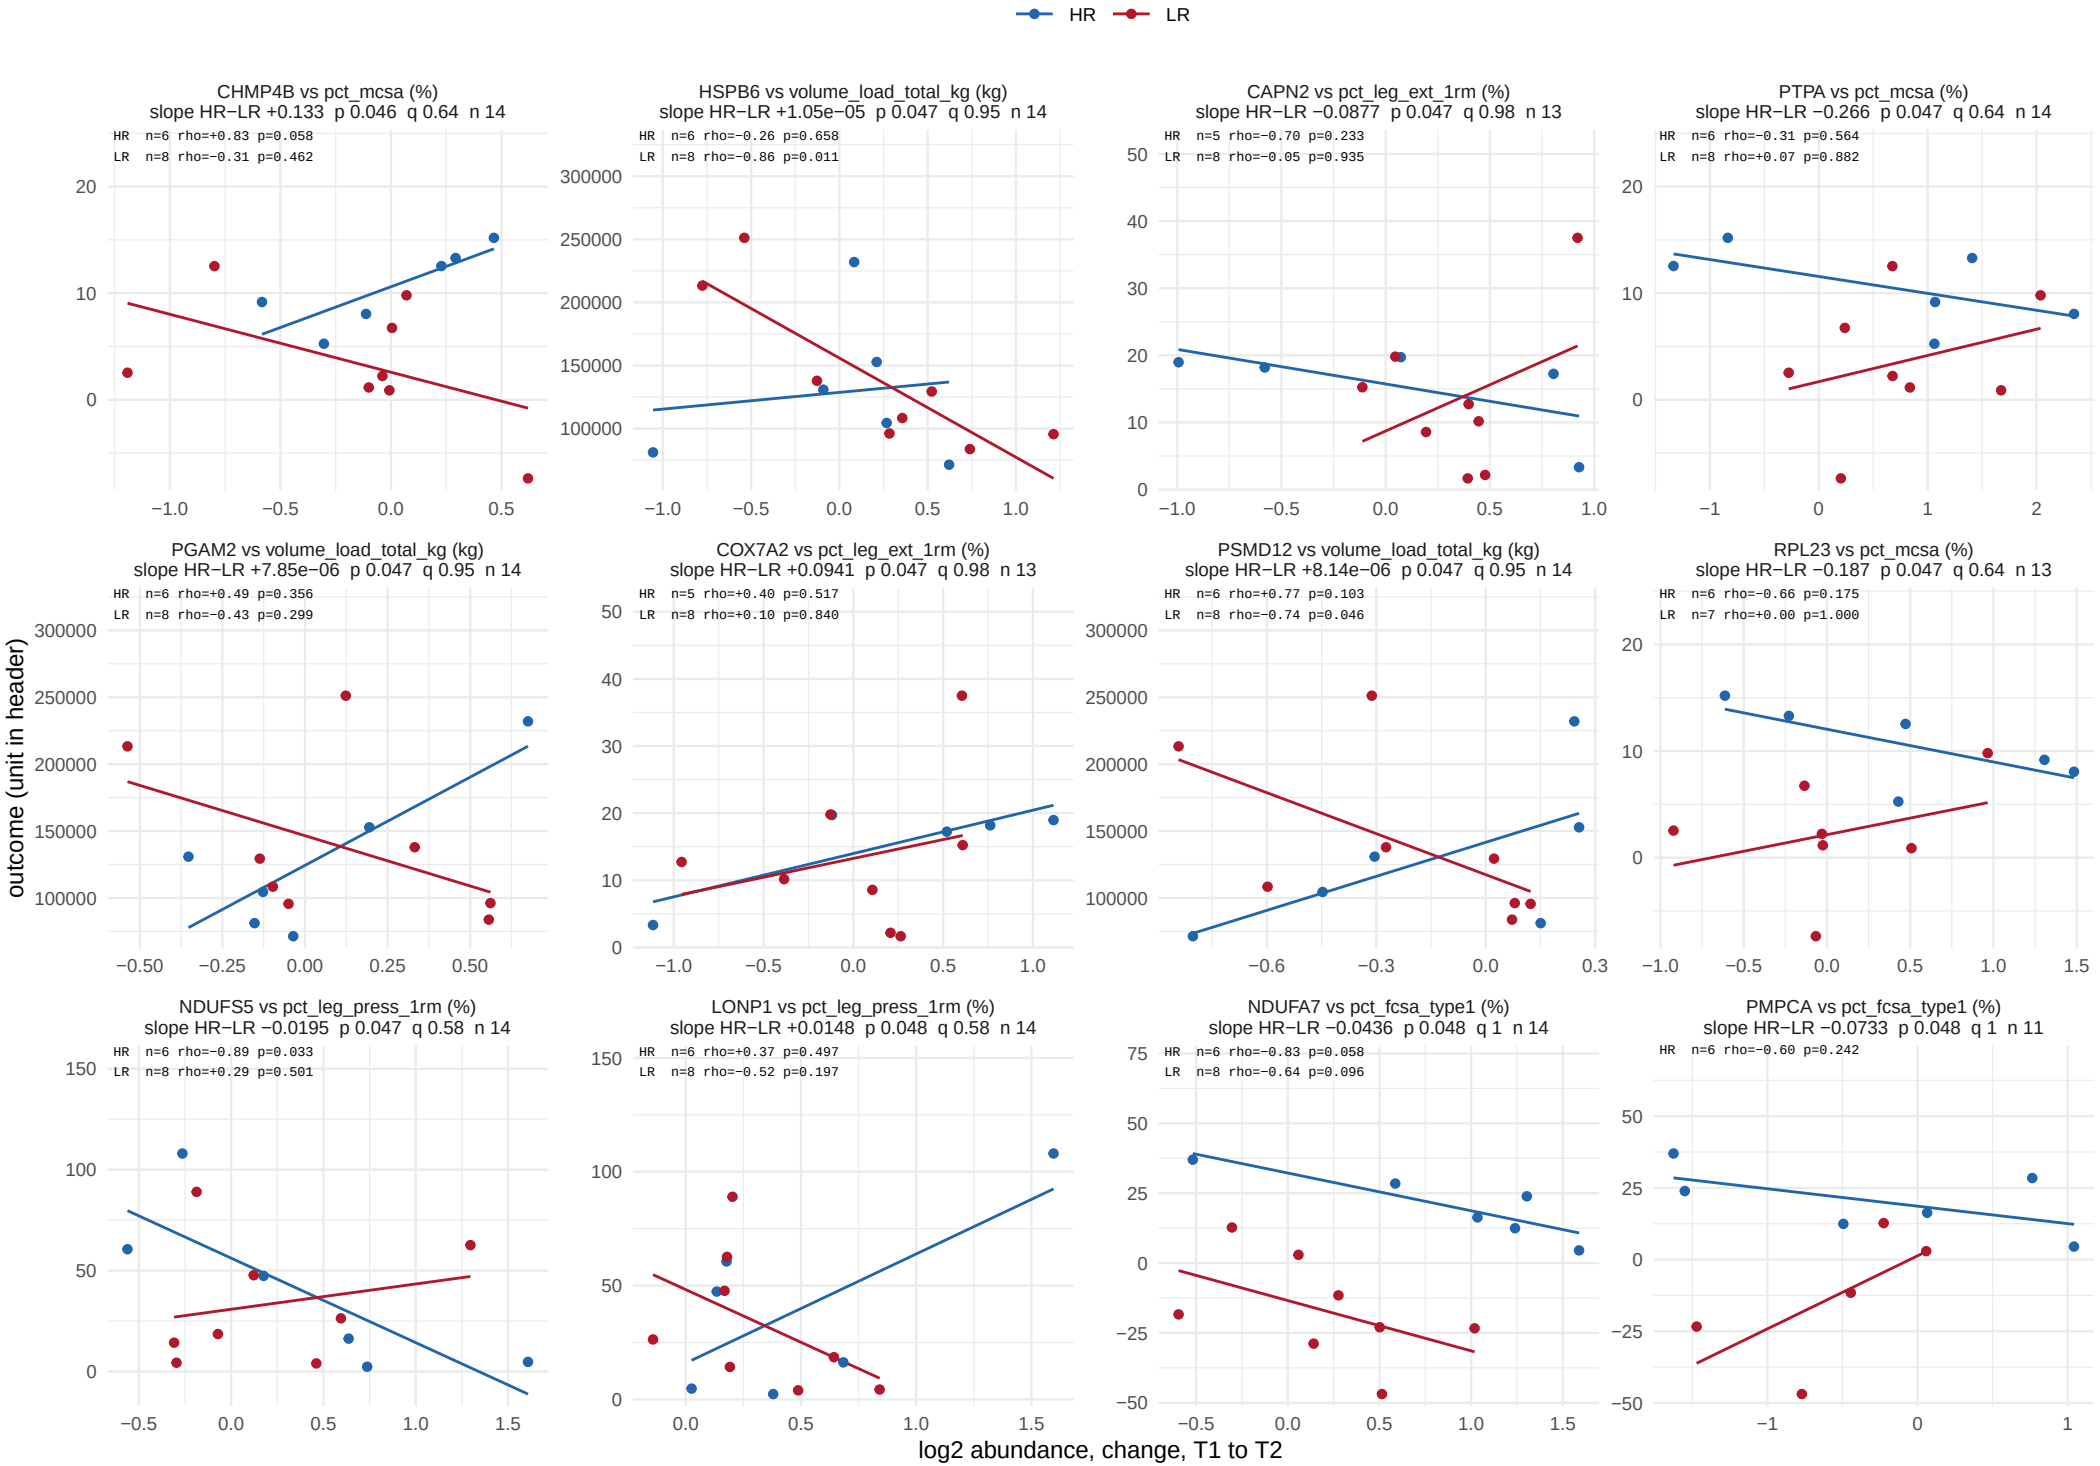

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


444 of 8450 feature−outcome pairs at p < 0.05, 20 at BH < 0.05. Page 36 of 37.

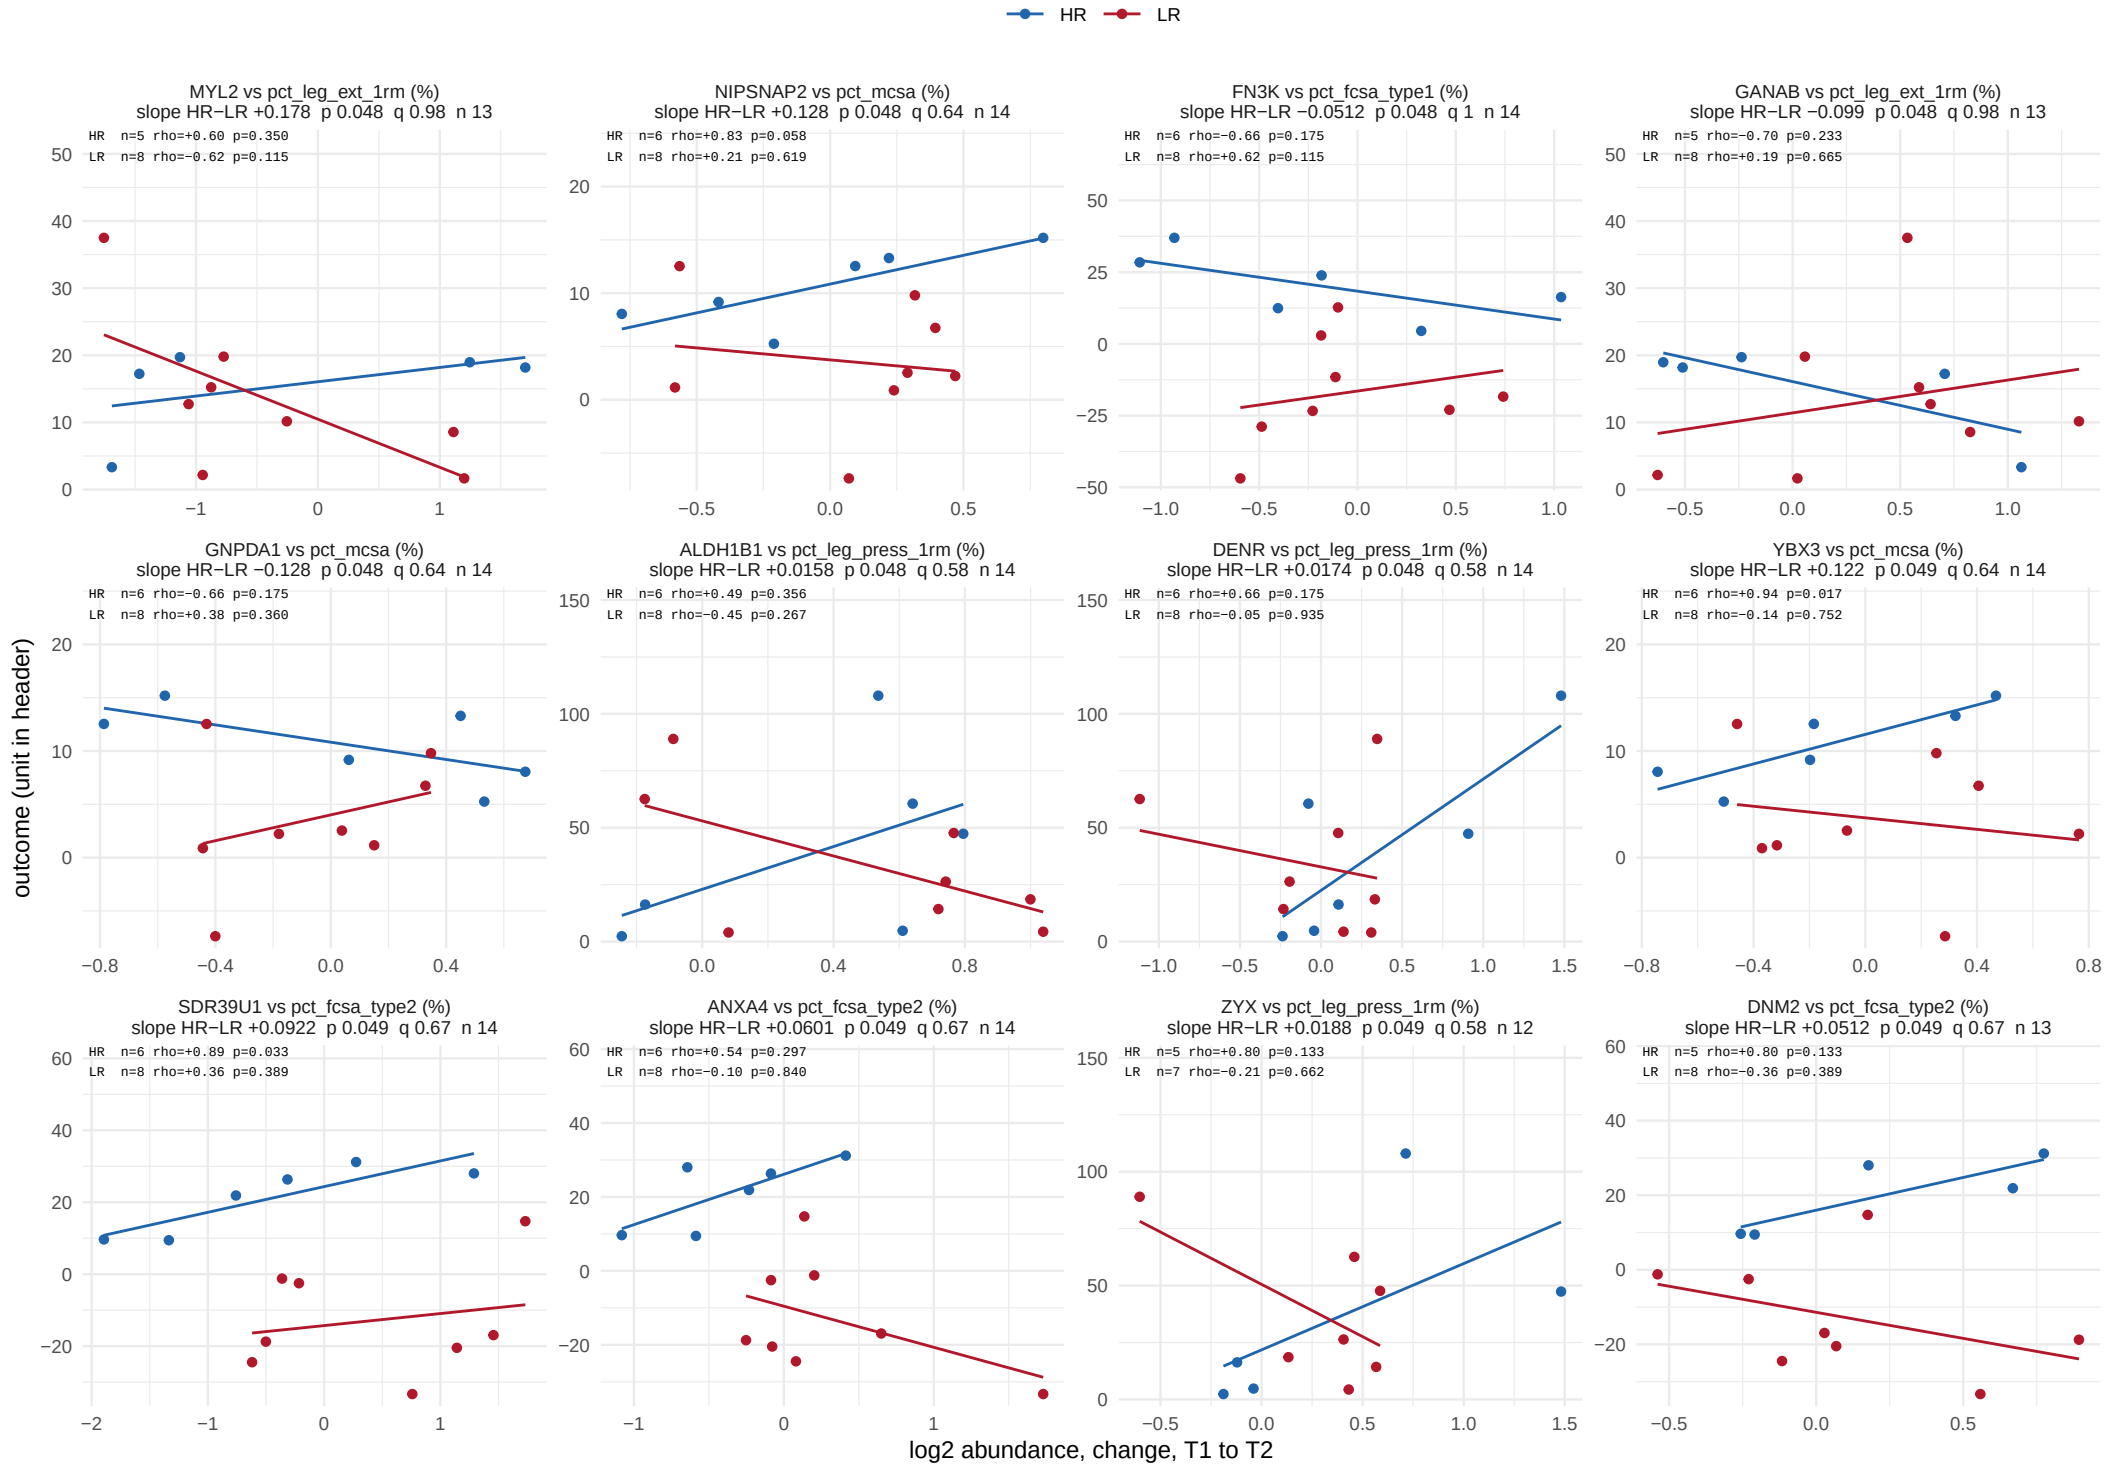

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, training window


444 of 8450 feature−outcome pairs at p < 0.05, 20 at BH < 0.05. Page 37 of 37.

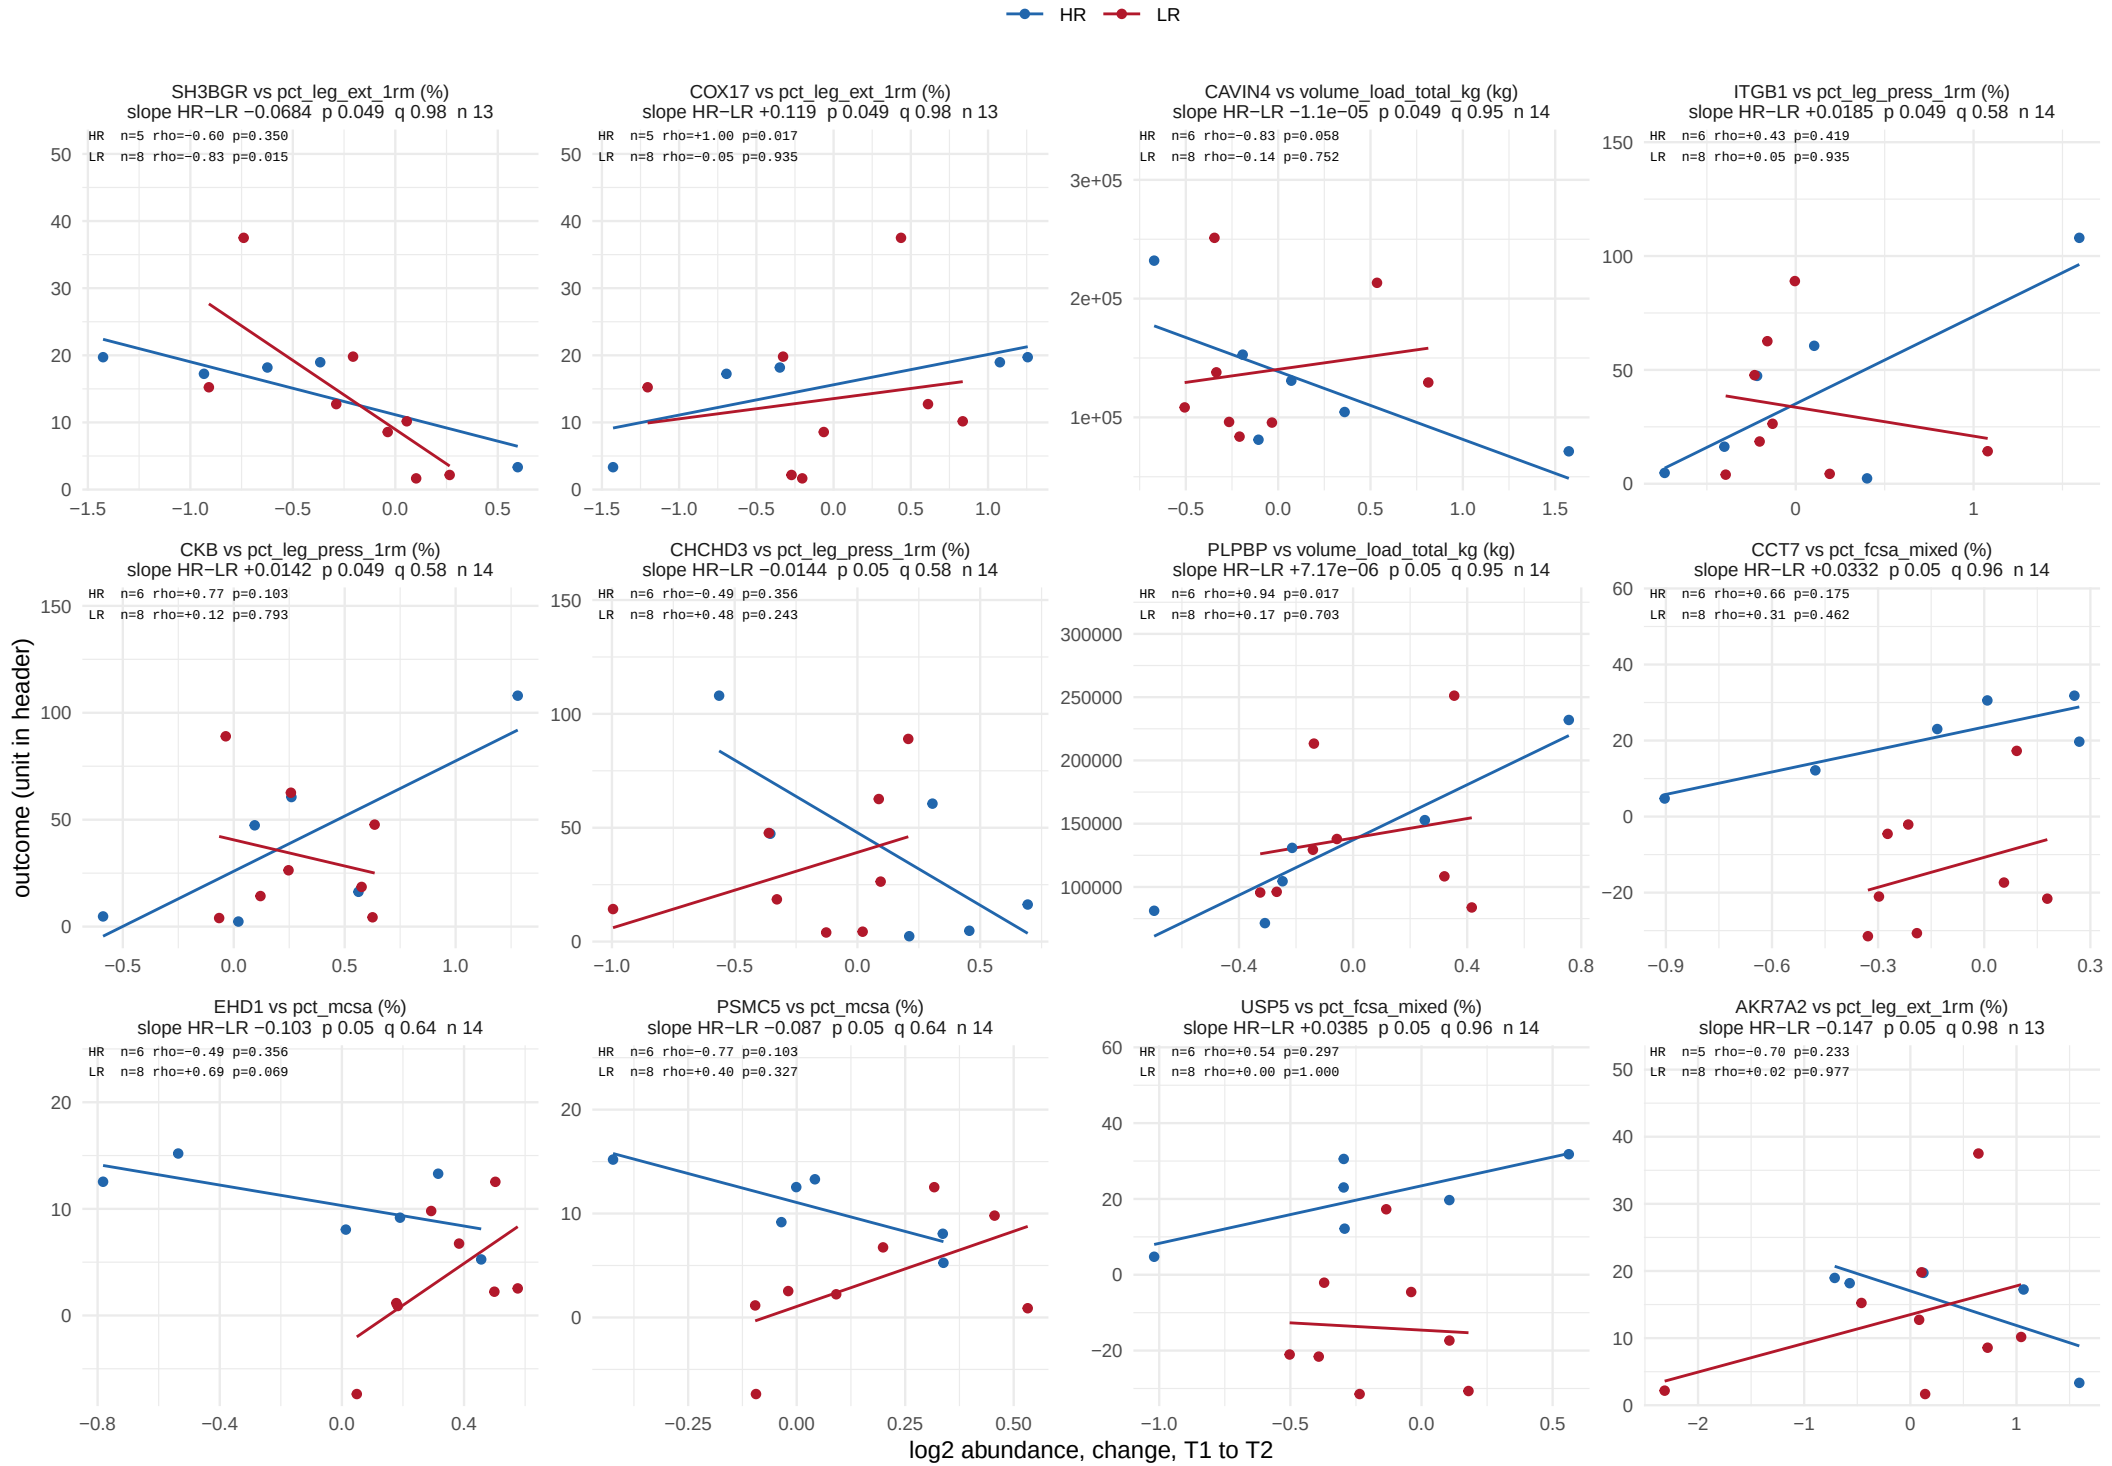

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


451 of 10266 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 1 of 38.

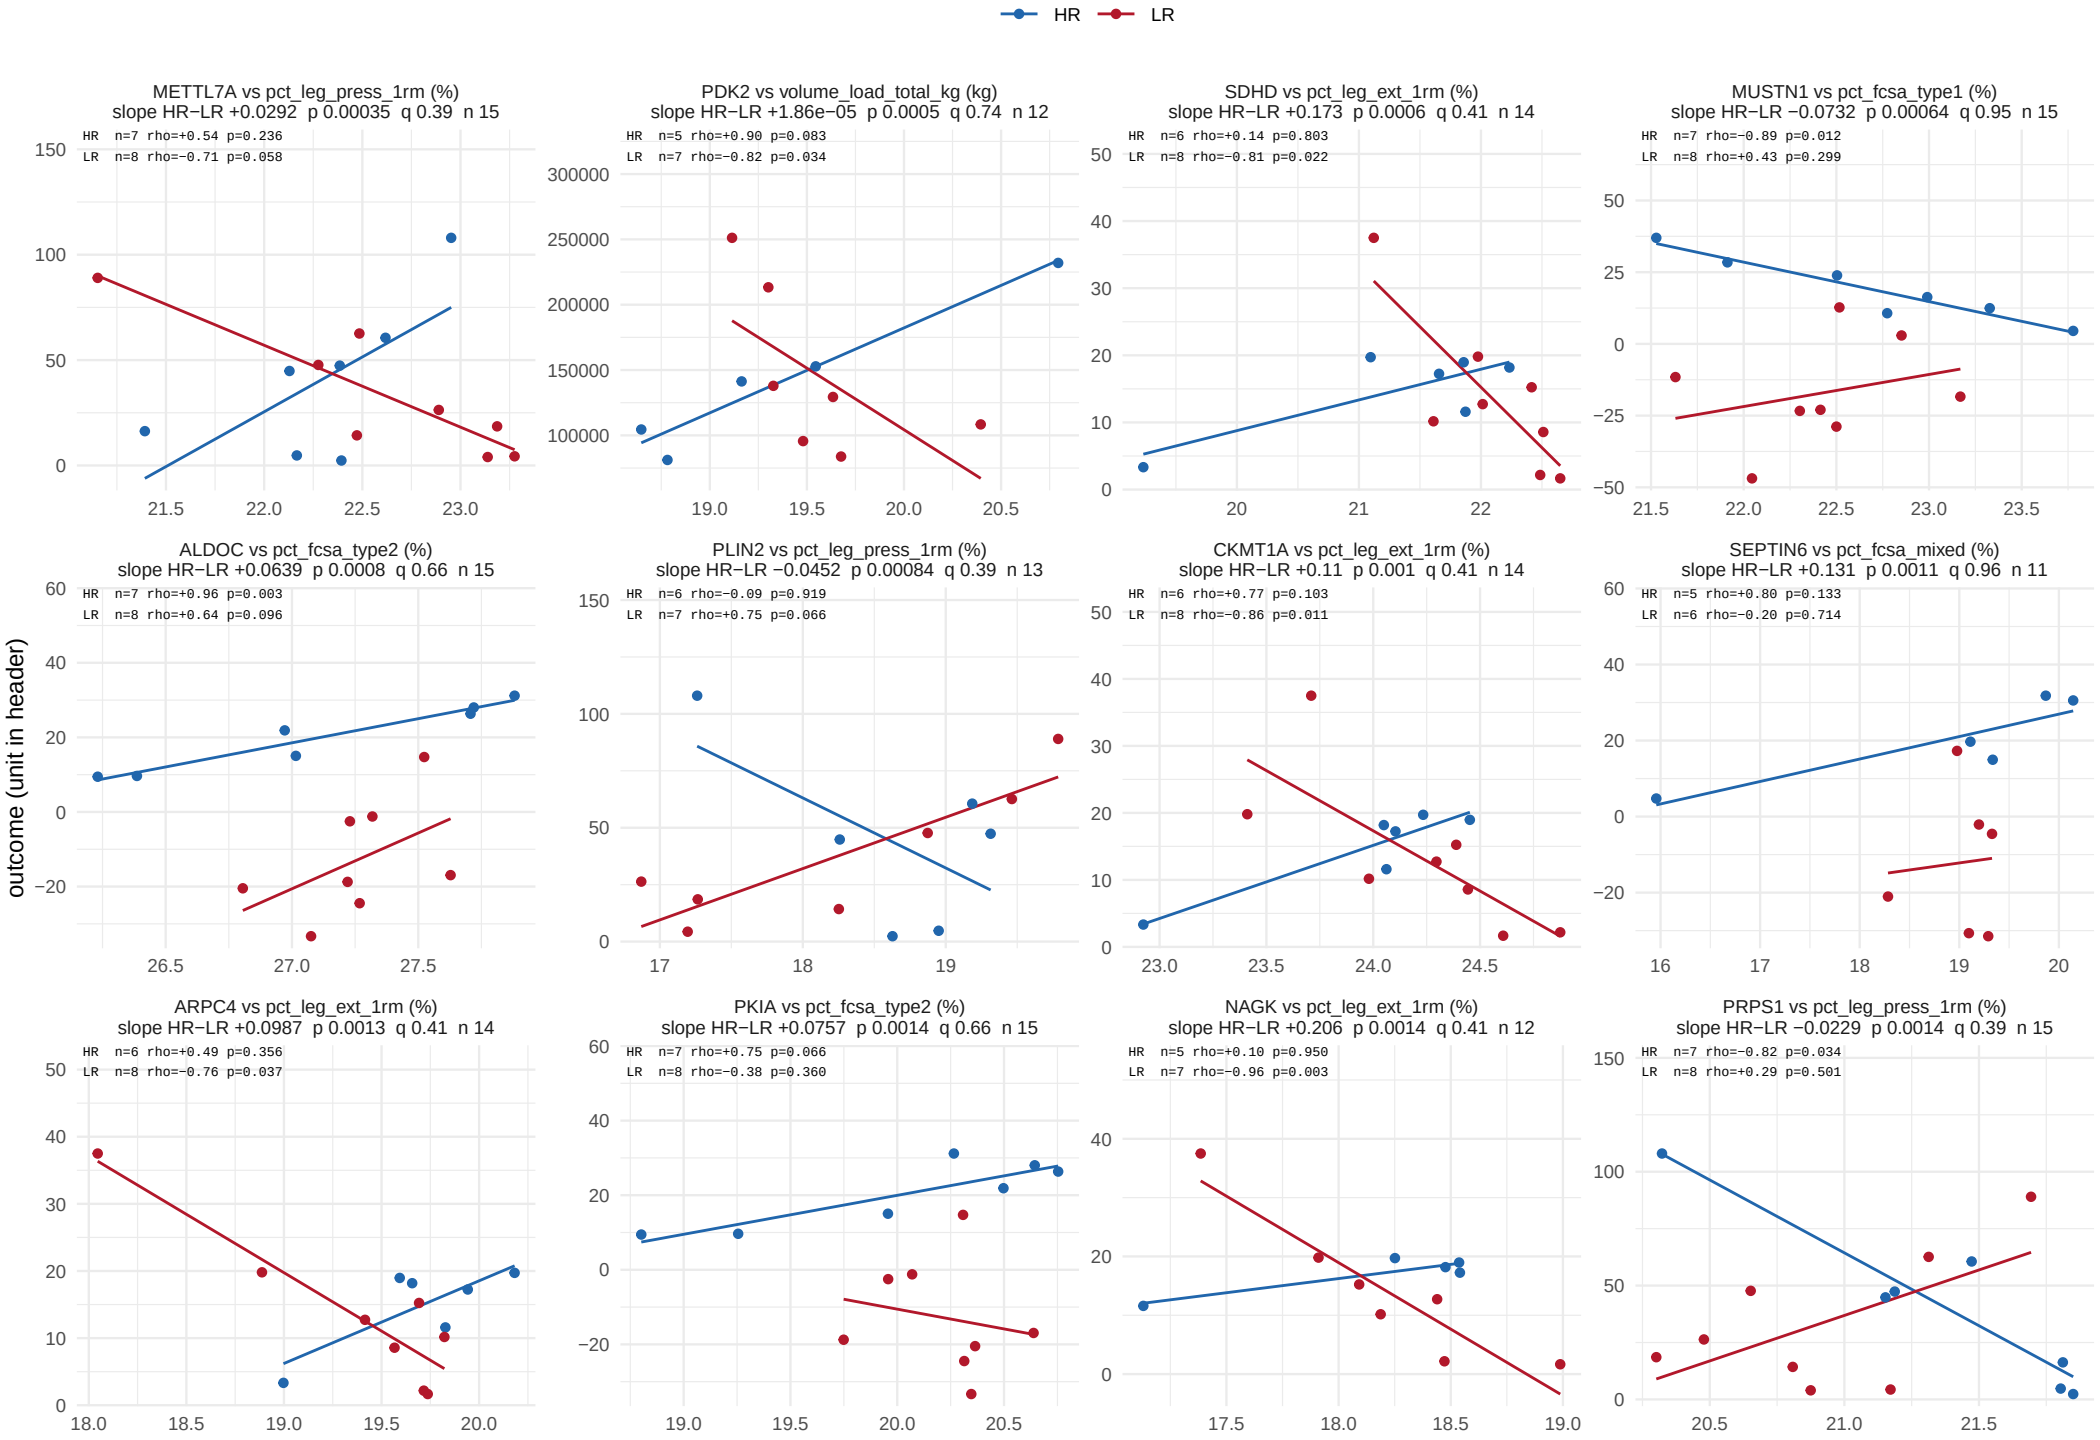

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


451 of 10266 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 2 of 38.

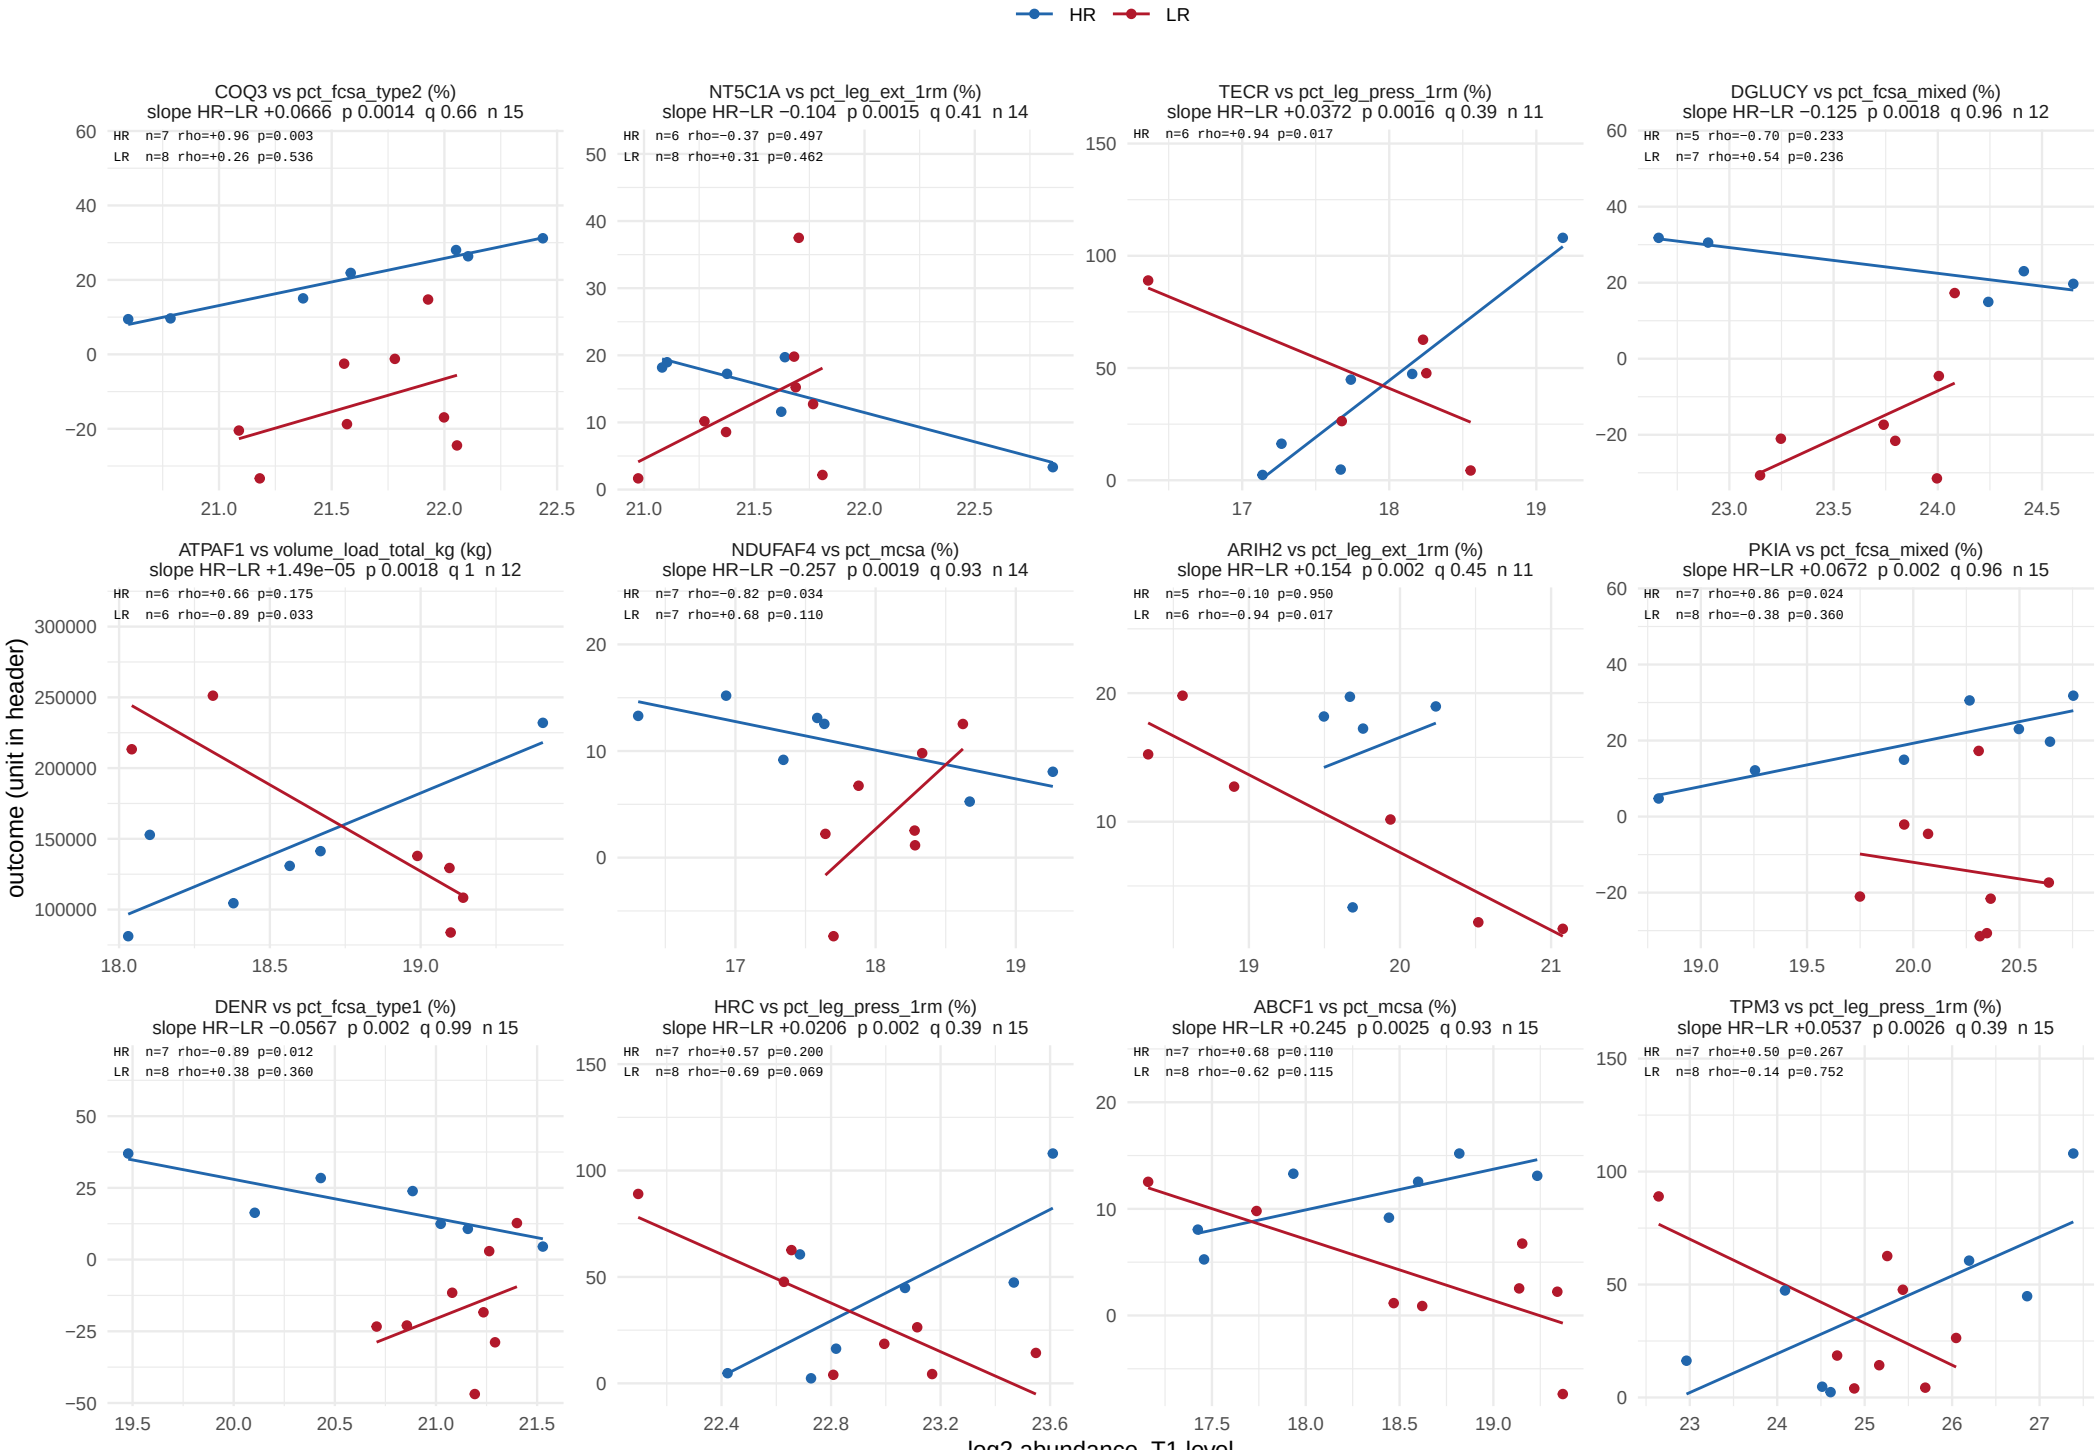

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


451 of 10266 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 3 of 38.

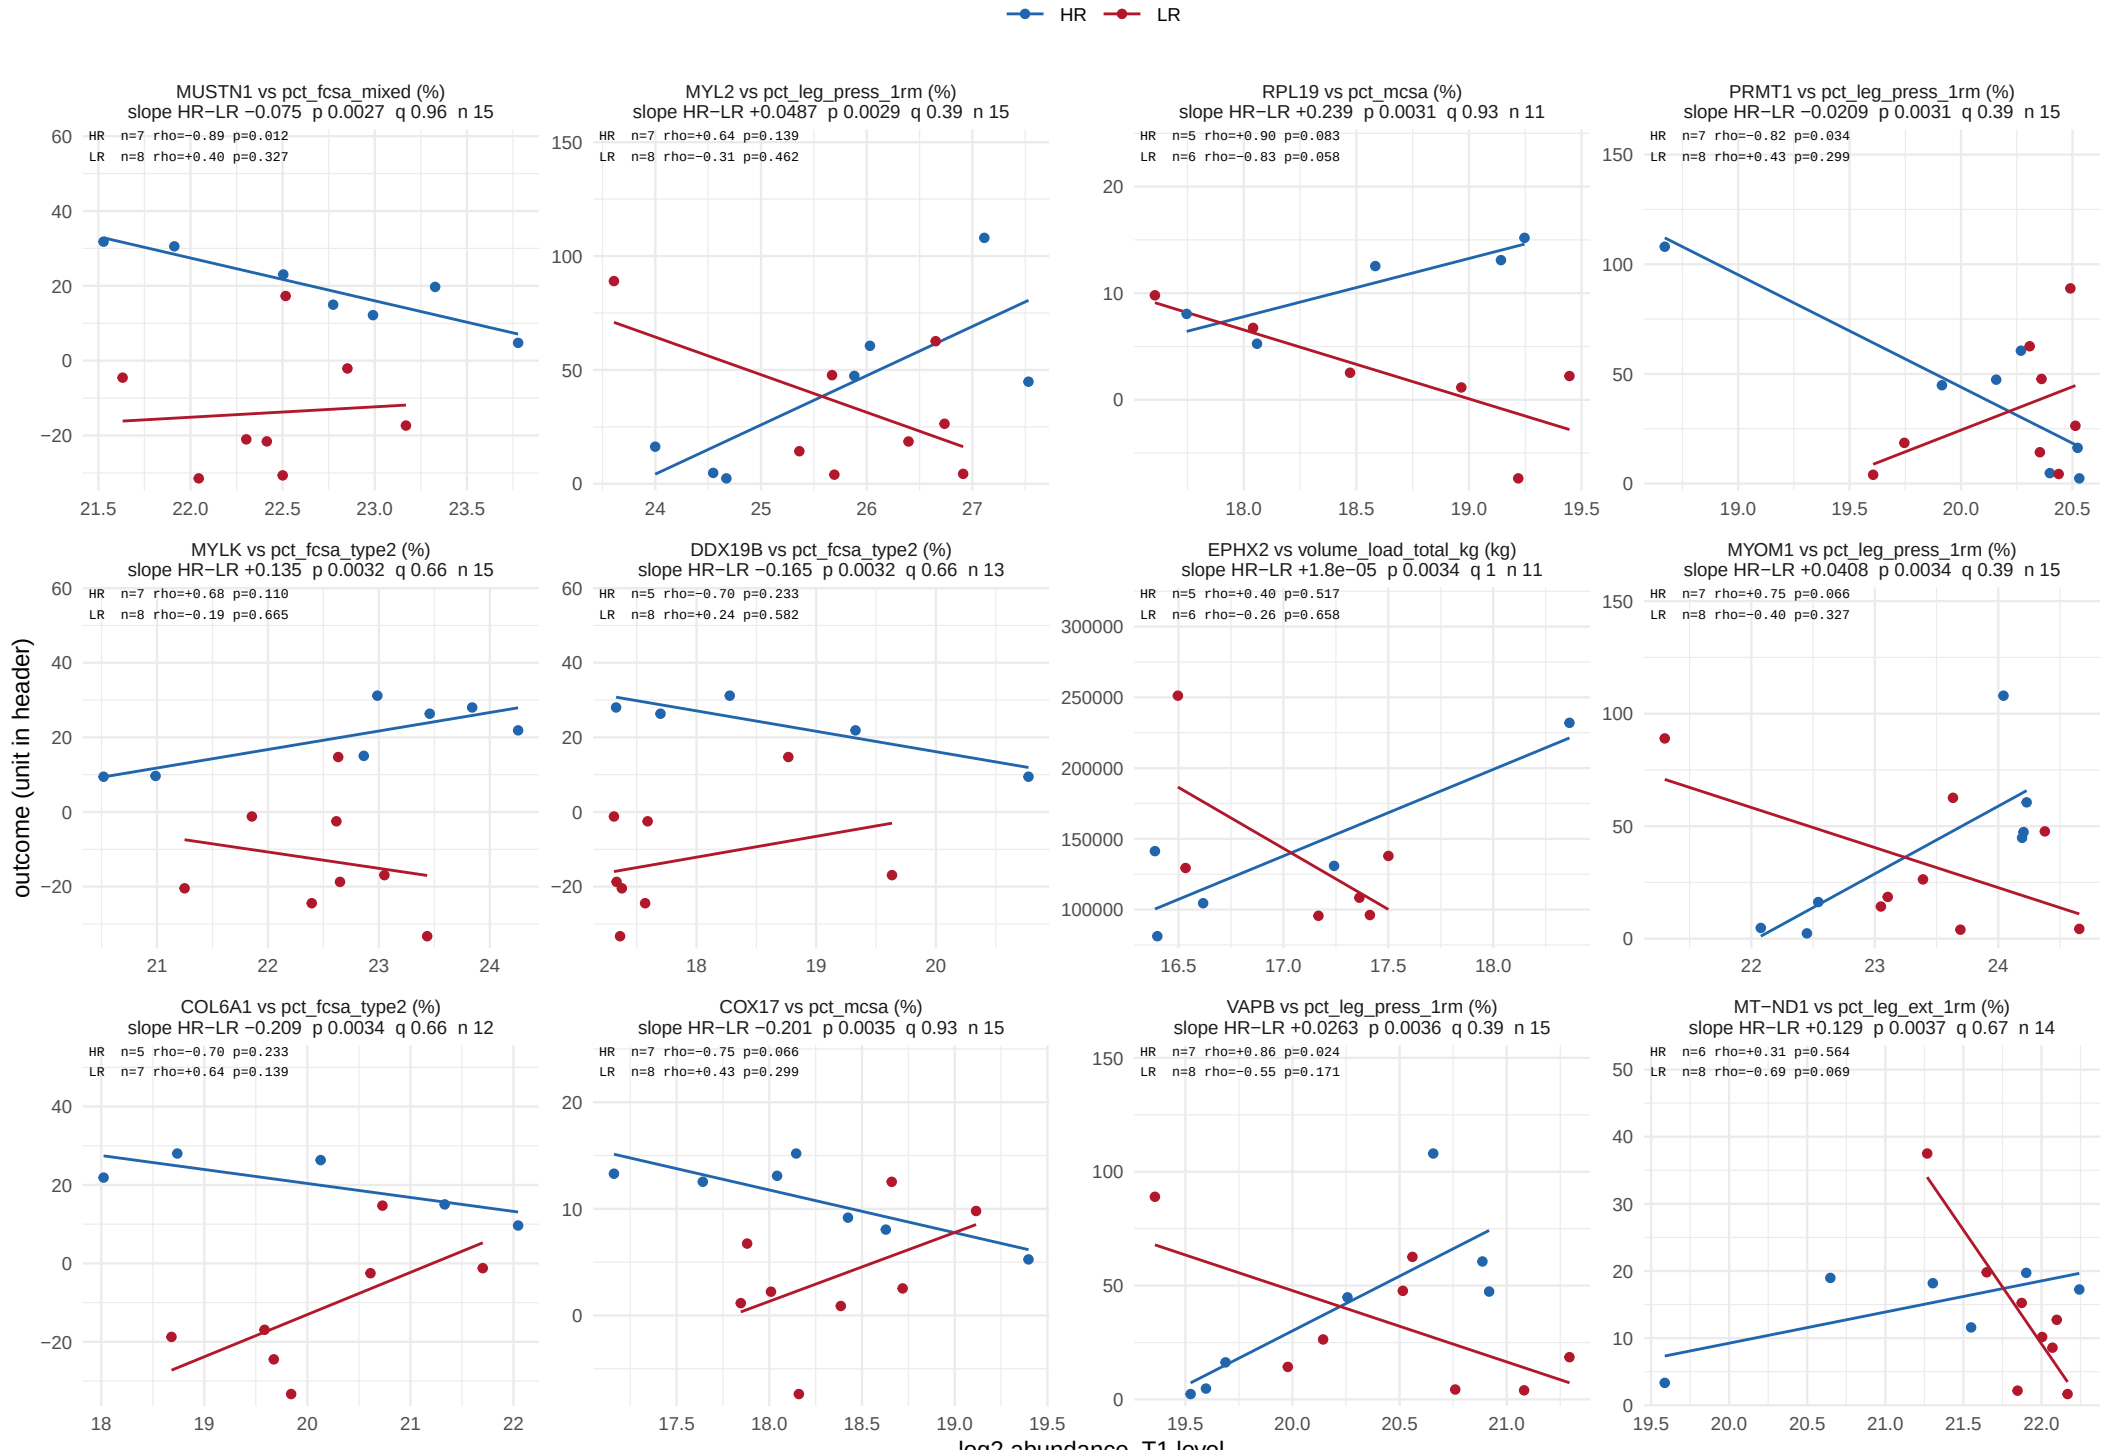

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


451 of 10266 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 4 of 38.

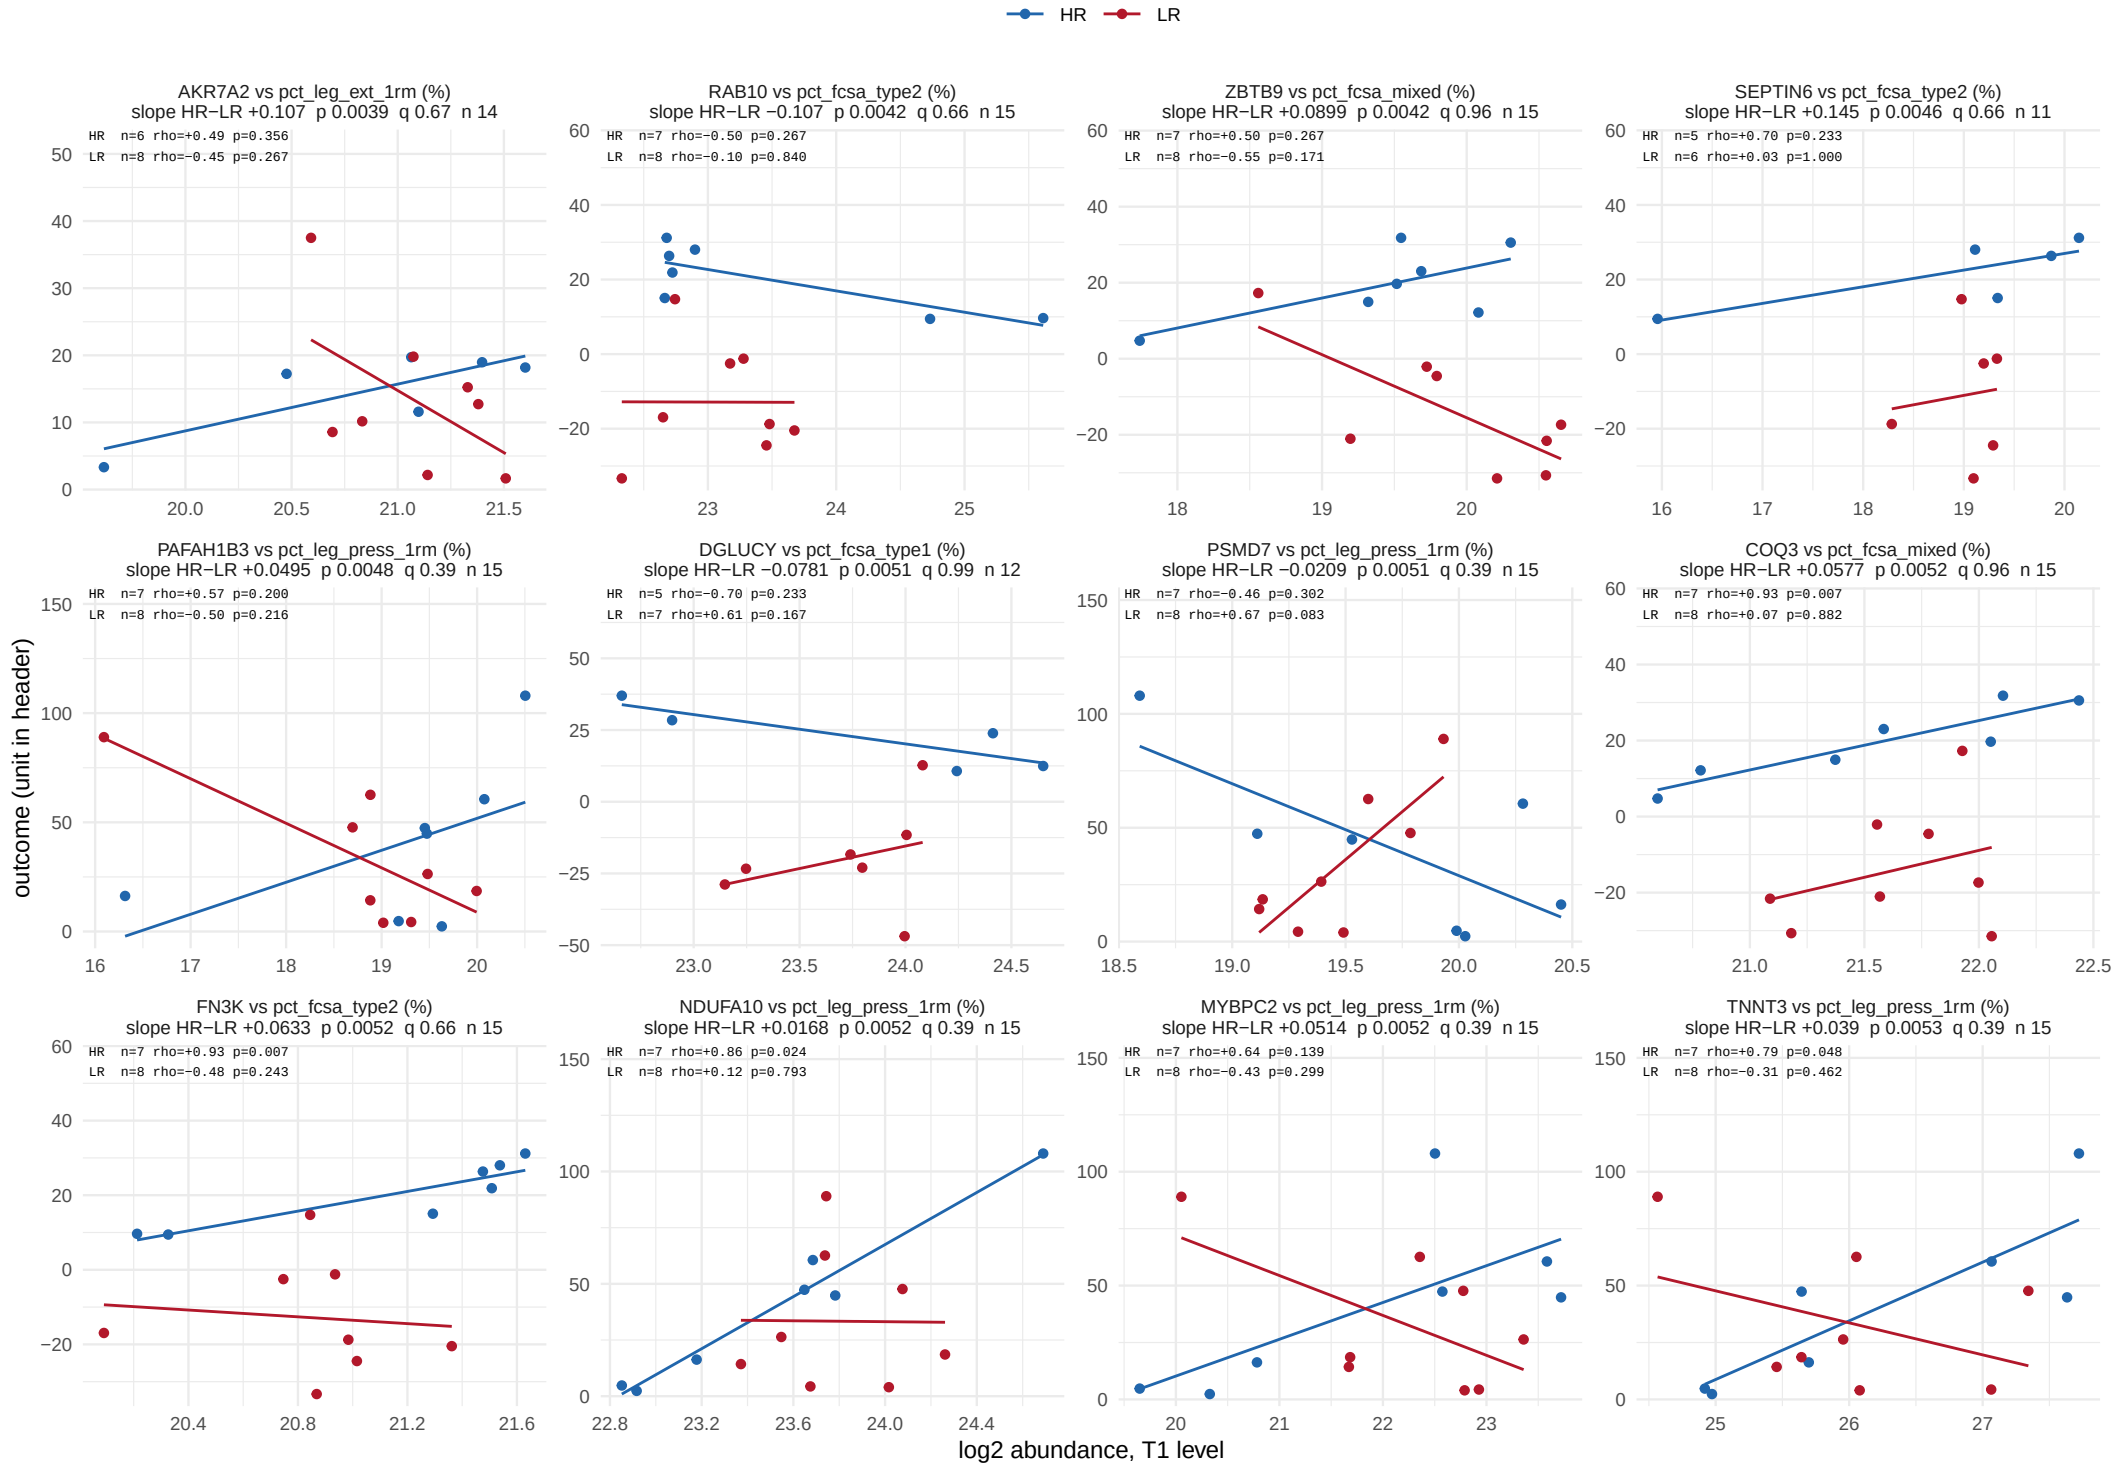

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


451 of 10266 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 5 of 38.

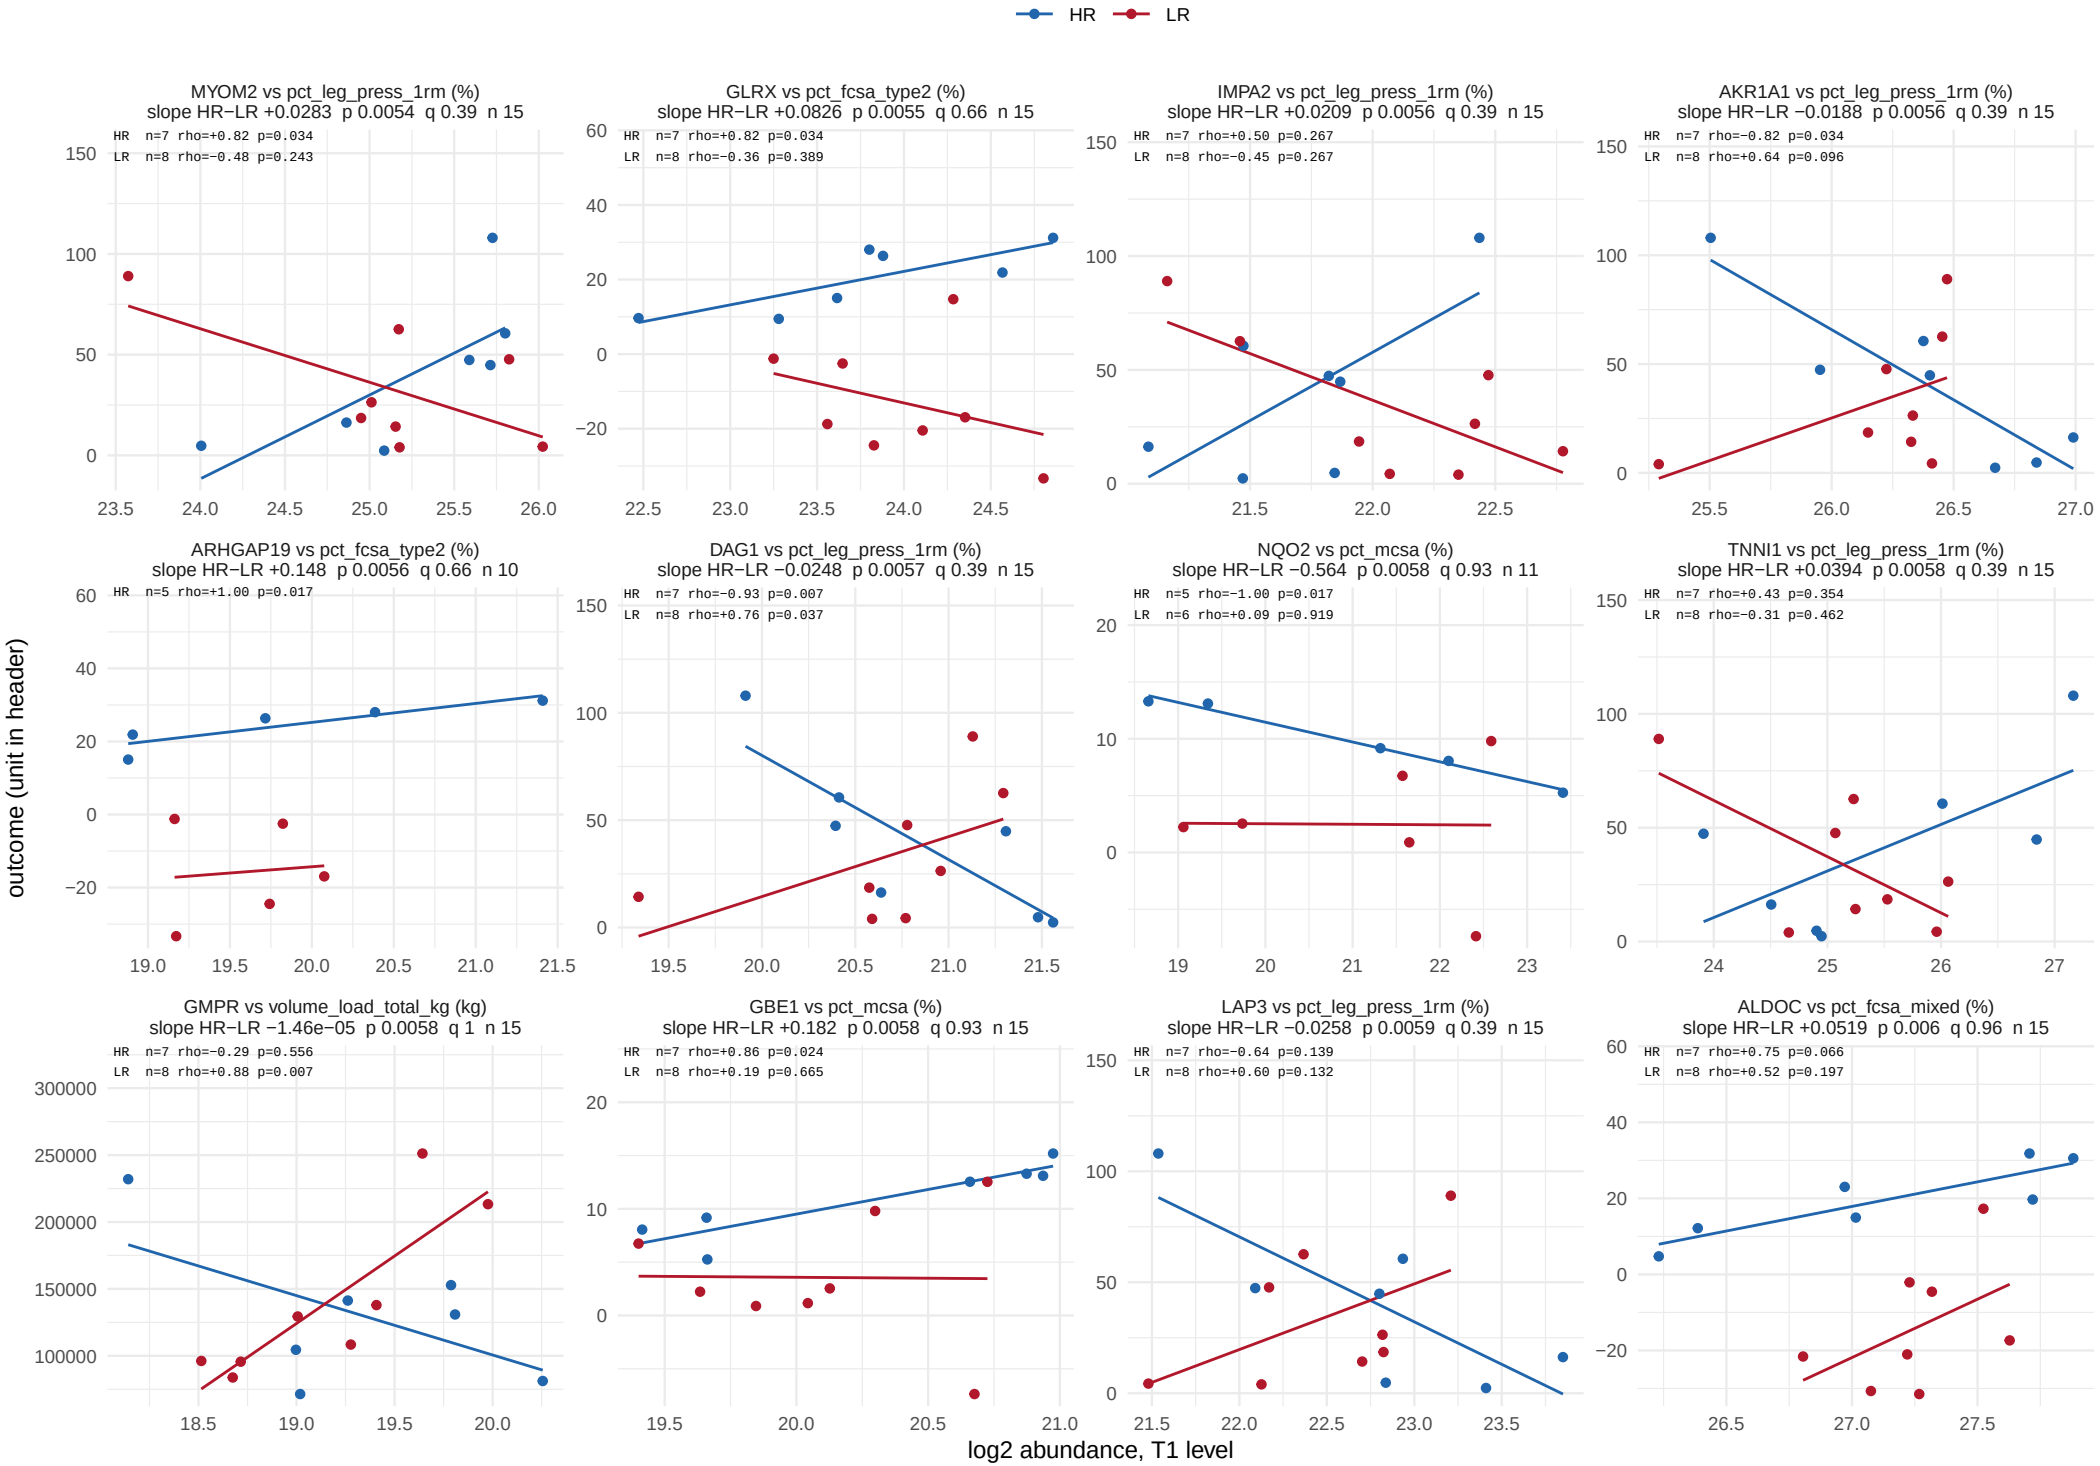

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


451 of 10266 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 6 of 38.

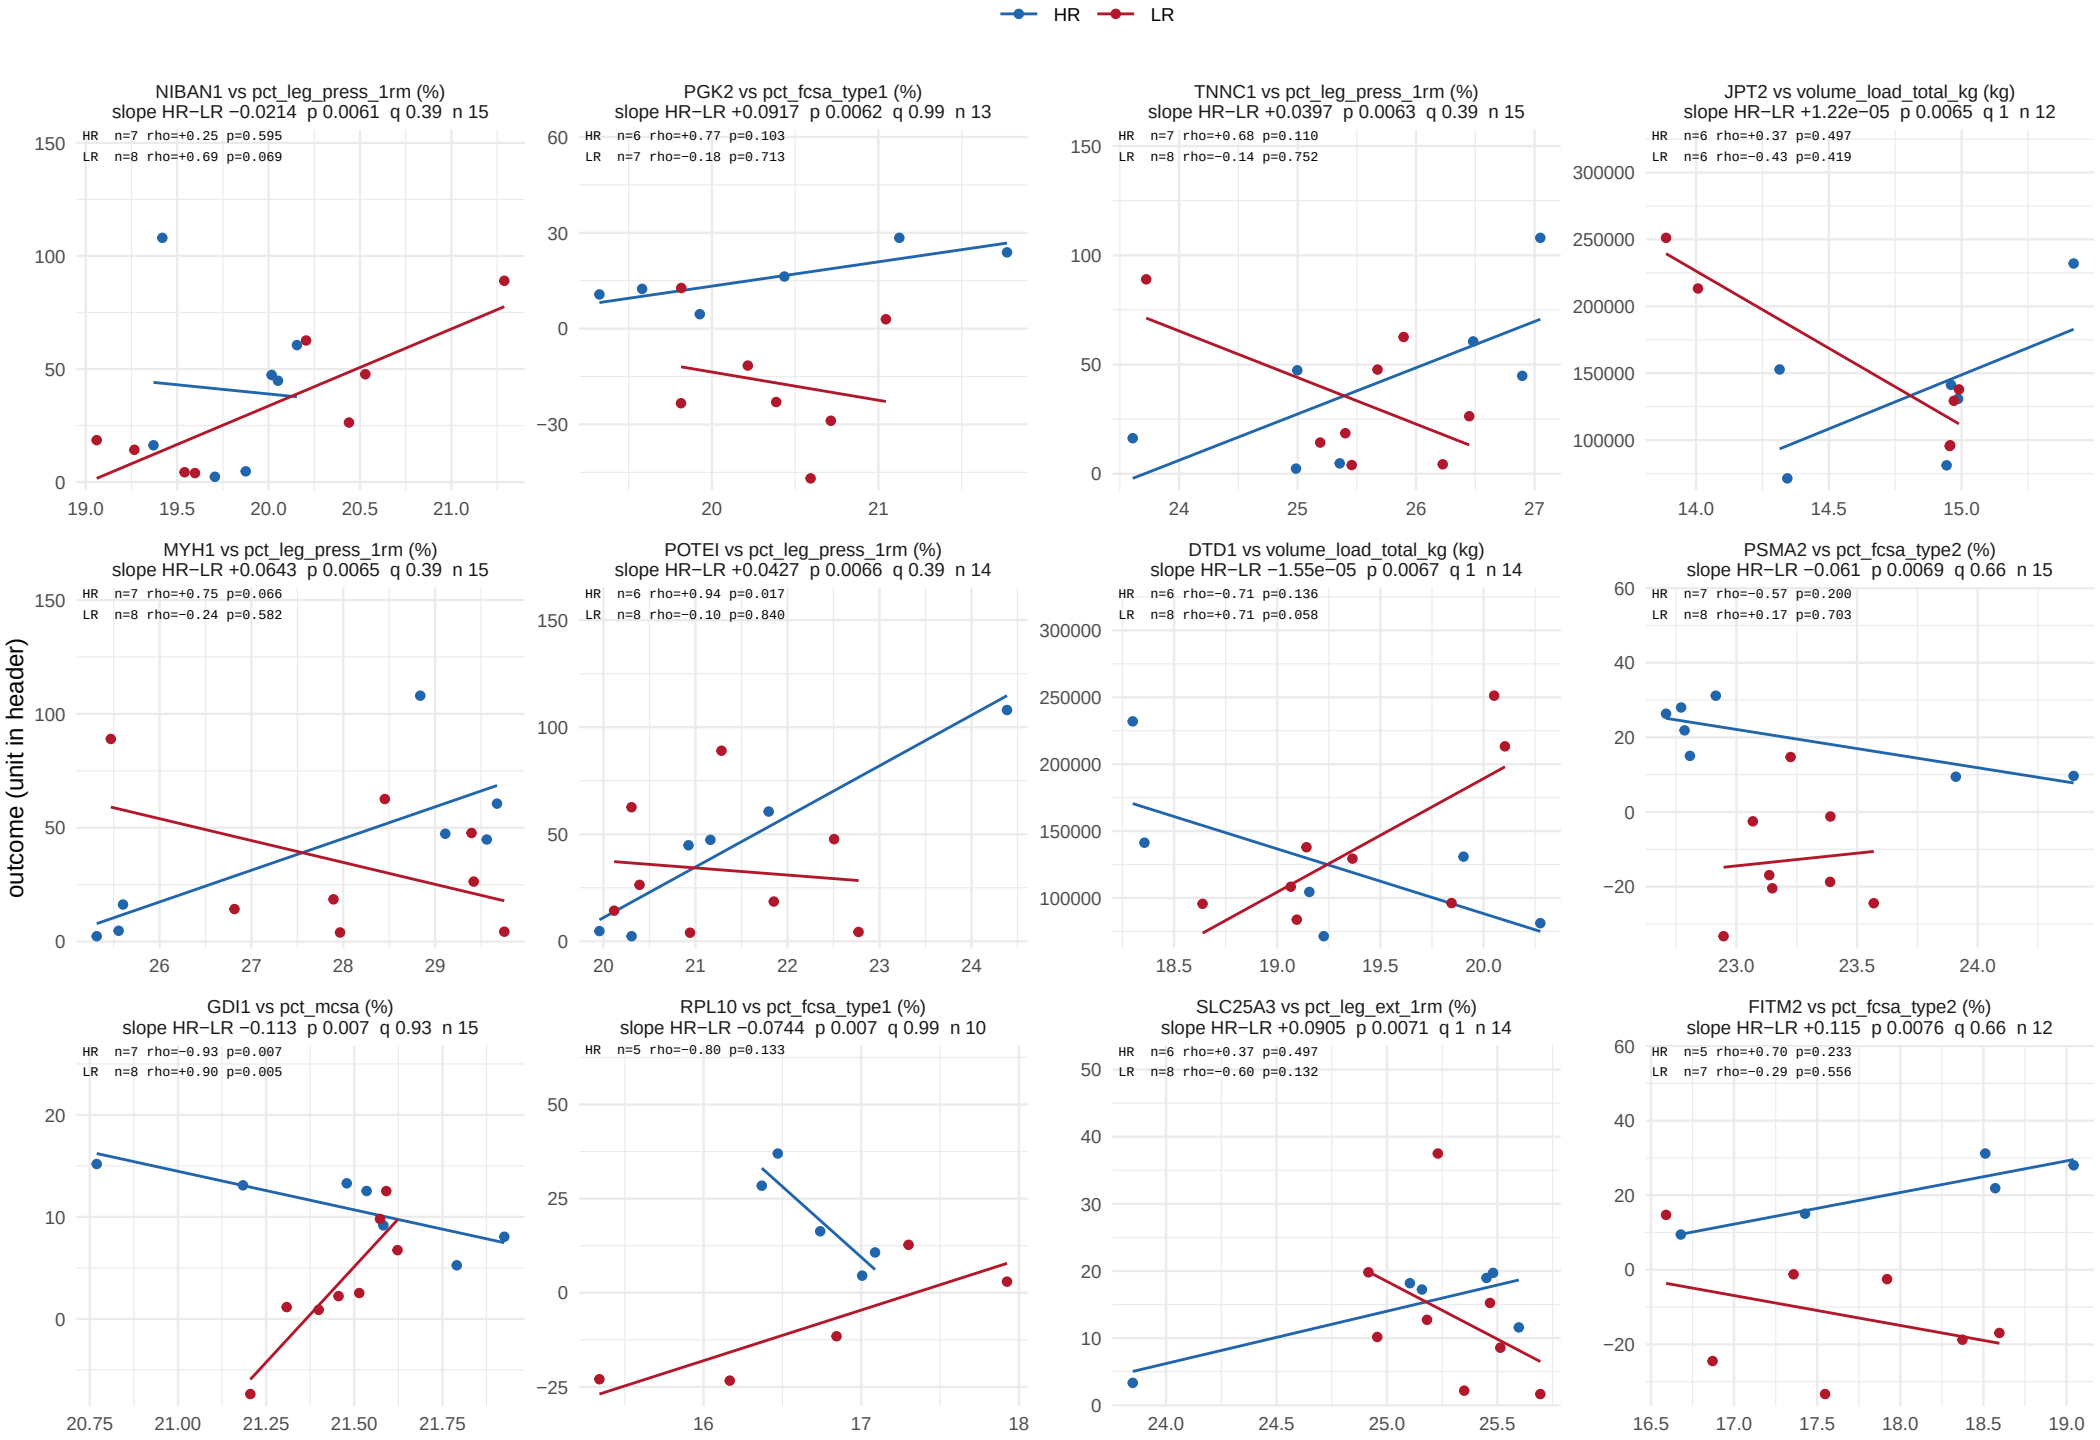

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window

451 of 10266 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 7 of 38.

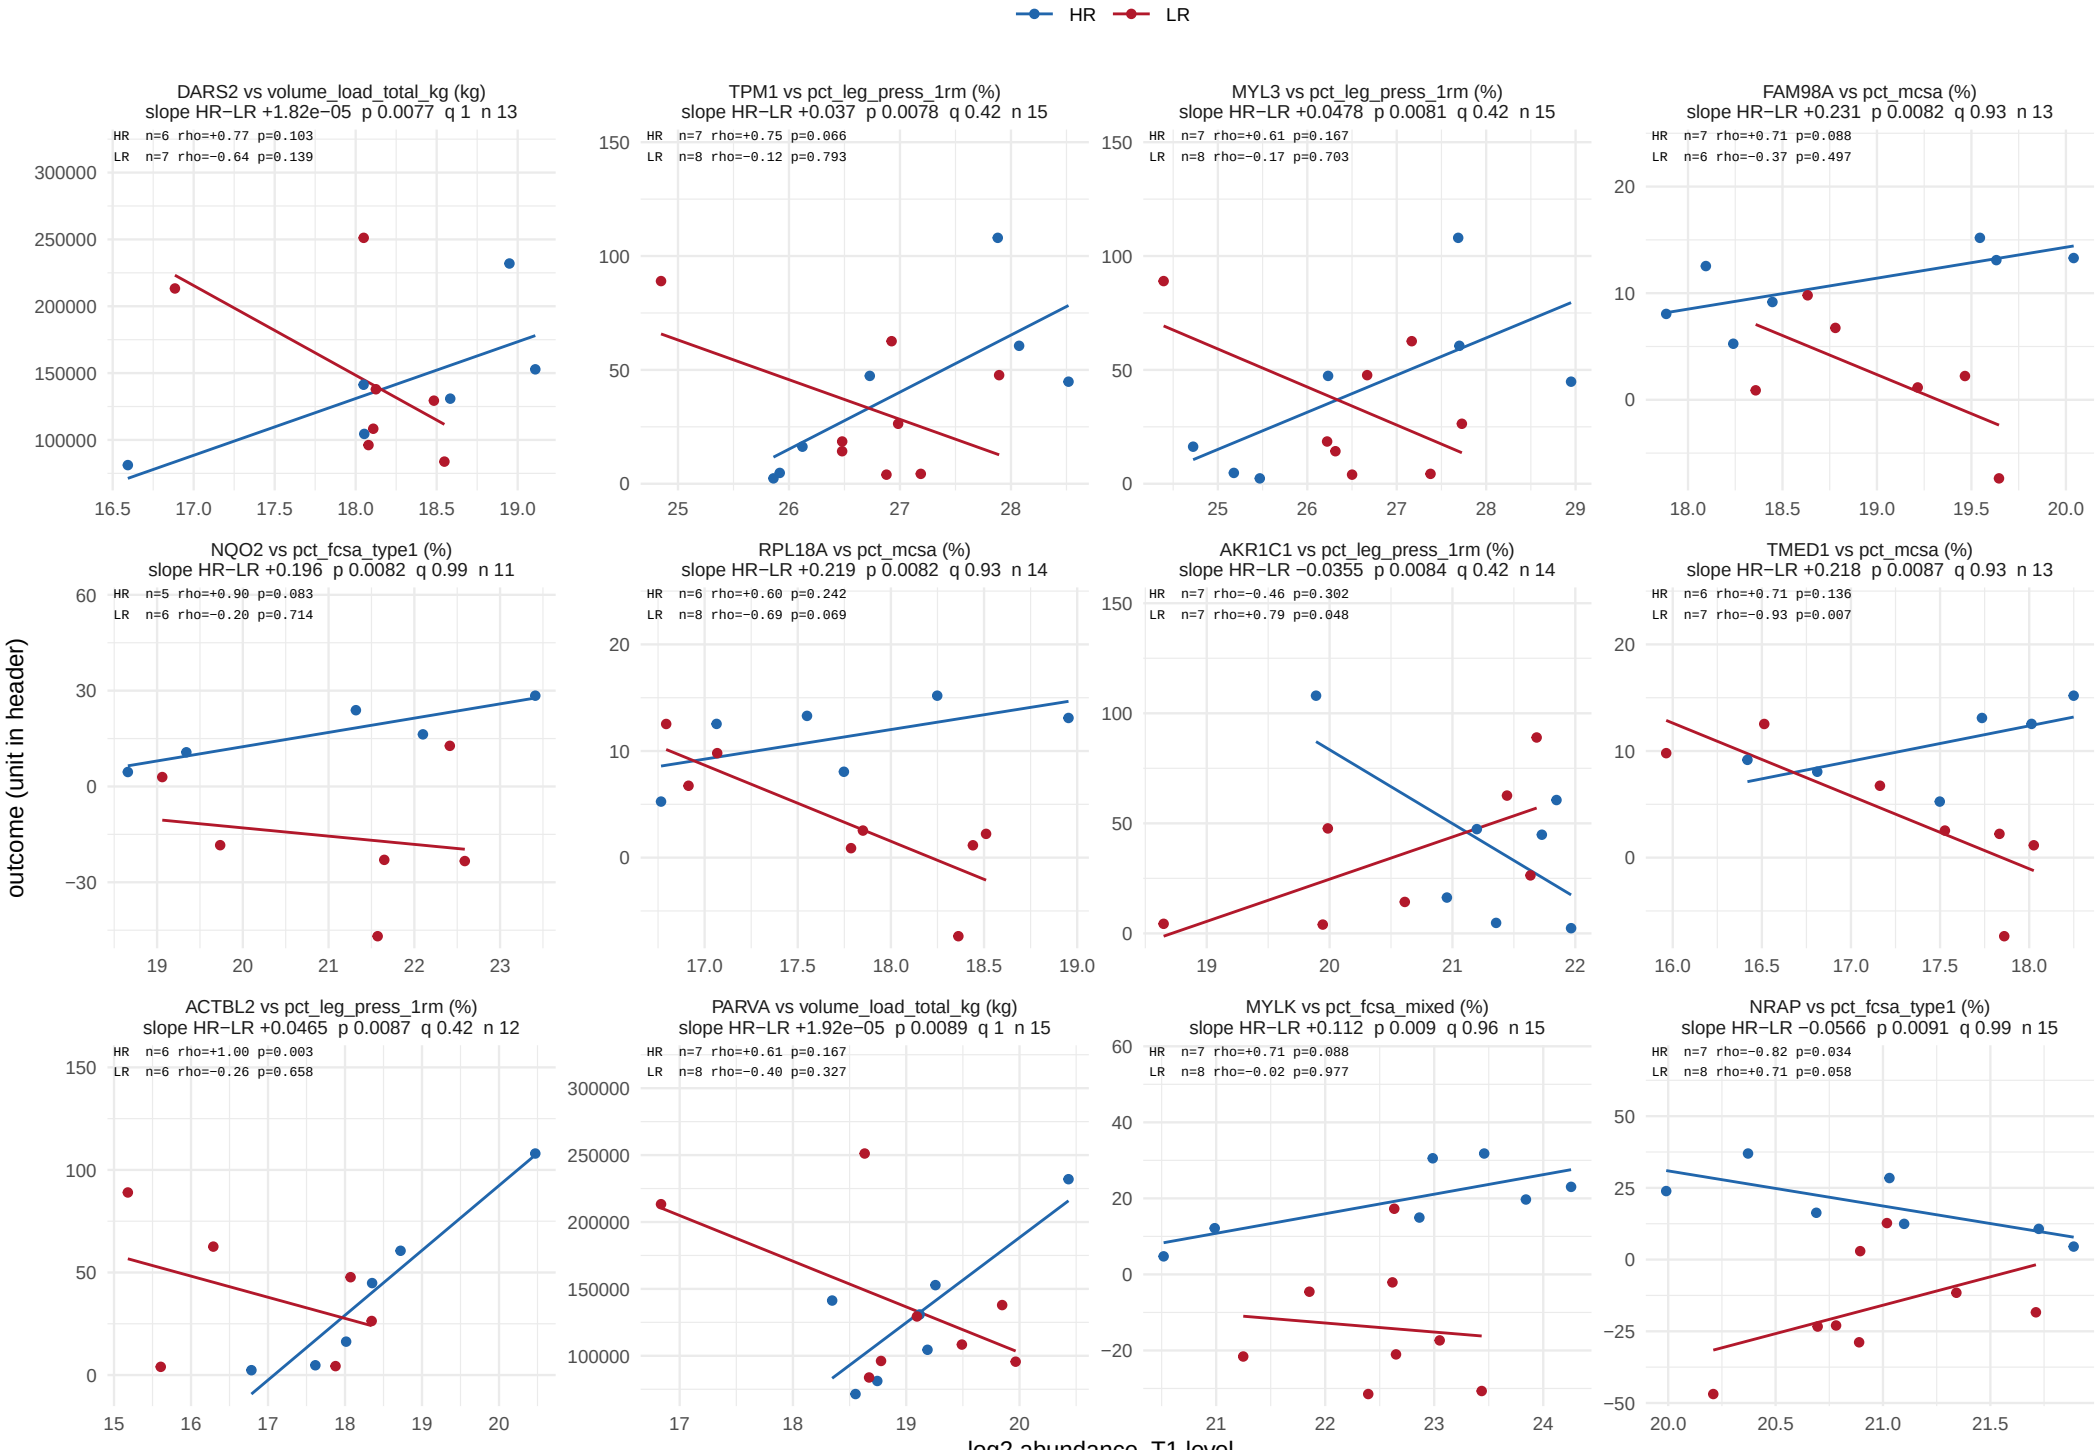

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


451 of 10266 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 8 of 38.



One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


451 of 10266 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 9 of 38.

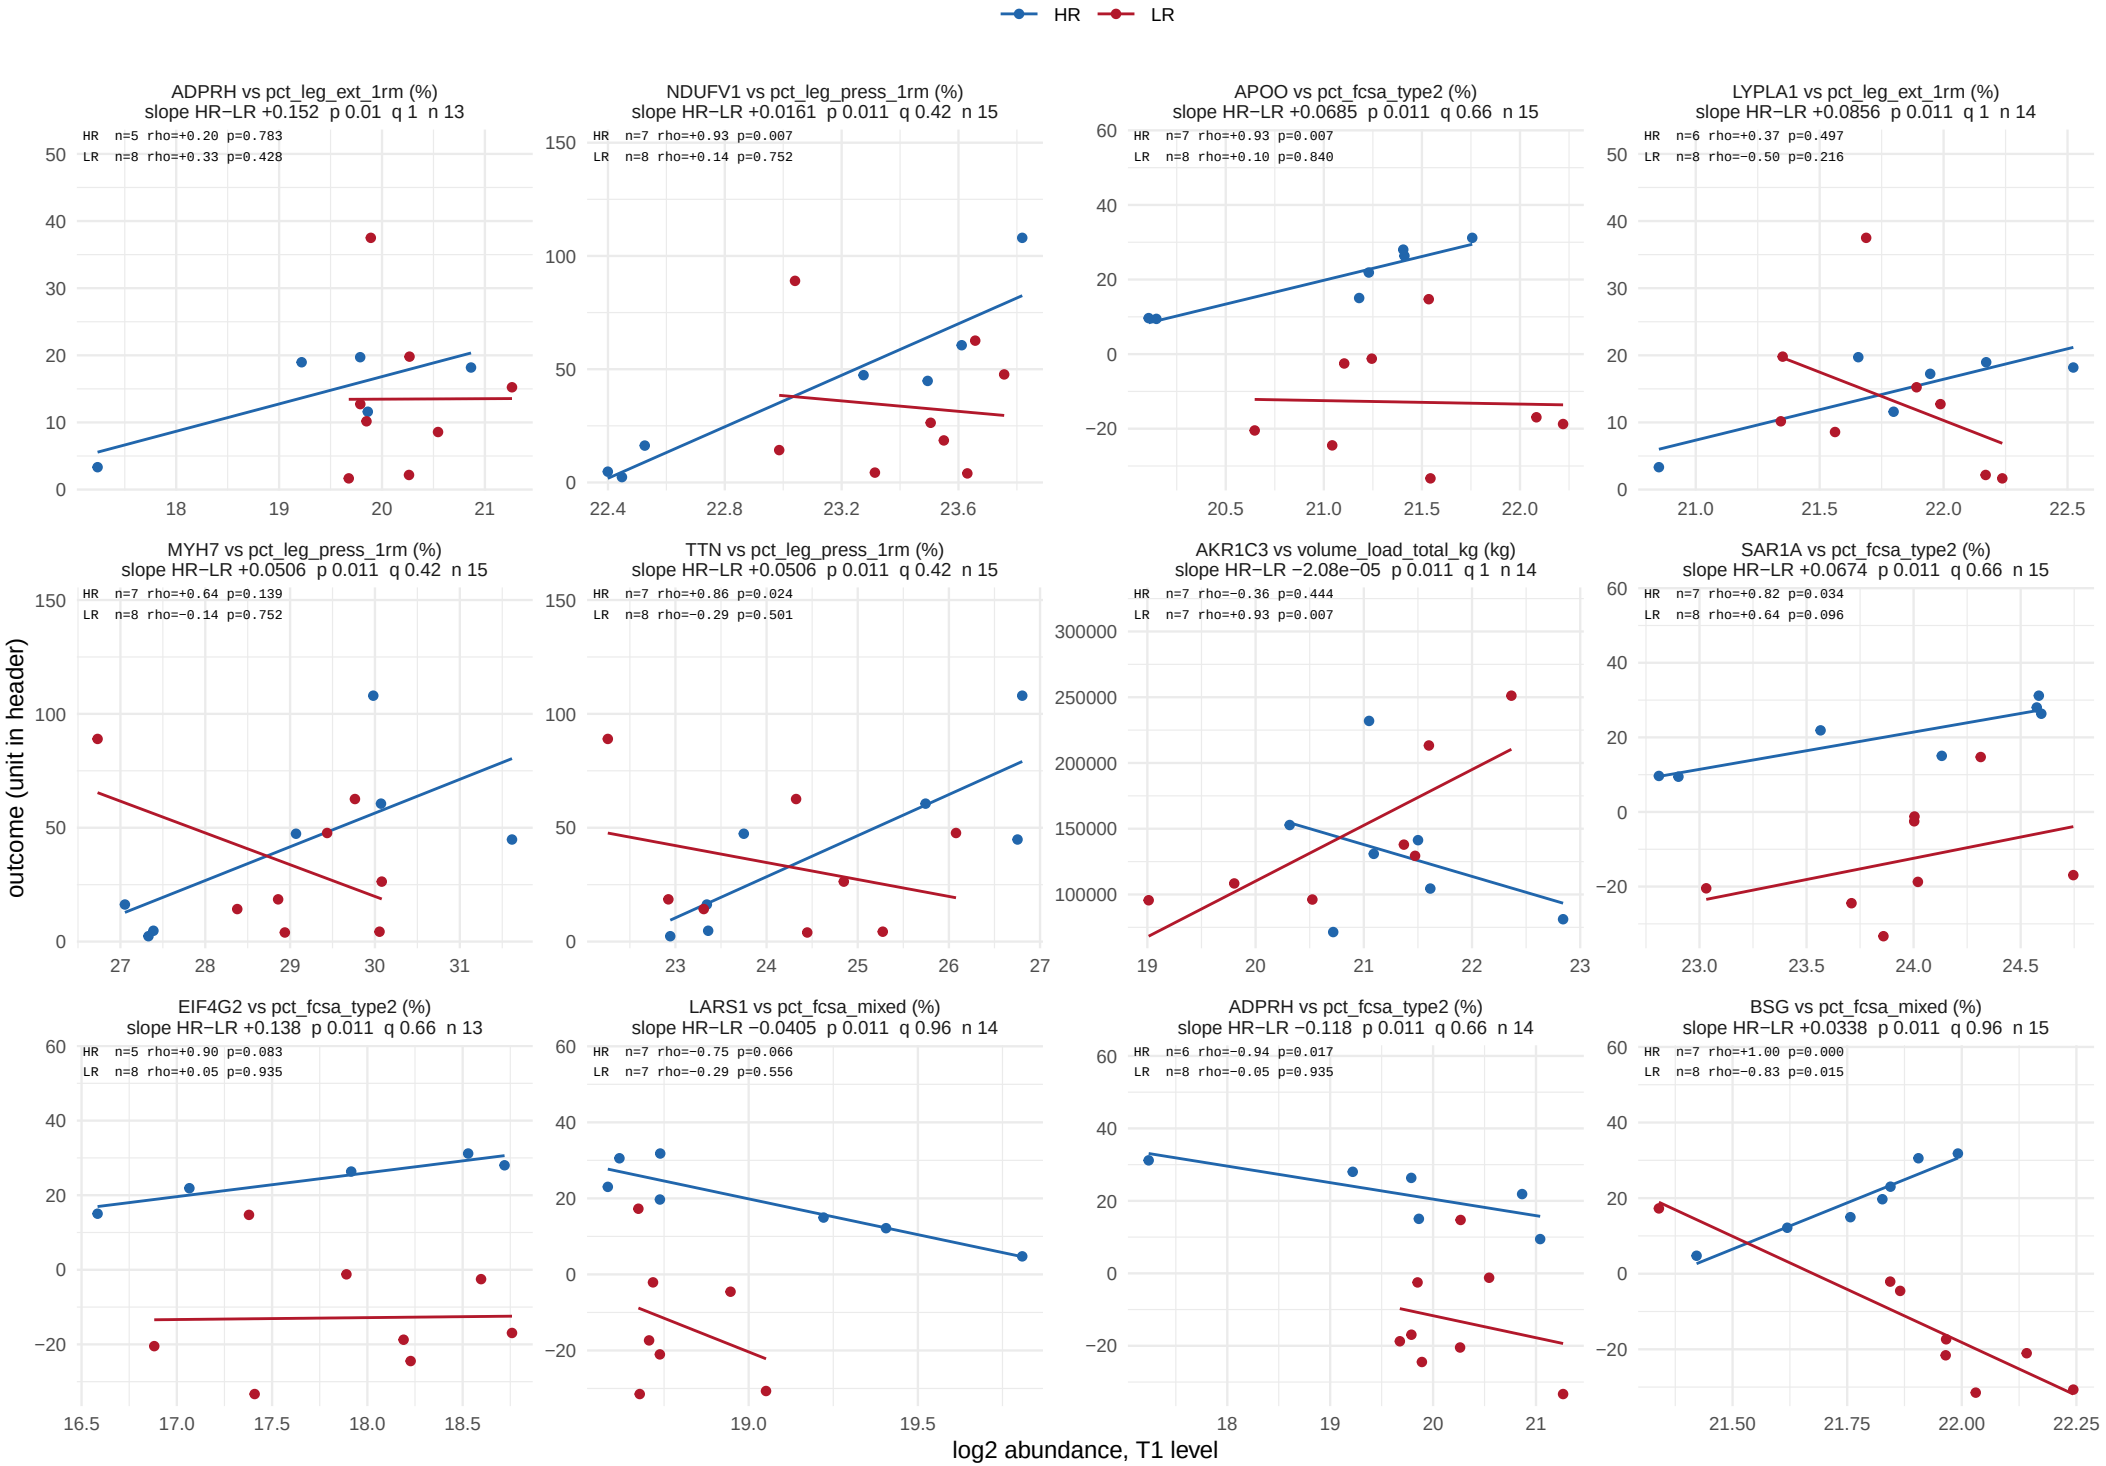

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


451 of 10266 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 10 of 38.

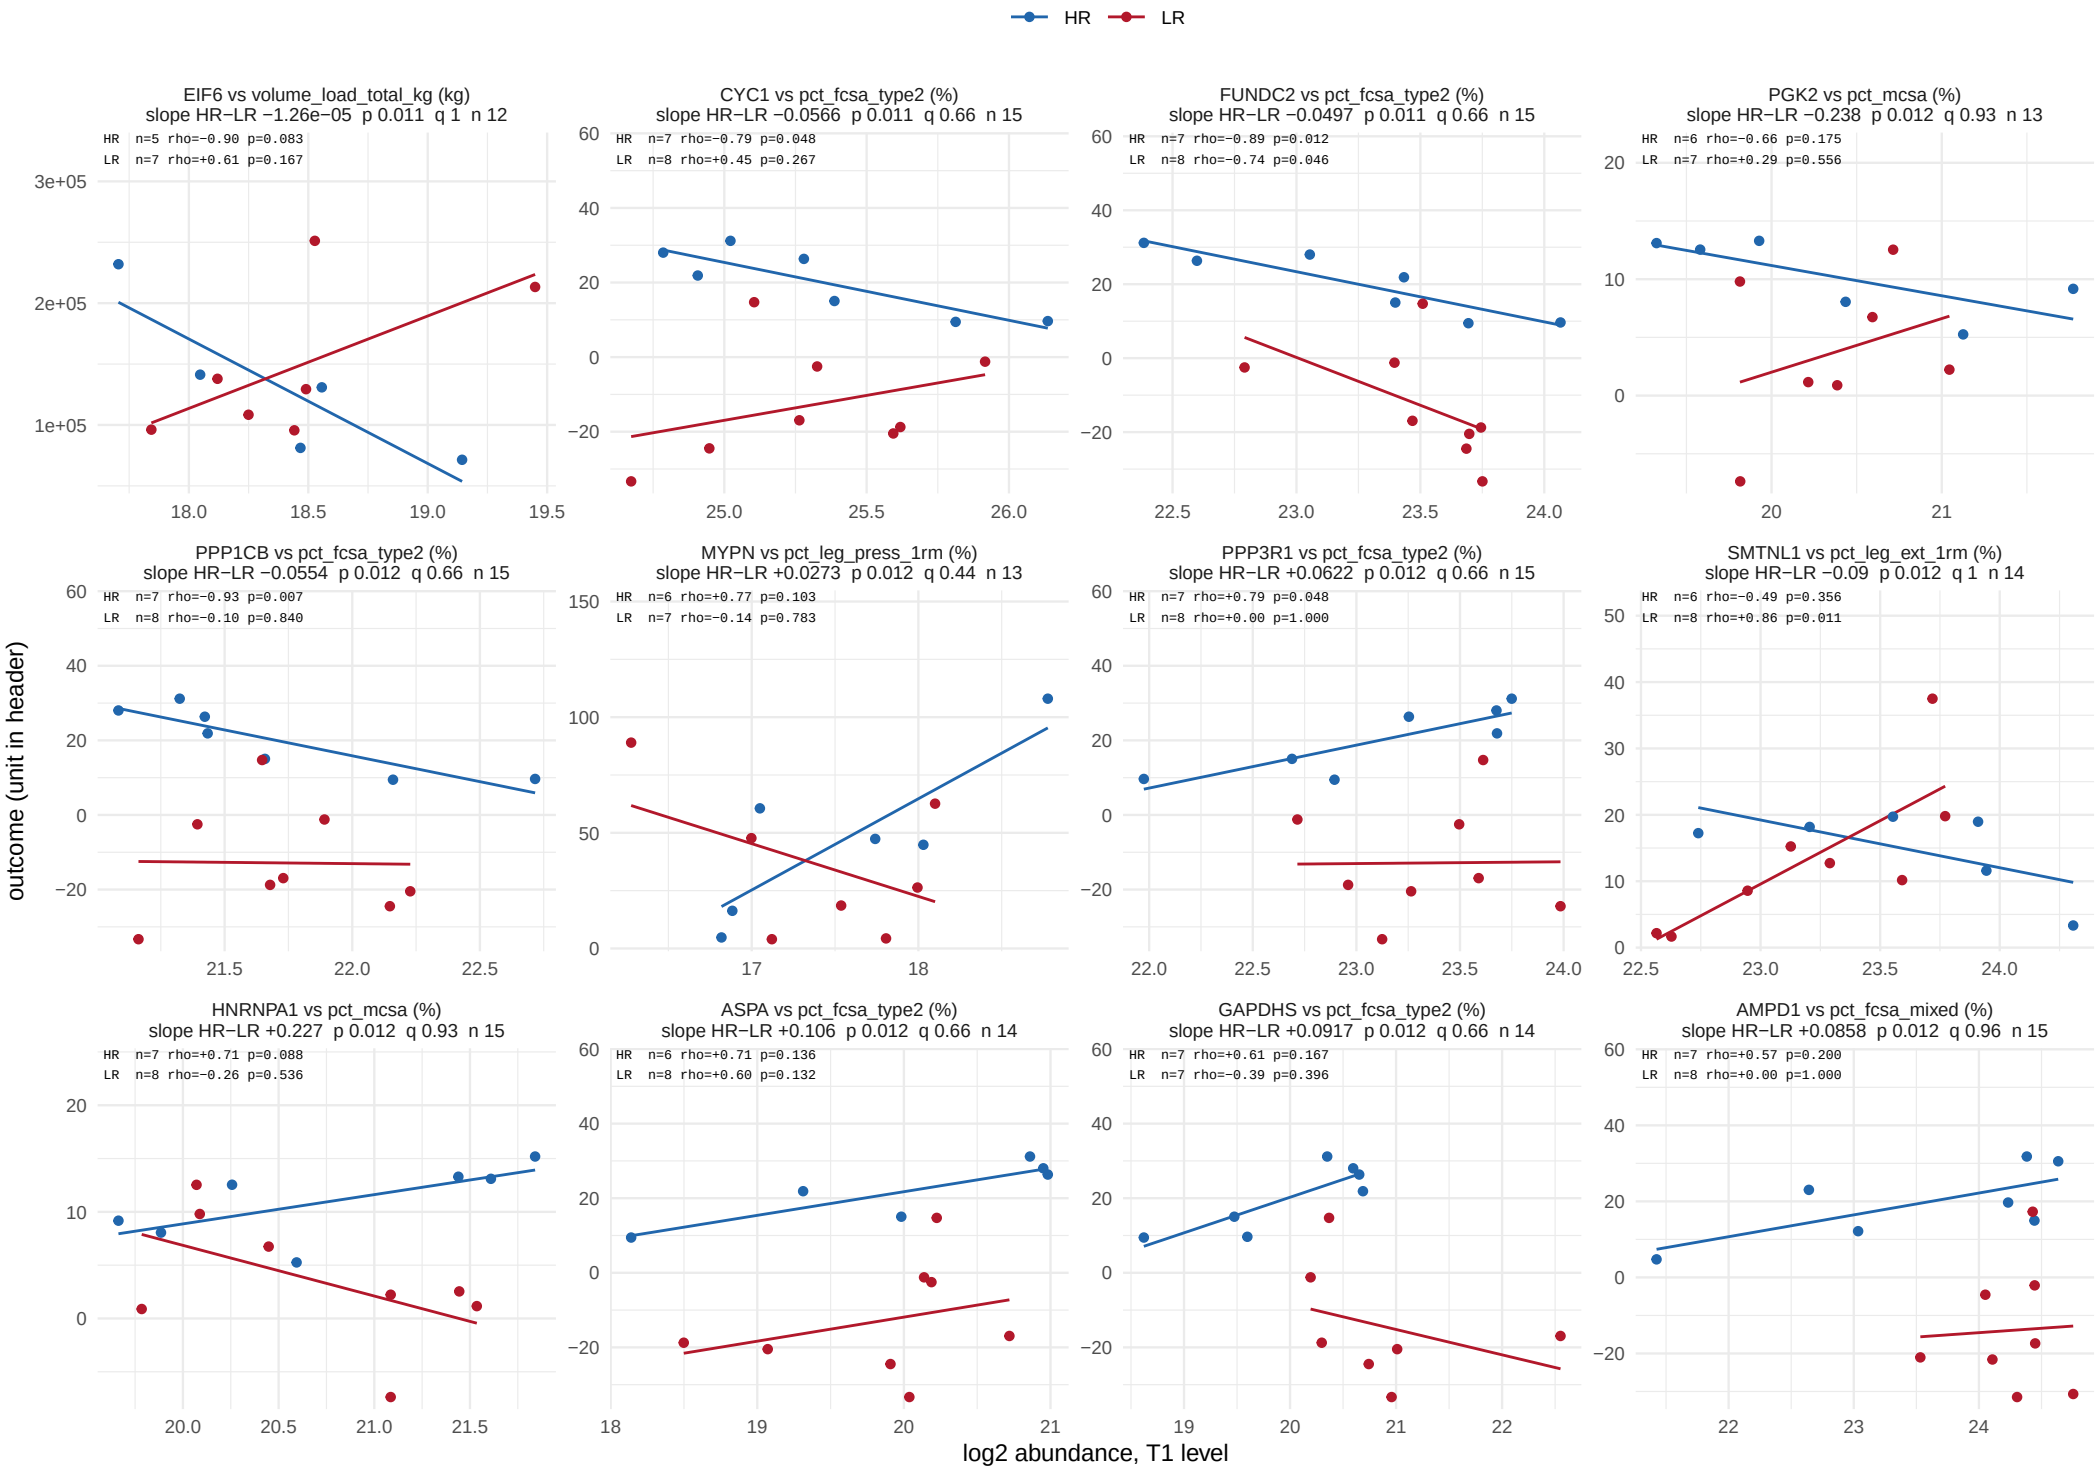

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


451 of 10266 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 11 of 38.

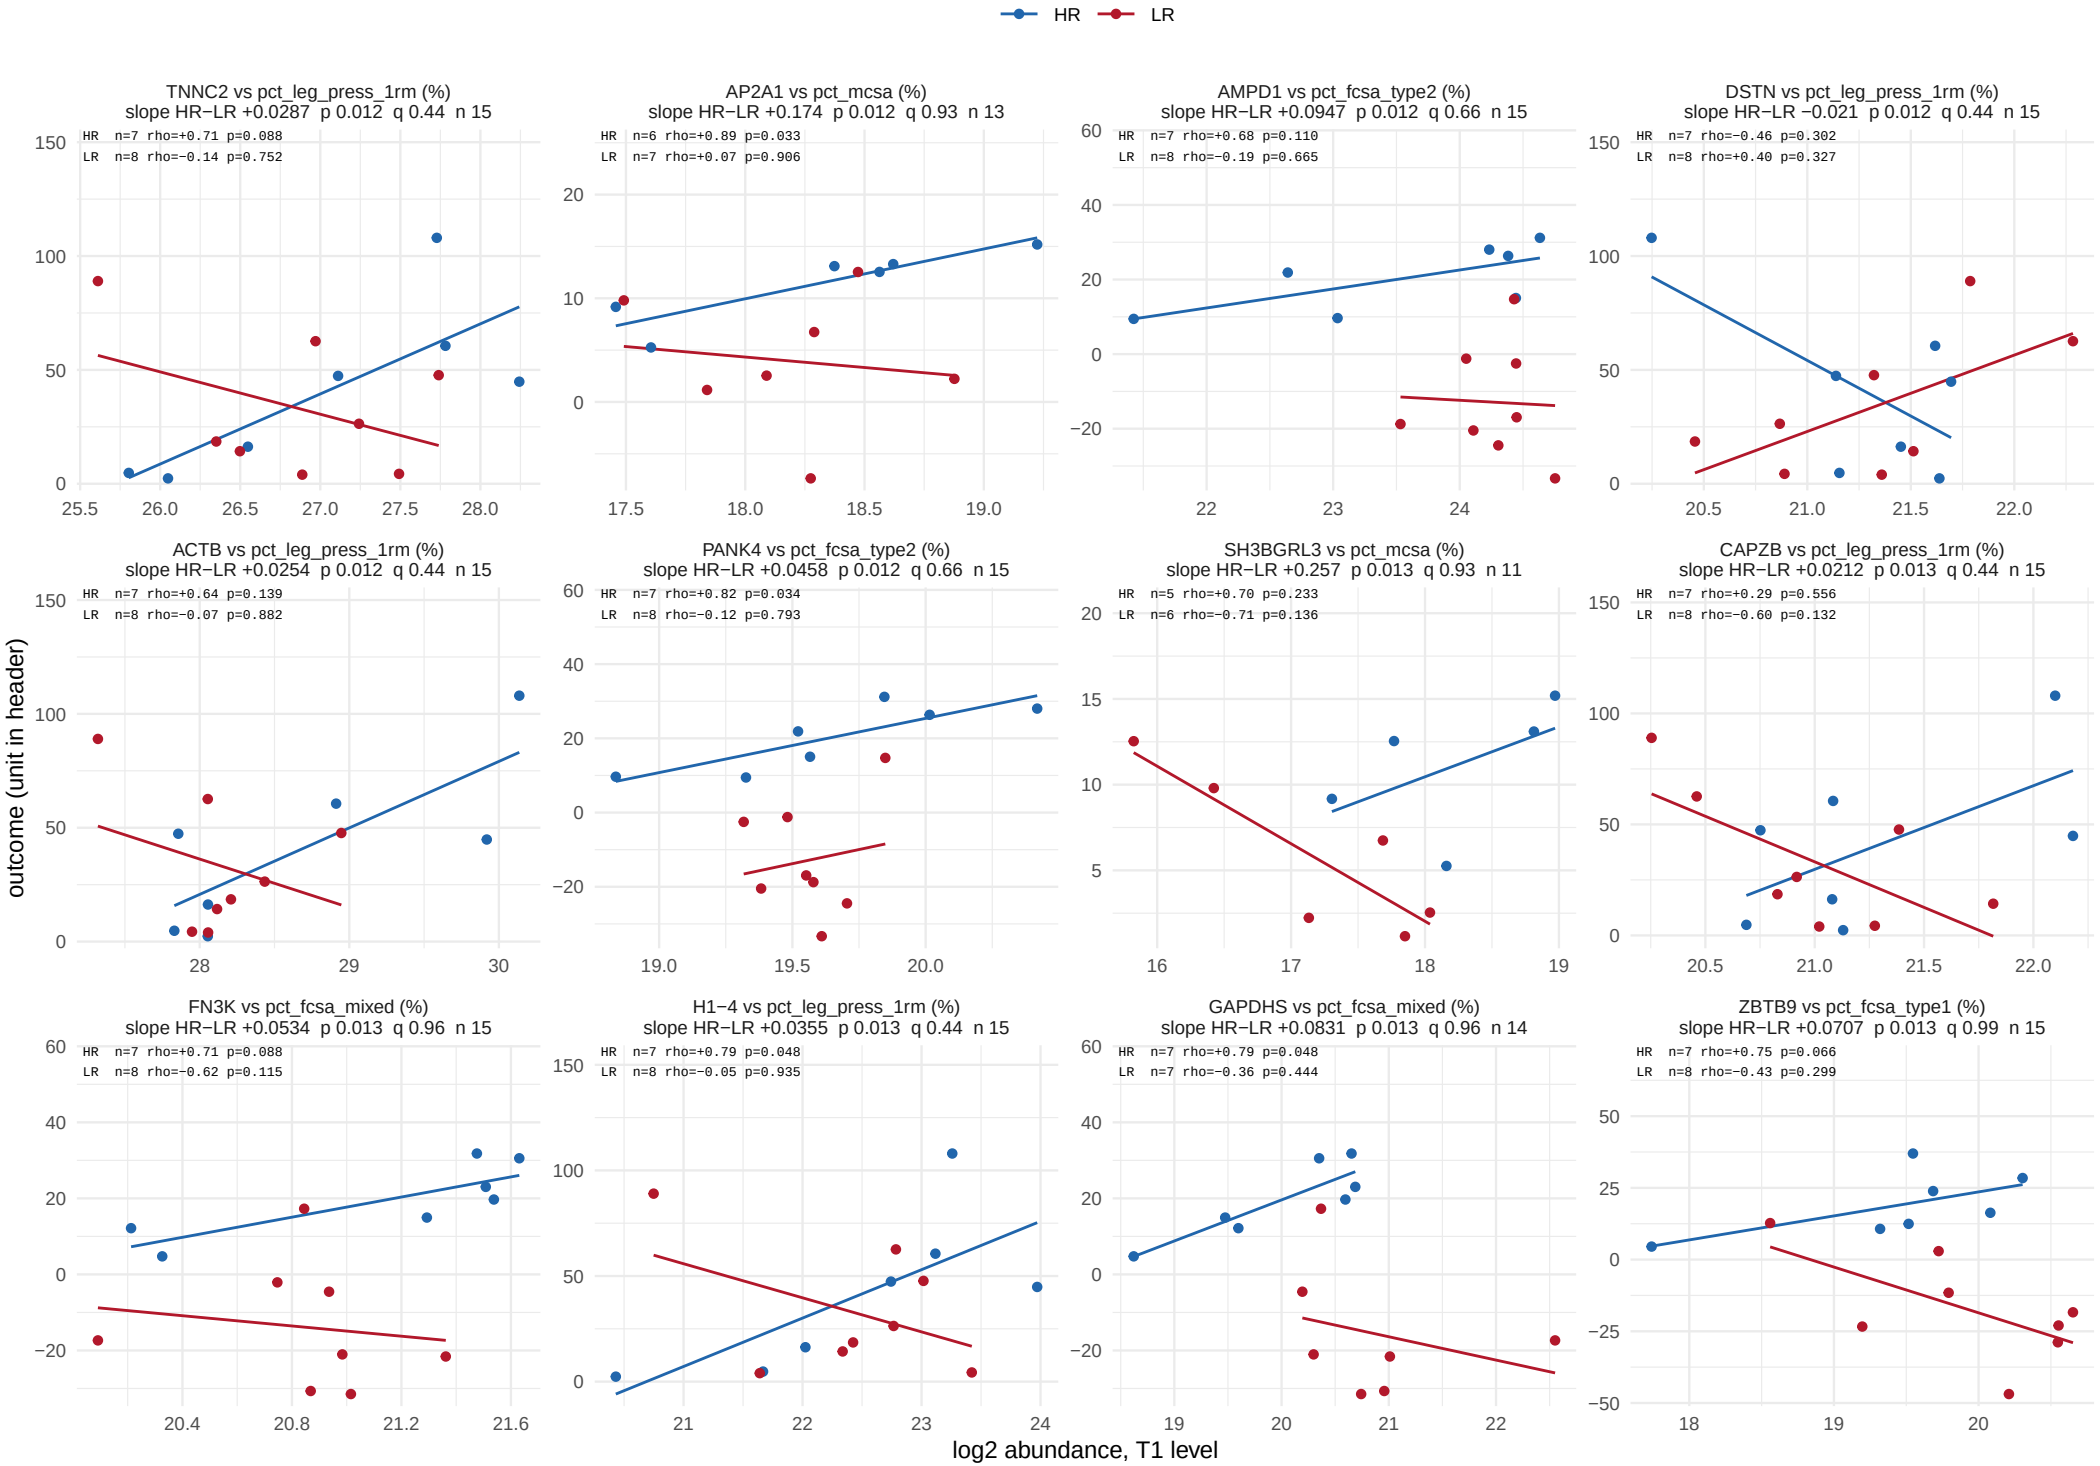

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


451 of 10266 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 12 of 38.

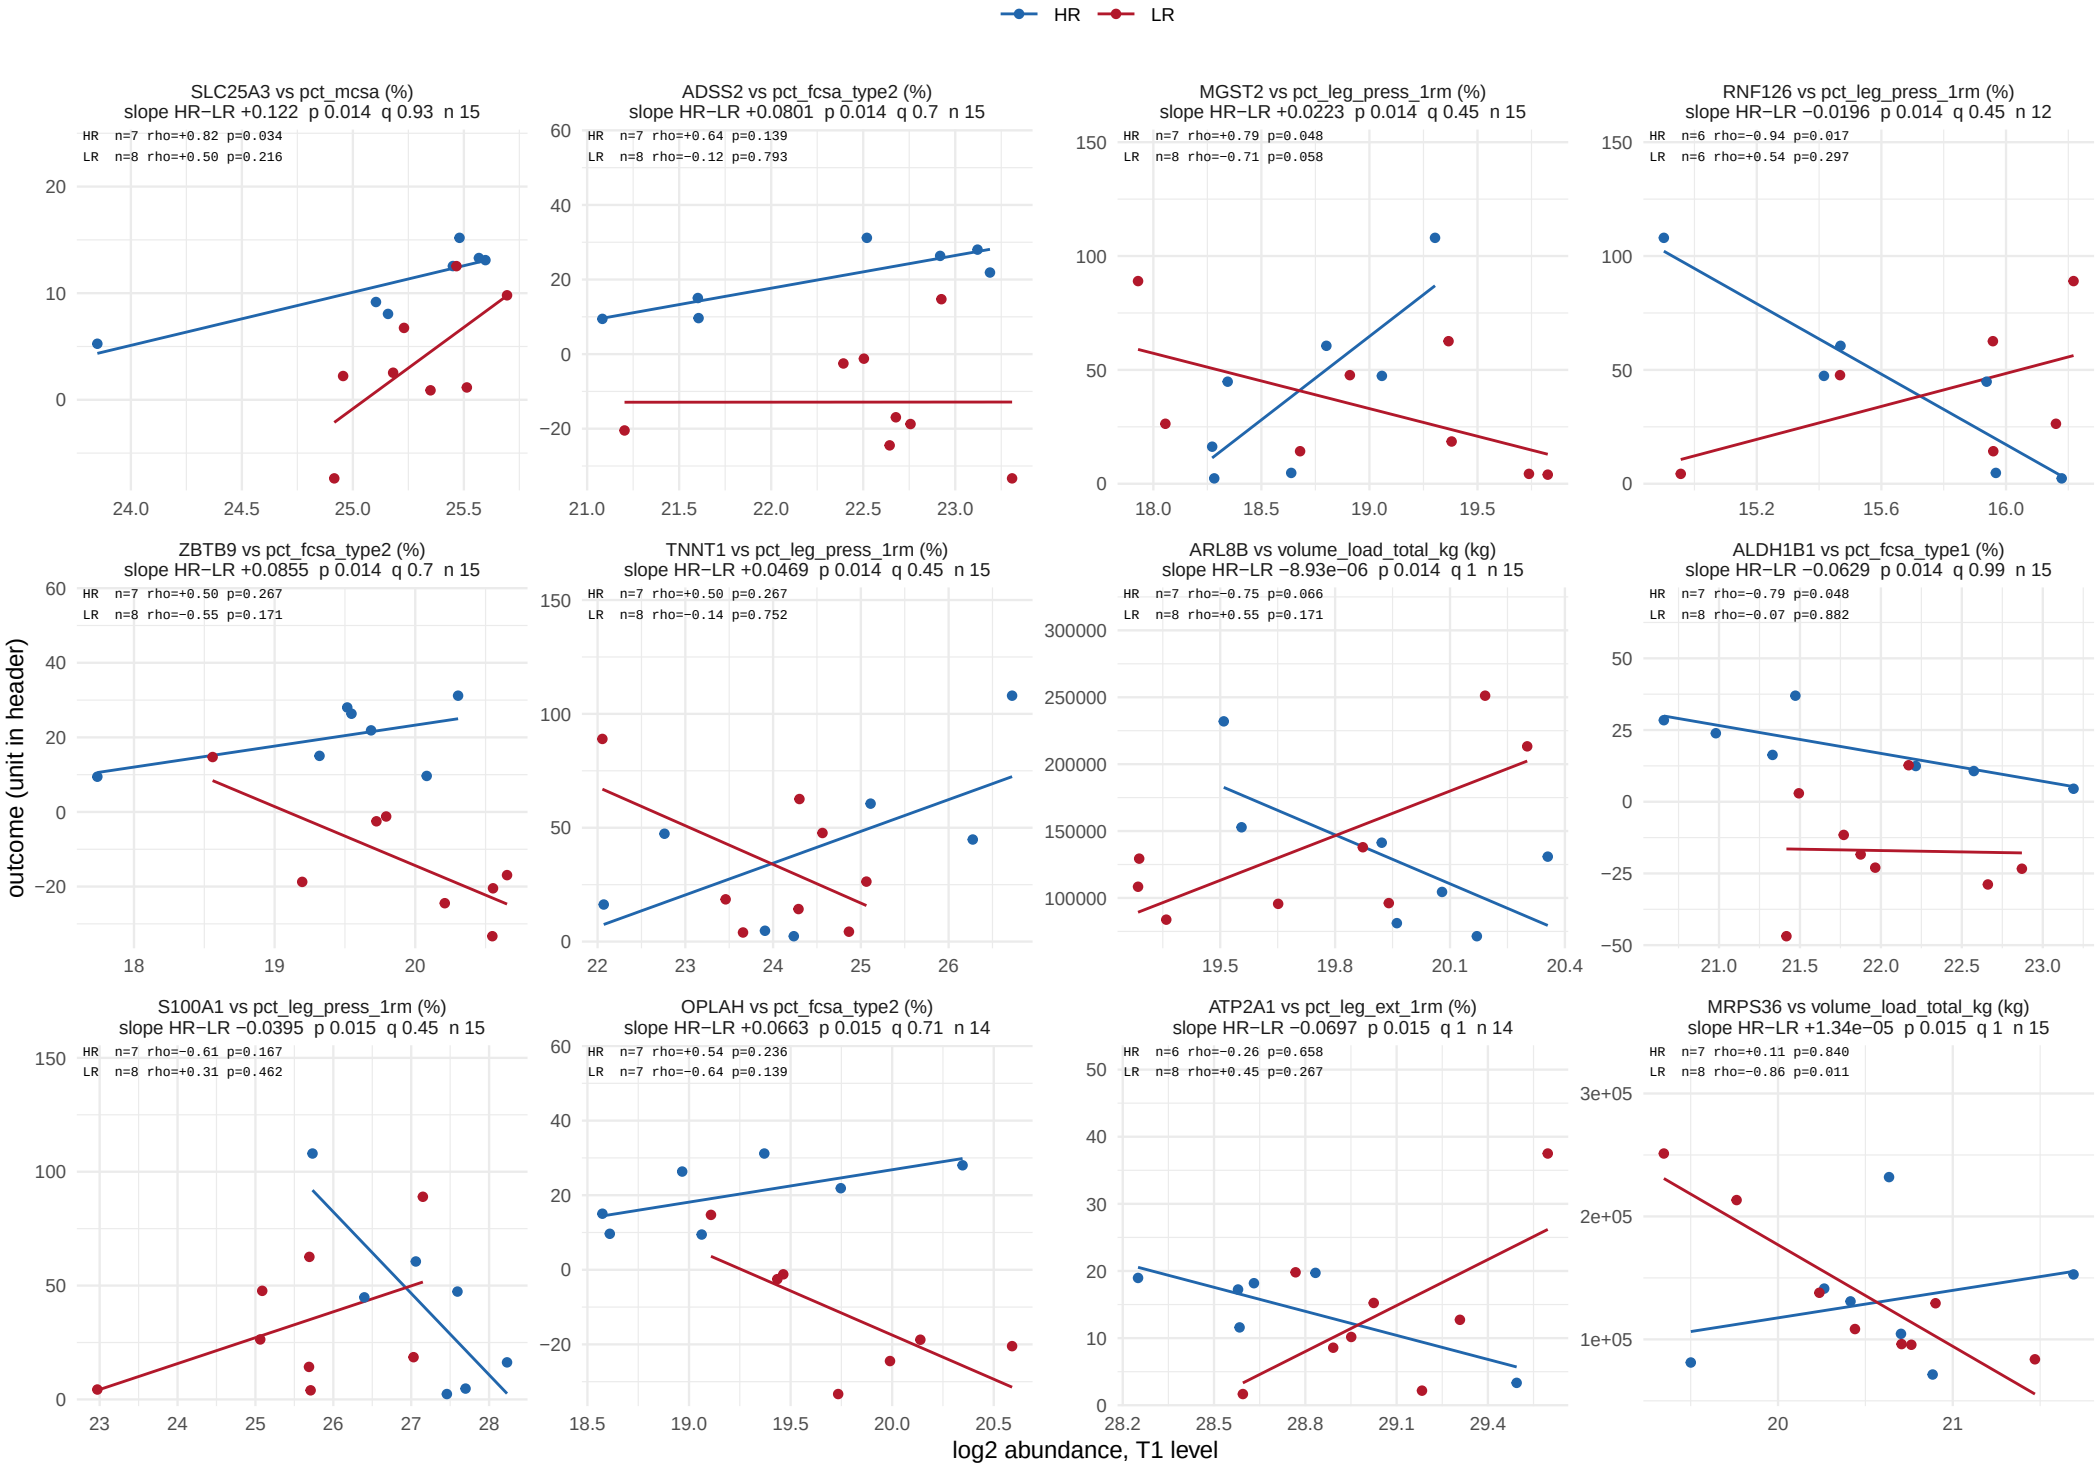

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


451 of 10266 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 13 of 38.

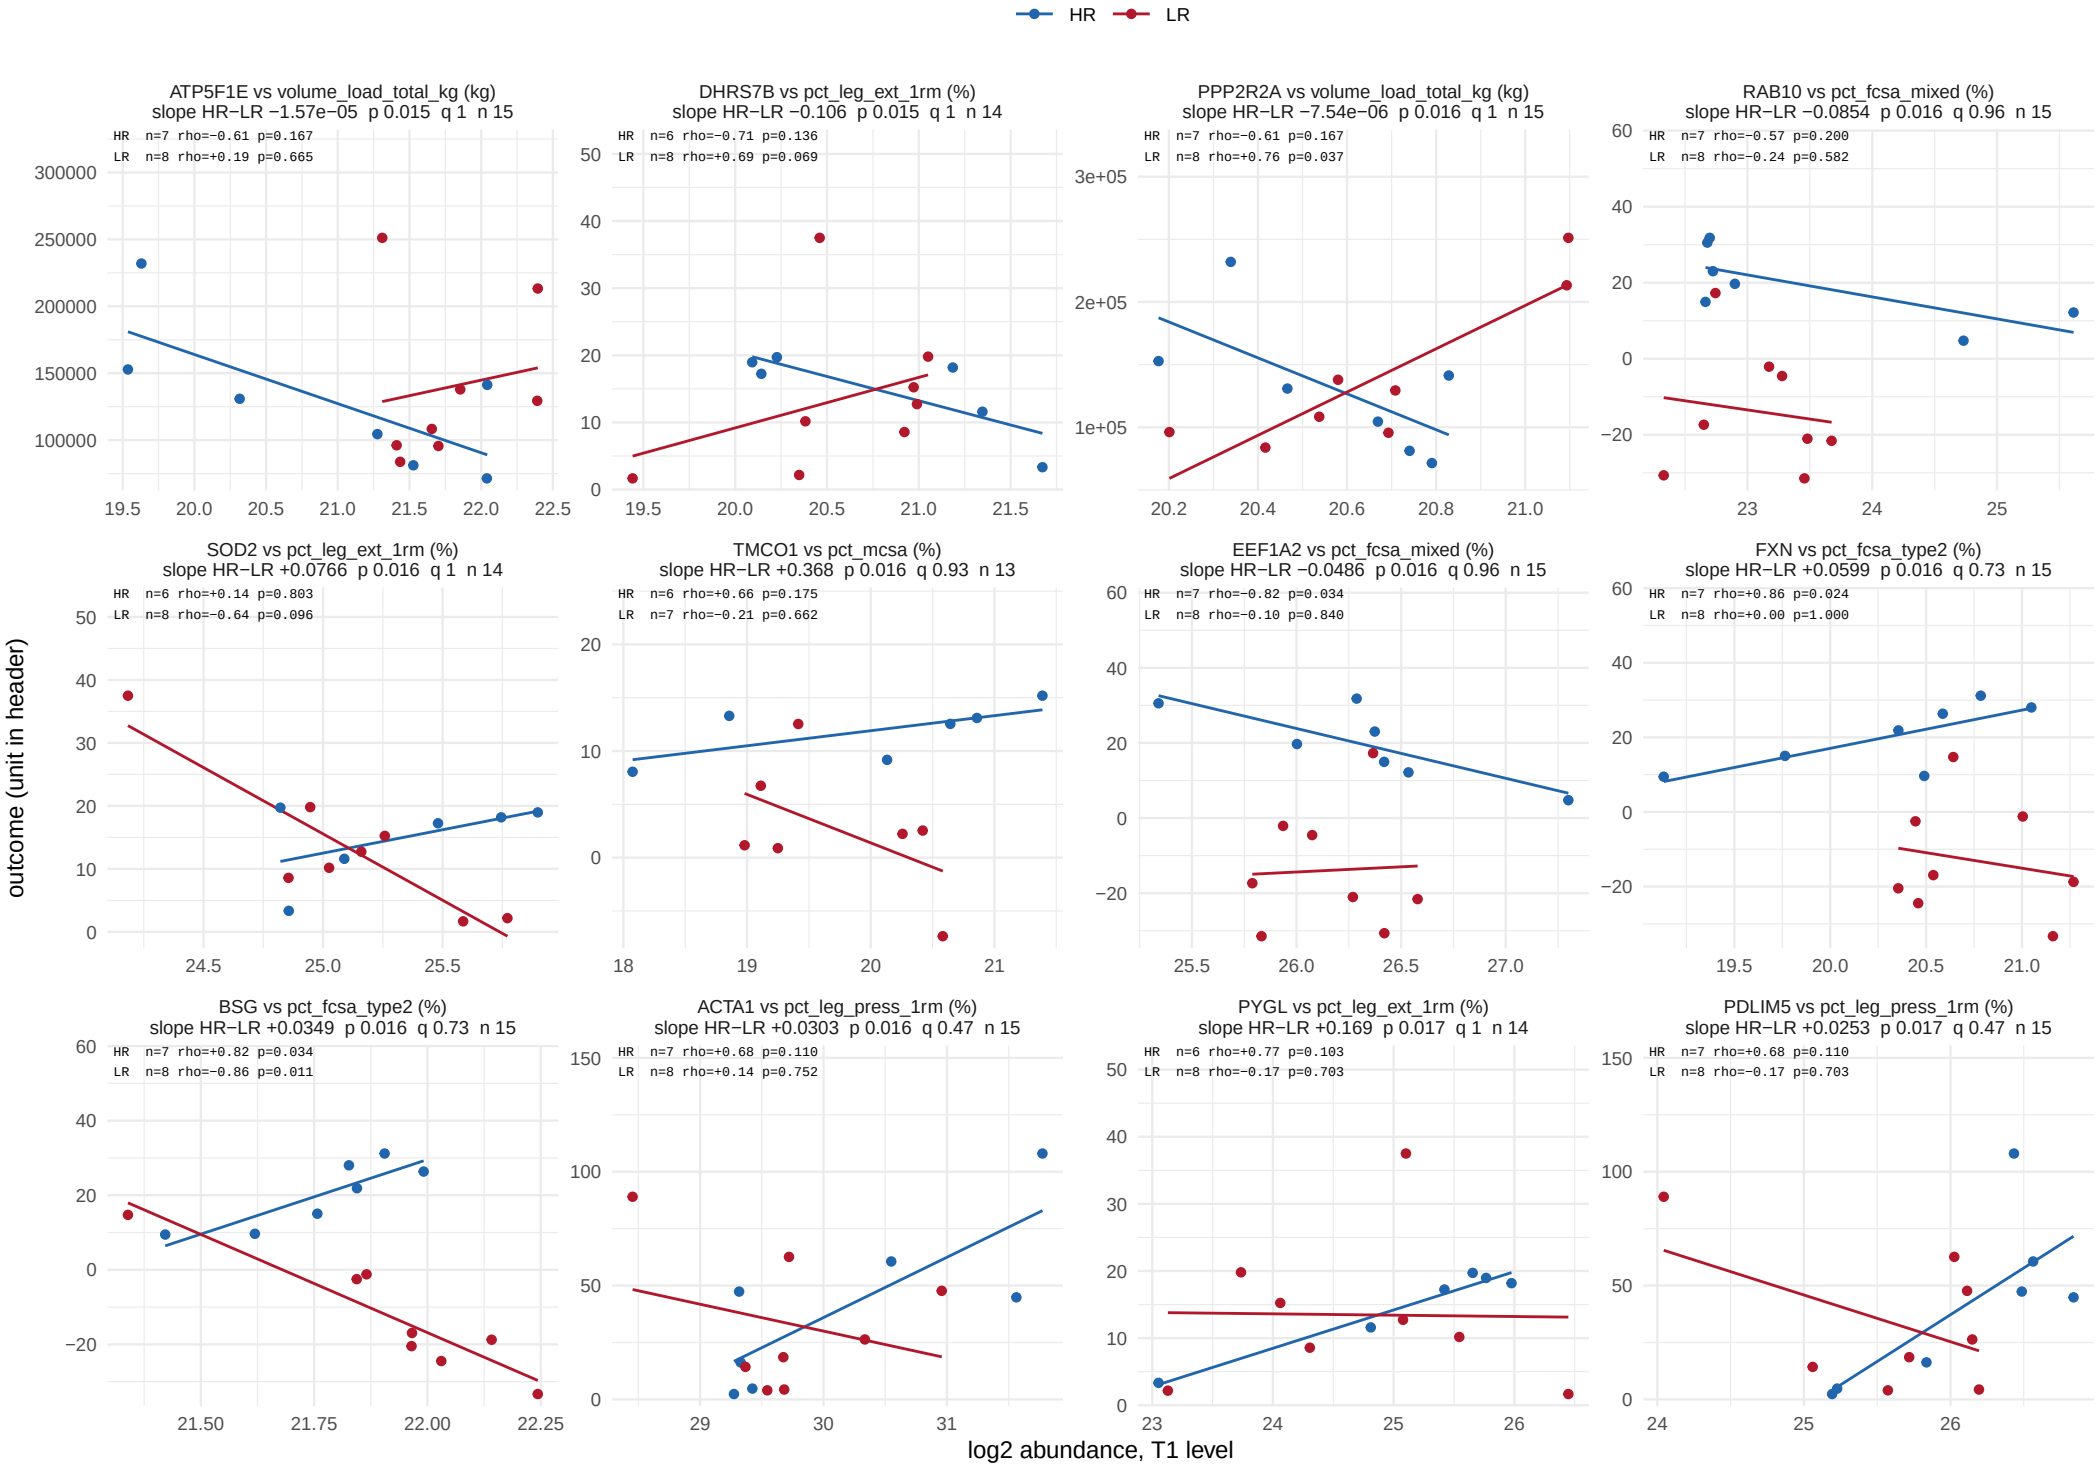

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


451 of 10266 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 14 of 38.

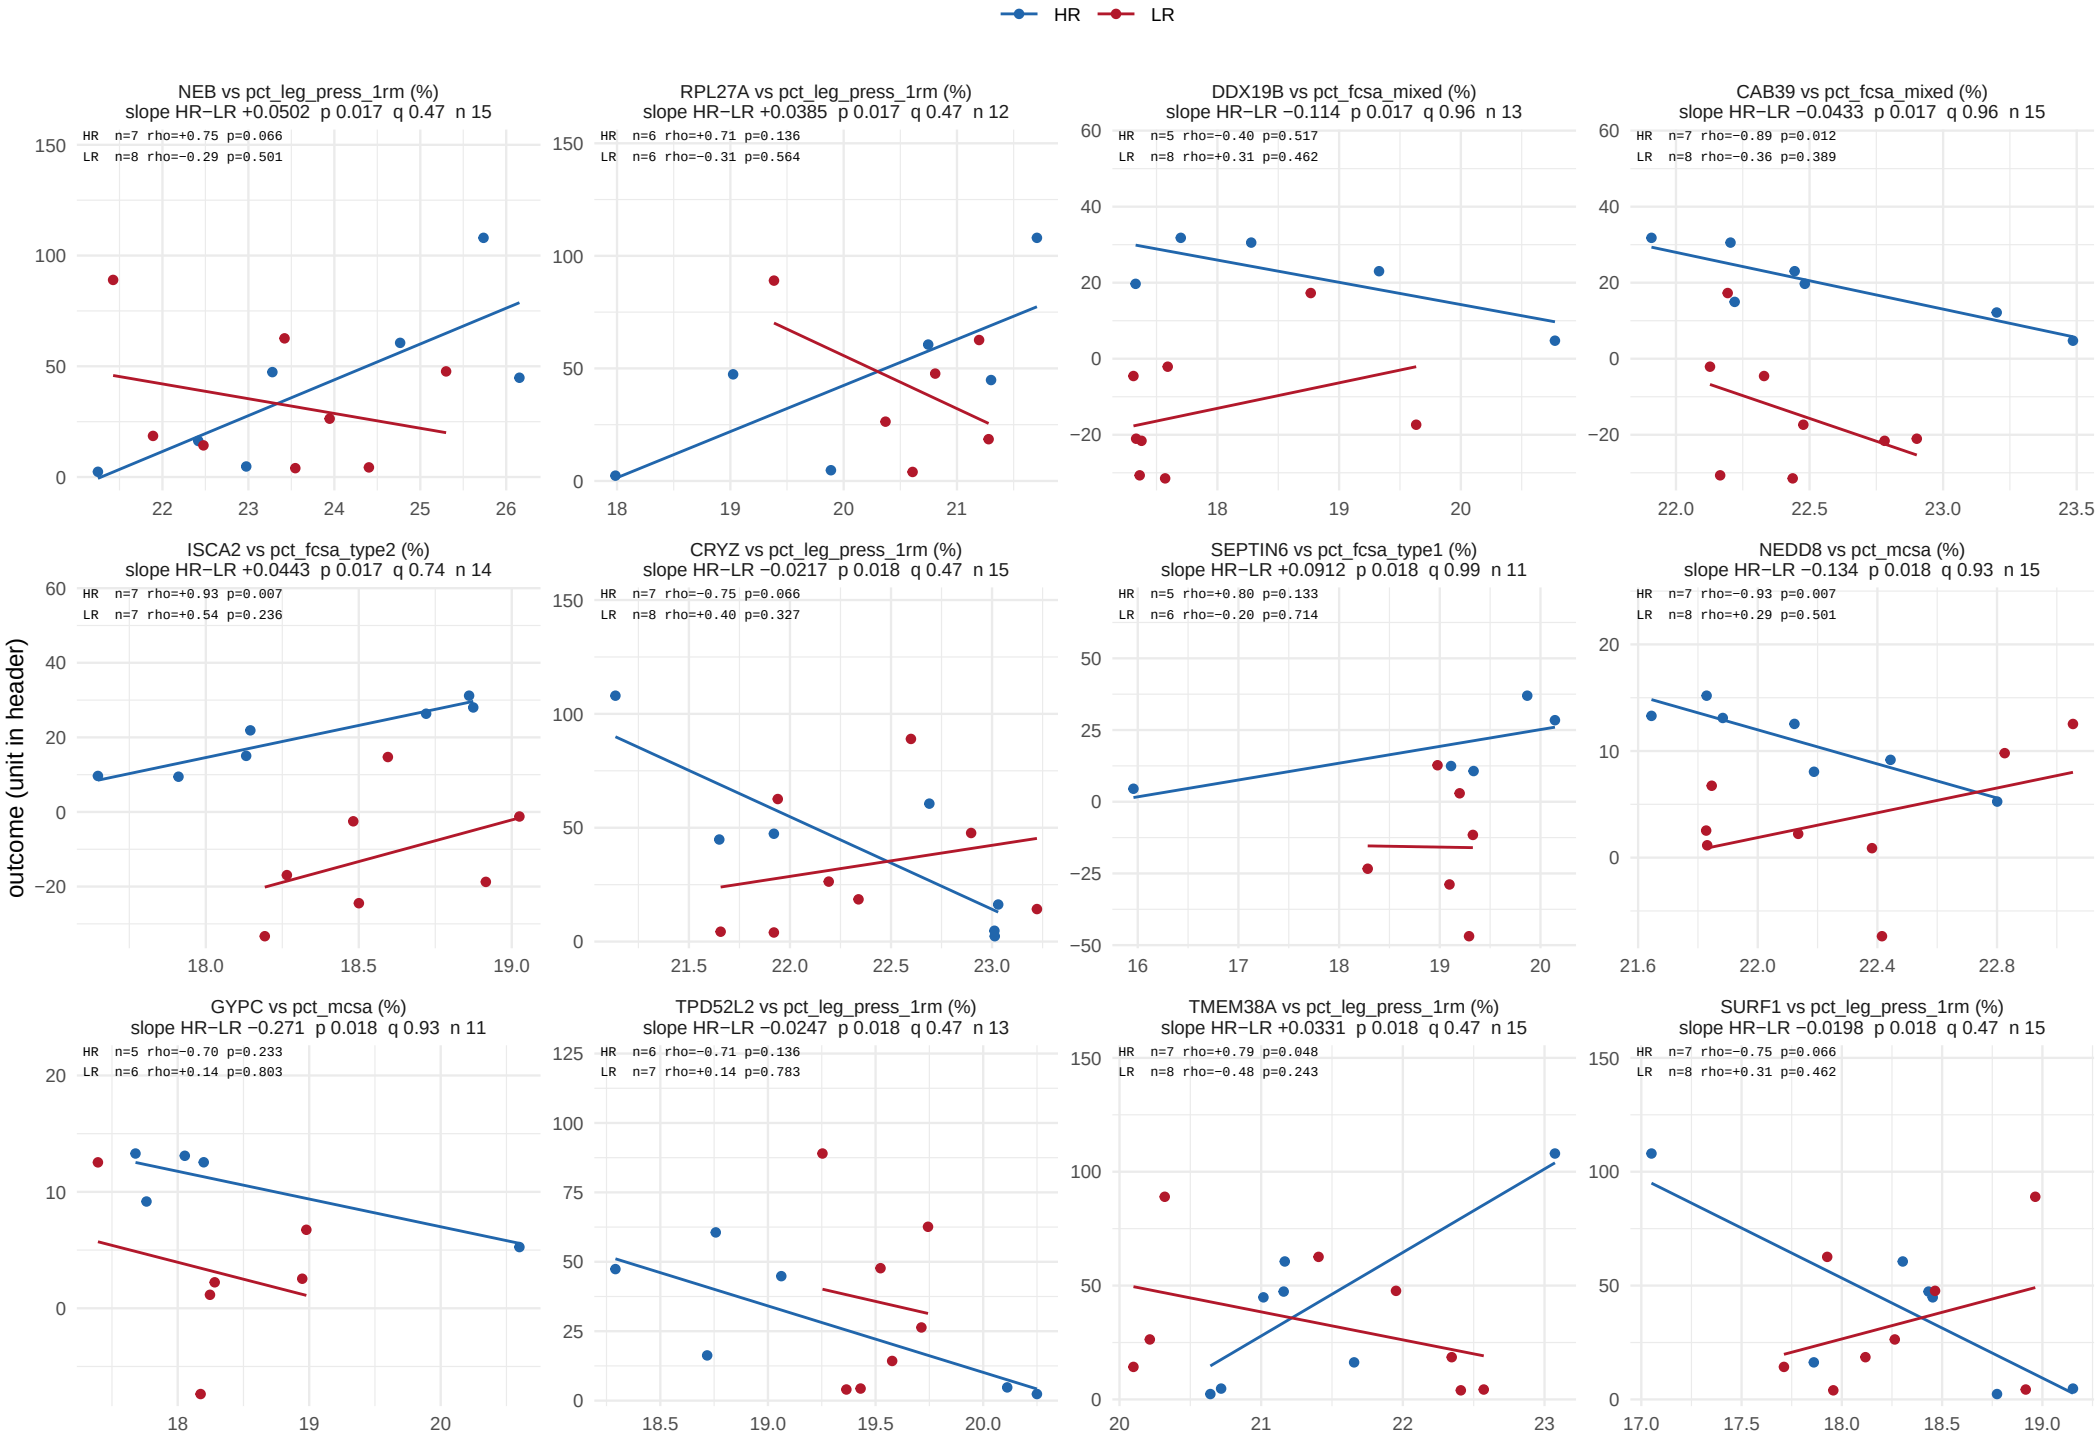

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


451 of 10266 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 15 of 38.

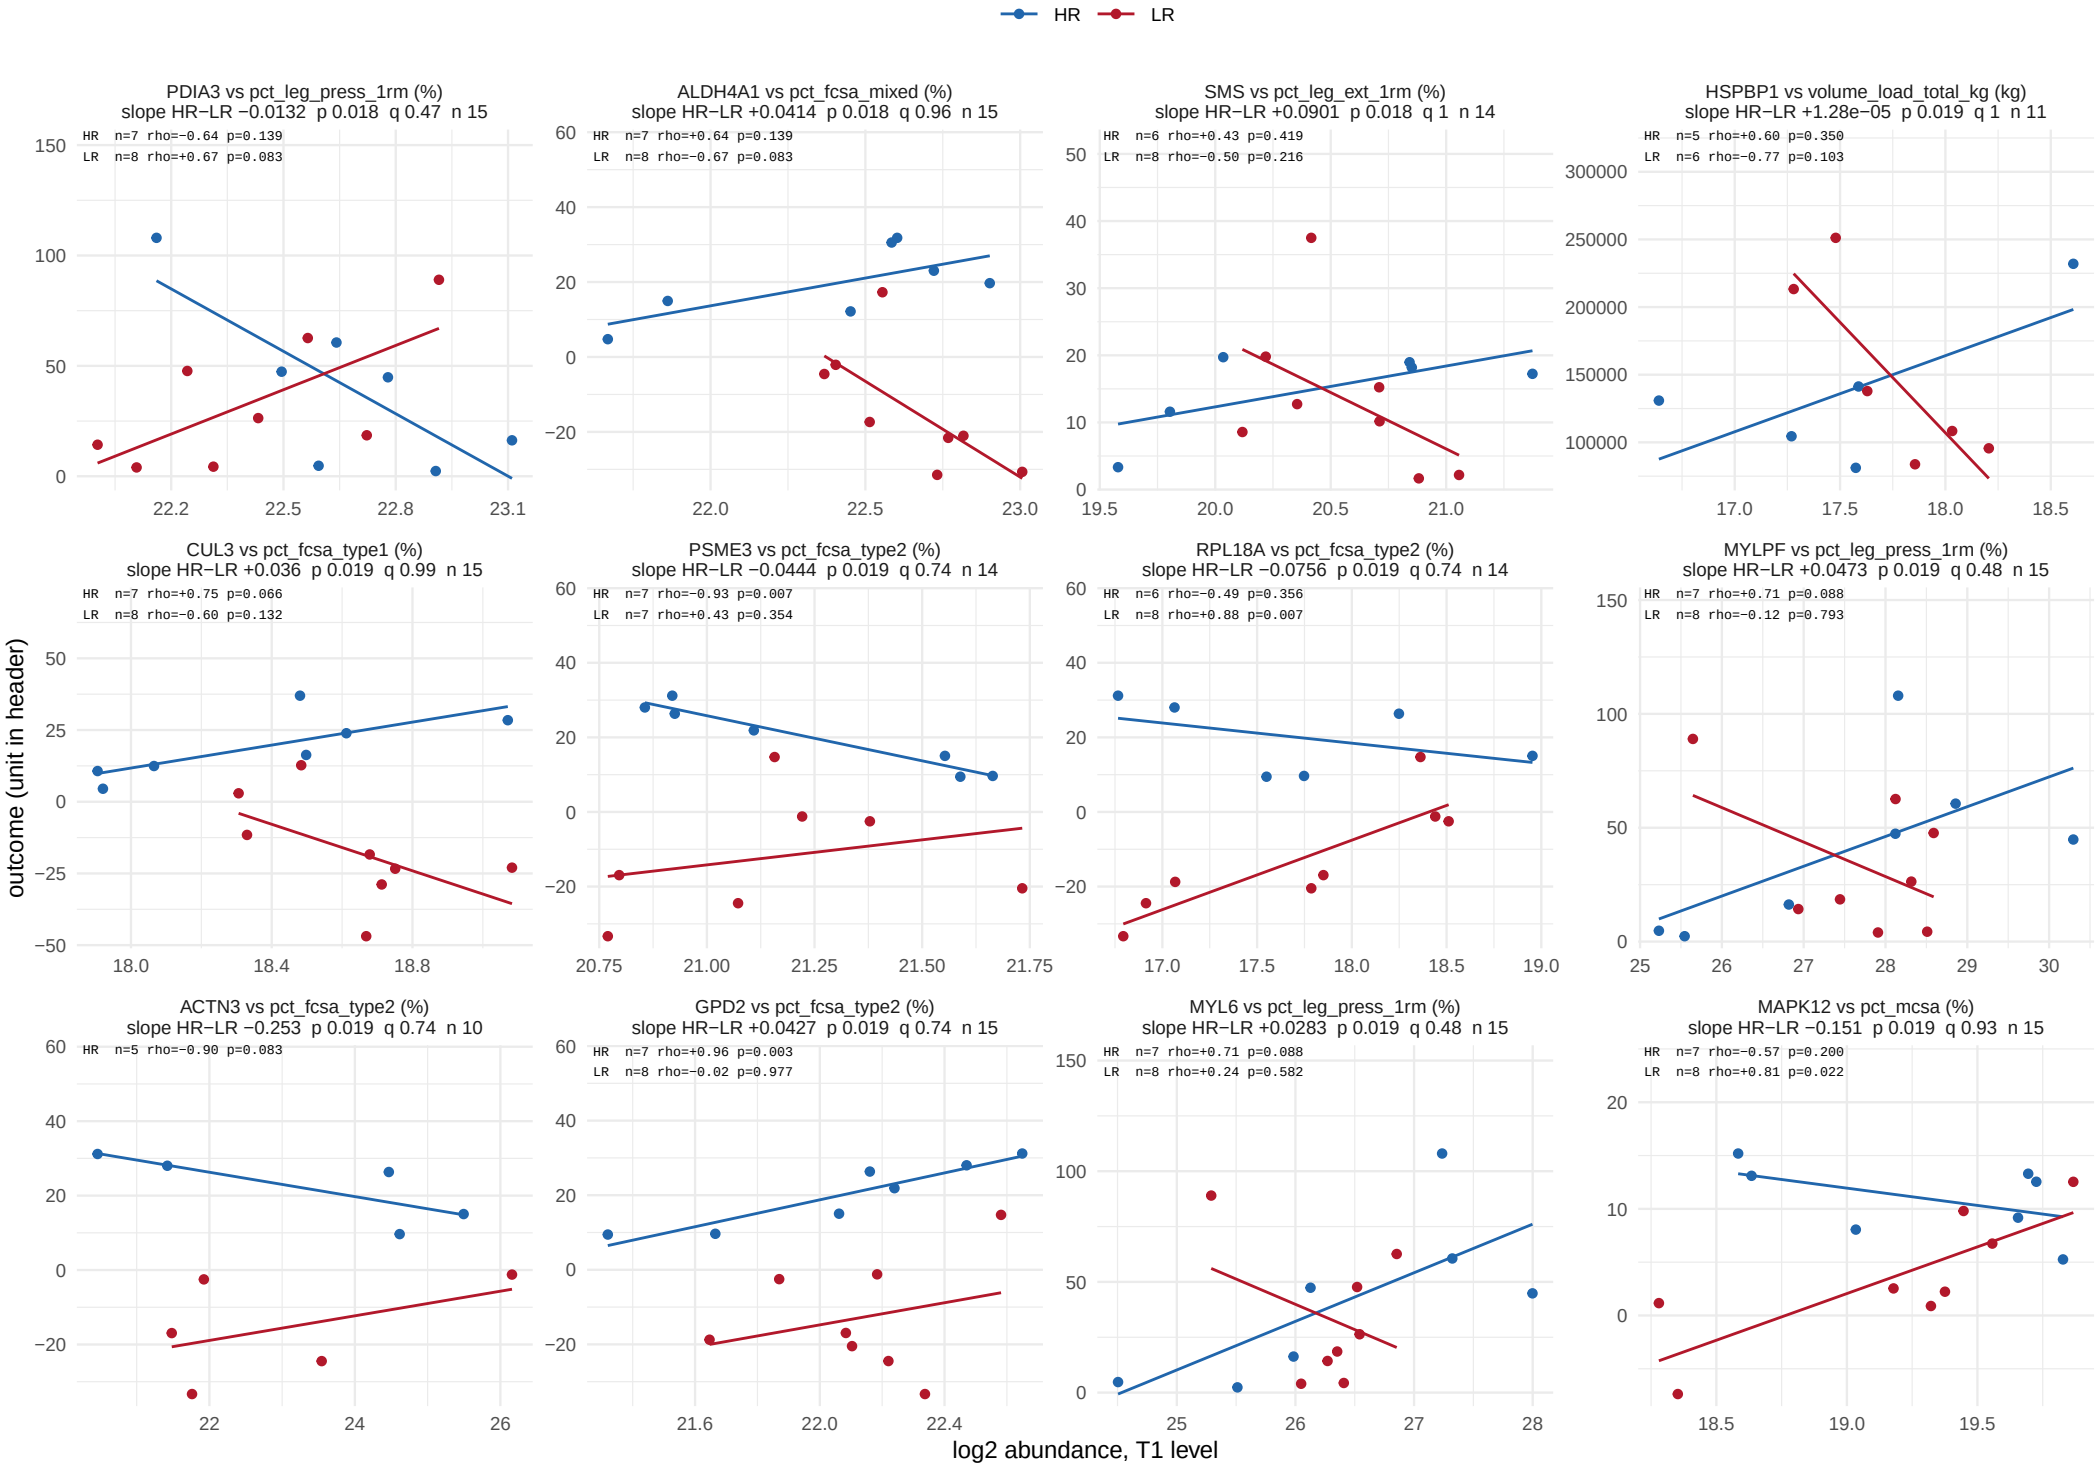

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


451 of 10266 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 16 of 38.

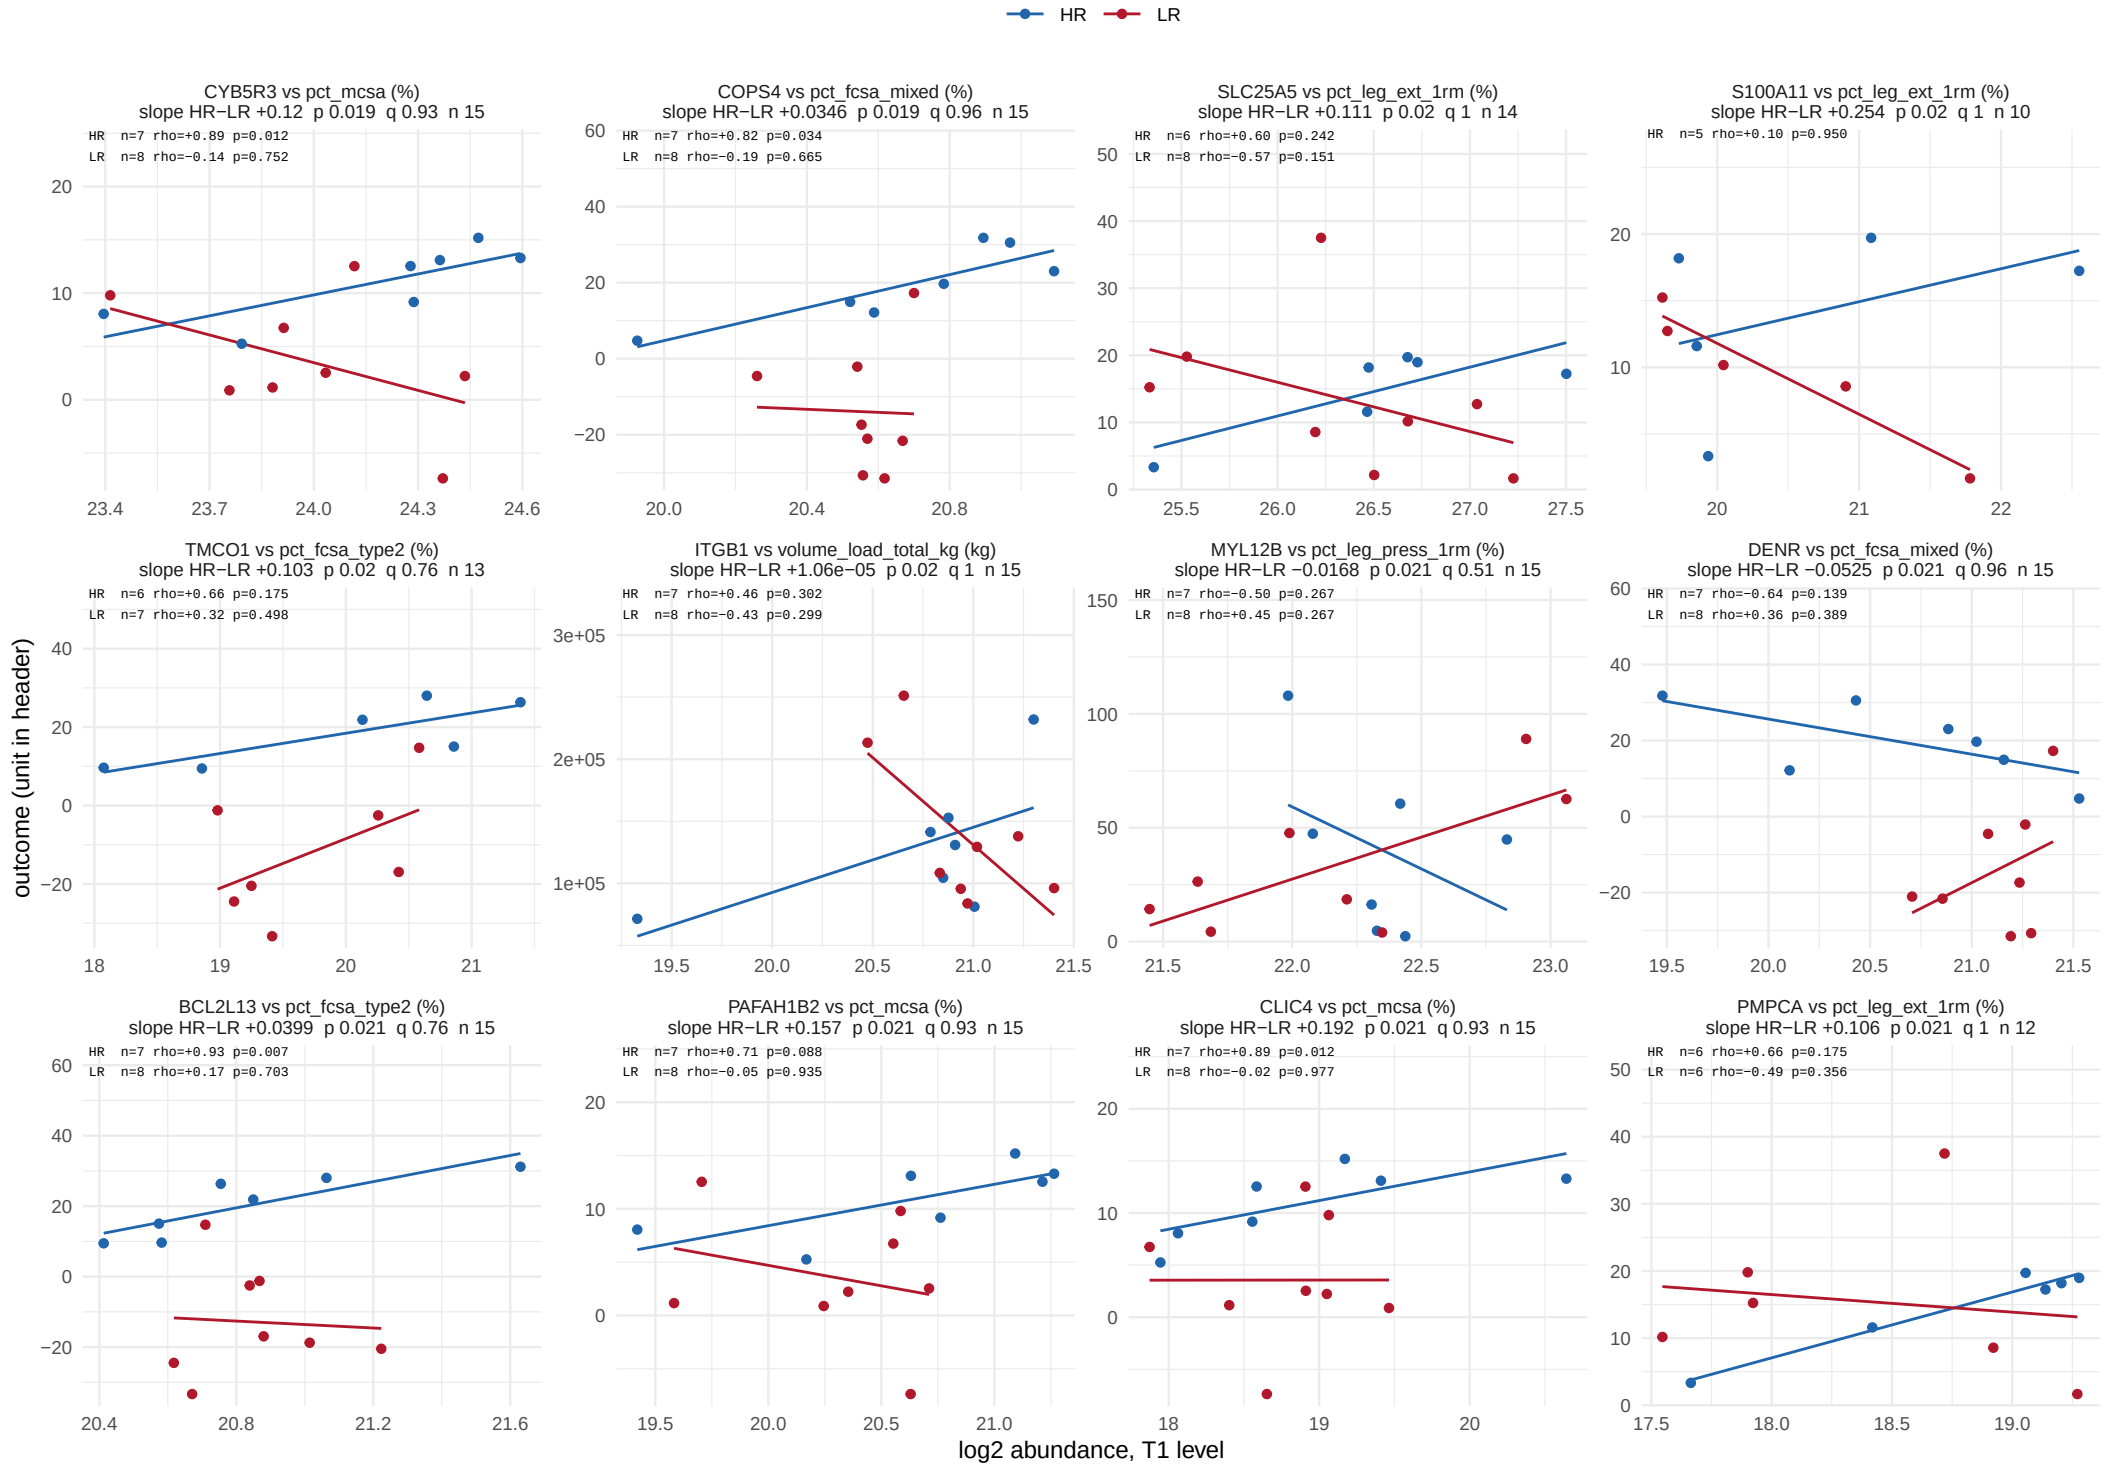

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


451 of 10266 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 17 of 38.

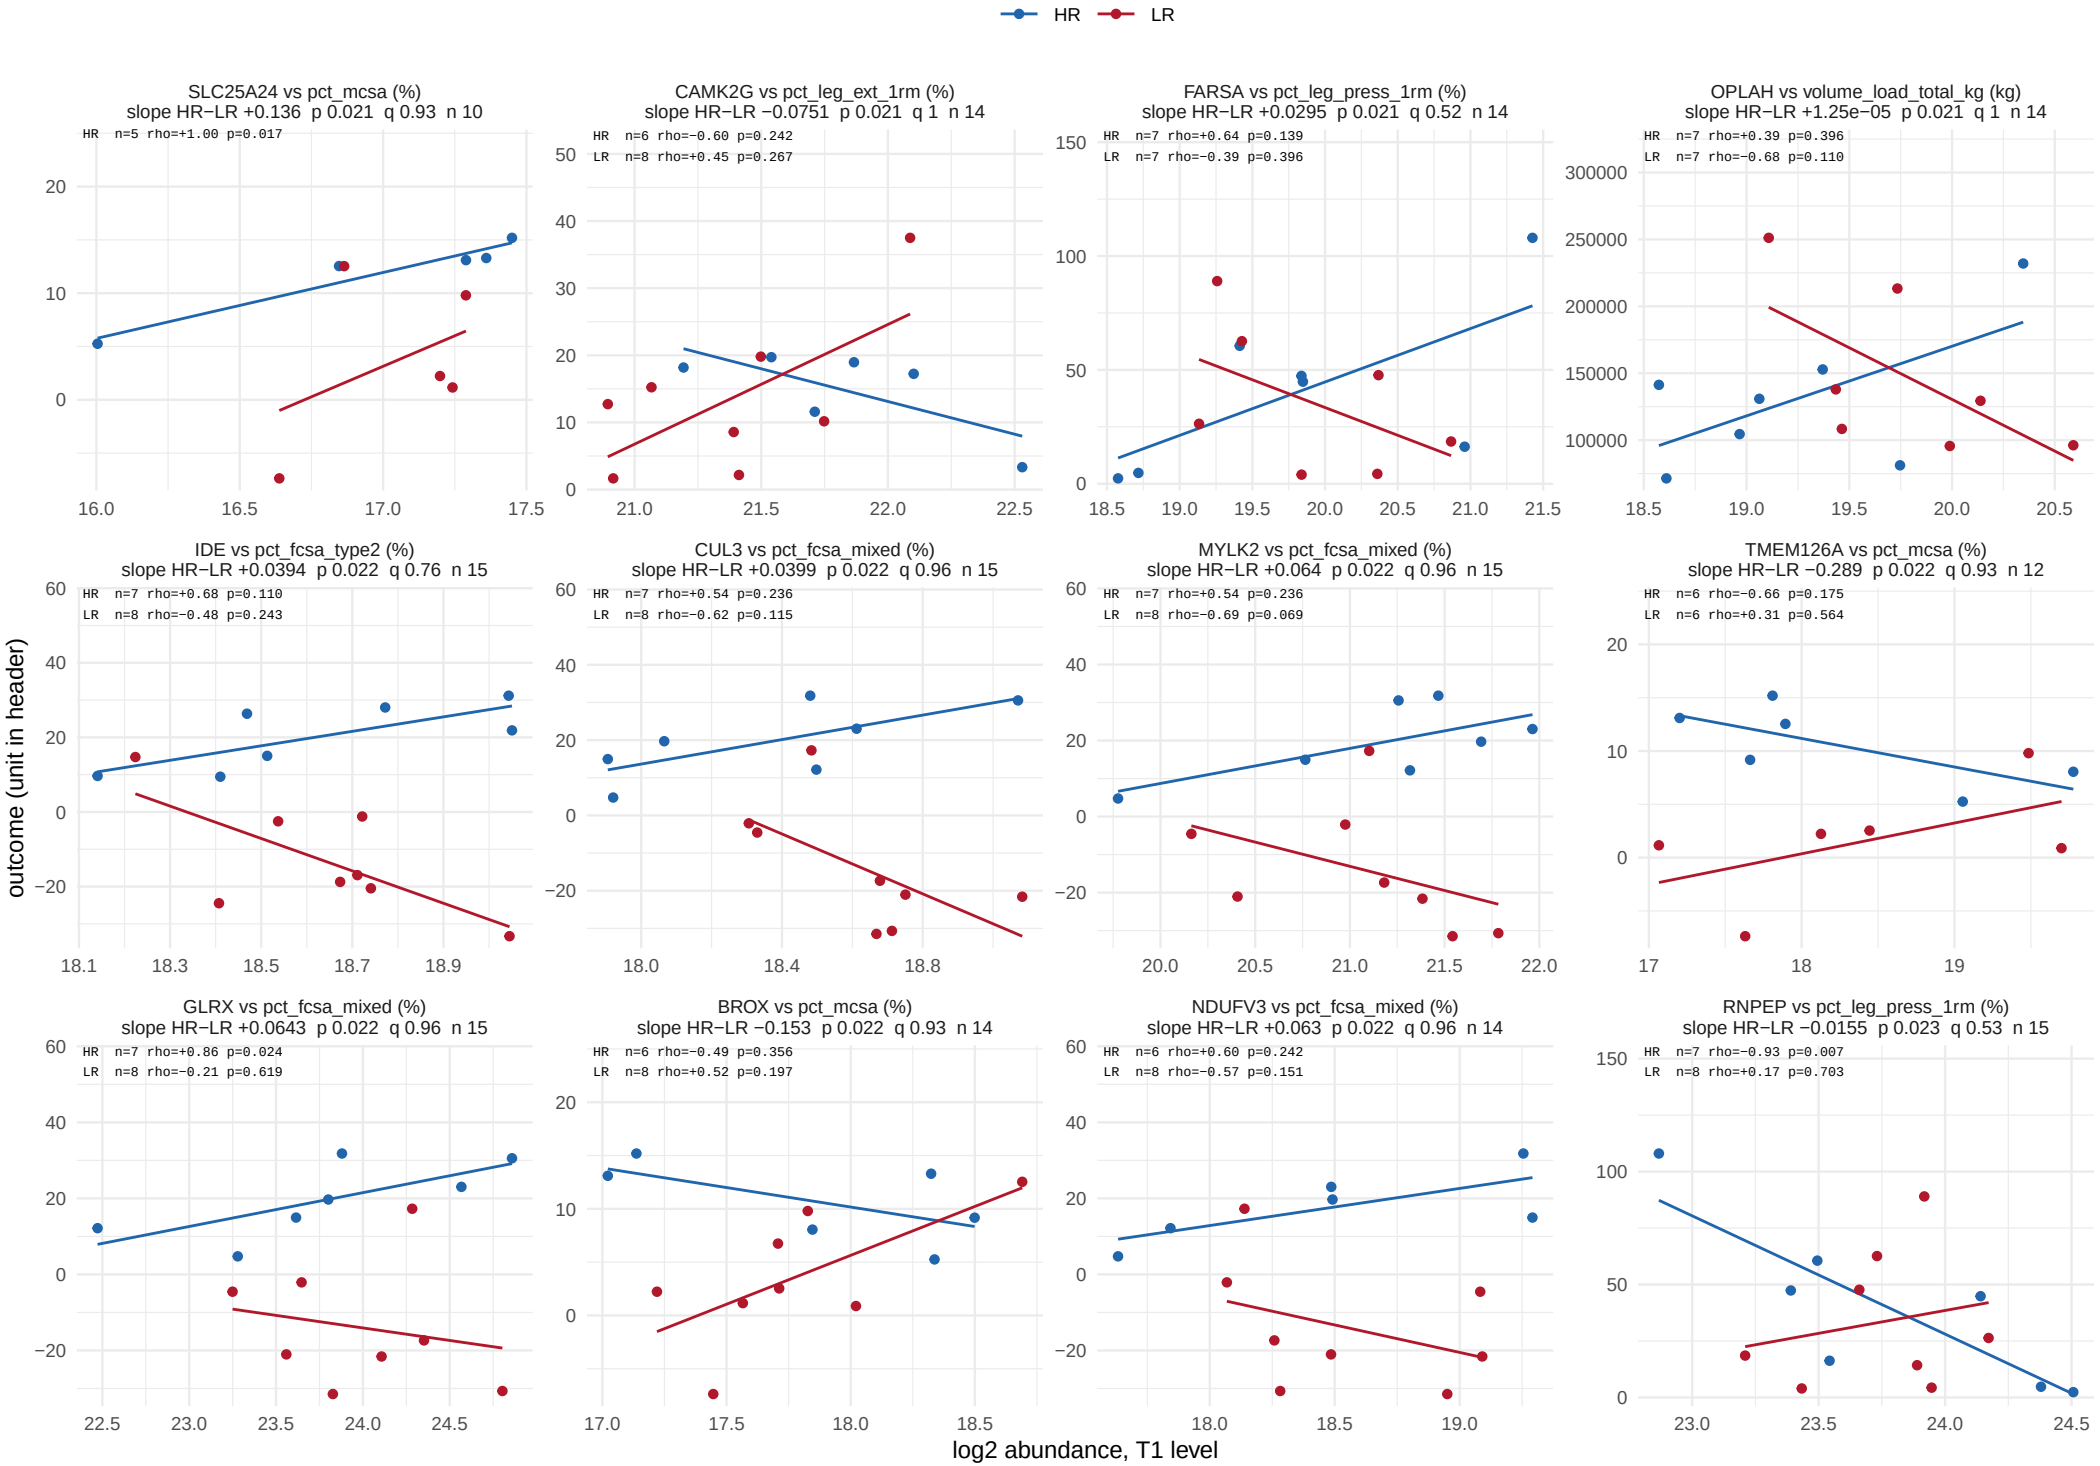

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


451 of 10266 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 18 of 38.

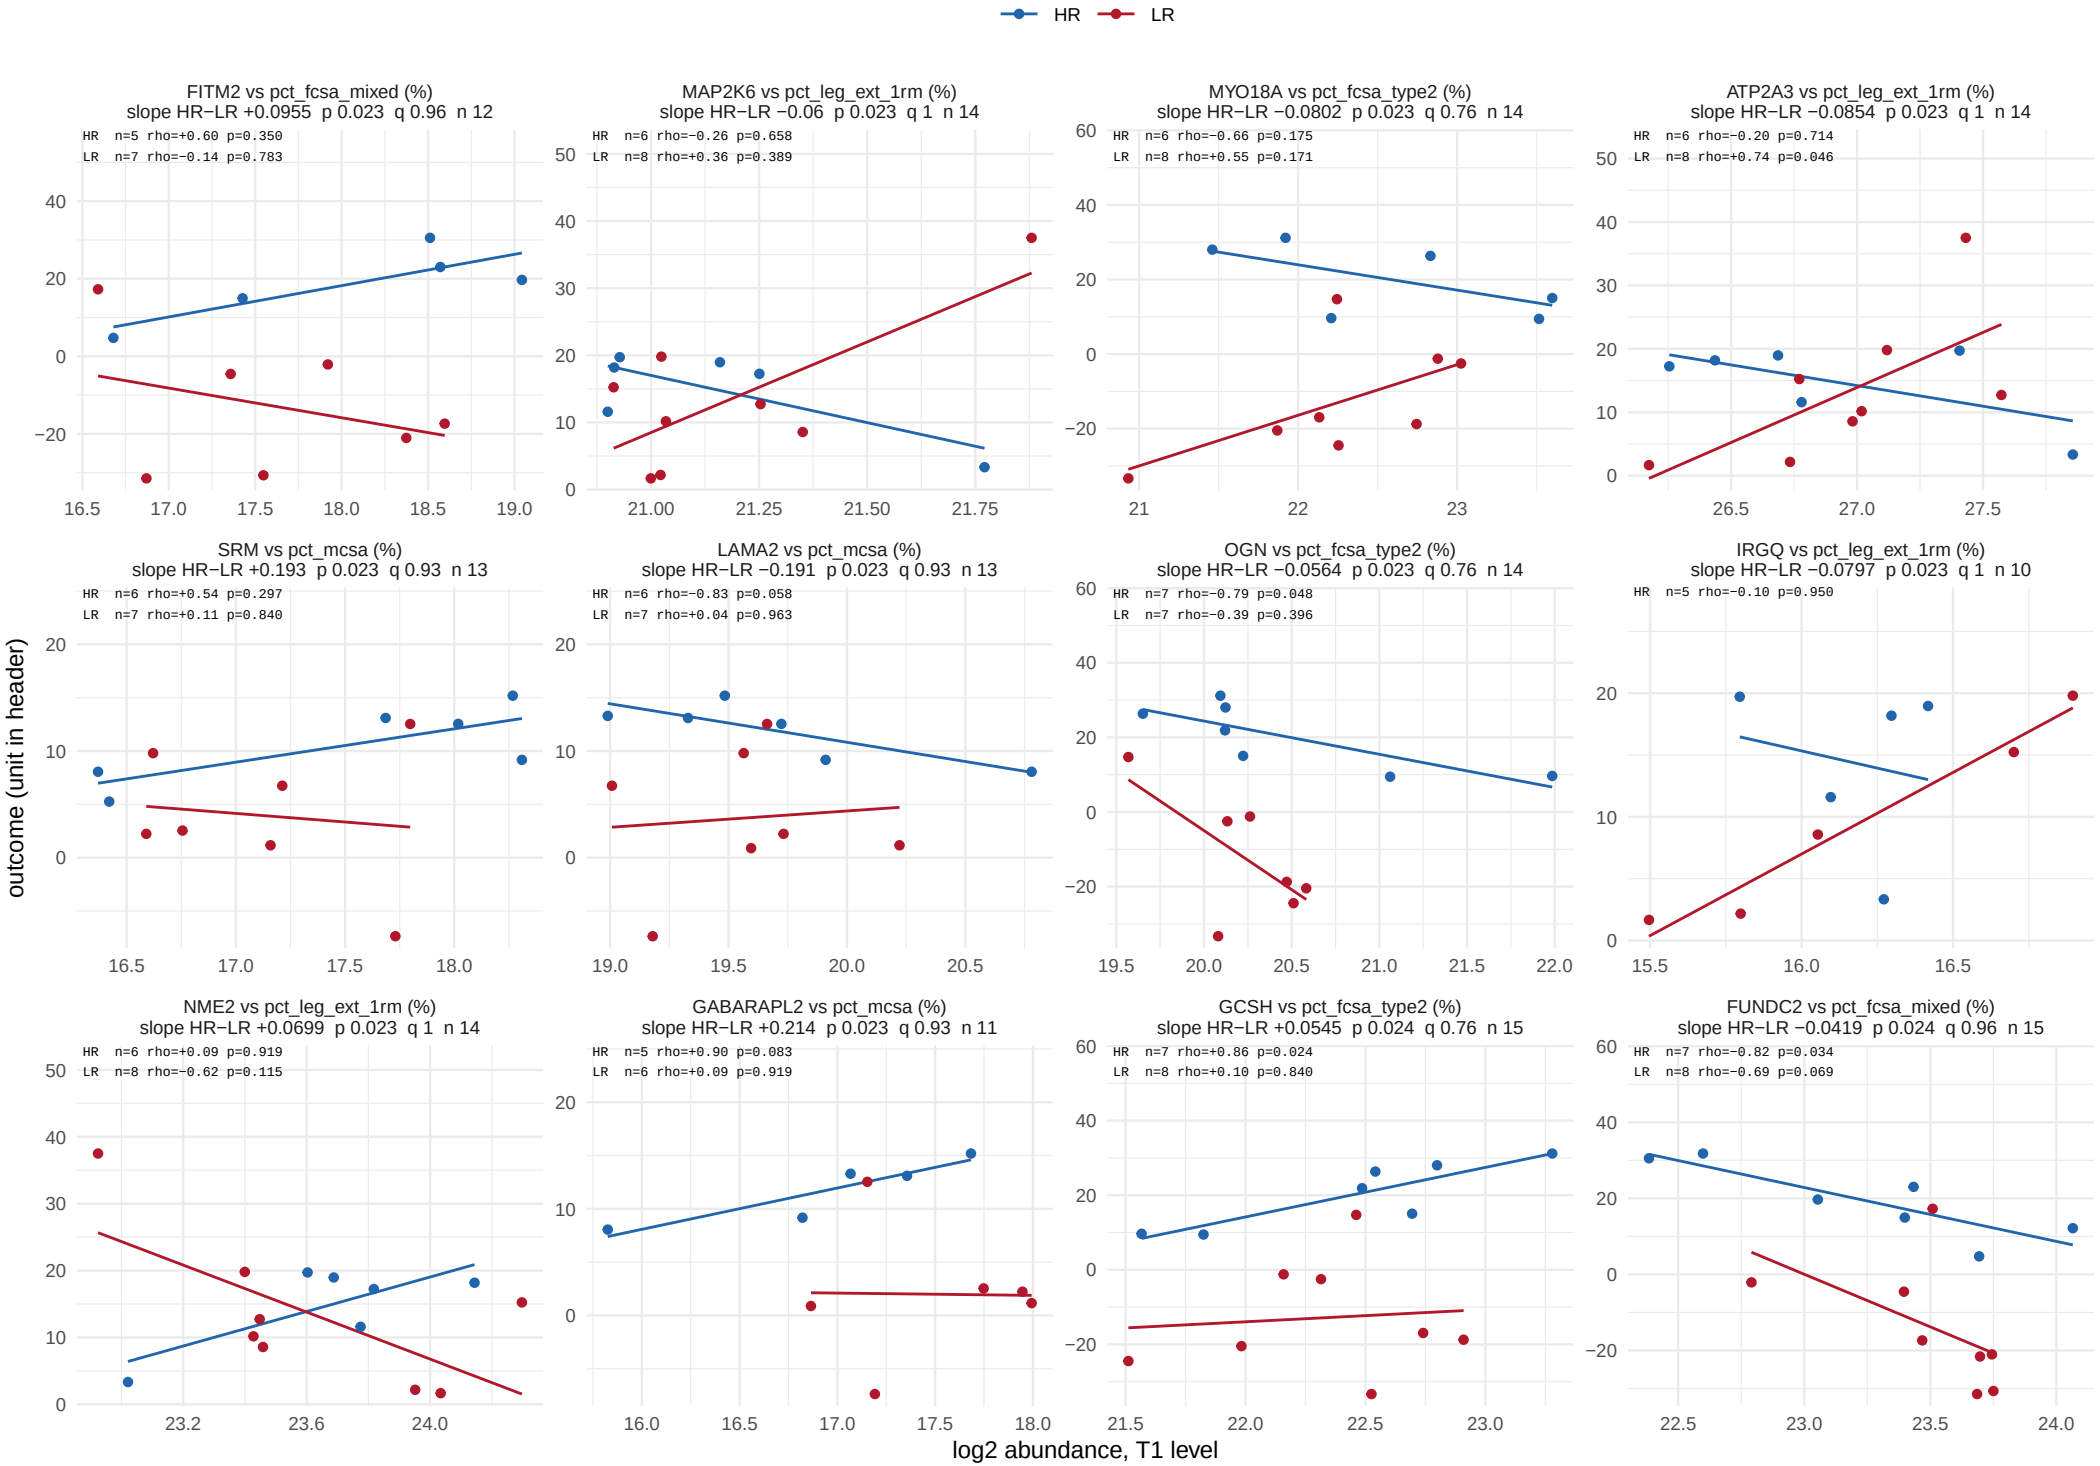

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


451 of 10266 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 19 of 38.

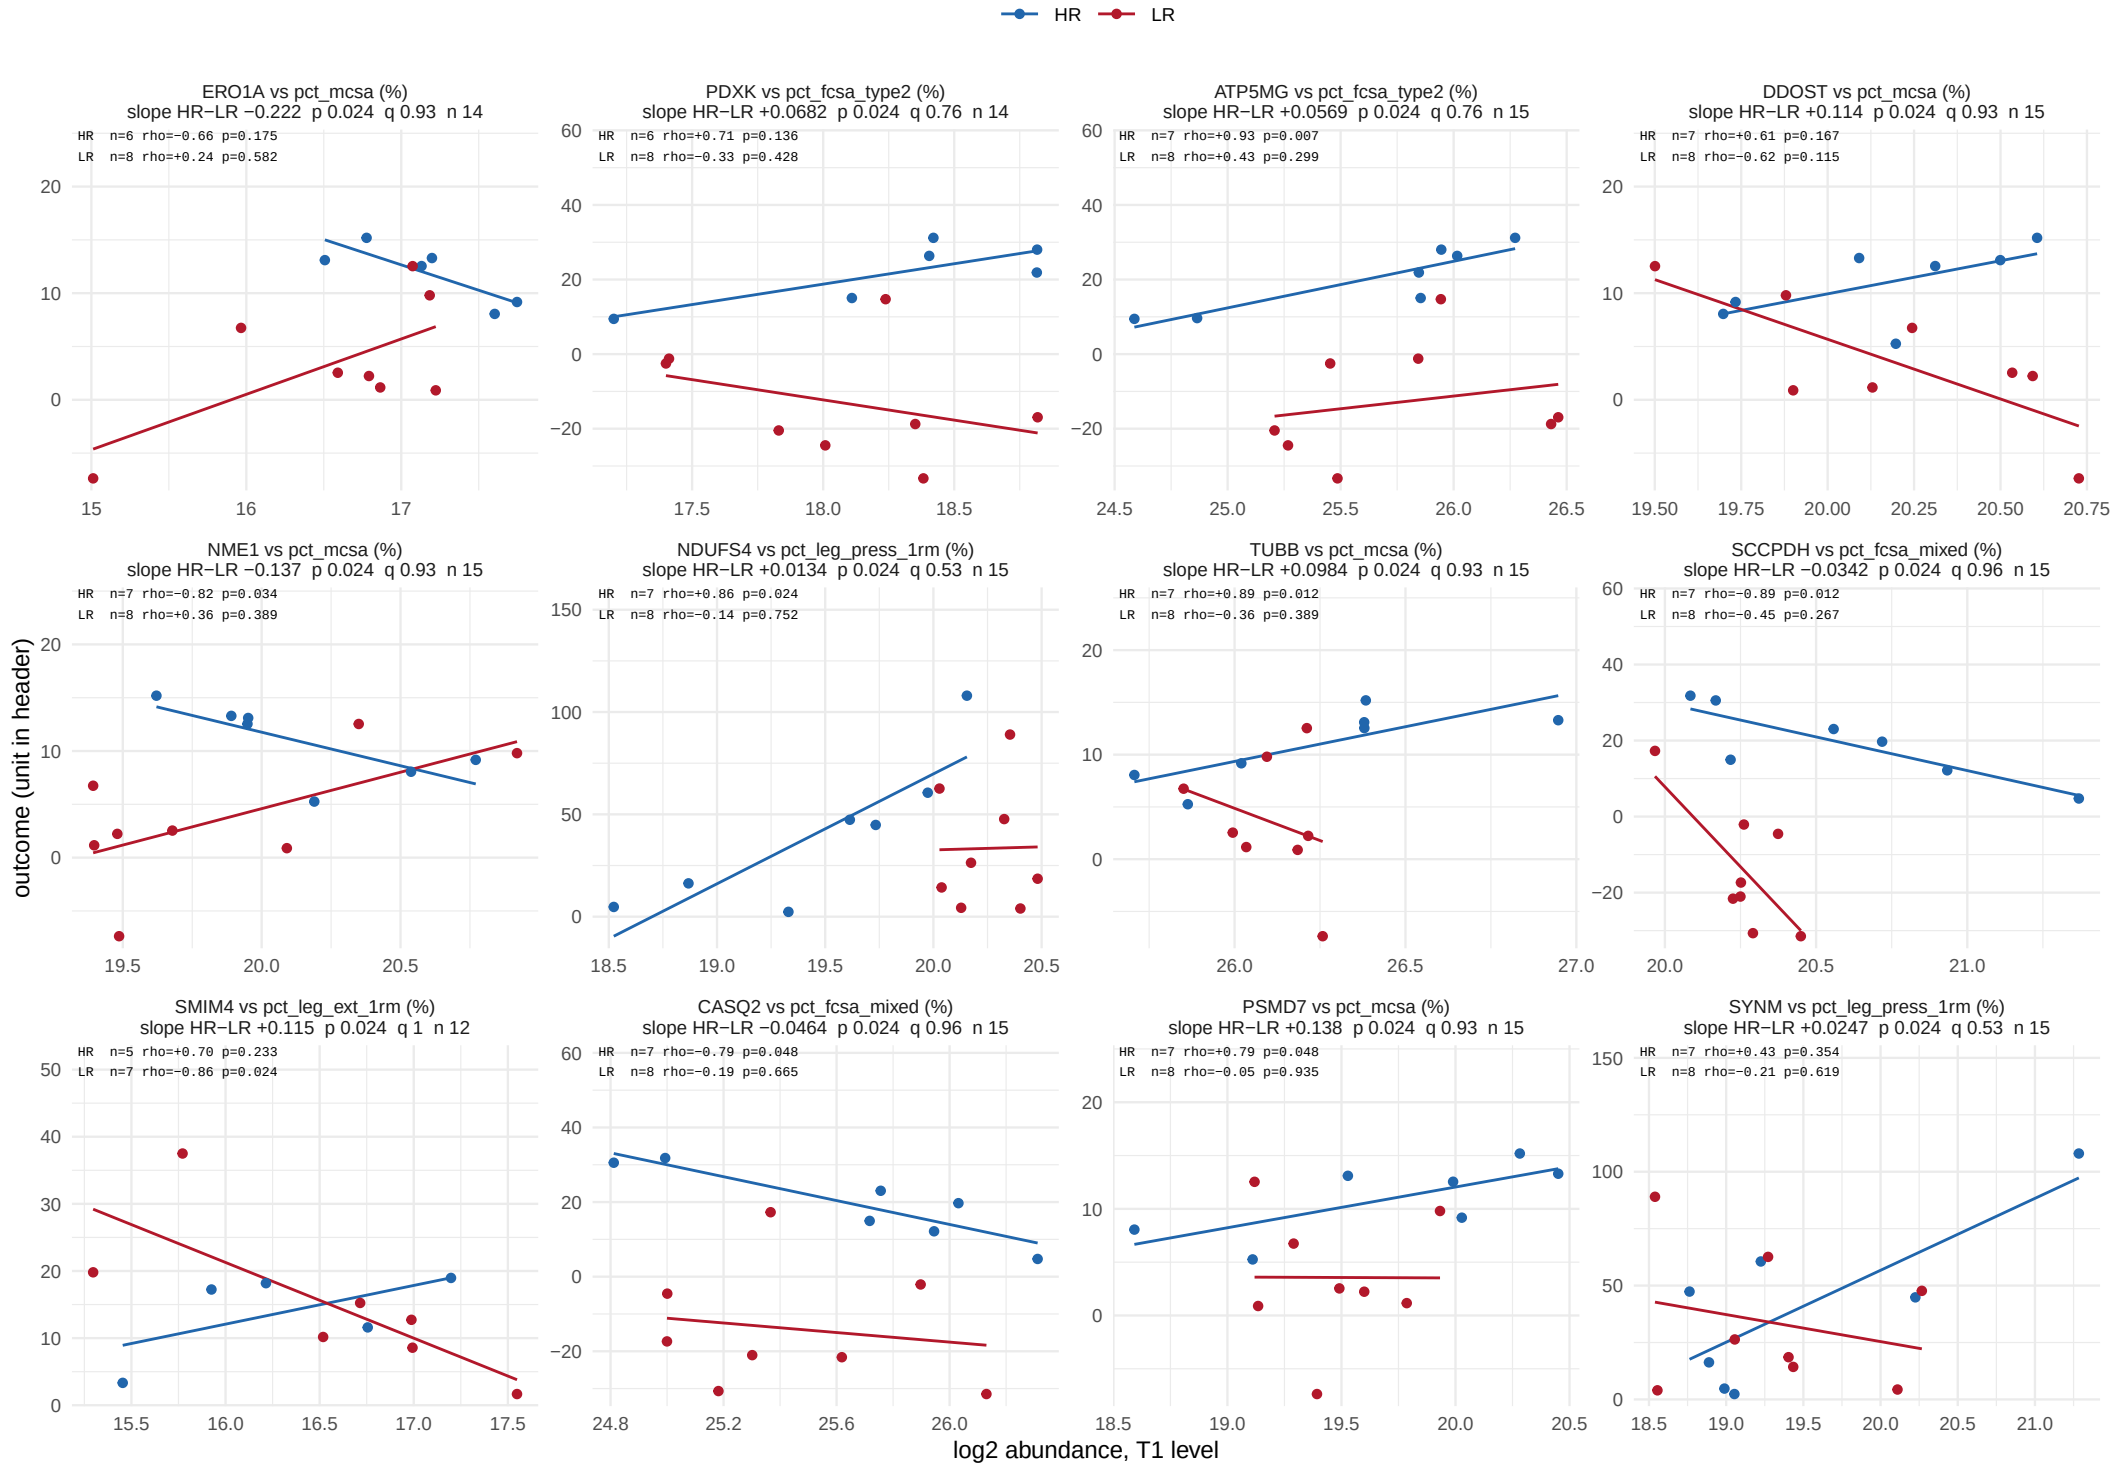

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window

451 of 10266 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 20 of 38.

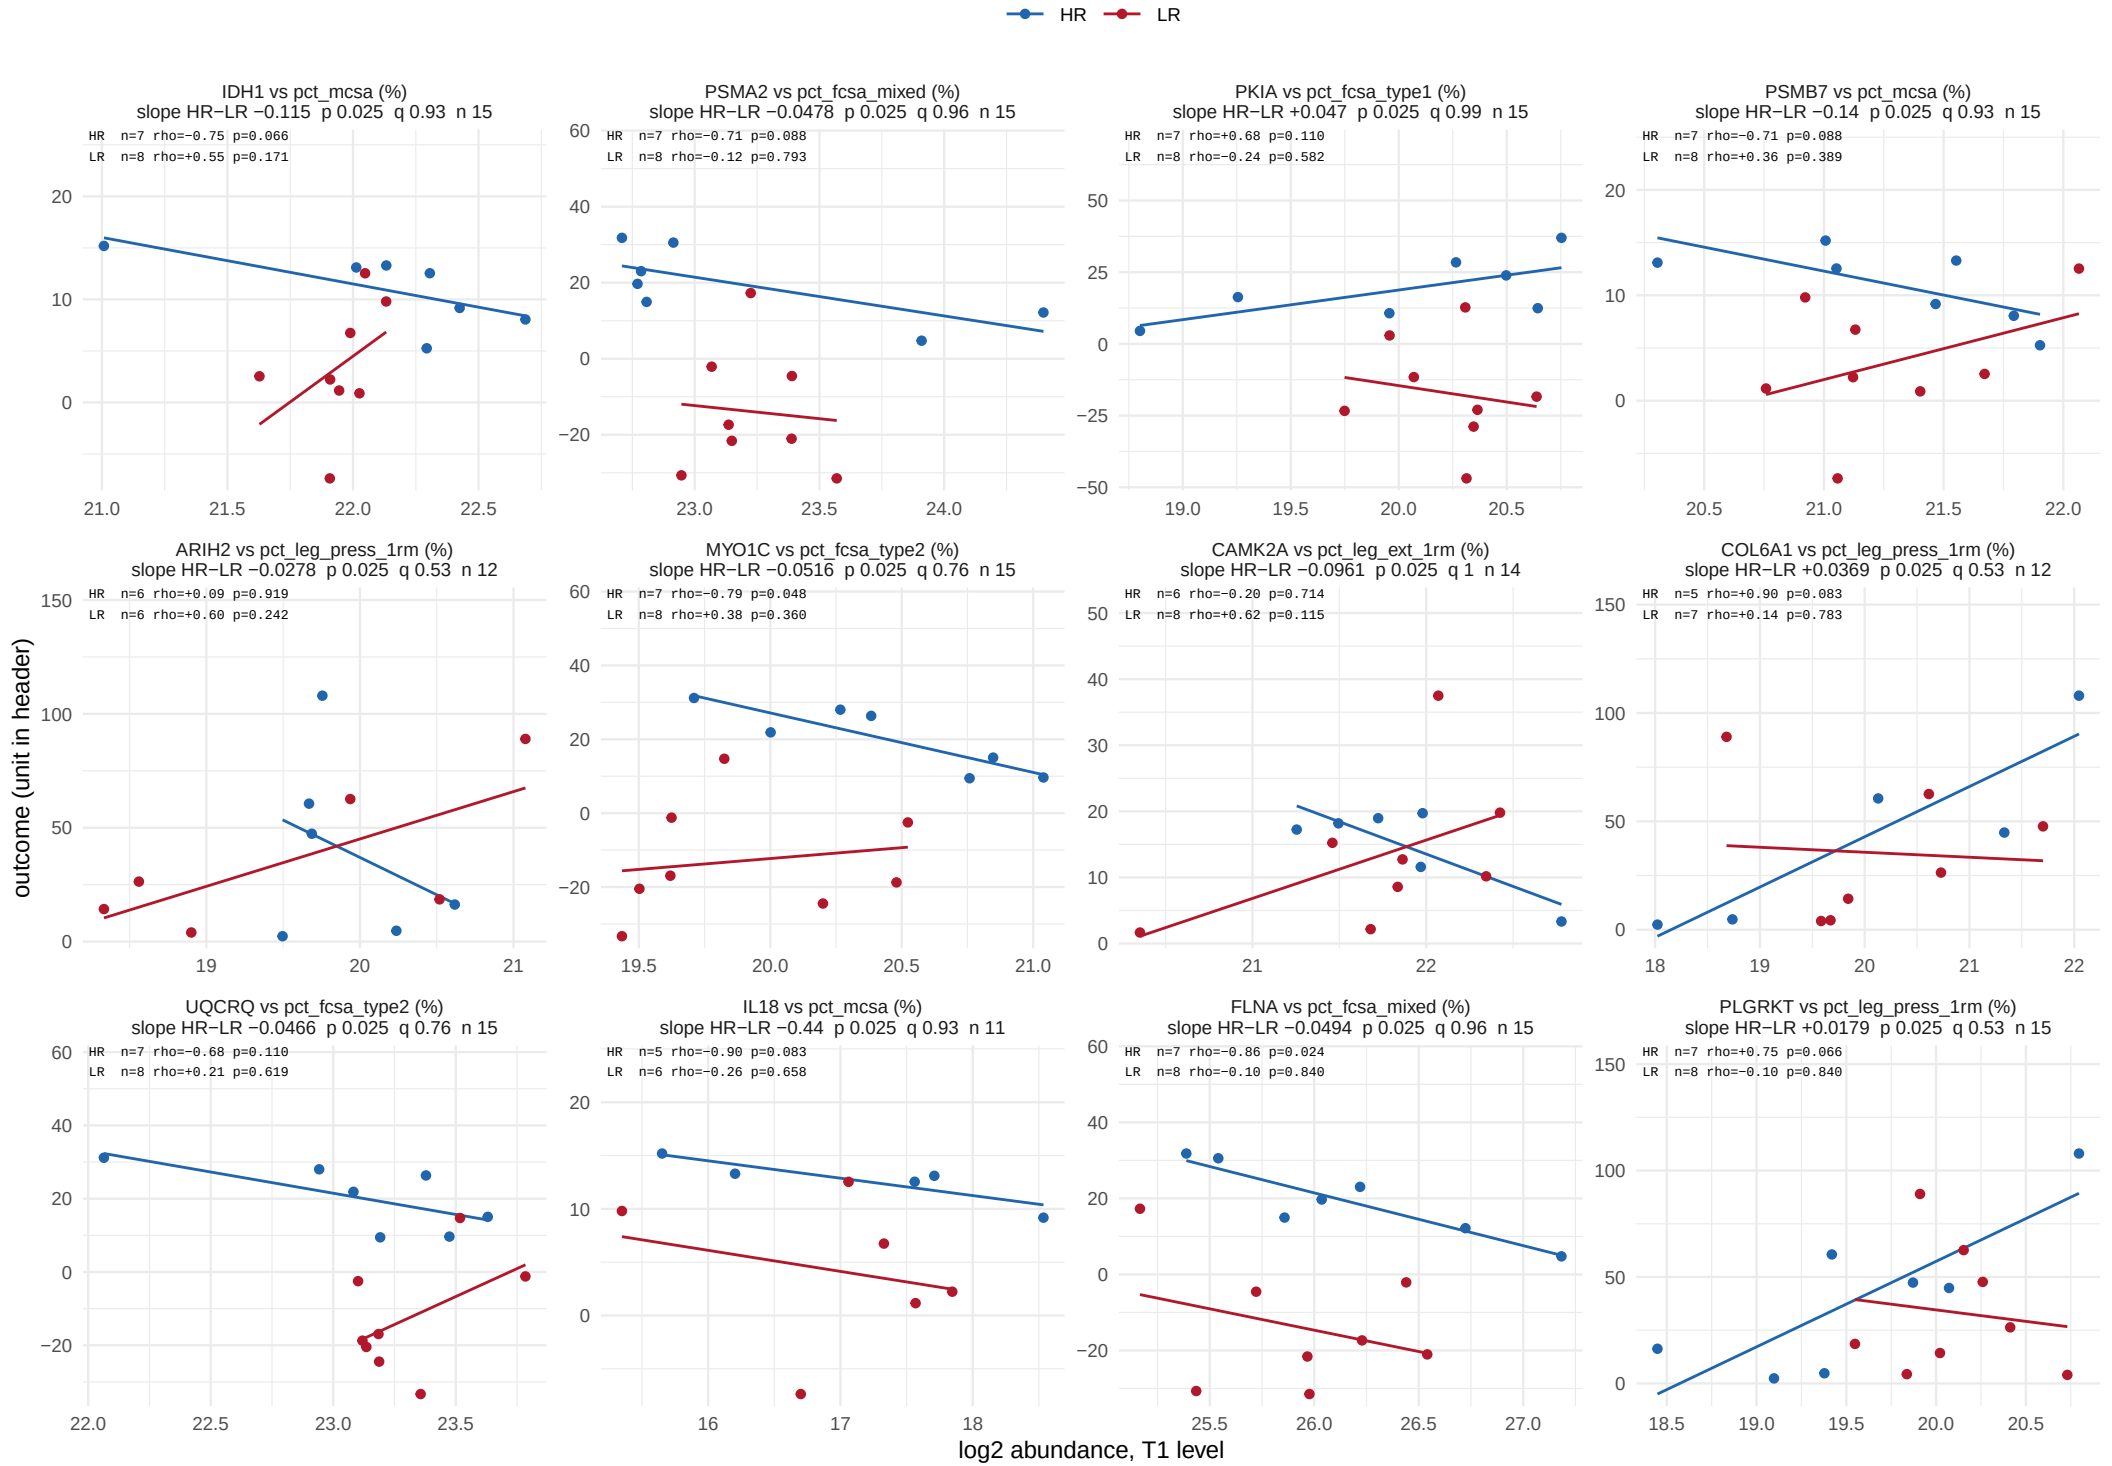

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


451 of 10266 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 21 of 38.



One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


451 of 10266 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 22 of 38.

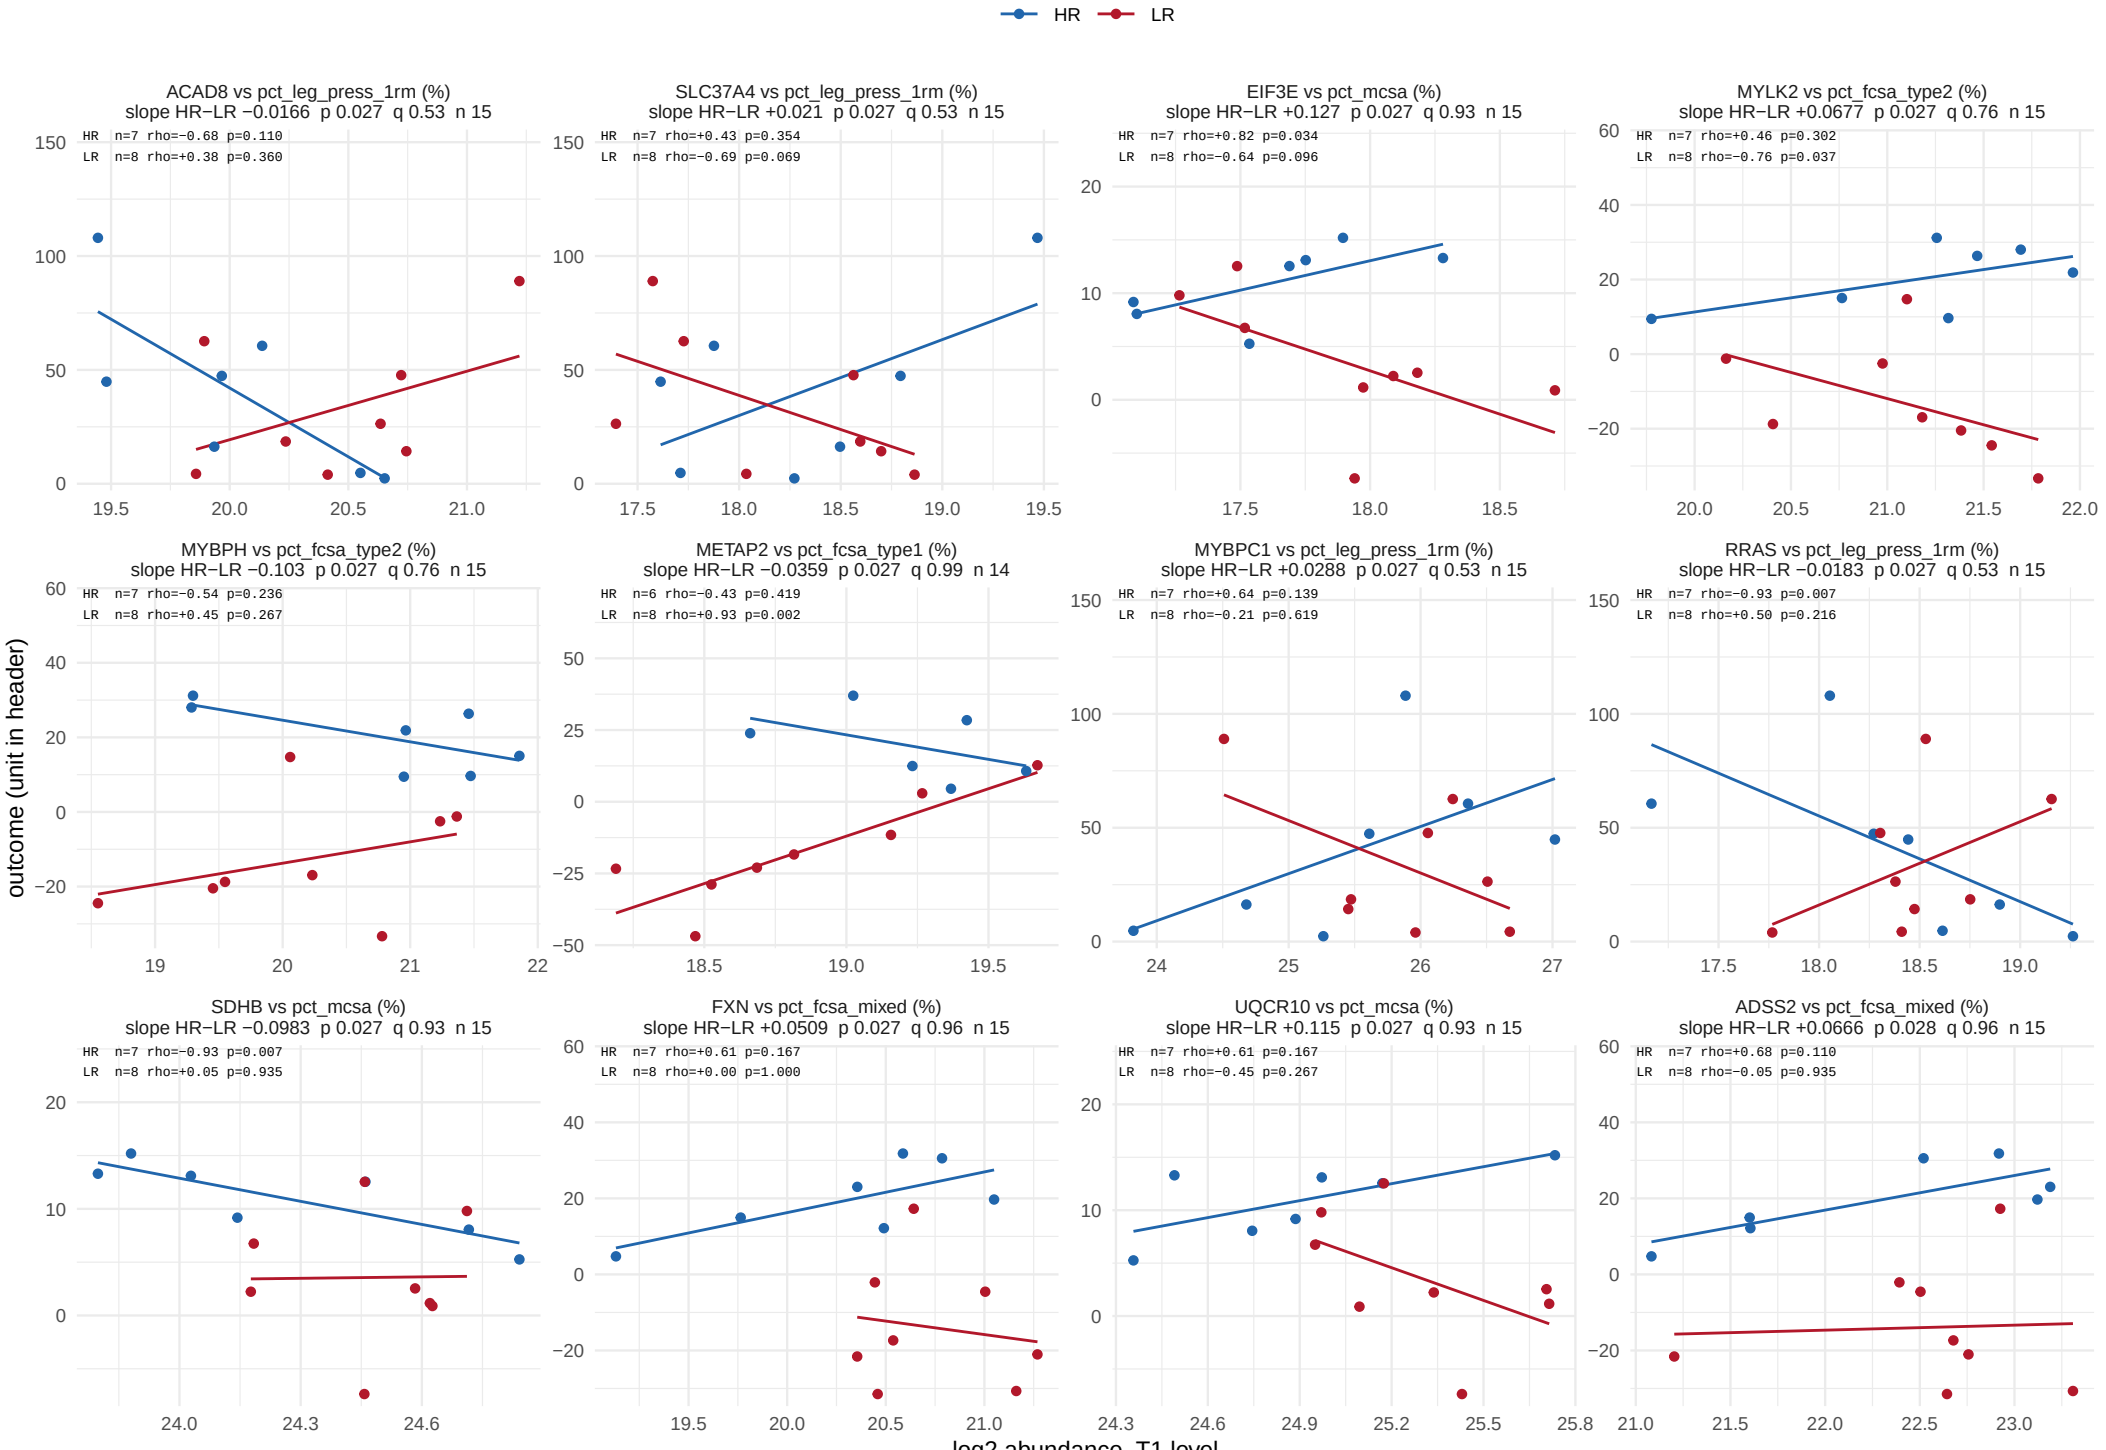

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


451 of 10266 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 23 of 38.

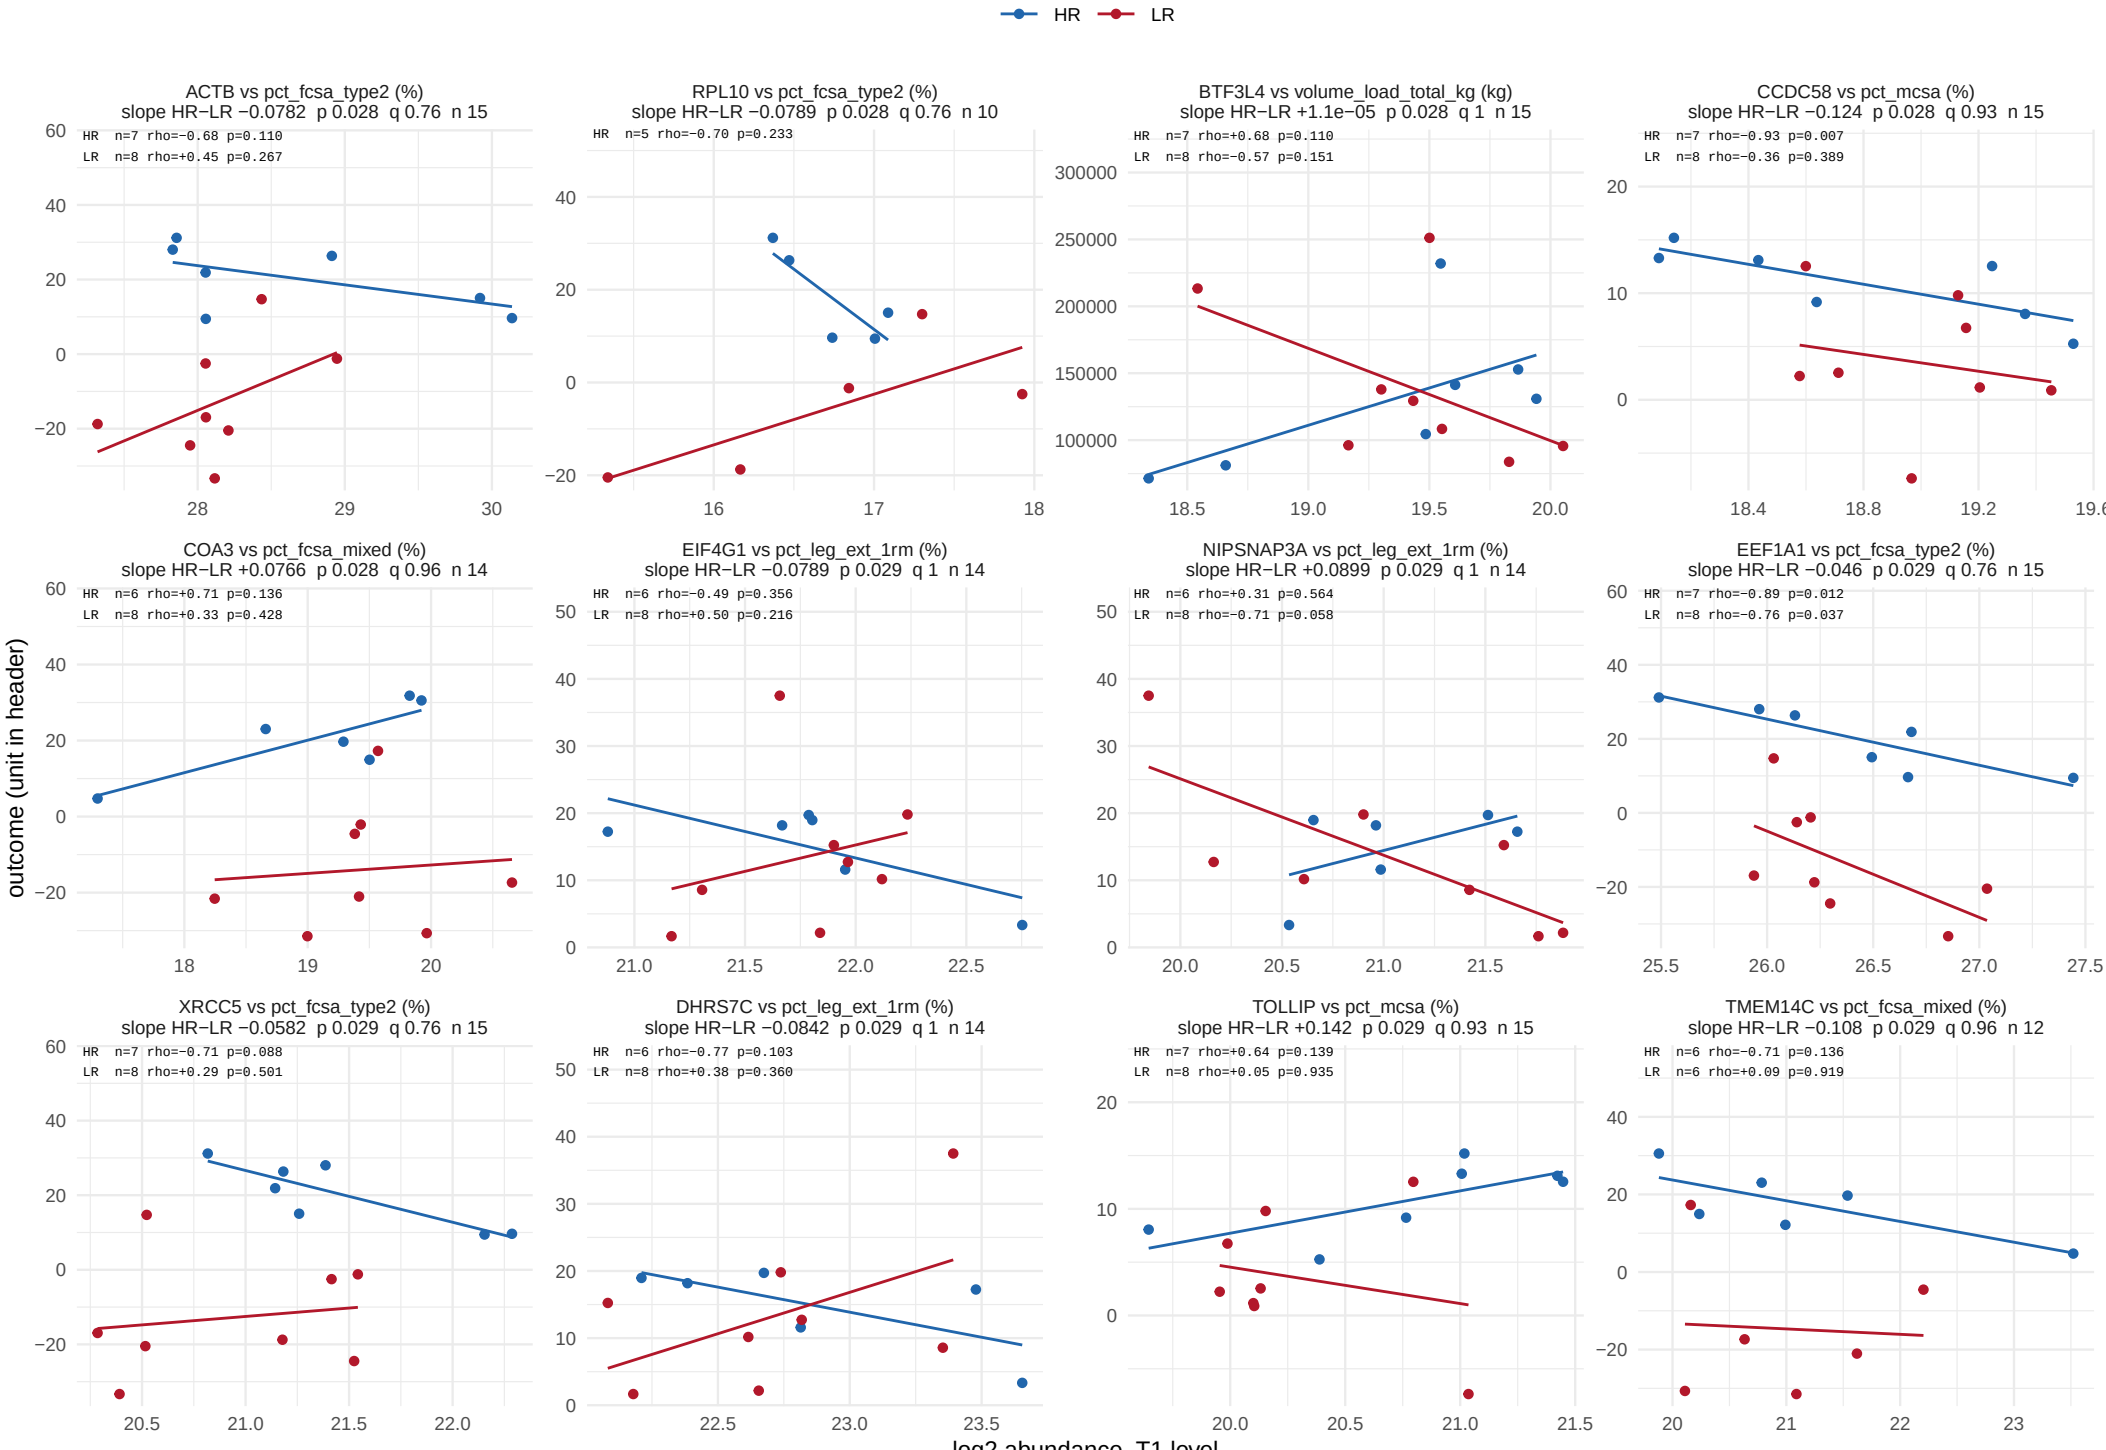

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


451 of 10266 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 24 of 38.

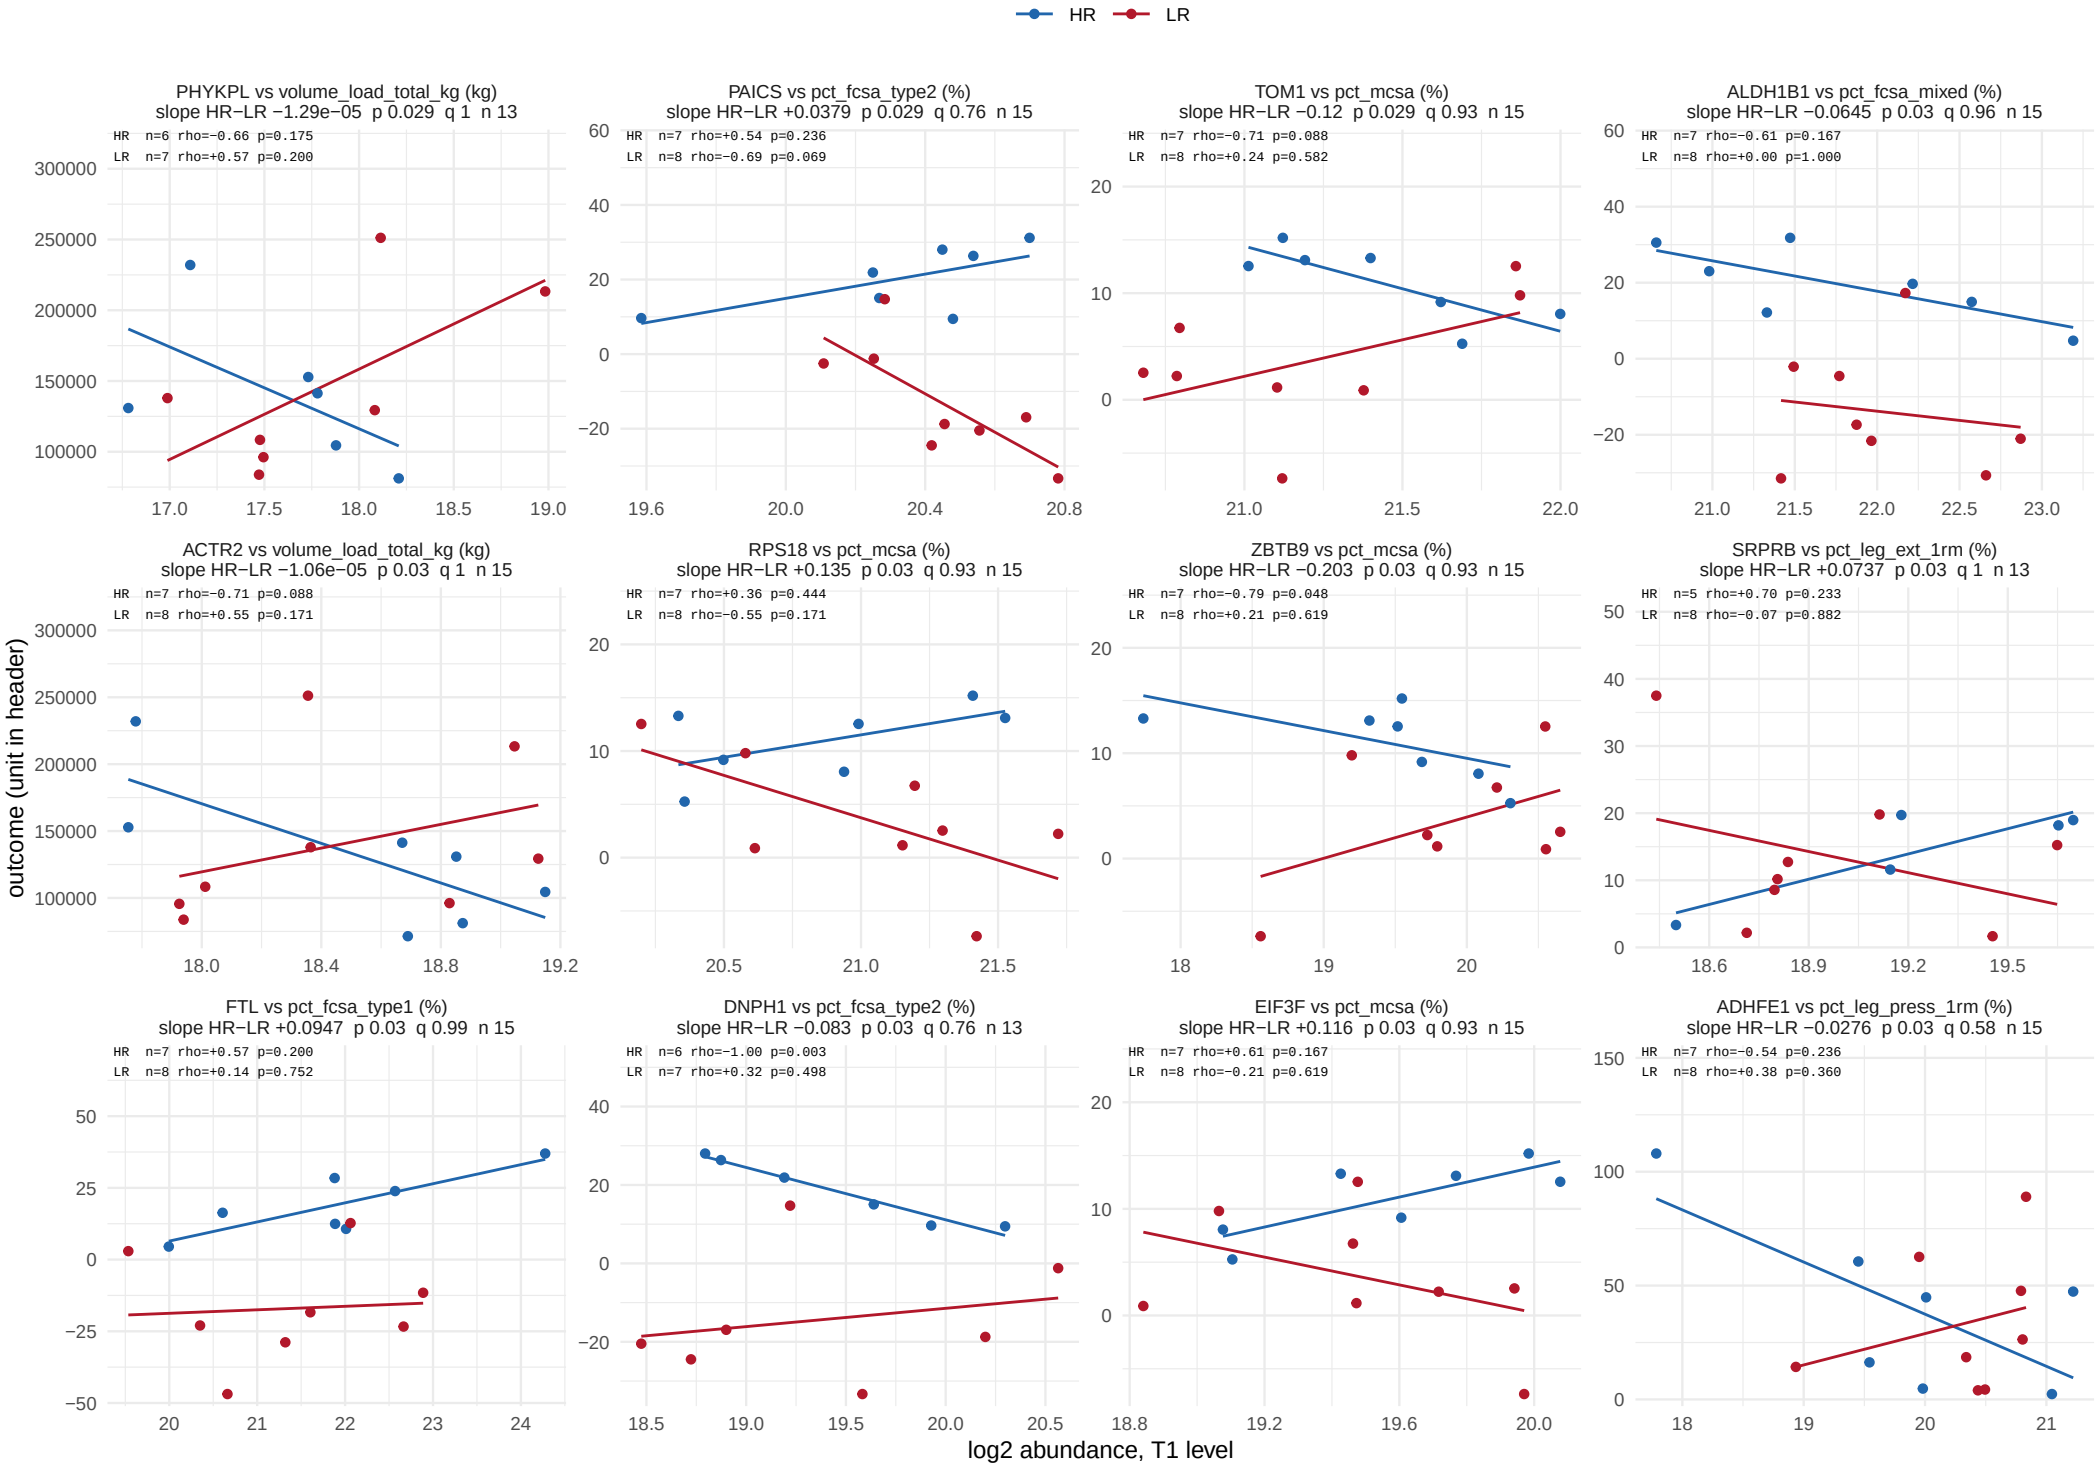

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


451 of 10266 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 25 of 38.

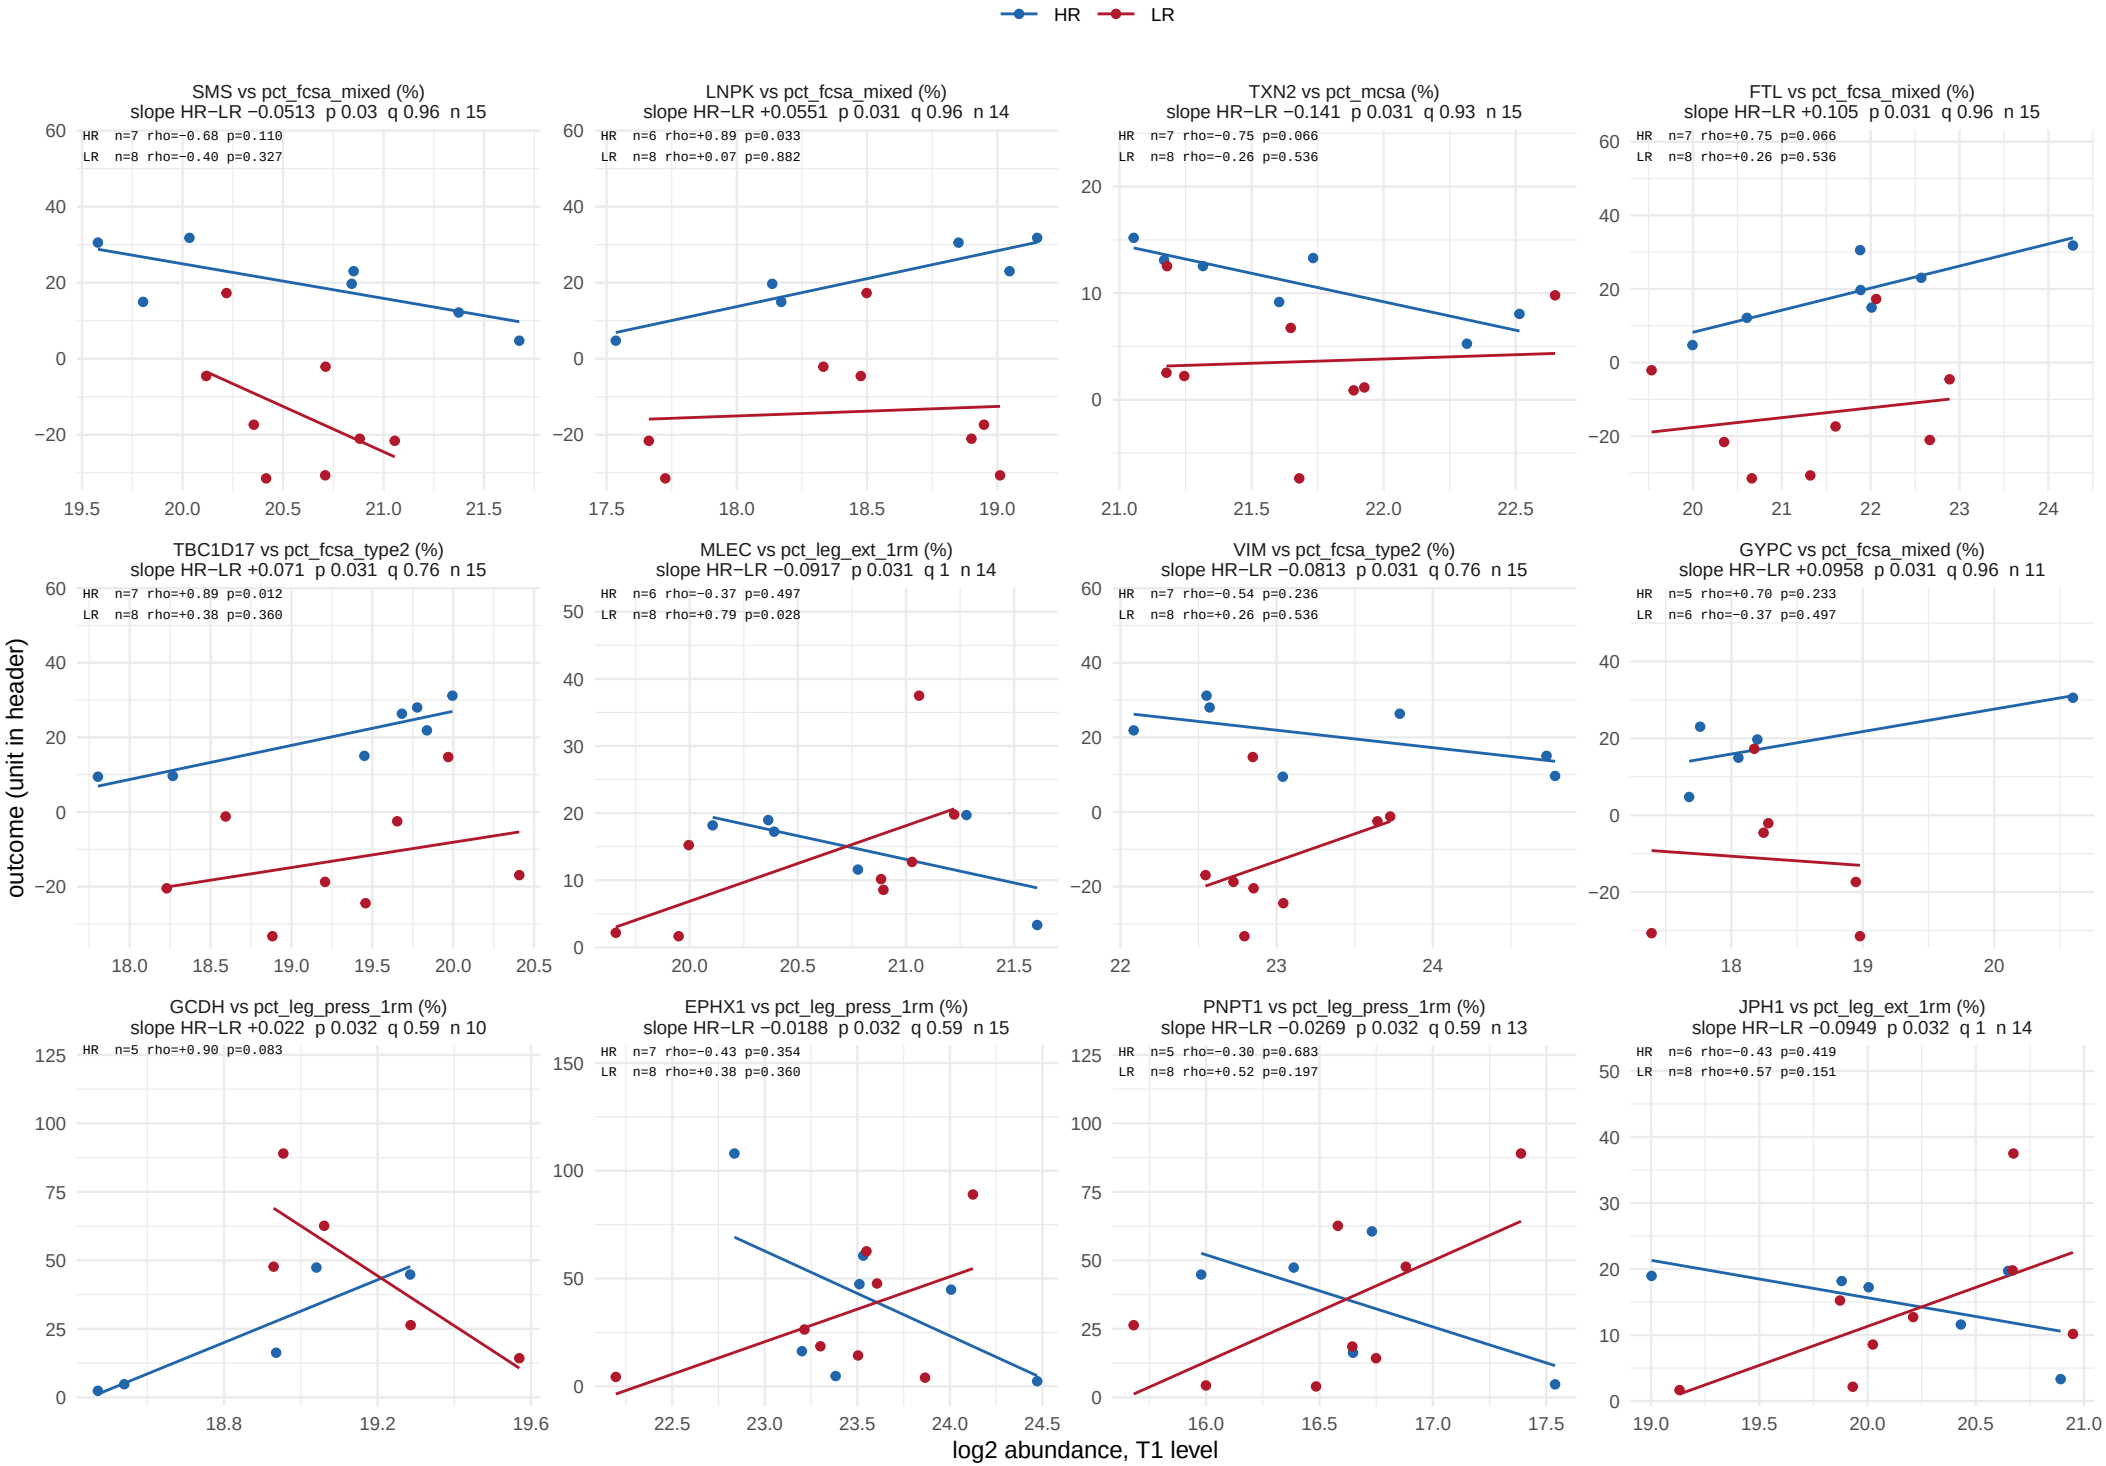

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


451 of 10266 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 26 of 38.

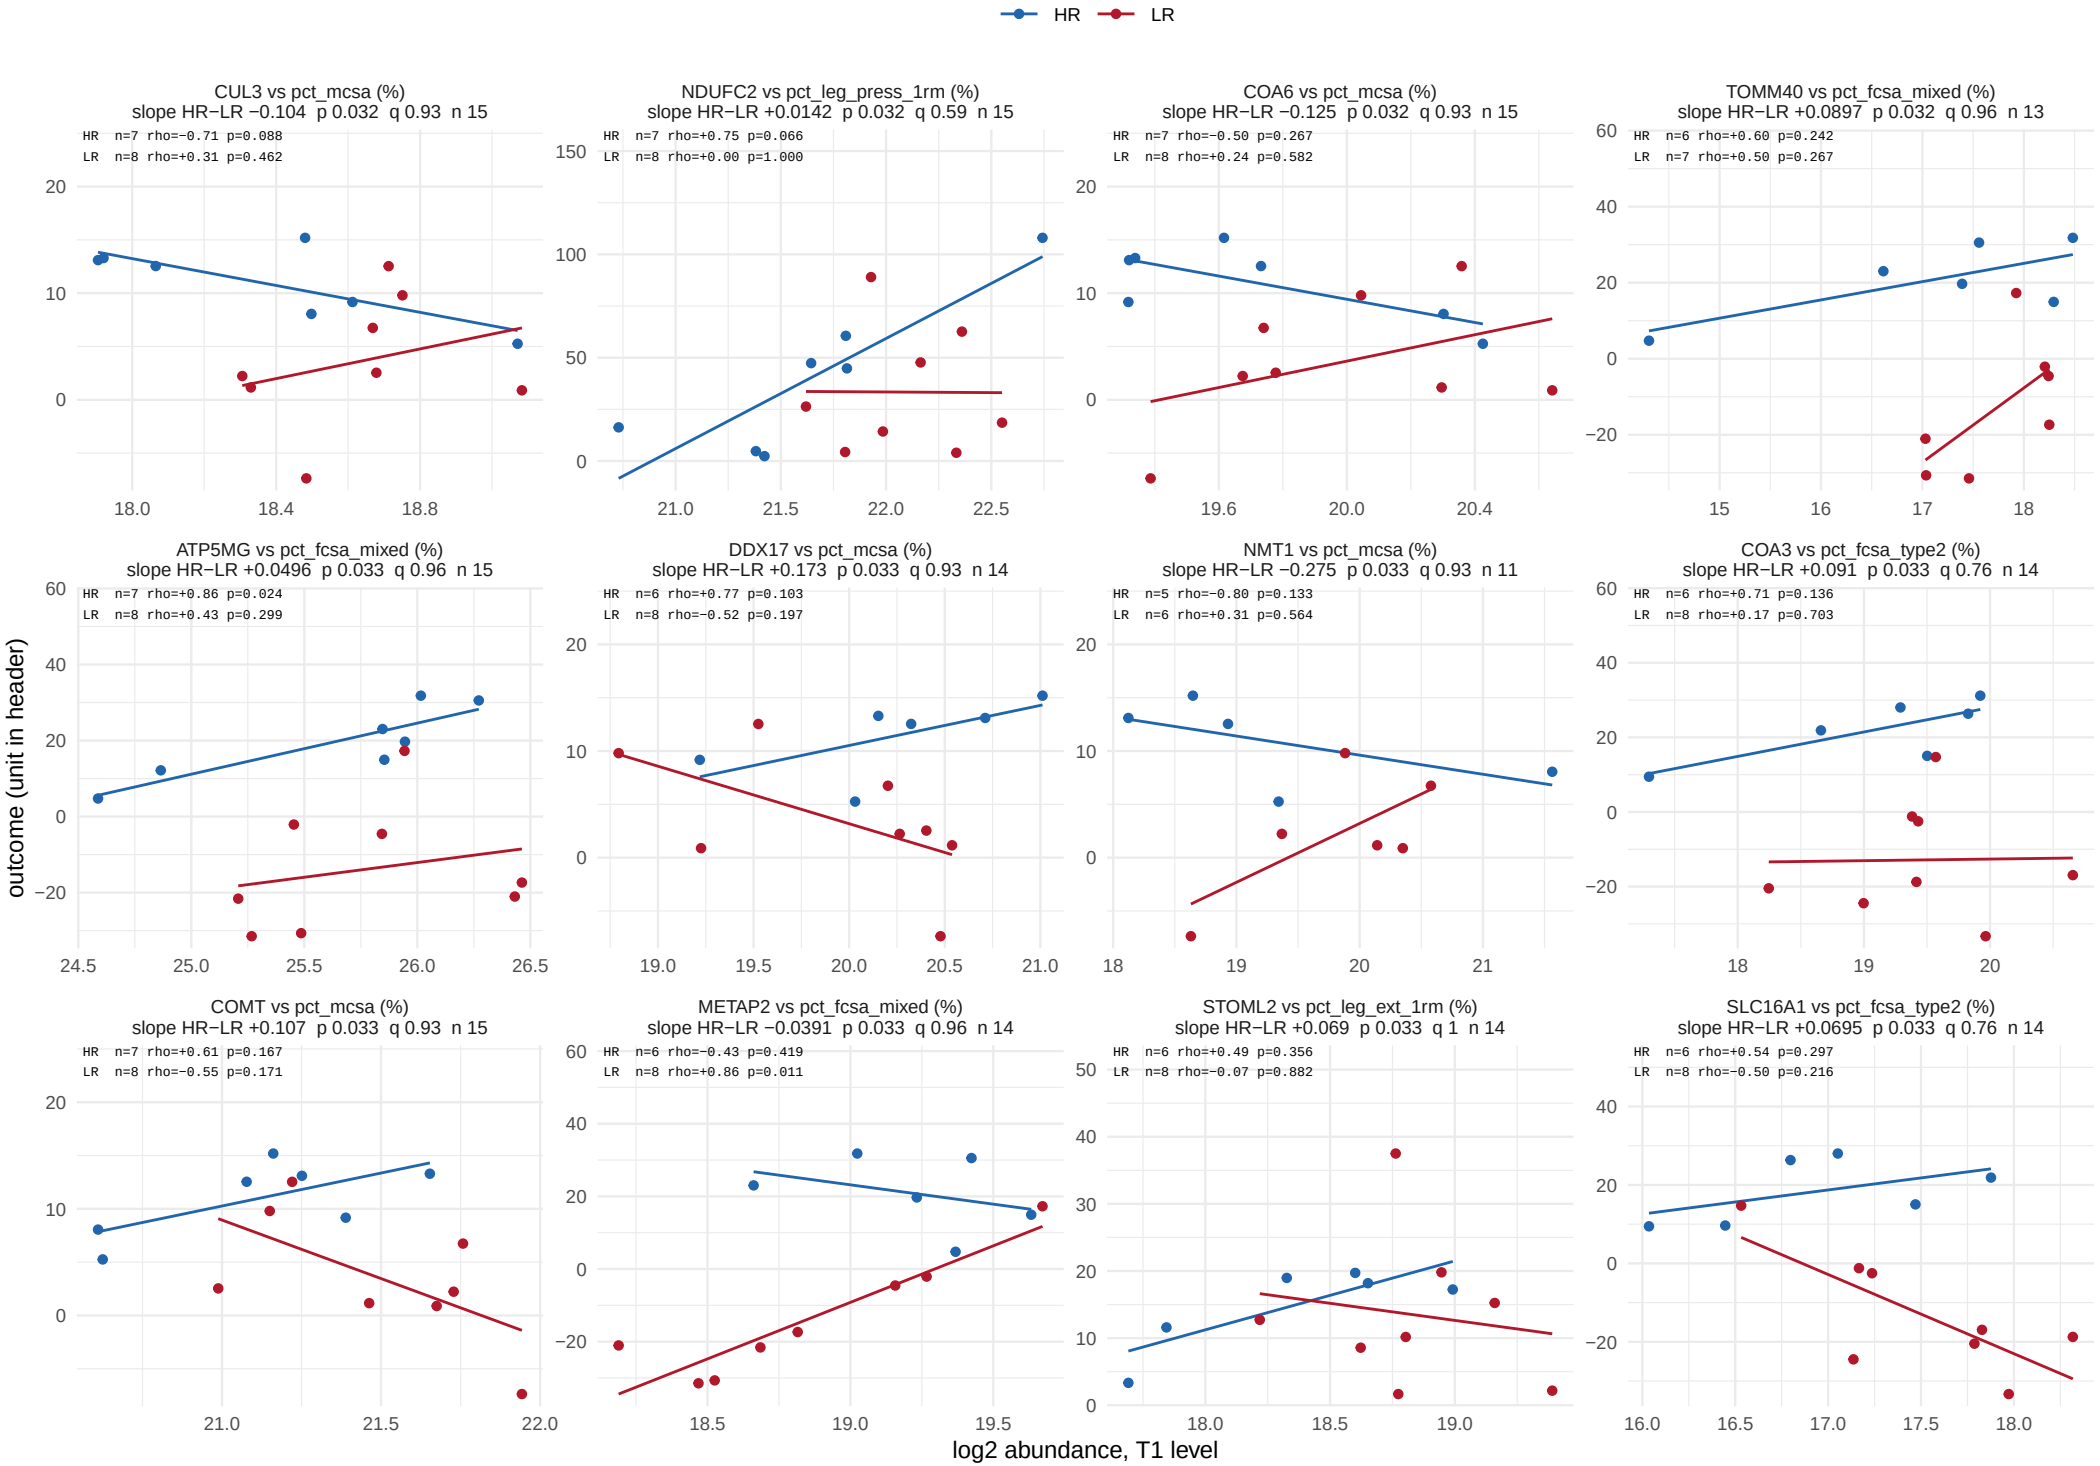

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


451 of 10266 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 27 of 38.

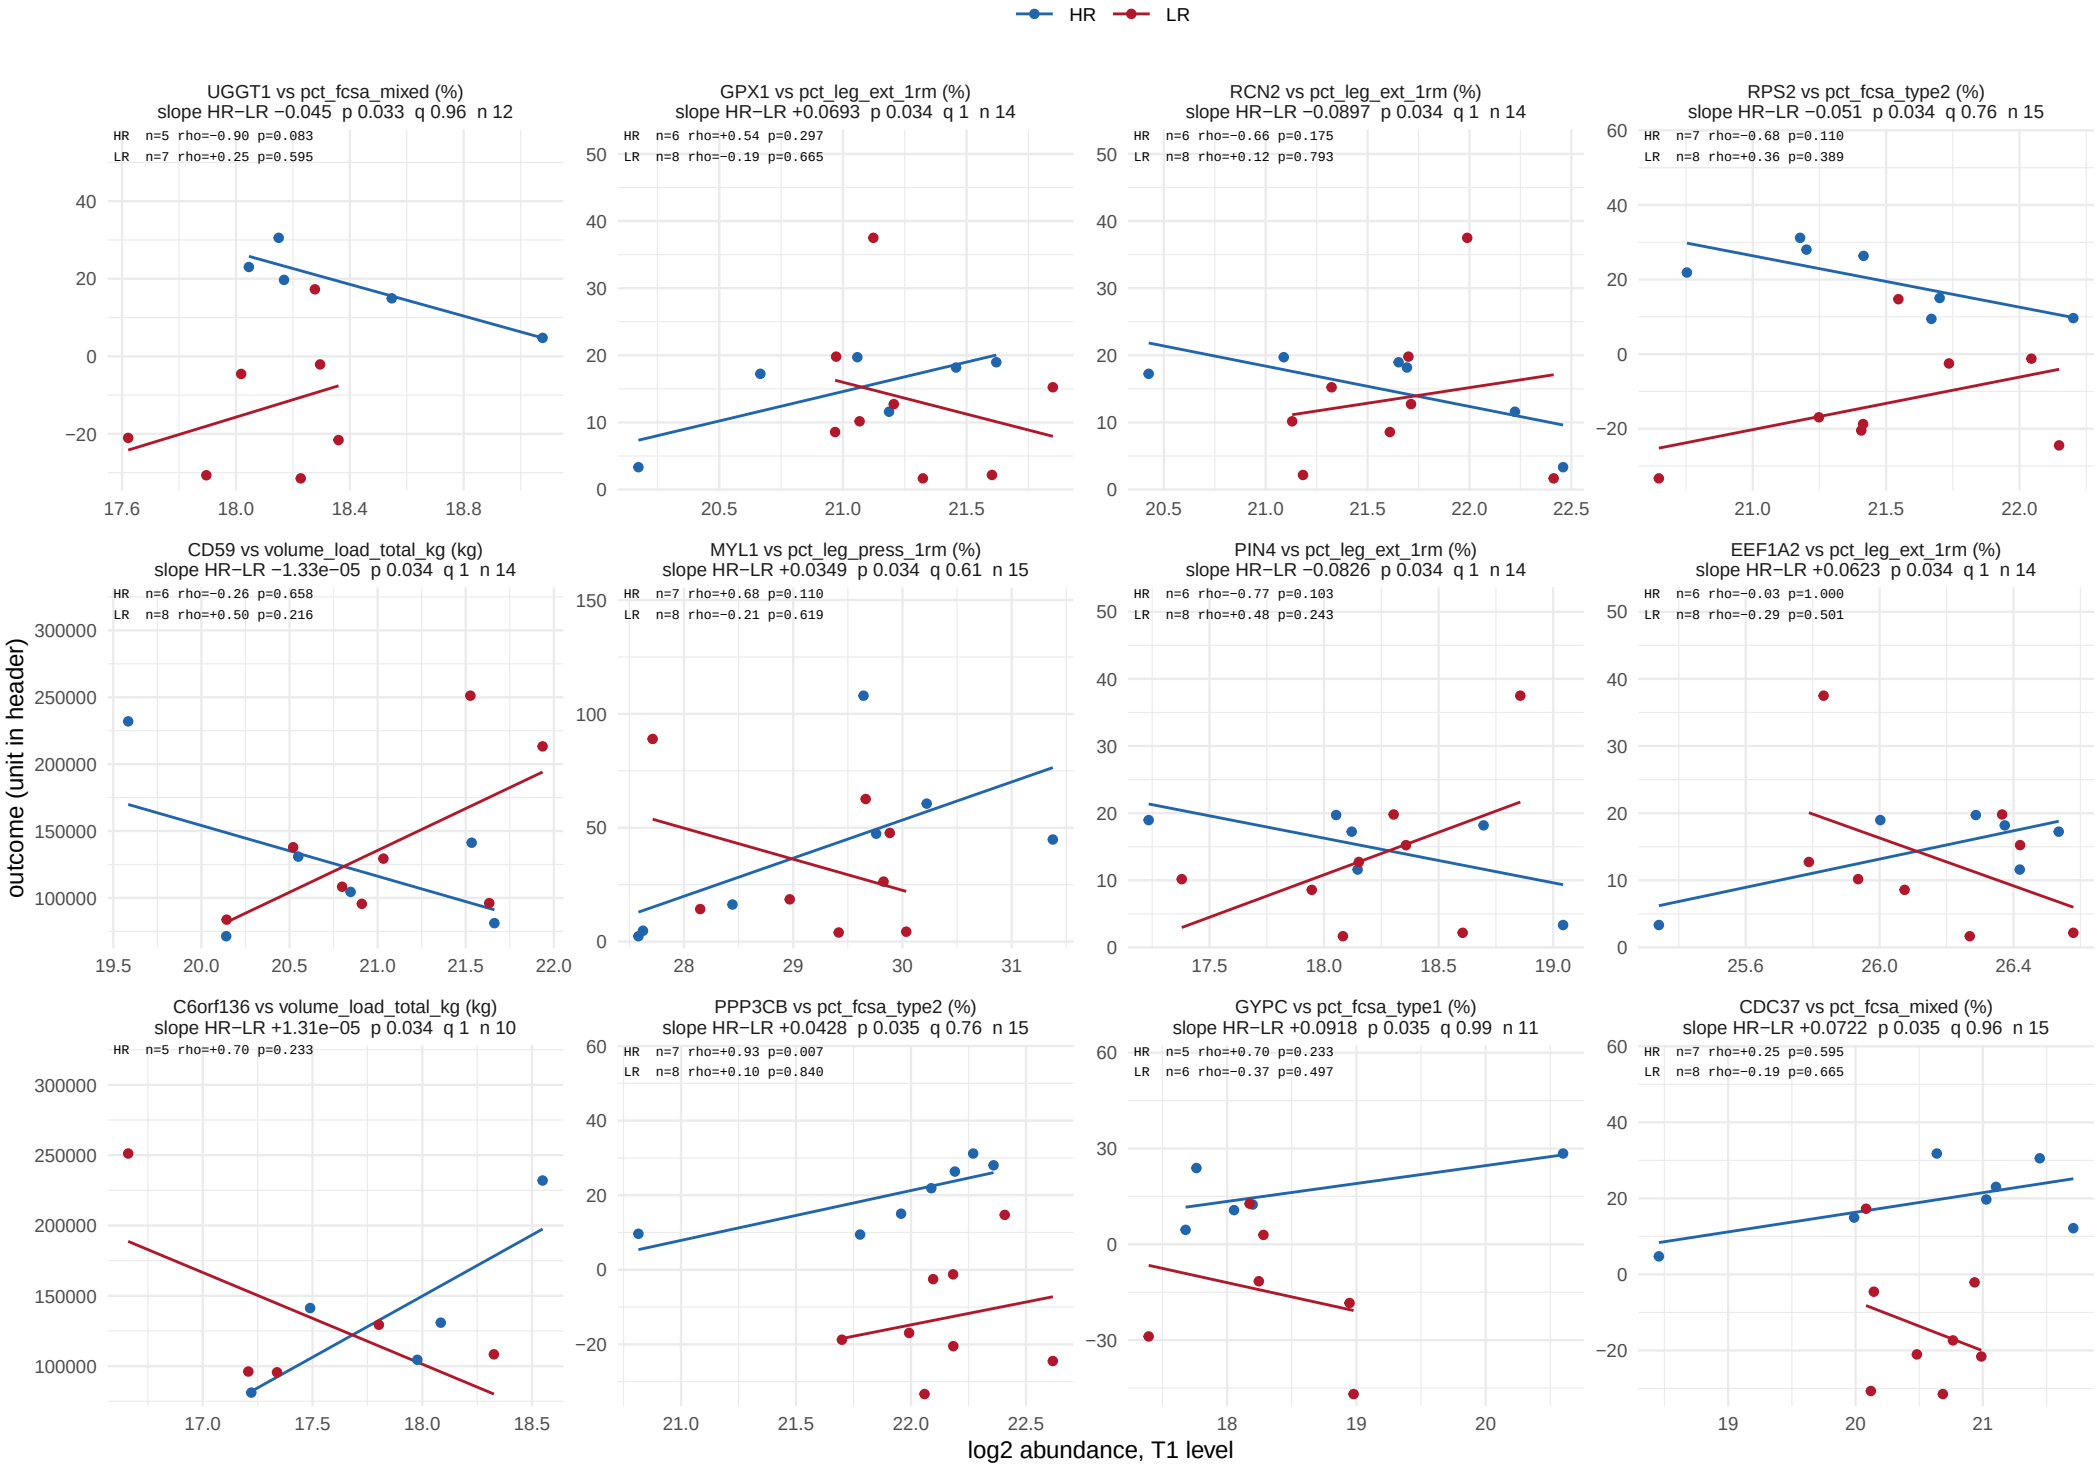

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


451 of 10266 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 28 of 38.

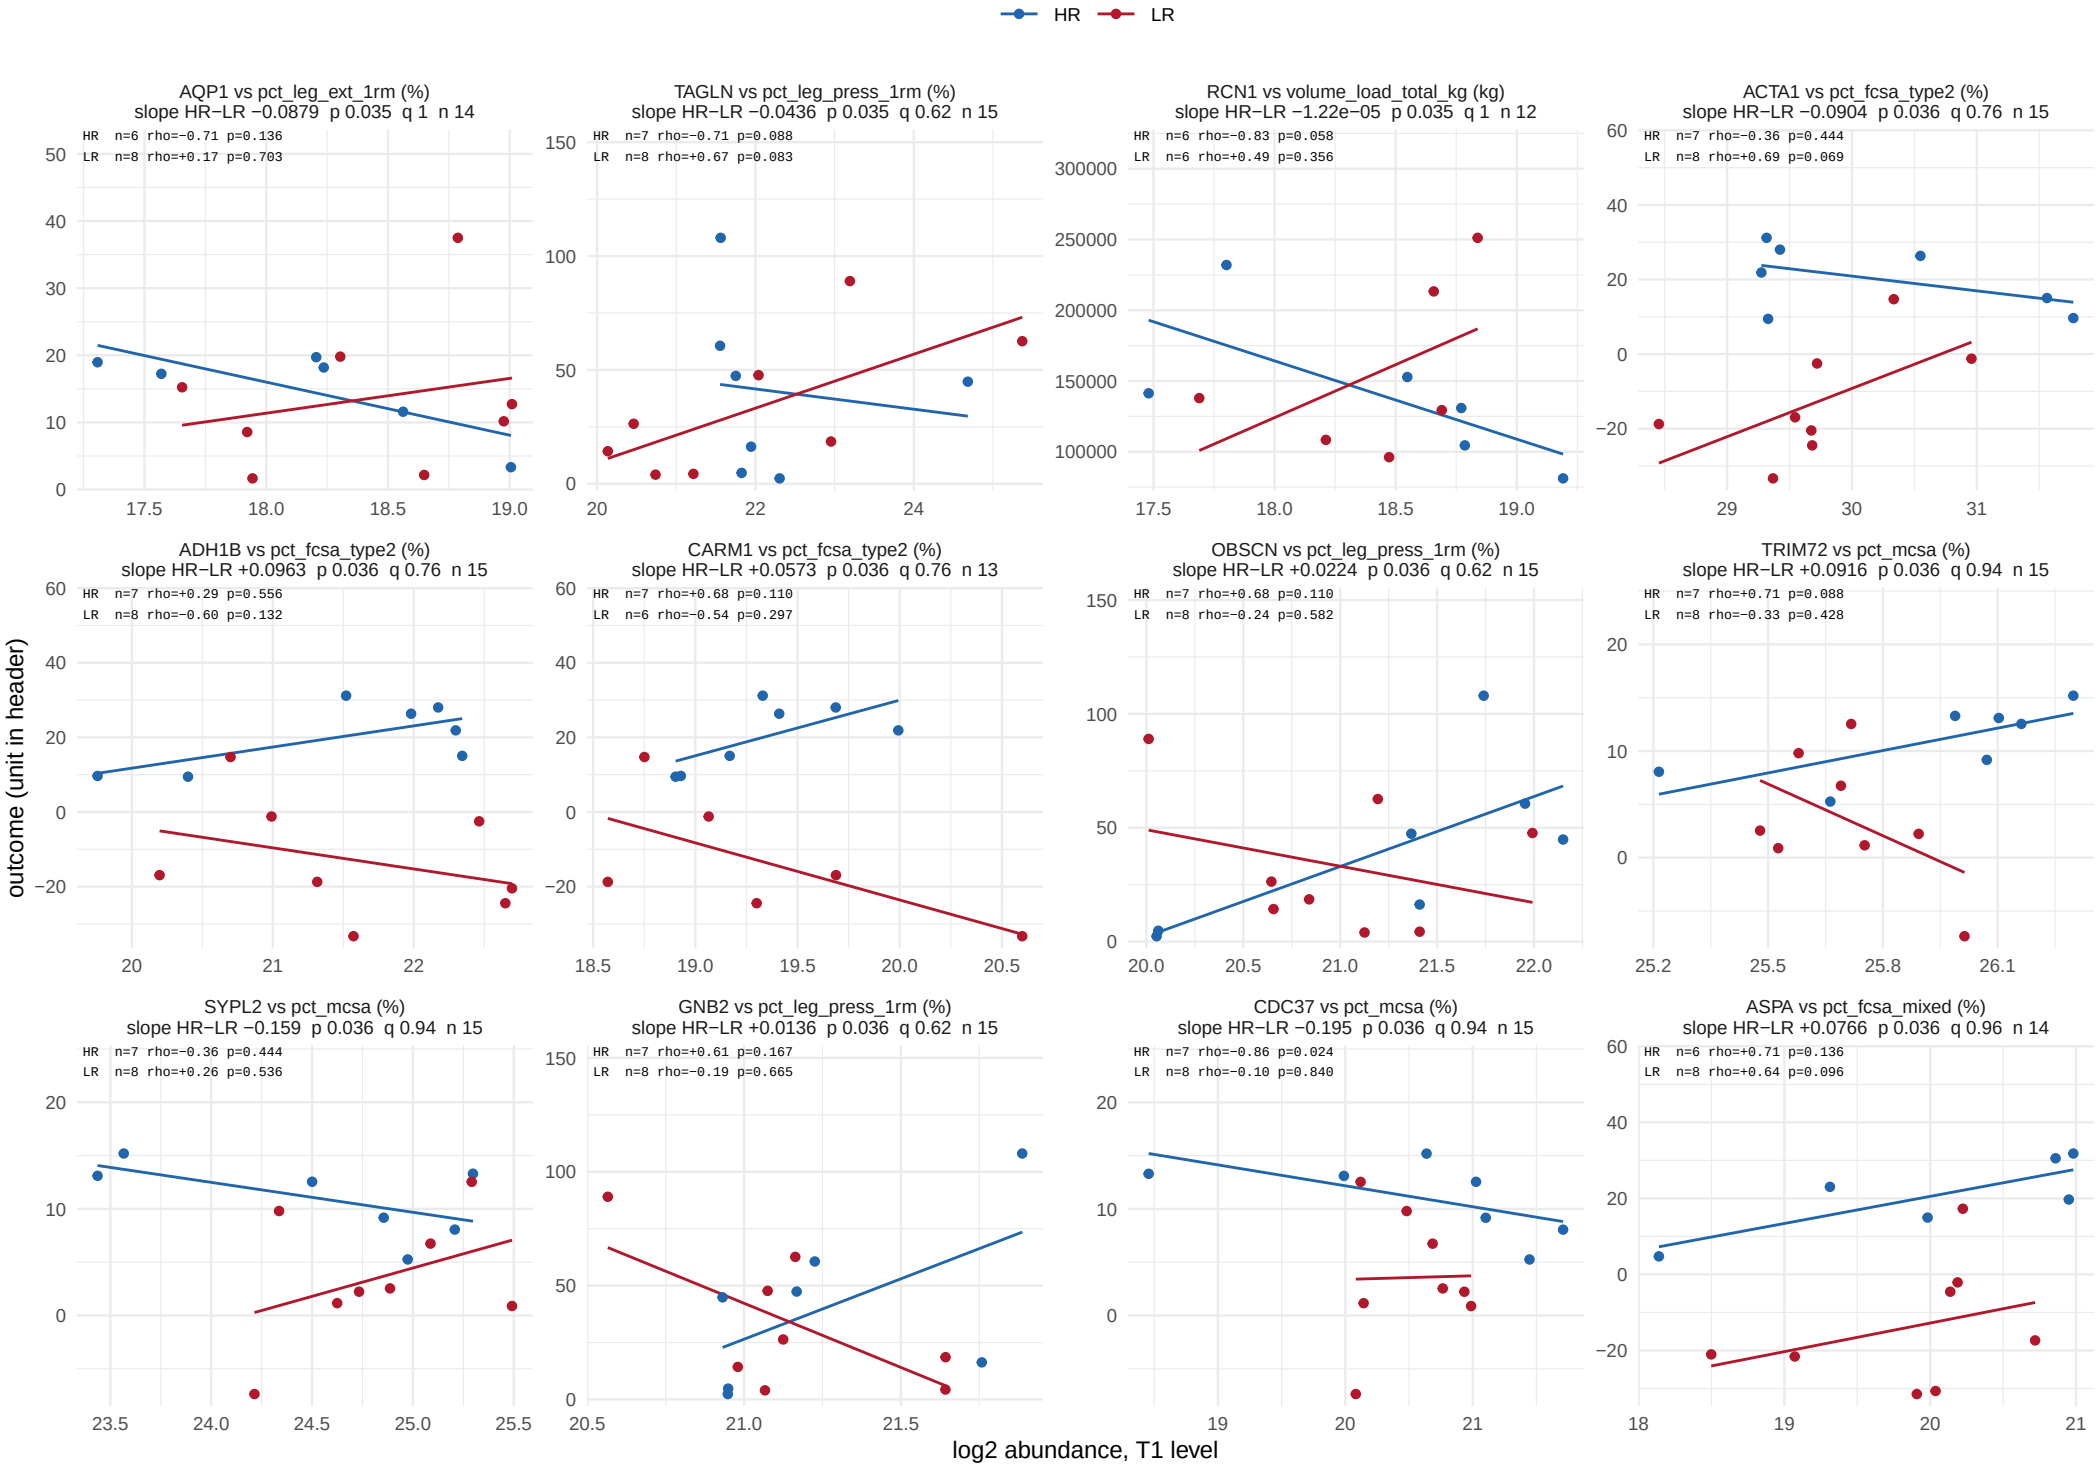

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


451 of 10266 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 29 of 38.

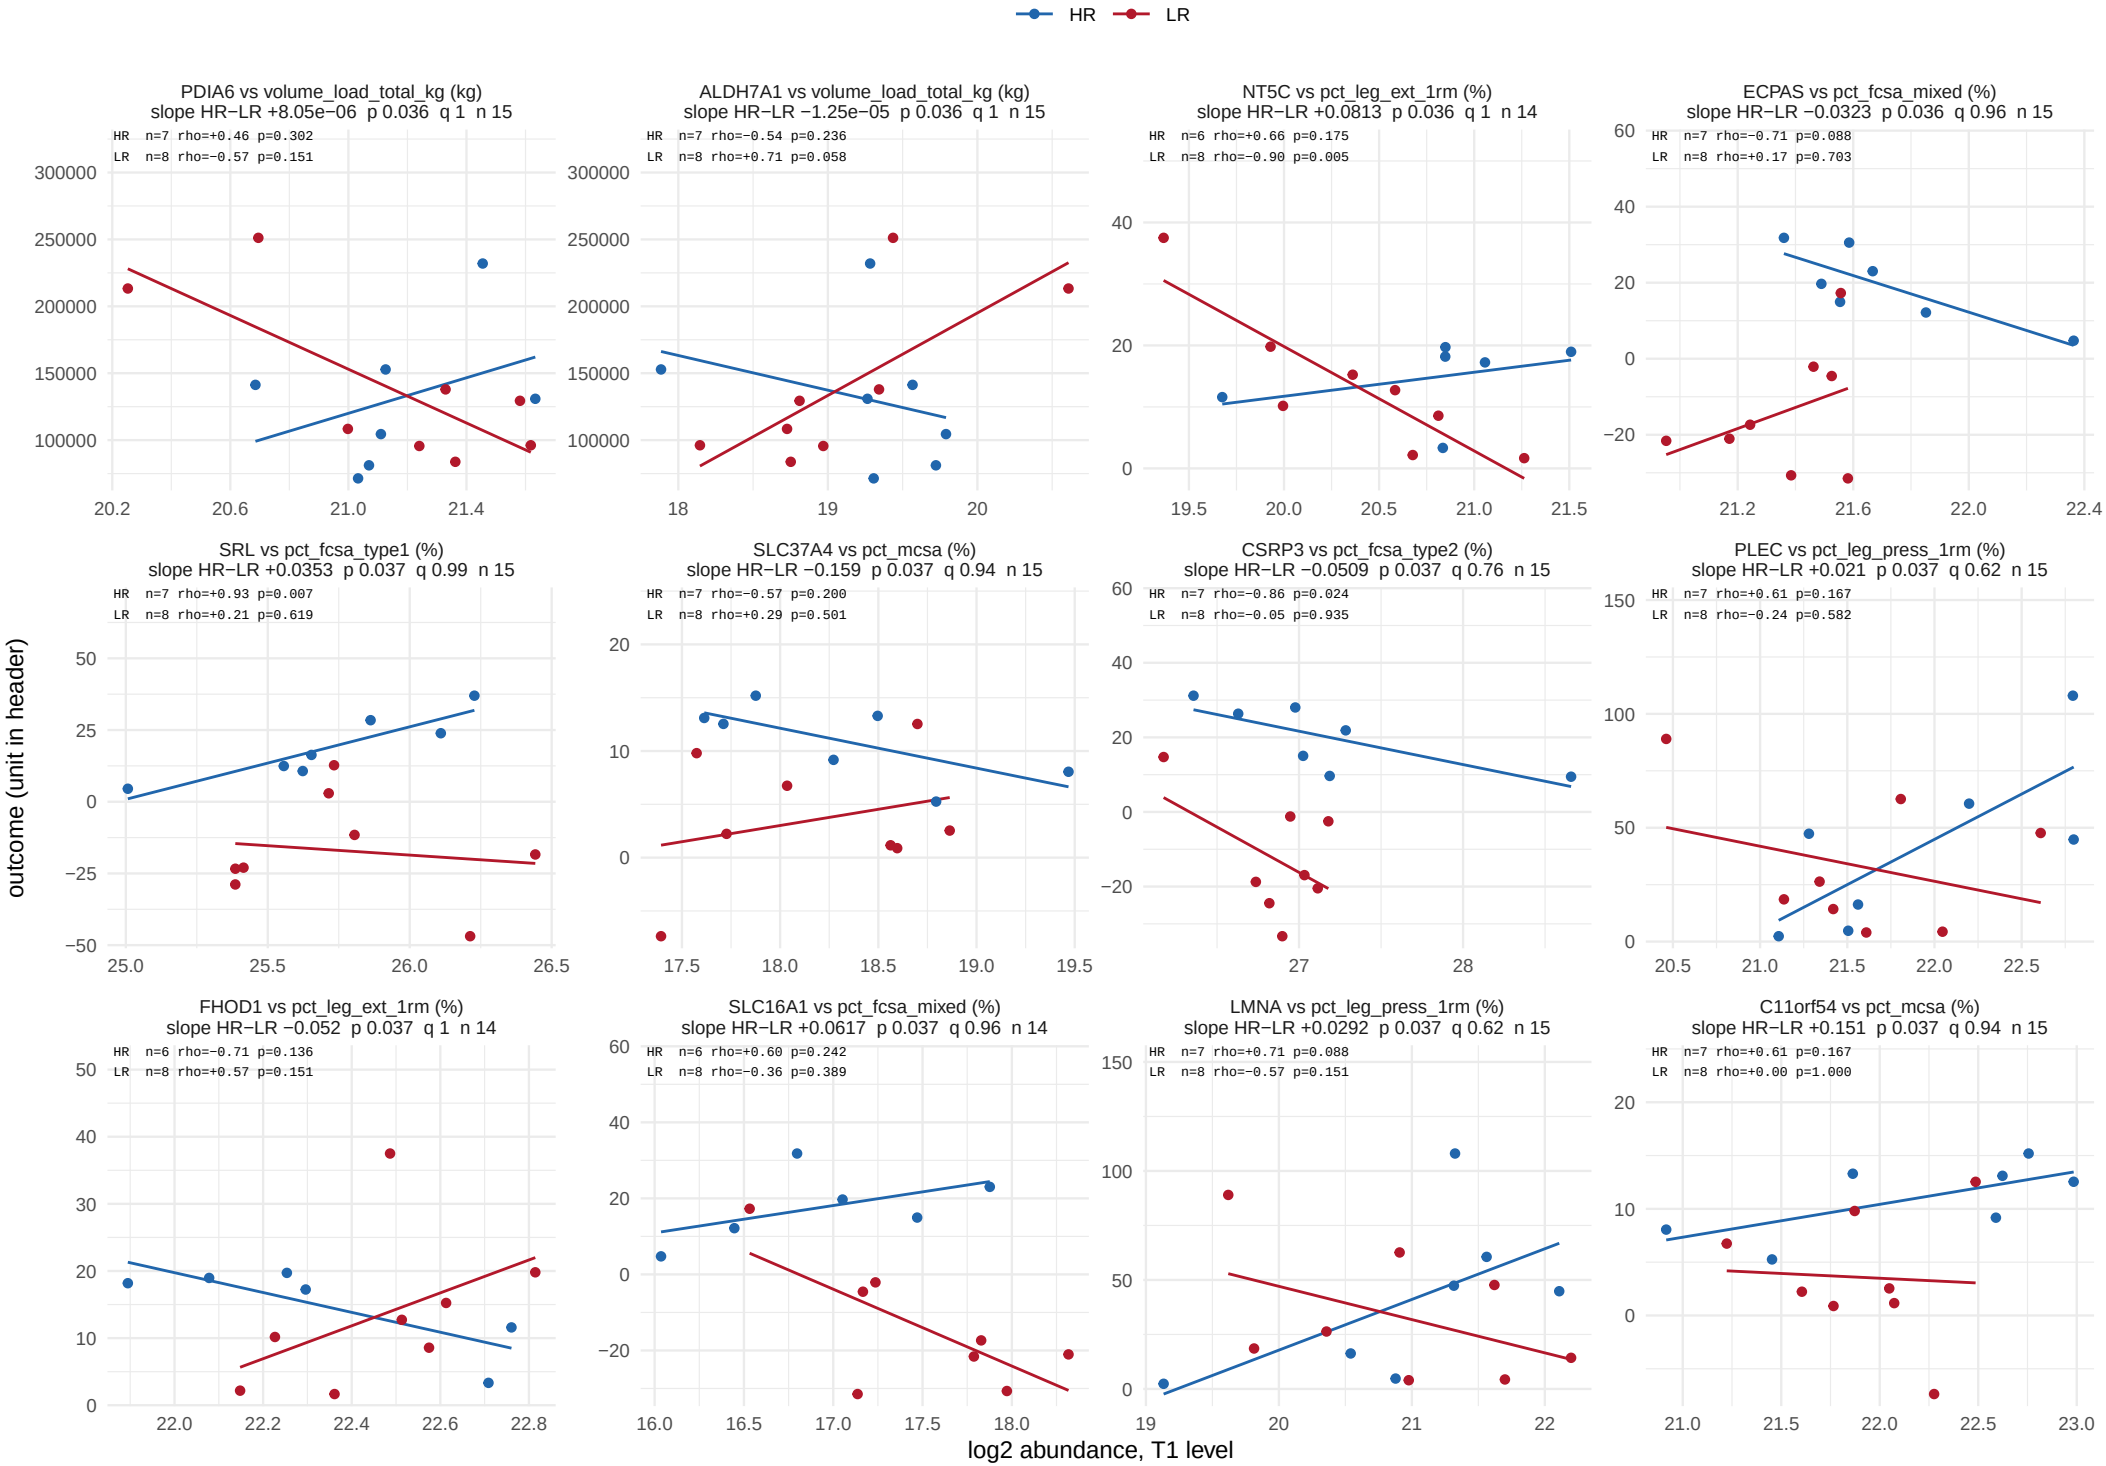

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


451 of 10266 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 30 of 38.

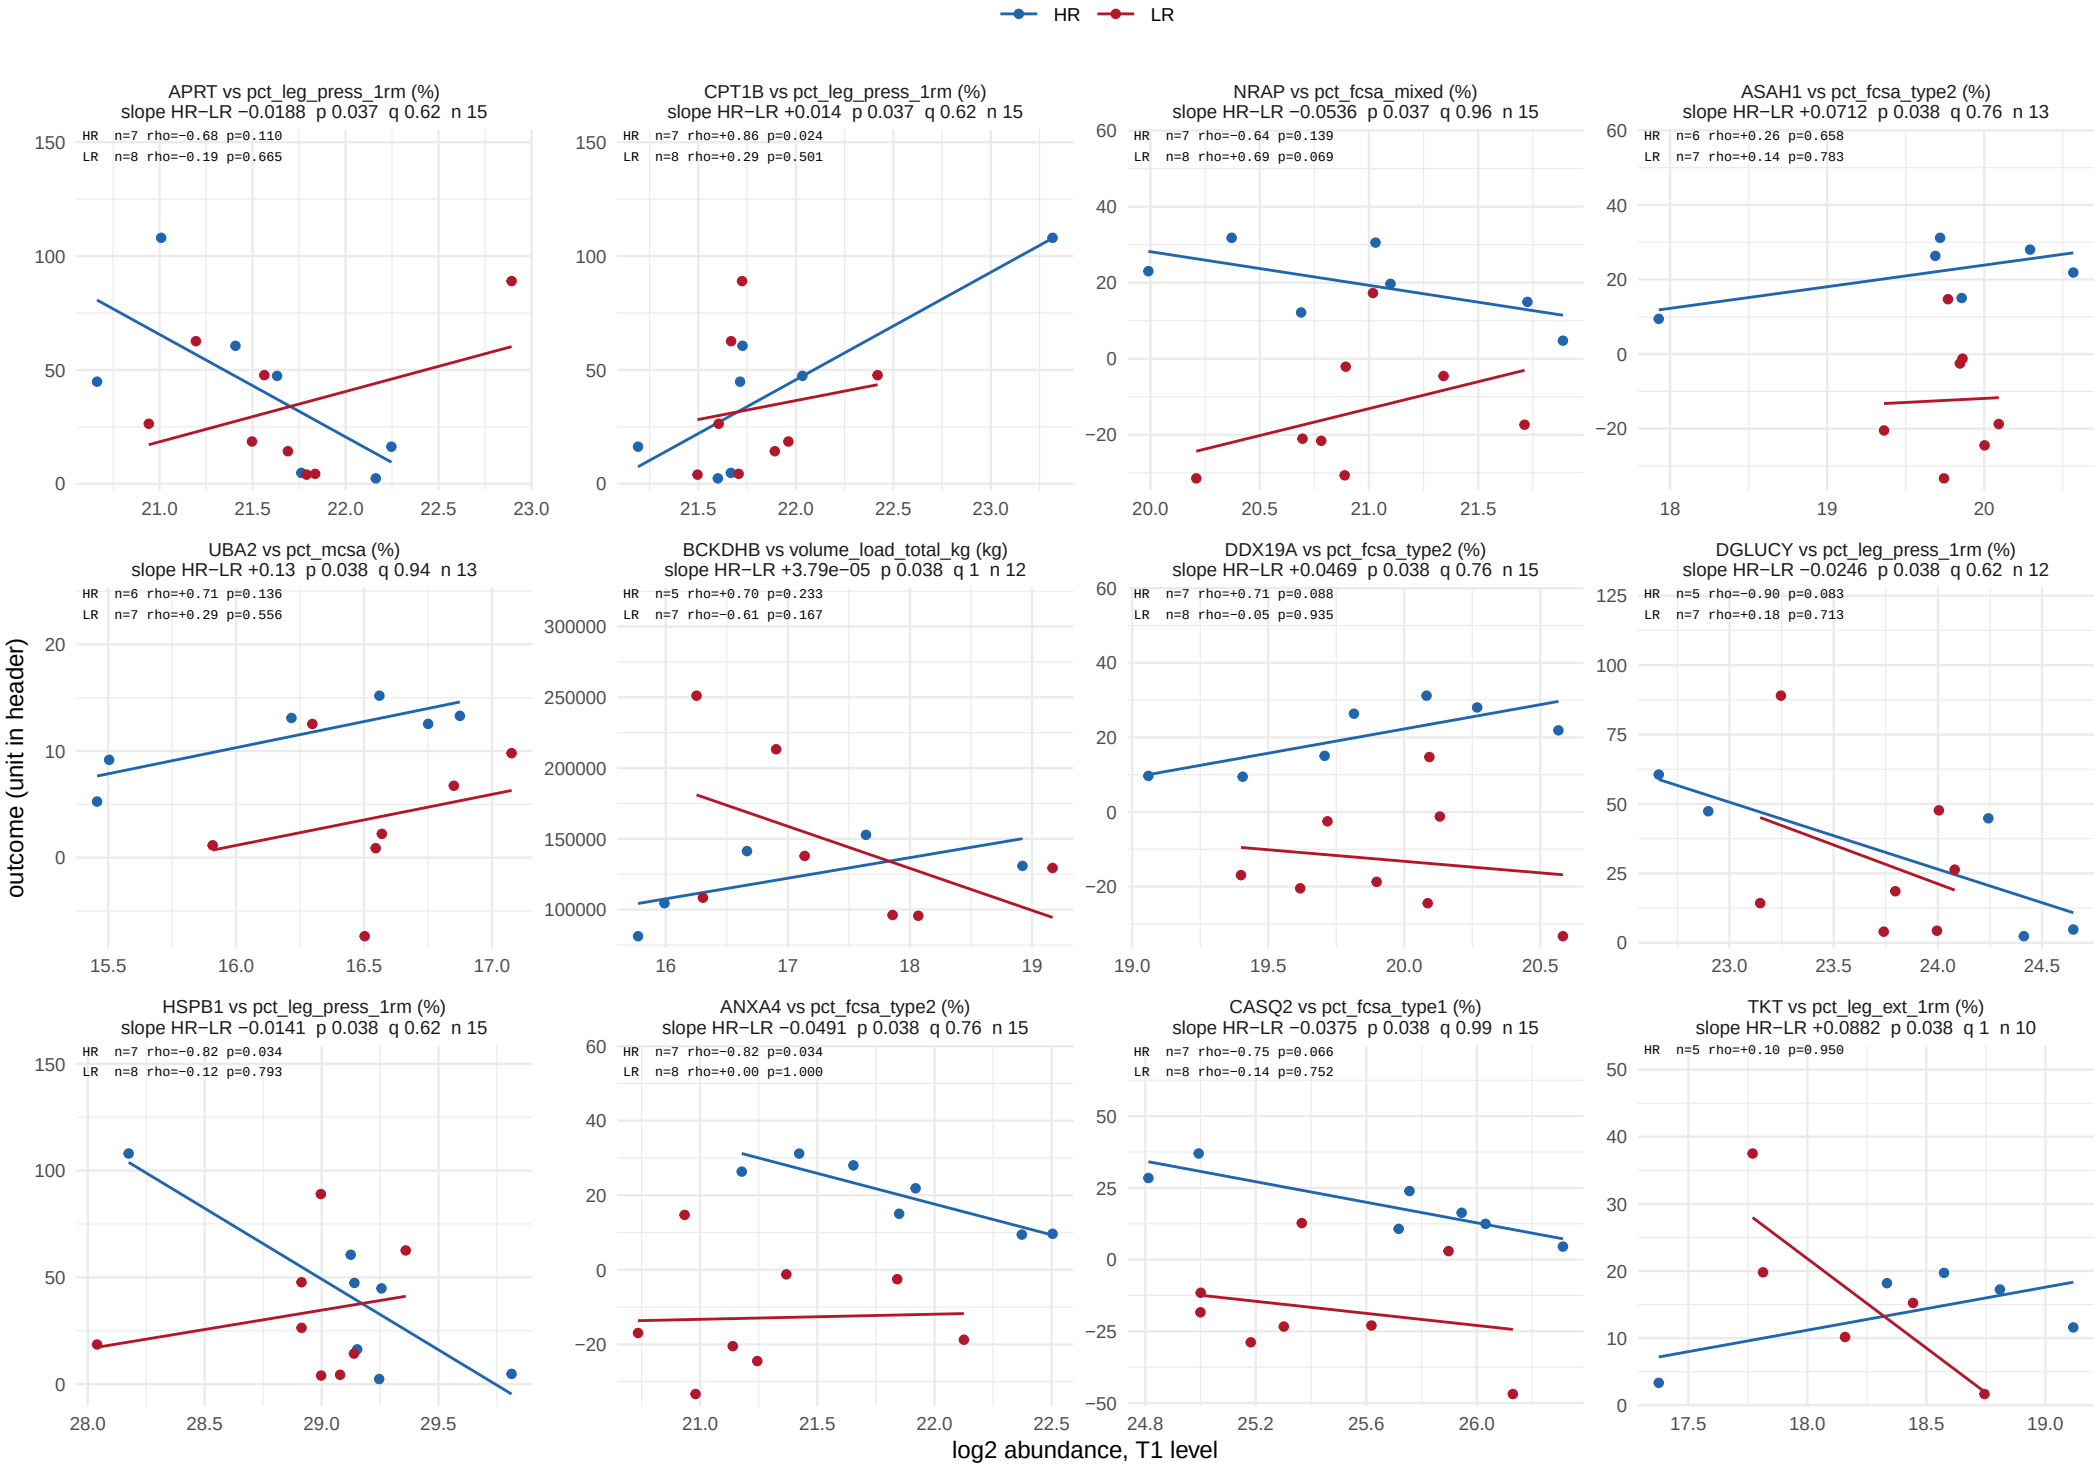

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


451 of 10266 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 31 of 38.

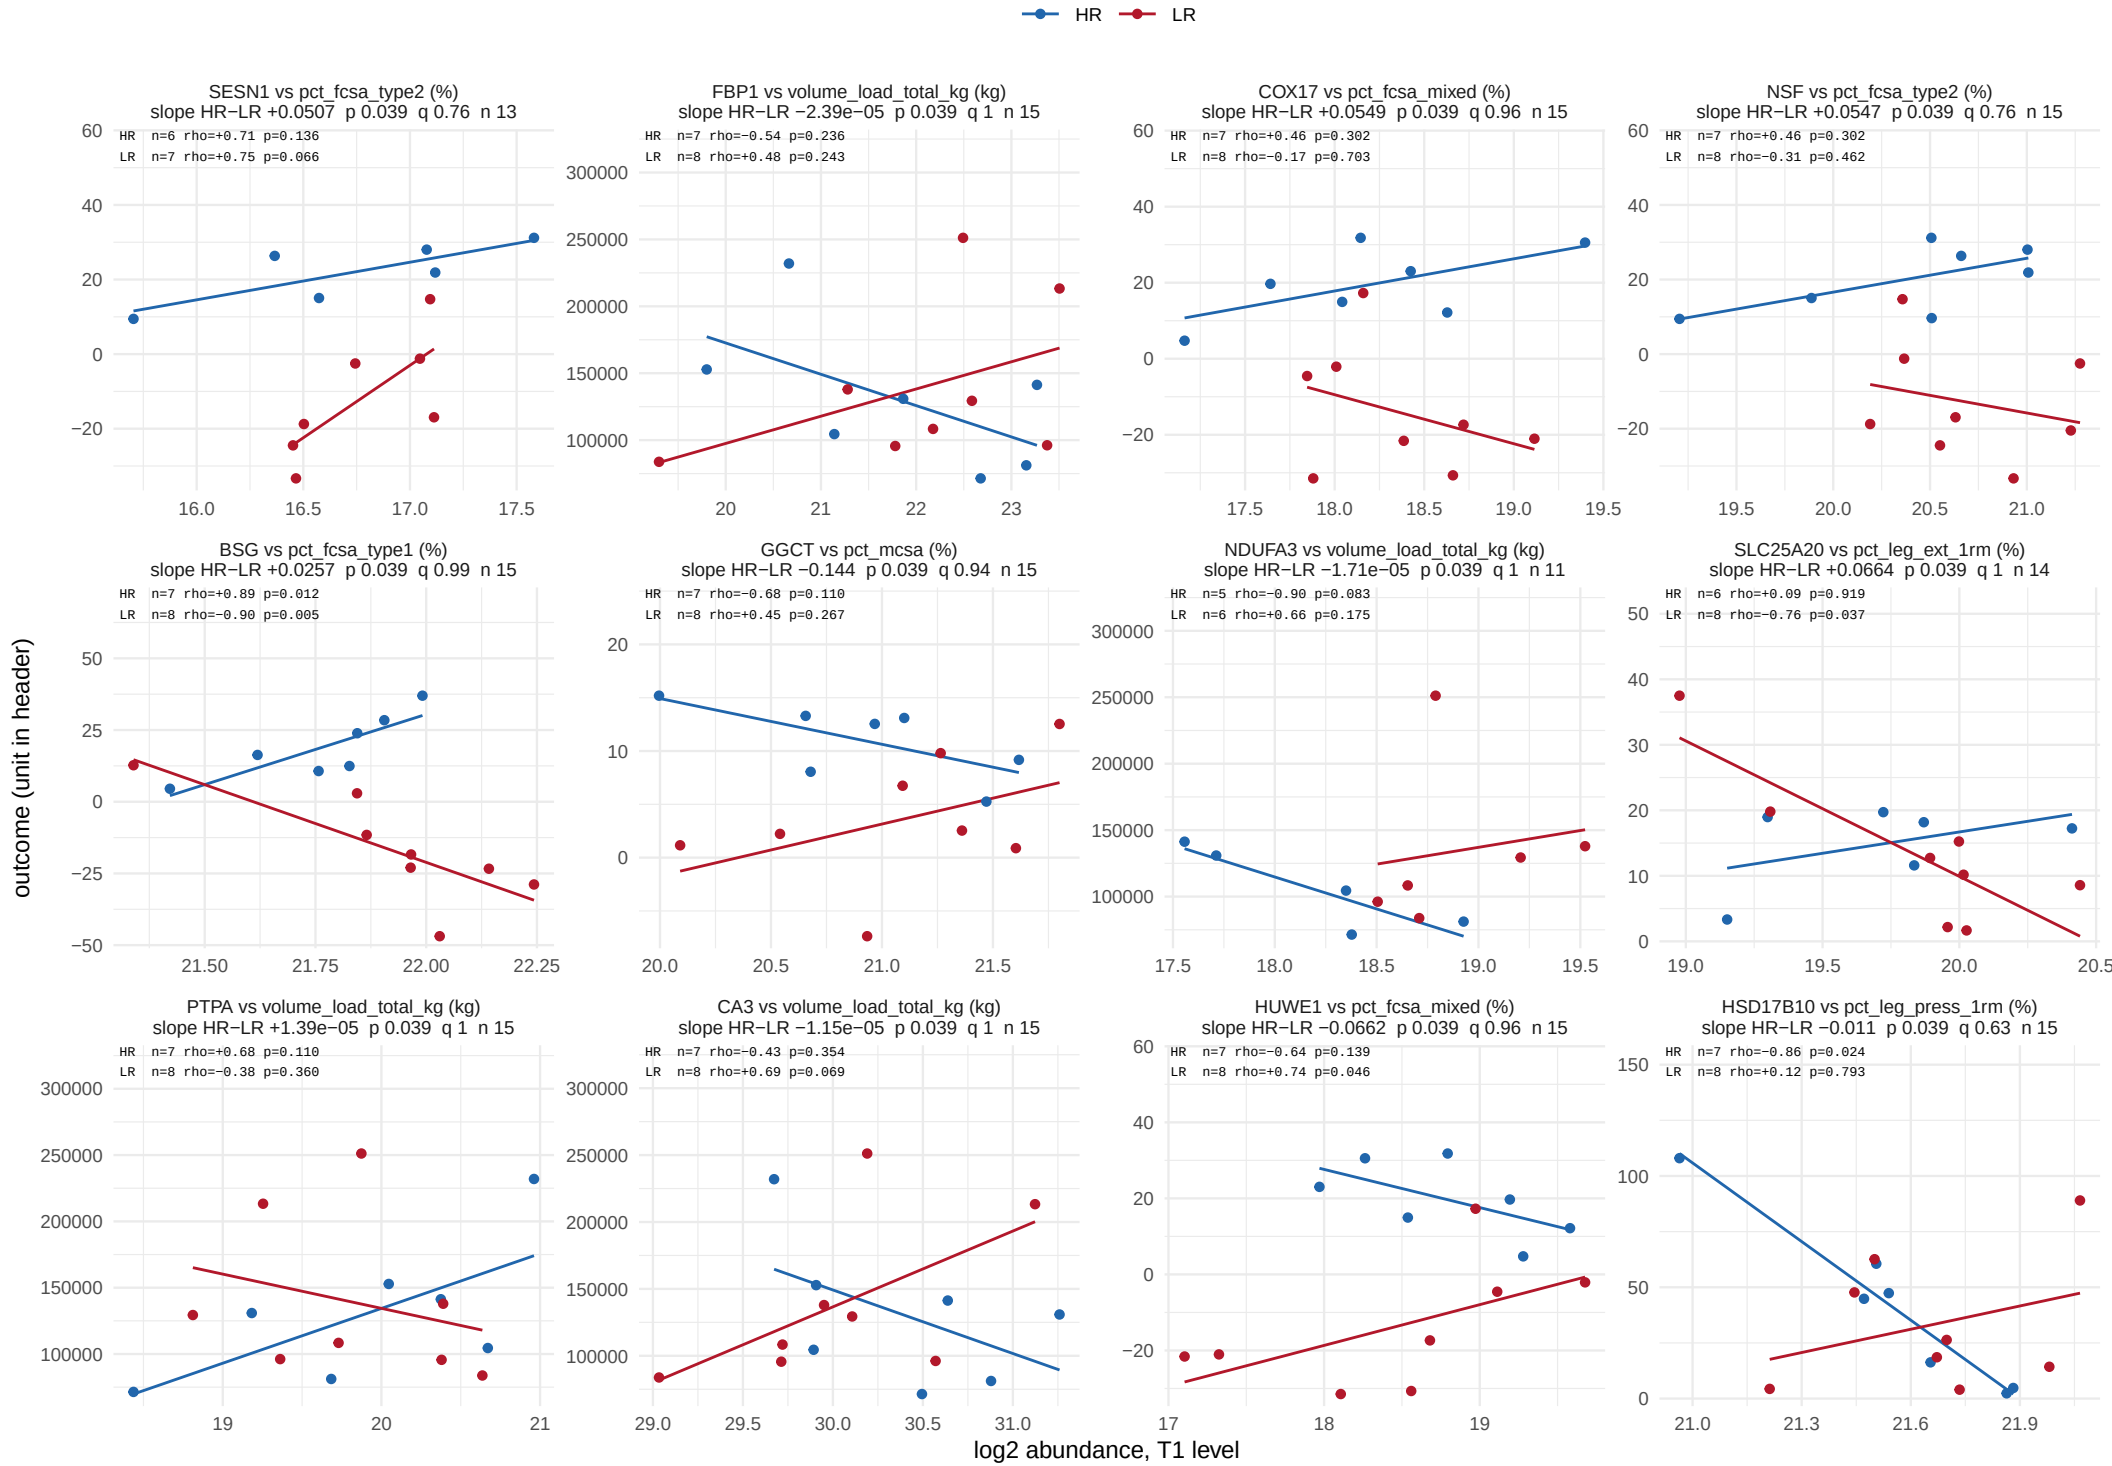

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


451 of 10266 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 32 of 38.

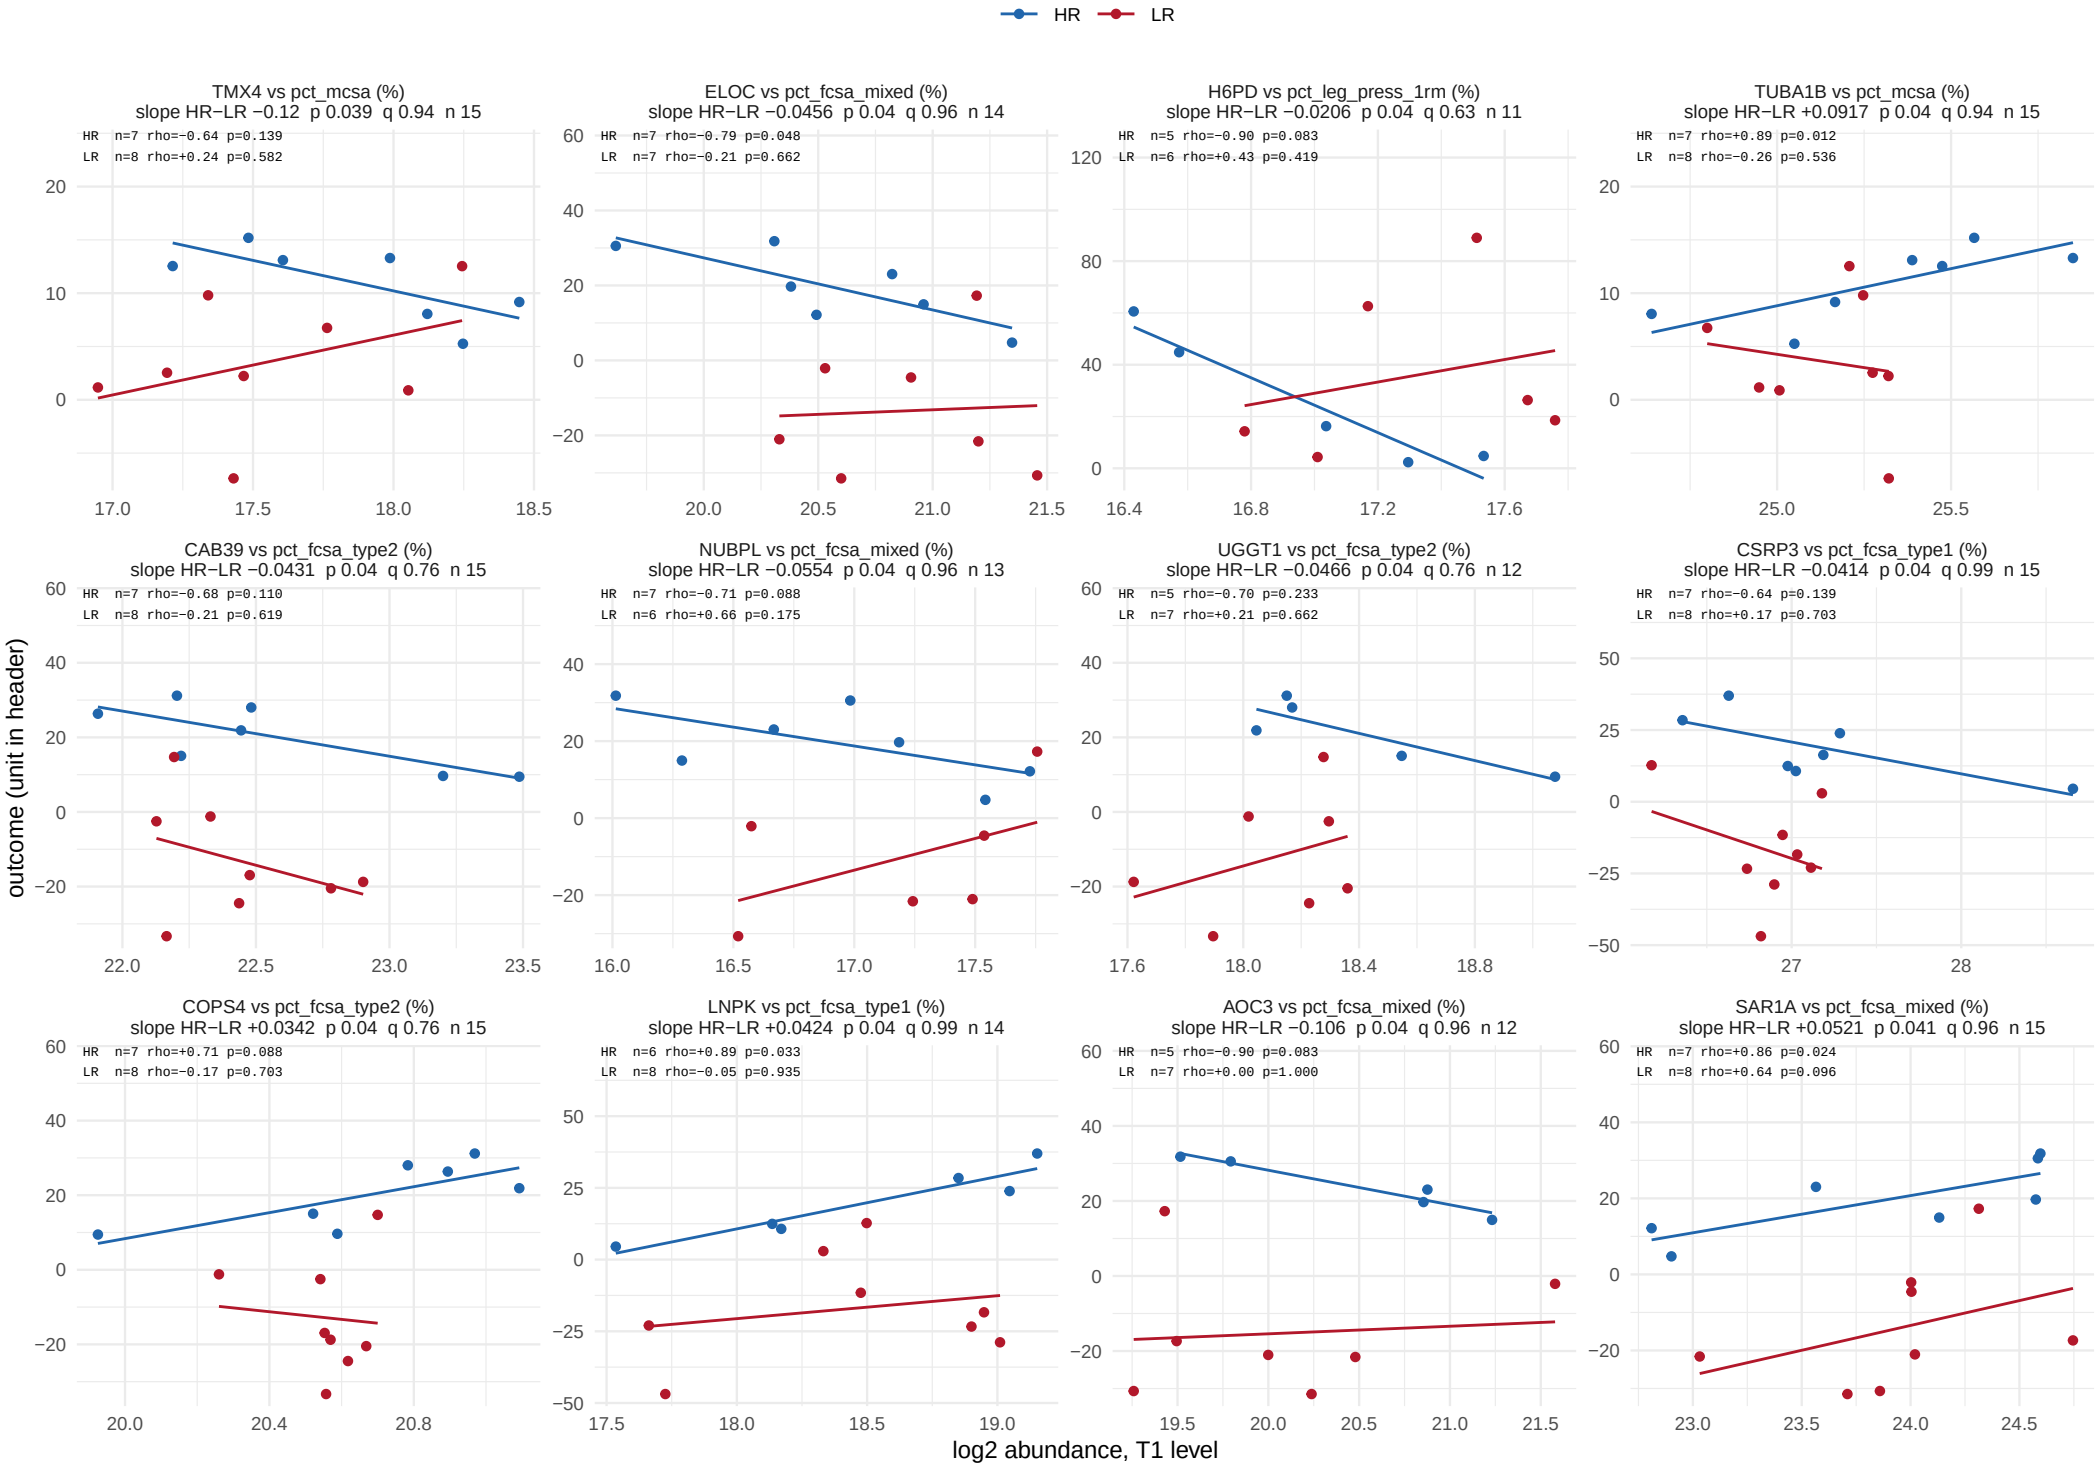

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


451 of 10266 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 33 of 38.

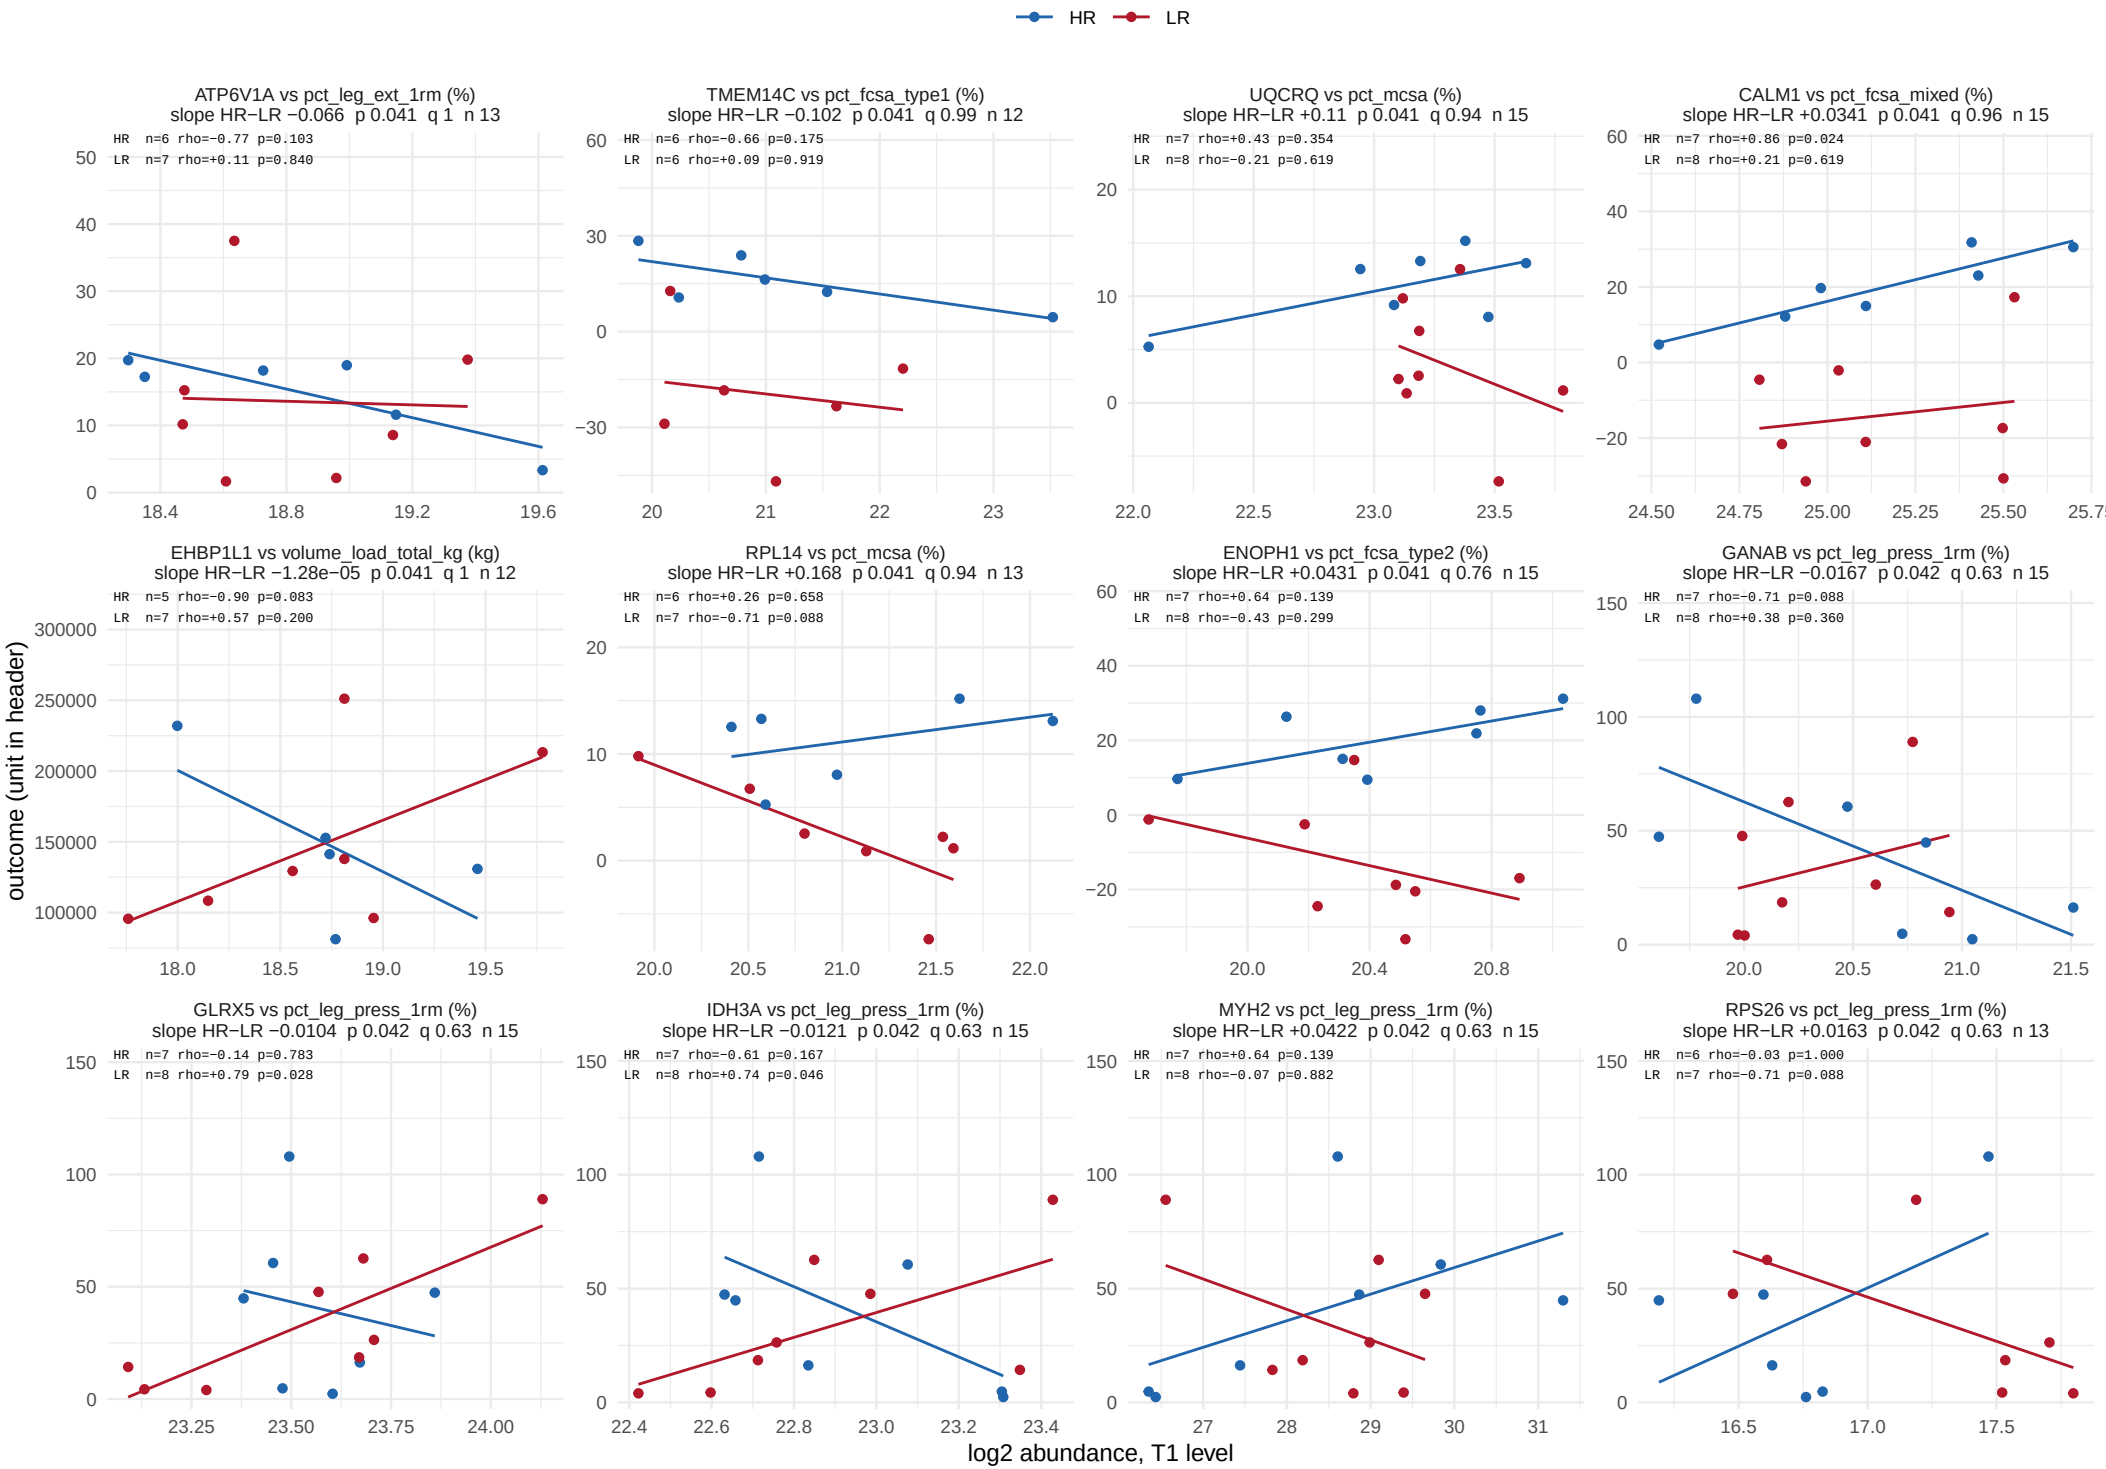

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


451 of 10266 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 34 of 38.

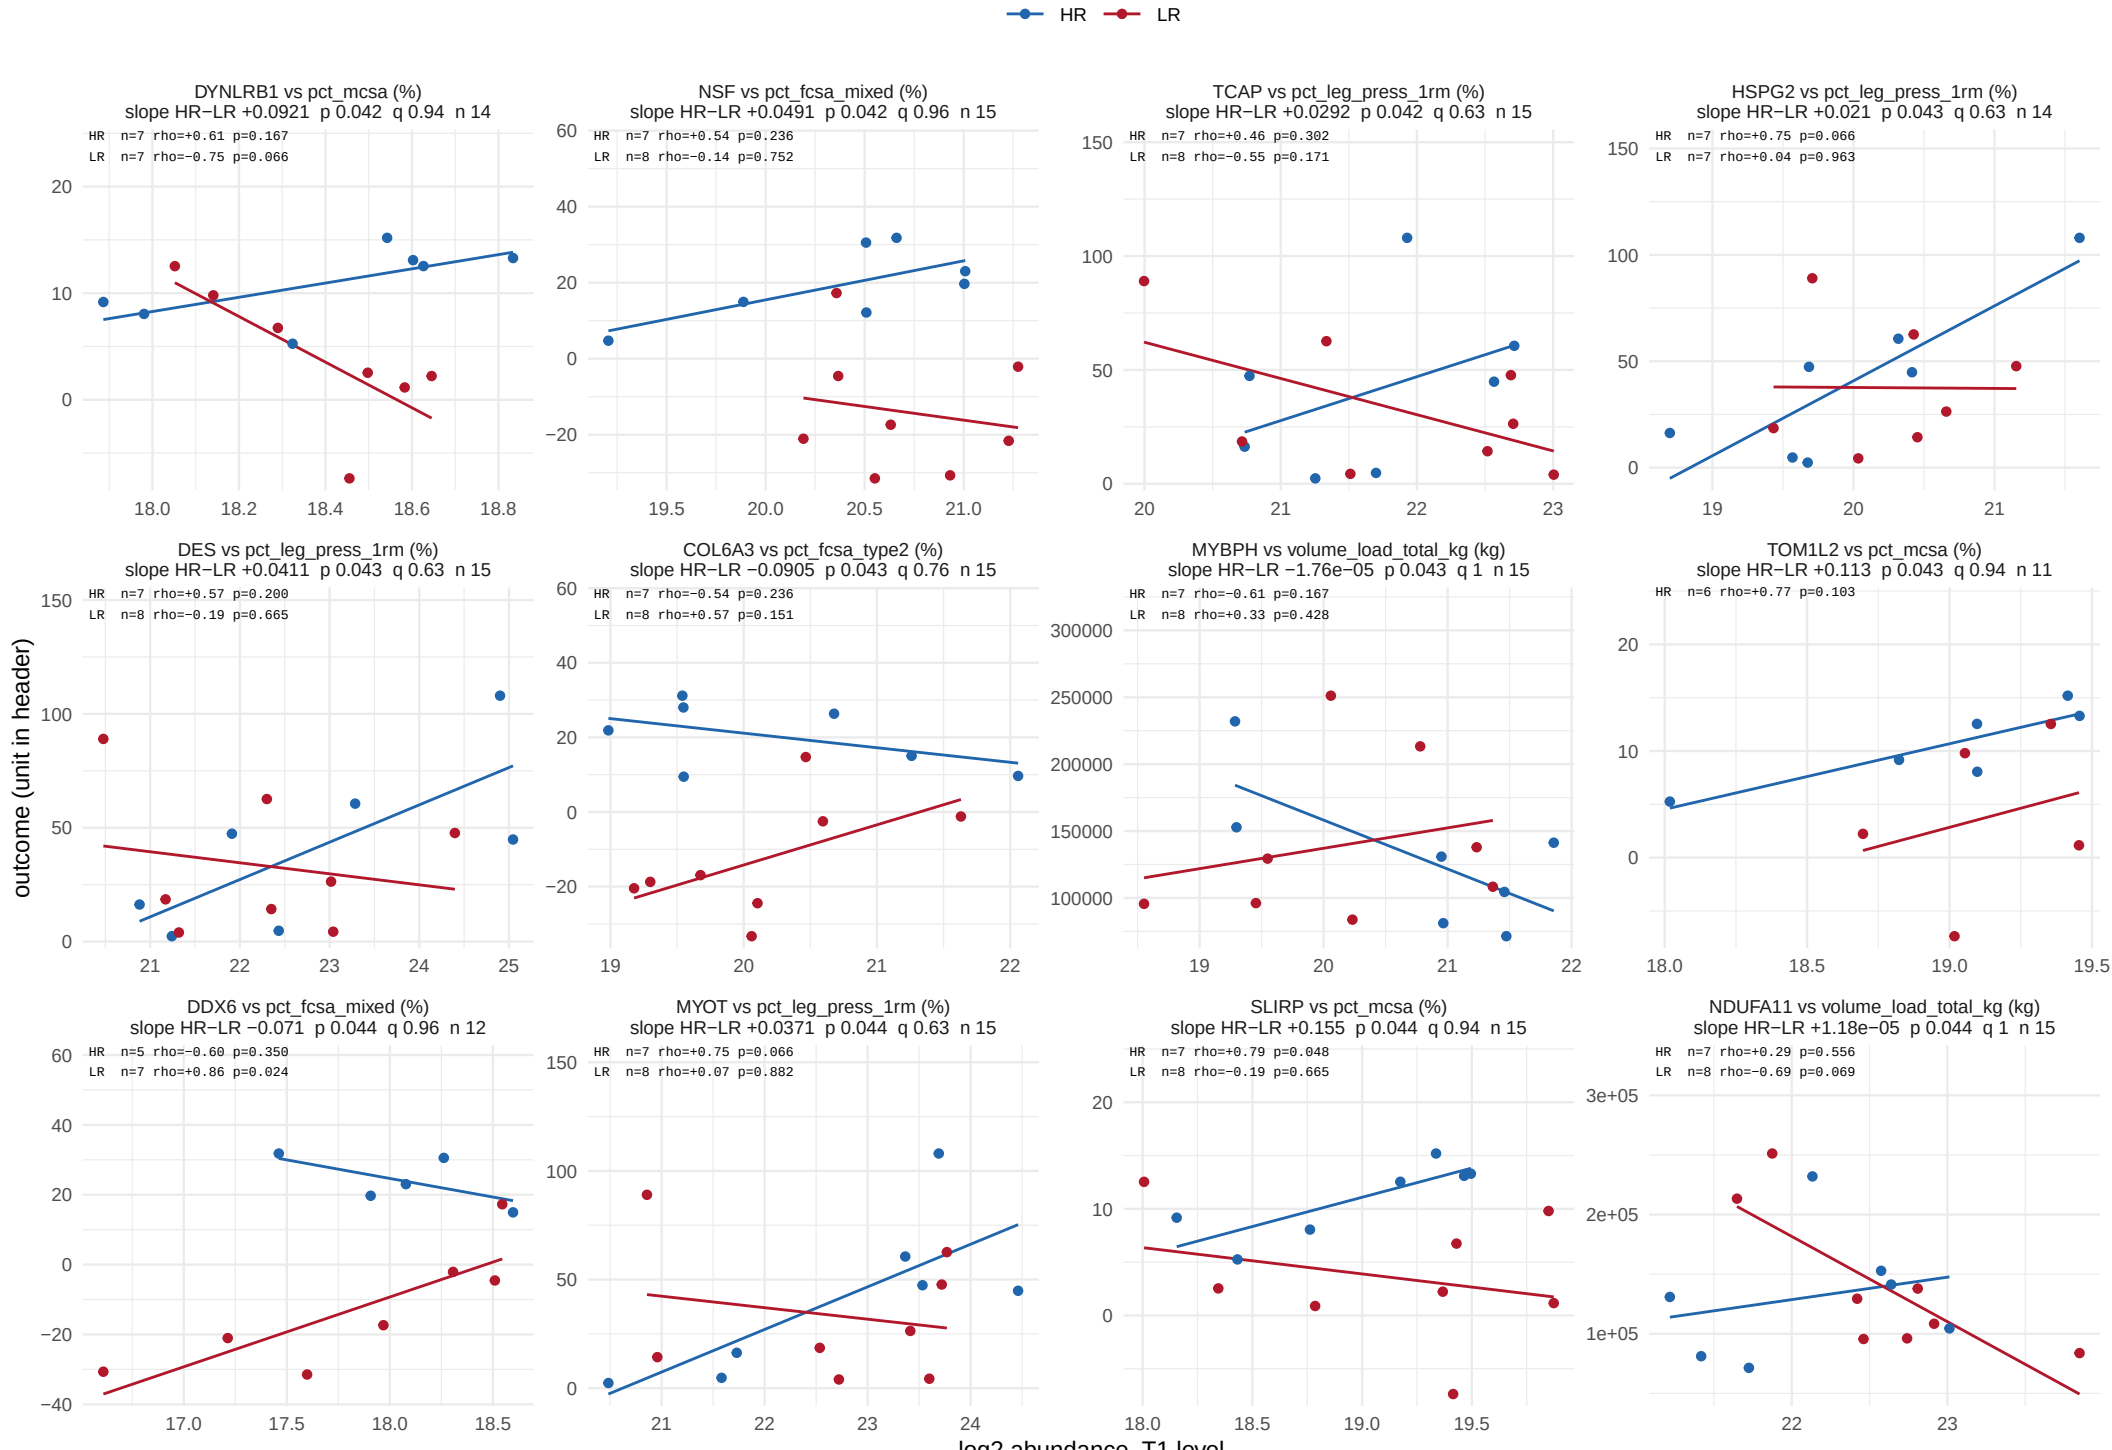

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


451 of 10266 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 35 of 38.

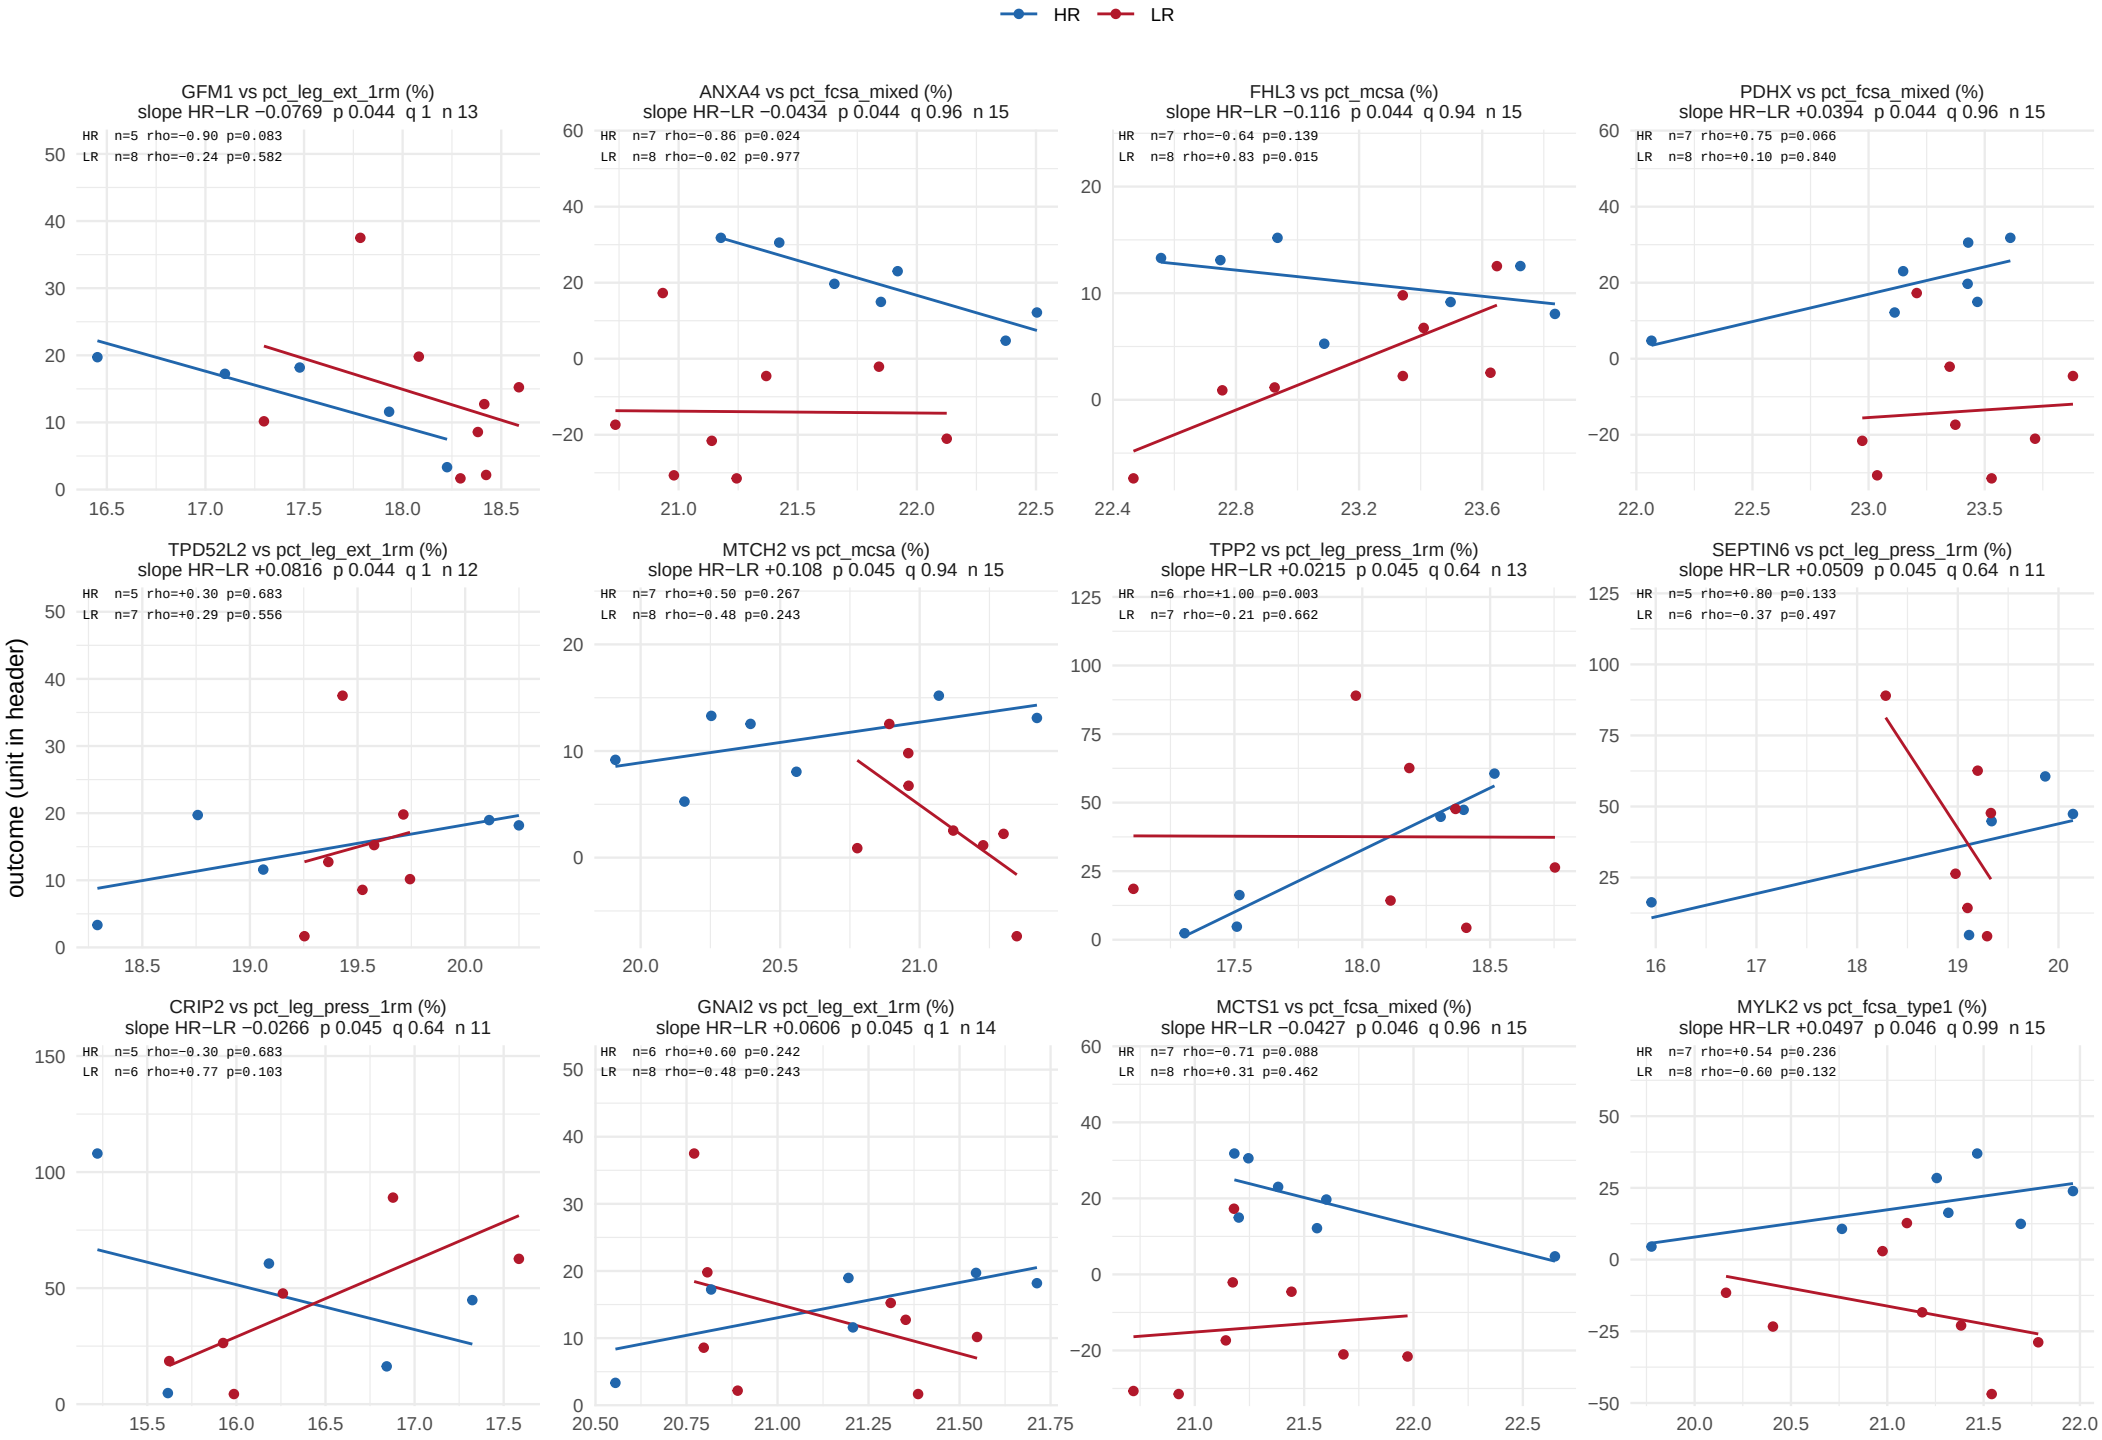

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


451 of 10266 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 36 of 38.

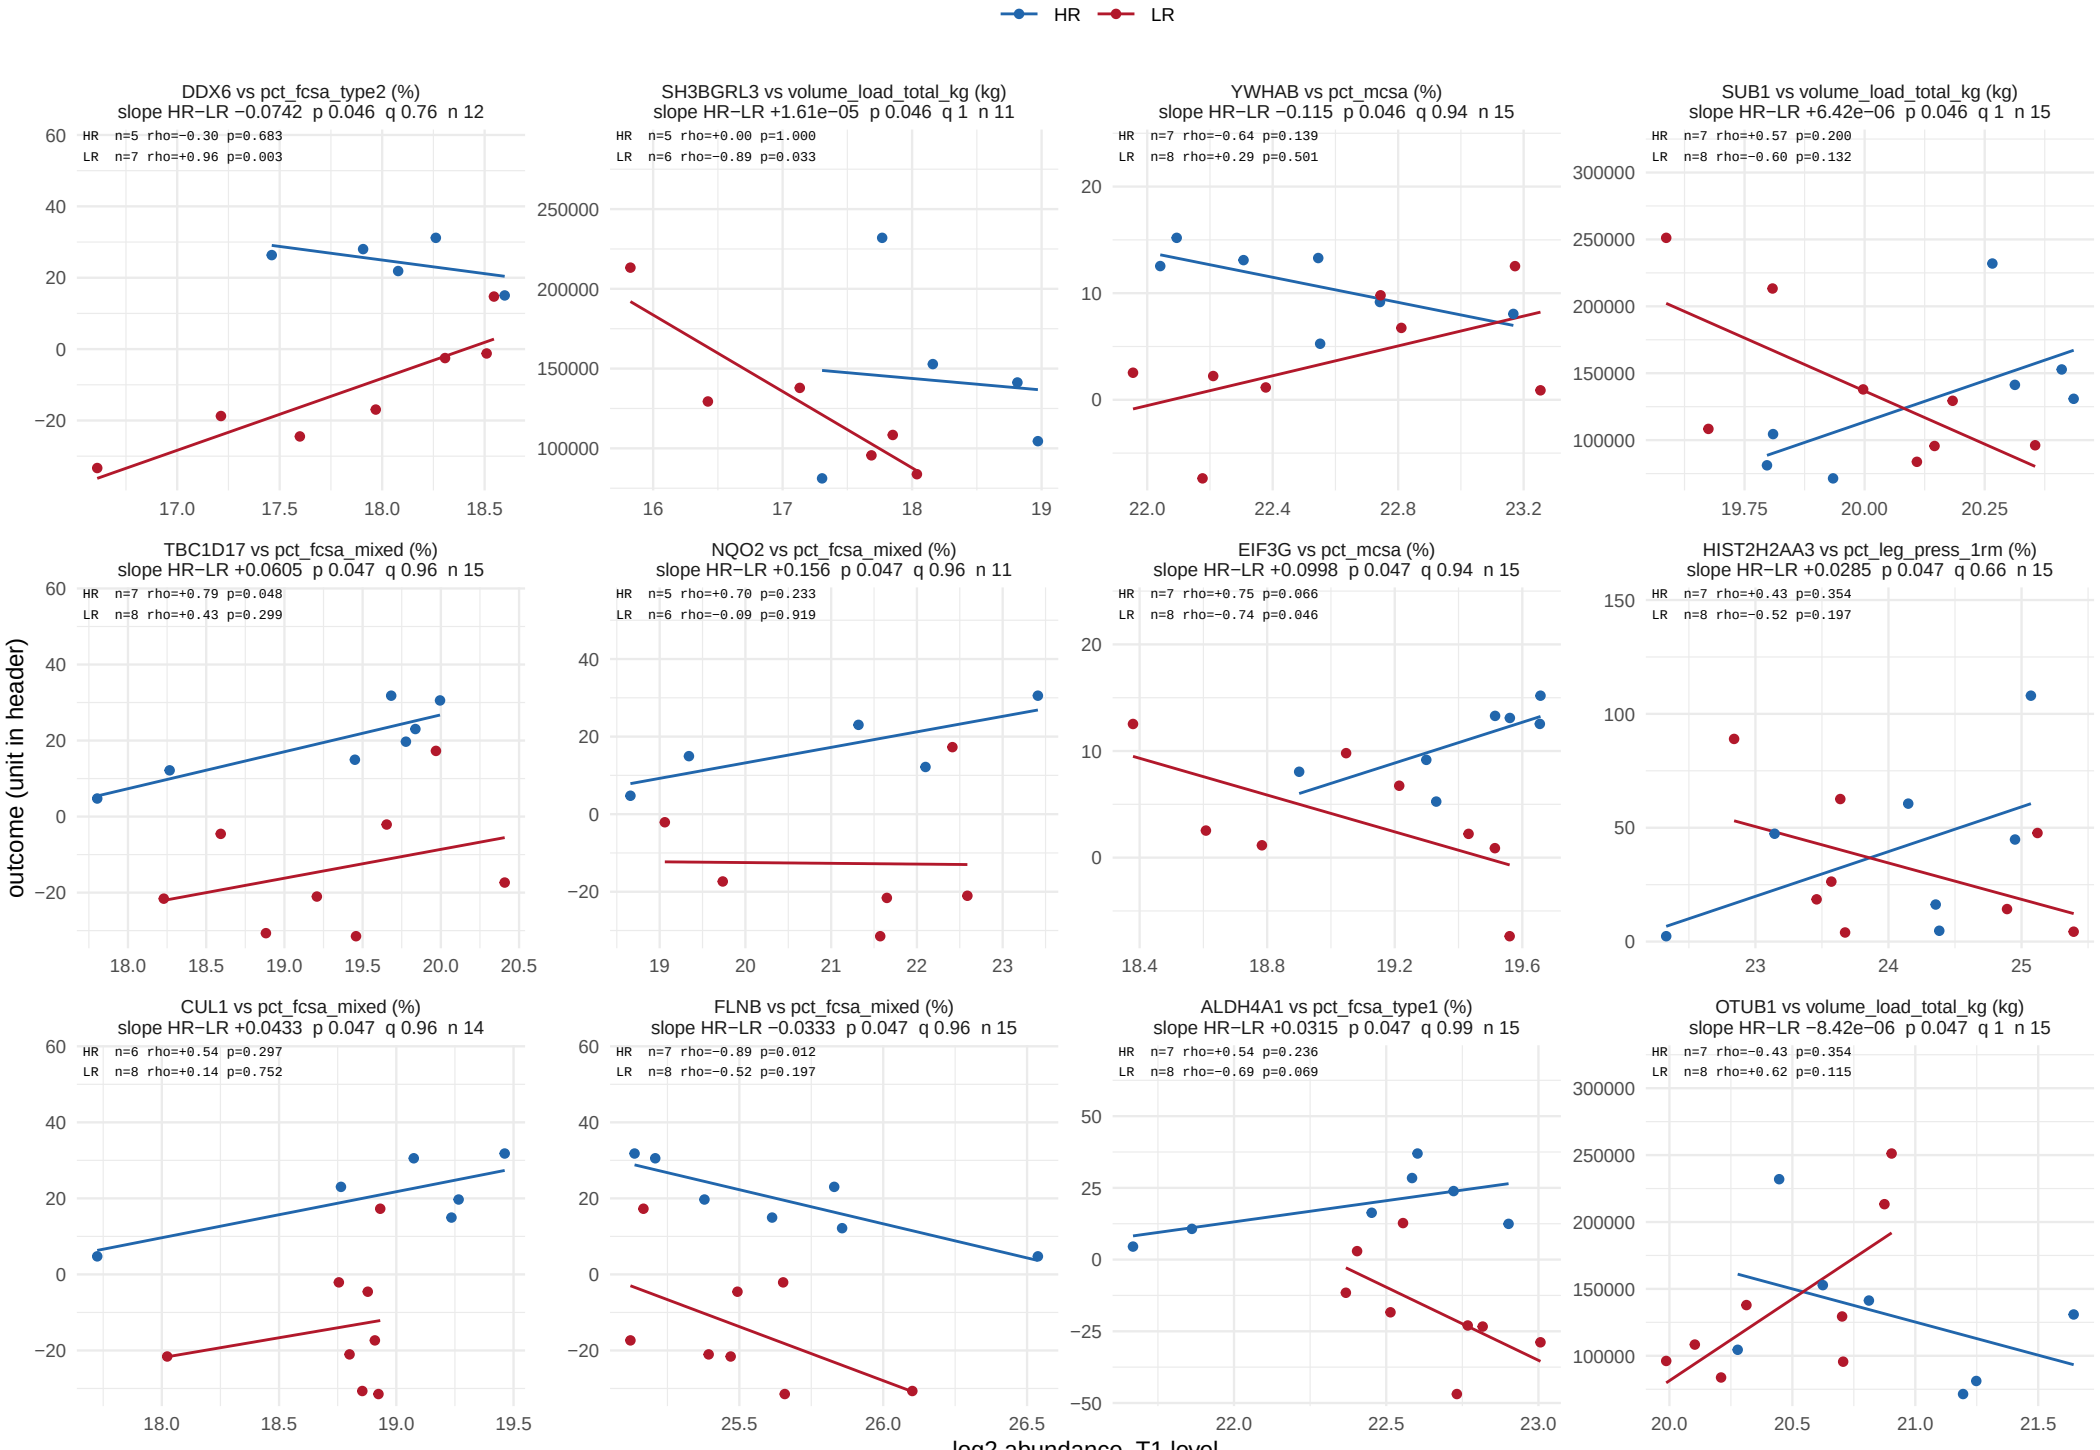

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


451 of 10266 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 37 of 38.

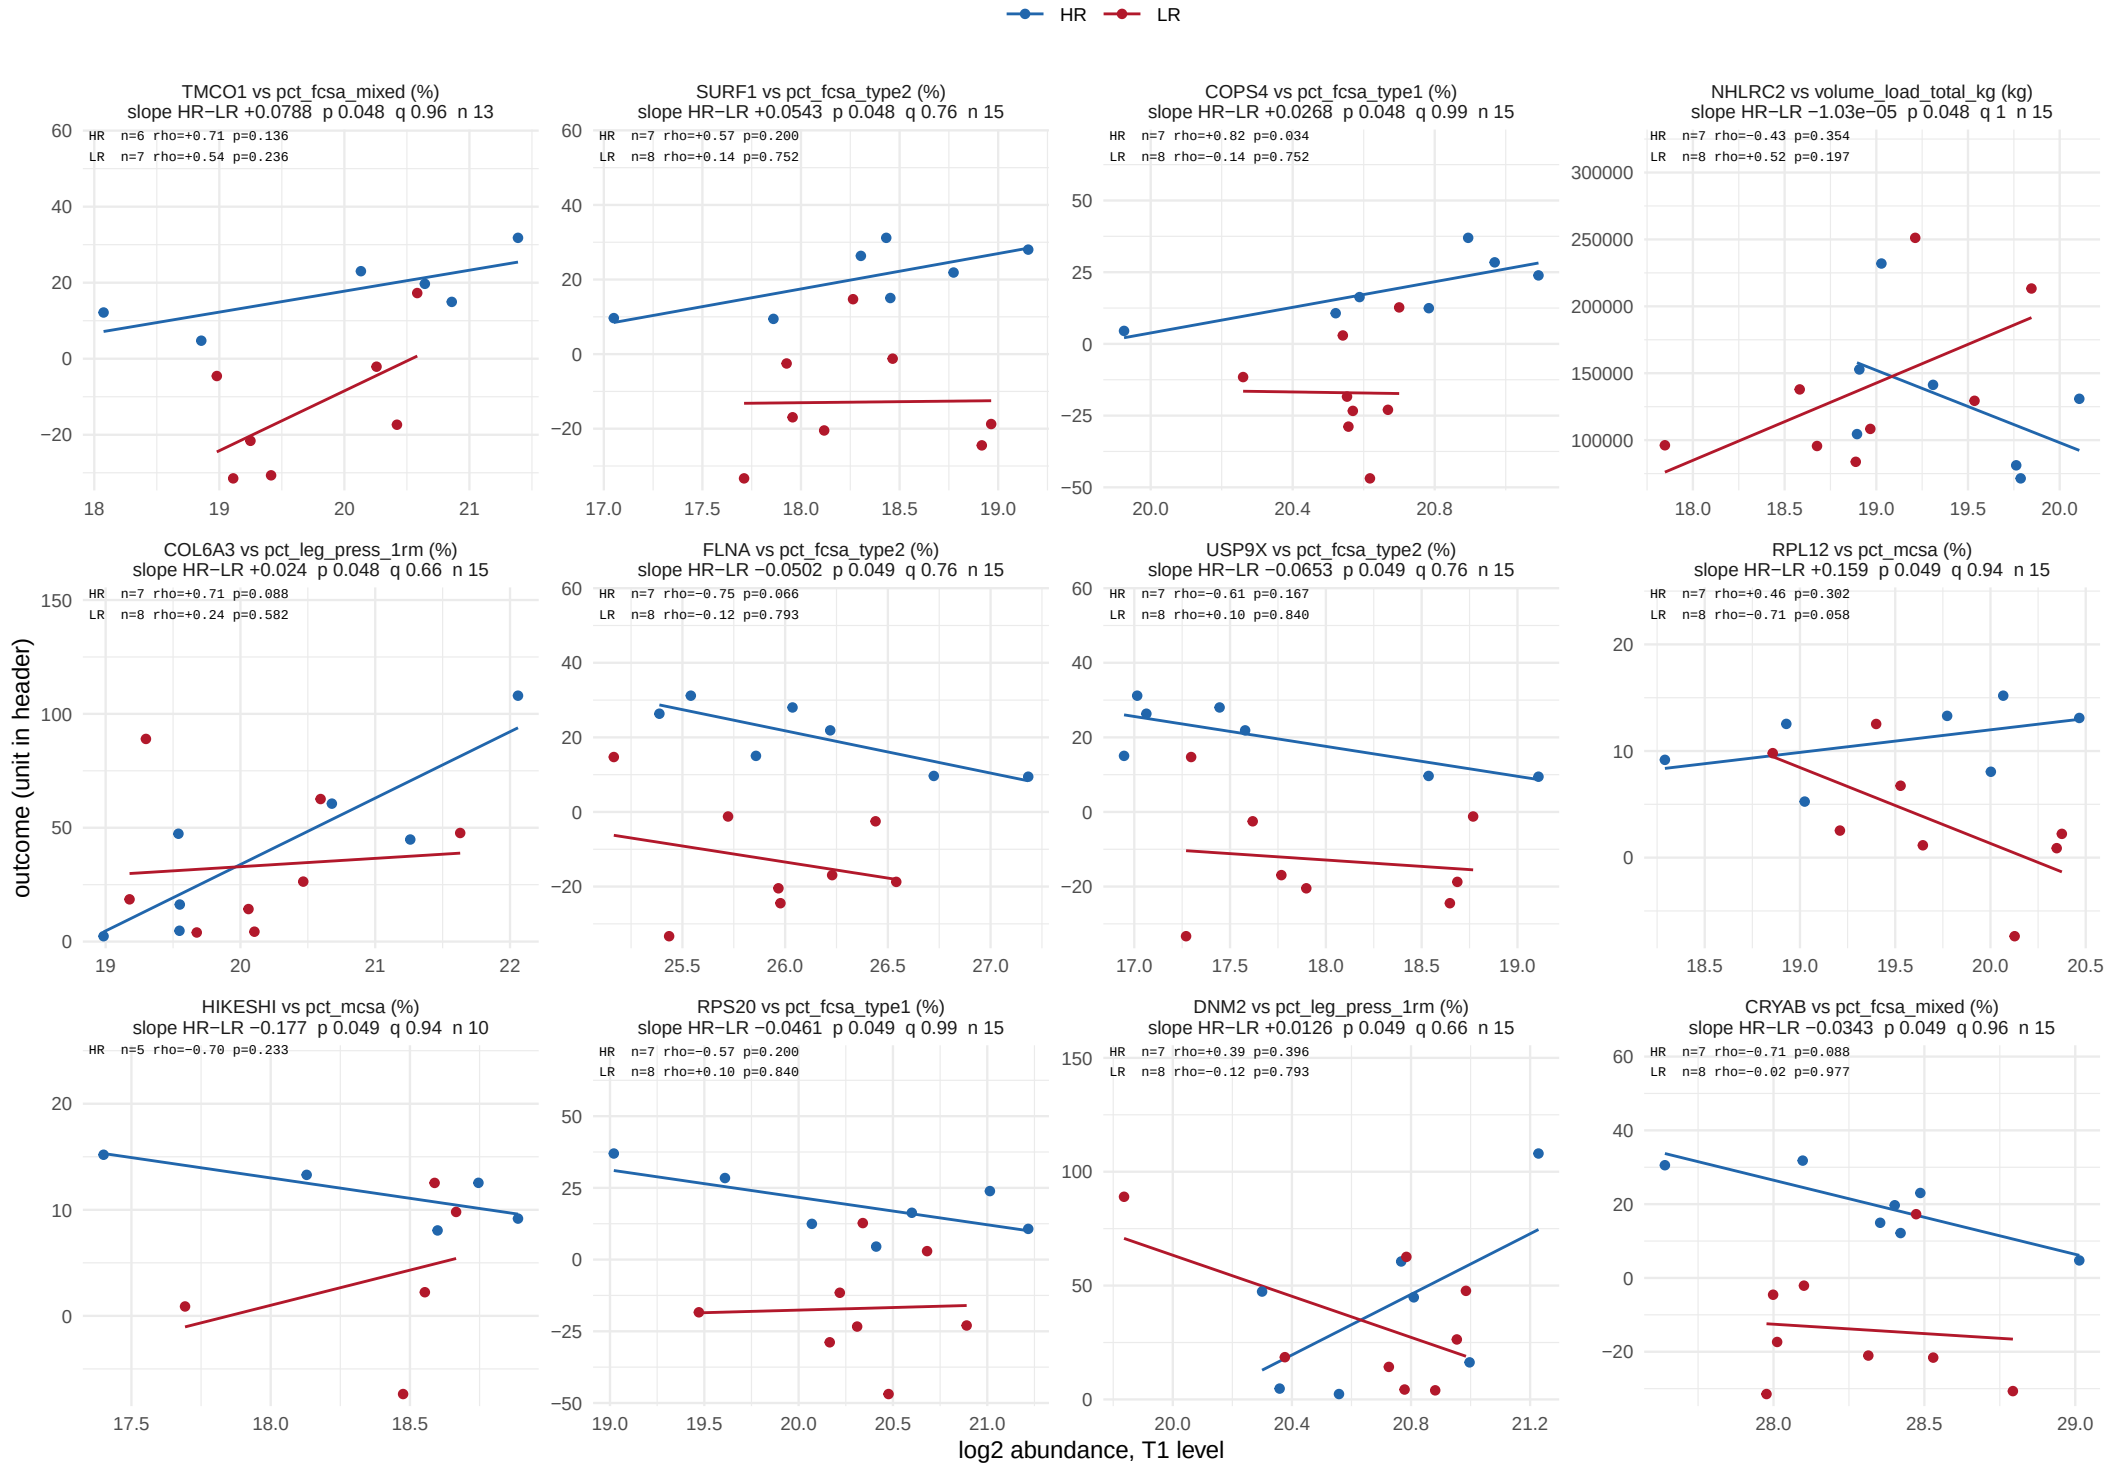

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, baseline window


451 of 10266 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 38 of 38.

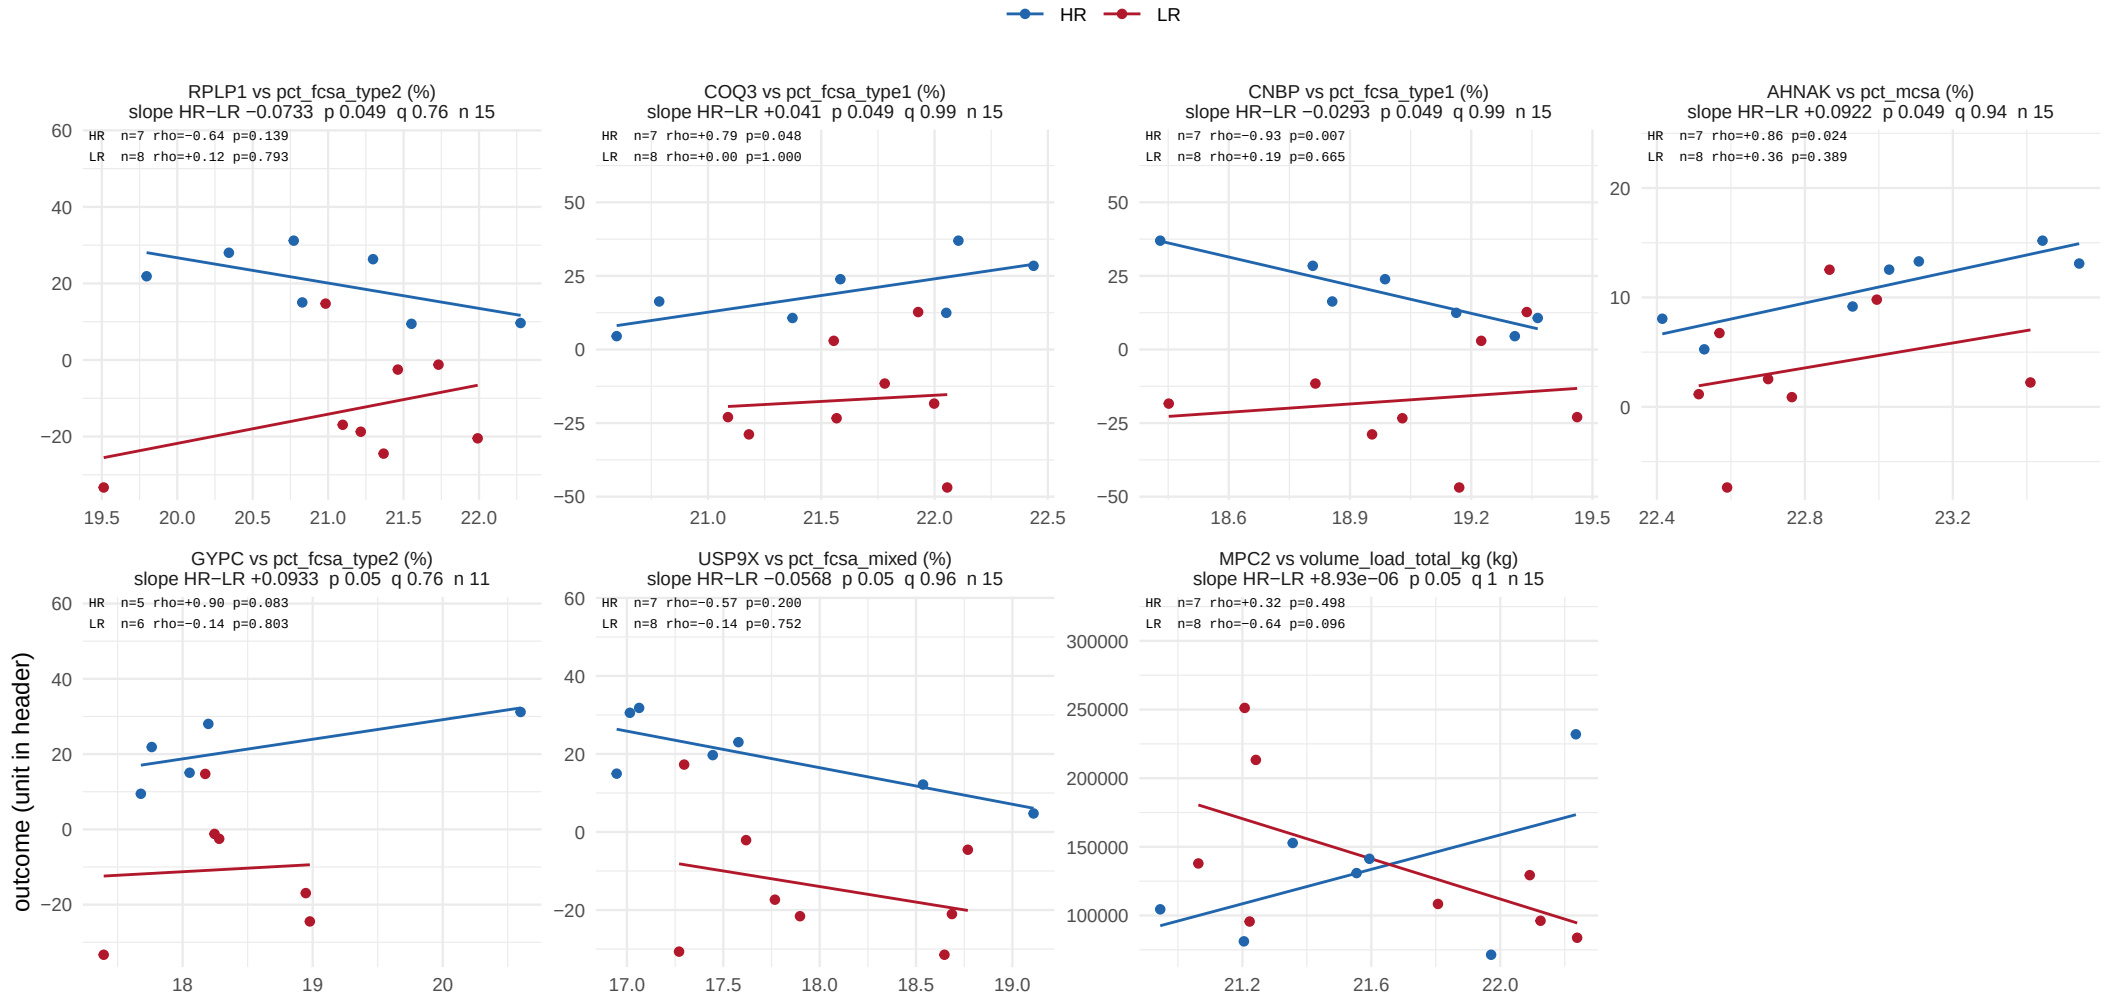

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


482 of 9765 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 1 of 41.

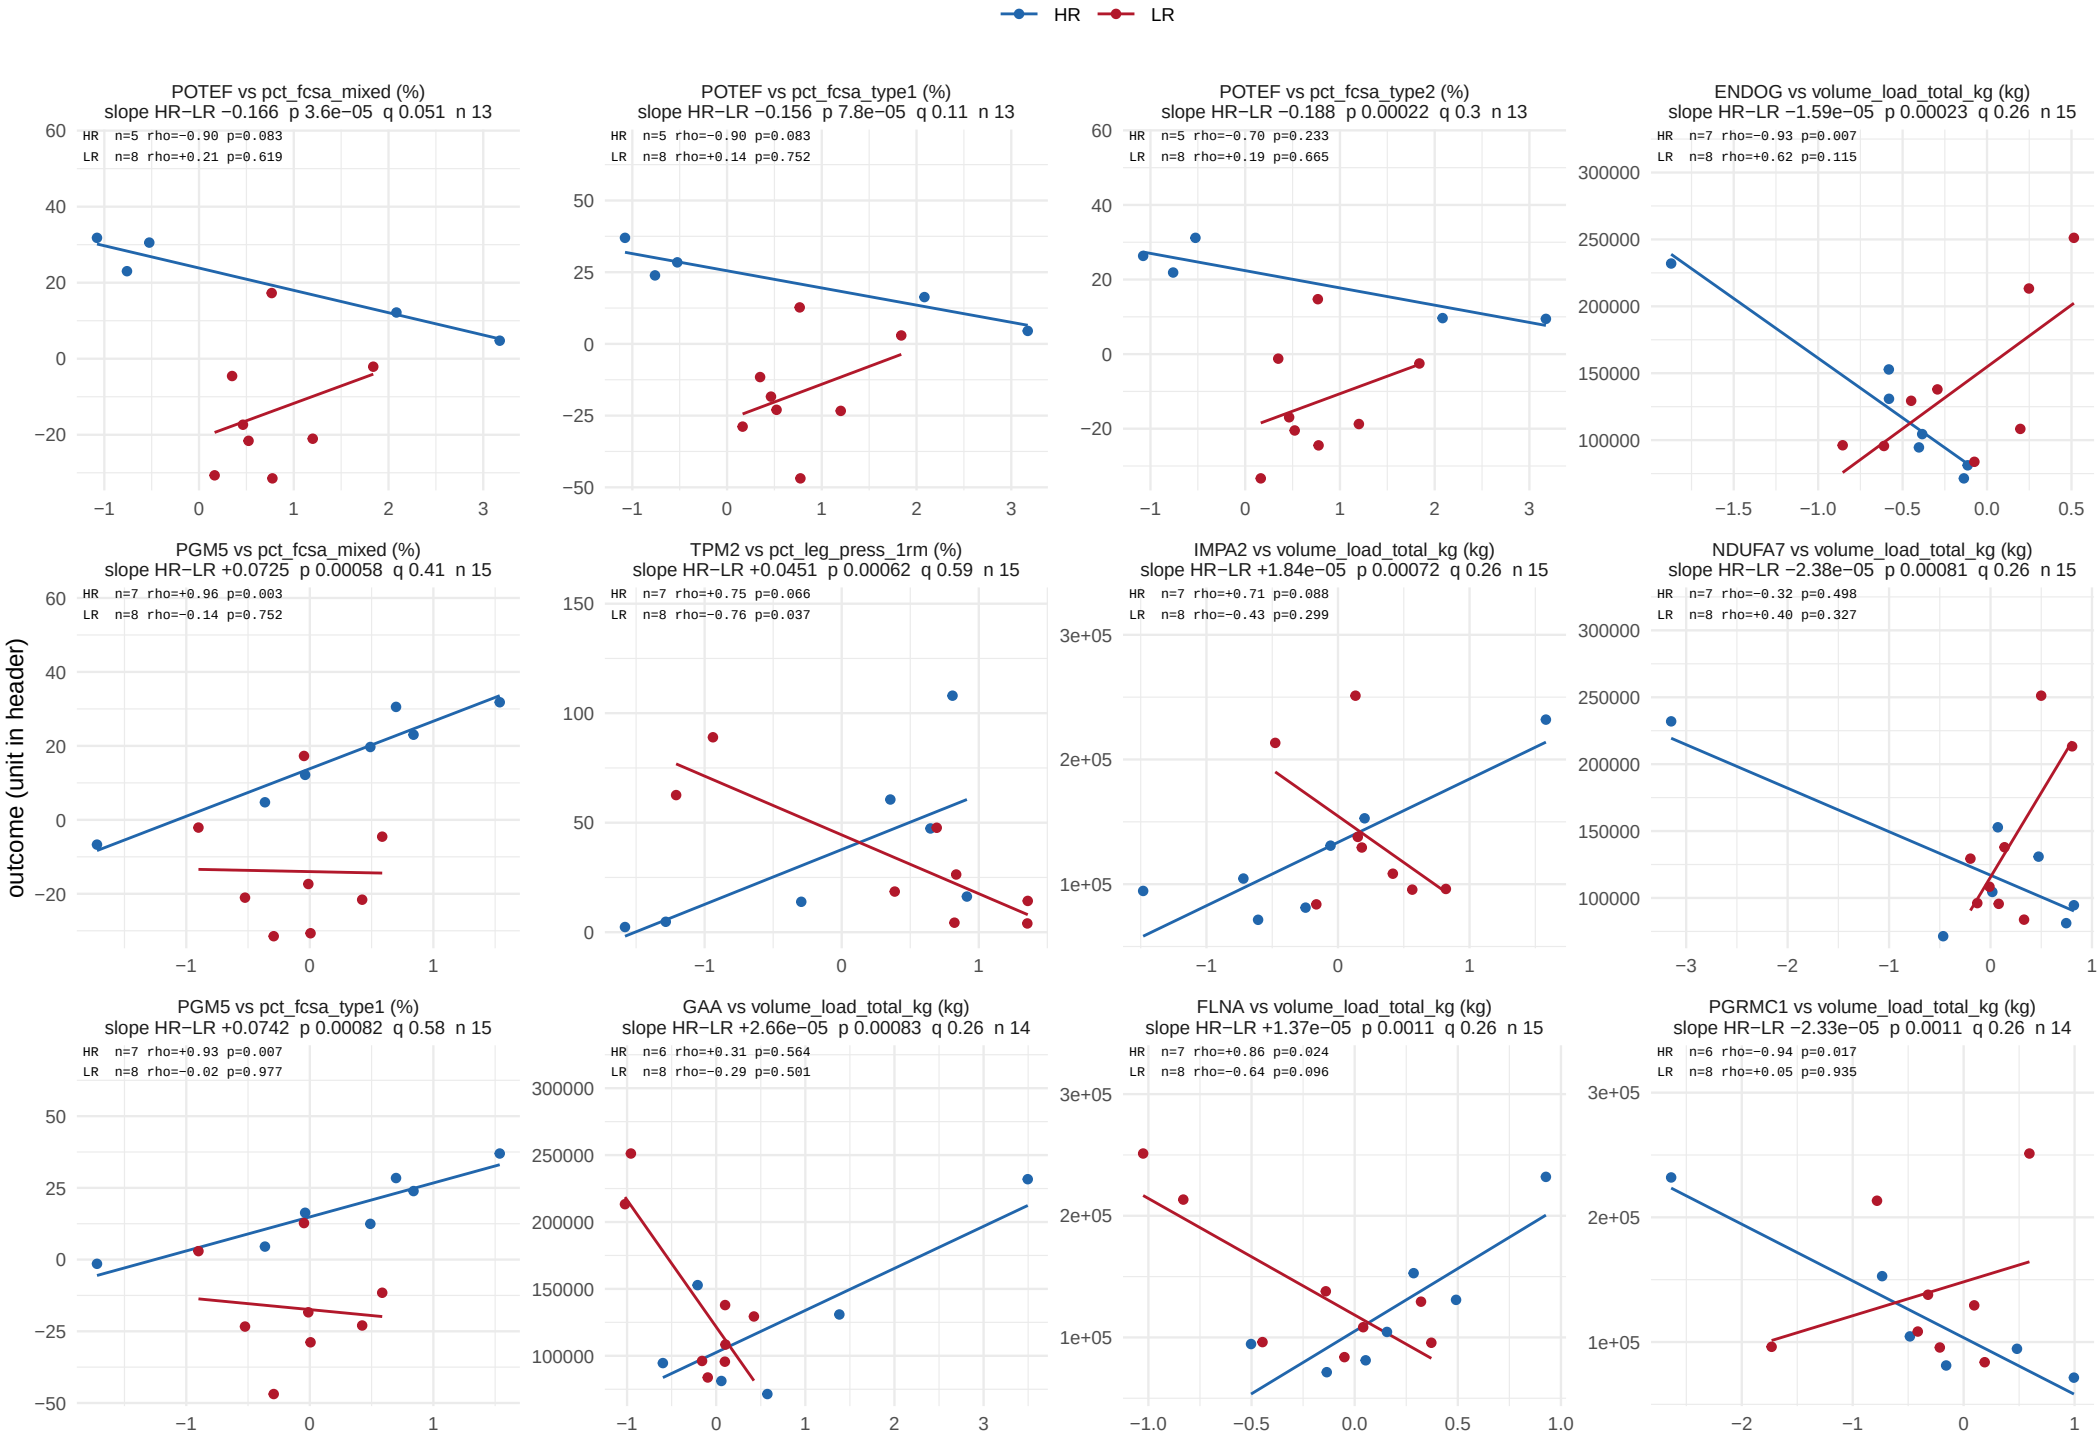

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


482 of 9765 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 2 of 41.

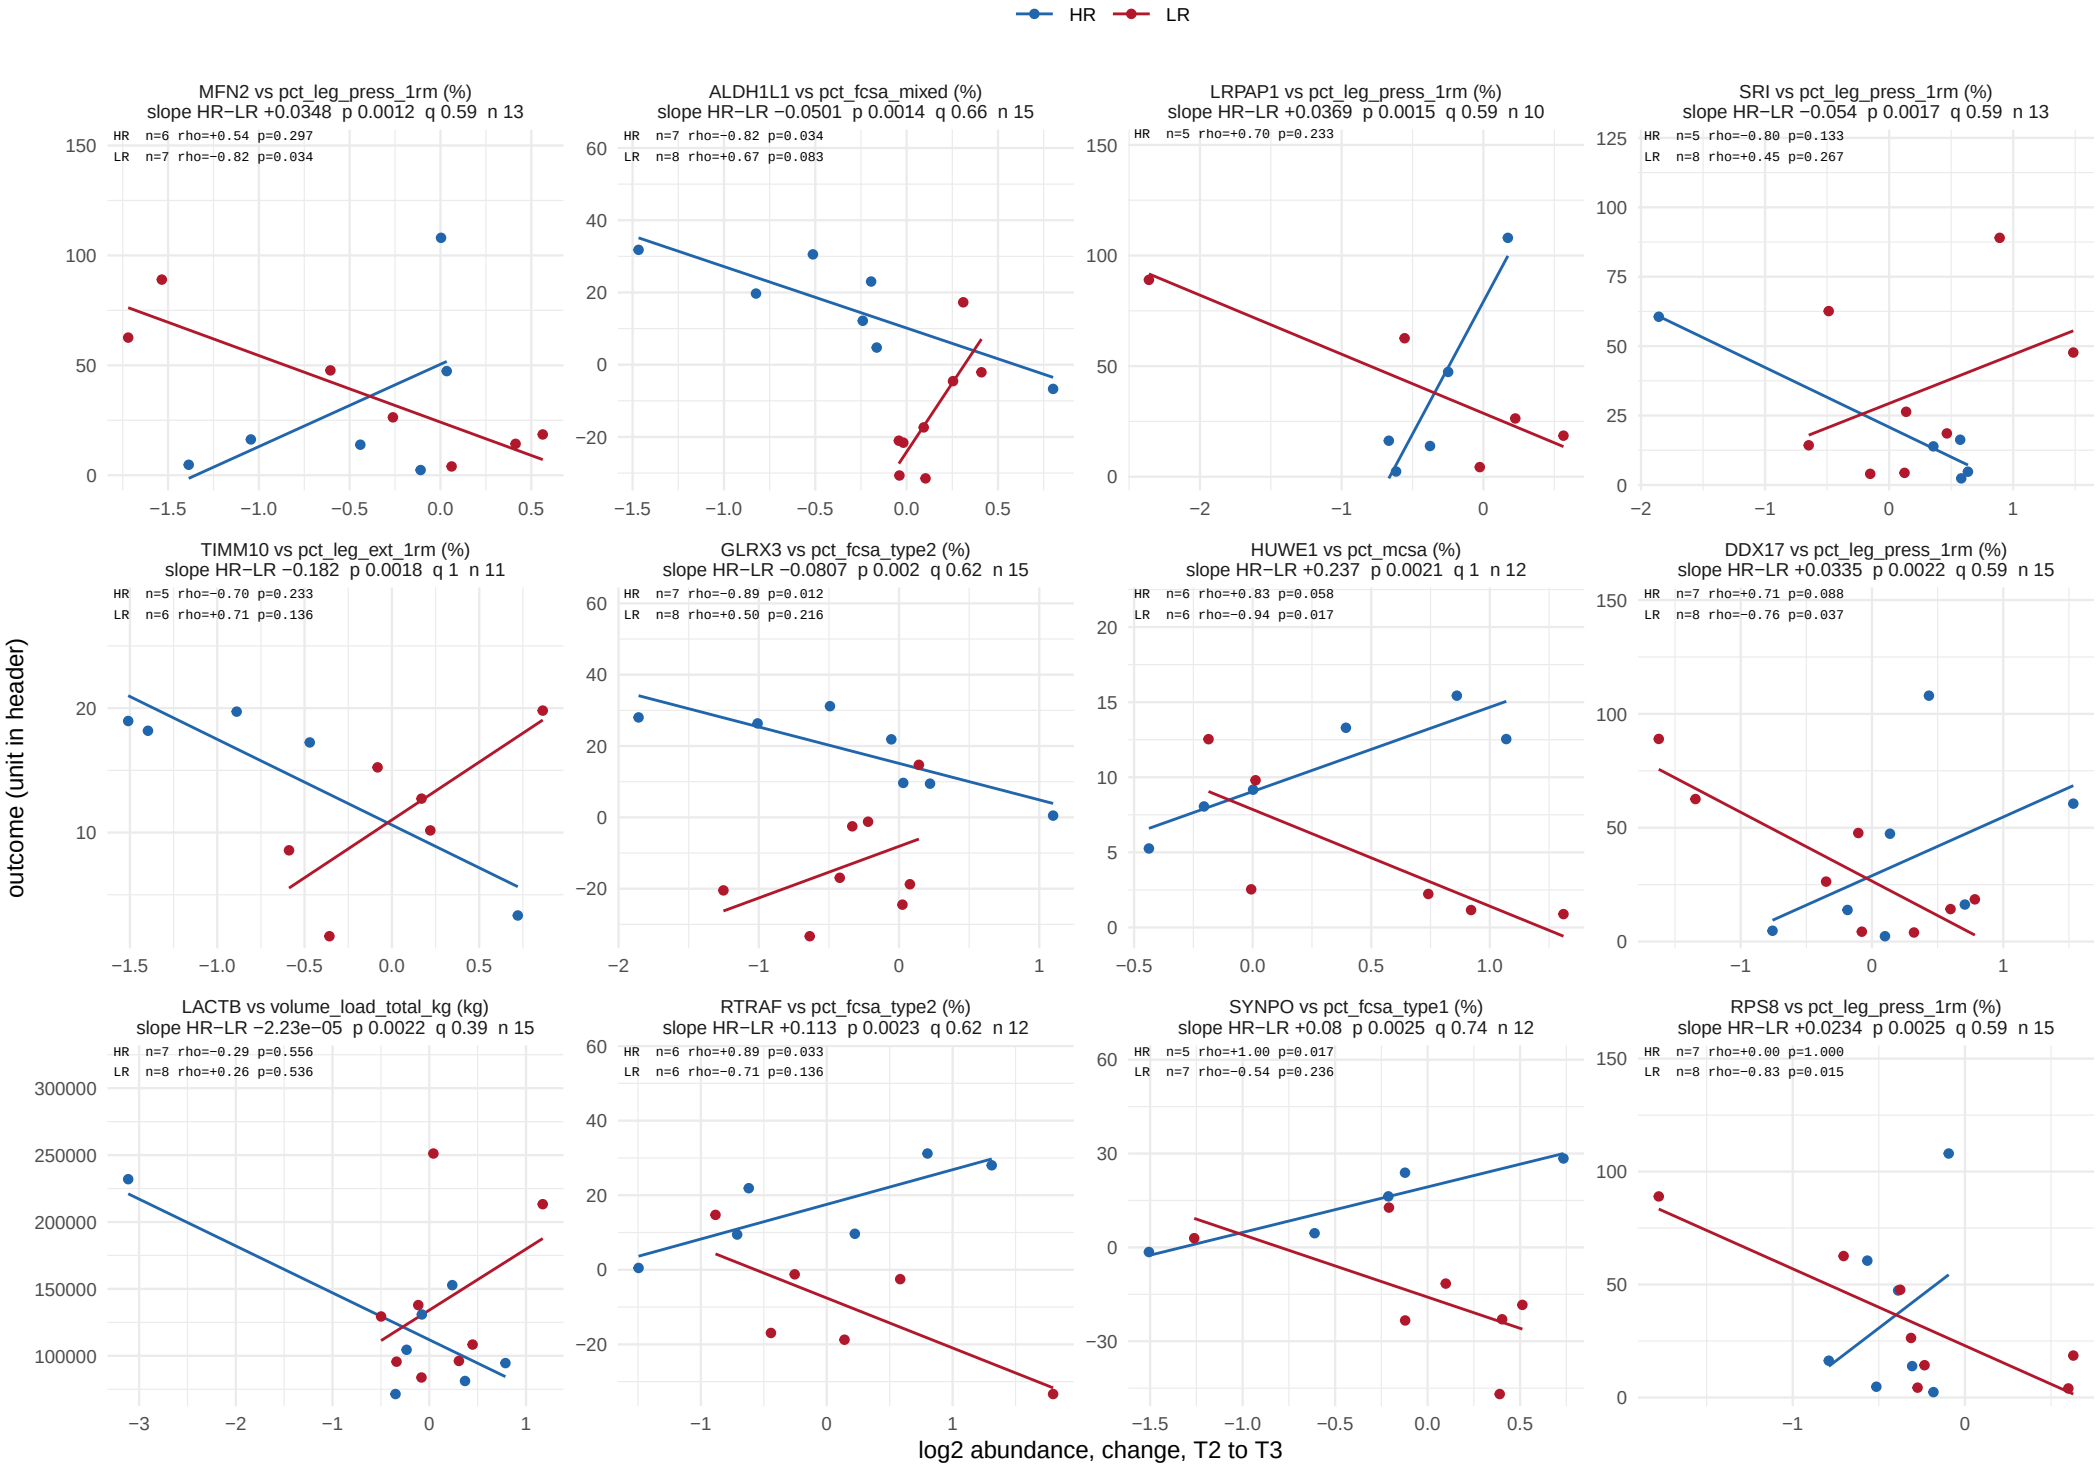

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


482 of 9765 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 3 of 41.

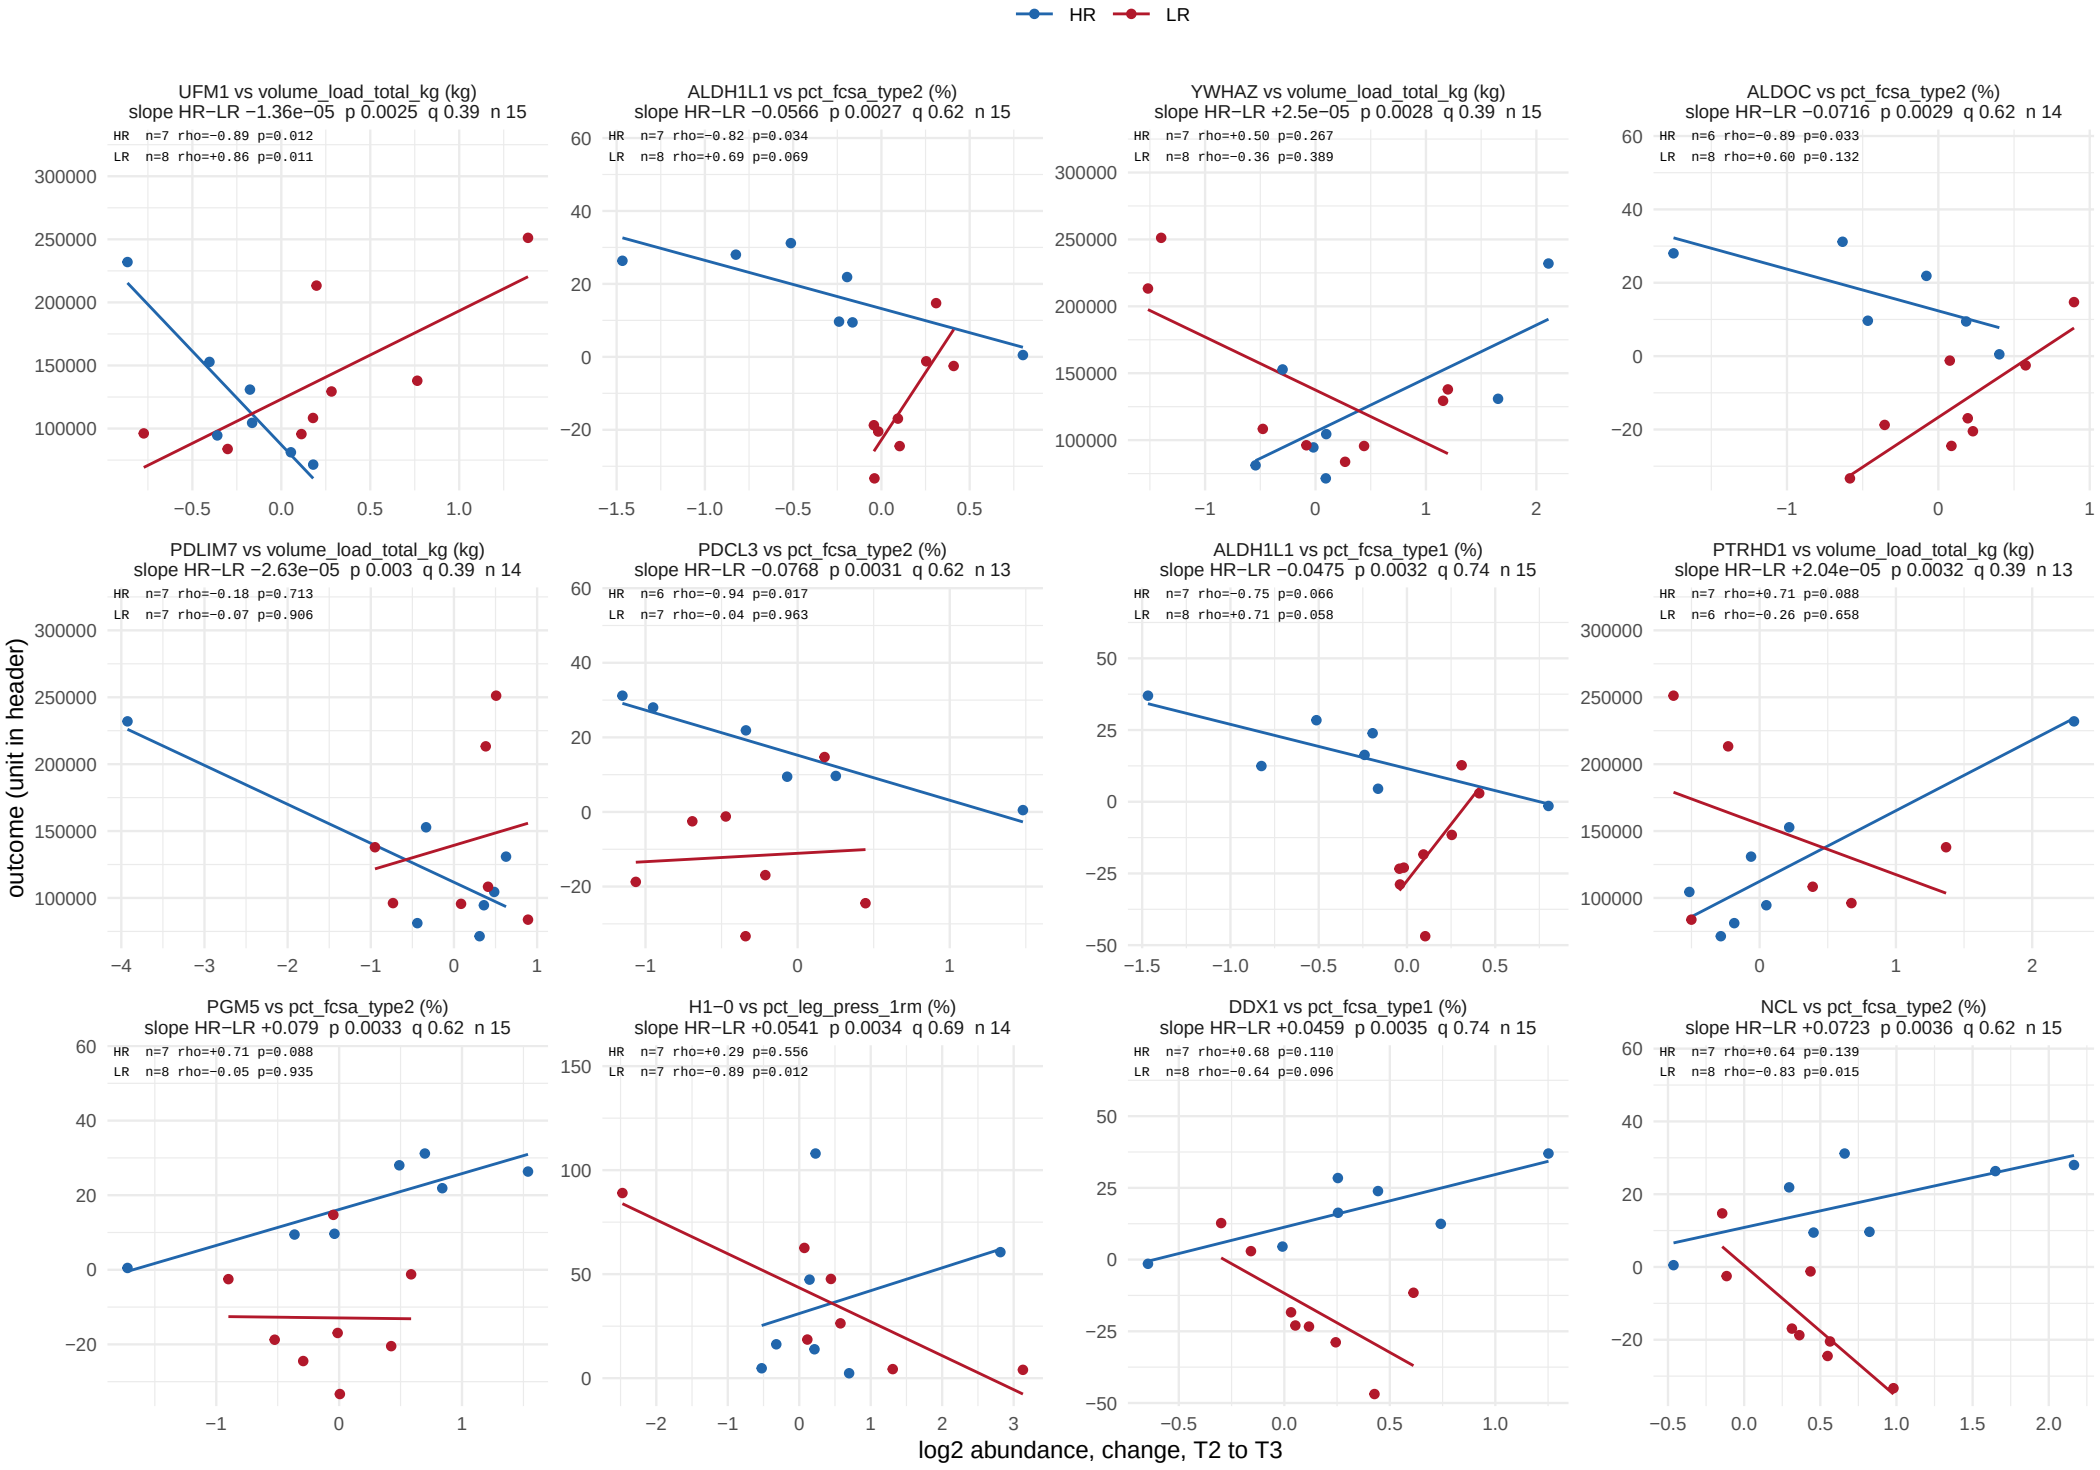

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


482 of 9765 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 4 of 41.

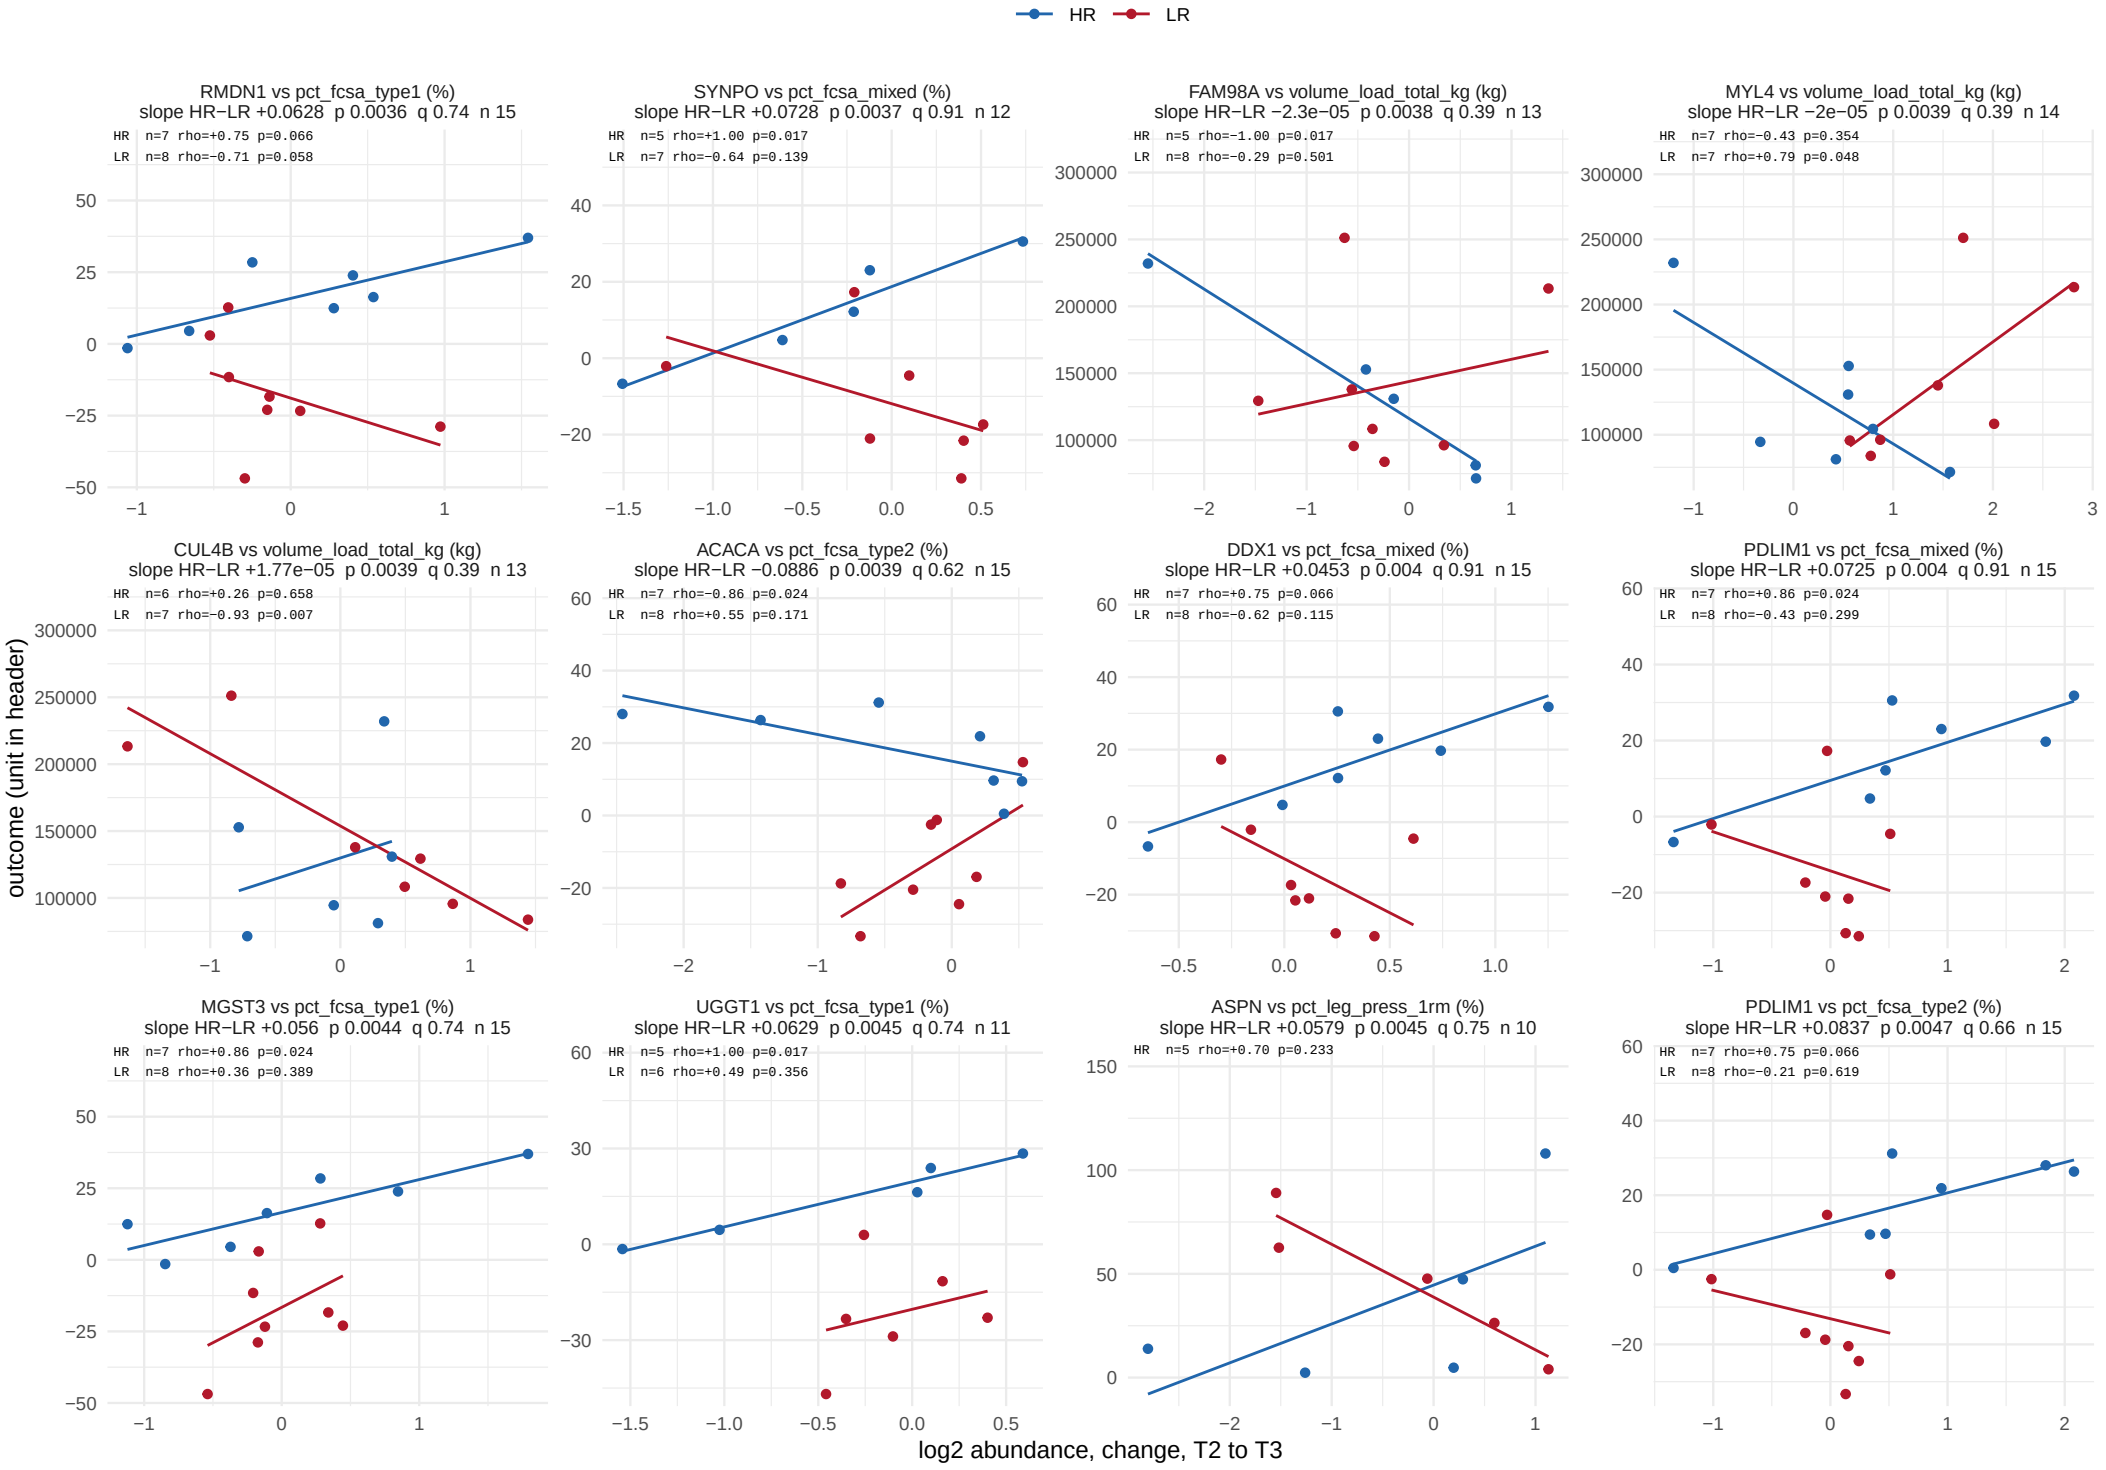

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


482 of 9765 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 5 of 41.

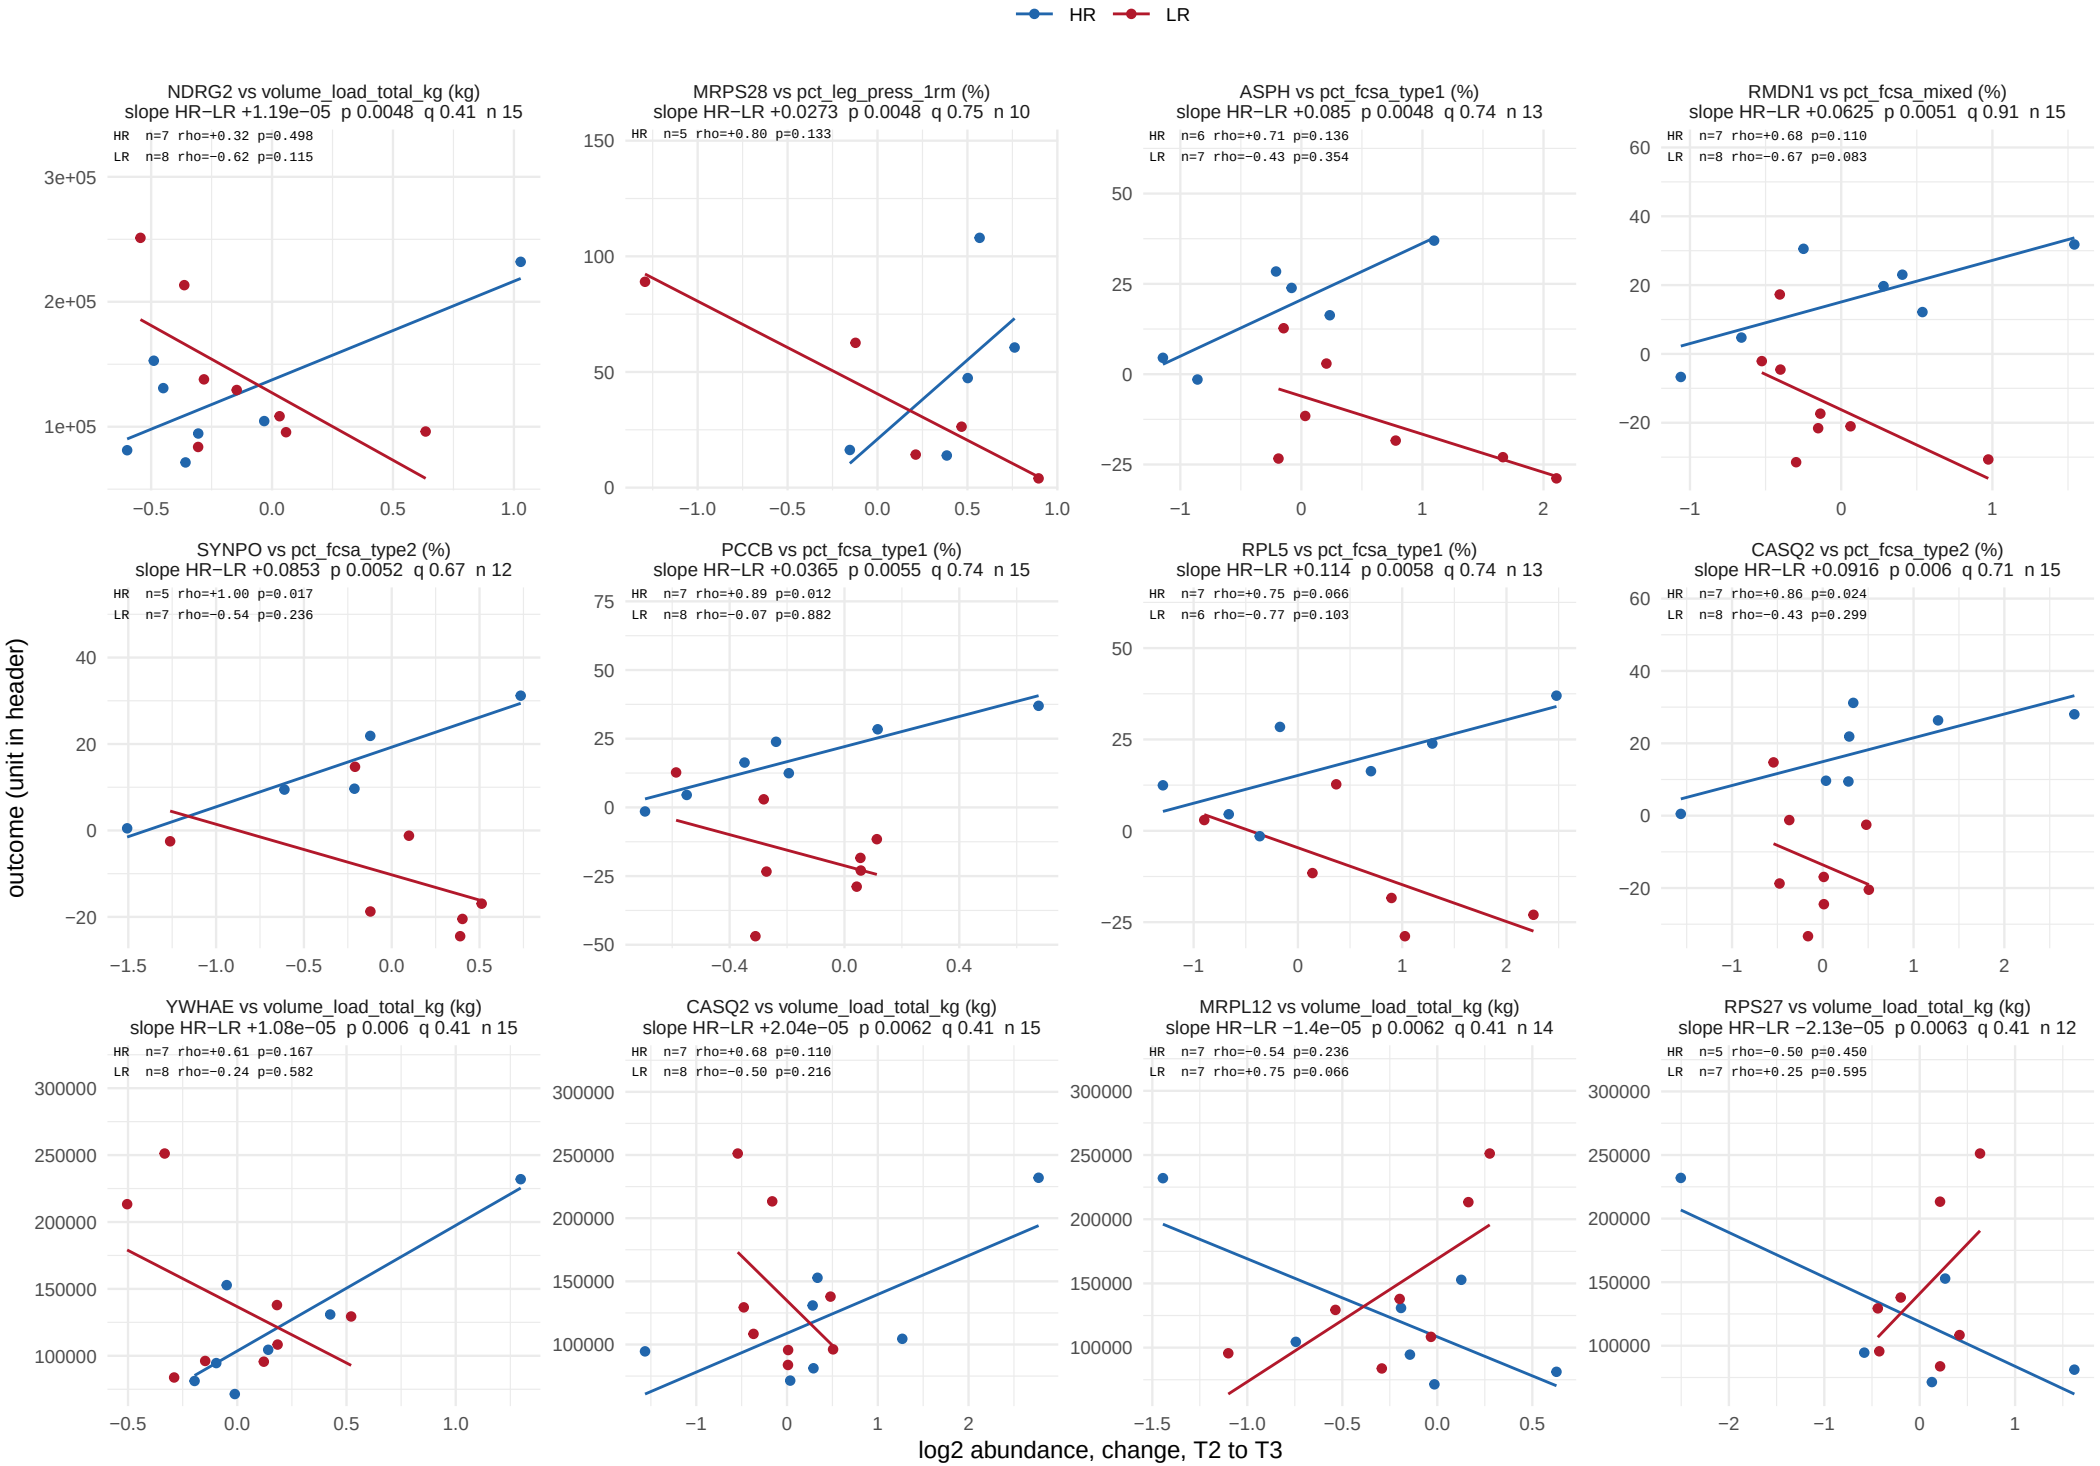

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


482 of 9765 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 6 of 41.

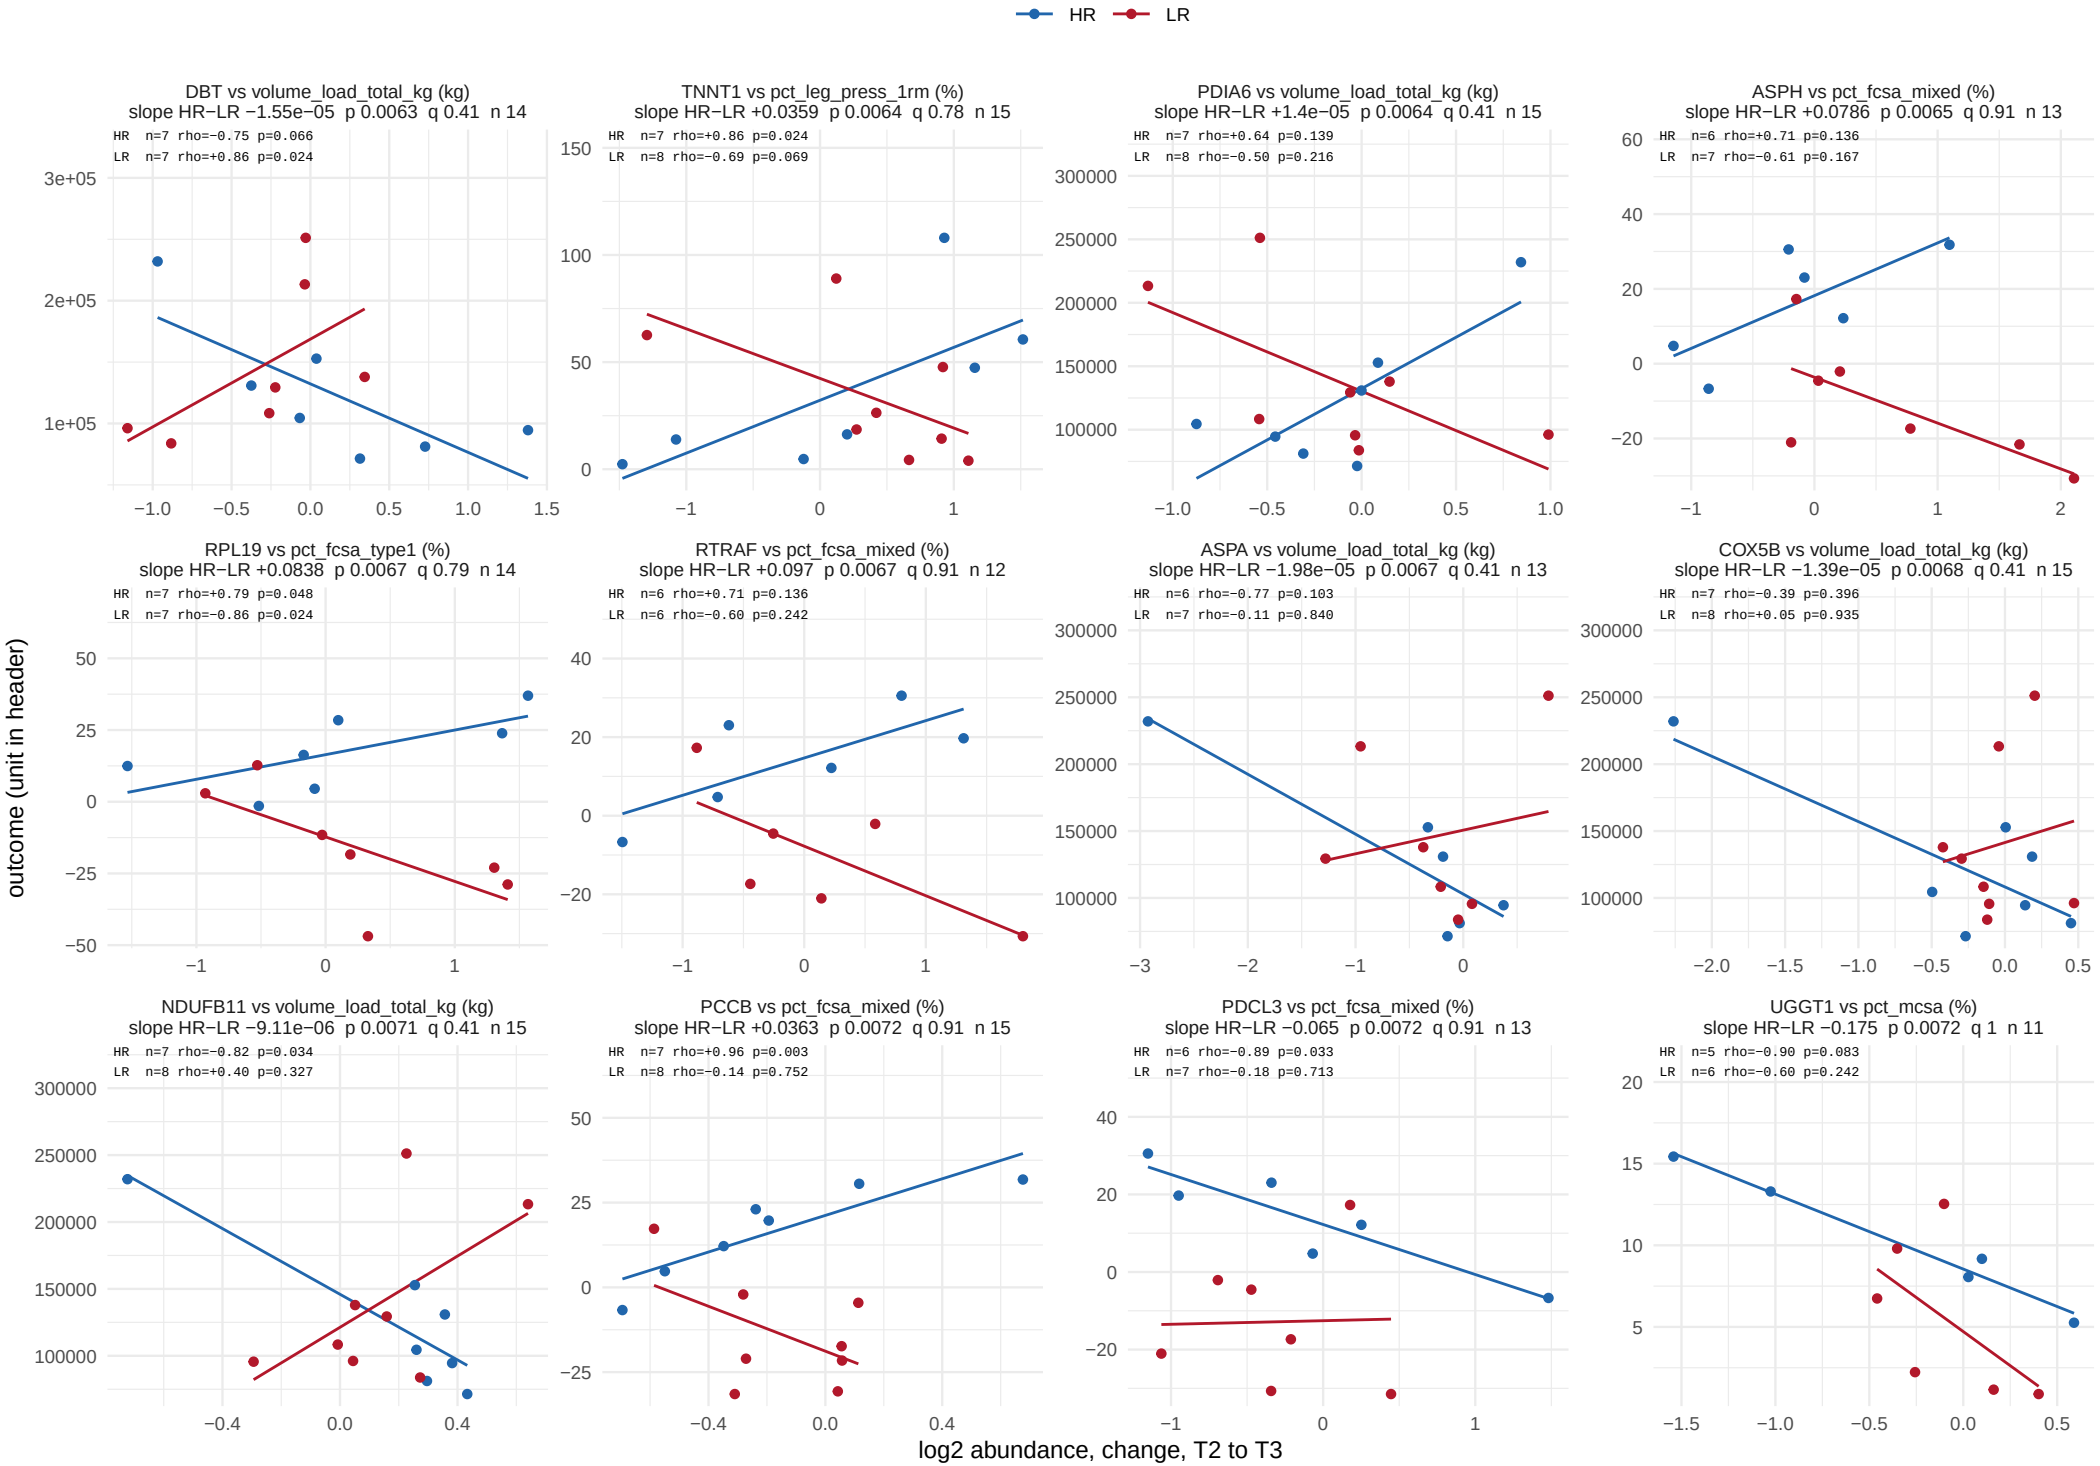

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


482 of 9765 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 7 of 41.

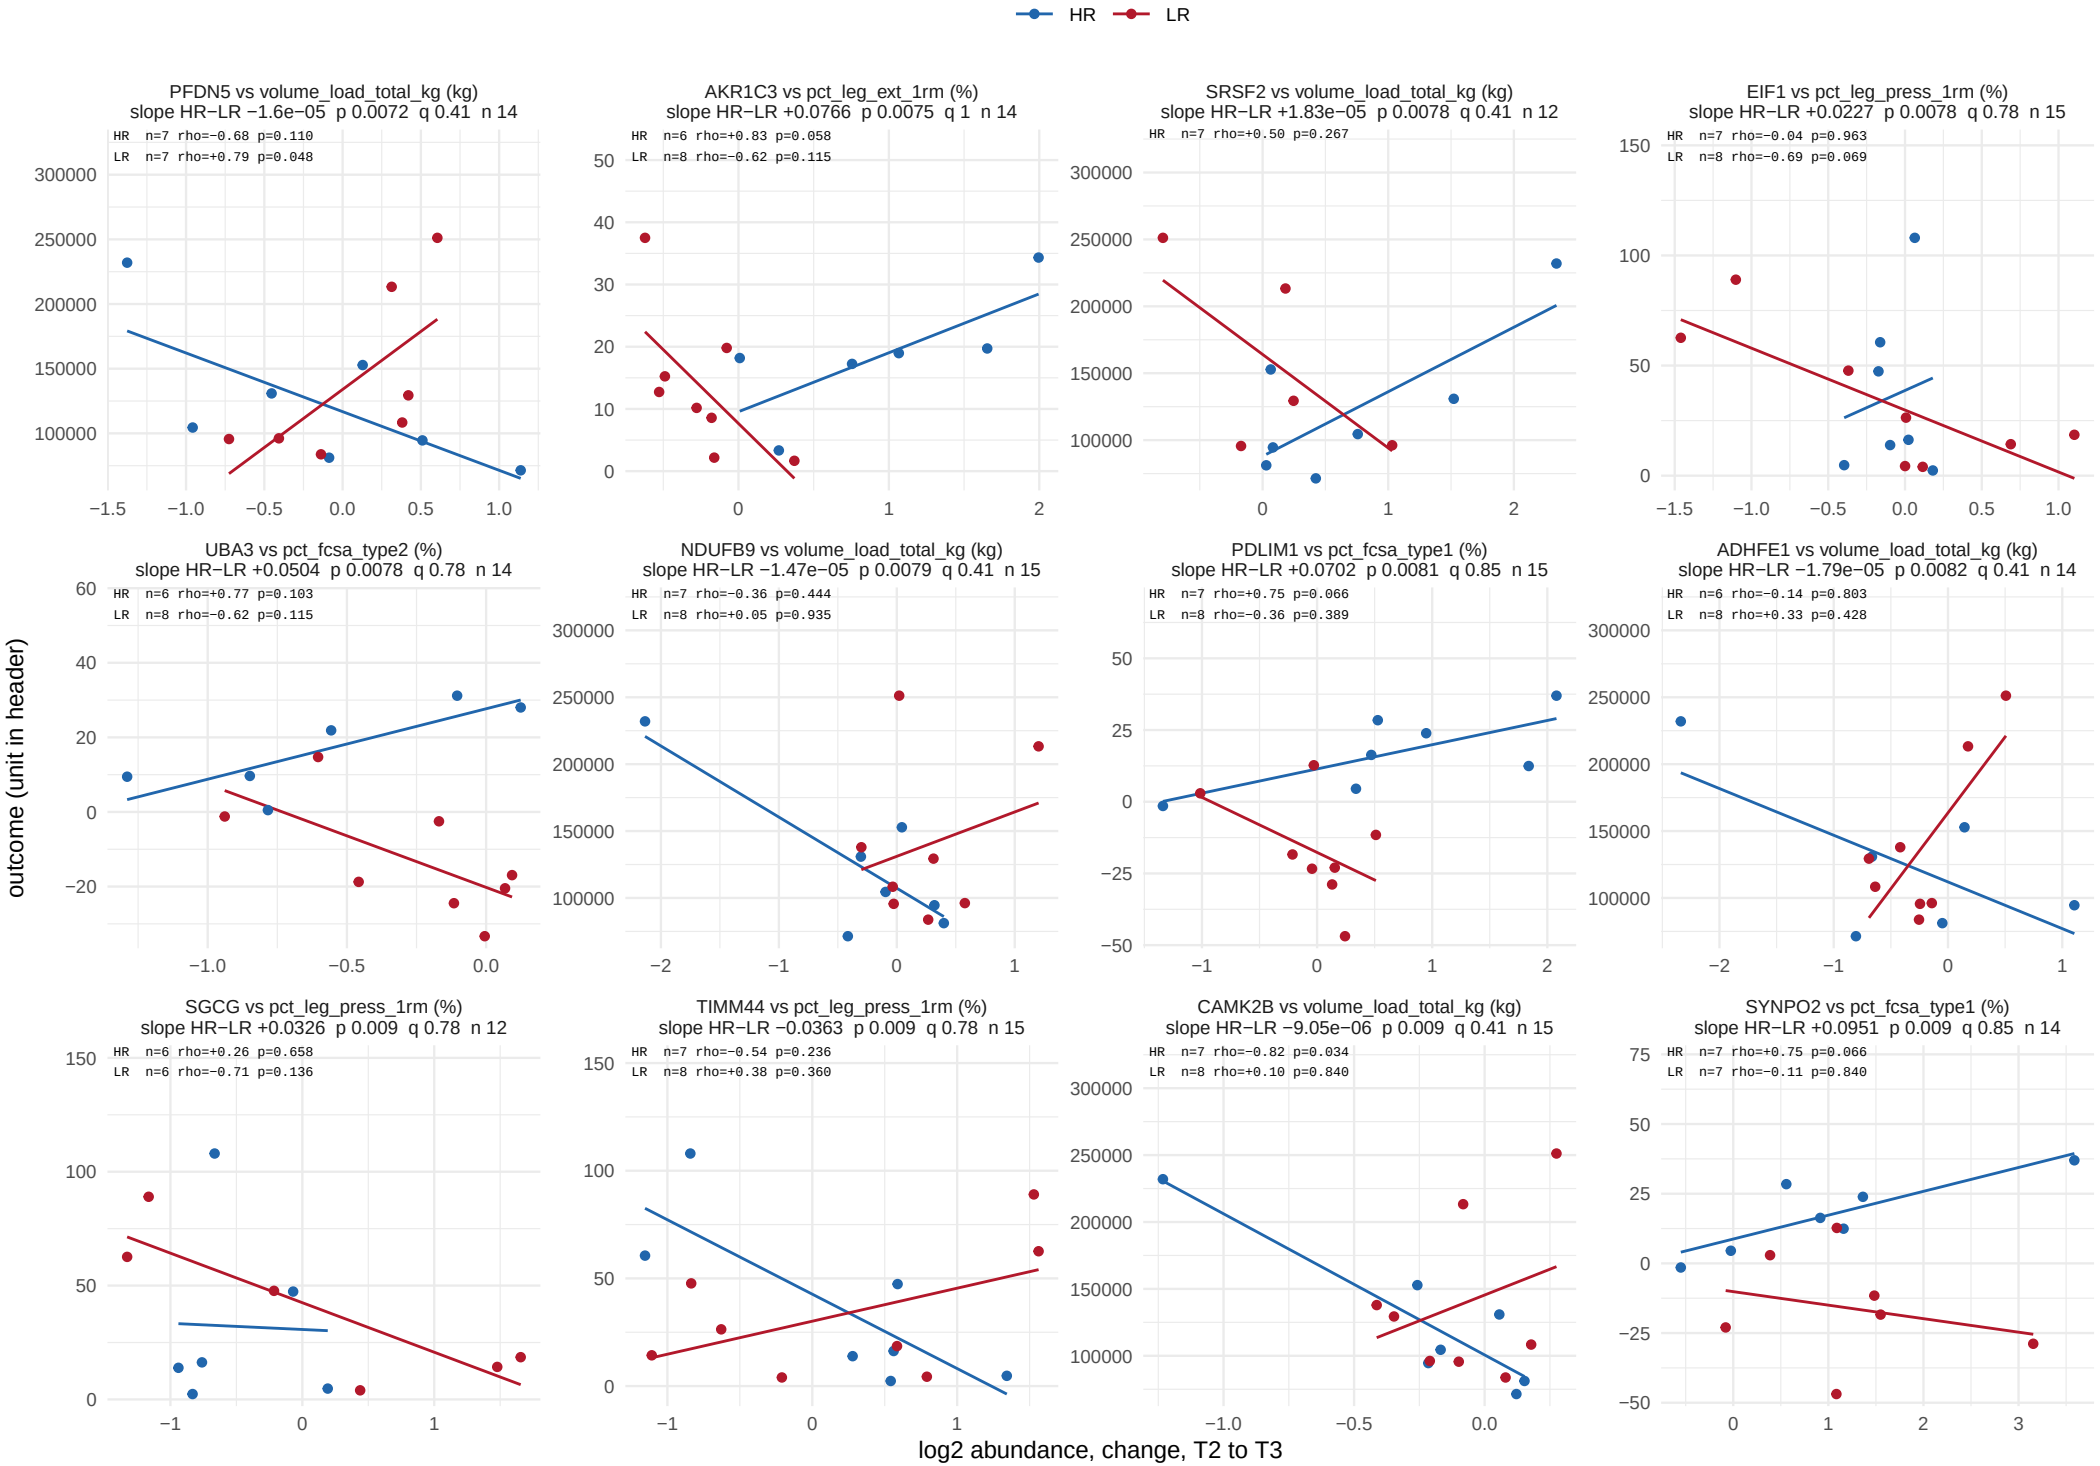

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


482 of 9765 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 8 of 41.

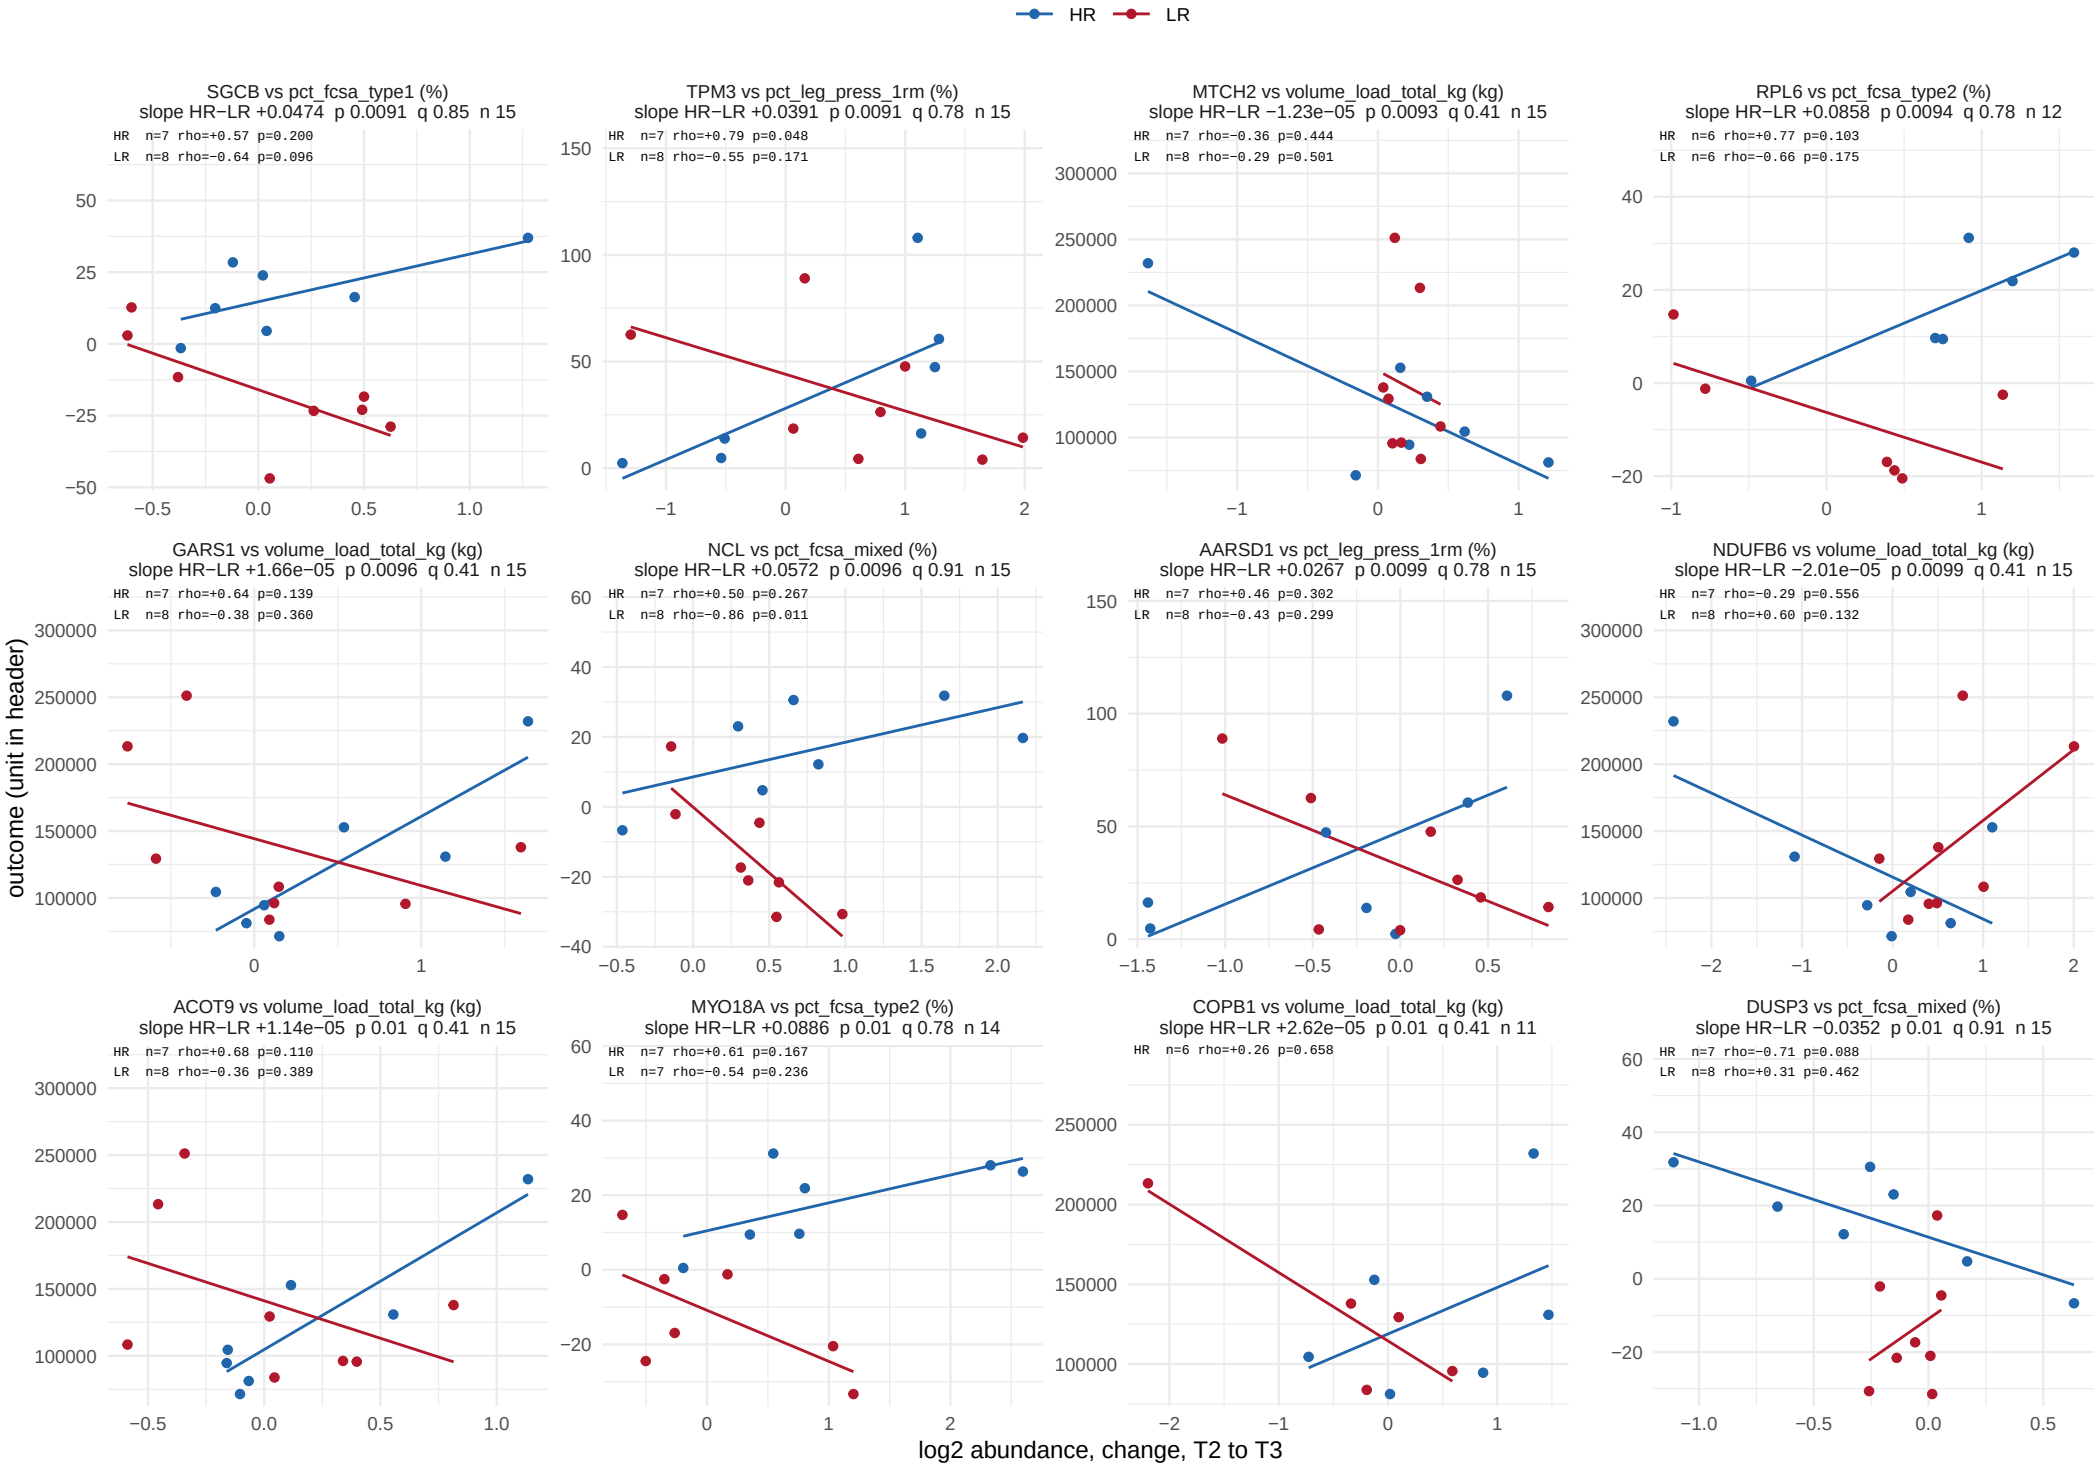

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


482 of 9765 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 9 of 41.

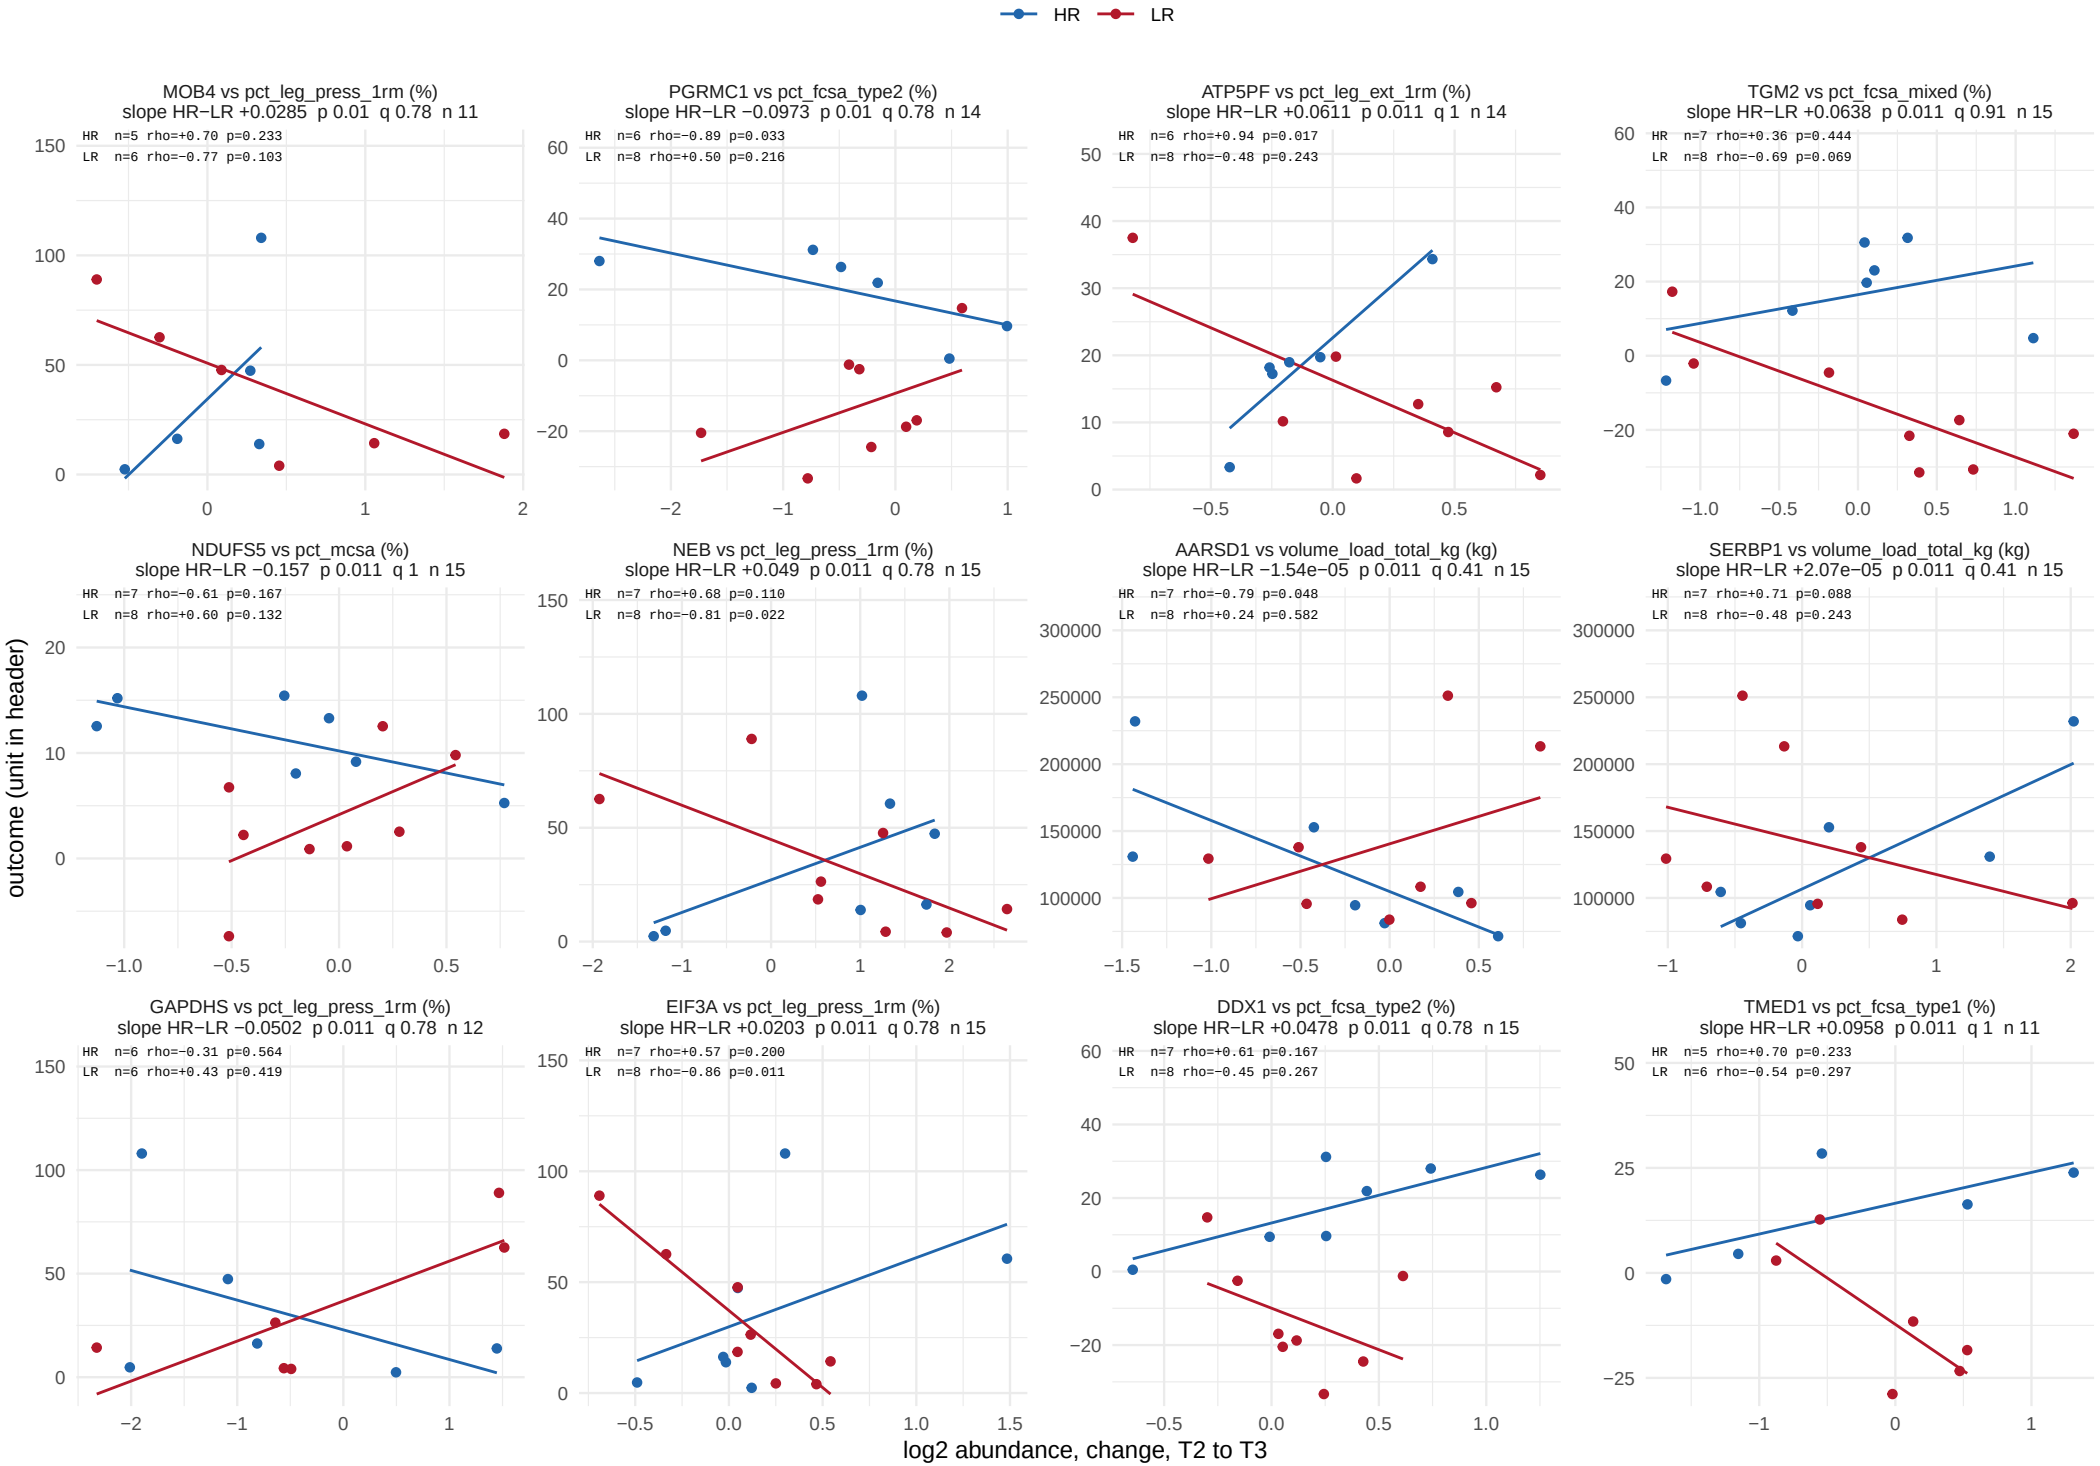

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


482 of 9765 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 10 of 41.

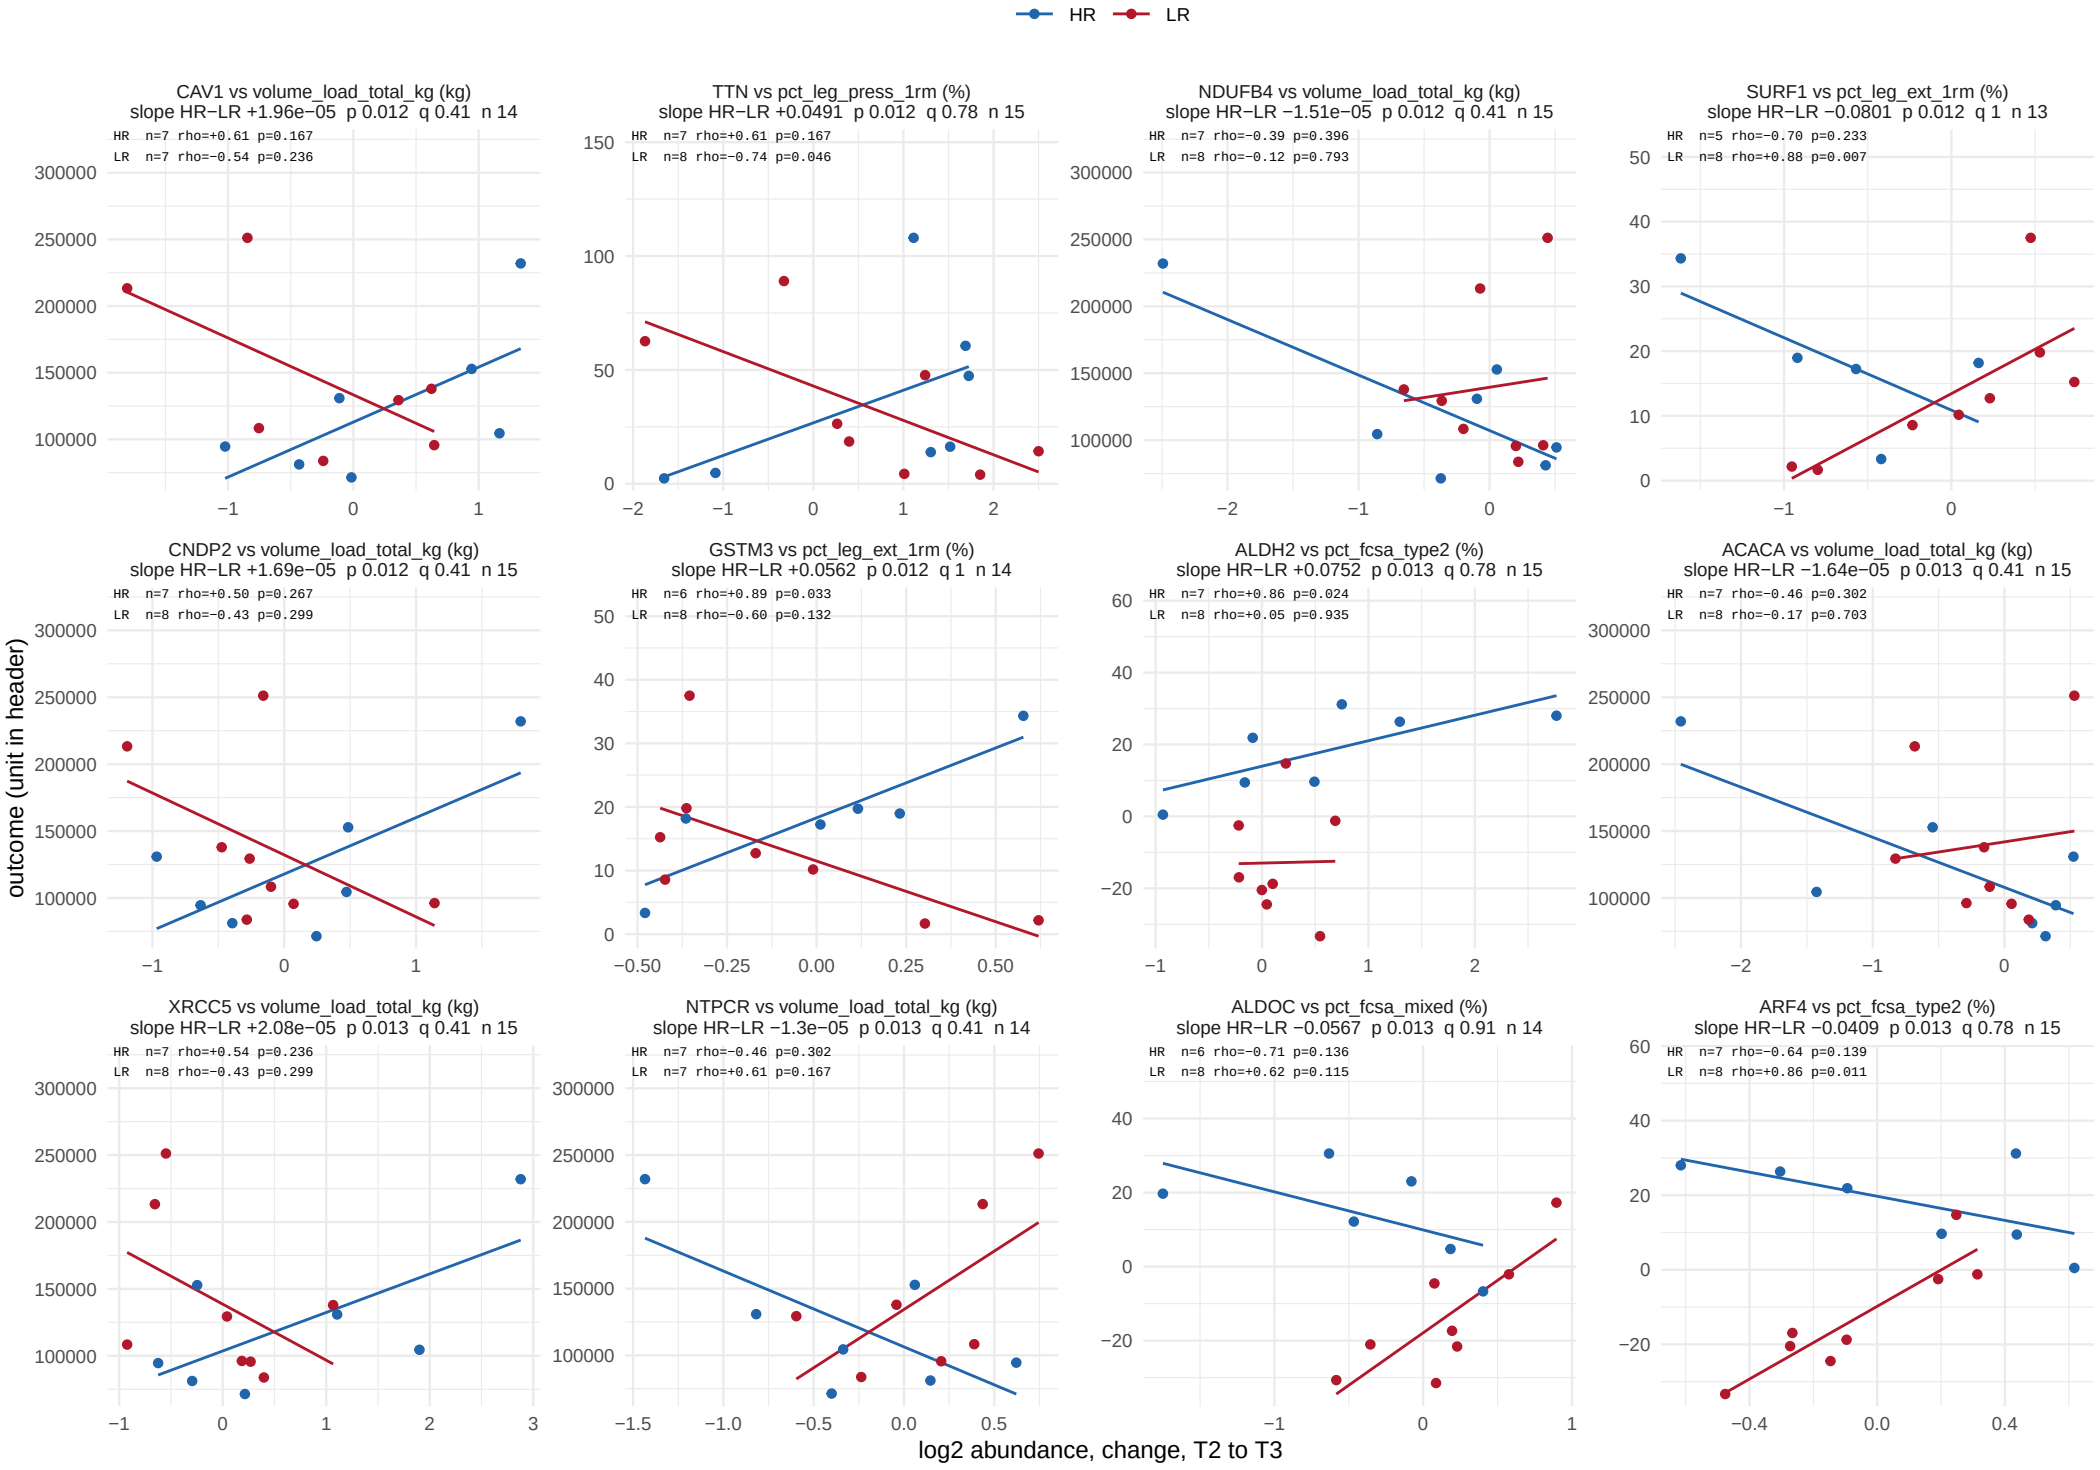

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


482 of 9765 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 11 of 41.

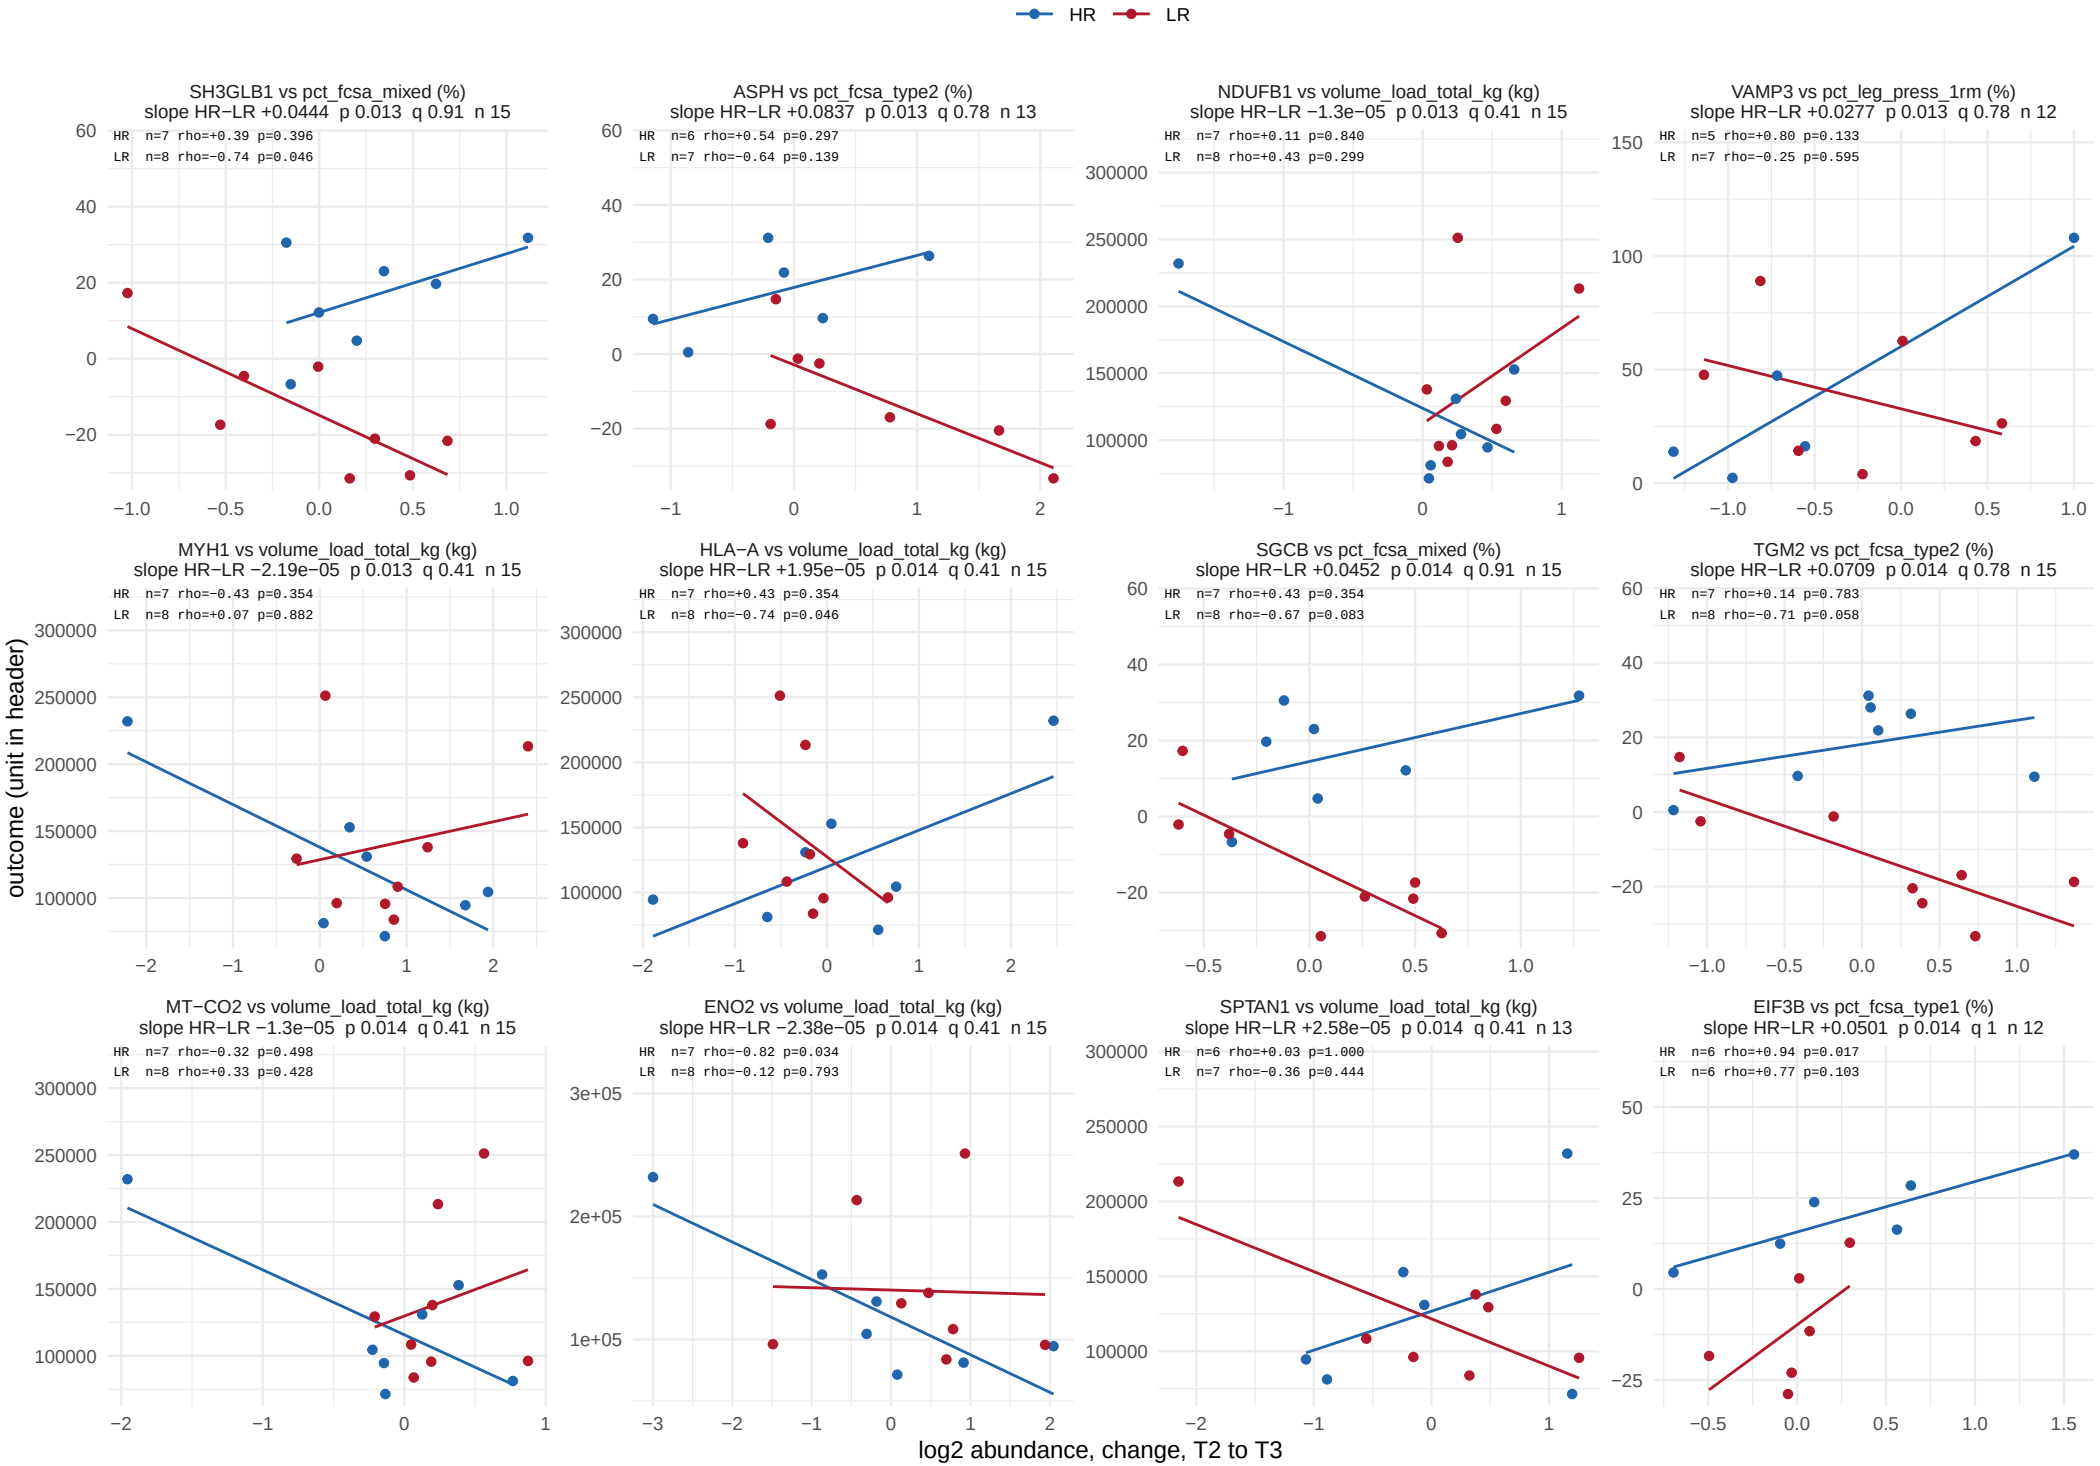

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


482 of 9765 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 12 of 41.

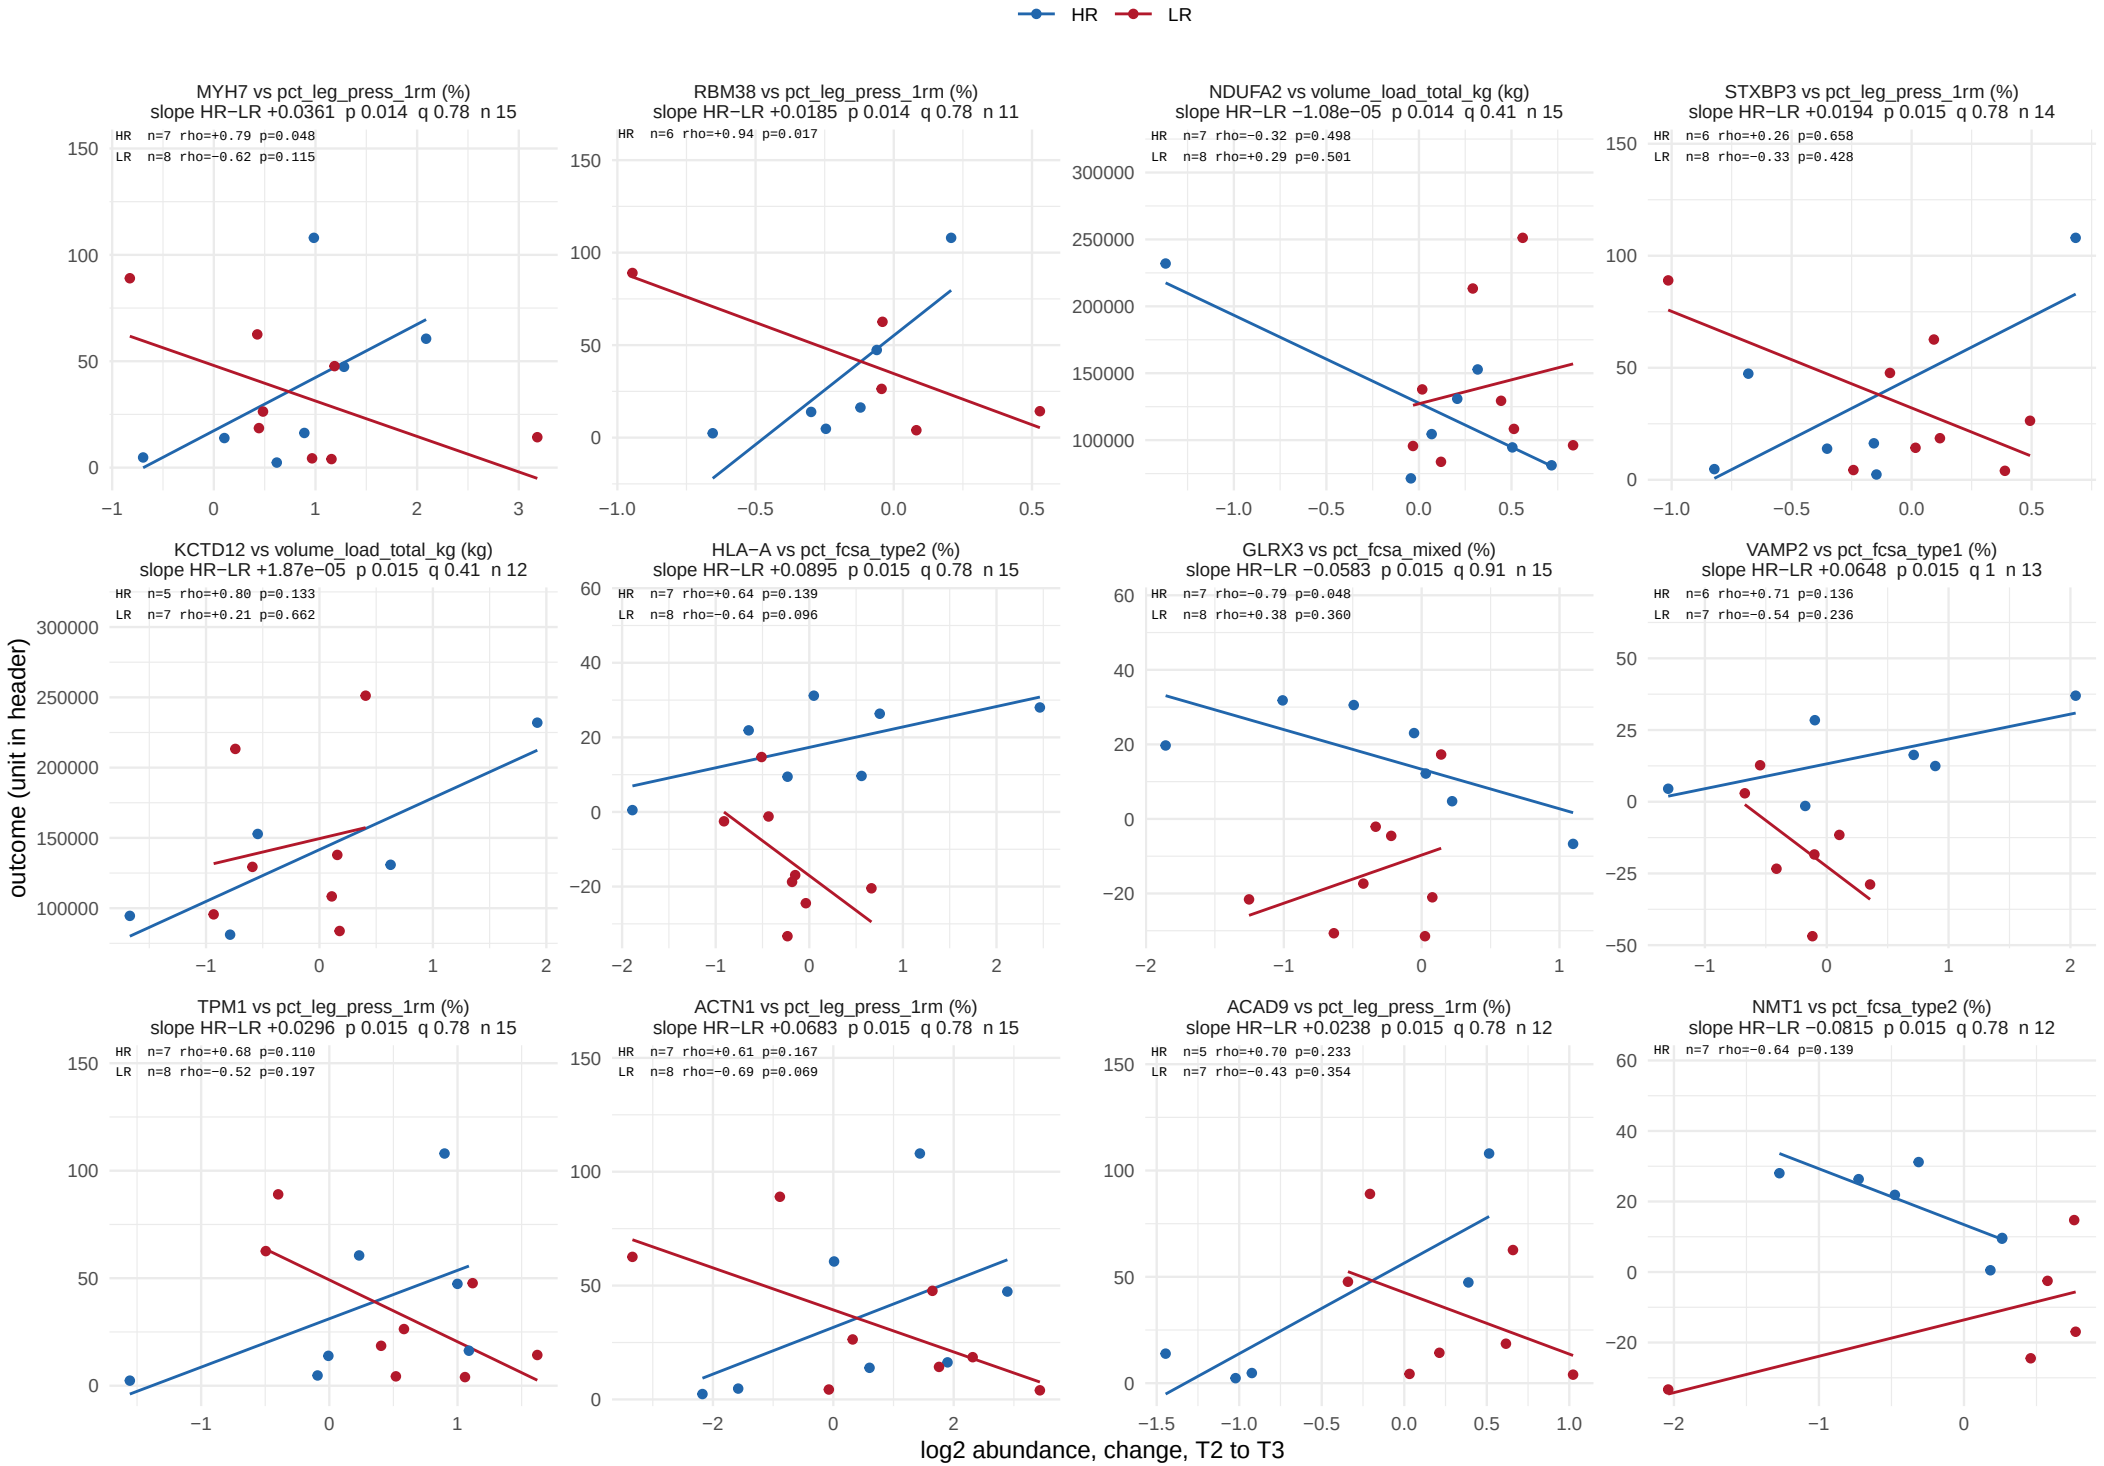

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


482 of 9765 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 13 of 41.

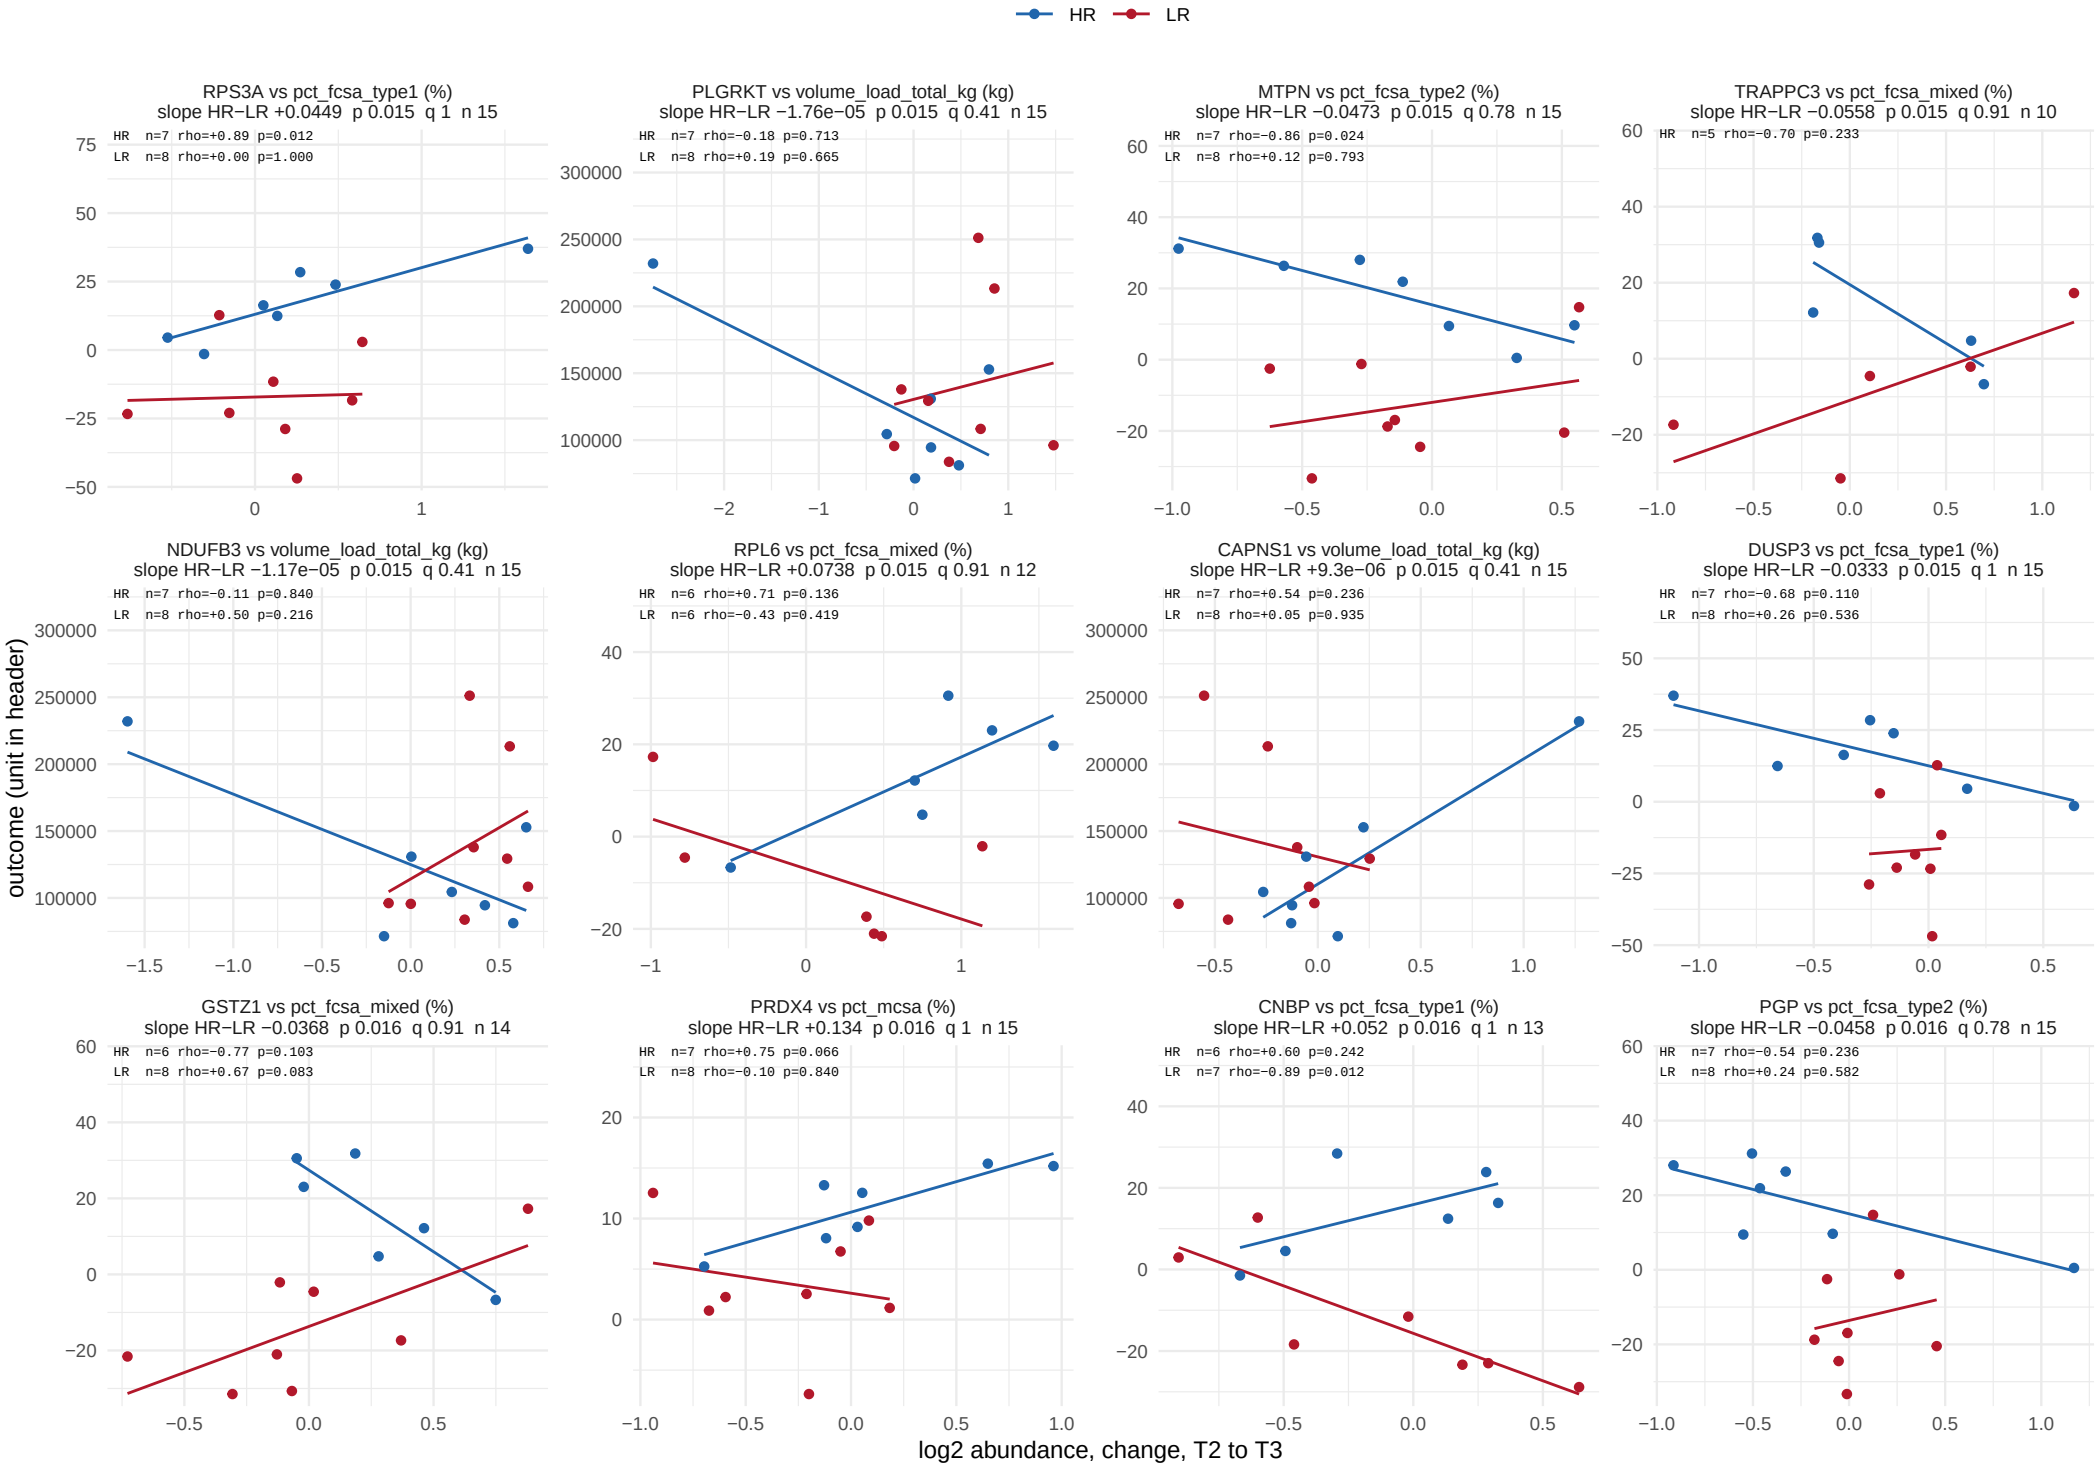

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


482 of 9765 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 14 of 41.

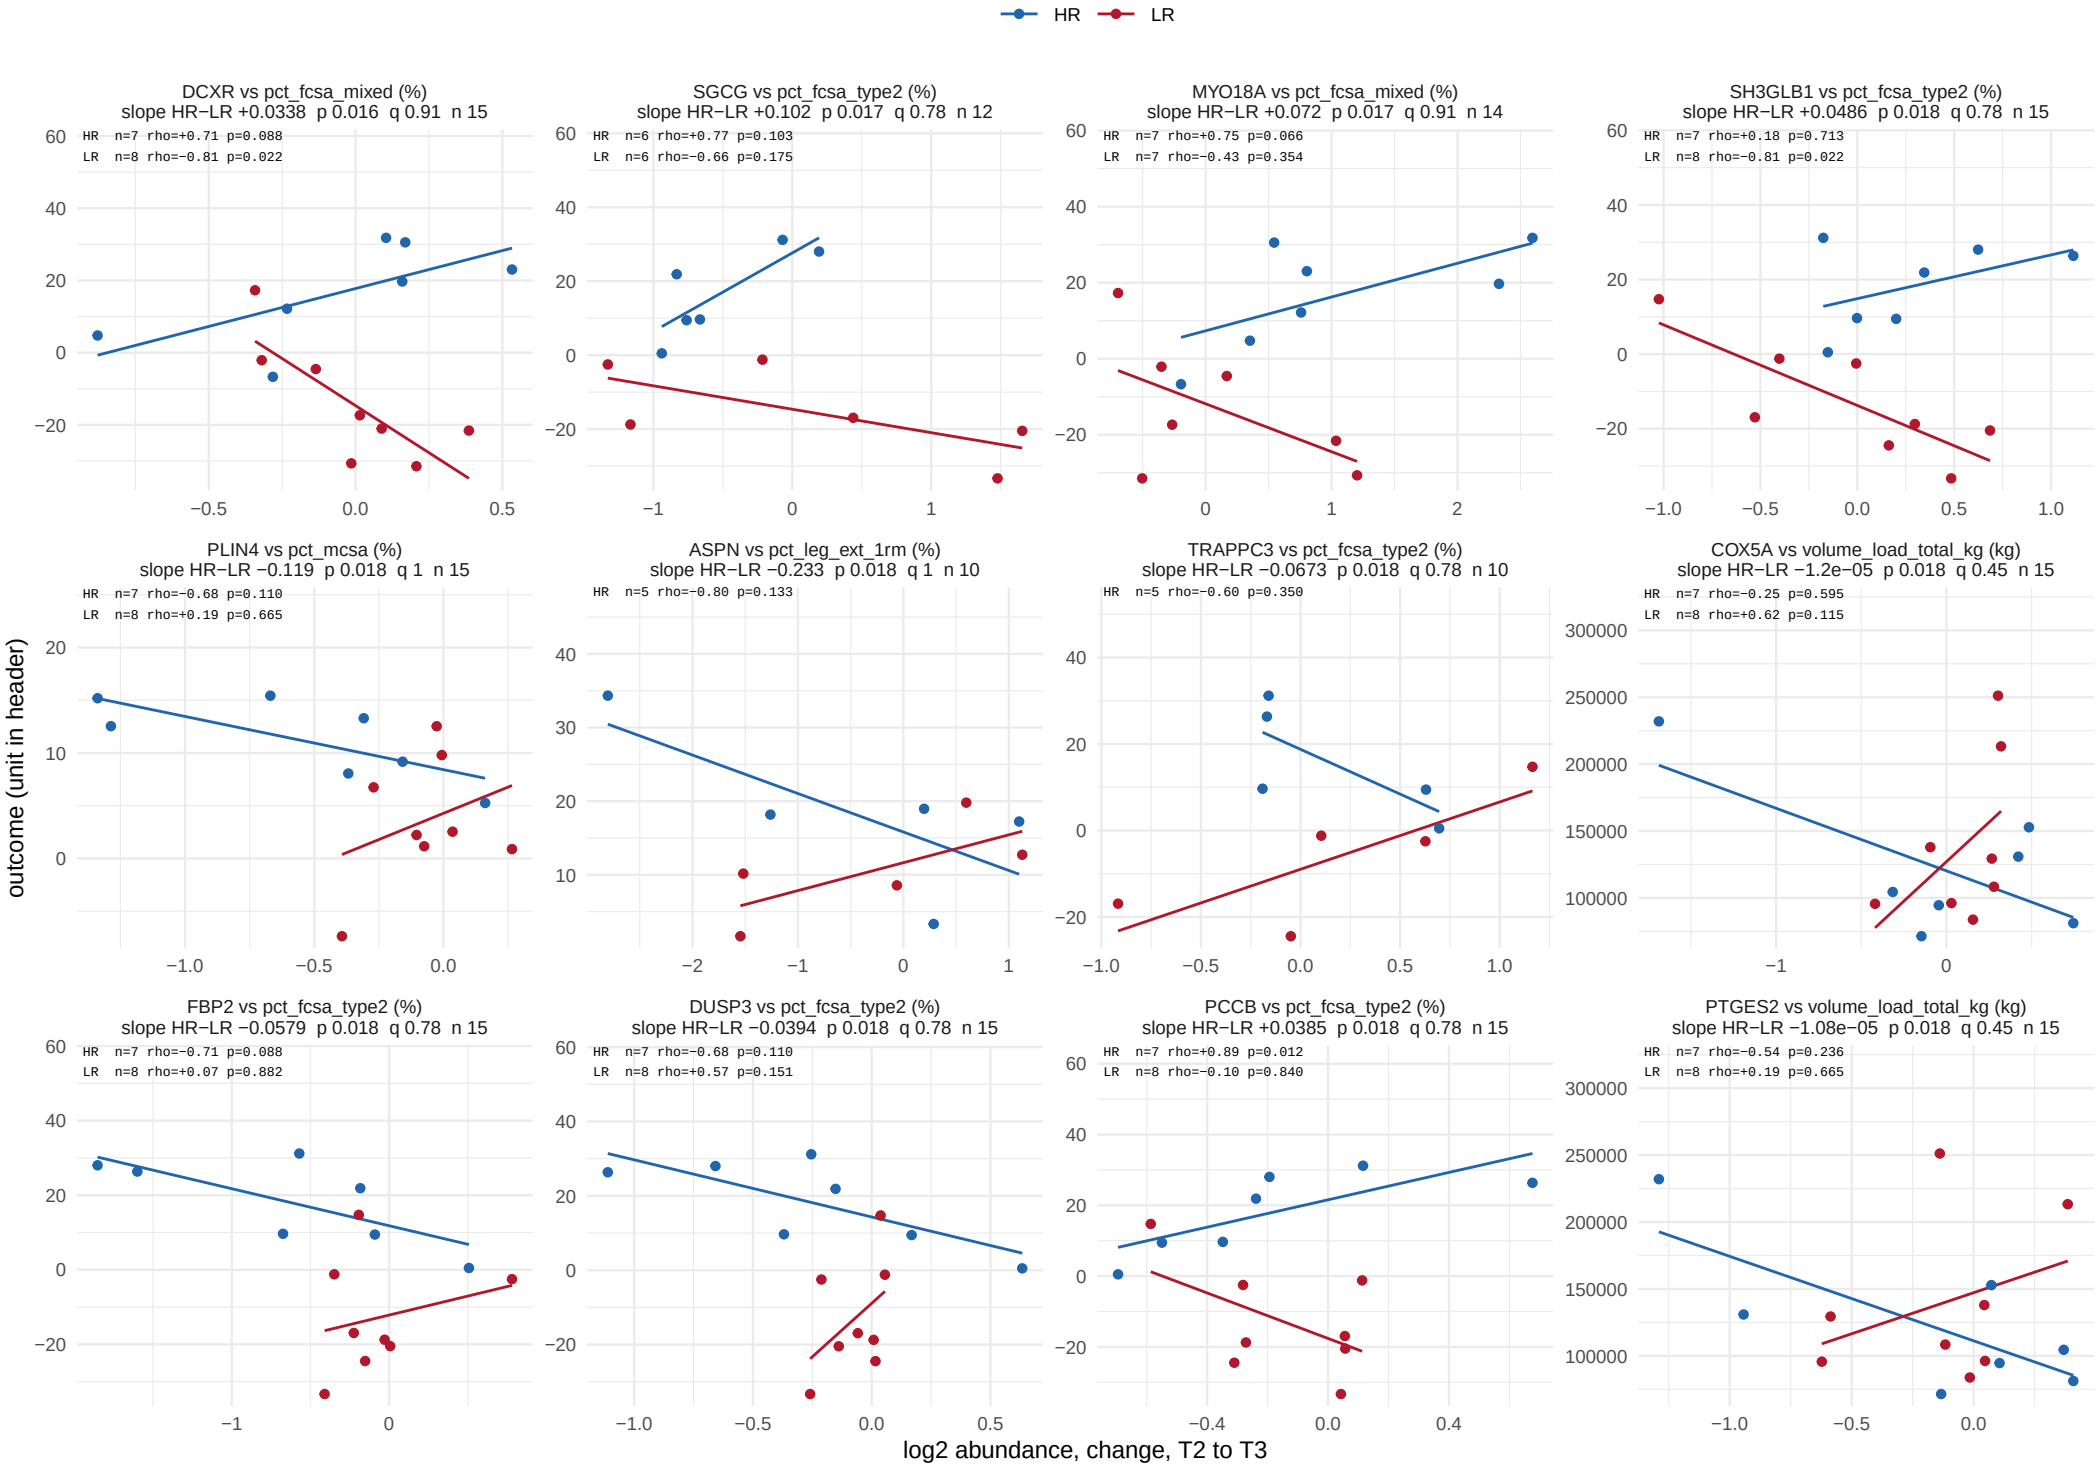

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


482 of 9765 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 15 of 41.

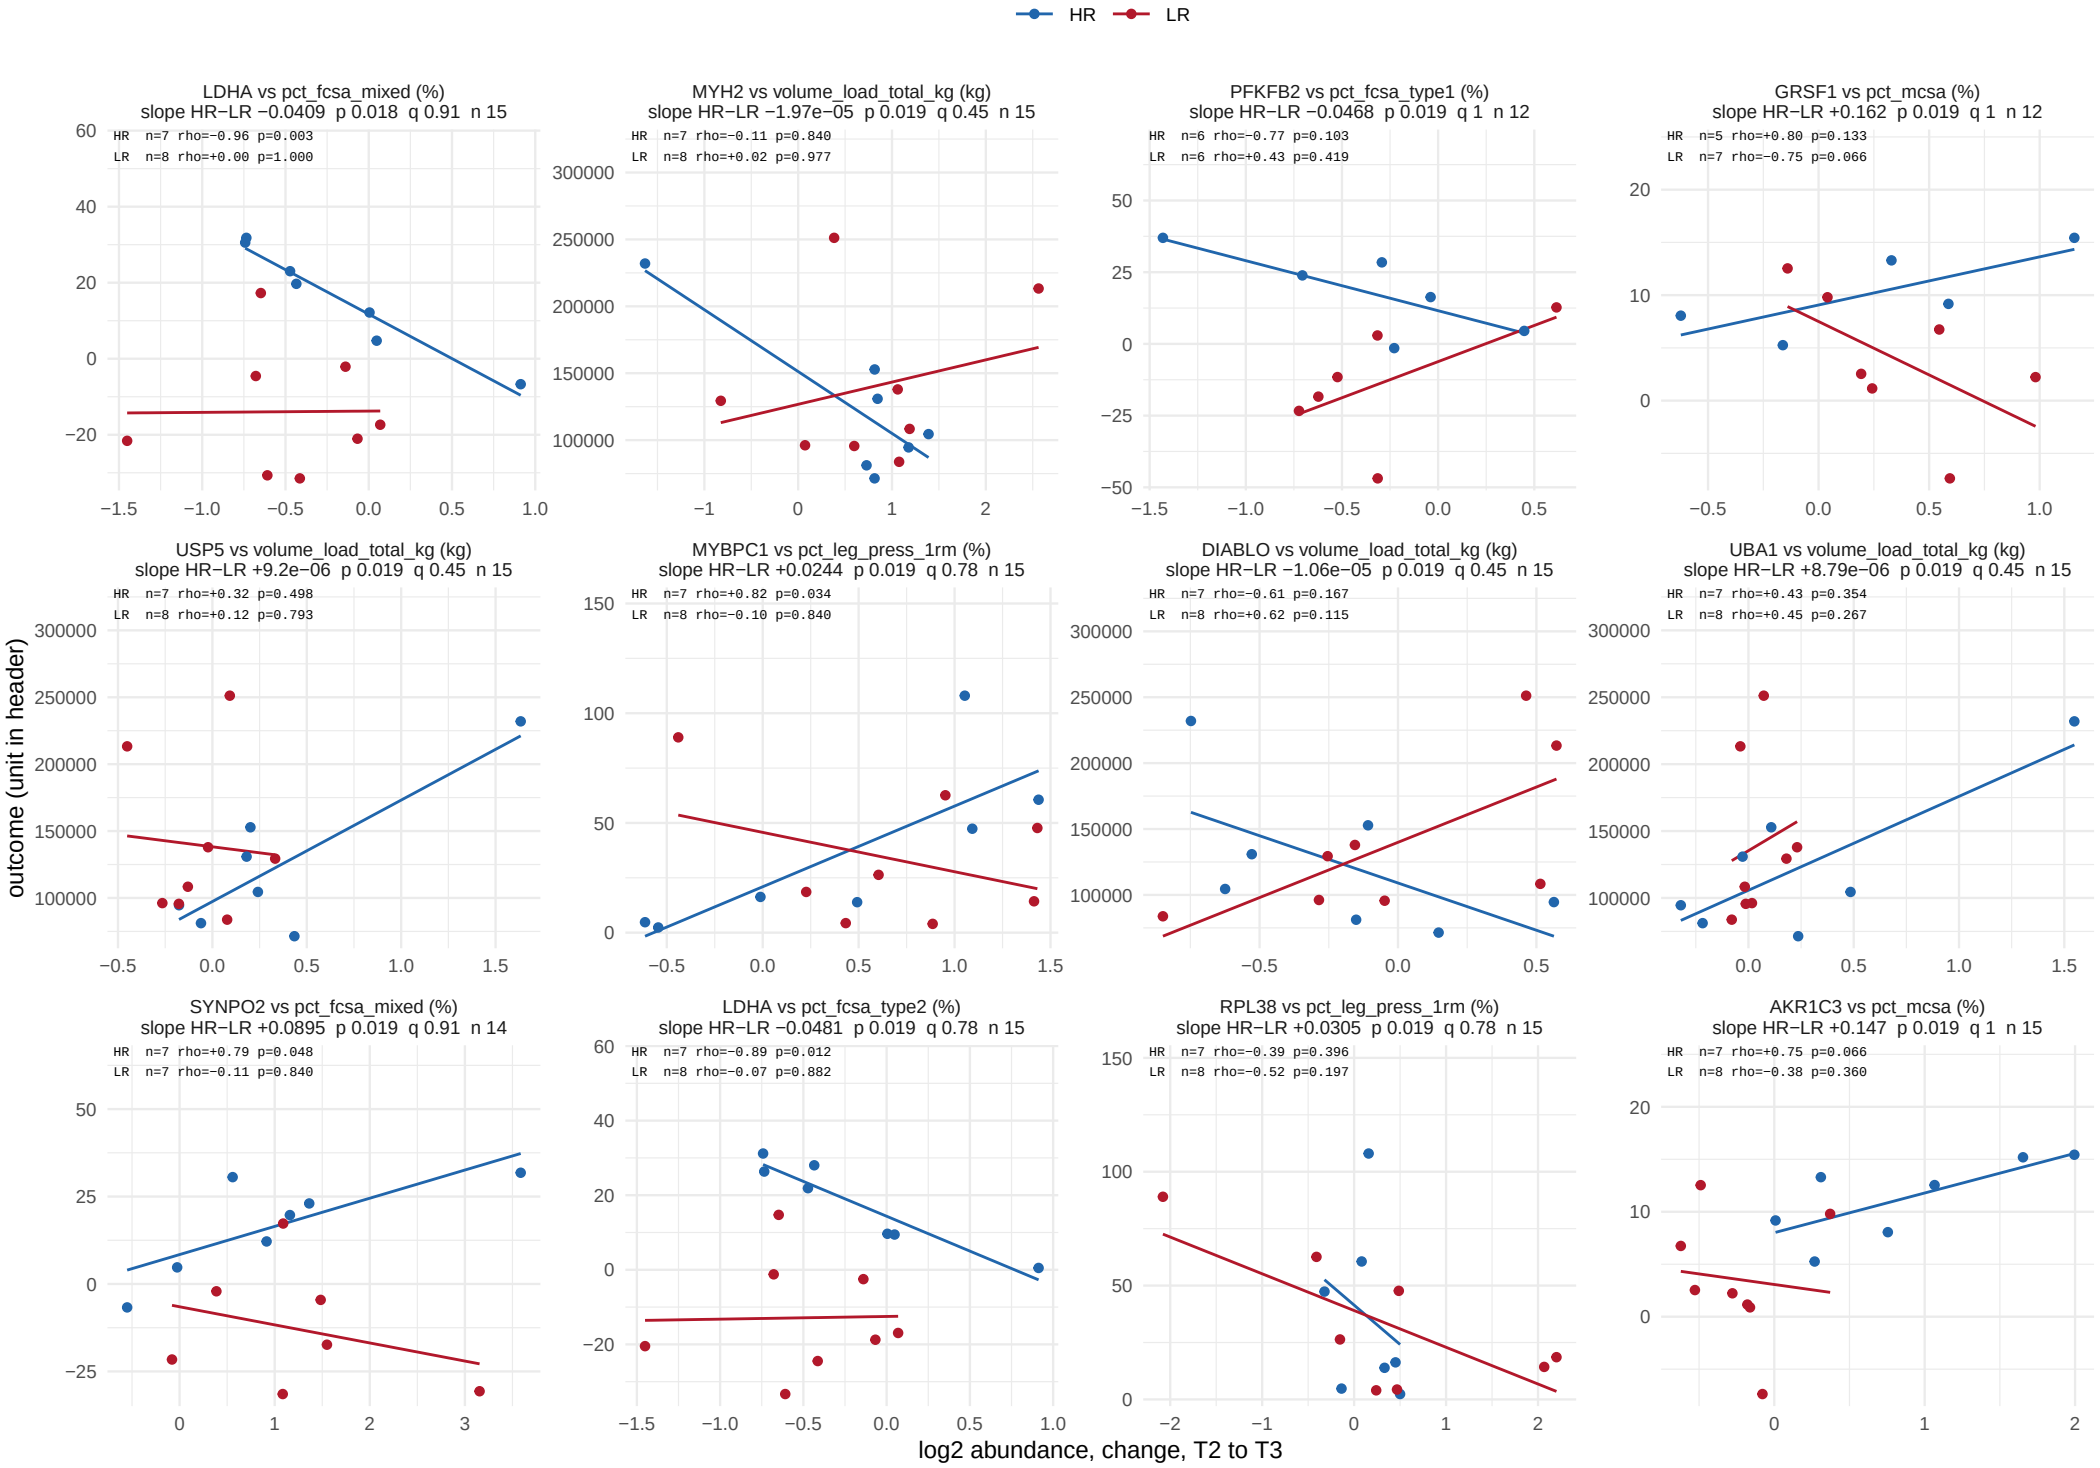

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


482 of 9765 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 16 of 41.

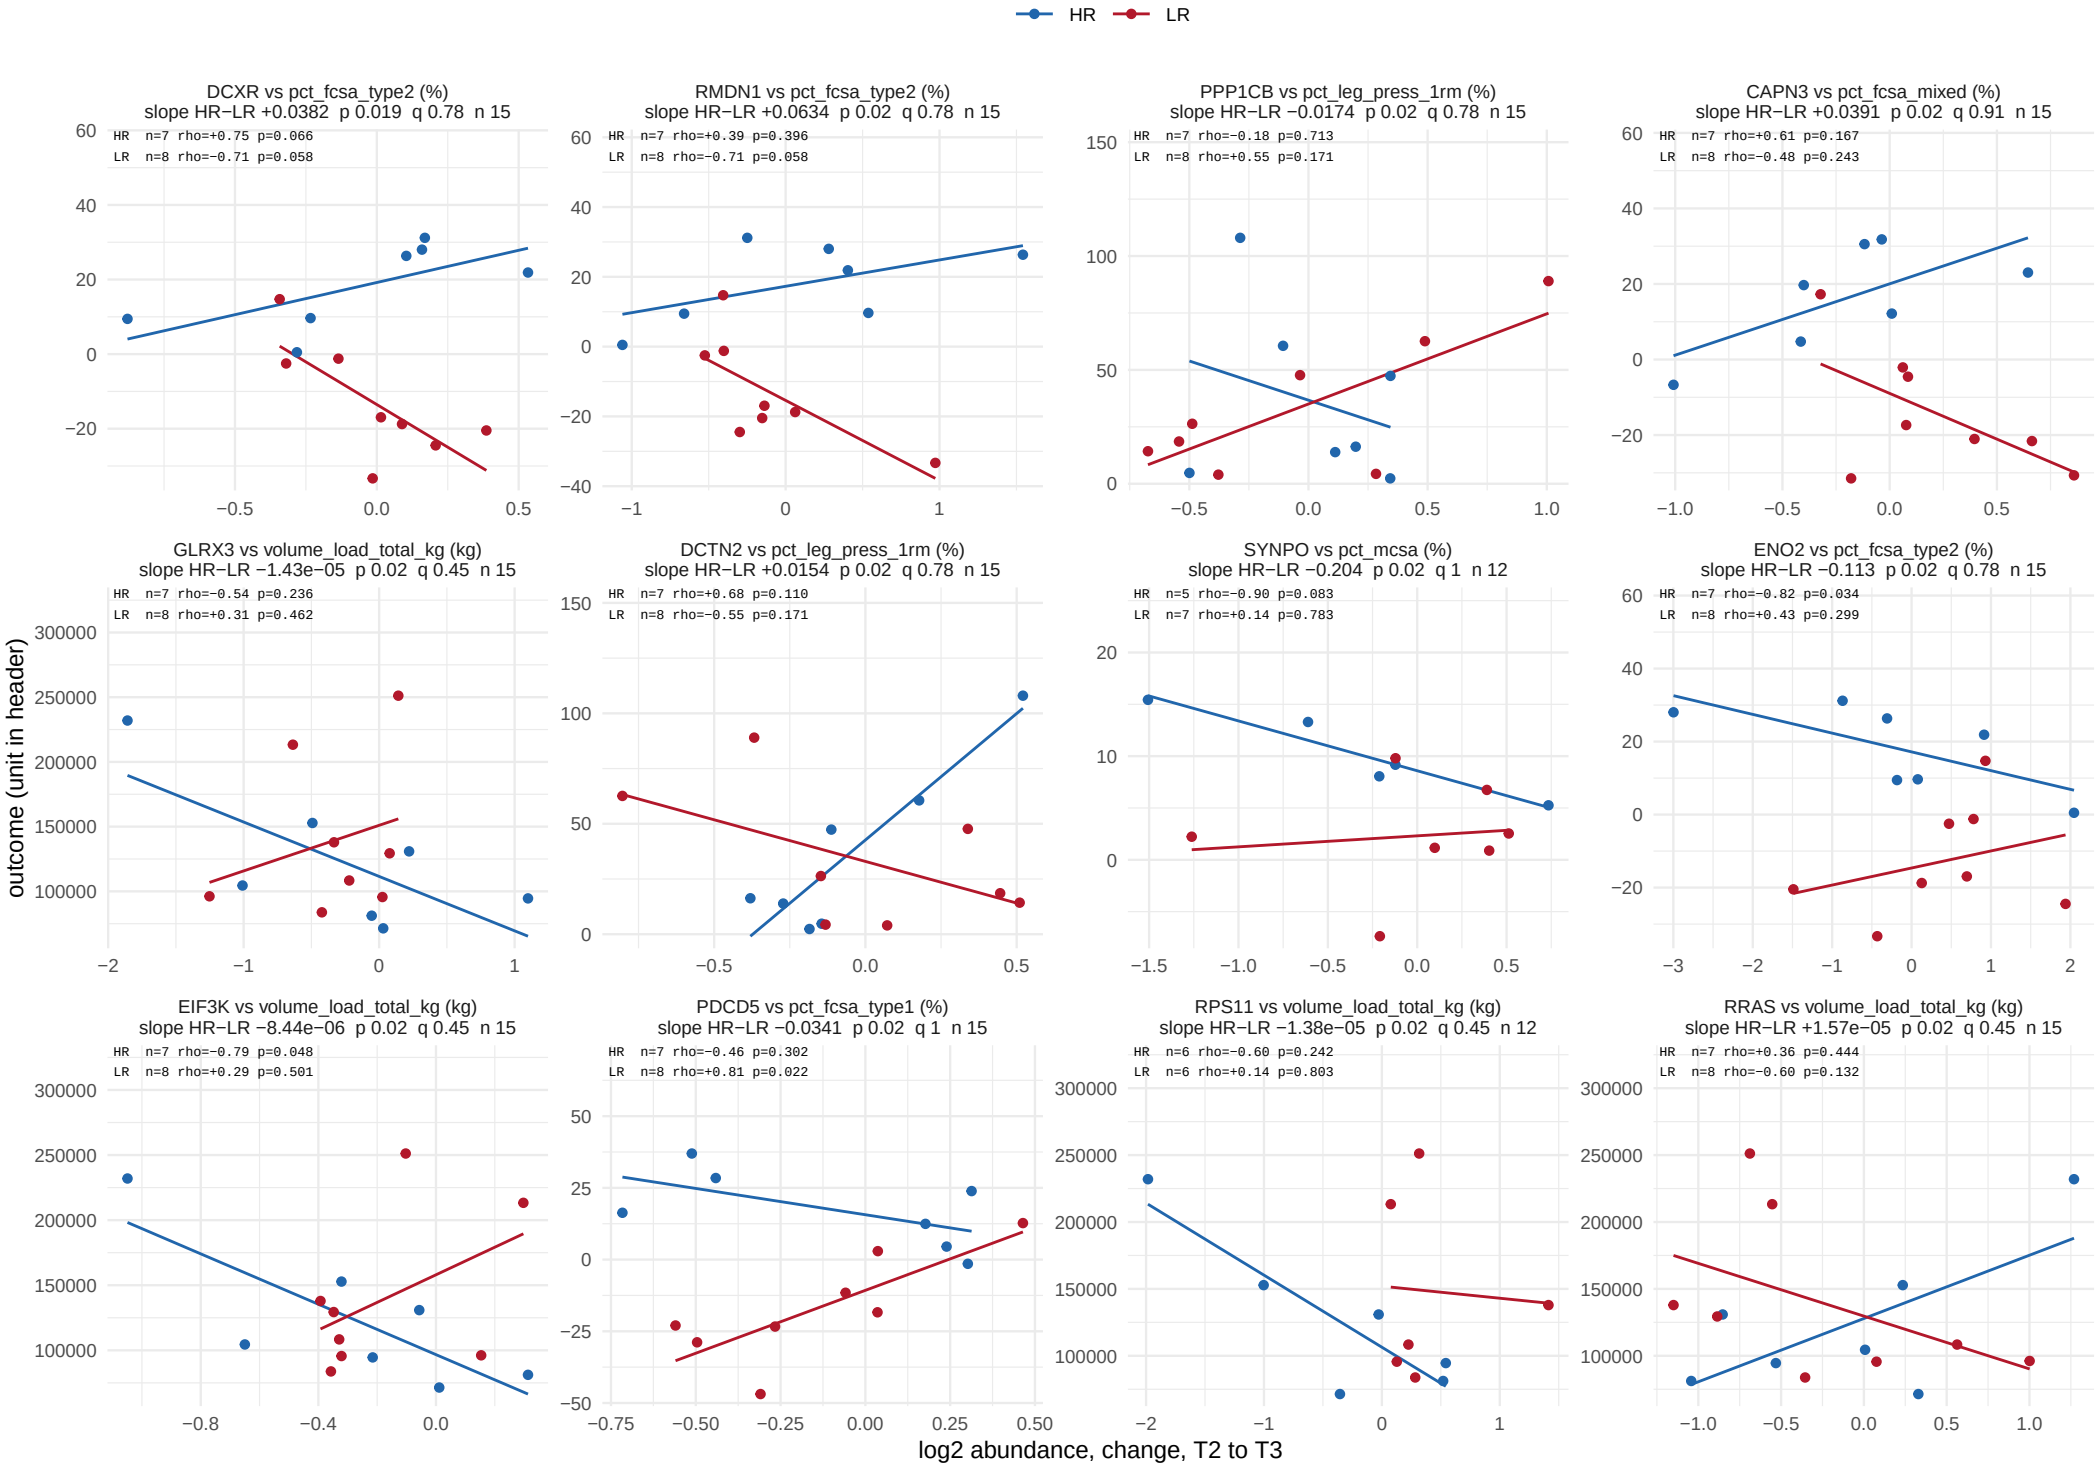

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


482 of 9765 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 17 of 41.

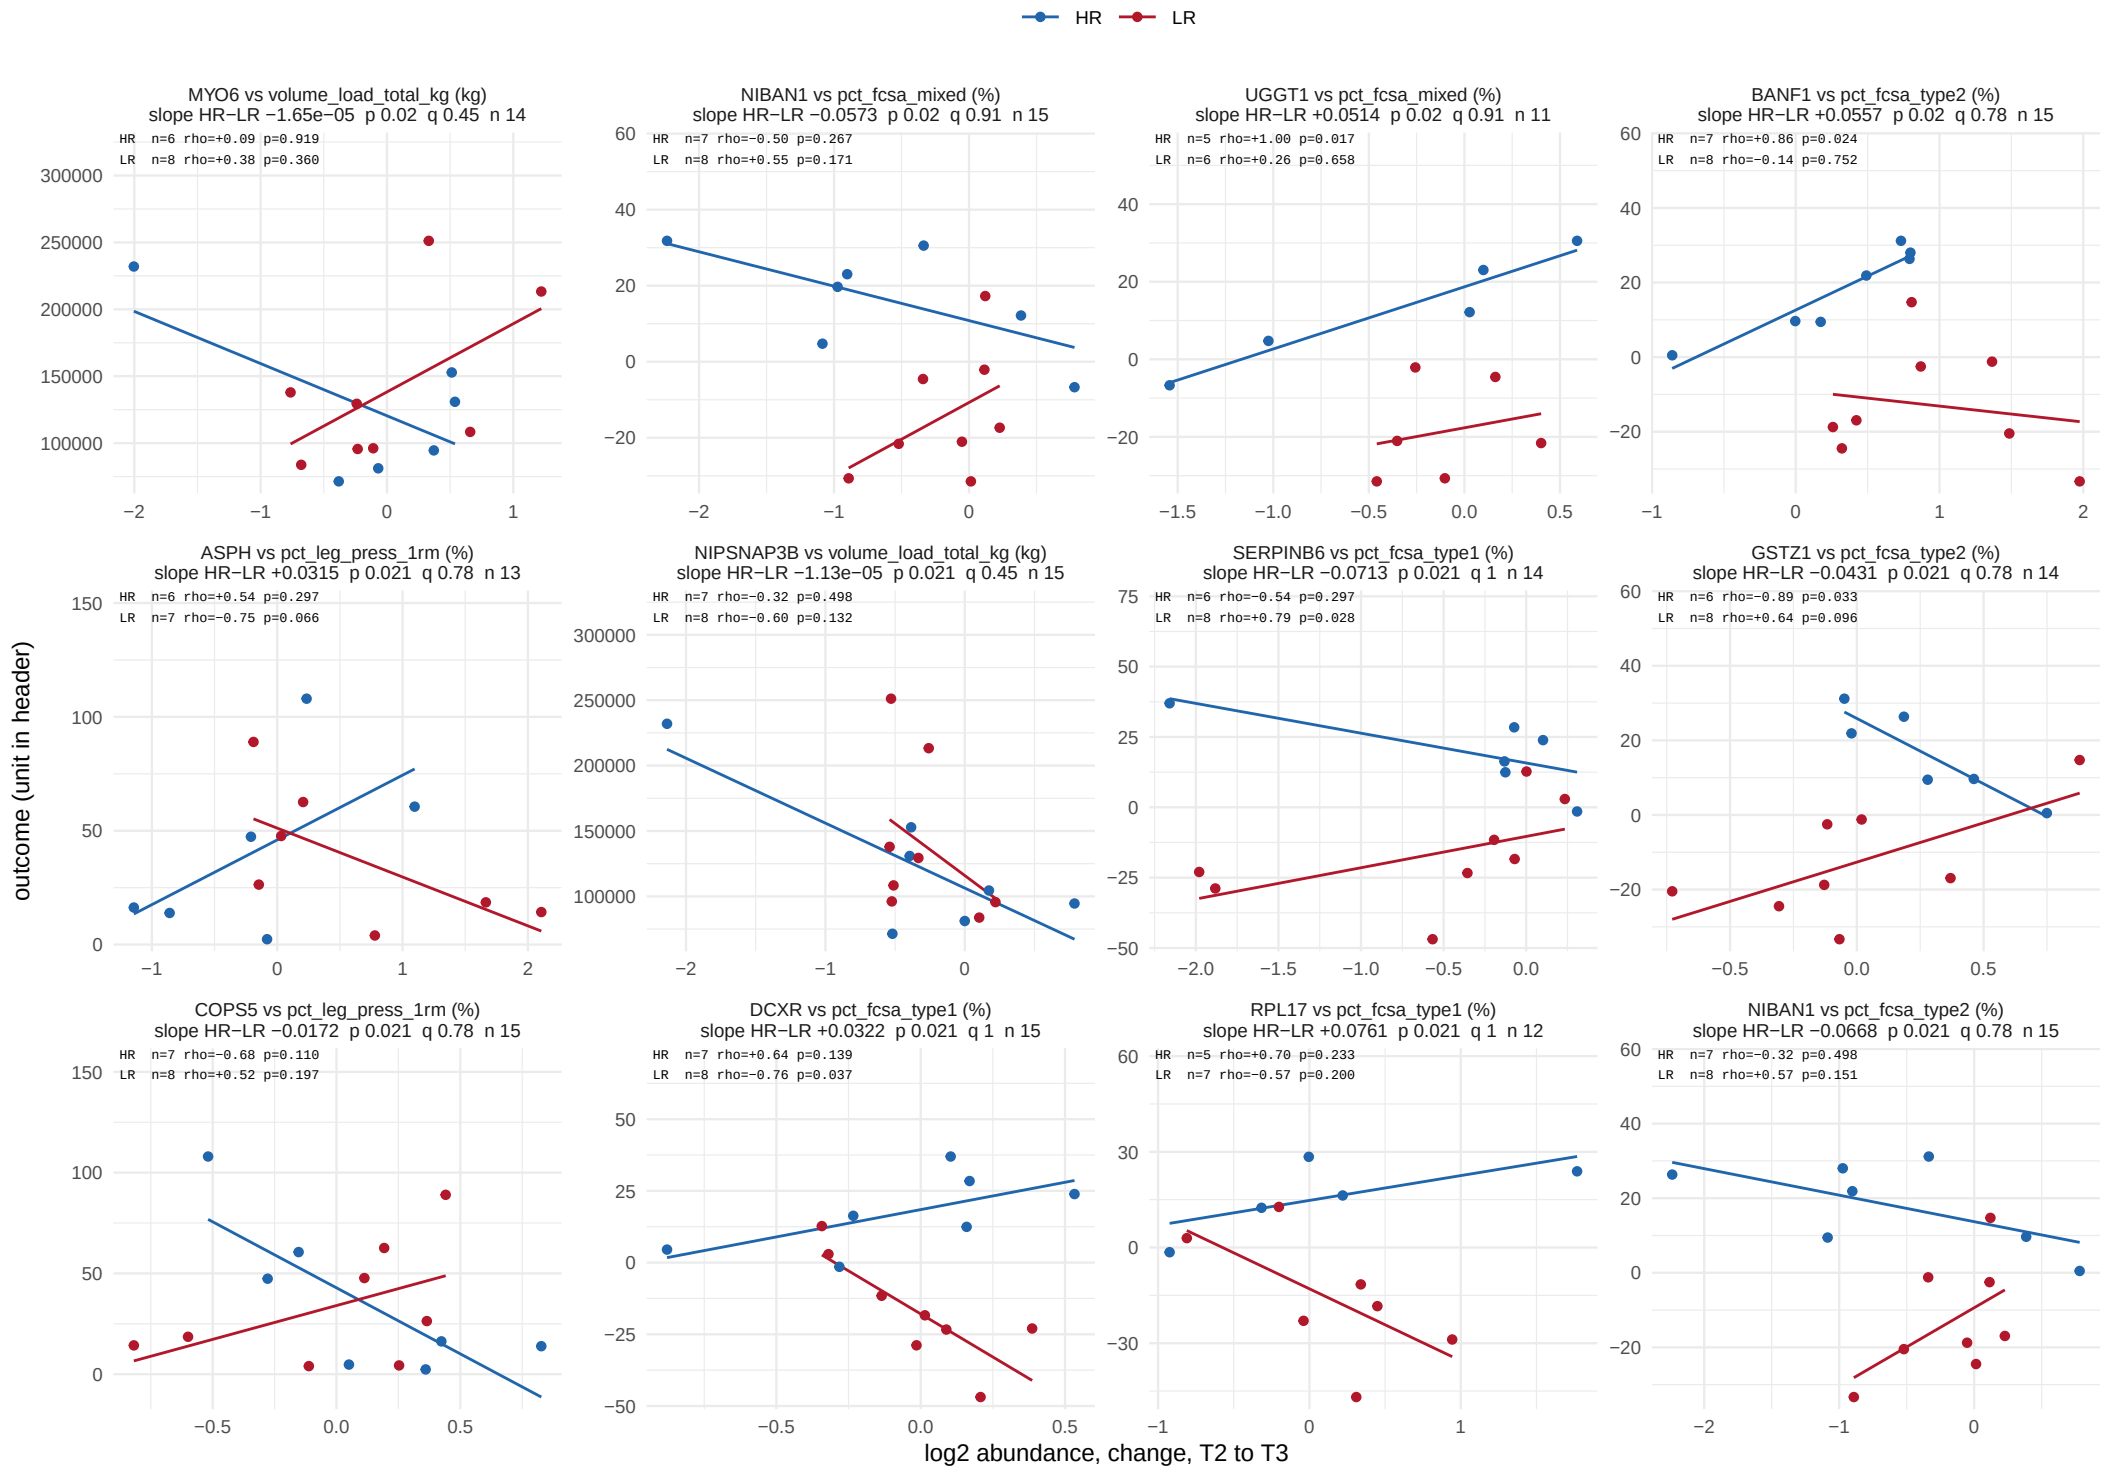

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


482 of 9765 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 18 of 41.

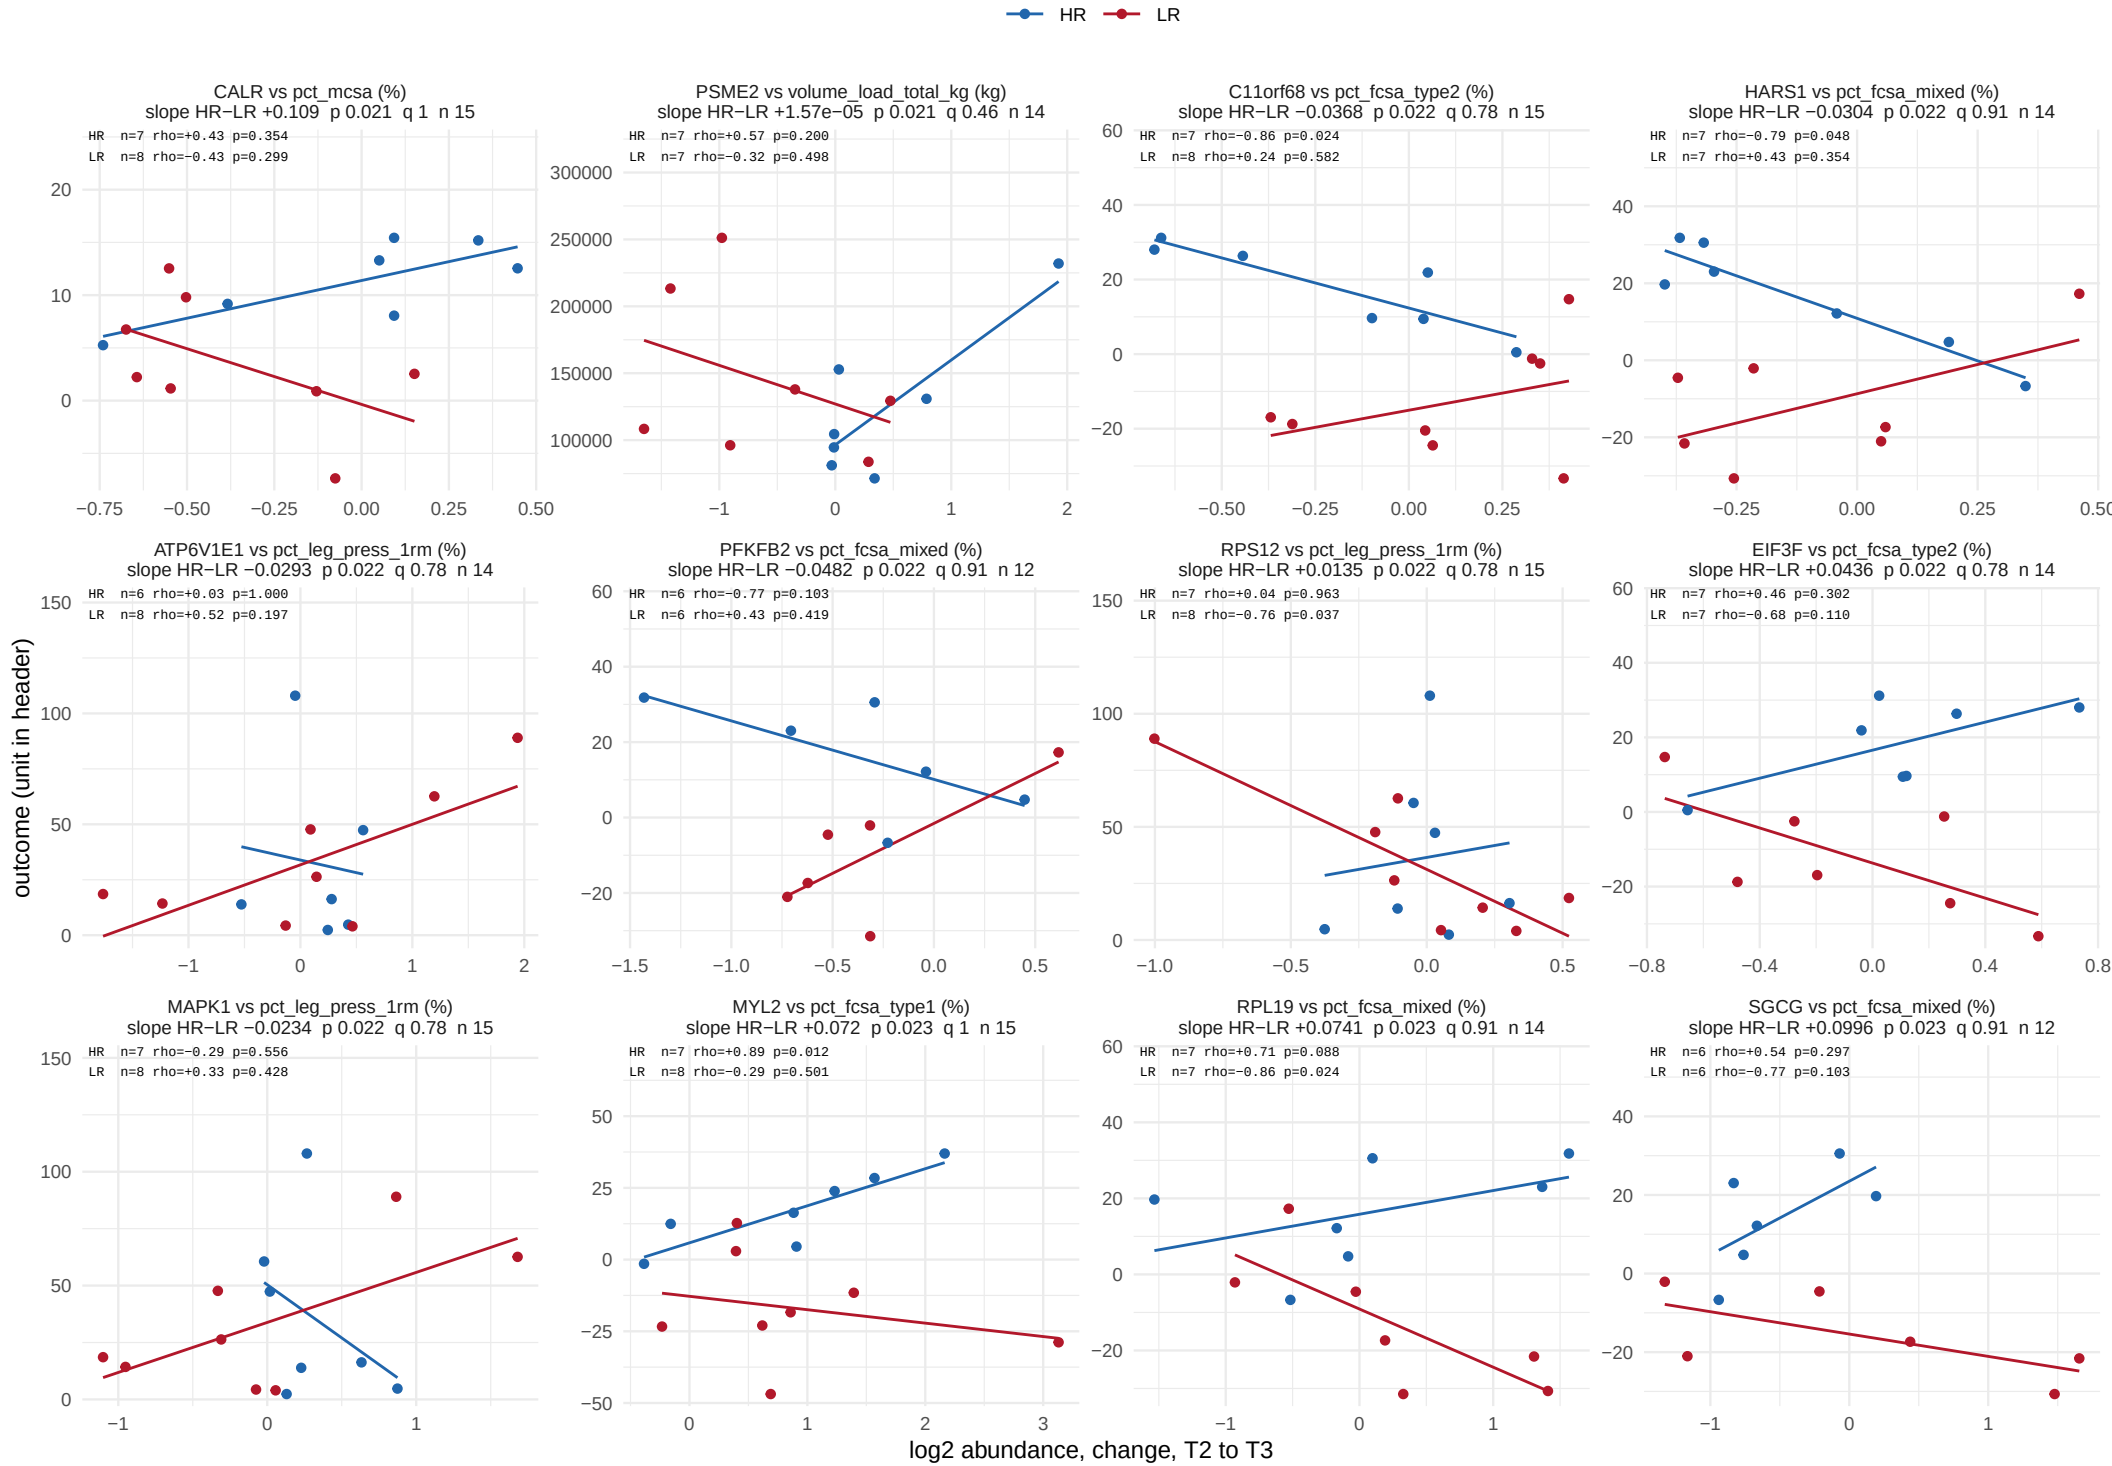

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


482 of 9765 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 19 of 41.

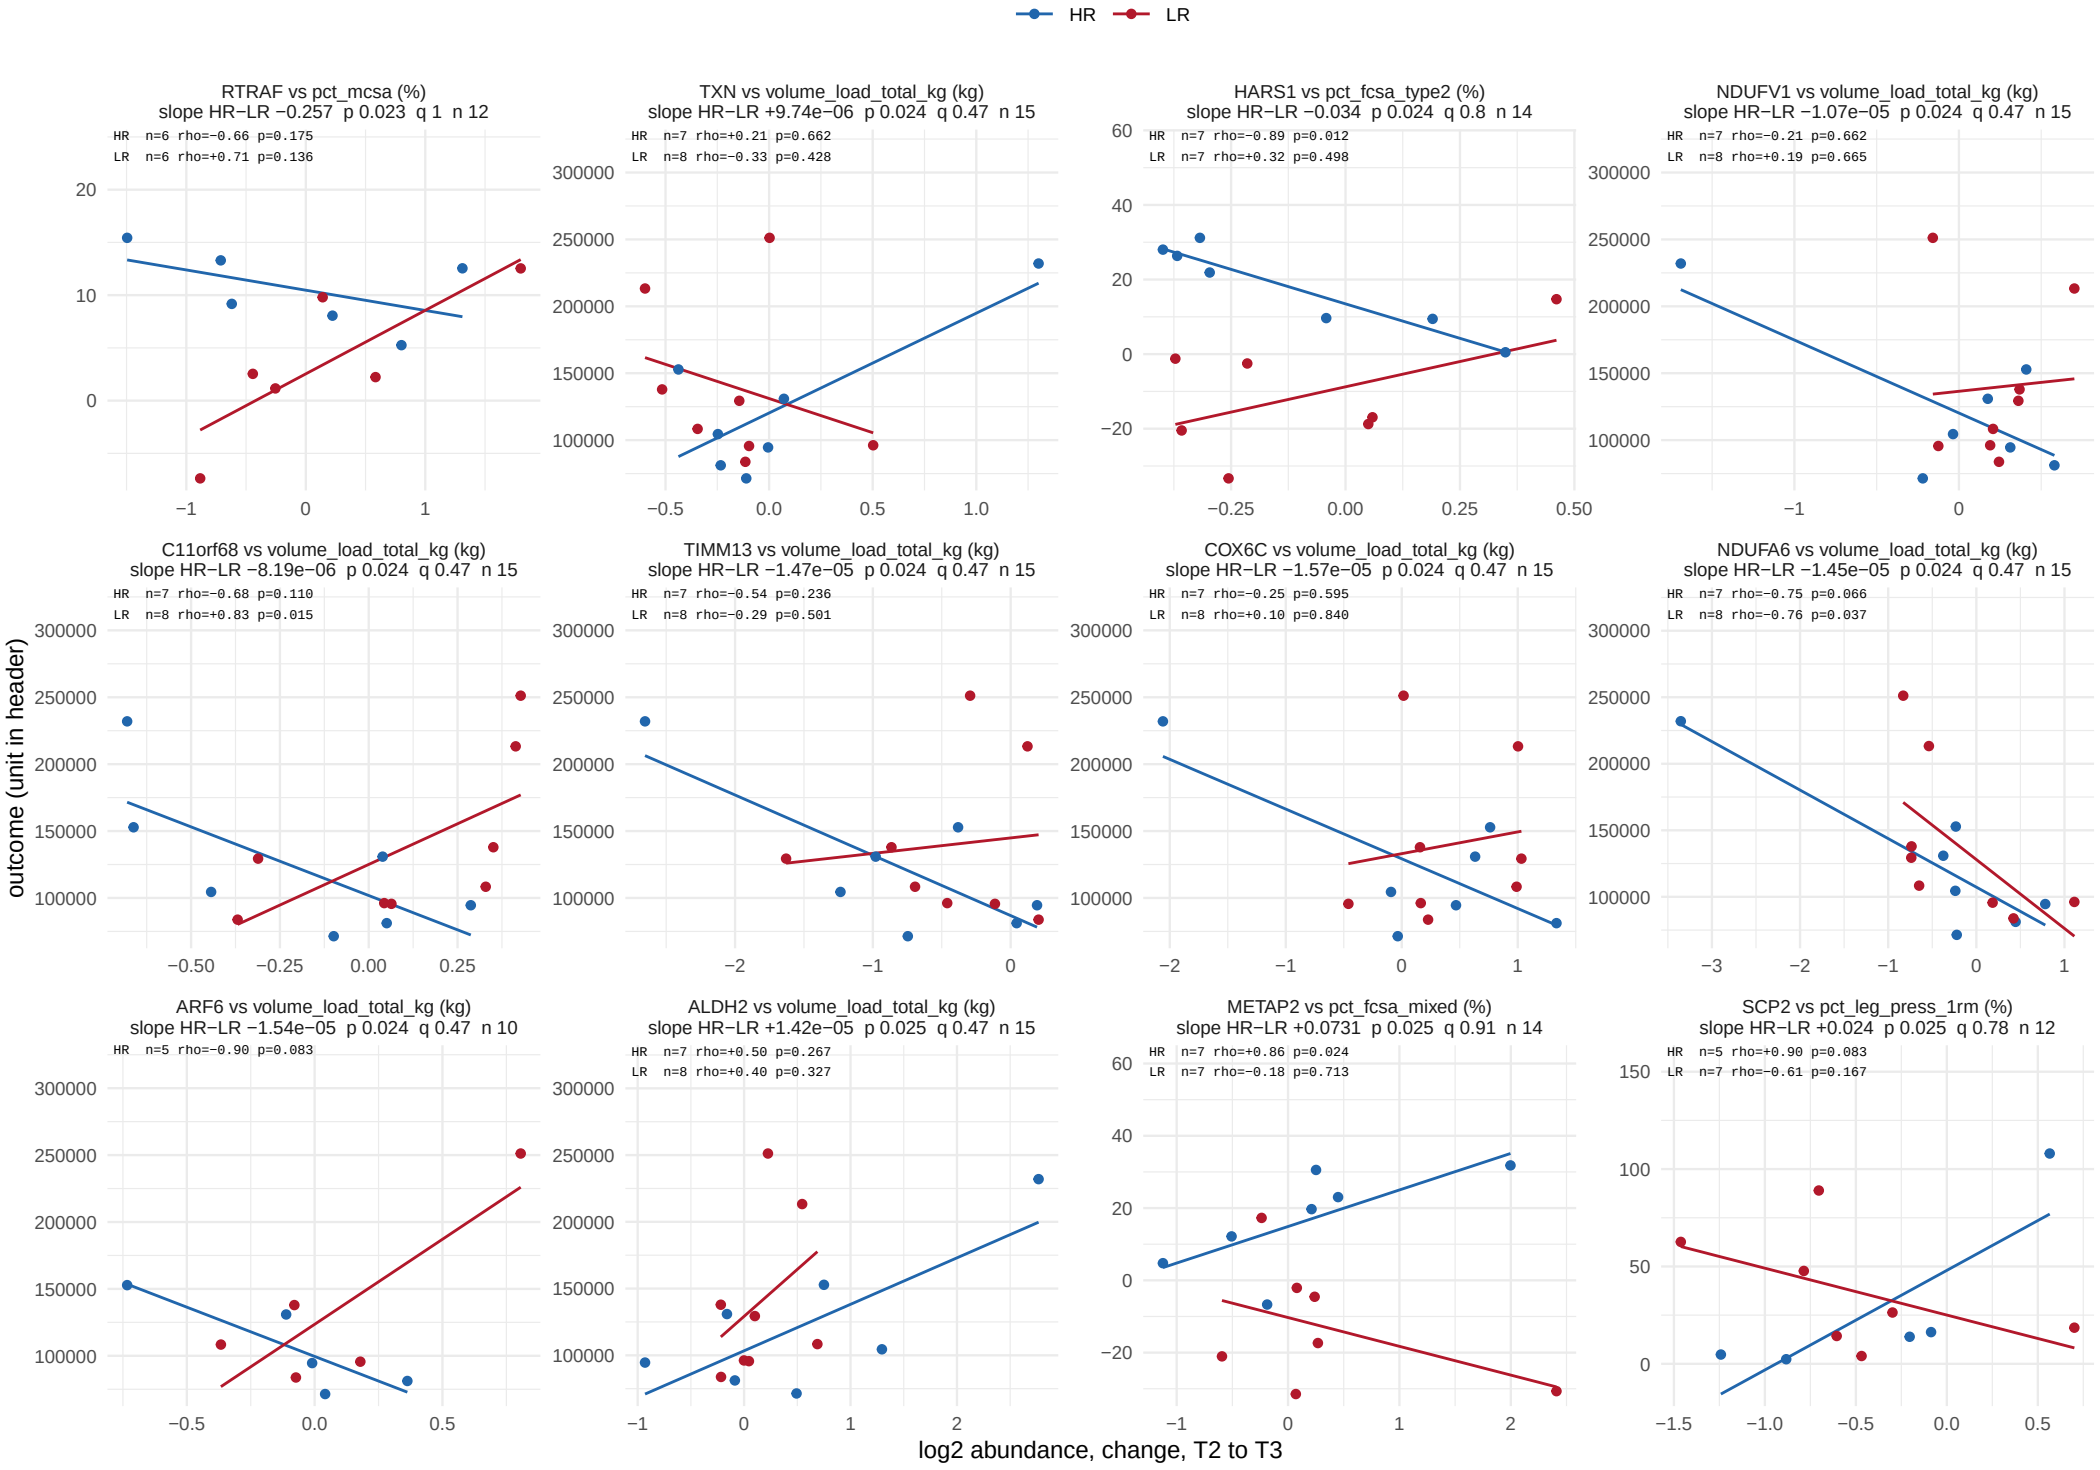

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


482 of 9765 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 20 of 41.

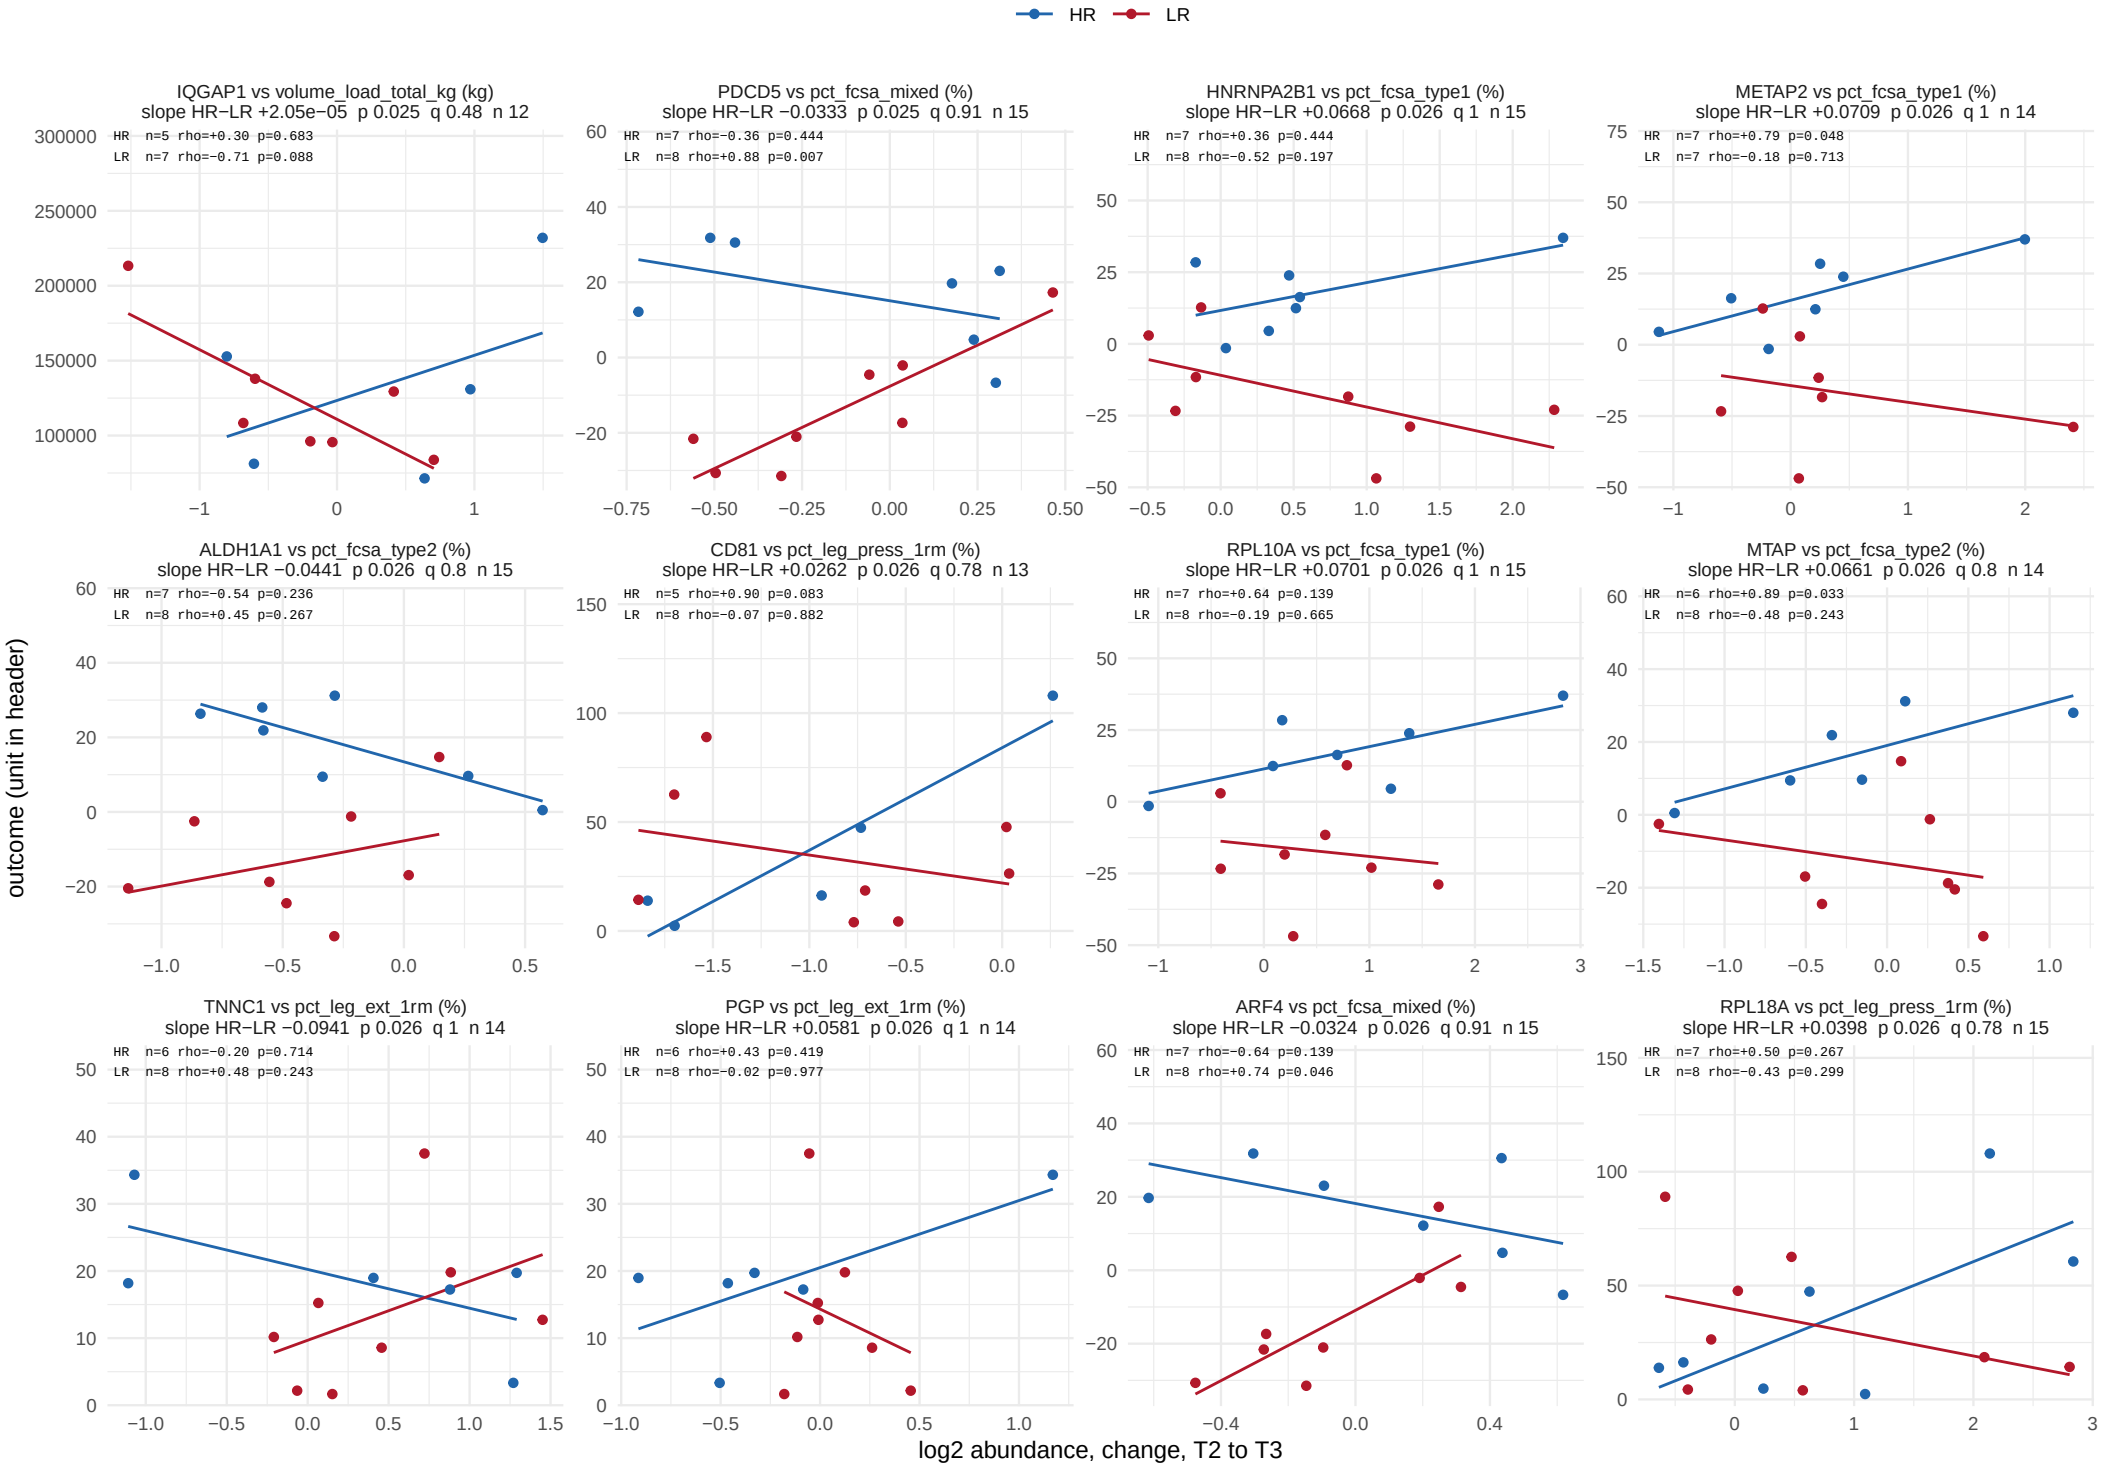

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


482 of 9765 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 21 of 41.

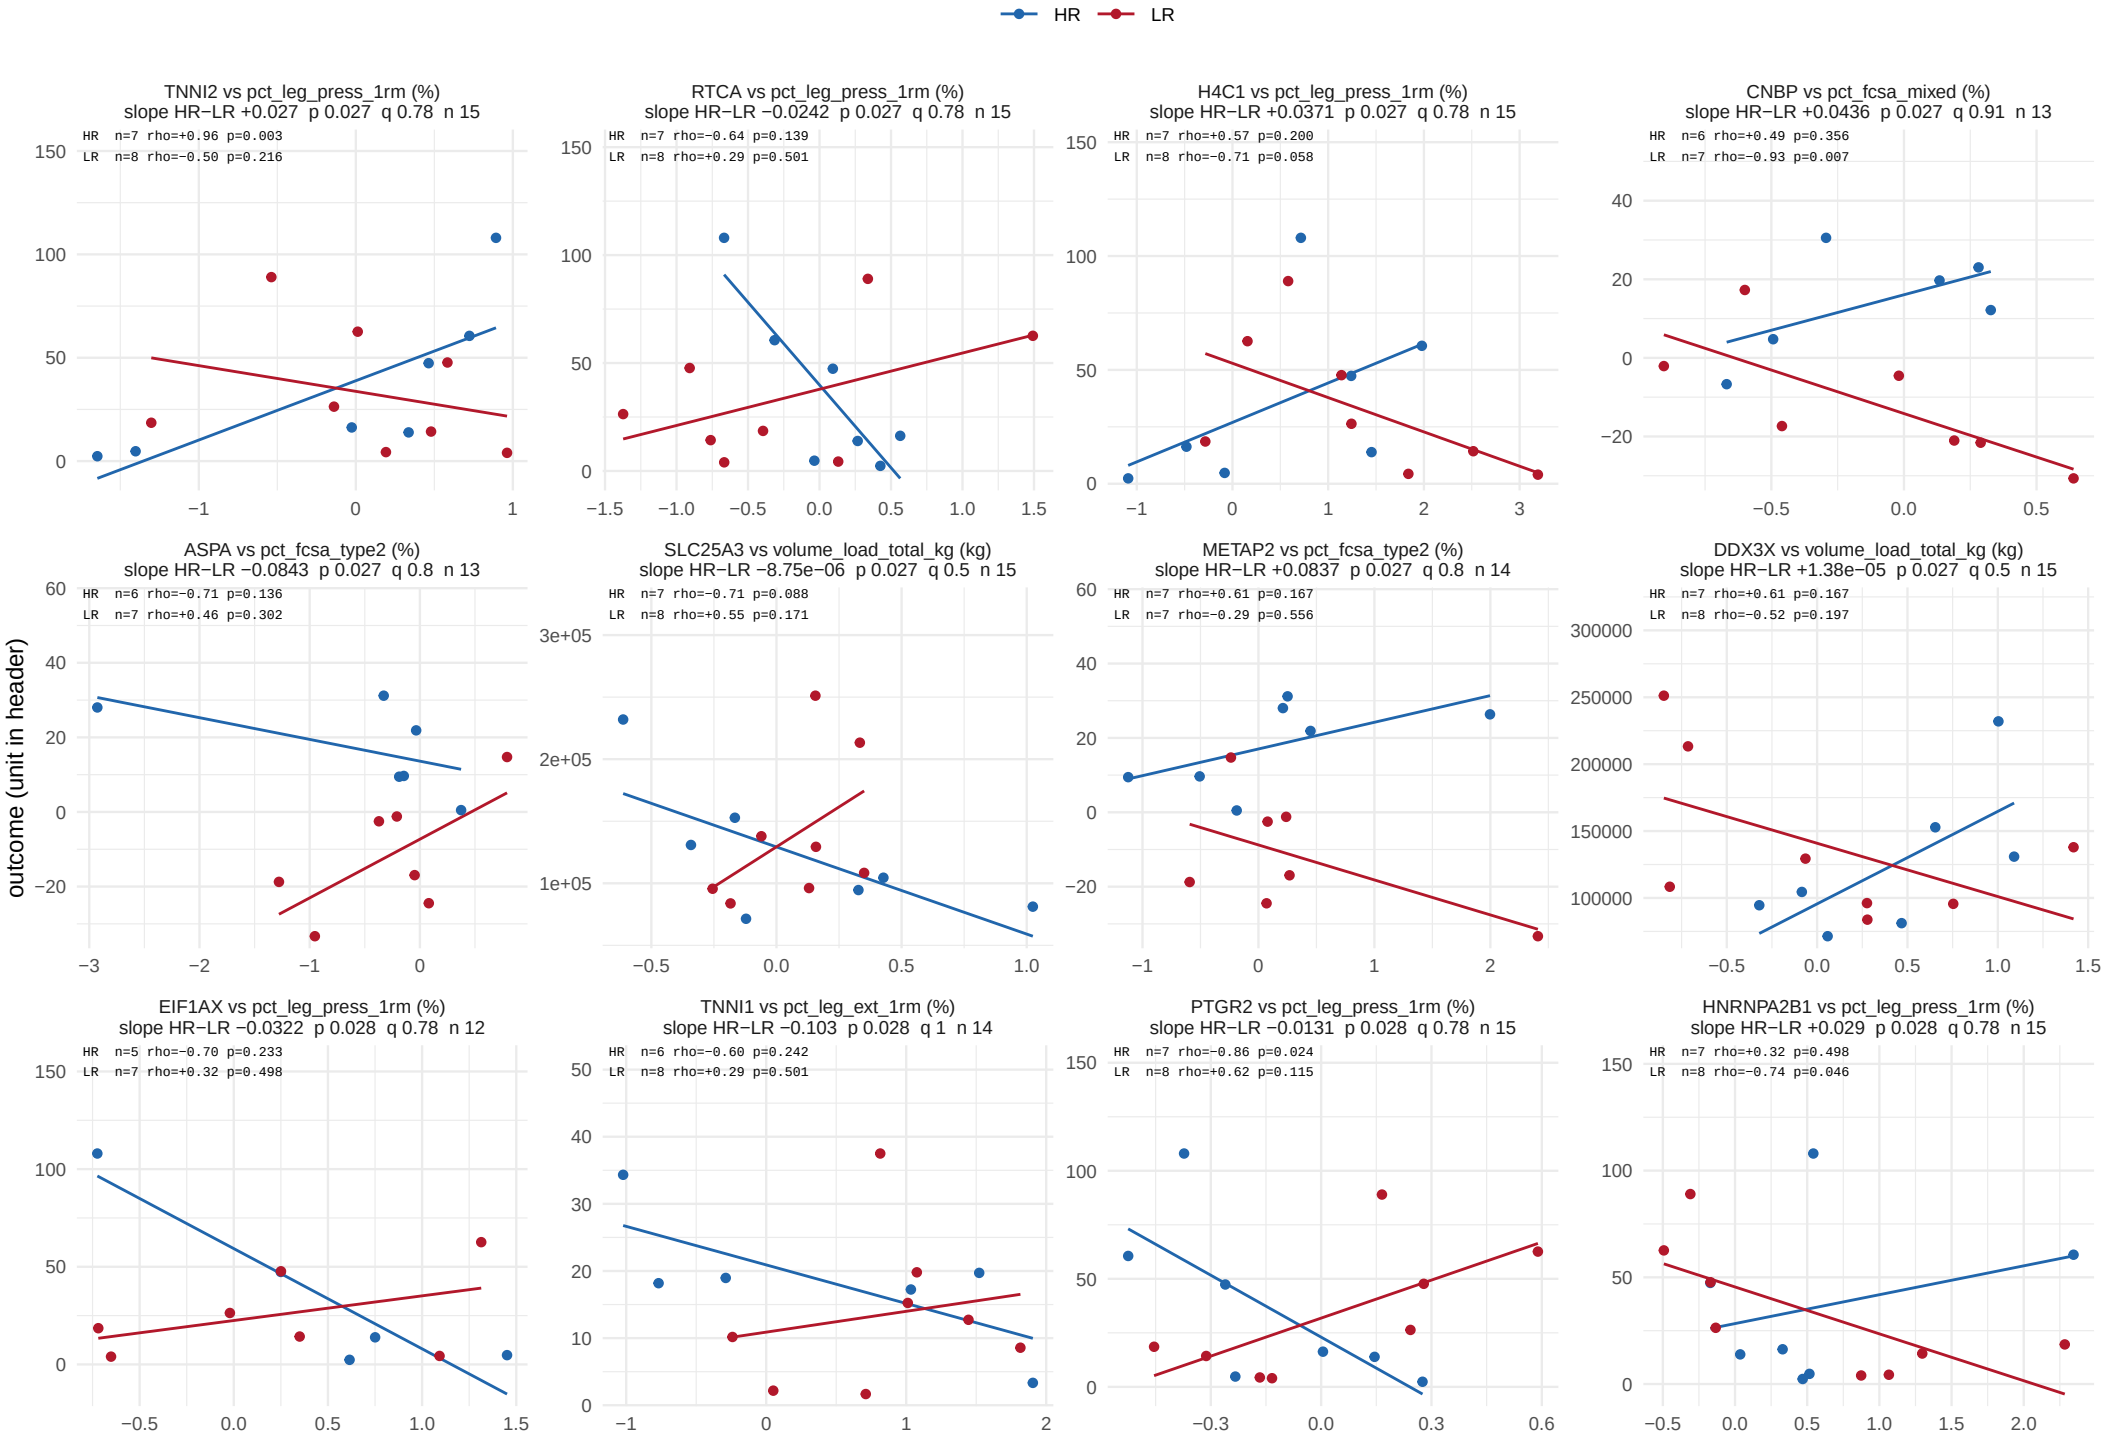

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


482 of 9765 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 22 of 41.

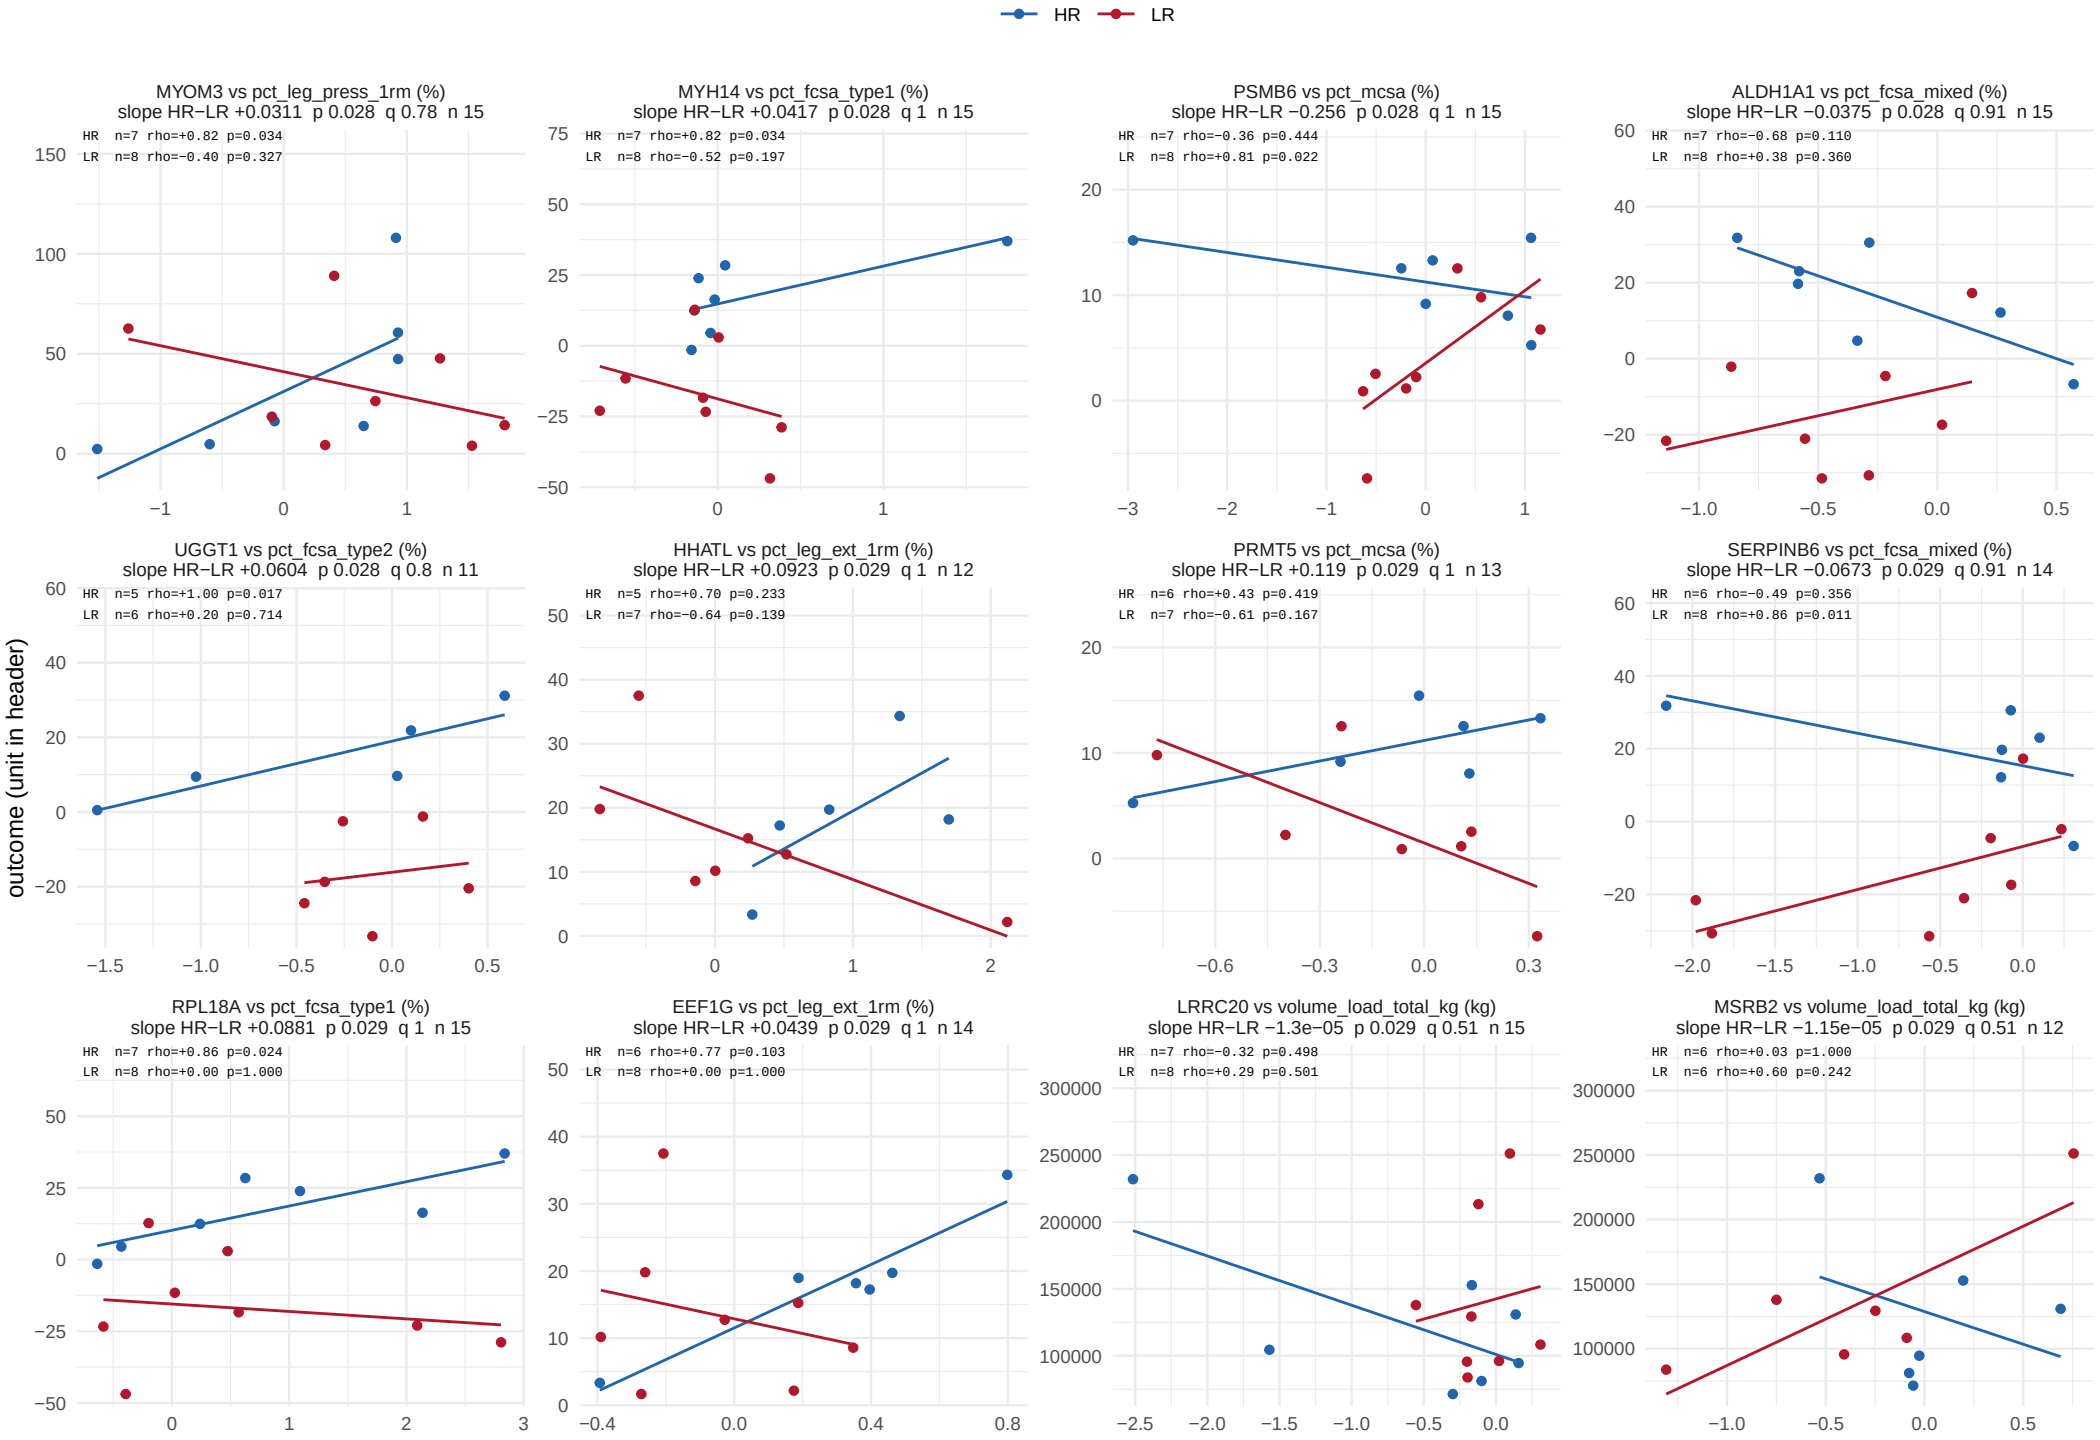

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


482 of 9765 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 23 of 41.

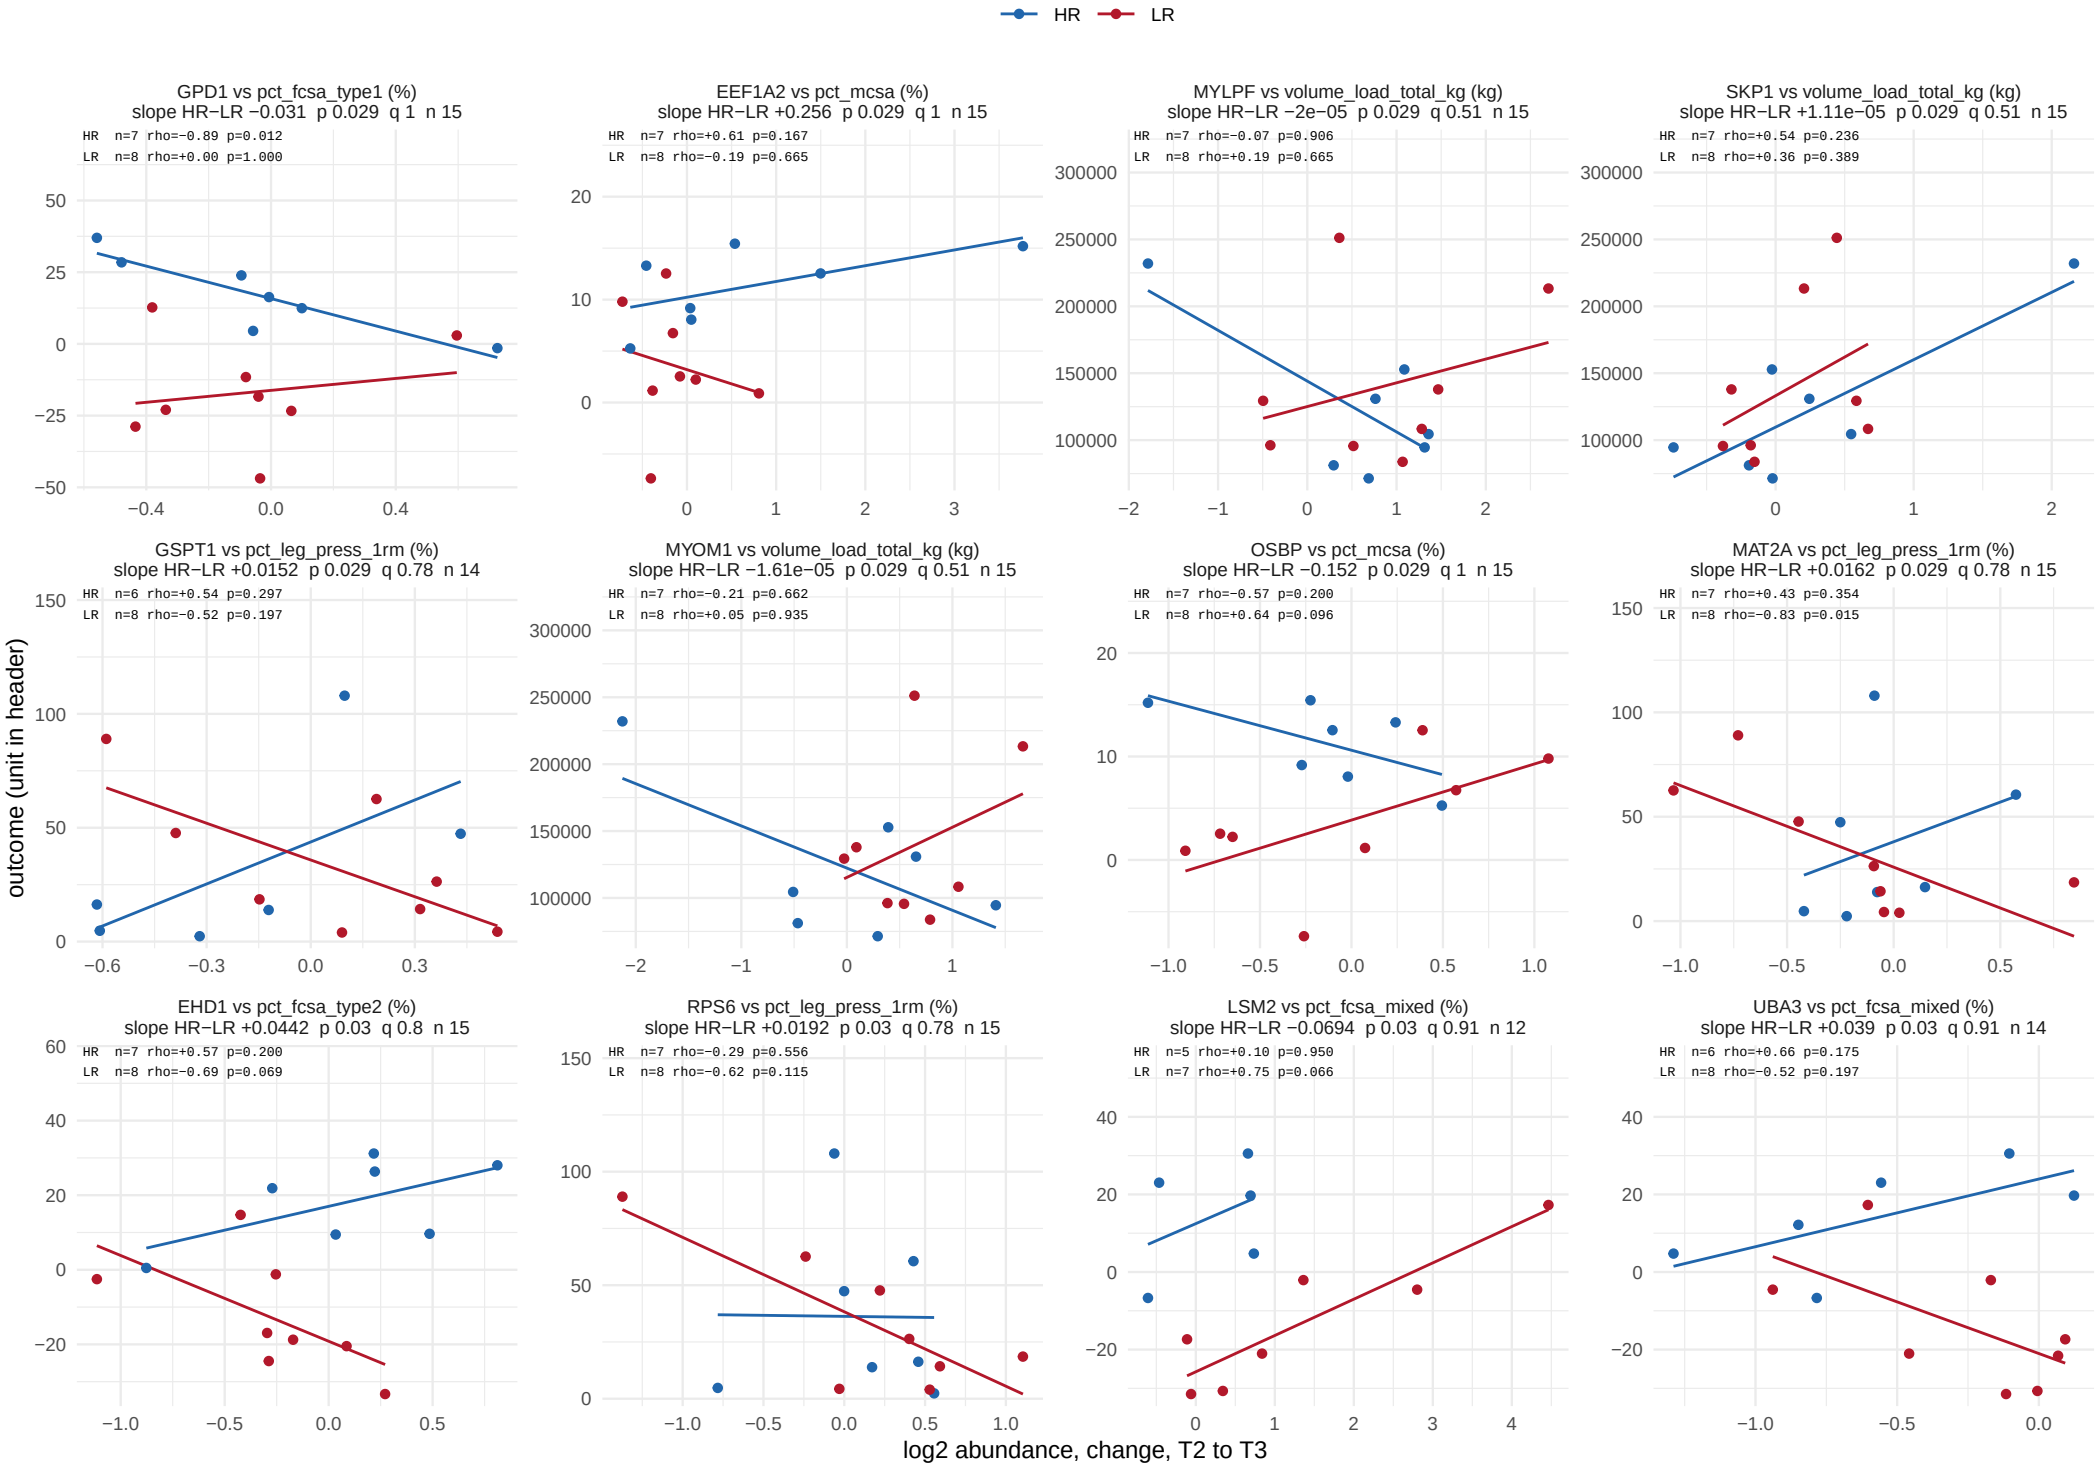

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


482 of 9765 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 24 of 41.

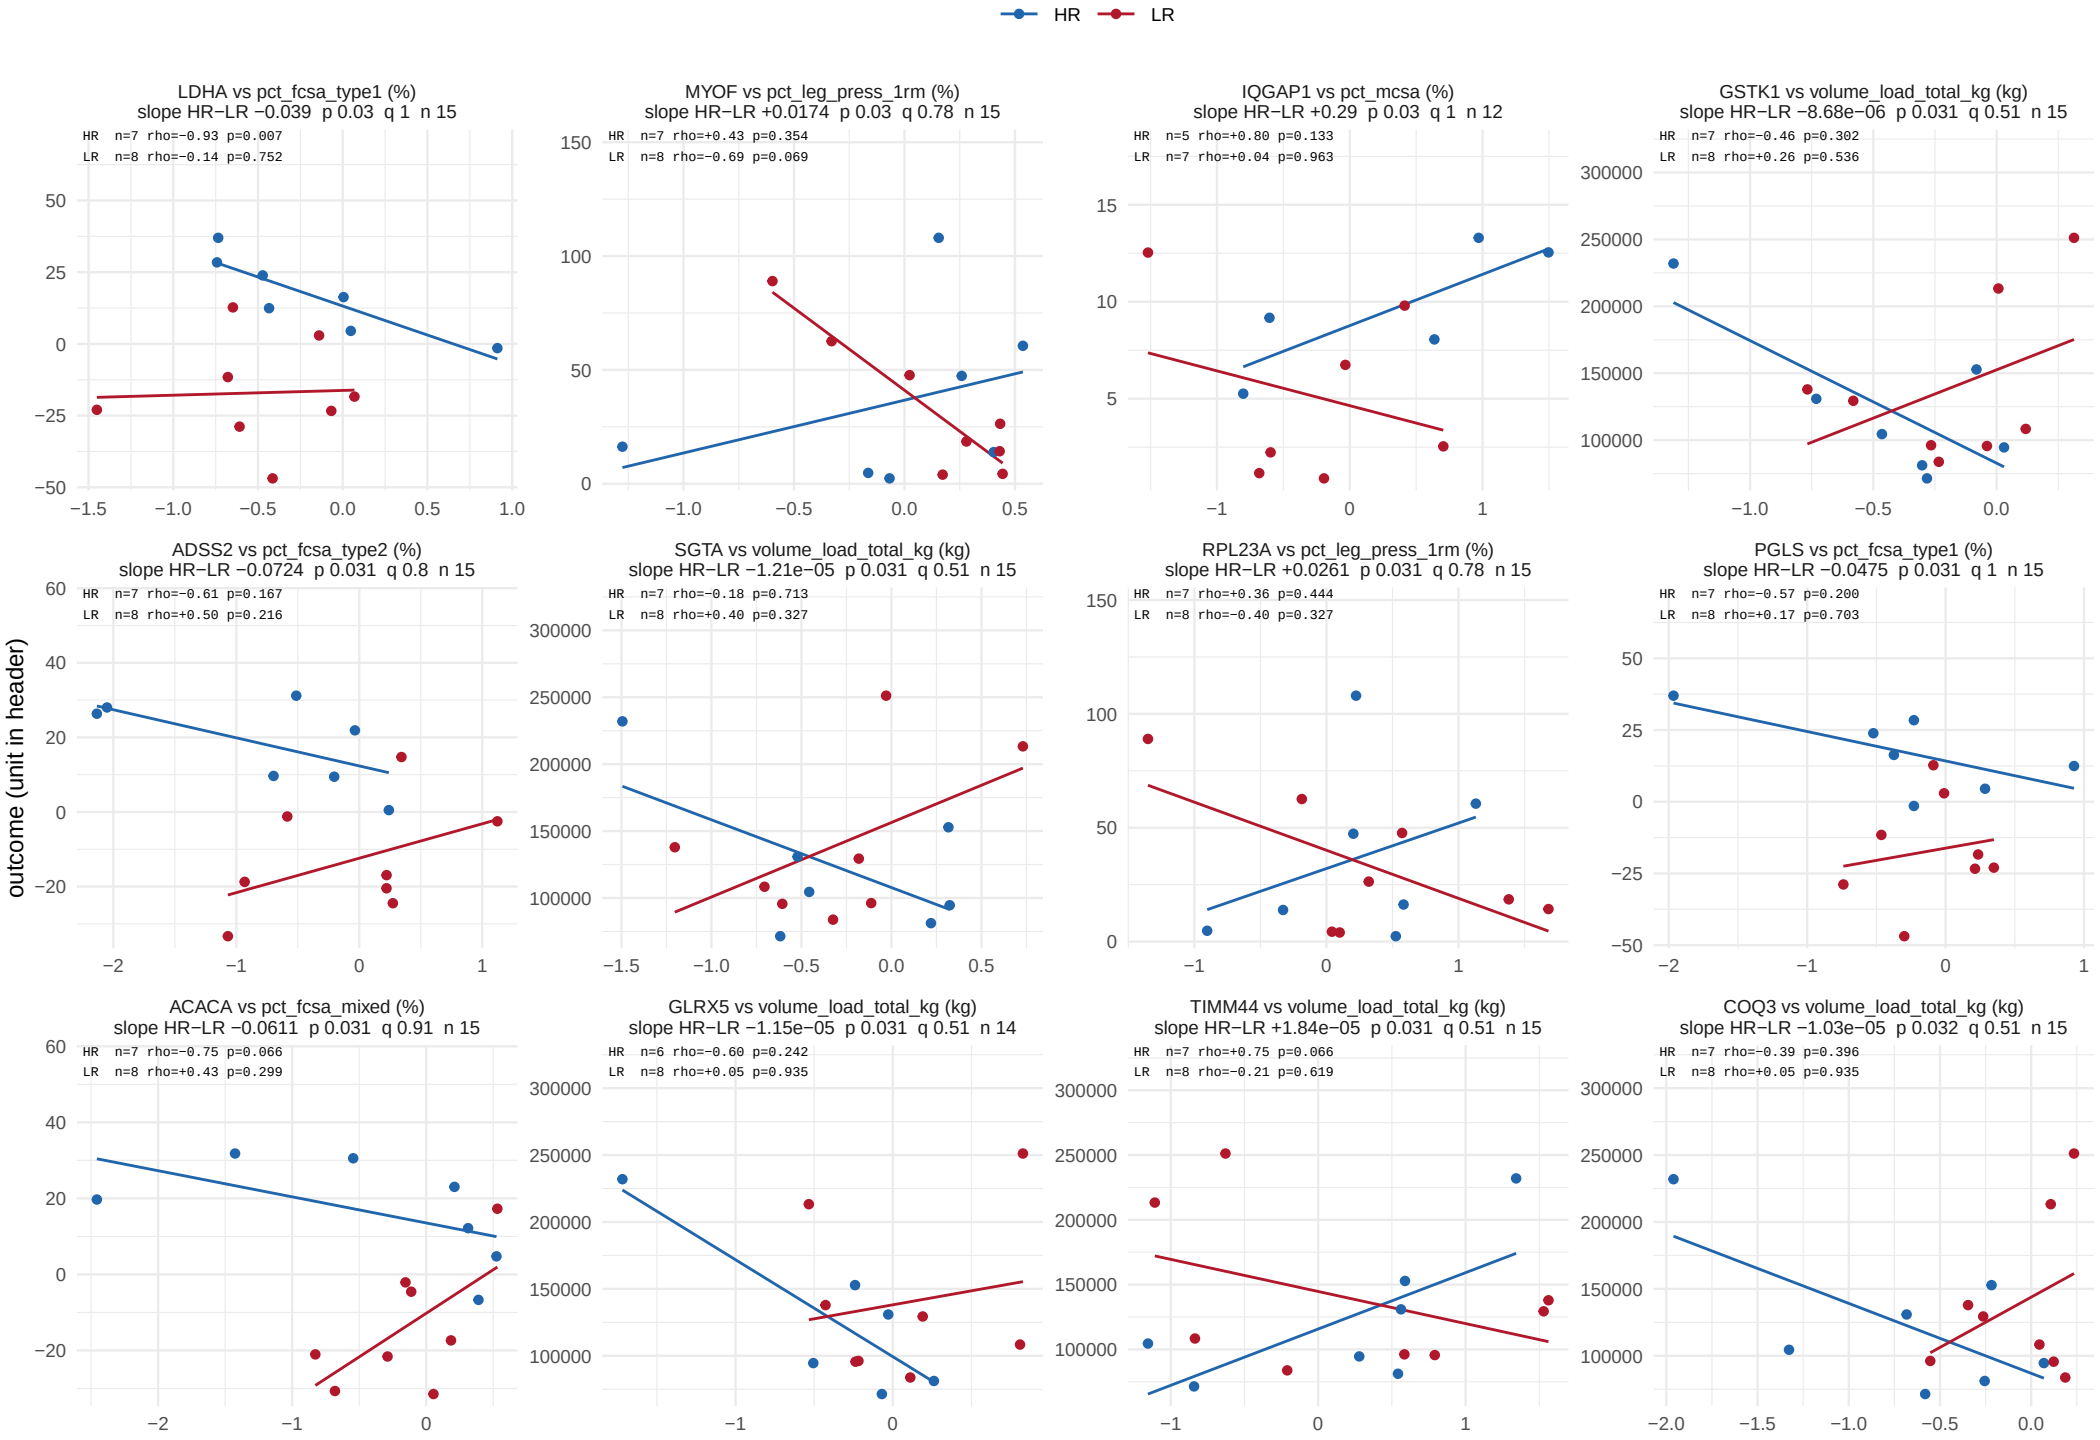

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


482 of 9765 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 25 of 41.

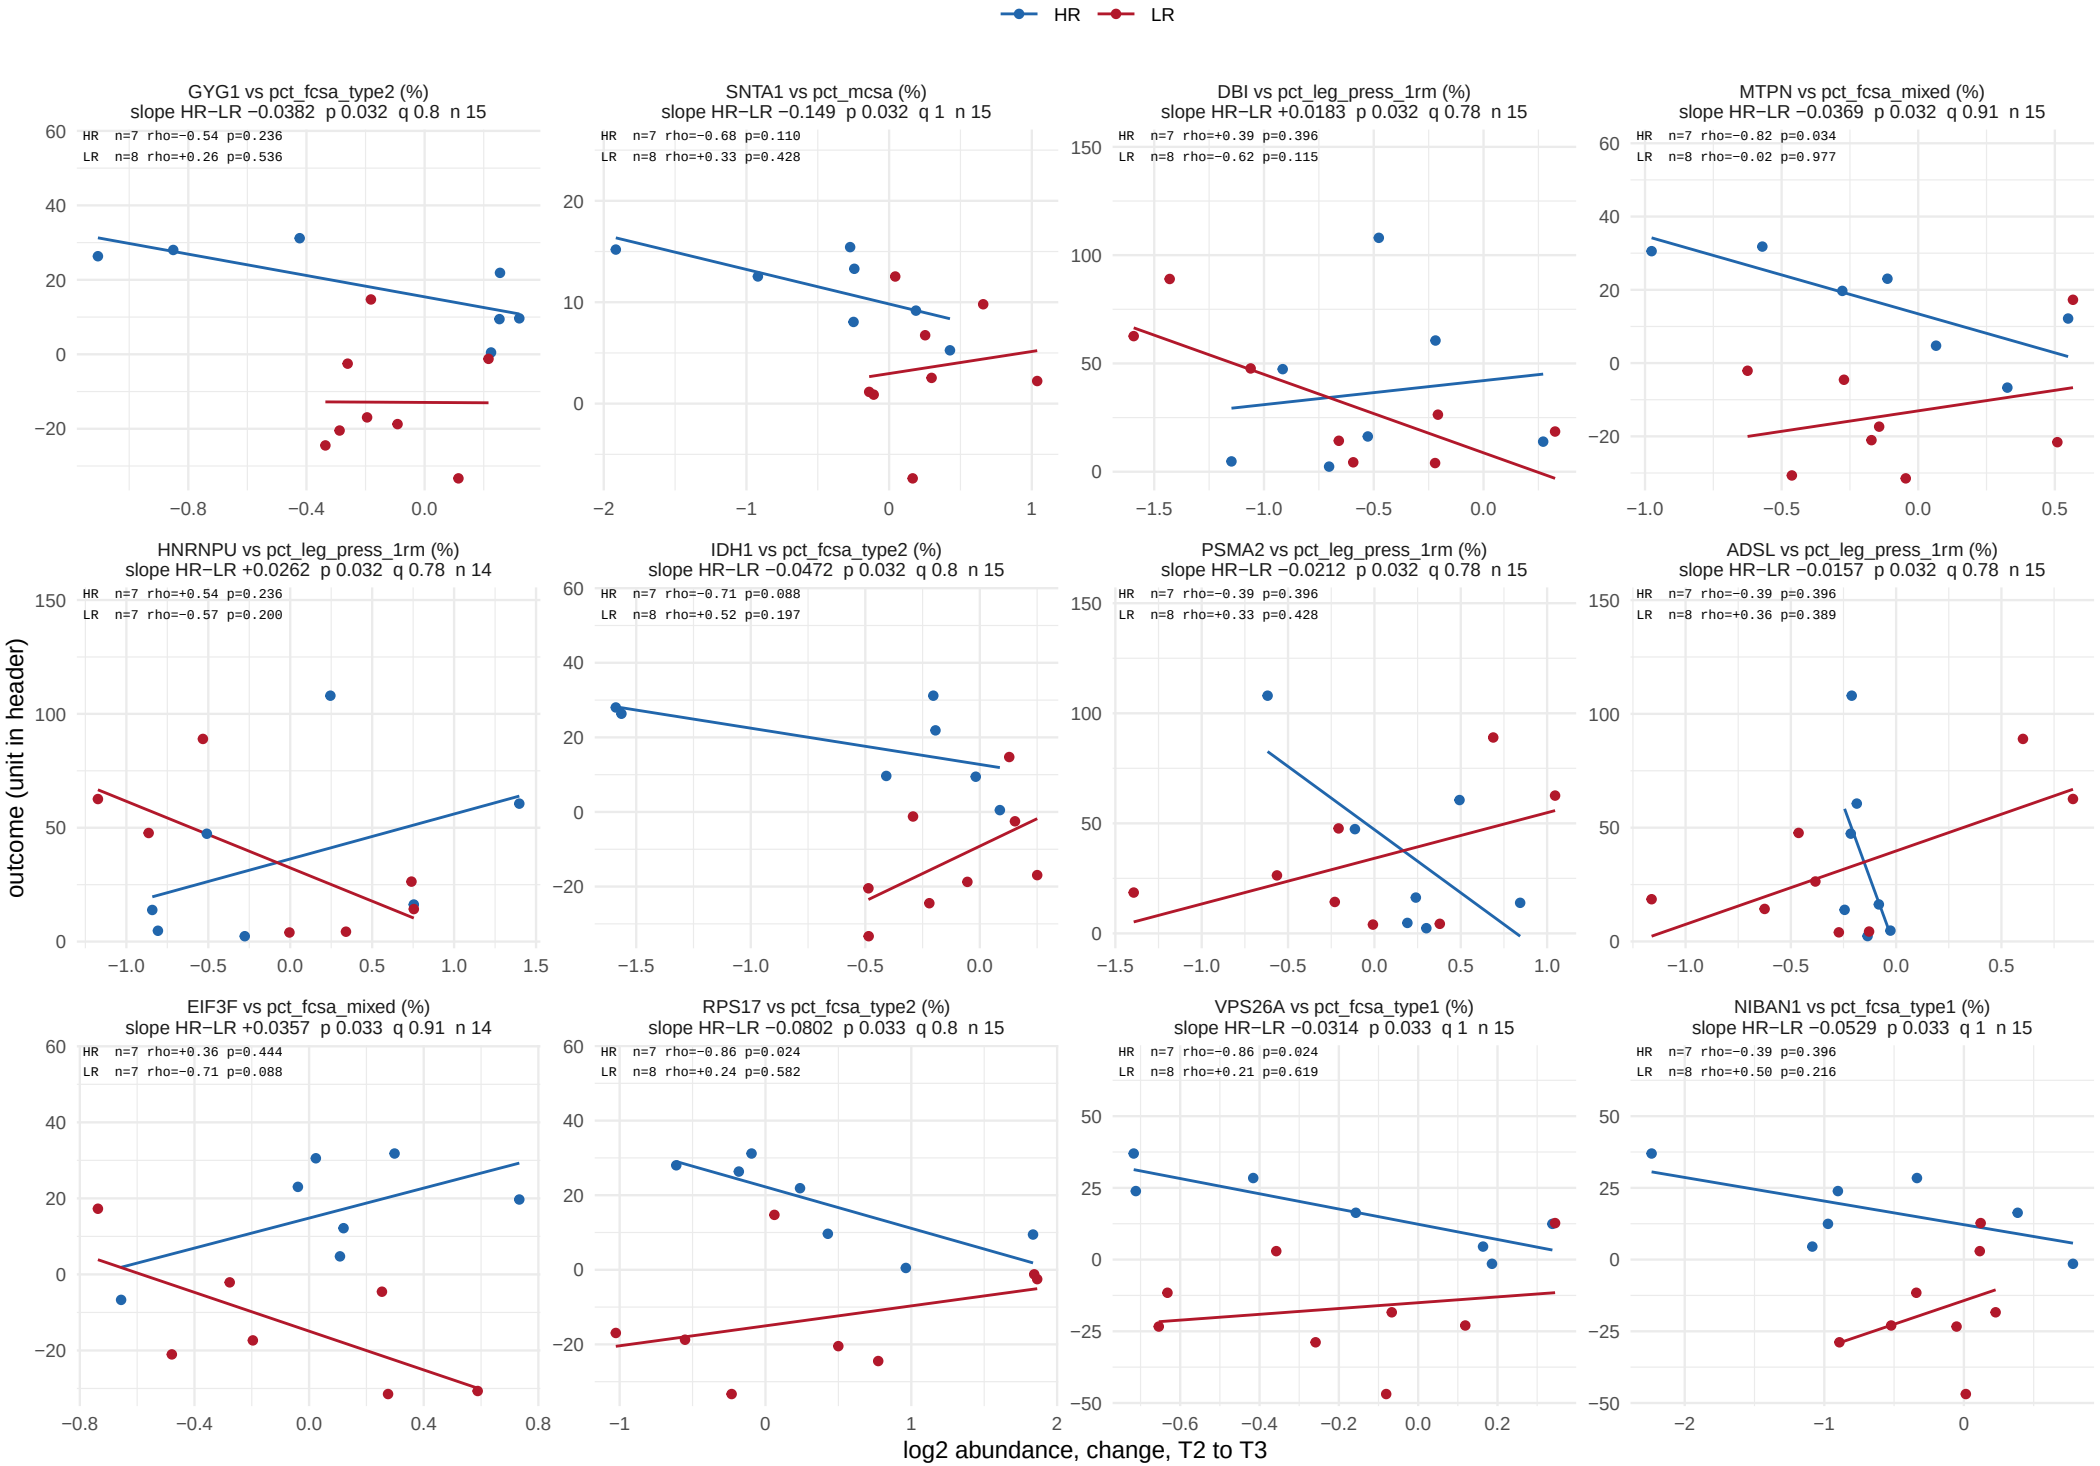

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


482 of 9765 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 26 of 41.

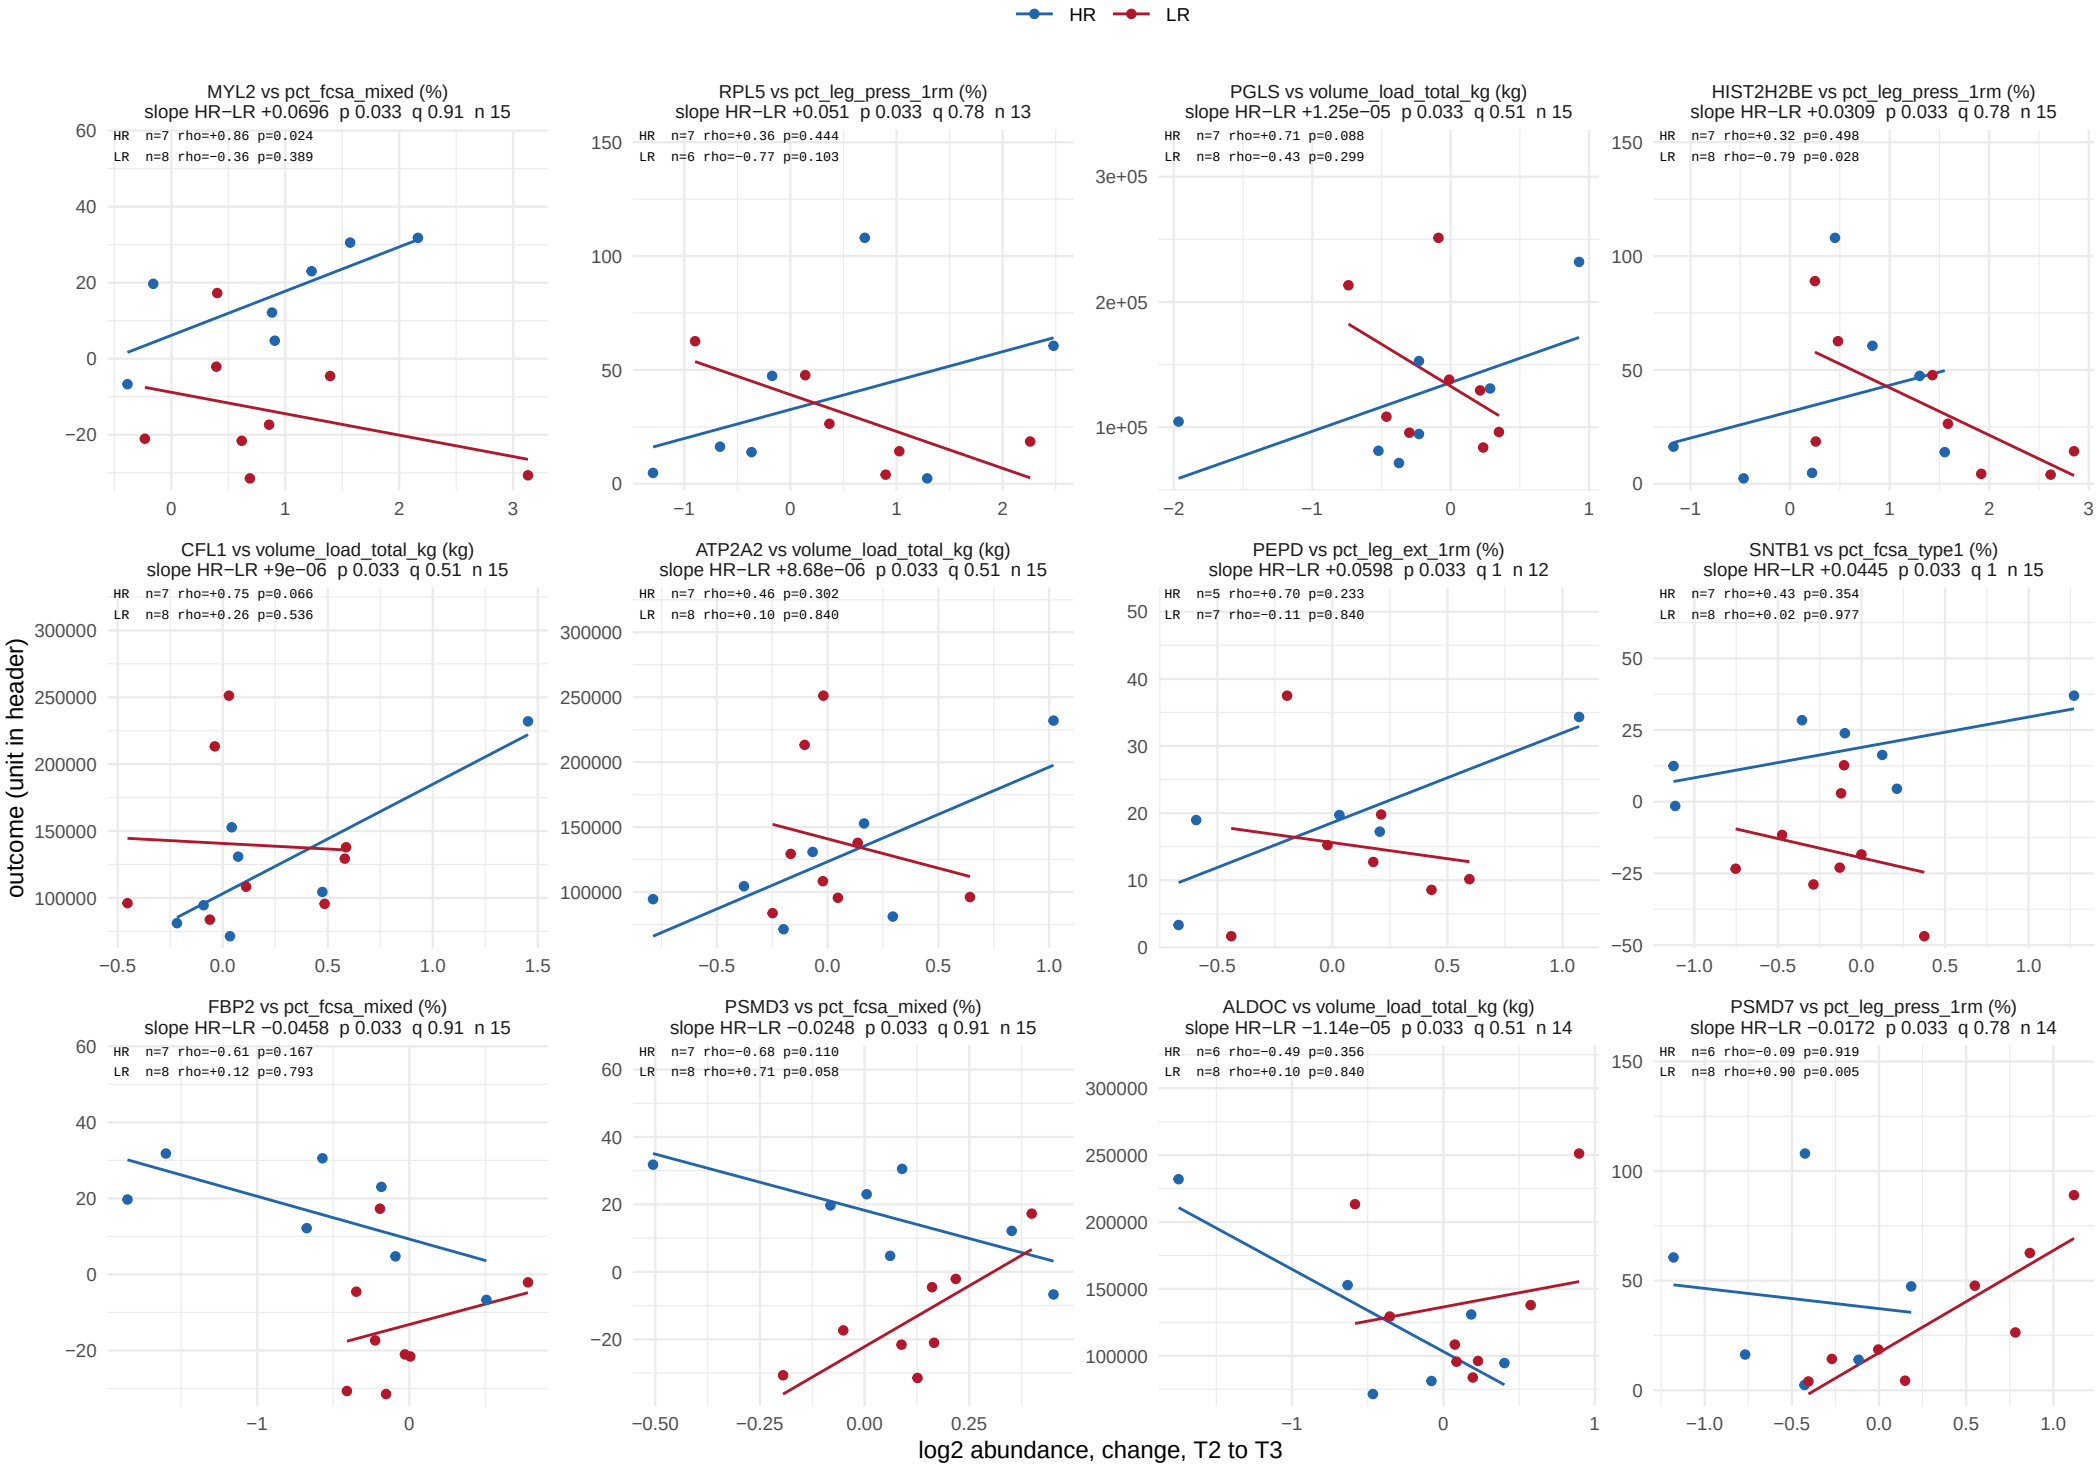

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


482 of 9765 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 27 of 41.

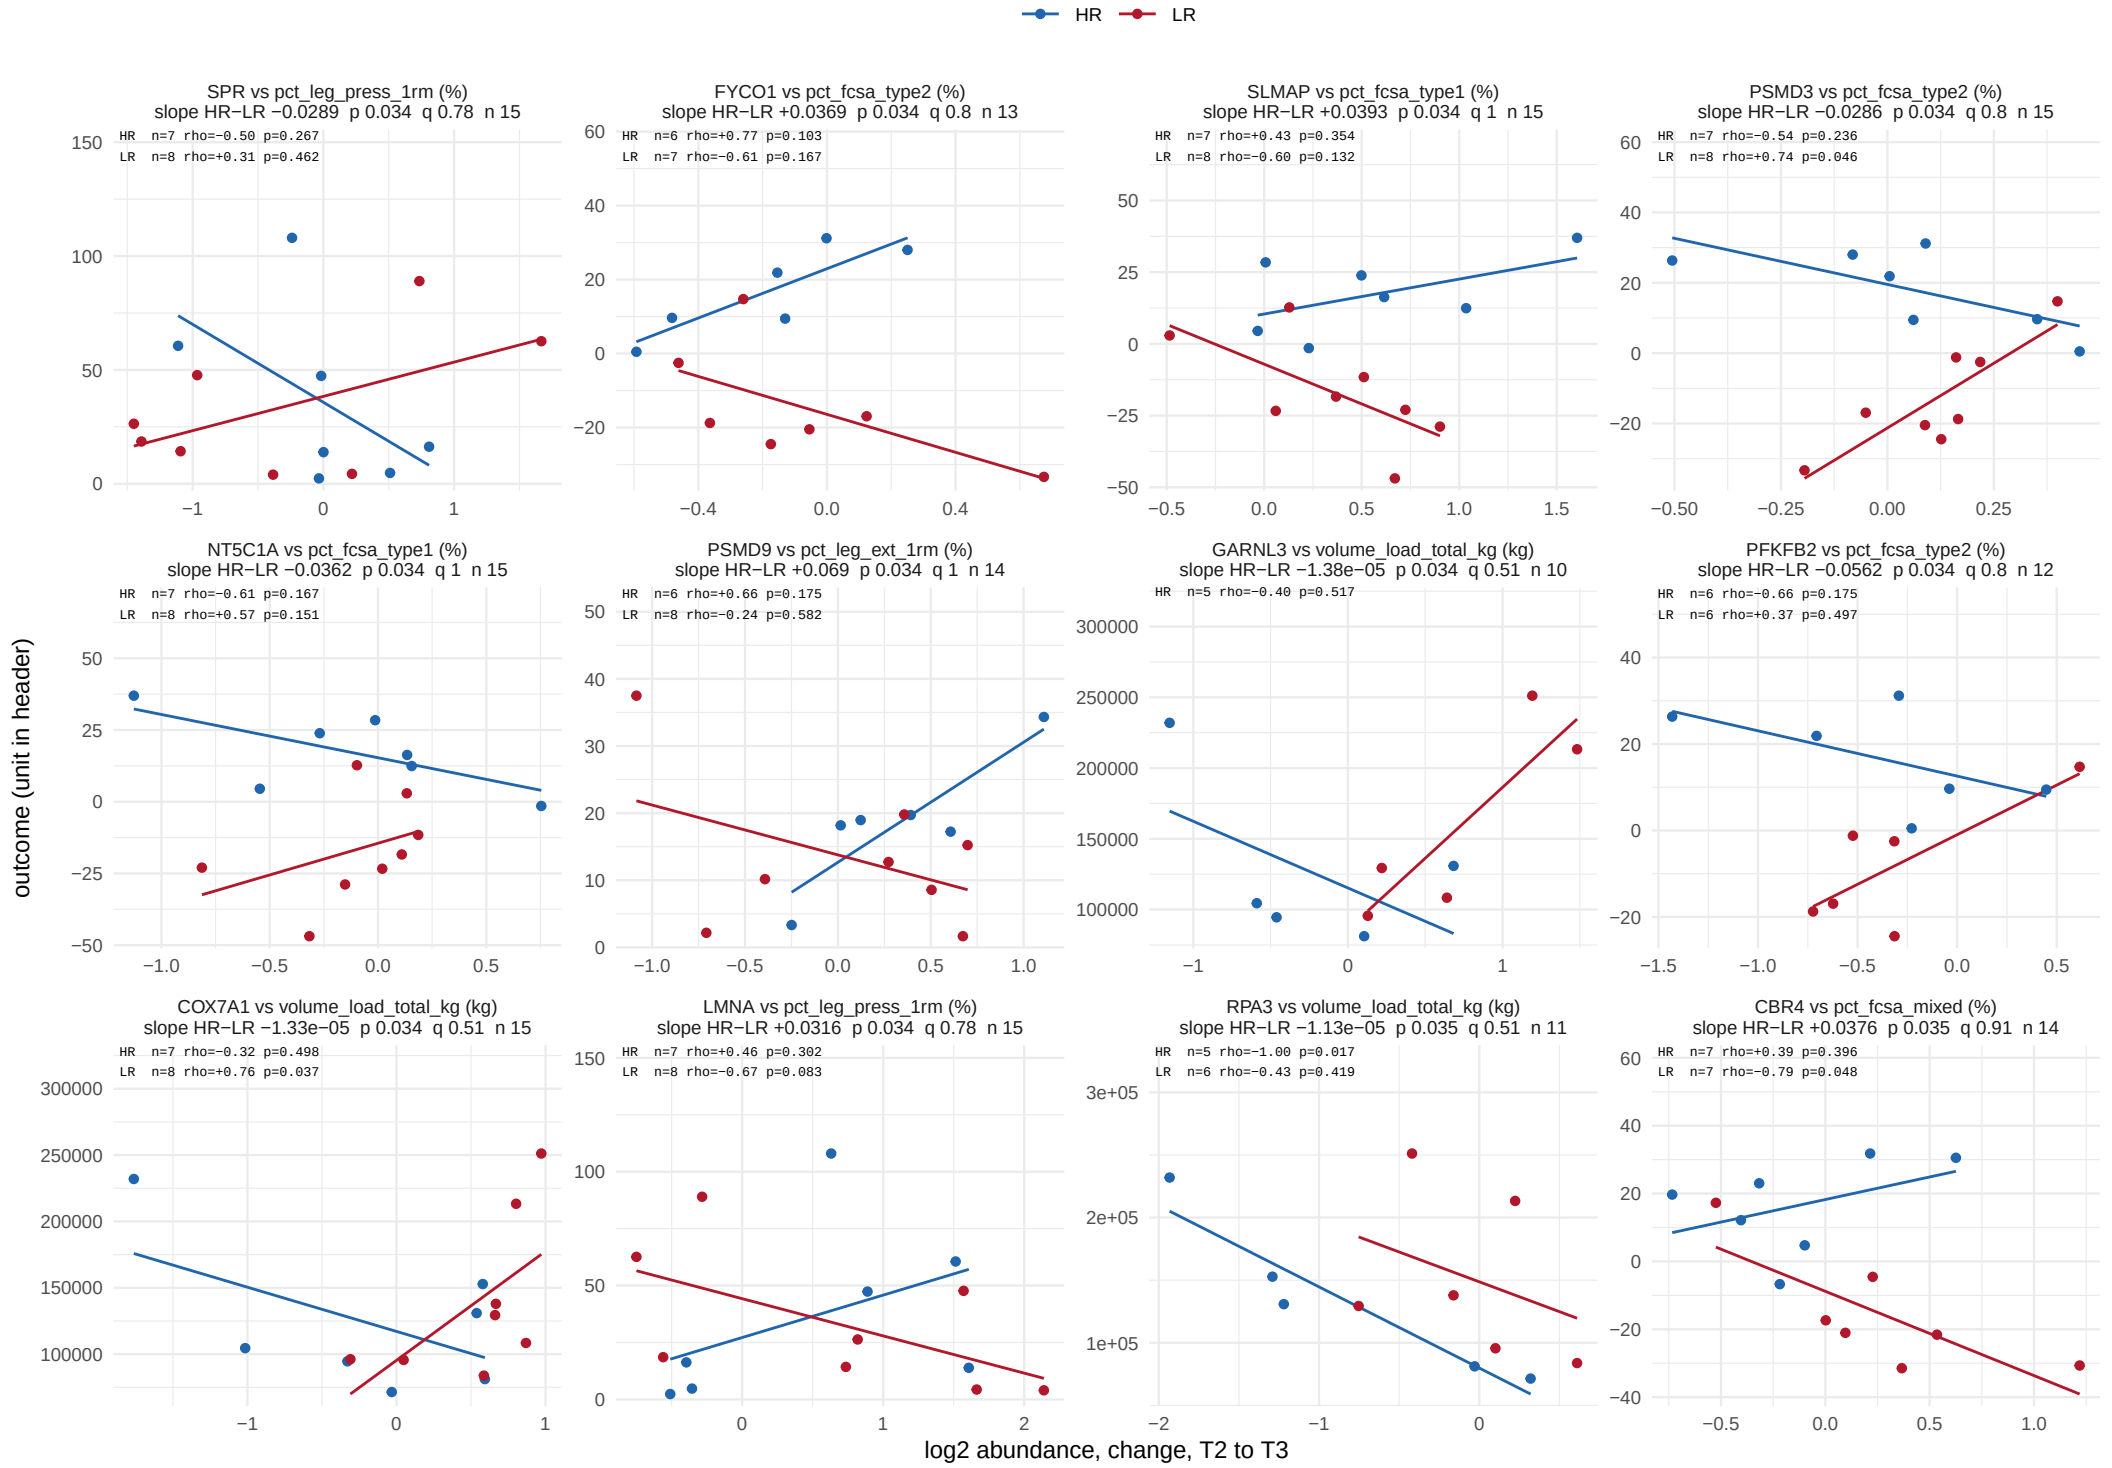

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


482 of 9765 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 28 of 41.

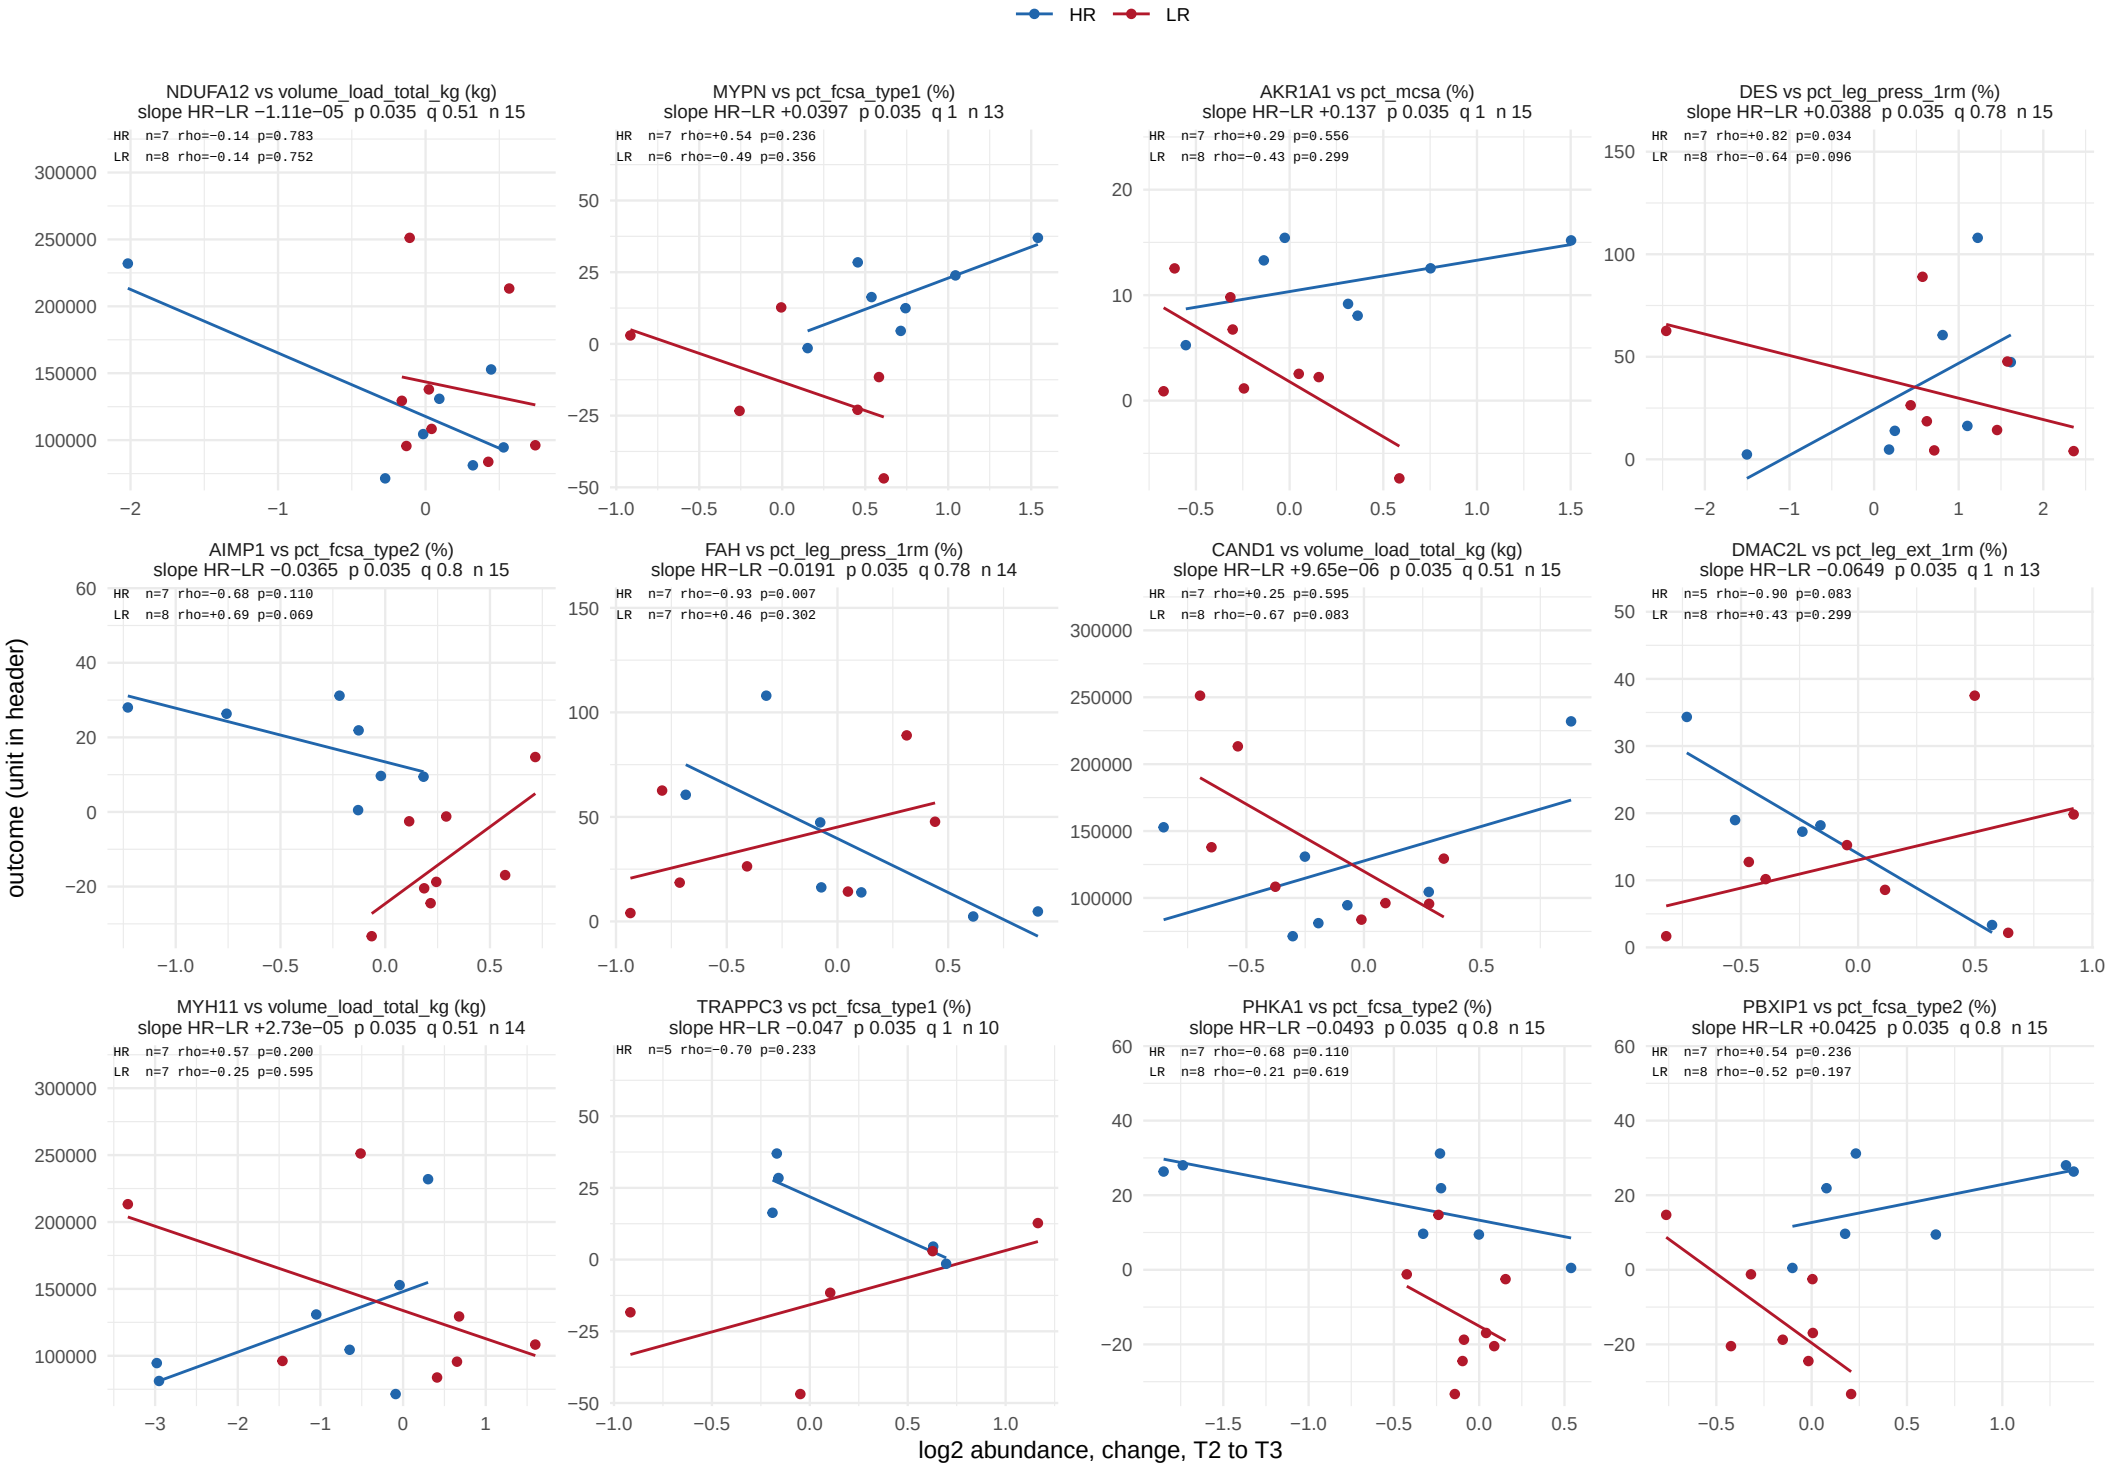

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


482 of 9765 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 29 of 41.

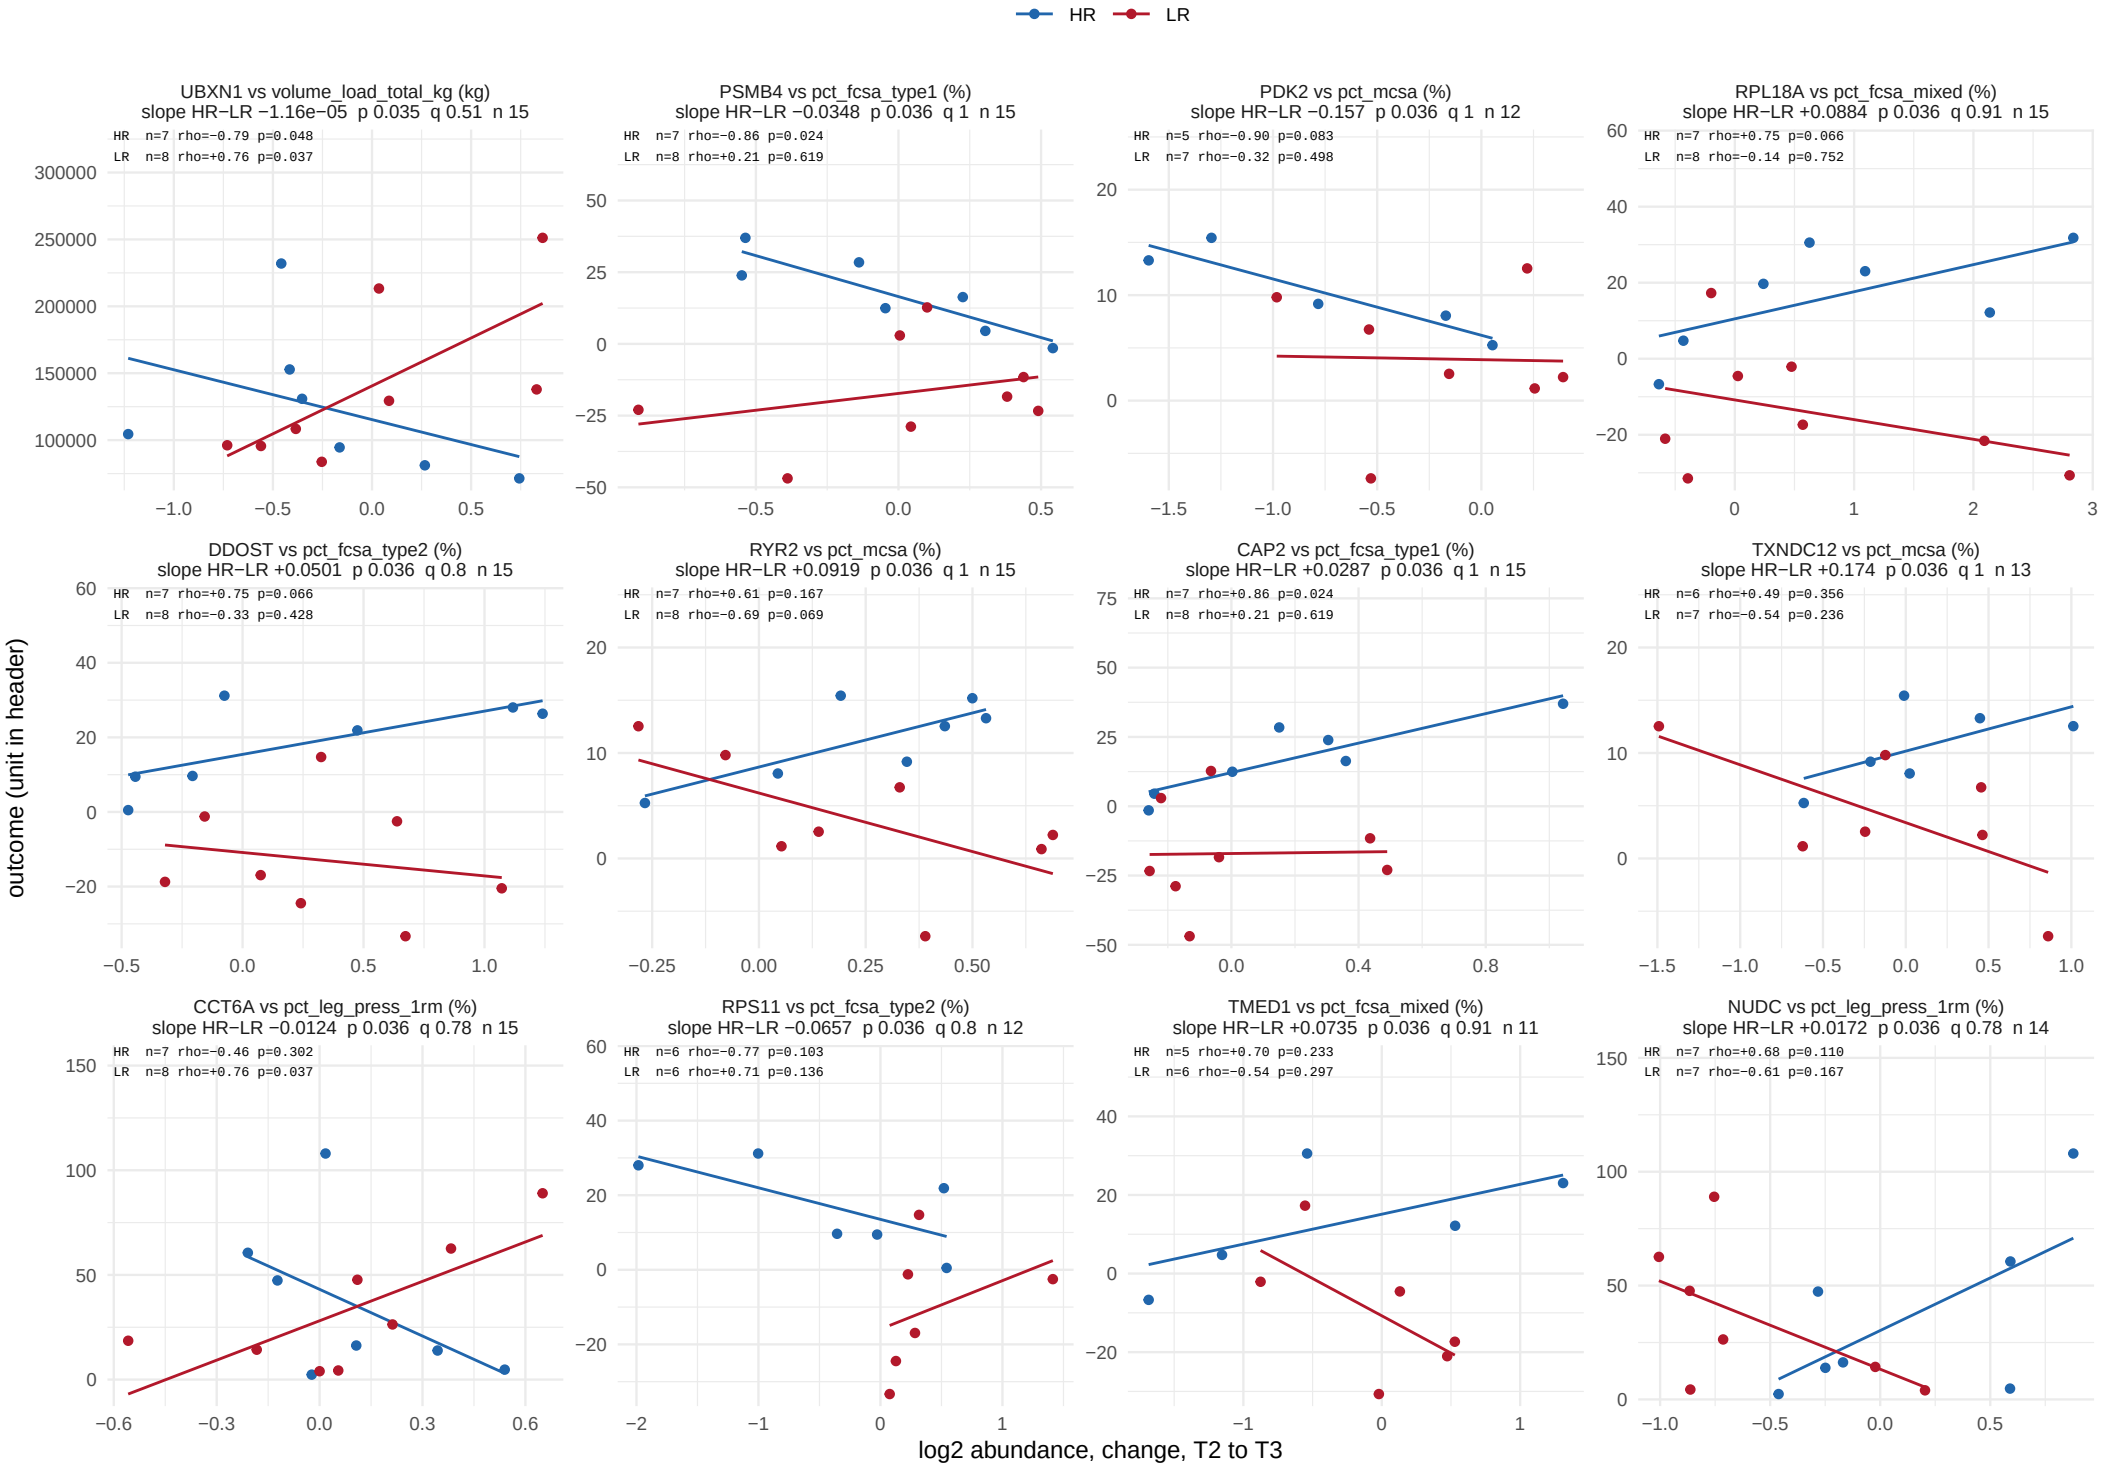

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


482 of 9765 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 30 of 41.

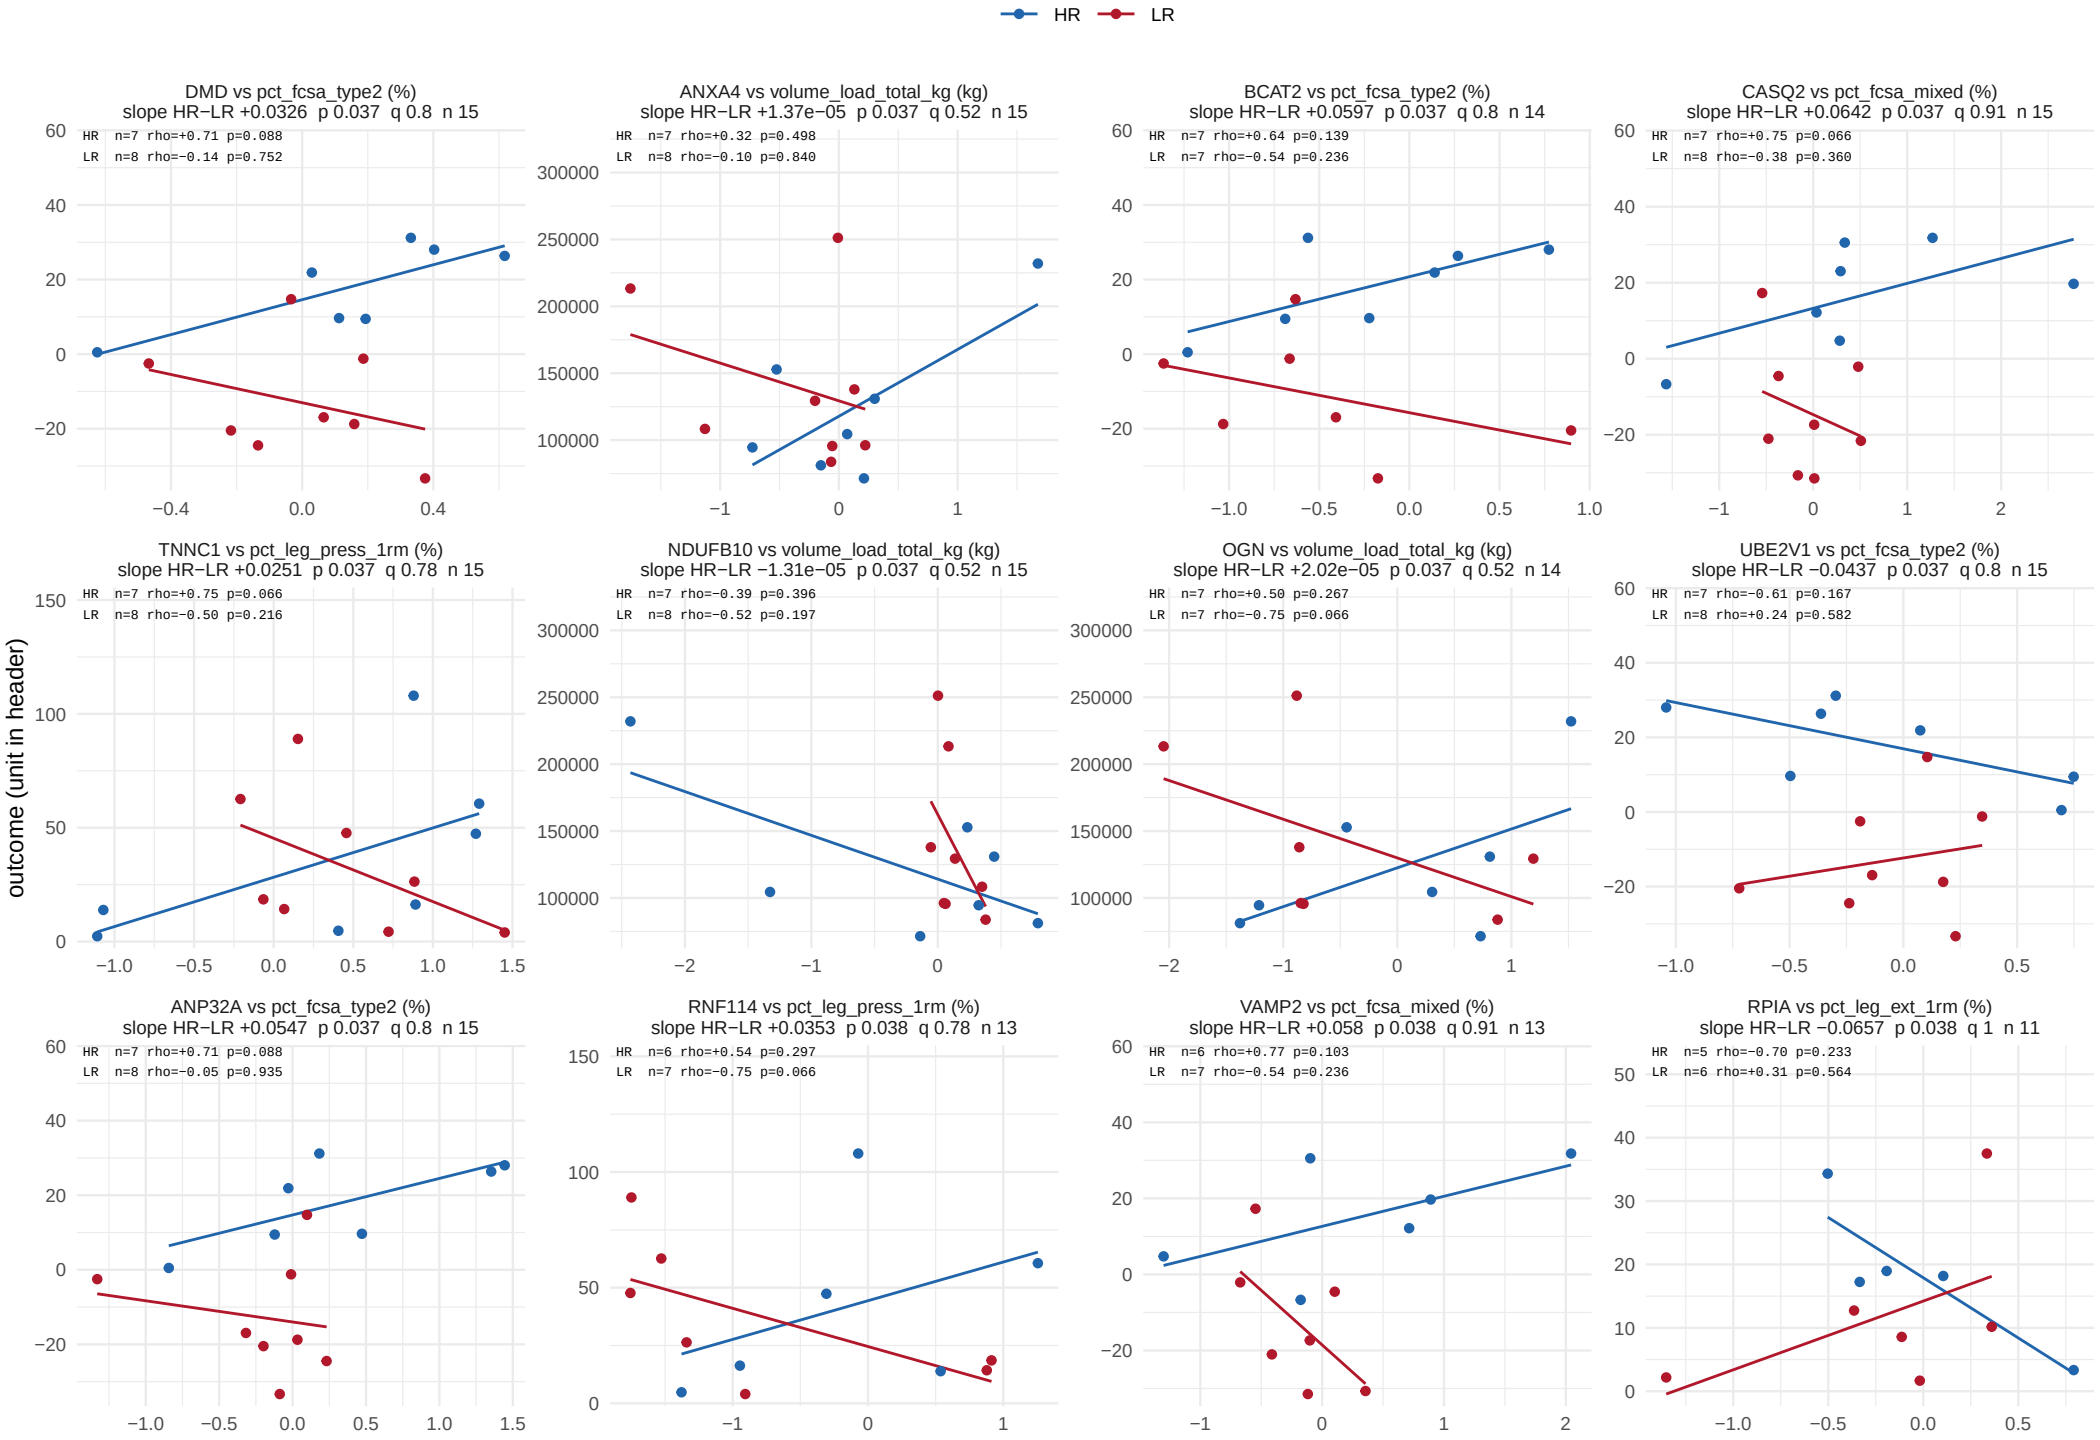

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


482 of 9765 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 31 of 41.

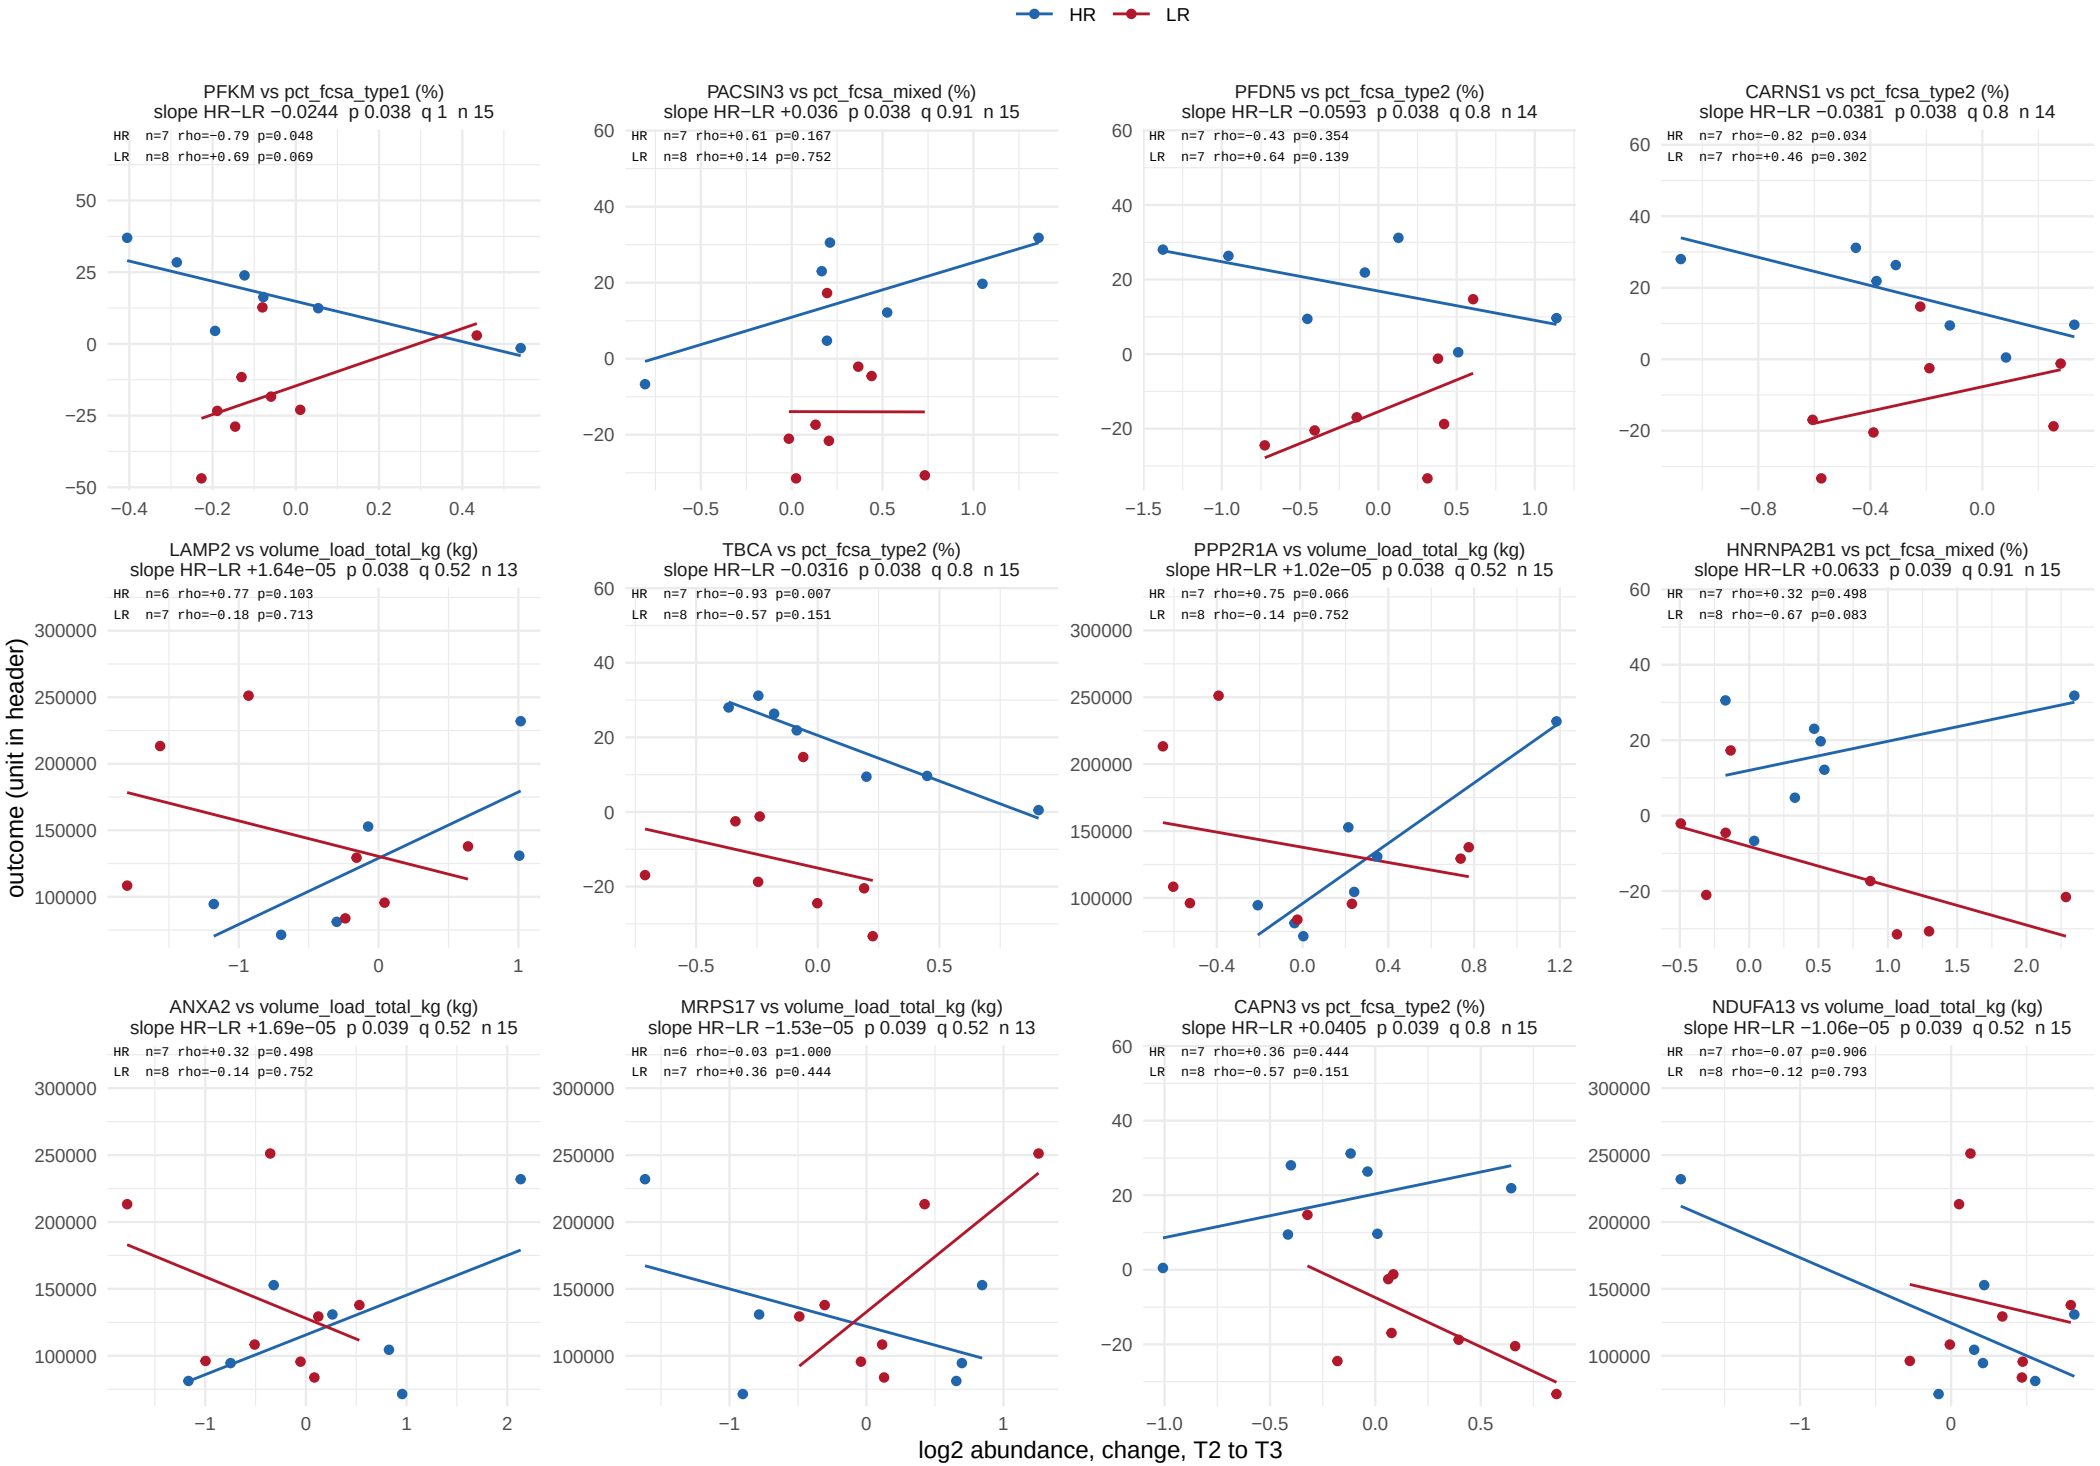

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


482 of 9765 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 32 of 41.

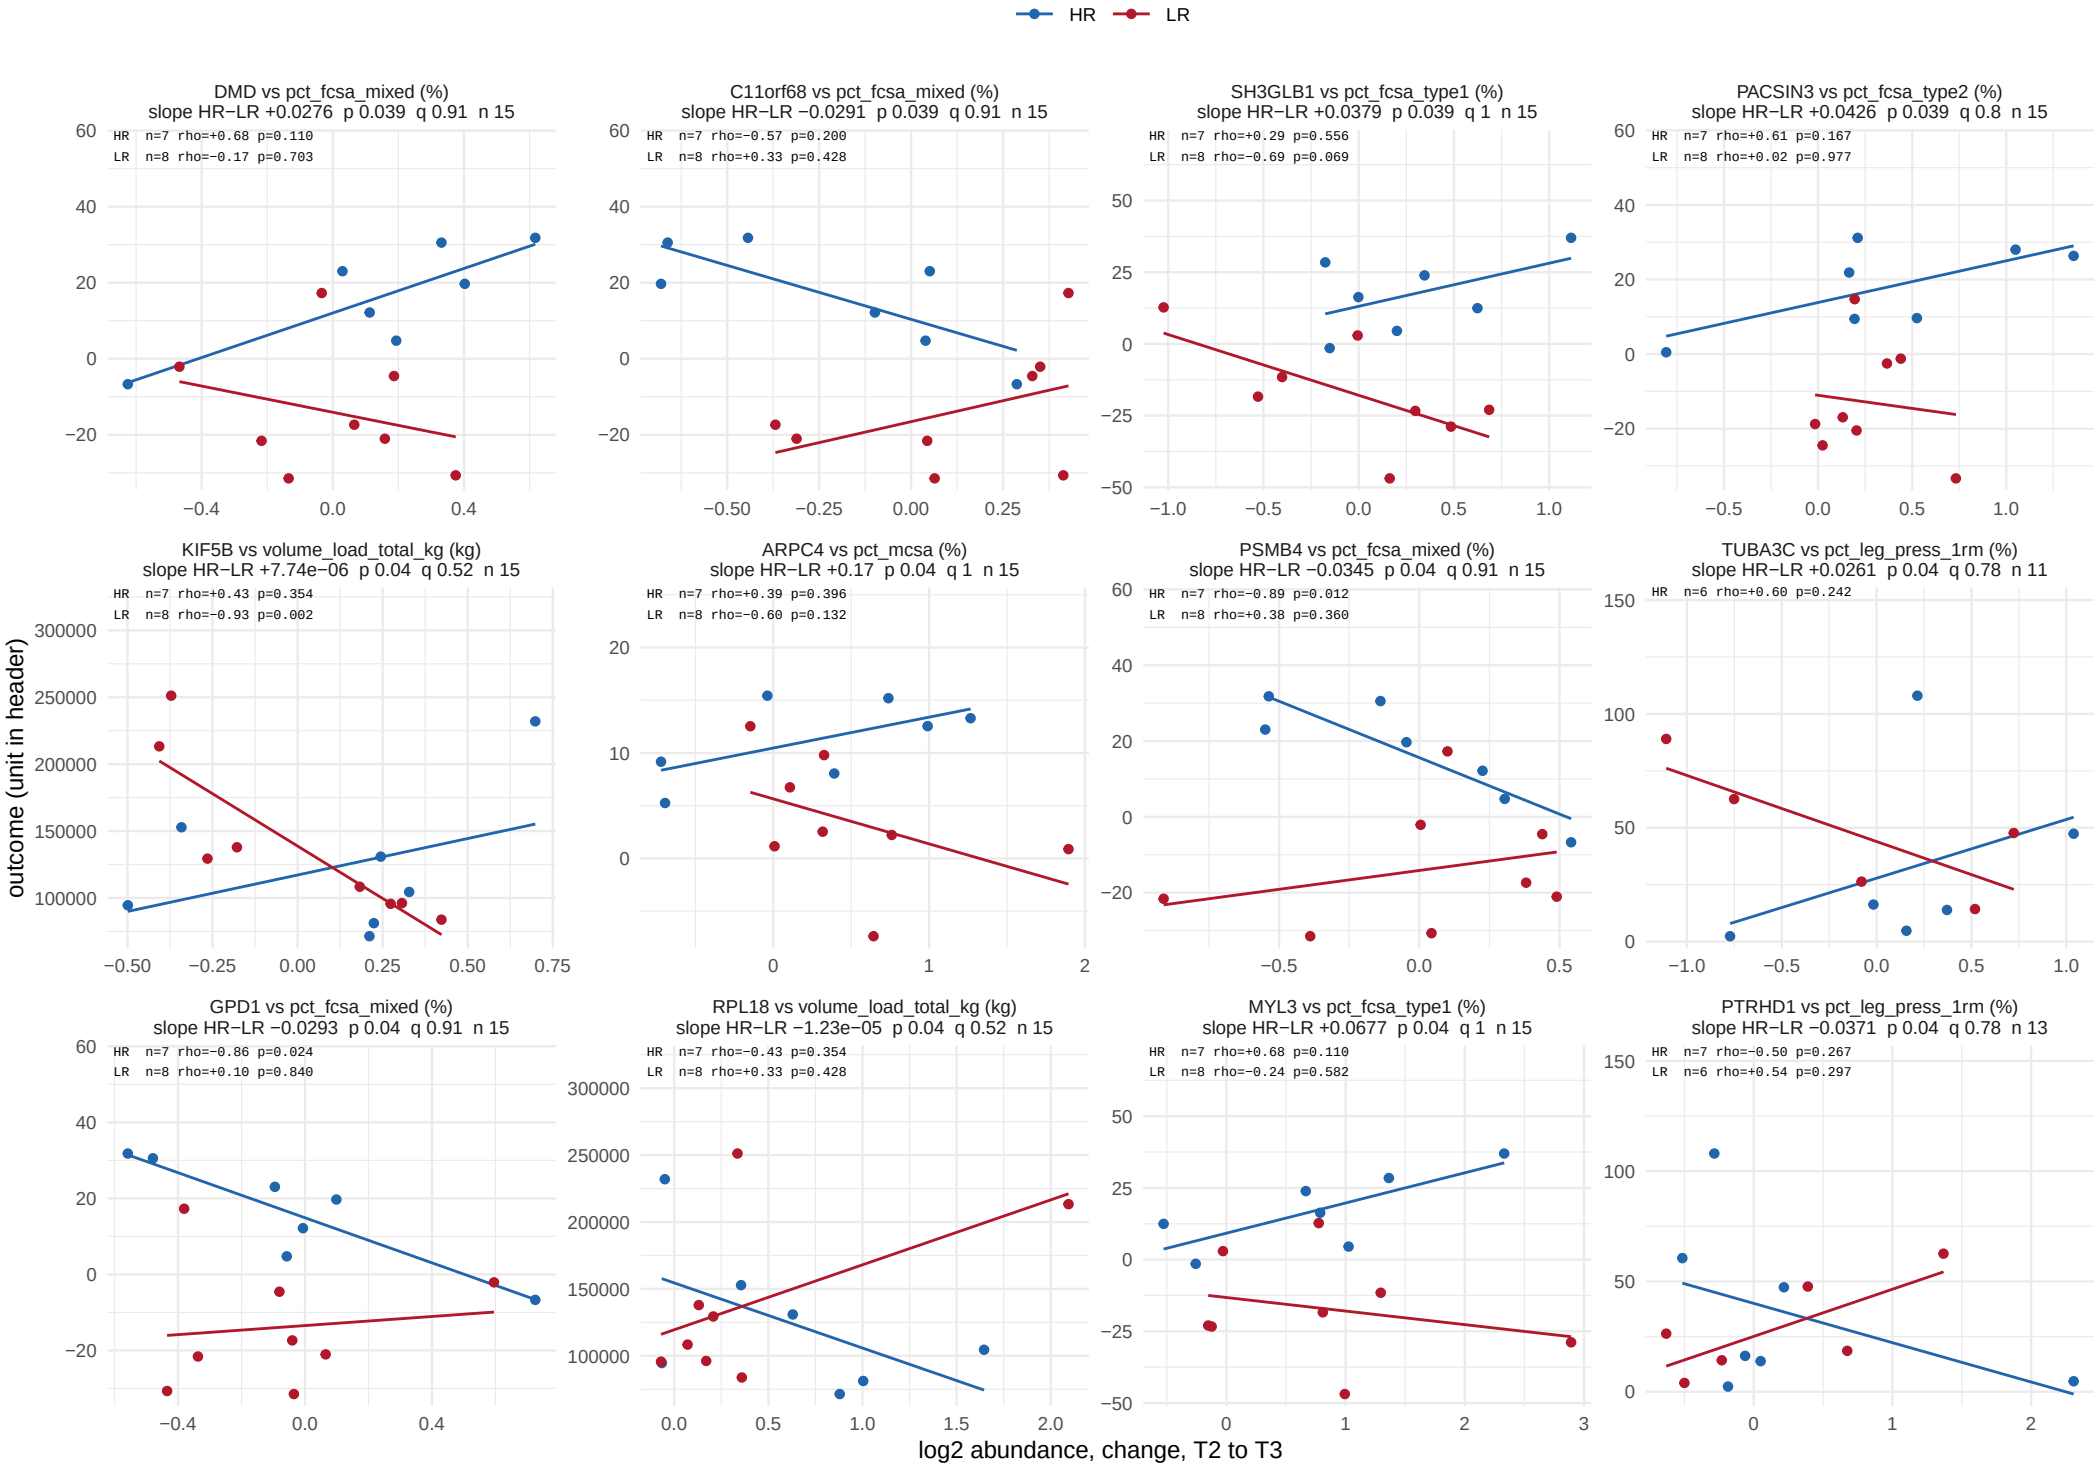

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


482 of 9765 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 33 of 41.

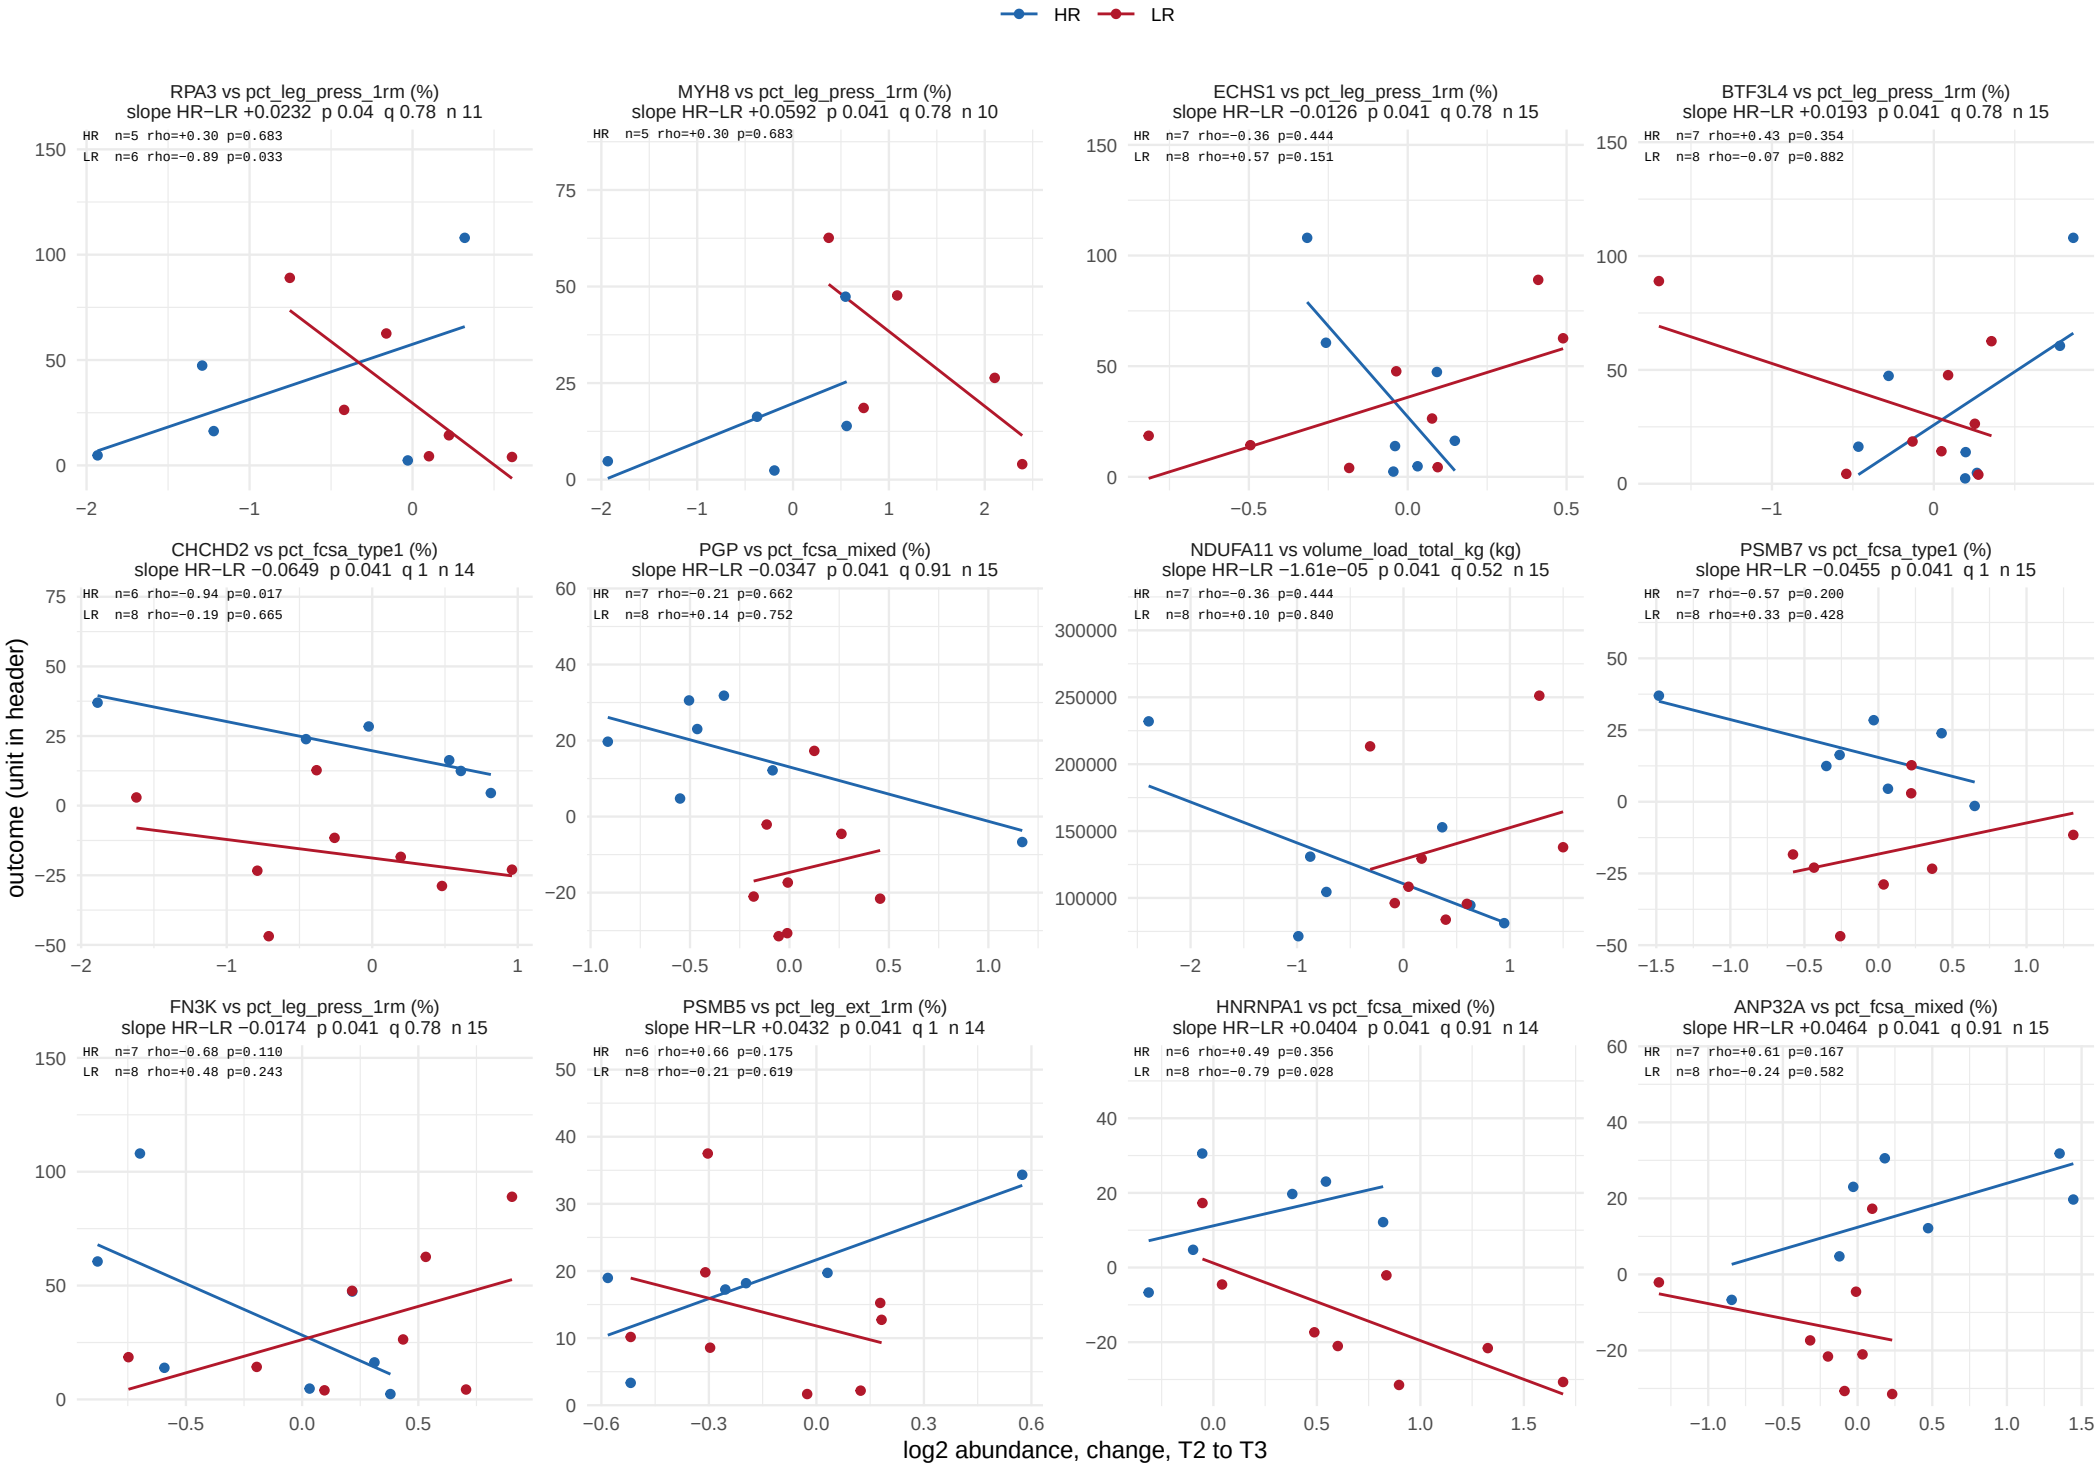

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


482 of 9765 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 34 of 41.

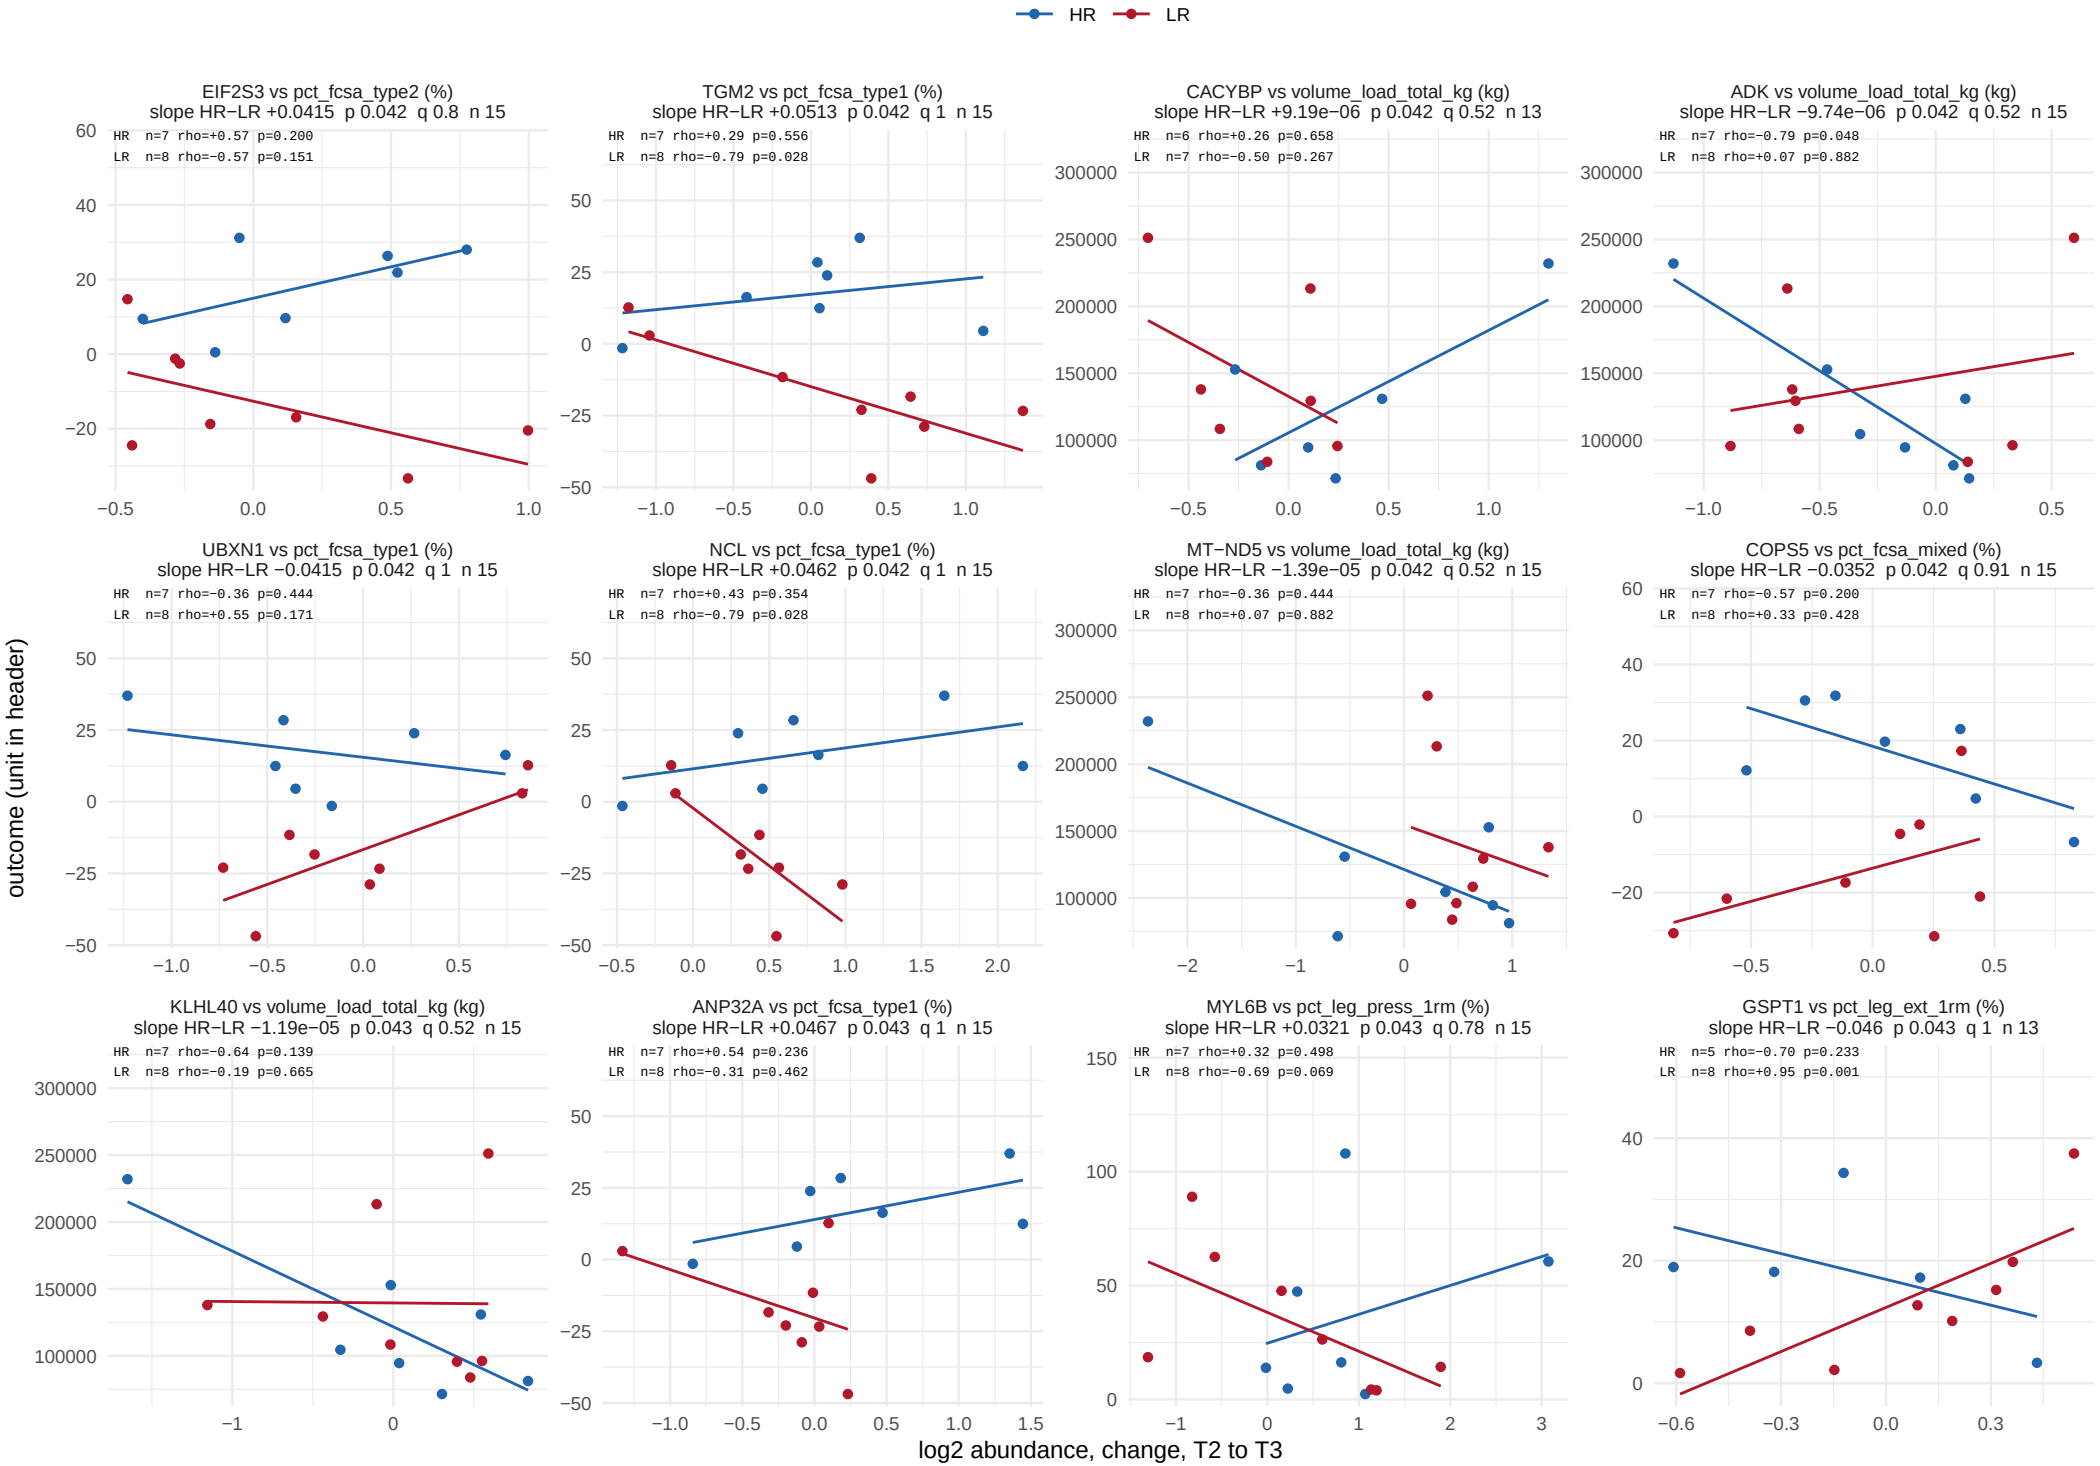

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


482 of 9765 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 35 of 41.

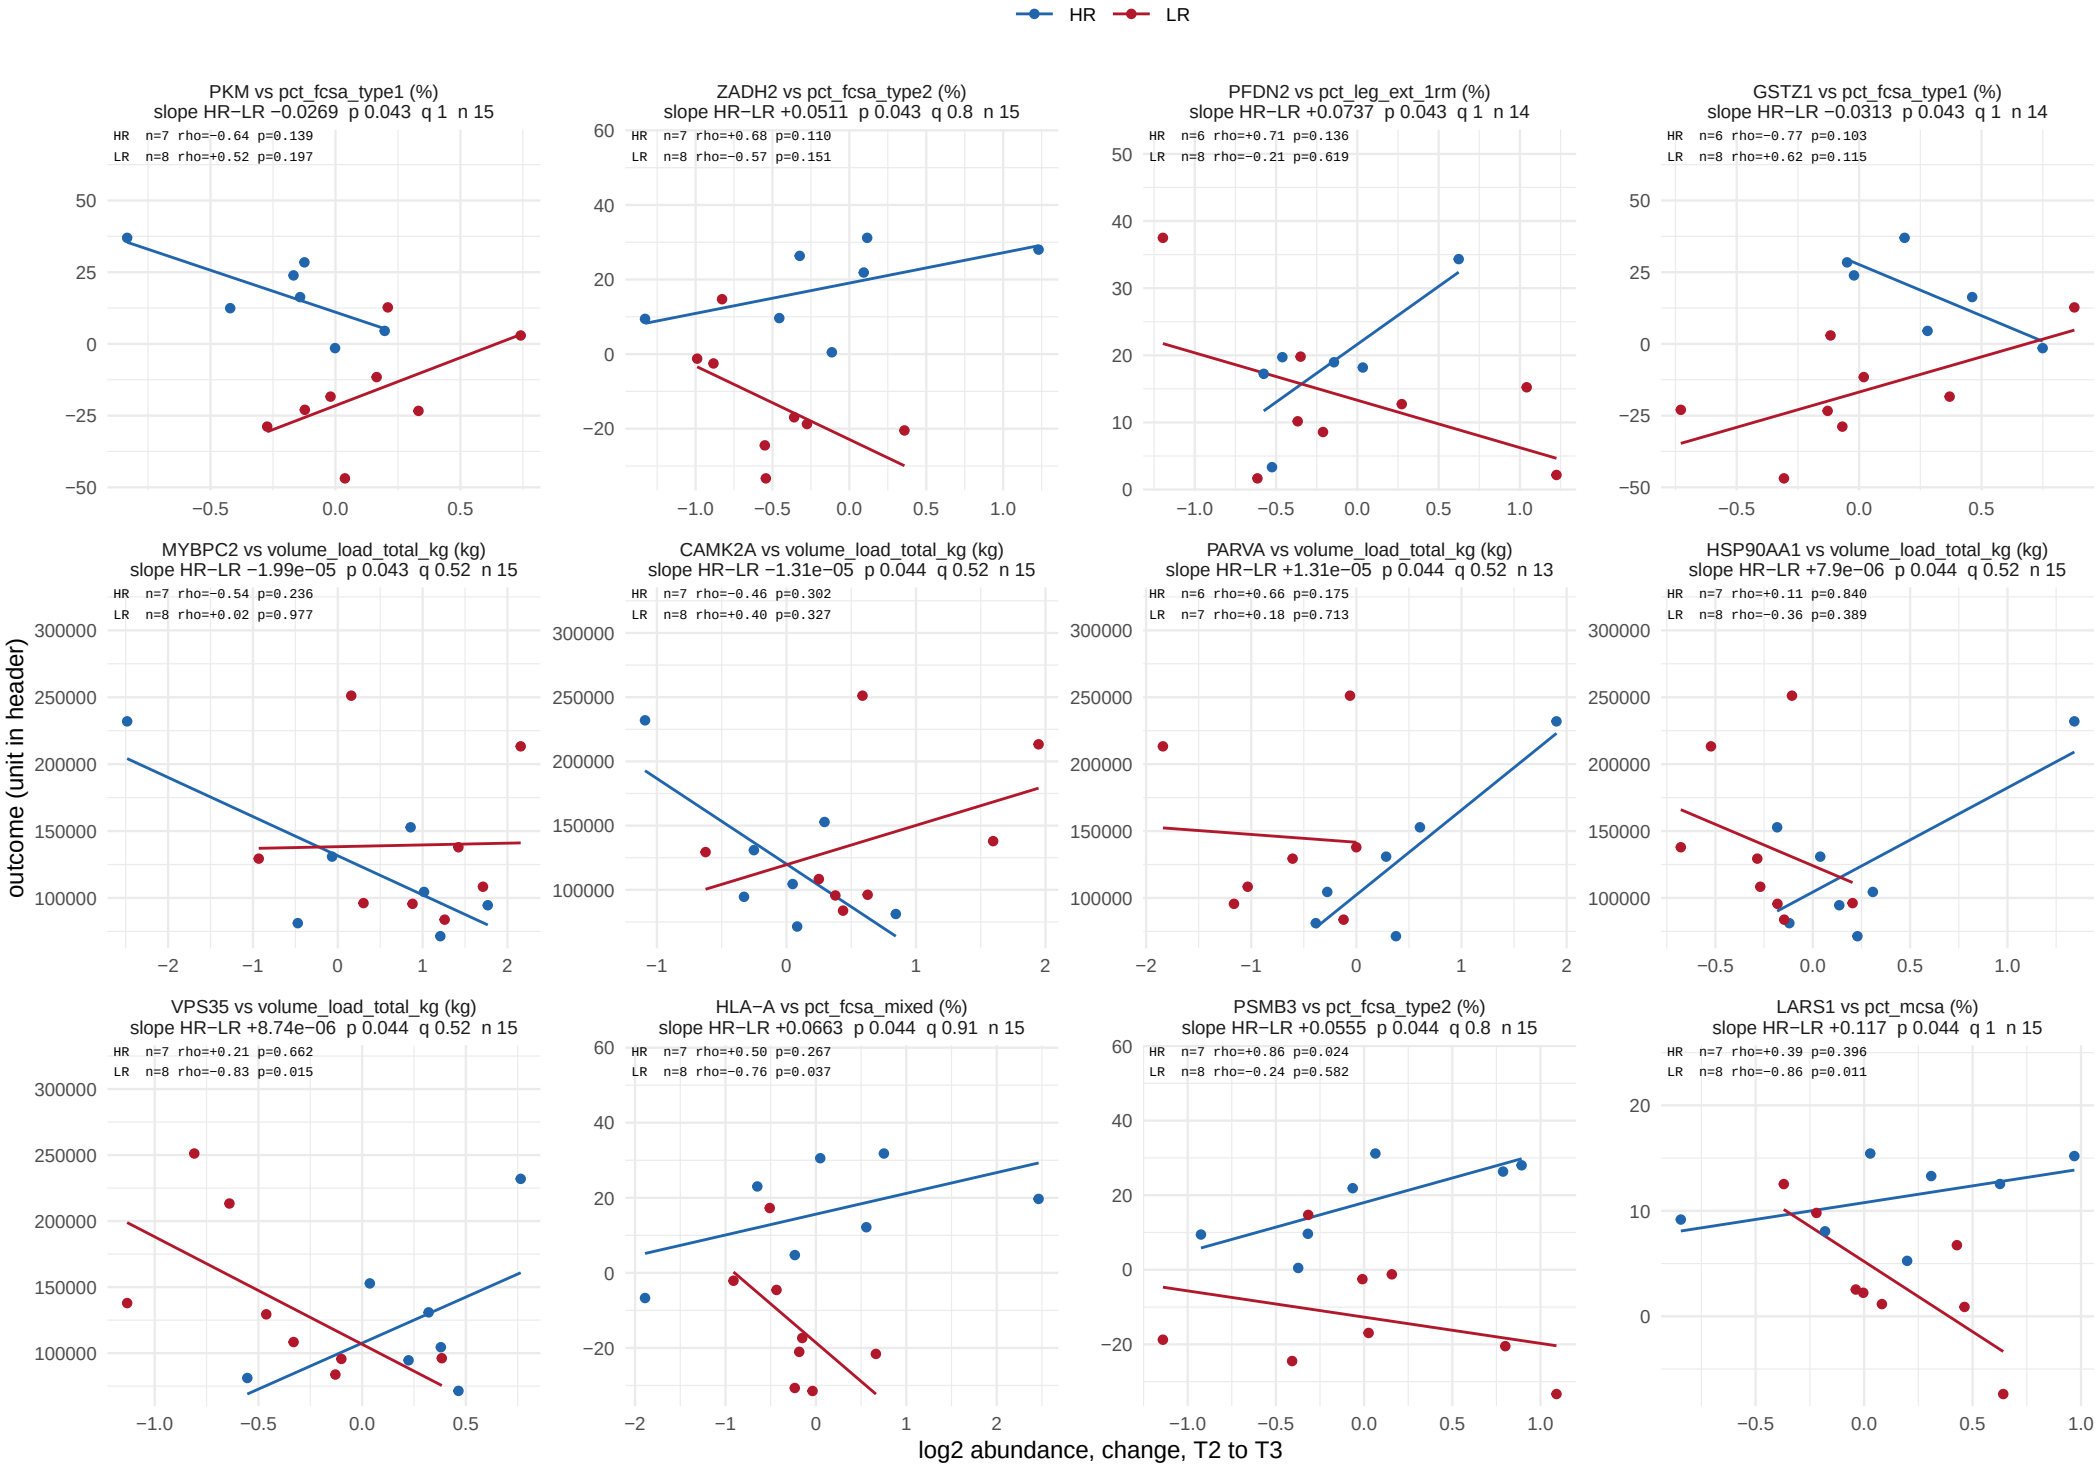

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


482 of 9765 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 36 of 41.

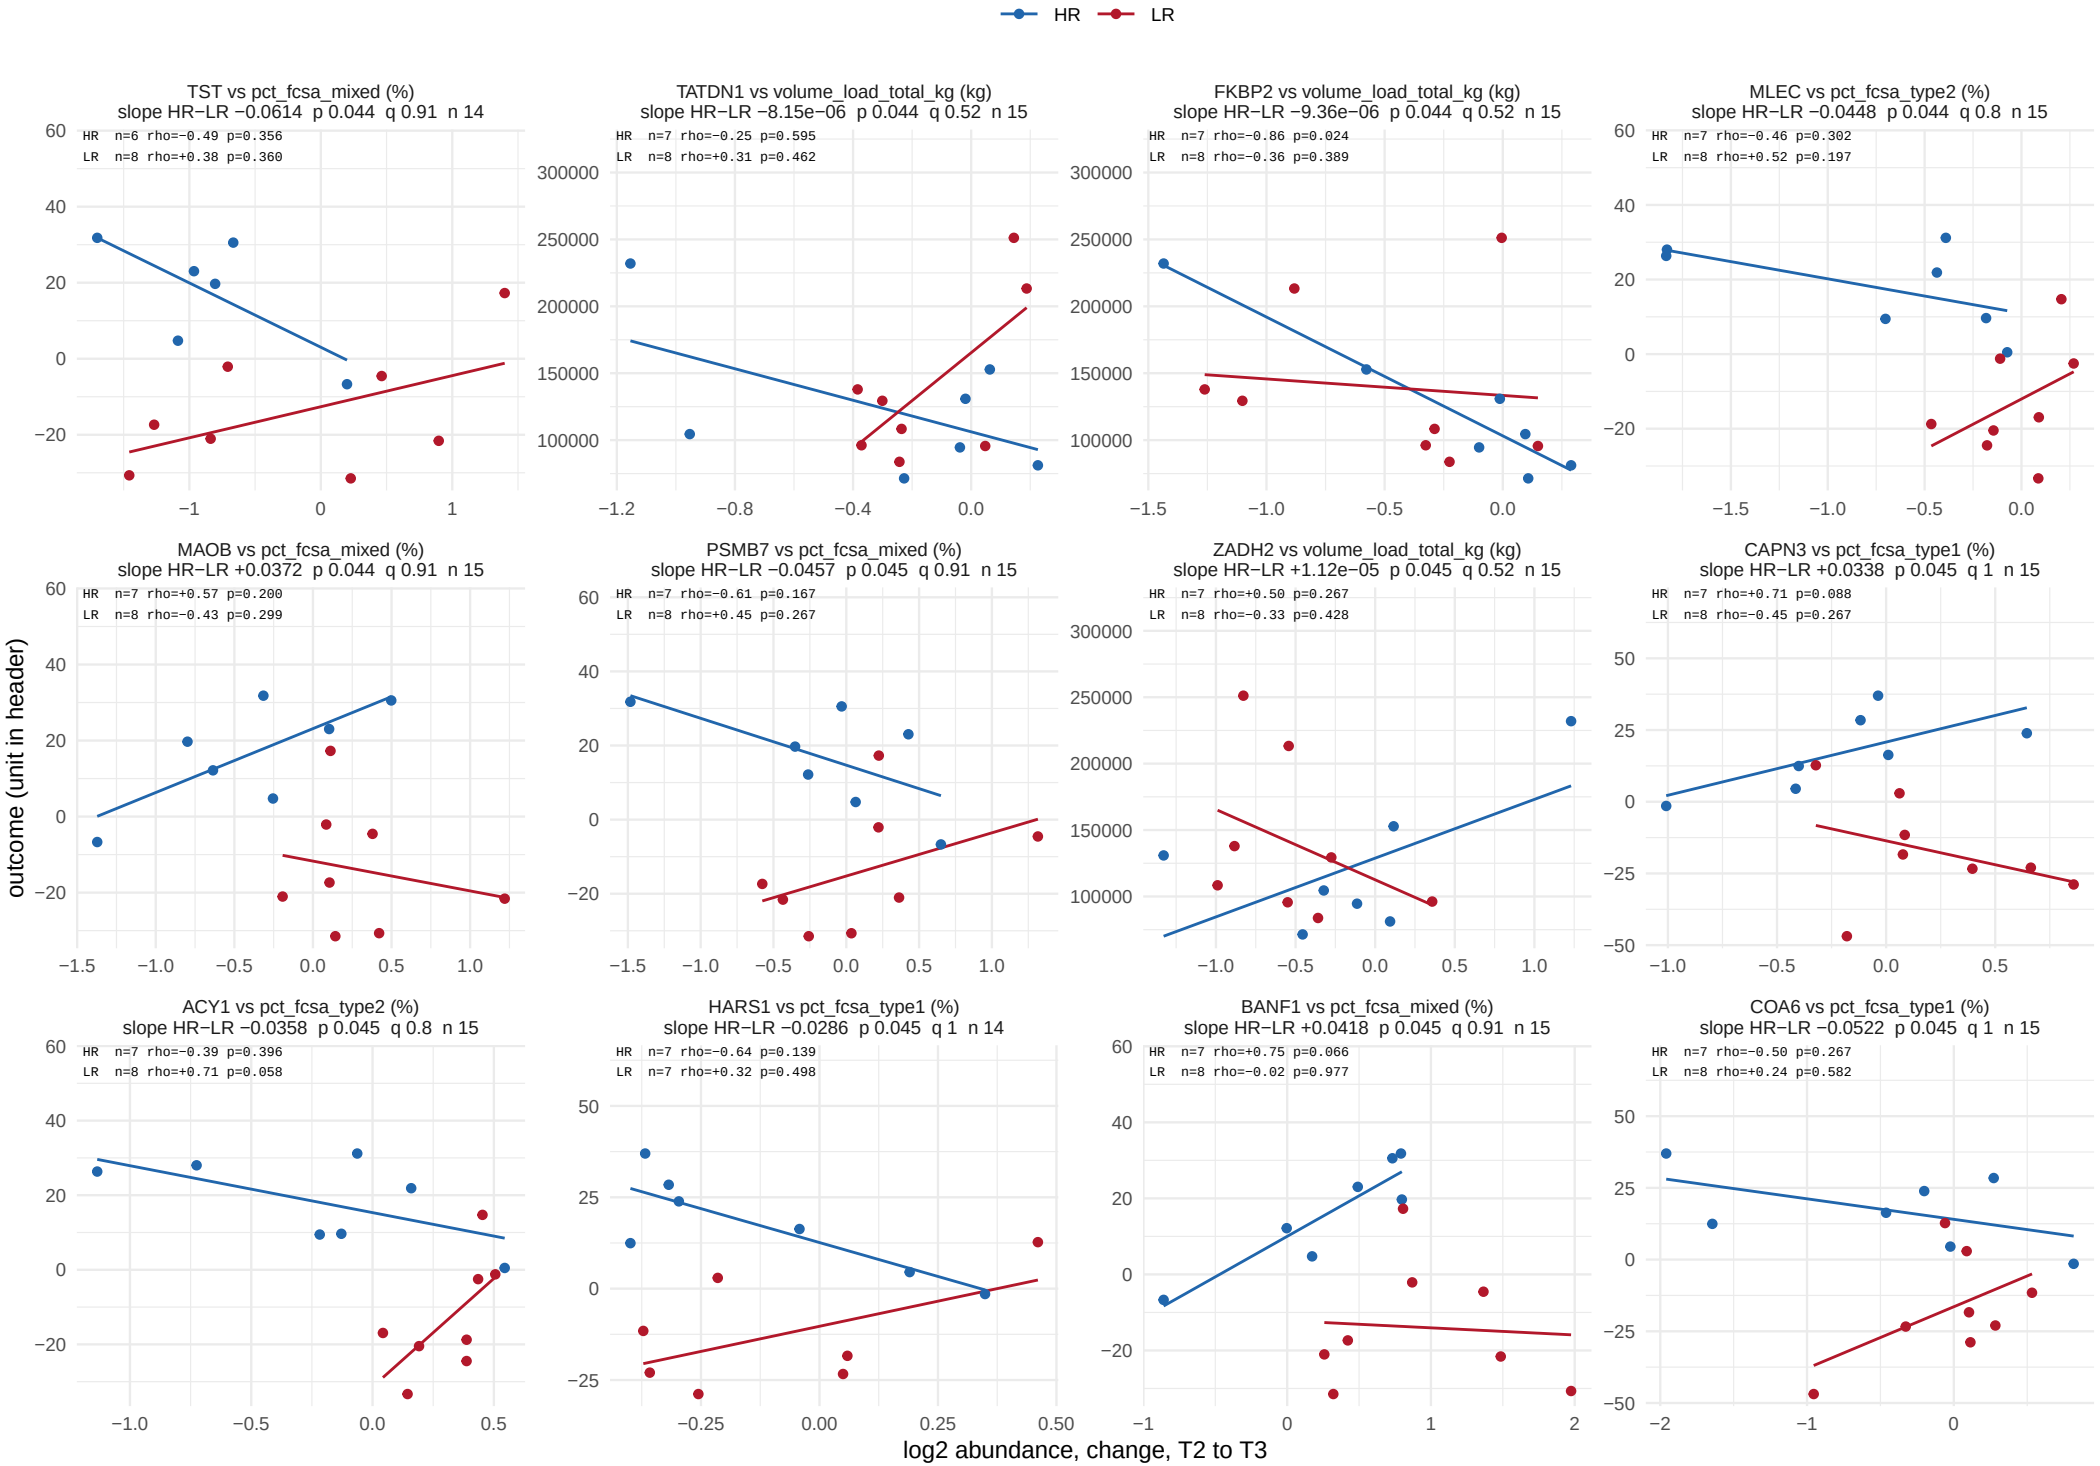

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


482 of 9765 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 37 of 41.

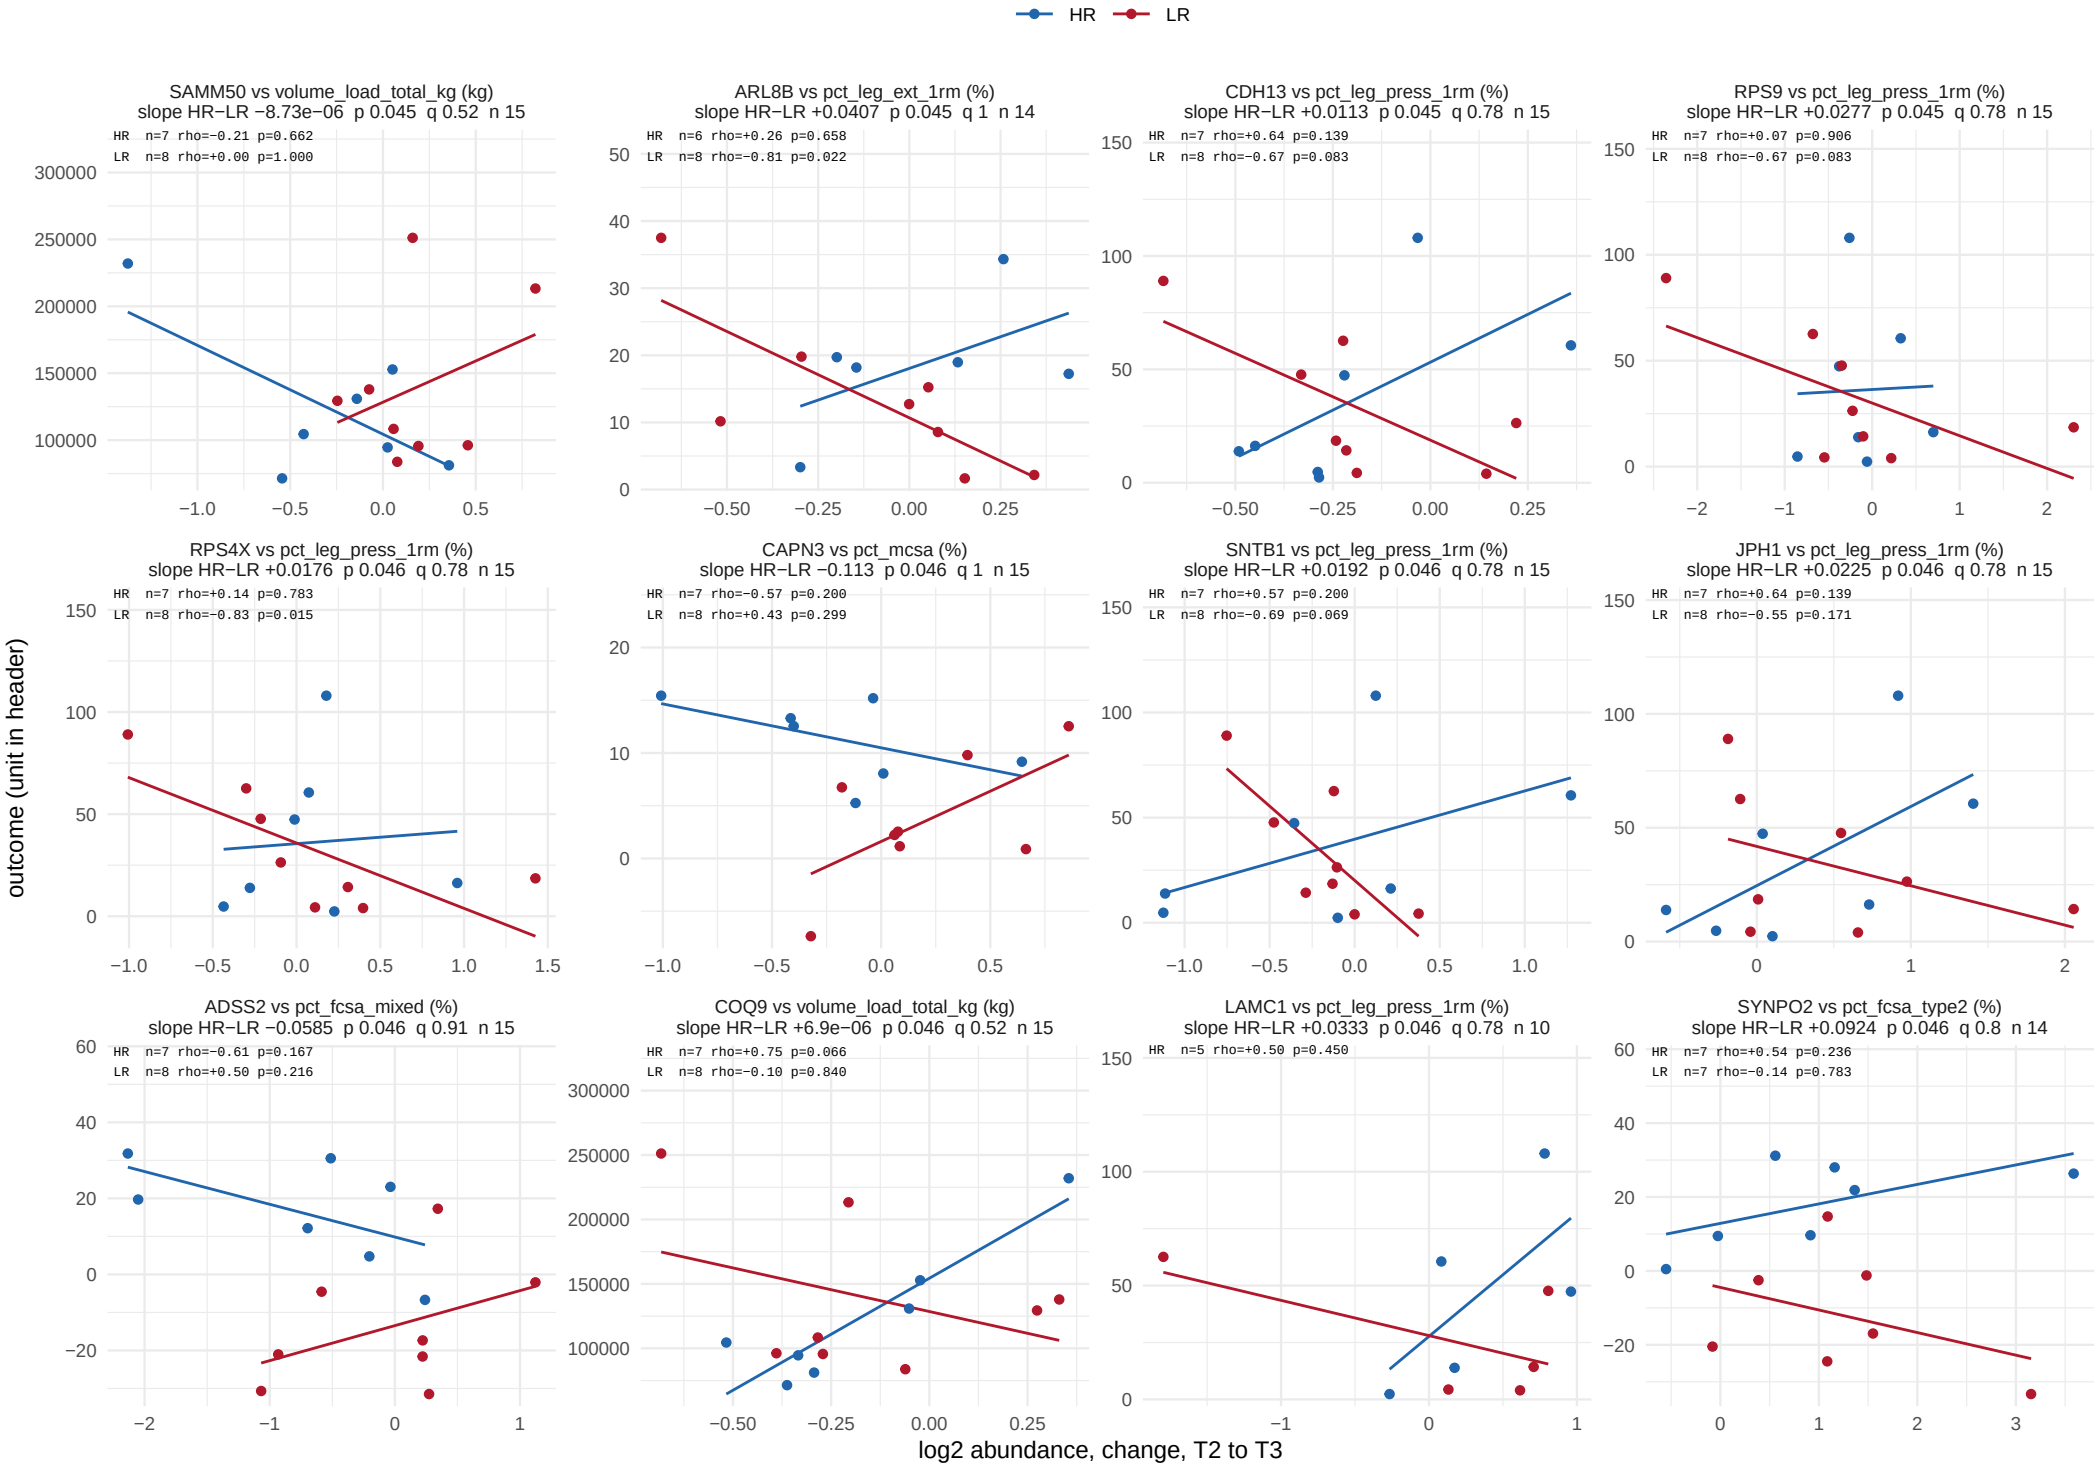

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


482 of 9765 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 38 of 41.

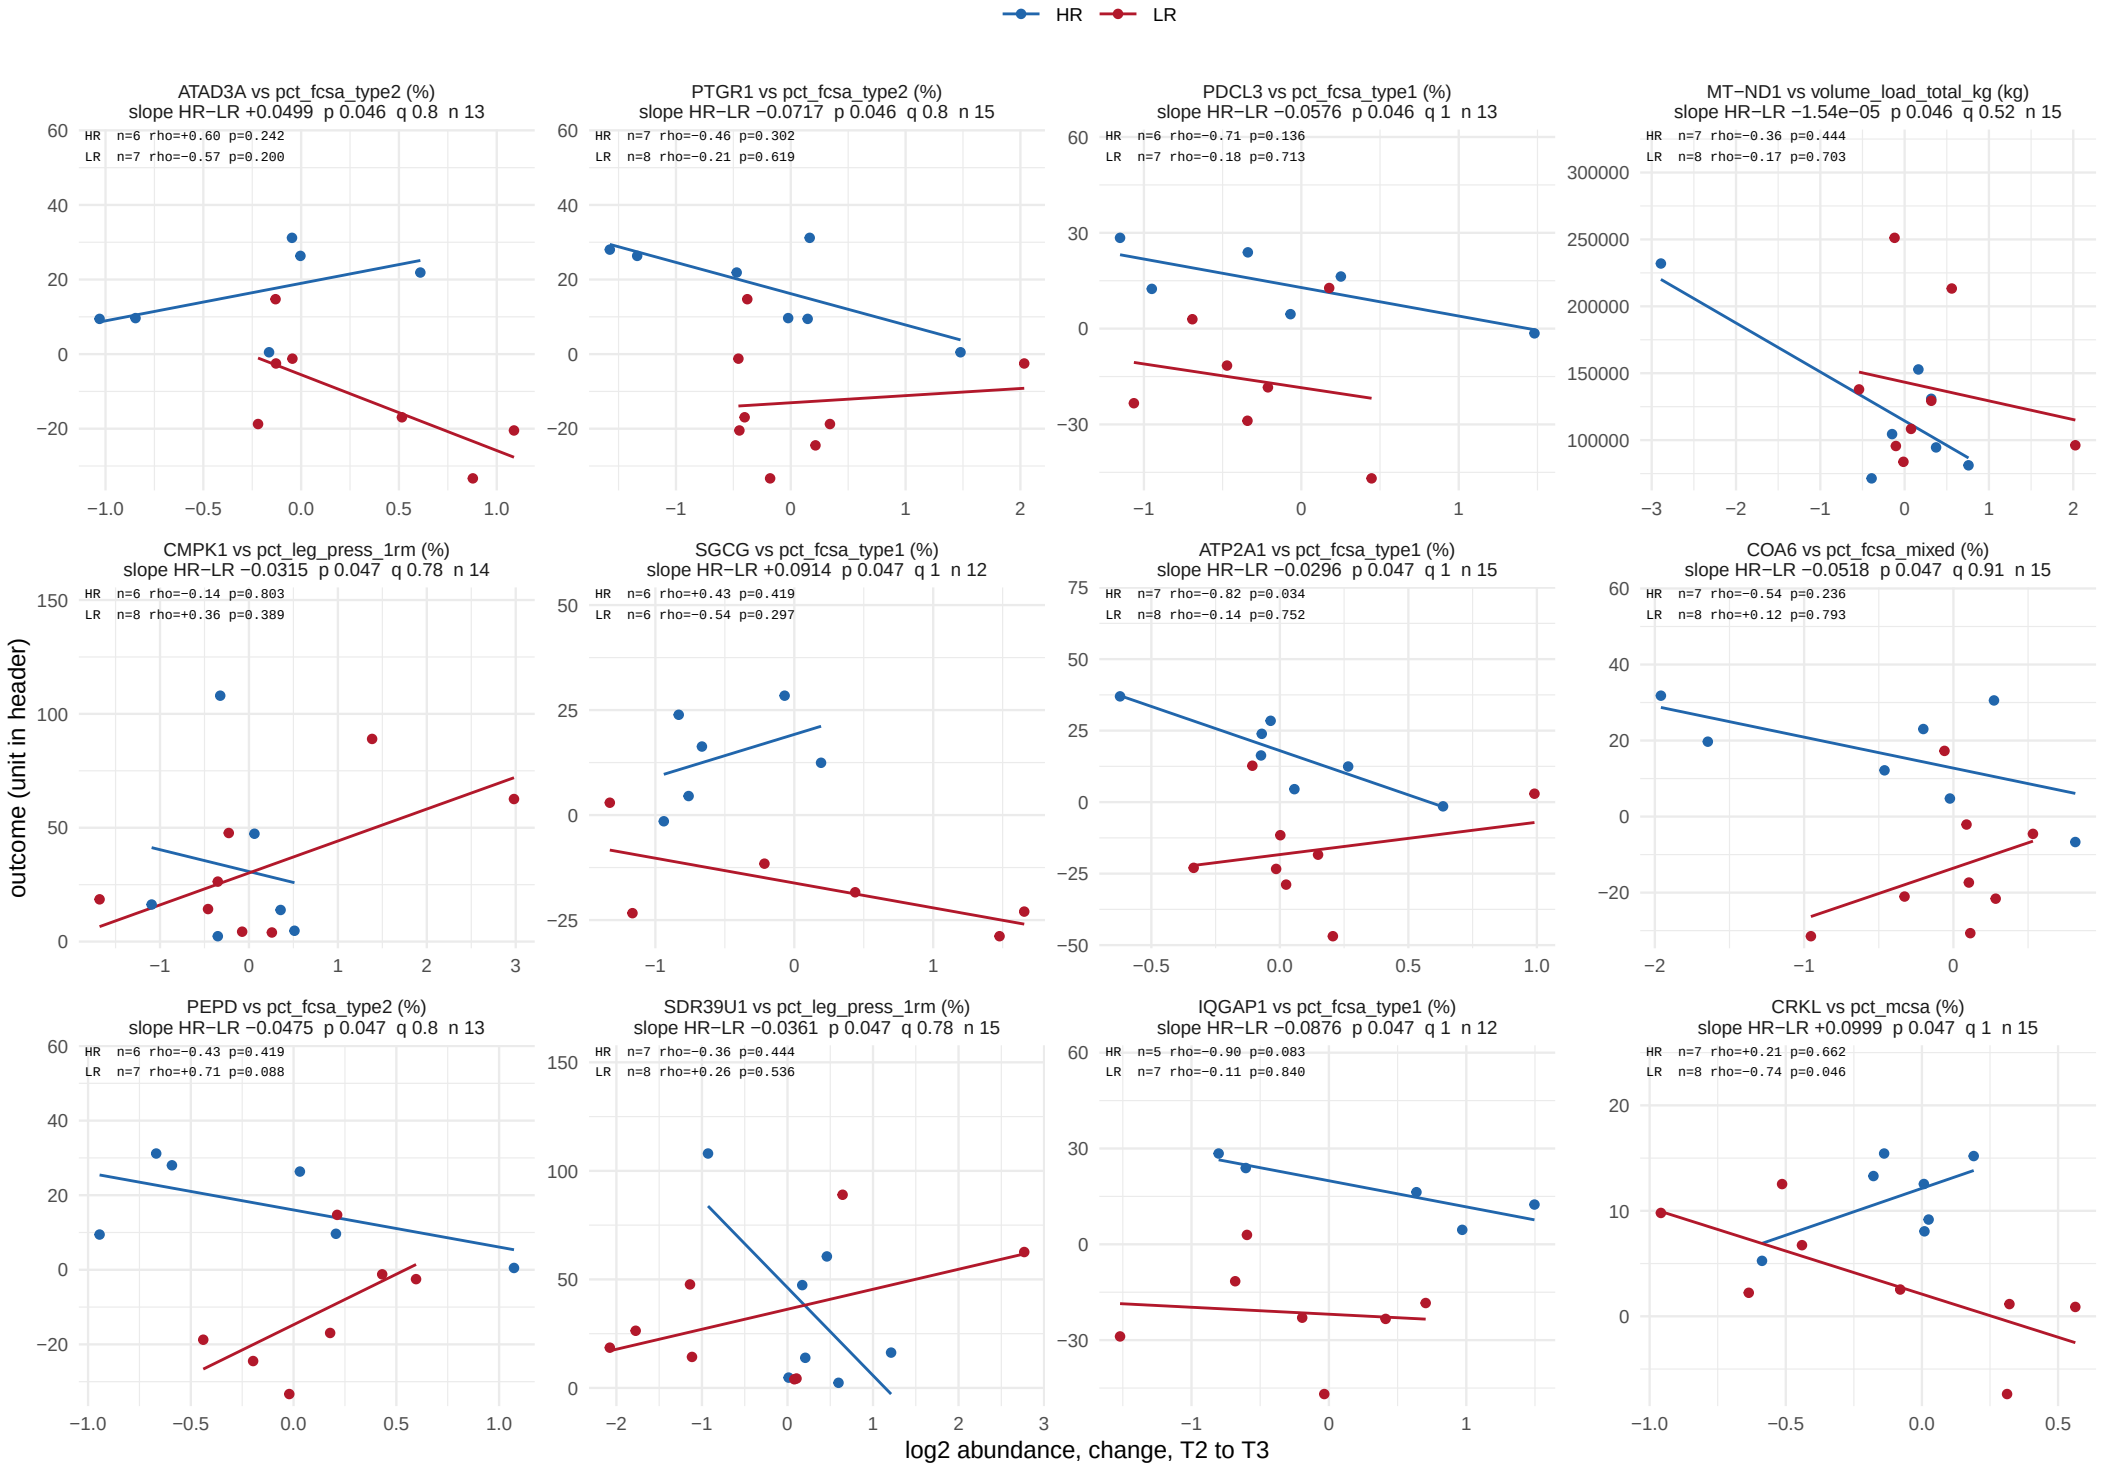

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


482 of 9765 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 39 of 41.

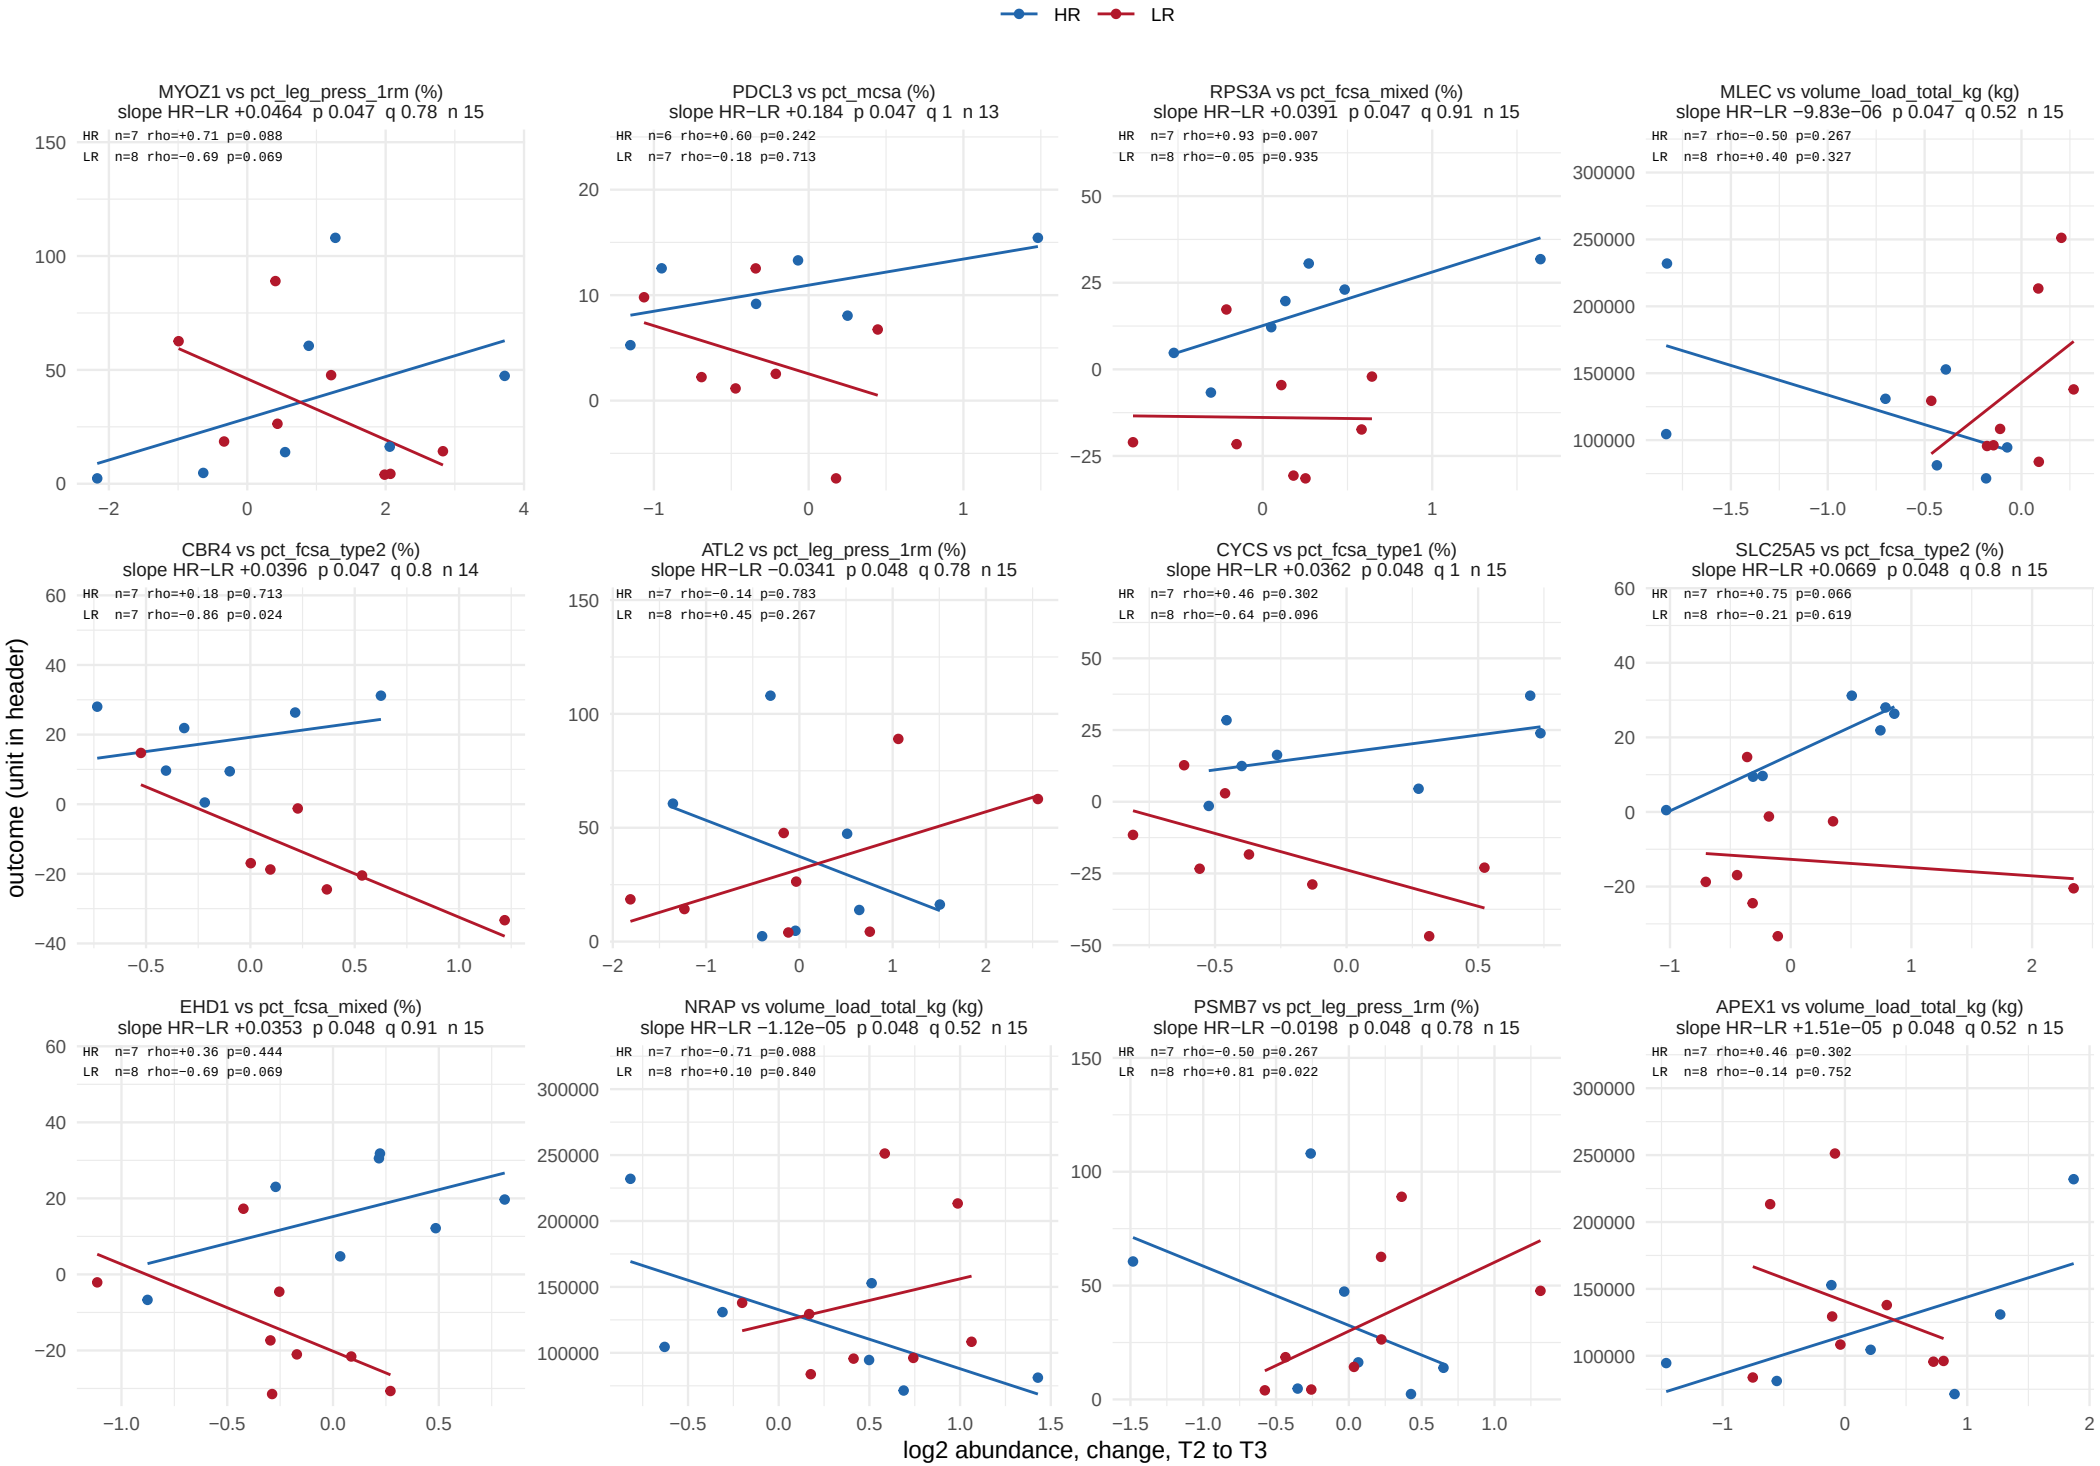

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window


482 of 9765 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 40 of 41.

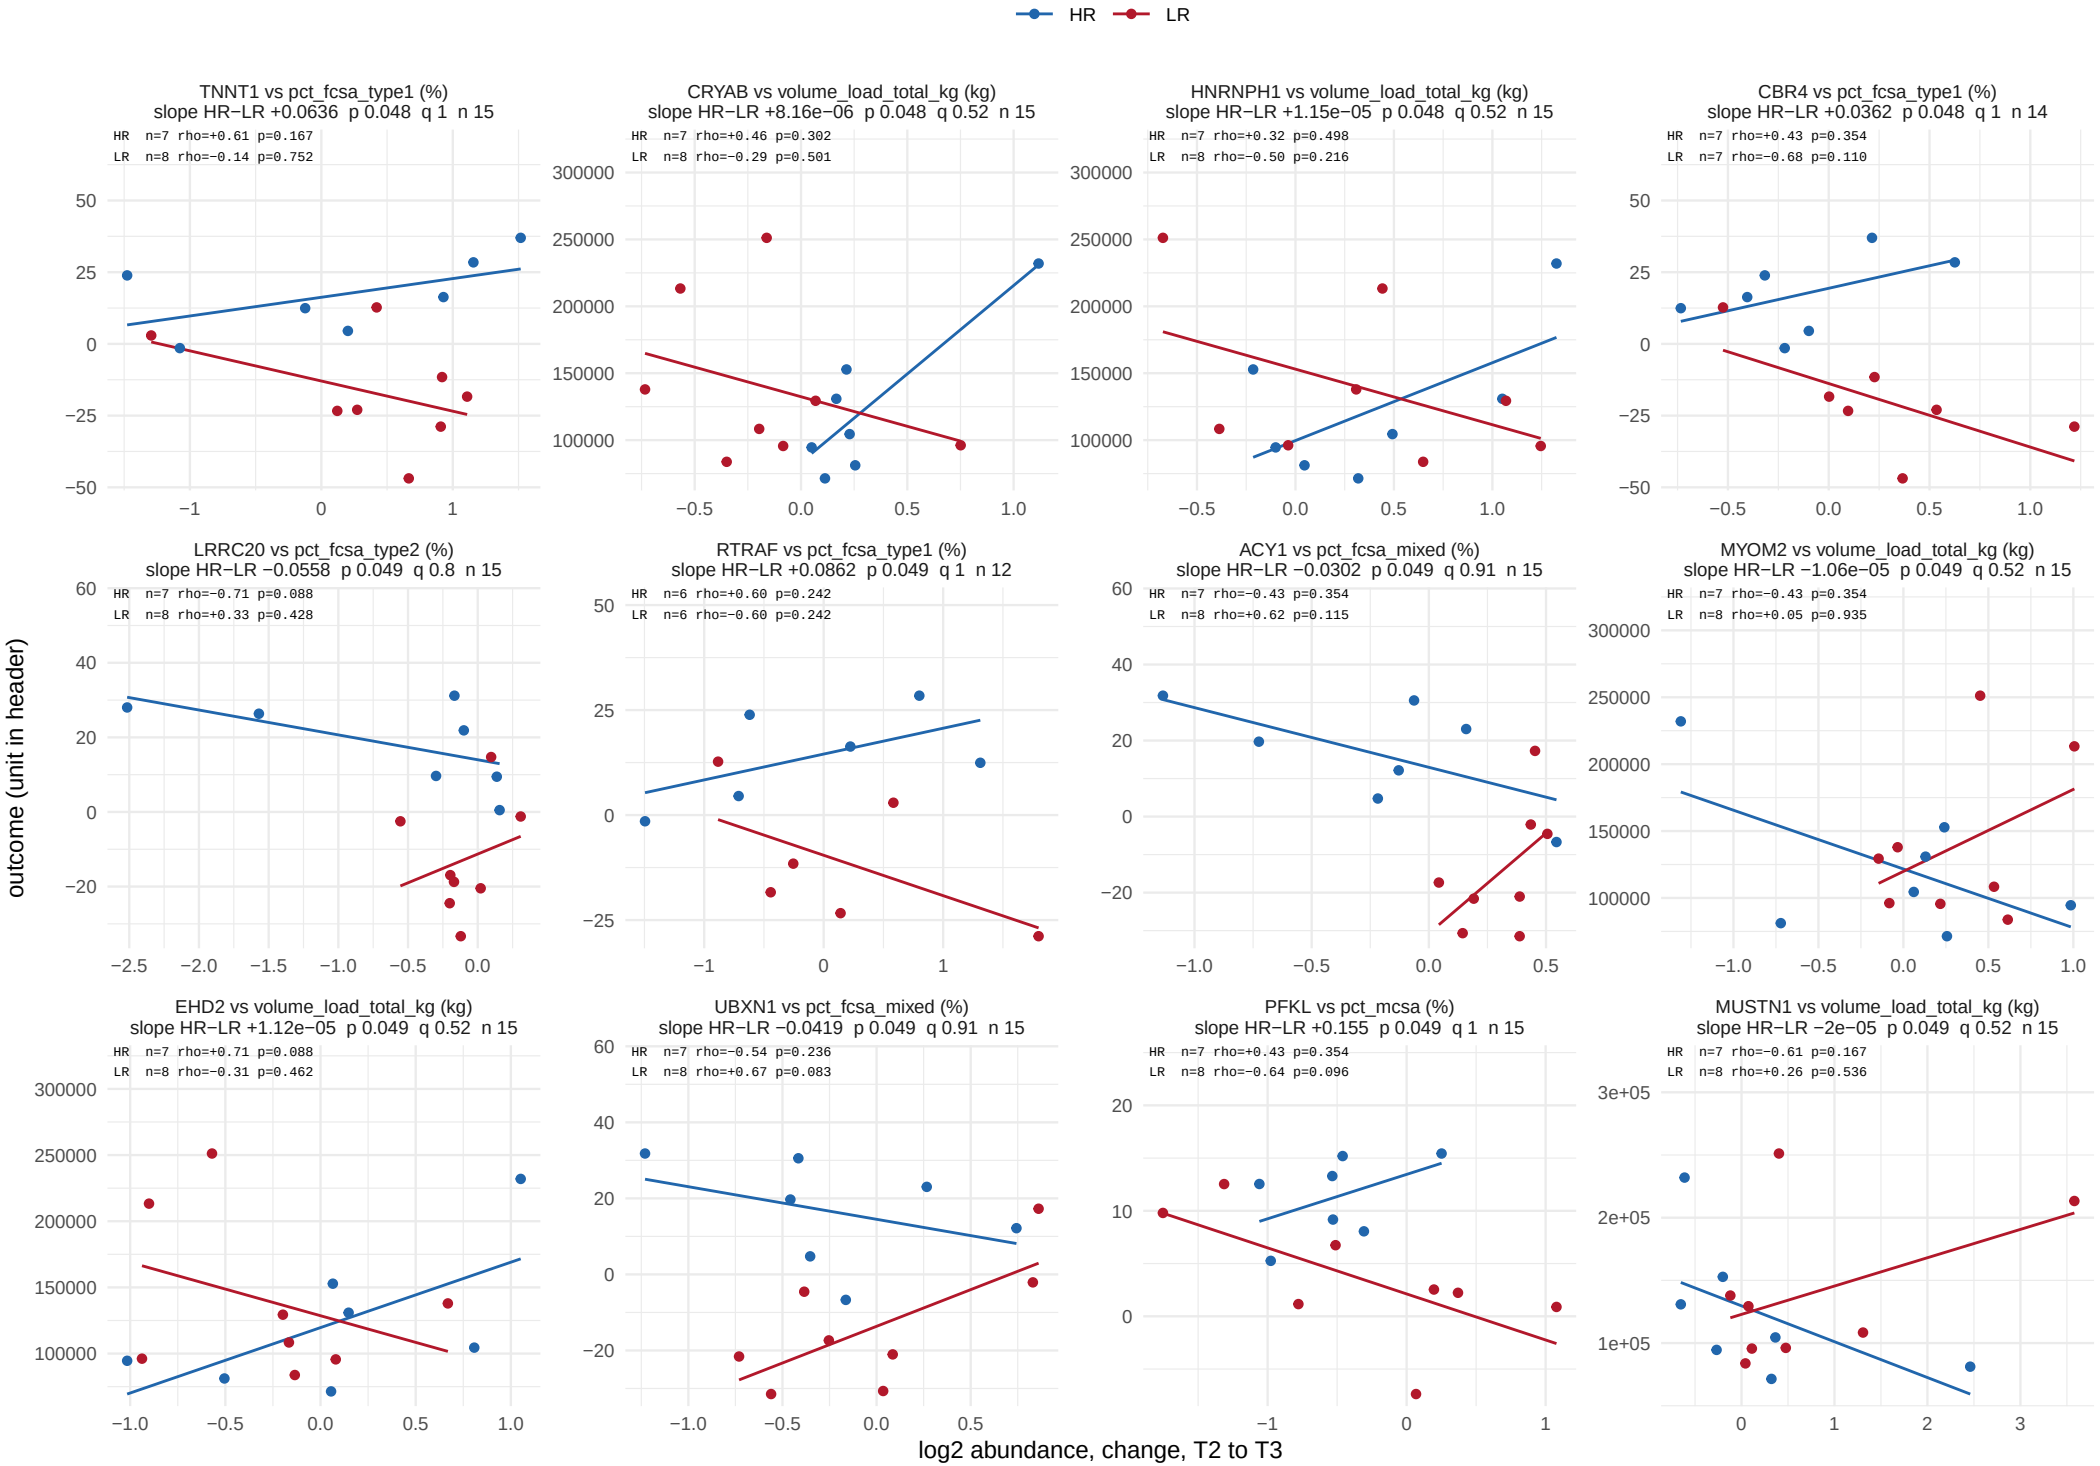

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Arm difference, acute window

482 of 9765 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 41 of 41.

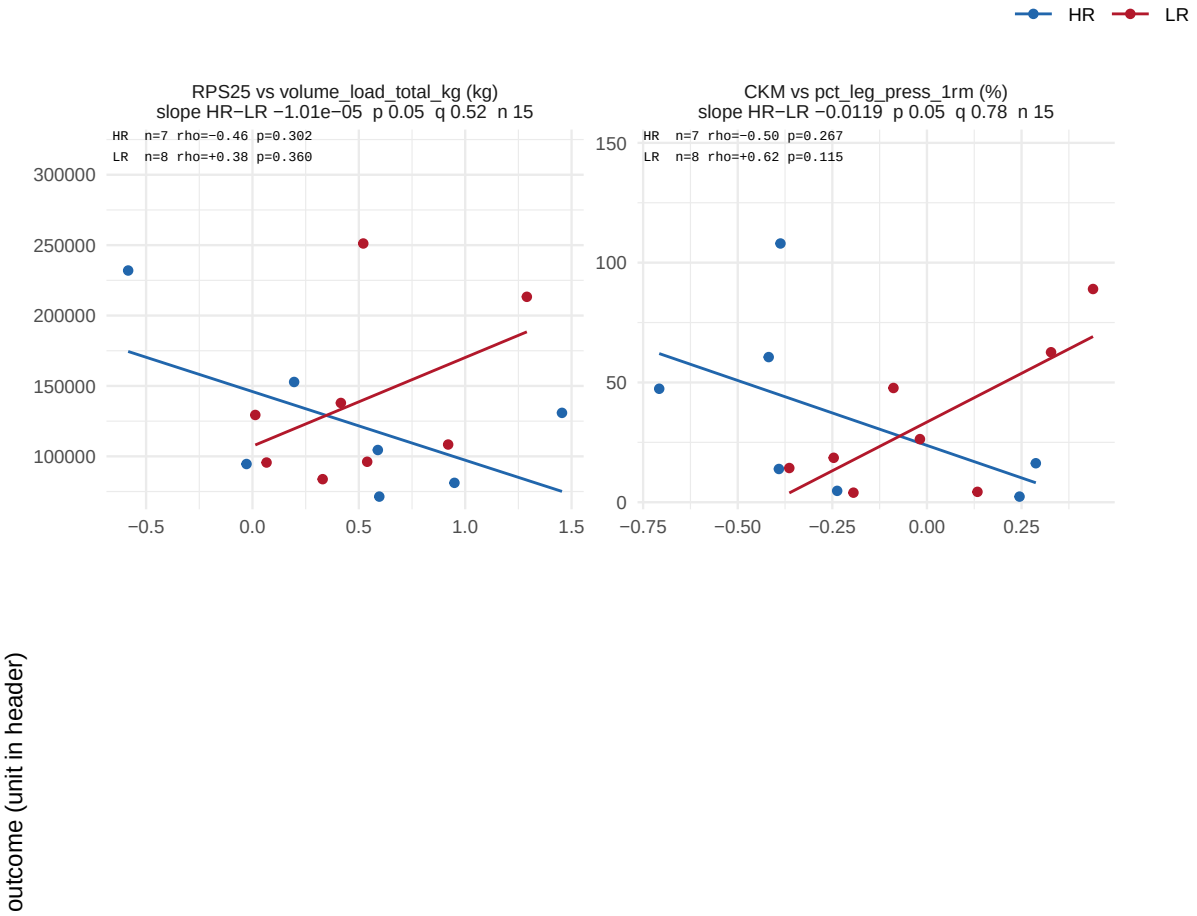


outcome (unit in header)

log2 abundance, change, T2 to T3

One point per subject. Lines are a least−squares fit per arm. Header: HR's slope minus LR's per outcome unit from limma, feature ~ arm * outcome, with p, BH q within window, outcome, and the subjects used. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, arm_difference.

Two predictor, training window


231 of 5676 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 1 of 20.

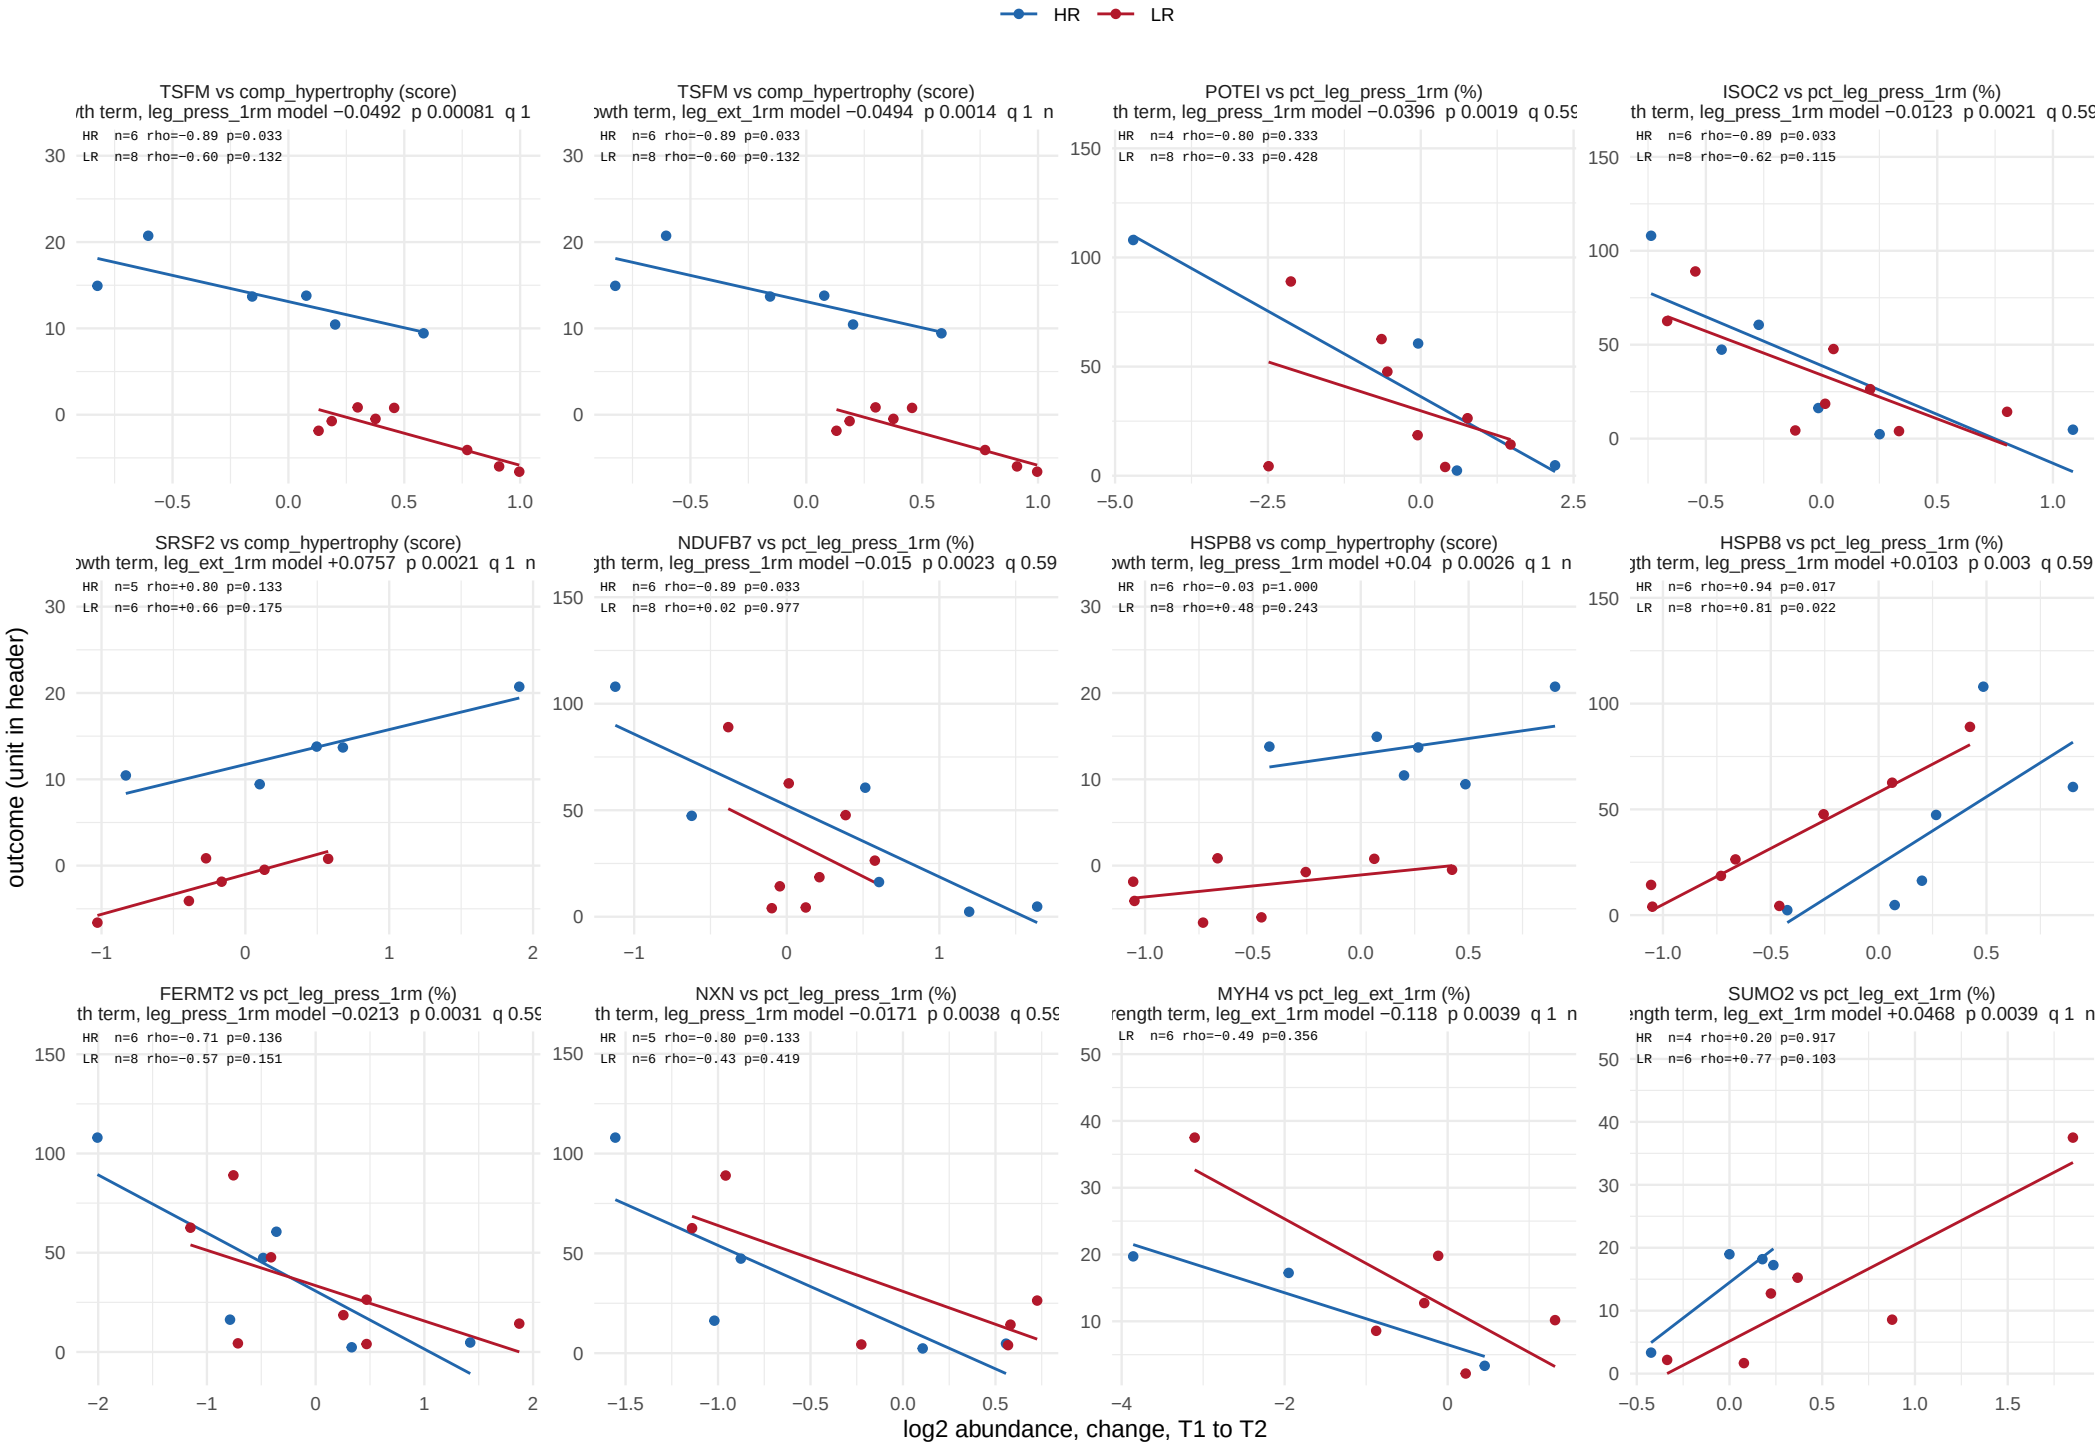

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, training window


231 of 5676 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 2 of 20.

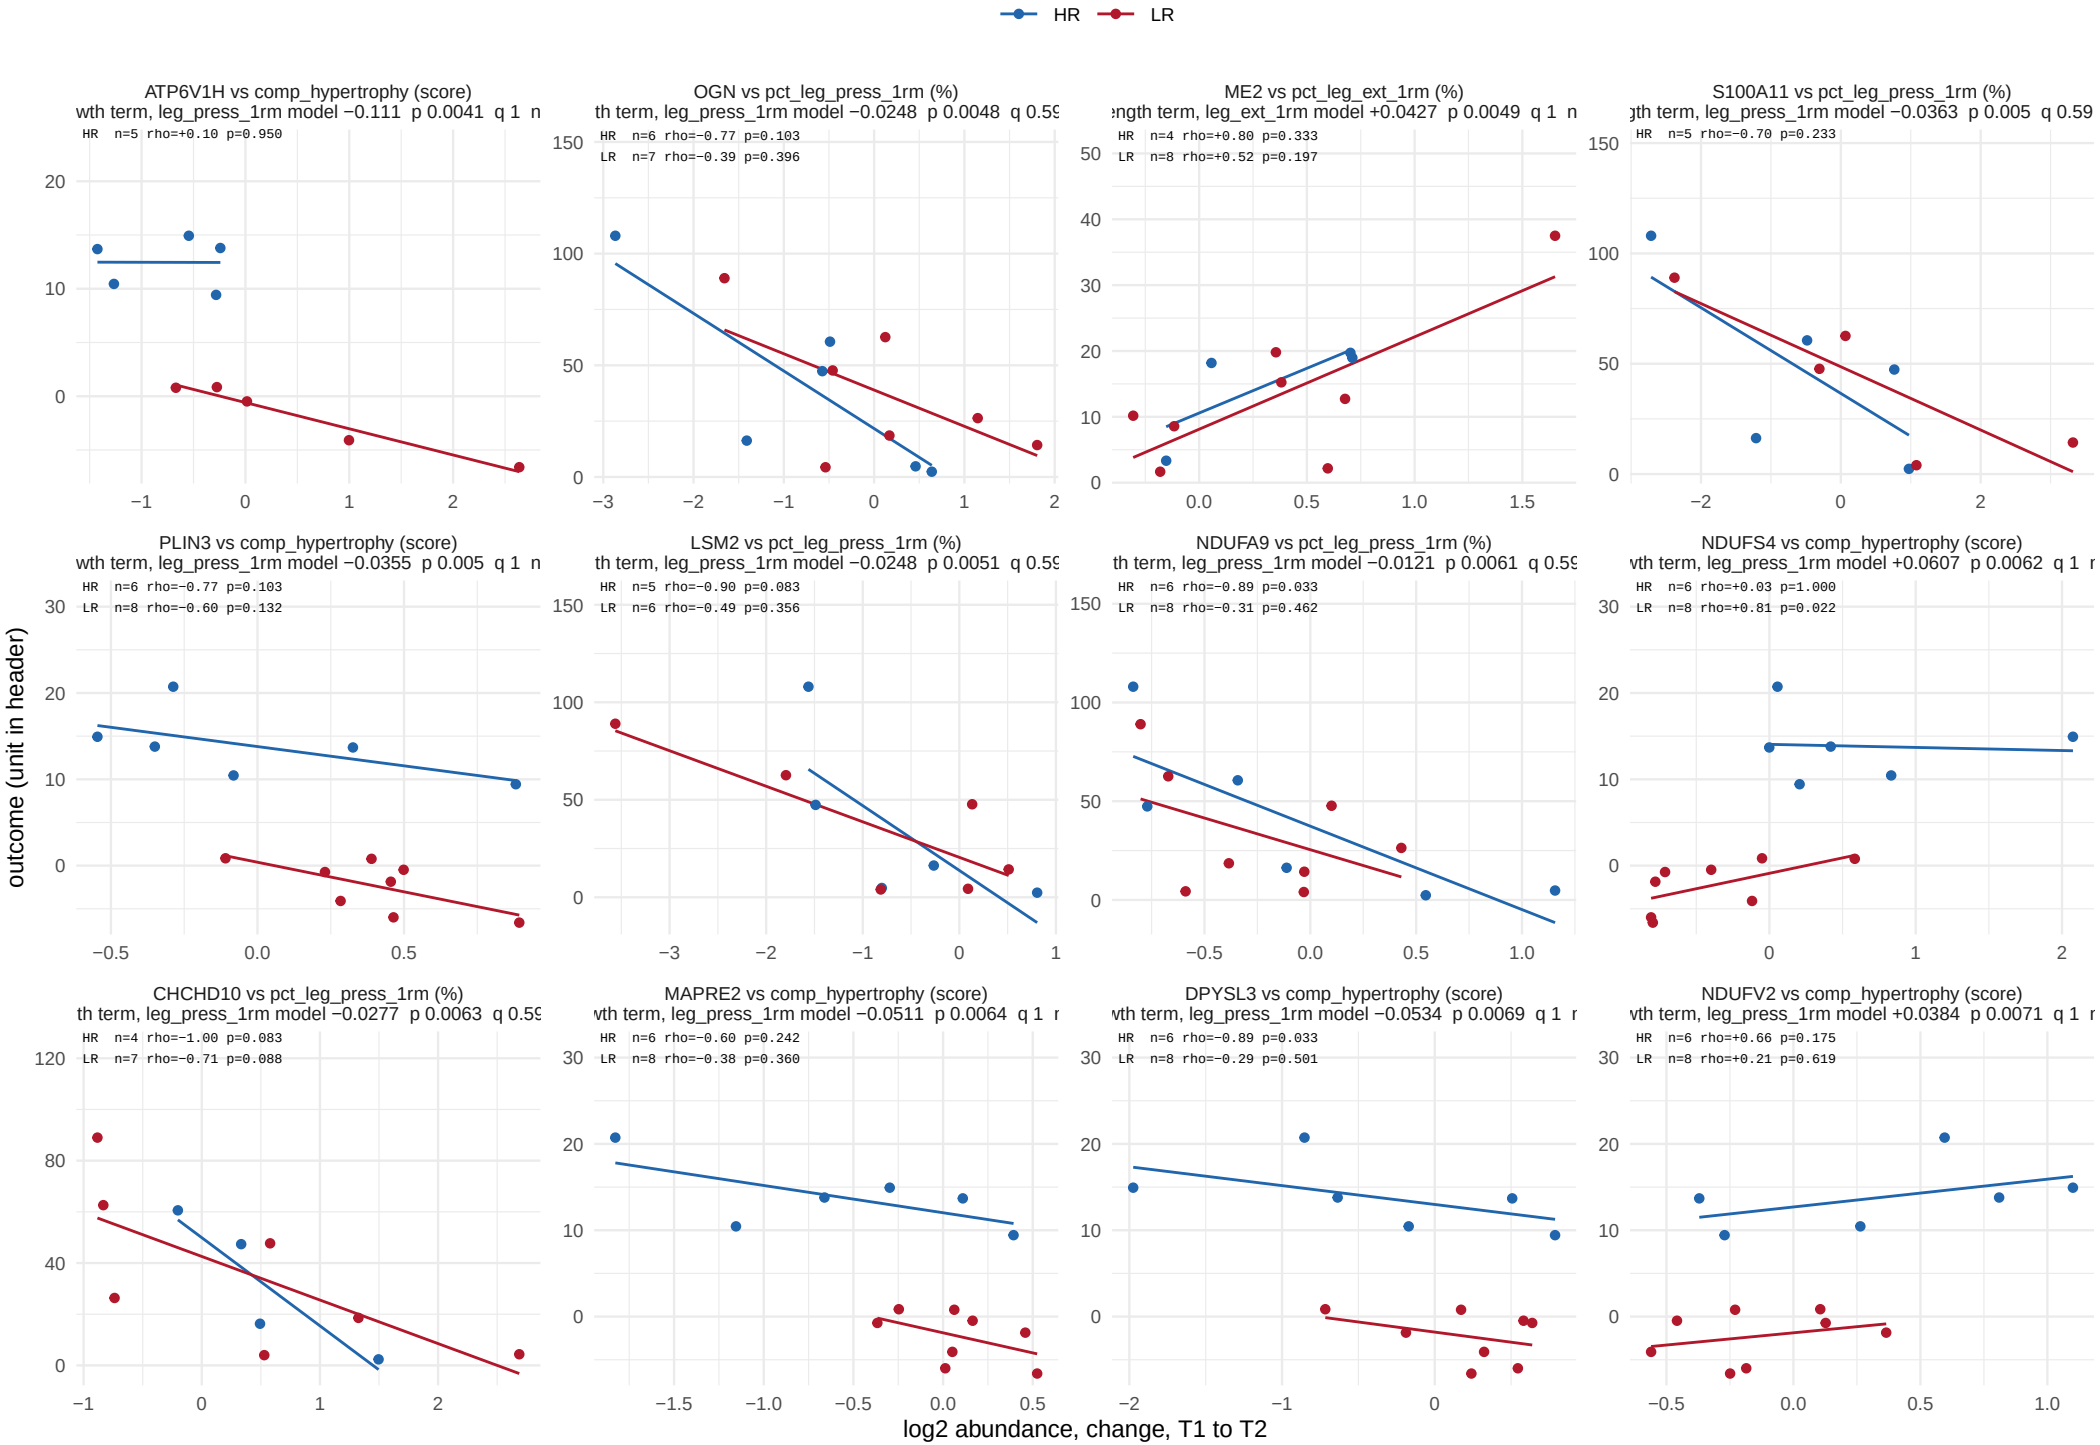

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, training window


231 of 5676 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 3 of 20.

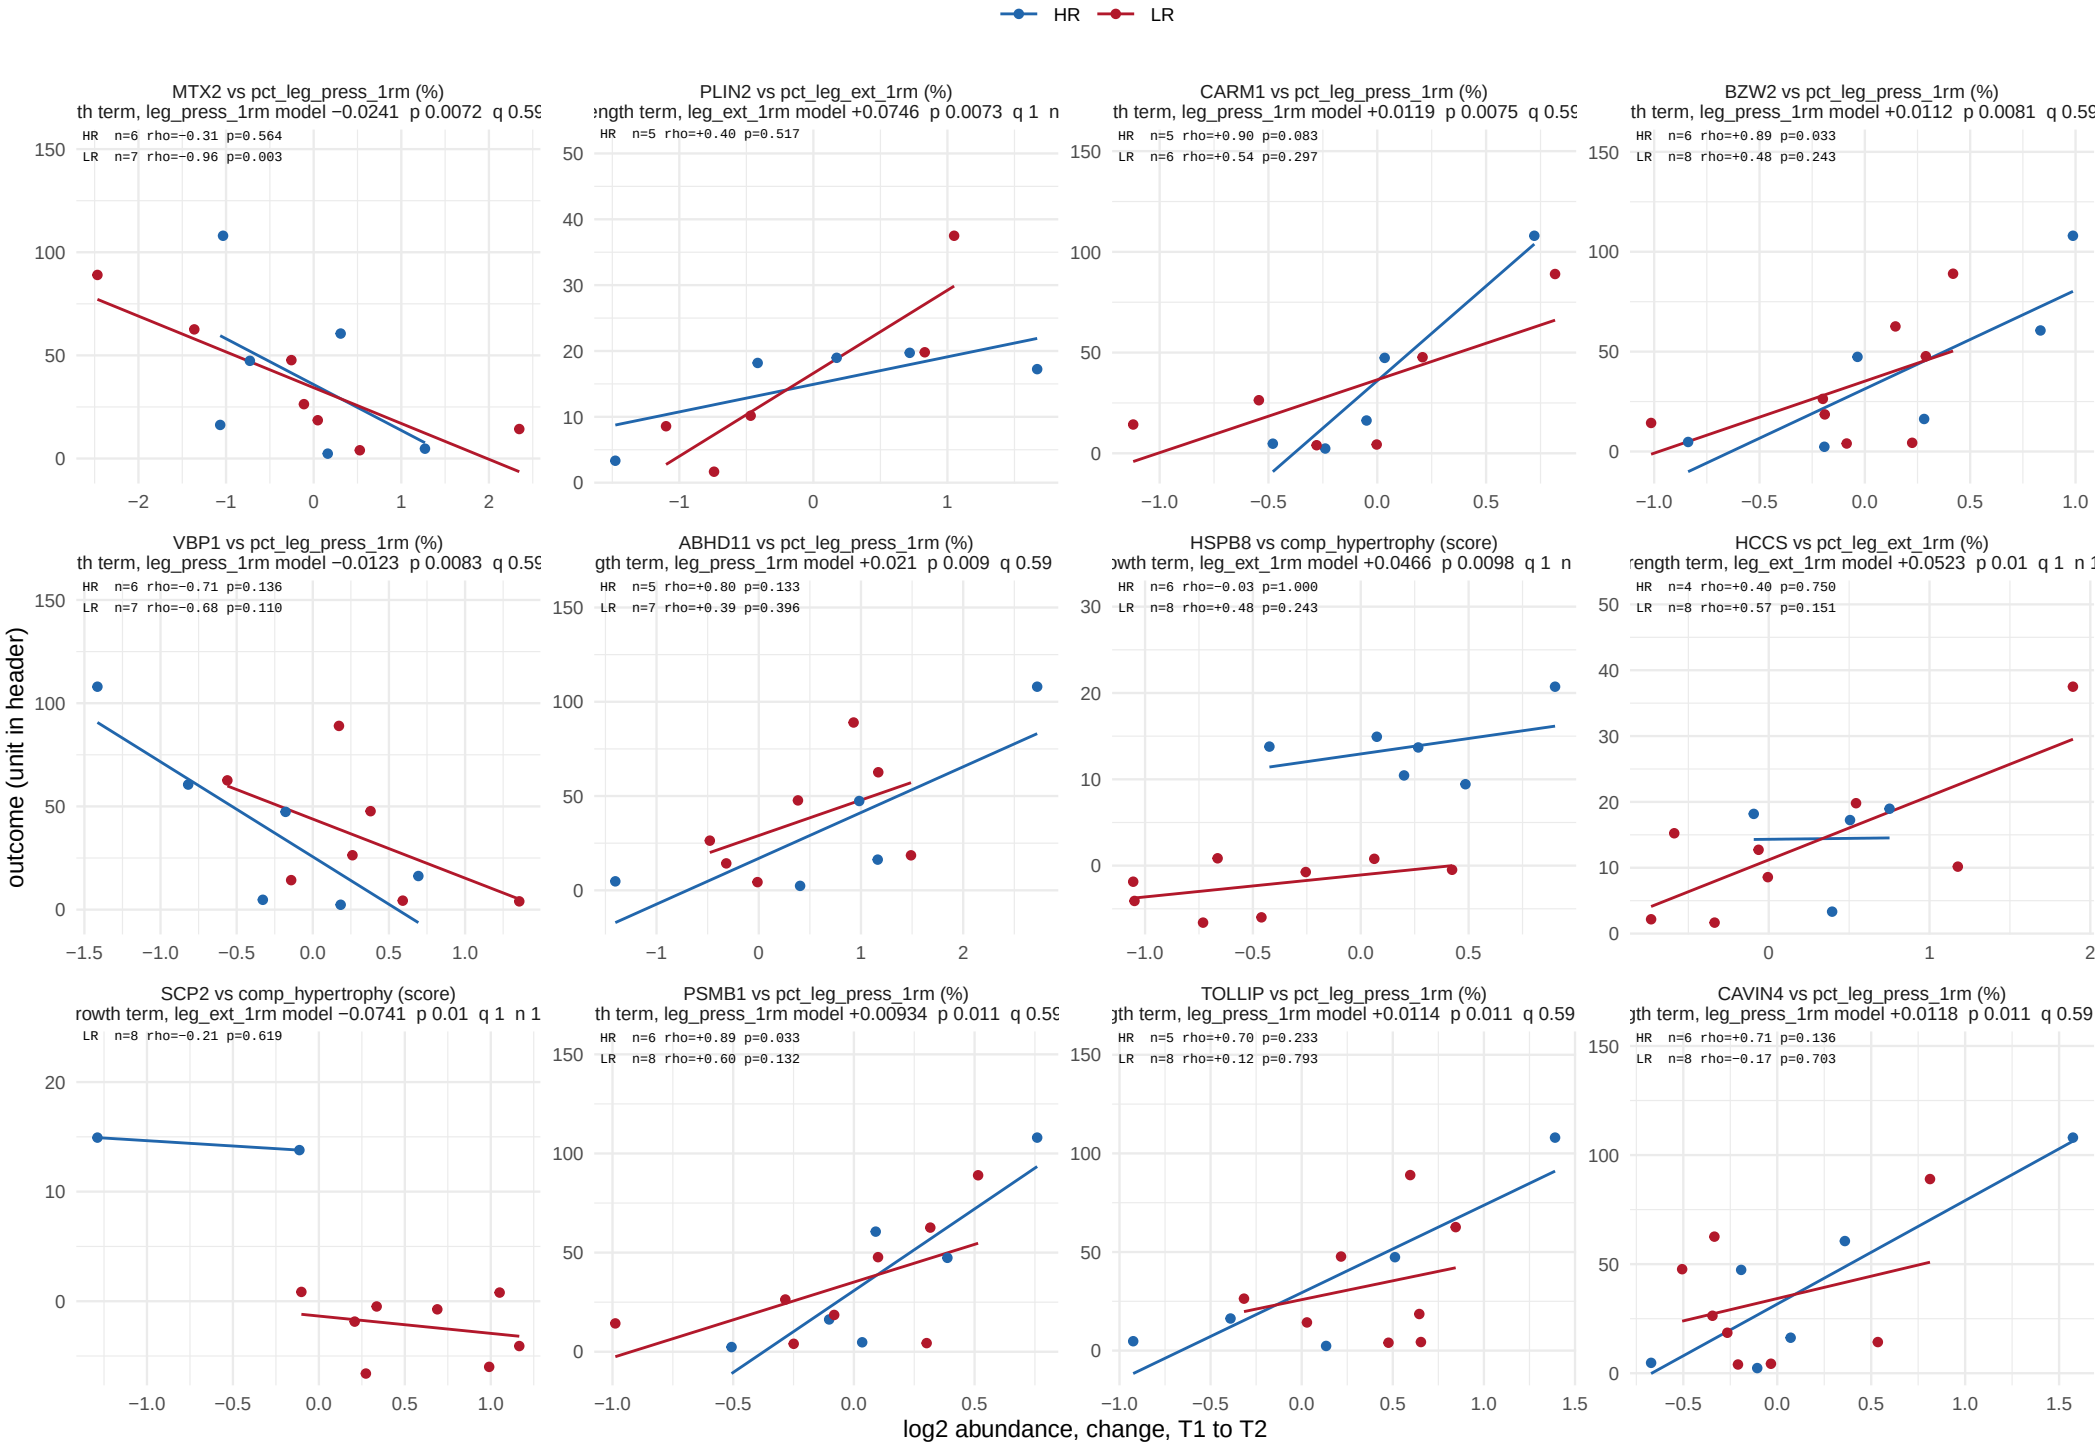

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, training window


231 of 5676 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 4 of 20.

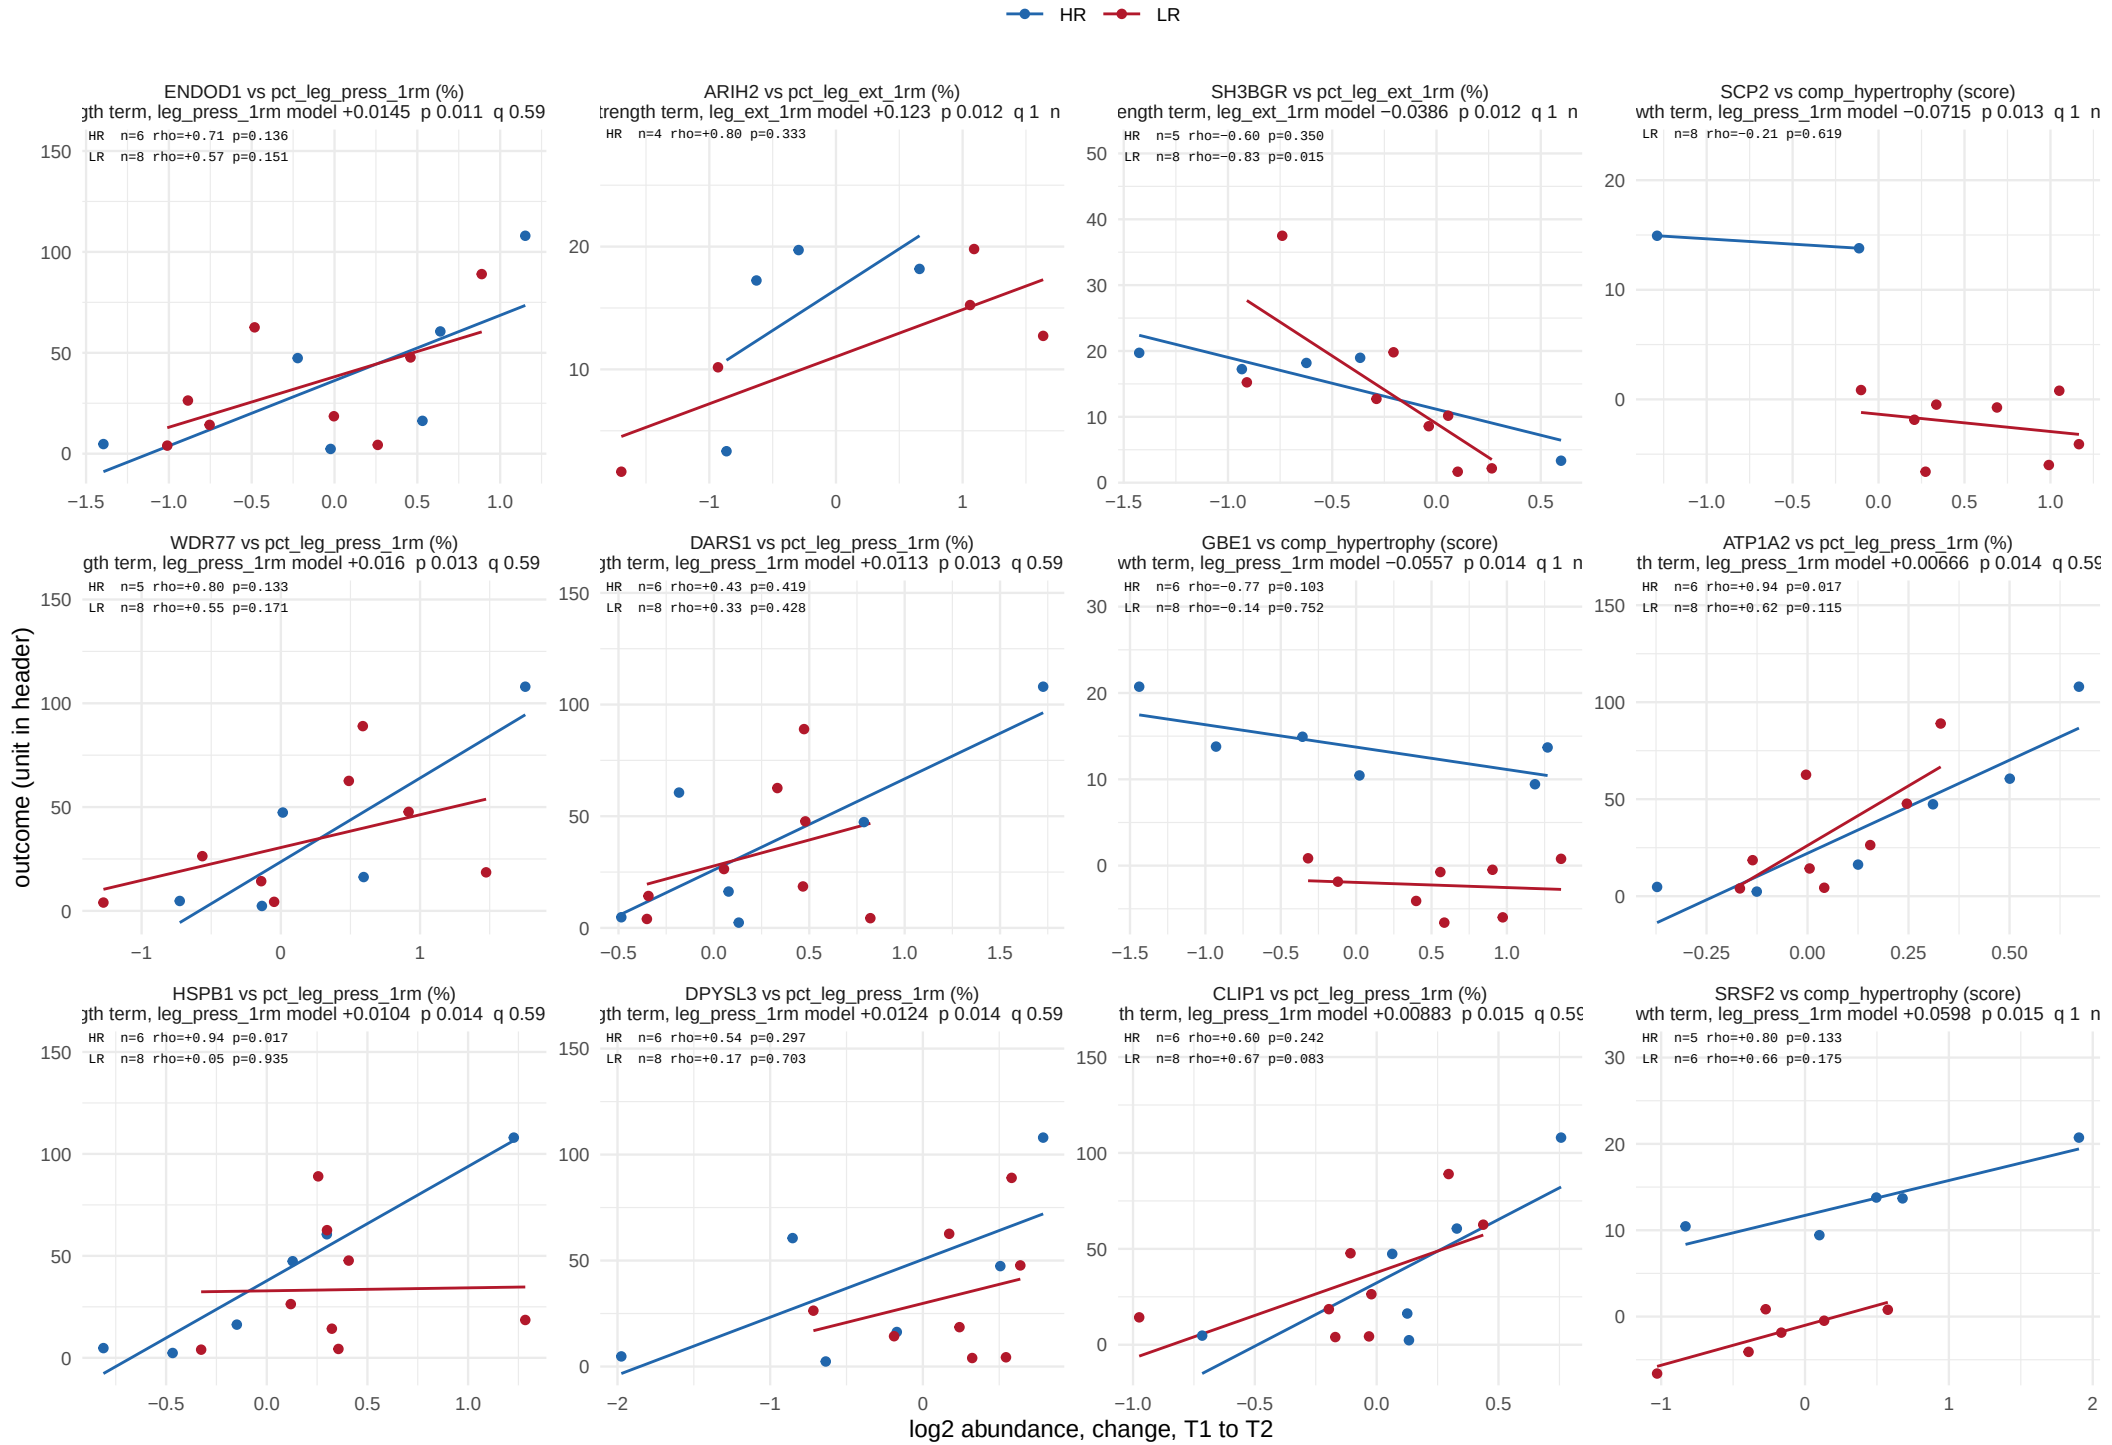

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, training window


231 of 5676 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 5 of 20.

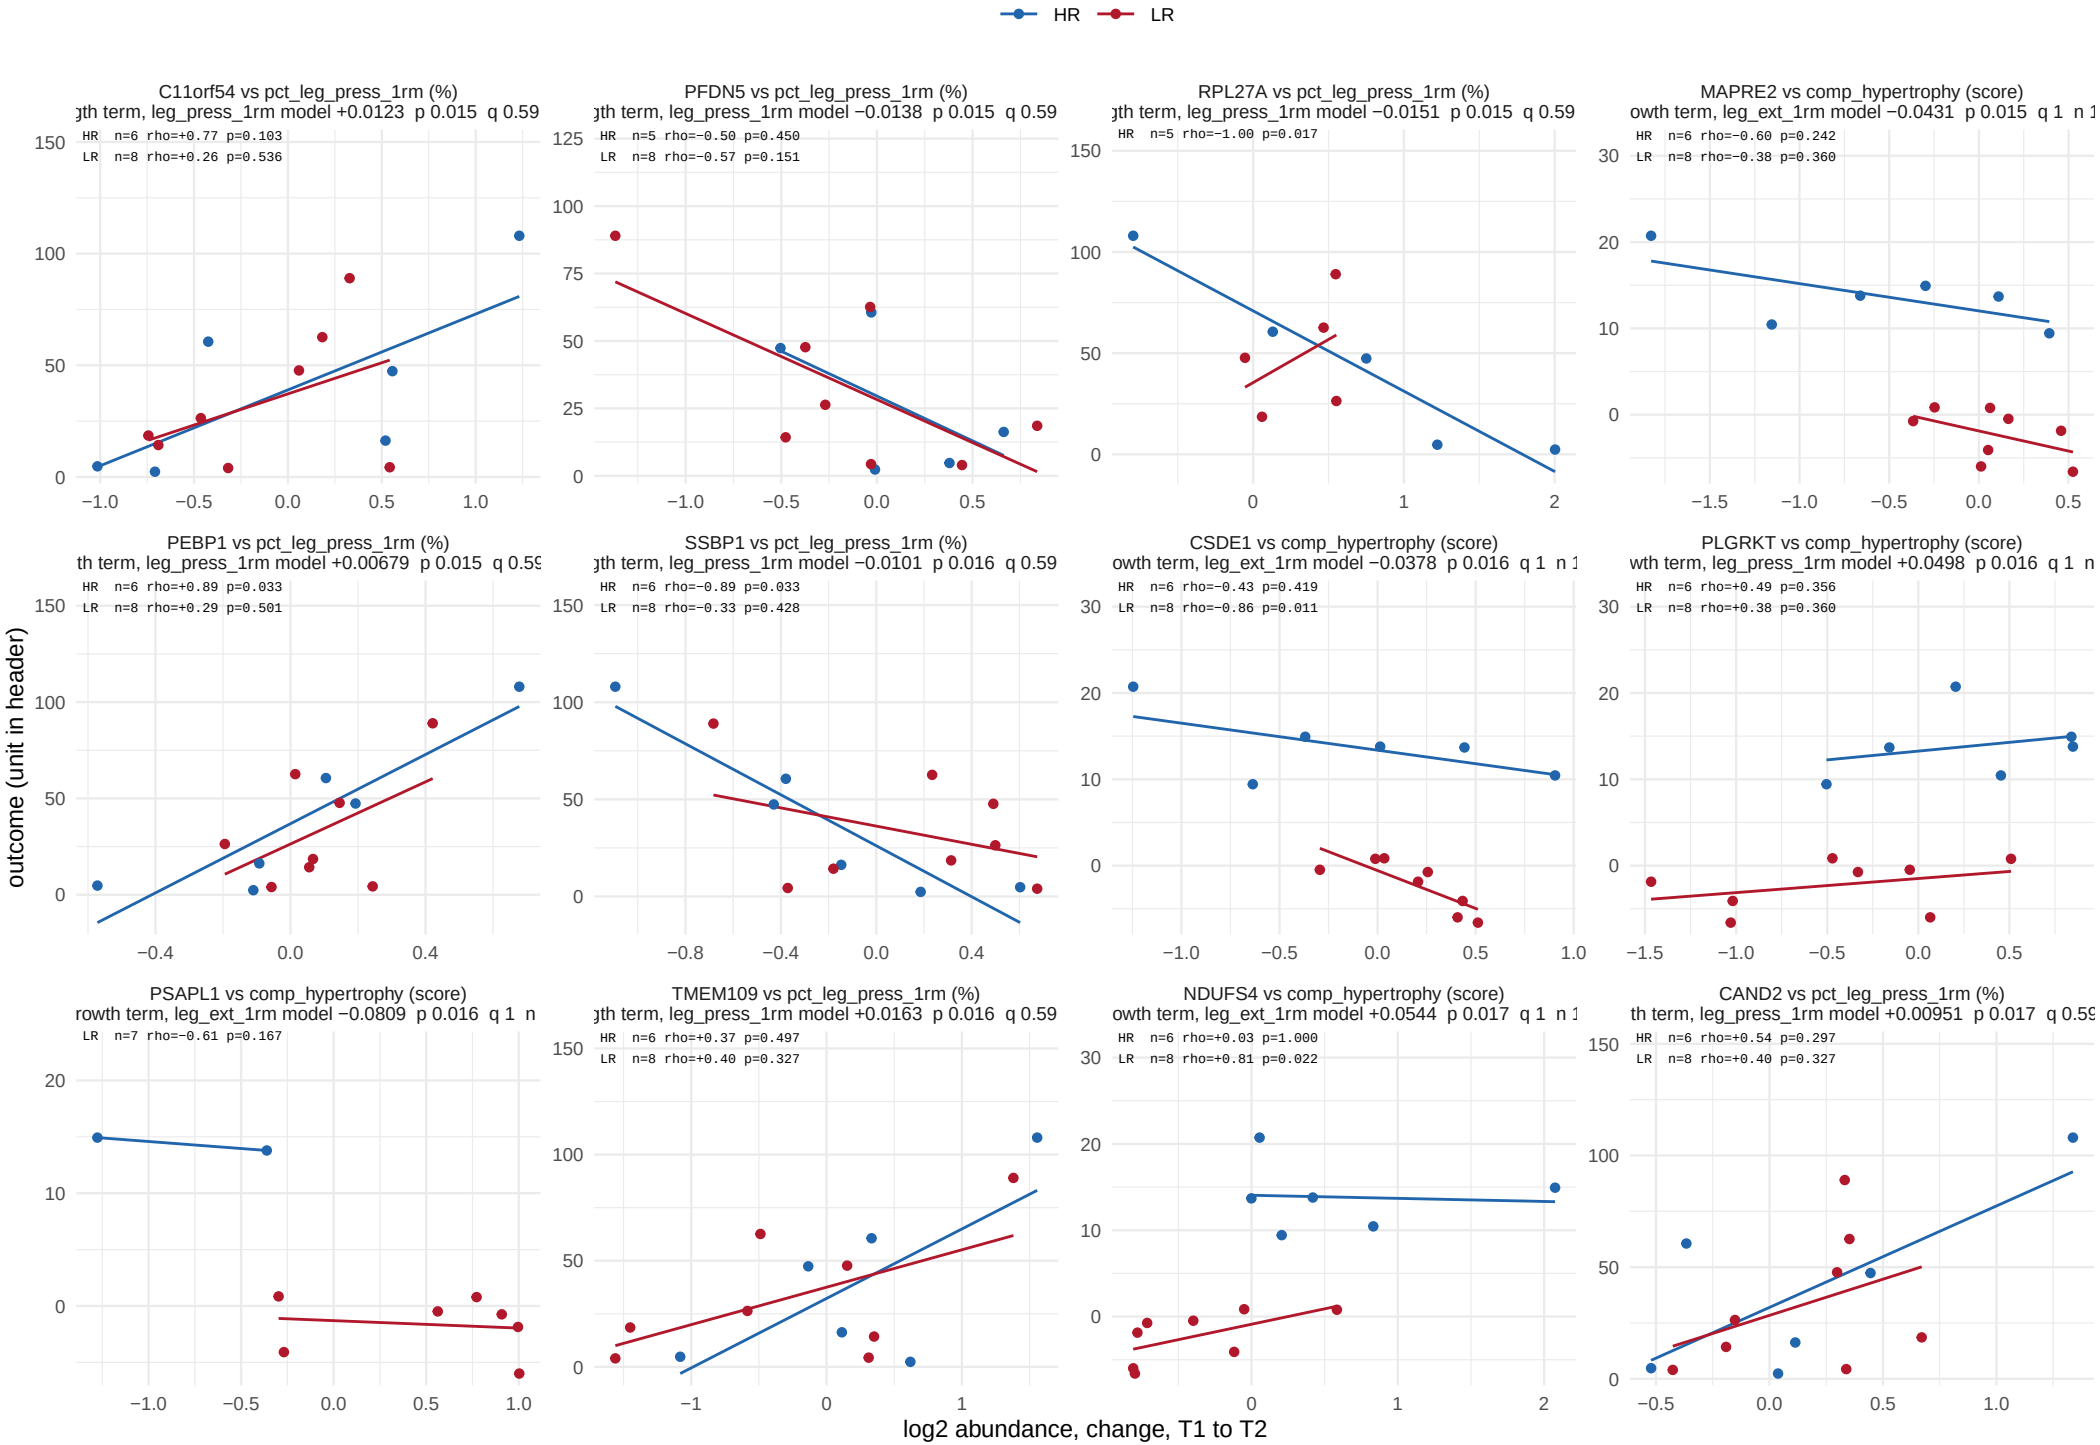

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, training window


231 of 5676 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 6 of 20.

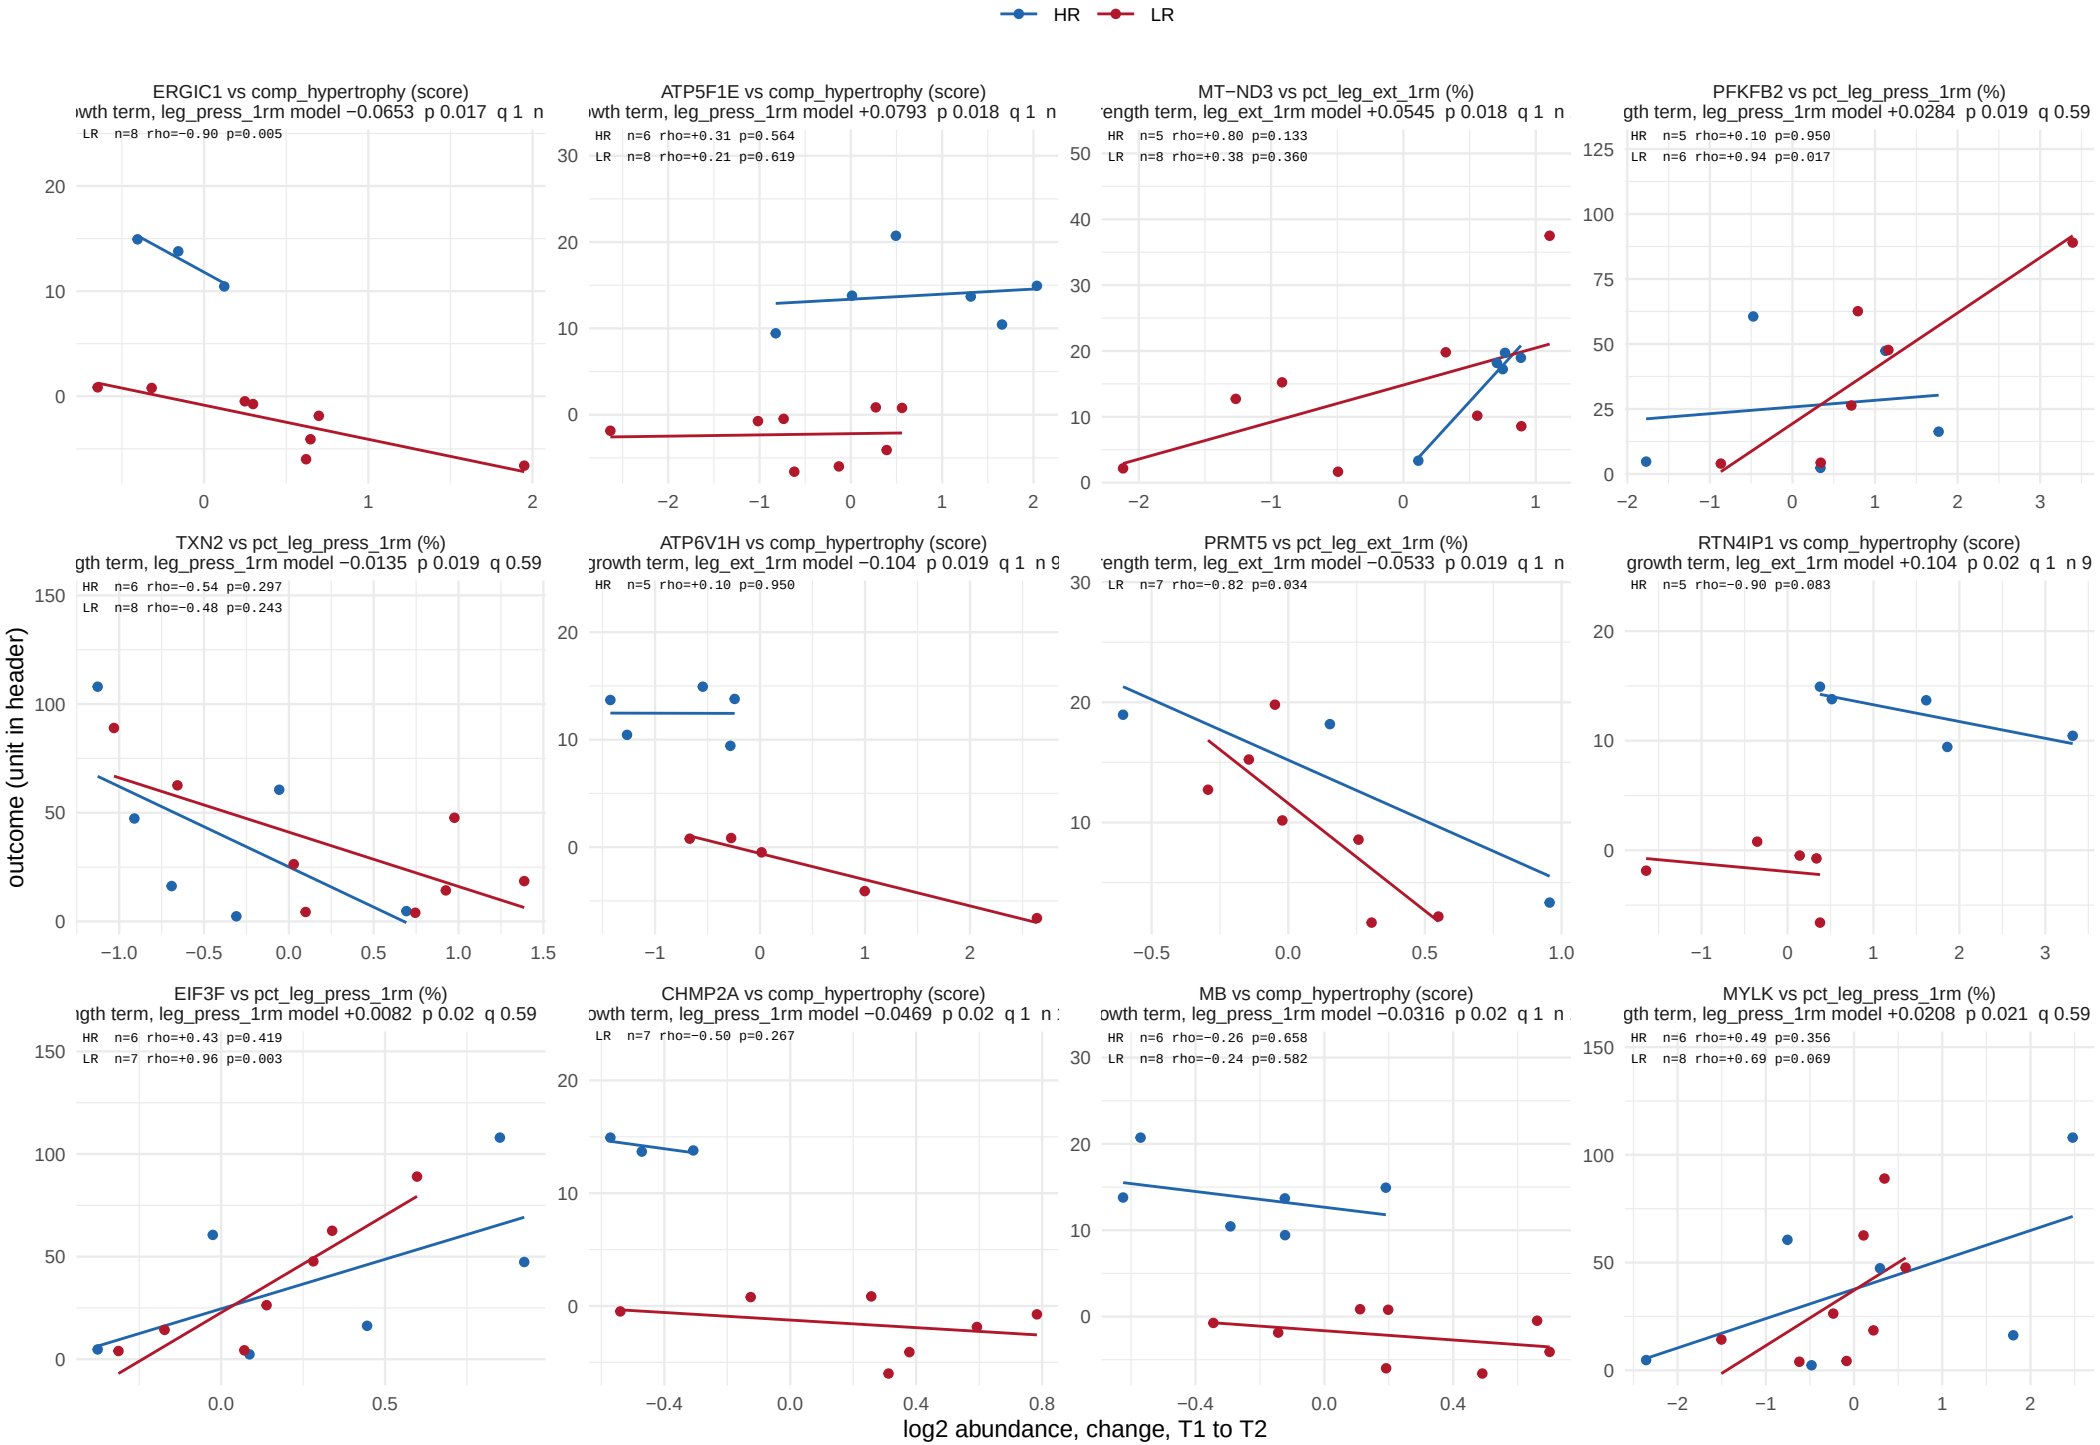

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, training window


231 of 5676 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 7 of 20.

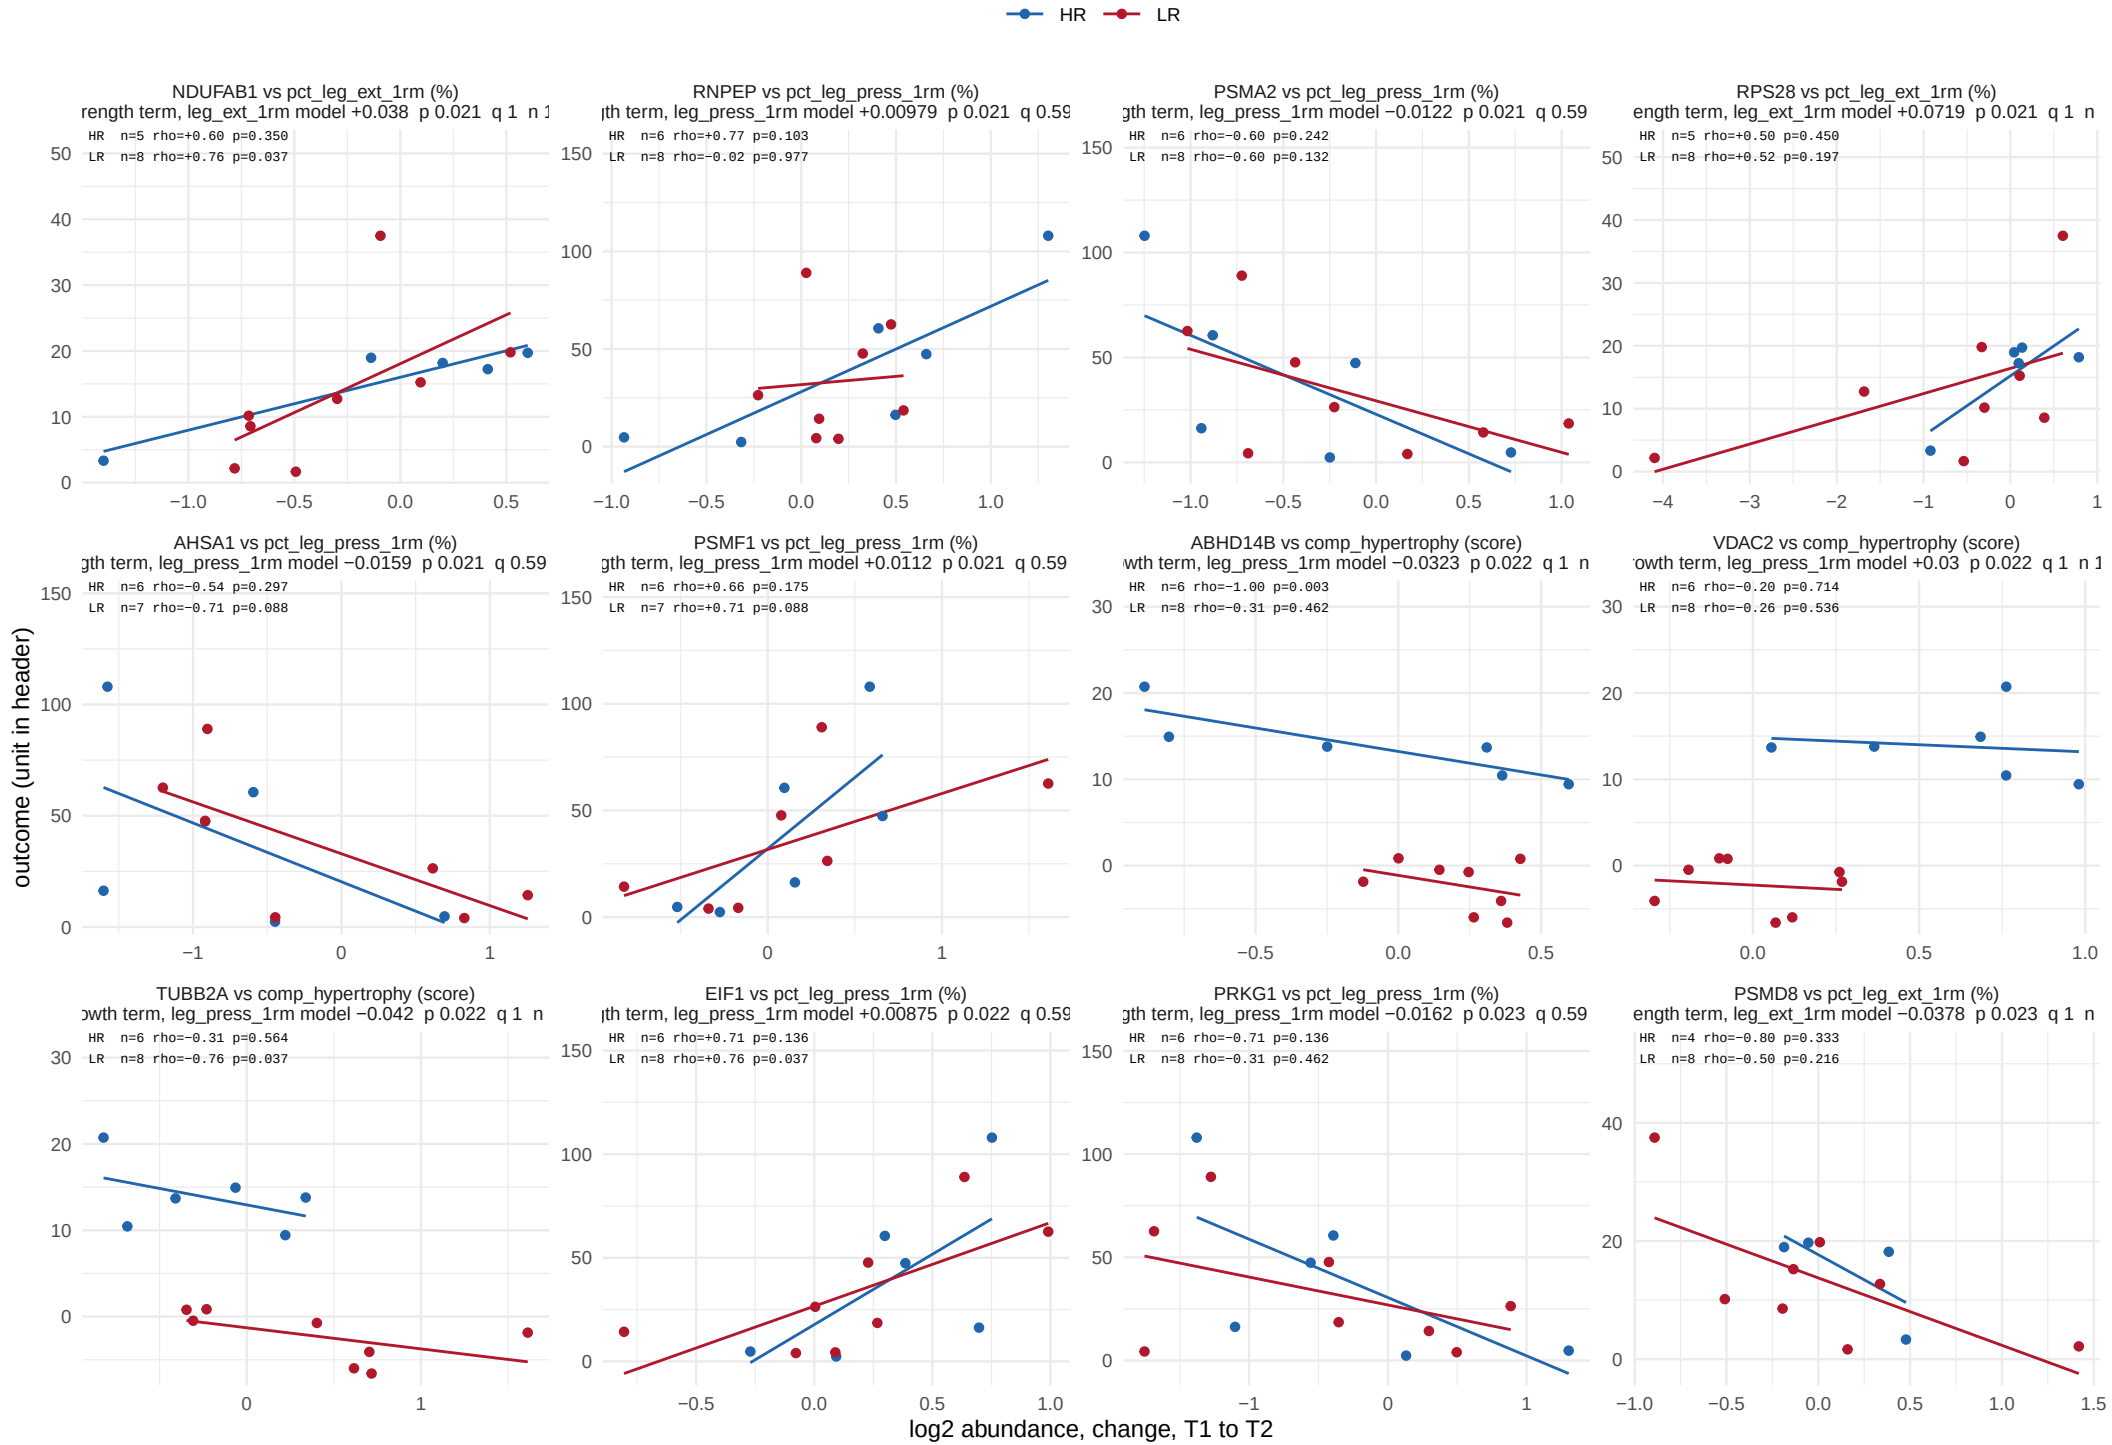

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, training window


231 of 5676 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 8 of 20.

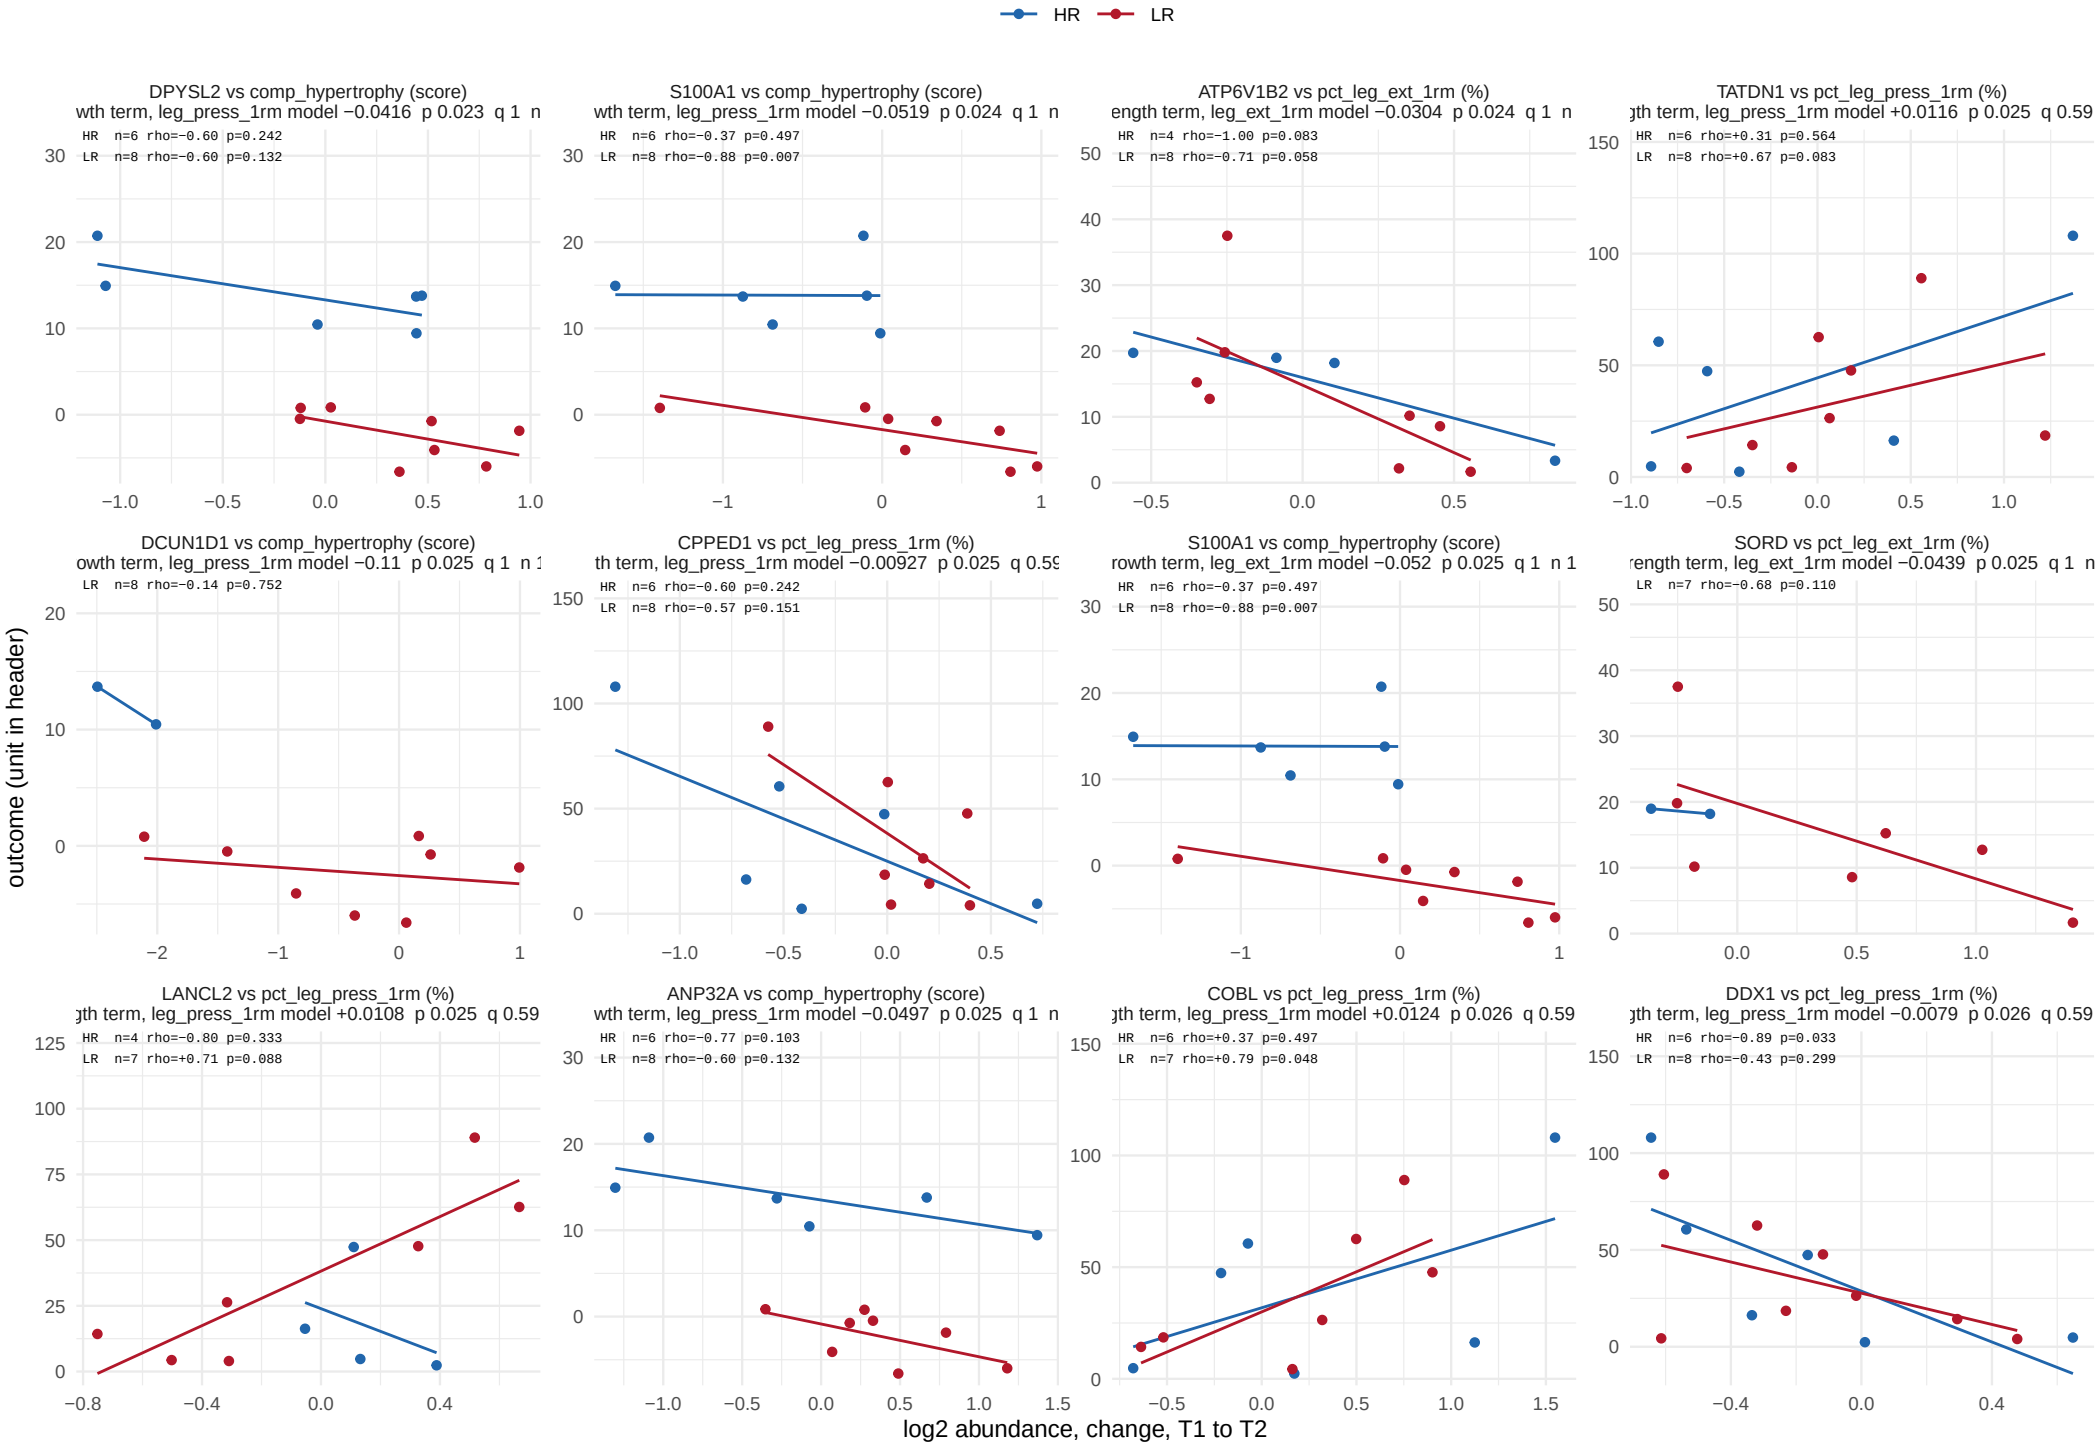

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, training window


231 of 5676 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 9 of 20.

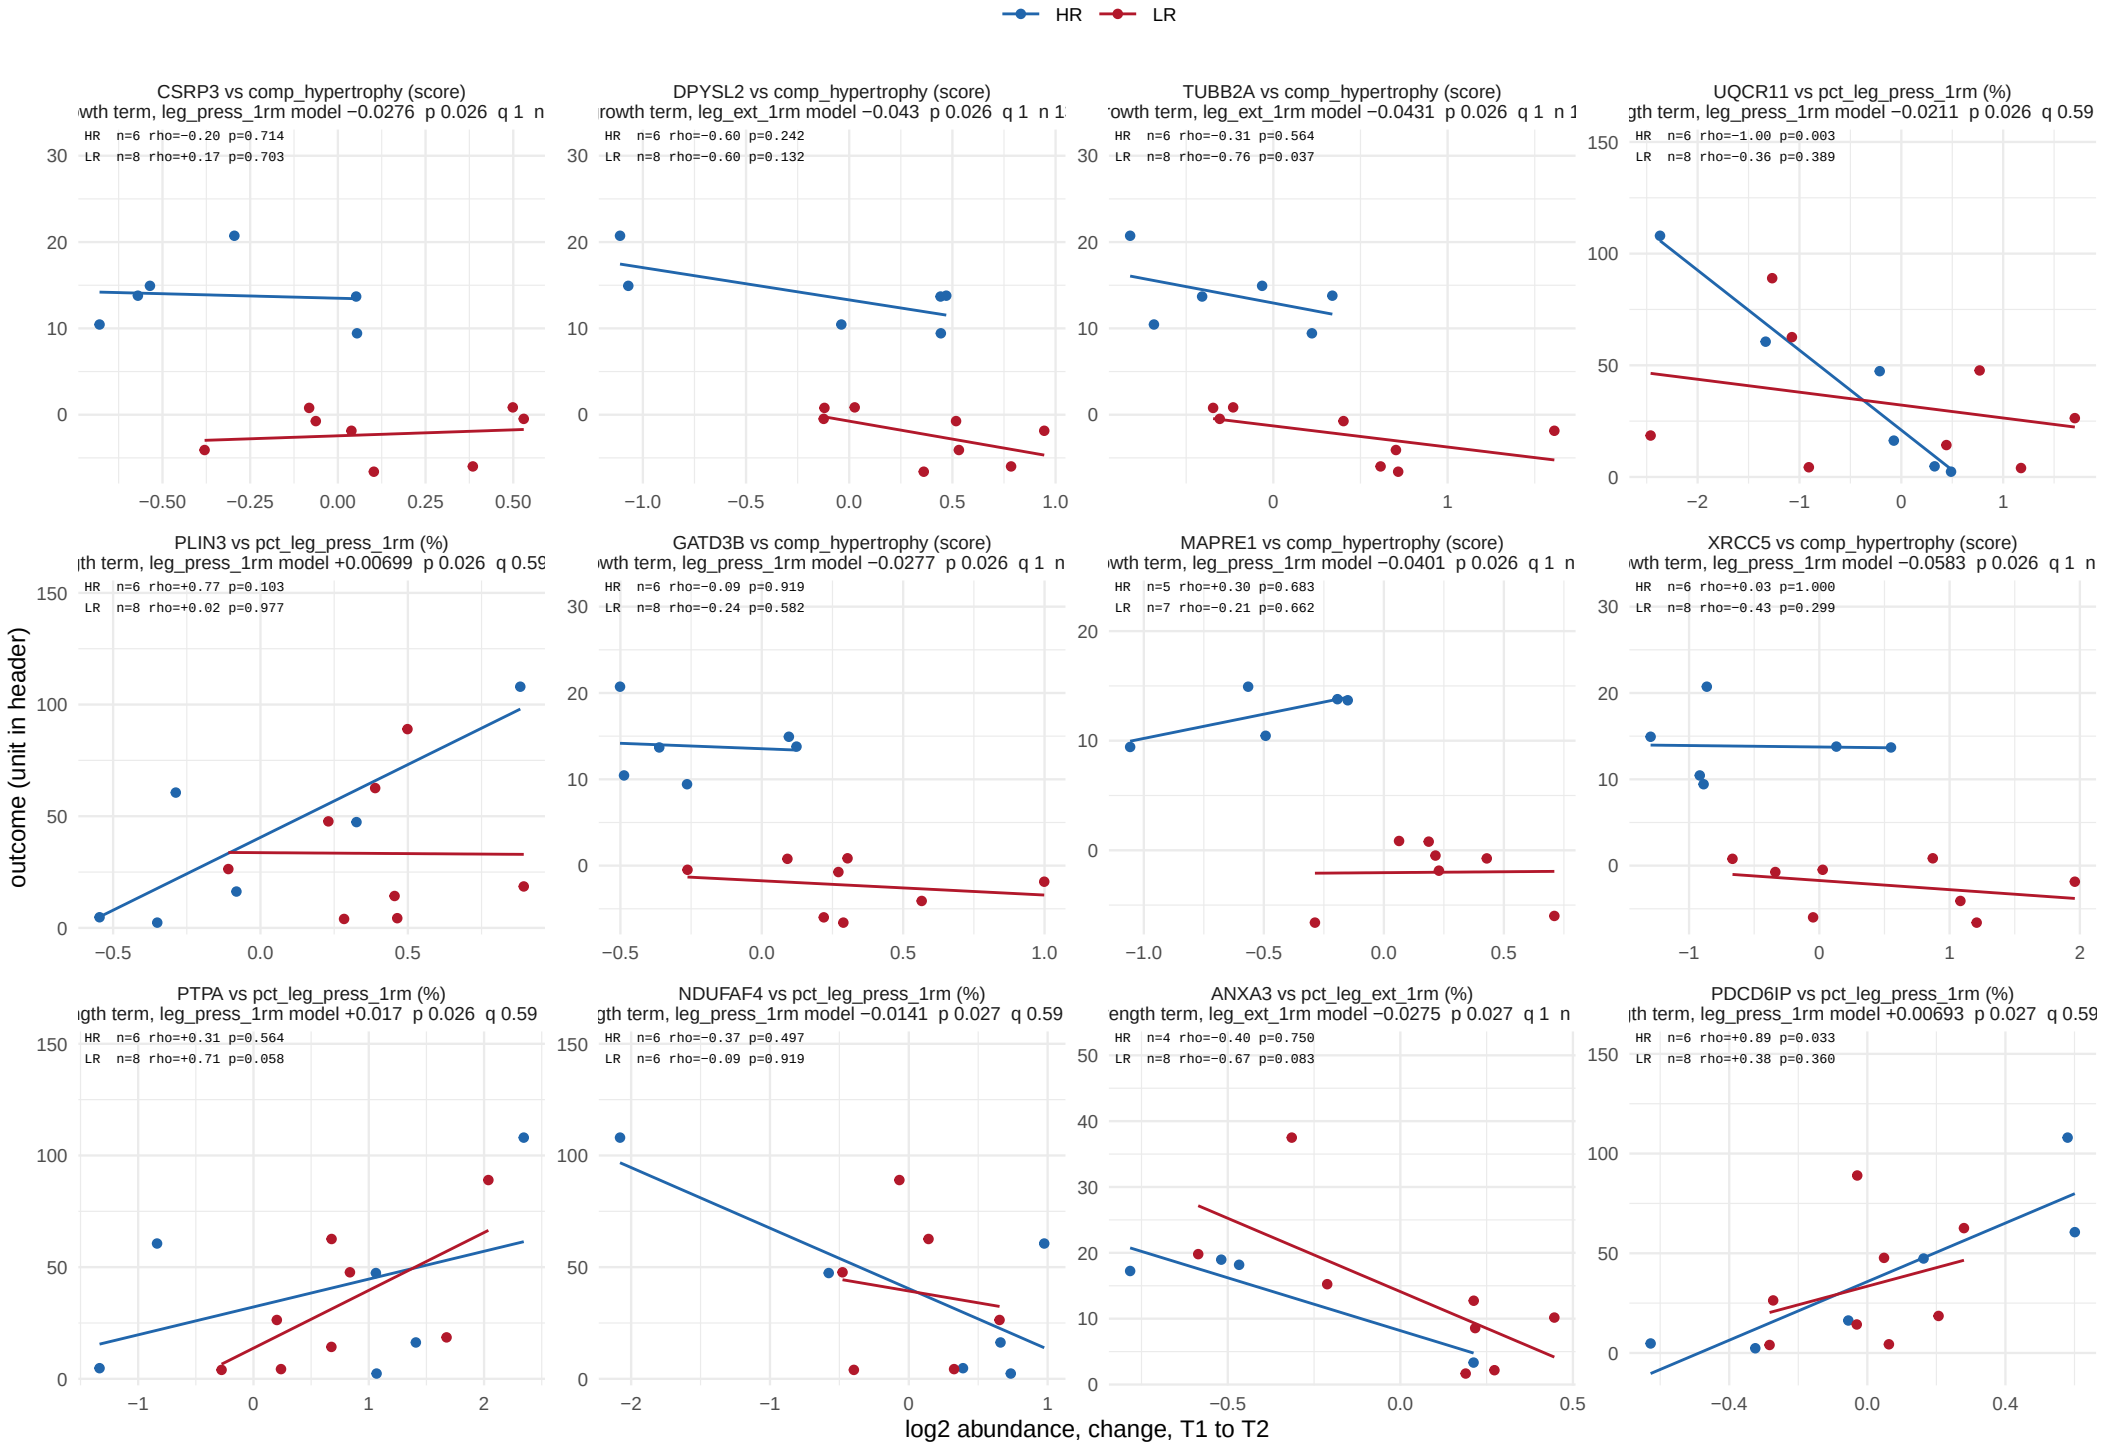

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, training window


231 of 5676 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 10 of 20.

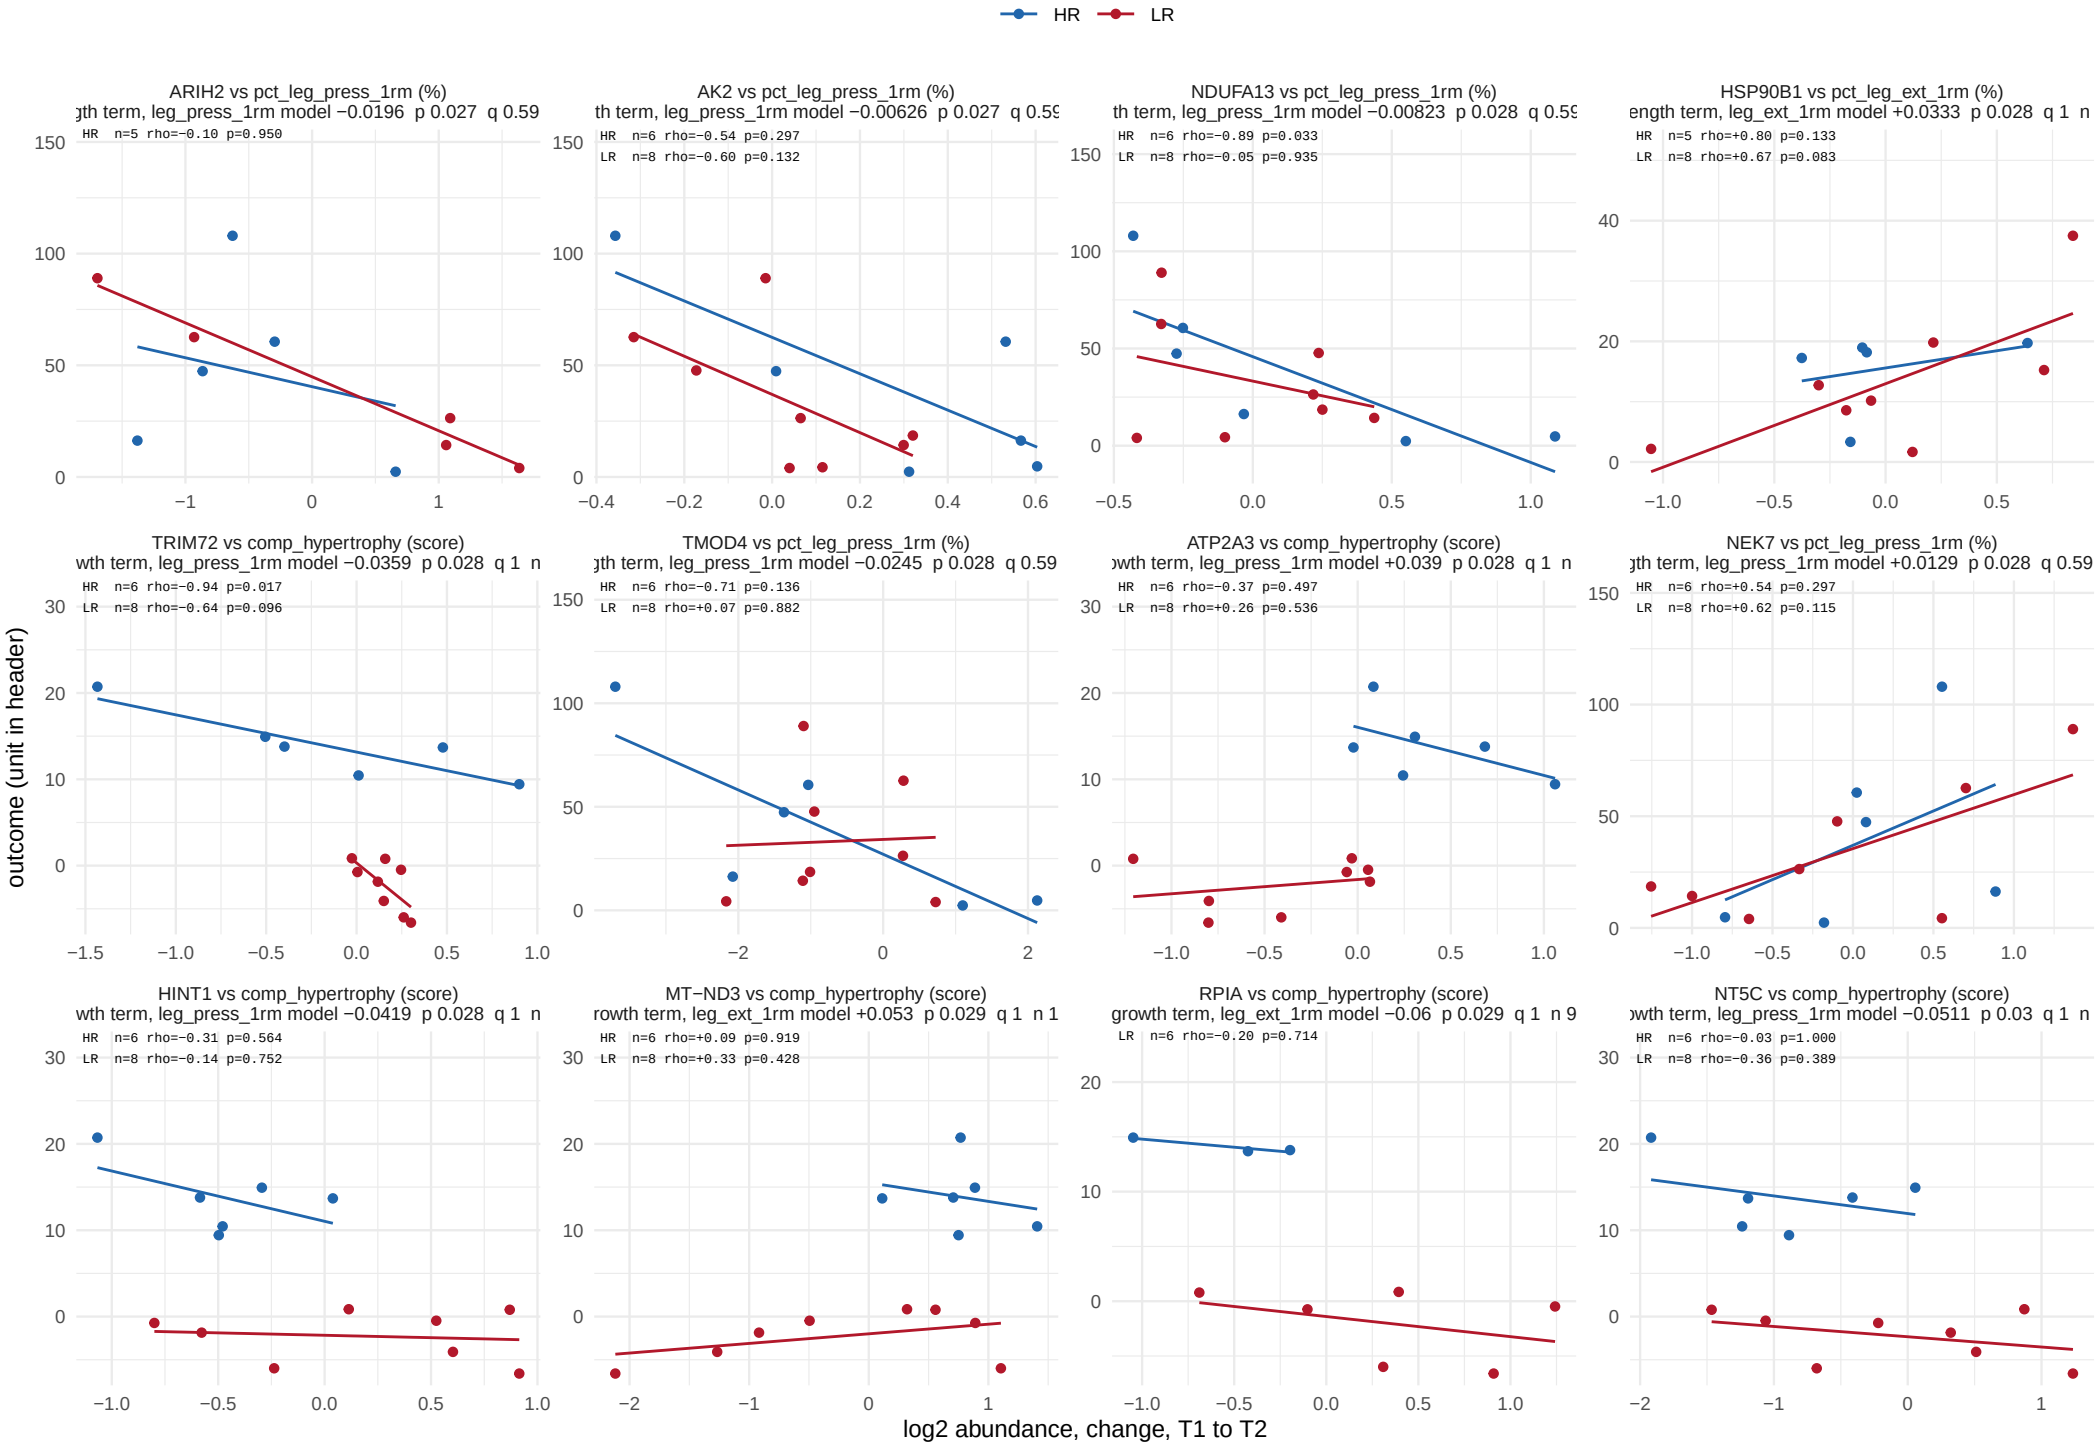

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, training window


231 of 5676 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 11 of 20.

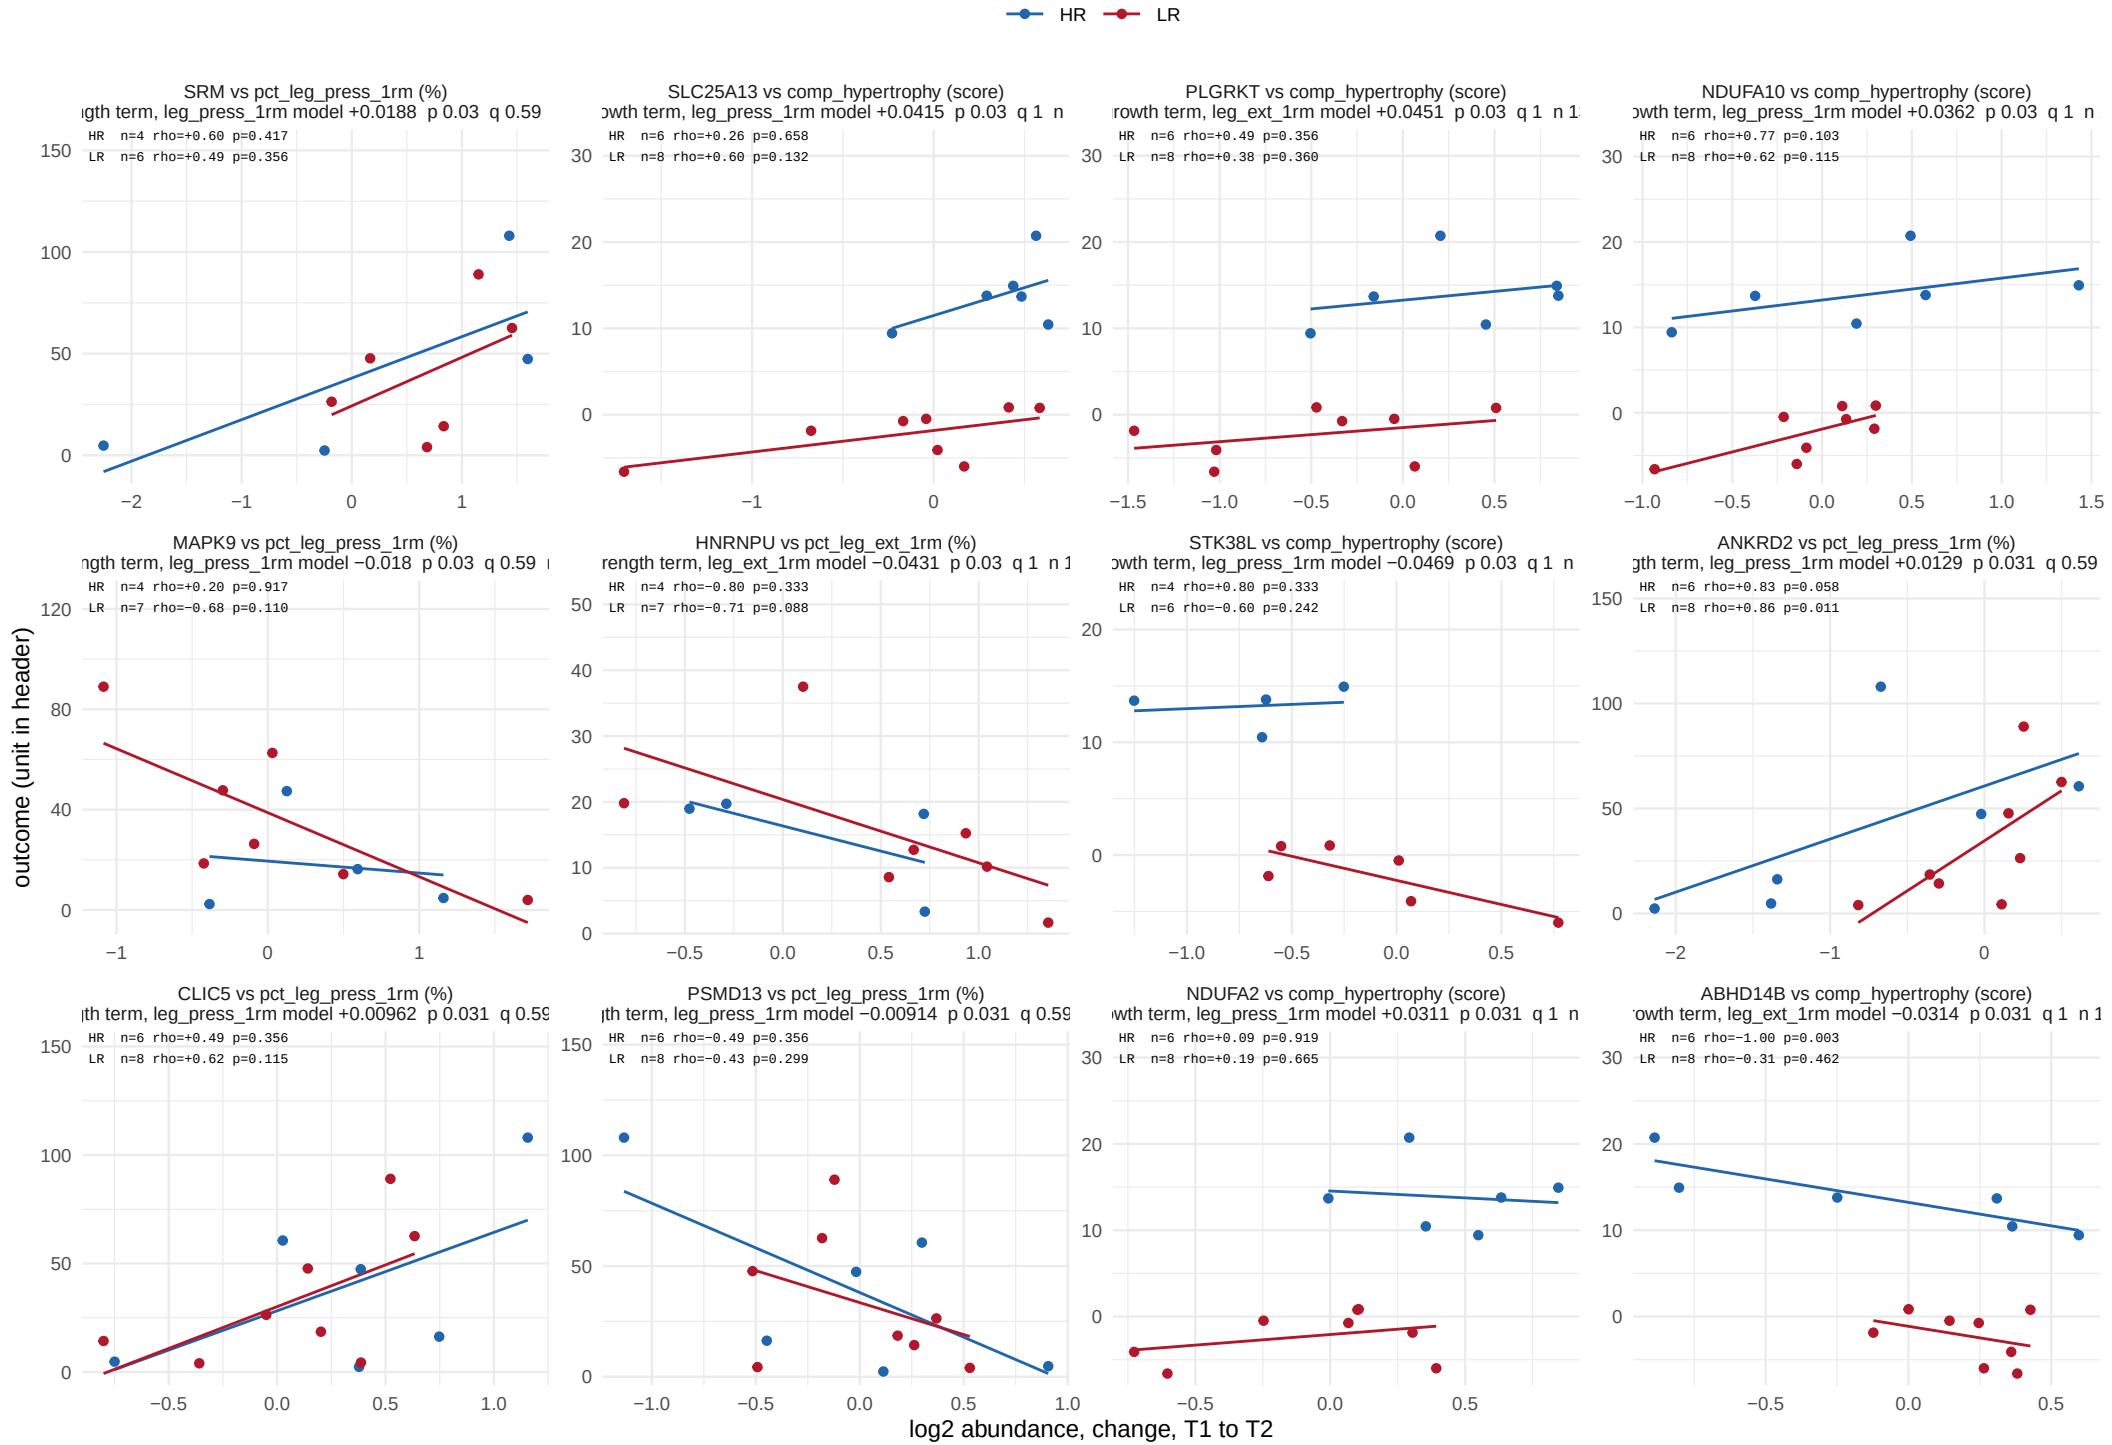

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, training window


231 of 5676 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 12 of 20.

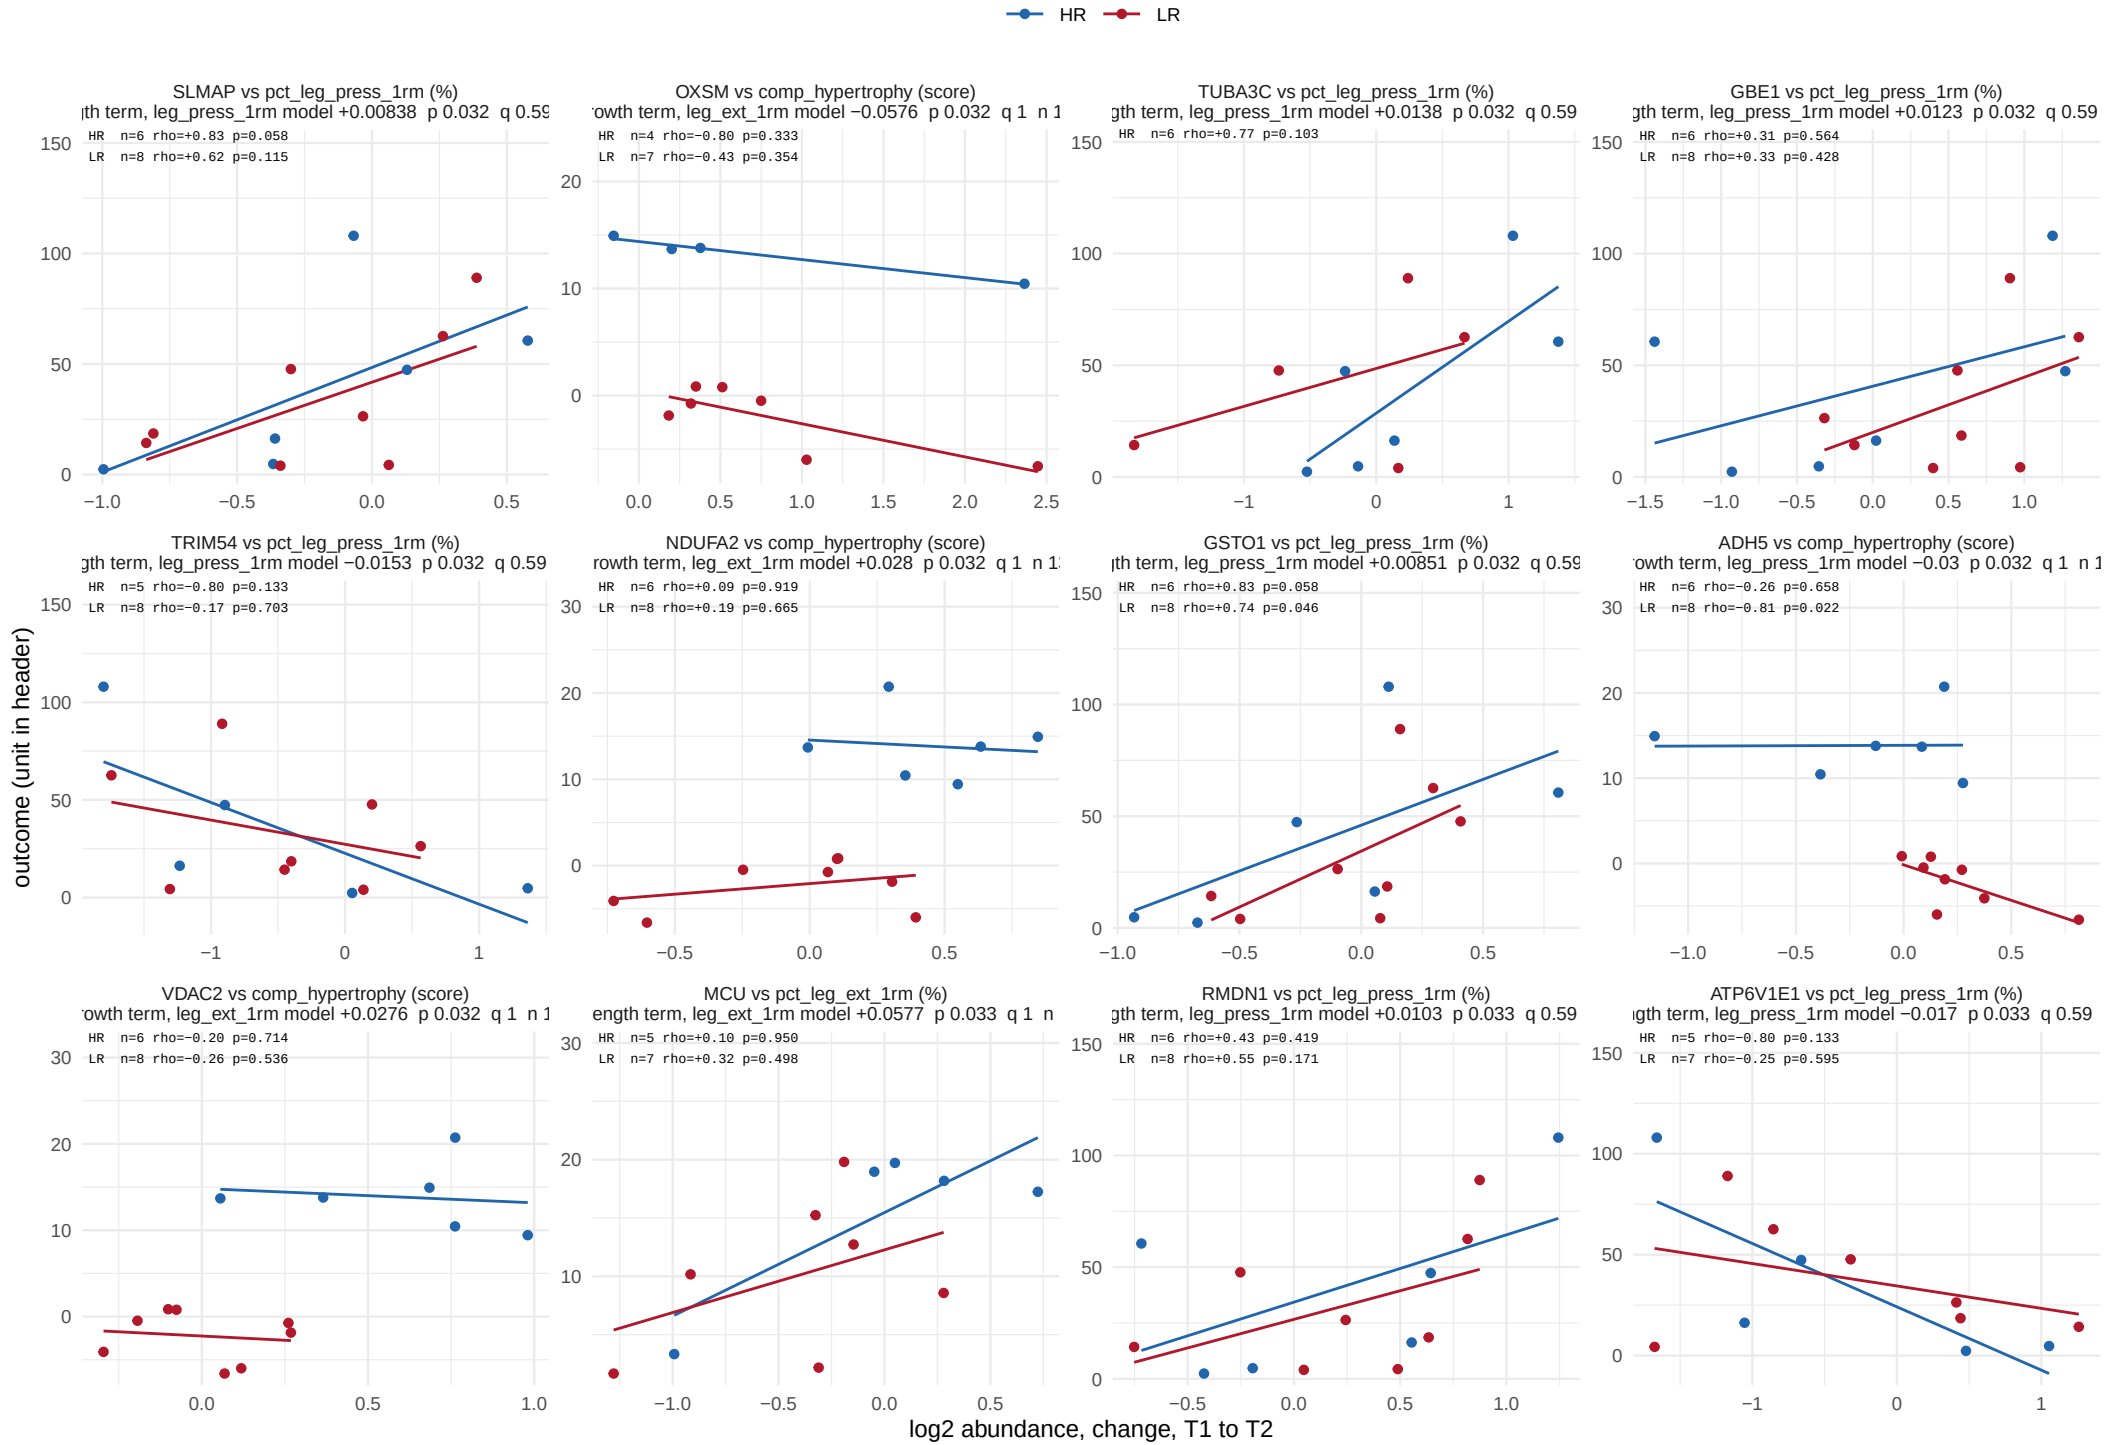

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, training window


231 of 5676 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 13 of 20.

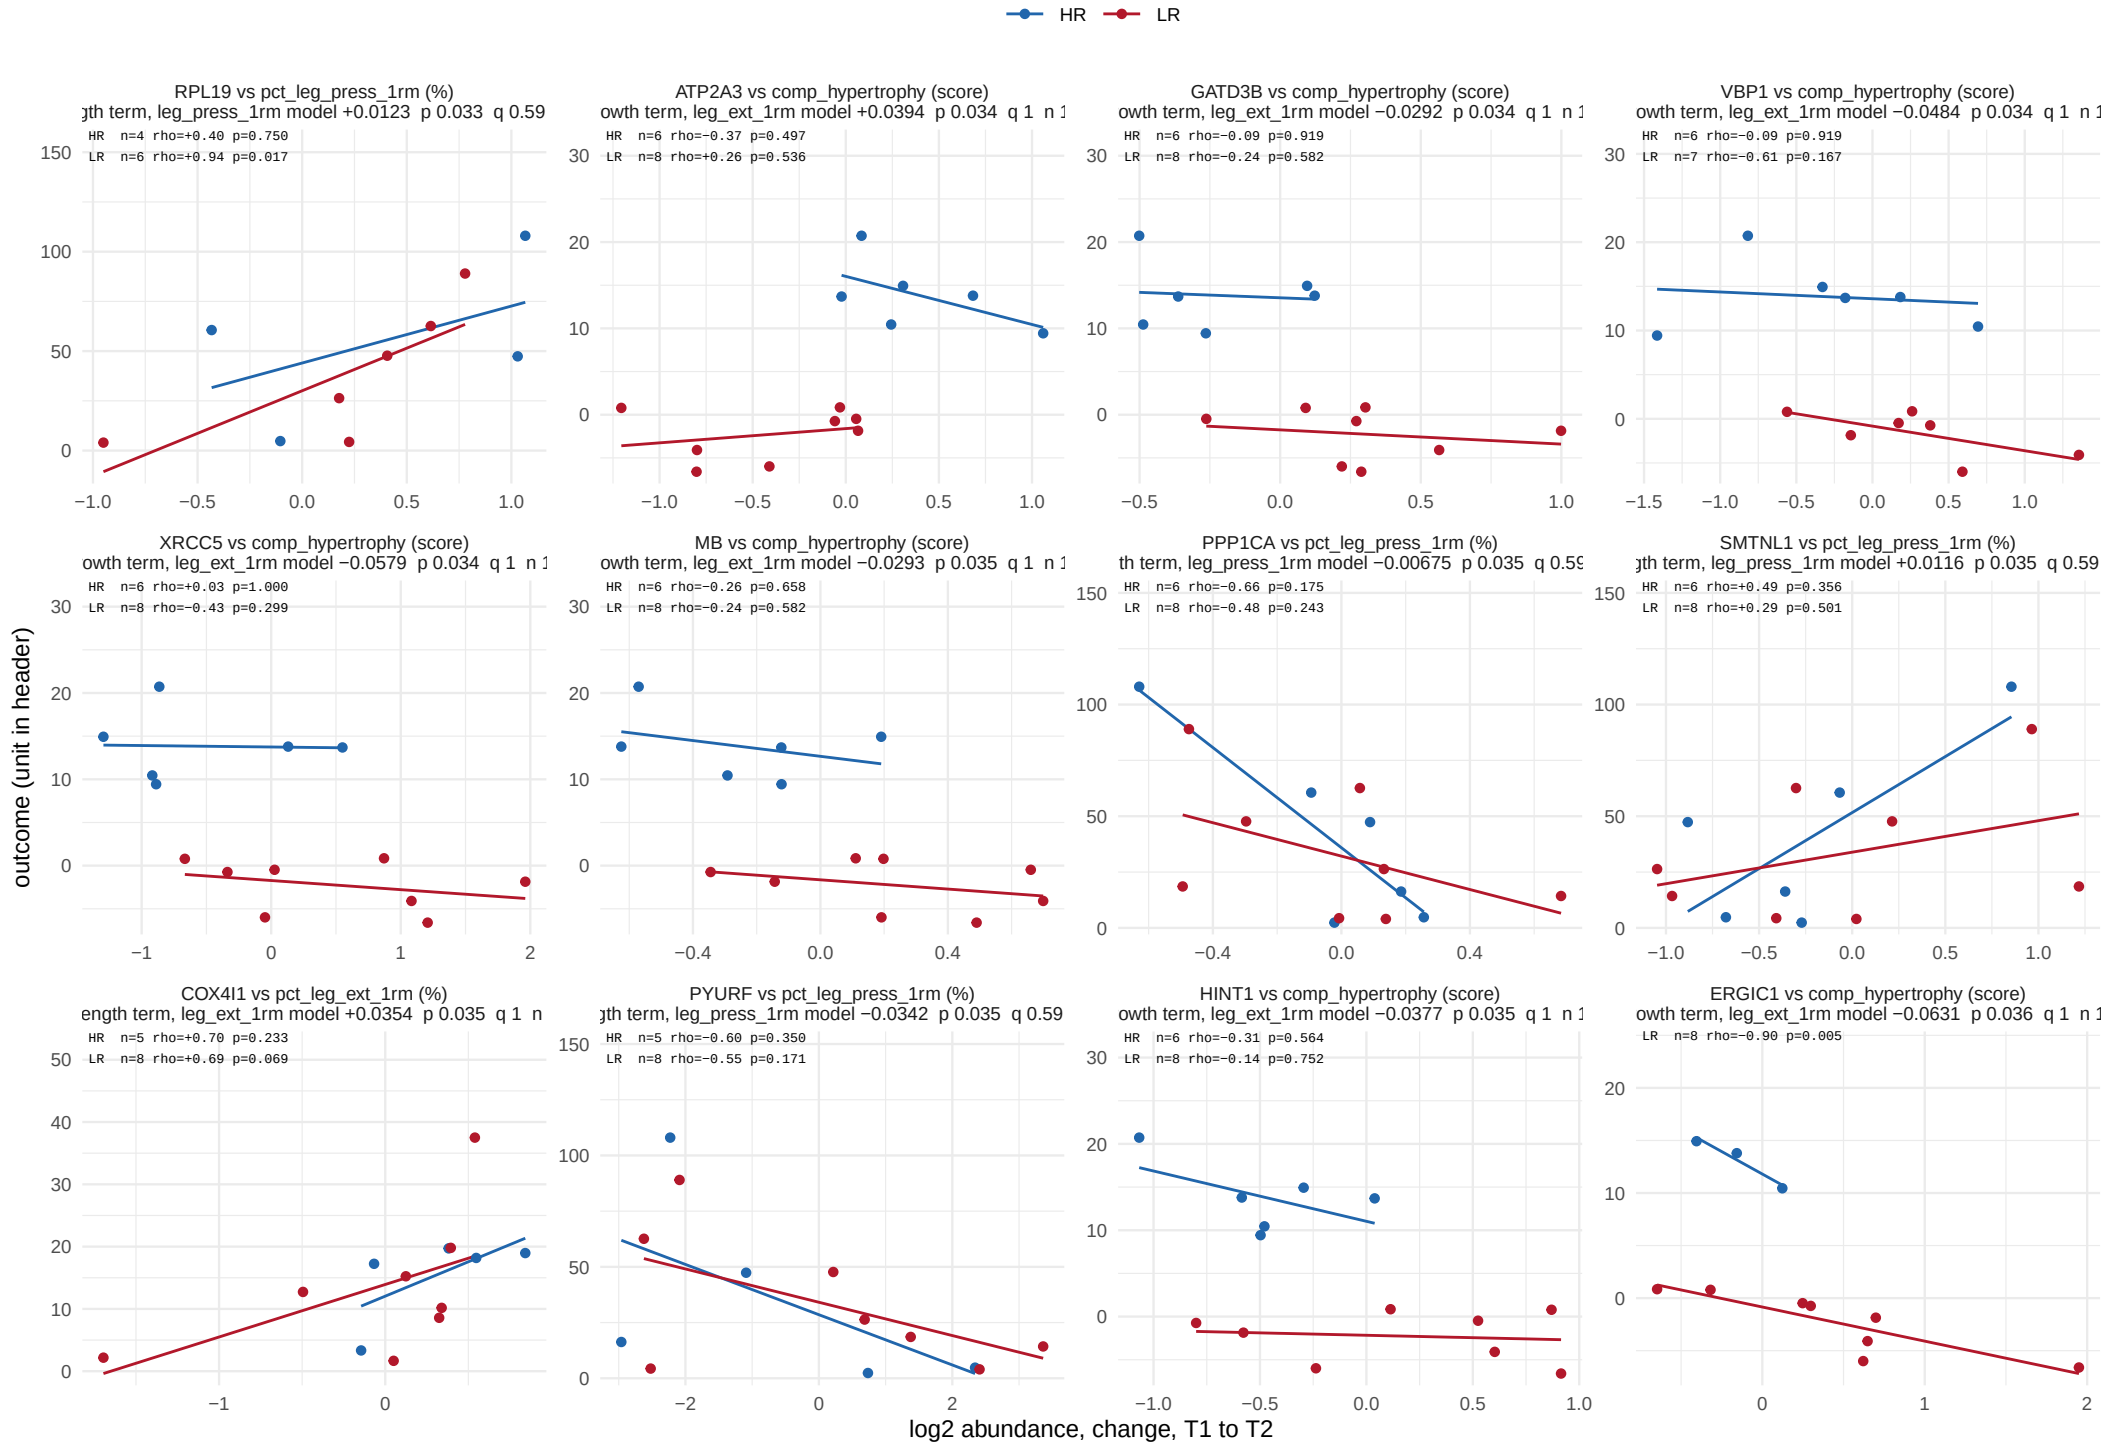

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, training window


231 of 5676 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 14 of 20.

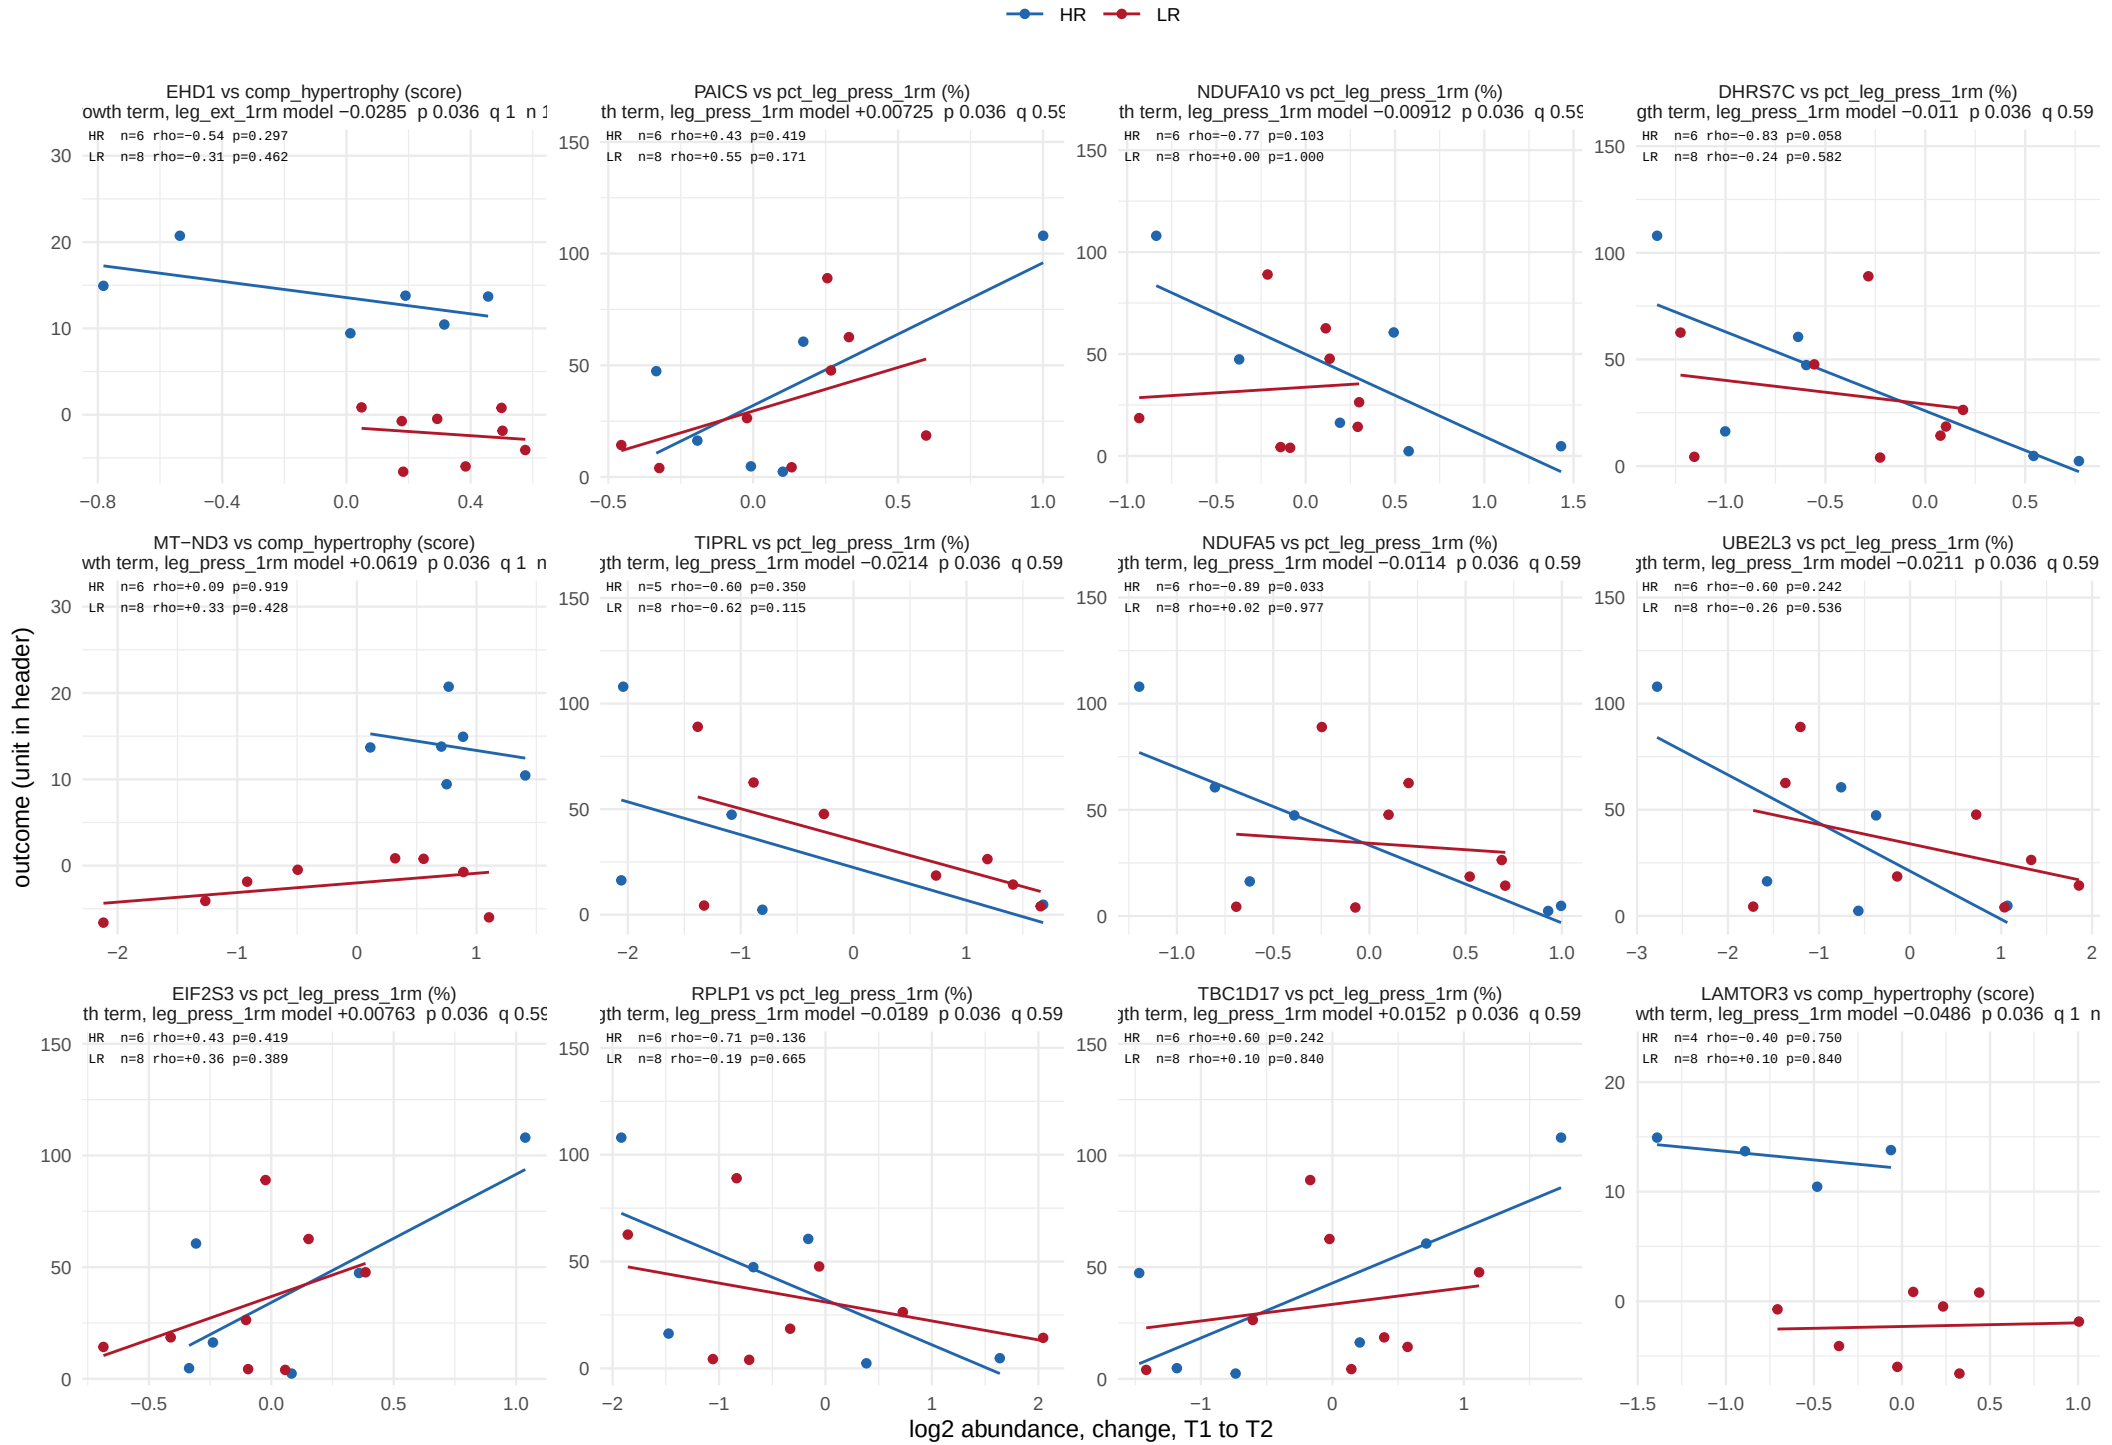

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, training window

231 of 5676 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 15 of 20.

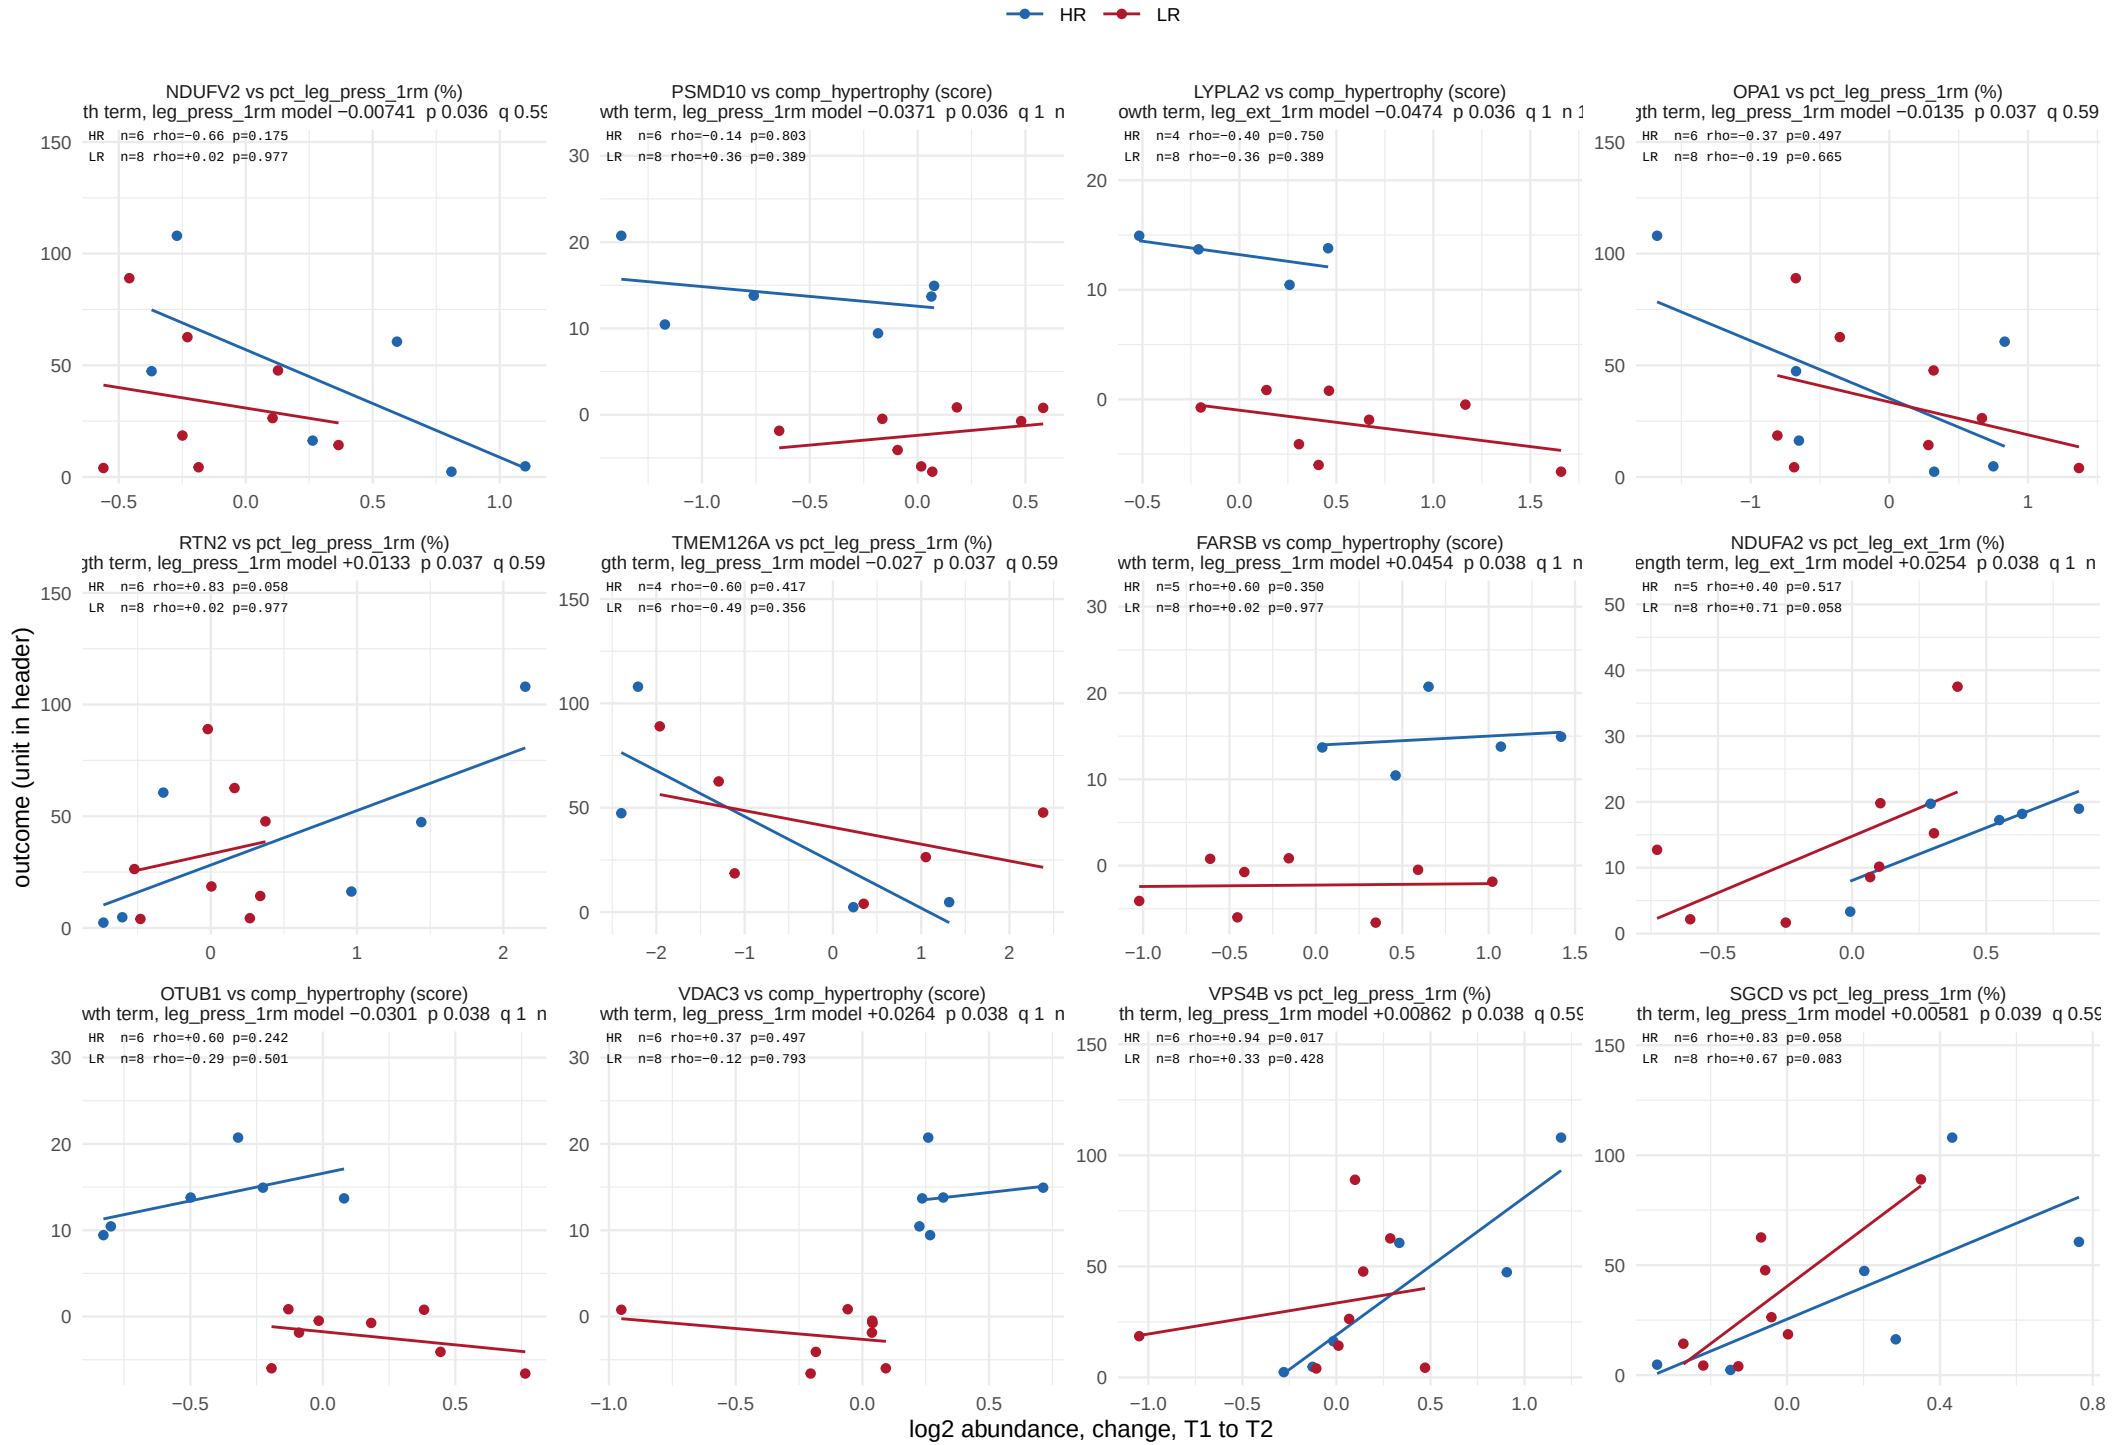

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, training window


231 of 5676 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 16 of 20.



One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, training window


231 of 5676 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 17 of 20.

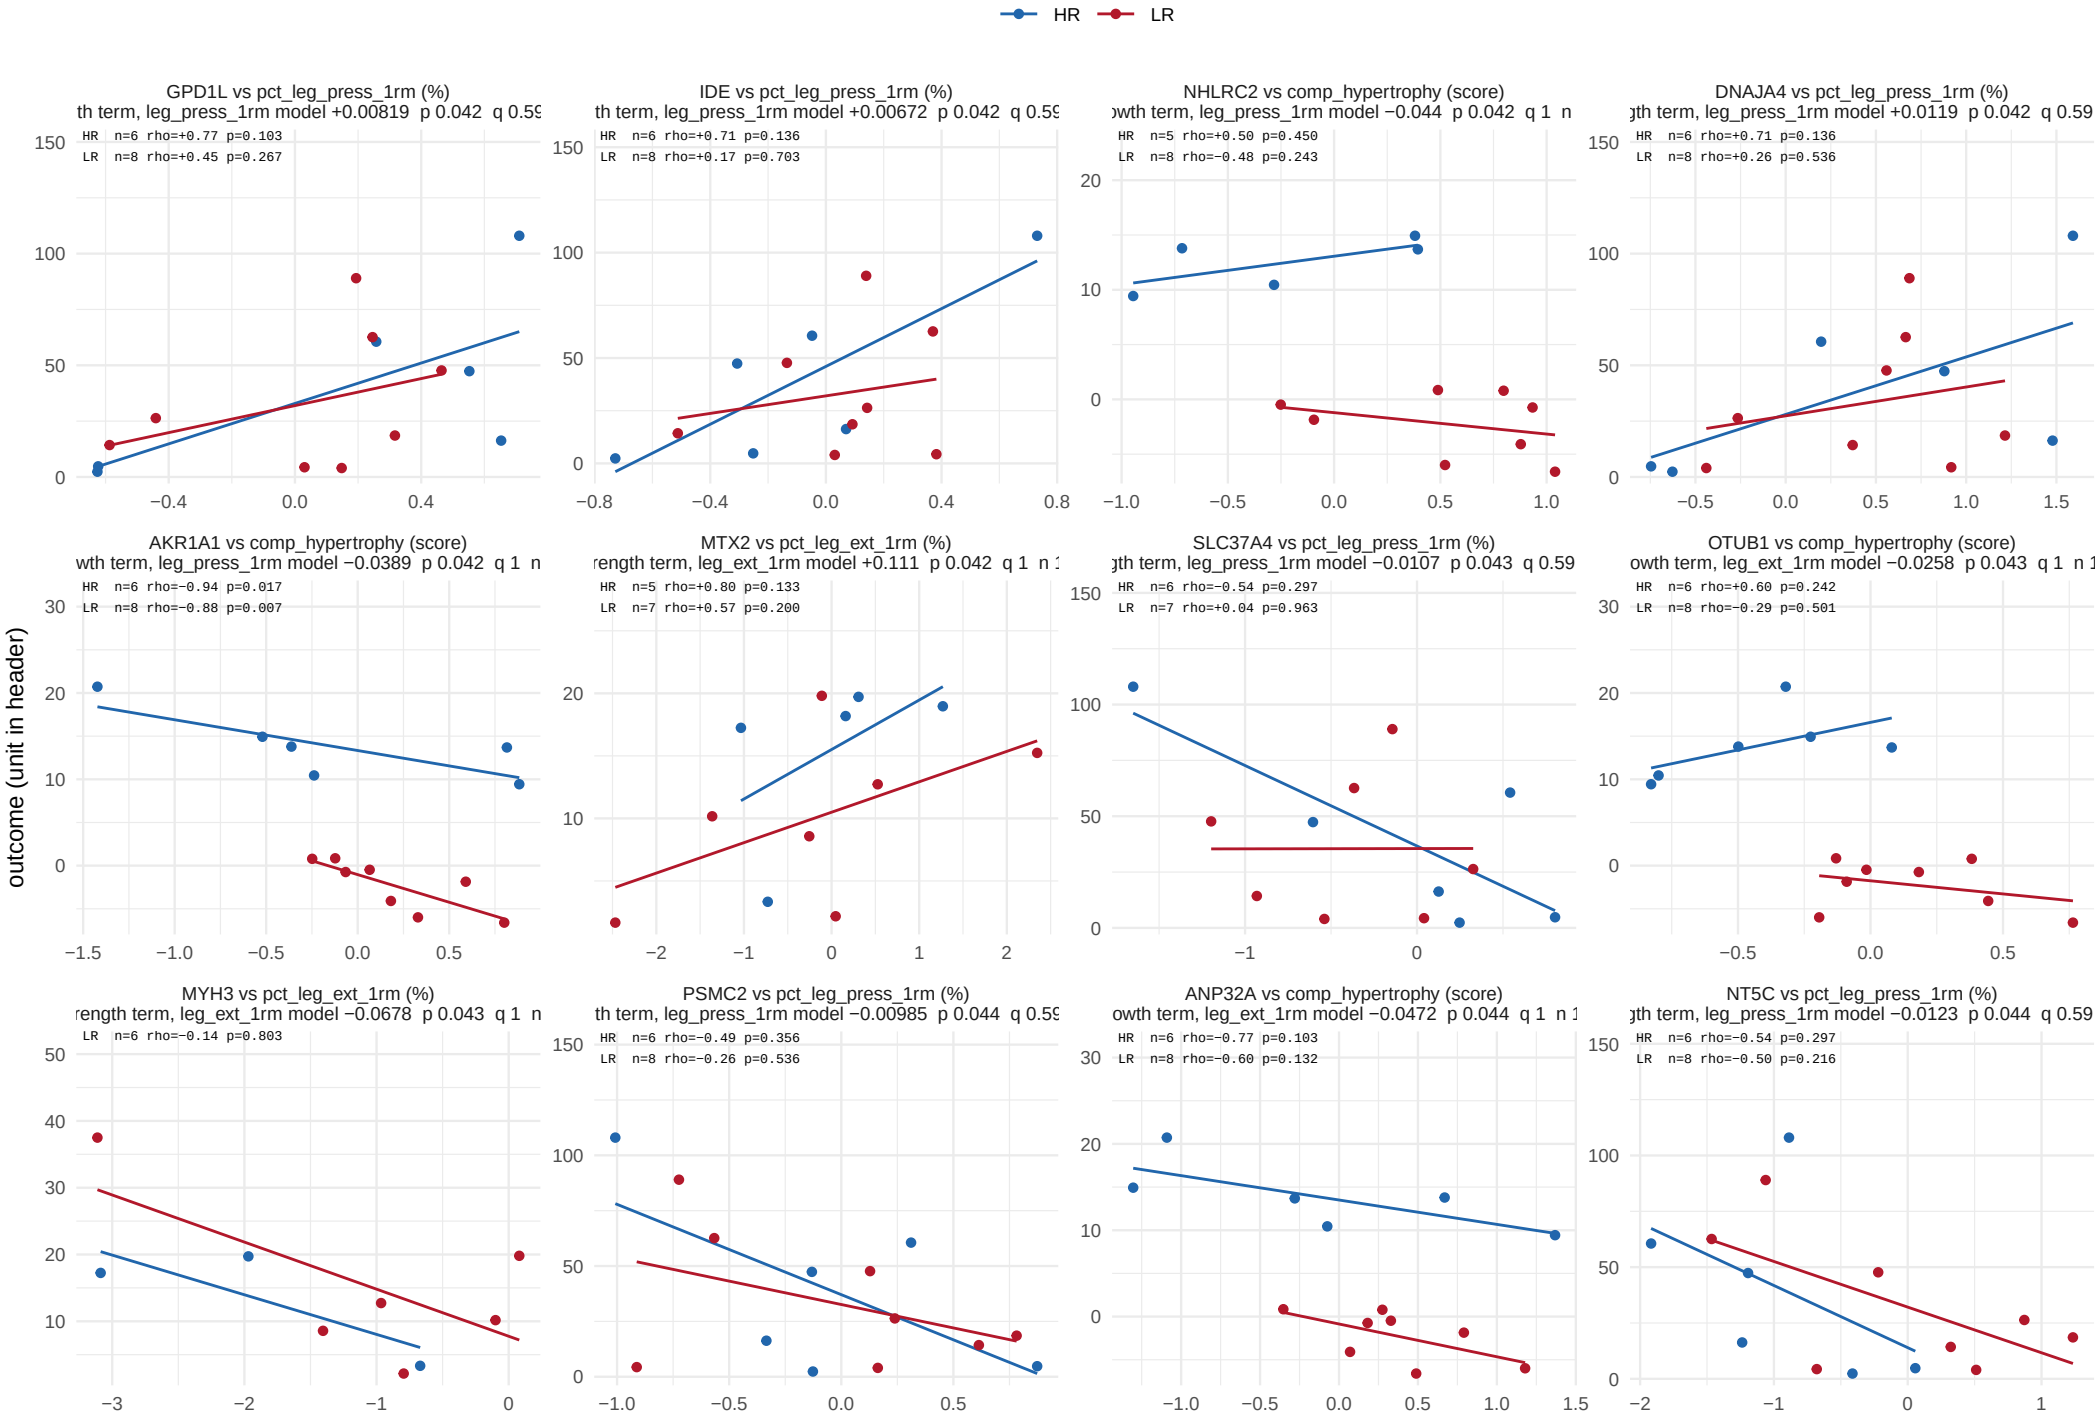

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, training window


231 of 5676 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 18 of 20.

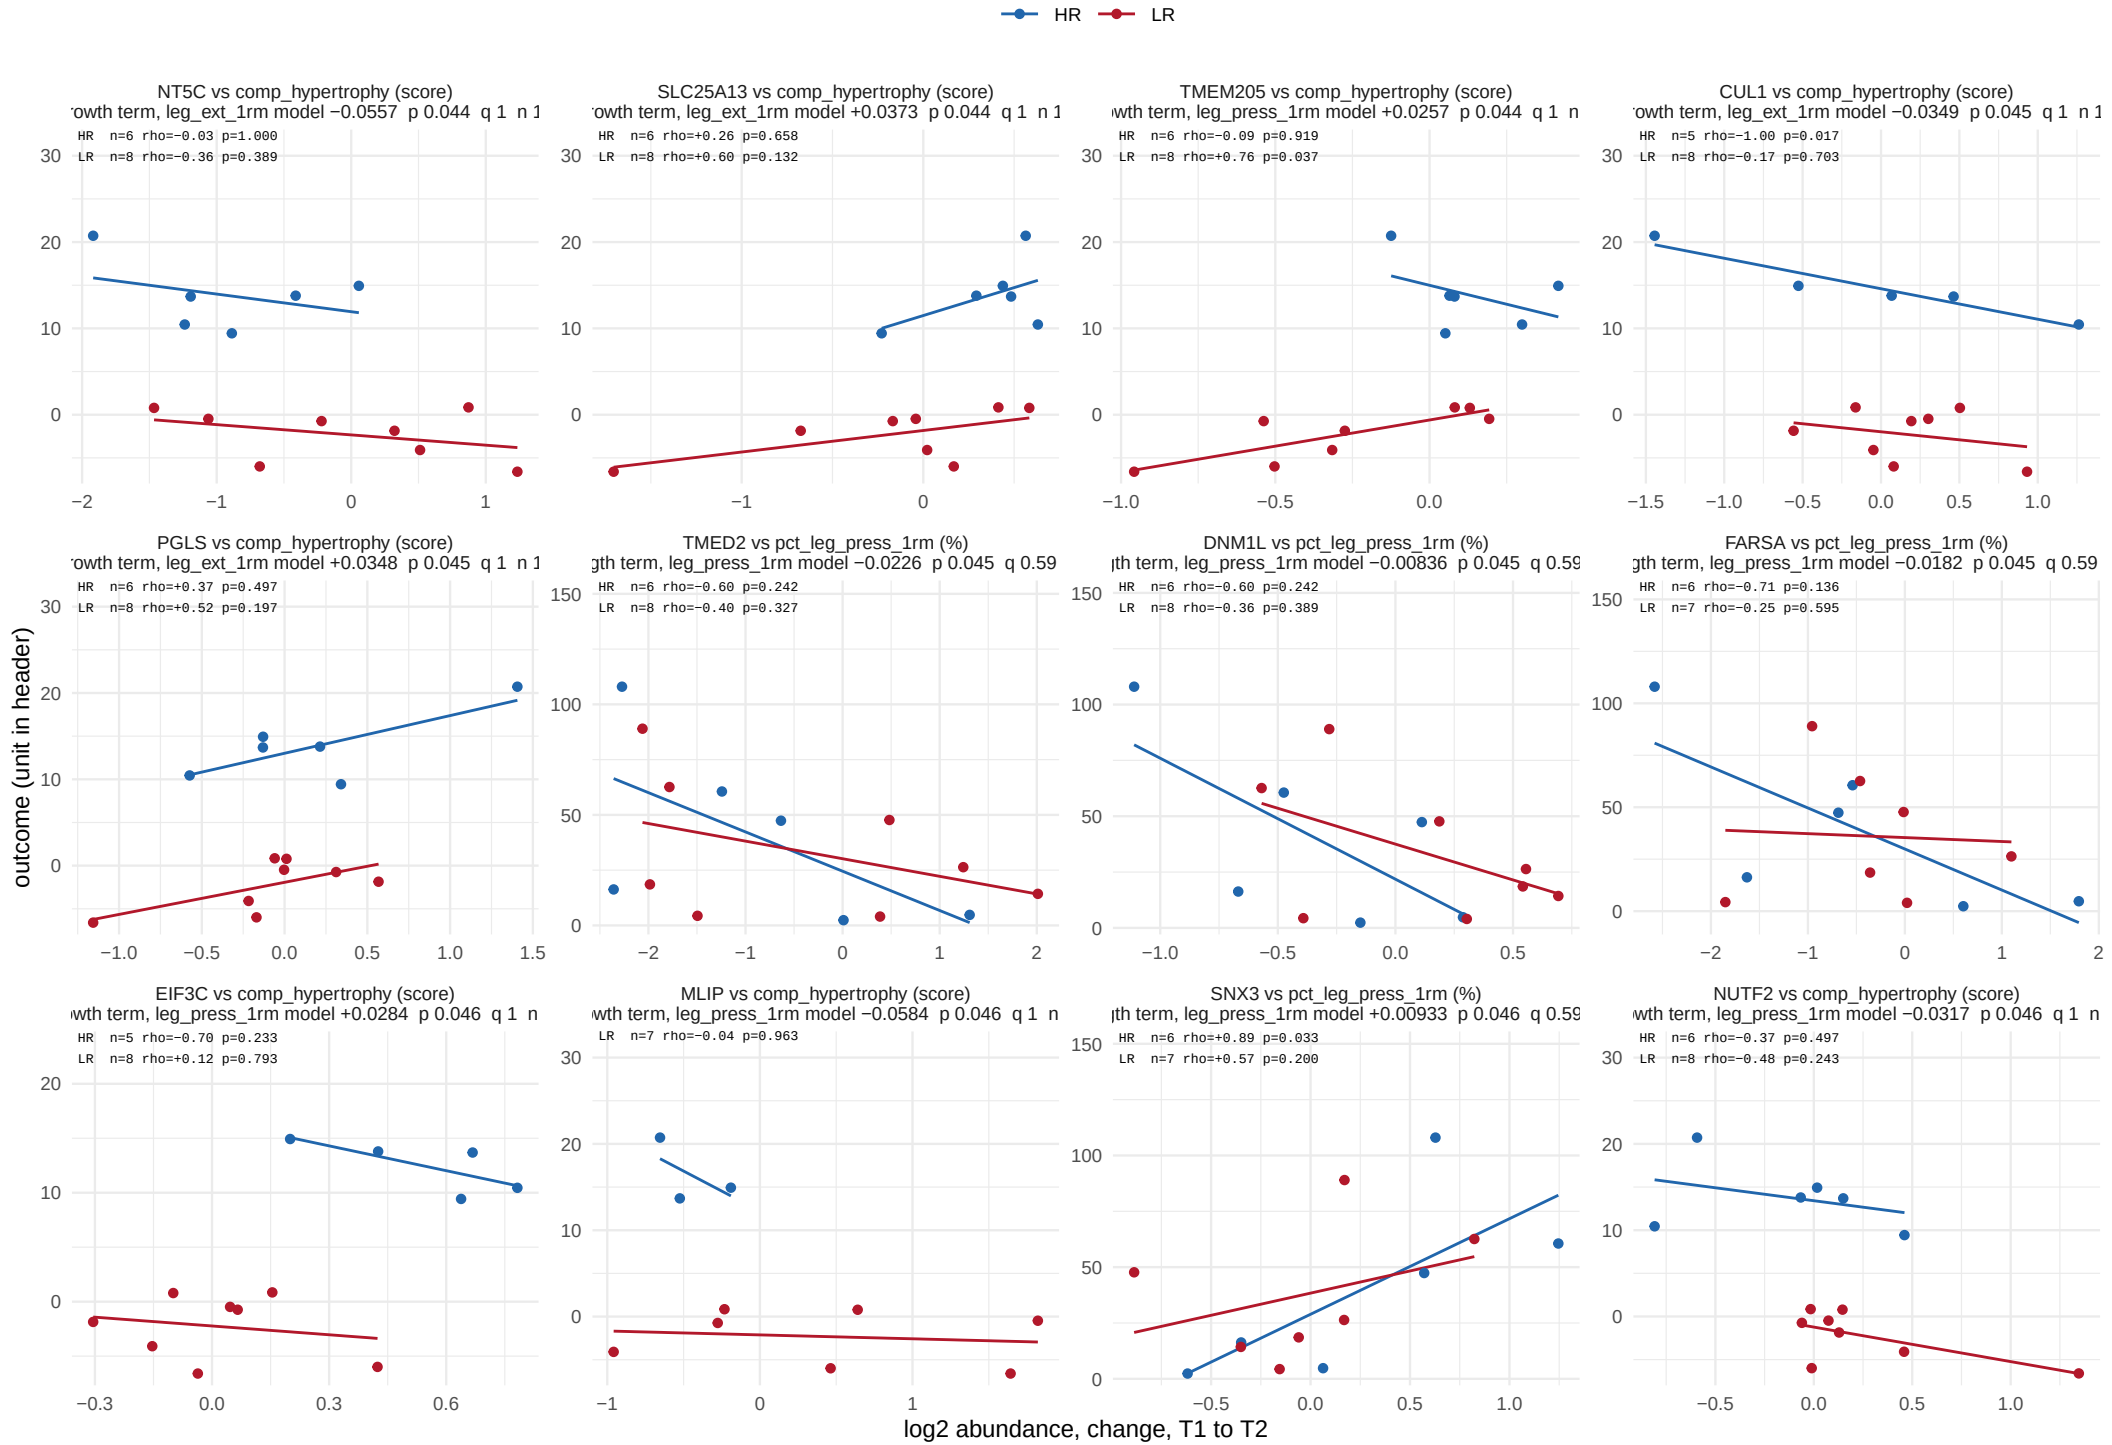

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, training window


231 of 5676 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 19 of 20.

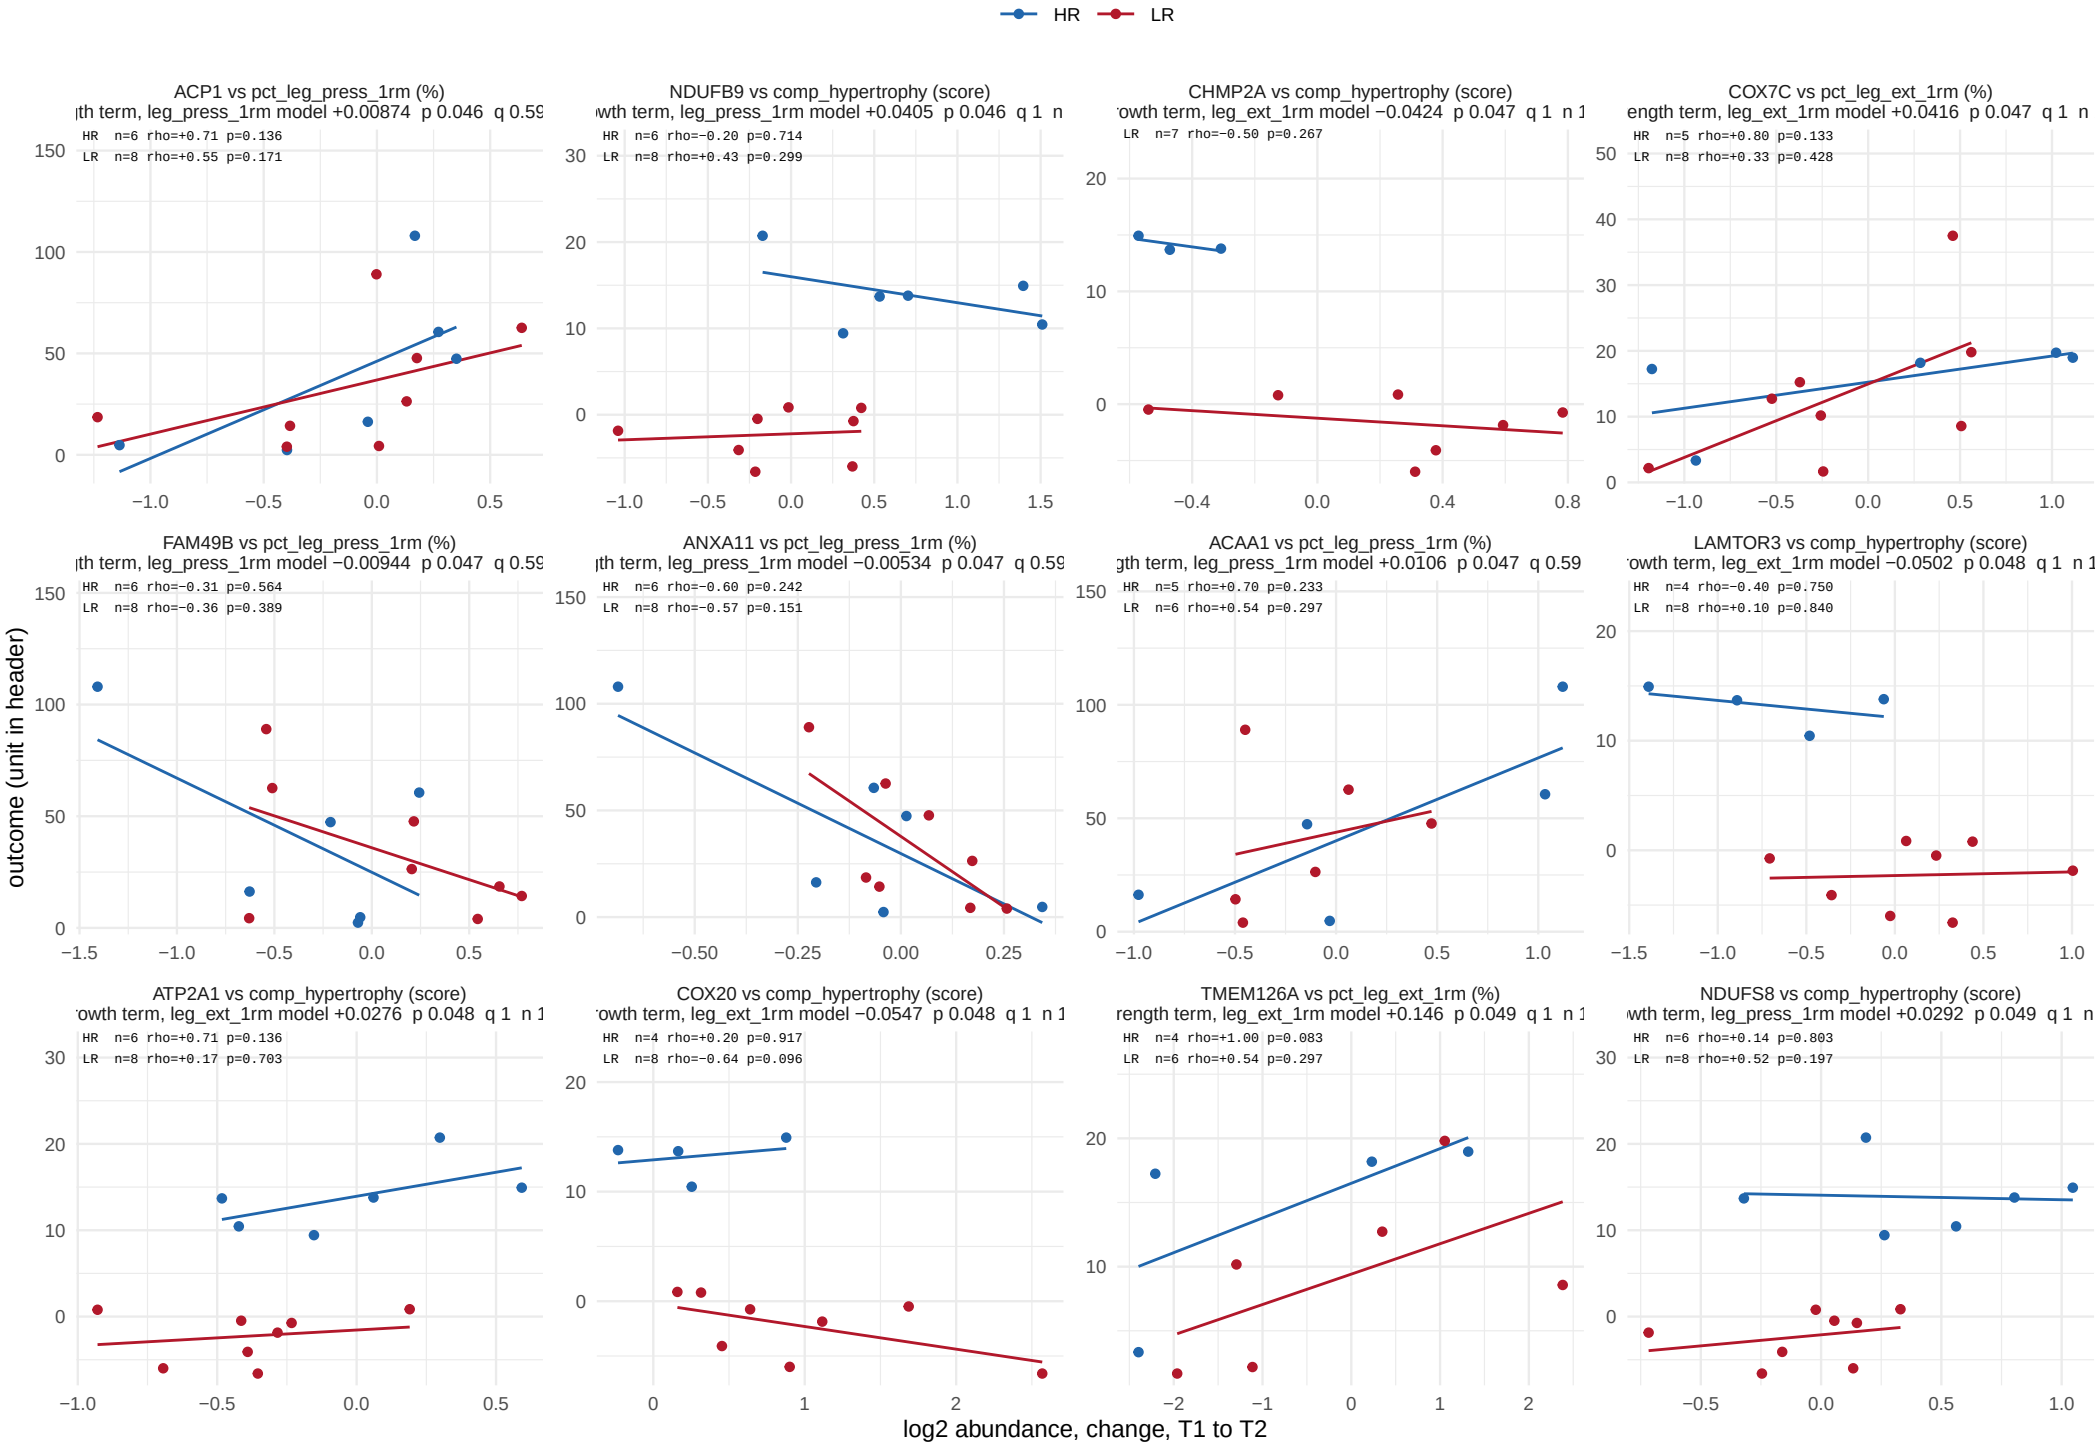

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, training window


231 of 5676 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 20 of 20.

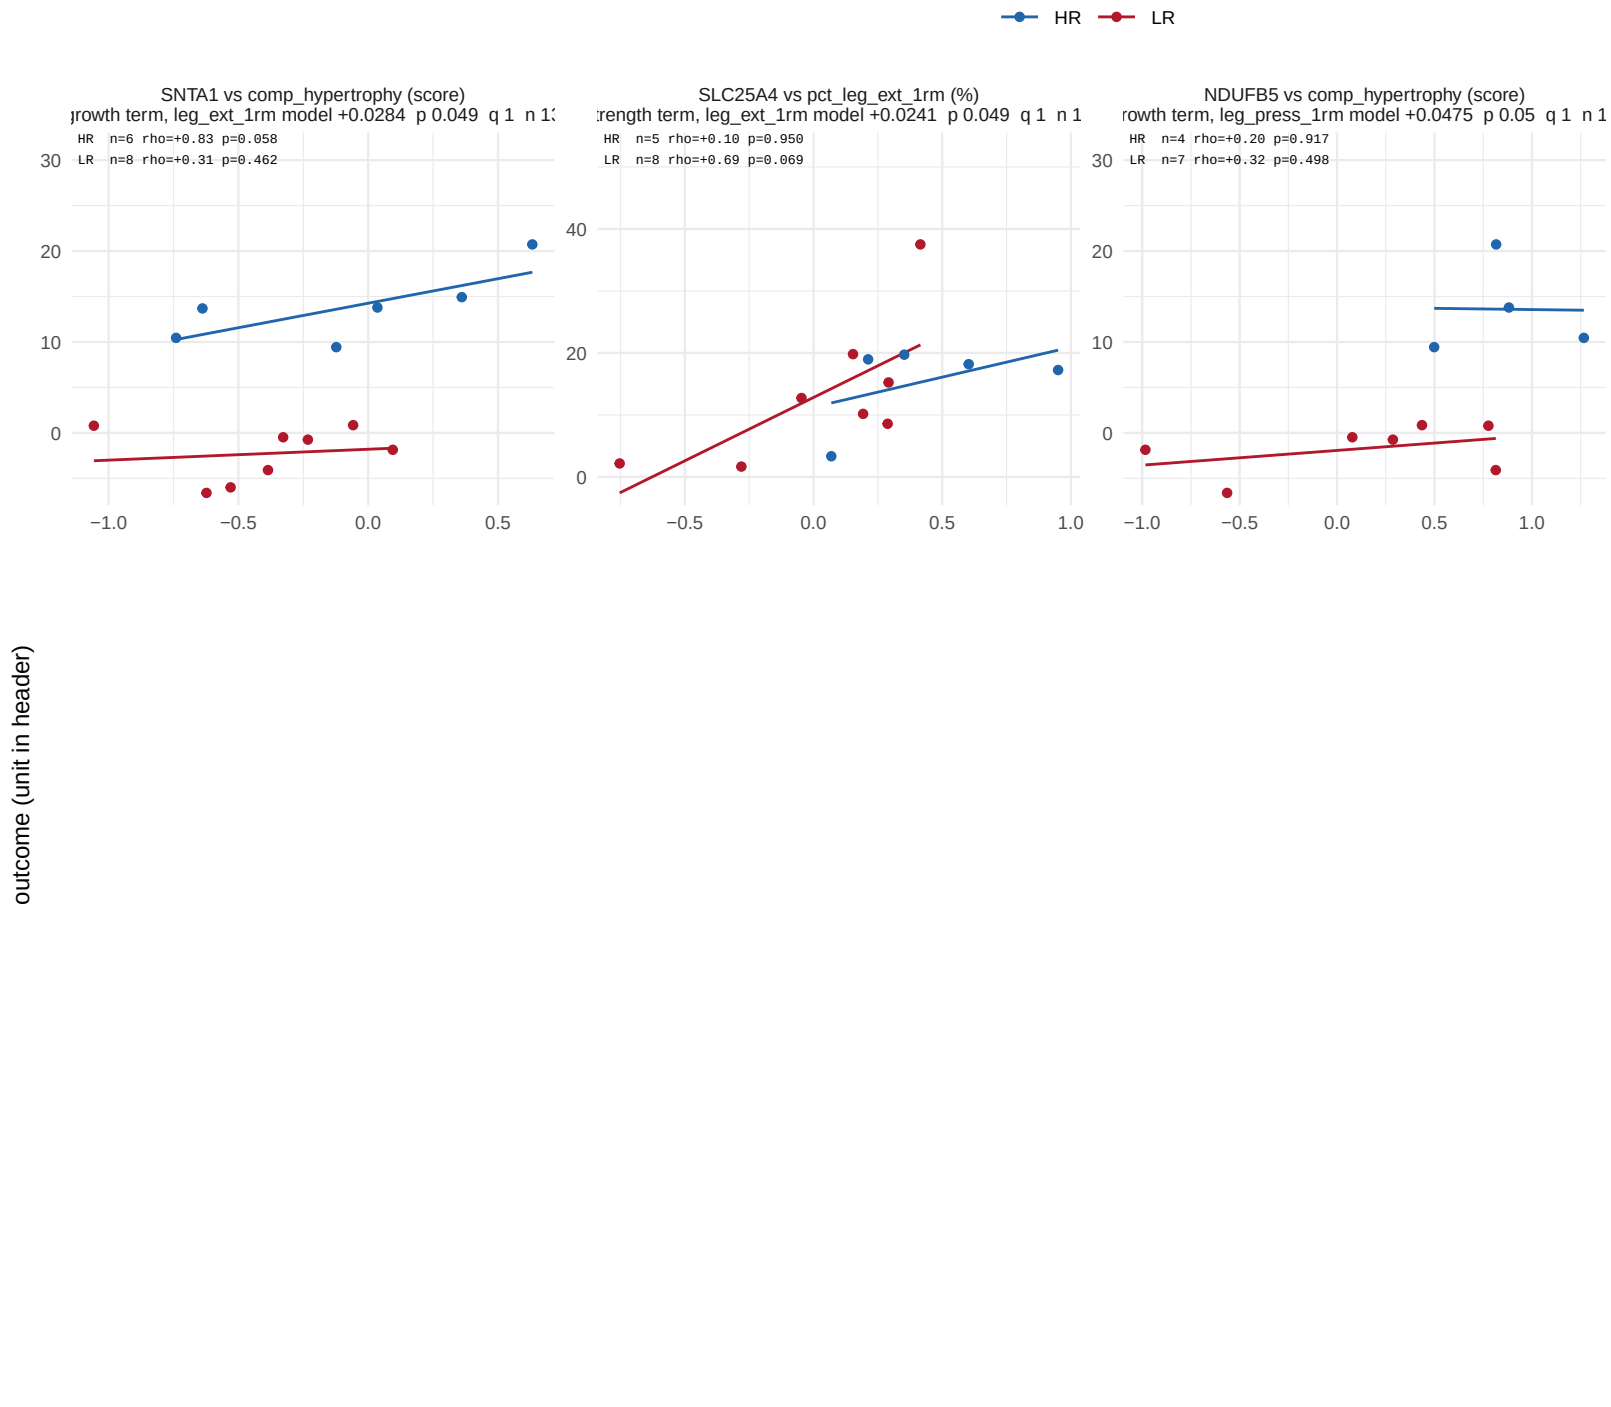

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, baseline window


357 of 6218 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 1 of 30.

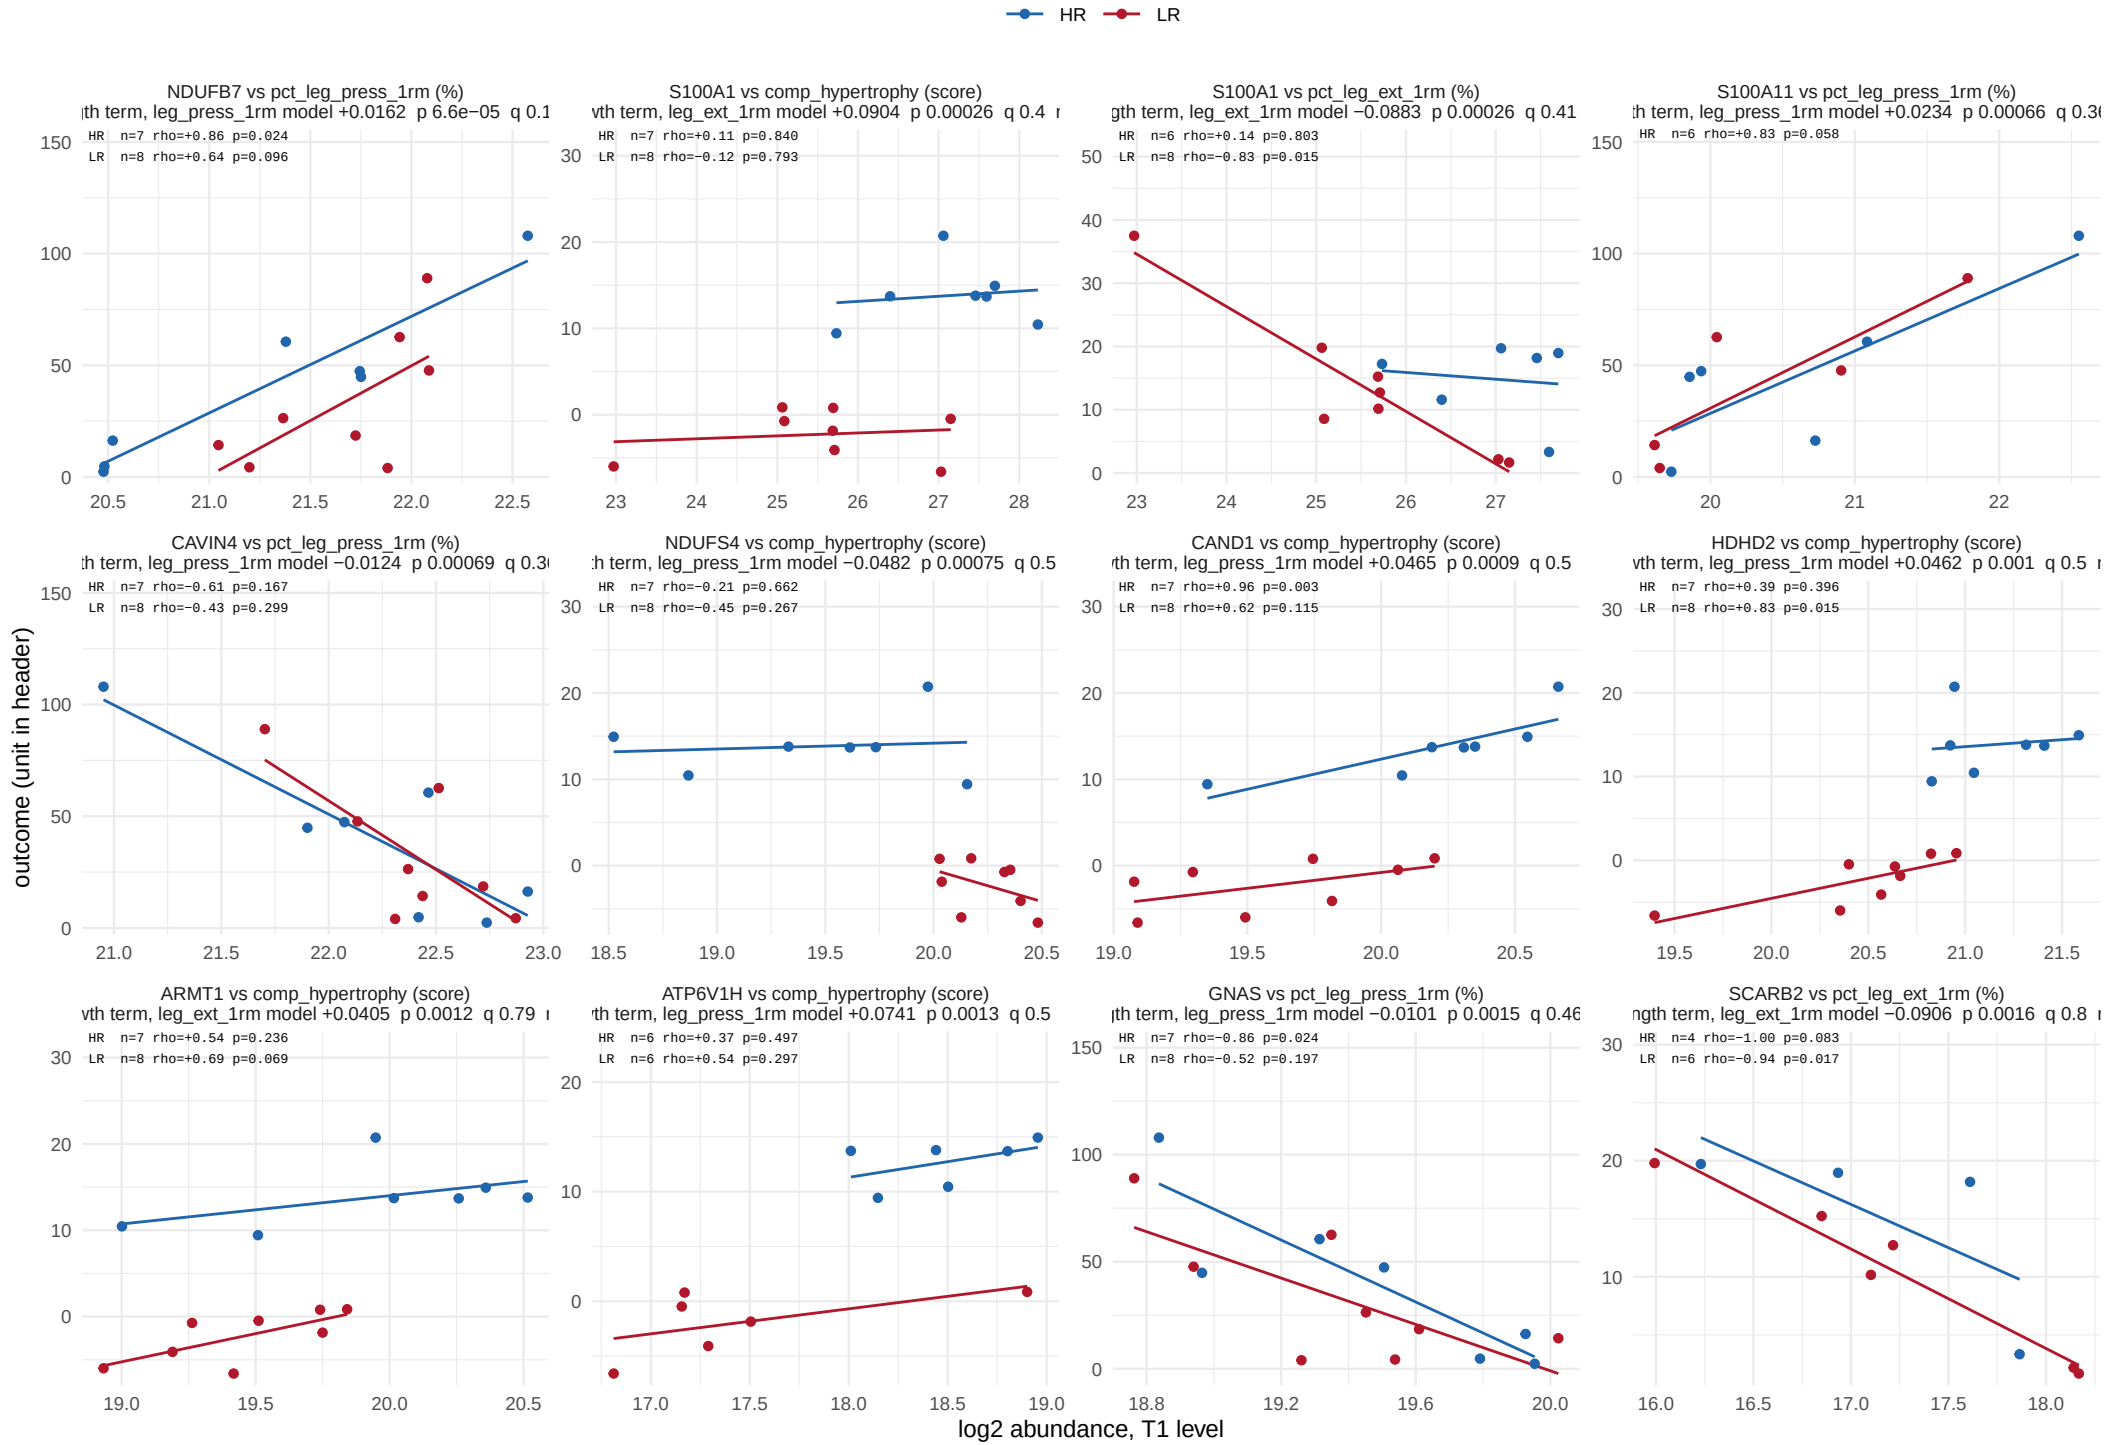

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, baseline window


357 of 6218 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 2 of 30.

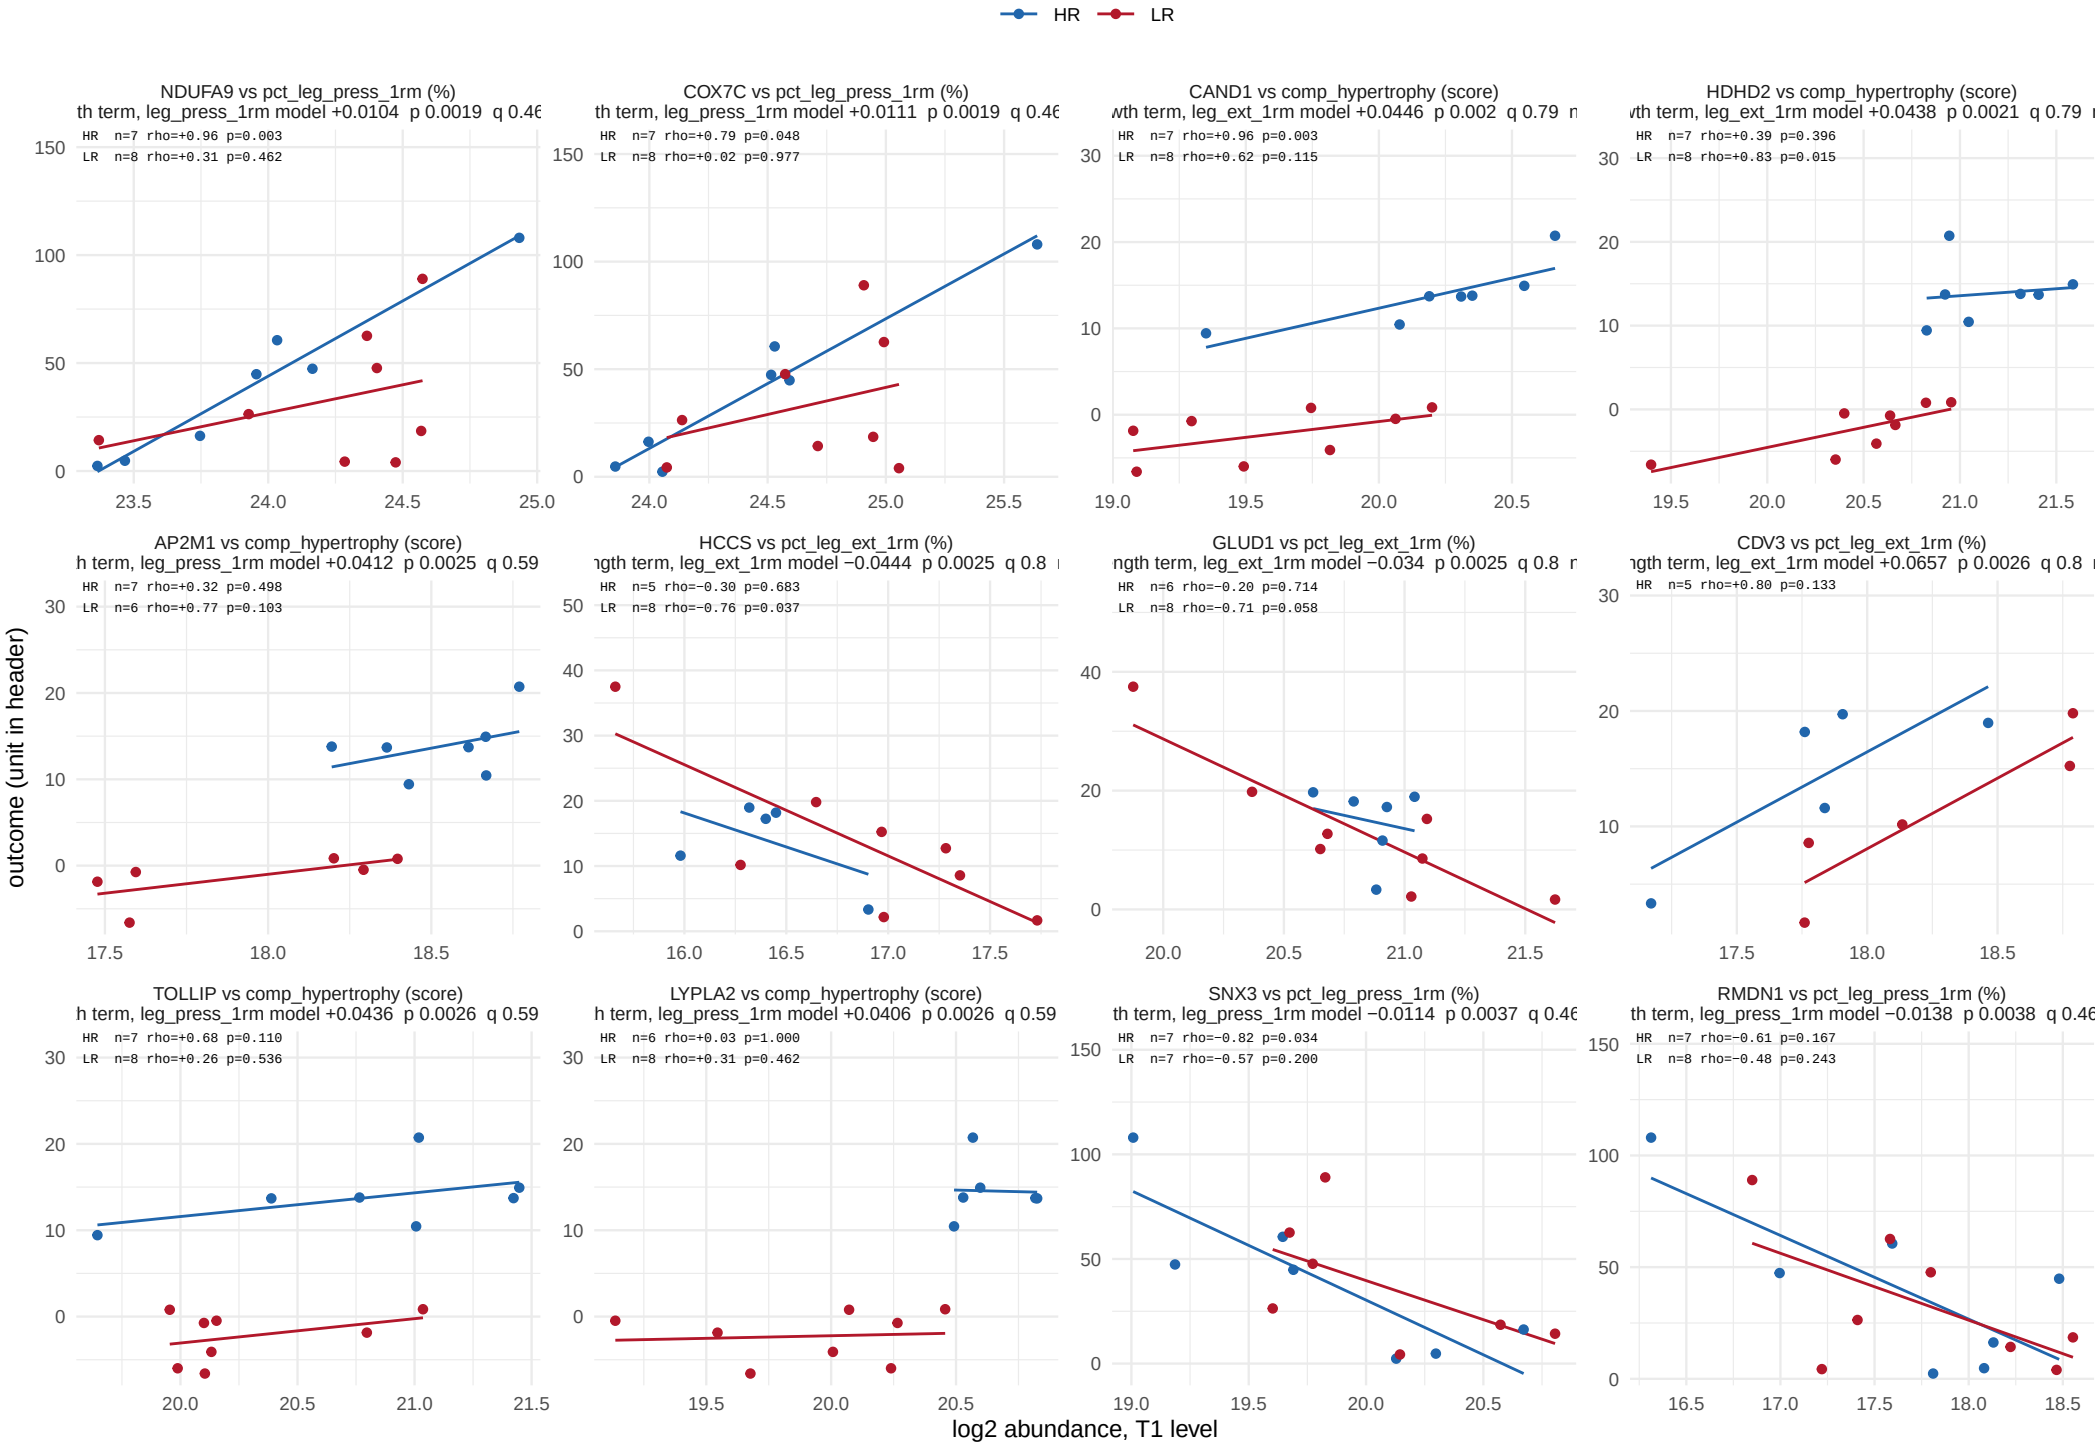

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, baseline window


357 of 6218 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 3 of 30.

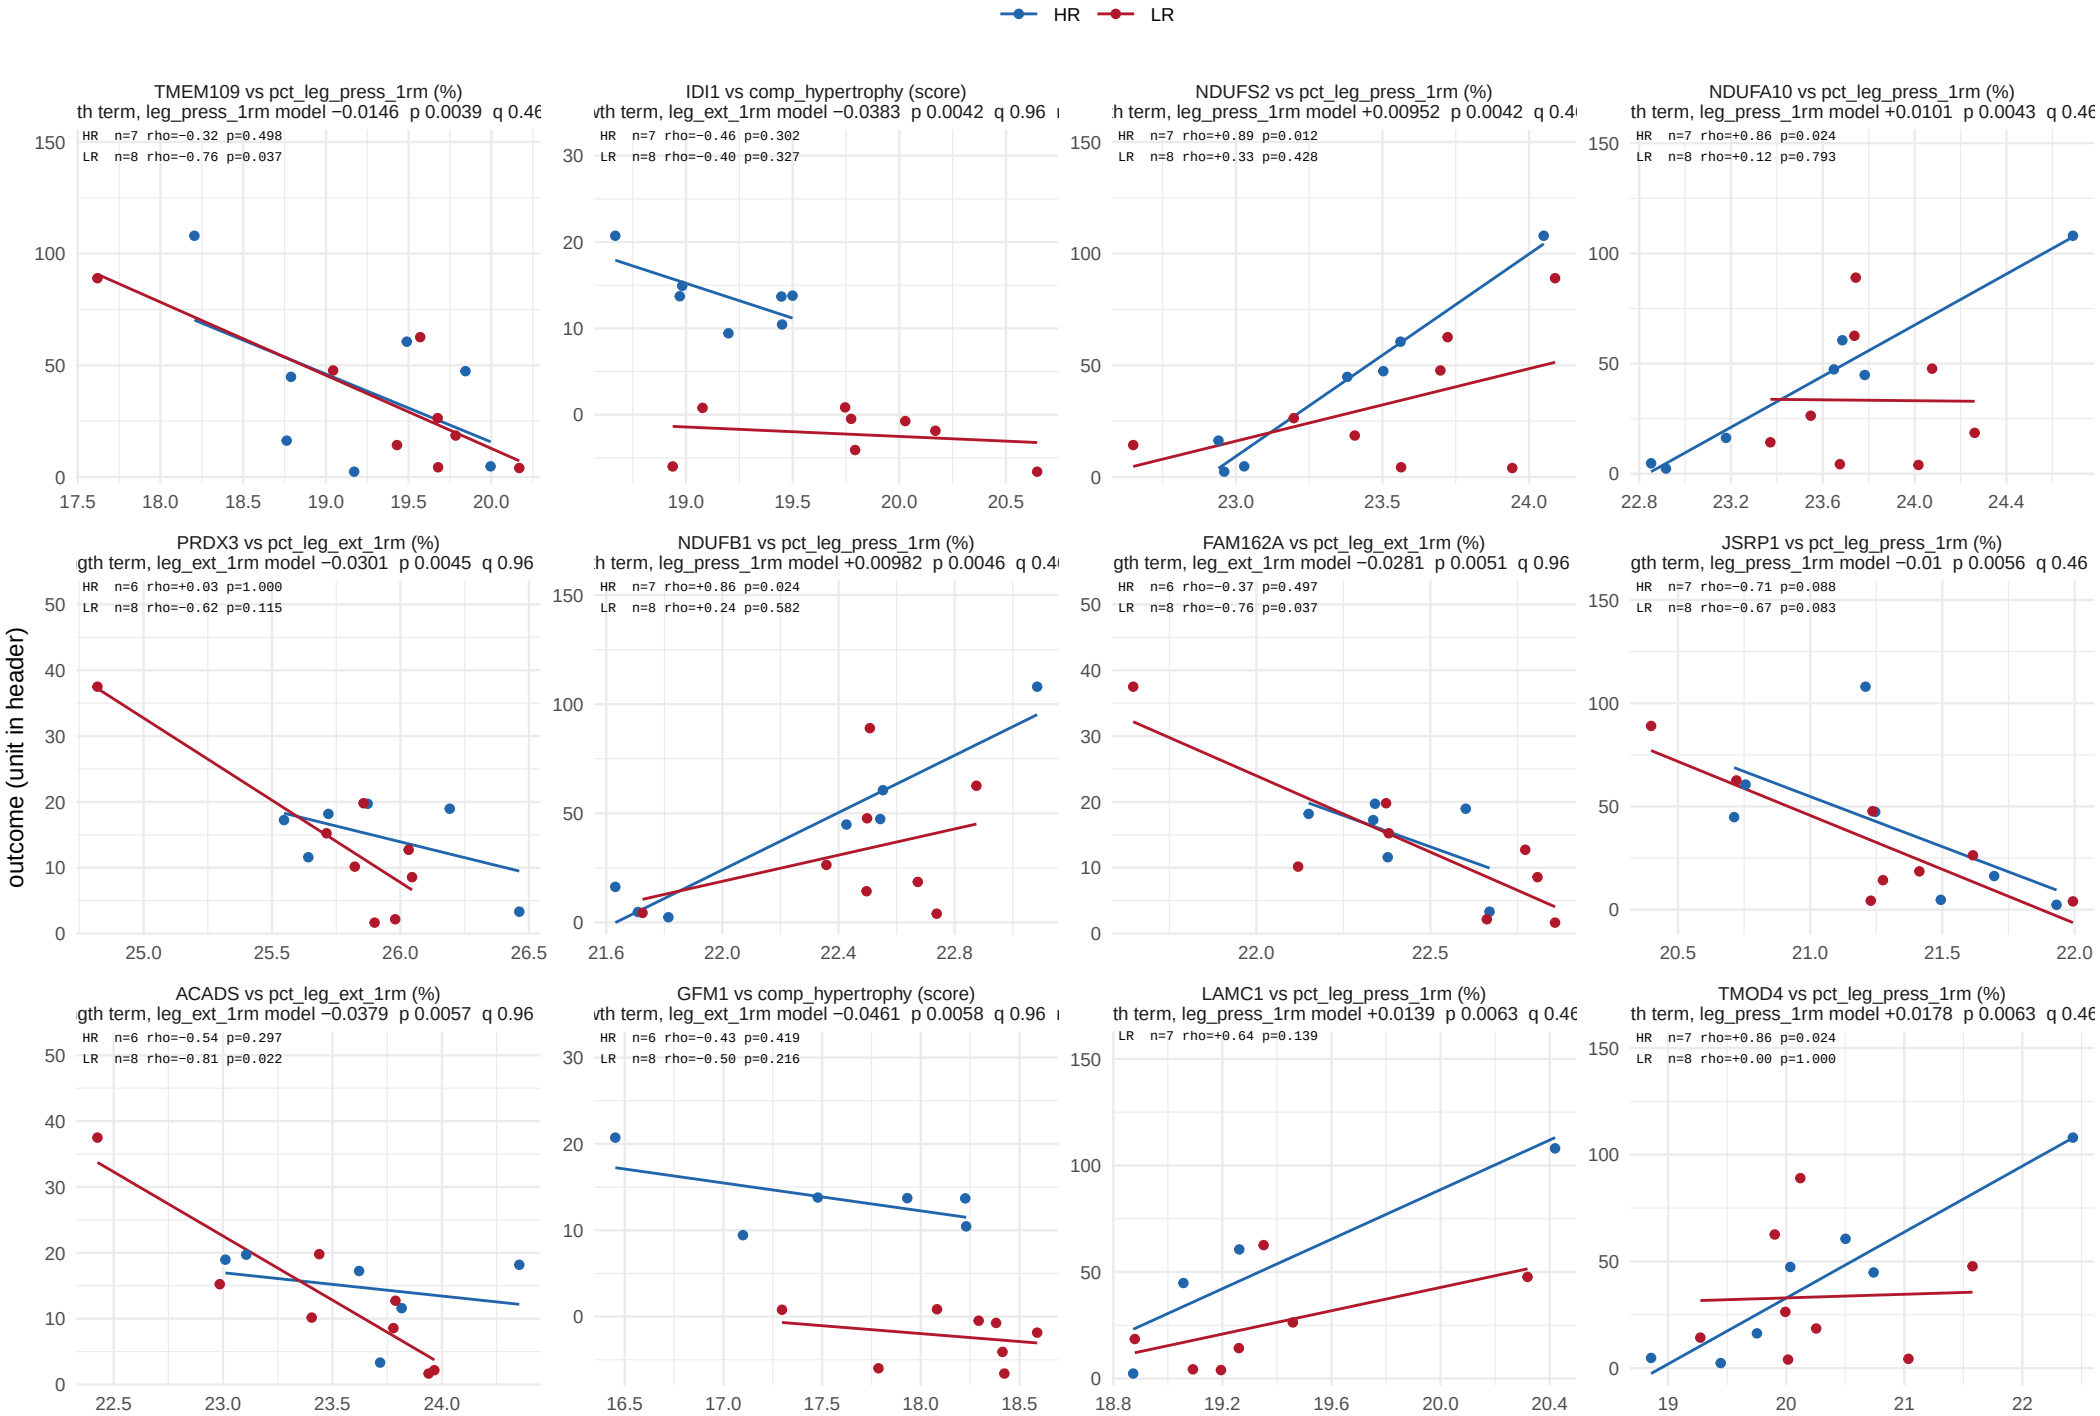

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, baseline window


357 of 6218 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 4 of 30.

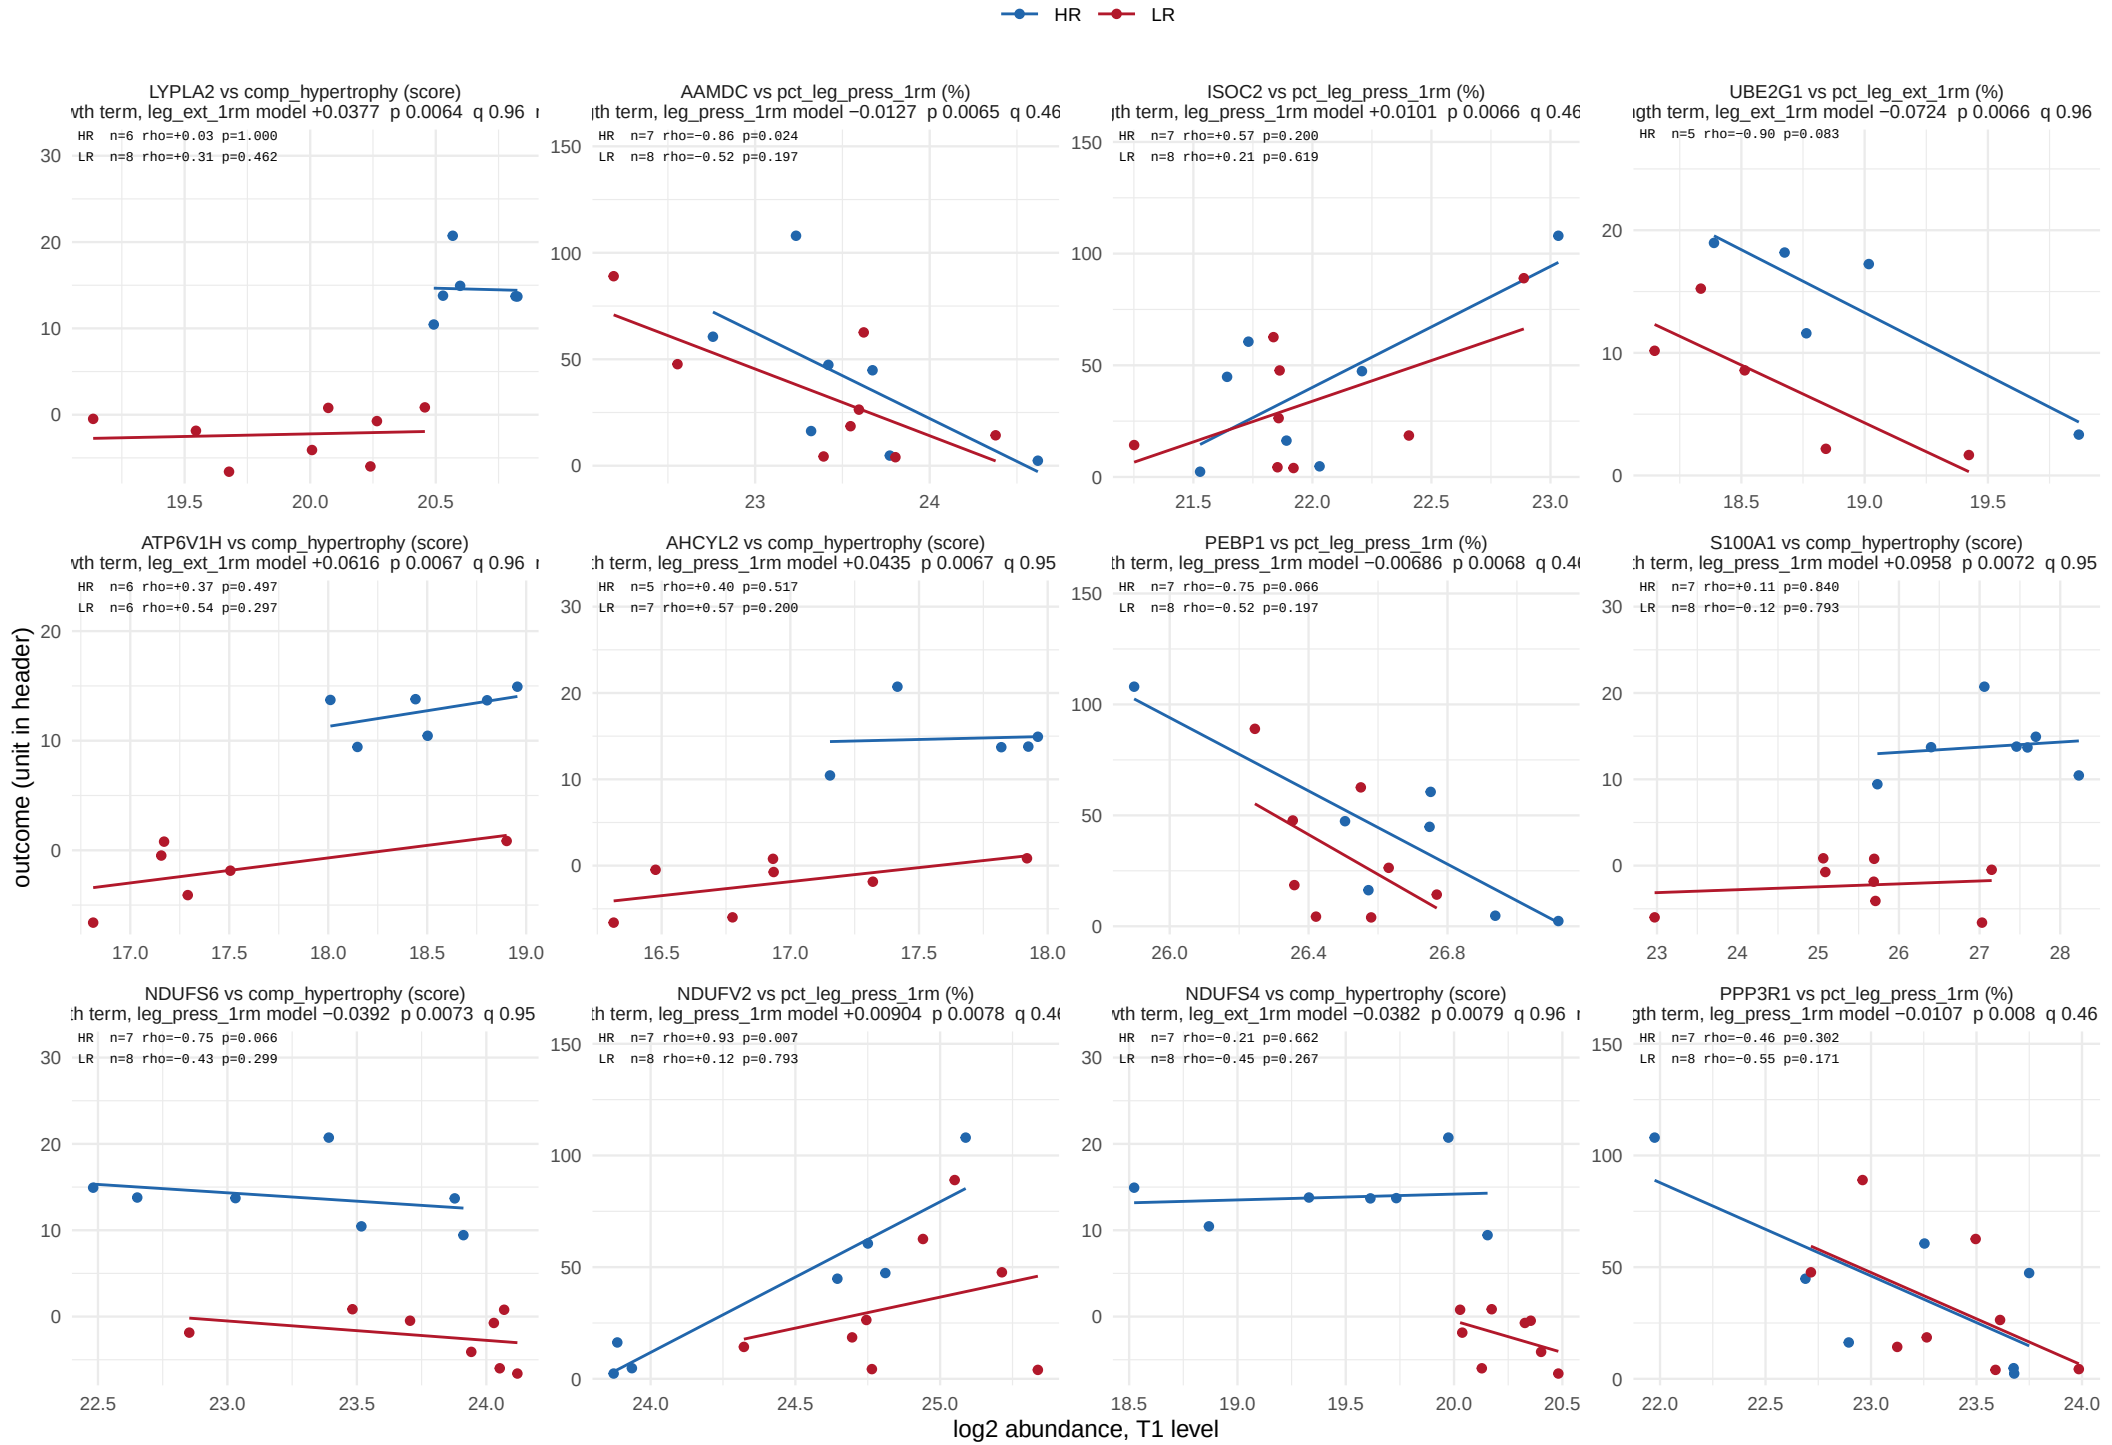

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, baseline window


357 of 6218 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 5 of 30.

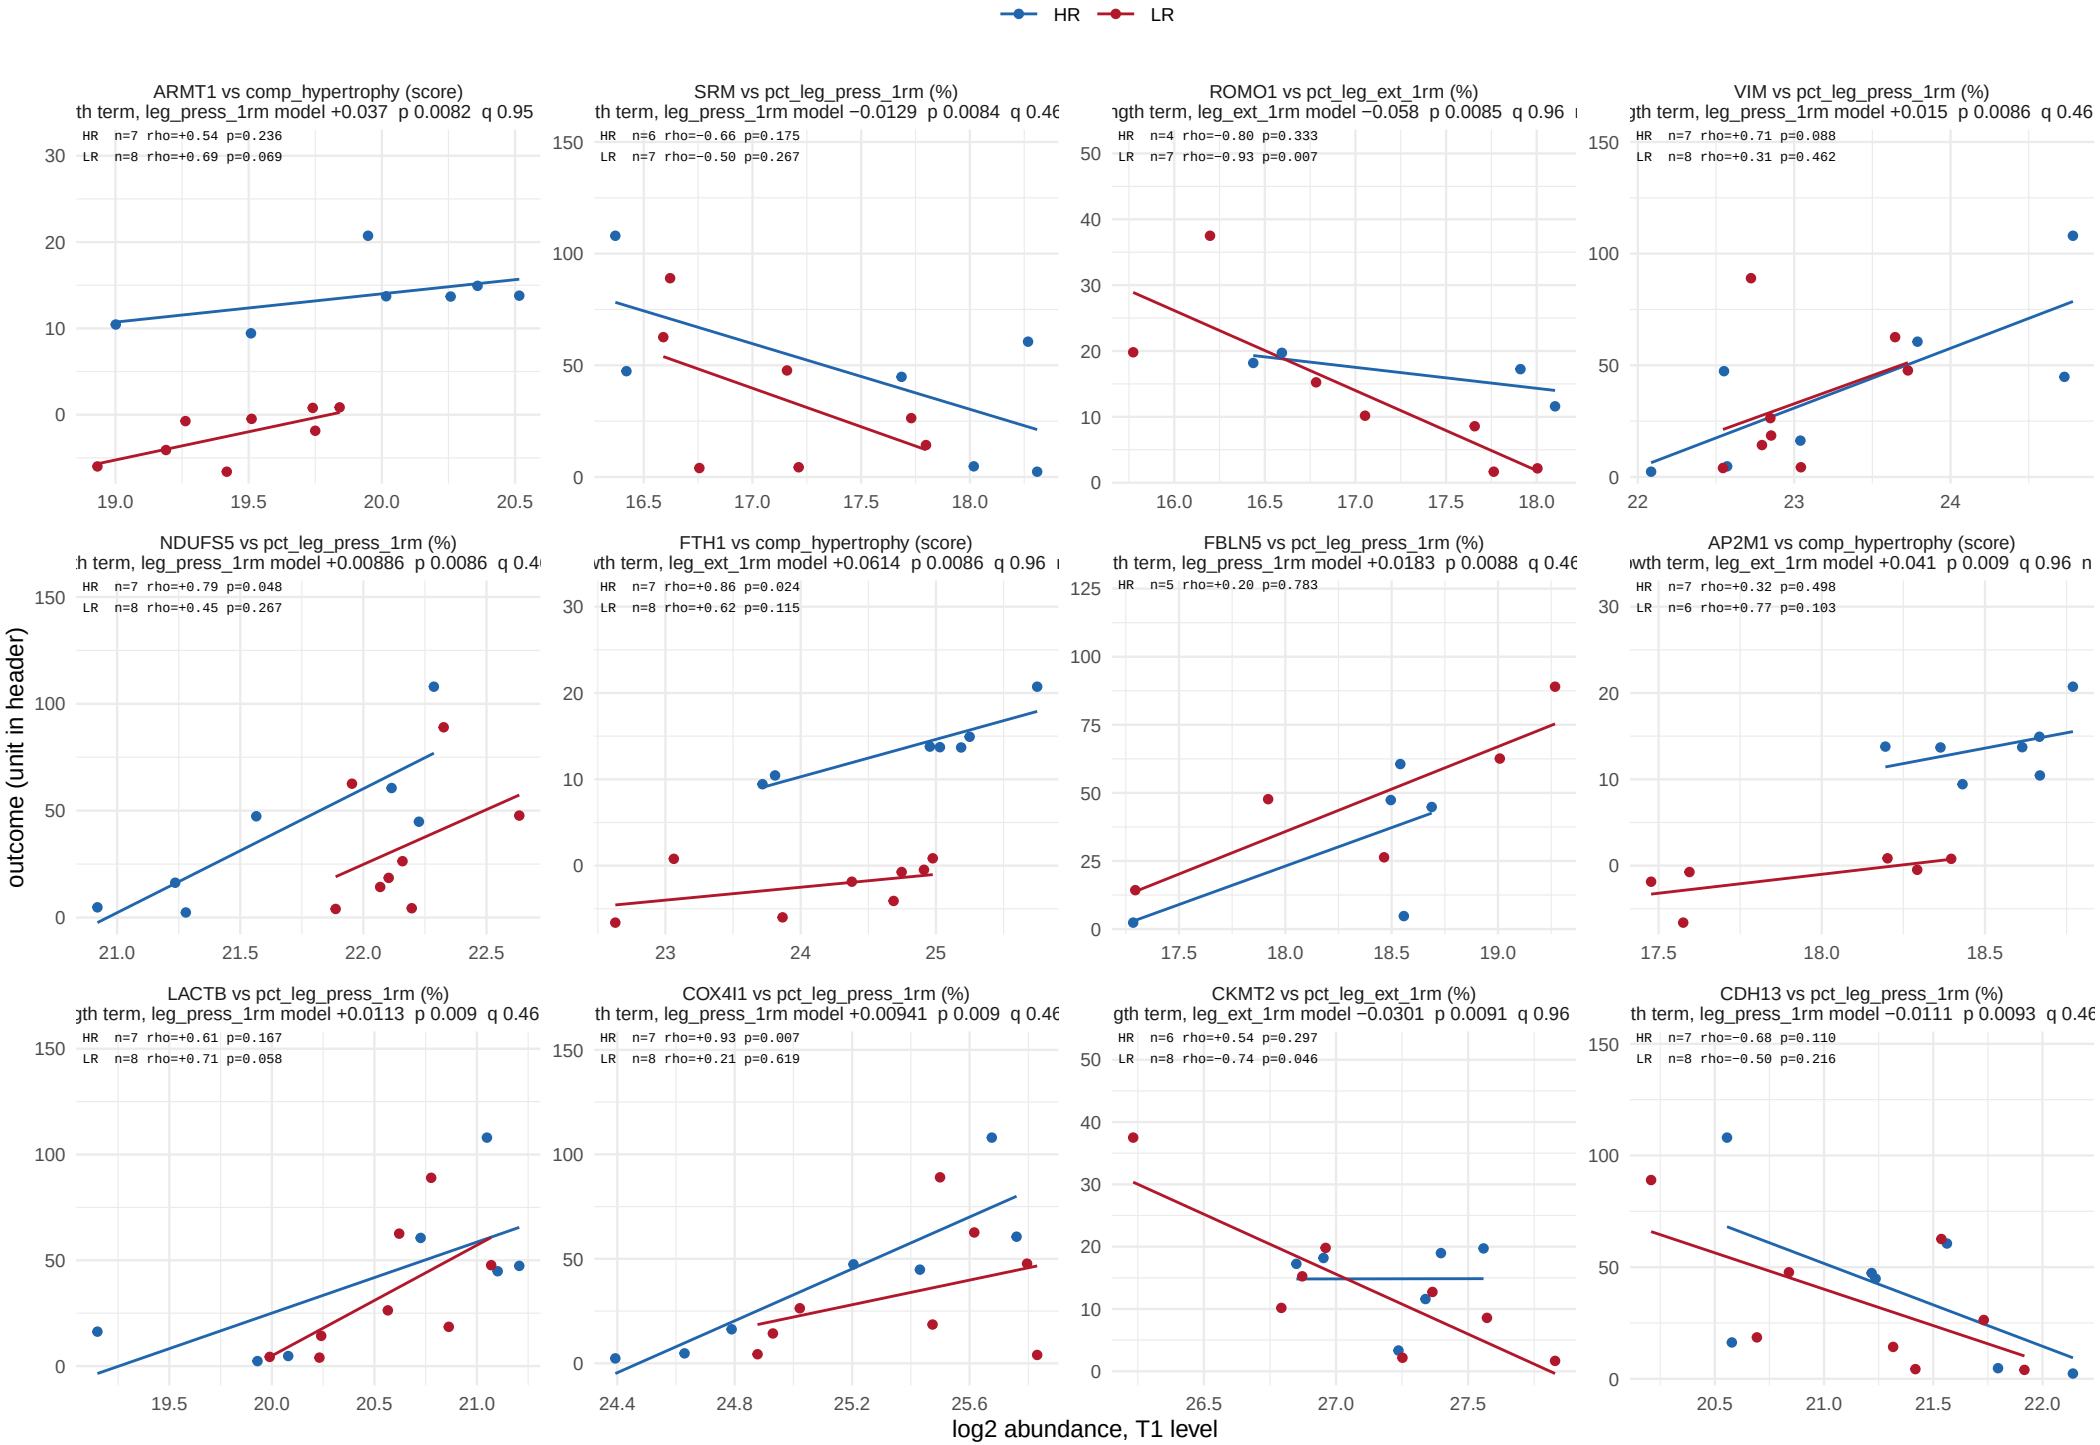

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, baseline window


357 of 6218 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 6 of 30.

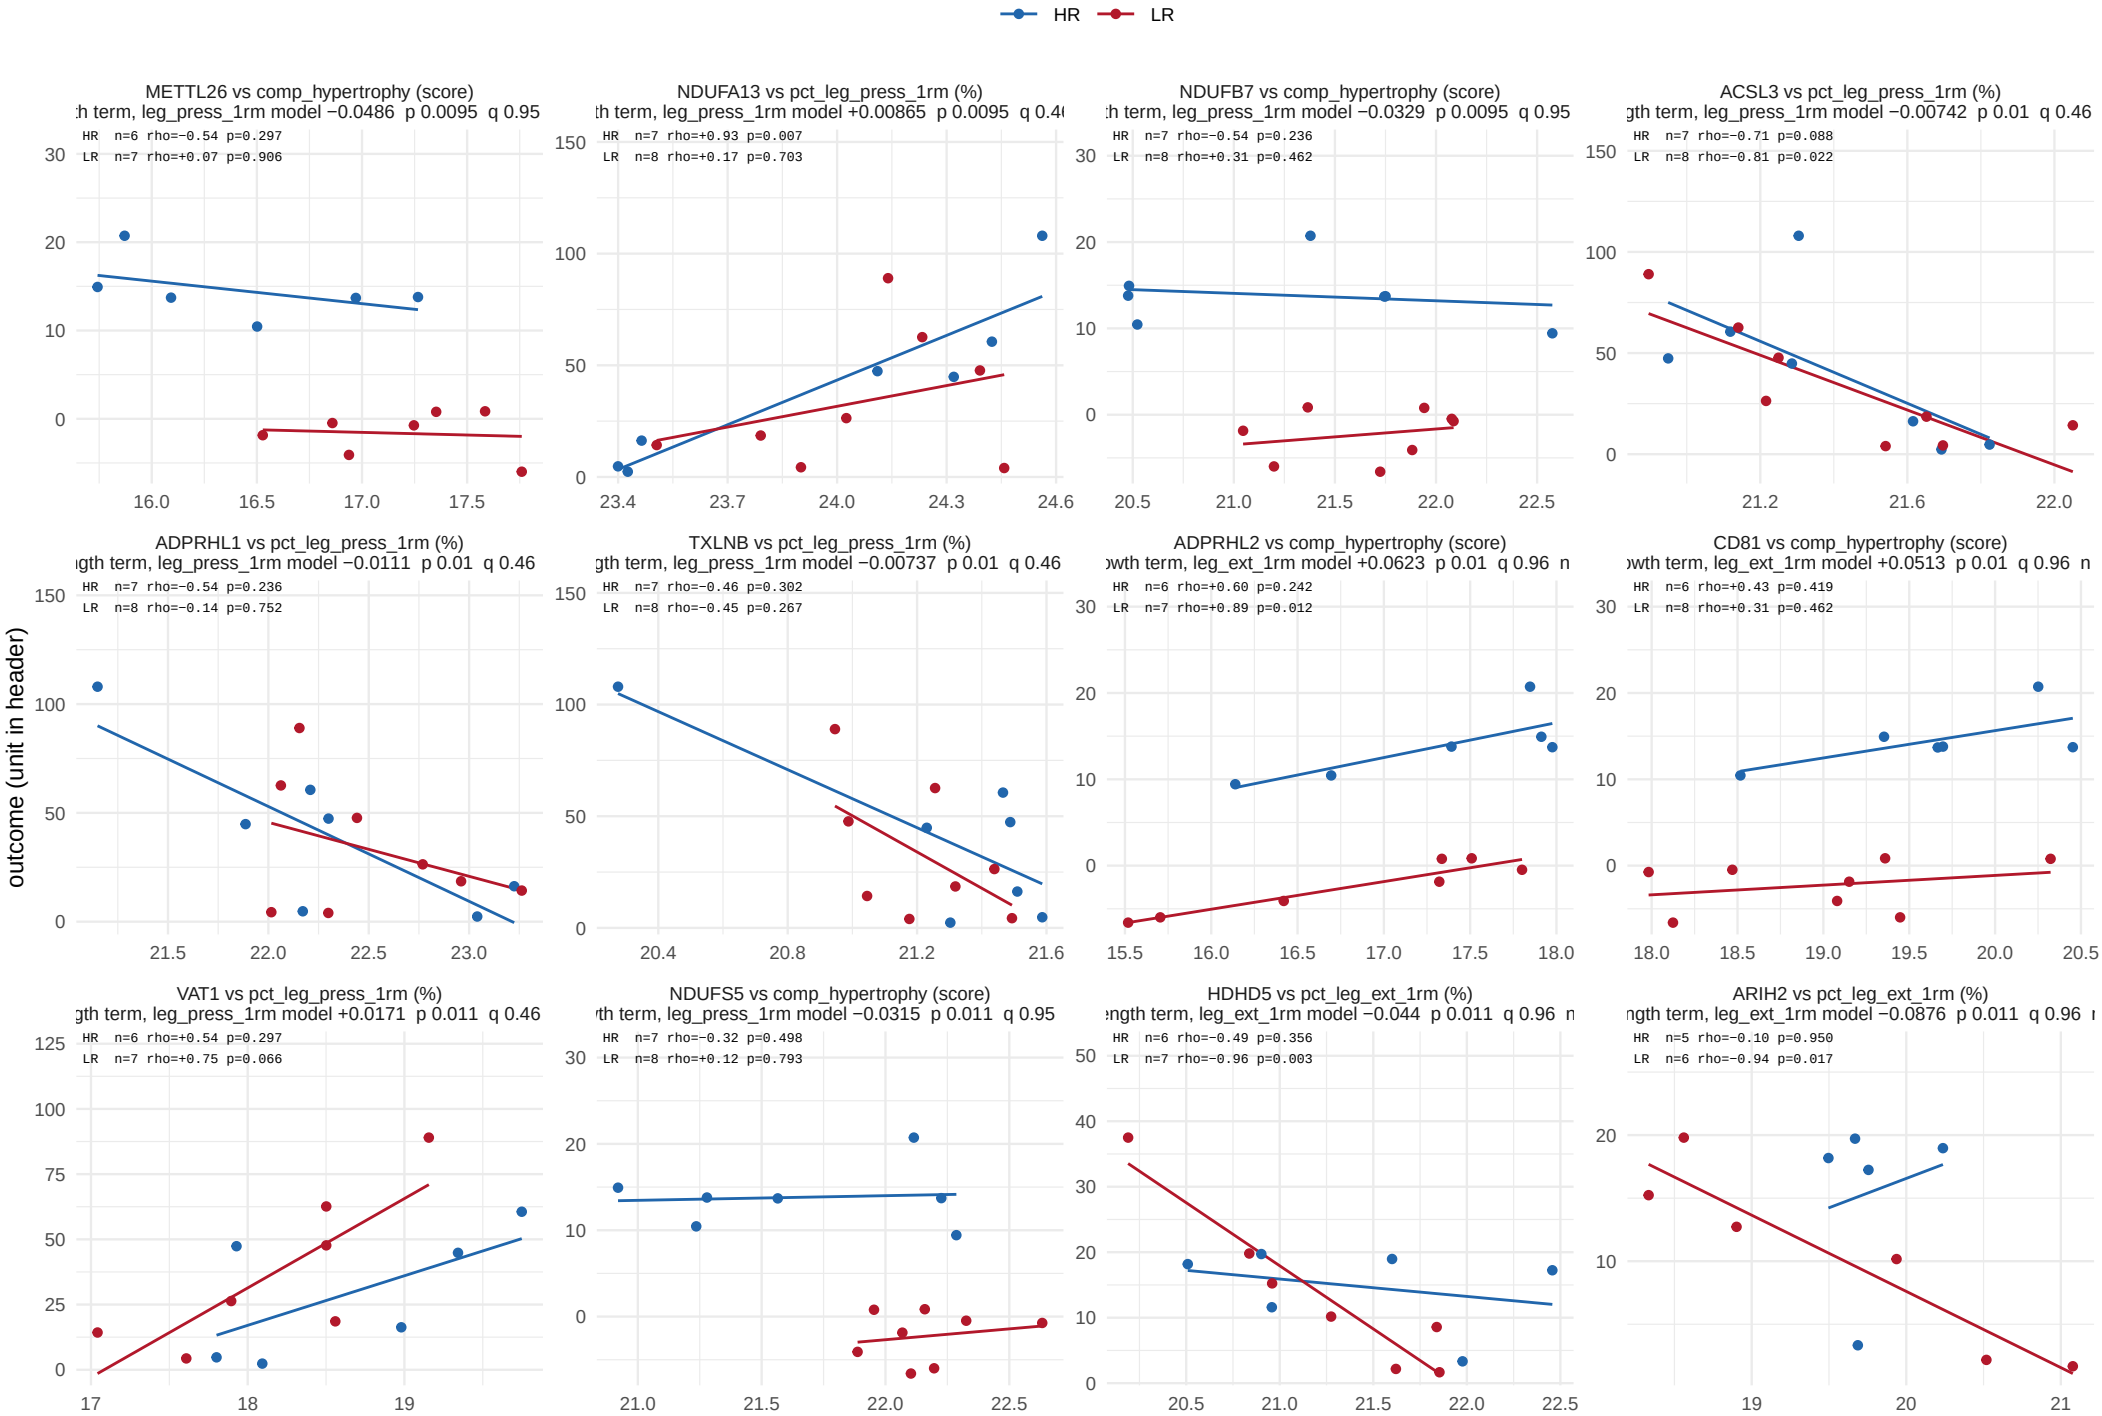

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, baseline window


357 of 6218 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 7 of 30.

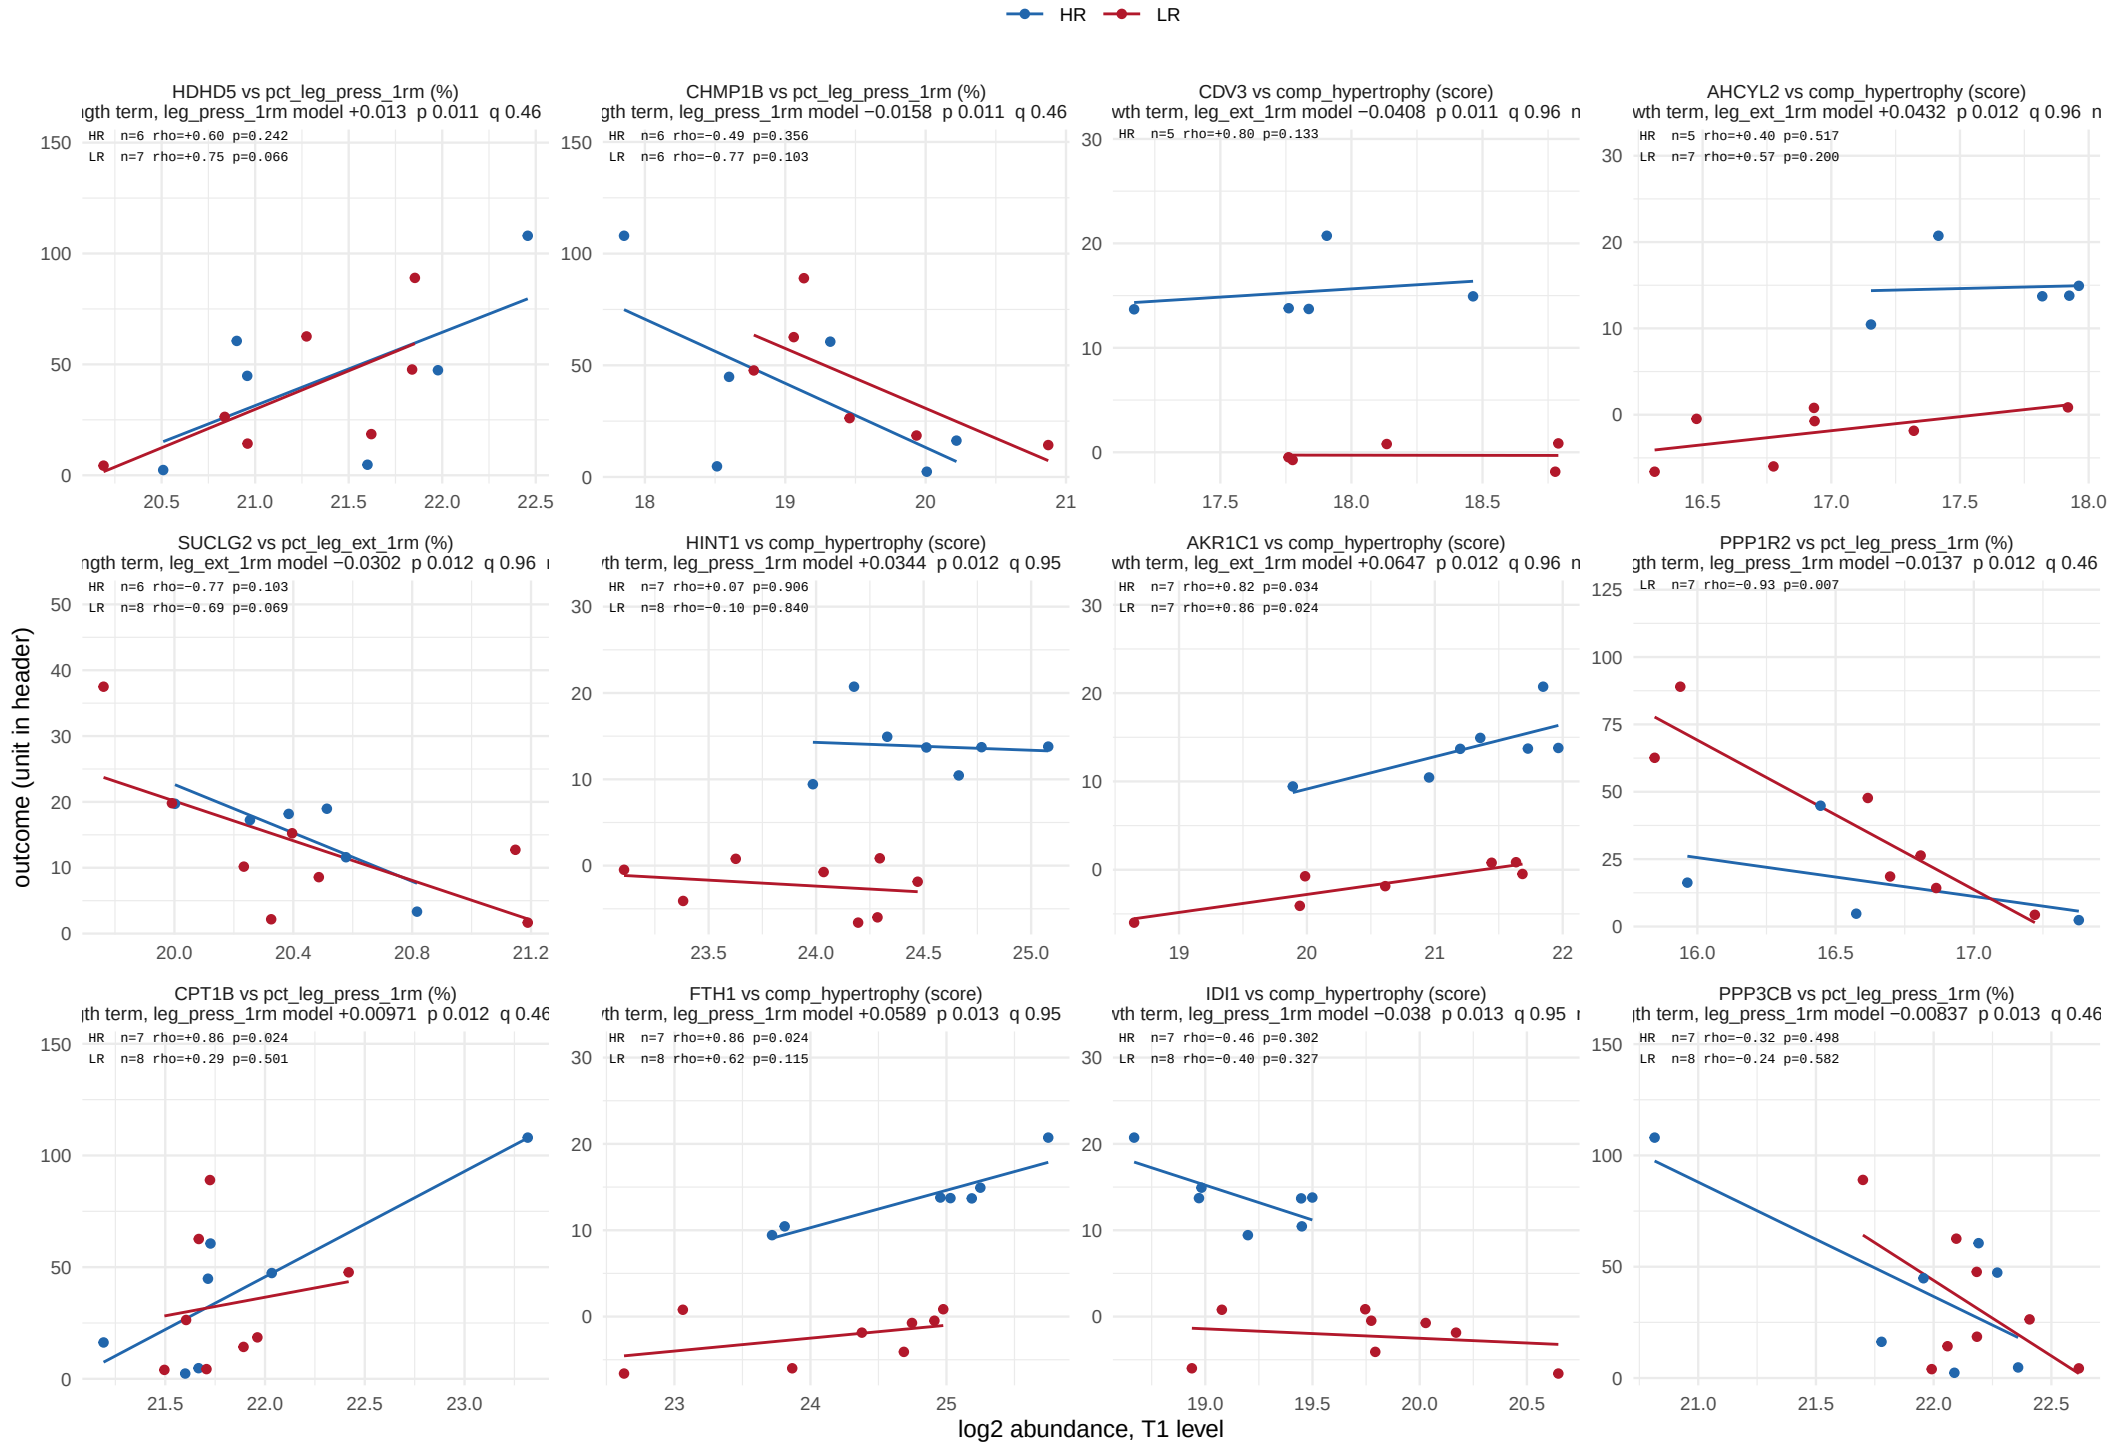

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, baseline window


357 of 6218 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 8 of 30.

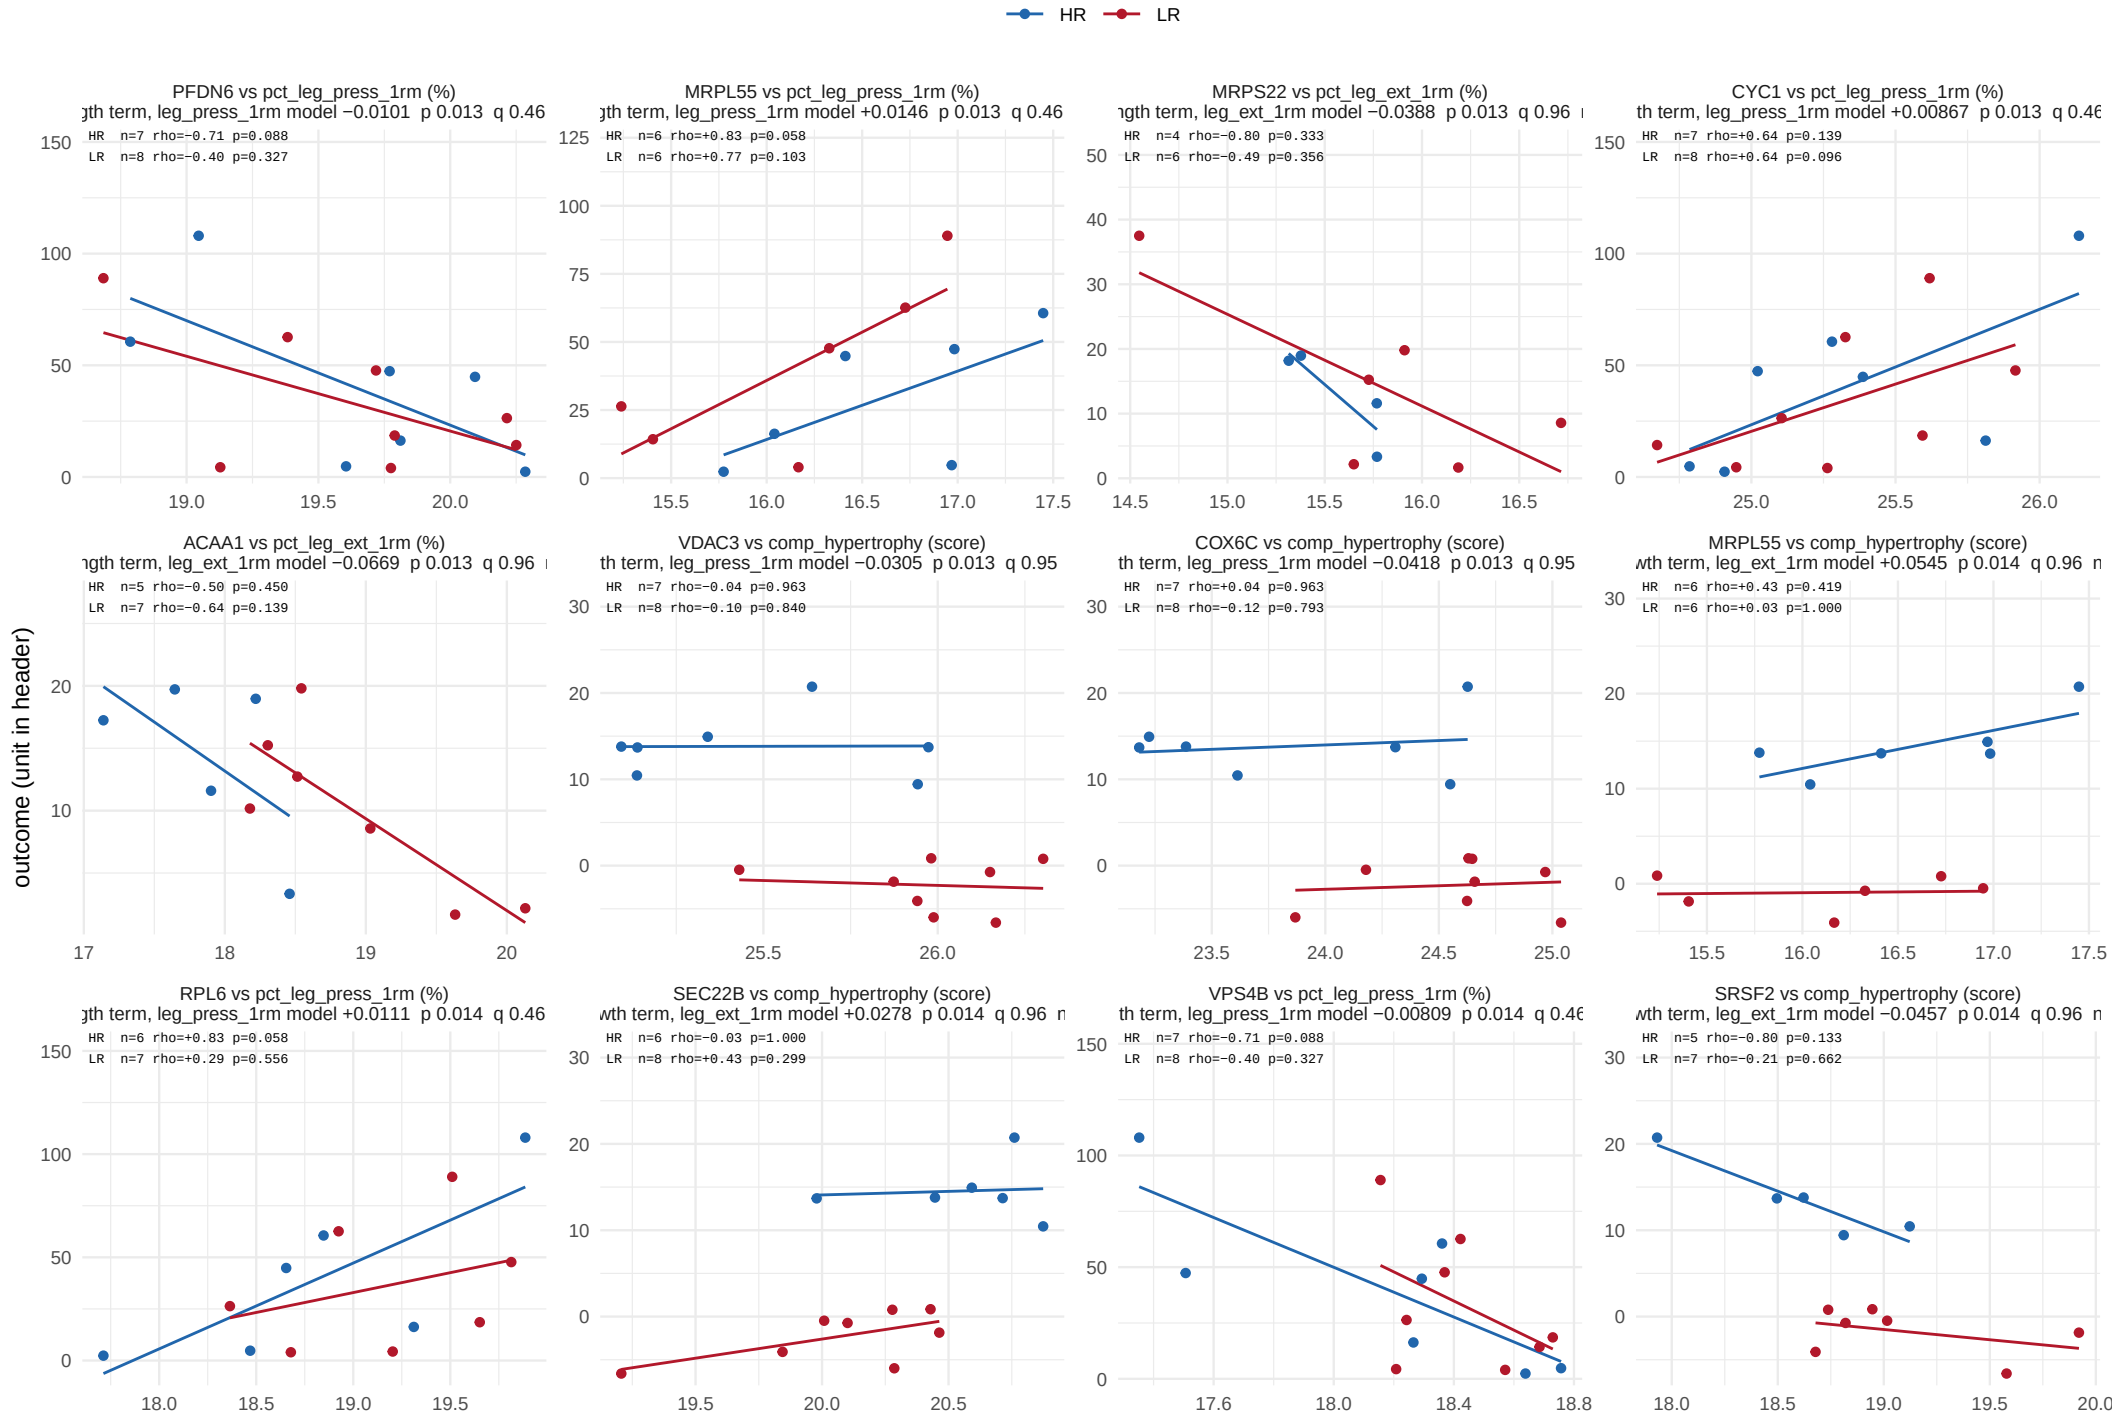

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, baseline window


357 of 6218 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 9 of 30.

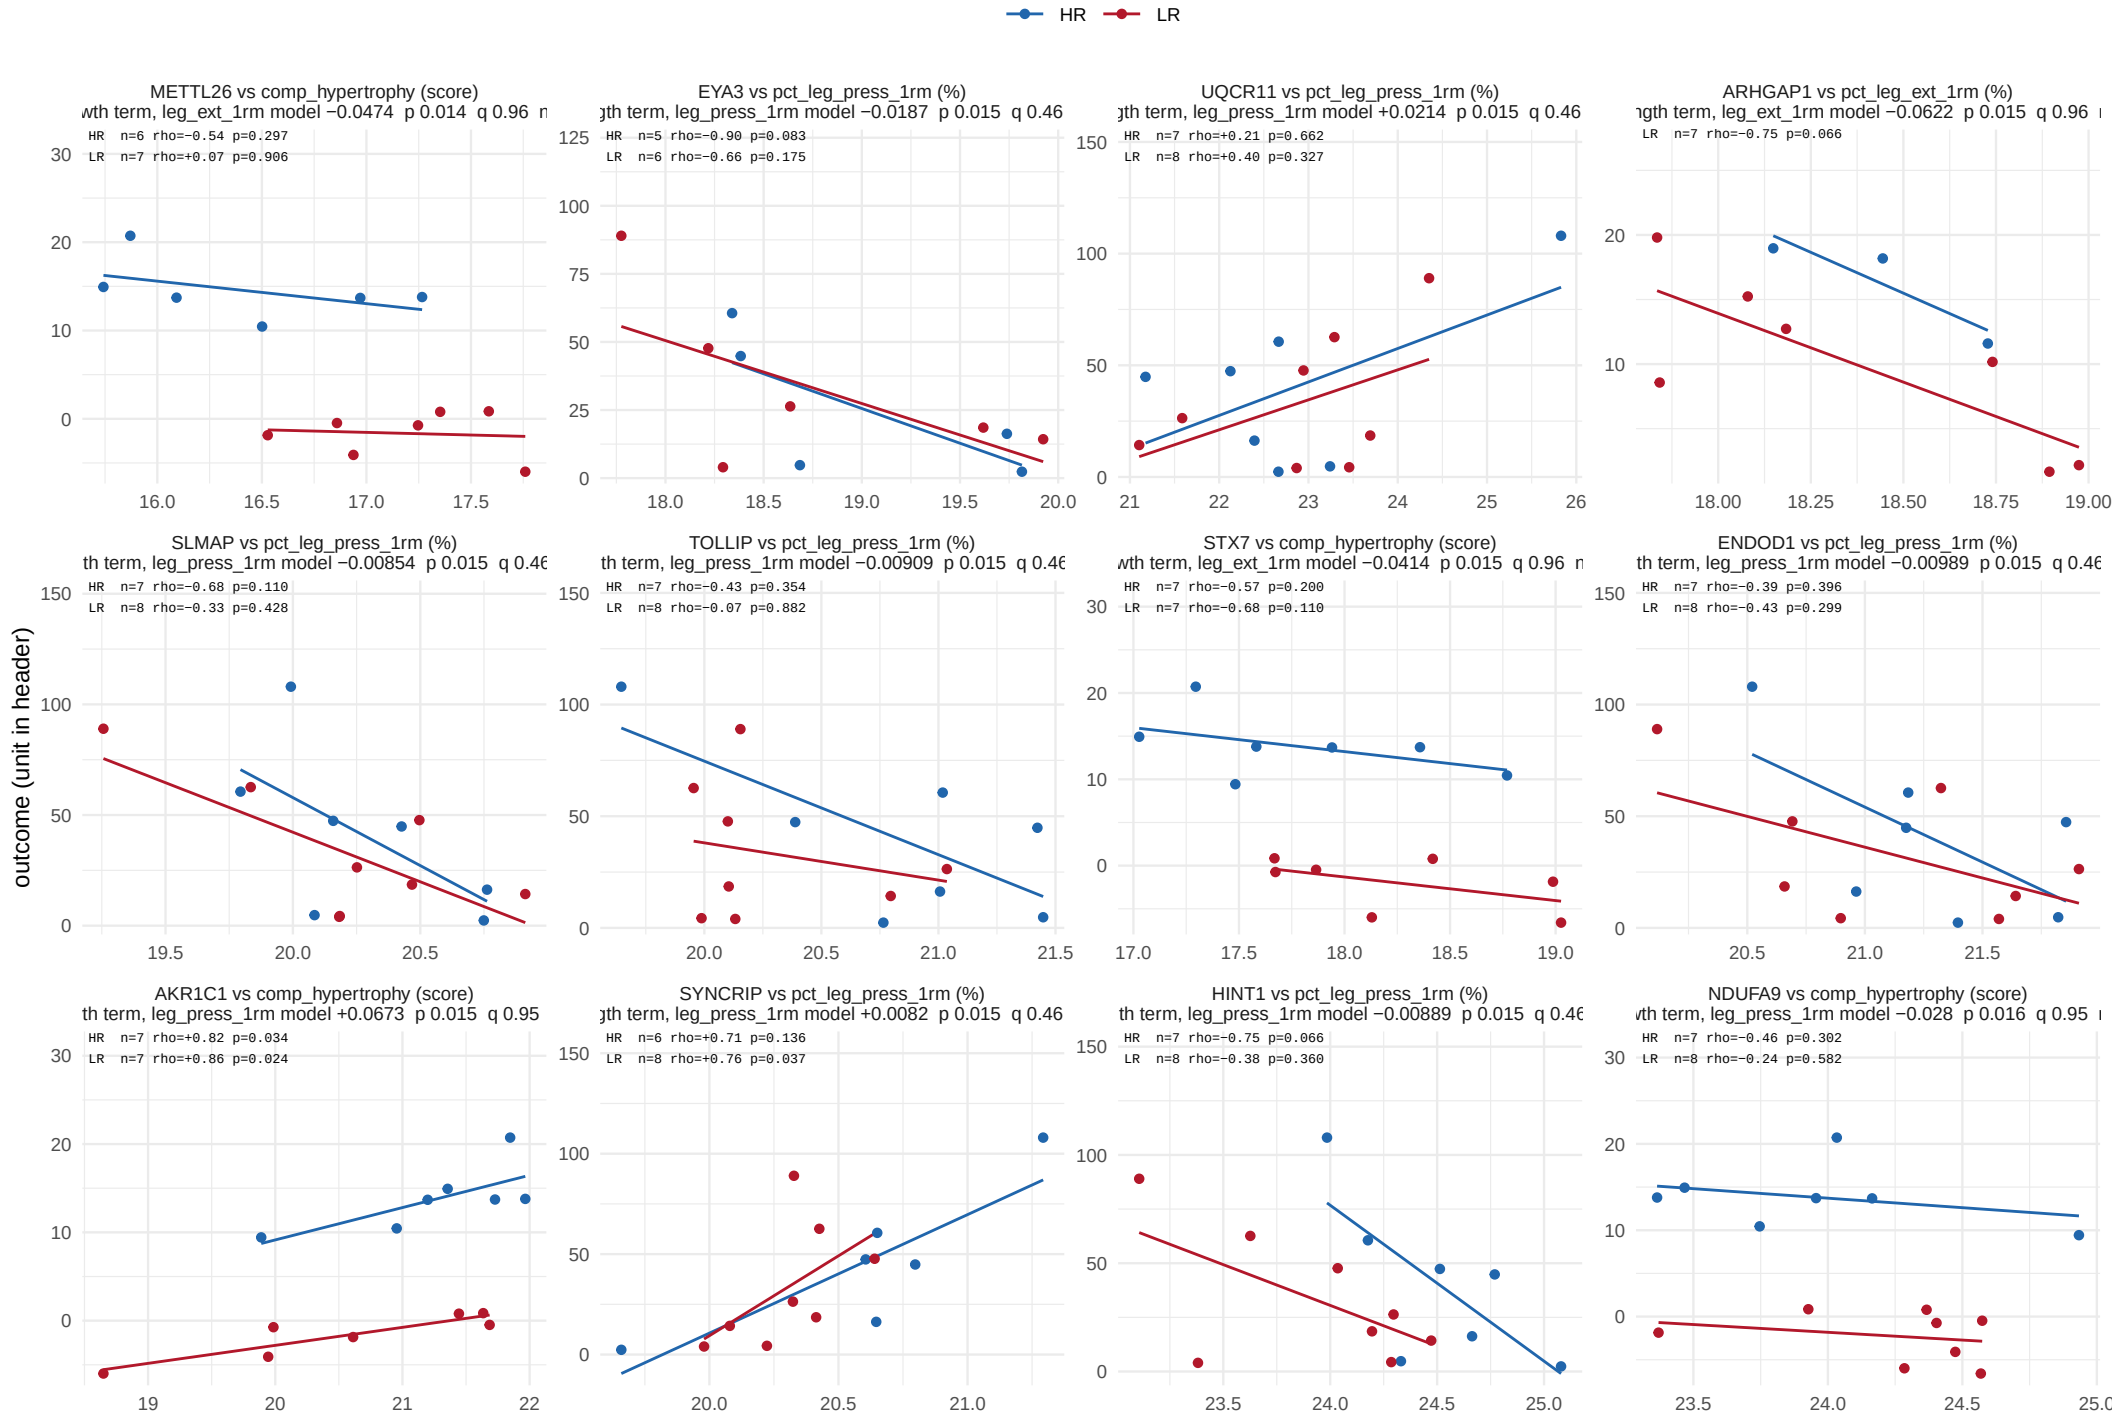

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, baseline window


357 of 6218 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 10 of 30.

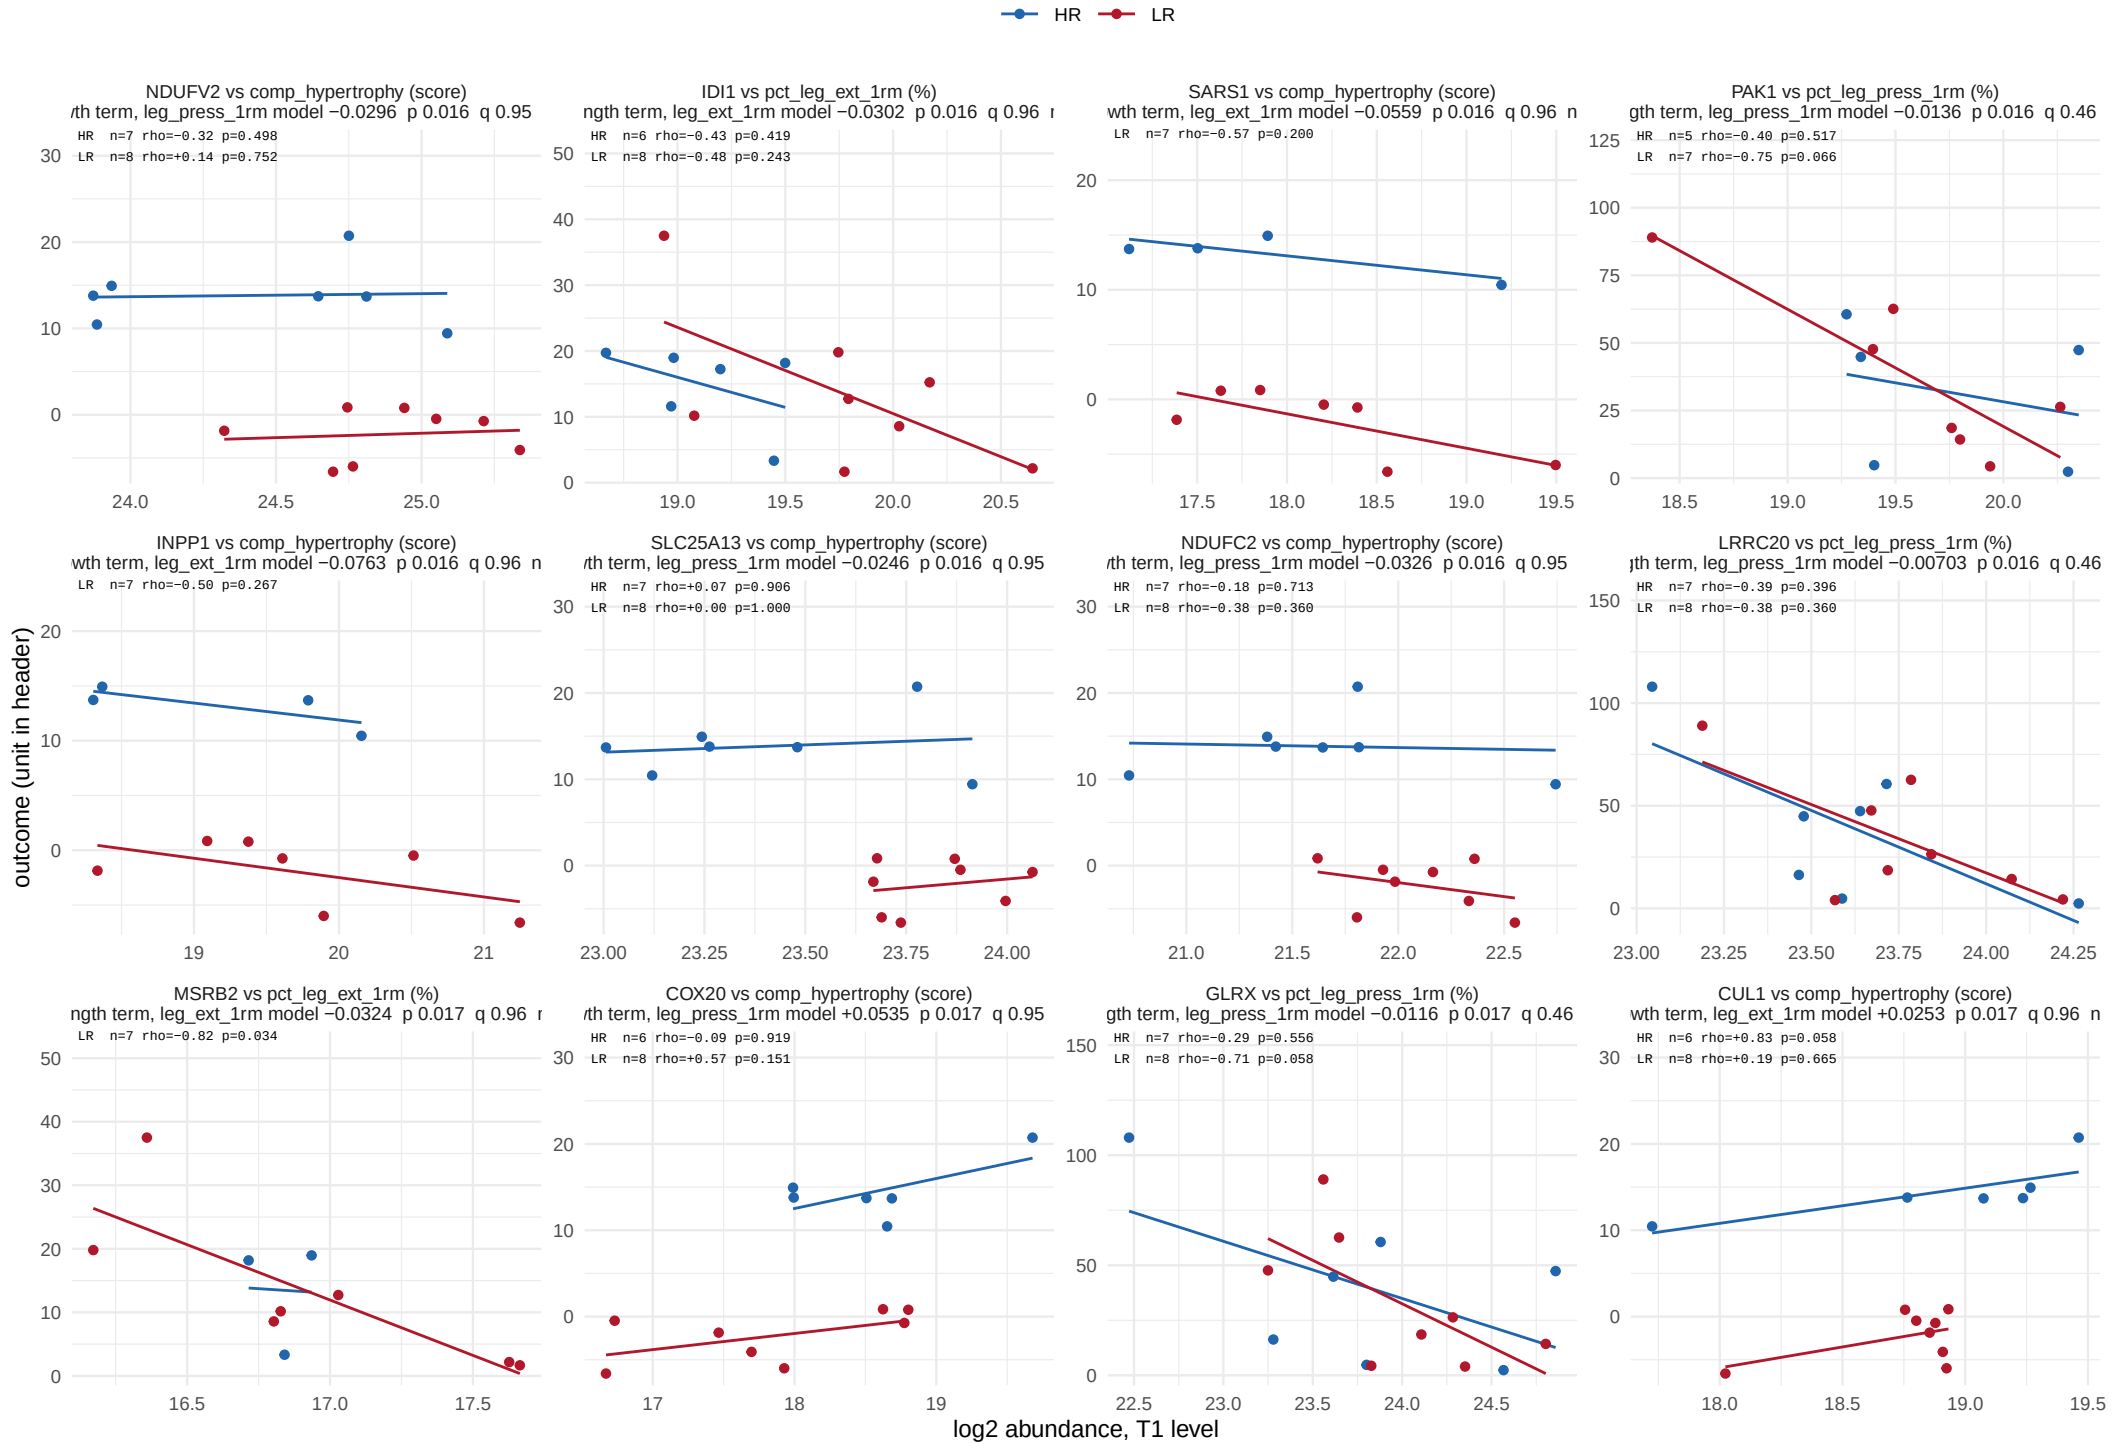

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, baseline window


357 of 6218 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 11 of 30.

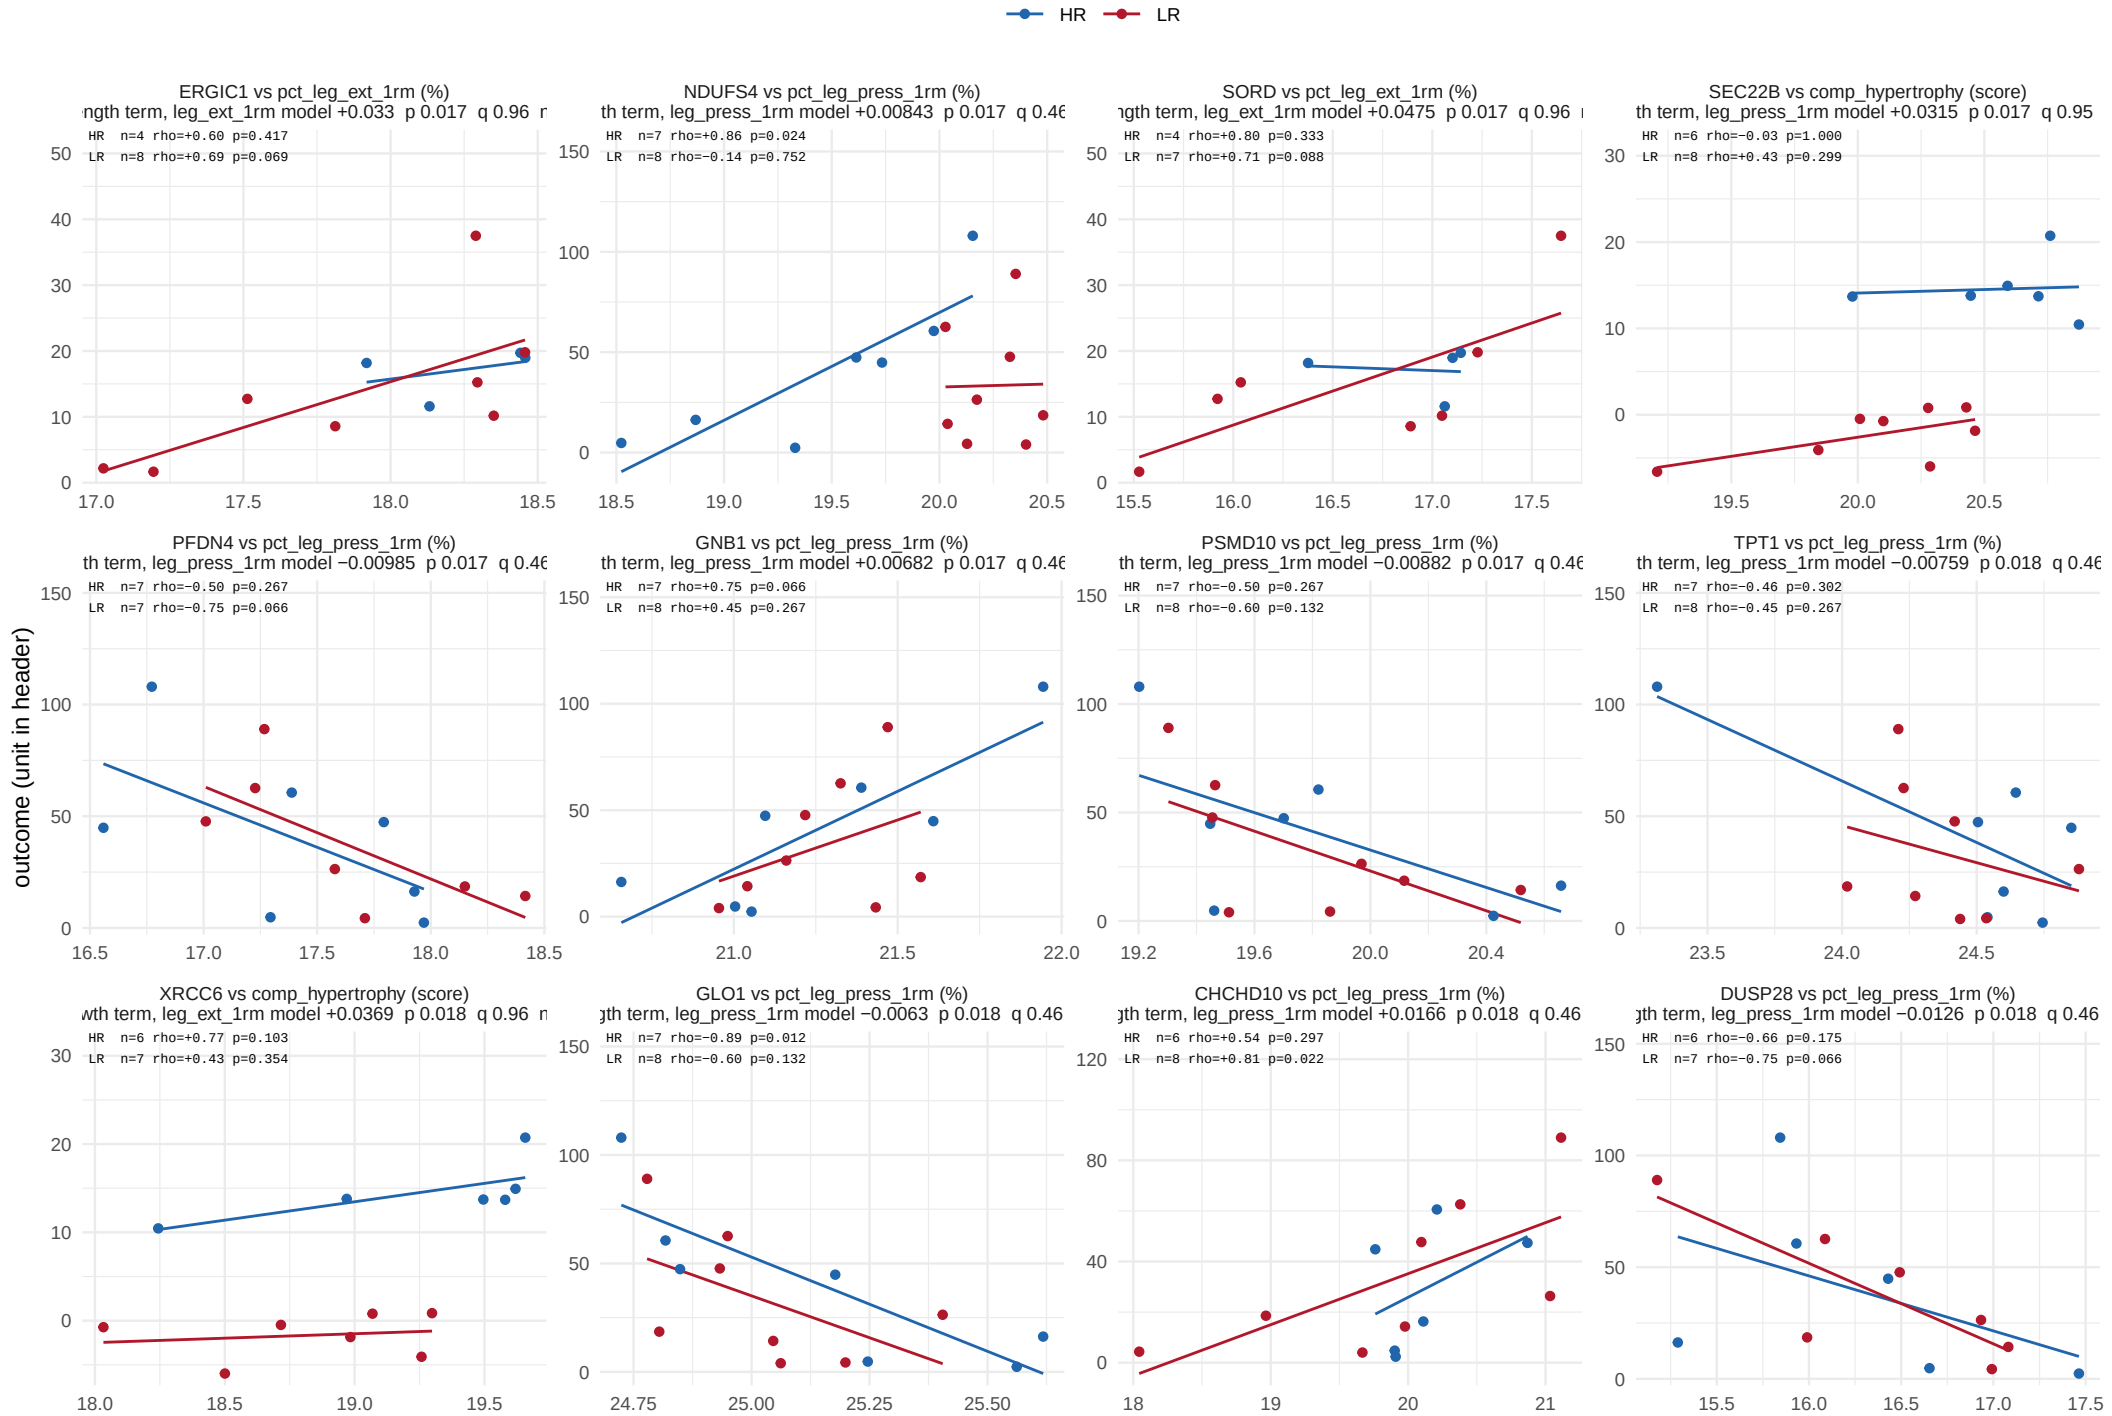

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, baseline window


357 of 6218 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 12 of 30.

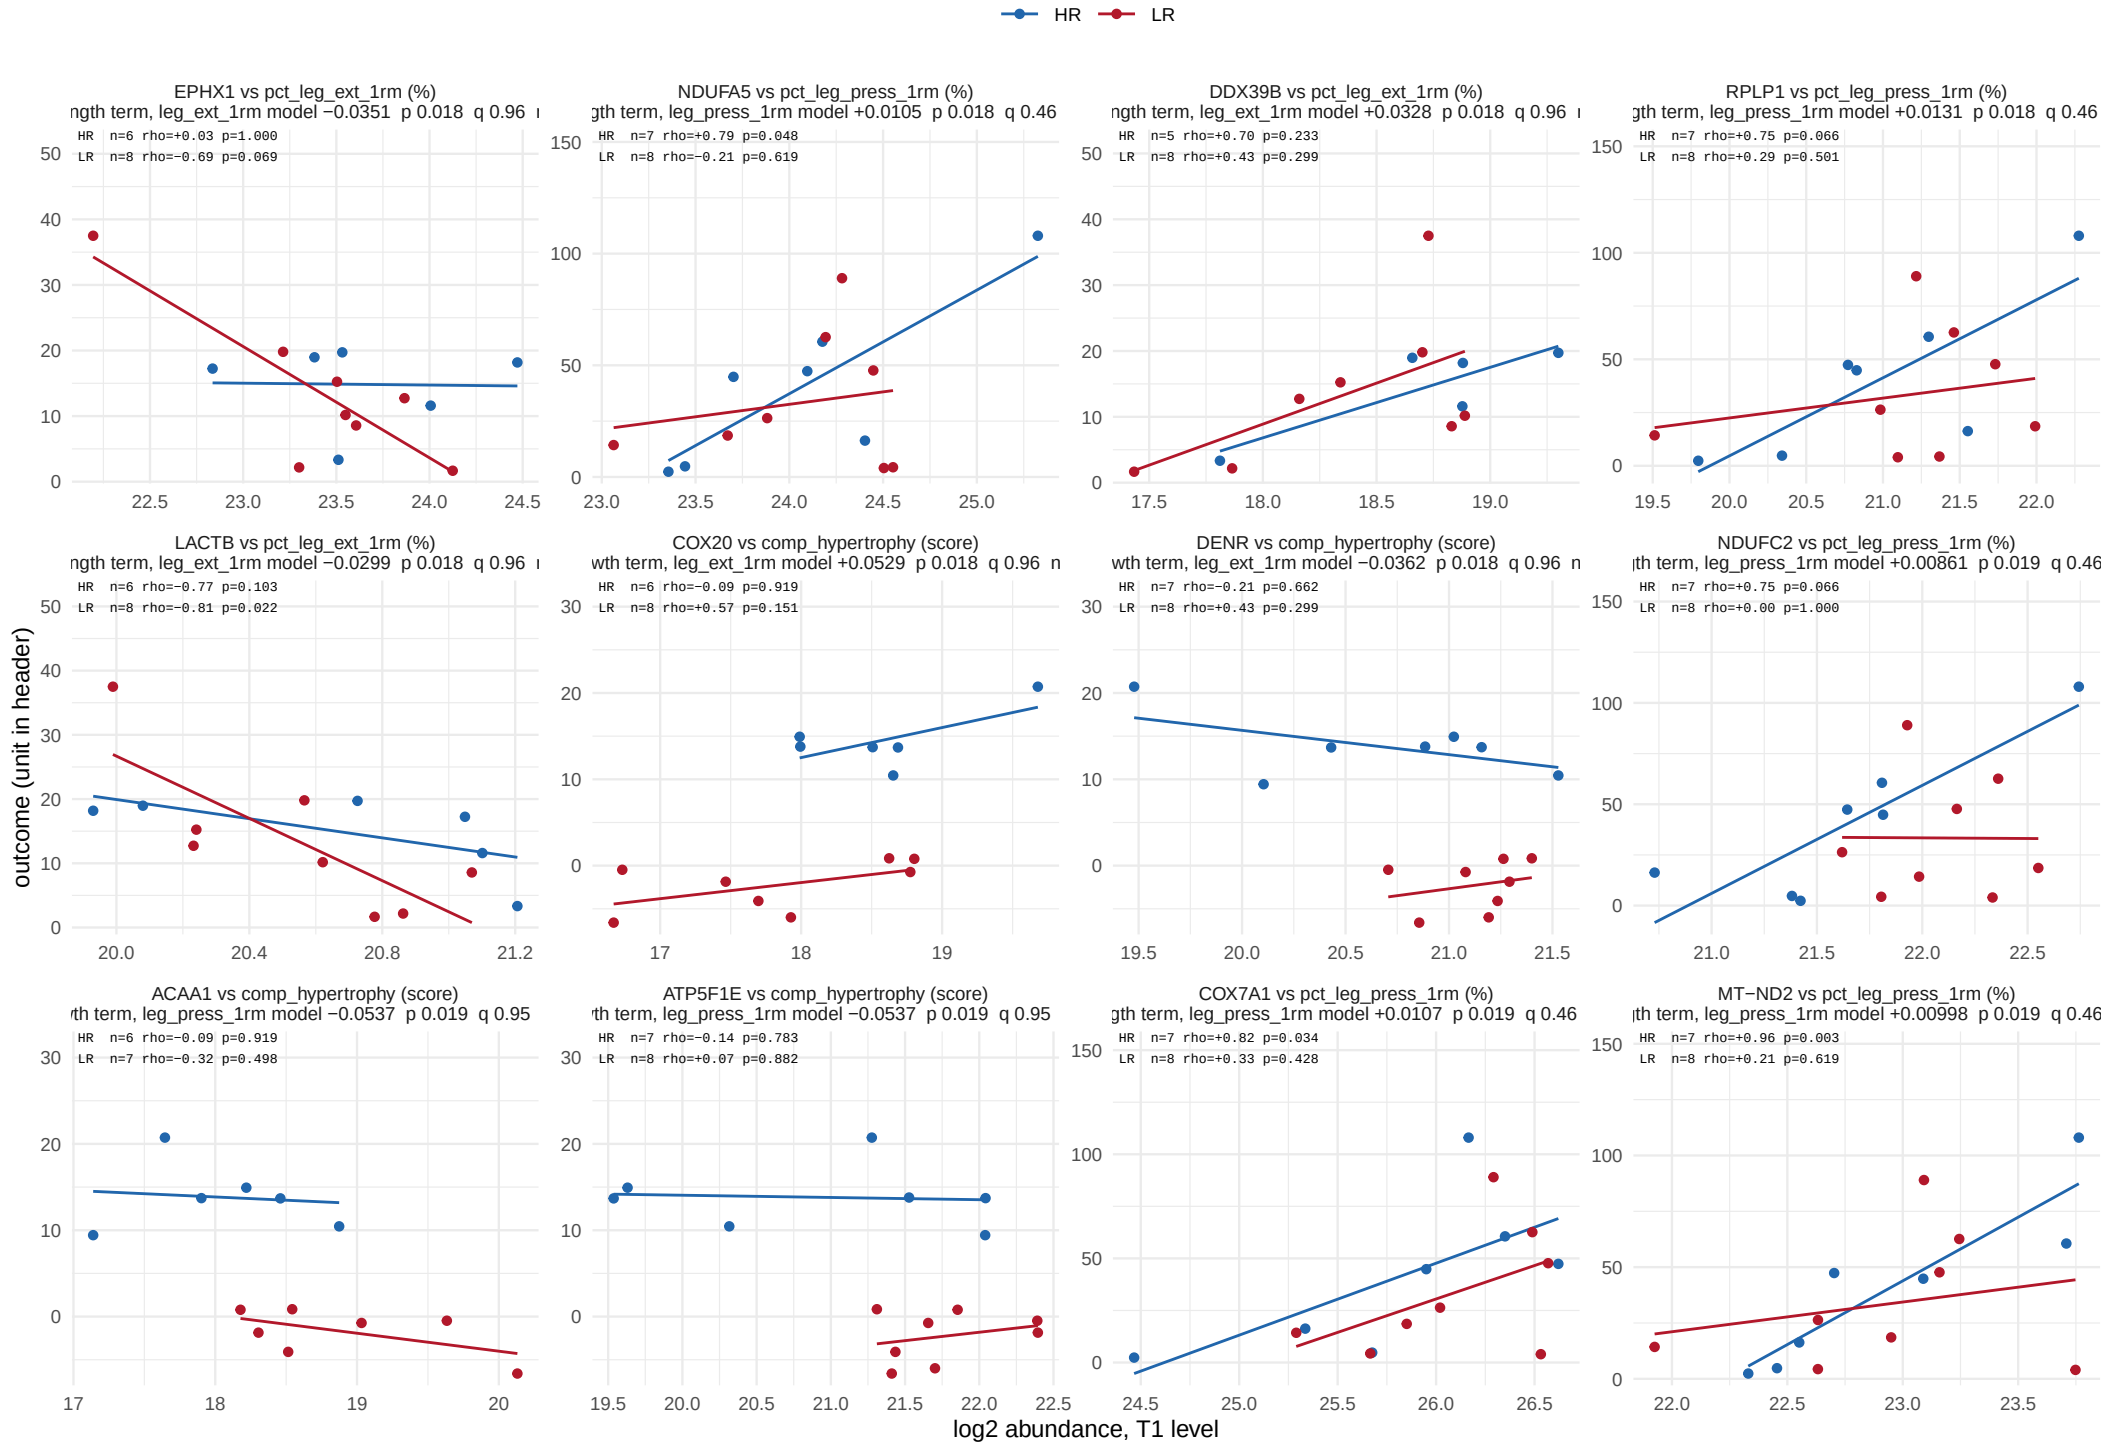

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, baseline window


357 of 6218 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 13 of 30.

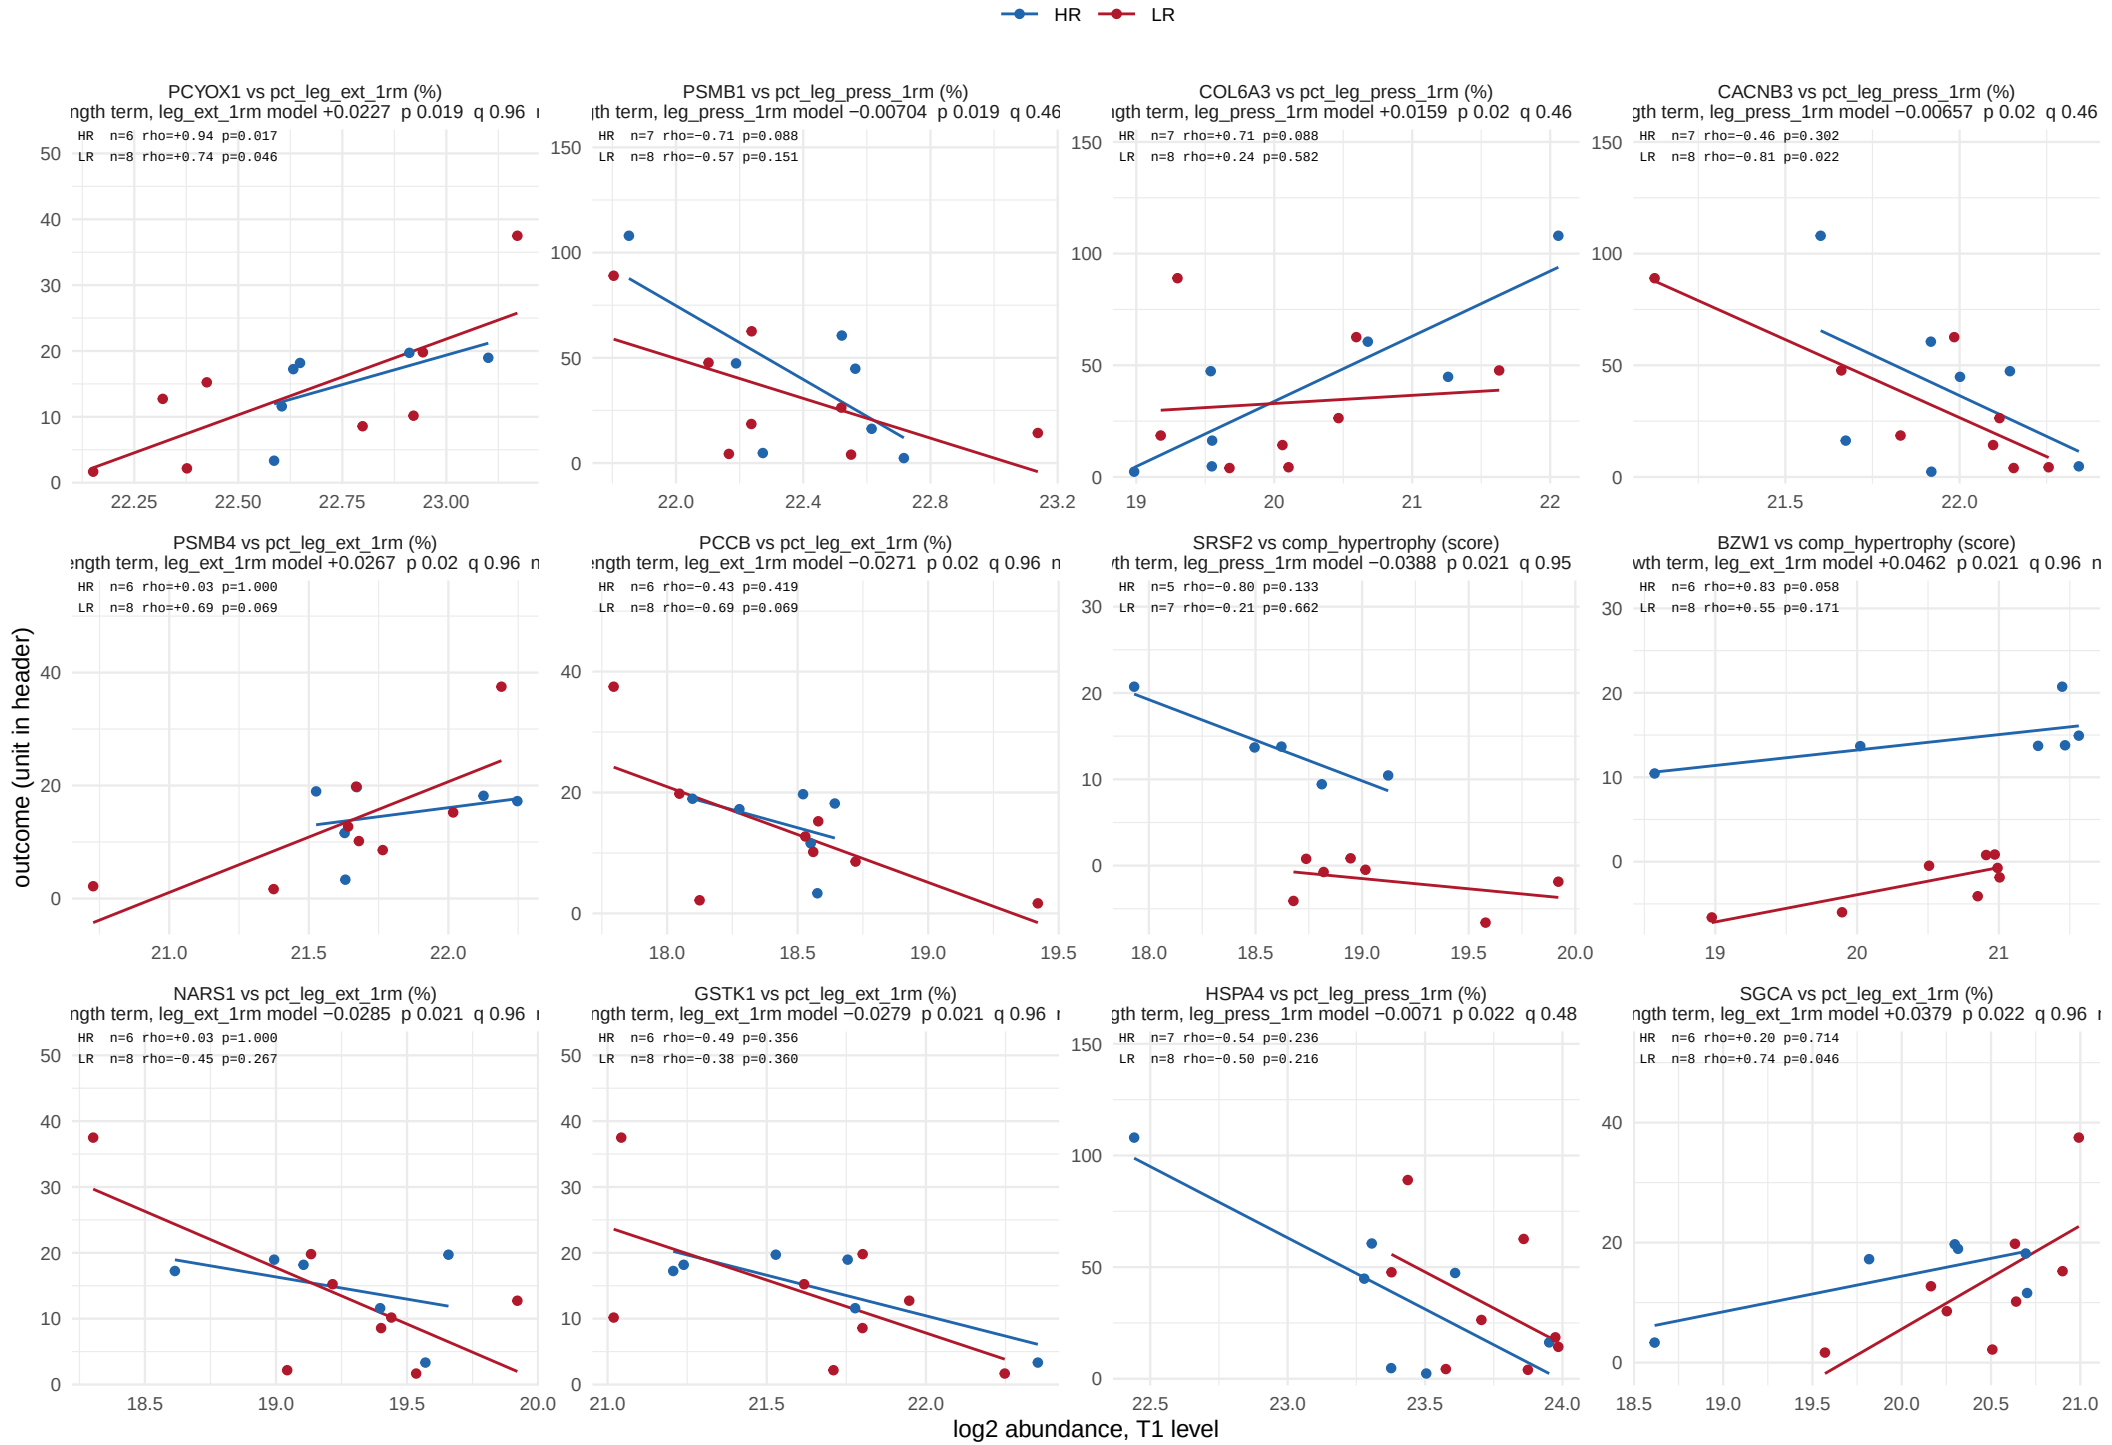

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, baseline window


357 of 6218 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 14 of 30.

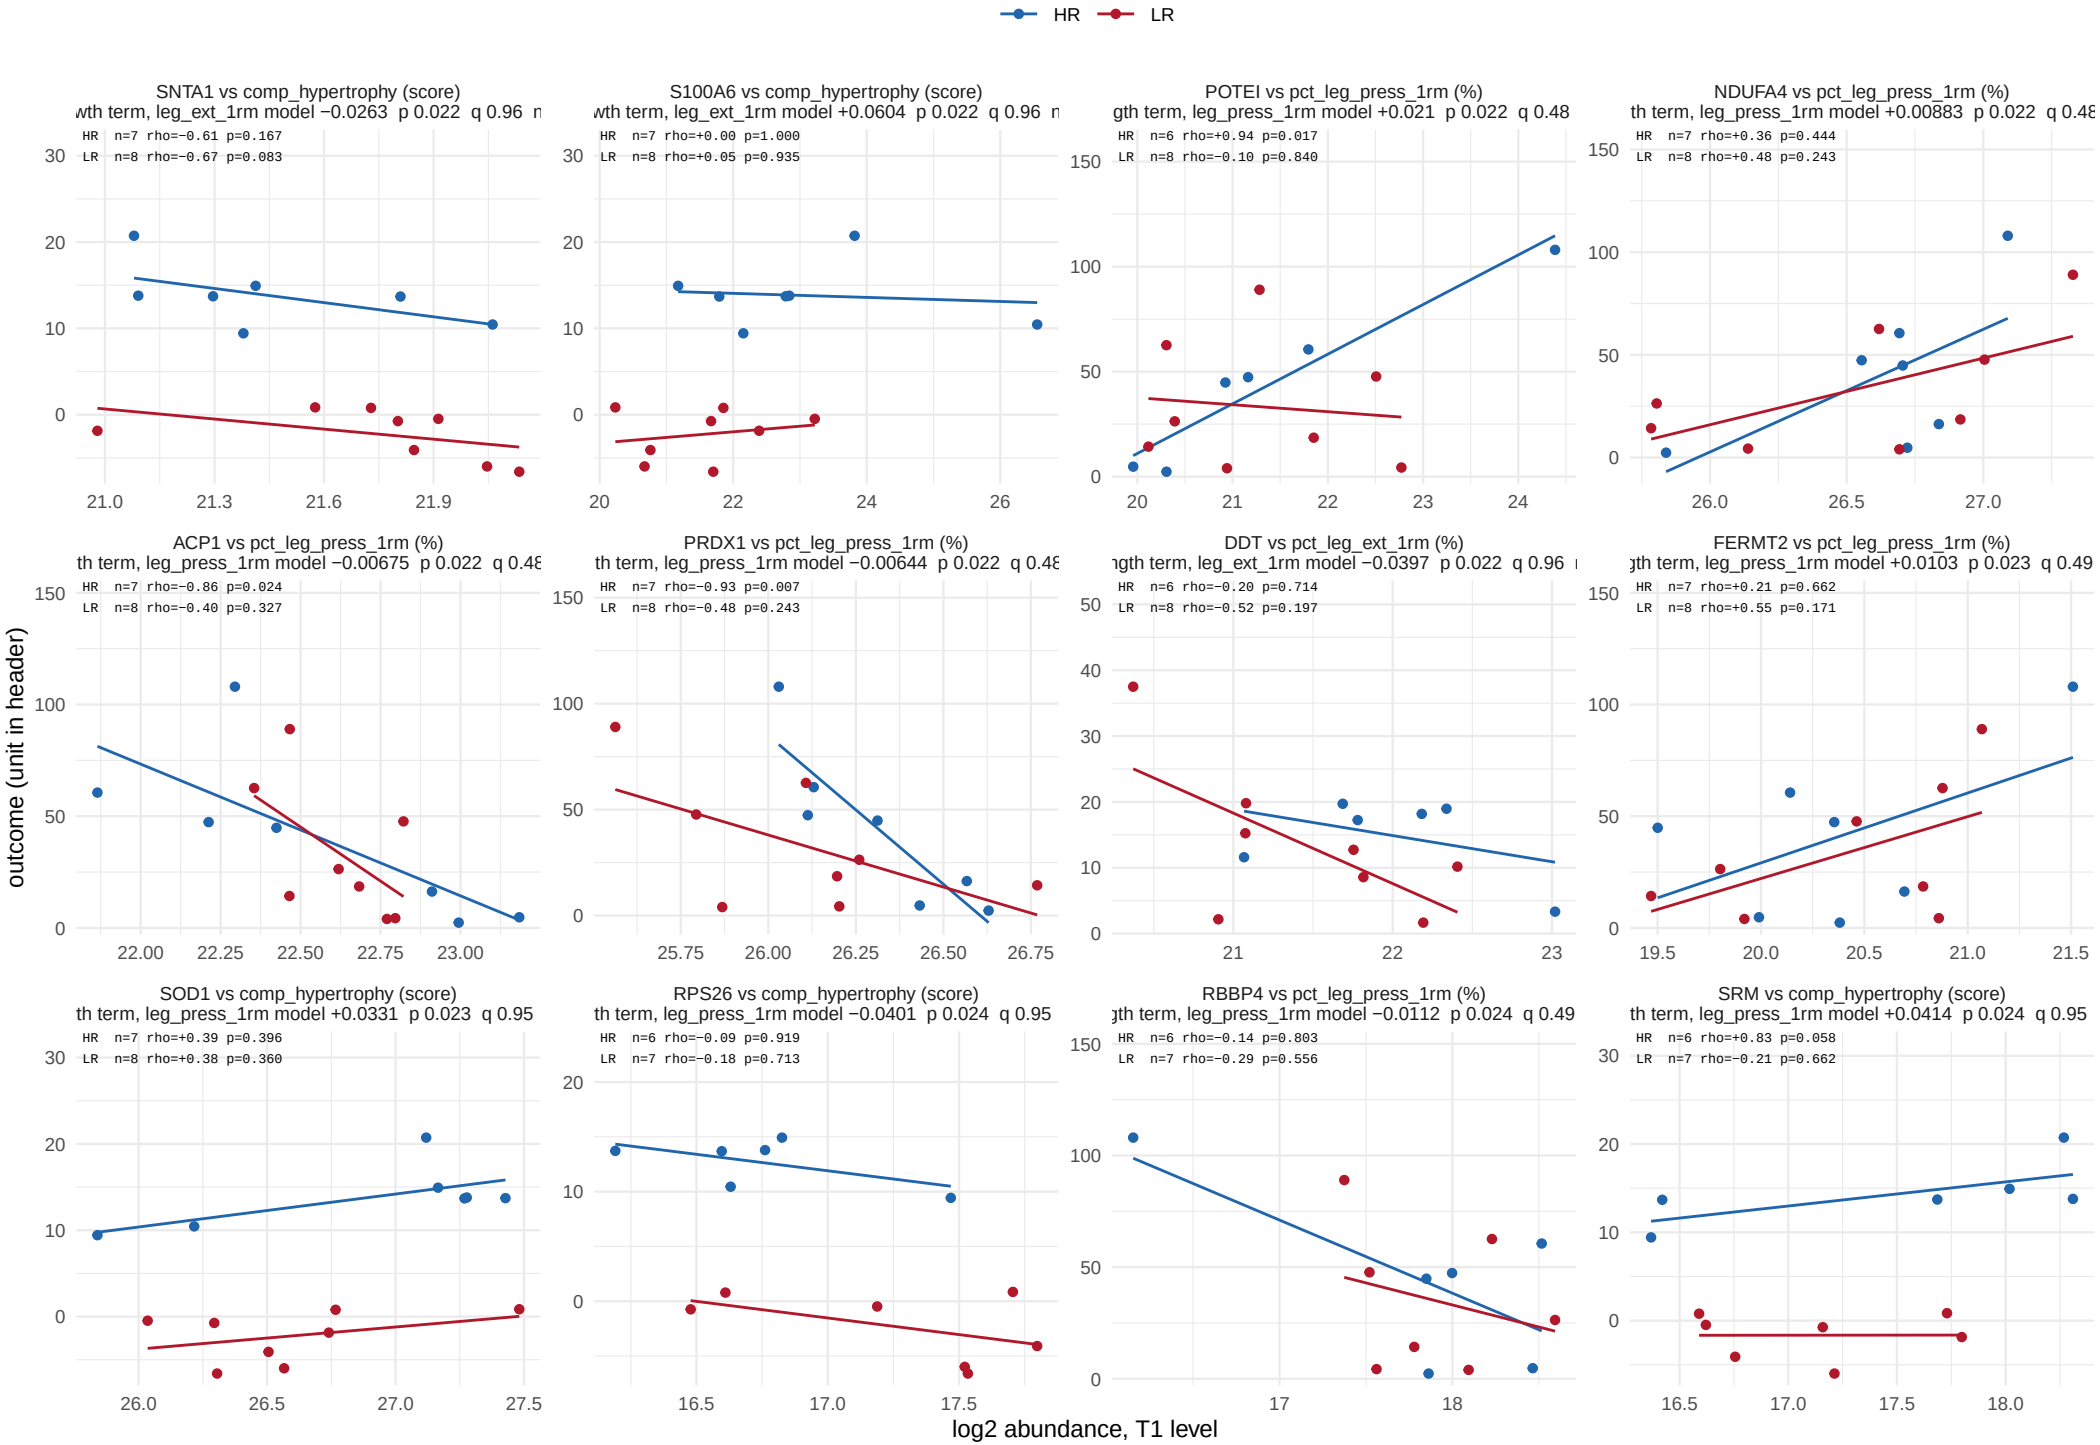

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, baseline window


357 of 6218 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 15 of 30.

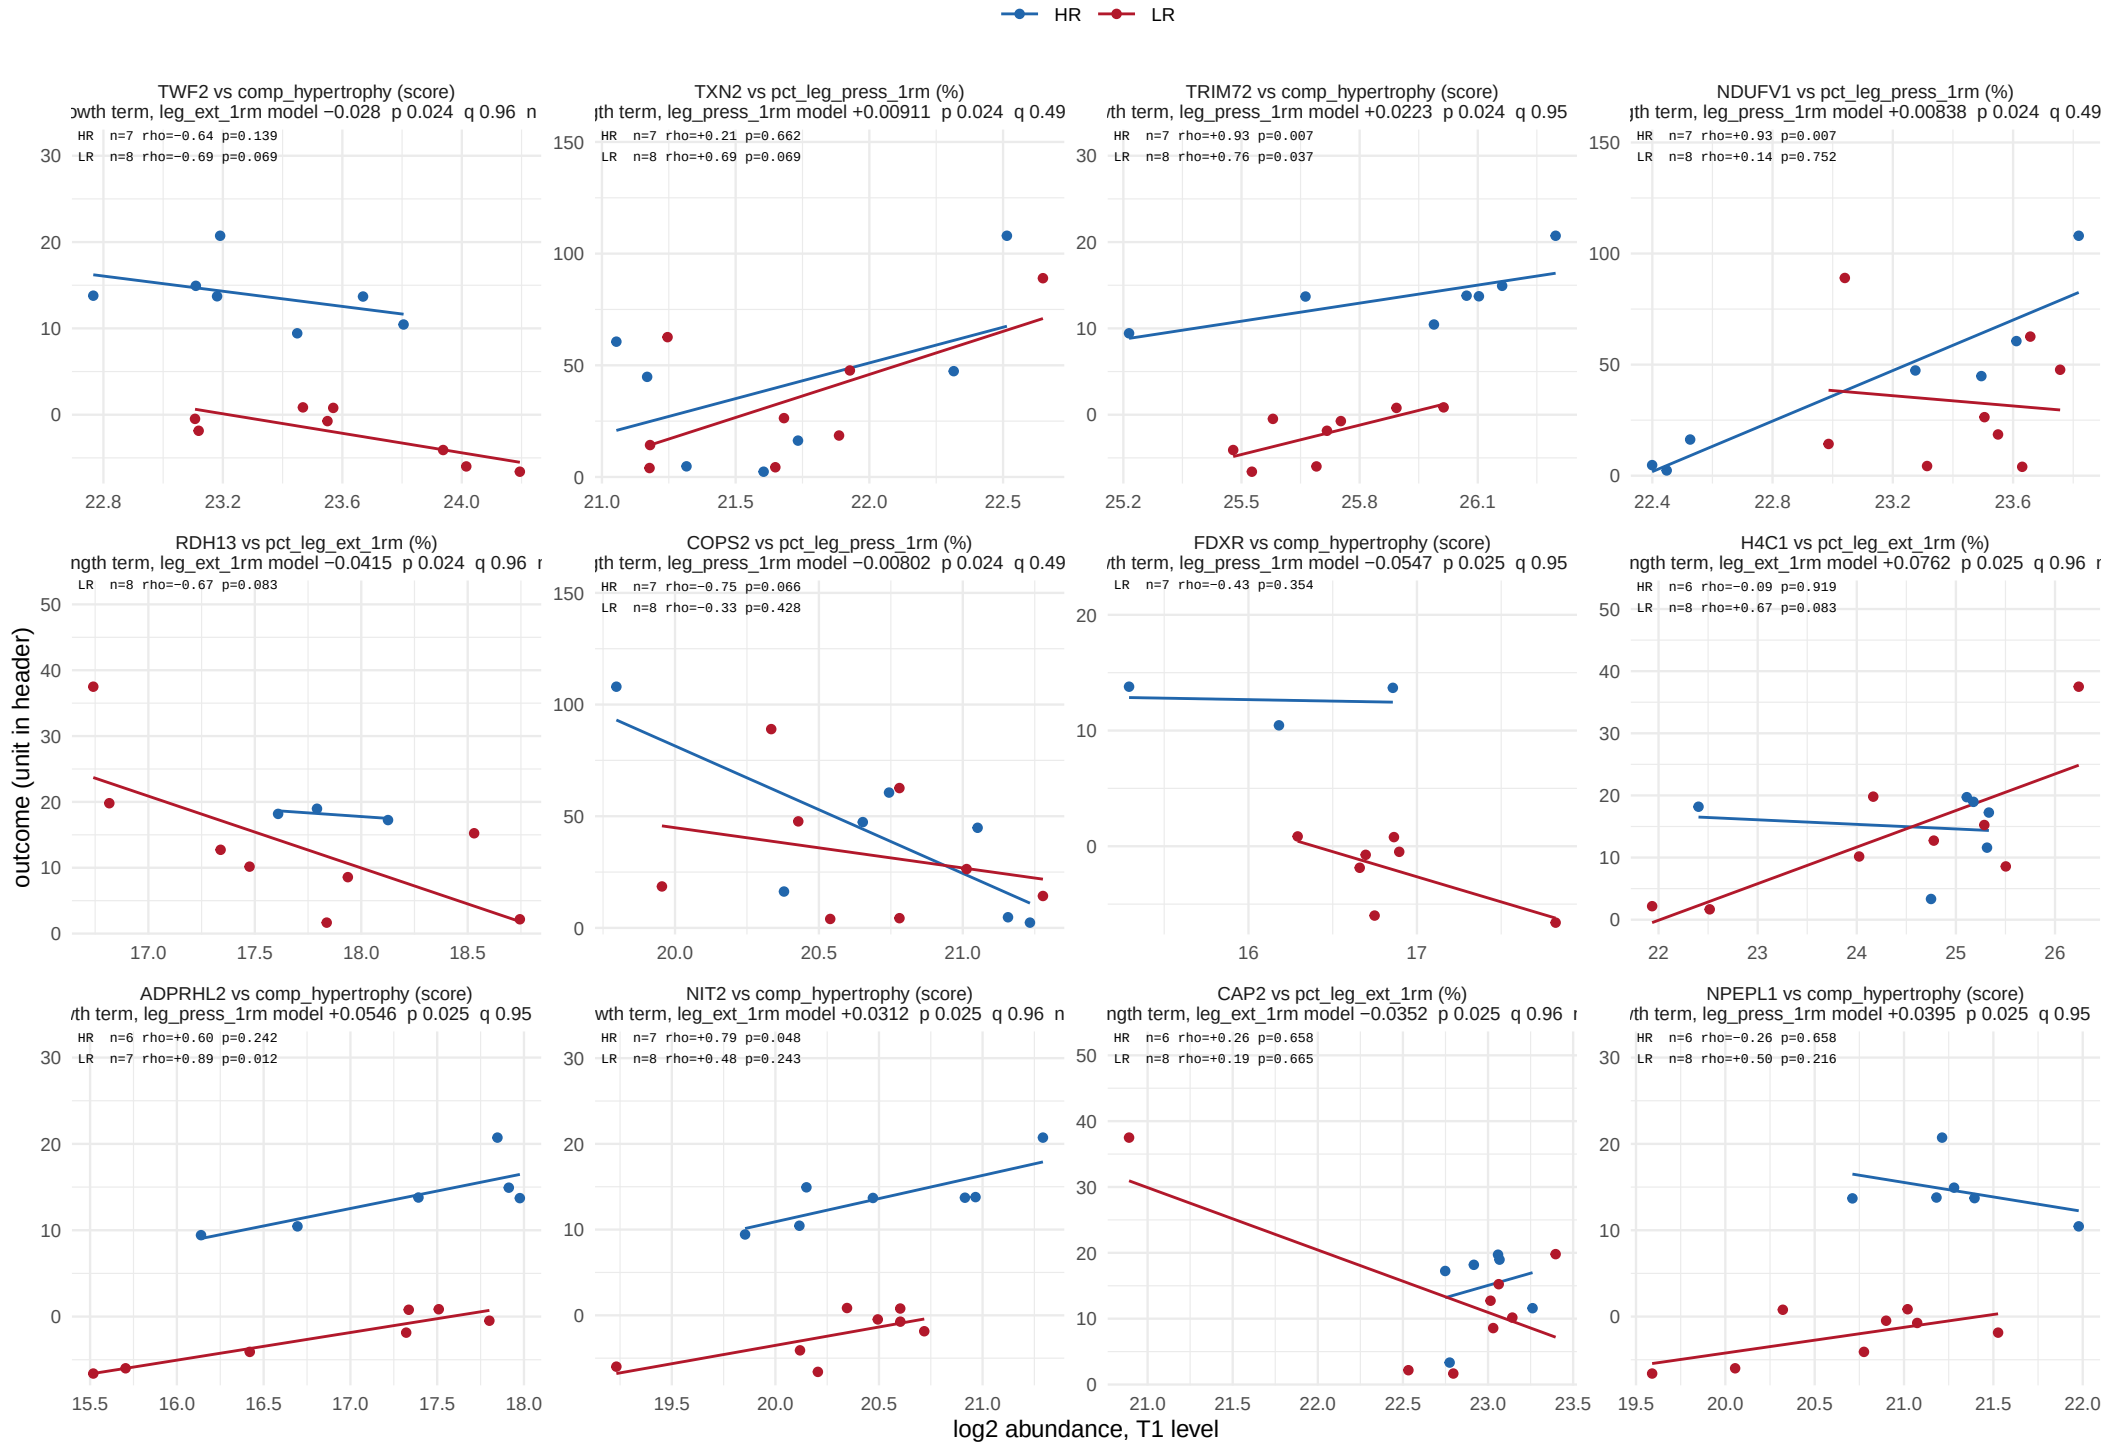

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, baseline window


357 of 6218 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 16 of 30.

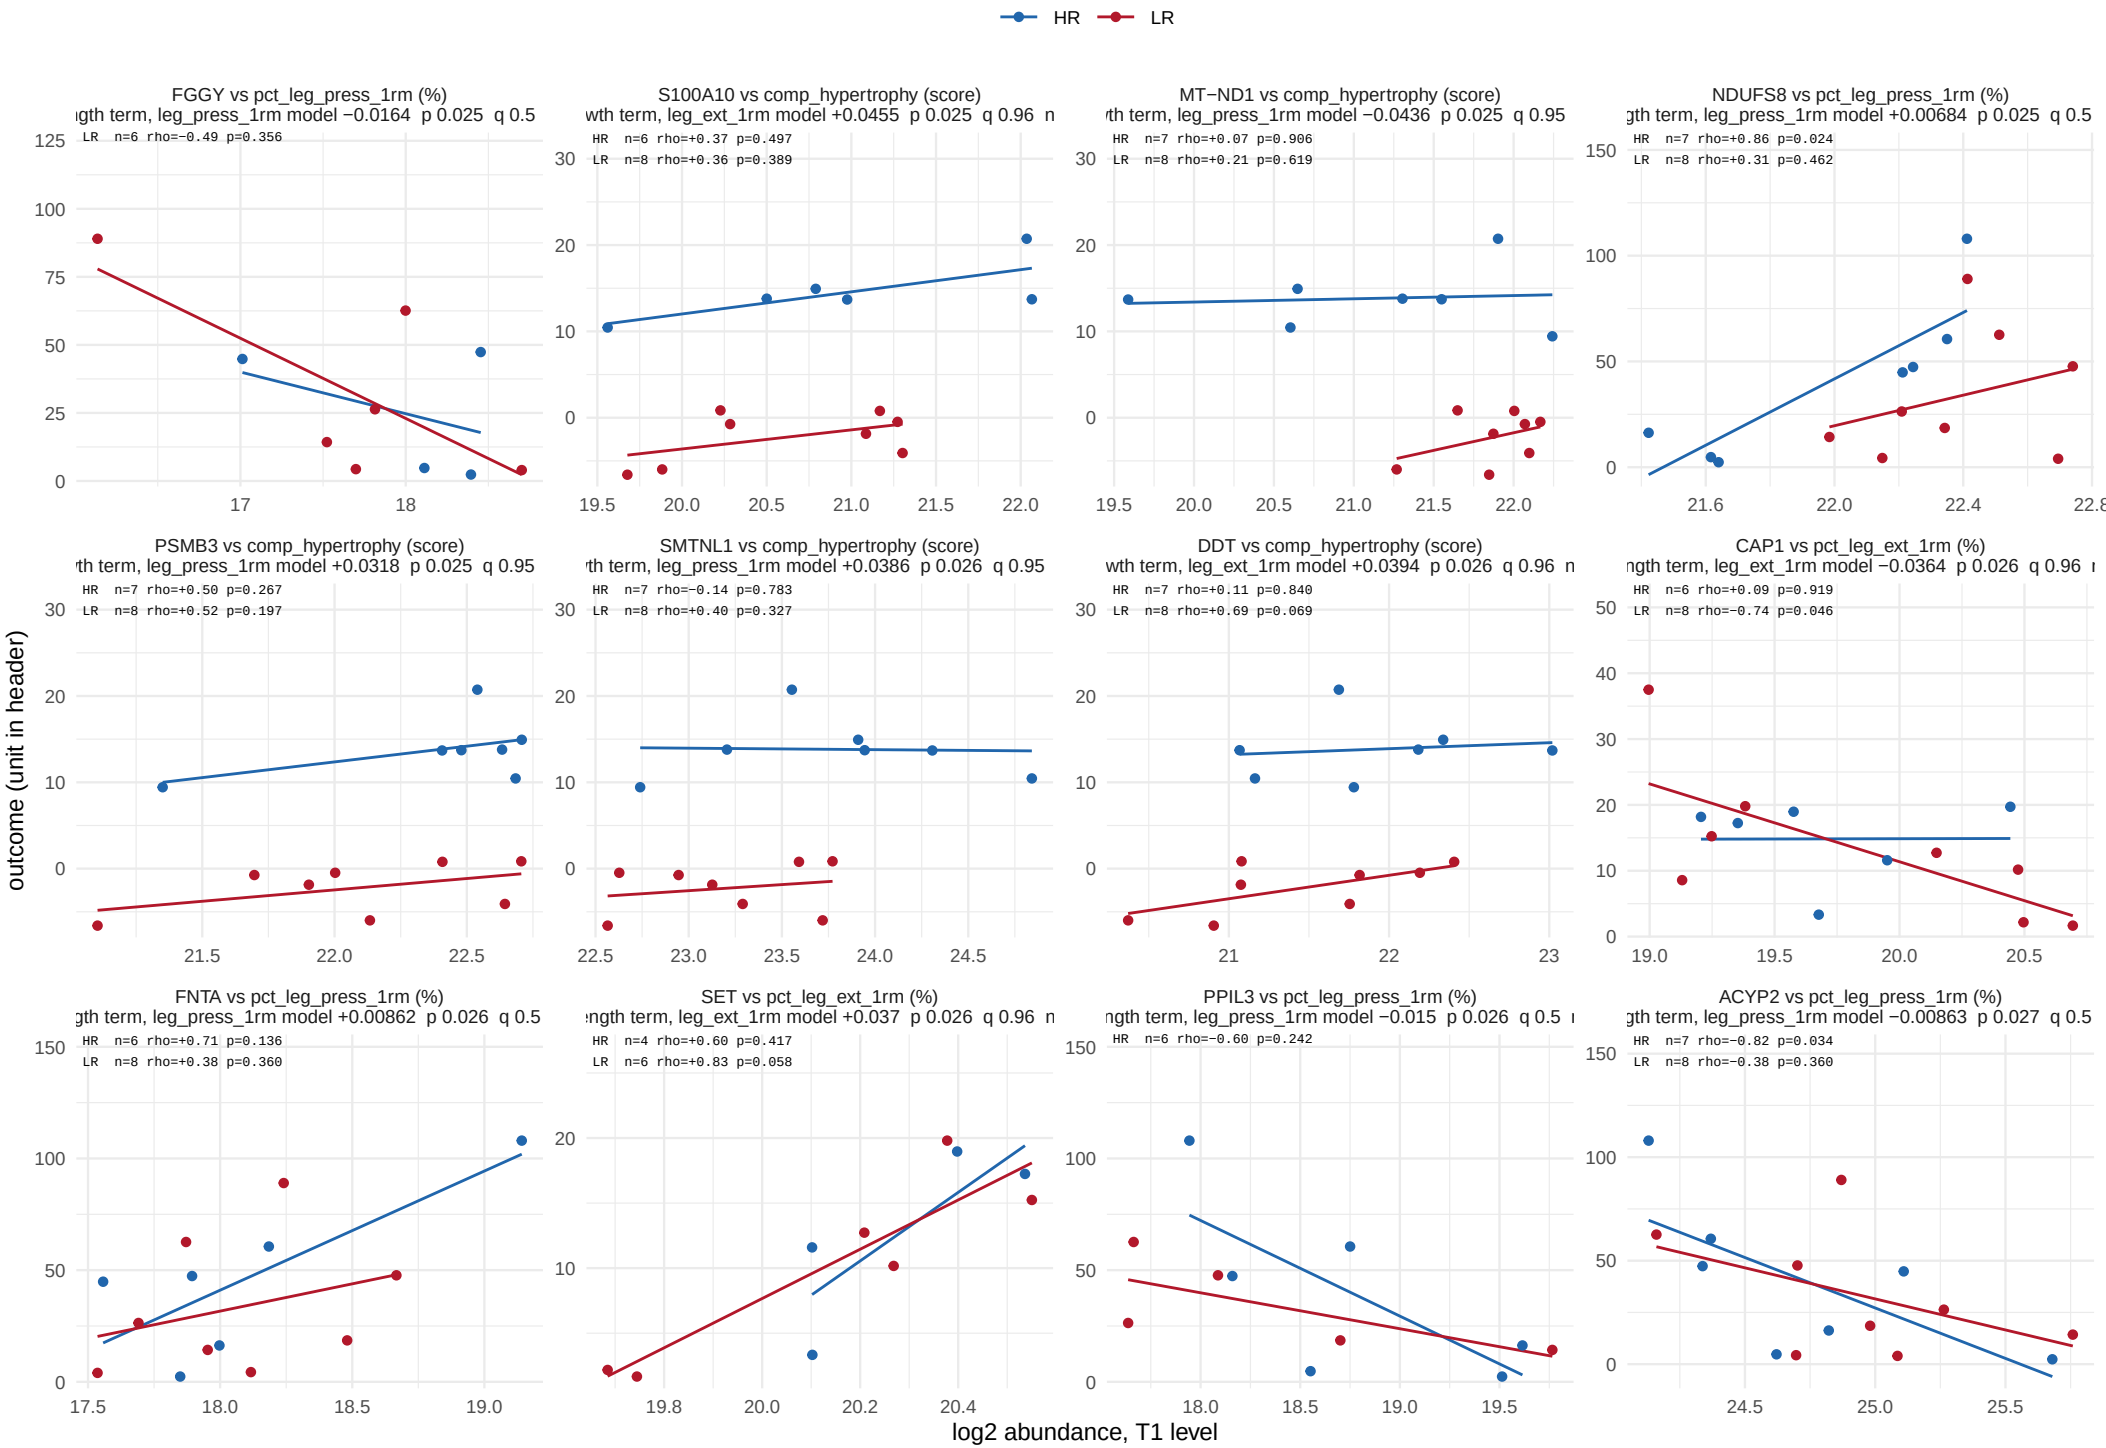

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, baseline window


357 of 6218 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 17 of 30.

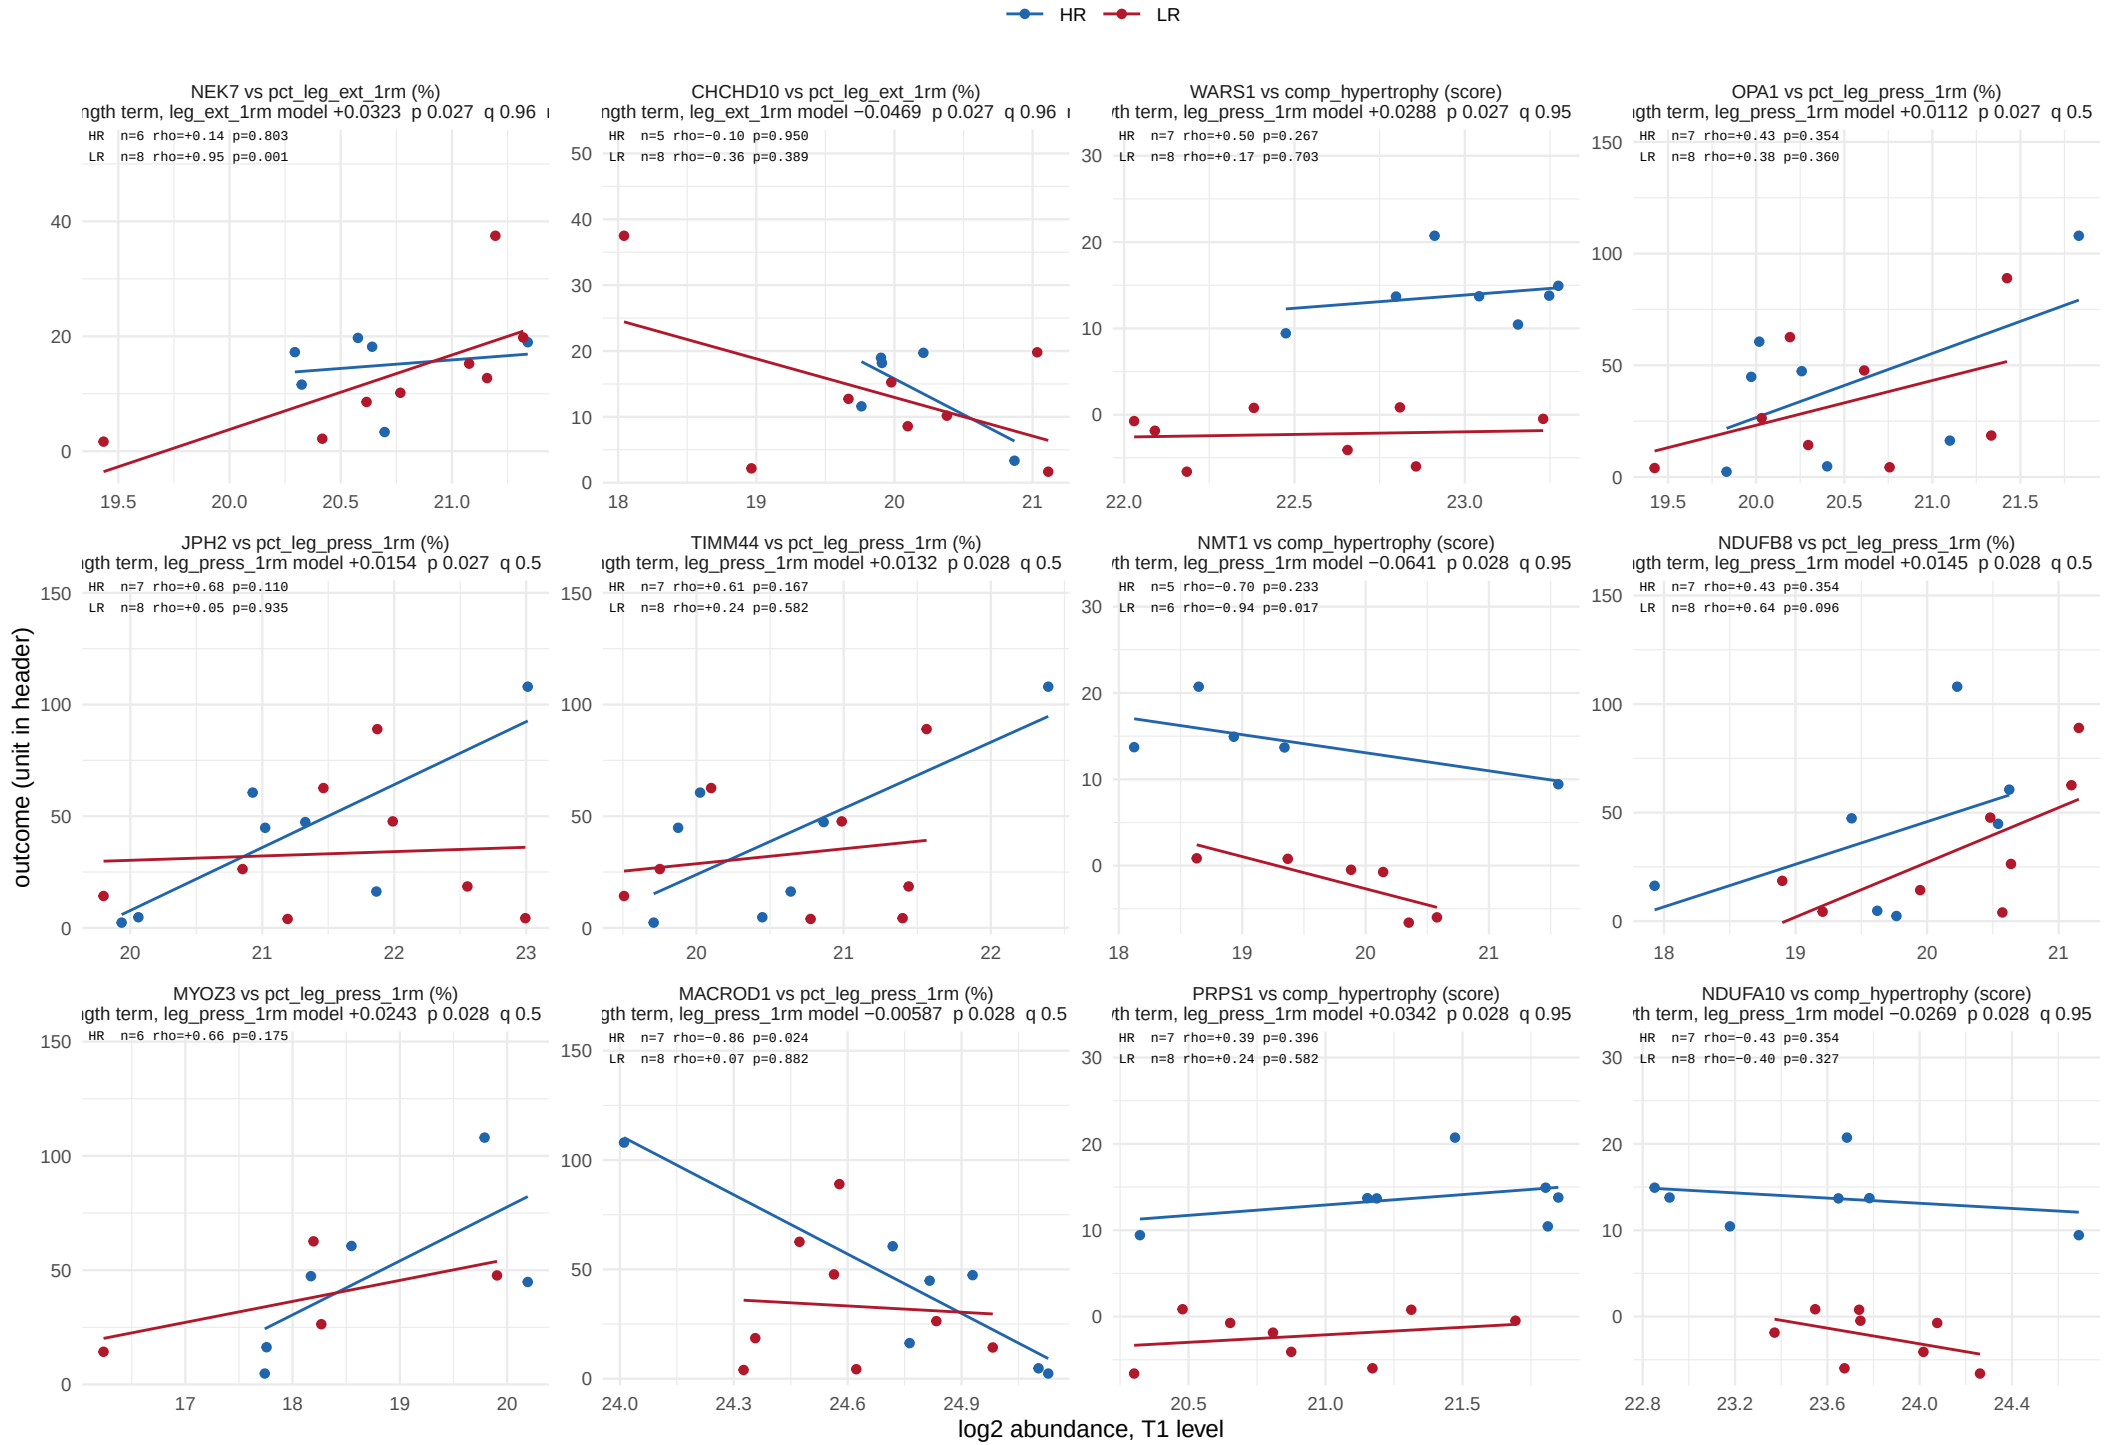

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, baseline window


357 of 6218 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 18 of 30.

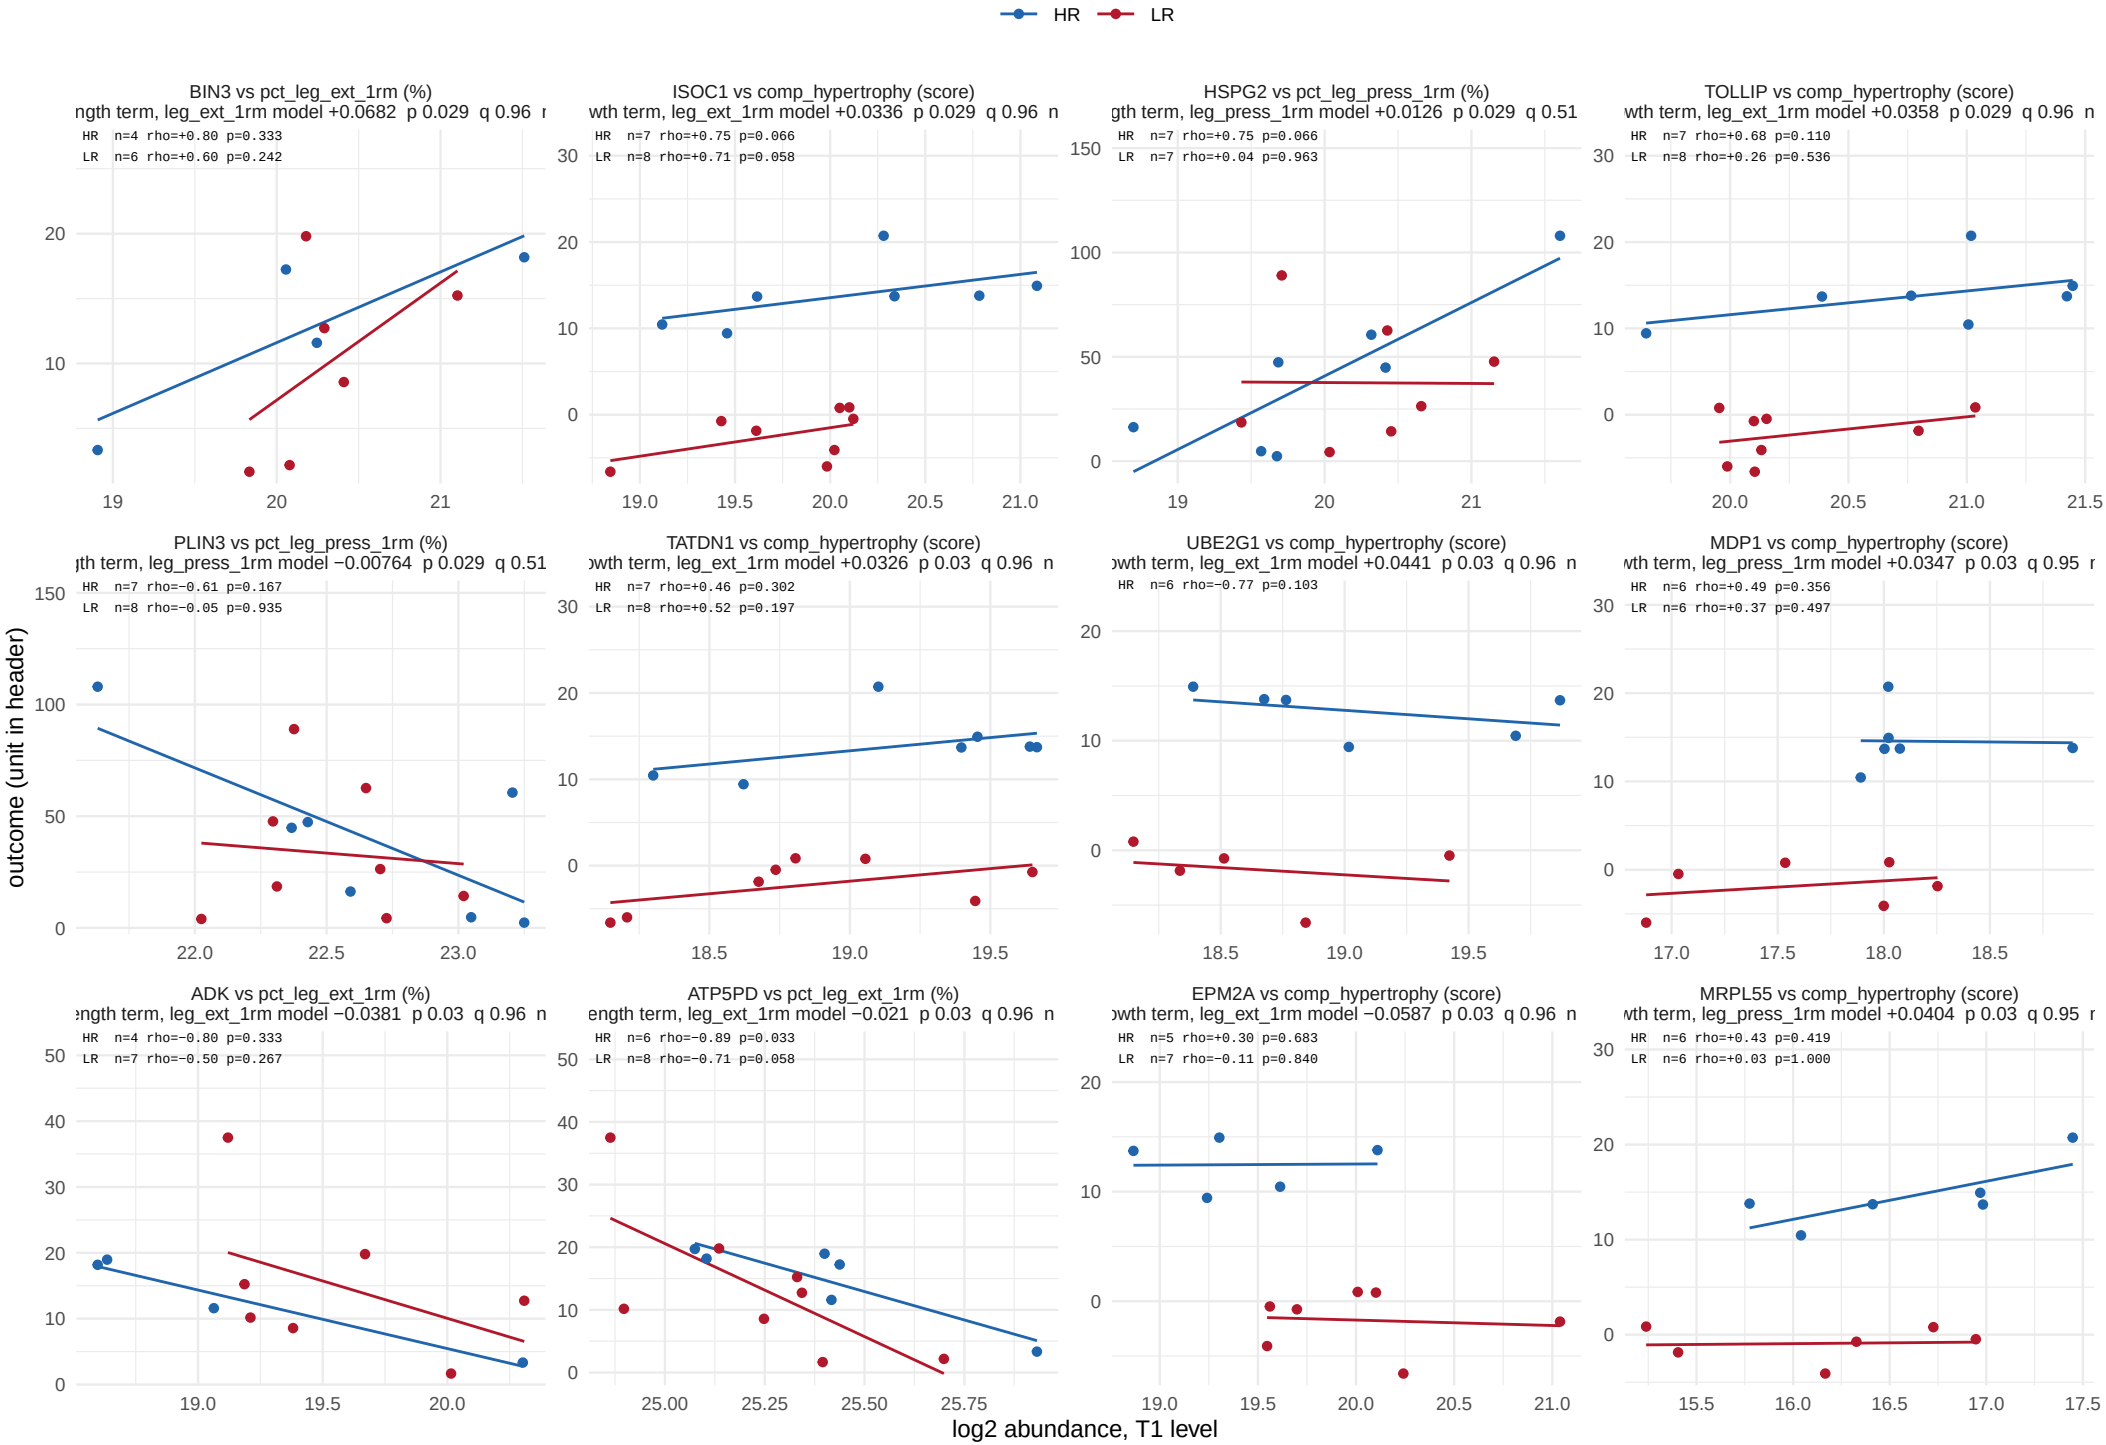

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, baseline window


357 of 6218 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 19 of 30.

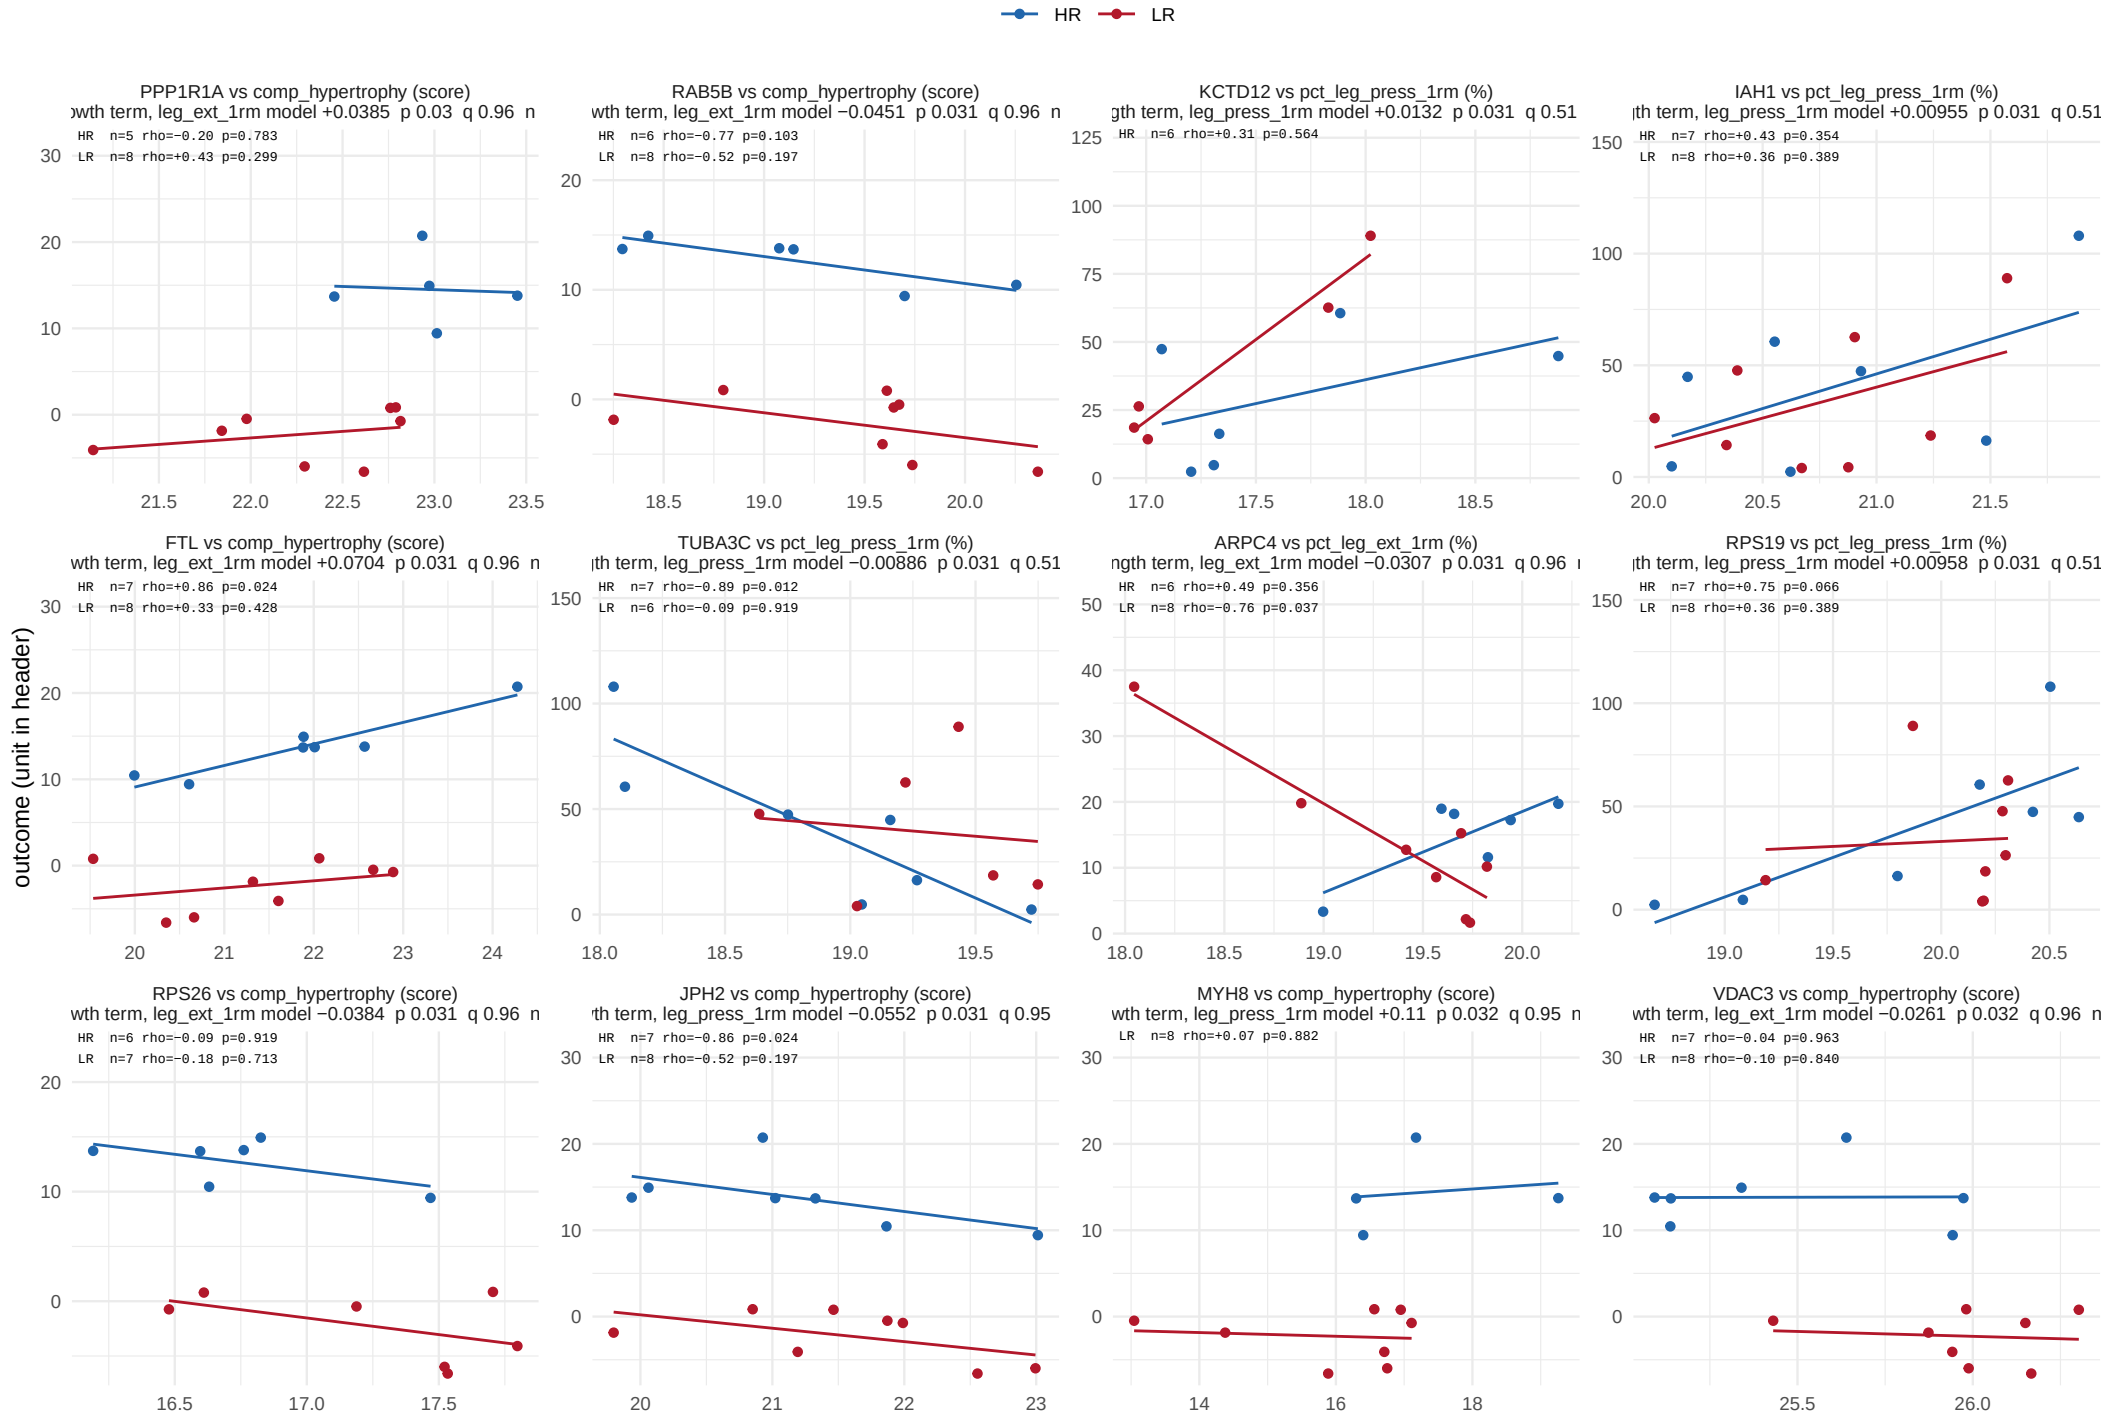

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, baseline window


357 of 6218 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 20 of 30.

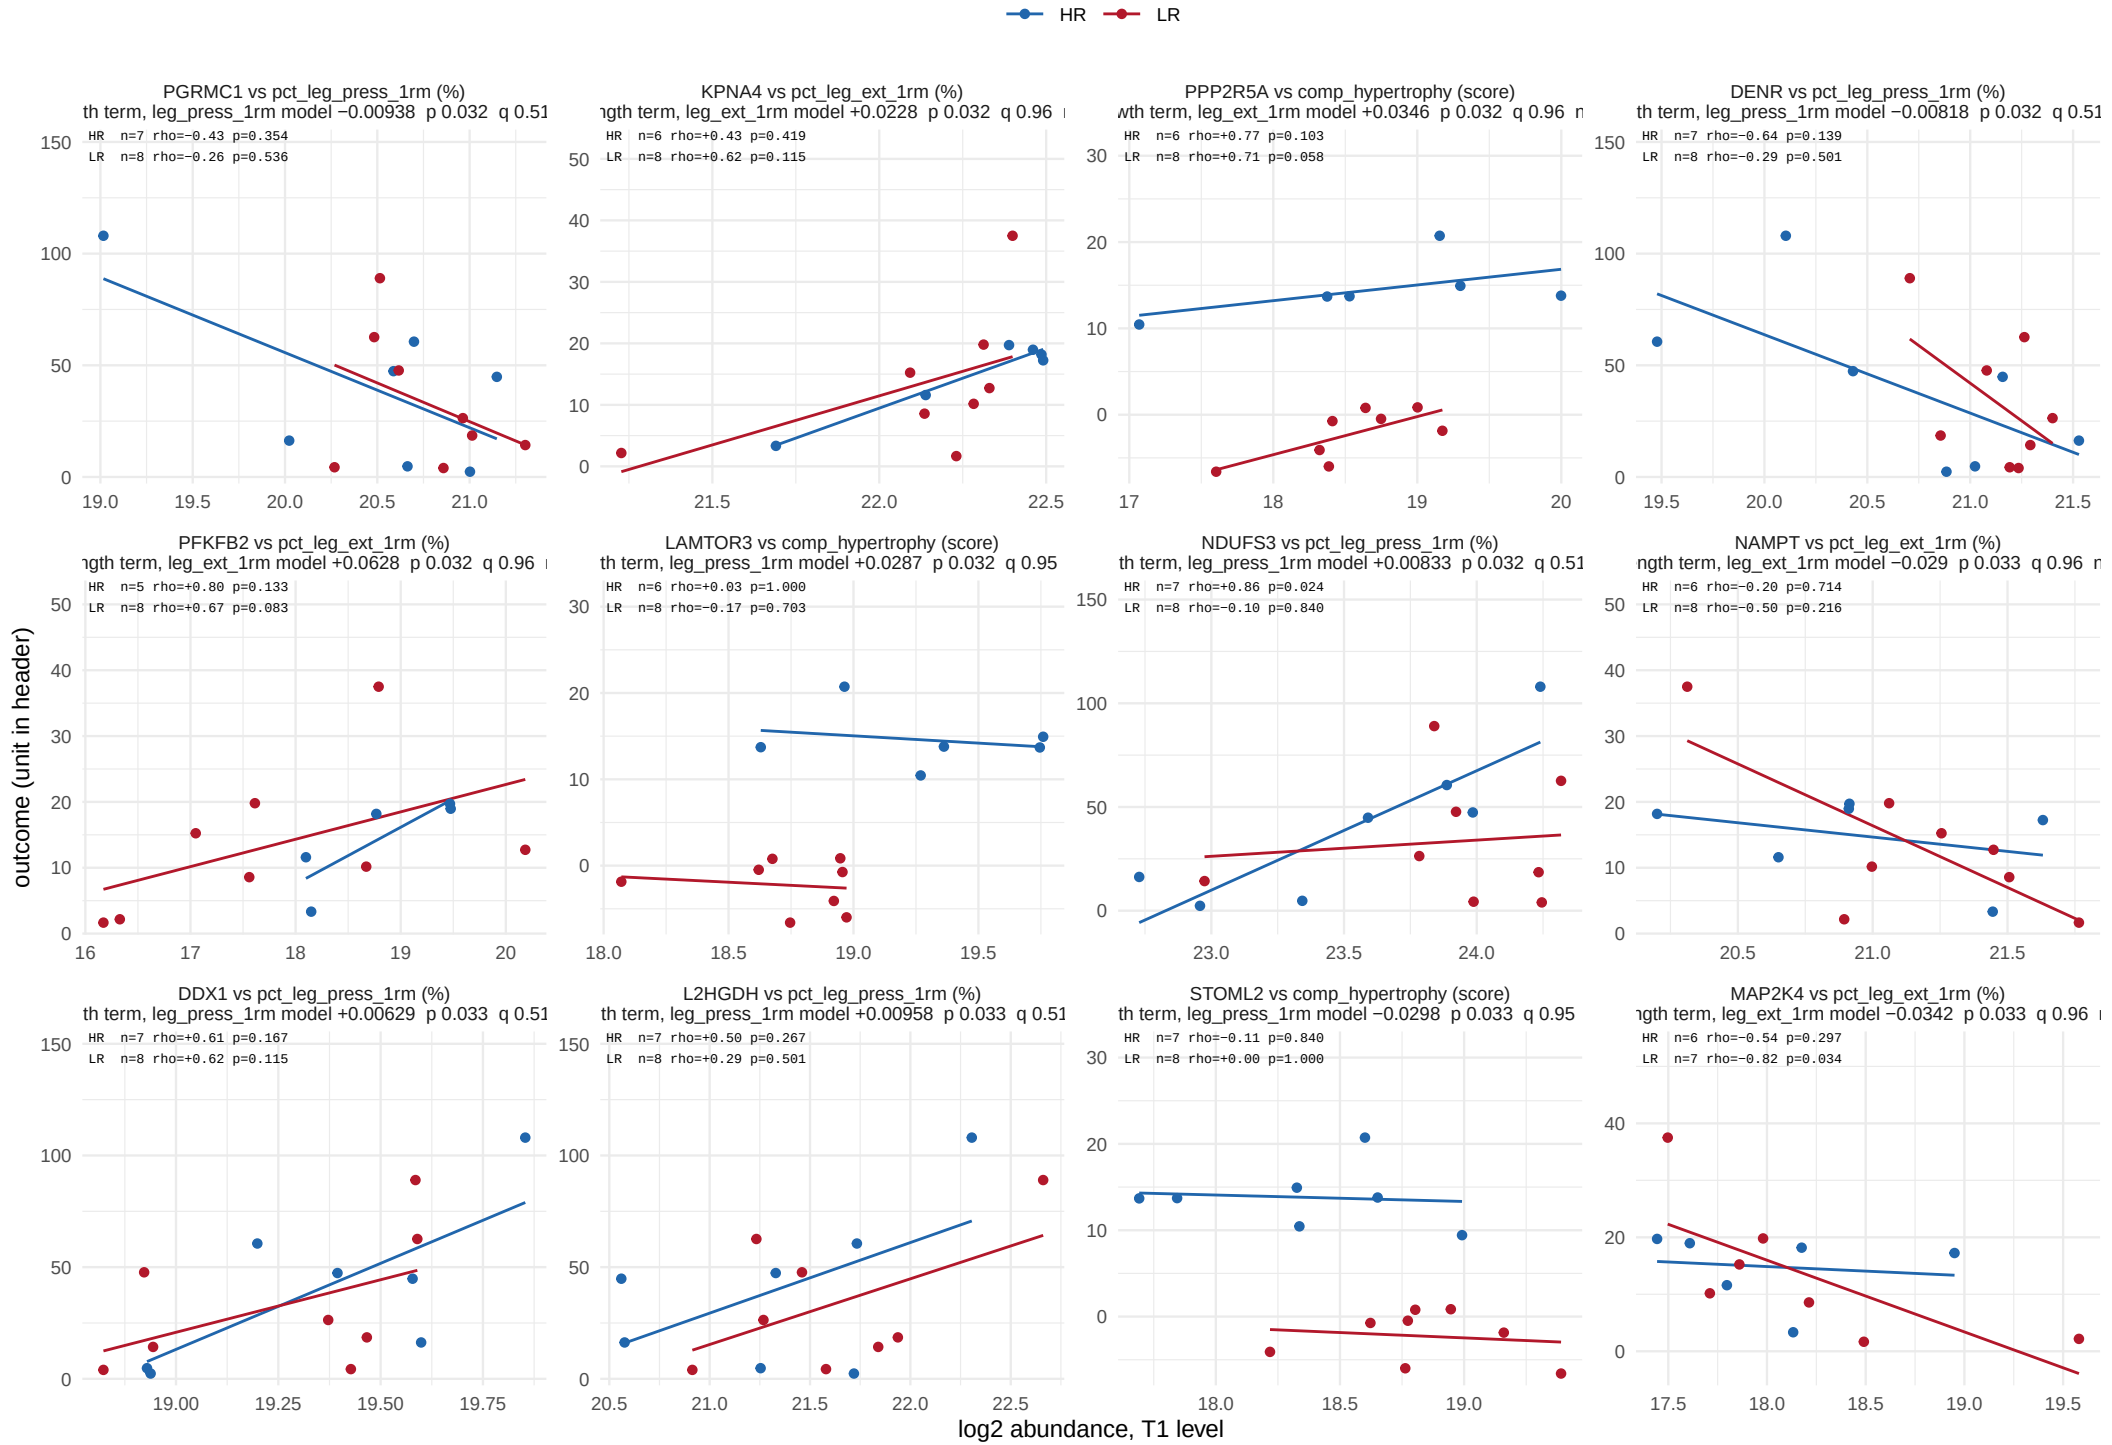

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, baseline window


357 of 6218 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 21 of 30.

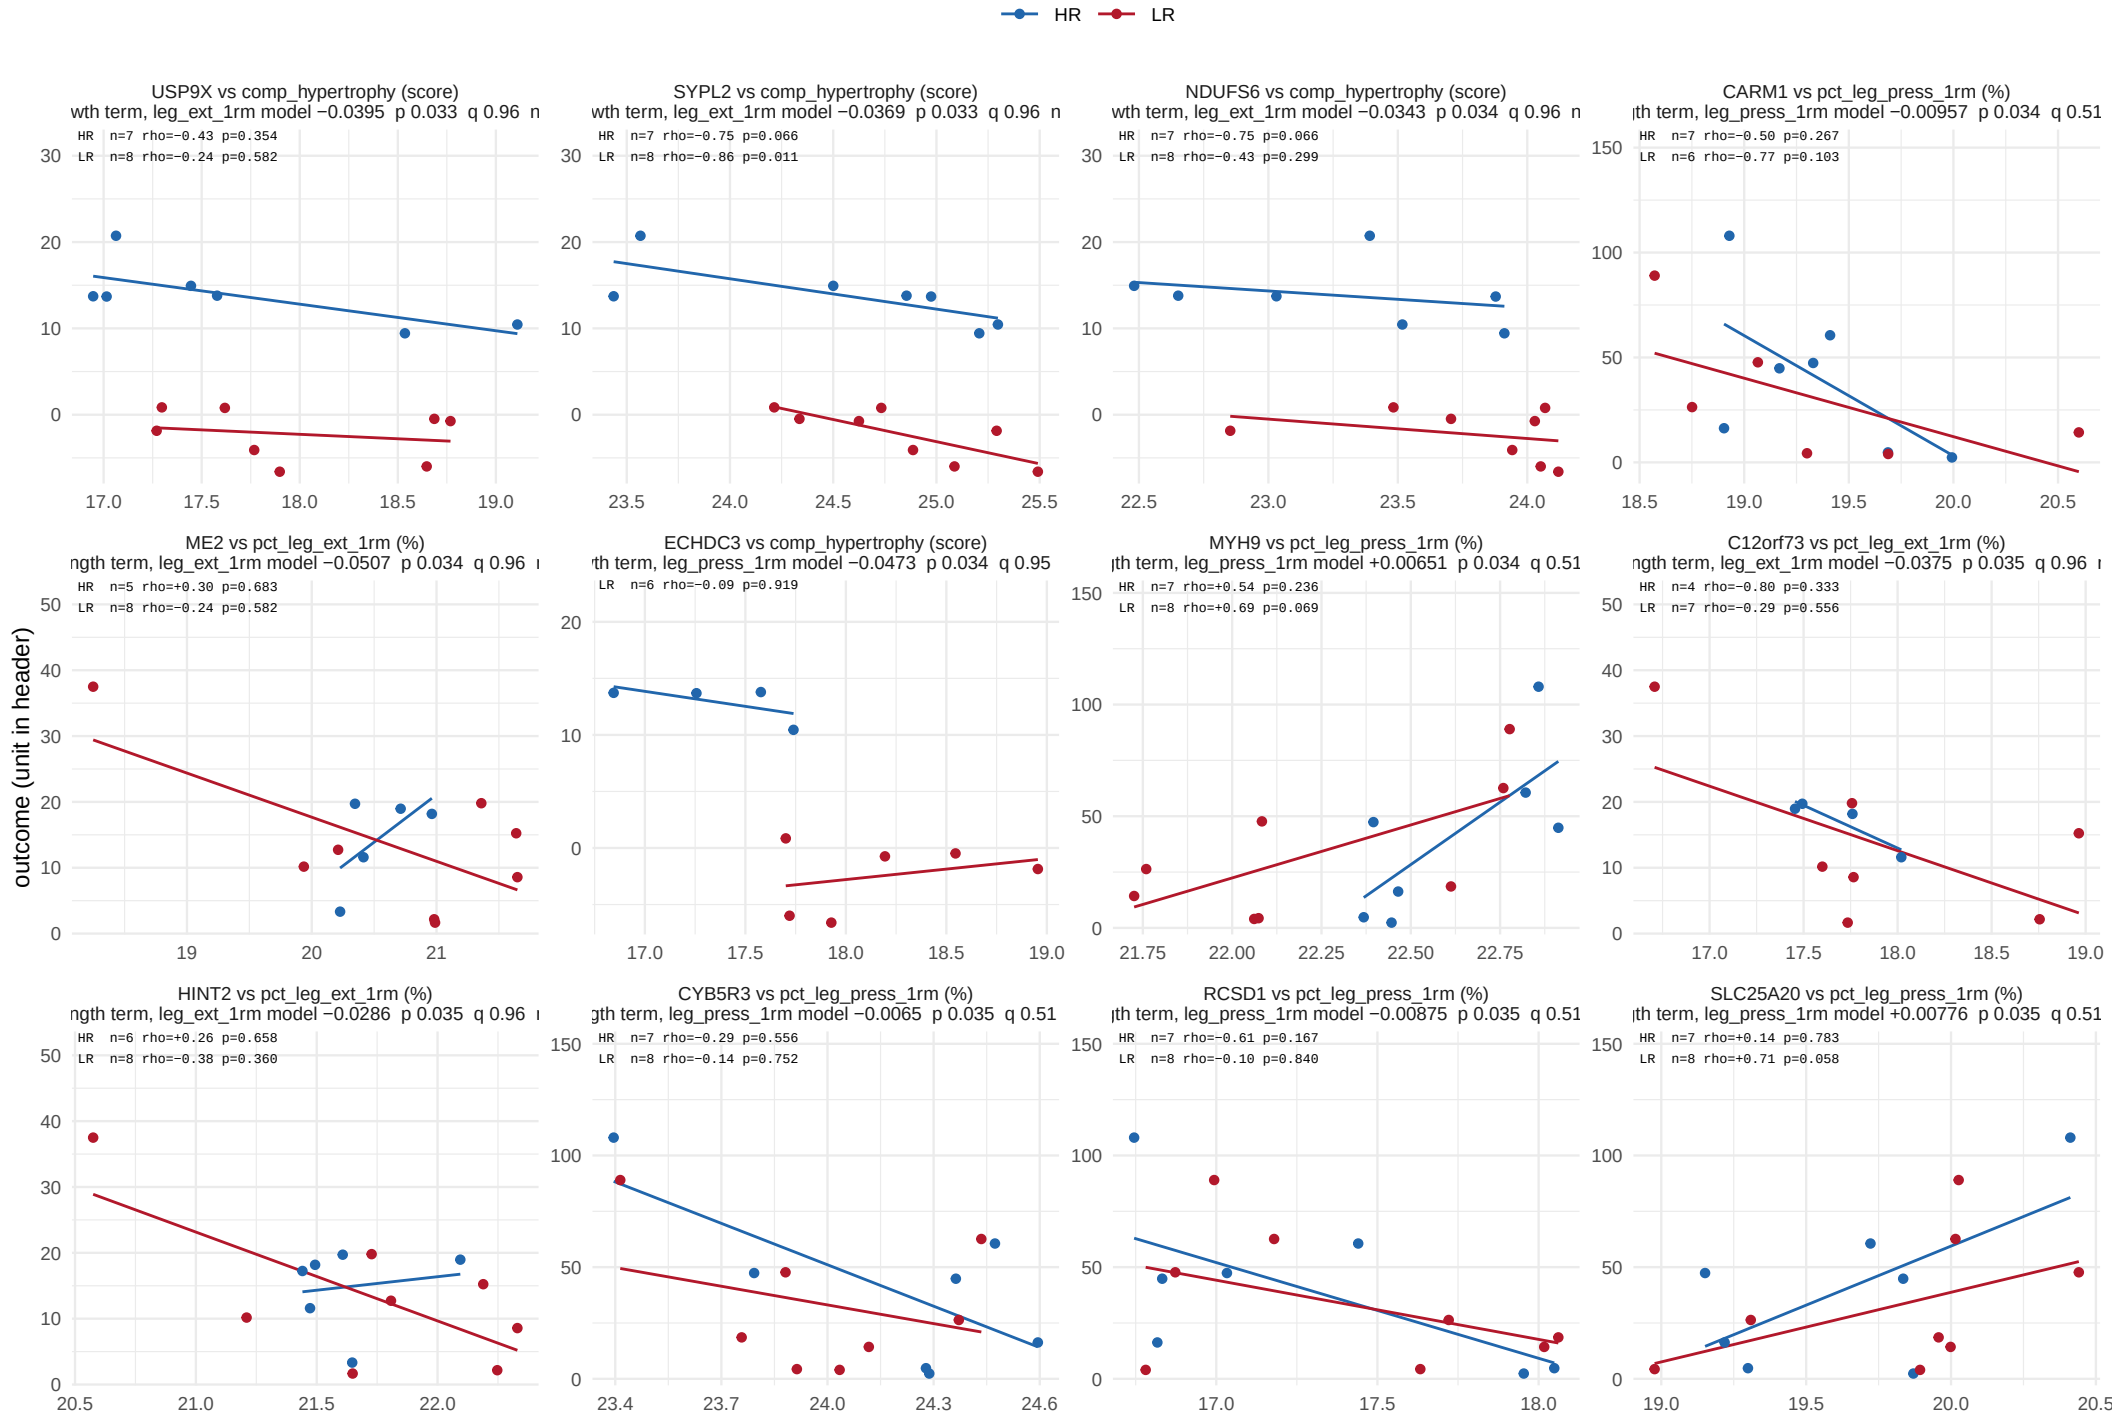

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, baseline window


357 of 6218 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 22 of 30.

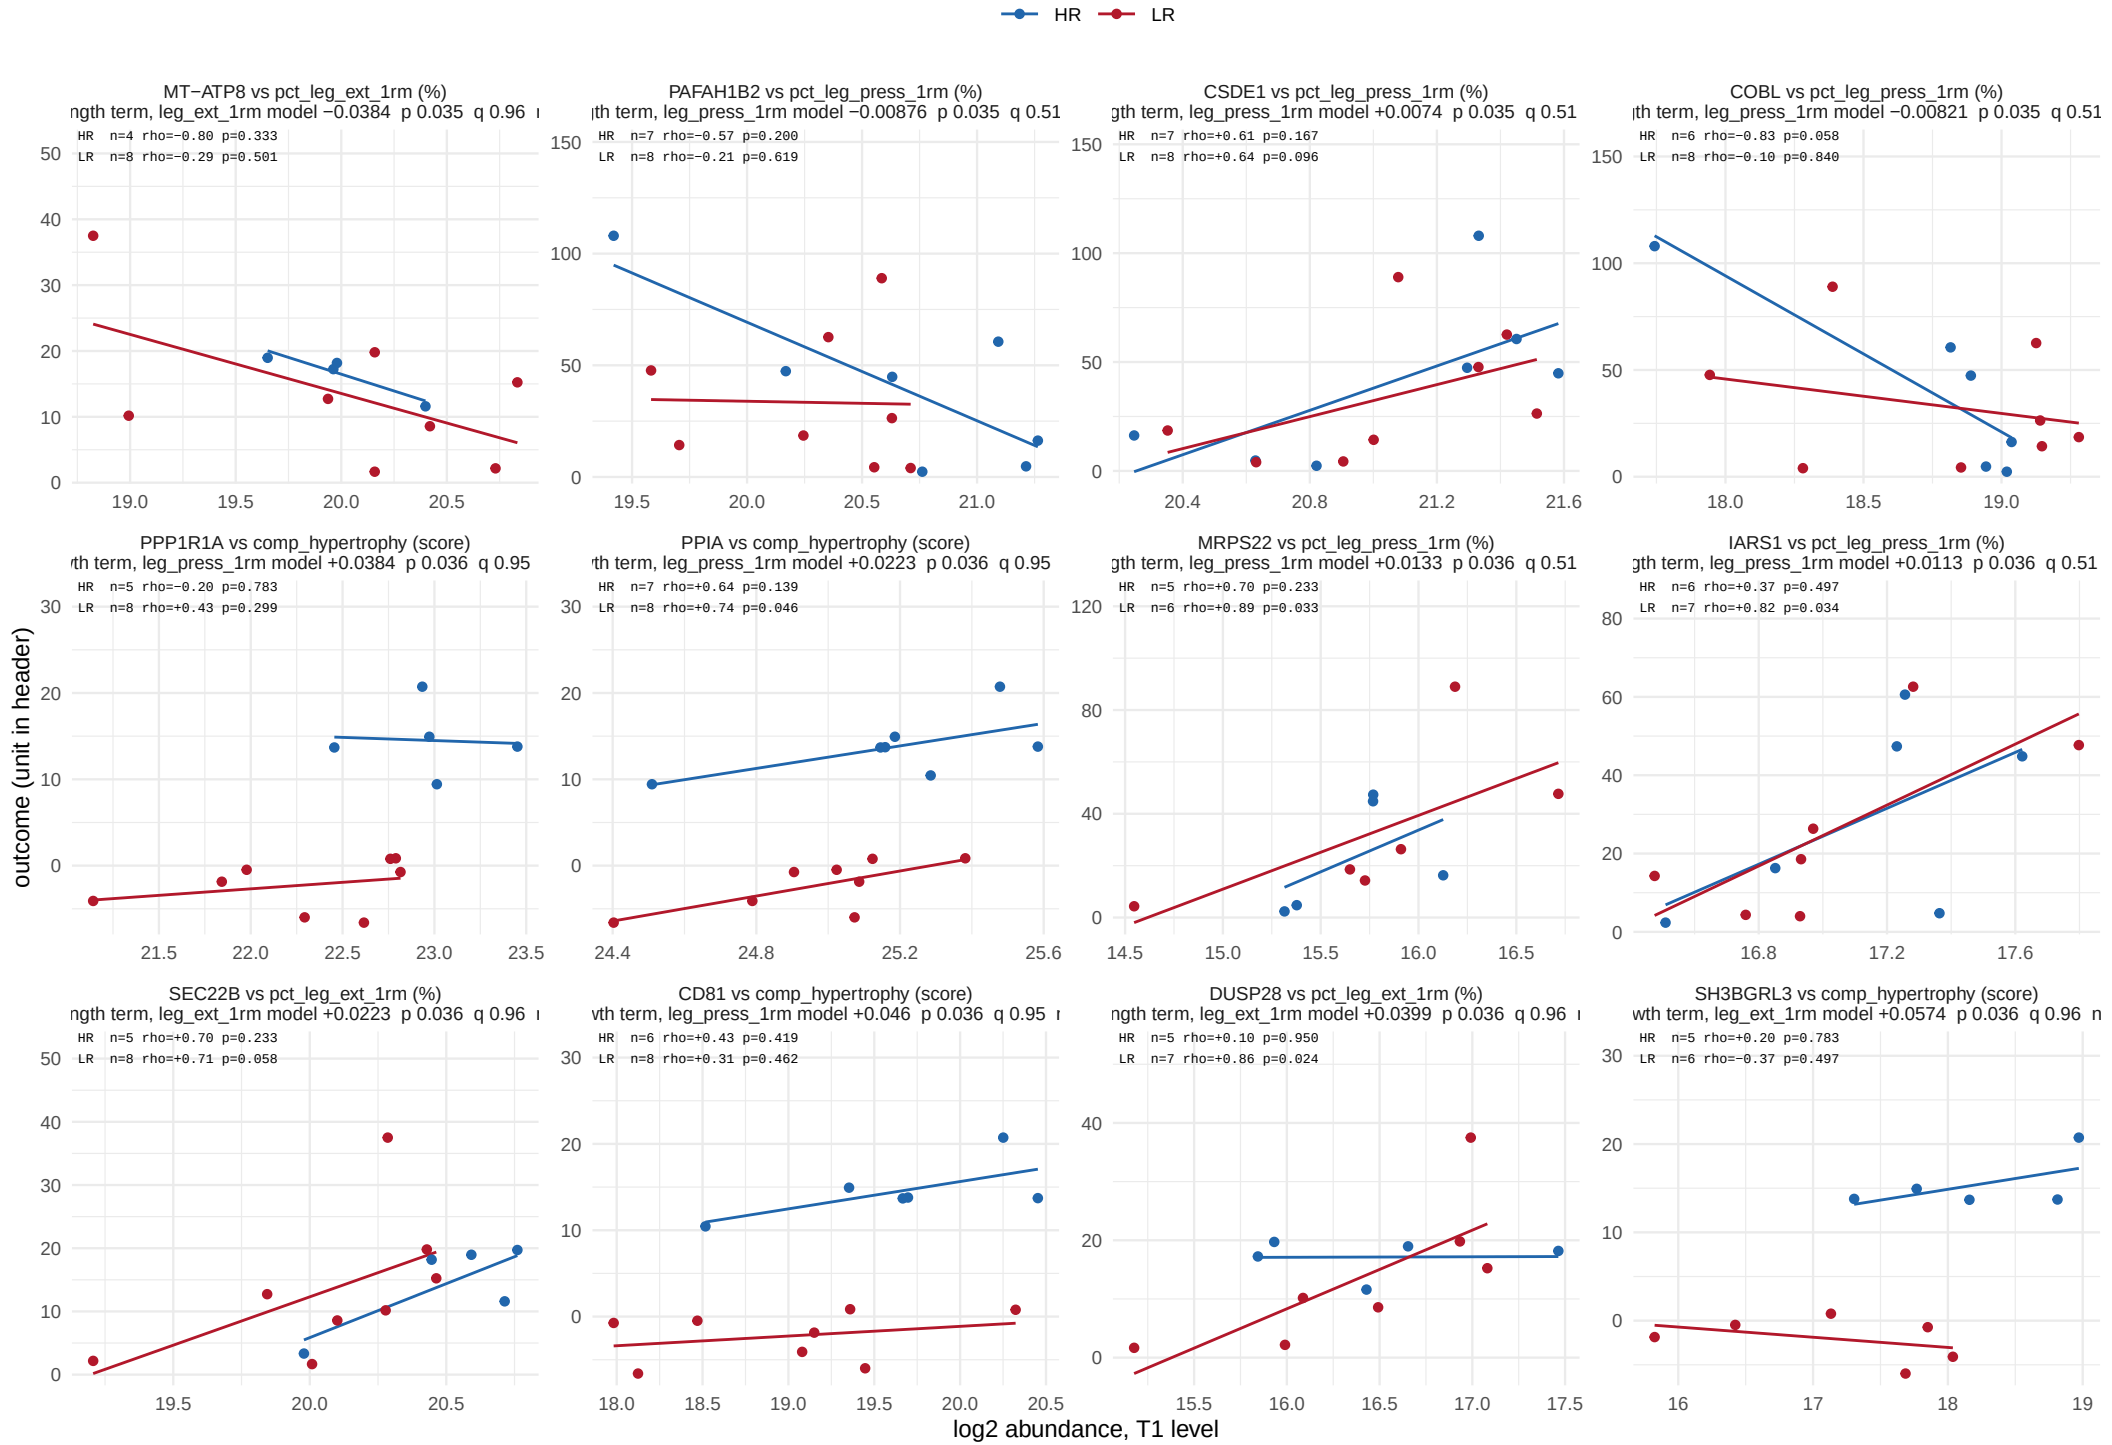

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, baseline window


357 of 6218 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 23 of 30.

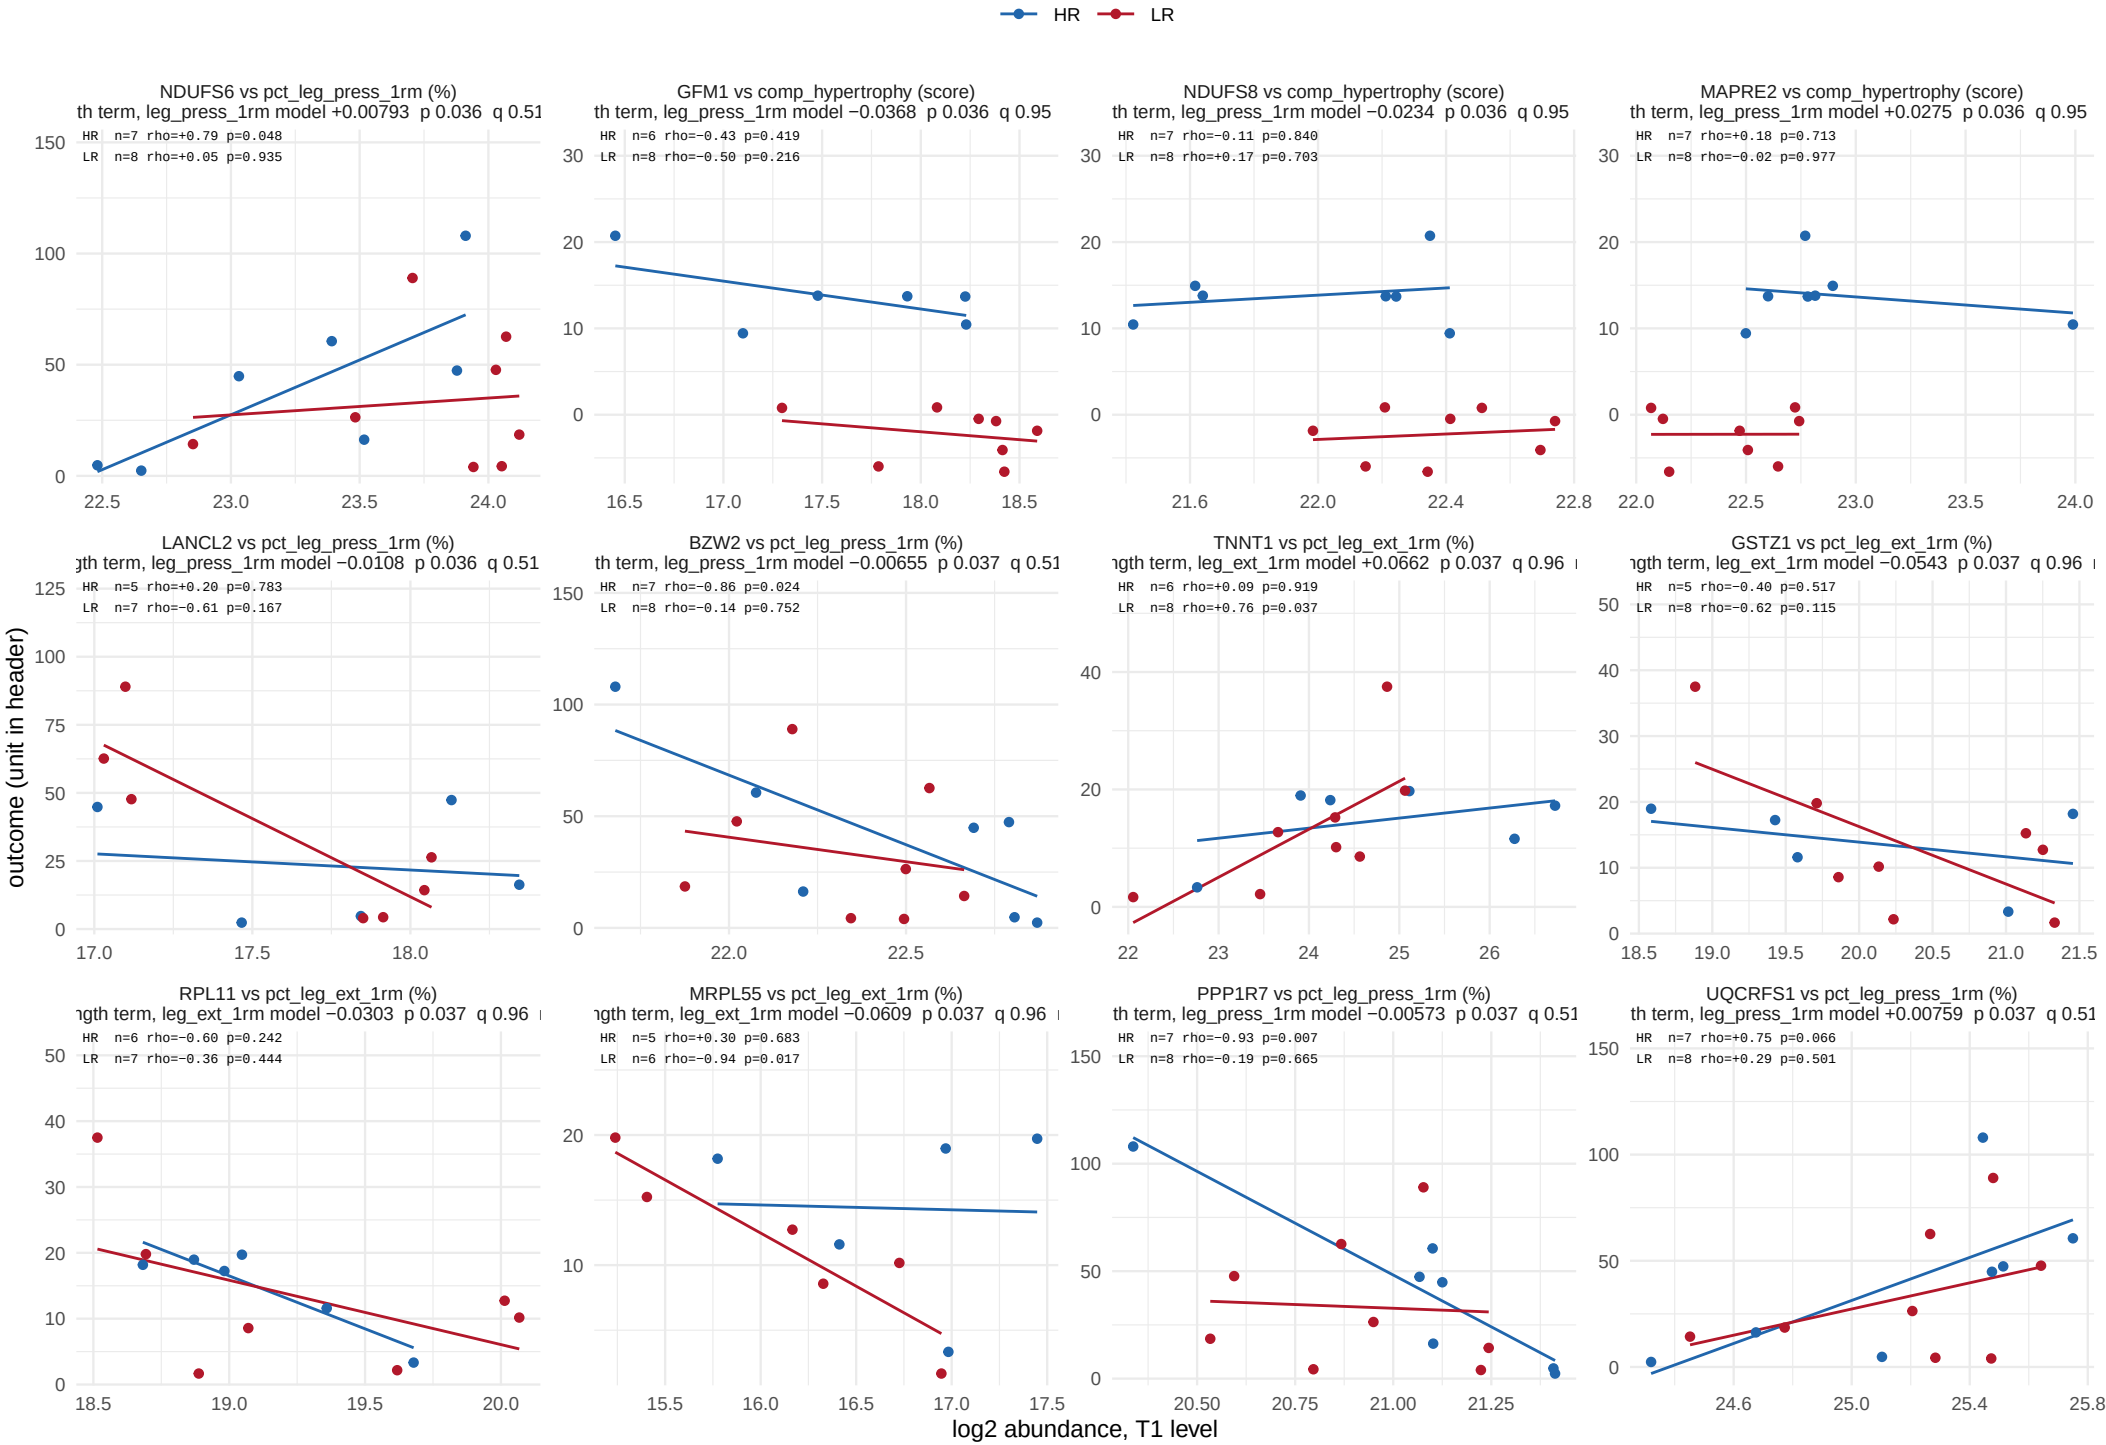

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, baseline window


357 of 6218 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 24 of 30.

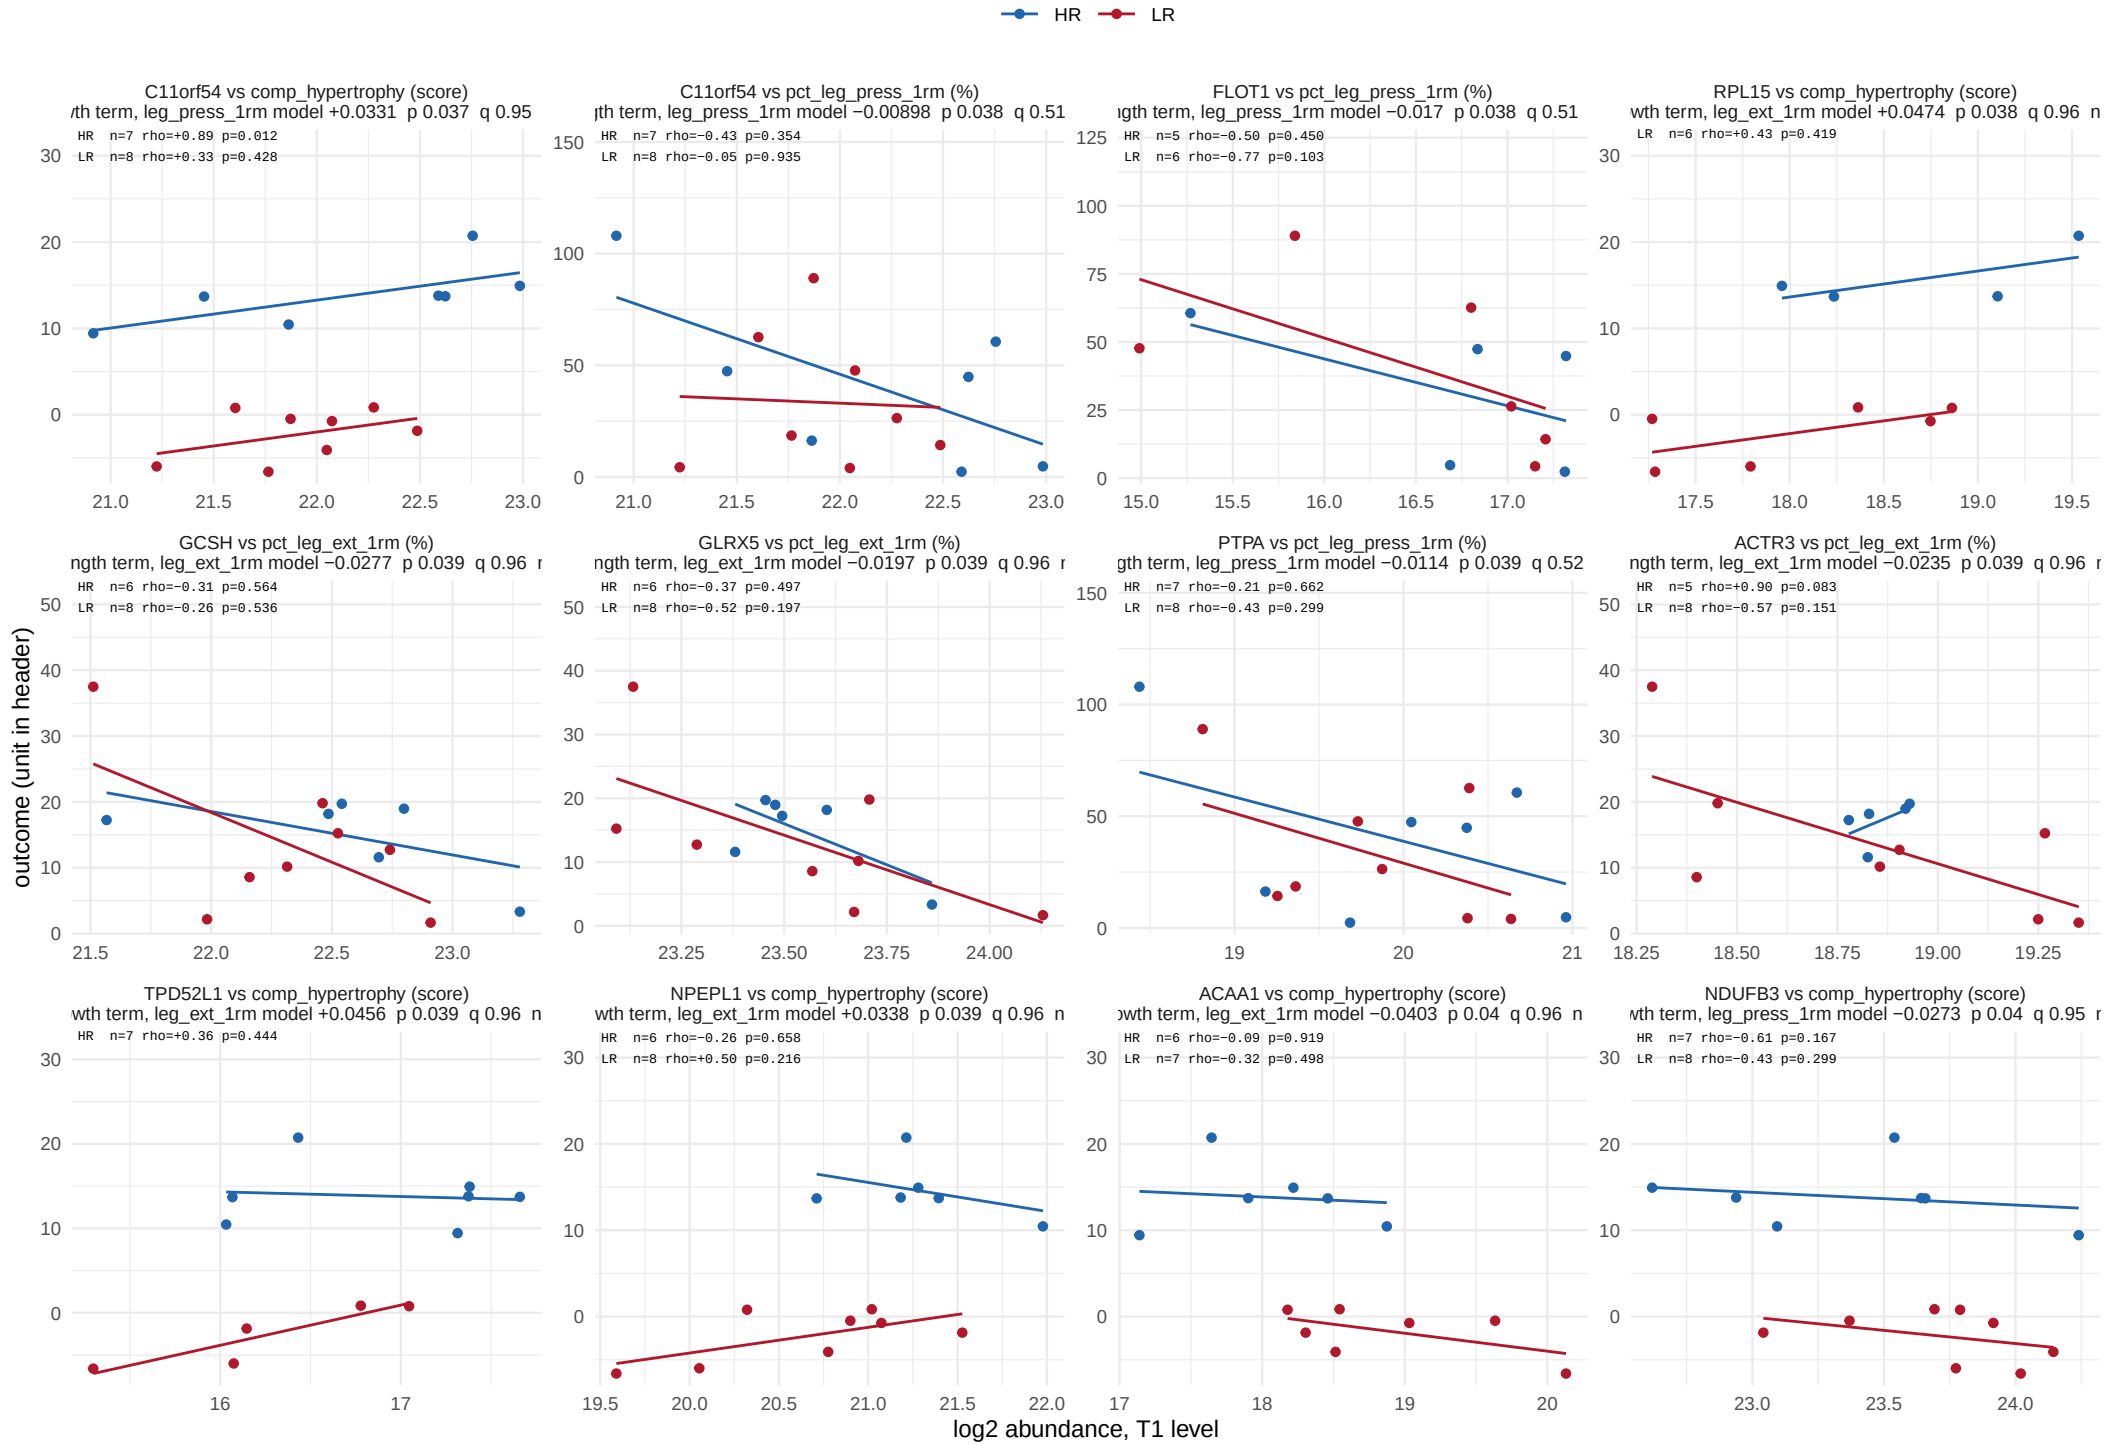

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, baseline window


357 of 6218 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 25 of 30.

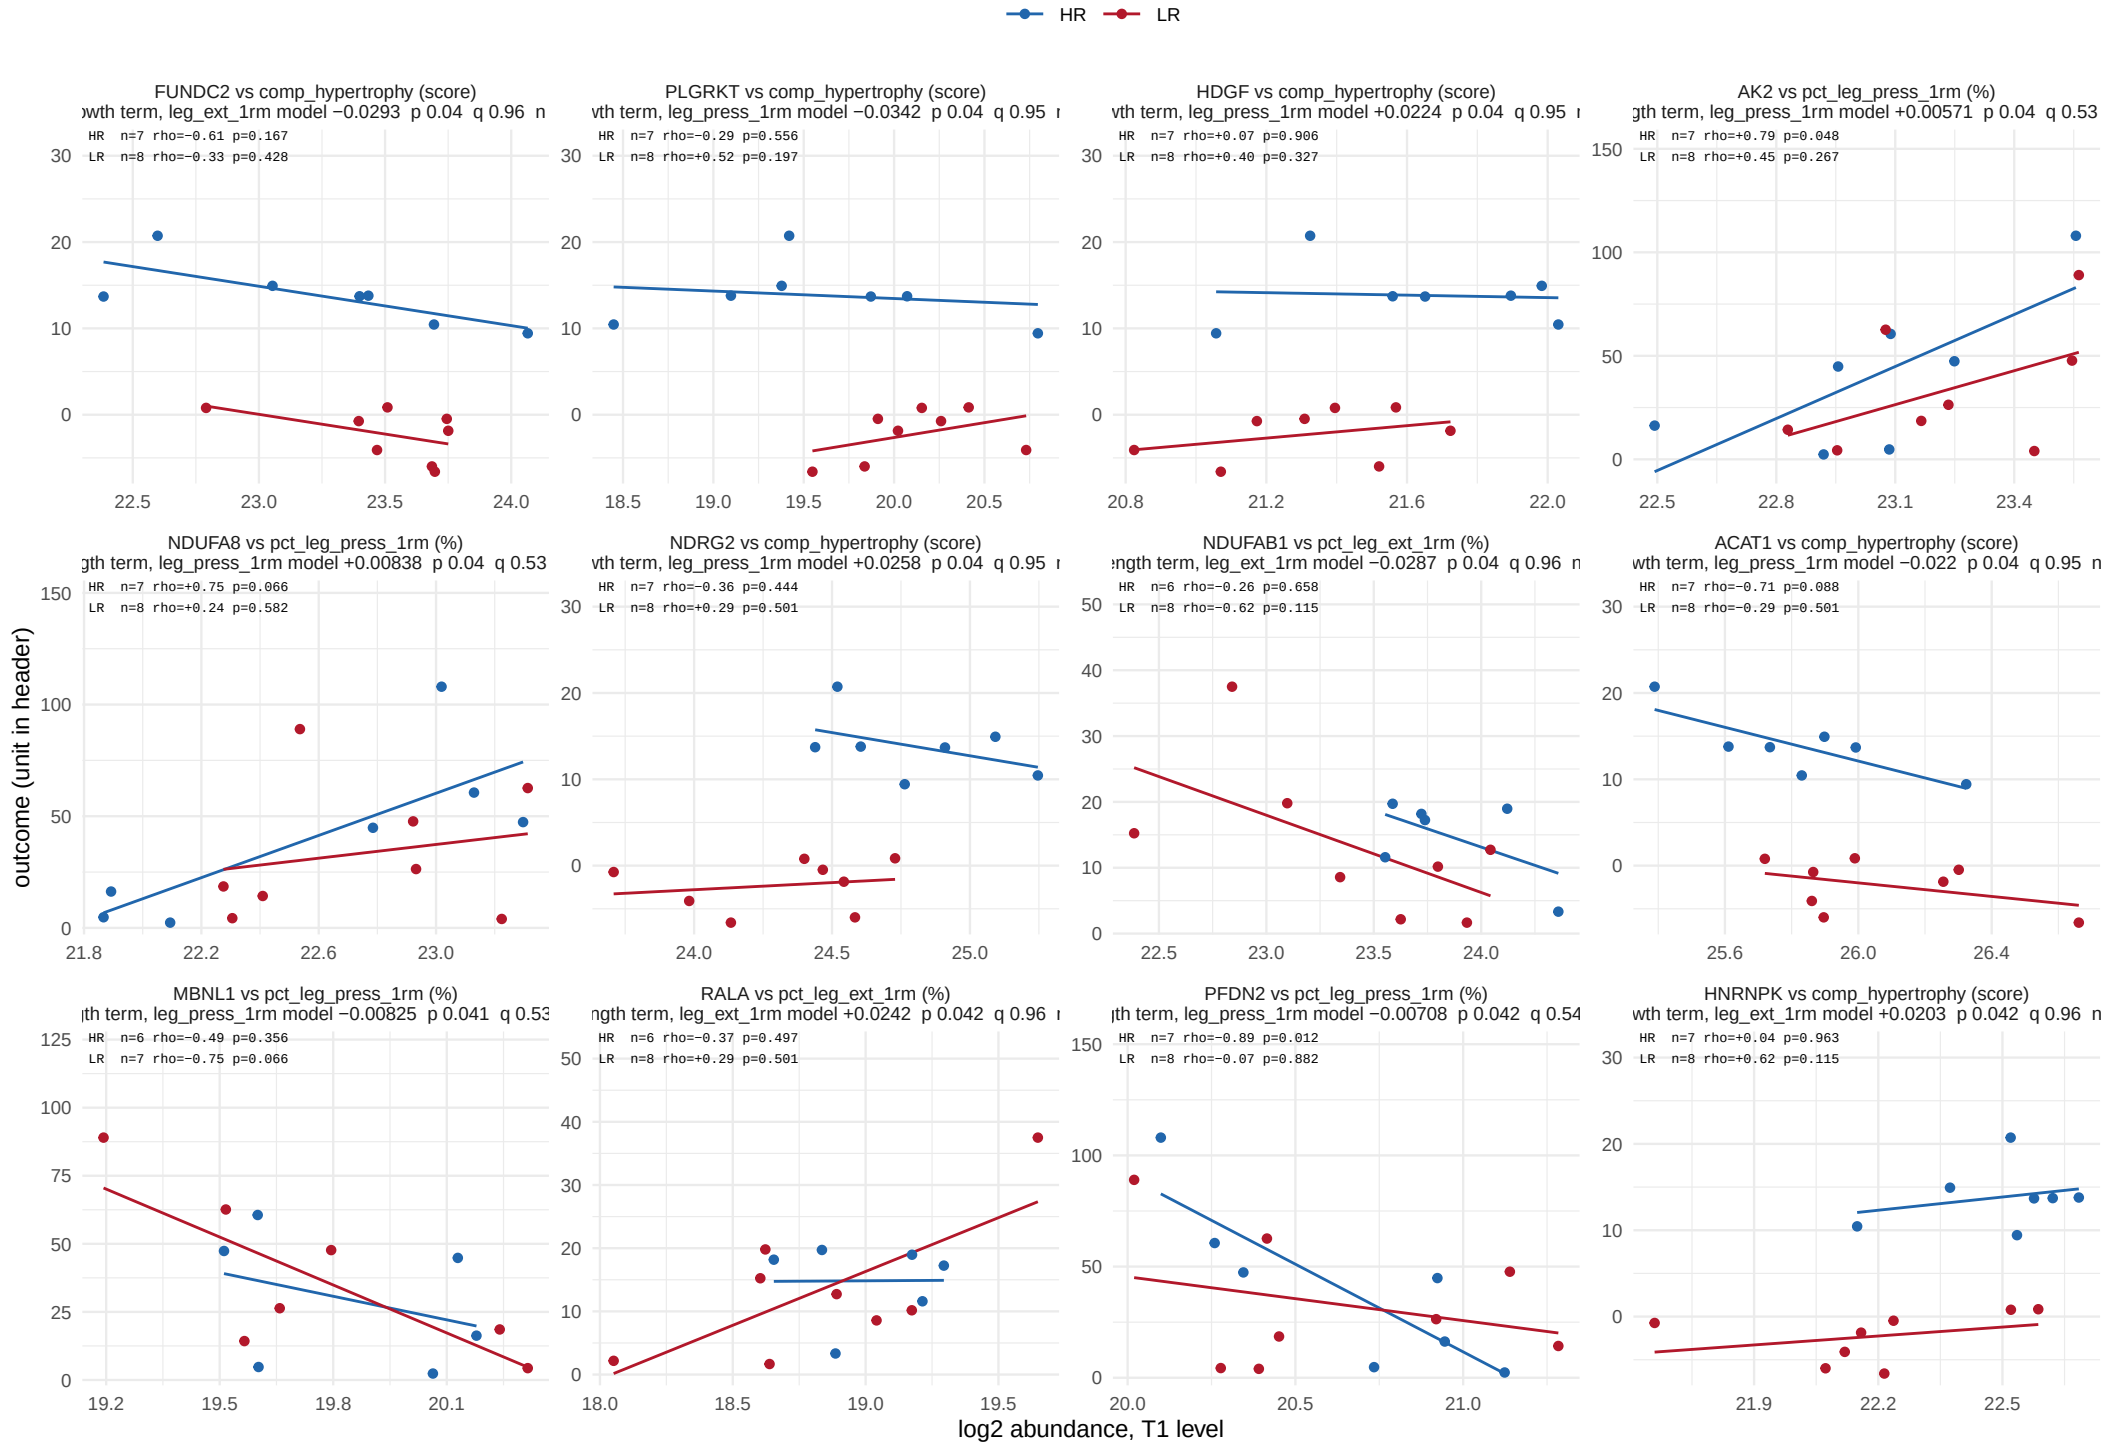

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, baseline window


357 of 6218 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 26 of 30.

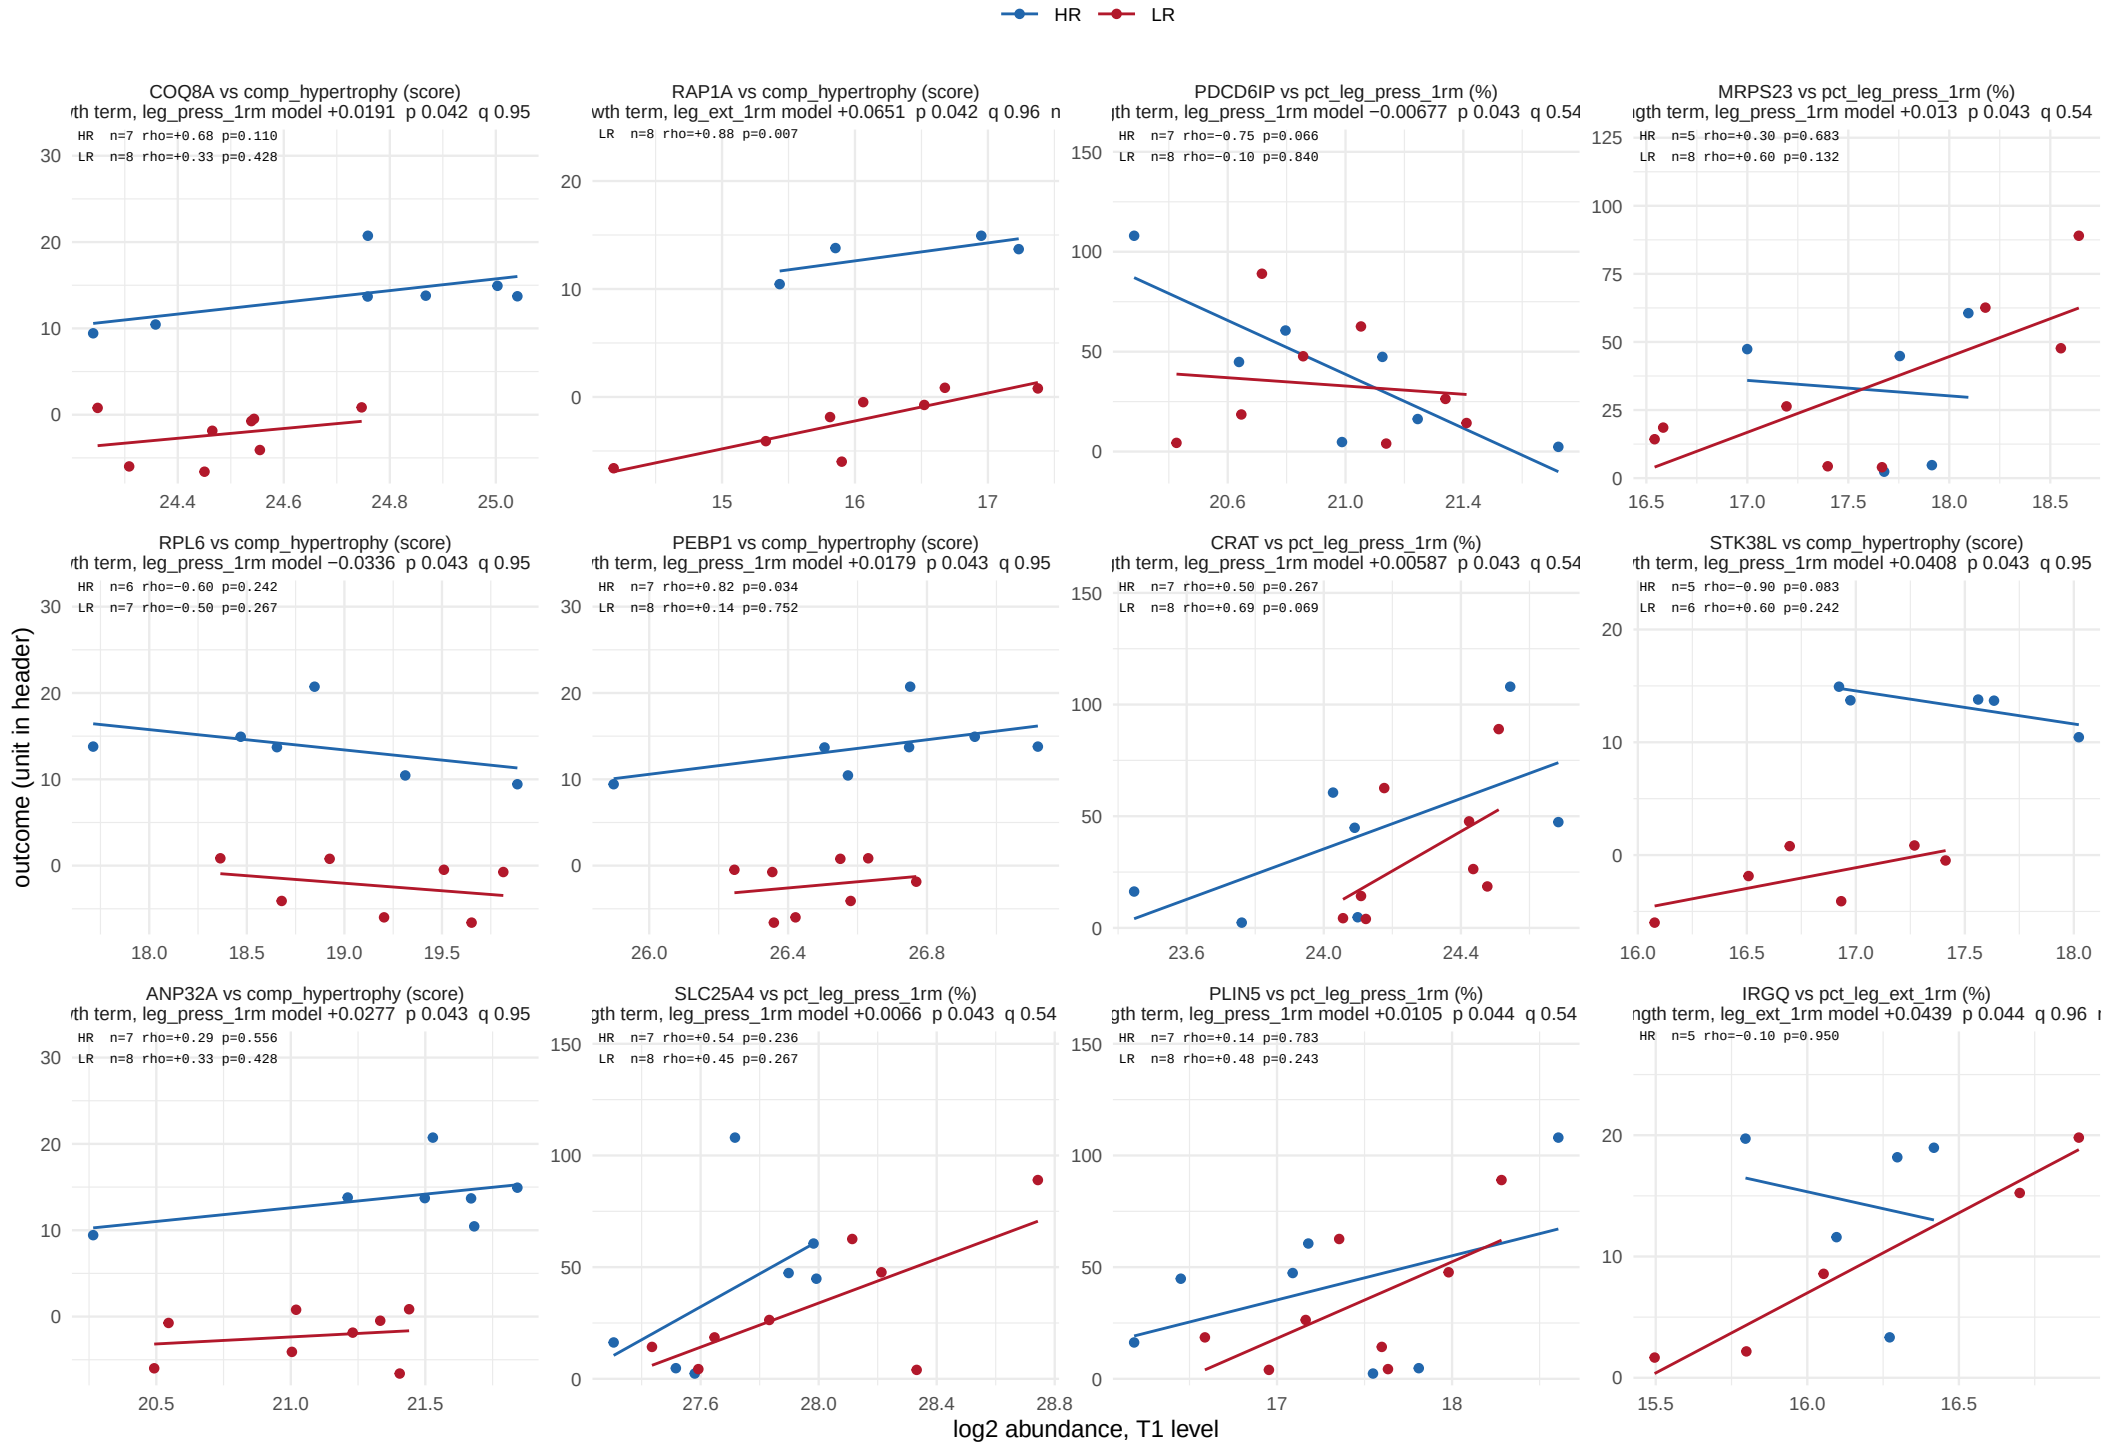

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, baseline window


357 of 6218 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 27 of 30.

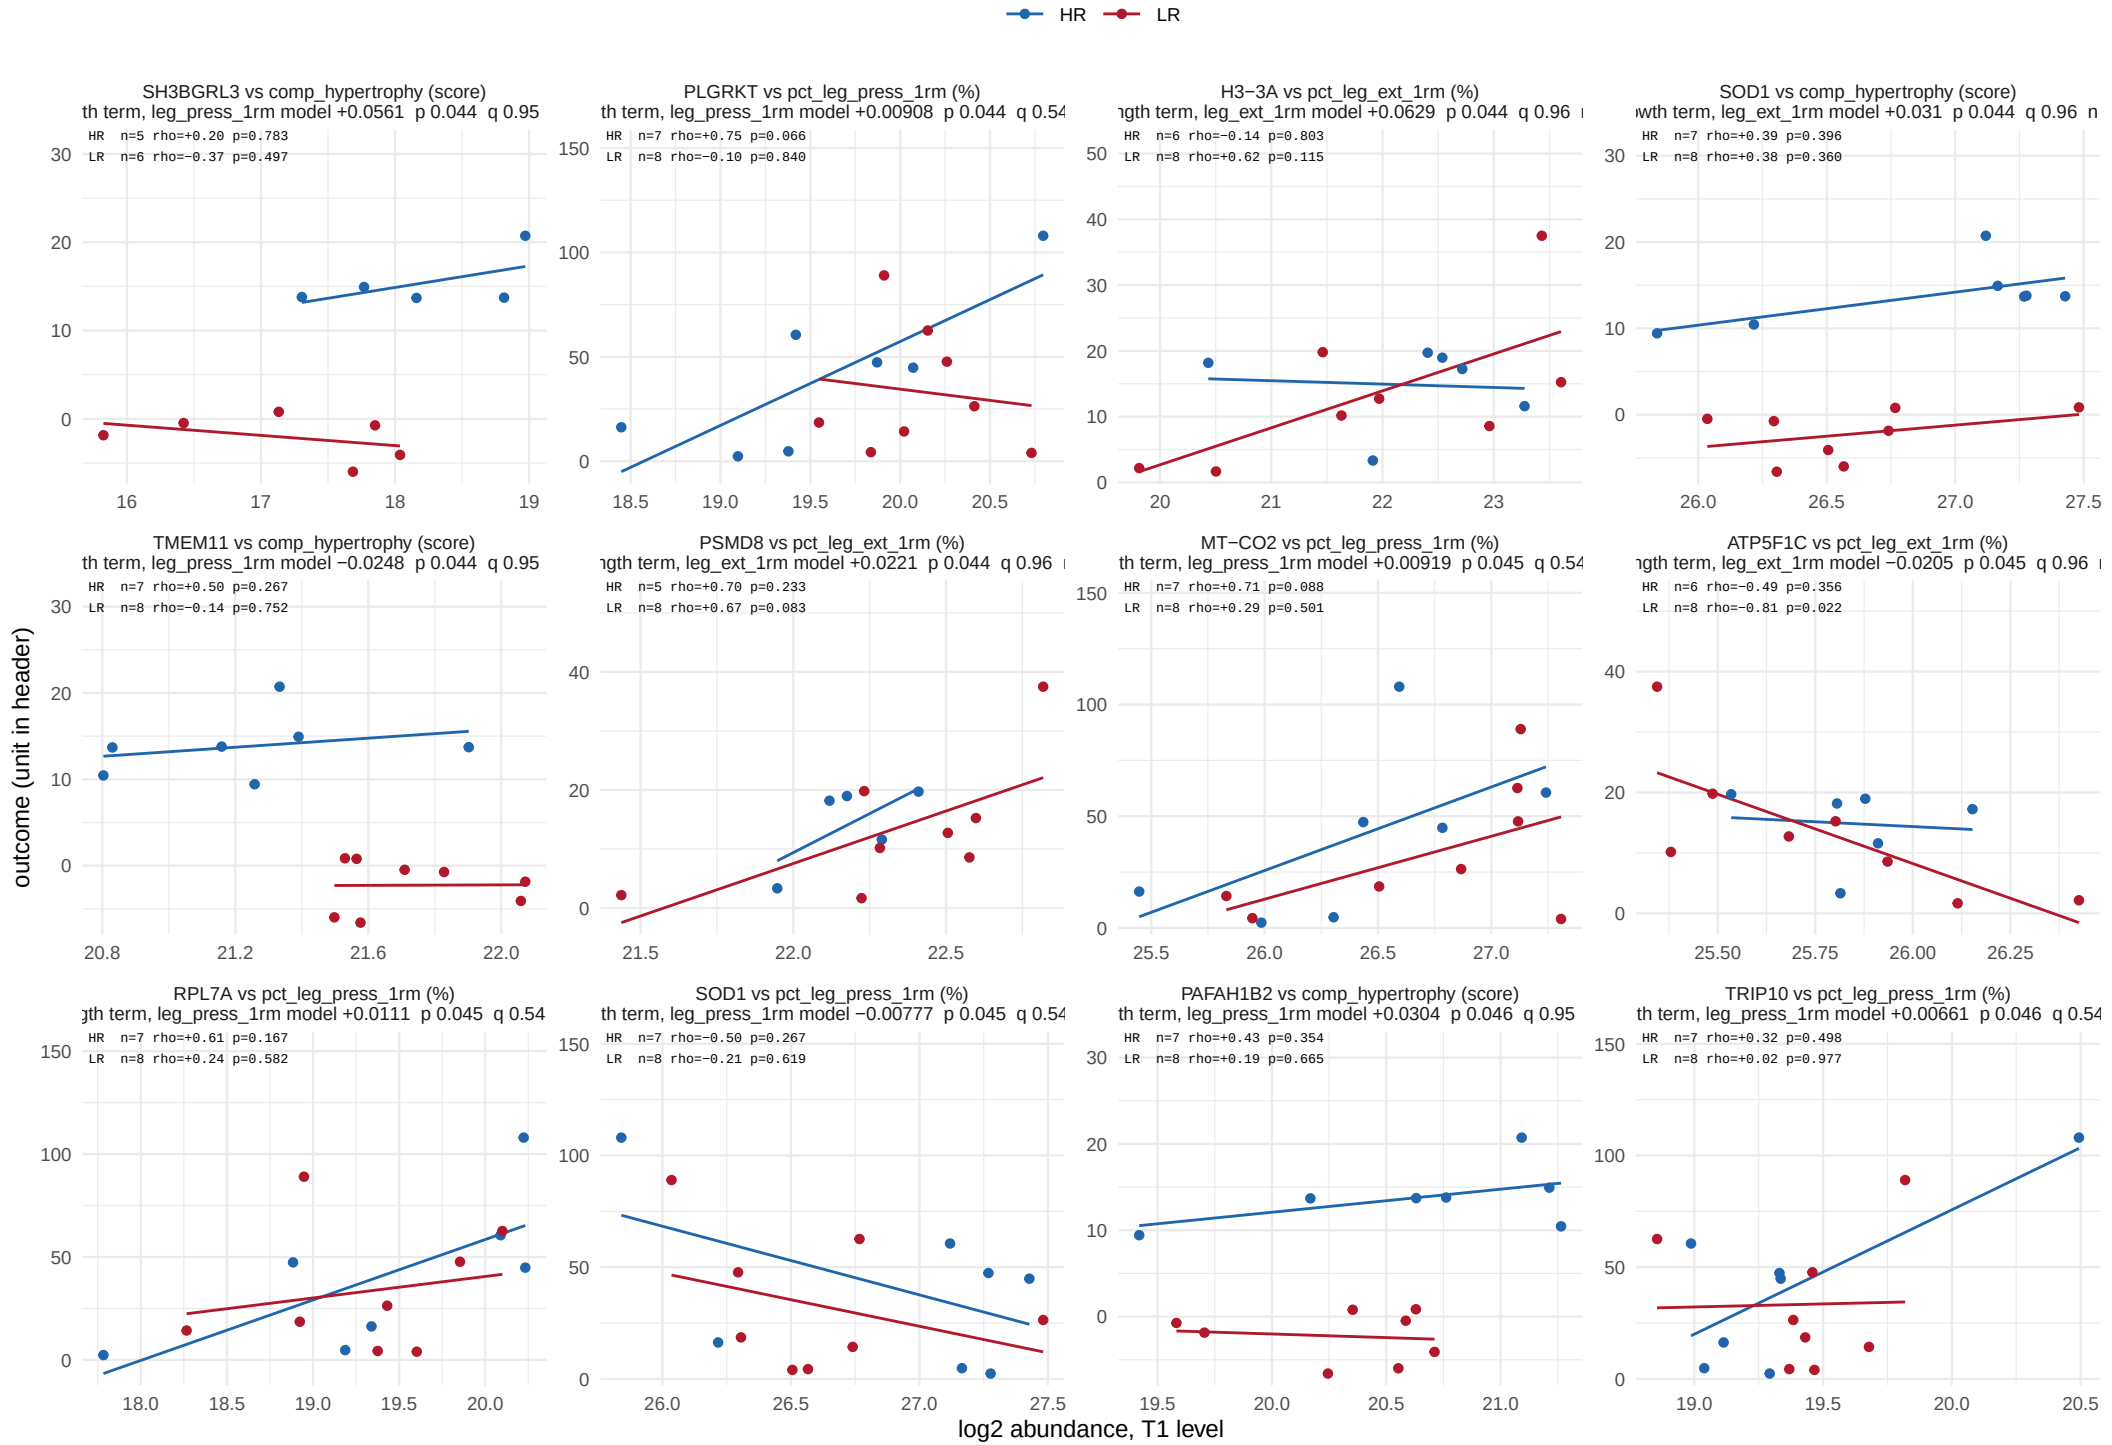

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, baseline window


357 of 6218 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 28 of 30.

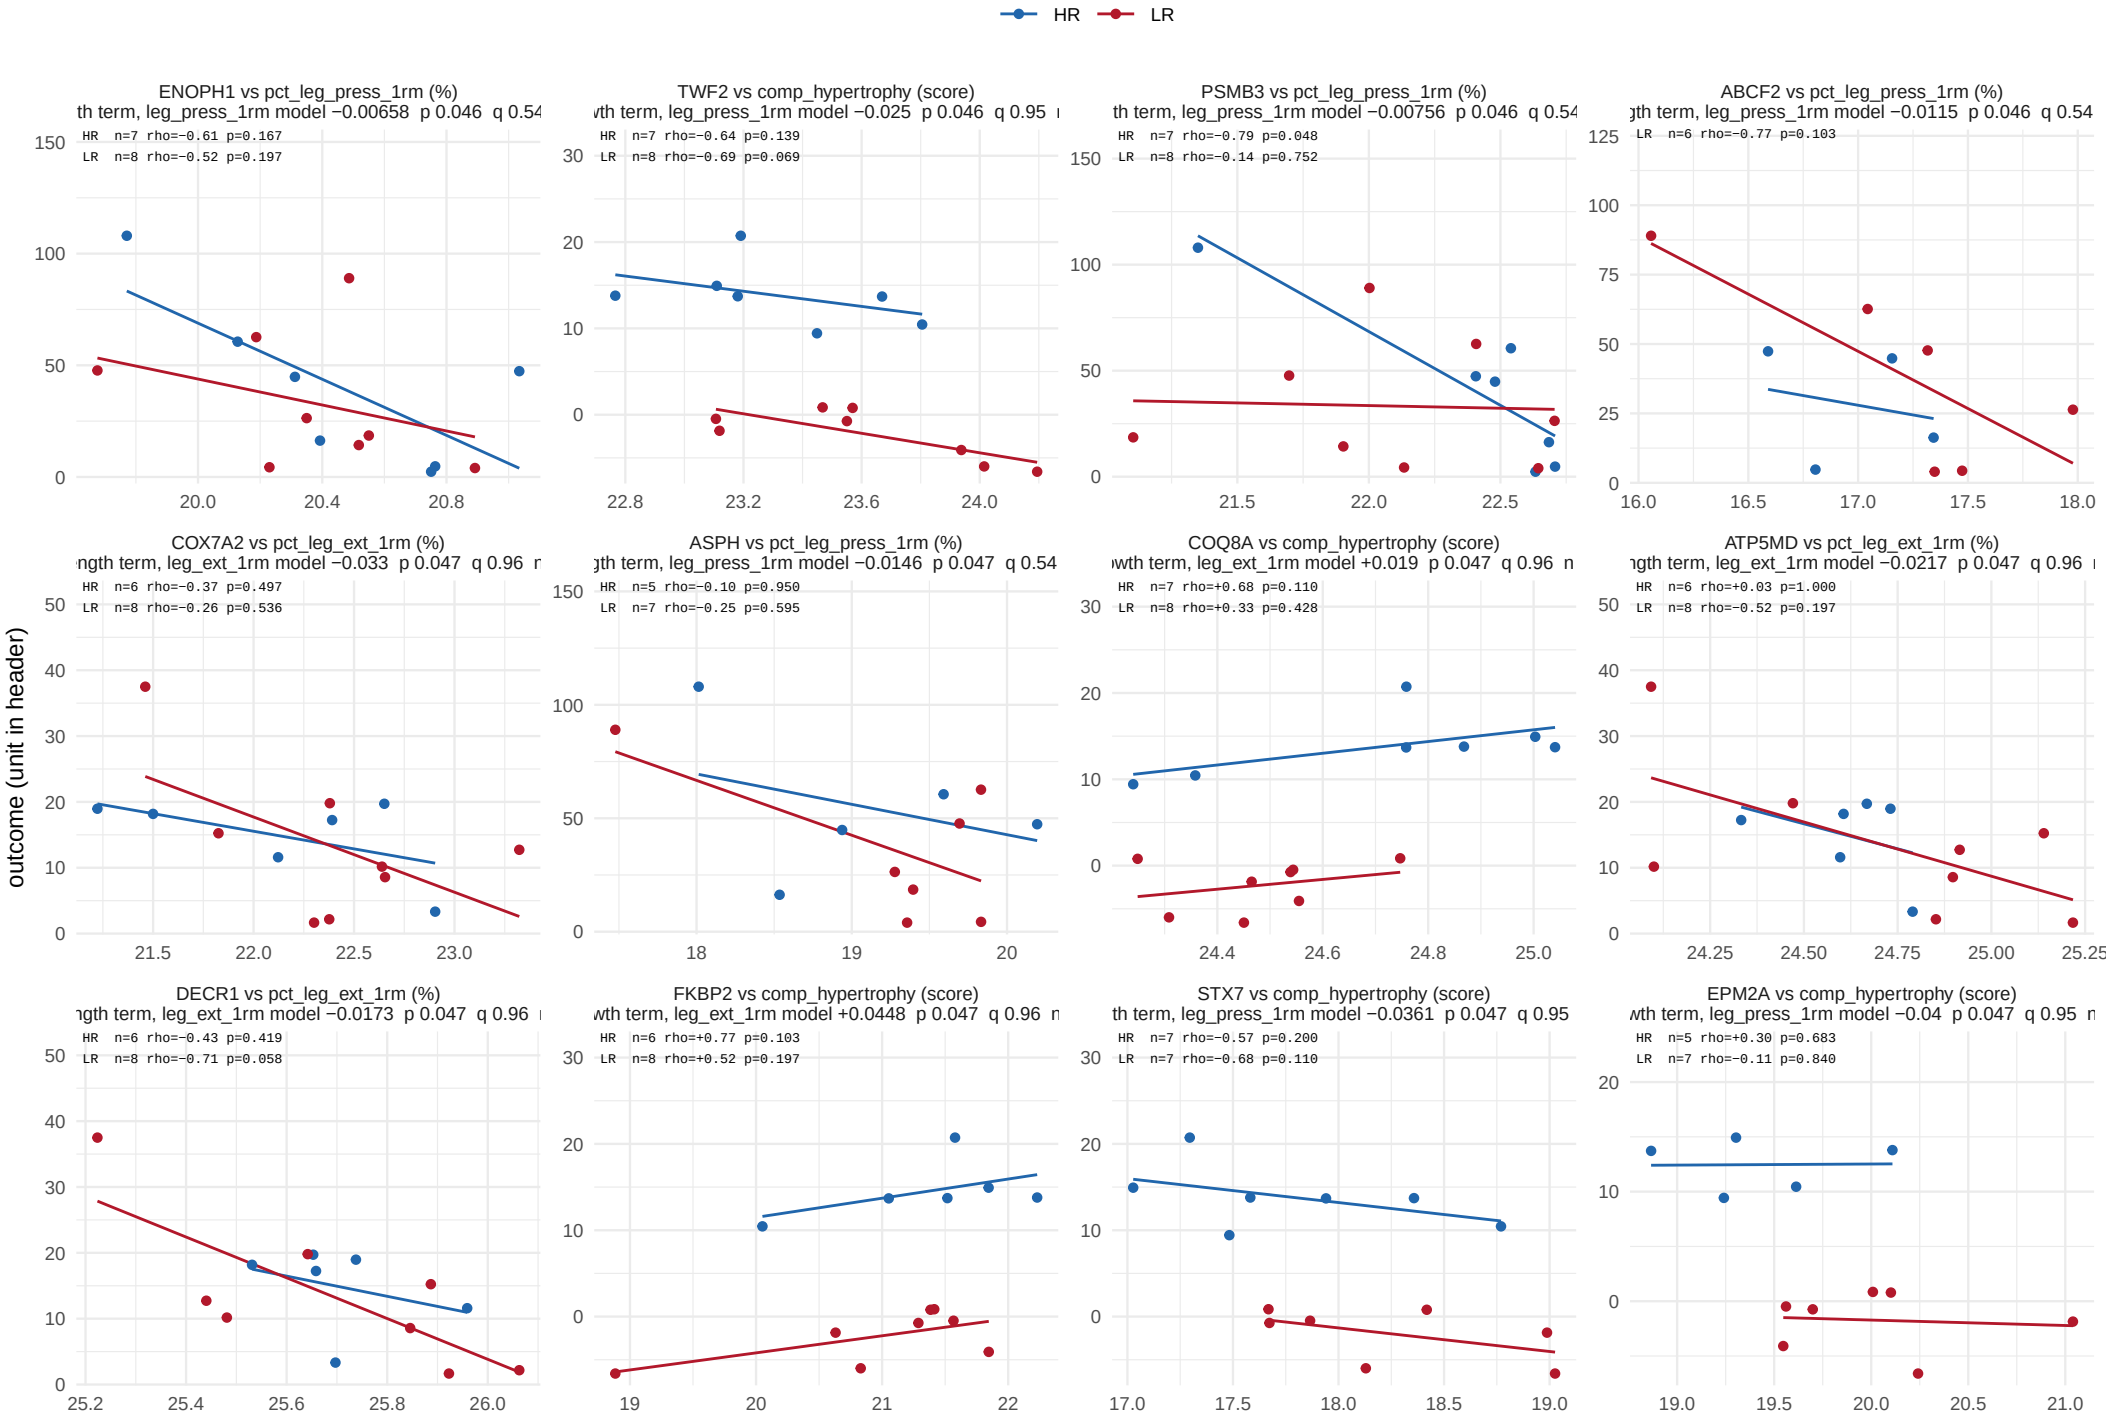

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, baseline window


357 of 6218 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 29 of 30.

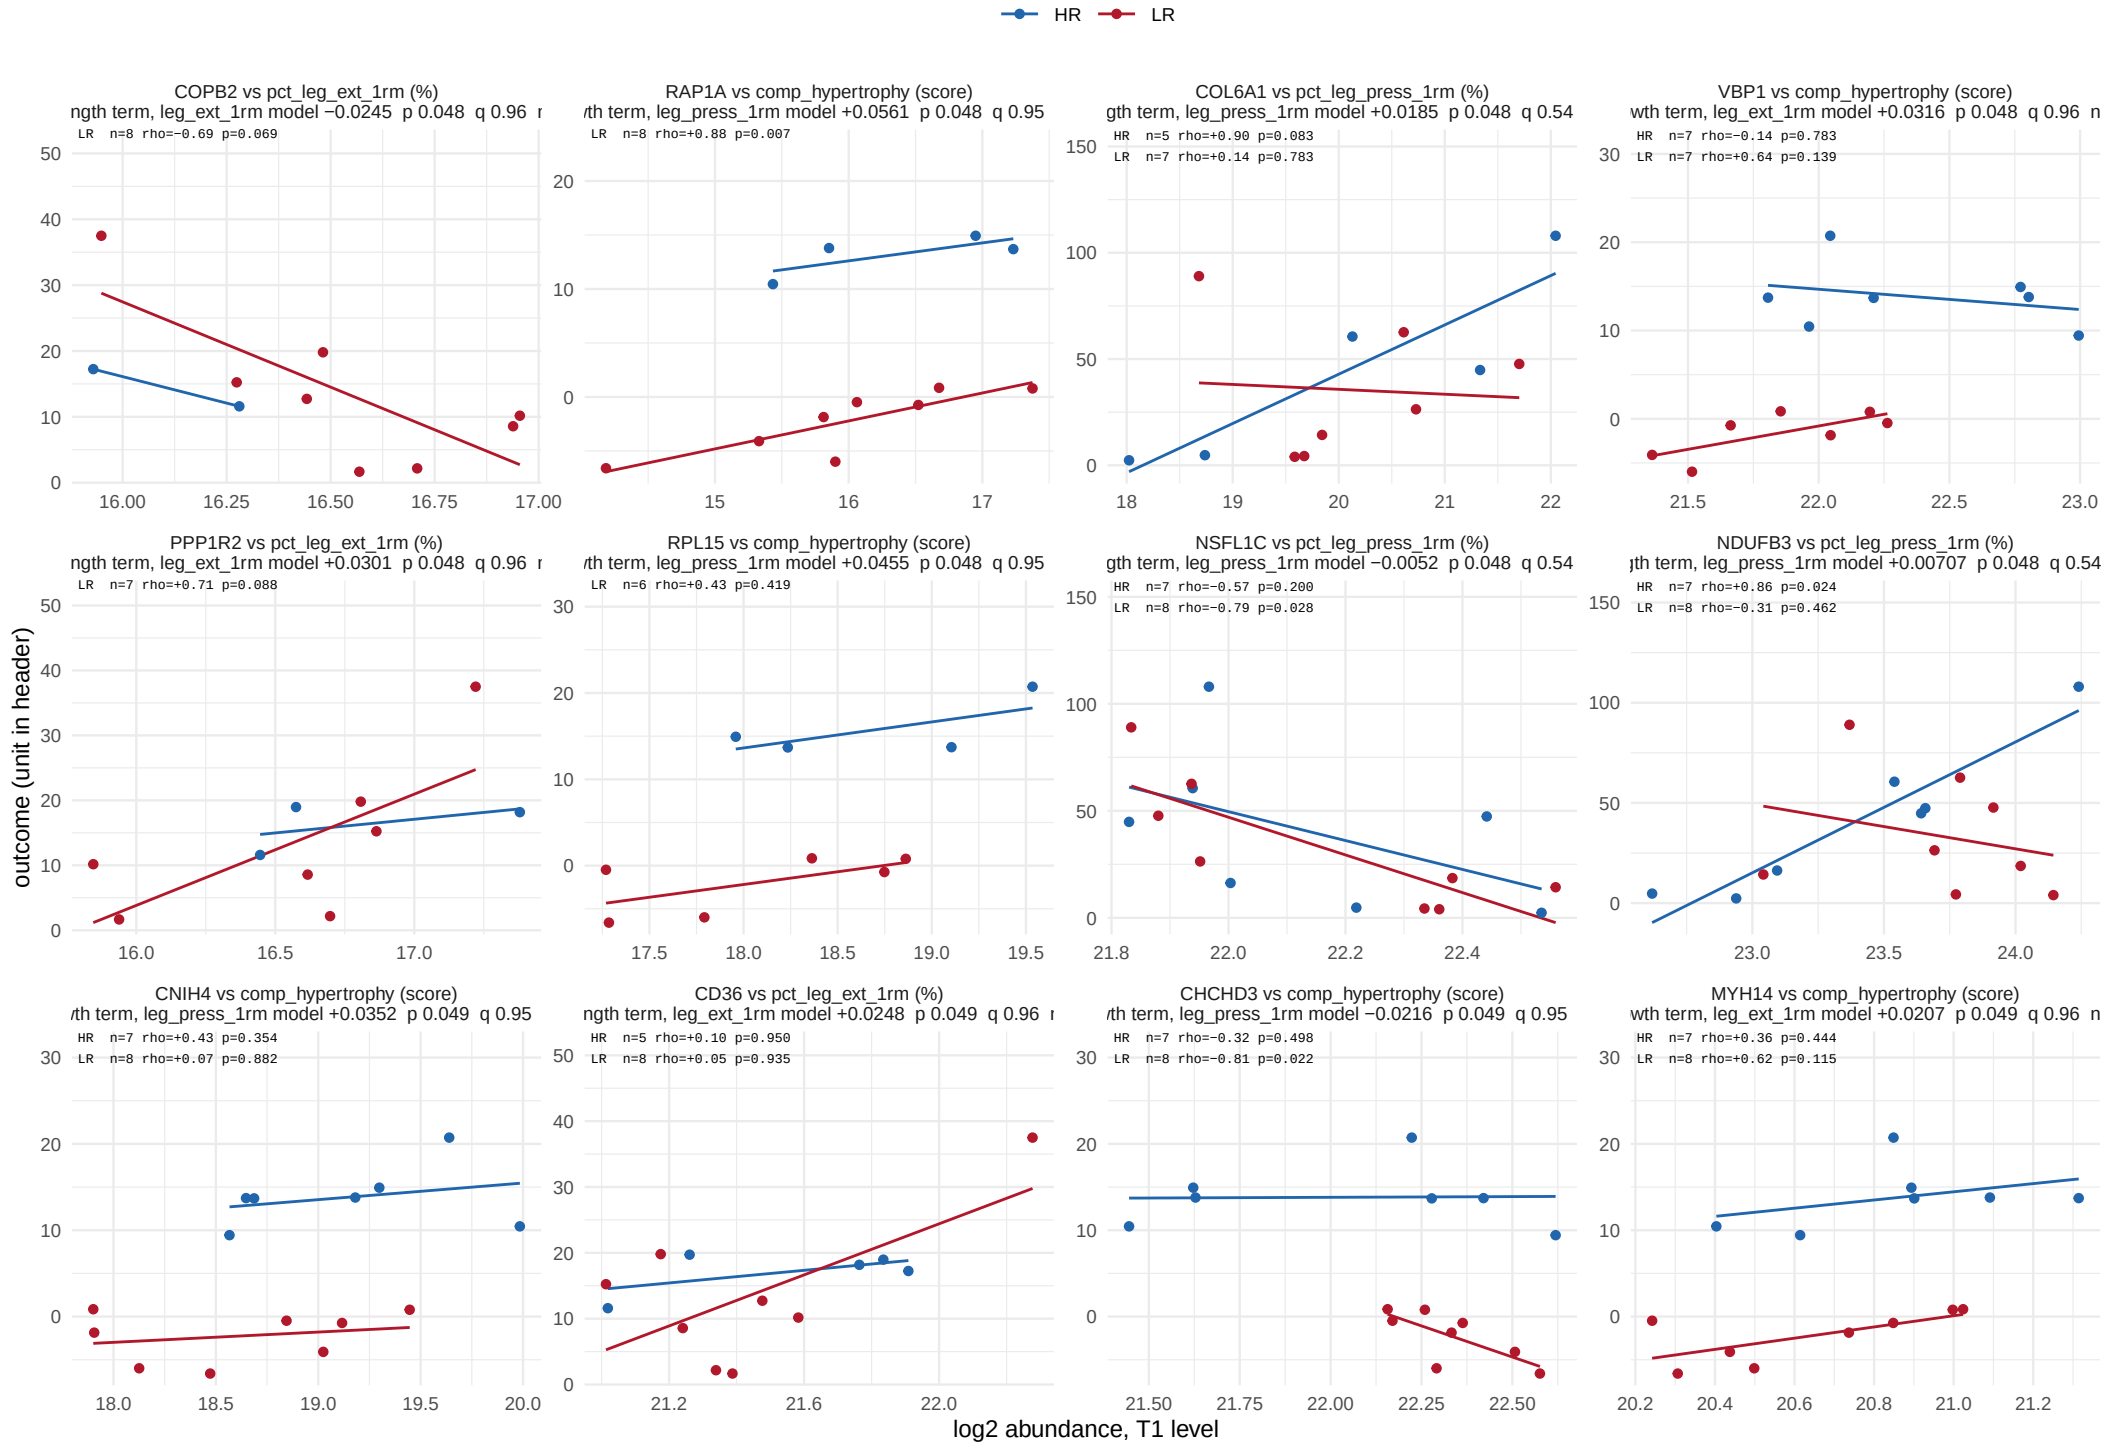

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, baseline window


357 of 6218 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 30 of 30.

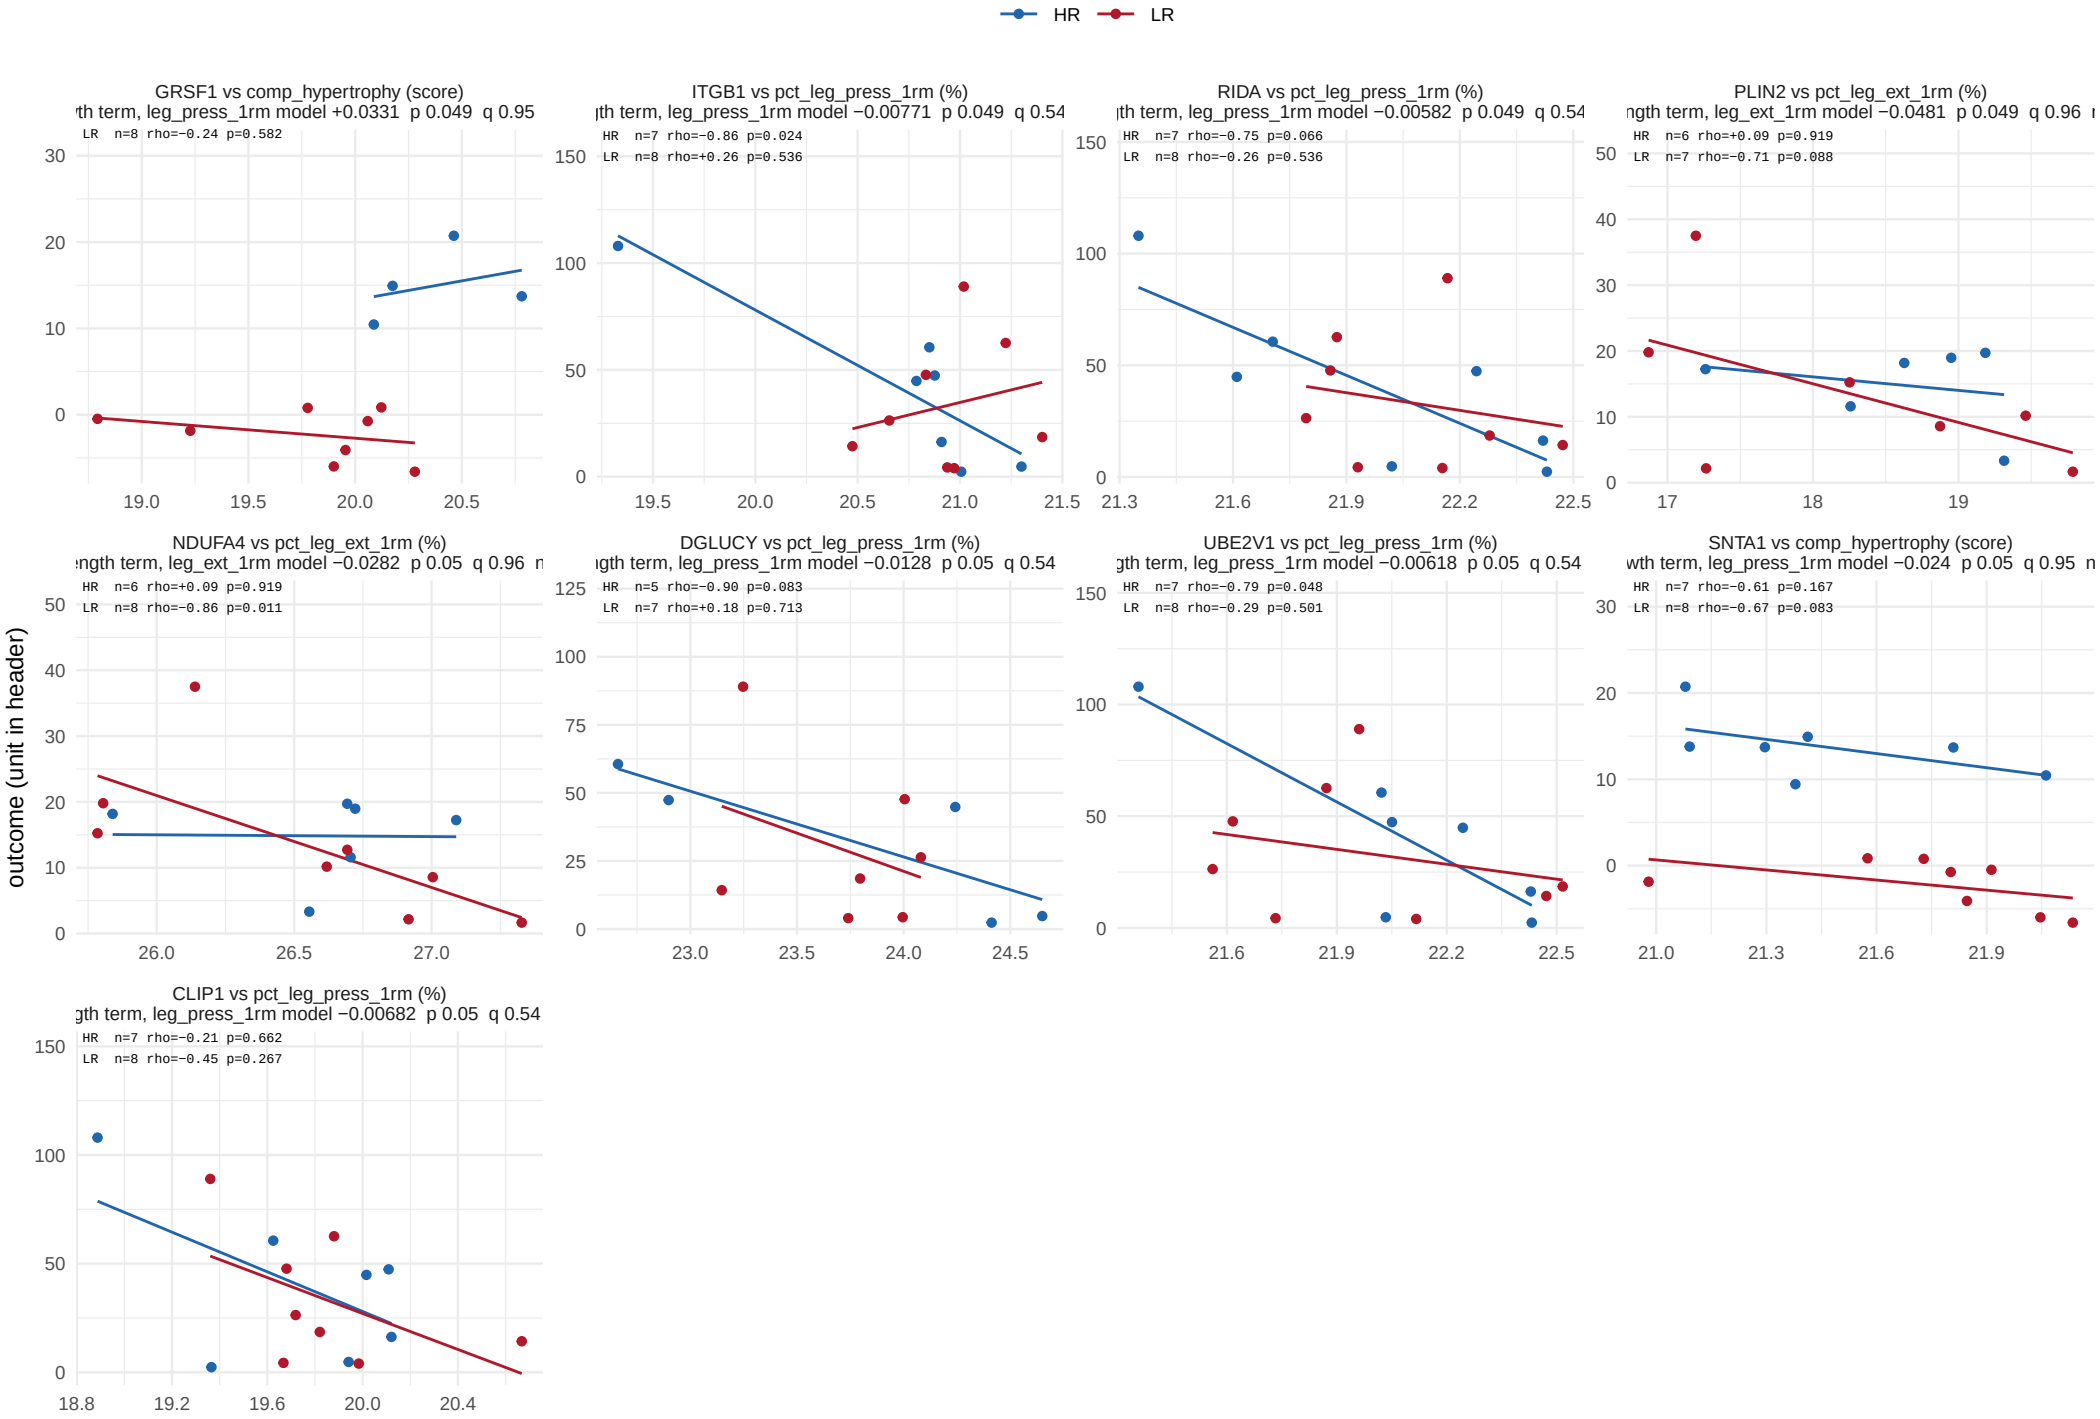

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, acute window


378 of 5806 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 1 of 32.

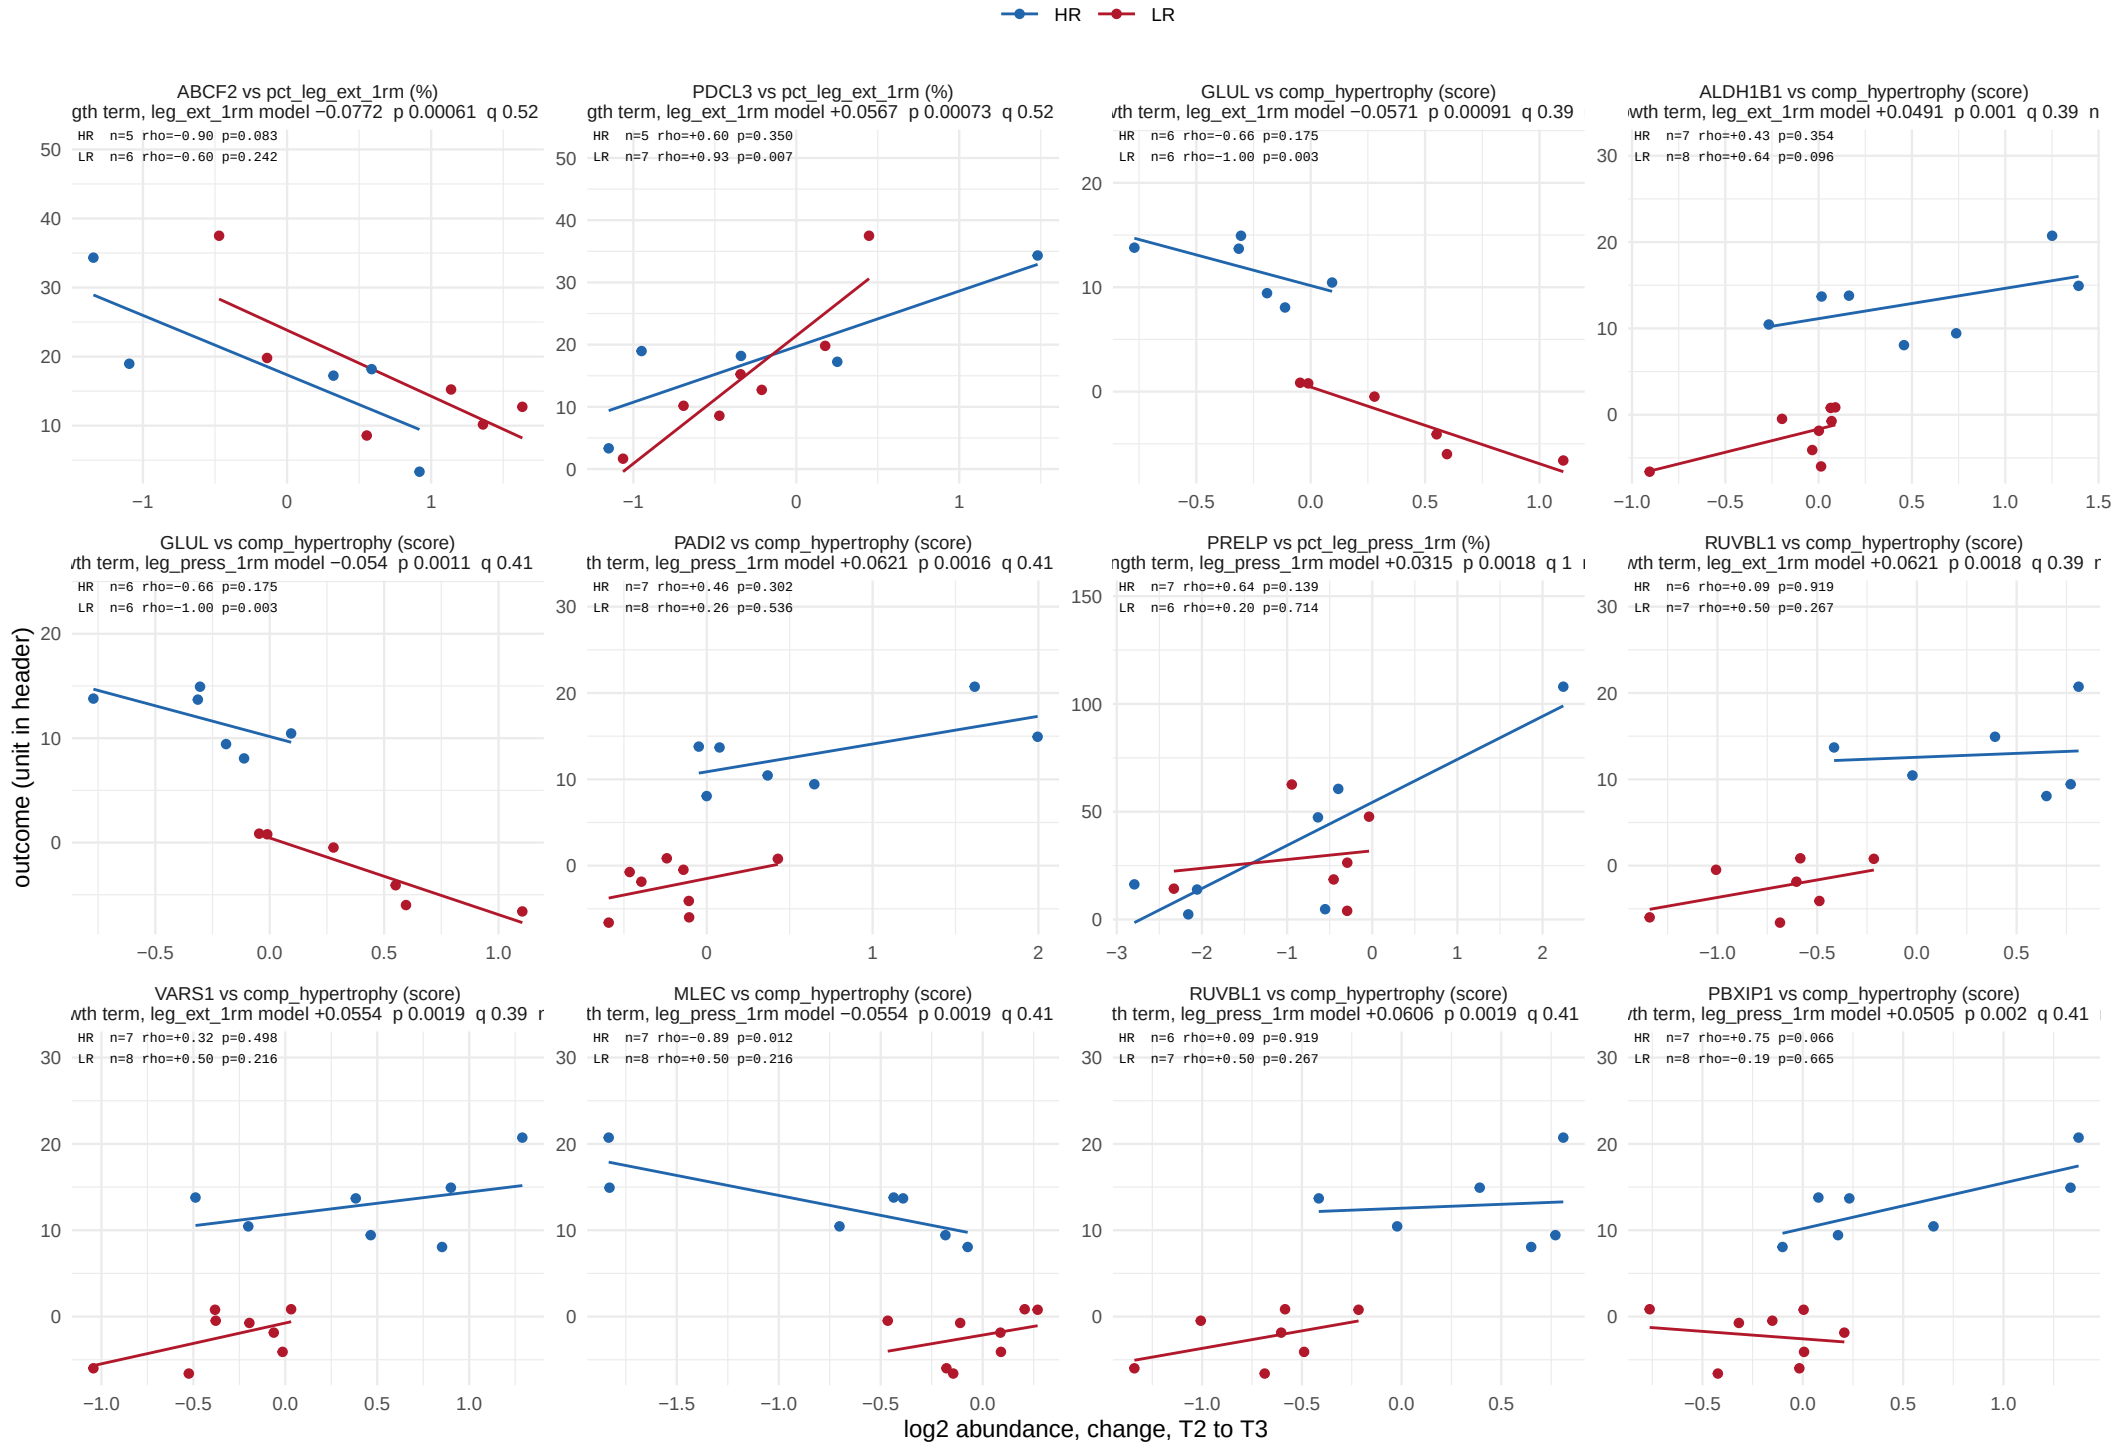

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.


Two predictor, acute window

378 of 5806 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 2 of 32.

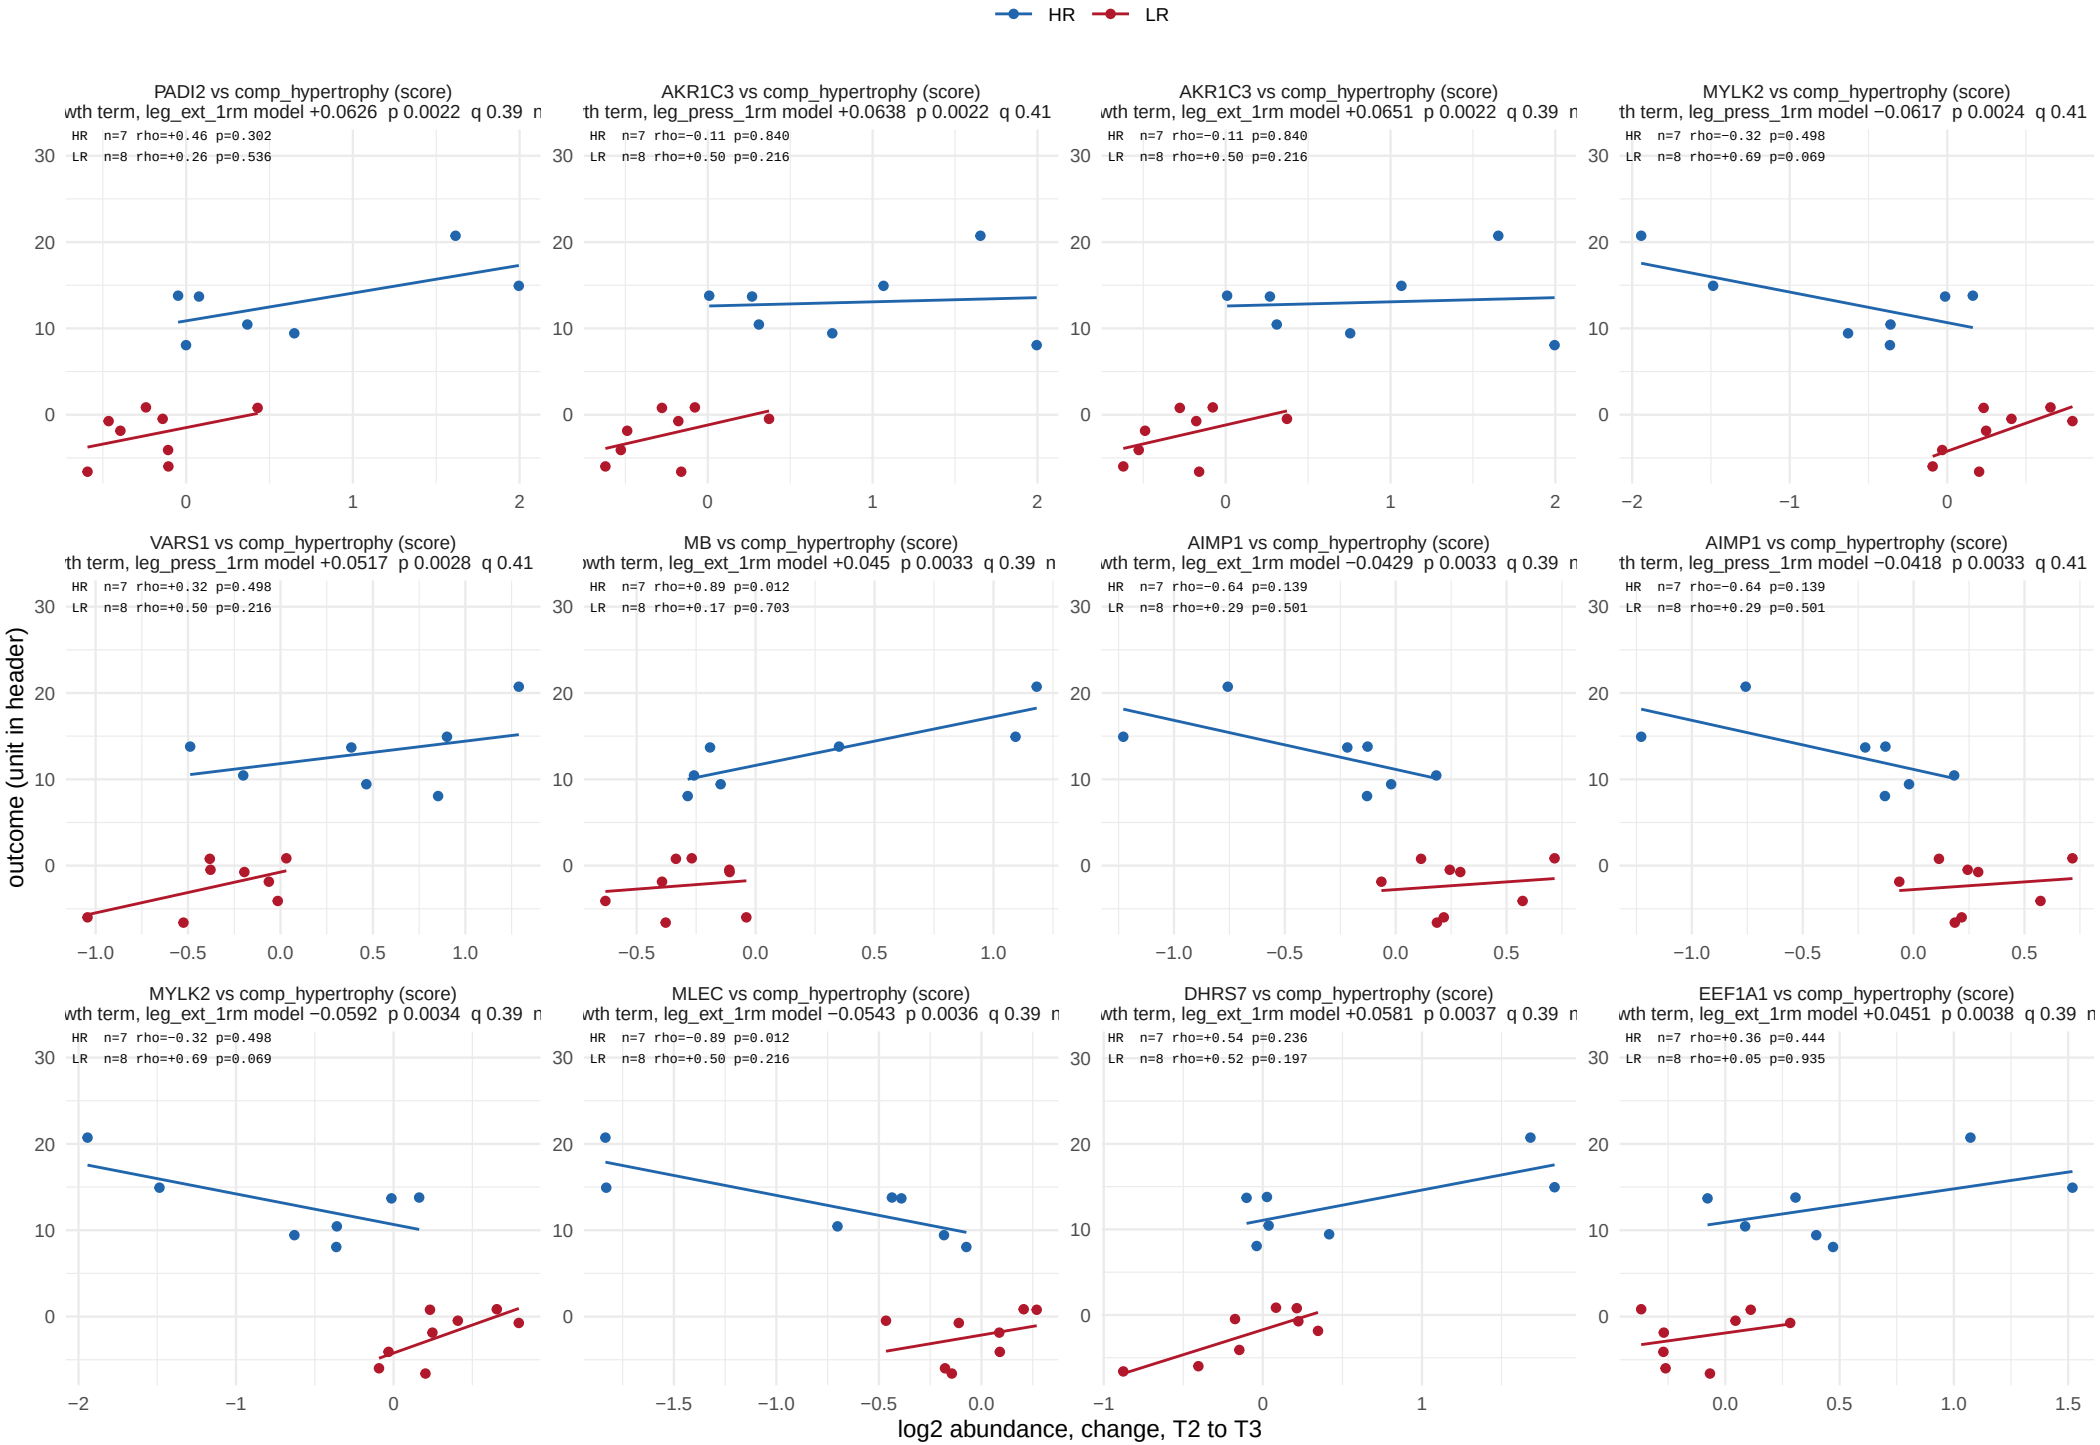

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.


Two predictor, acute window

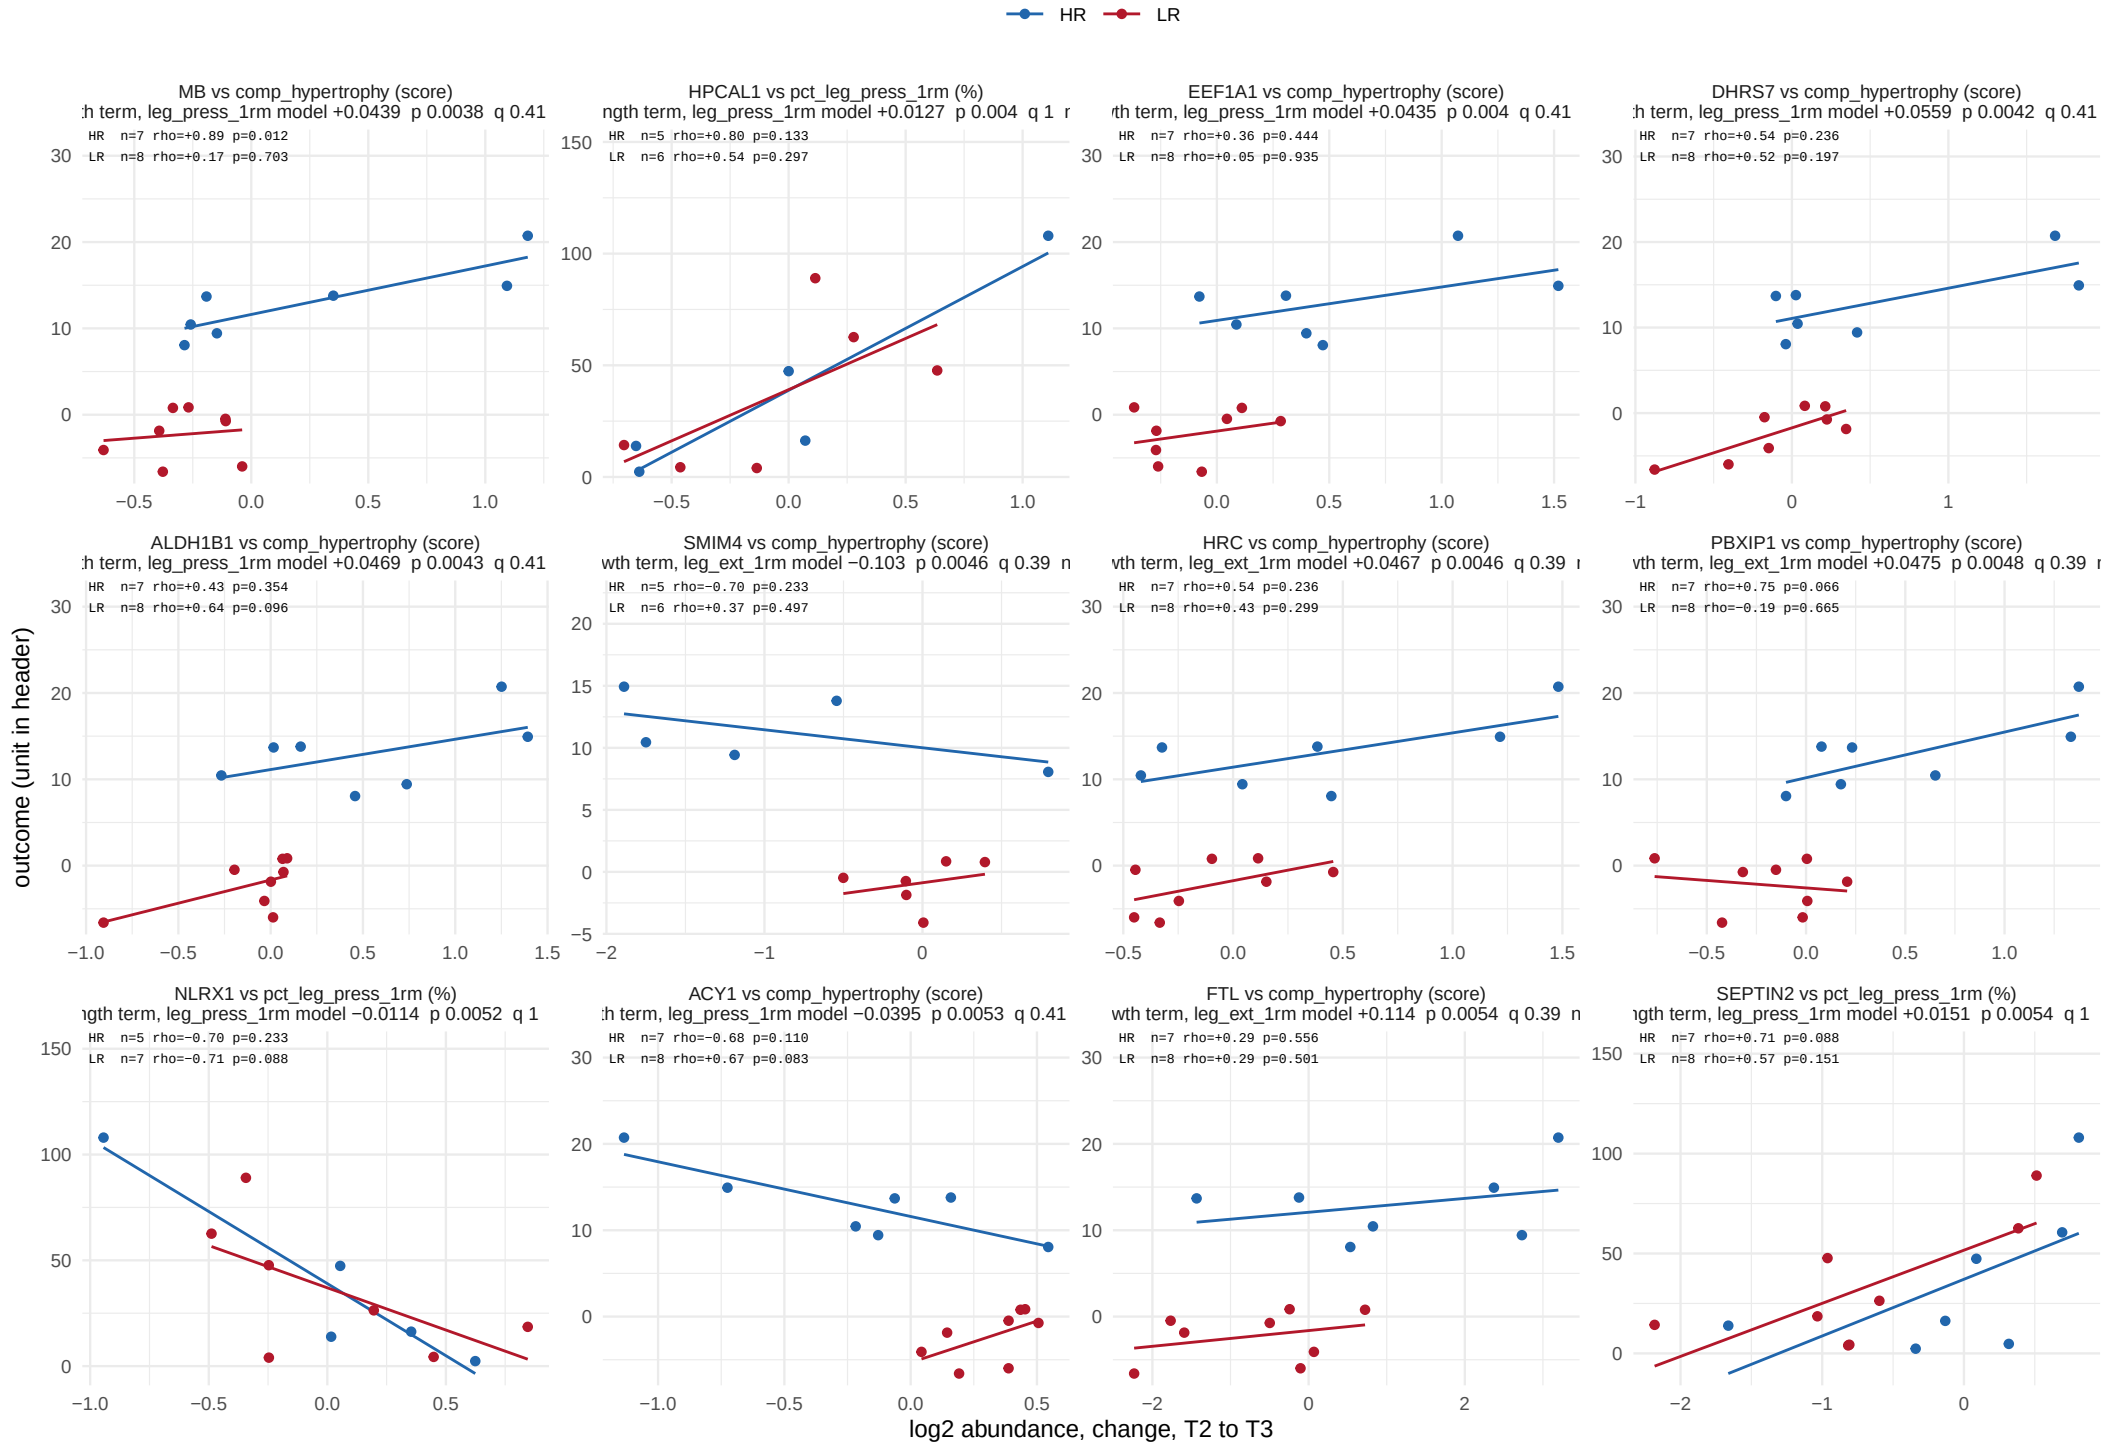

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, acute window


378 of 5806 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 4 of 32.

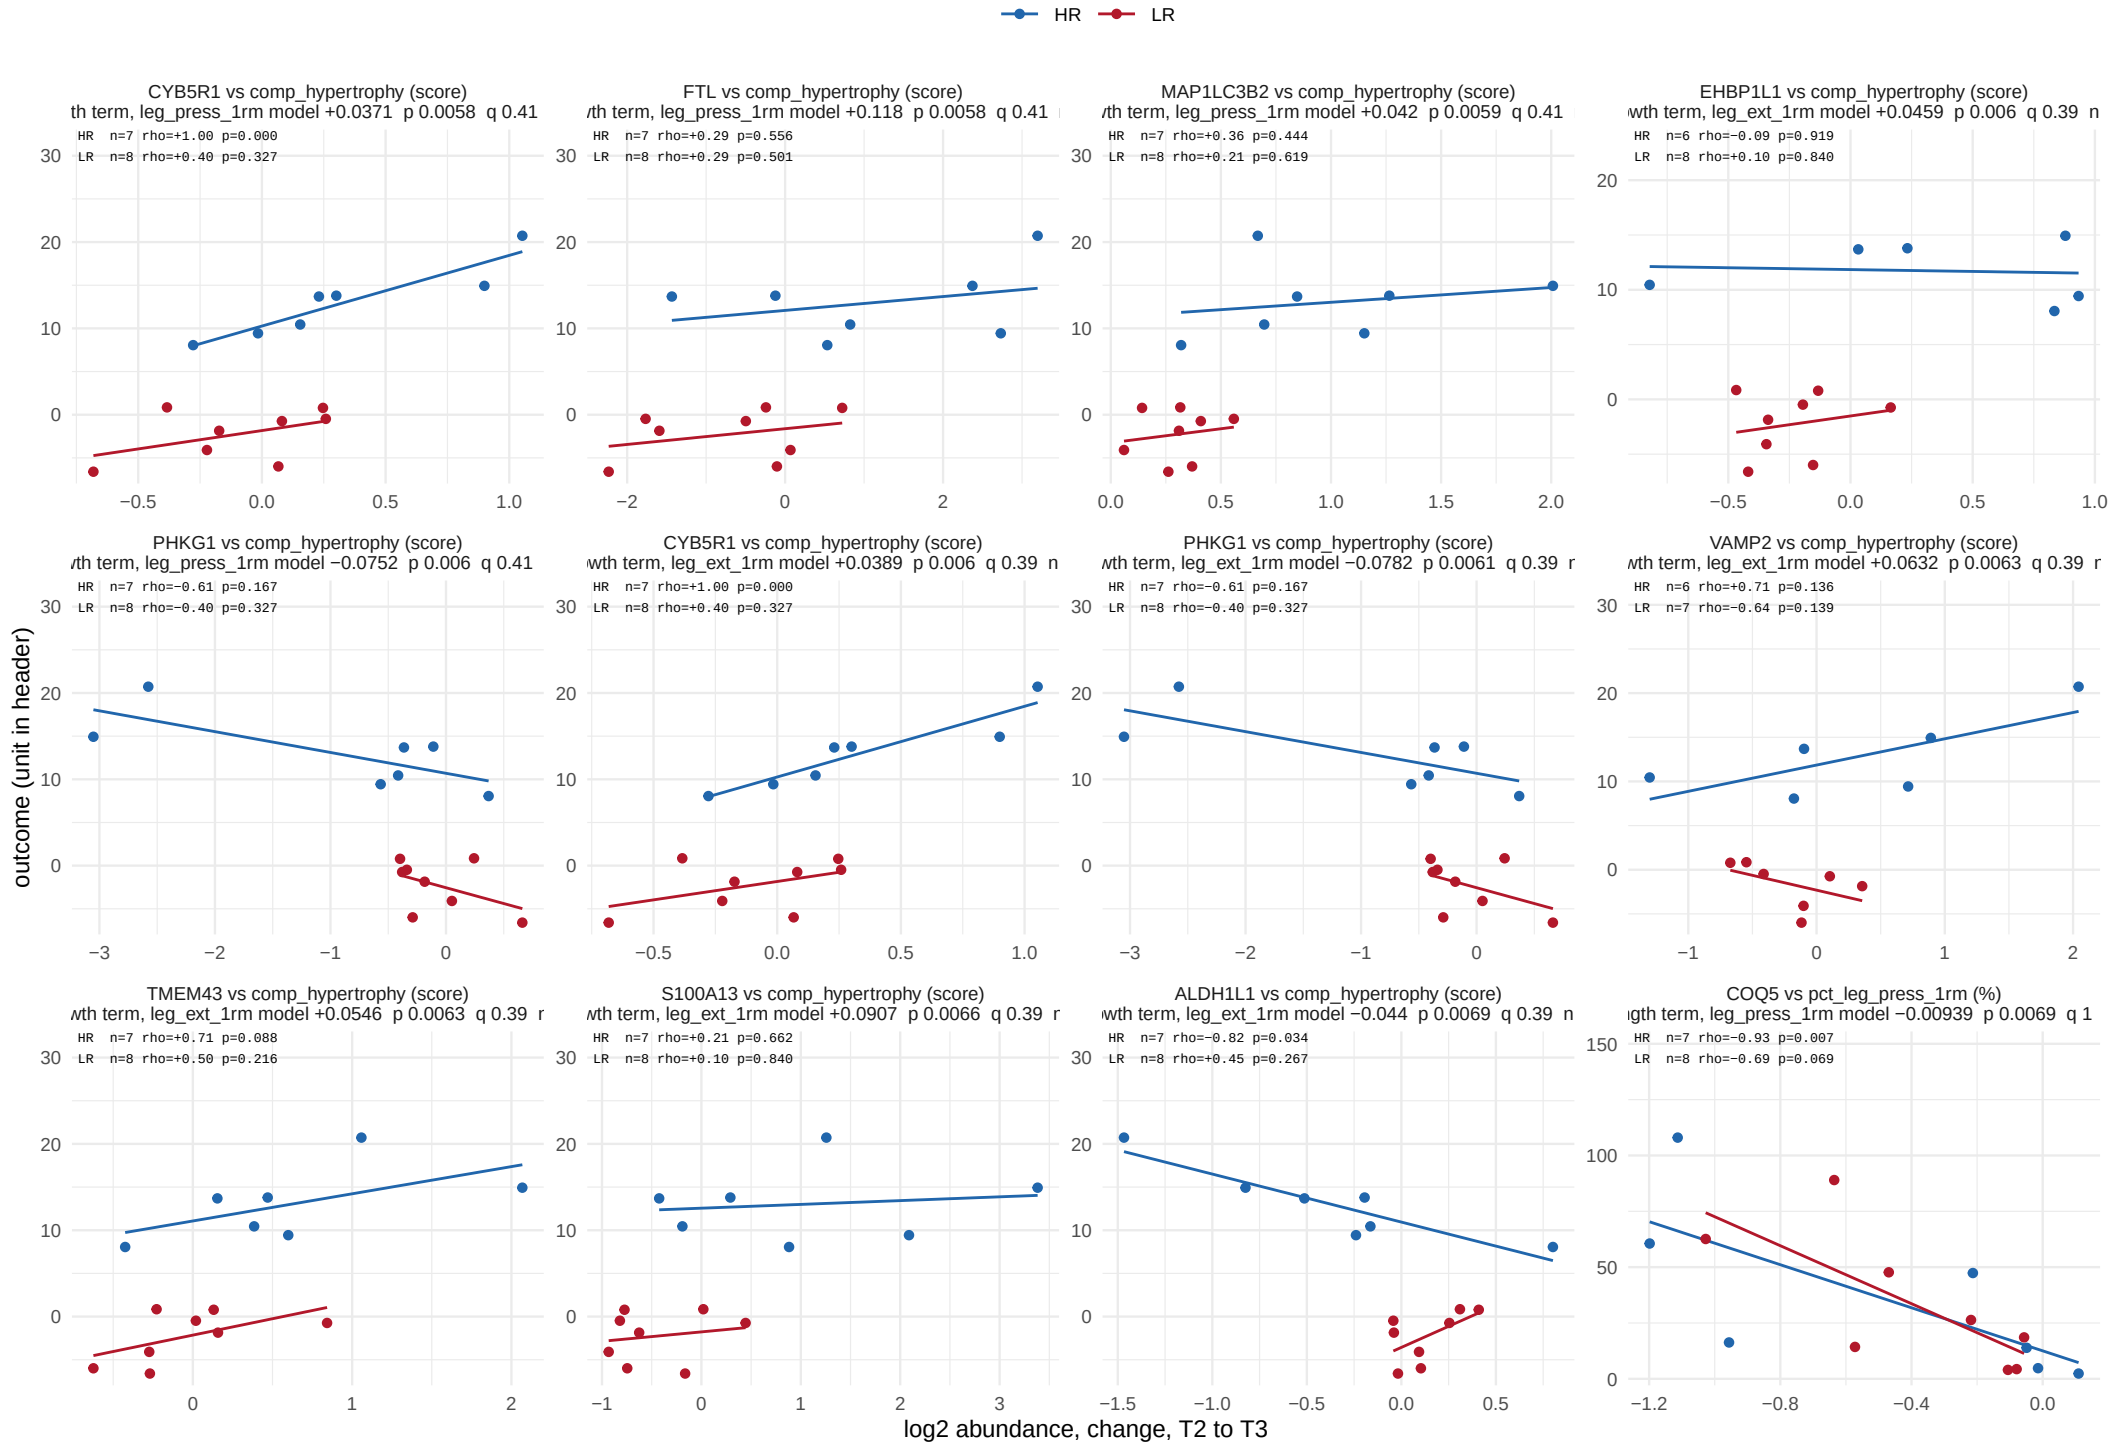

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, acute window


378 of 5806 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 5 of 32.

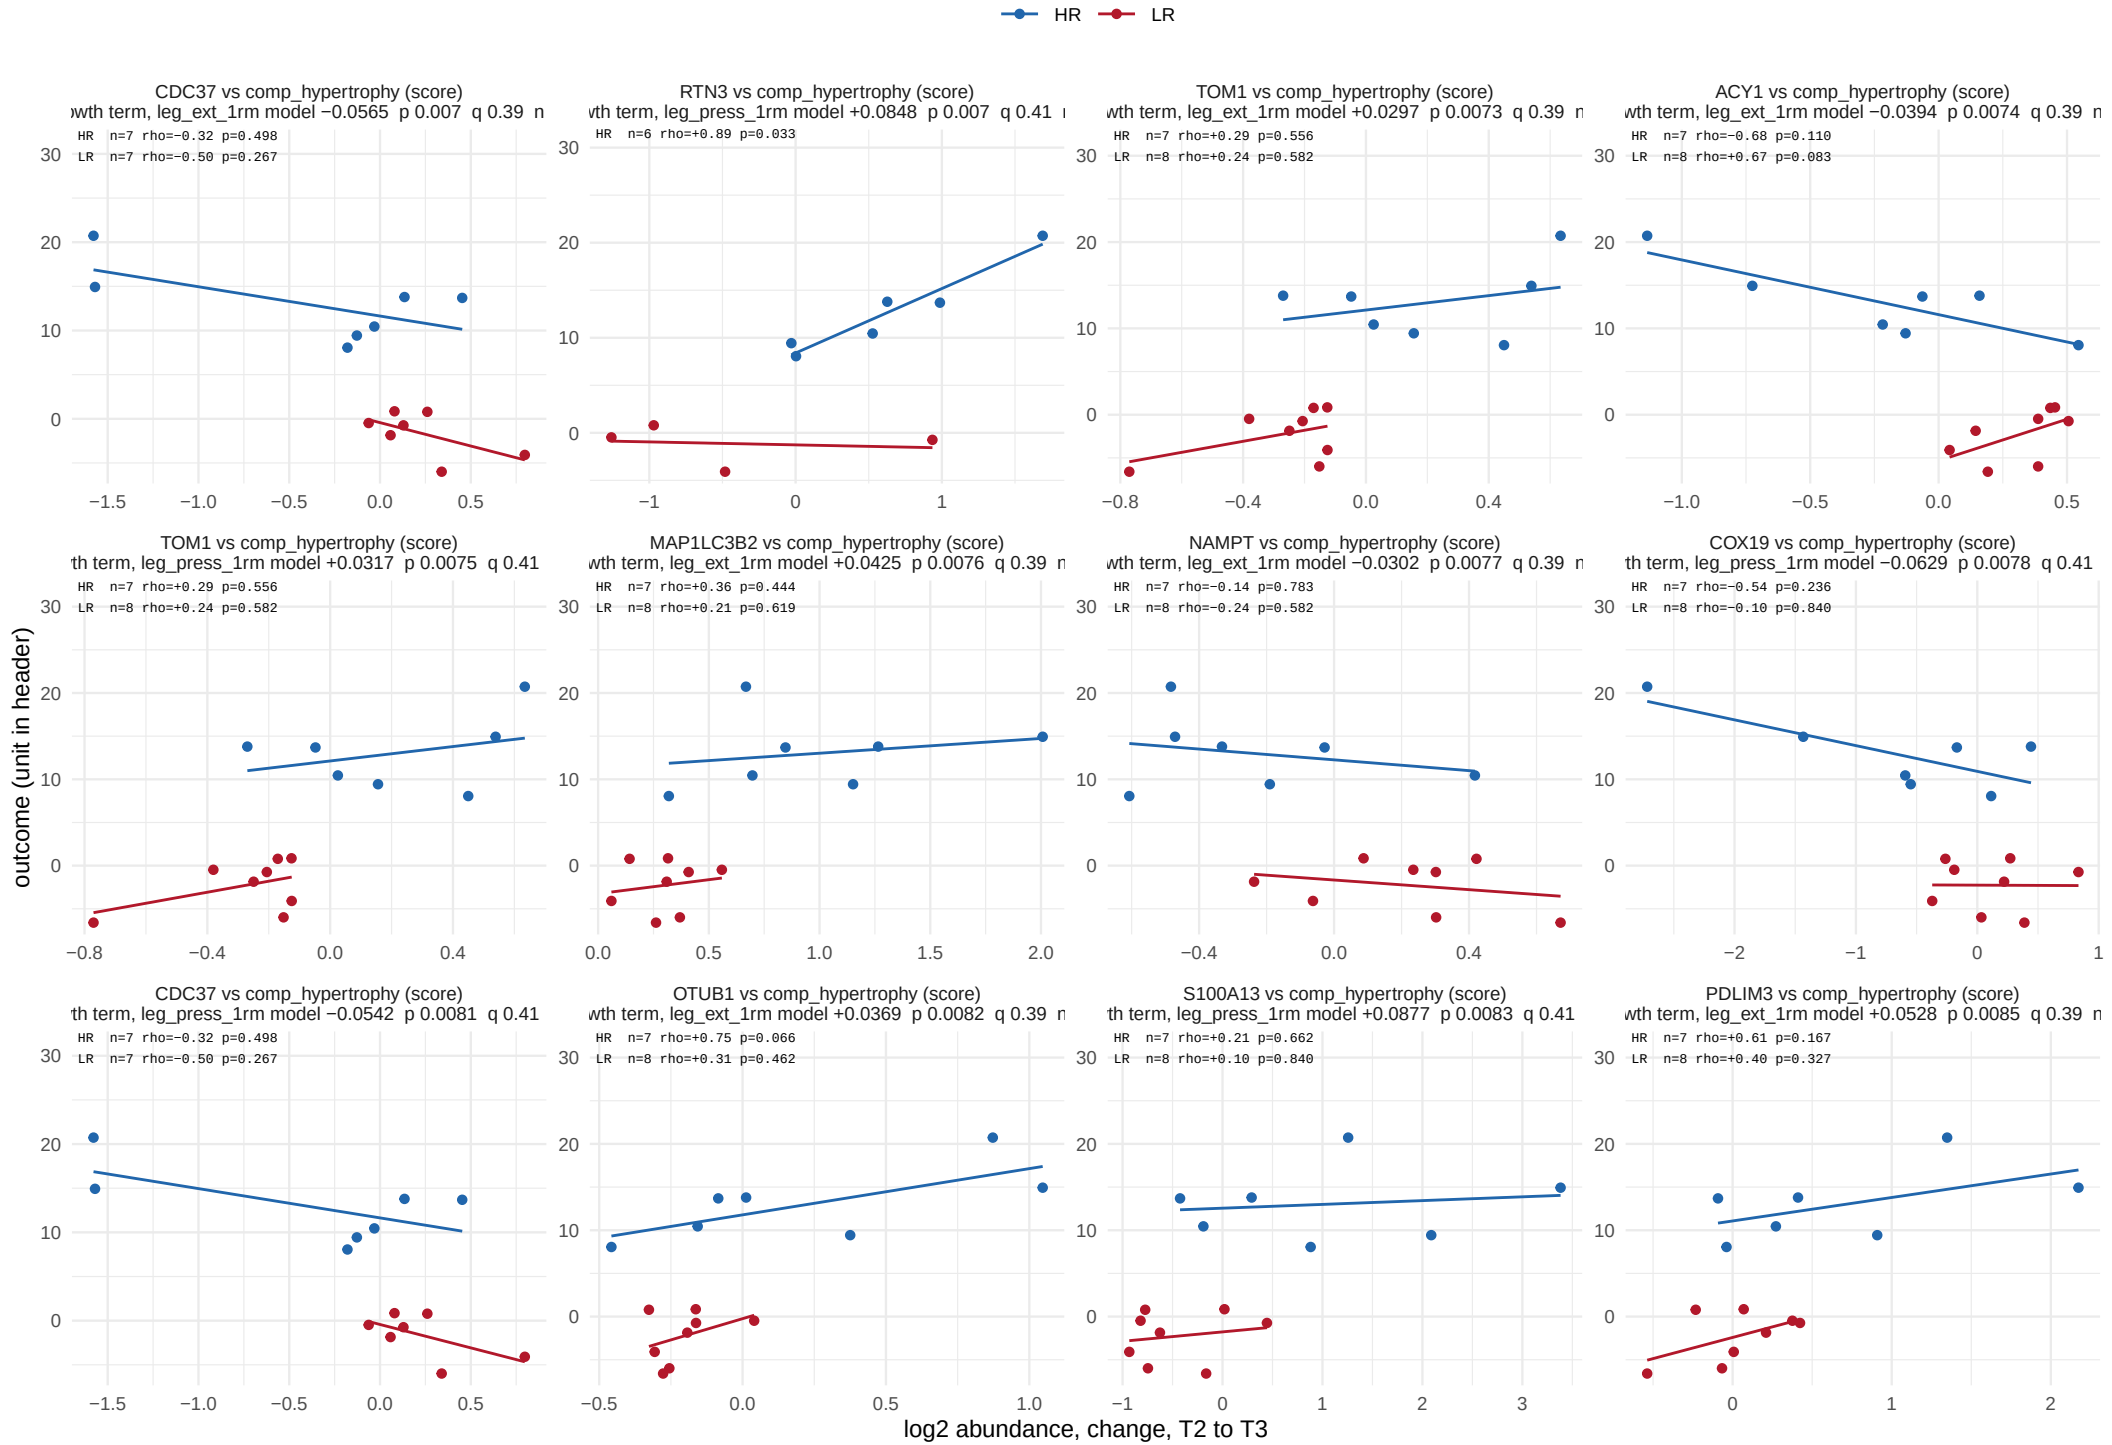

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, acute window


378 of 5806 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 6 of 32.

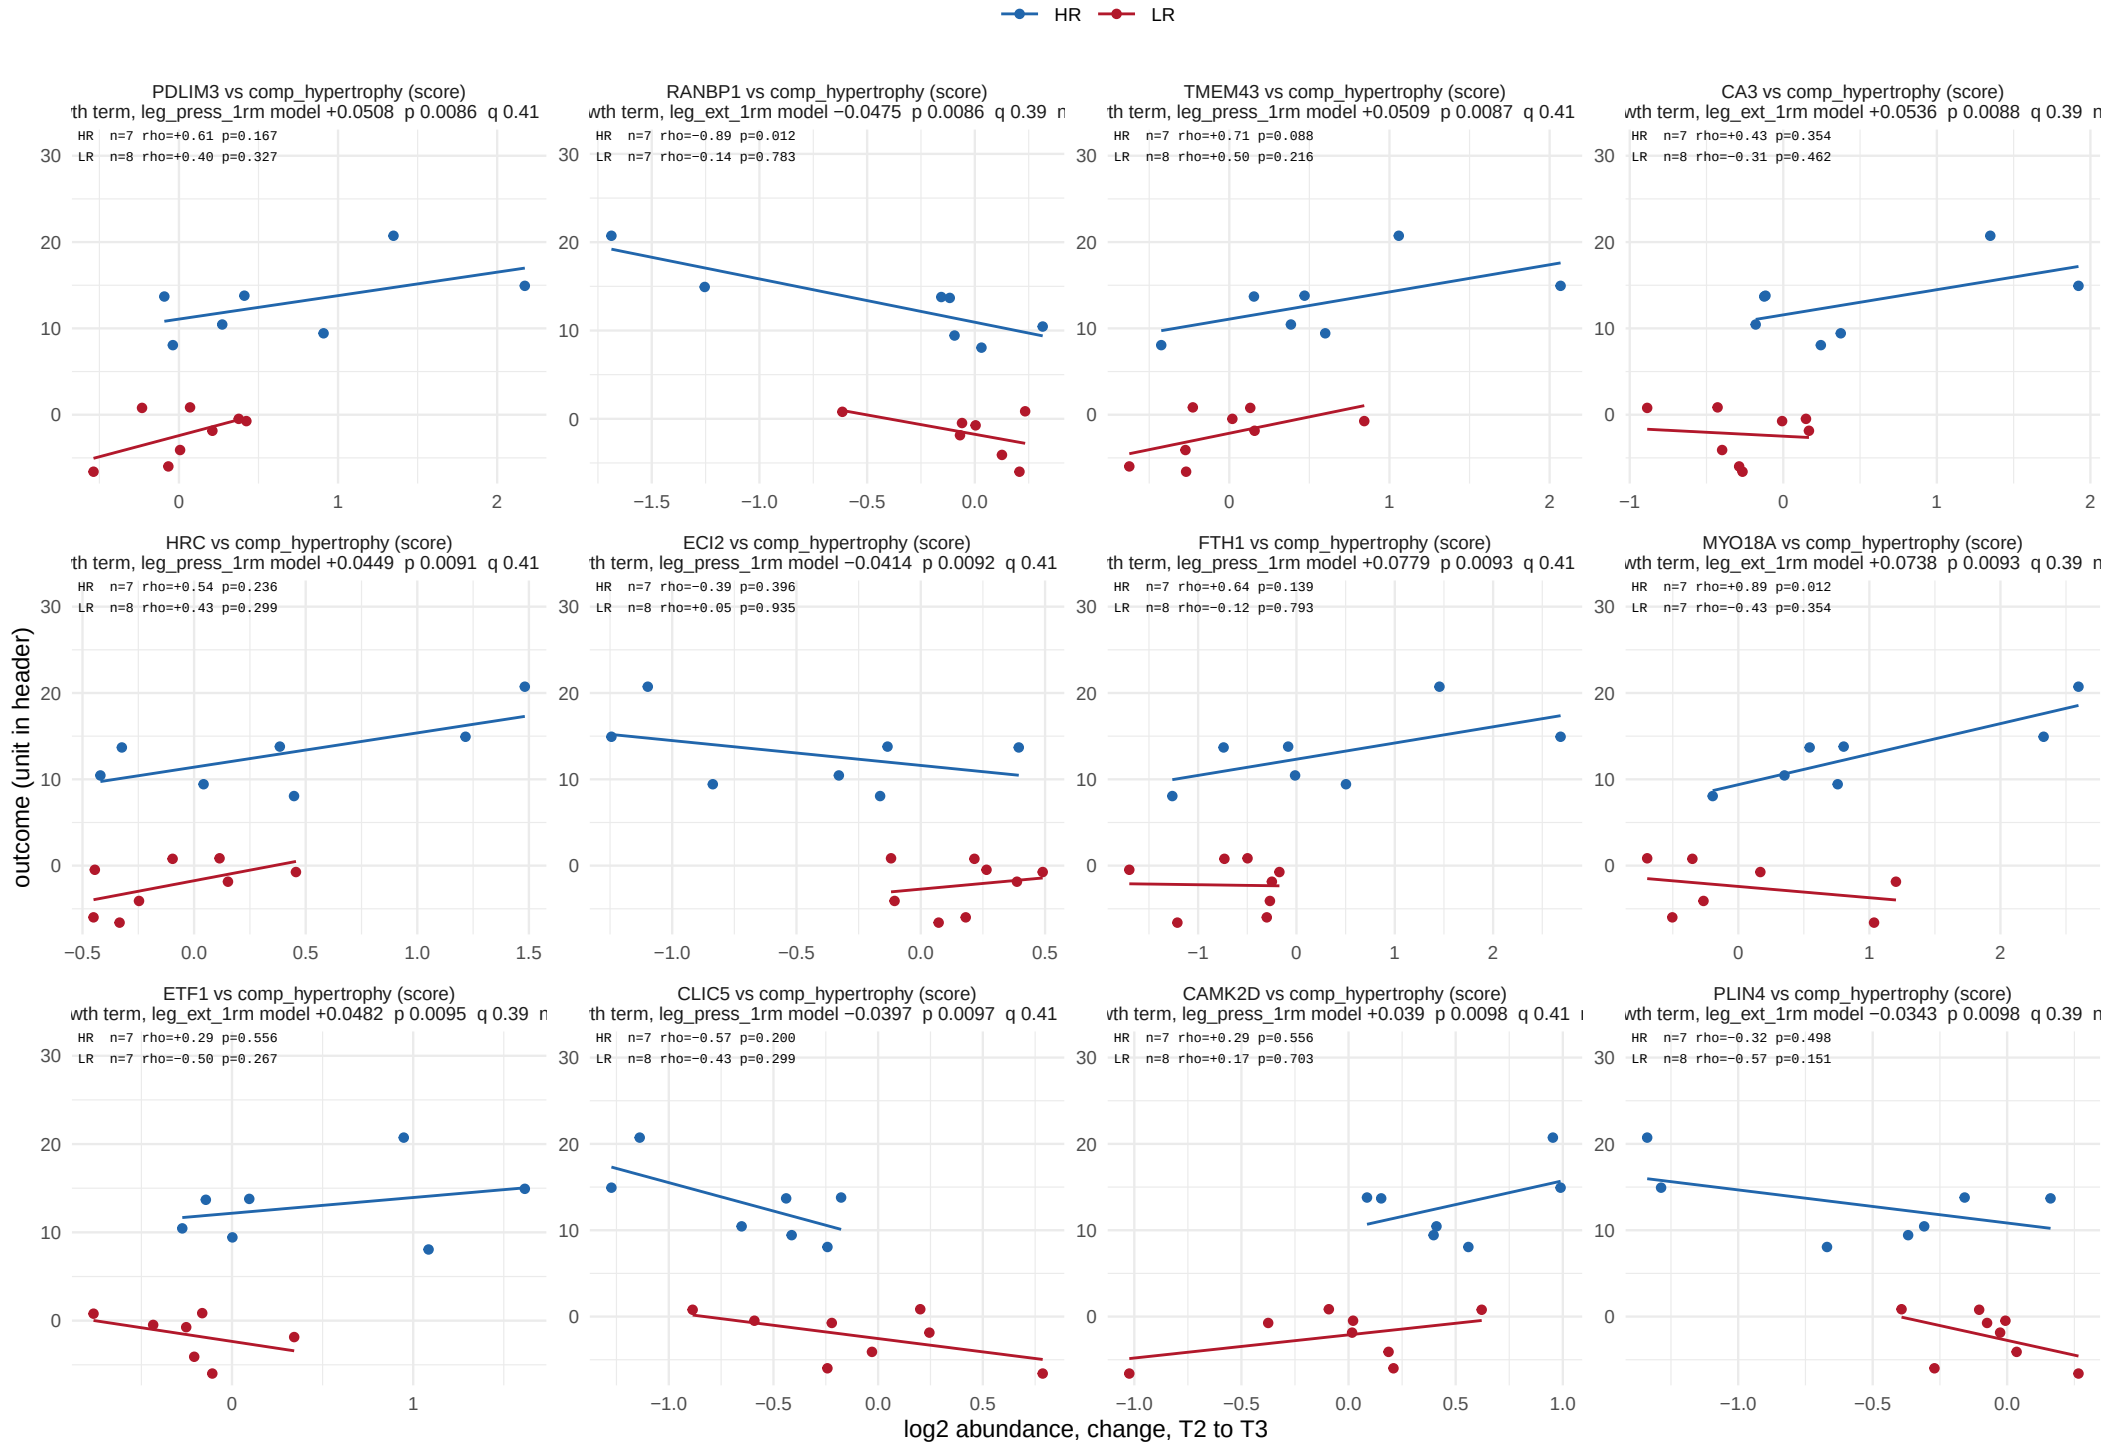

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.


Two predictor, acute window

378 of 5806 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 7 of 32.

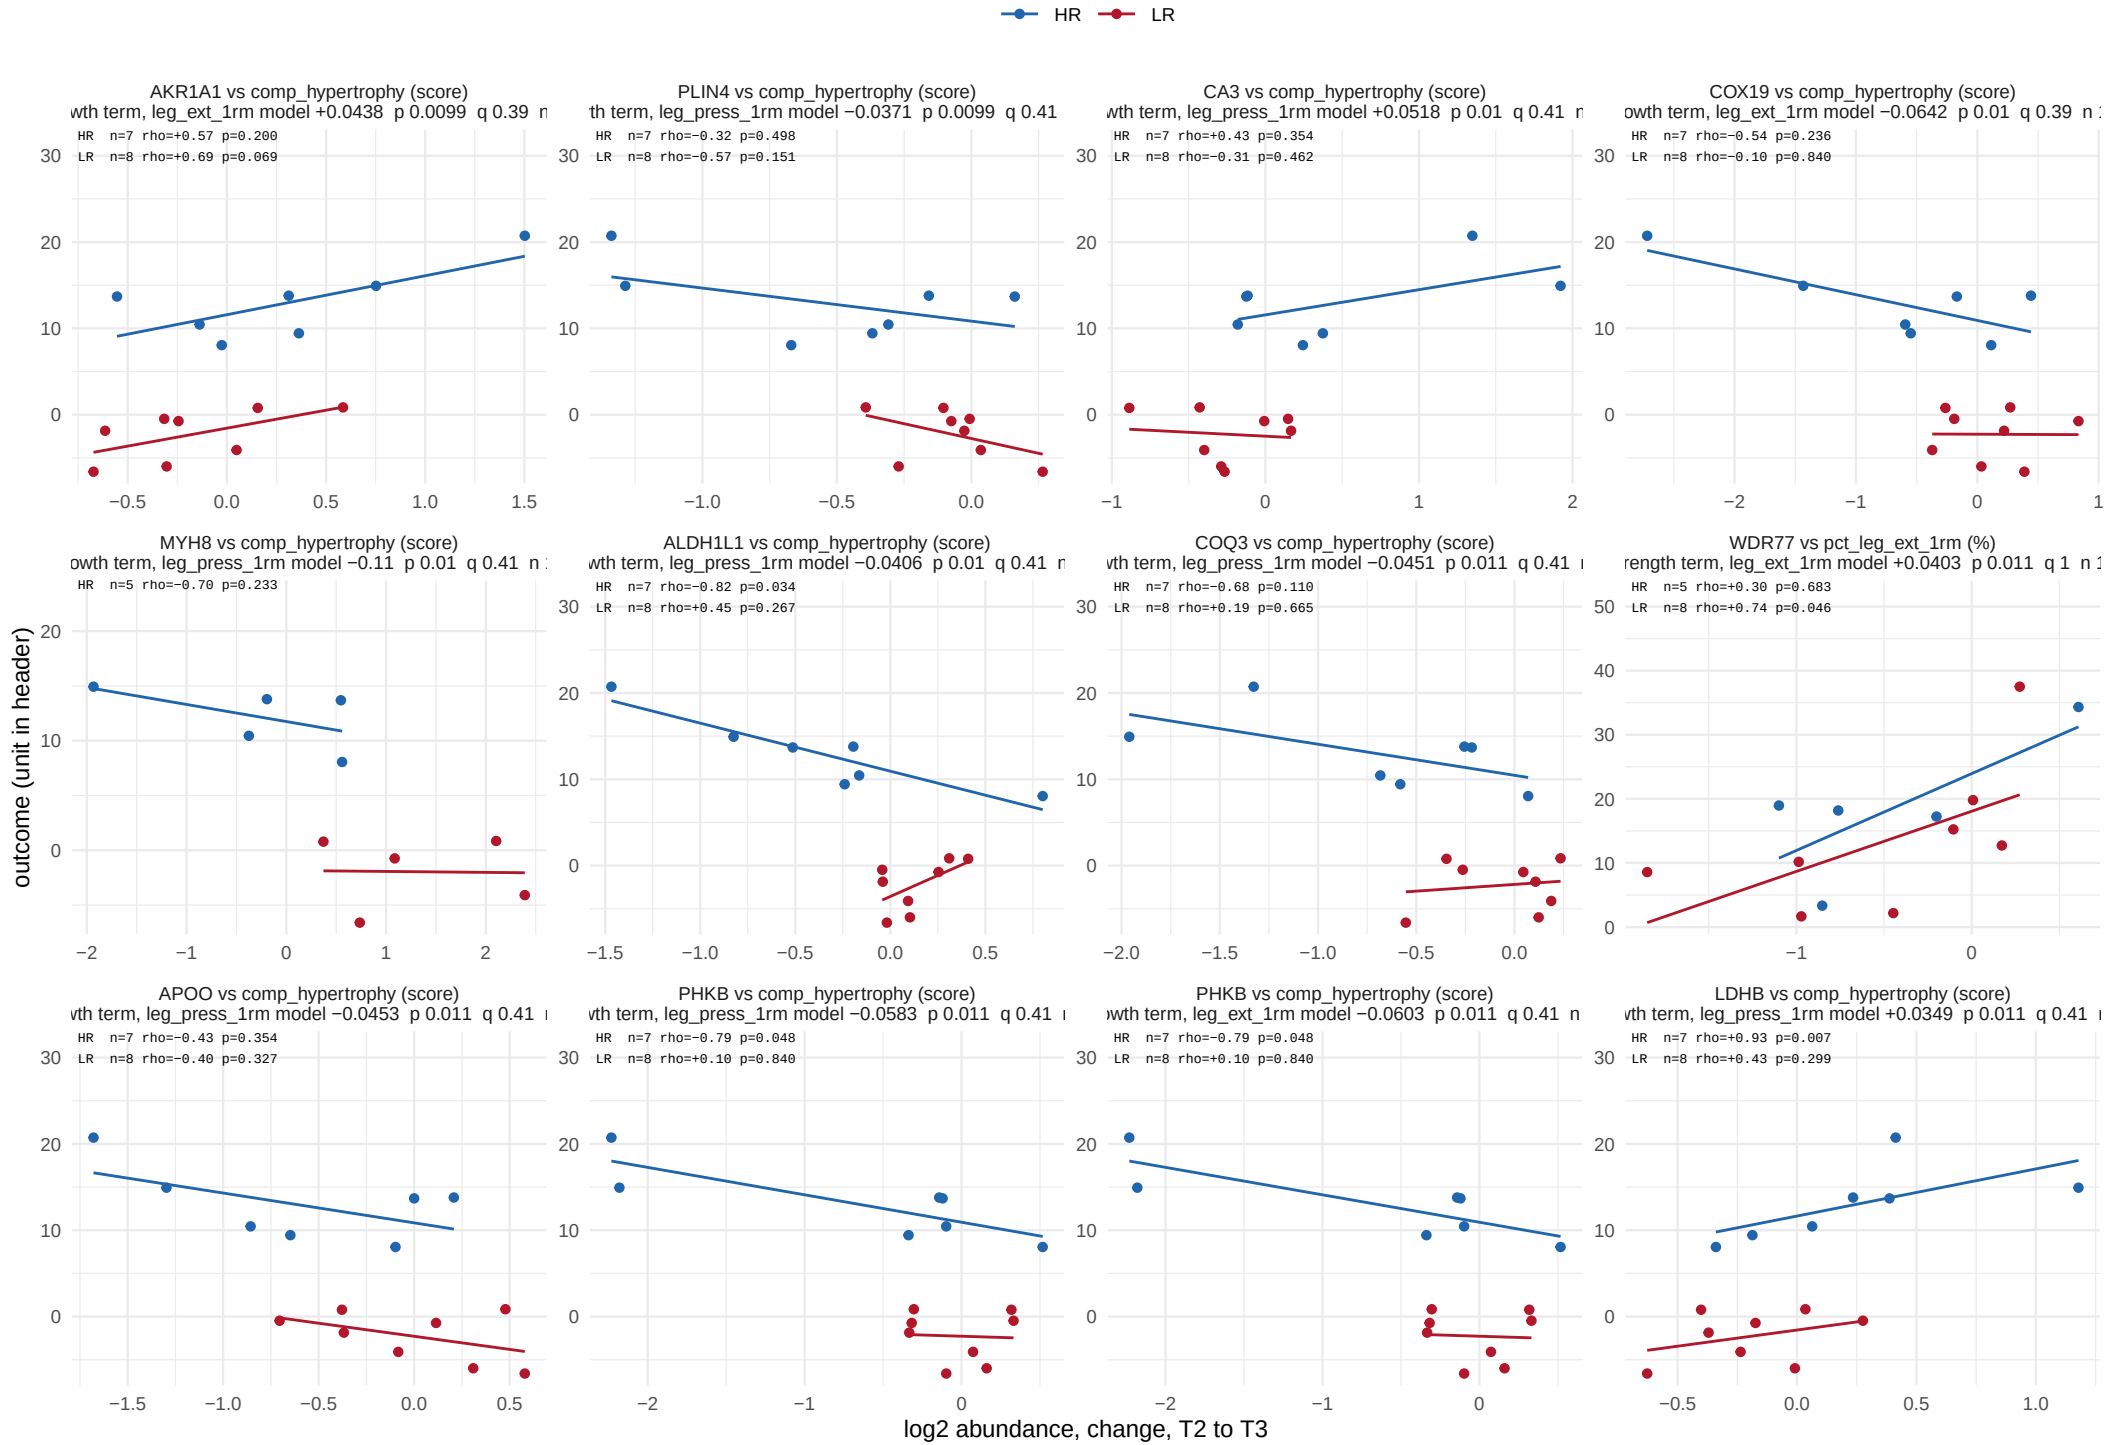

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.


Two predictor, acute window

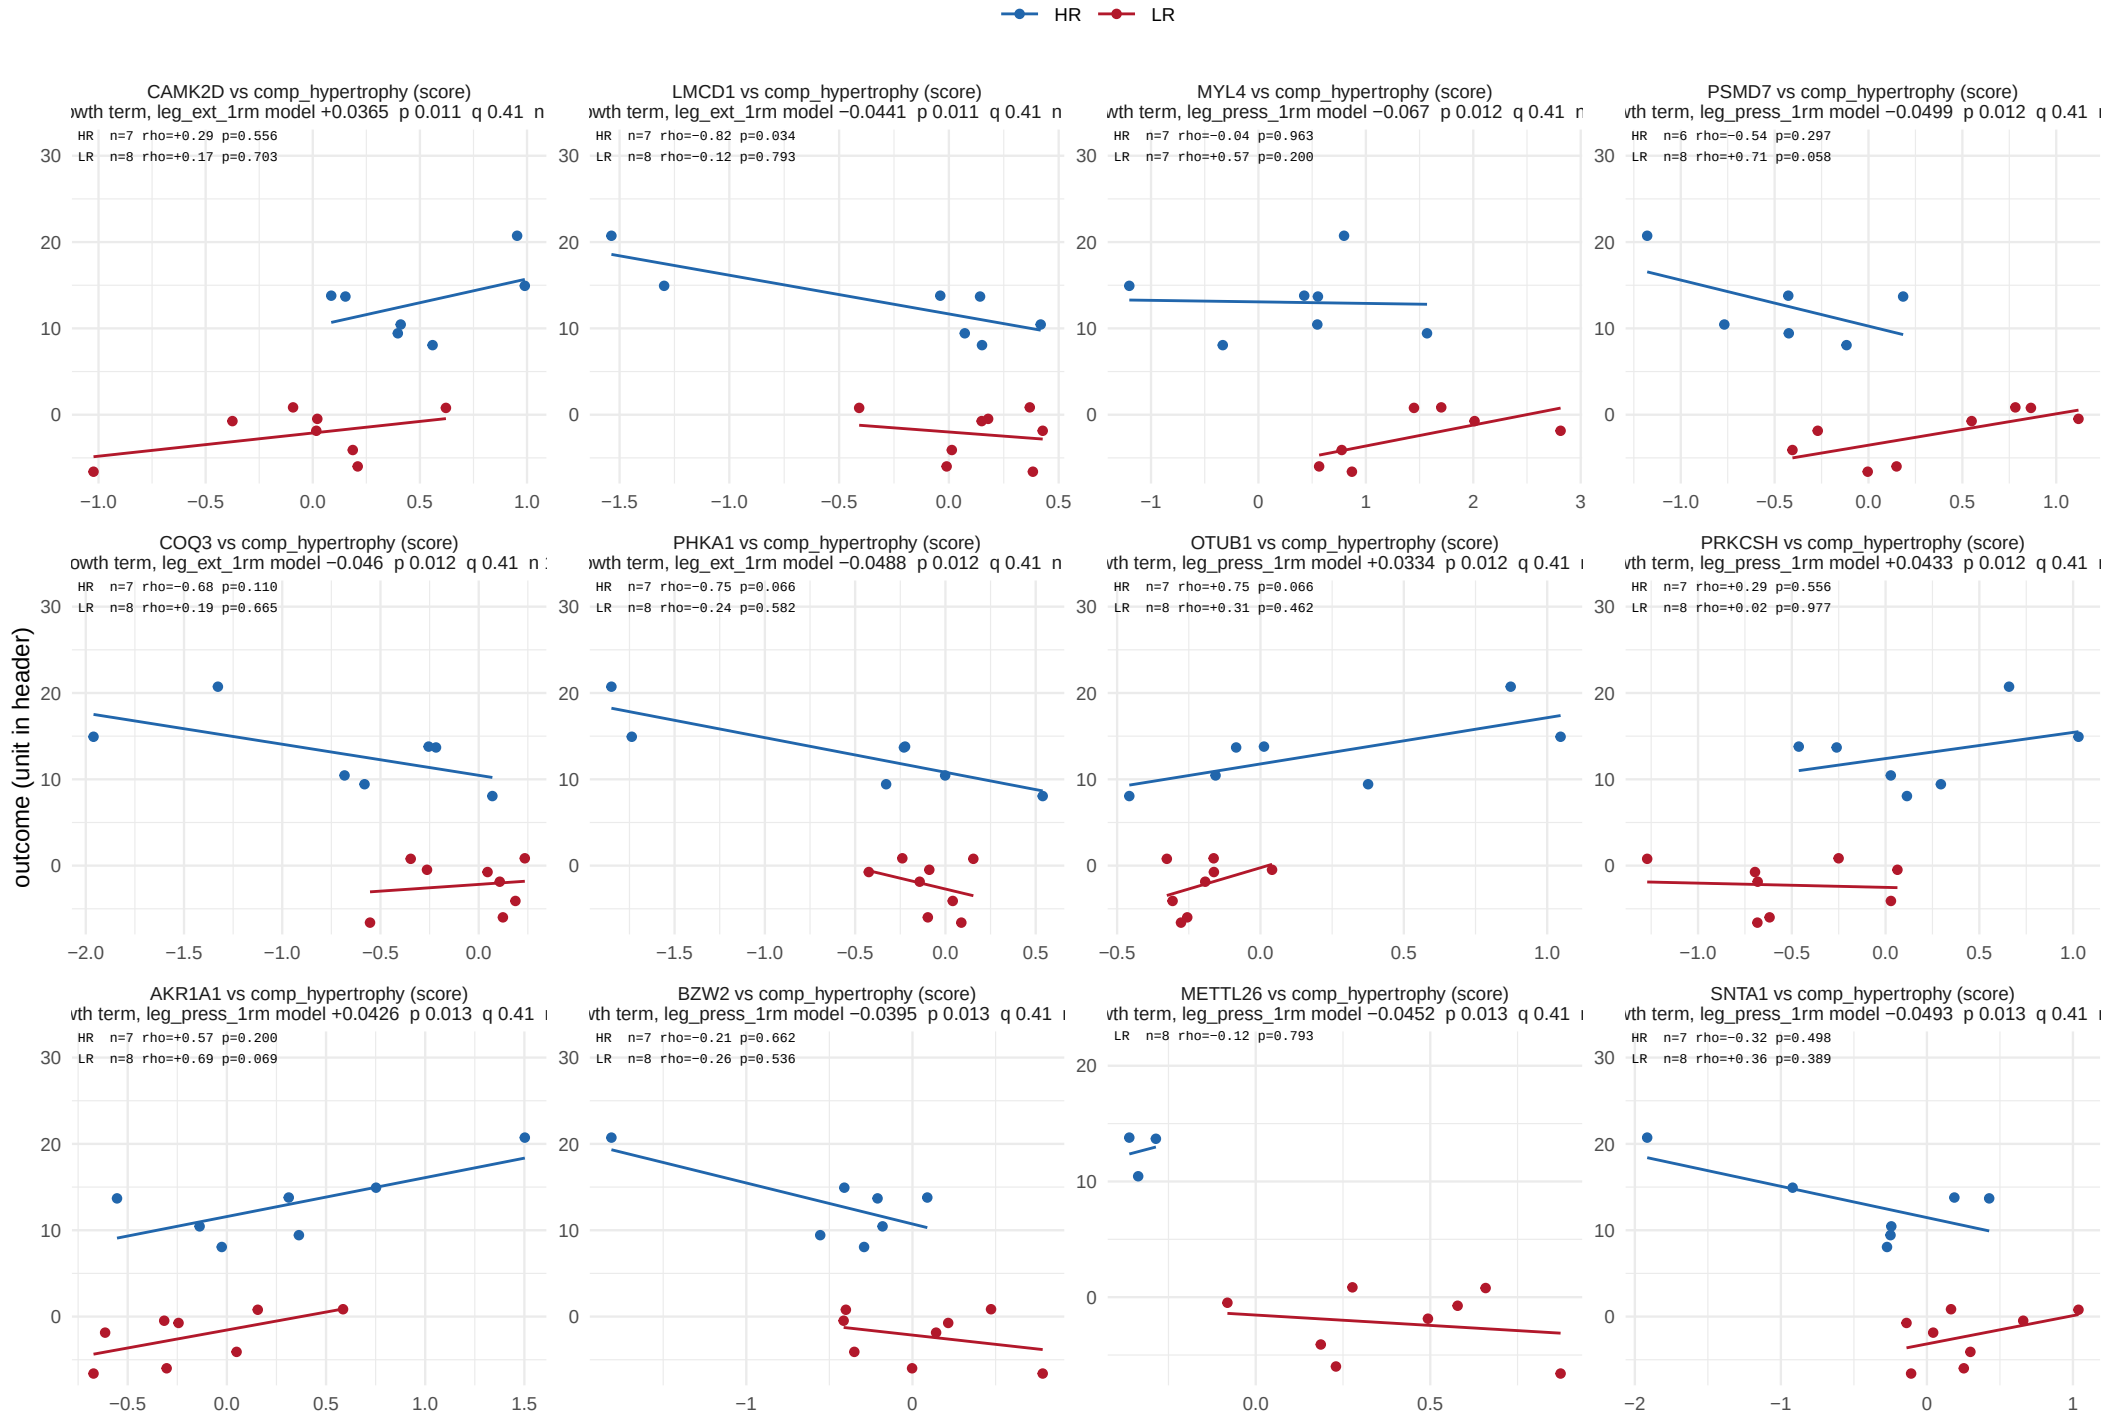

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, acute window


378 of 5806 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 9 of 32.

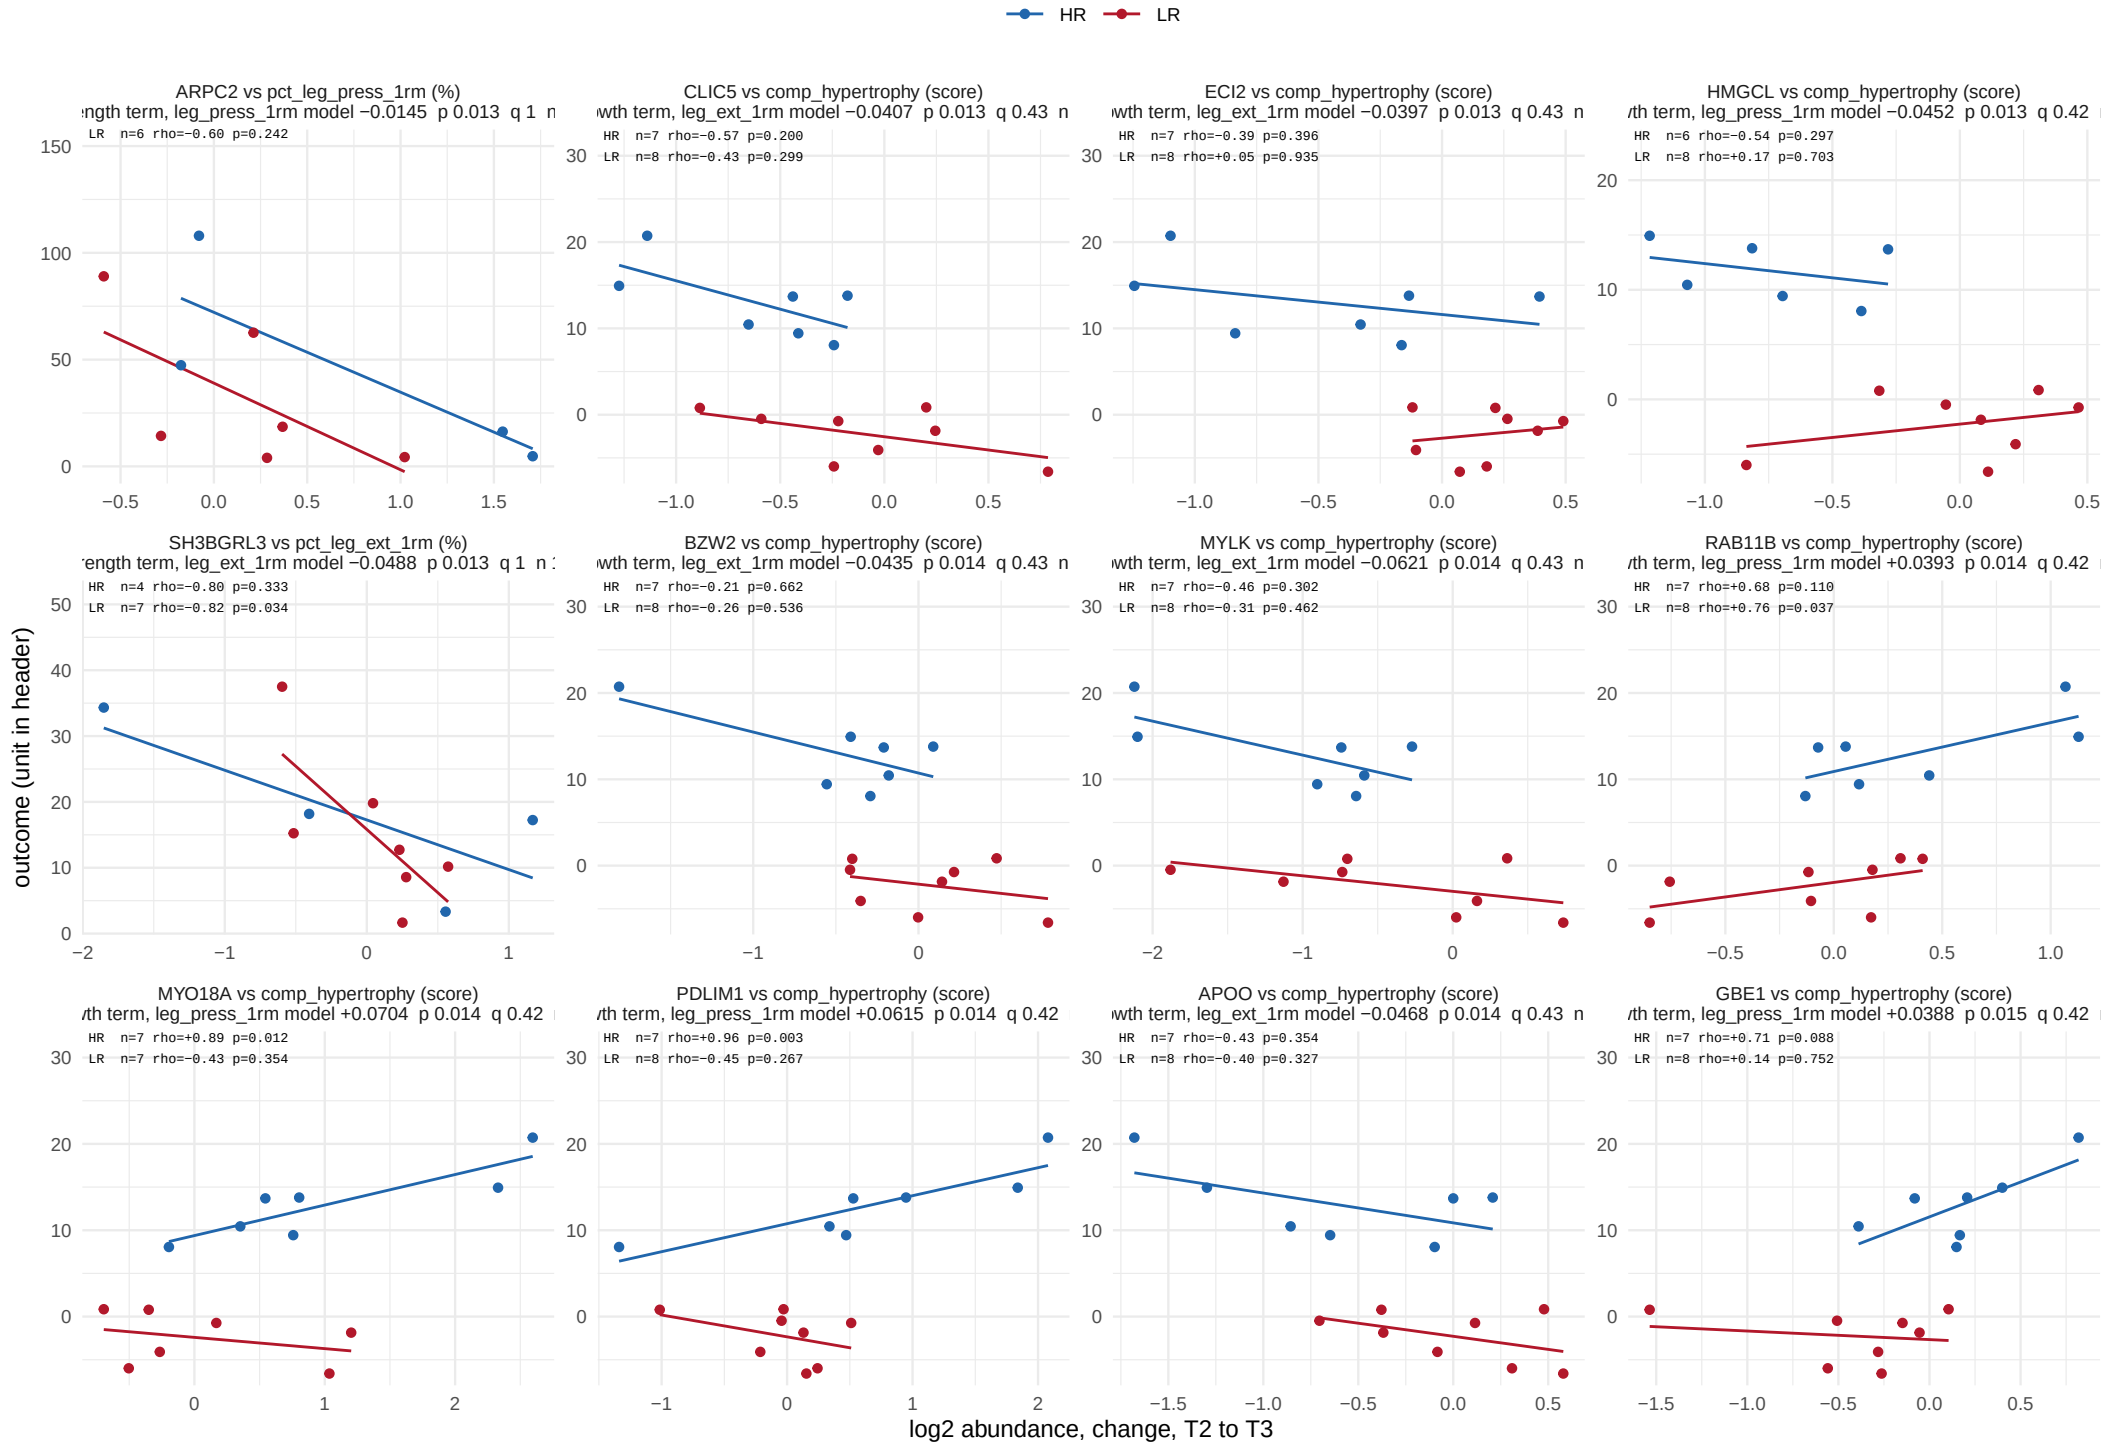

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.


Two predictor, acute window

378 of 5806 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 10 of 32.

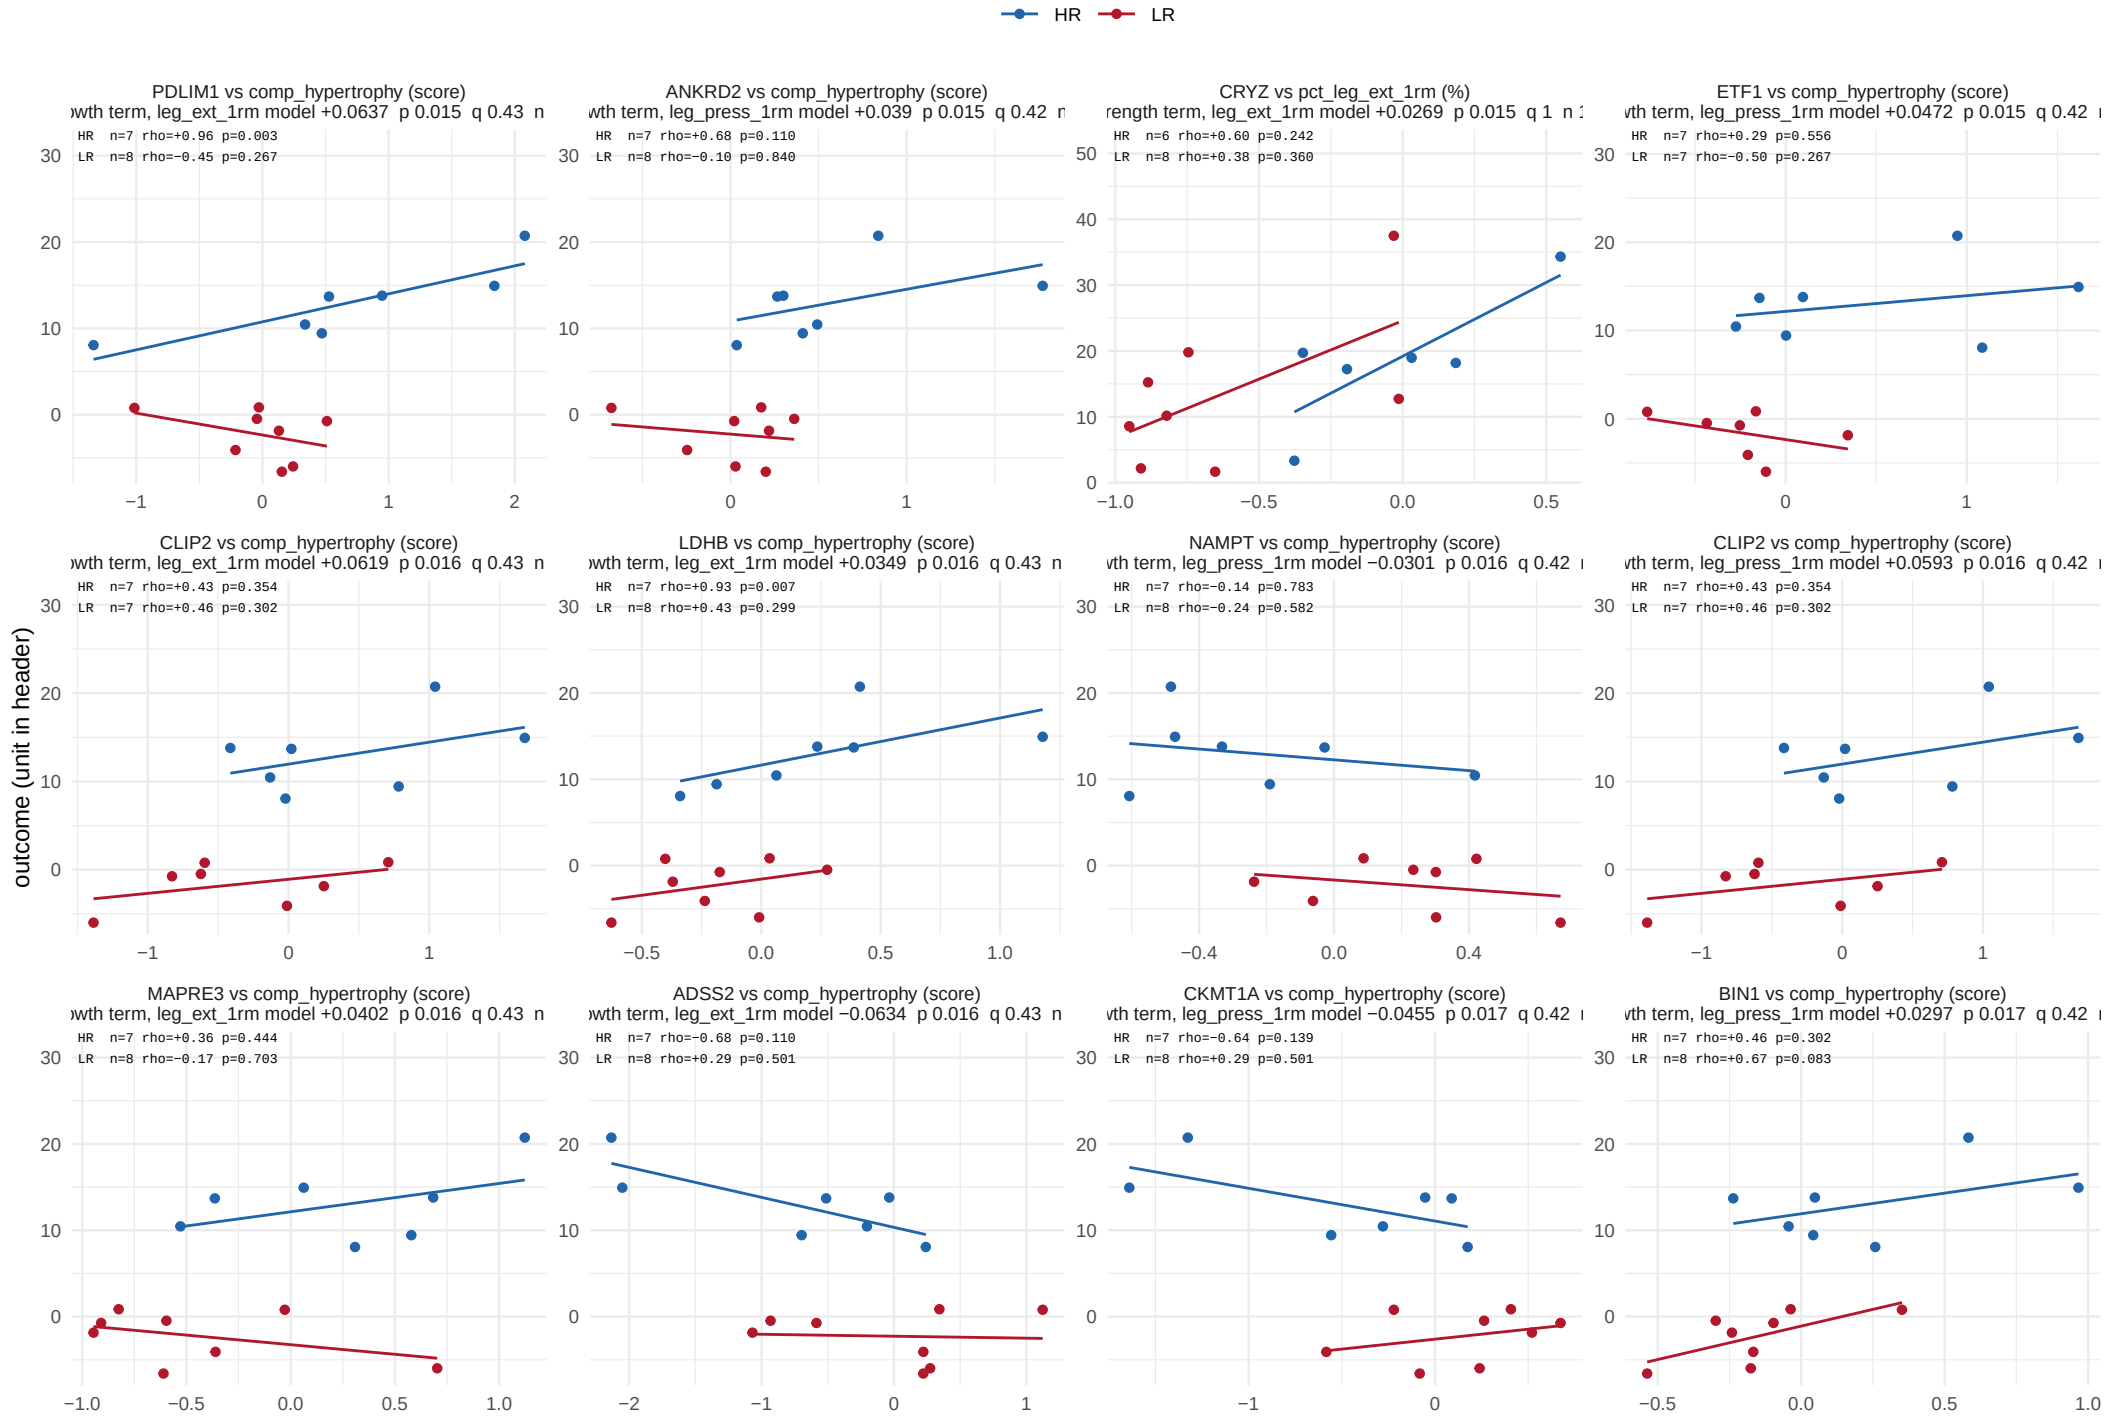


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, acute window

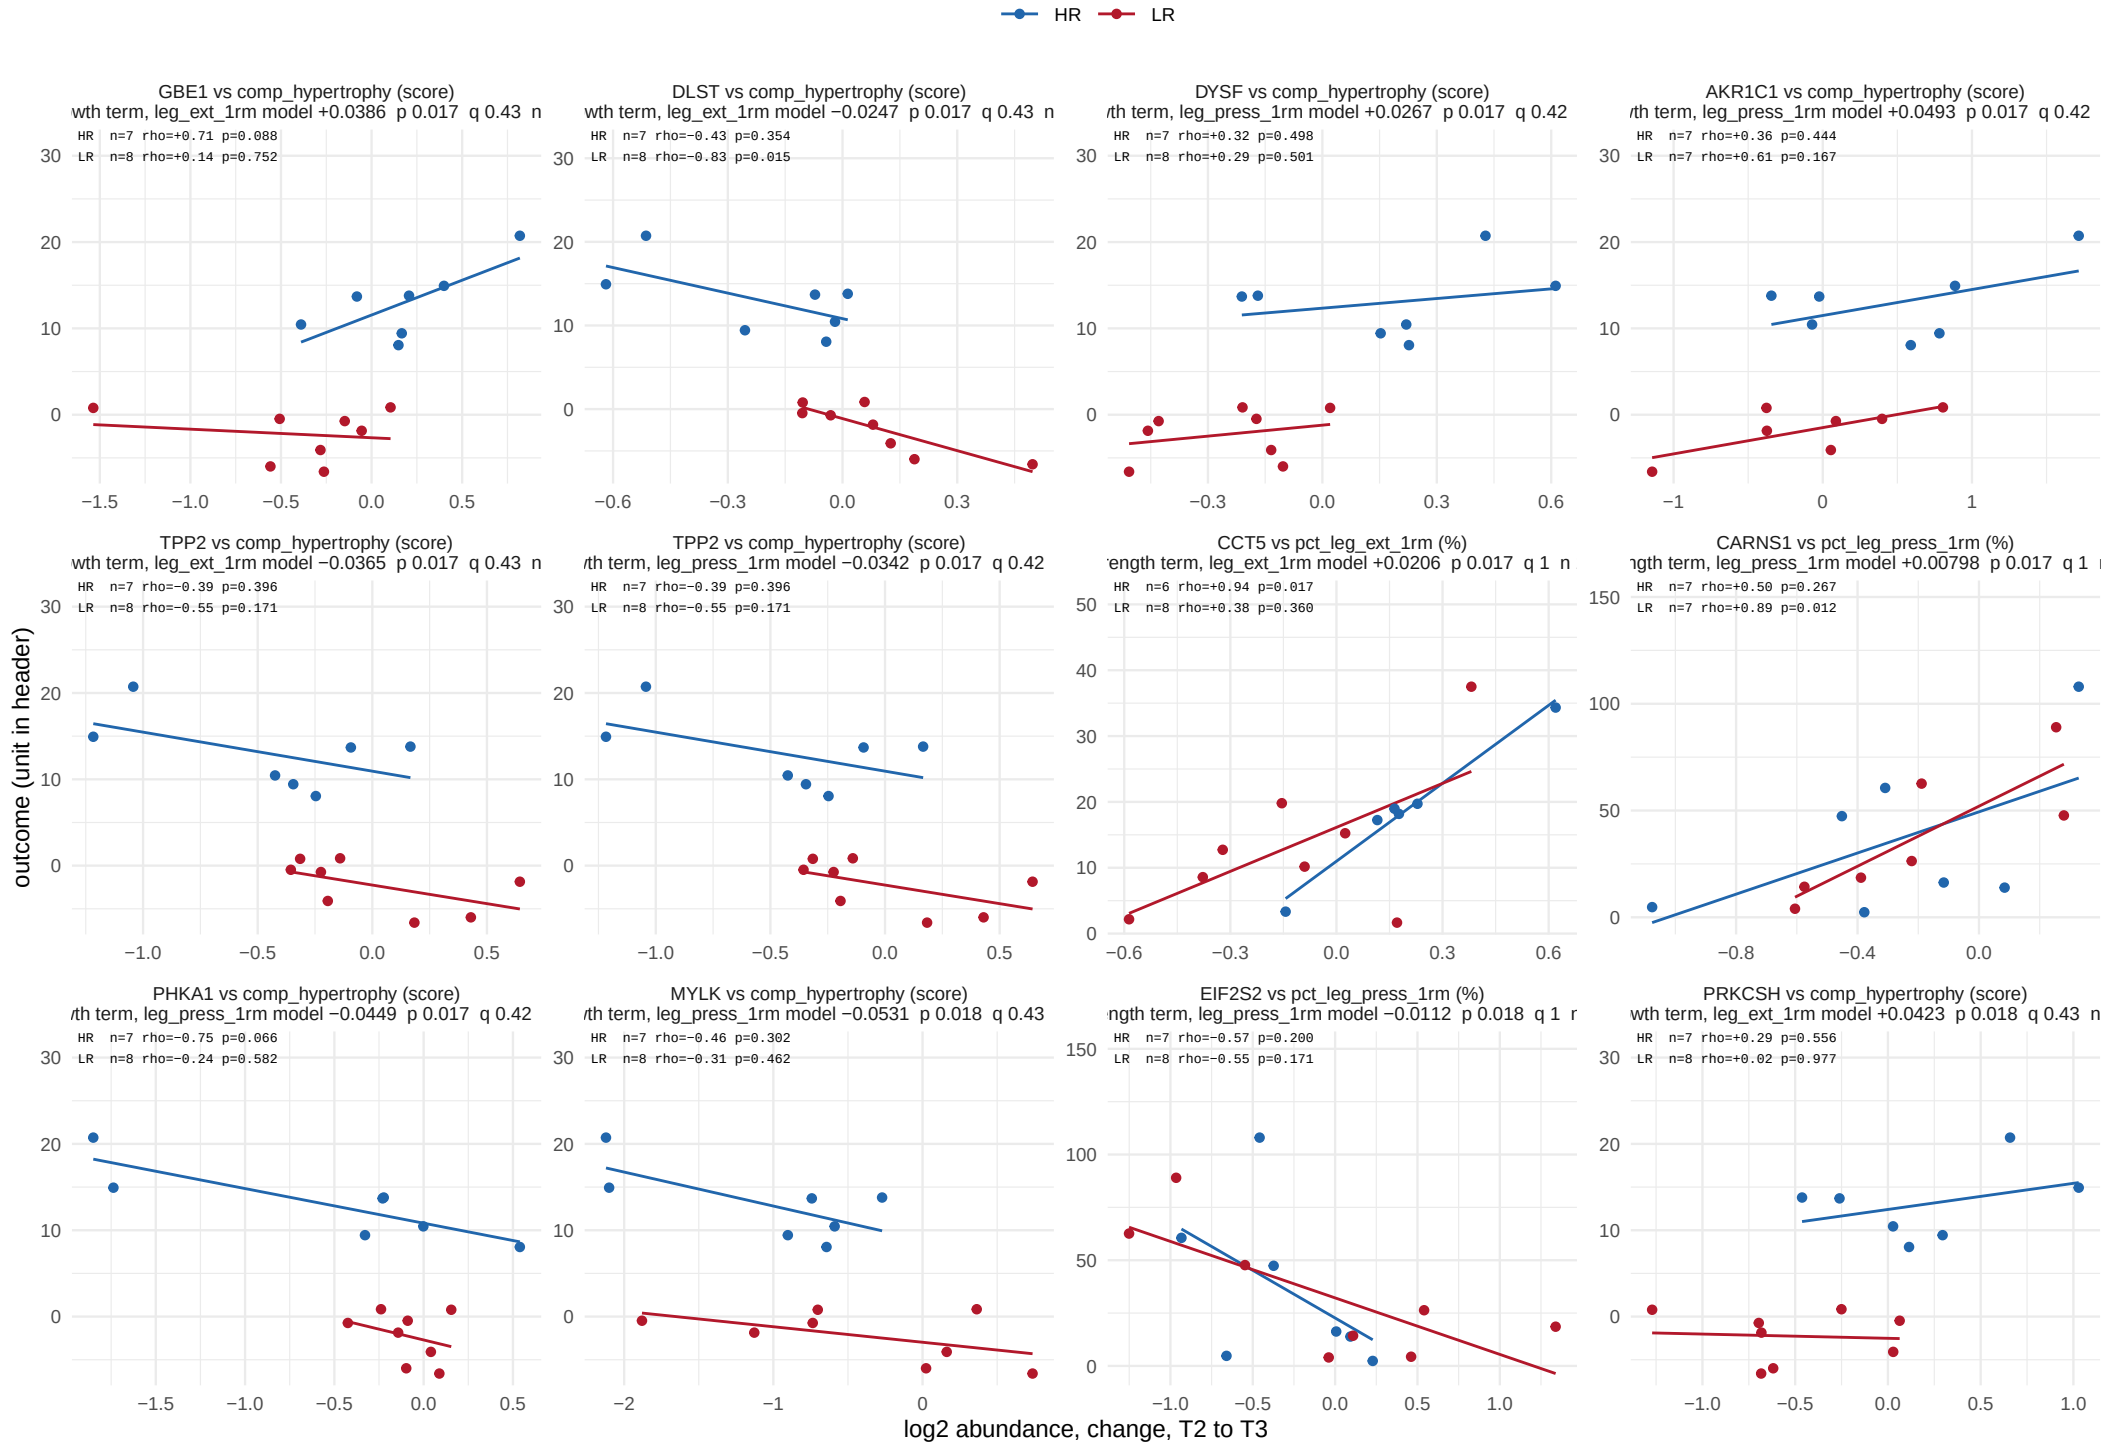


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, acute window

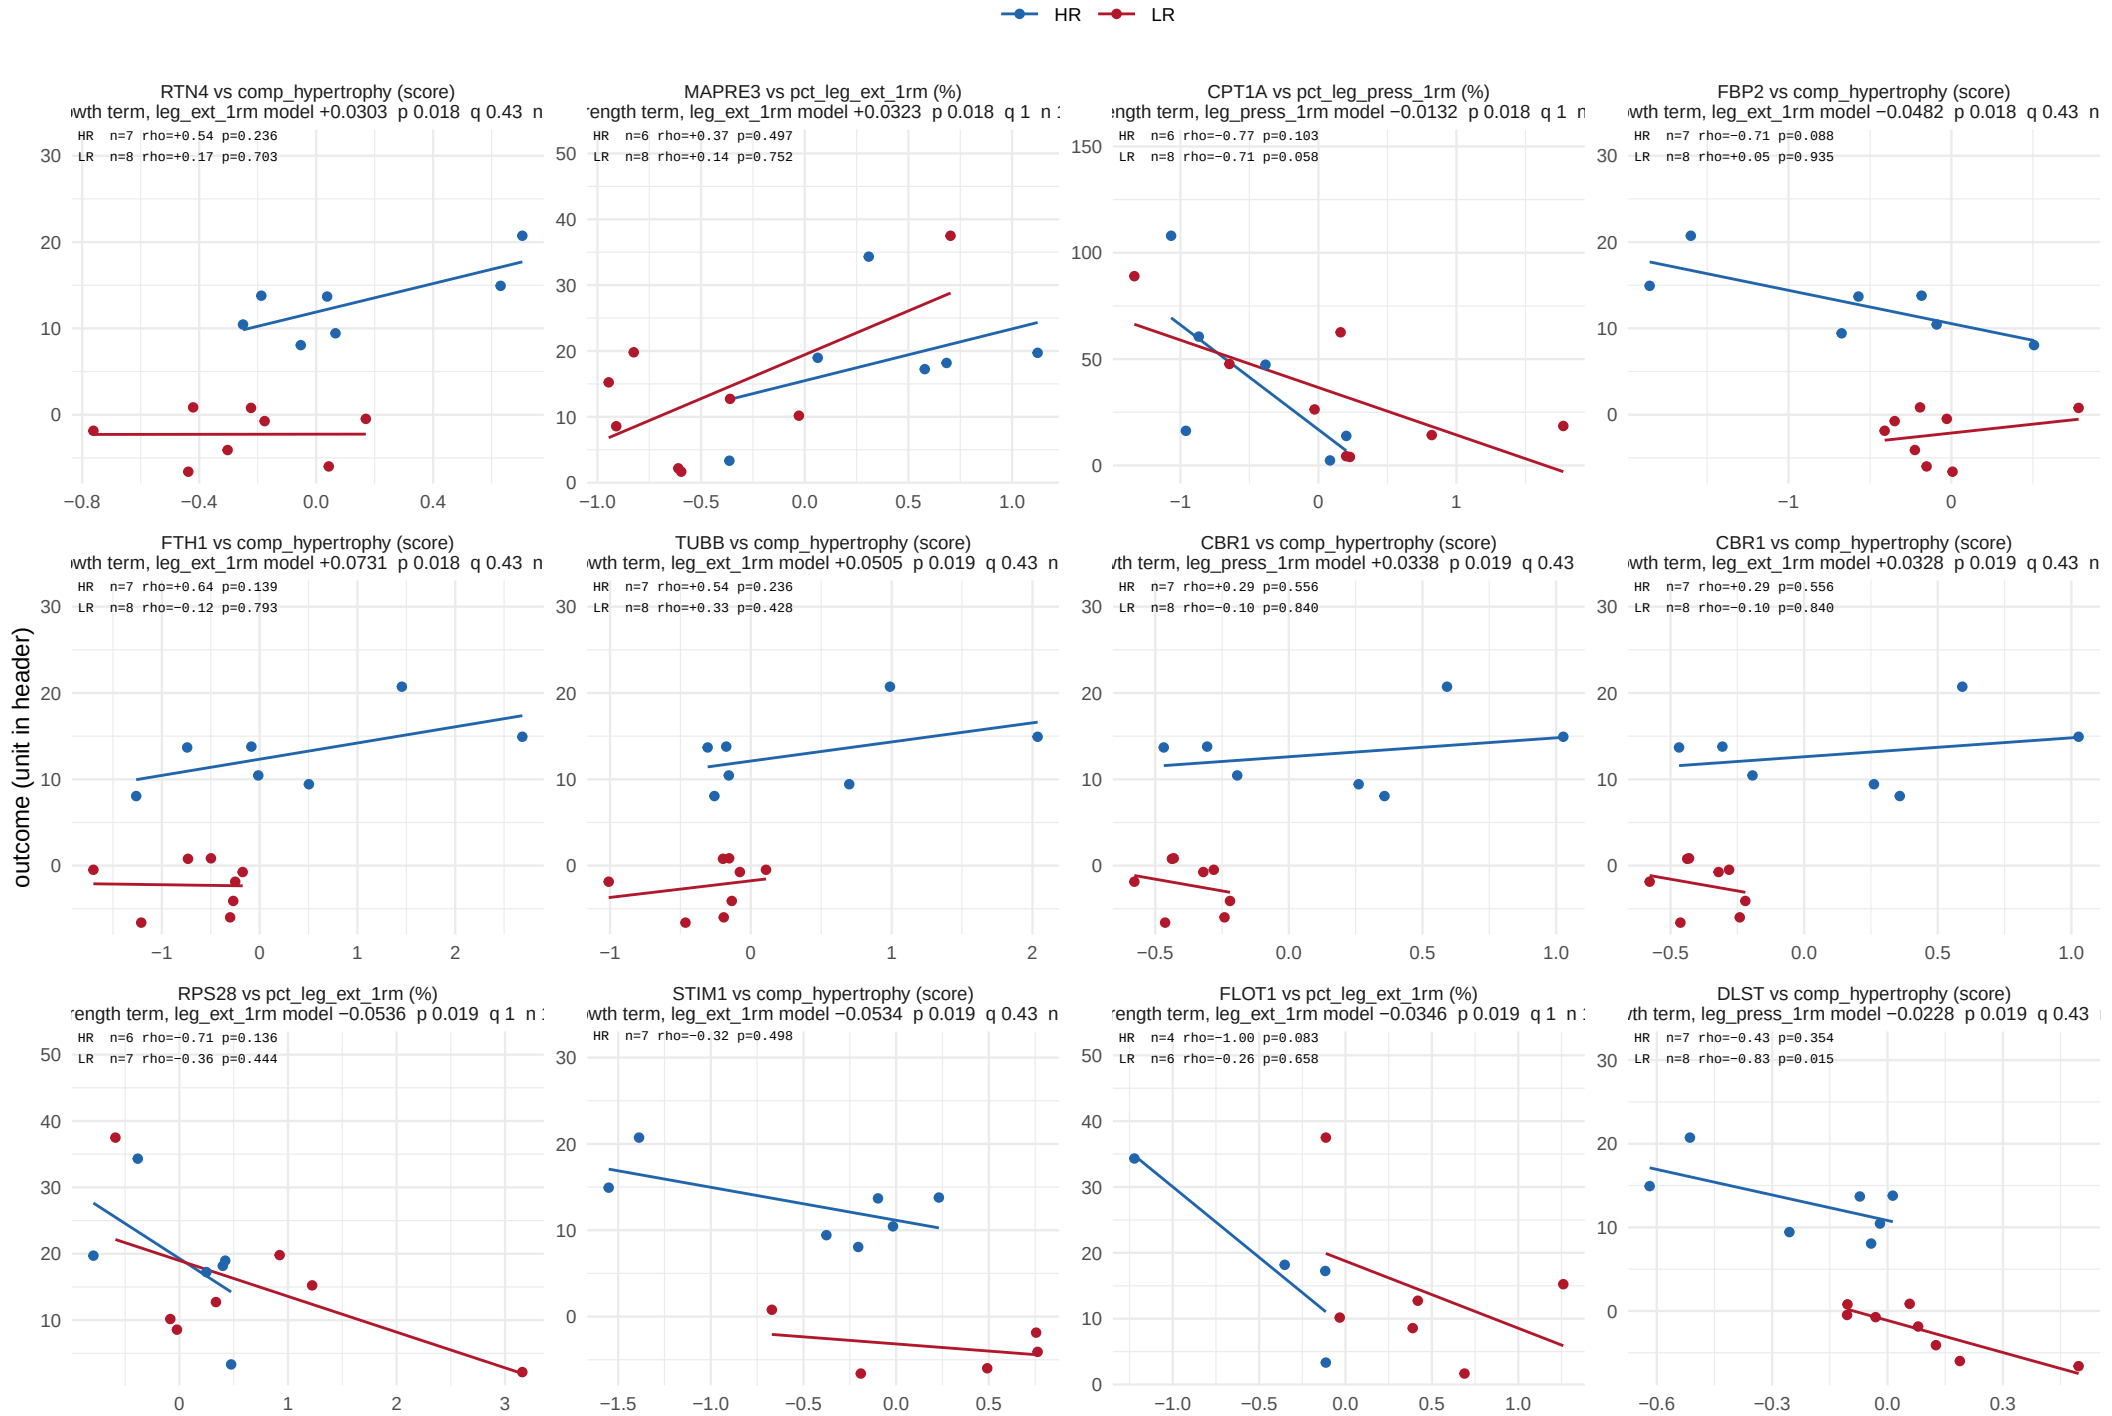


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, acute window

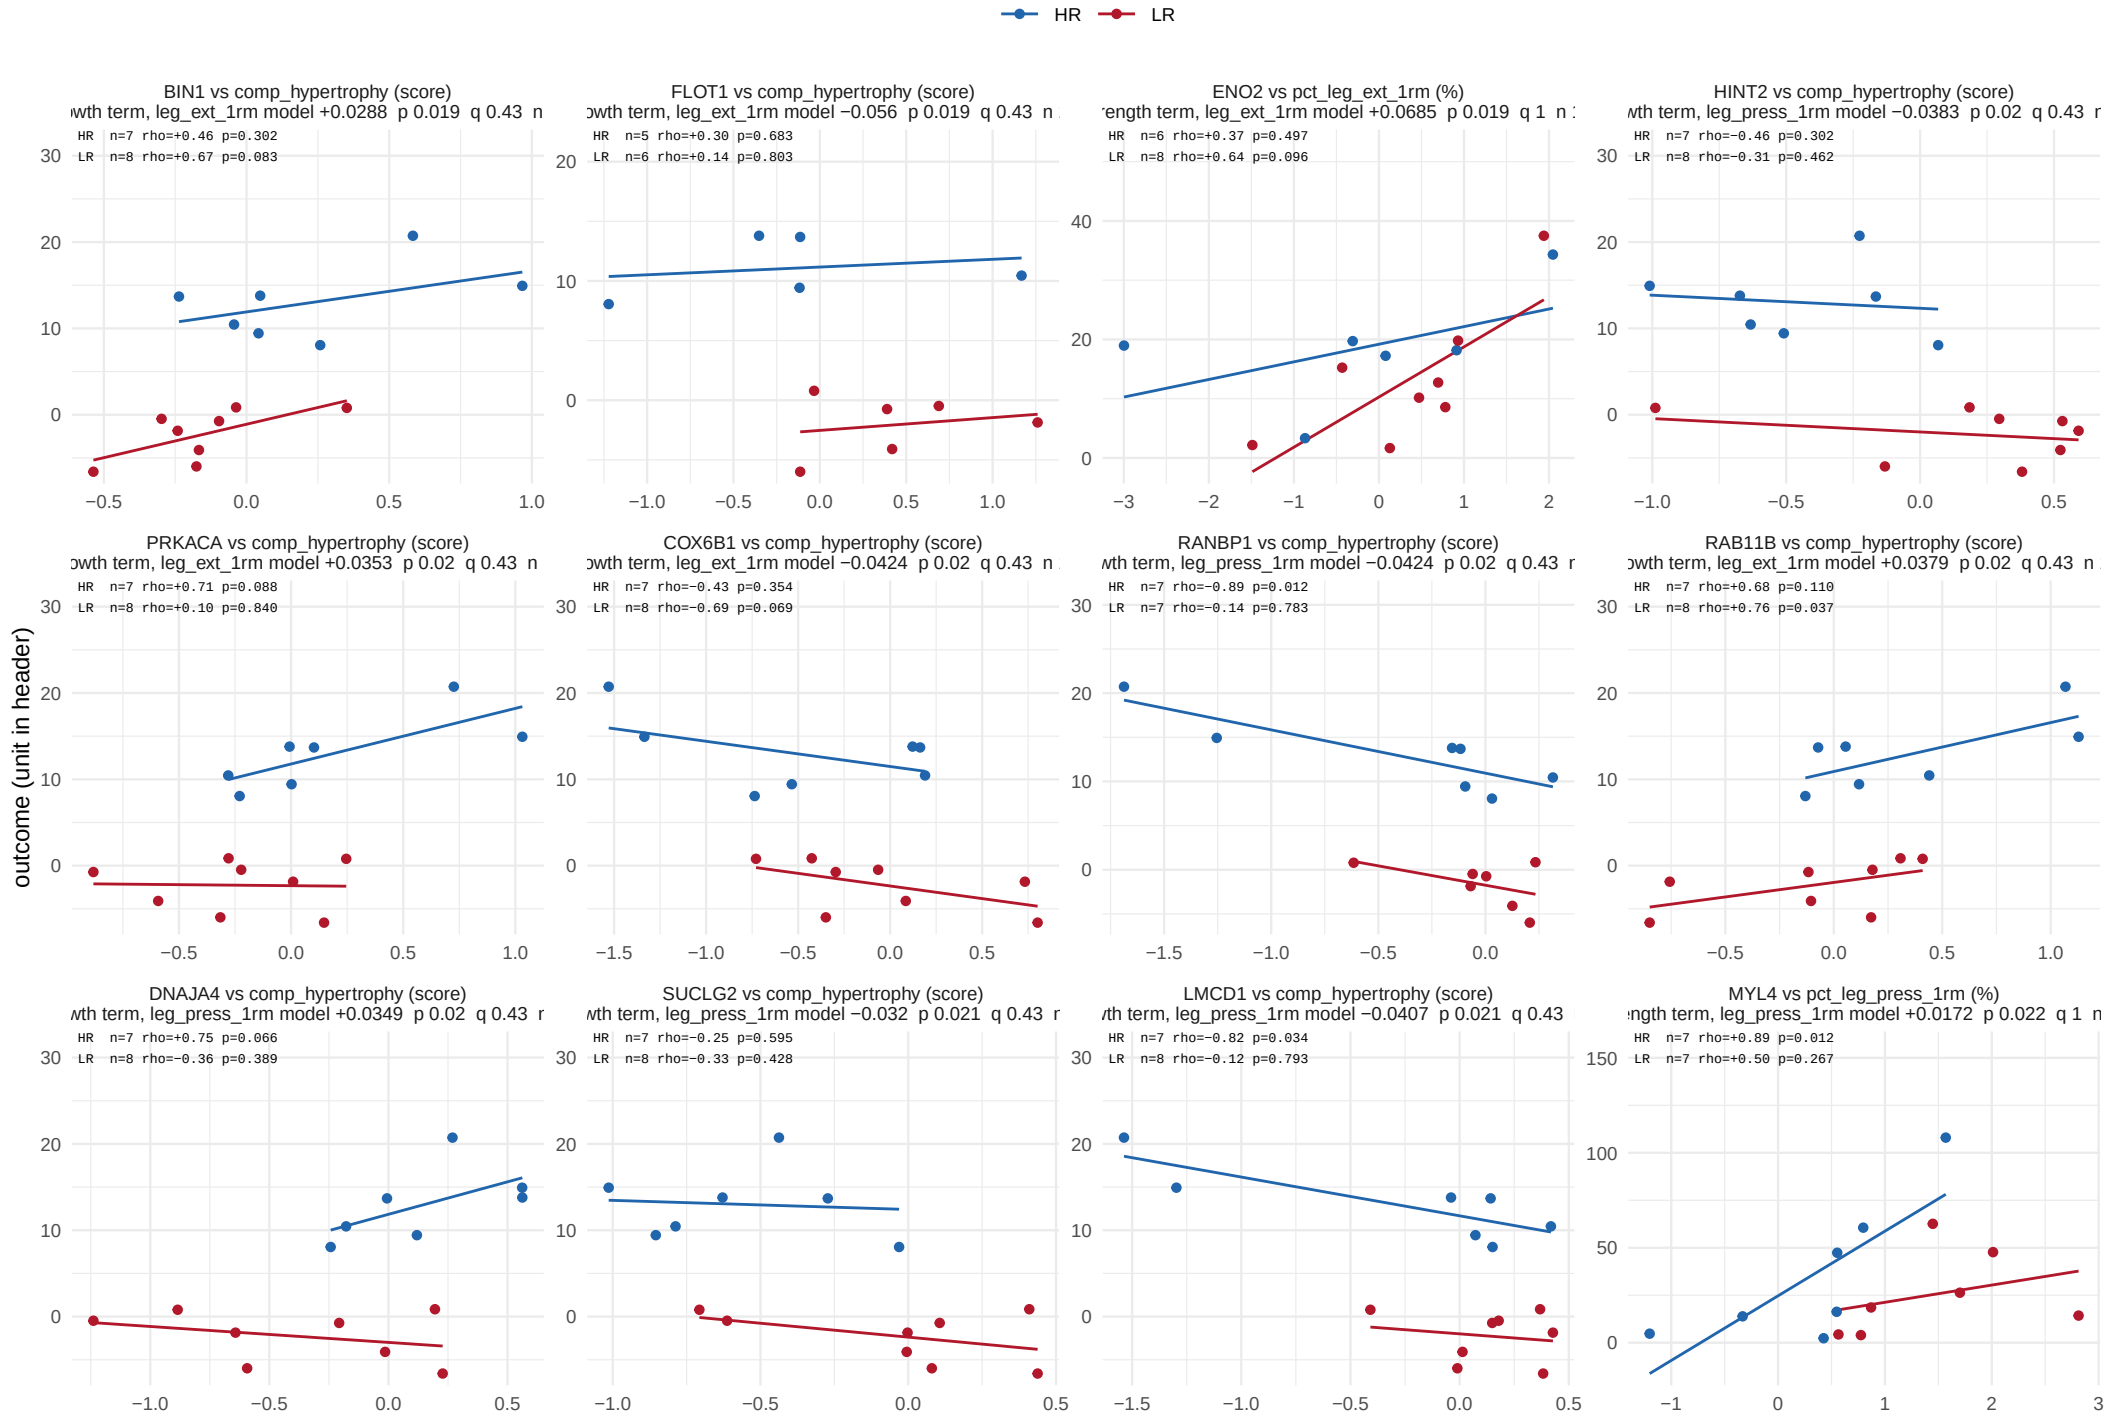

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.


Two predictor, acute window

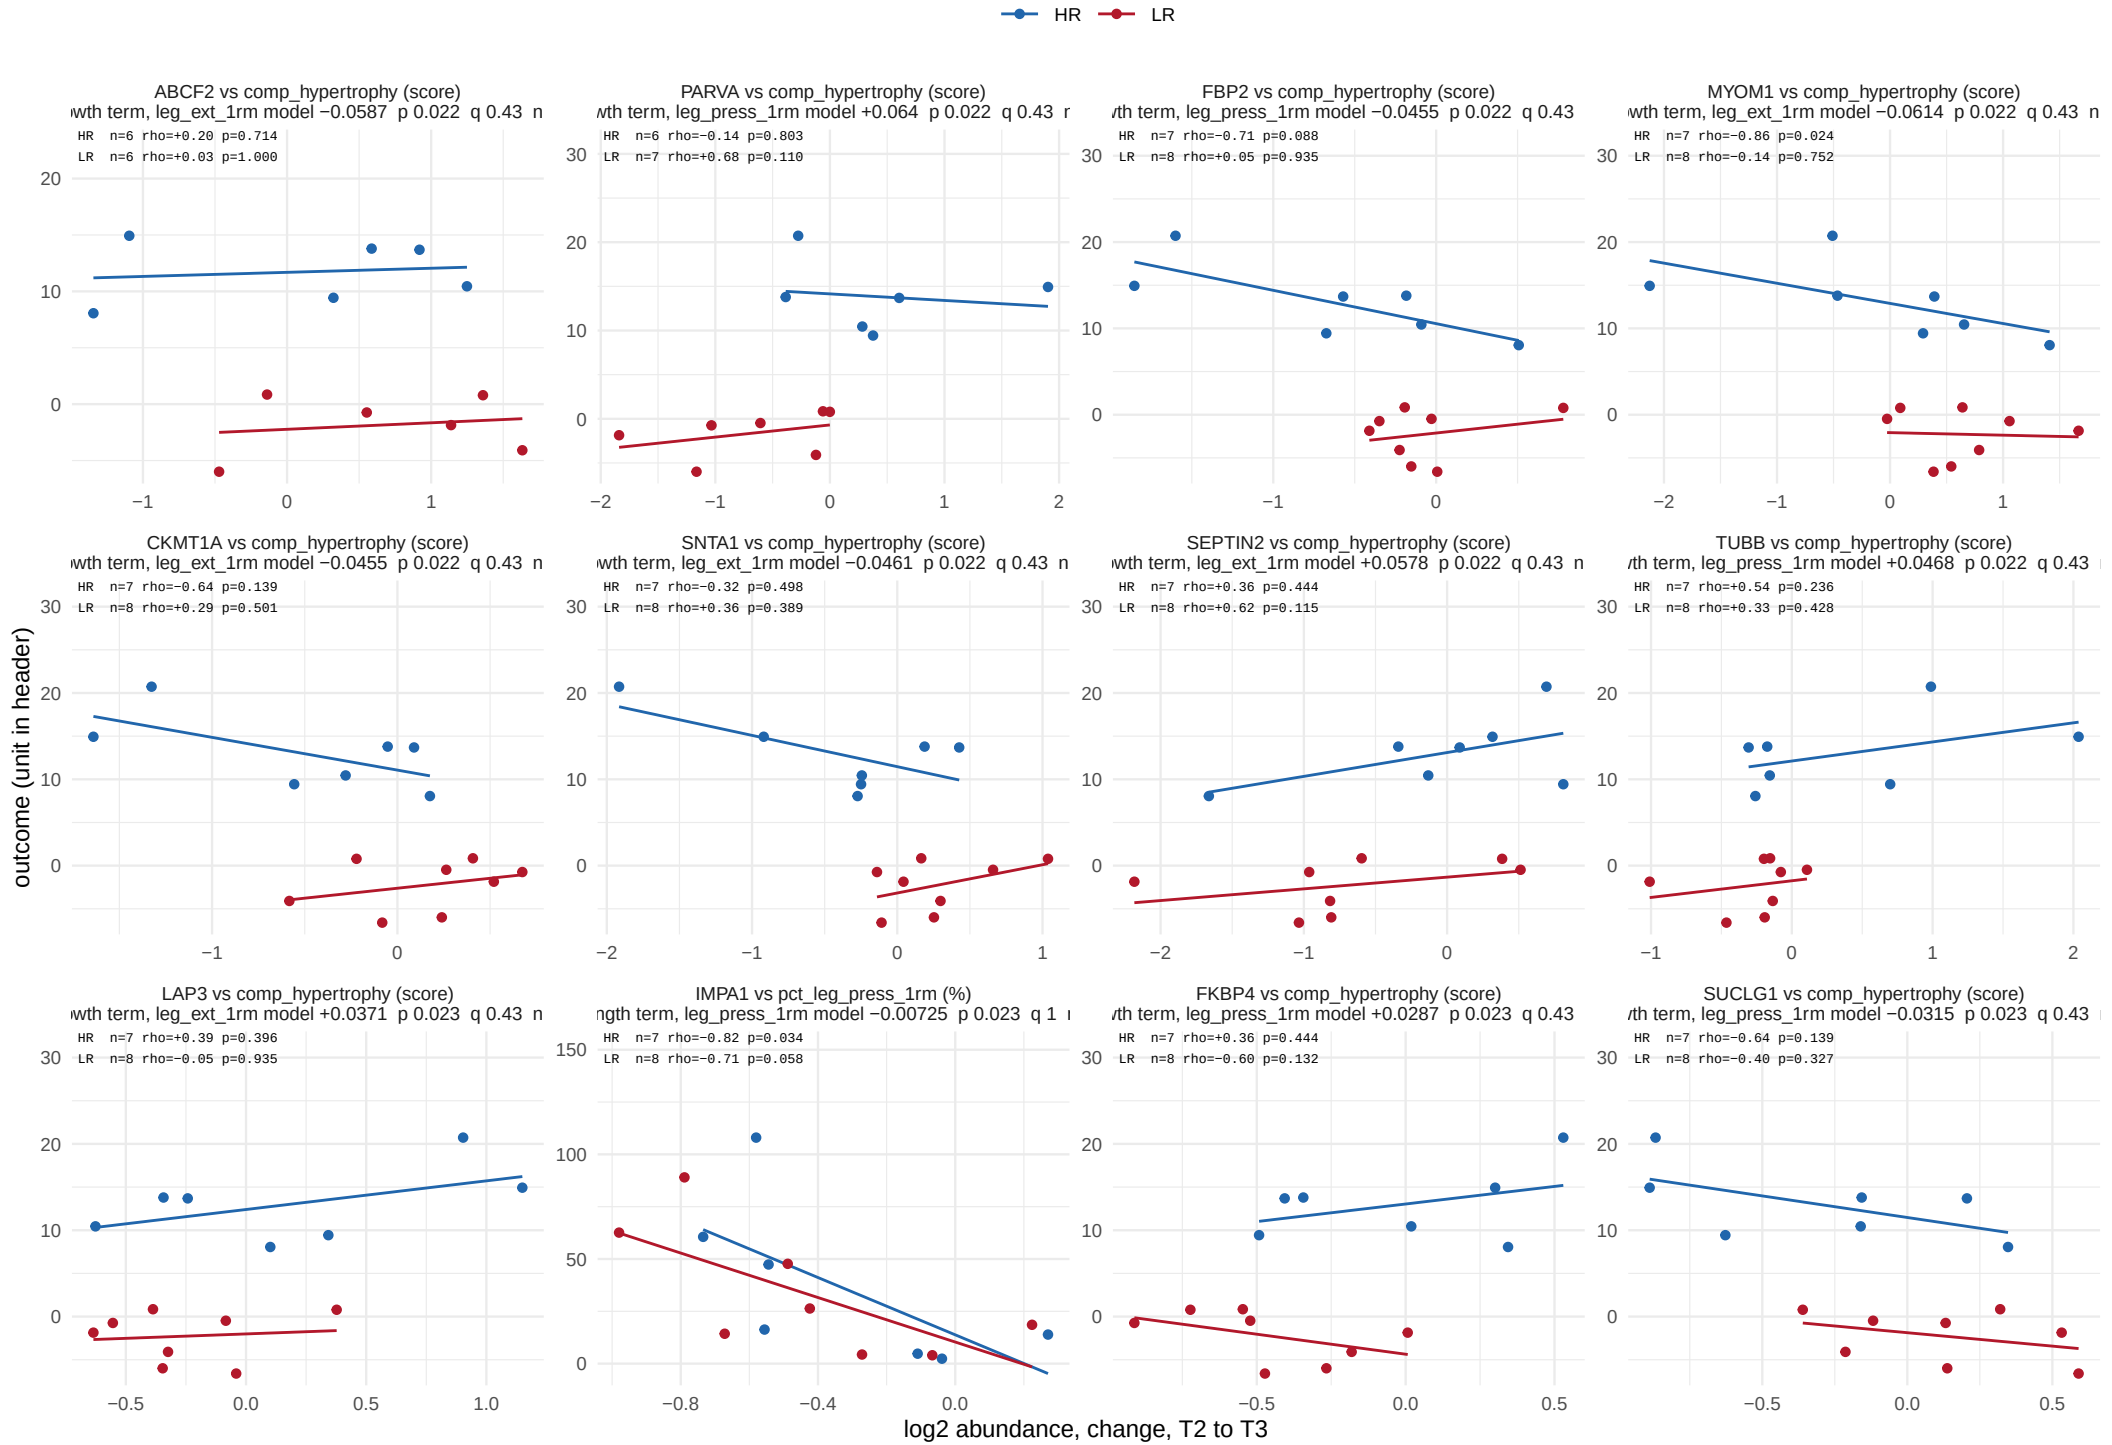

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.


Two predictor, acute window

378 of 5806 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 15 of 32.

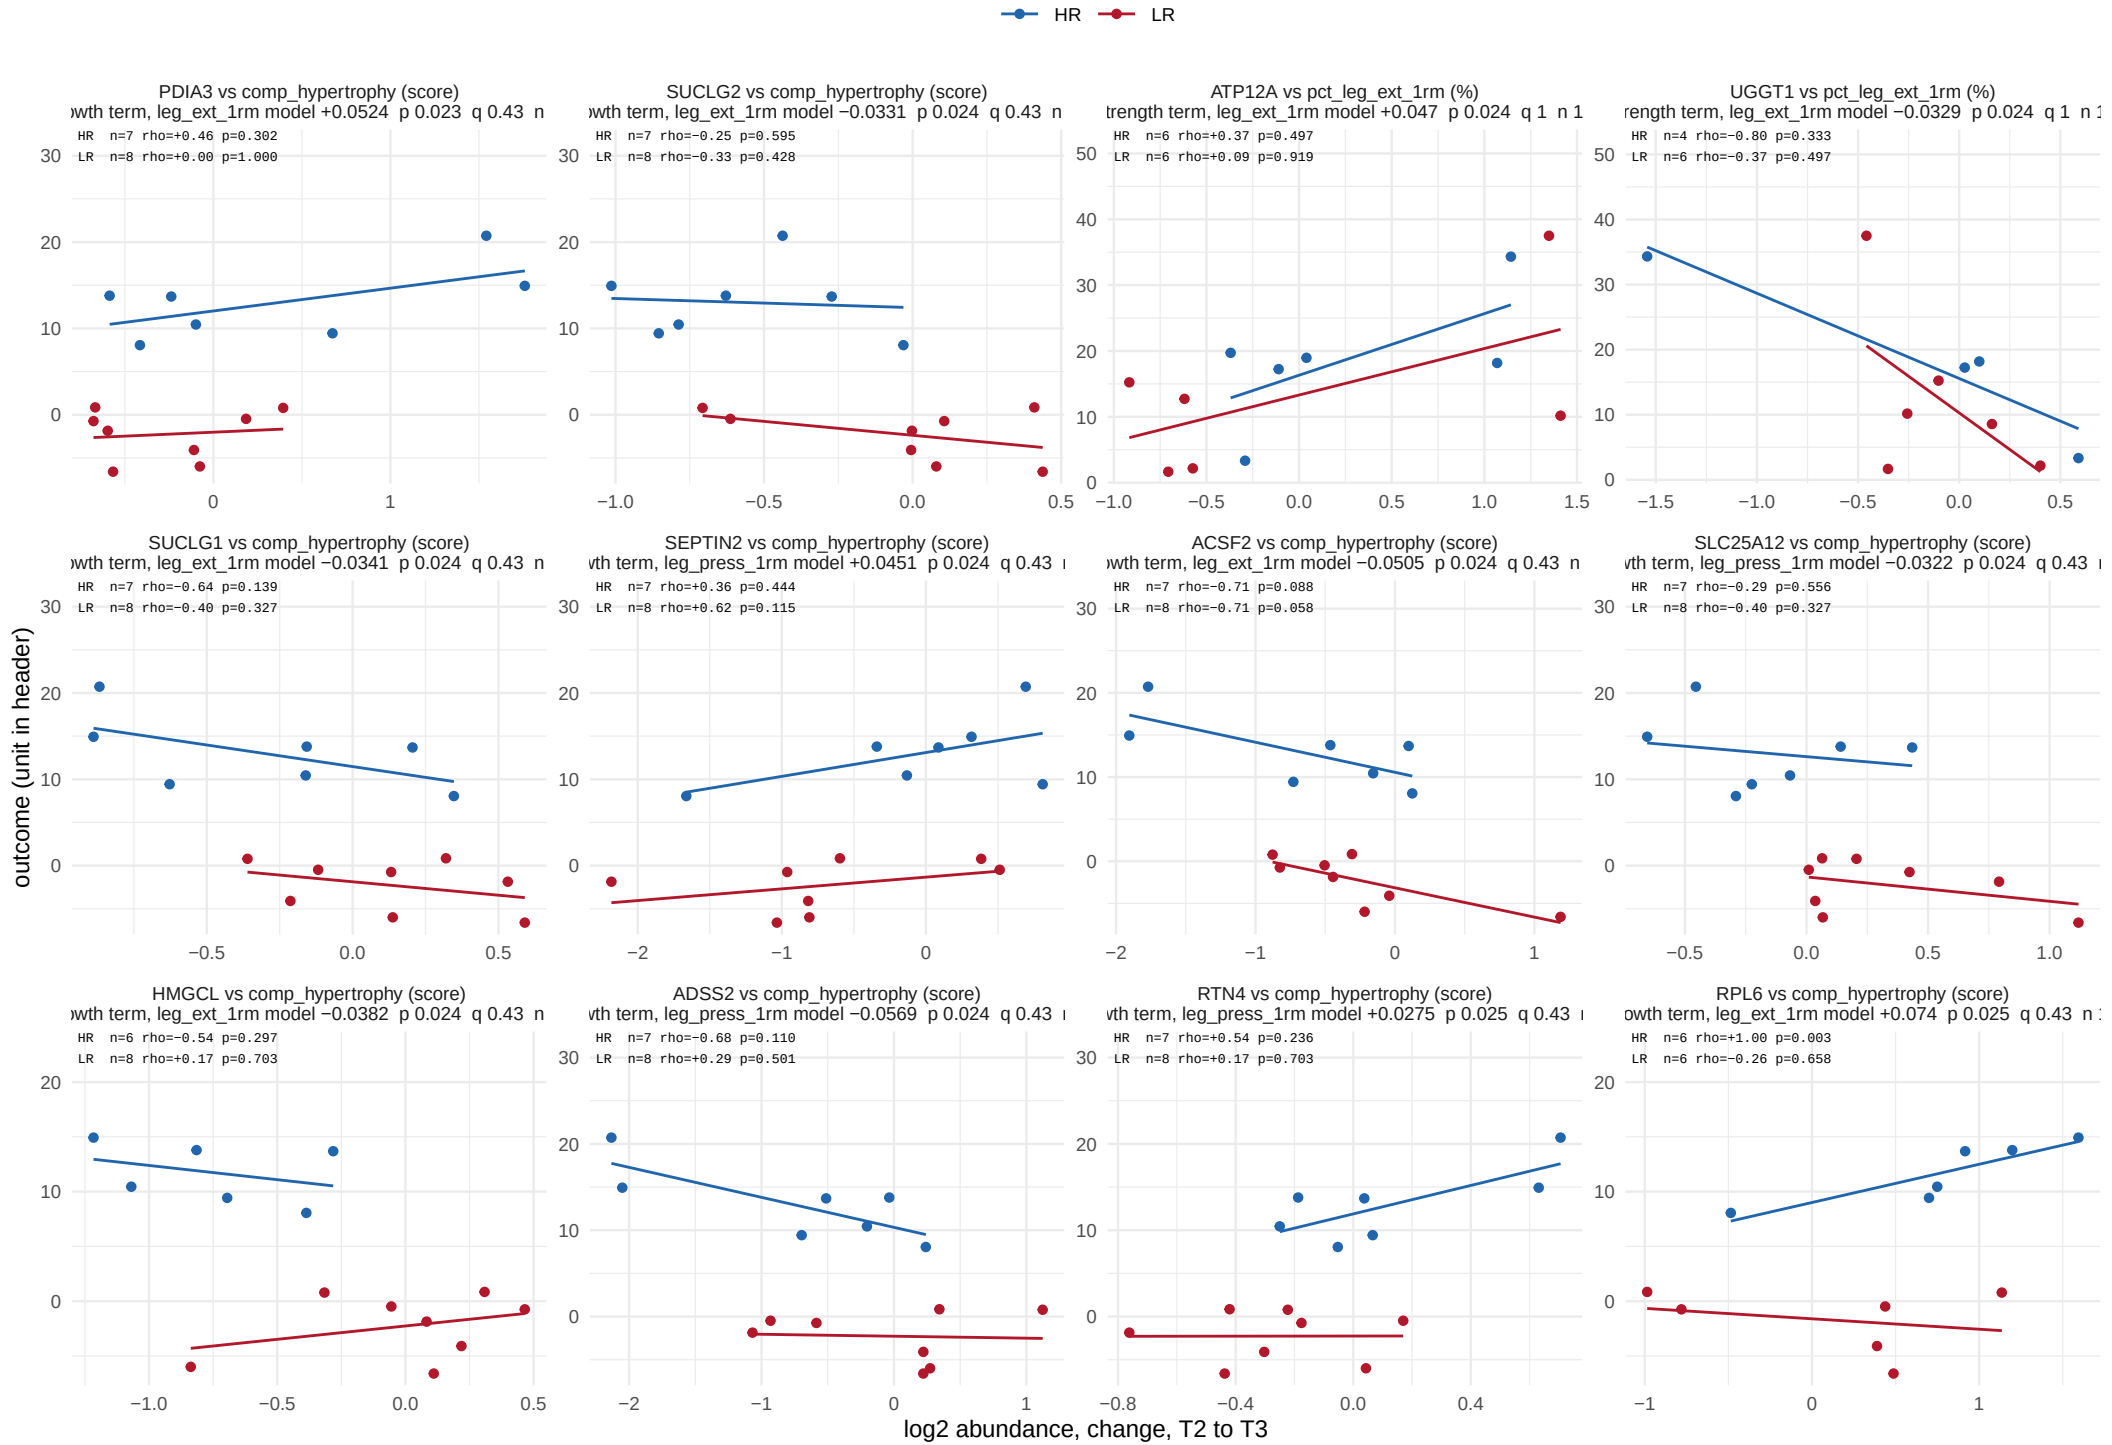

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.


Two predictor, acute window

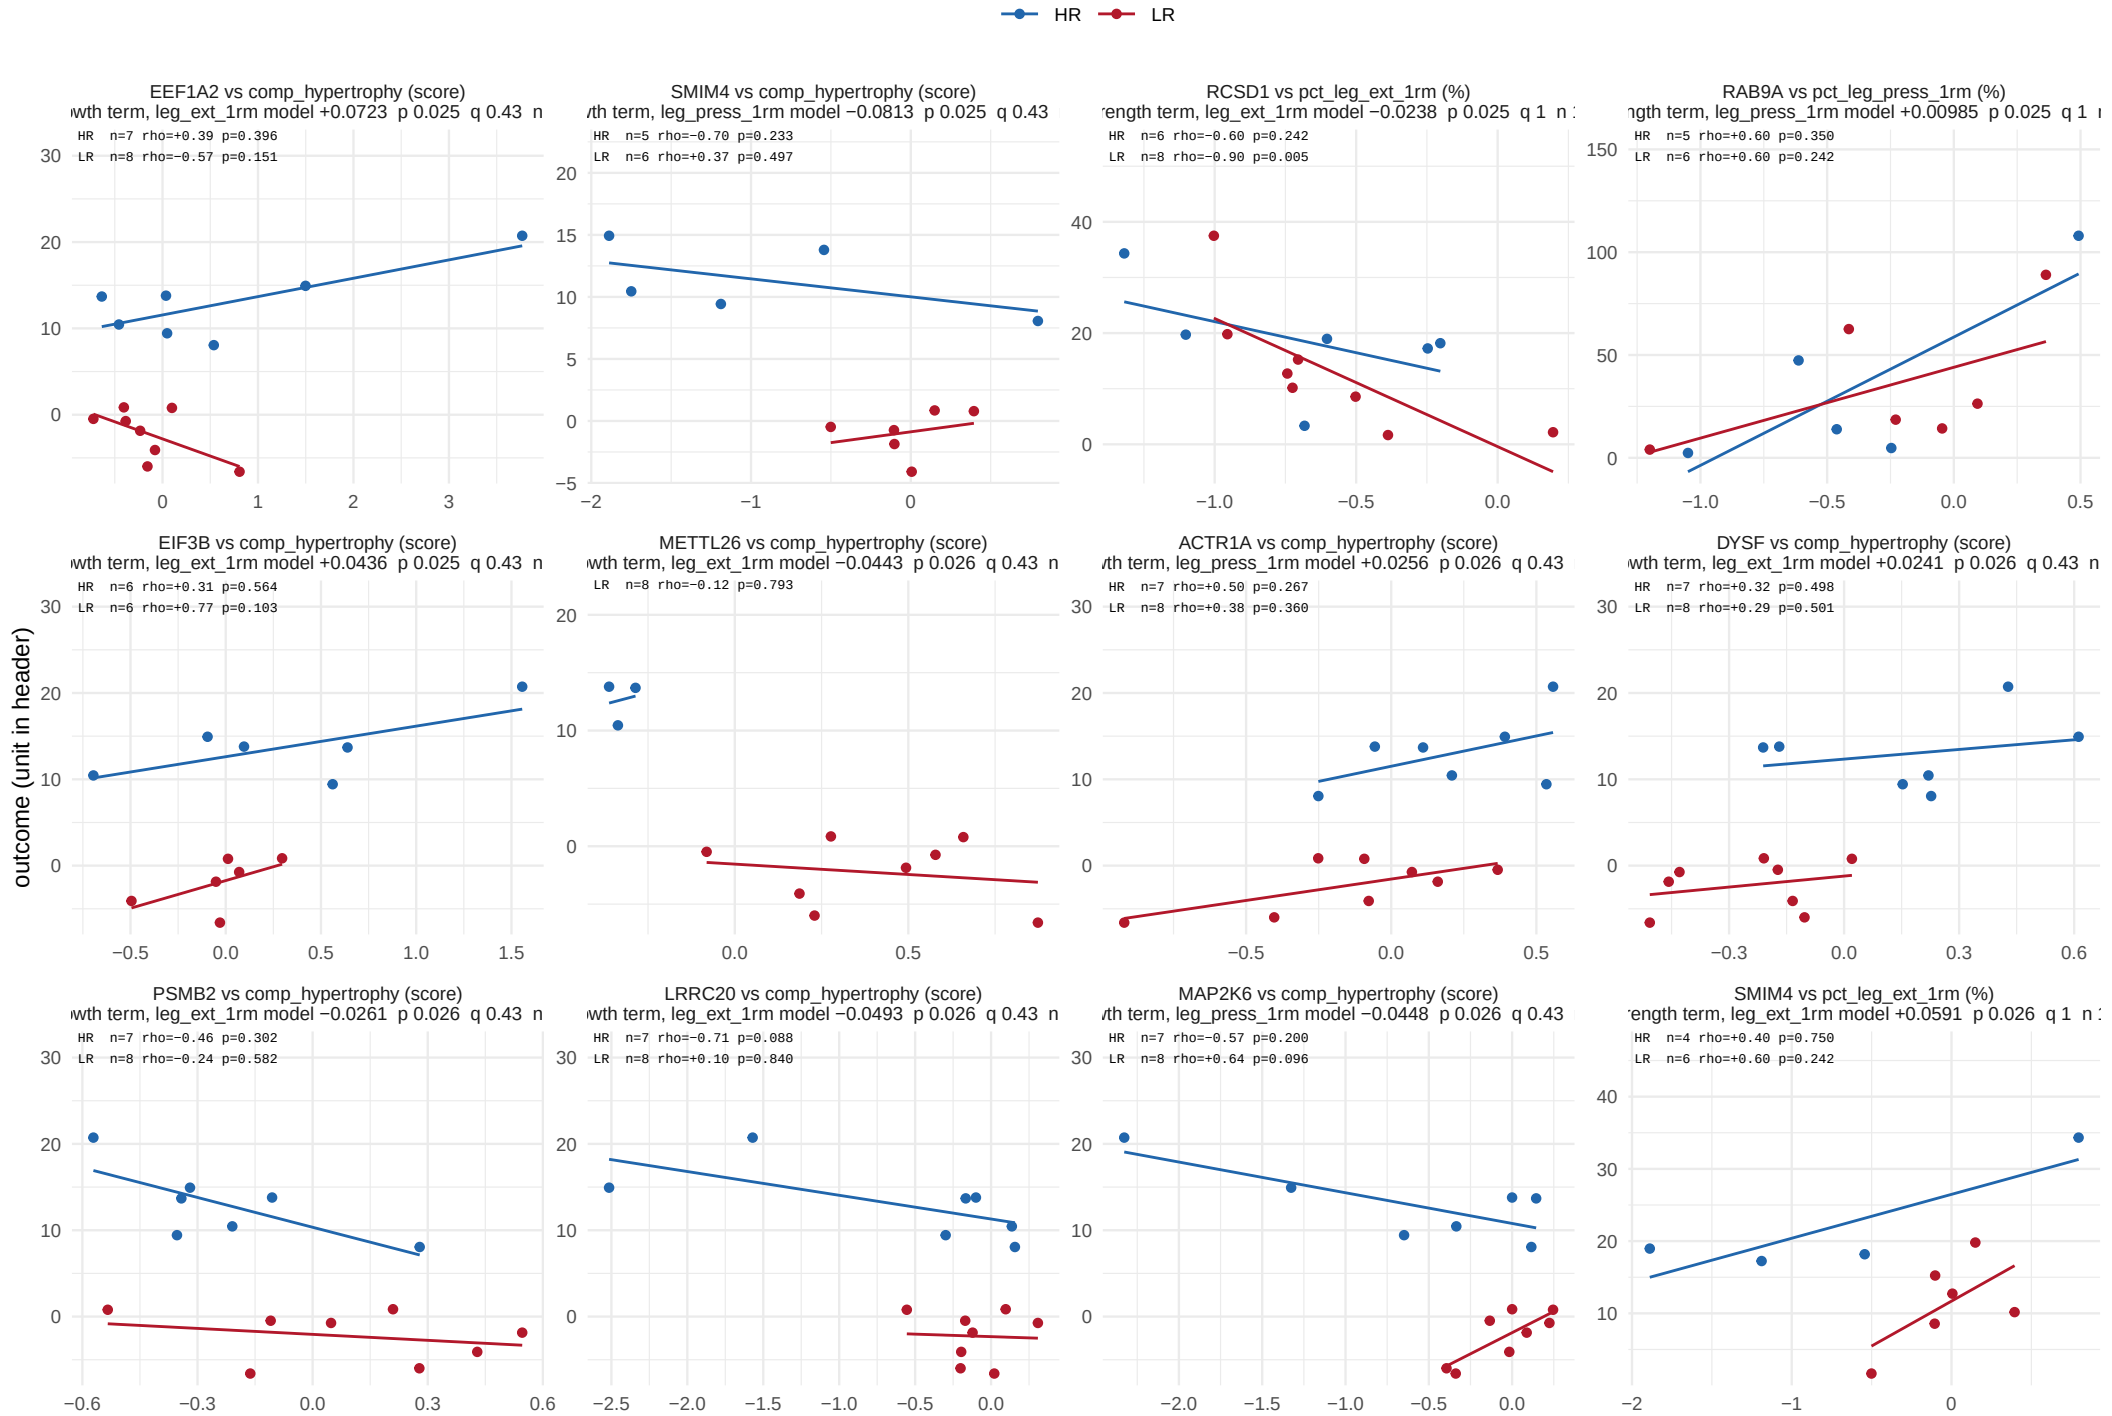

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, acute window


378 of 5806 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 17 of 32.

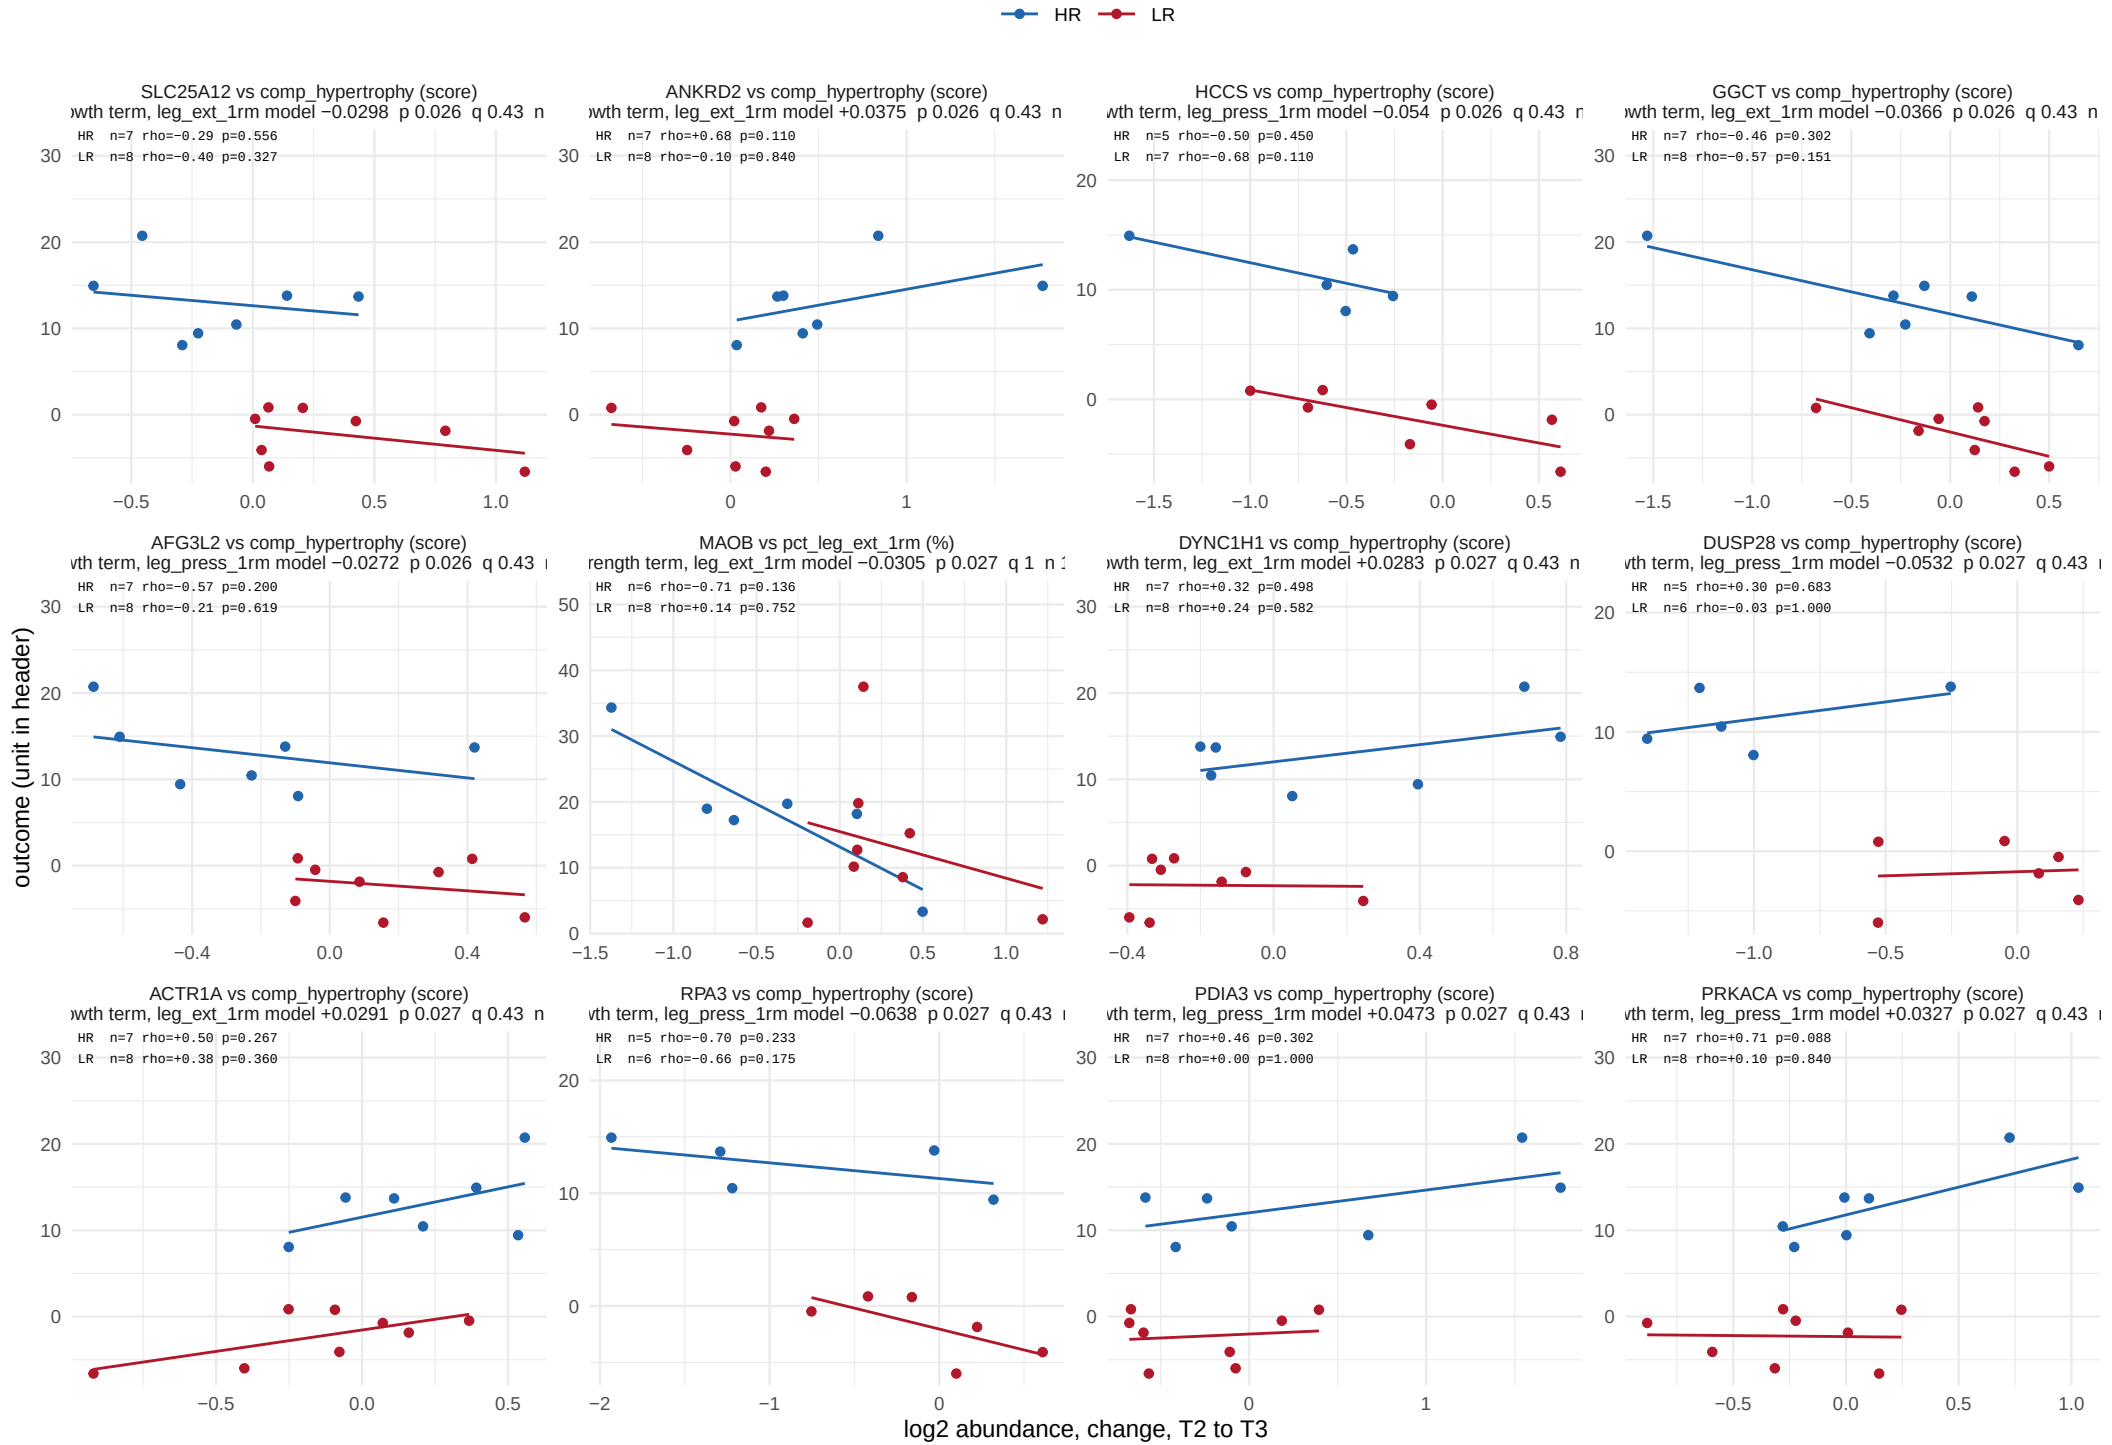

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, acute window


378 of 5806 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 18 of 32.

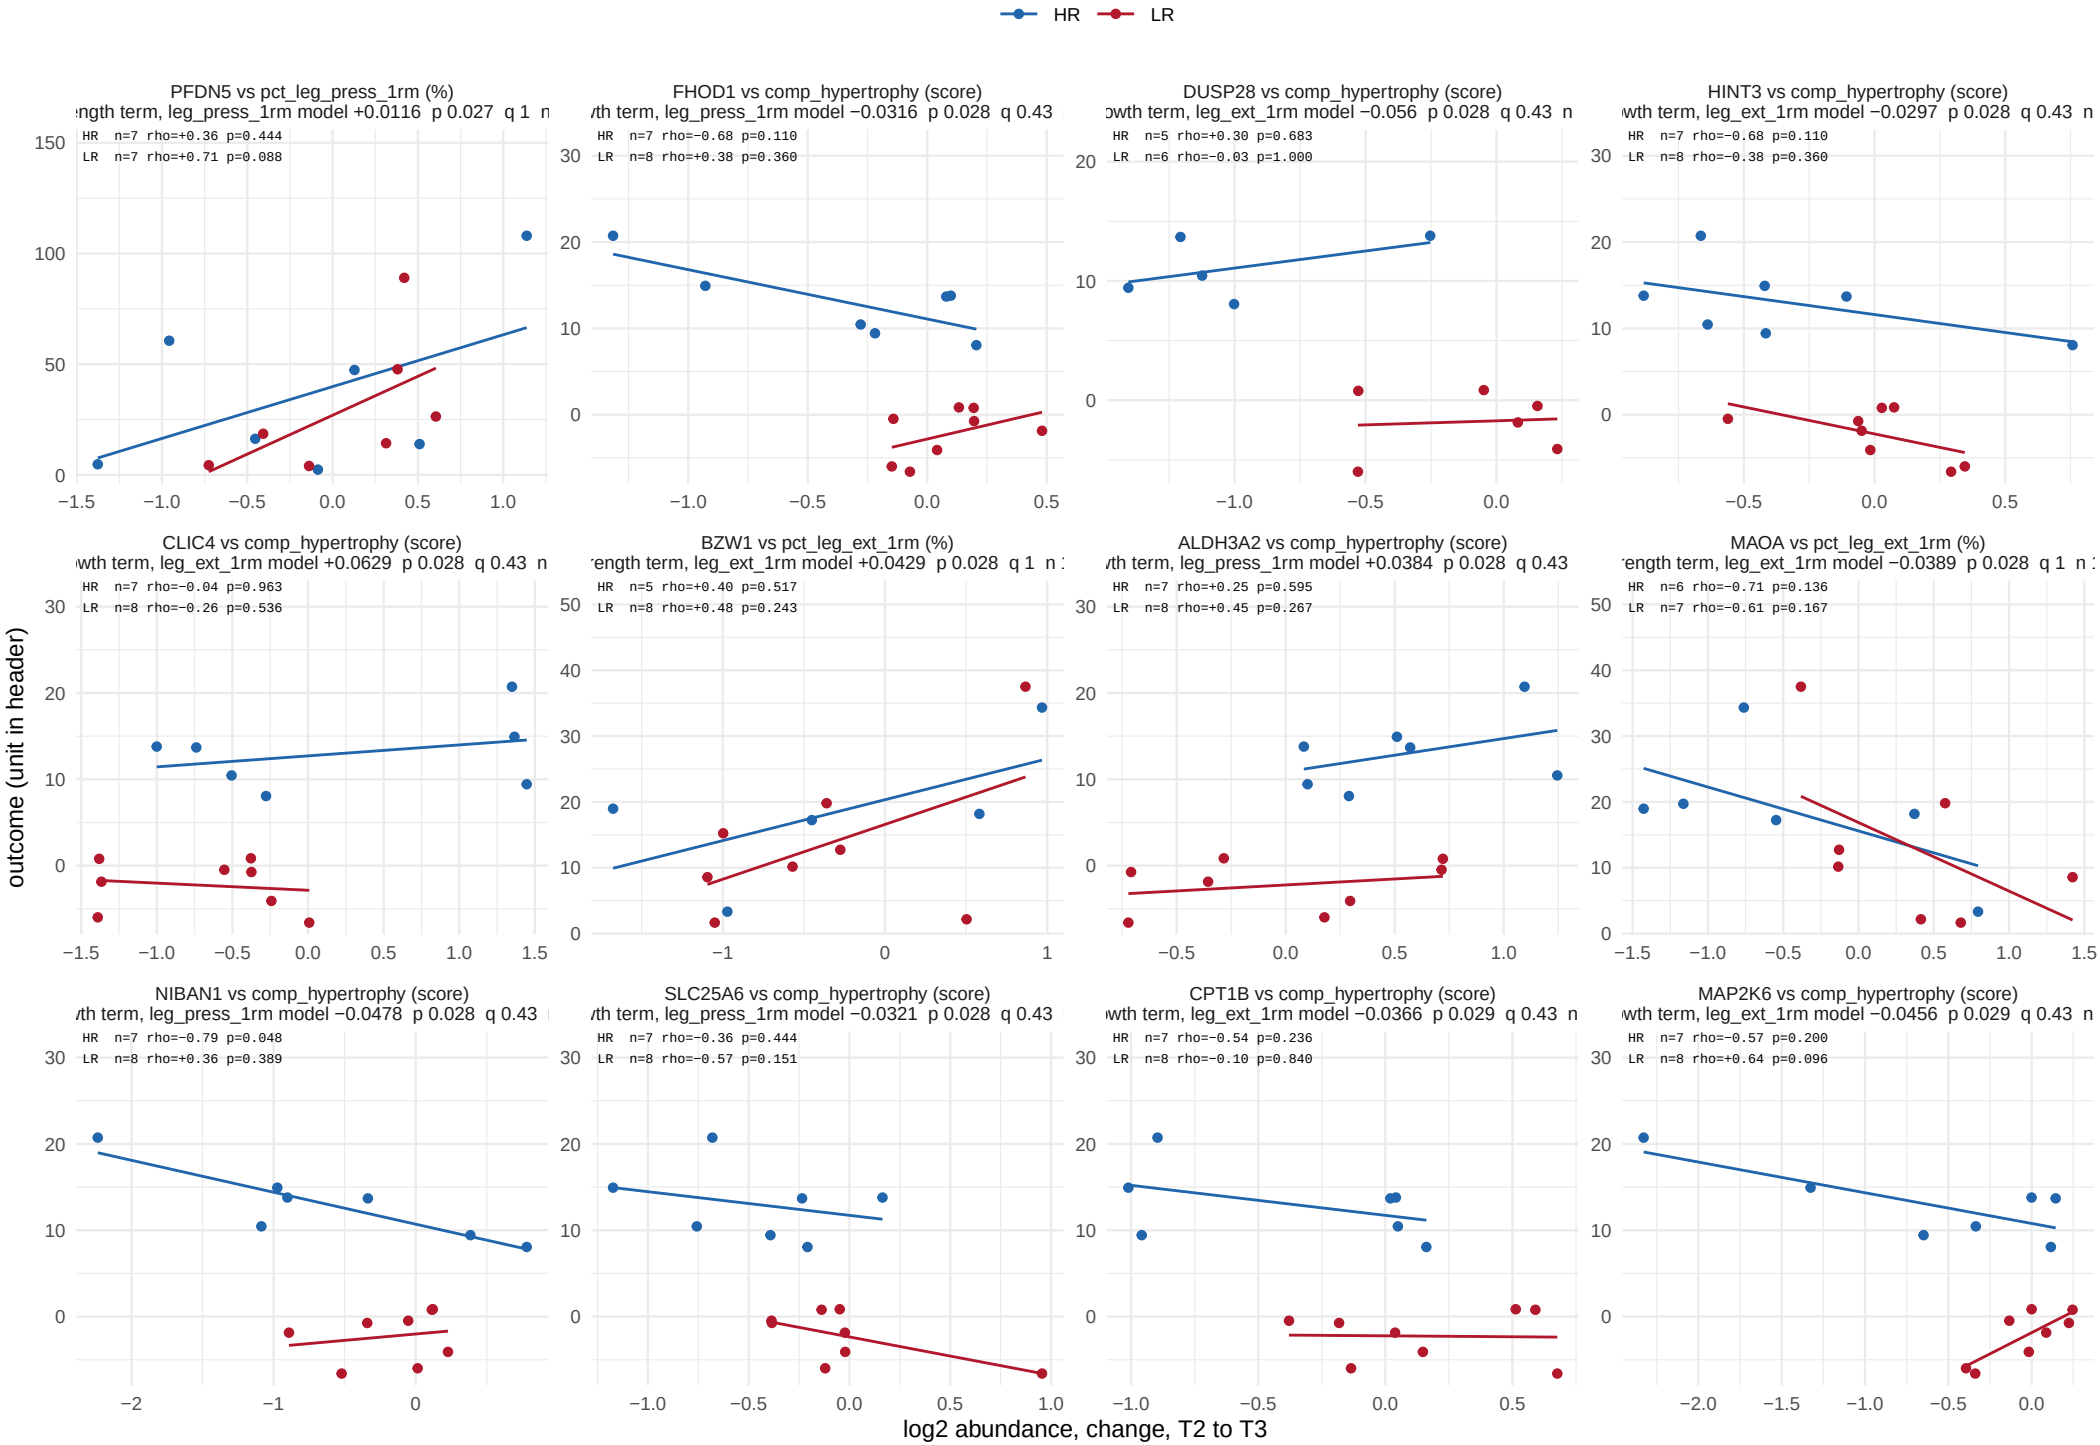

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, acute window


378 of 5806 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 19 of 32.

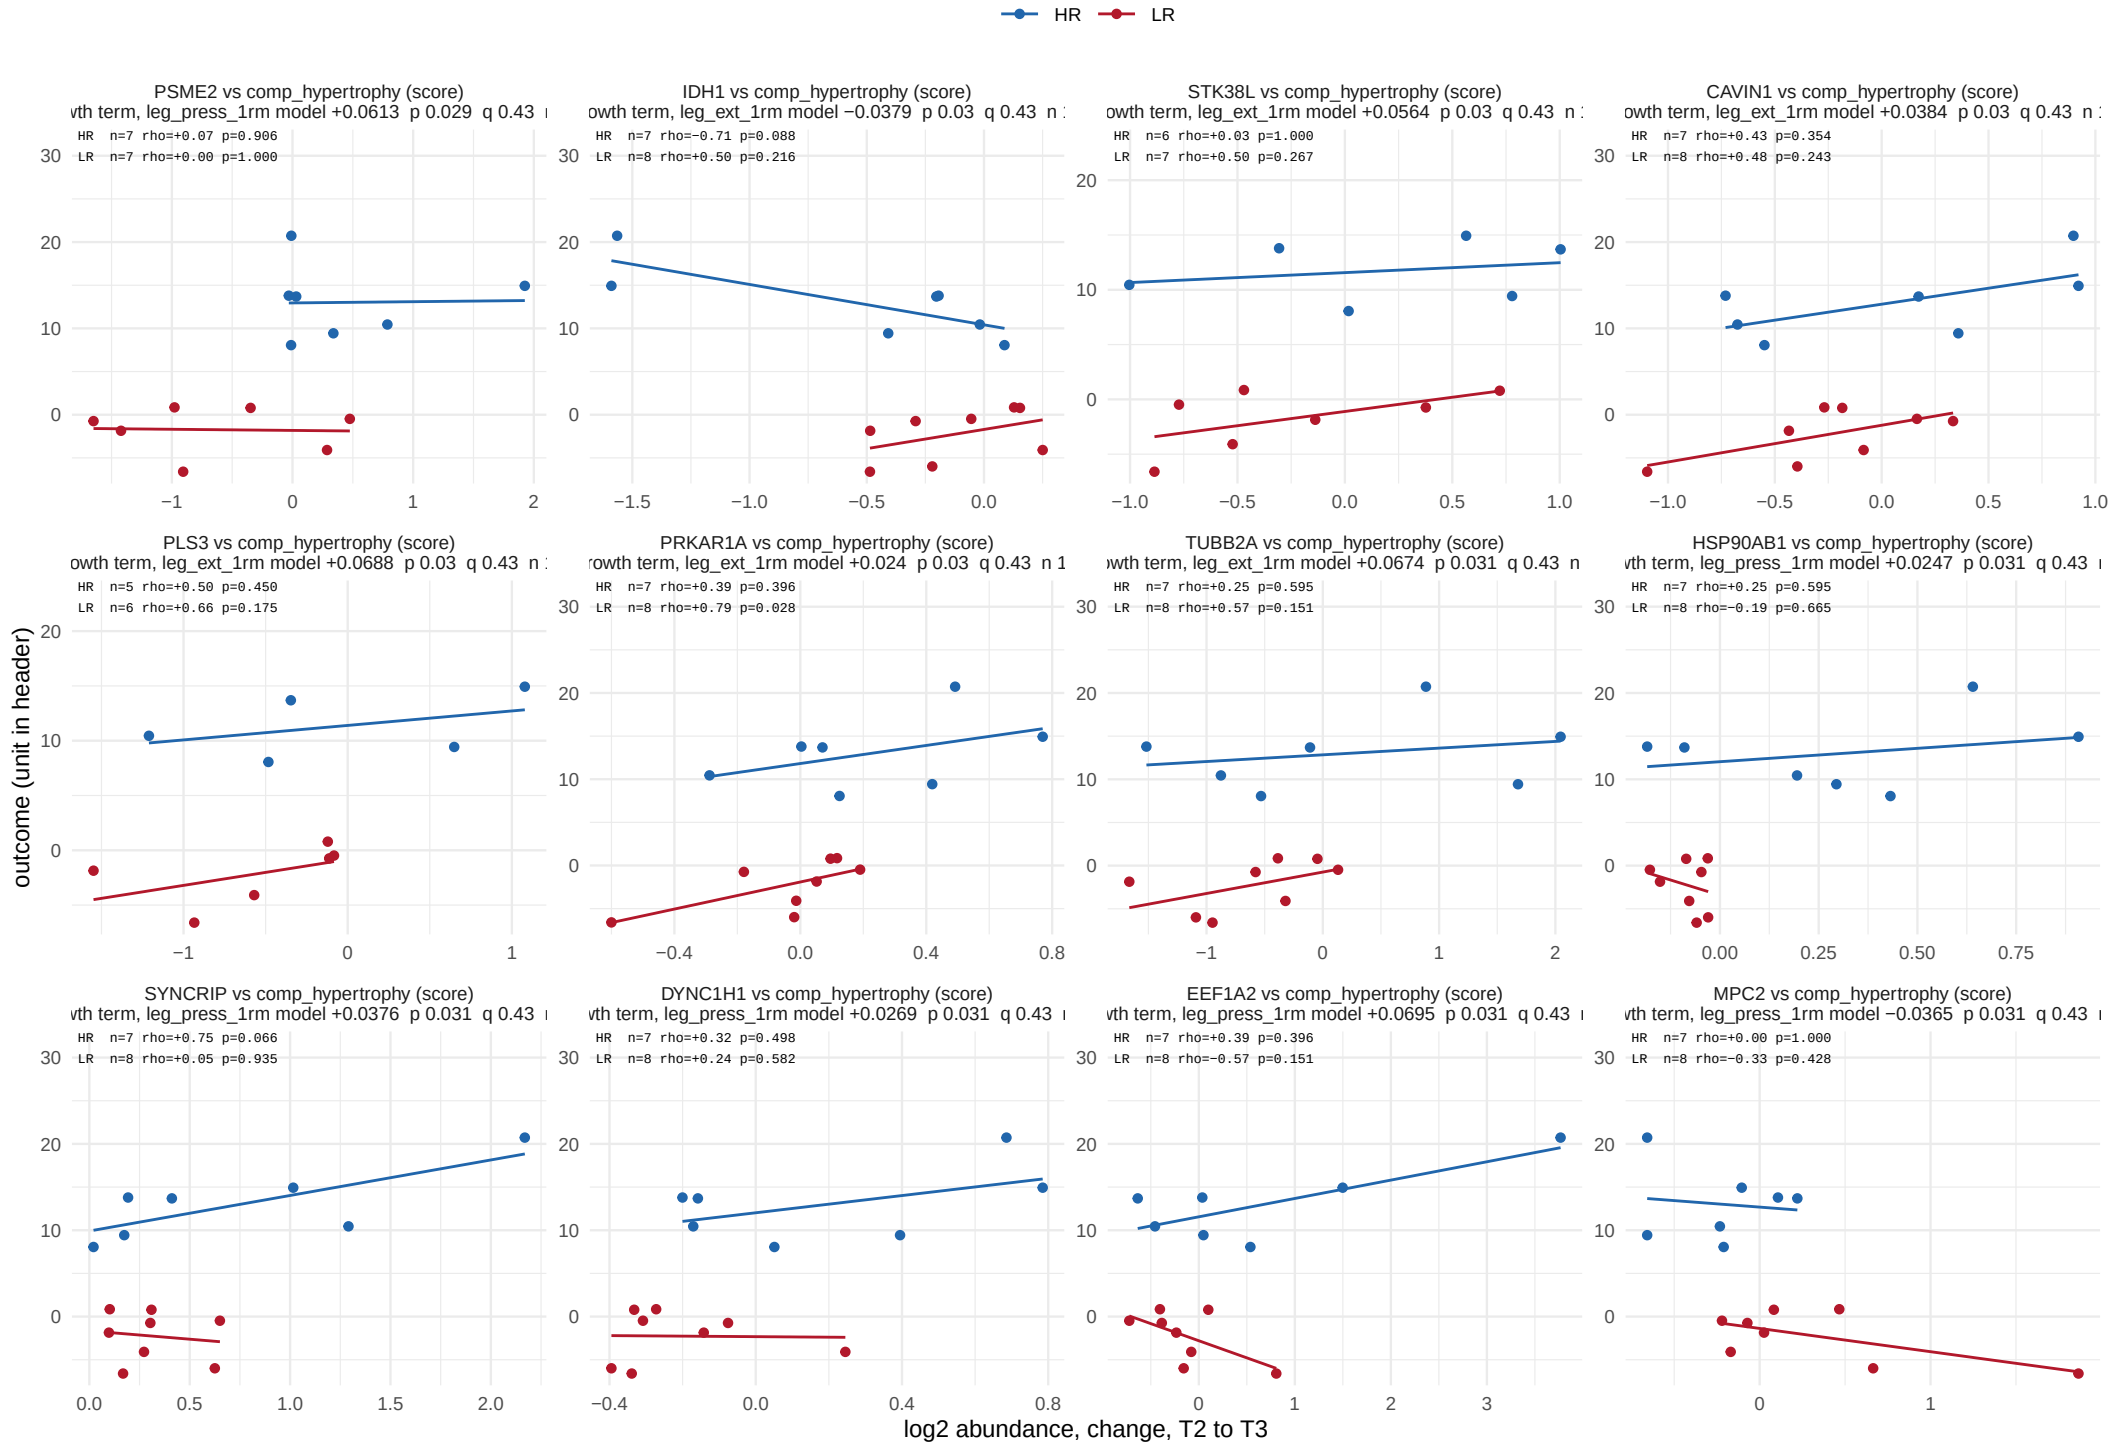

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.


Two predictor, acute window

378 of 5806 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 20 of 32.

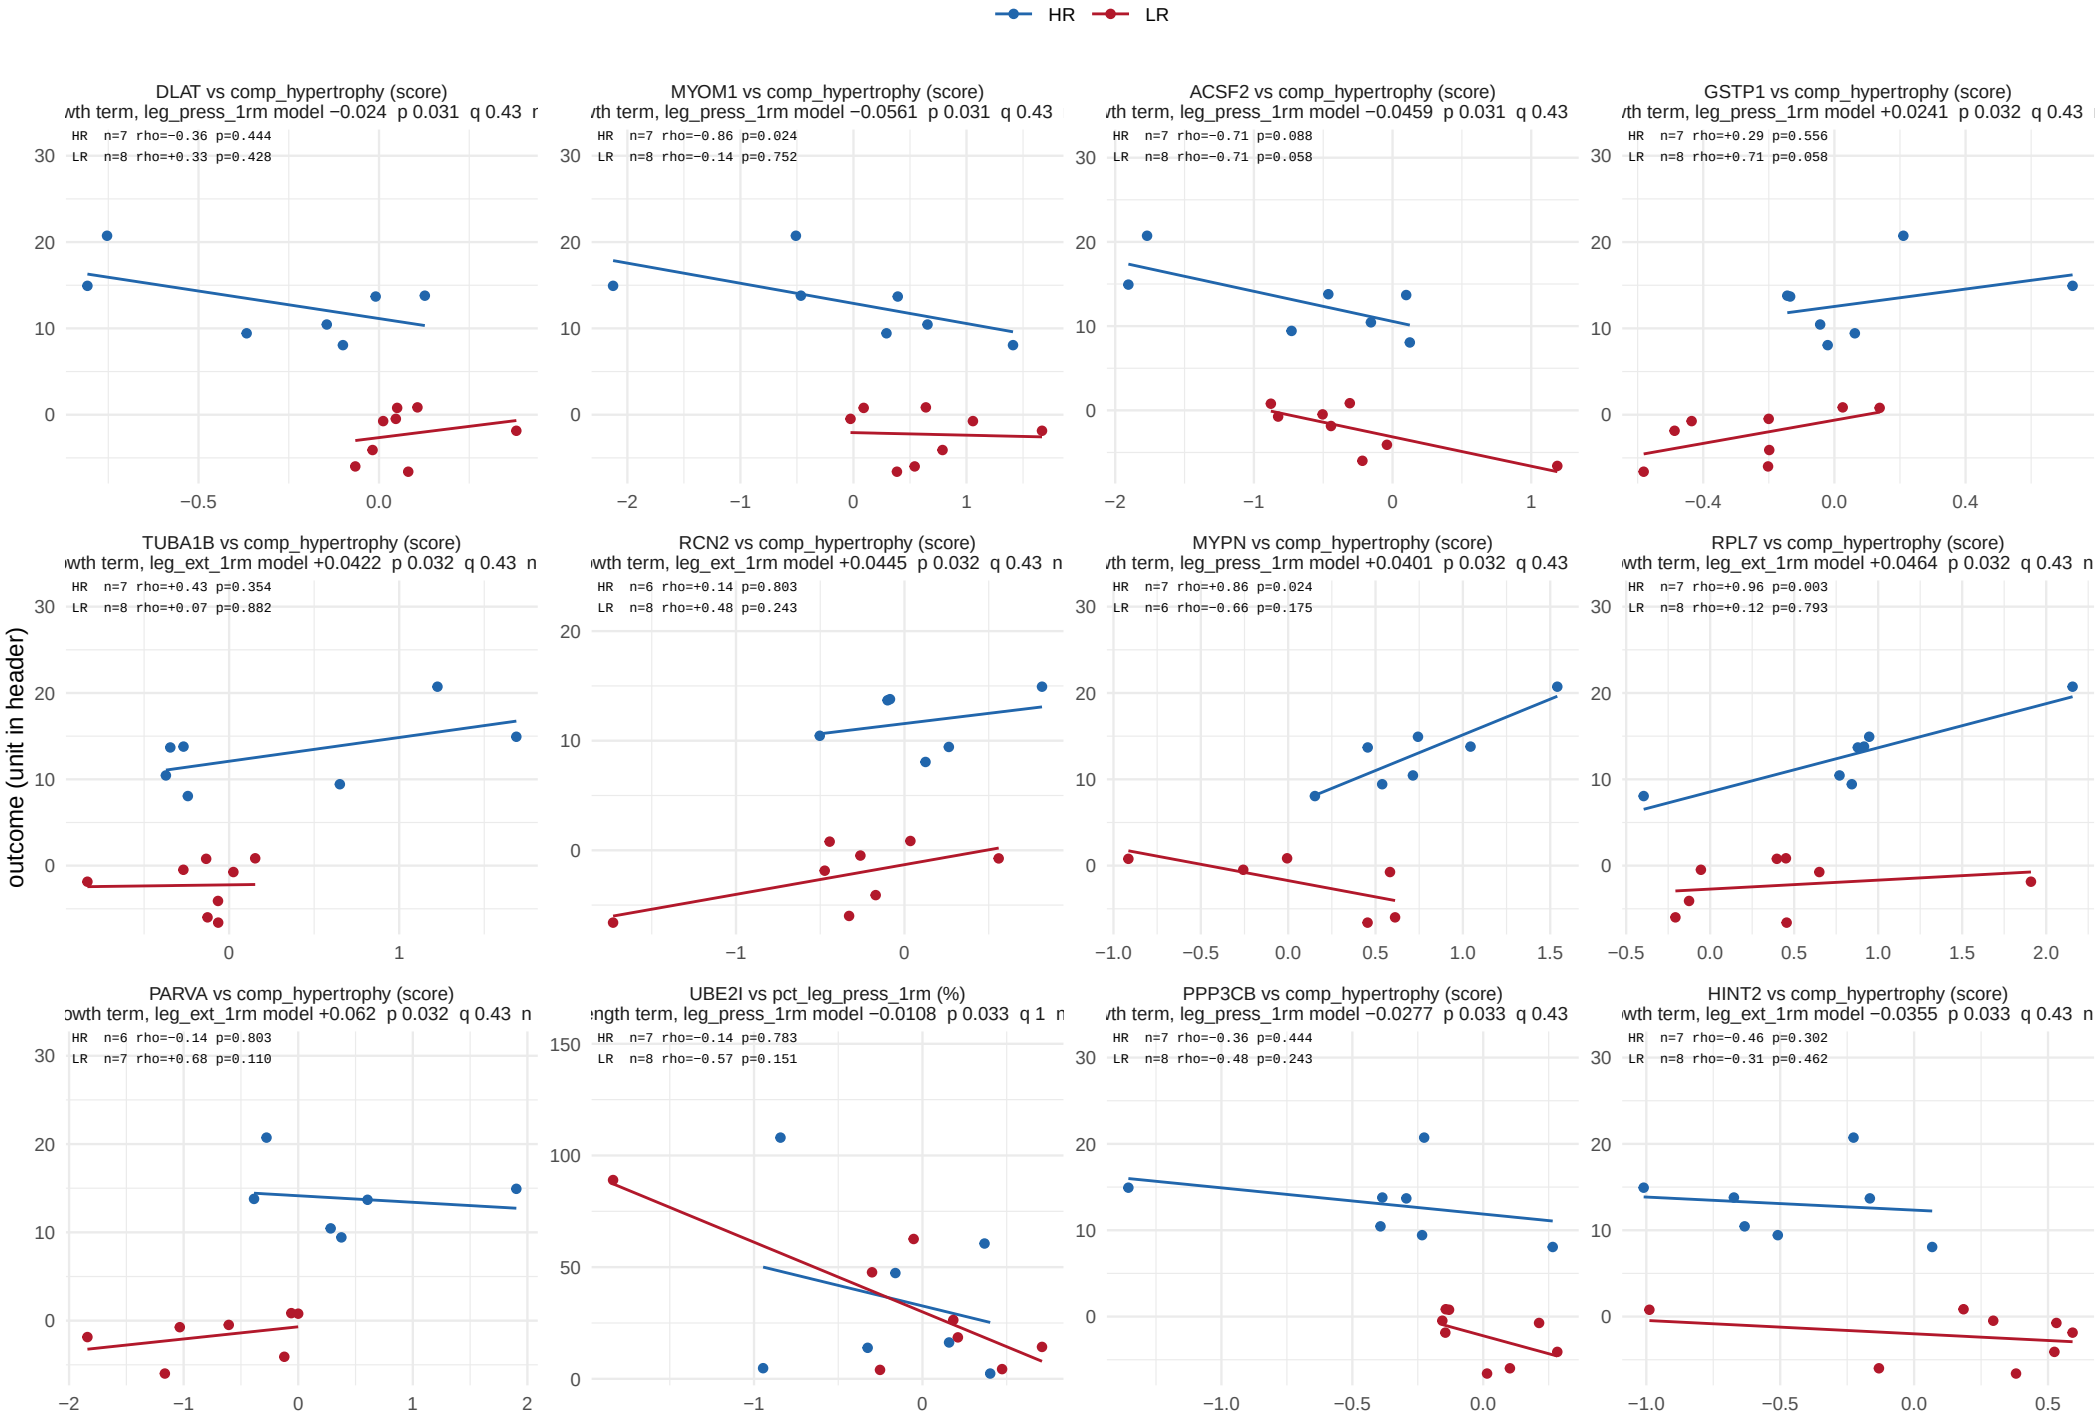


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, acute window

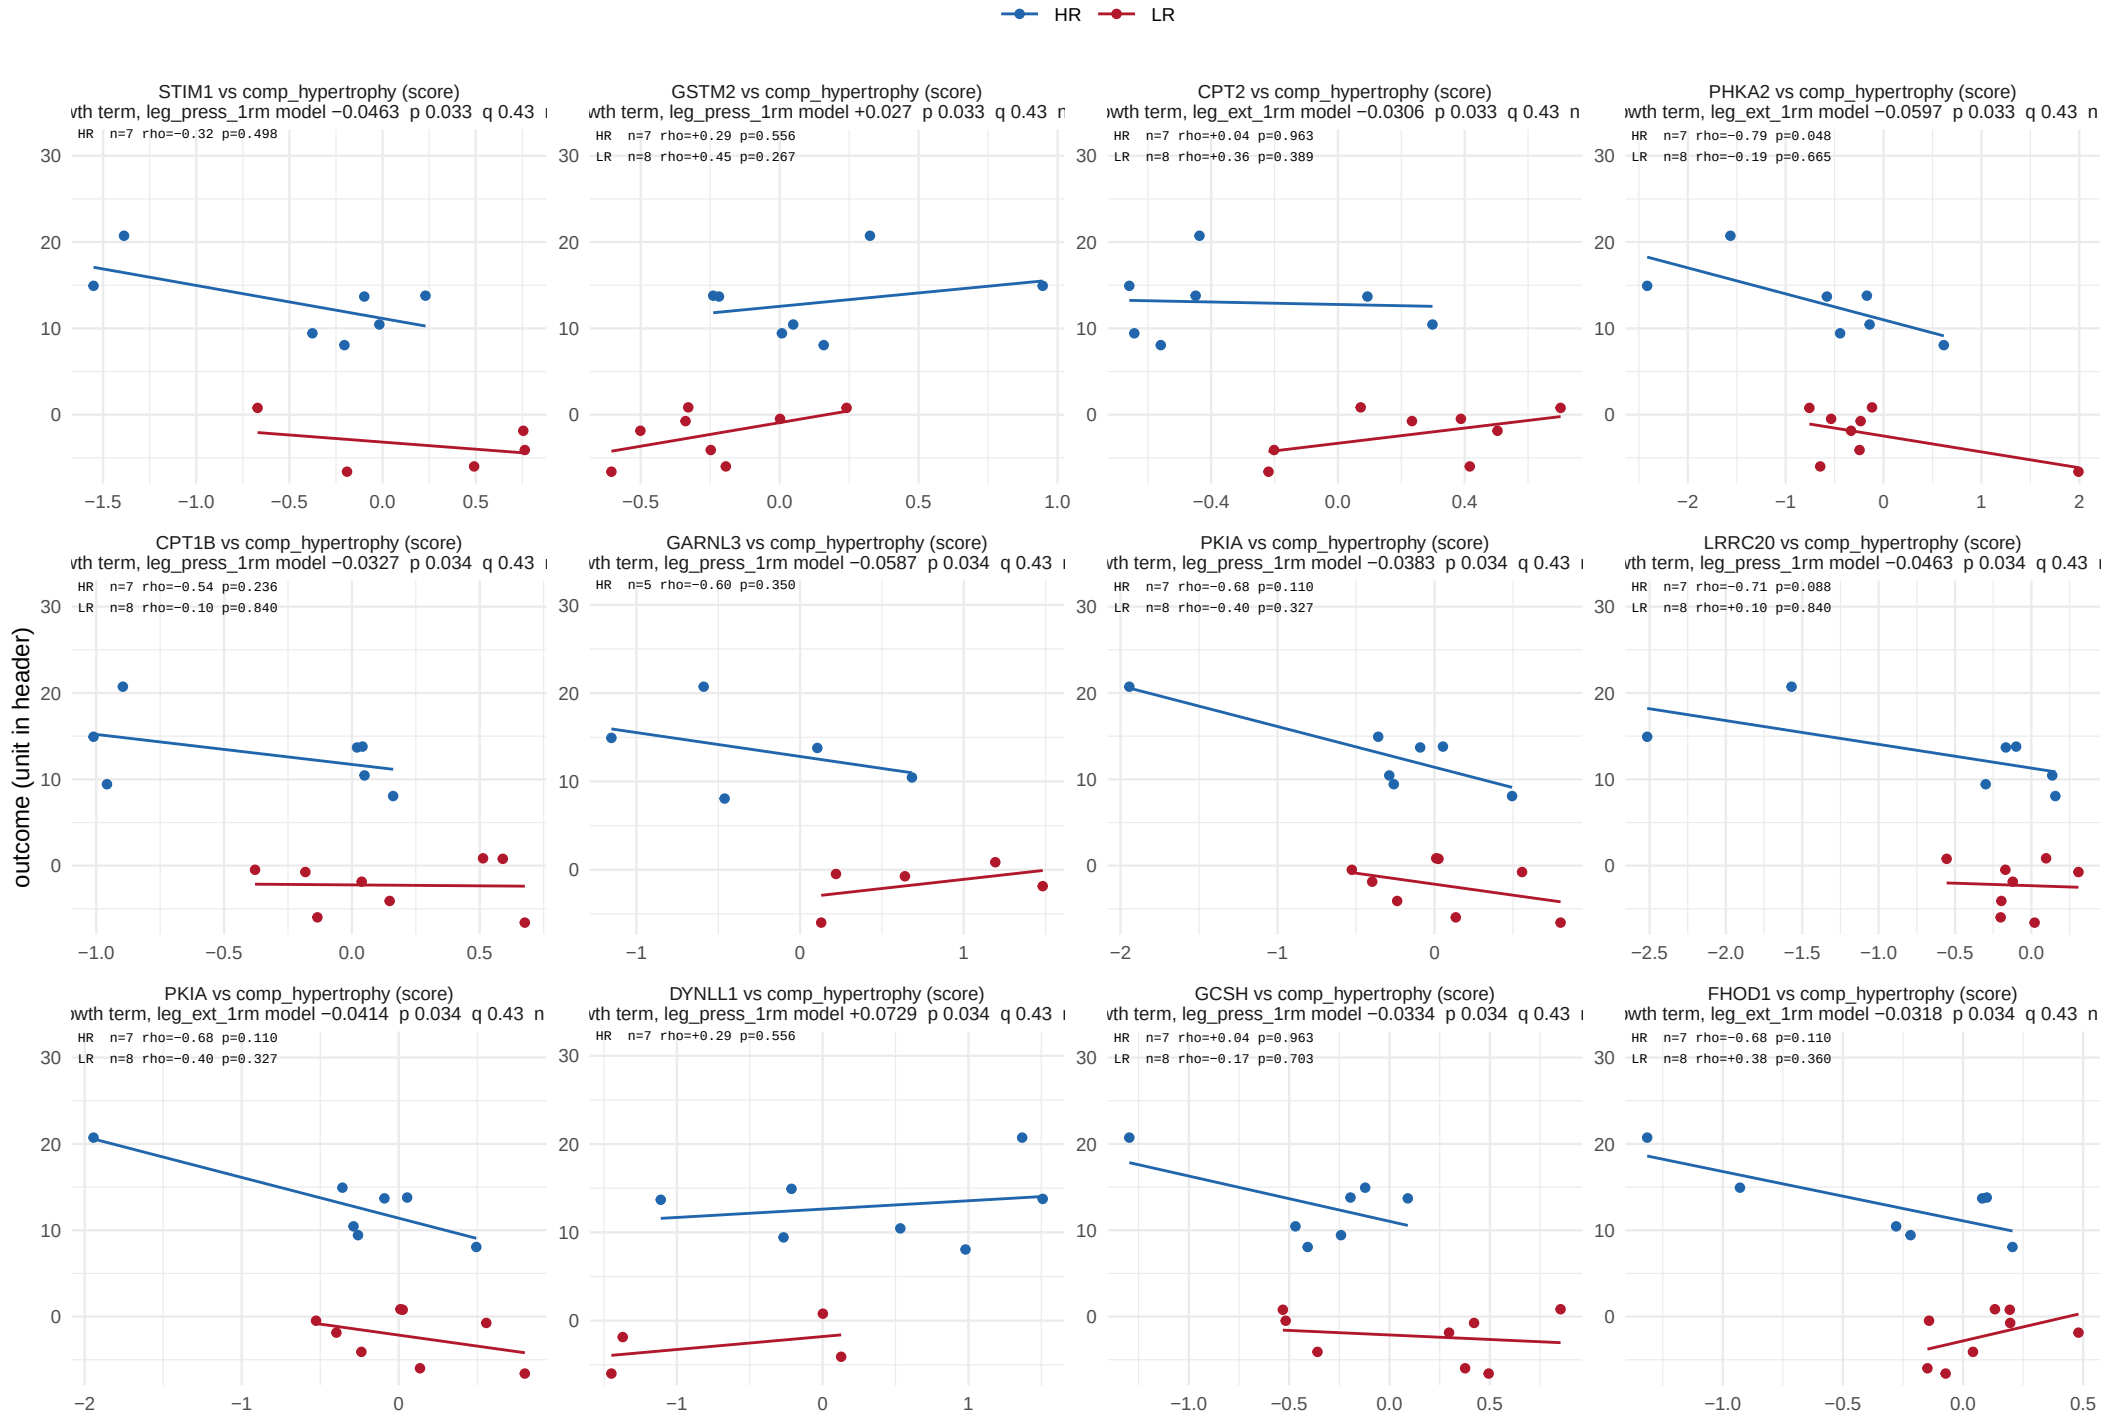


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, acute window

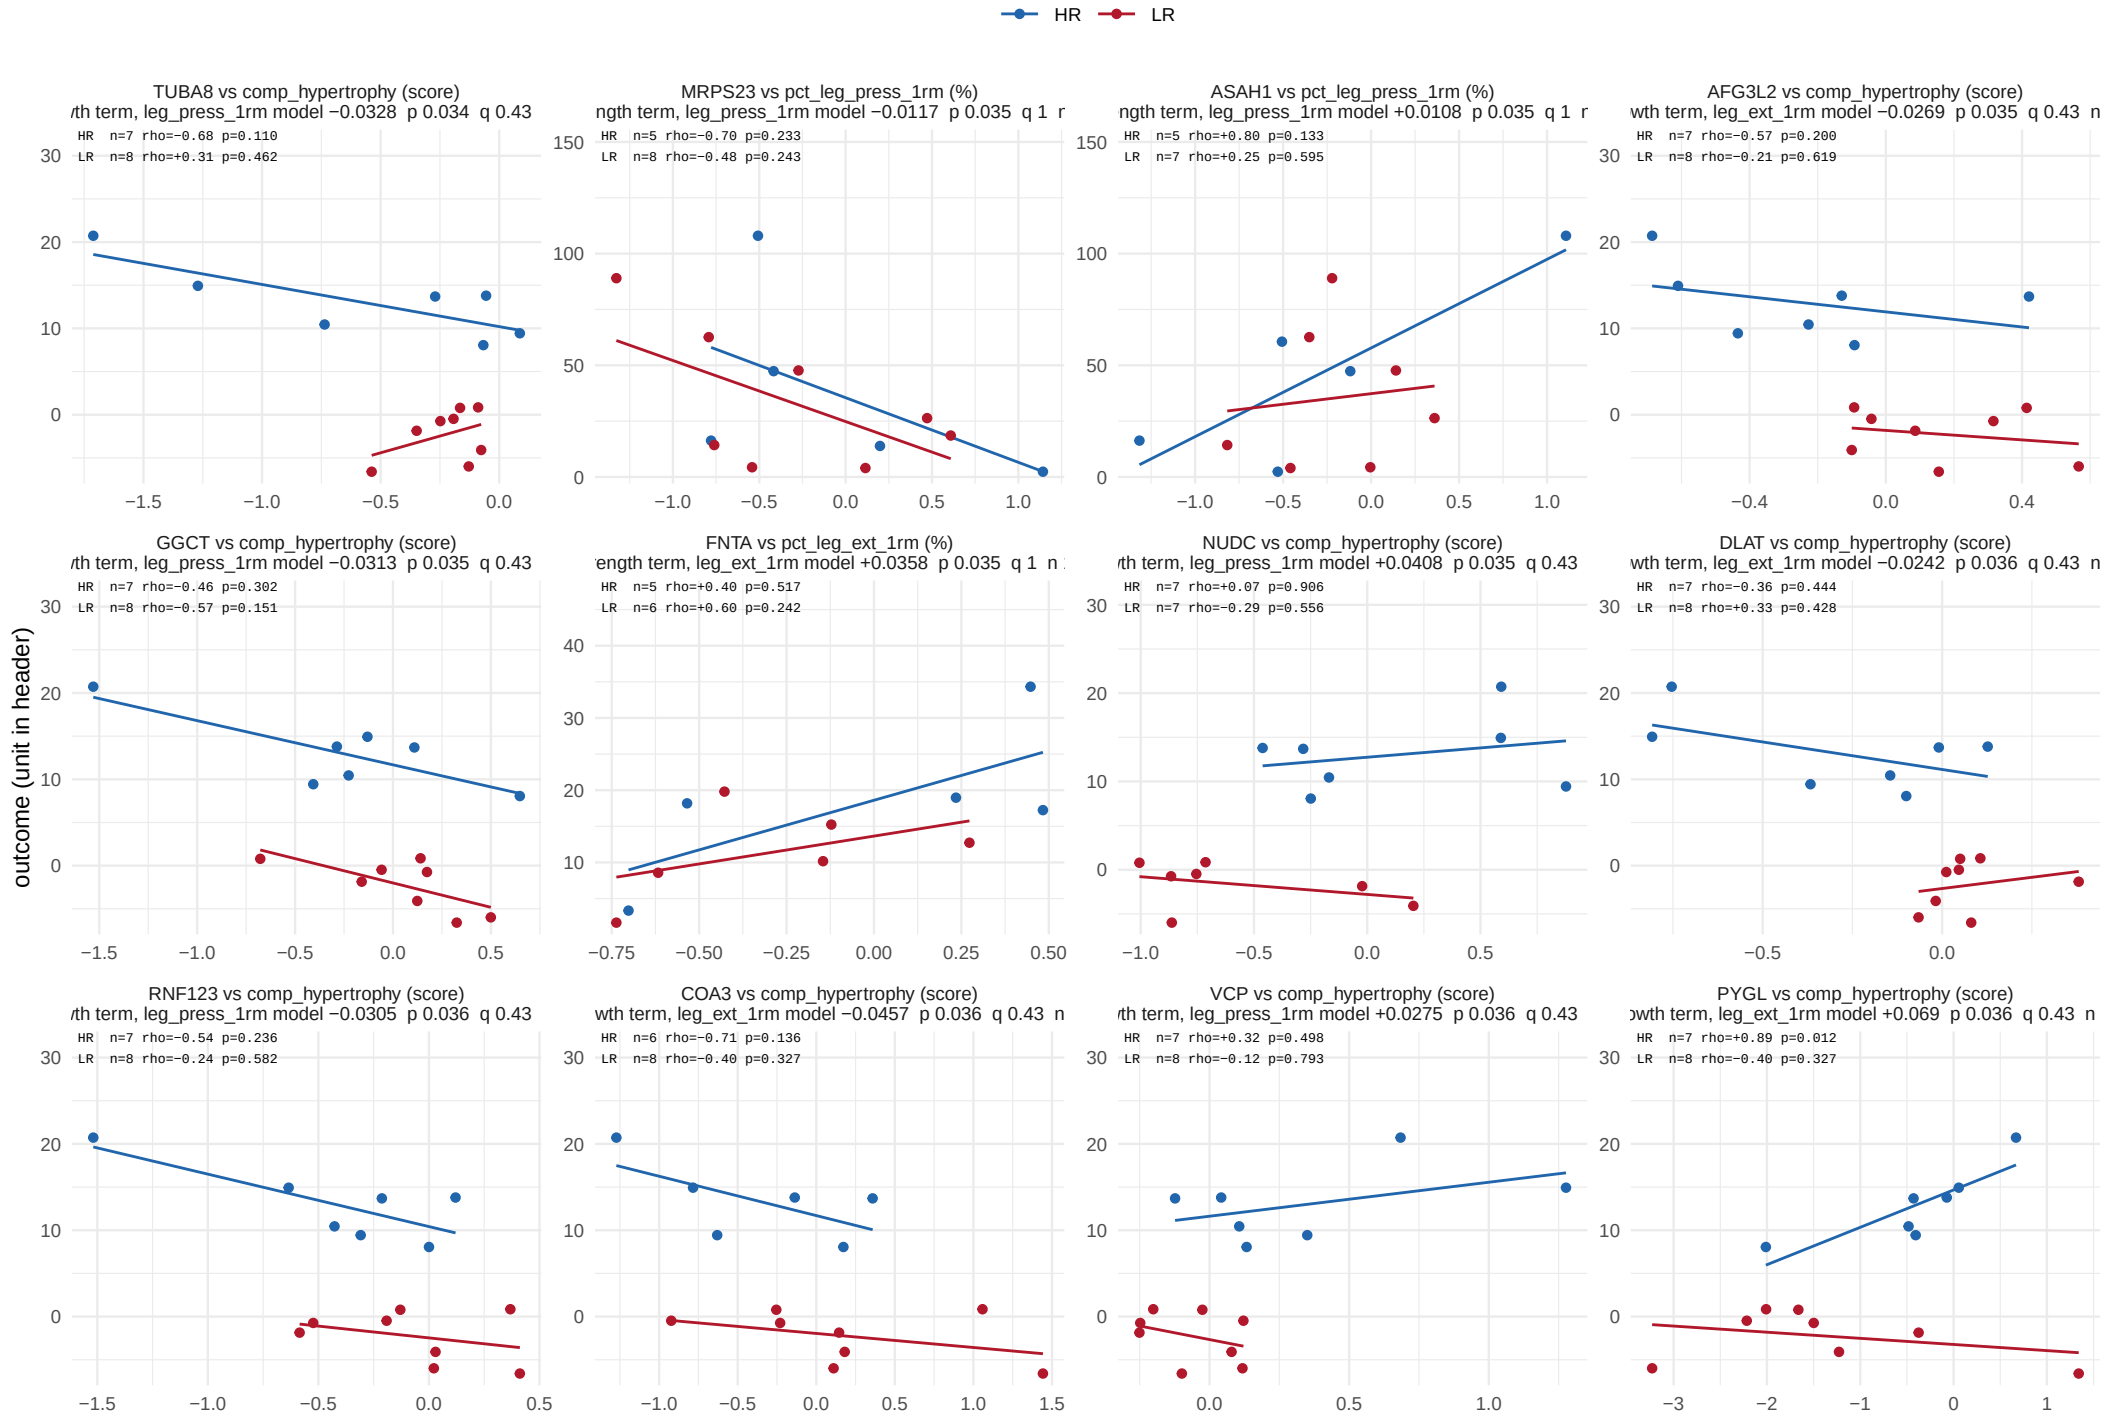


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, acute window

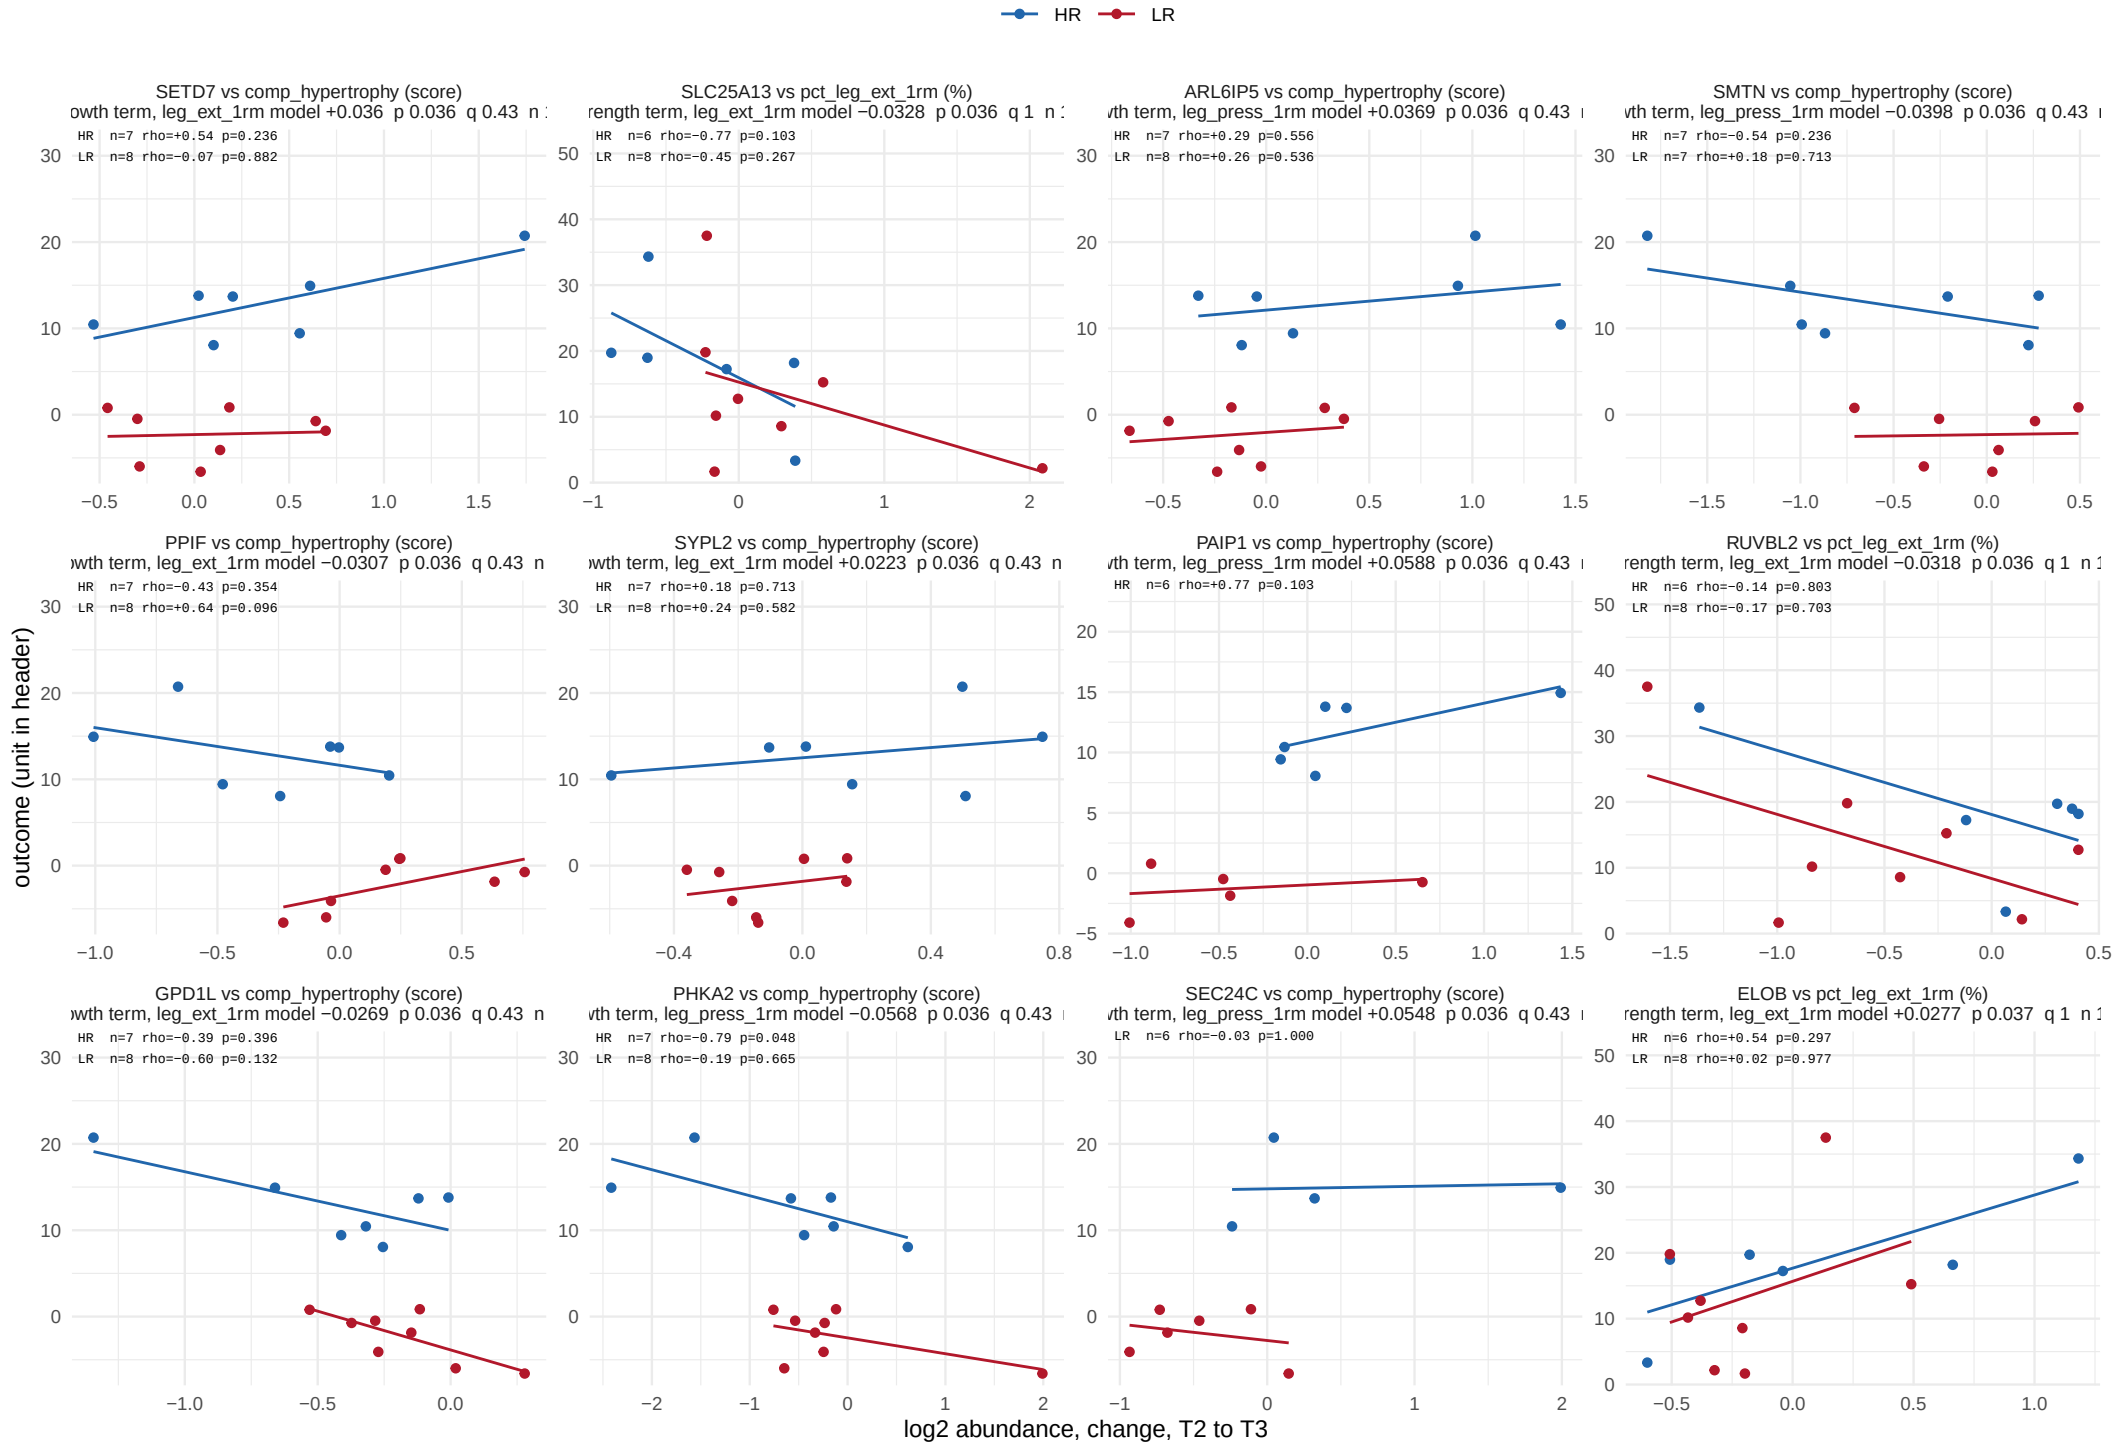


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, acute window

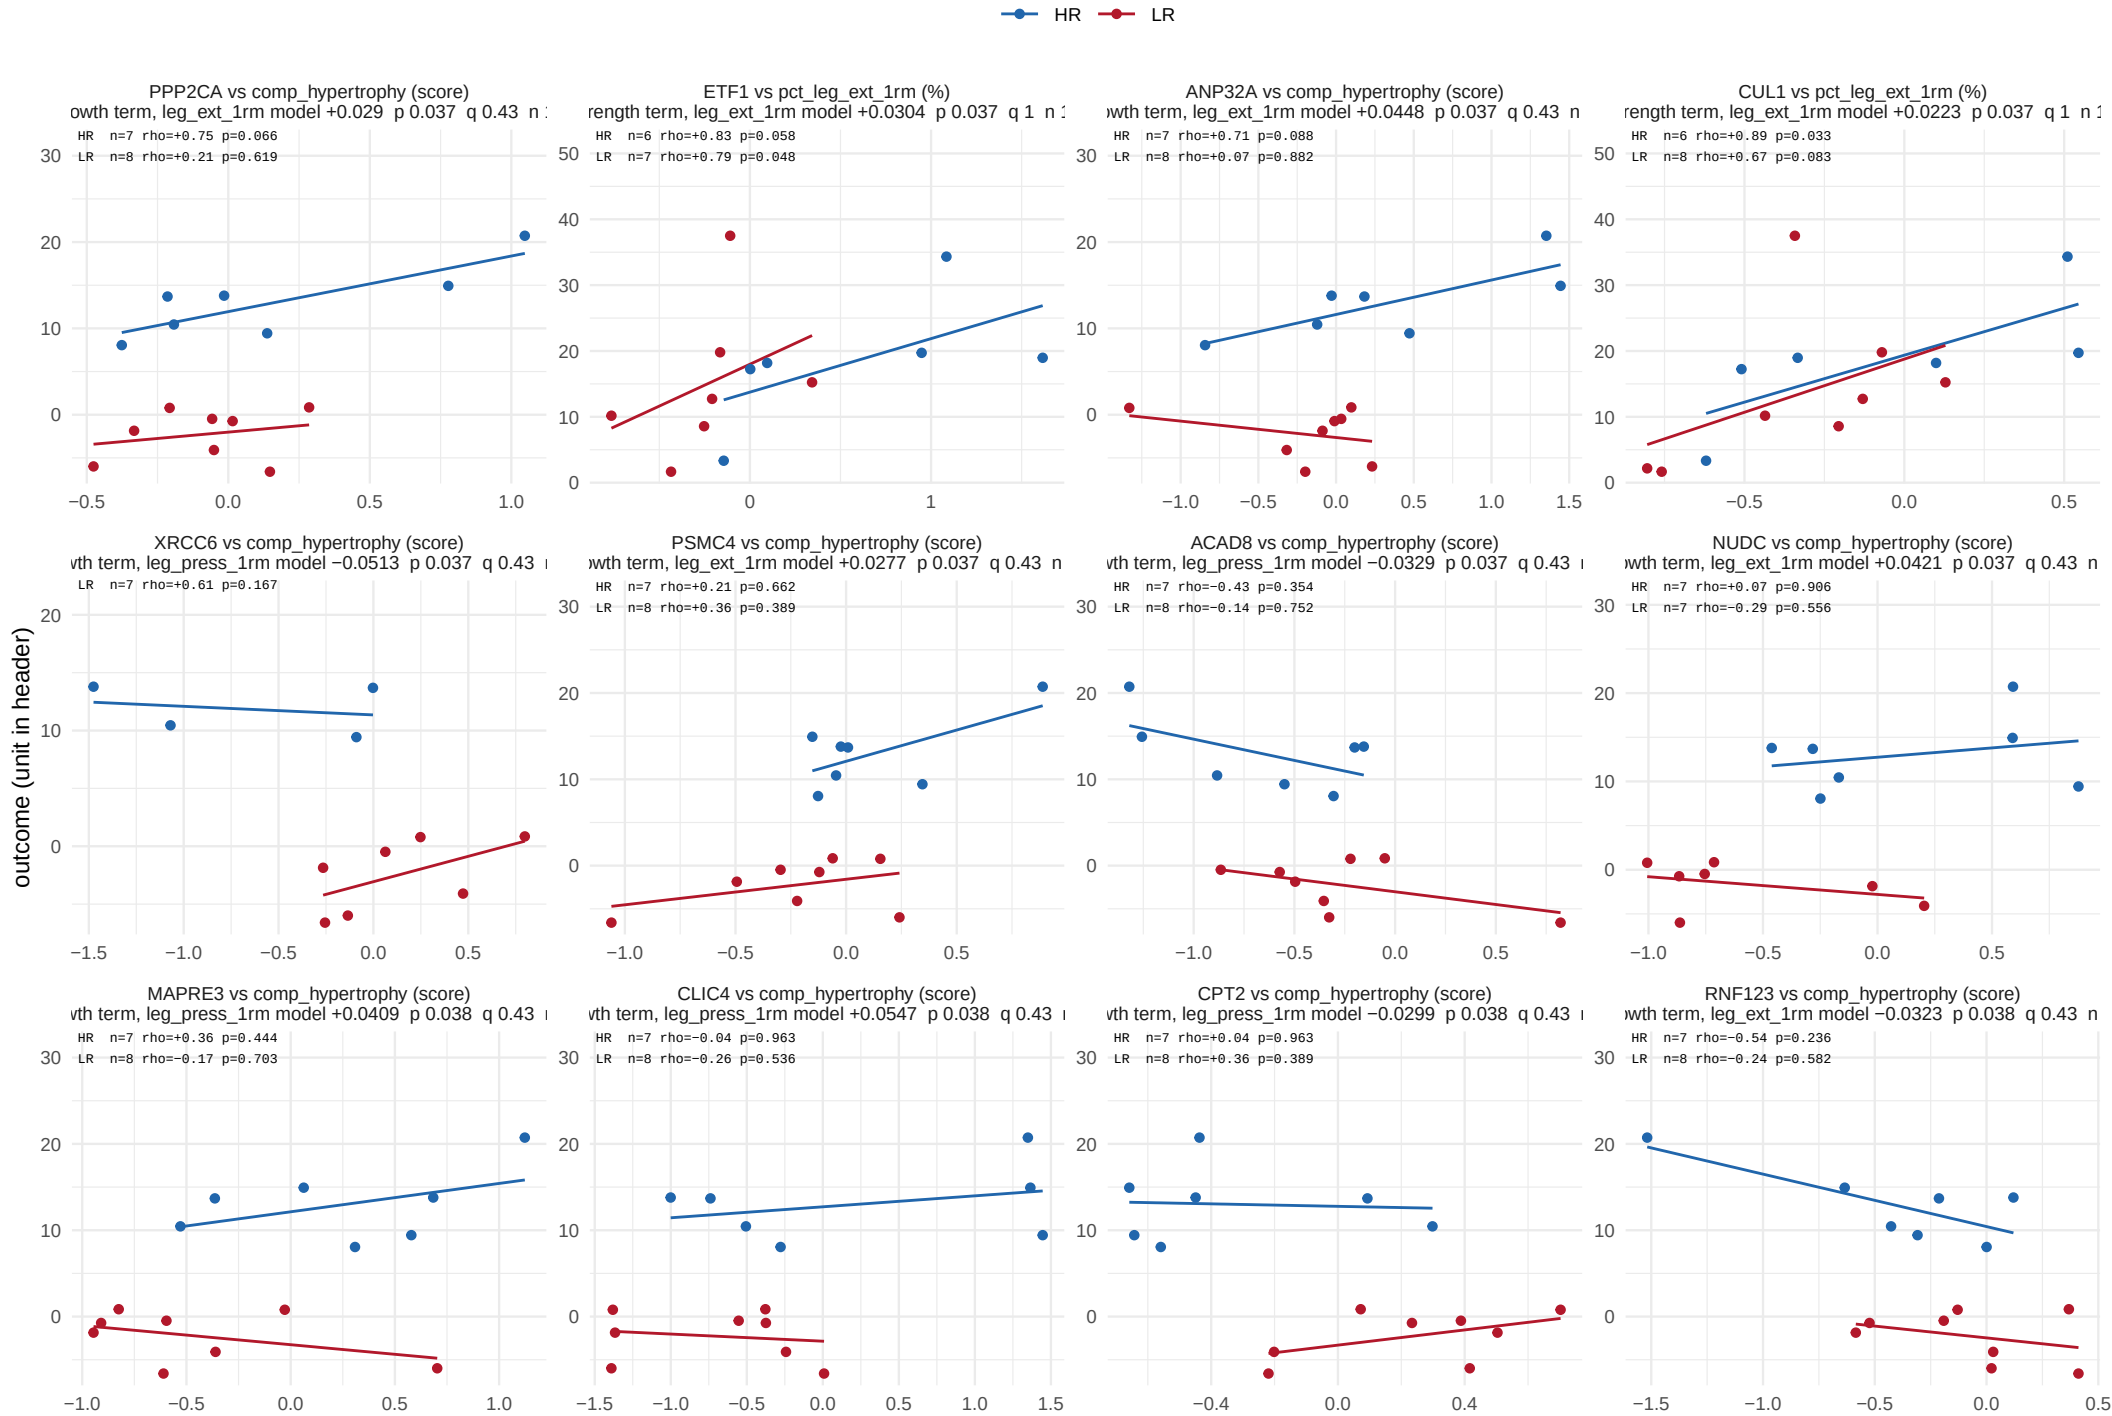

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.


Two predictor, acute window

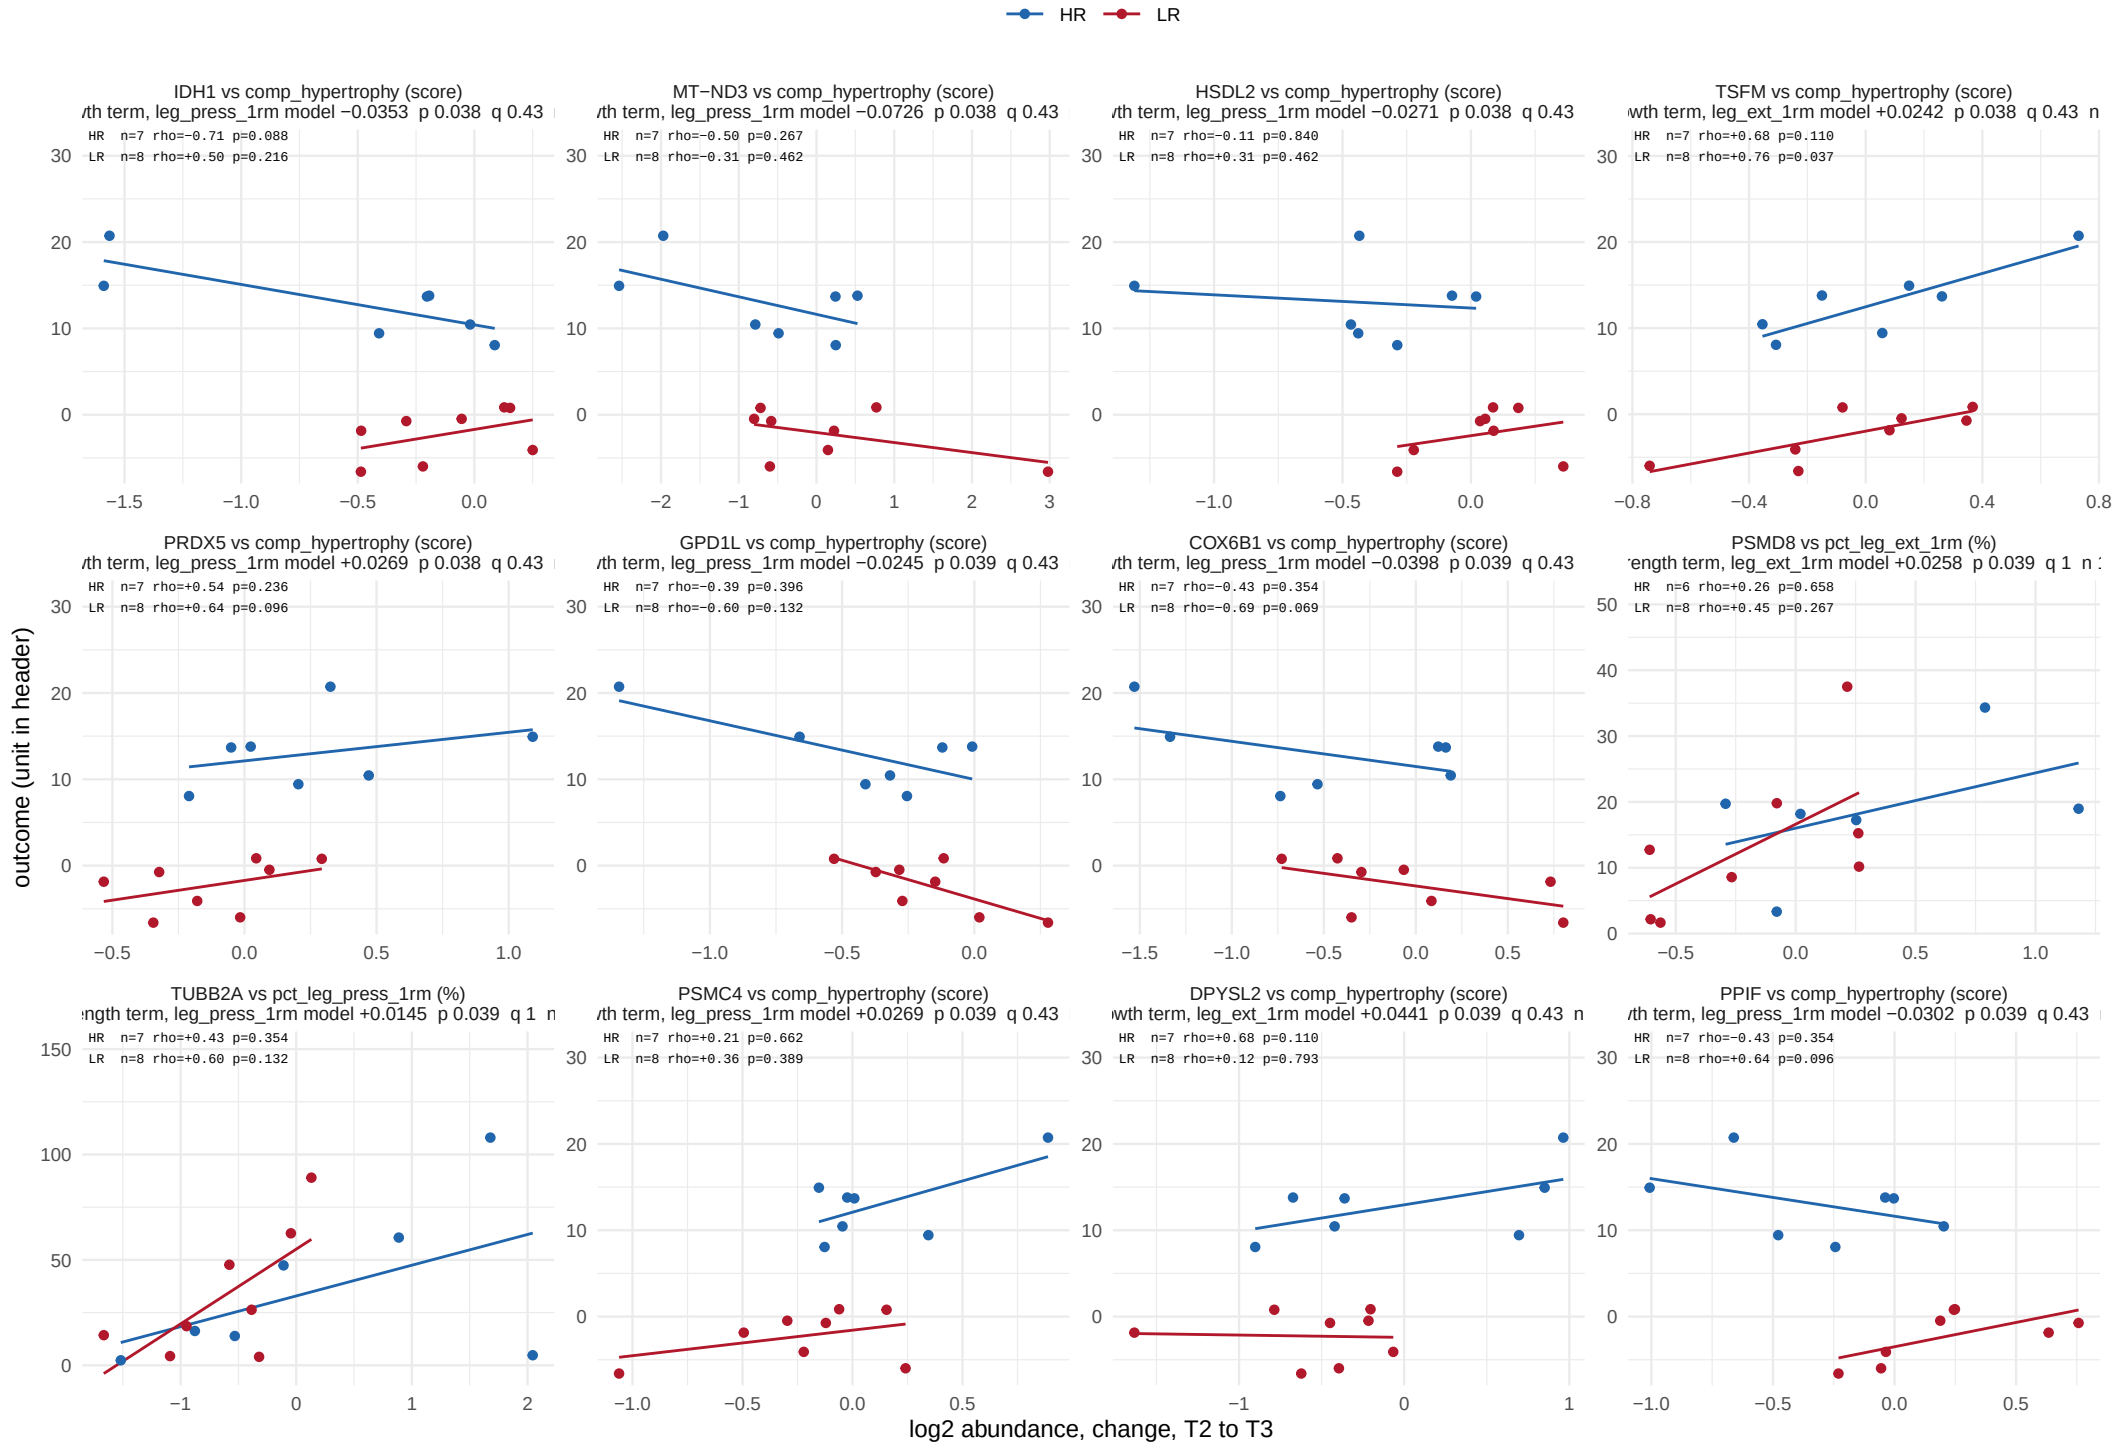

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.


Two predictor, acute window

378 of 5806 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 26 of 32.

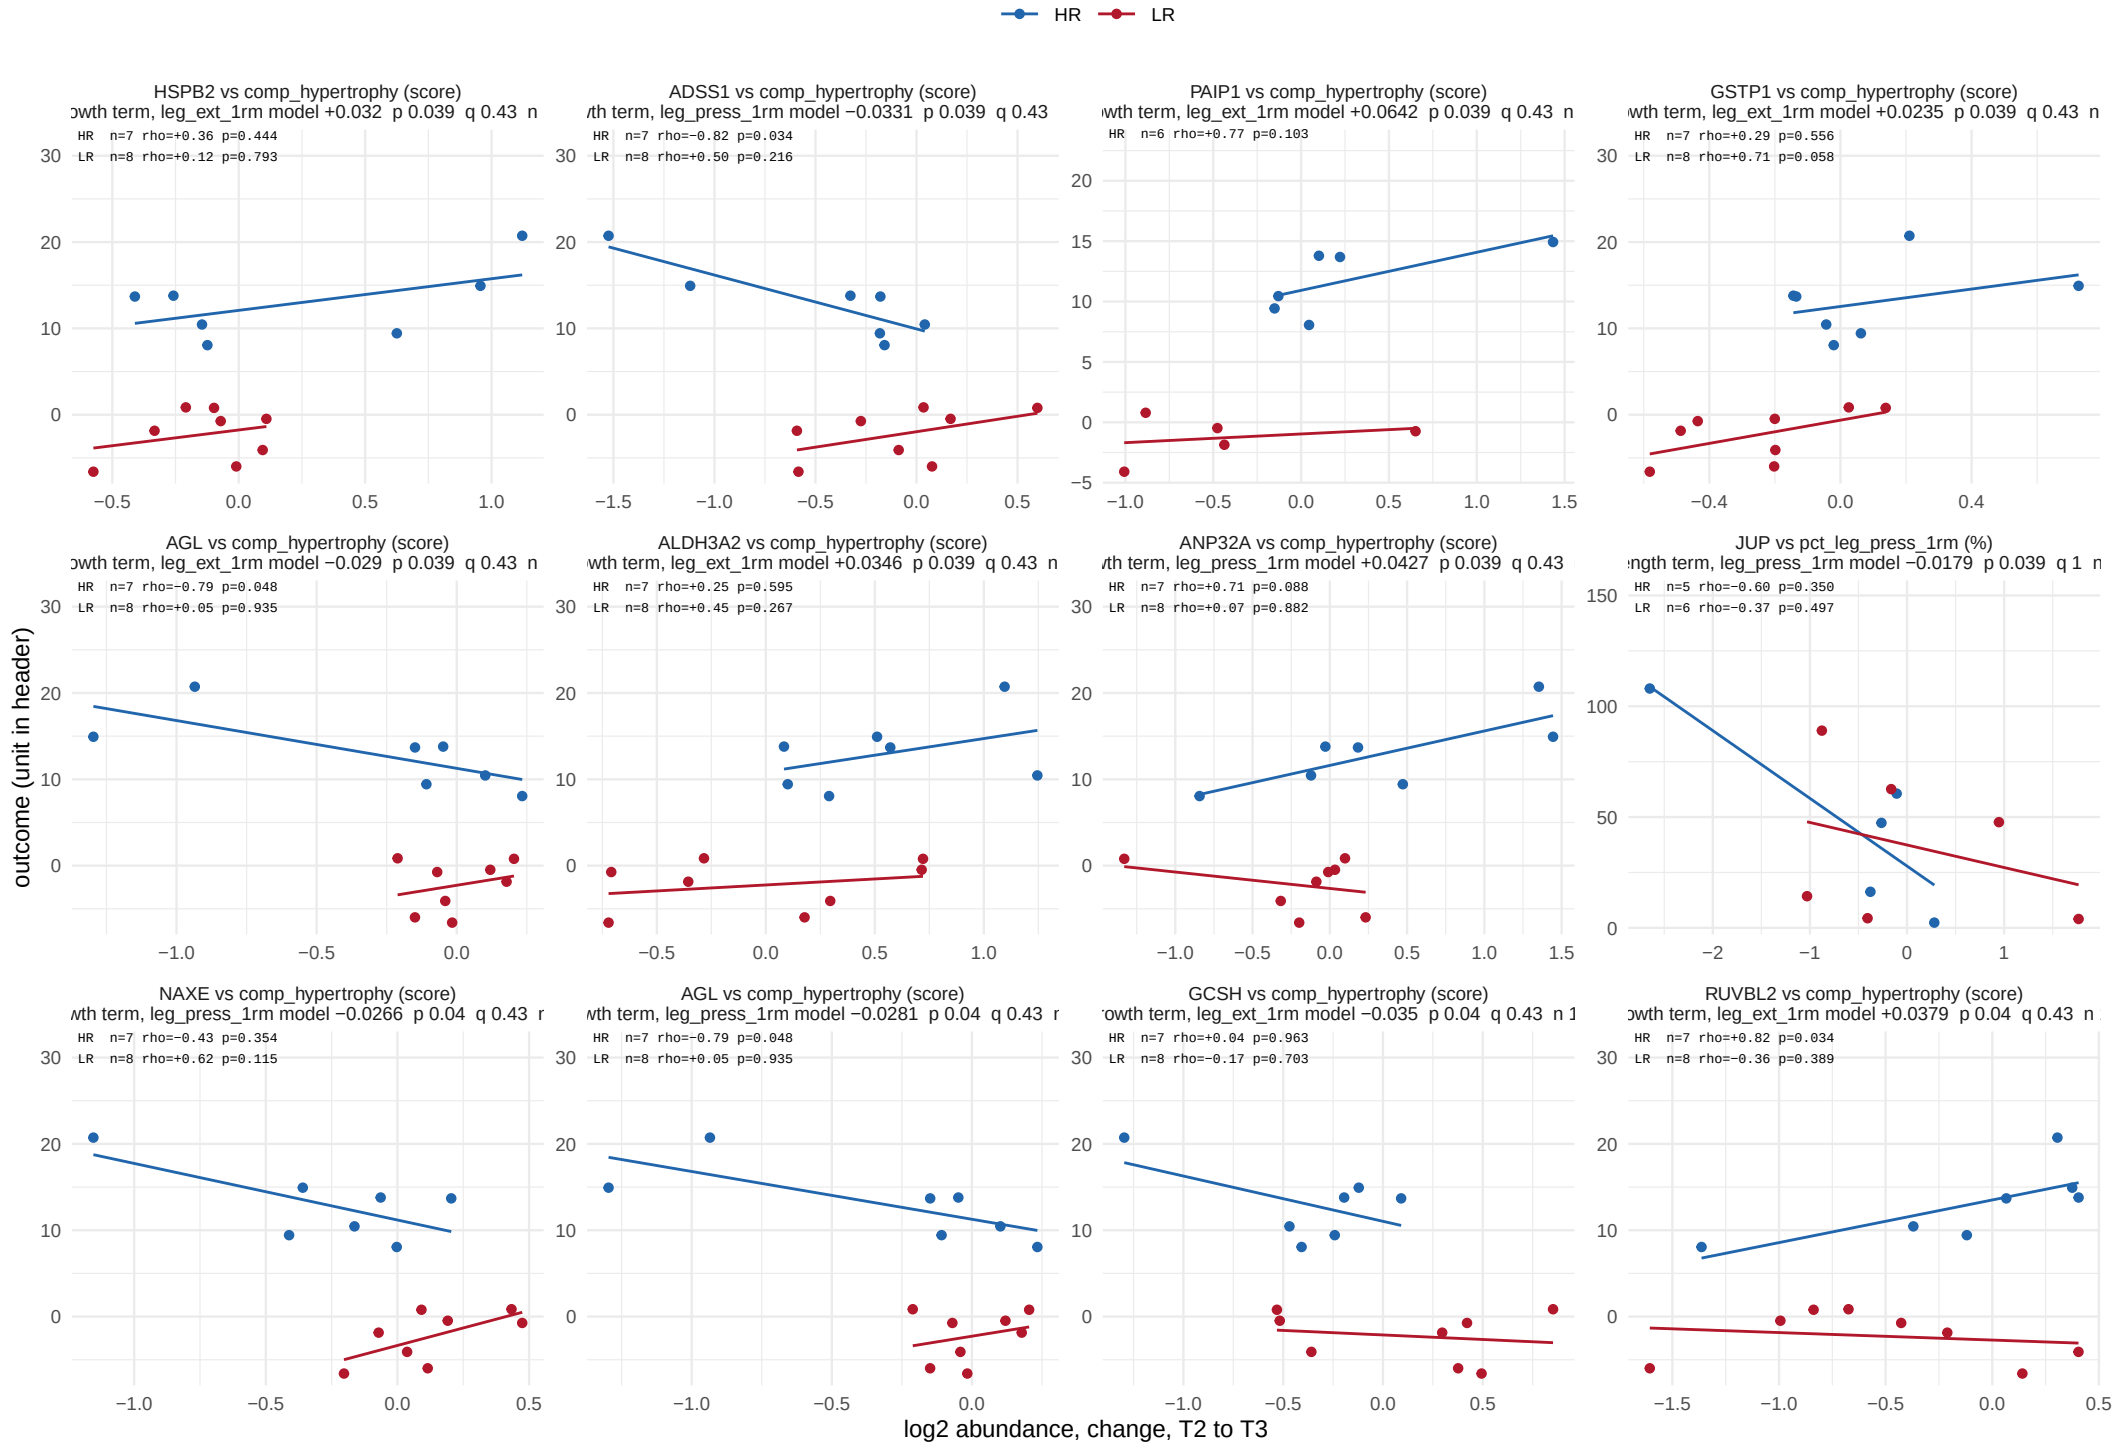


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, acute window

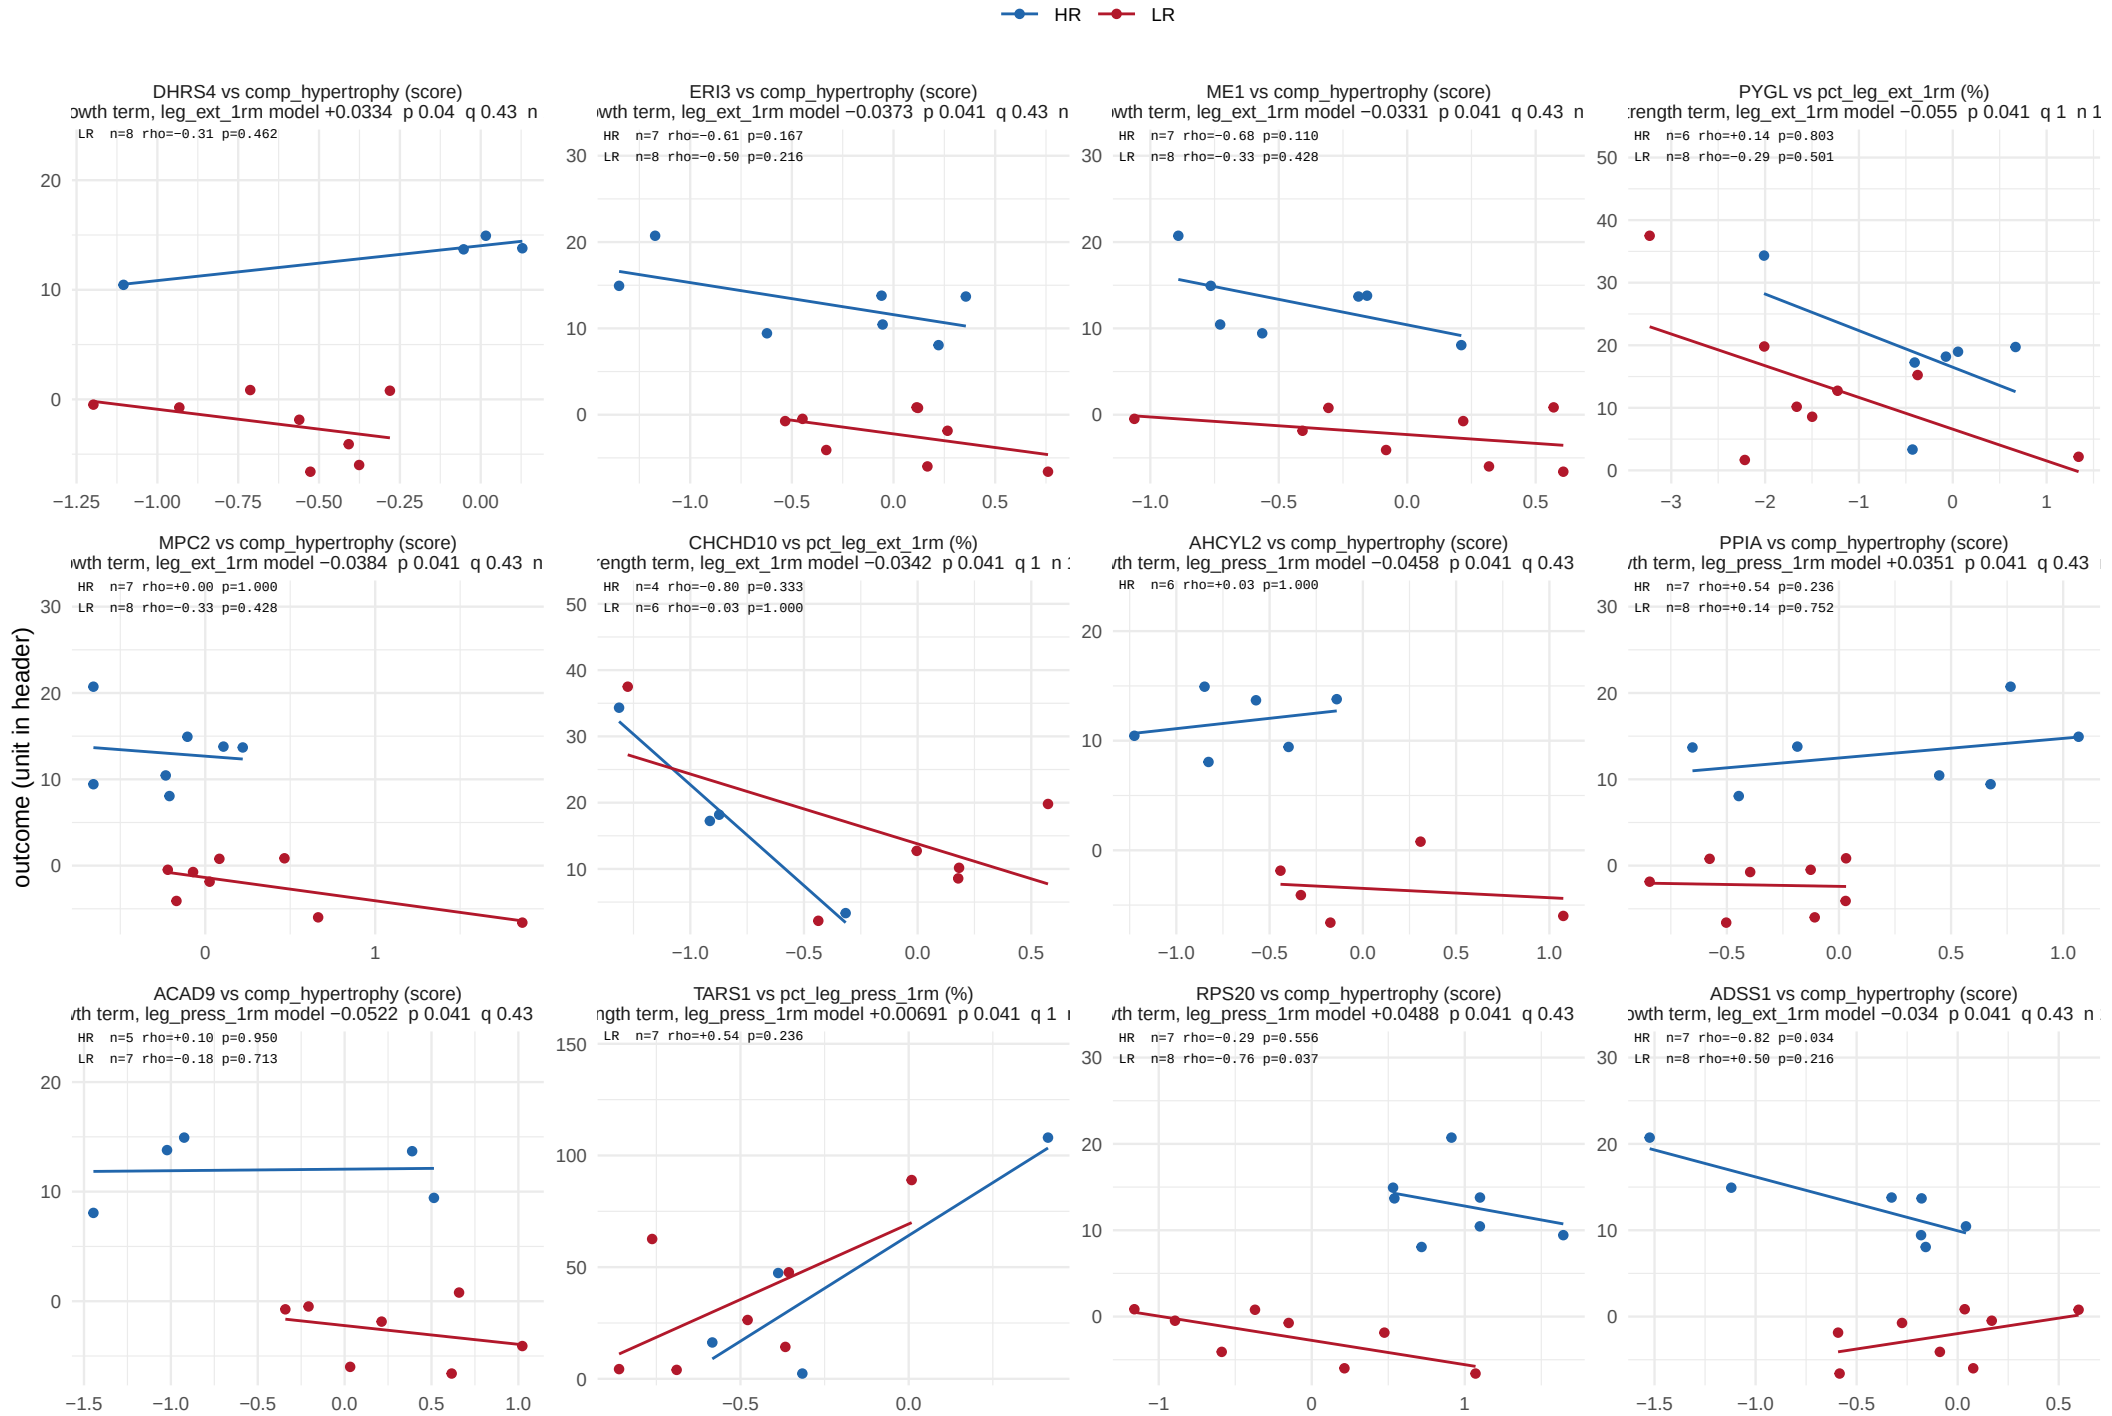

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.


Two predictor, acute window

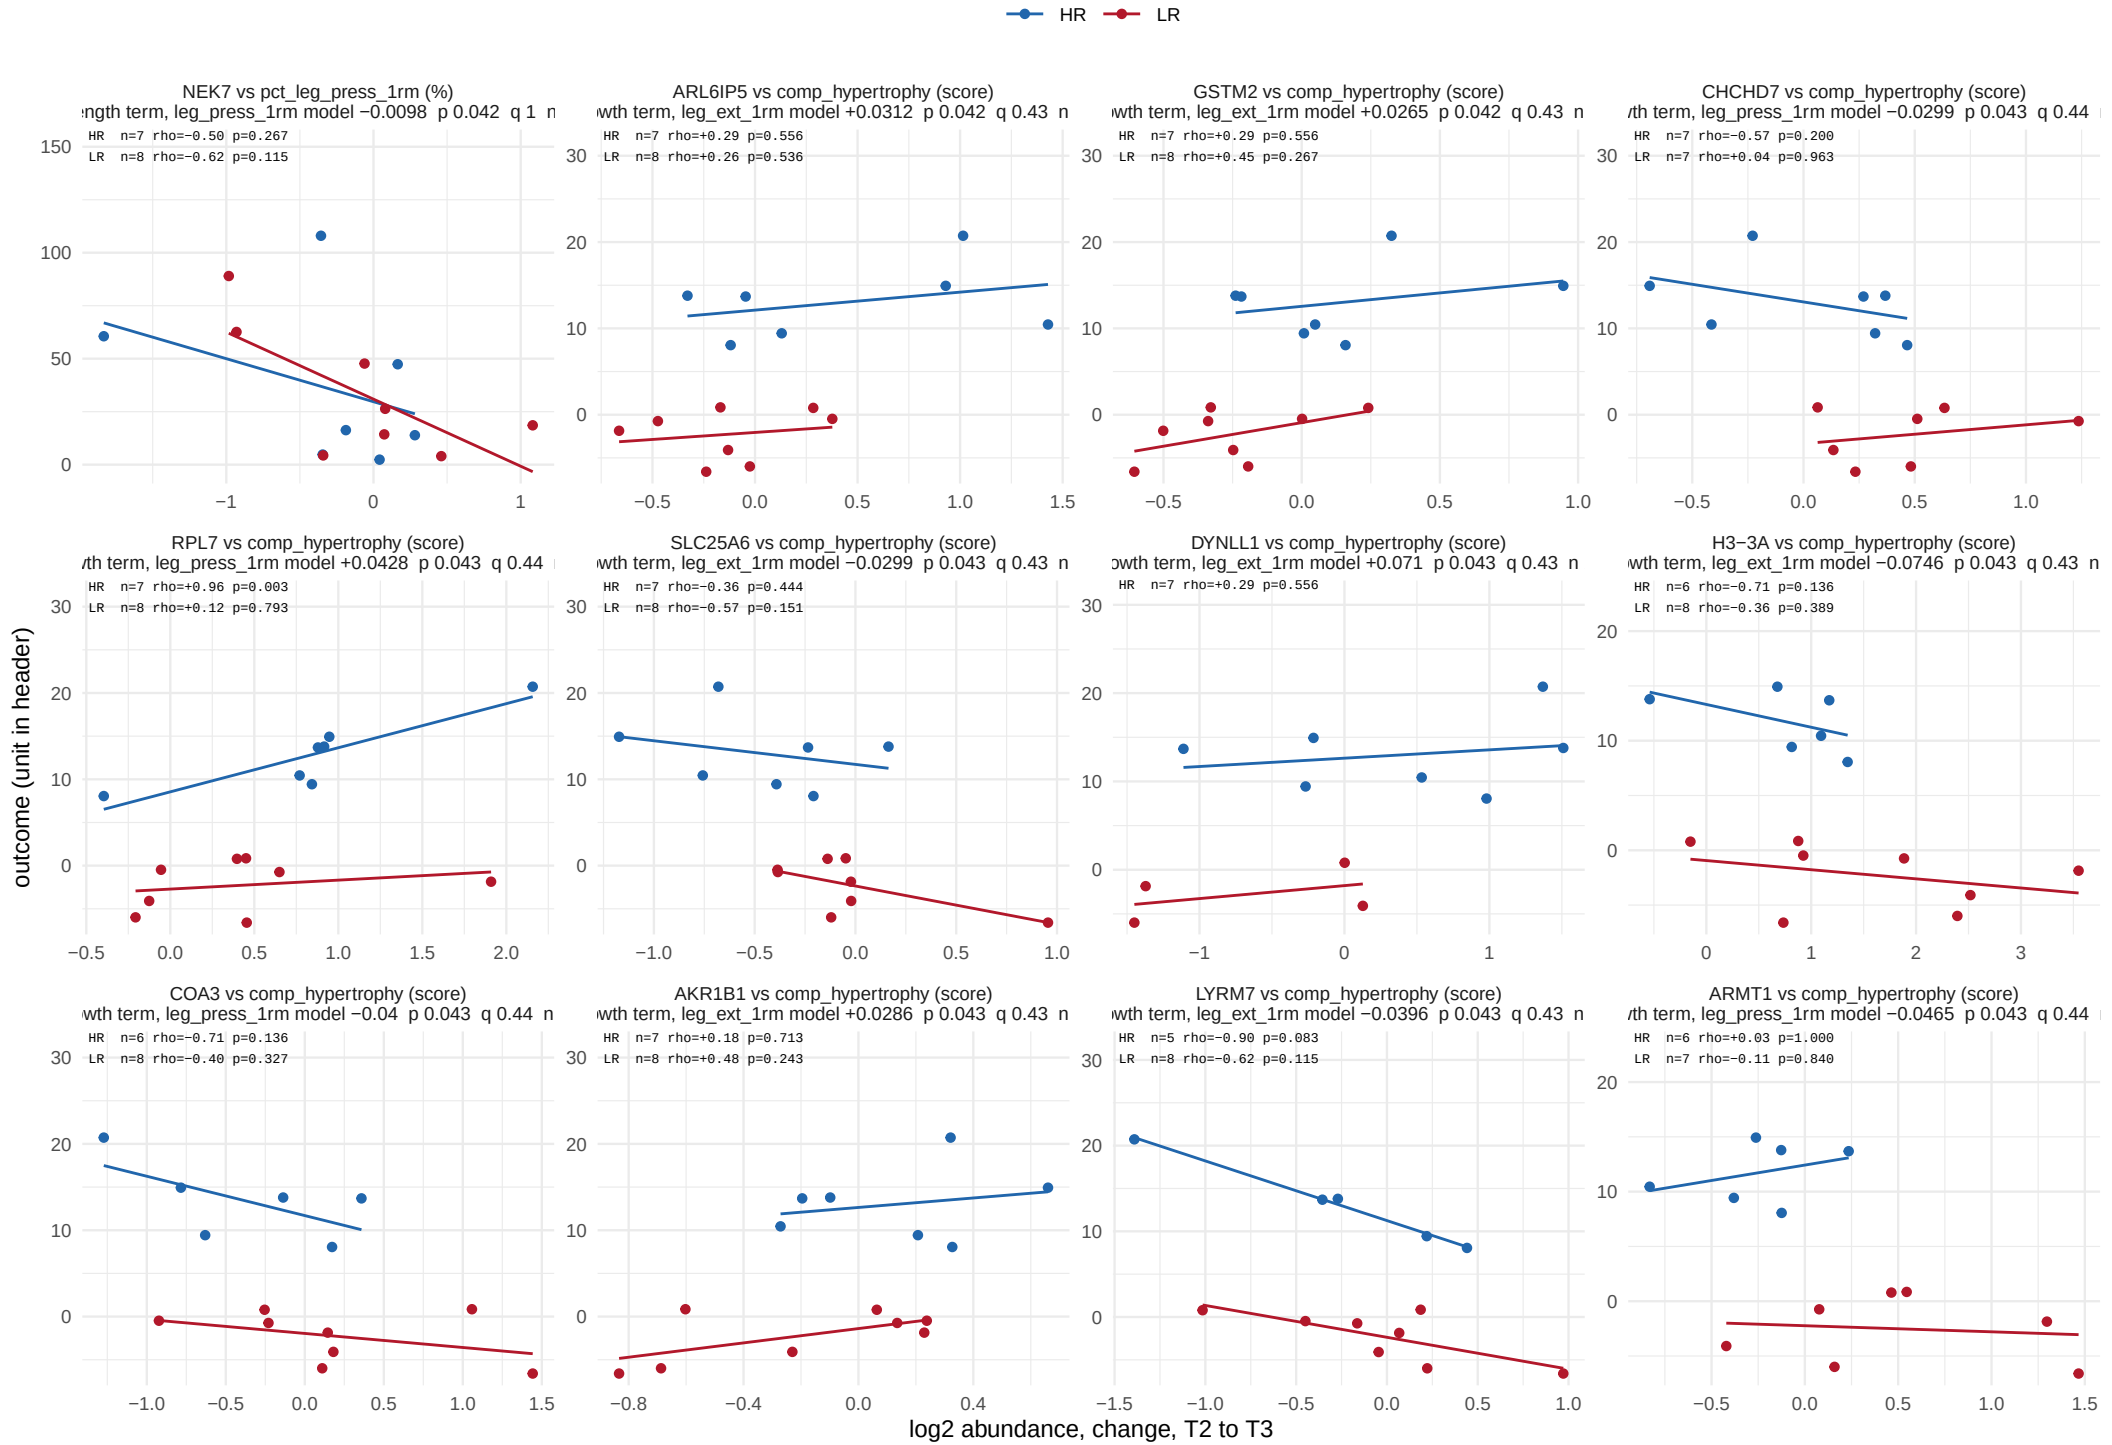

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.


Two predictor, acute window

378 of 5806 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 29 of 32.

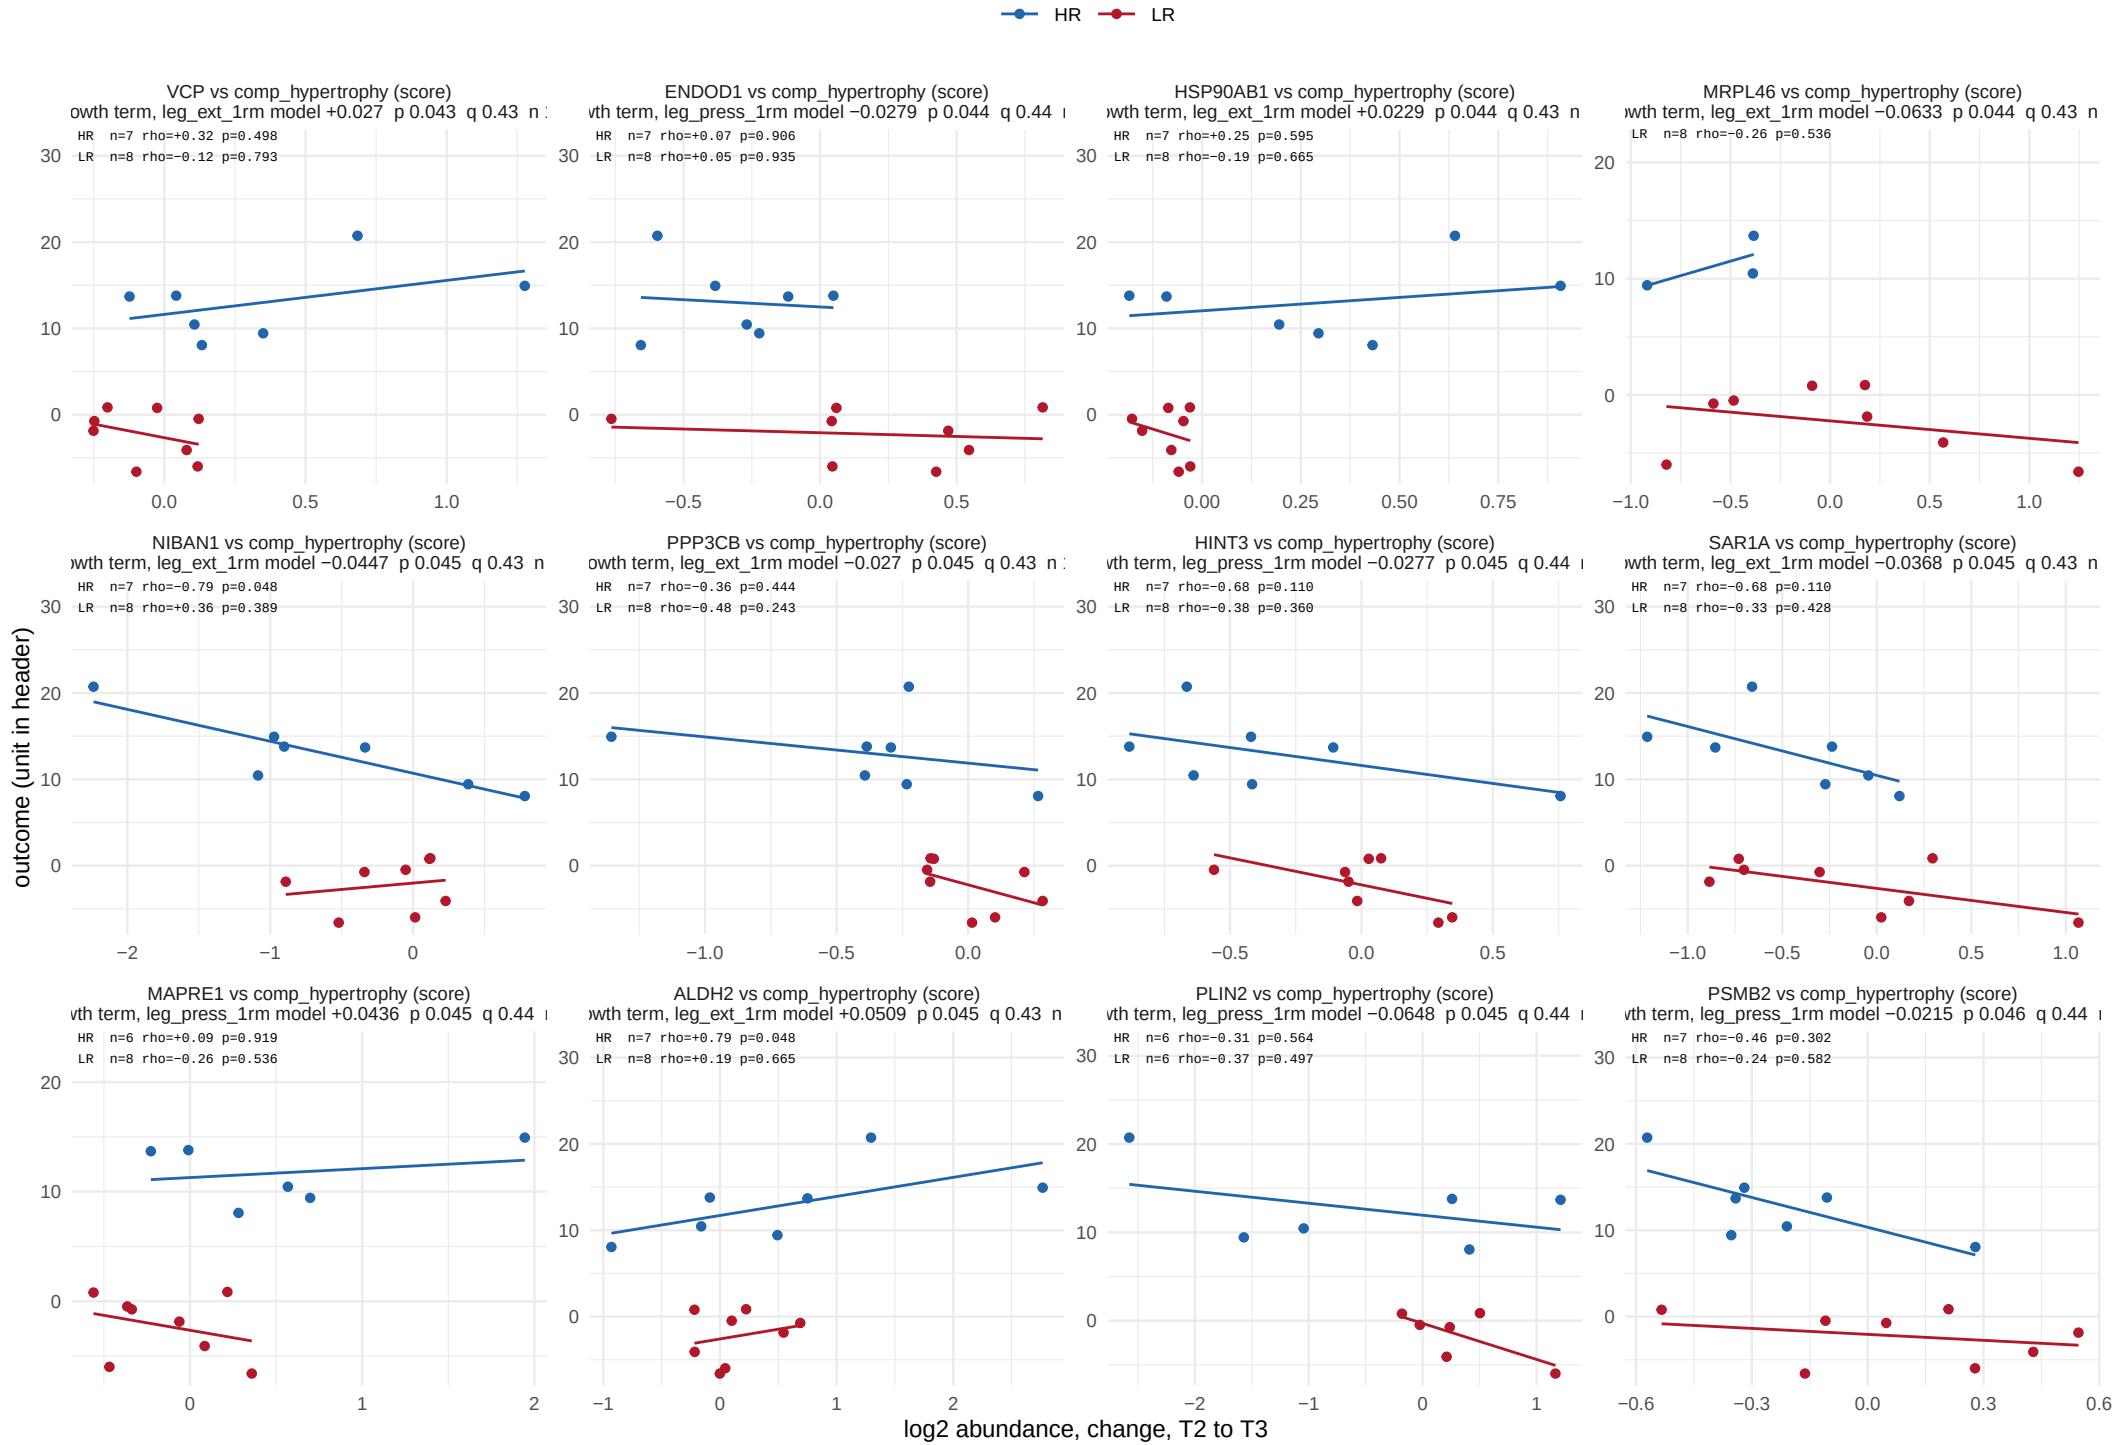


One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, acute window

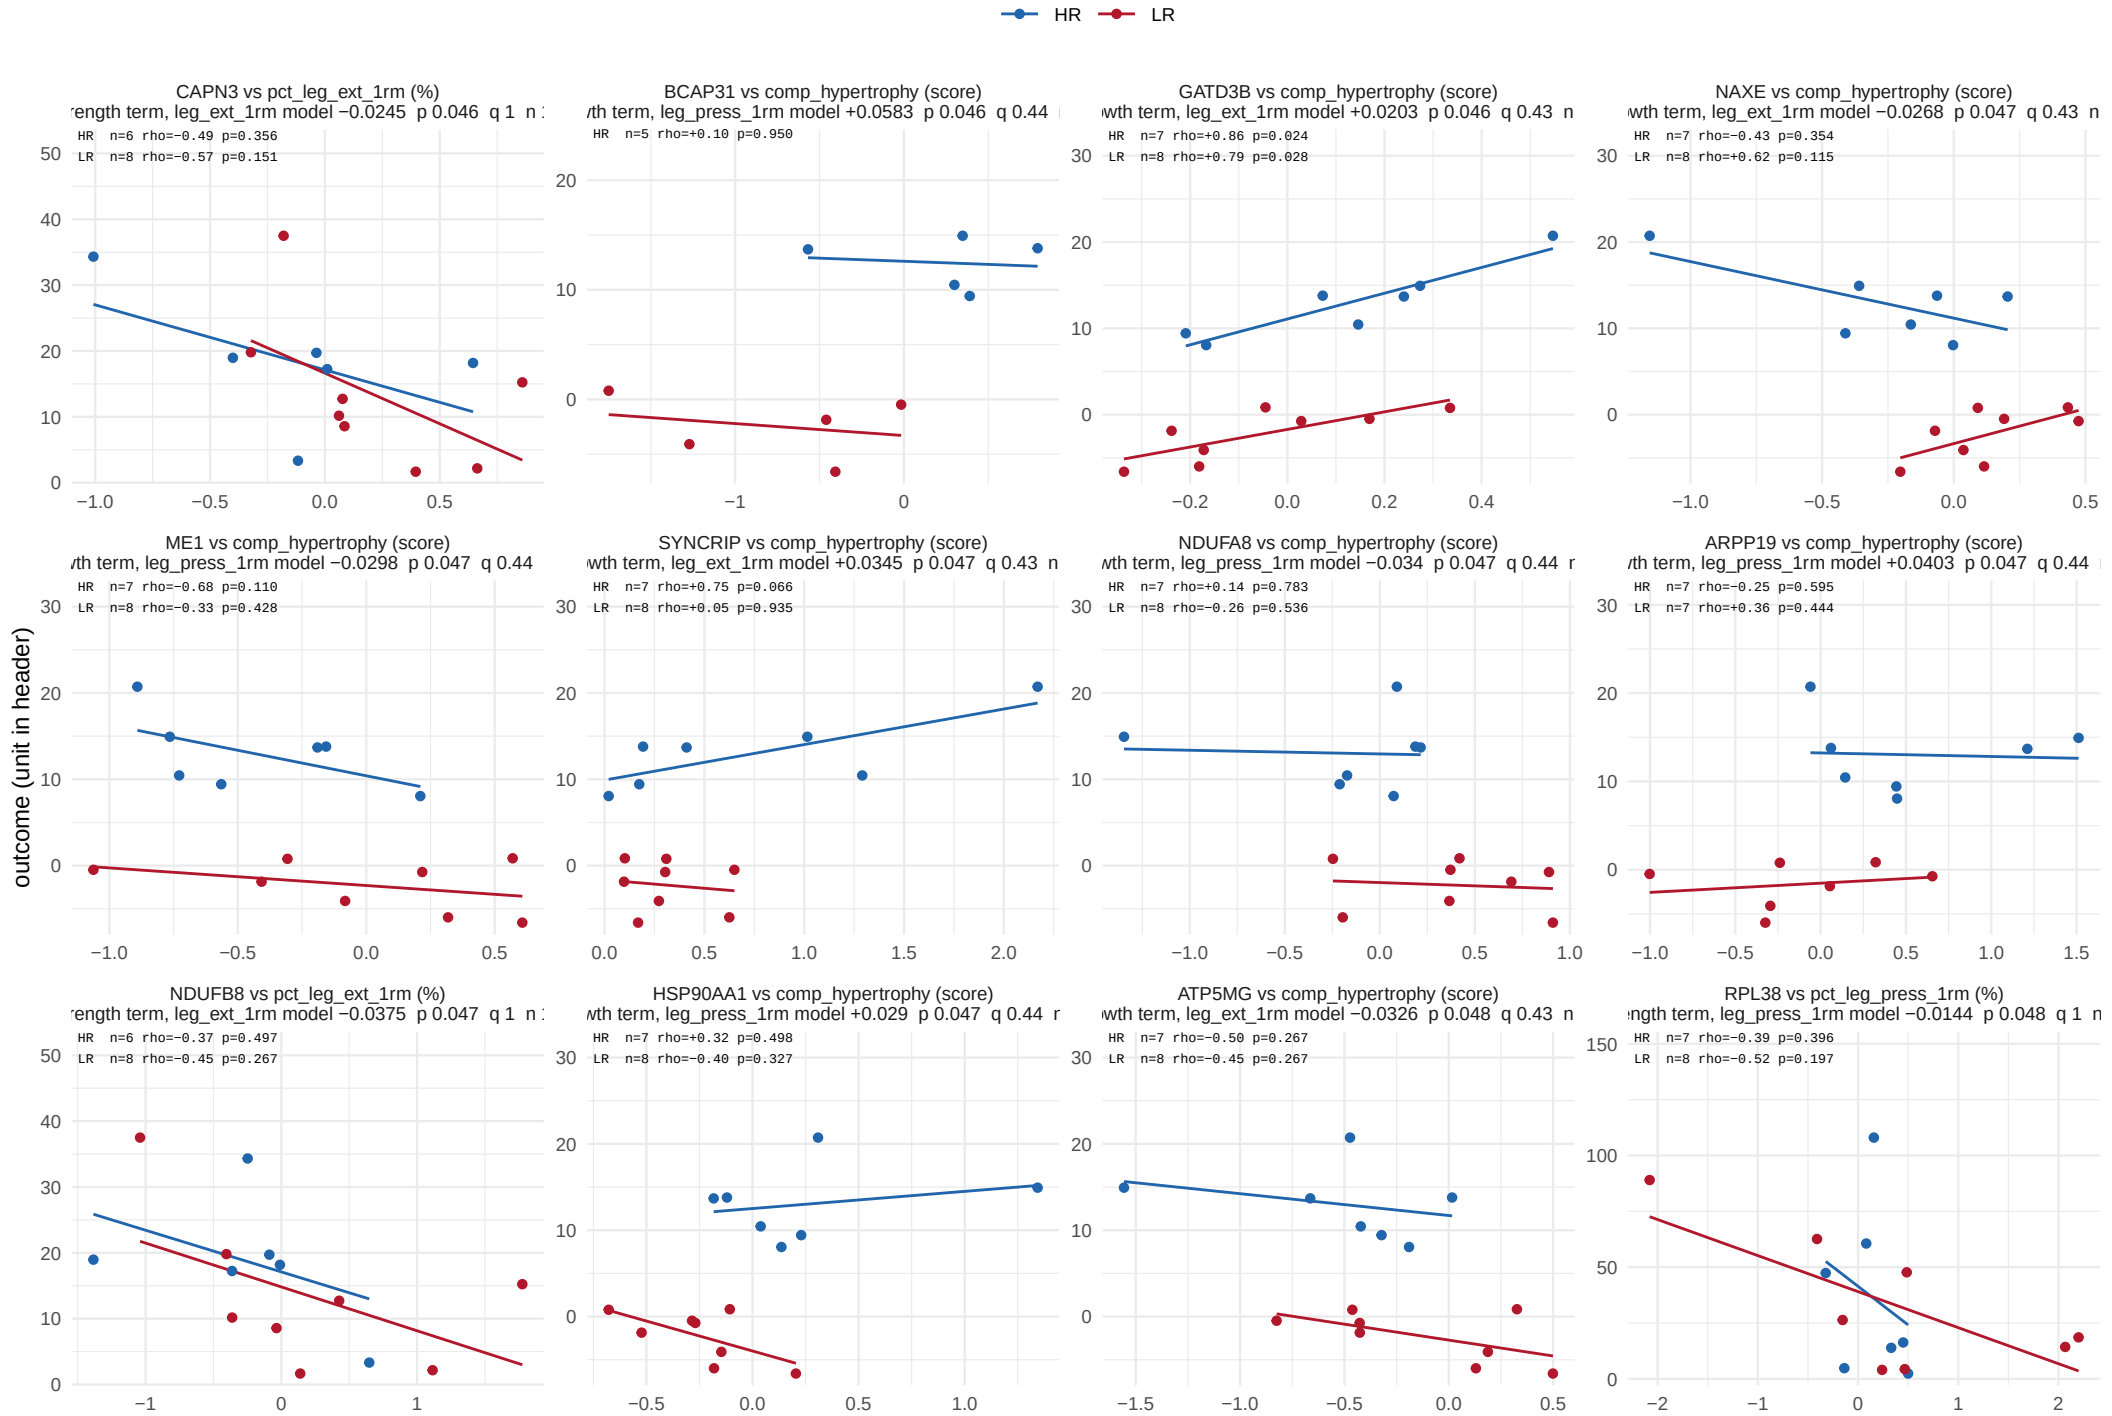

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.


Two predictor, acute window

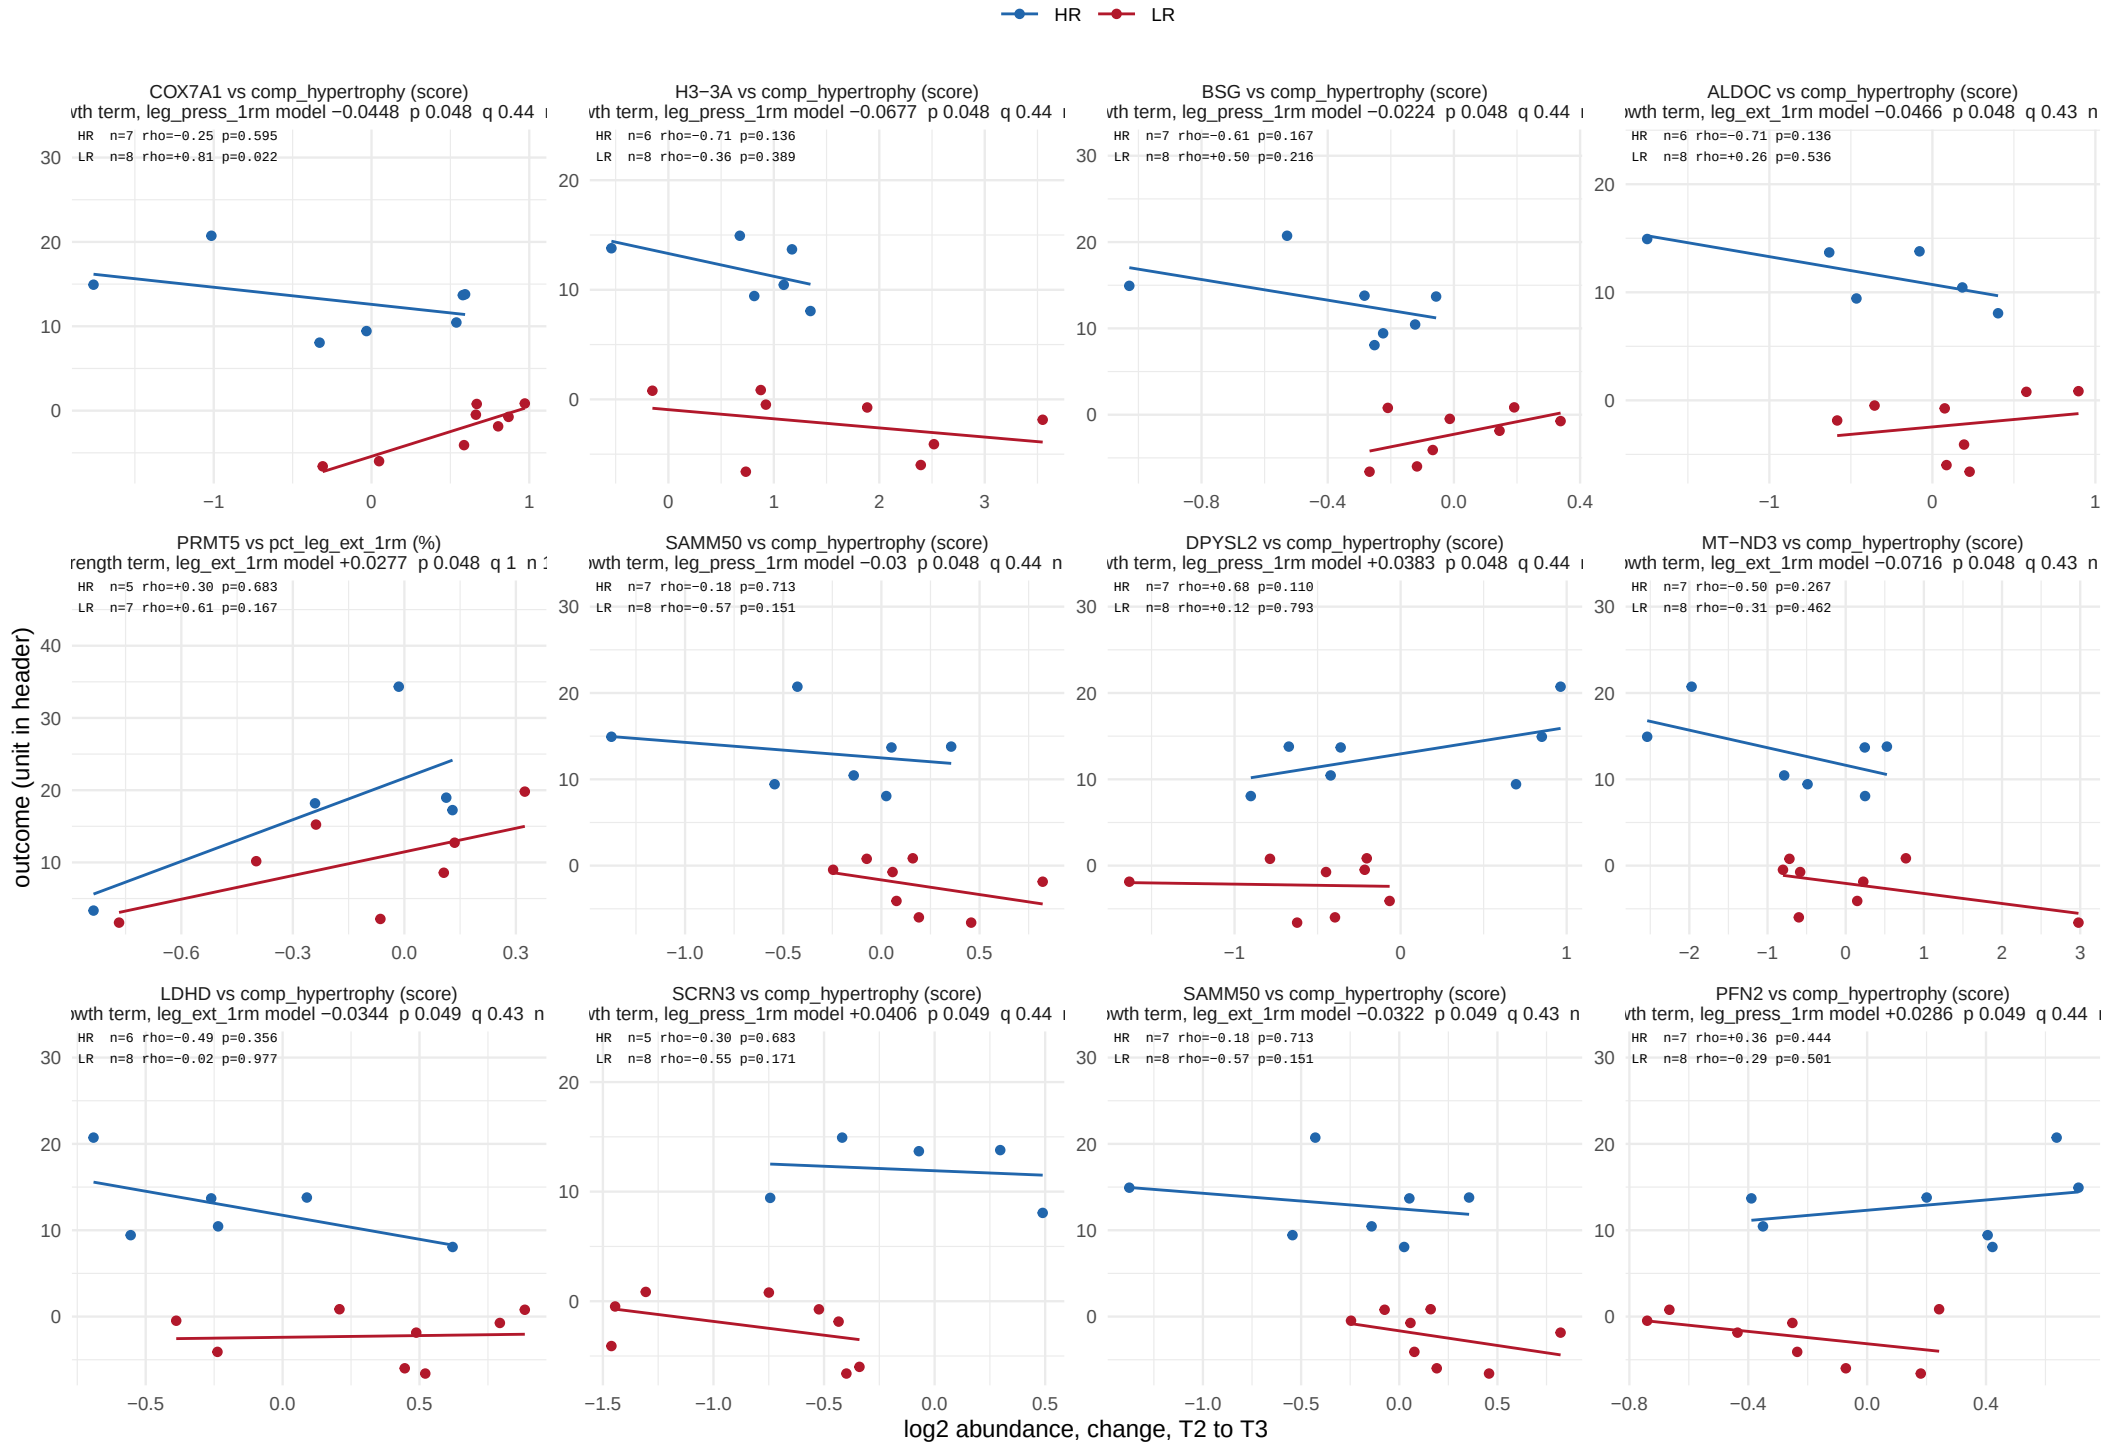

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.

Two predictor, acute window

378 of 5806 feature−outcome pairs at p < 0.05, 0 at BH < 0.05. Page 32 of 32.

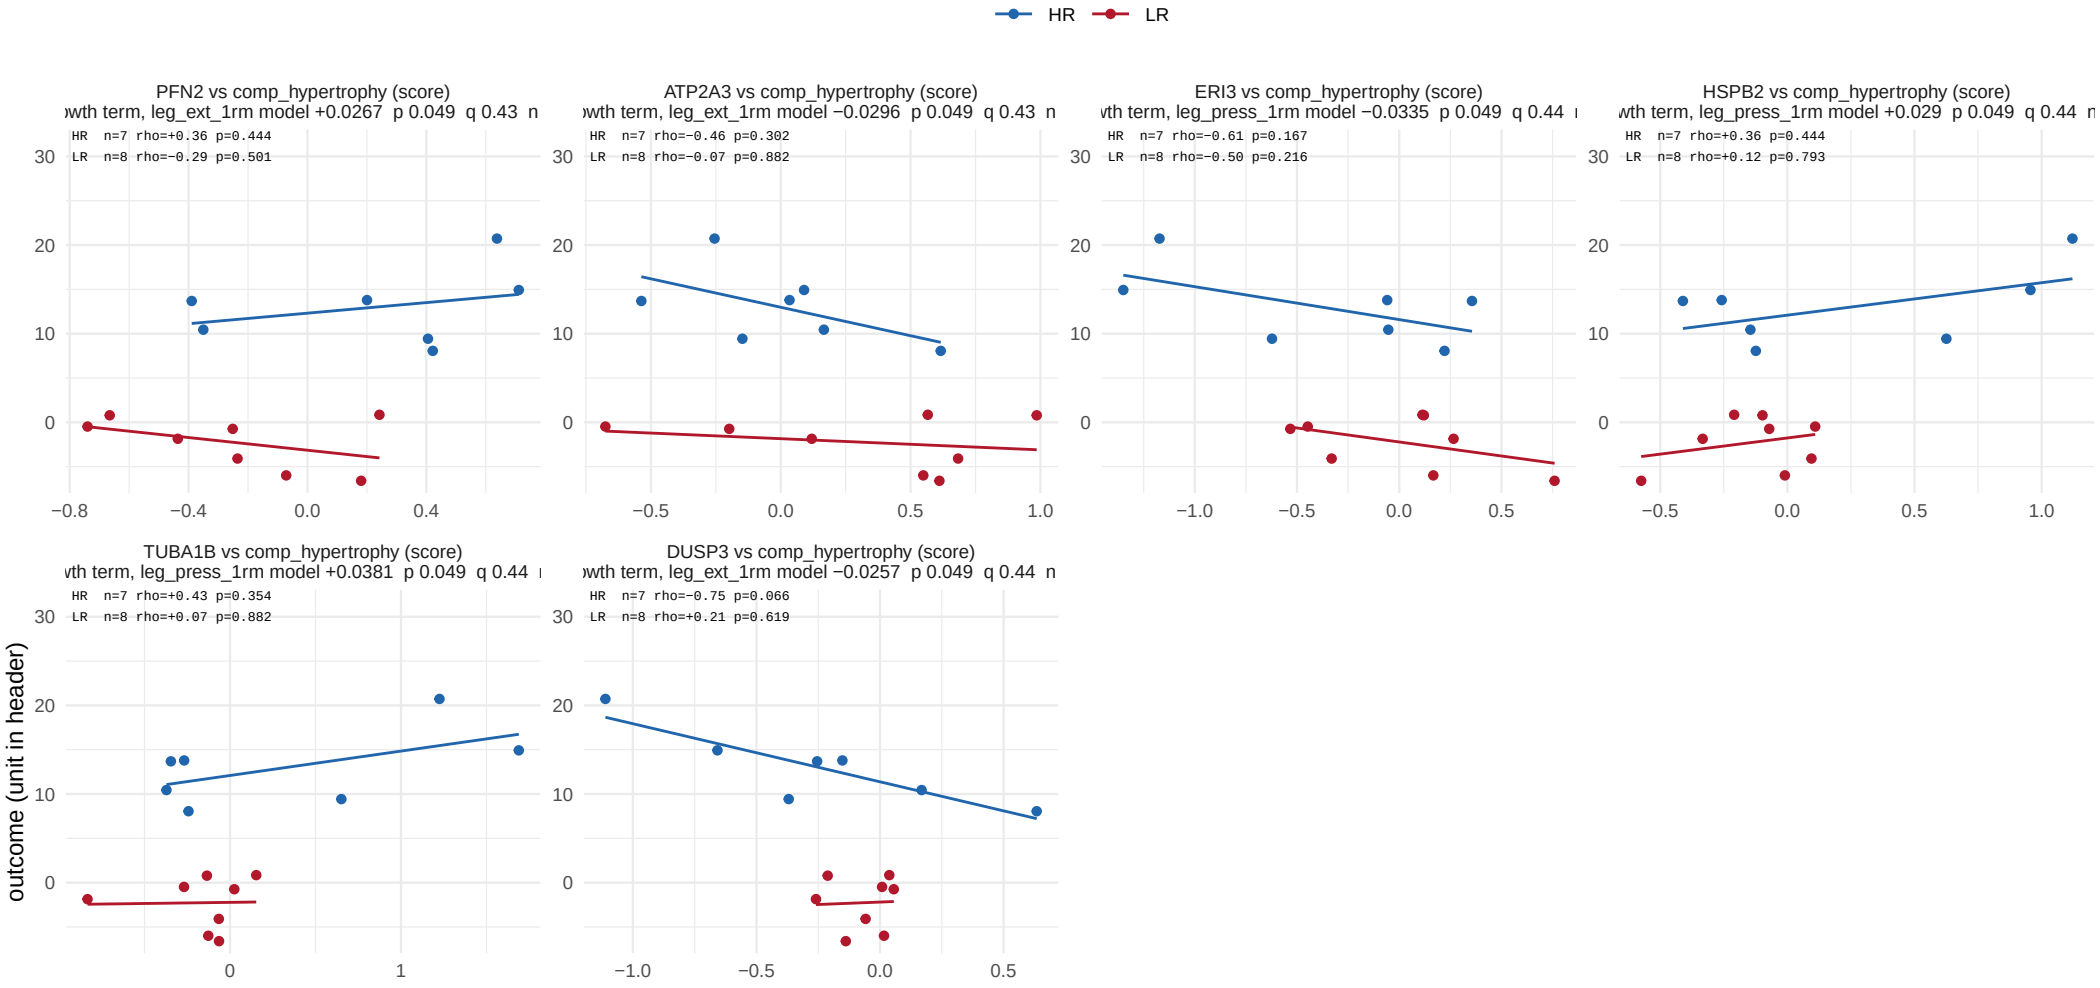

One point per subject. Header: the growth or strength coefficient from limma, feature ~ comp_hypertrophy + strength gain, each adjusted for the other, with p, BH q within window, strength test, term, and the subjects used. The x axis shows the term's own outcome; the drawing does not hold the other predictor fixed. Corner: each arm's Spearman rho and exact p. Table: c_data/04_associate.xlsx, two_predictor.