
fcsa_mixed, between−person term


63 of 1378 sets at p < 0.05, 0 at BH < 0.05.

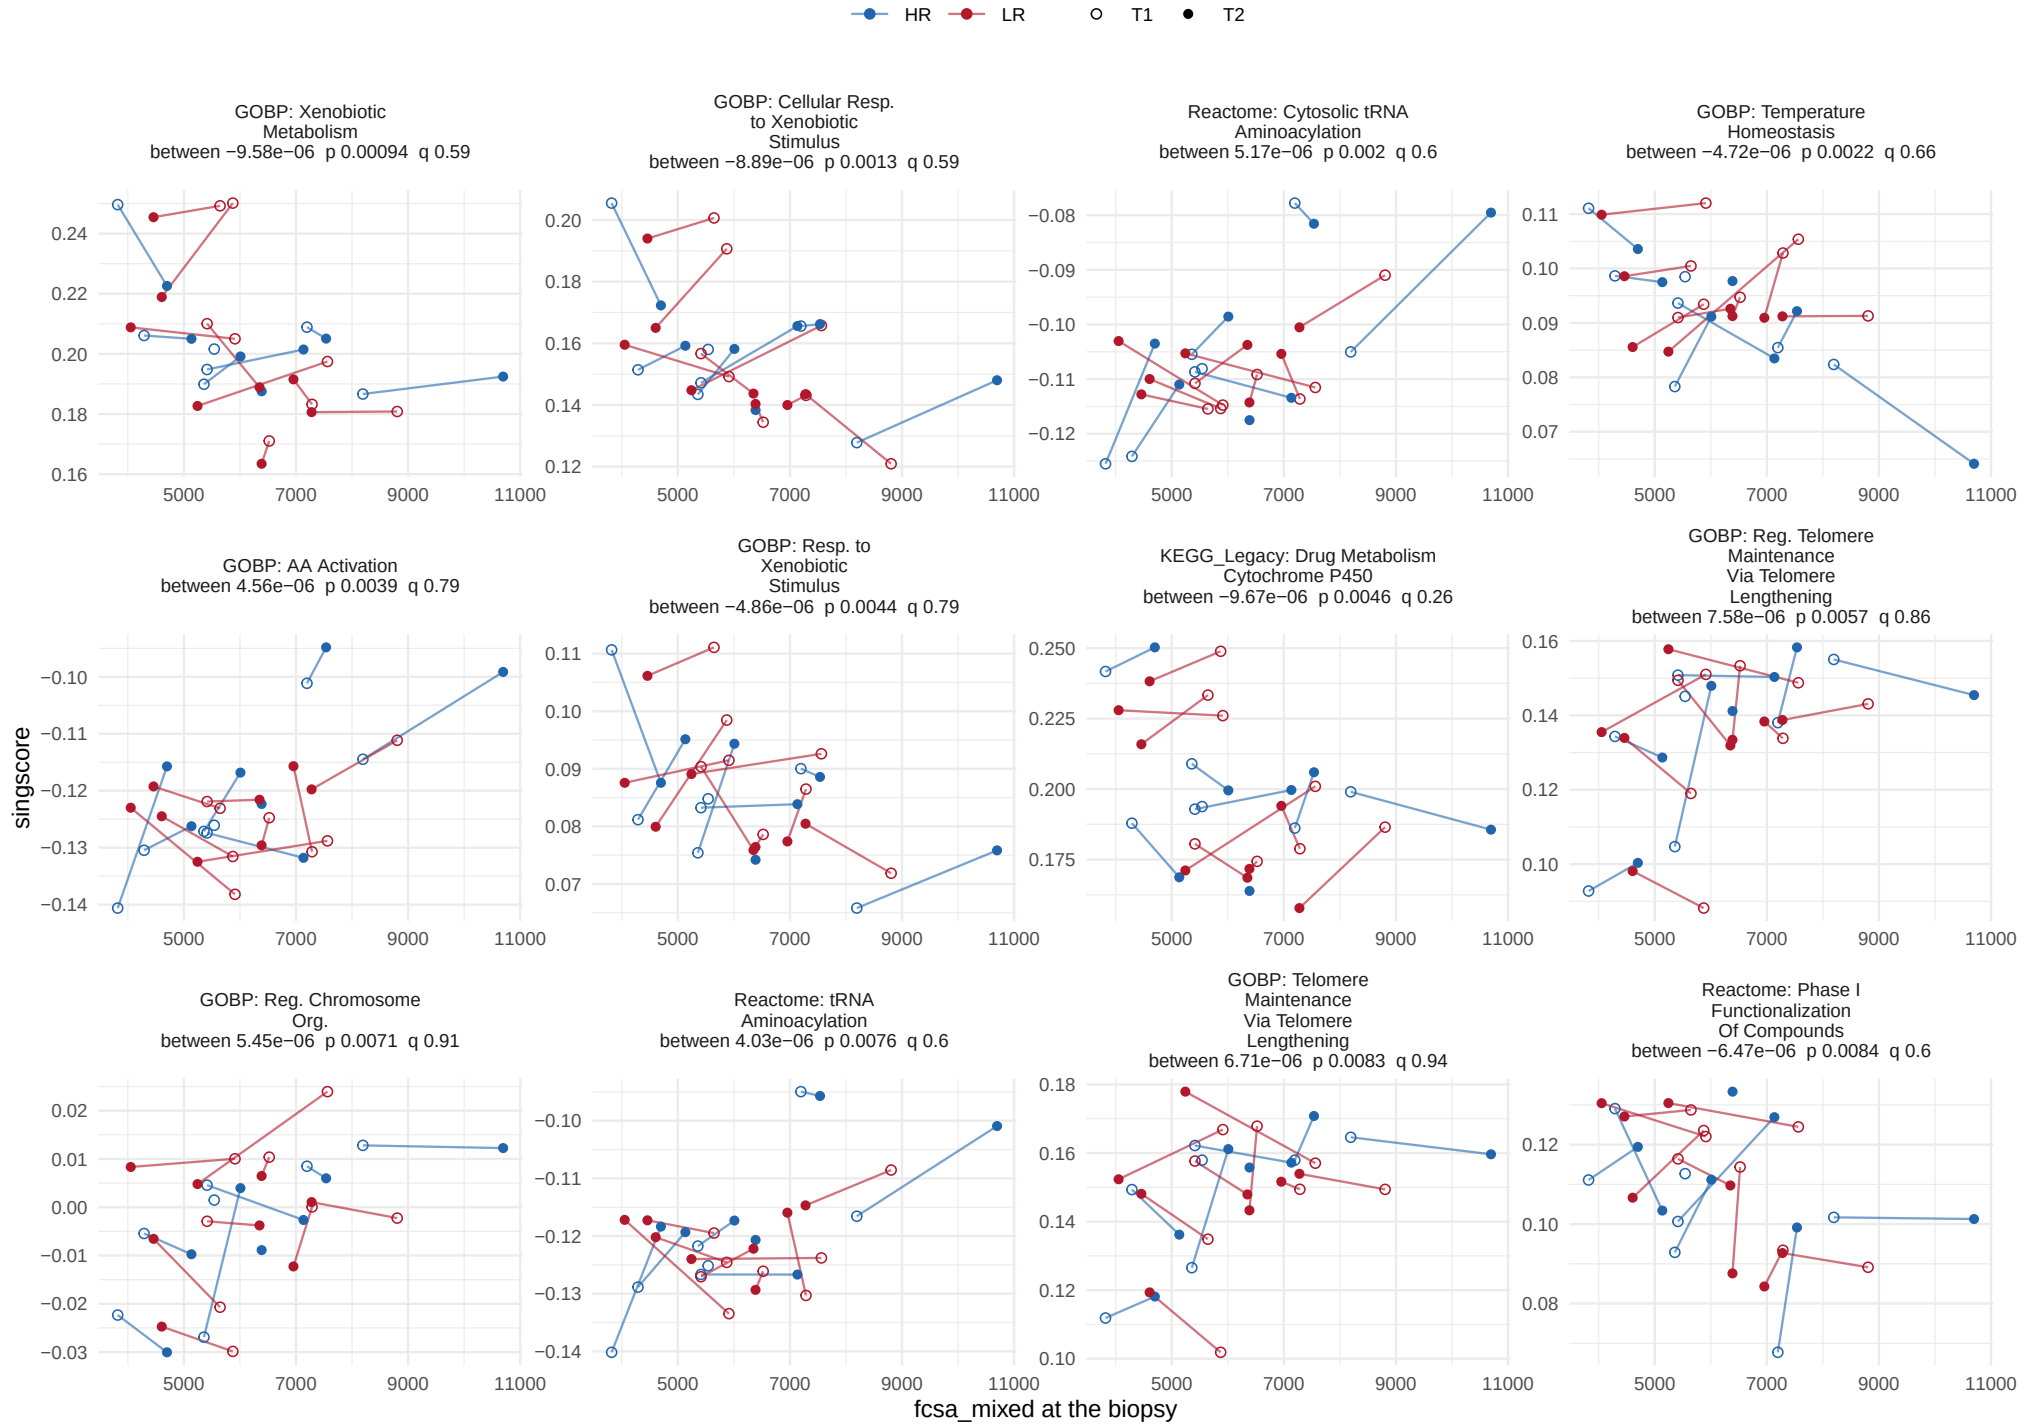

limma on 30 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

fcsa_mixed, between−person term


63 of 1378 sets at p < 0.05, 0 at BH < 0.05.

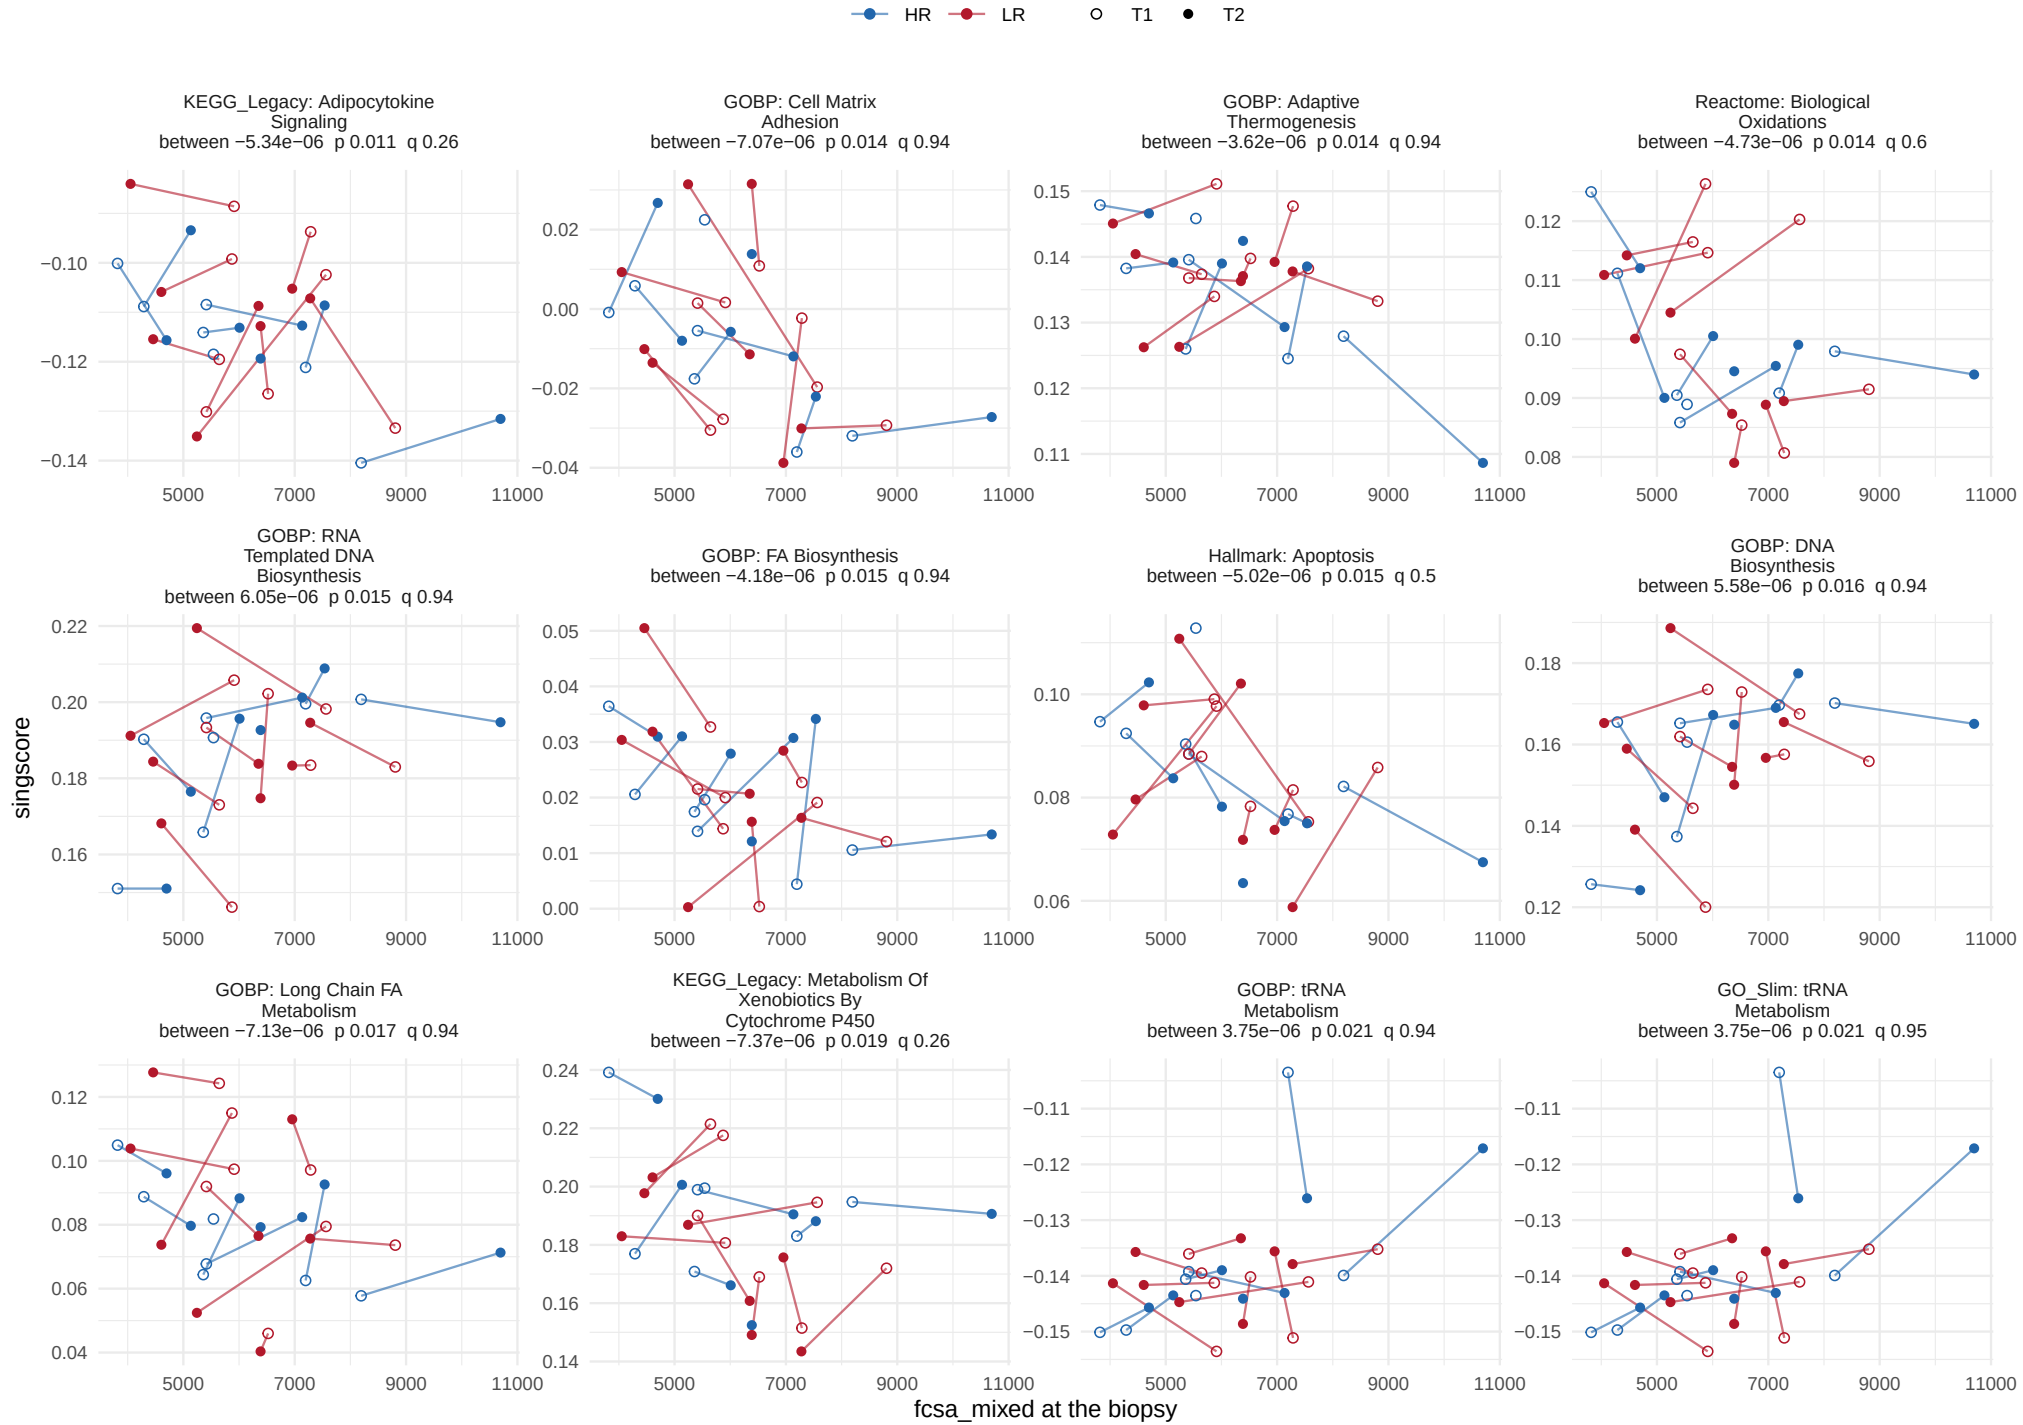

limma on 30 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

fcsa_mixed, between−person term


63 of 1378 sets at p < 0.05, 0 at BH < 0.05.

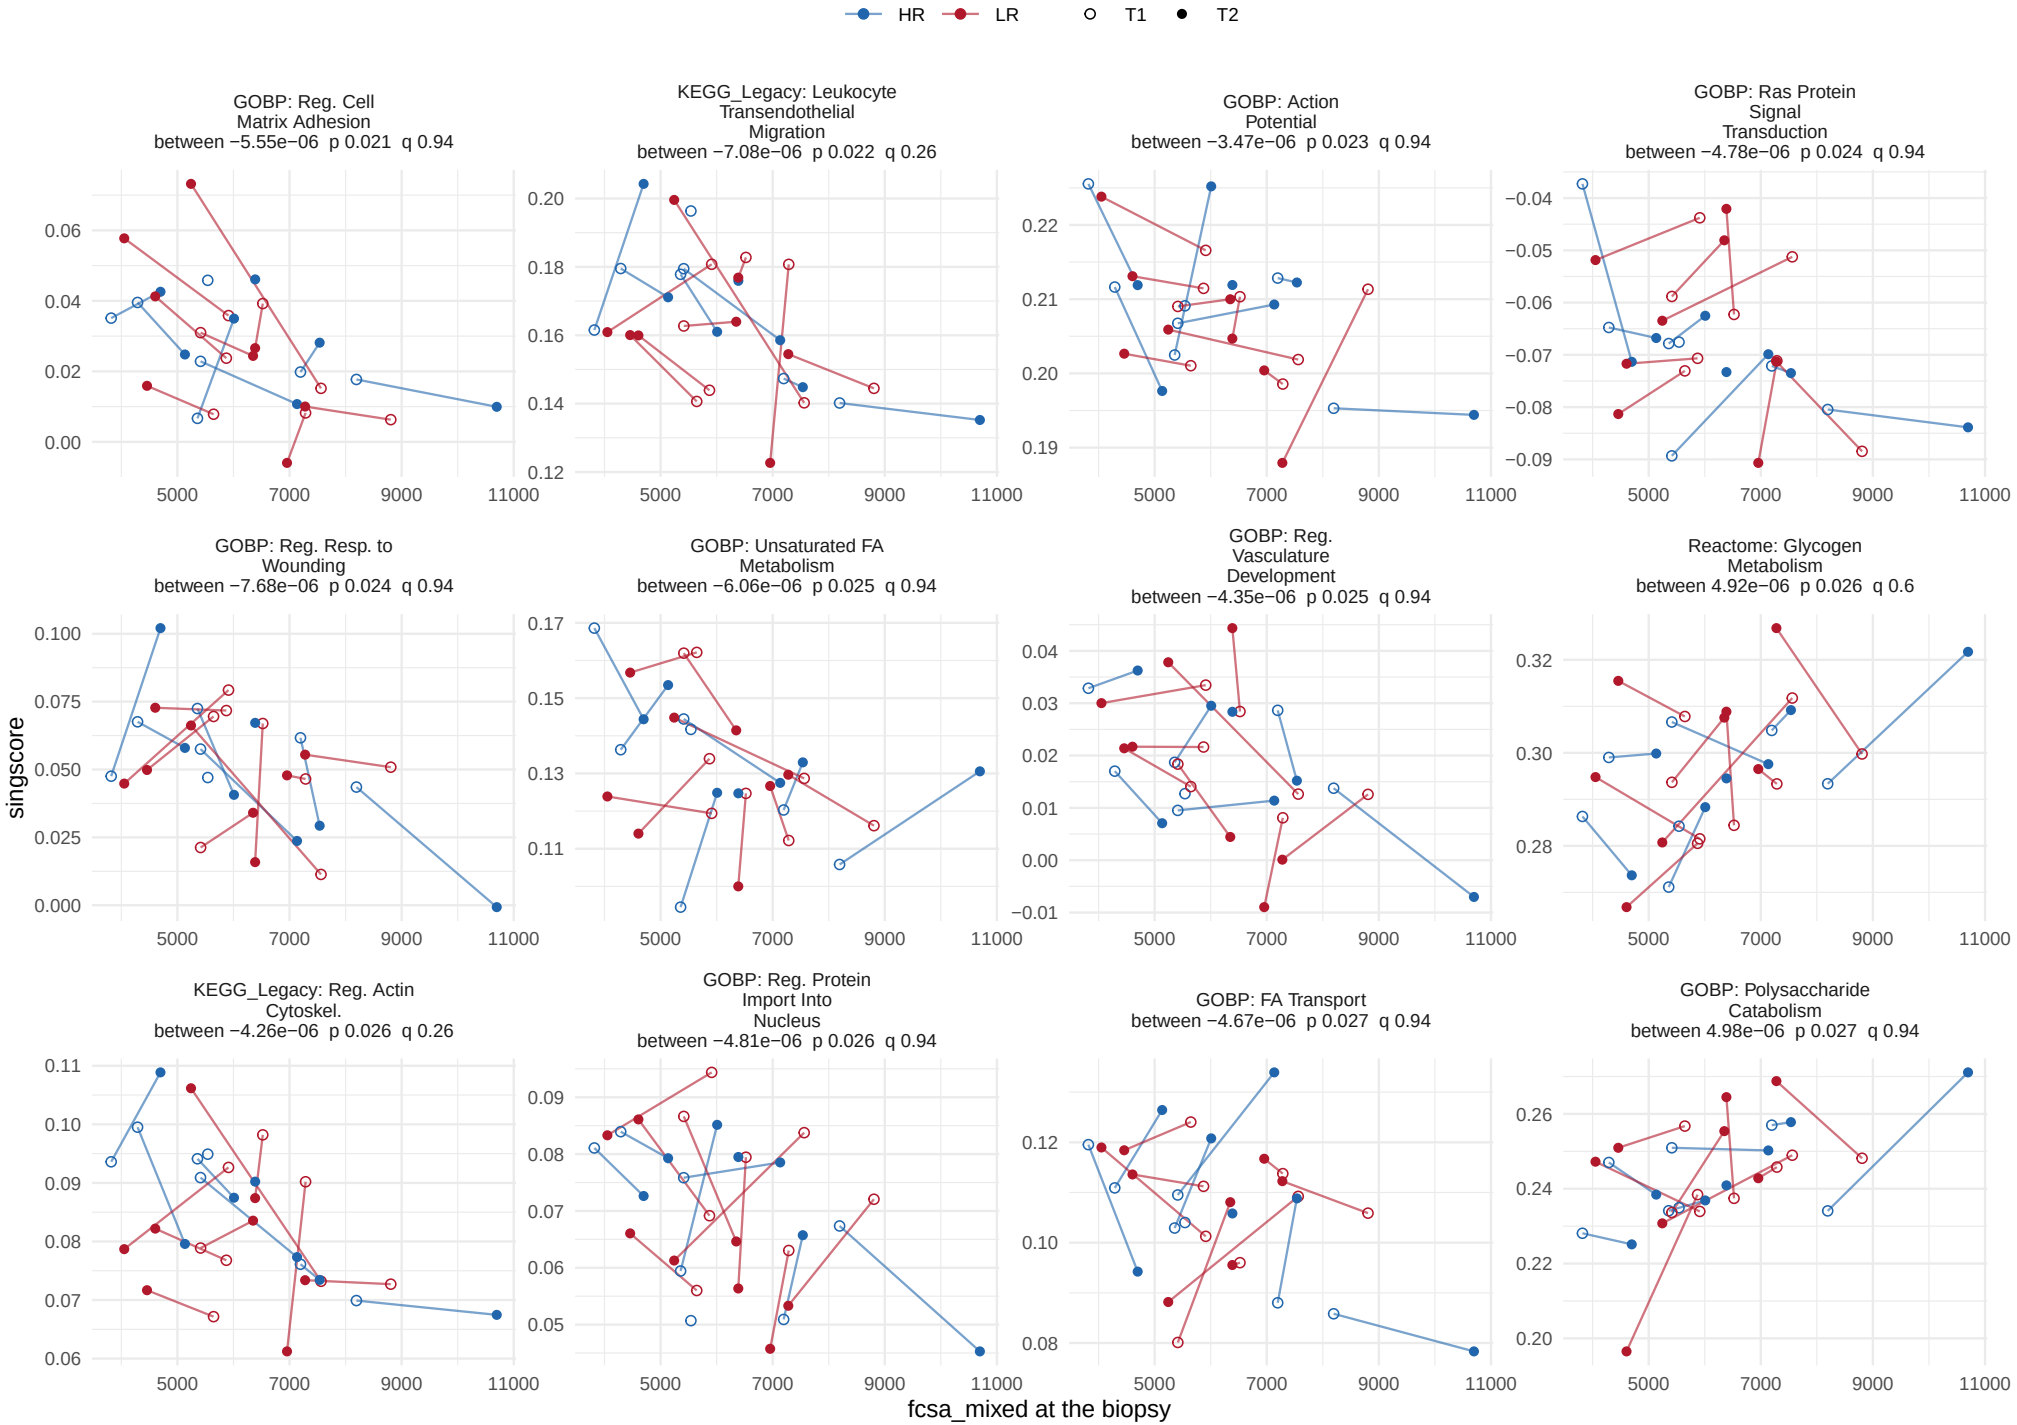

limma on 30 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

fcsa_mixed, between−person term


63 of 1378 sets at p < 0.05, 0 at BH < 0.05.

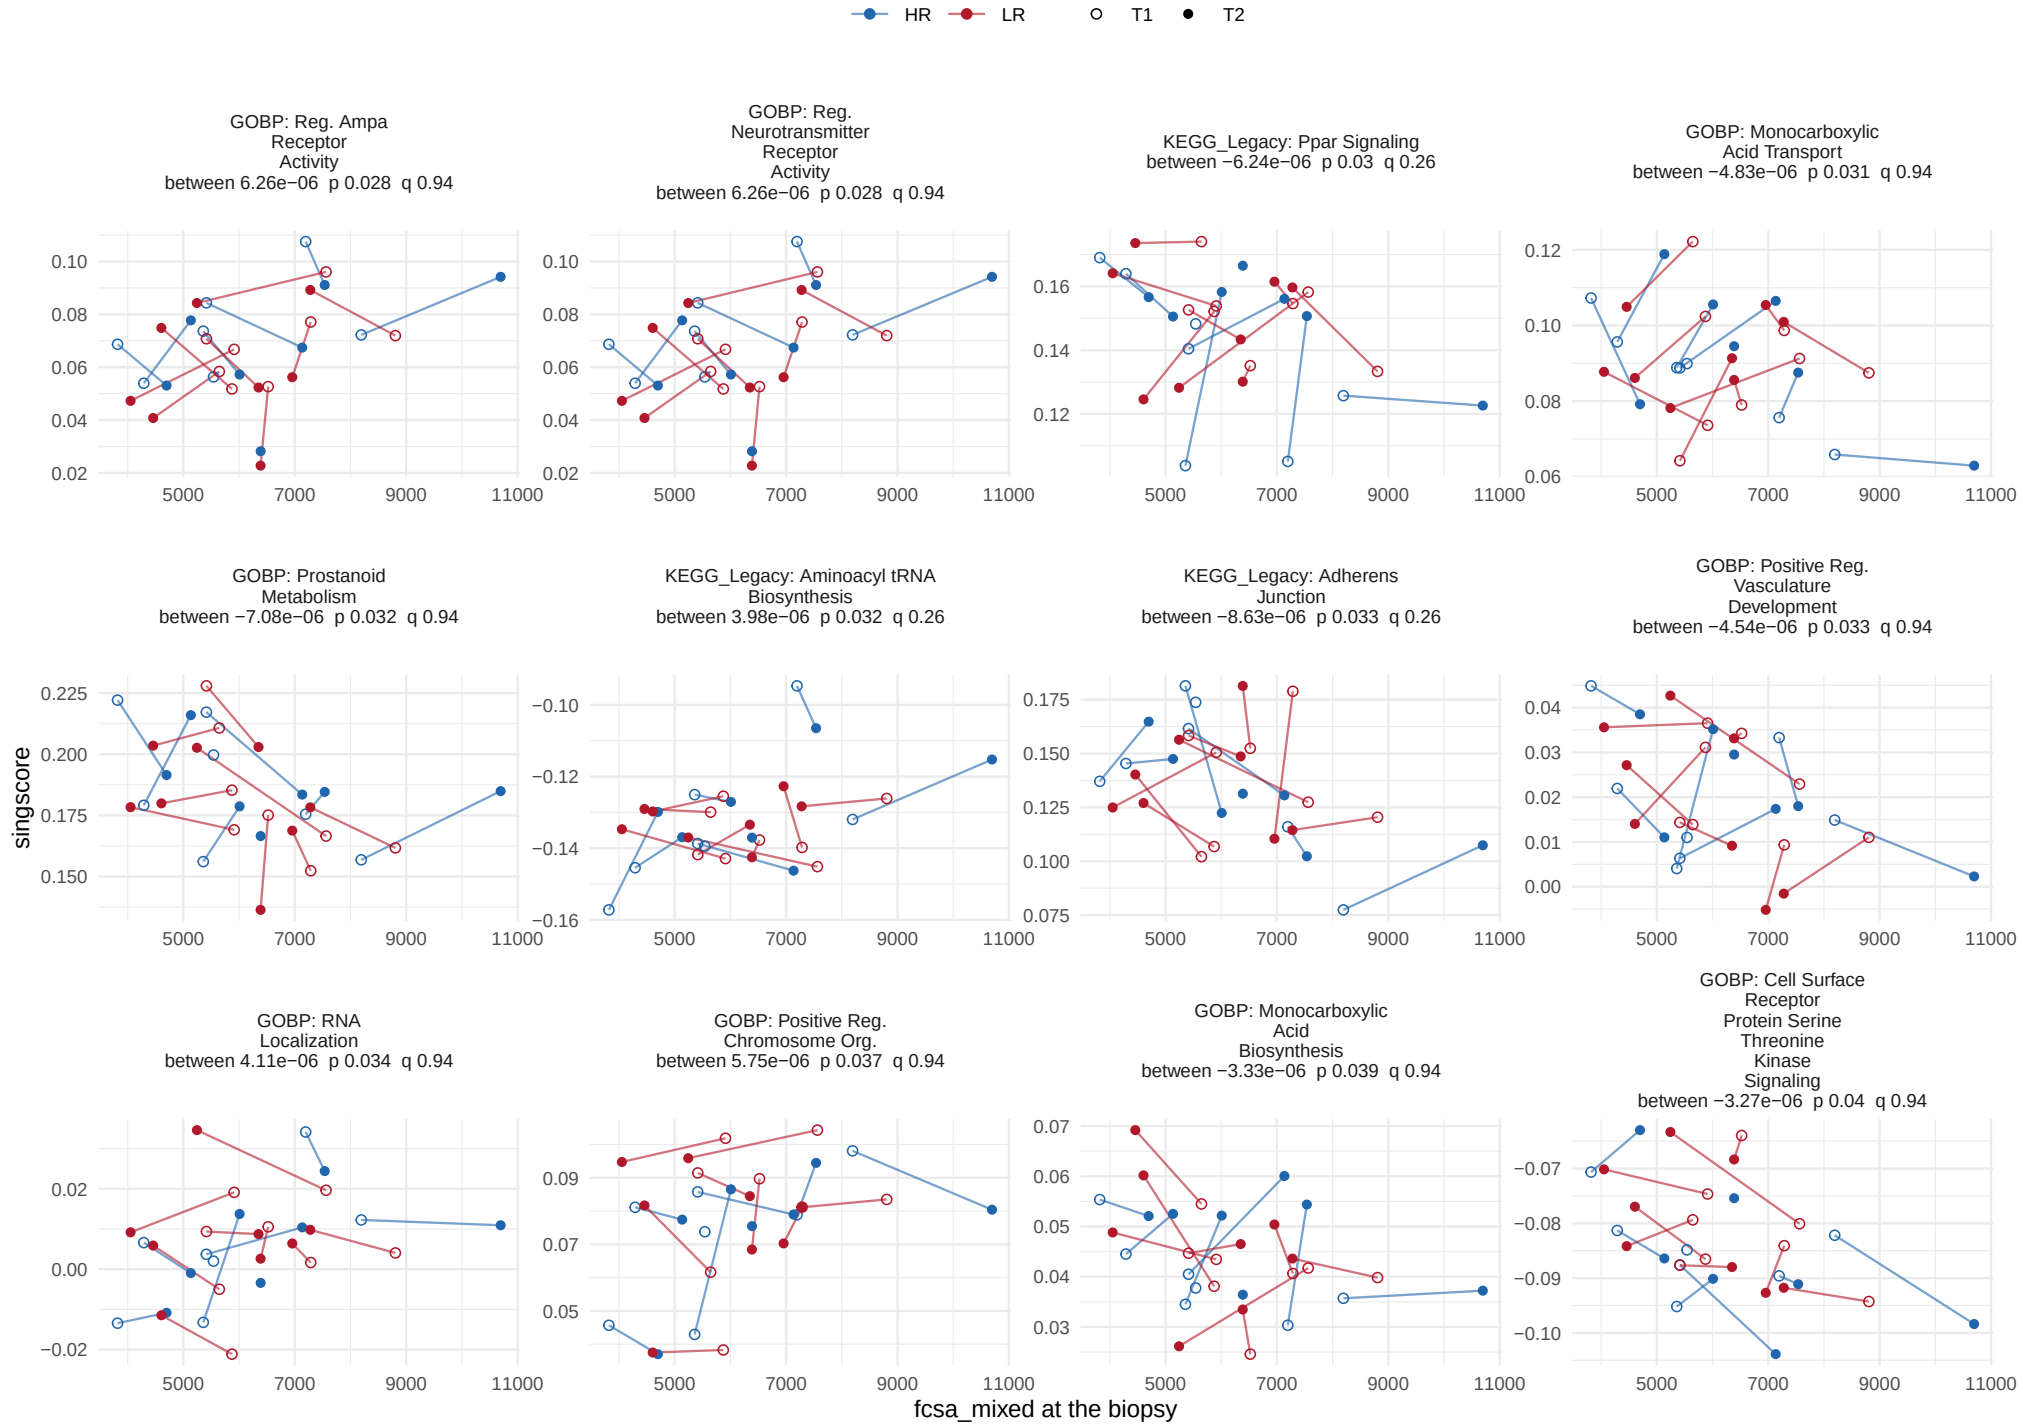

limma on 30 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

fcsa_mixed, between−person term


63 of 1378 sets at p < 0.05, 0 at BH < 0.05.

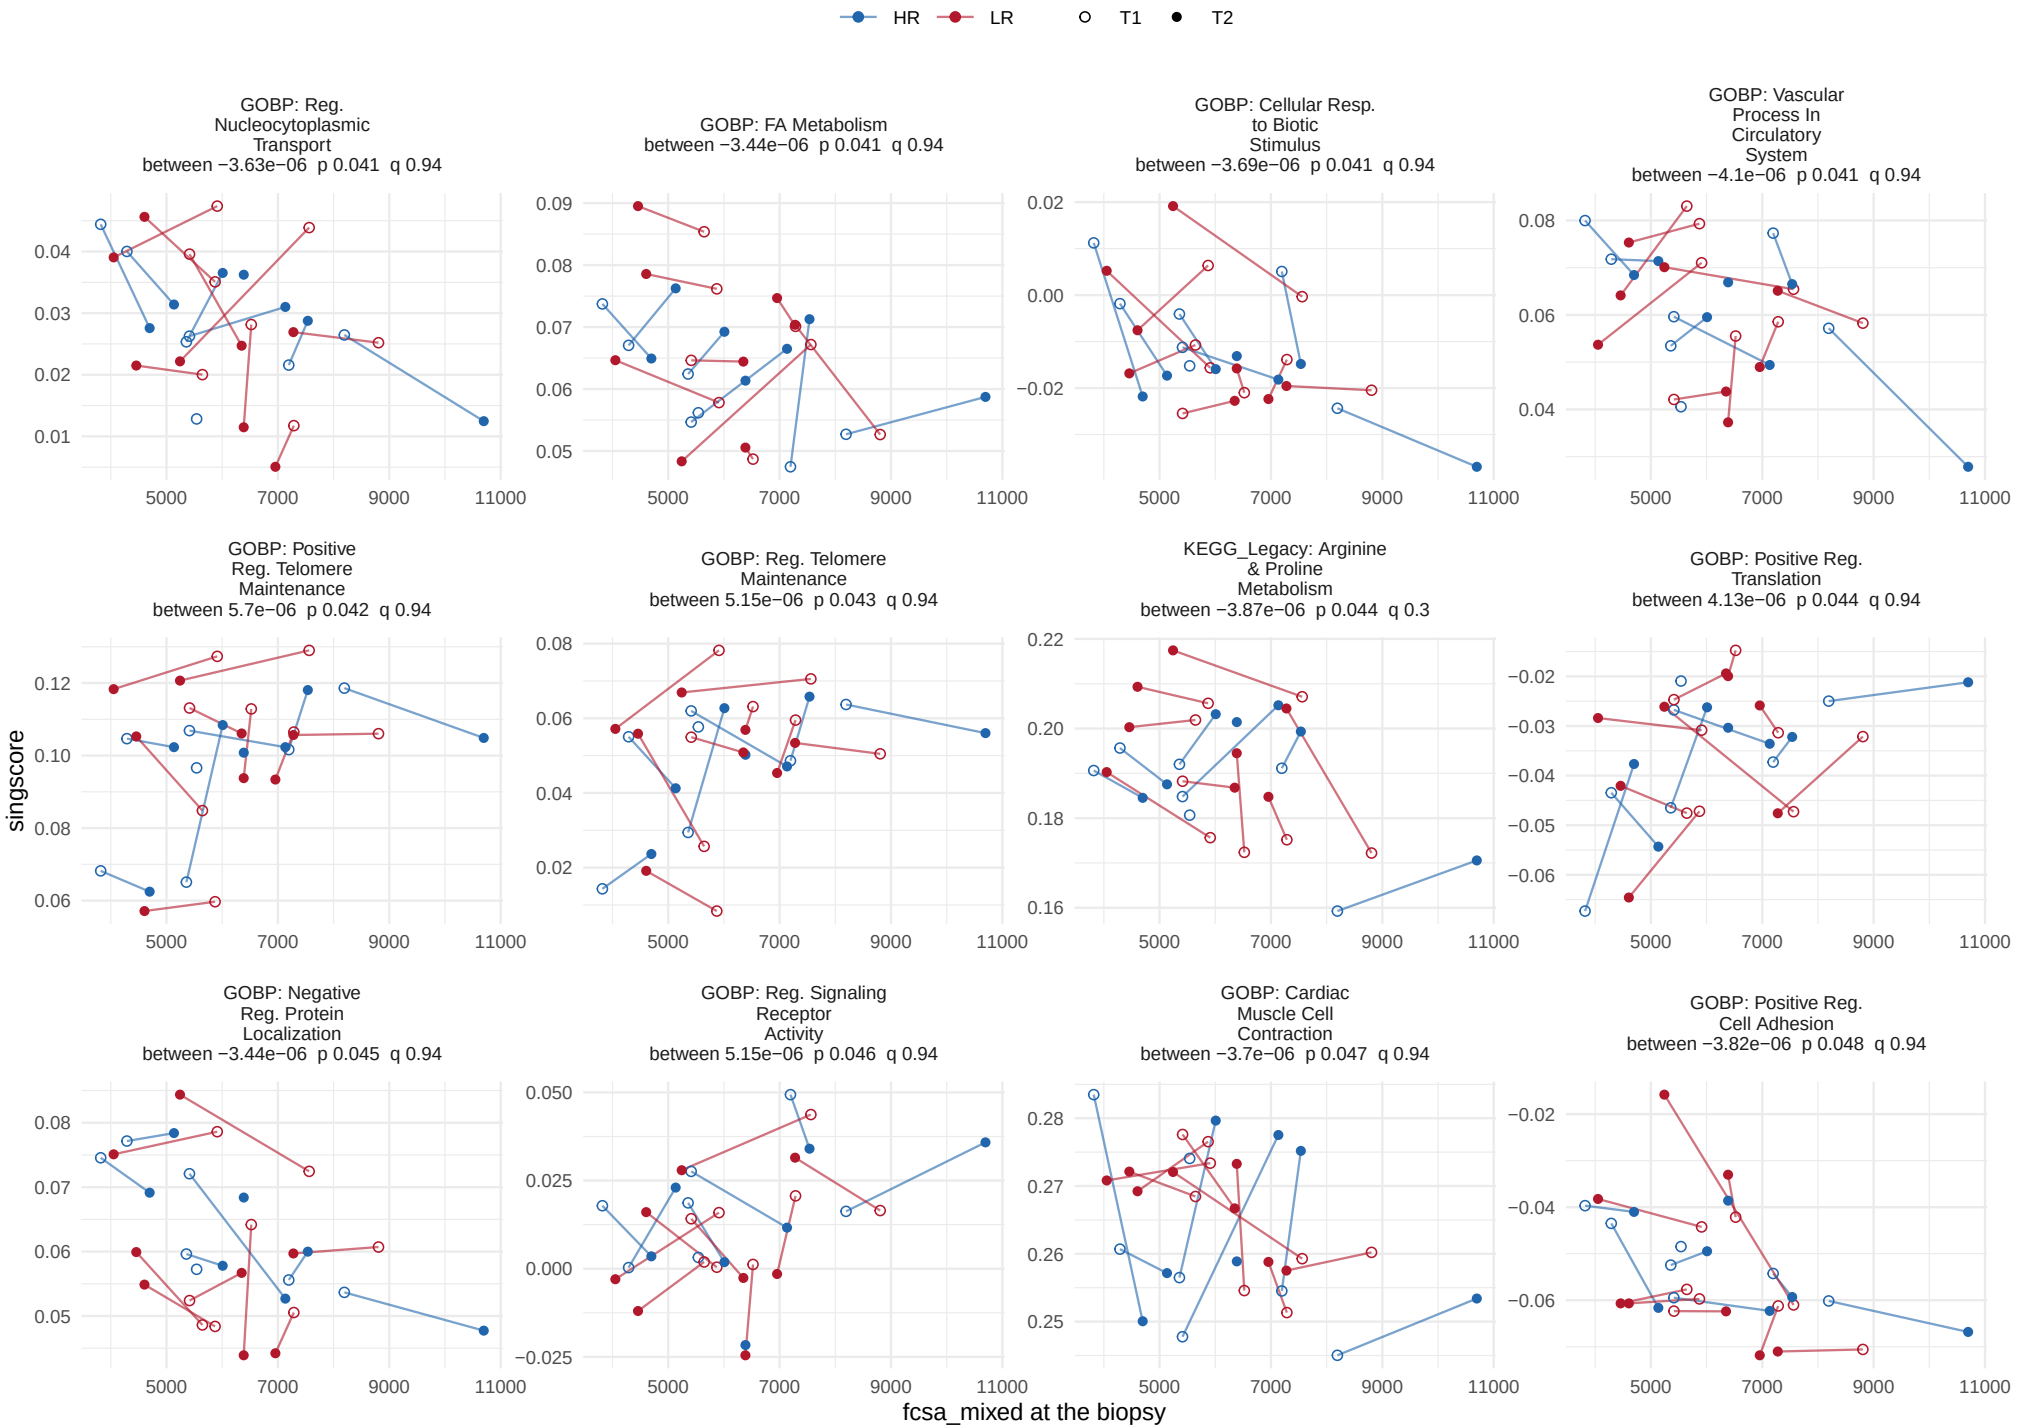

limma on 30 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

fcsa_mixed, between−person term


63 of 1378 sets at p < 0.05, 0 at BH < 0.05.

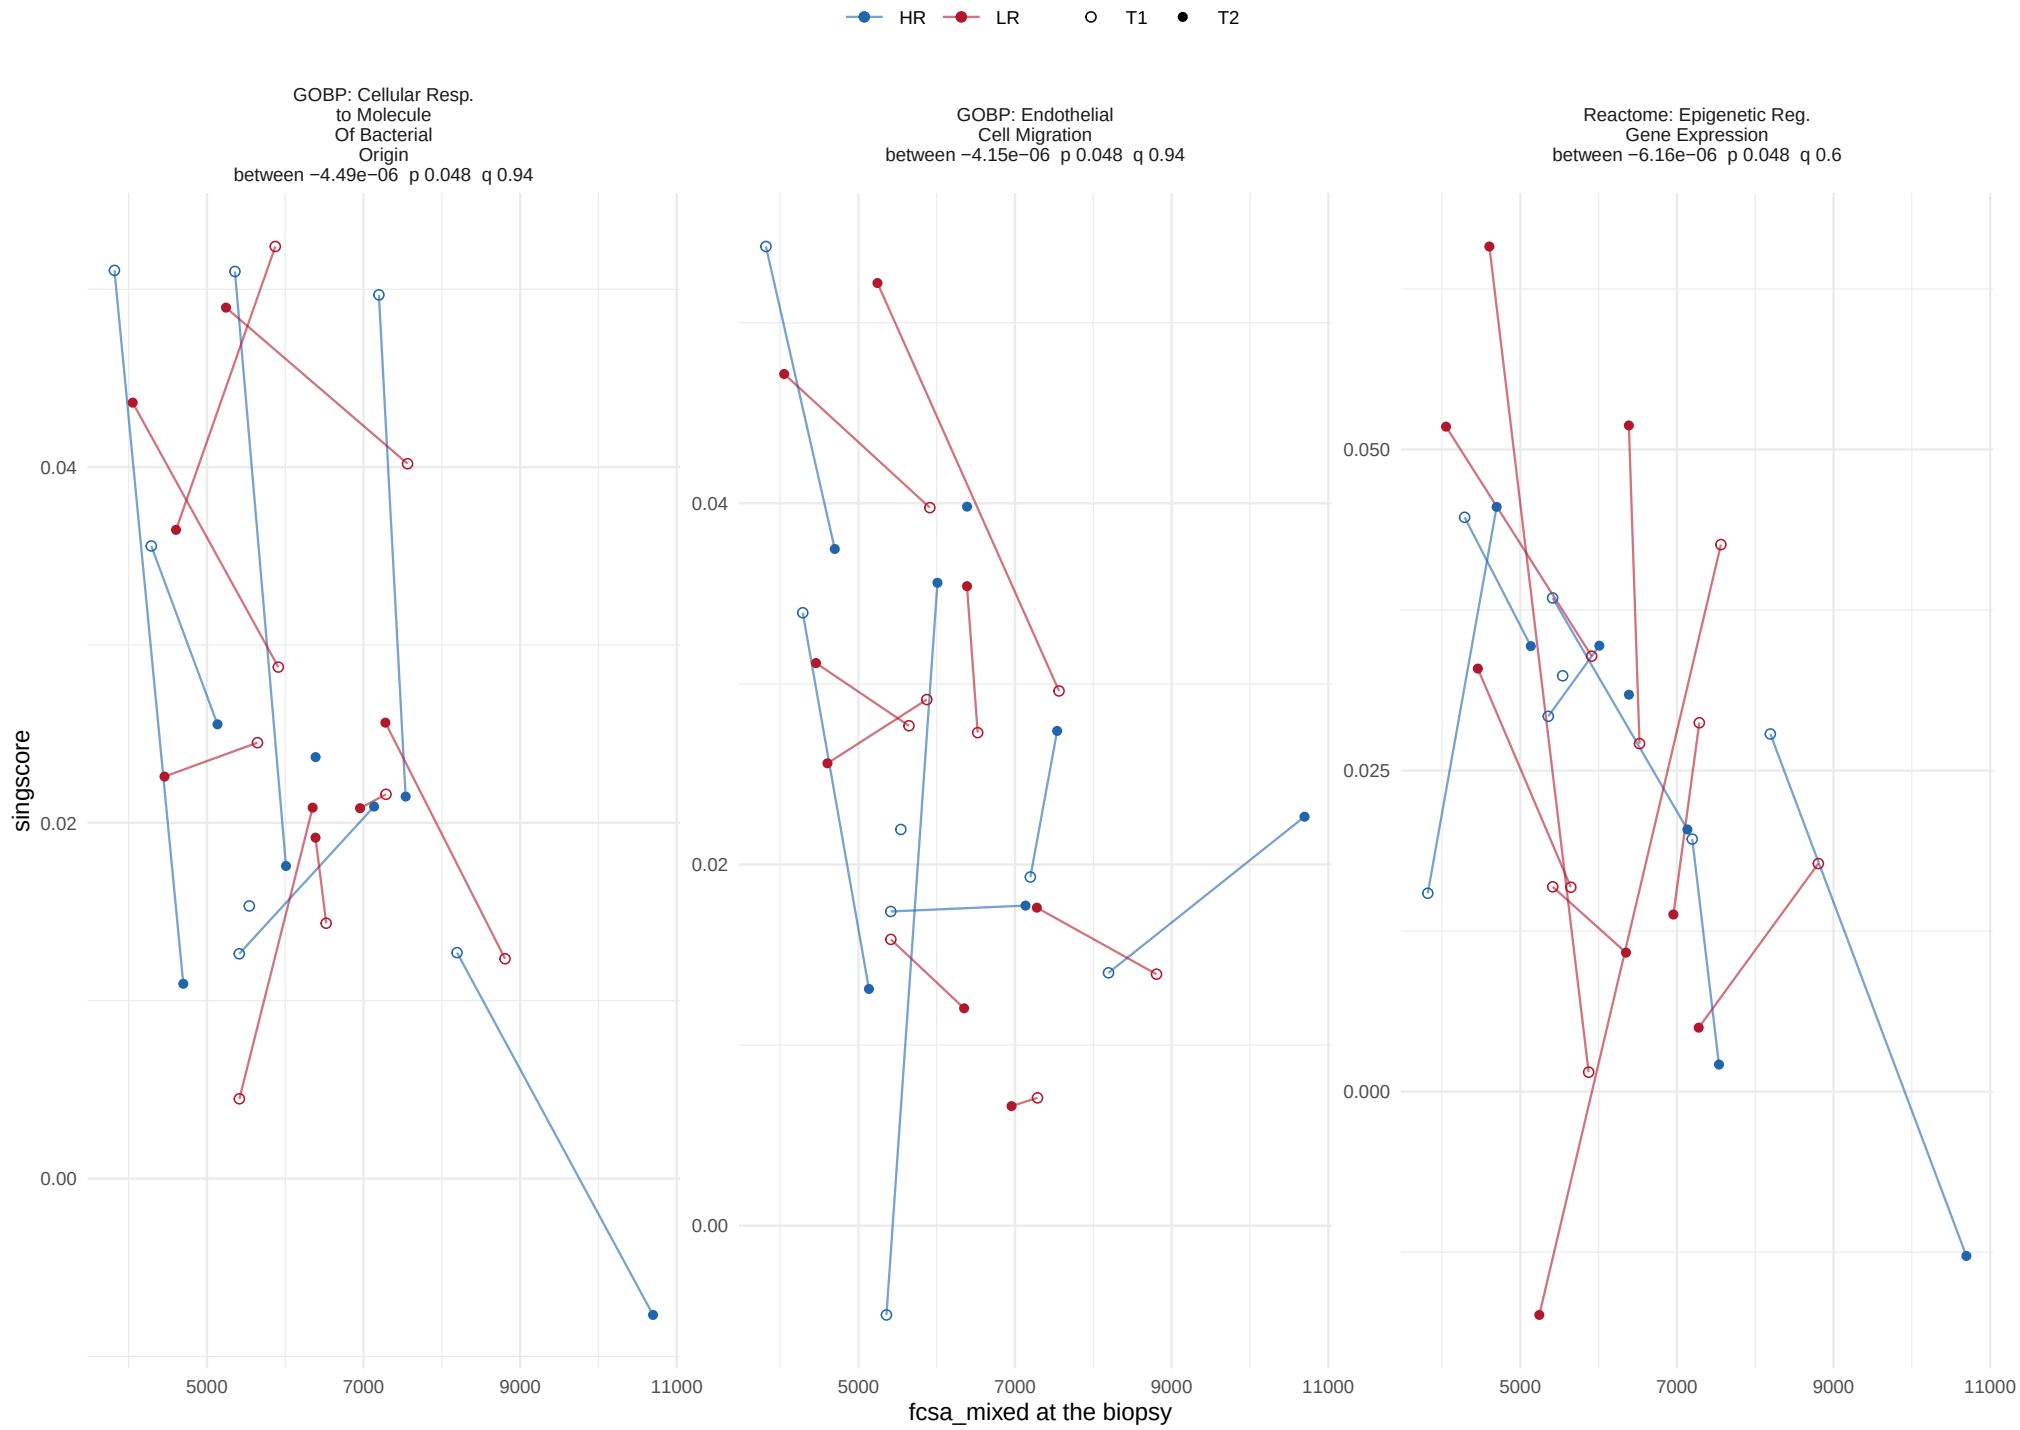

limma on 30 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

fcsa_mixed, within−person term


50 of 1378 sets at p < 0.05, 0 at BH < 0.05.

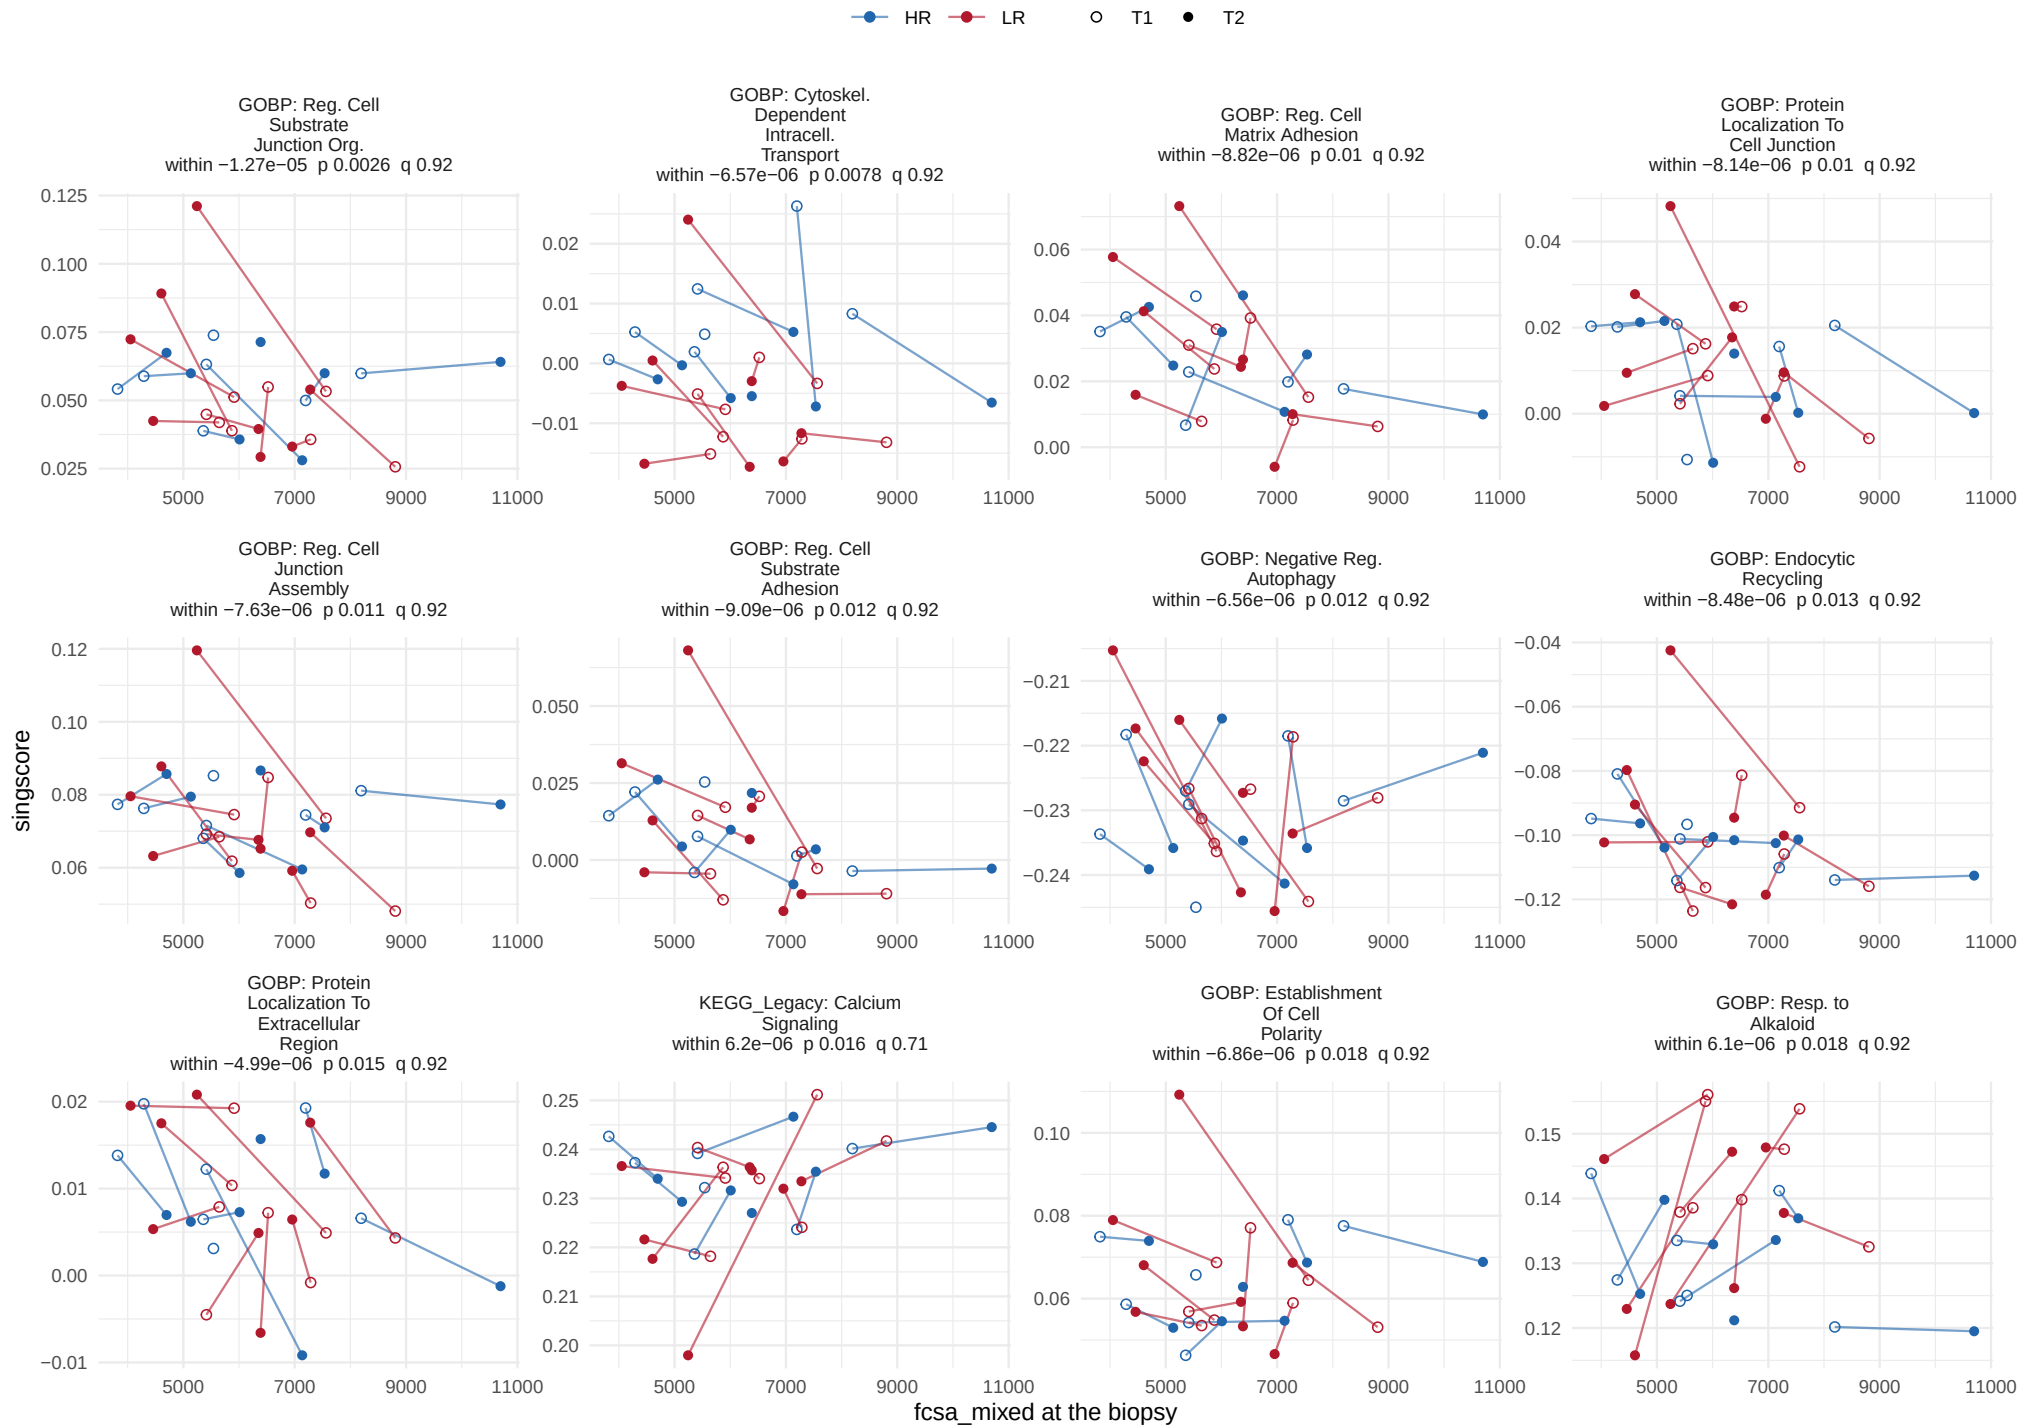

limma on 30 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

fcsa_mixed, within−person term


50 of 1378 sets at p < 0.05, 0 at BH < 0.05.

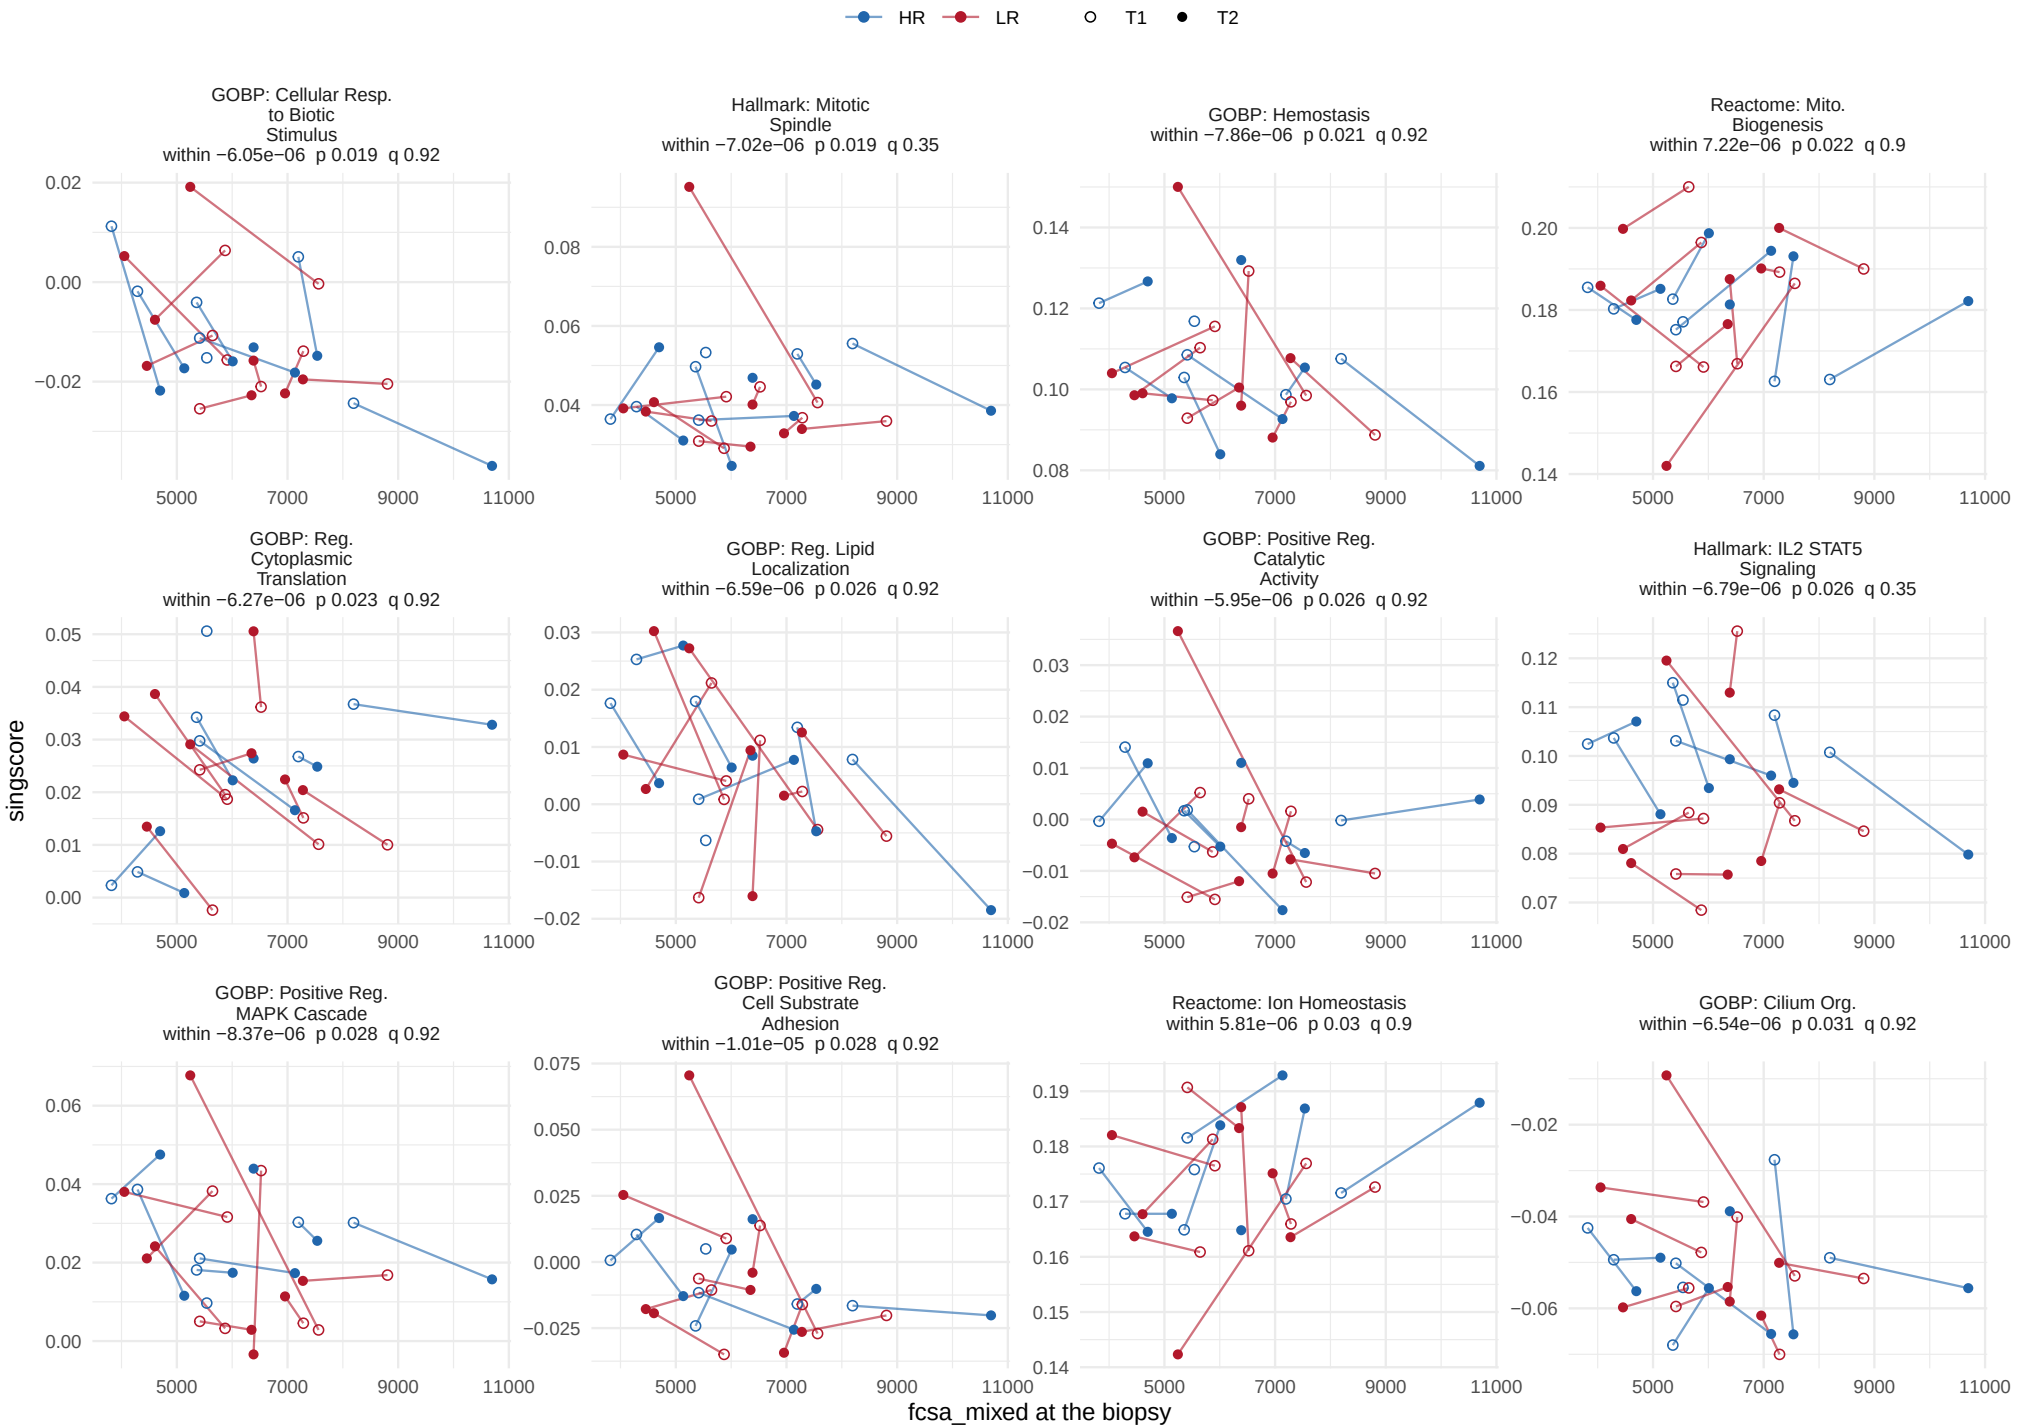

limma on 30 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

fcsa_mixed, within−person term


50 of 1378 sets at p < 0.05, 0 at BH < 0.05.

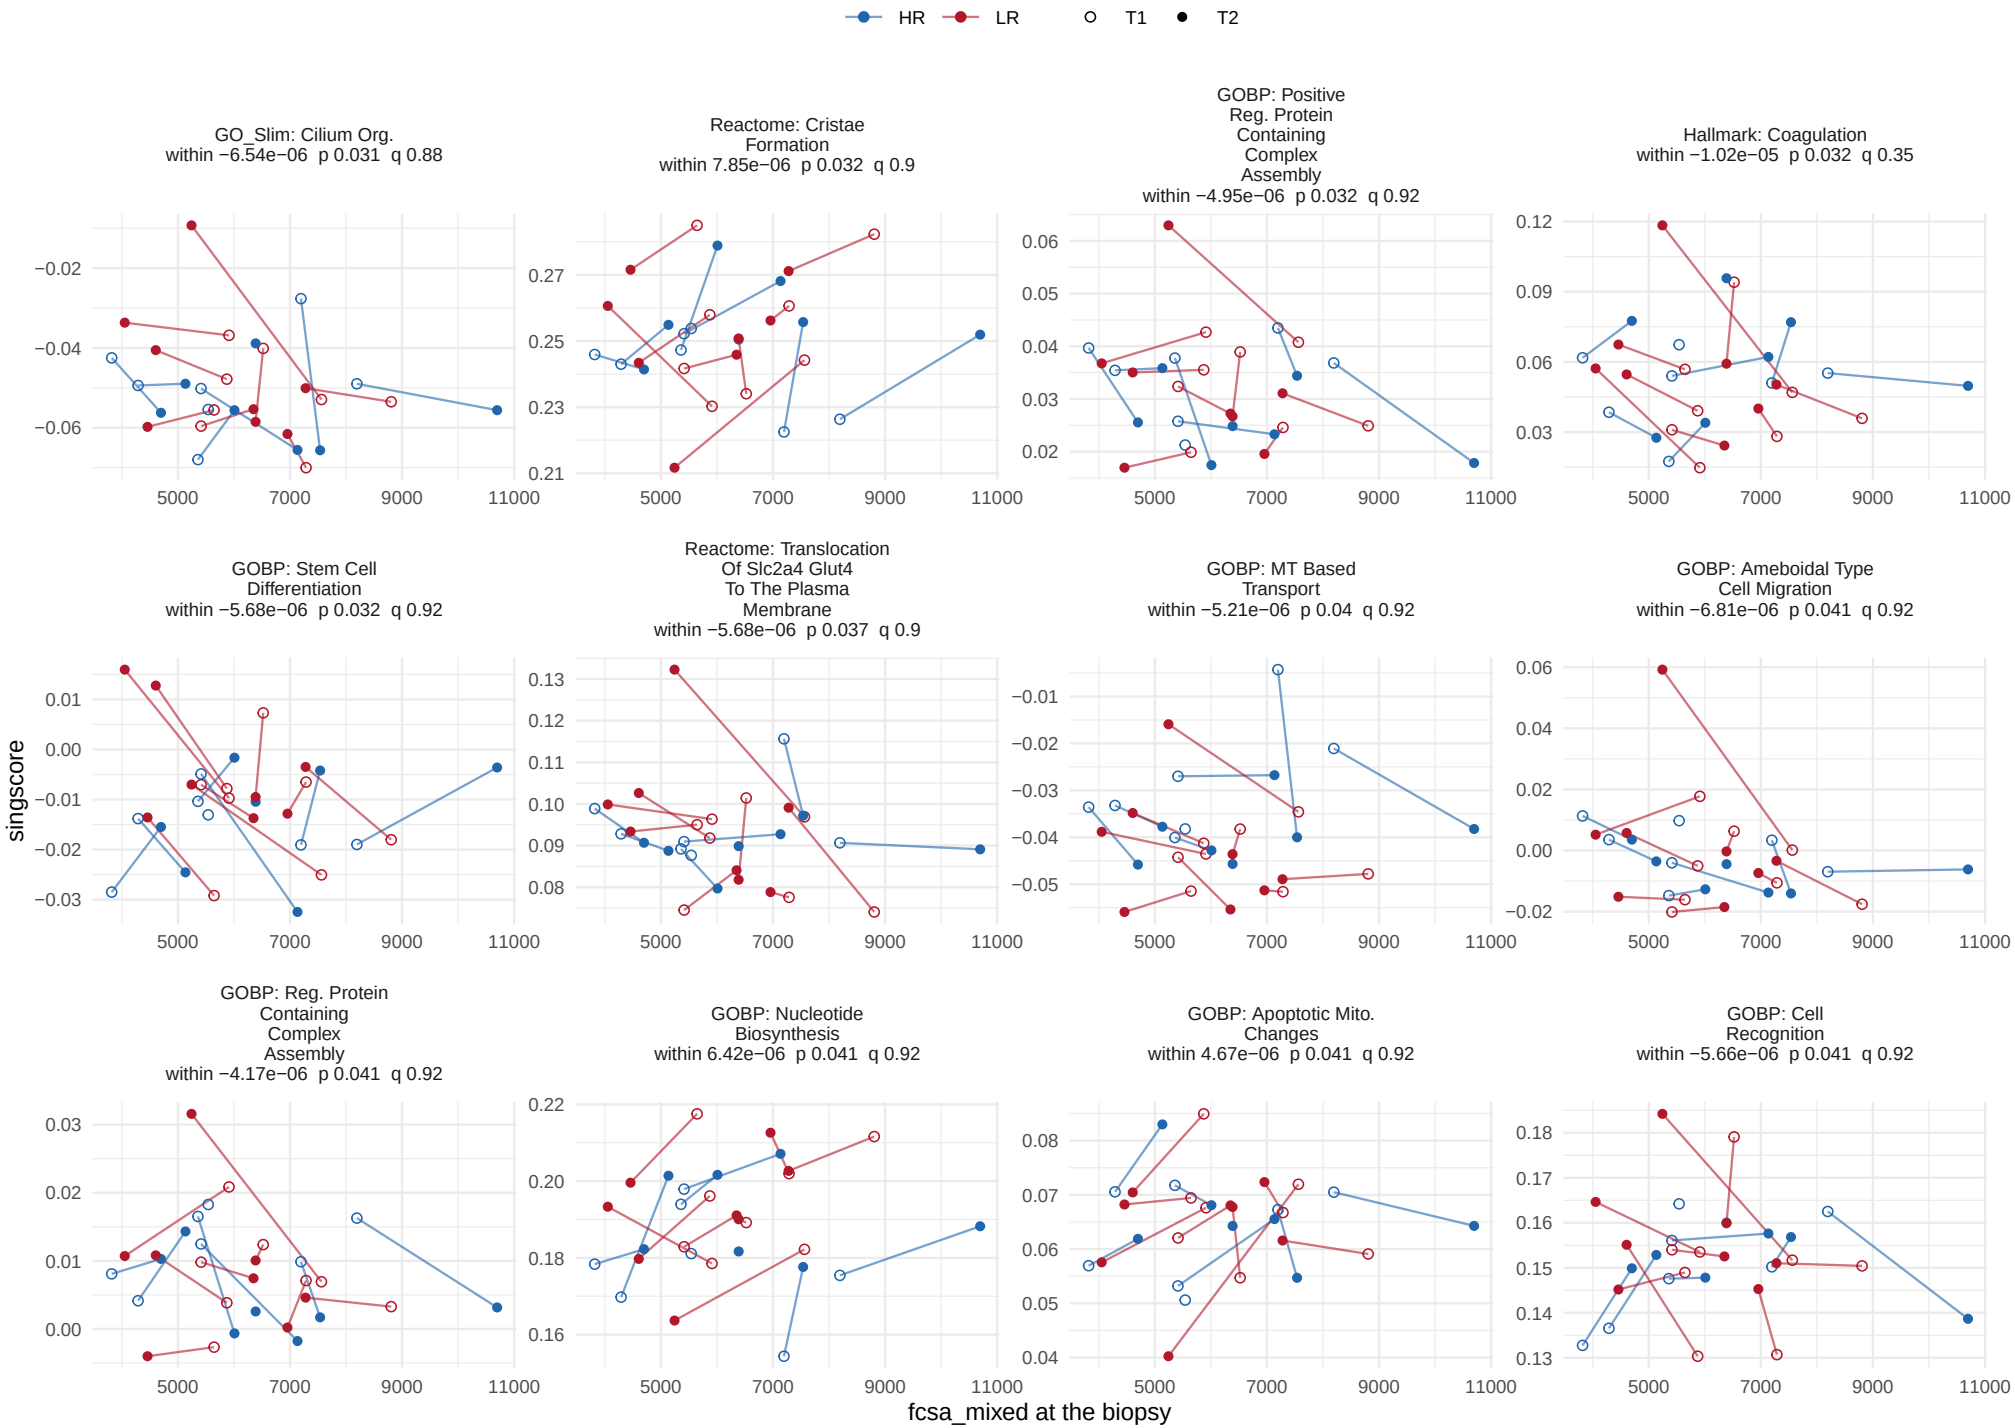

limma on 30 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

fcsa_mixed, within−person term


50 of 1378 sets at p < 0.05, 0 at BH < 0.05.

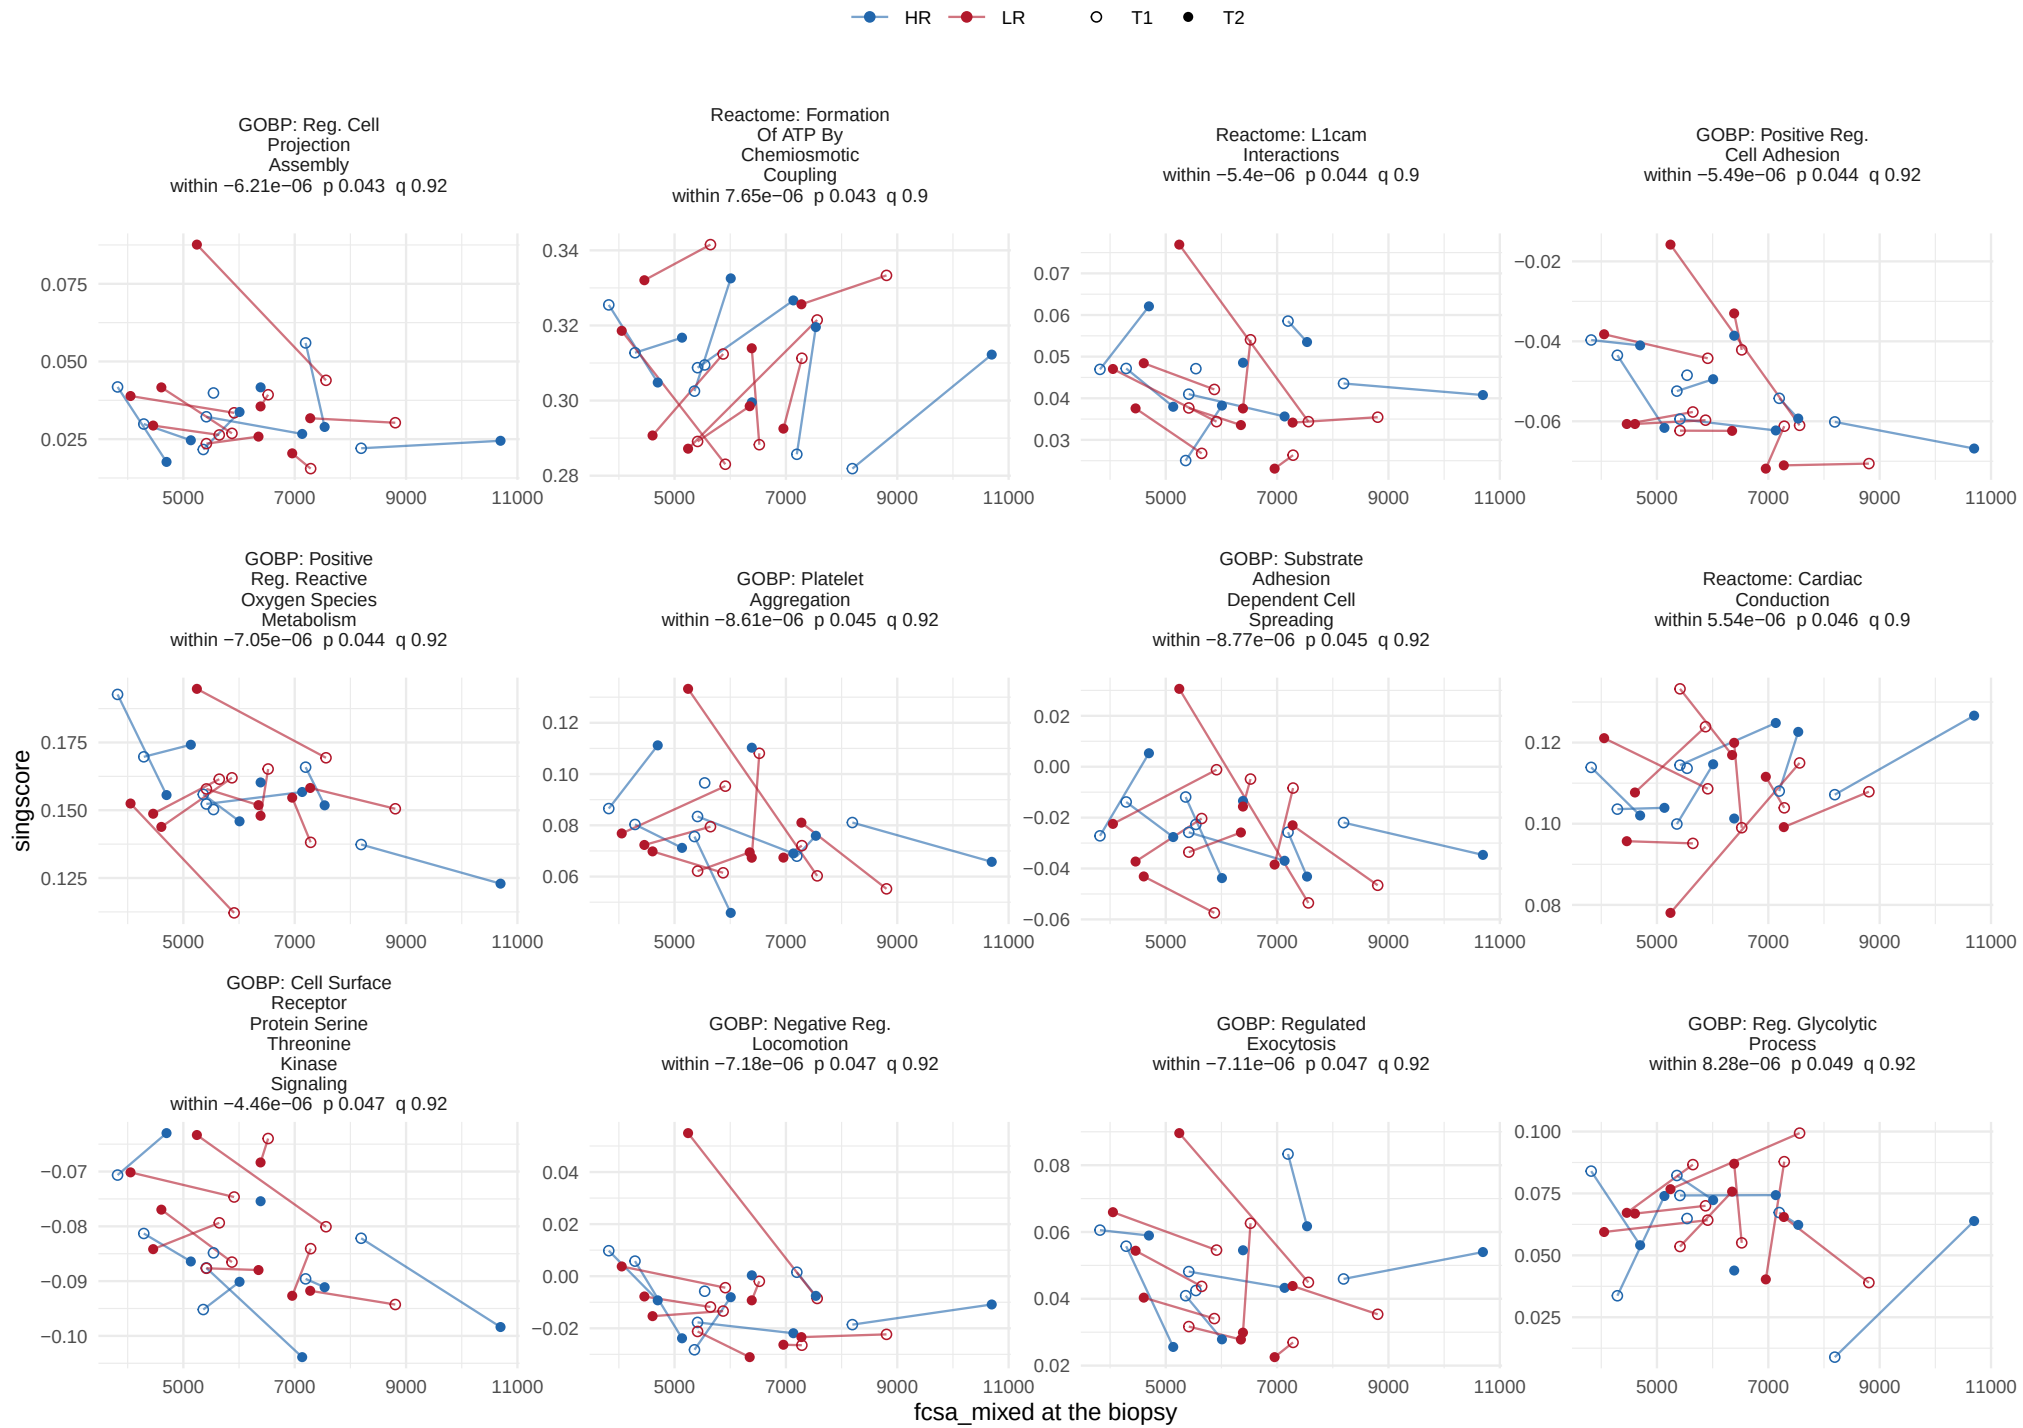

limma on 30 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

fcsa_mixed, within−person term


50 of 1378 sets at p < 0.05, 0 at BH < 0.05.

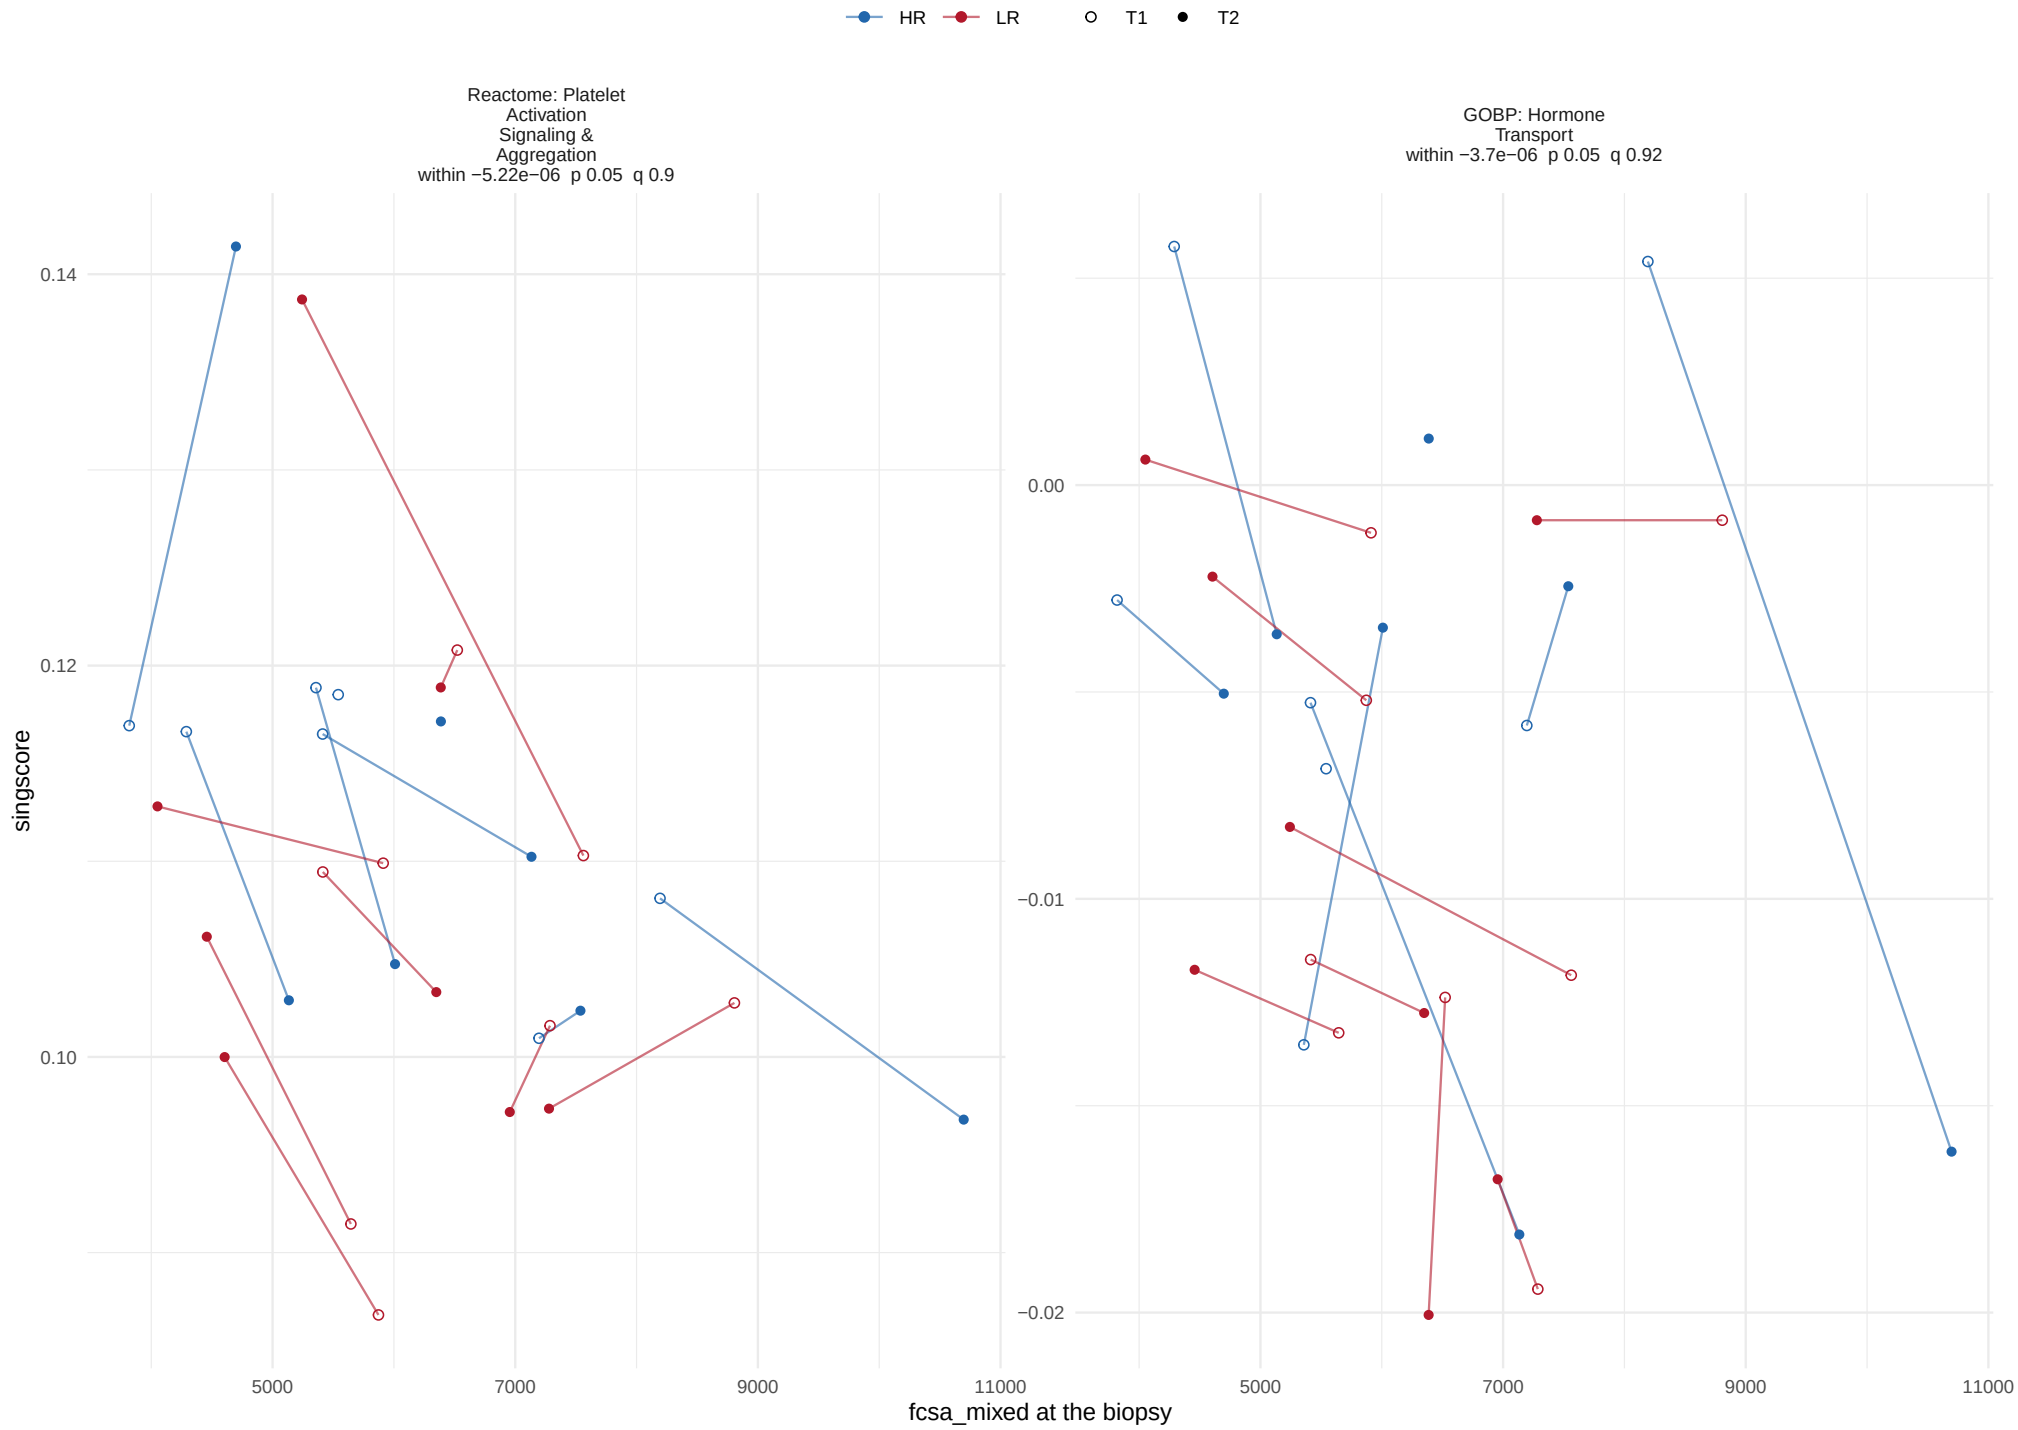

limma on 30 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

fcsa_type1, between−person term


114 of 1378 sets at p < 0.05, 0 at BH < 0.05.

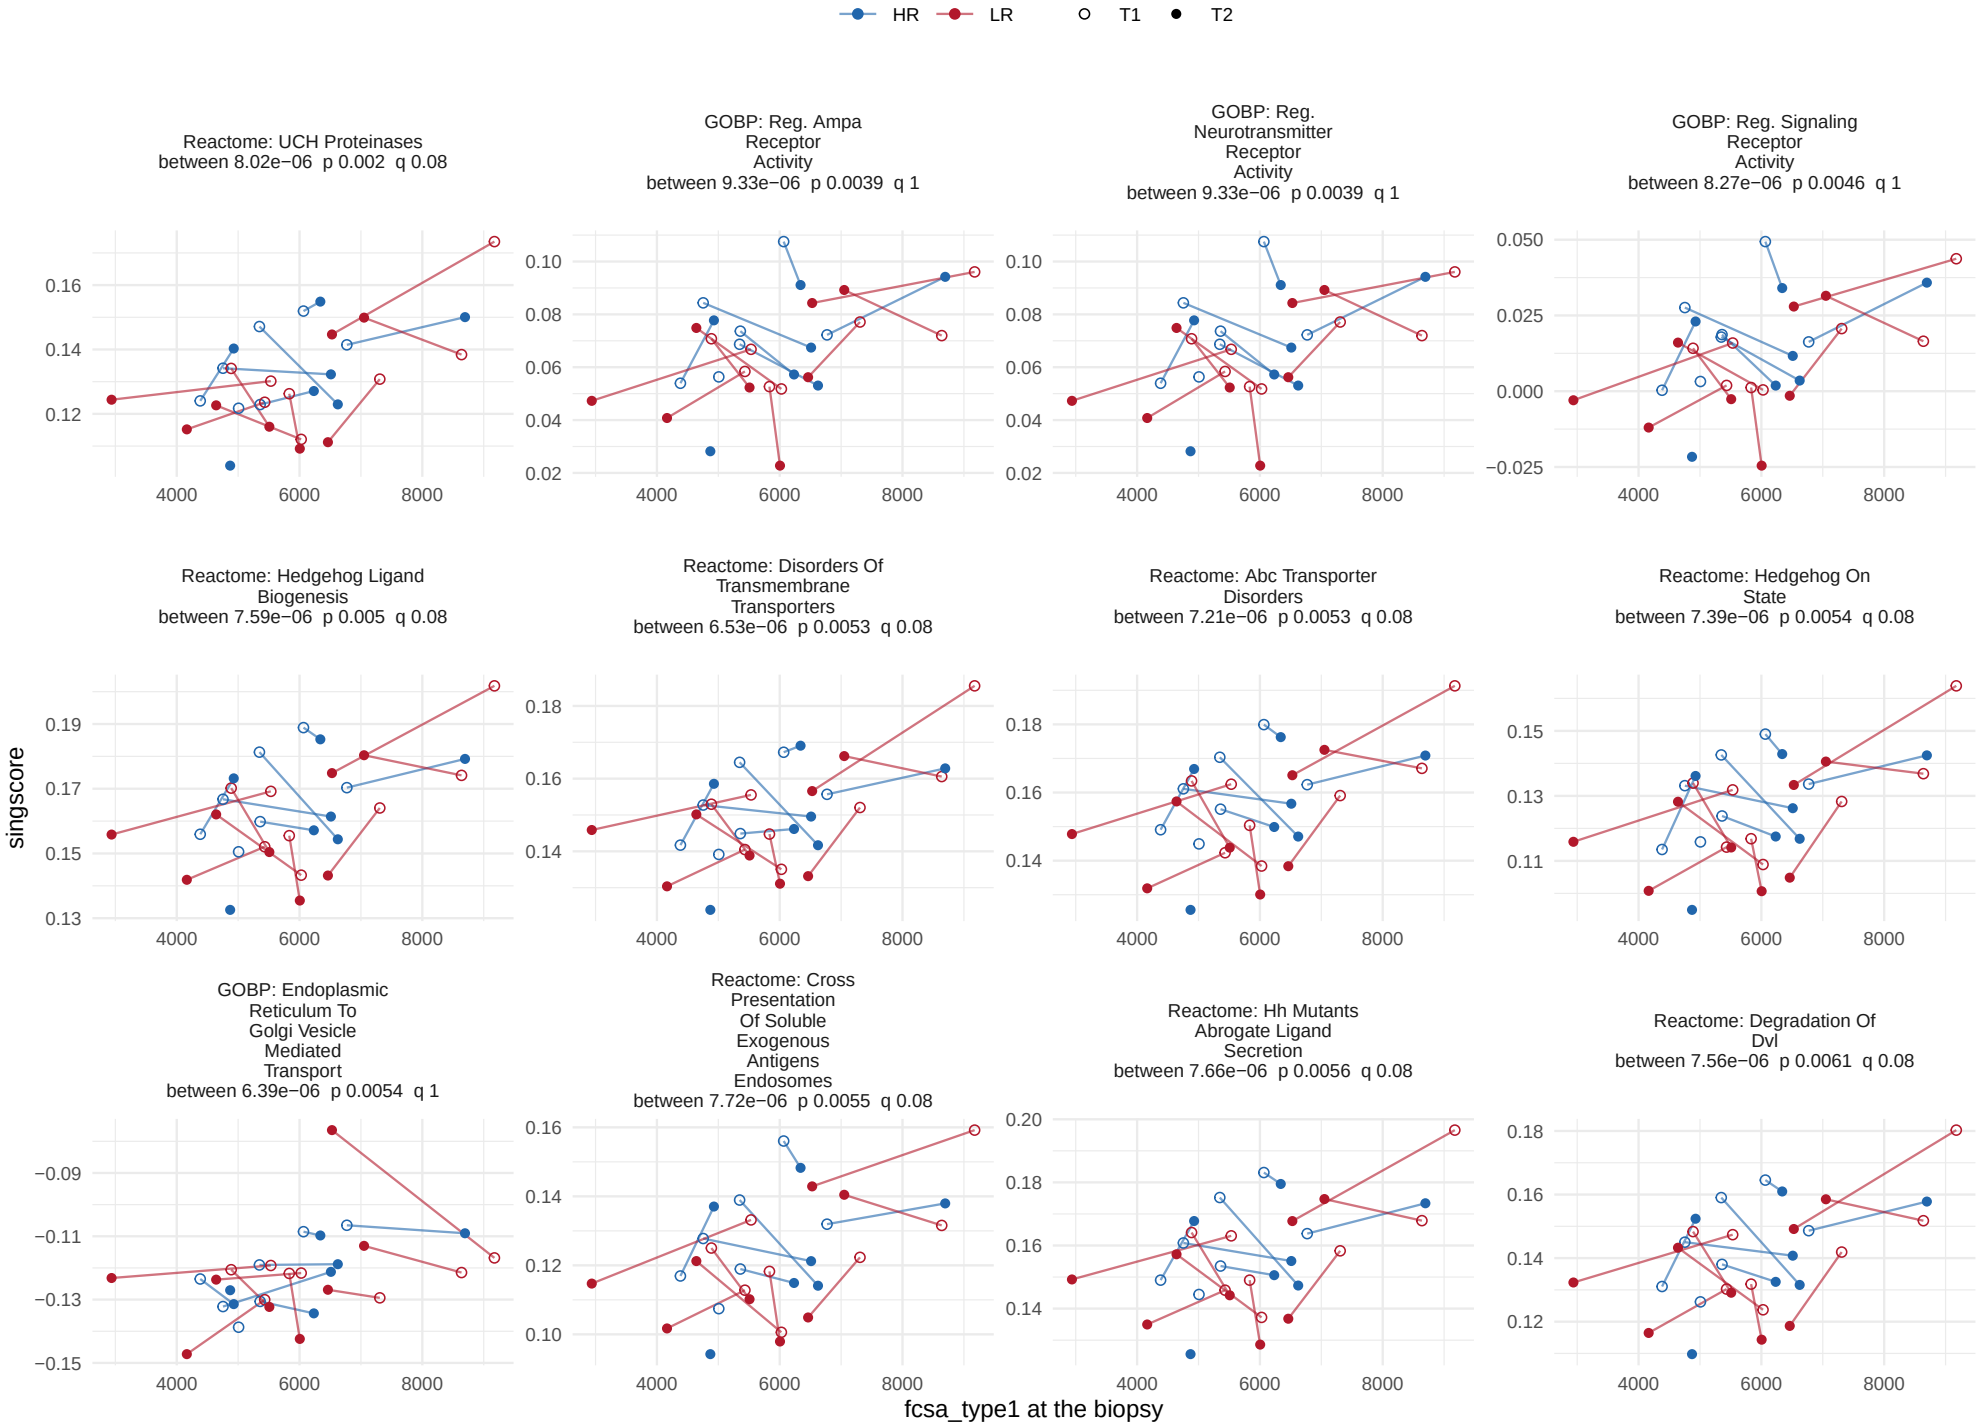

limma on 30 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

fcsa_type1, between−person term


114 of 1378 sets at p < 0.05, 0 at BH < 0.05.

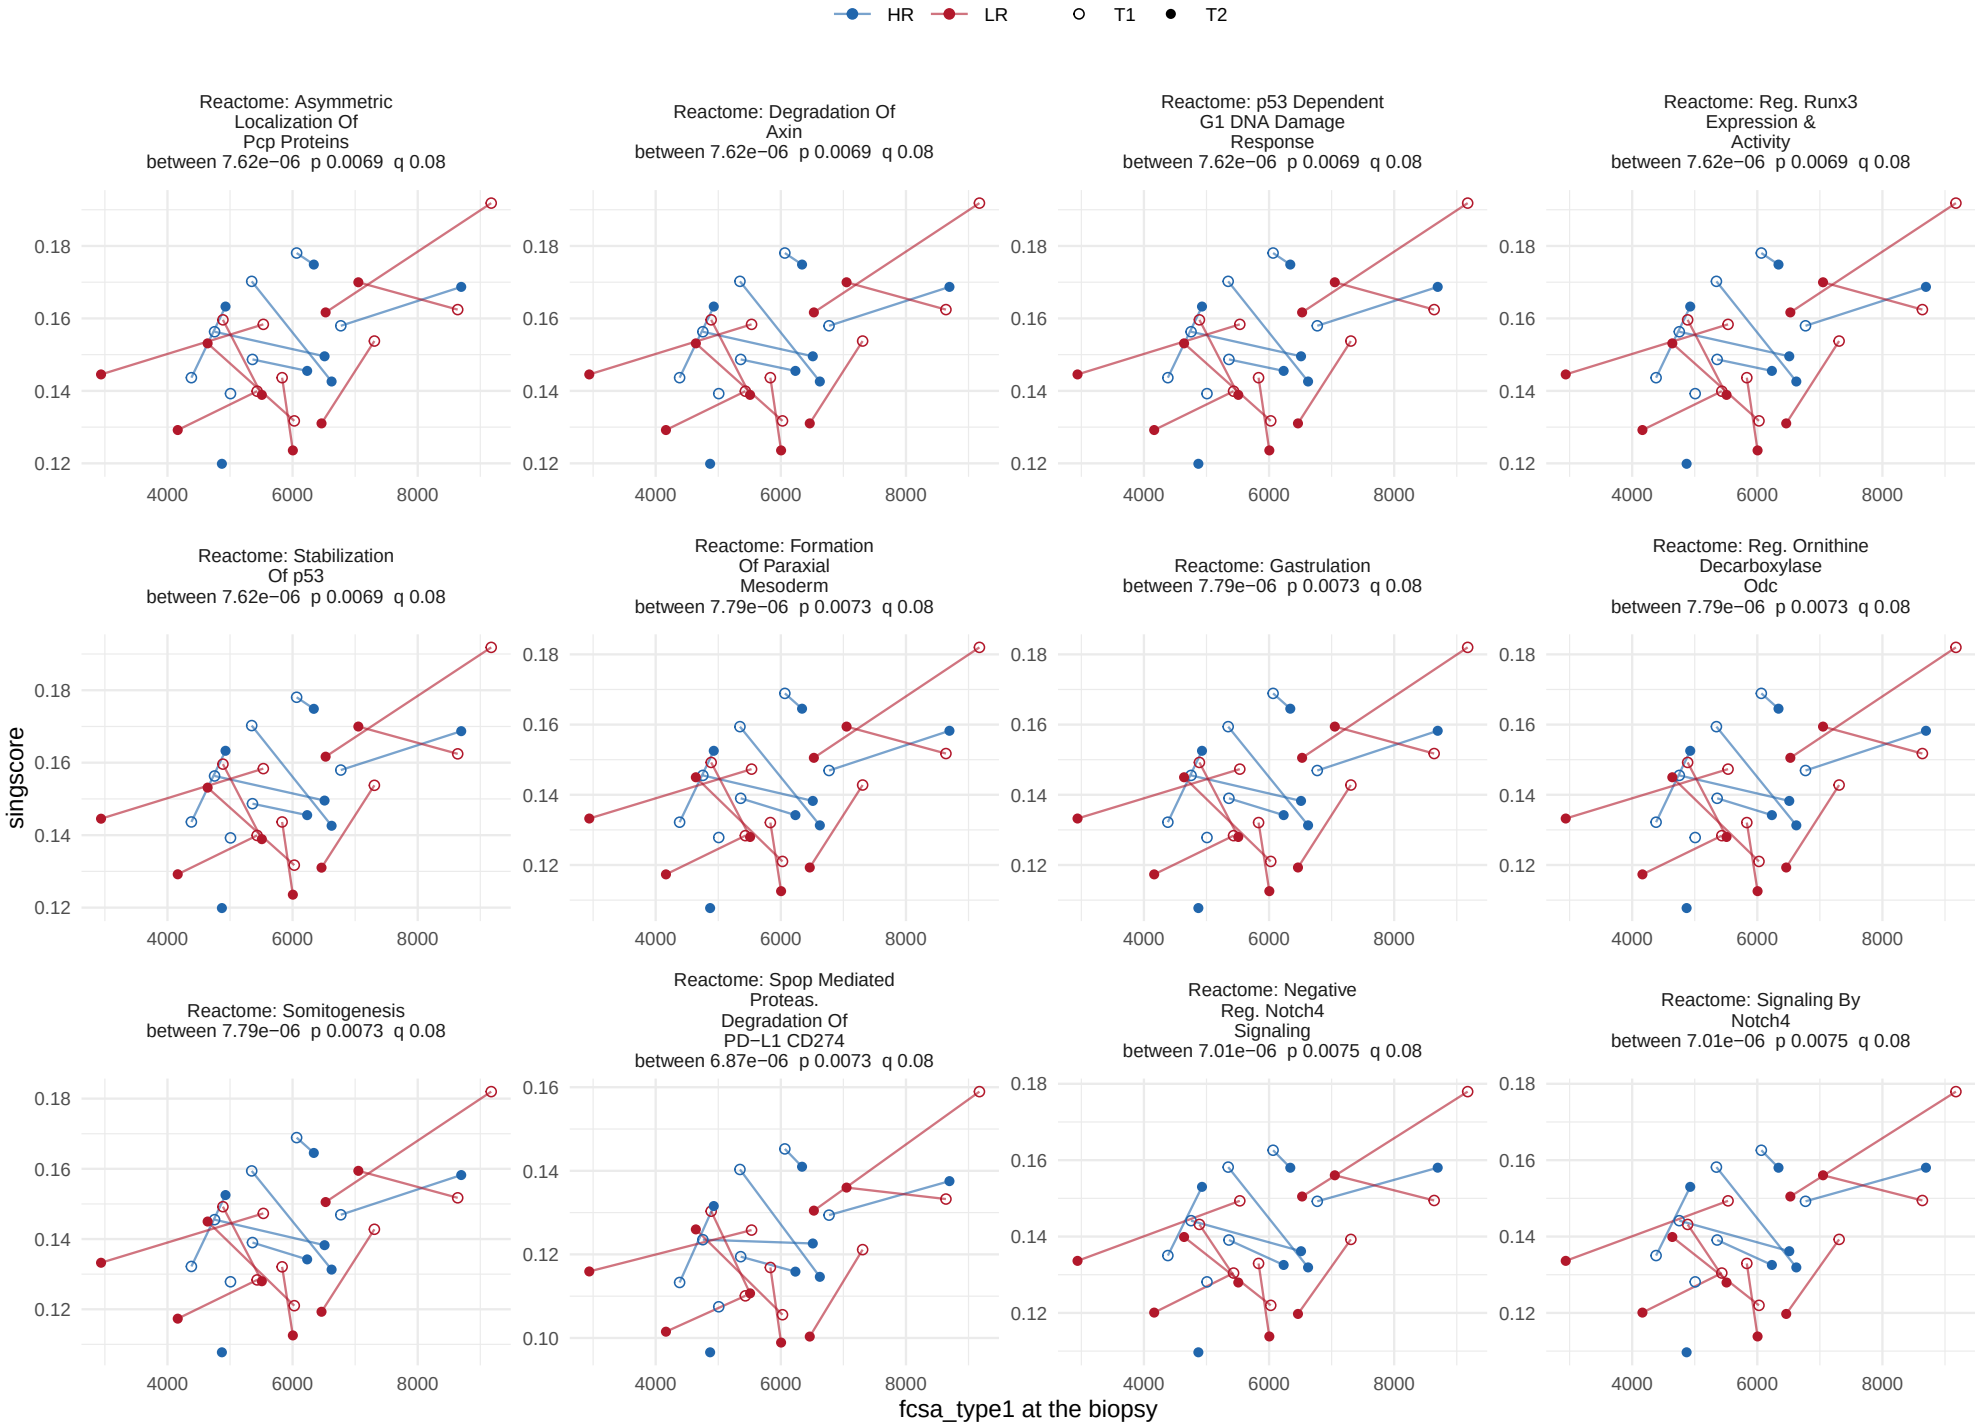

limma on 30 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

fcsa_type1, between−person term


114 of 1378 sets at p < 0.05, 0 at BH < 0.05.

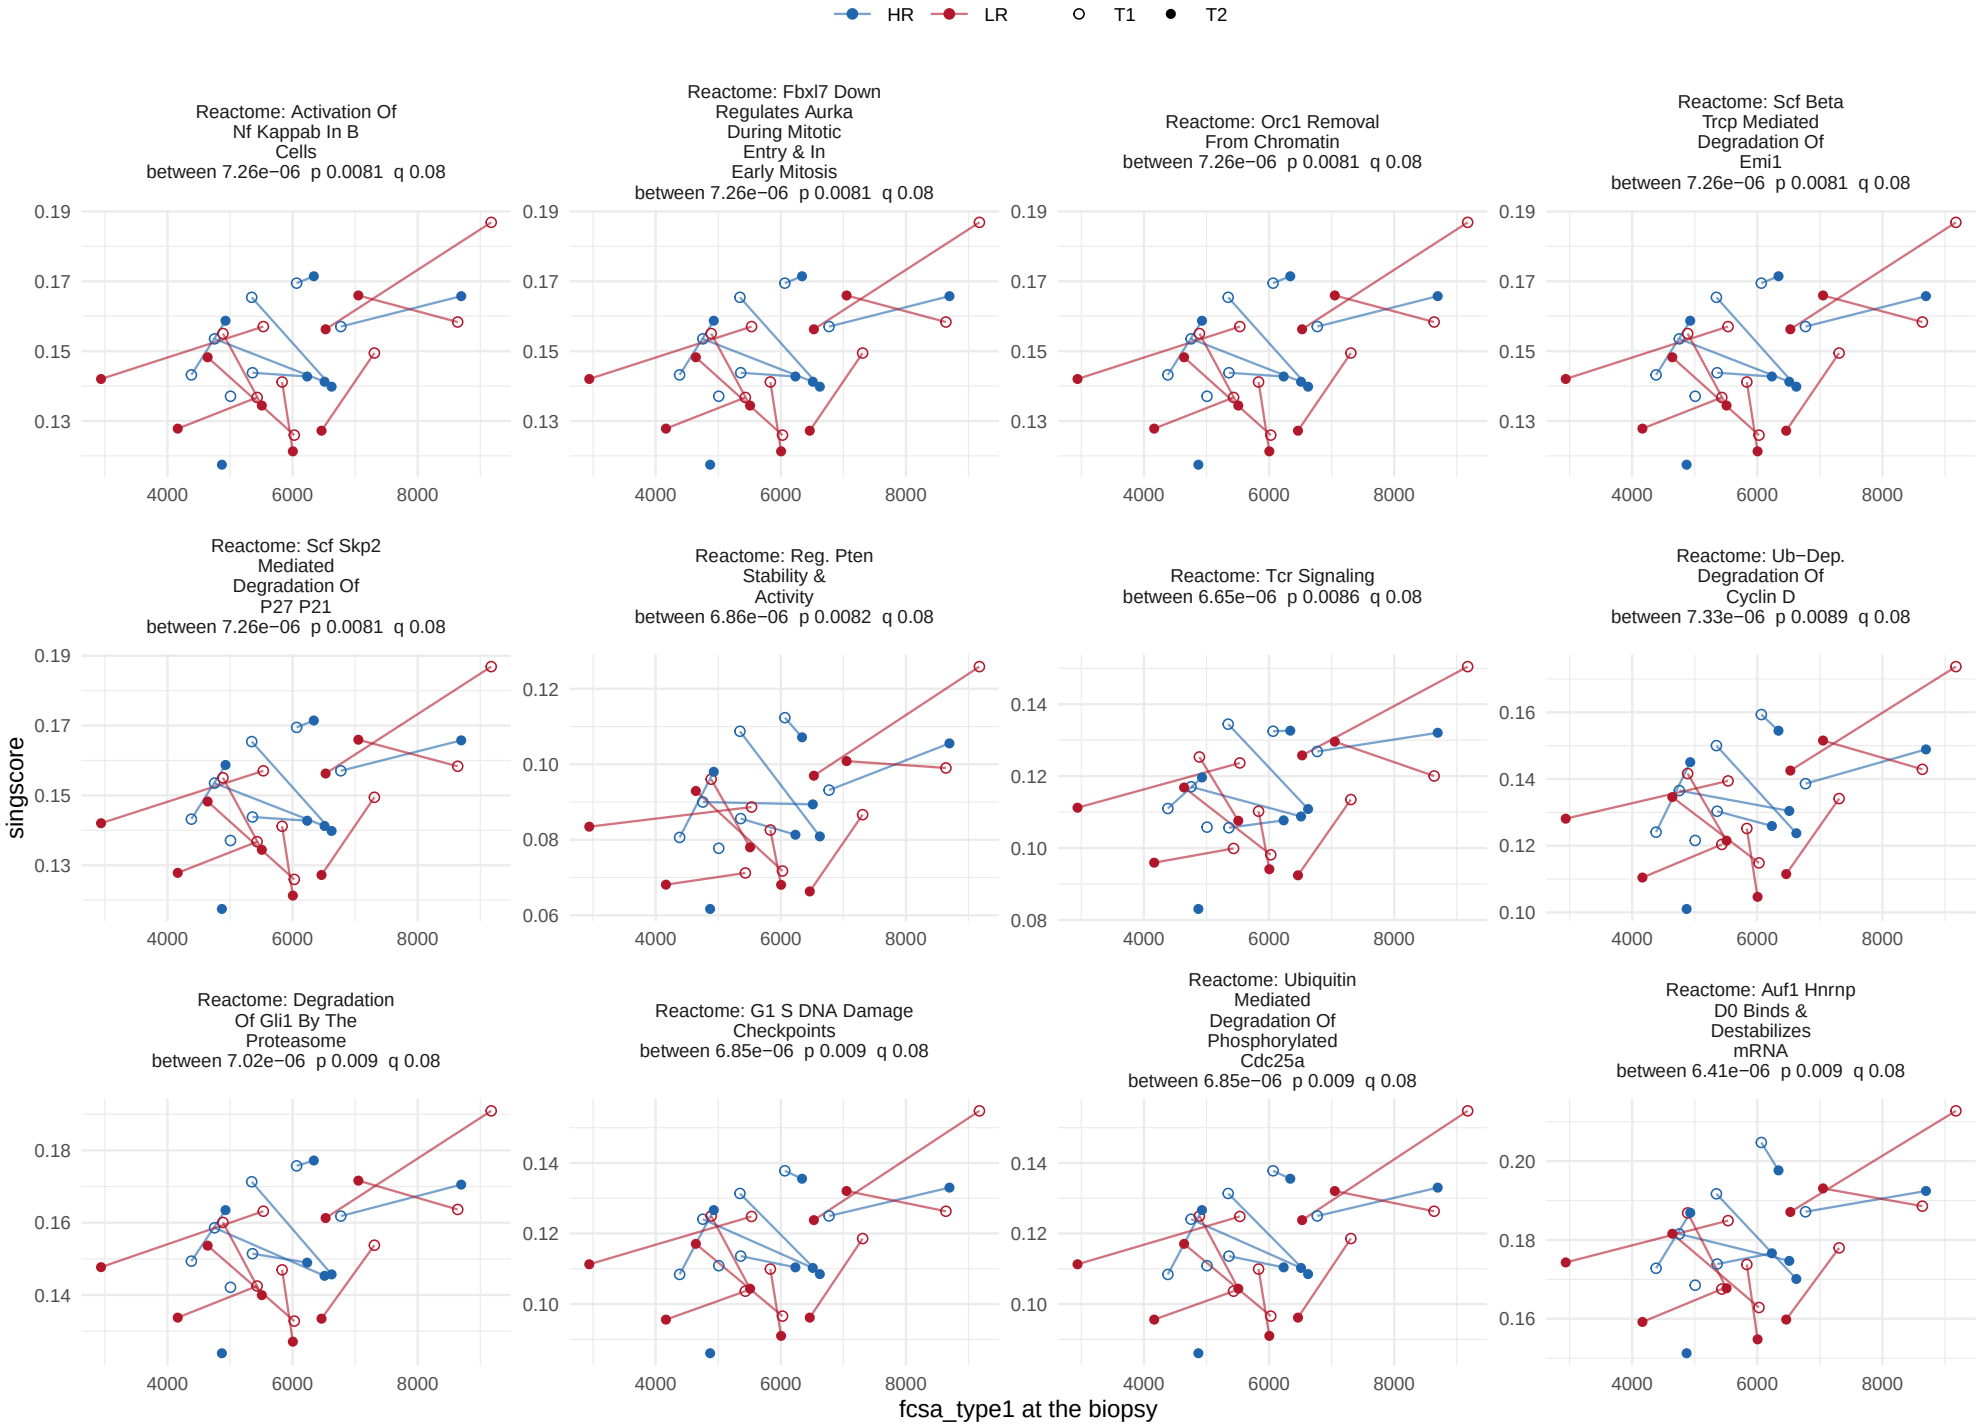

limma on 30 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

fcsa_type1, between−person term


114 of 1378 sets at p < 0.05, 0 at BH < 0.05.

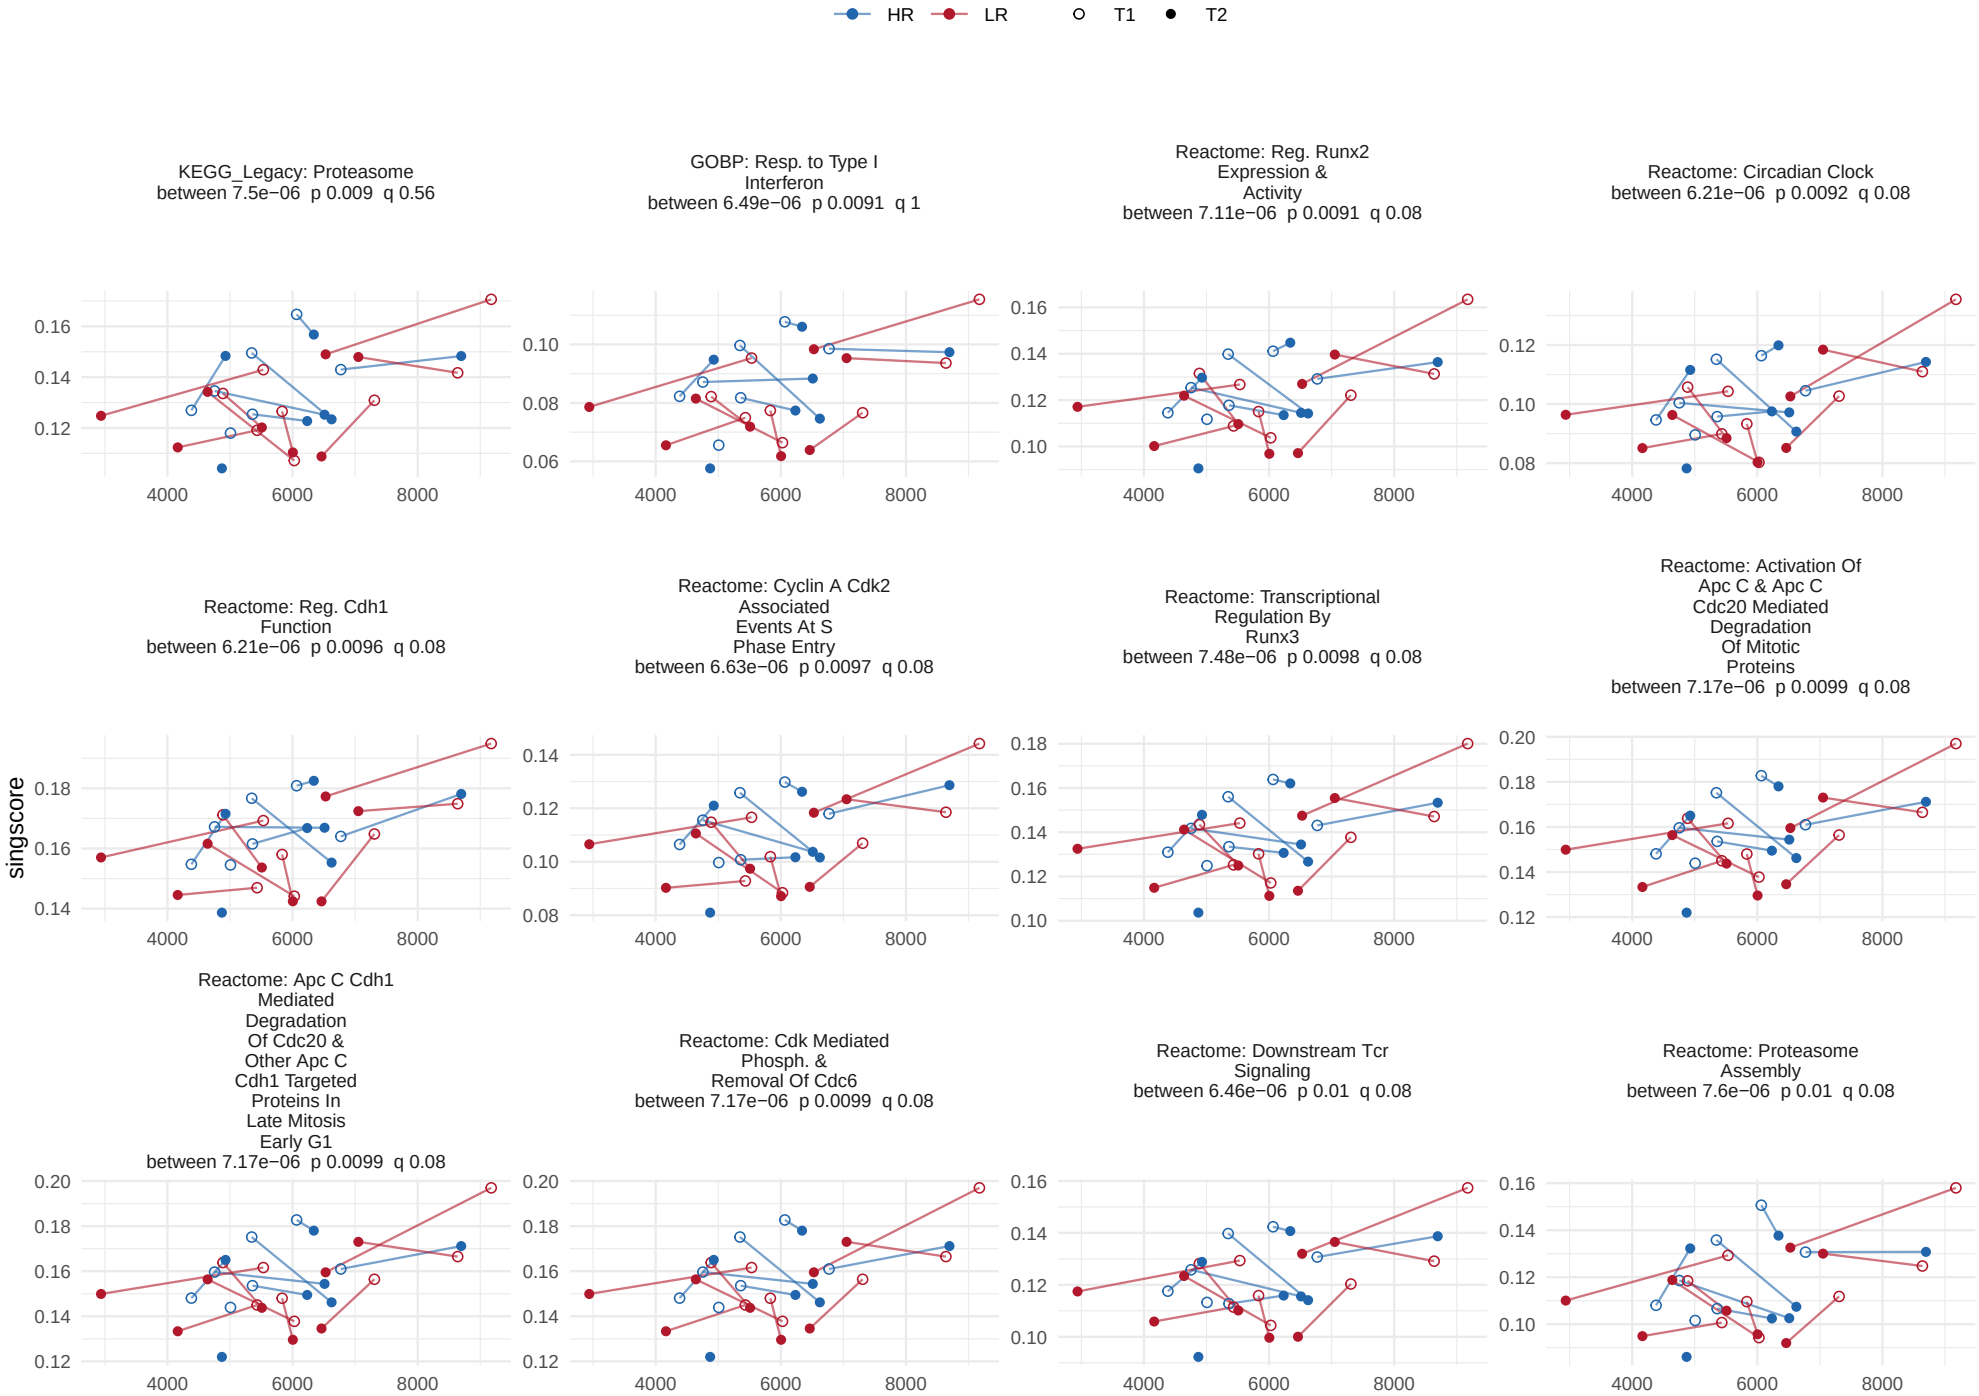

limma on 30 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

fcsa_type1, between−person term


114 of 1378 sets at p < 0.05, 0 at BH < 0.05.

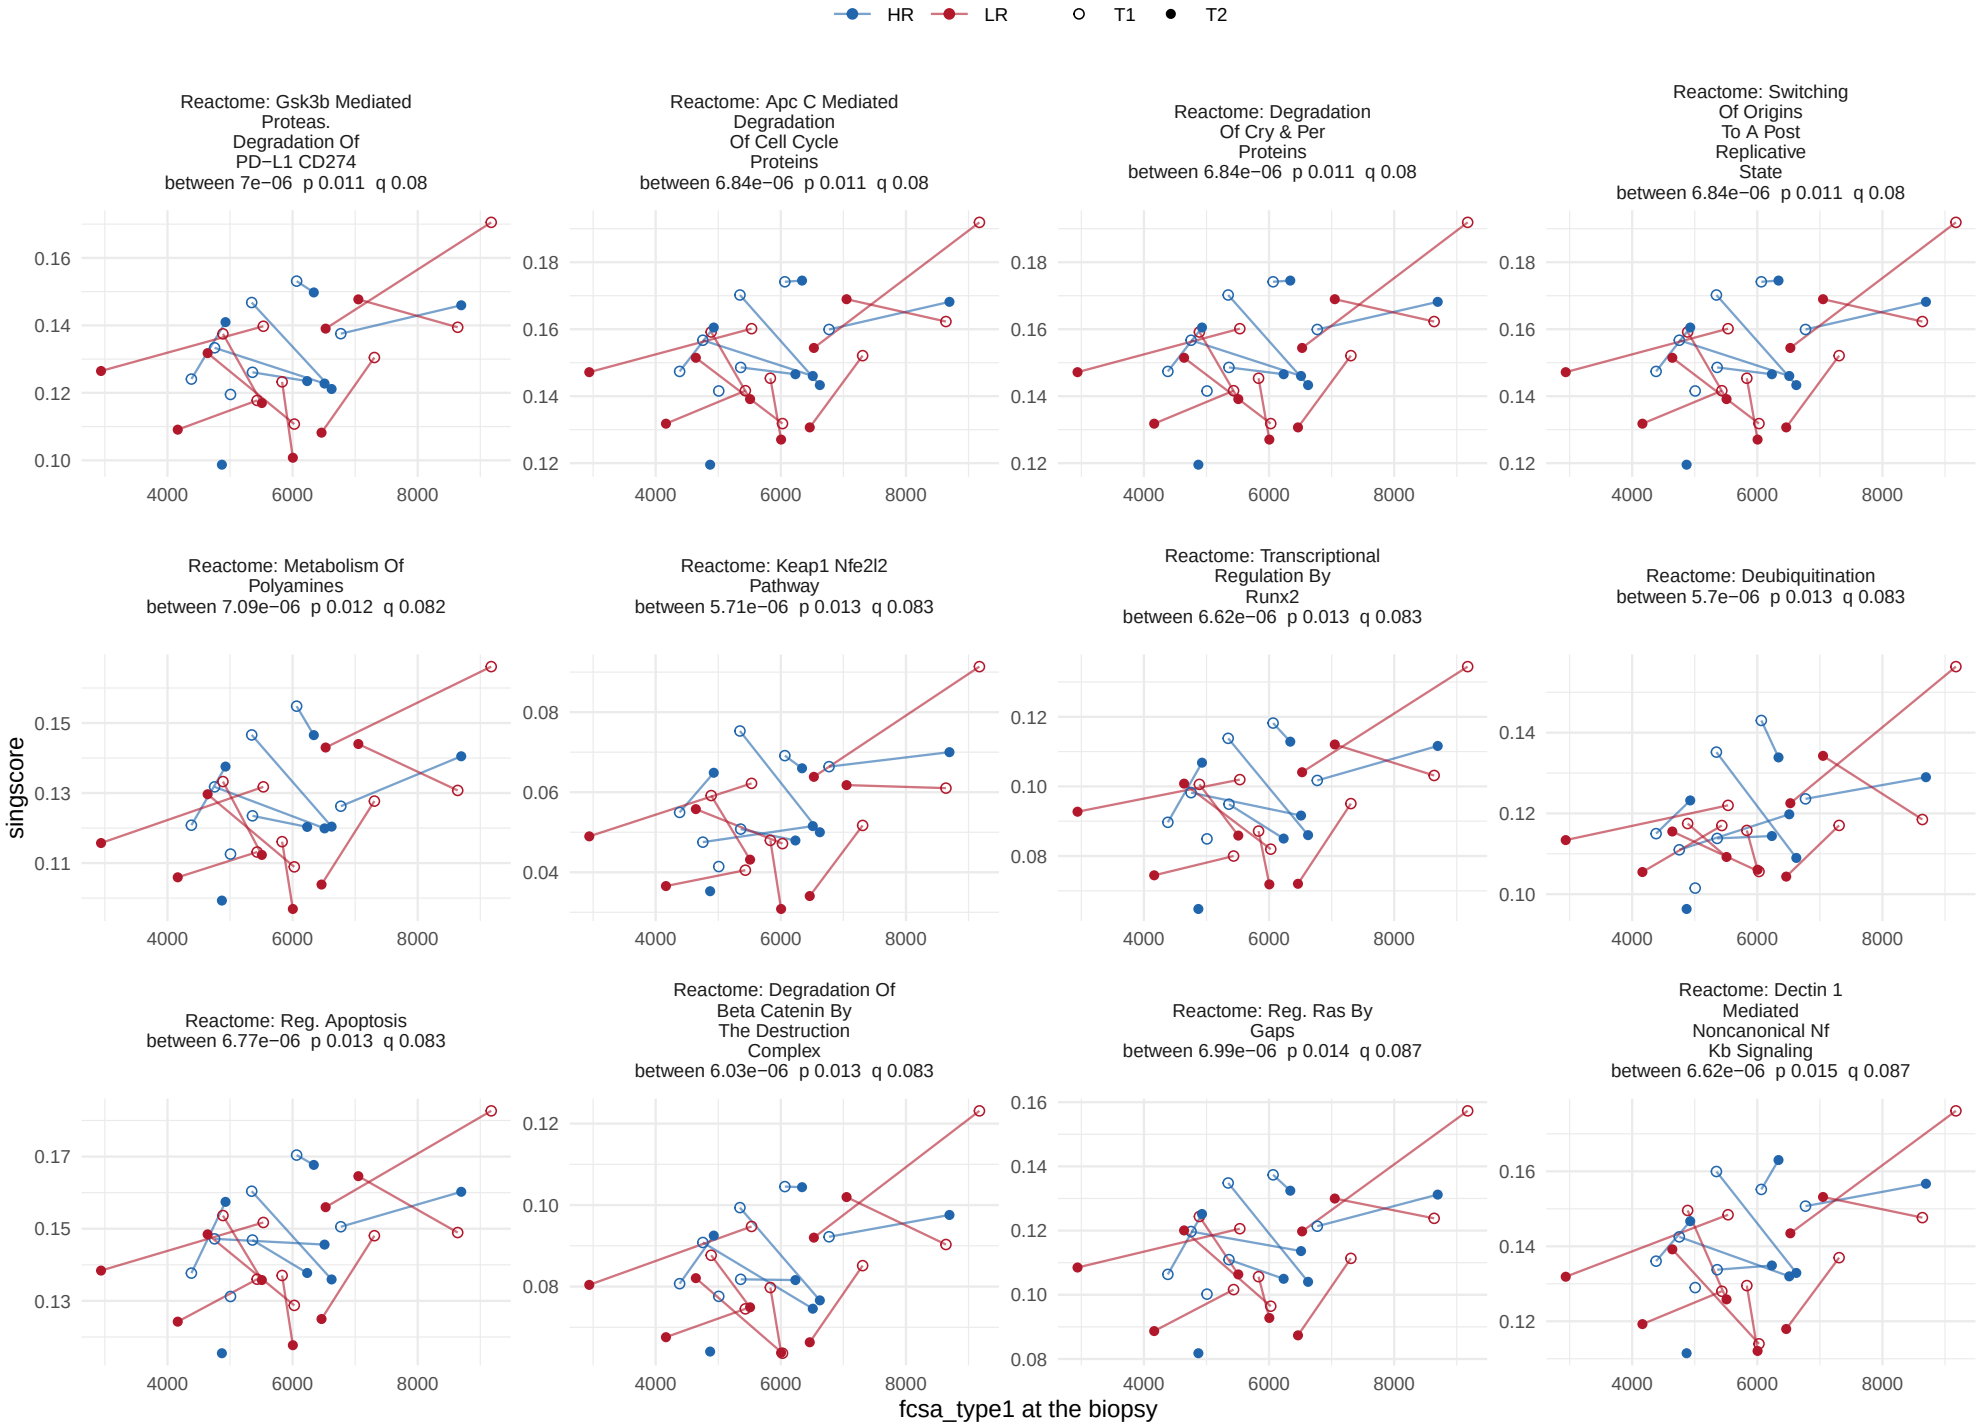

limma on 30 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

fcsa_type1, between−person term


114 of 1378 sets at p < 0.05, 0 at BH < 0.05.

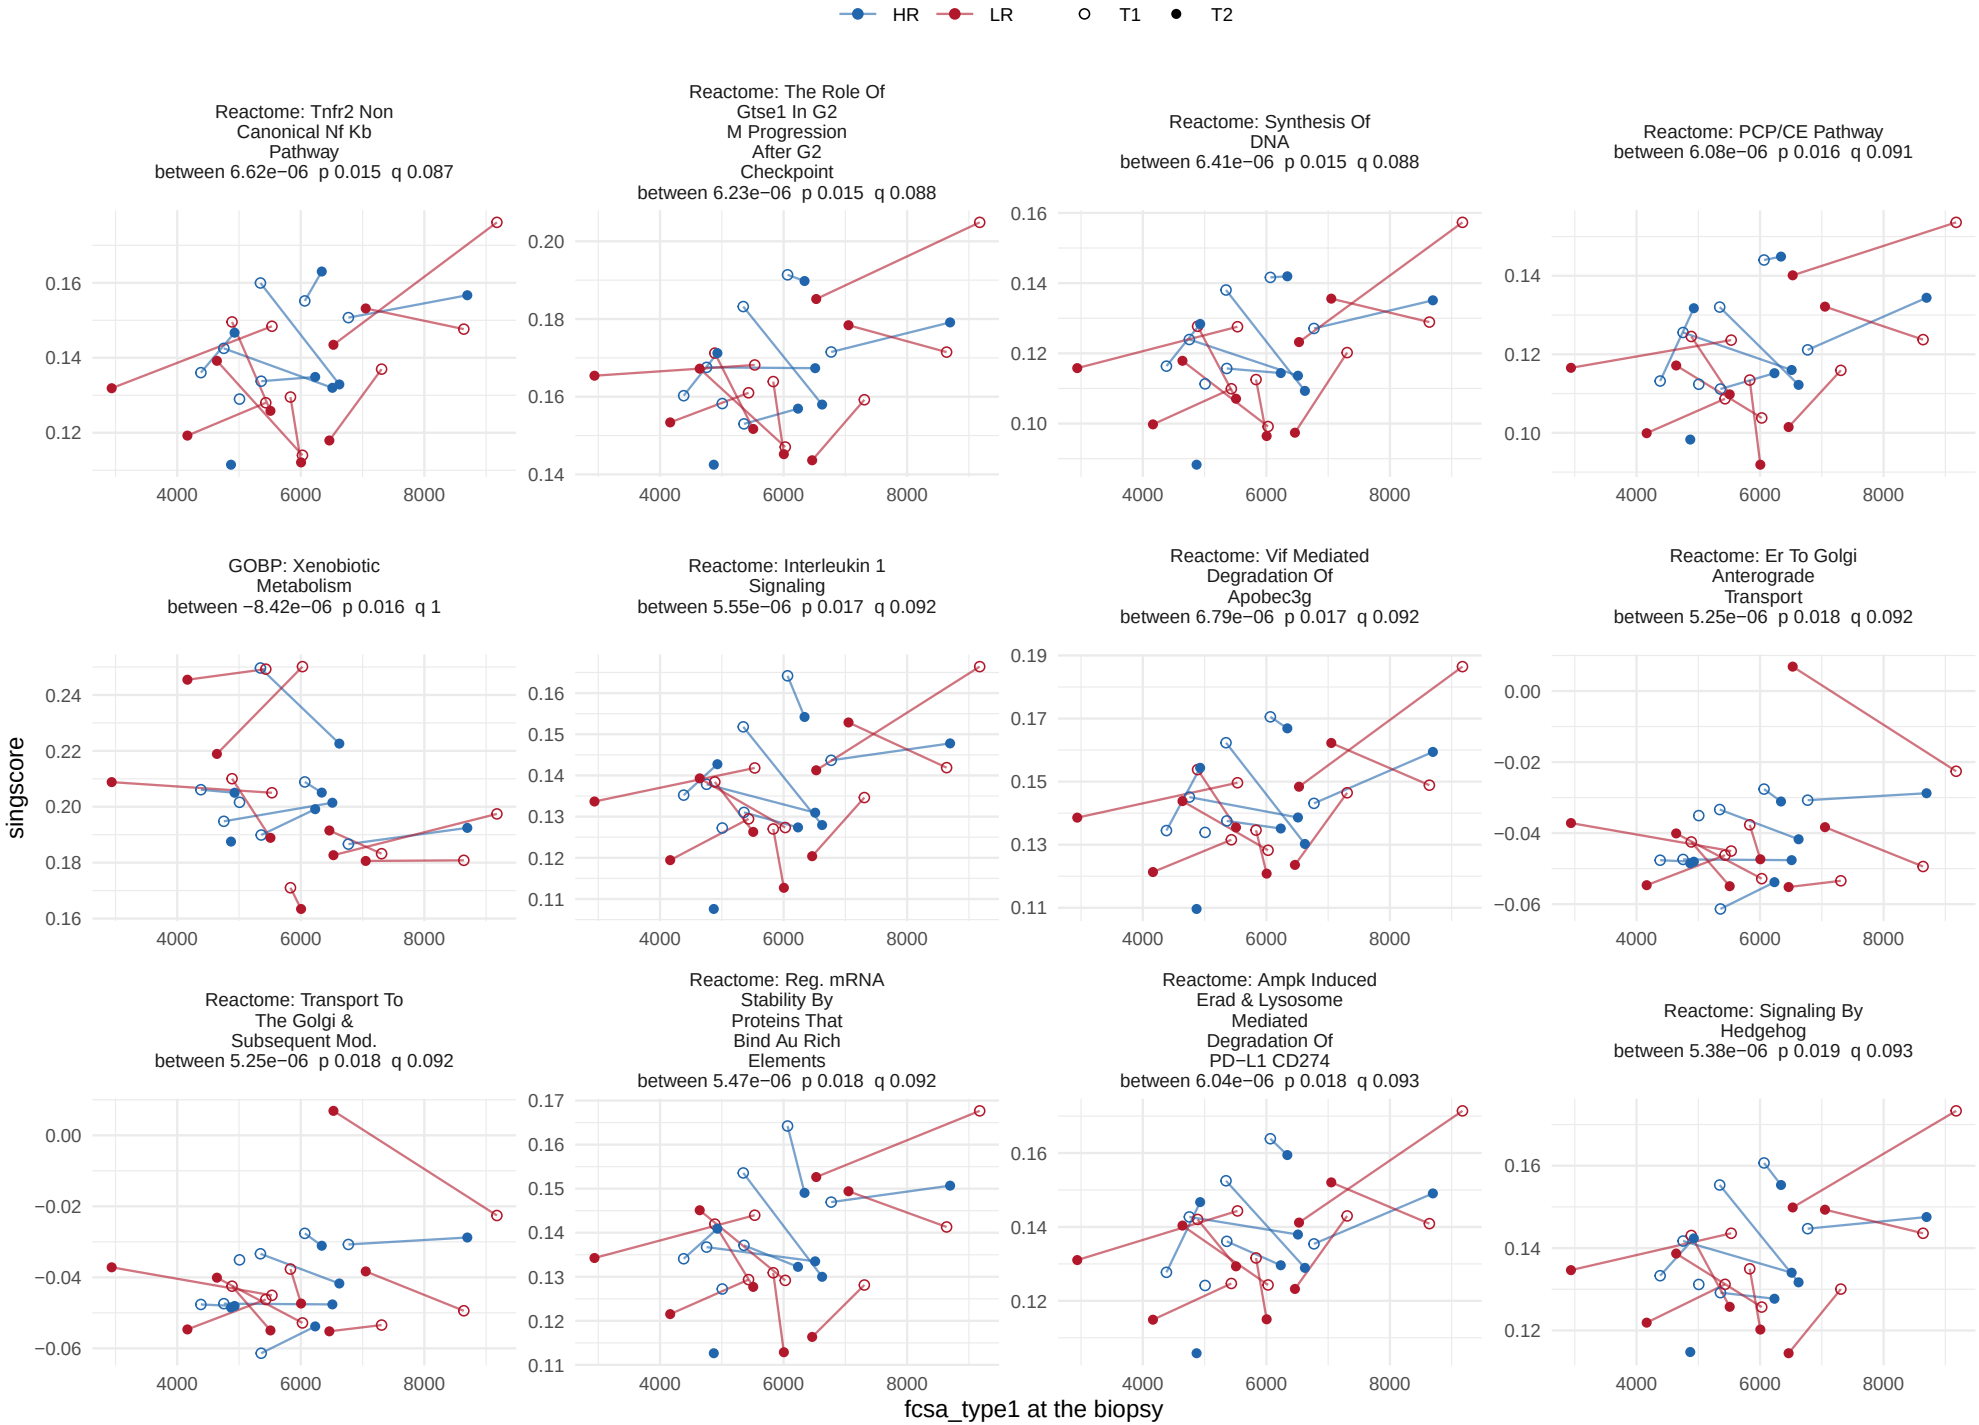

limma on 30 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

fcsa_type1, between−person term


114 of 1378 sets at p < 0.05, 0 at BH < 0.05.

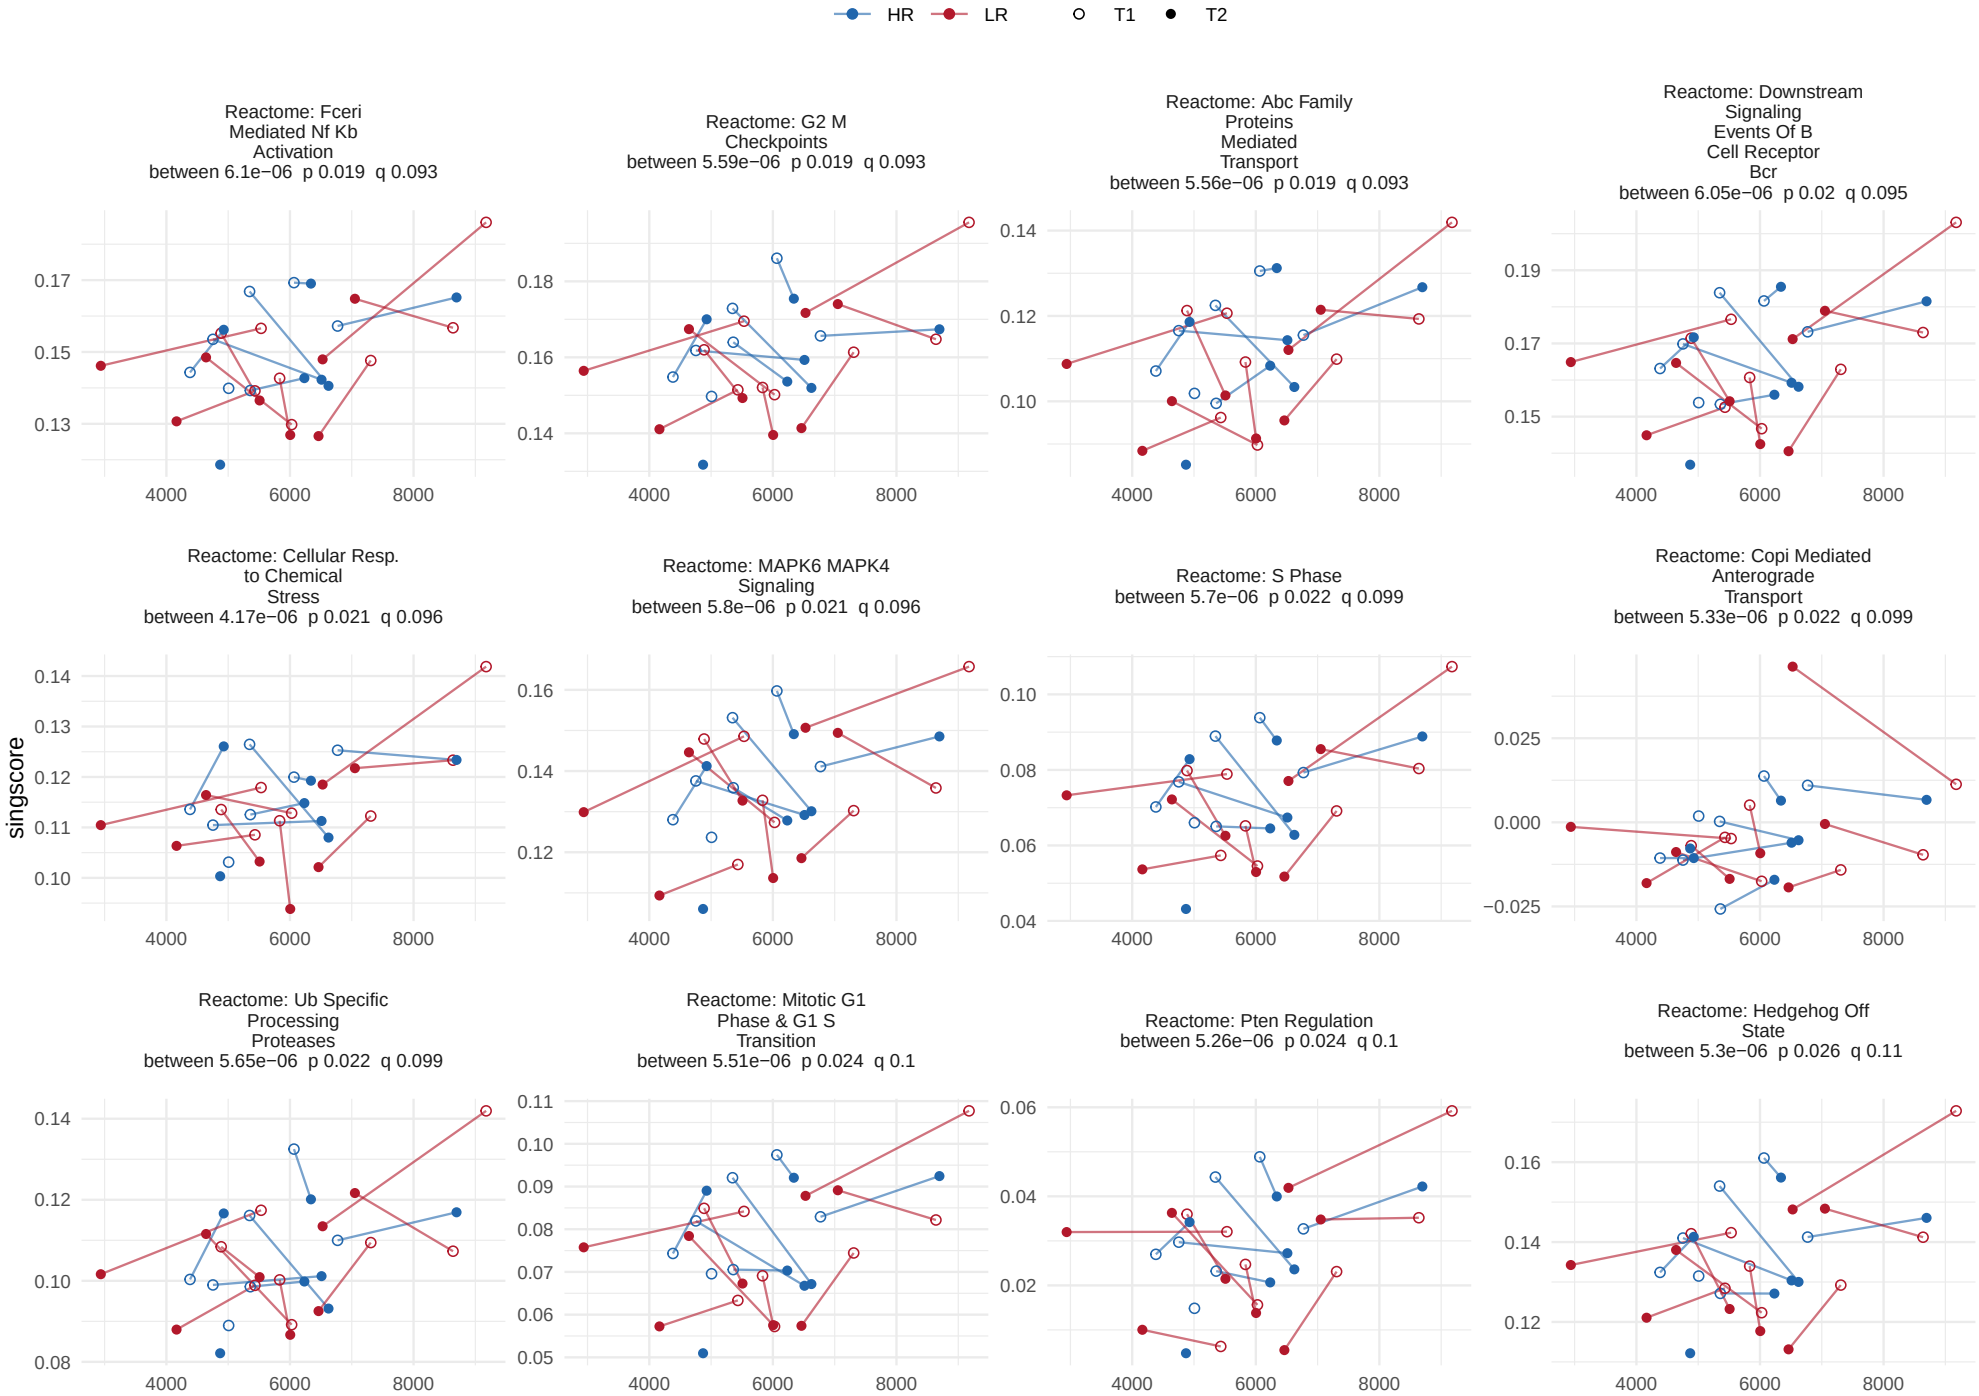

limma on 30 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

fcsa_type1, between−person term


114 of 1378 sets at p < 0.05, 0 at BH < 0.05.

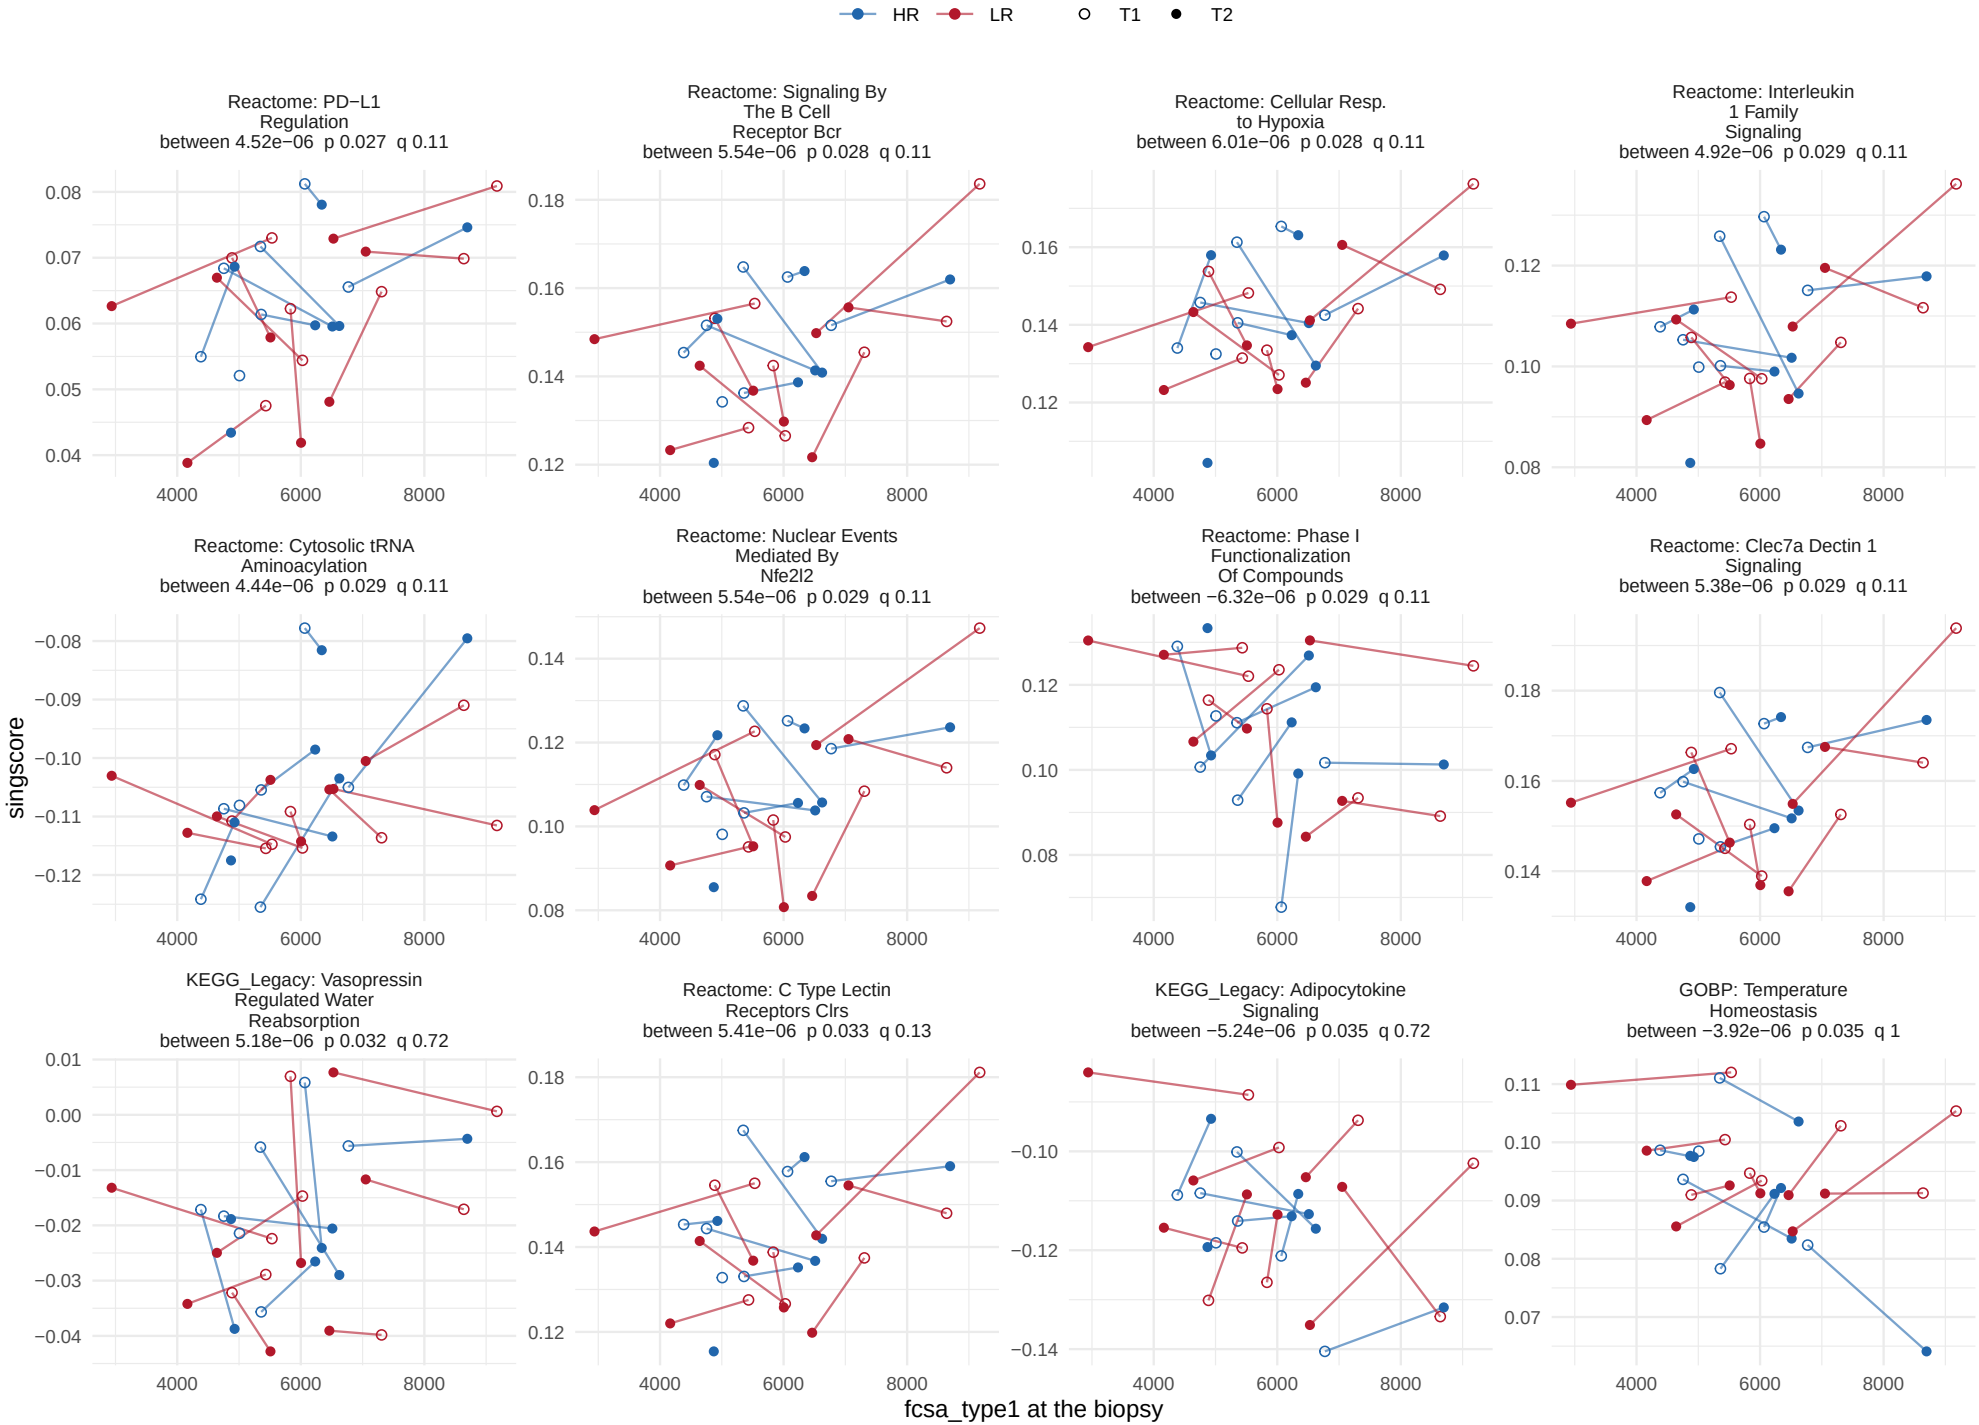

limma on 30 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

fcsa_type1, between−person term


114 of 1378 sets at p < 0.05, 0 at BH < 0.05.

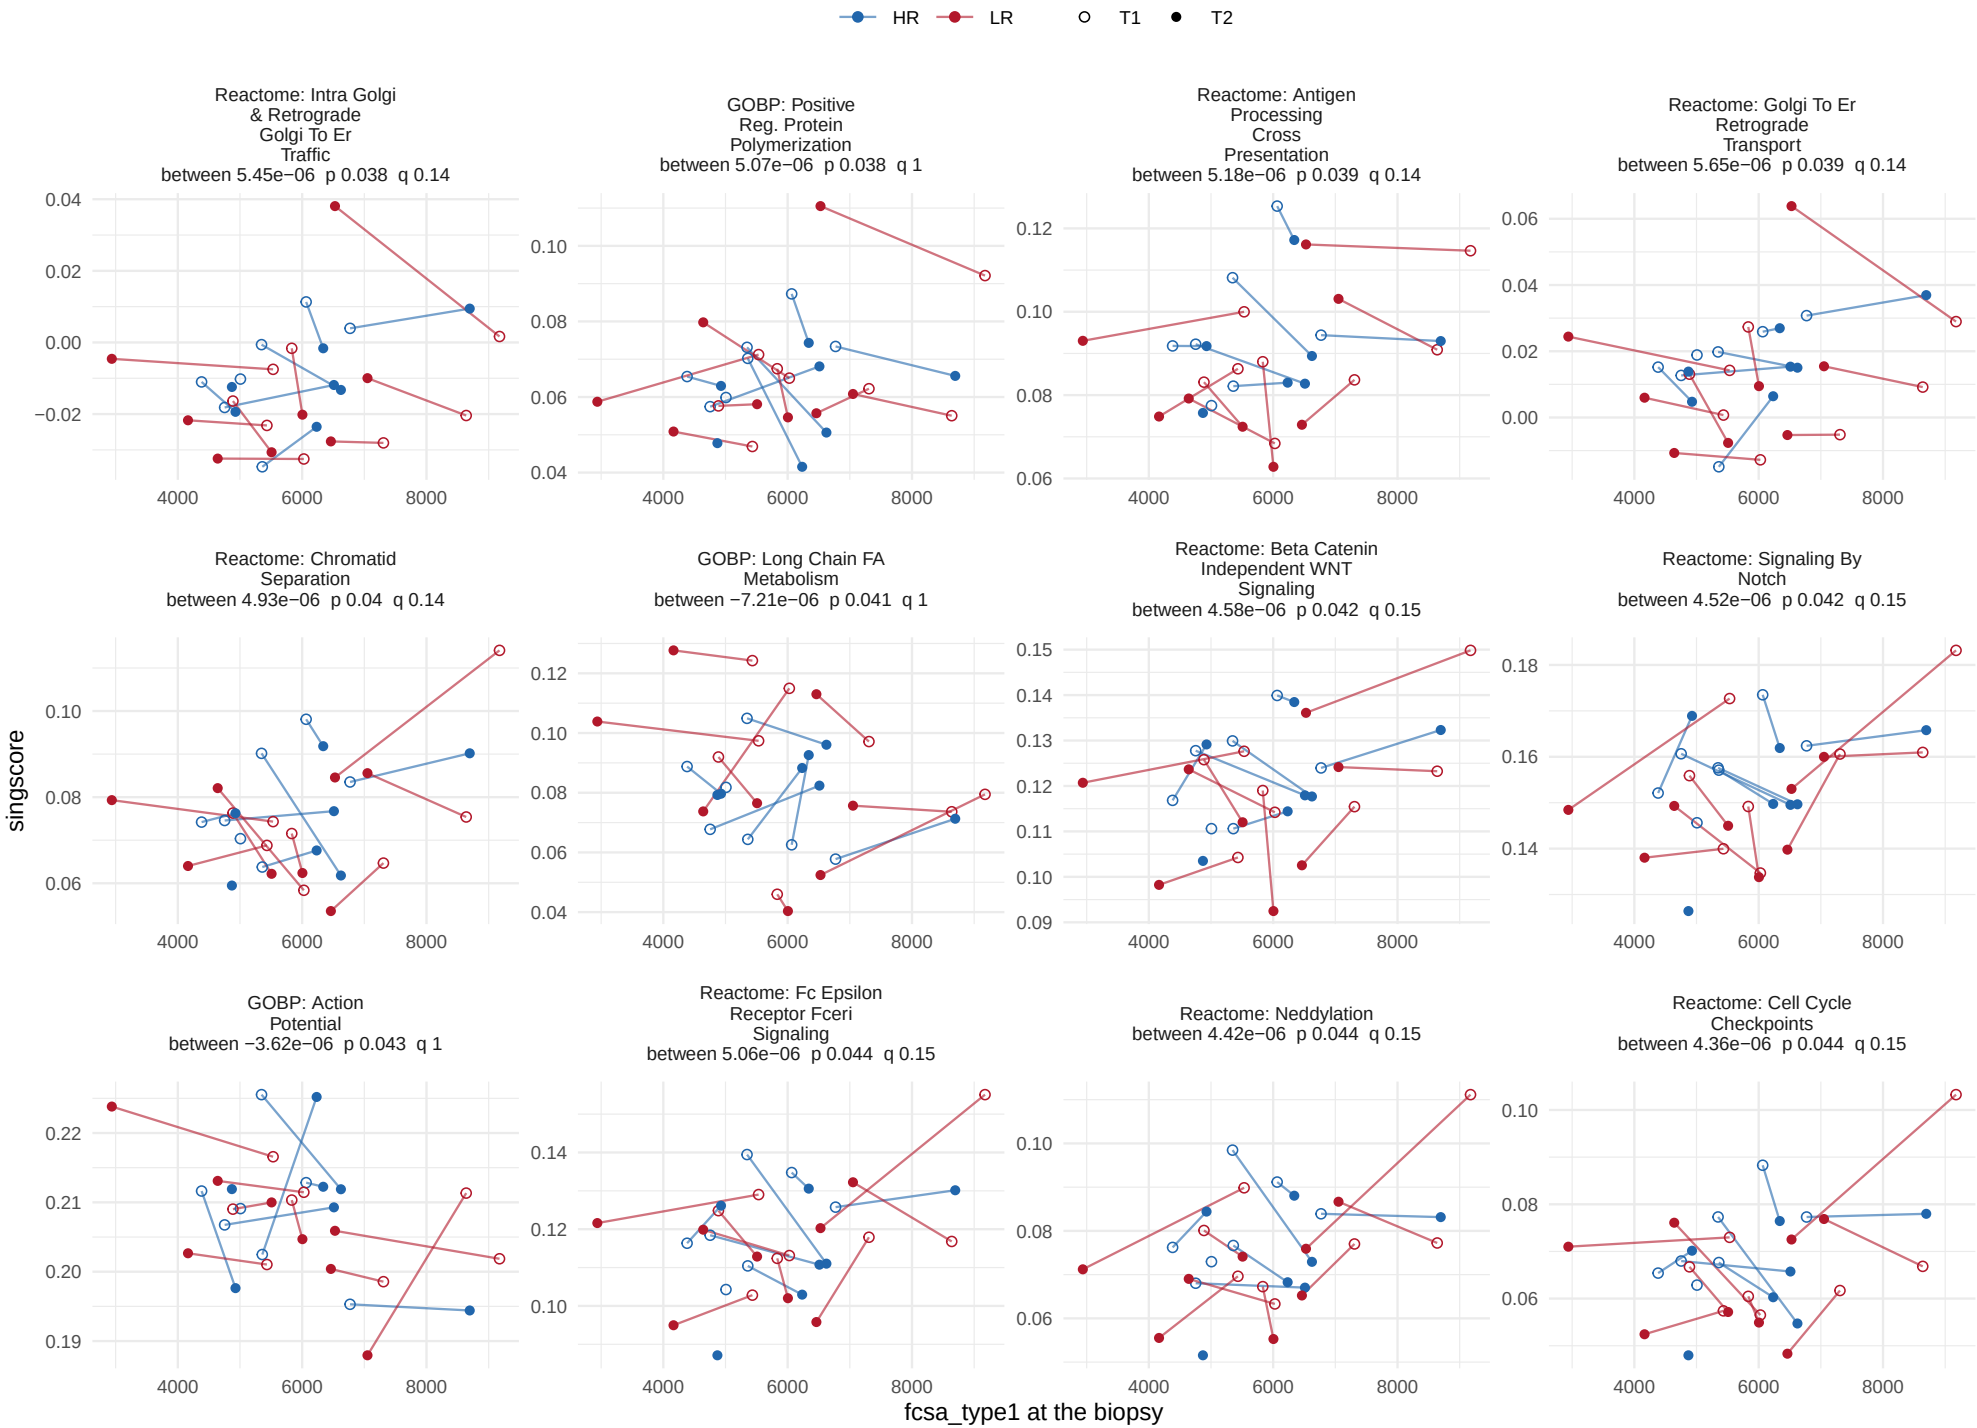

limma on 30 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

fcsa_type1, between−person term


114 of 1378 sets at p < 0.05, 0 at BH < 0.05.

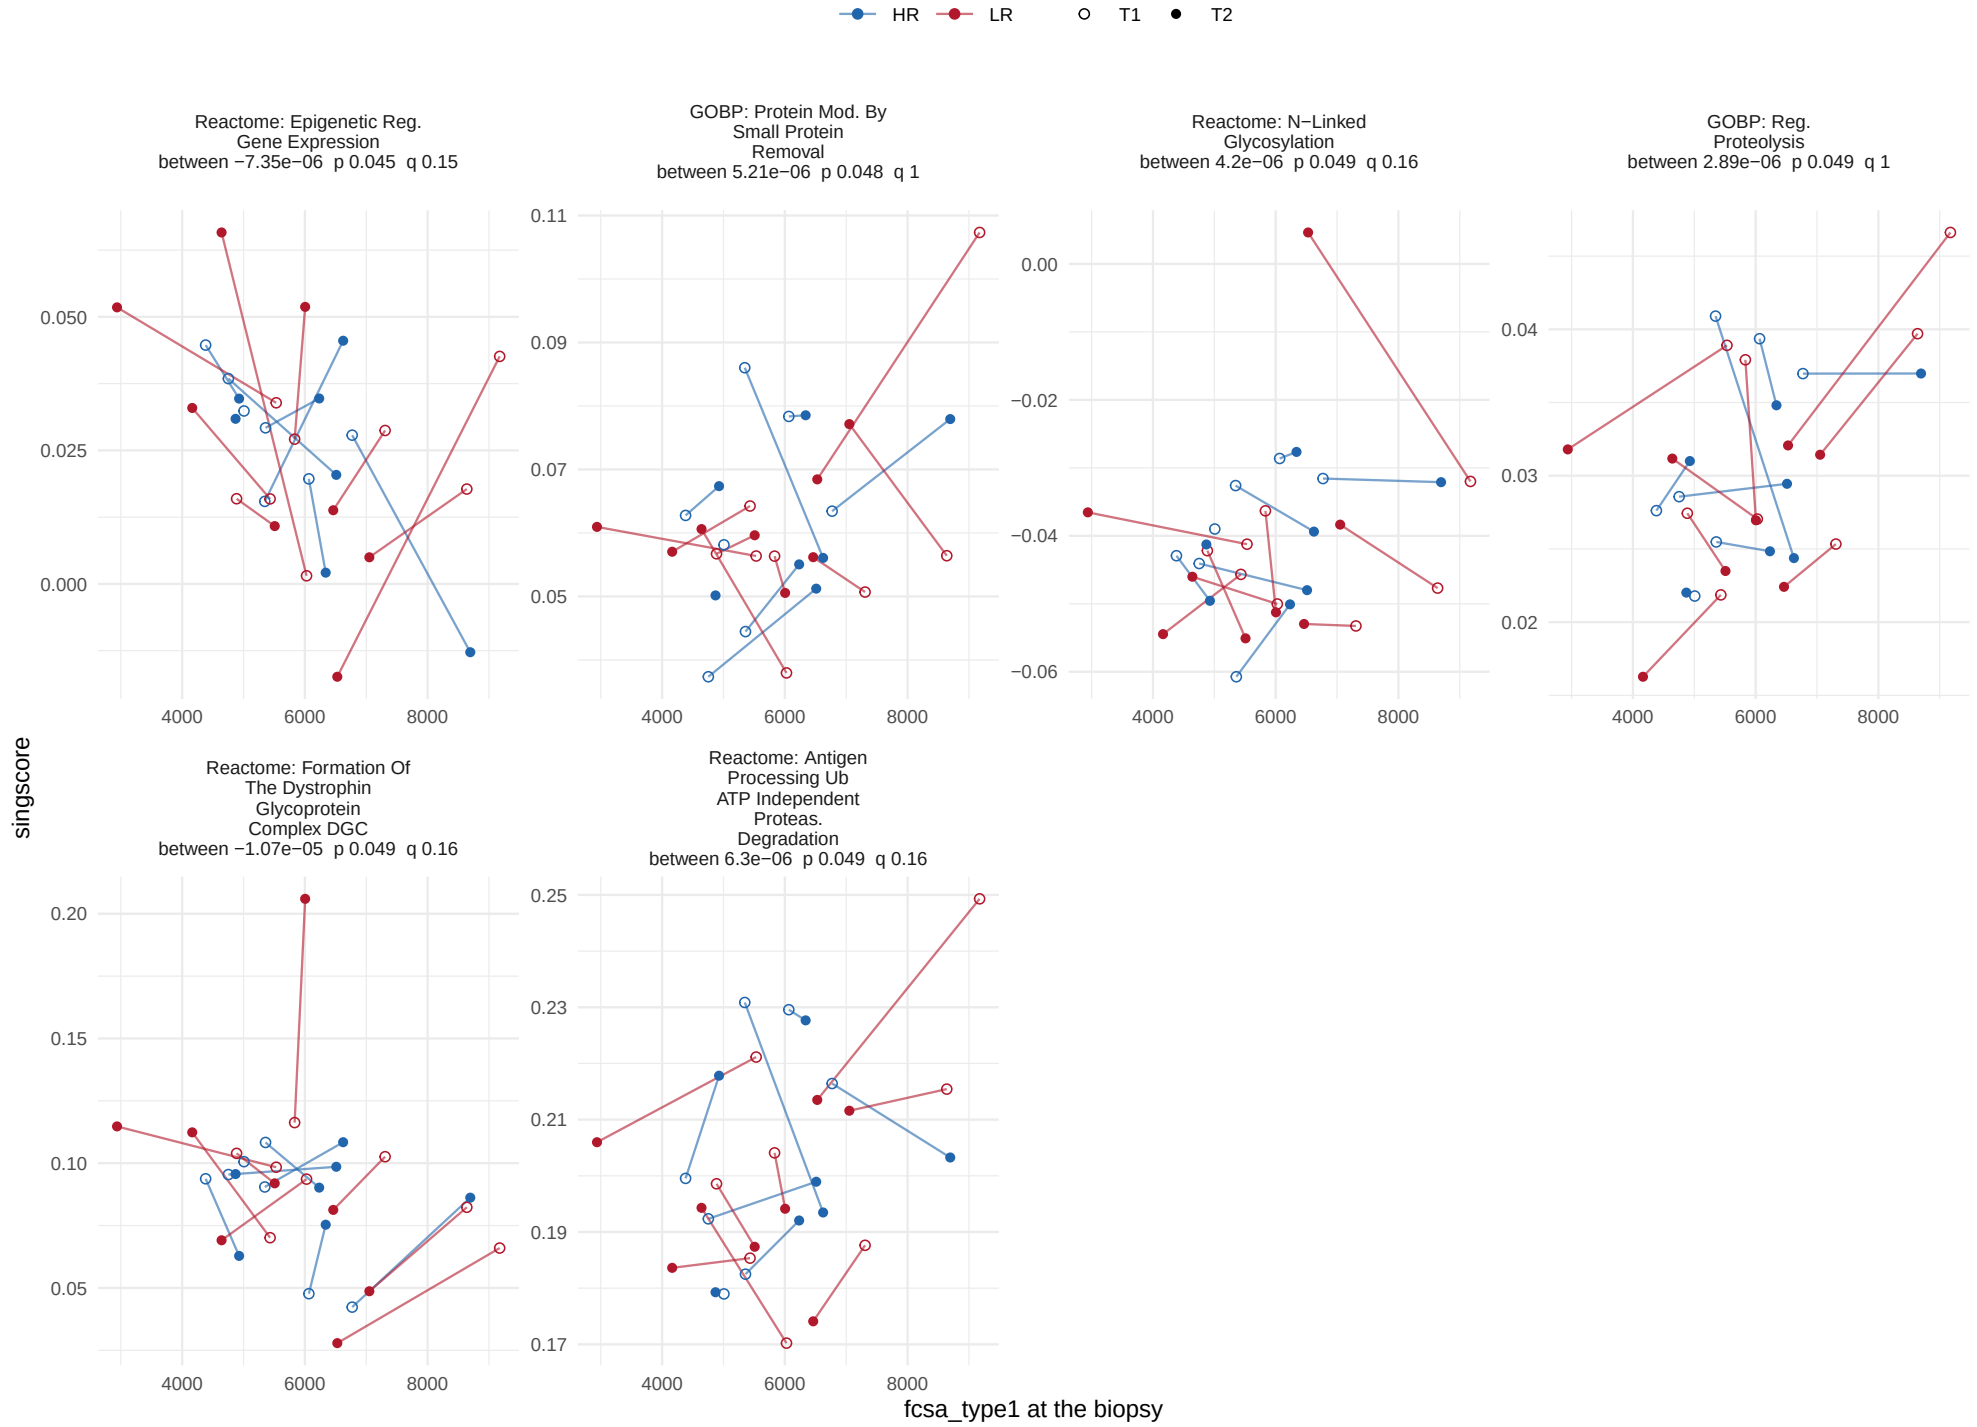

limma on 30 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

fcsa_type1, within−person term


46 of 1378 sets at p < 0.05, 0 at BH < 0.05.

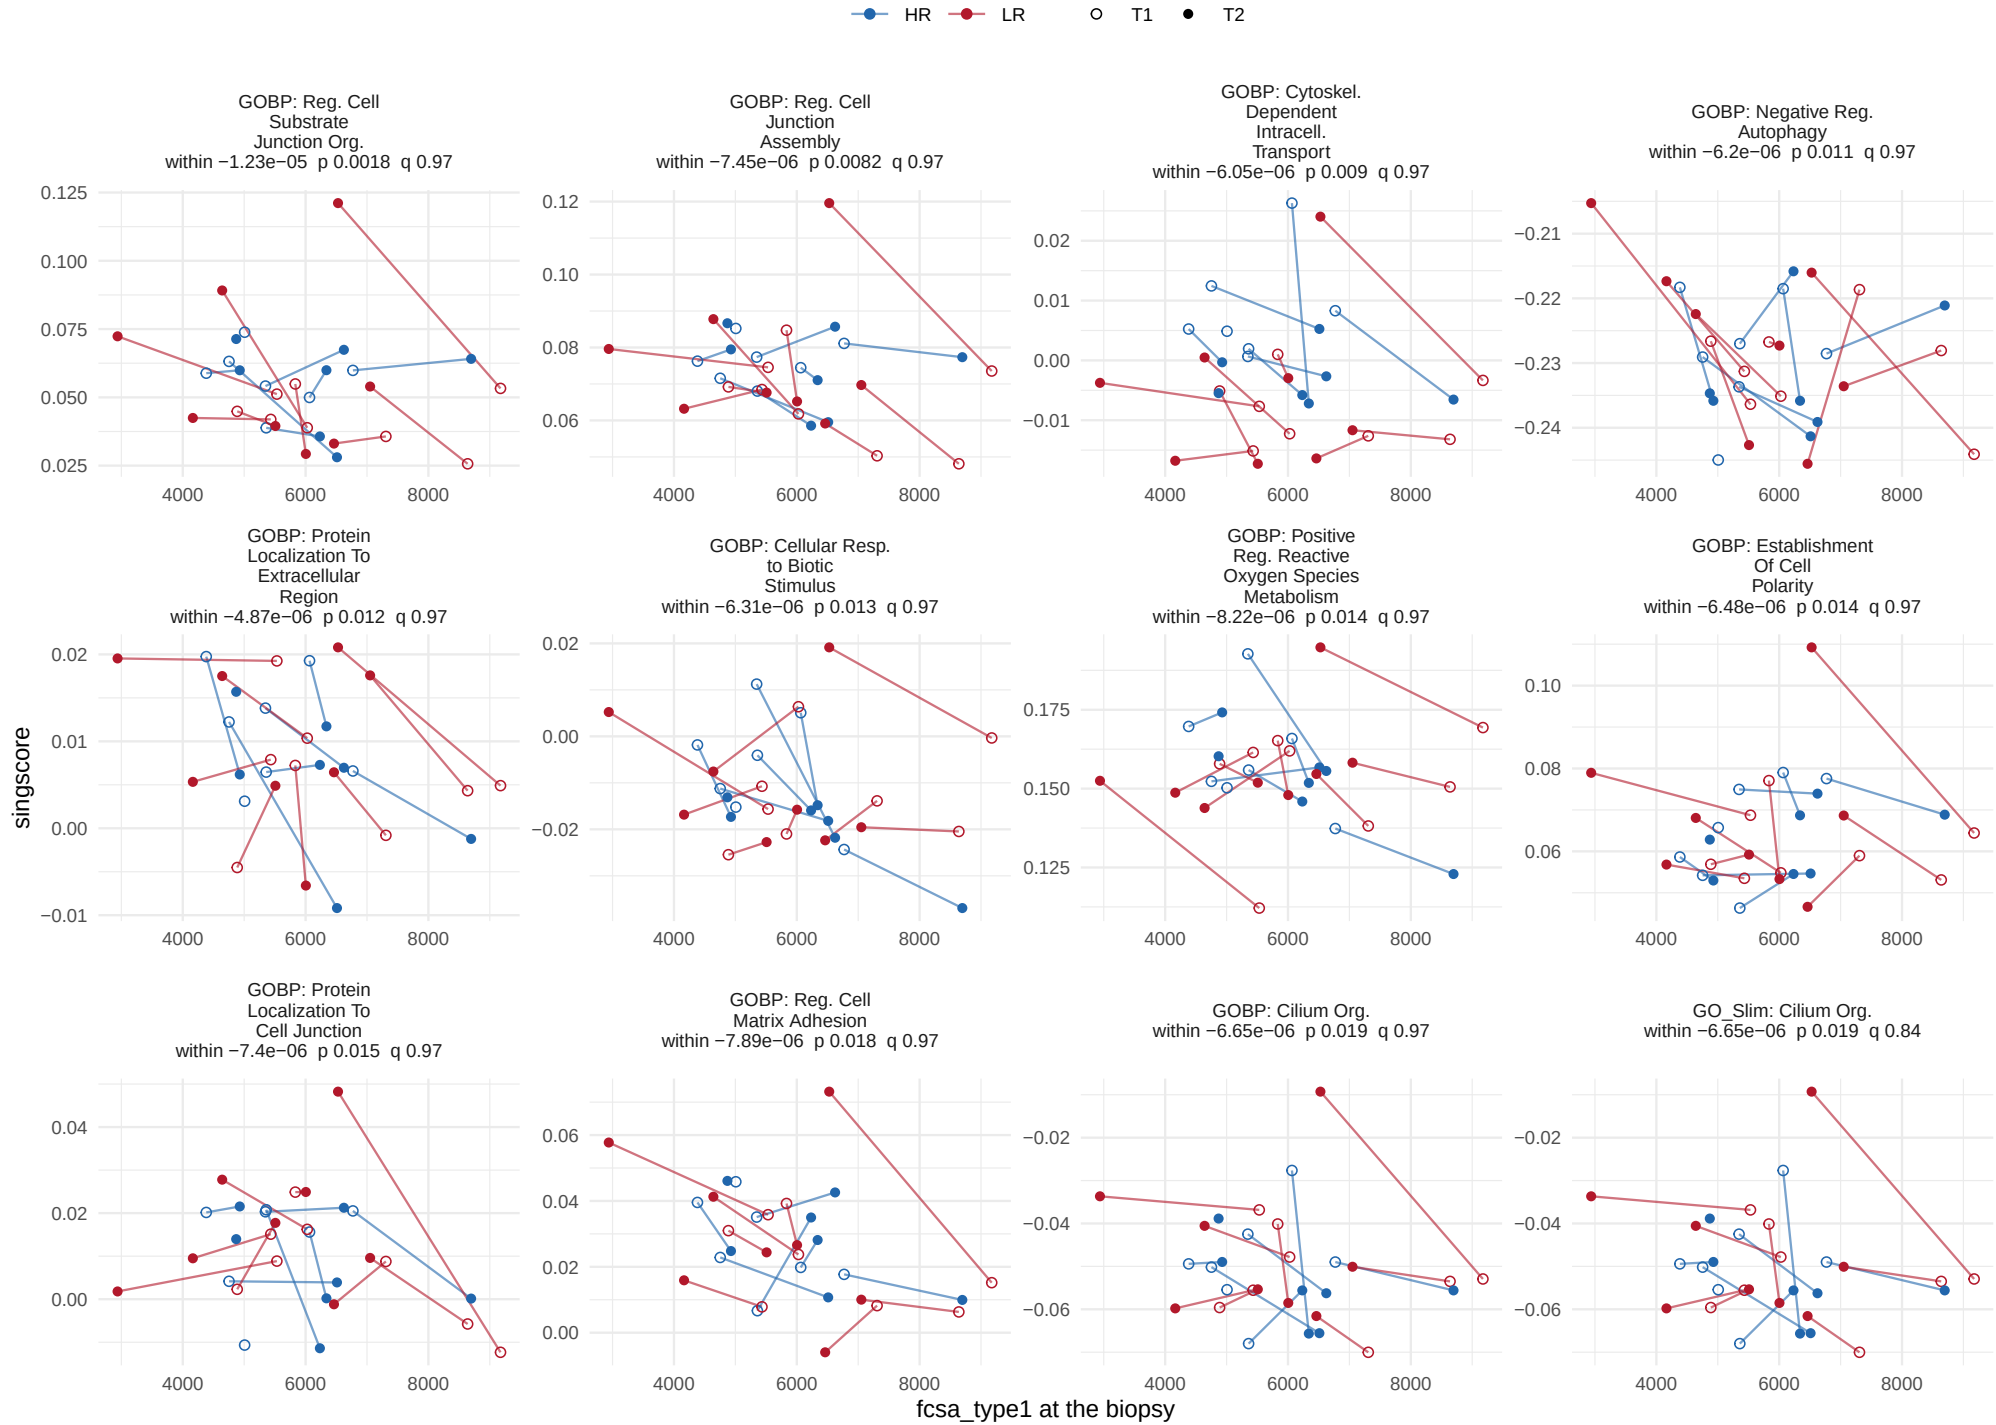

limma on 30 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

fcsa_type1, within−person term


46 of 1378 sets at p < 0.05, 0 at BH < 0.05.

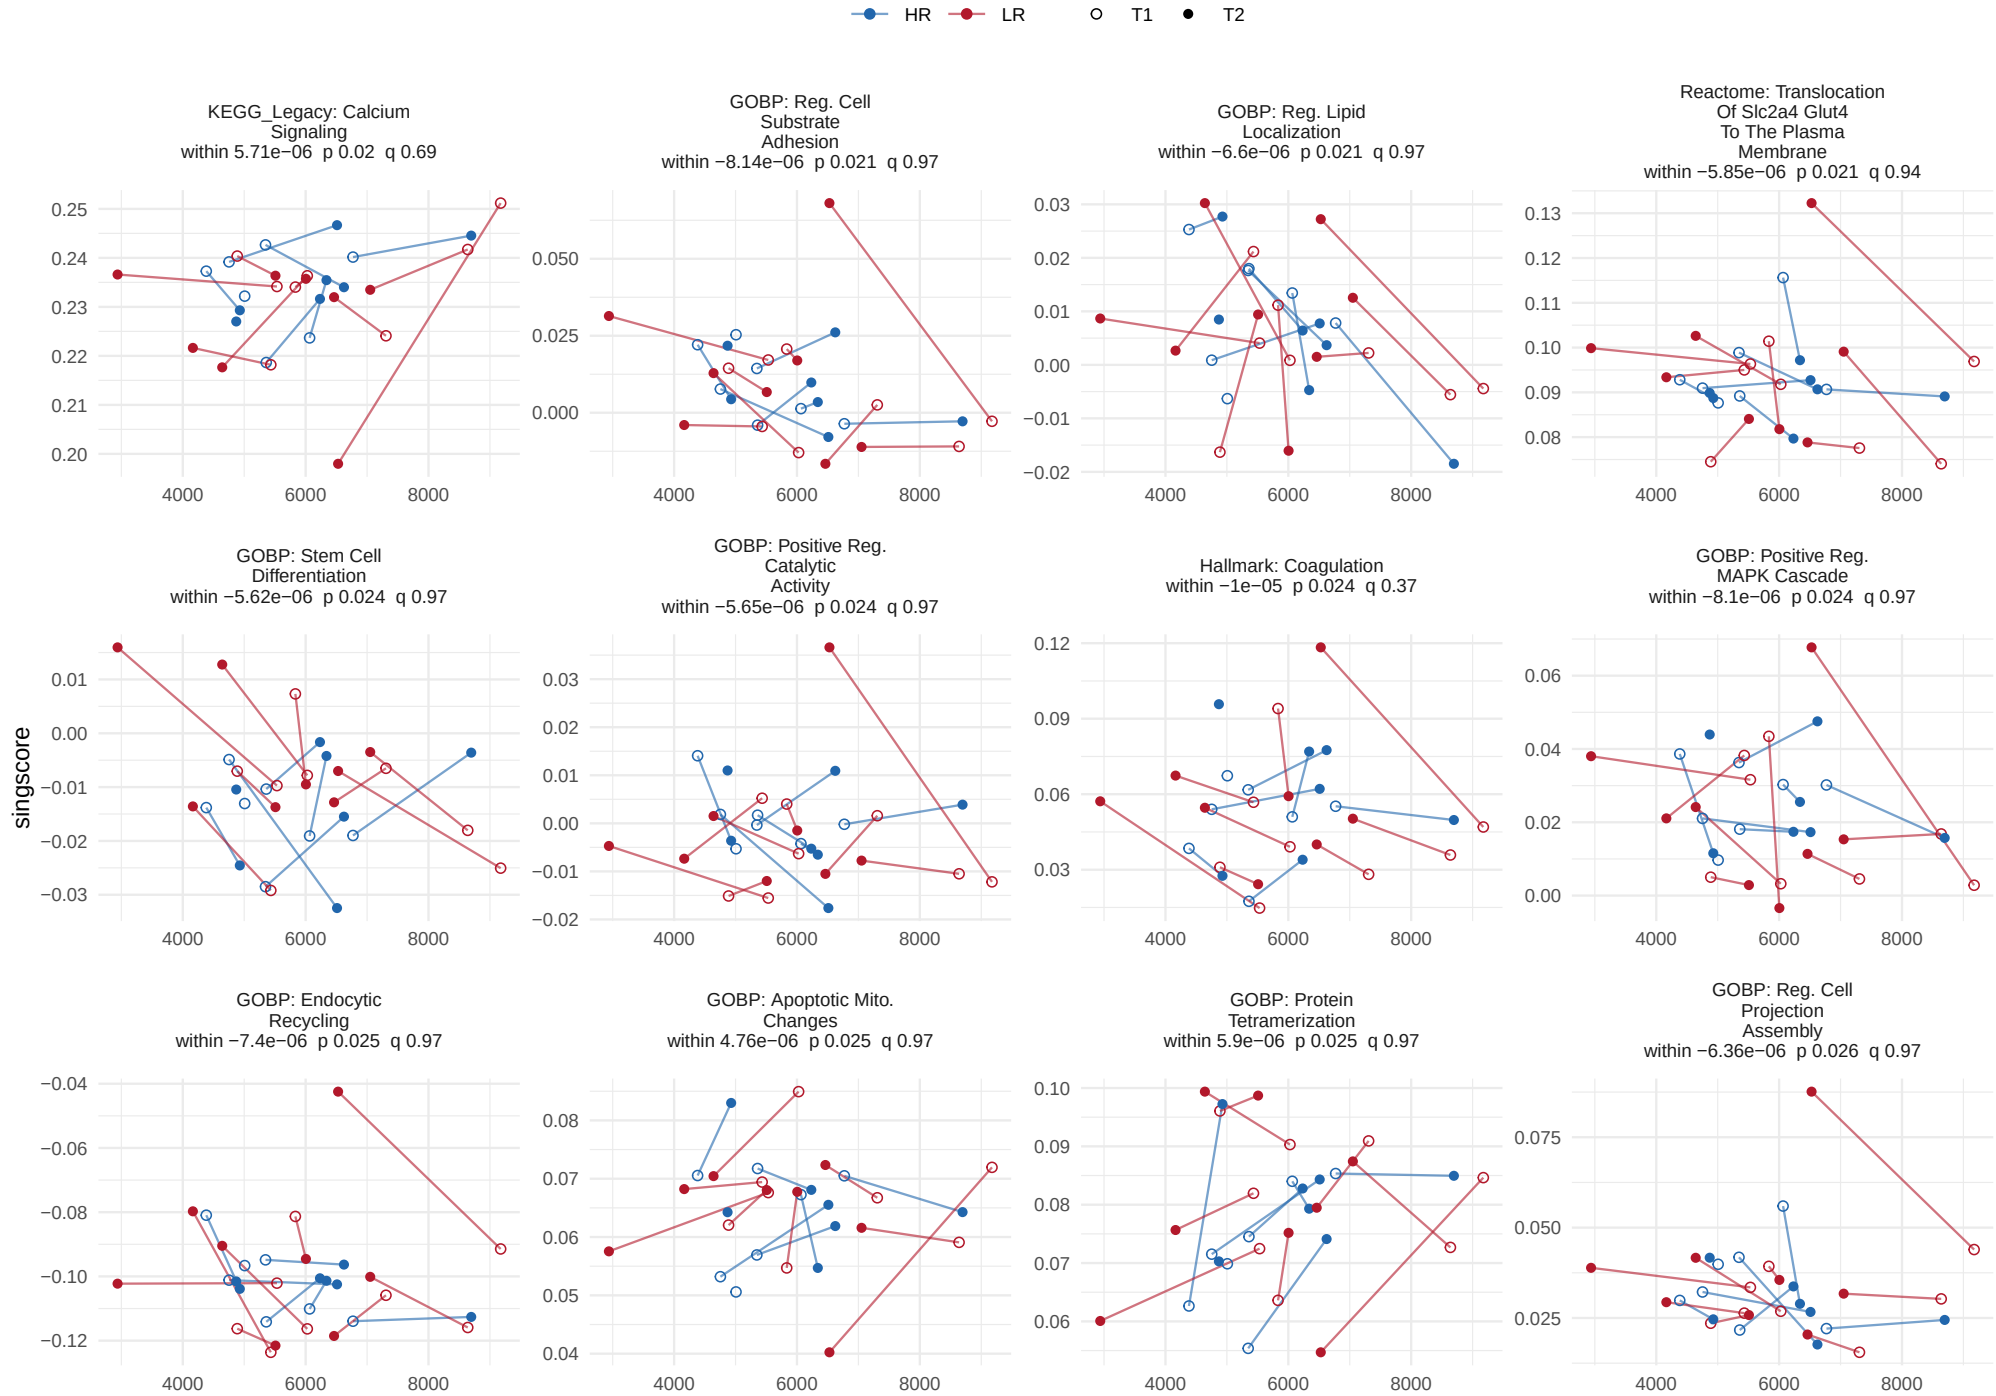

limma on 30 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

fcsa_type1, within−person term


46 of 1378 sets at p < 0.05, 0 at BH < 0.05.

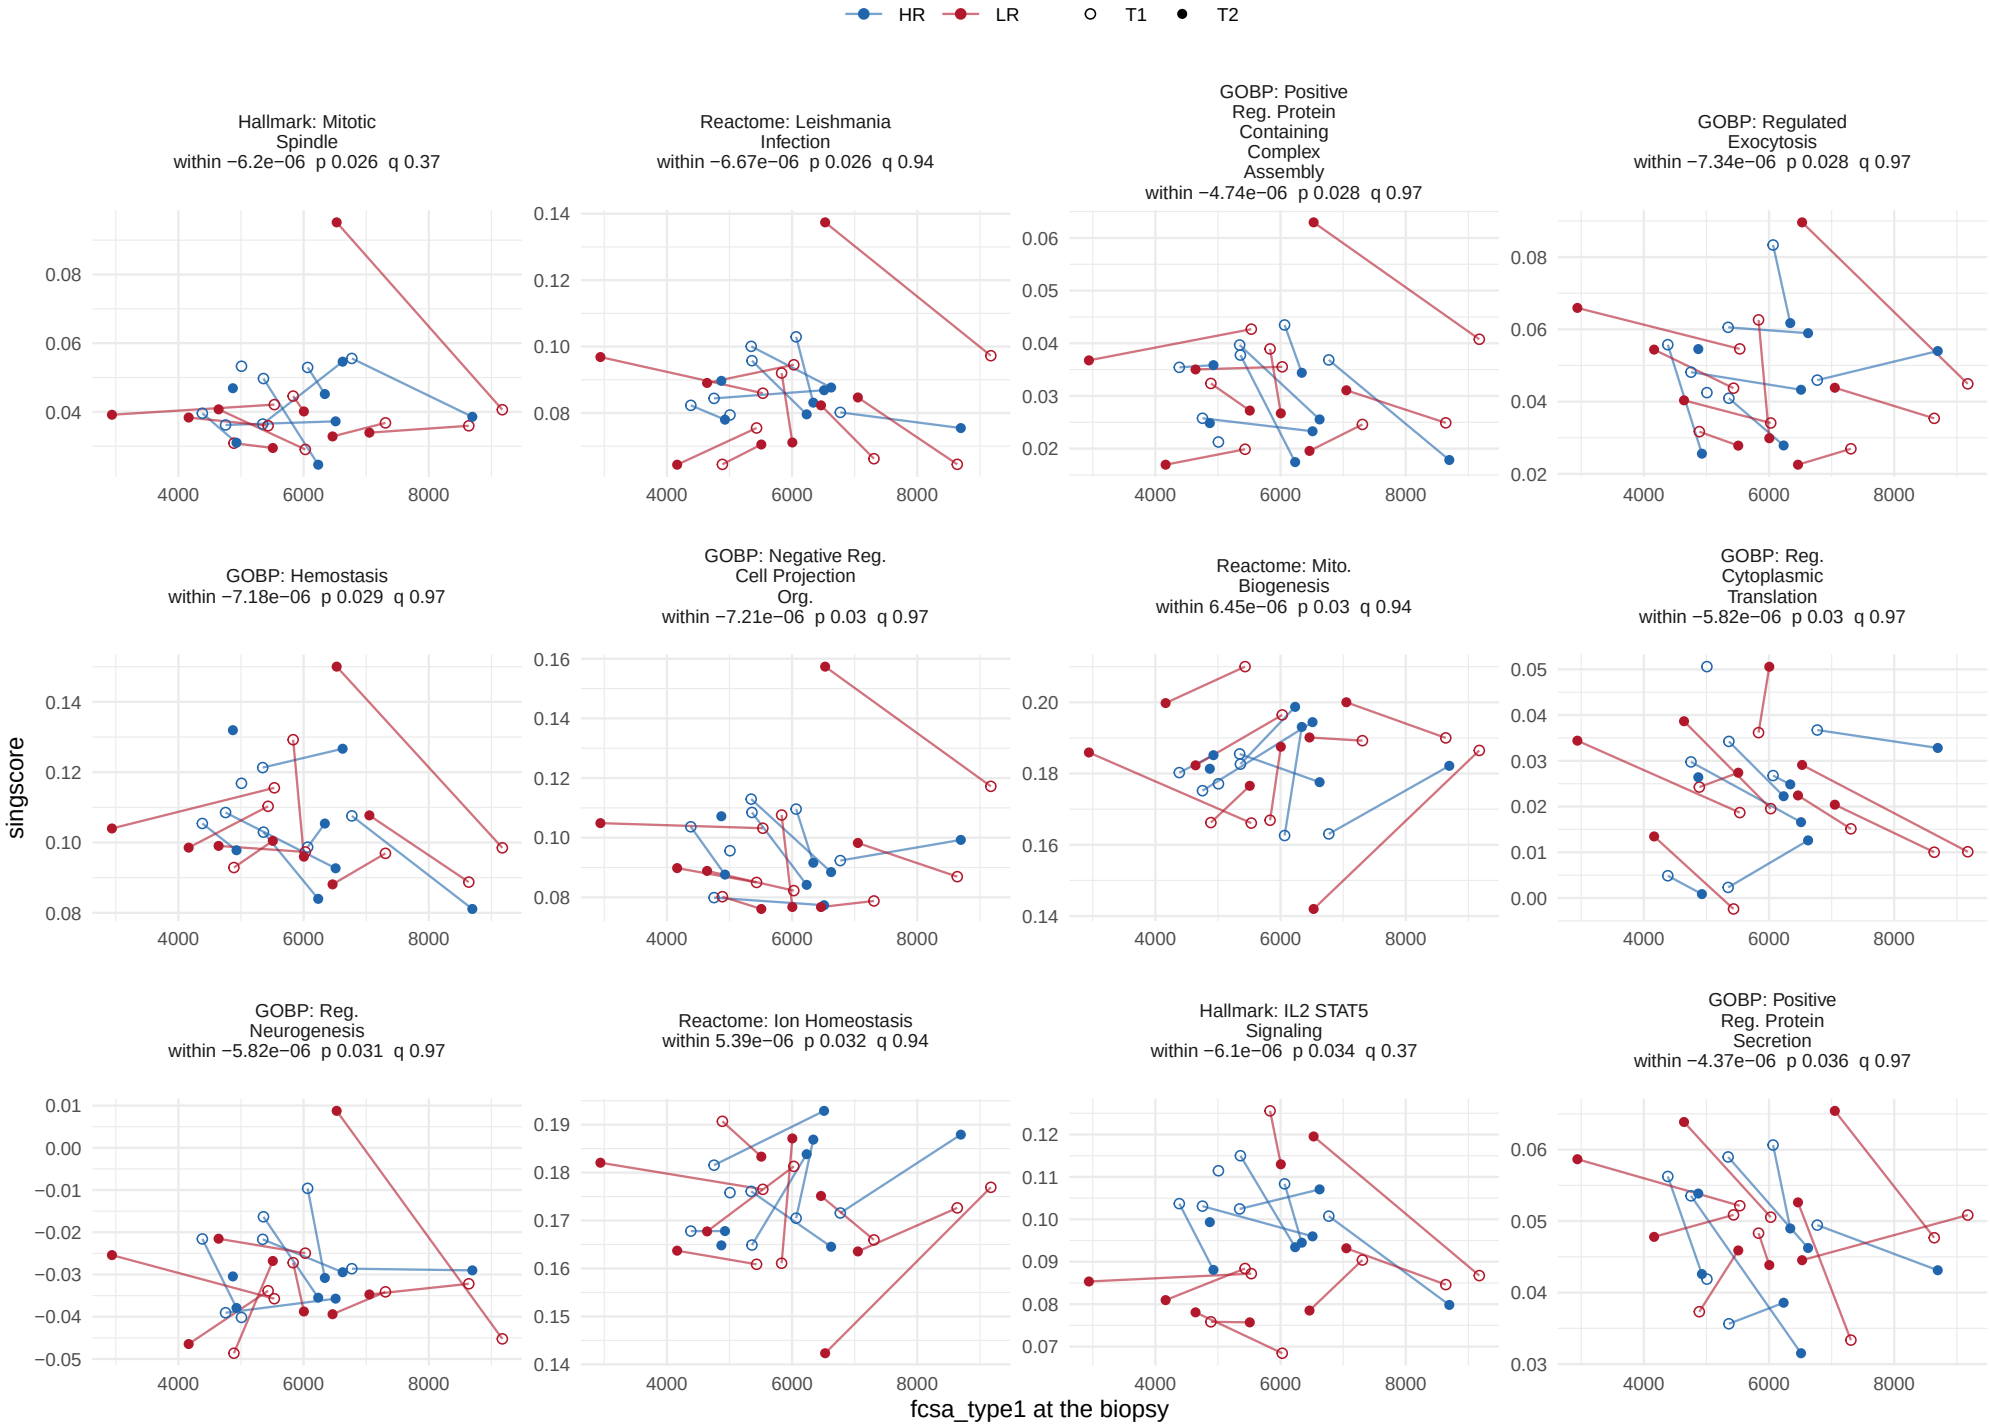

limma on 30 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

fcsa_type1, within−person term


46 of 1378 sets at p < 0.05, 0 at BH < 0.05.

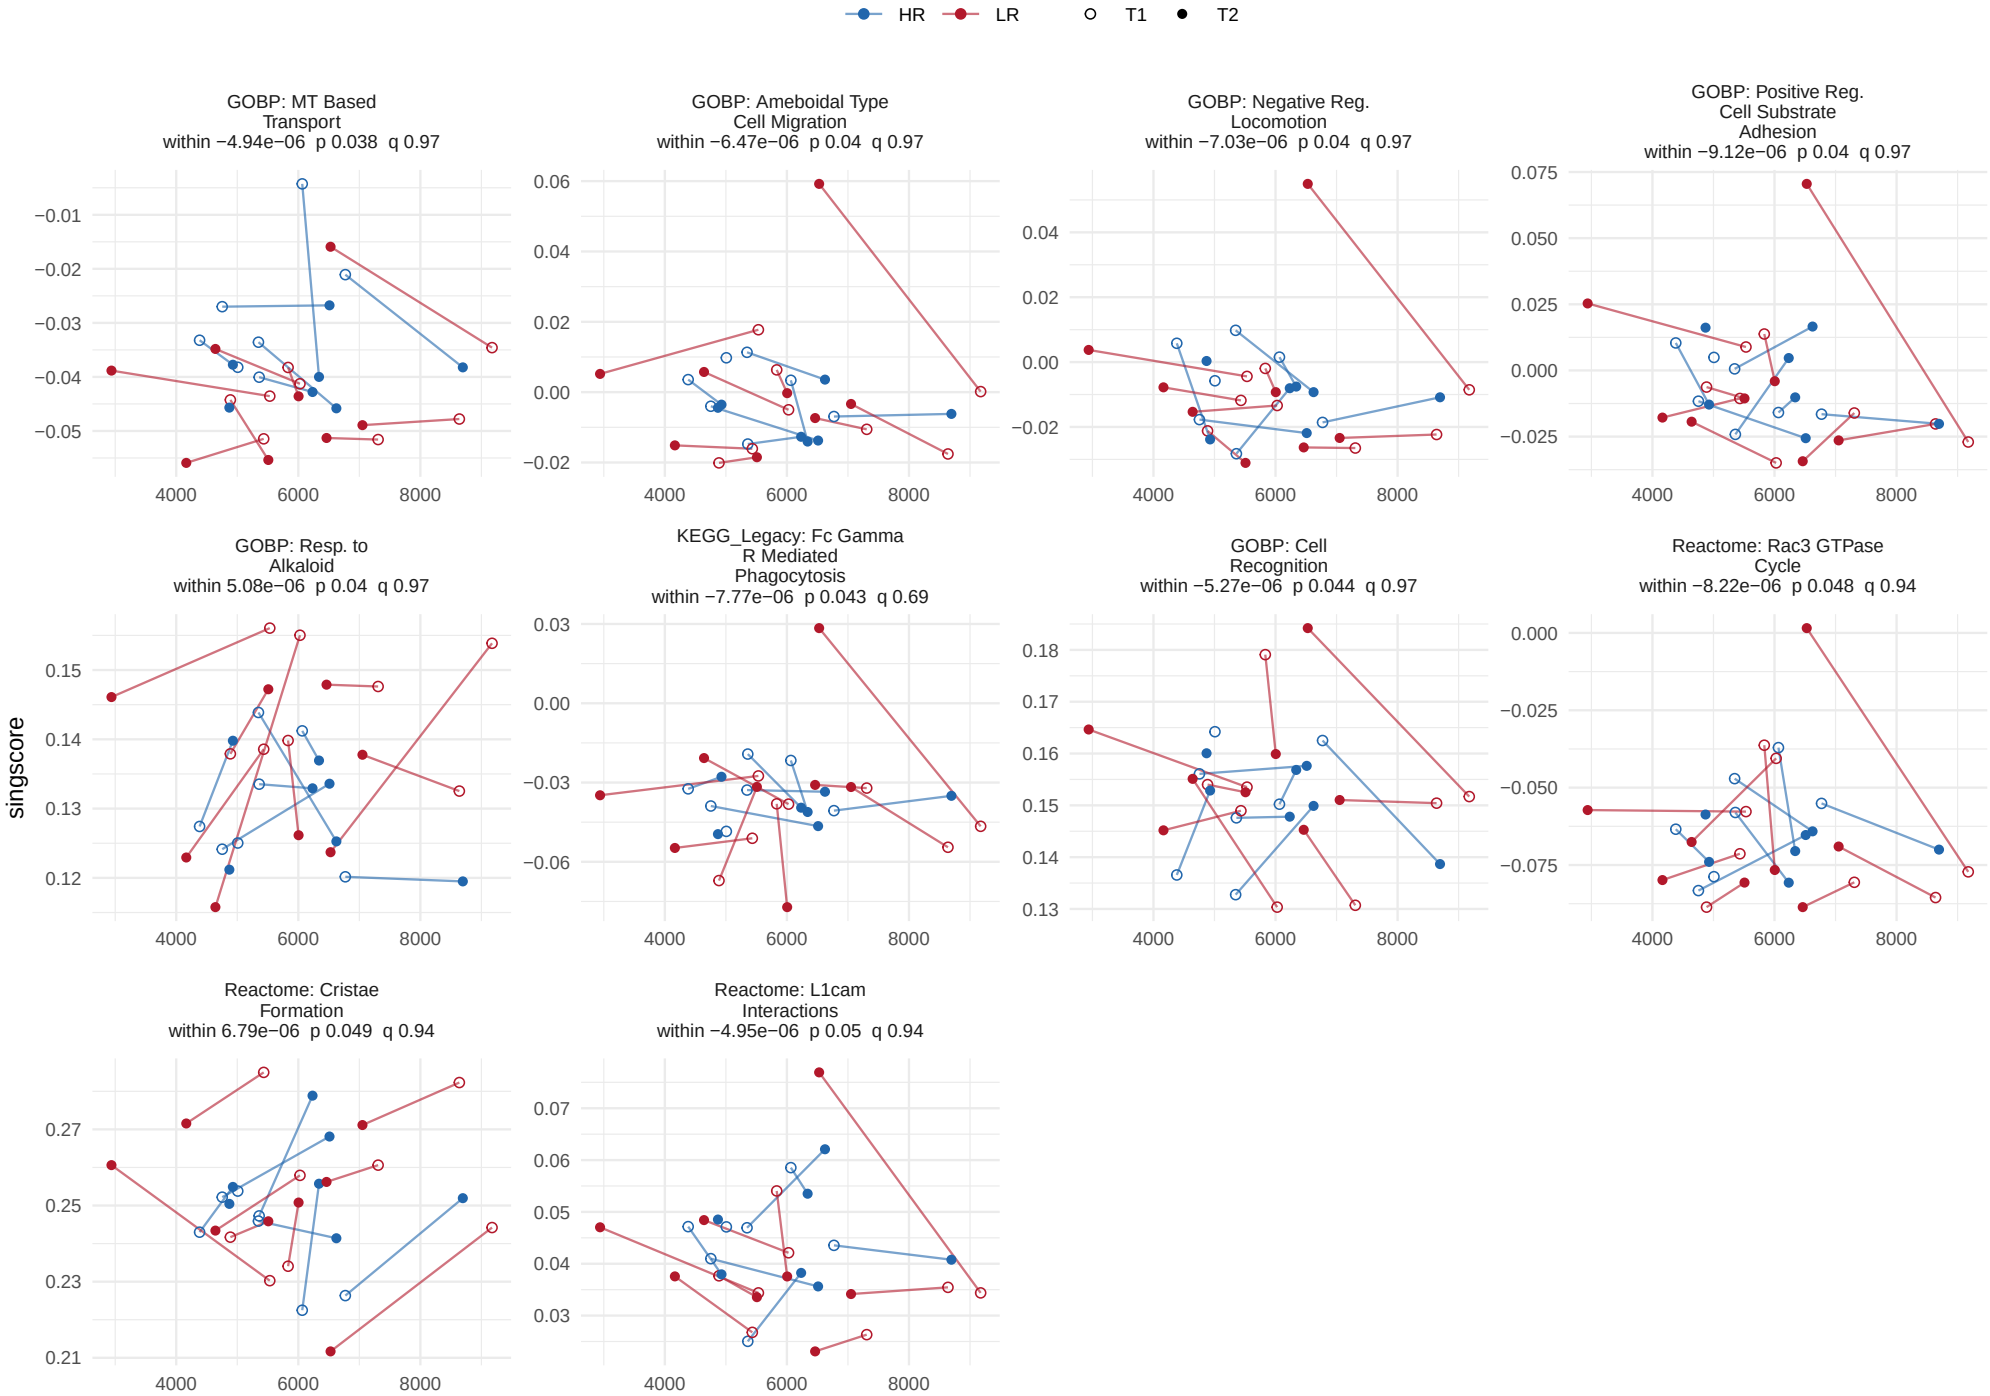

limma on 30 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

fcsa_type2, between−person term


75 of 1378 sets at p < 0.05, 0 at BH < 0.05.

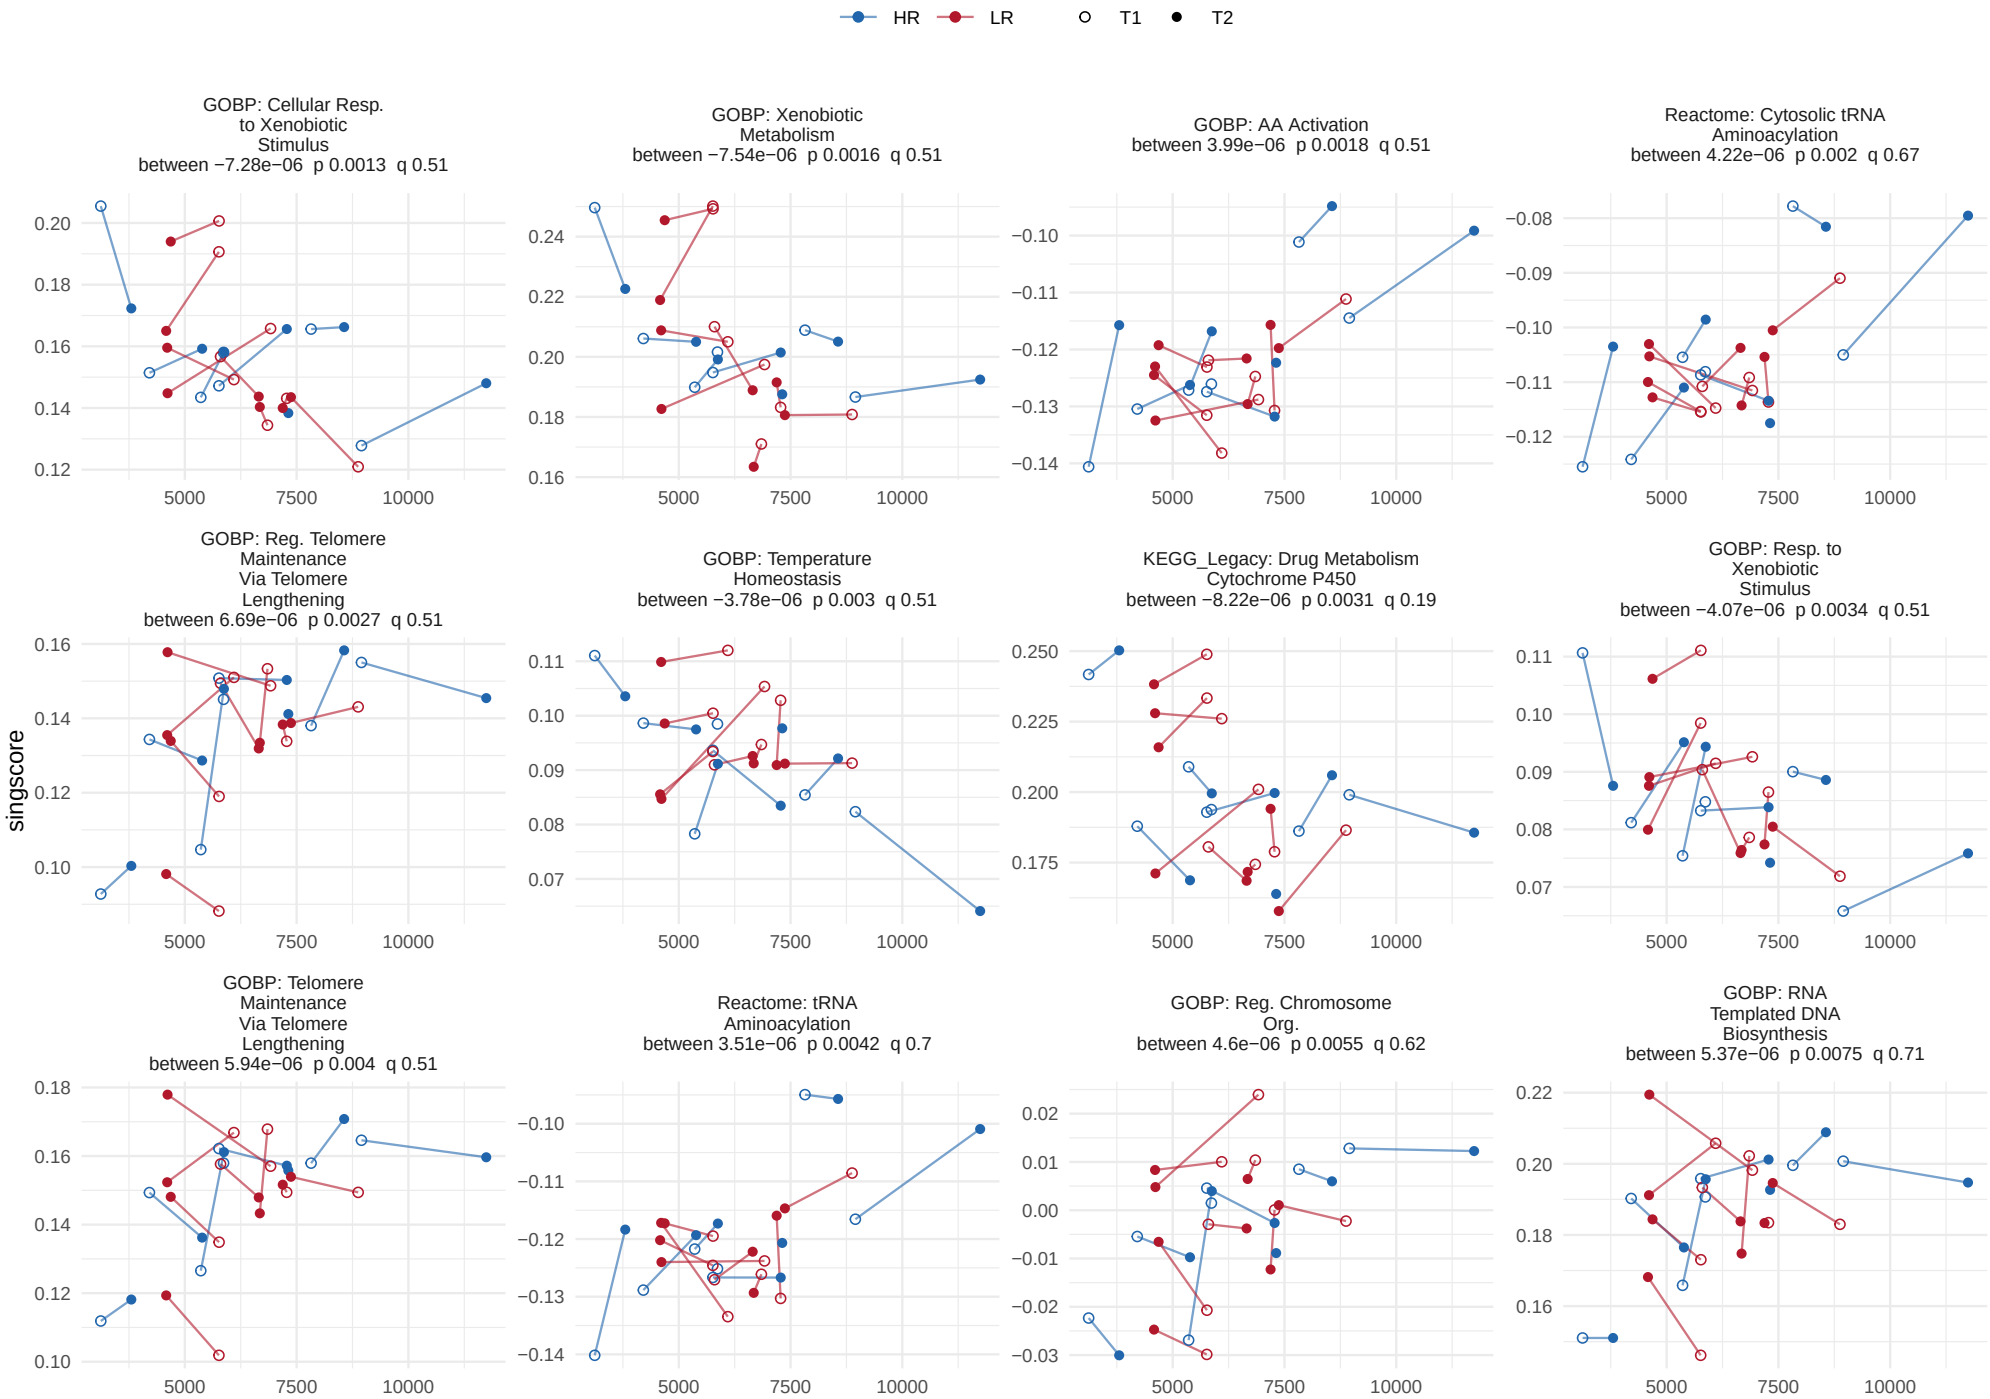

limma on 30 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

fcsa_type2, between−person term


75 of 1378 sets at p < 0.05, 0 at BH < 0.05.

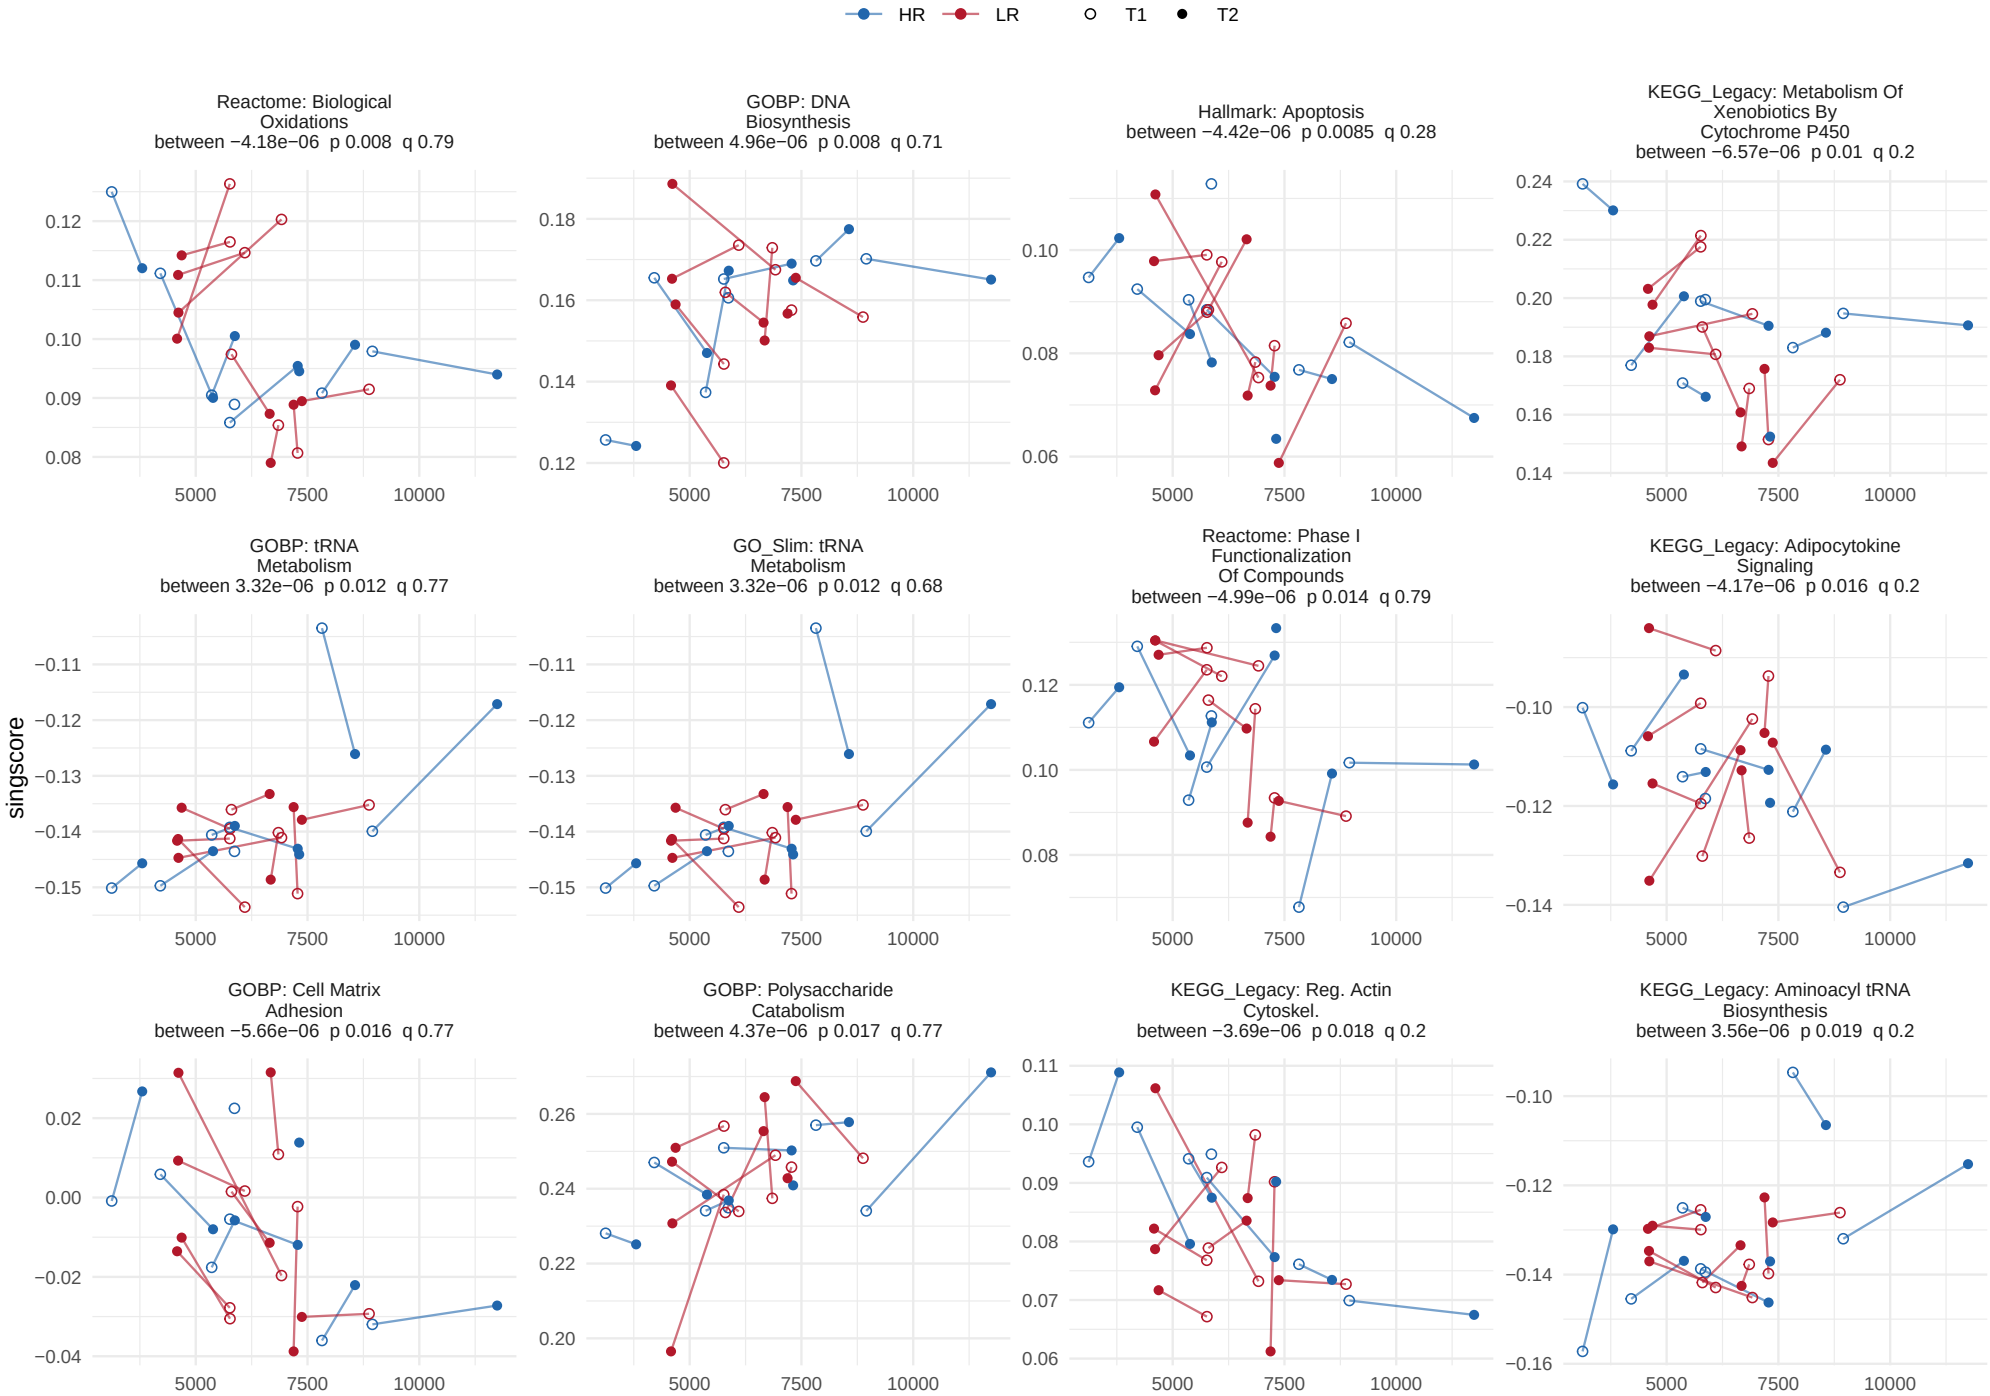

limma on 30 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

fcsa_type2, between−person term


75 of 1378 sets at p < 0.05, 0 at BH < 0.05.

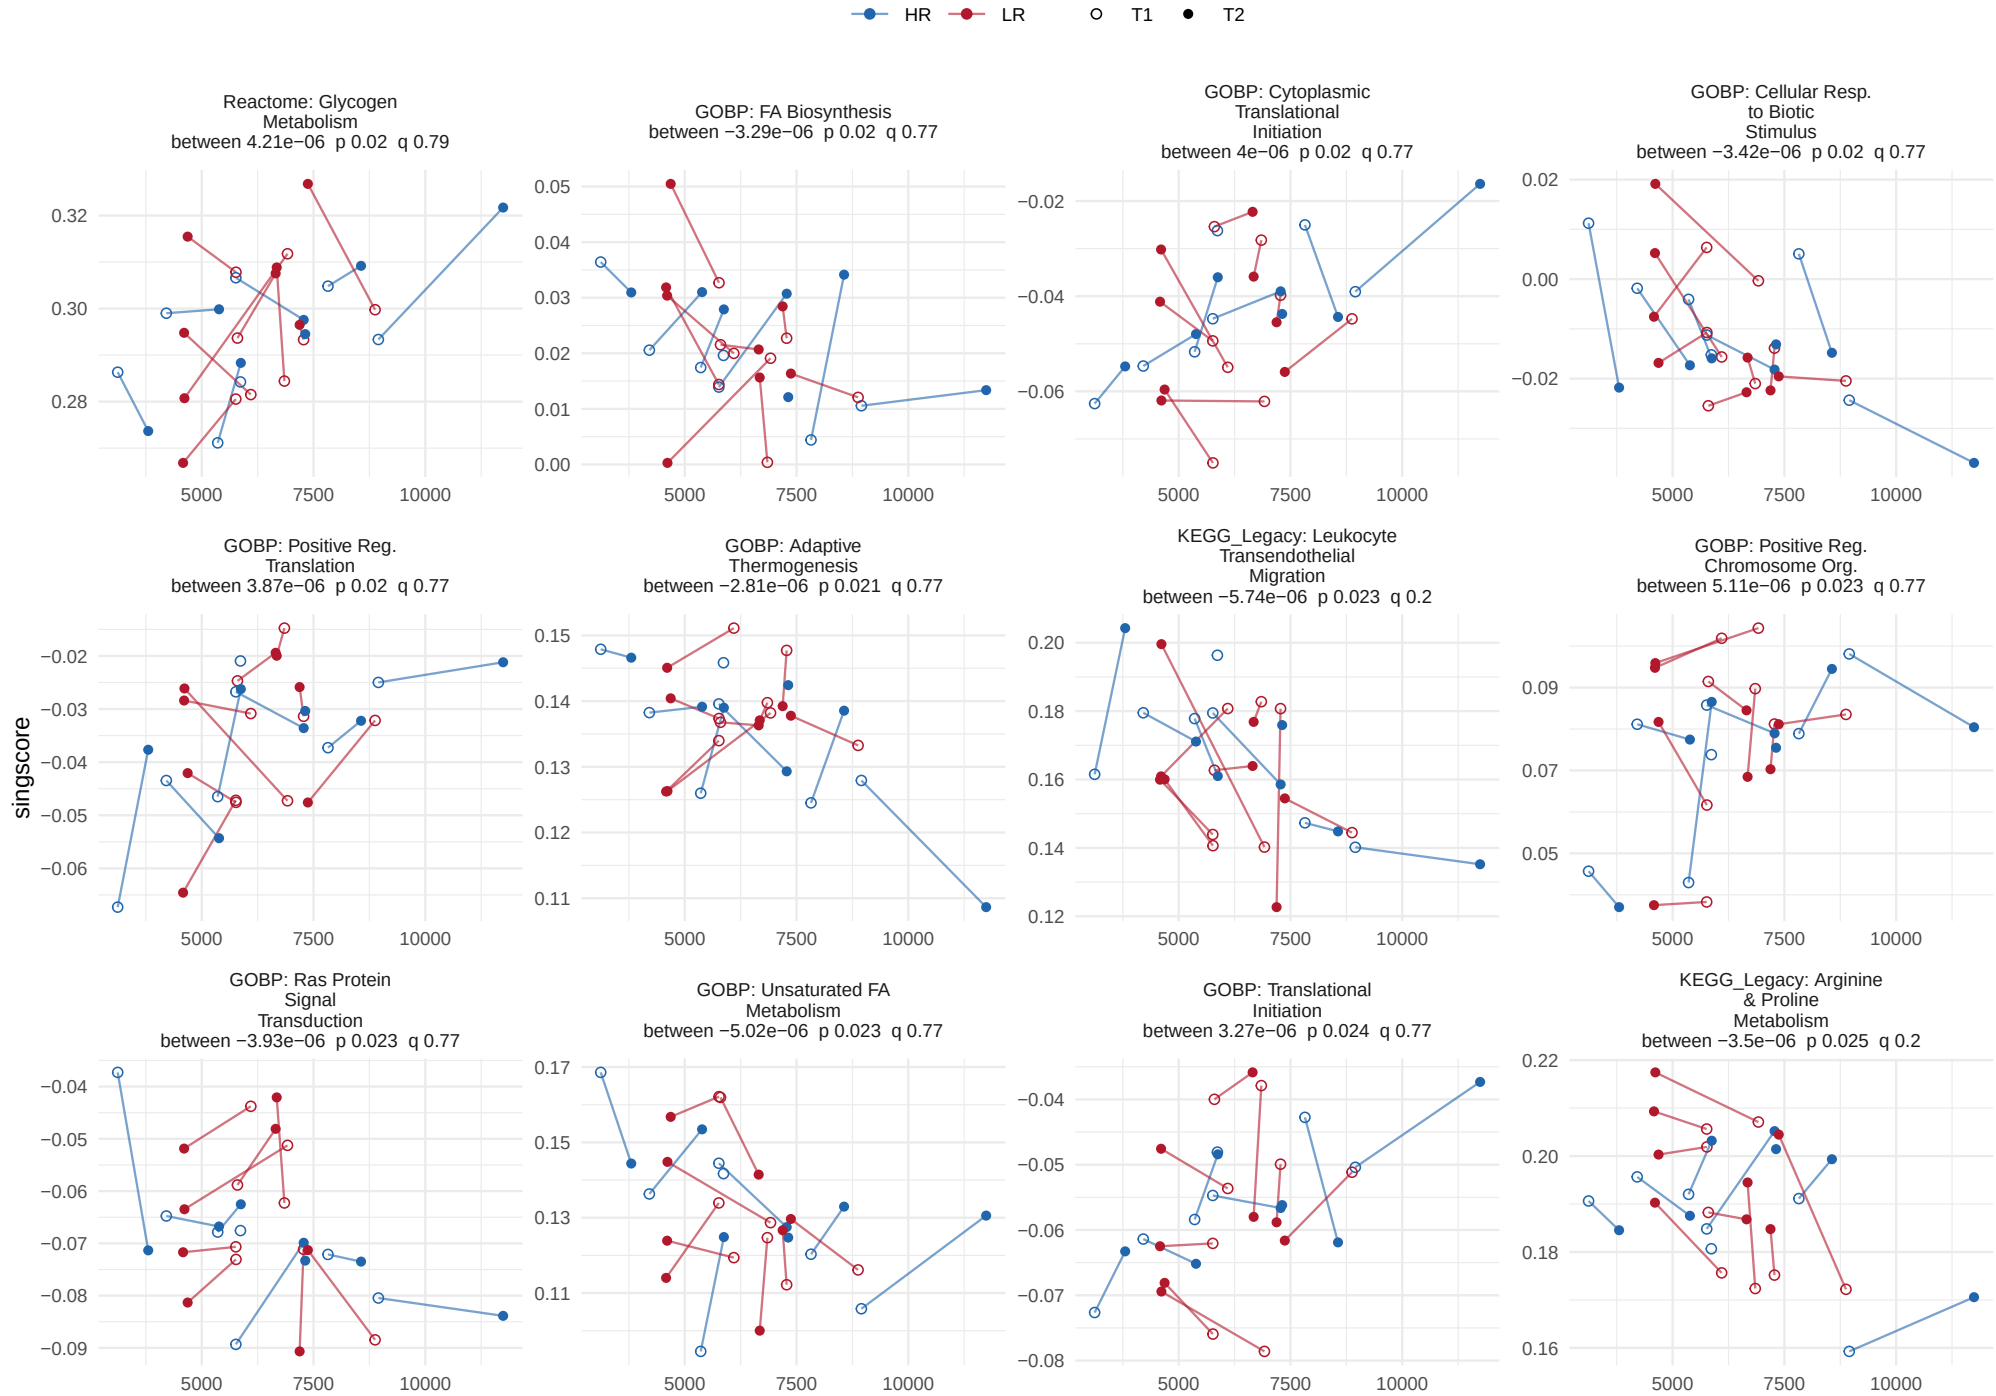

limma on 30 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

fcsa_type2, between−person term


75 of 1378 sets at p < 0.05, 0 at BH < 0.05.

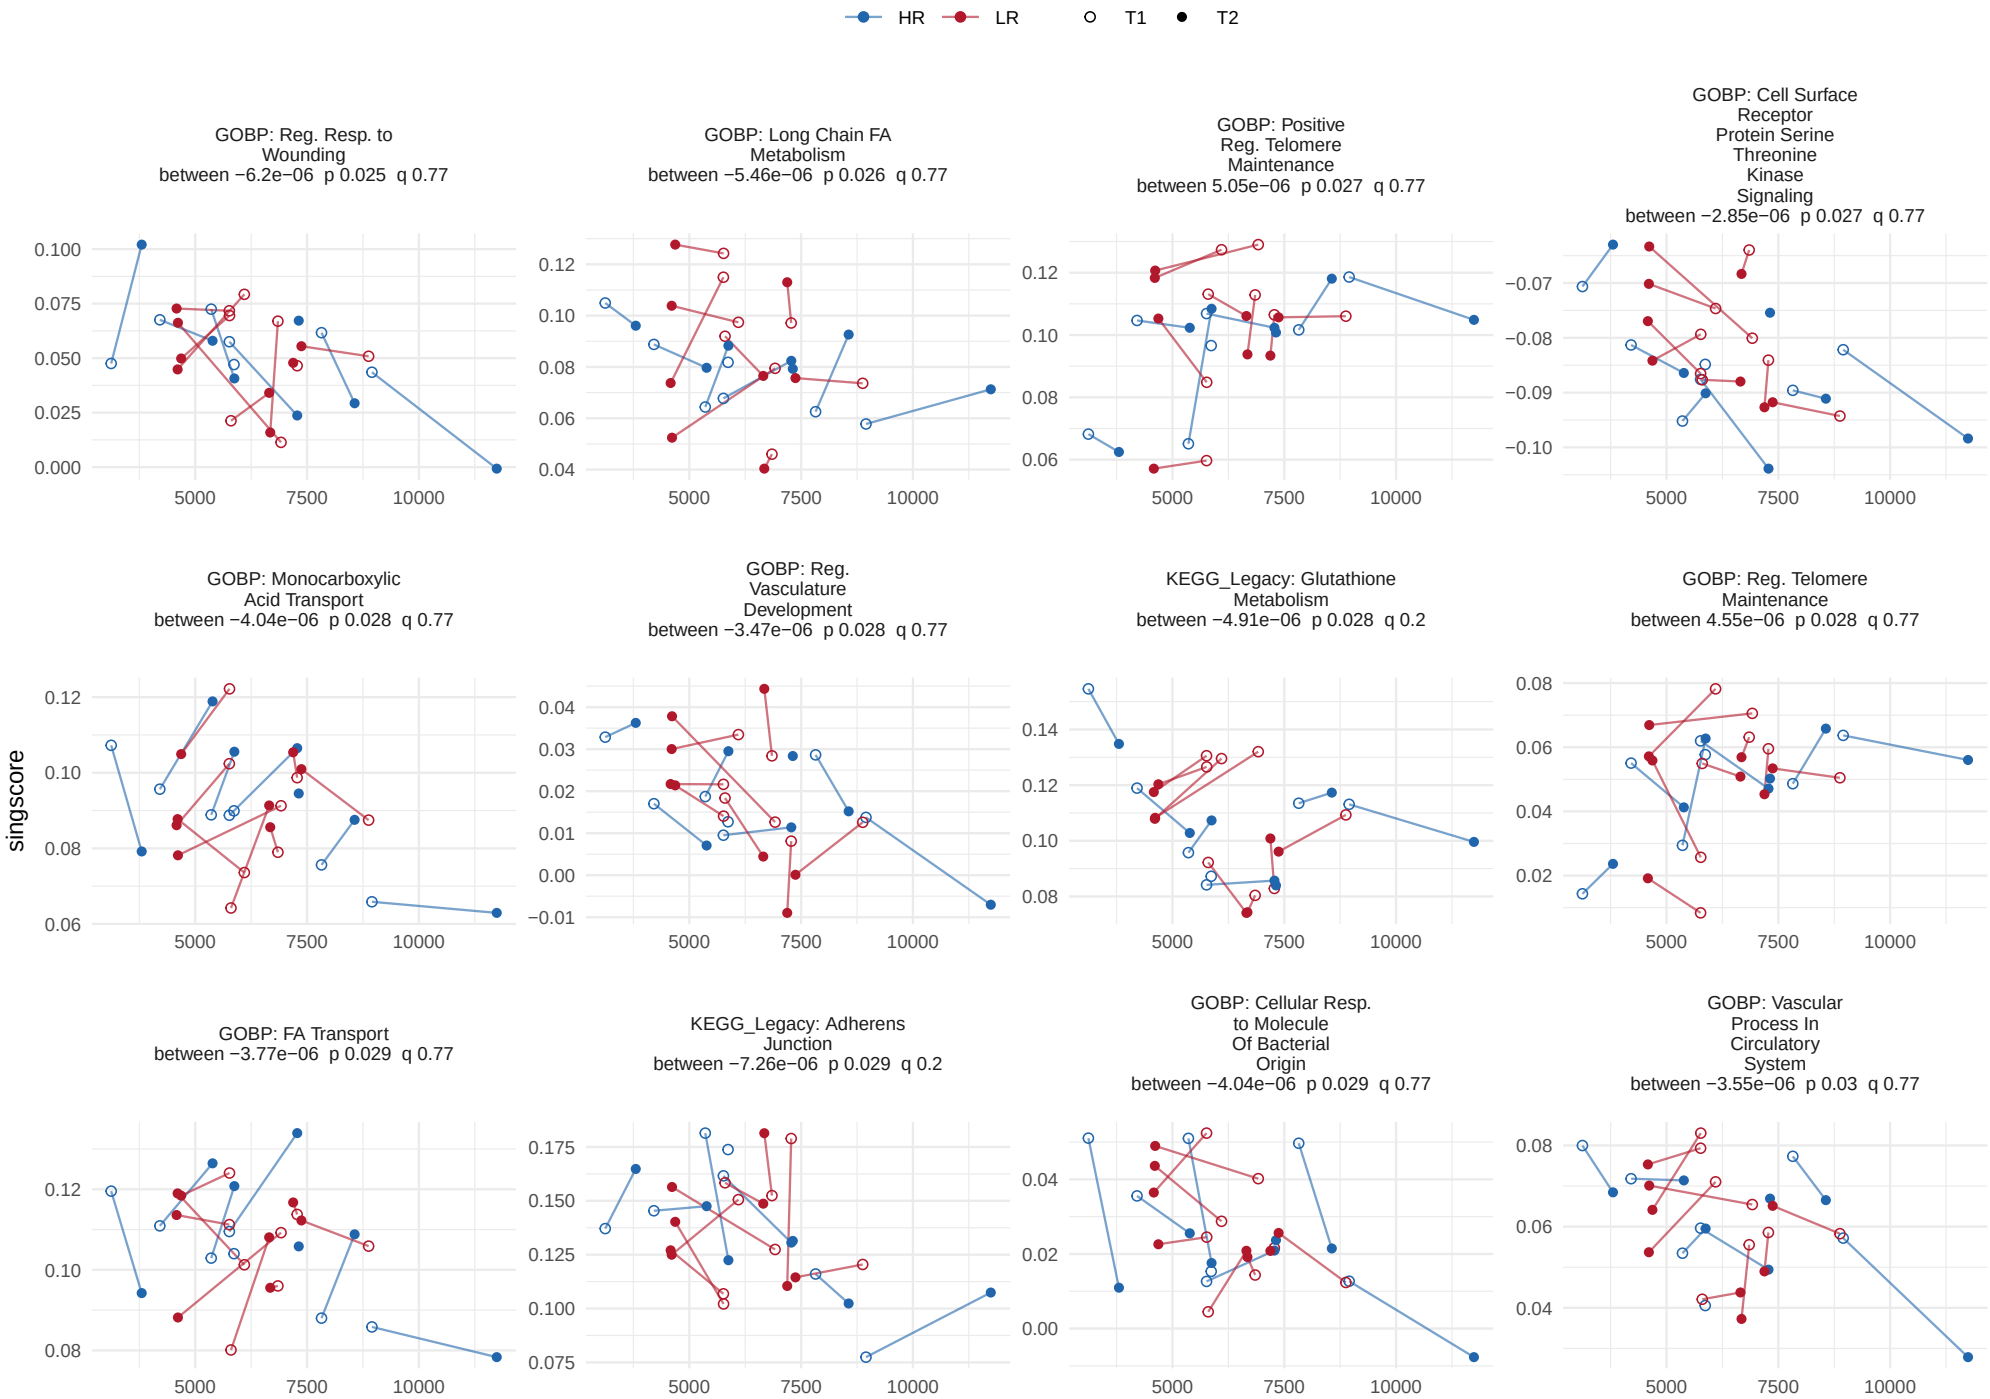

limma on 30 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

fcsa_type2, between−person term


75 of 1378 sets at p < 0.05, 0 at BH < 0.05.

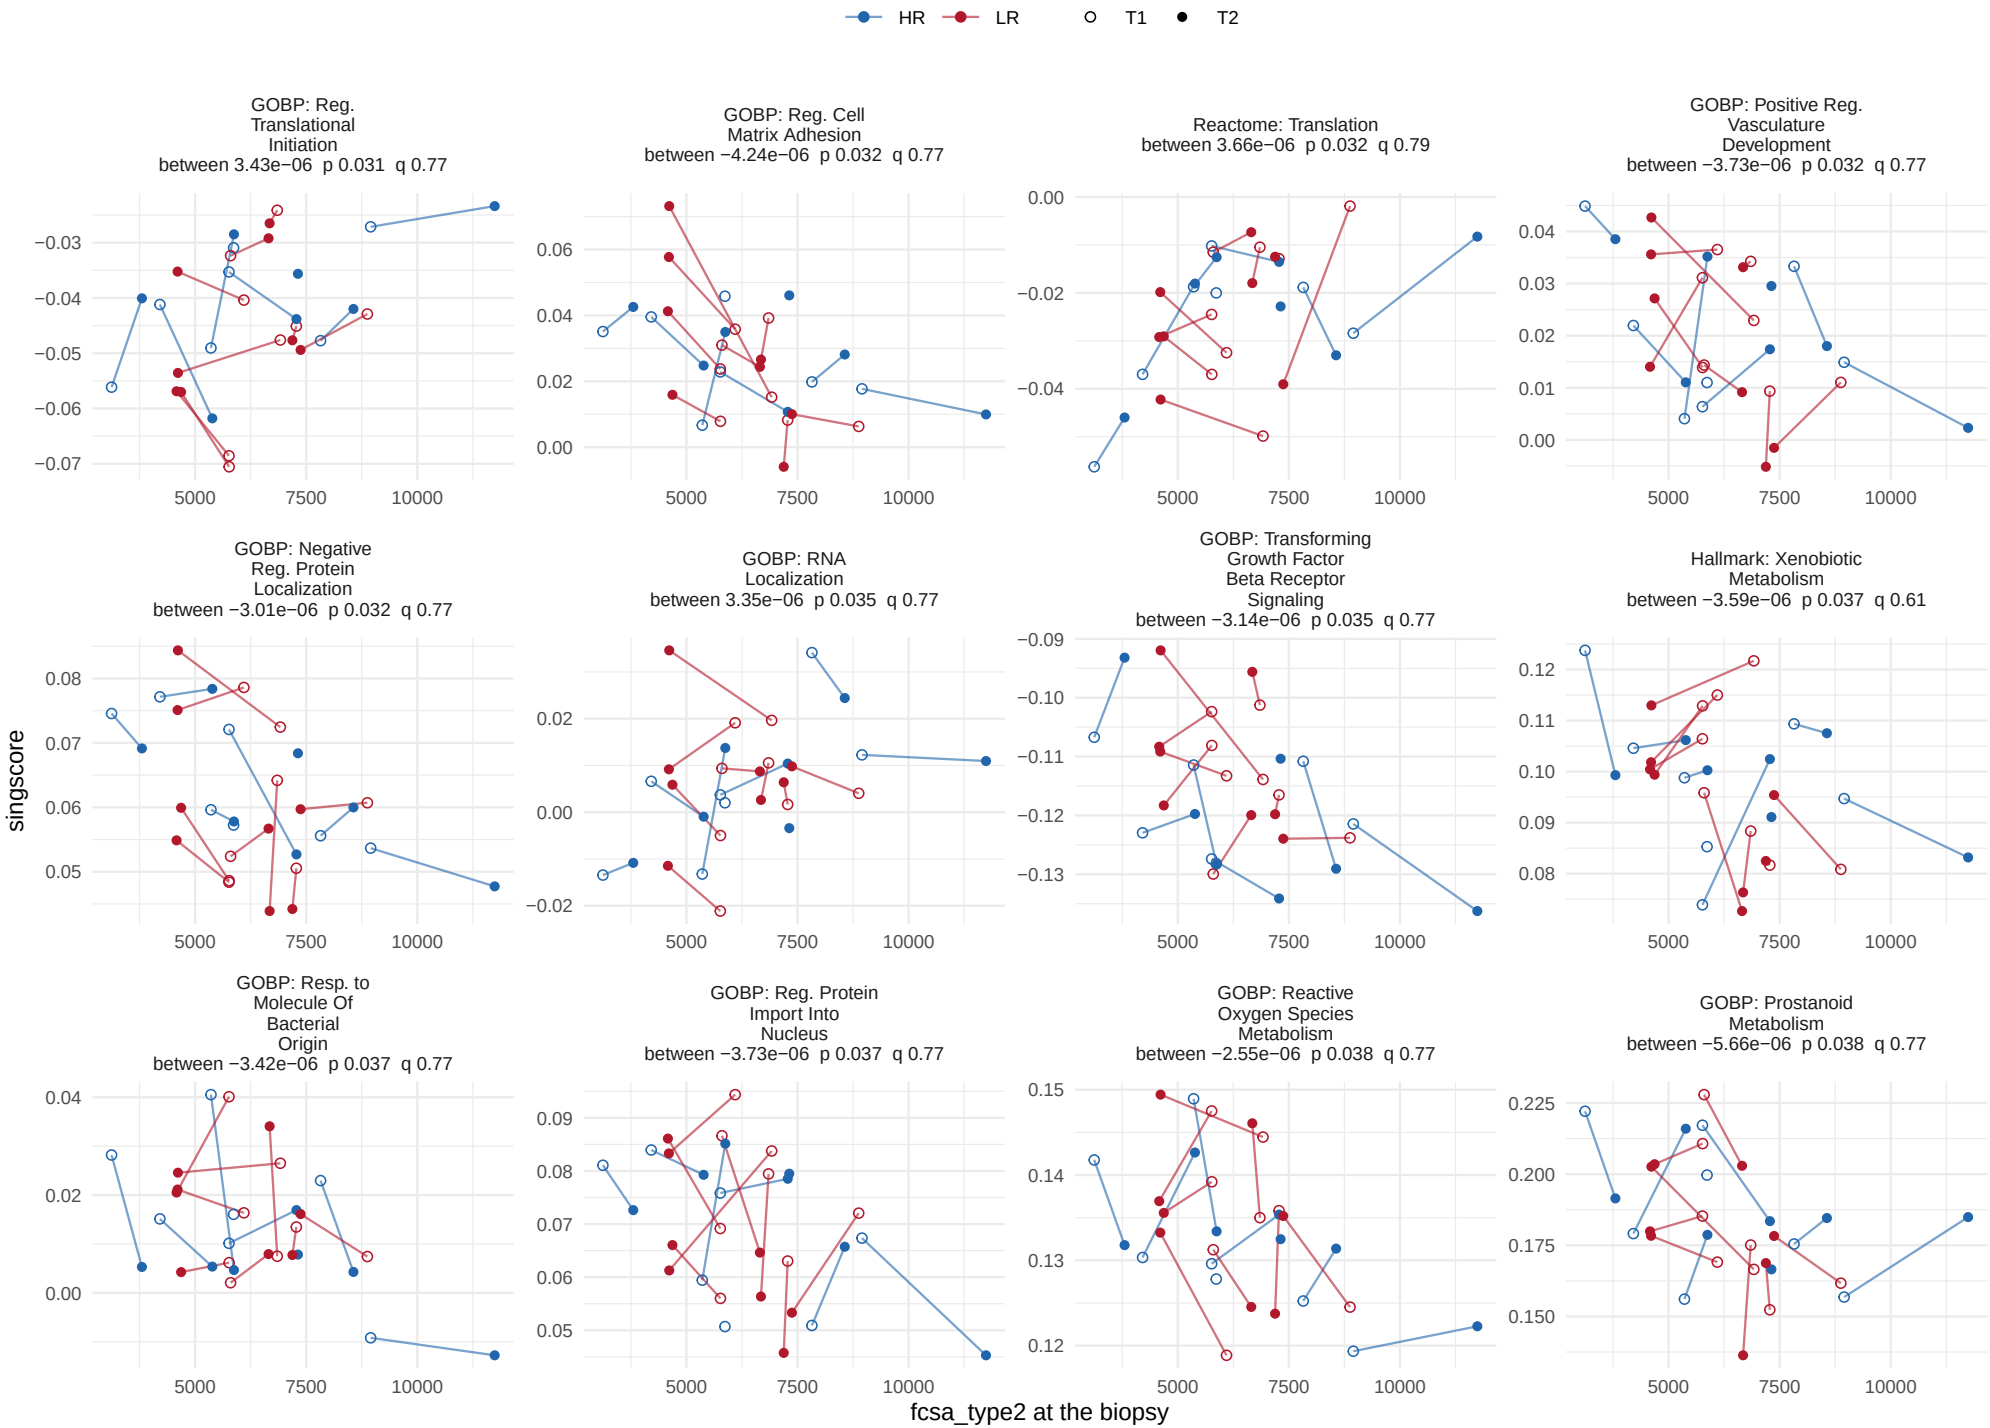

limma on 30 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

fcsa_type2, between−person term


75 of 1378 sets at p < 0.05, 0 at BH < 0.05.

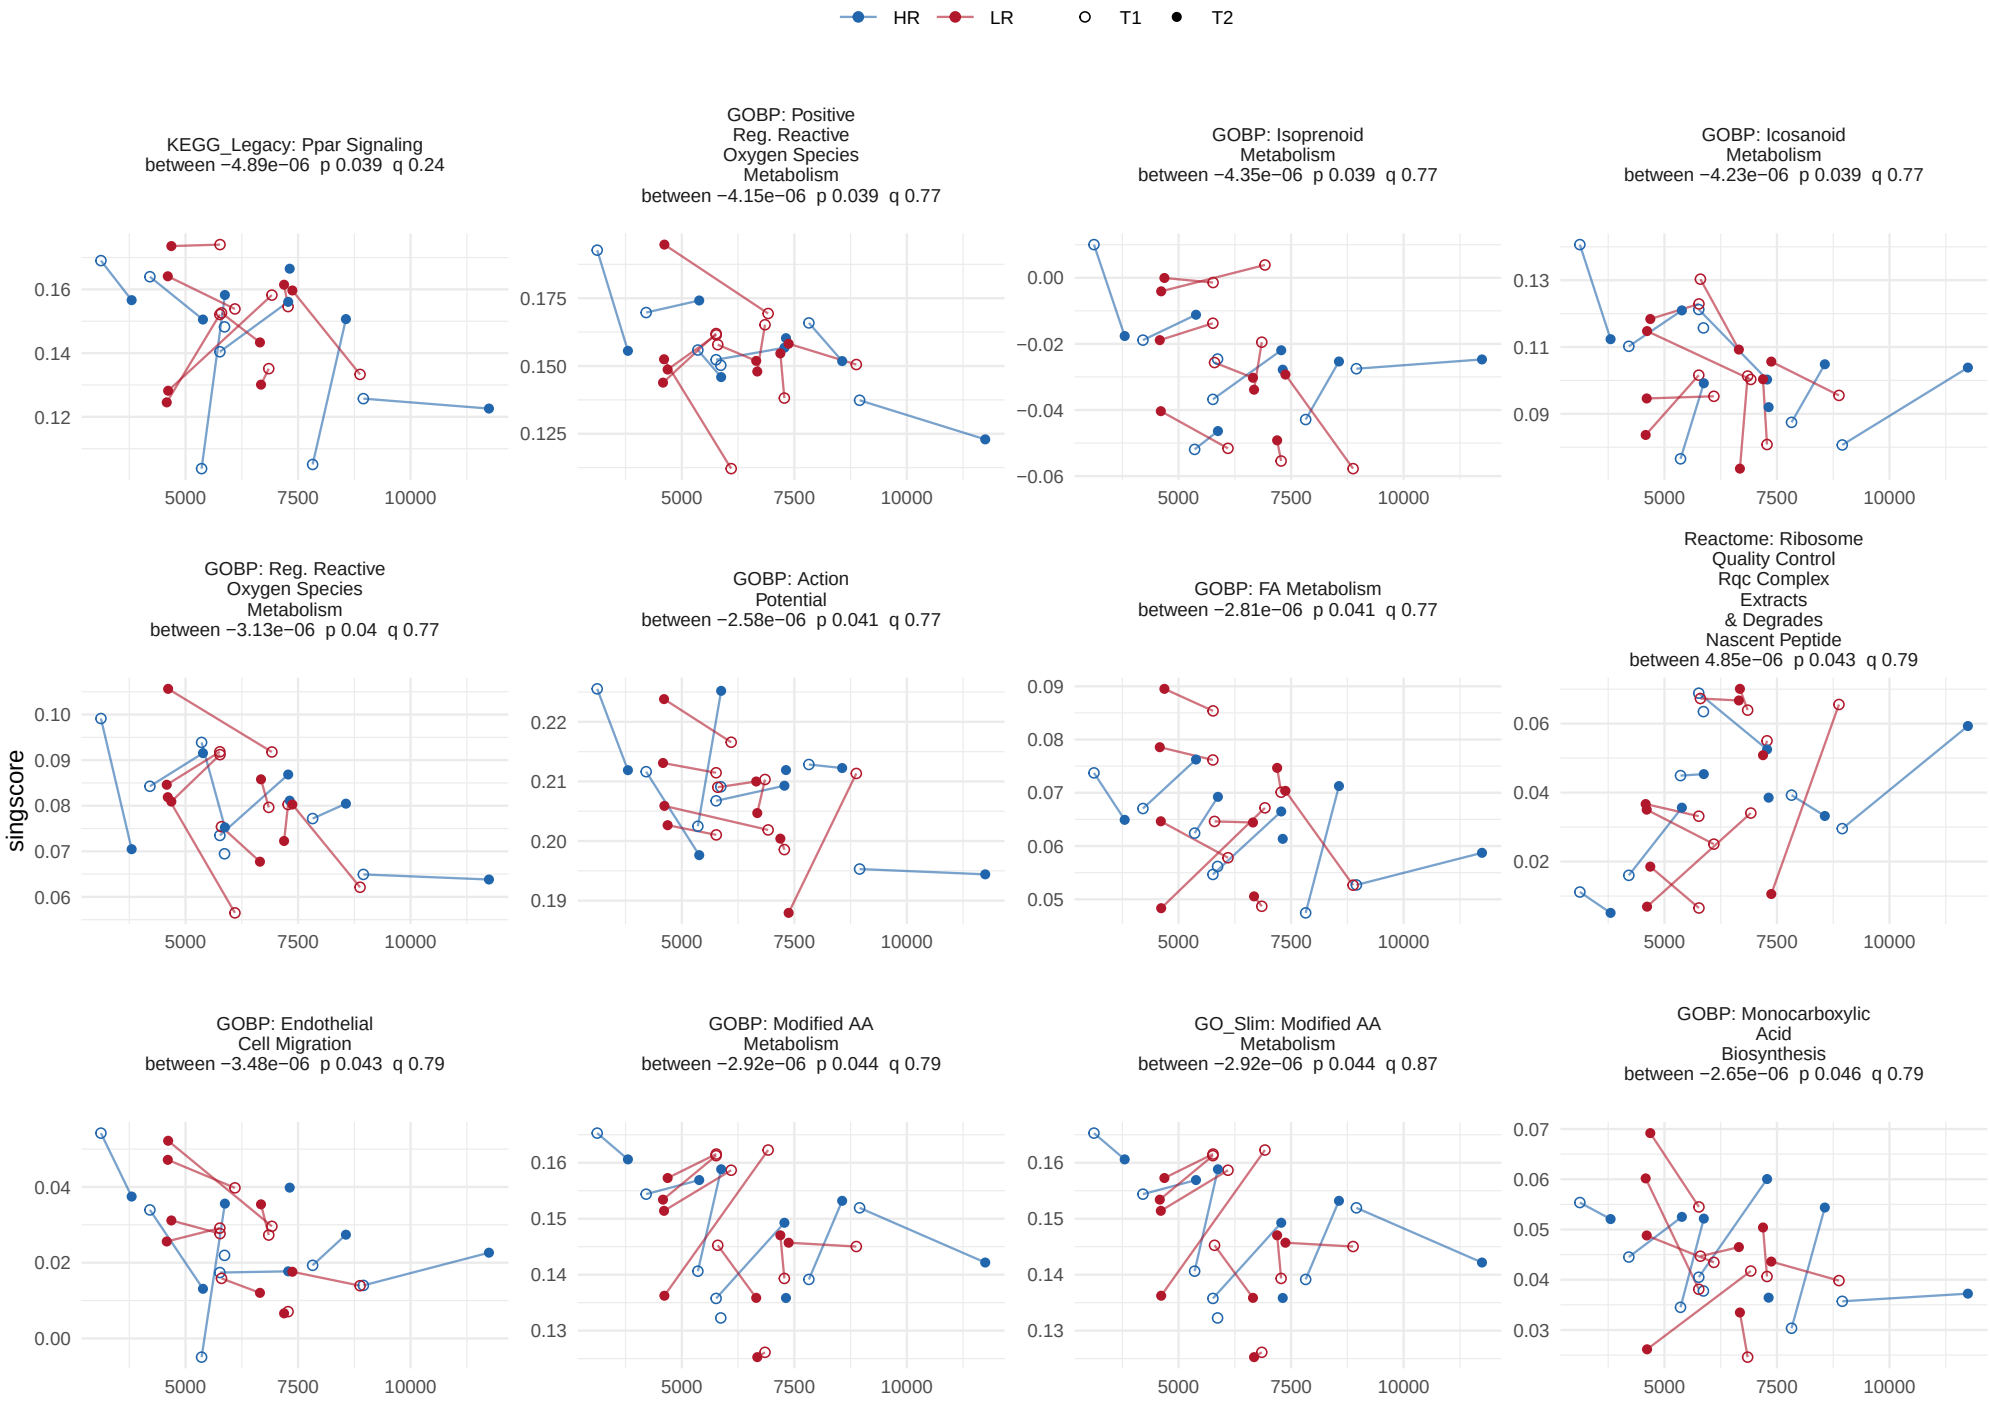

limma on 30 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

fcsa_type2, between−person term


75 of 1378 sets at p < 0.05, 0 at BH < 0.05.

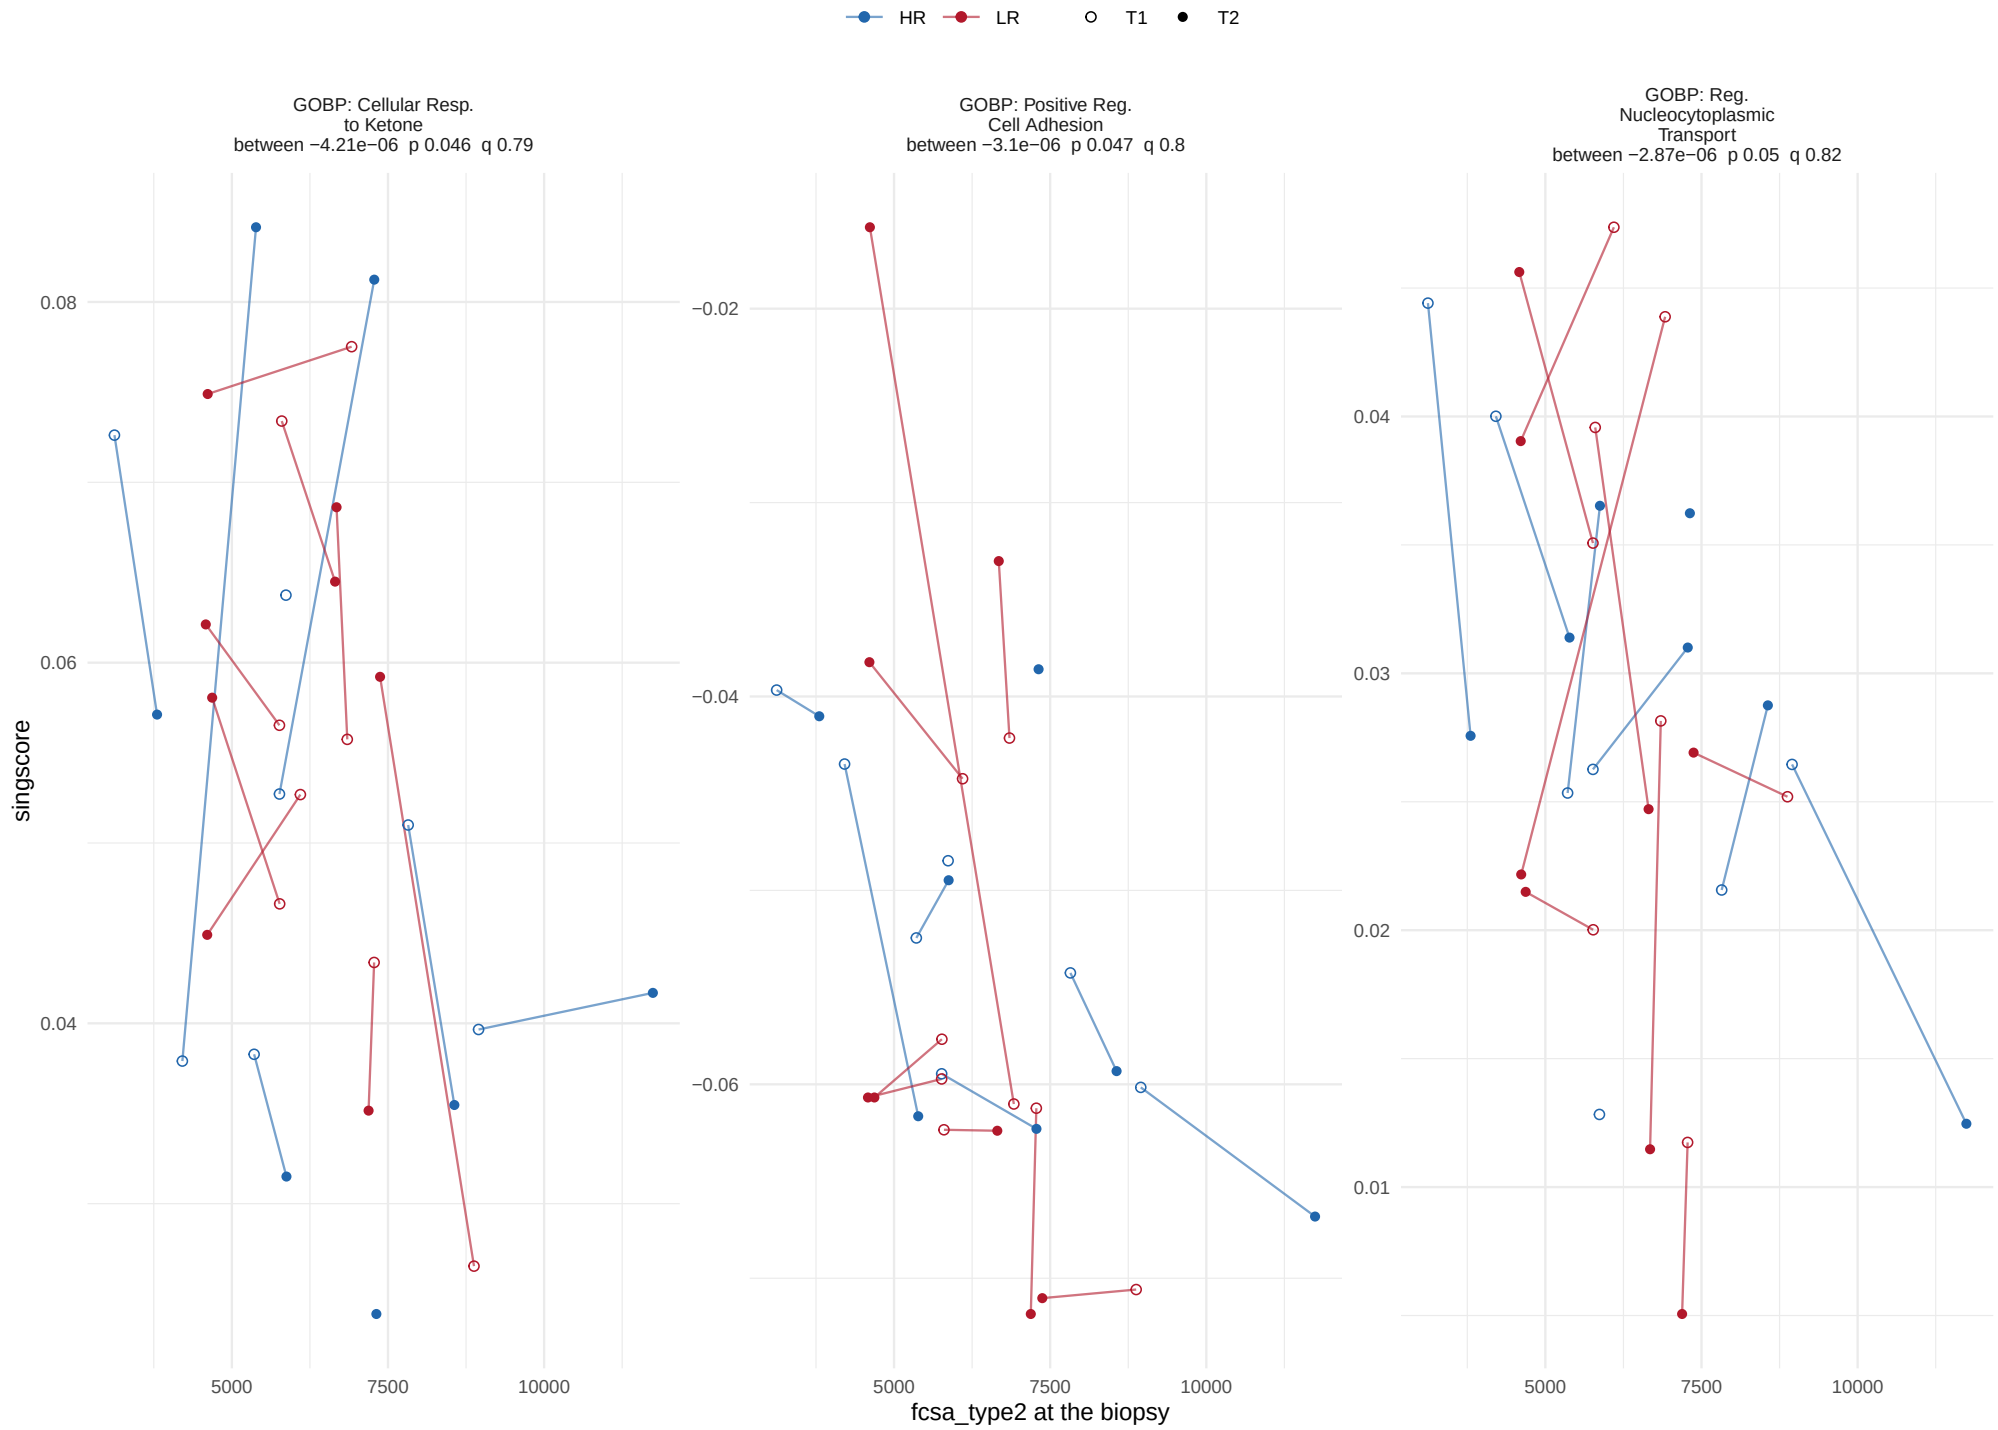

limma on 30 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

fcsa_type2, within−person term


72 of 1378 sets at p < 0.05, 0 at BH < 0.05.

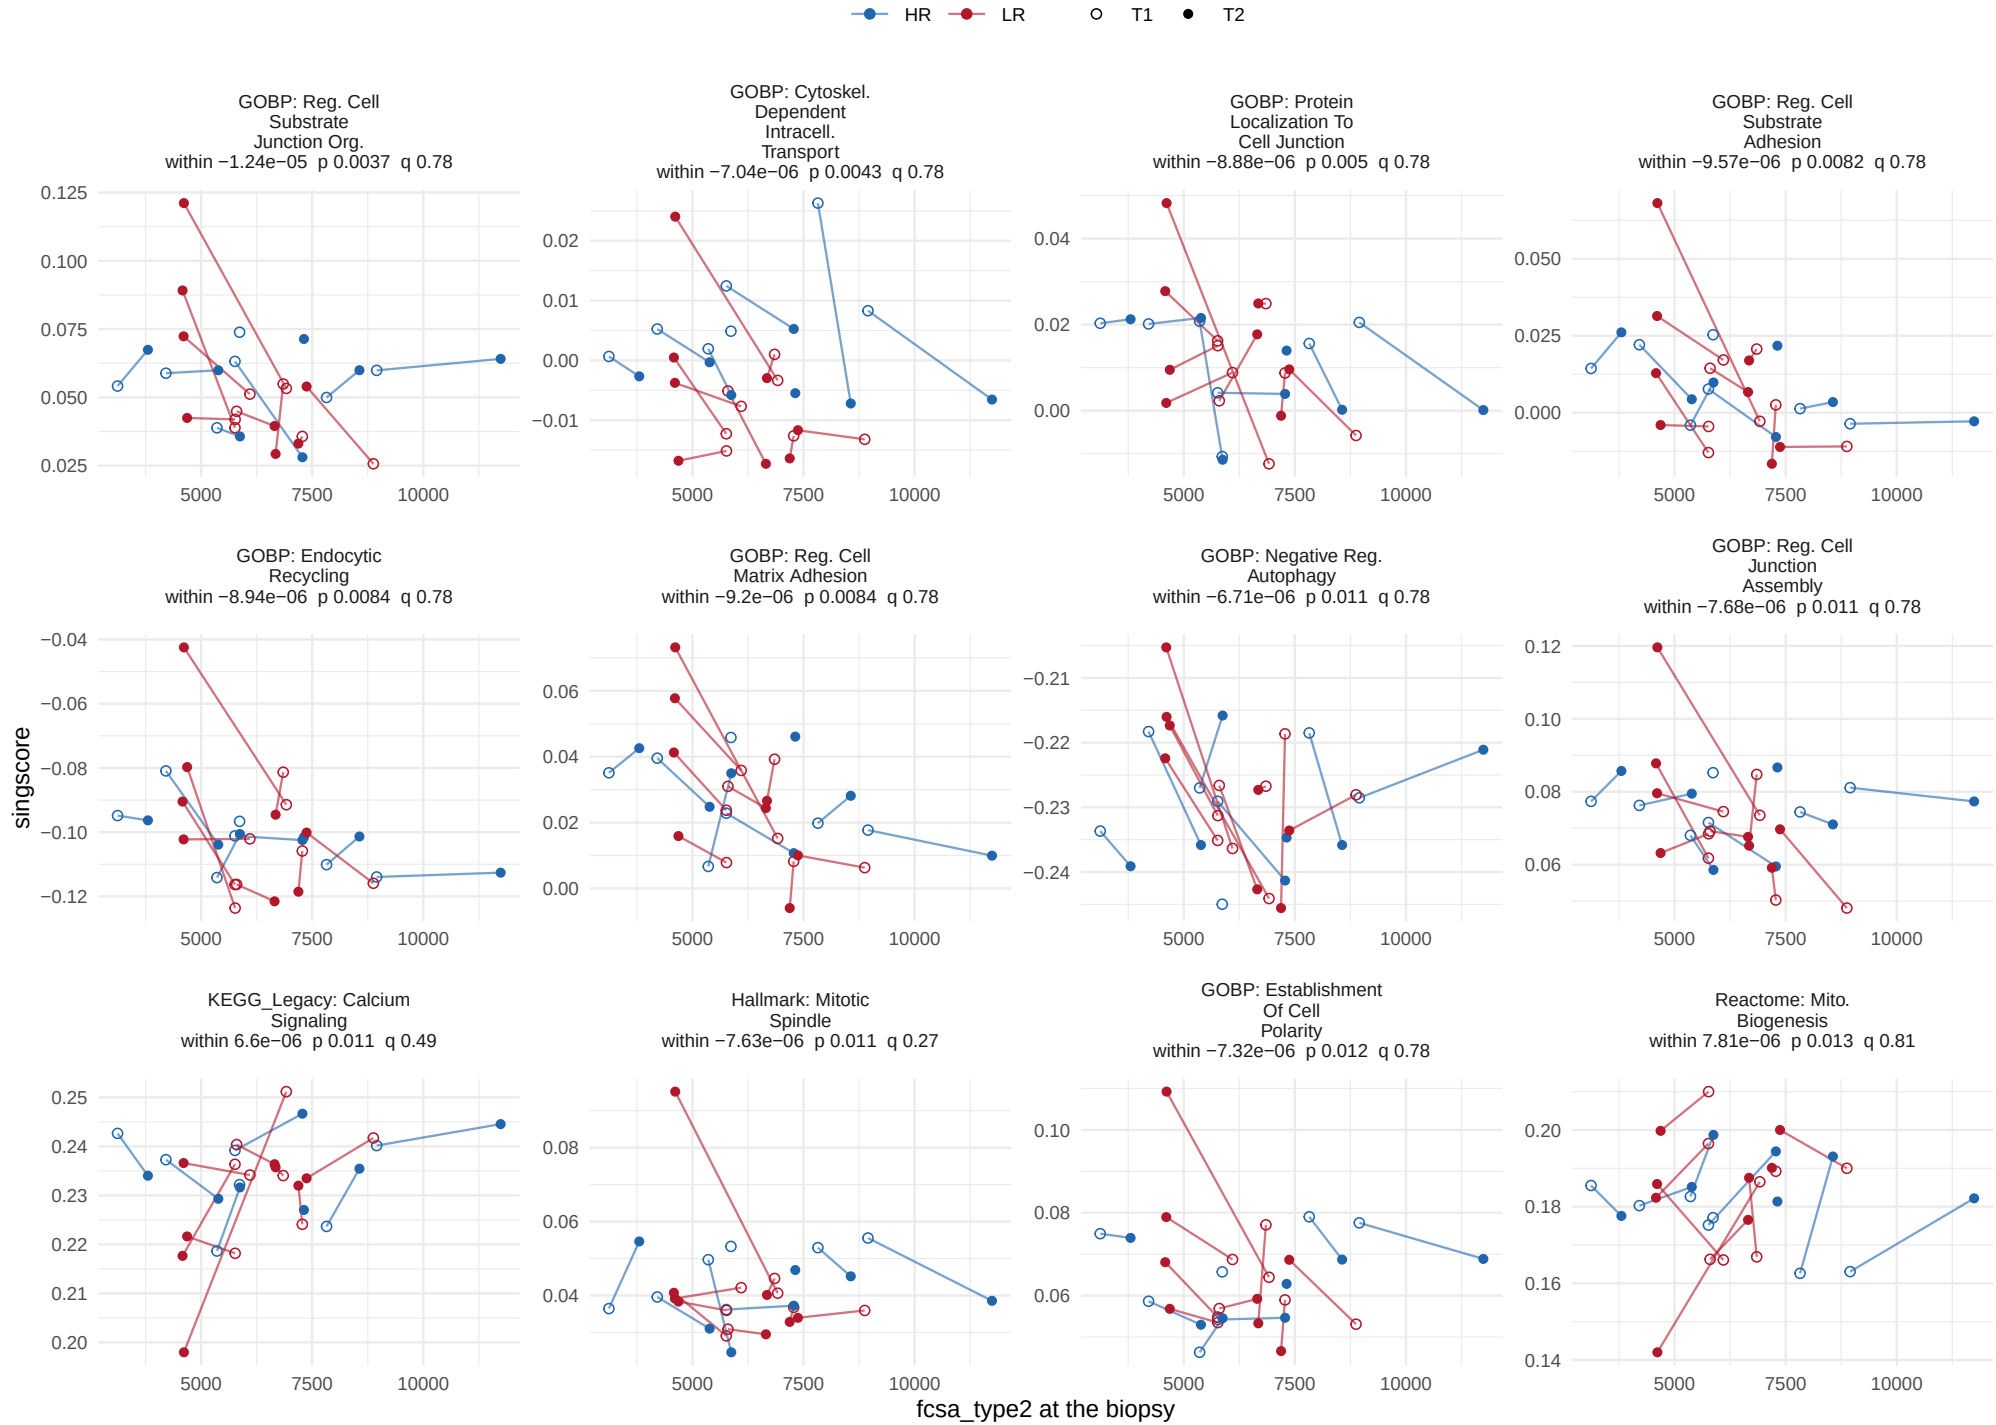

limma on 30 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

fcsa_type2, within−person term


72 of 1378 sets at p < 0.05, 0 at BH < 0.05.

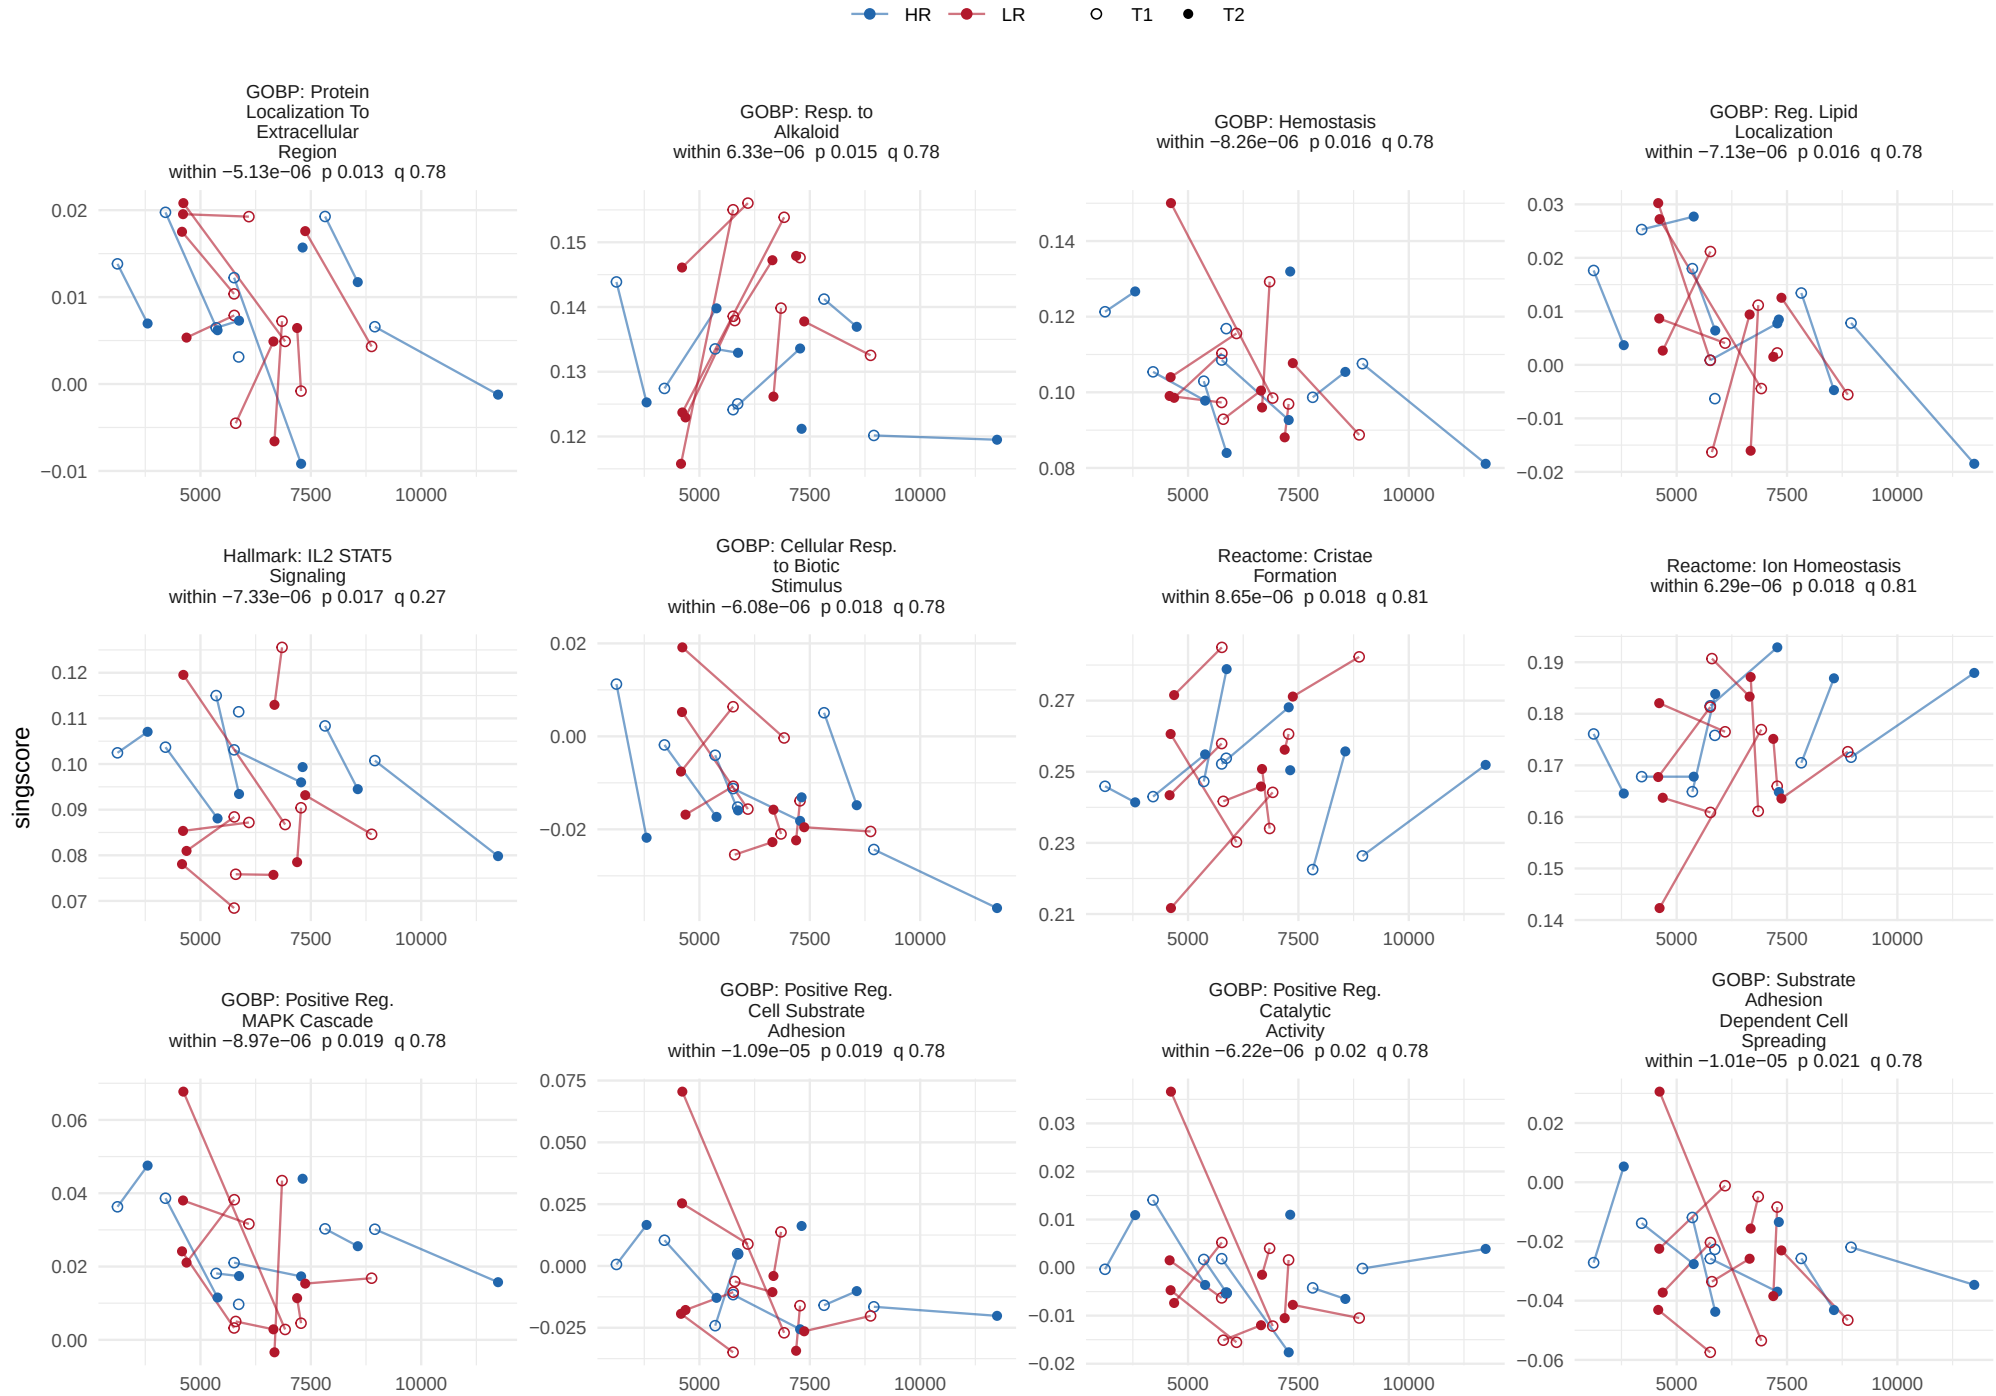

limma on 30 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

fcsa_type2, within−person term


72 of 1378 sets at p < 0.05, 0 at BH < 0.05.

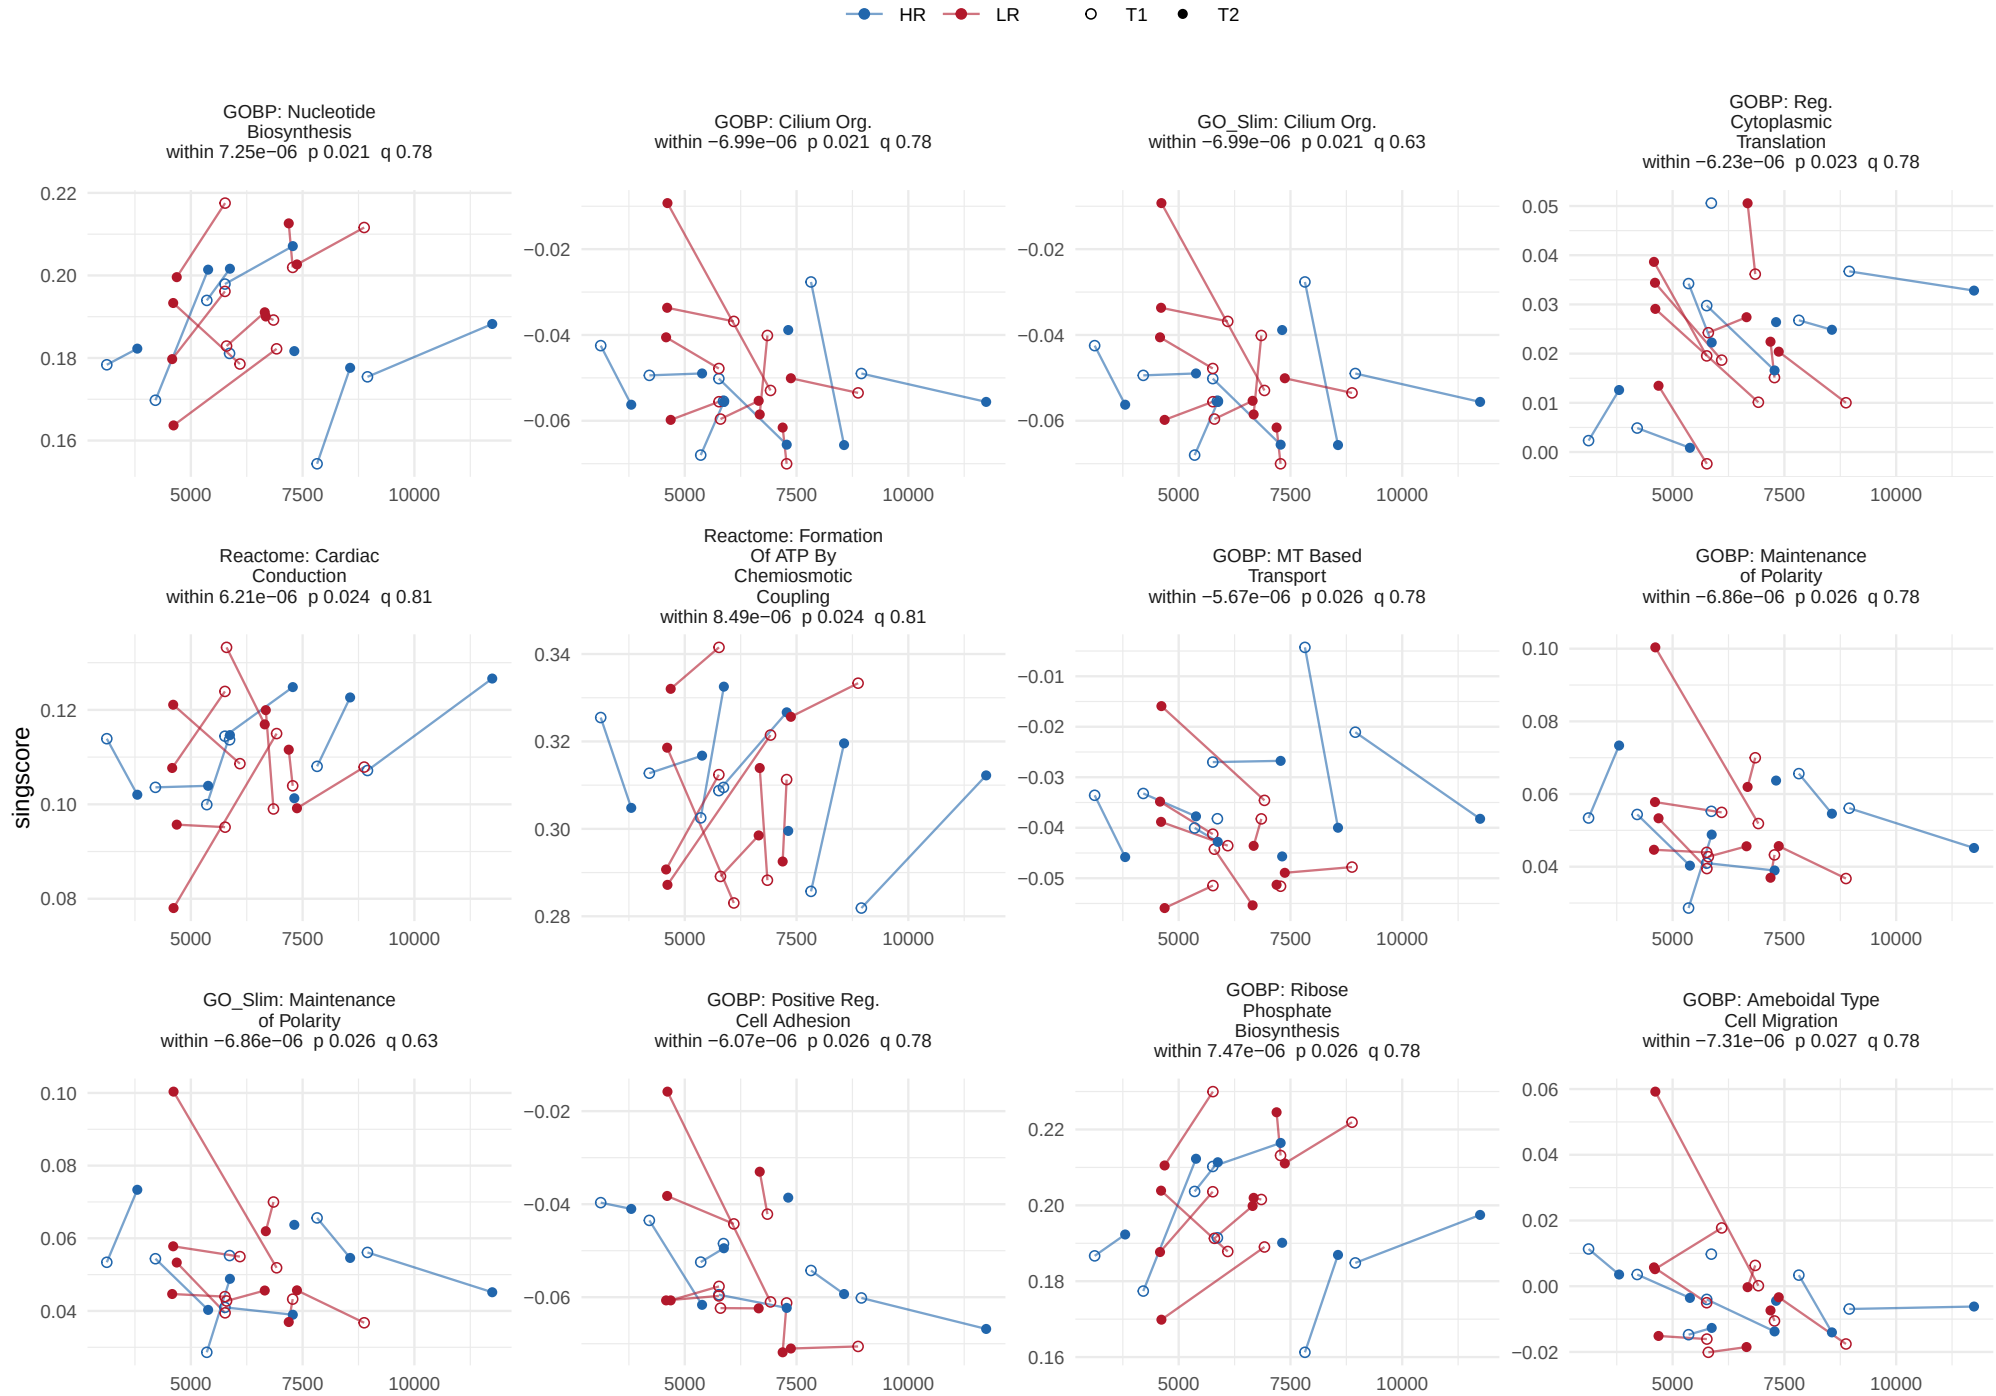

limma on 30 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

fcsa_type2, within−person term


72 of 1378 sets at p < 0.05, 0 at BH < 0.05.

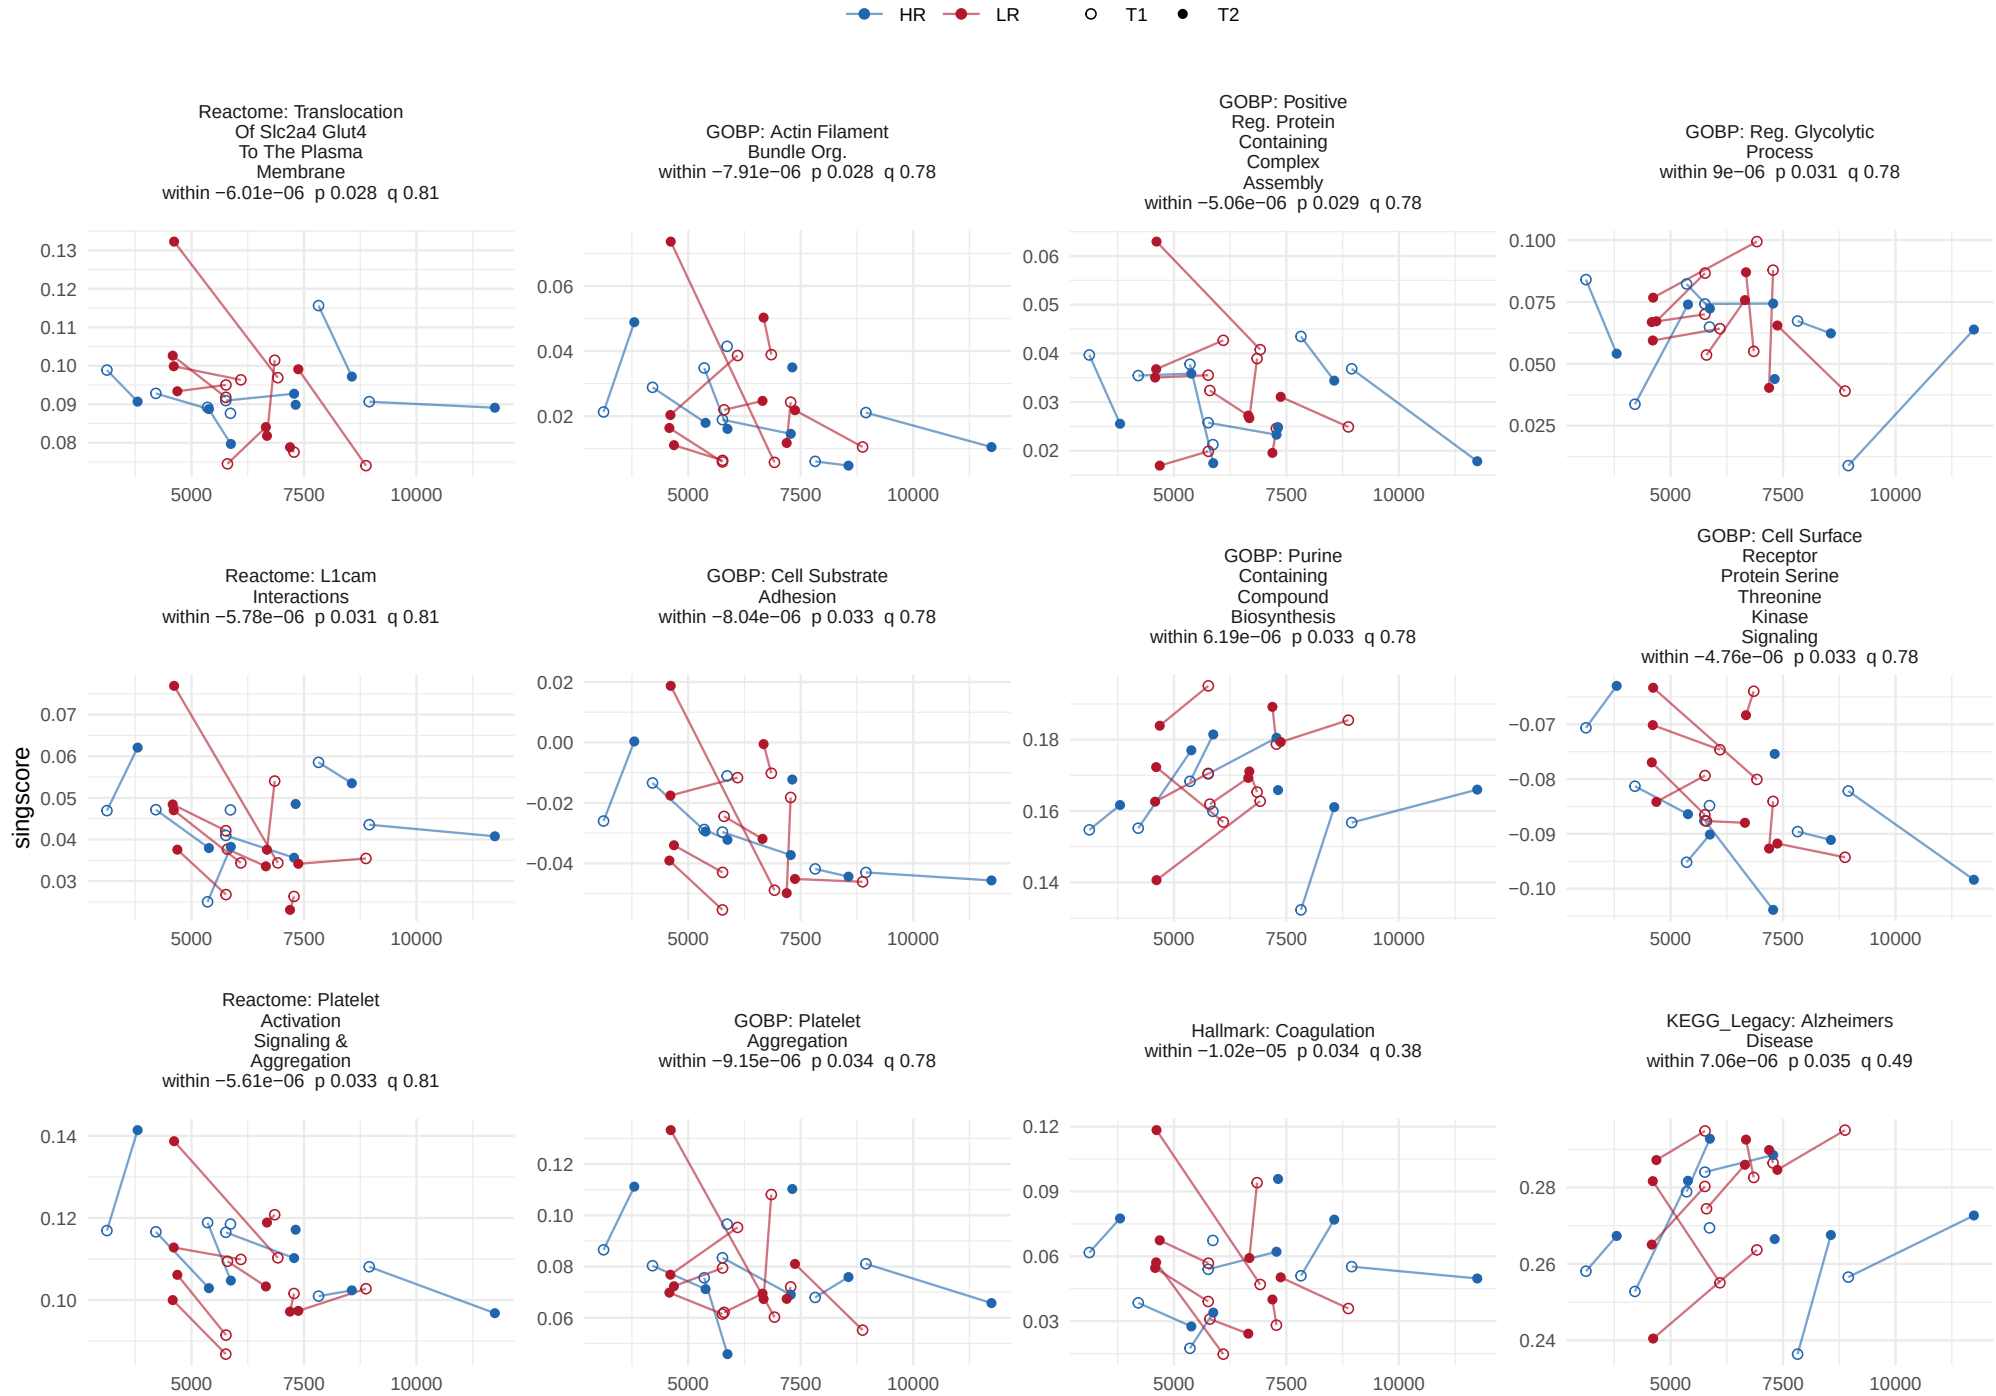

limma on 30 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

fcsa_type2, within−person term


72 of 1378 sets at p < 0.05, 0 at BH < 0.05.

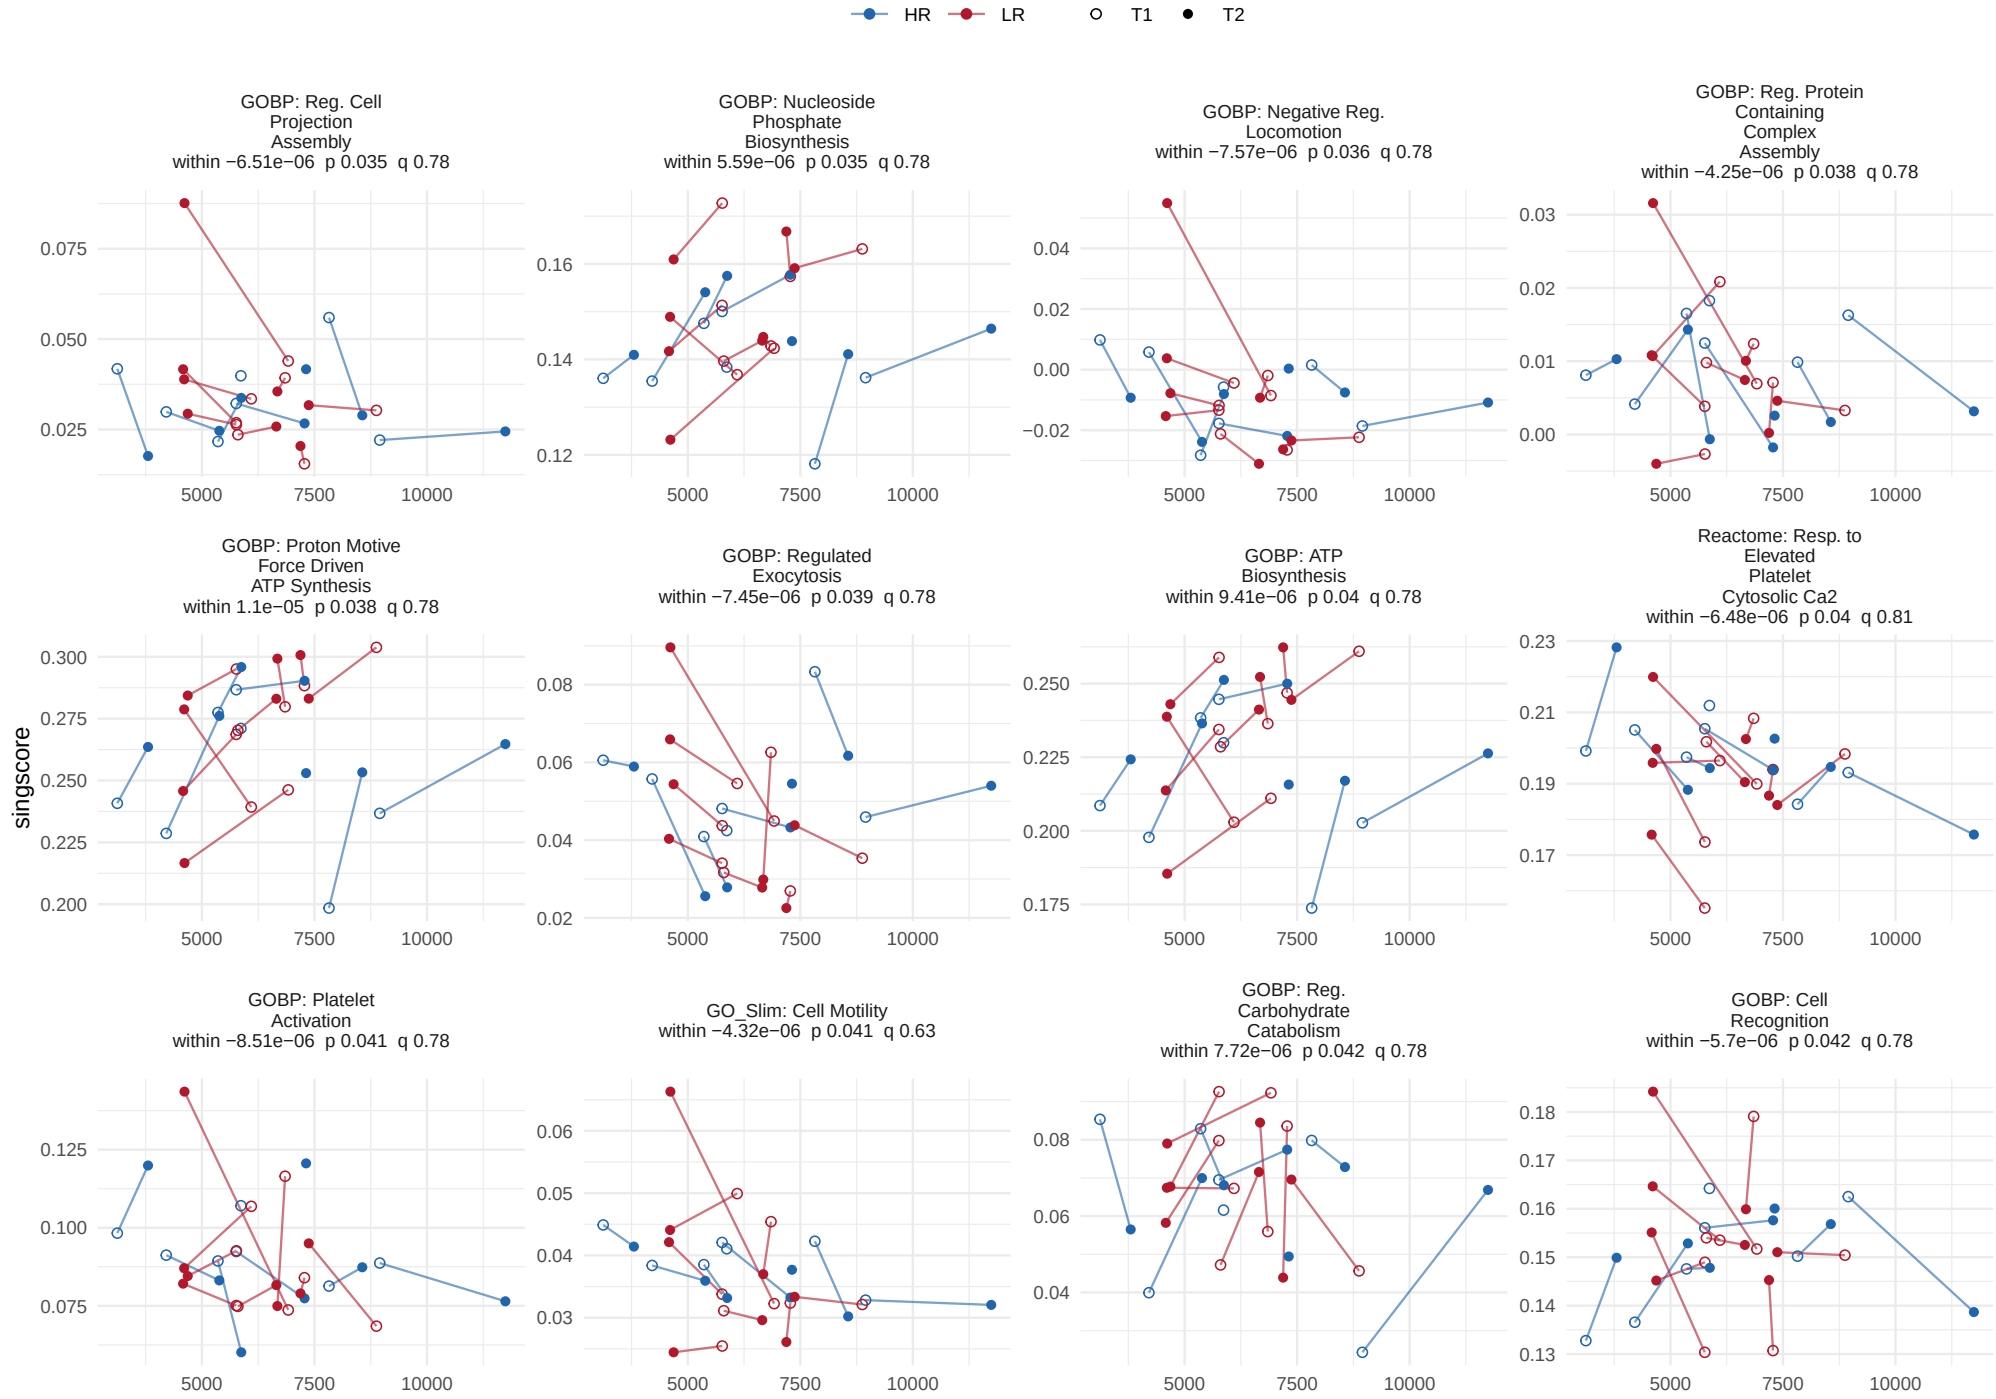

limma on 30 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

fcsa_type2, within−person term


72 of 1378 sets at p < 0.05, 0 at BH < 0.05.

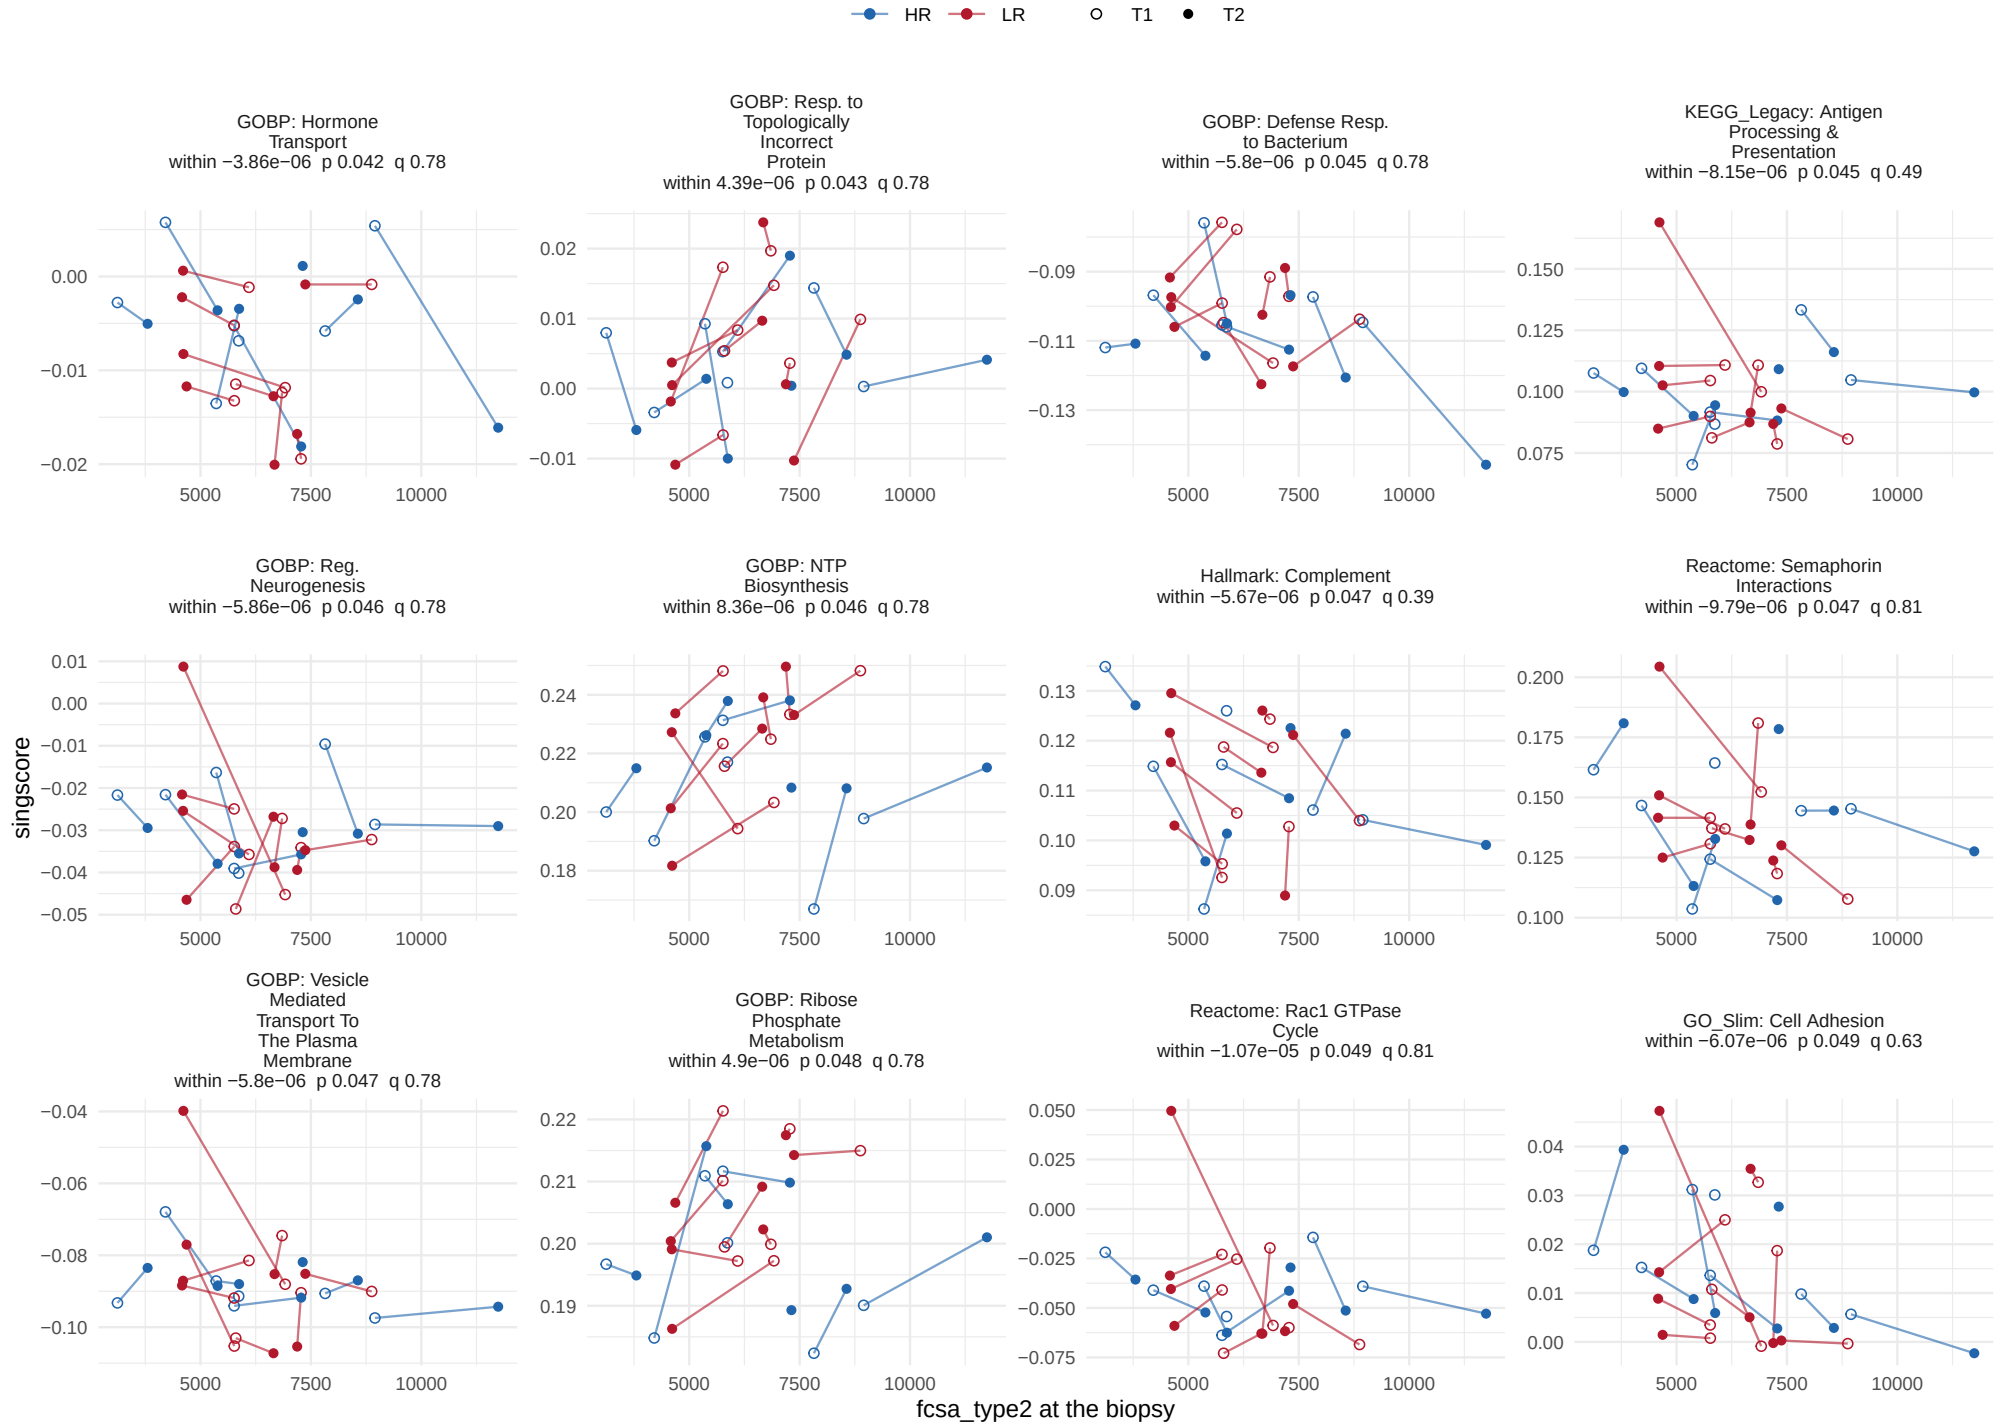

limma on 30 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

fibres_mixed, between−person term


96 of 1378 sets at p < 0.05, 0 at BH < 0.05.

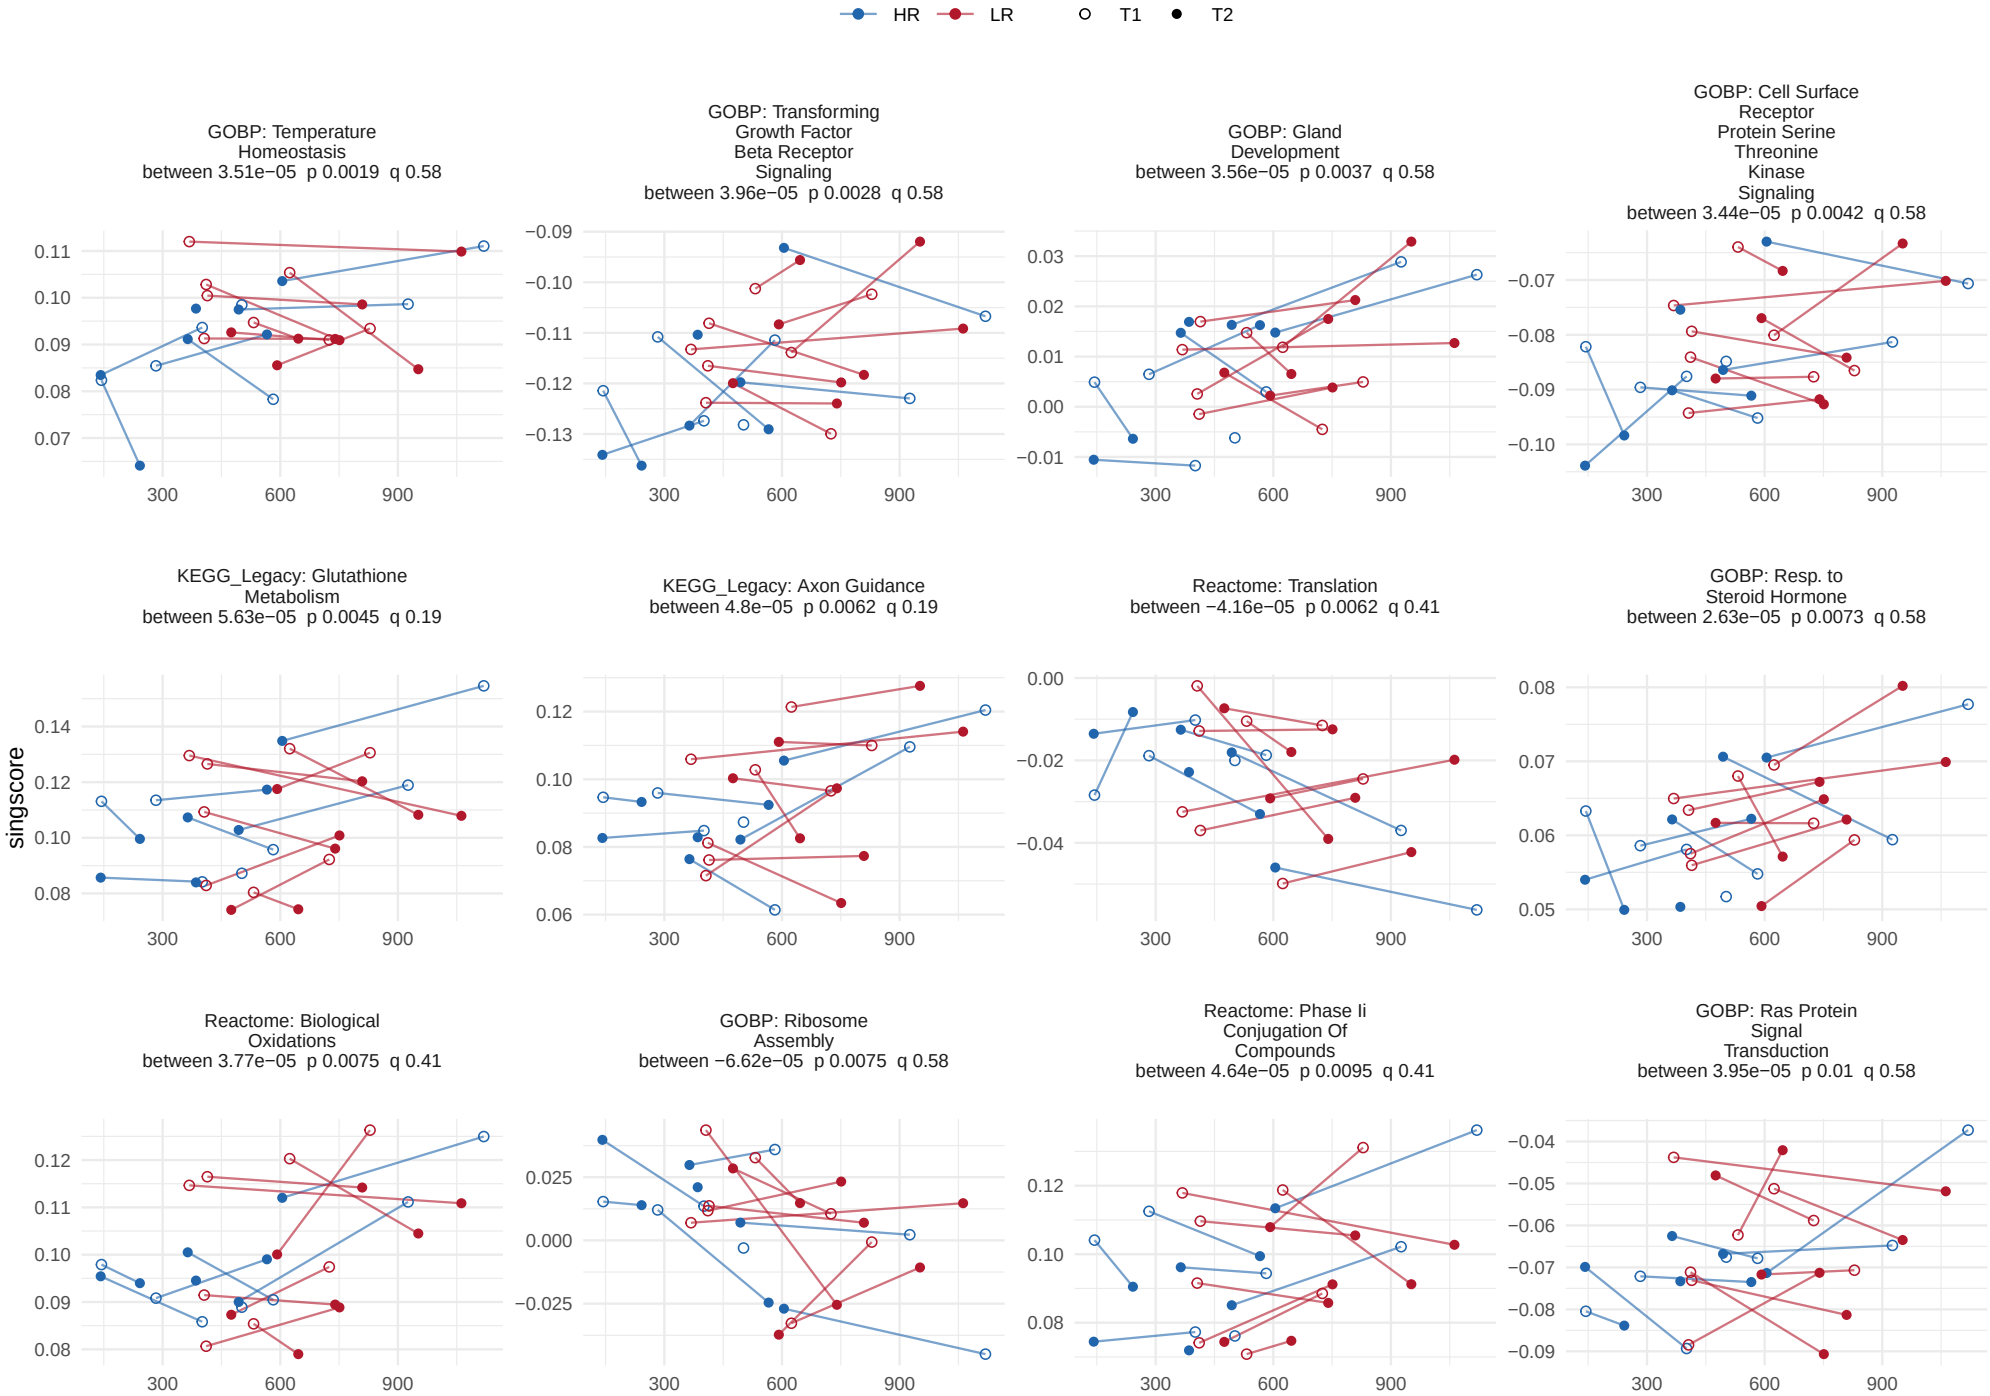

limma on 30 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

fibres_mixed, between−person term


96 of 1378 sets at p < 0.05, 0 at BH < 0.05.

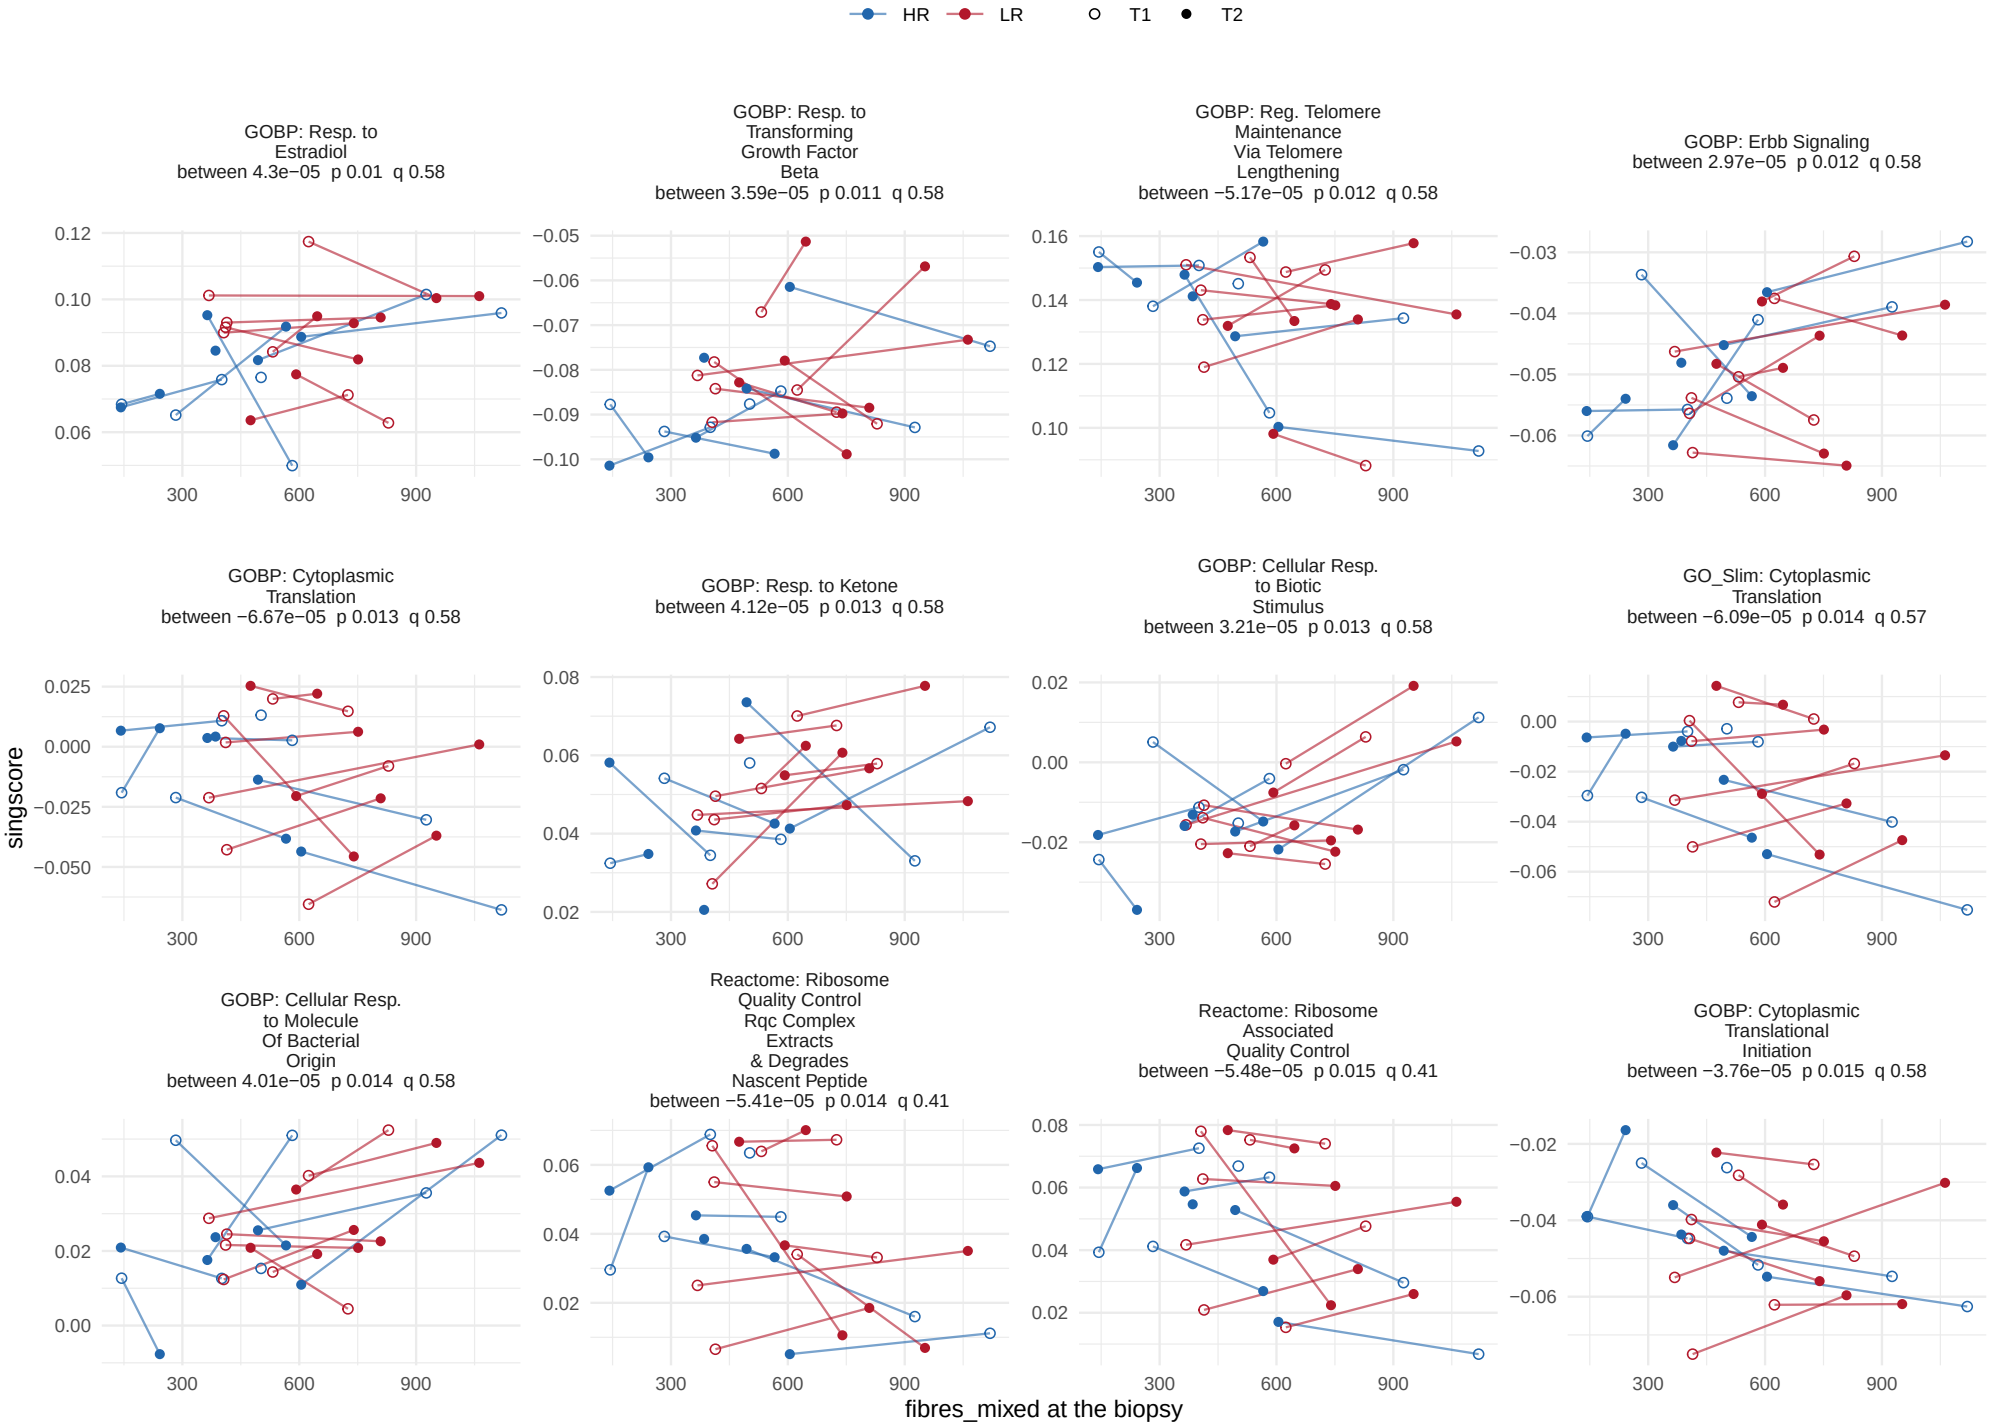

limma on 30 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

fibres_mixed, between−person term


96 of 1378 sets at p < 0.05, 0 at BH < 0.05.

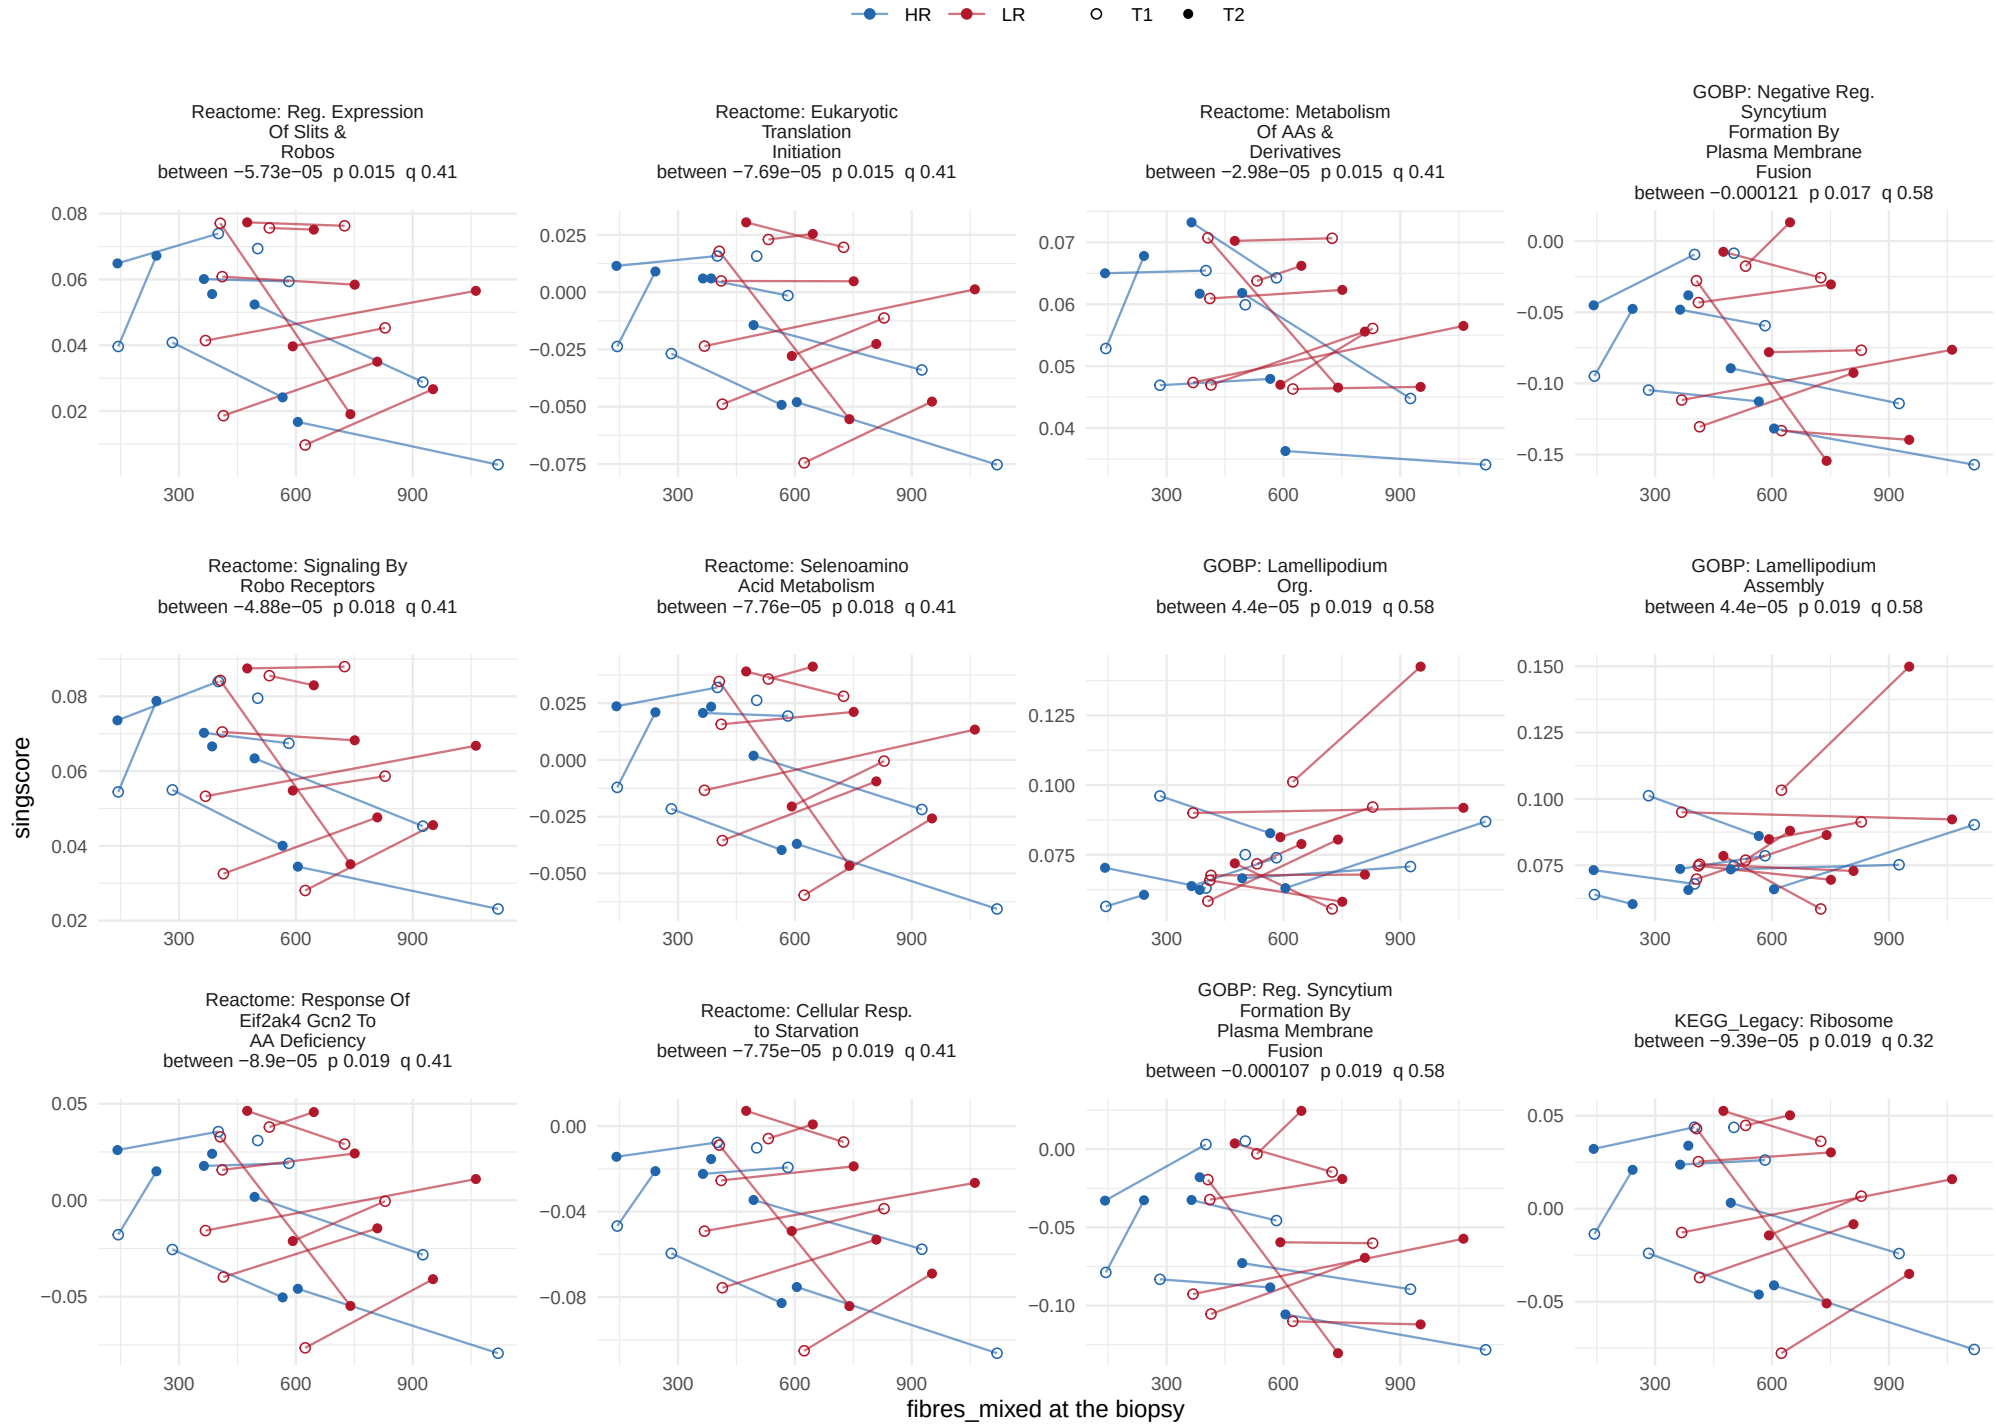

limma on 30 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

fibres_mixed, between−person term


96 of 1378 sets at p < 0.05, 0 at BH < 0.05.

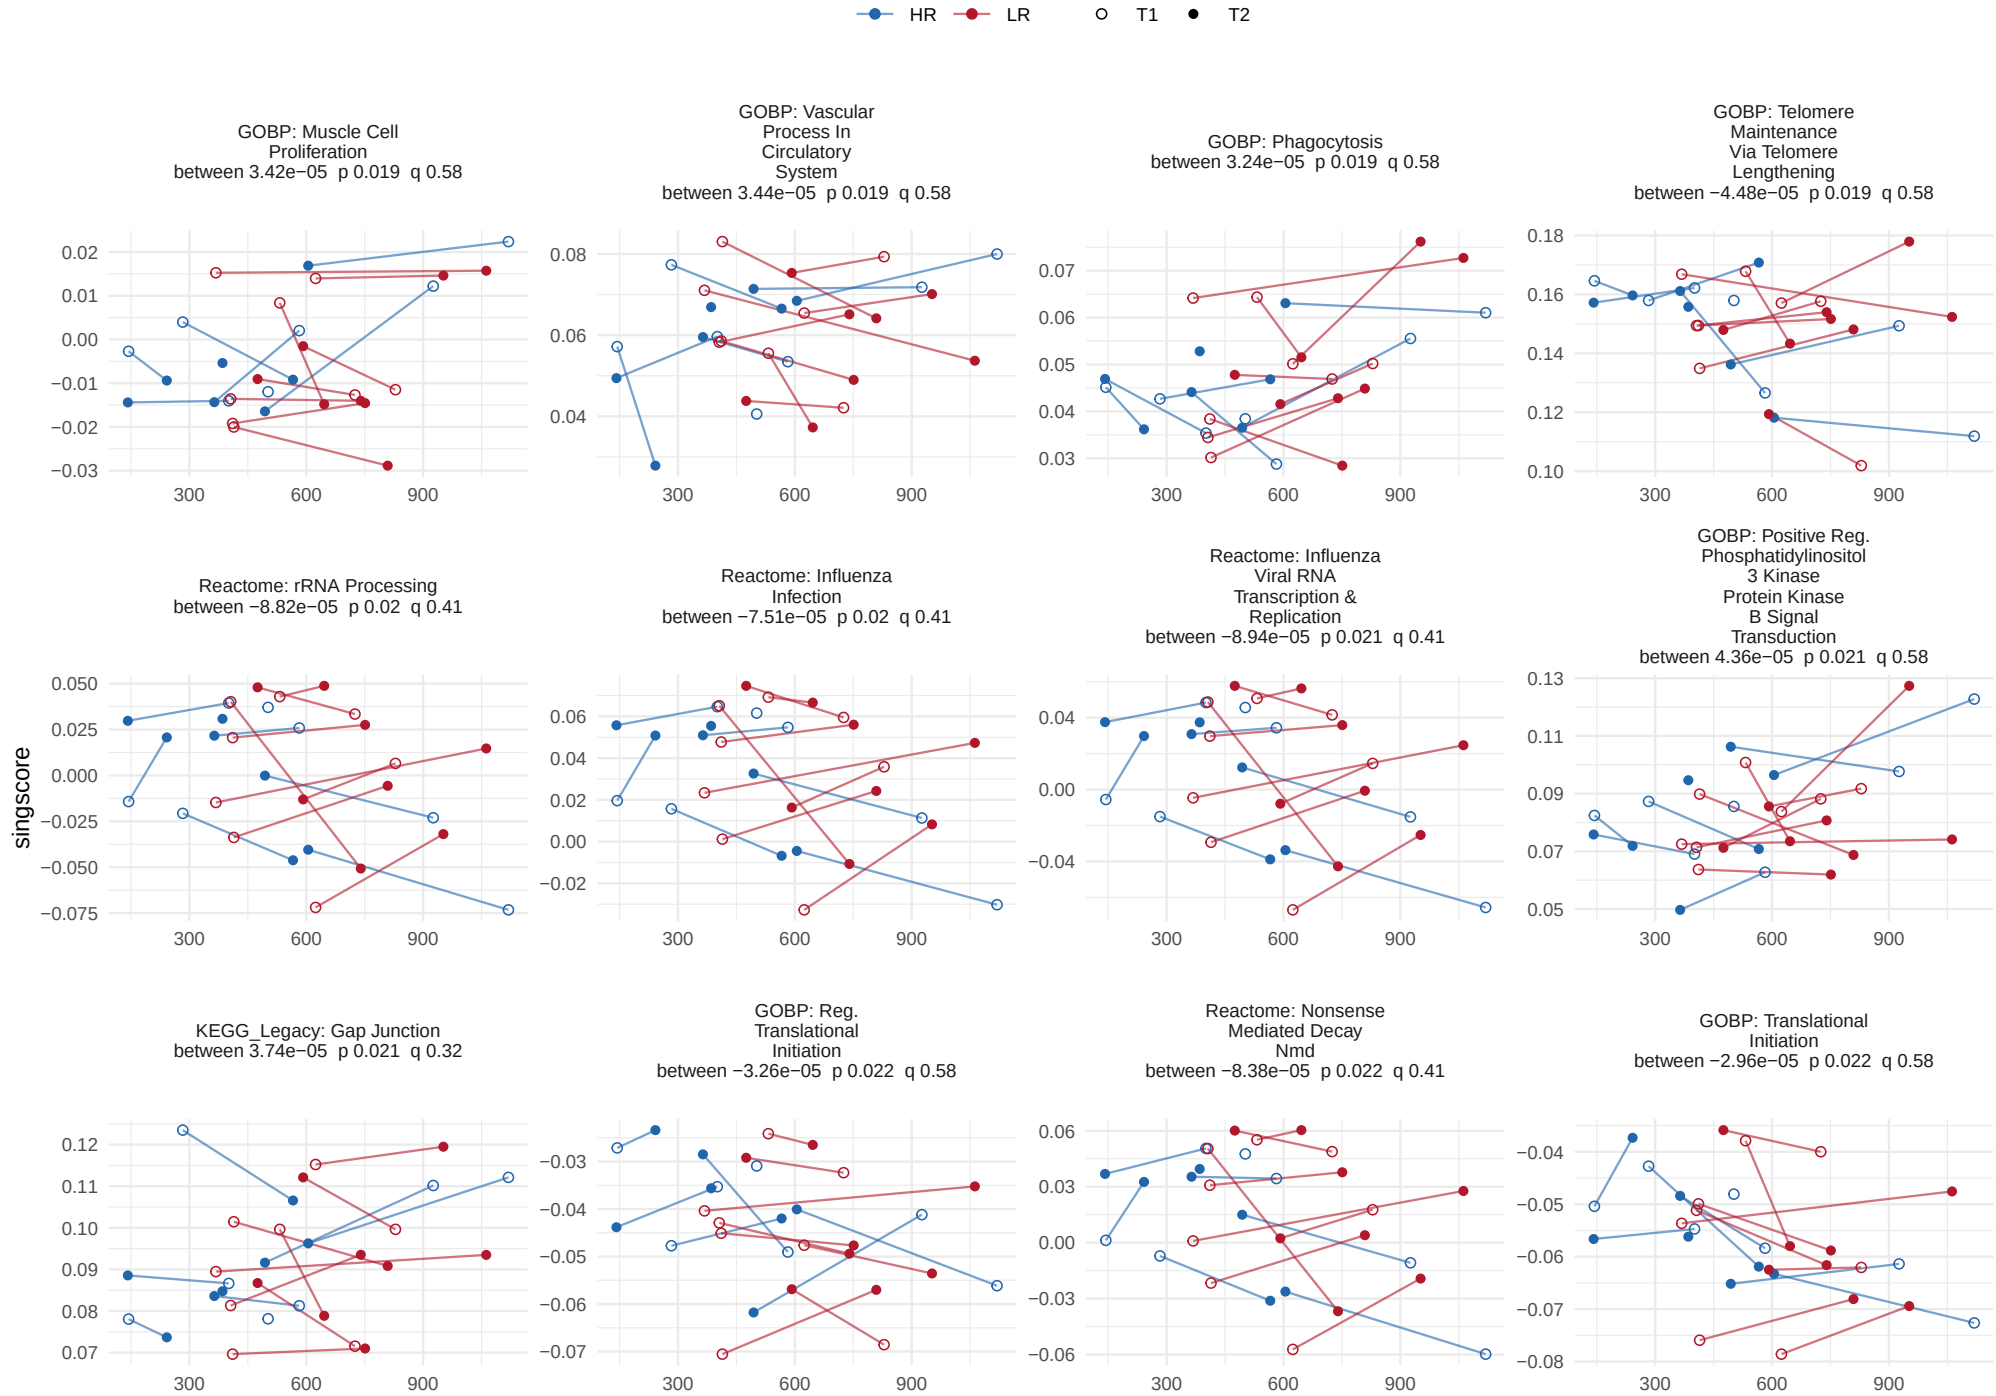

limma on 30 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

fibres_mixed, between−person term


96 of 1378 sets at p < 0.05, 0 at BH < 0.05.

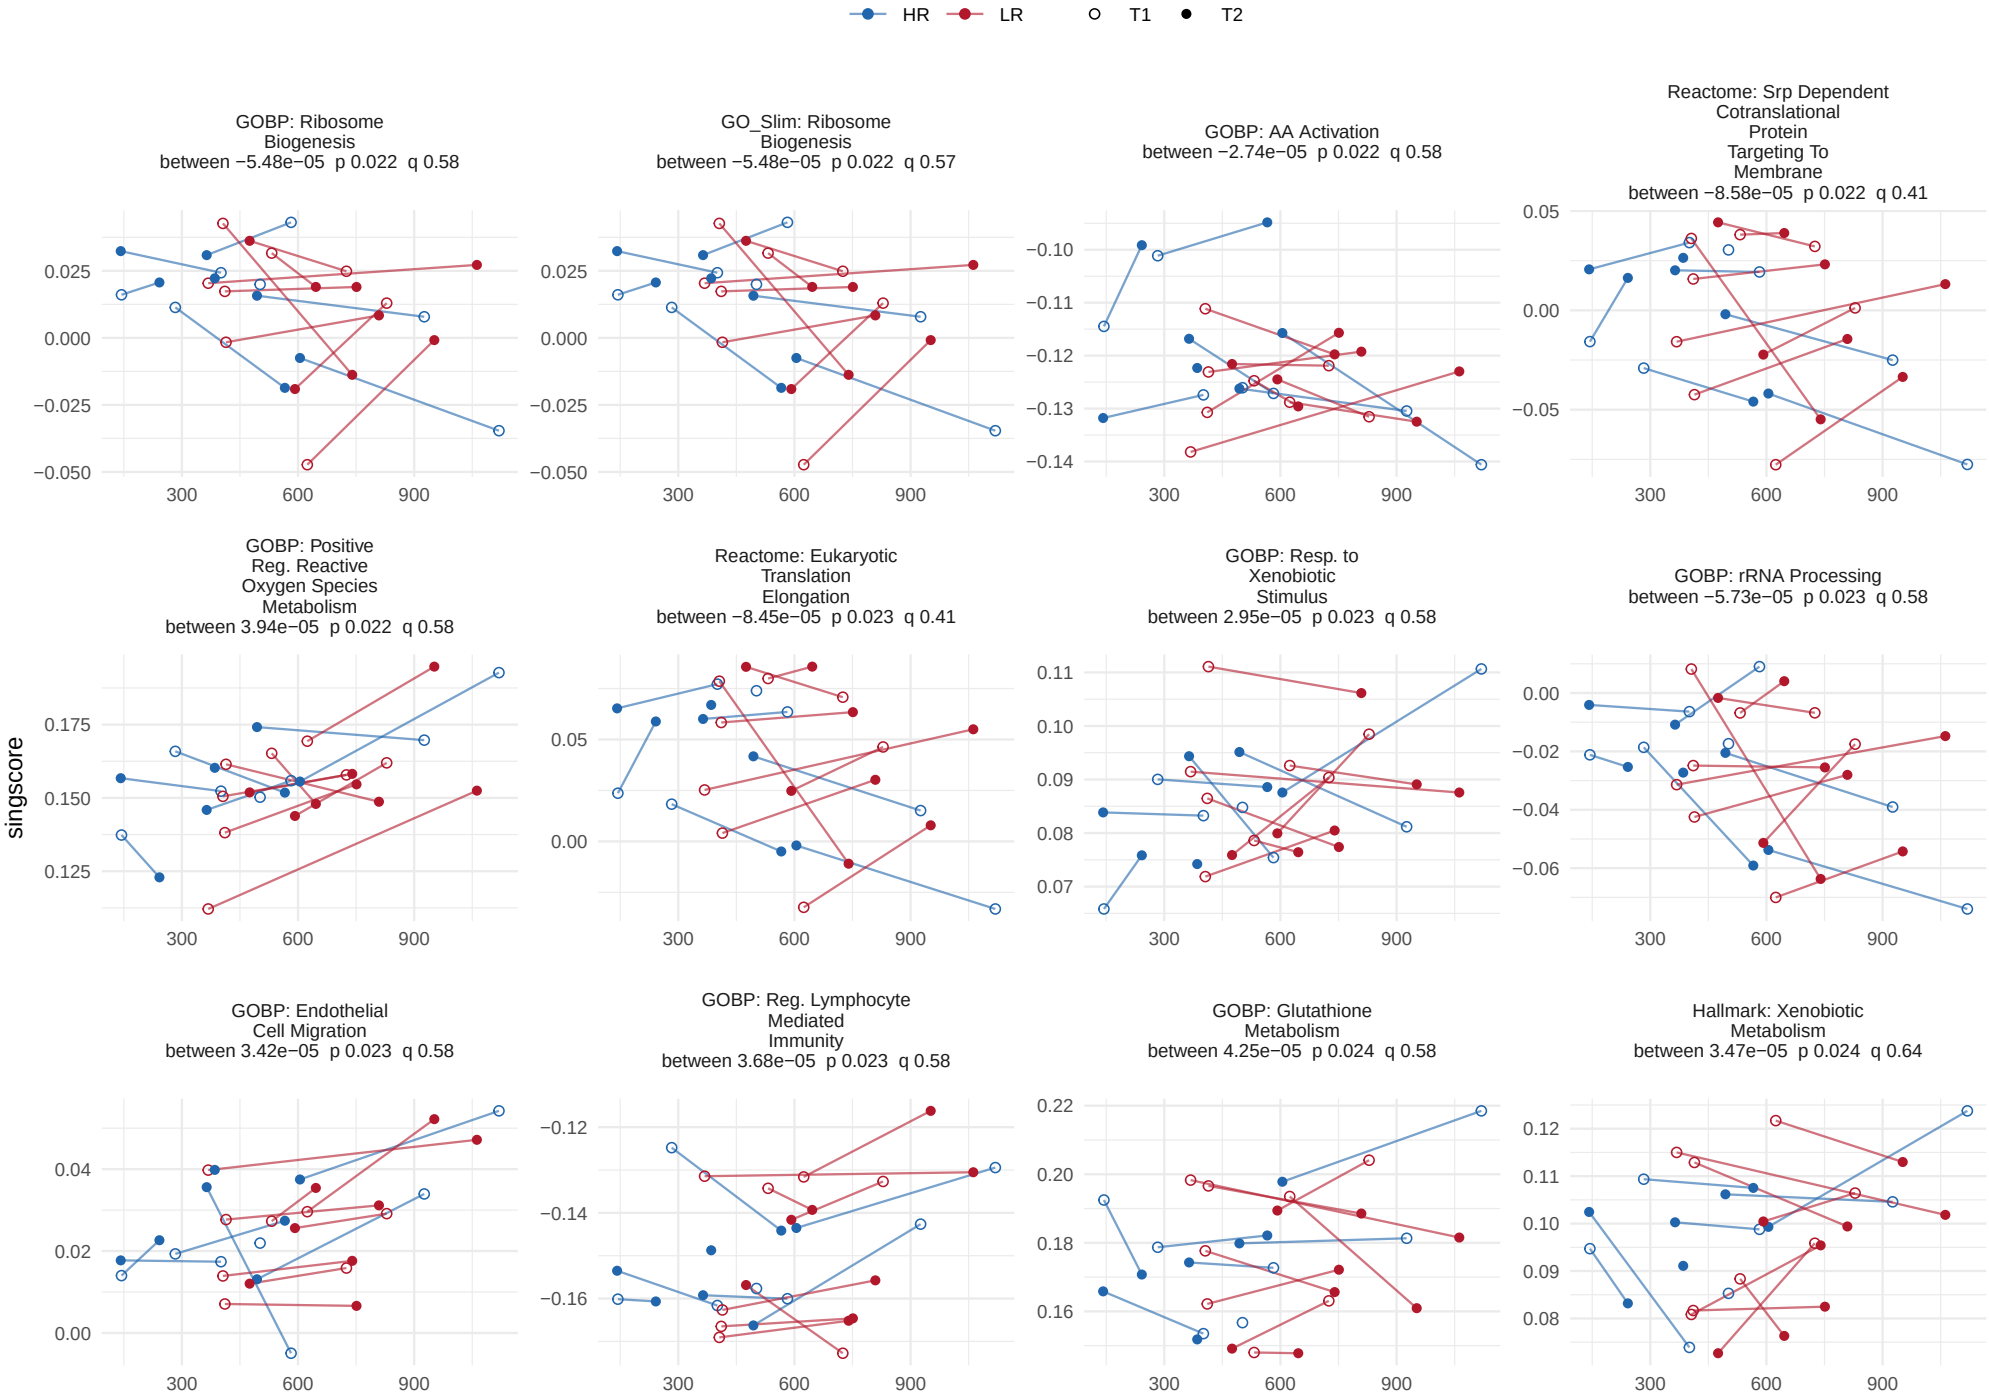

limma on 30 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

fibres_mixed, between−person term


96 of 1378 sets at p < 0.05, 0 at BH < 0.05.

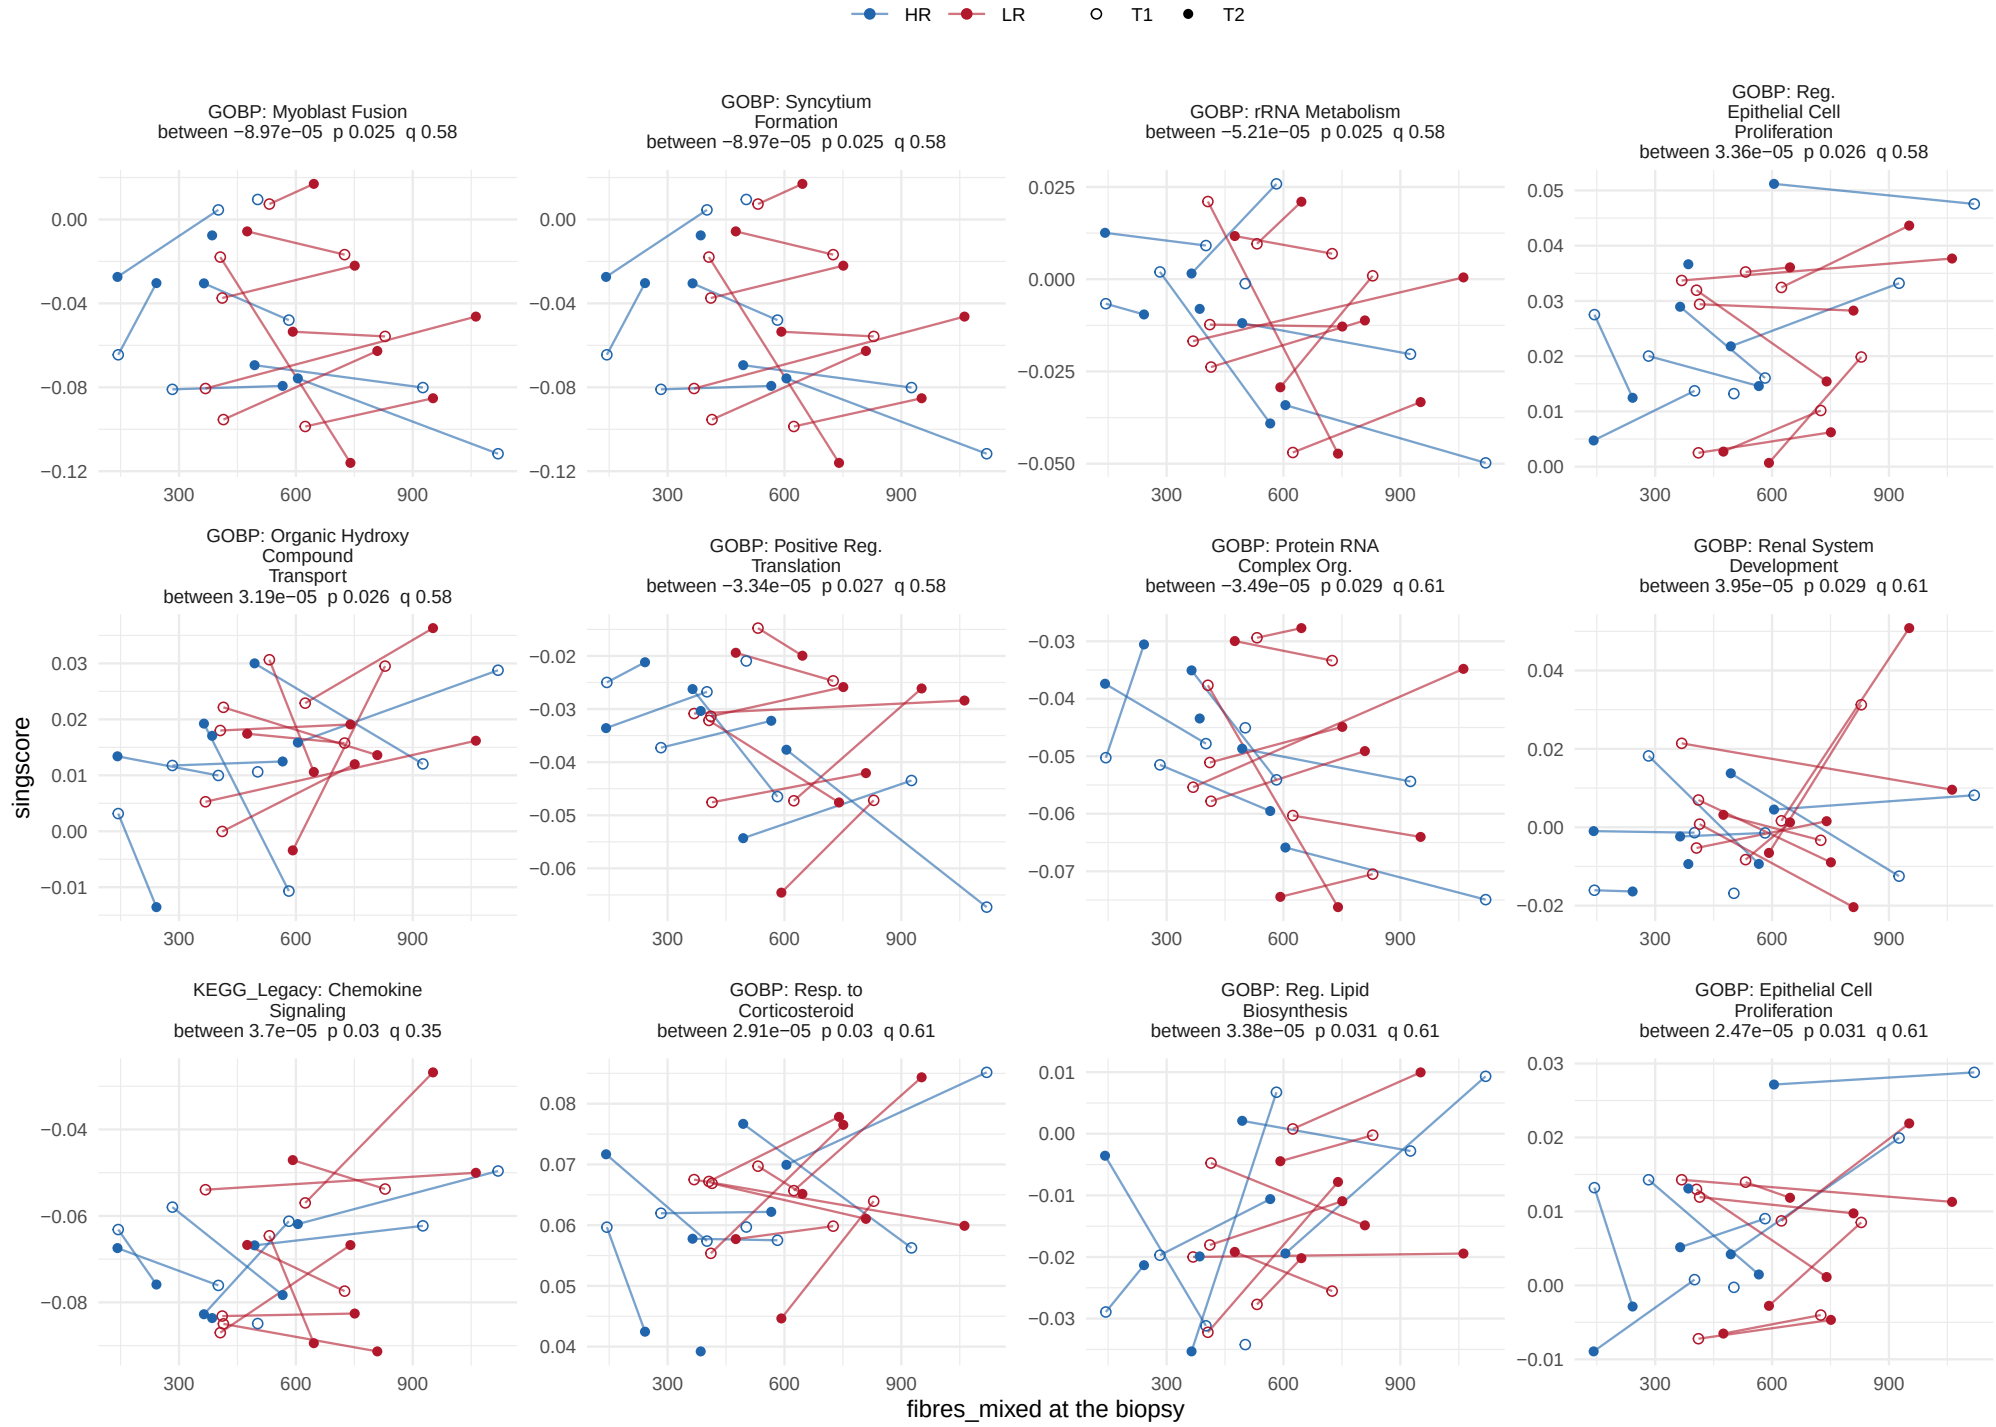

limma on 30 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

fibres_mixed, between−person term


96 of 1378 sets at p < 0.05, 0 at BH < 0.05.

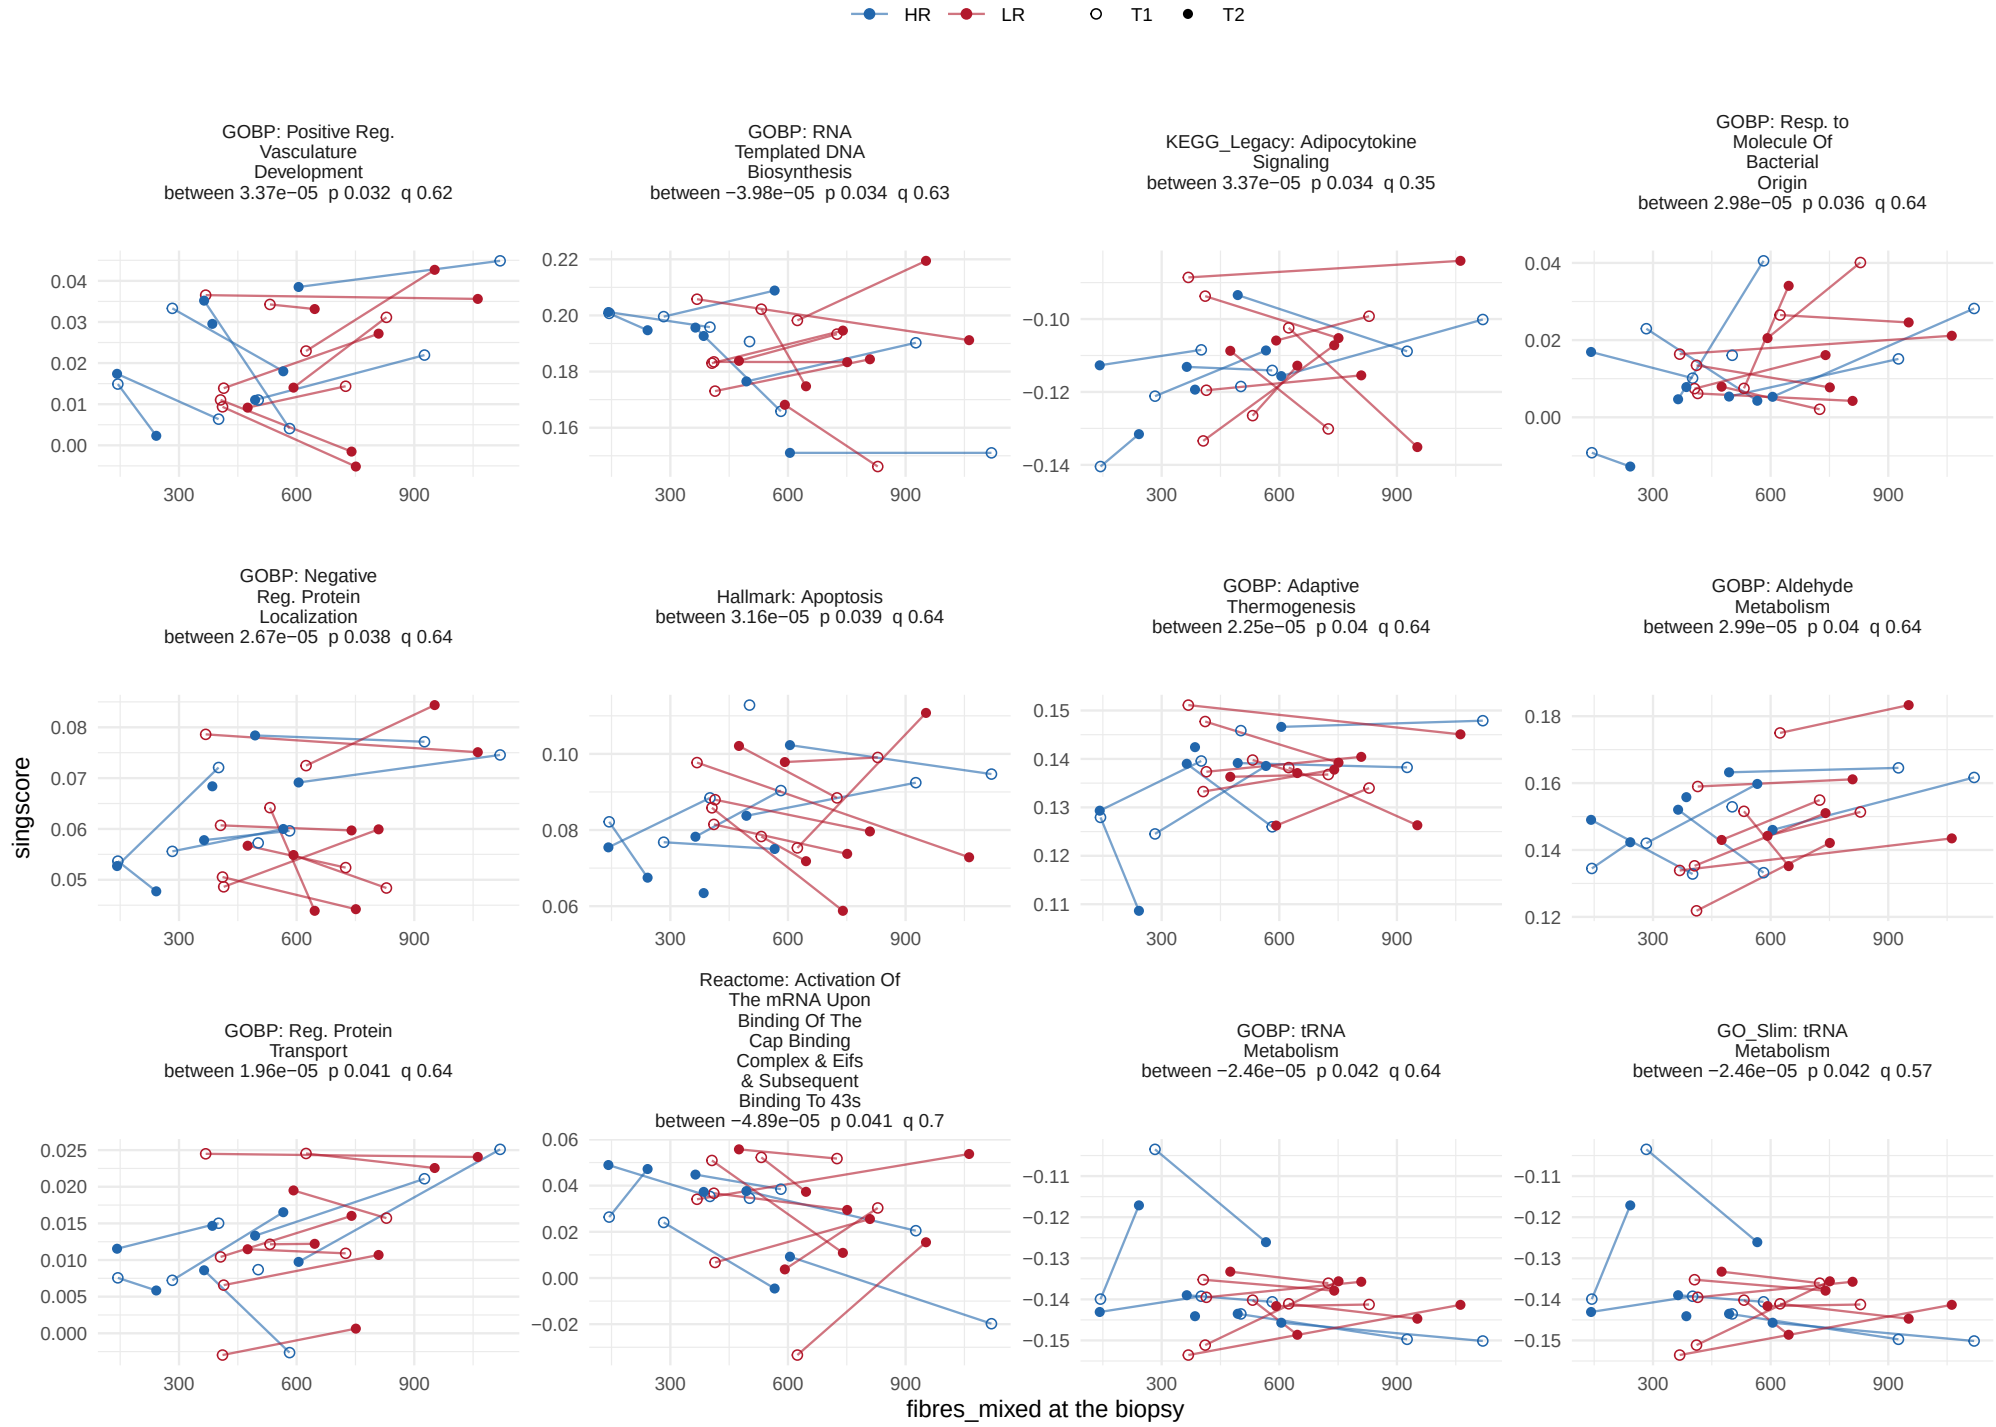

limma on 30 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

fibres_mixed, between−person term

96 of 1378 sets at p < 0.05, 0 at BH < 0.05.

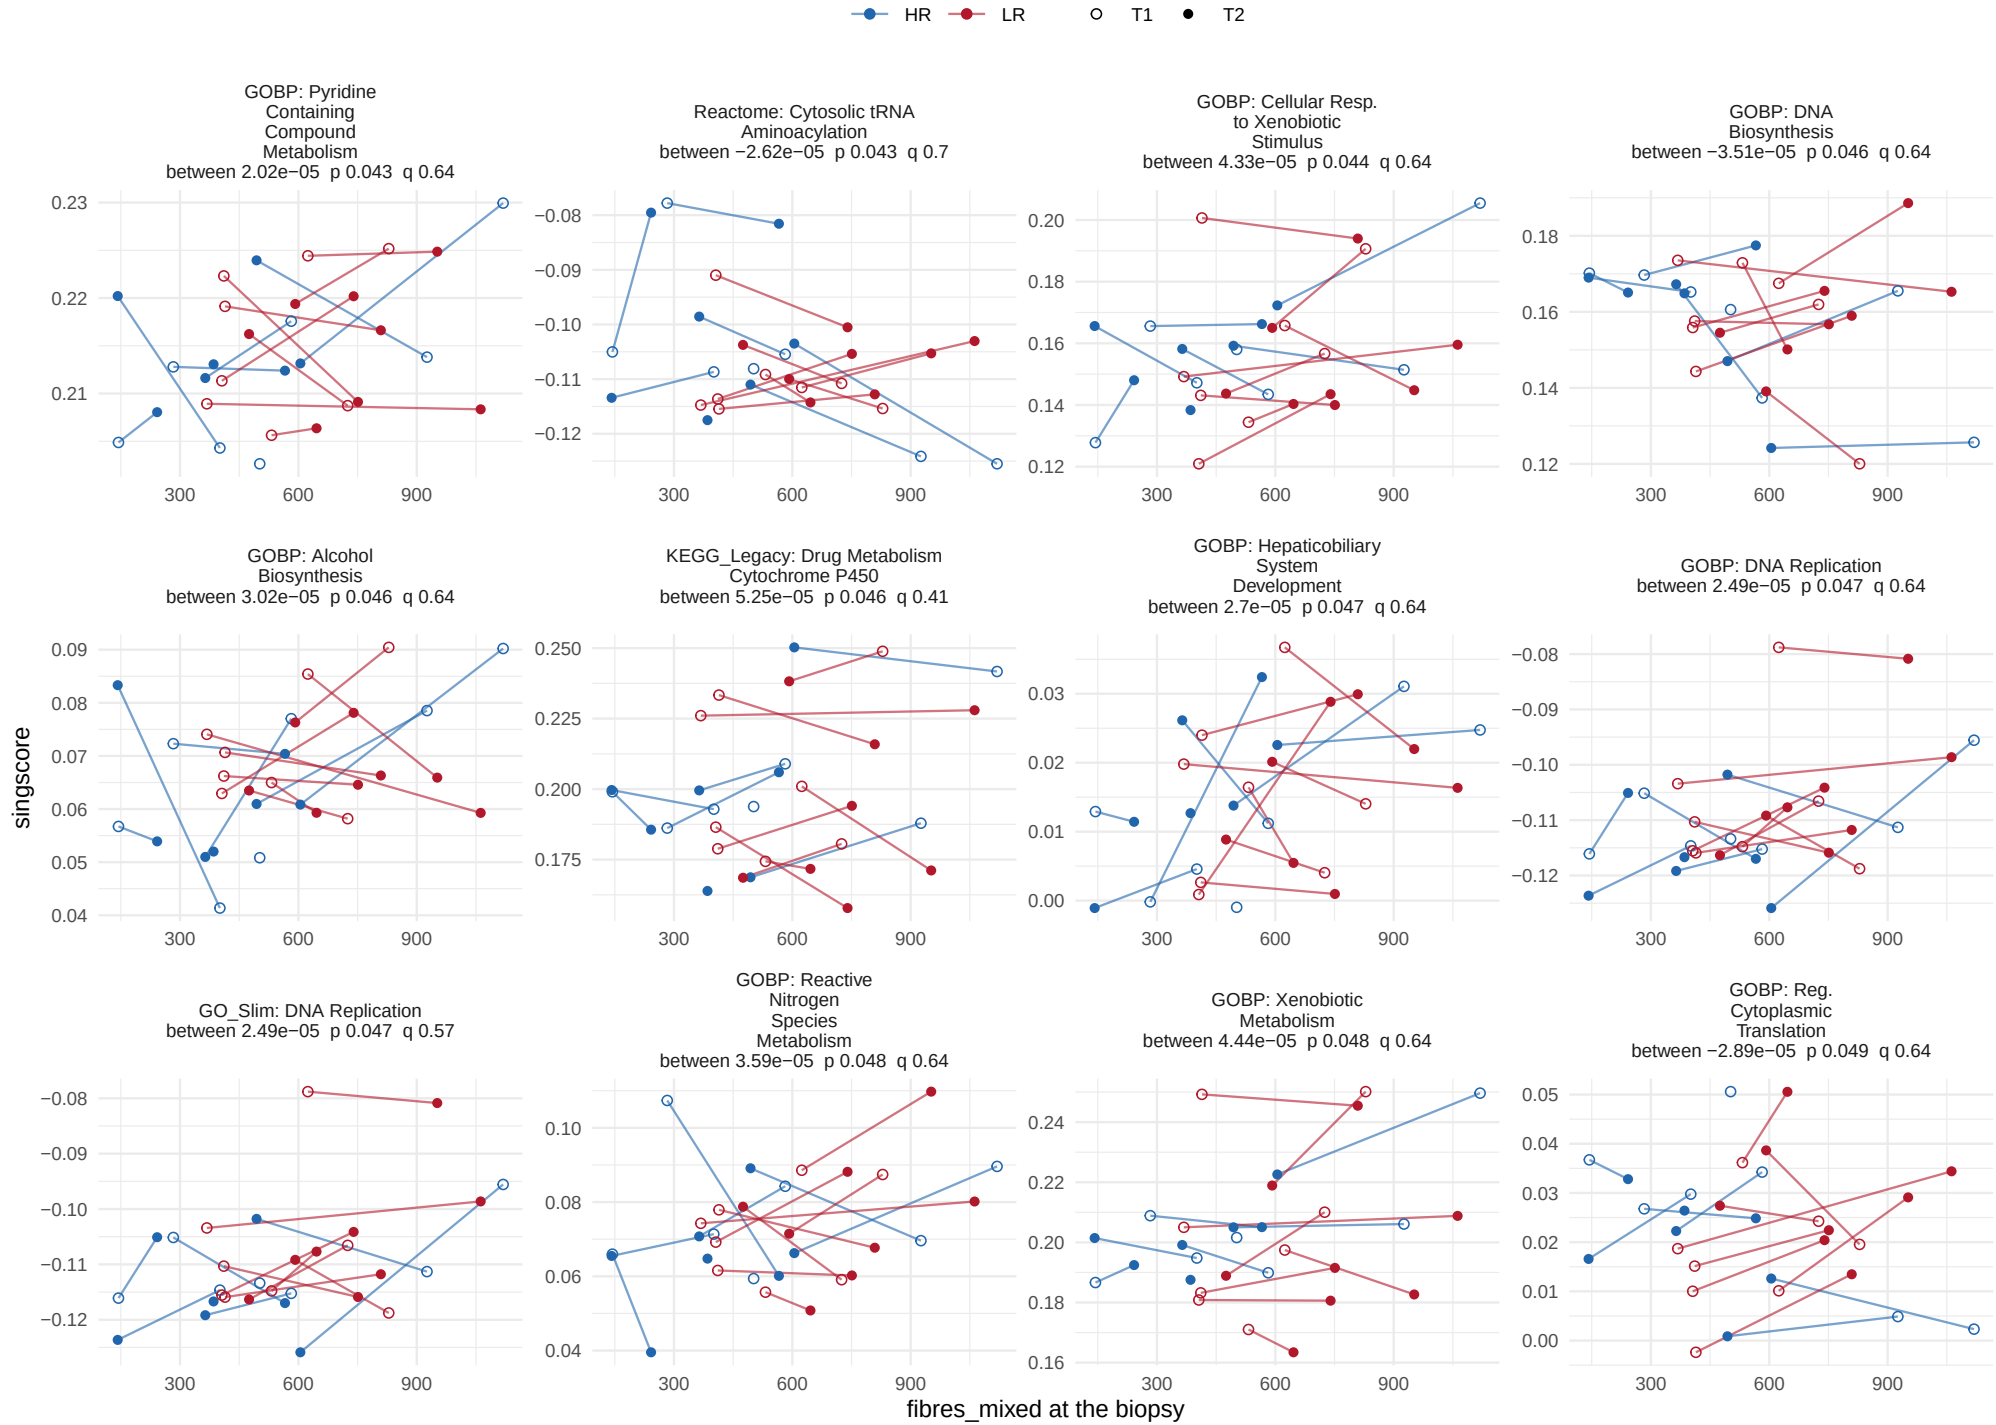

limma on 30 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

fibres_mixed, within−person term

25 of 1378 sets at p < 0.05, 0 at BH < 0.05.

HR LR T1 T2

GOBP: Midbrain Development within 2.37e−05 p 0.0015 q 1

GOBP: Protein Tetramerization within −3.16e−05 p 0.003 q 1

GOBP: Neural Nucleus Development within 2.08e−05 p 0.0056 q 1

GOBP: Substantia Nigra Development within 2.08e−05 p 0.0056 q 1

GOBP: Cellular Resp. to Biotic Stimulus within 2.53e−05 p 0.01 q 1

GOBP: Positive Reg. Reactive Oxygen Species Metabolism within 3.3e−05 p 0.012 q 1

GOBP: Positive Reg. Protein Localization To Nucleus within −2.52e−05 p 0.02 q 1


GOBP: Protein DNA Complex Org. within −5.57e−05 p 0.021 q 1

GOBP: Resp. to Leukemia Inhibitory Factor within 3.15e−05 p 0.021 q 1

GOBP: Reg. Non Canonical Nf Kappab Signal Transduction within 2.48e−05 p 0.023 q 1

GOBP: Retrograde Transport Endosome To Golgi within 3.35e−05 p 0.025 q 1


Reactome: Rho Gtpases Activate Pkns within −3.15e−05 p 0.026 q 0.97

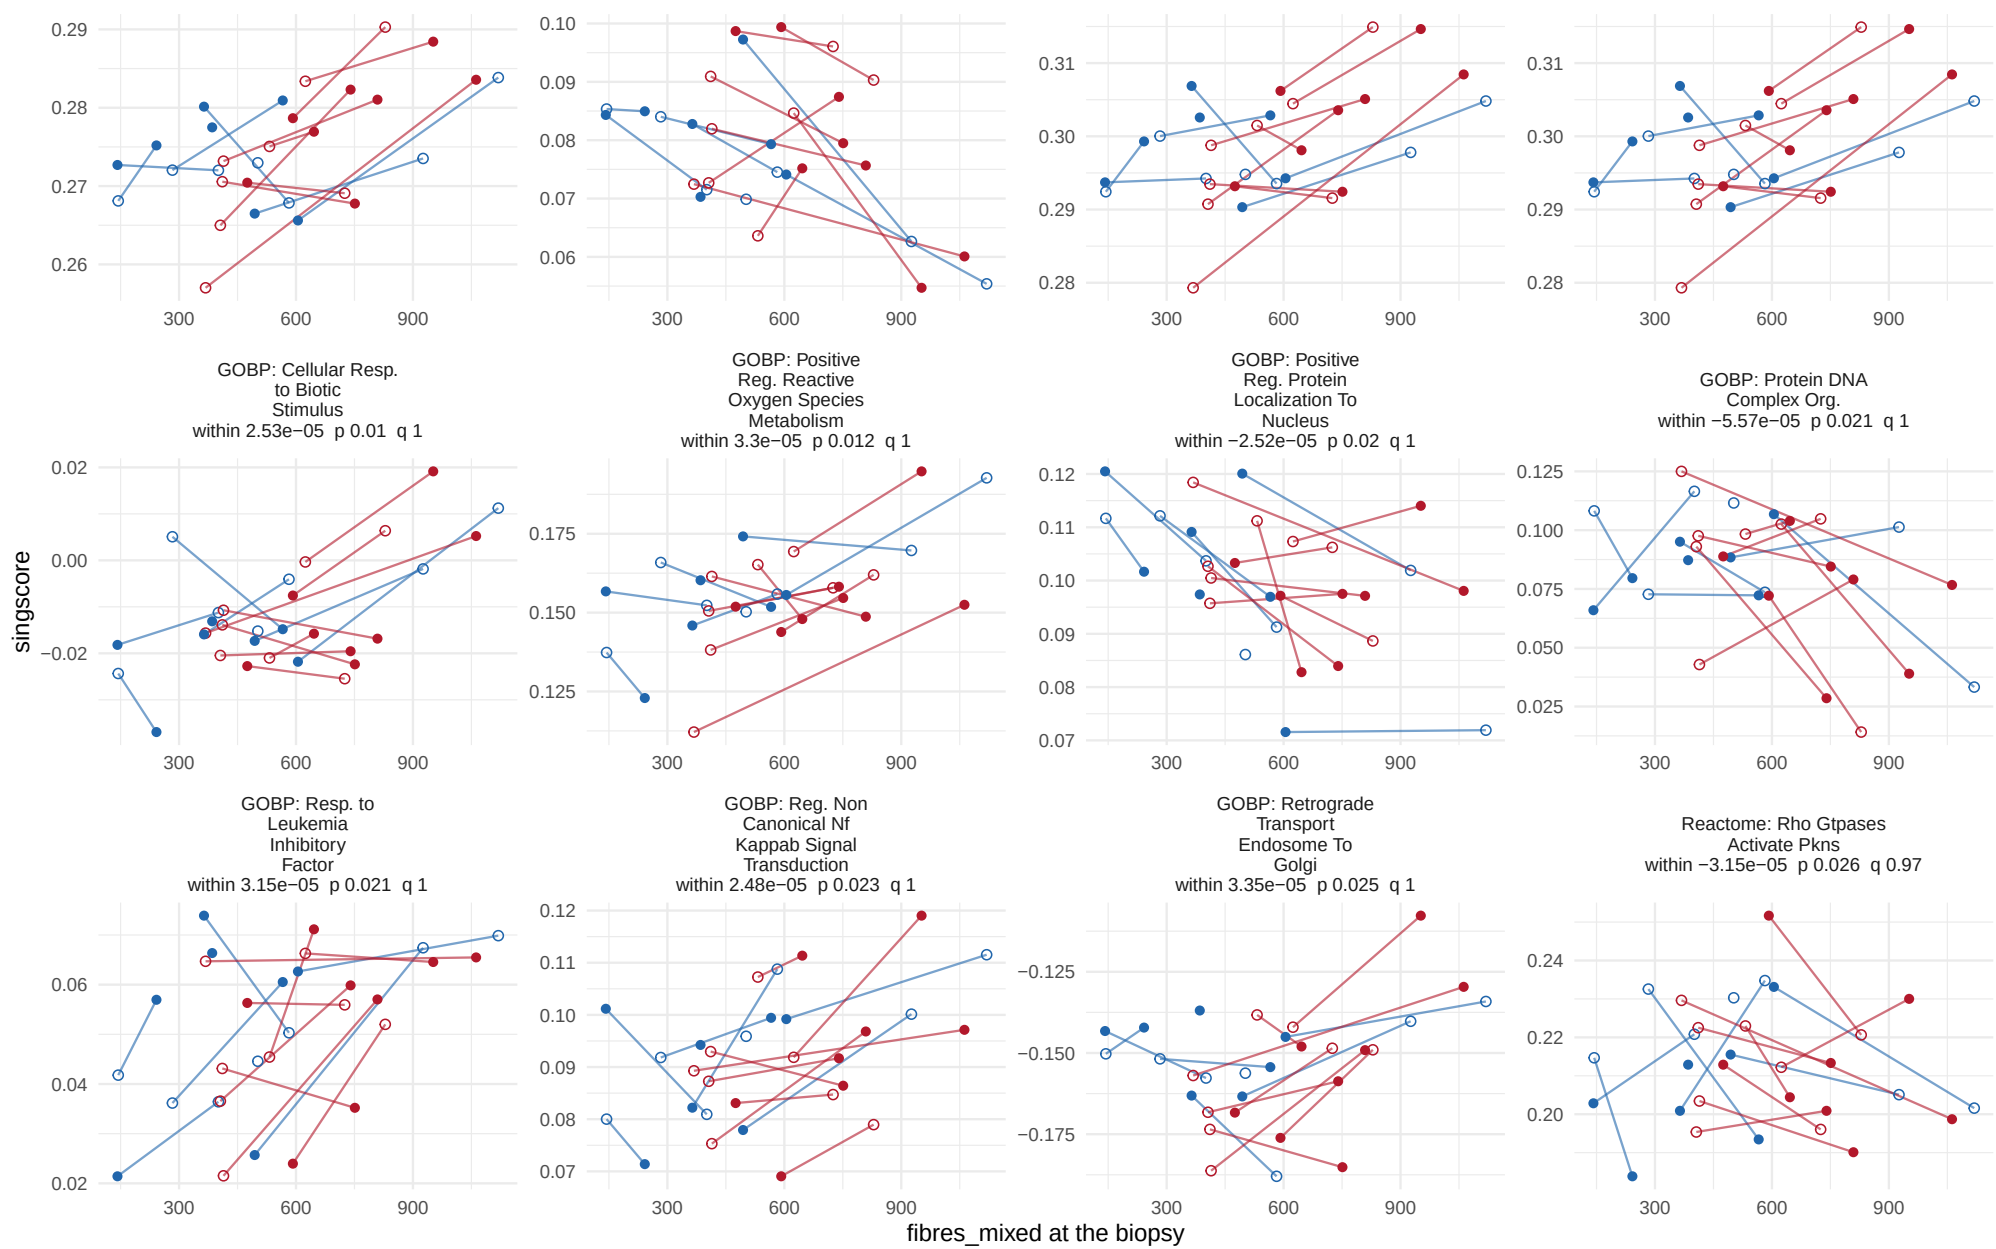

limma on 30 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

fibres_mixed, within−person term


25 of 1378 sets at p < 0.05, 0 at BH < 0.05.

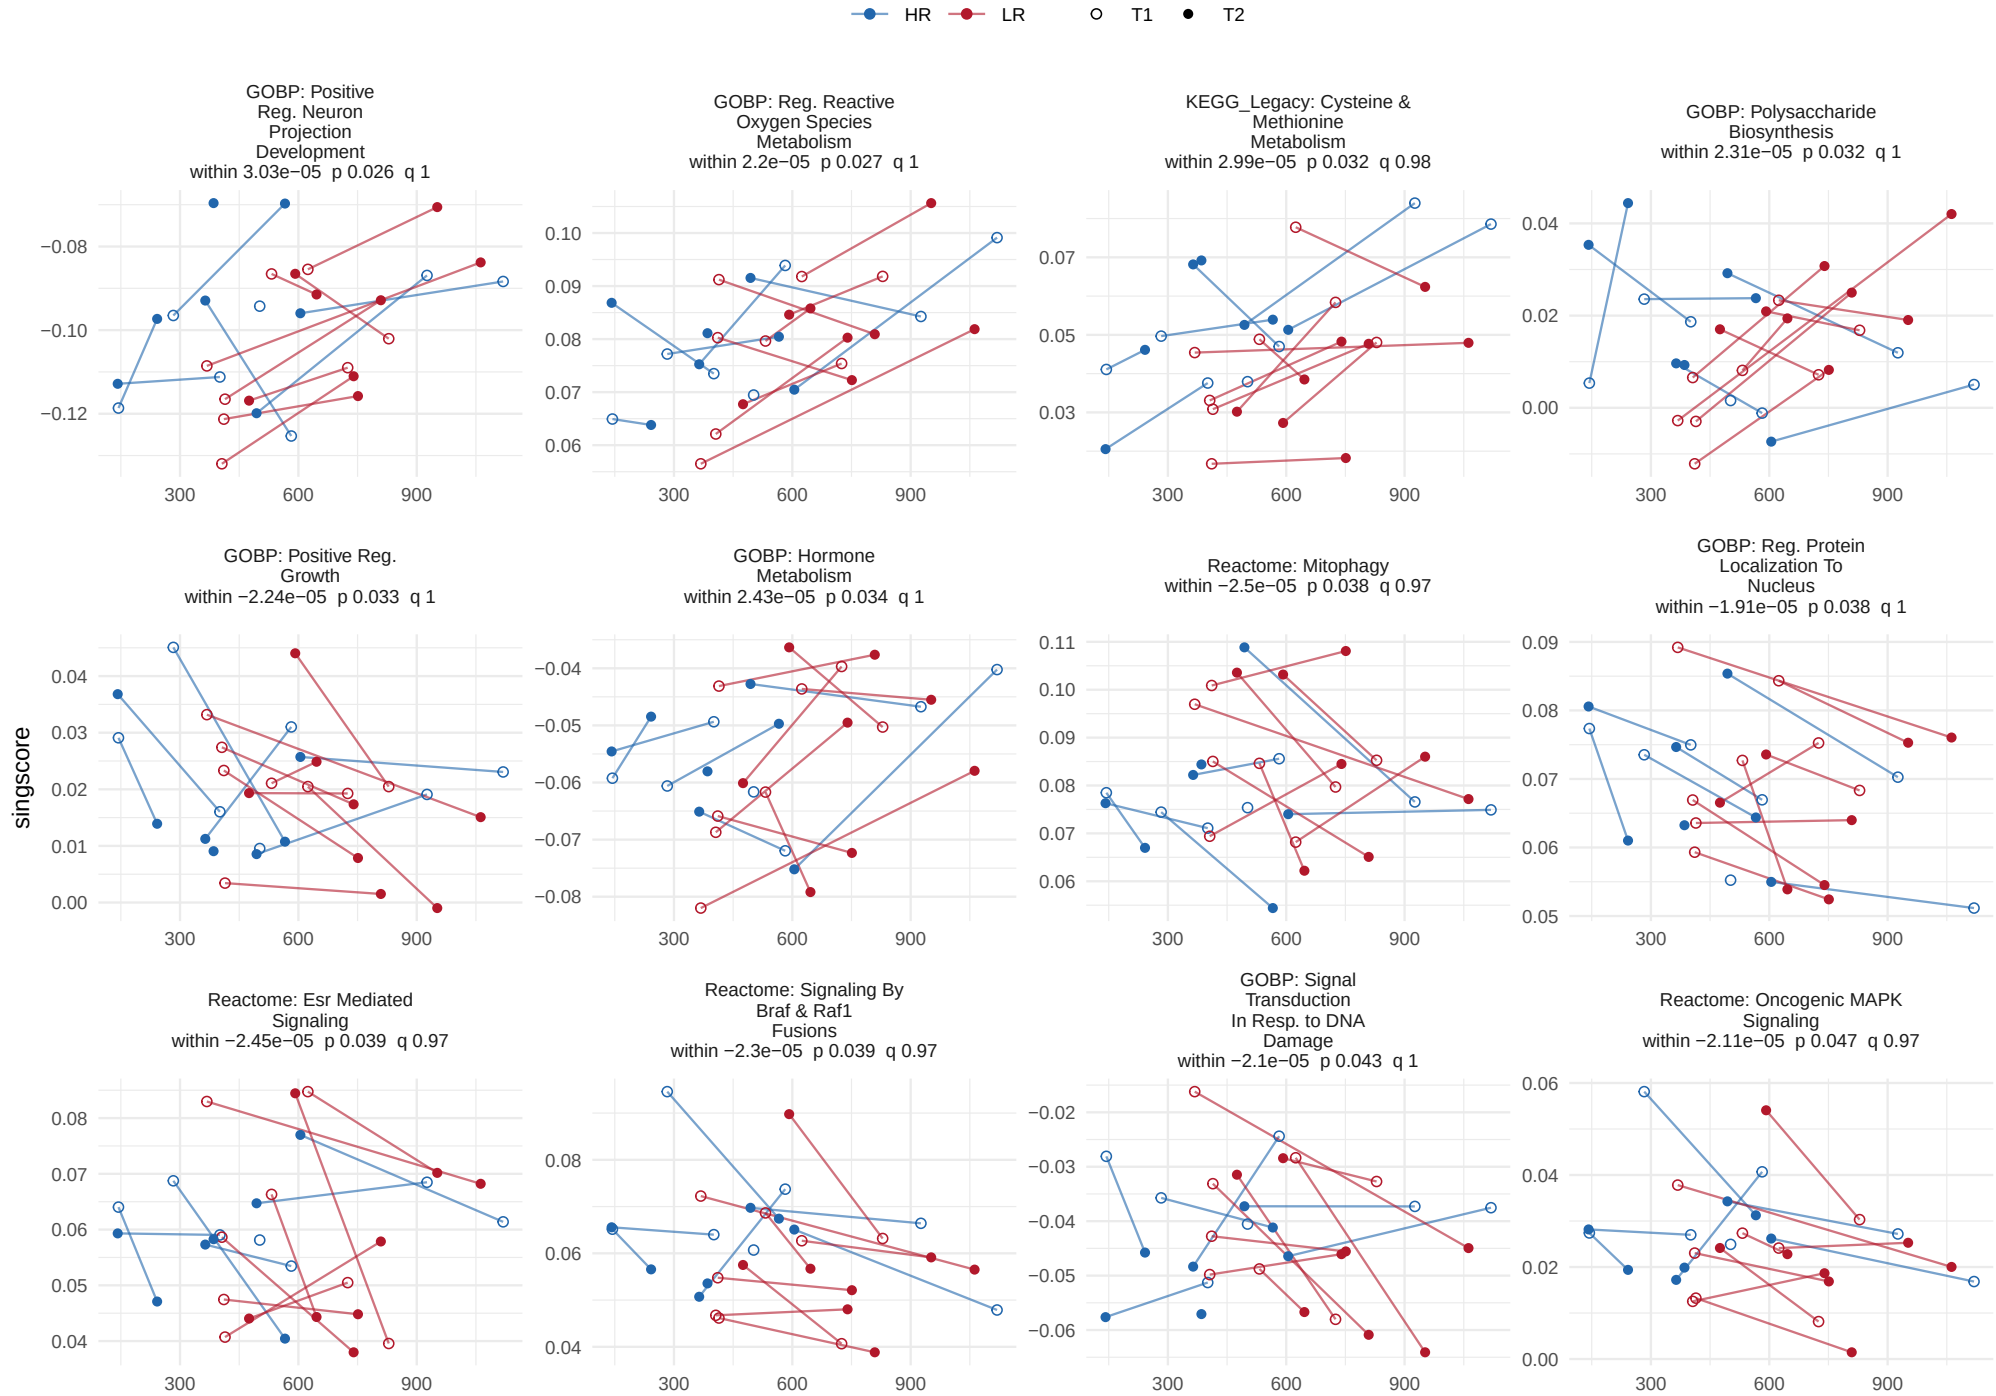

limma on 30 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

fibres_mixed, within−person term


25 of 1378 sets at p < 0.05, 0 at BH < 0.05.

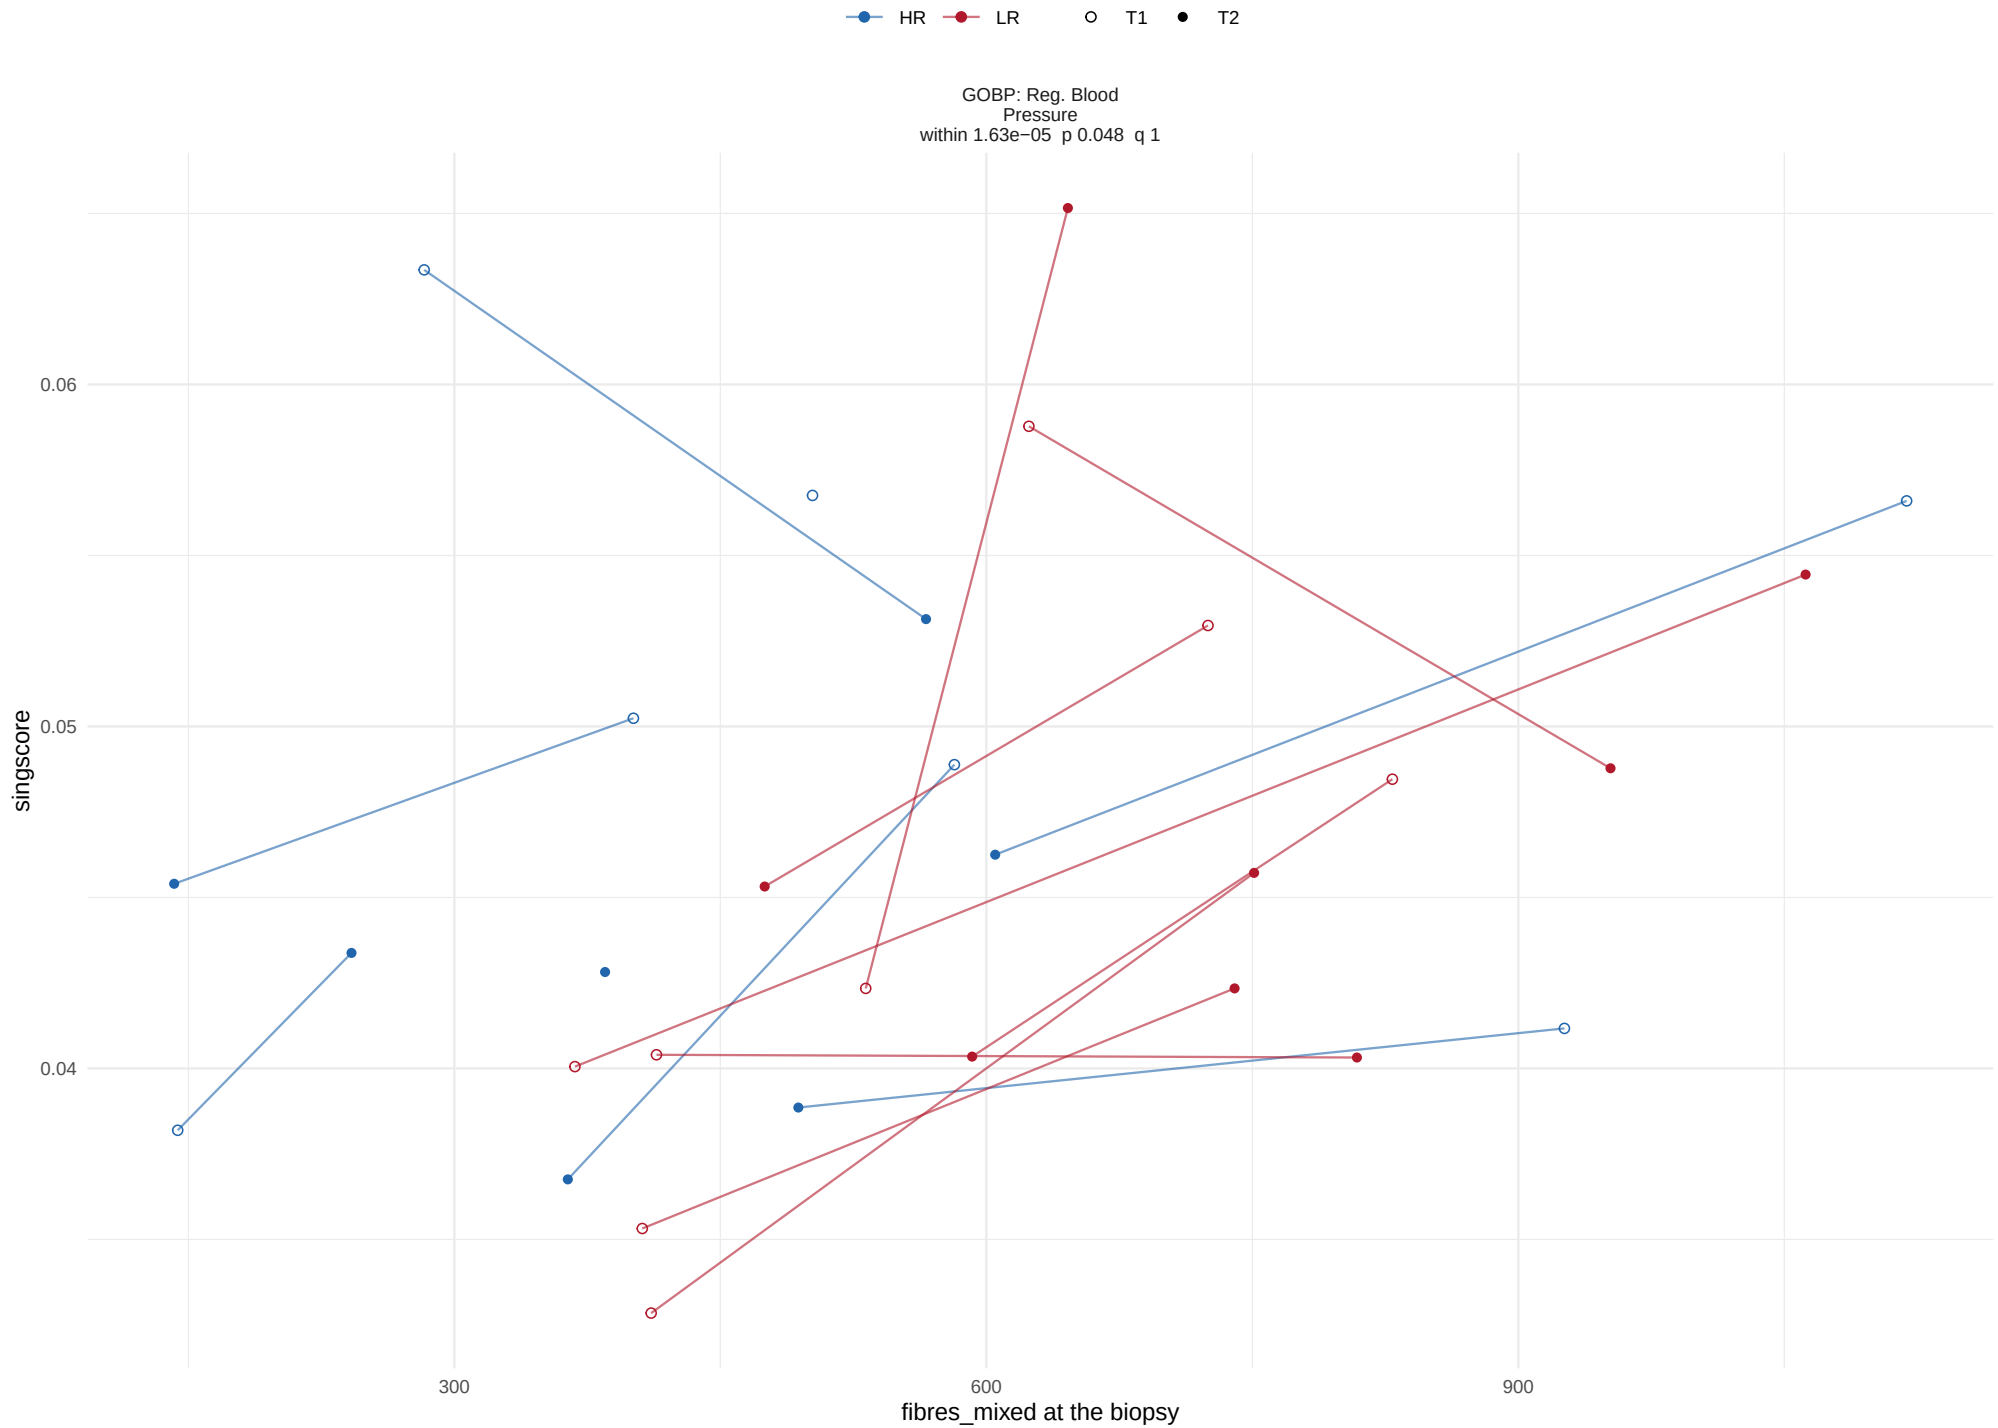

limma on 30 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

fibres_type1, between−person term


70 of 1378 sets at p < 0.05, 0 at BH < 0.05.

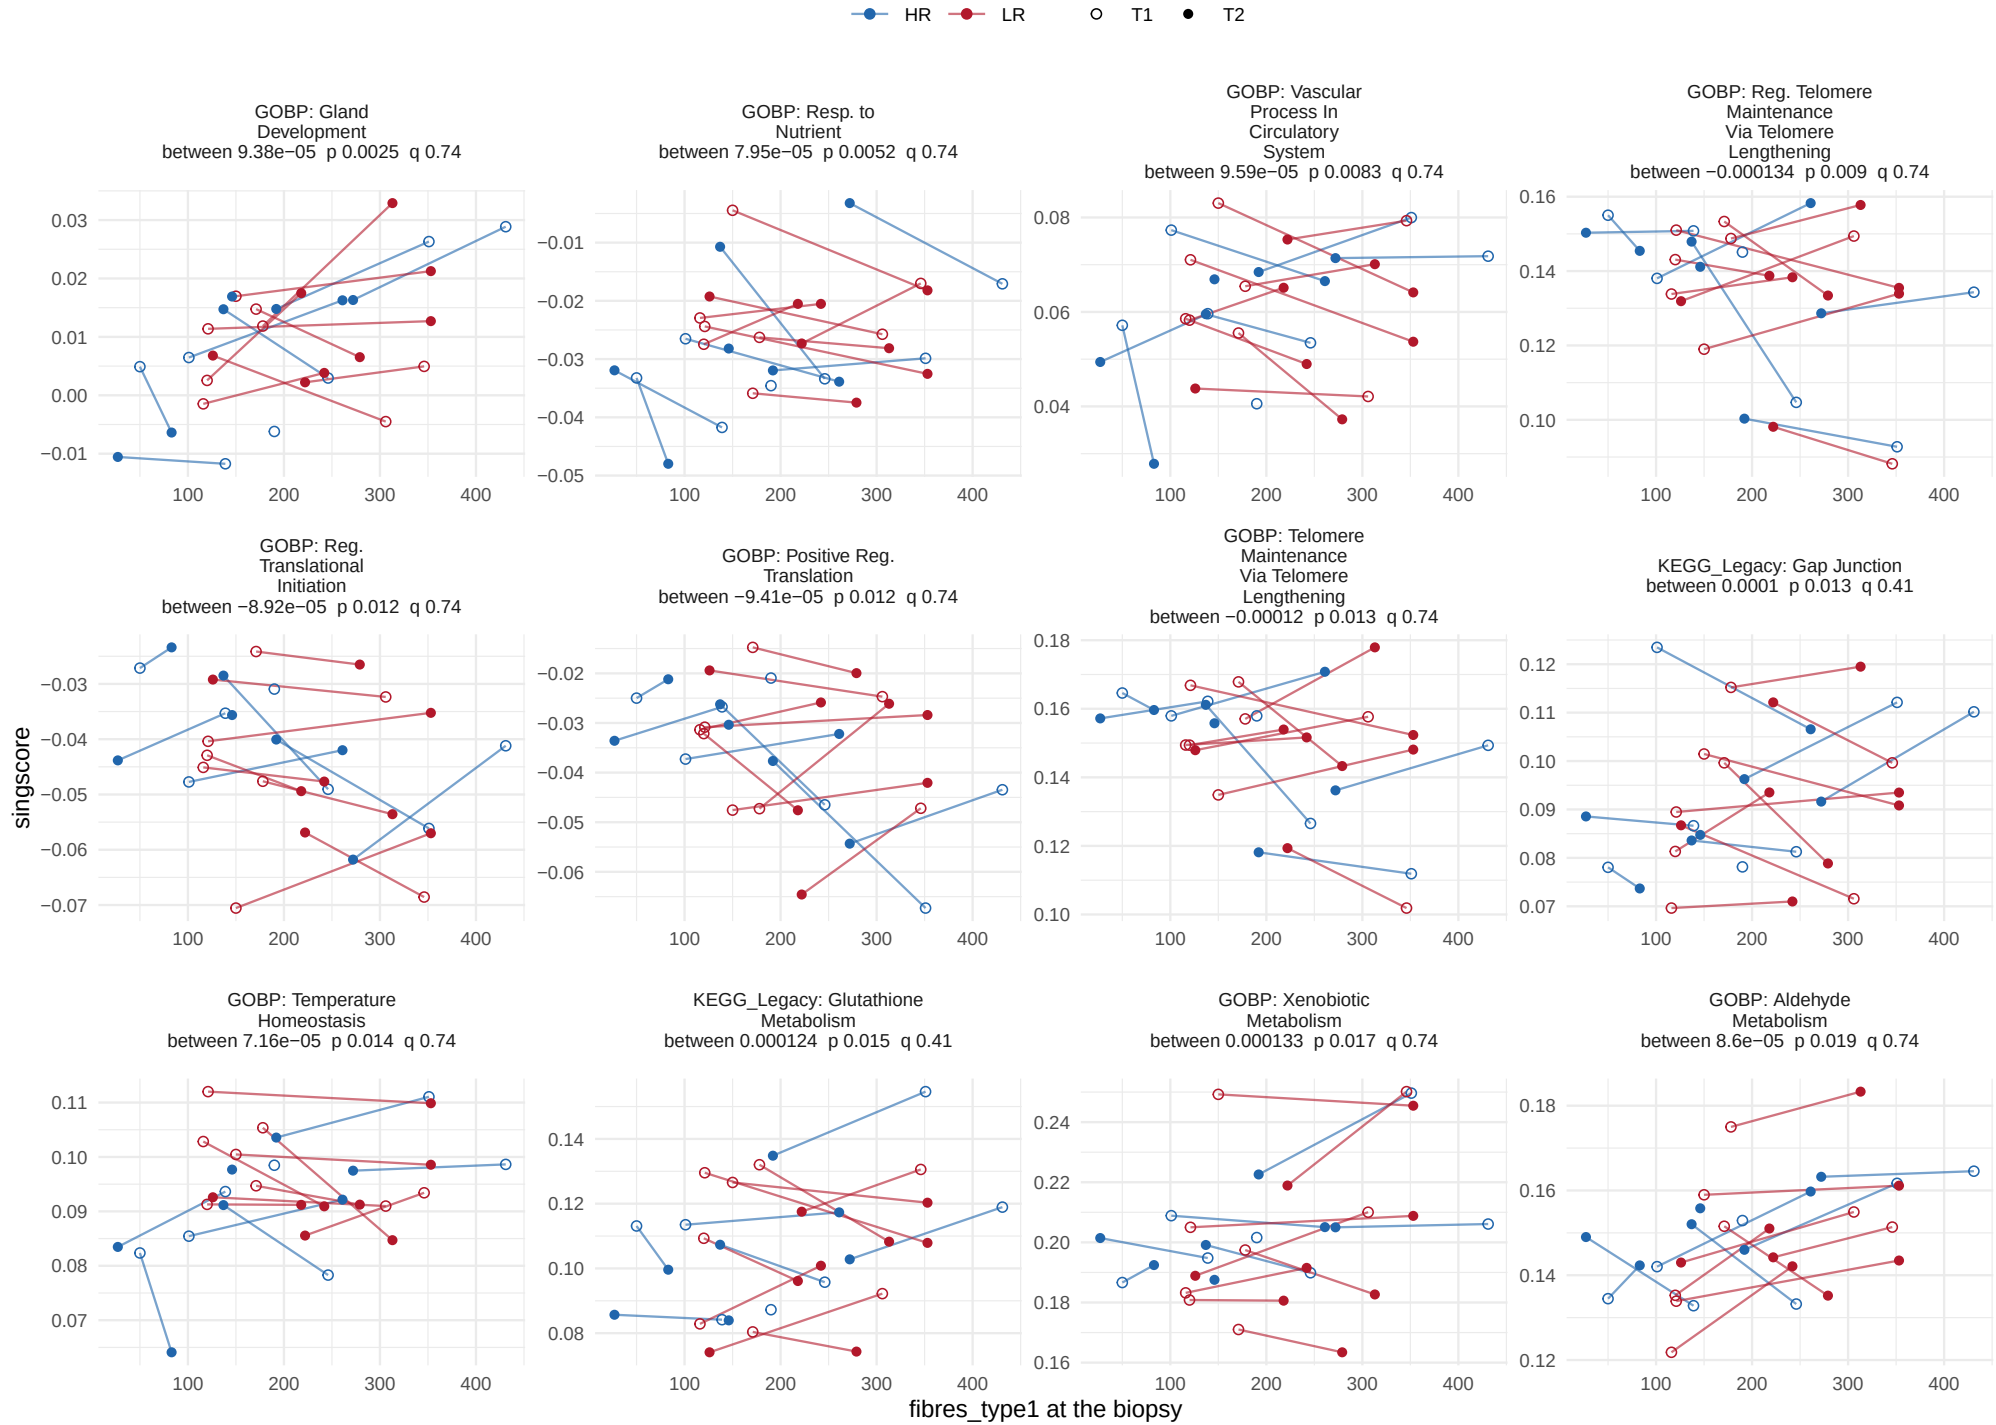

limma on 30 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

fibres_type1, between−person term


70 of 1378 sets at p < 0.05, 0 at BH < 0.05.

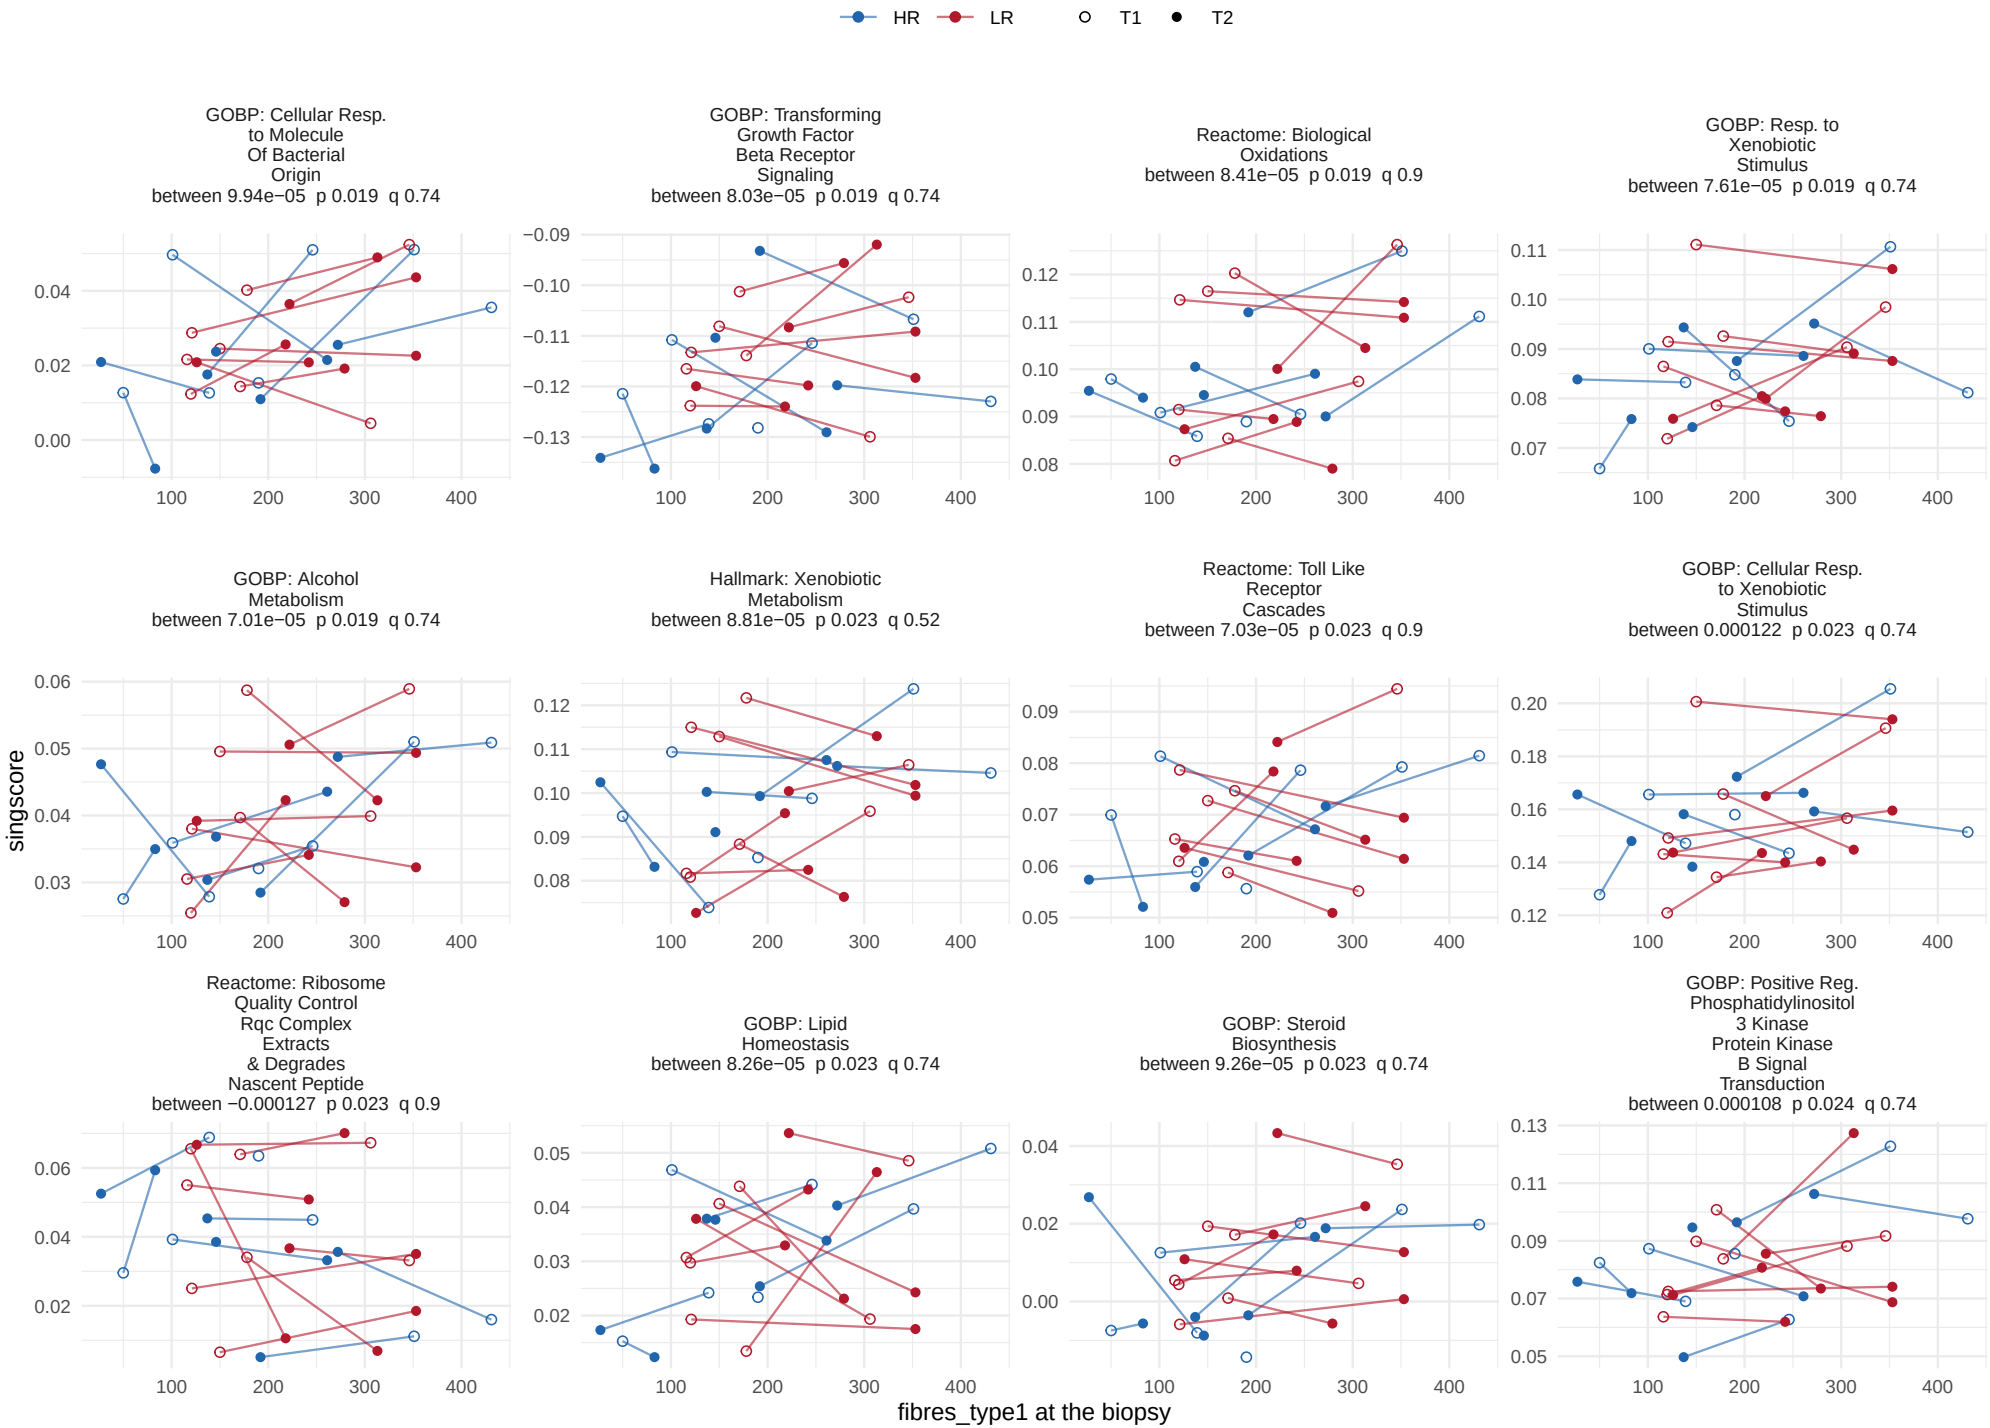

limma on 30 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

fibres_type1, between−person term


70 of 1378 sets at p < 0.05, 0 at BH < 0.05.

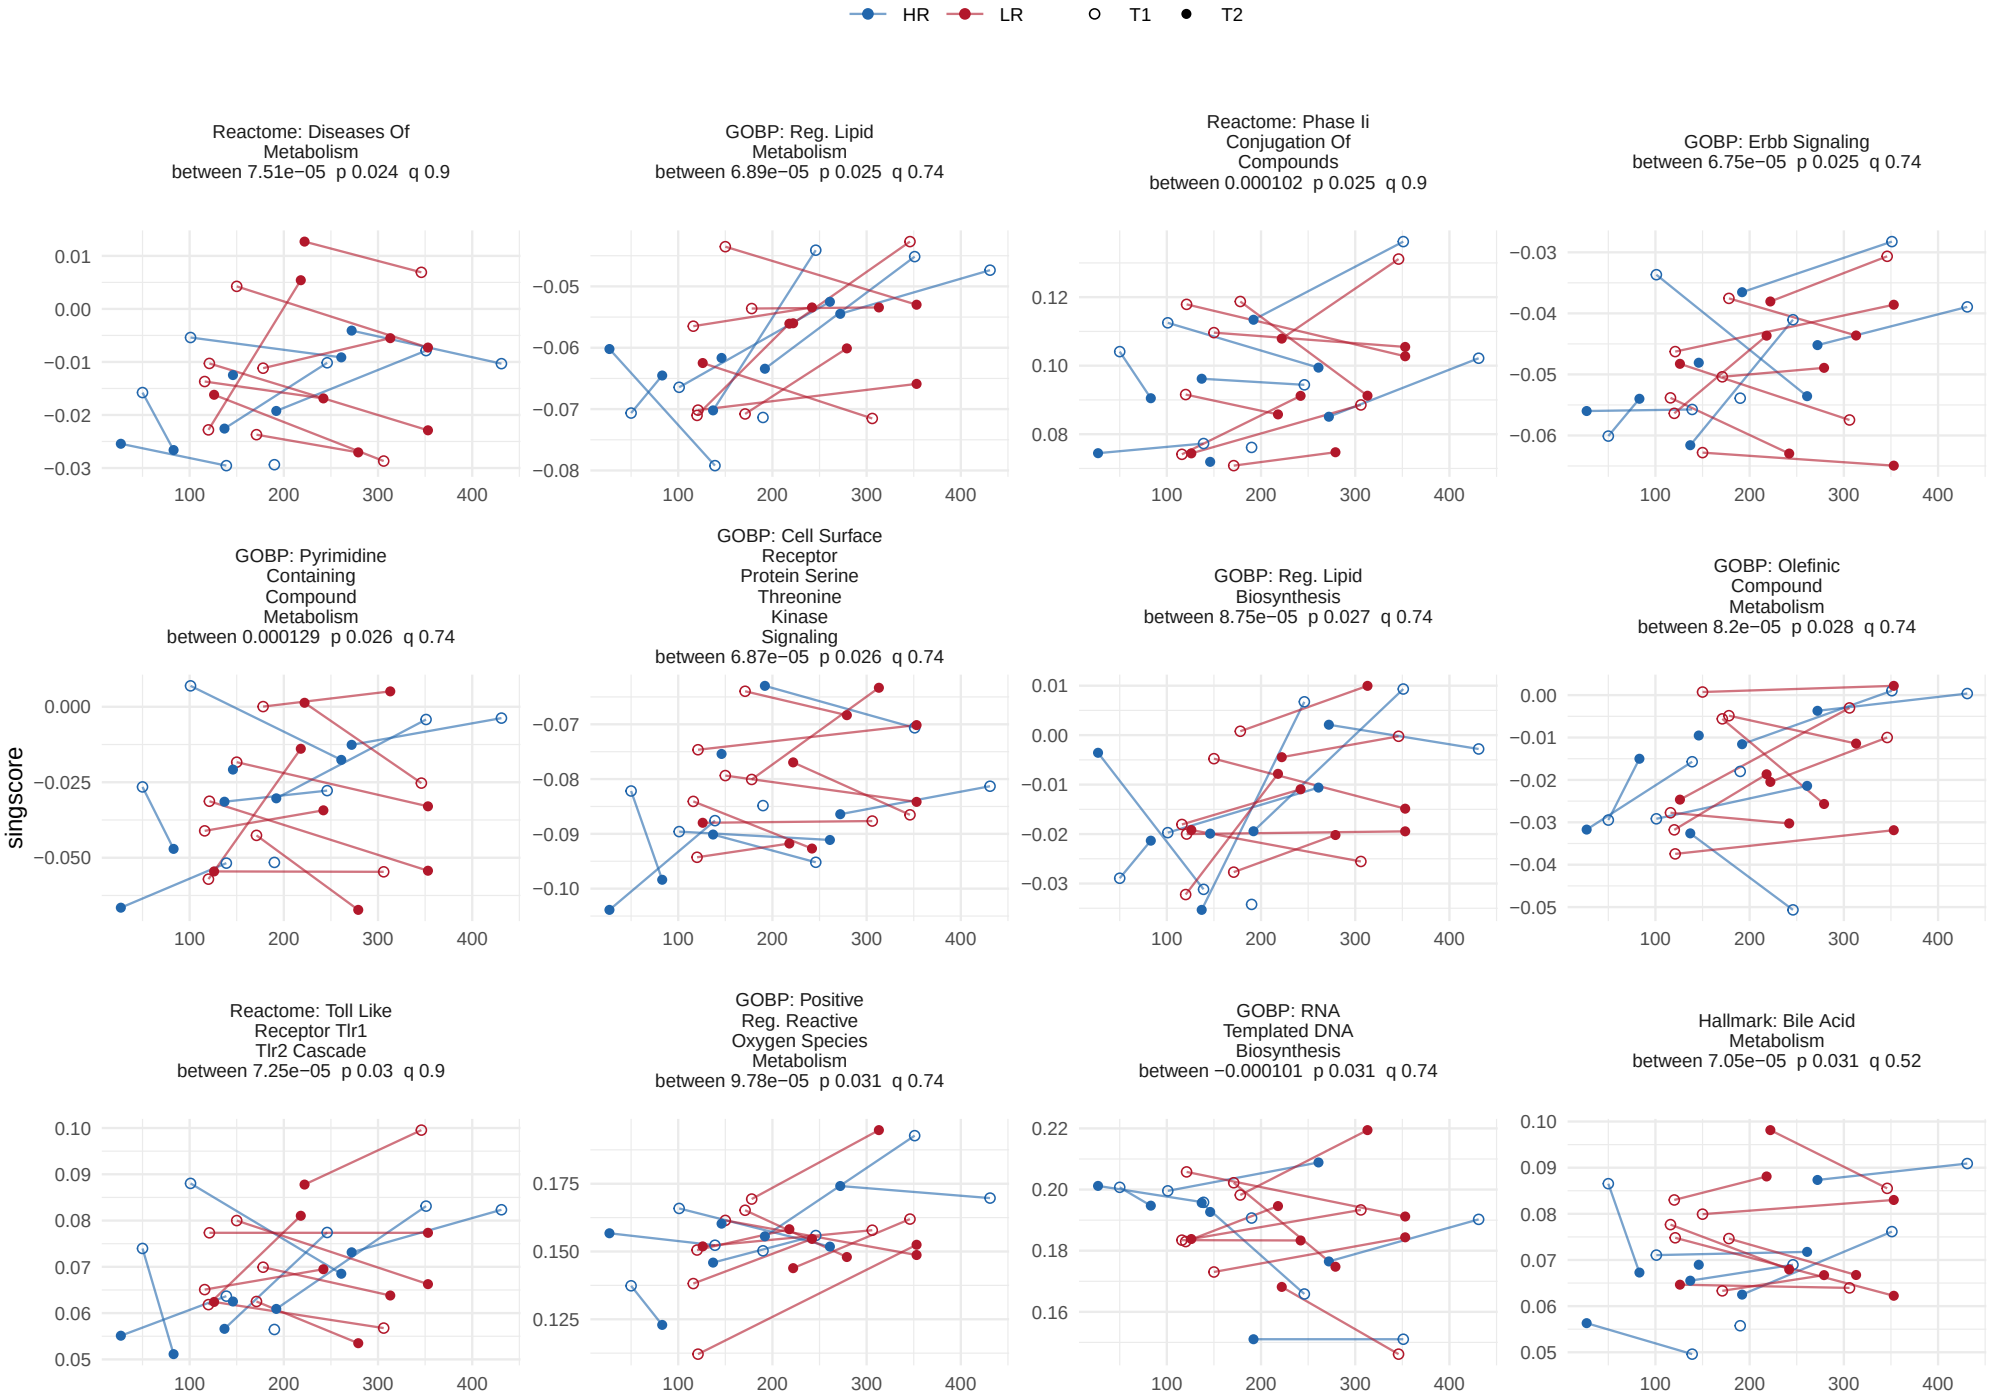

limma on 30 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

fibres_type1, between−person term


70 of 1378 sets at p < 0.05, 0 at BH < 0.05.

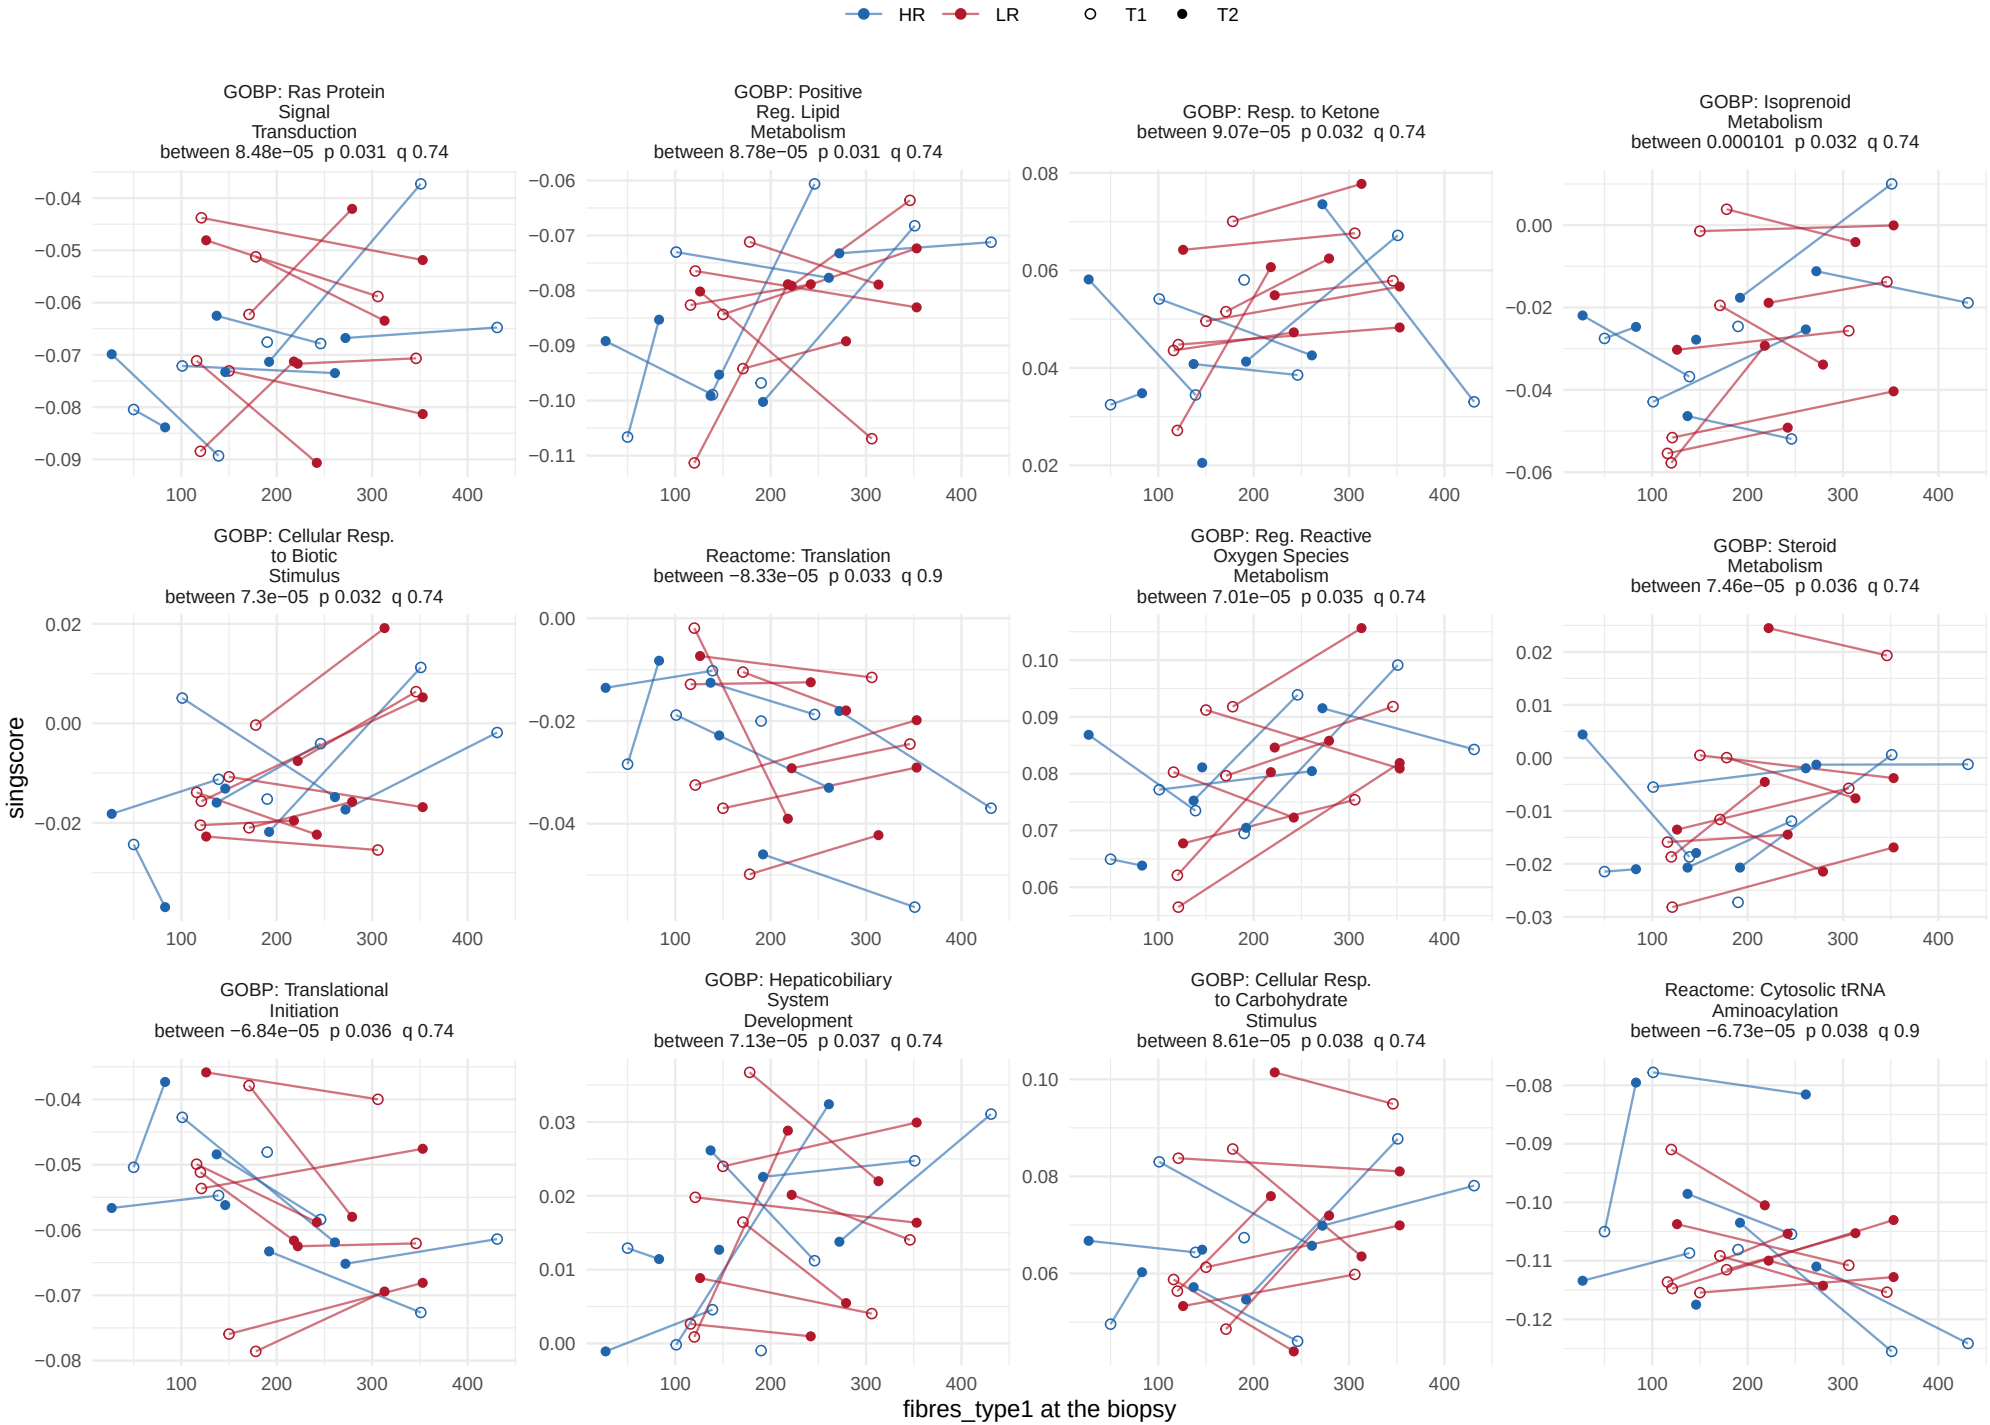

limma on 30 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

fibres_type1, between−person term


70 of 1378 sets at p < 0.05, 0 at BH < 0.05.

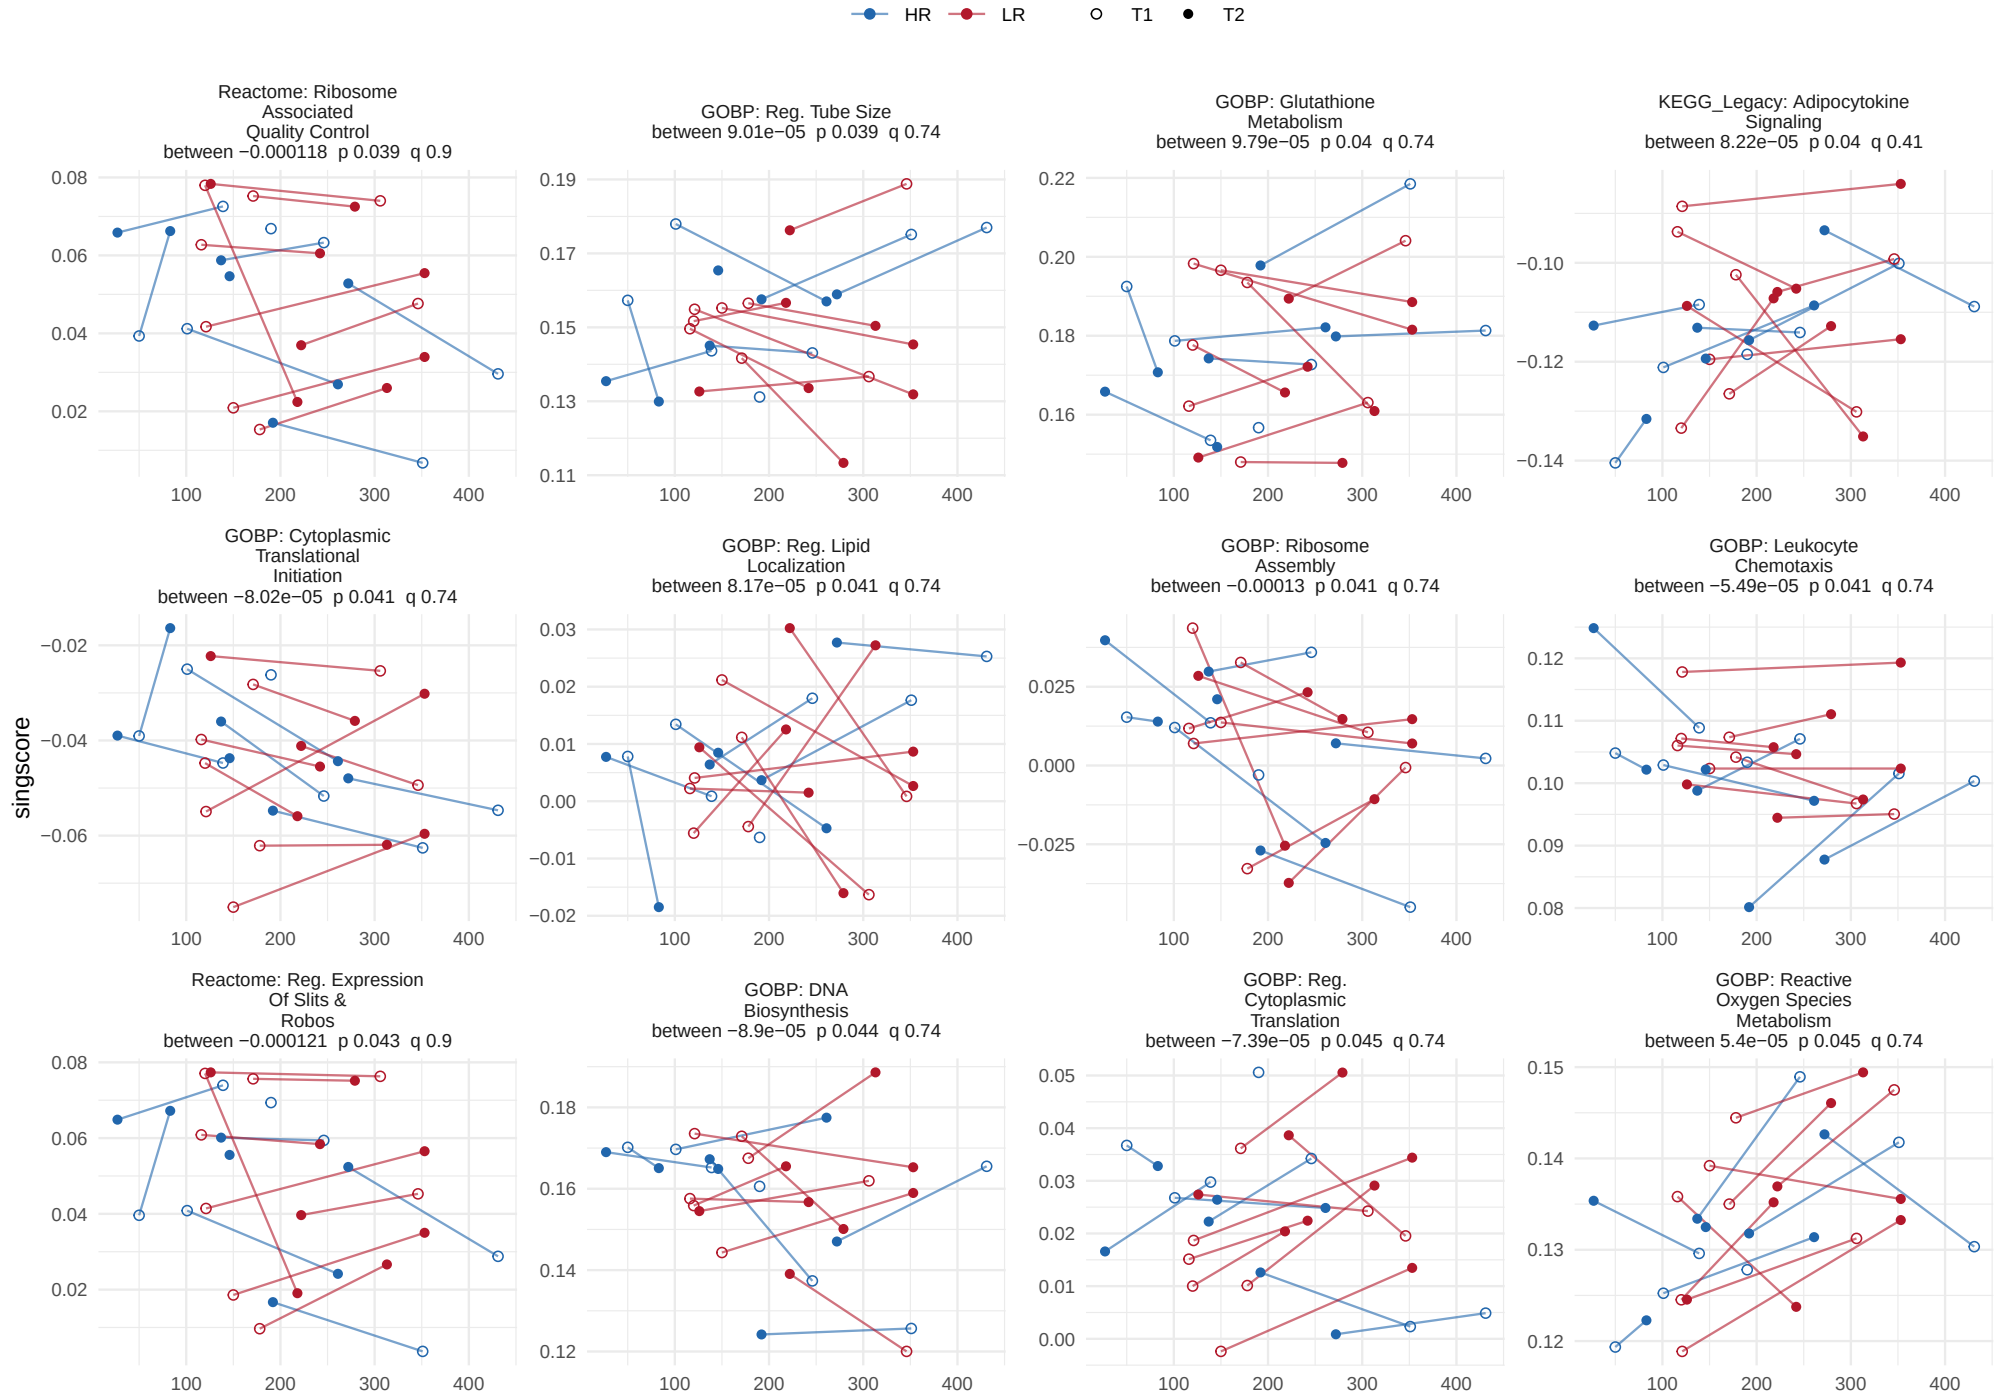

limma on 30 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

fibres_type1, between−person term


70 of 1378 sets at p < 0.05, 0 at BH < 0.05.

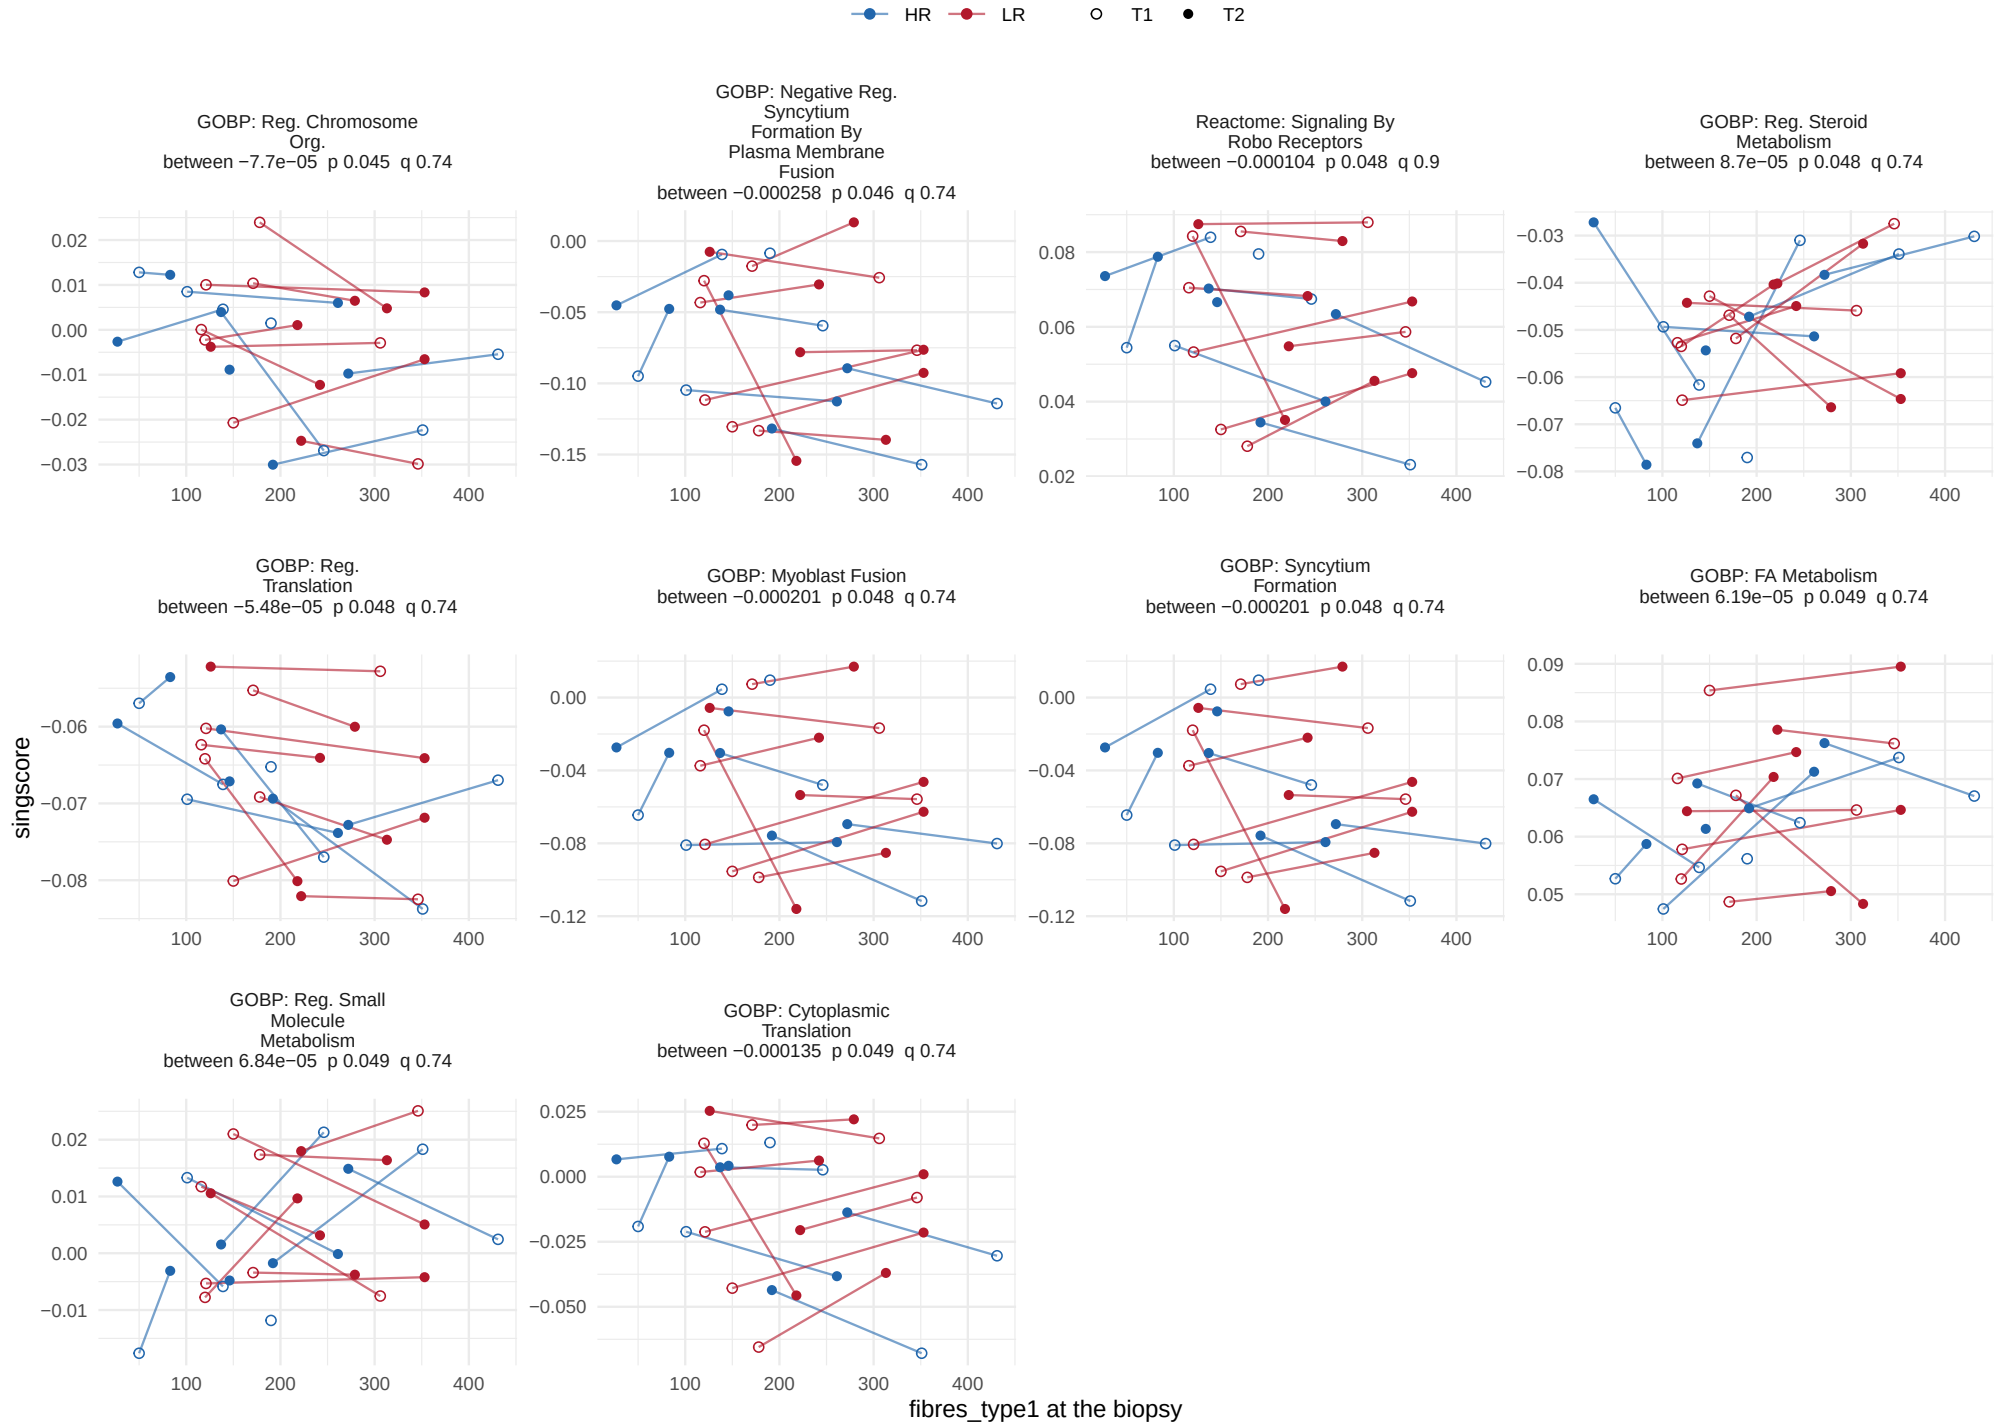

limma on 30 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

fibres_type1, within−person term


36 of 1378 sets at p < 0.05, 0 at BH < 0.05.

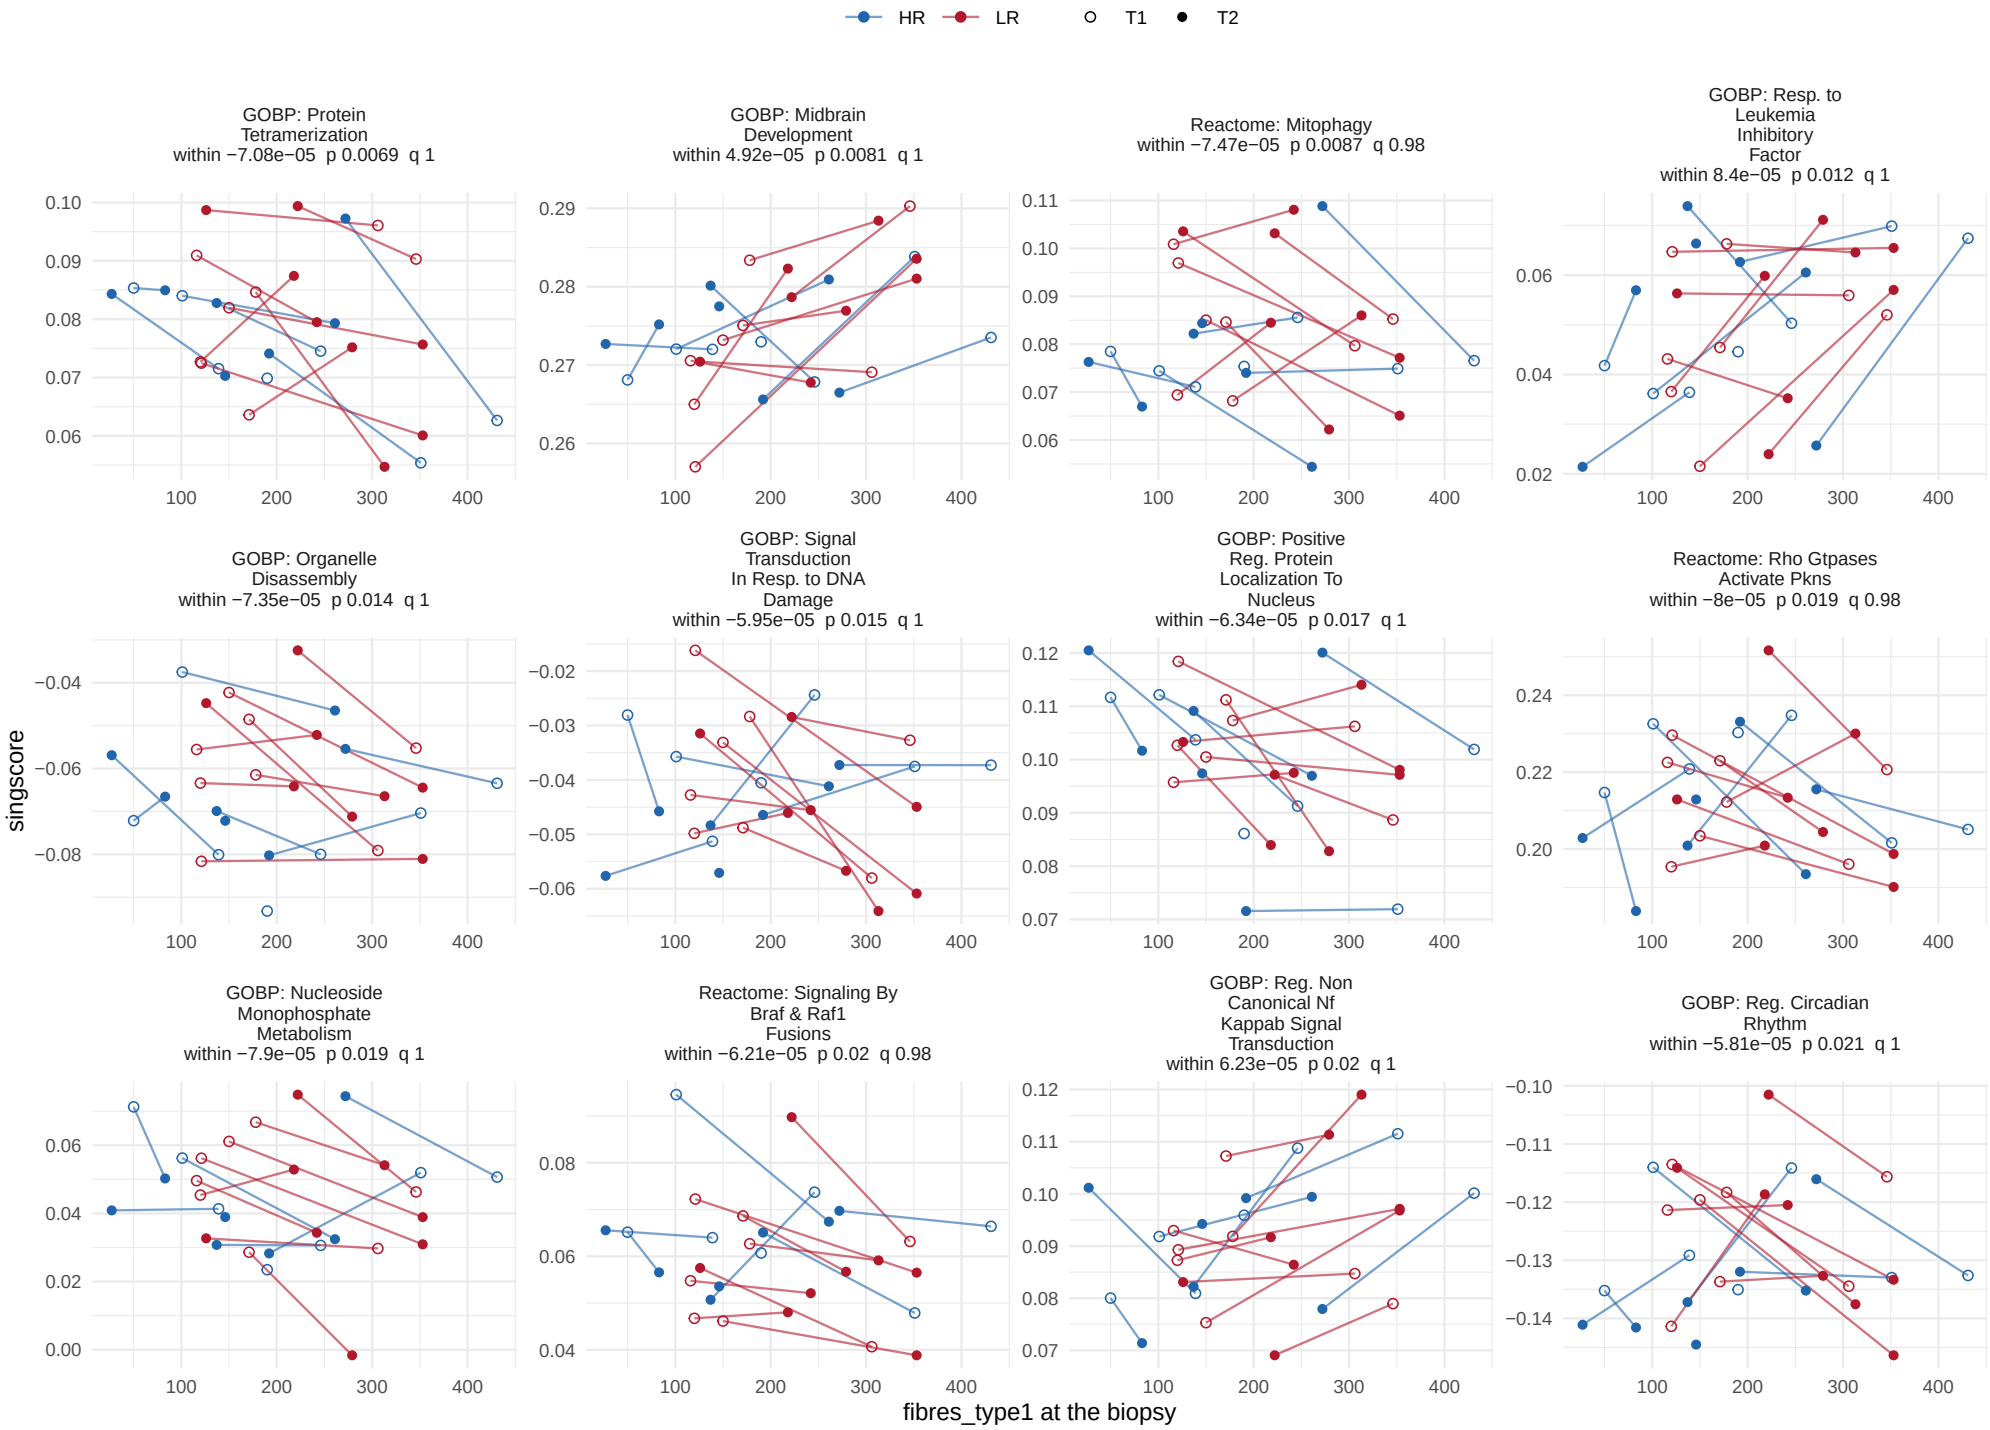

limma on 30 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

fibres_type1, within−person term


36 of 1378 sets at p < 0.05, 0 at BH < 0.05.

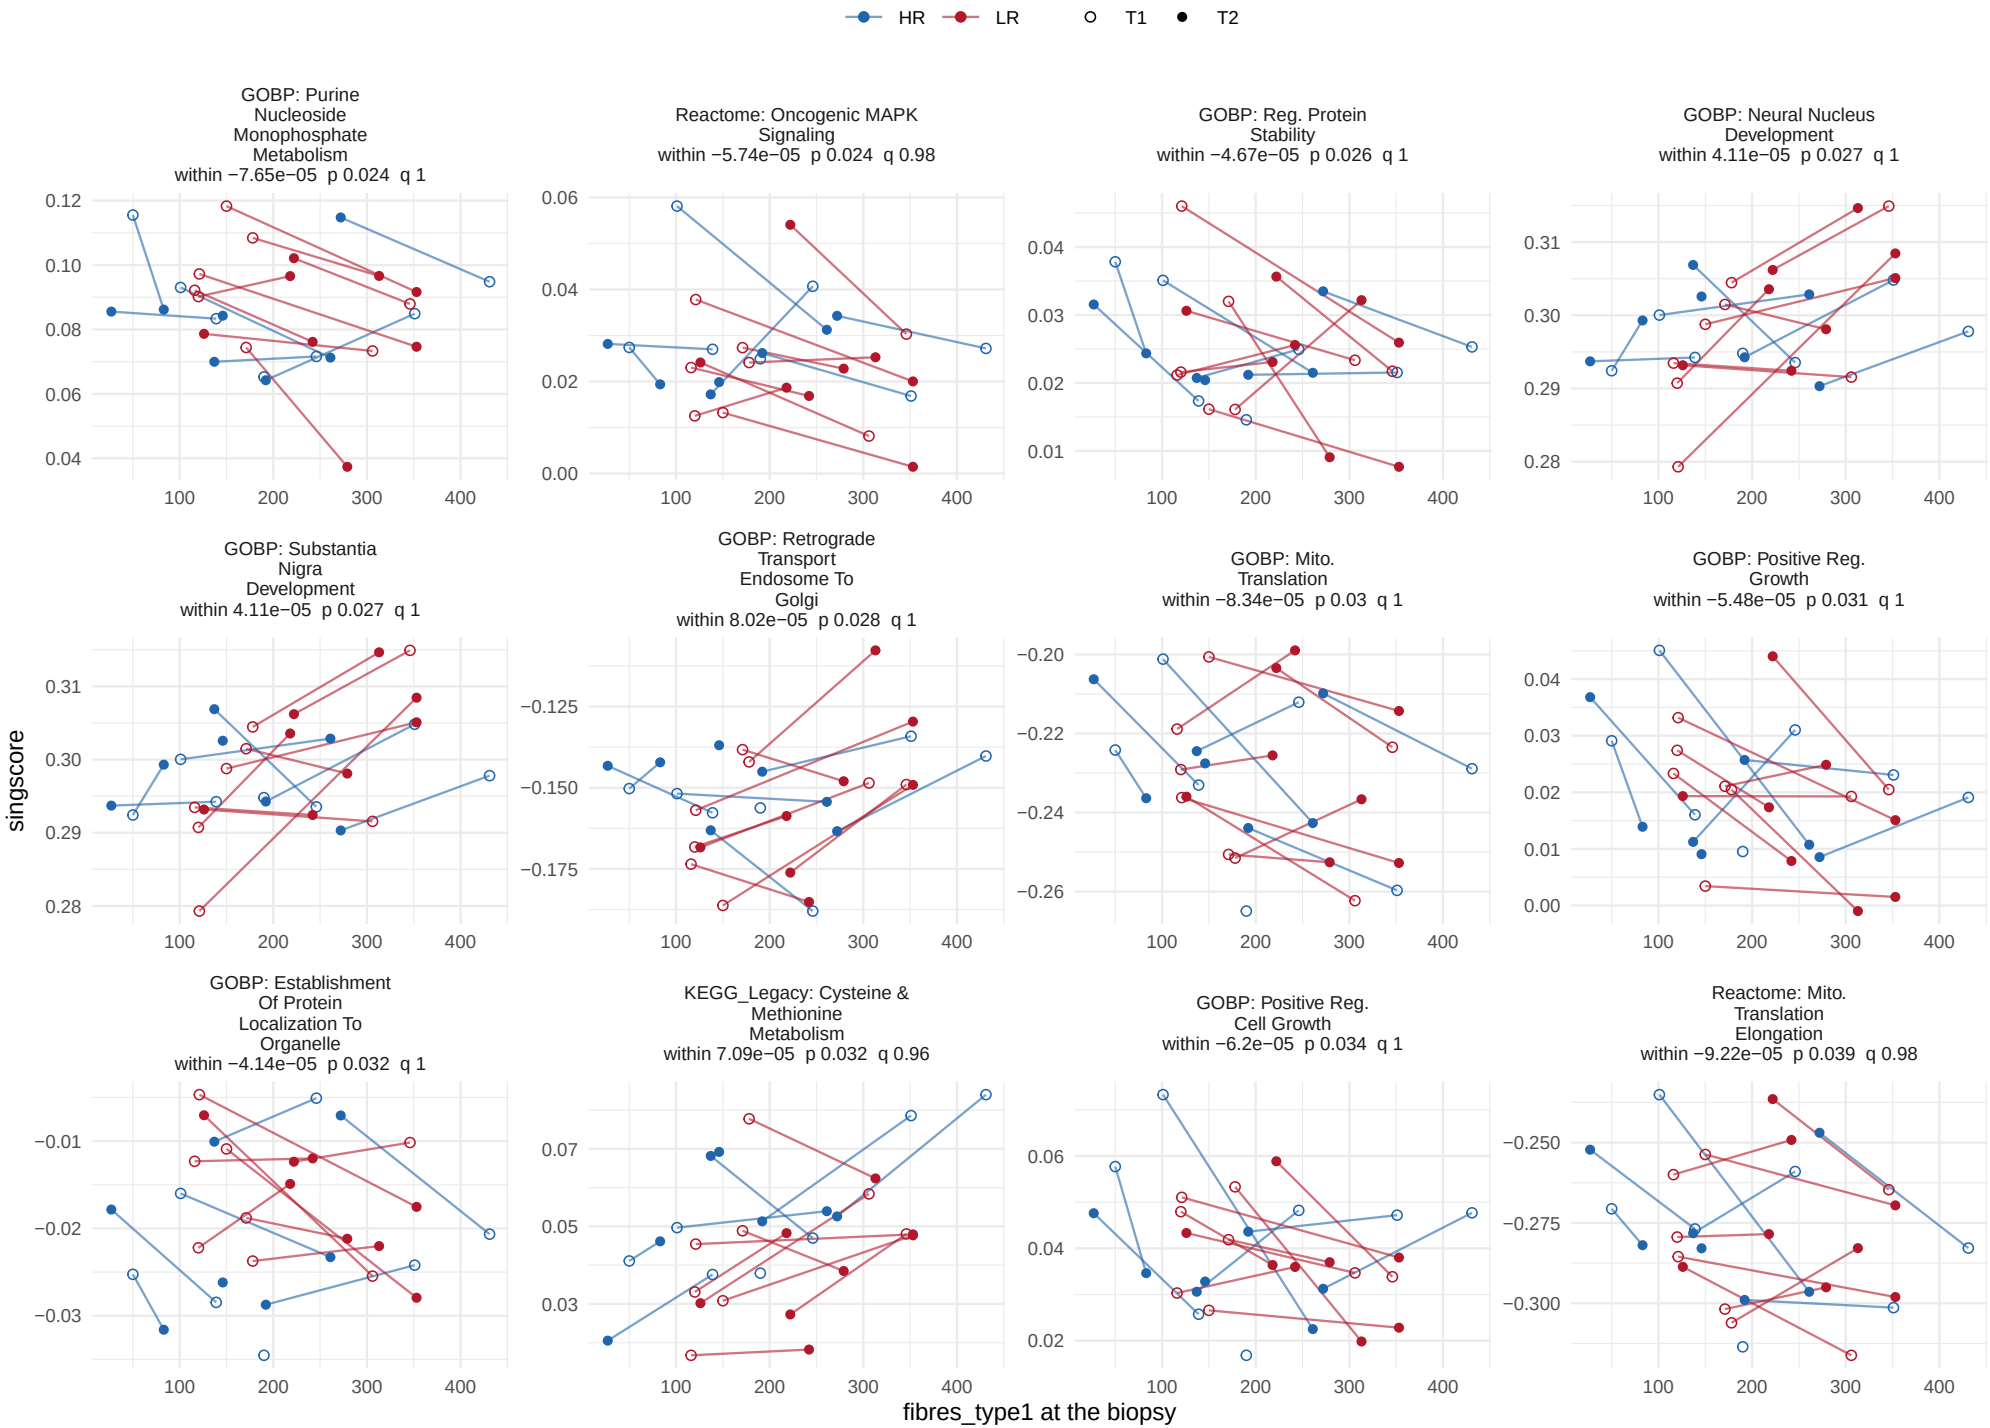

limma on 30 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

fibres_type1, within−person term


36 of 1378 sets at p < 0.05, 0 at BH < 0.05.

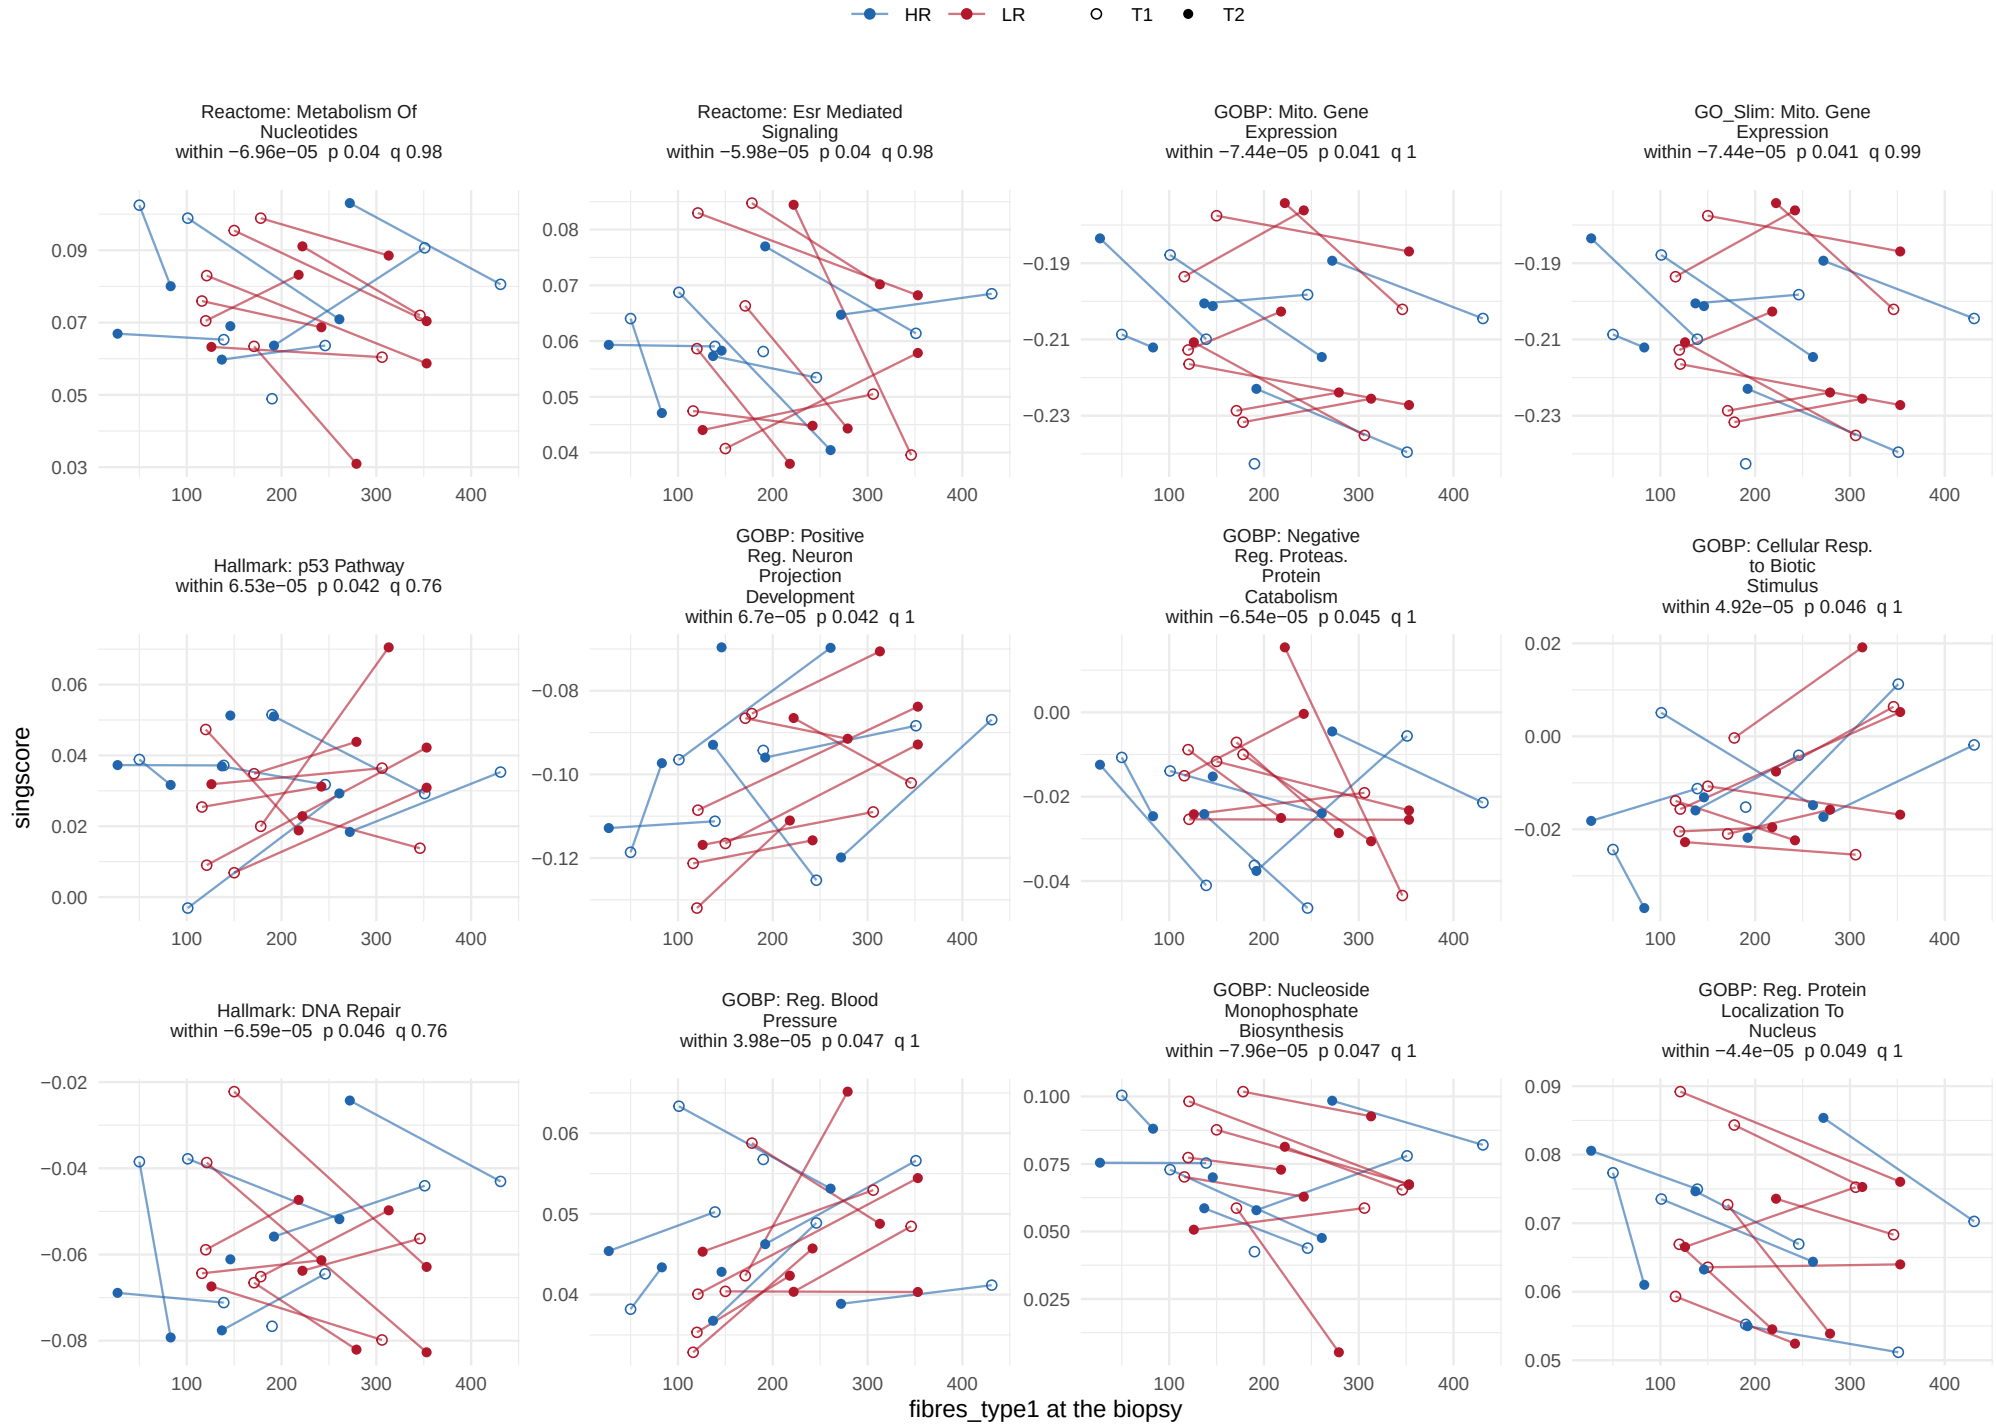

limma on 30 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

leg_ext_1rm, between−person term

60 of 1378 sets at p < 0.05, 0 at BH < 0.05.

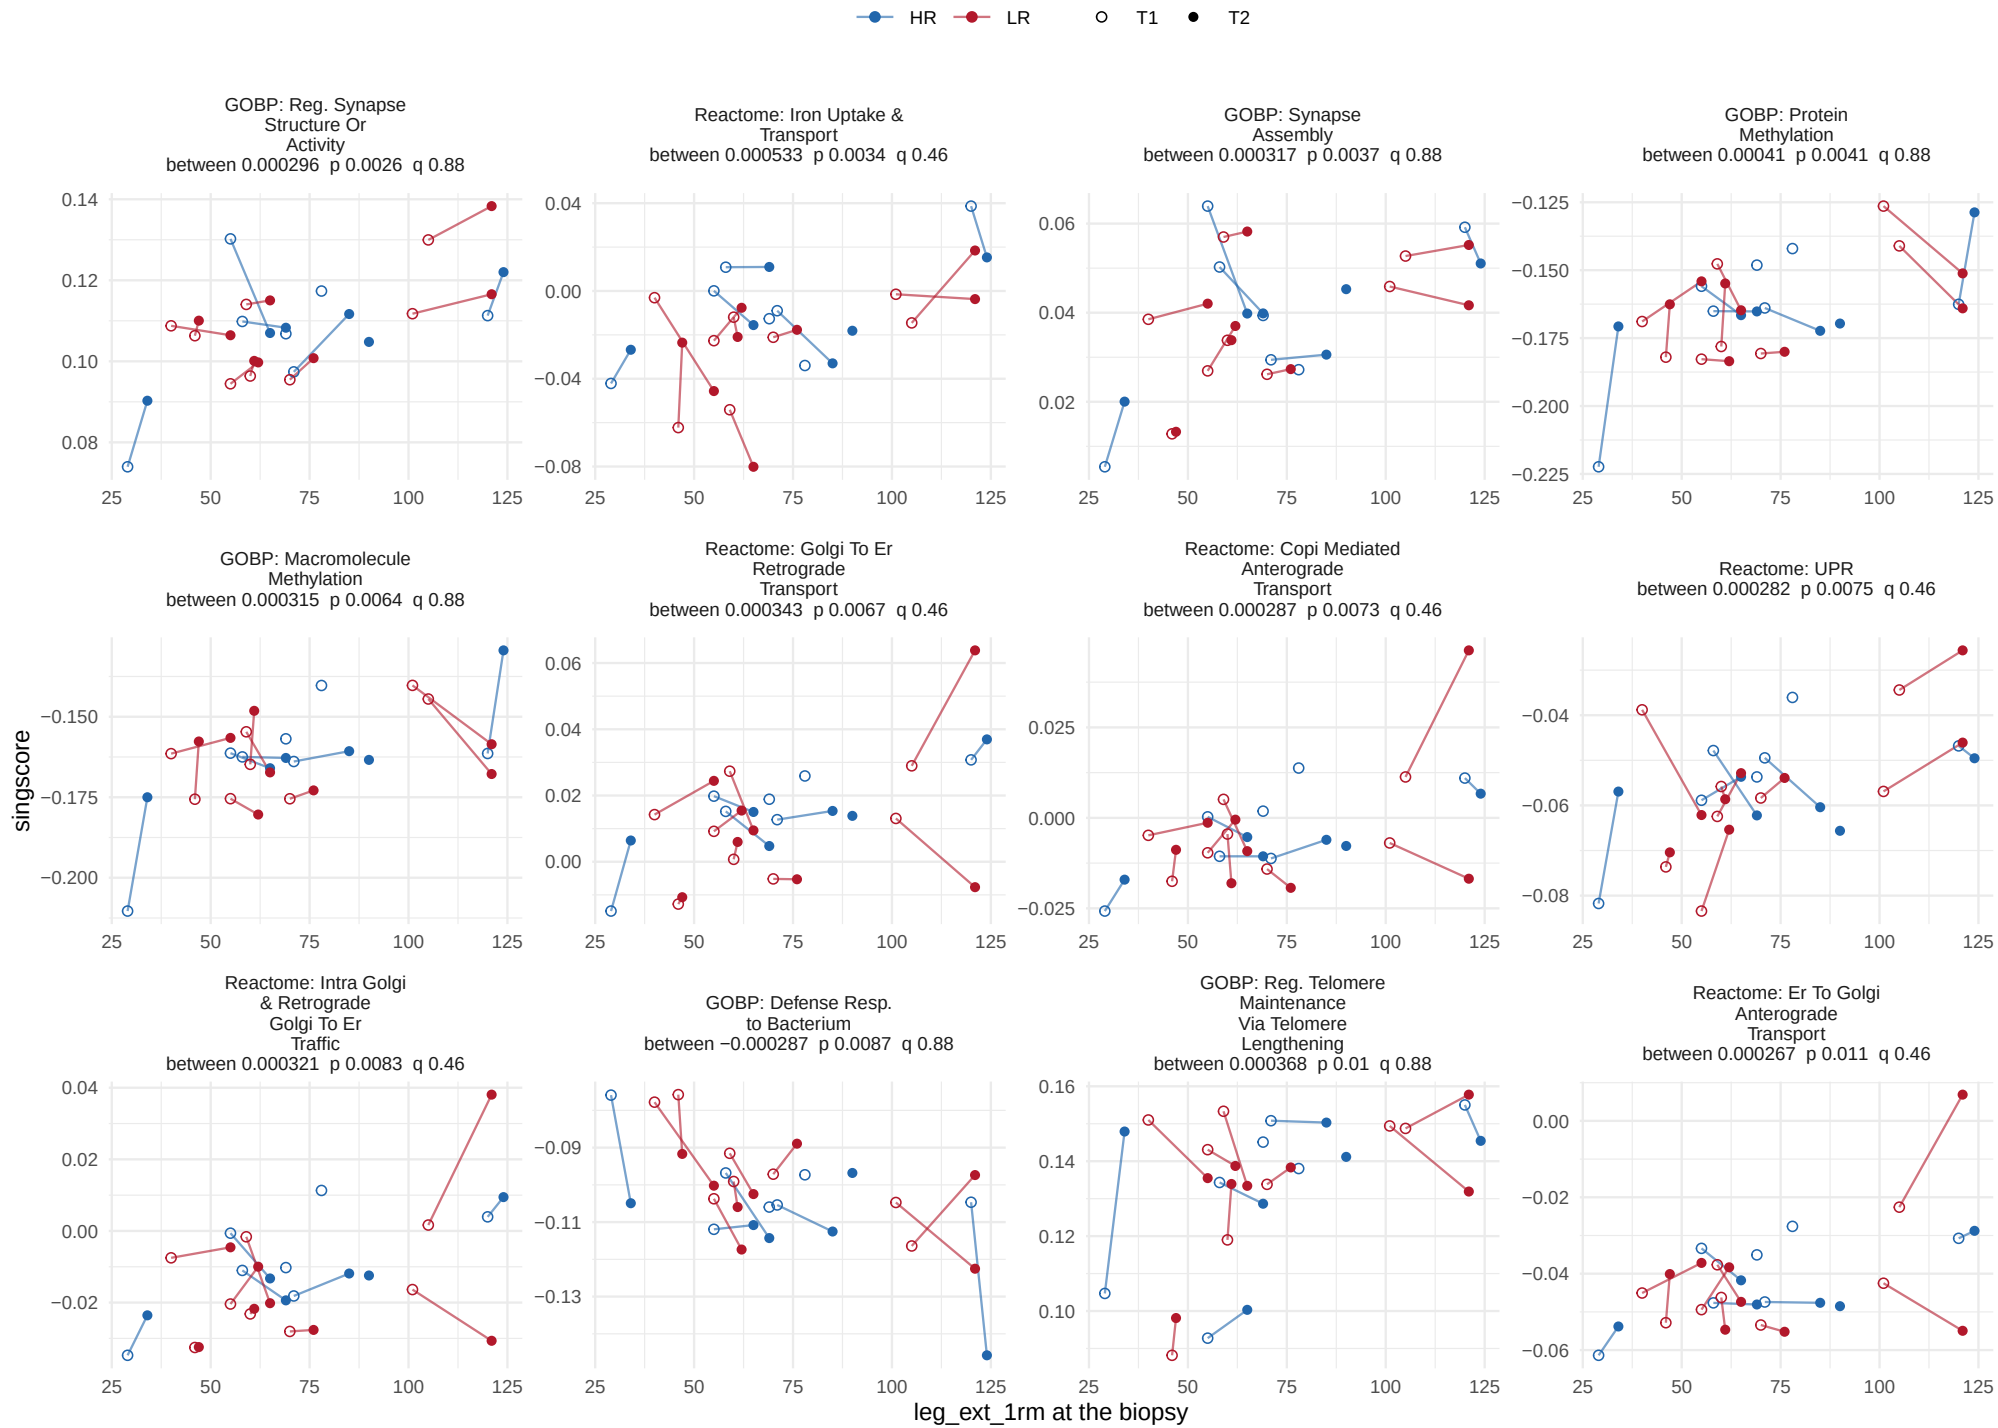

limma on 29 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

leg_ext_1rm, between−person term

60 of 1378 sets at p < 0.05, 0 at BH < 0.05.

HR LR T1 T2

Reactome: Transport To The Golgi & Subsequent Mod.
between 0.000267 p 0.011 q 0.46

GOBP: Methylation
between 0.000255 p 0.012 q 0.88

GOBP: FA Transport
between −0.00028 p 0.013 q 0.88

Reactome: Mhc Class Ii Antigen Presentation
between 0.000278 p 0.013 q 0.46

GOBP: Positive Reg. Chromosome Org.
between 0.000352 p 0.013 q 0.88

KEGG_Legacy: Drug Metabolism Cytochrome P450
between −0.000458 p 0.014 q 0.58

GOBP: Positive Reg. Telomere Maintenance
between 0.000355 p 0.014 q 0.88

GOBP: Telomere Maintenance Via Telomere Lengthening
between 0.000323 p 0.017 q 0.88

GOBP: Negative Reg. Kinase Activity
between 0.000259 p 0.018 q 0.88

KEGG_Legacy: Adipocytokine Signaling
between −0.00027 p 0.019 q 0.58

GOBP: Reg. MT Polymerization
between 0.000244 p 0.019 q 0.88

Reactome: Formation Of Tubulin Folding Intermediates By Cct Tric
between 0.000353 p 0.019 q 0.46


singscore

leg_ext_1rm at the biopsy

limma on 29 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

leg_ext_1rm, between−person term


60 of 1378 sets at p < 0.05, 0 at BH < 0.05.

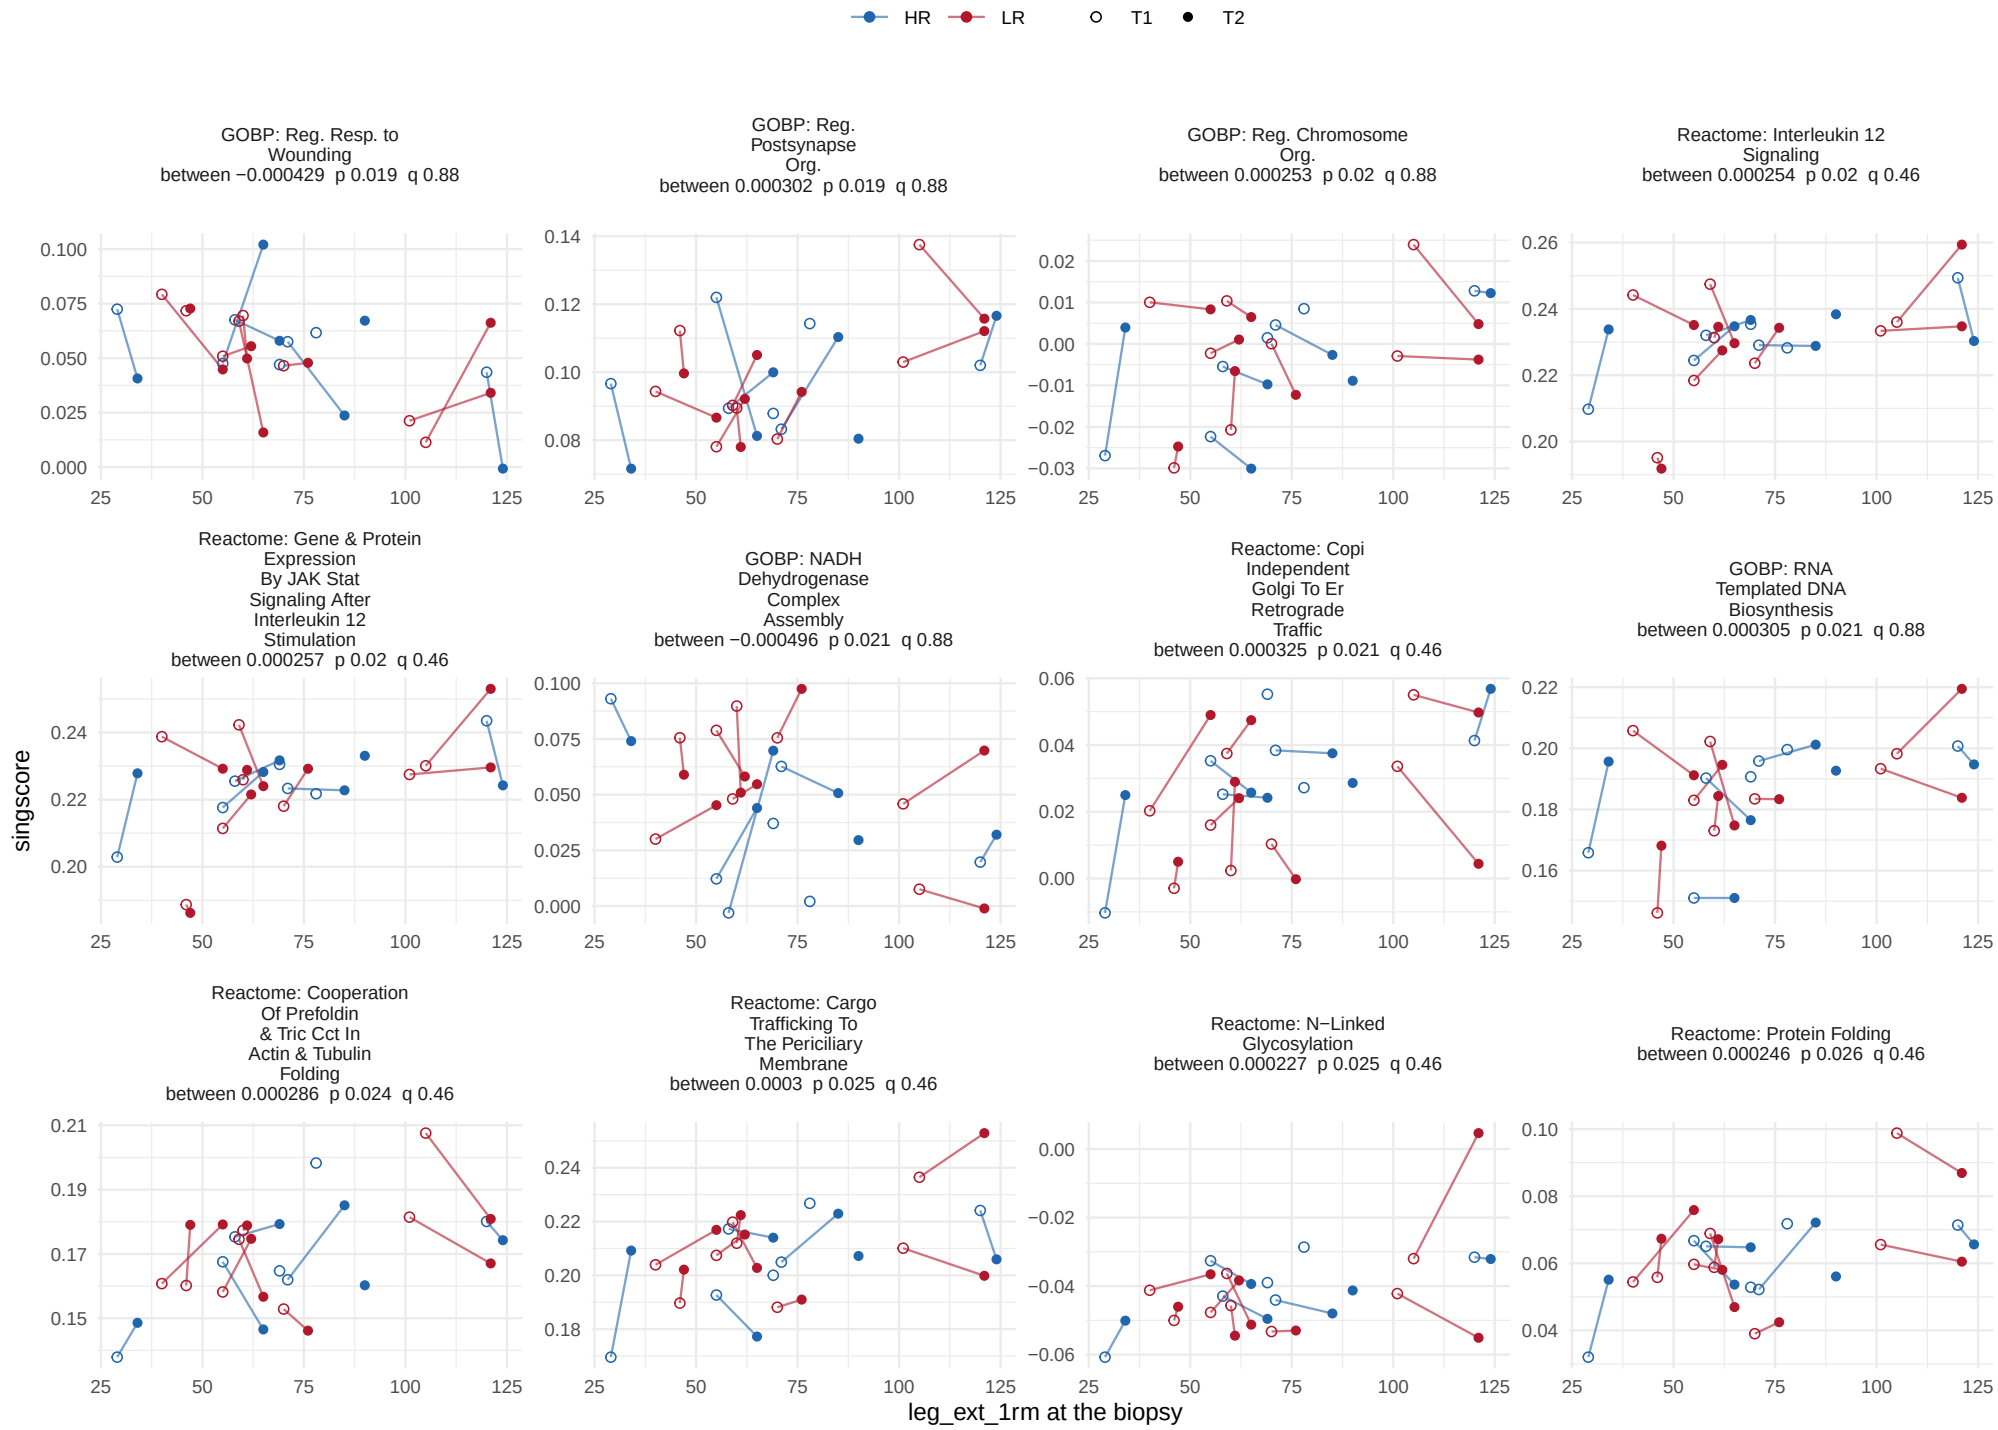

limma on 29 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

leg_ext_1rm, between−person term


60 of 1378 sets at p < 0.05, 0 at BH < 0.05.

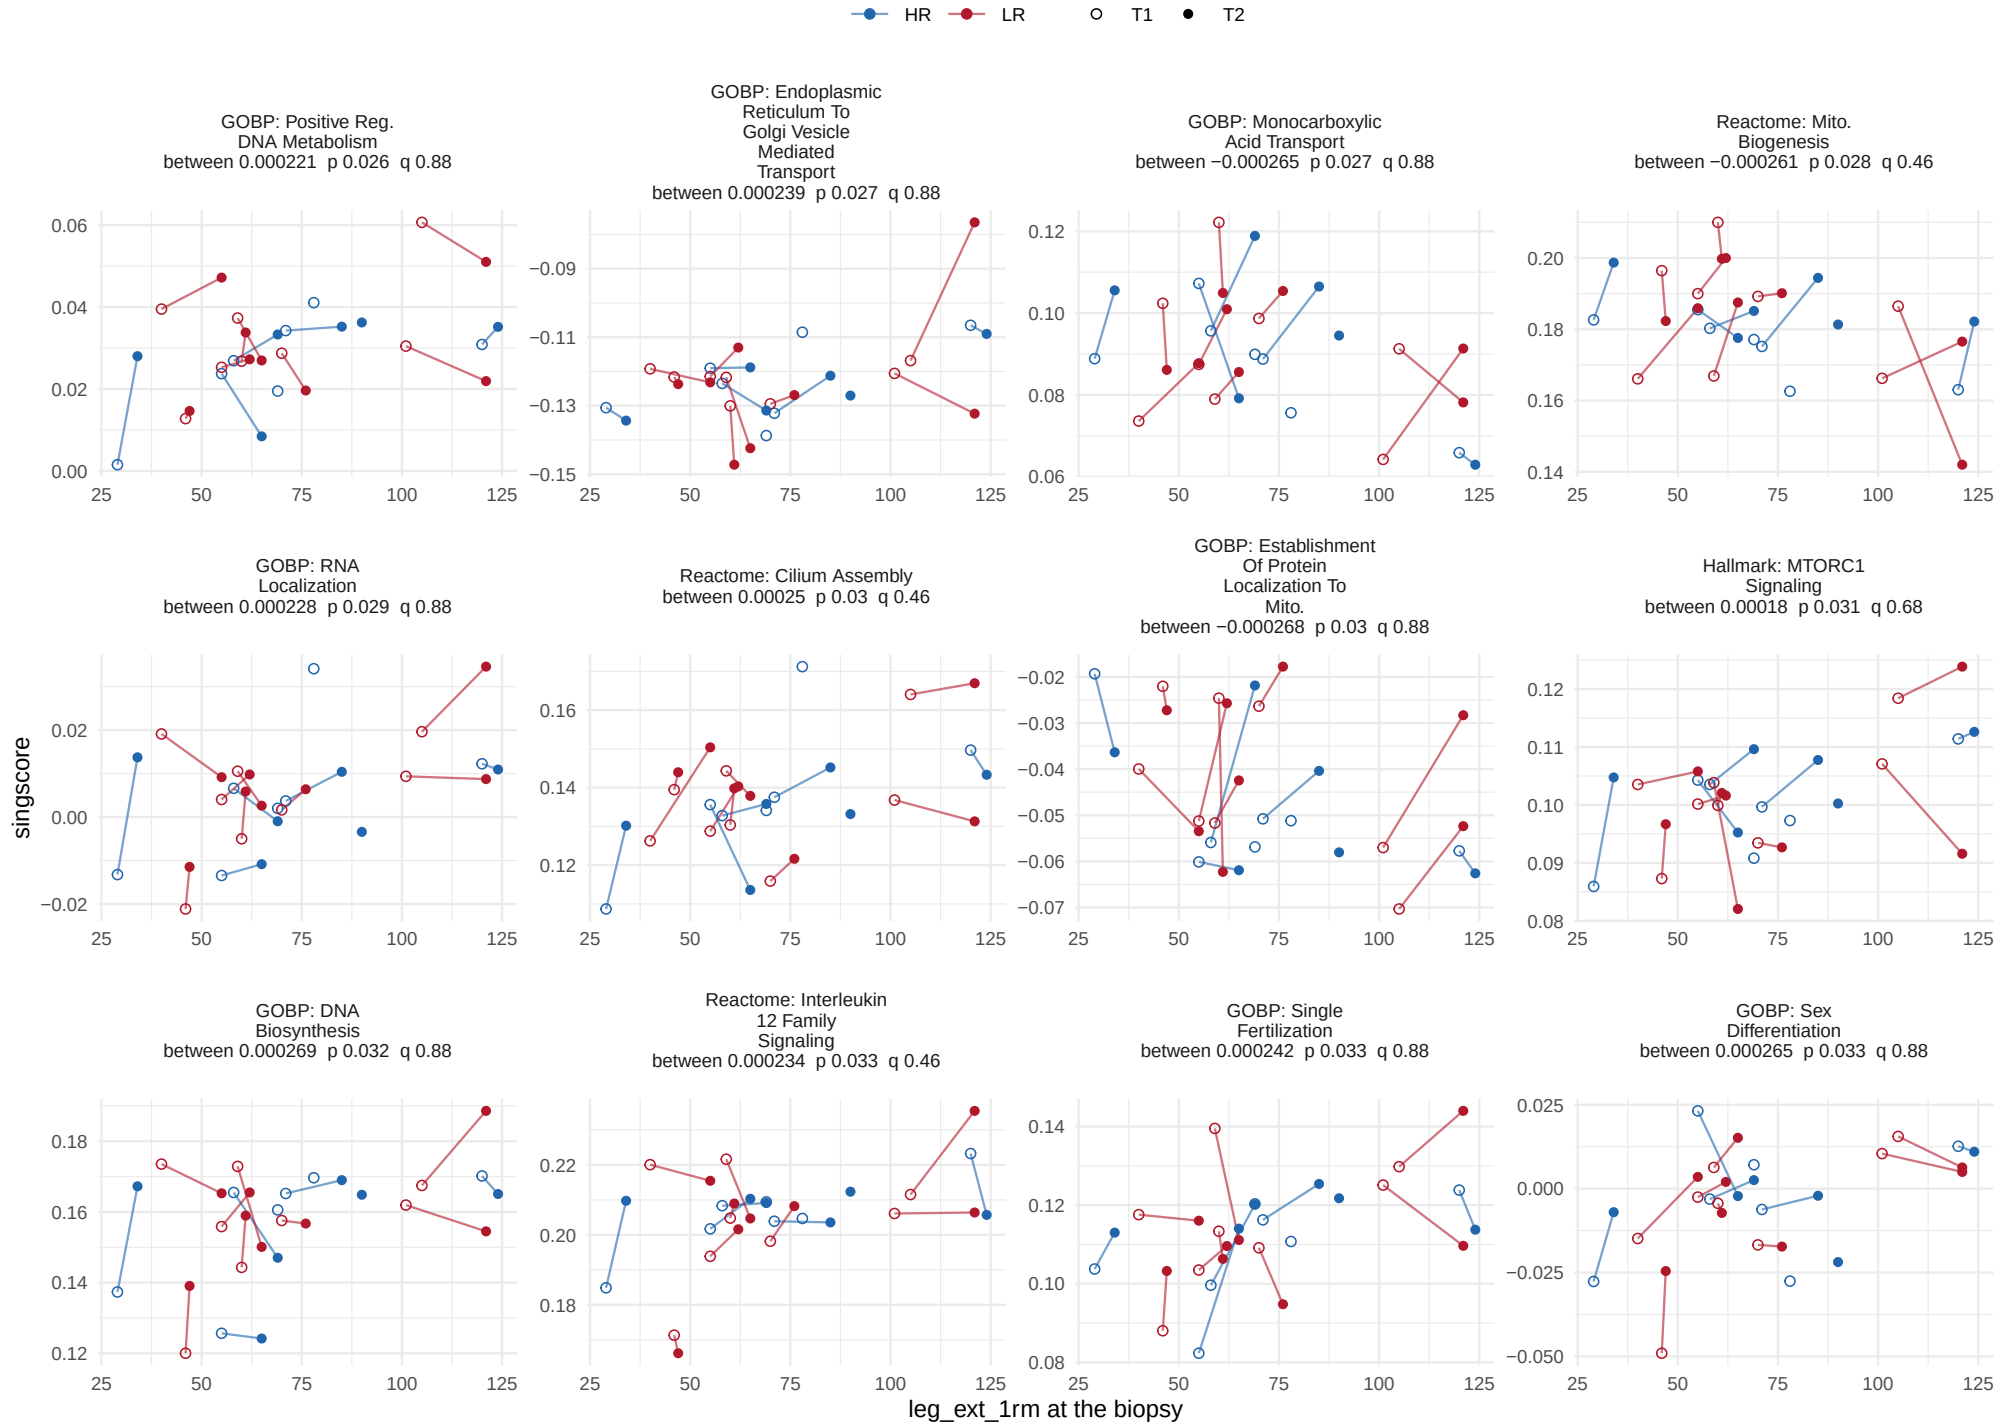

limma on 29 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

leg_ext_1rm, between−person term


60 of 1378 sets at p < 0.05, 0 at BH < 0.05.

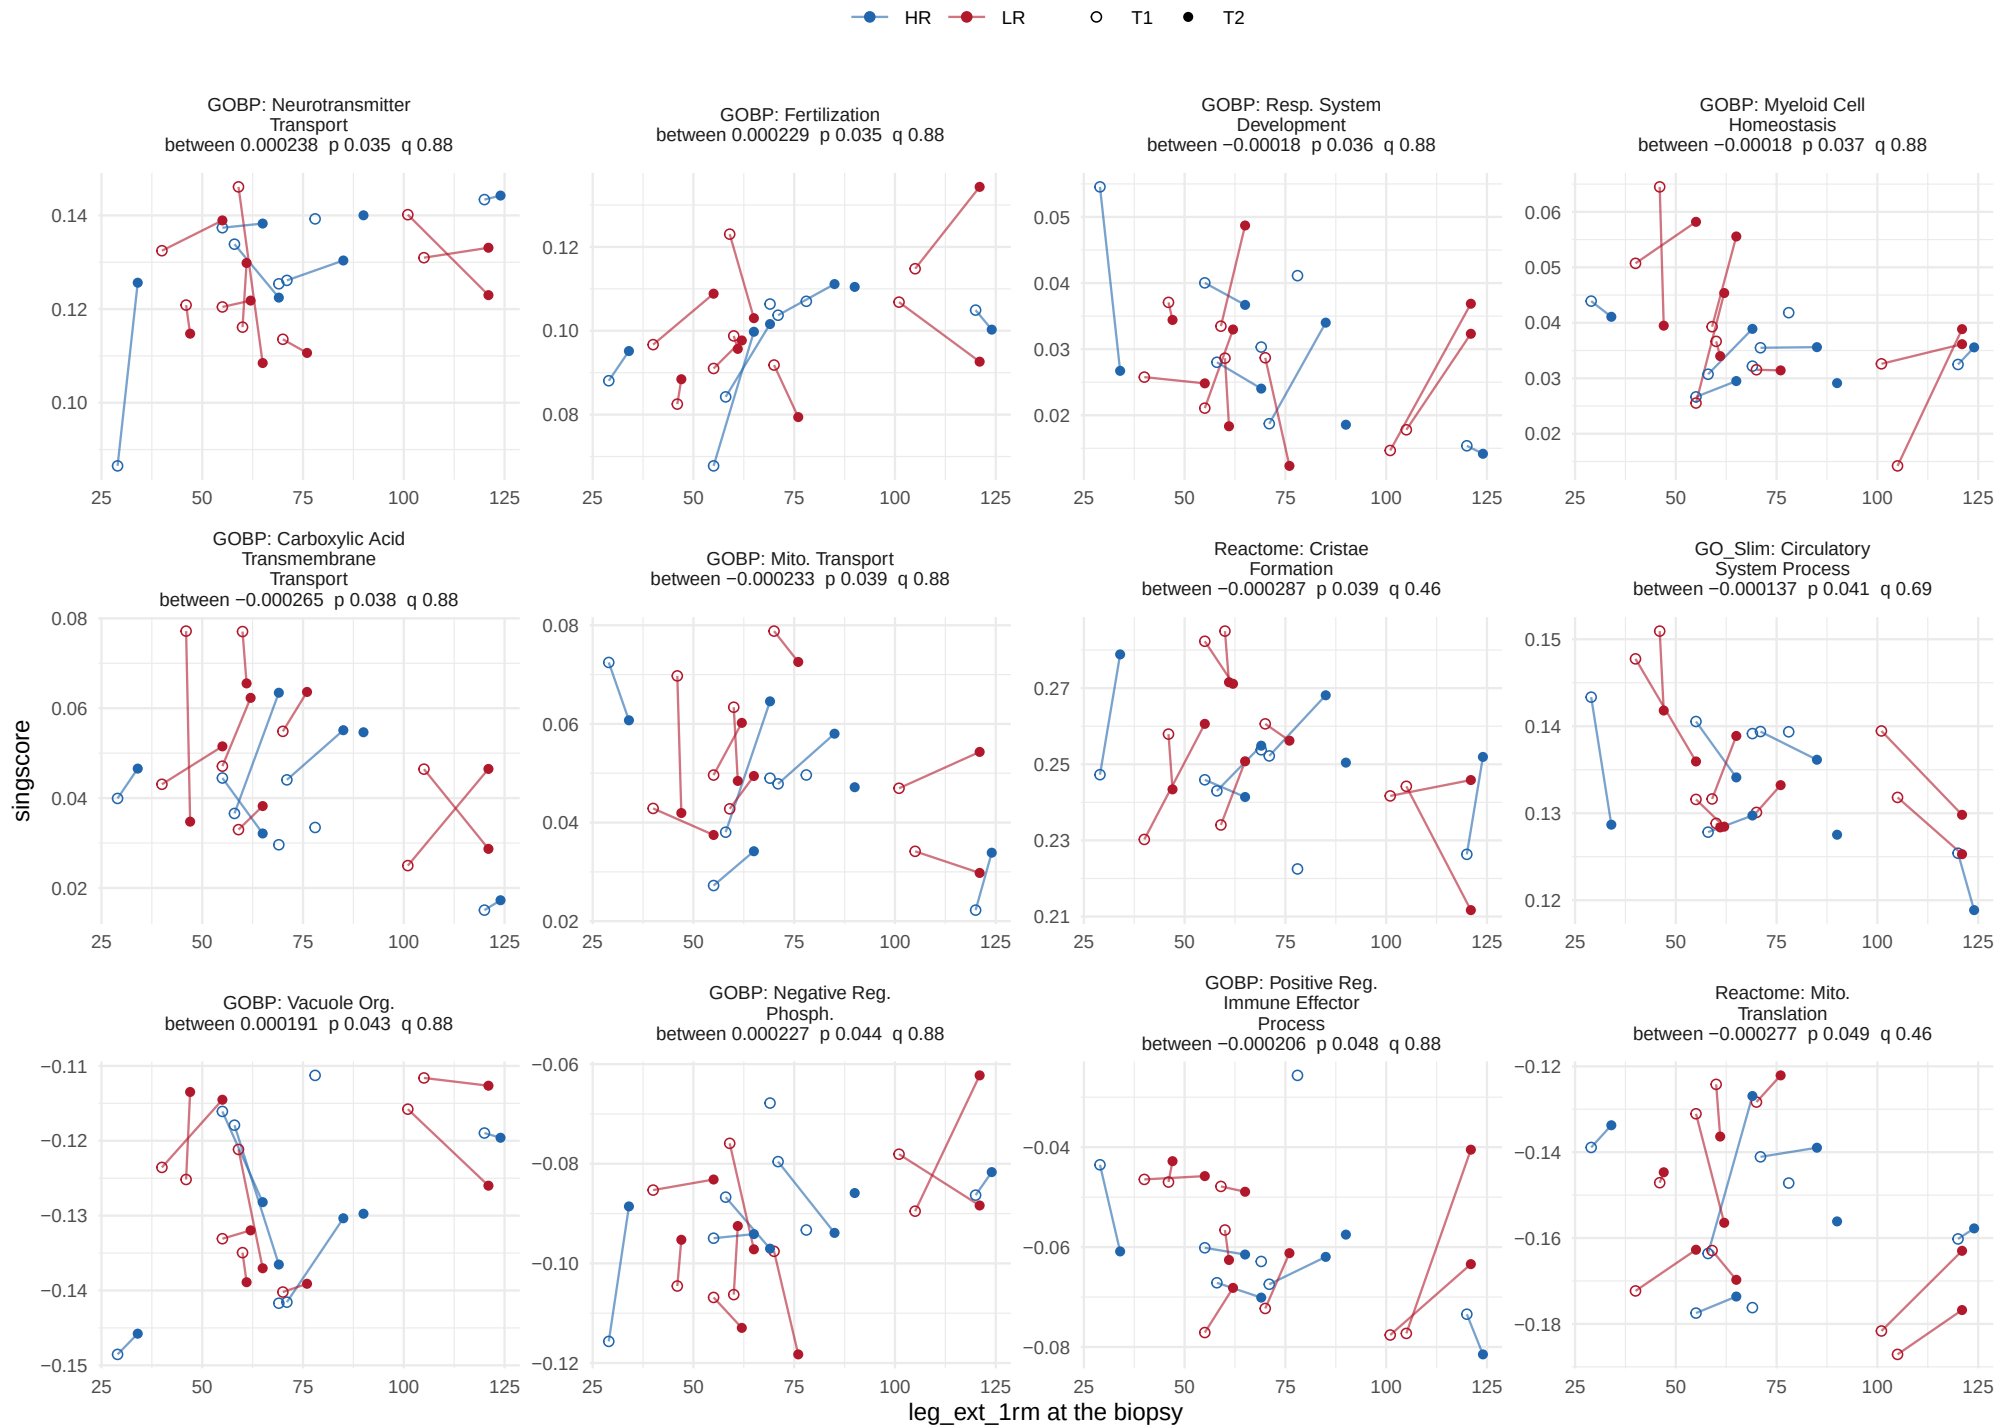

limma on 29 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

leg_ext_1rm, within−person term


92 of 1378 sets at p < 0.05, 0 at BH < 0.05.

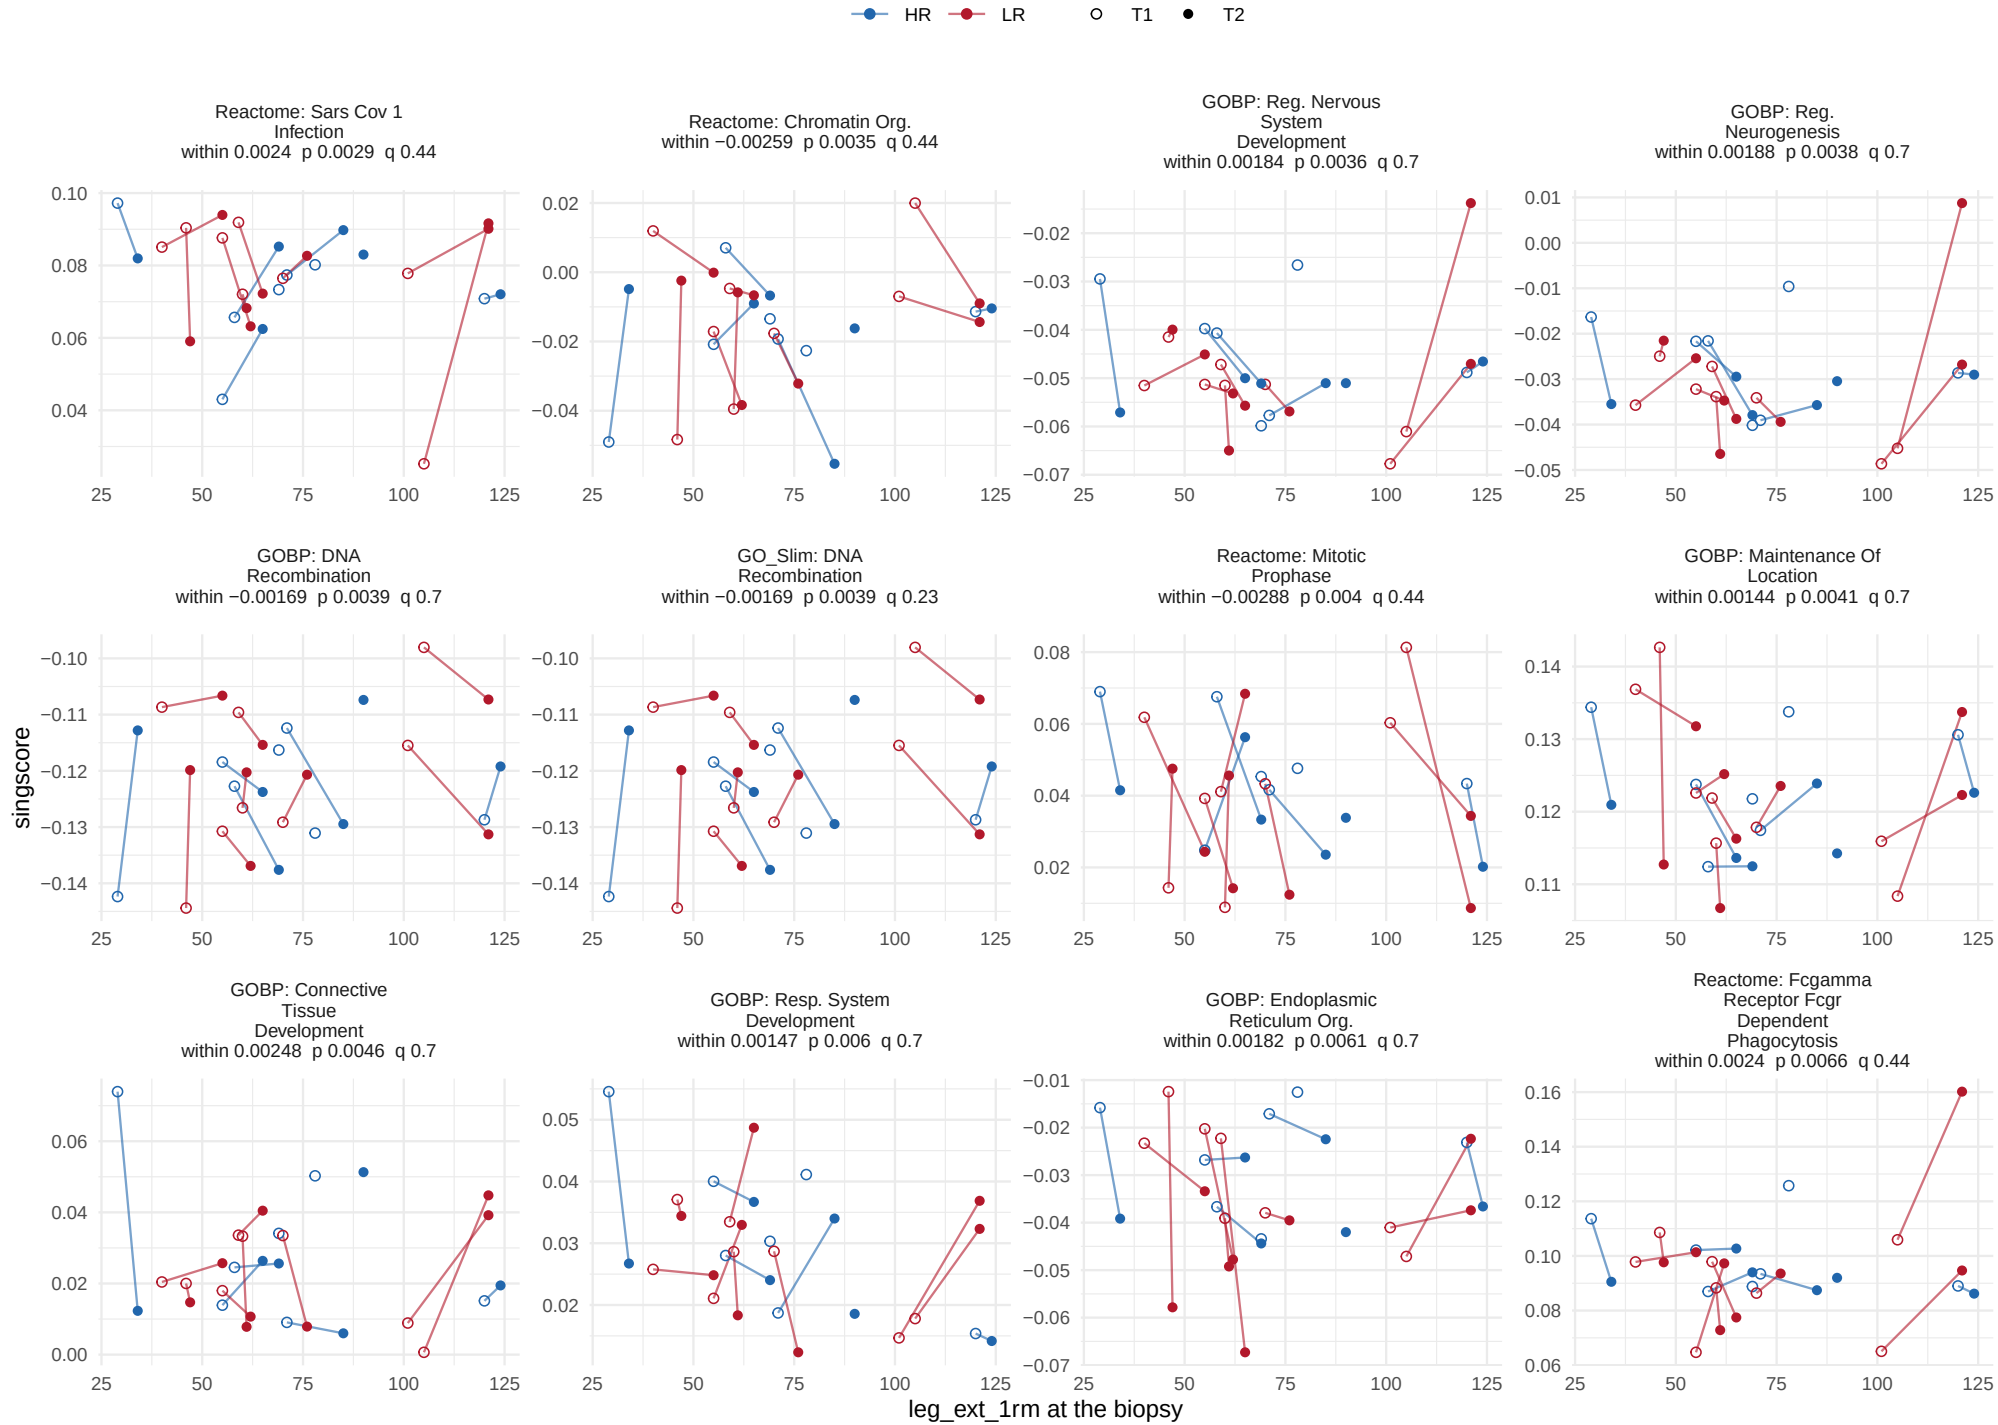

limma on 29 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

leg_ext_1rm, within−person term


92 of 1378 sets at p < 0.05, 0 at BH < 0.05.

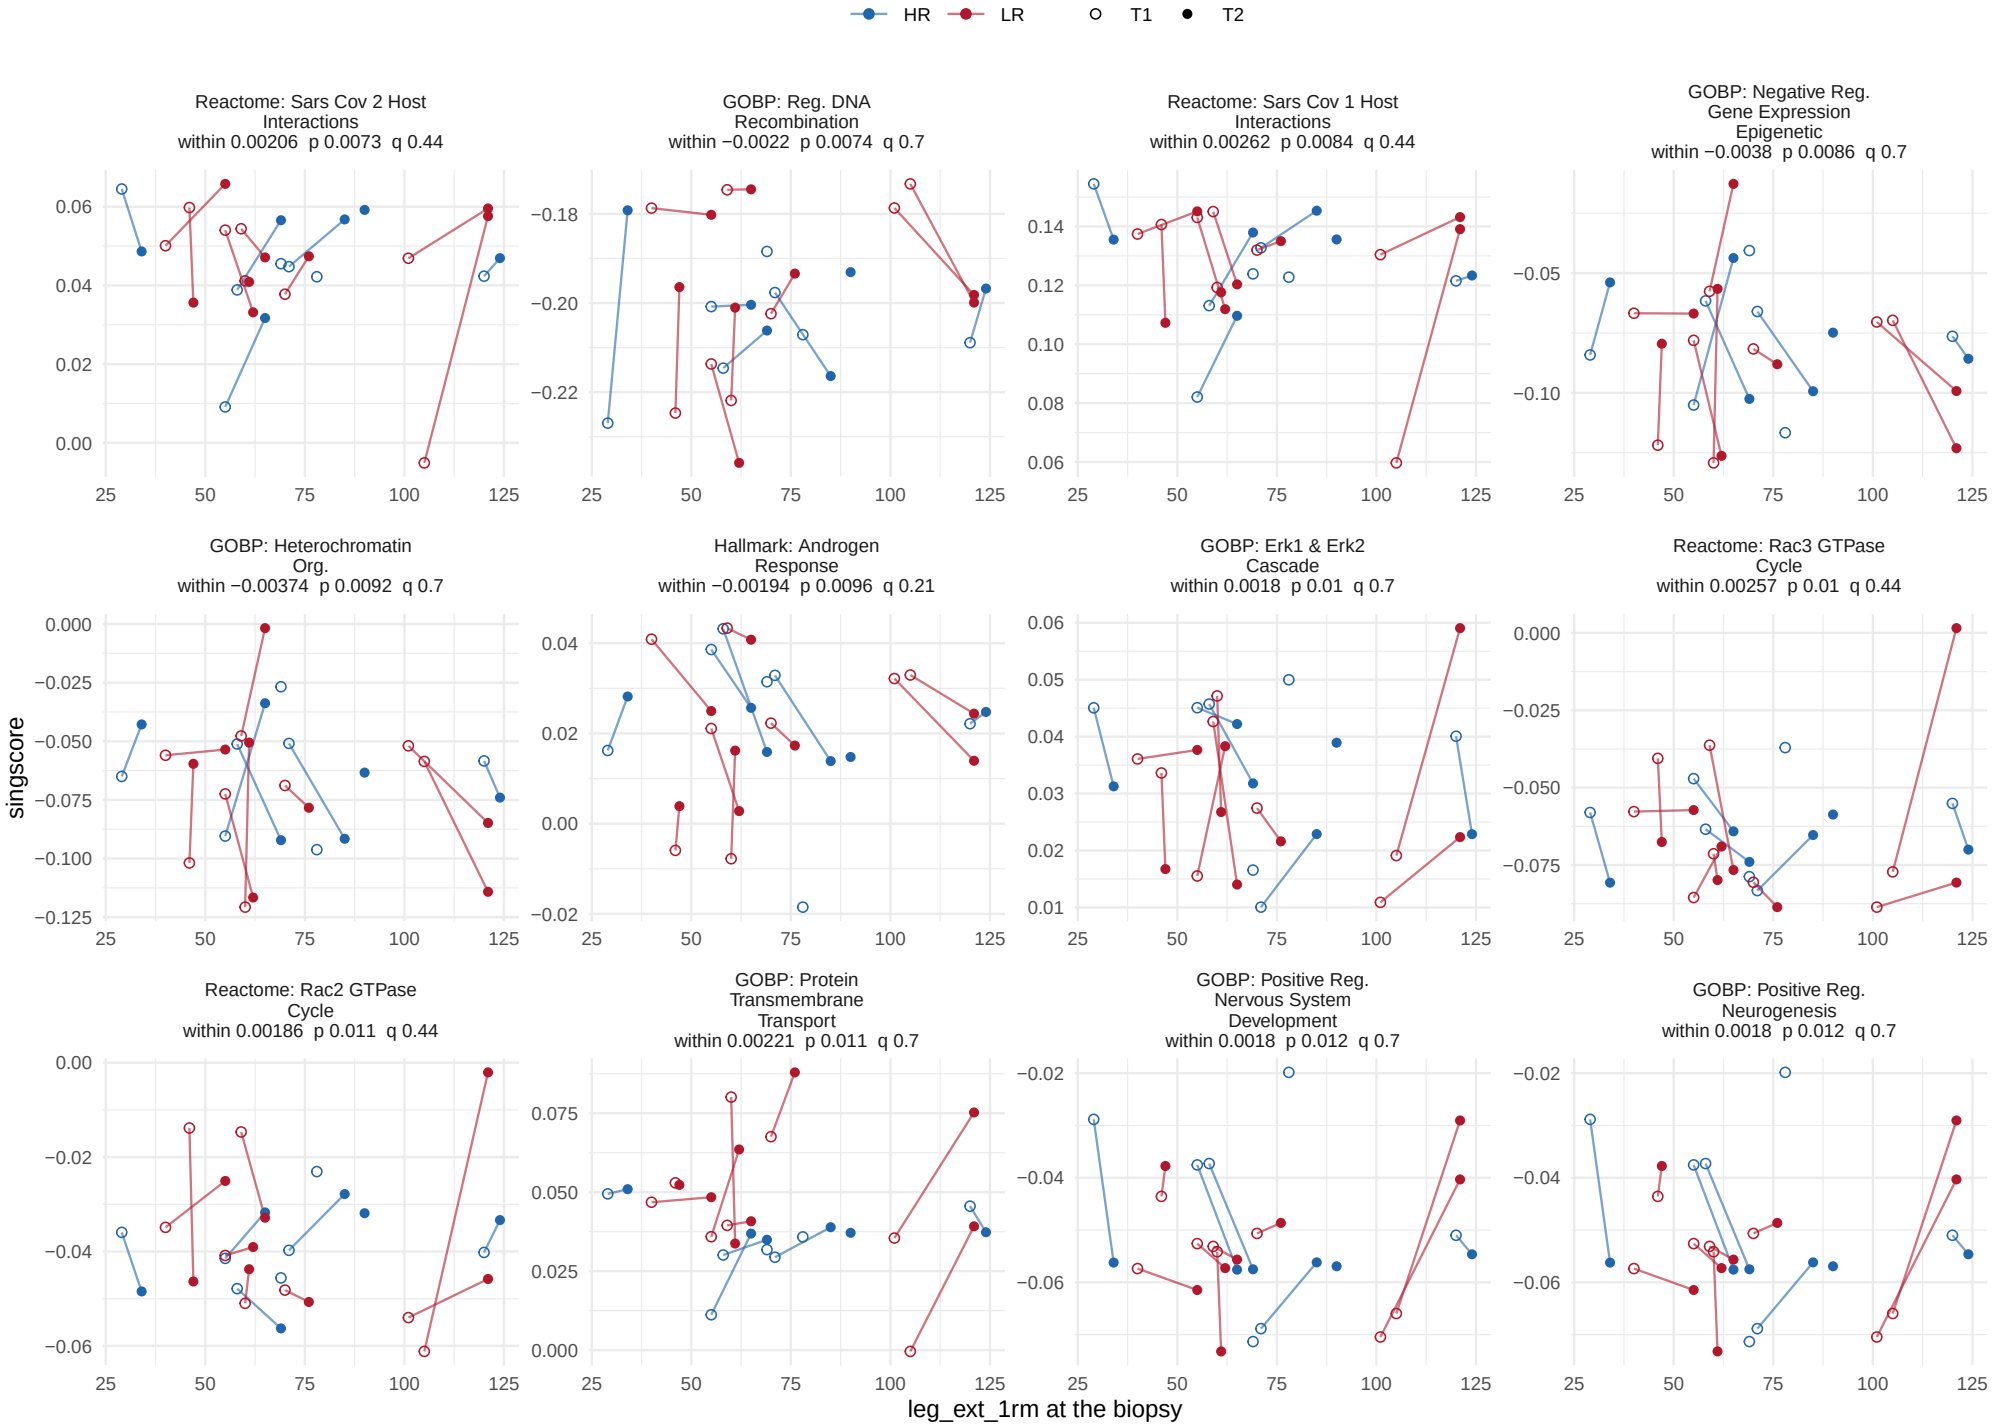

limma on 29 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

leg_ext_1rm, within−person term


92 of 1378 sets at p < 0.05, 0 at BH < 0.05.

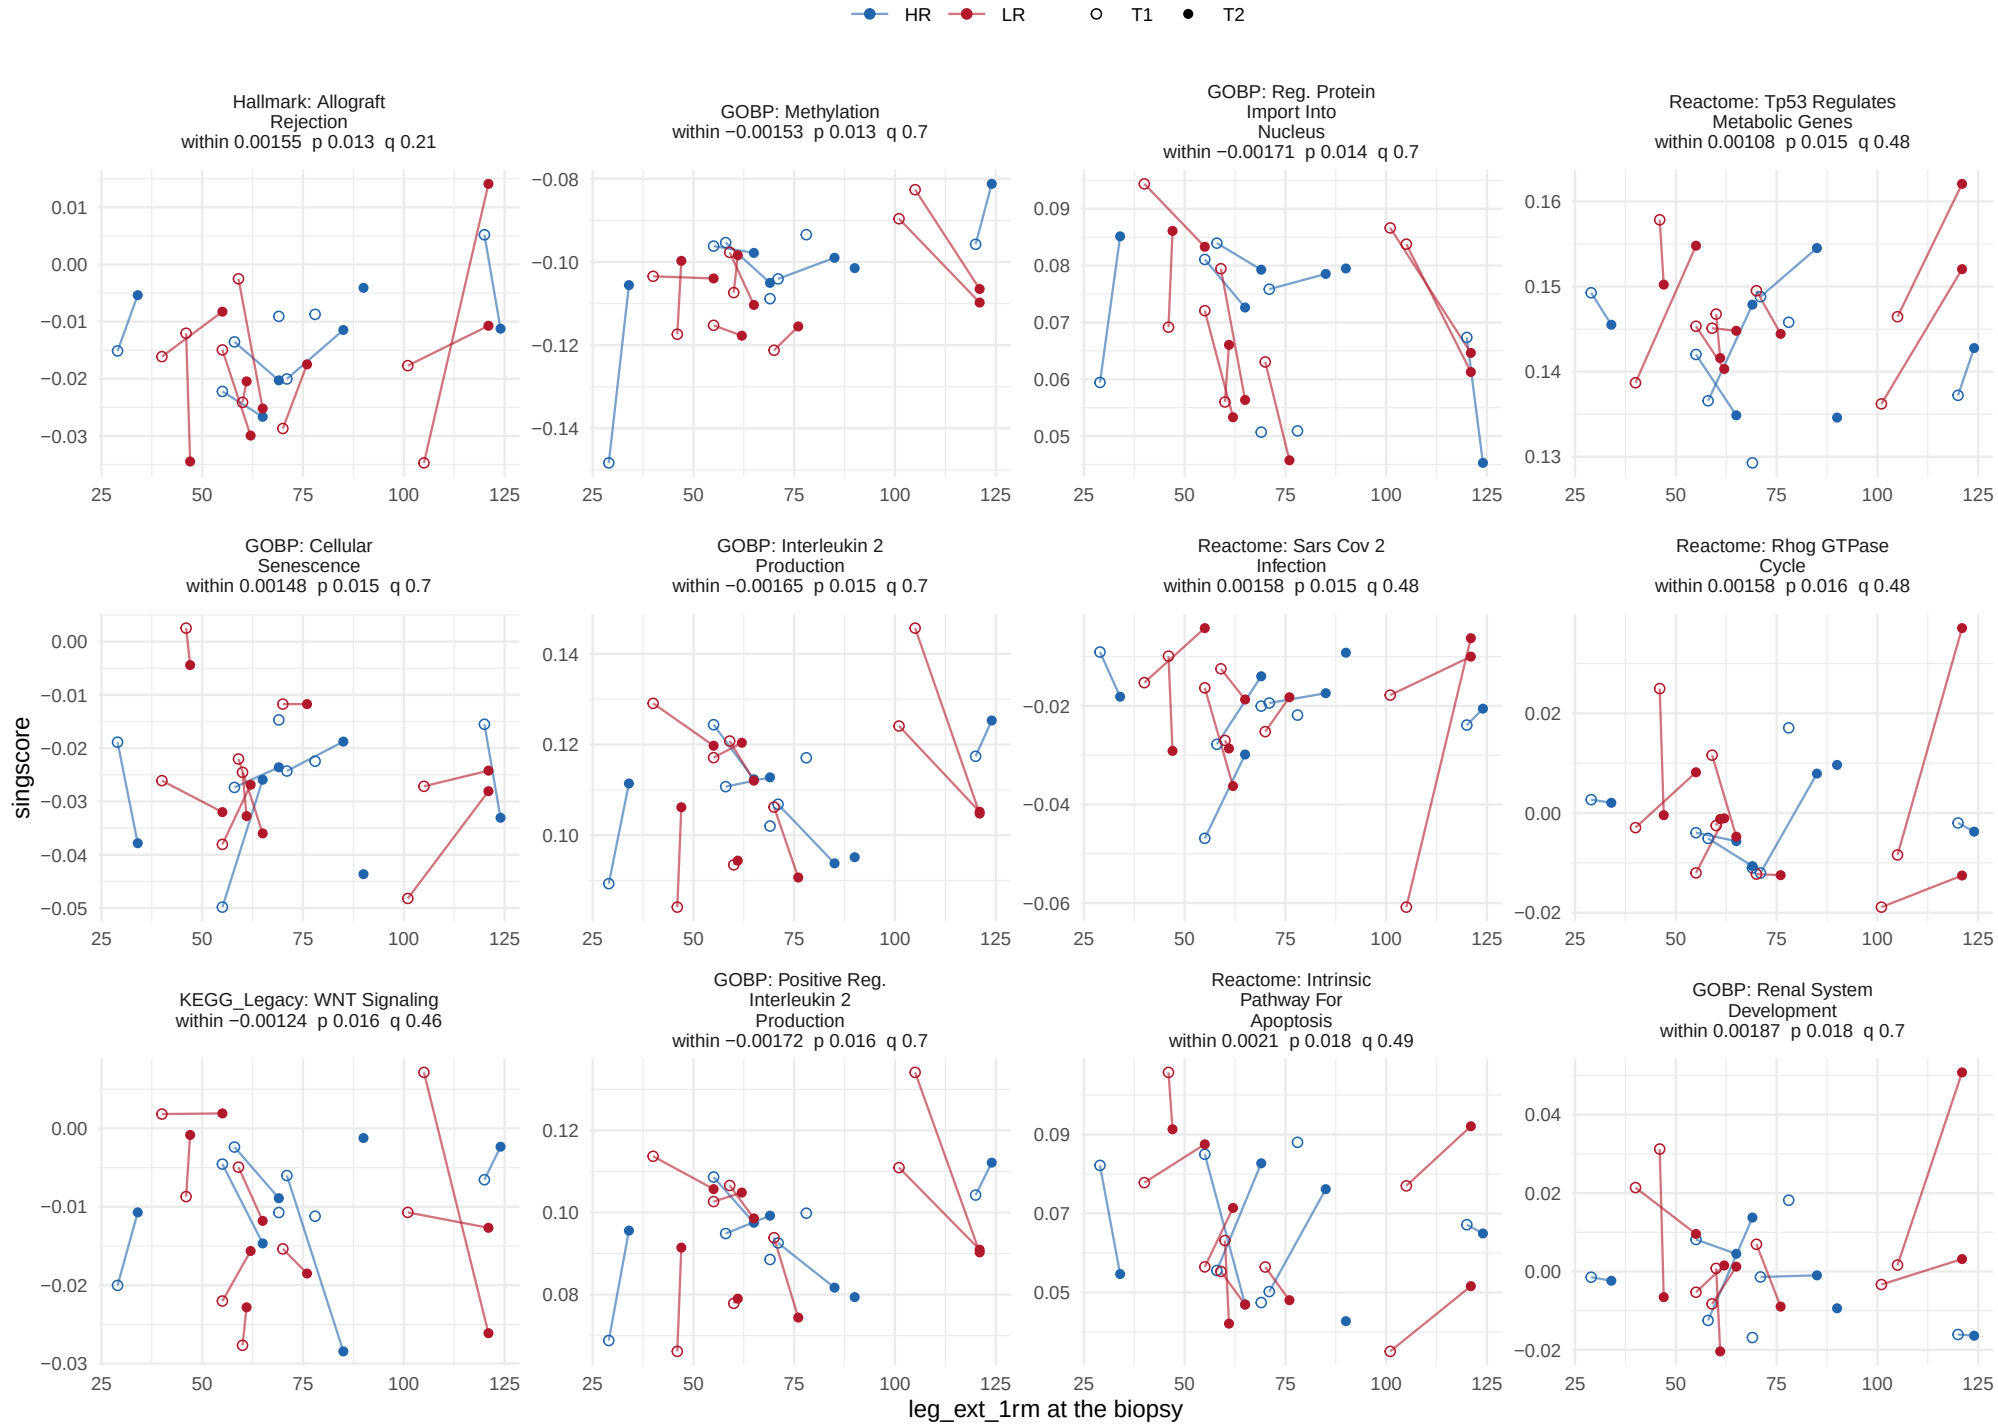

limma on 29 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

leg_ext_1rm, within−person term


92 of 1378 sets at p < 0.05, 0 at BH < 0.05.

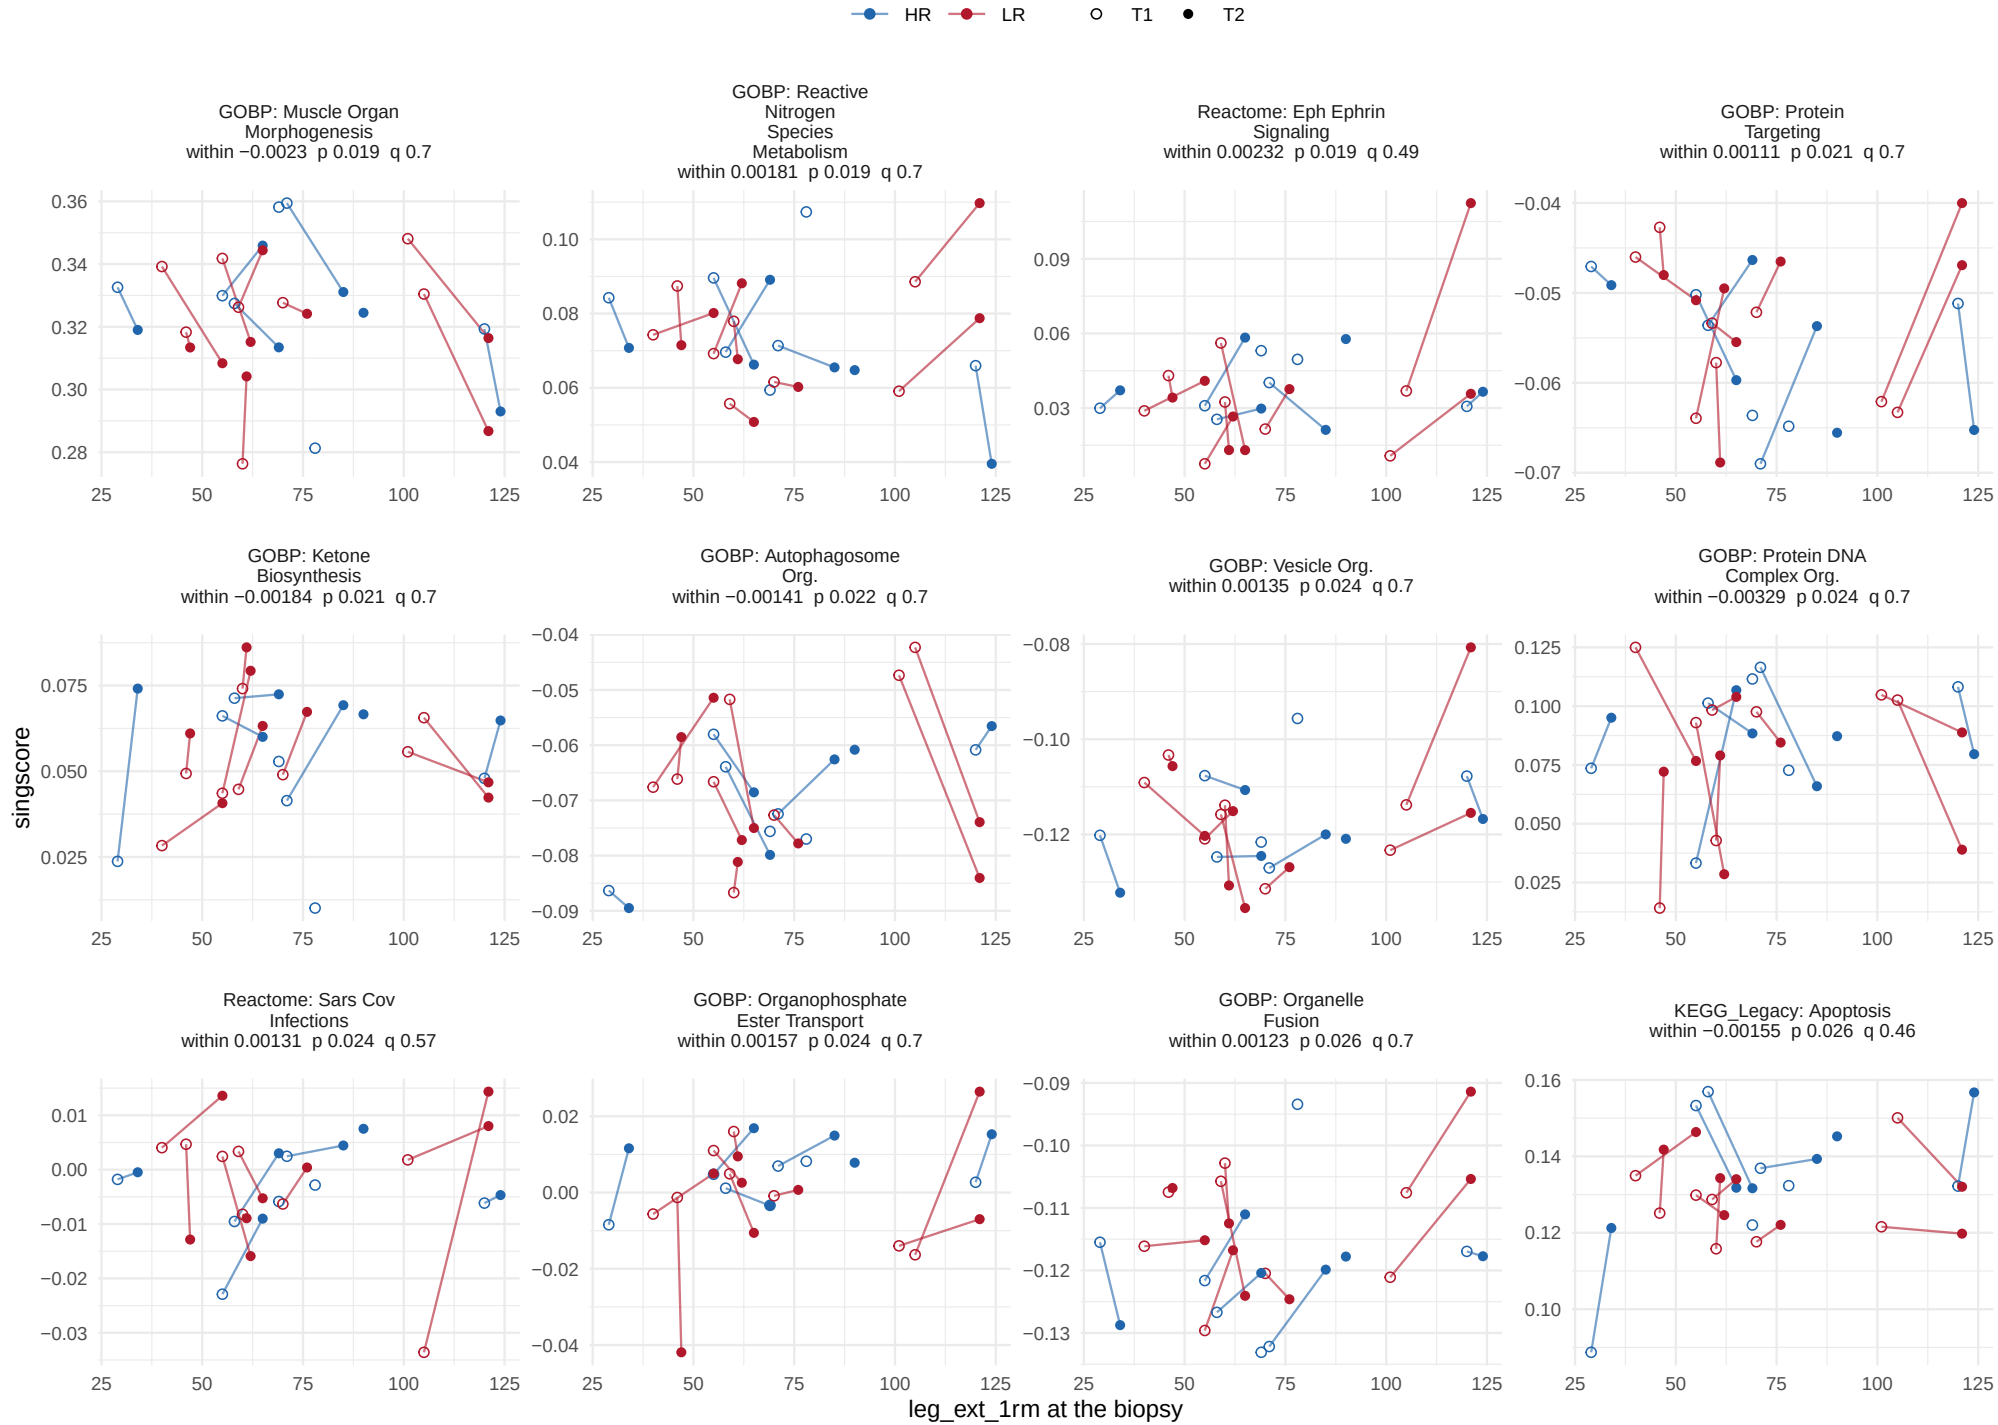

limma on 29 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

leg_ext_1rm, within−person term


92 of 1378 sets at p < 0.05, 0 at BH < 0.05.

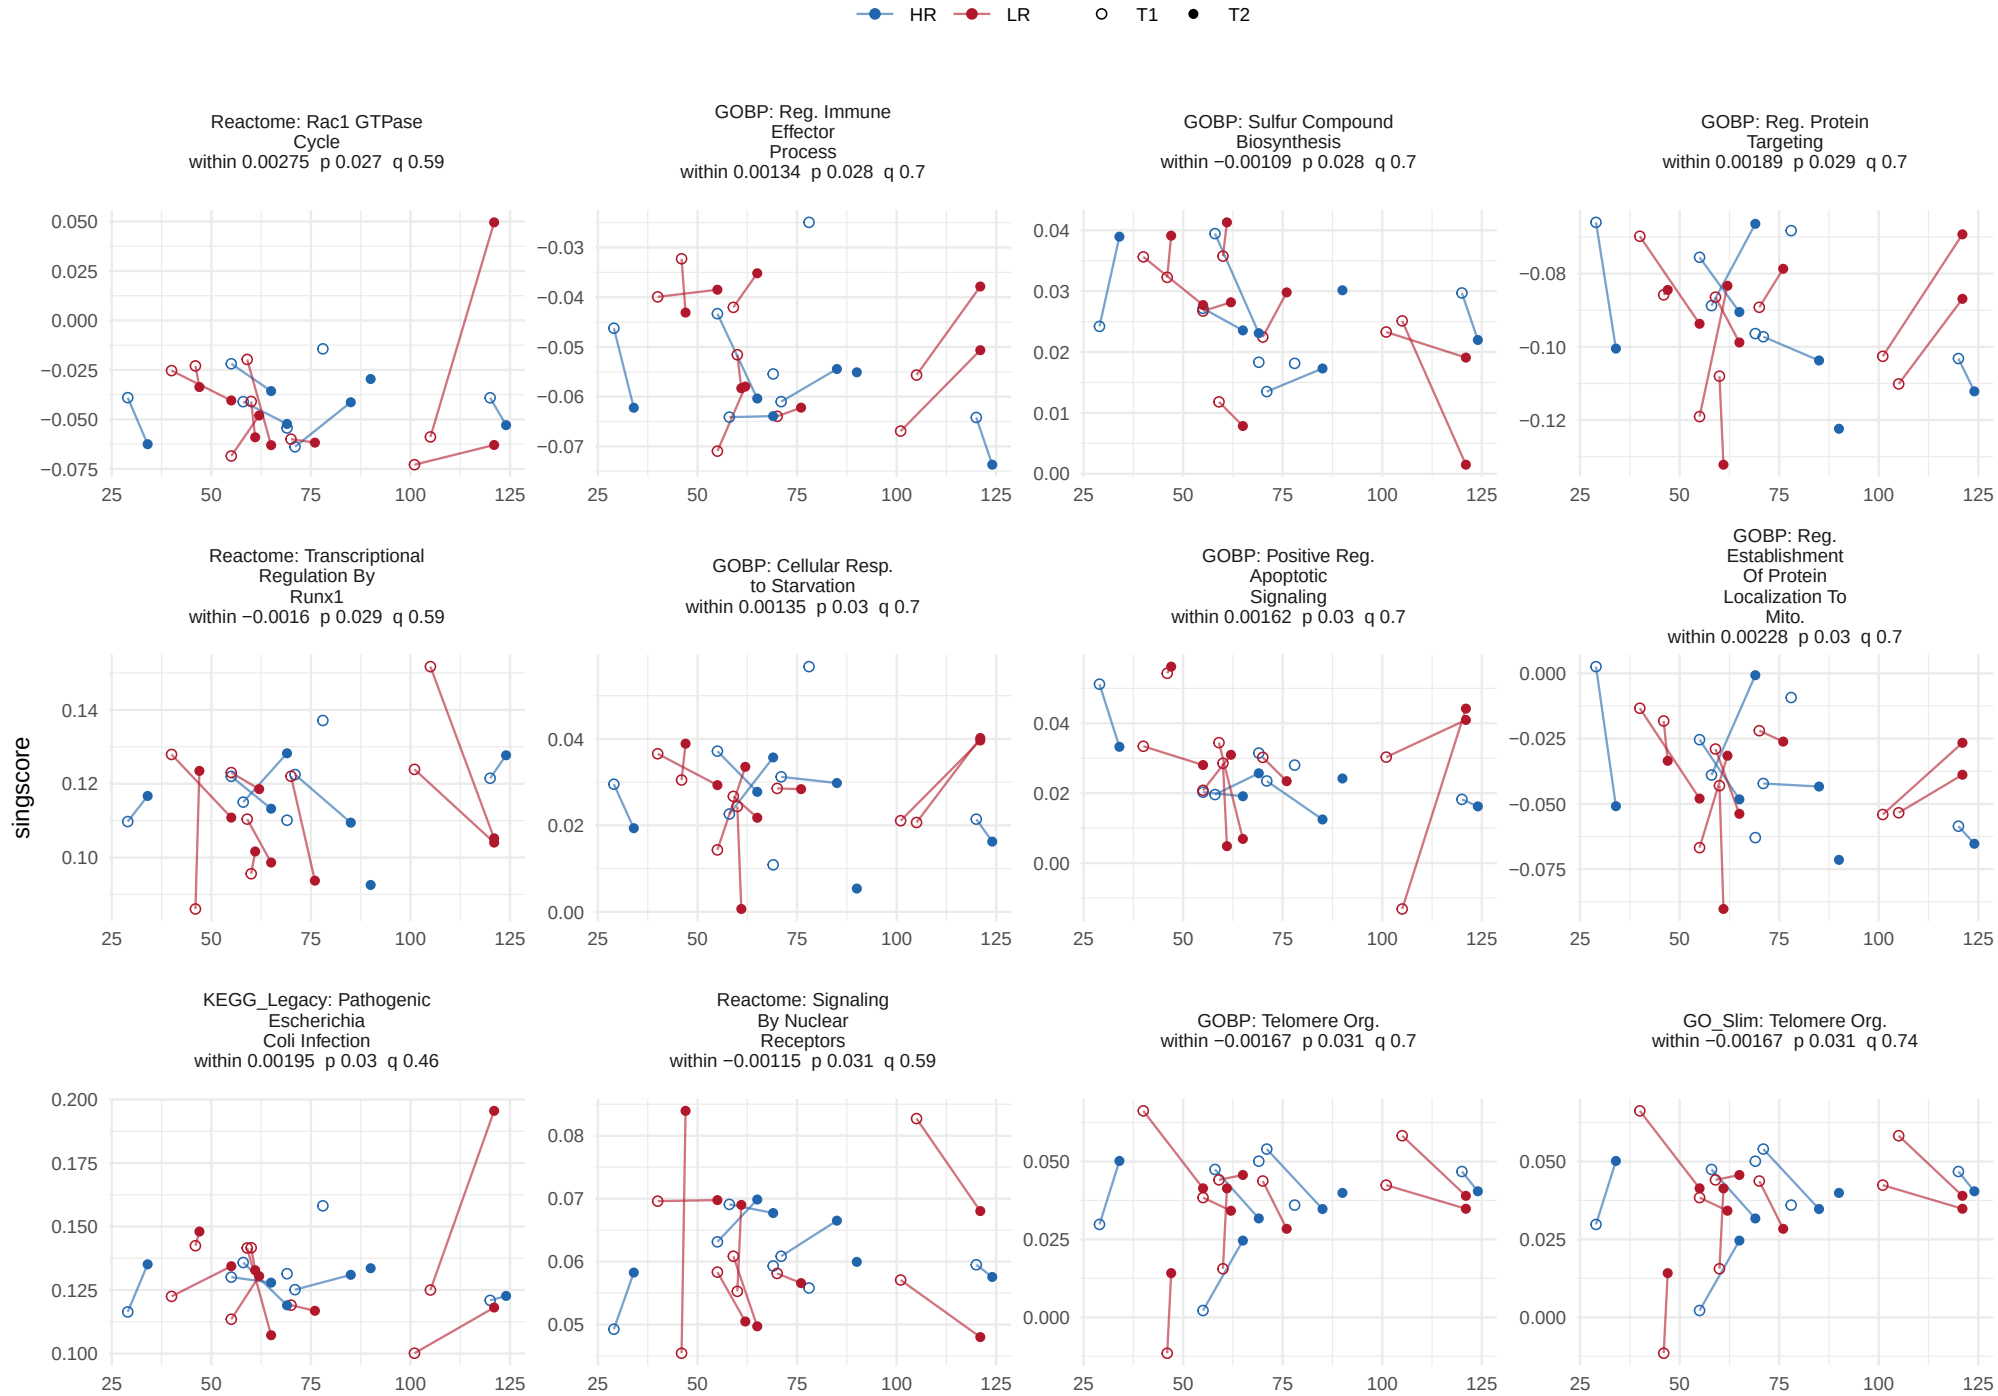

limma on 29 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

leg_ext_1rm, within−person term


92 of 1378 sets at p < 0.05, 0 at BH < 0.05.

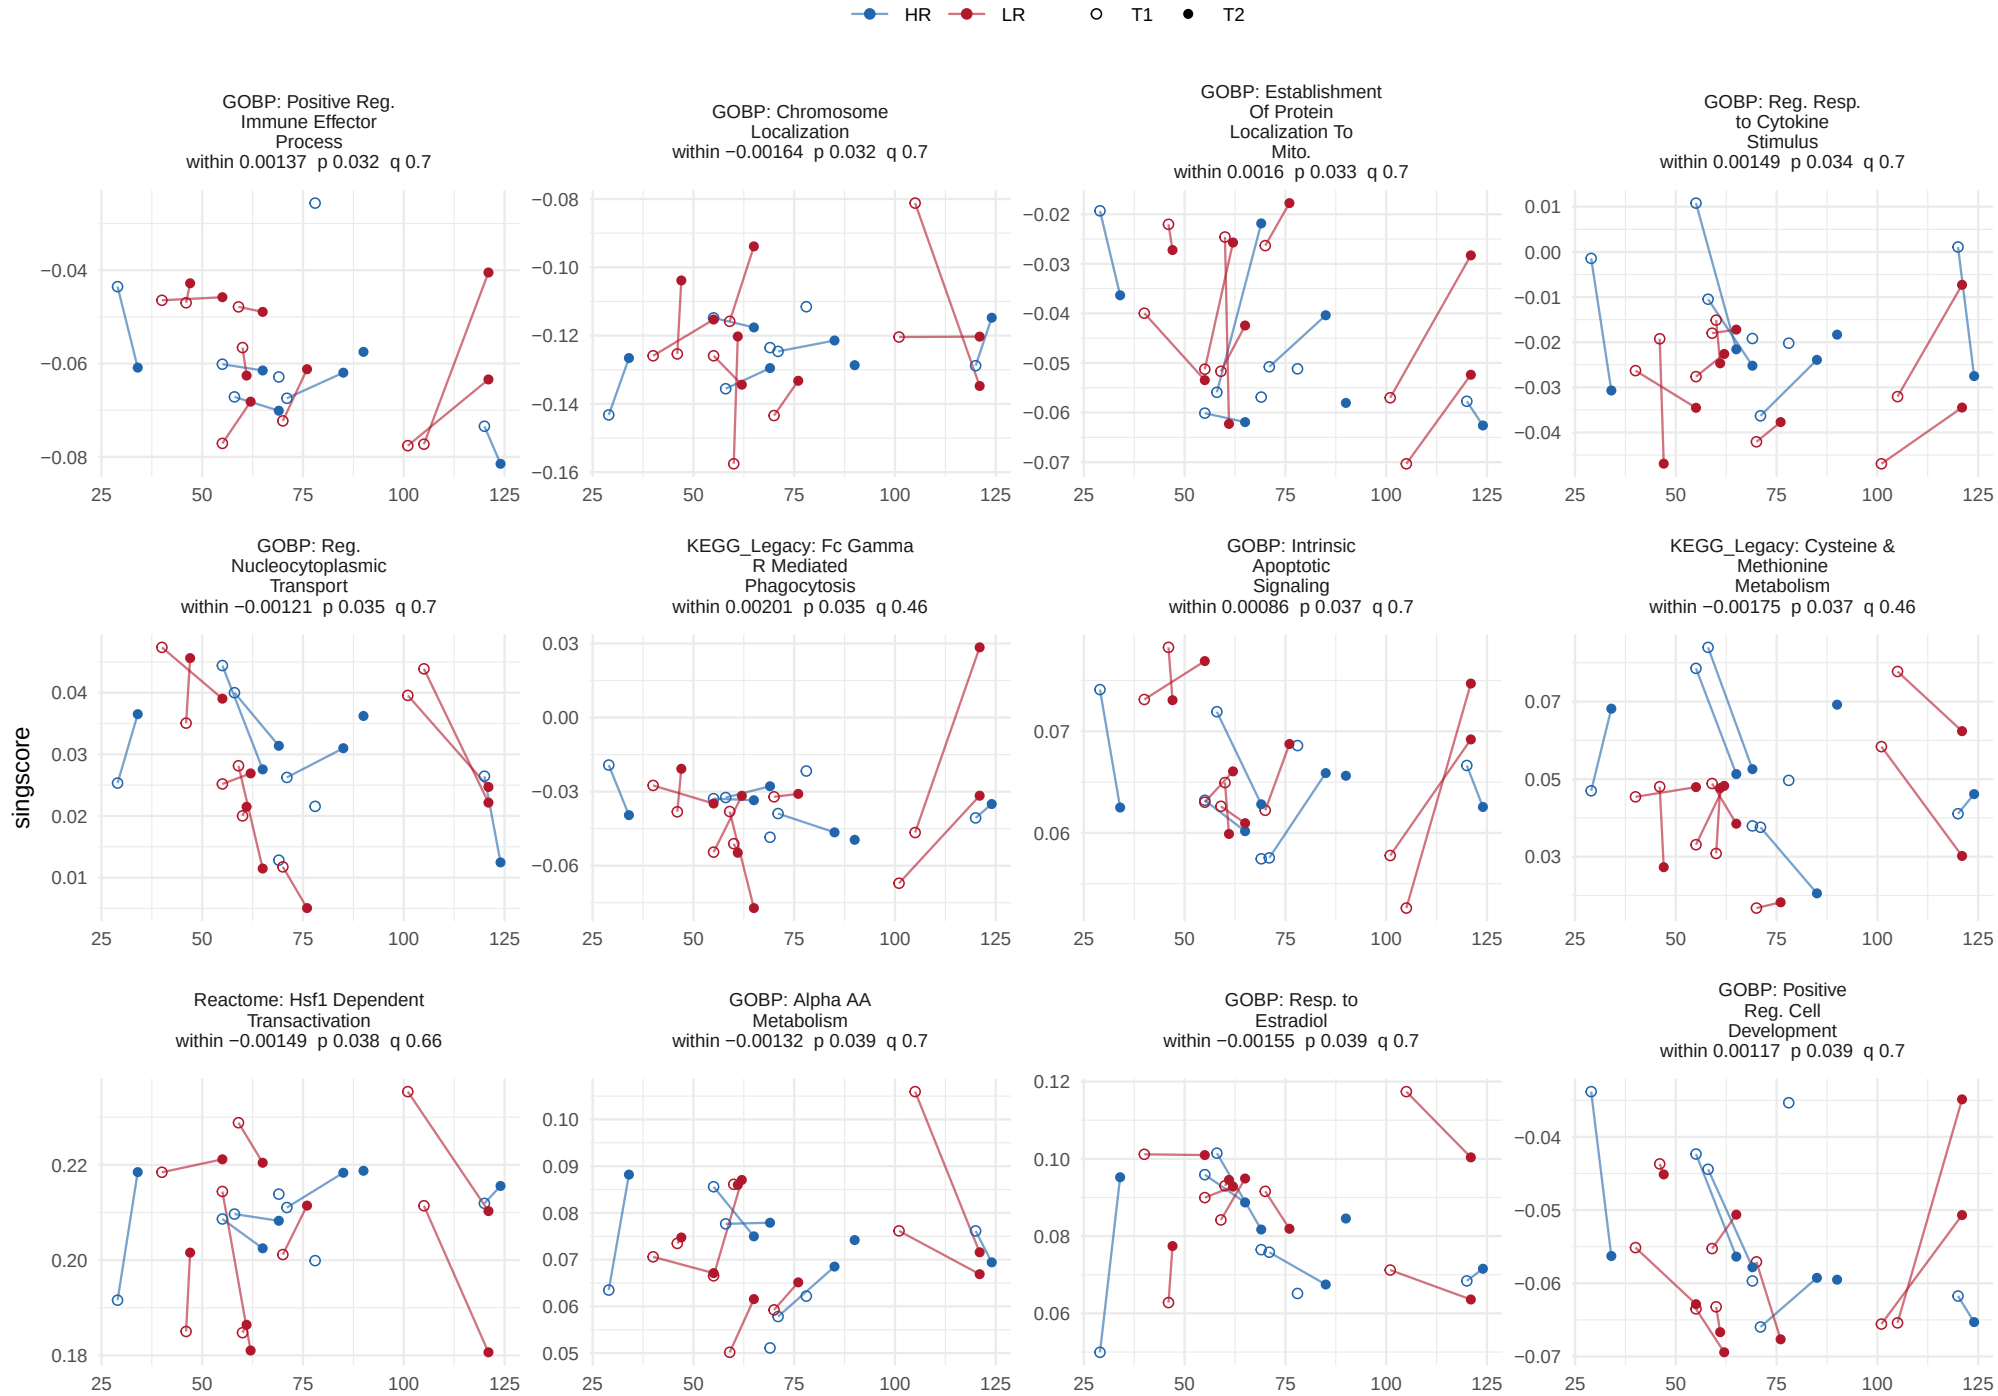

limma on 29 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

leg_ext_1rm, within−person term


92 of 1378 sets at p < 0.05, 0 at BH < 0.05.

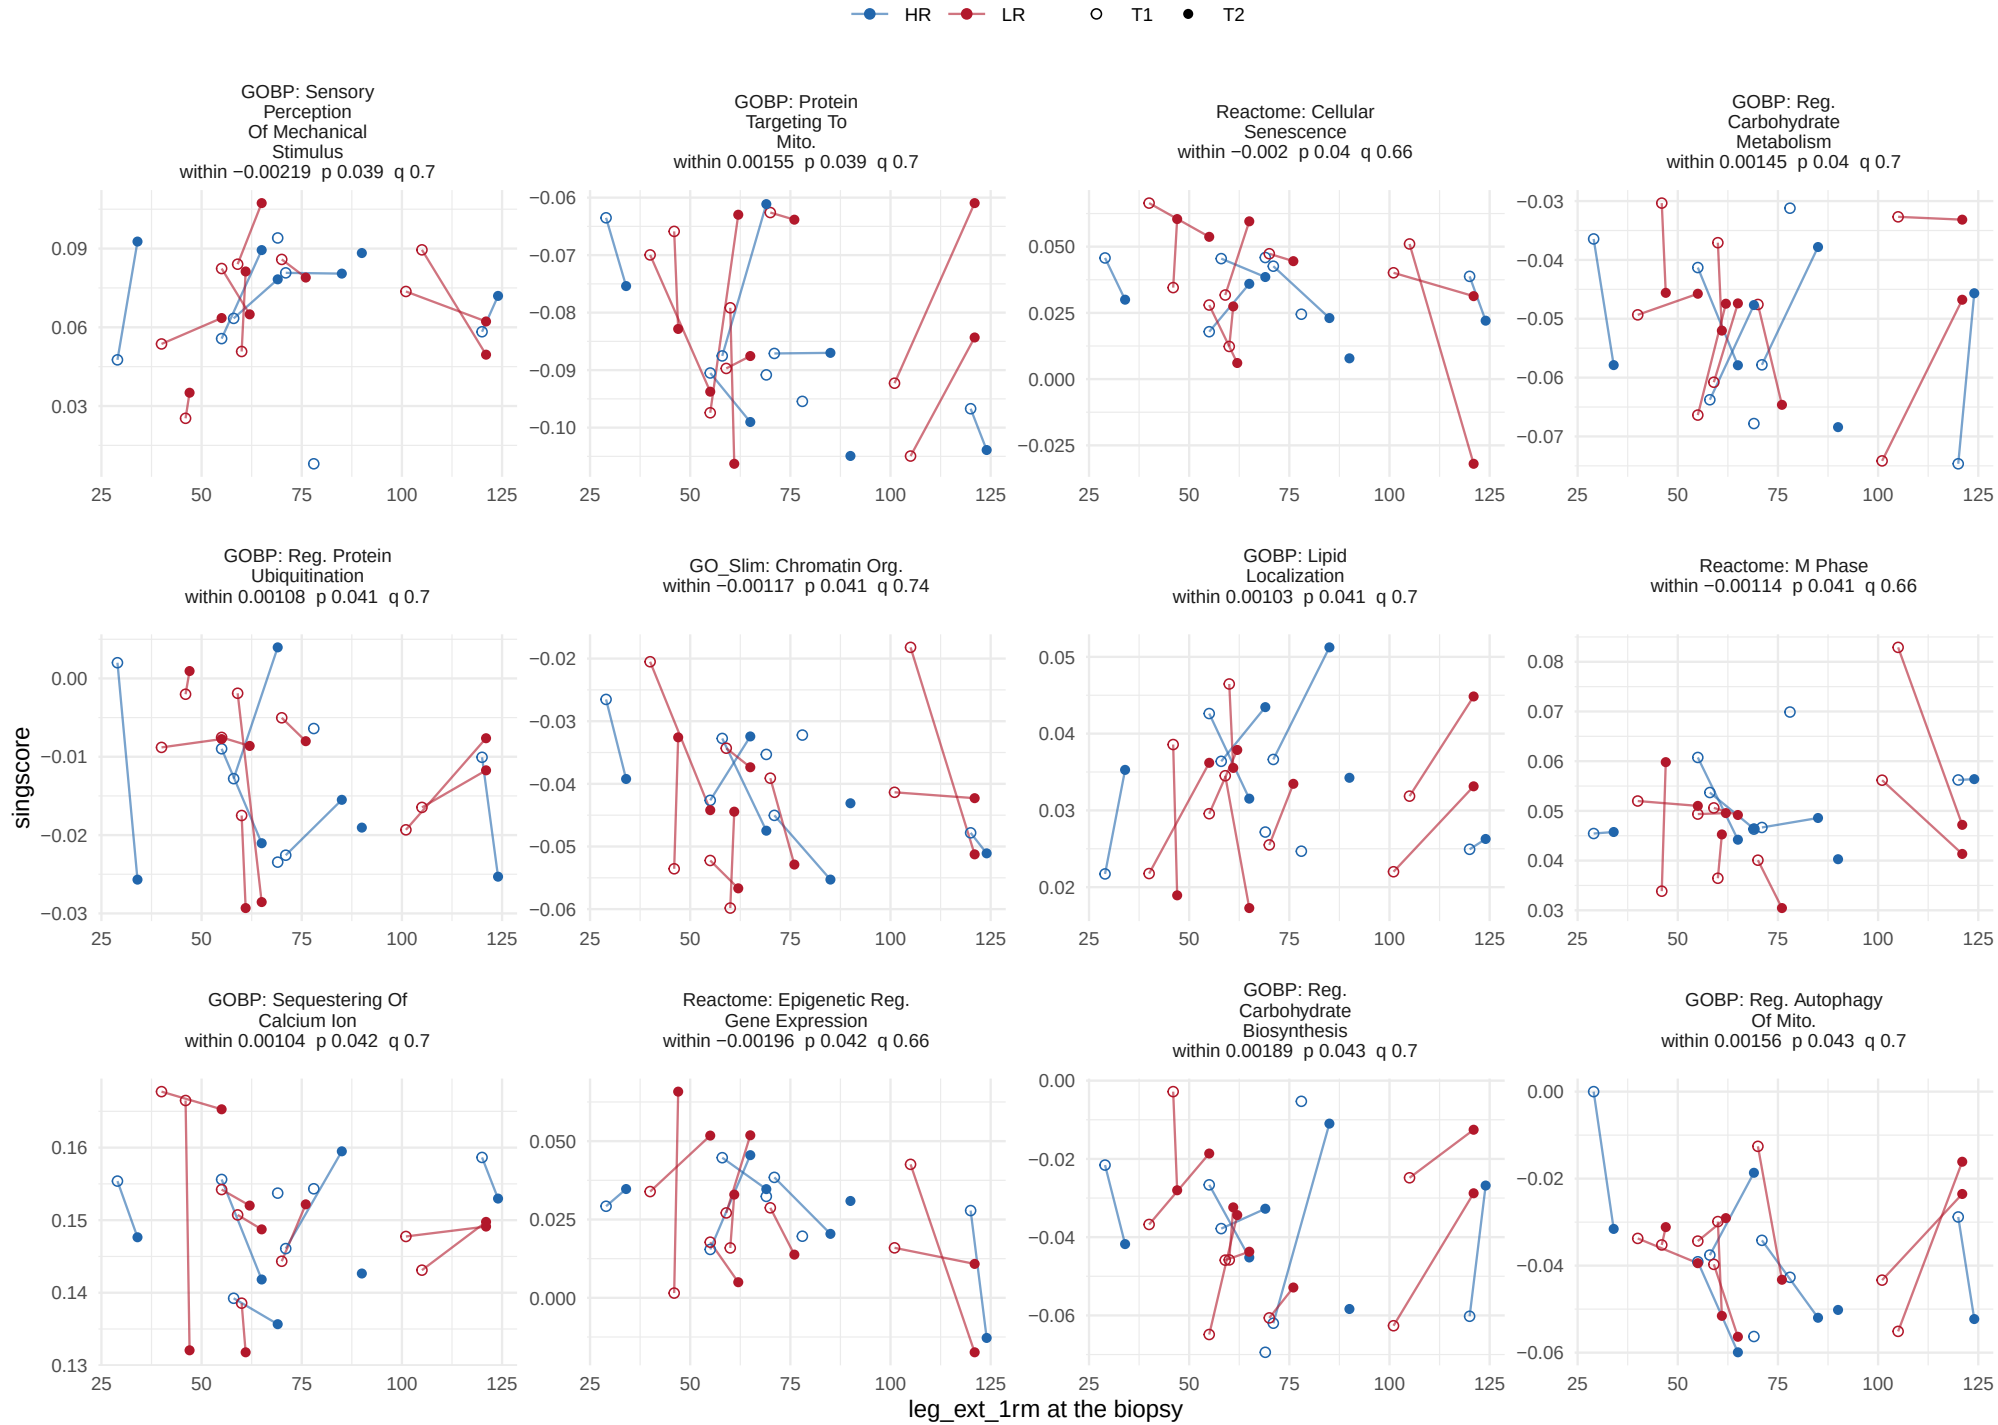

limma on 29 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

leg_ext_1rm, within−person term


92 of 1378 sets at p < 0.05, 0 at BH < 0.05.

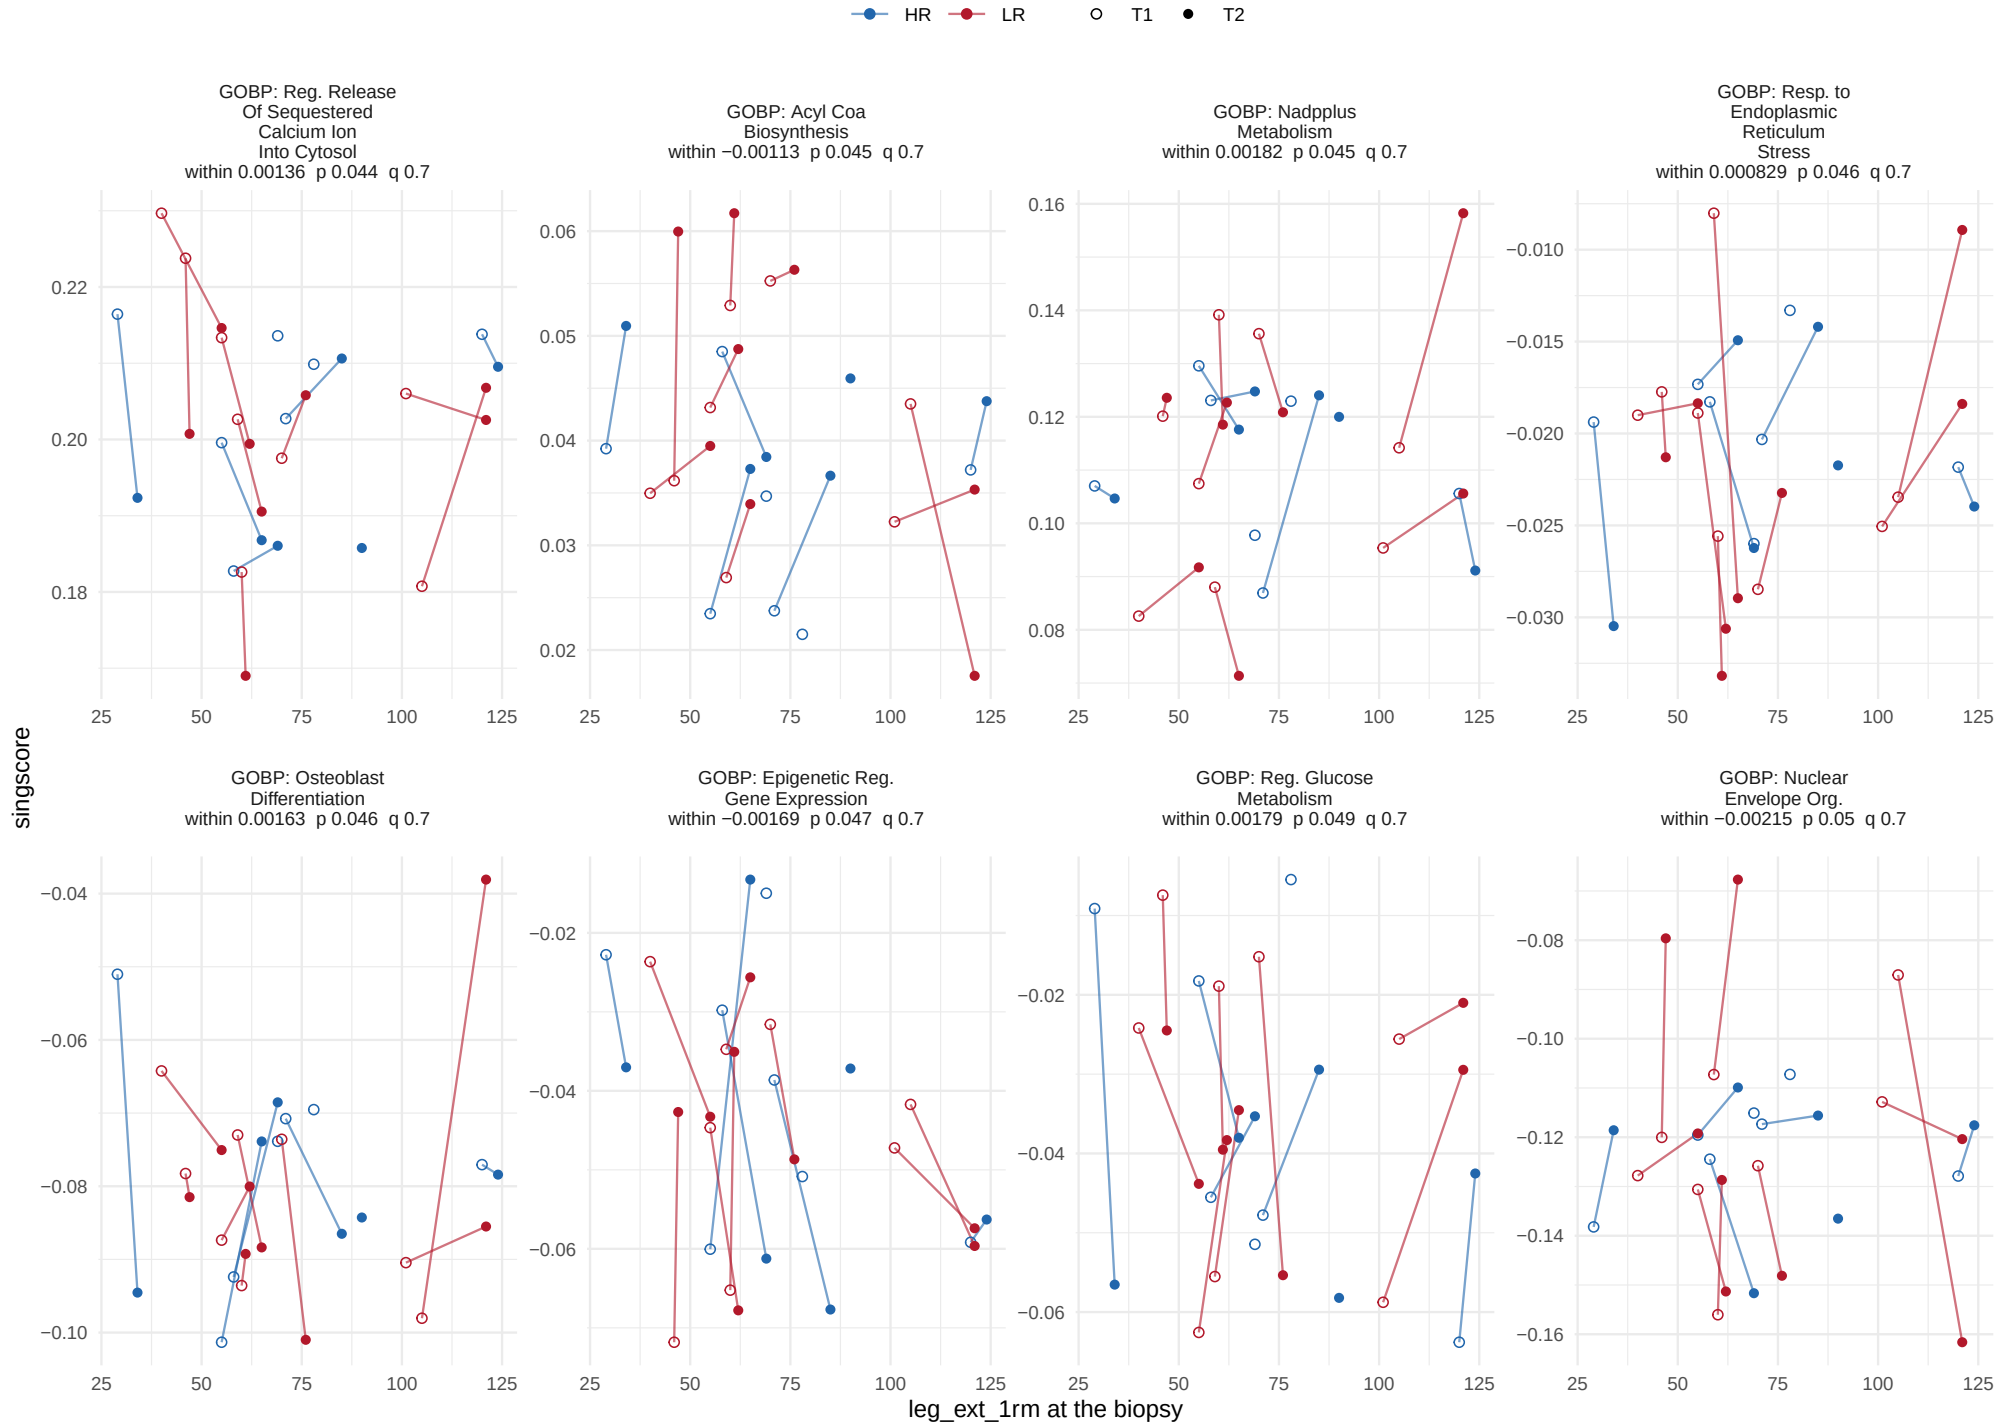

limma on 29 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

leg_press_1rm, between−person term


57 of 1378 sets at p < 0.05, 0 at BH < 0.05.

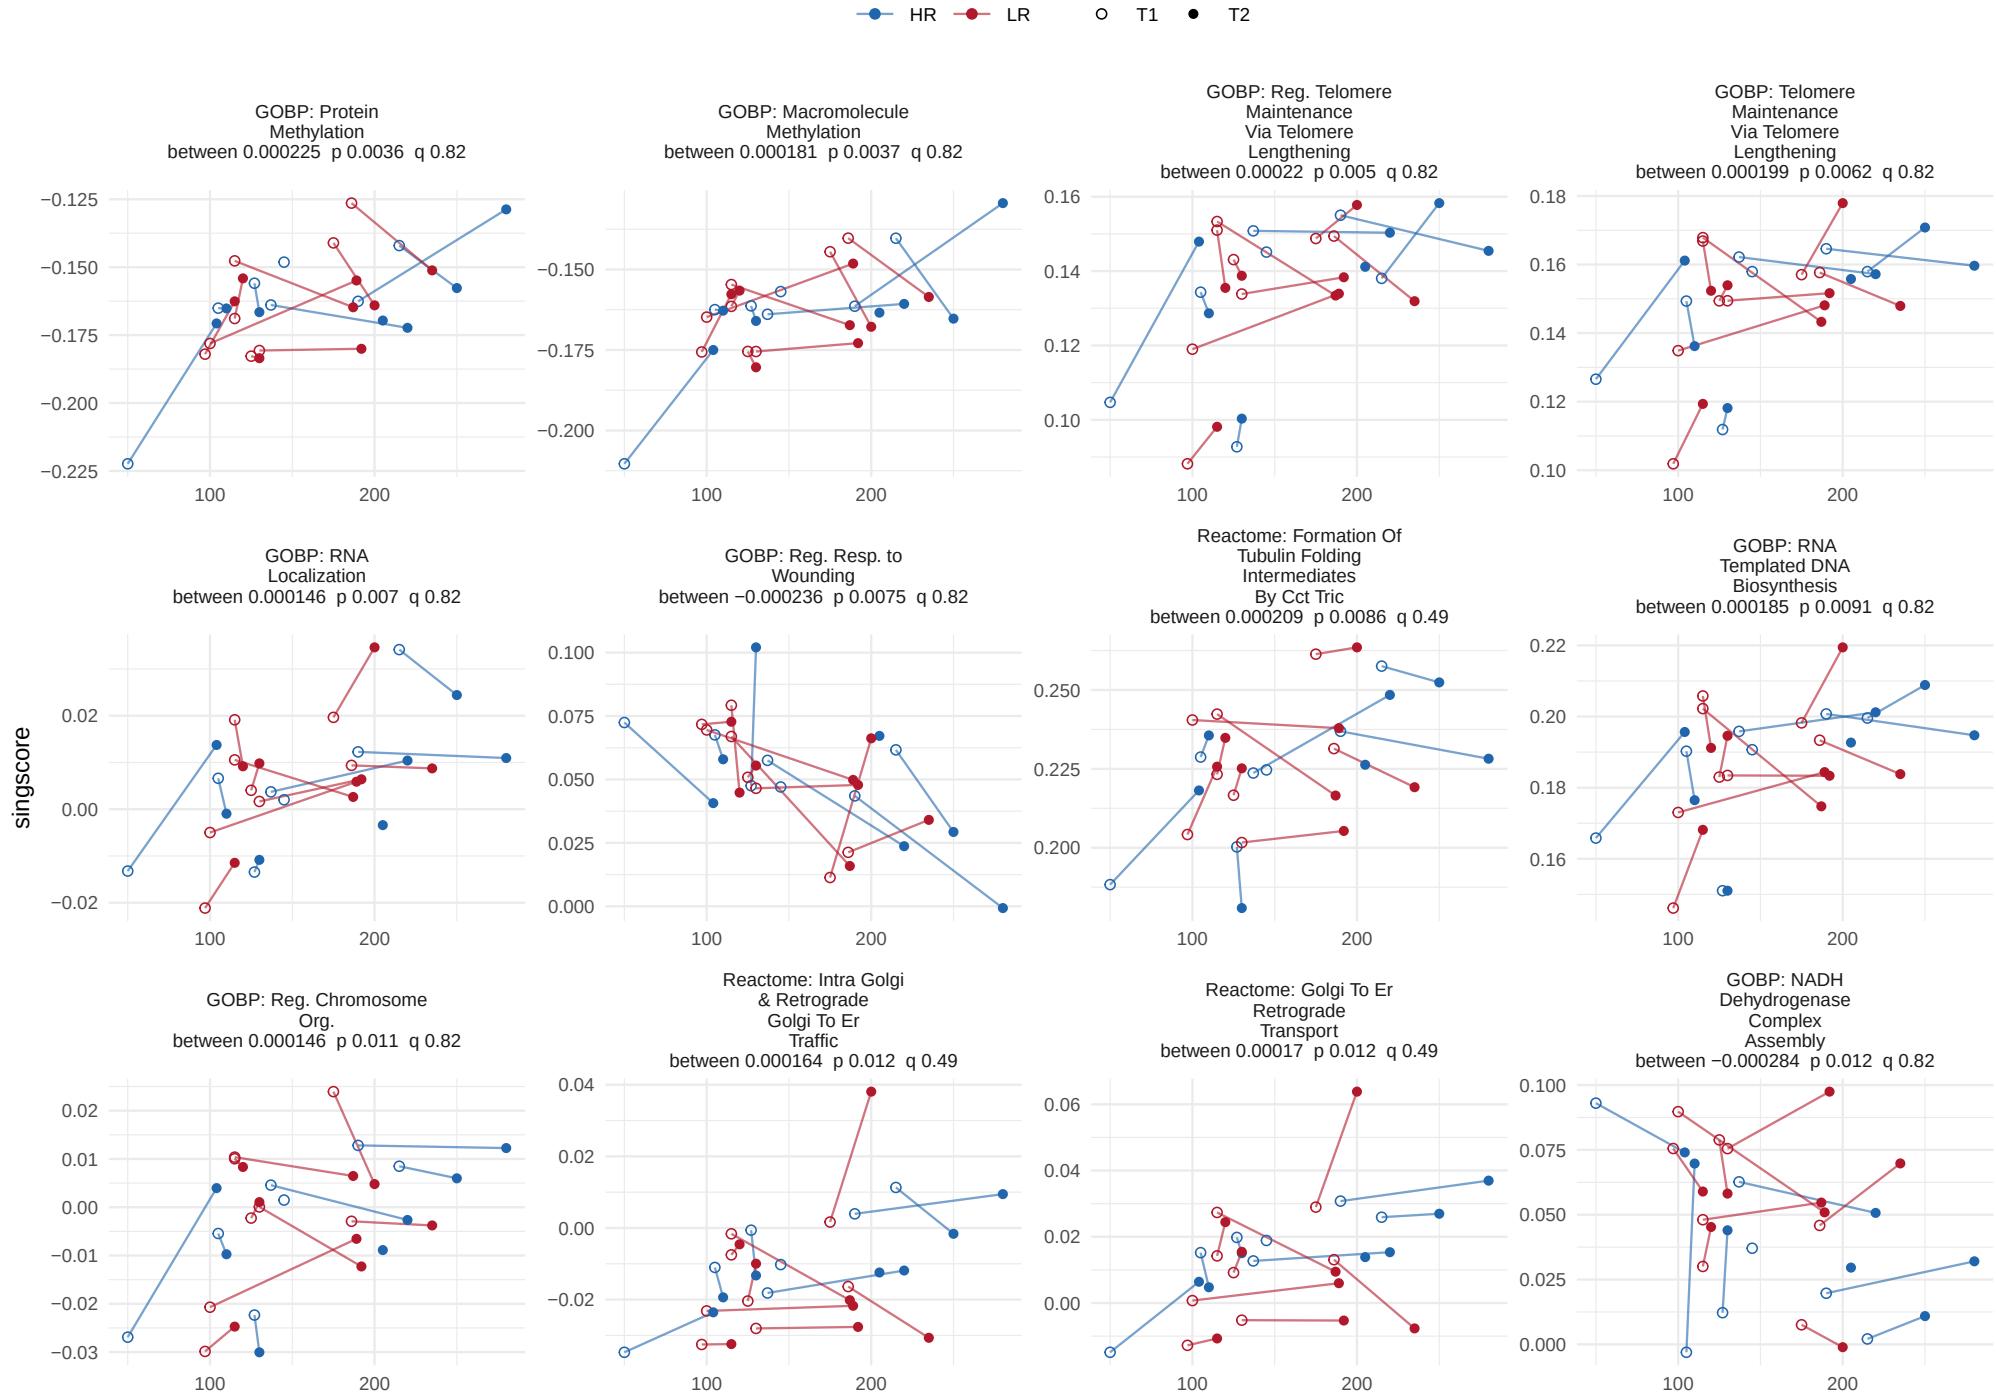

limma on 30 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

leg_press_1rm, between−person term


57 of 1378 sets at p < 0.05, 0 at BH < 0.05.

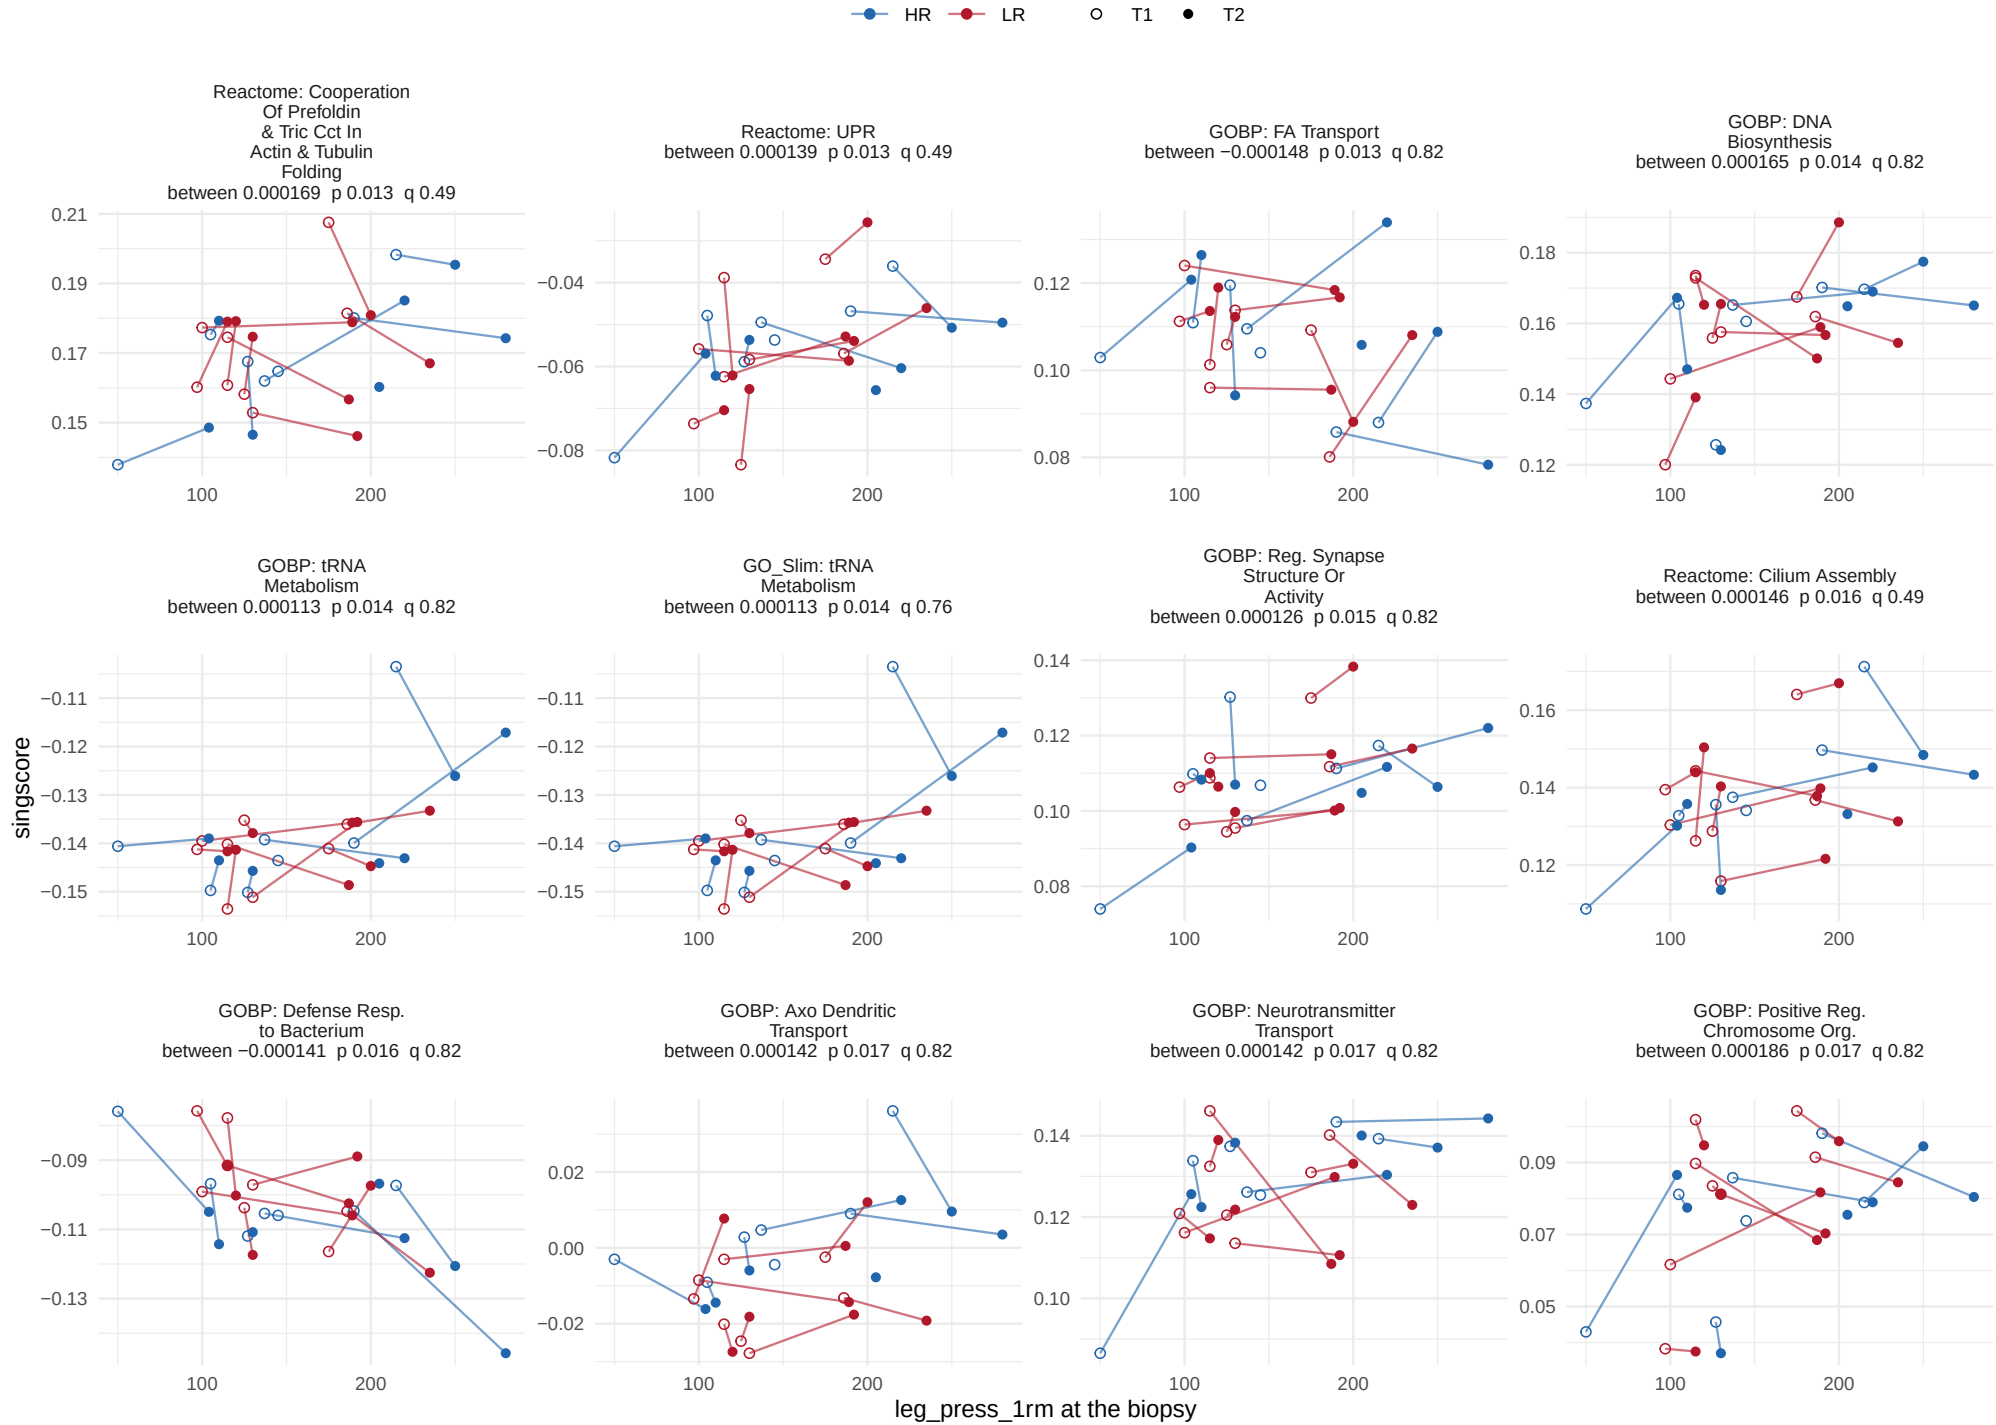

limma on 30 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

leg_press_1rm, between−person term


57 of 1378 sets at p < 0.05, 0 at BH < 0.05.

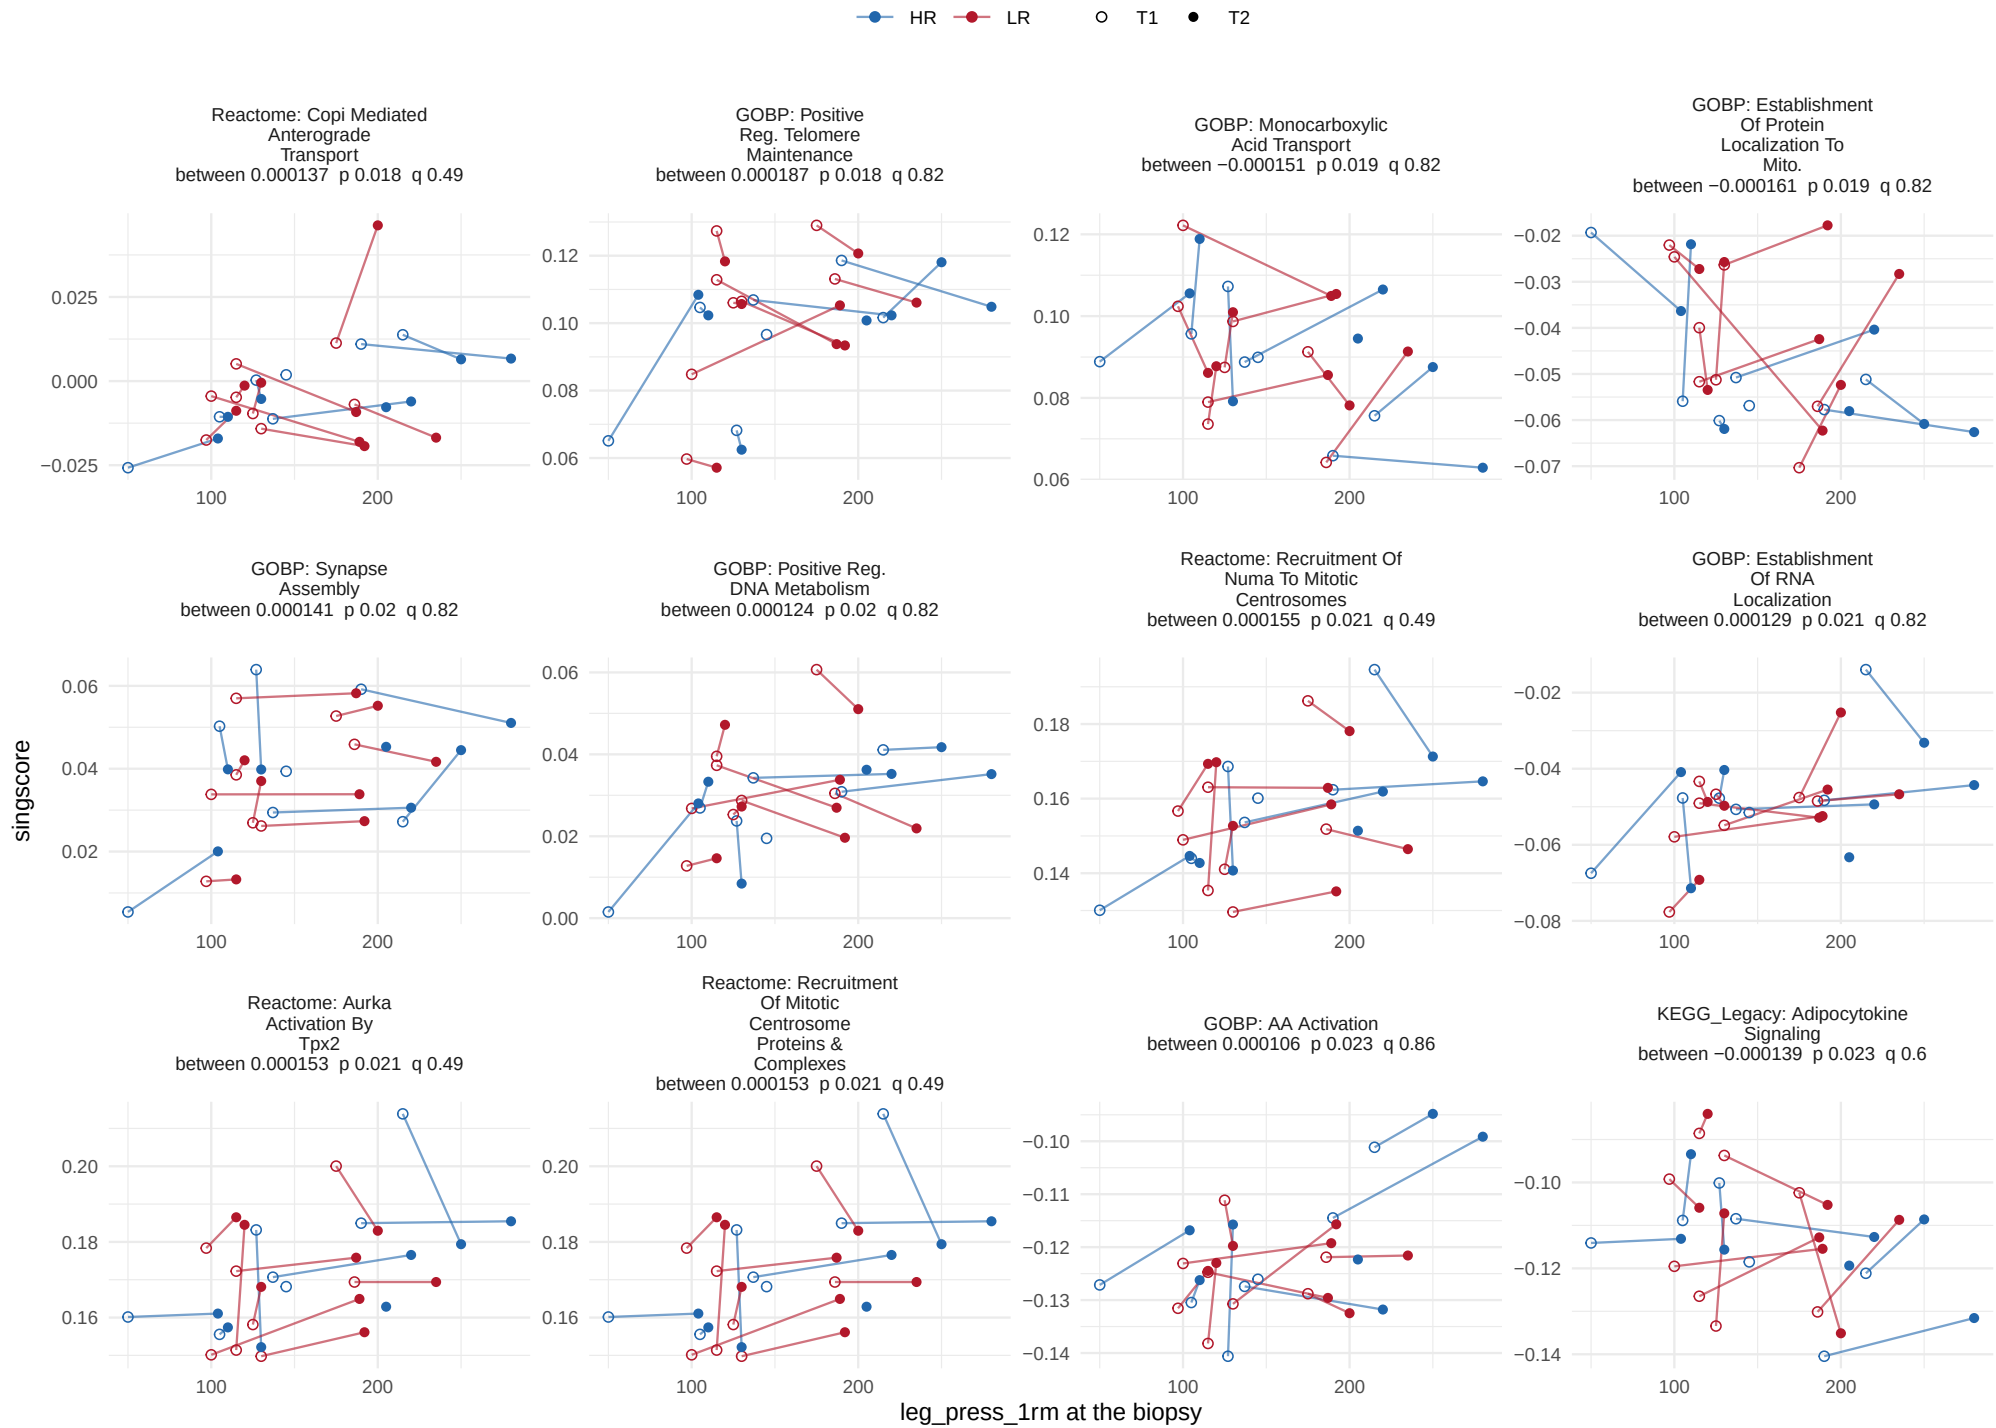

limma on 30 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

leg_press_1rm, between−person term


57 of 1378 sets at p < 0.05, 0 at BH < 0.05.

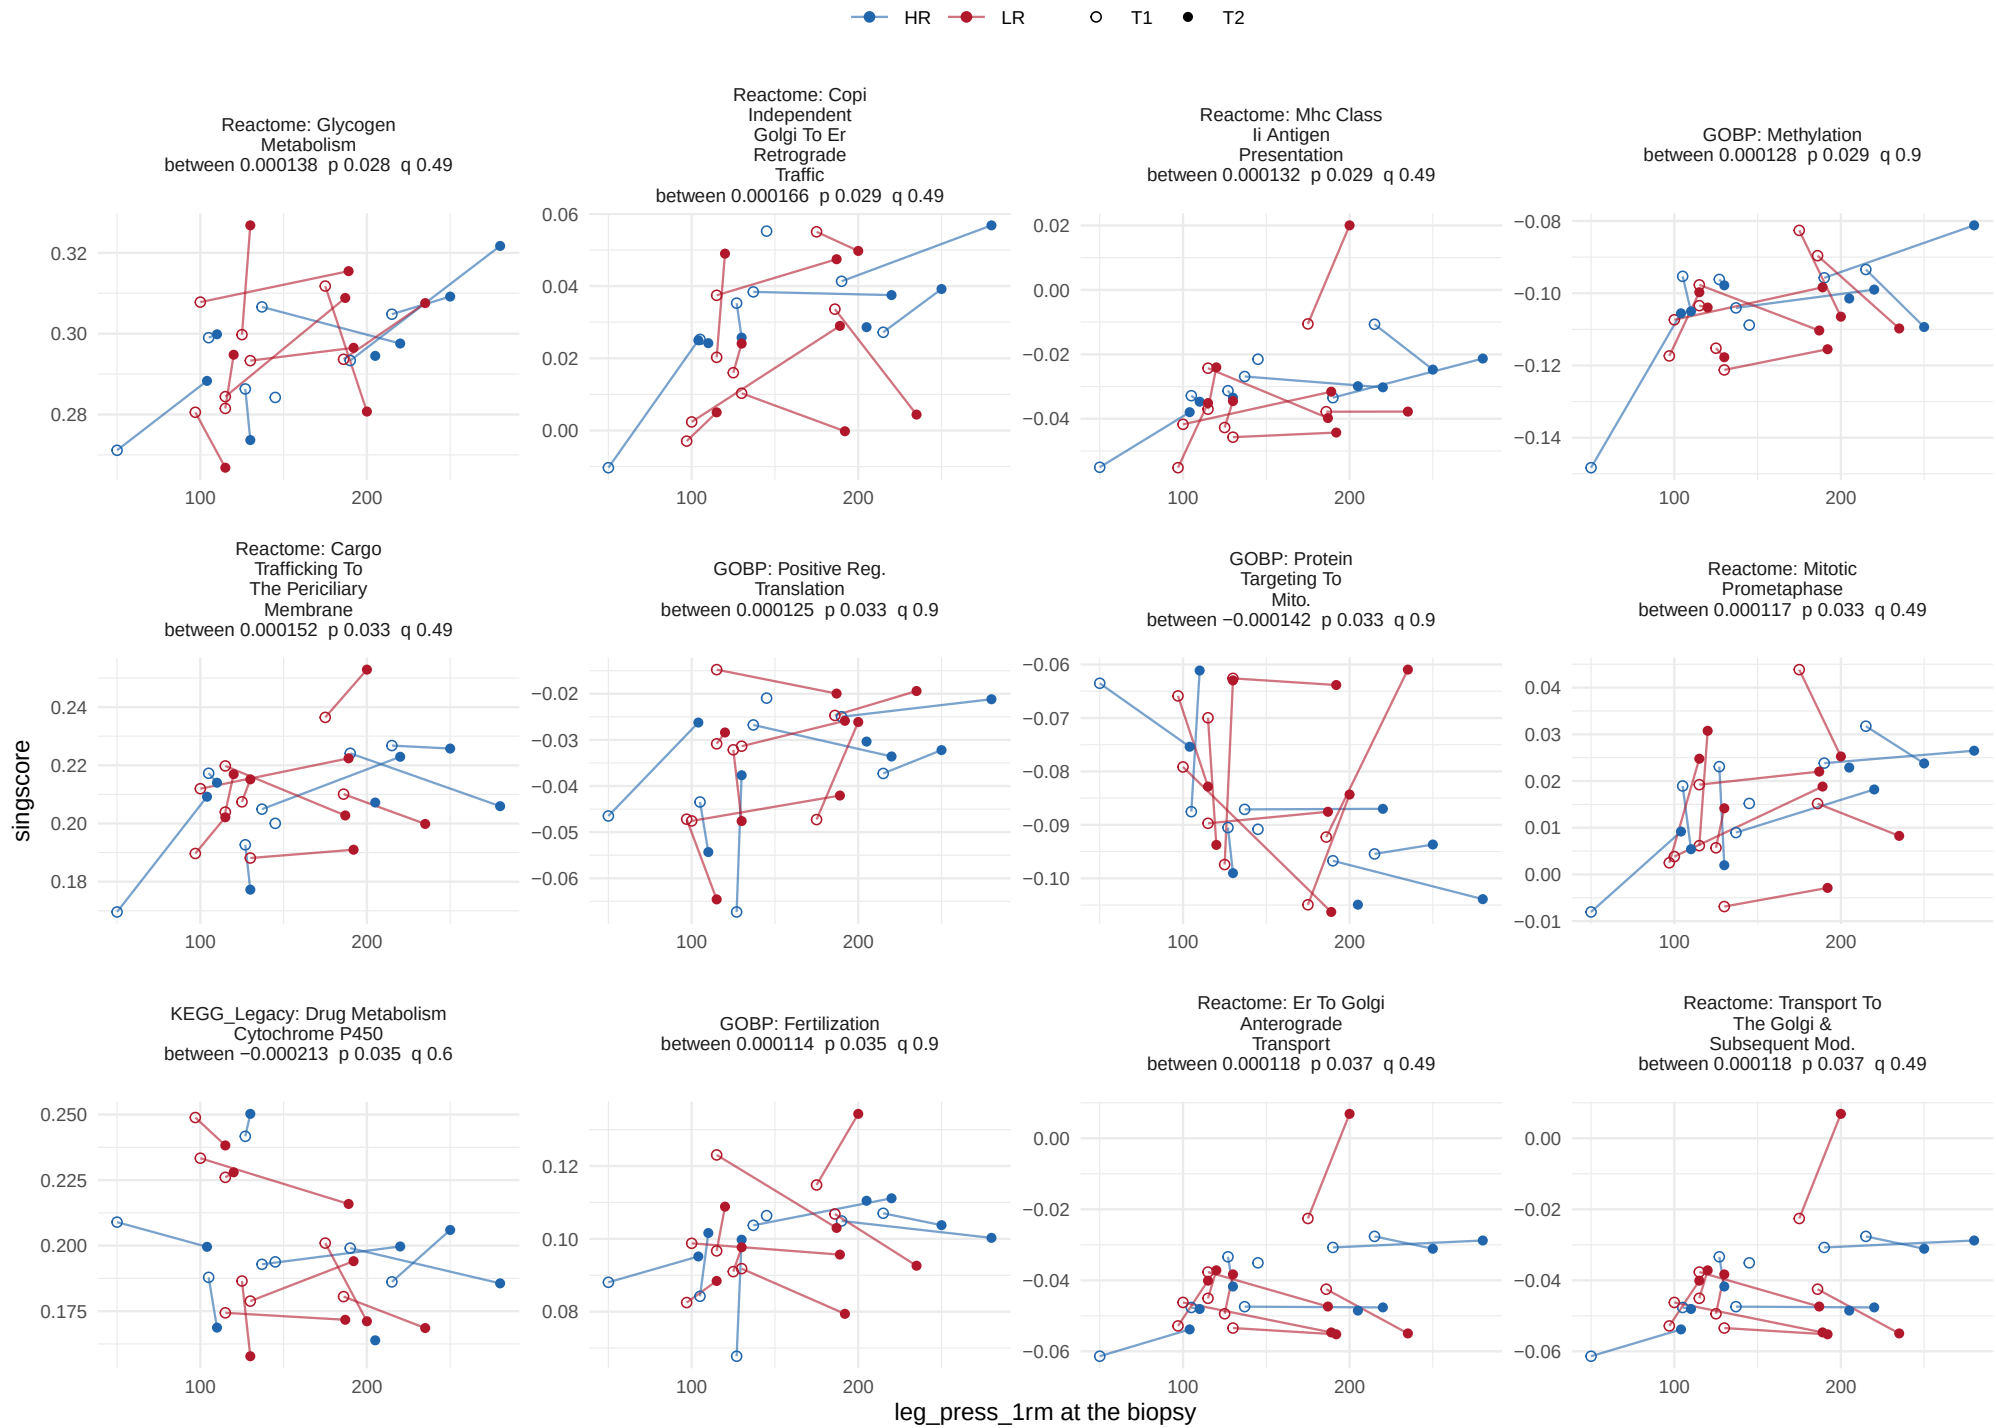

limma on 30 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

leg_press_1rm, between−person term


57 of 1378 sets at p < 0.05, 0 at BH < 0.05.

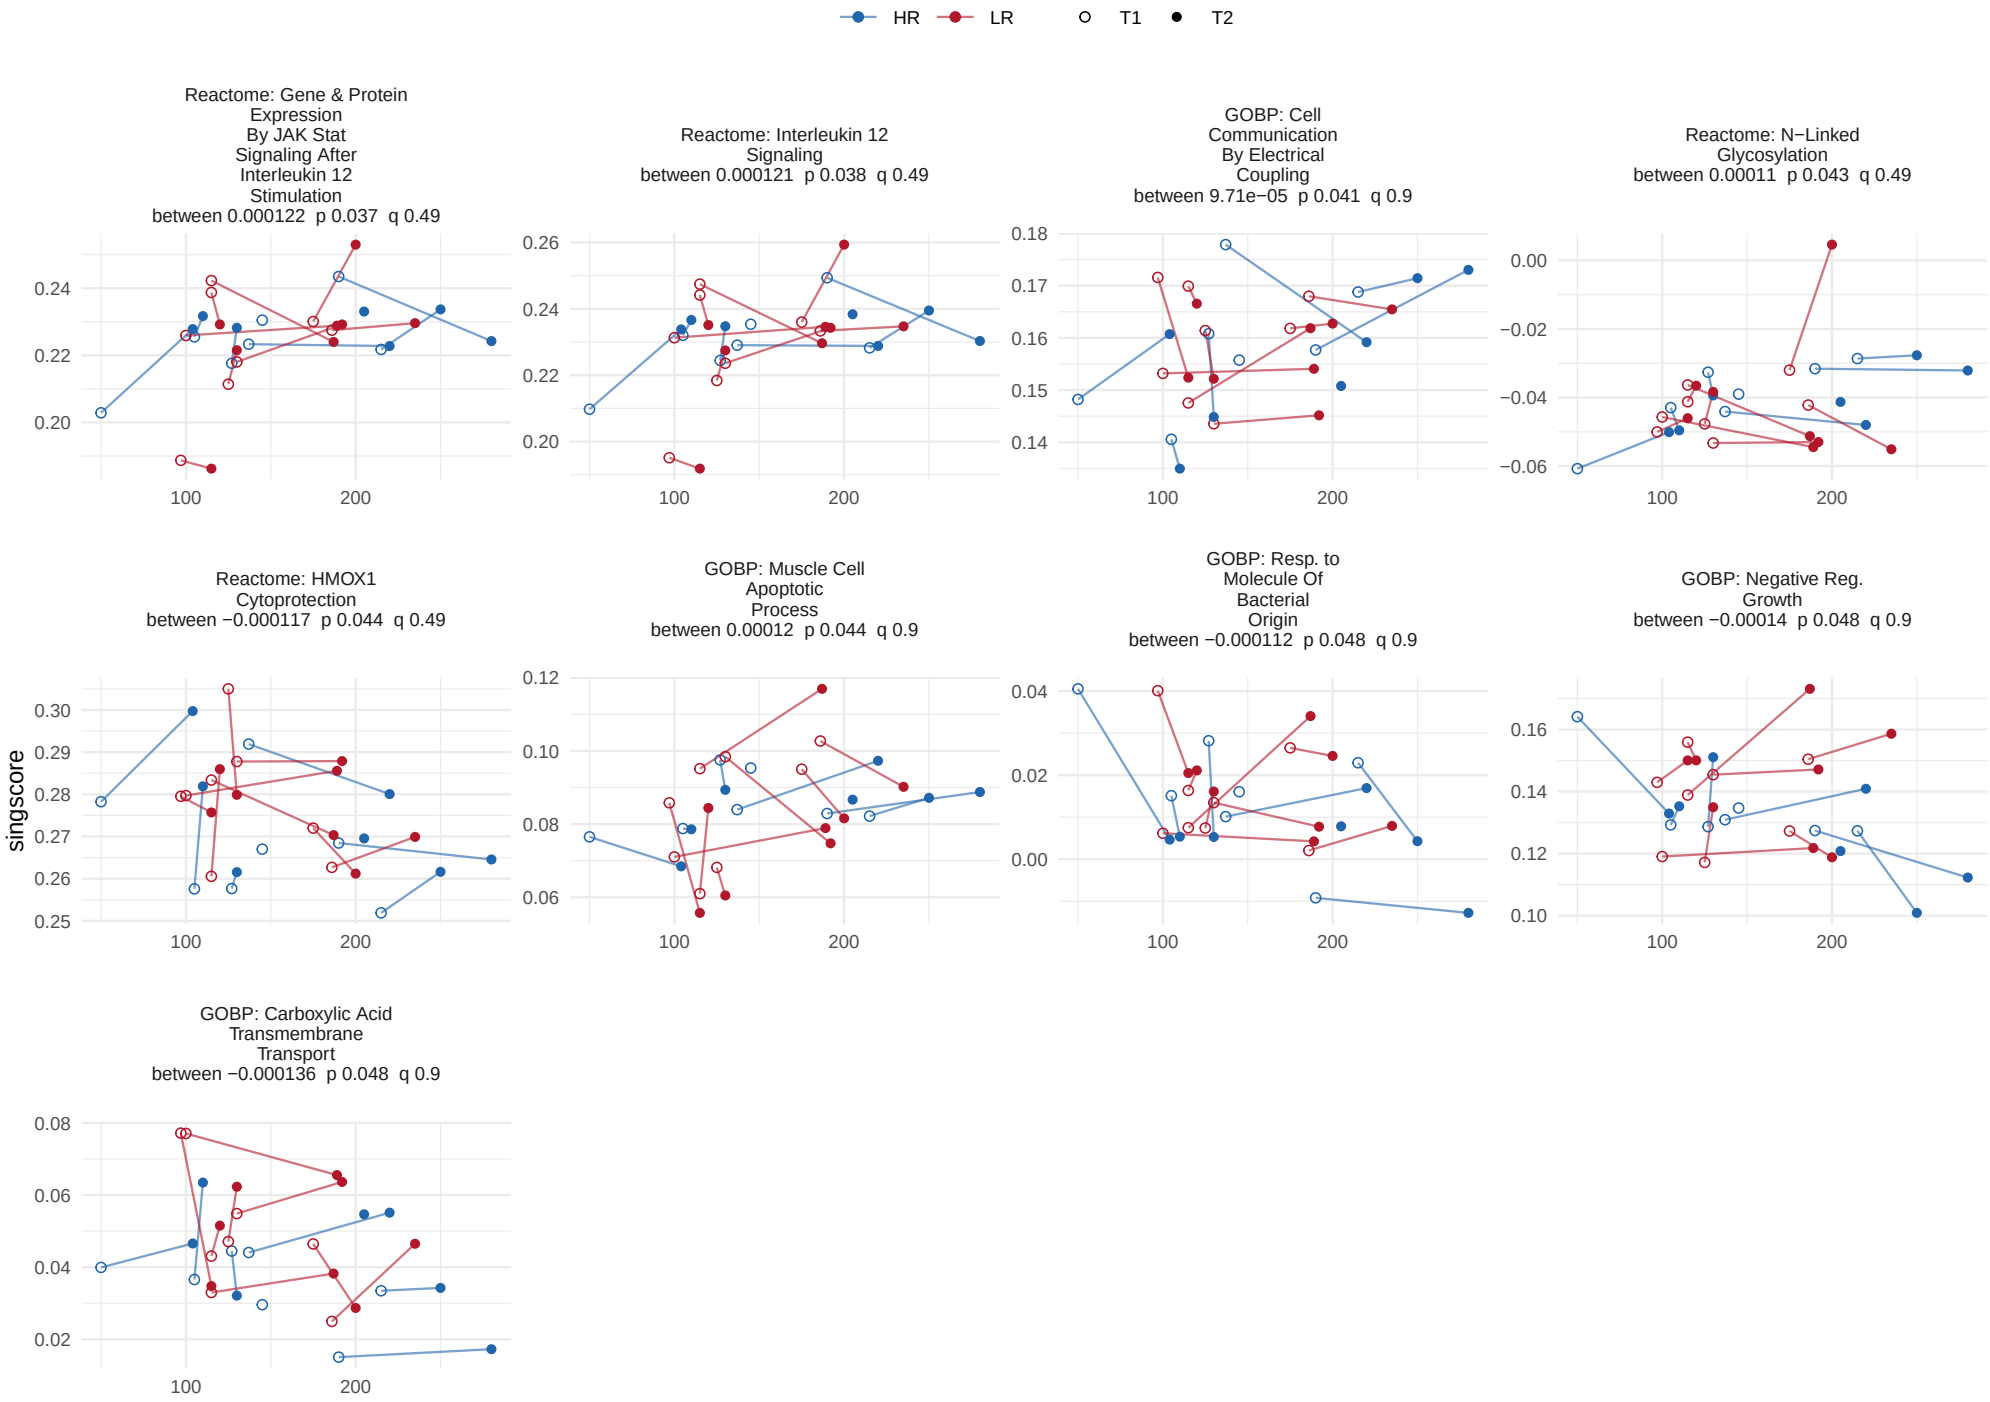

limma on 30 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

leg_press_1rm, within−person term


49 of 1378 sets at p < 0.05, 0 at BH < 0.05.

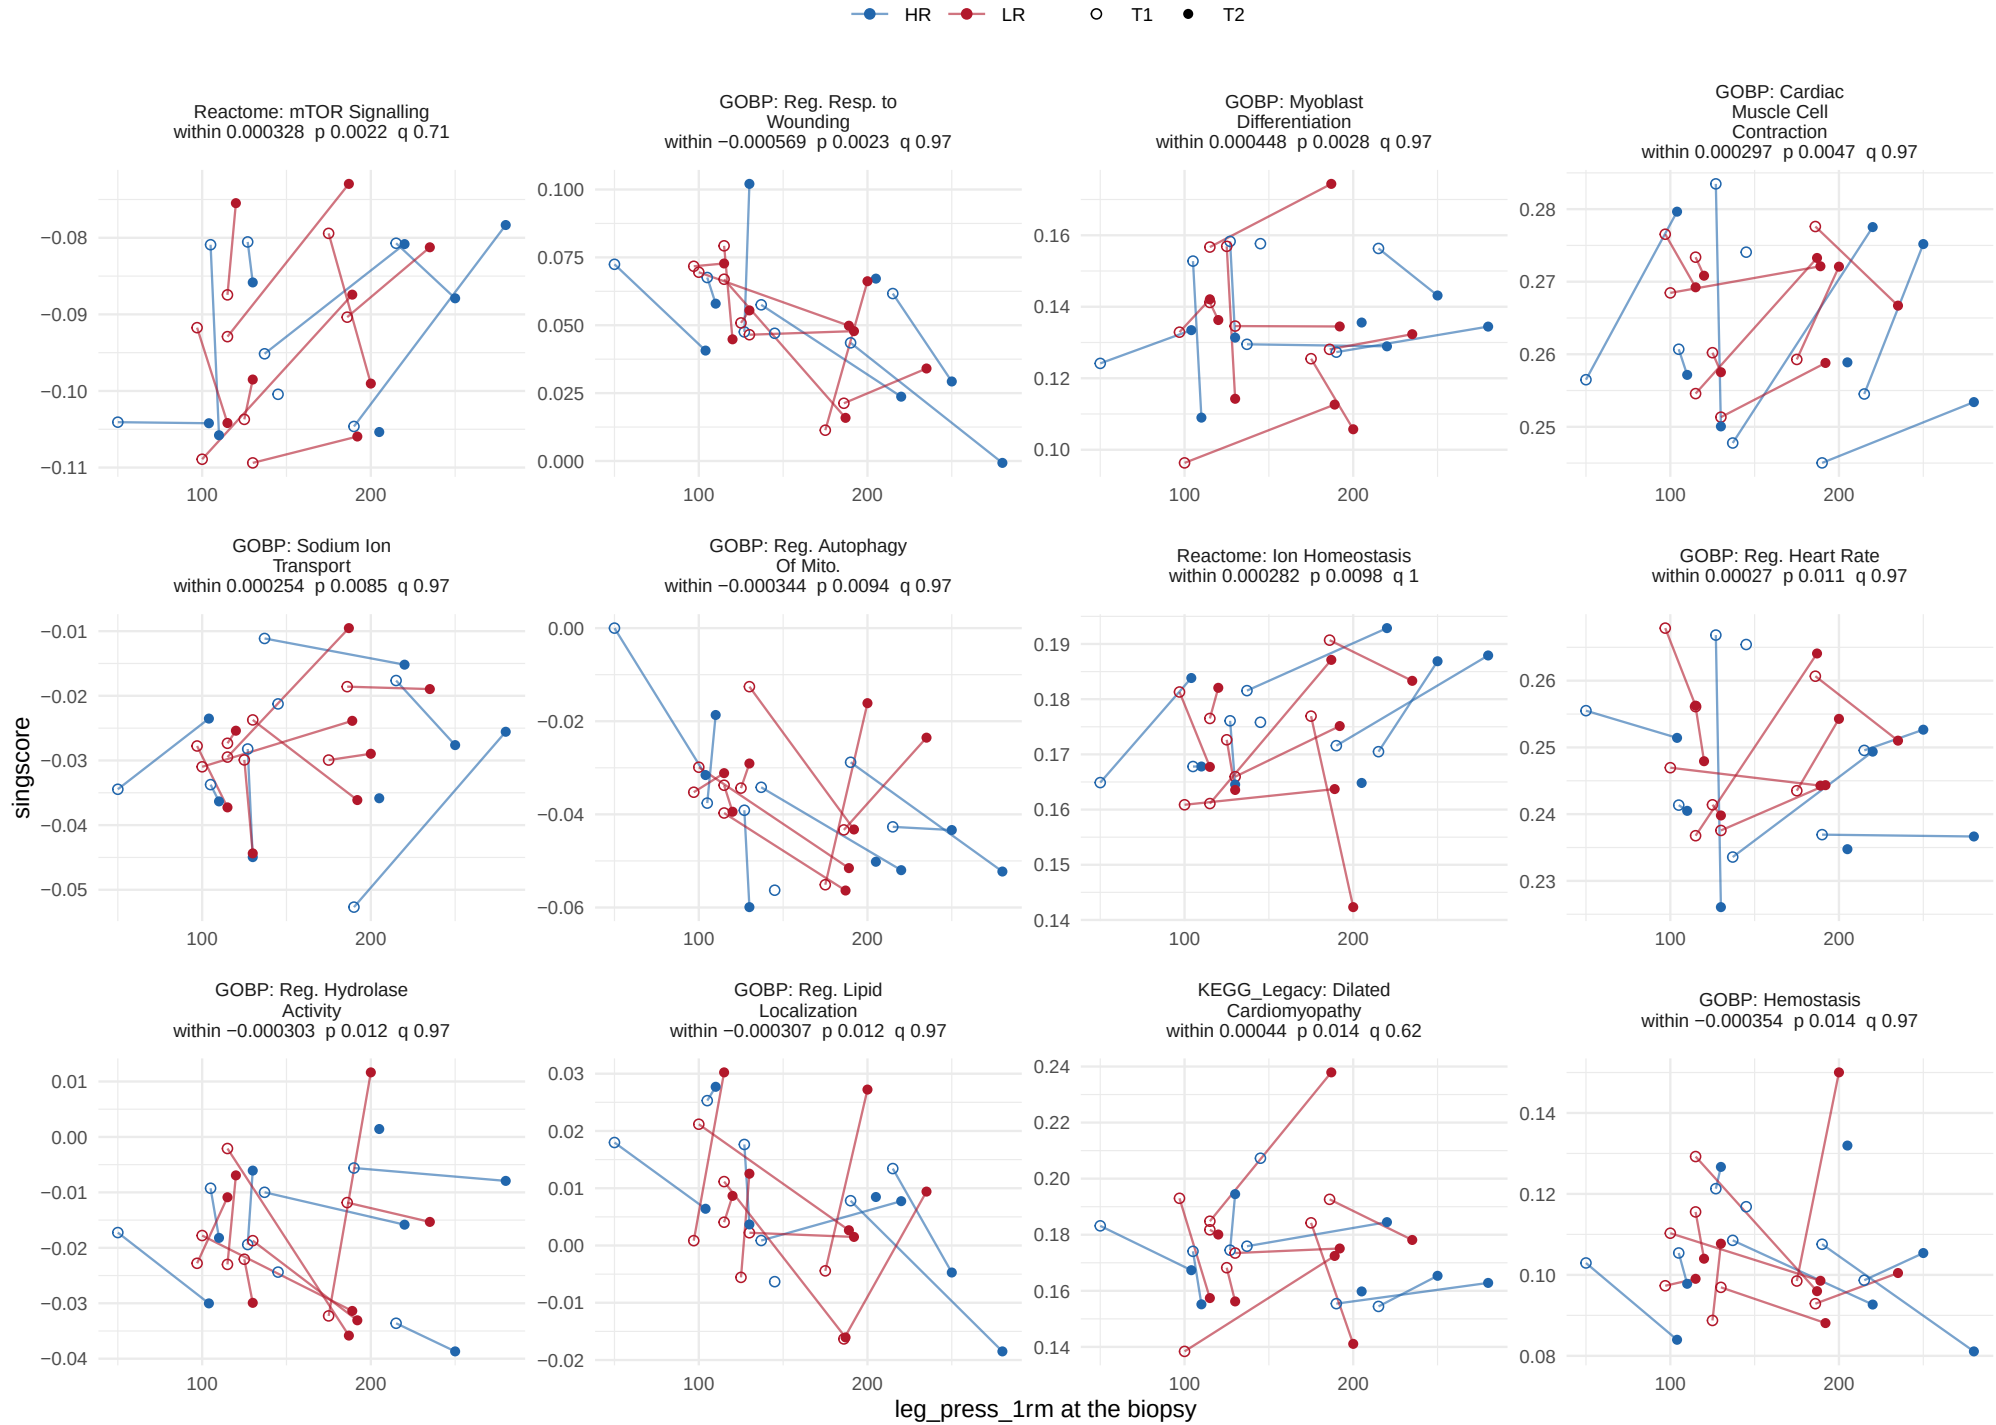

limma on 30 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

leg_press_1rm, within−person term


49 of 1378 sets at p < 0.05, 0 at BH < 0.05.

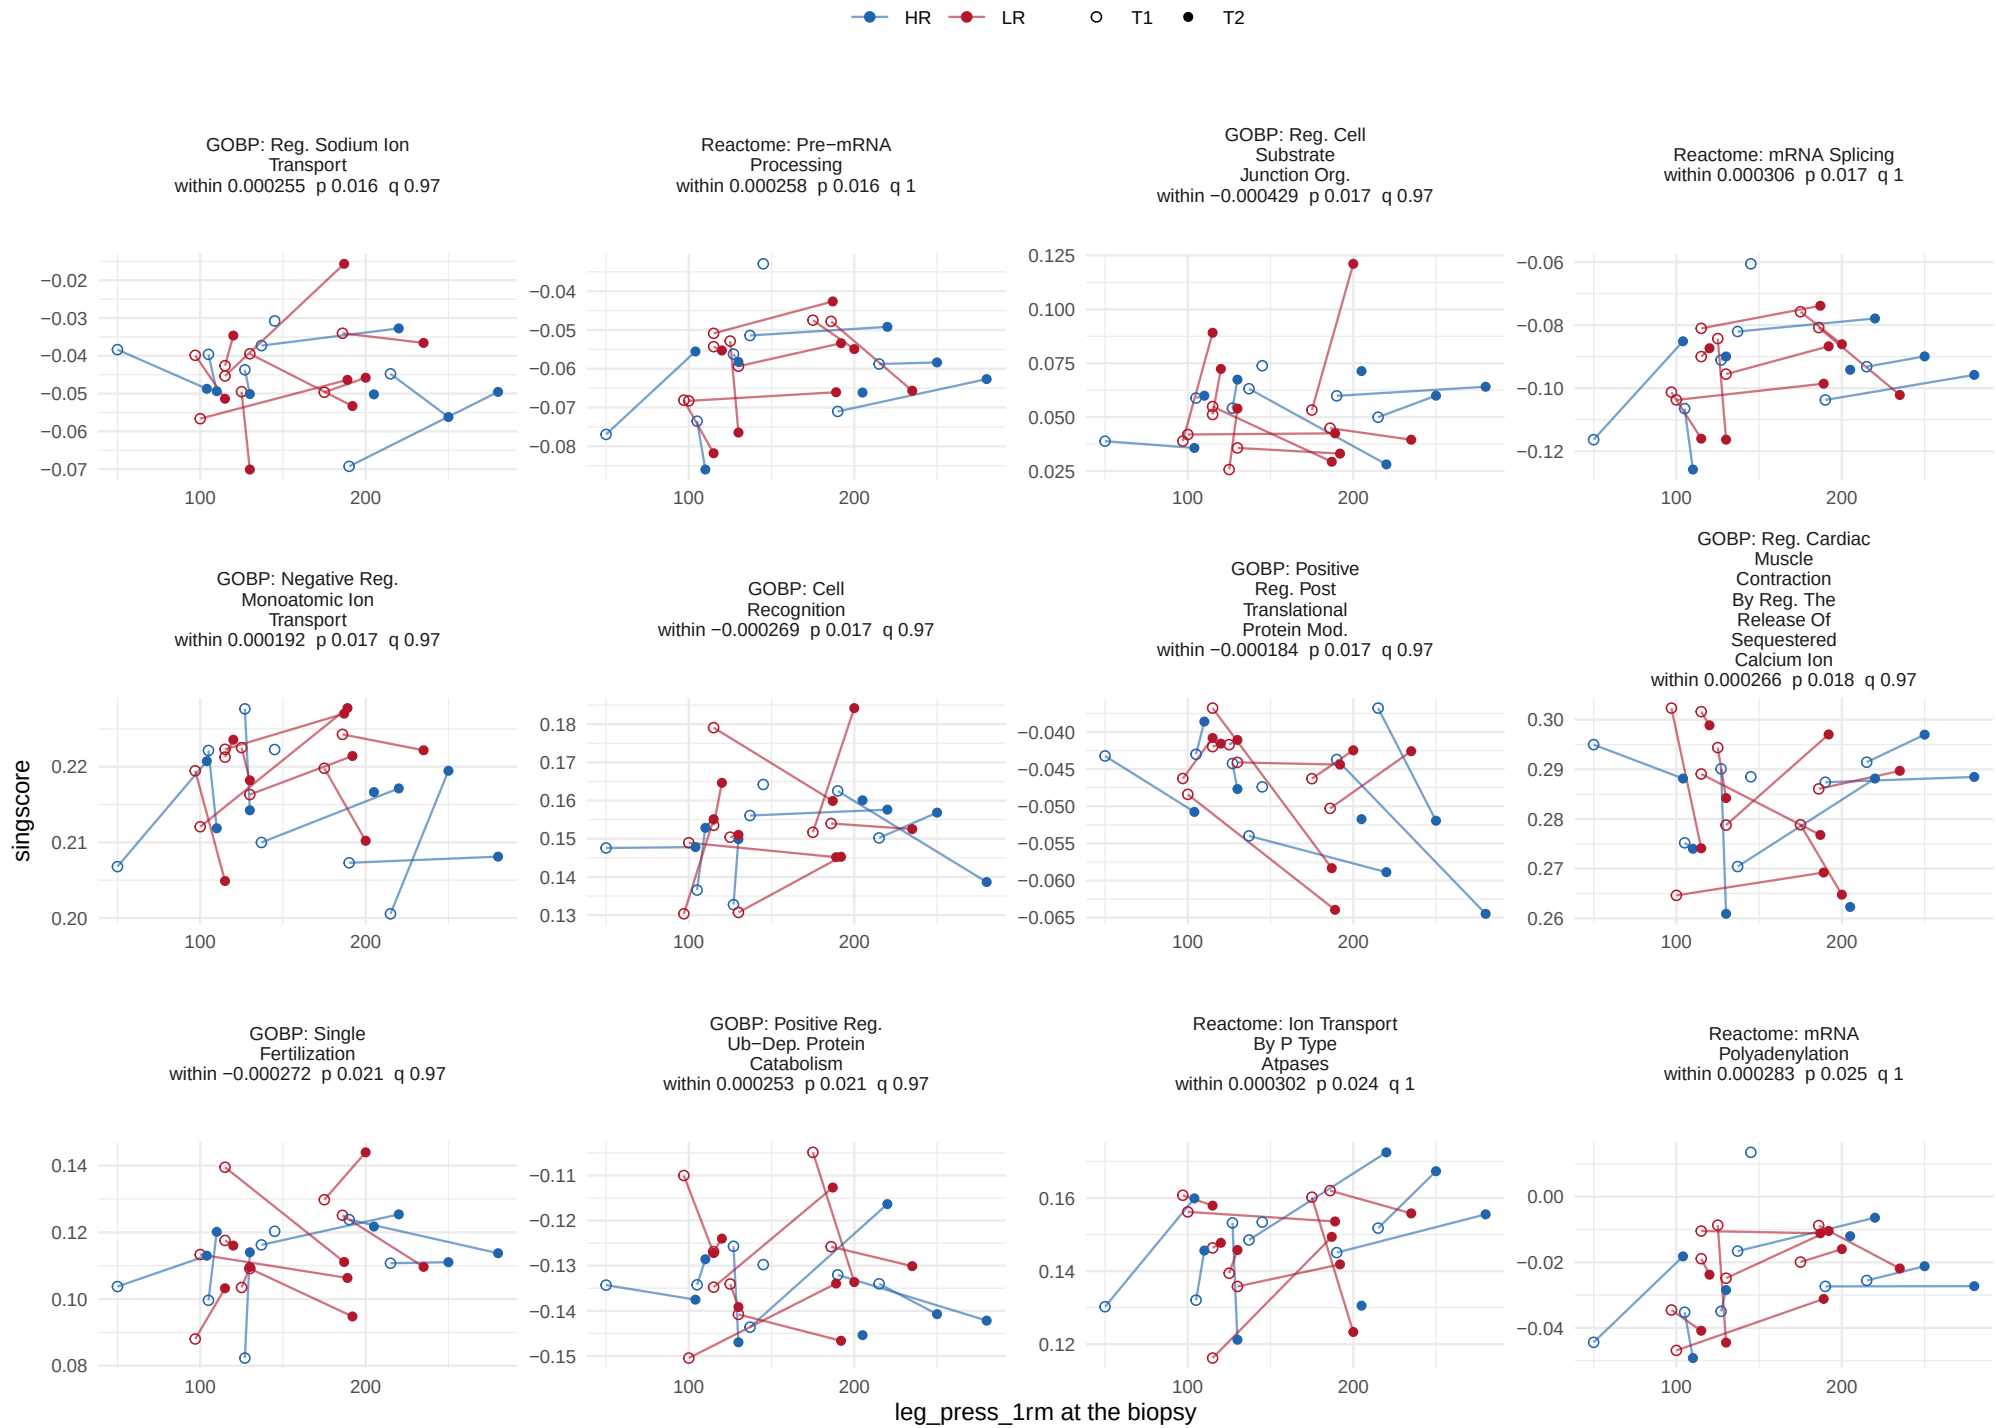

limma on 30 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

leg_press_1rm, within−person term


49 of 1378 sets at p < 0.05, 0 at BH < 0.05.

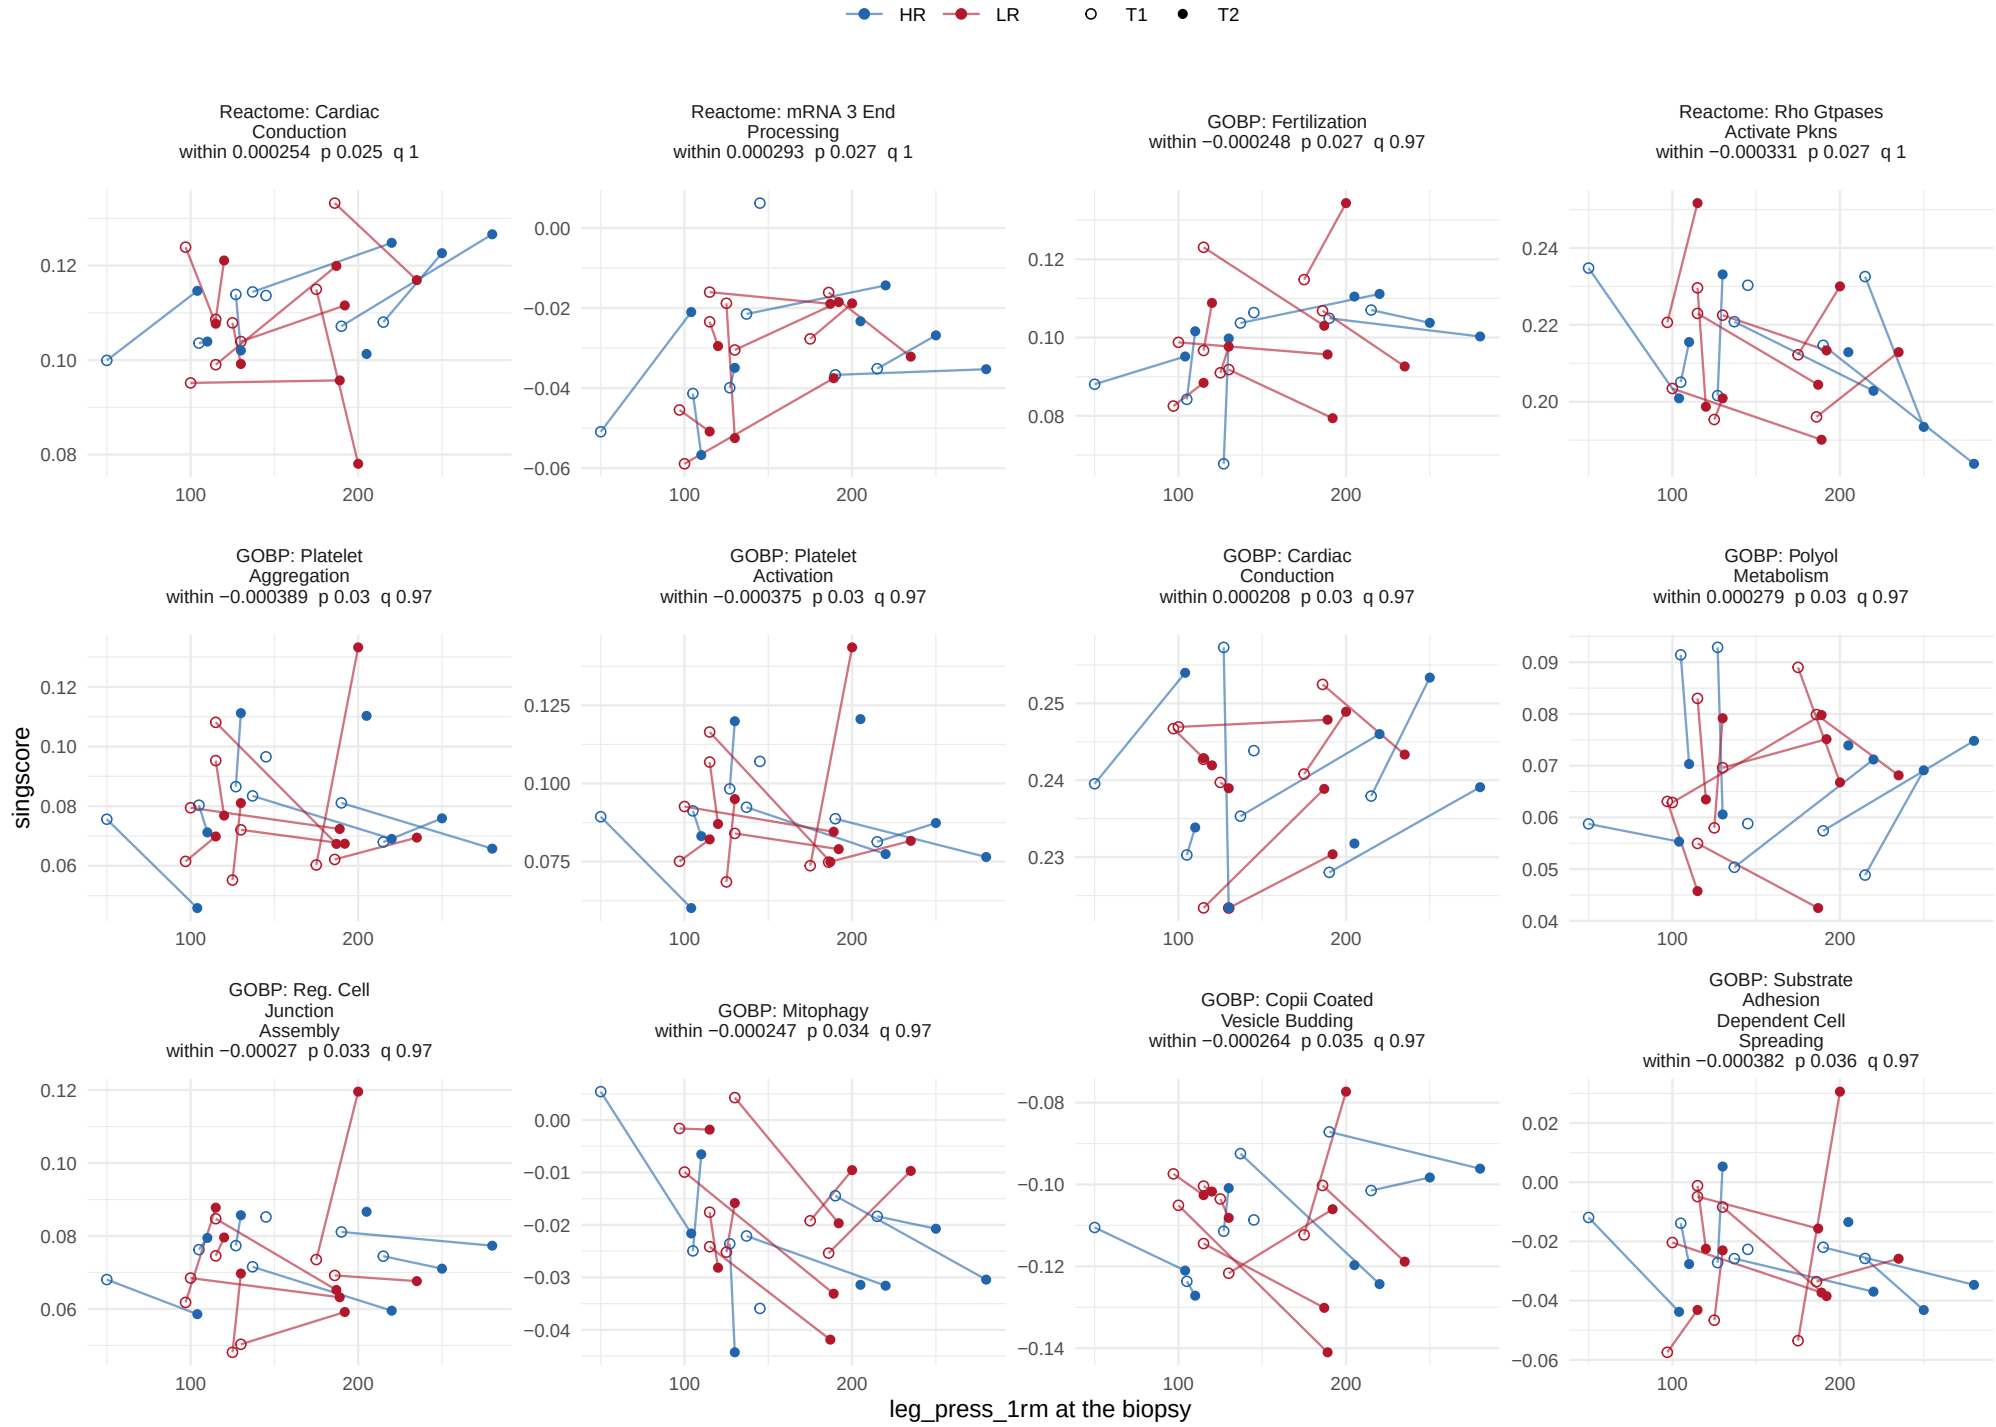

limma on 30 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

leg_press_1rm, within−person term


49 of 1378 sets at p < 0.05, 0 at BH < 0.05.

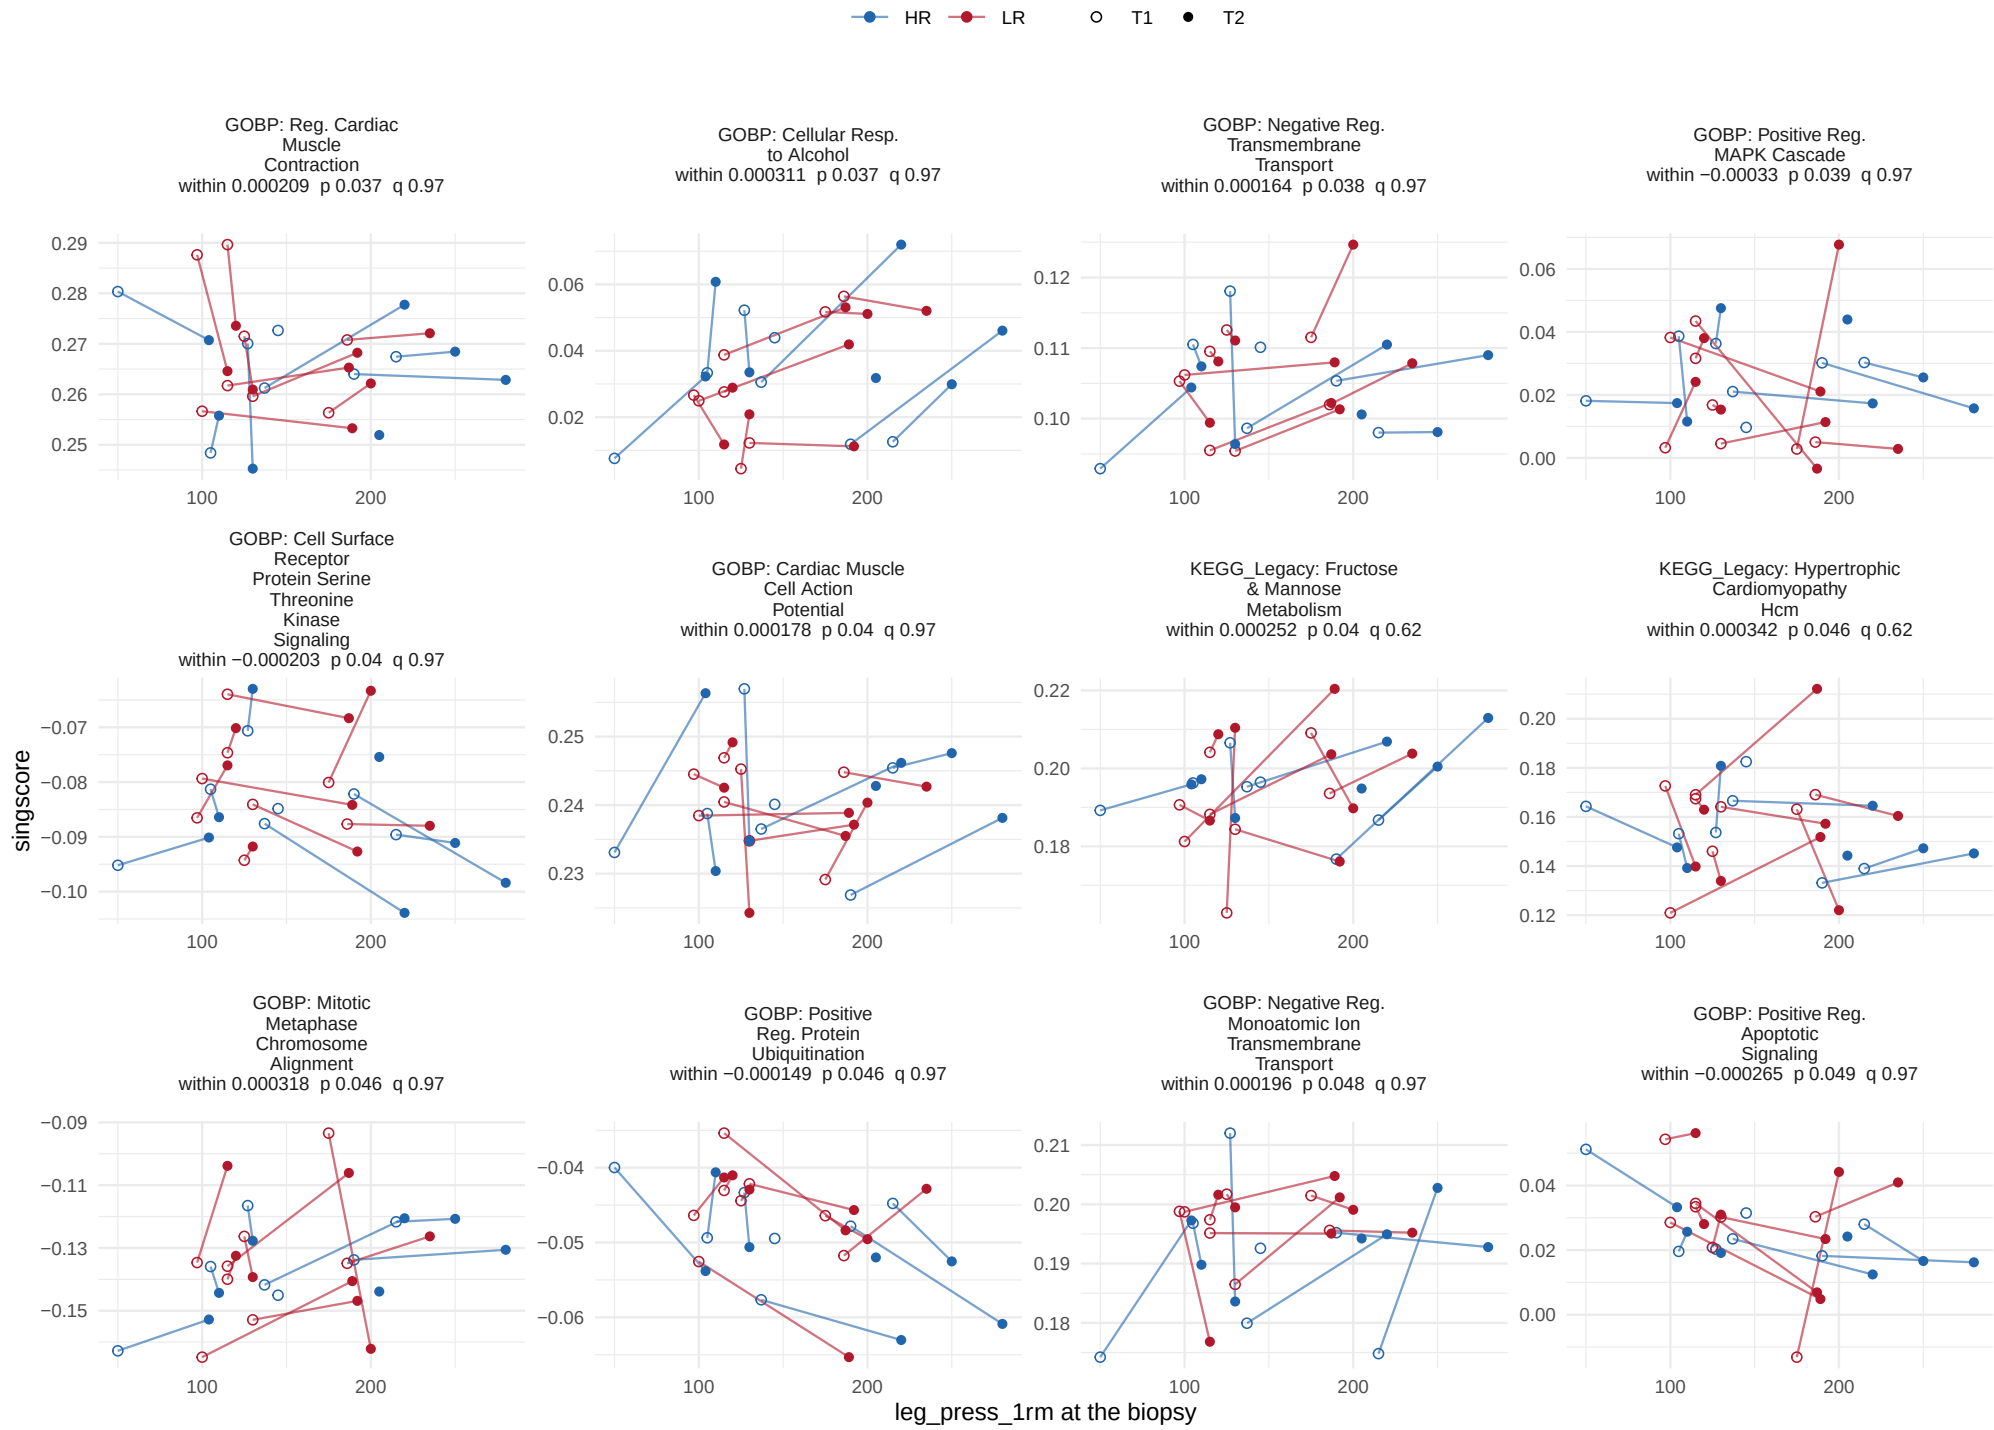

limma on 30 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

leg_press_1rm, within−person term


49 of 1378 sets at p < 0.05, 0 at BH < 0.05.

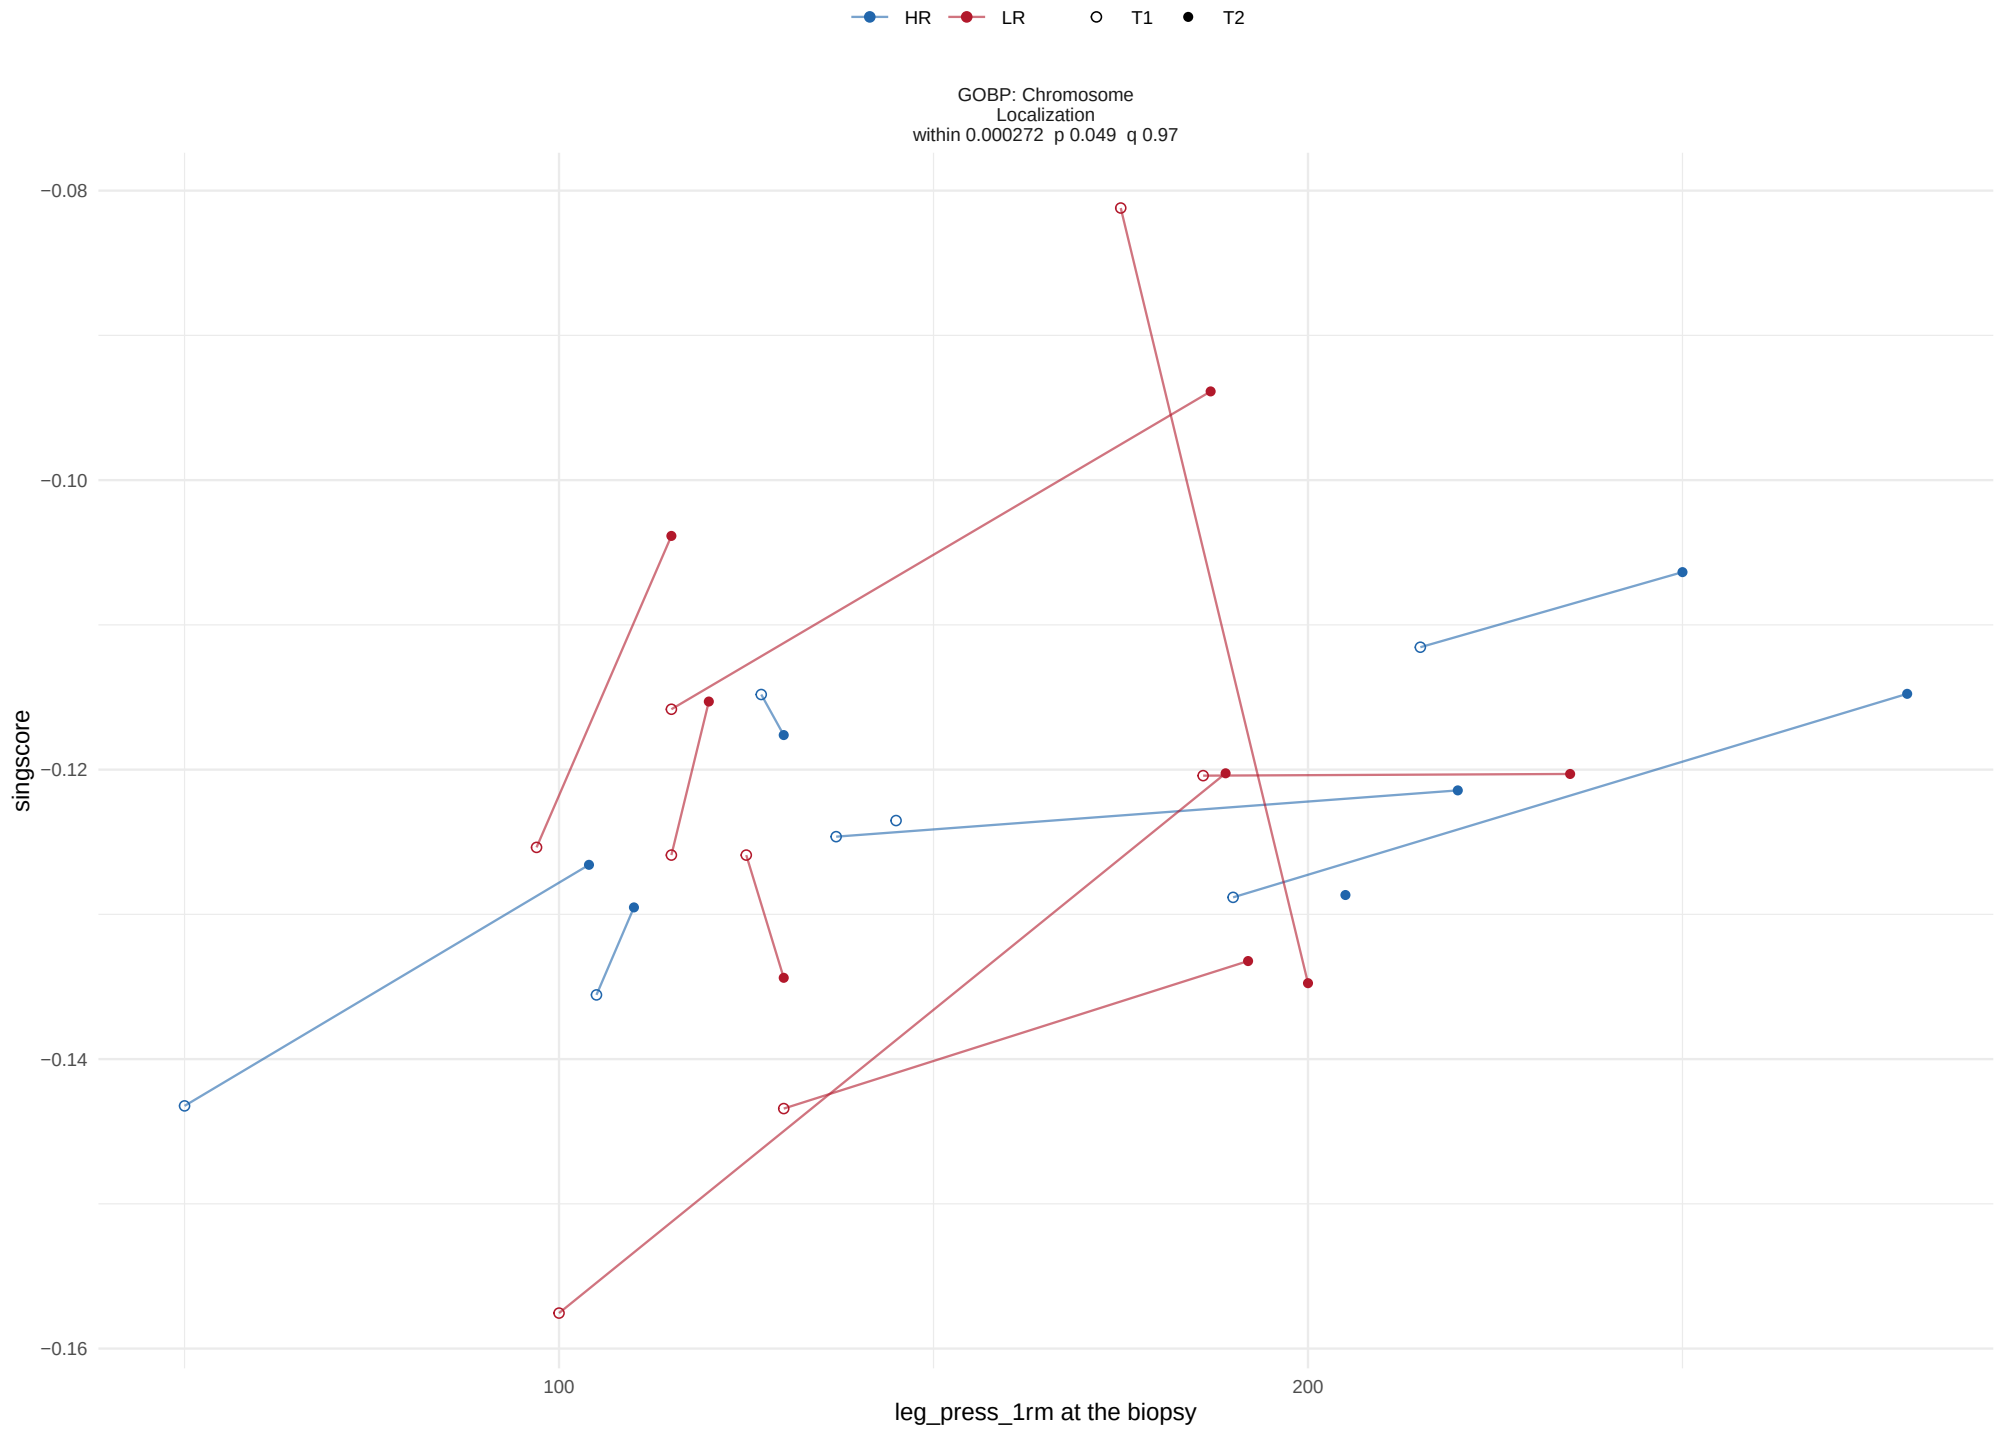

limma on 30 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

mcsa, between−person term


140 of 1378 sets at p < 0.05, 0 at BH < 0.05.

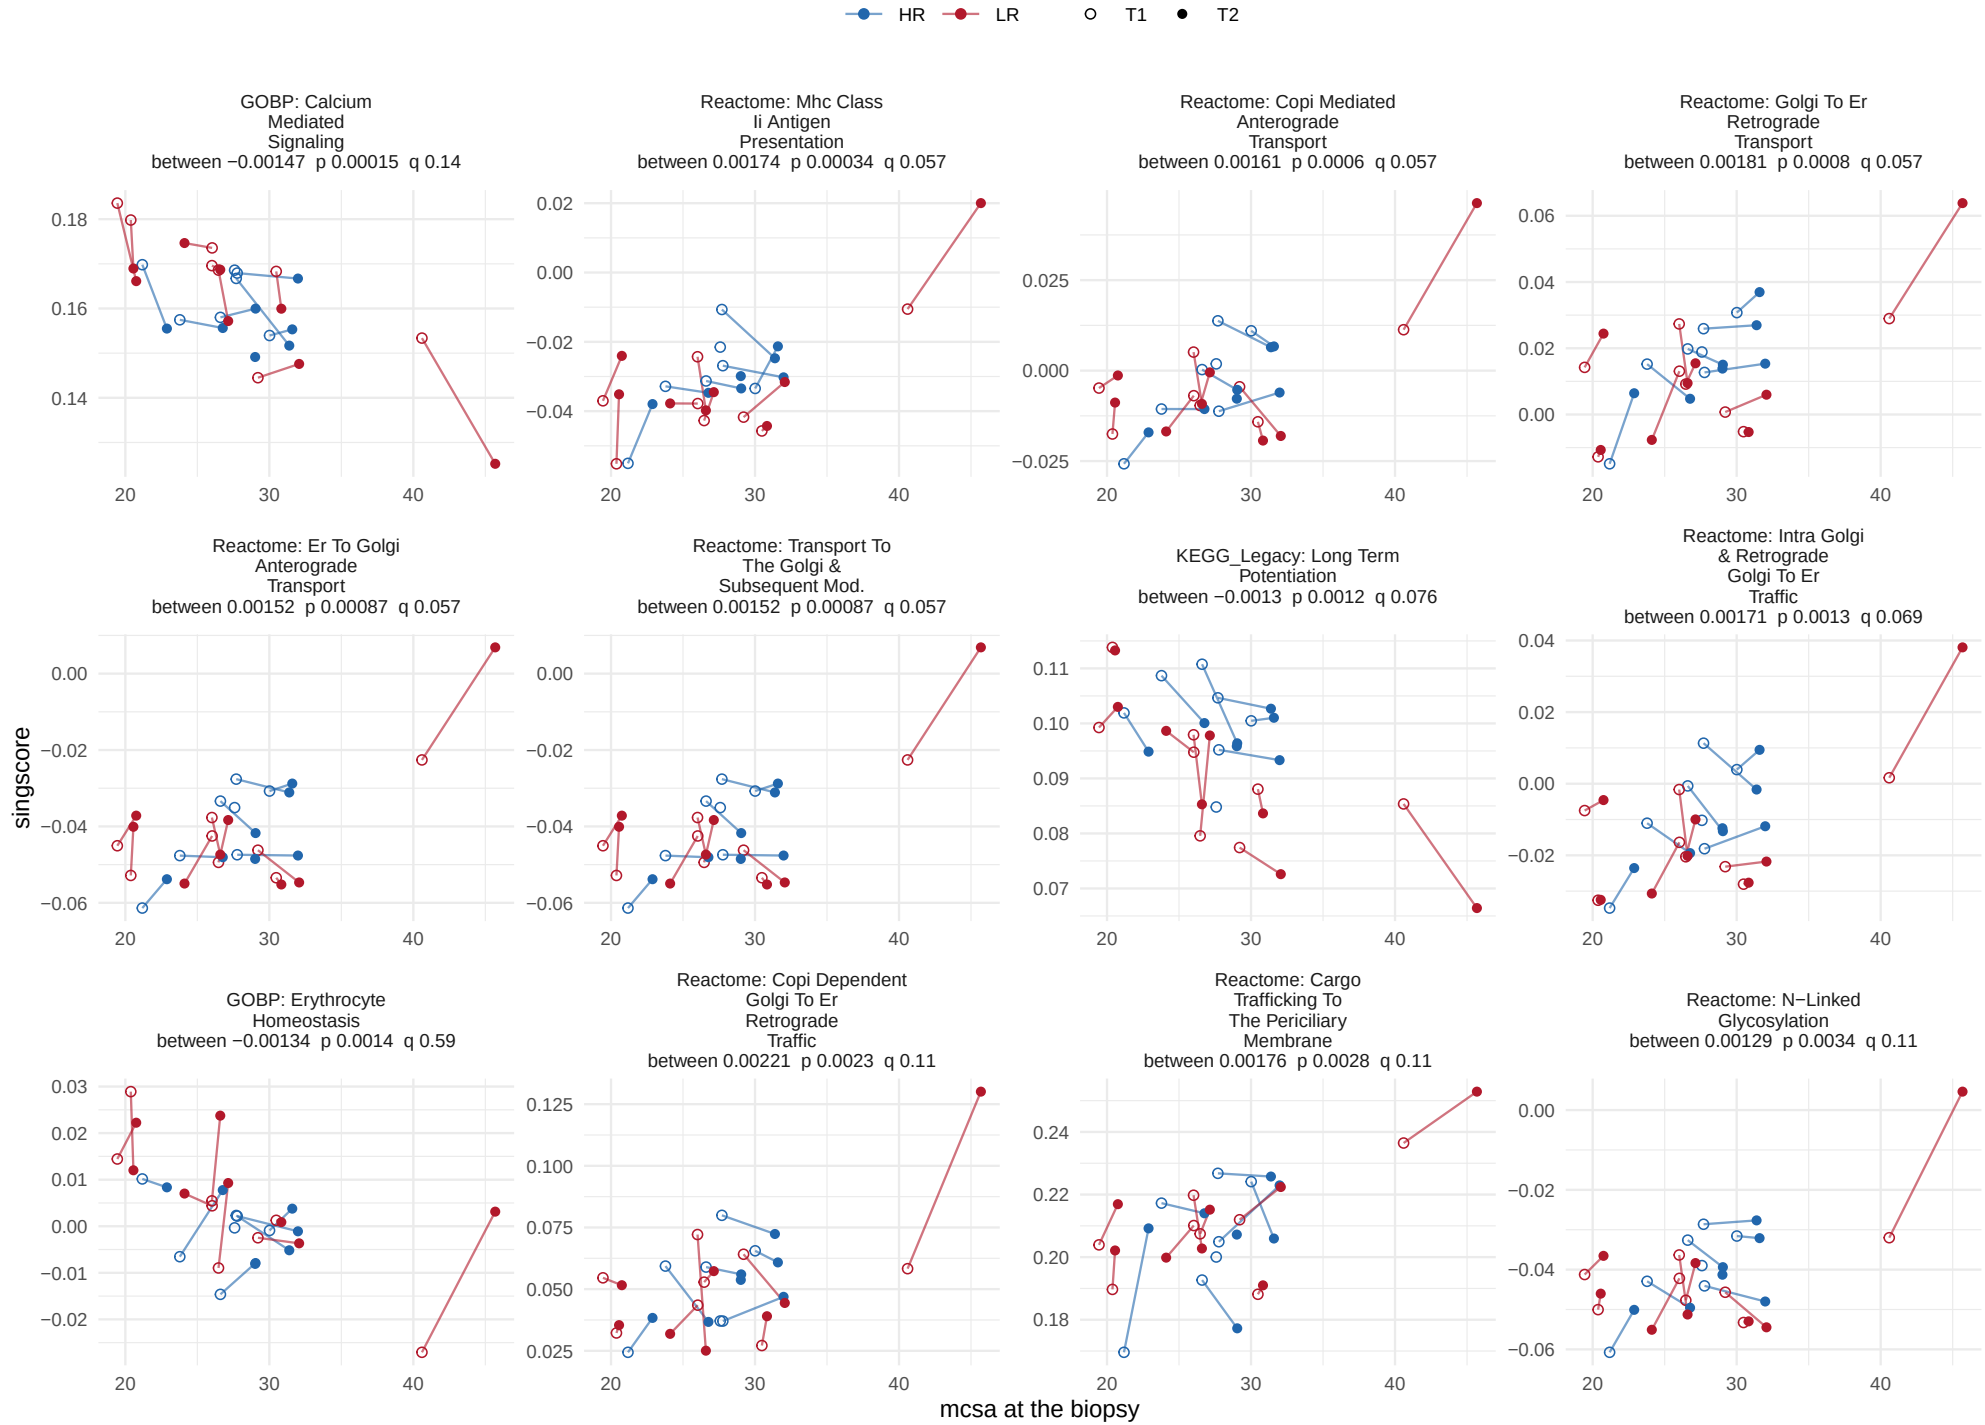

limma on 30 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

mcsa, between−person term


140 of 1378 sets at p < 0.05, 0 at BH < 0.05.

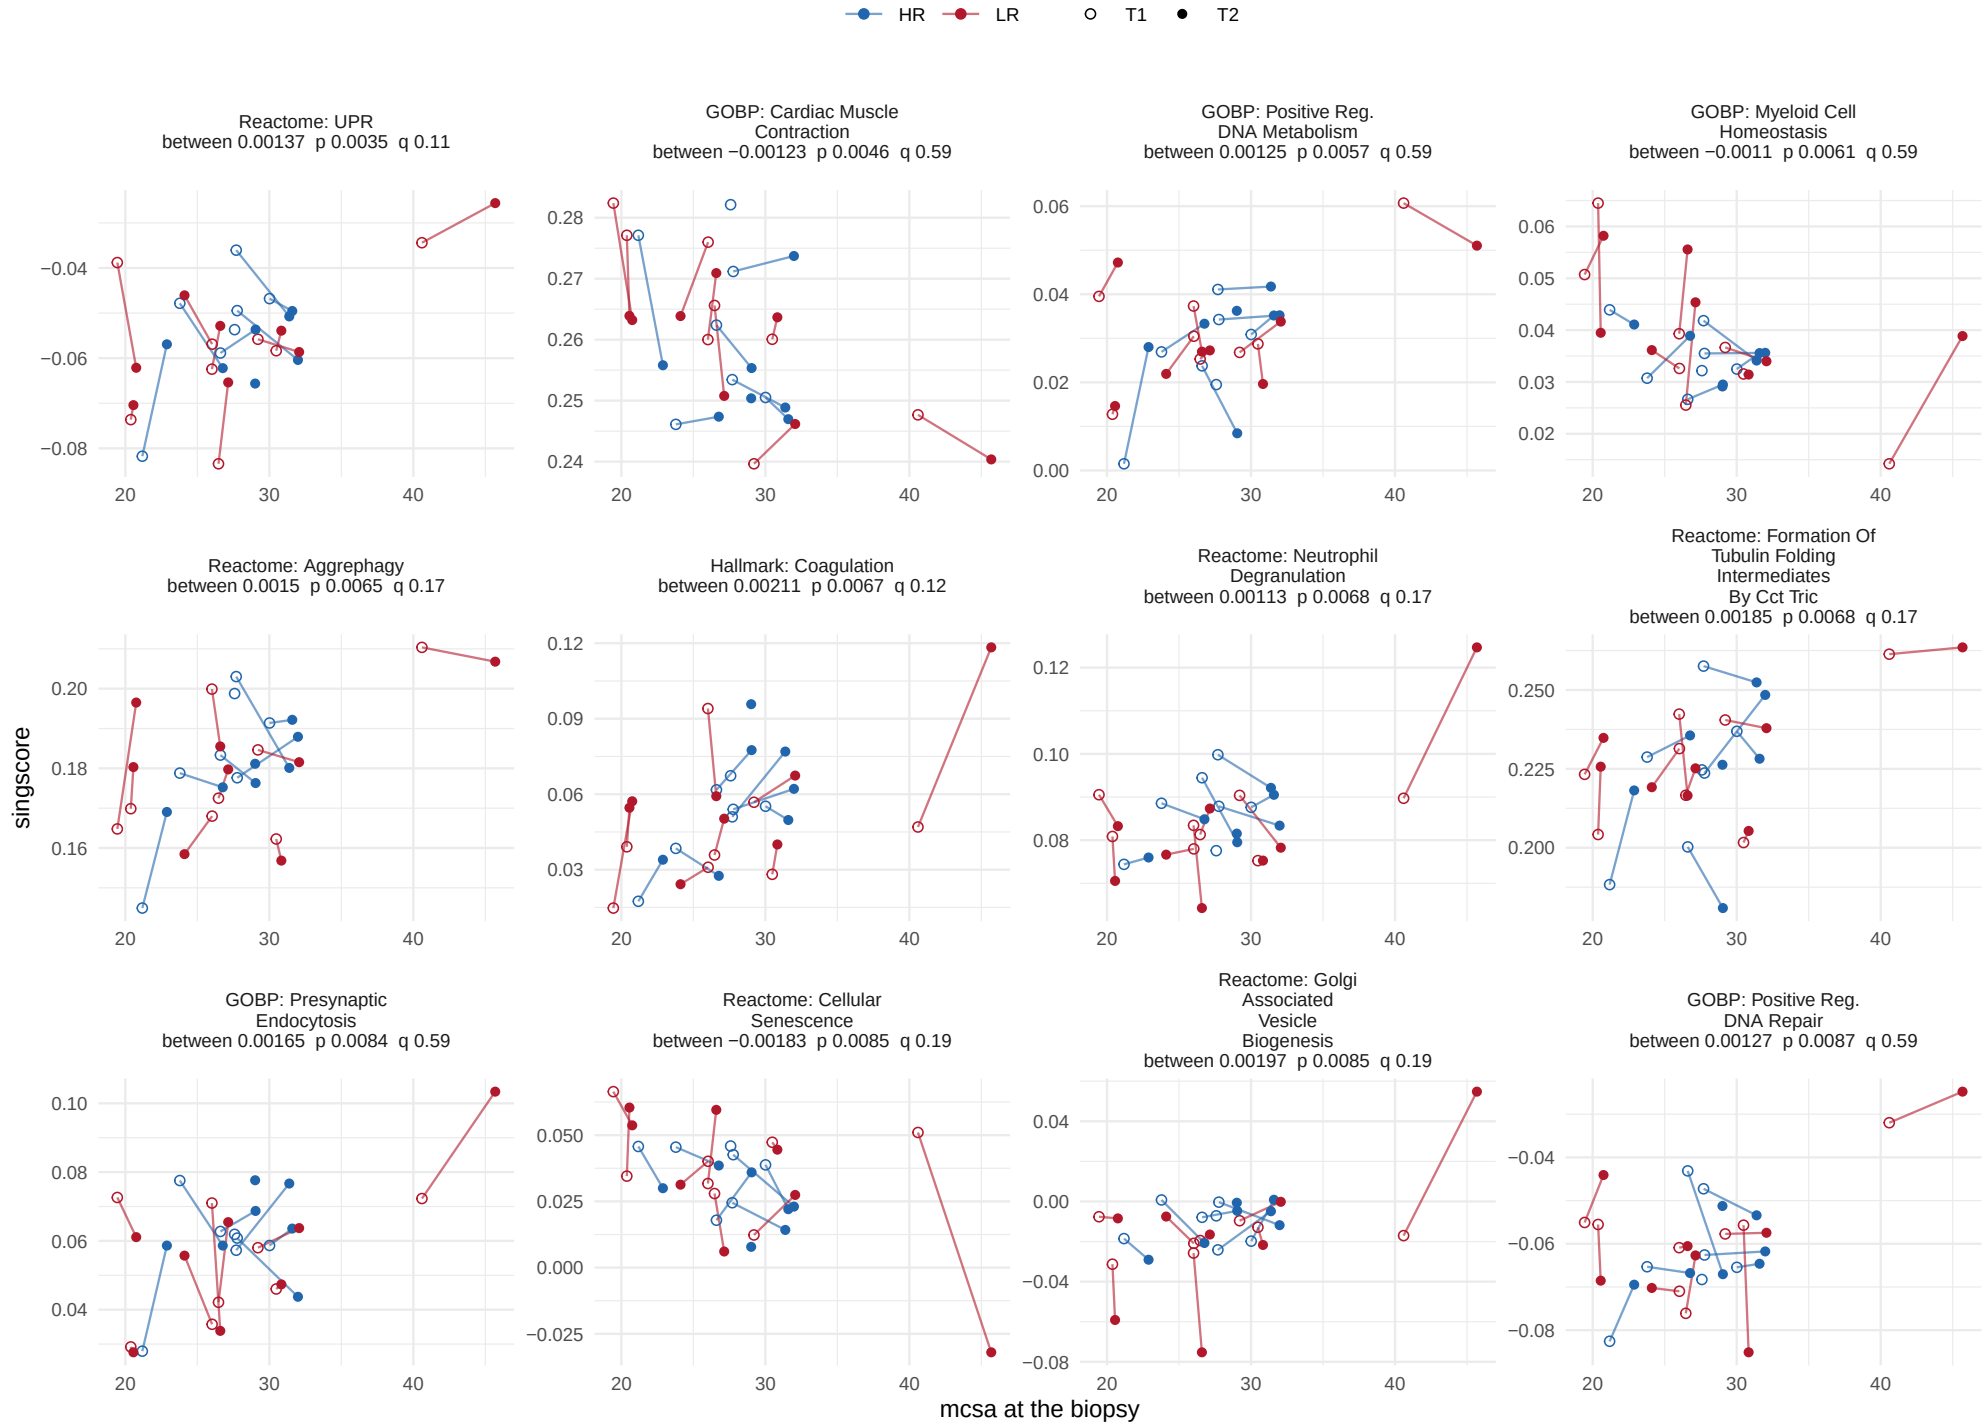

limma on 30 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

mcsa, between−person term


140 of 1378 sets at p < 0.05, 0 at BH < 0.05.

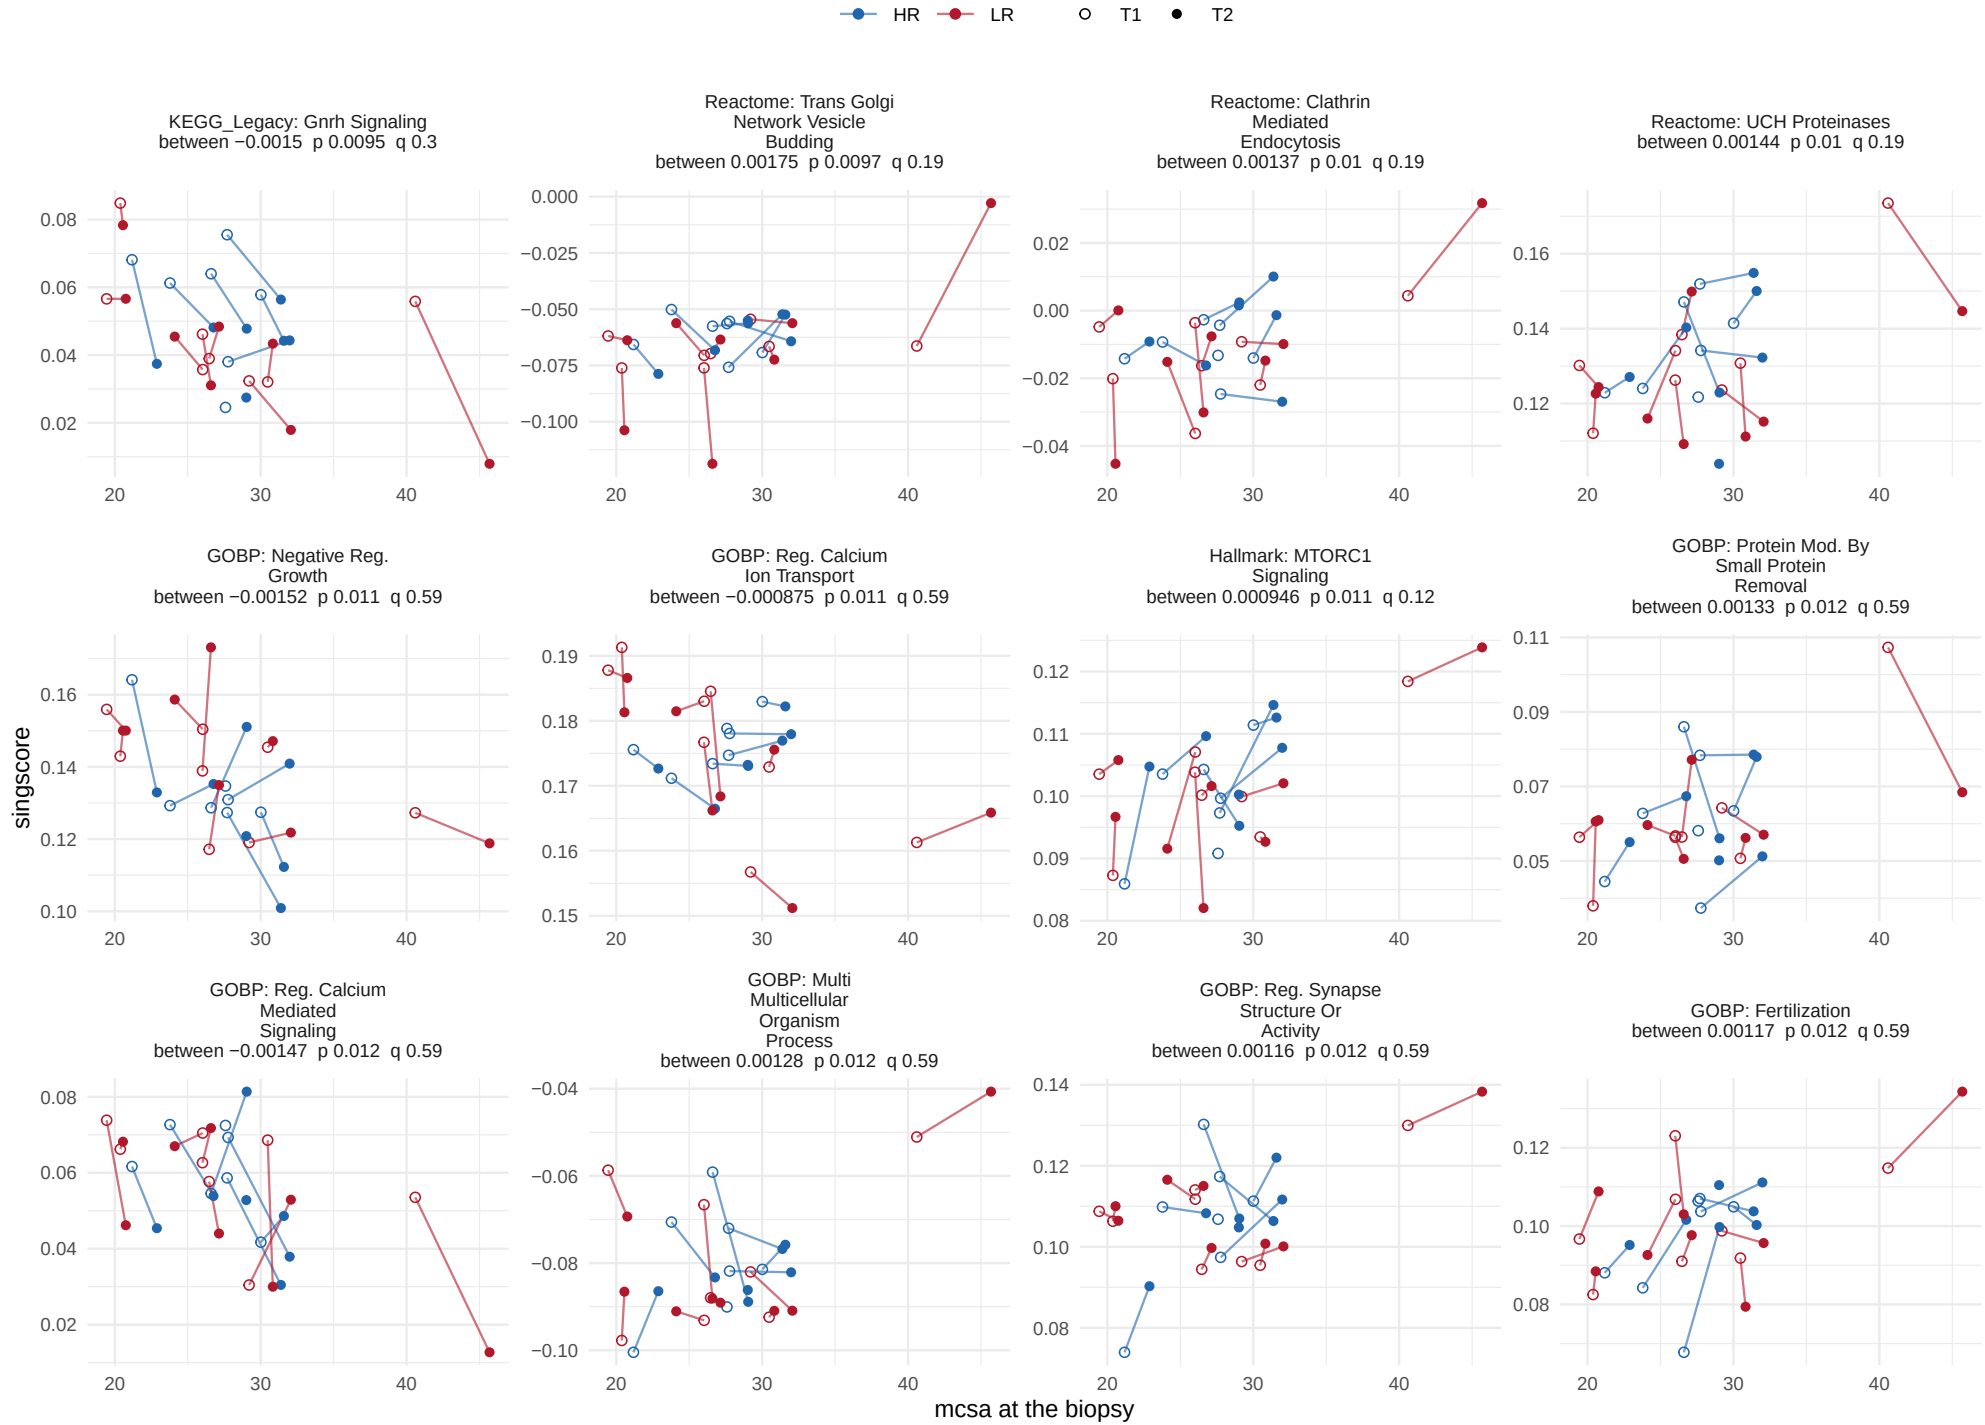

limma on 30 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

mcsa, between−person term


140 of 1378 sets at p < 0.05, 0 at BH < 0.05.

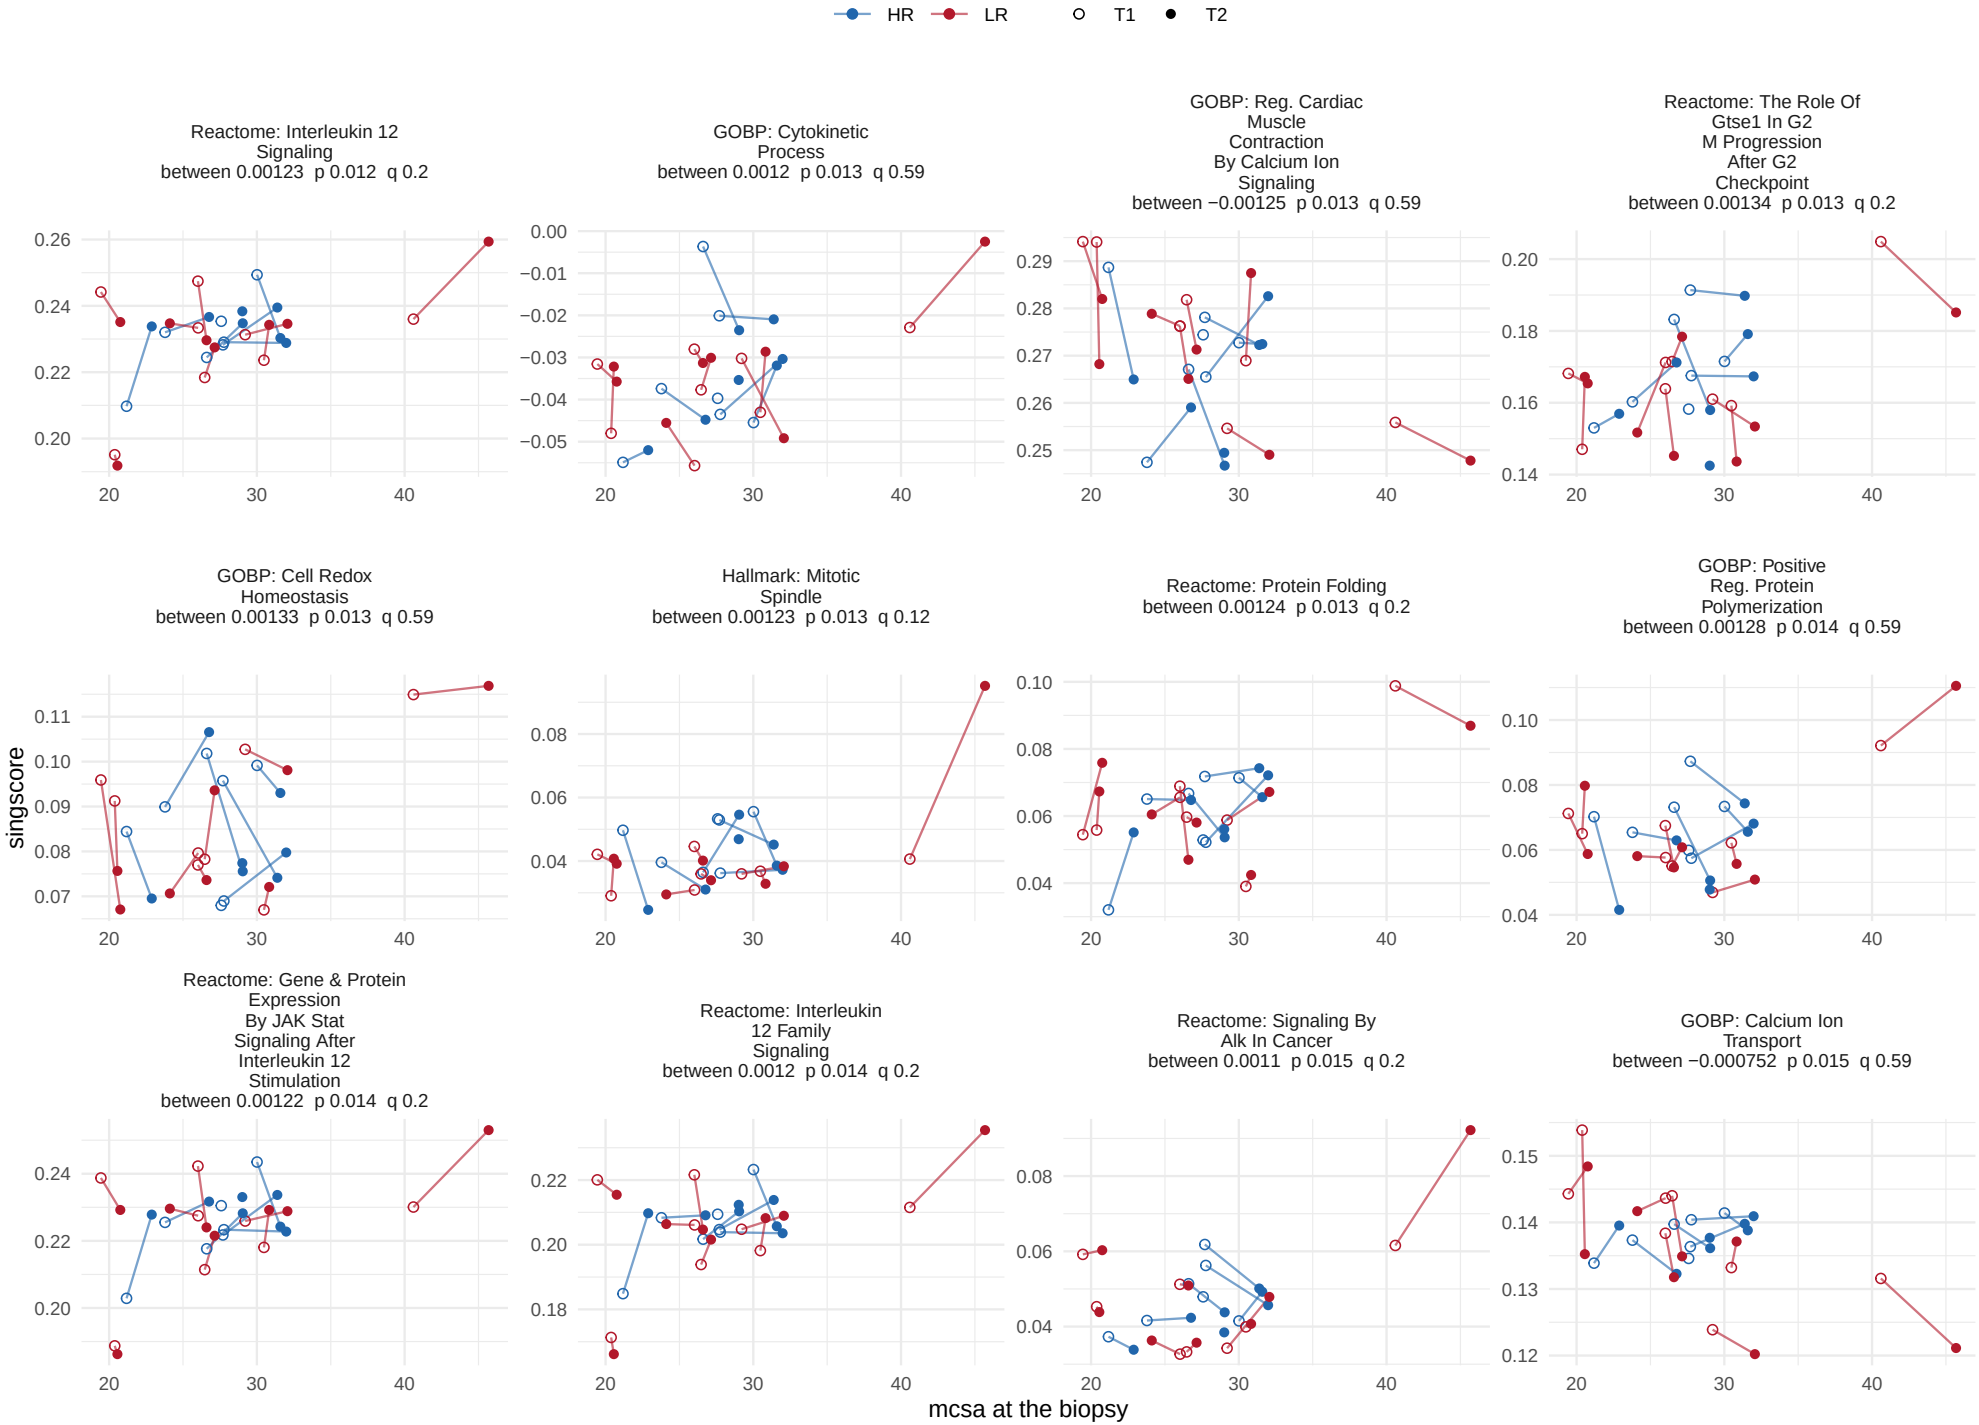

limma on 30 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

mcsa, between−person term


140 of 1378 sets at p < 0.05, 0 at BH < 0.05.

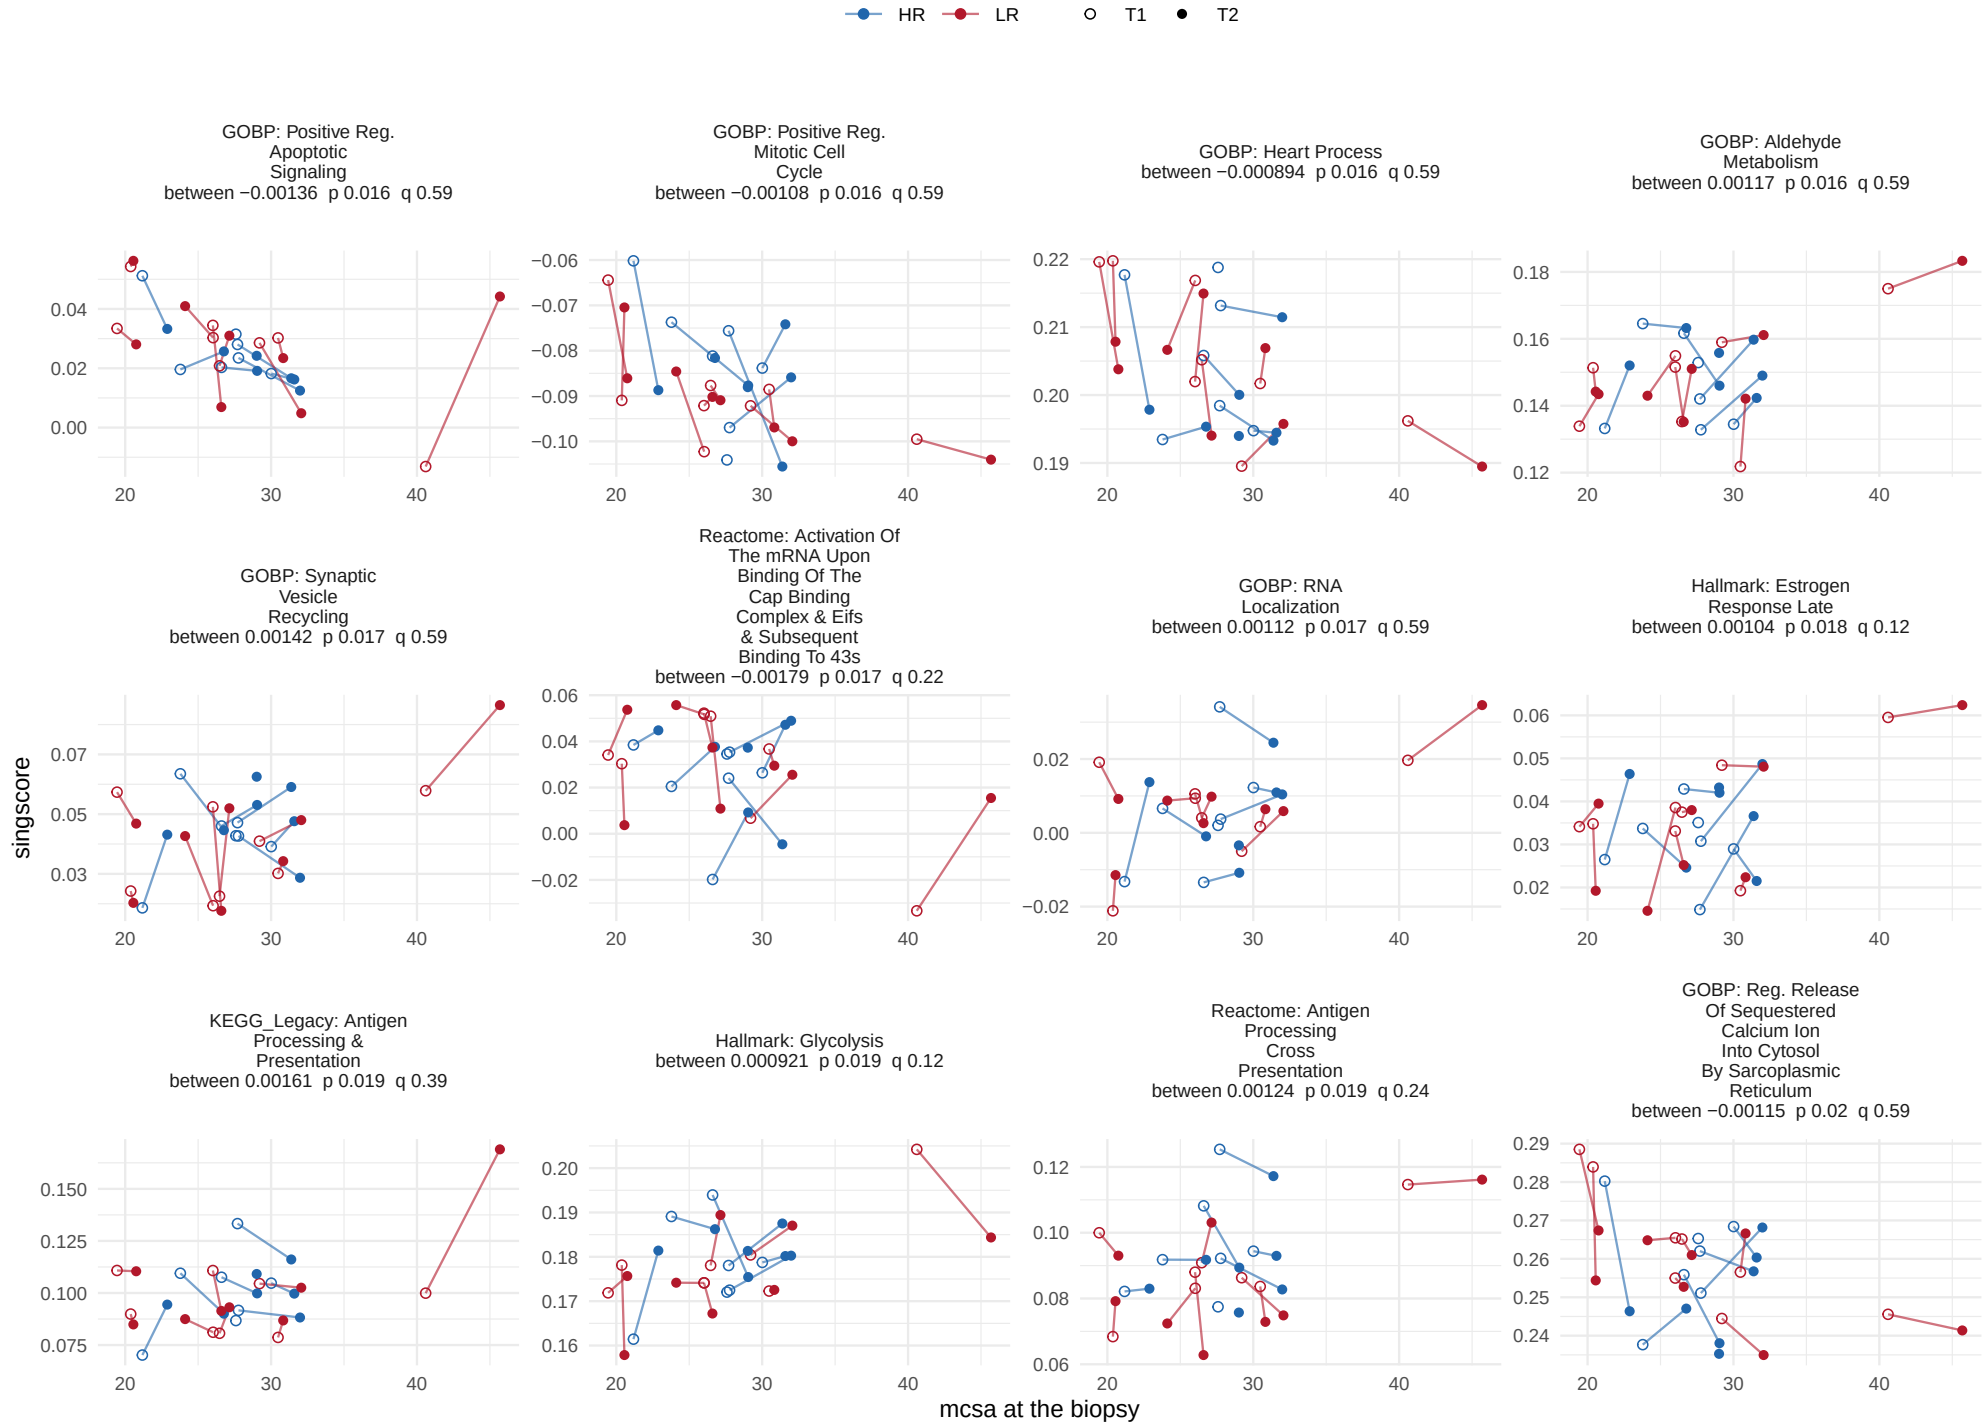

limma on 30 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

mcsa, between−person term


140 of 1378 sets at p < 0.05, 0 at BH < 0.05.

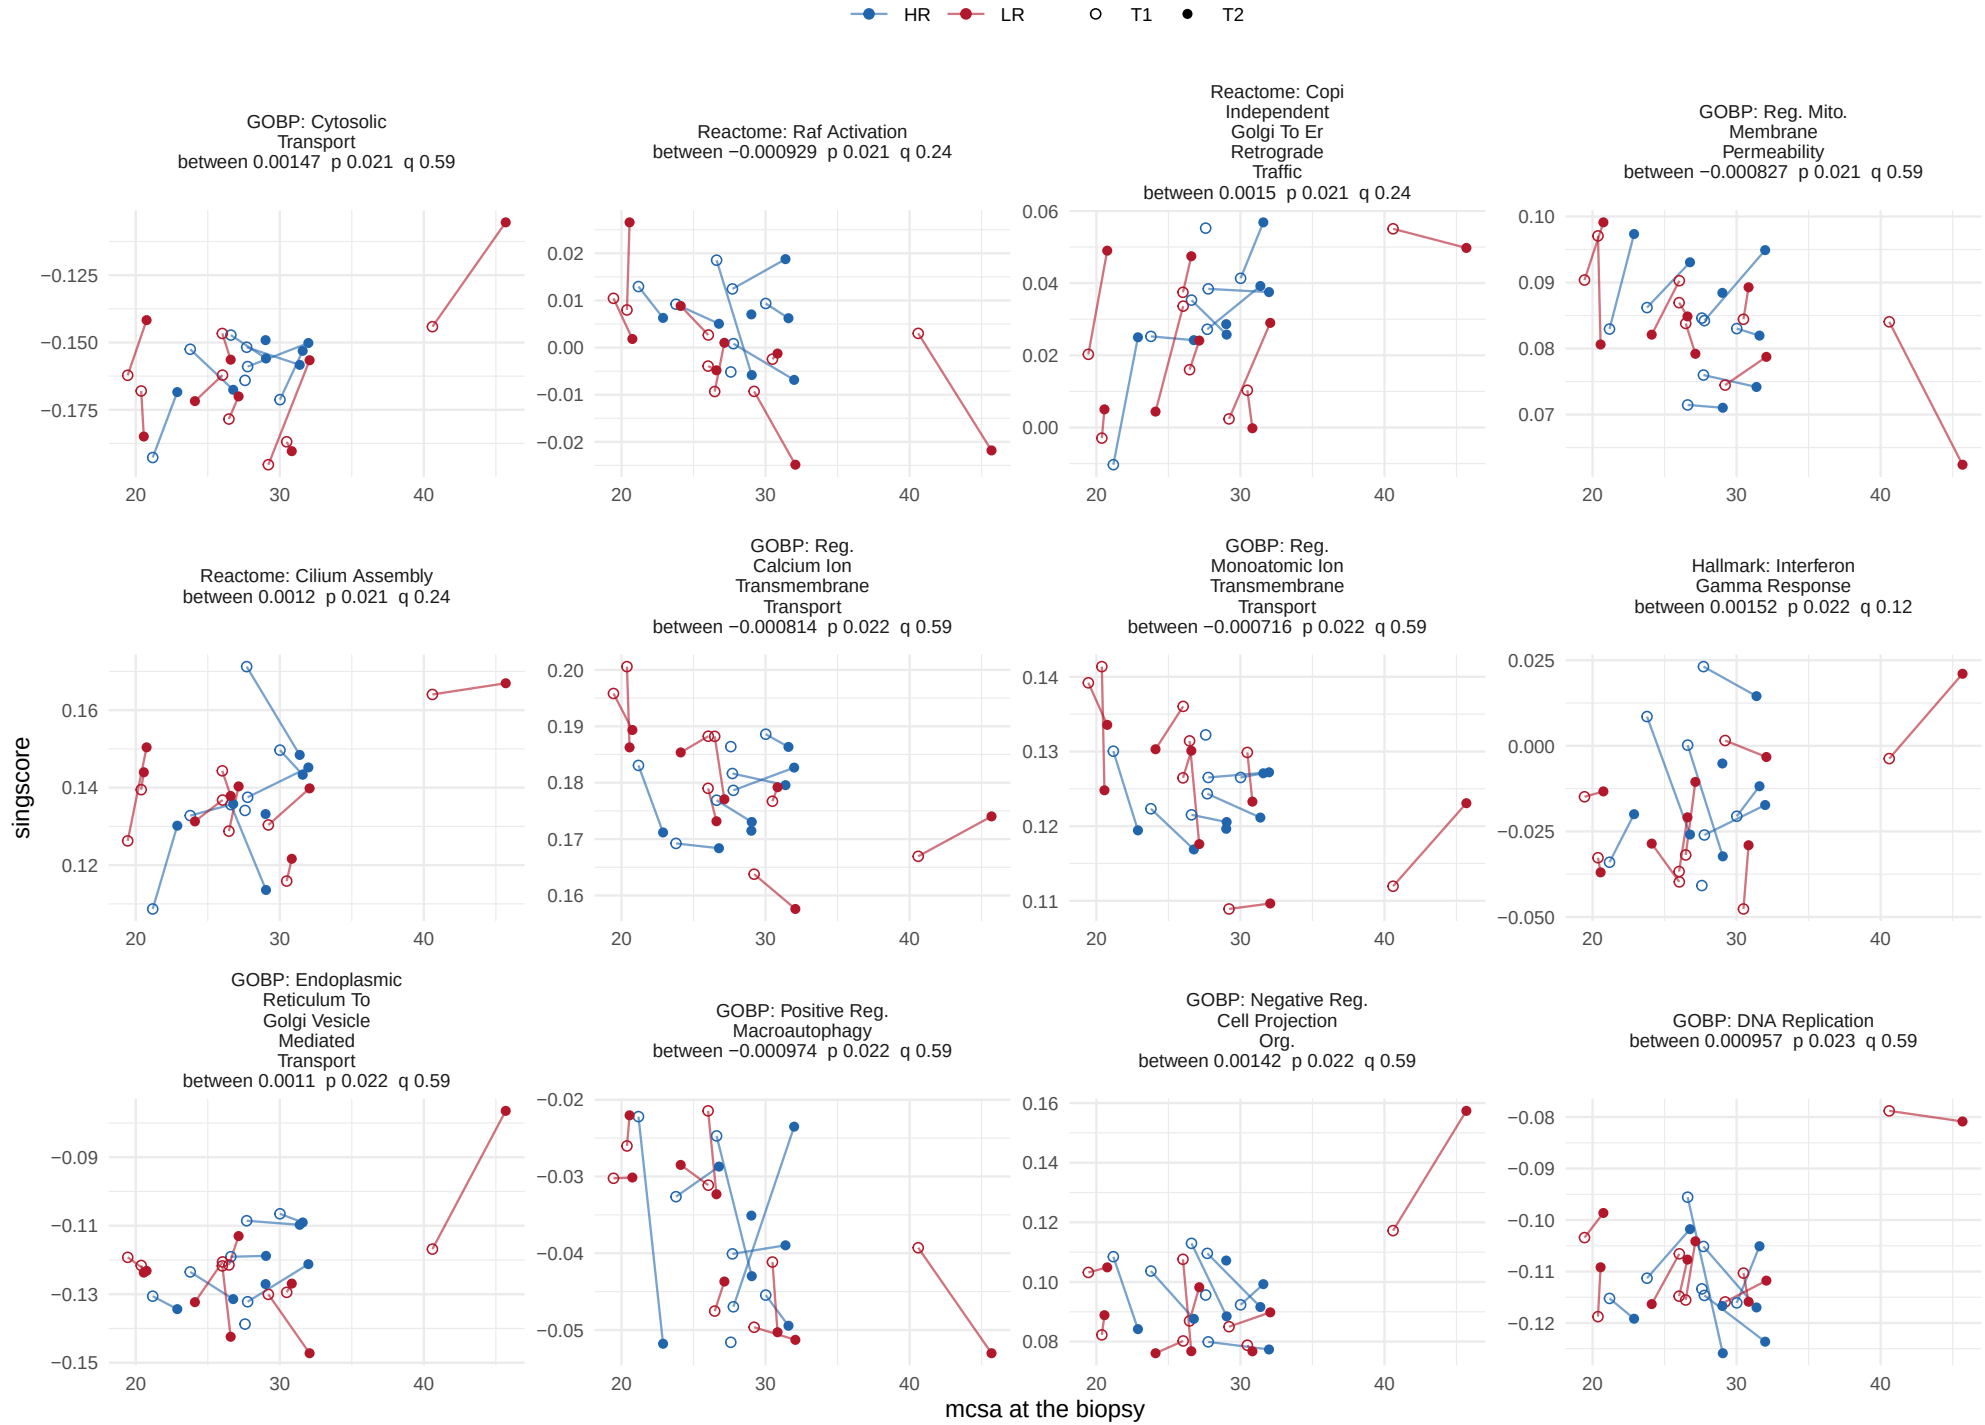

limma on 30 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

mcsa, between−person term


140 of 1378 sets at p < 0.05, 0 at BH < 0.05.

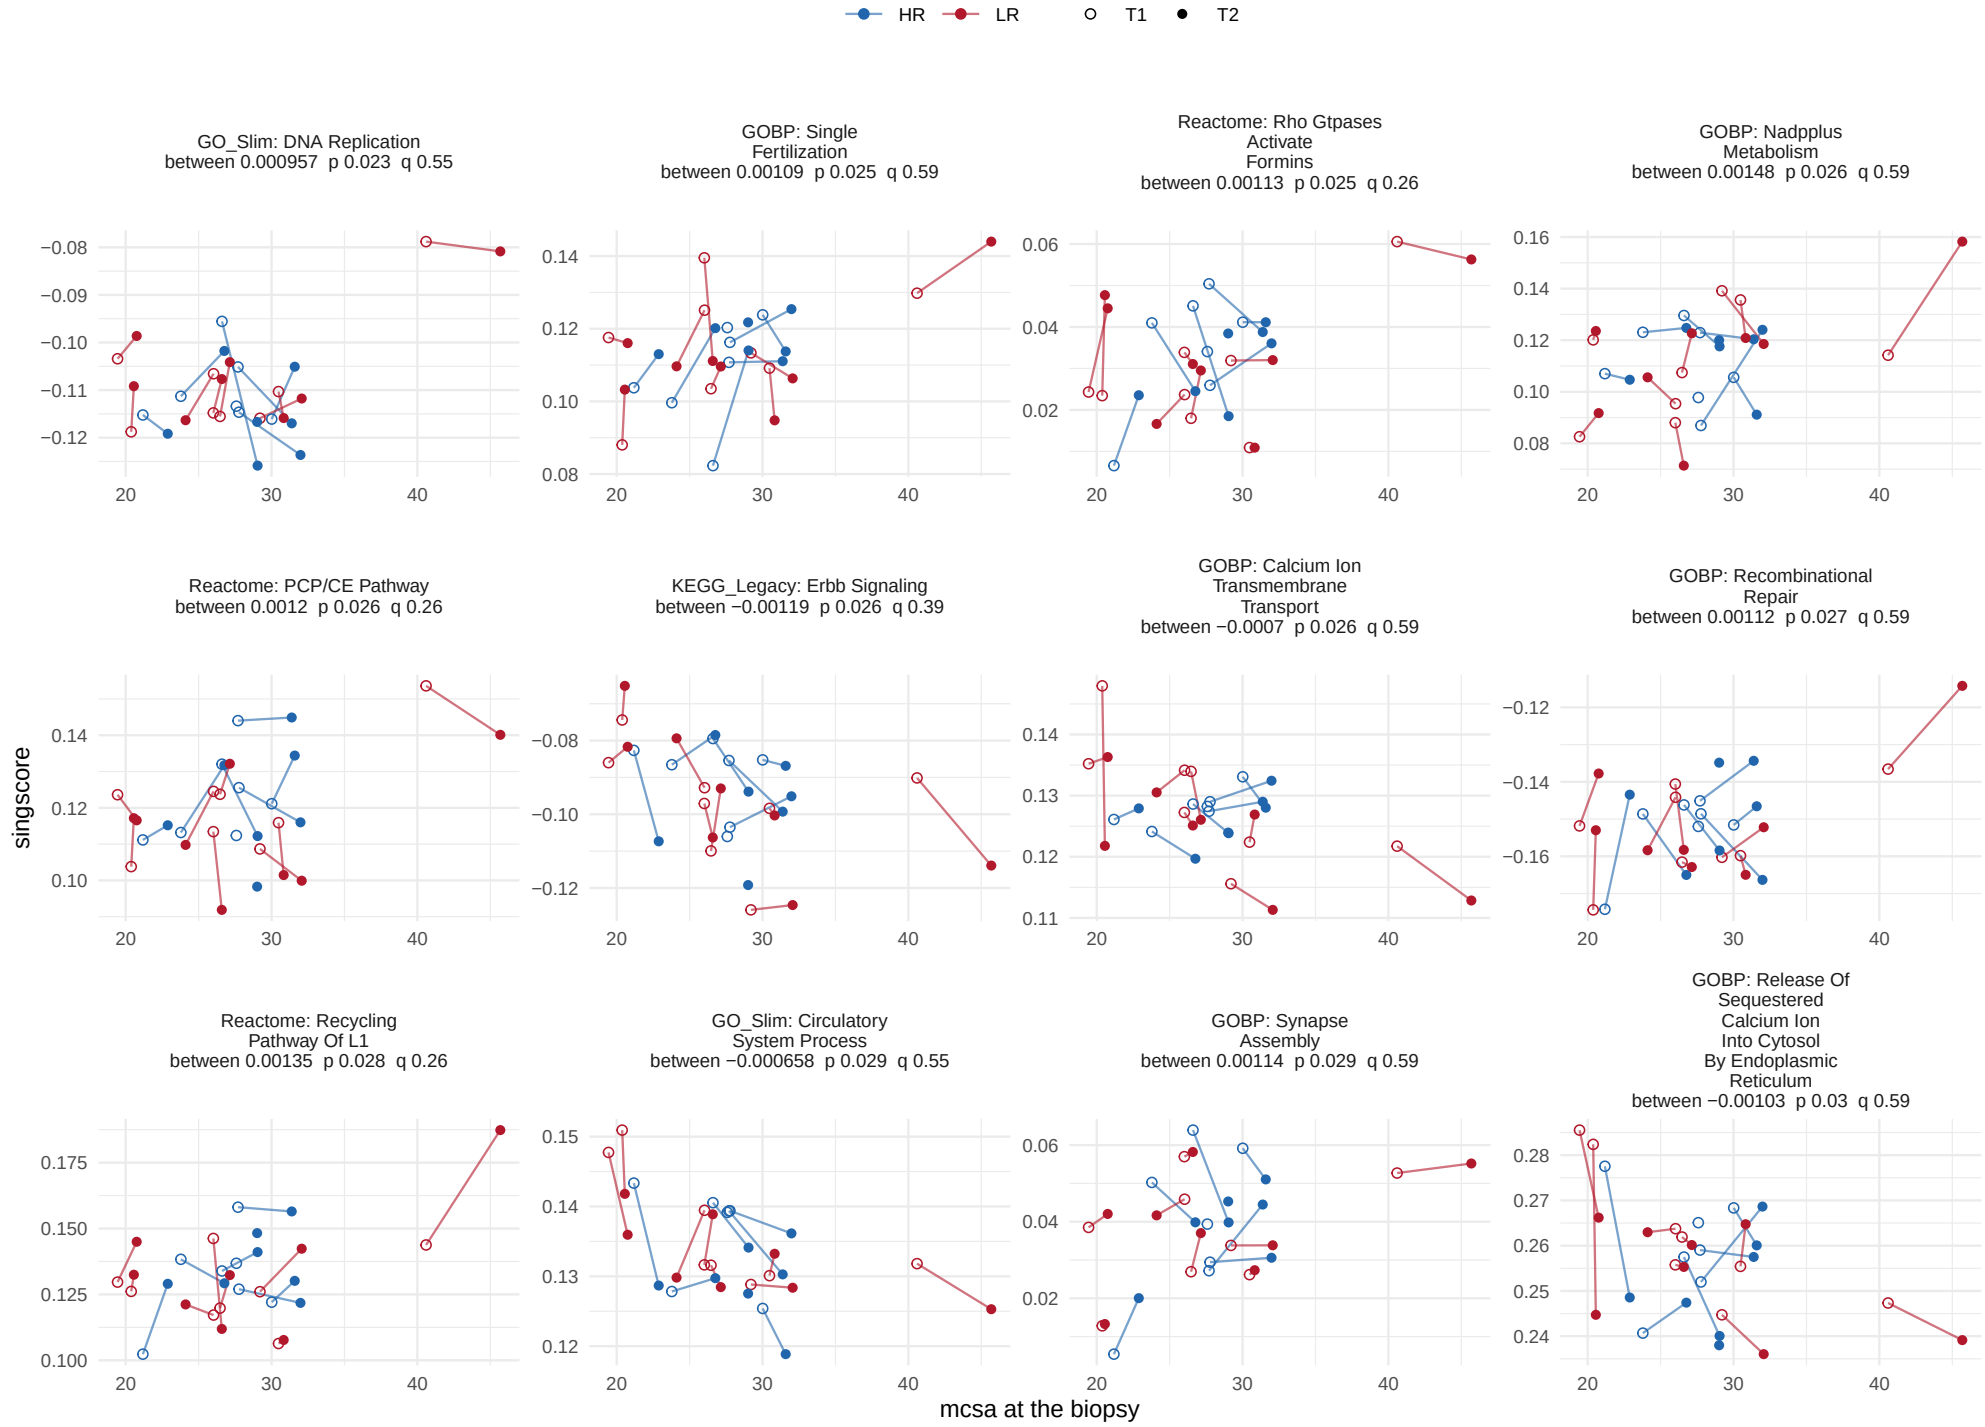

limma on 30 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

mcsa, between−person term


140 of 1378 sets at p < 0.05, 0 at BH < 0.05.

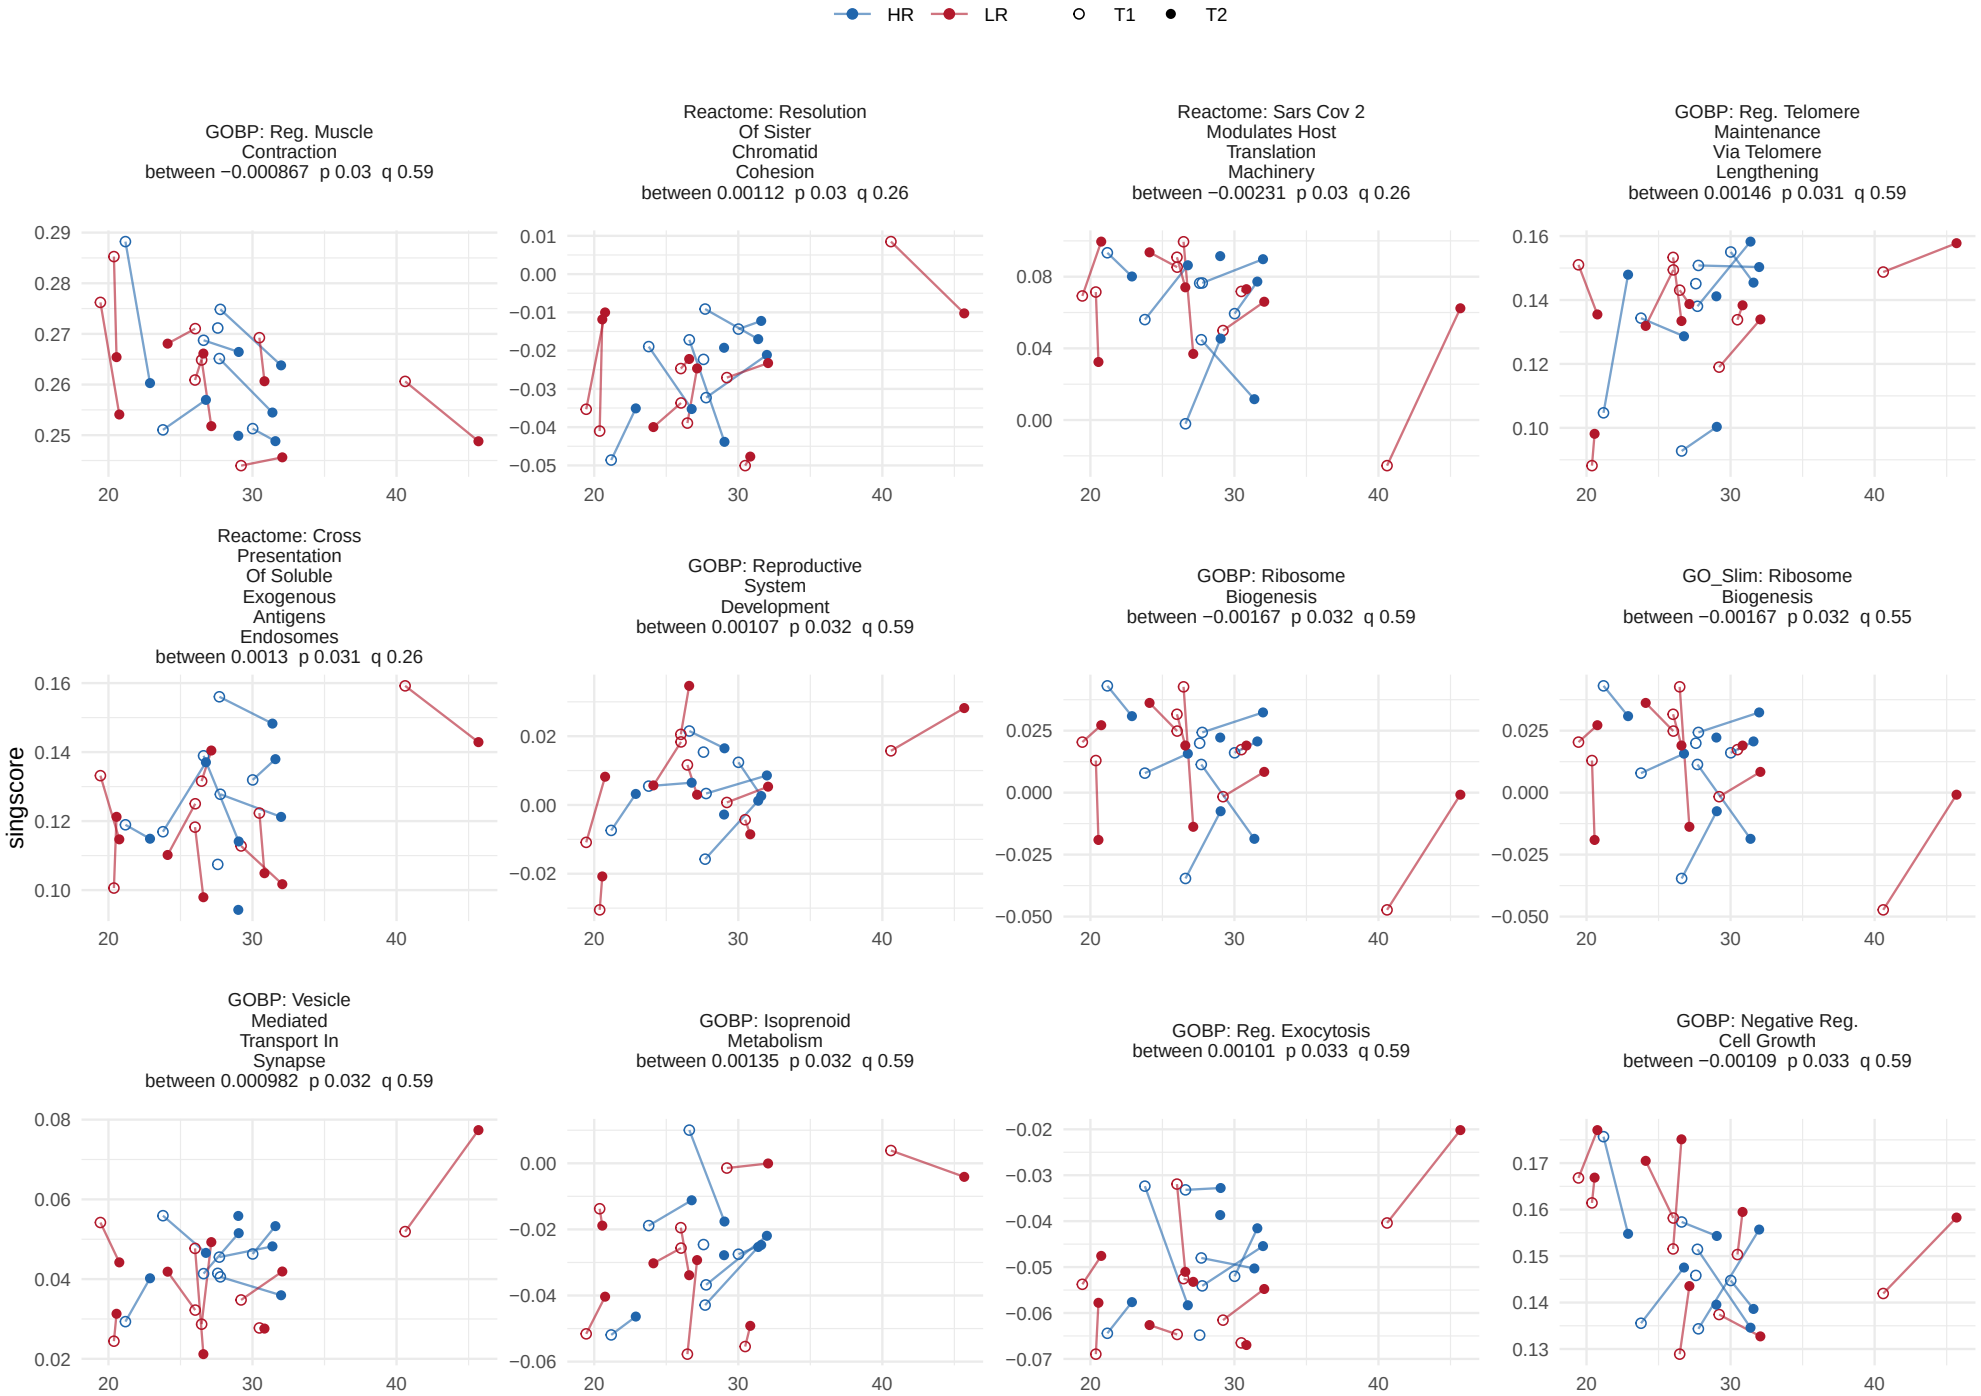

limma on 30 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

mcsa, between−person term


140 of 1378 sets at p < 0.05, 0 at BH < 0.05.

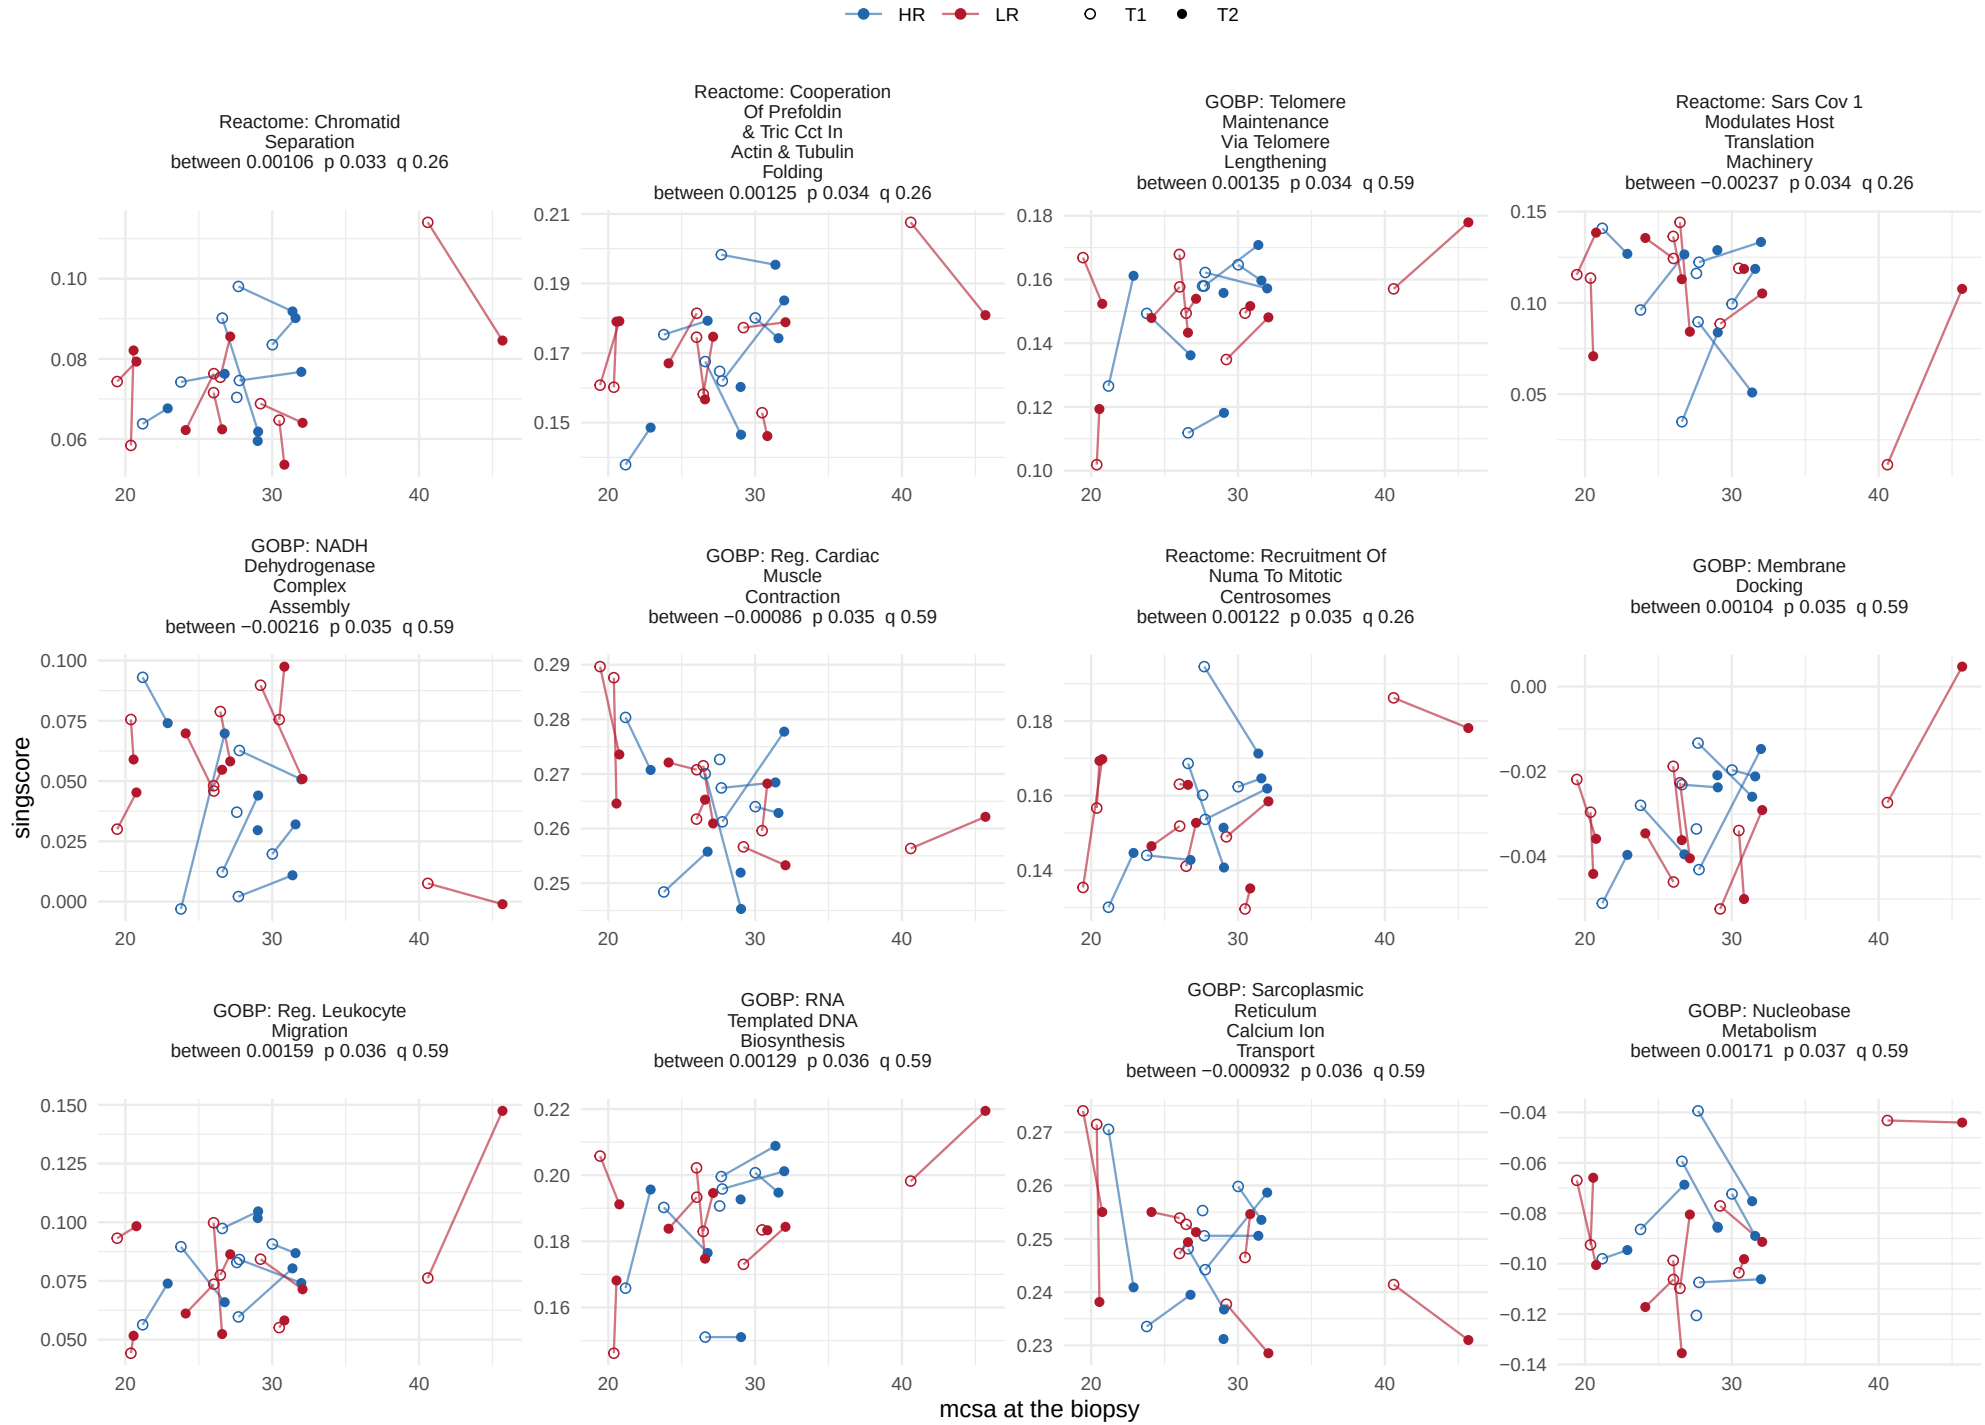

limma on 30 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

mcsa, between−person term


140 of 1378 sets at p < 0.05, 0 at BH < 0.05.

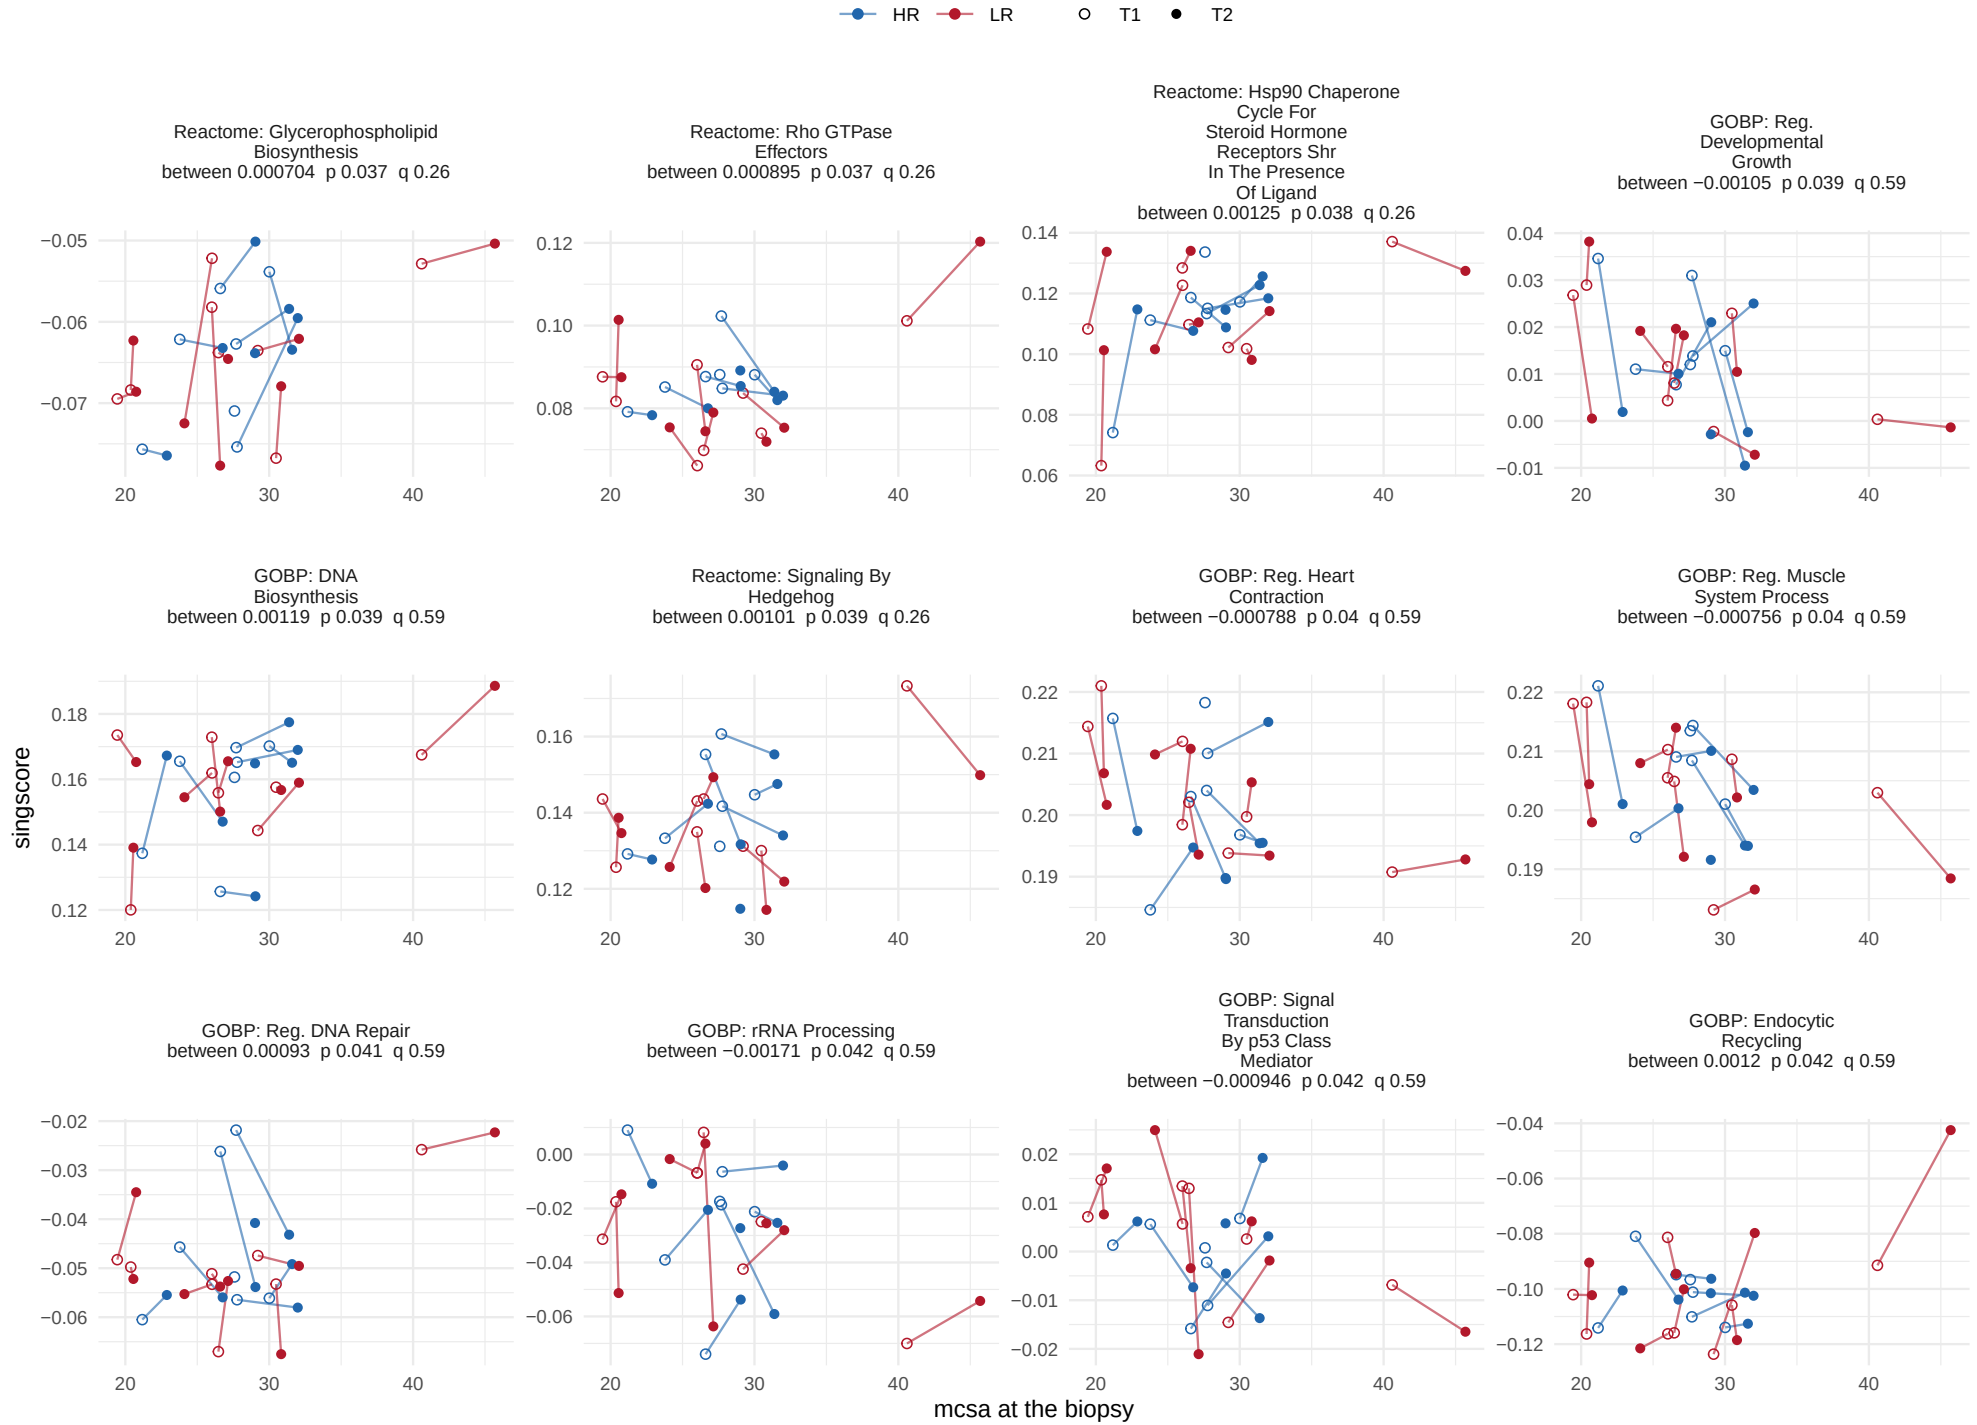

limma on 30 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

mcsa, between−person term


140 of 1378 sets at p < 0.05, 0 at BH < 0.05.

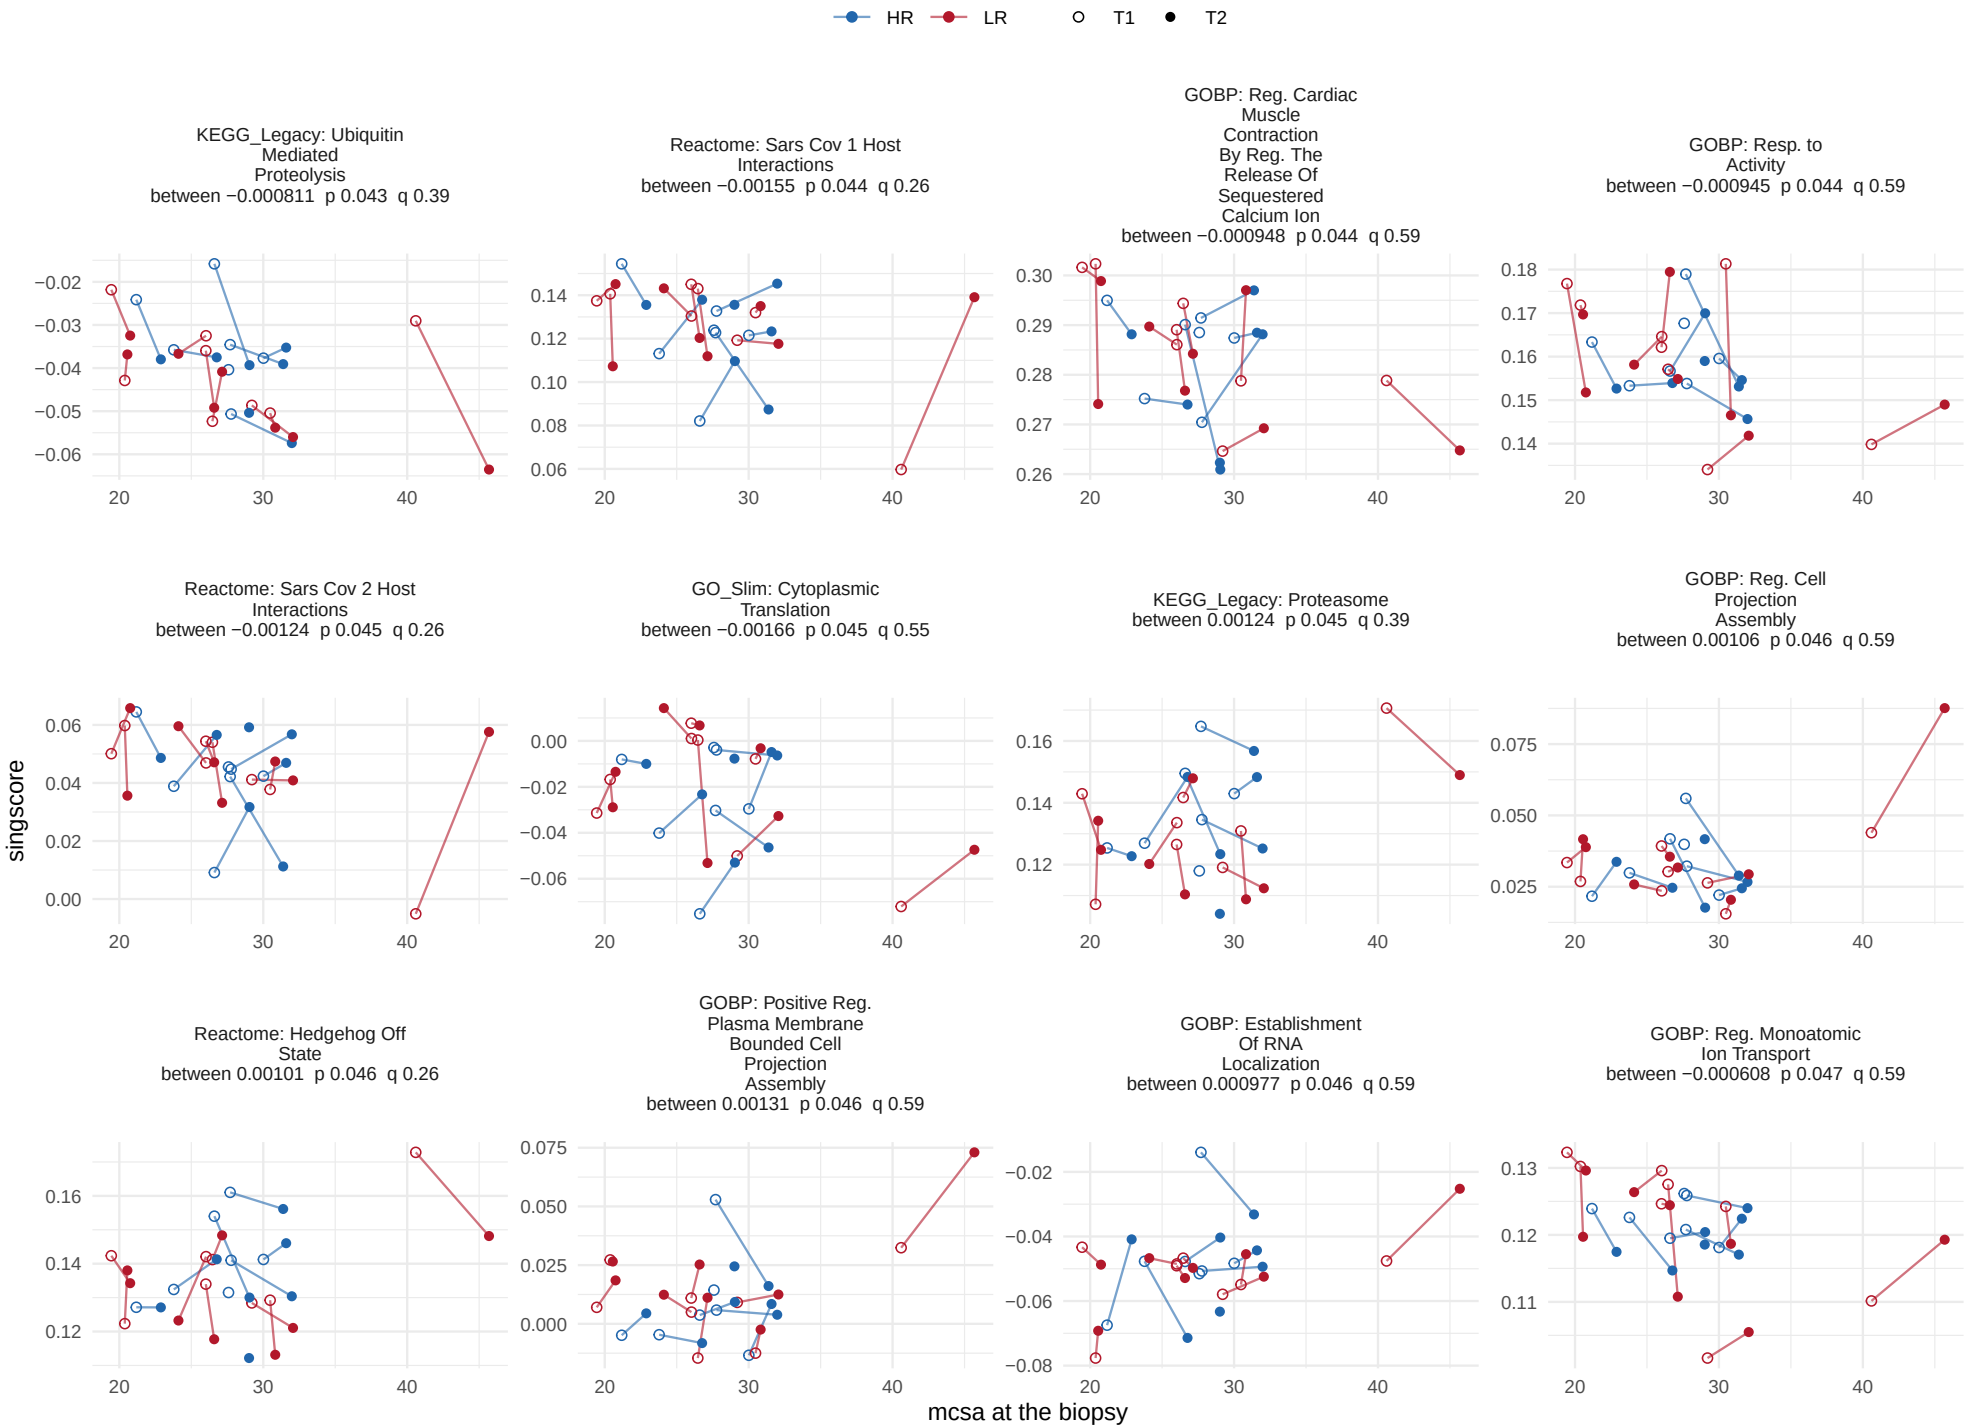

limma on 30 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

mcsa, between−person term


140 of 1378 sets at p < 0.05, 0 at BH < 0.05.

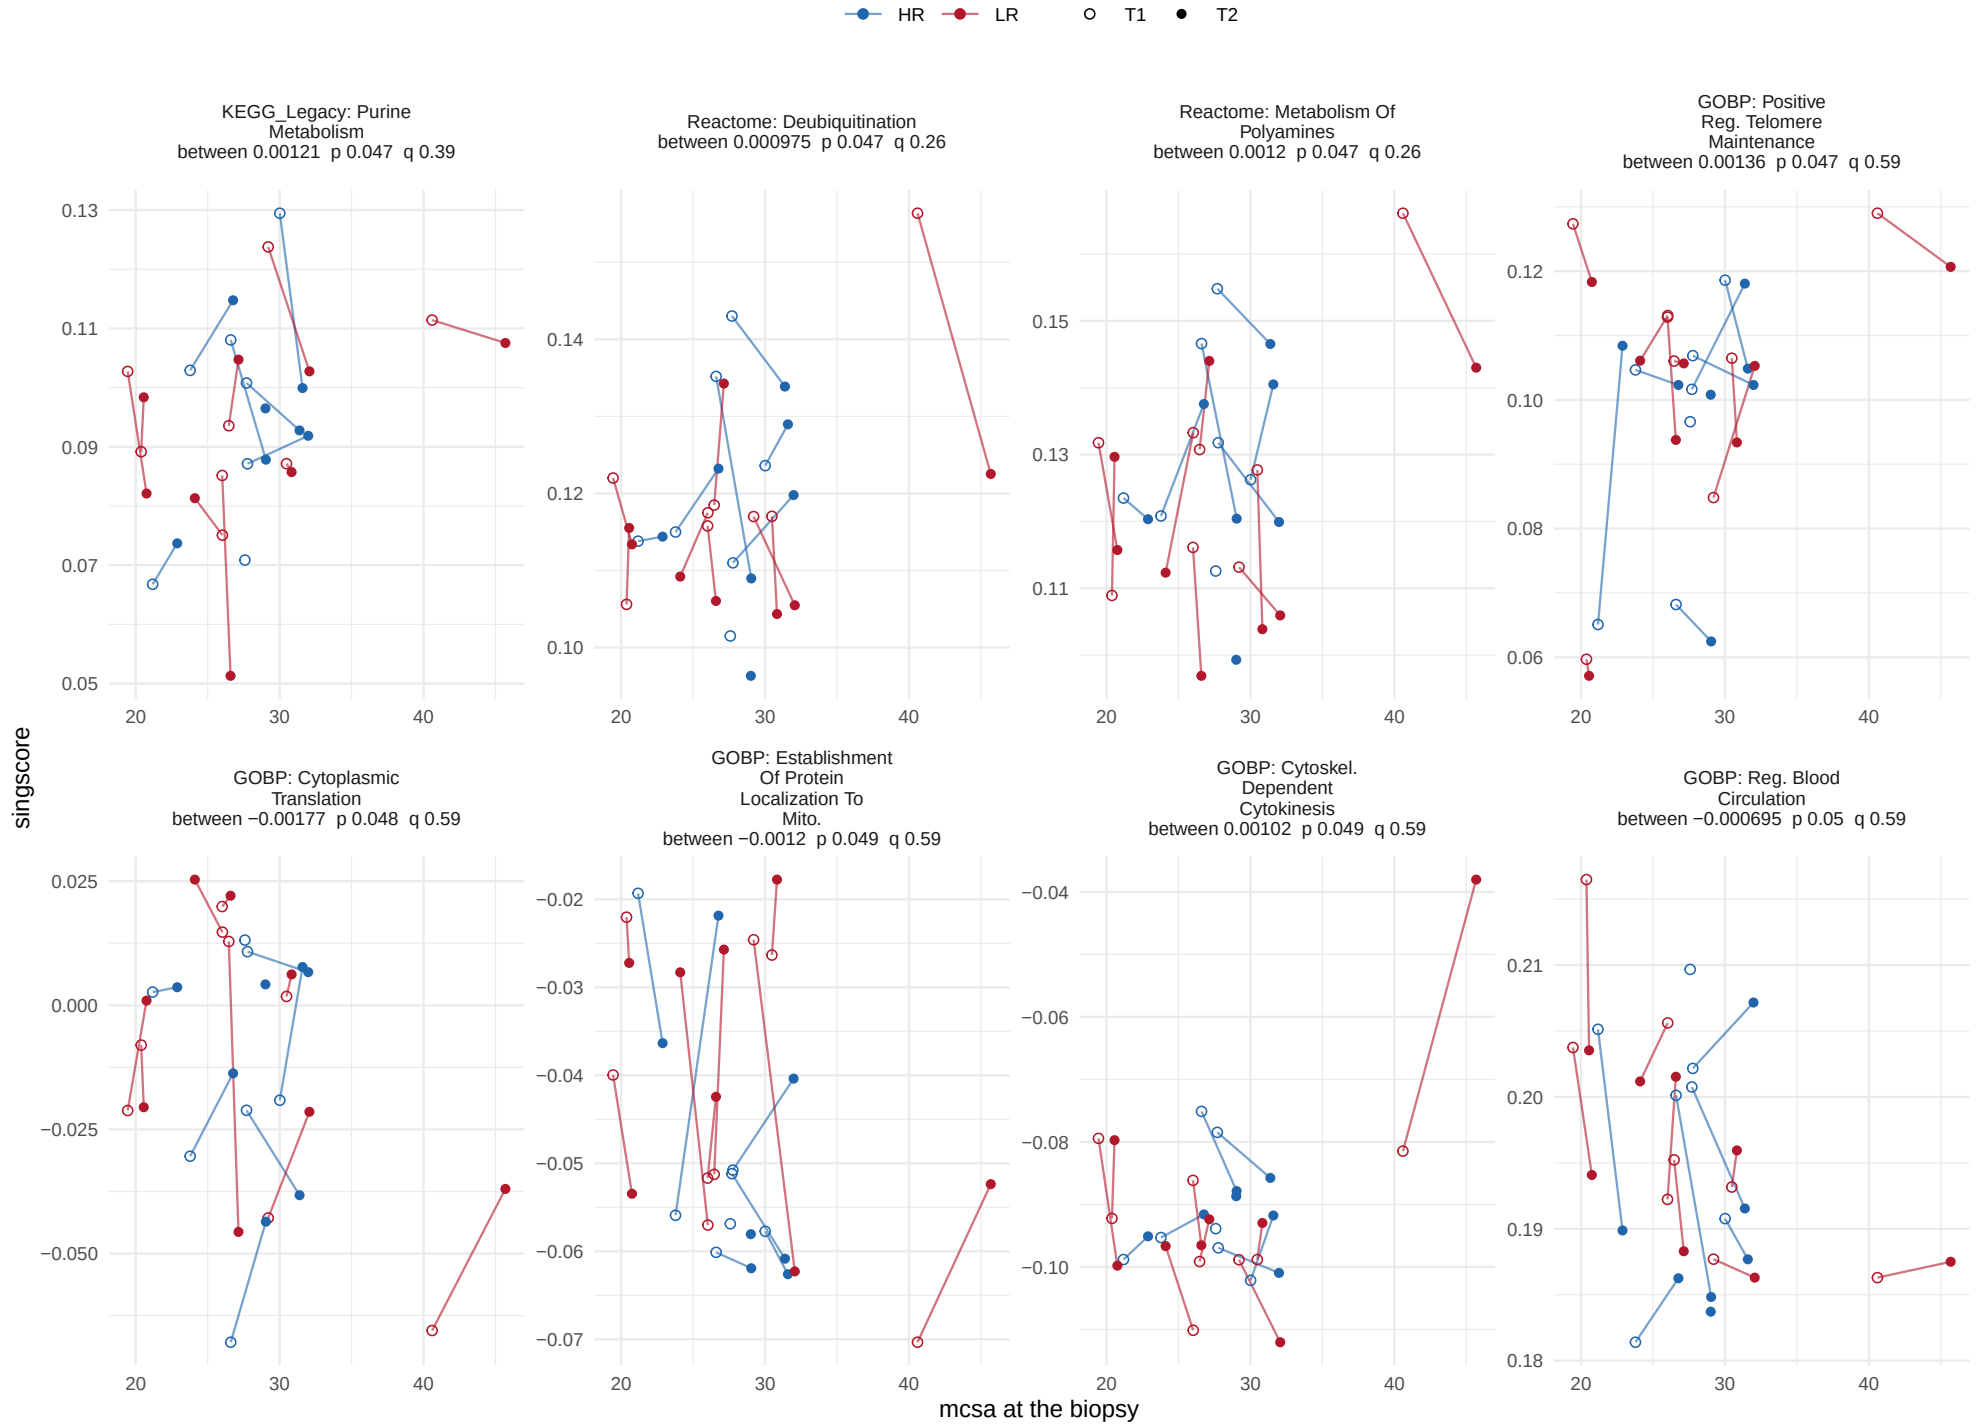

limma on 30 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

mcsa, within−person term


62 of 1378 sets at p < 0.05, 0 at BH < 0.05.

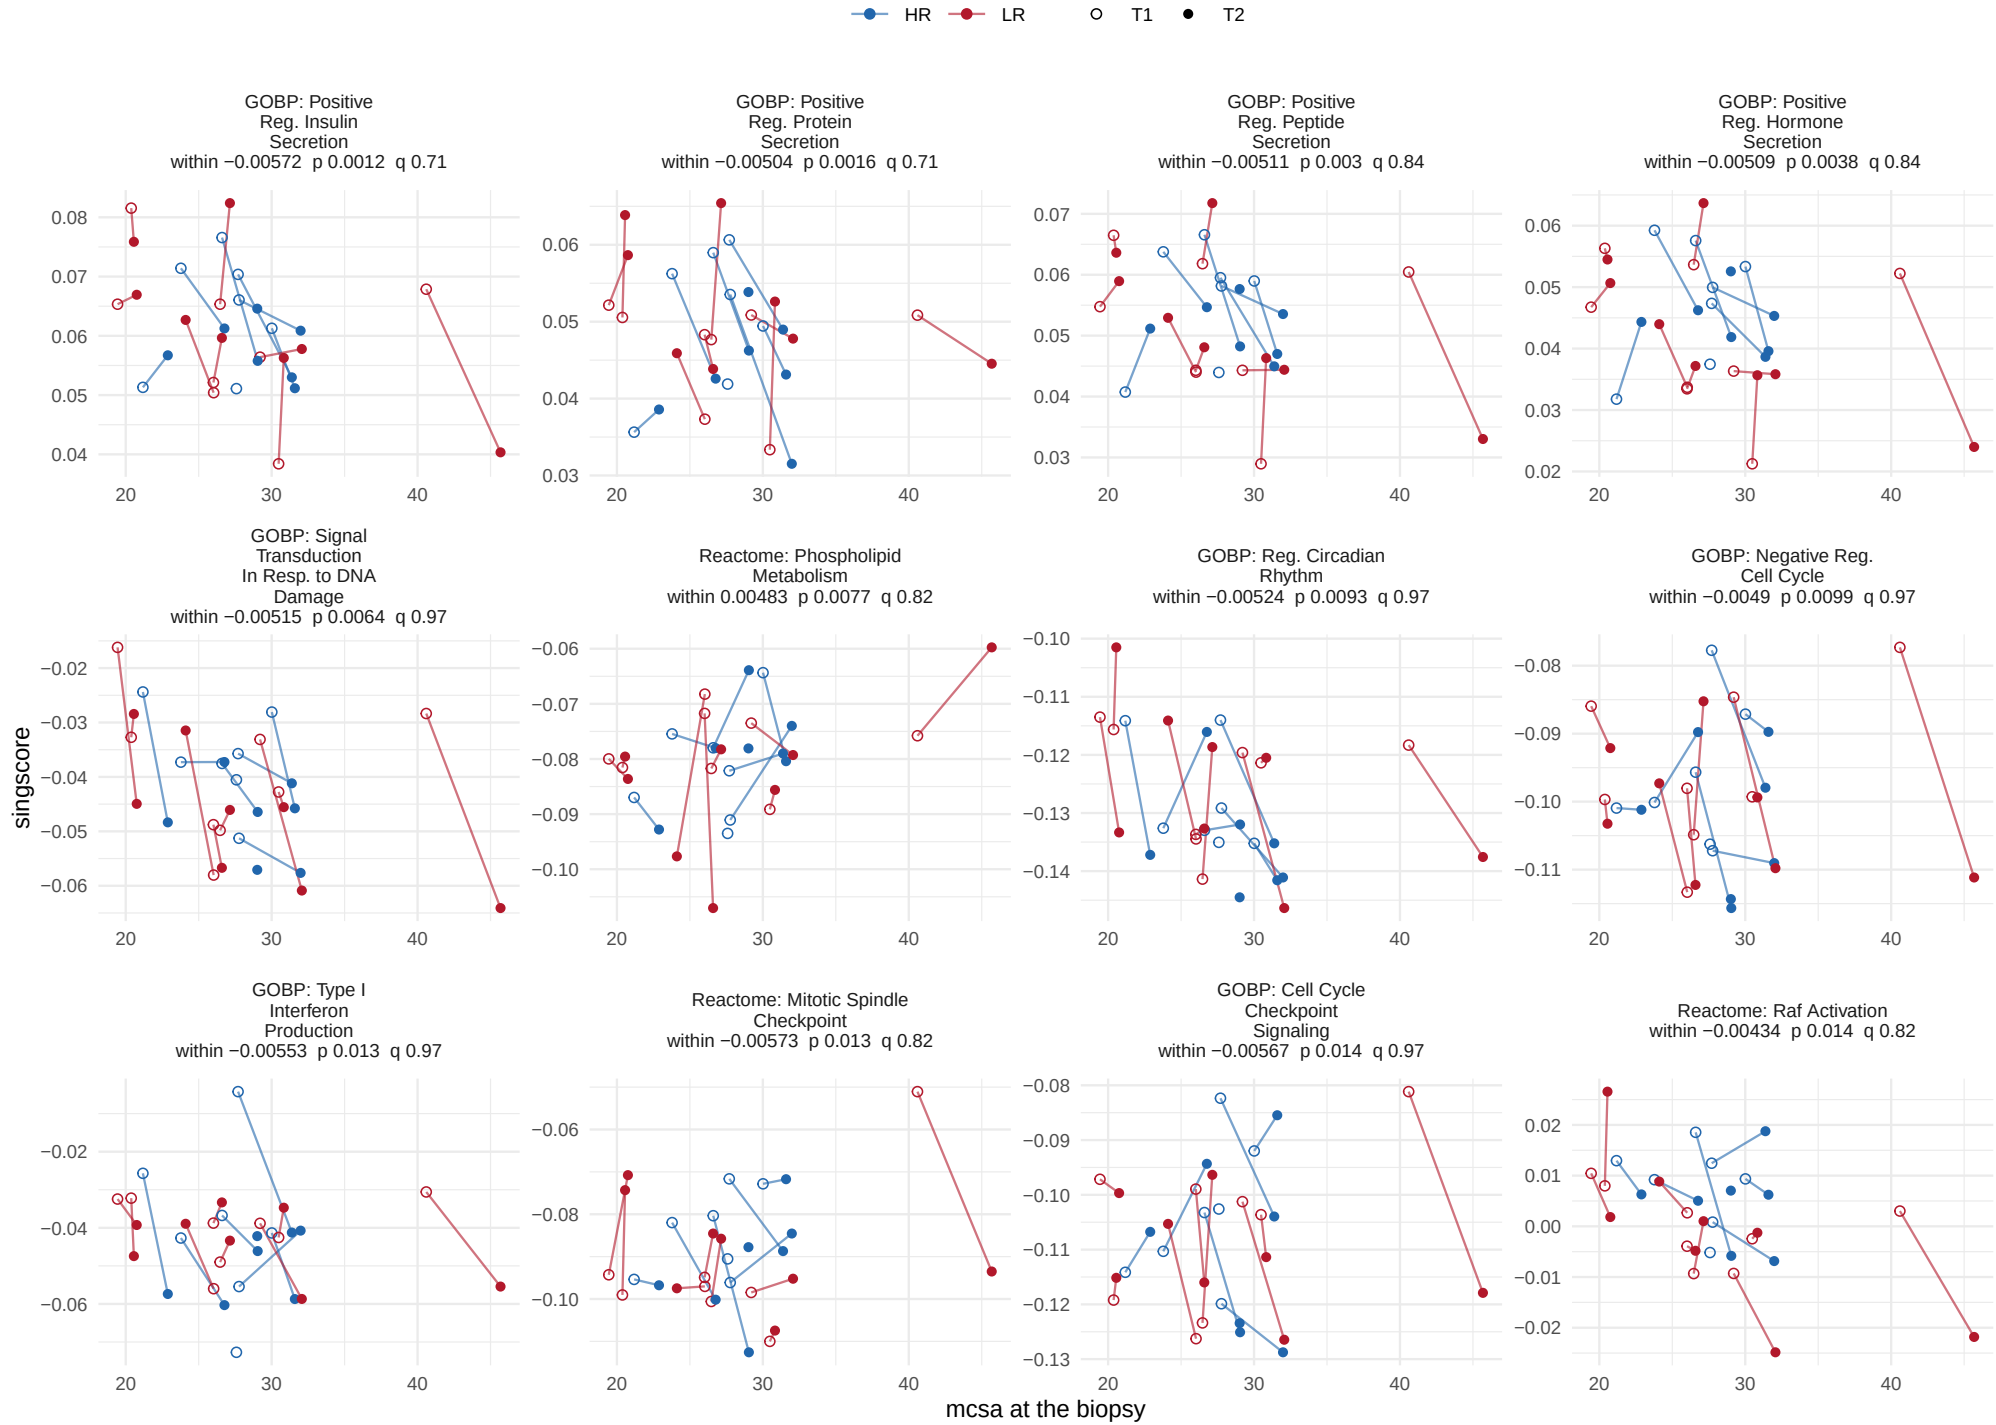

limma on 30 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

mcsa, within−person term


62 of 1378 sets at p < 0.05, 0 at BH < 0.05.

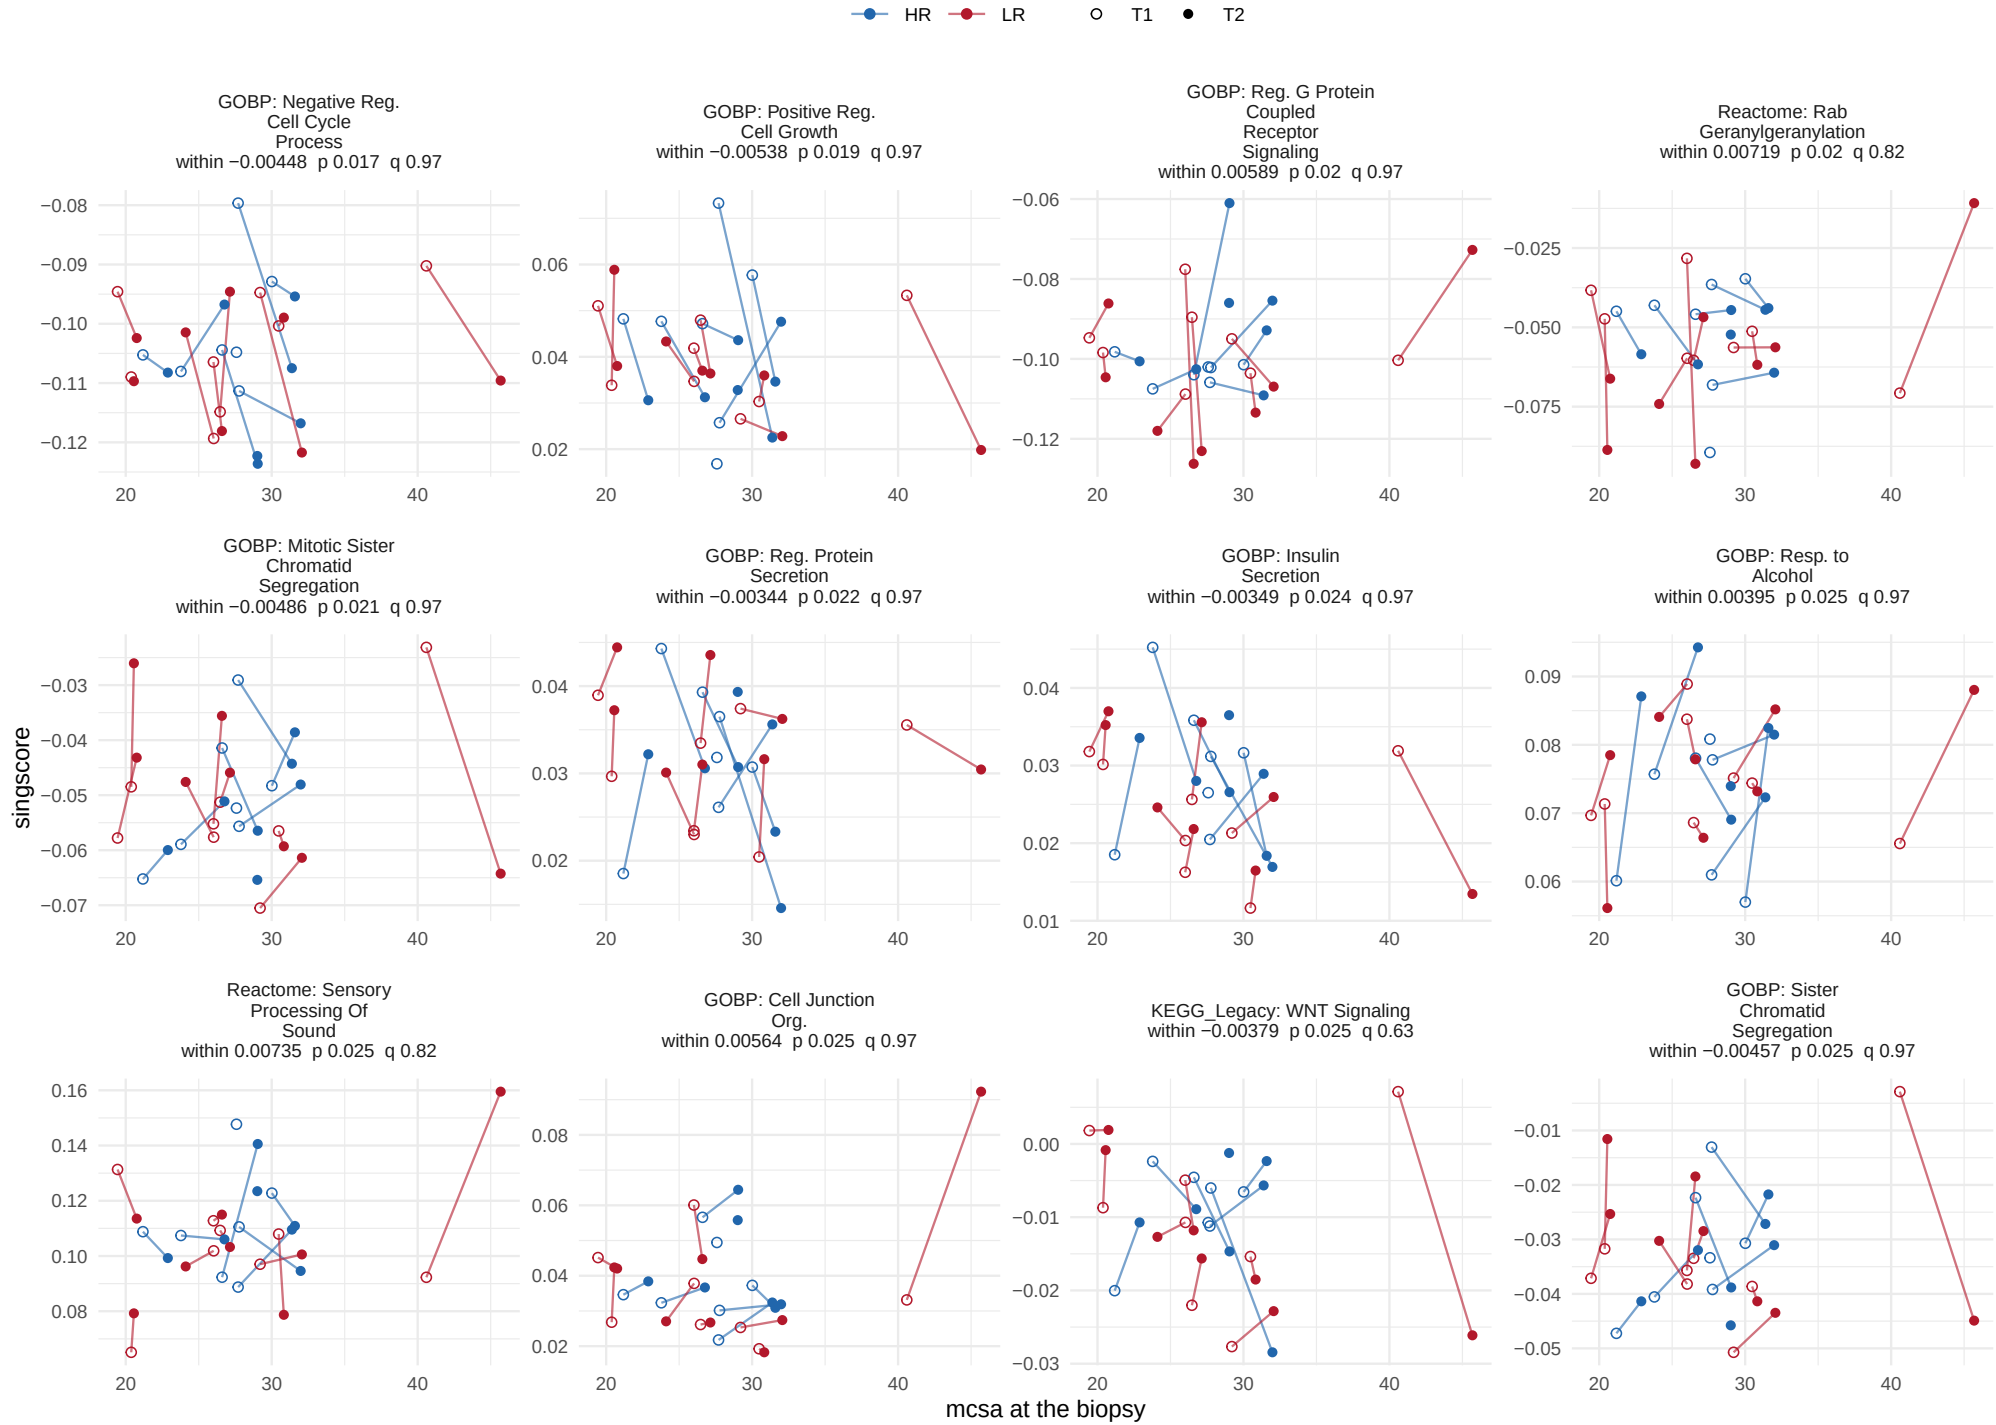

limma on 30 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

mcsa, within−person term


62 of 1378 sets at p < 0.05, 0 at BH < 0.05.

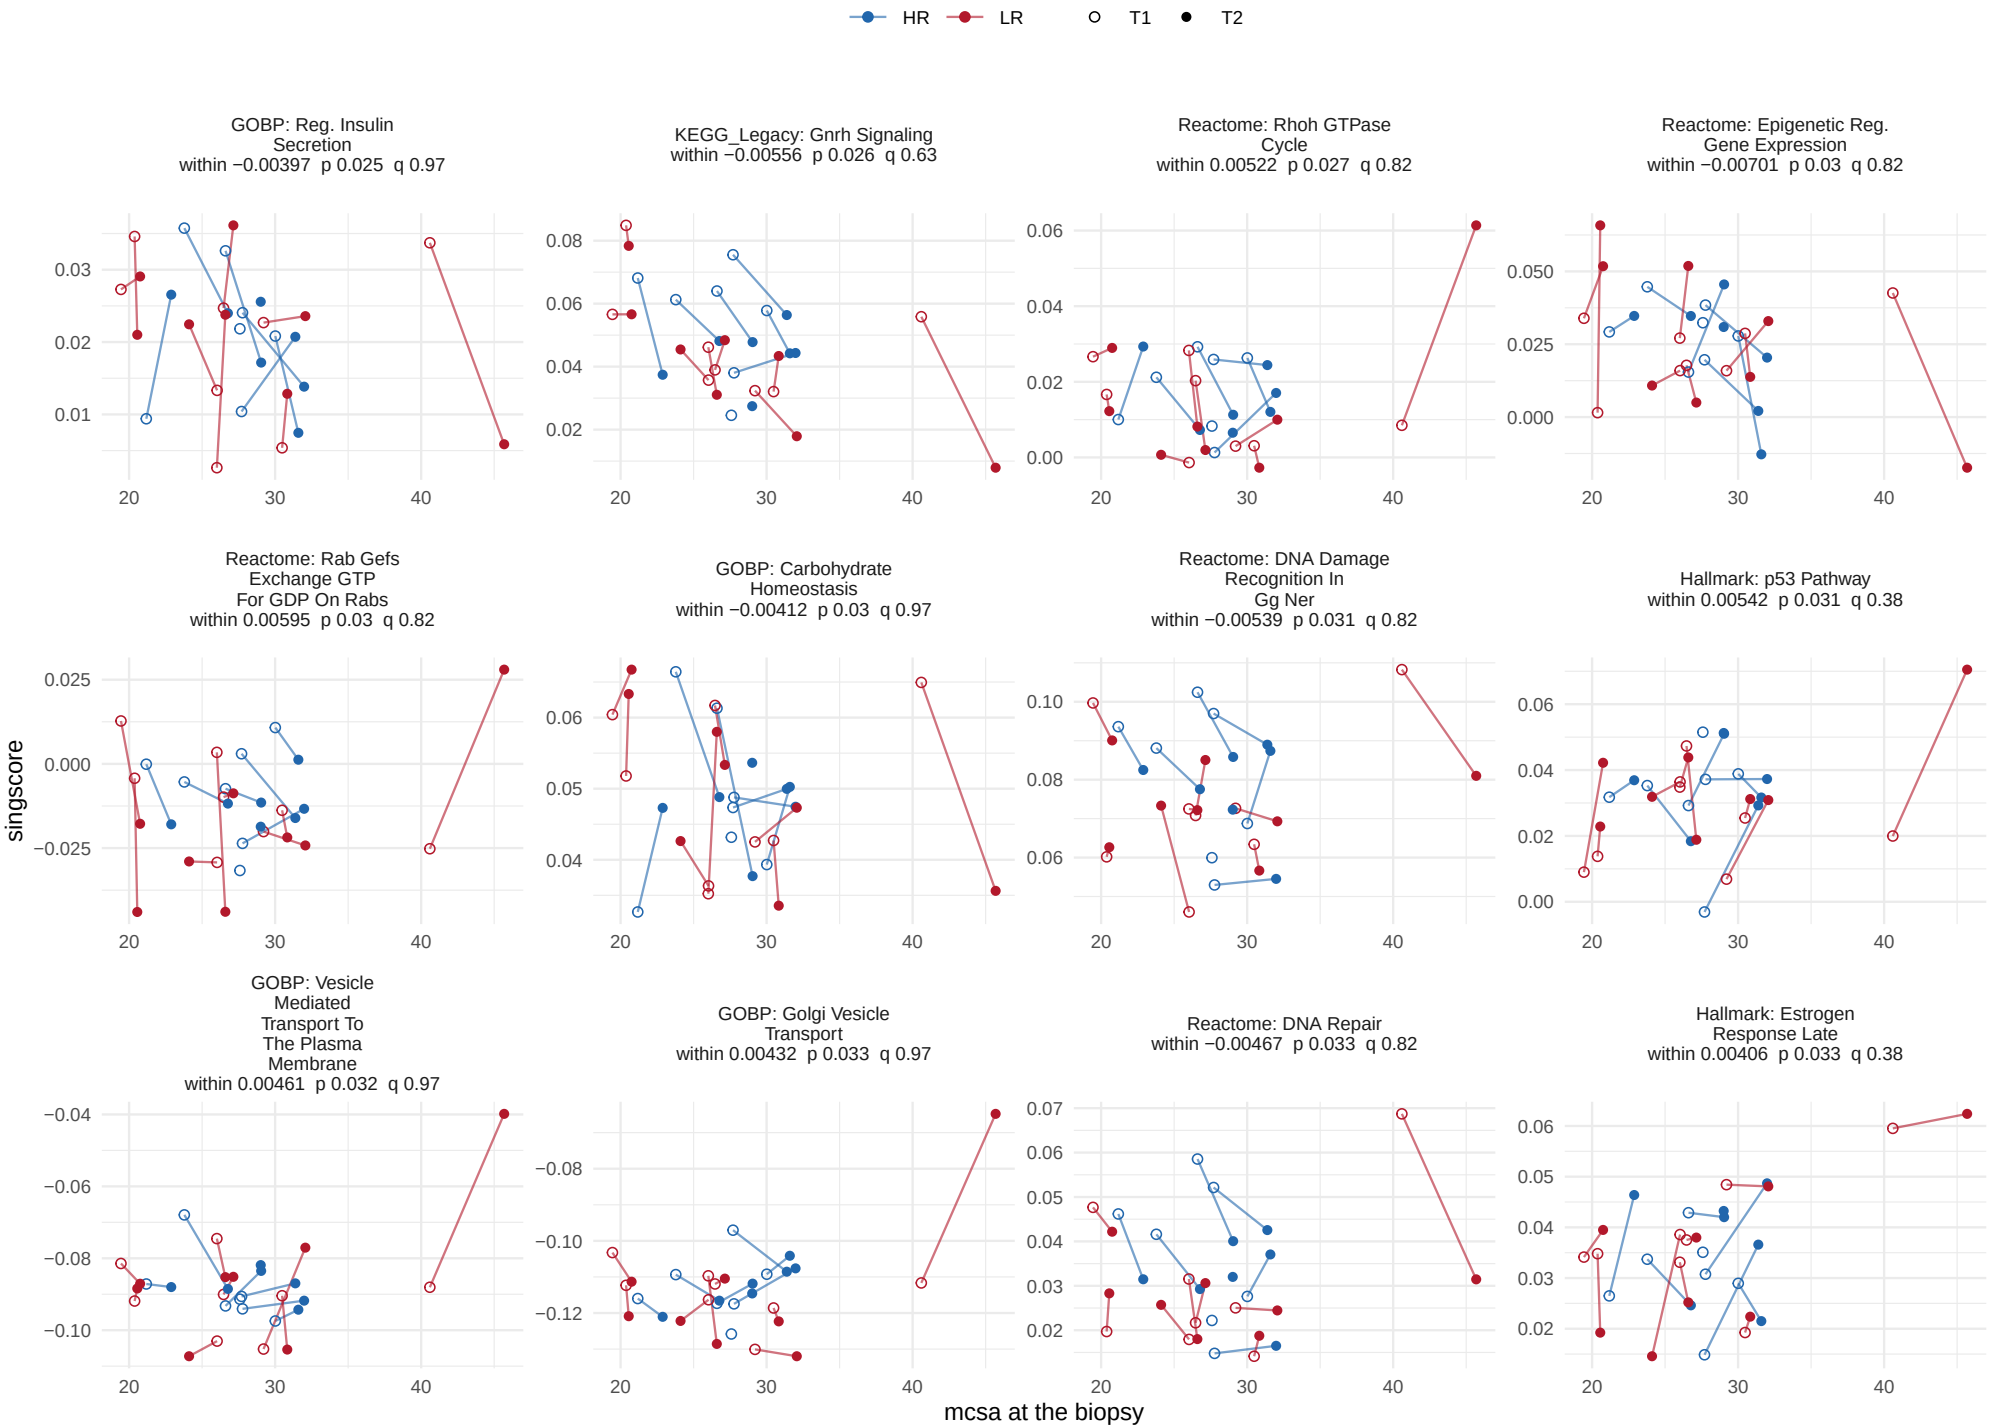

limma on 30 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

mcsa, within−person term


62 of 1378 sets at p < 0.05, 0 at BH < 0.05.

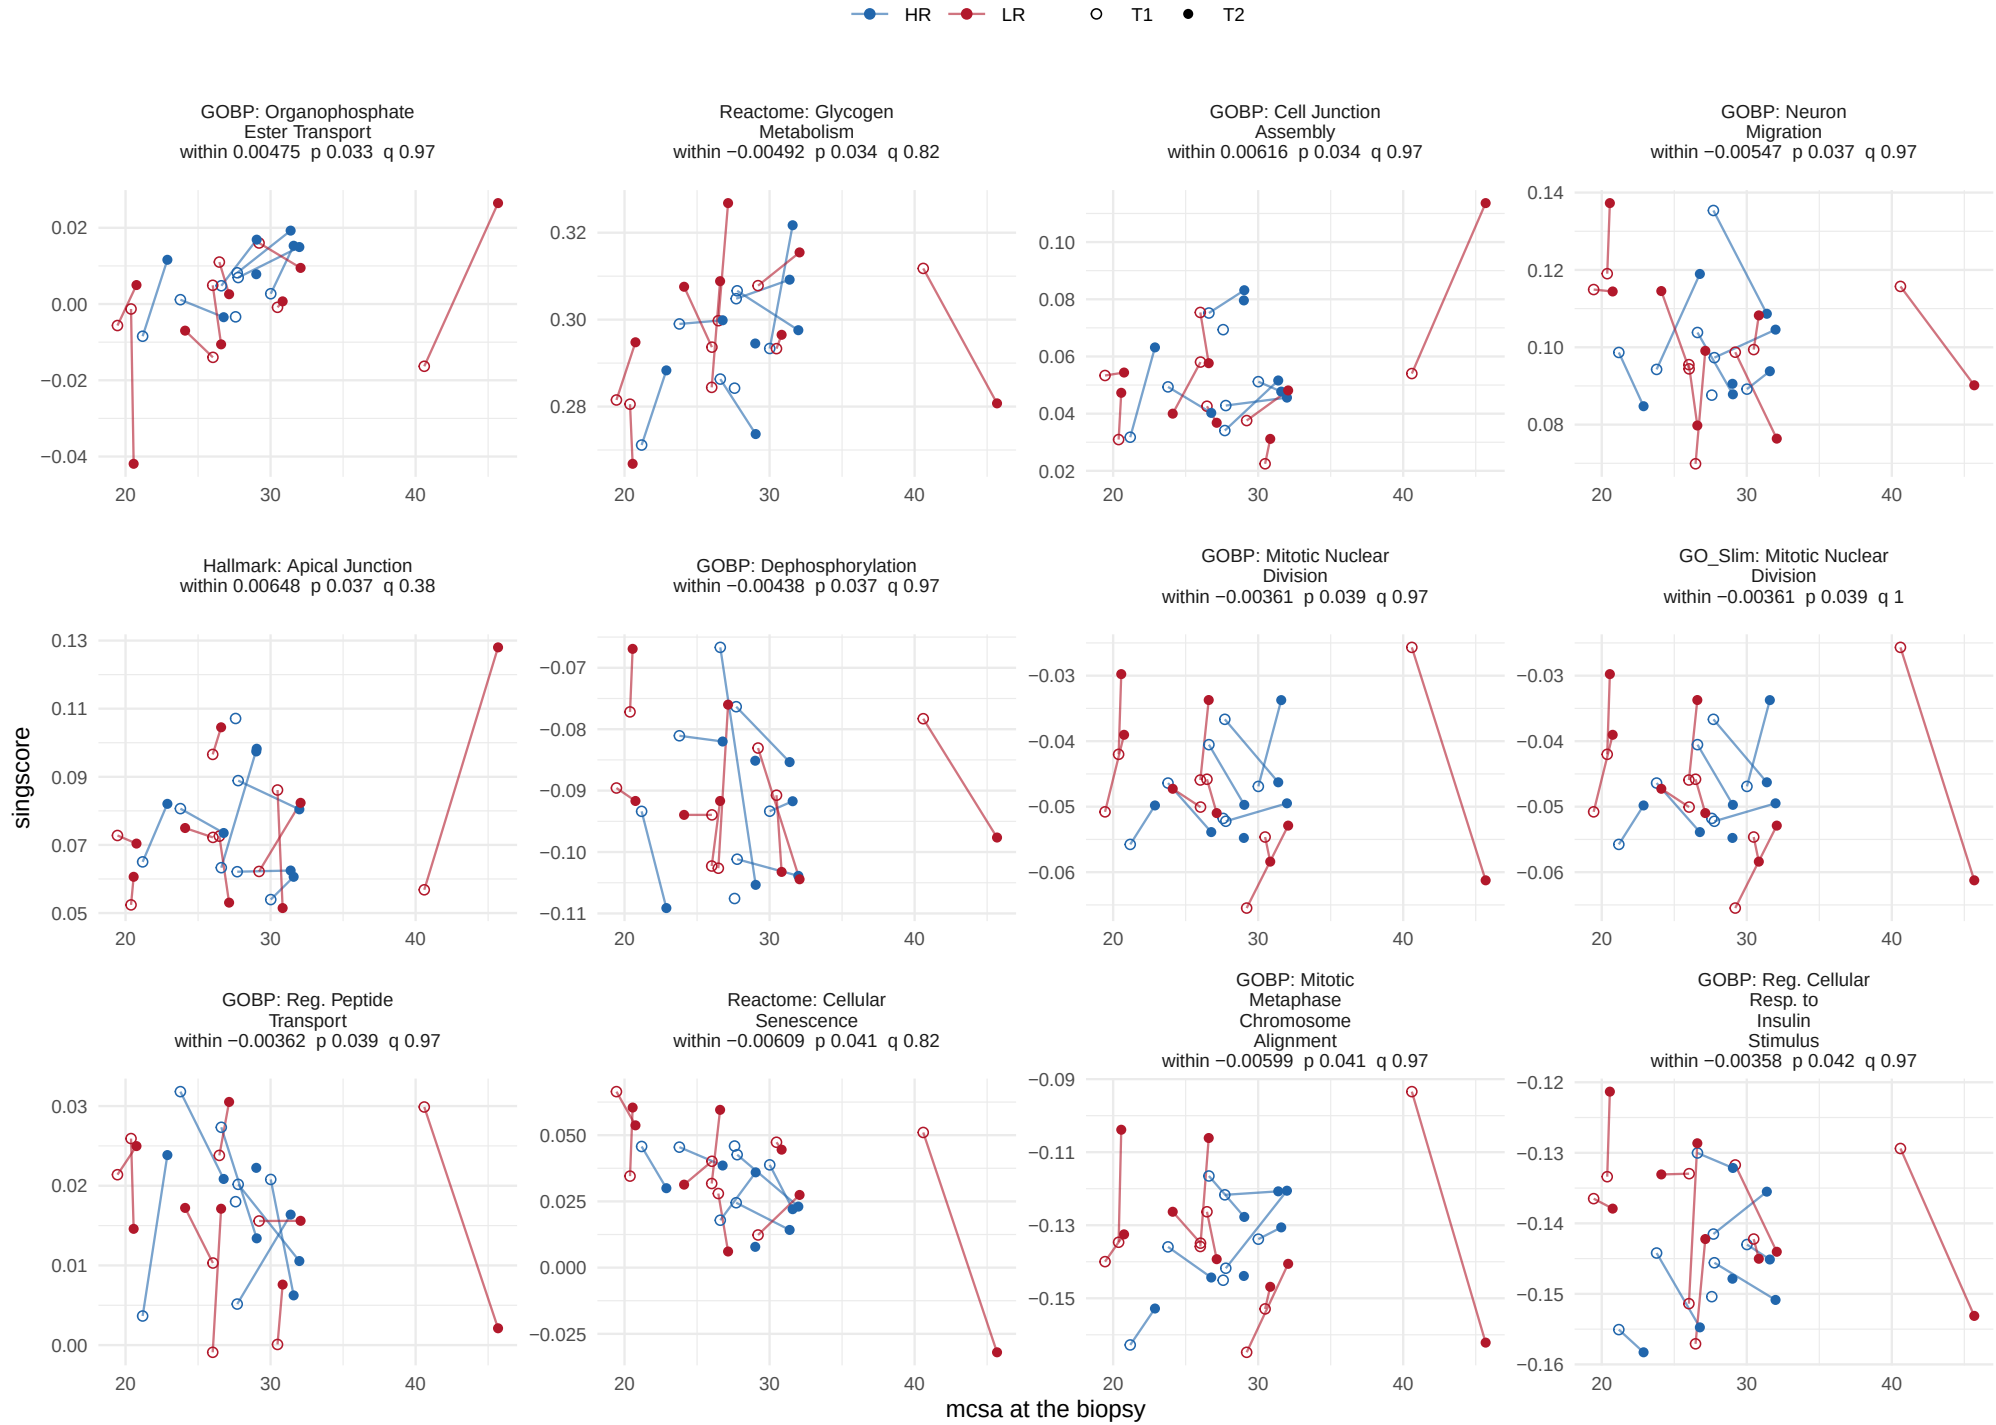

limma on 30 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

mcsa, within−person term


62 of 1378 sets at p < 0.05, 0 at BH < 0.05.

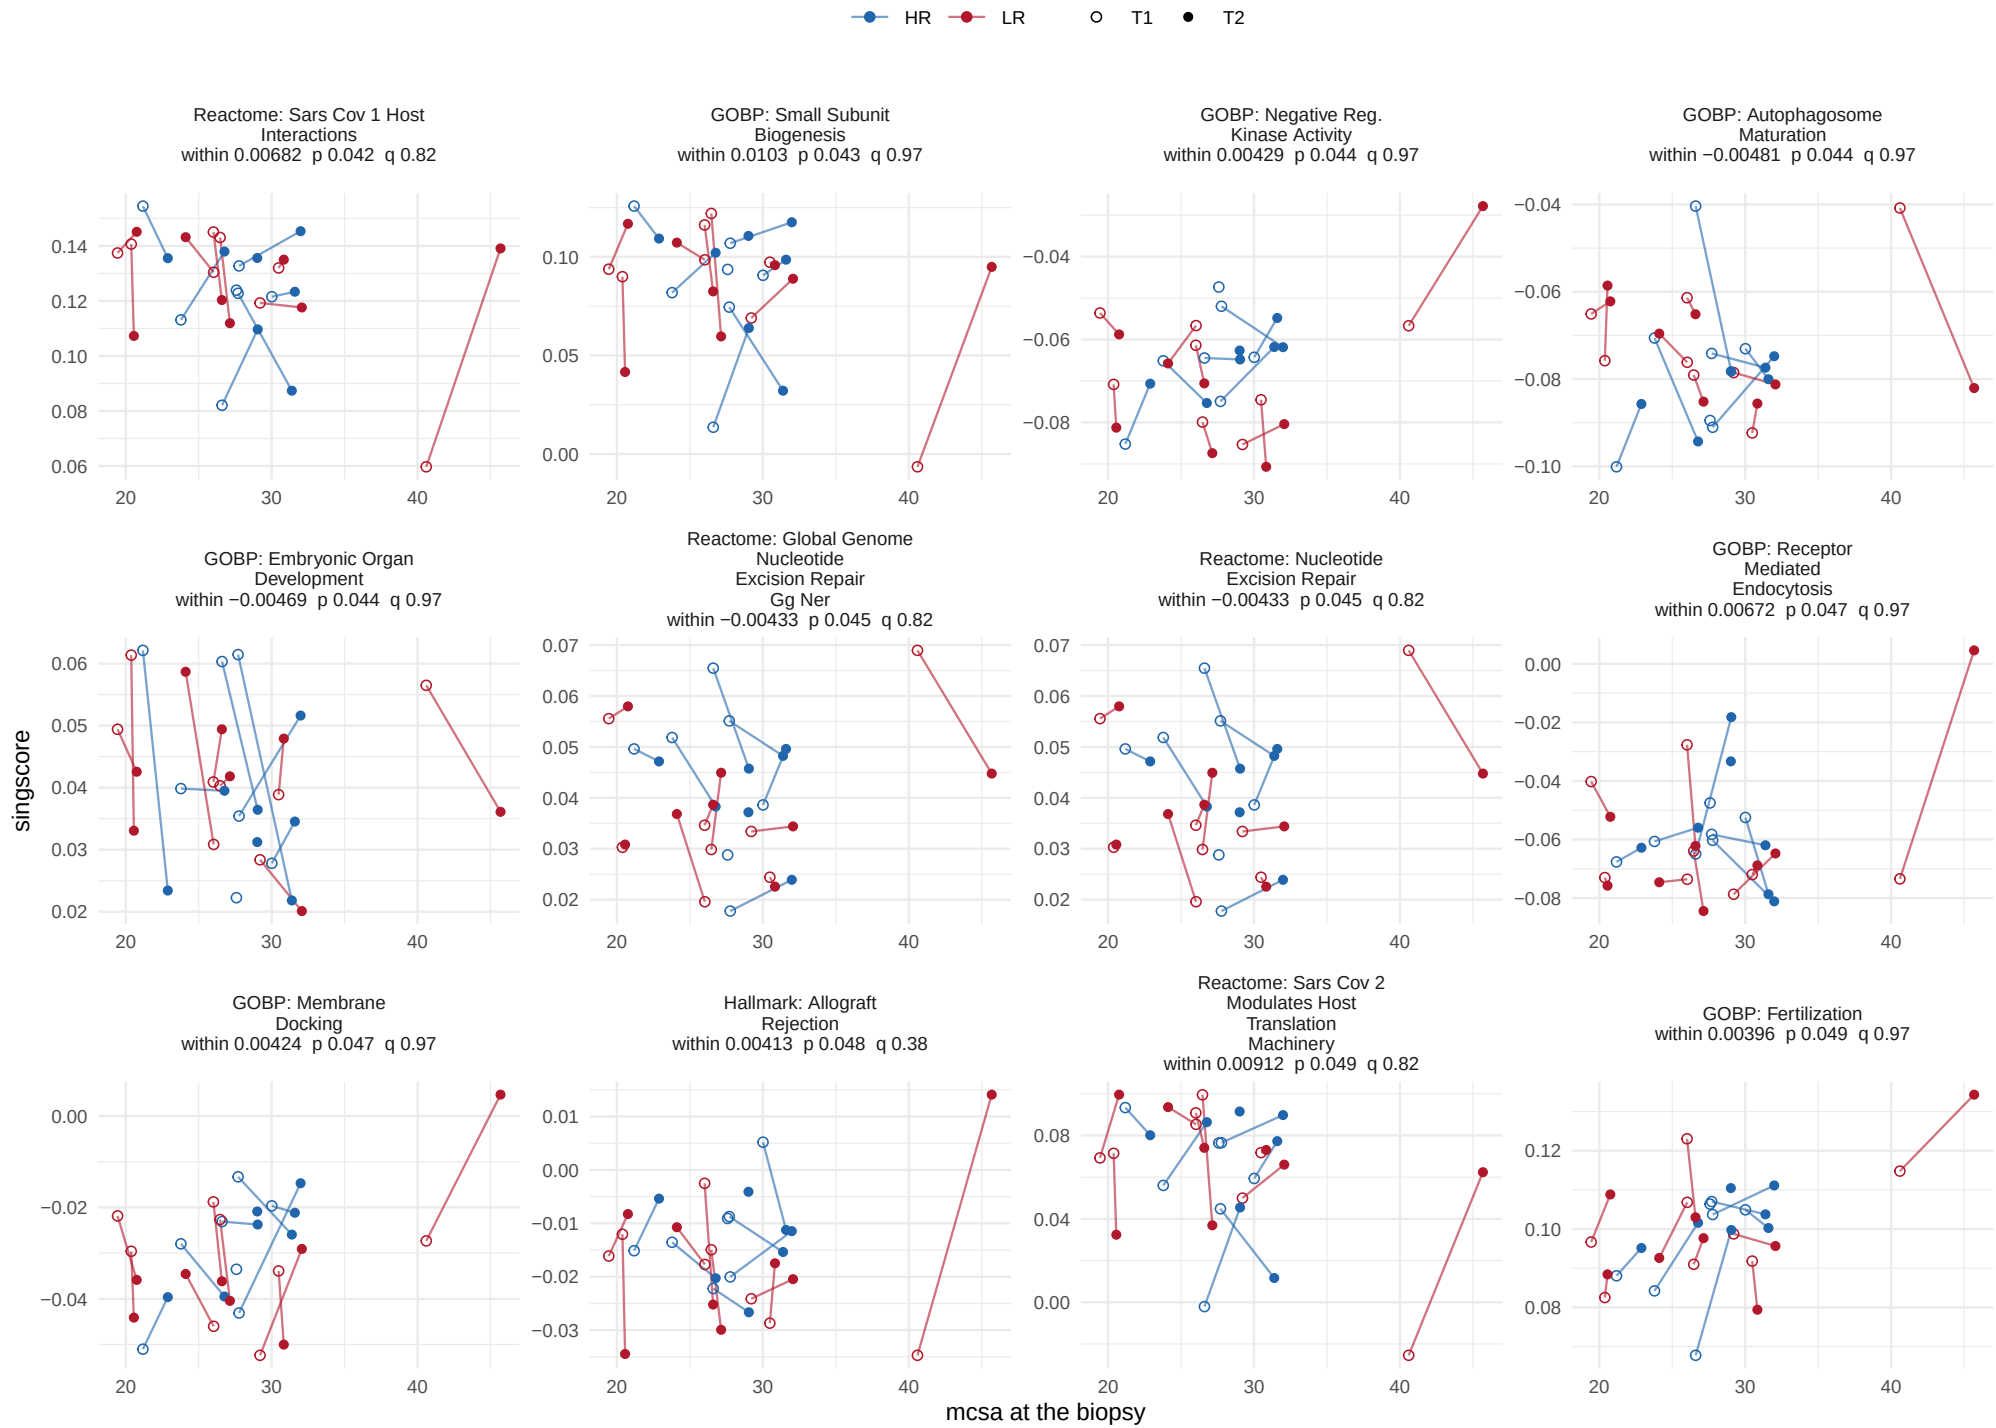

limma on 30 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

mcsa, within−person term


62 of 1378 sets at p < 0.05, 0 at BH < 0.05.

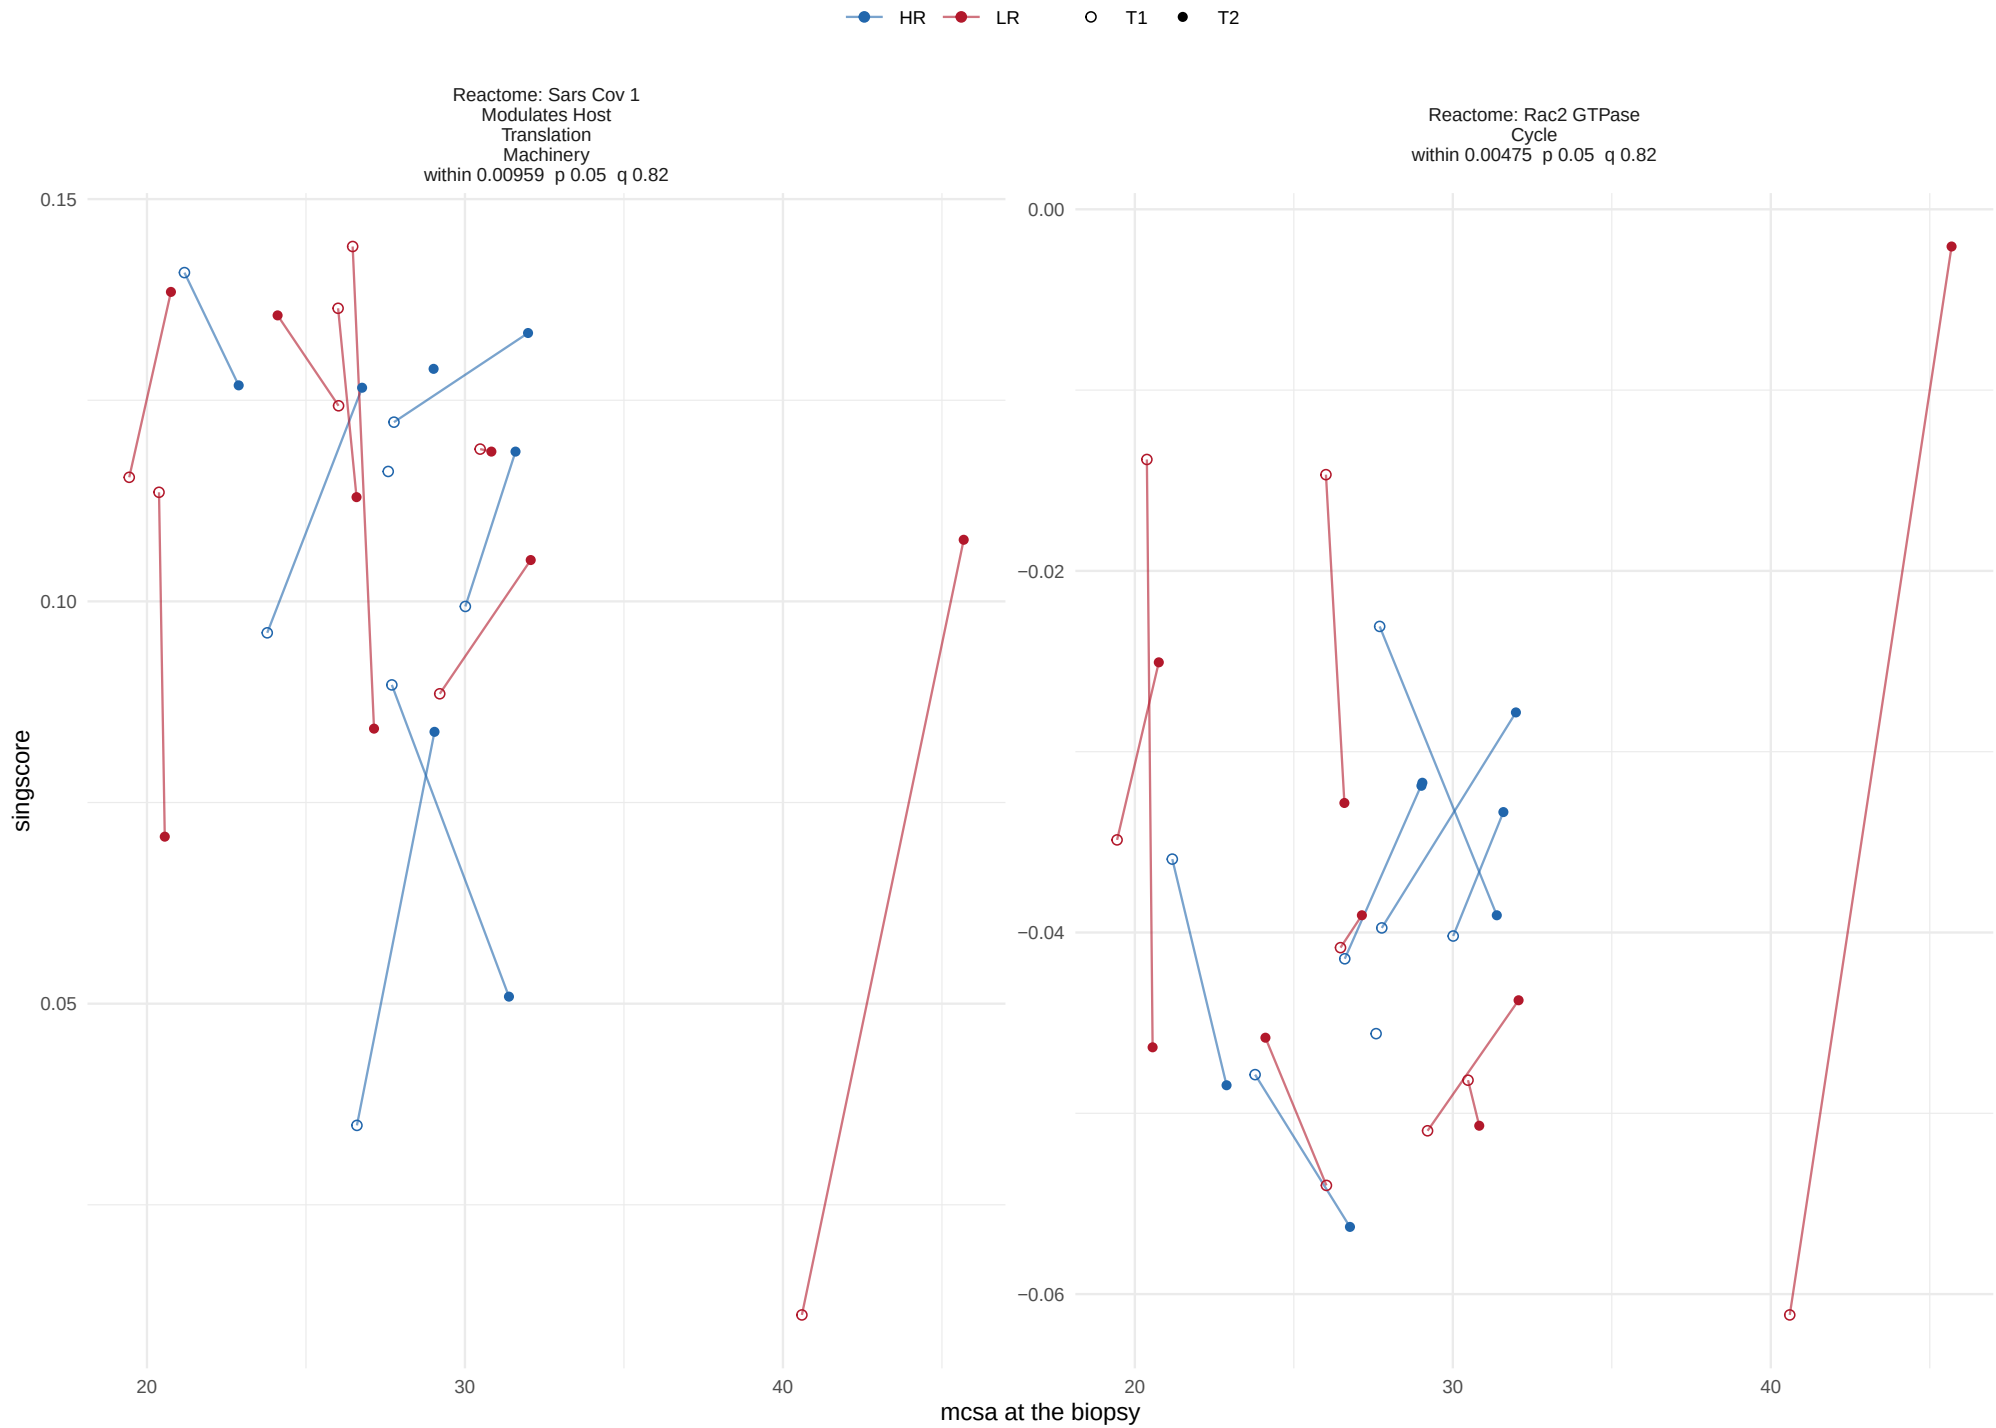

limma on 30 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

type1_share, between−person term


7 of 1378 sets at p < 0.05, 0 at BH < 0.05.

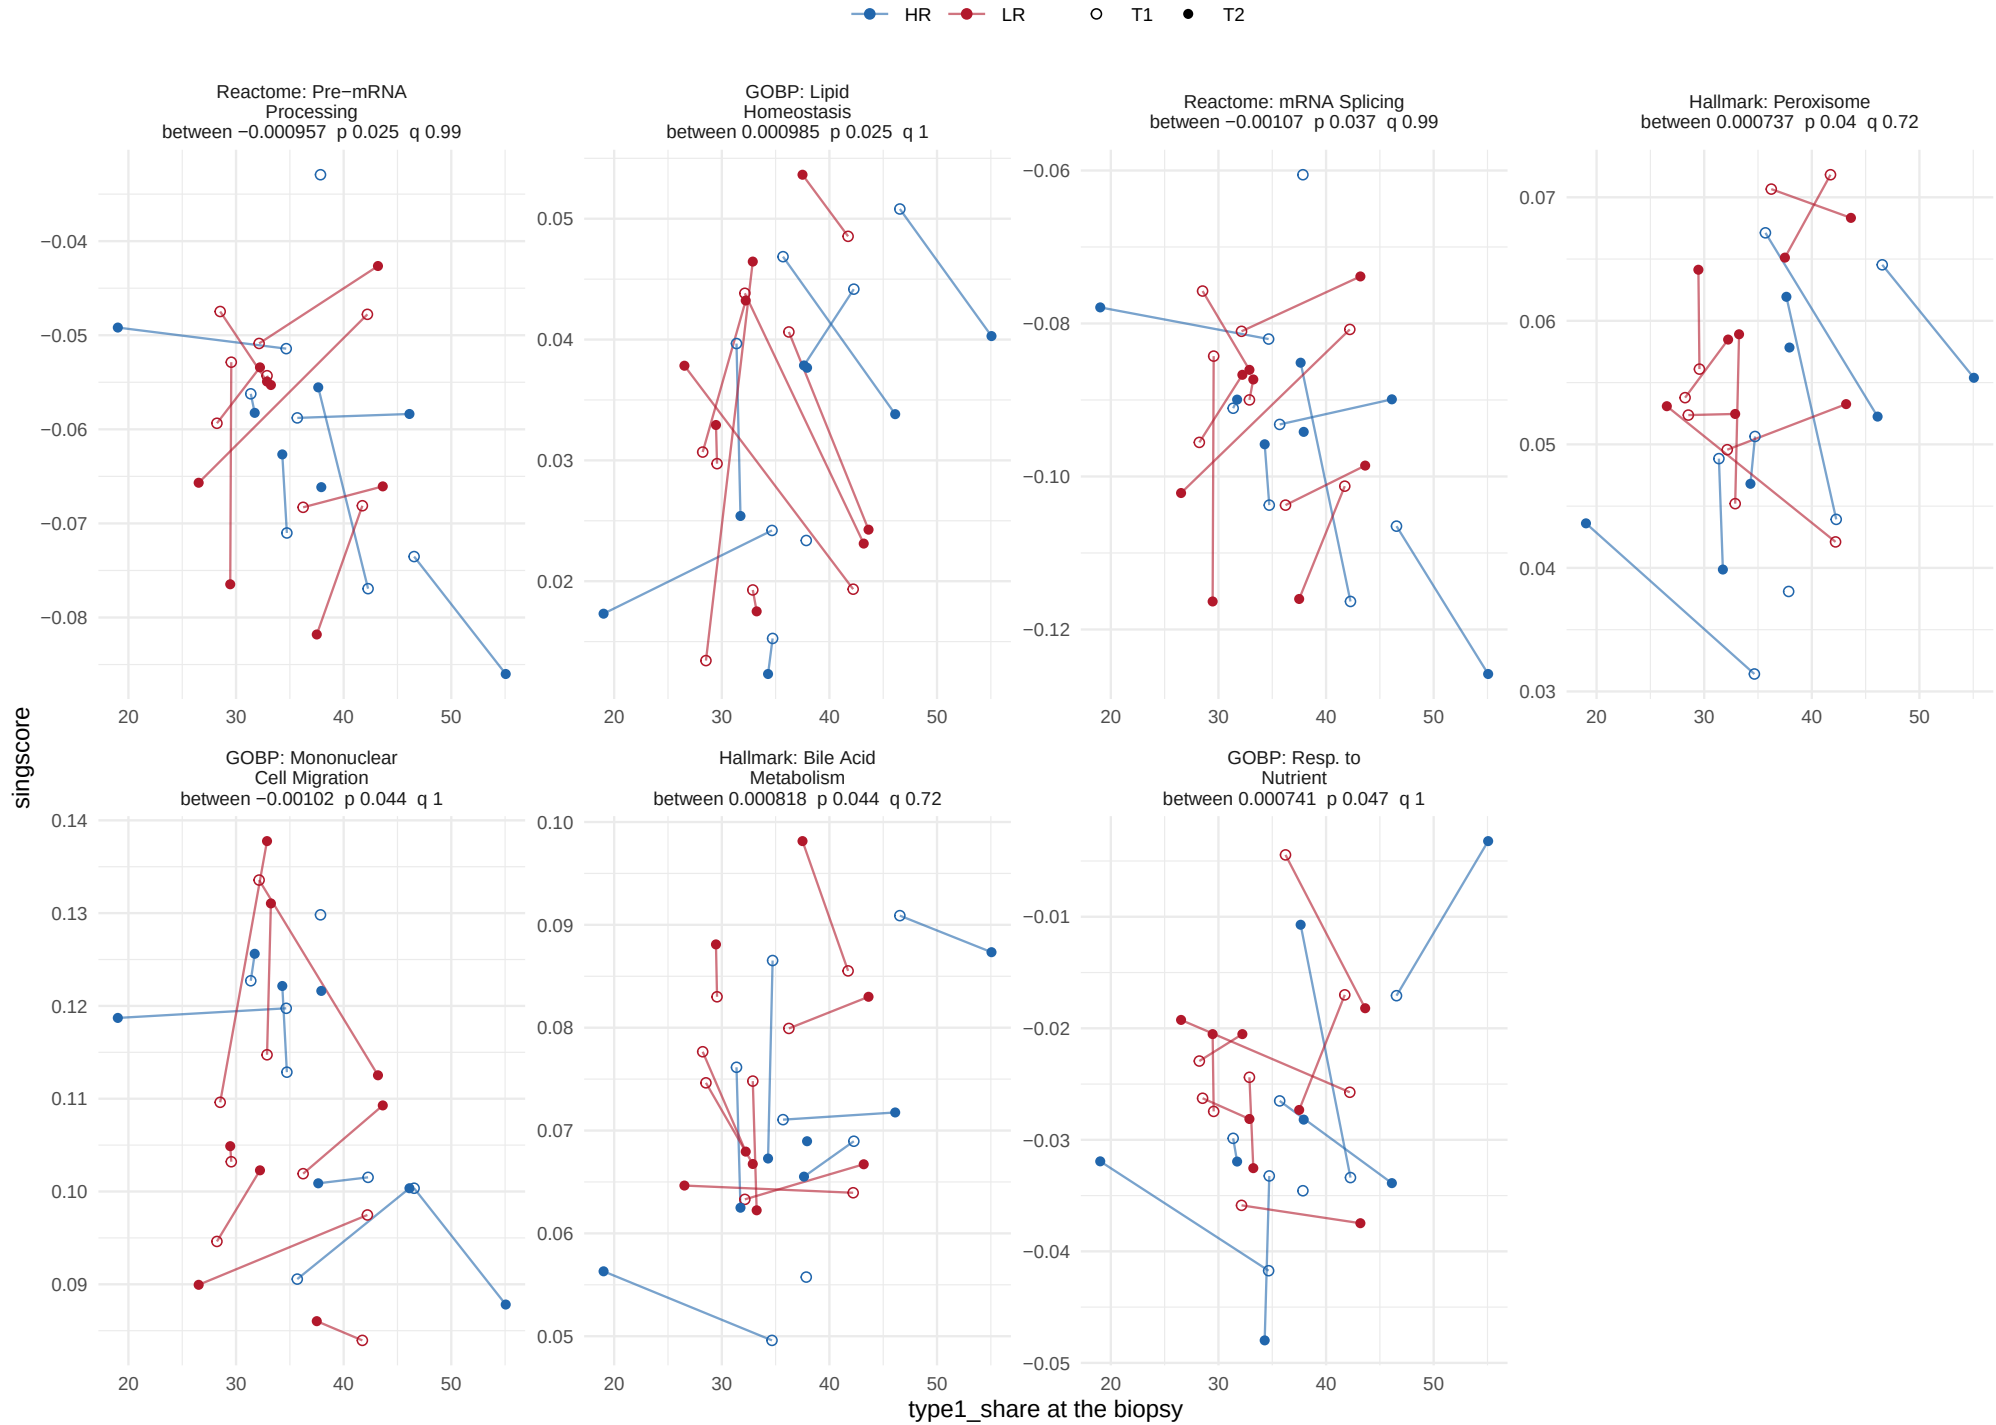

limma on 30 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

type1_share, within−person term


34 of 1378 sets at p < 0.05, 0 at BH < 0.05.

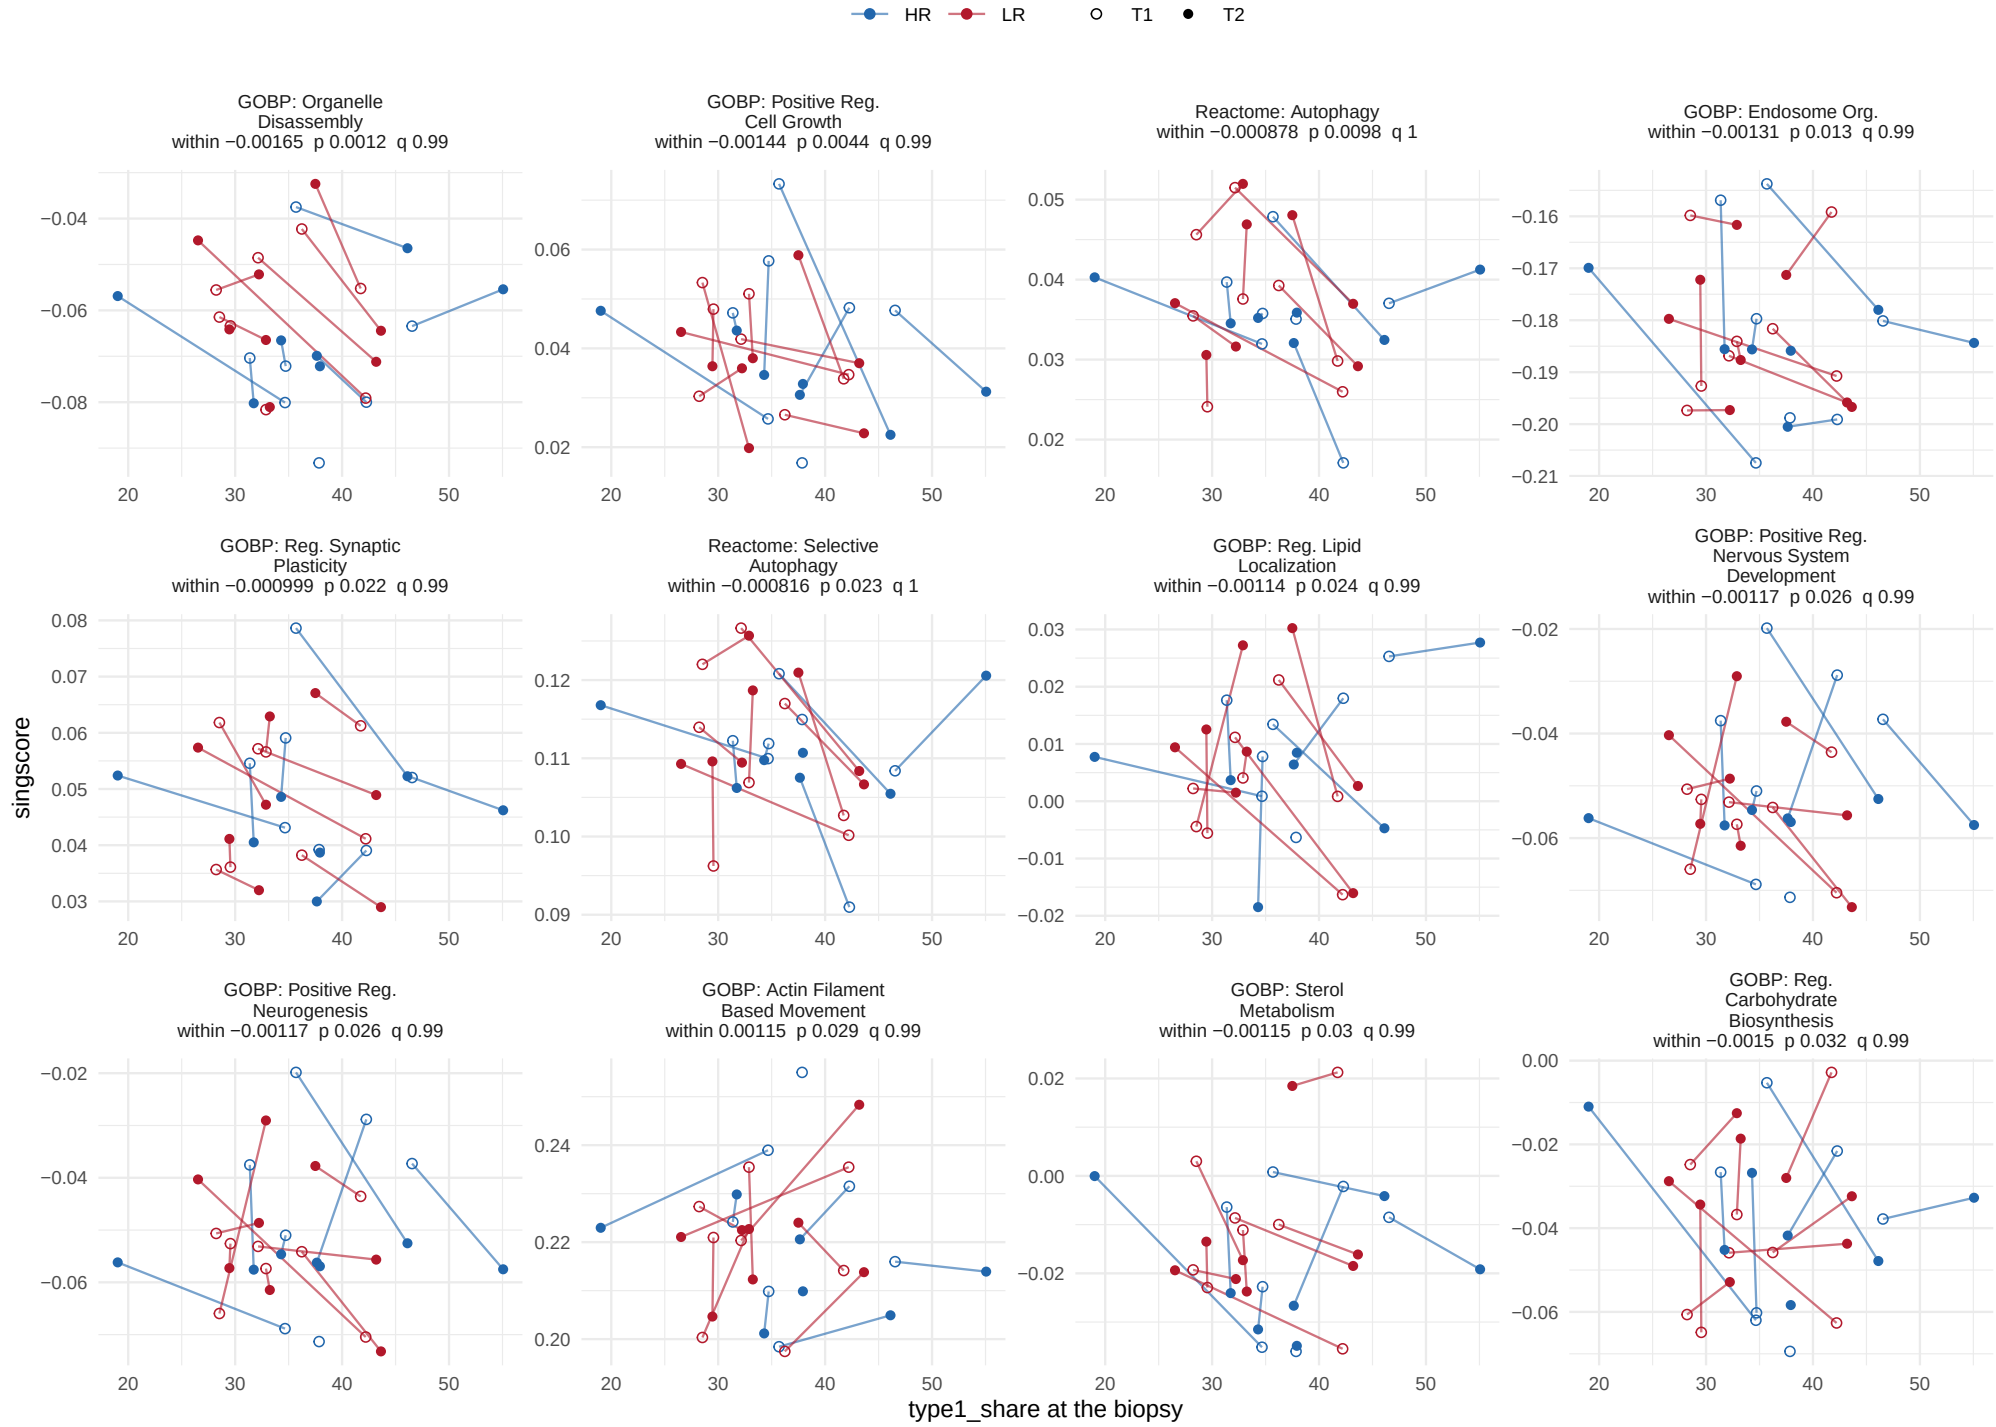

limma on 30 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

type1_share, within−person term


34 of 1378 sets at p < 0.05, 0 at BH < 0.05.

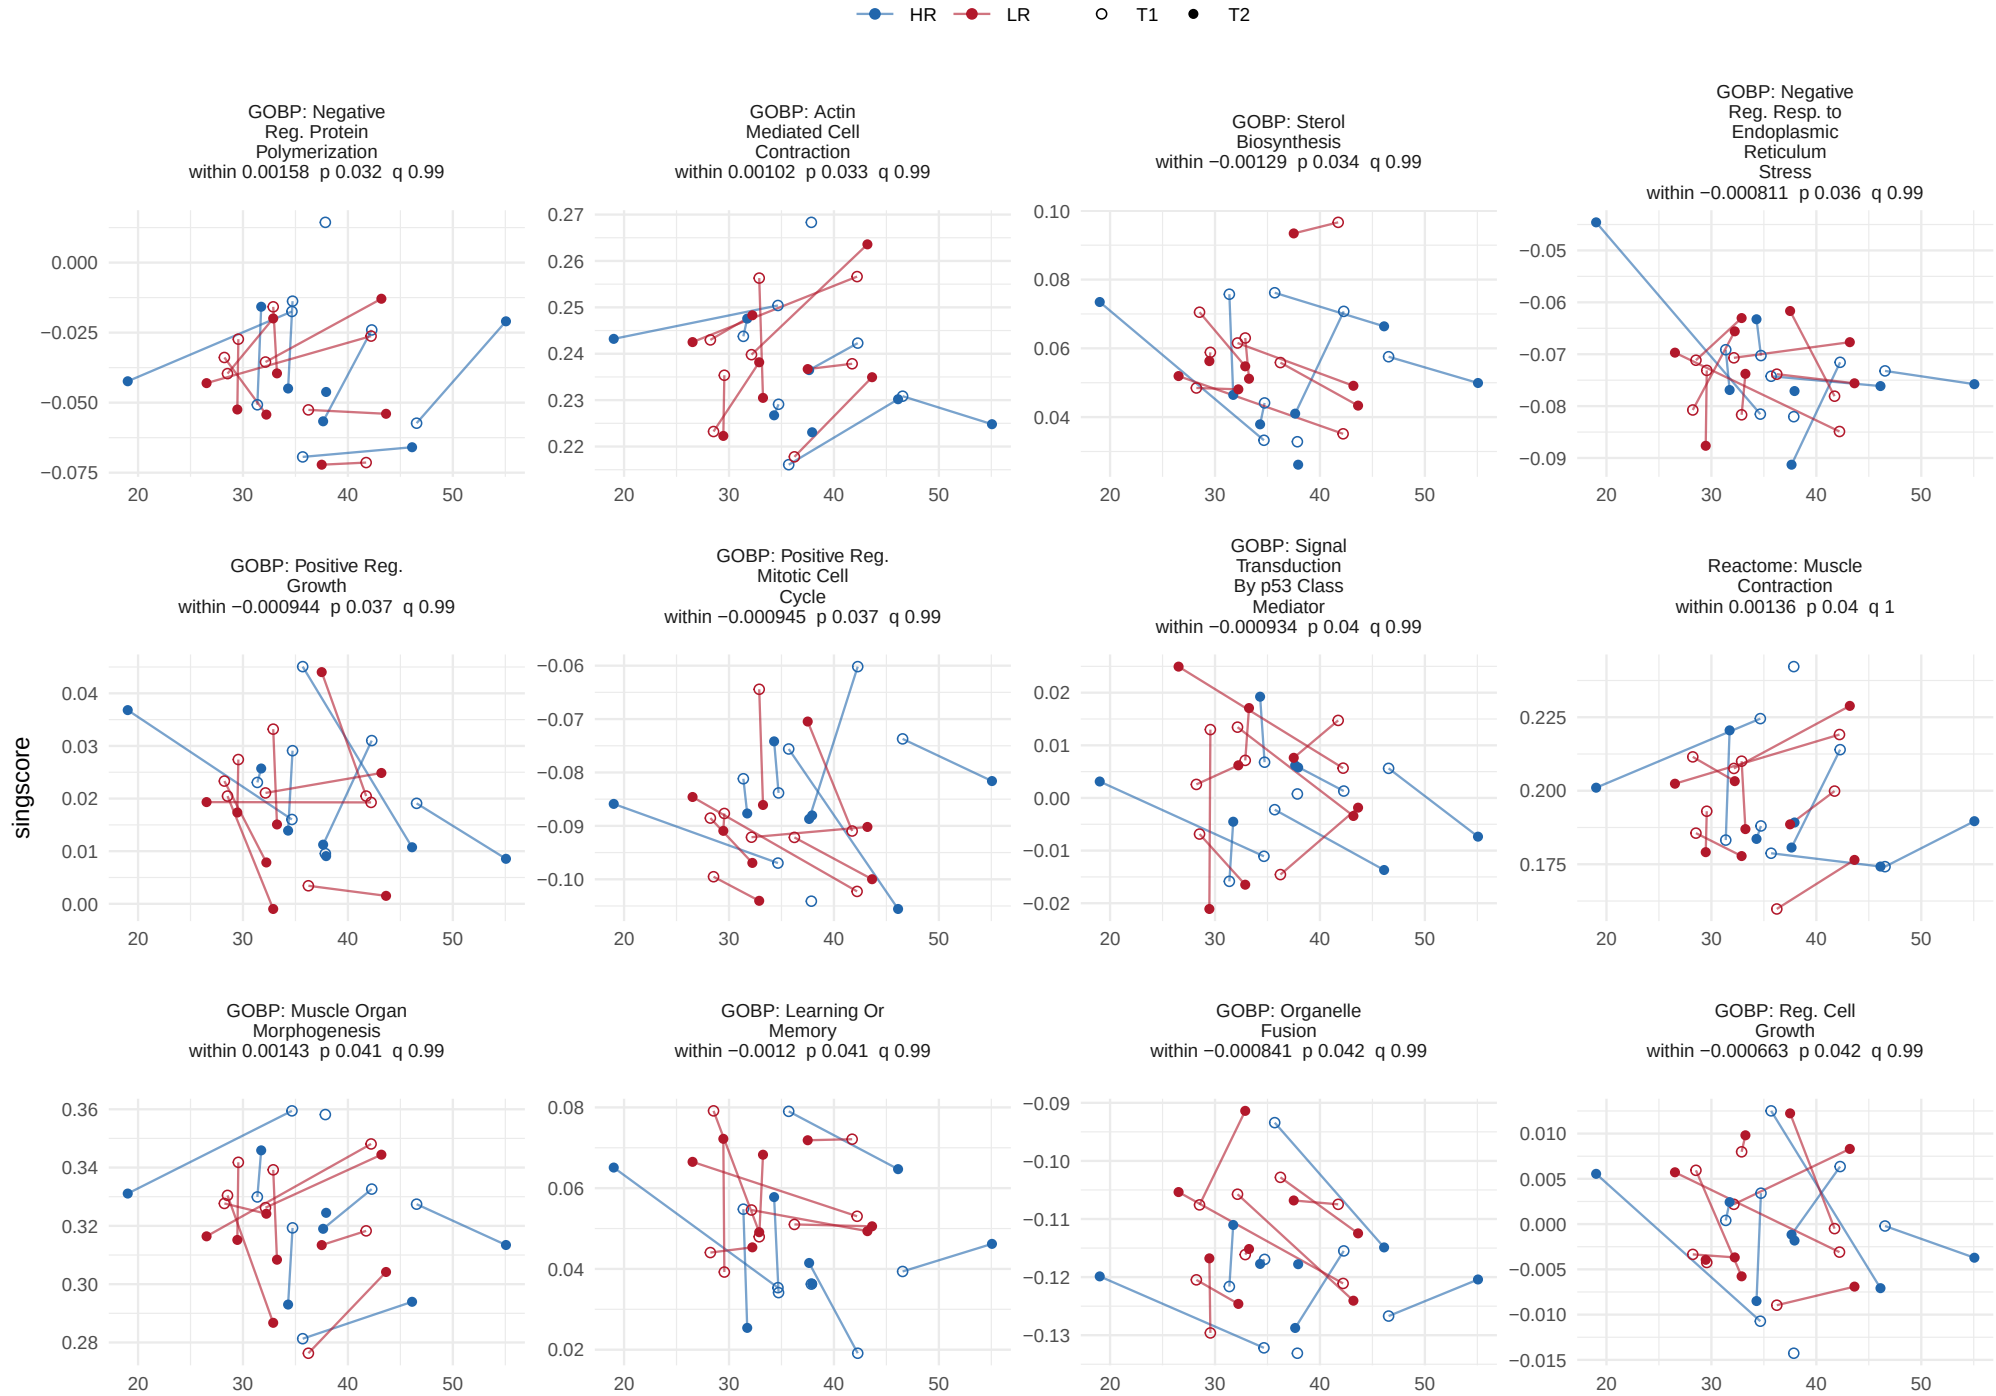

limma on 30 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

type1_share, within−person term


34 of 1378 sets at p < 0.05, 0 at BH < 0.05.

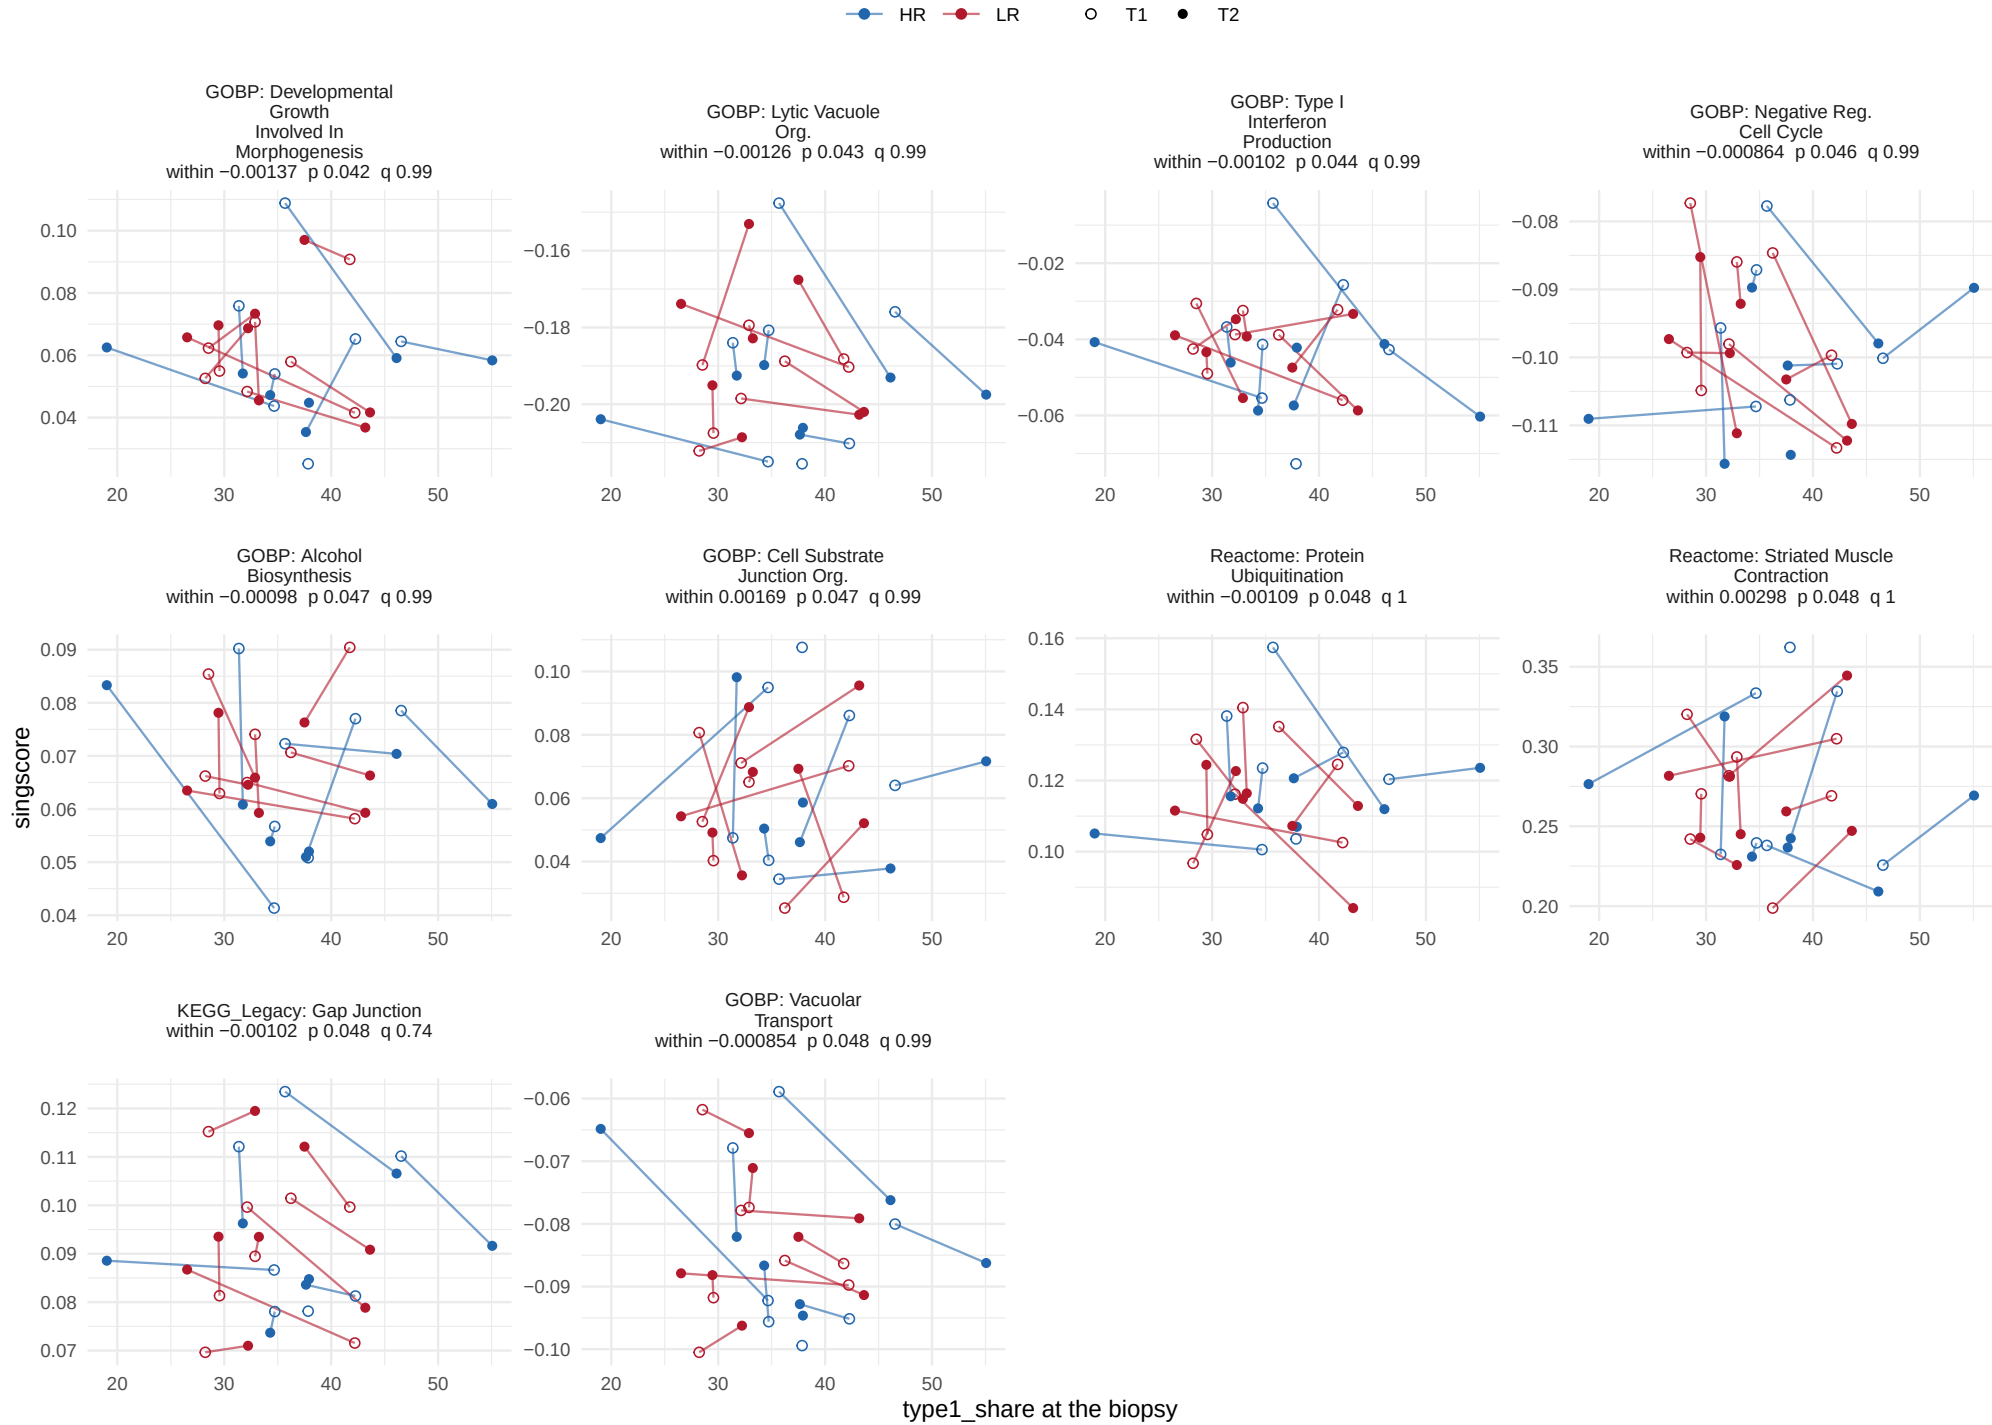

limma on 30 biopsies, abundance ~ timepoint + between + within, subject blocked. Lines join each subject's T1 and T2 biopsies: the within term reads their slopes, the between term the spread of subjects. Header: effect per trait unit, p, and BH q within trait, term and collection. Table: c_data/04_associate.xlsx, model.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

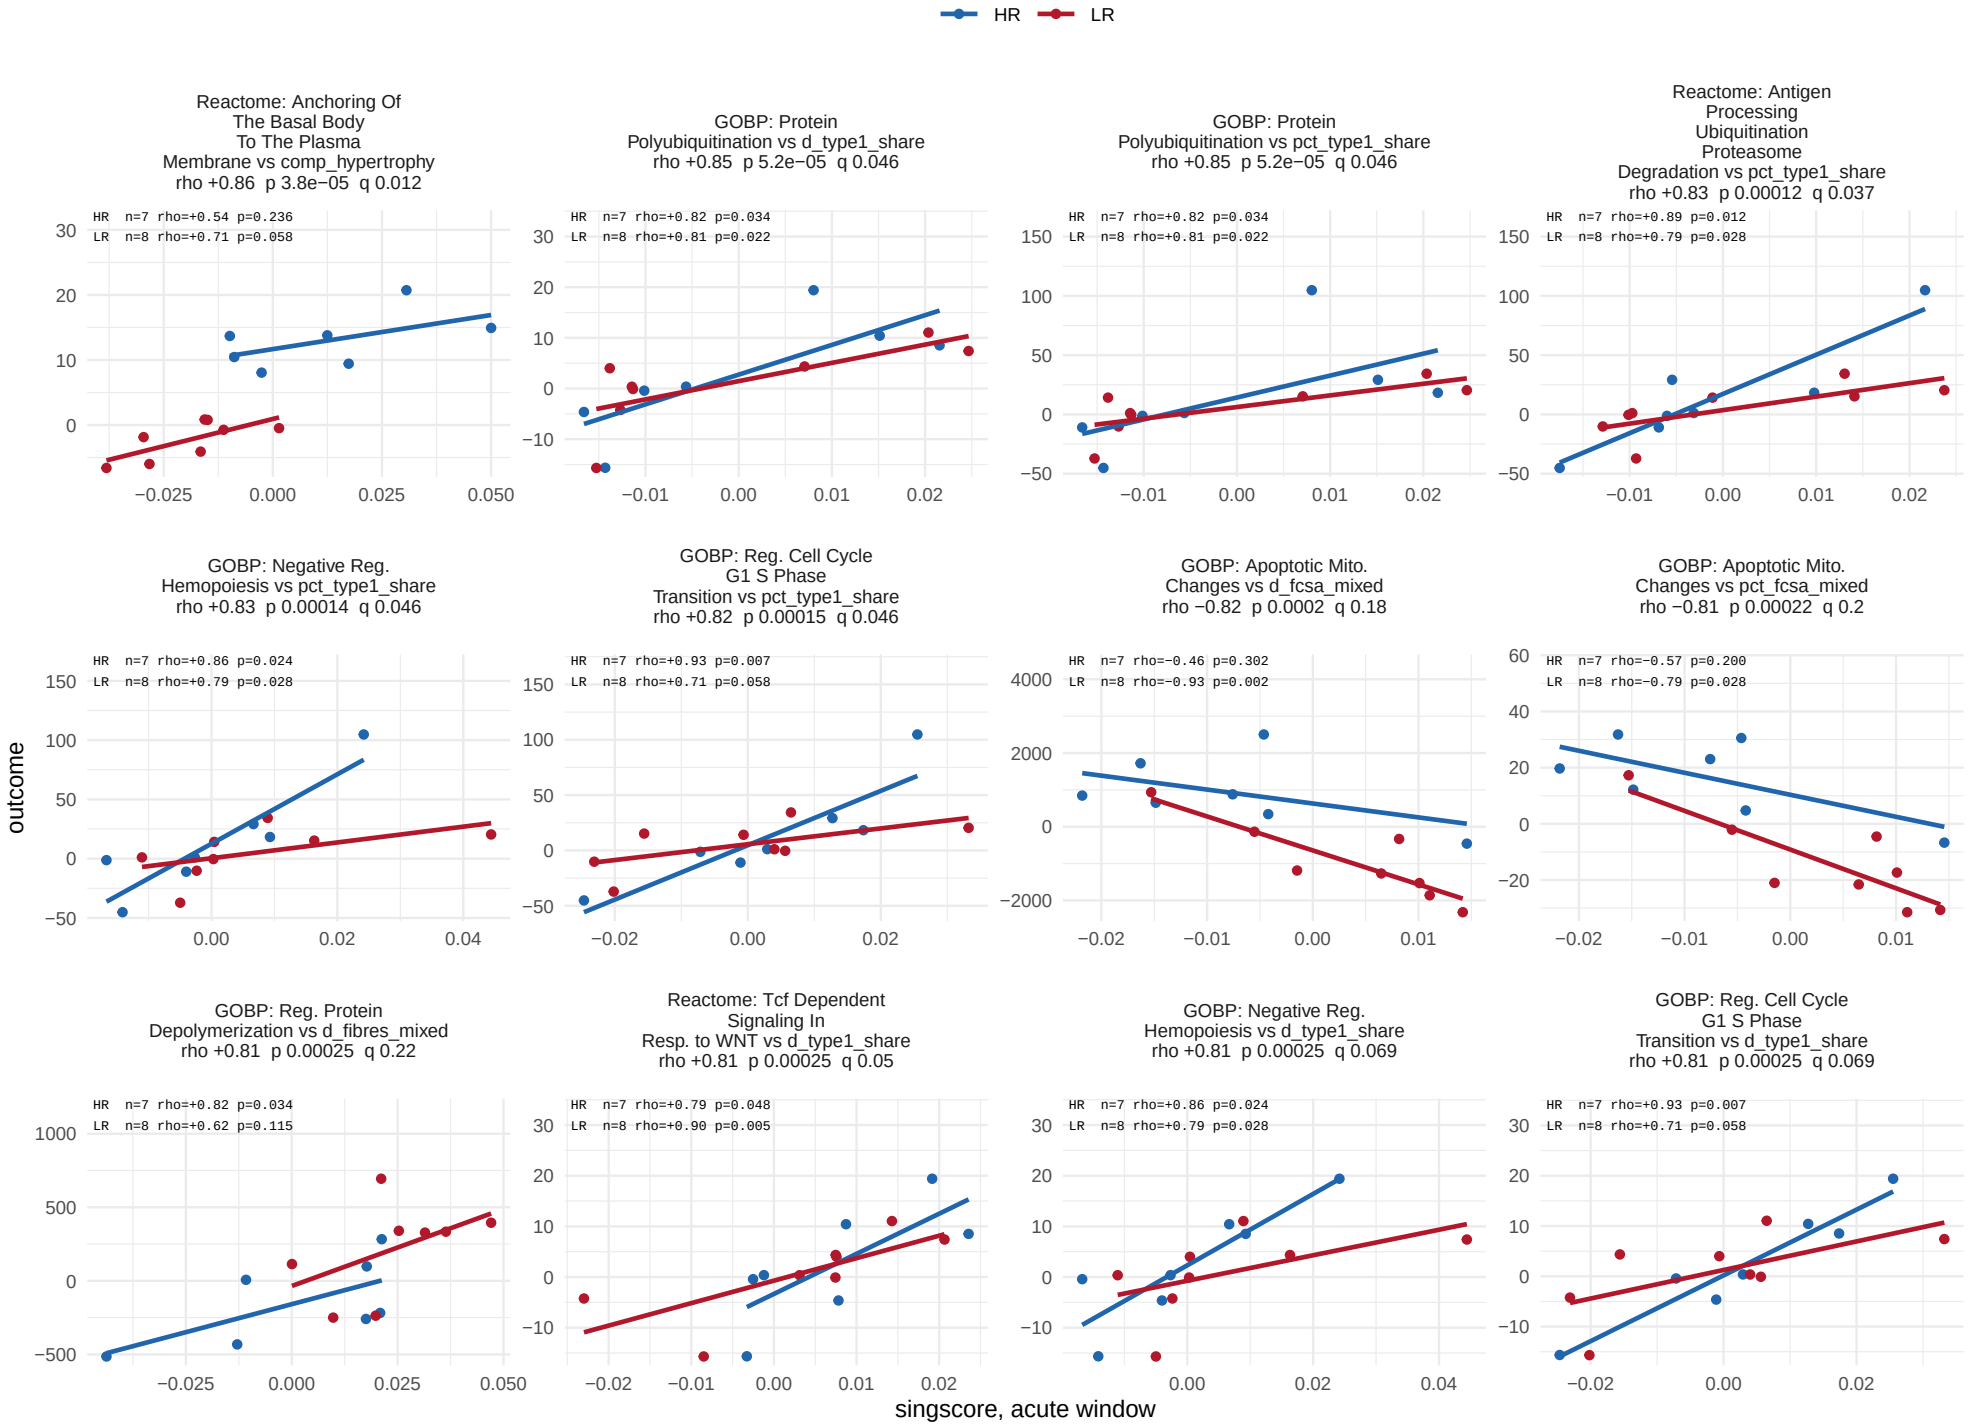

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

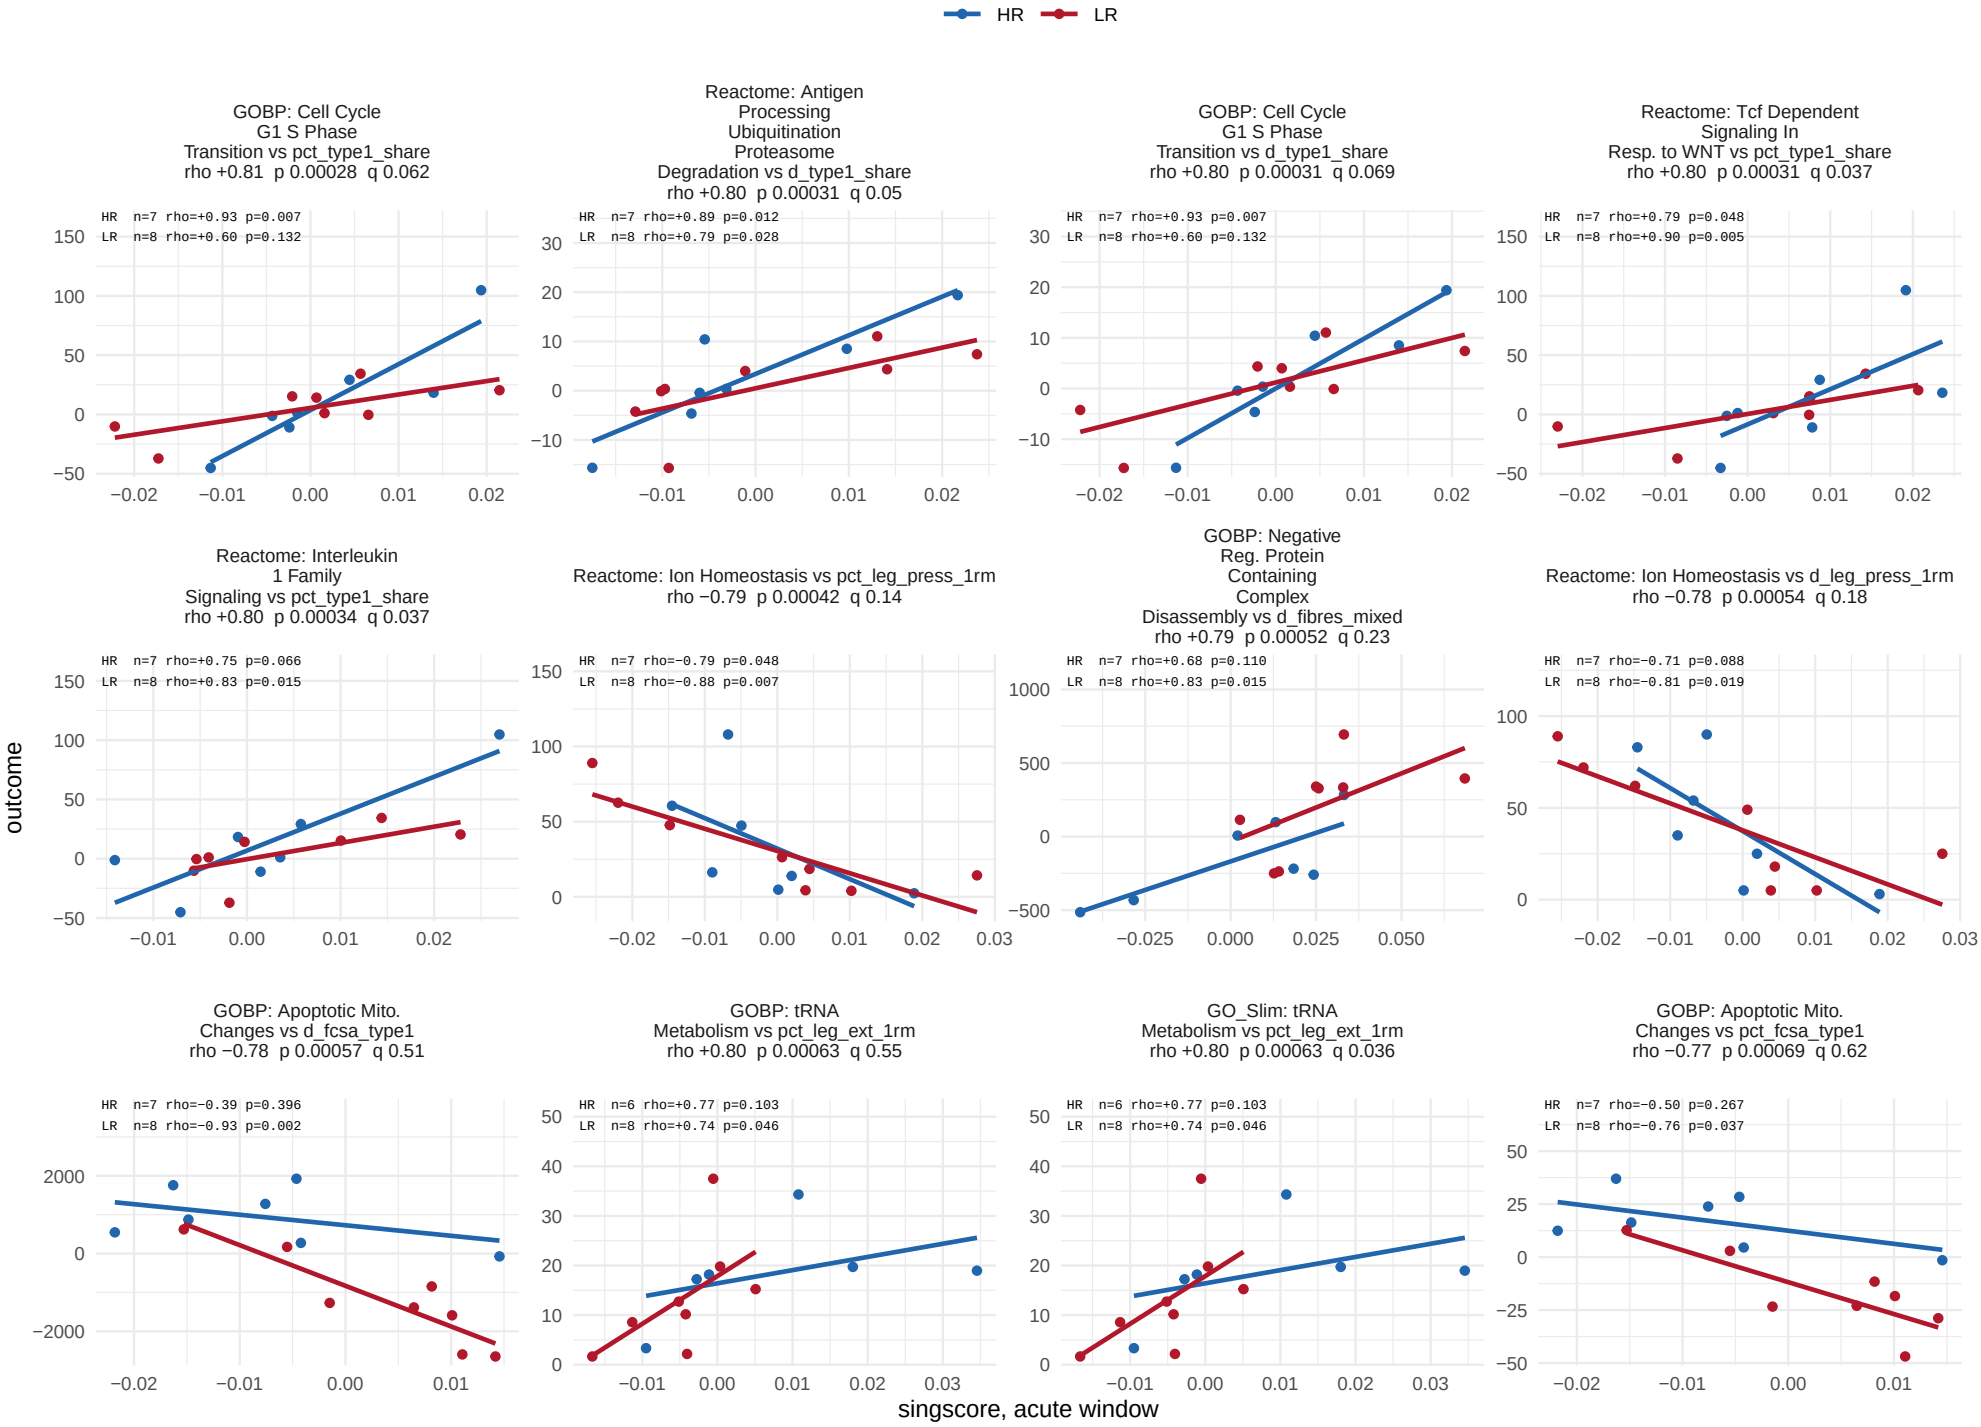

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

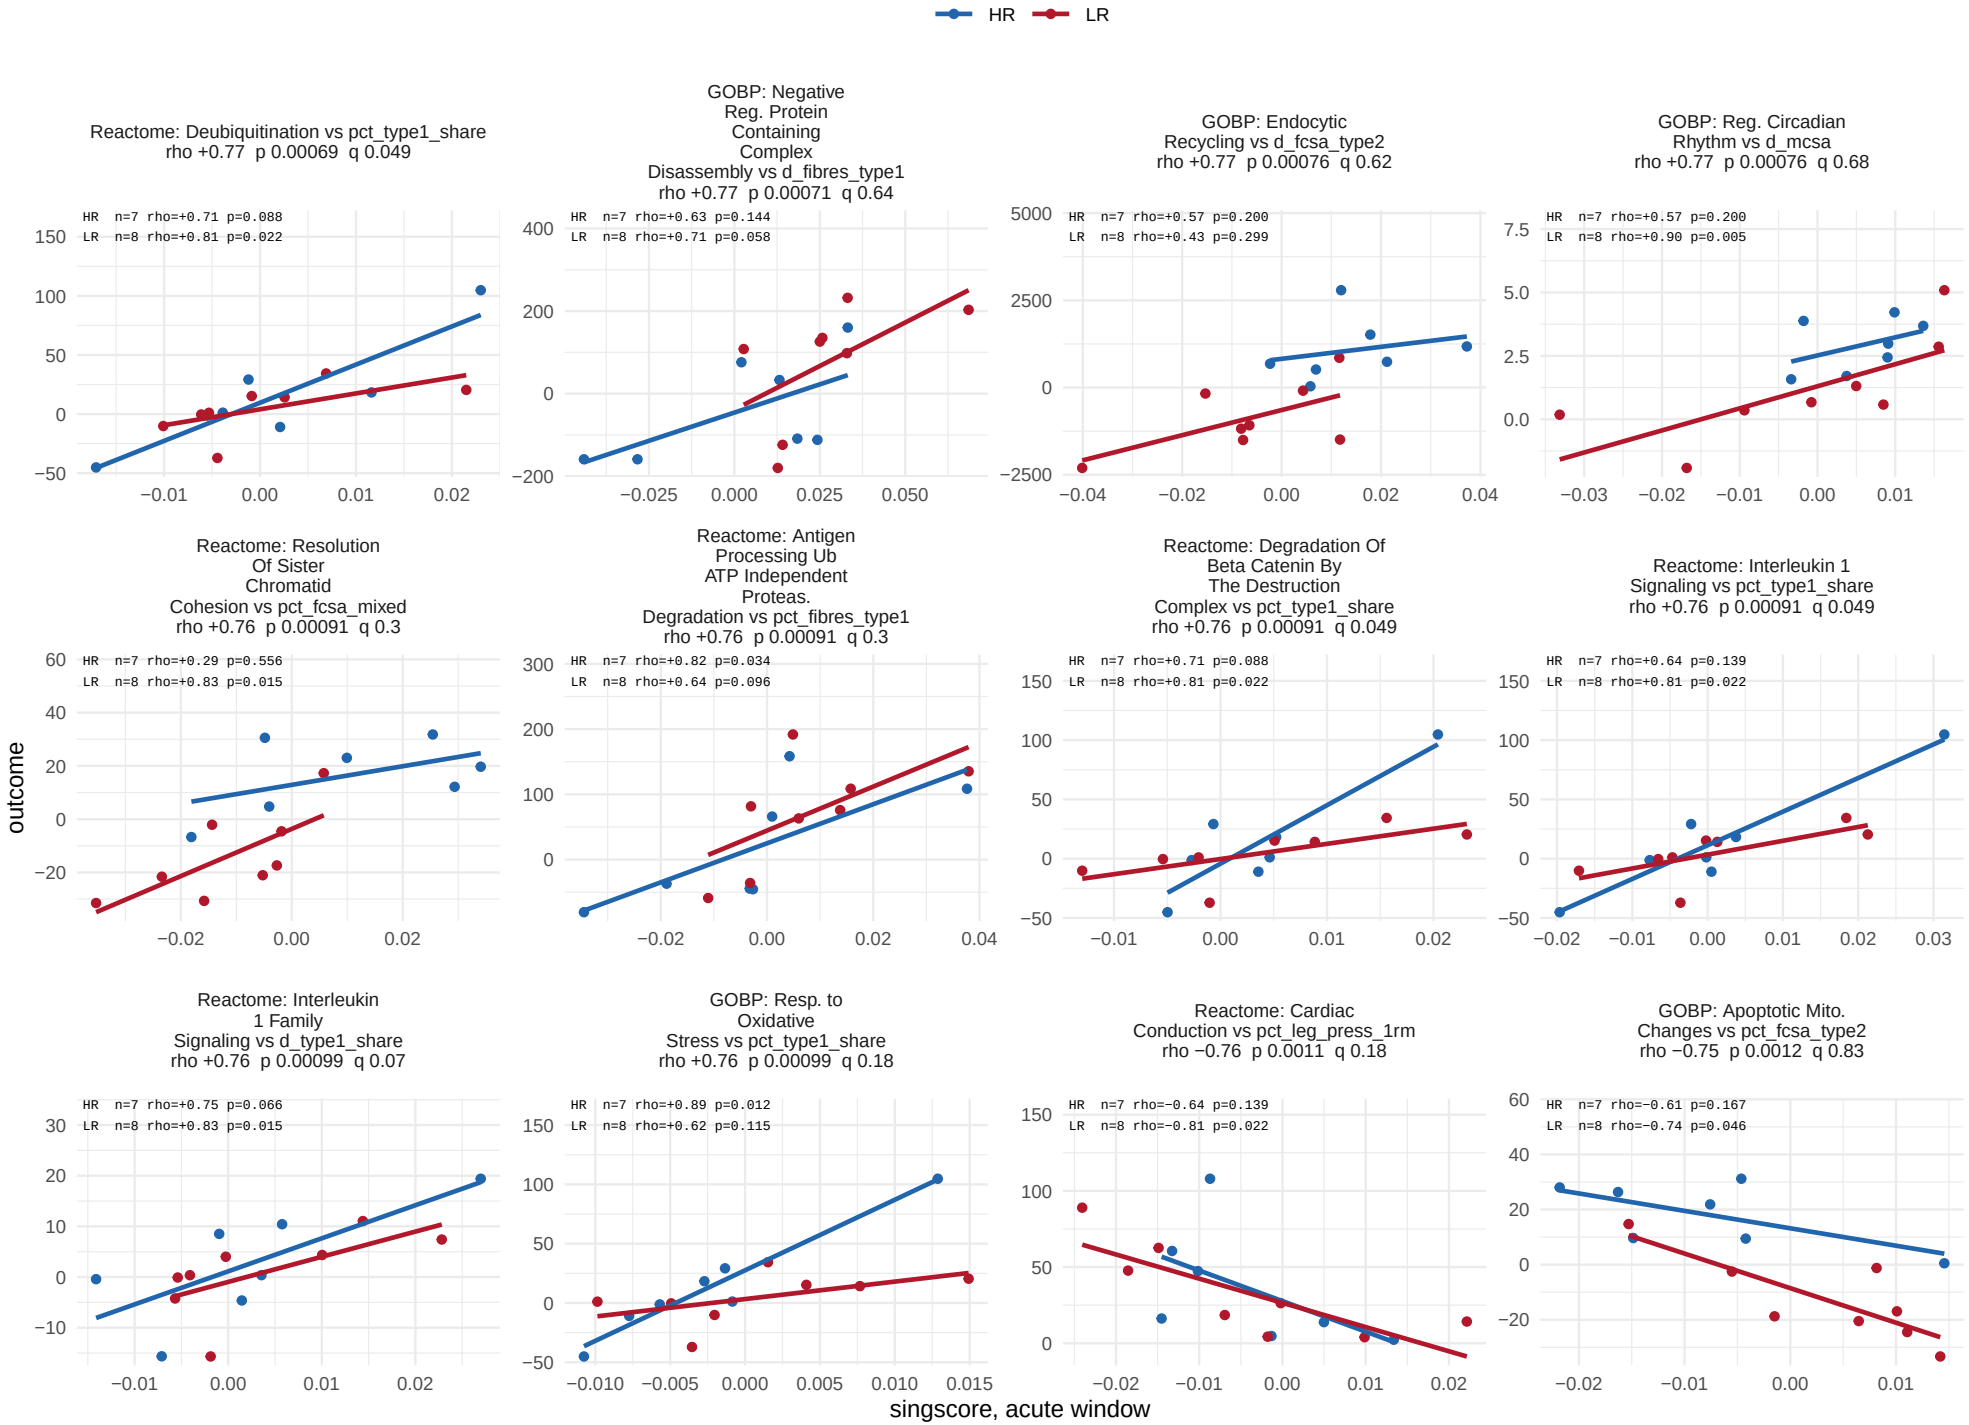

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

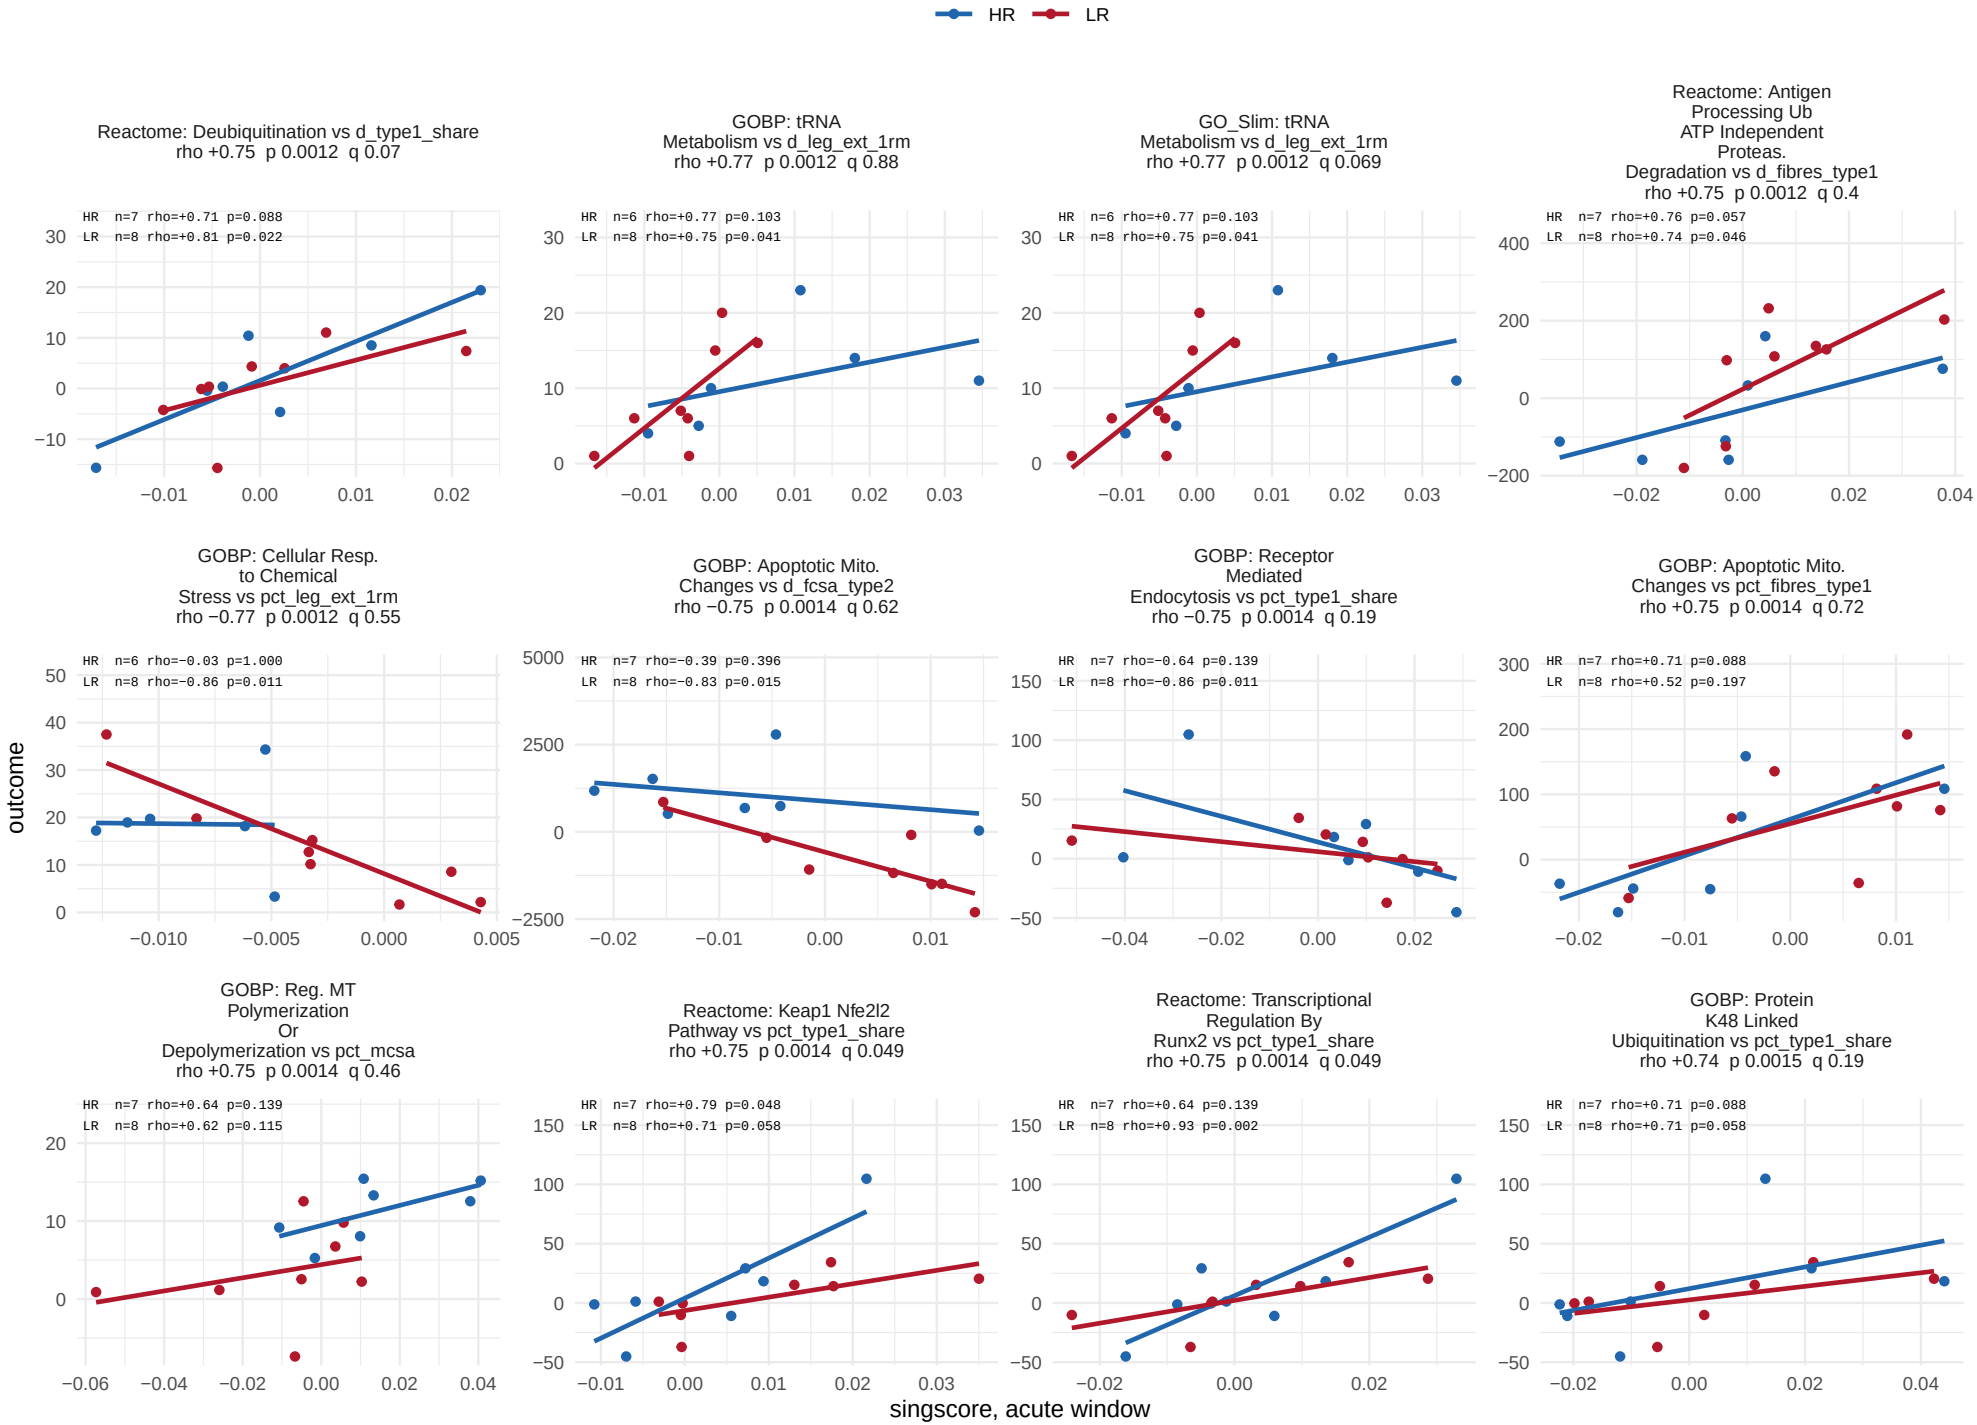

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

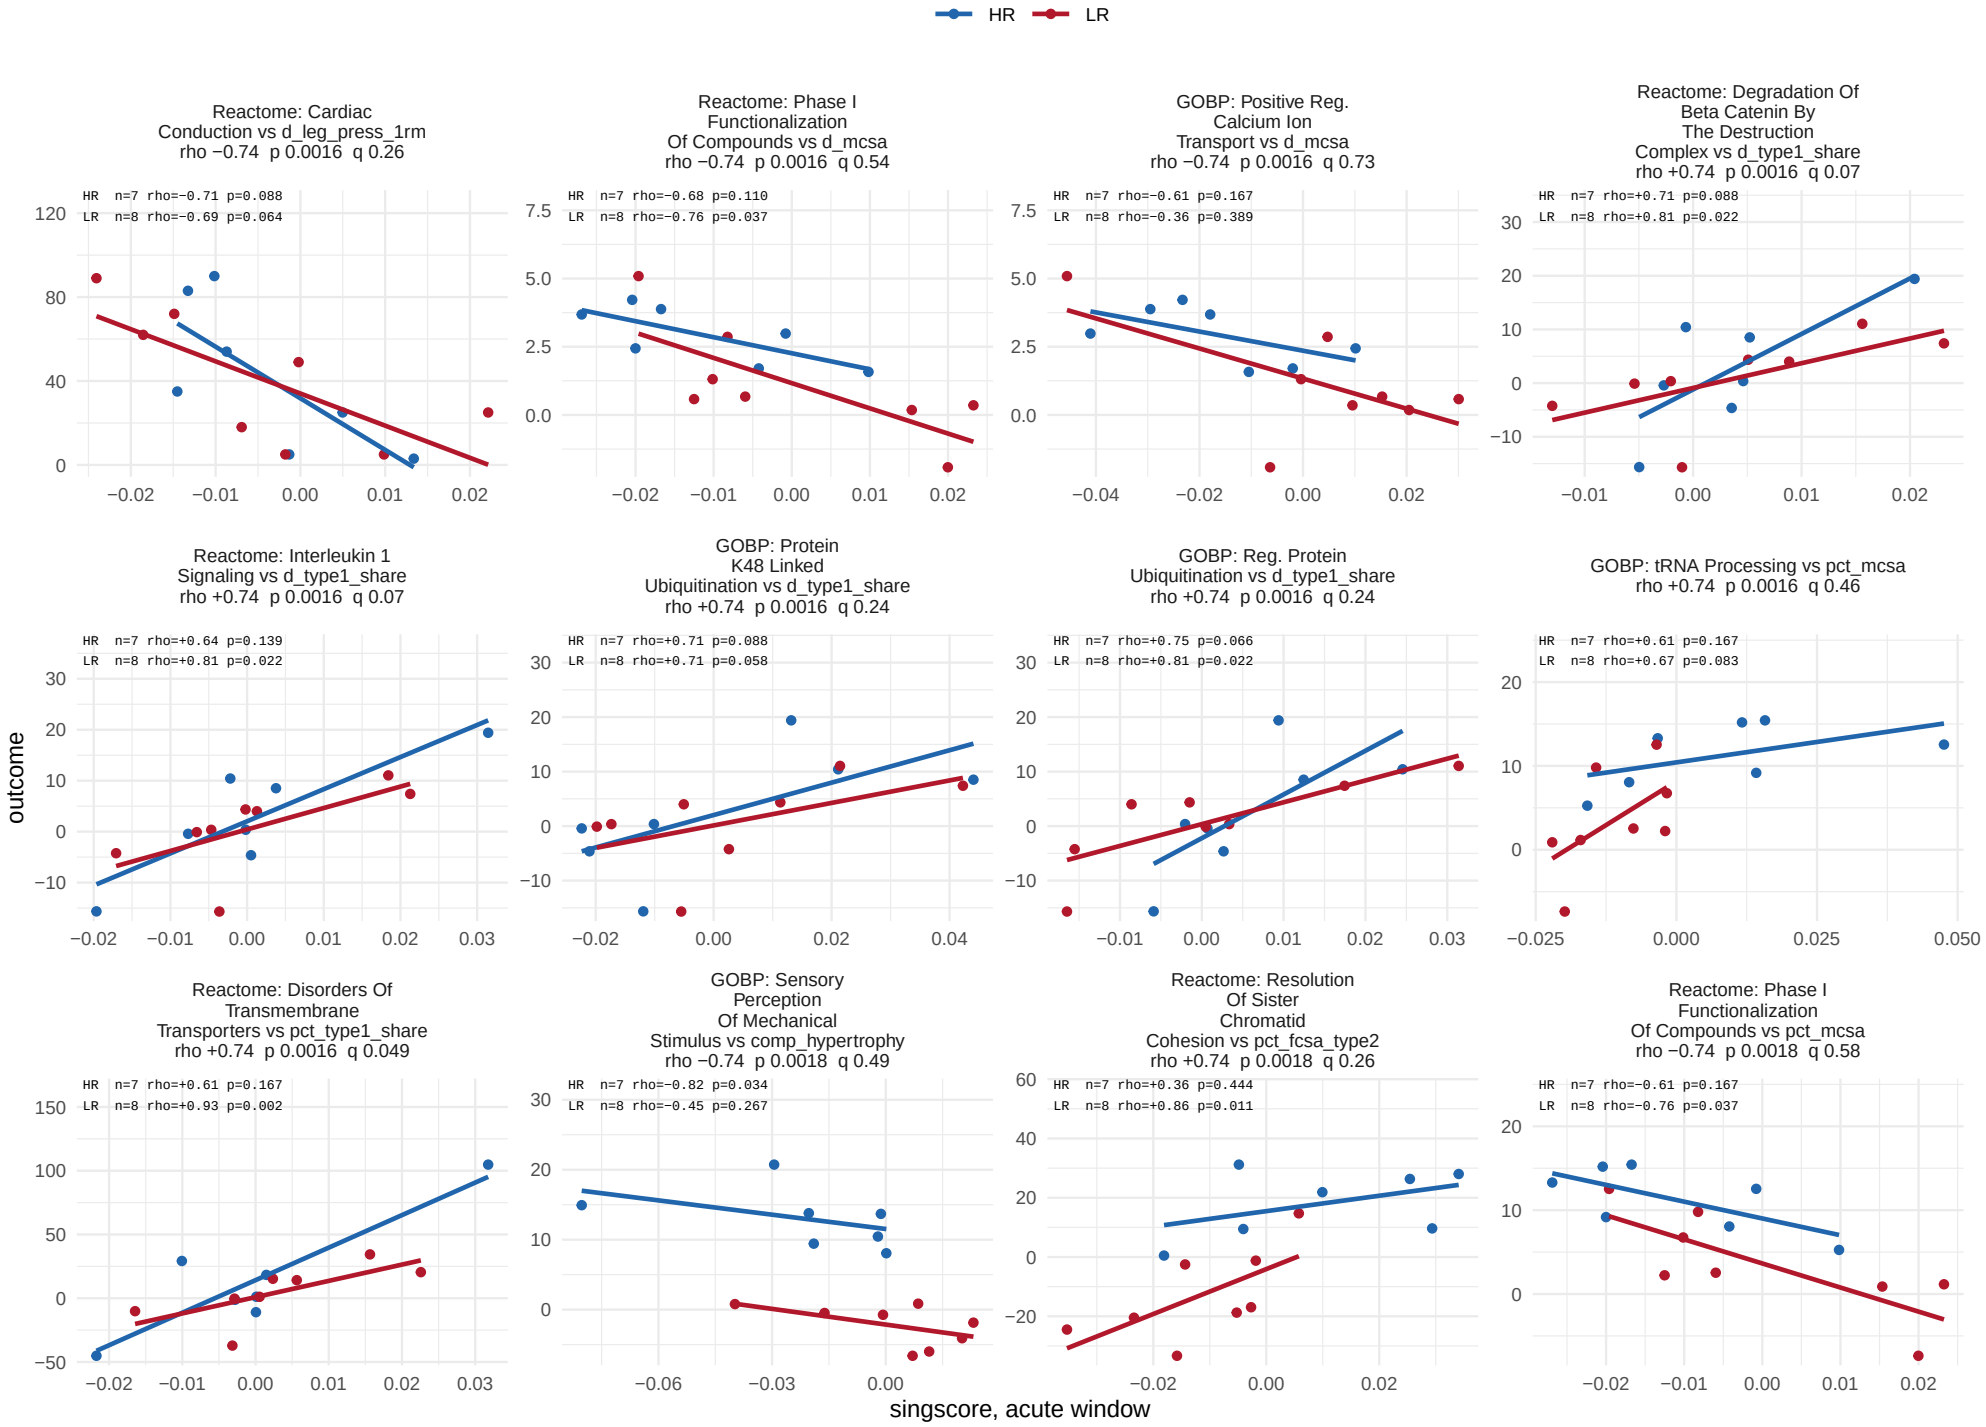

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

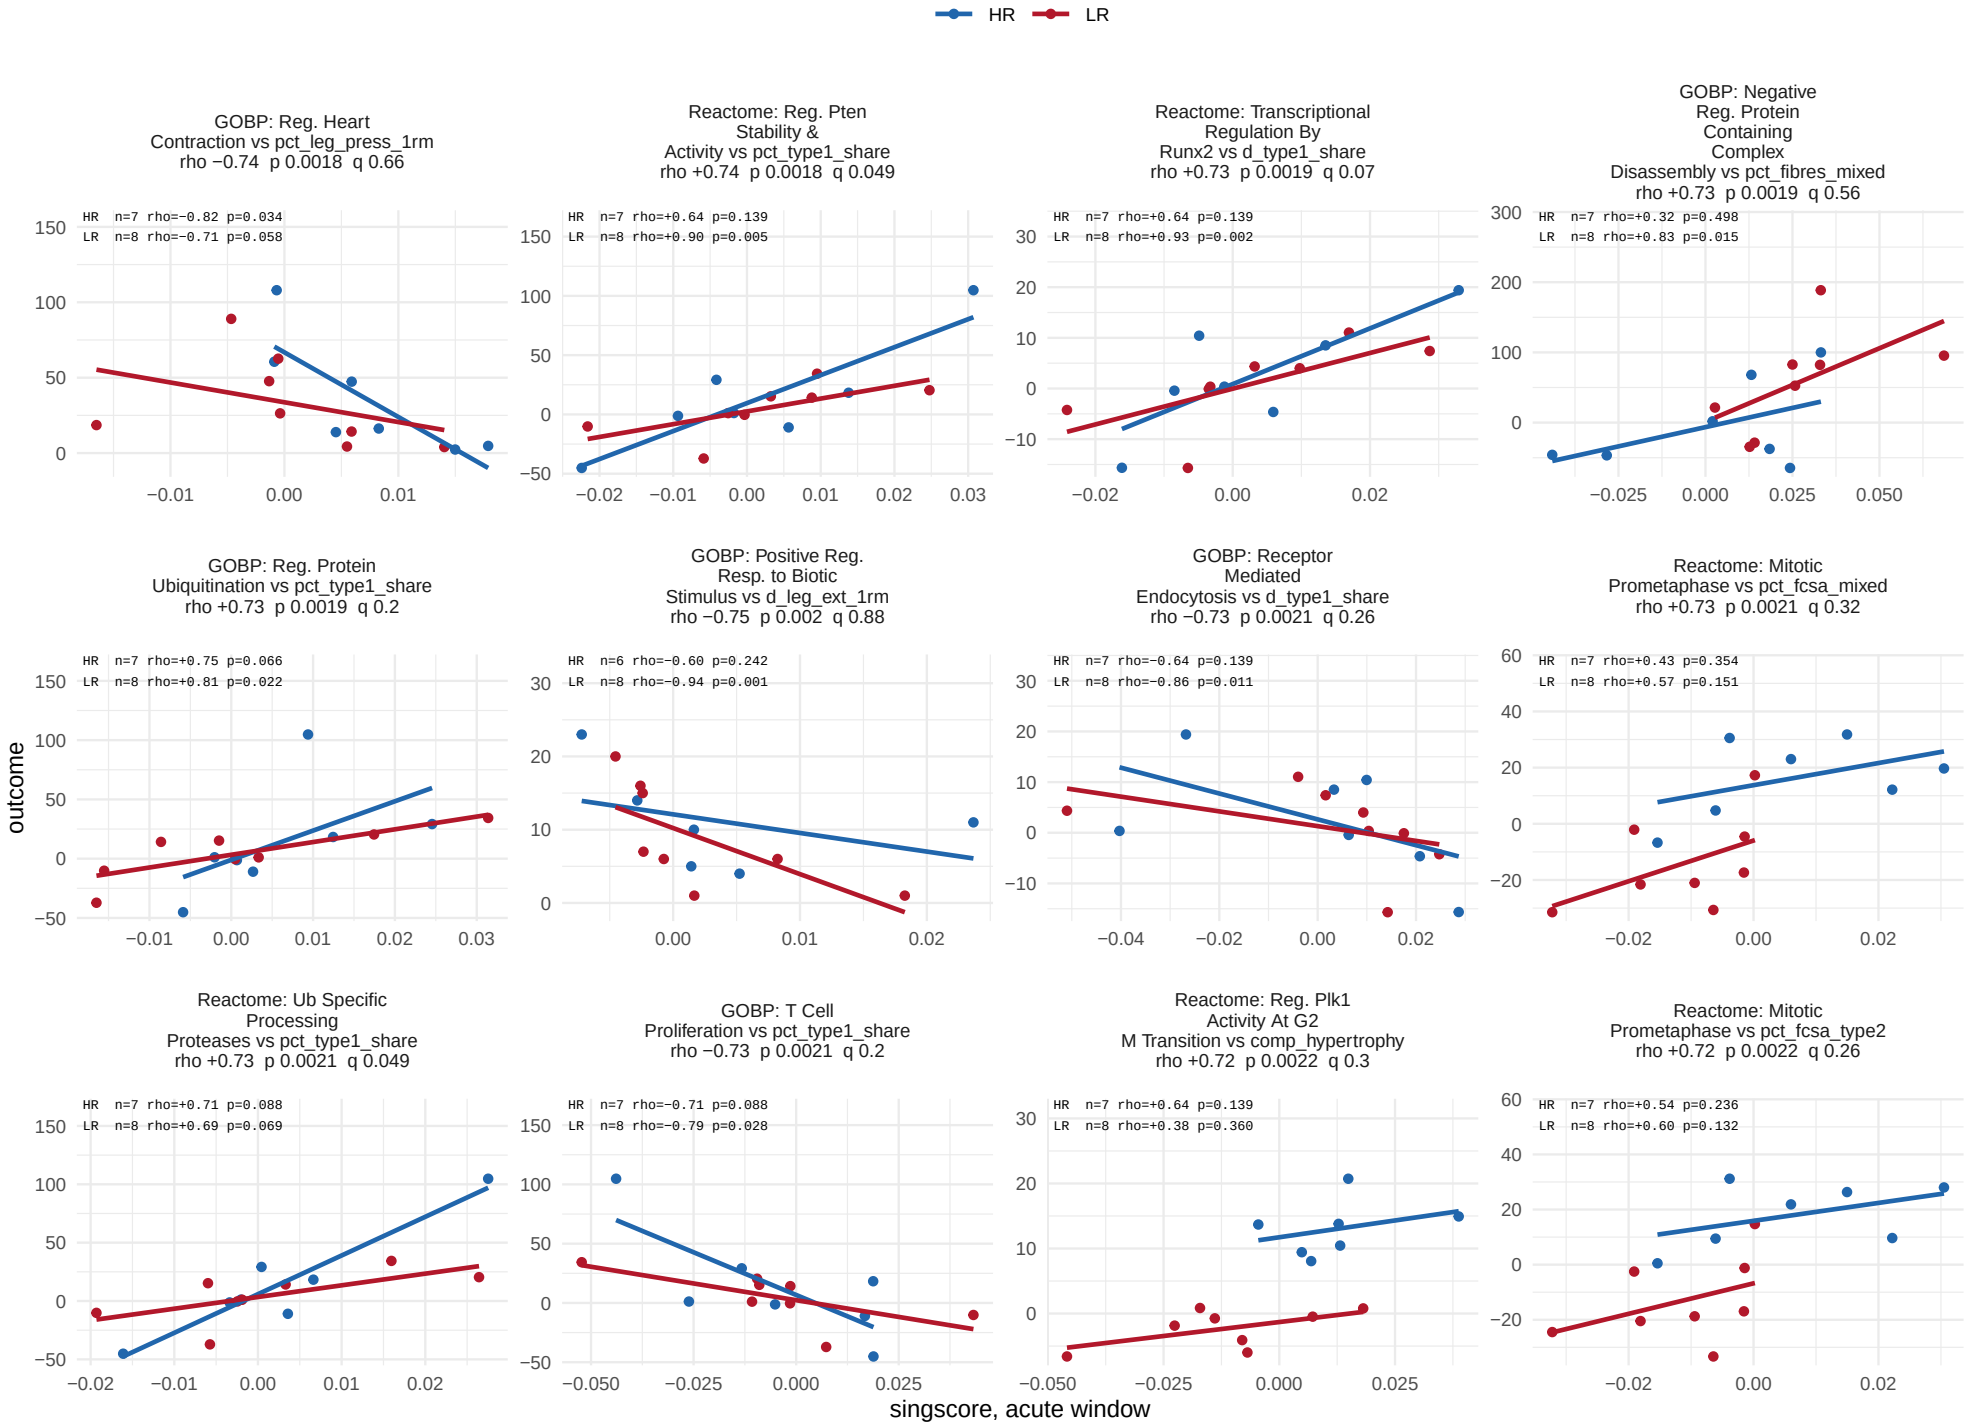

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

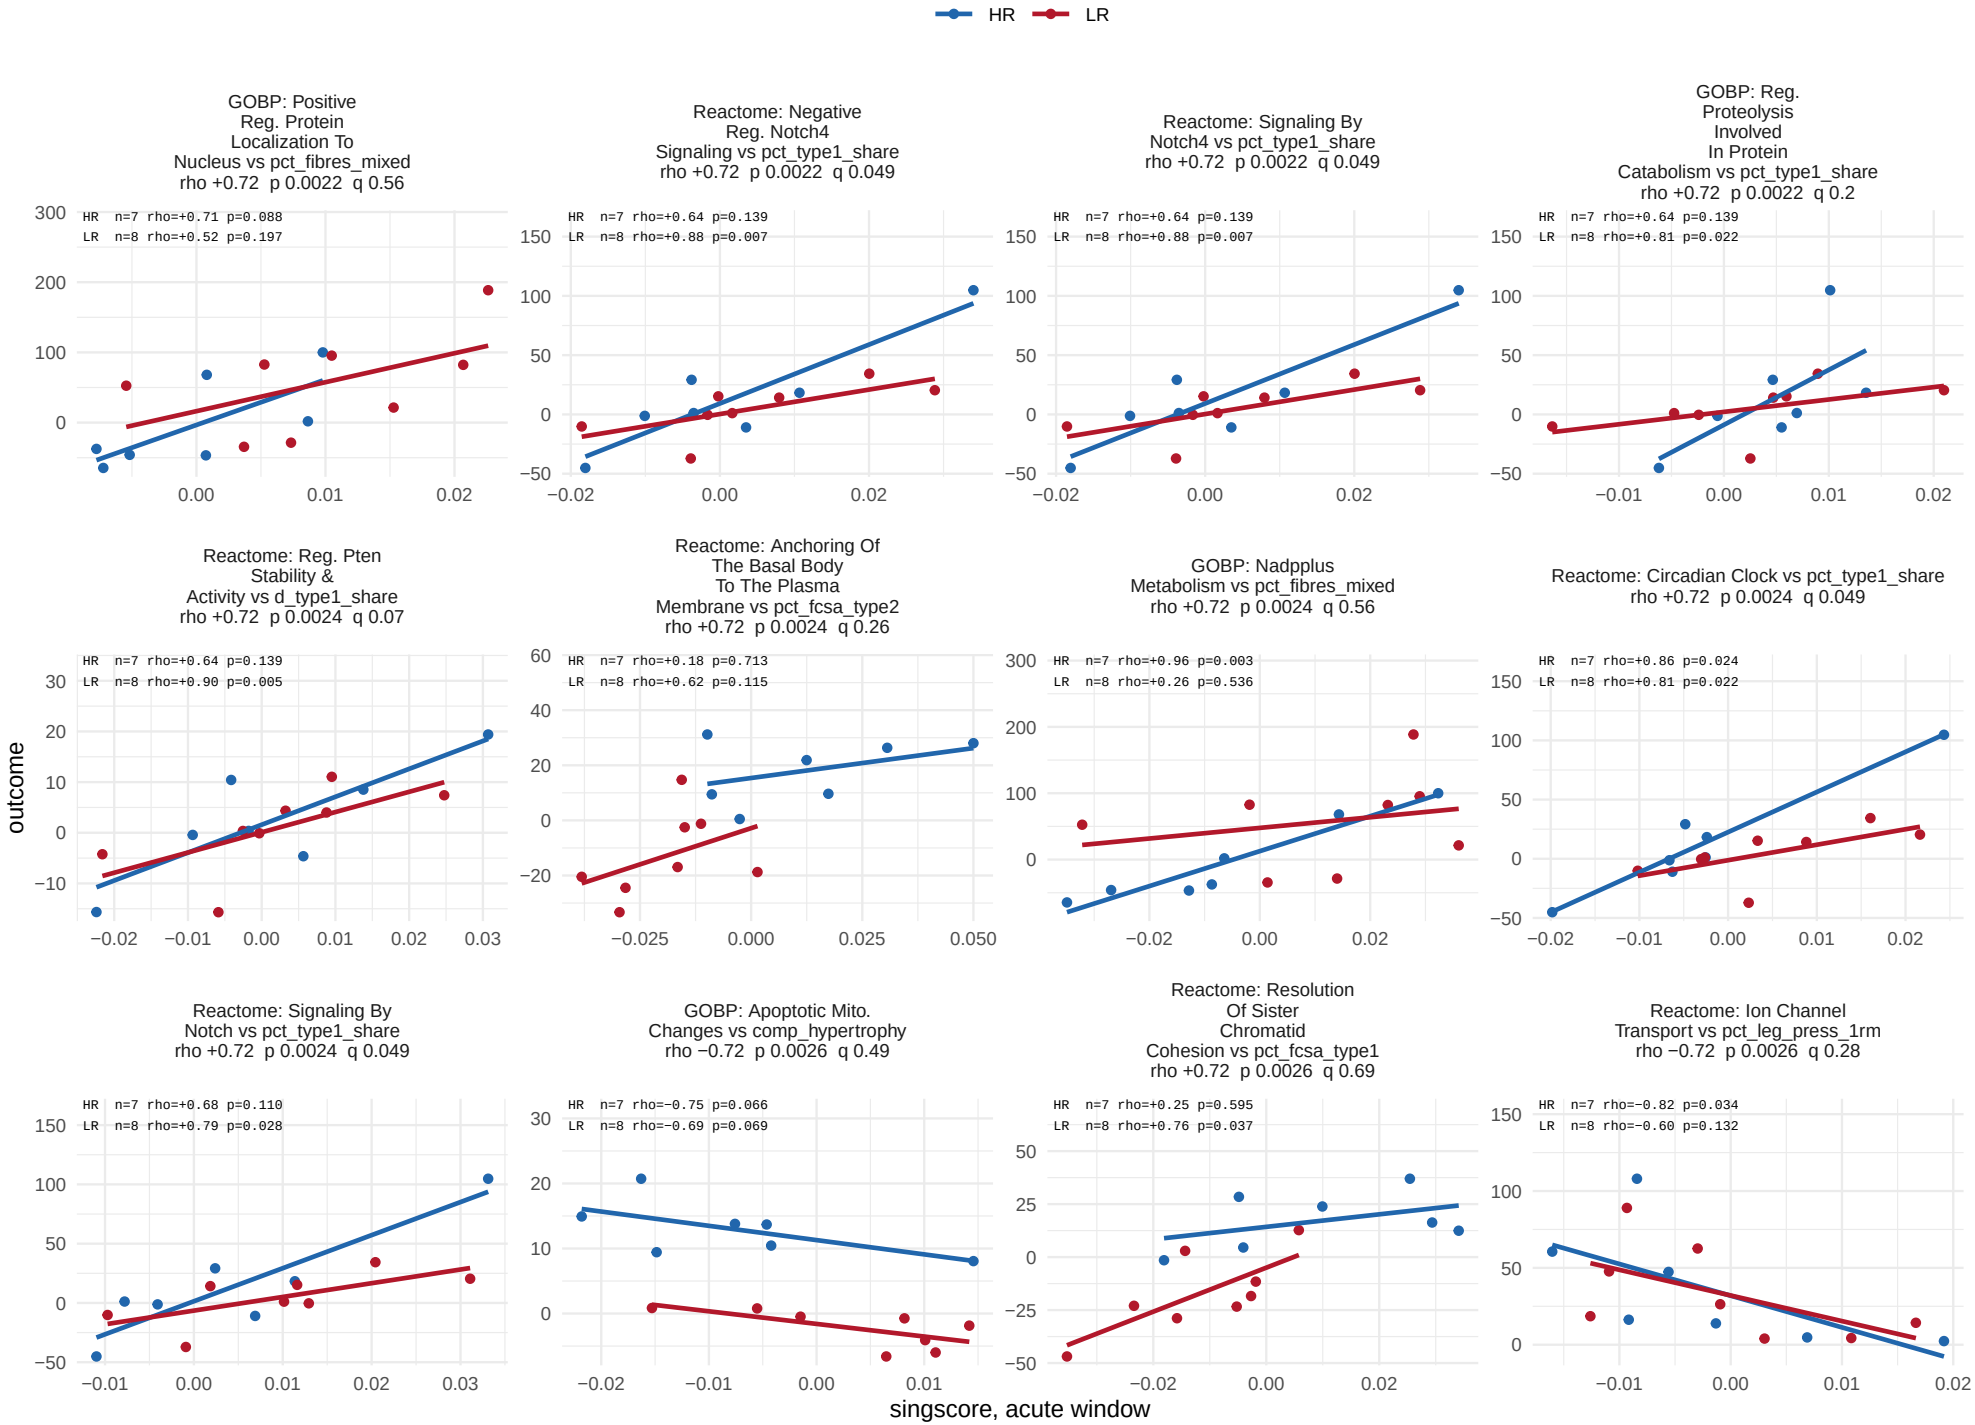

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

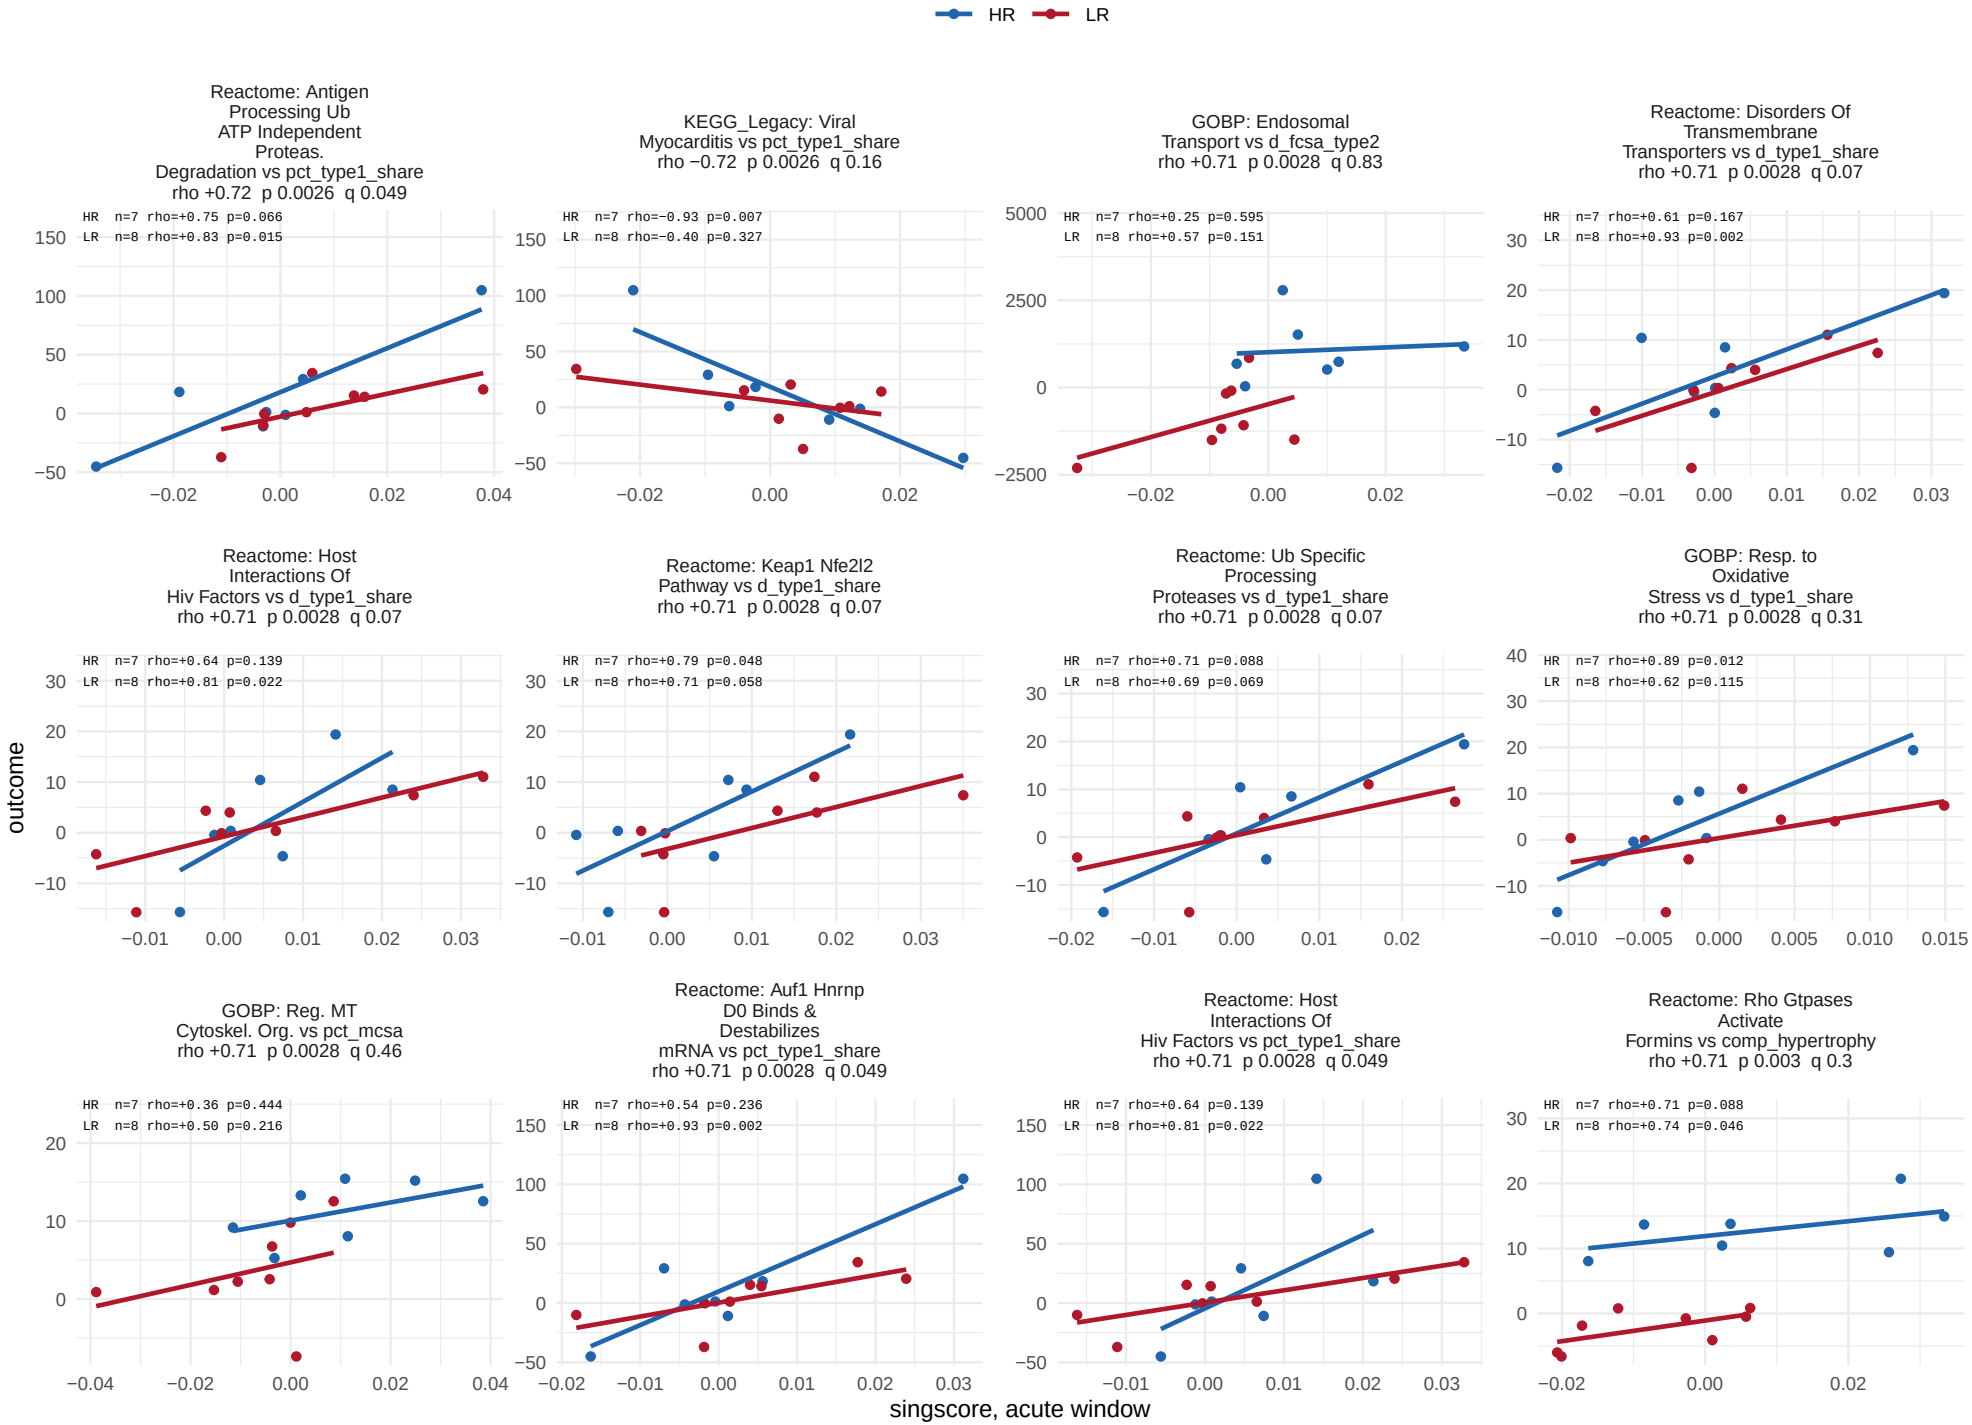

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

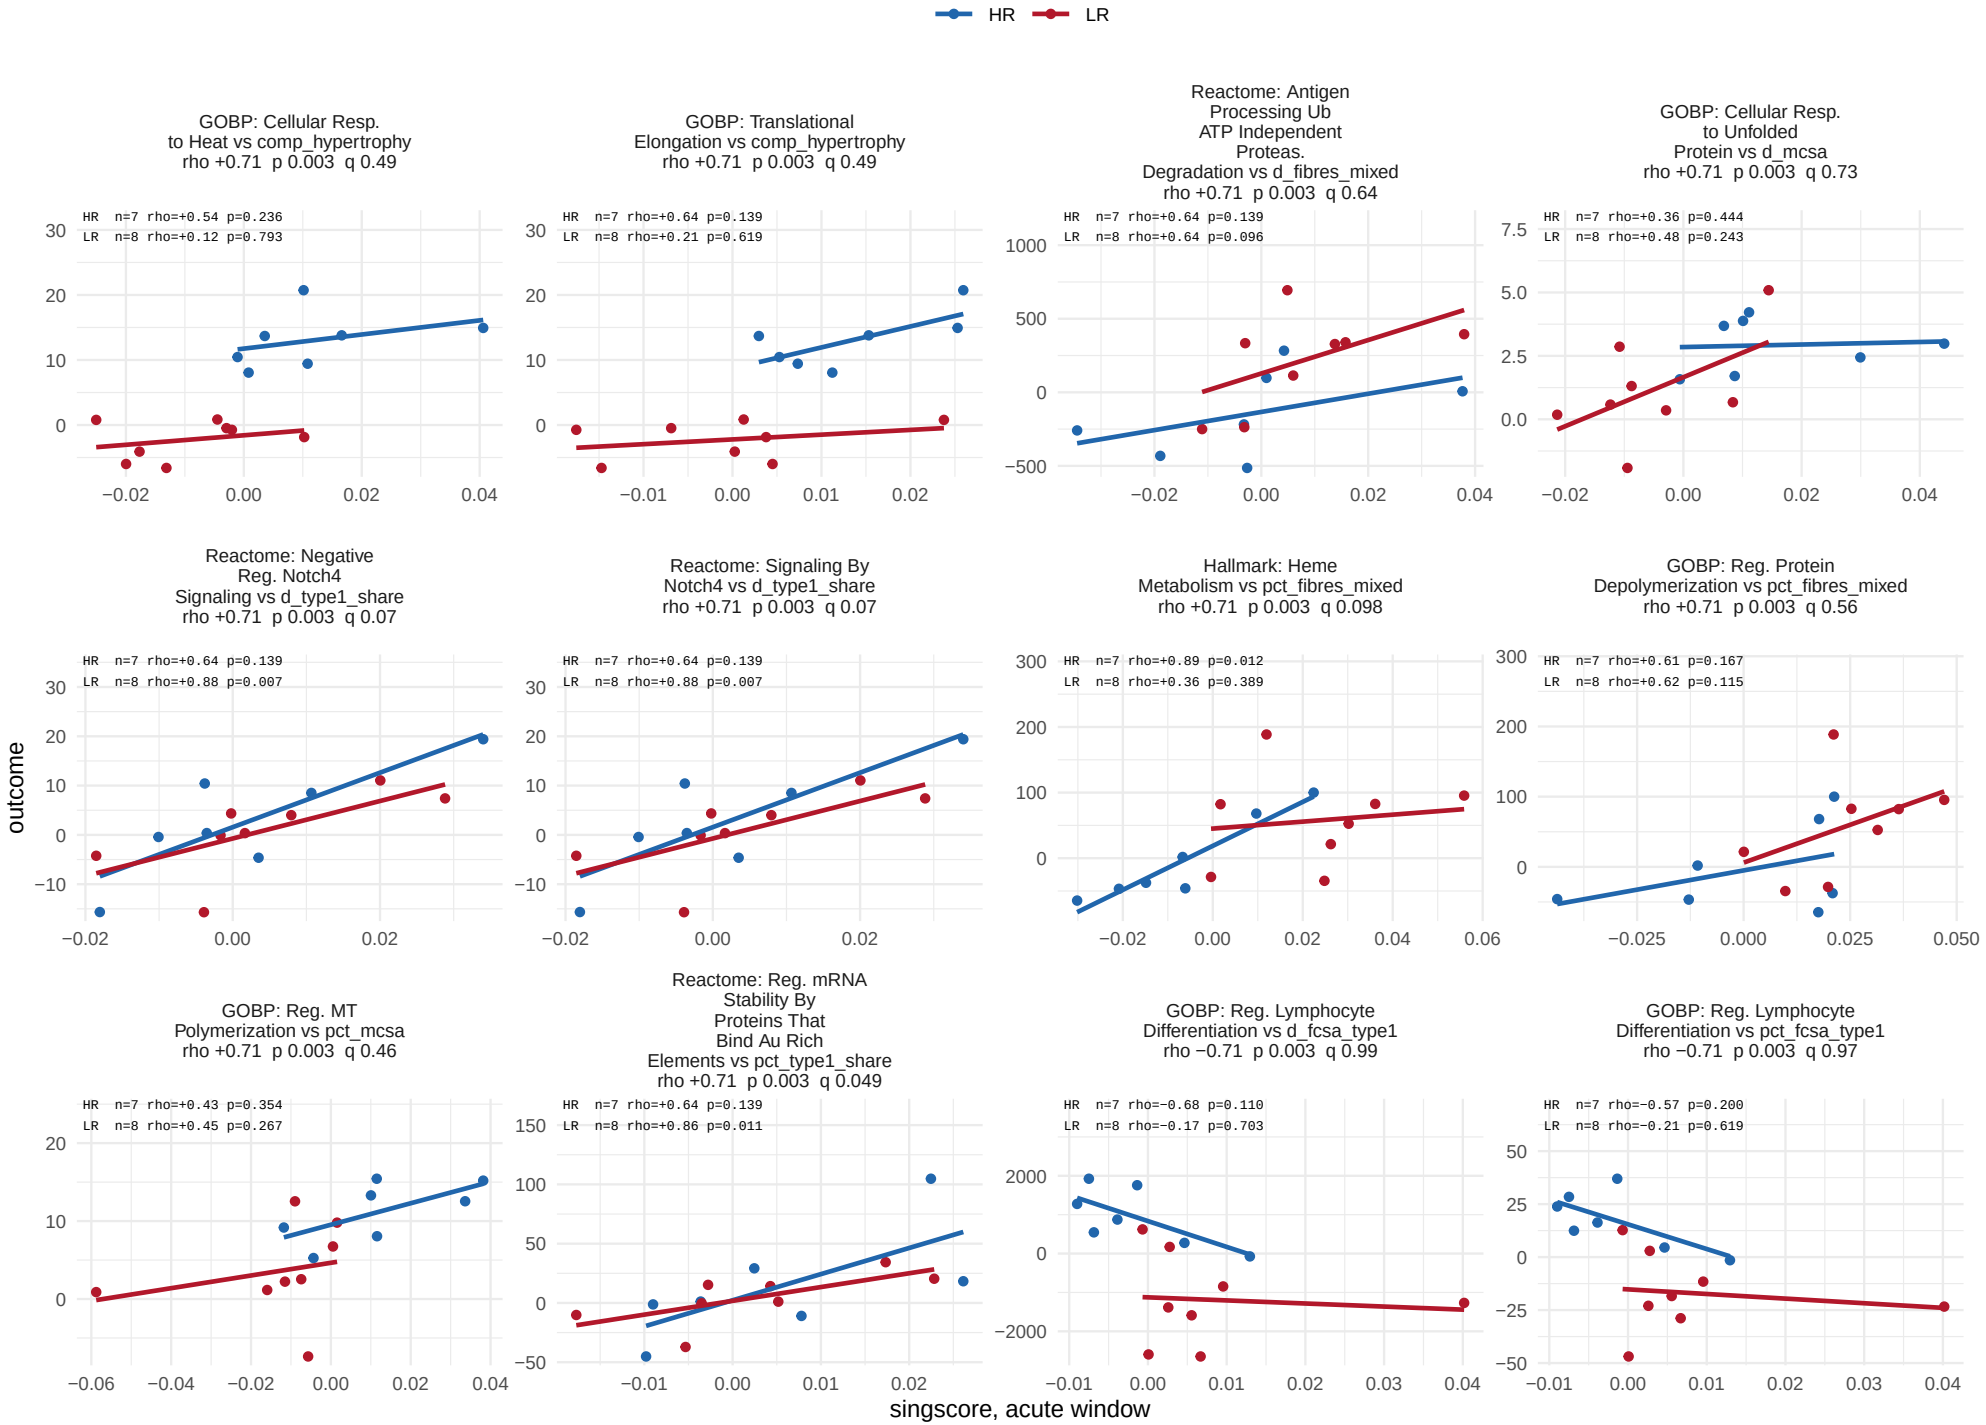

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

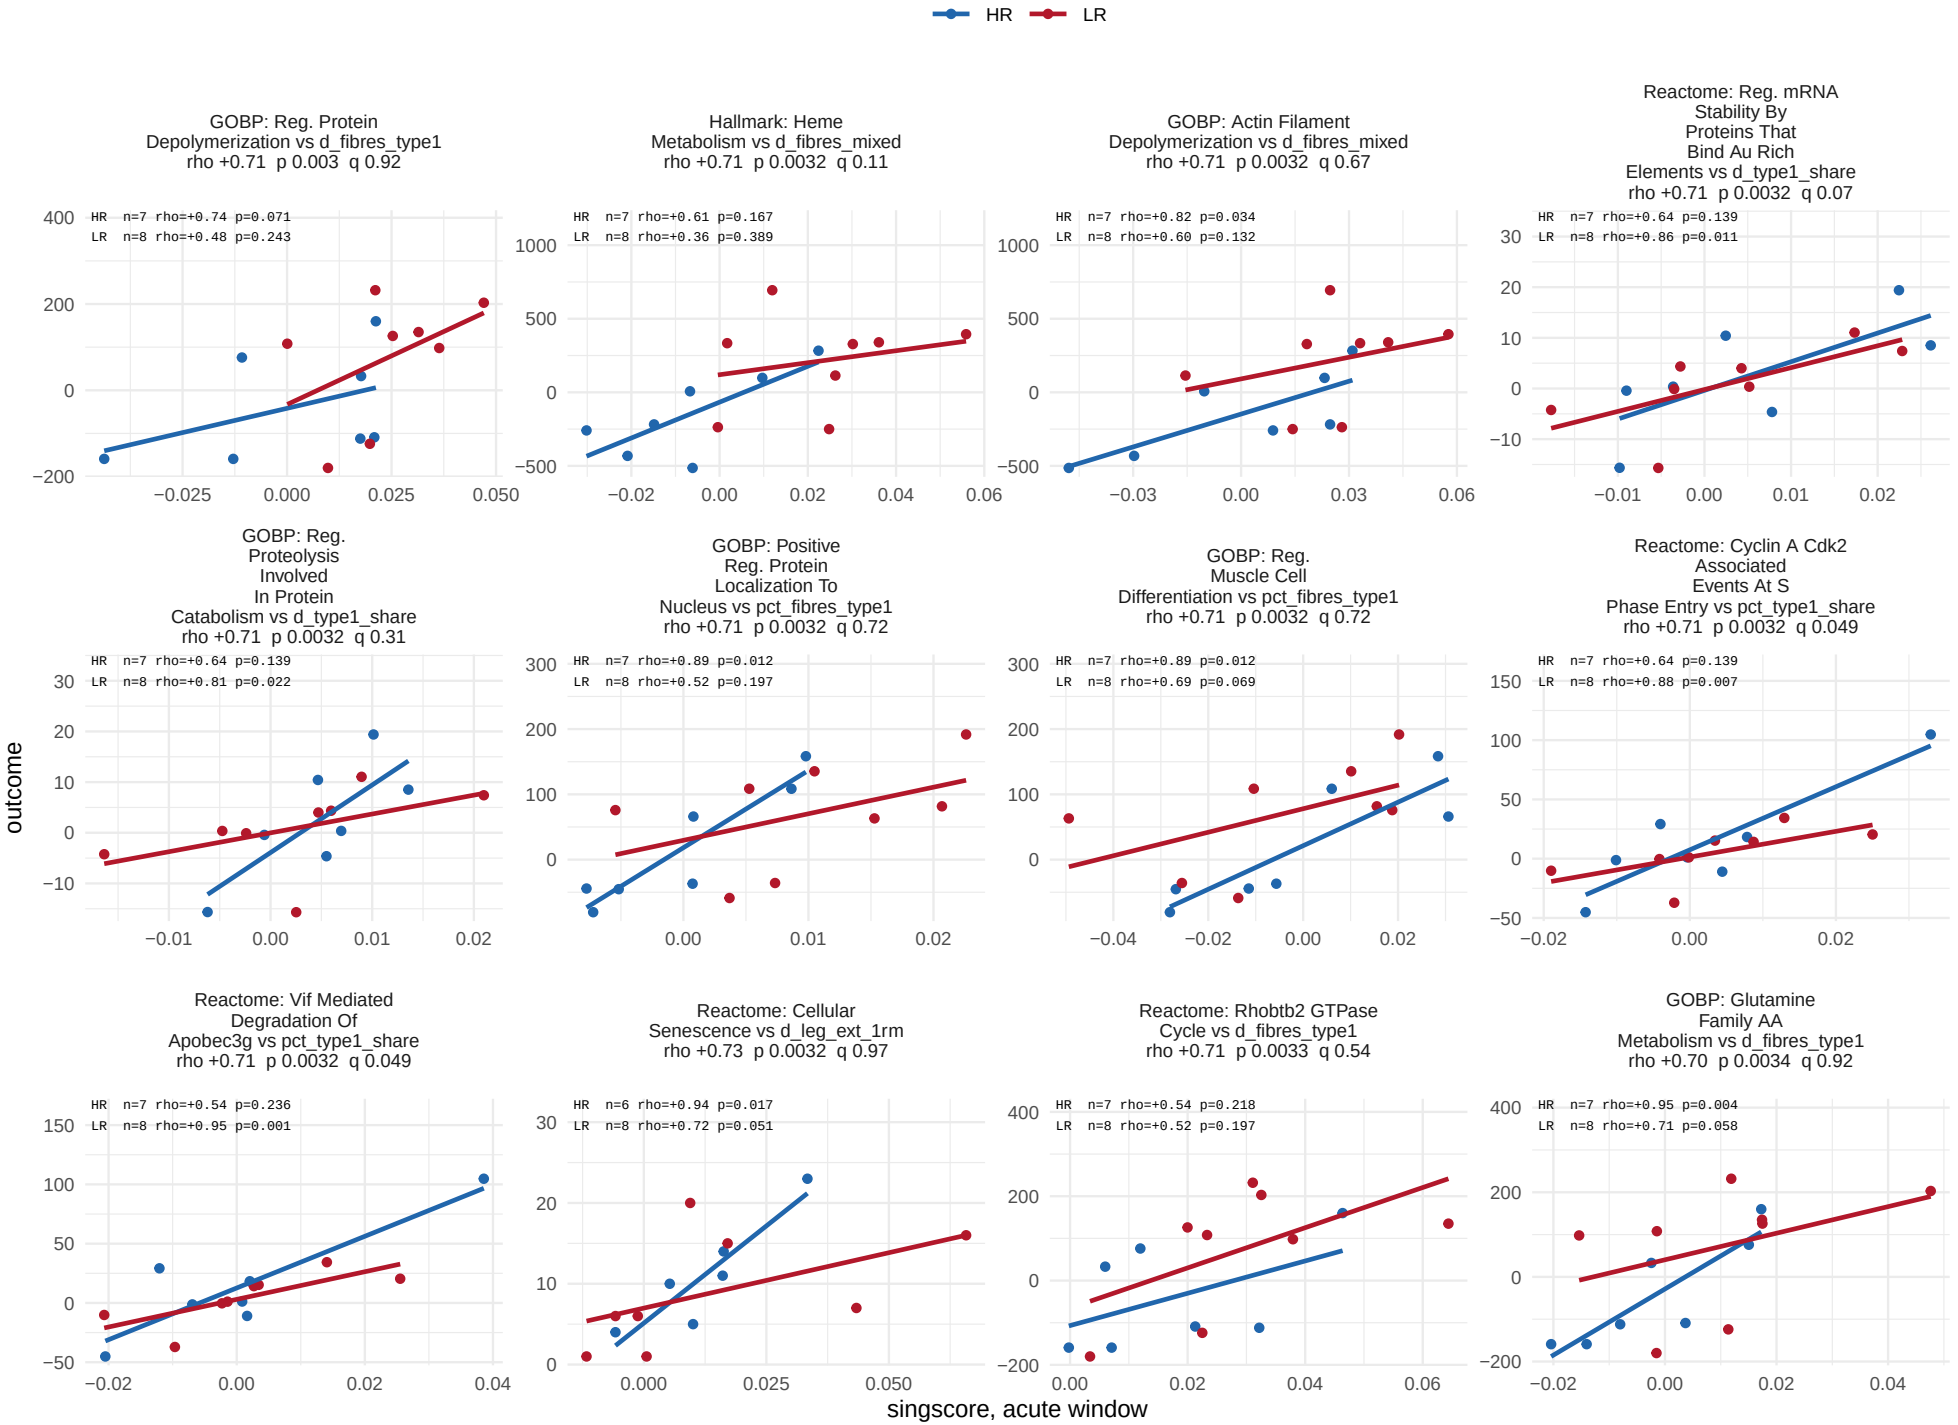

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

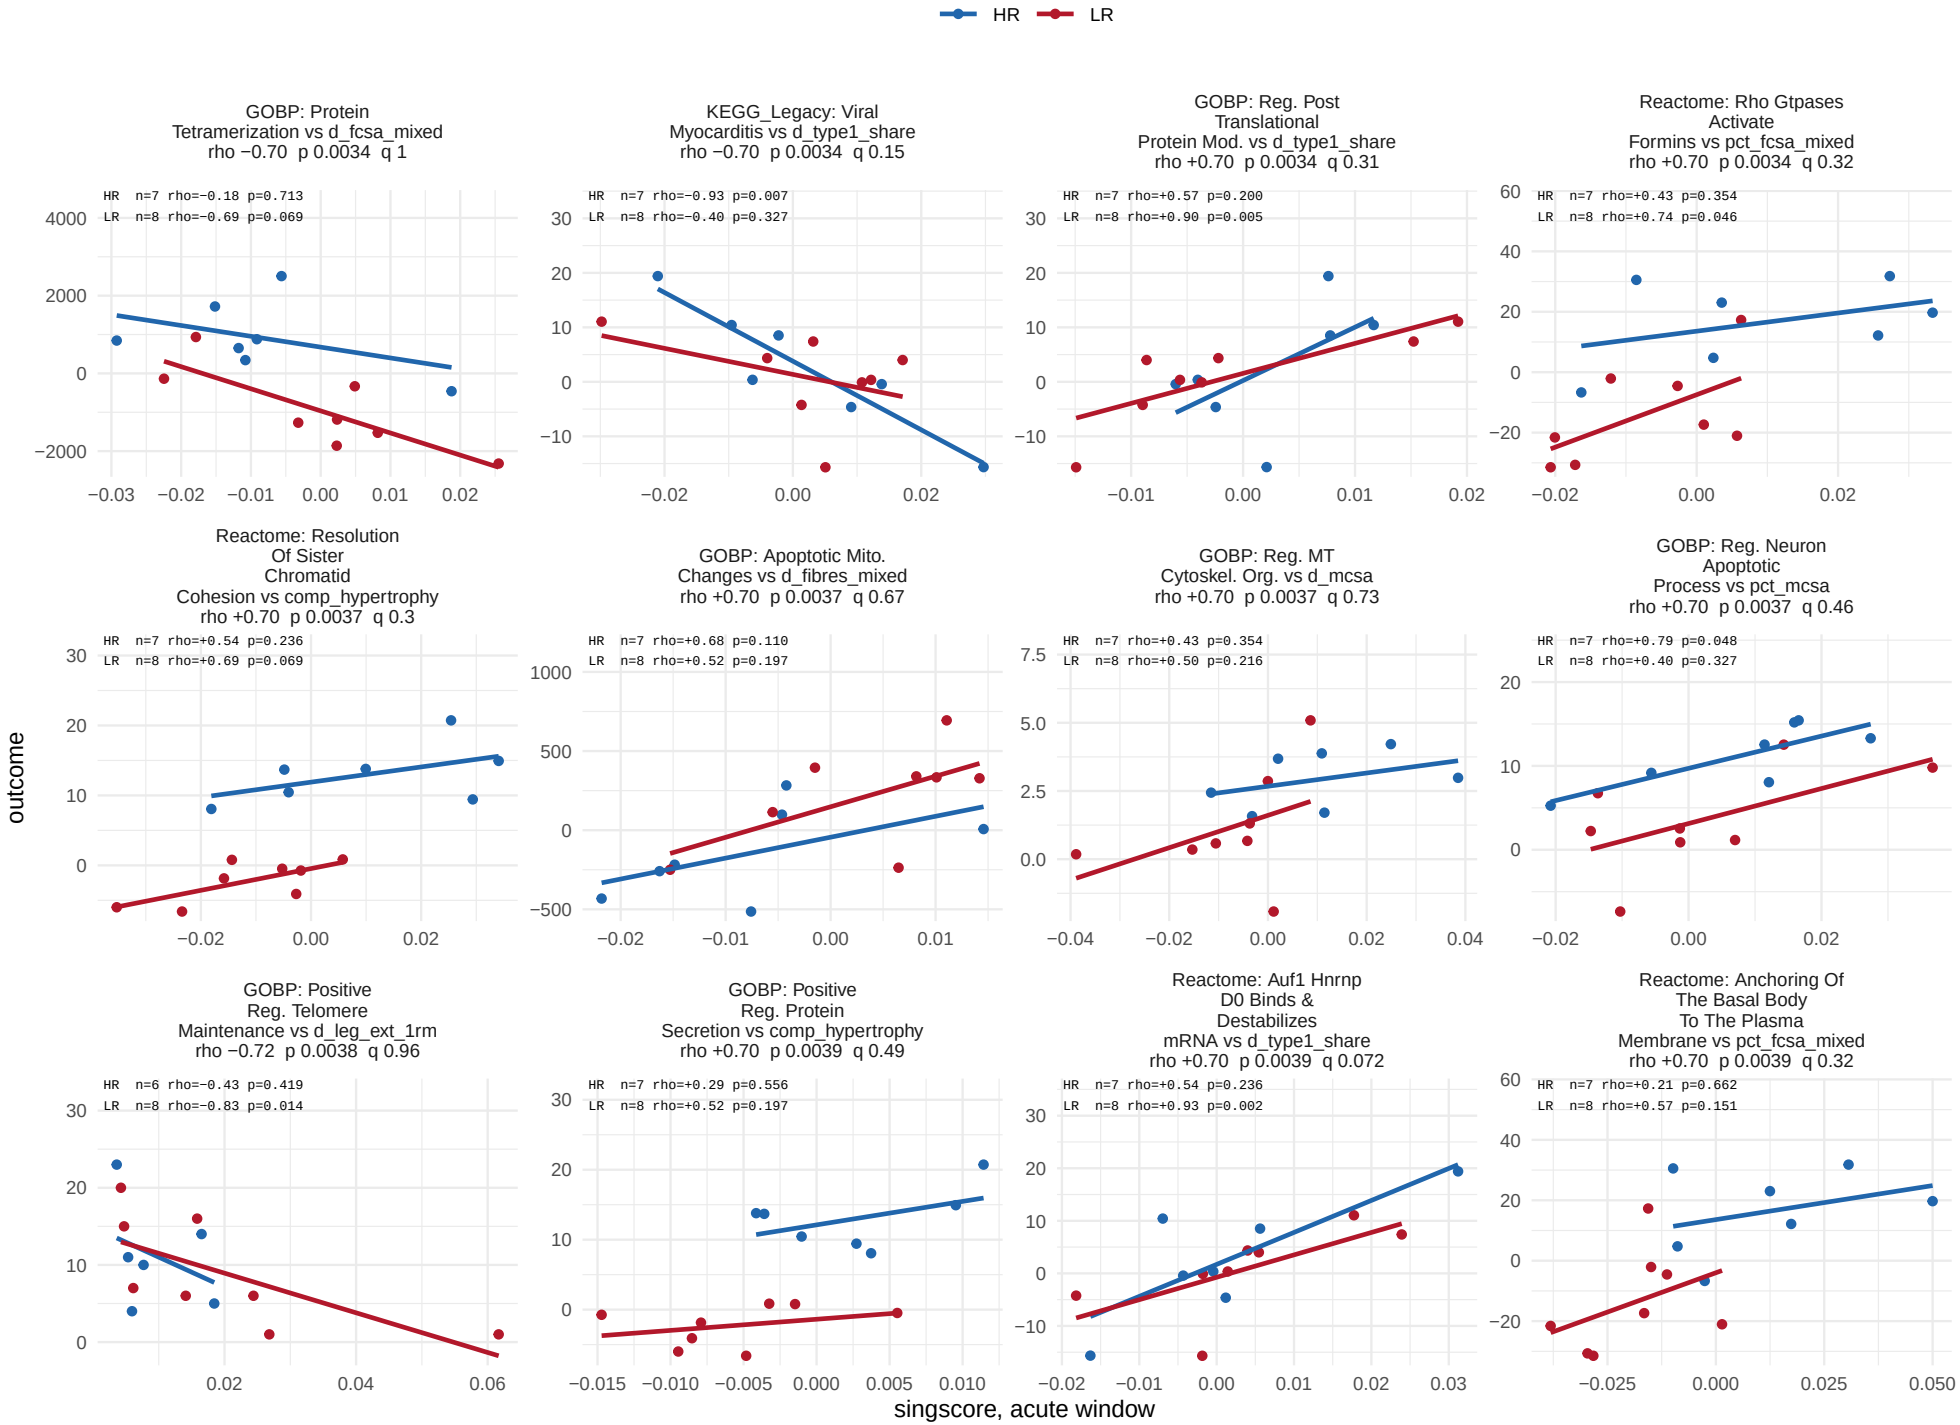

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

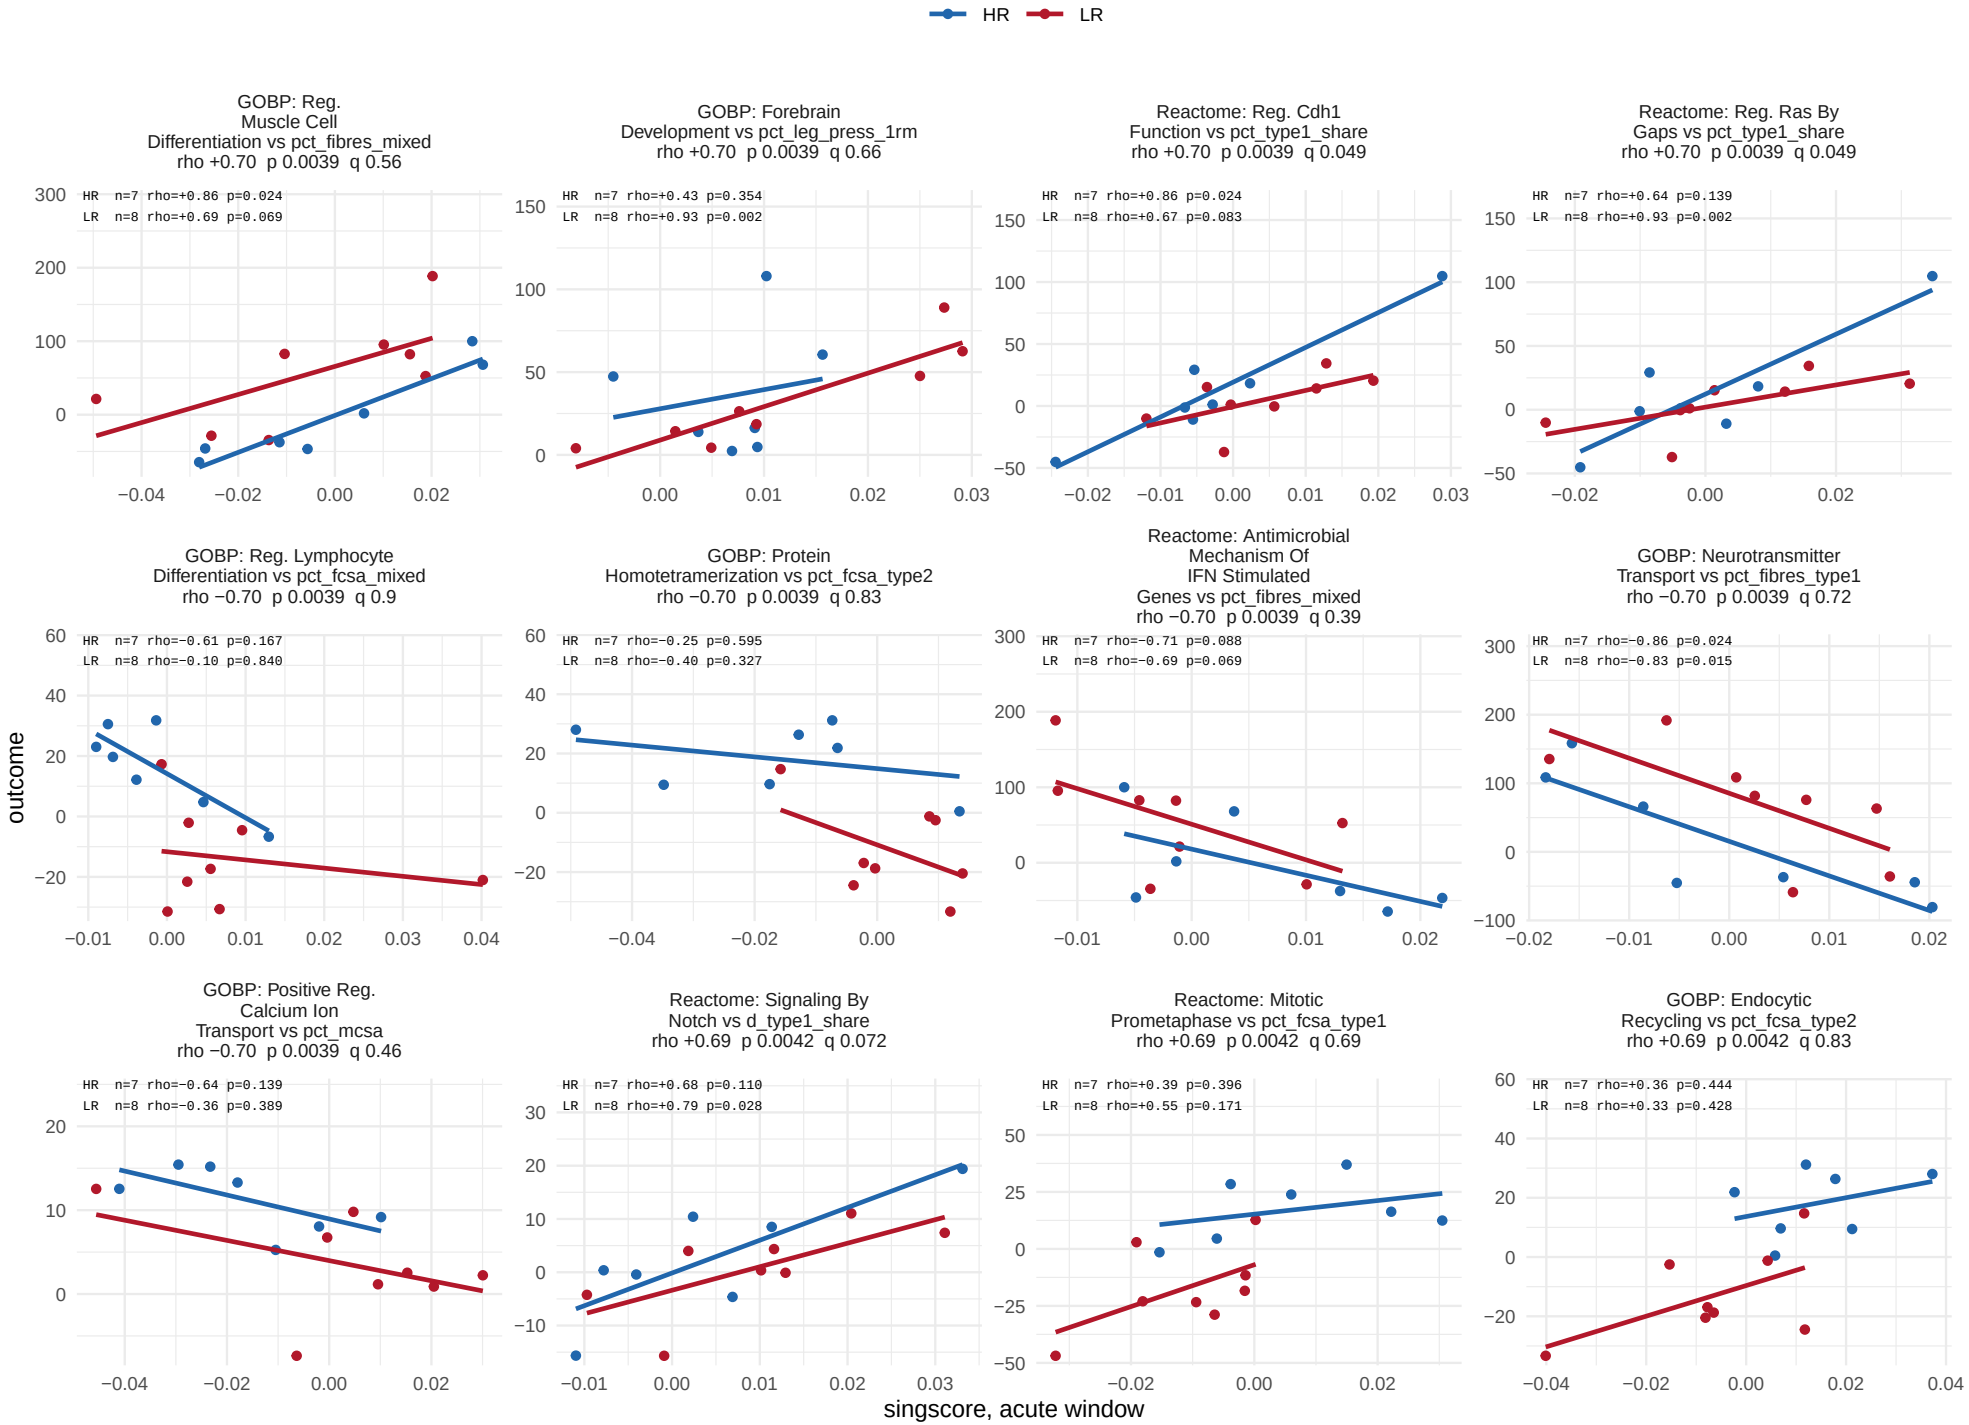

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

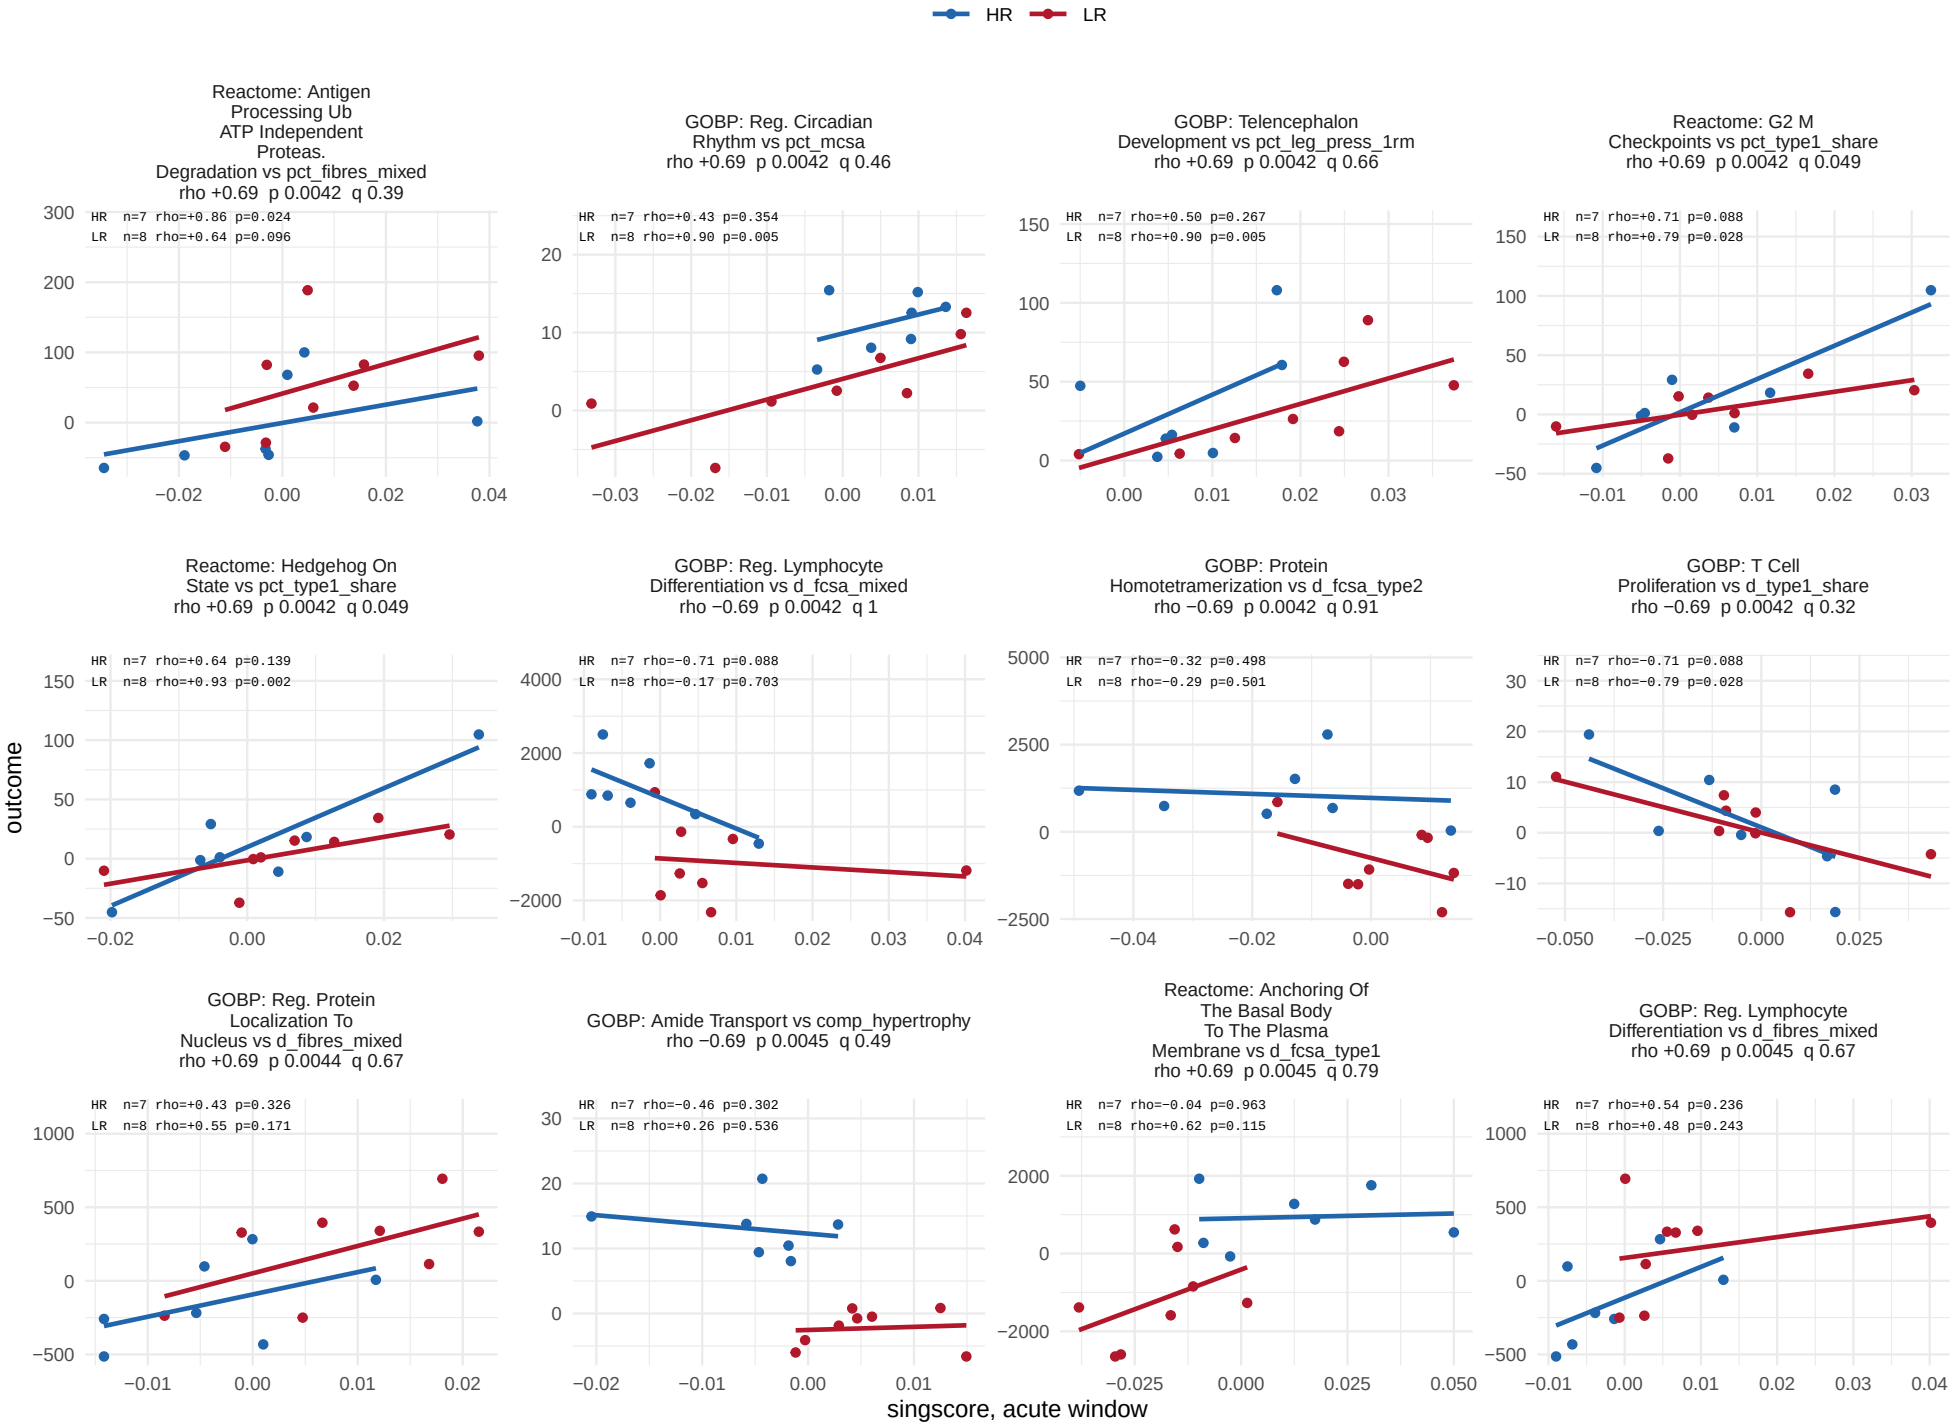

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

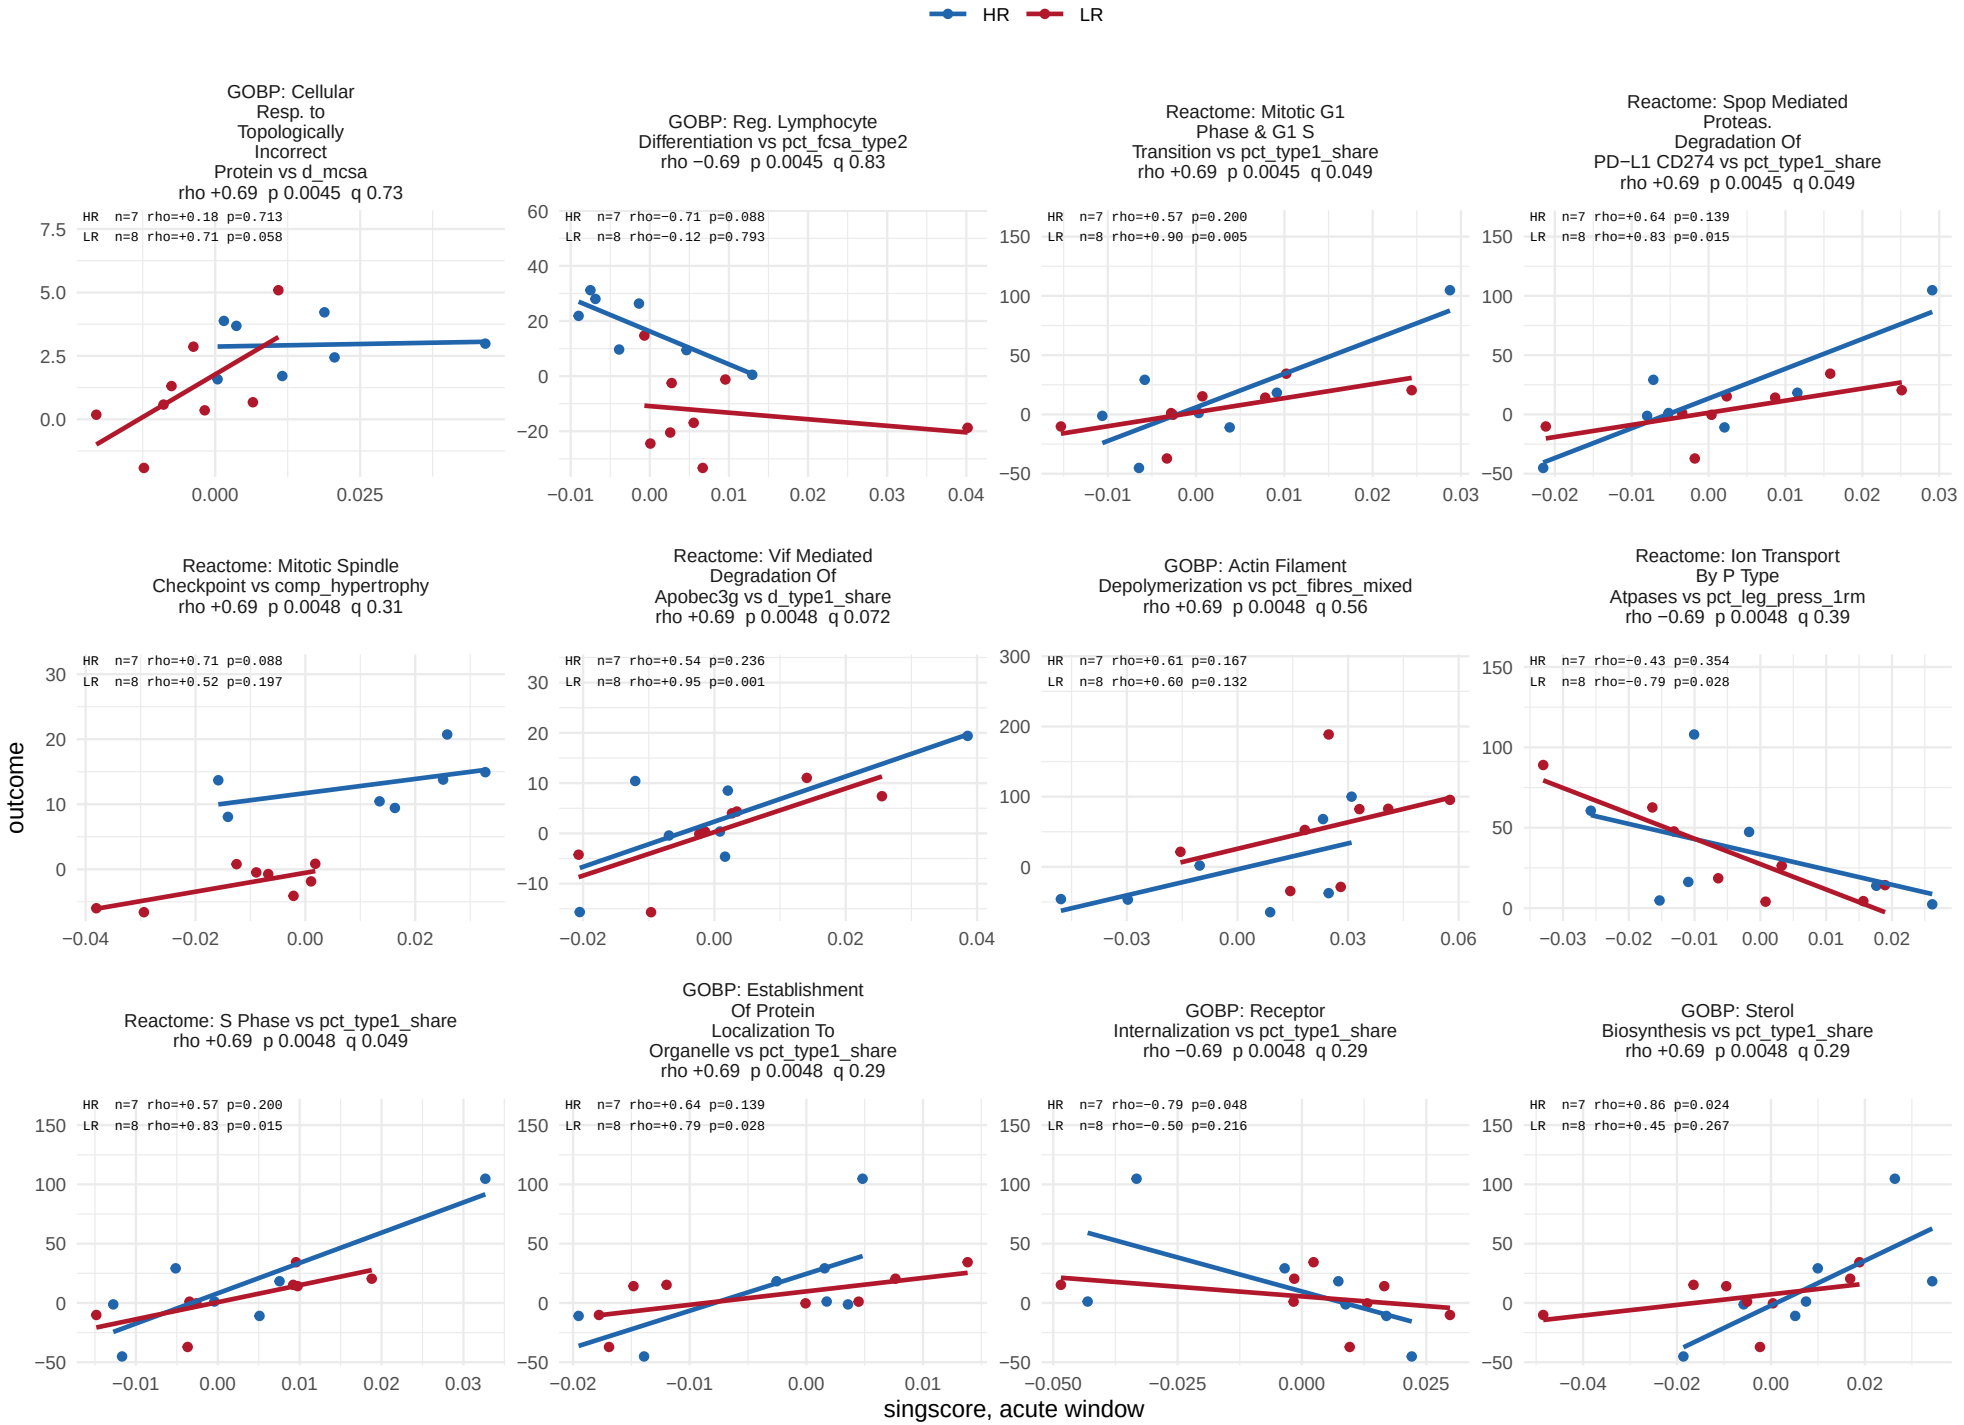

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

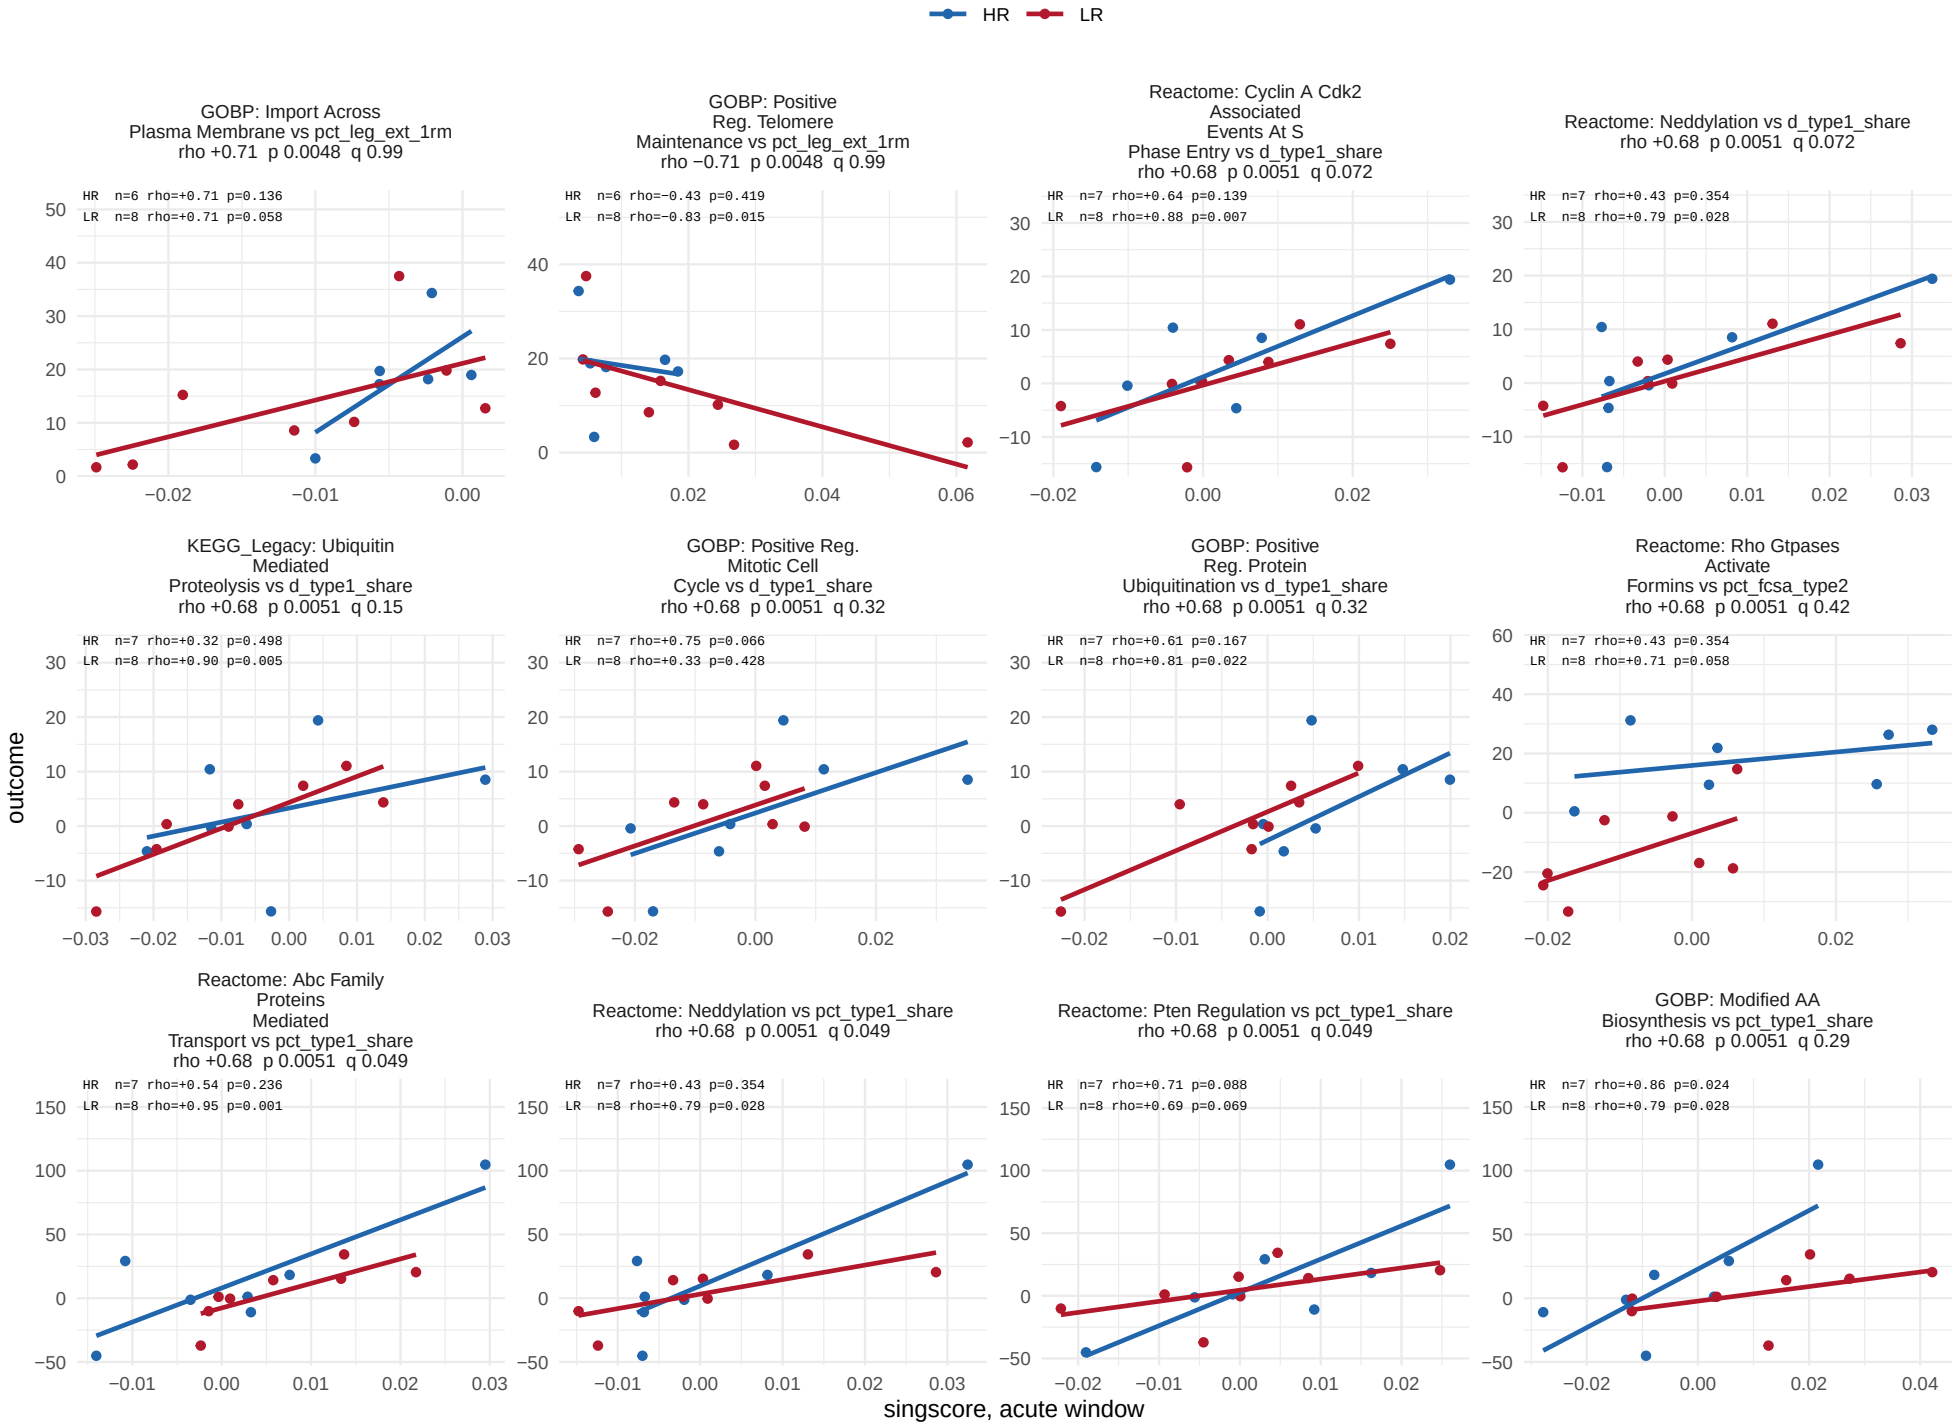

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

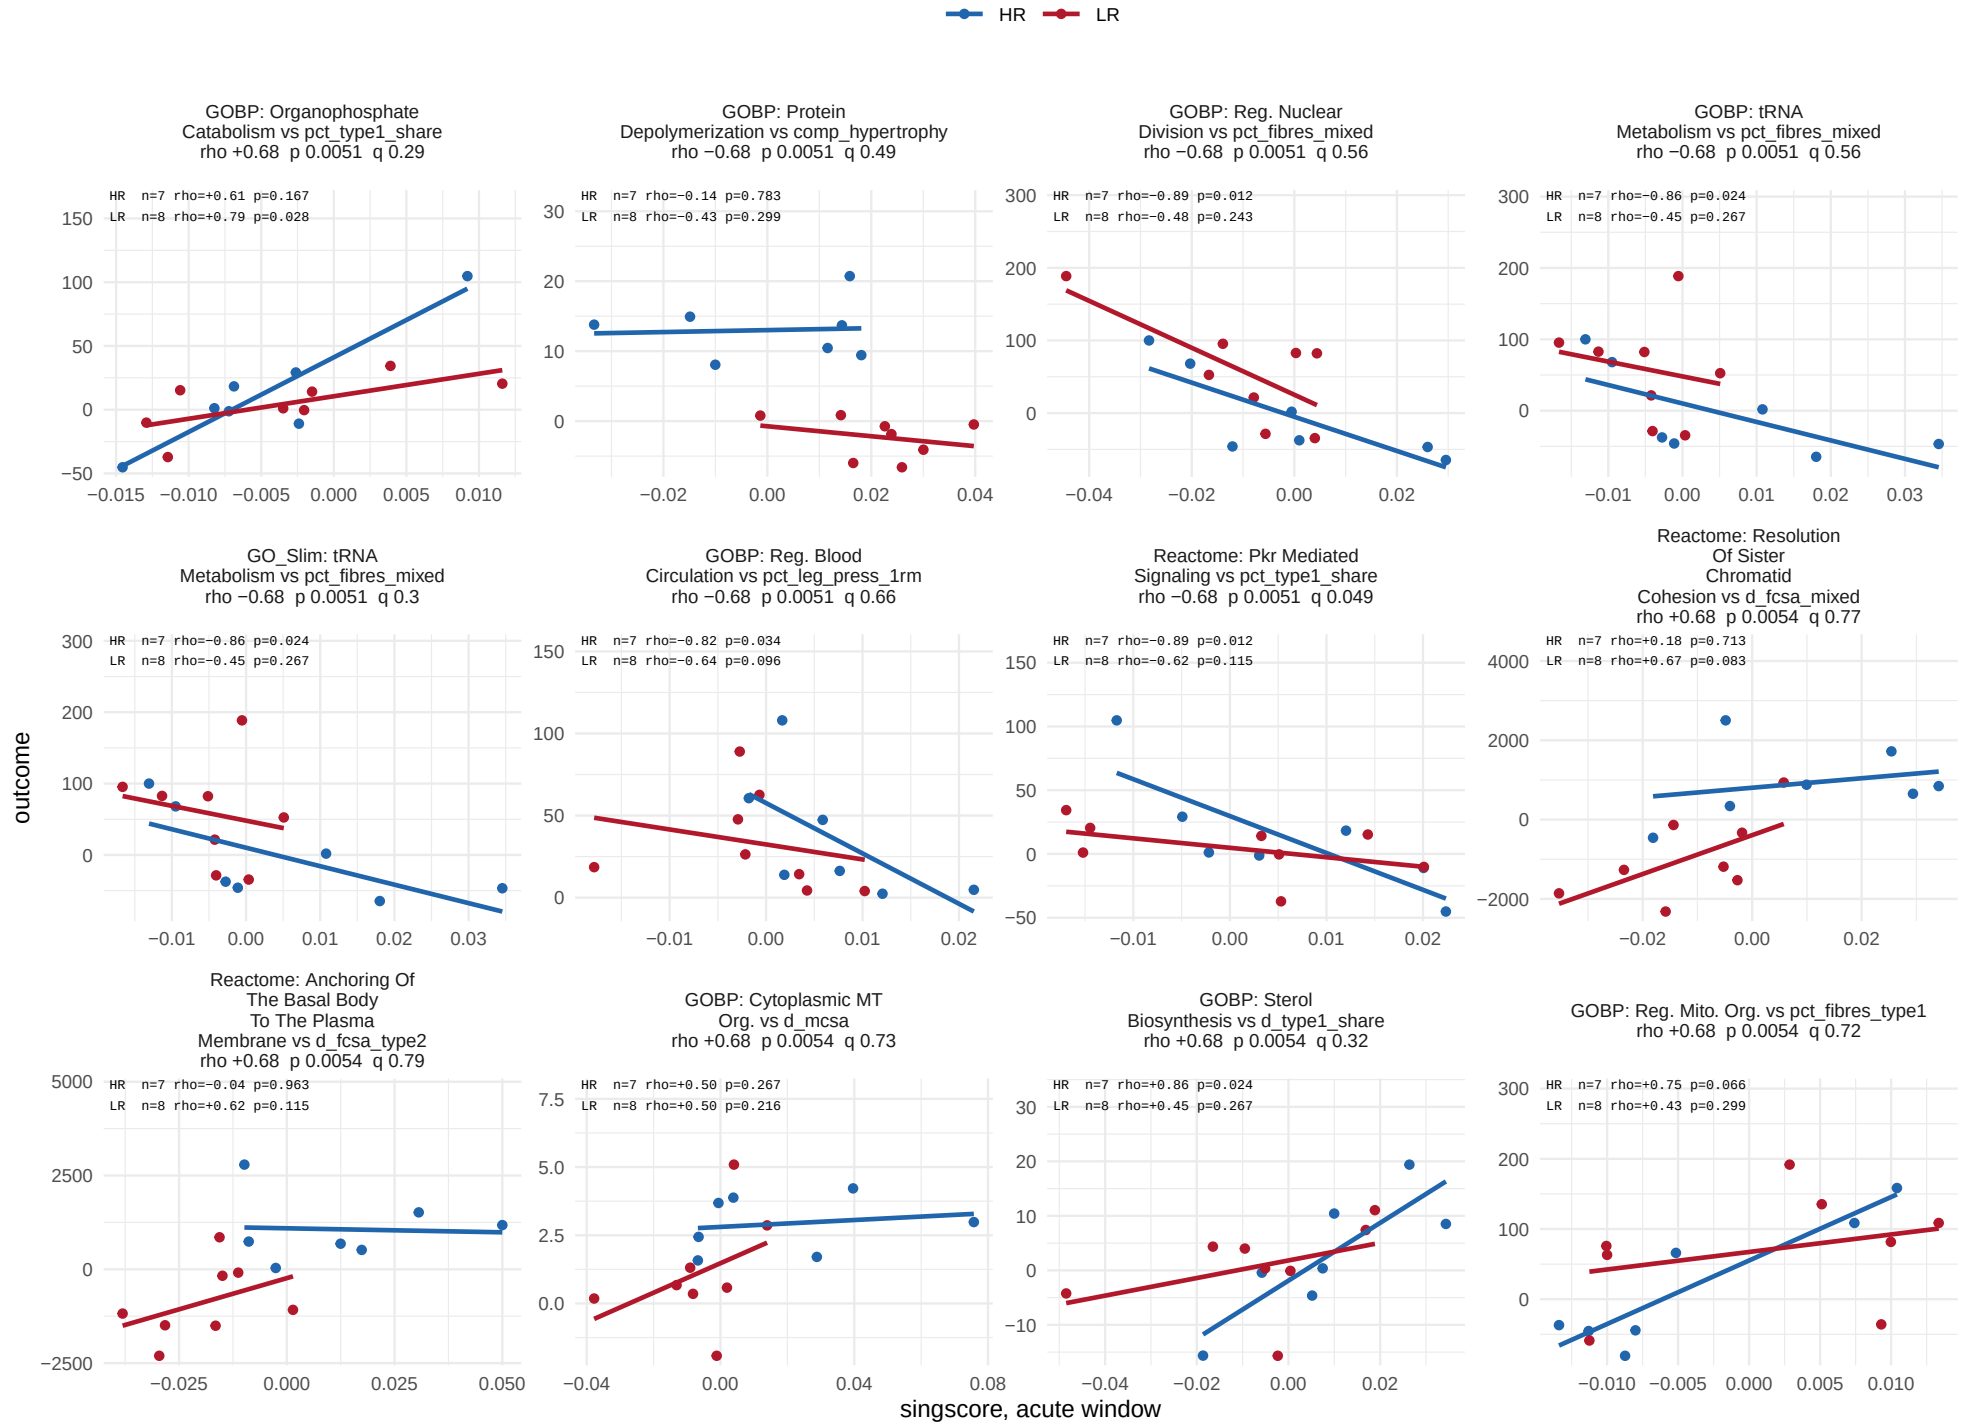

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

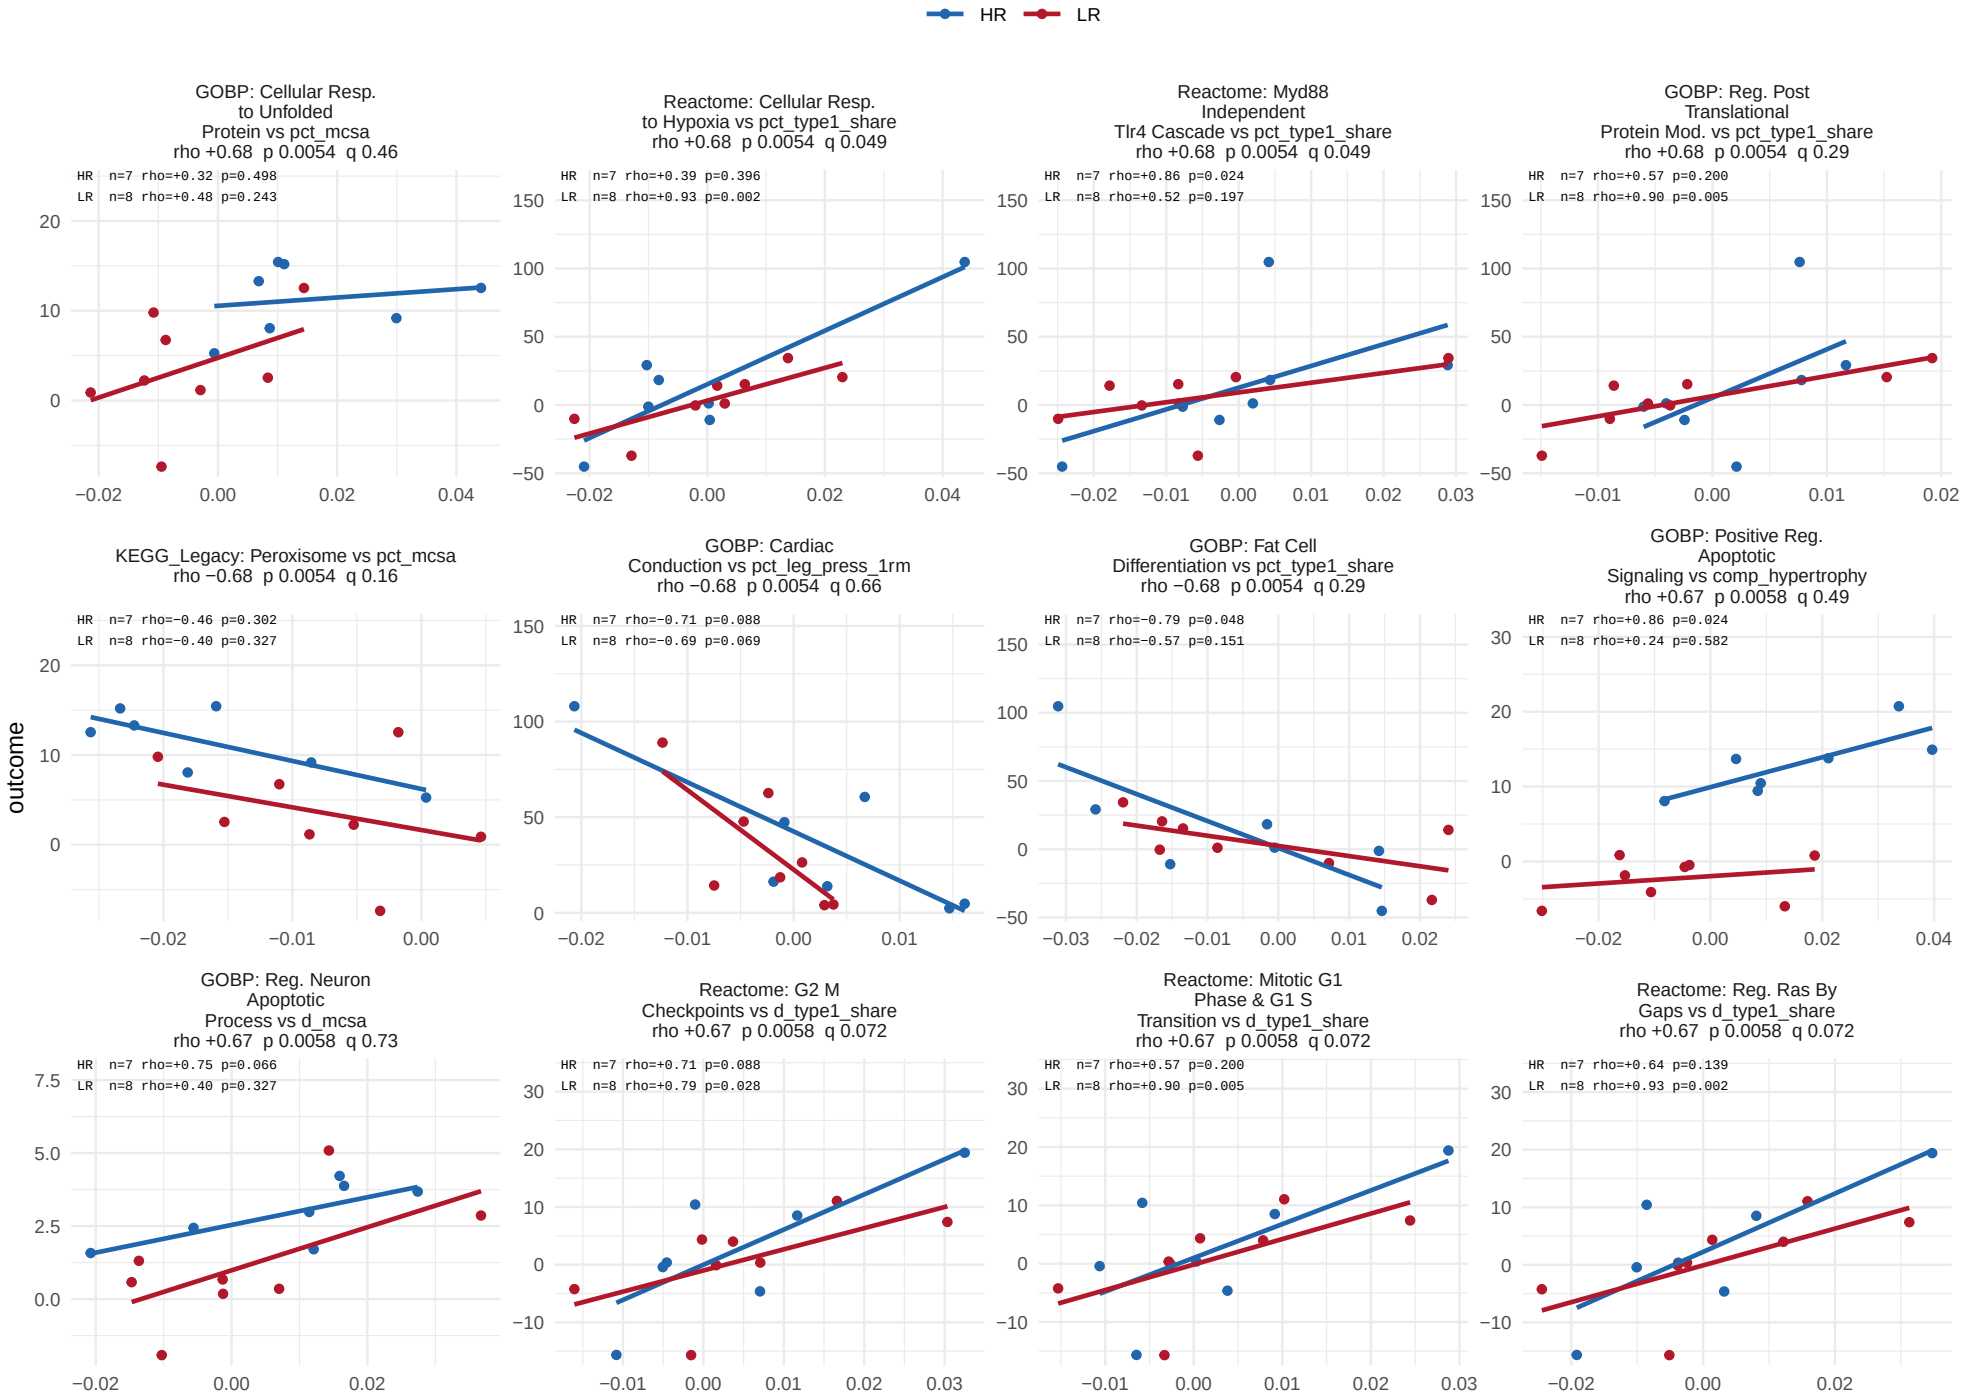

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

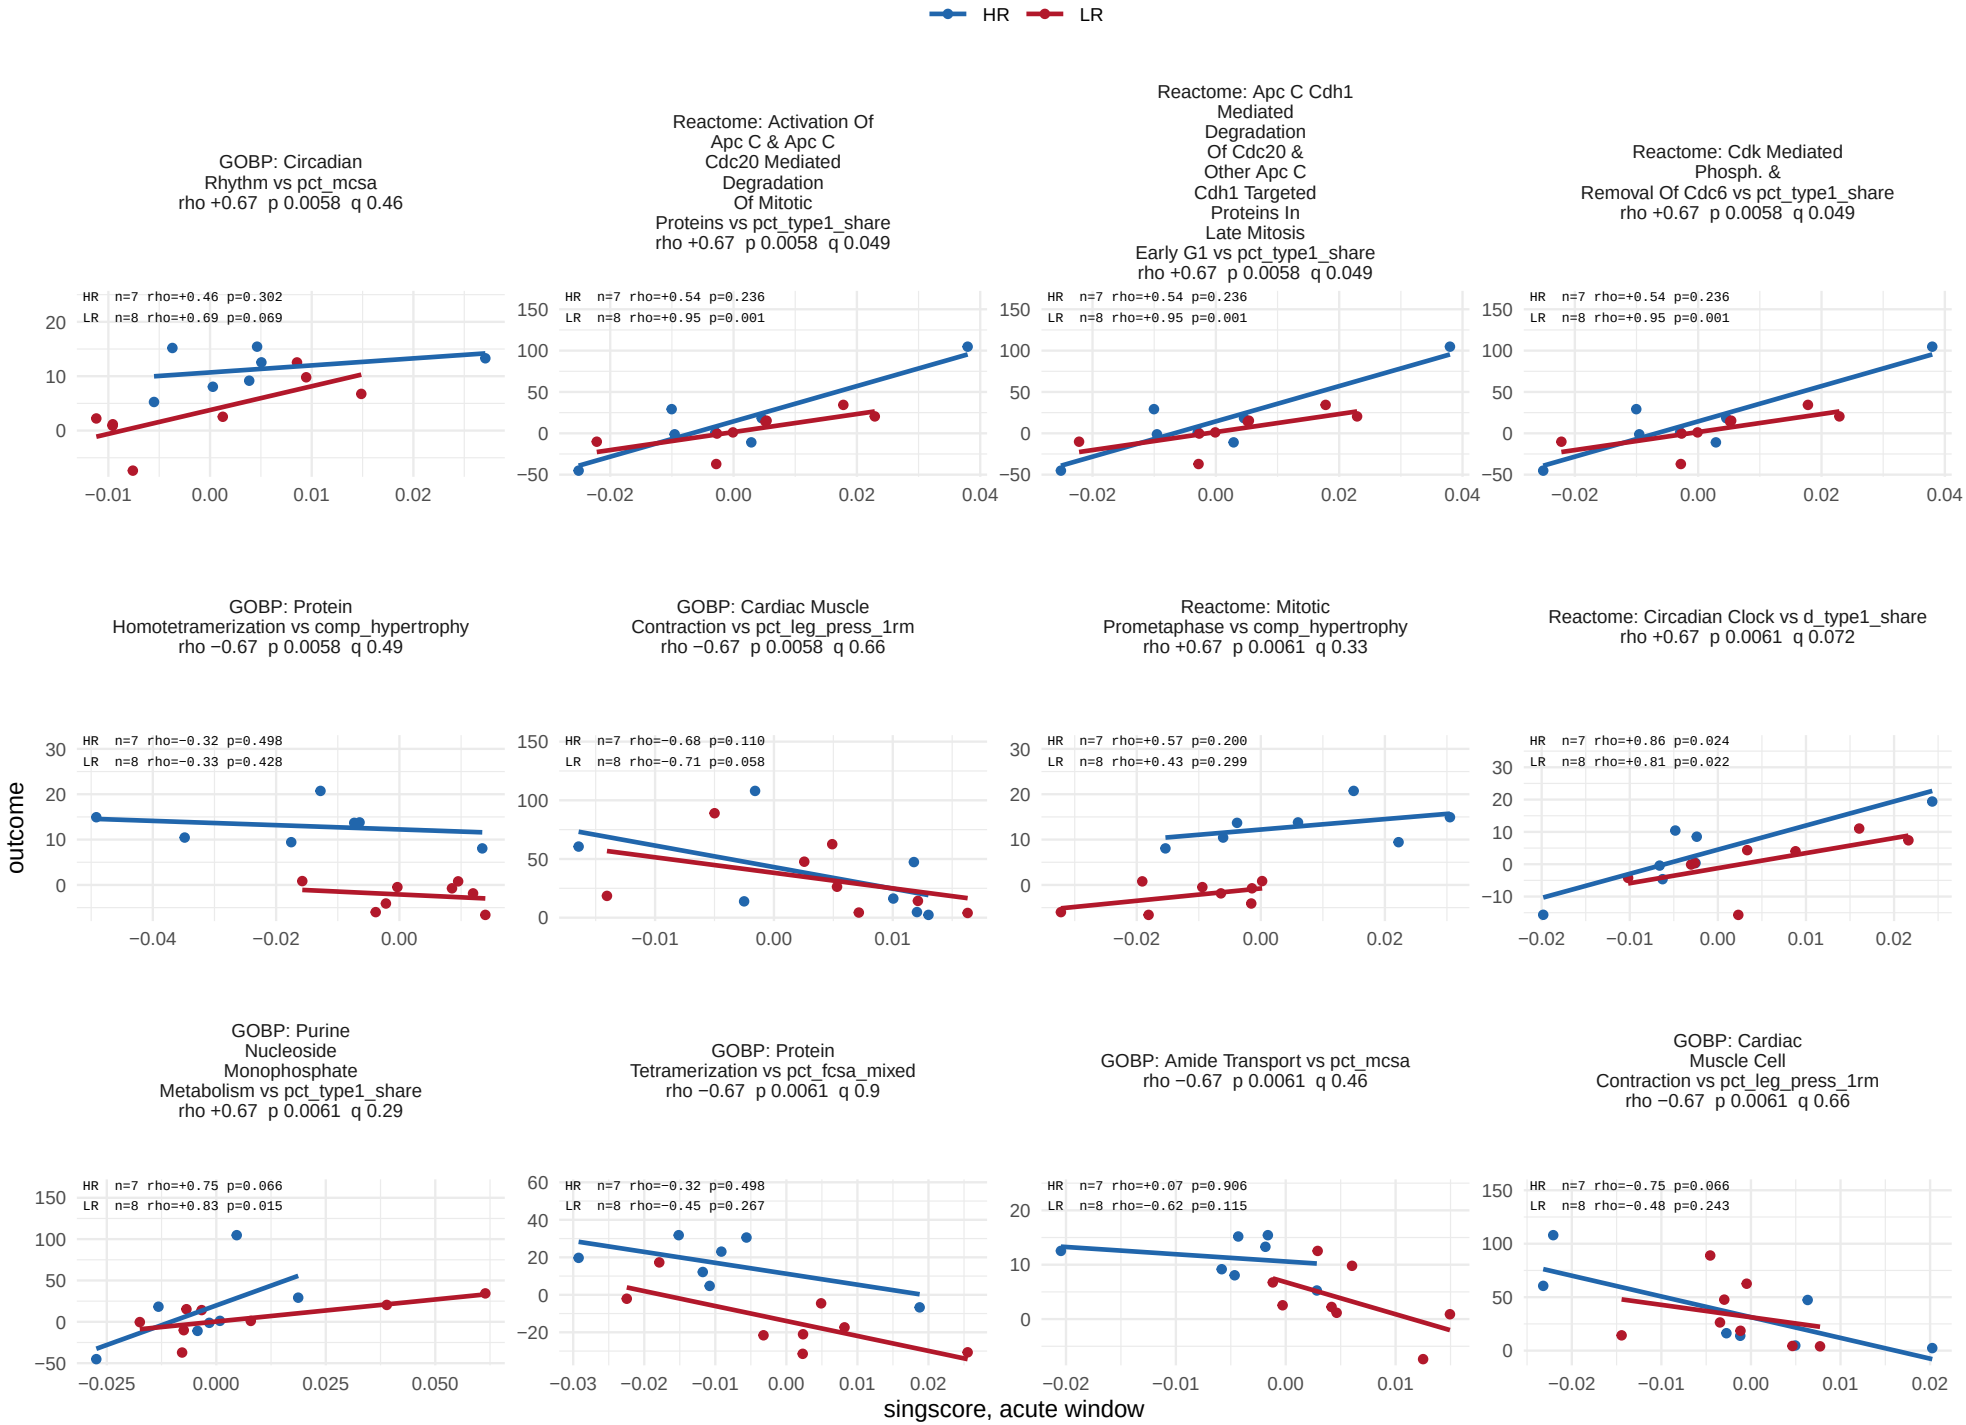

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

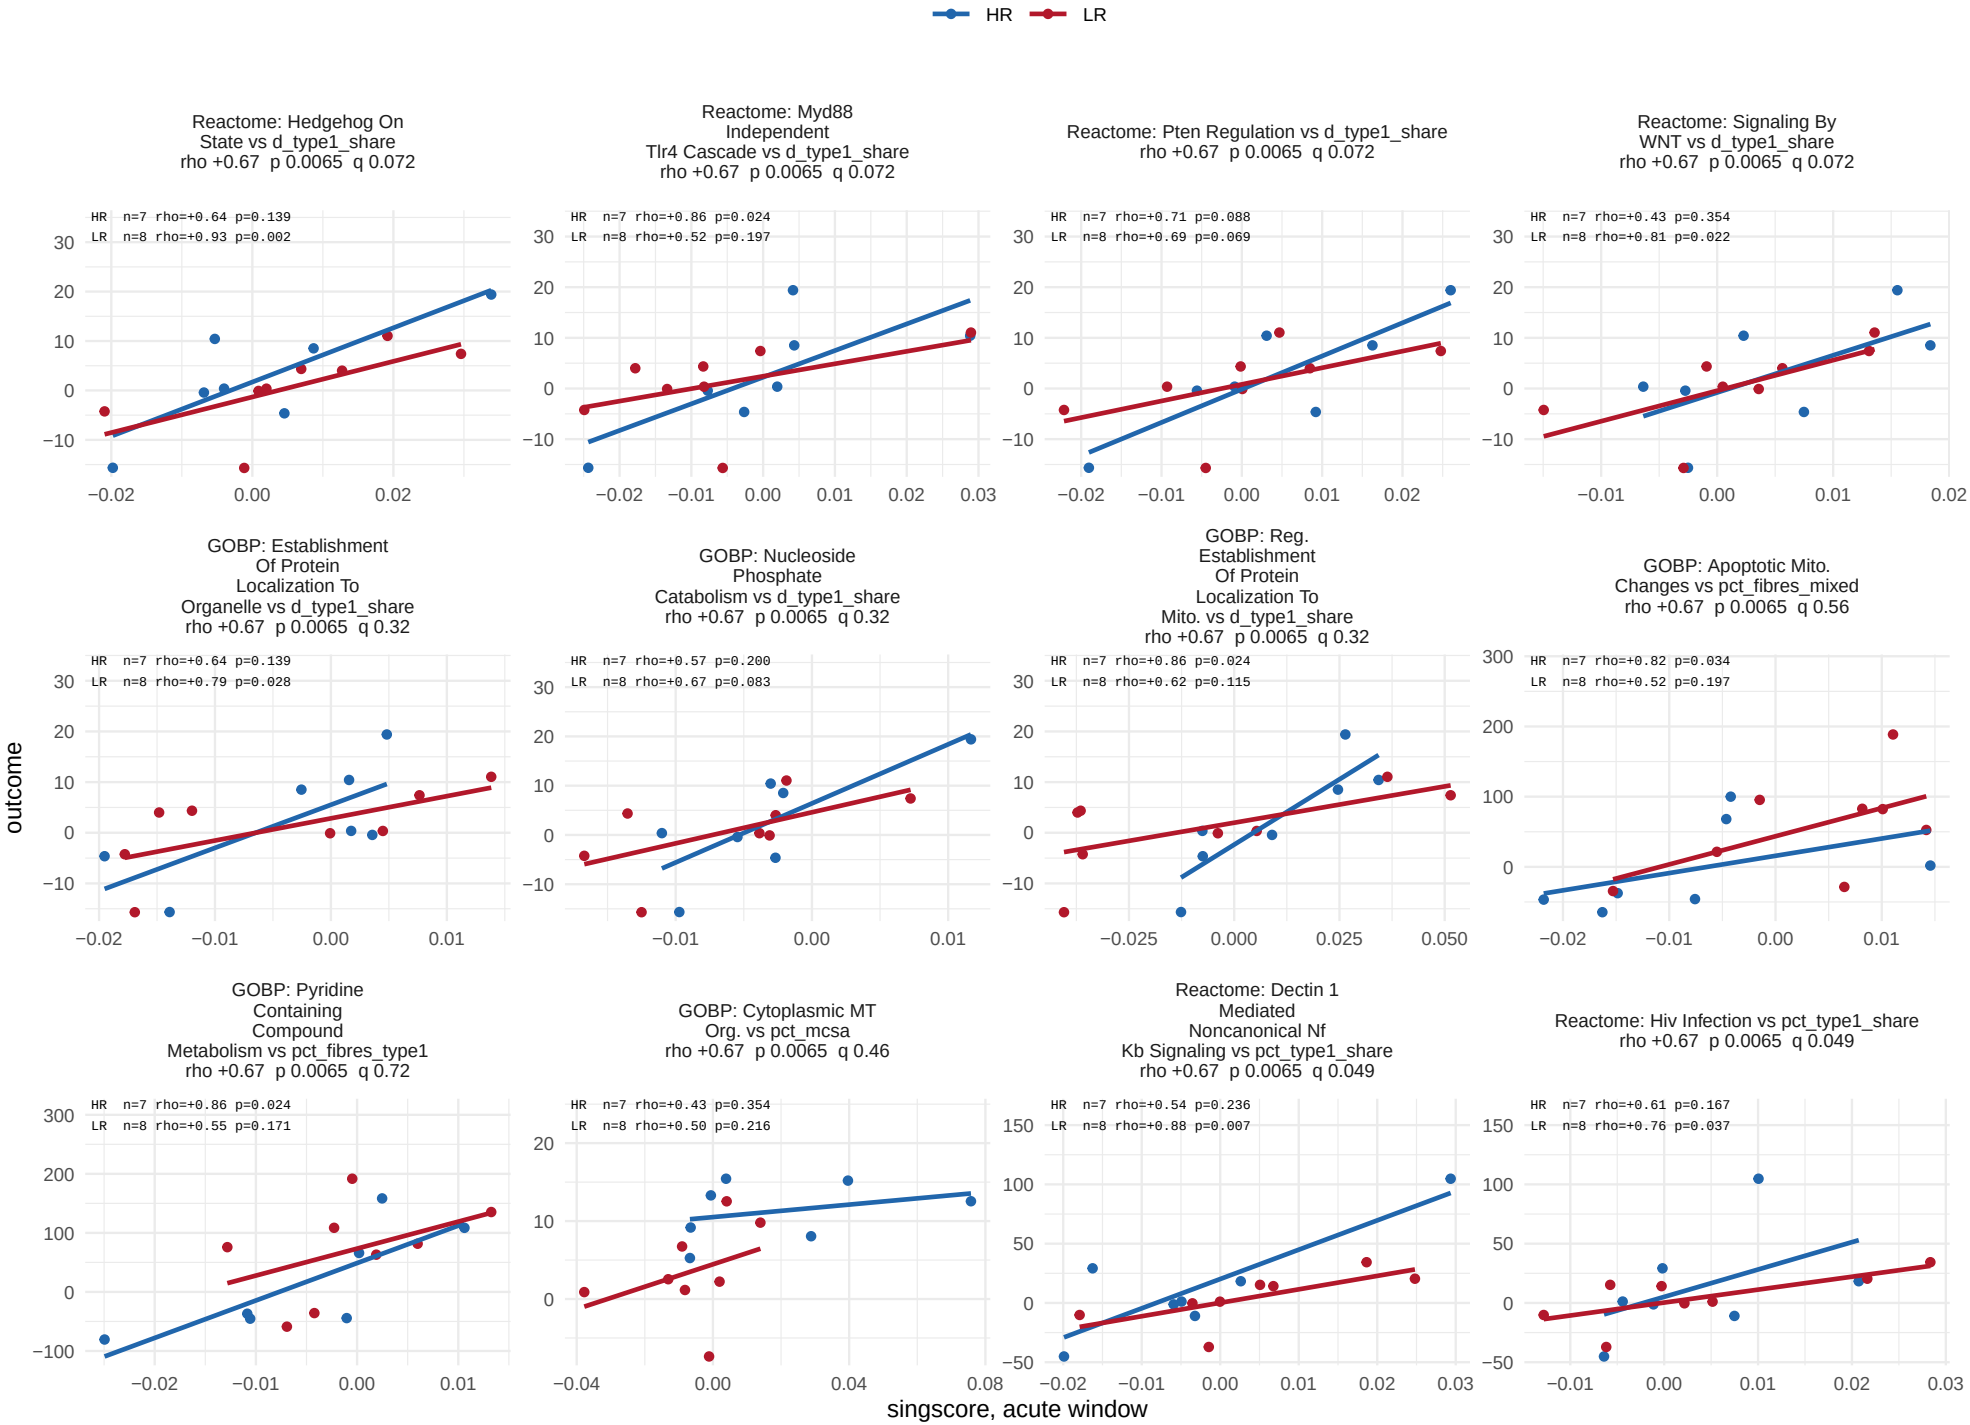

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

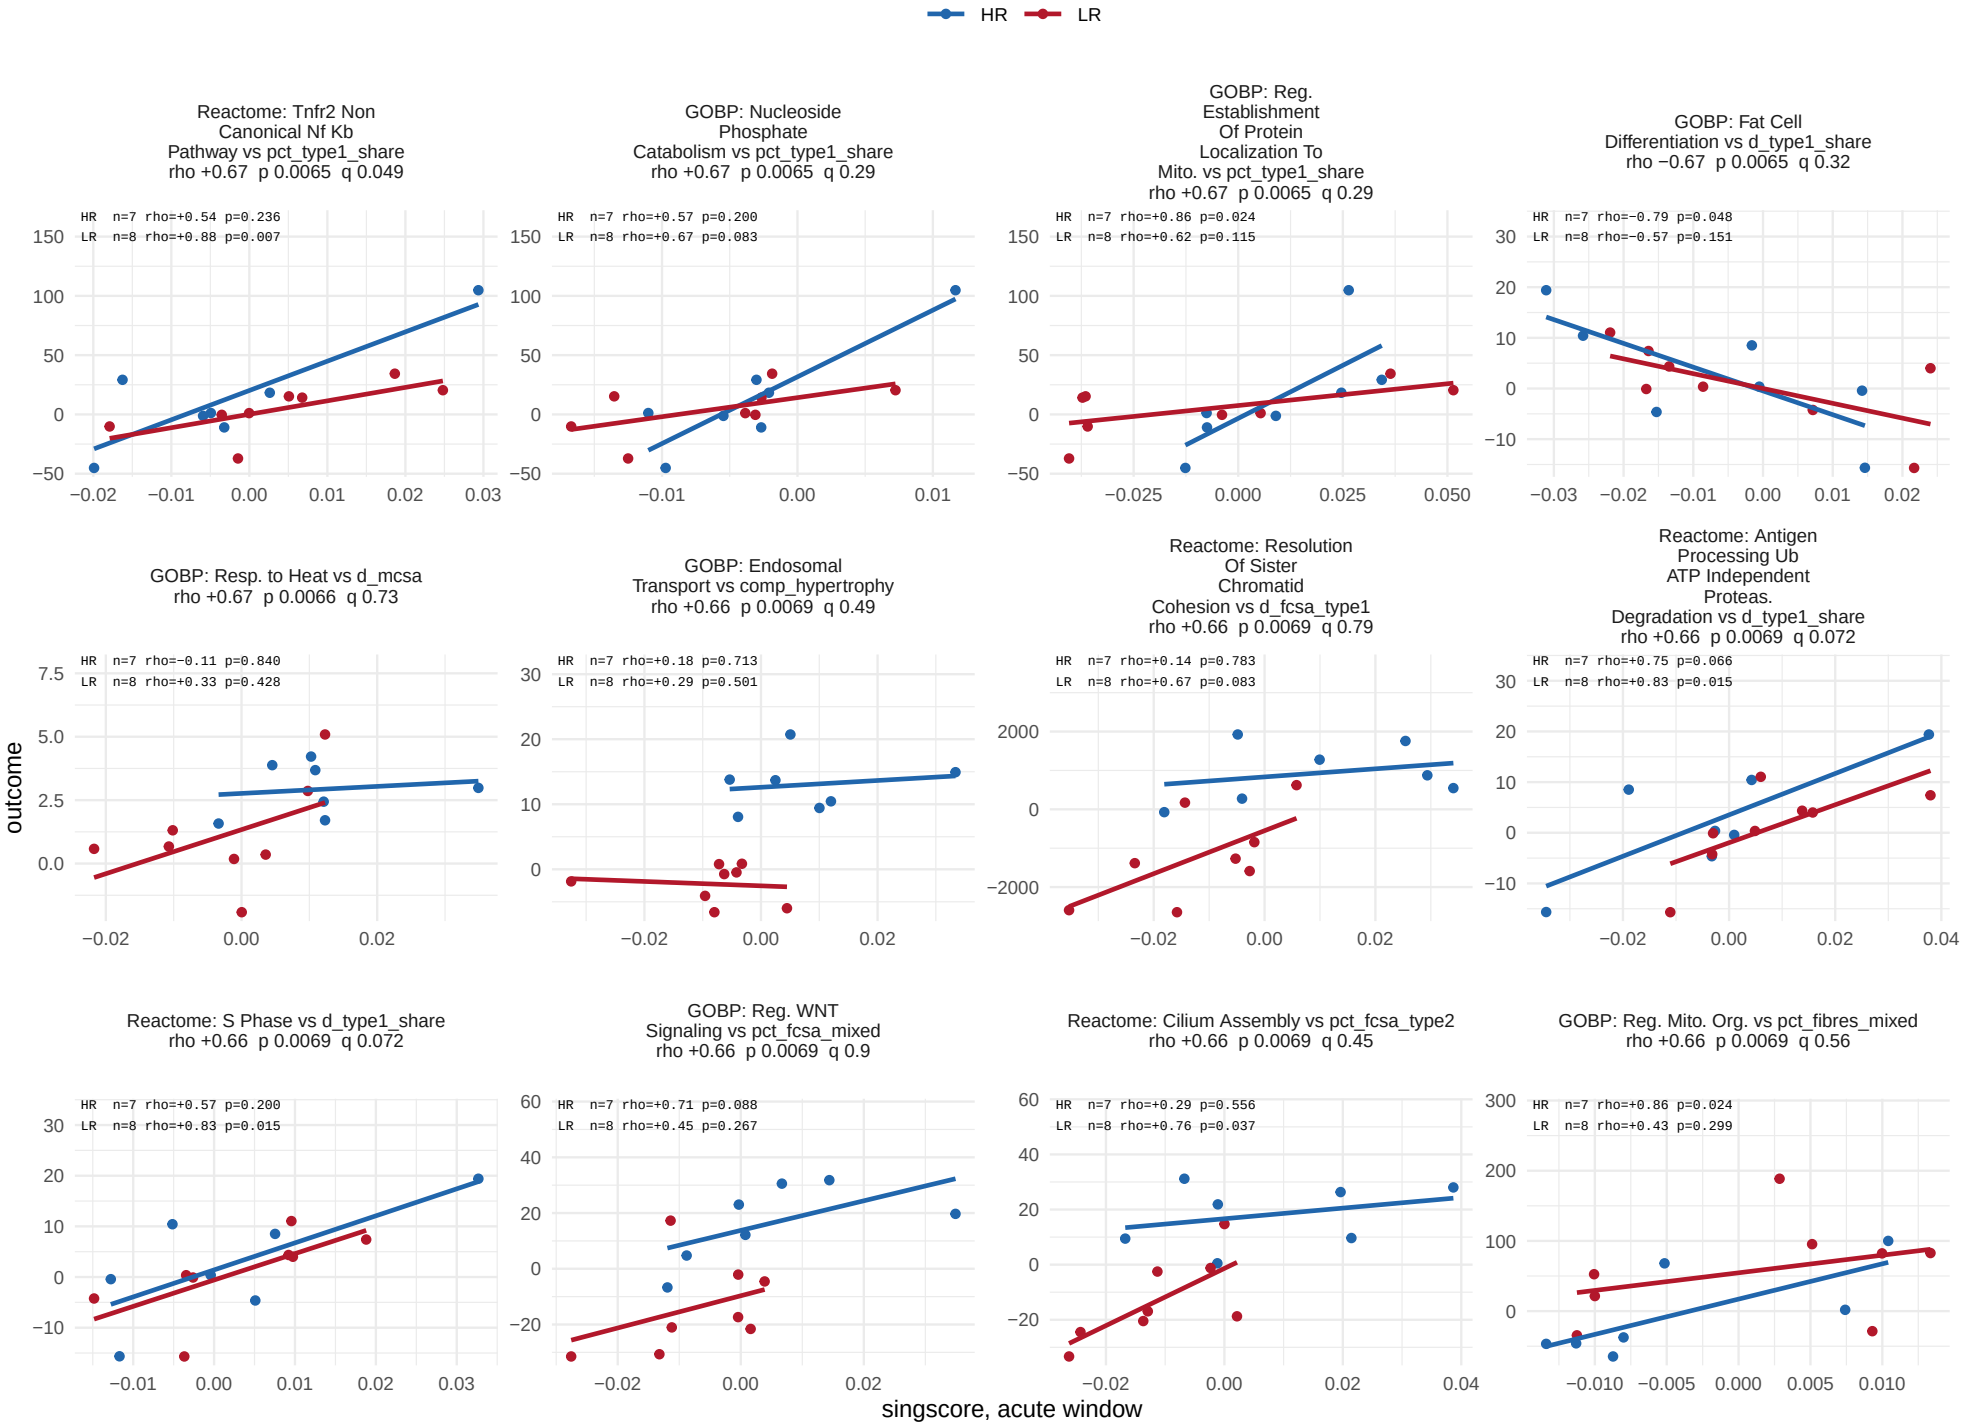

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

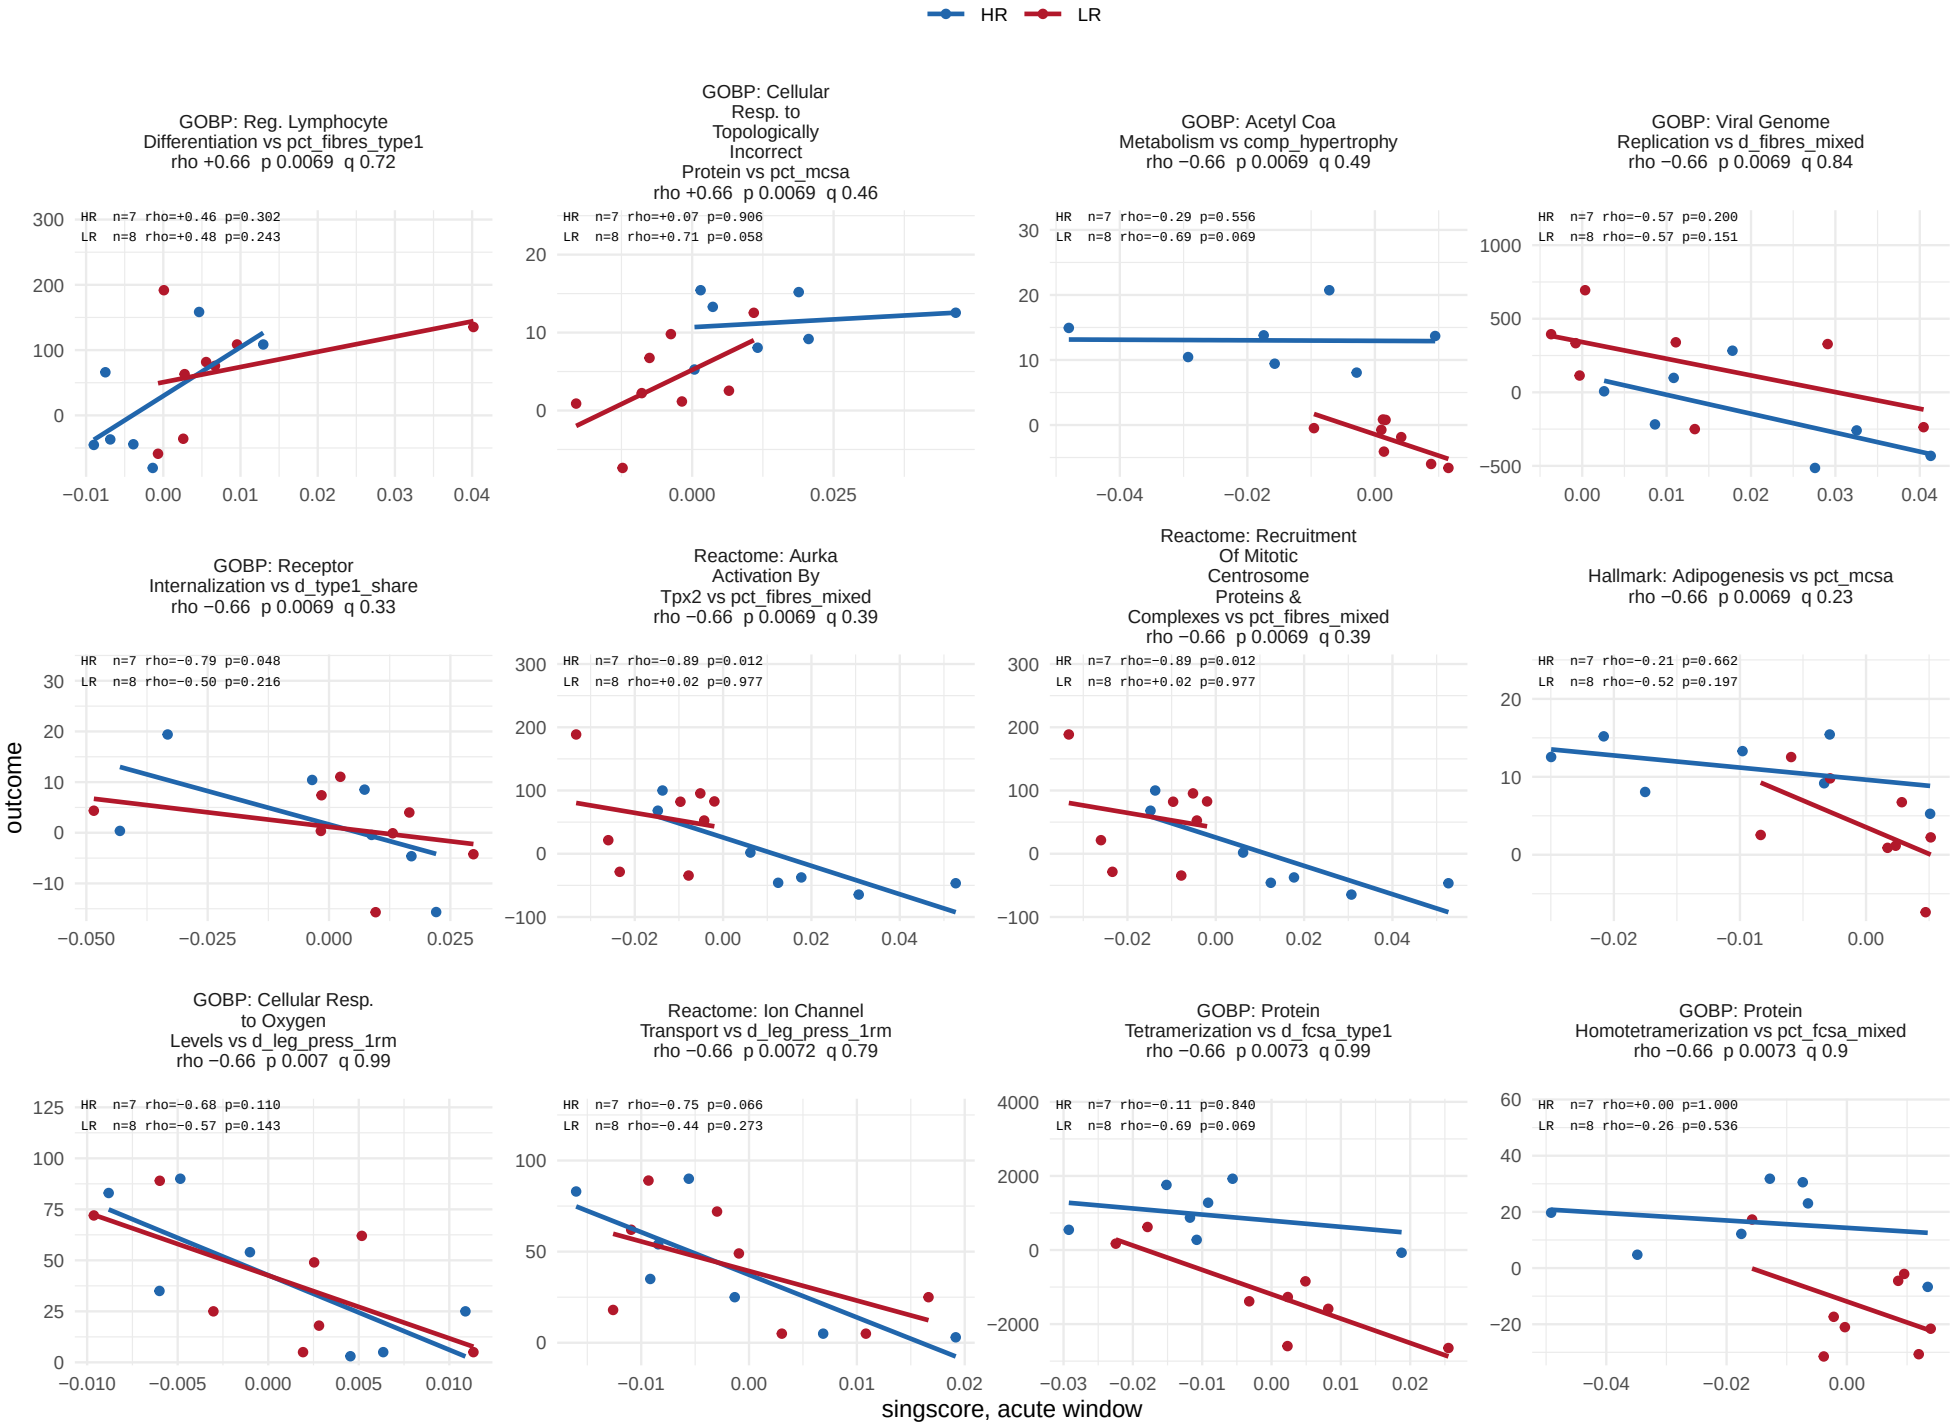

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

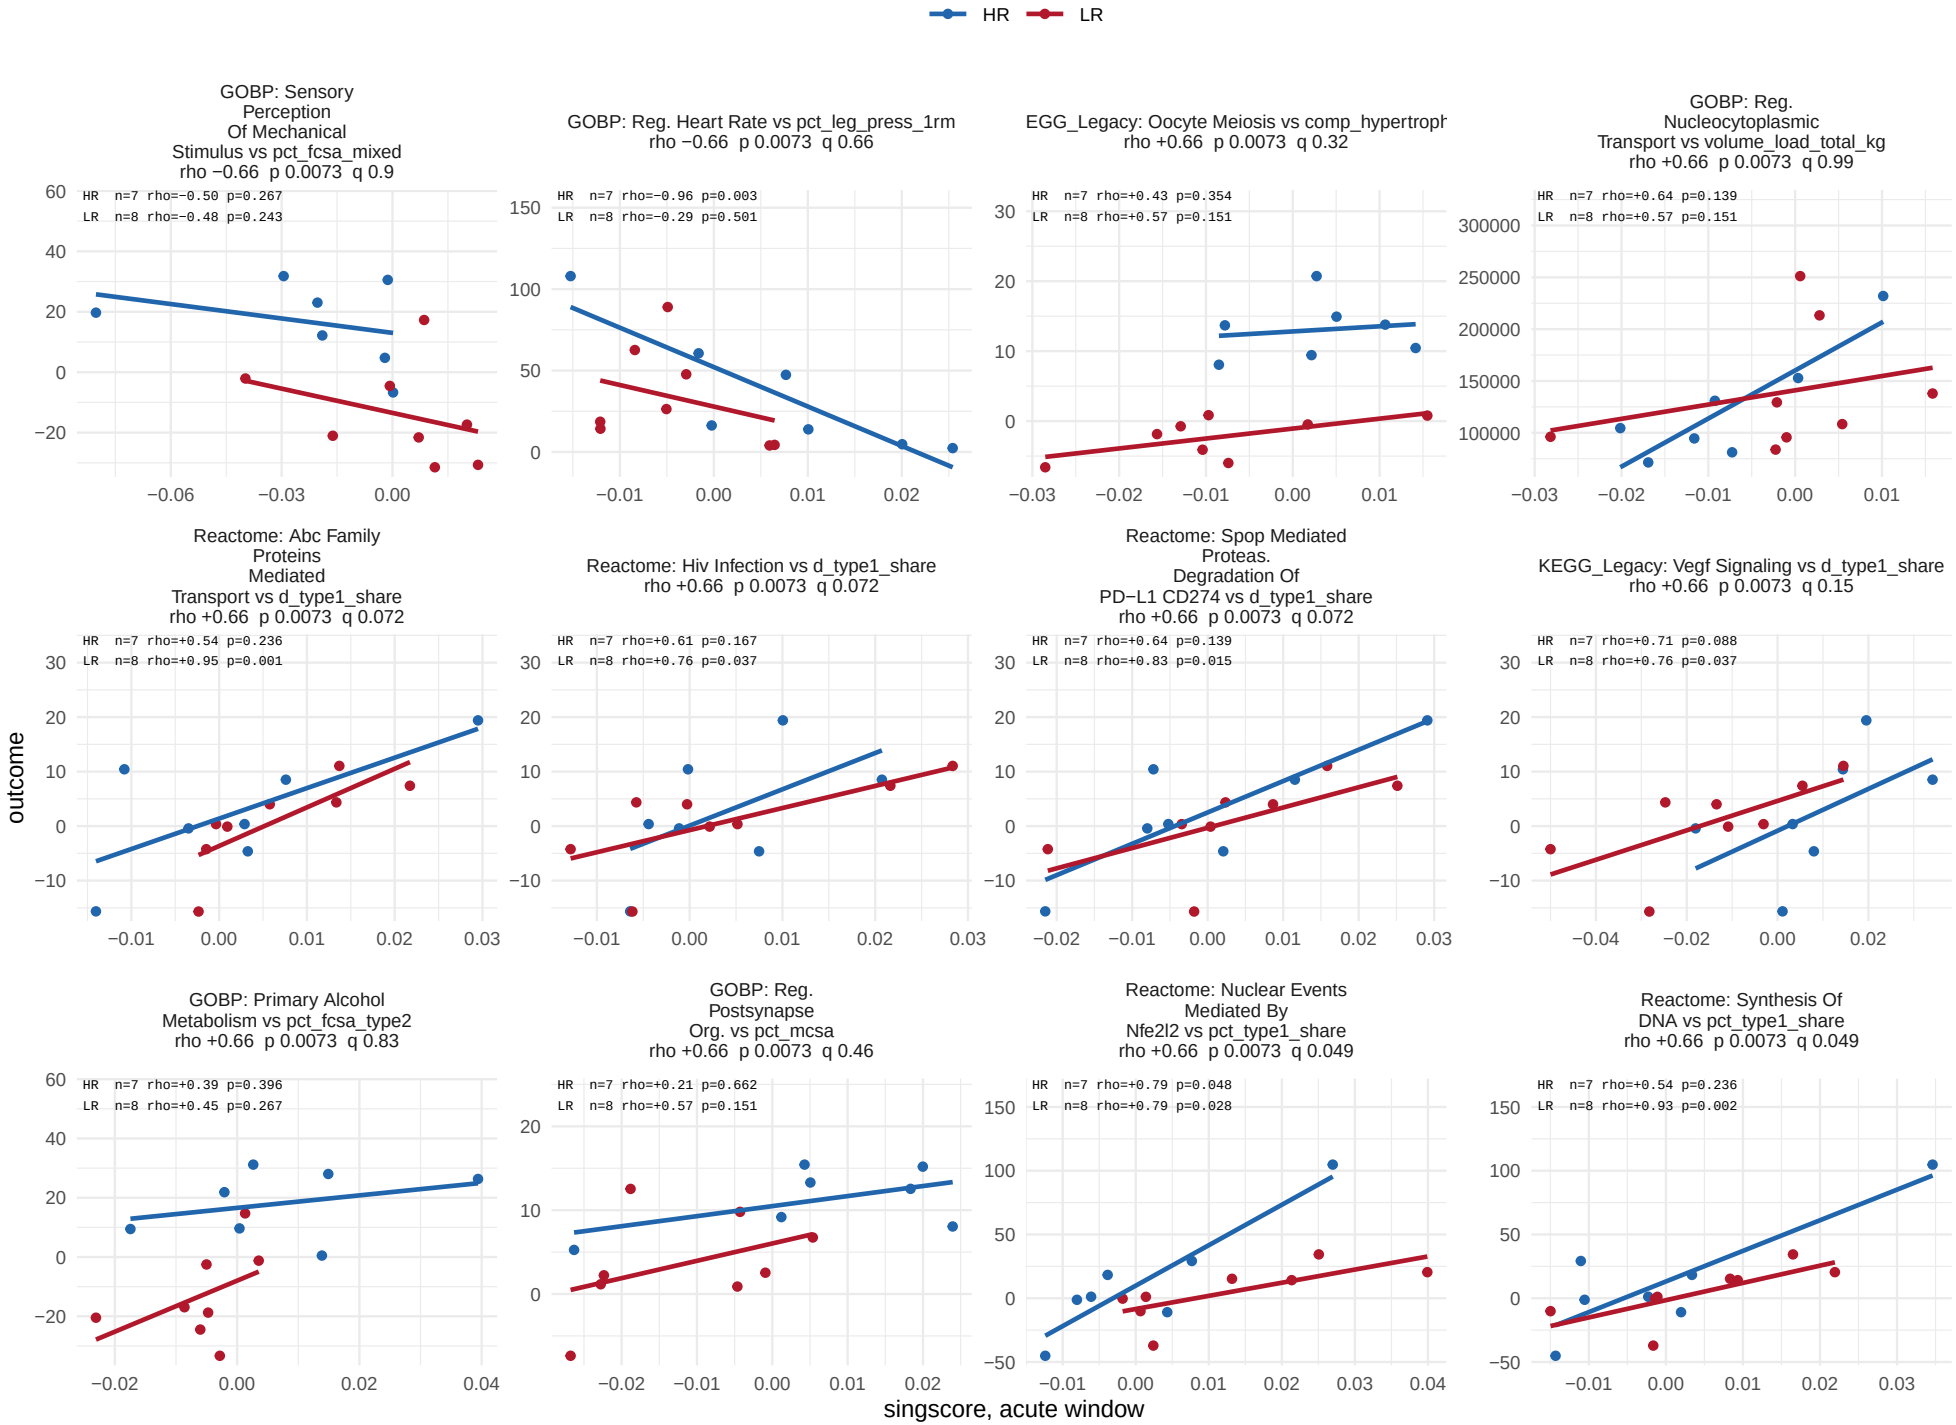

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

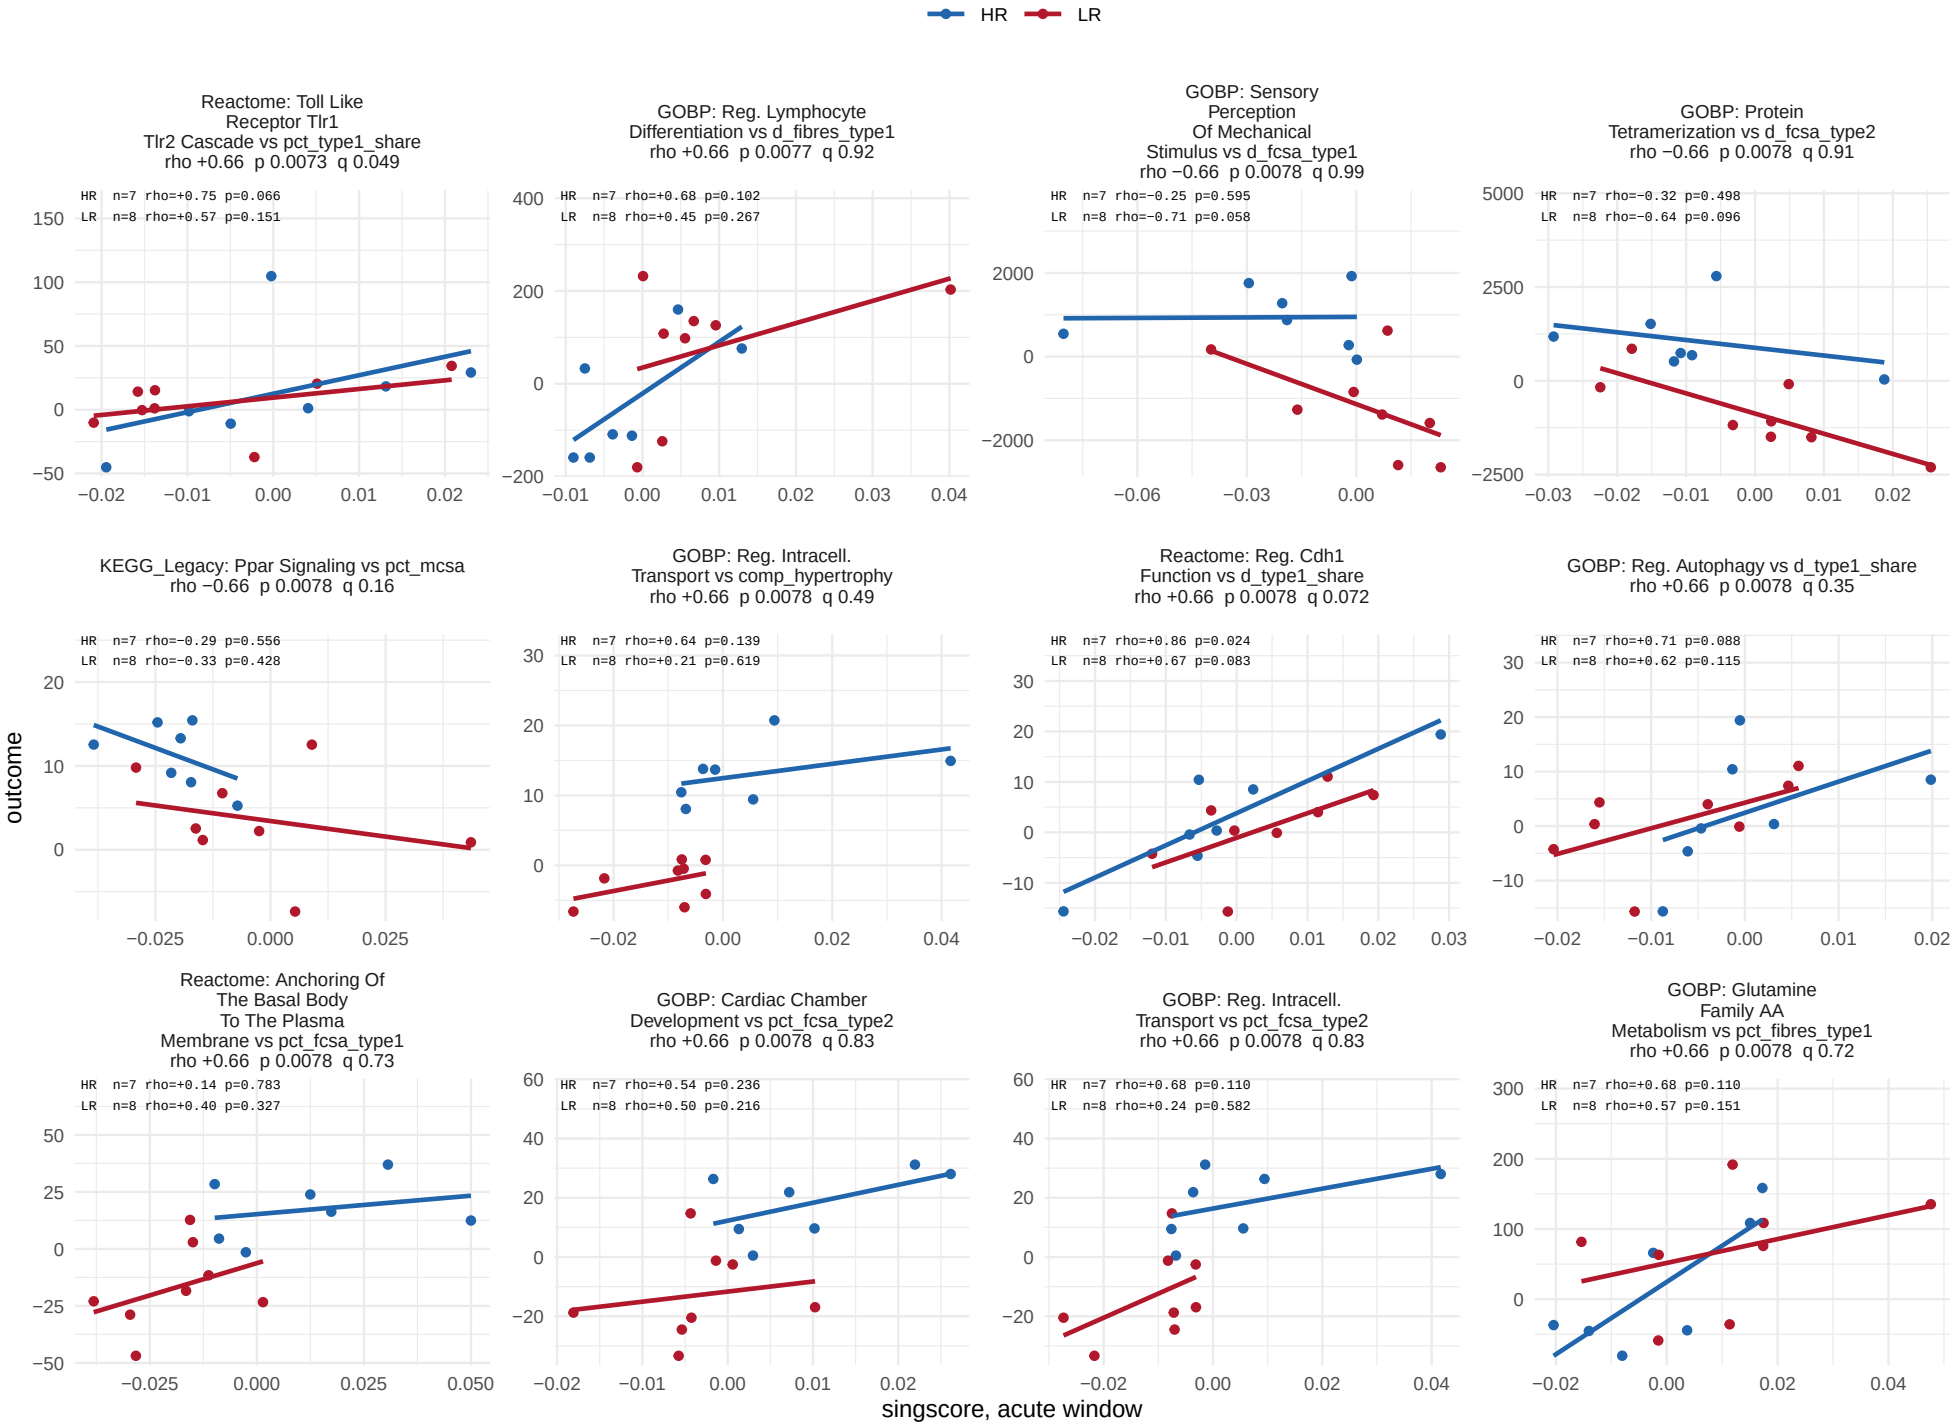

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

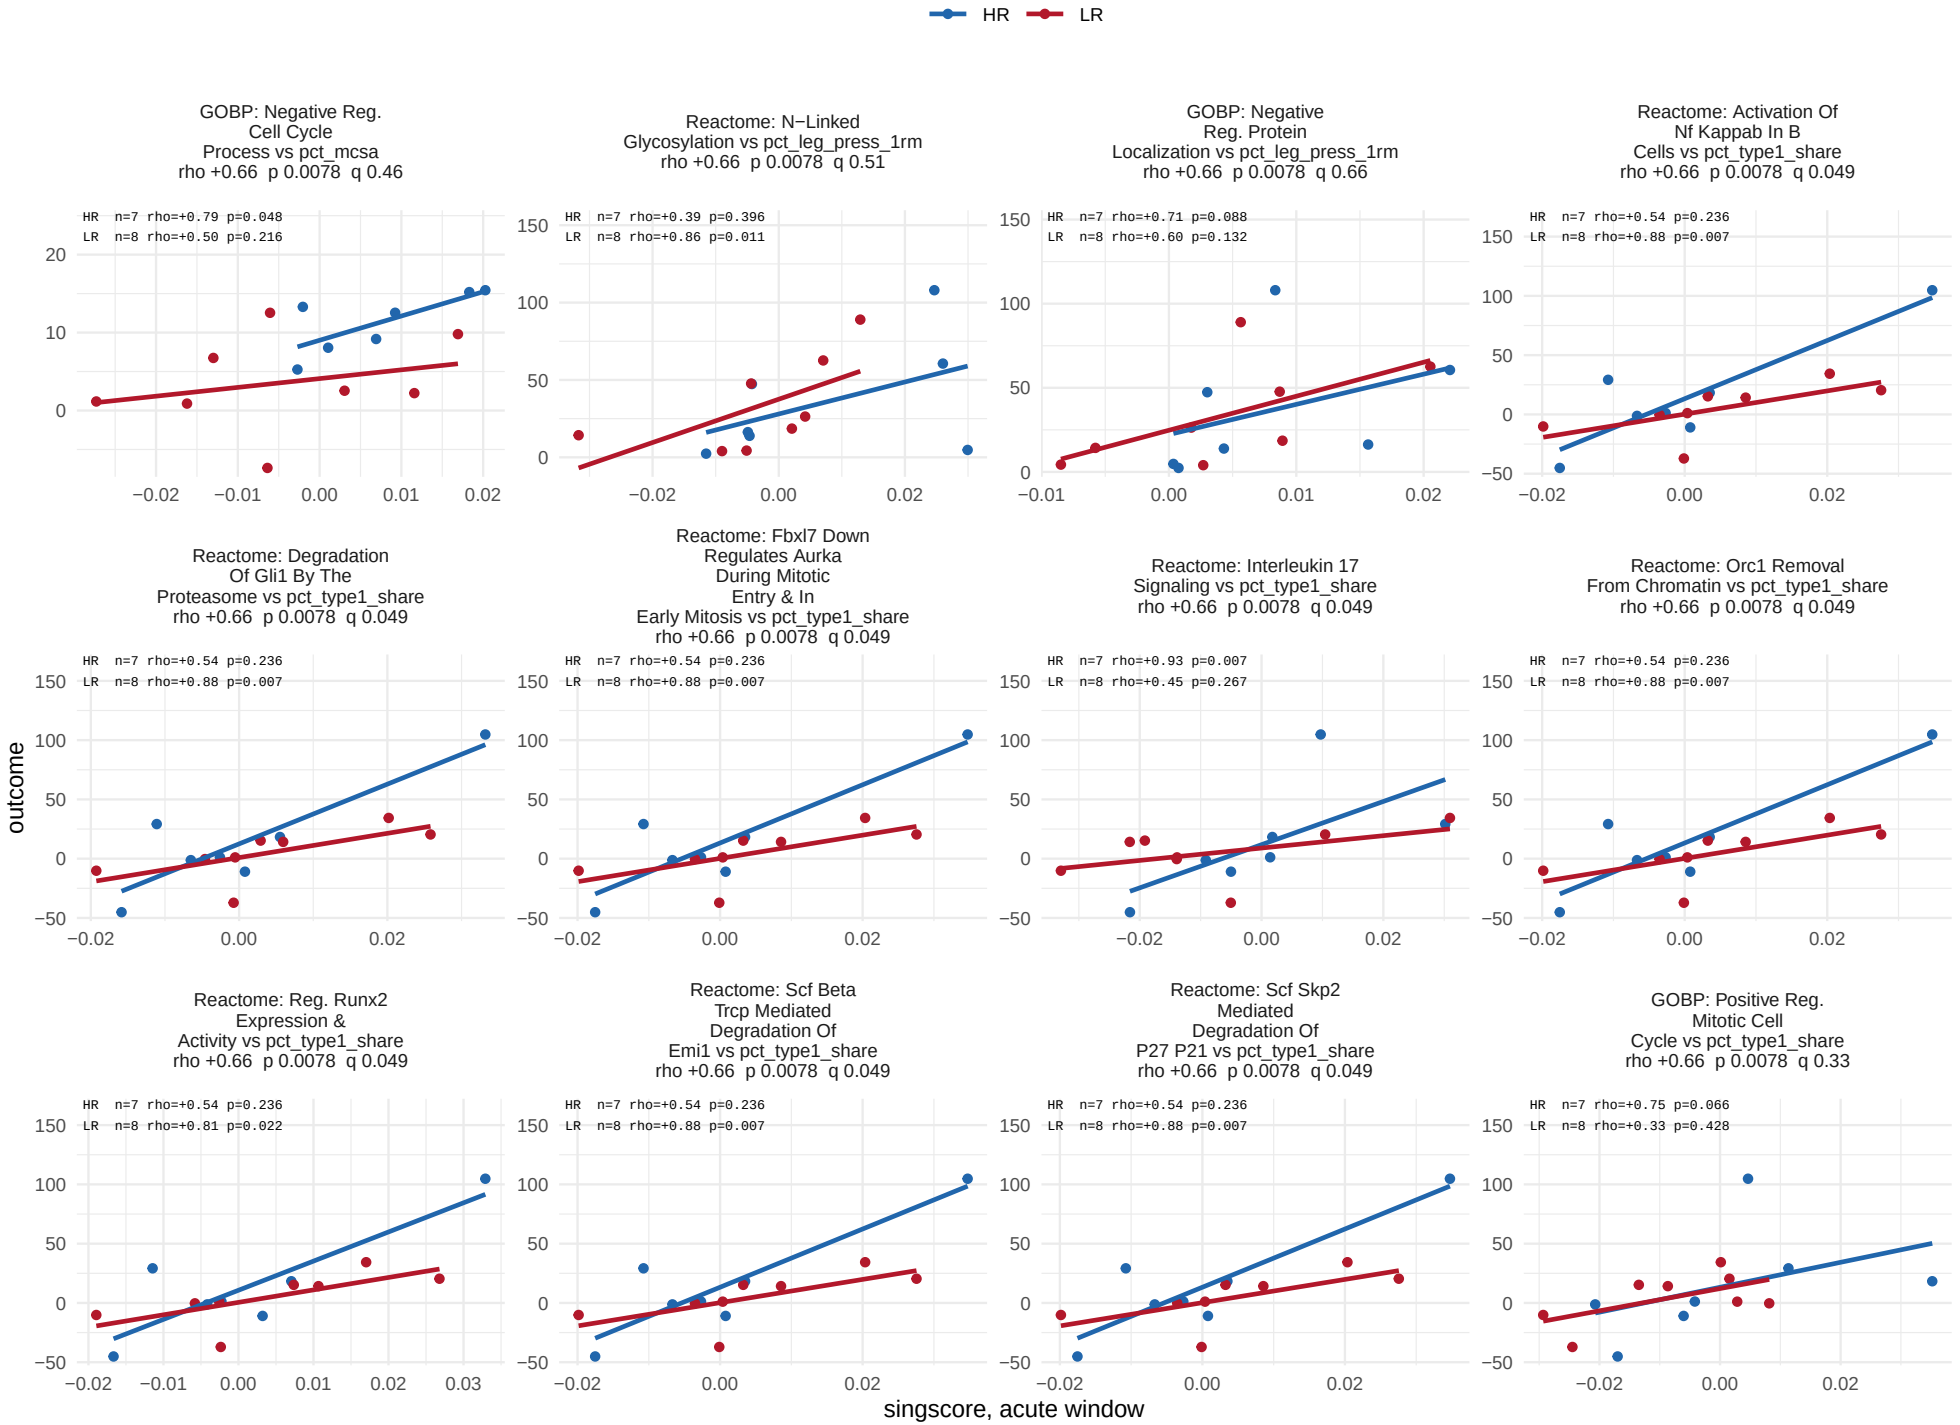

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

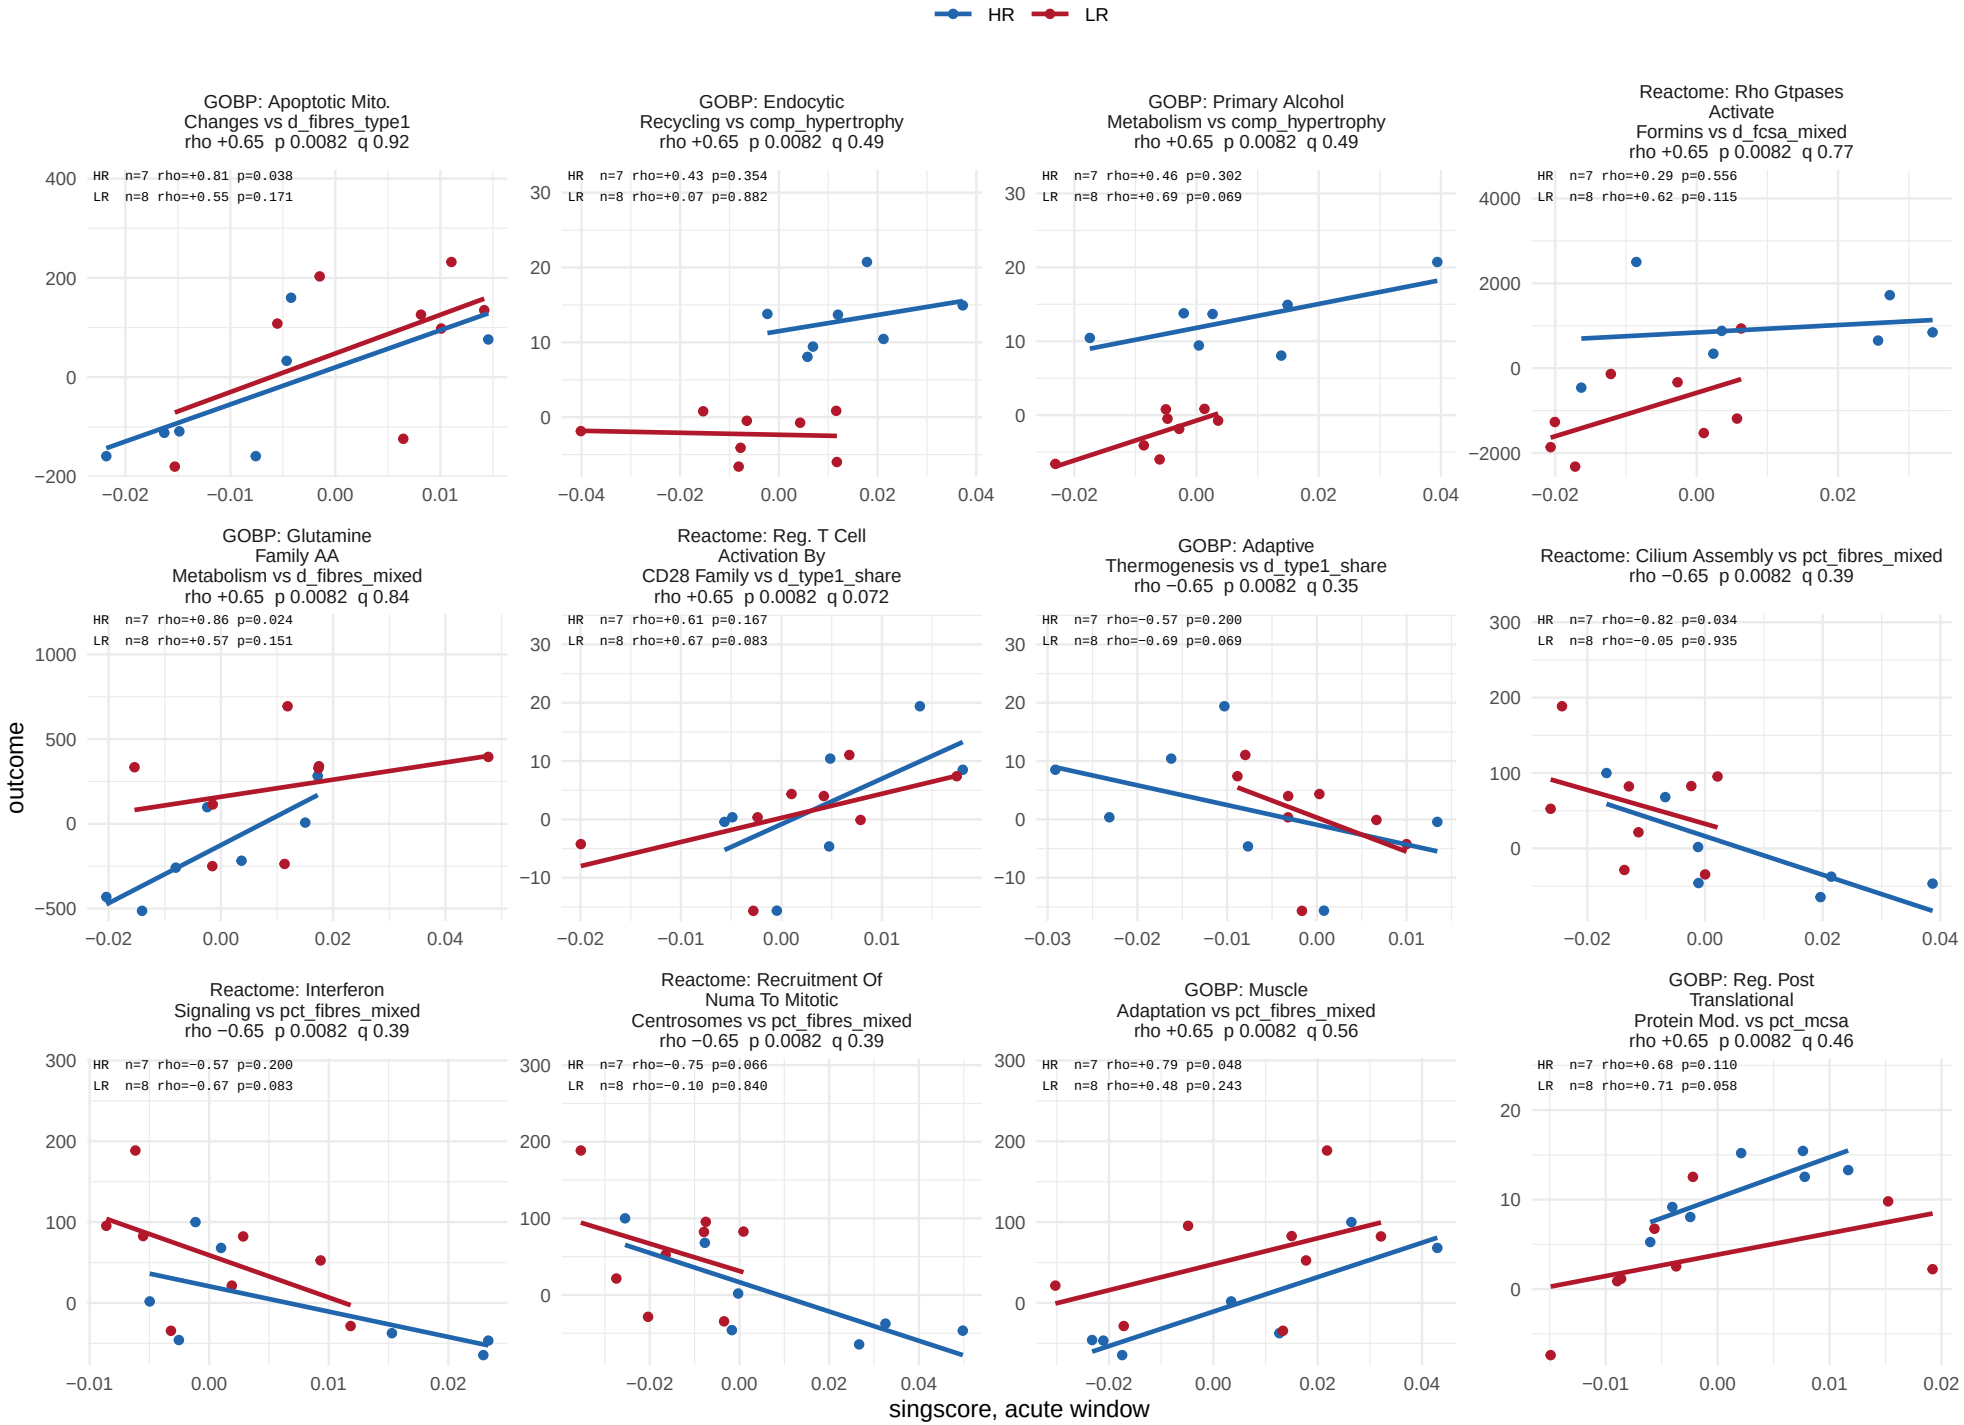

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

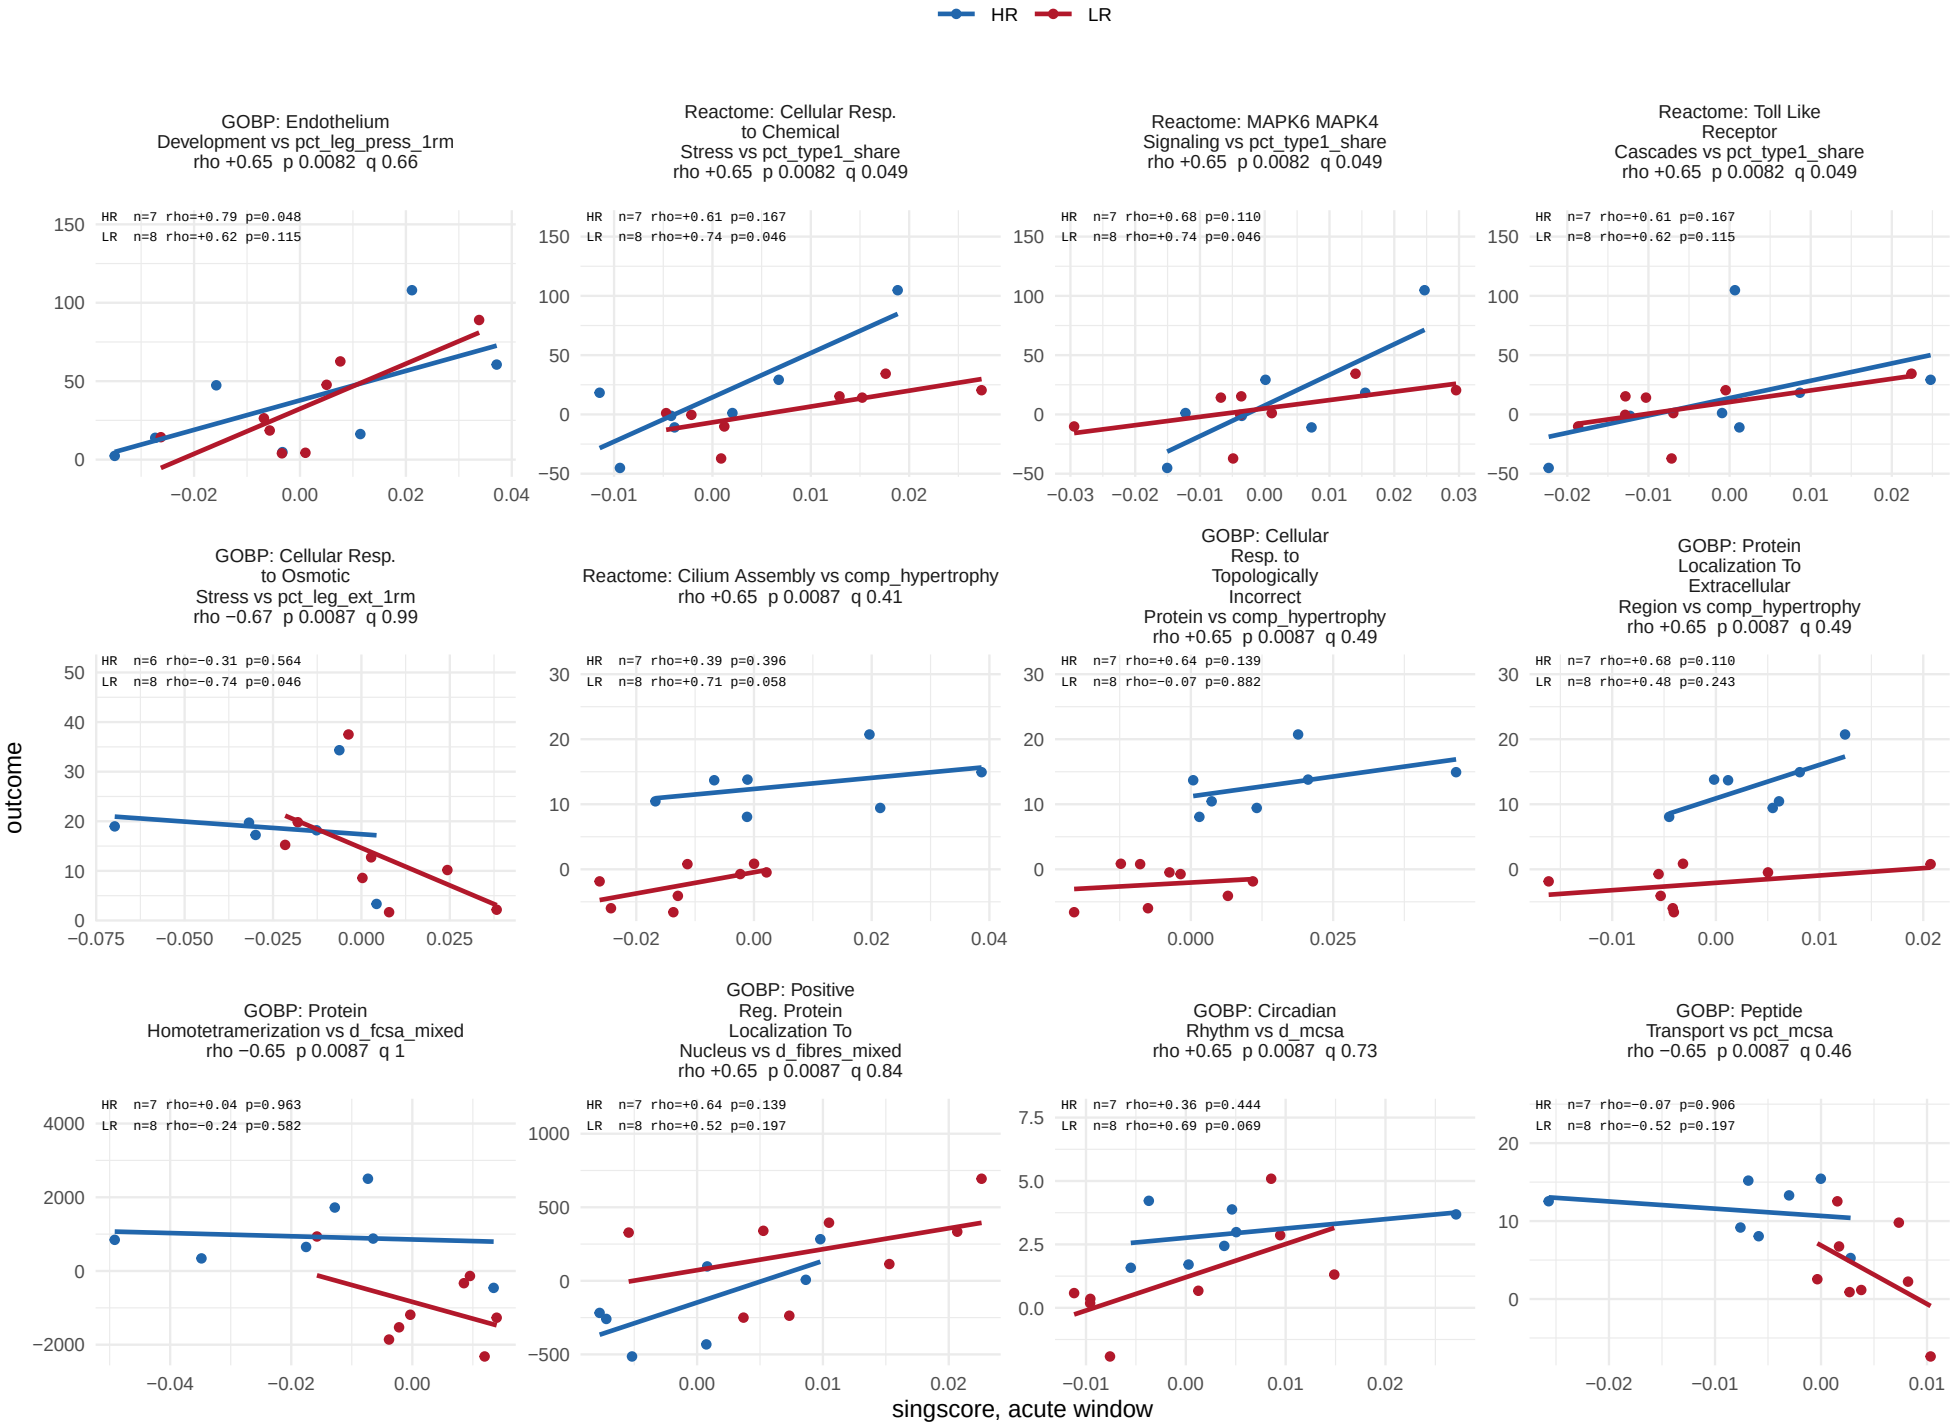

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

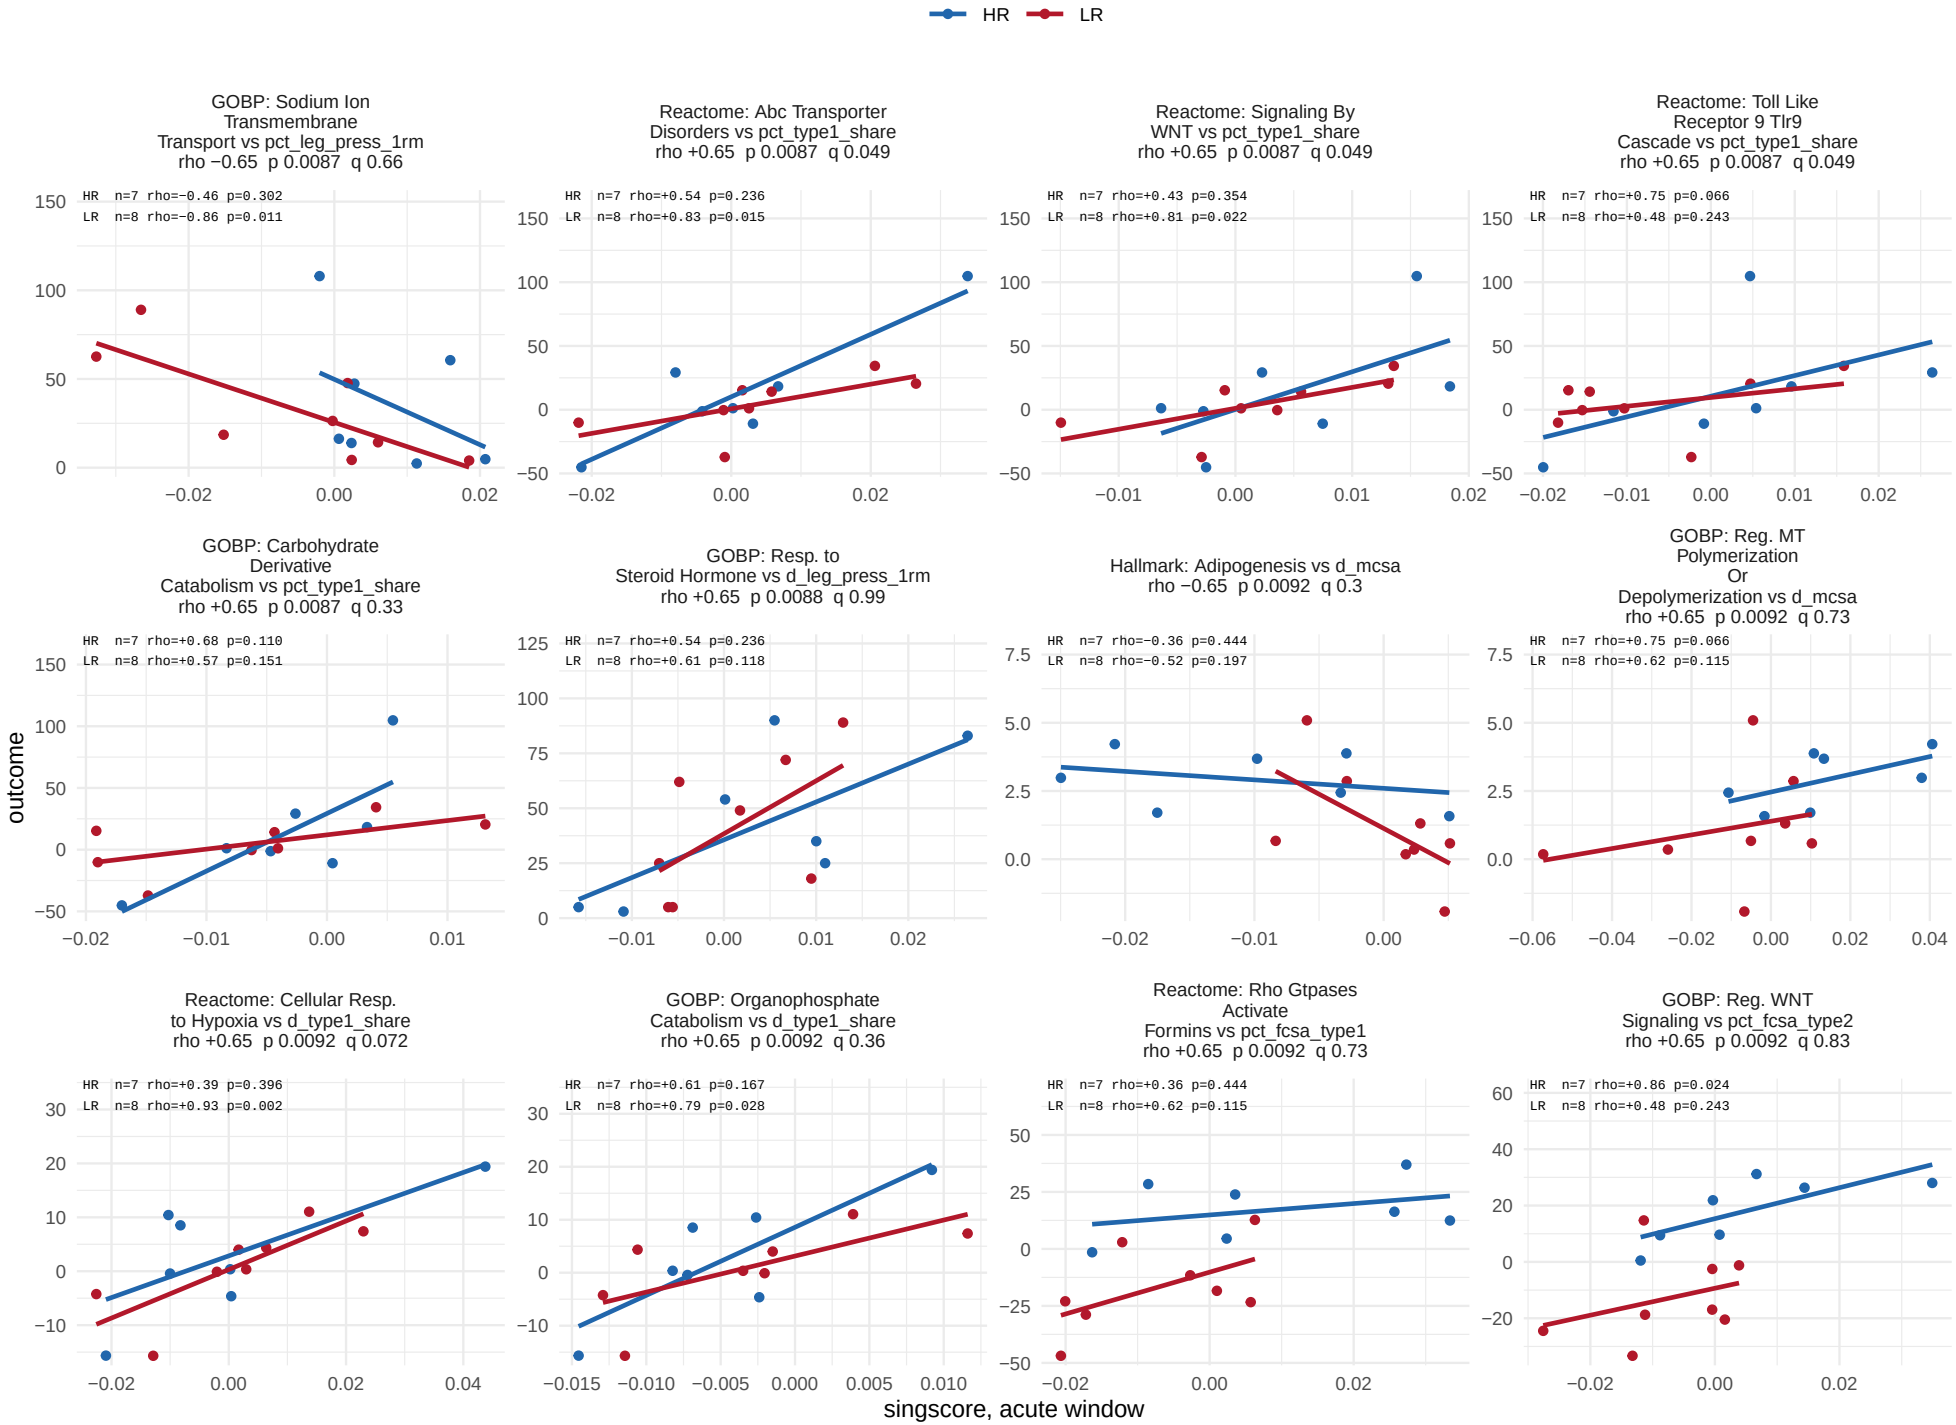

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

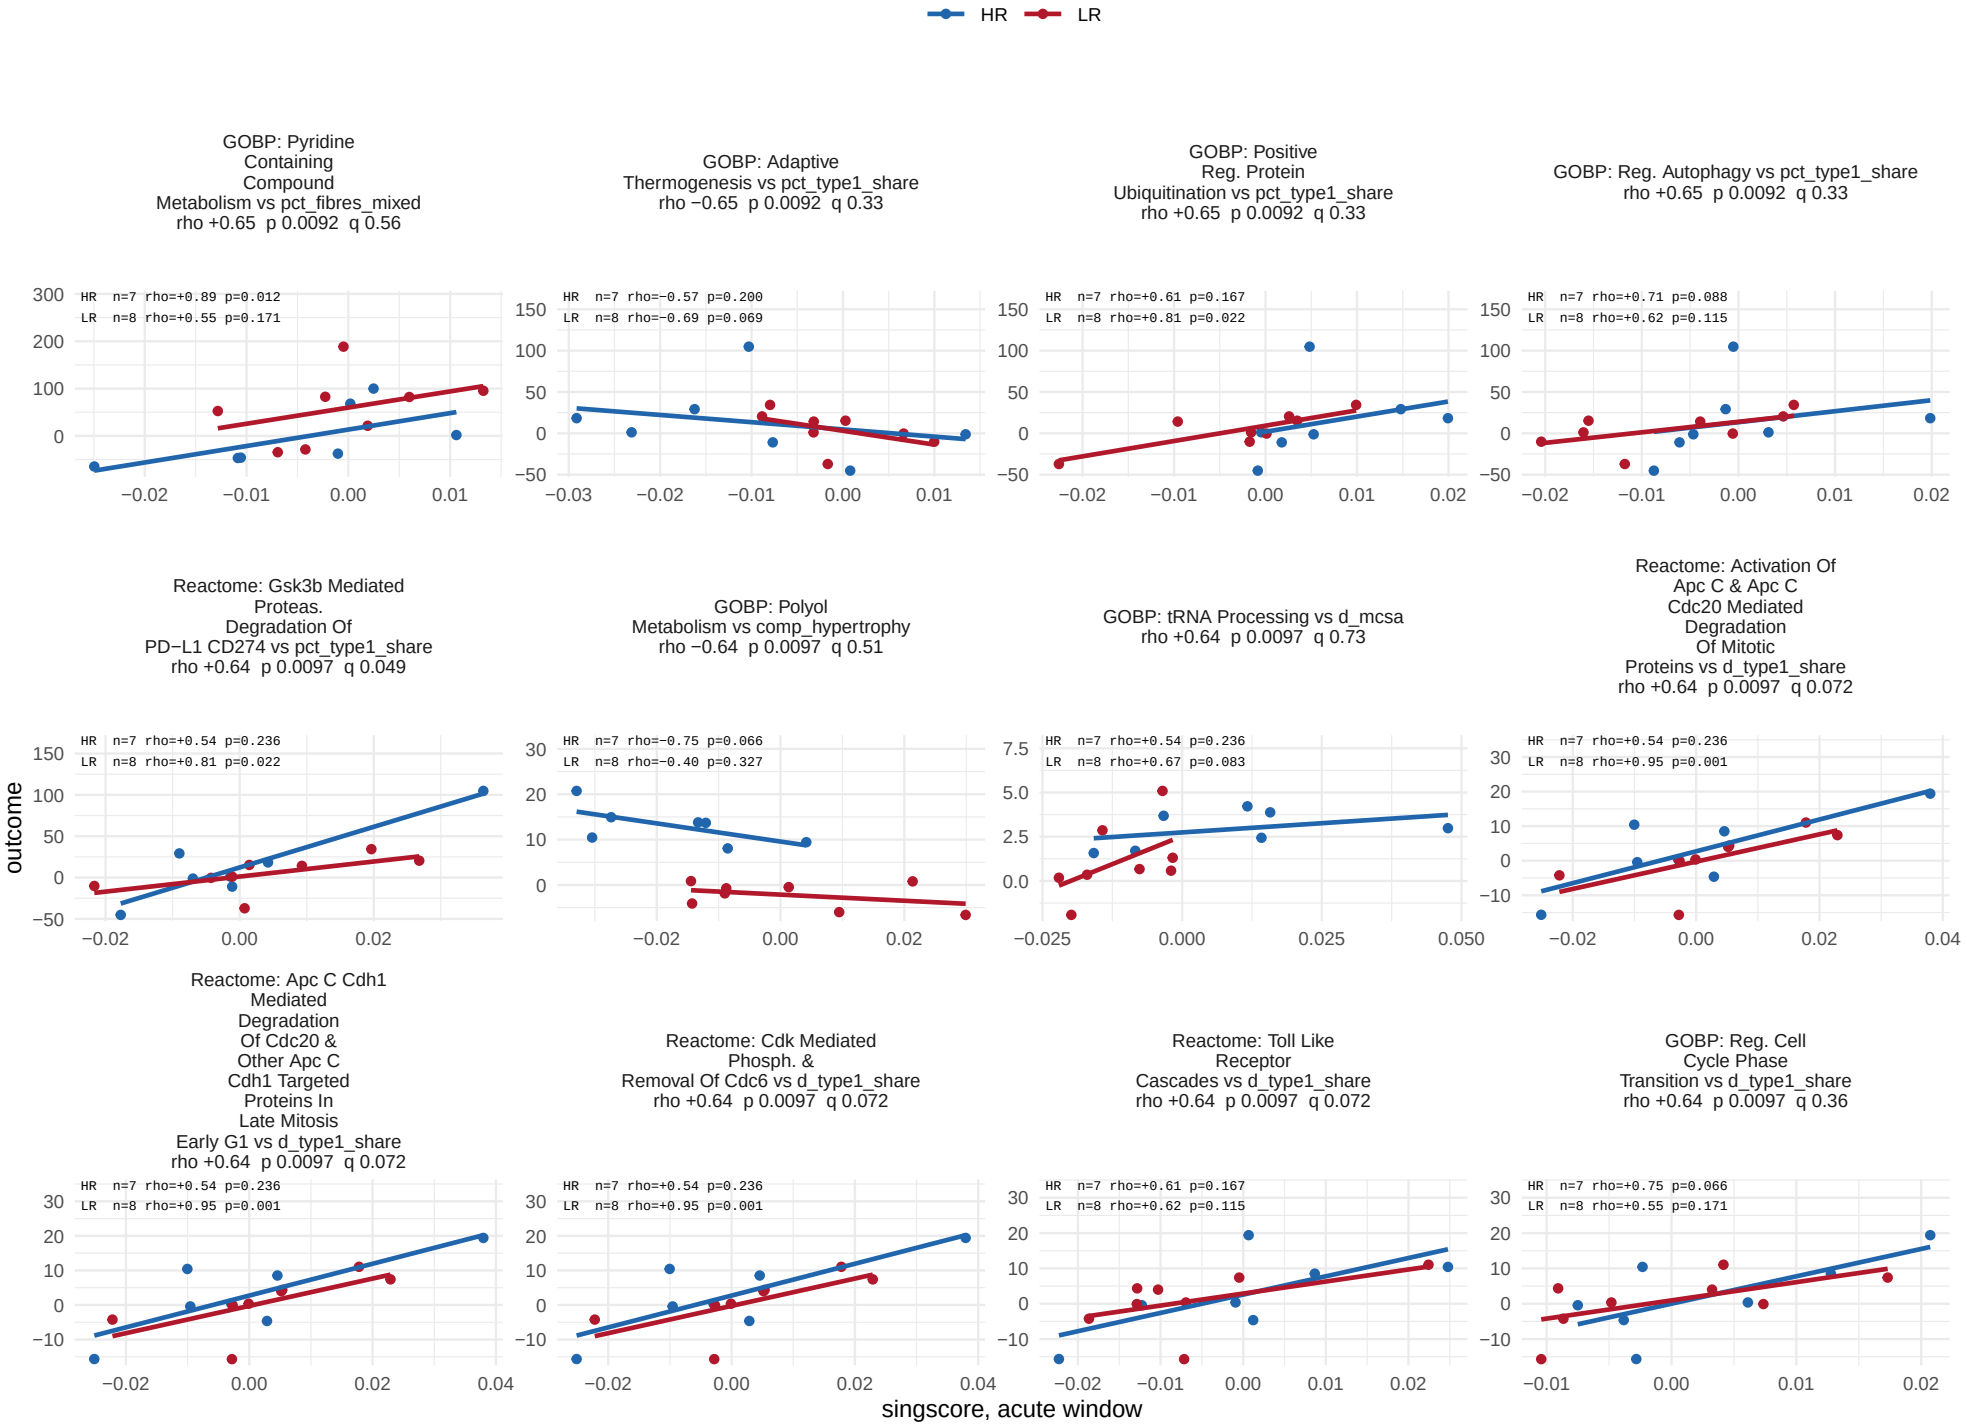

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

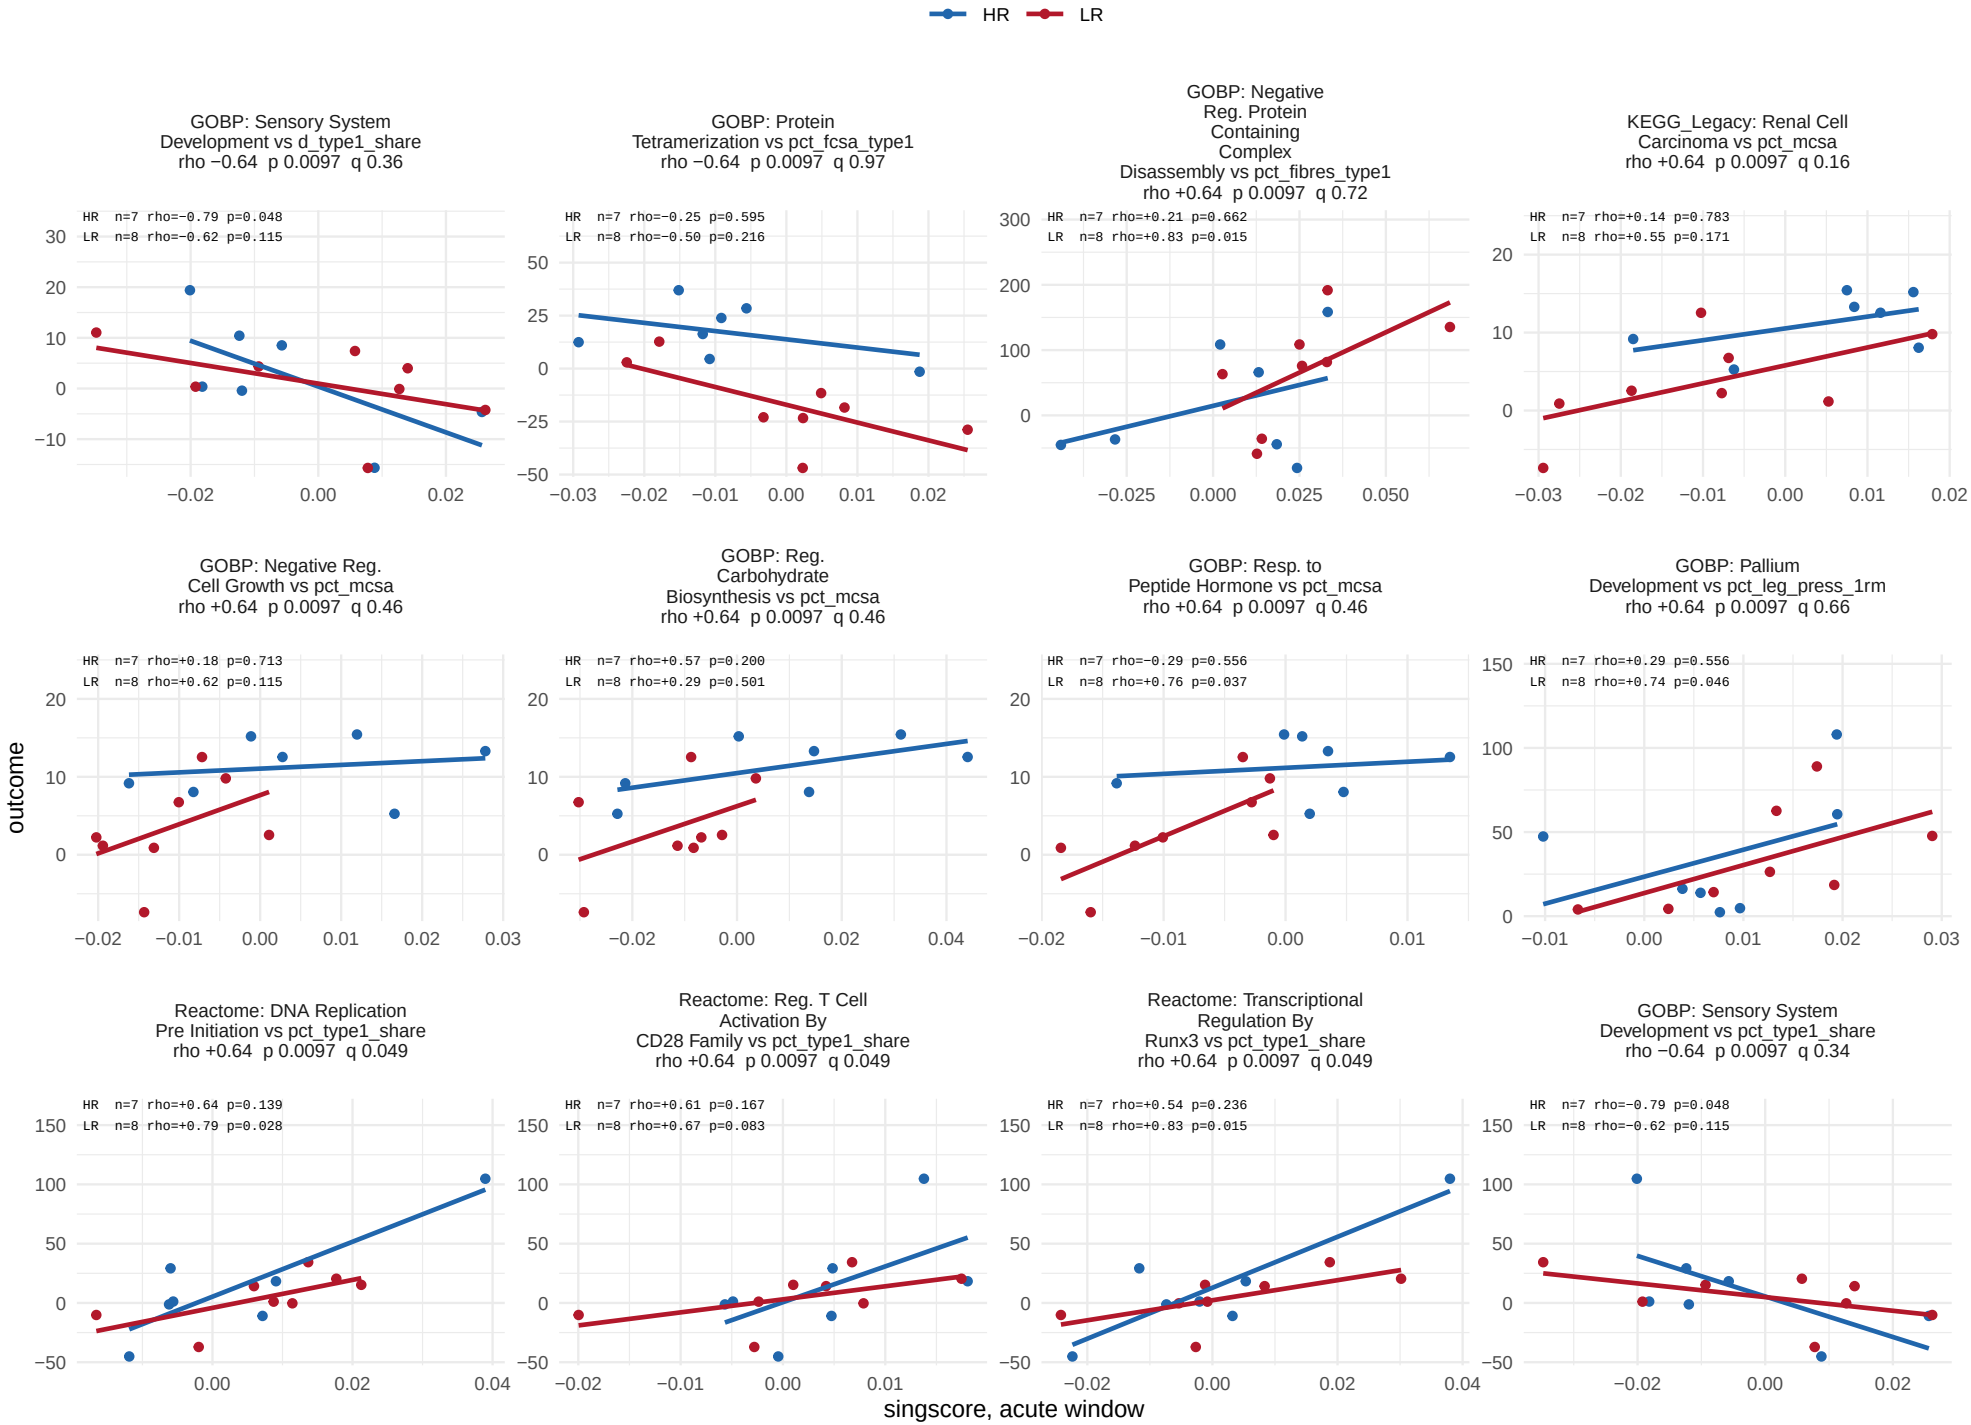

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

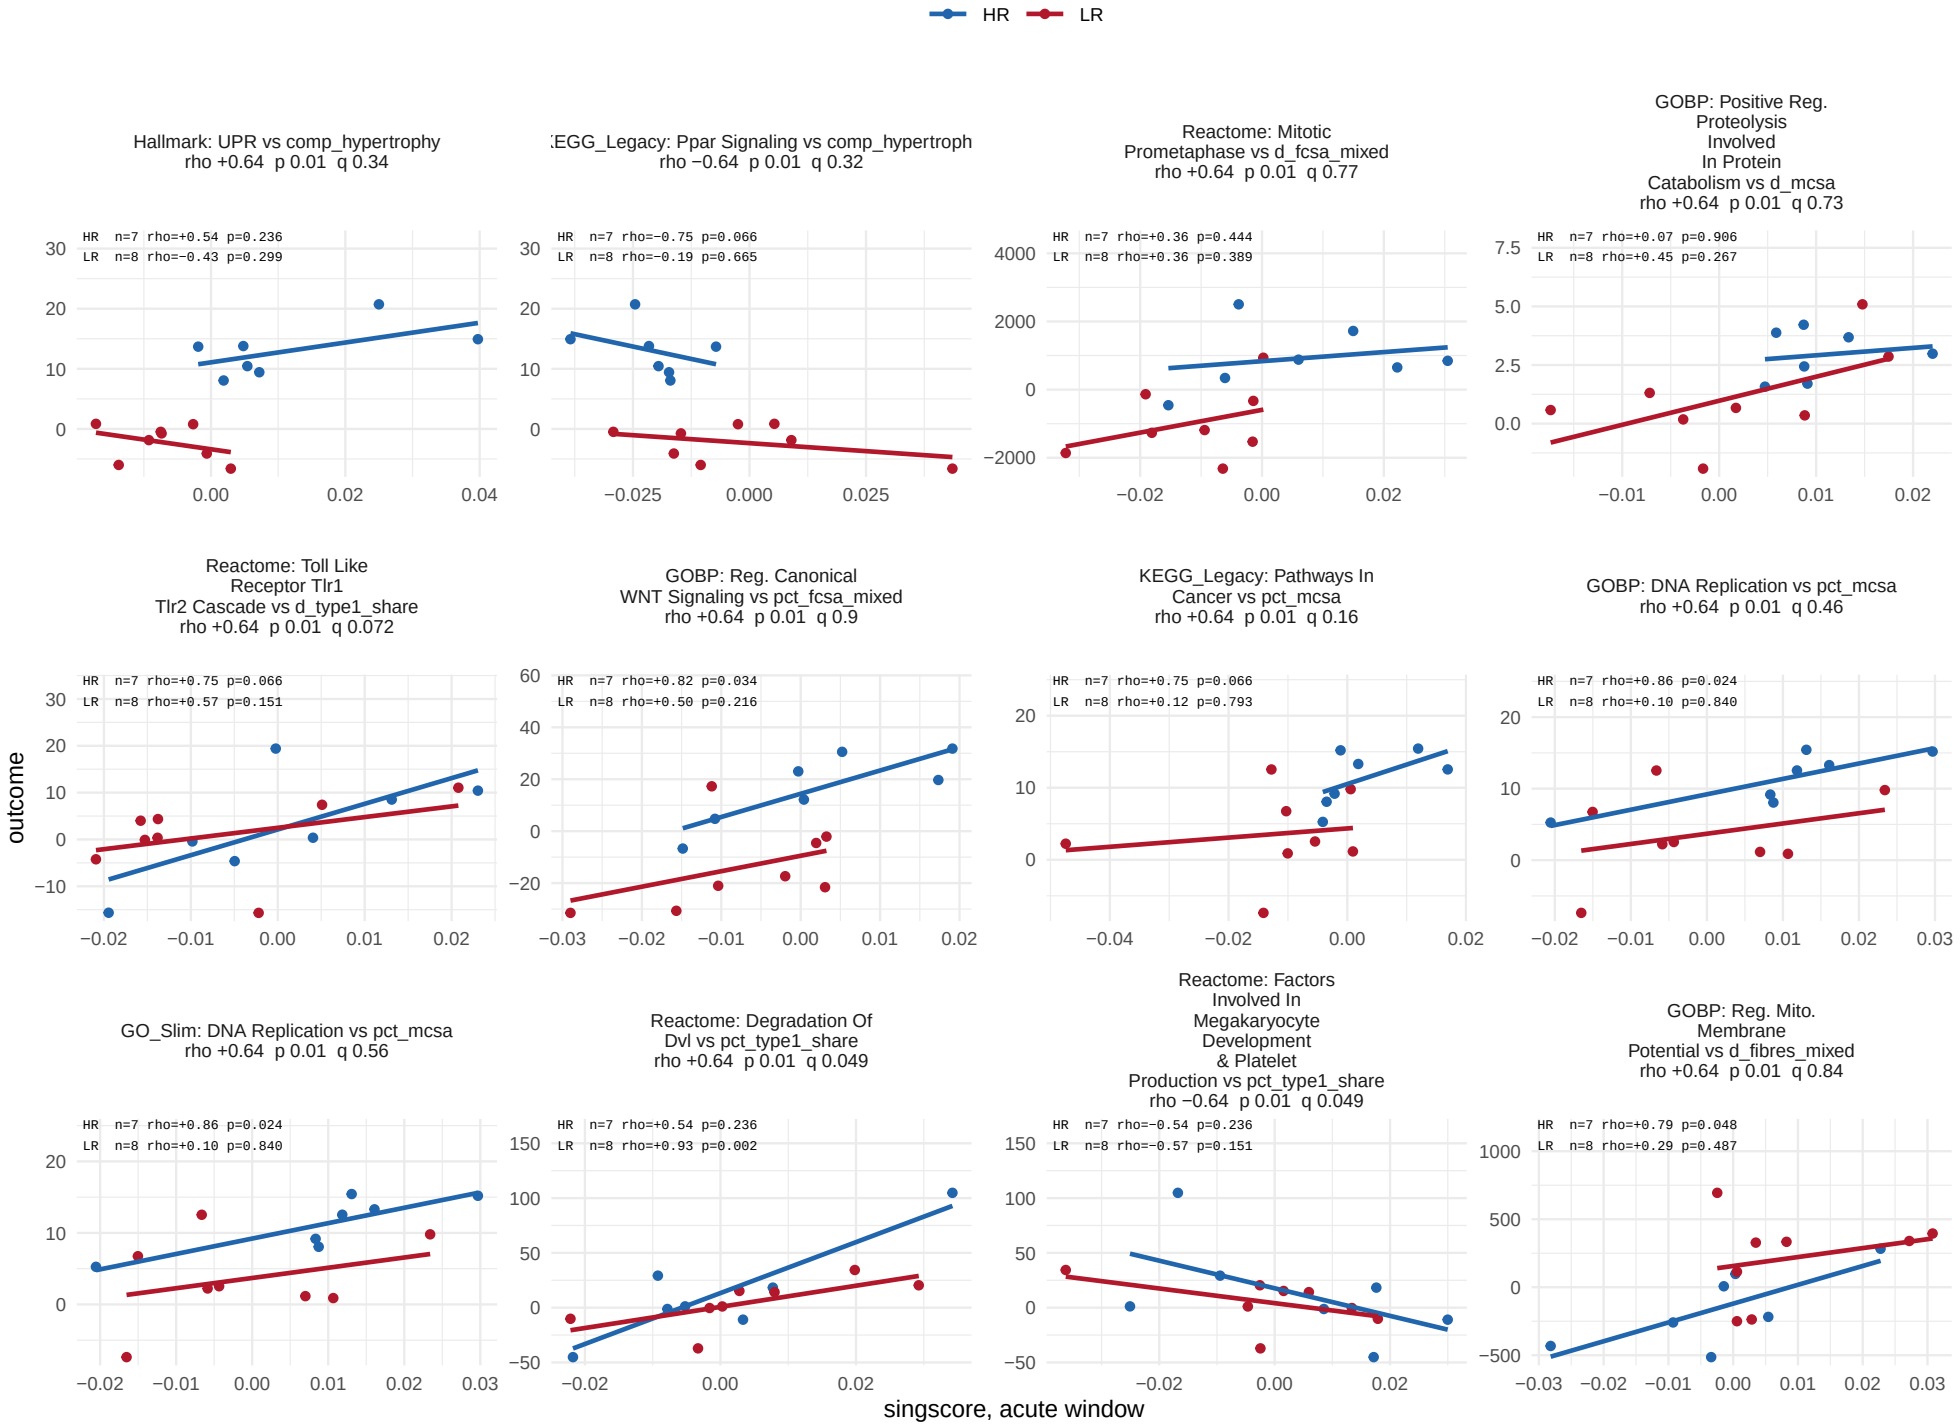

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

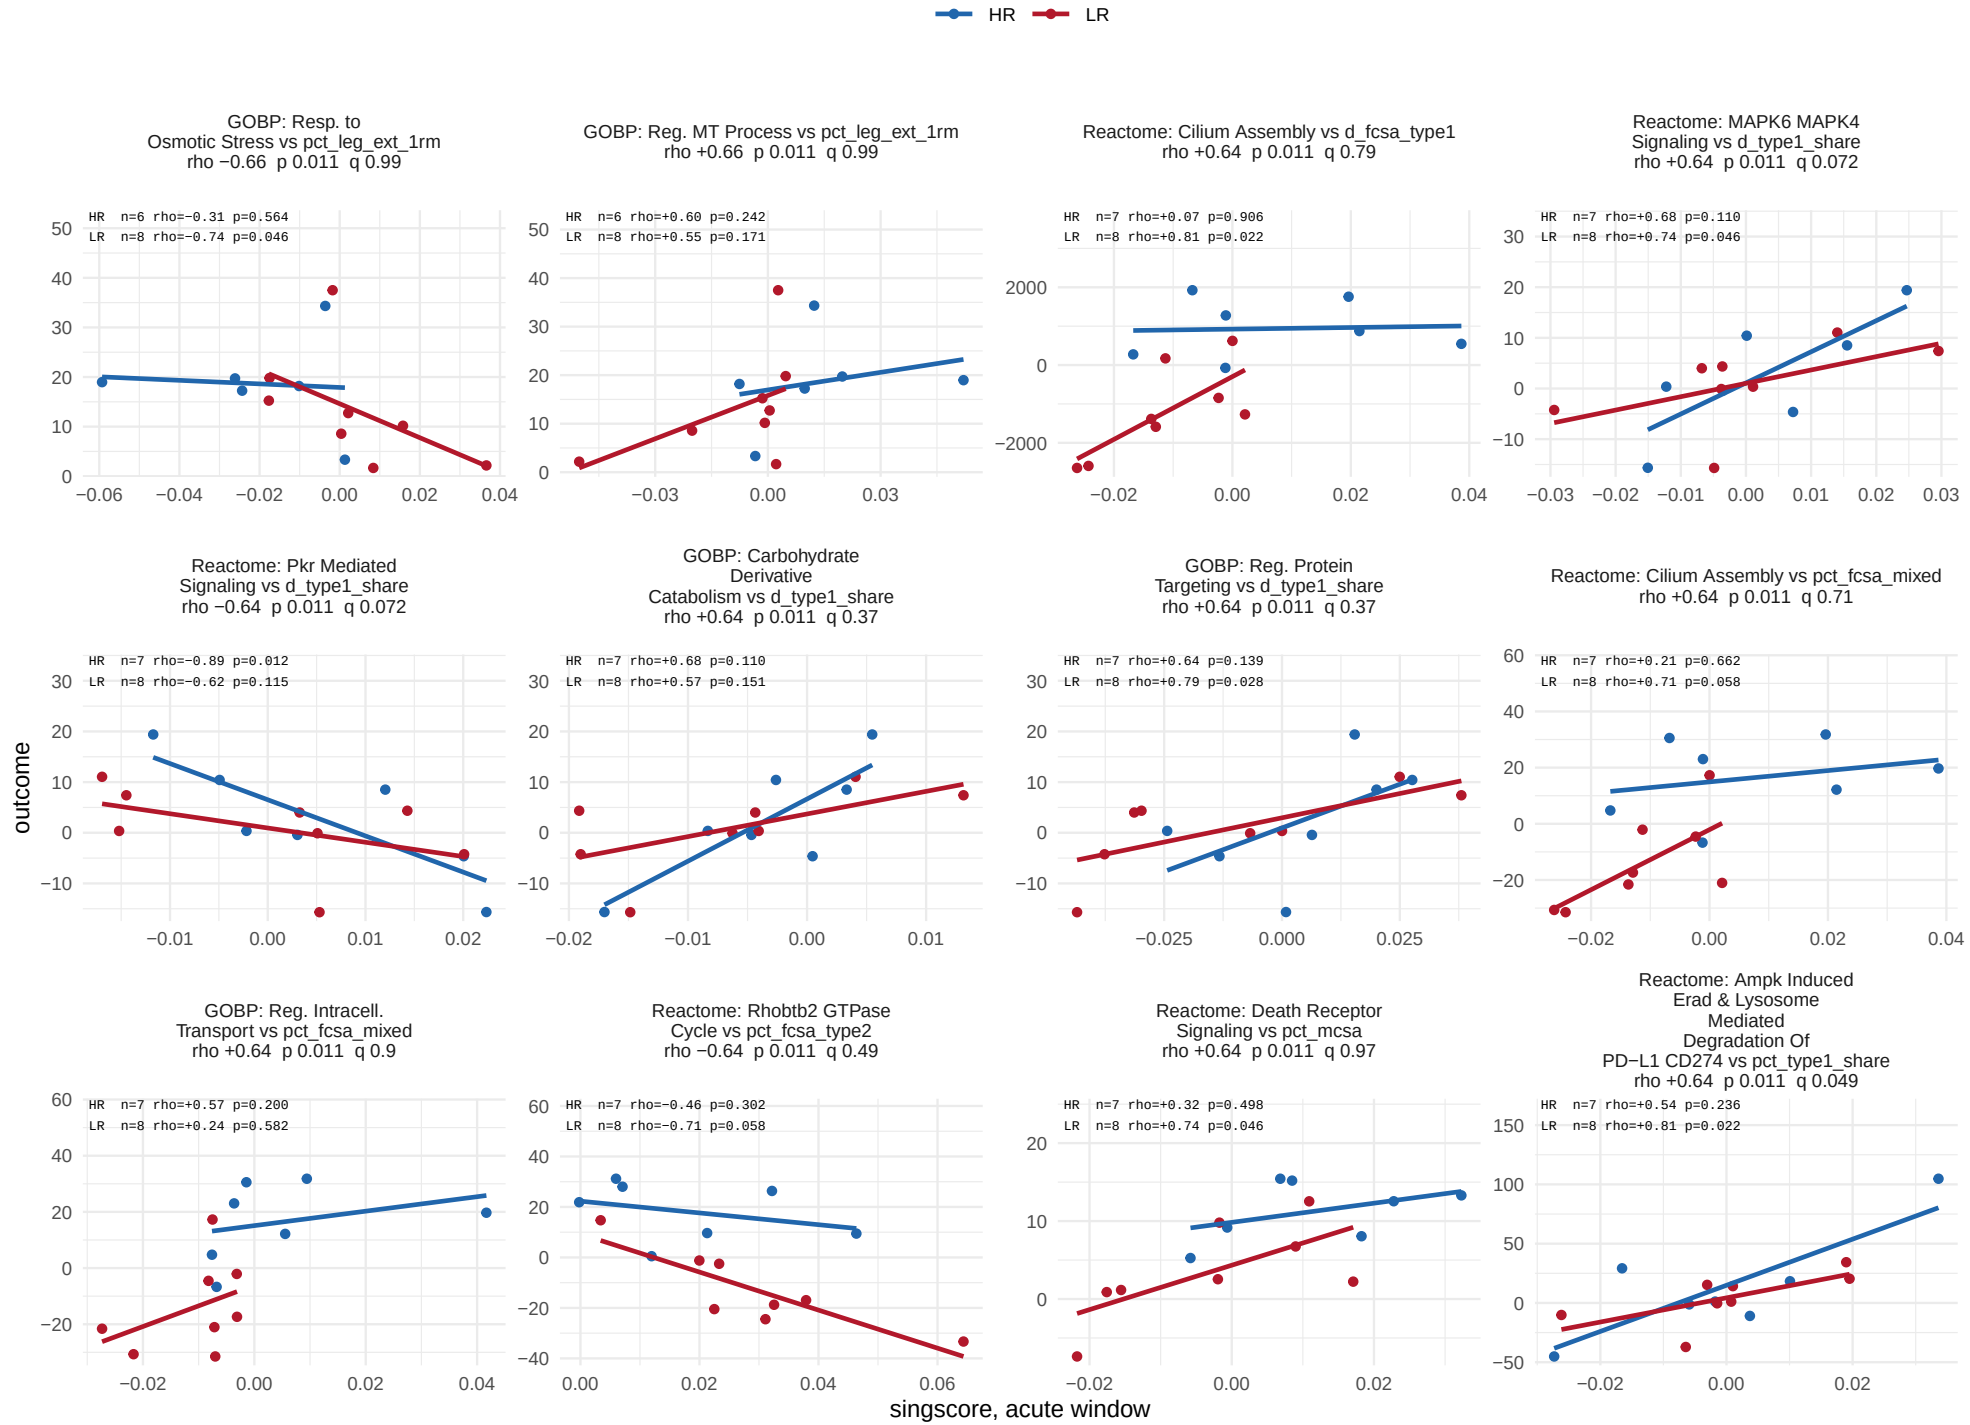

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

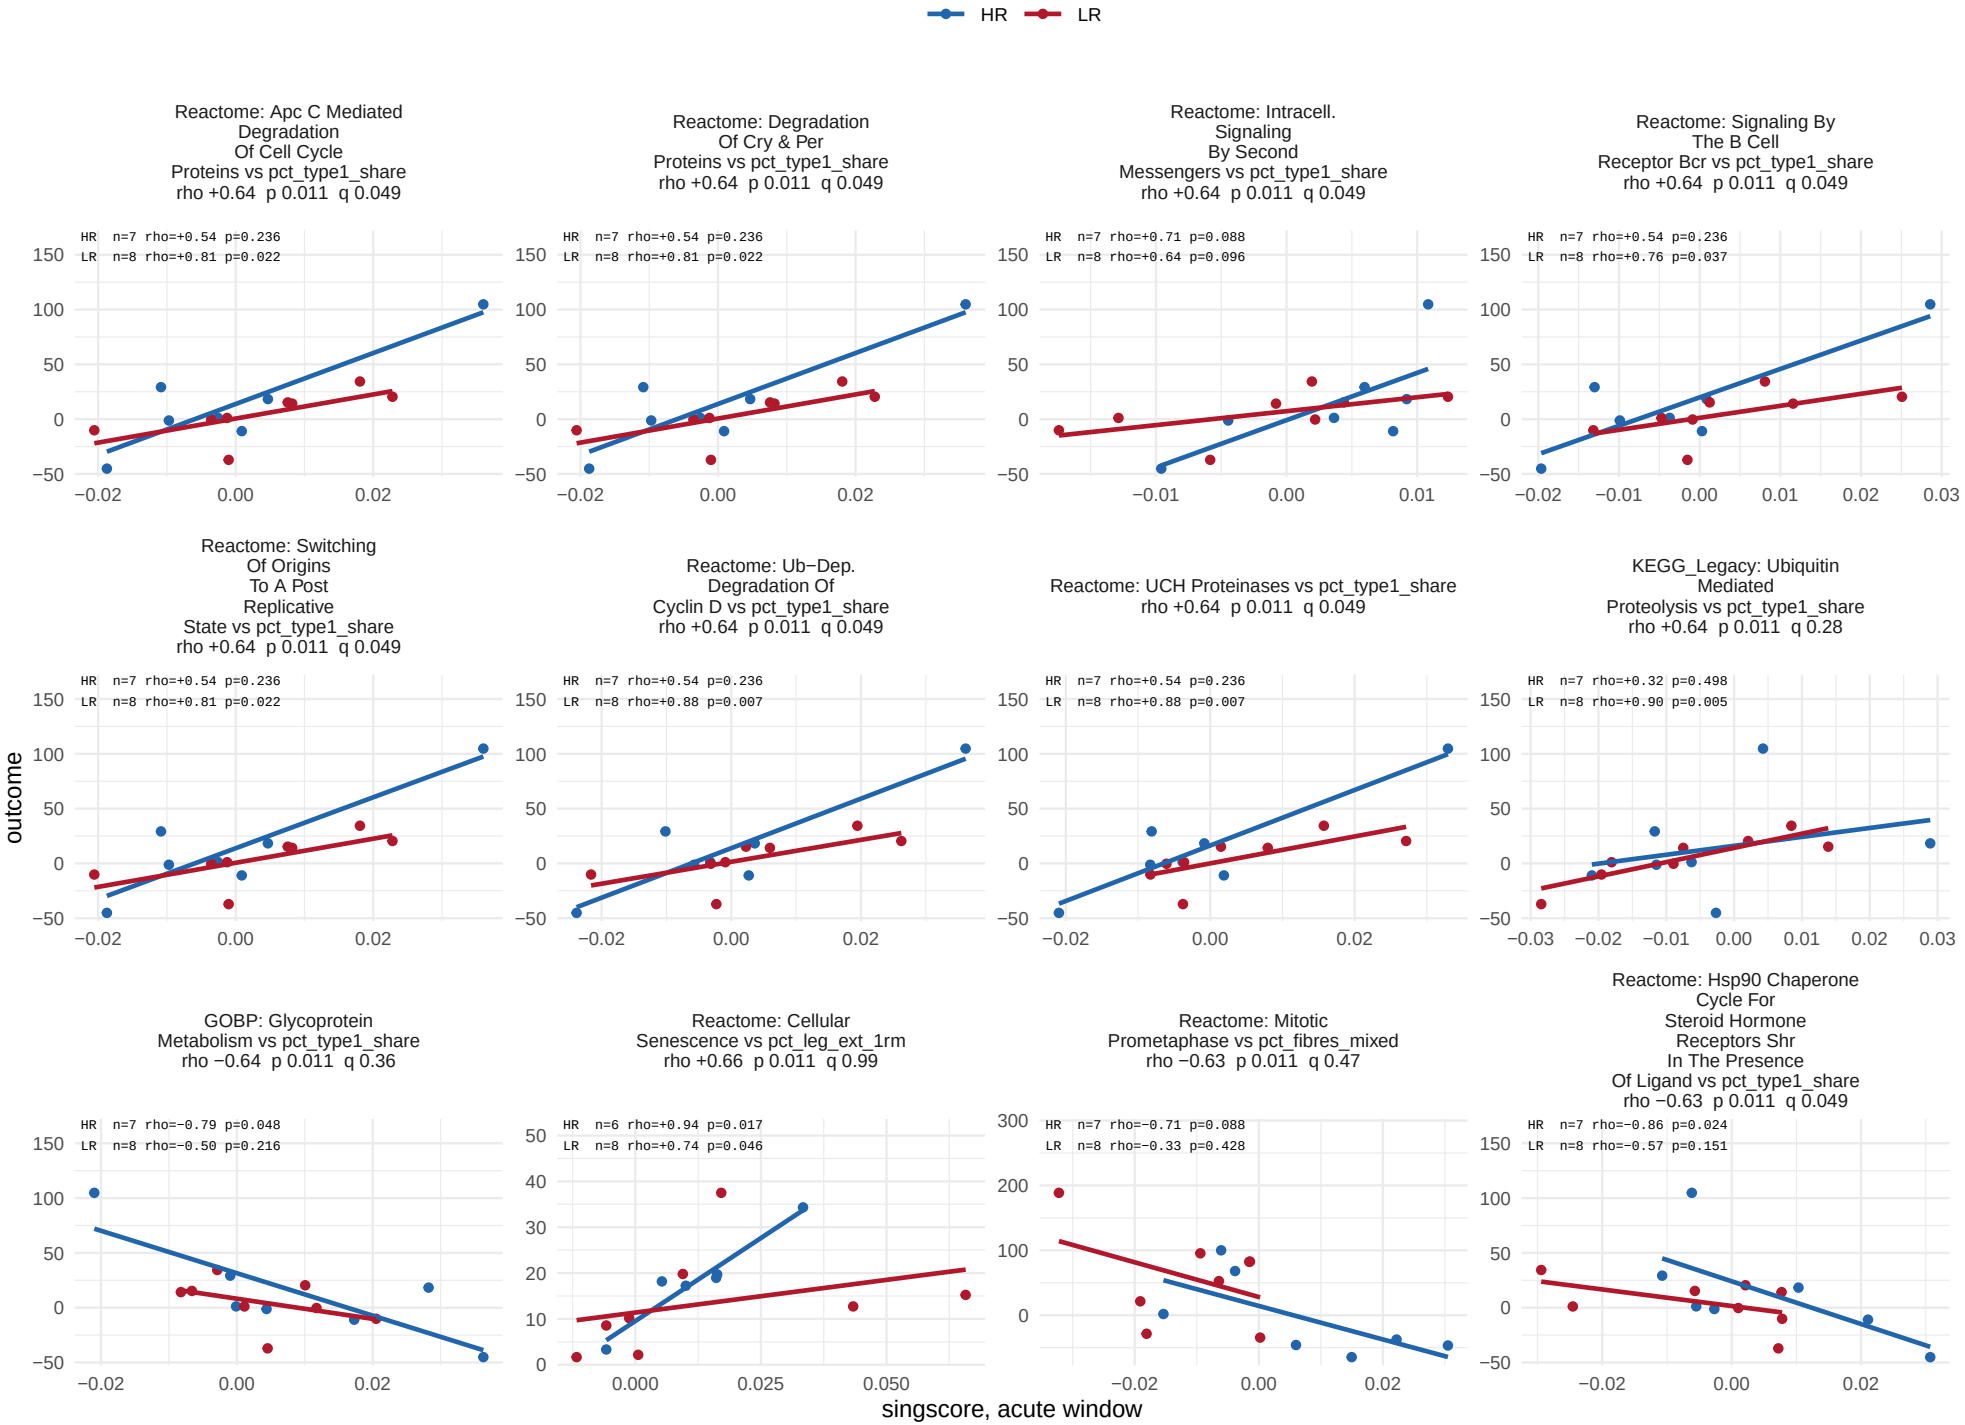

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

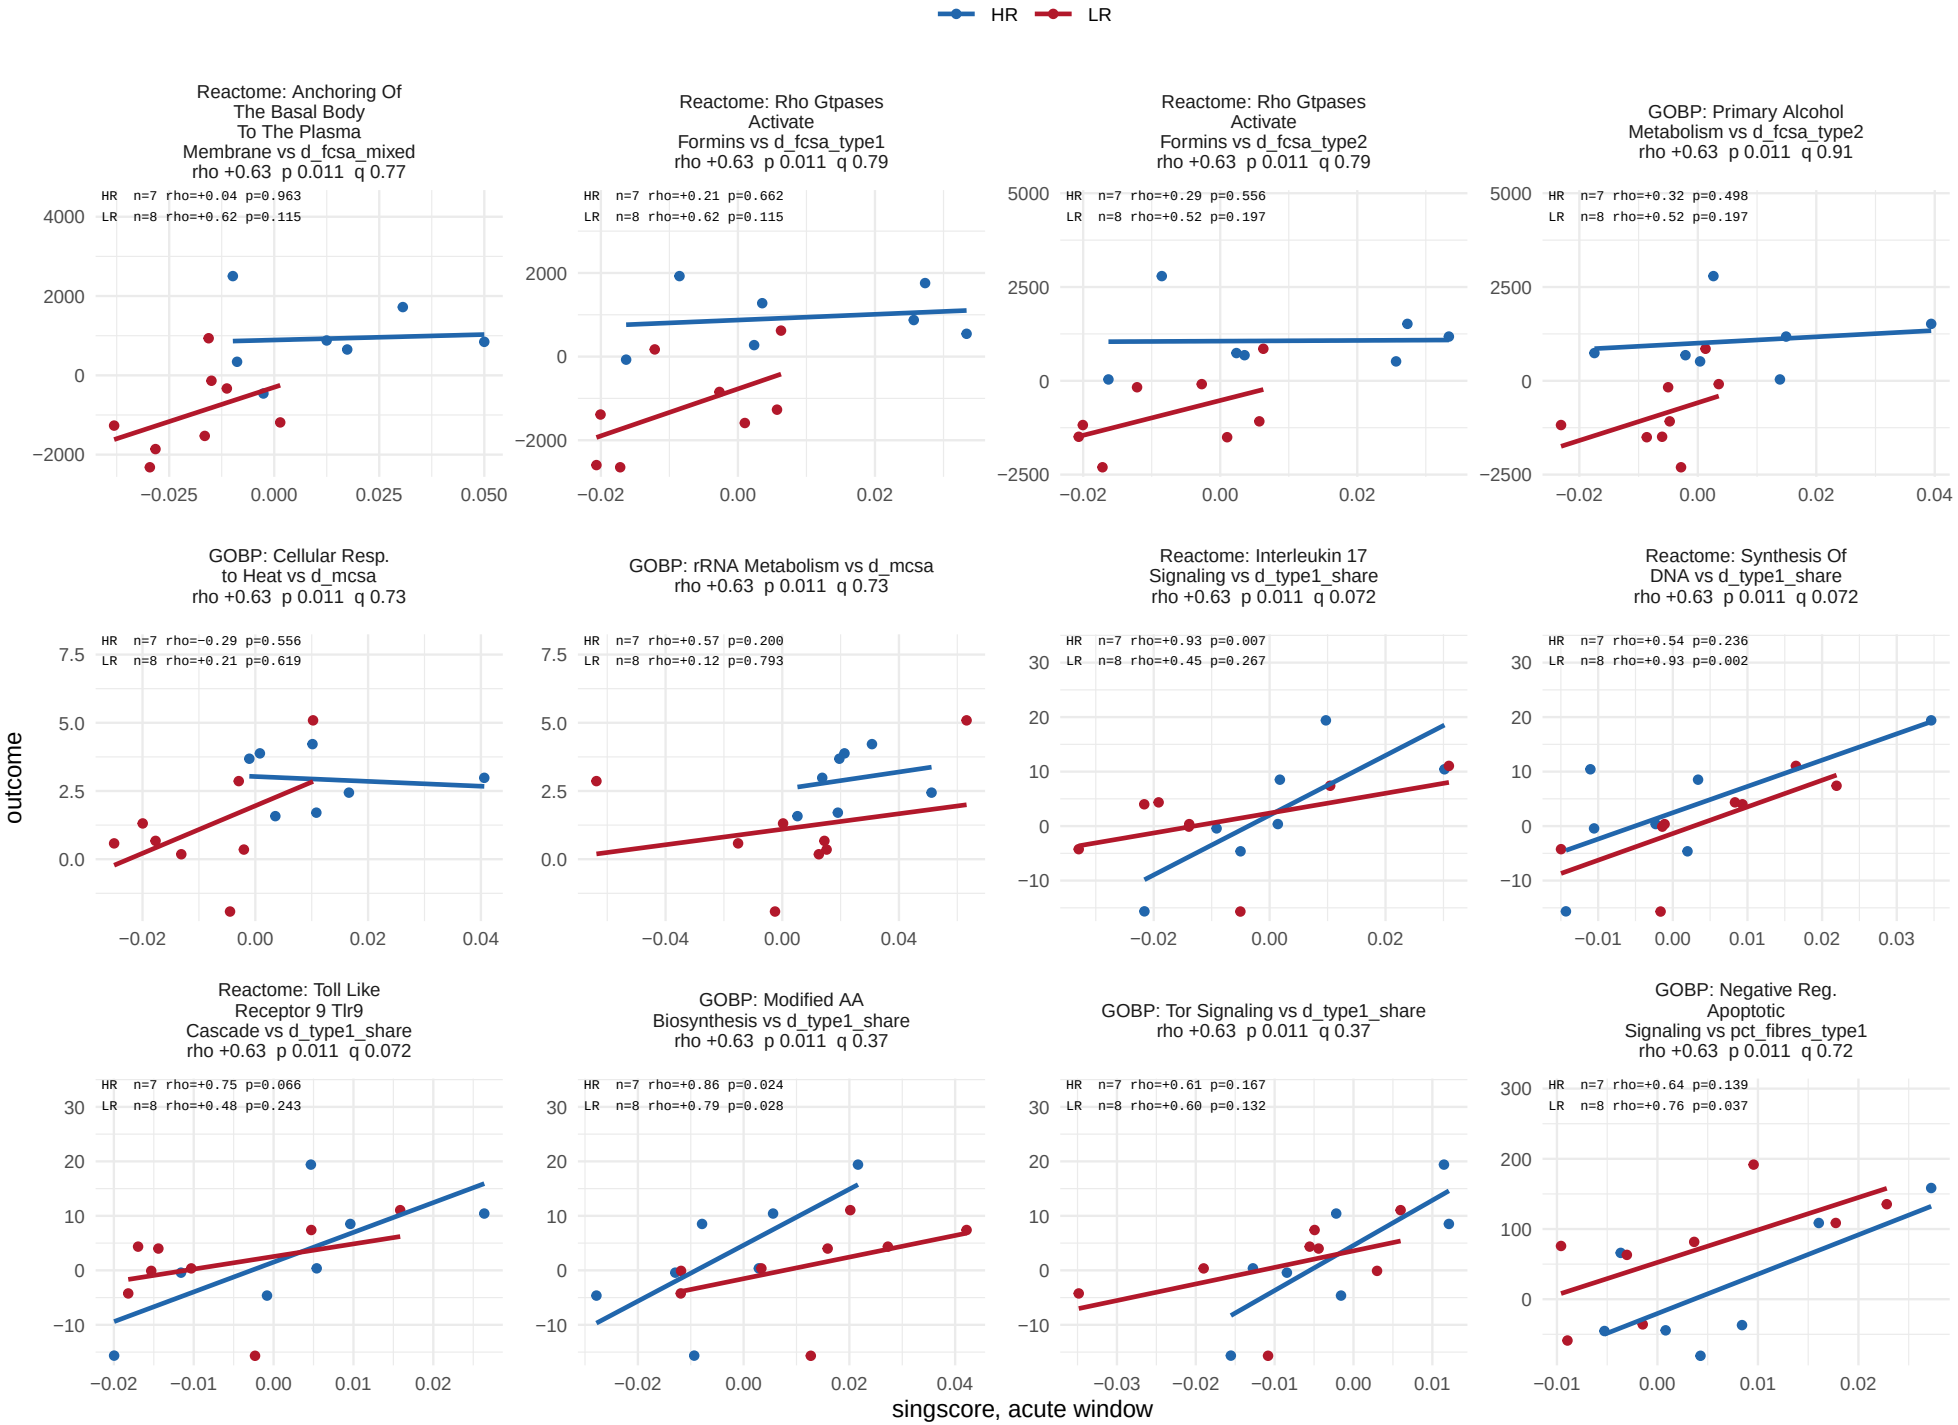

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

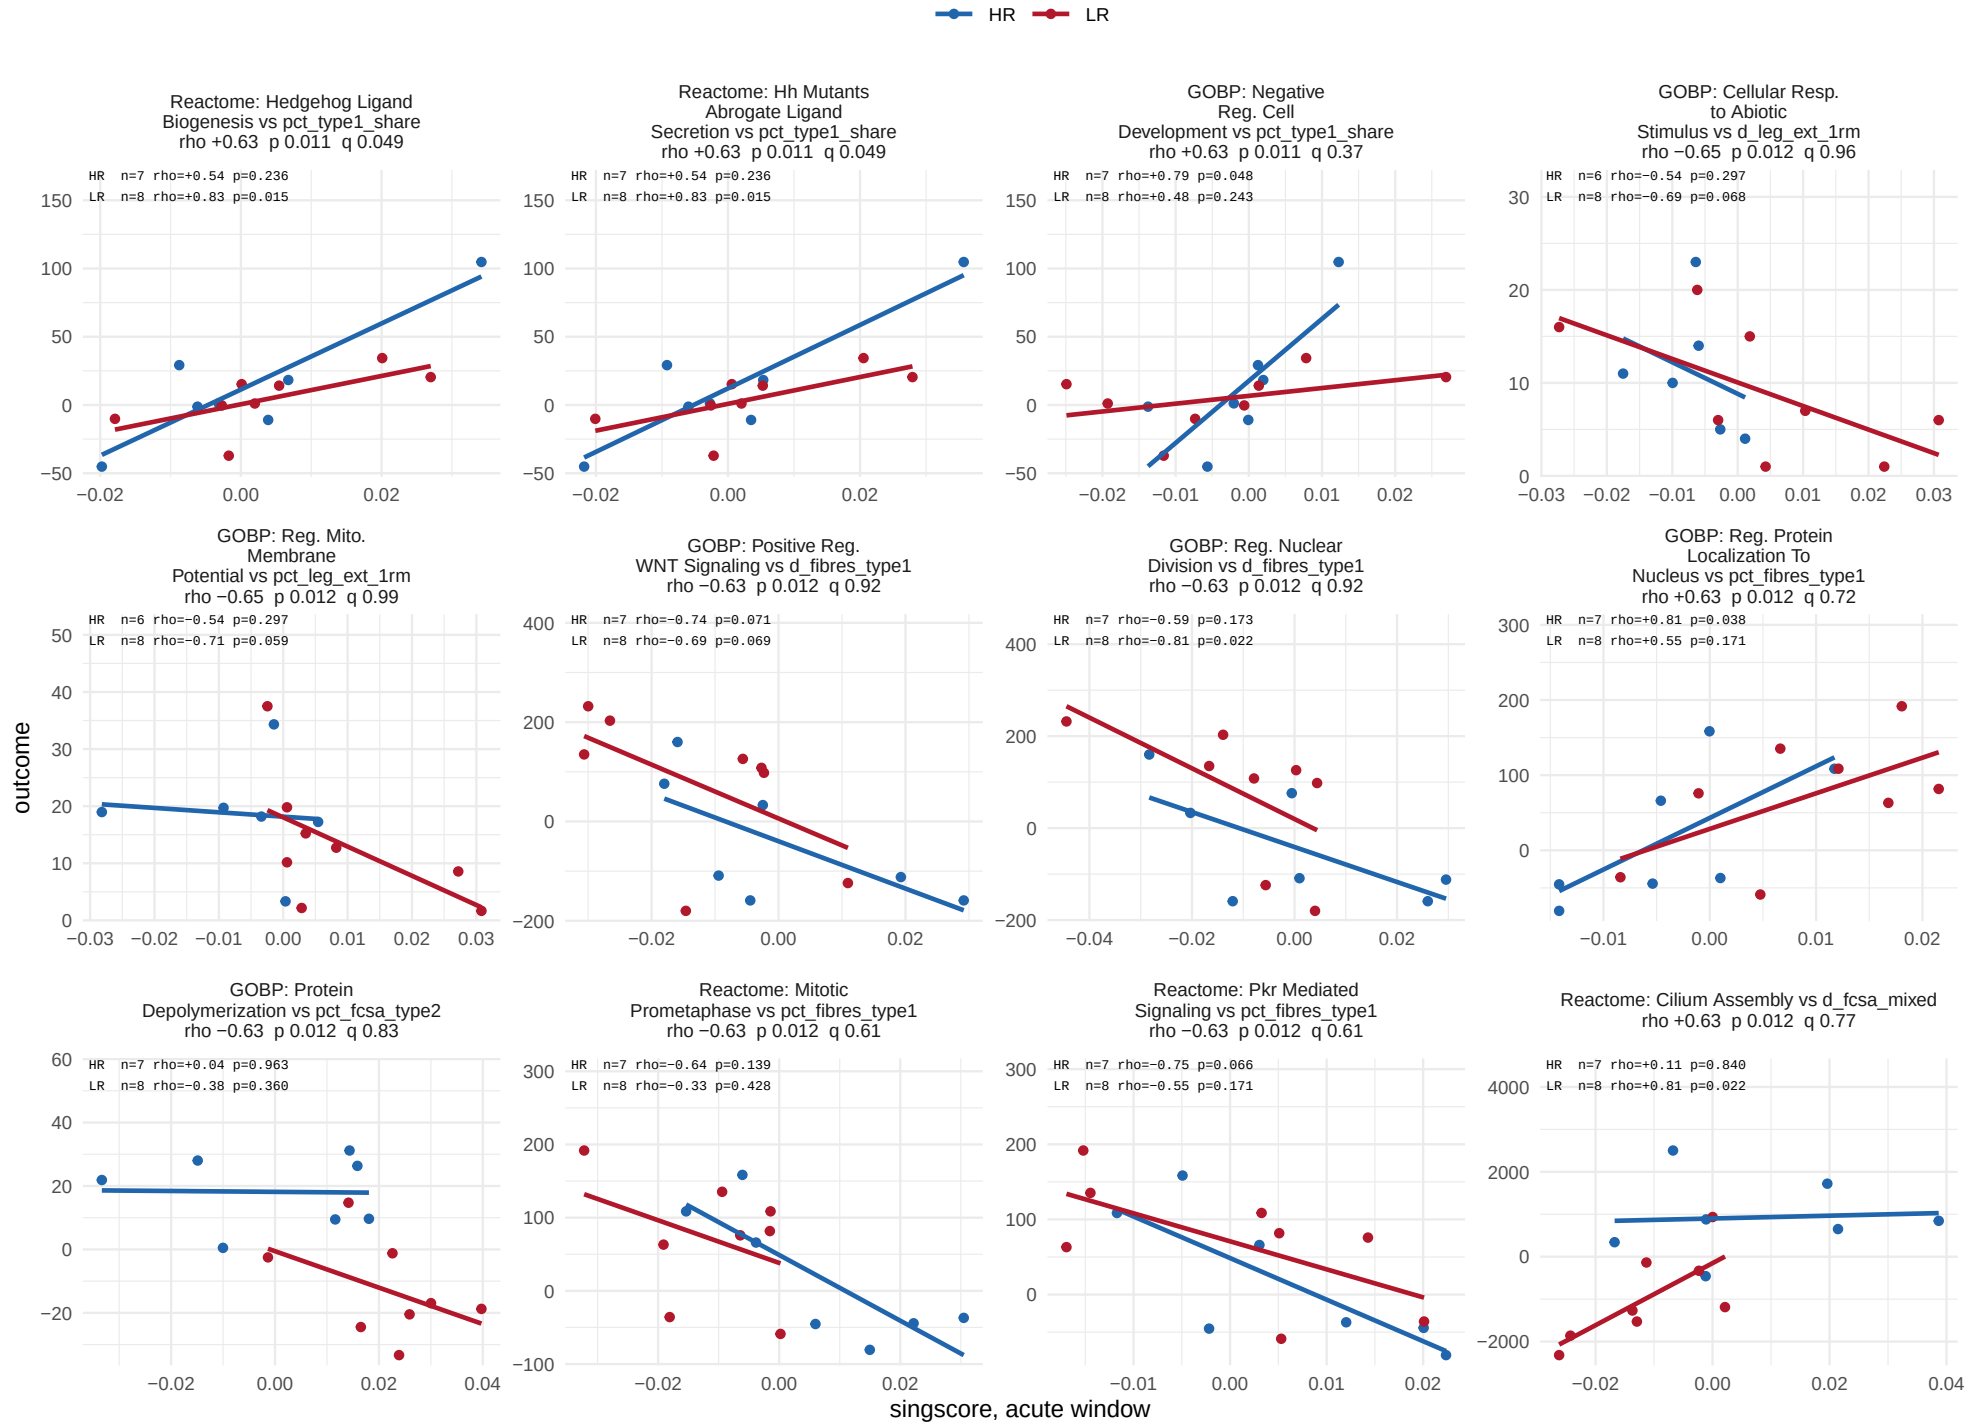

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

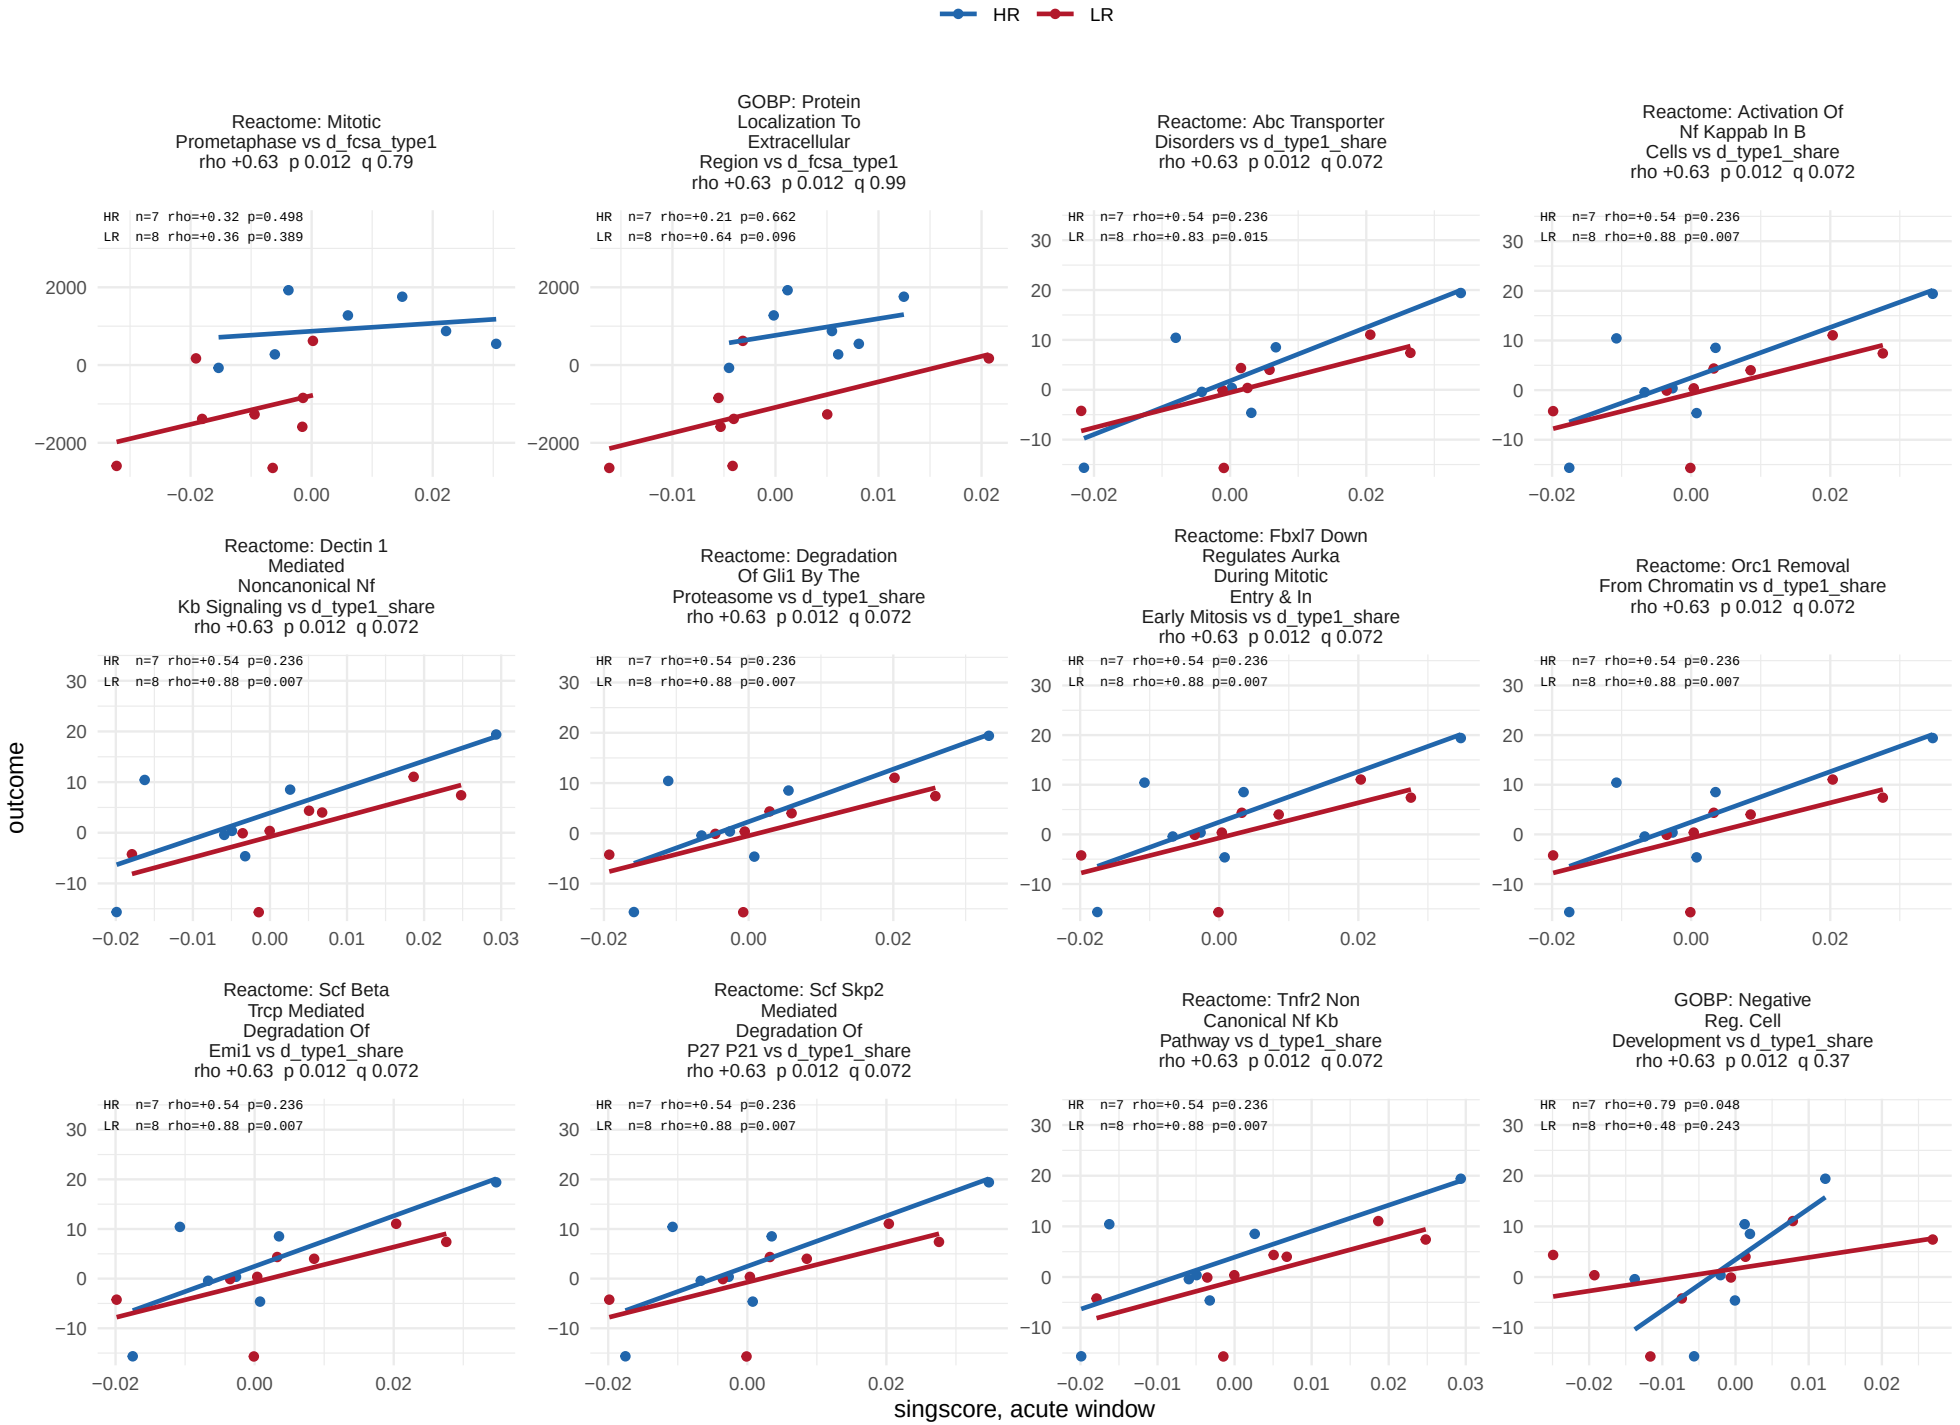

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

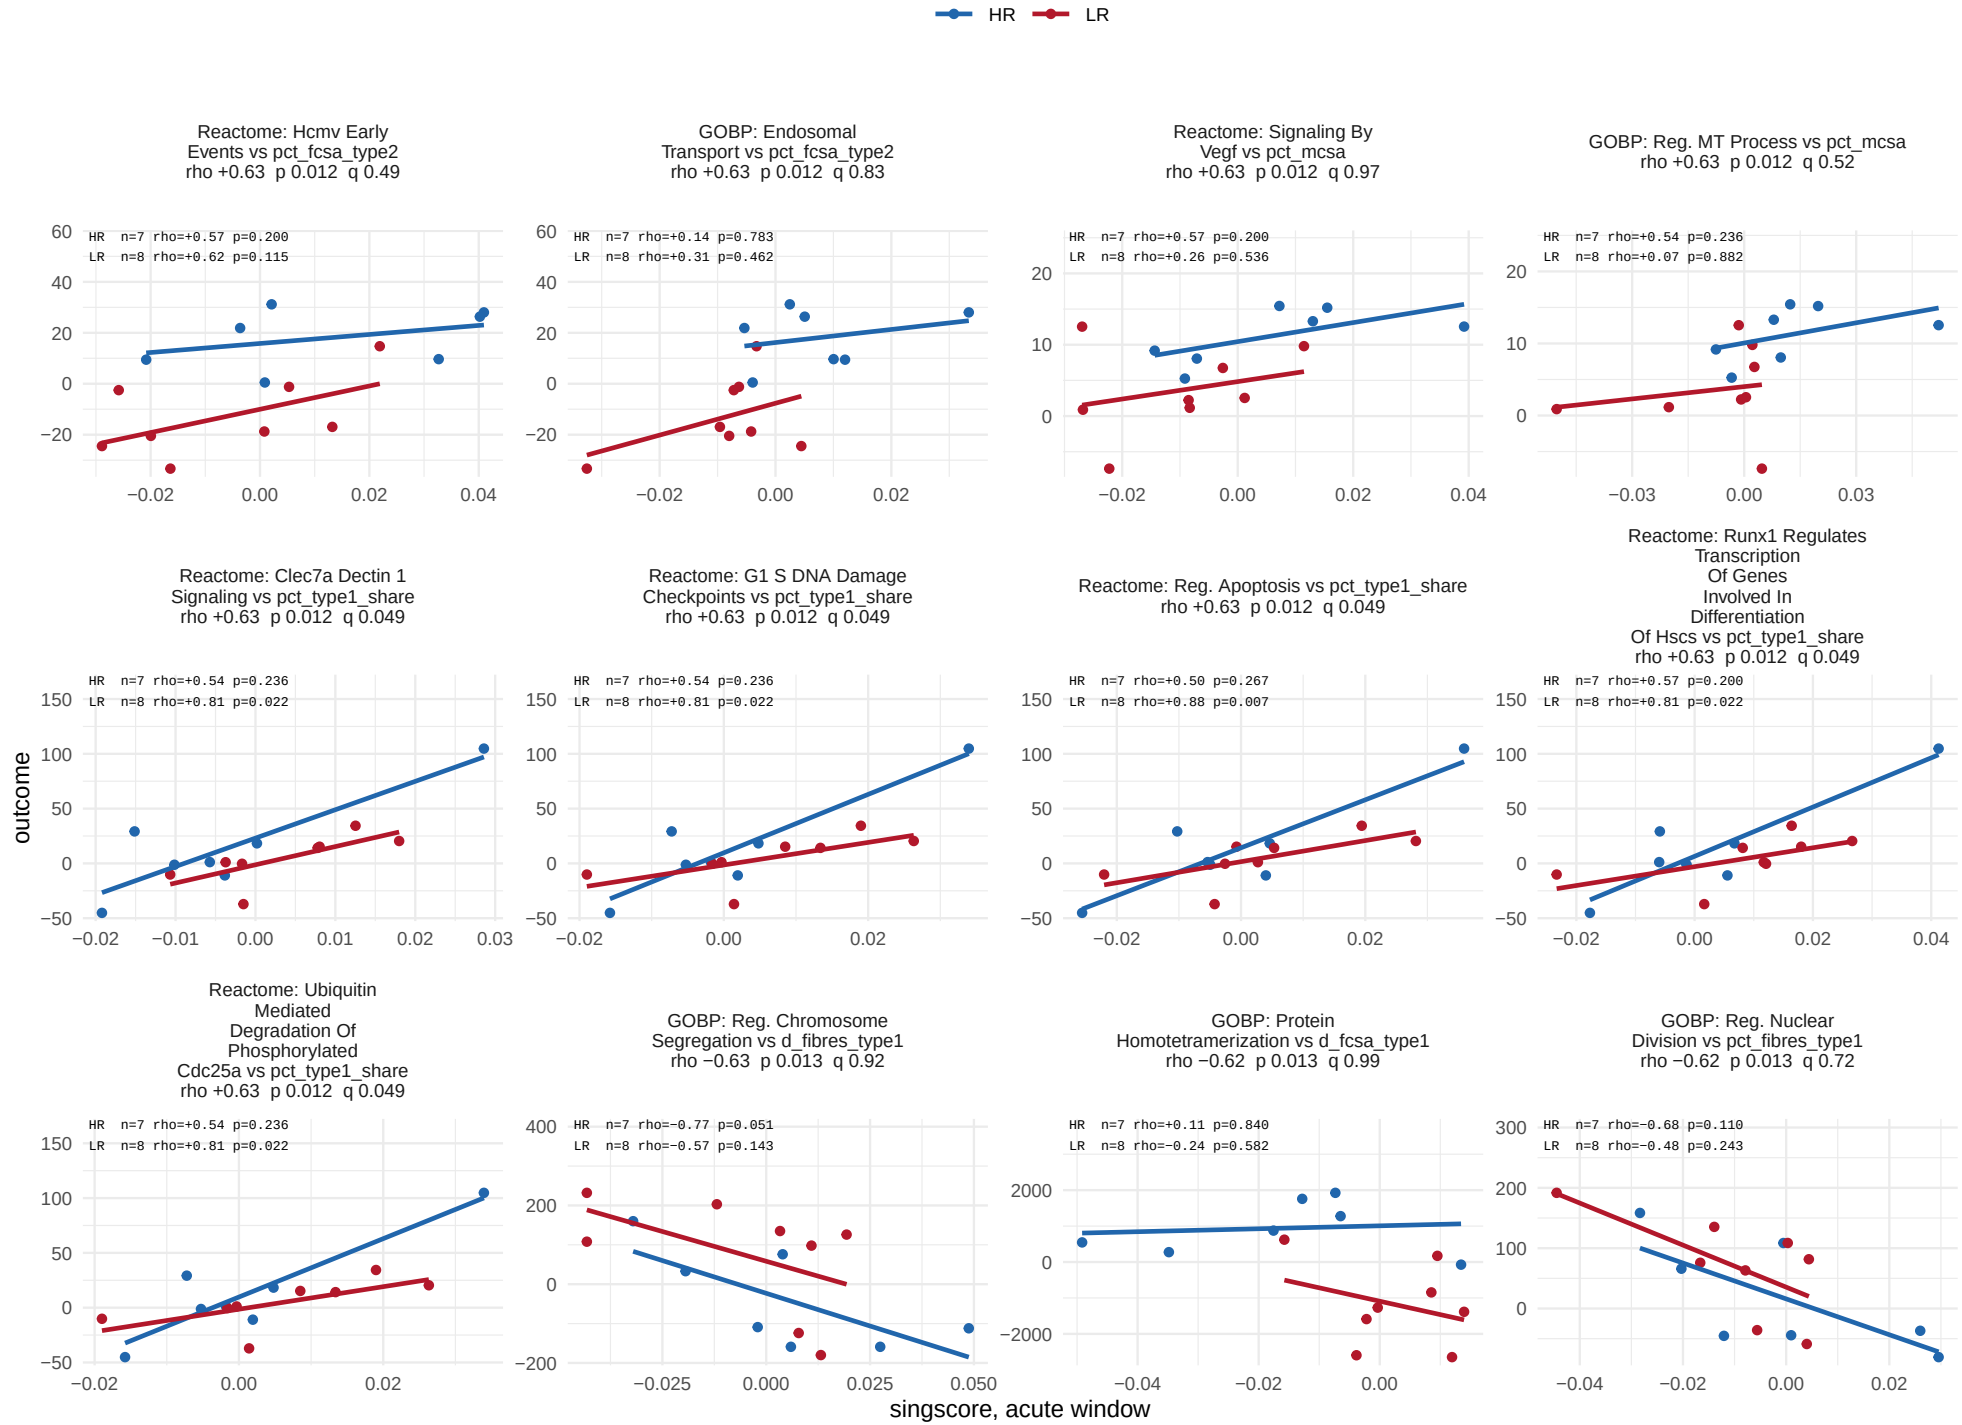

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

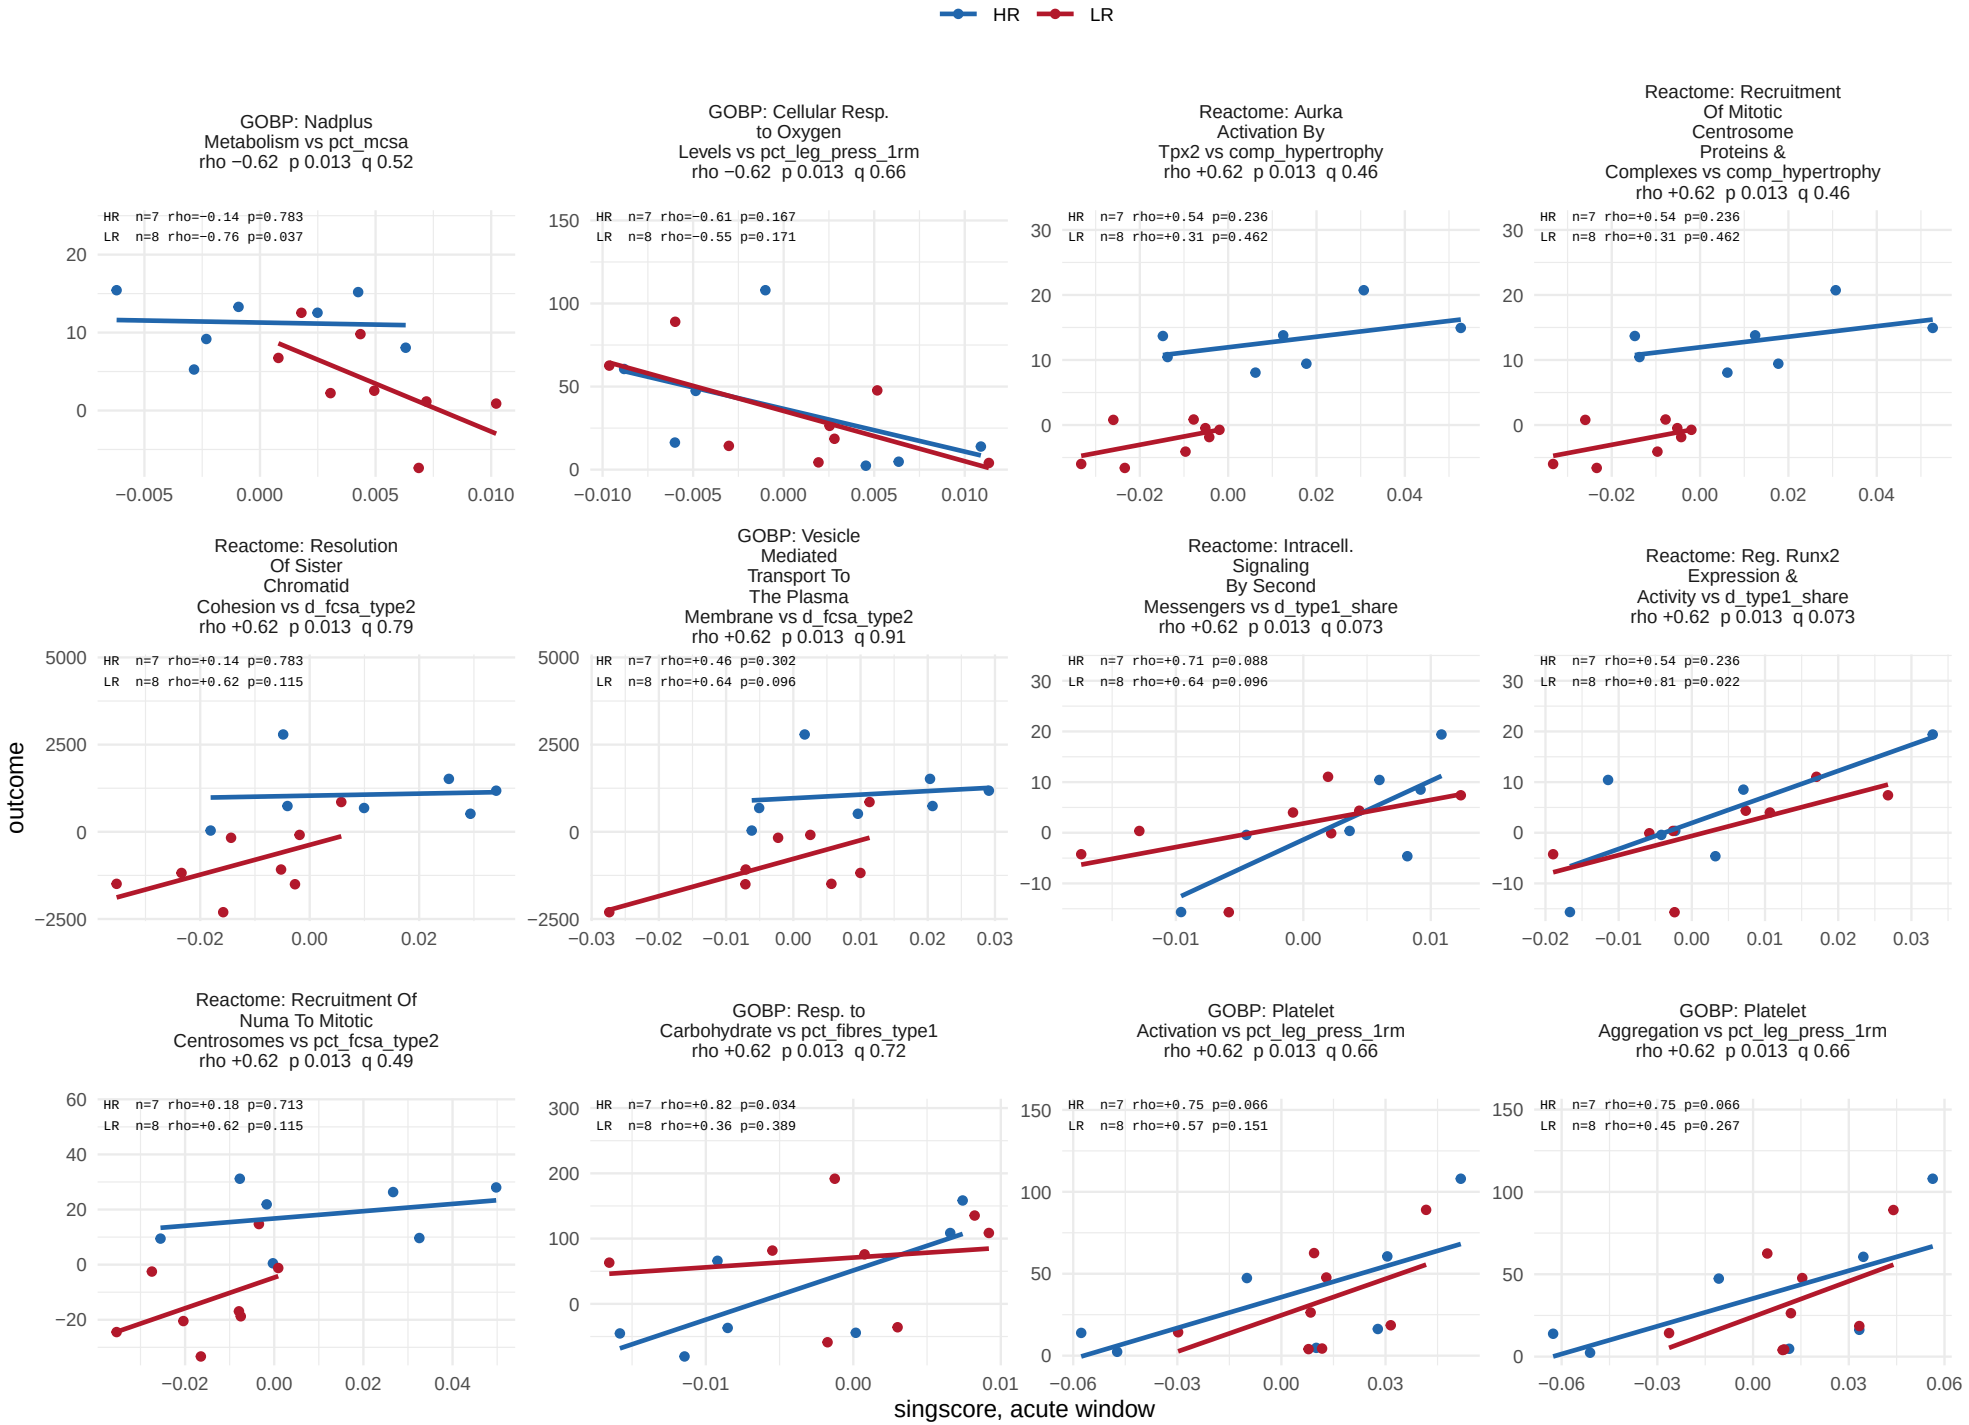

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

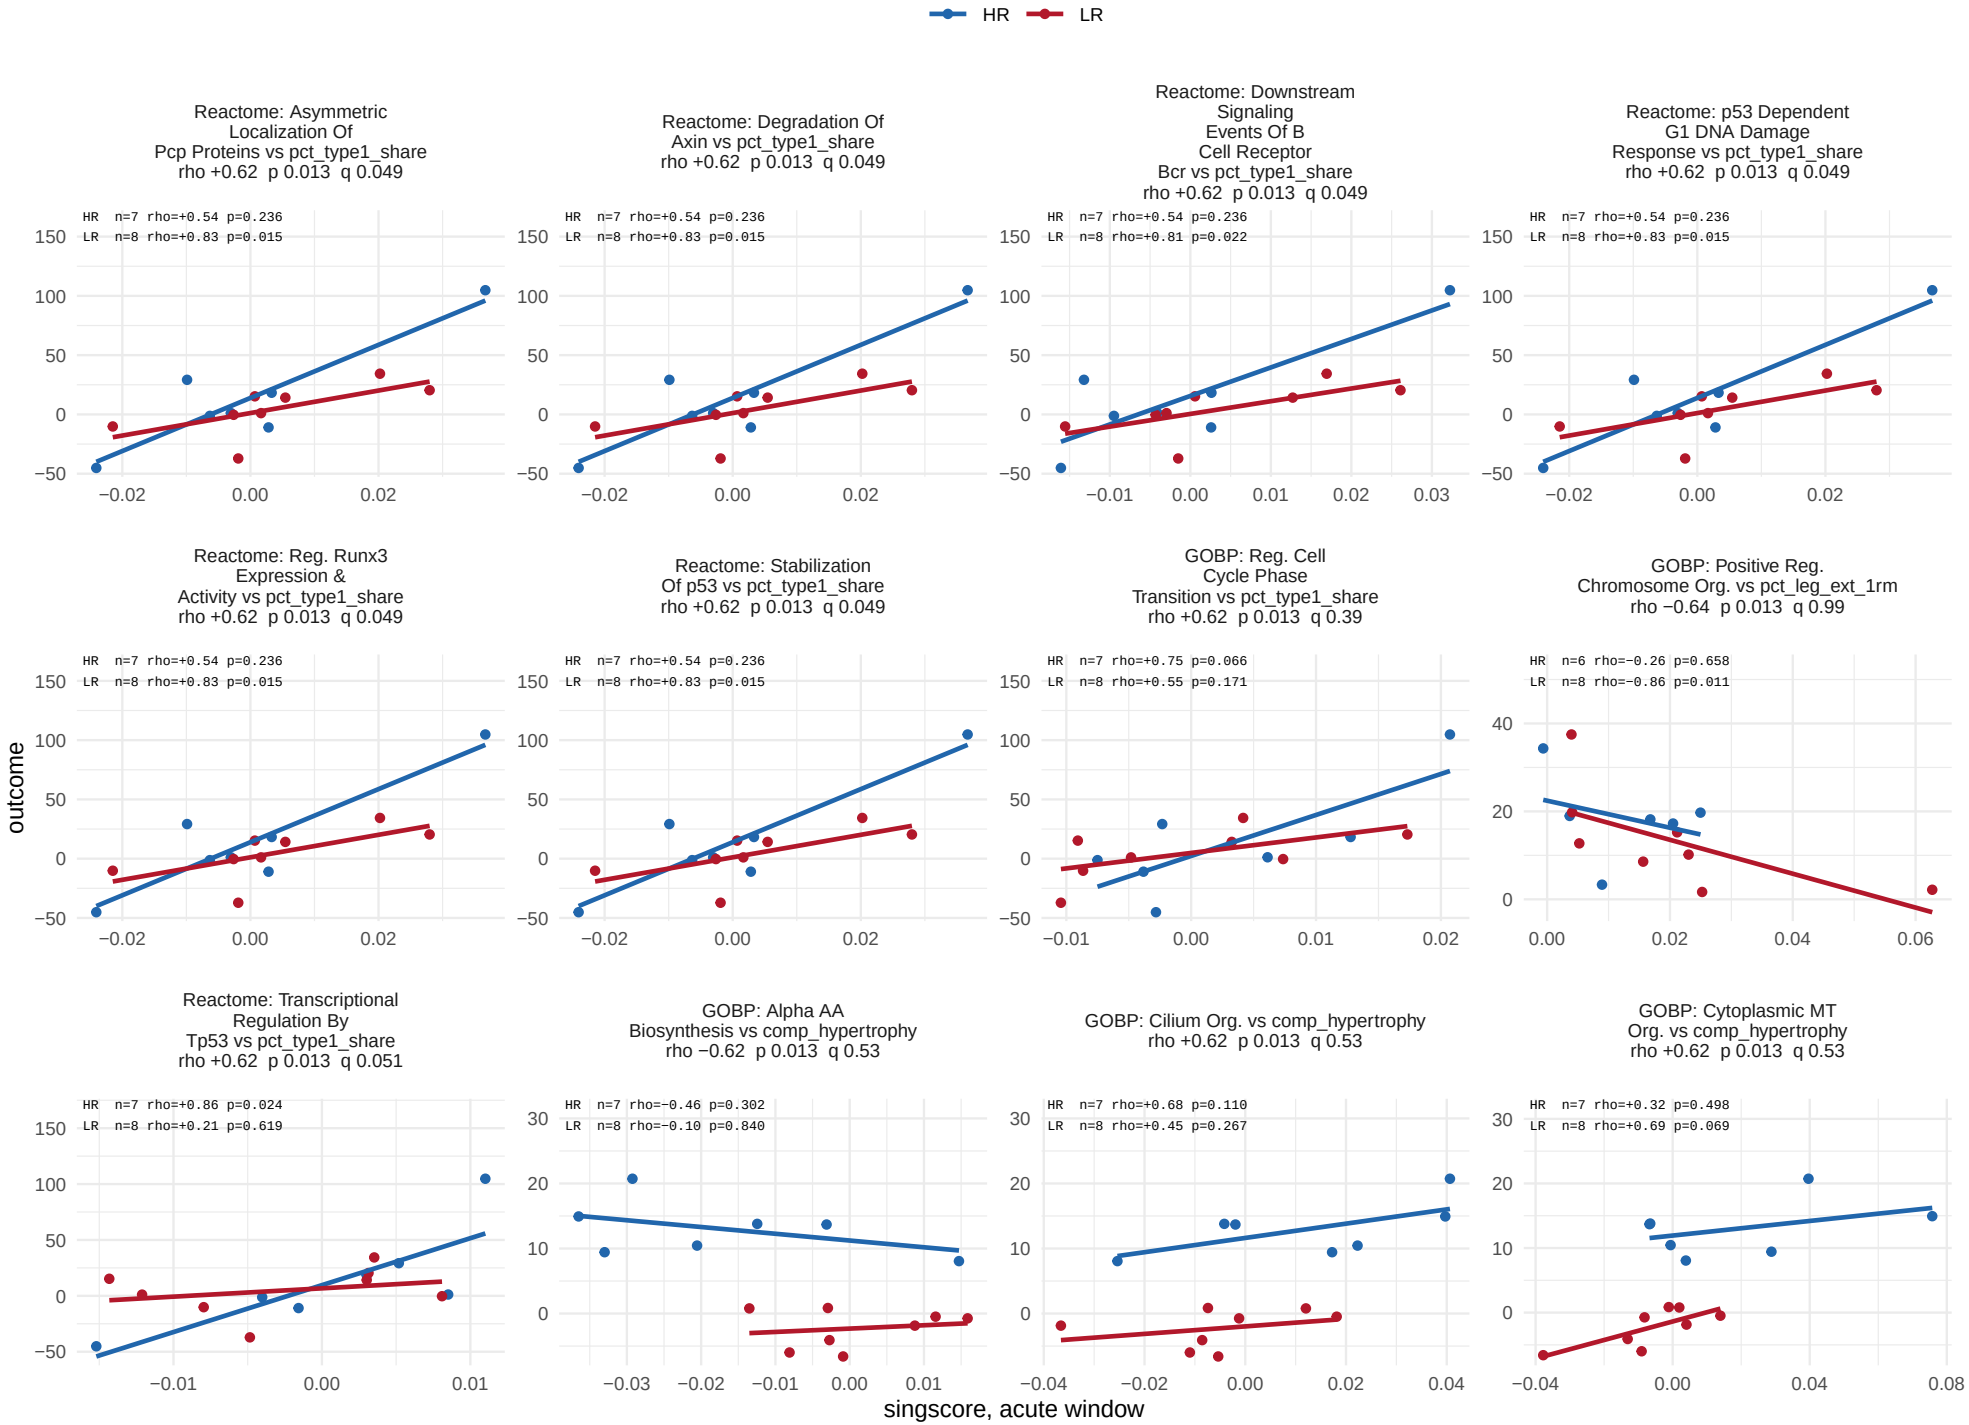

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

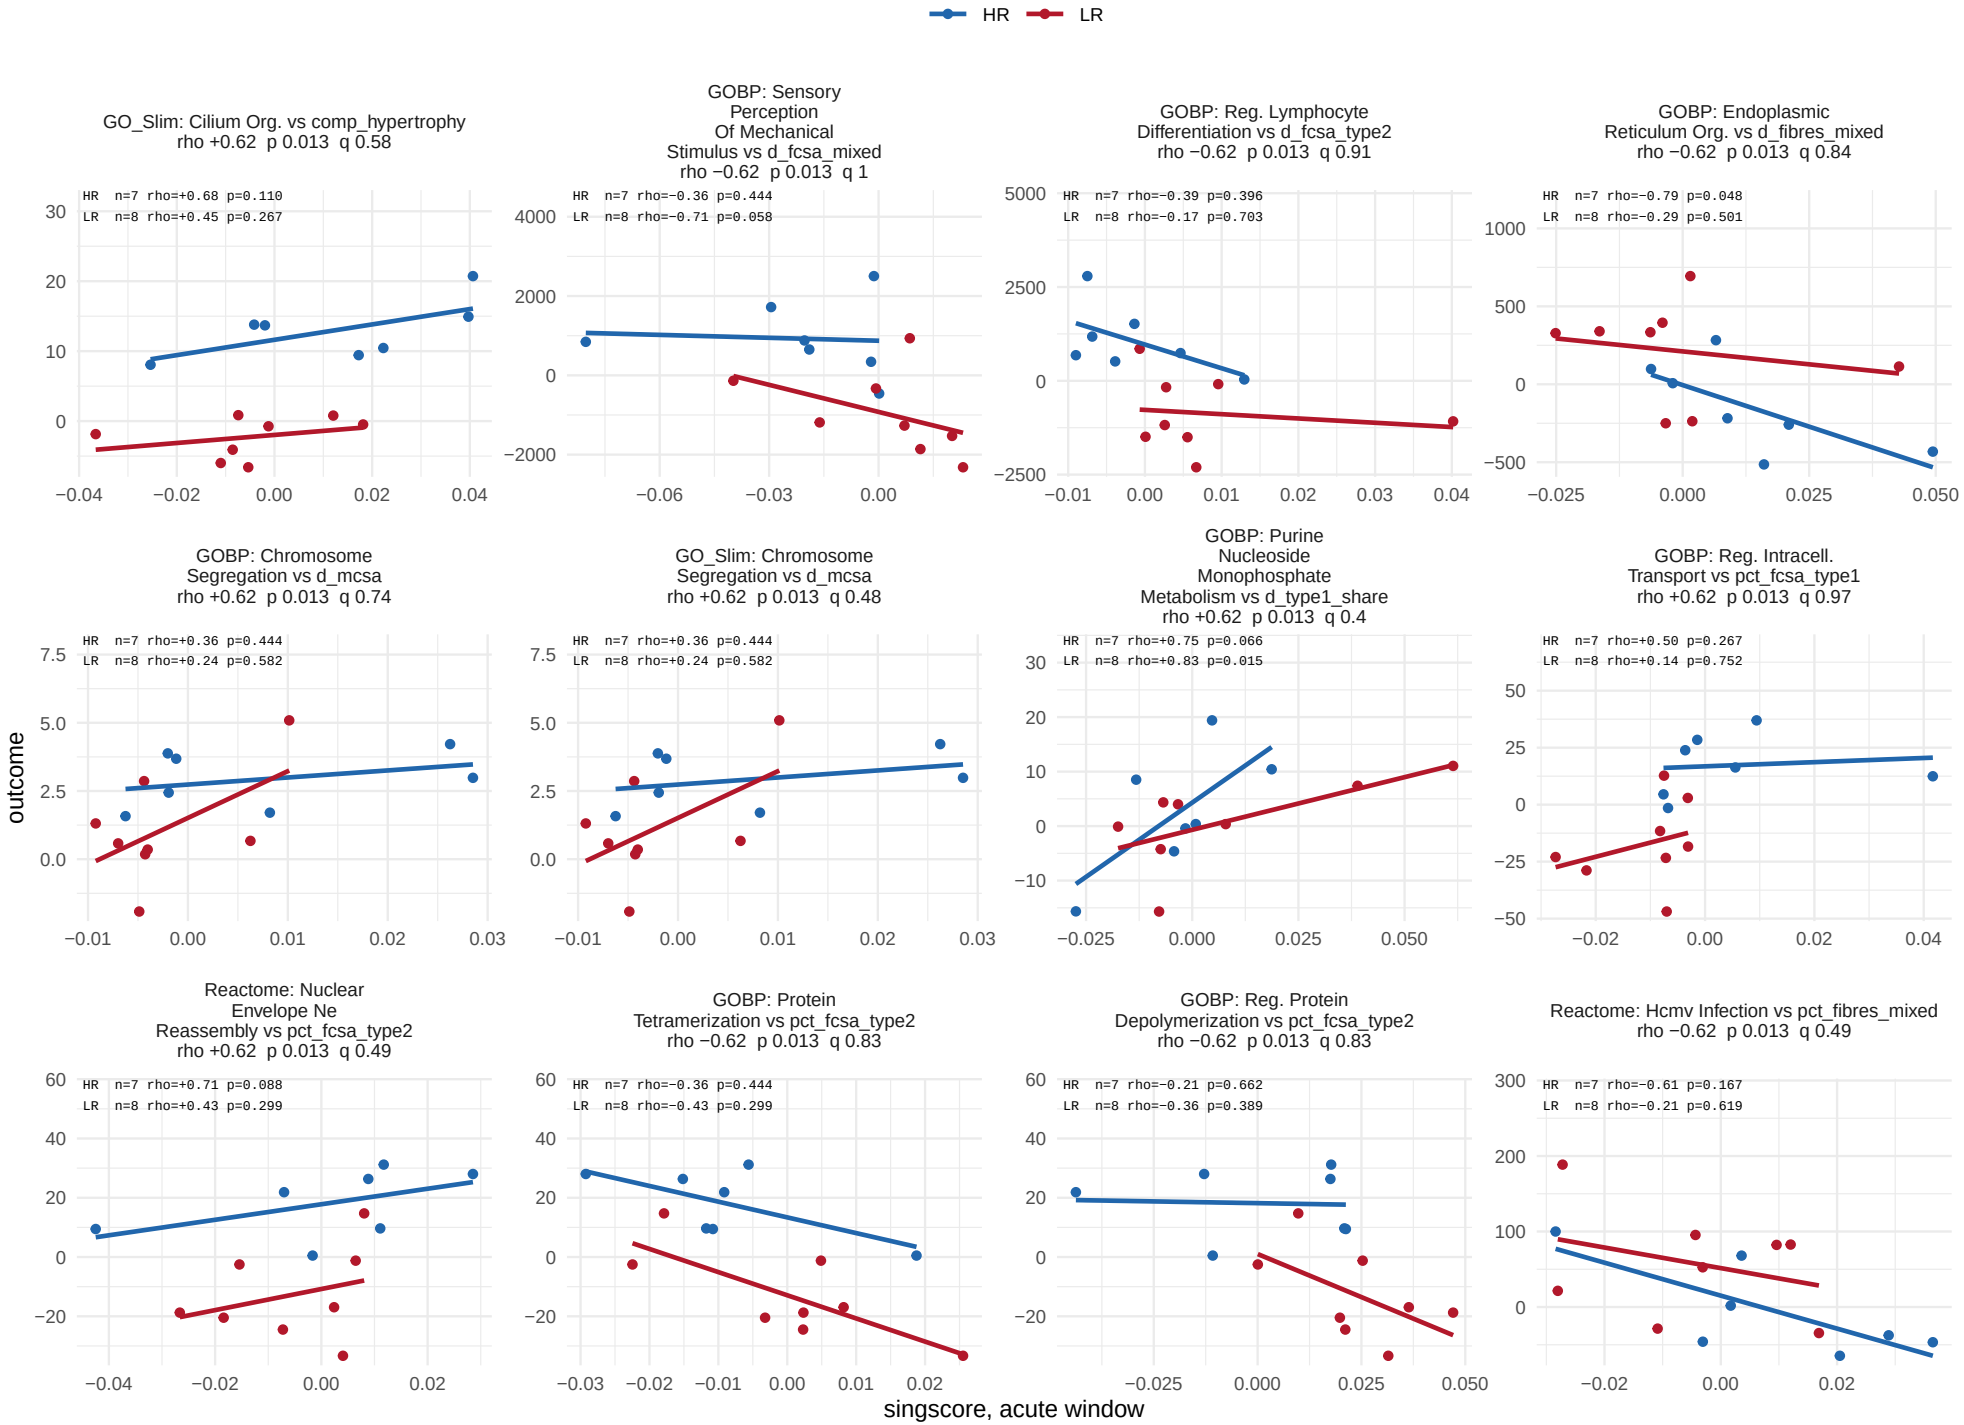

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

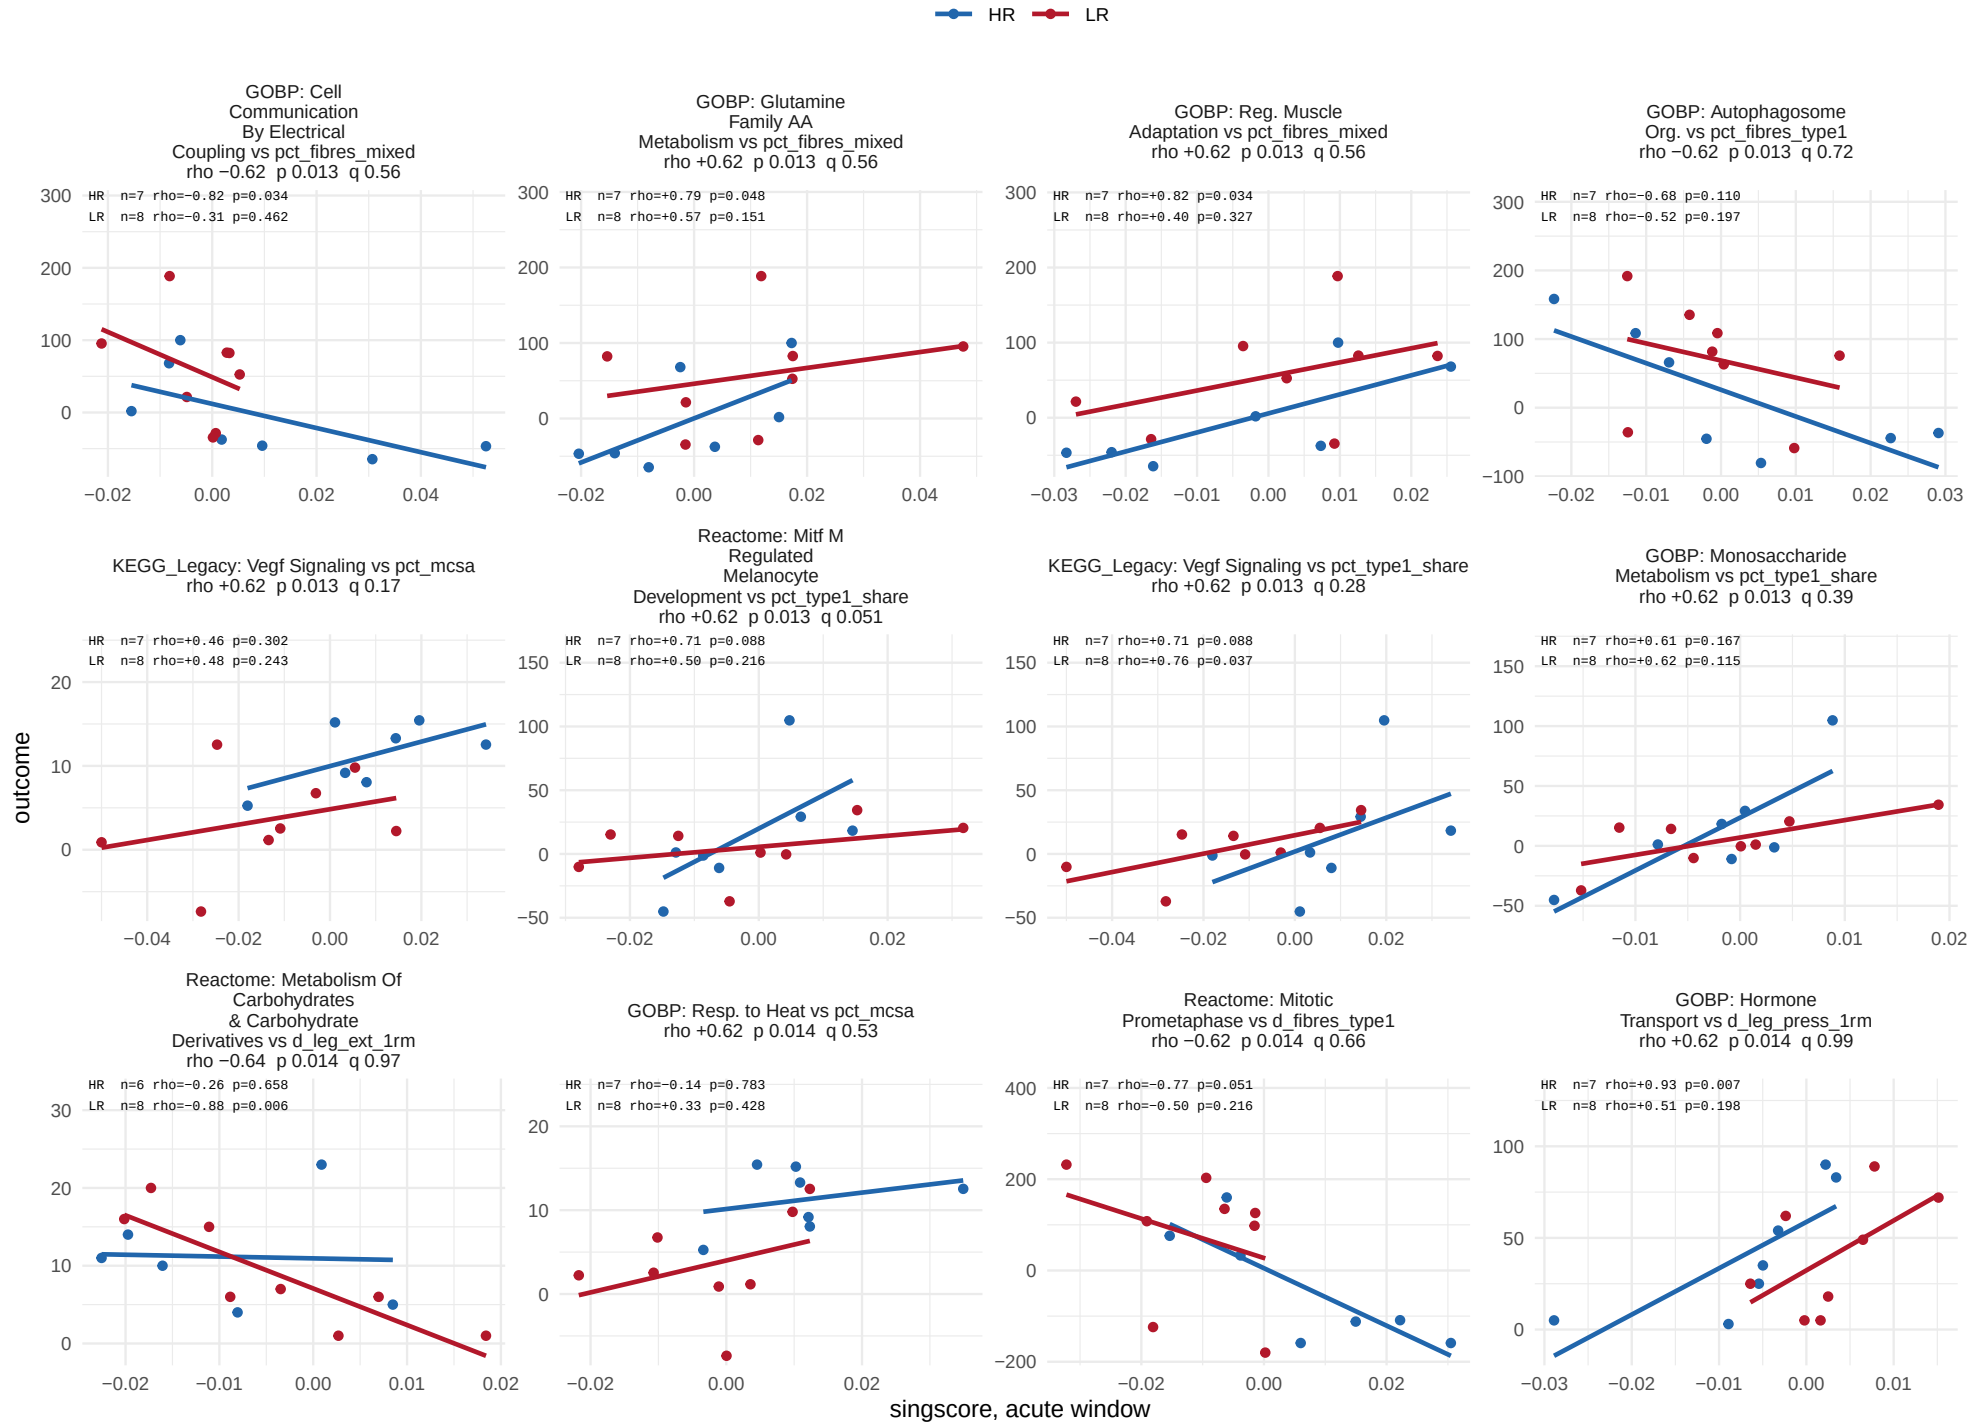

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

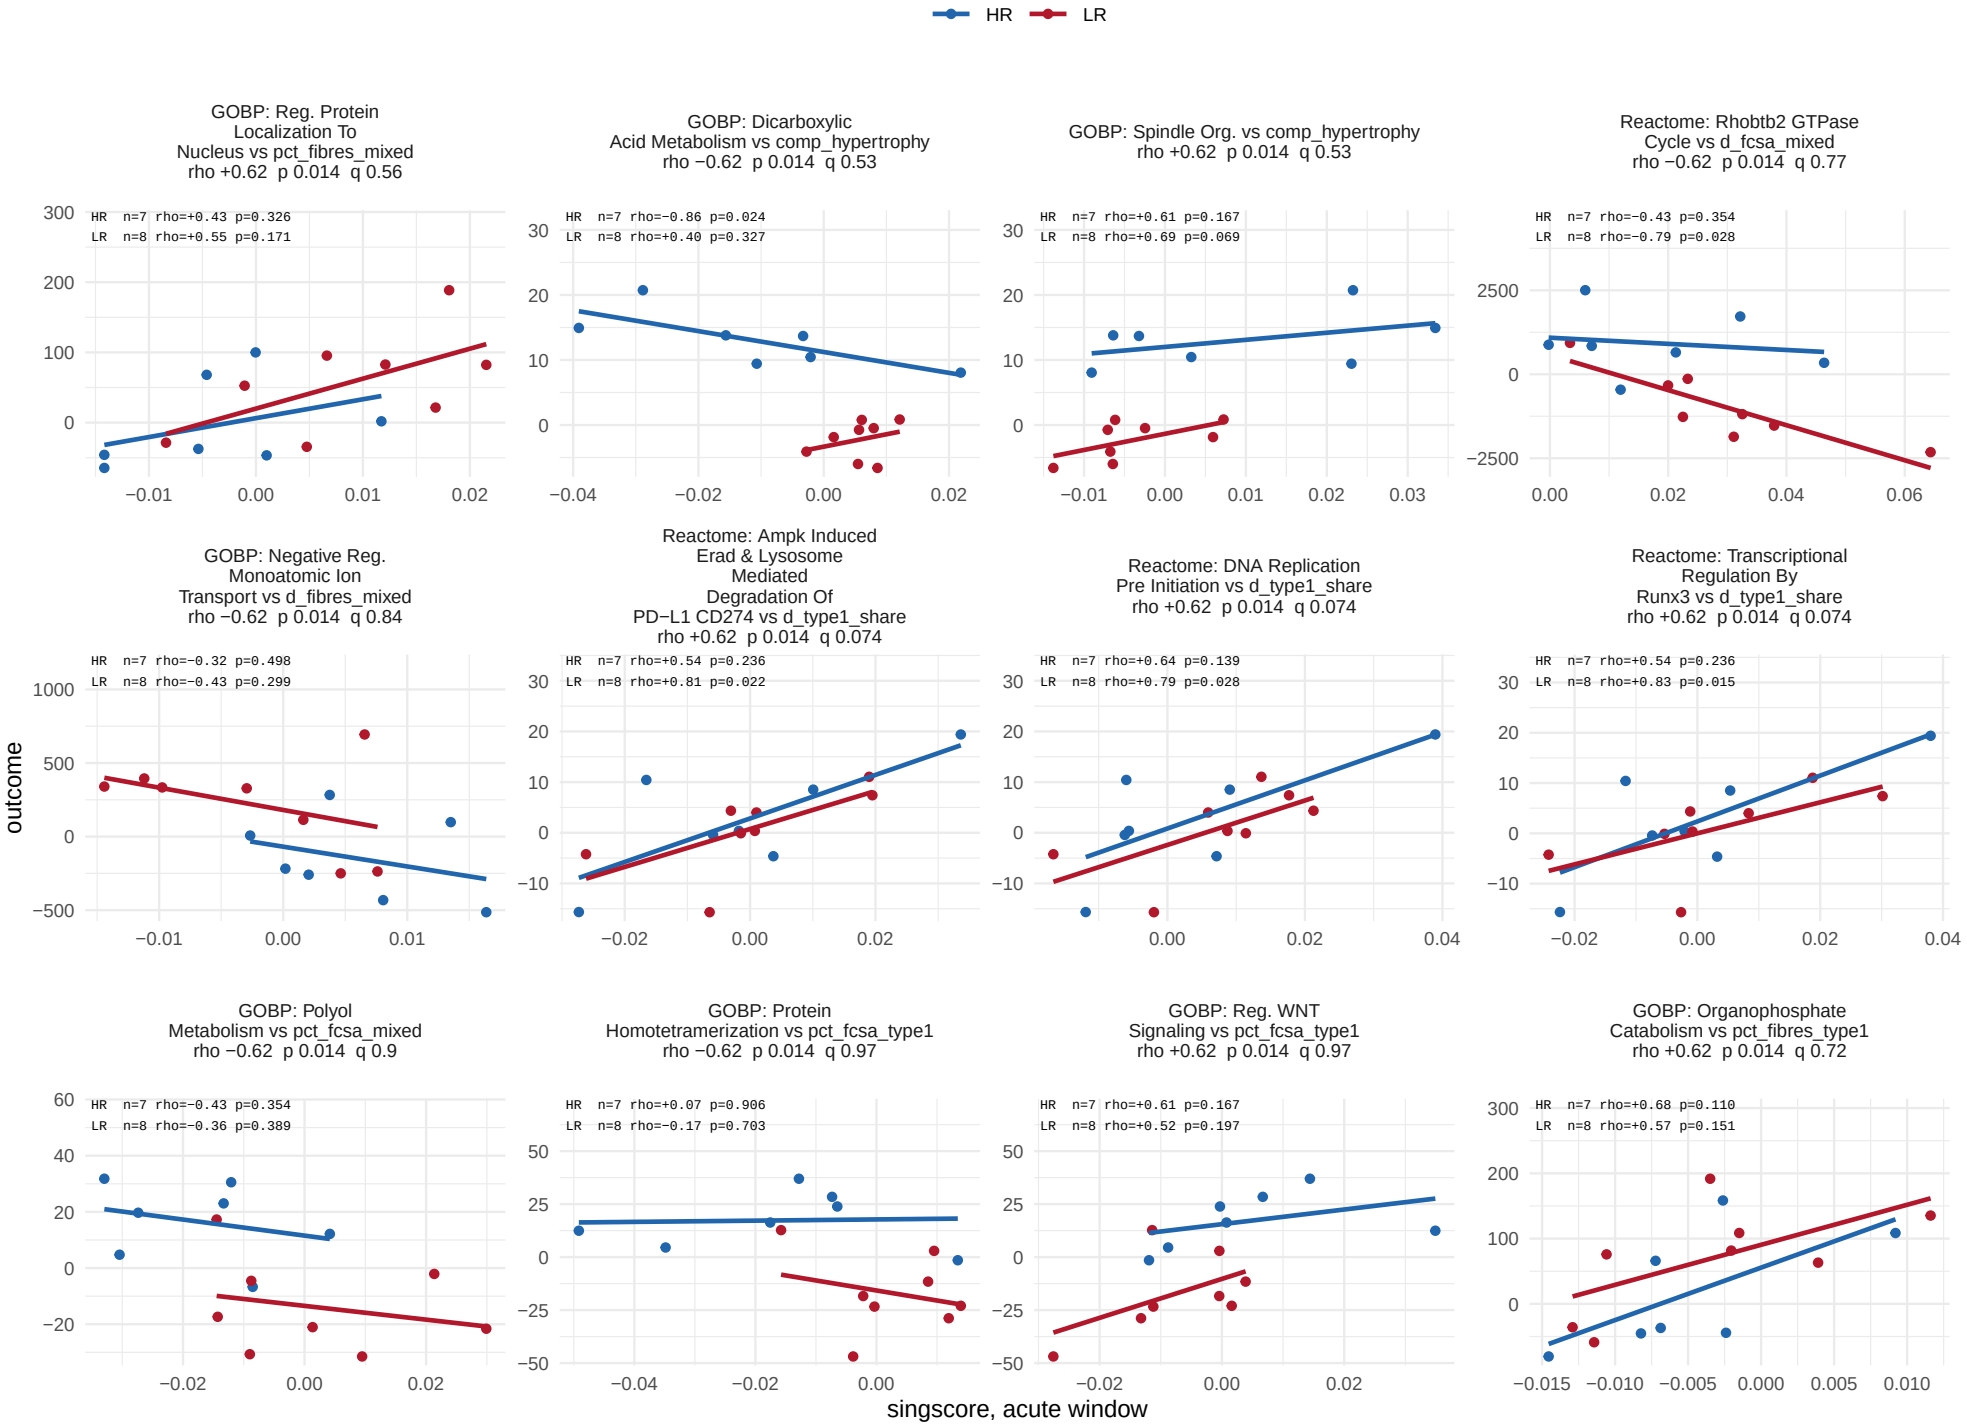

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

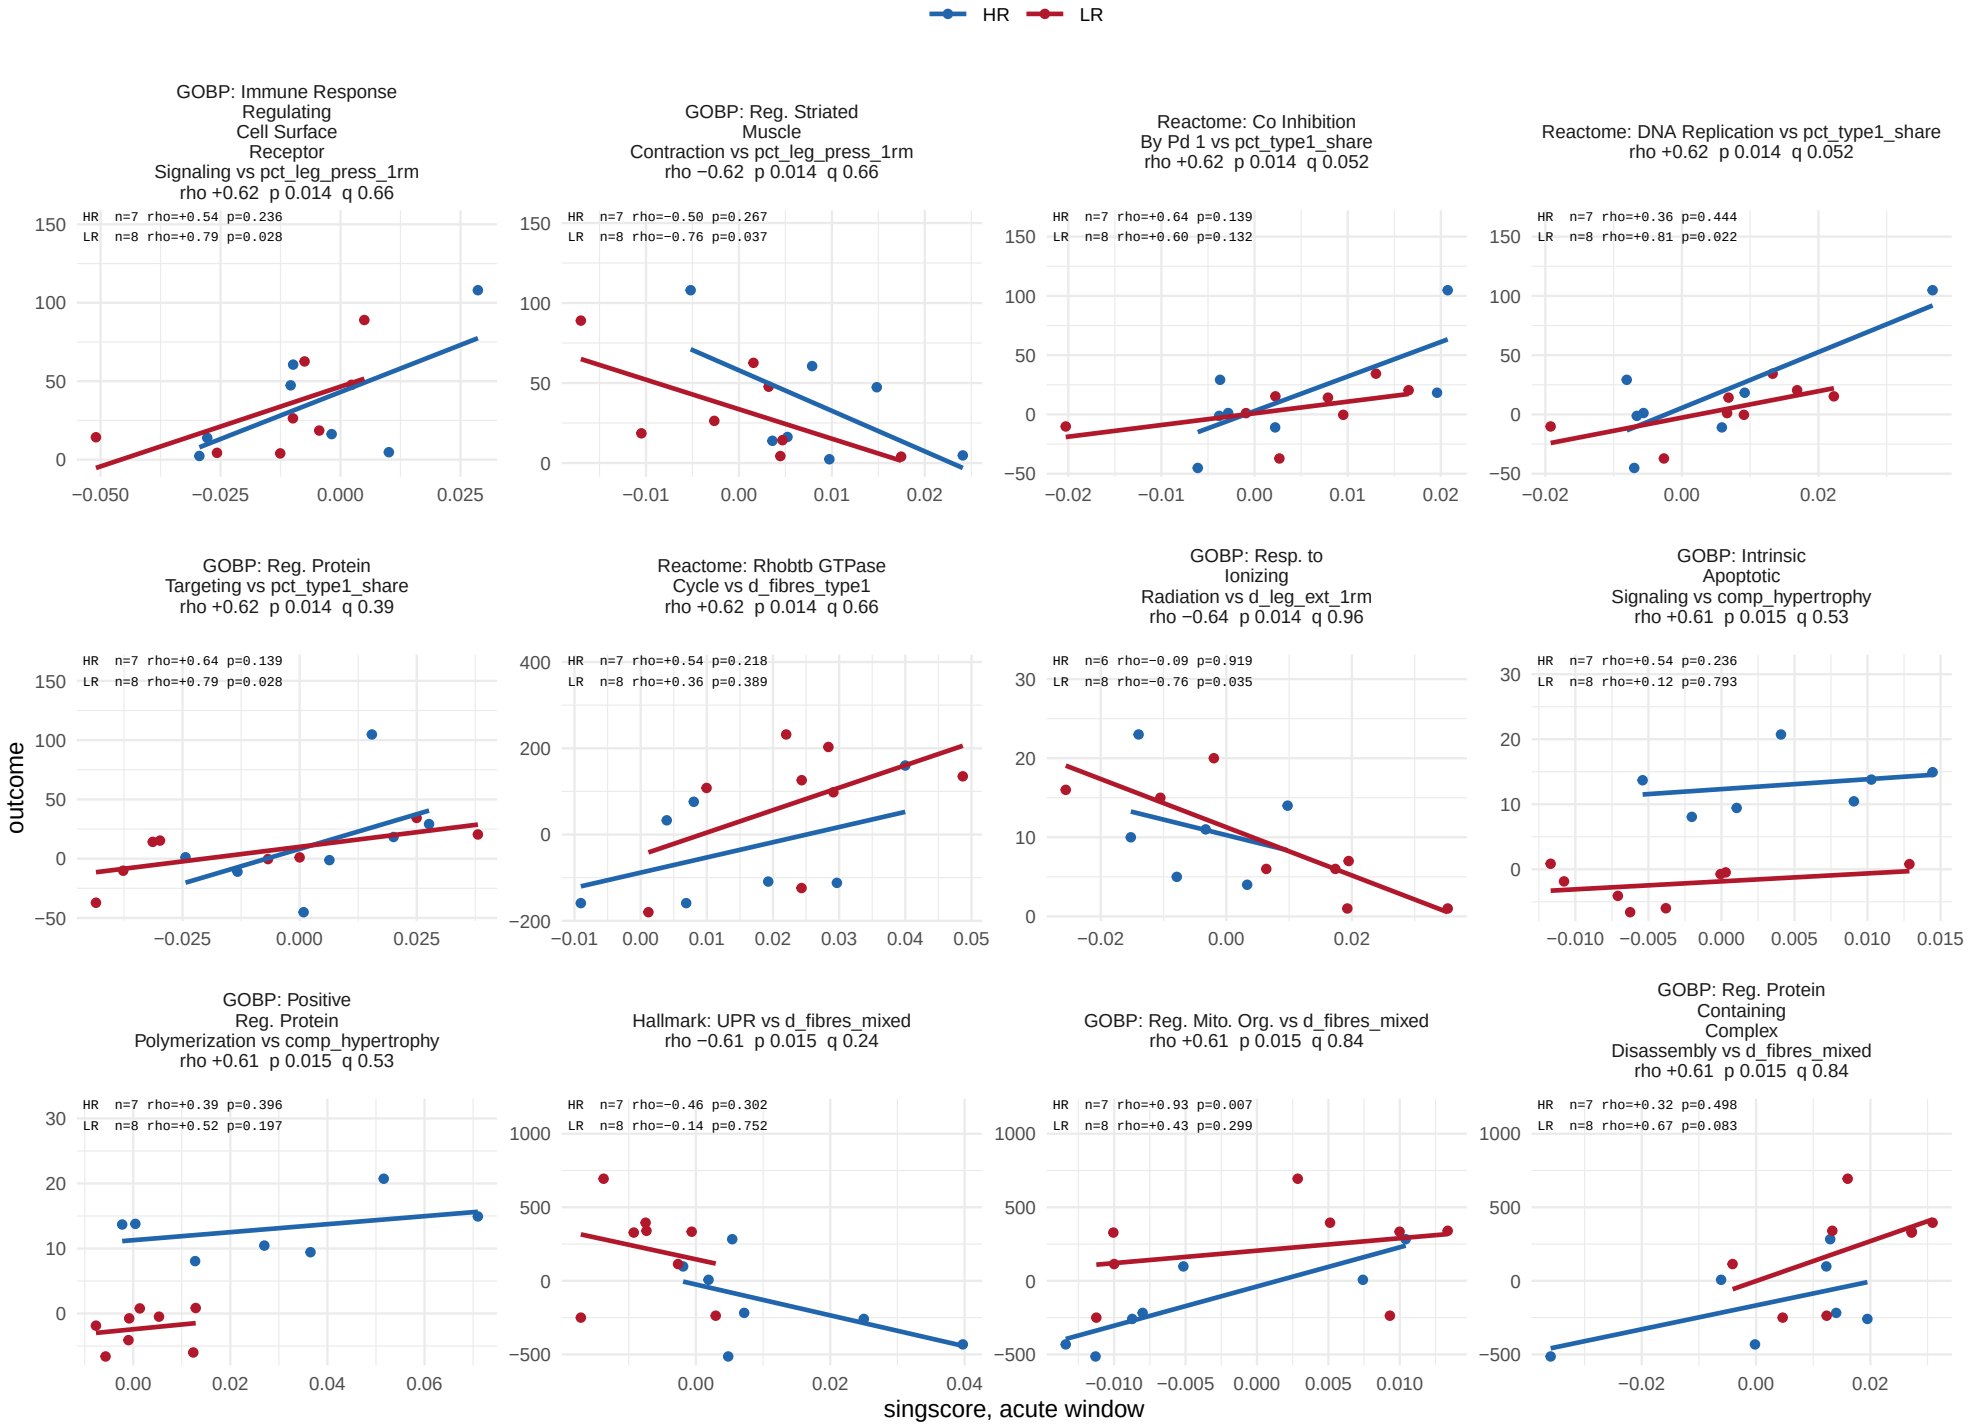

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

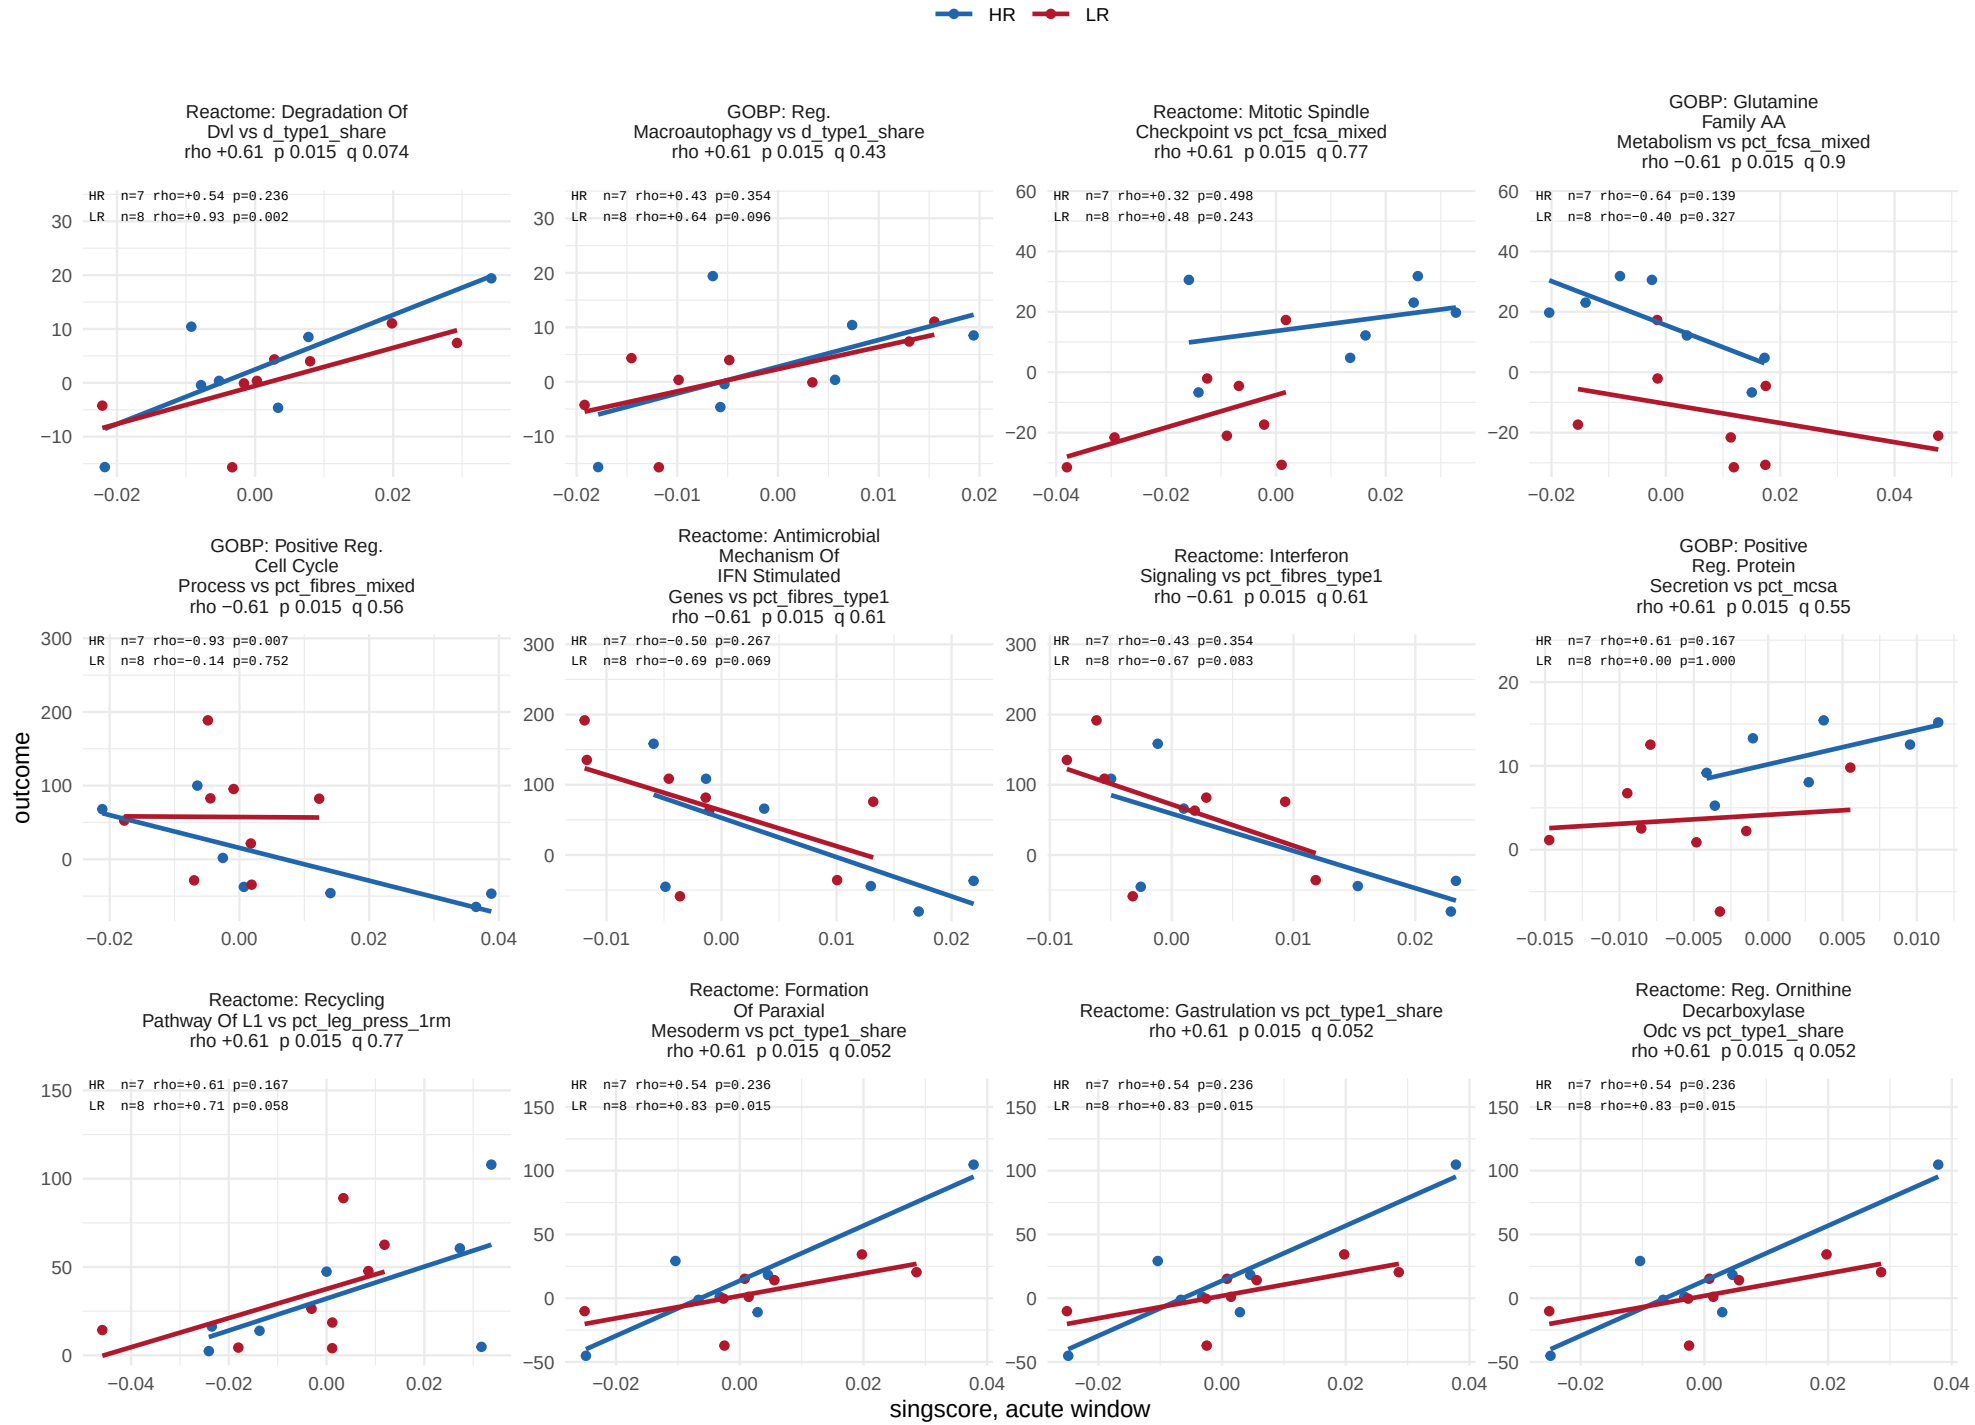

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

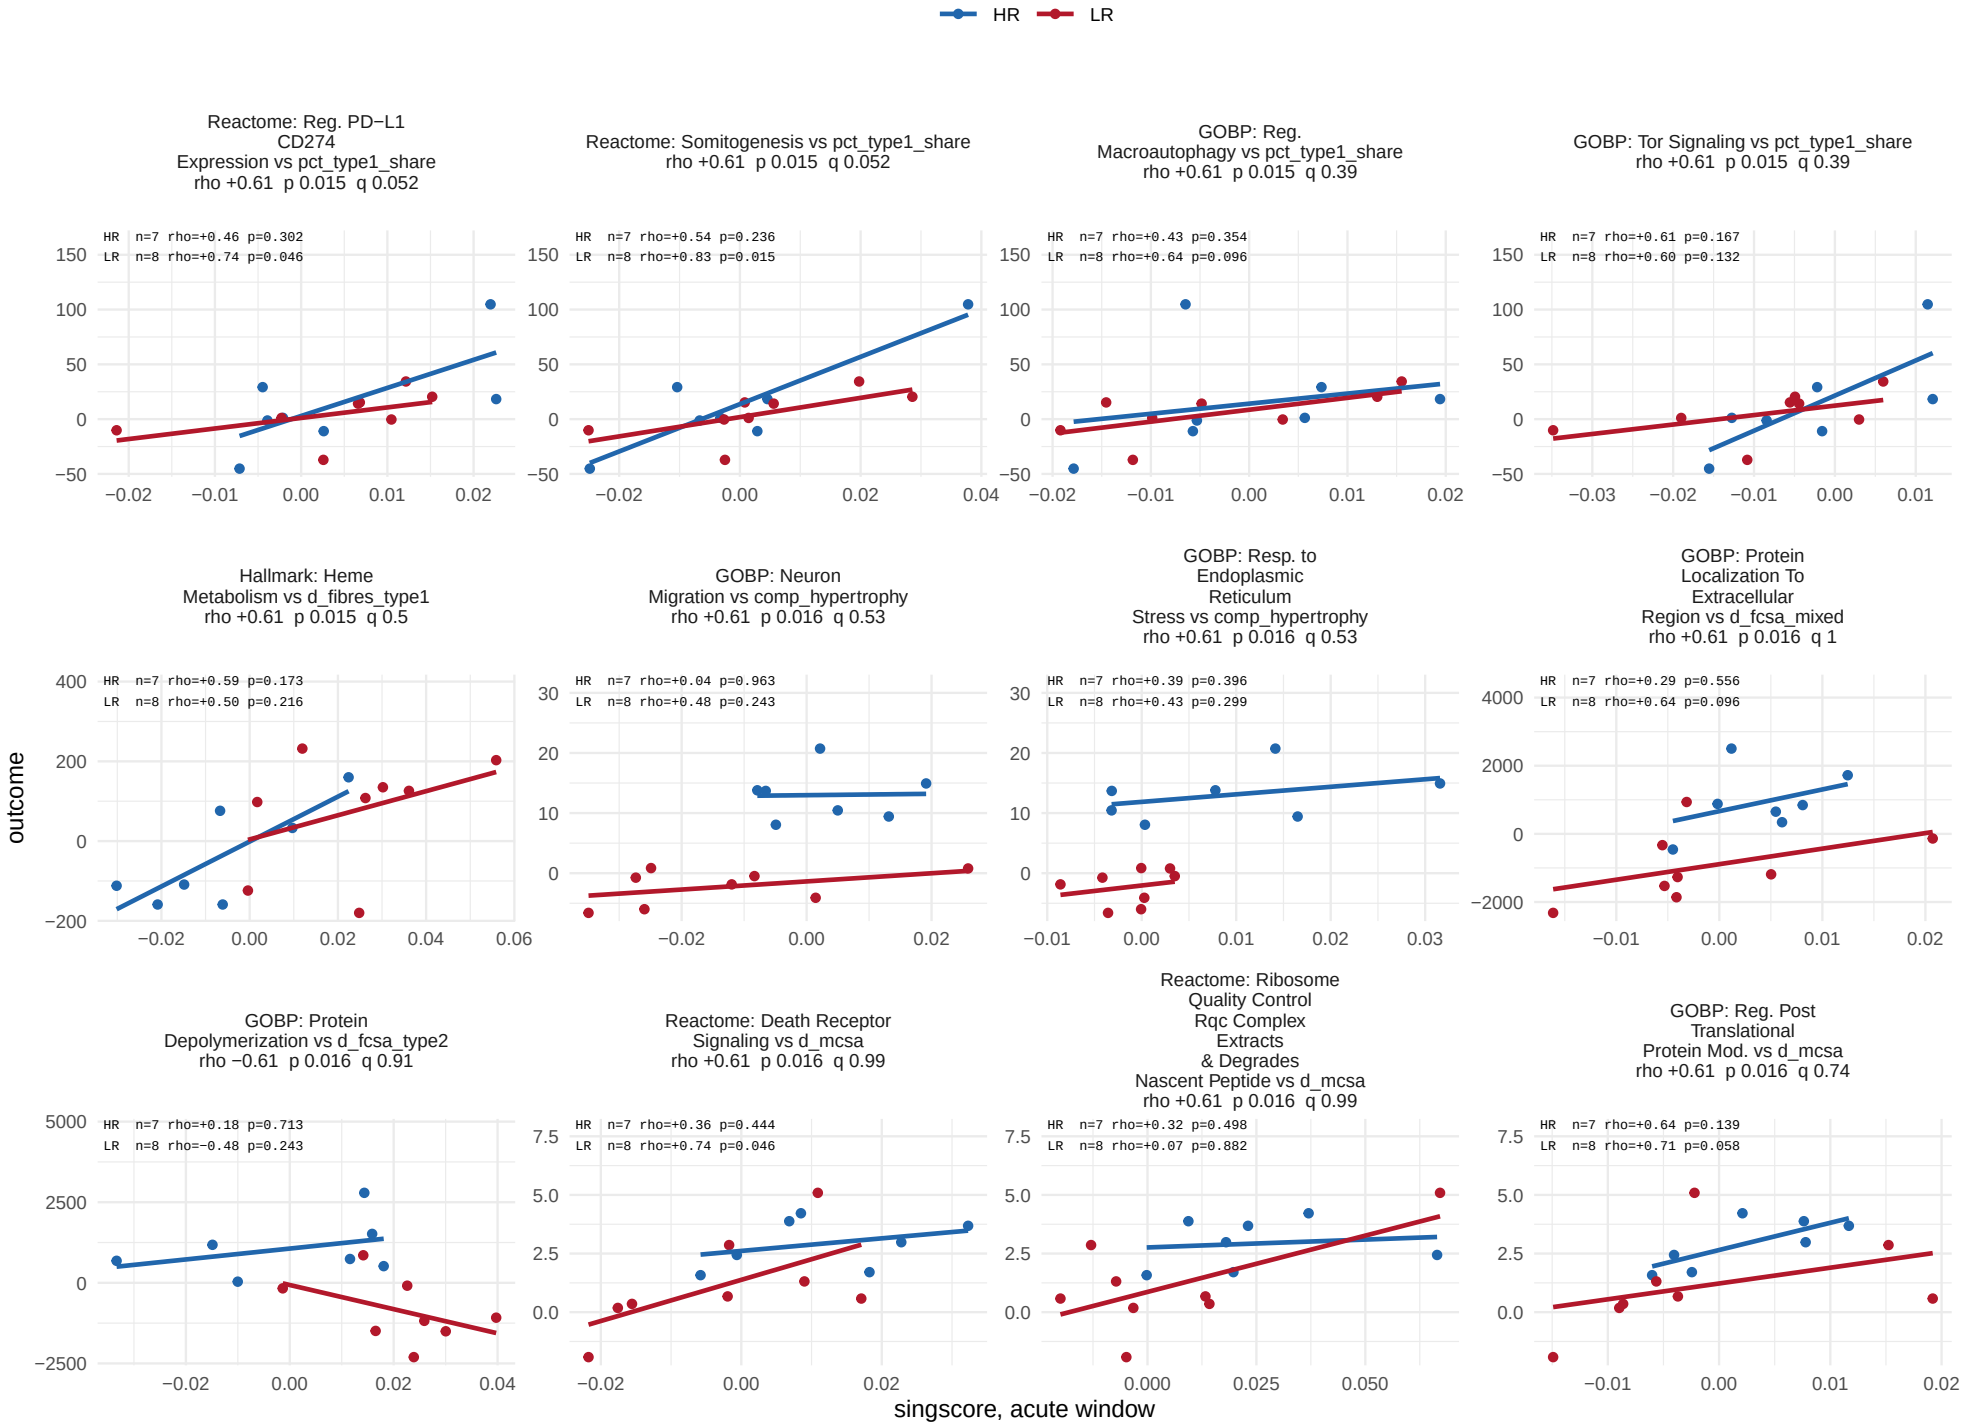

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

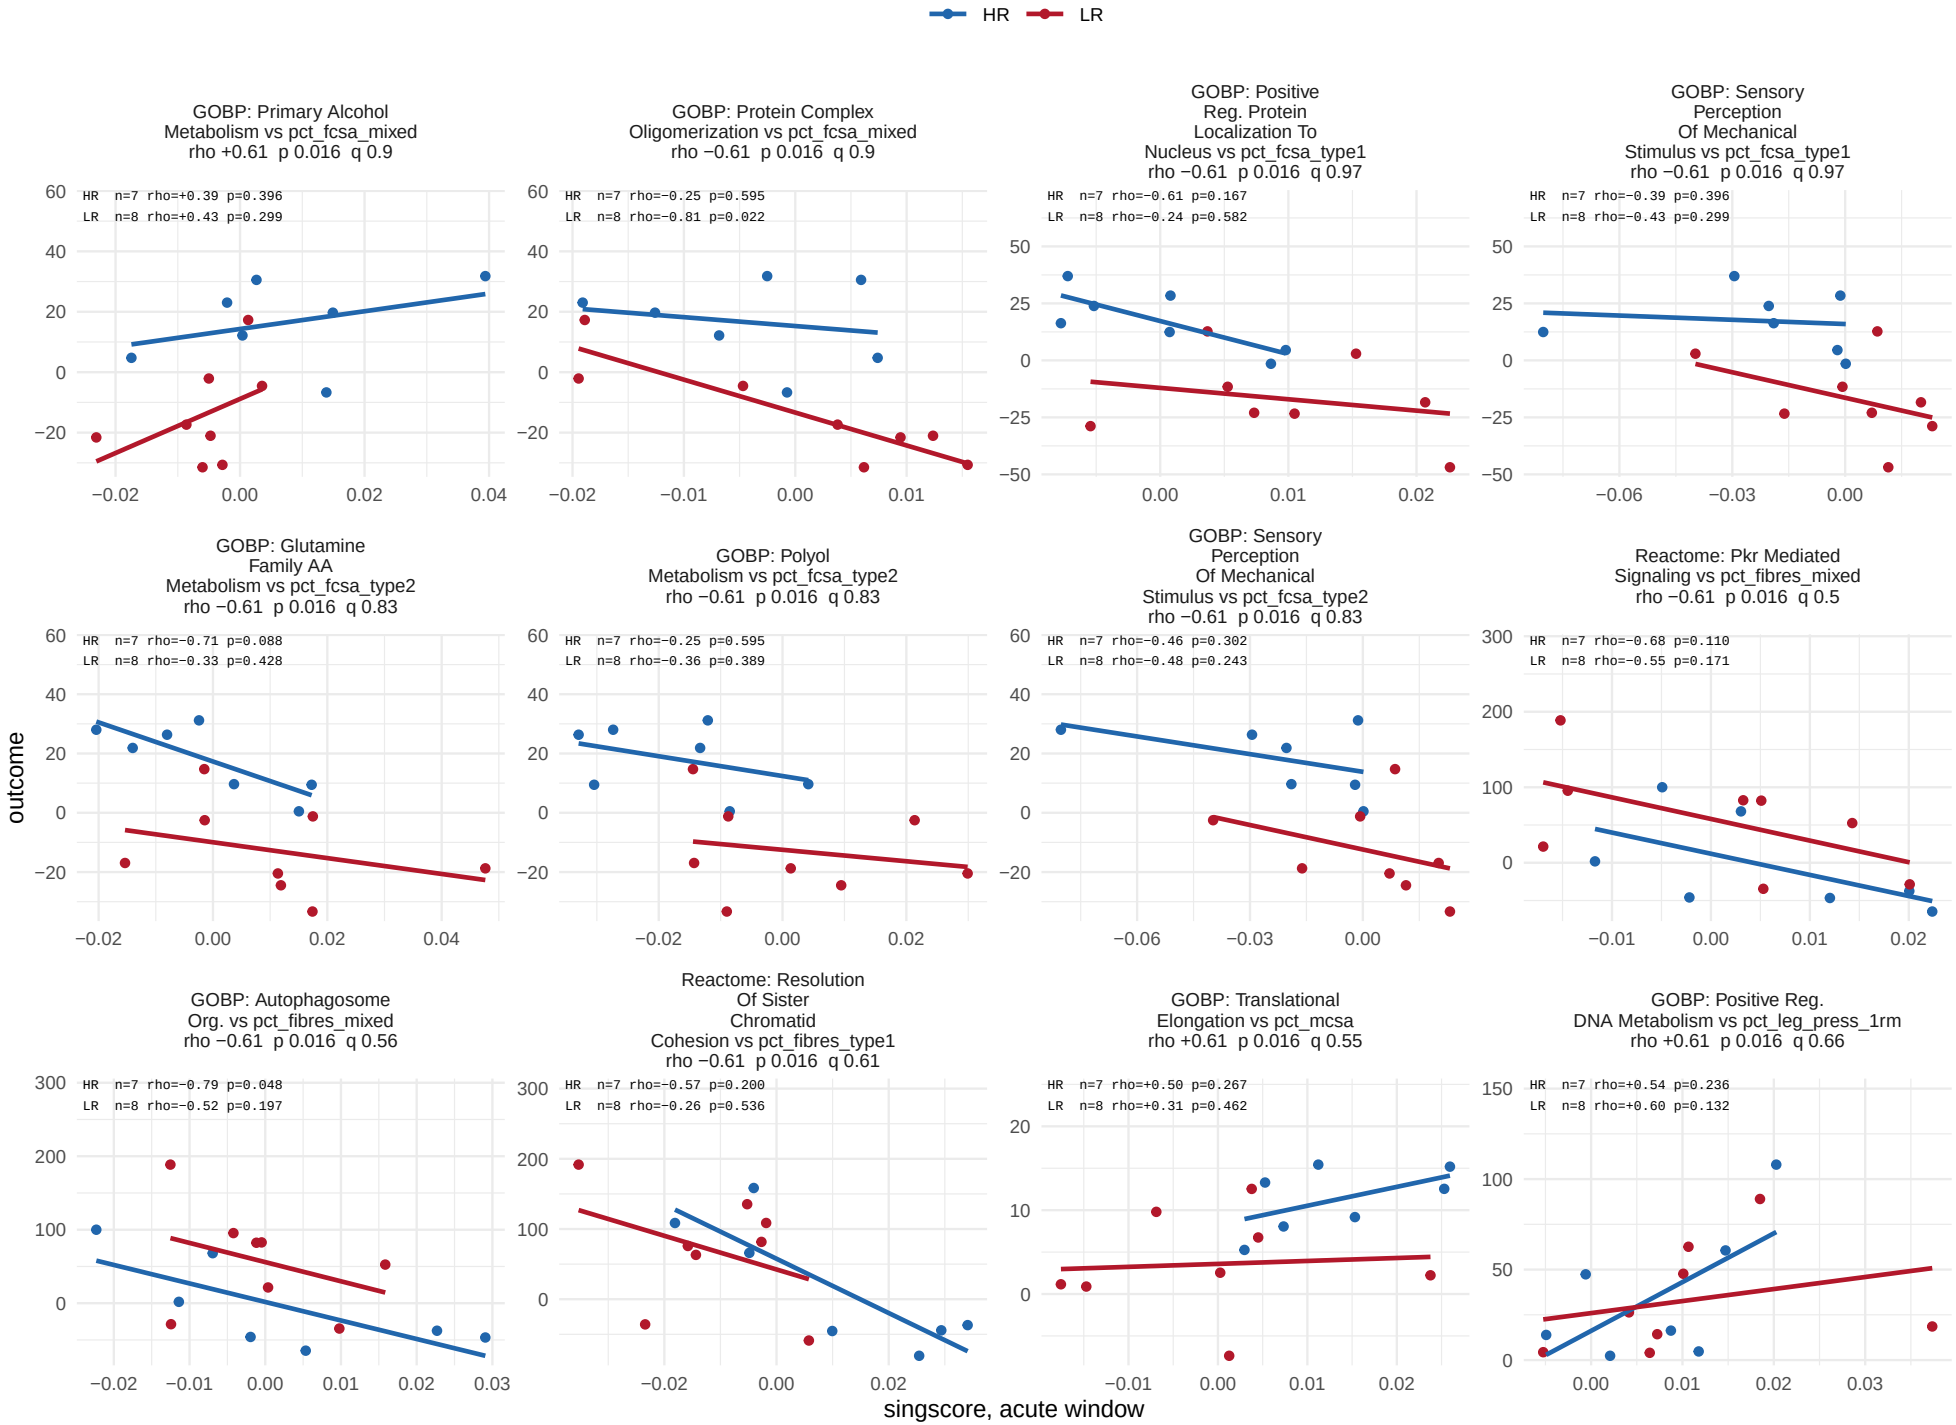

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

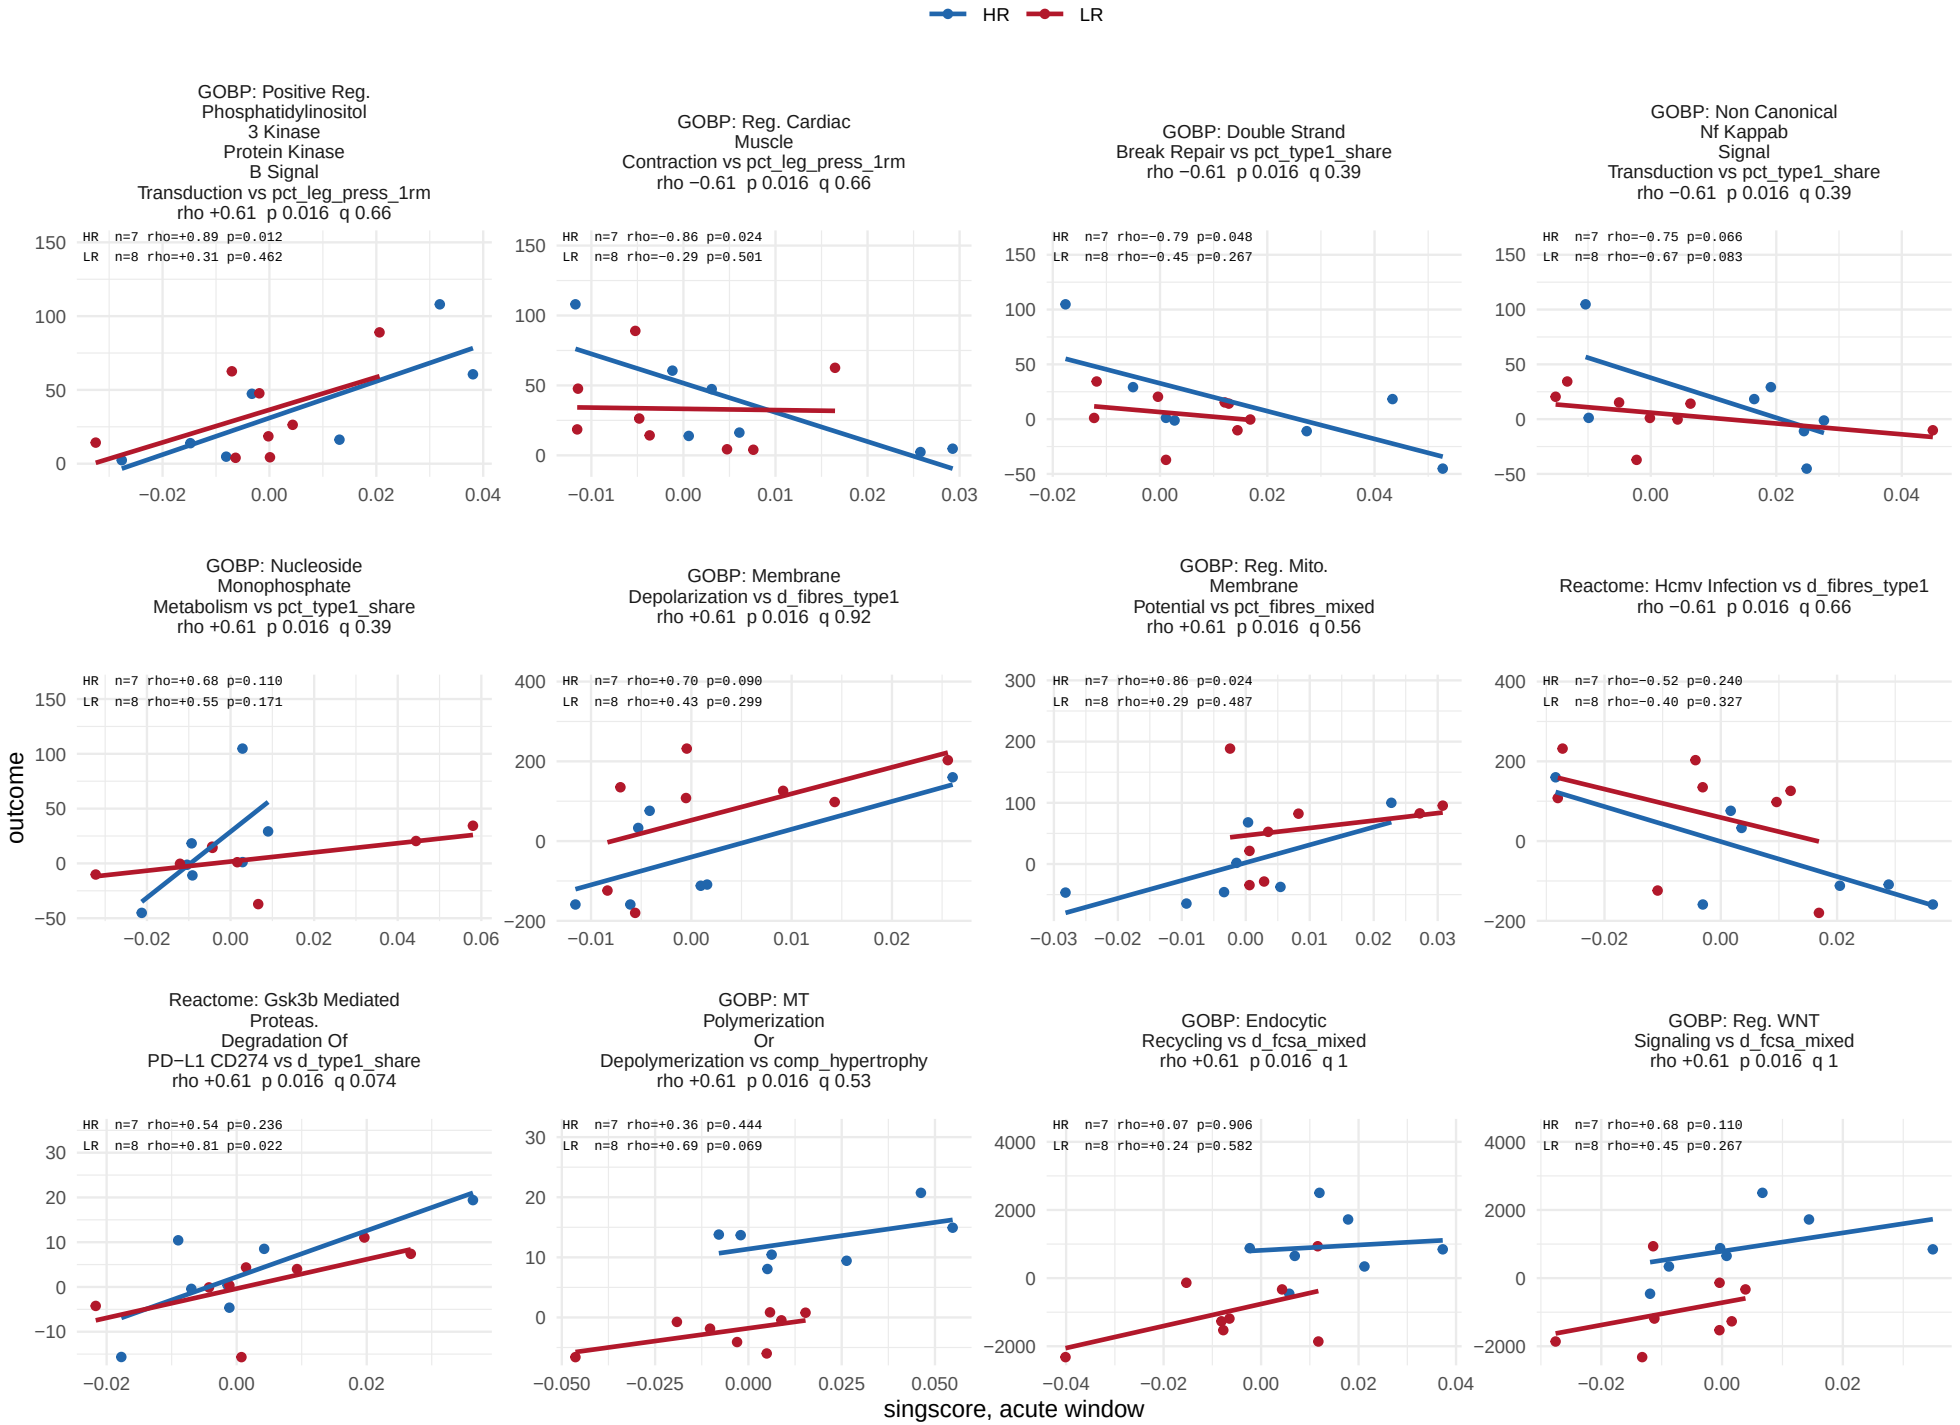

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

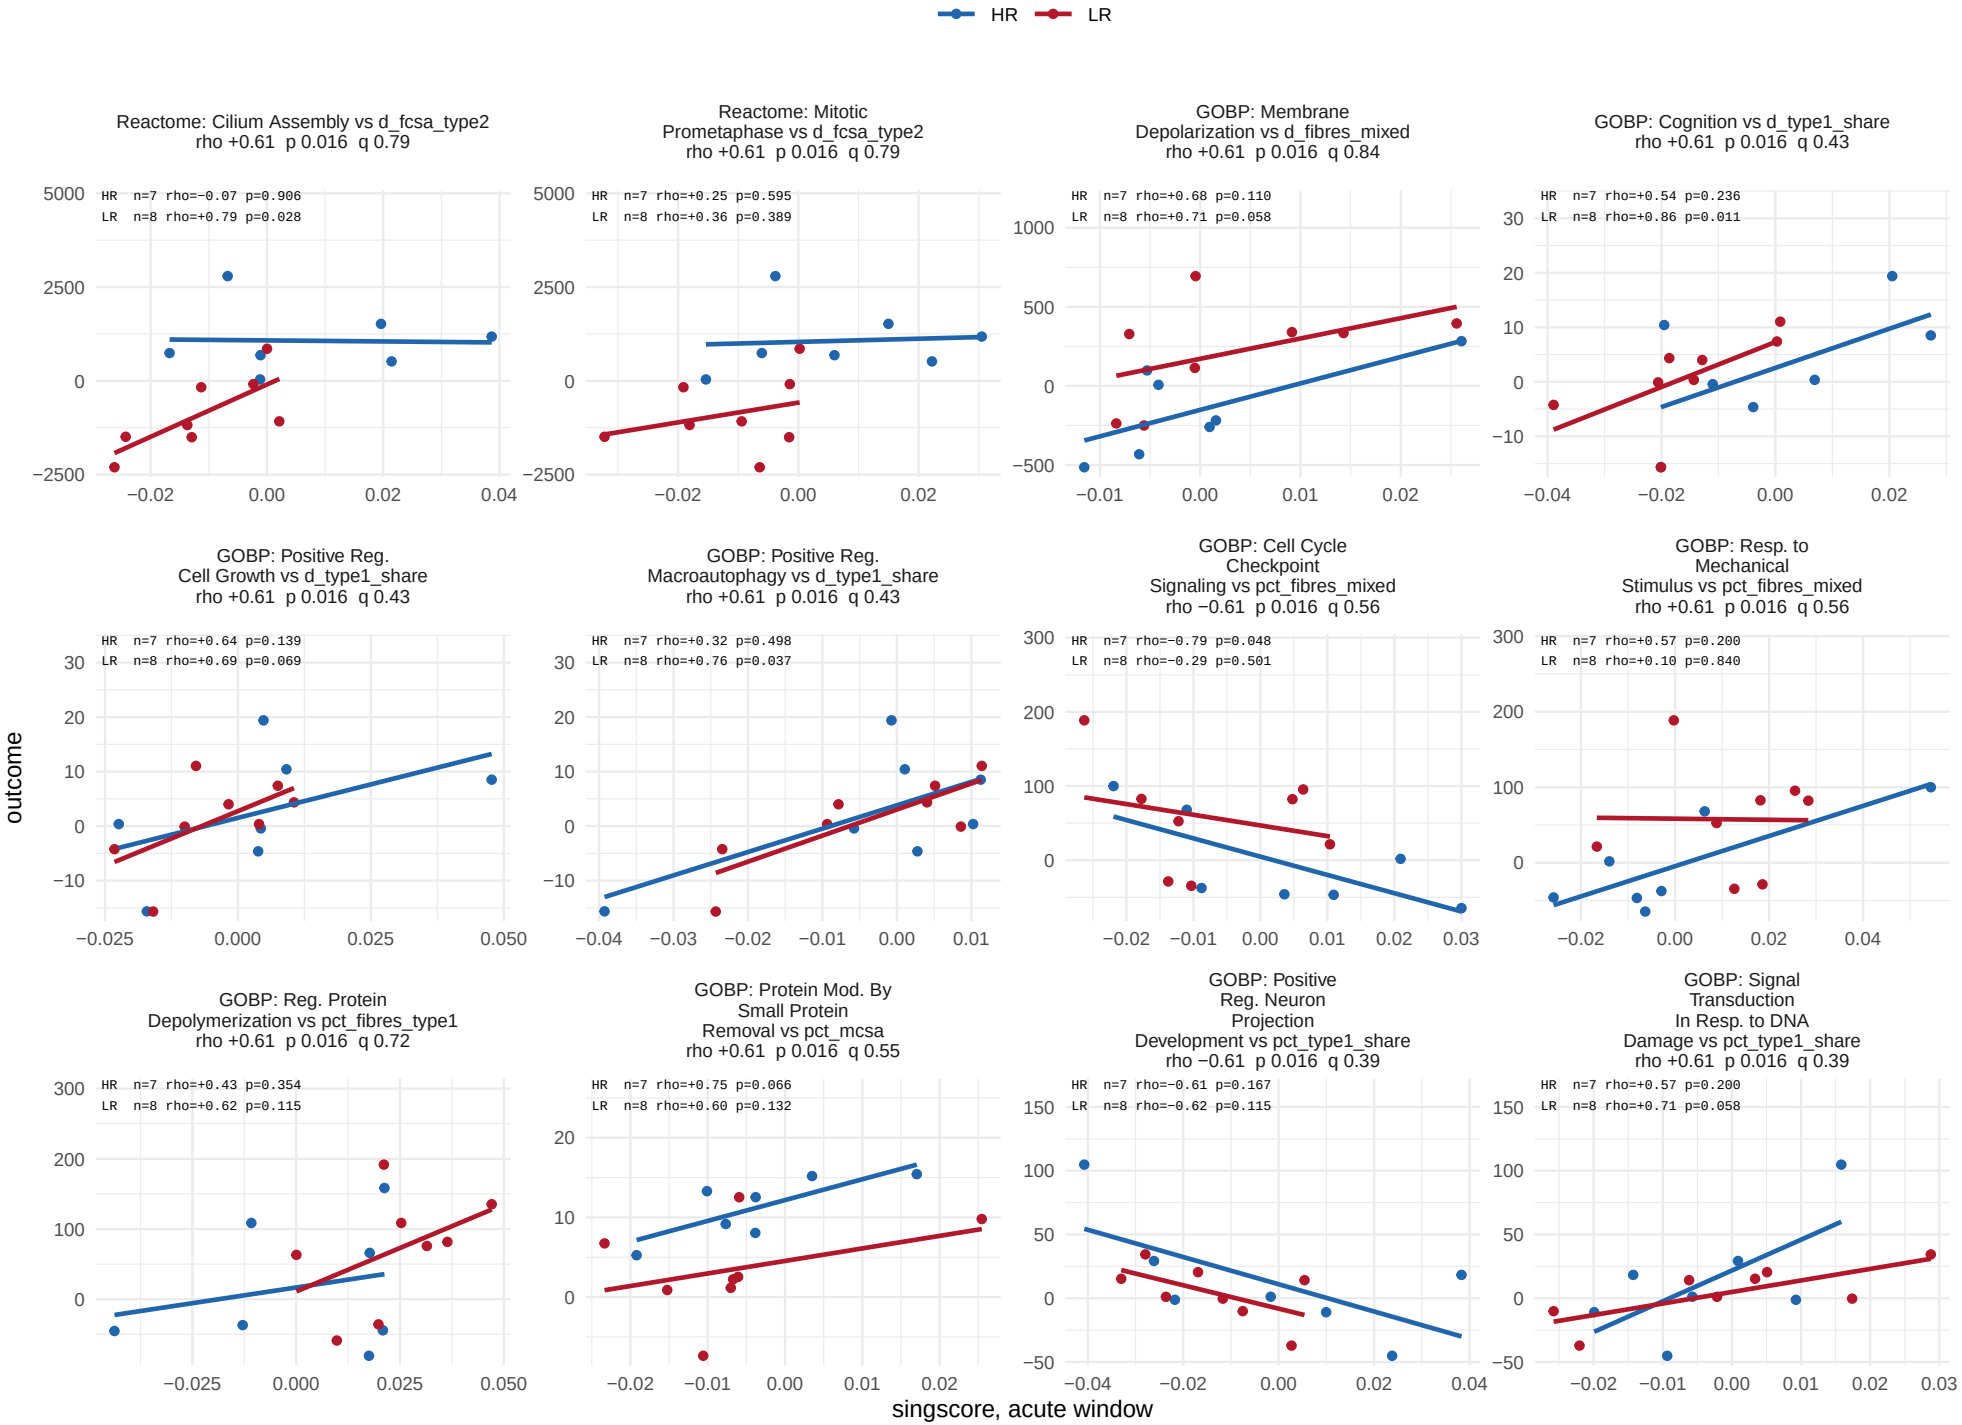

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

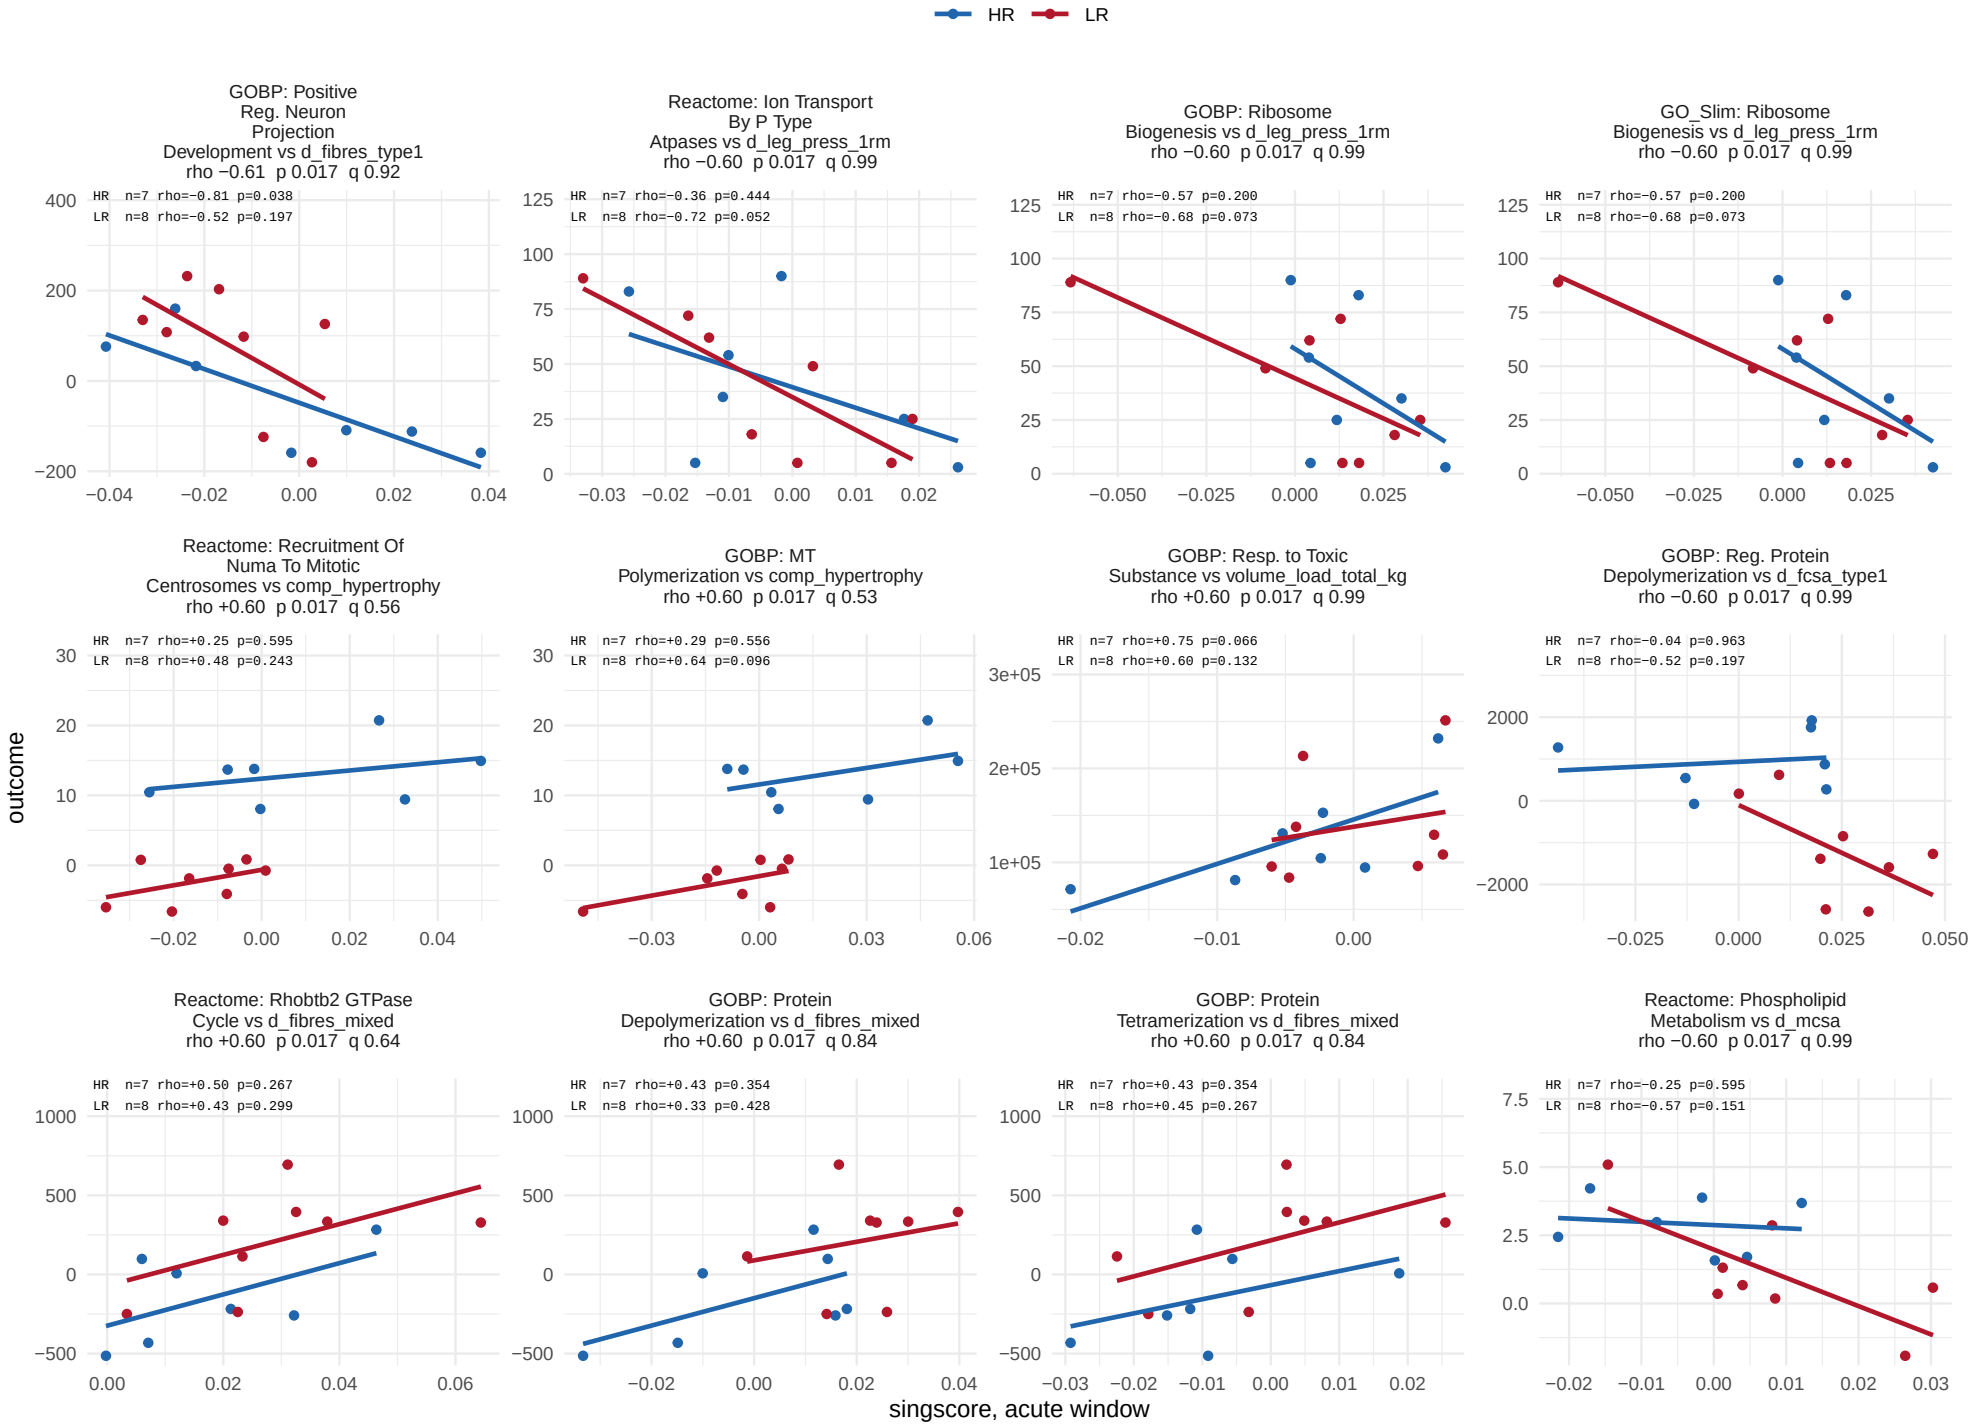

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

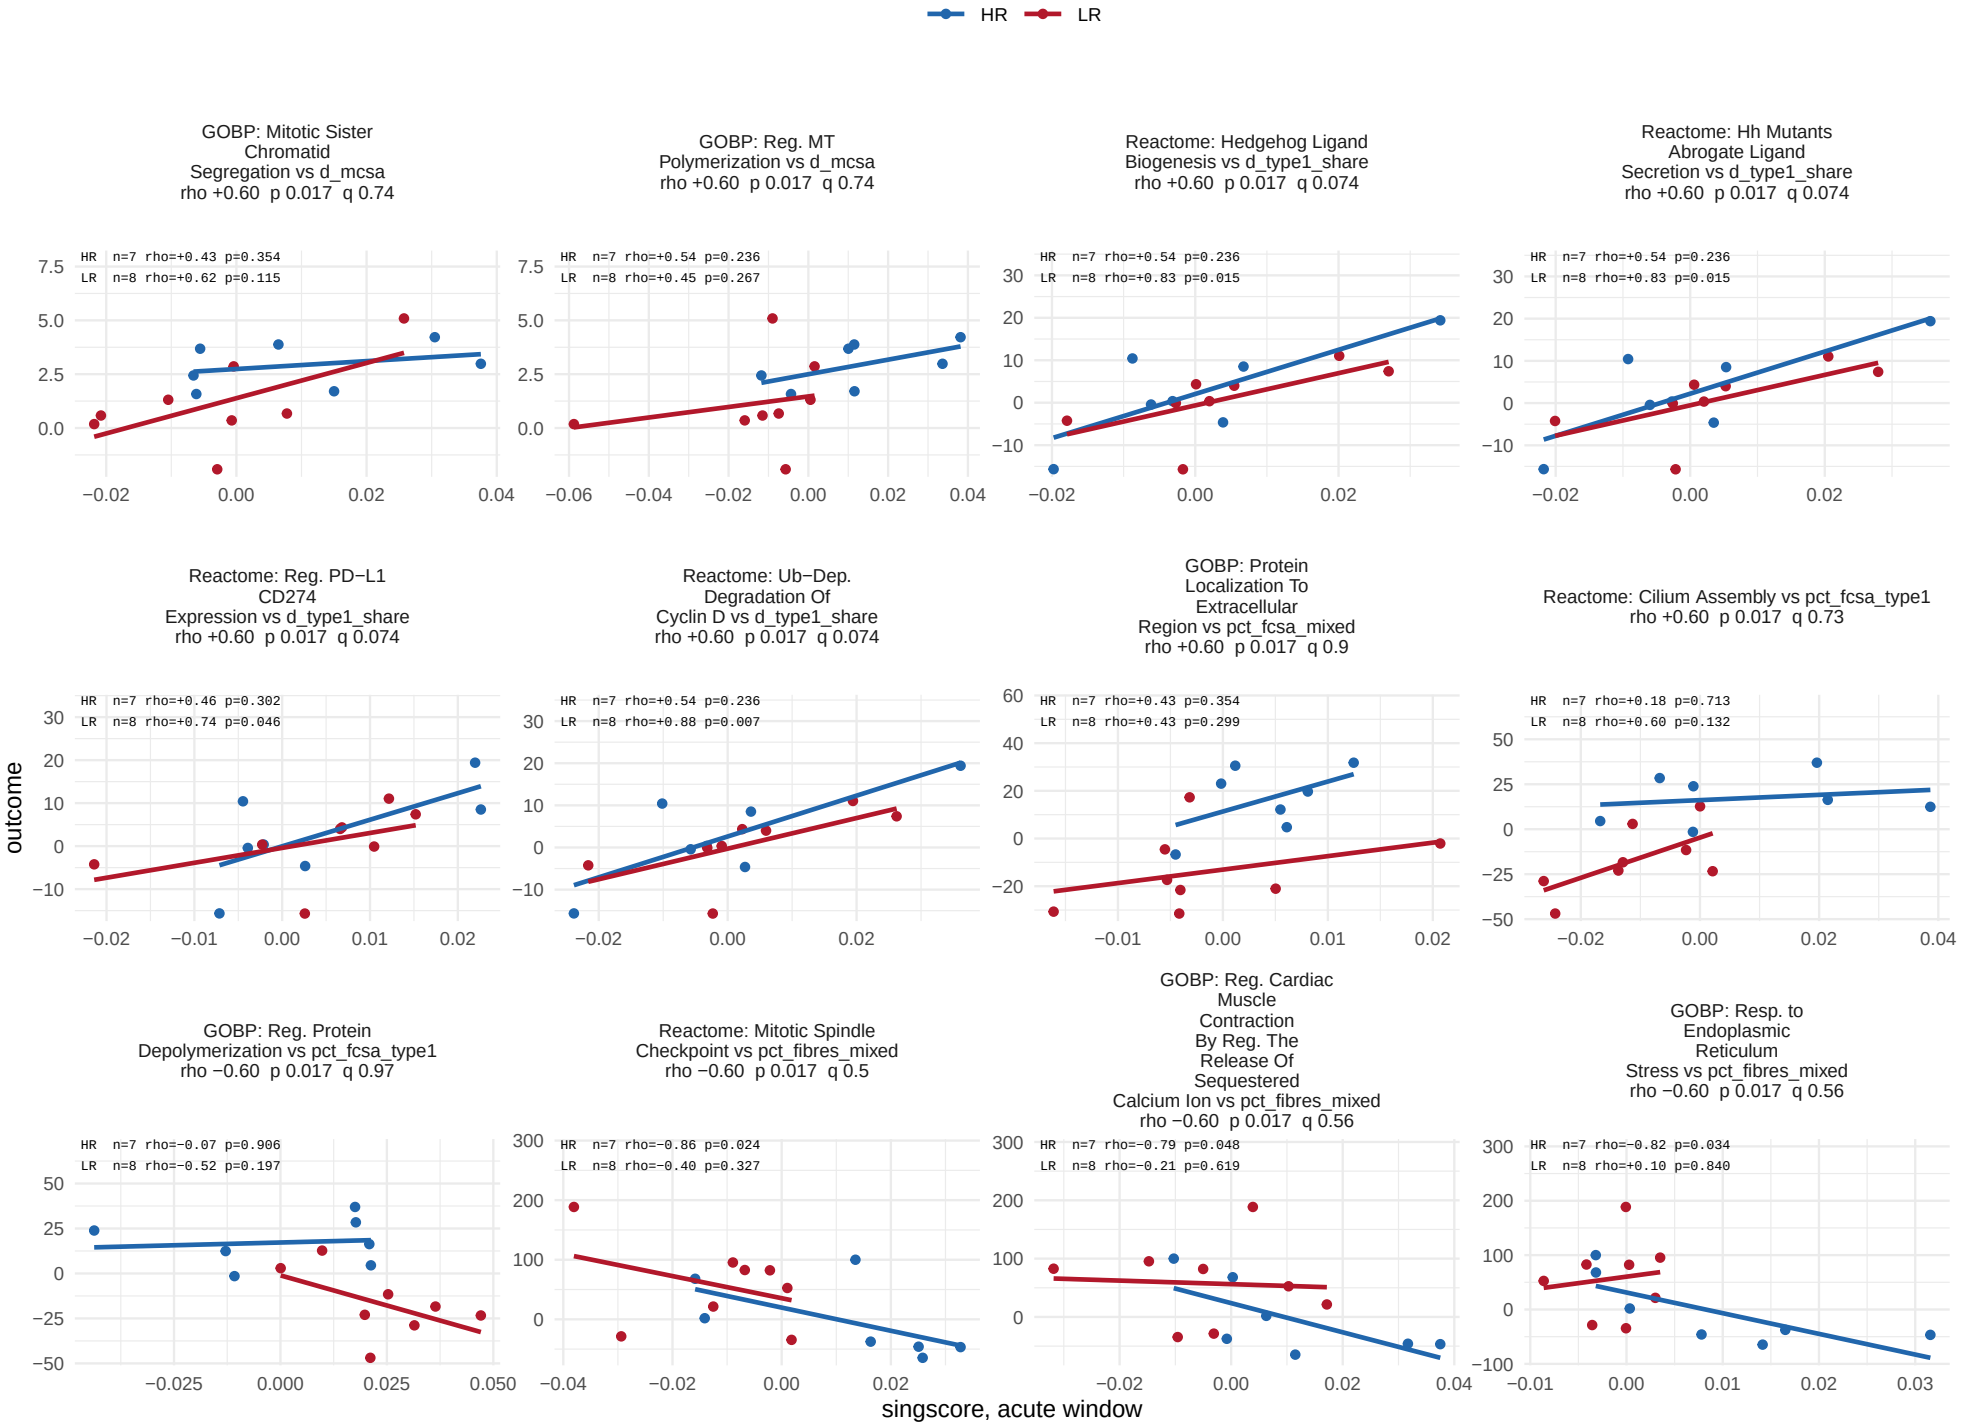

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

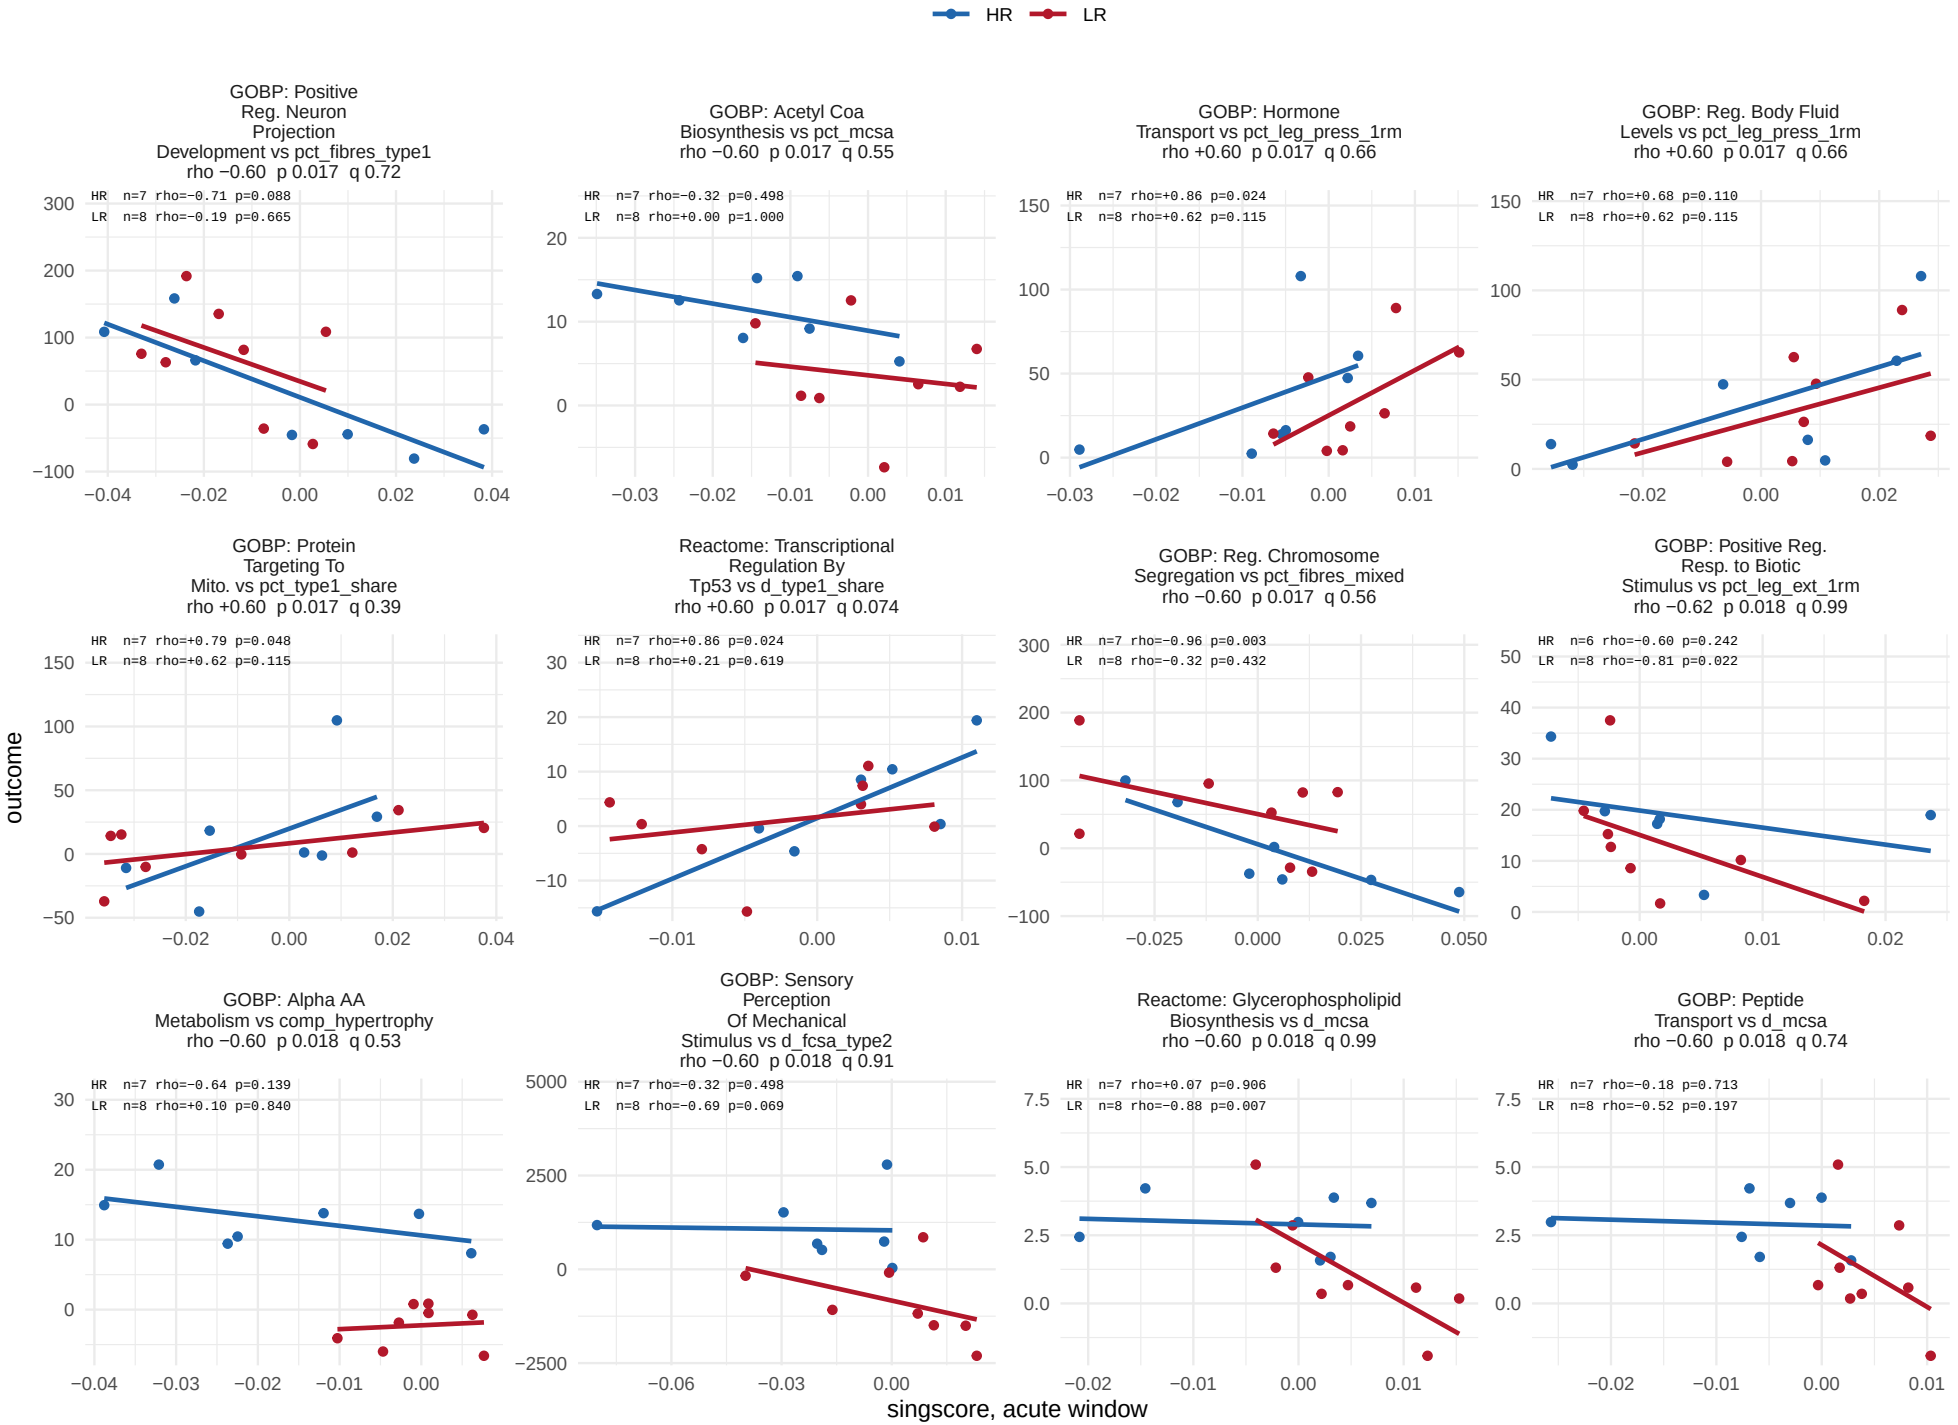

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

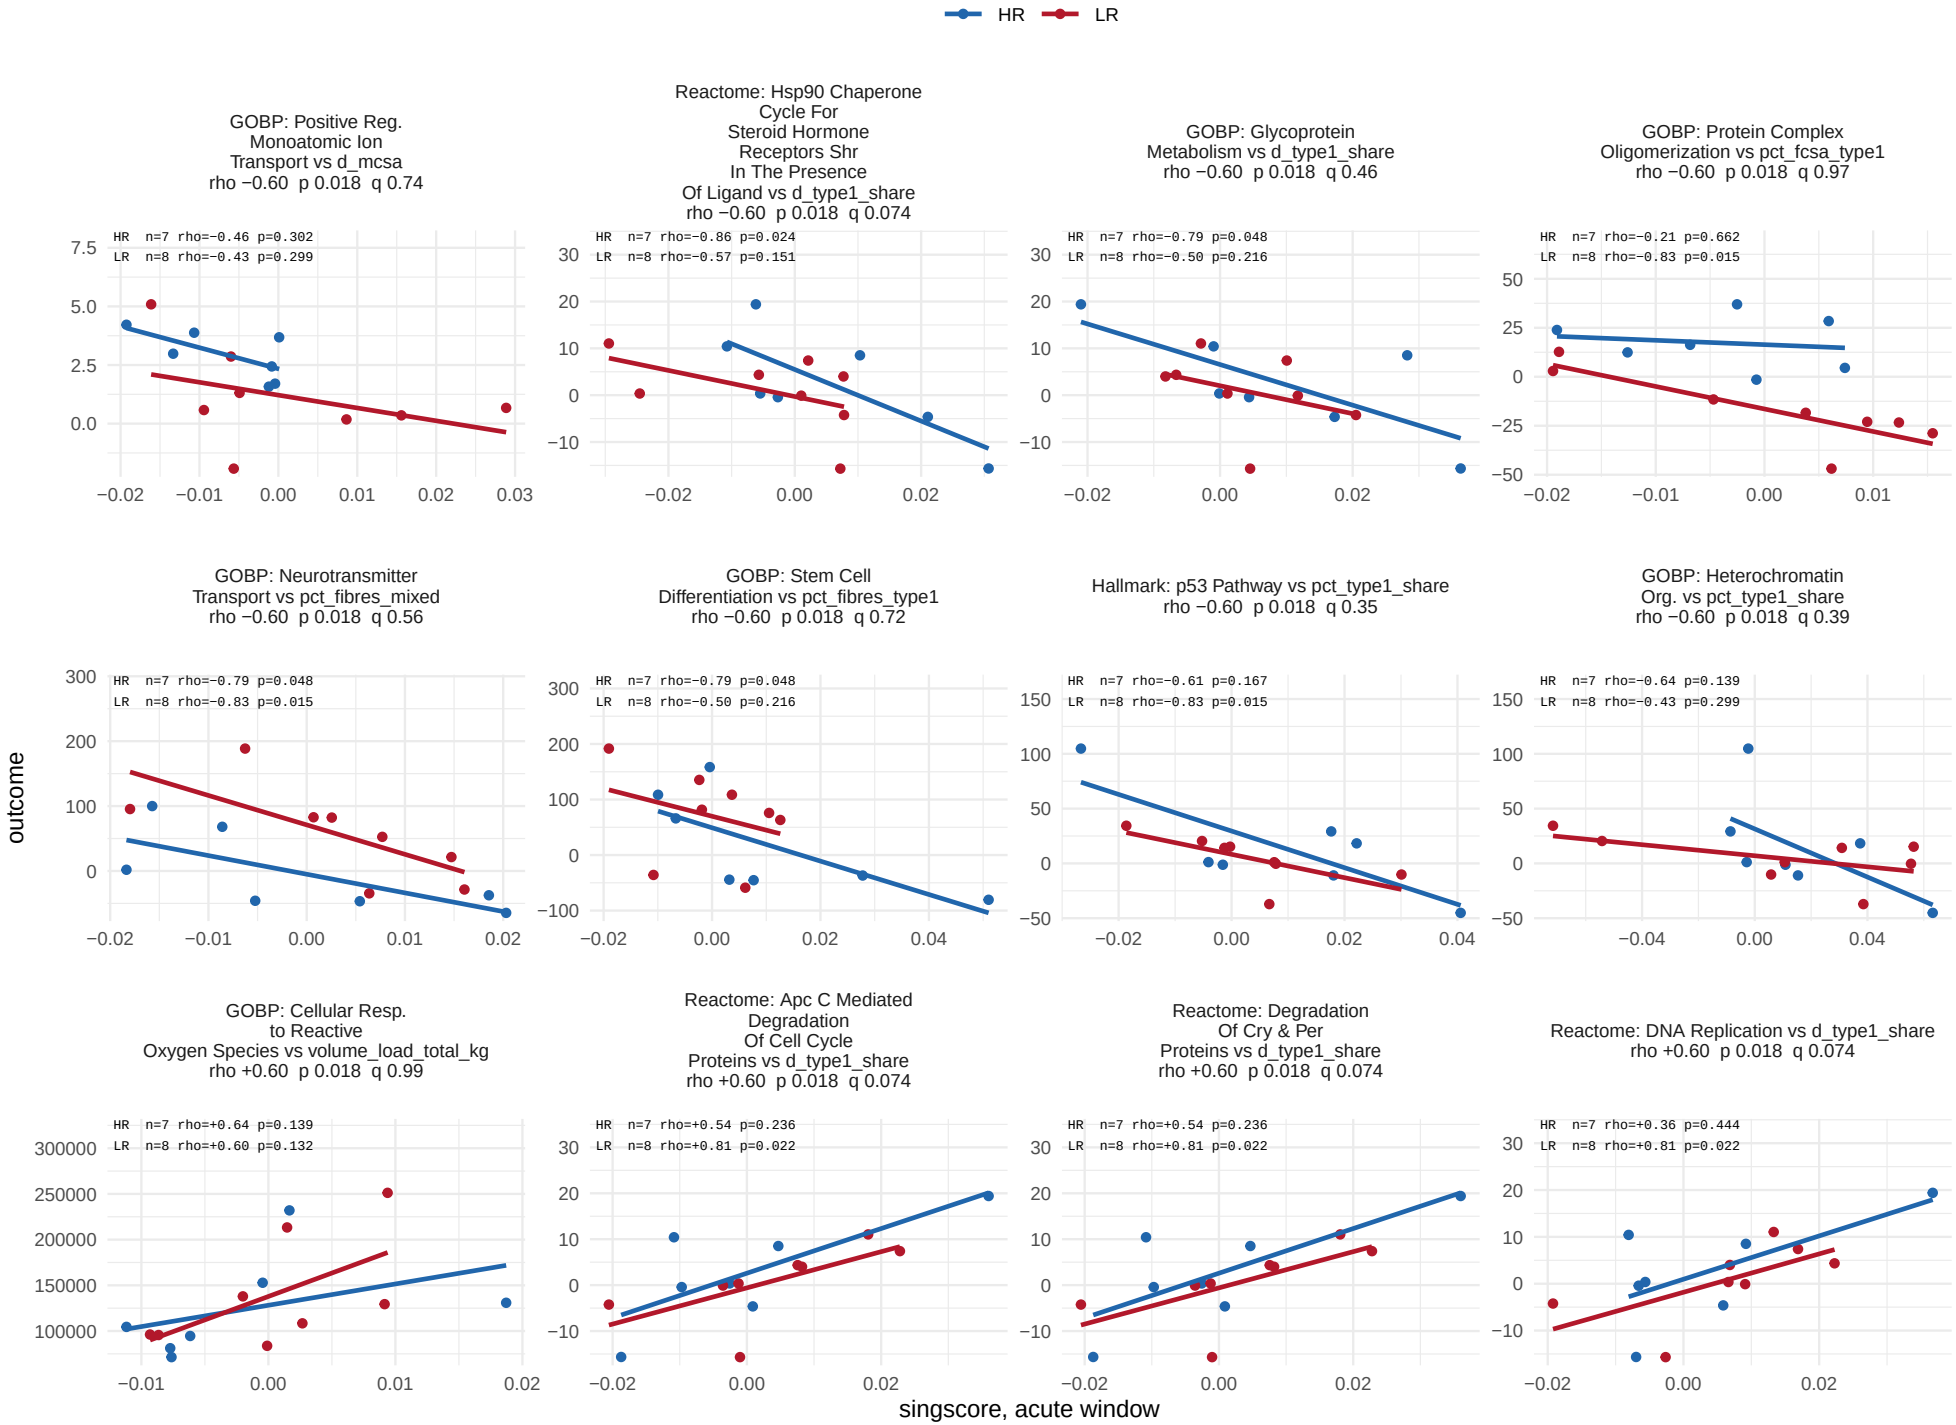

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

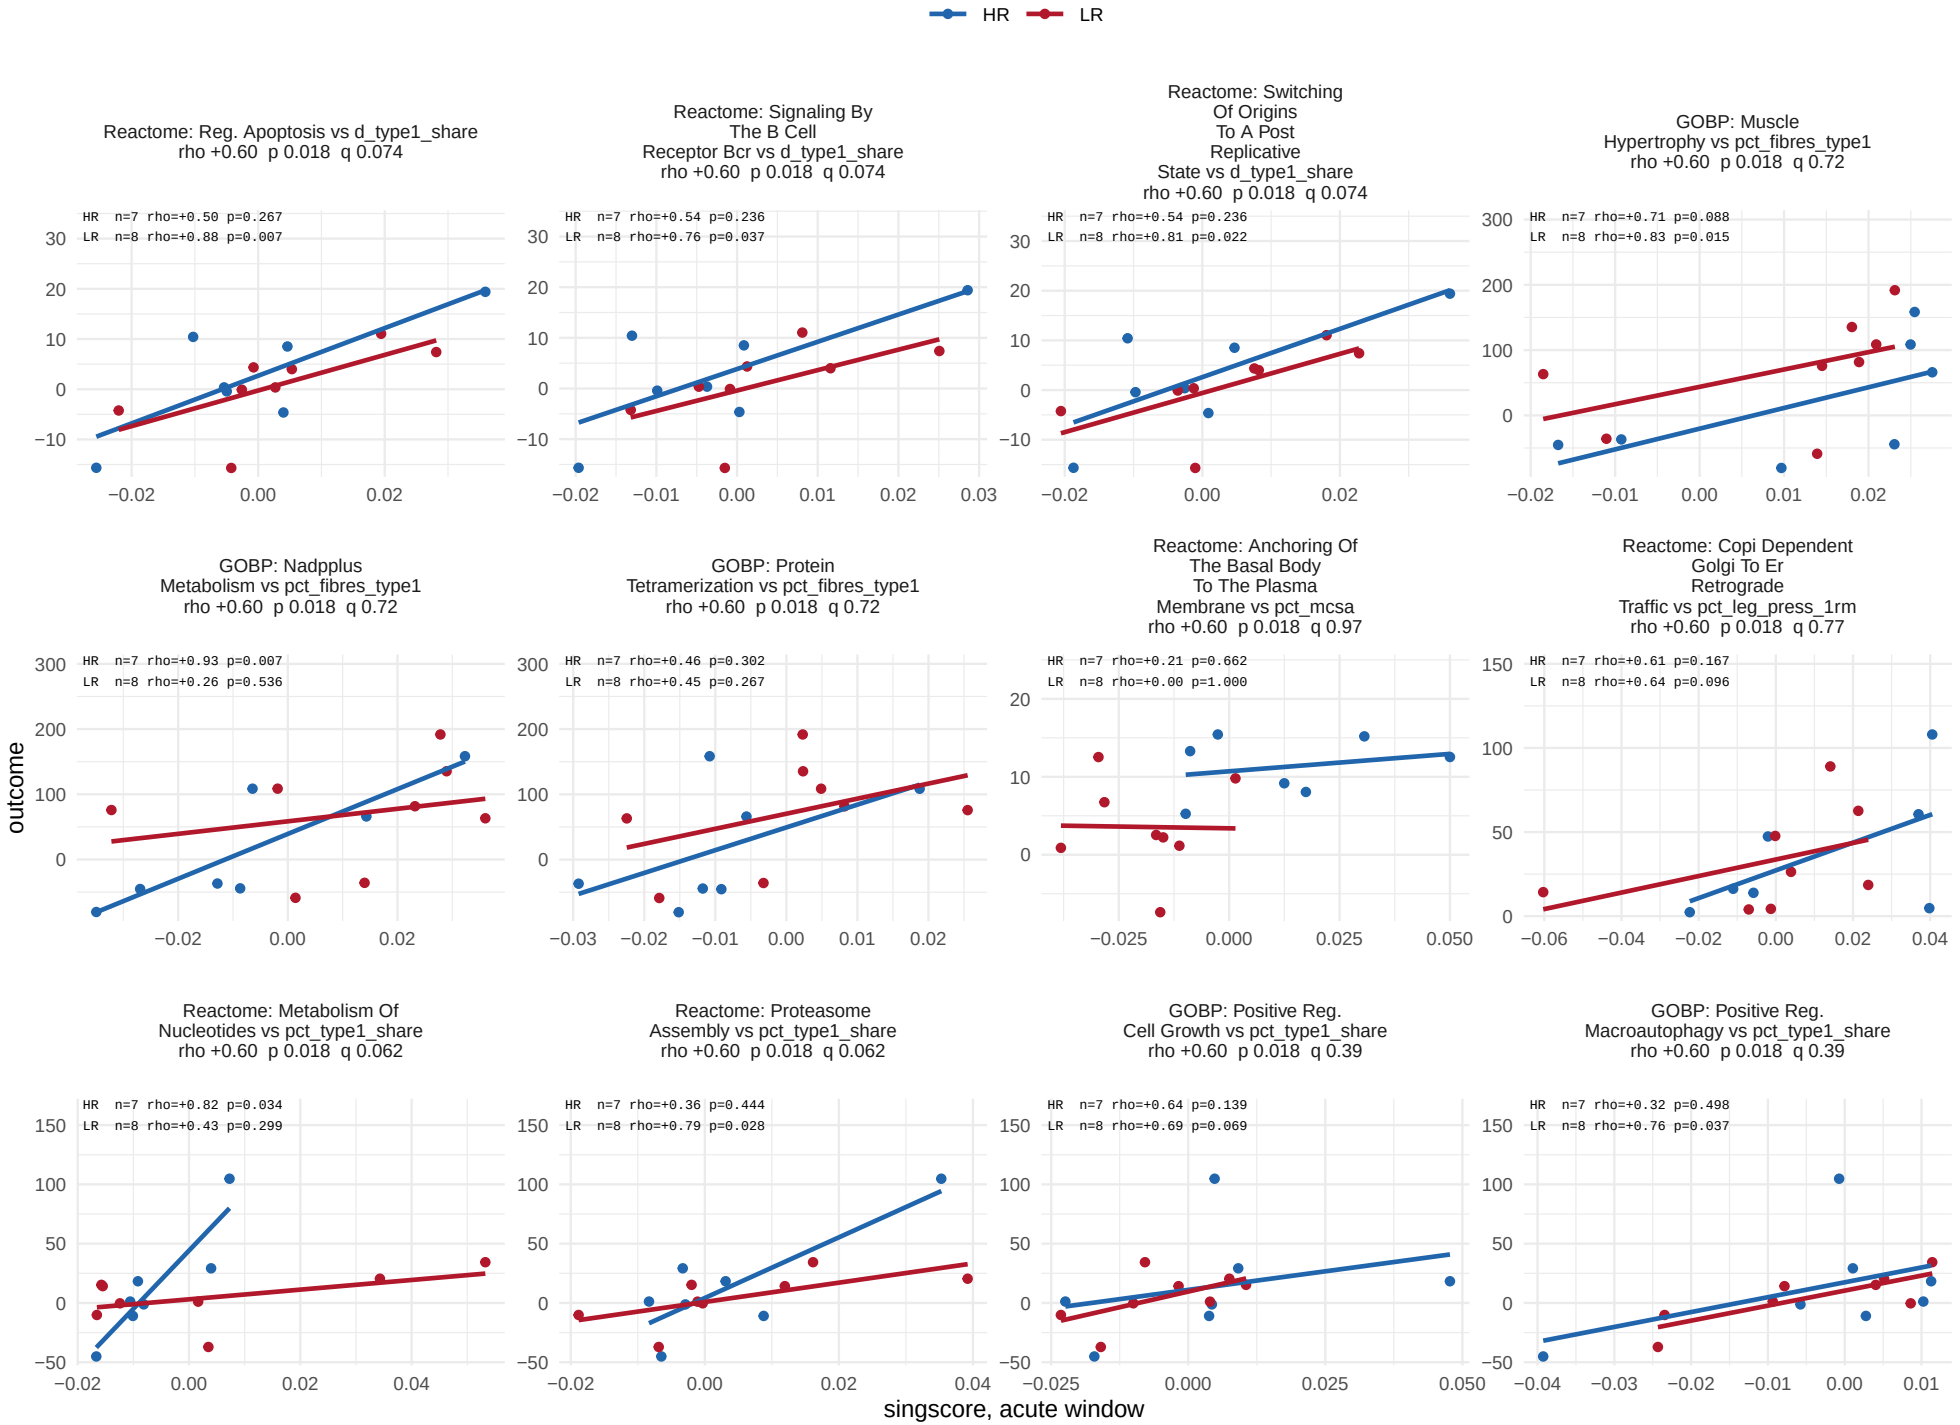

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

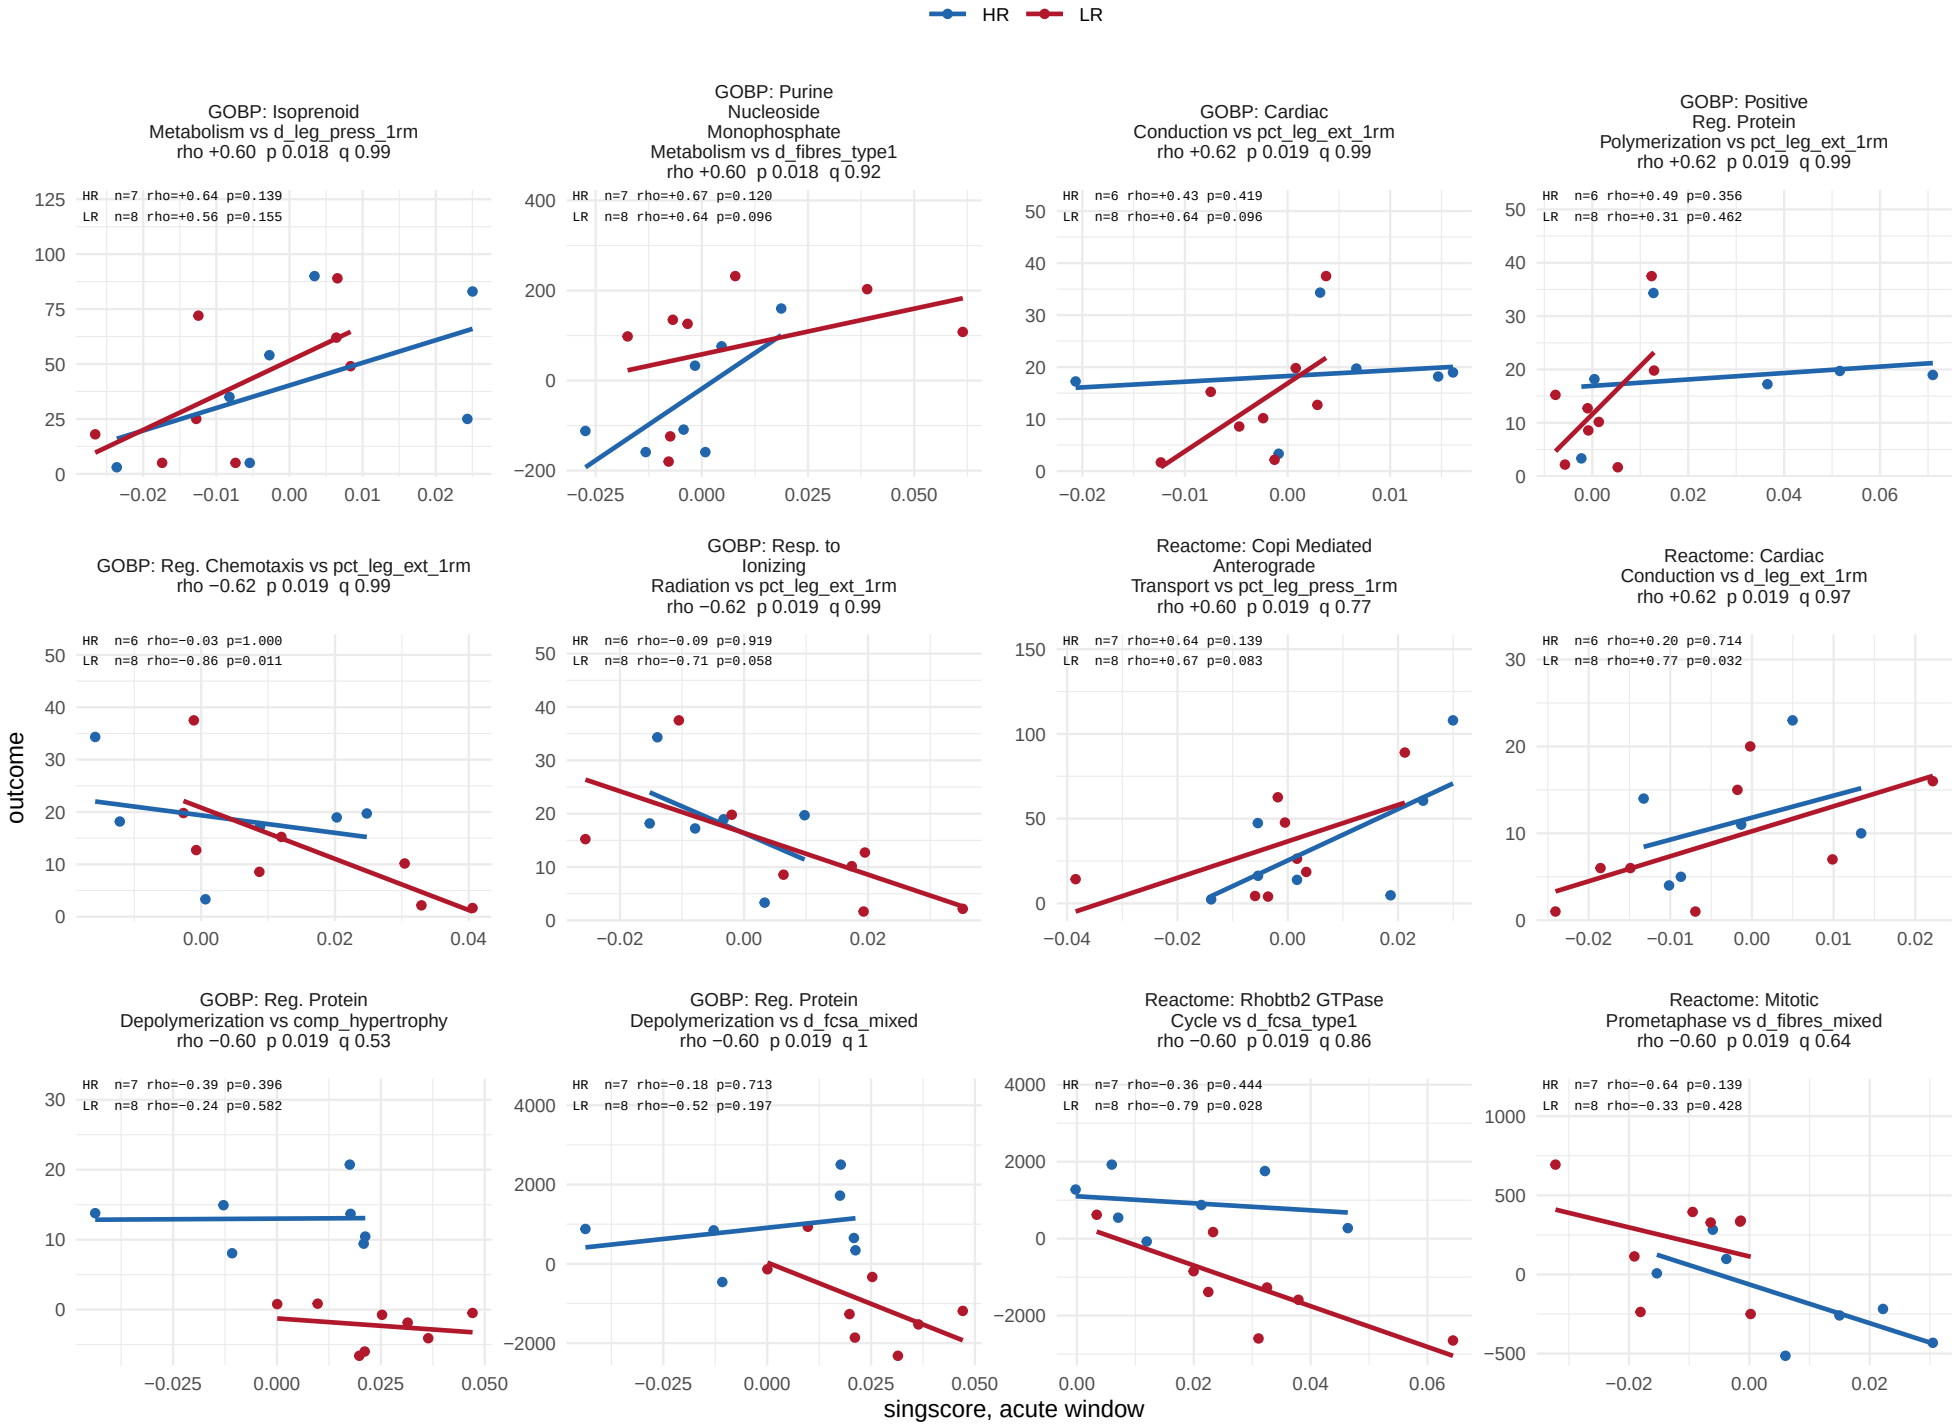

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

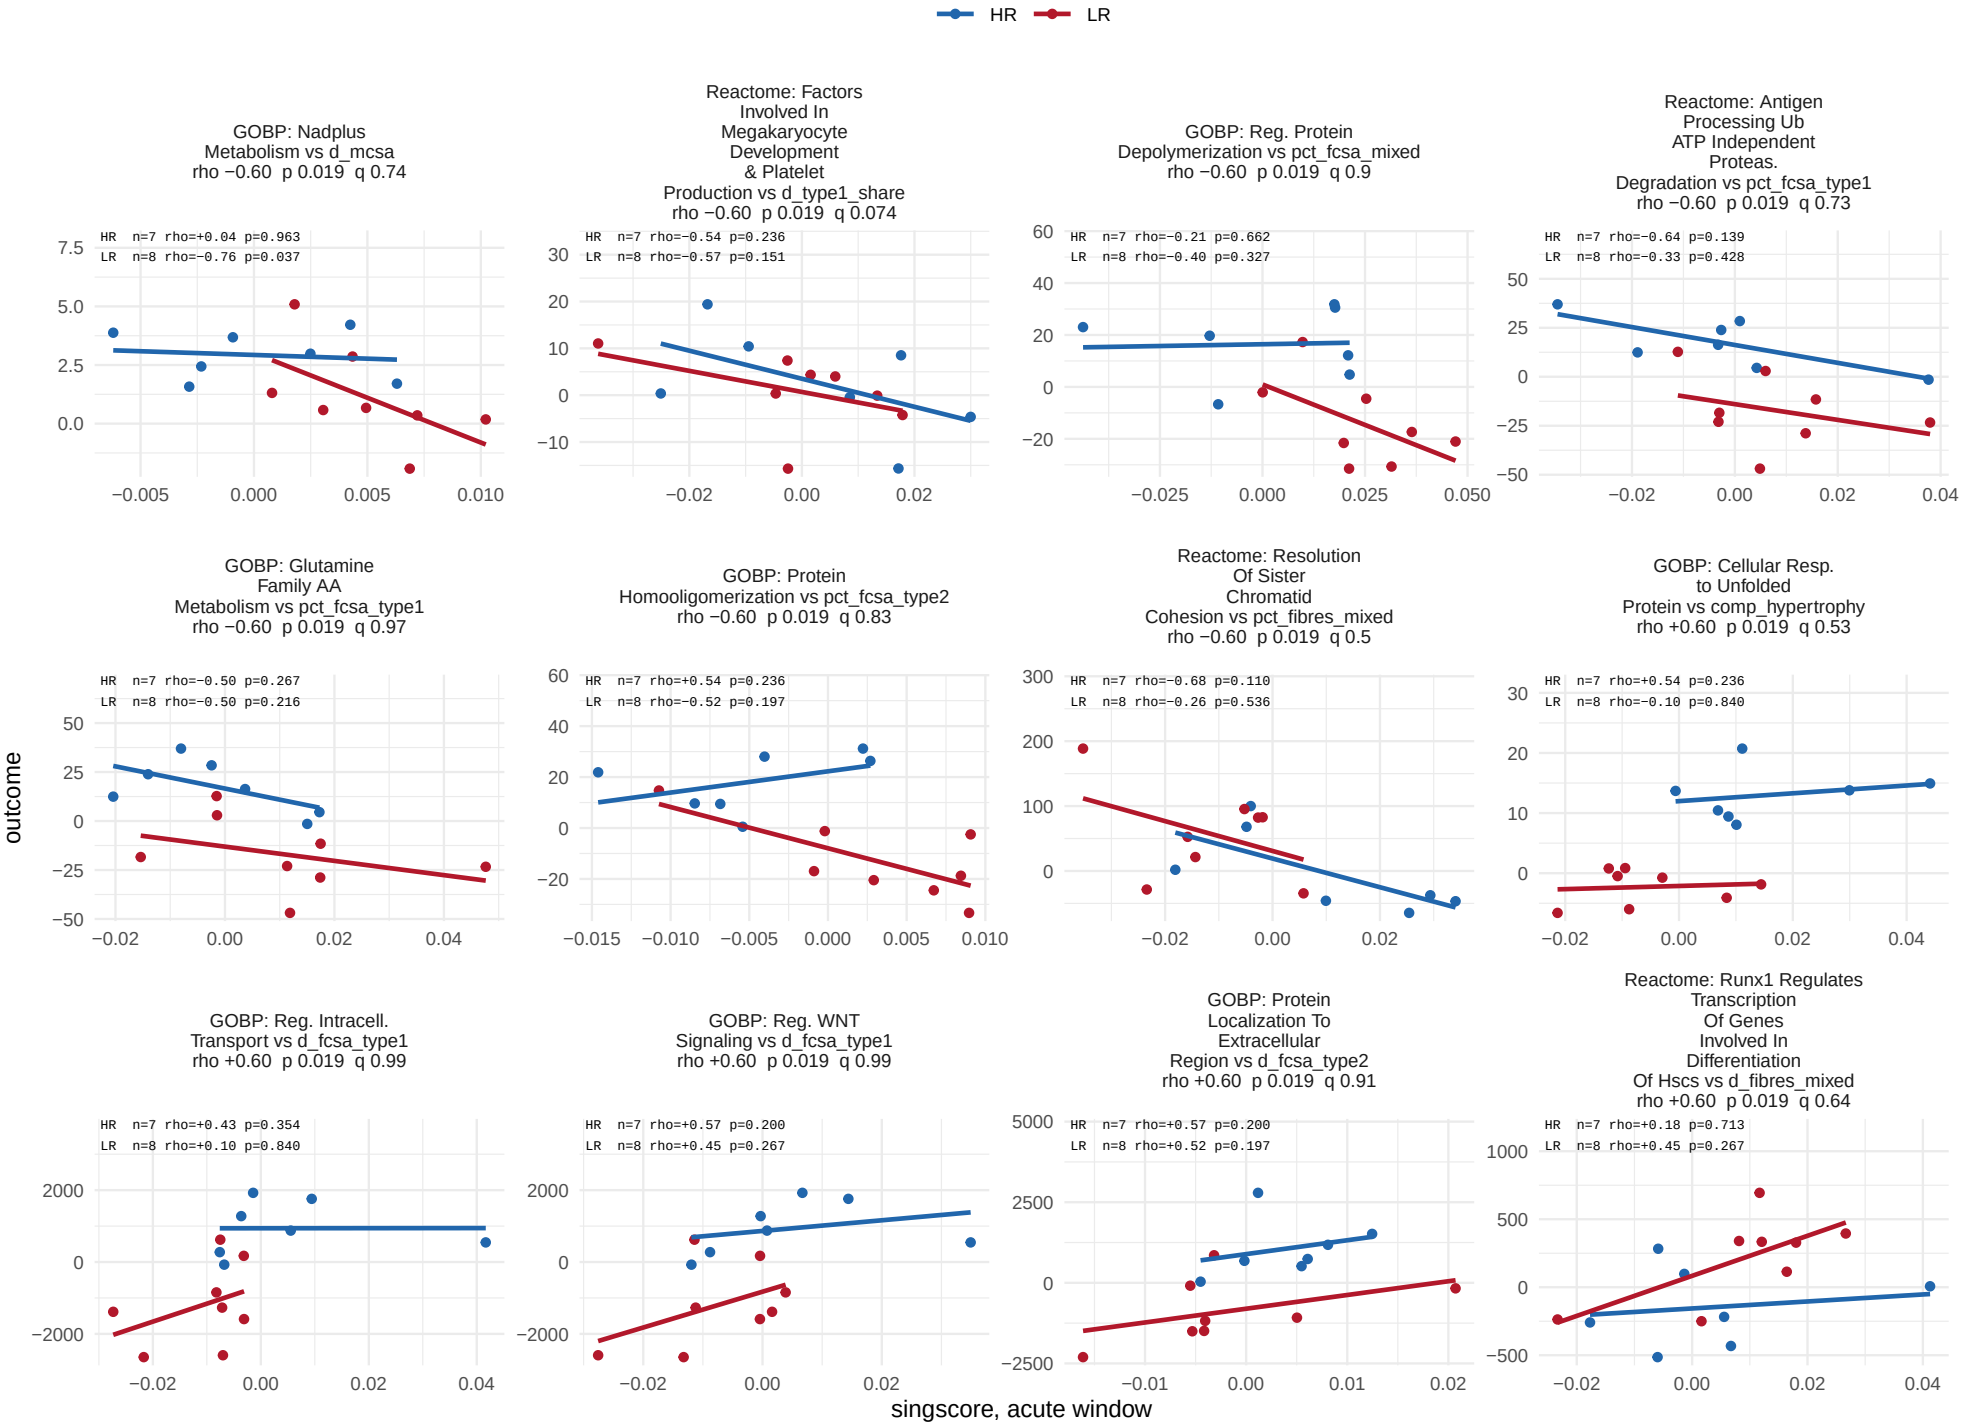

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

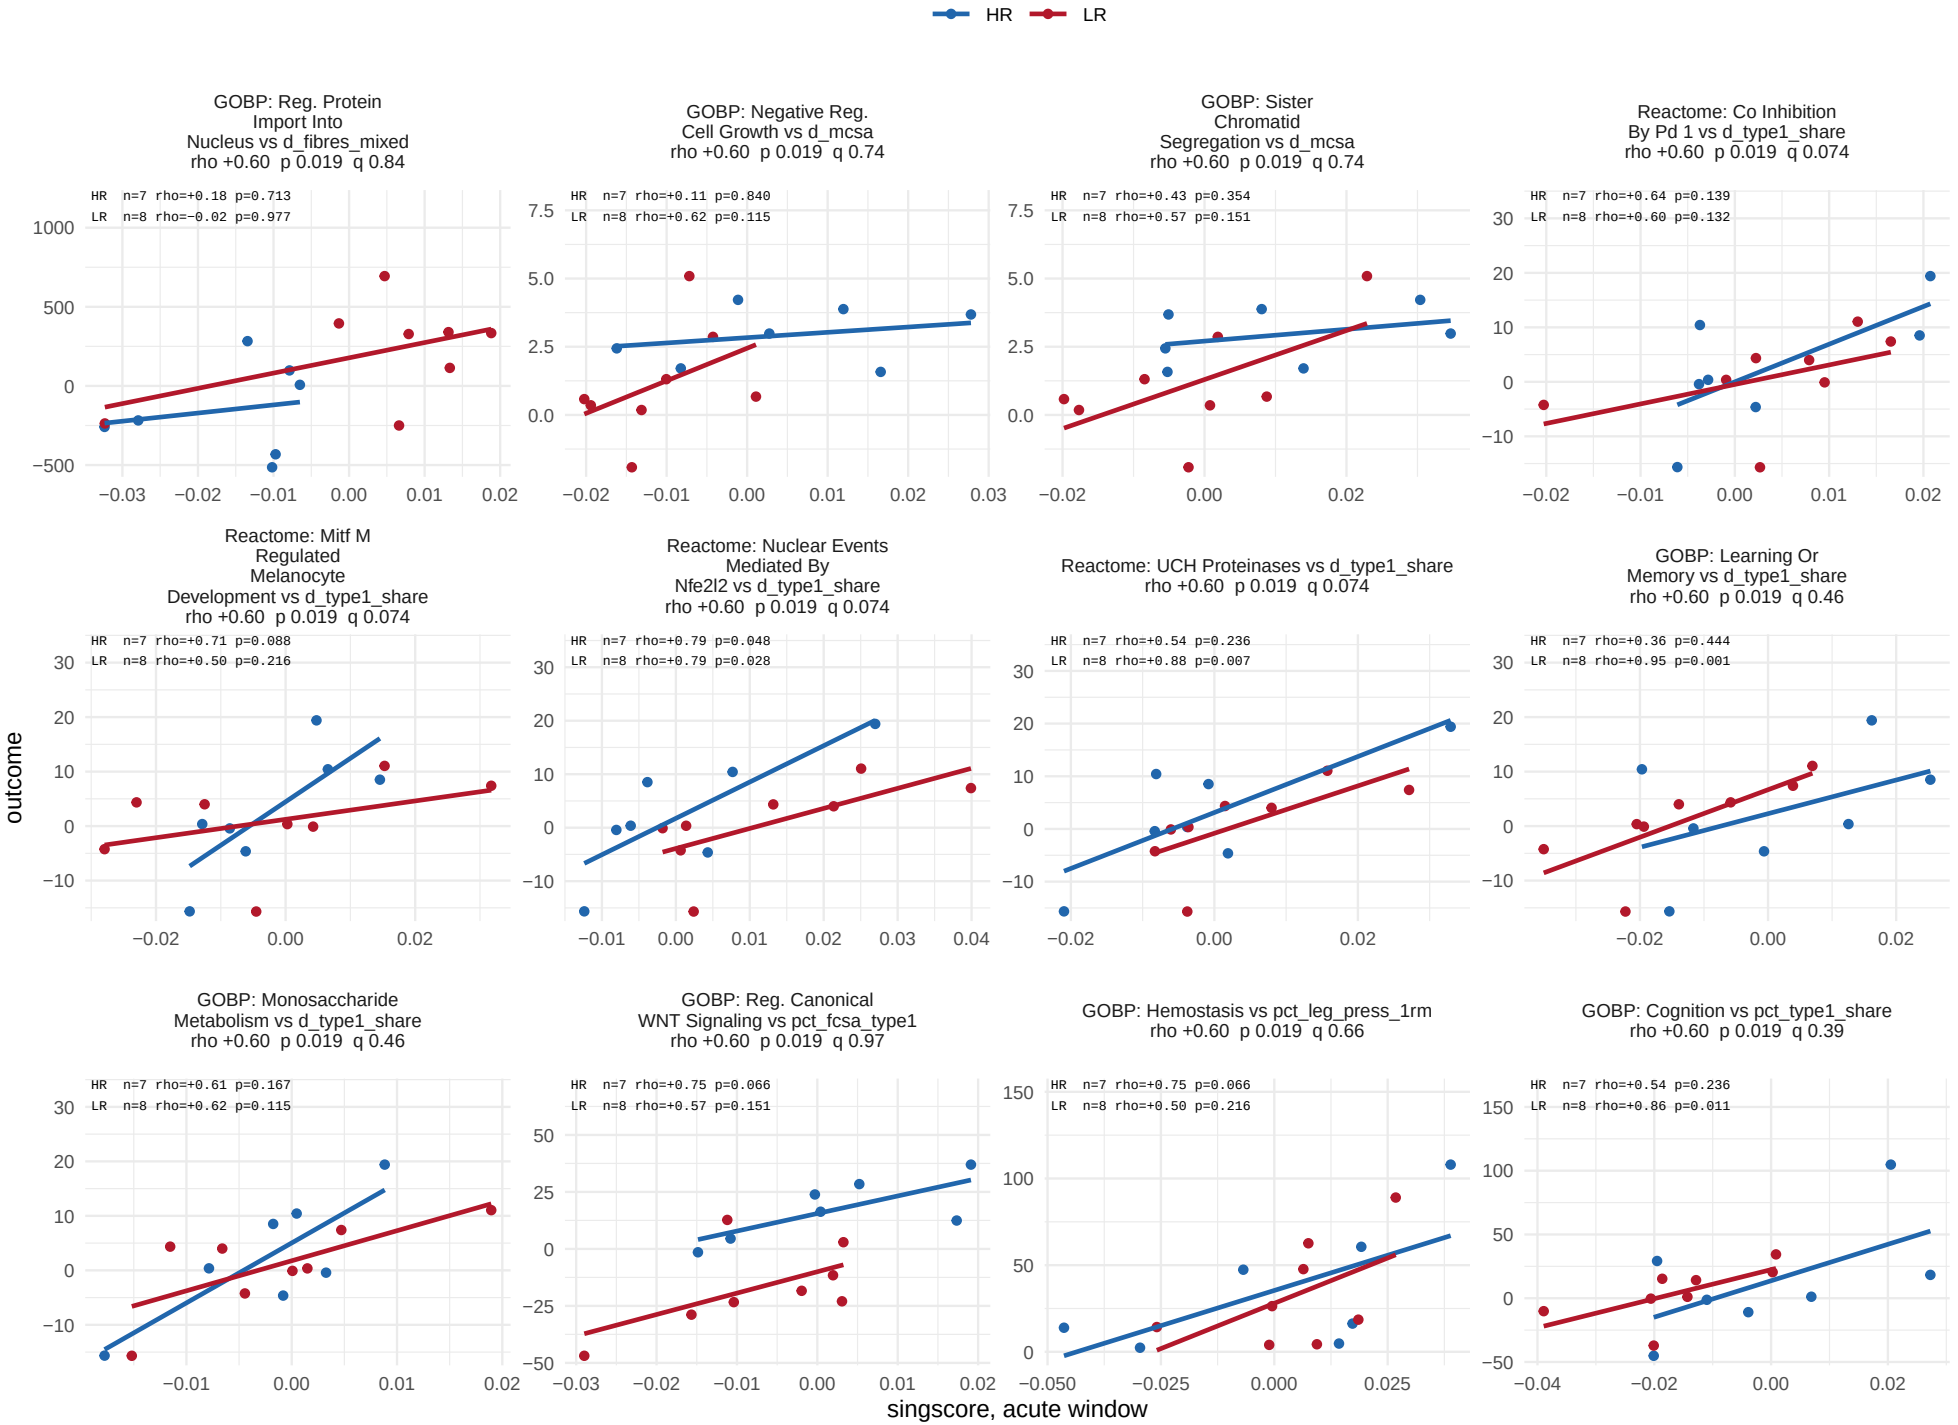

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

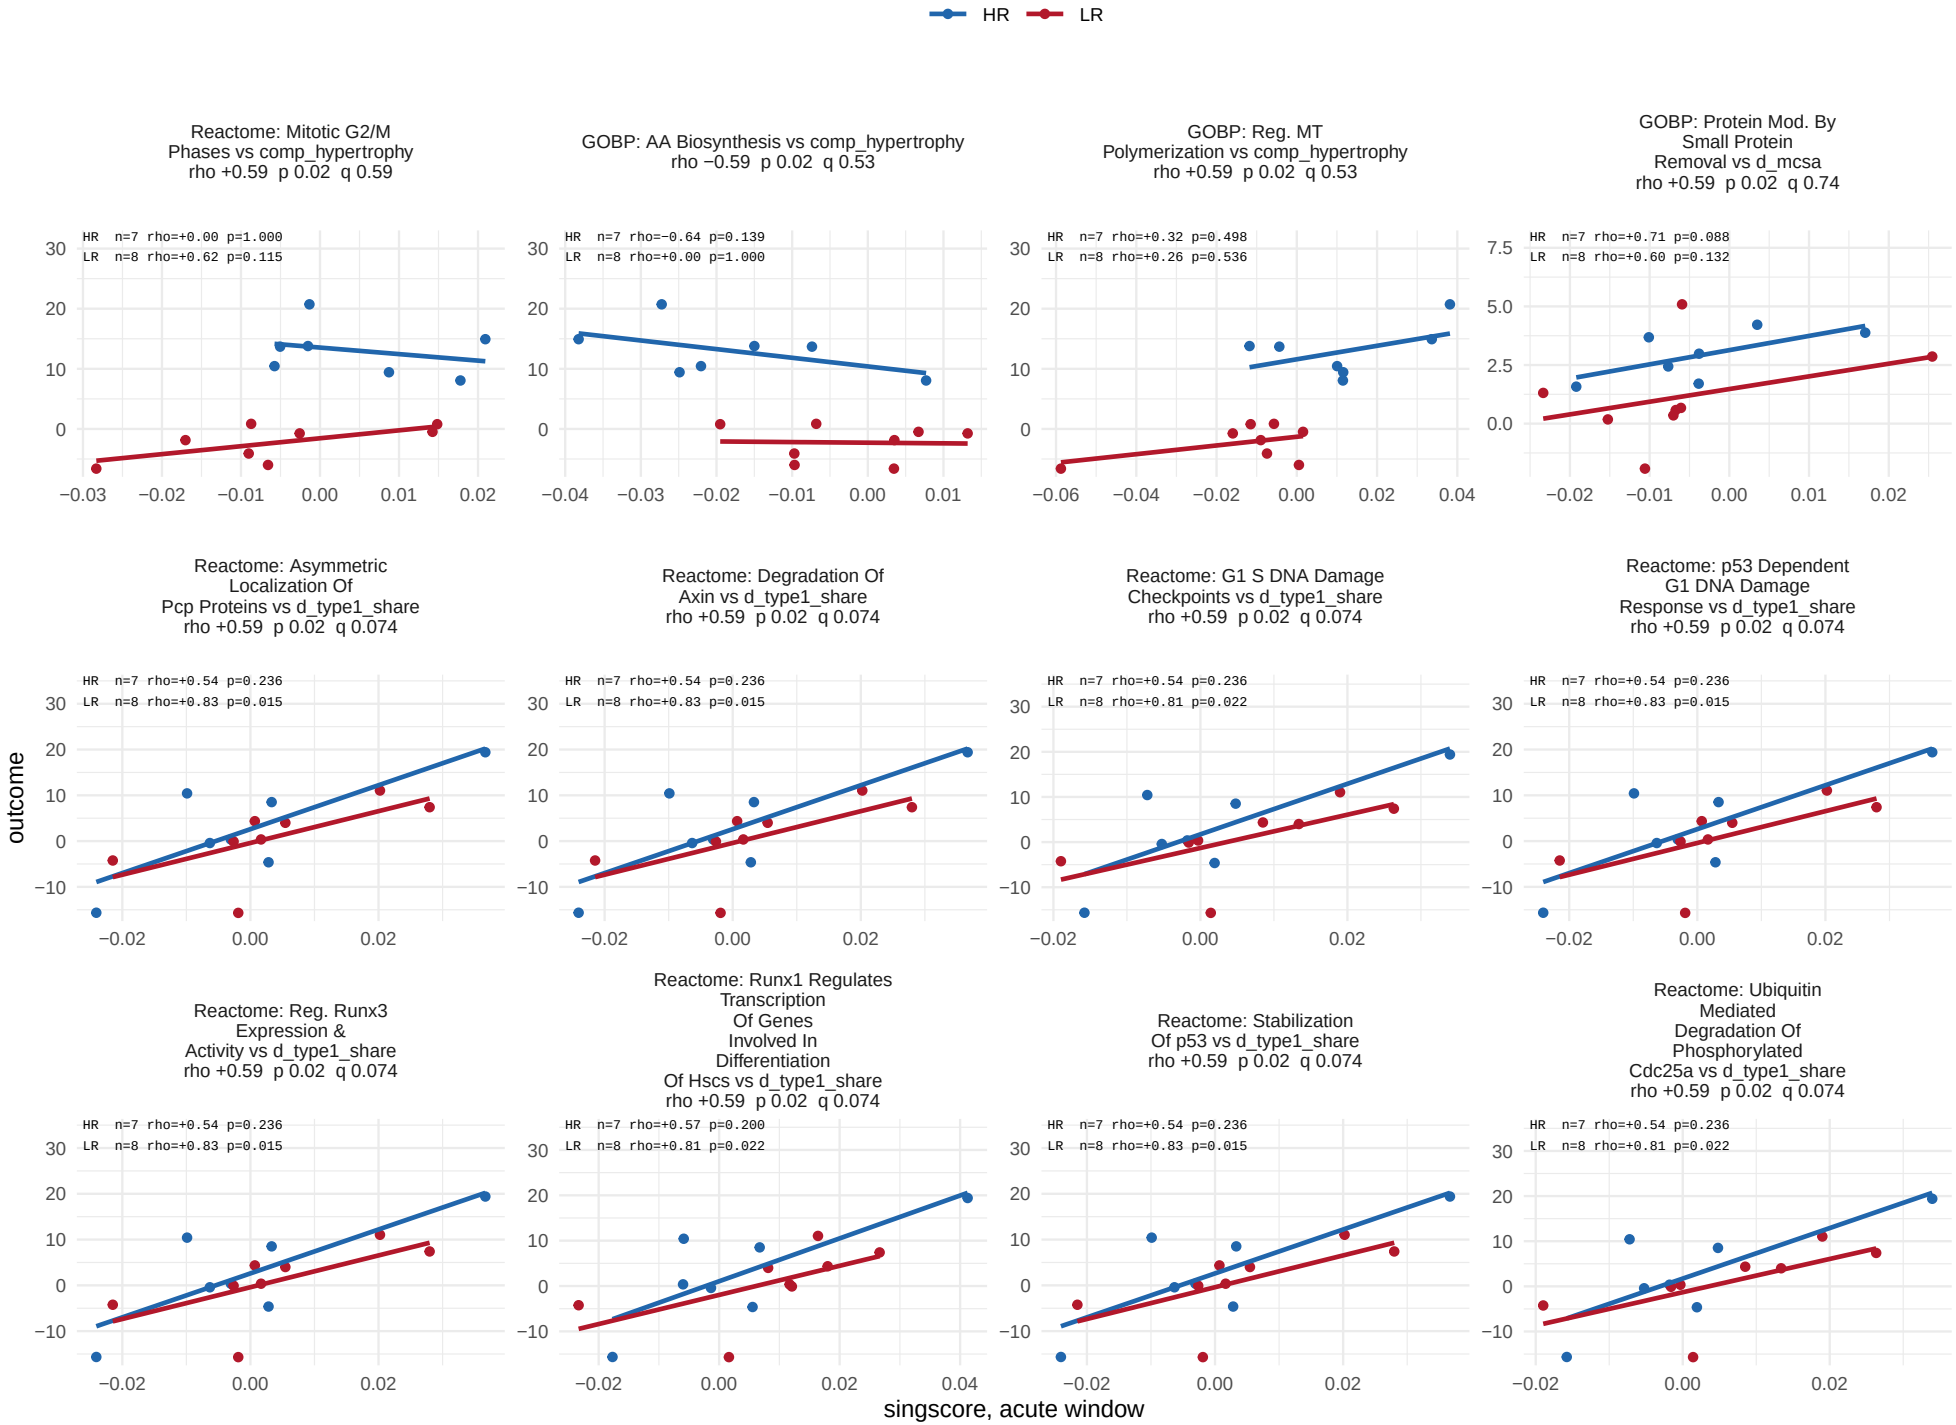

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

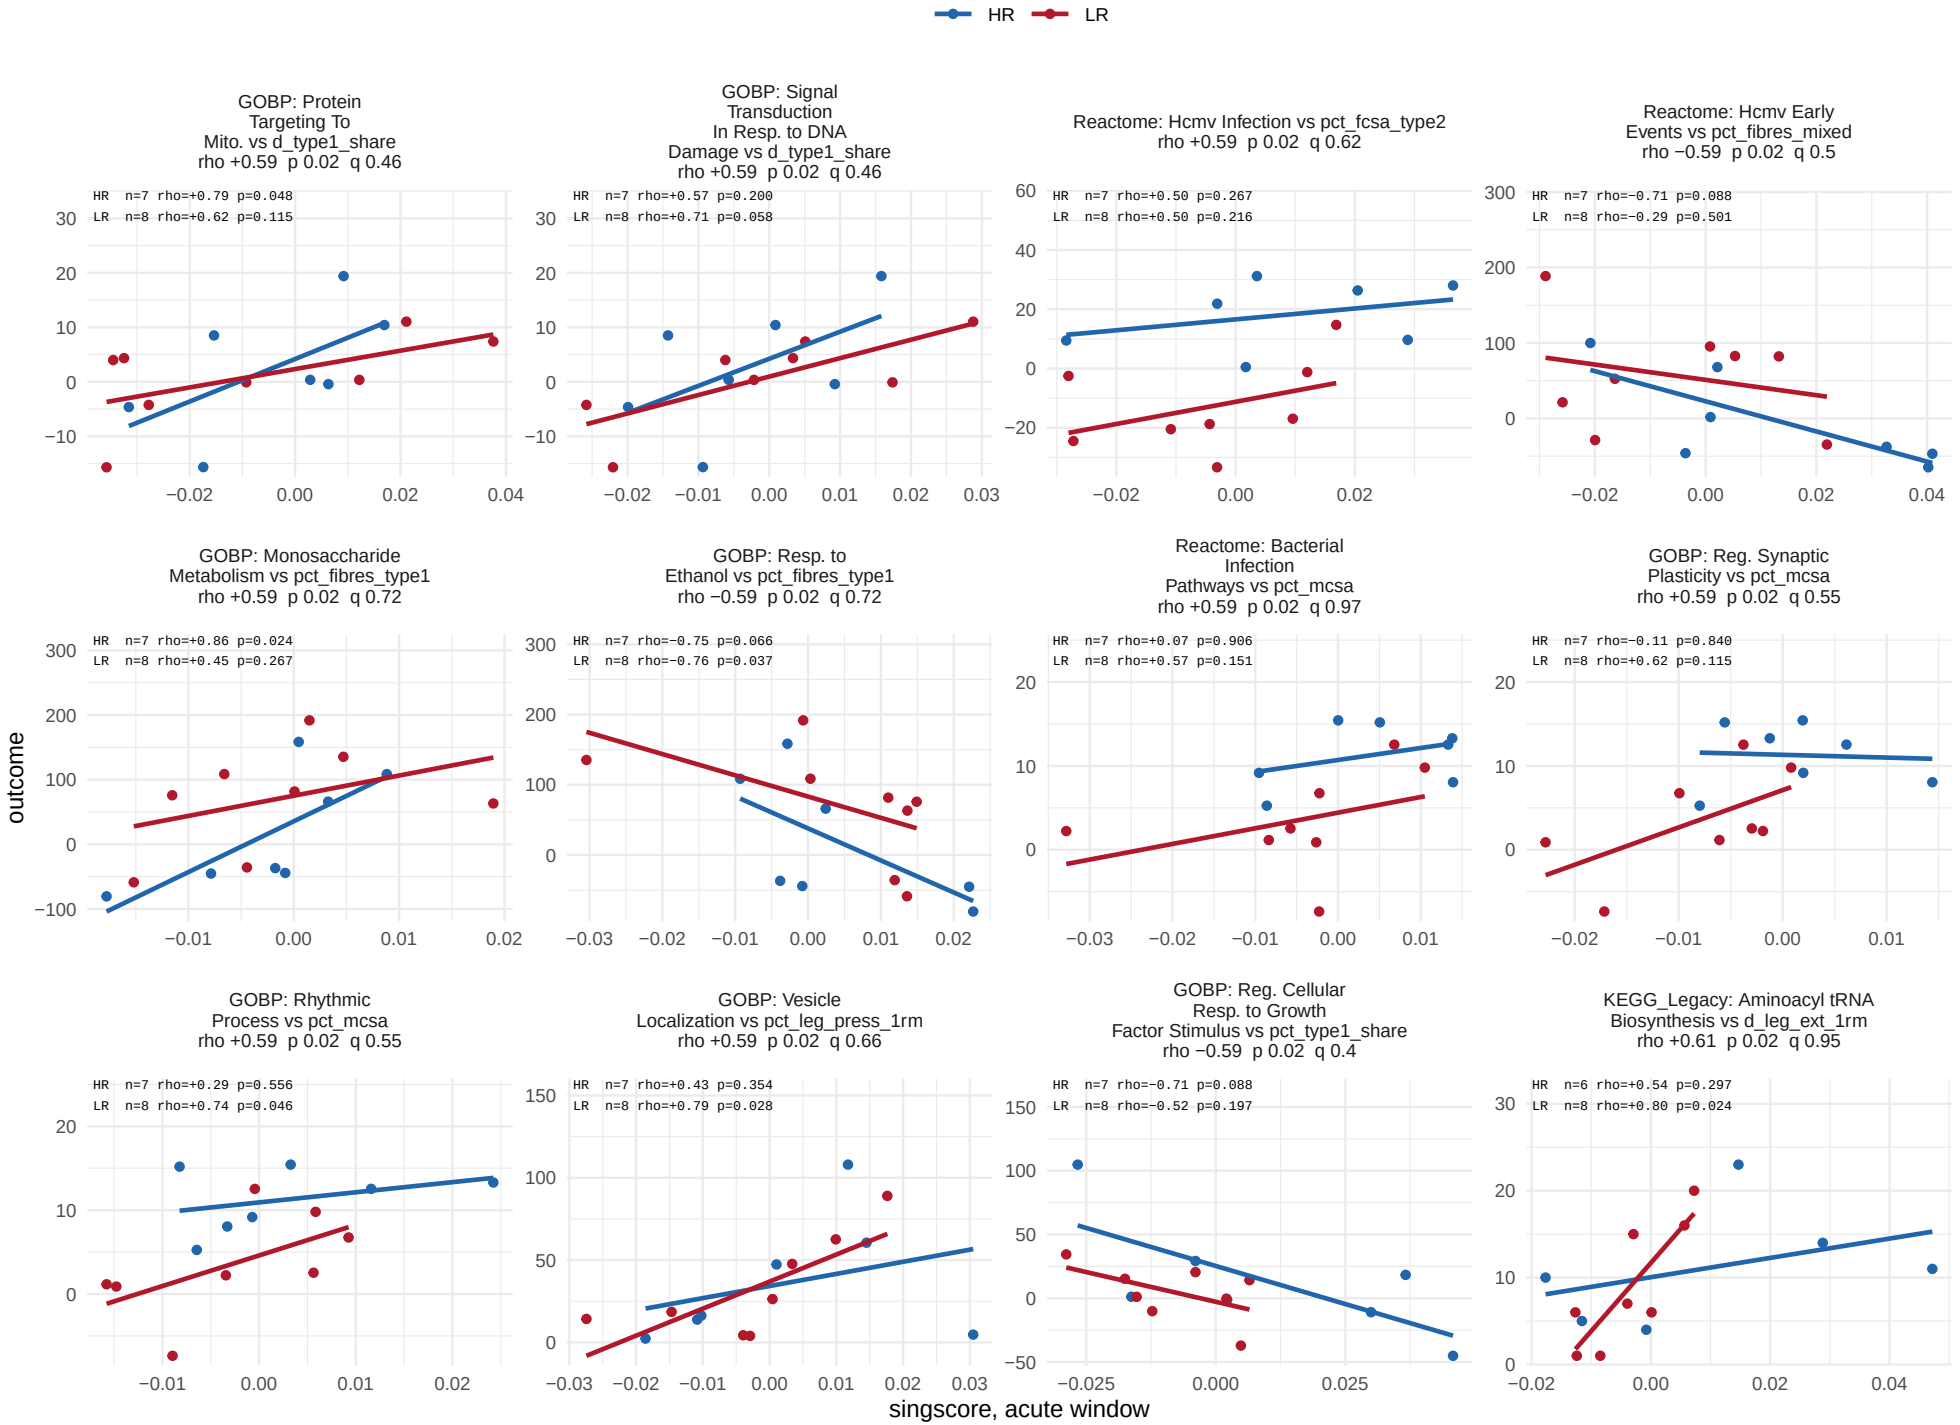

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

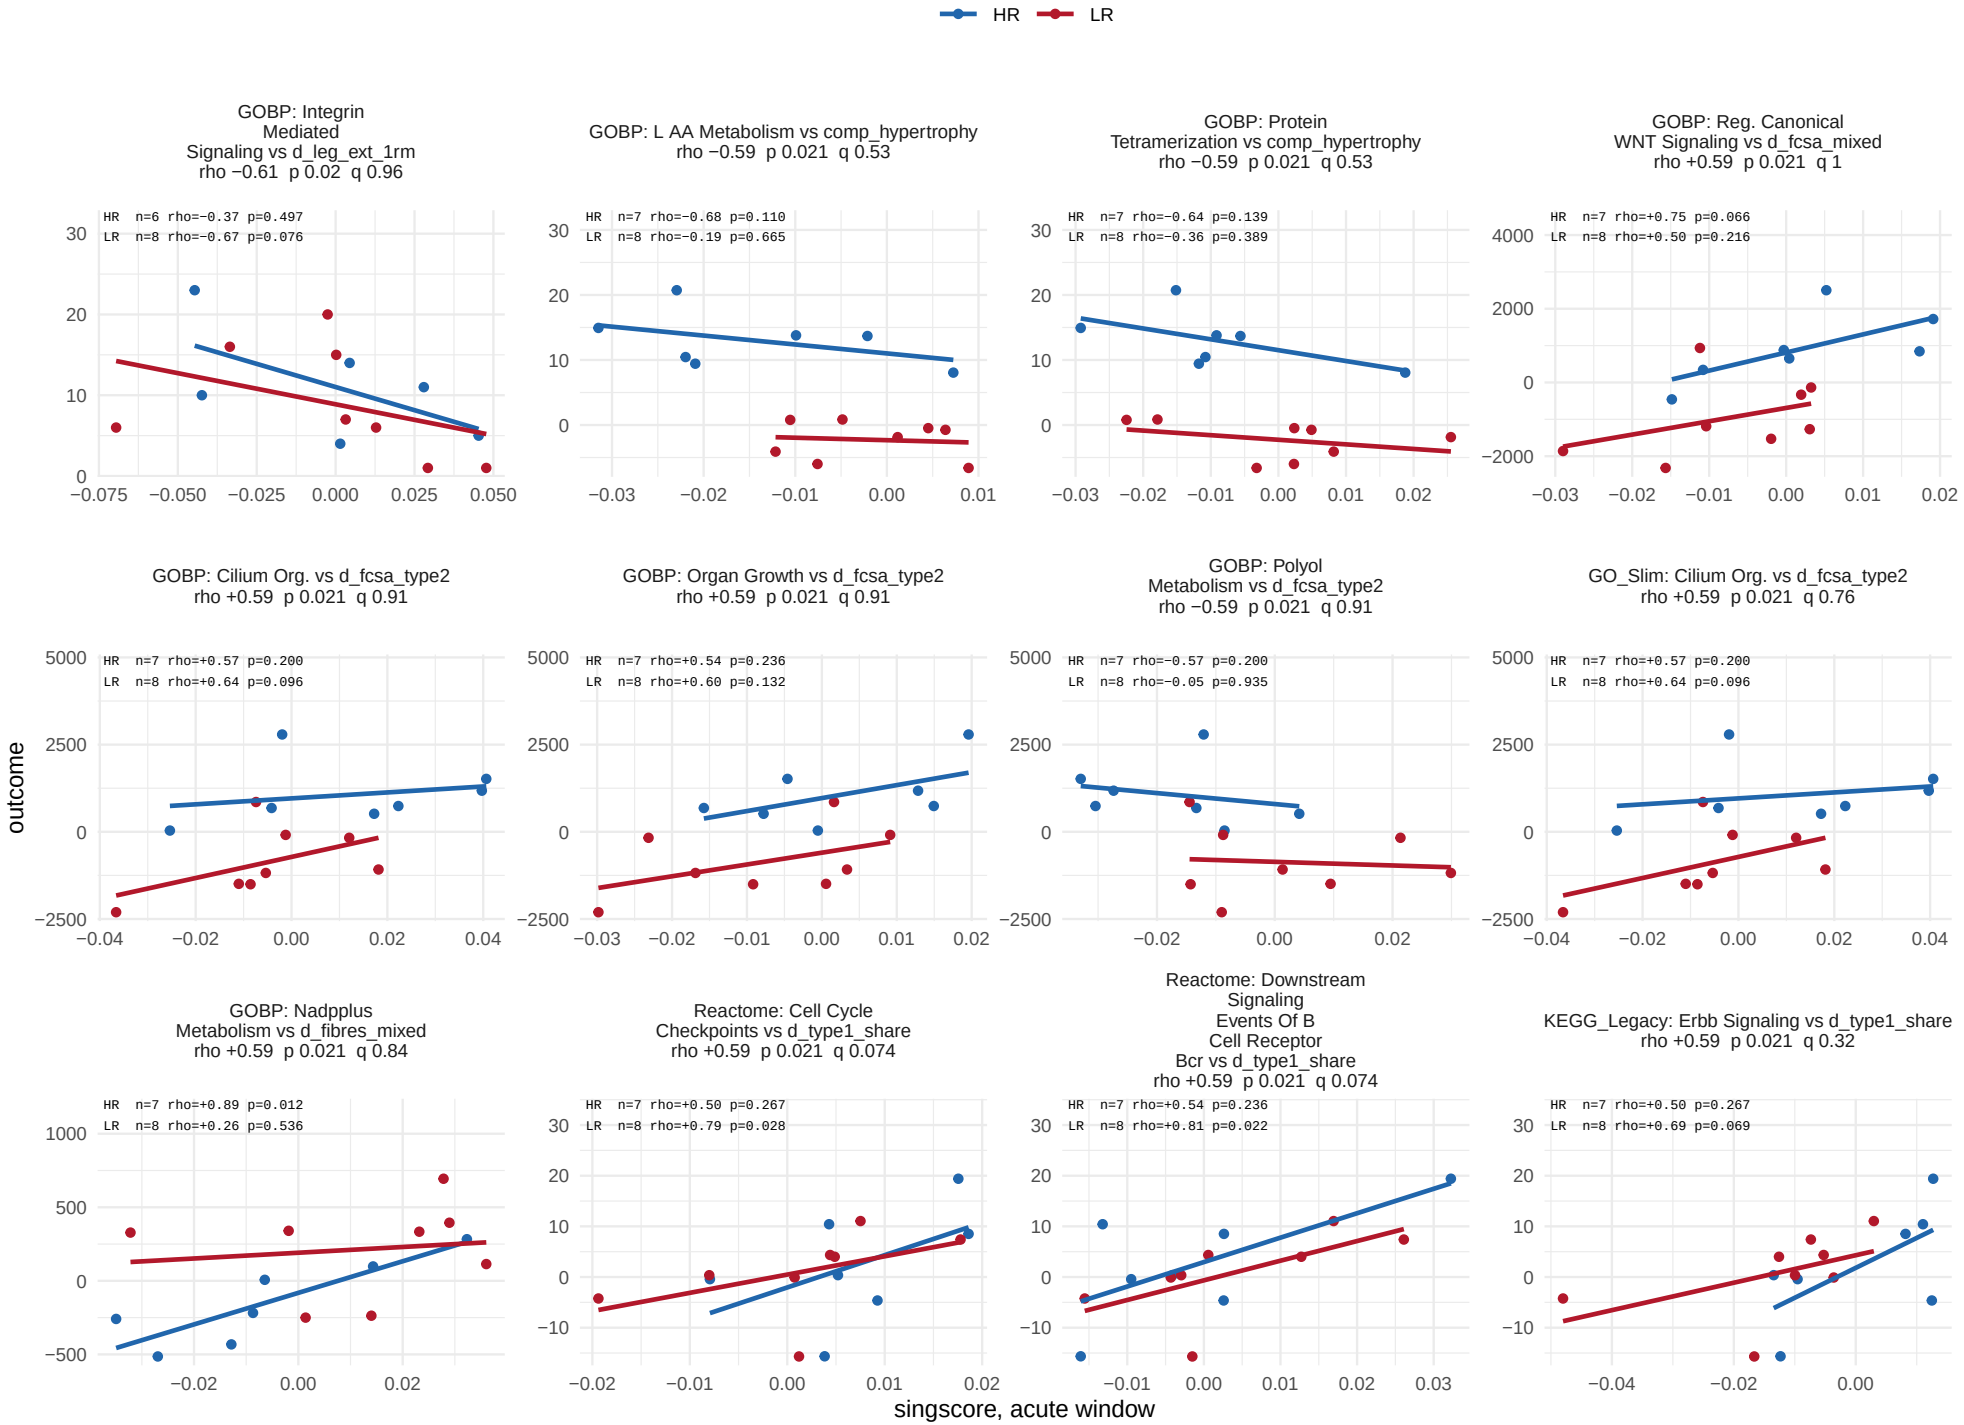

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

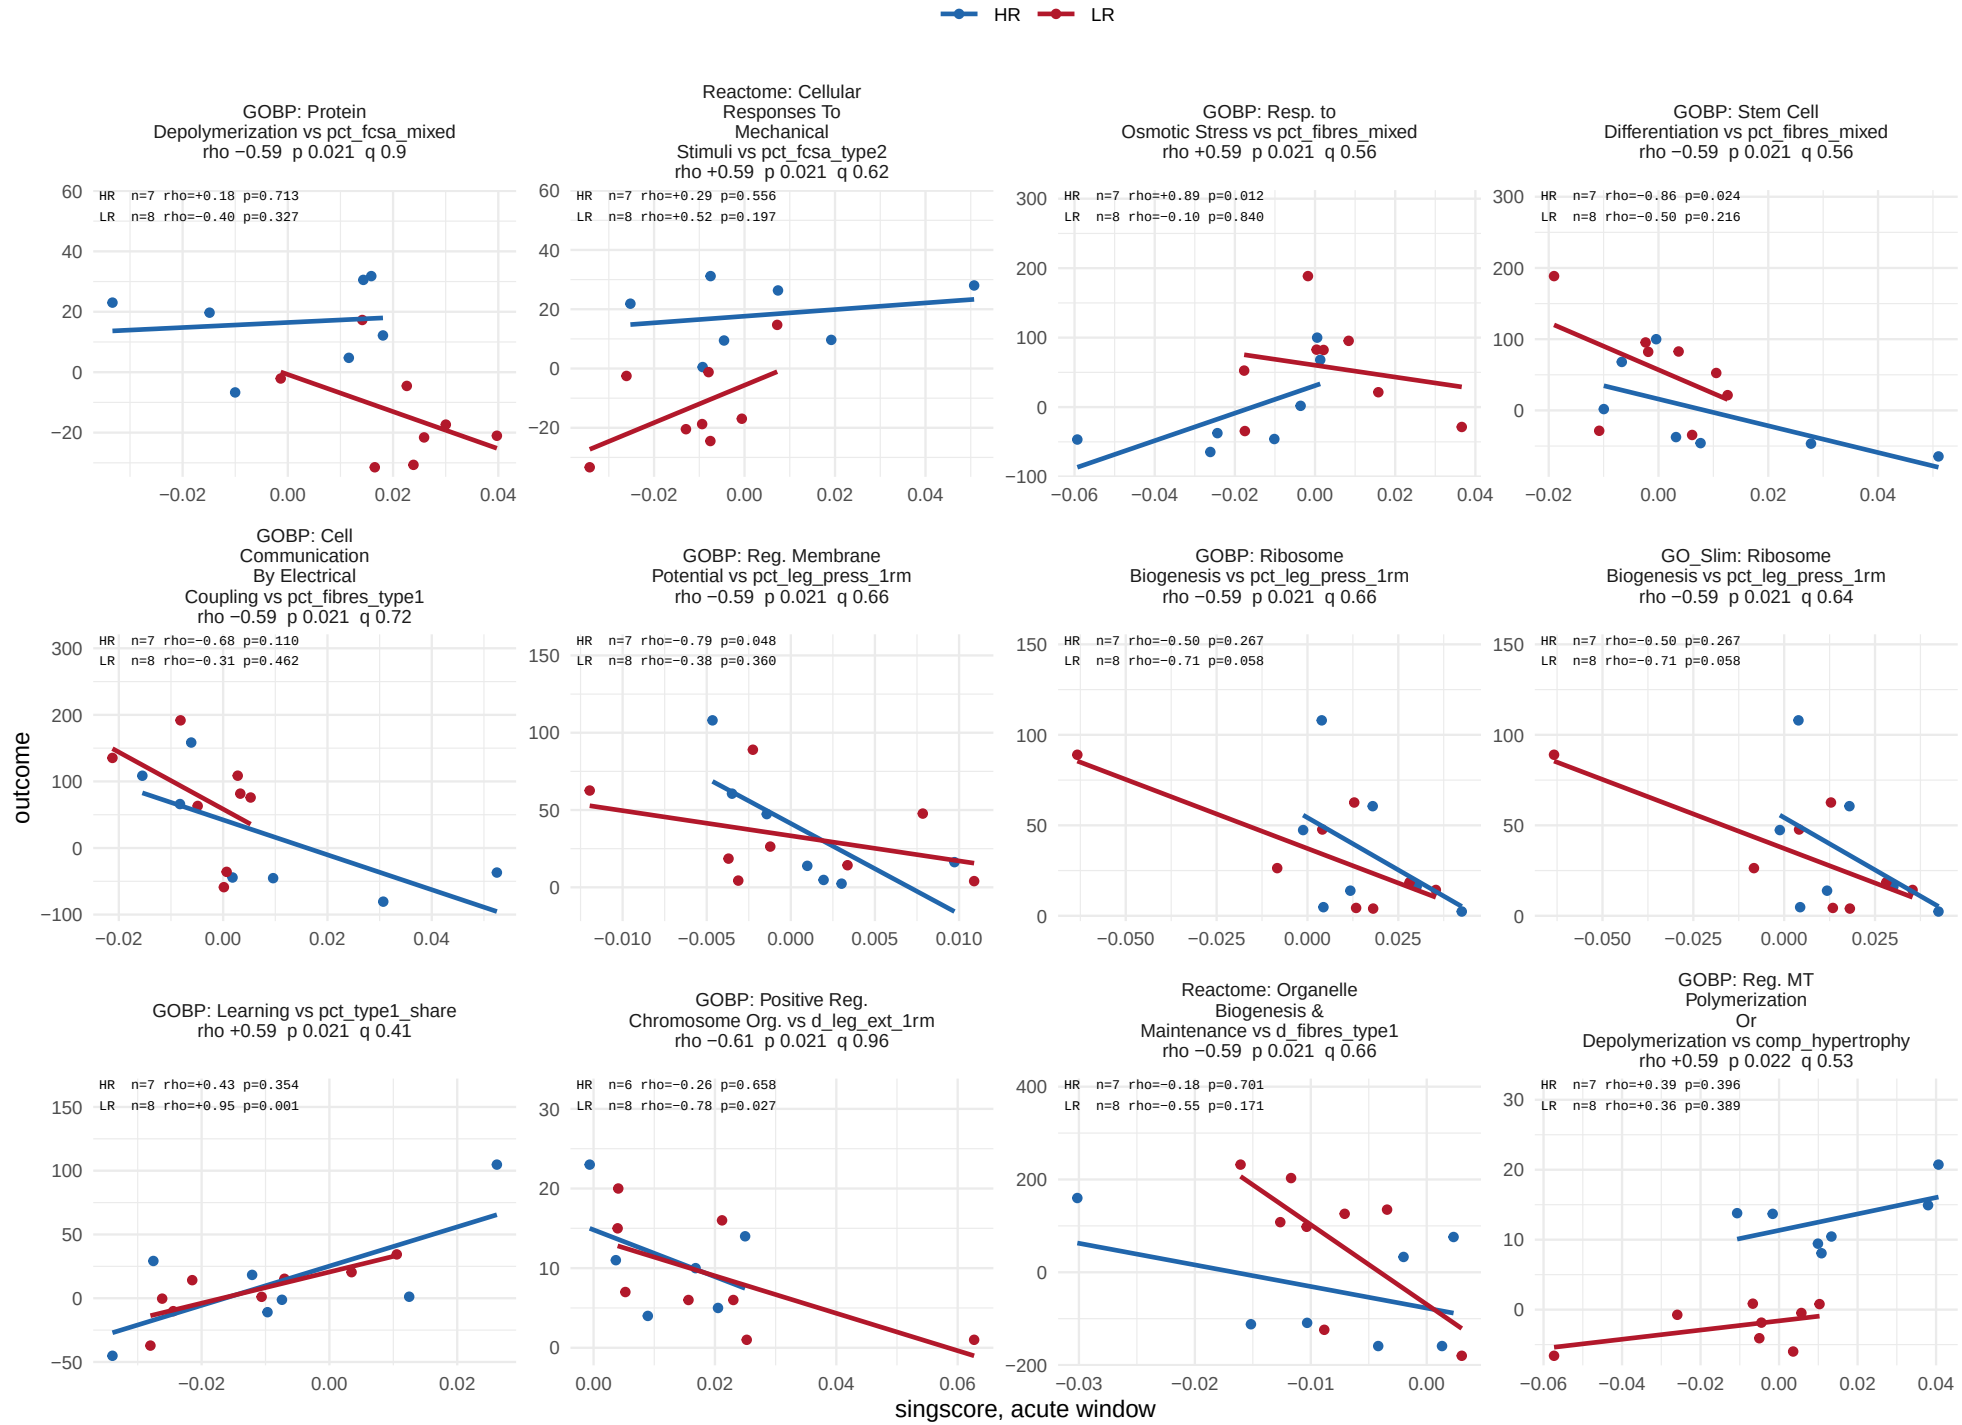

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

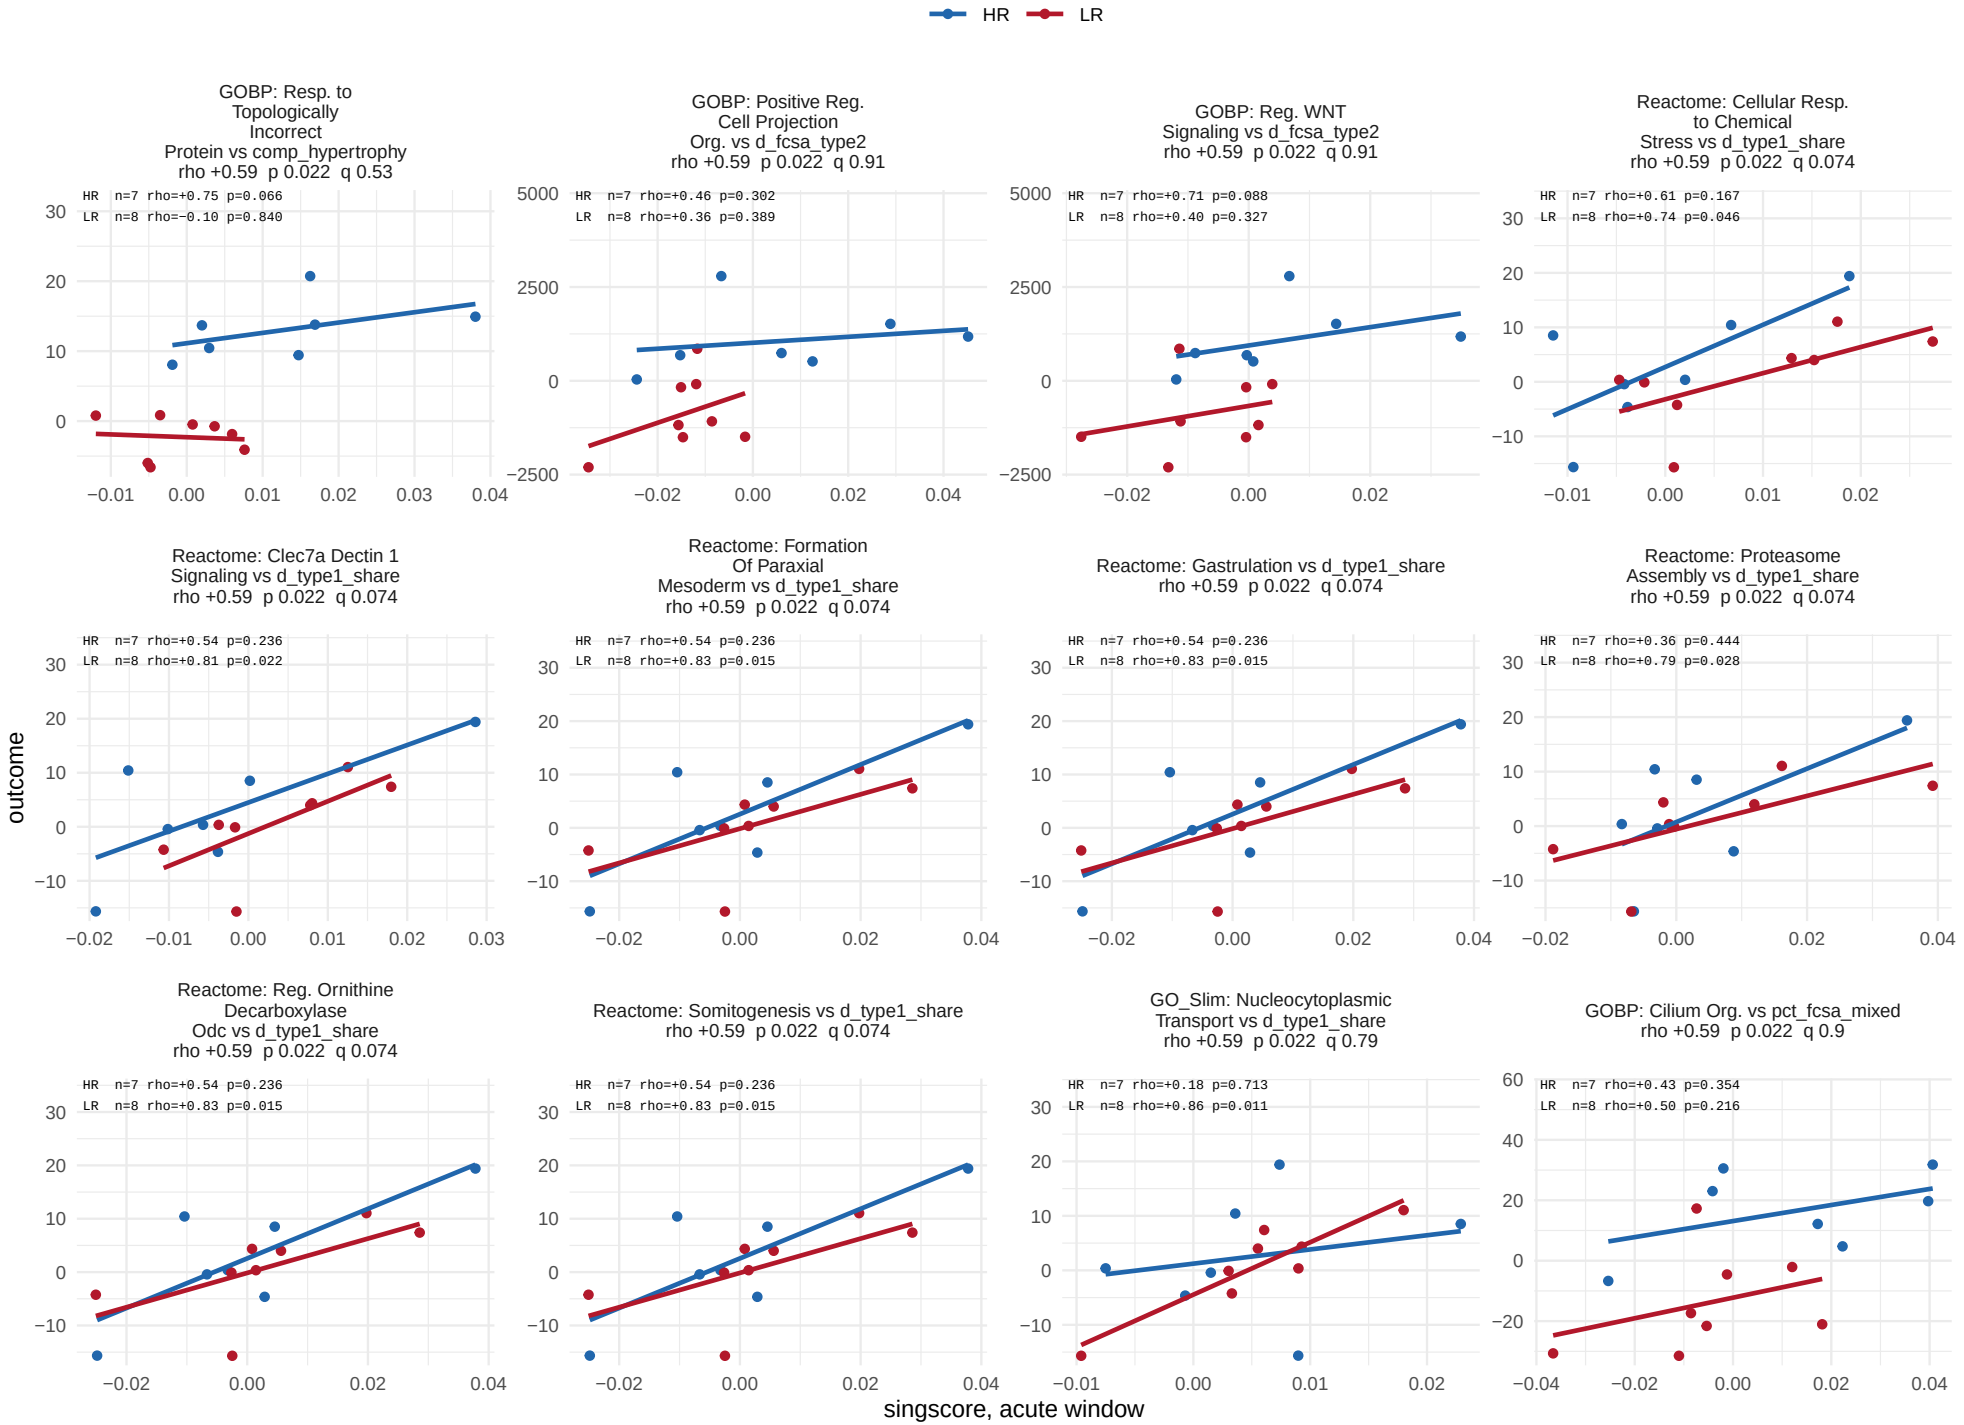

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

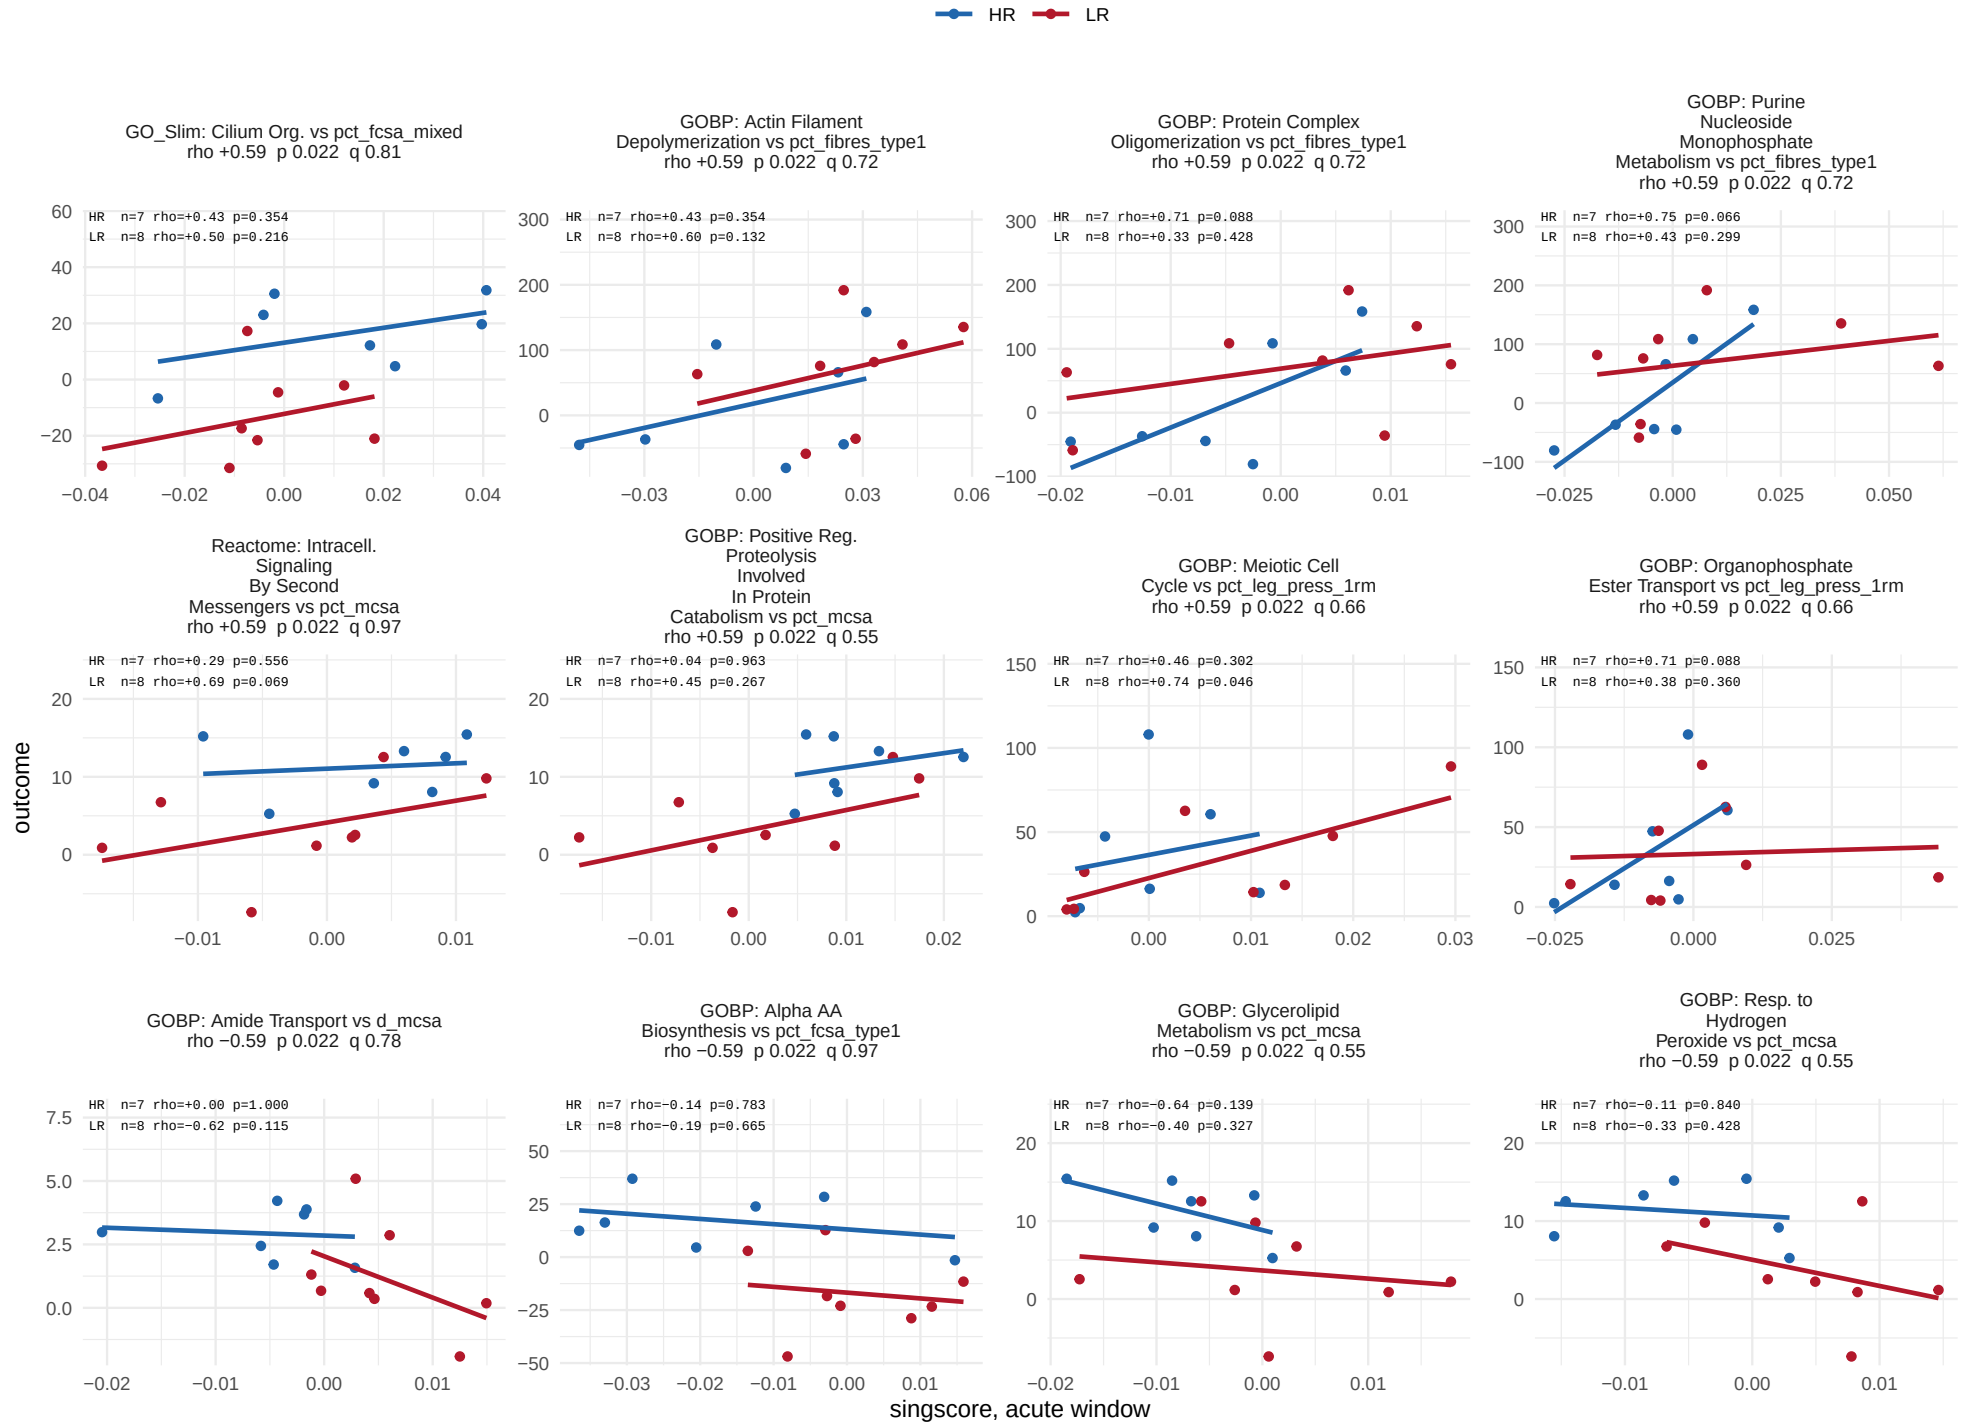

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

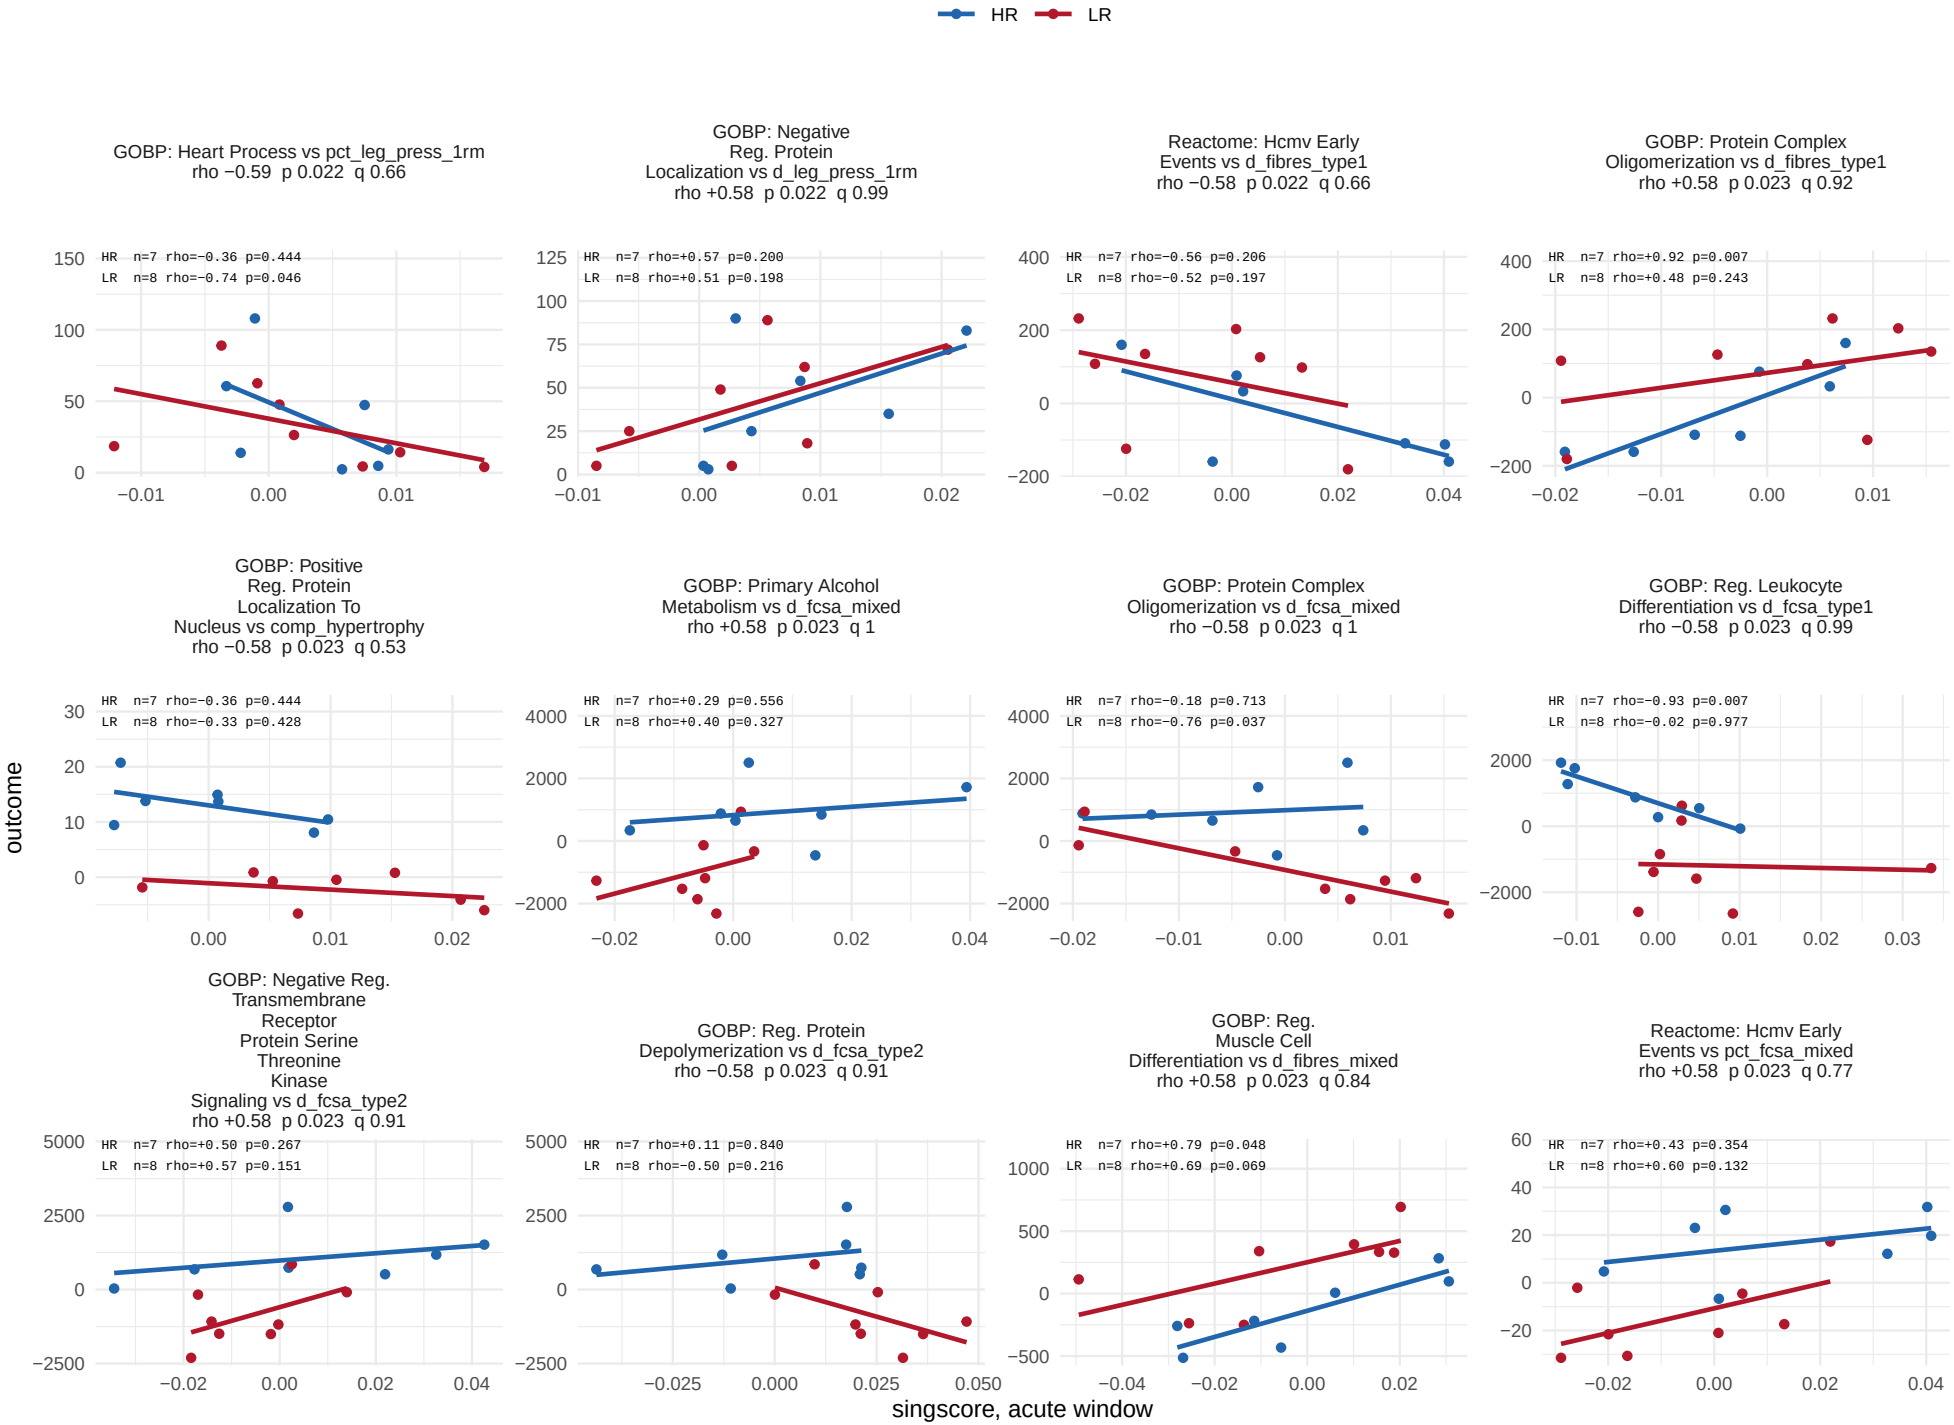

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

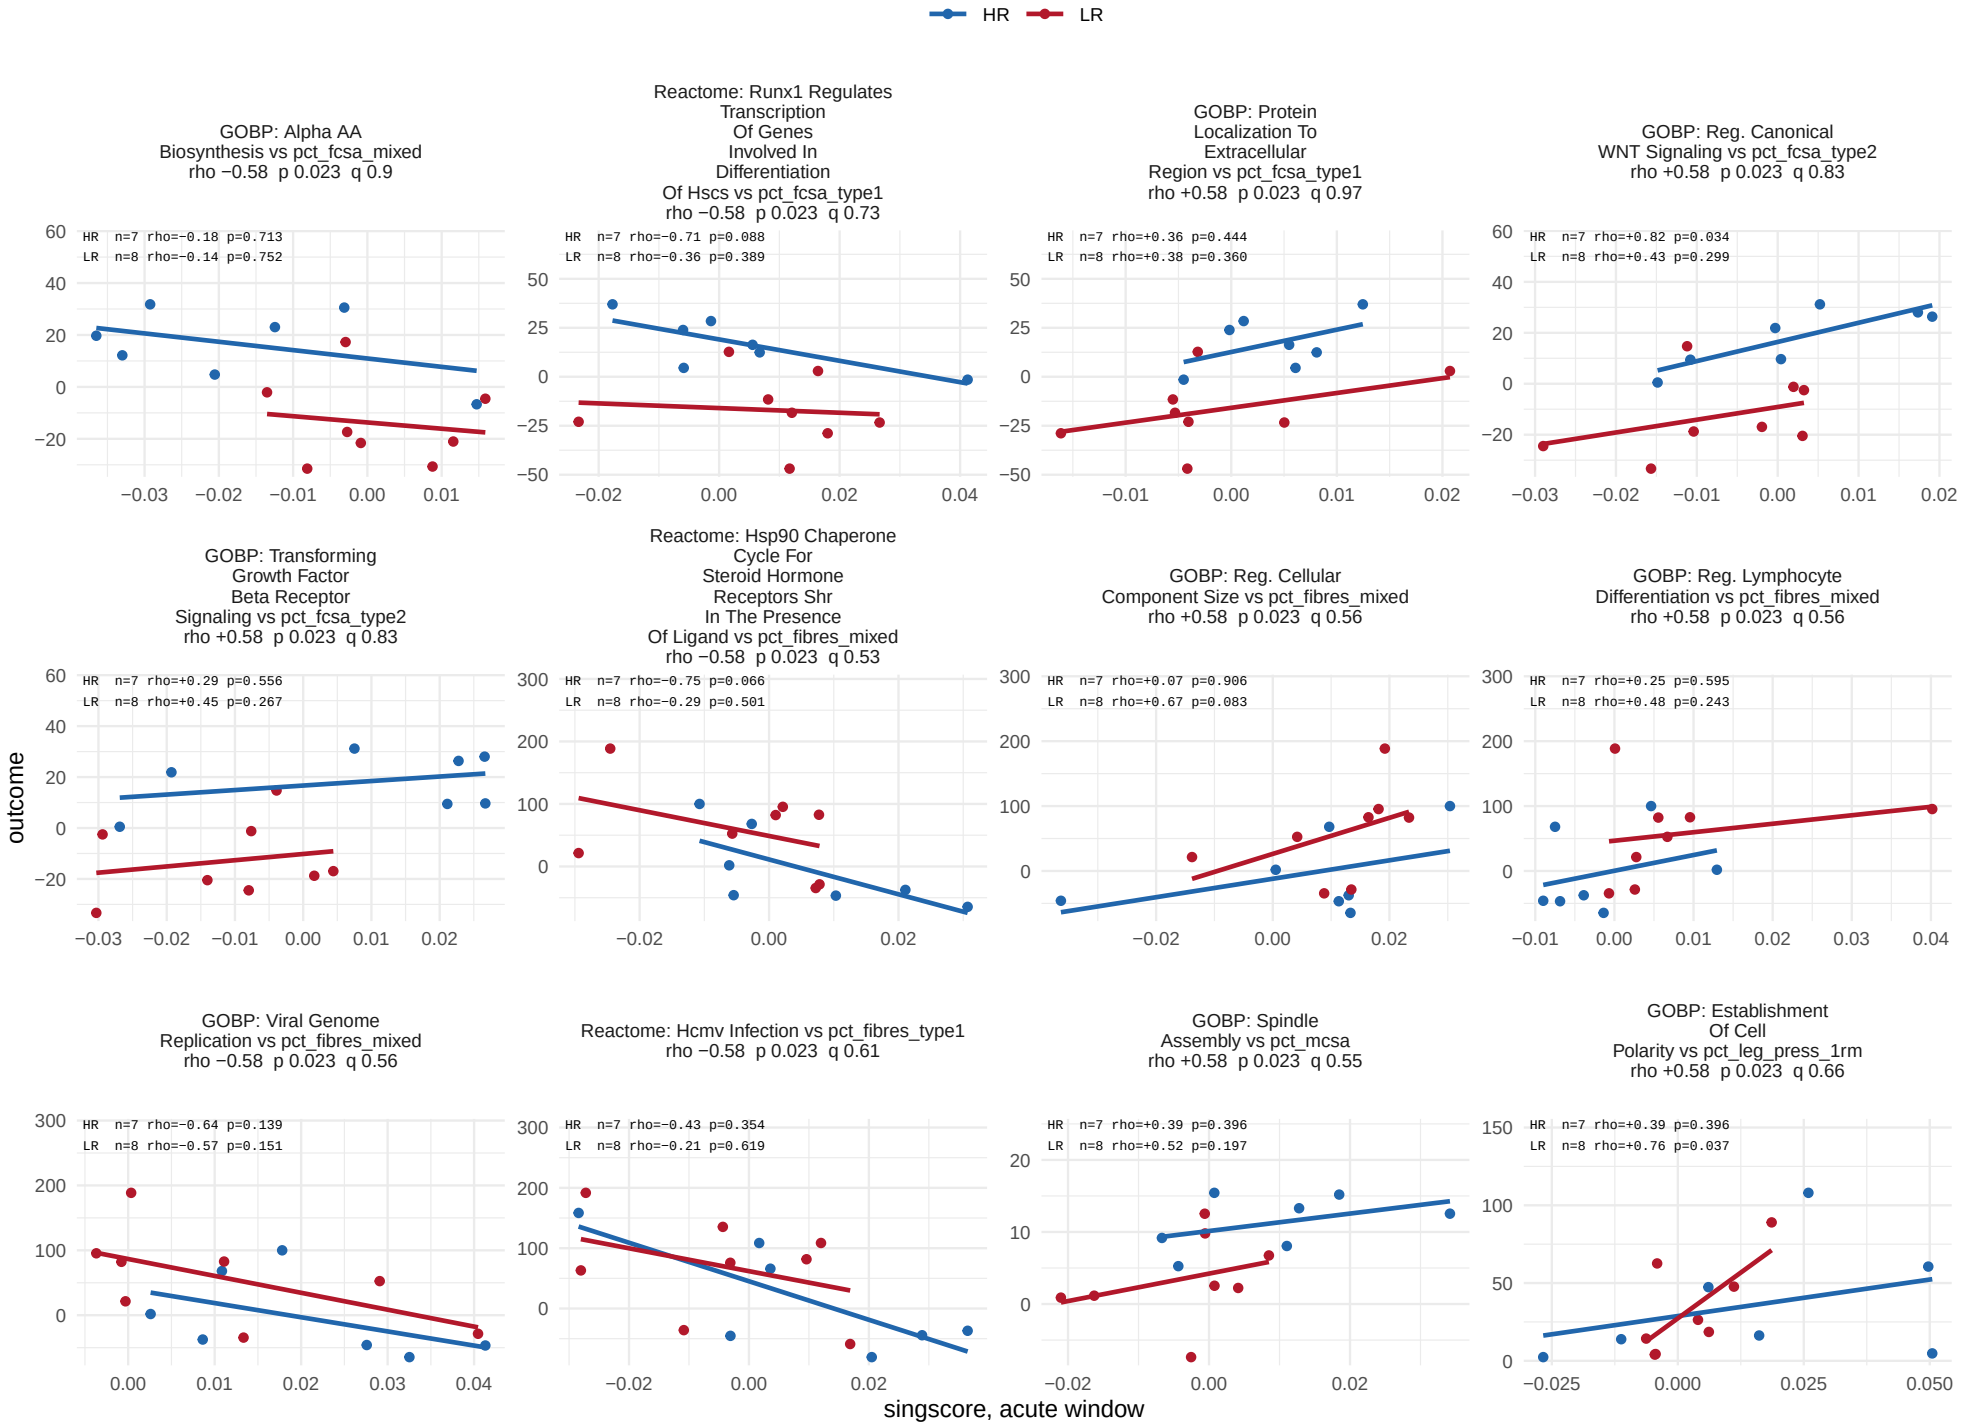

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

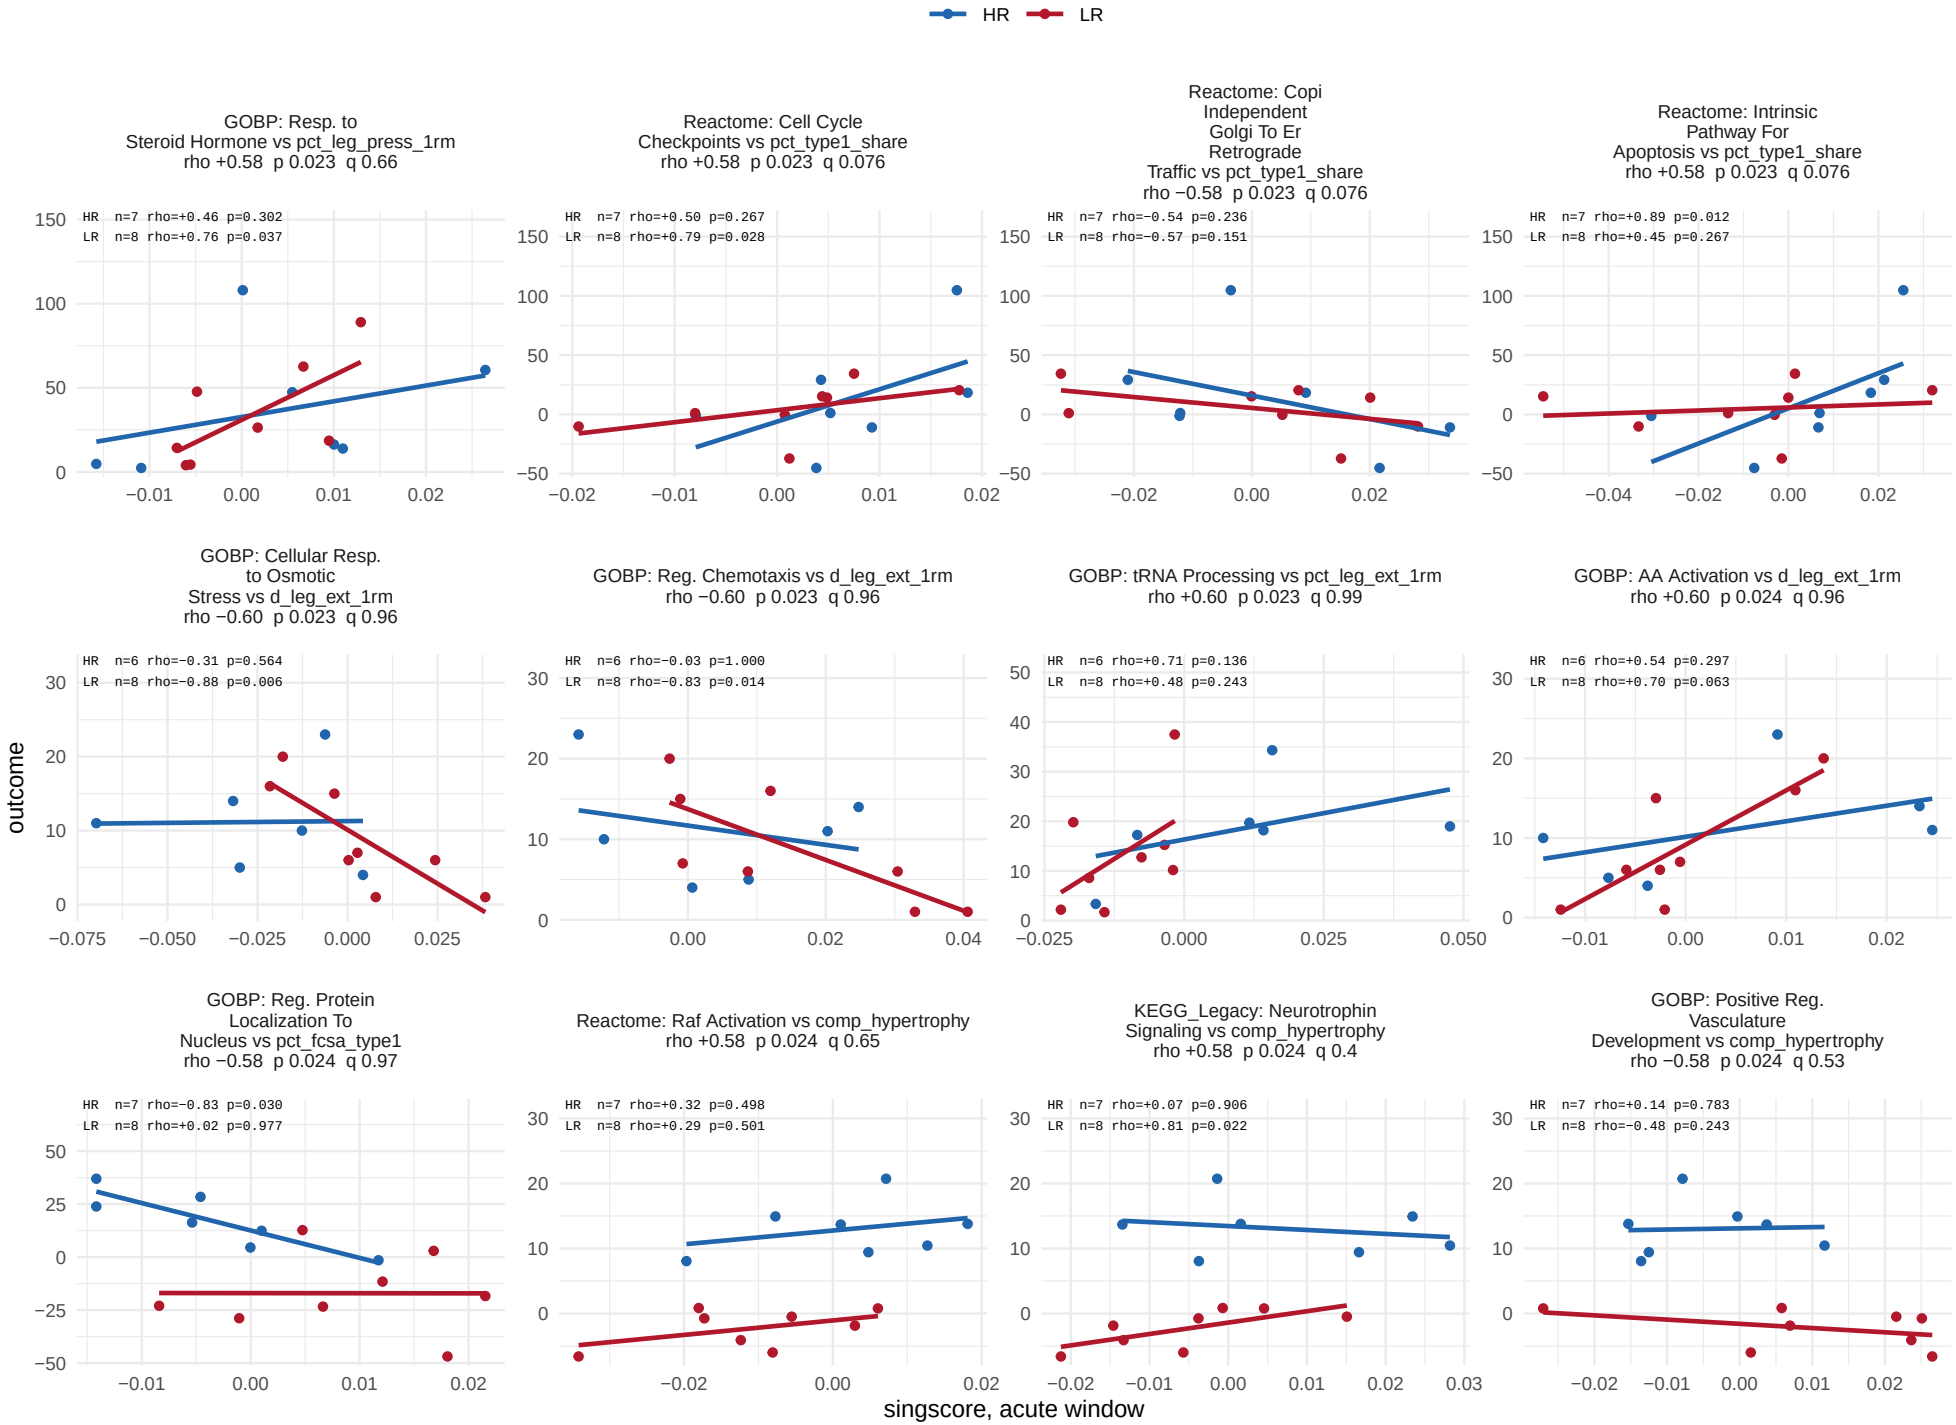

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

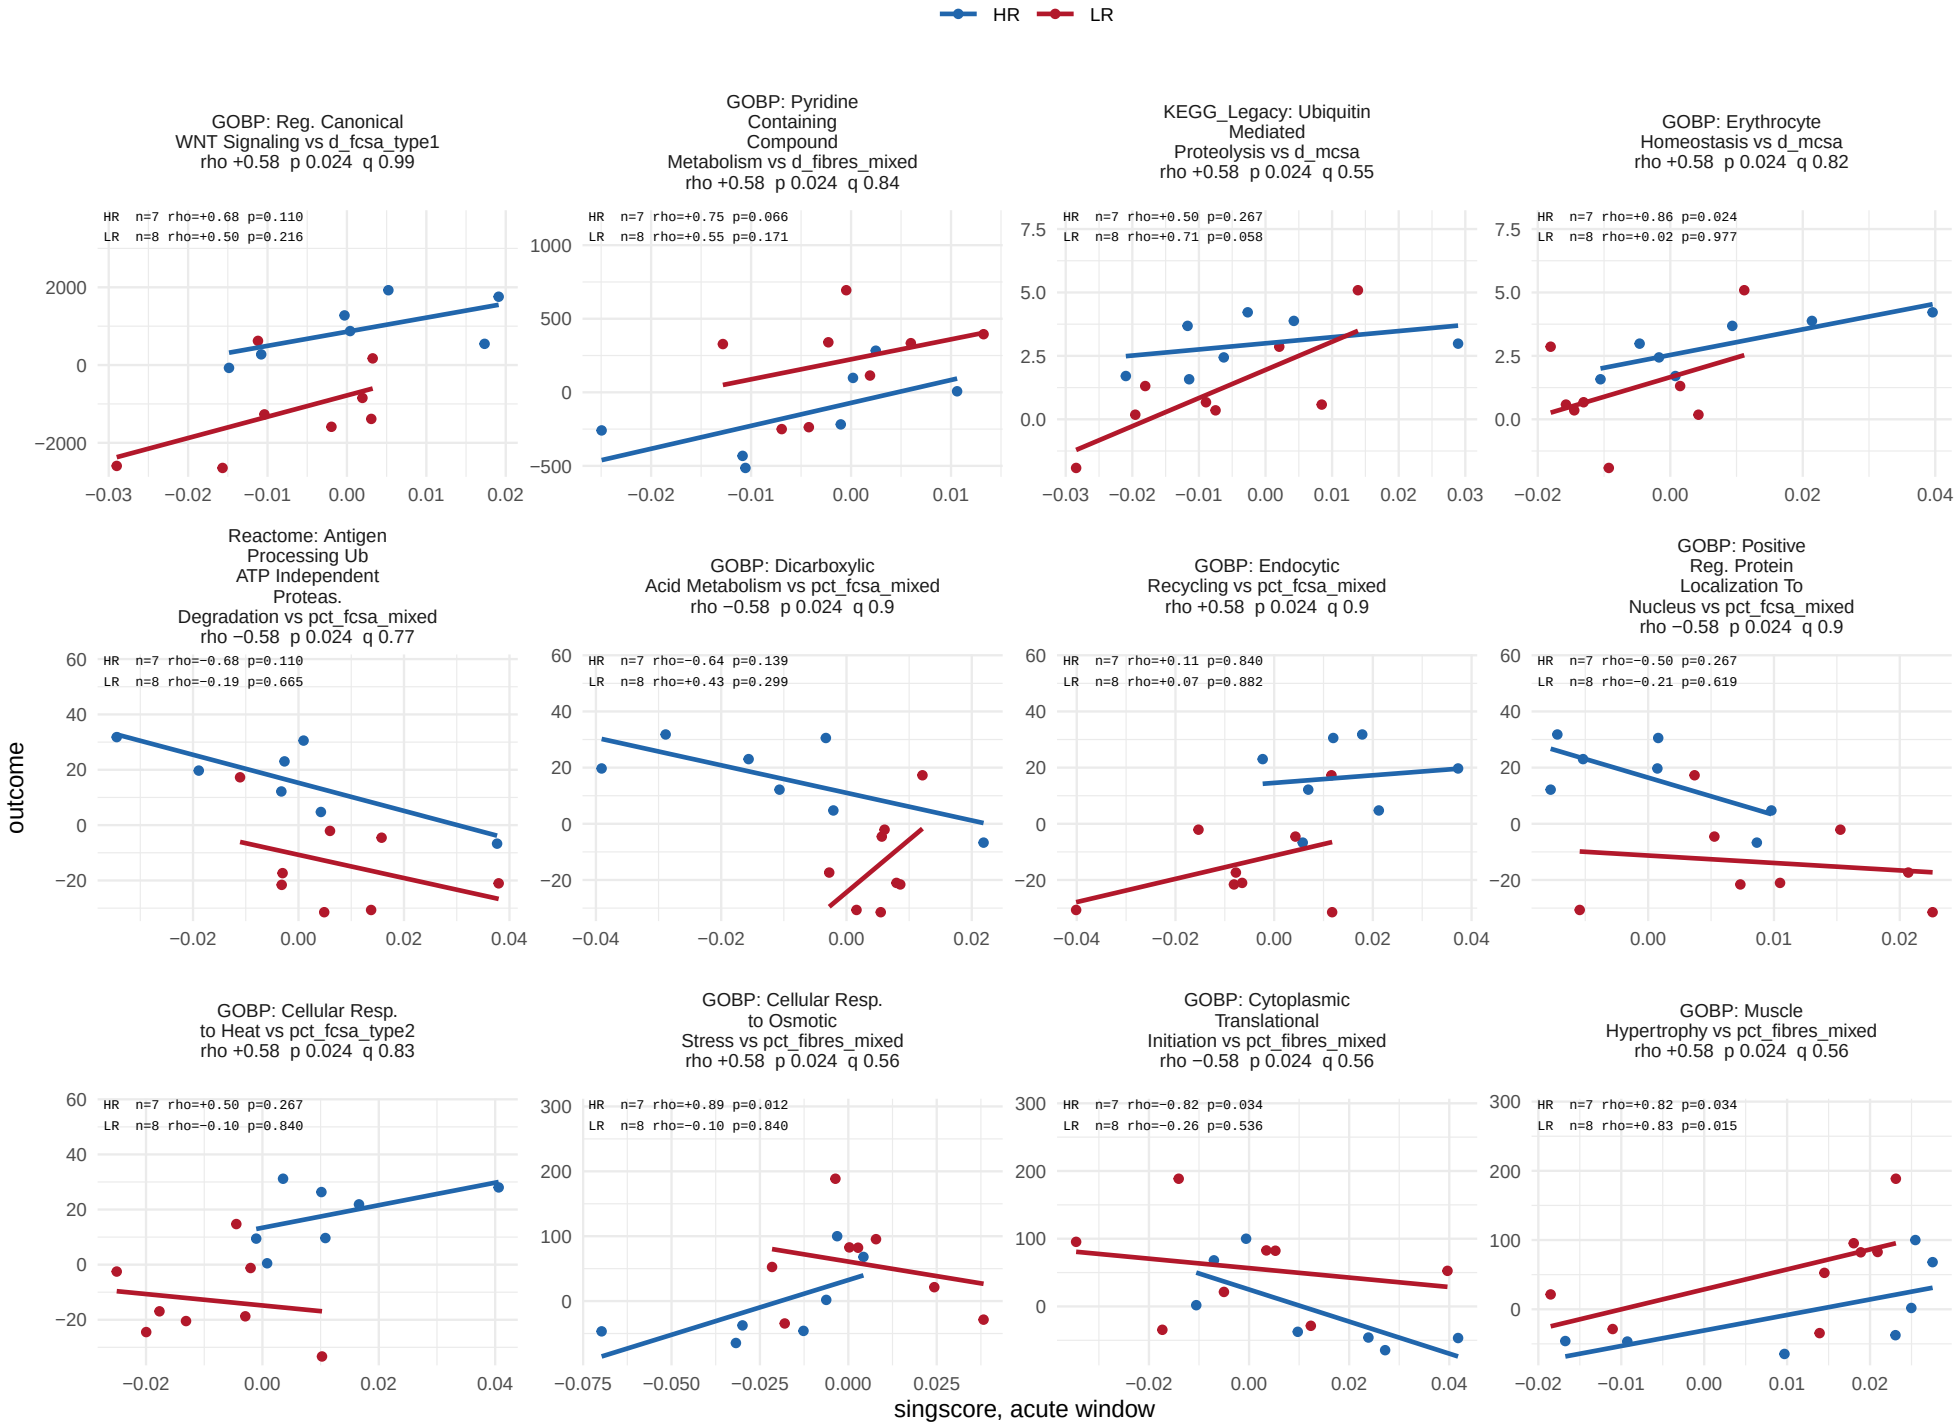

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

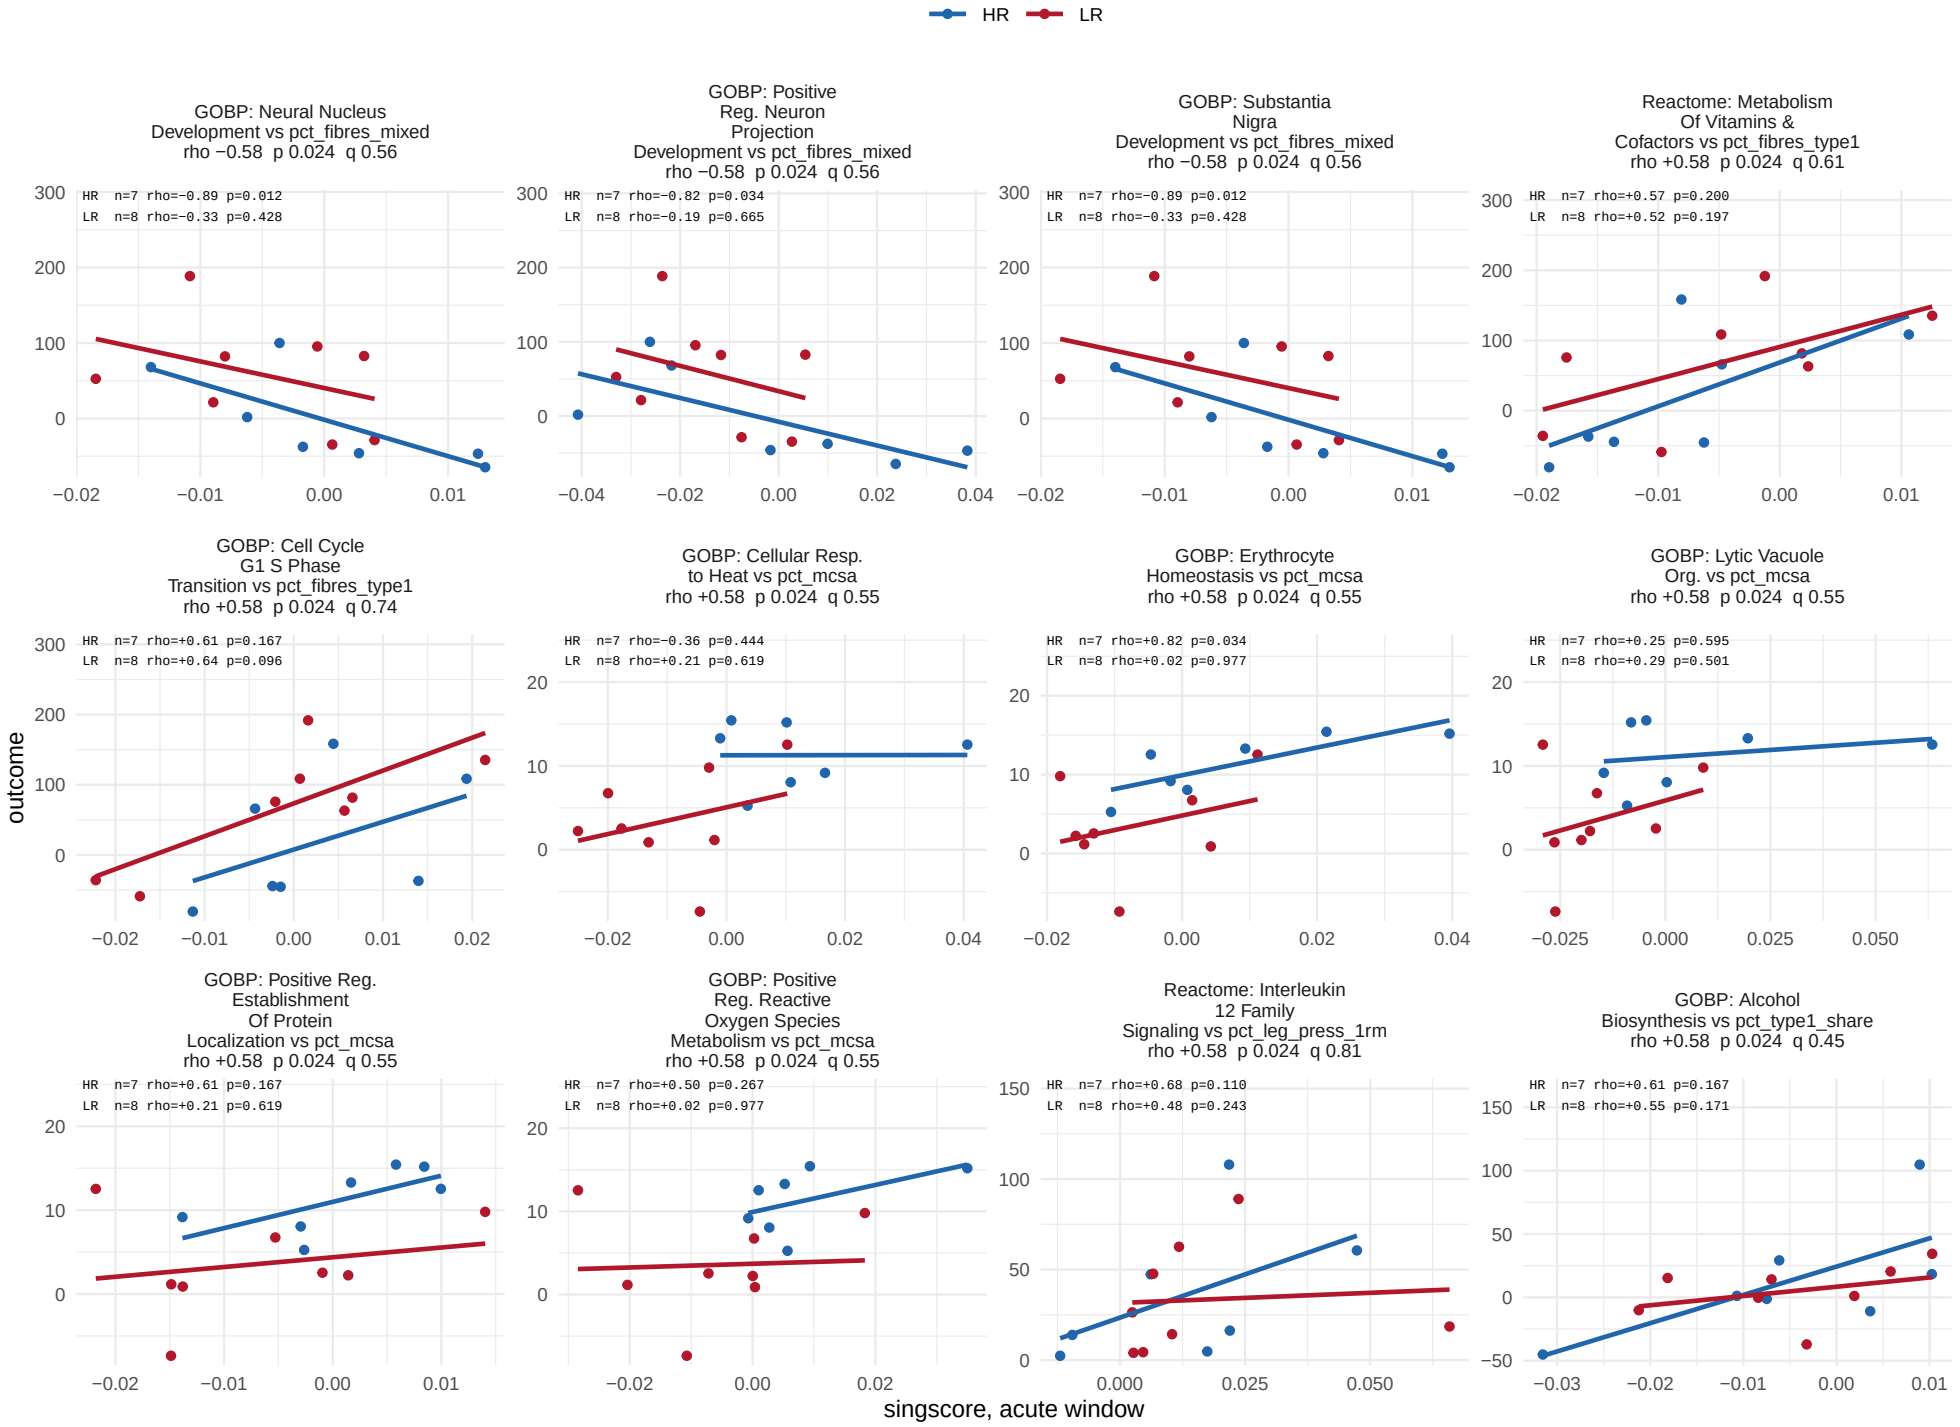

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

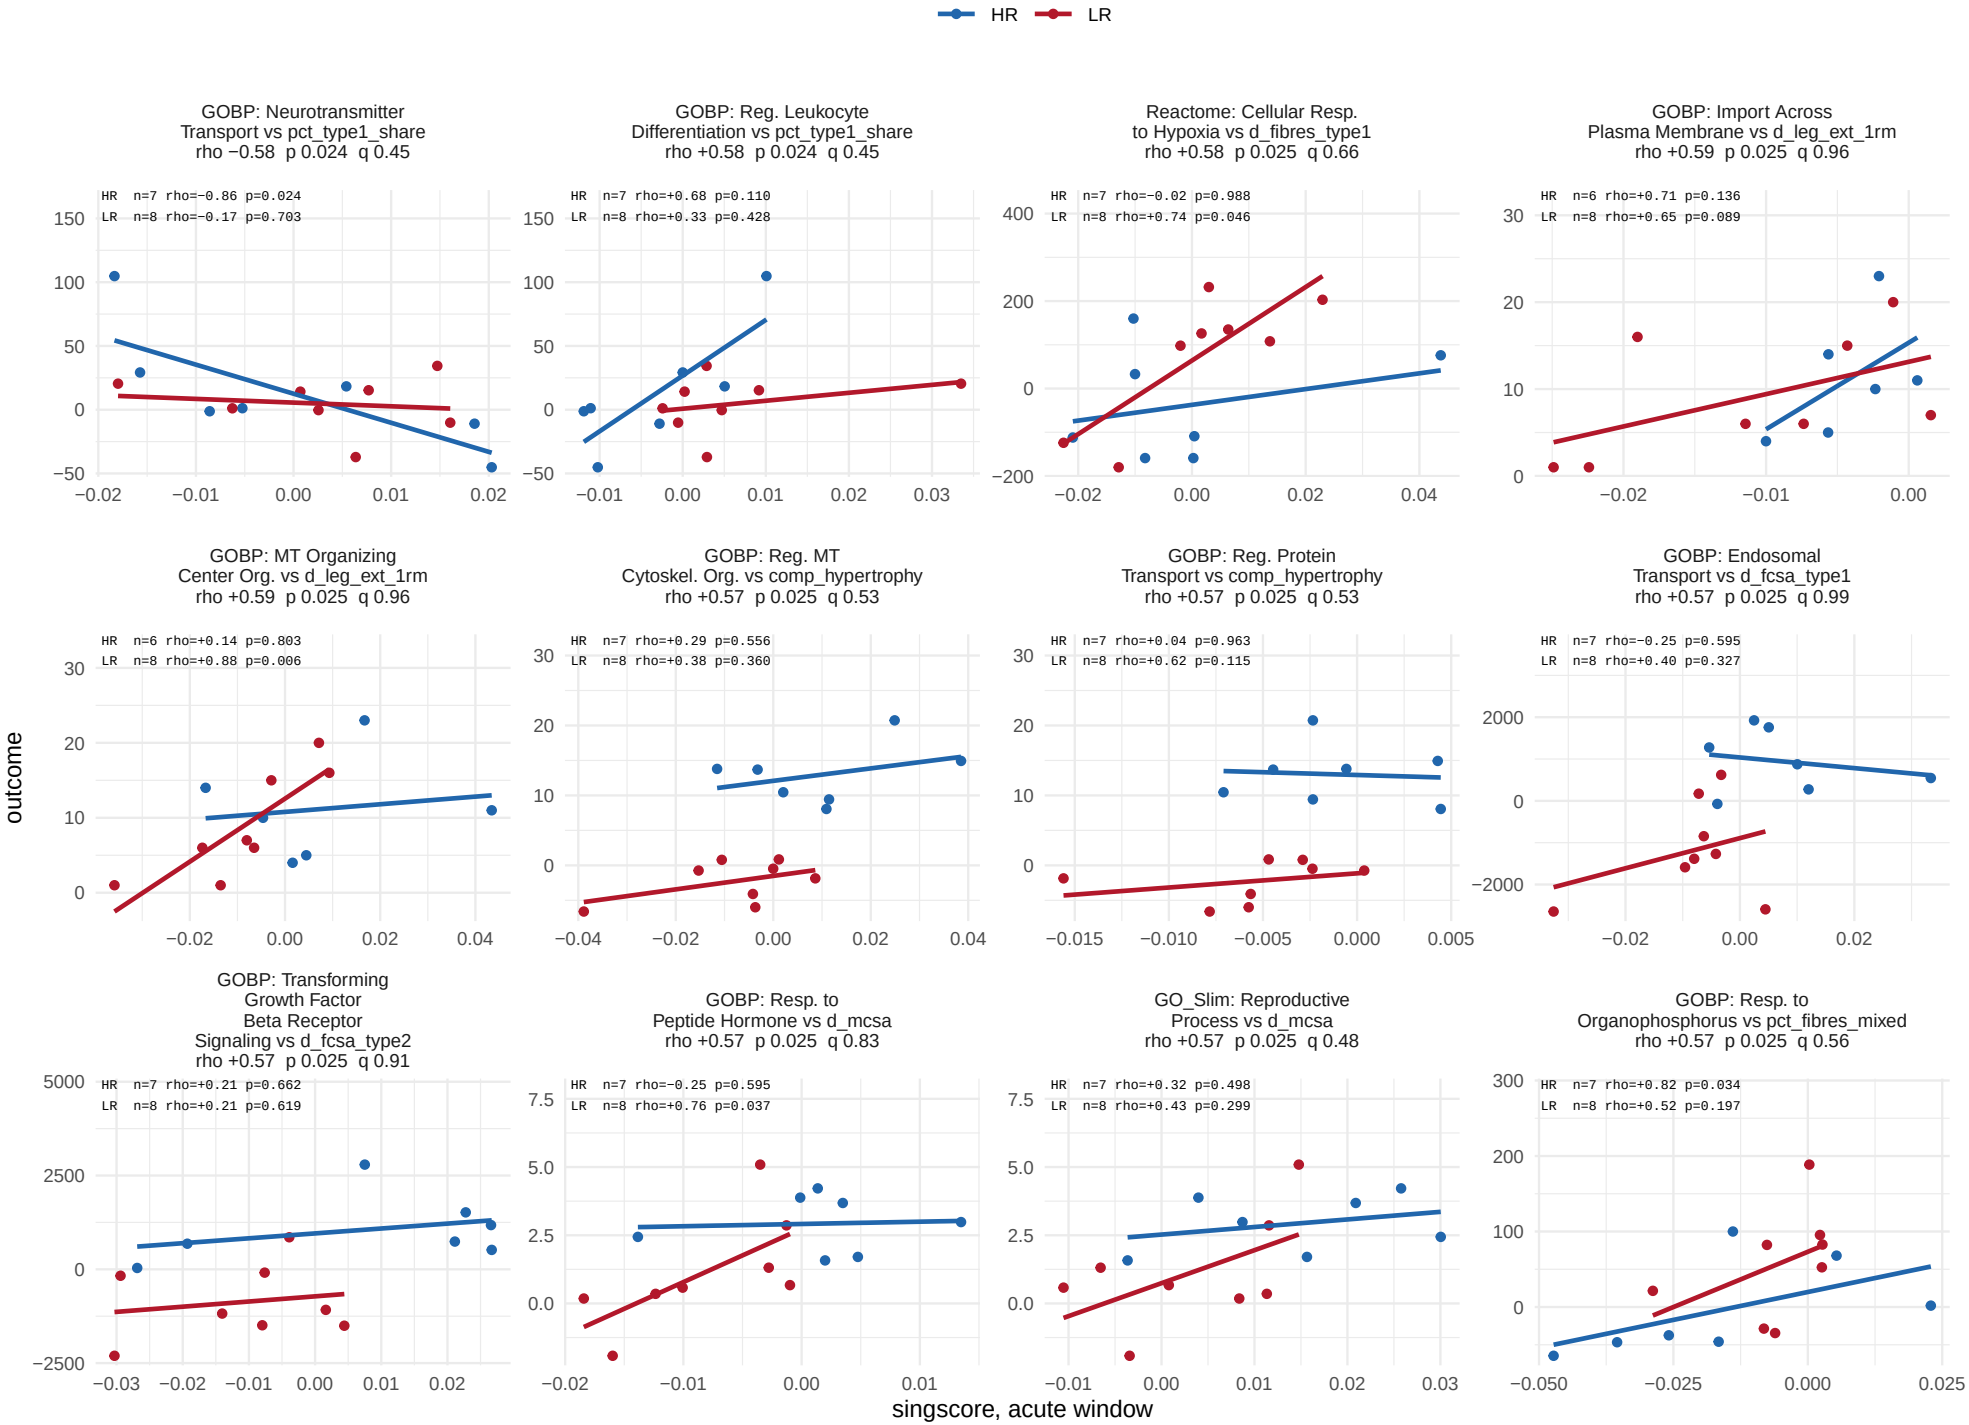

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

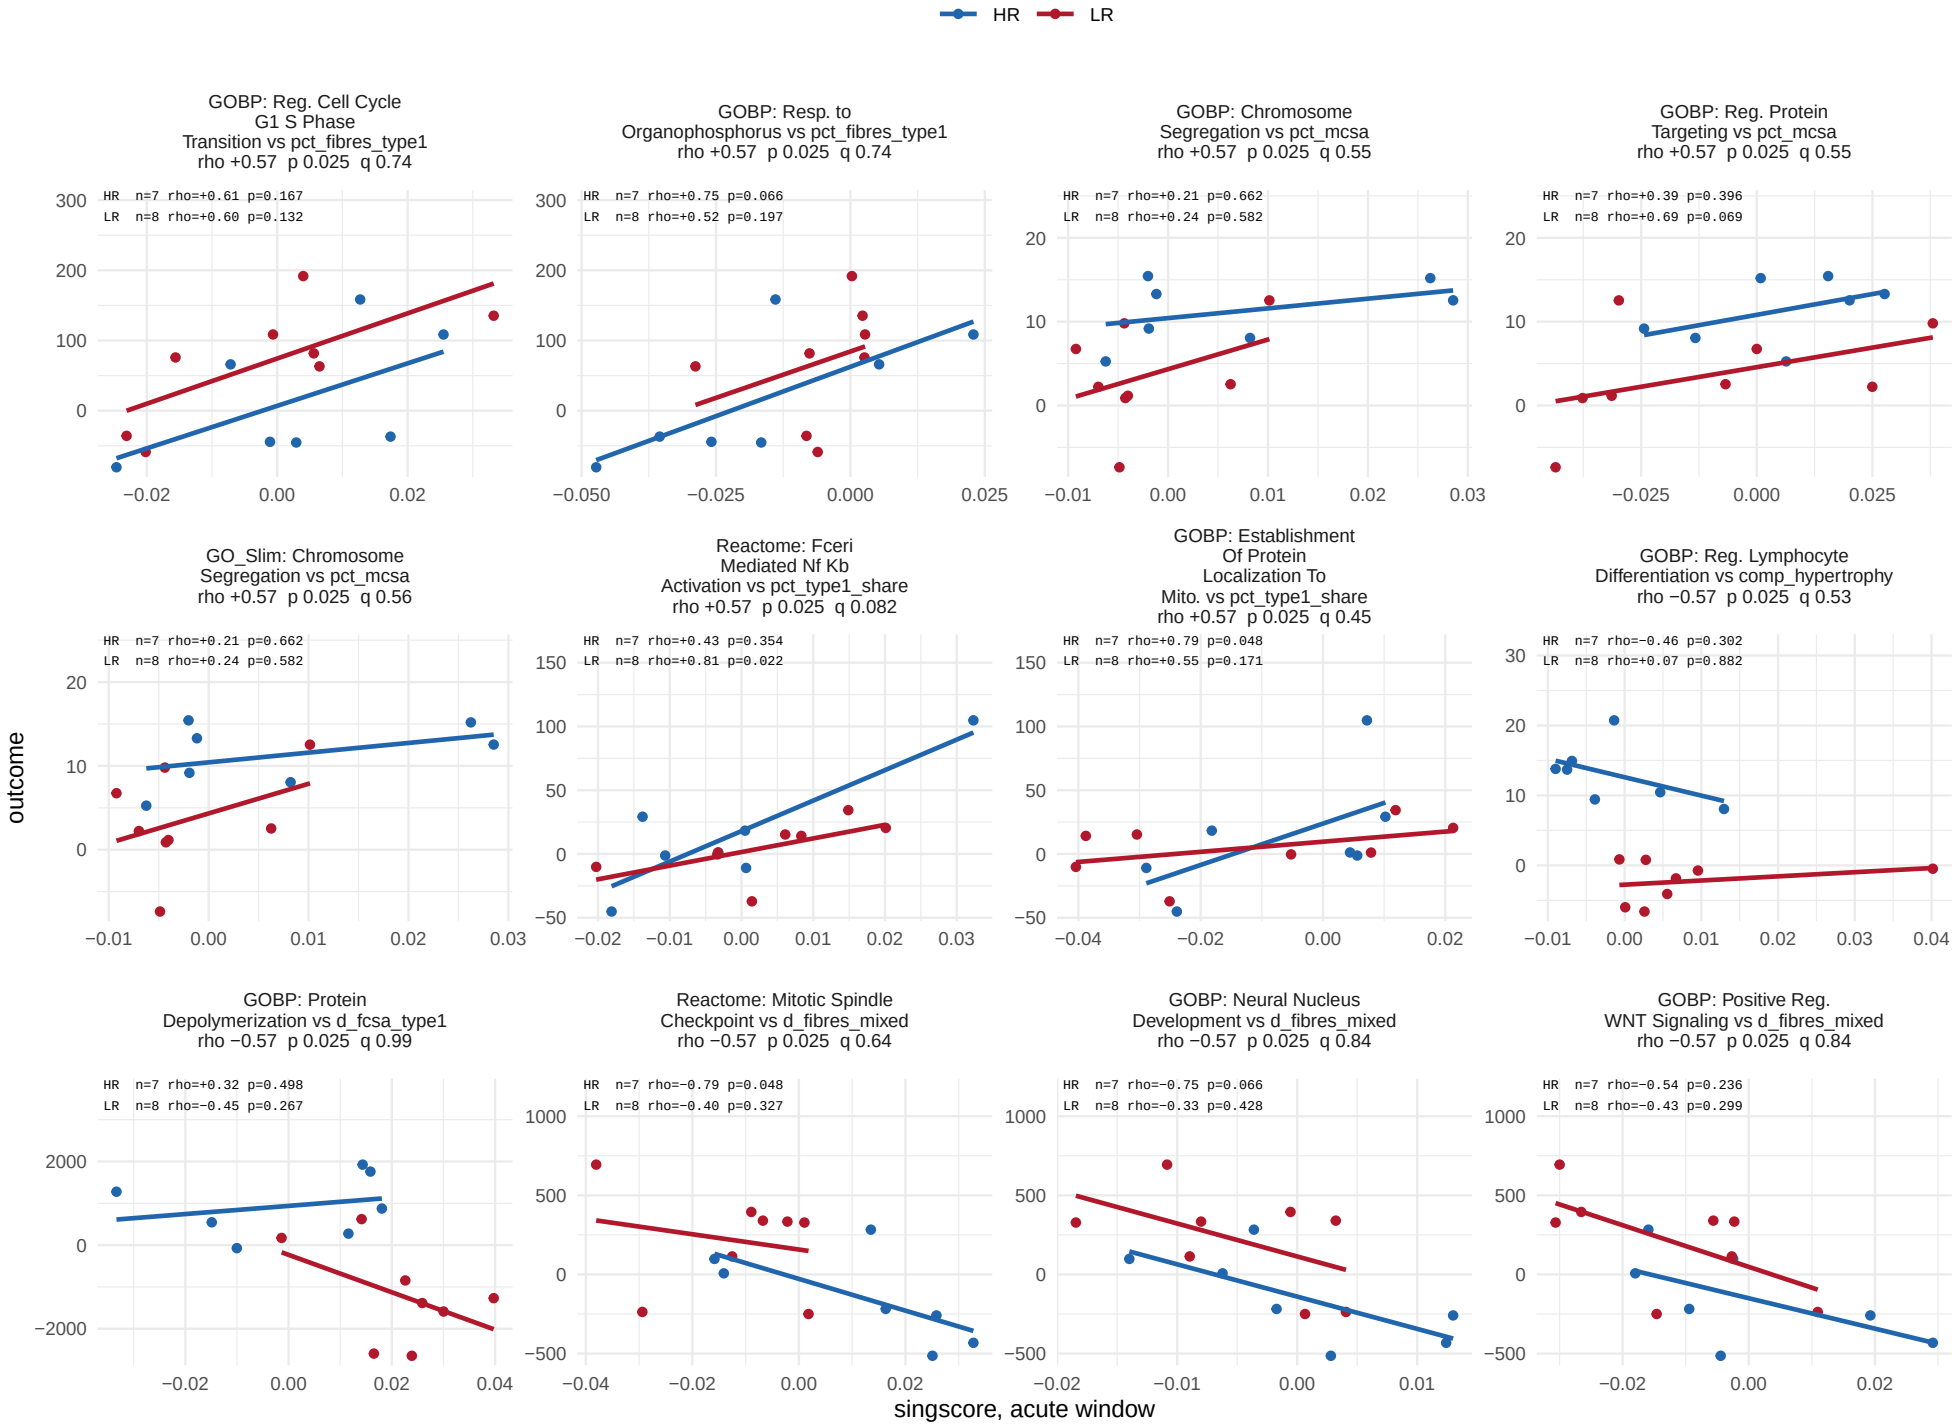

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

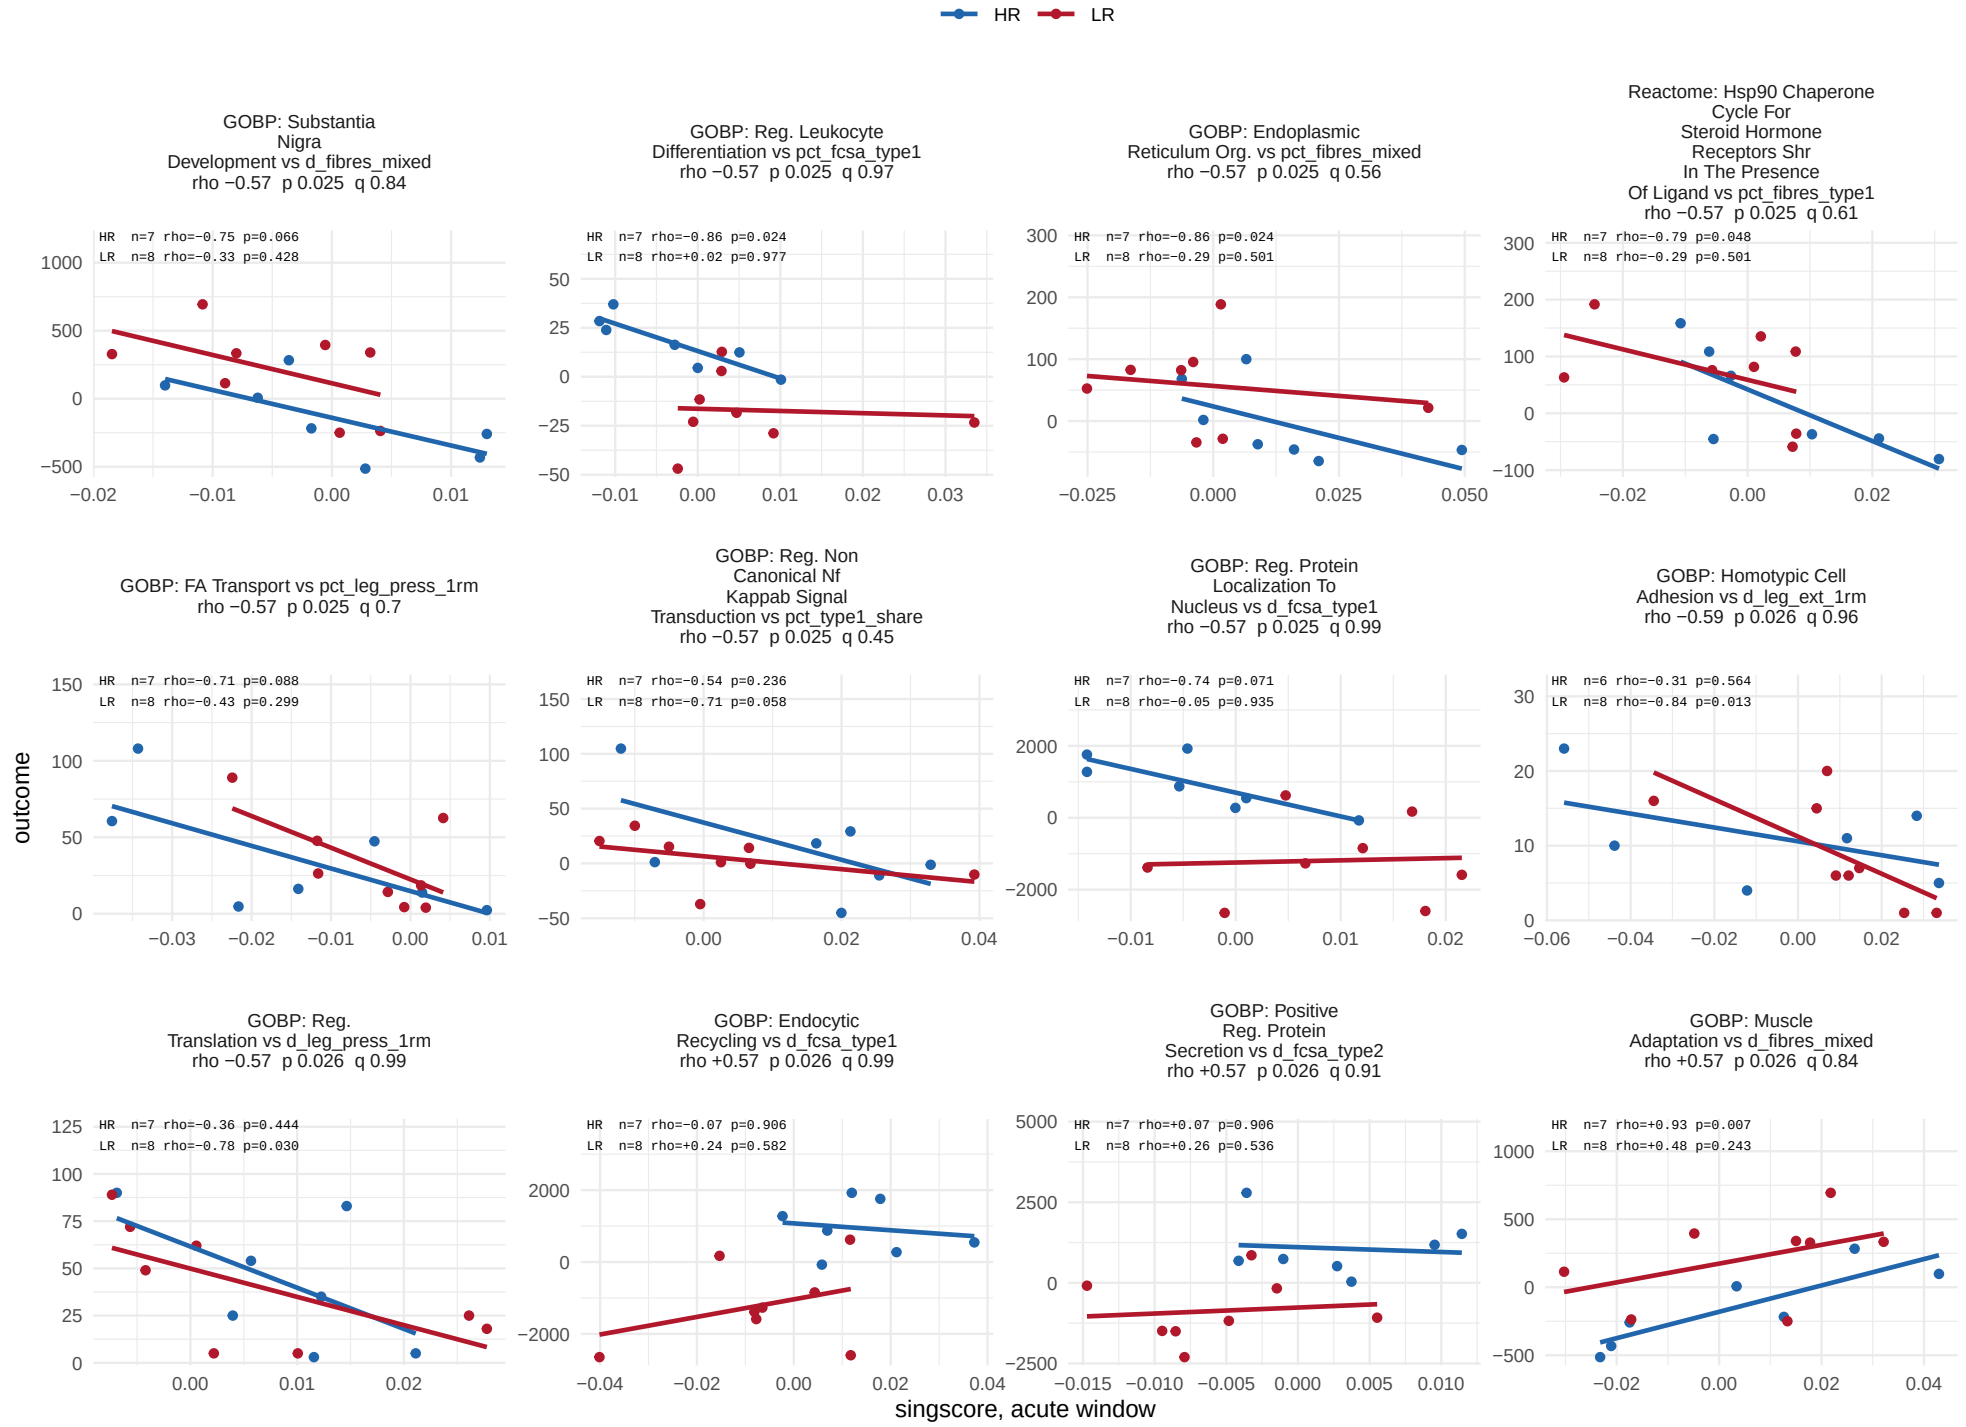

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

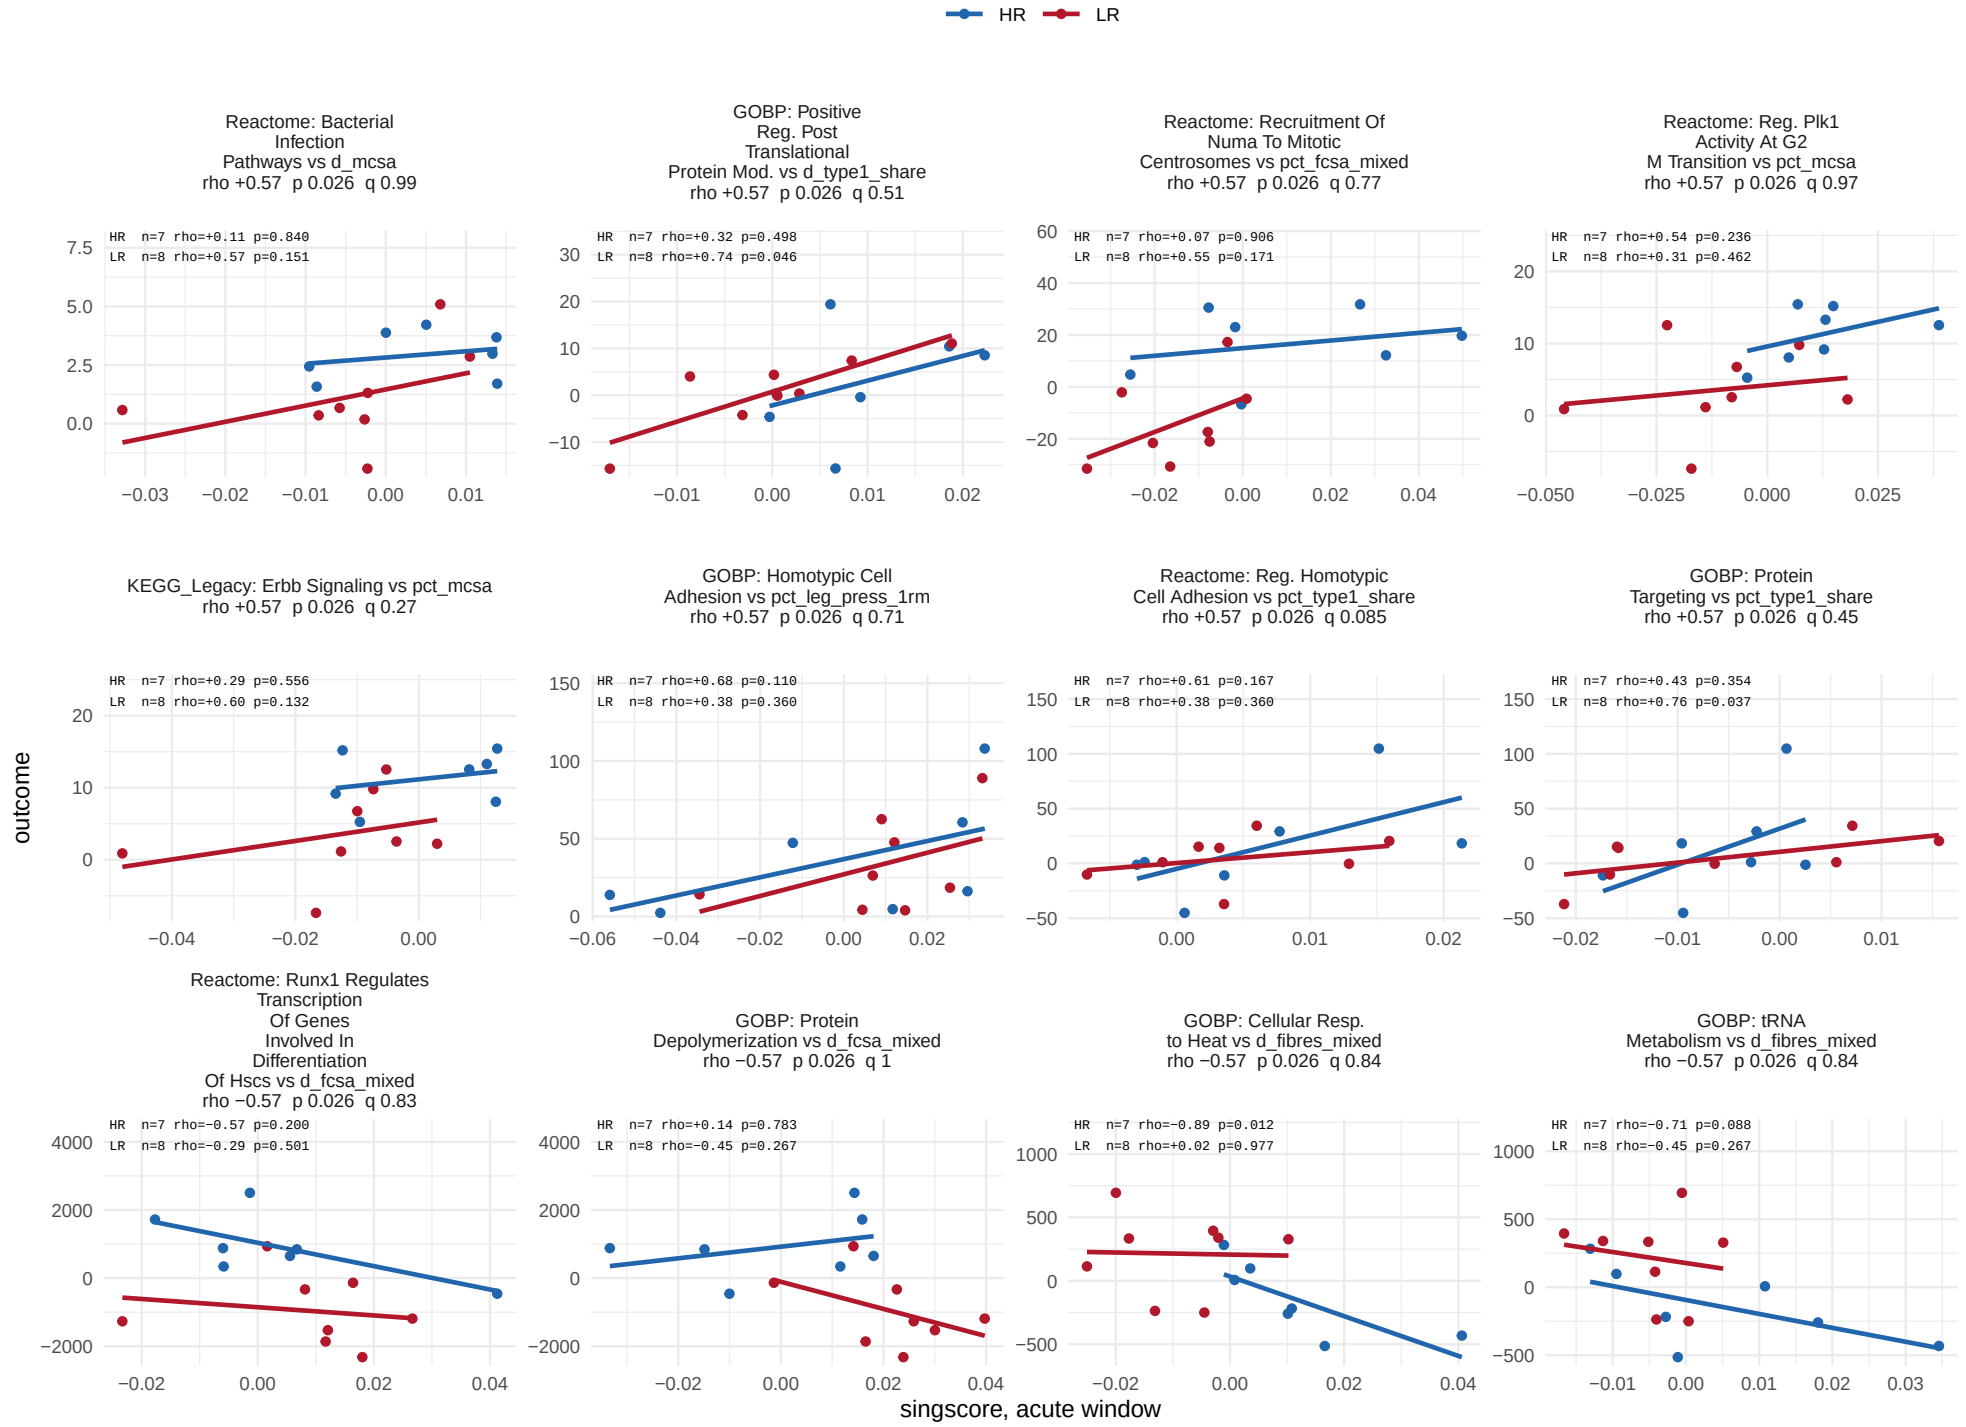

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

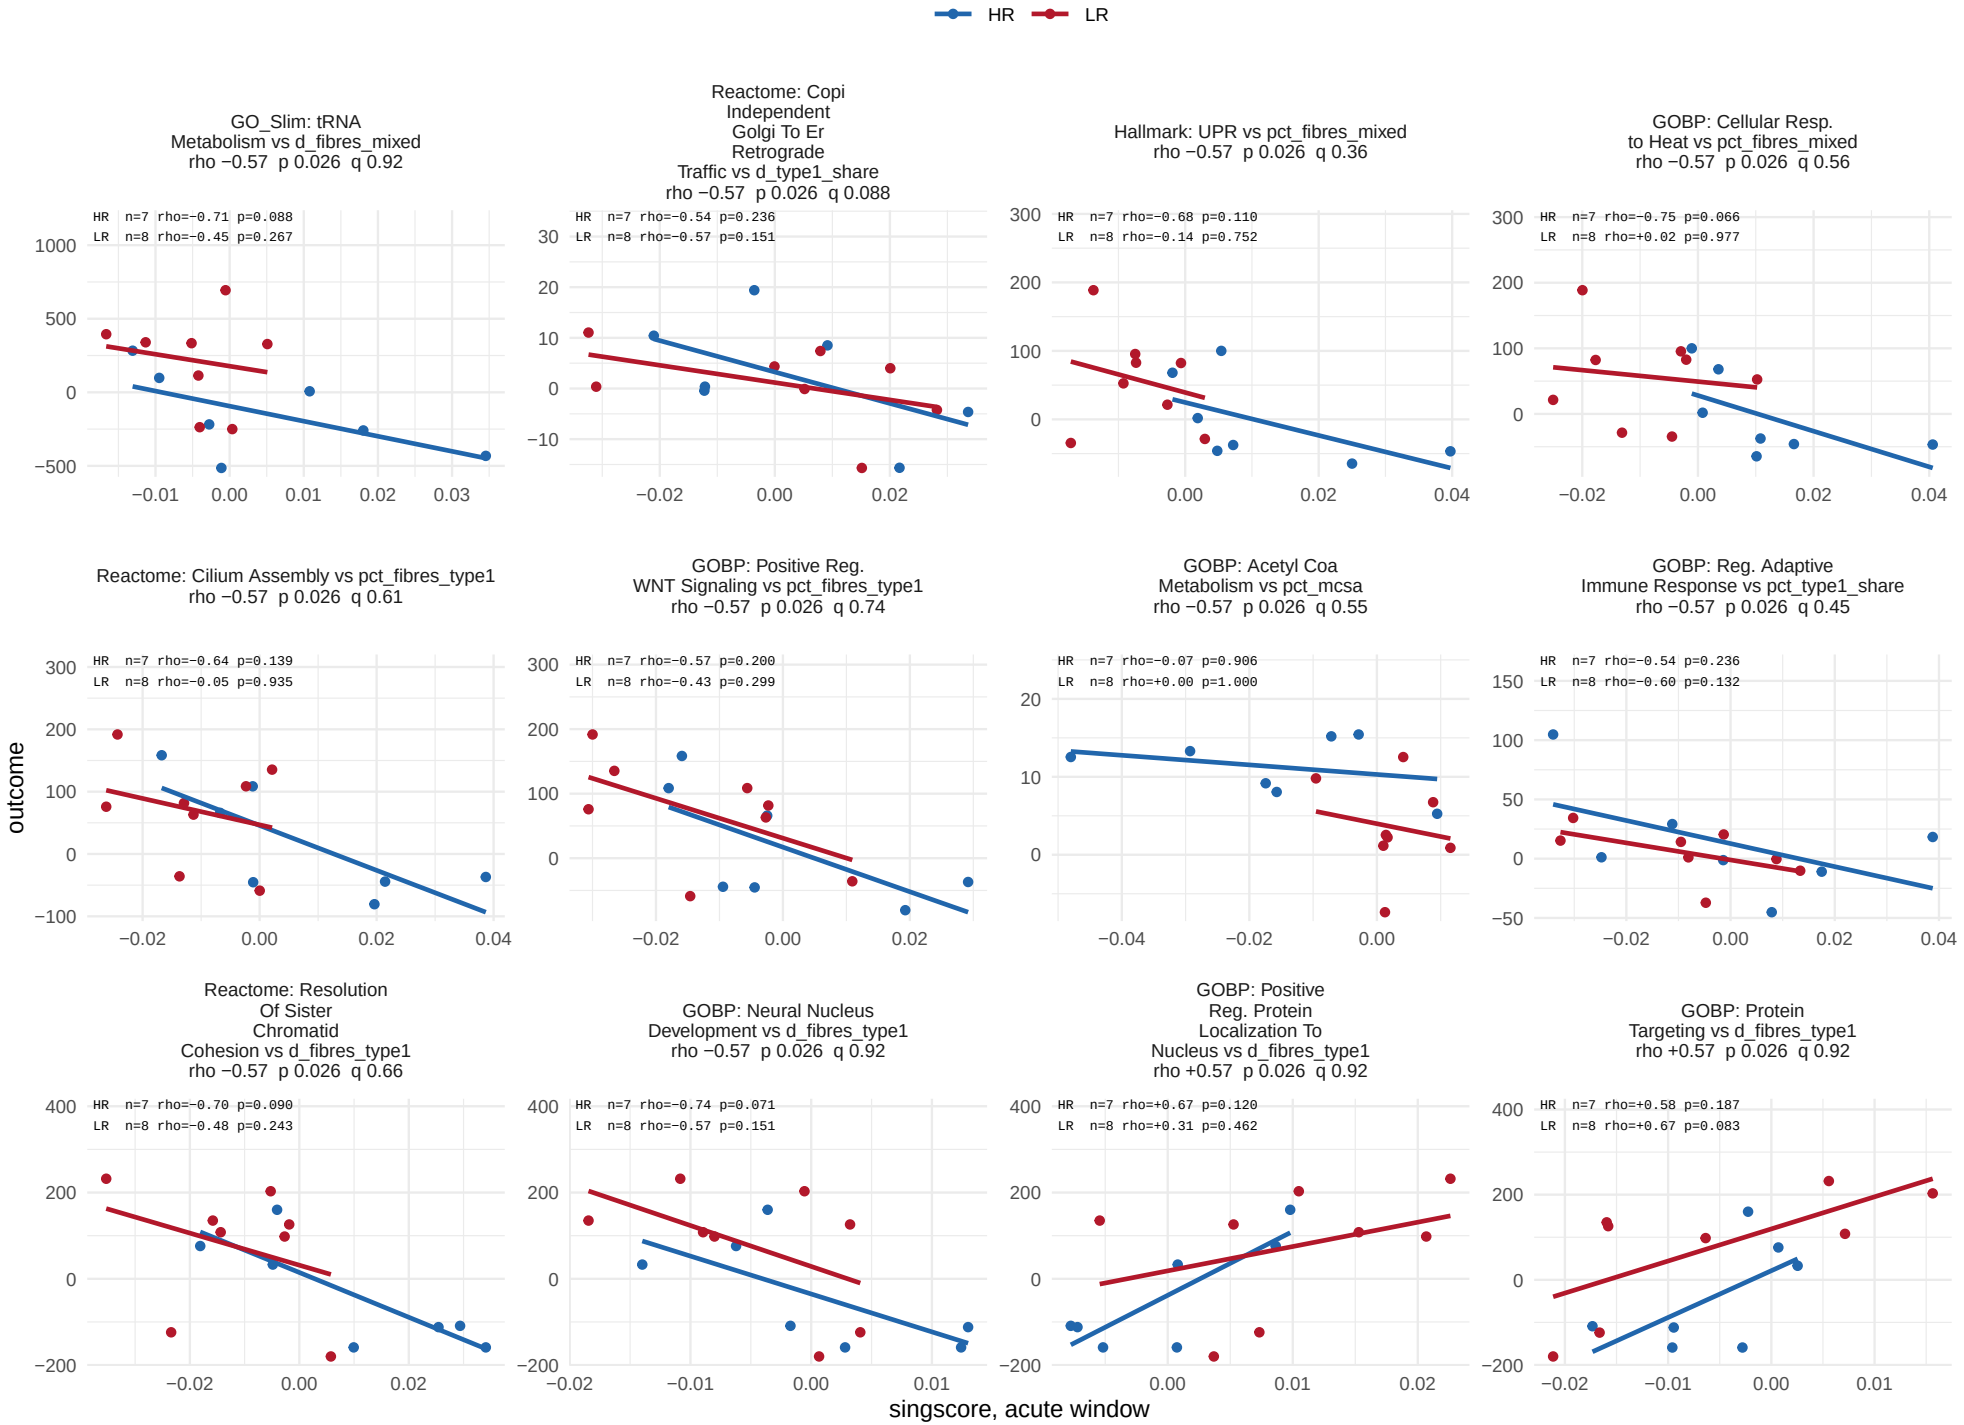

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

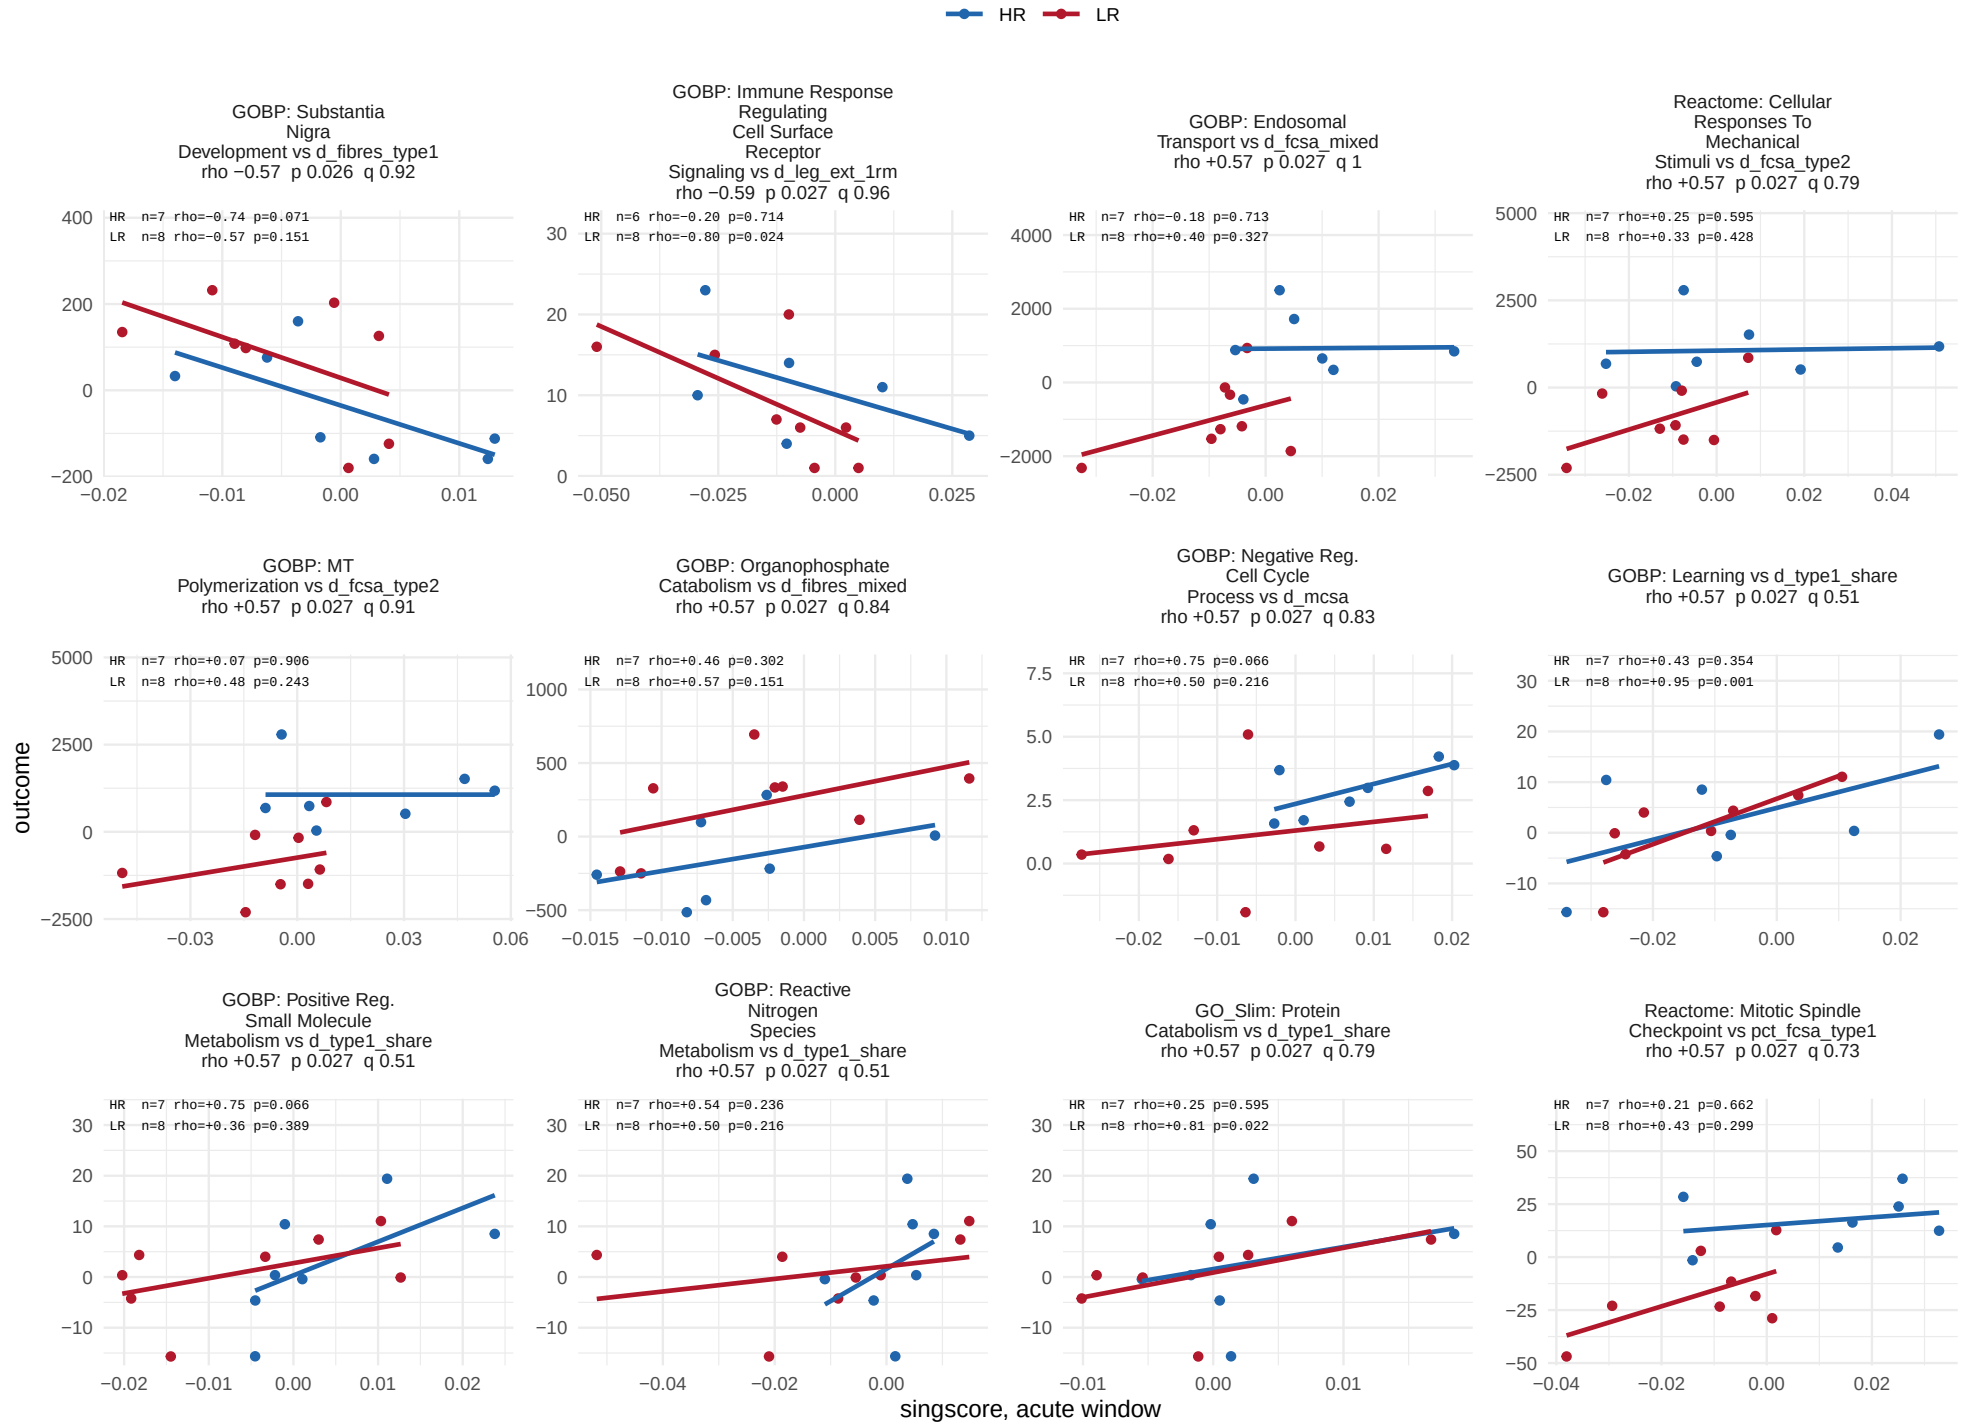

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

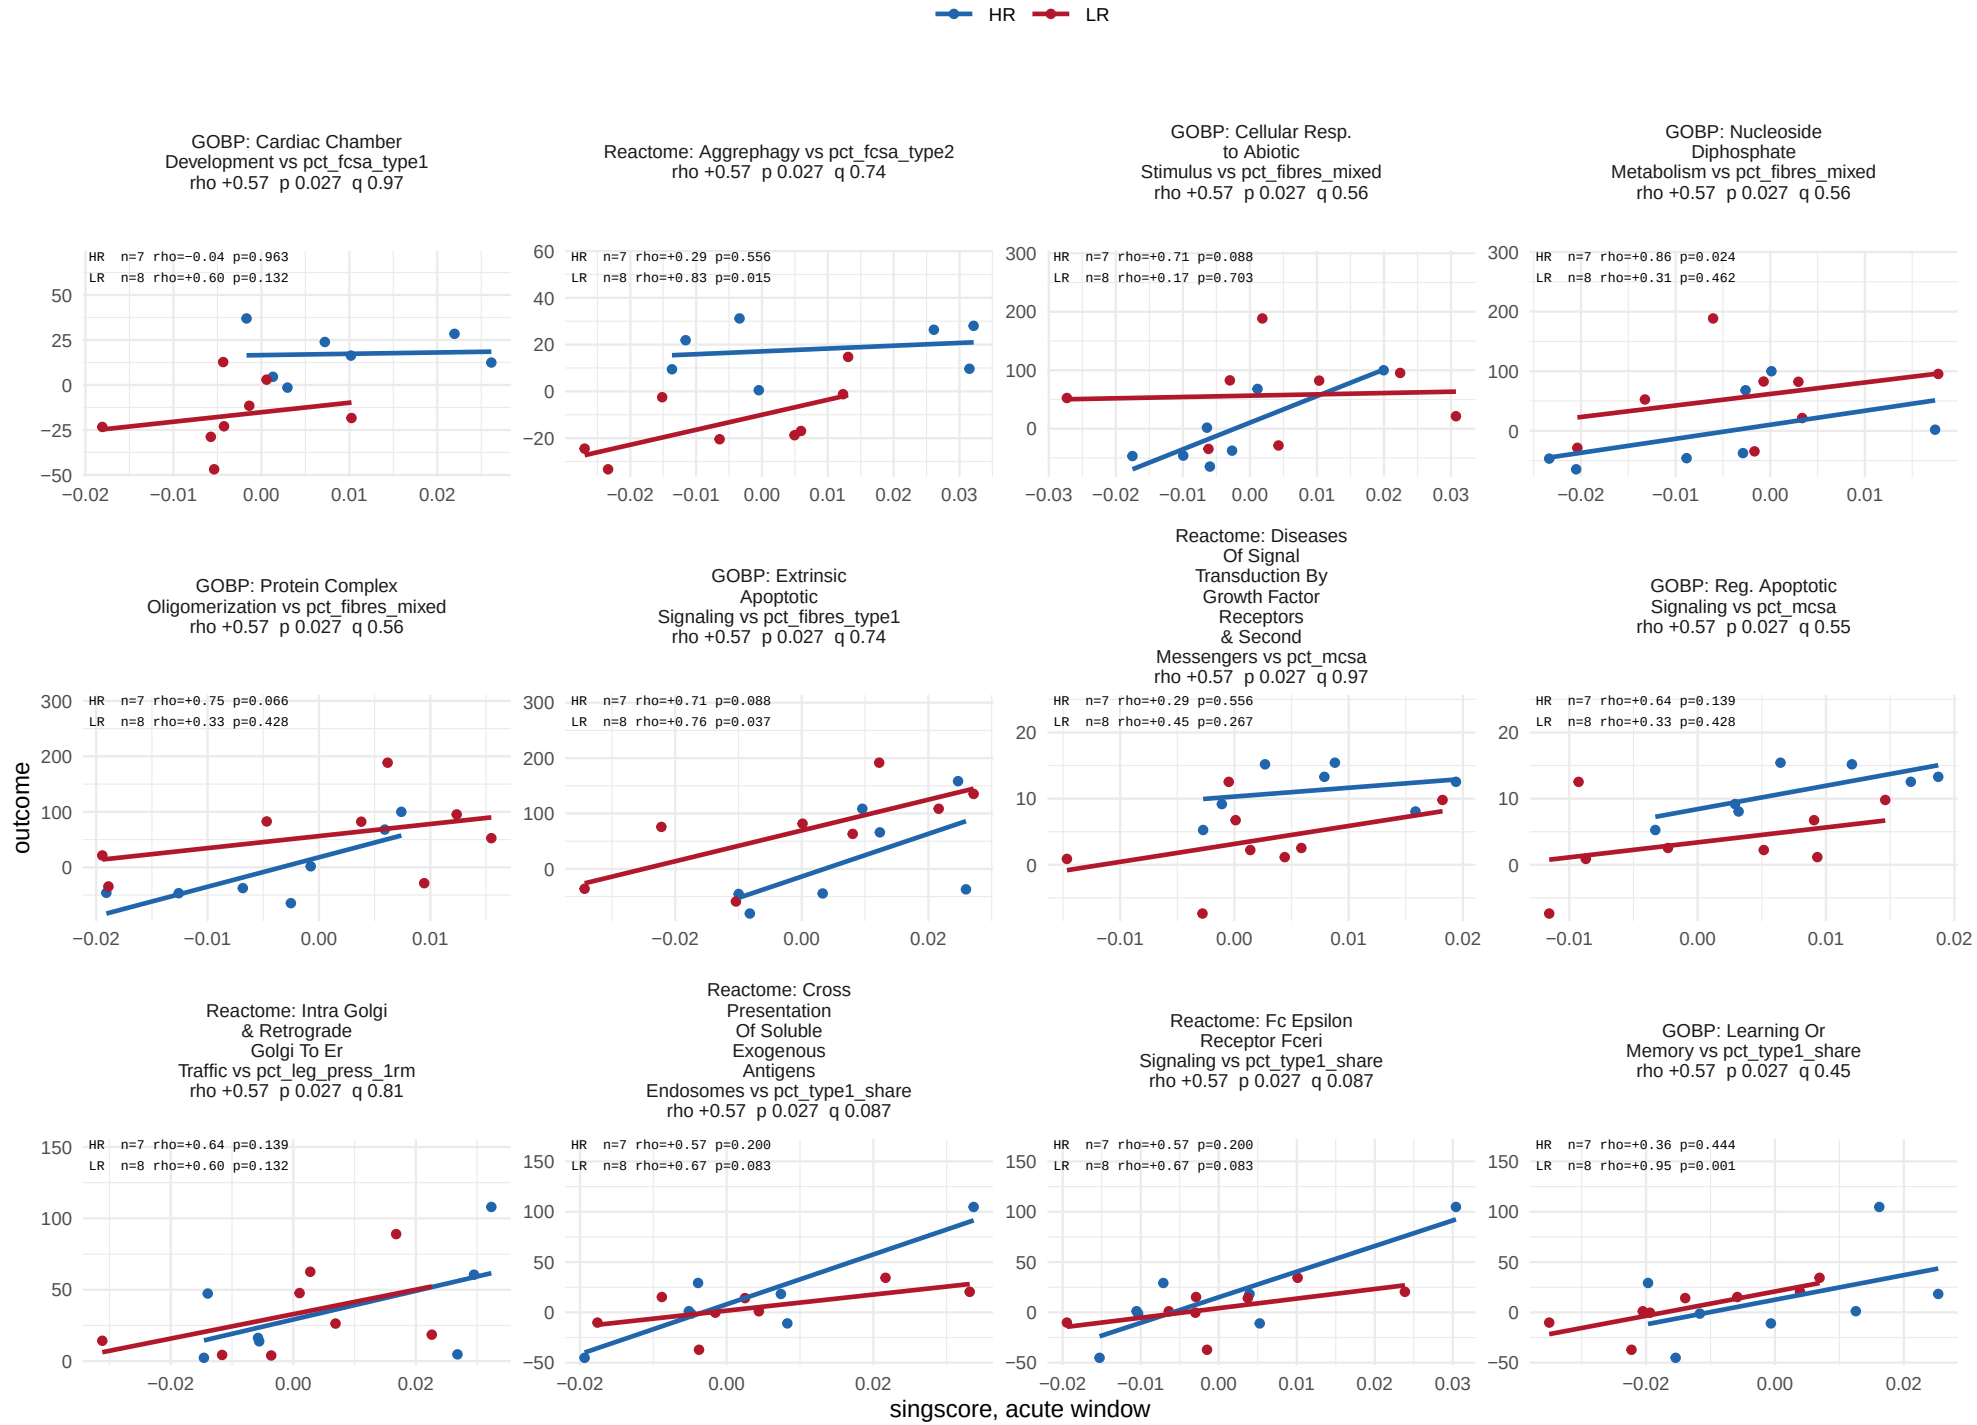

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

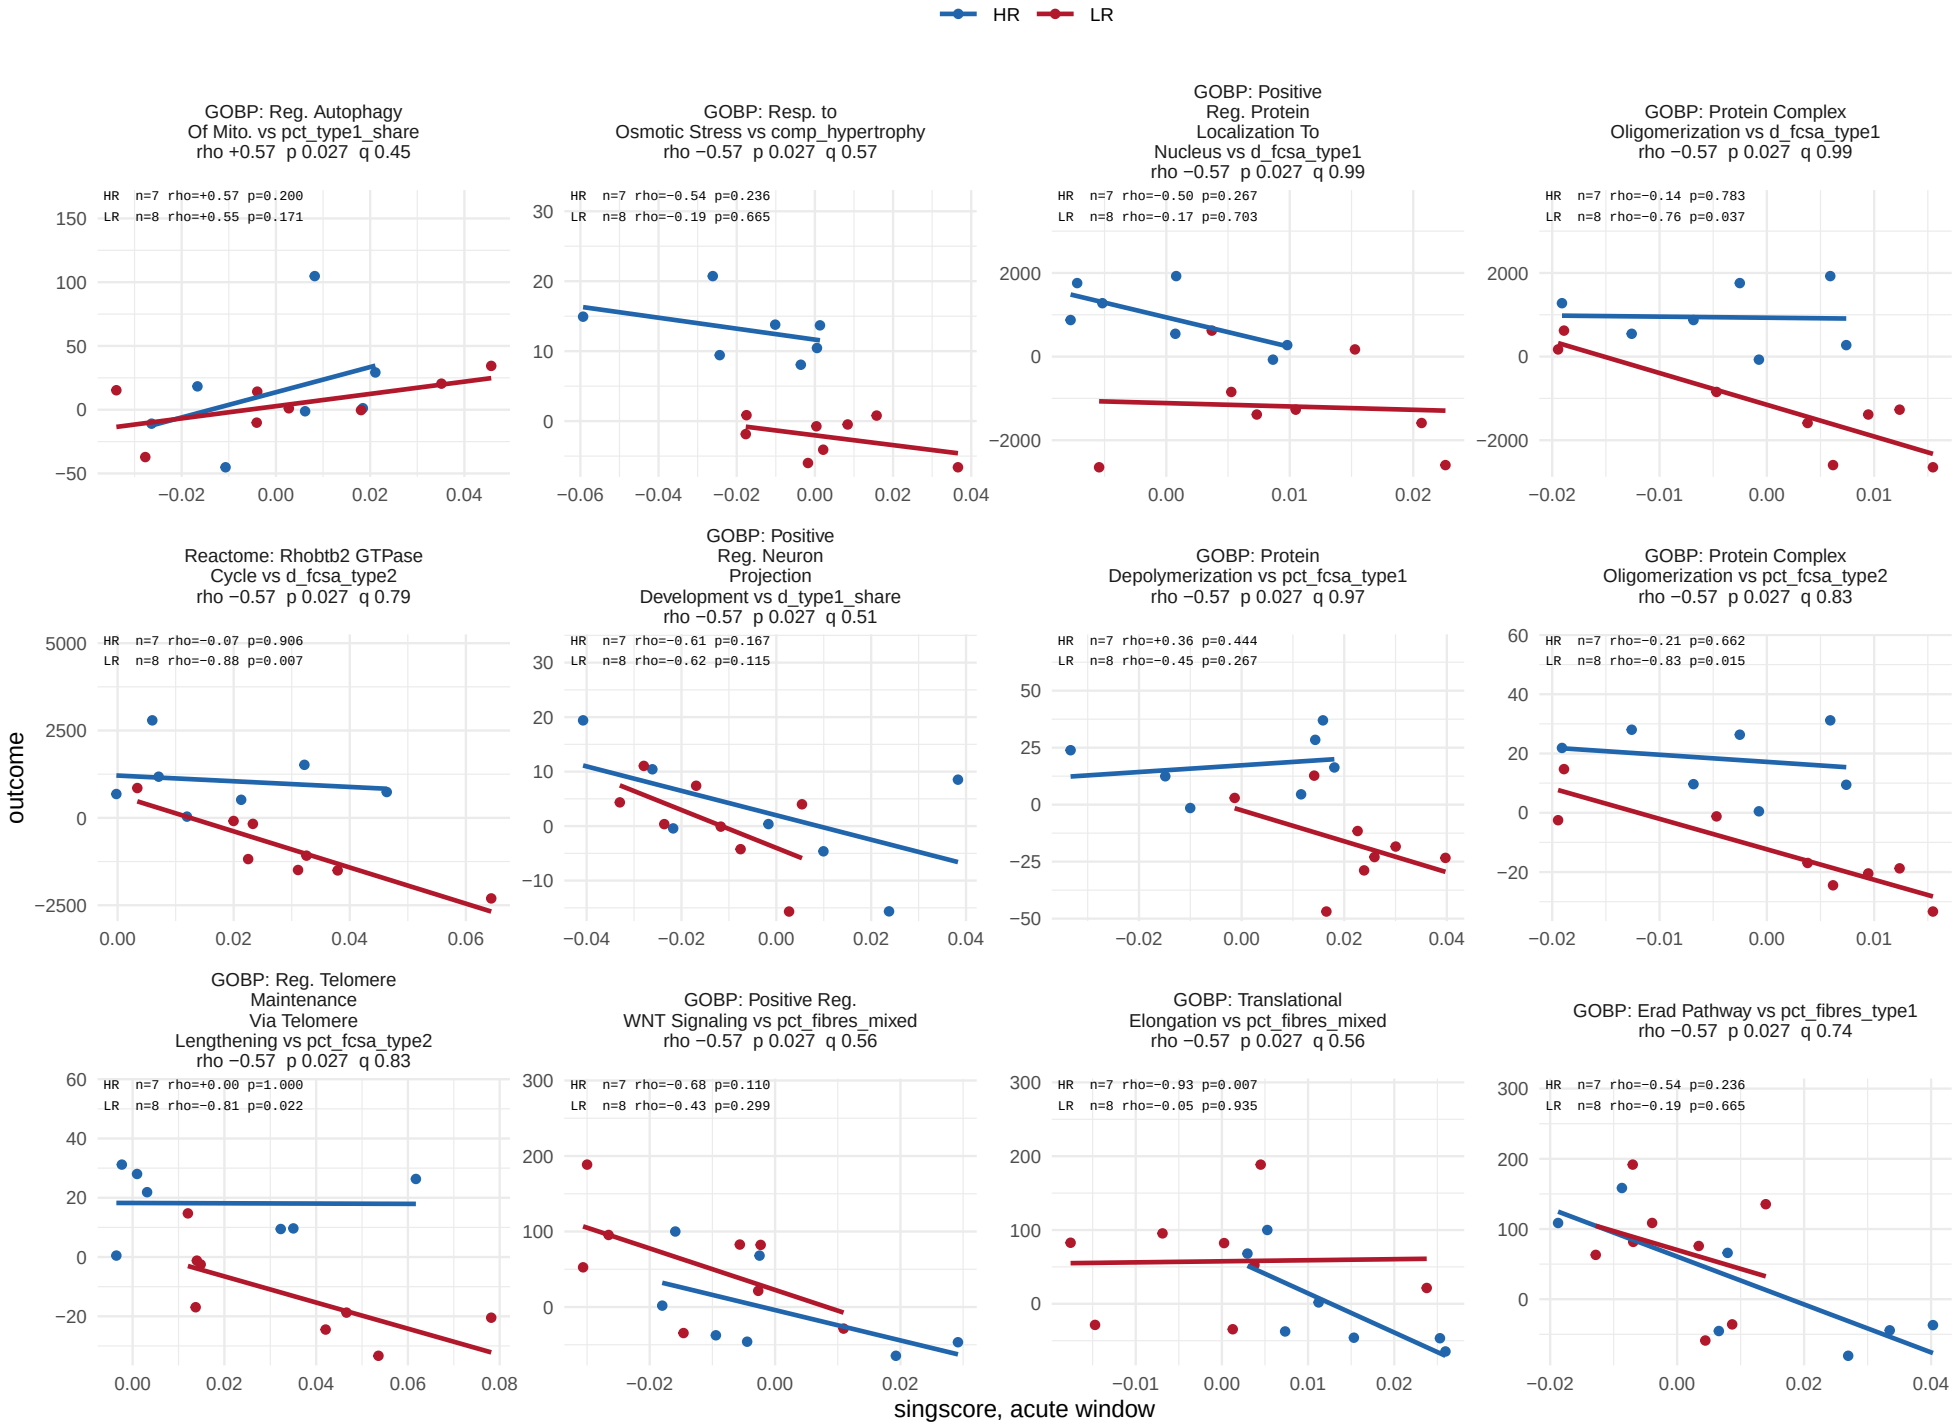

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

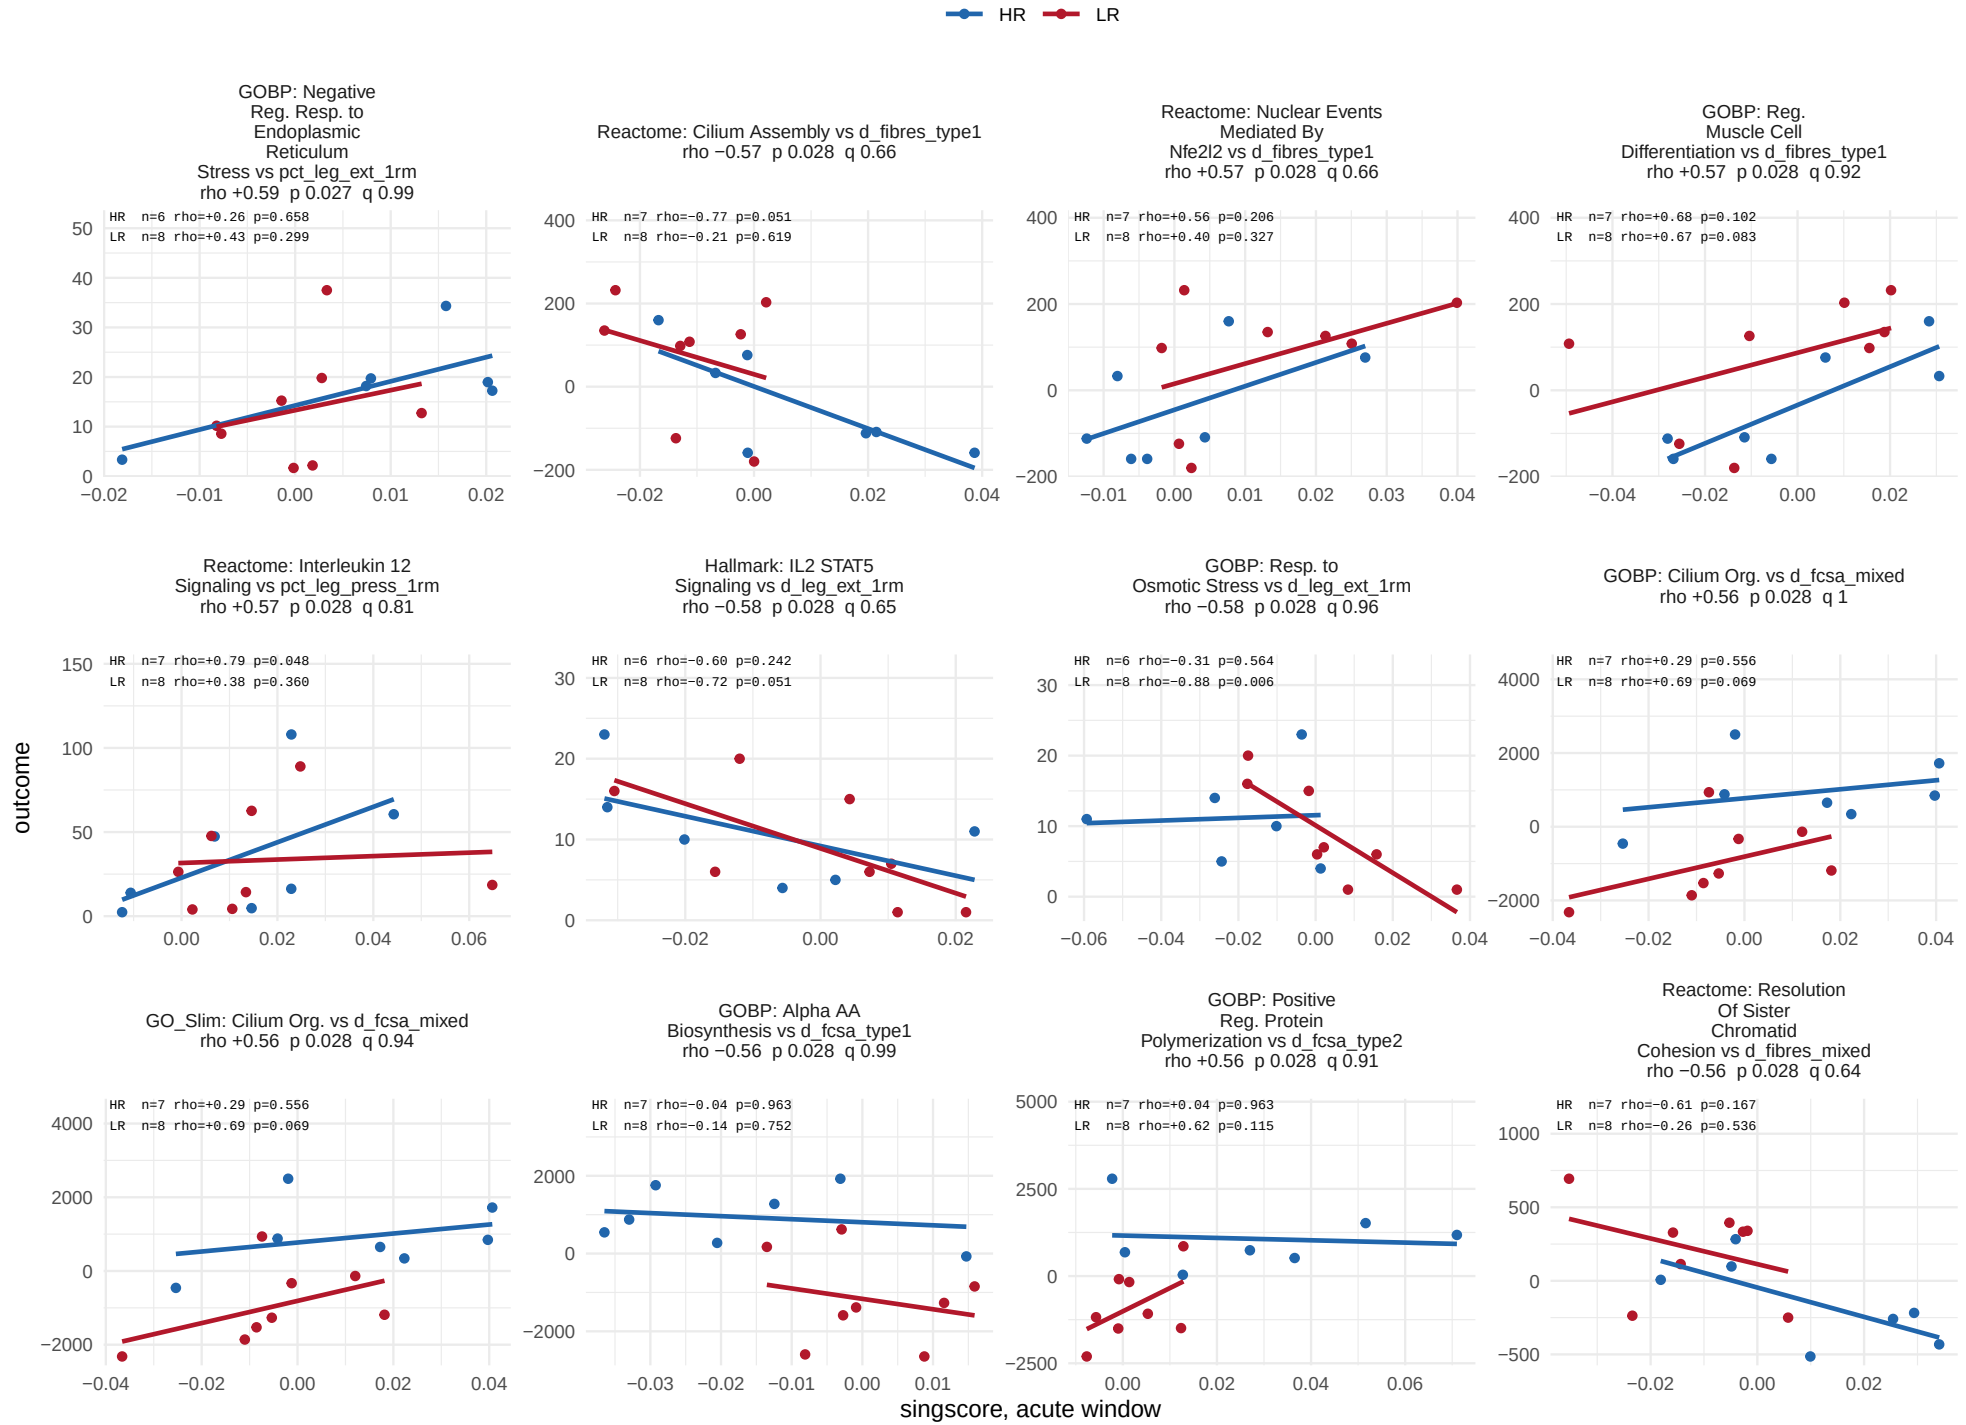

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

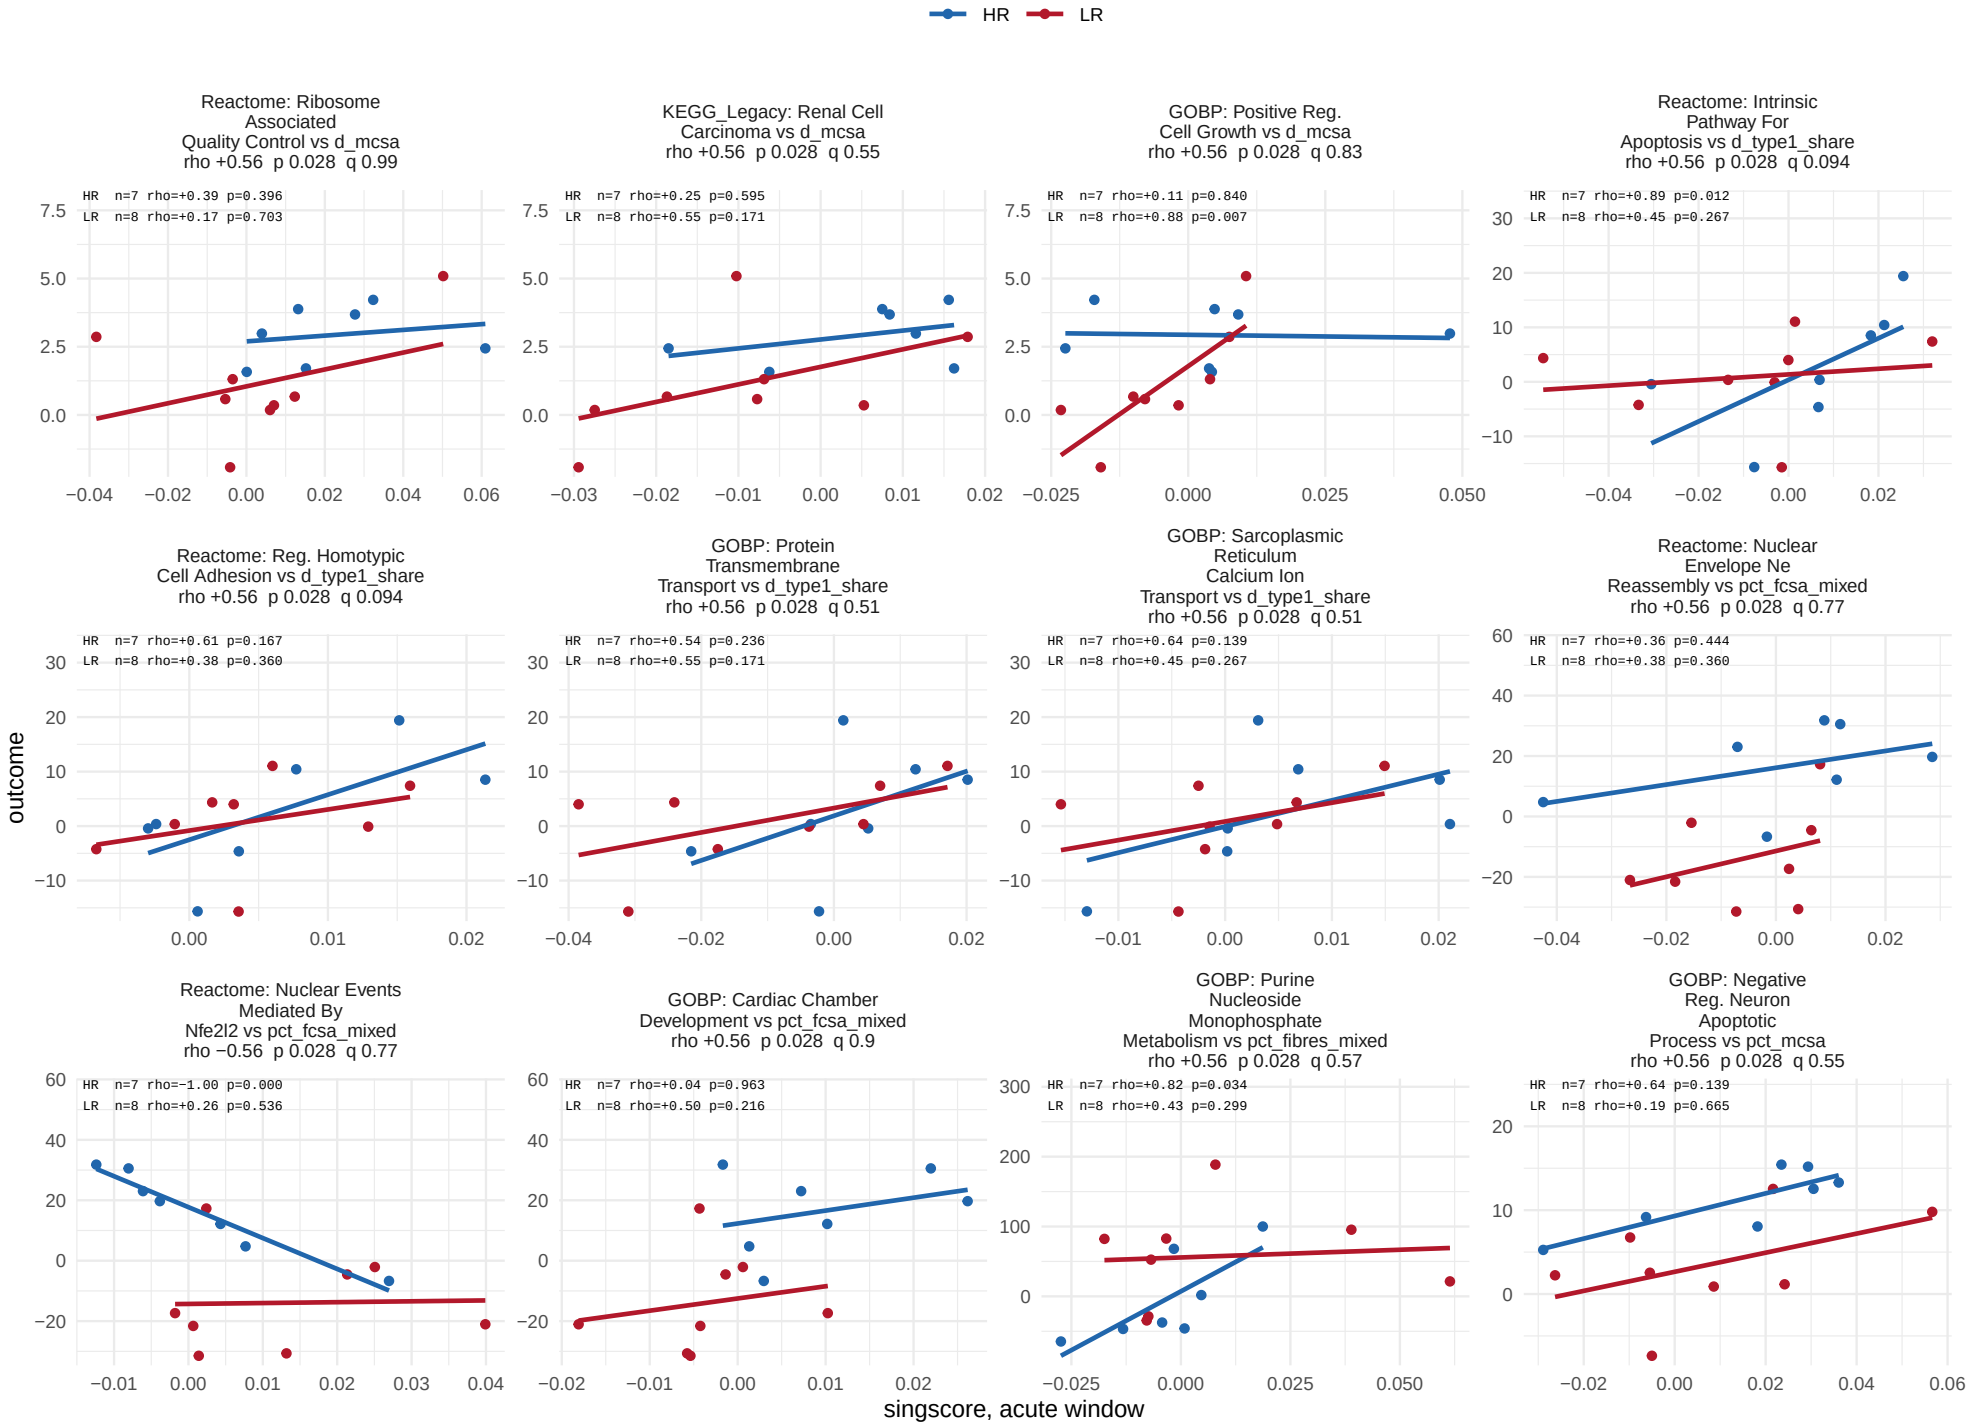

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

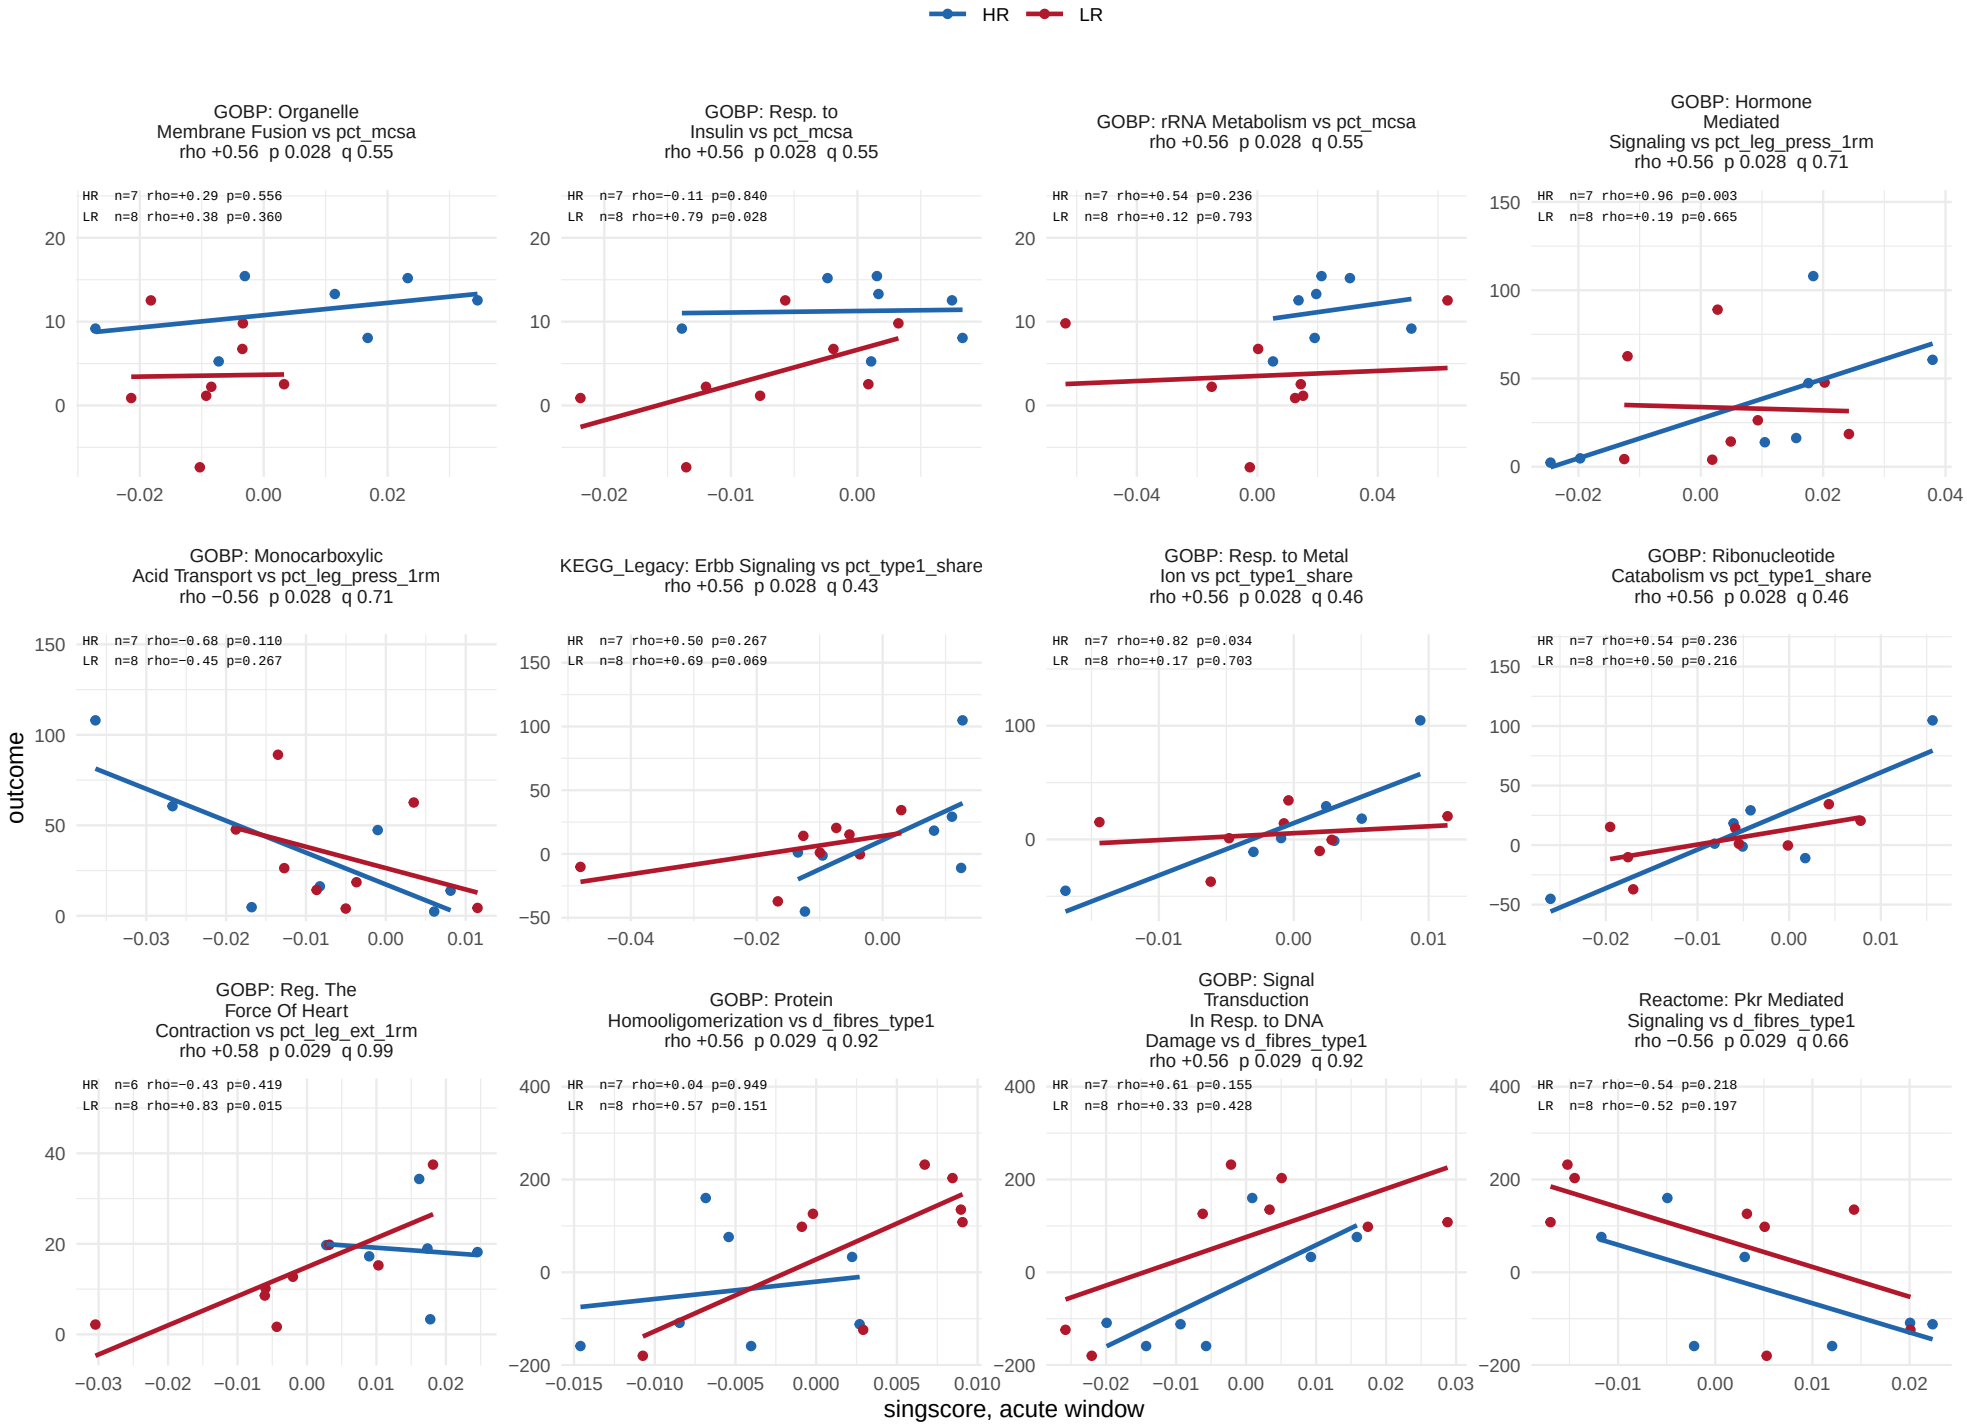

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

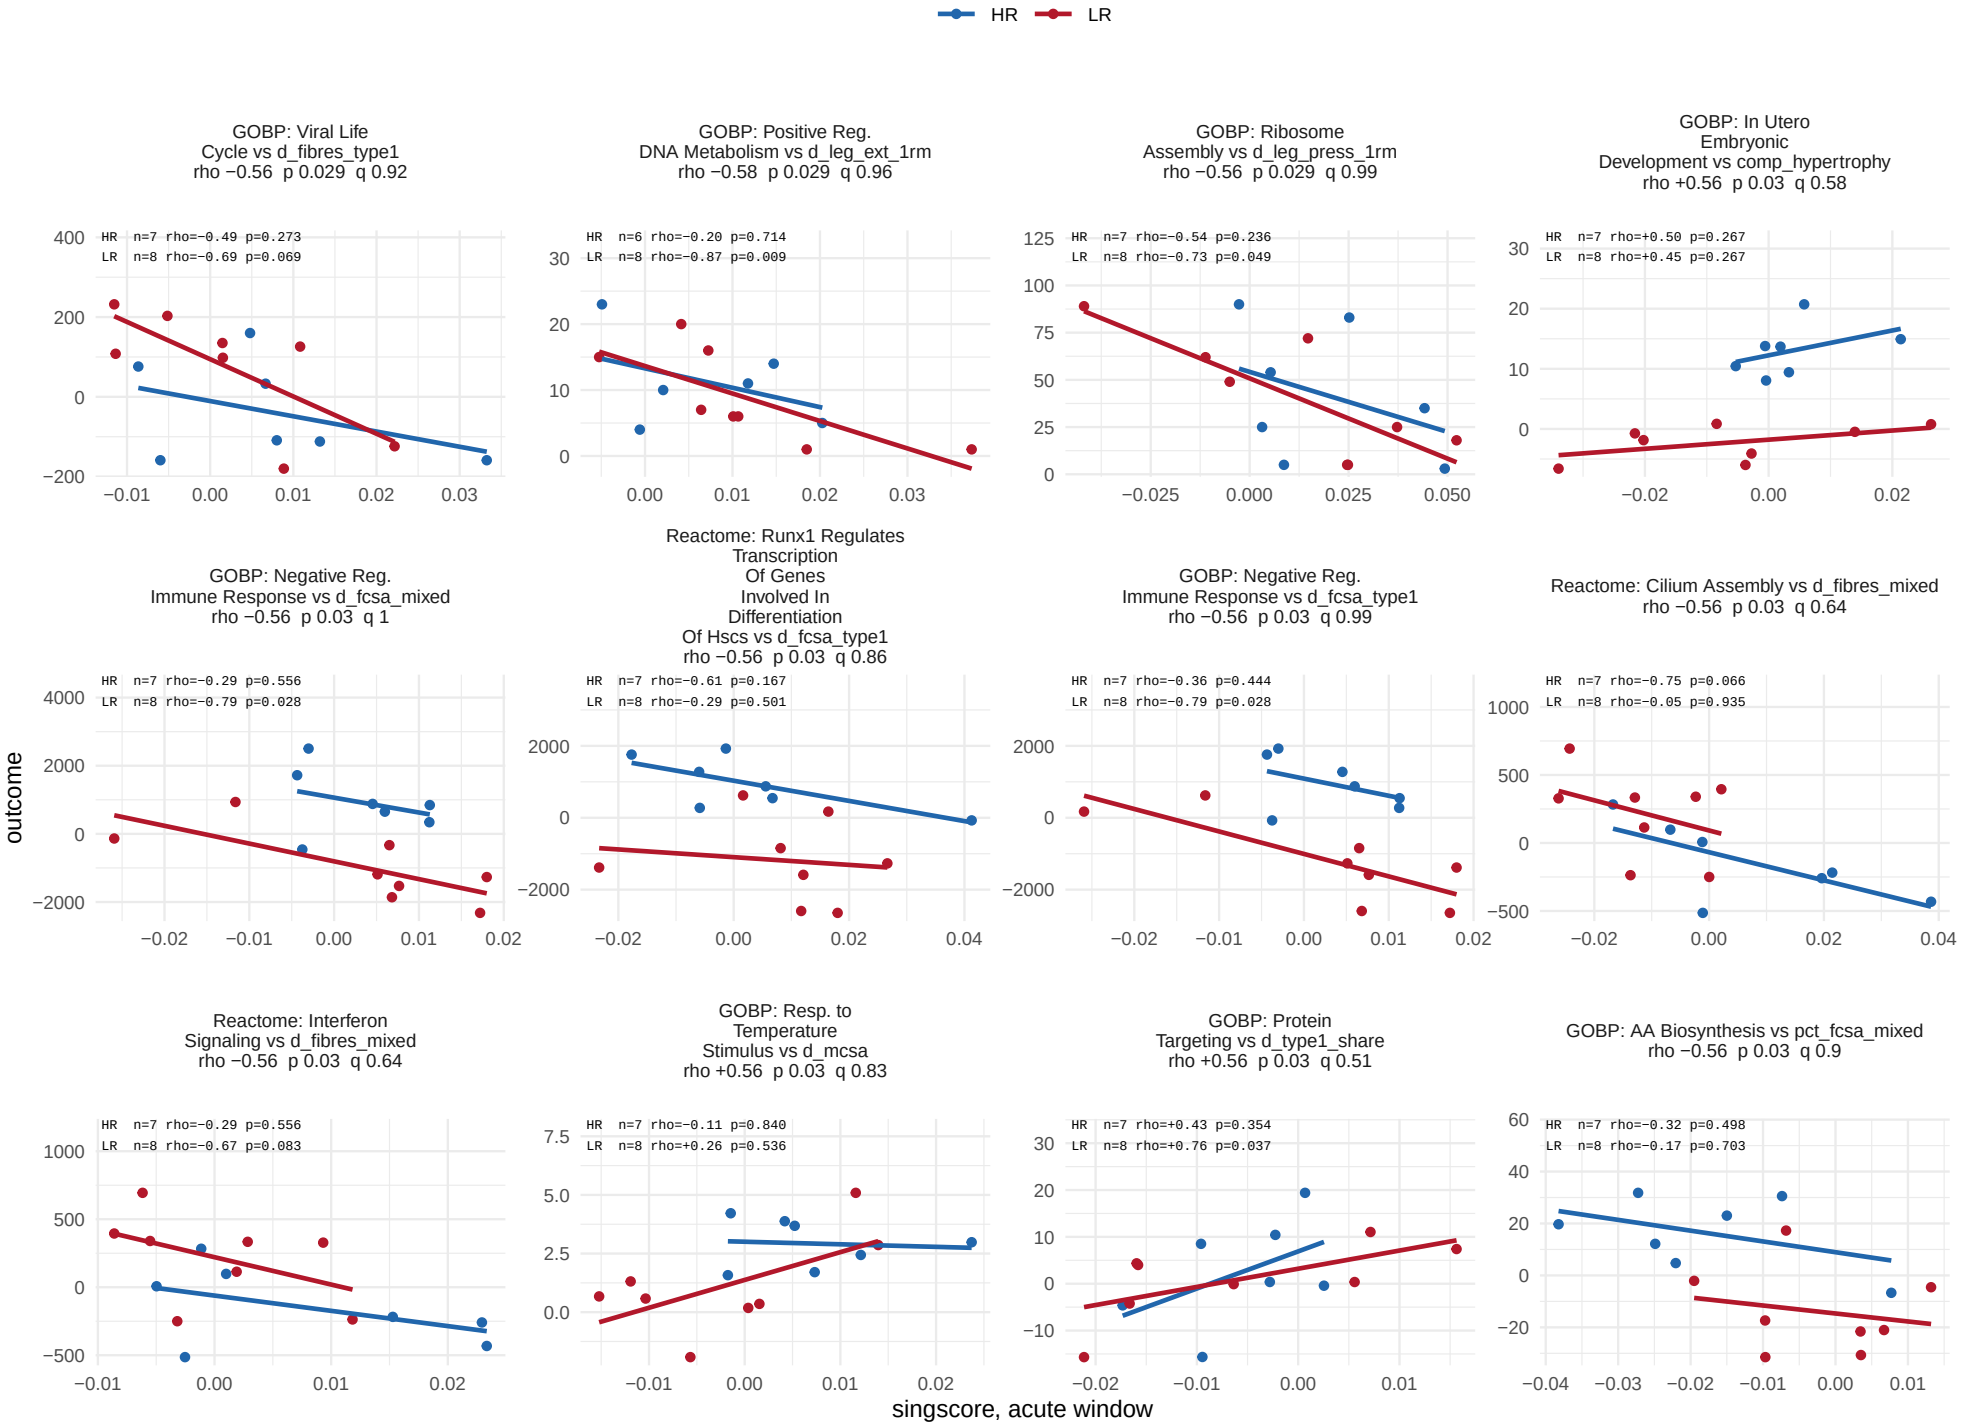

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

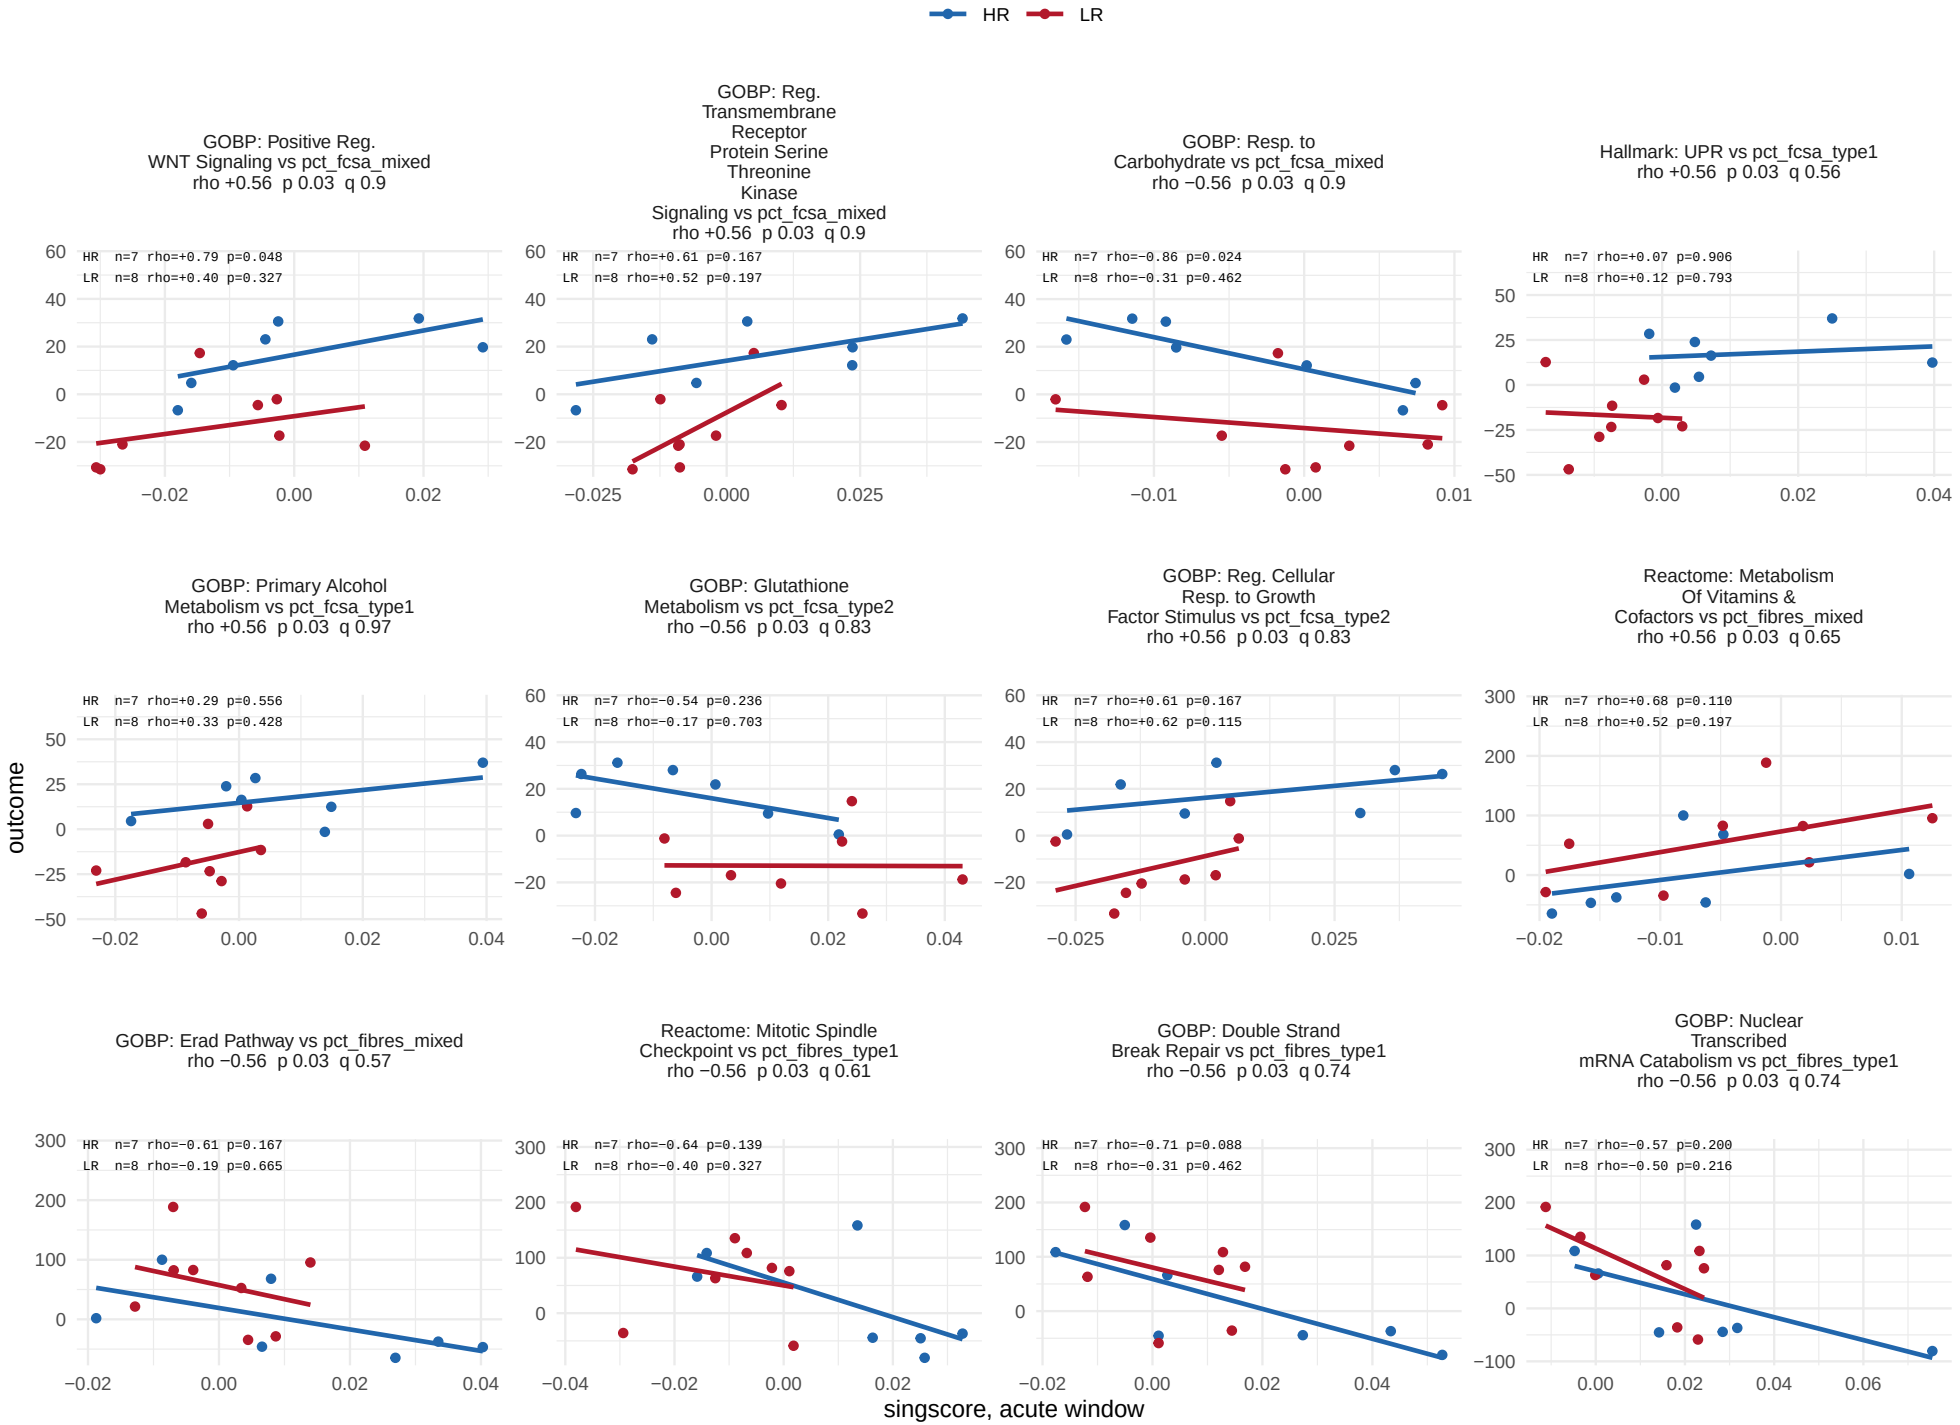

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

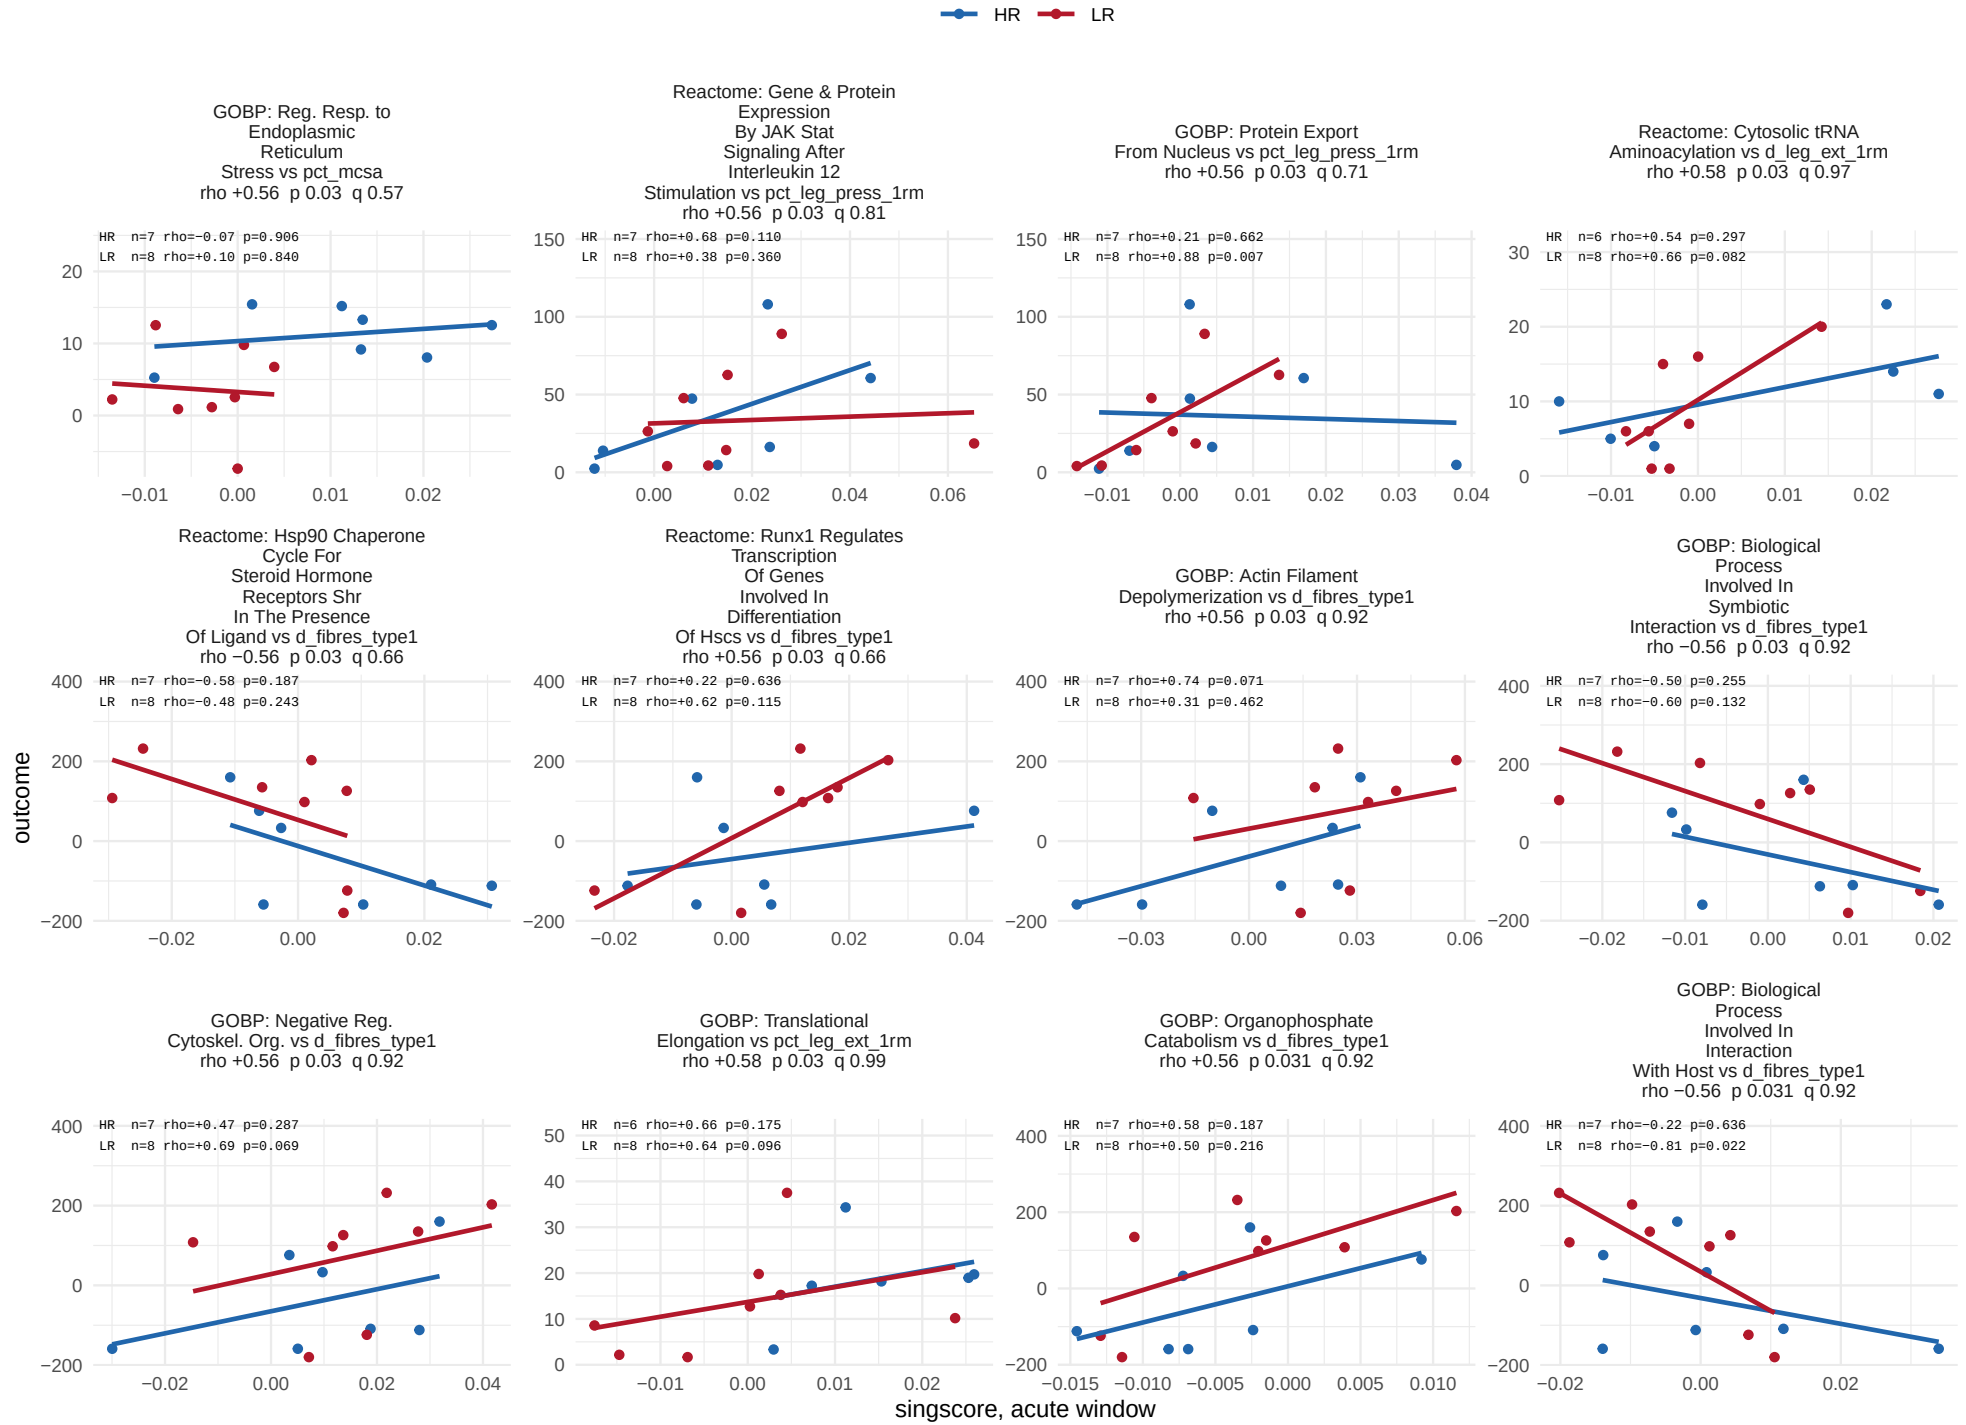

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

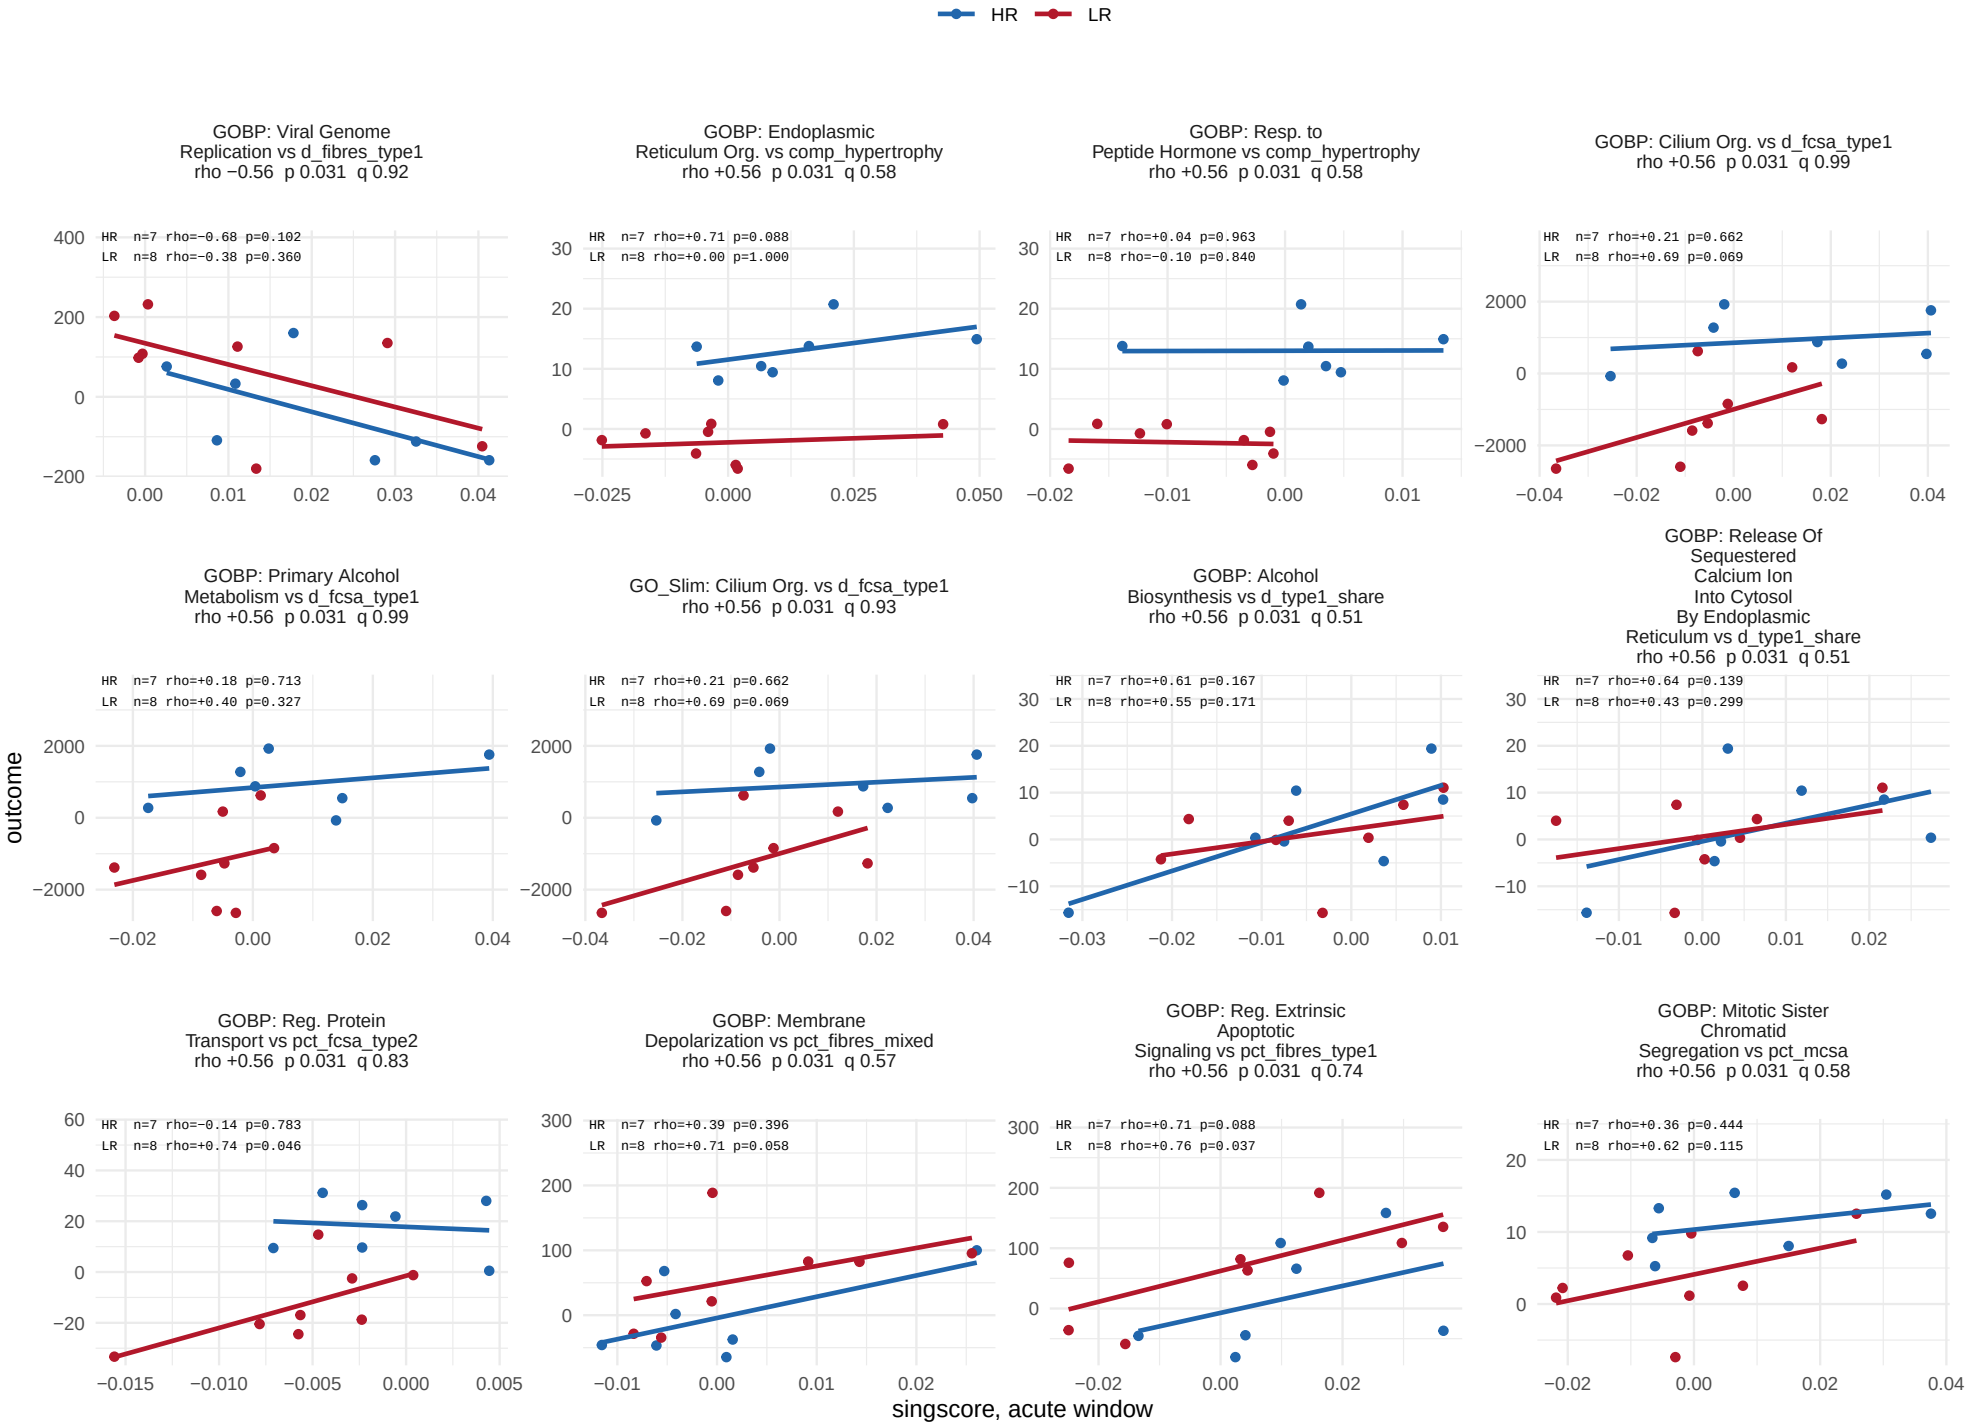

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

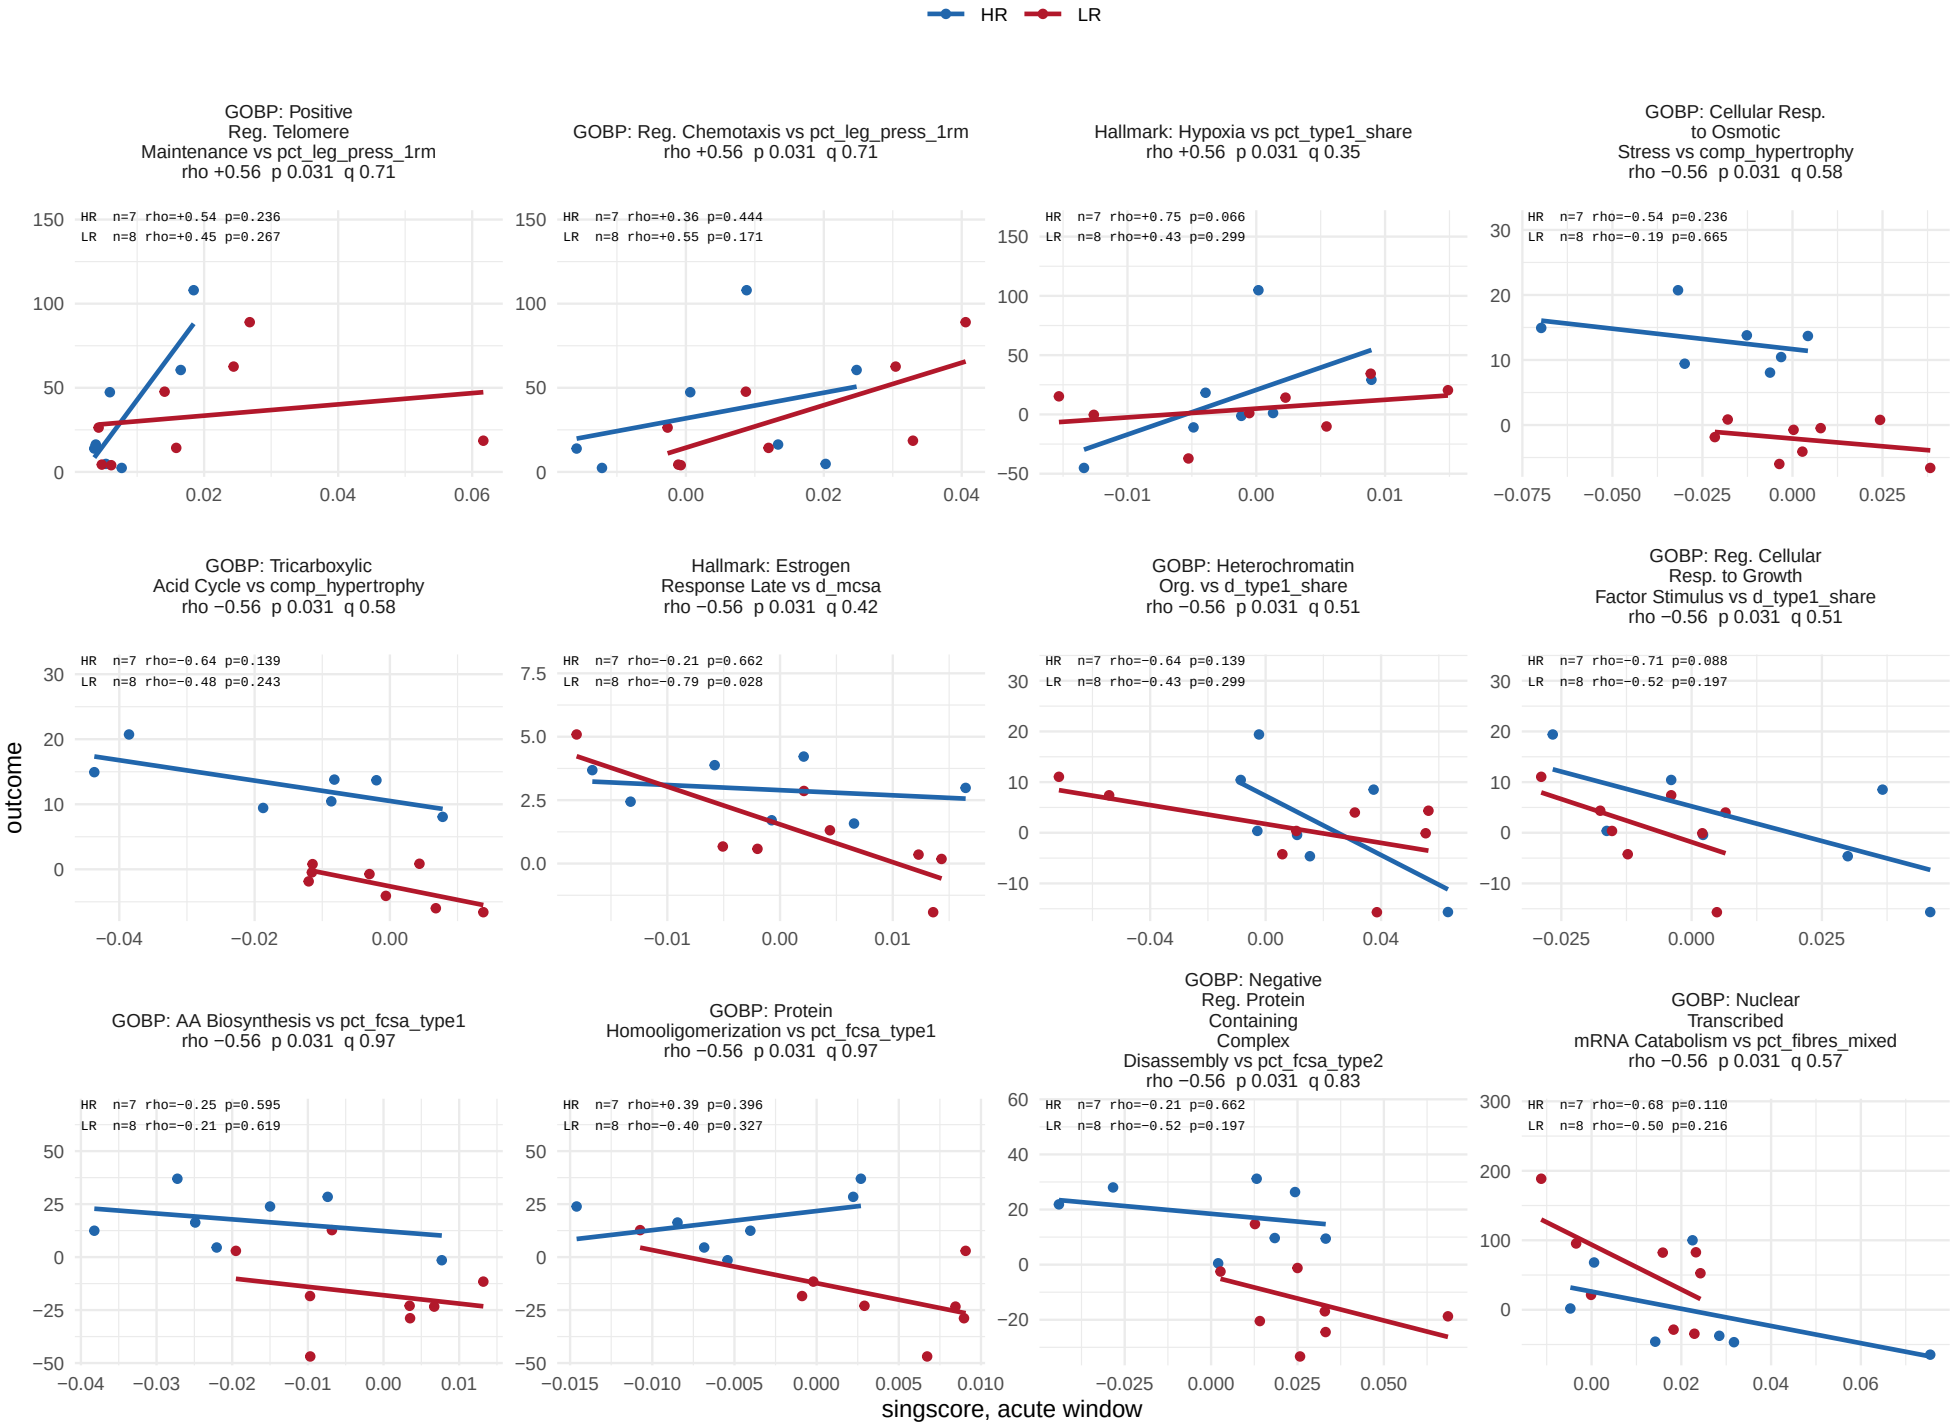

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

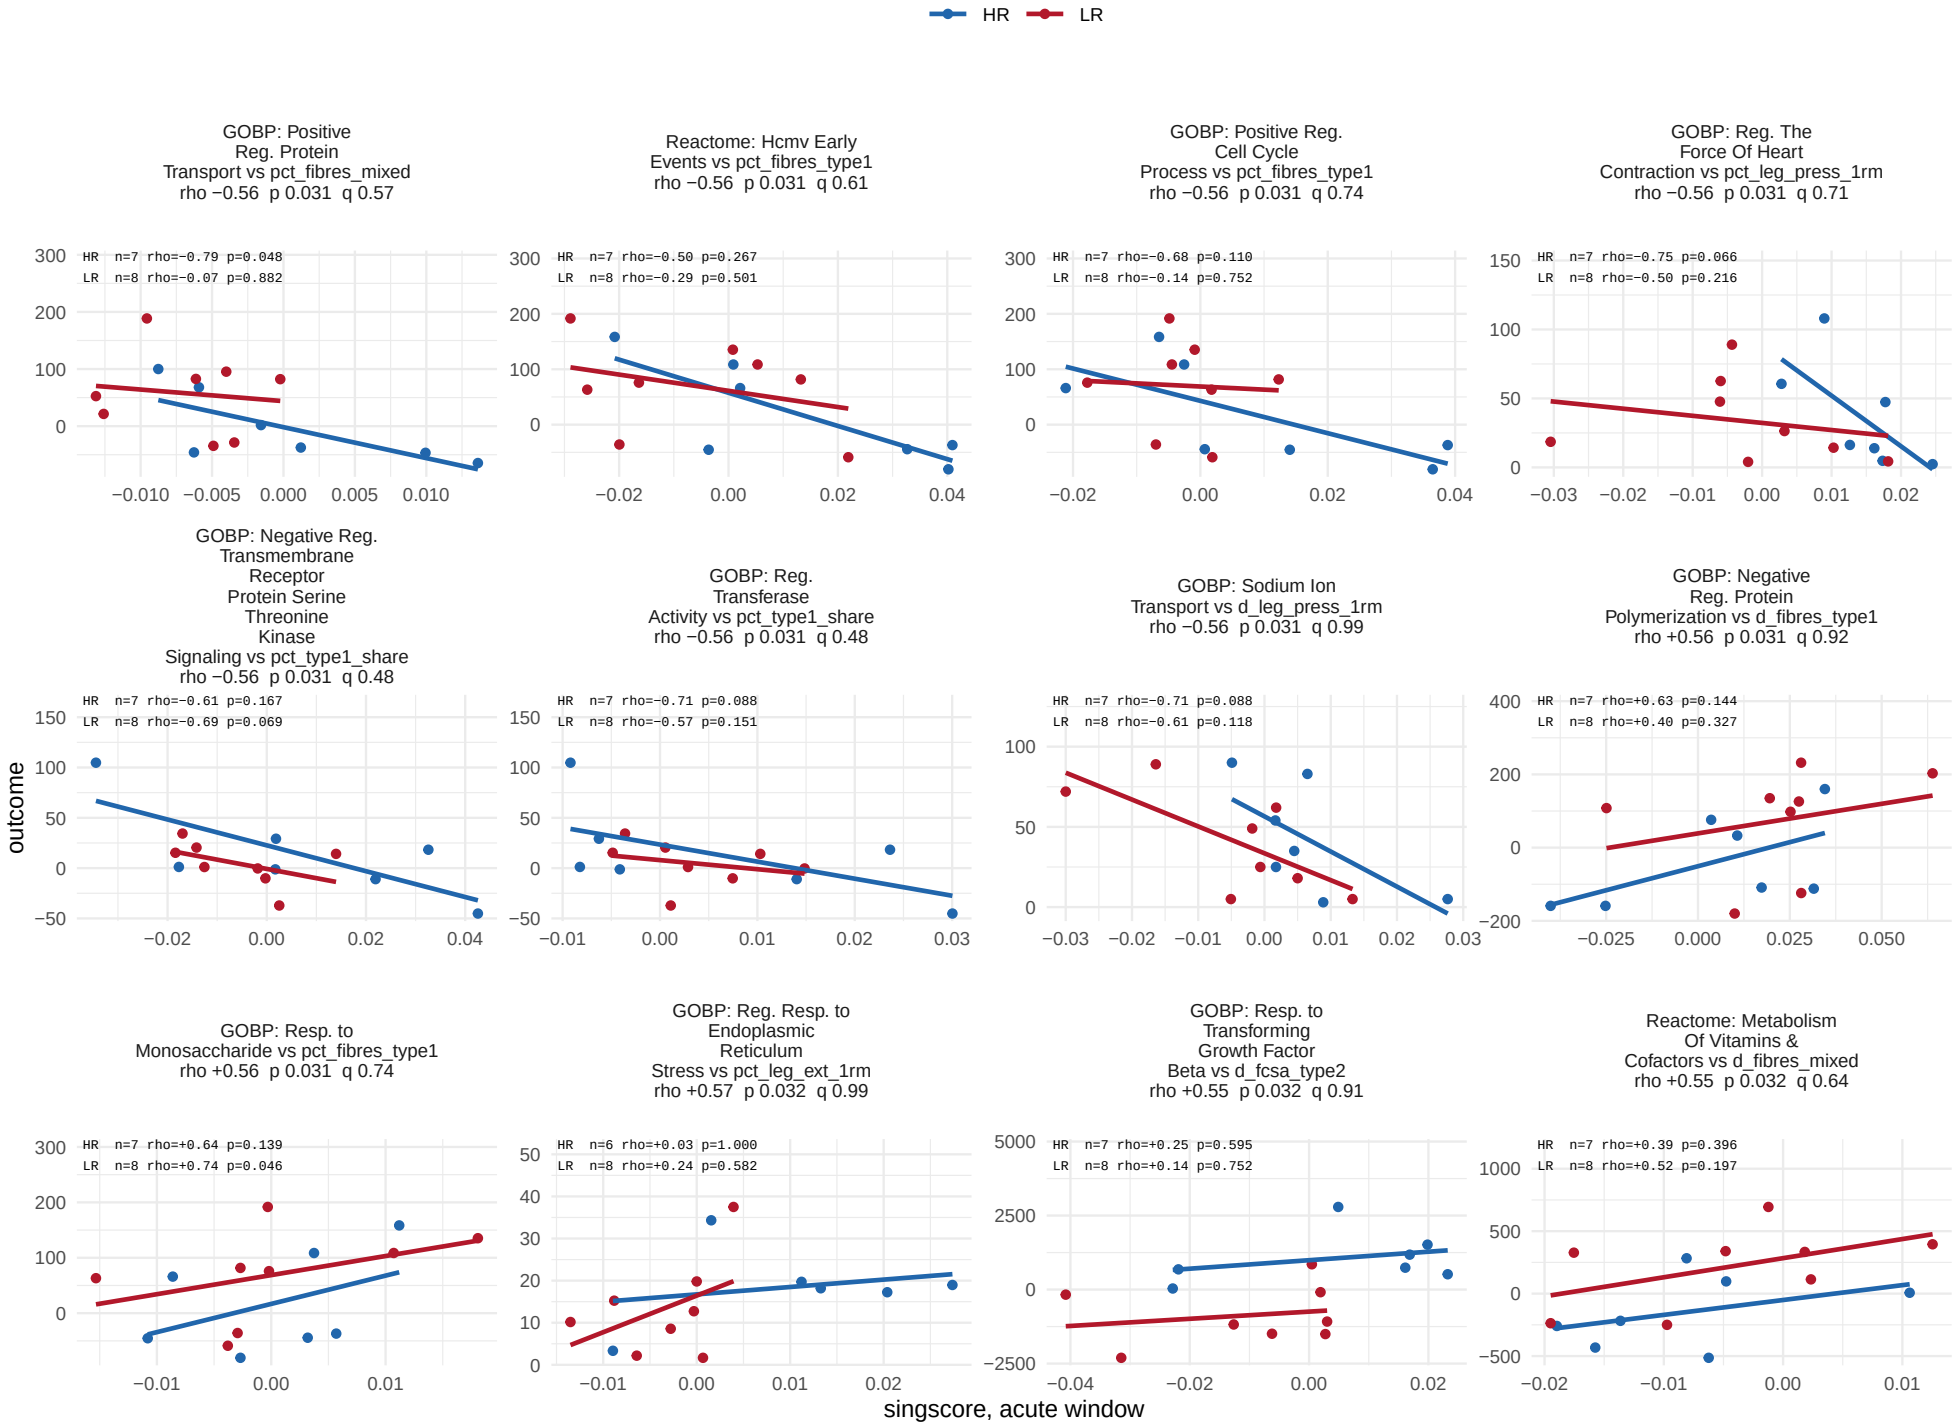

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

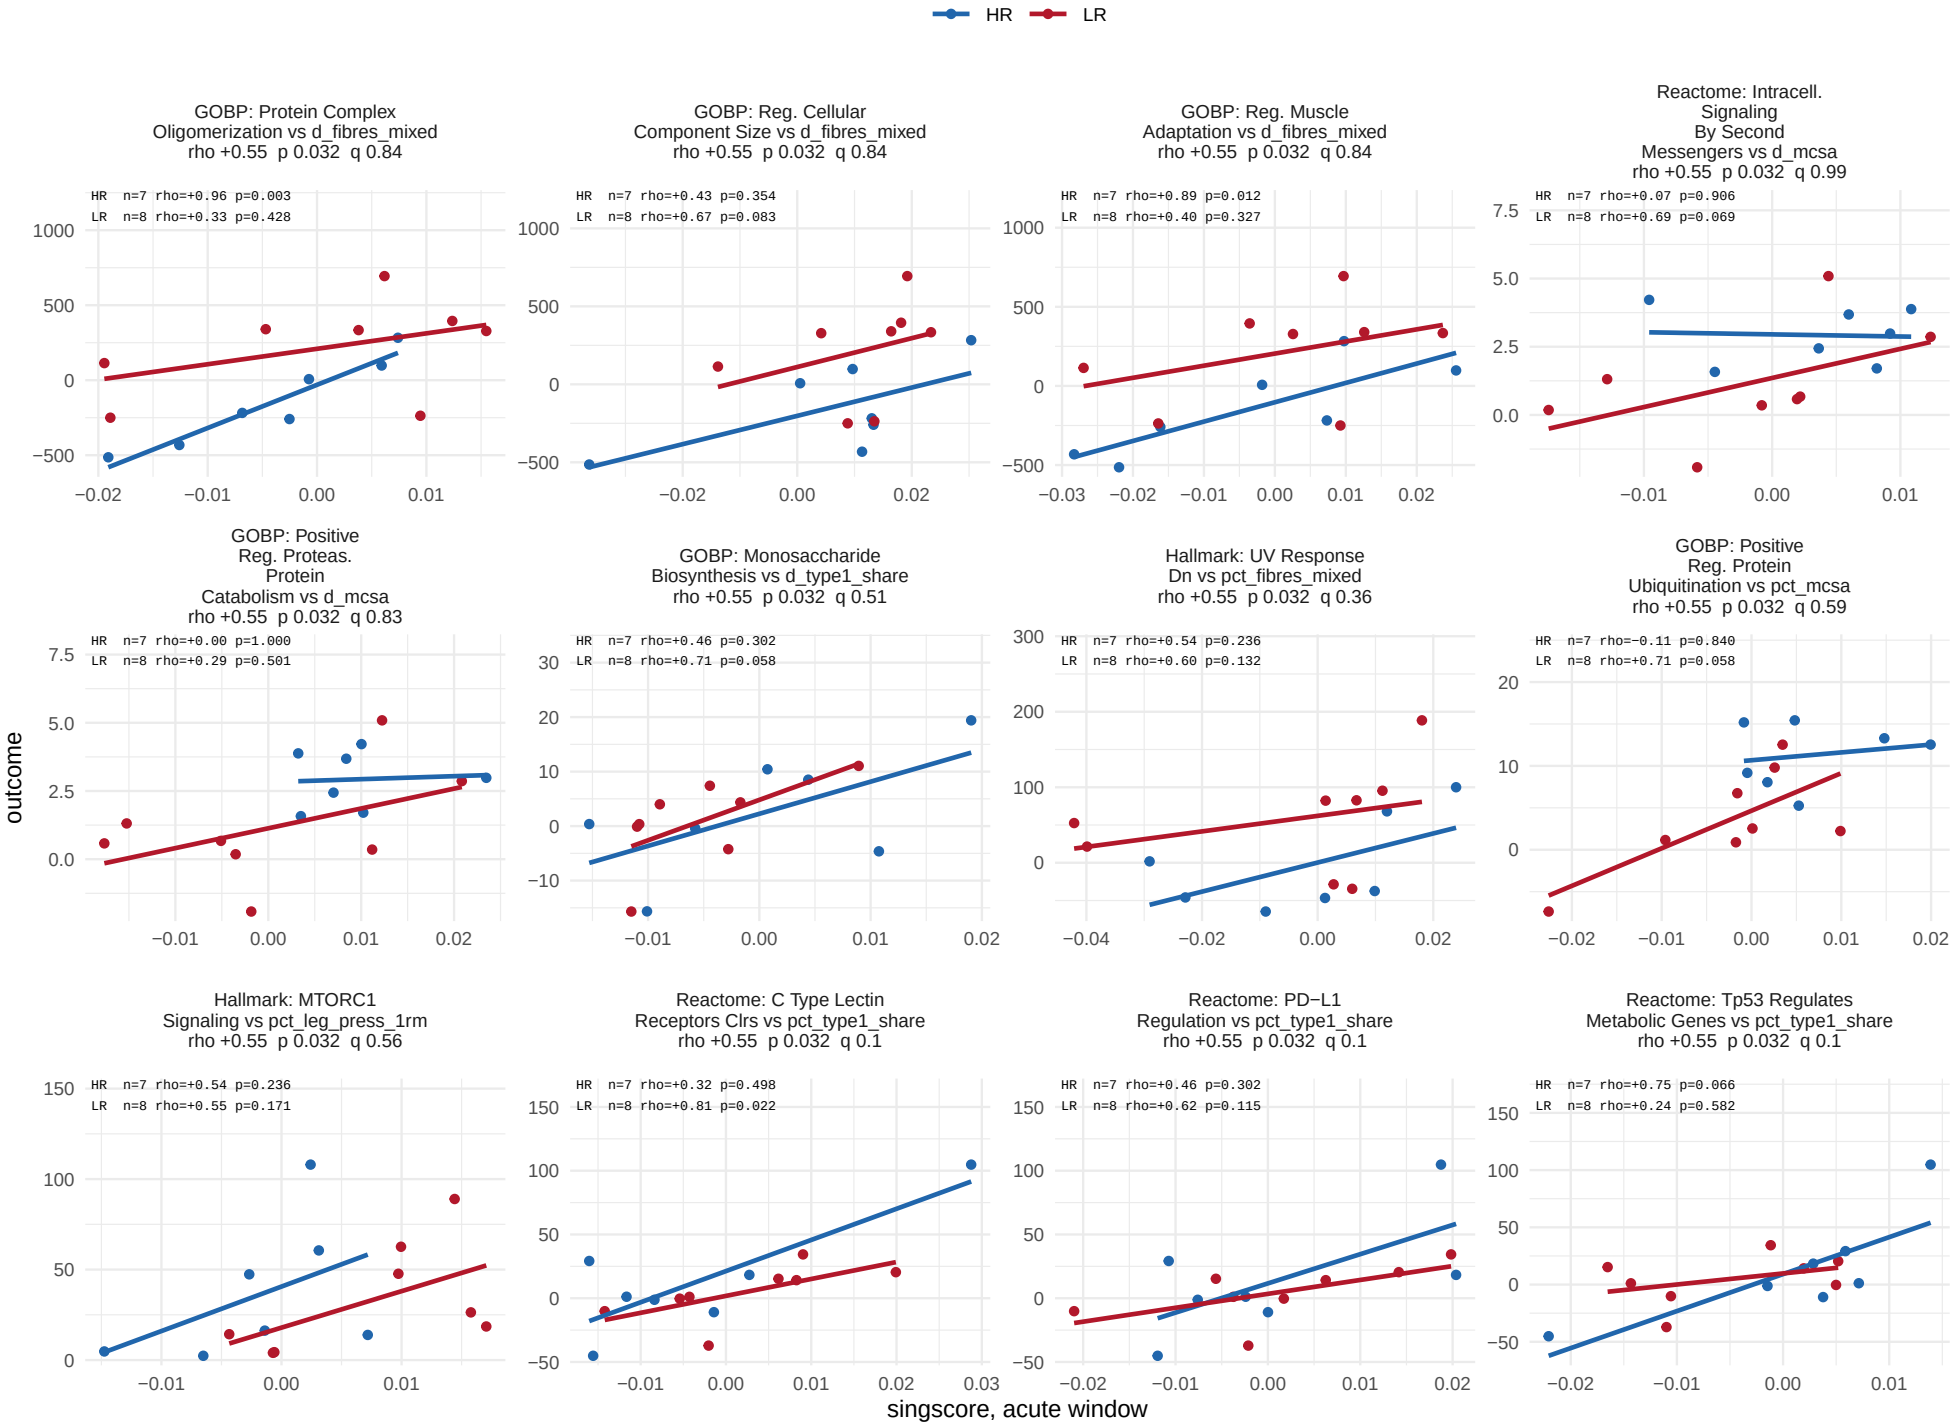

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

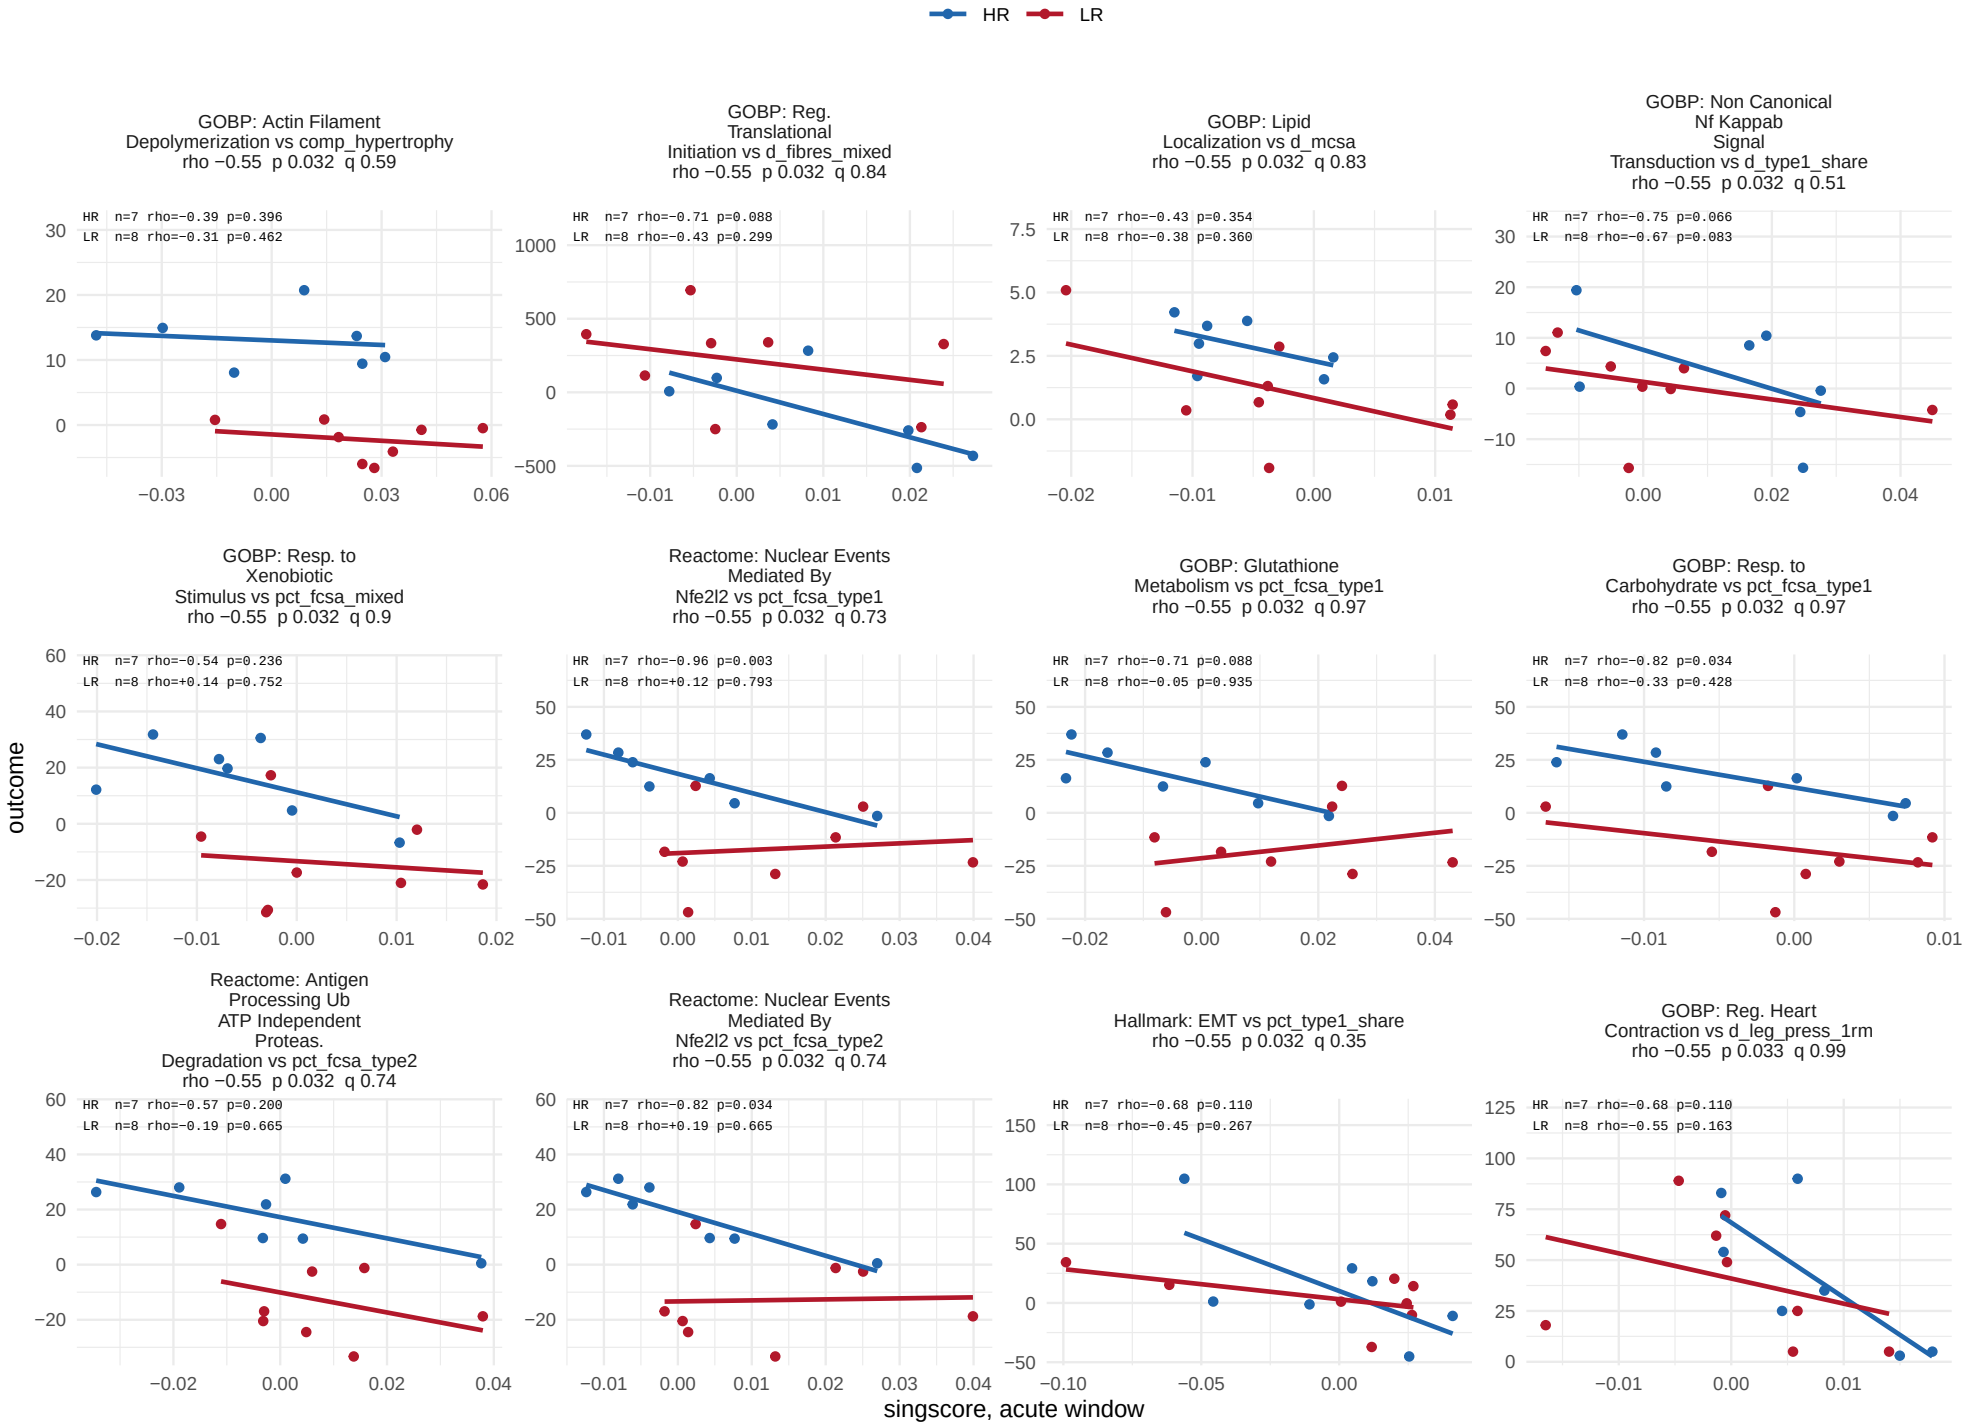

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

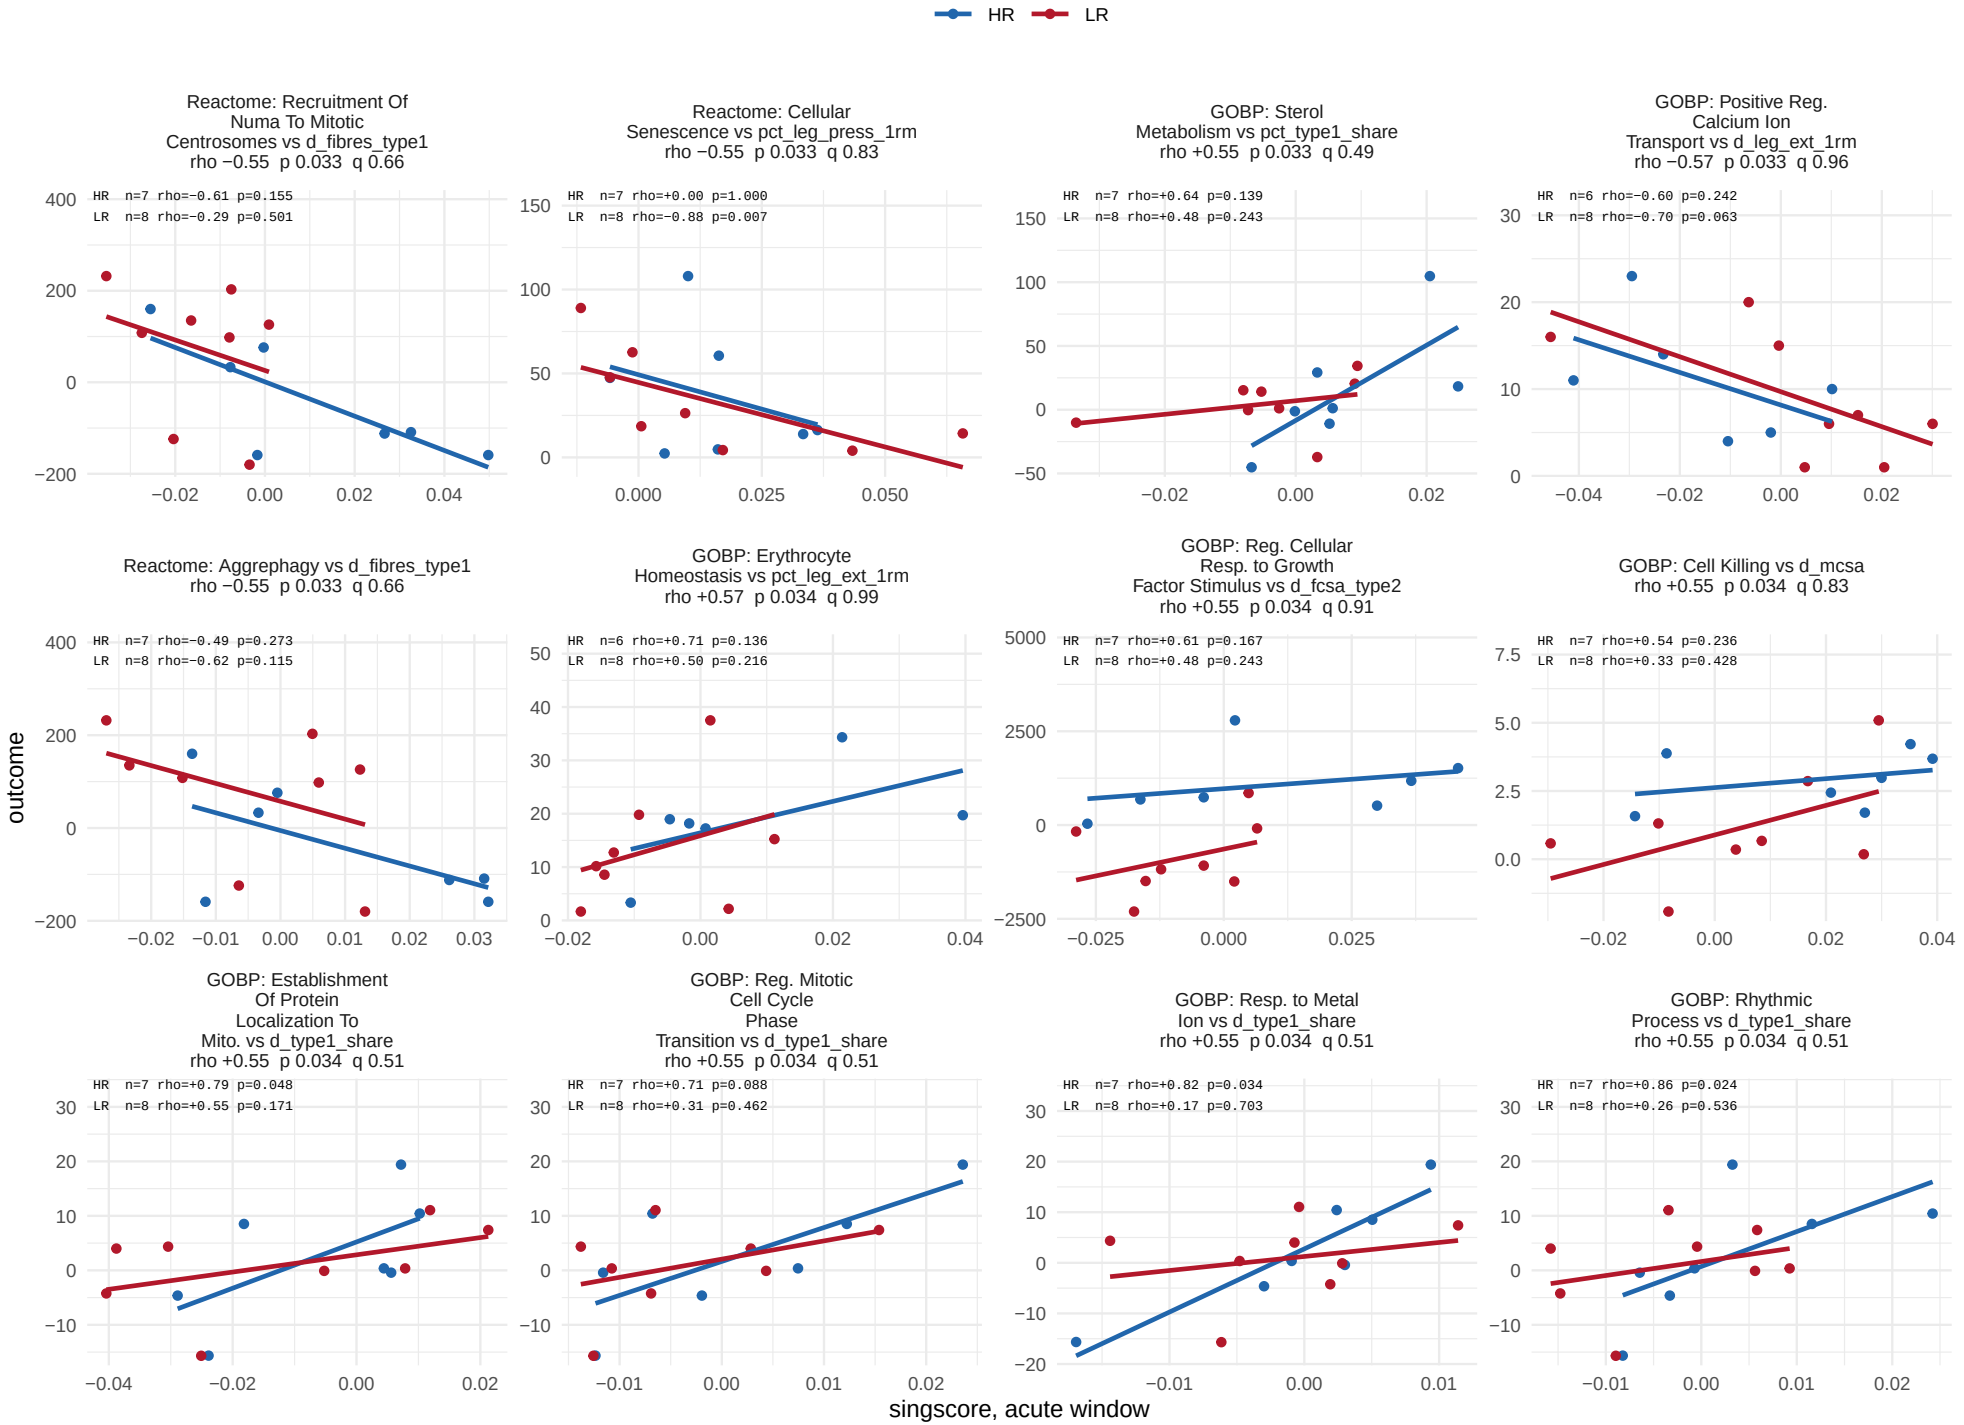

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

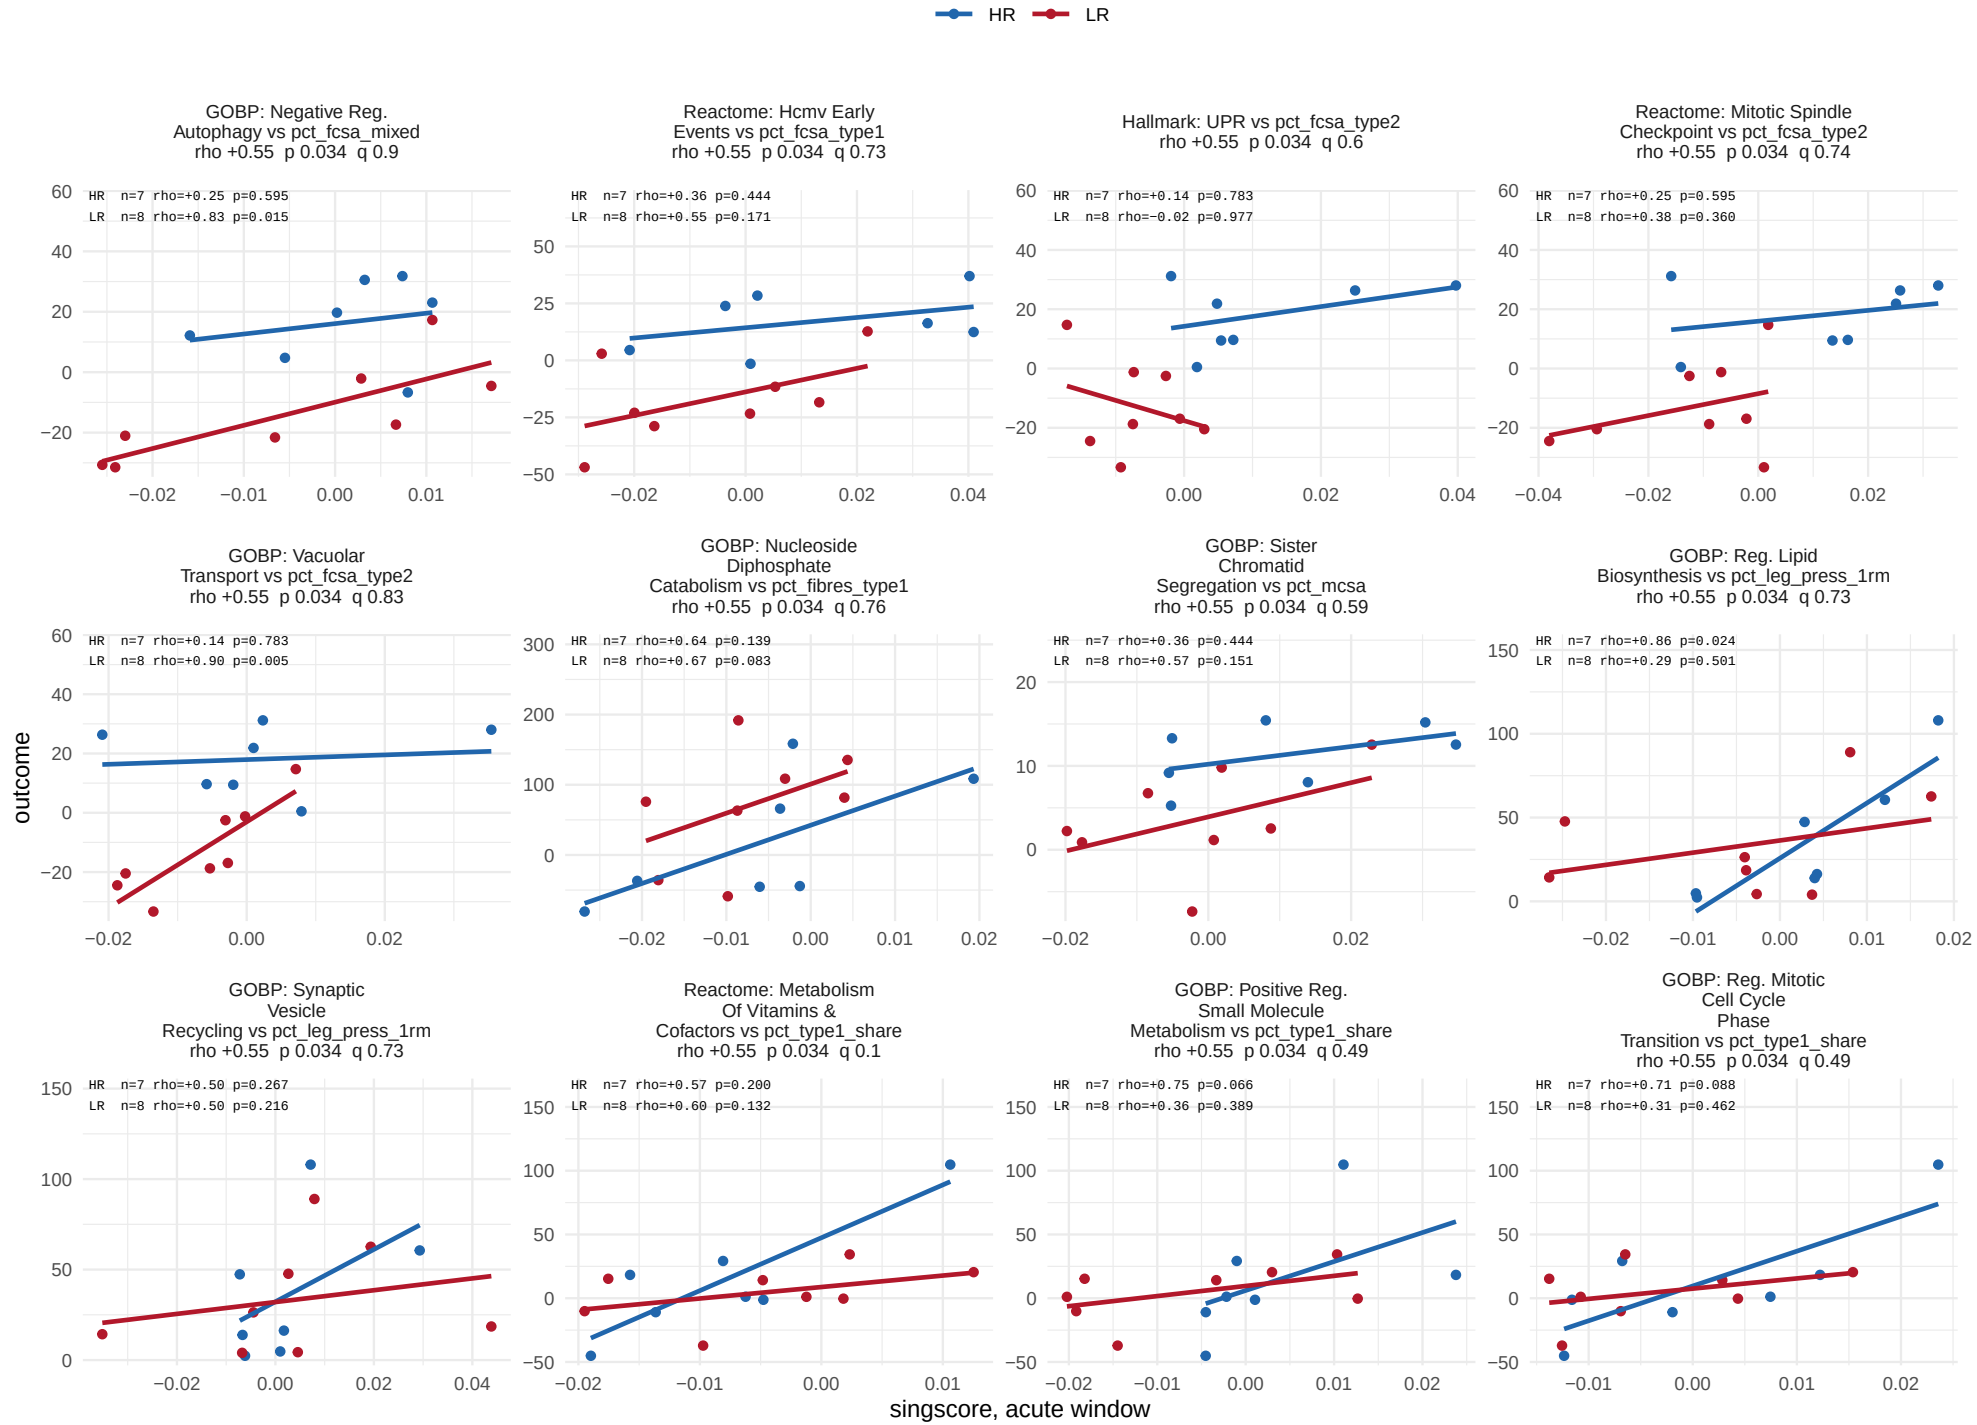

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

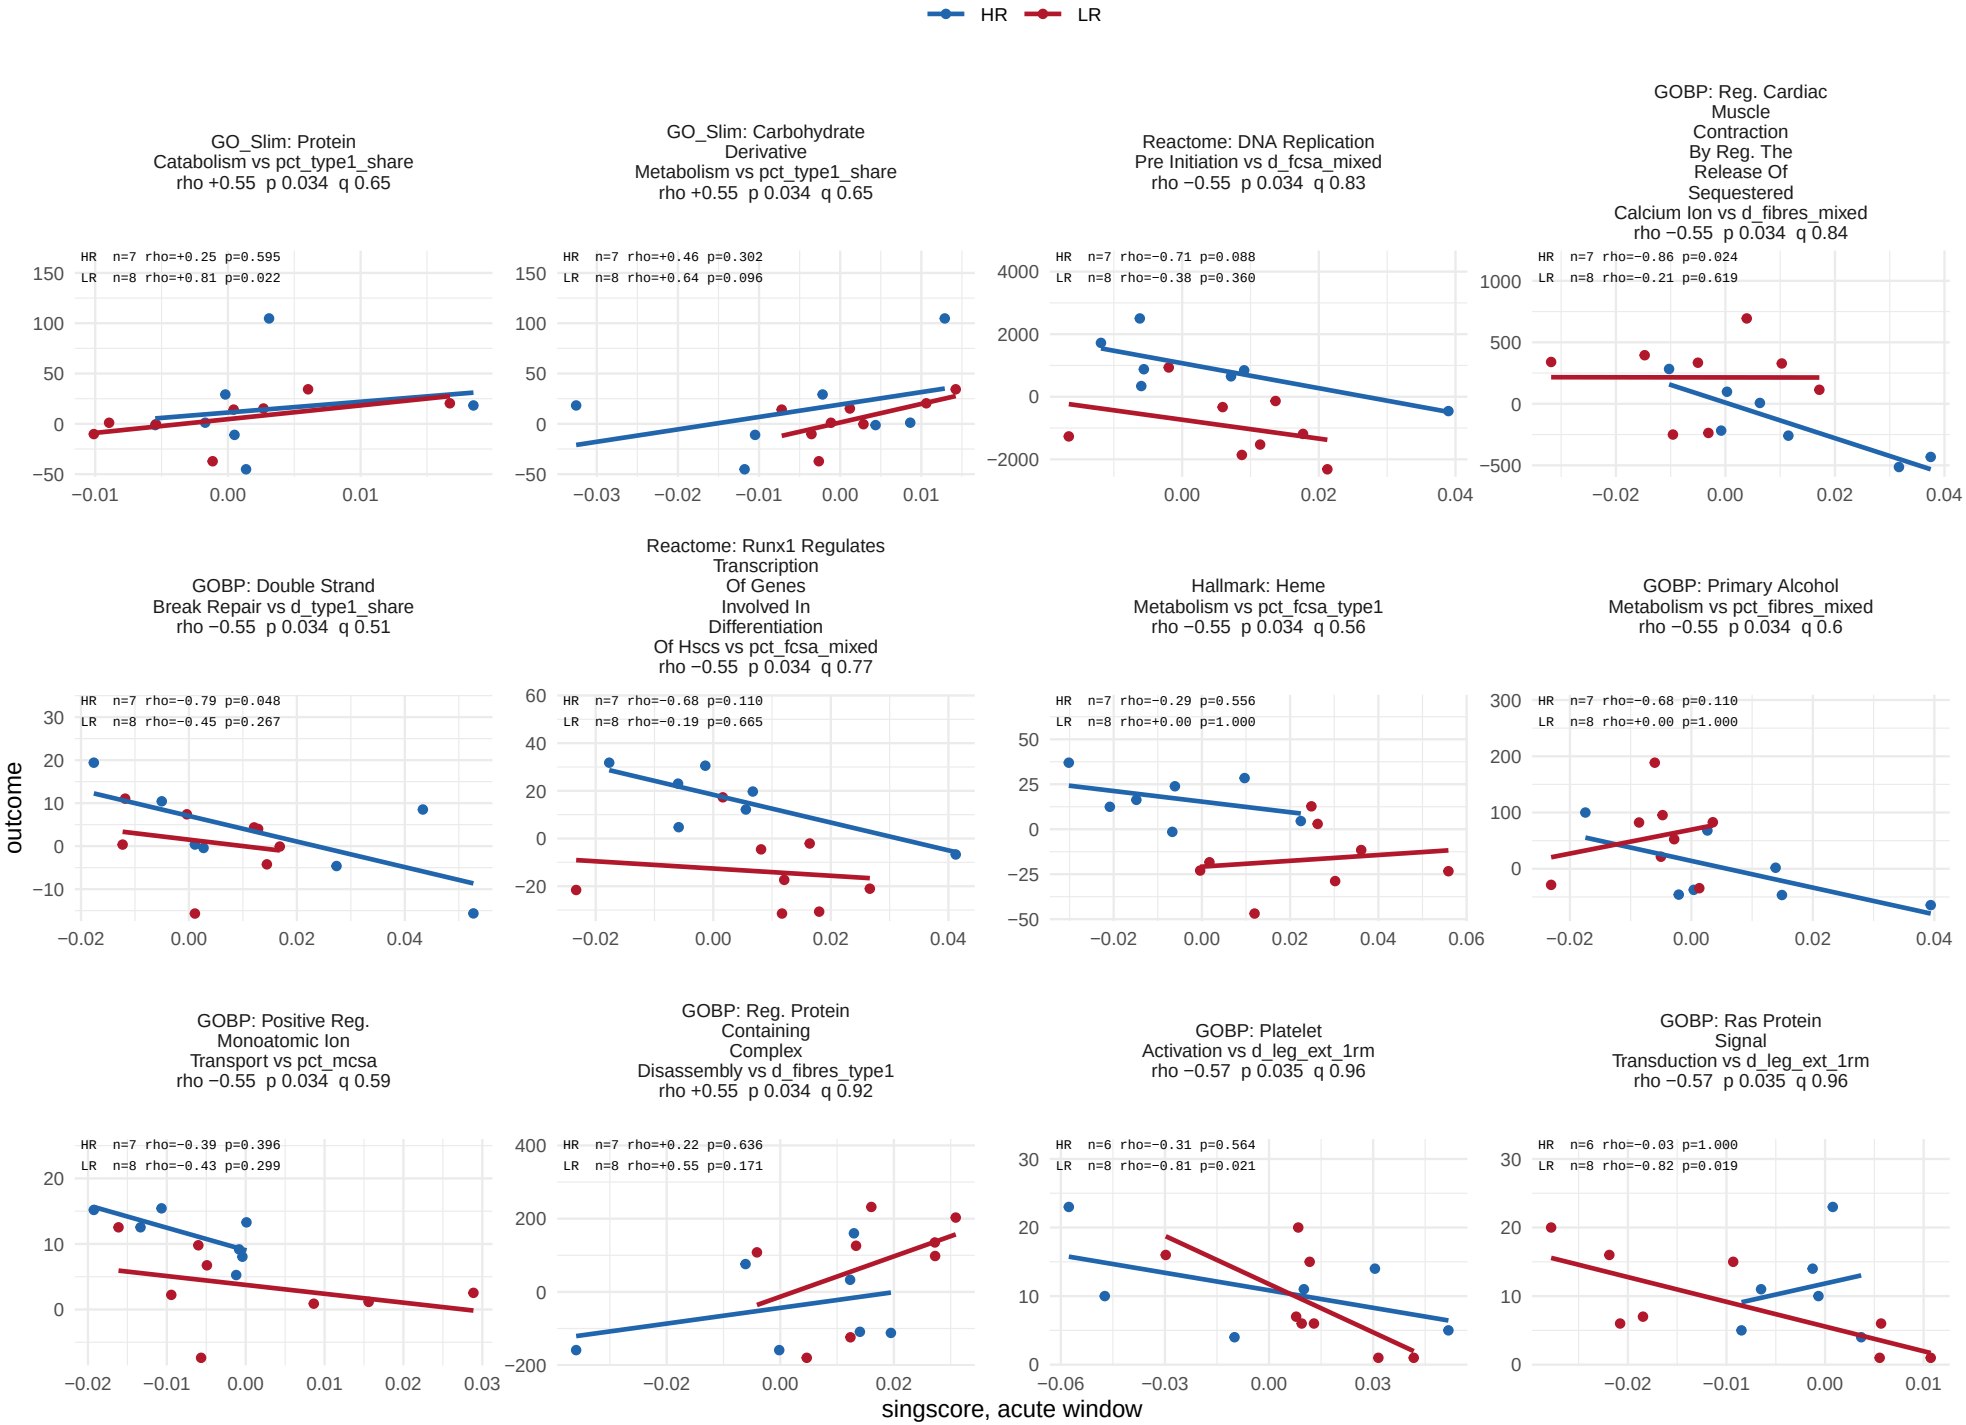

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

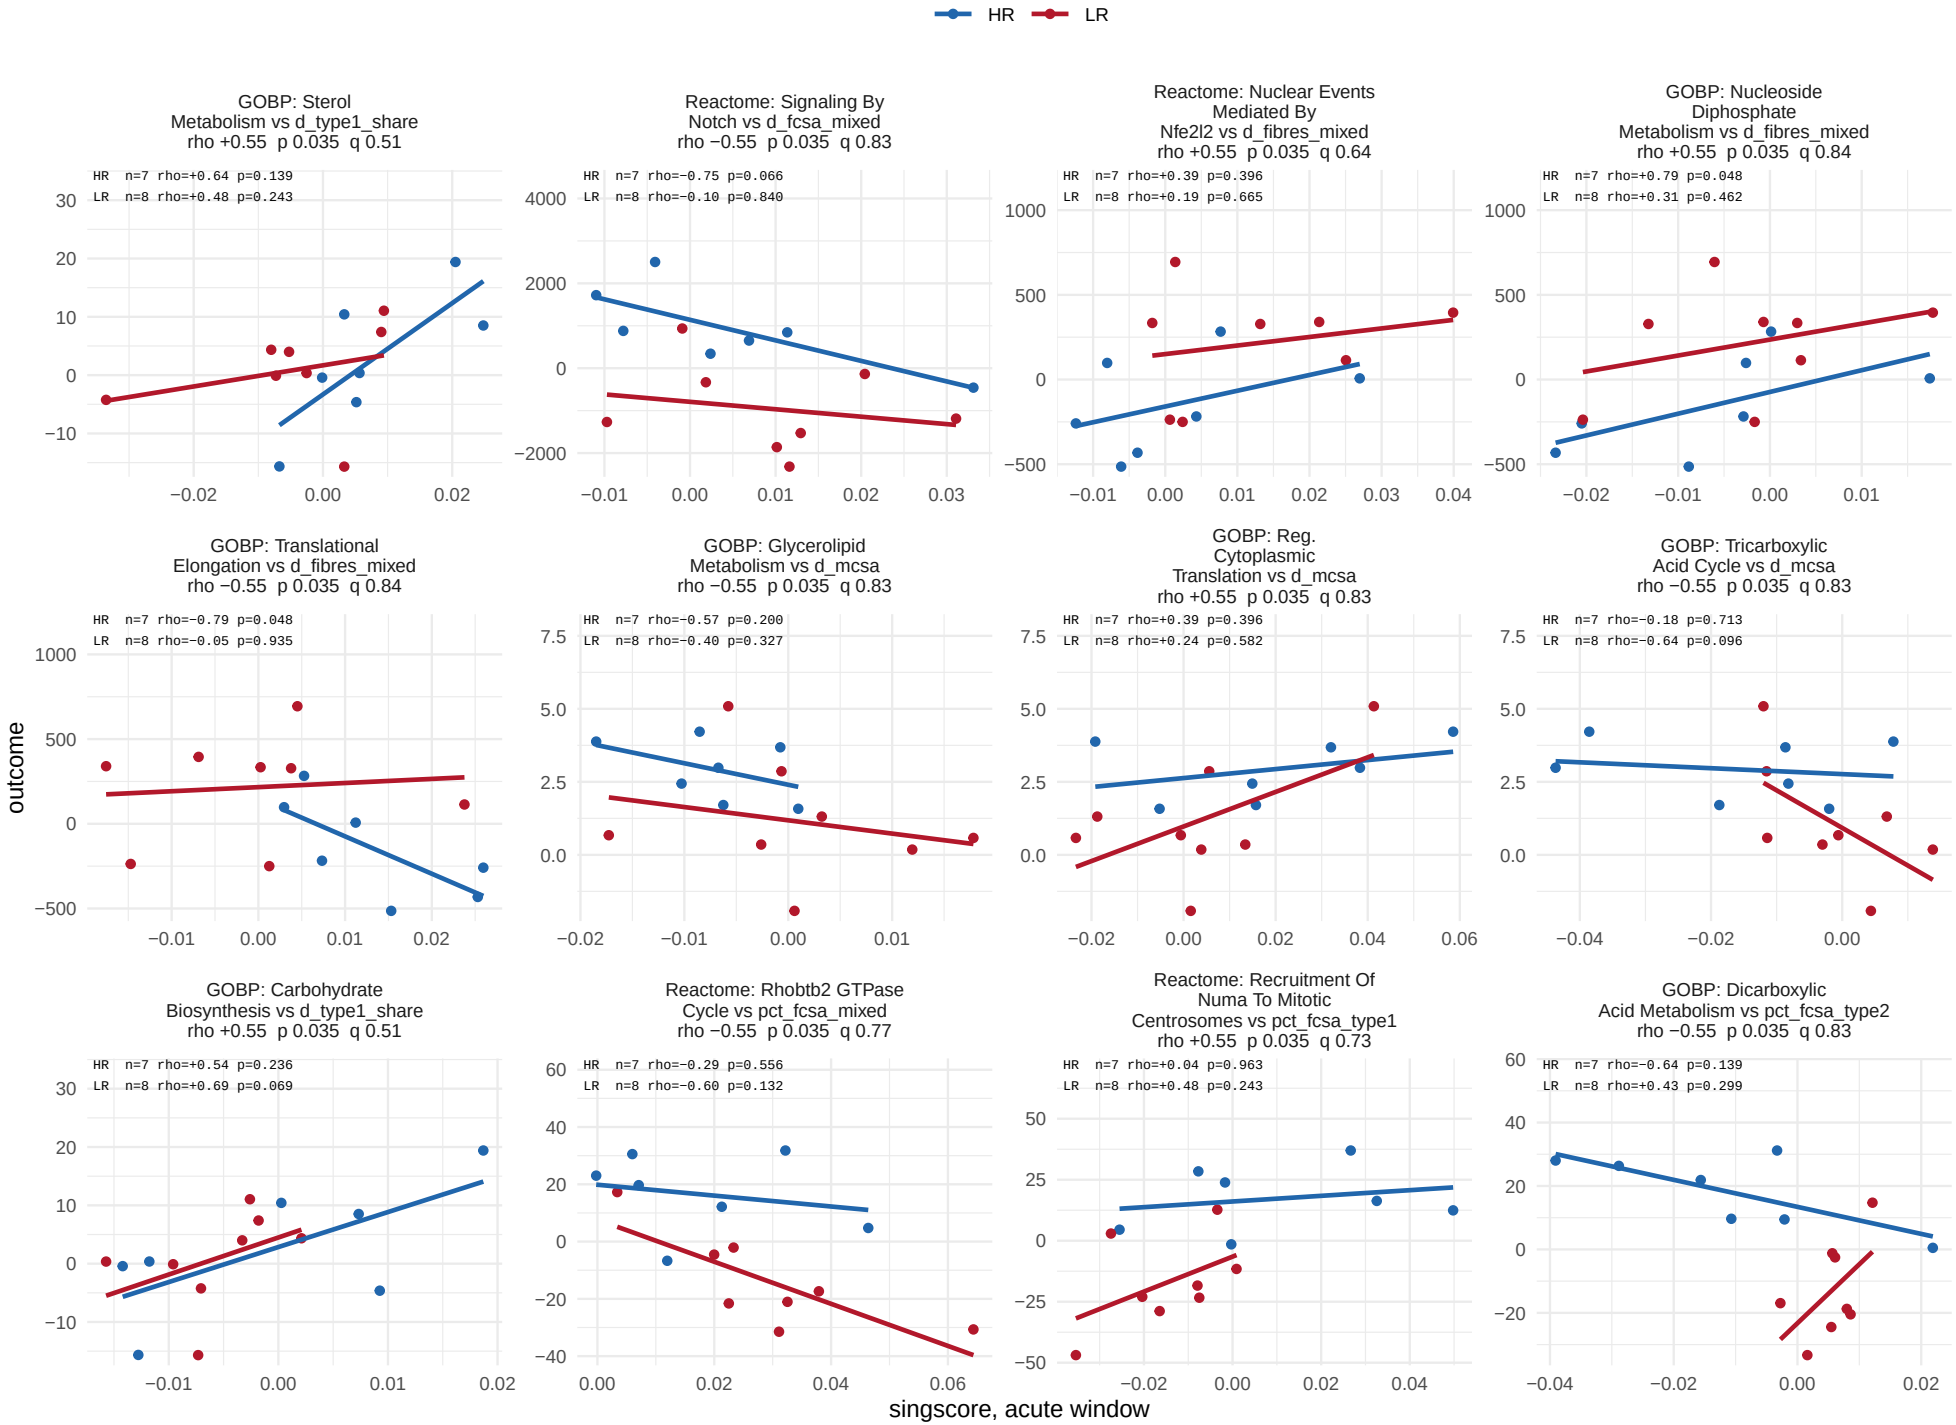

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

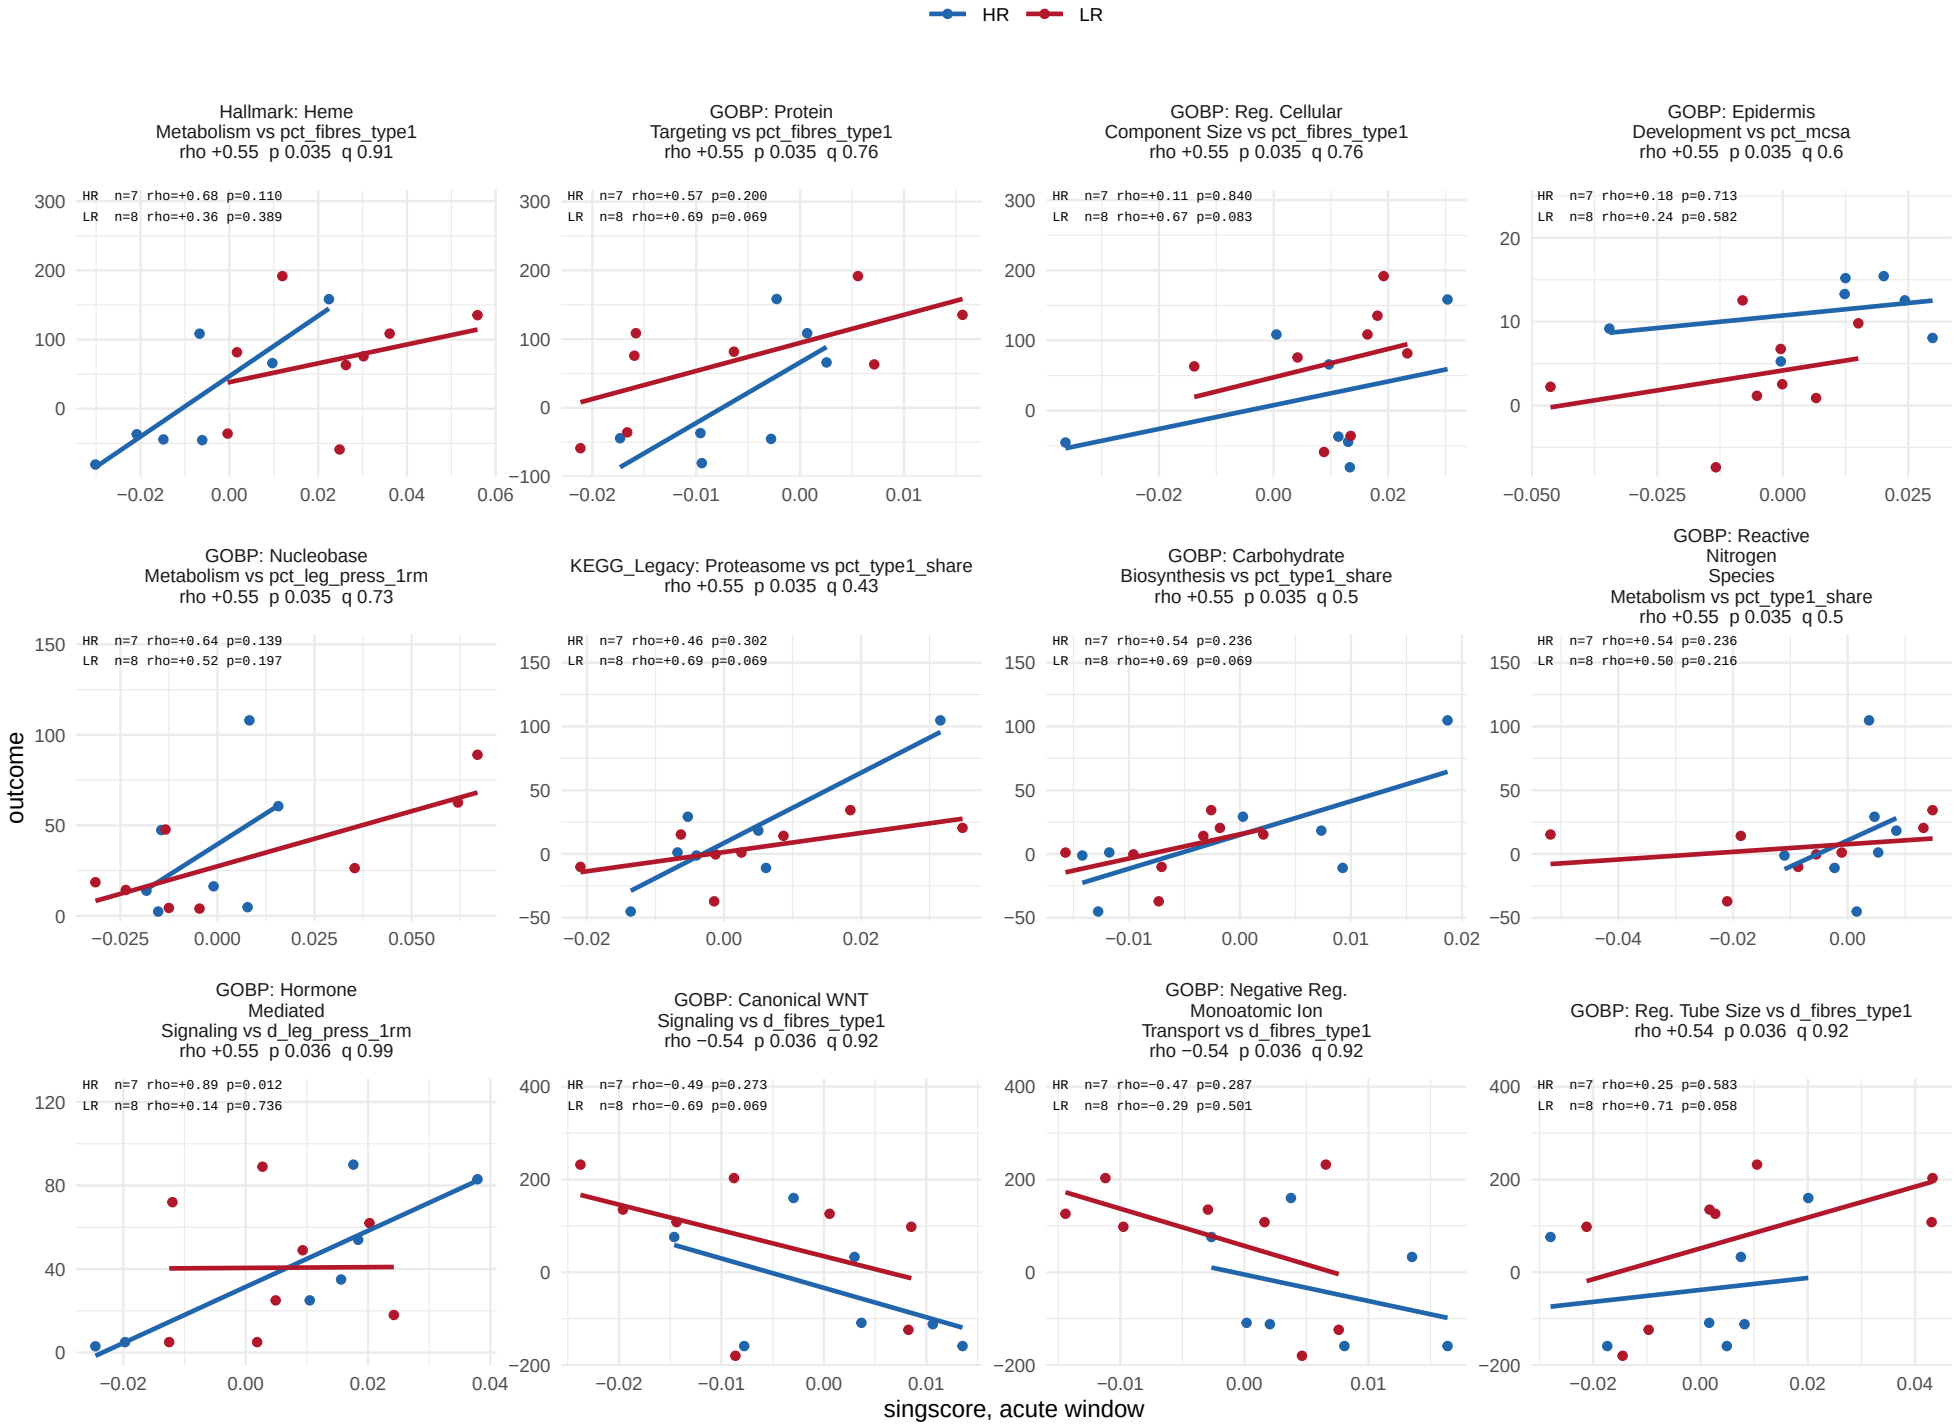

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

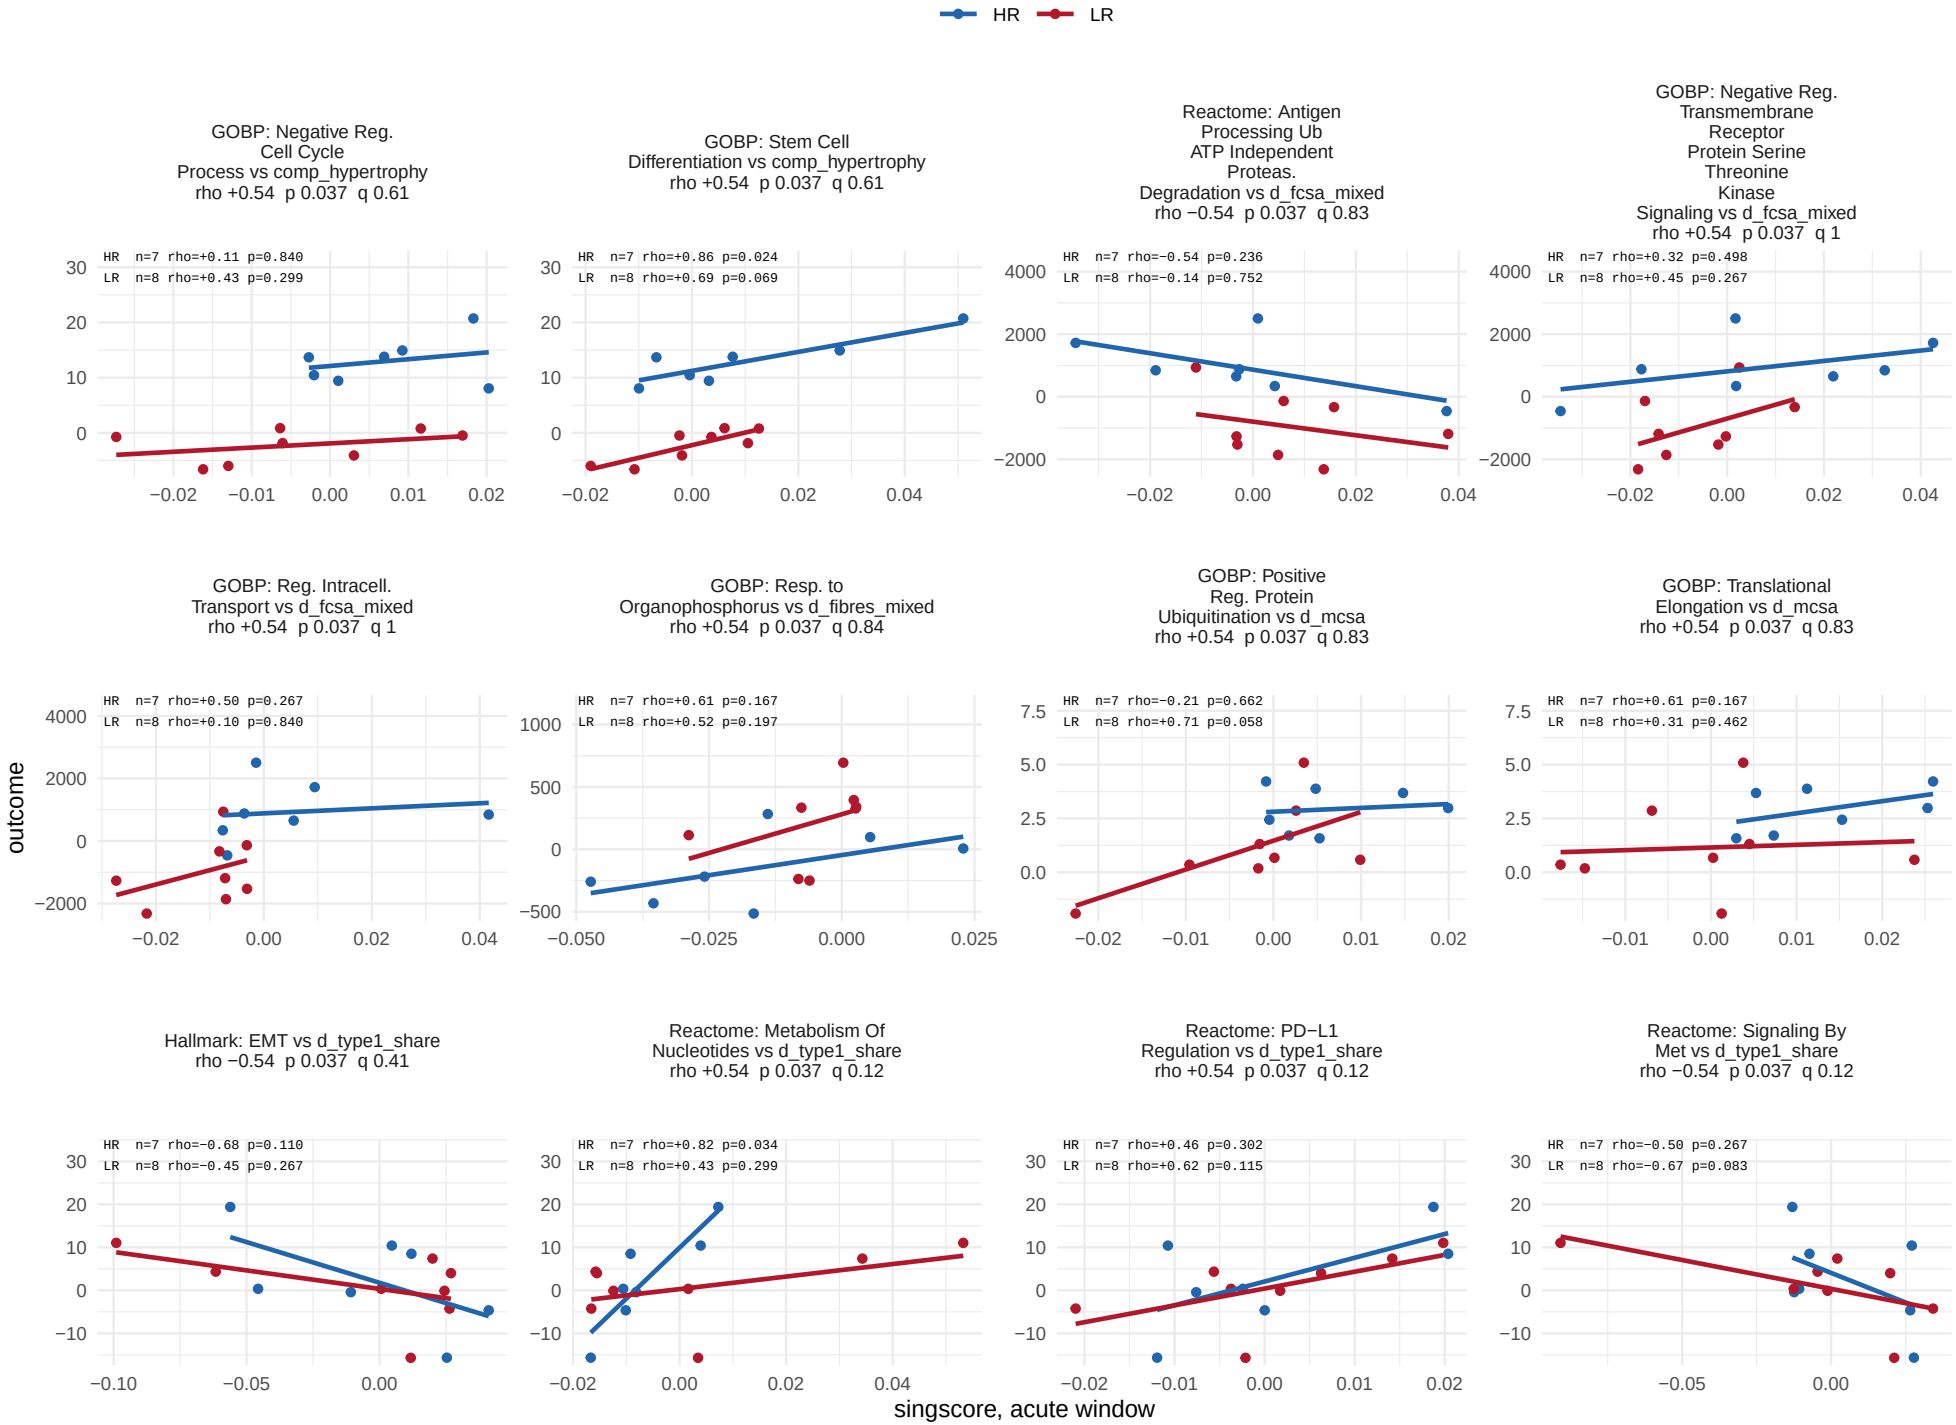

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

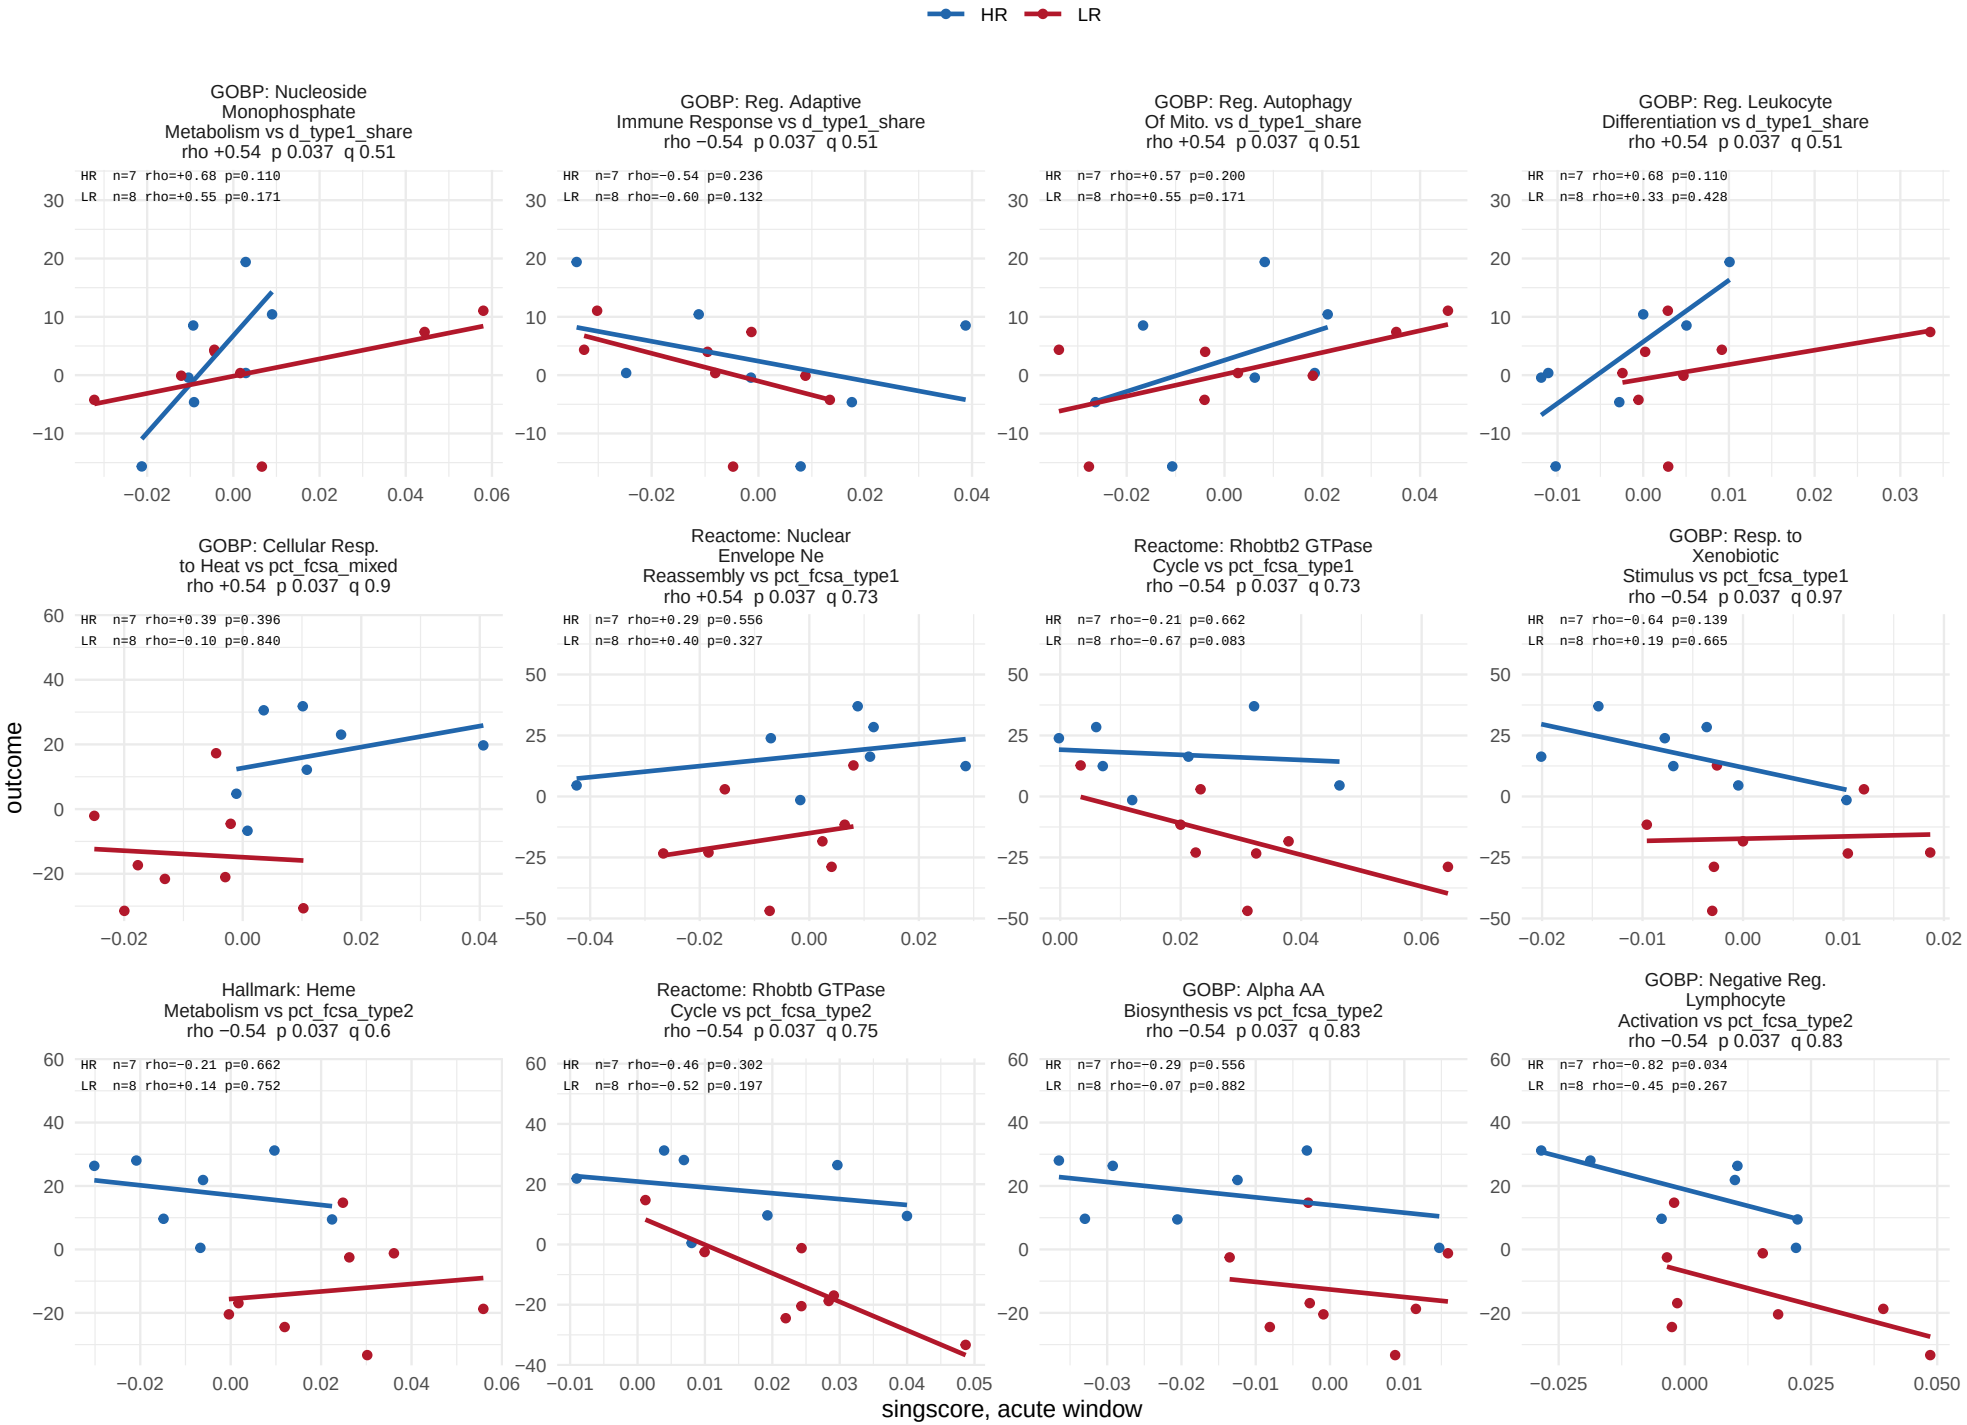

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

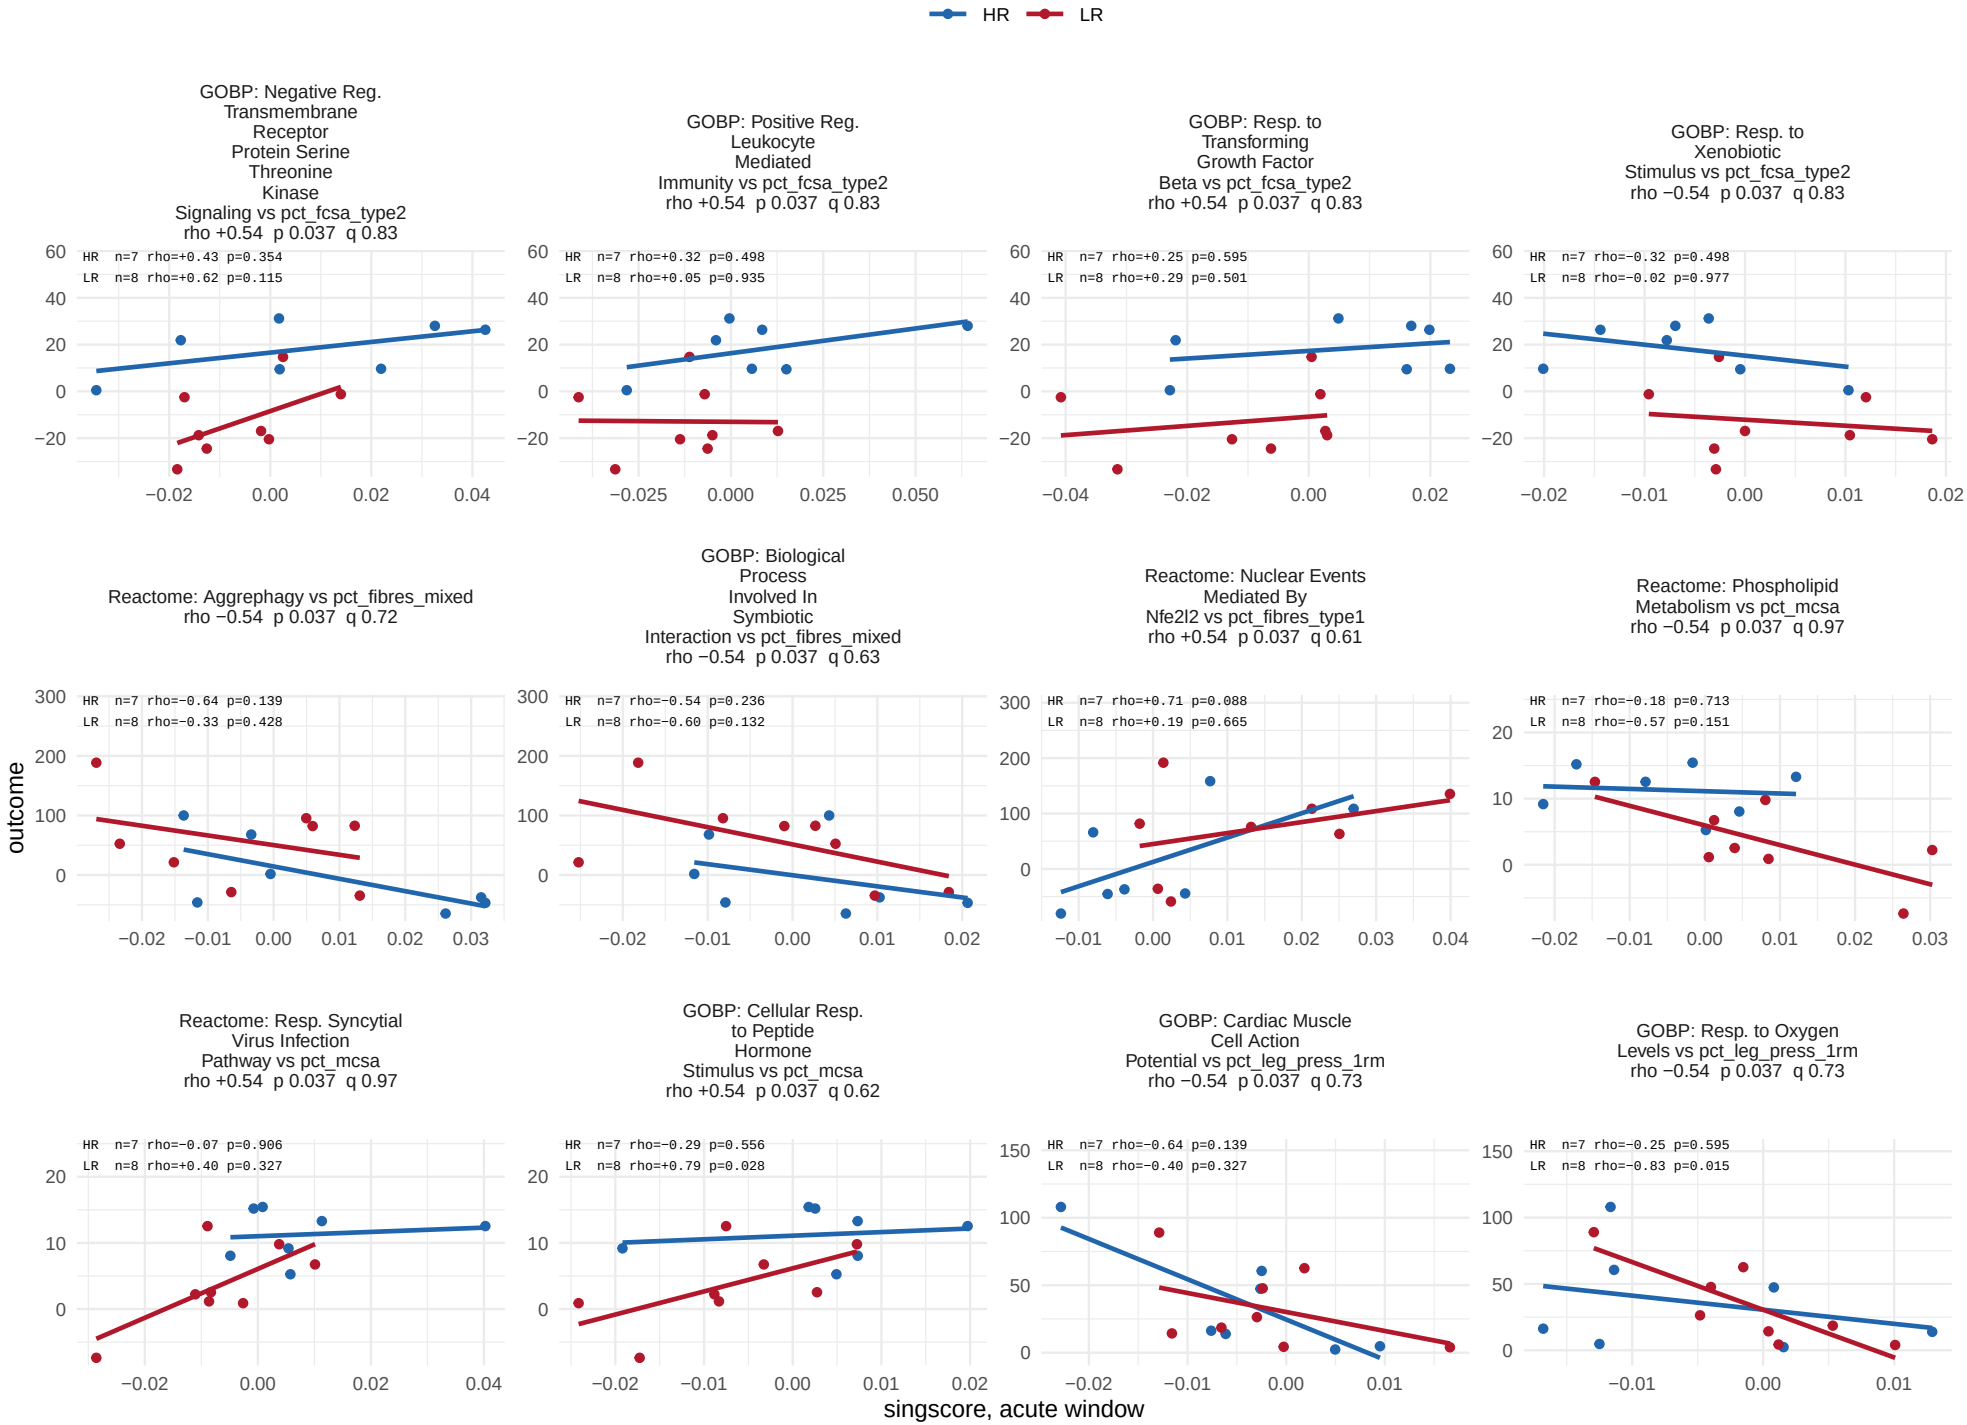

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

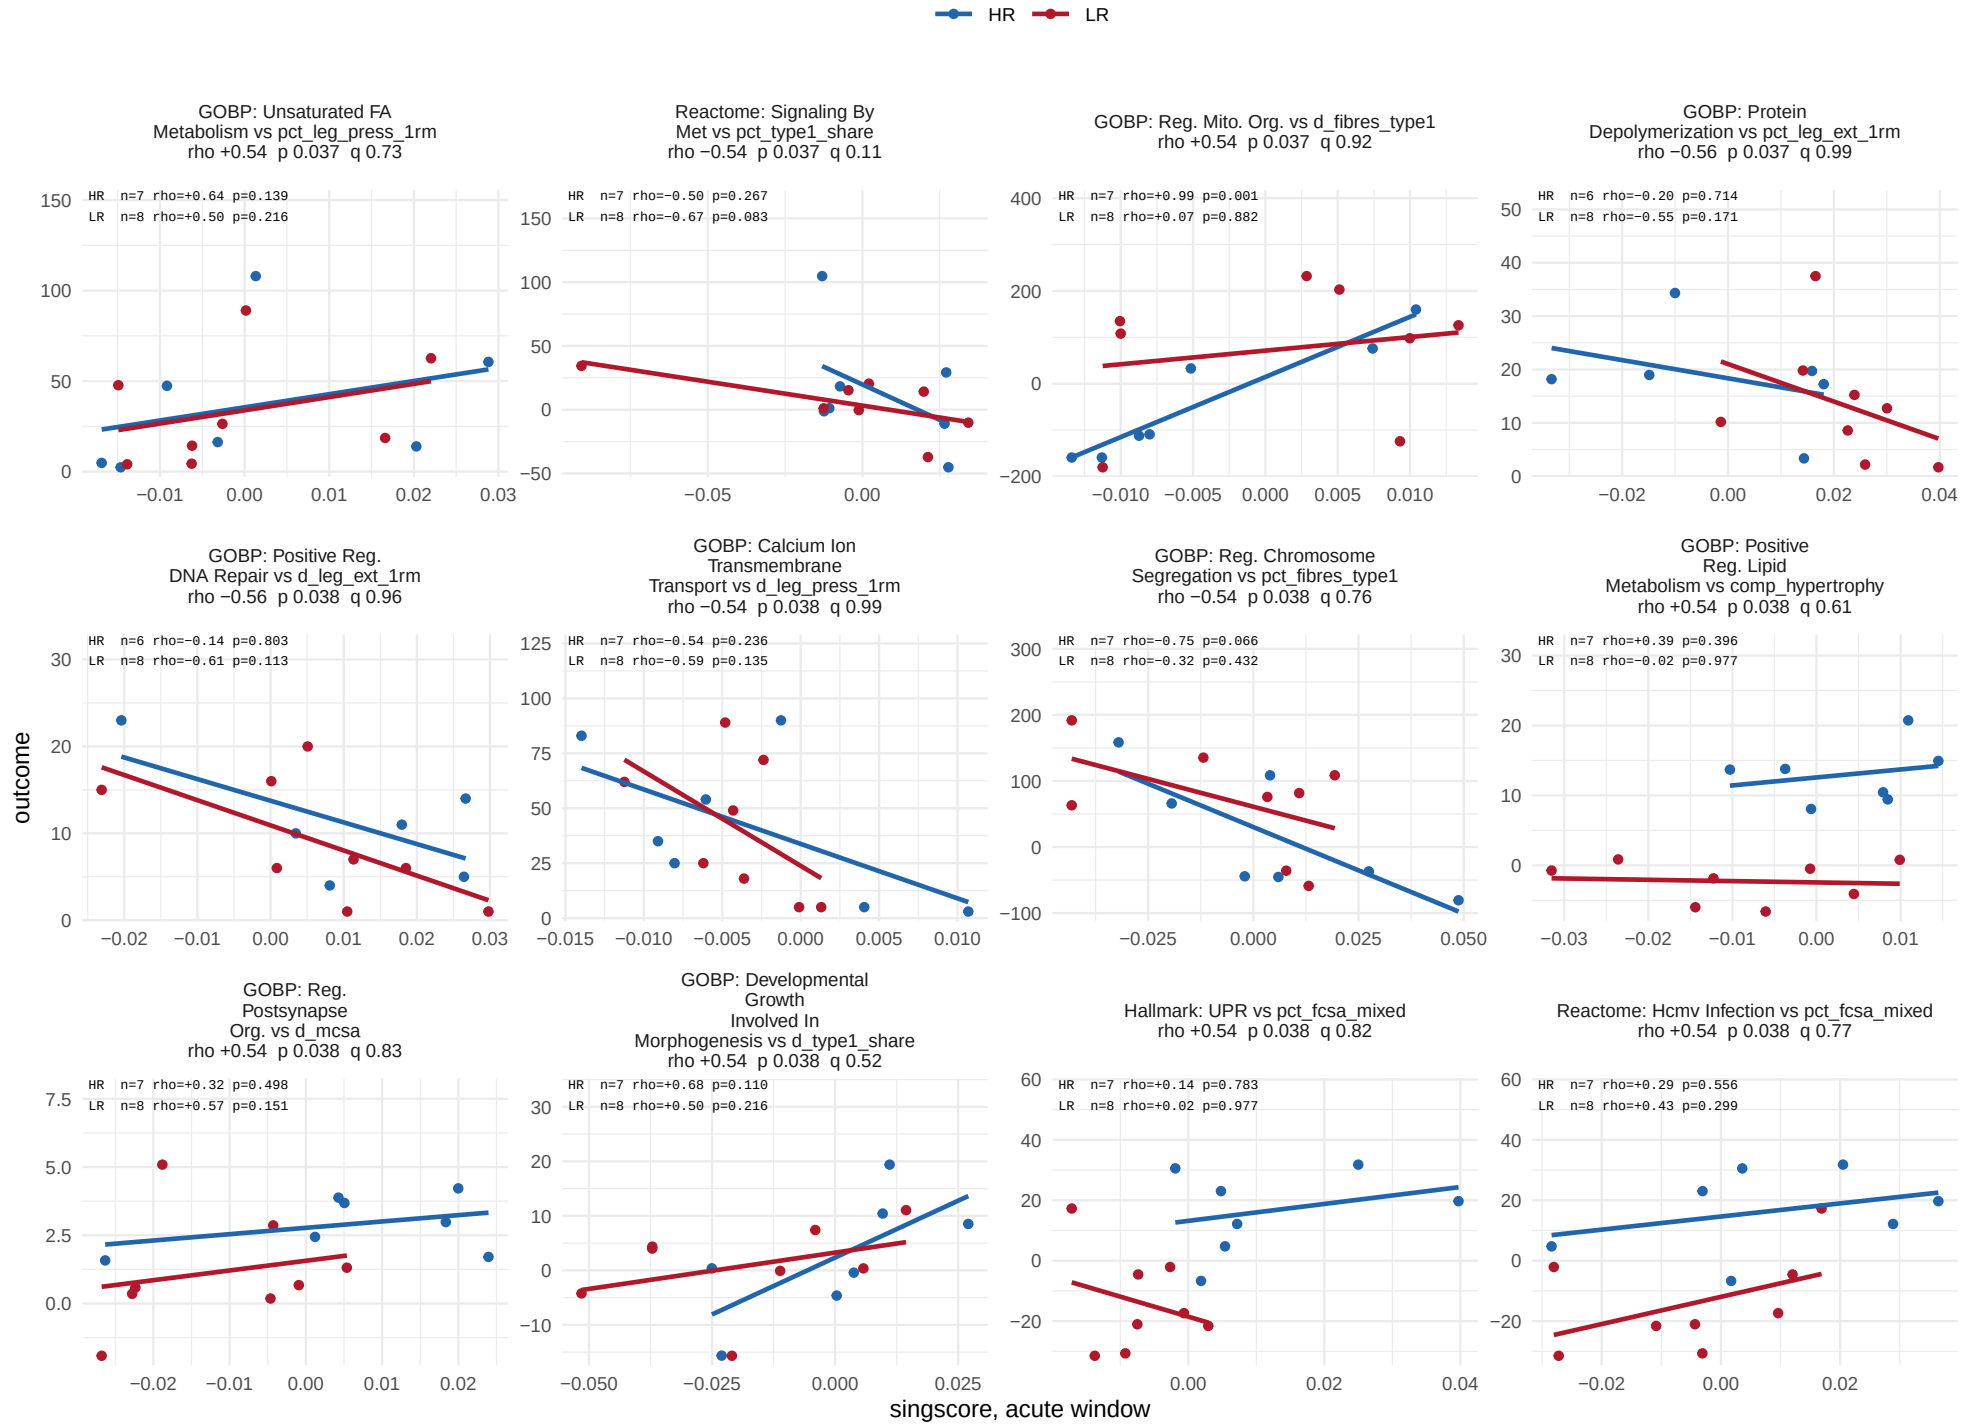

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

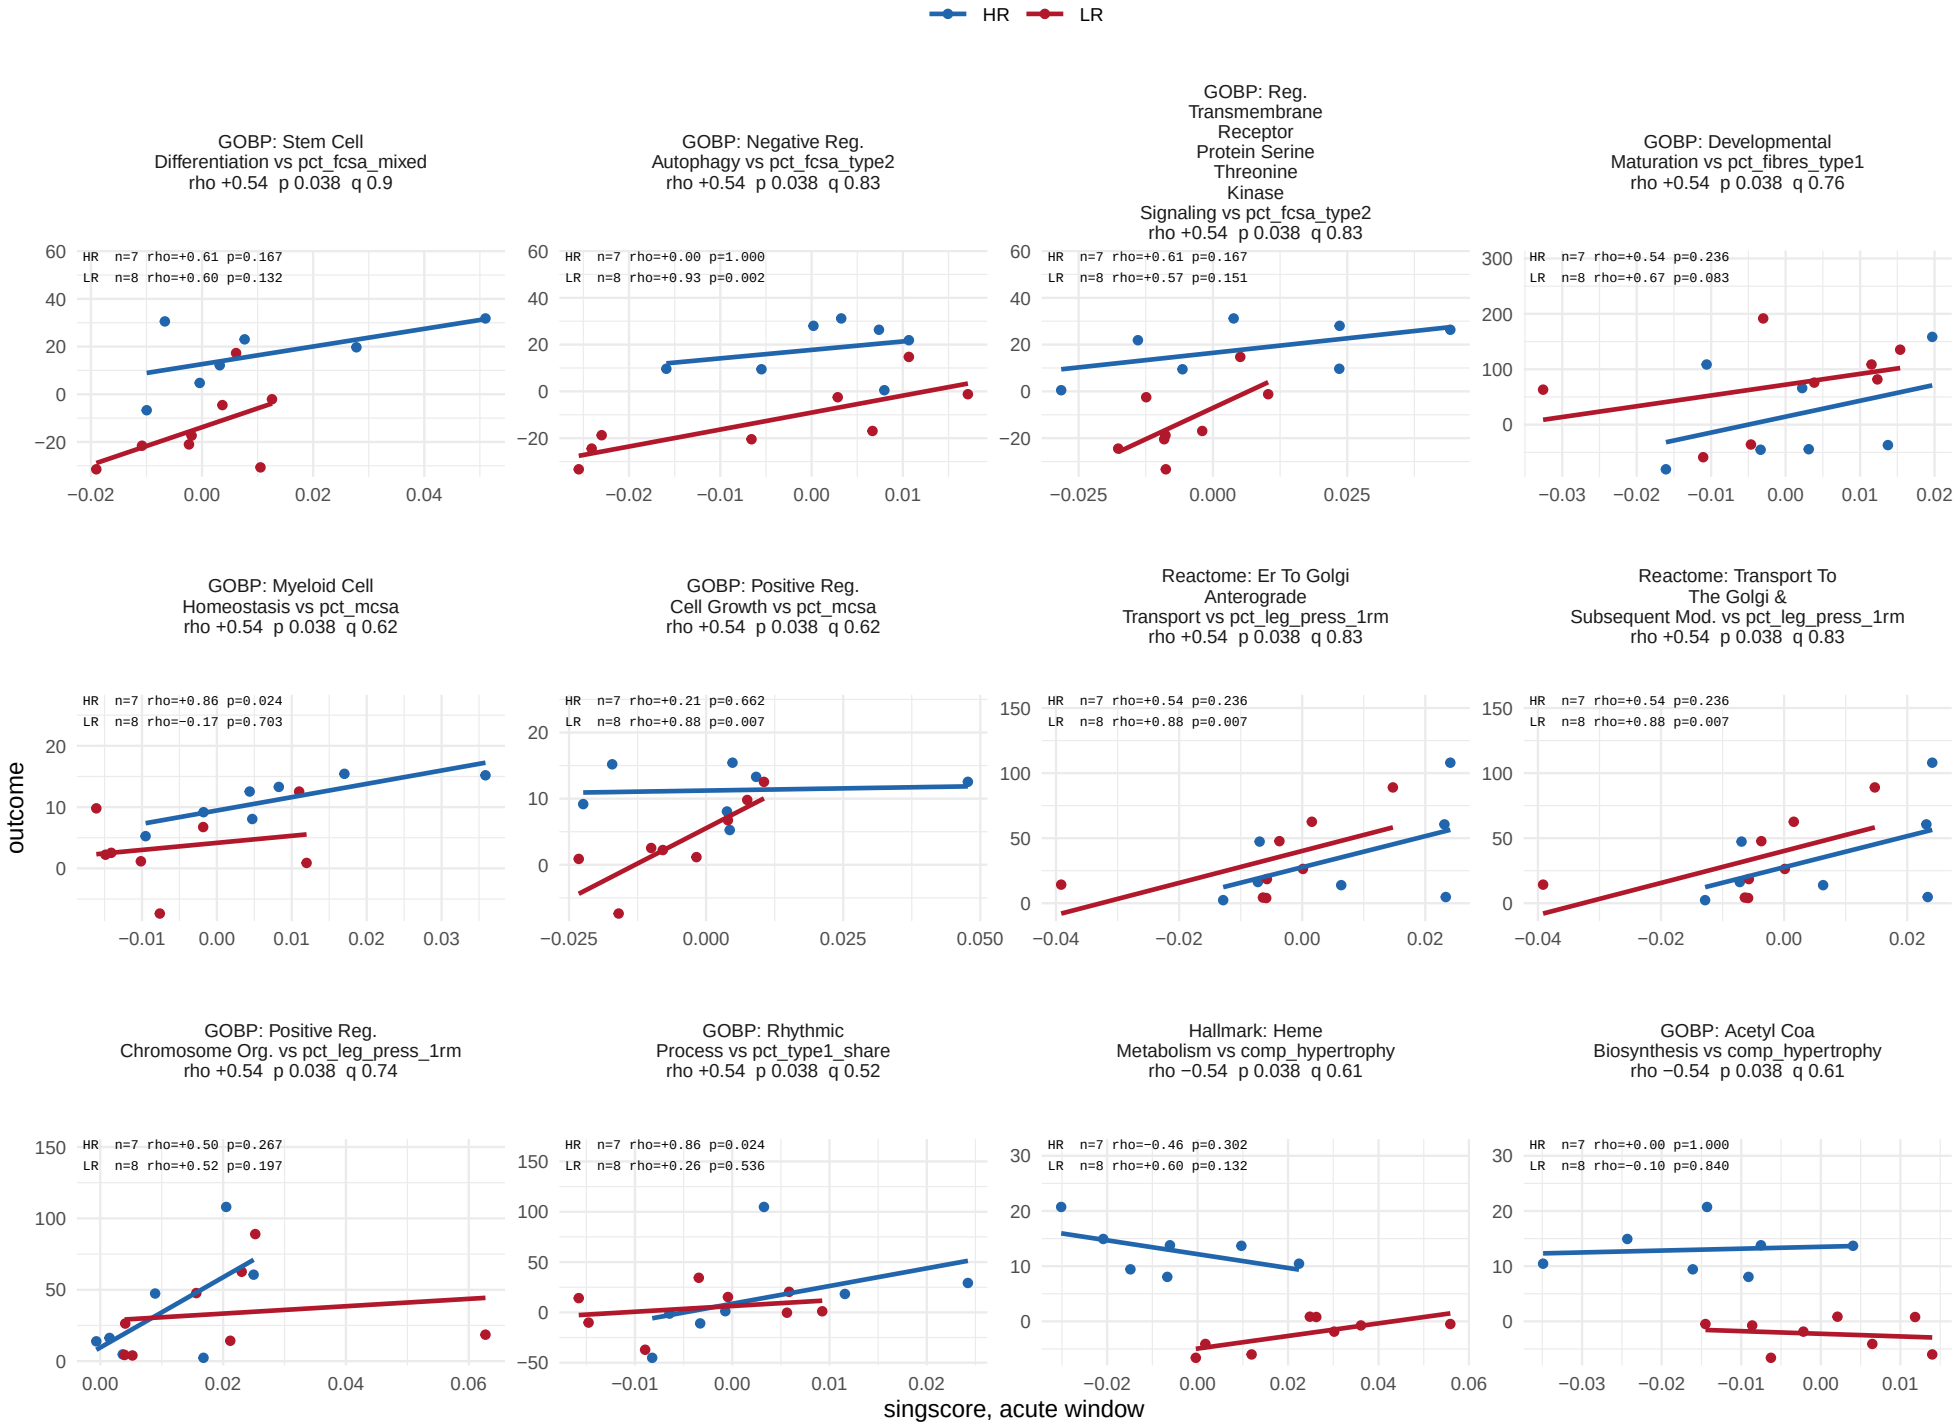

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

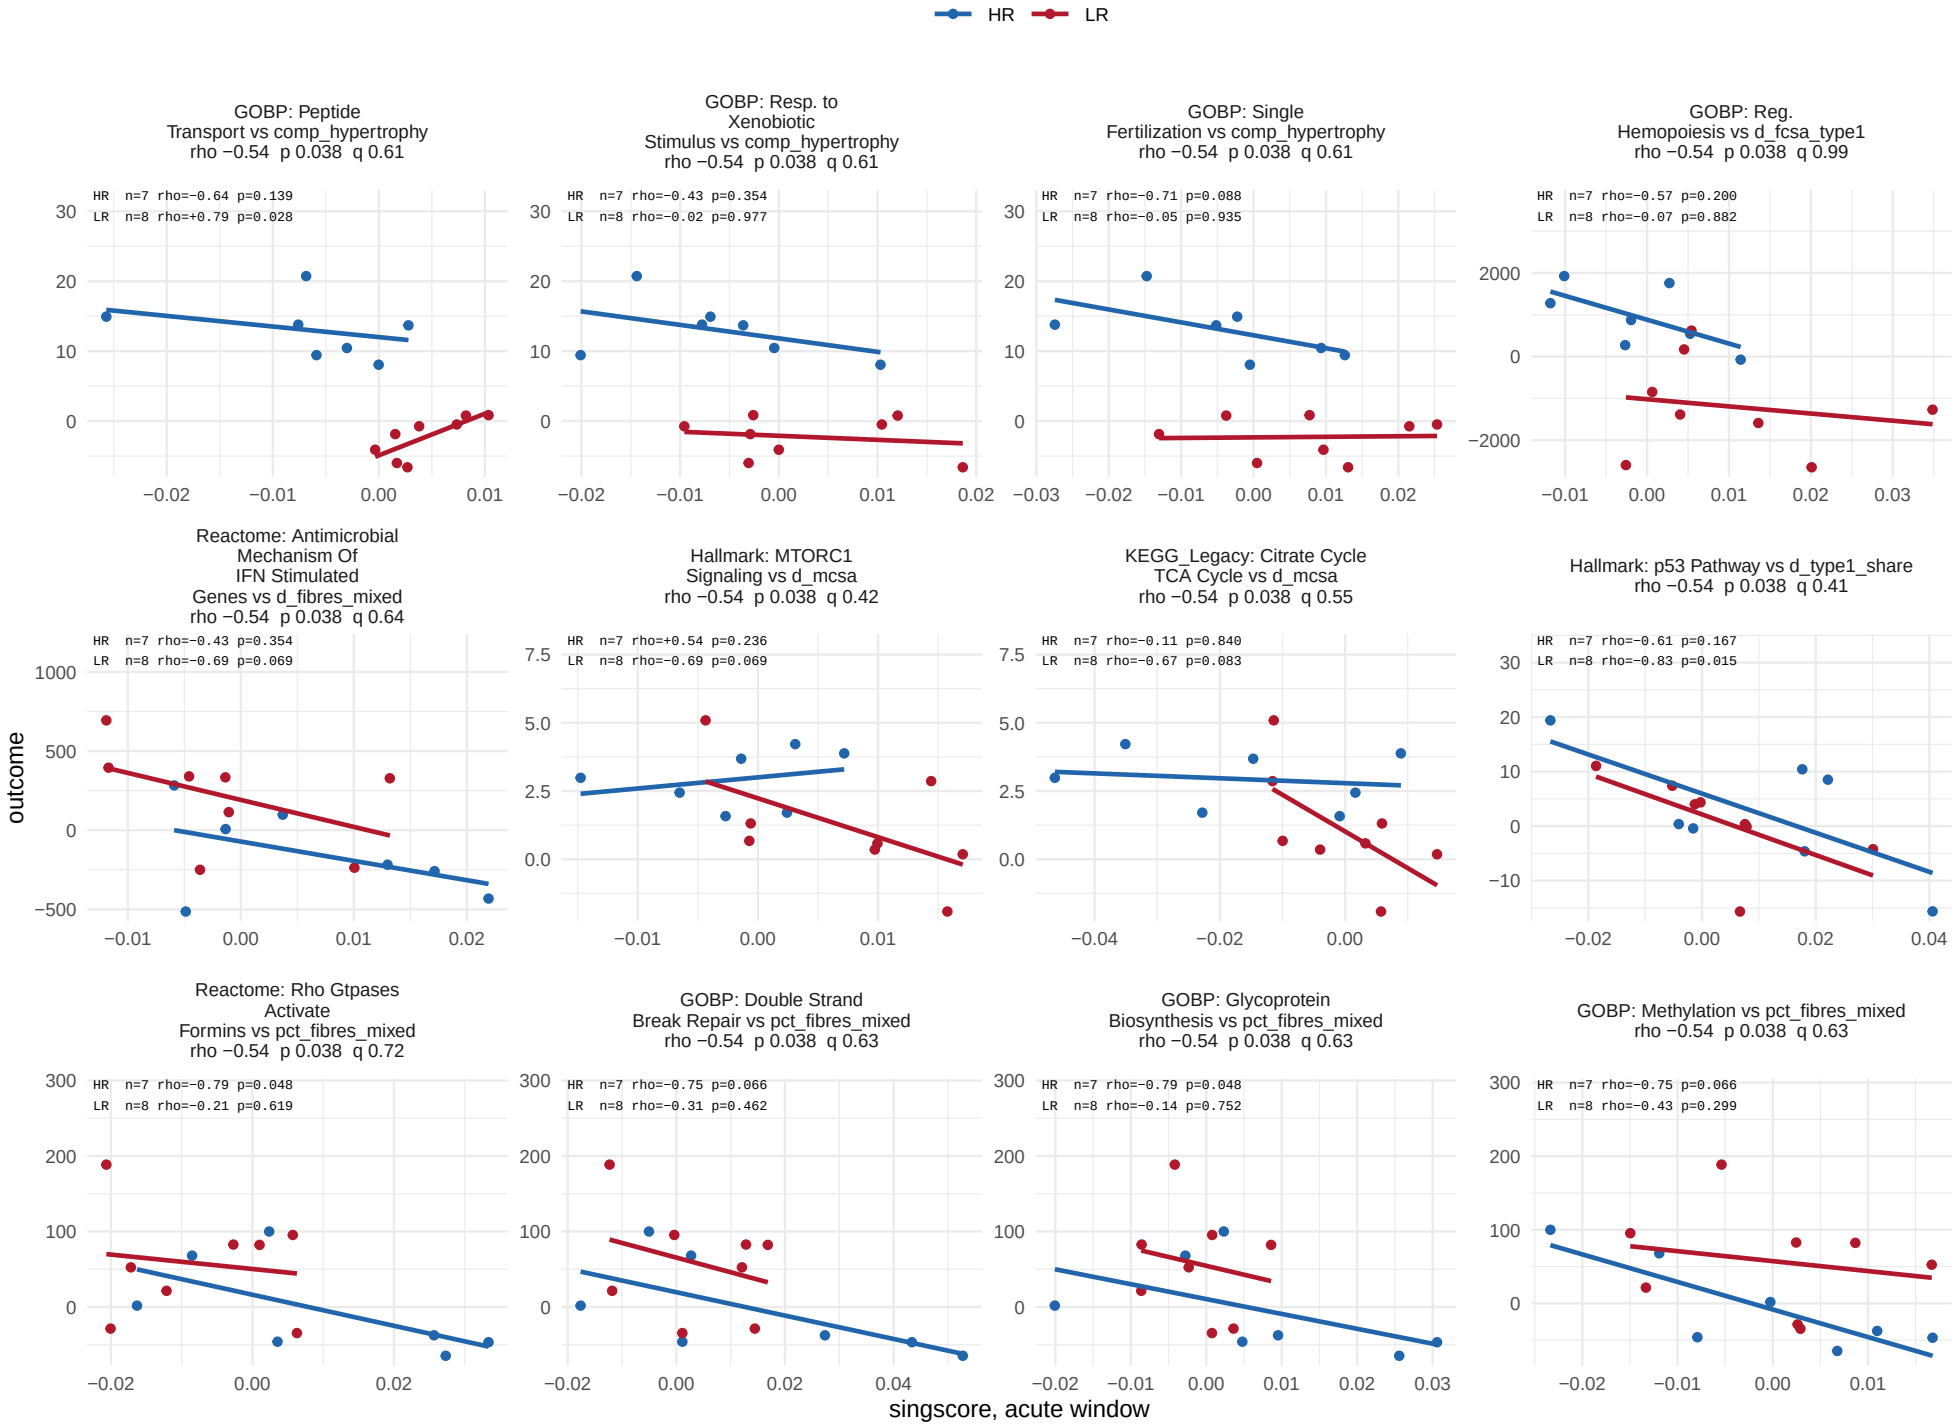

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

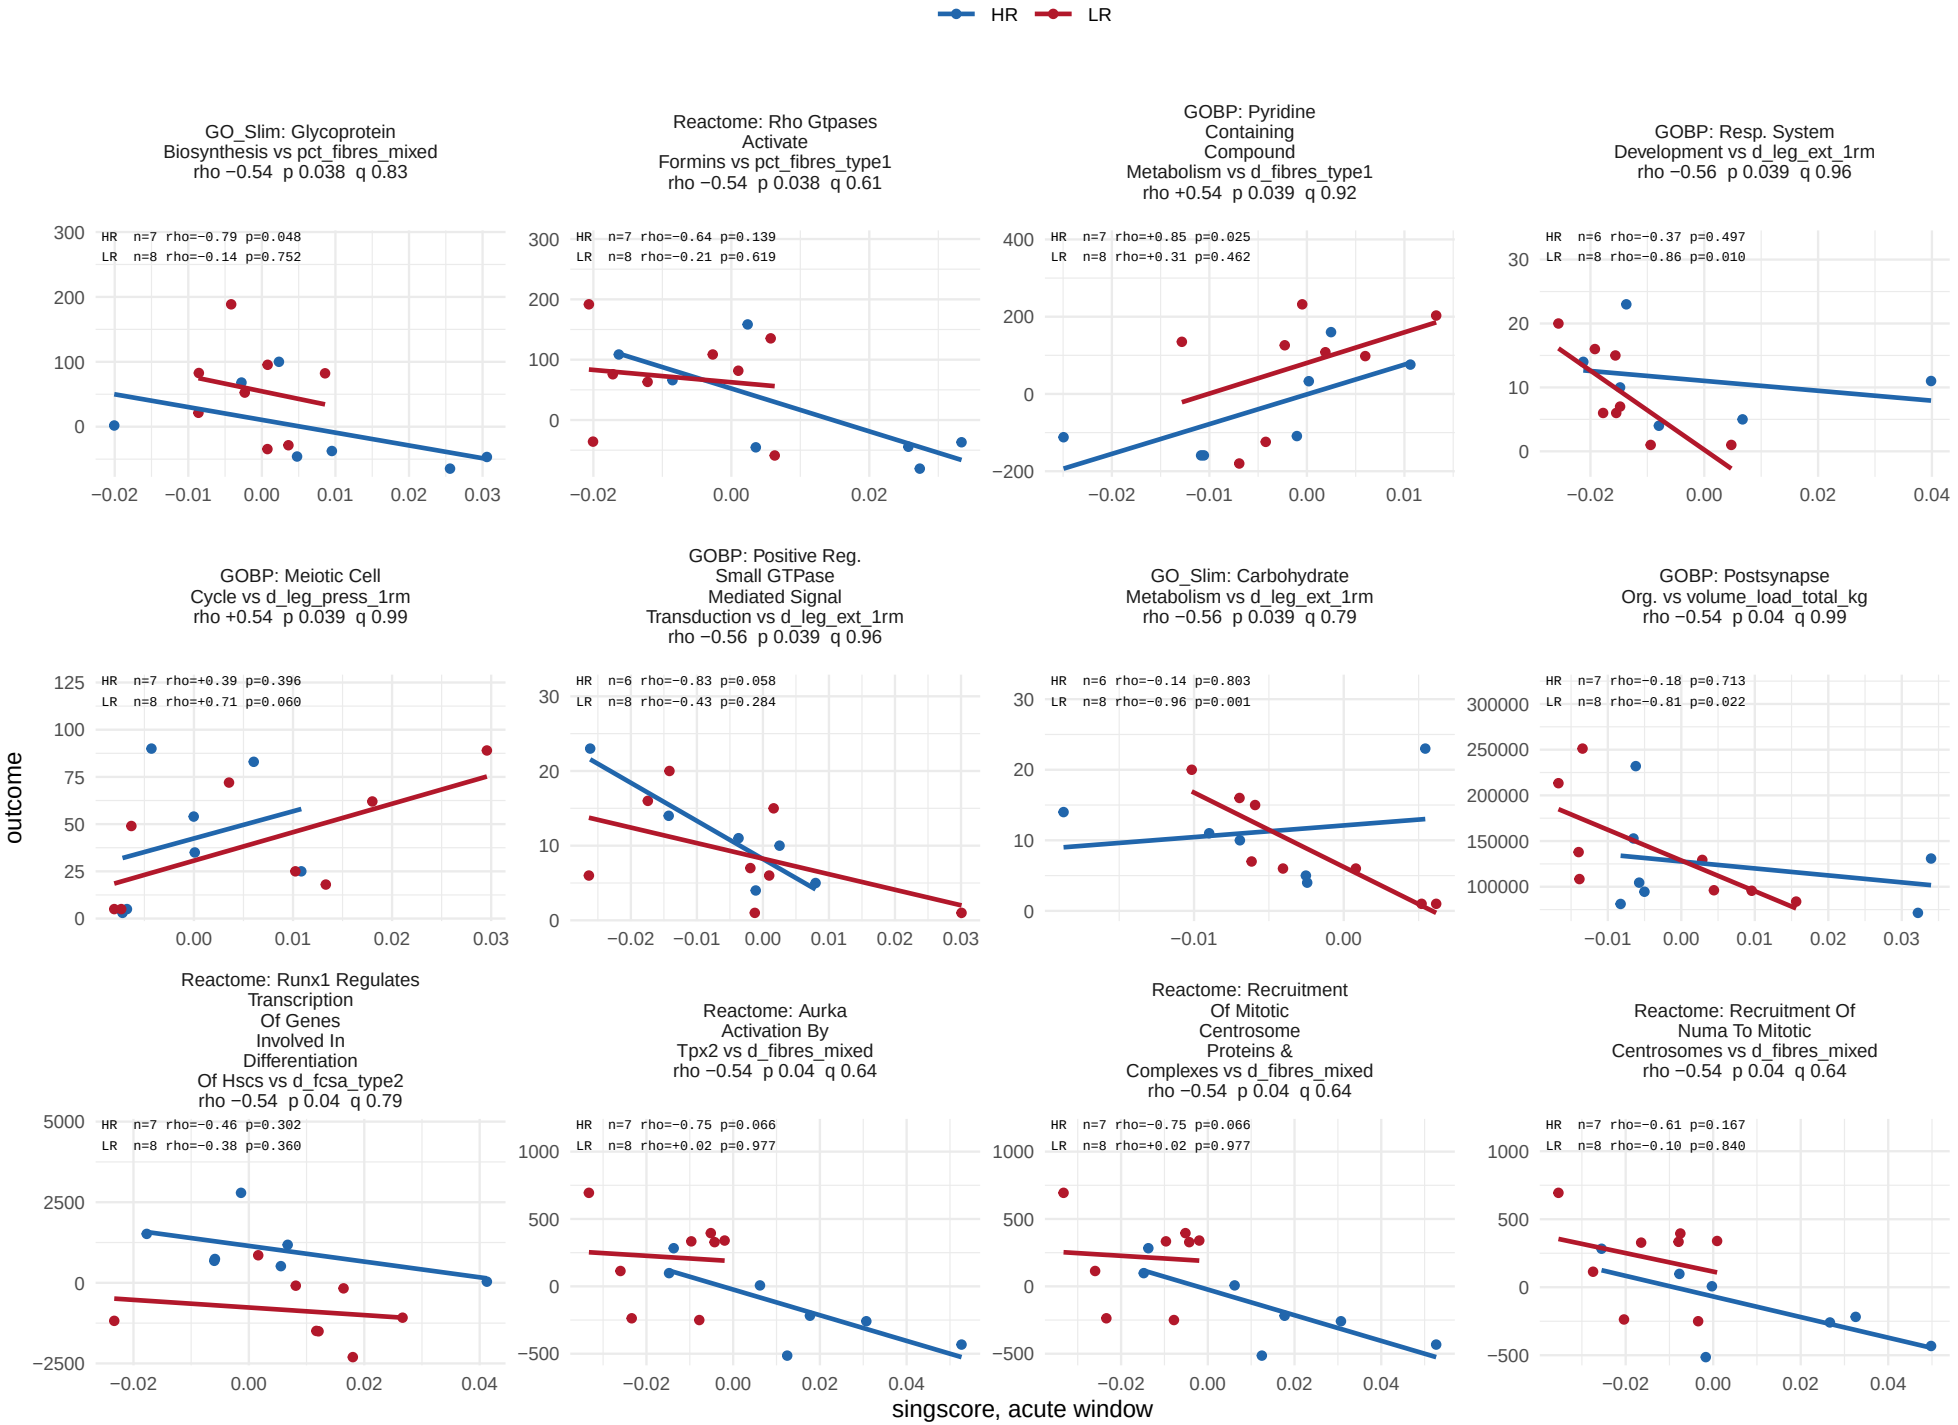

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

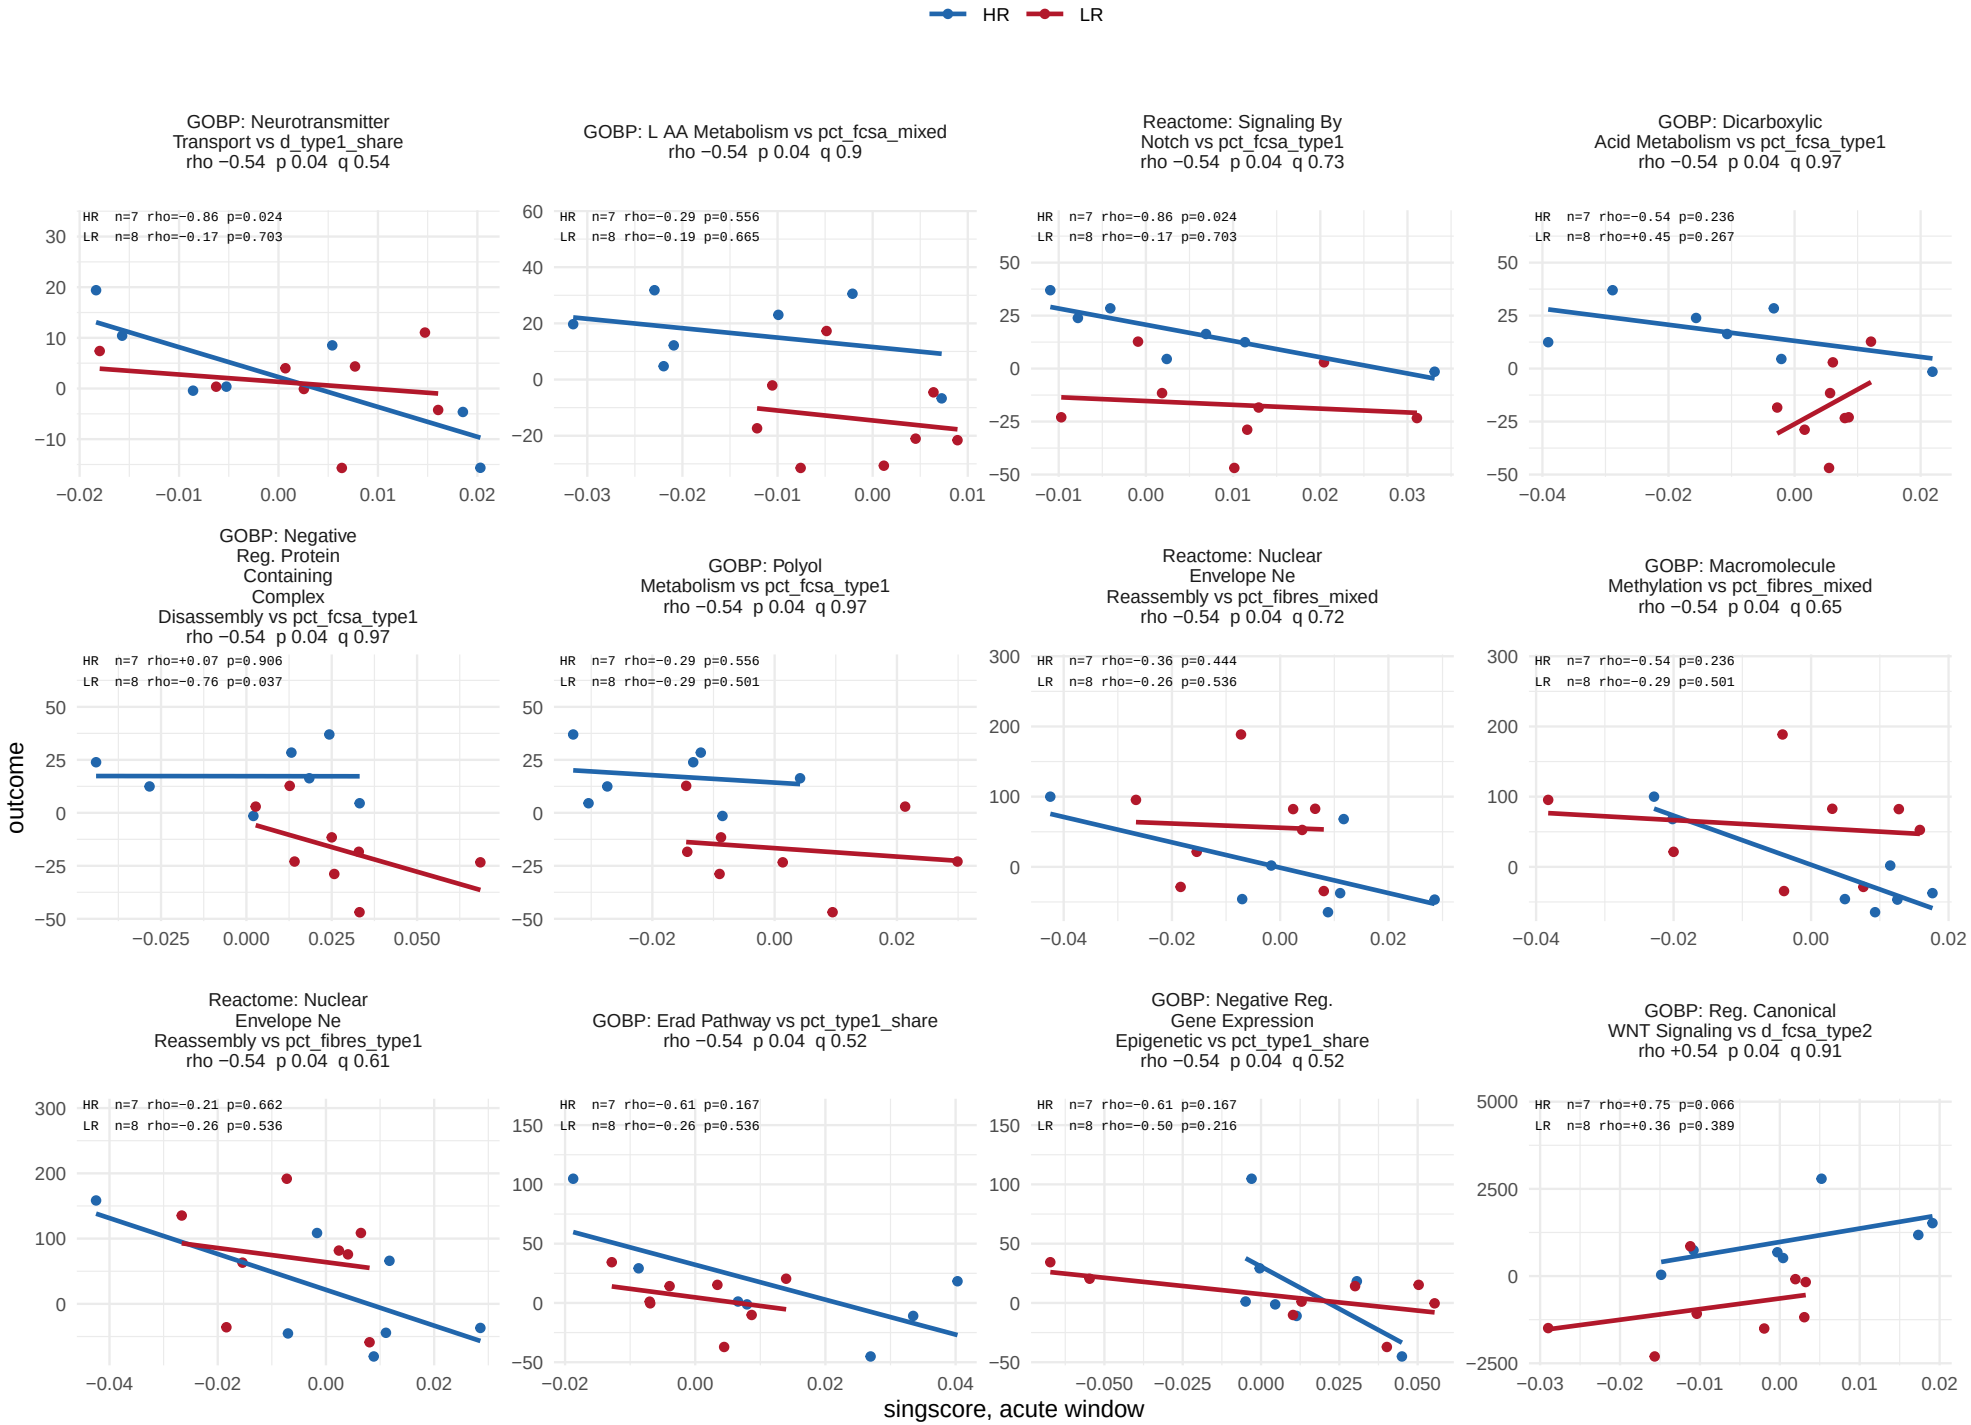

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

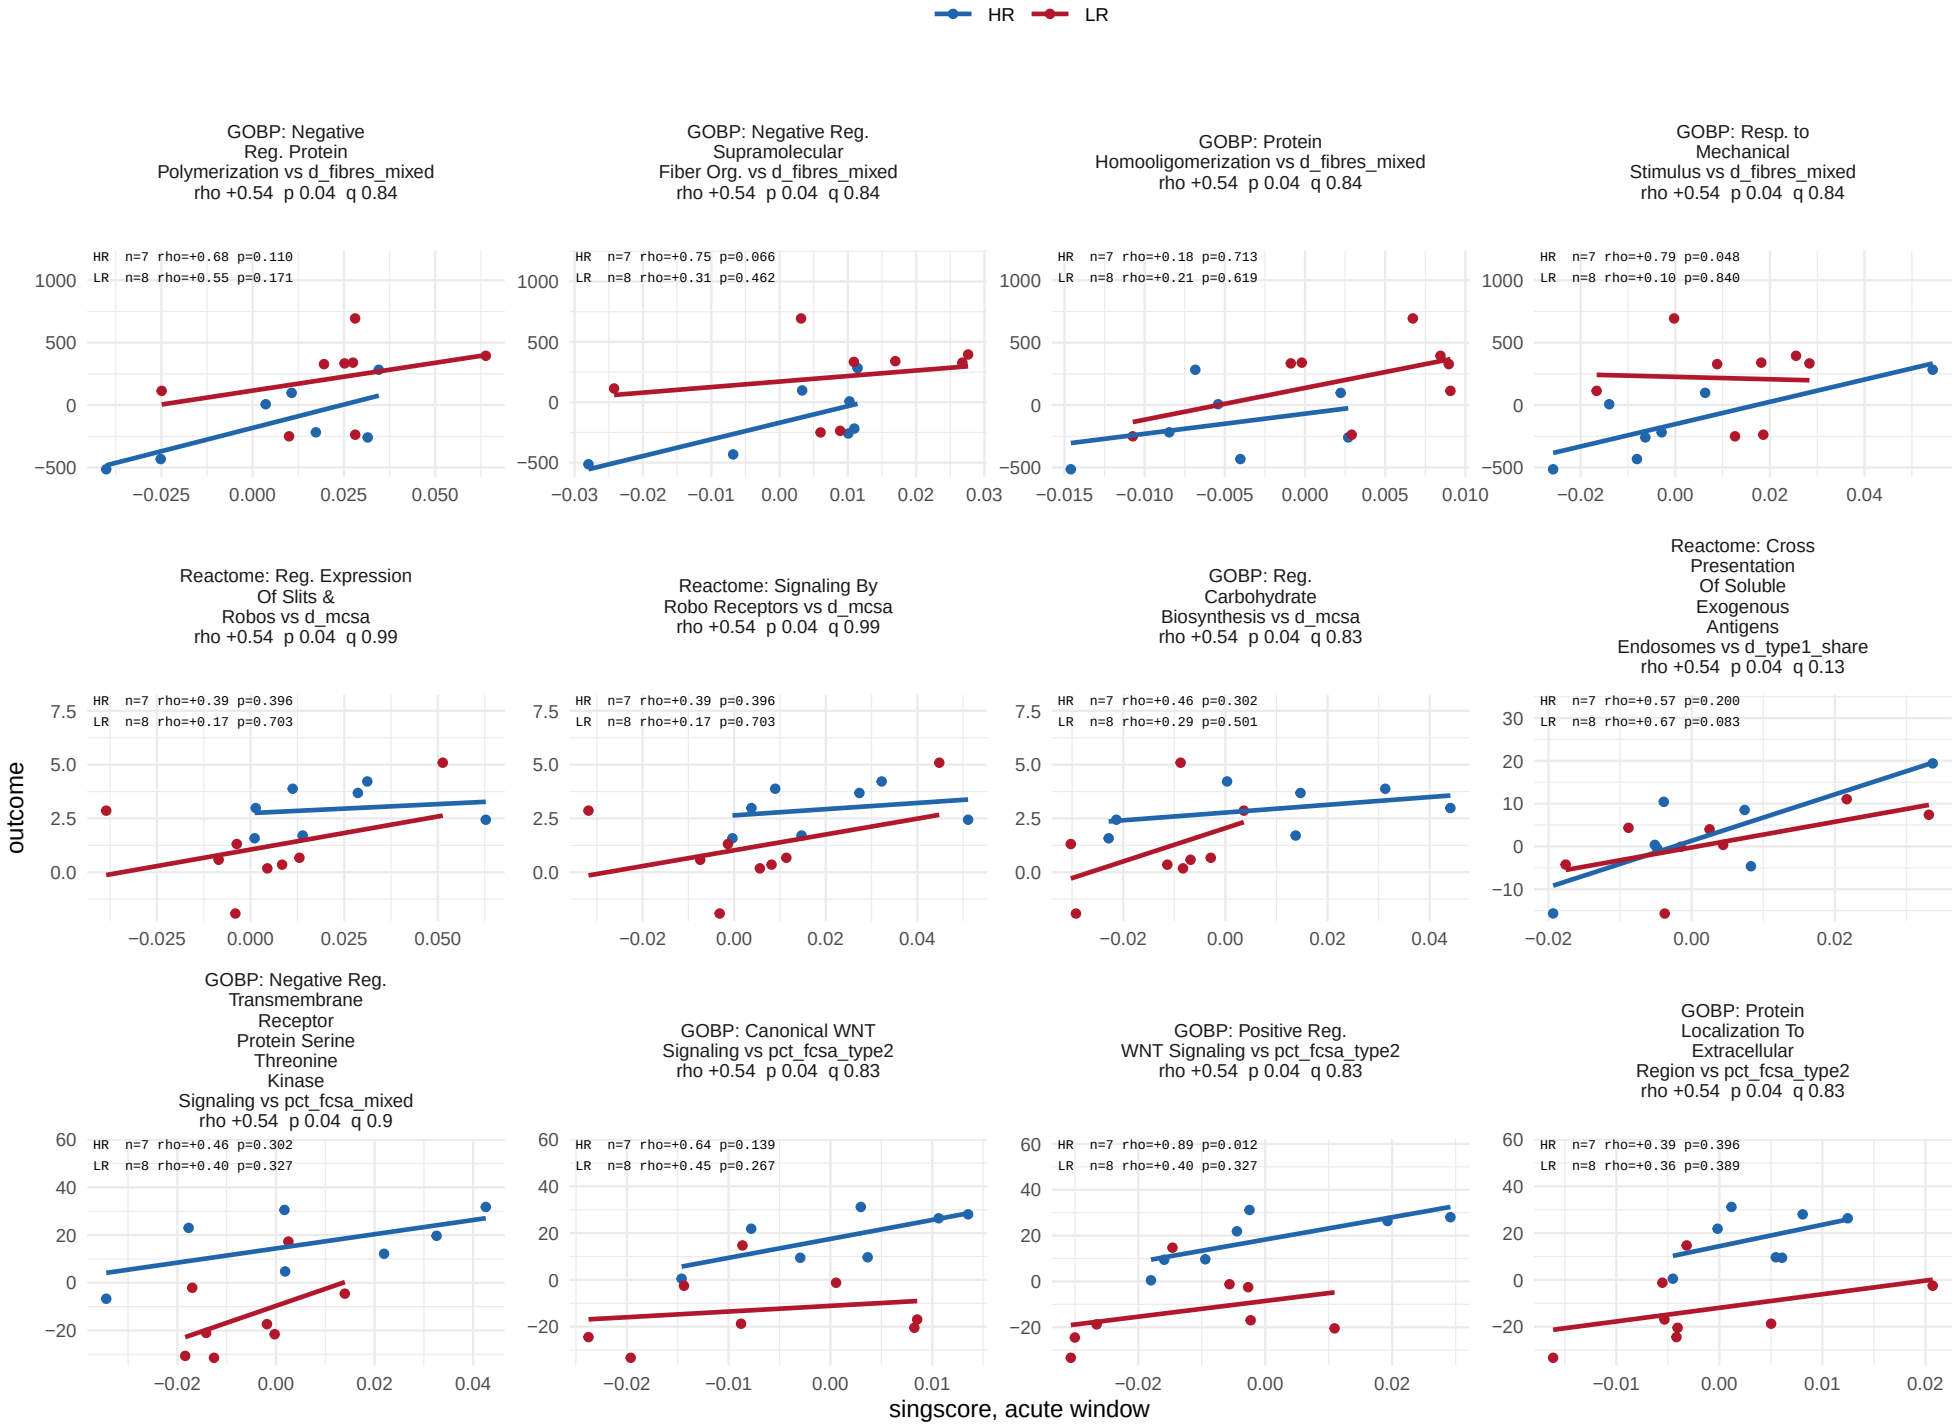

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

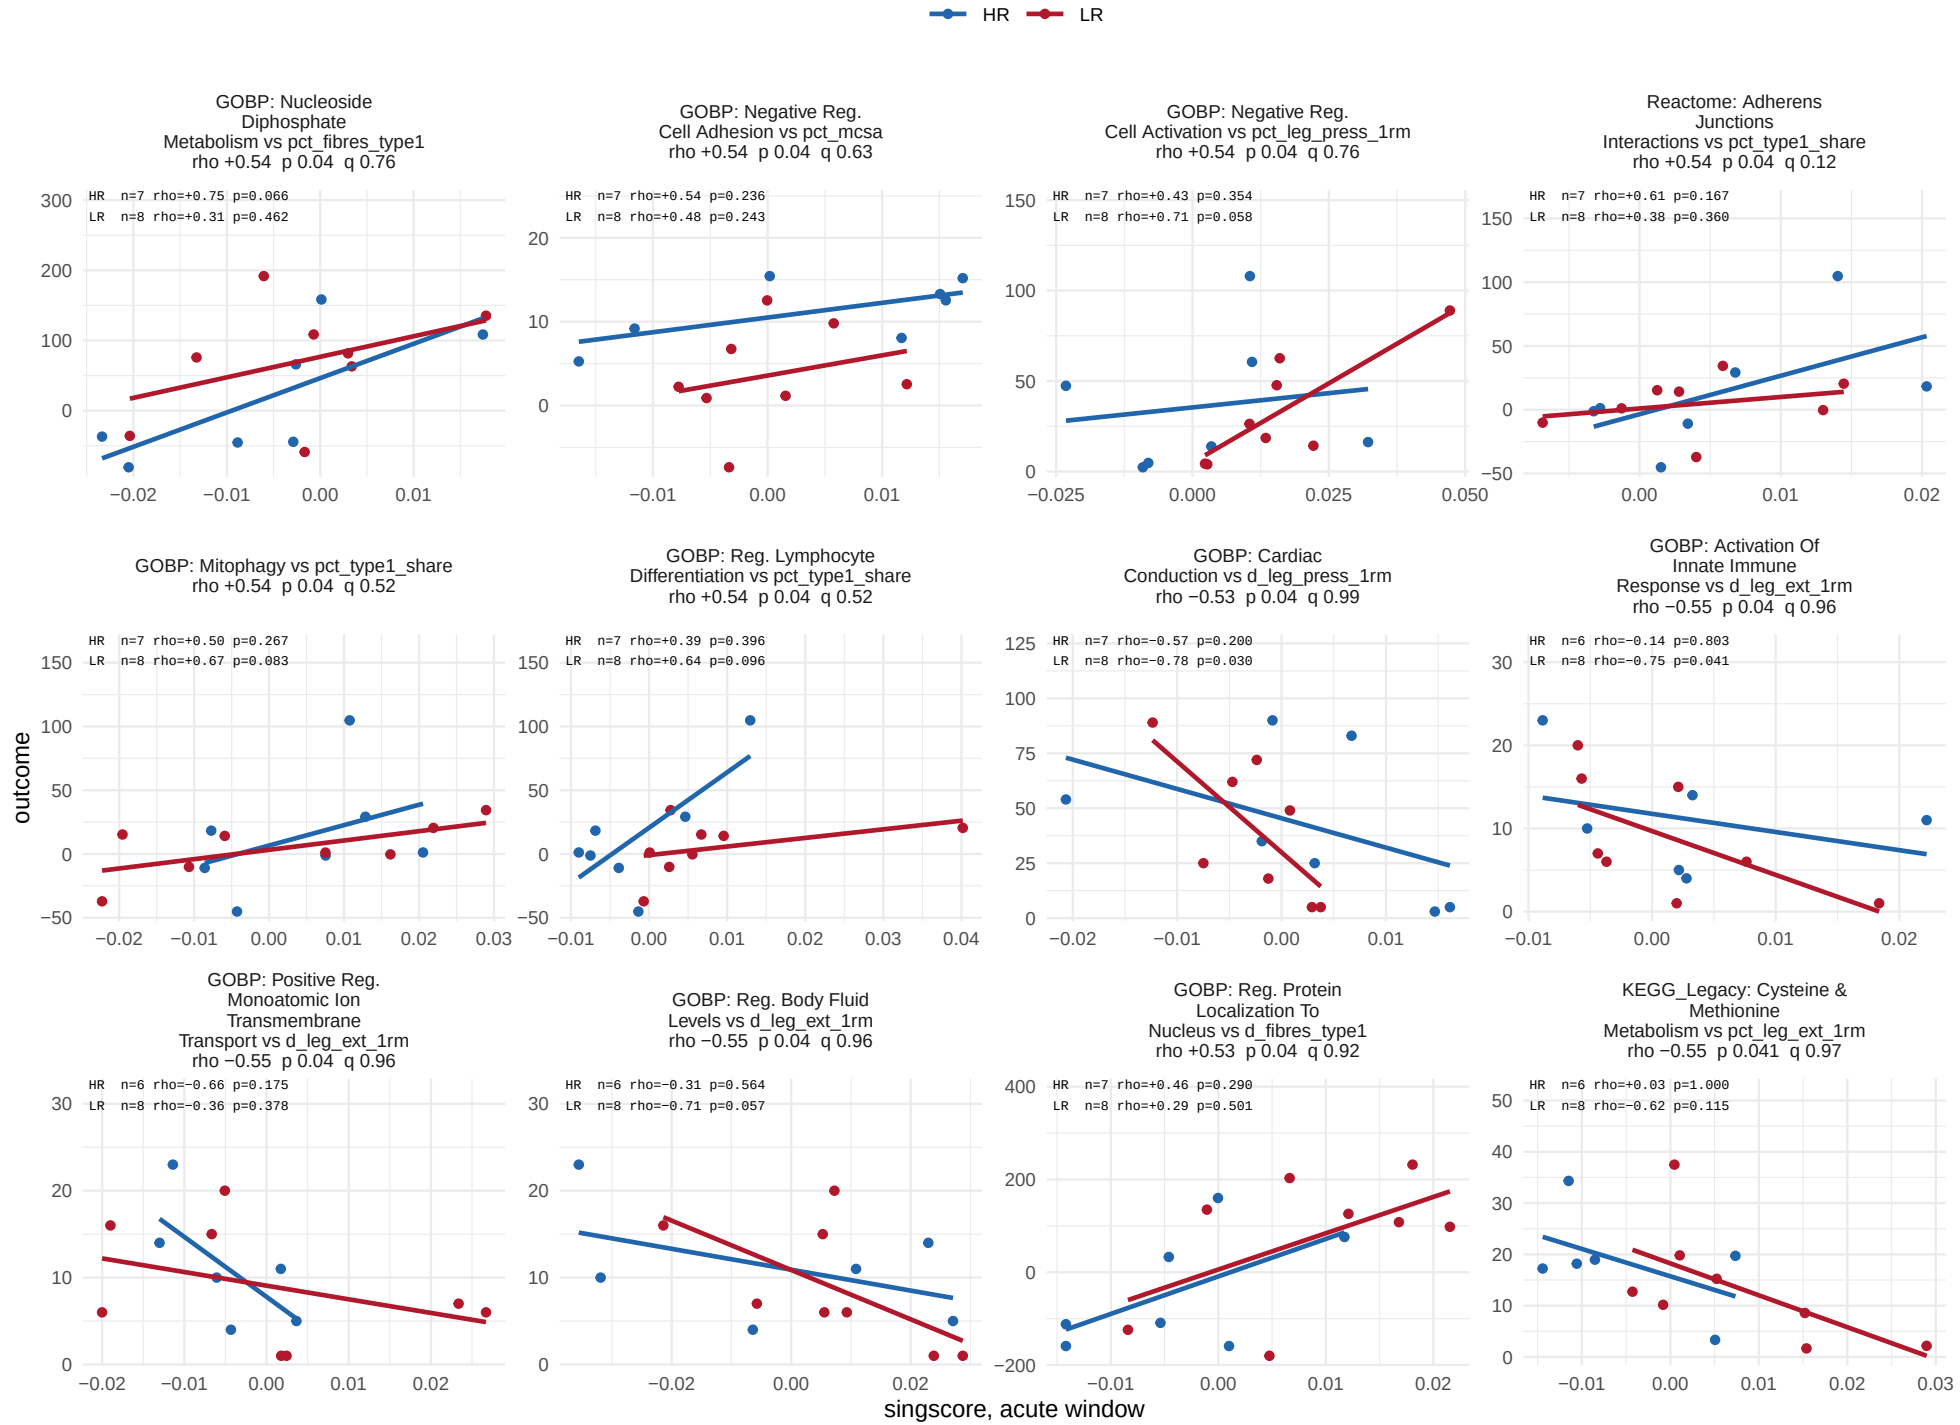

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

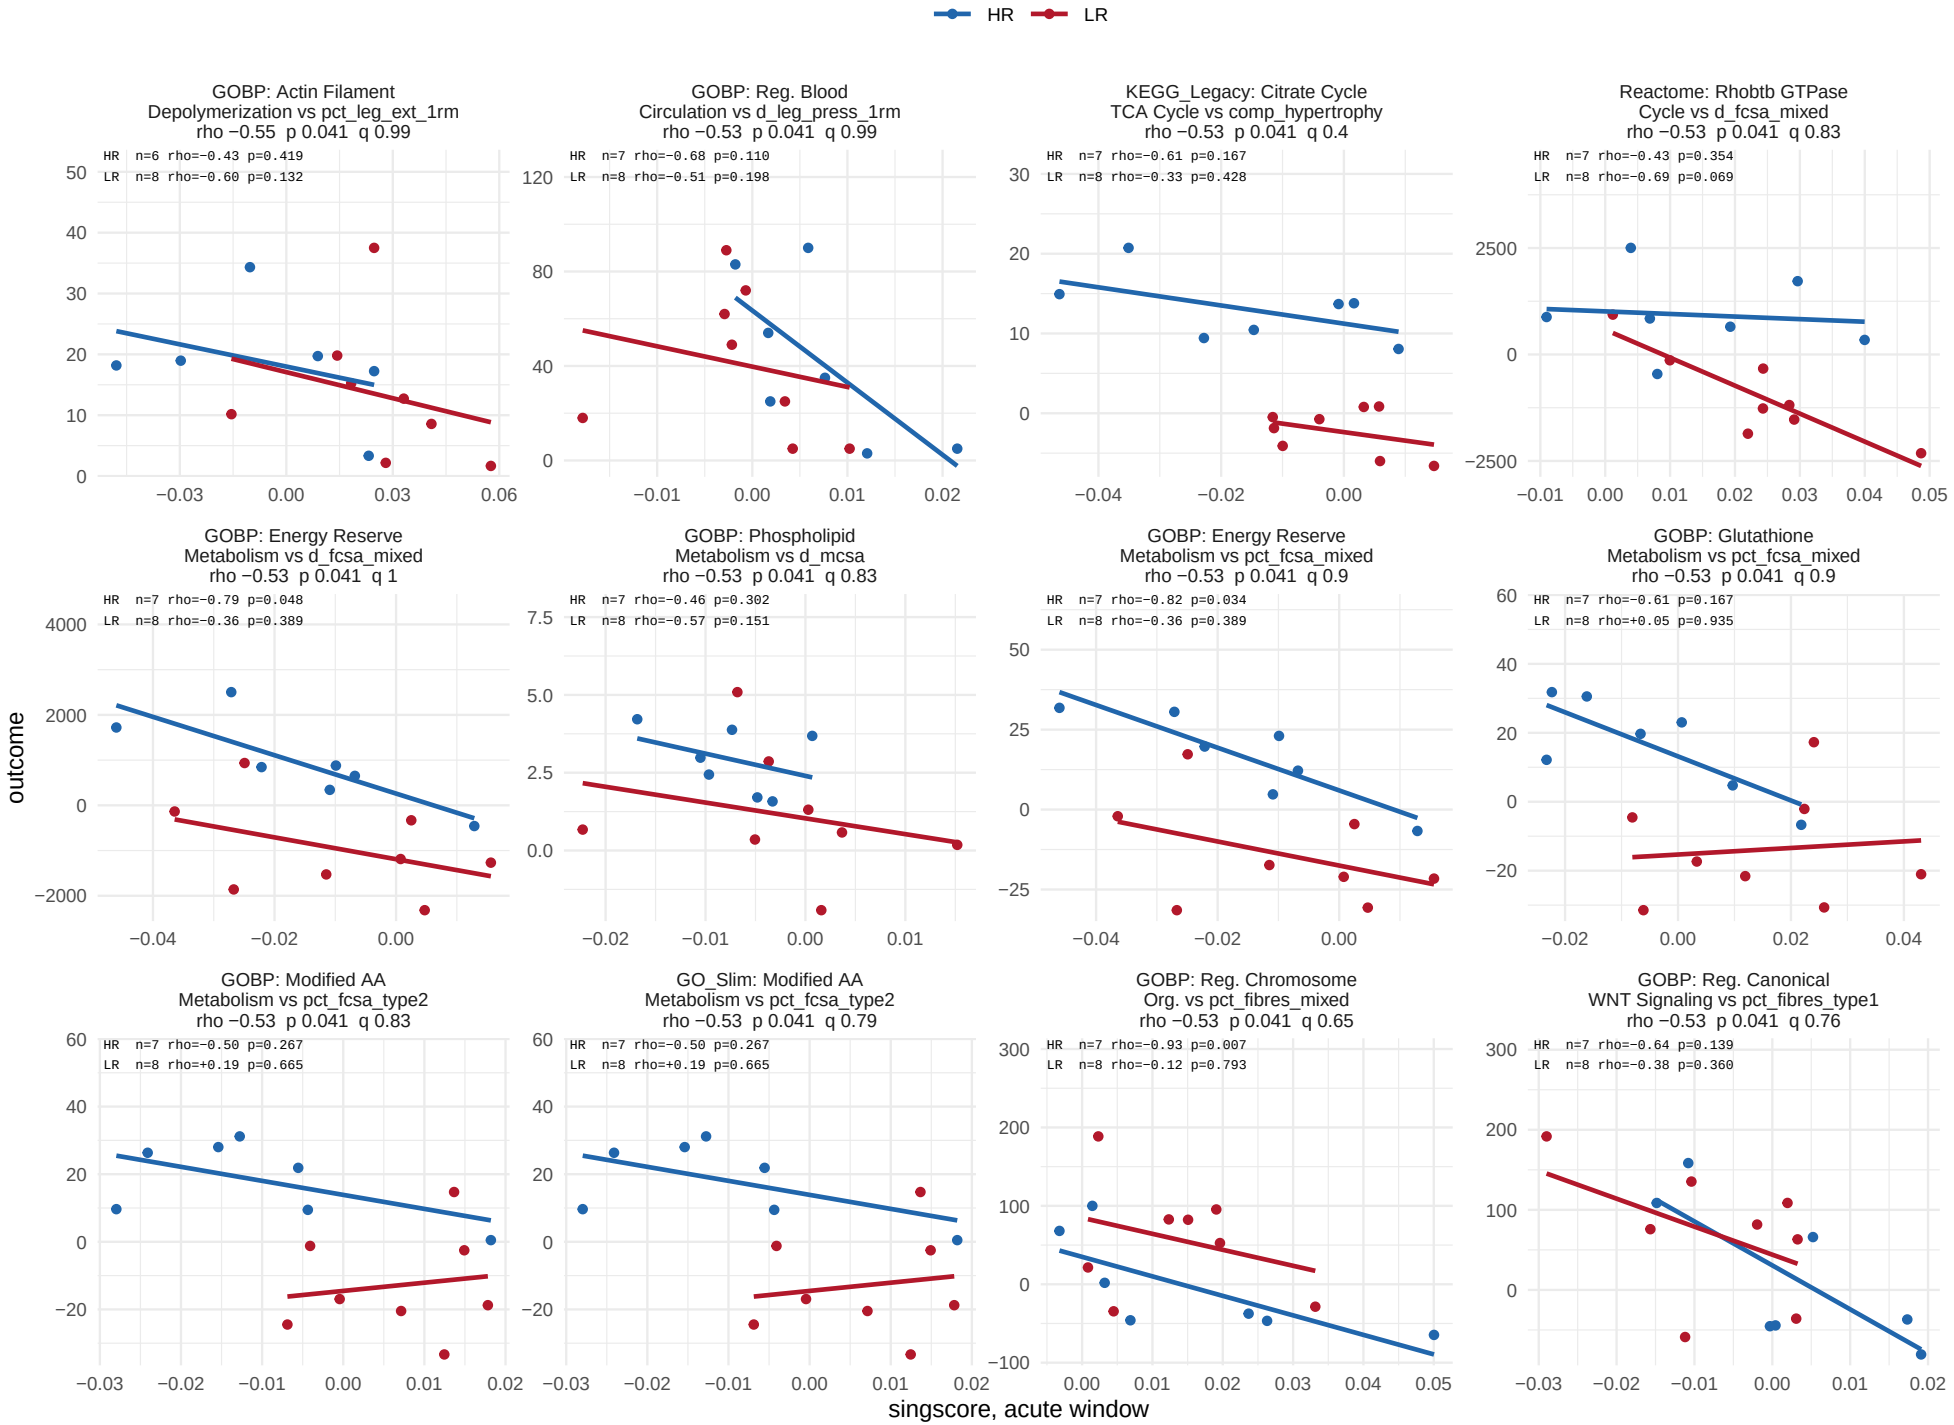

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

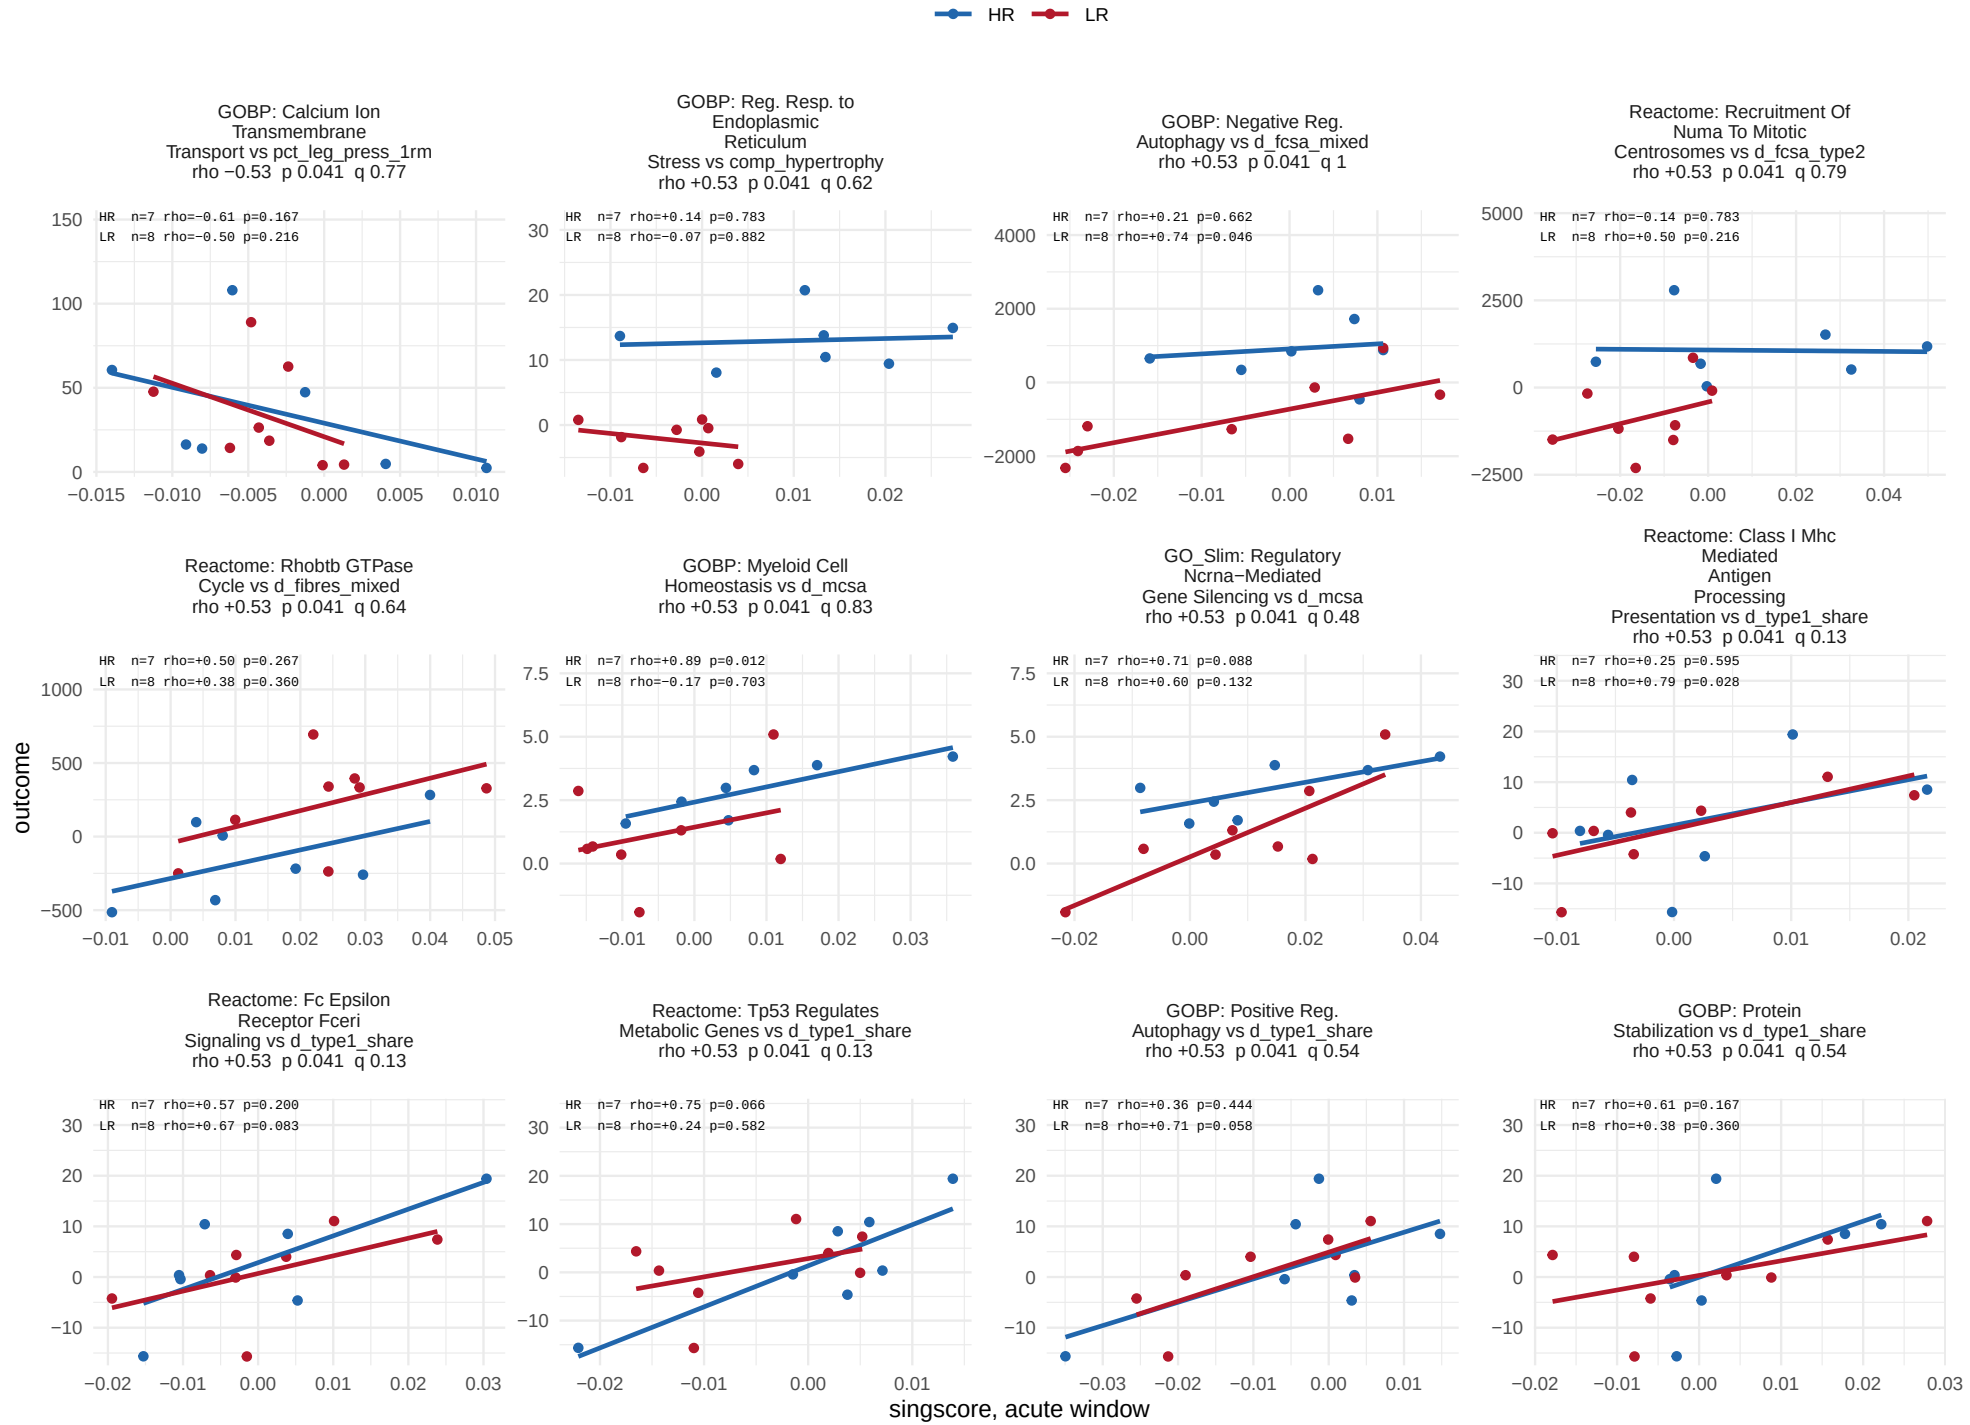

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

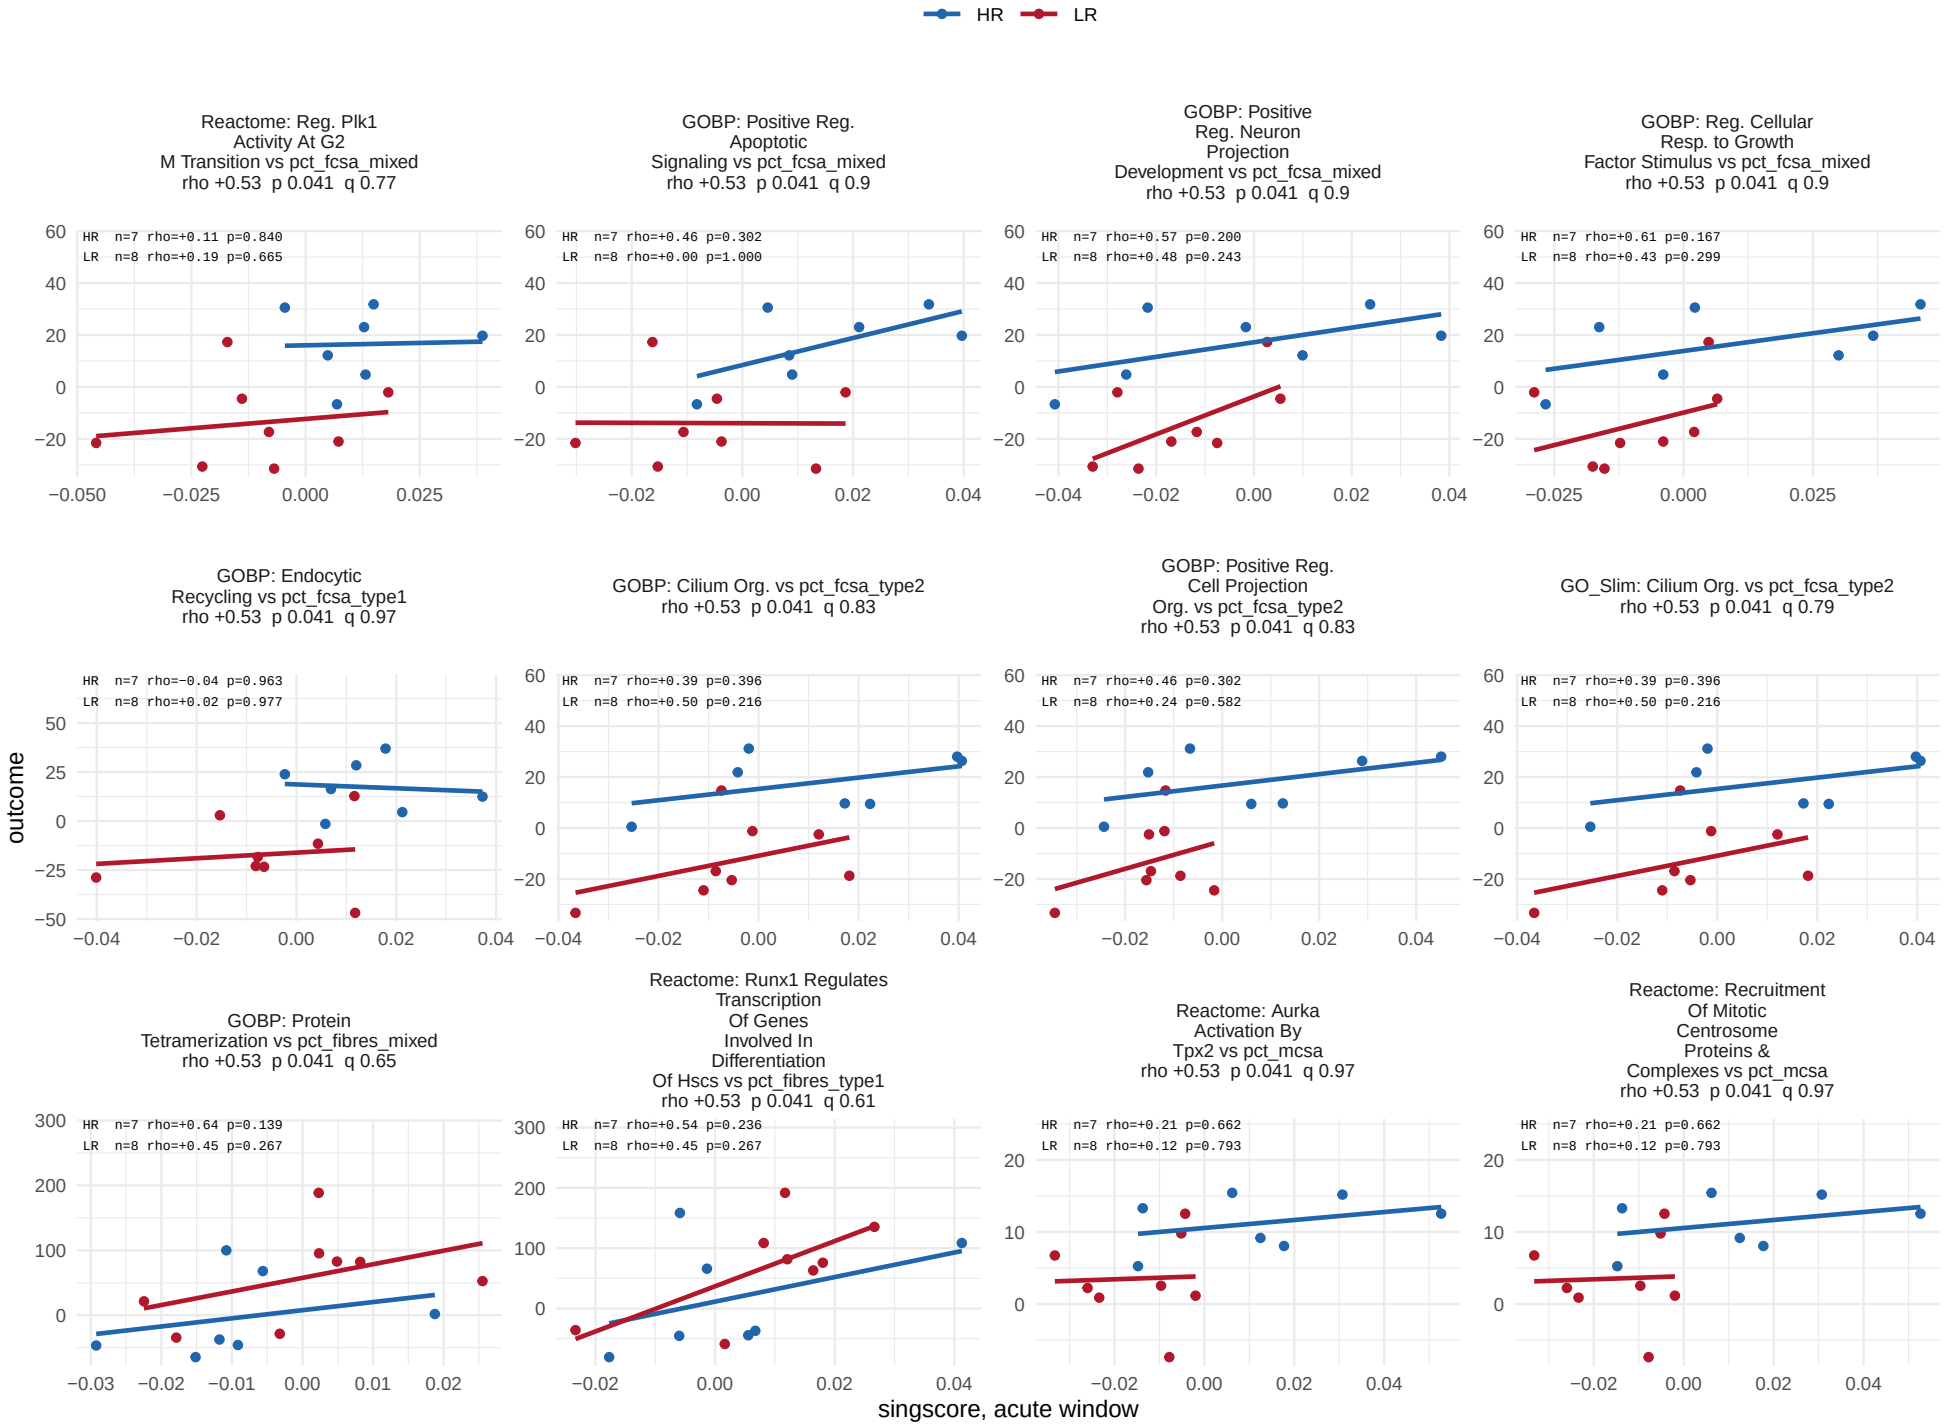

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

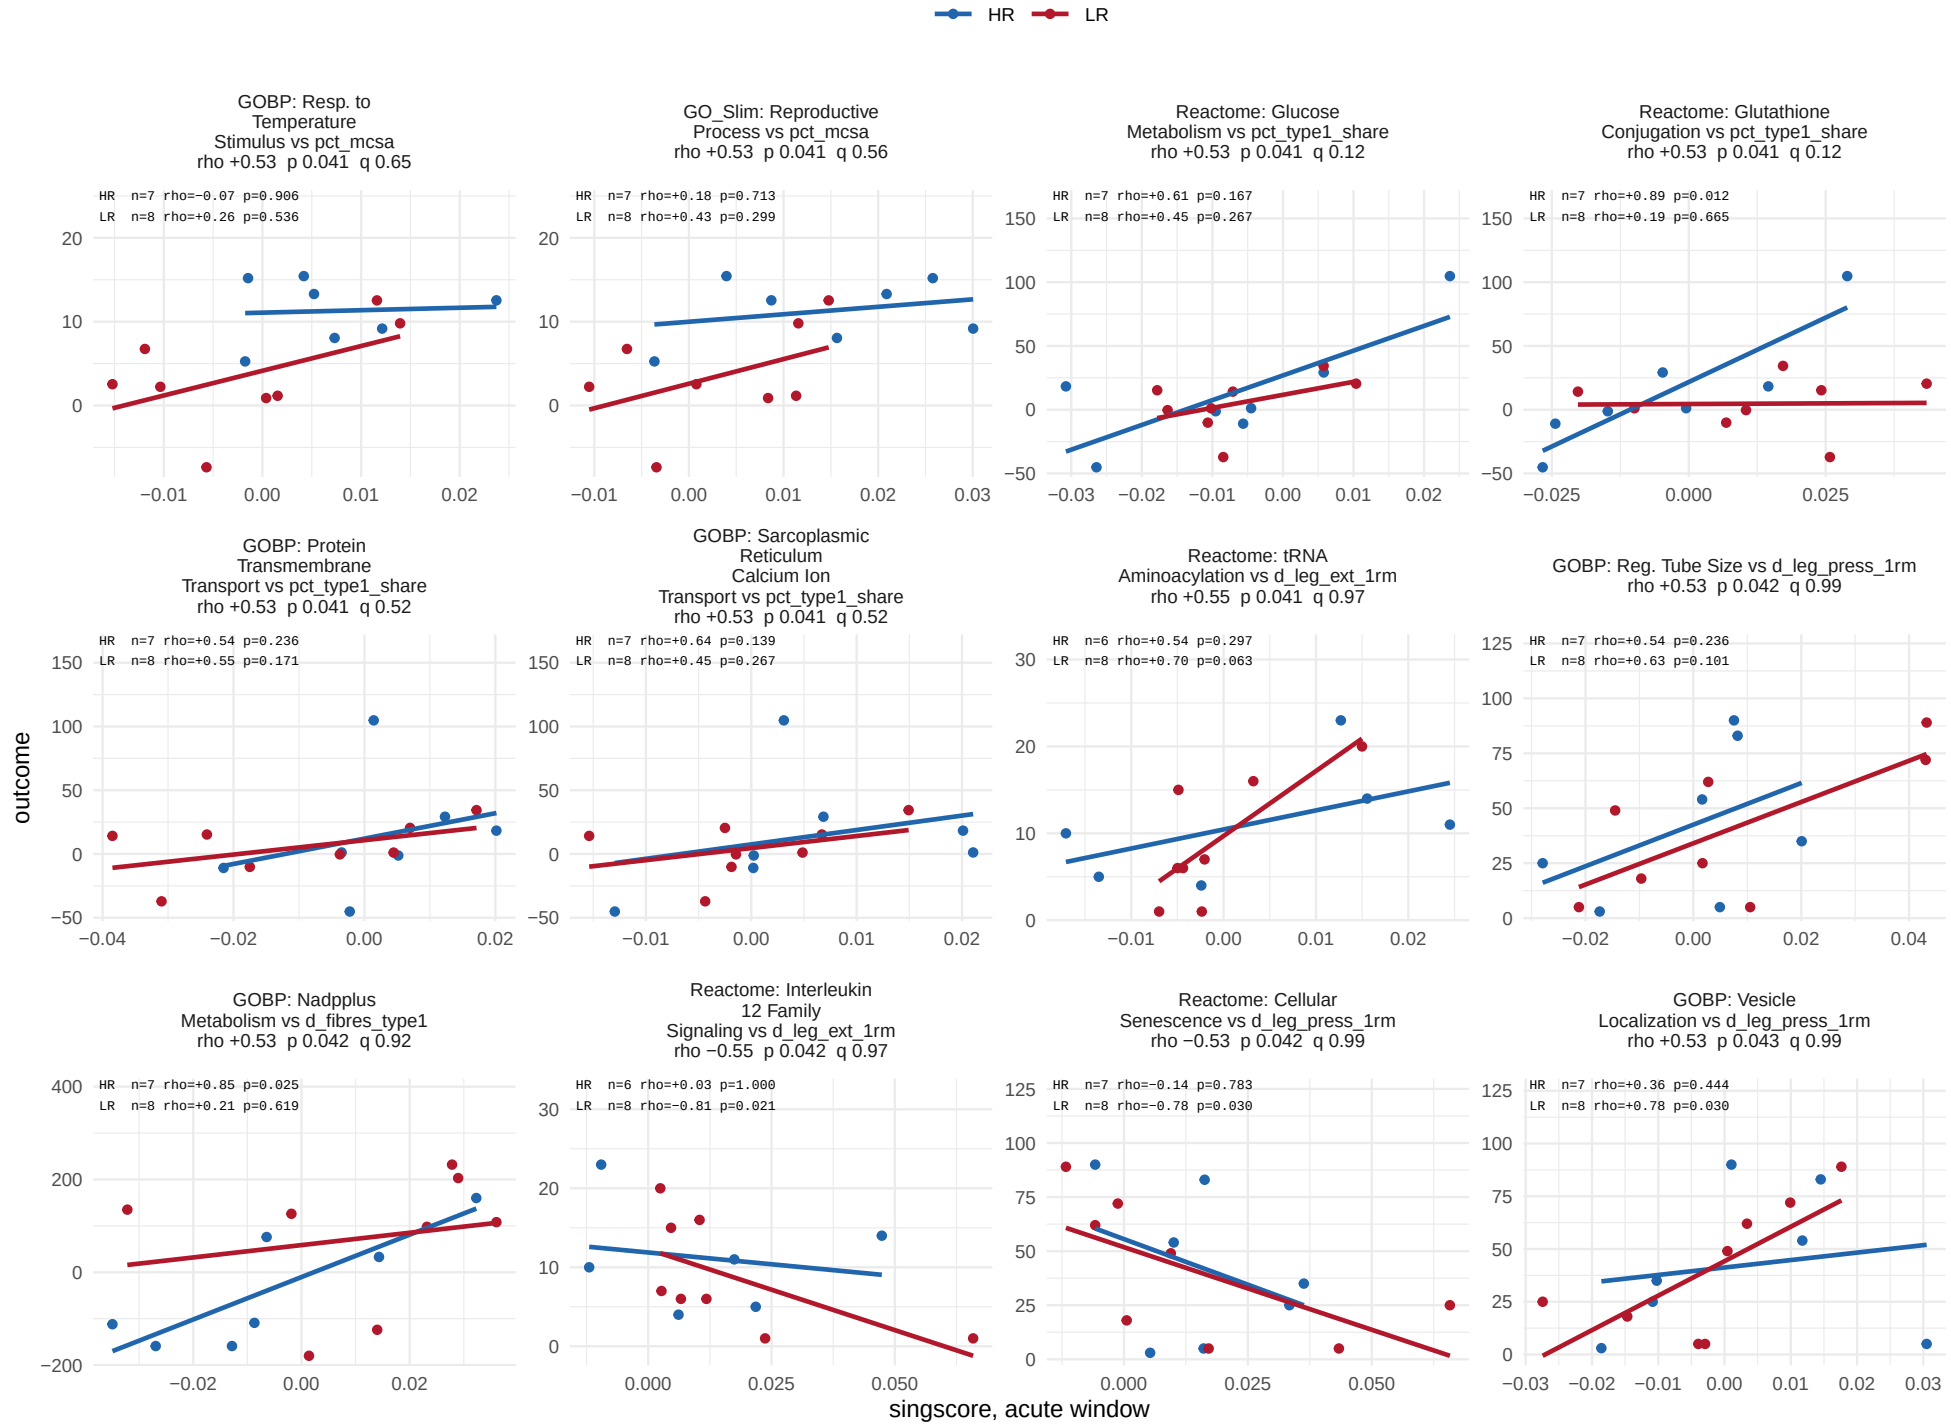

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

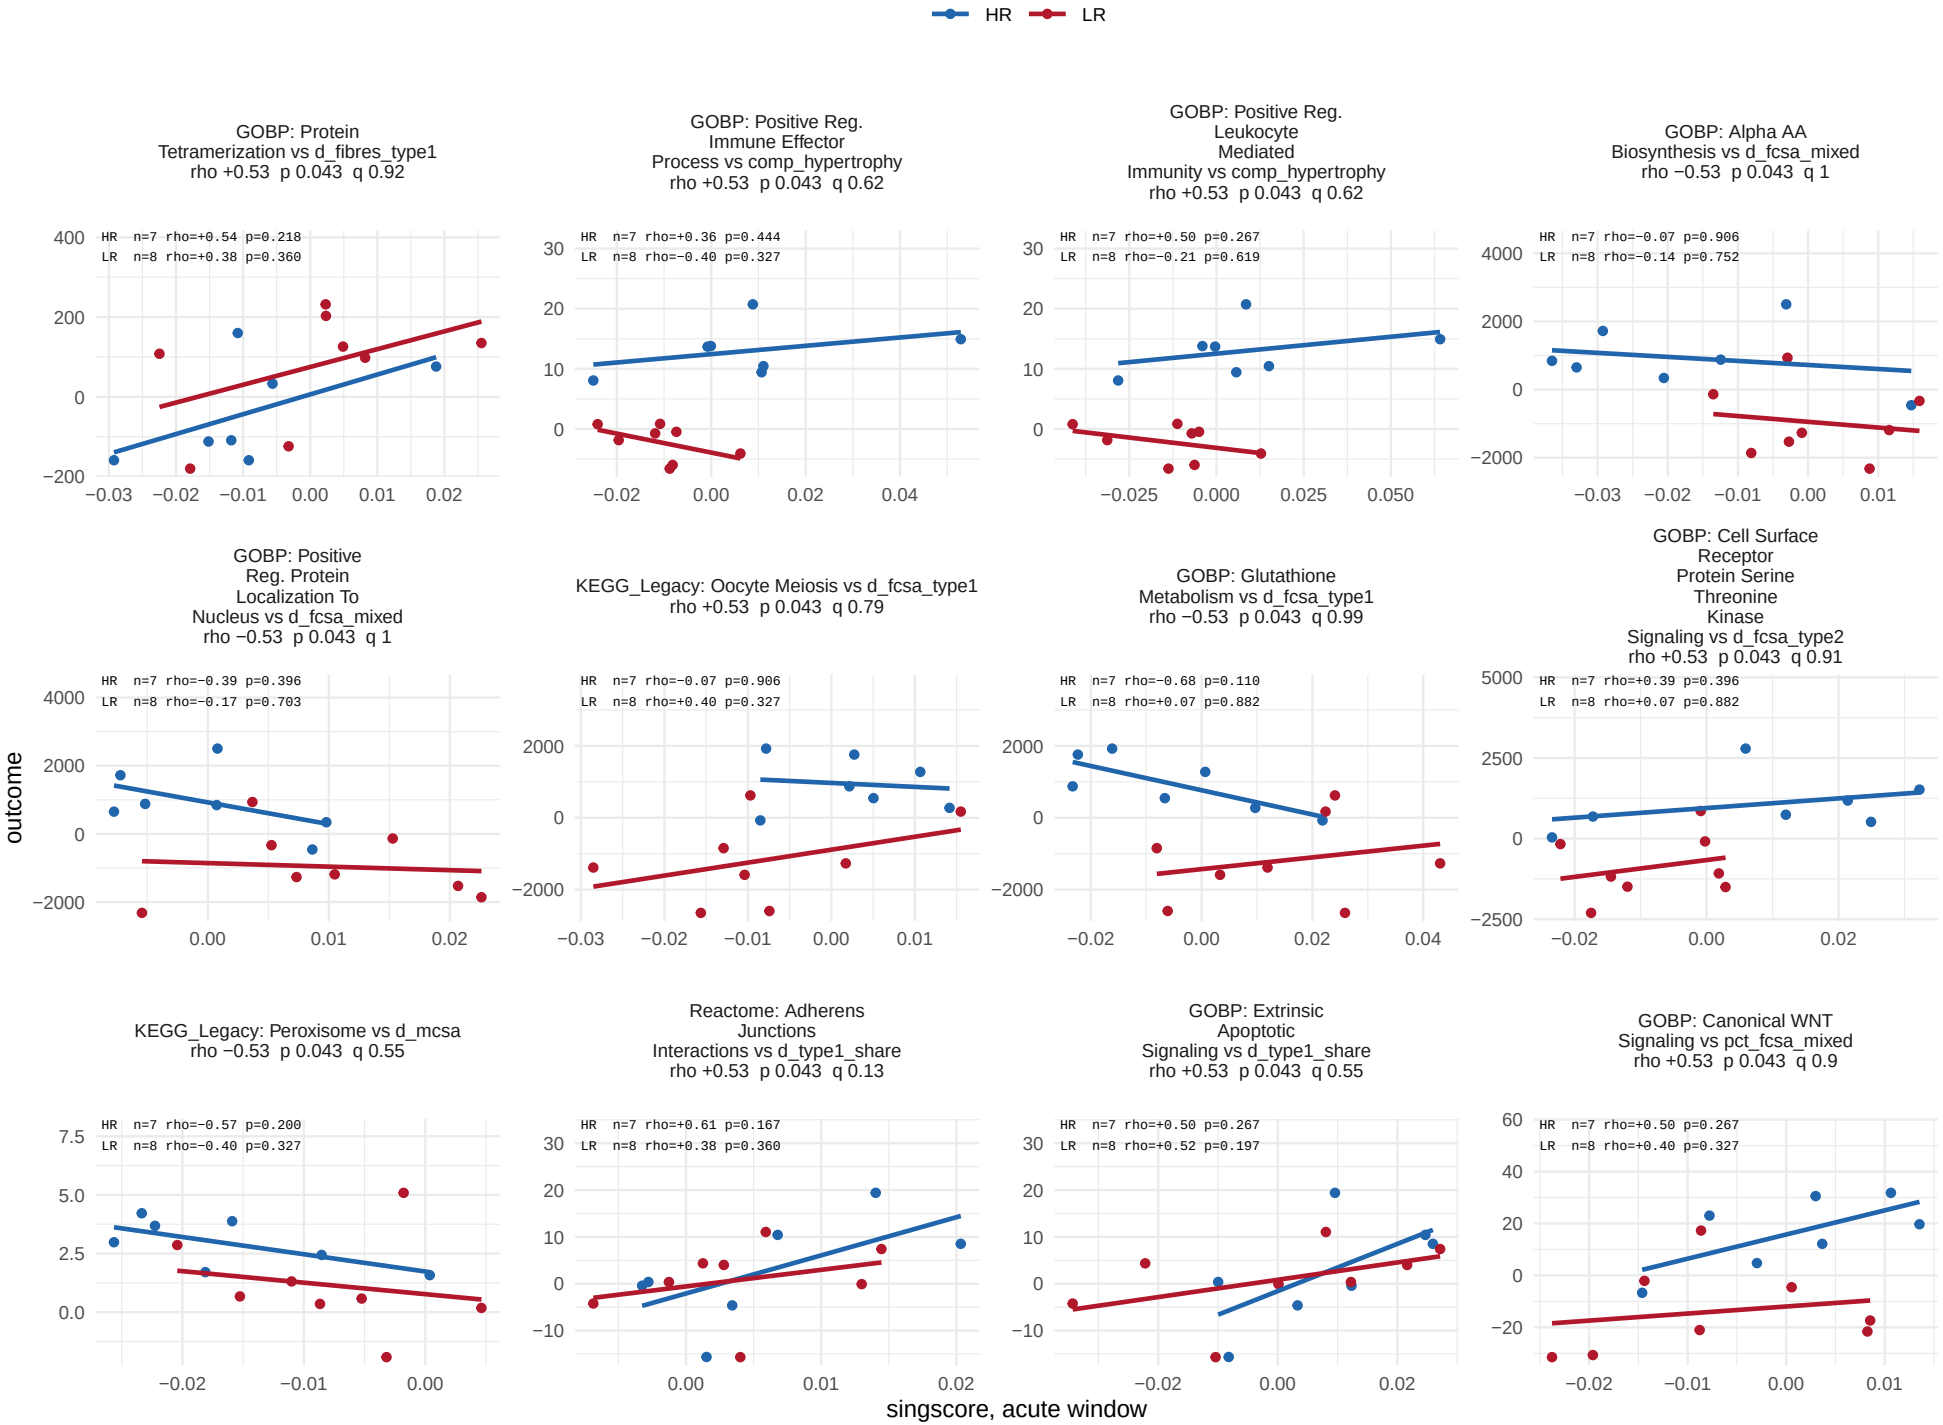

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

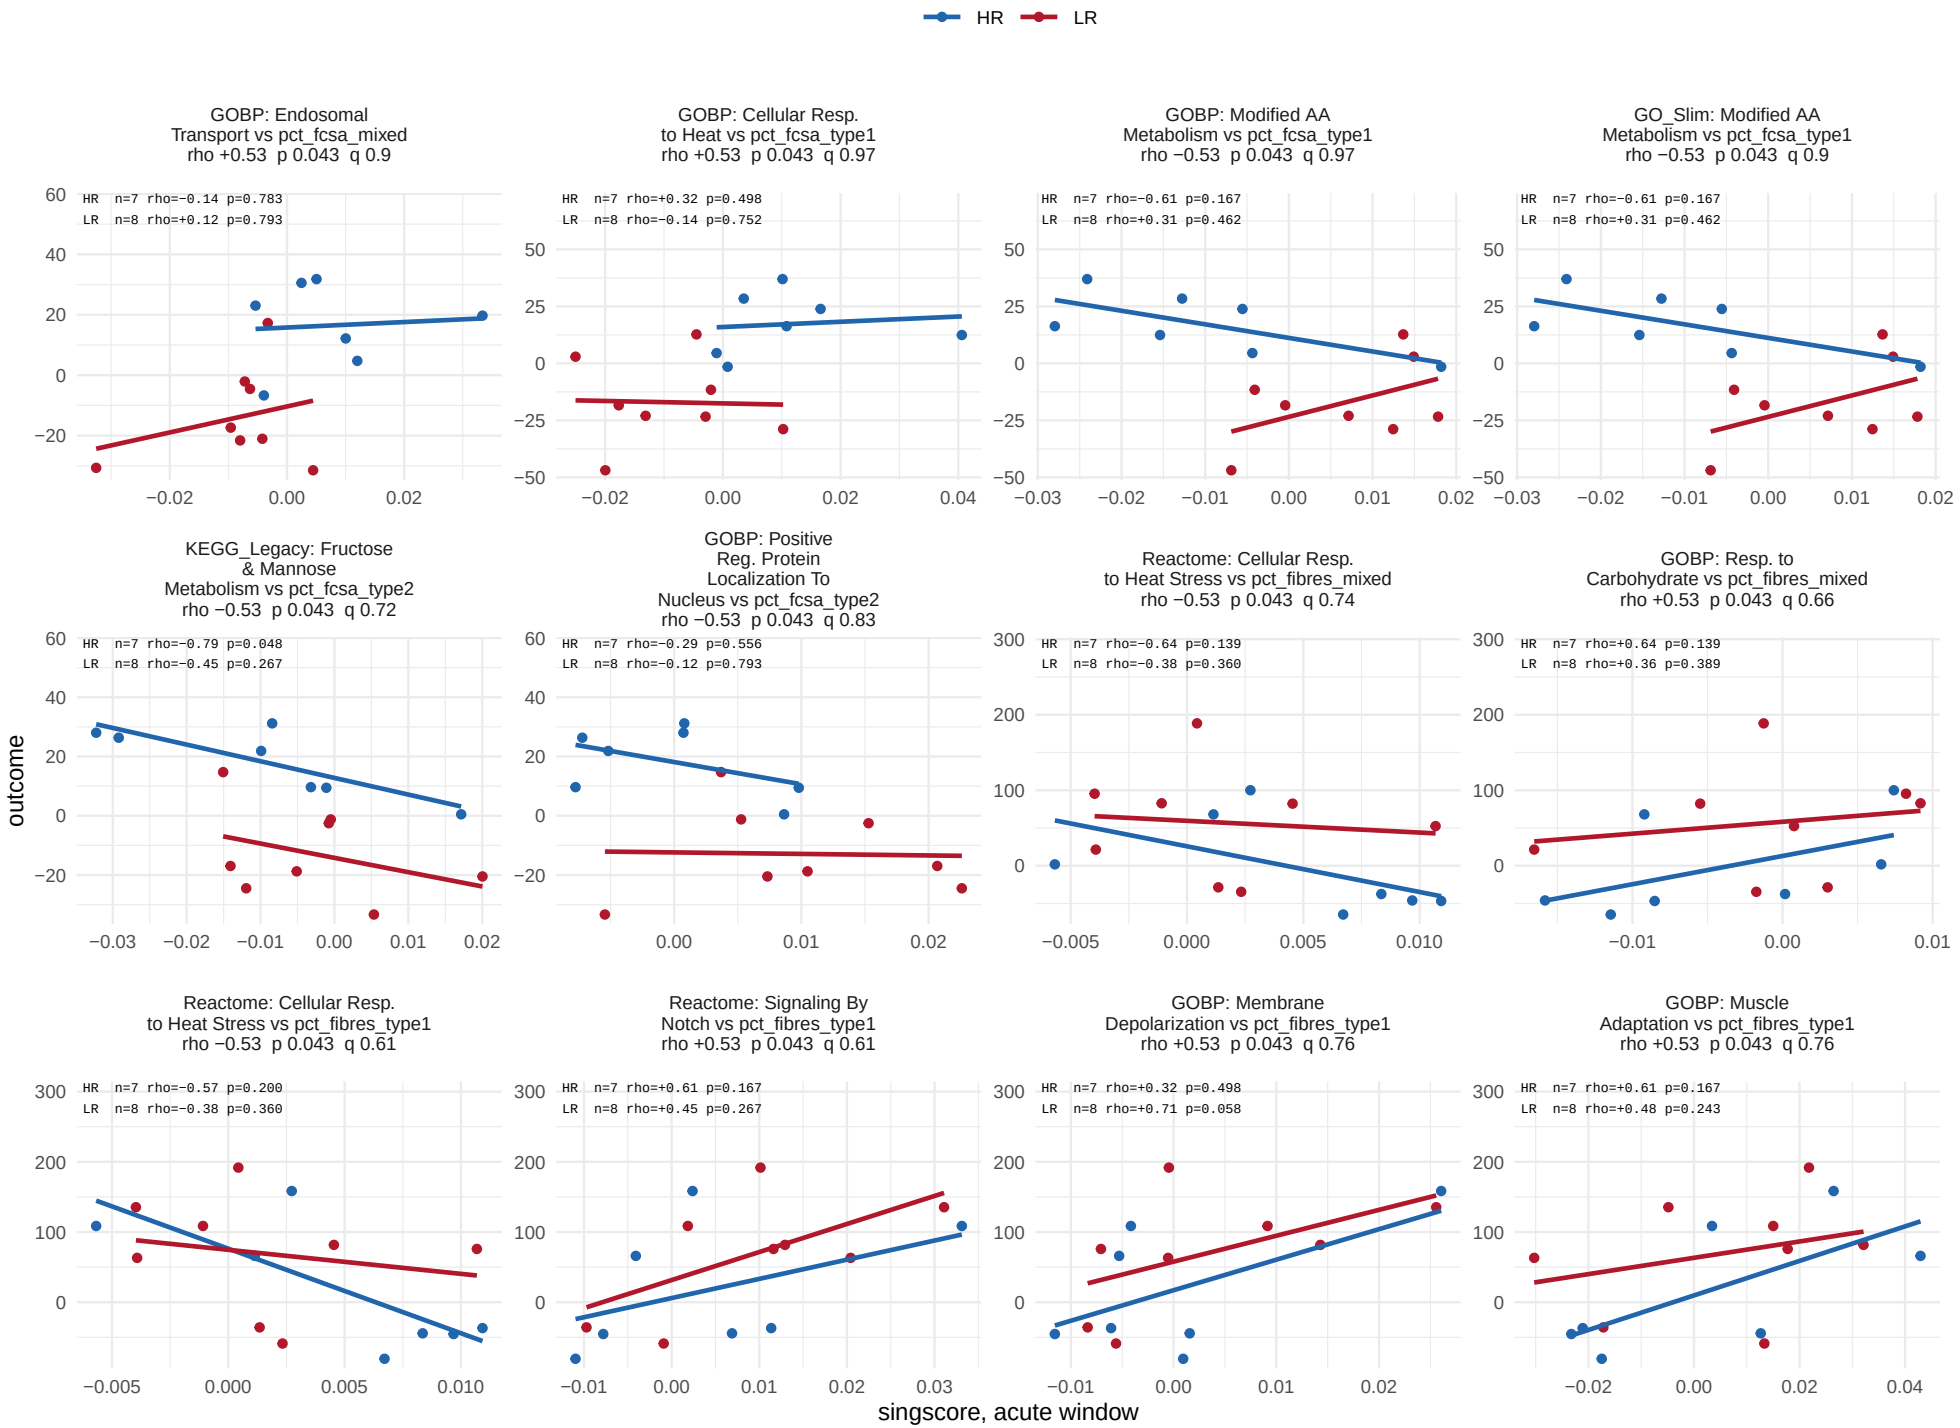

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

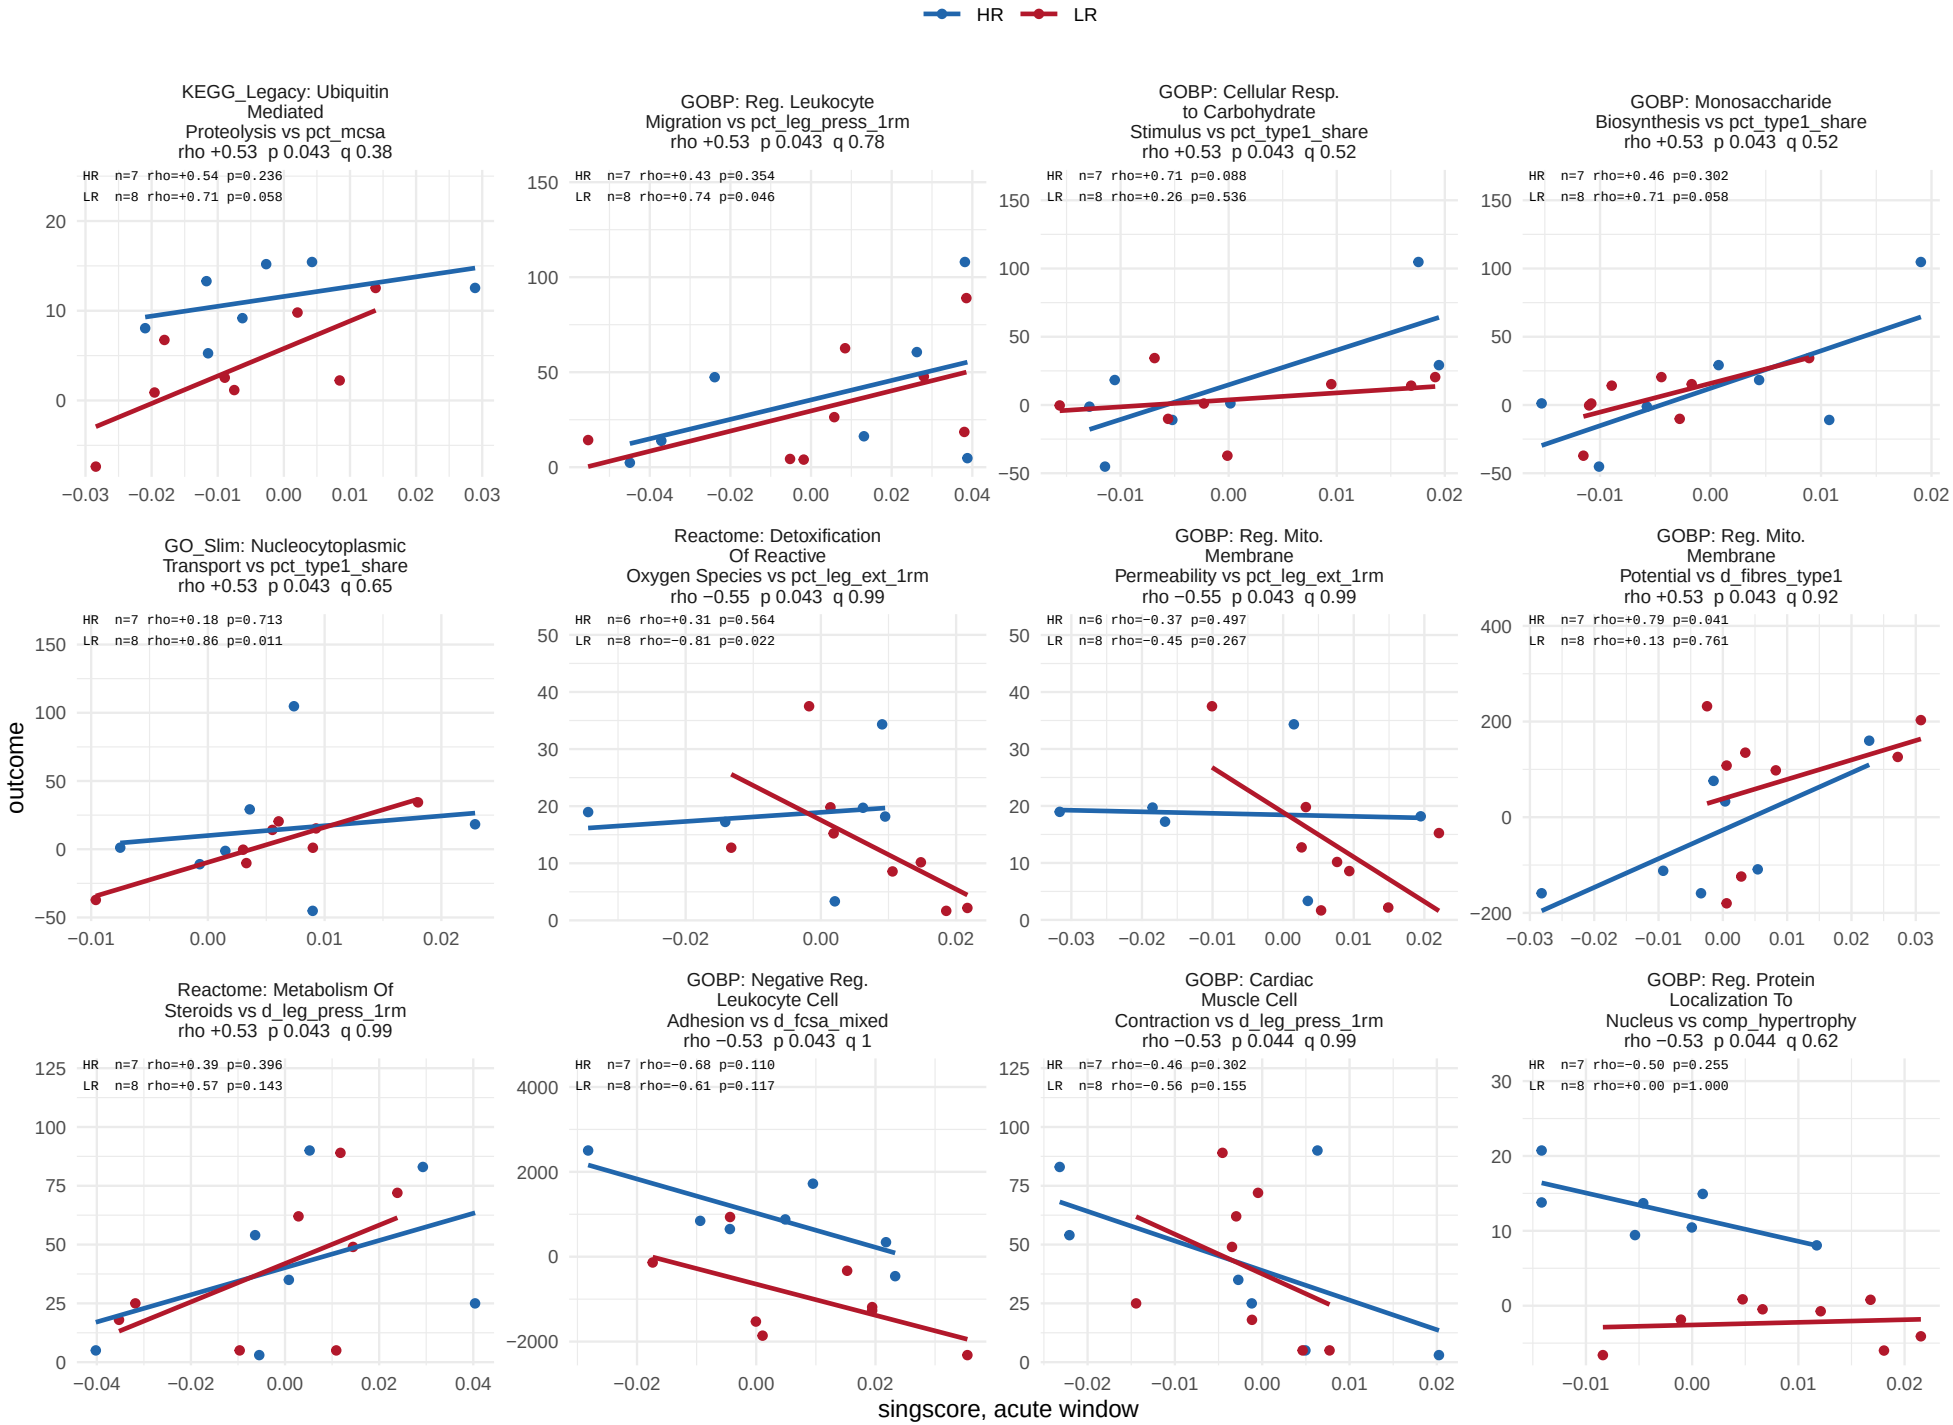

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

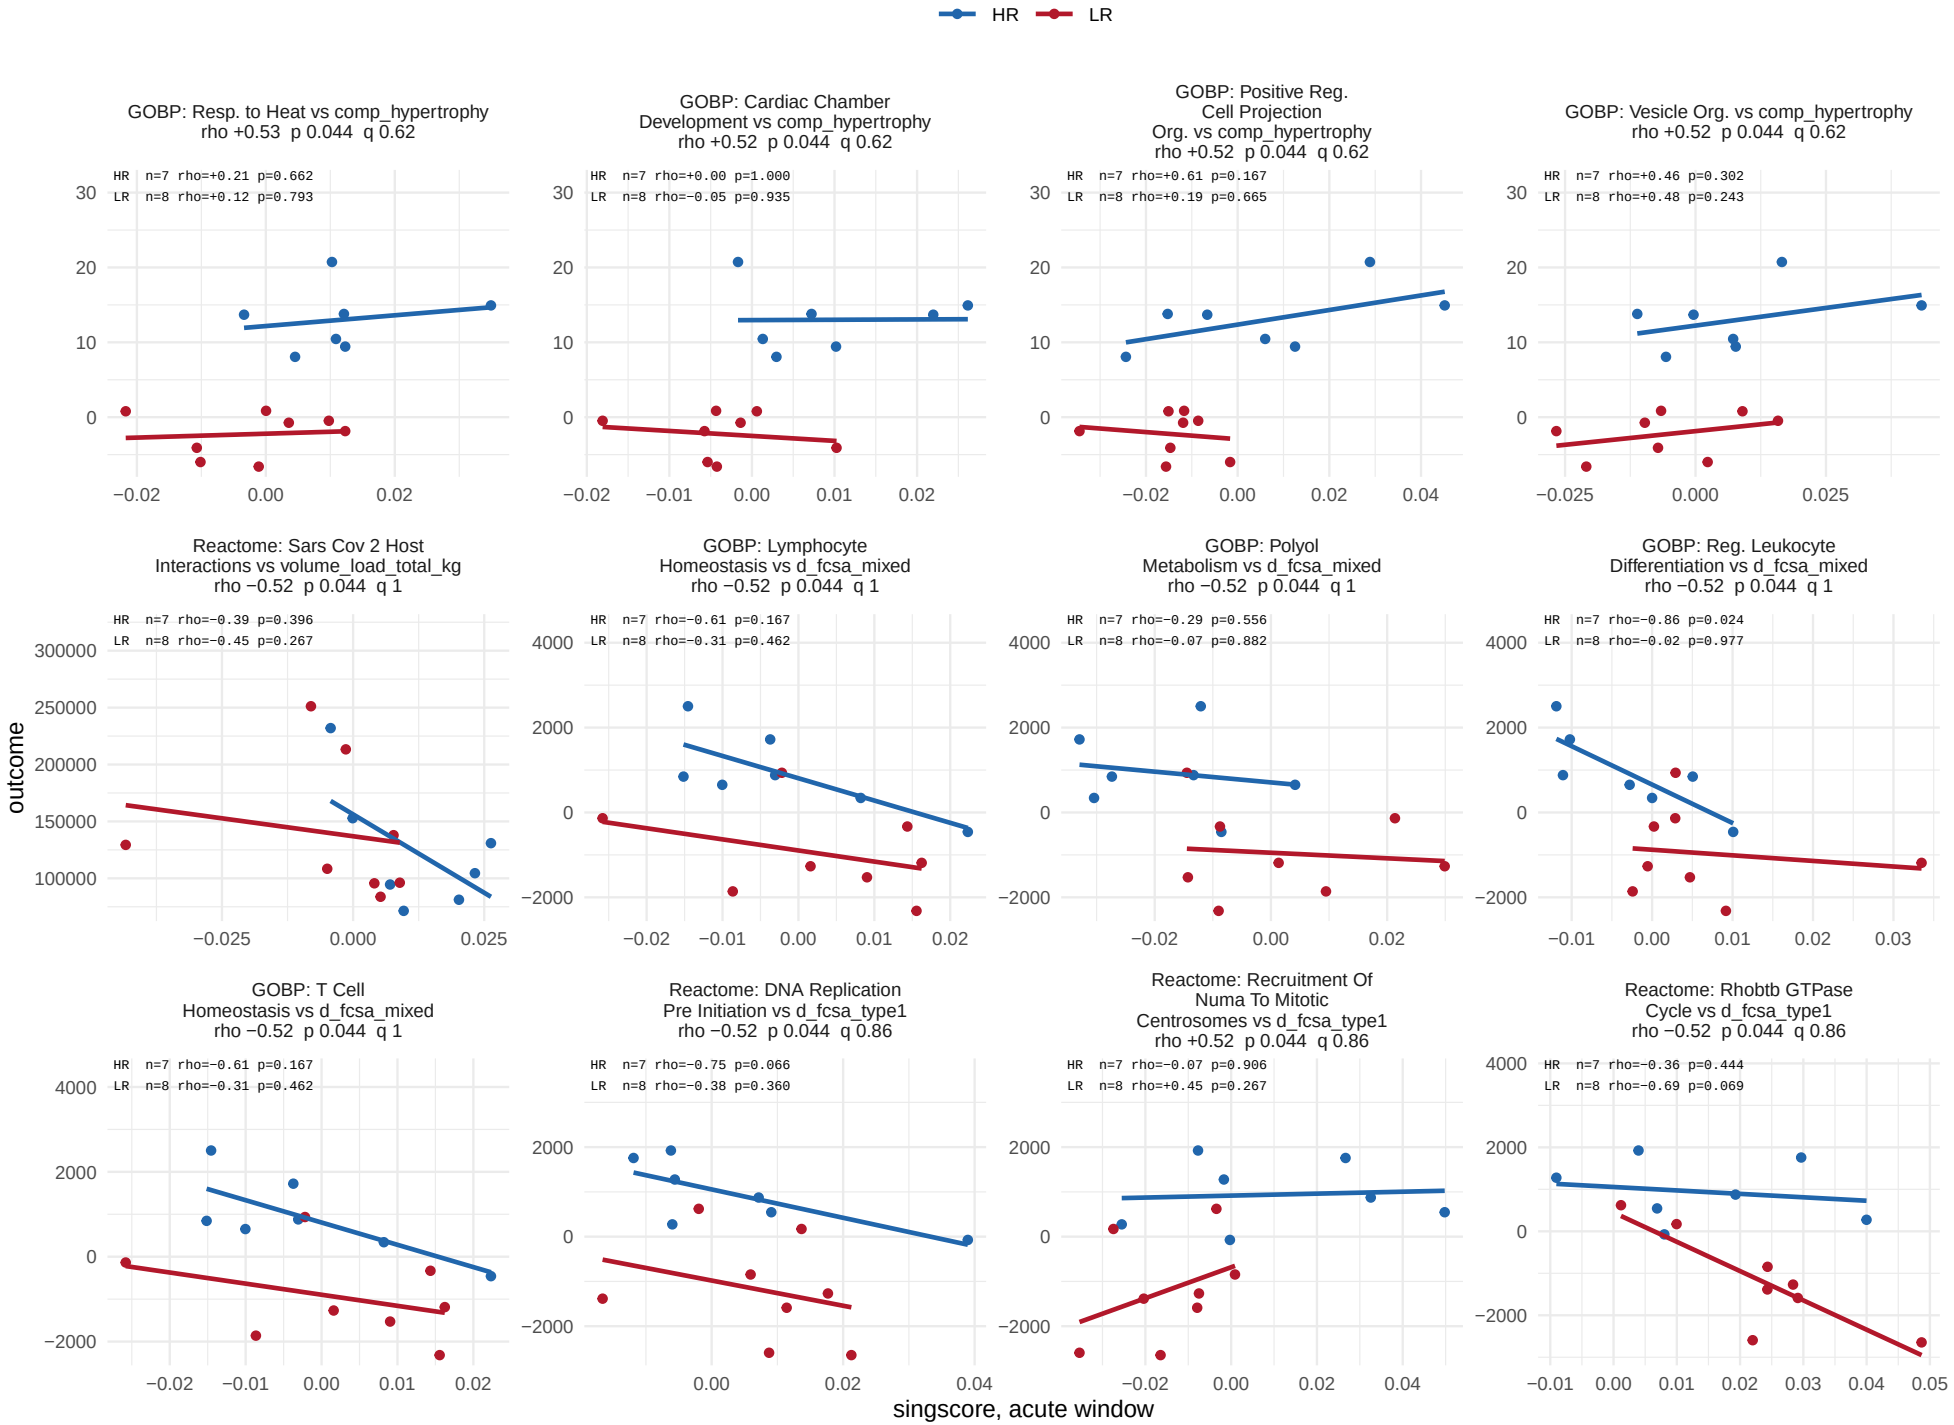

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

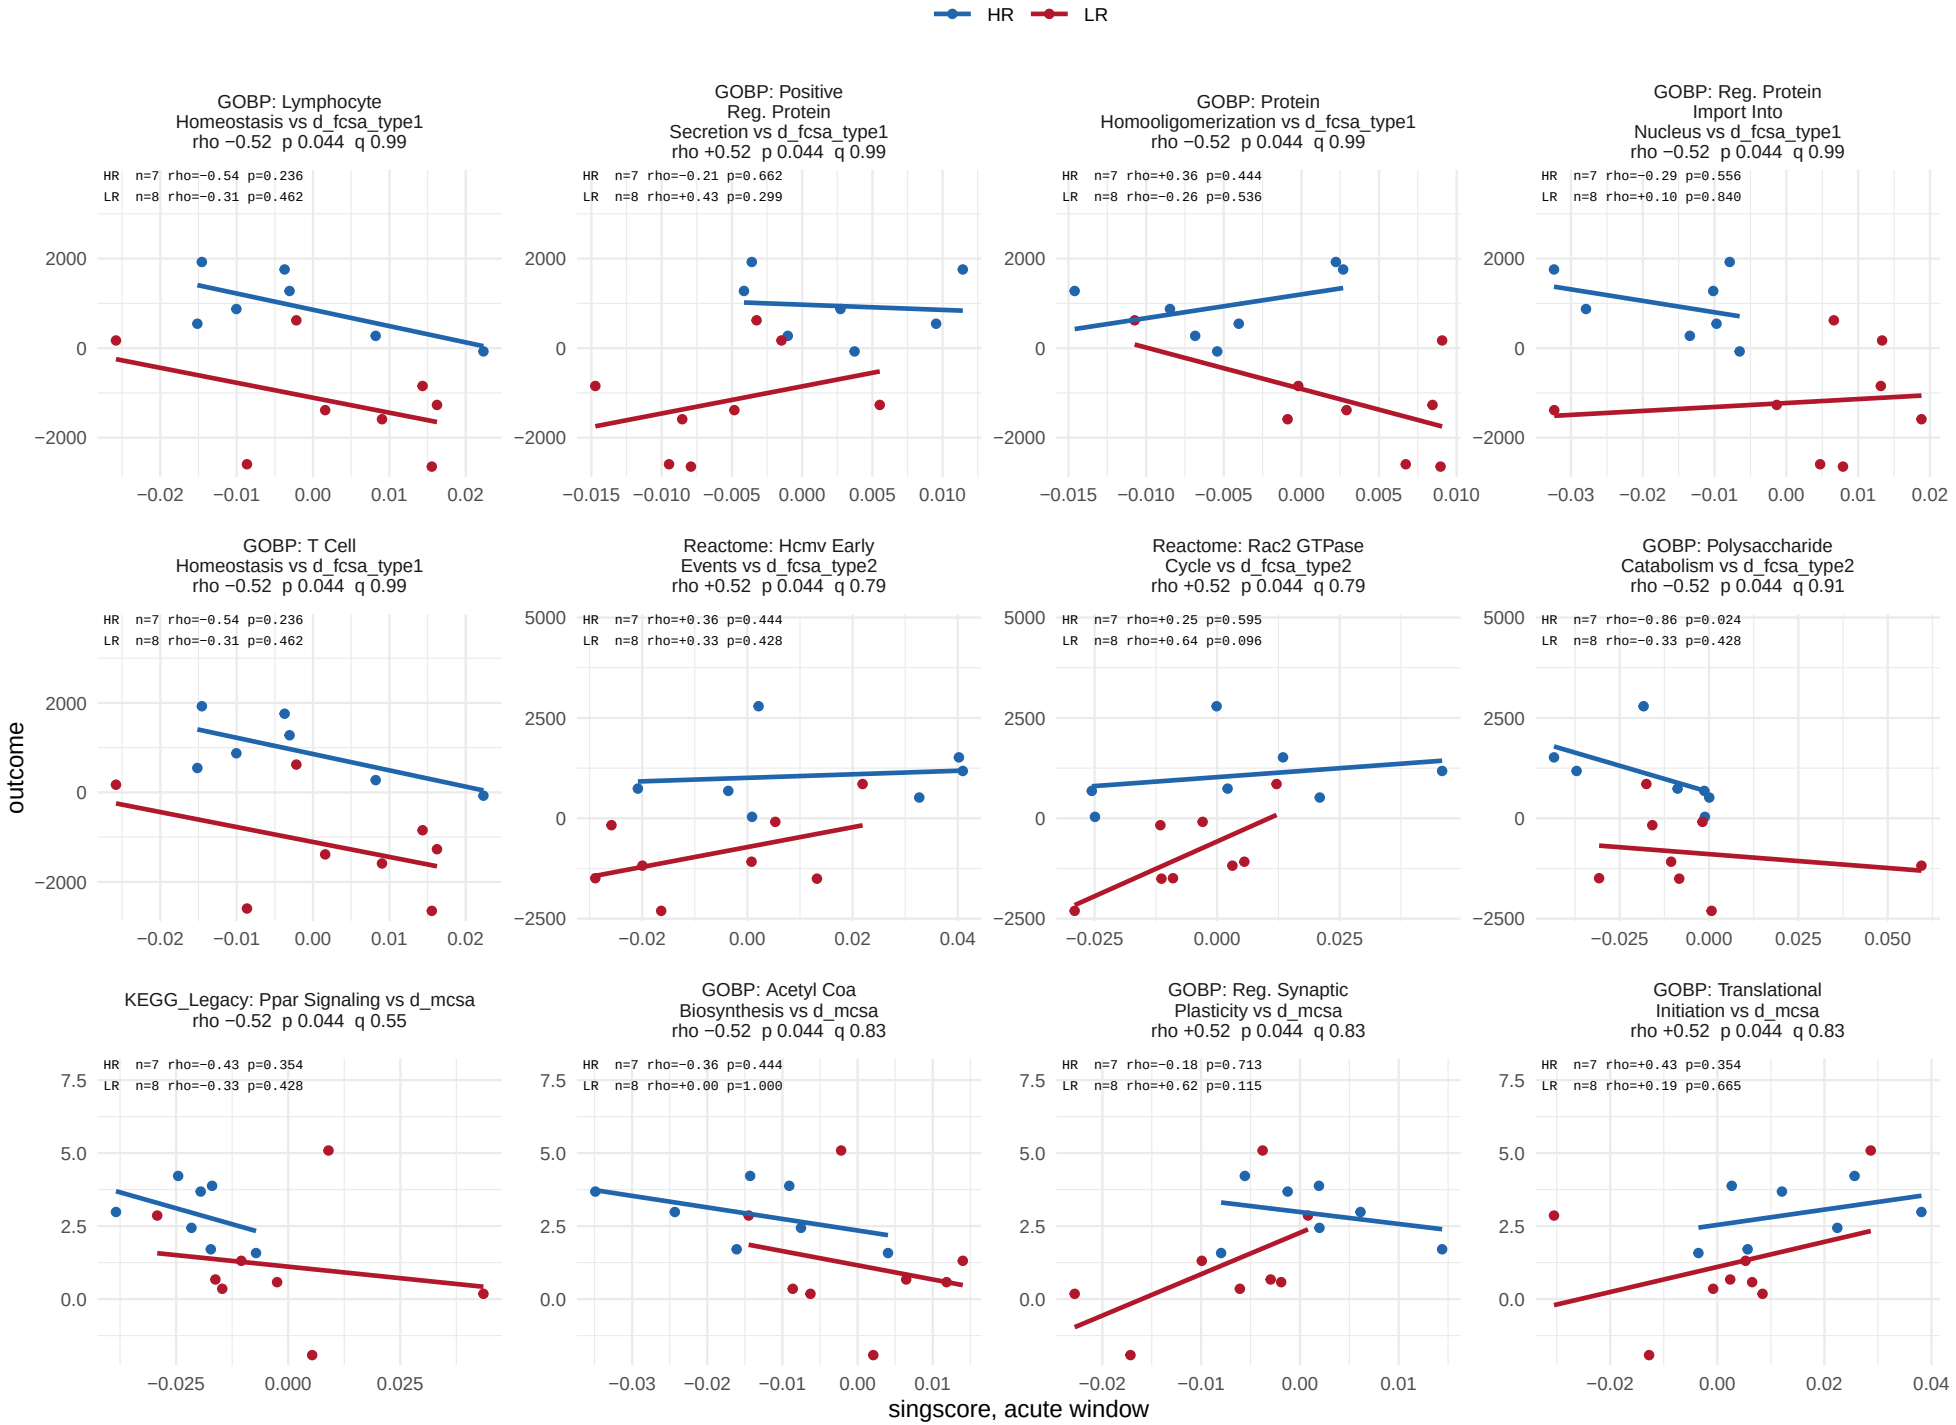

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

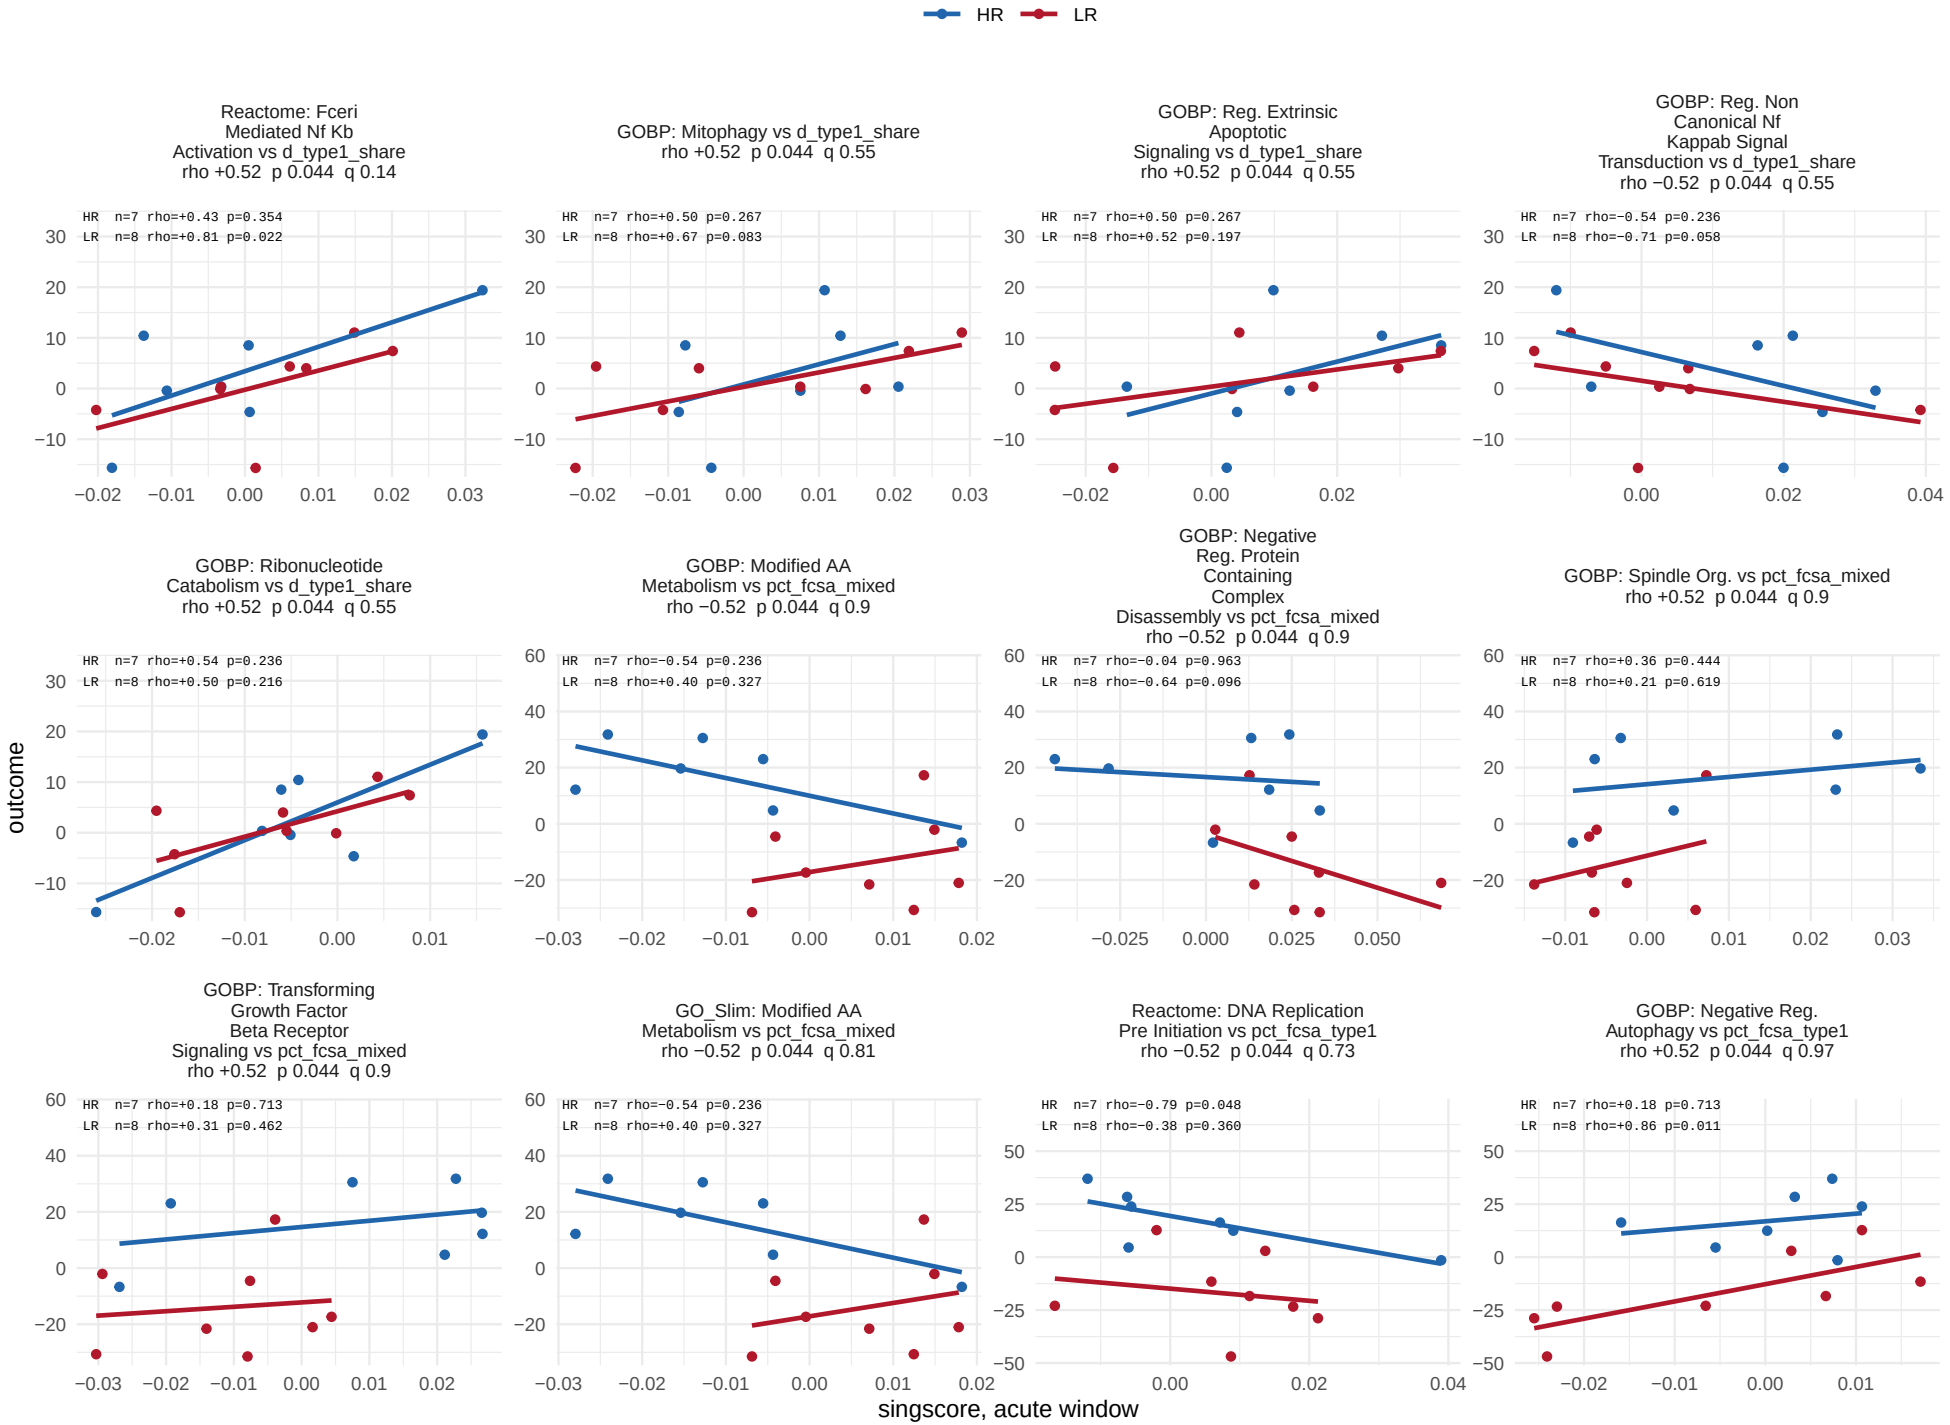

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

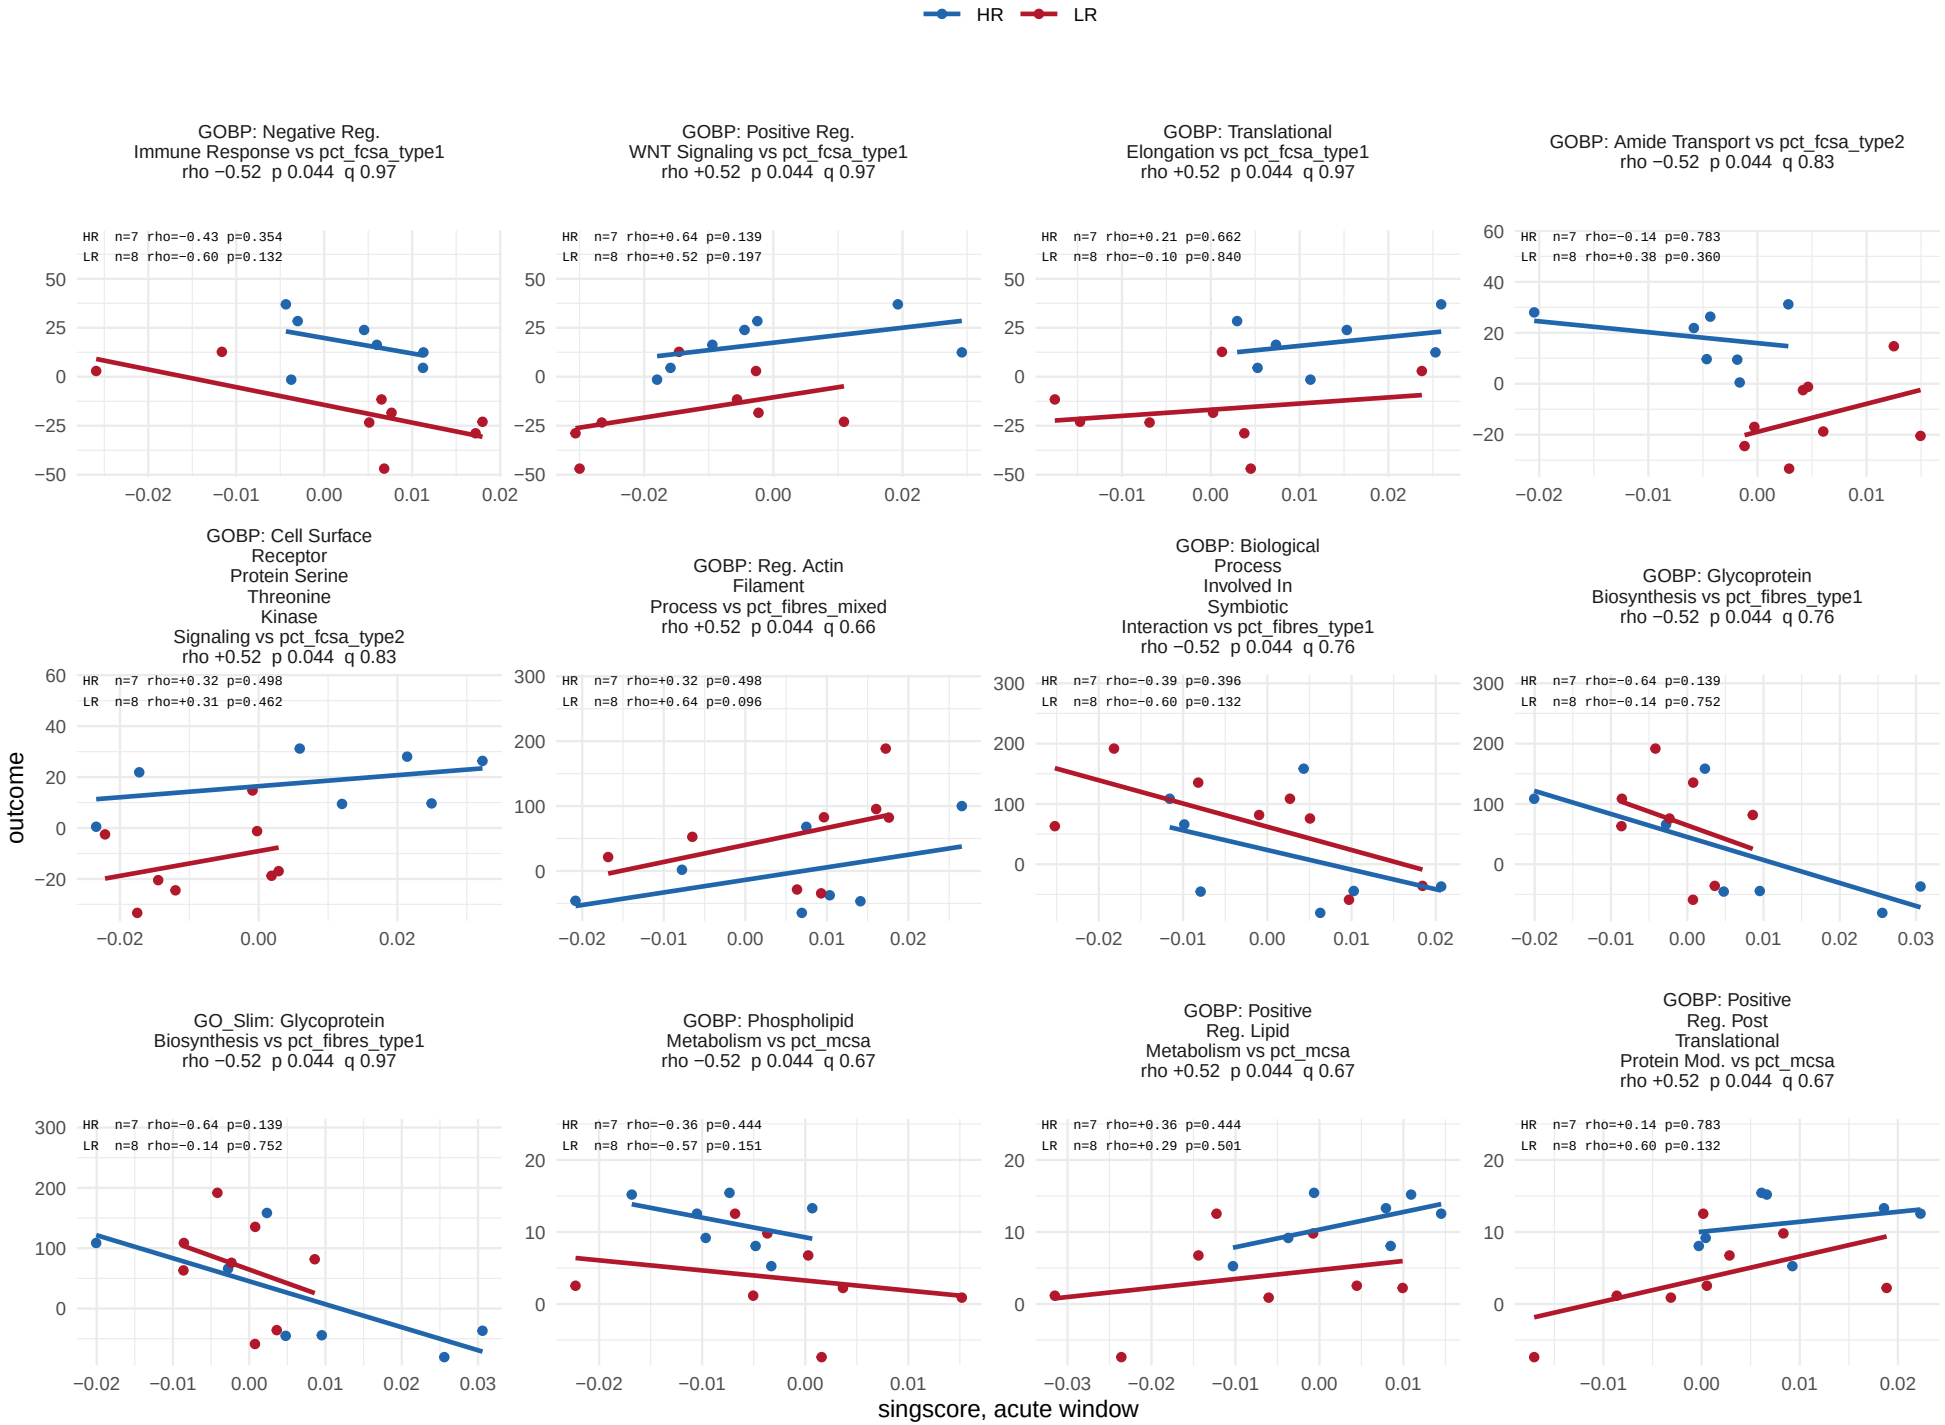

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

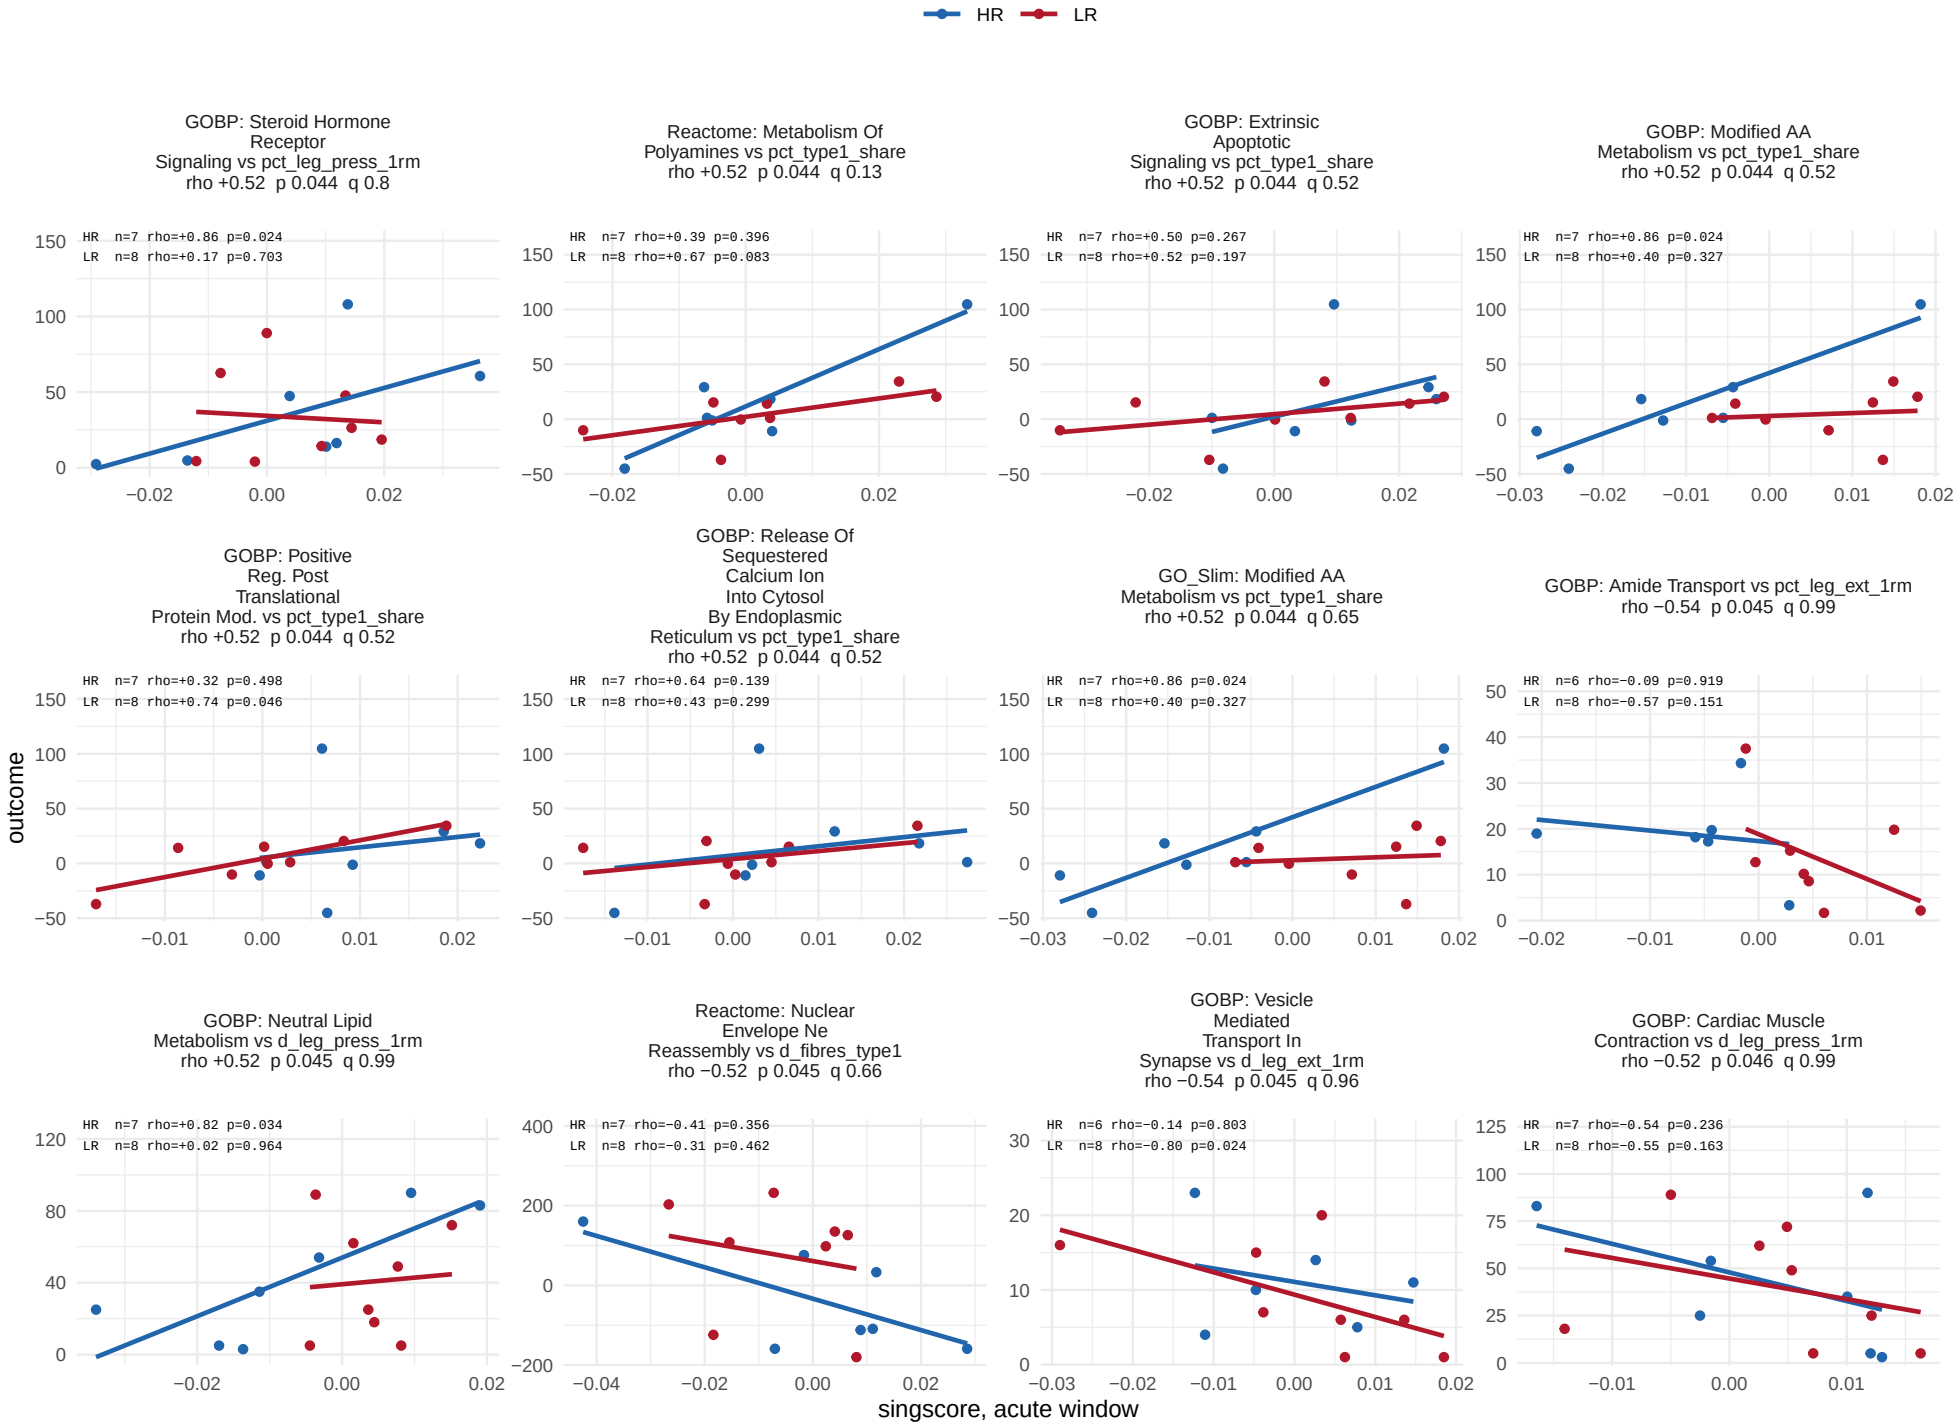

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

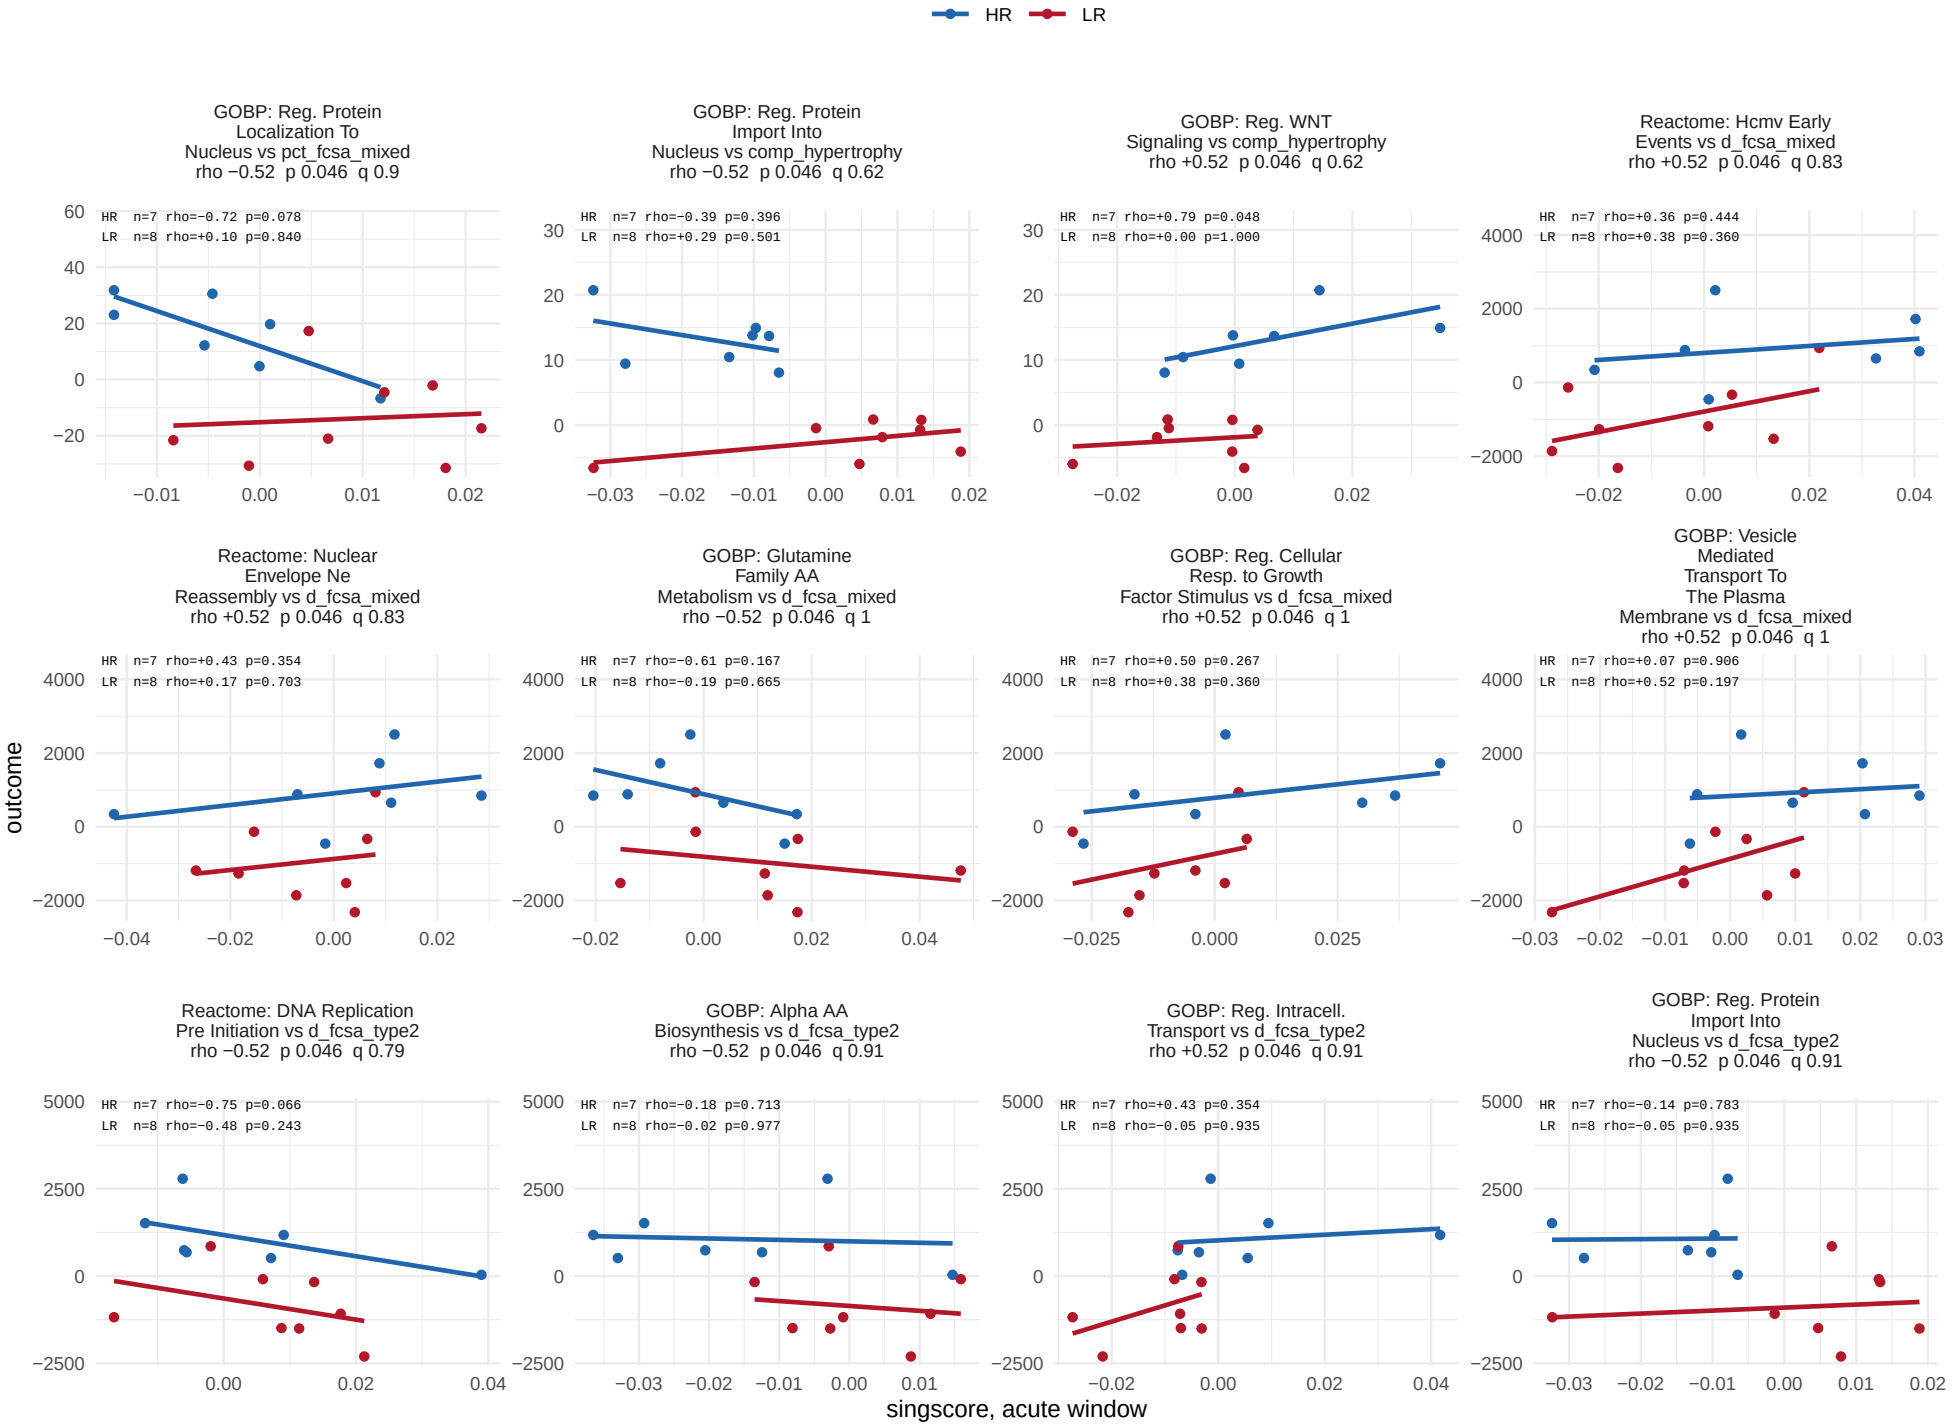

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

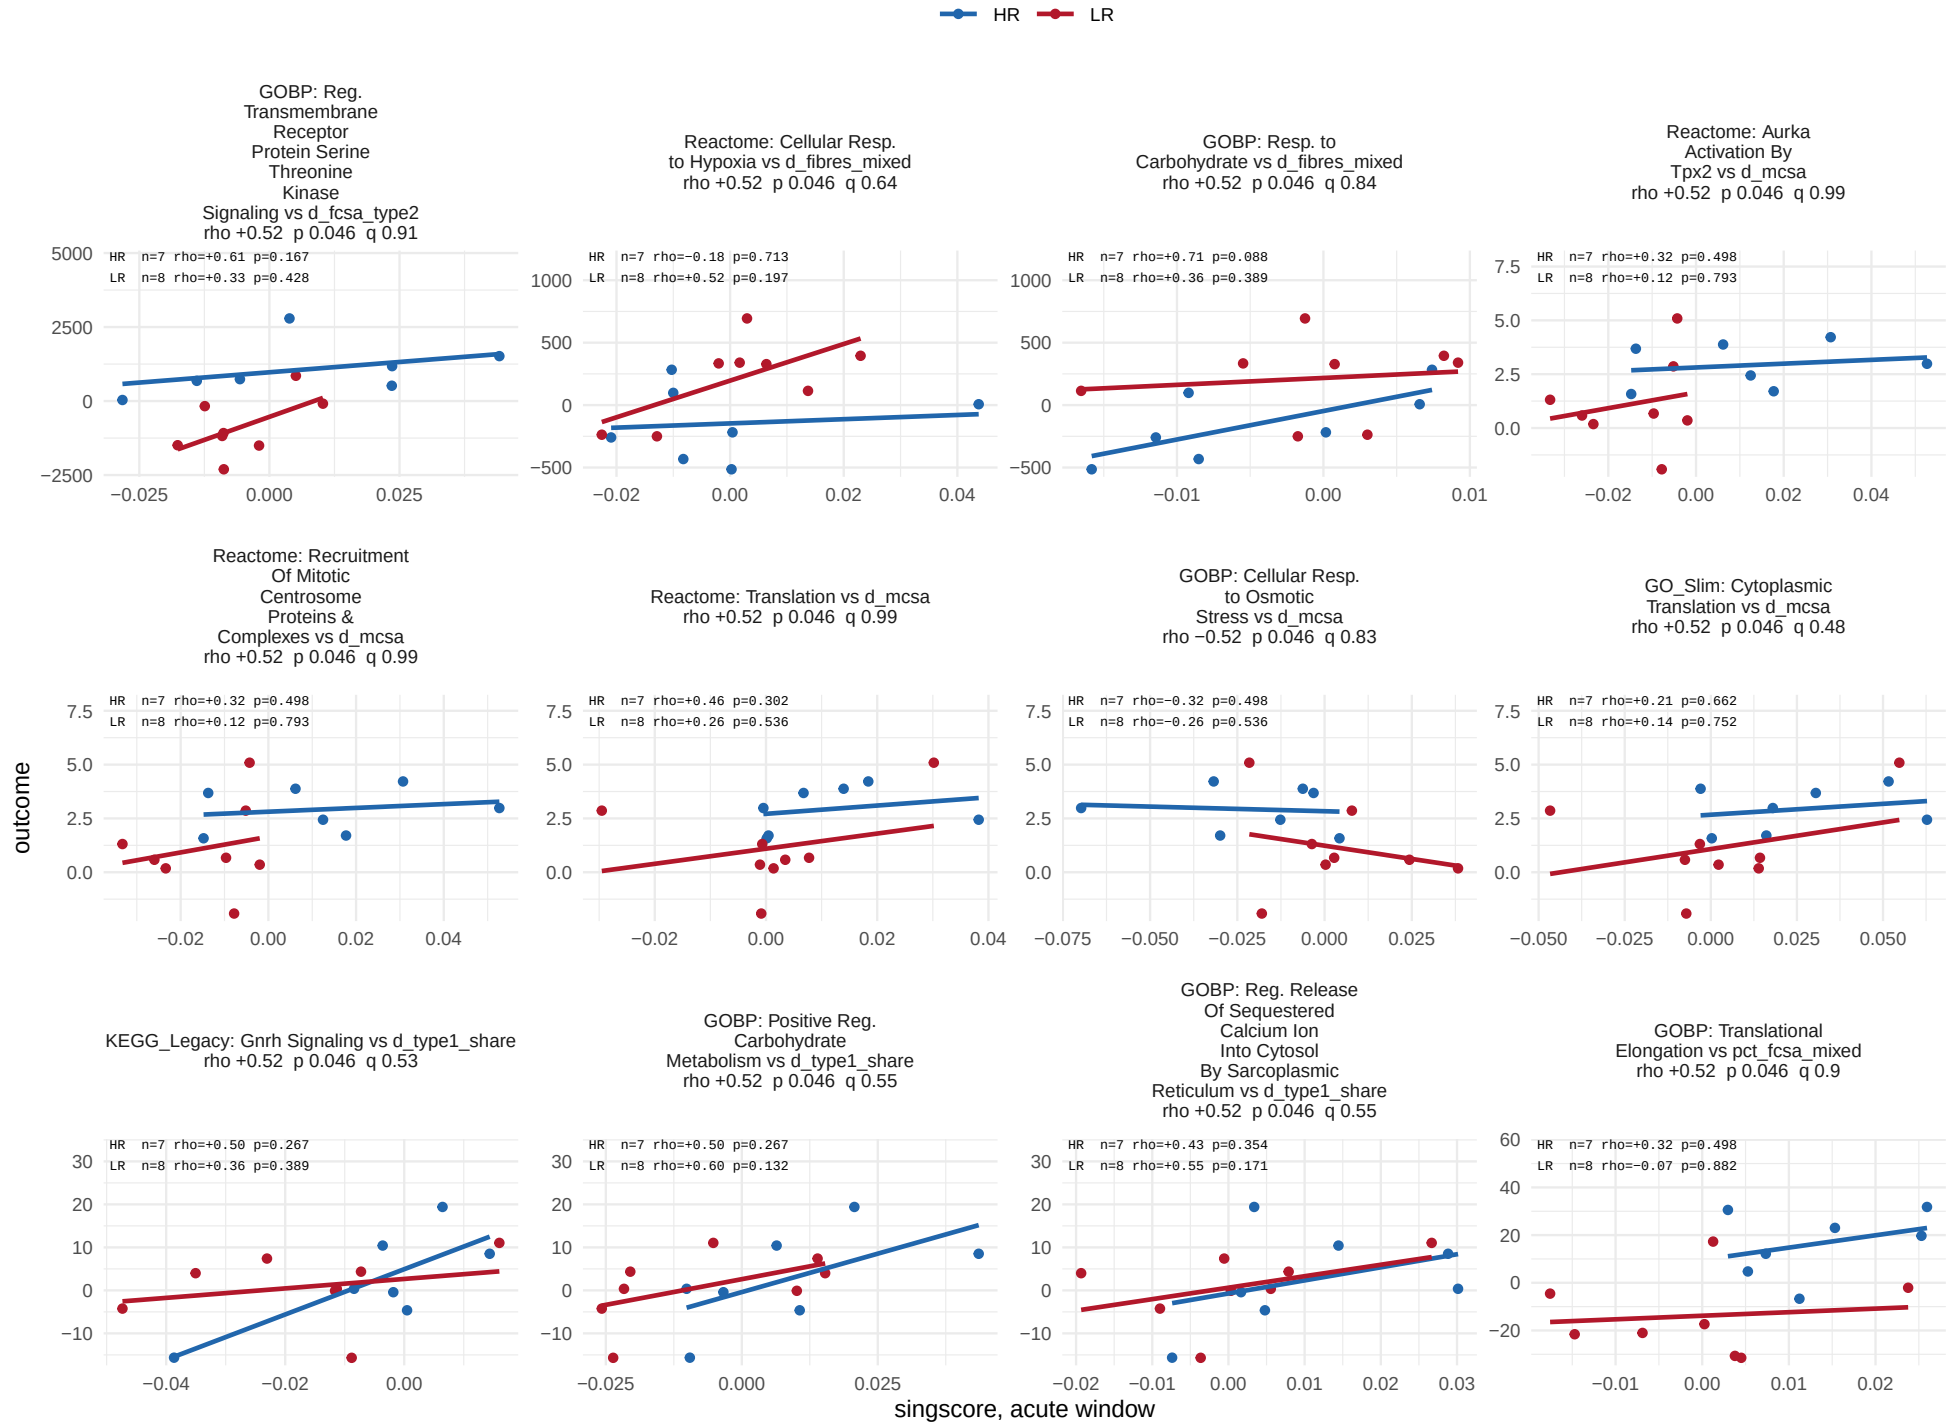

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

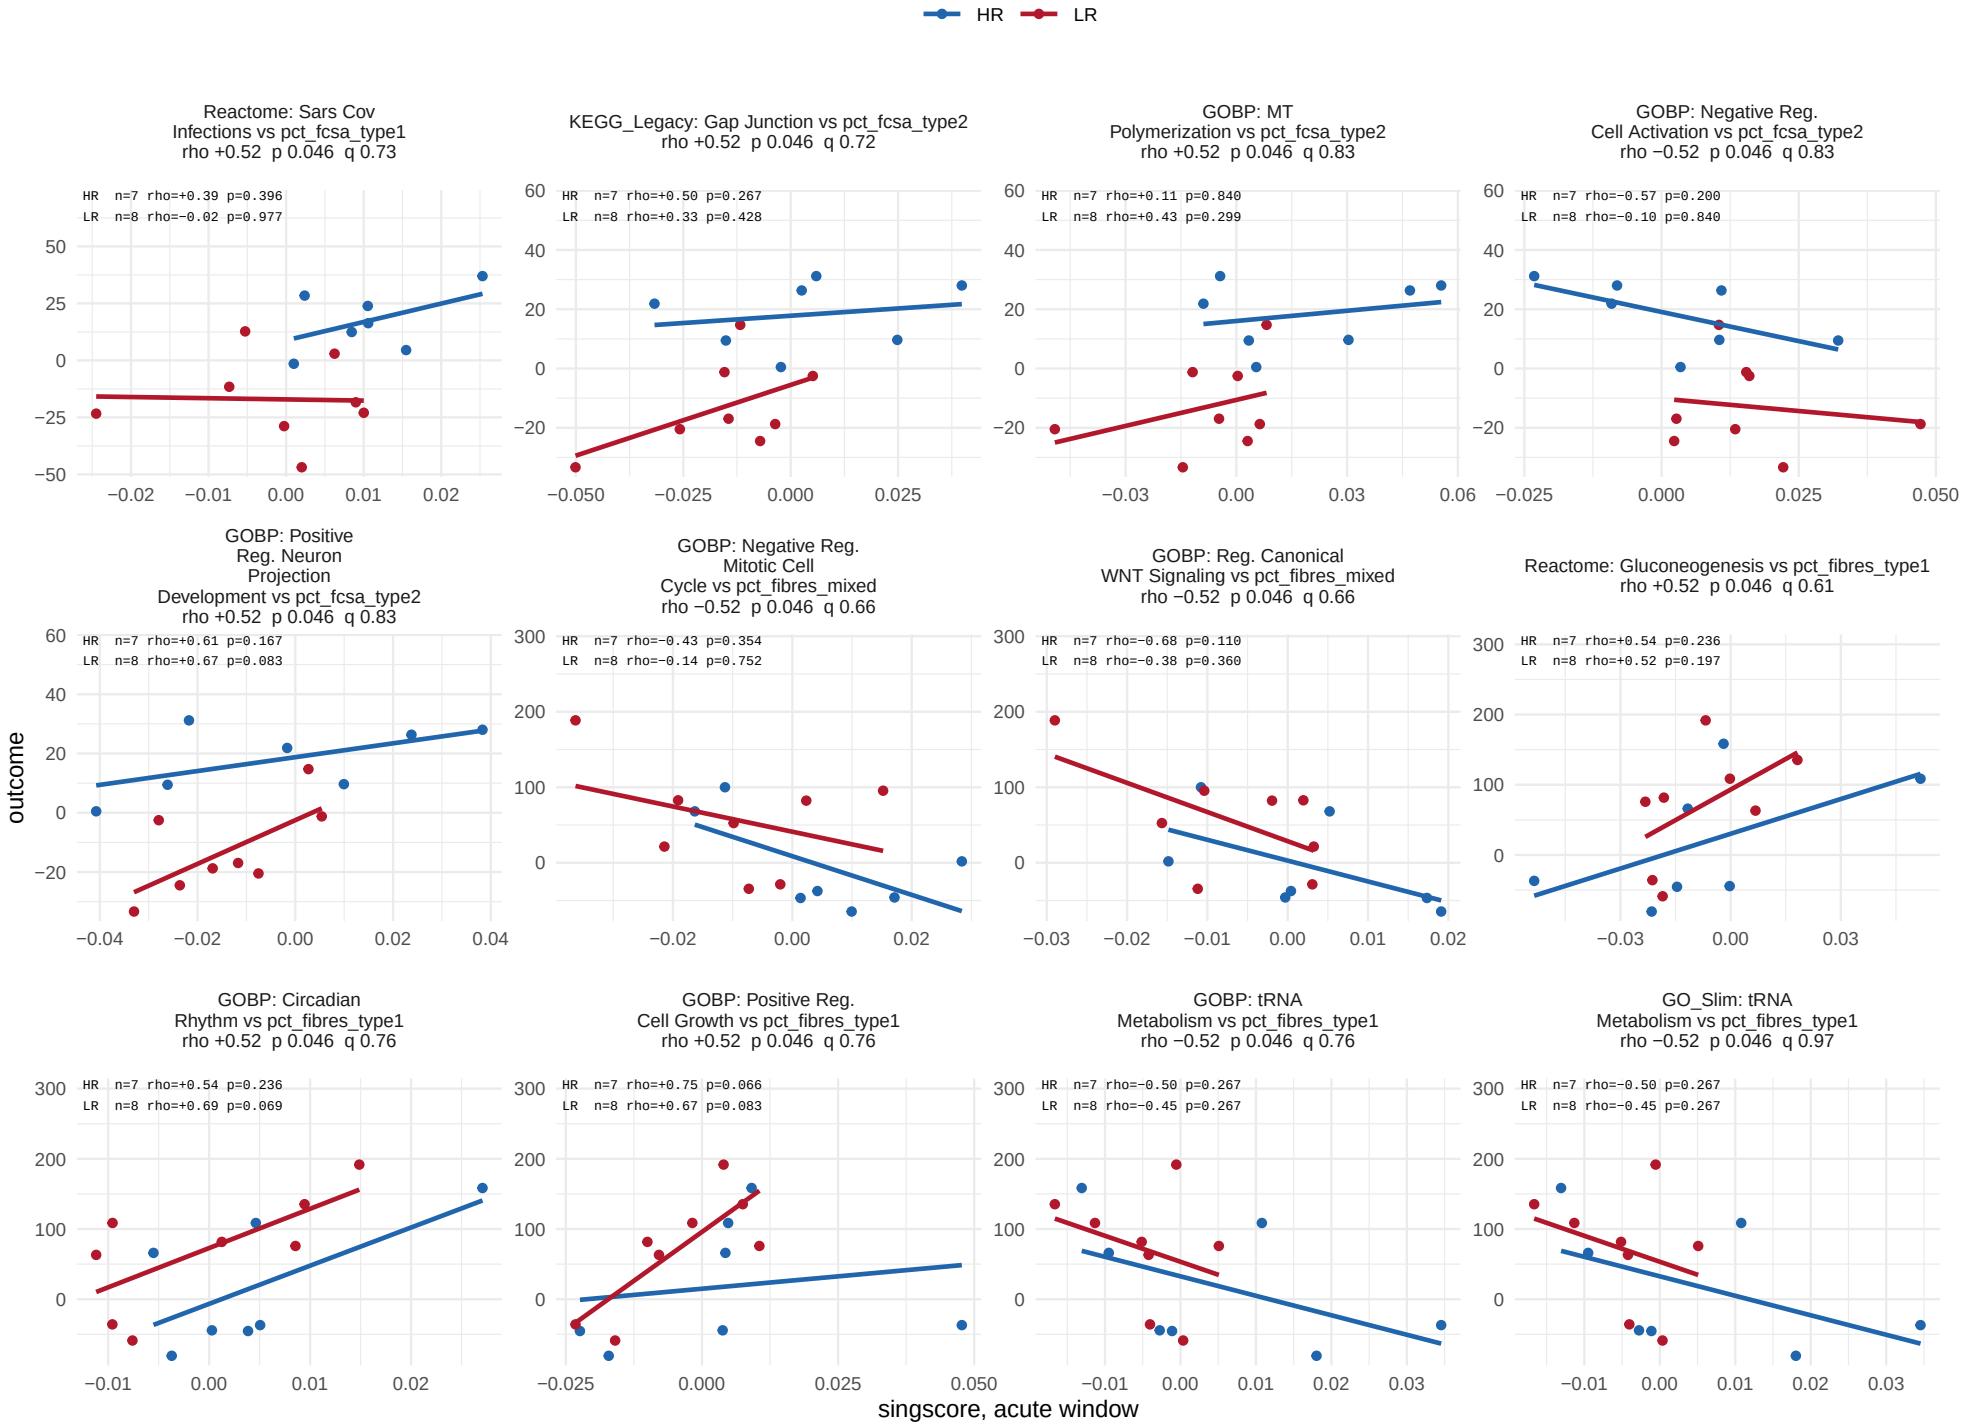

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

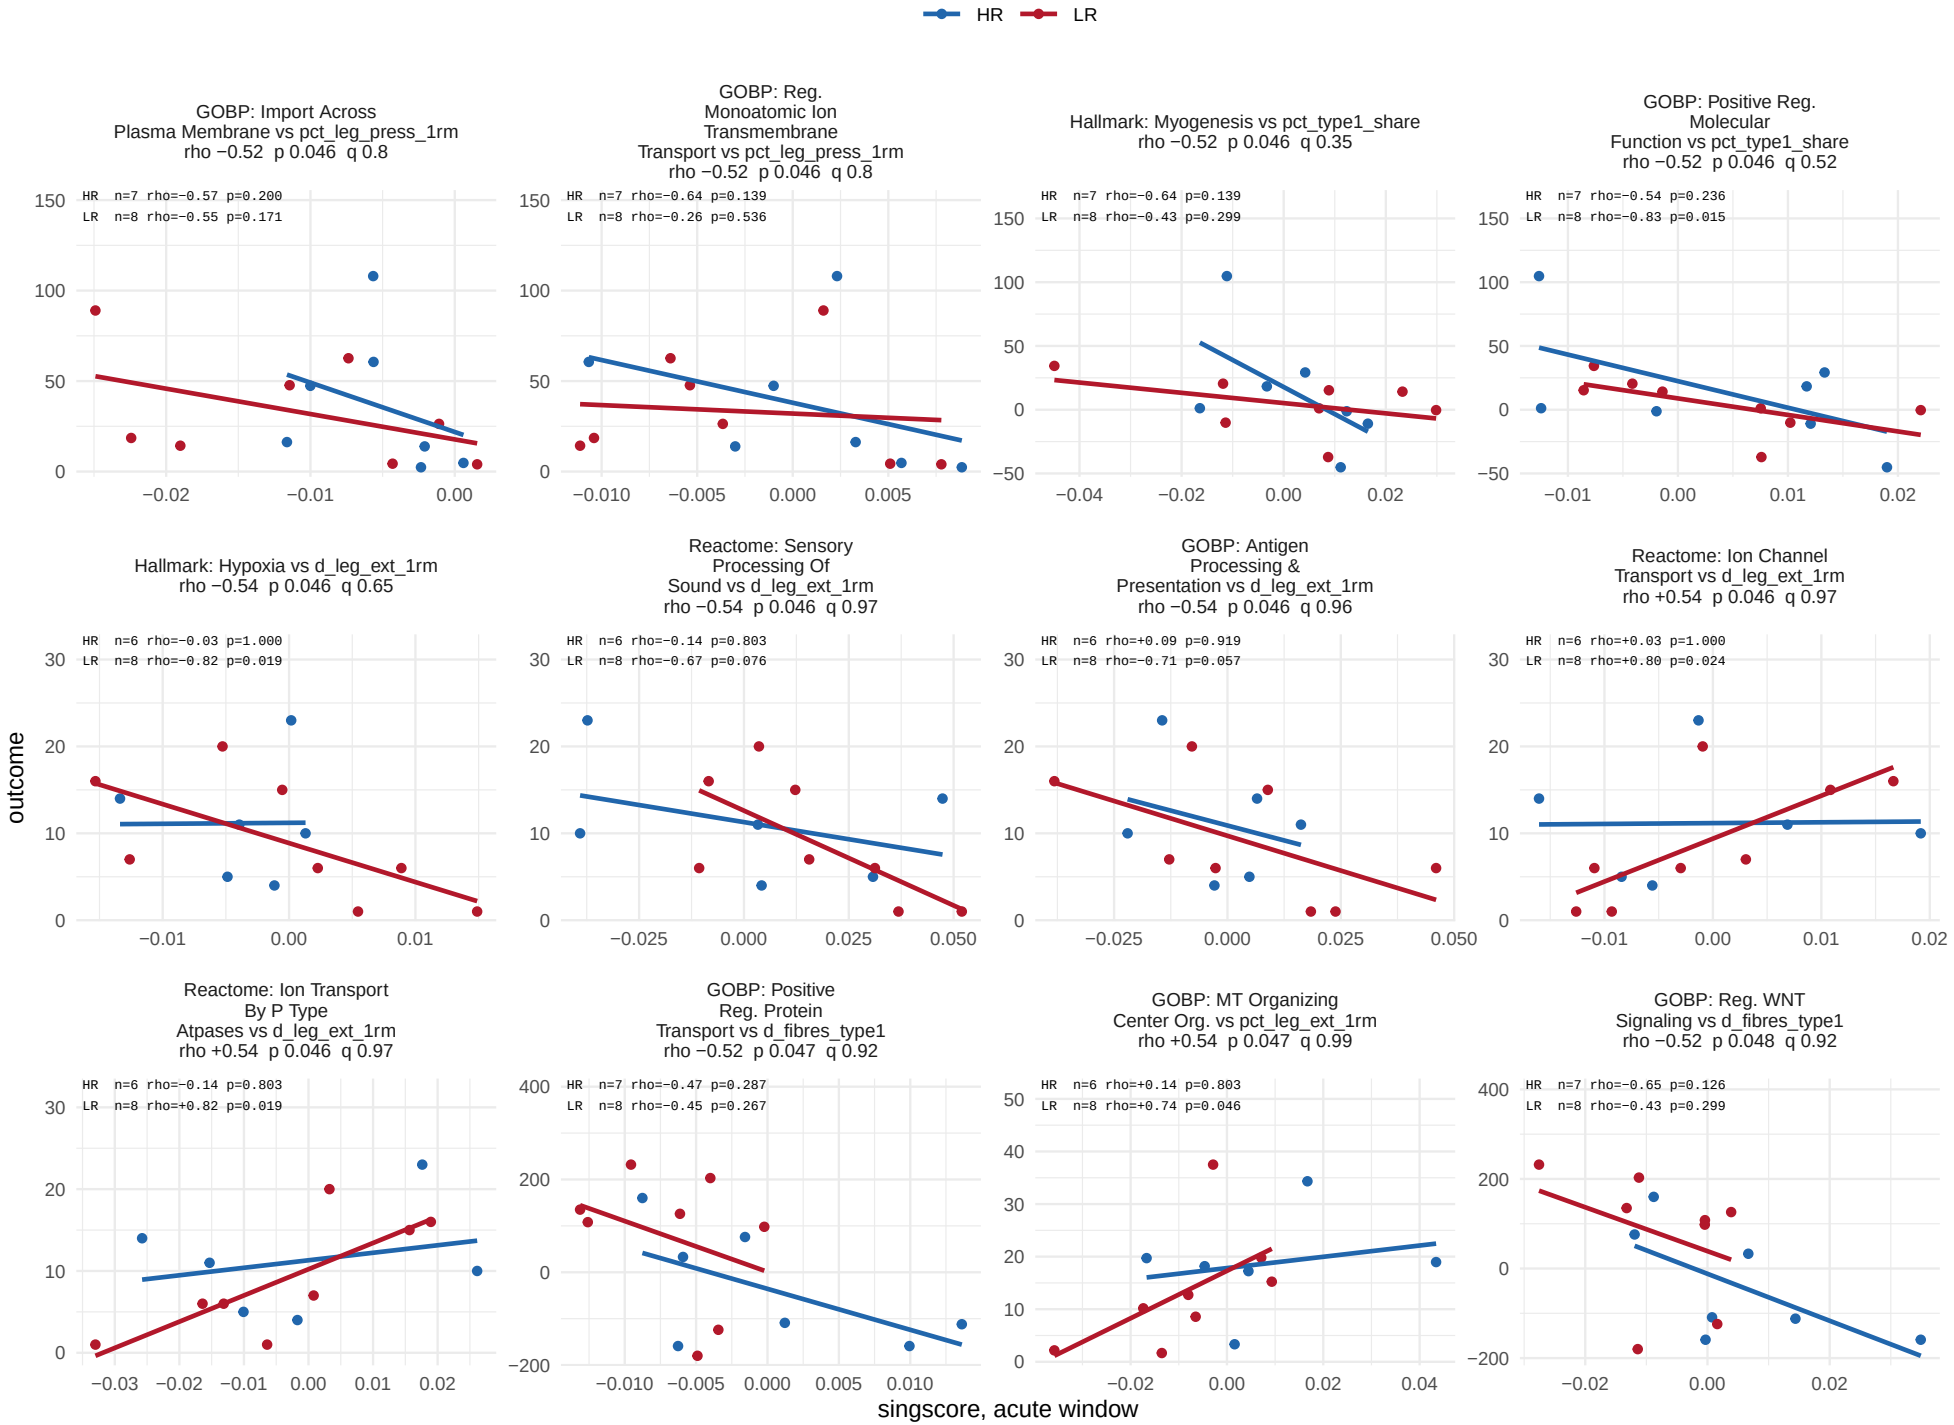

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

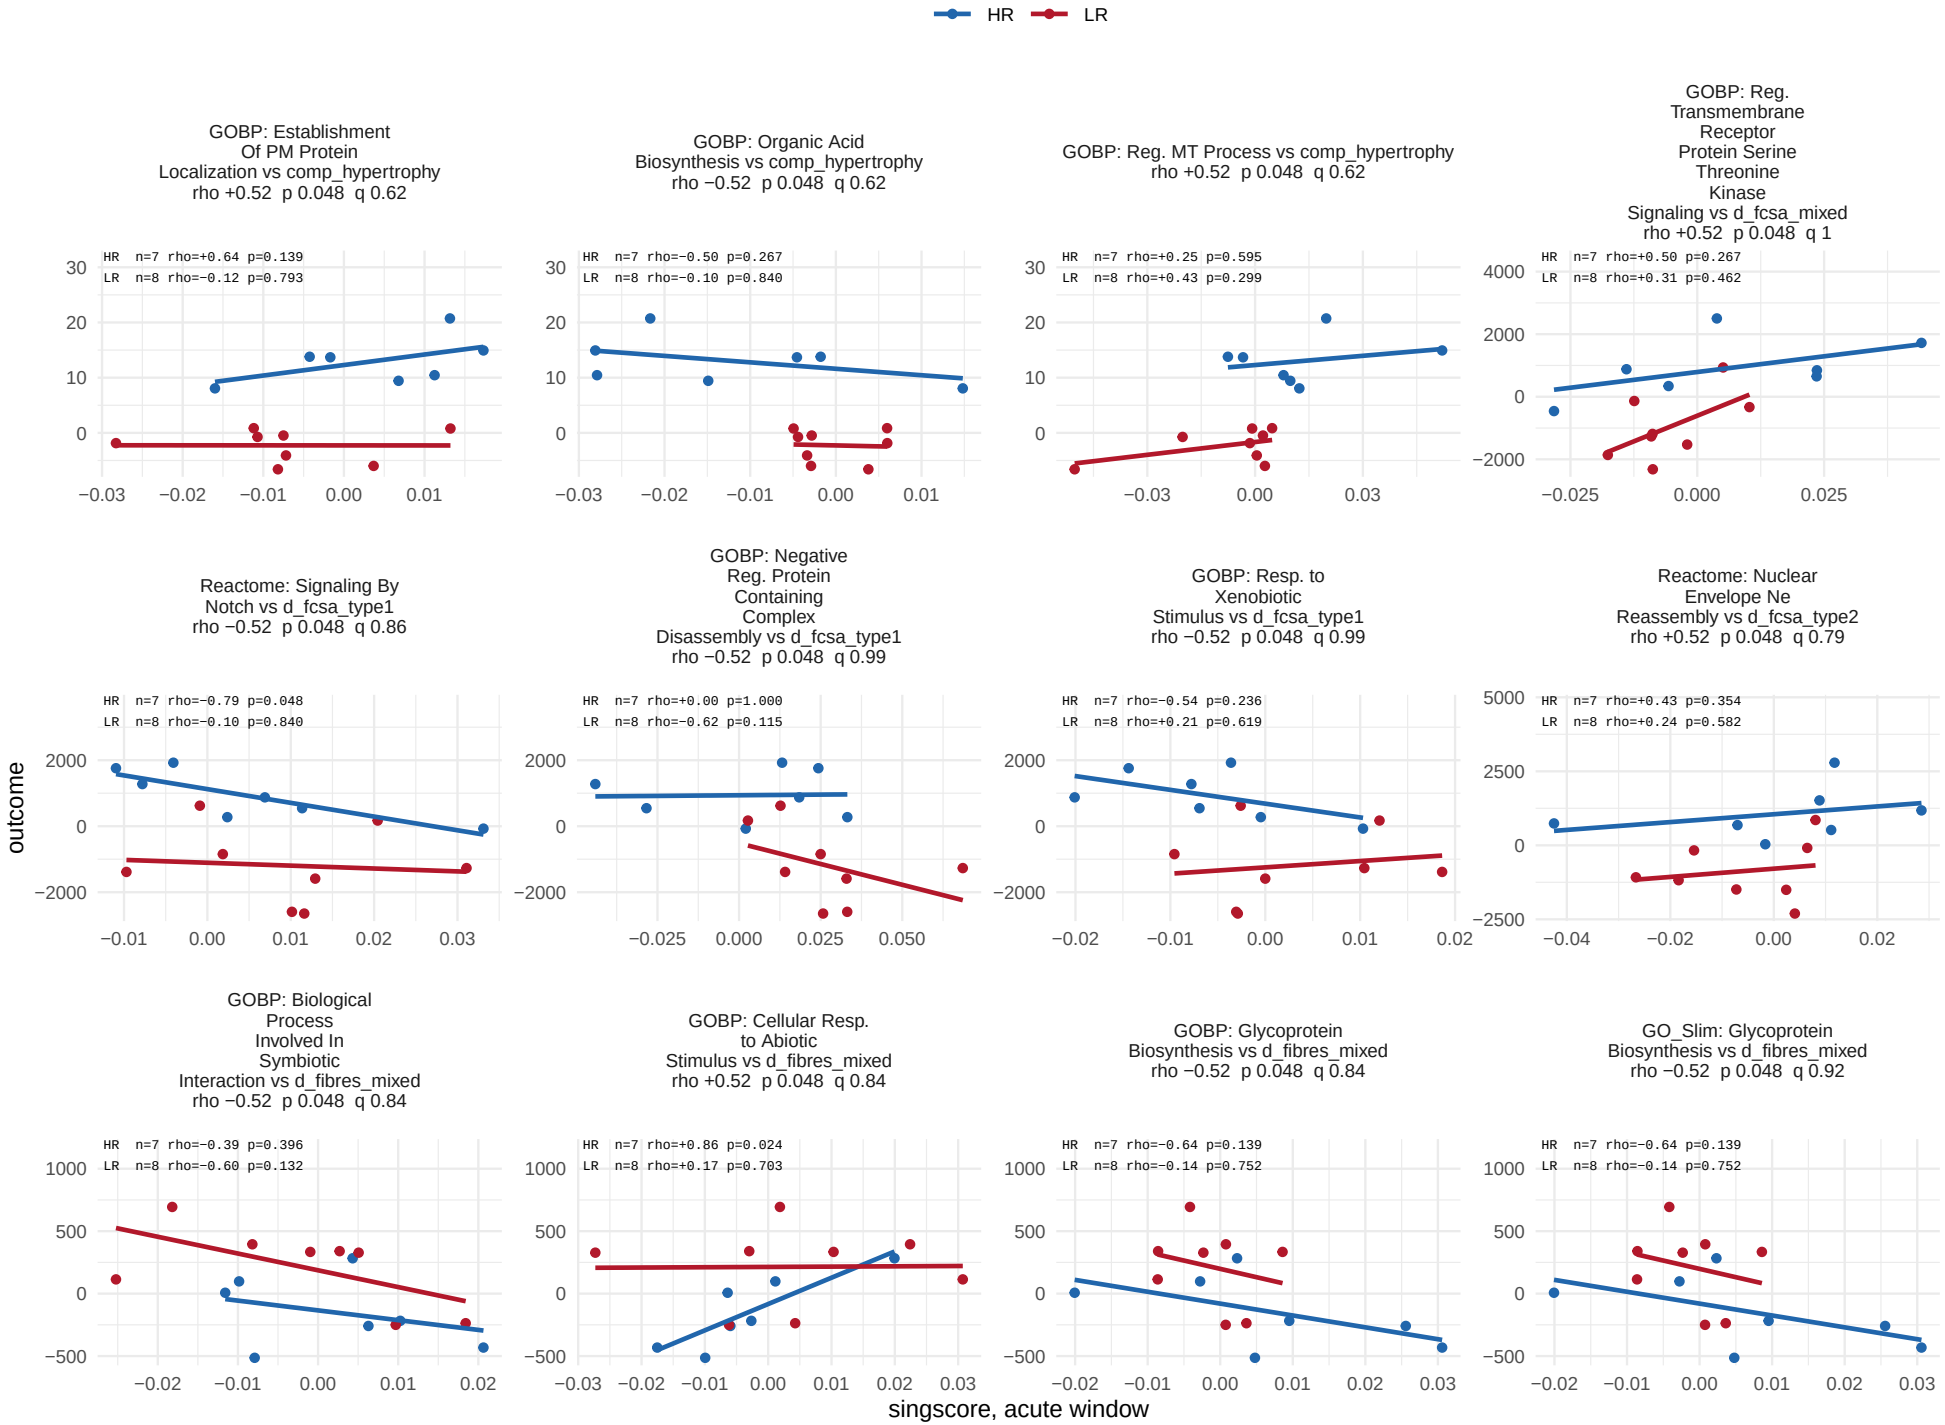

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

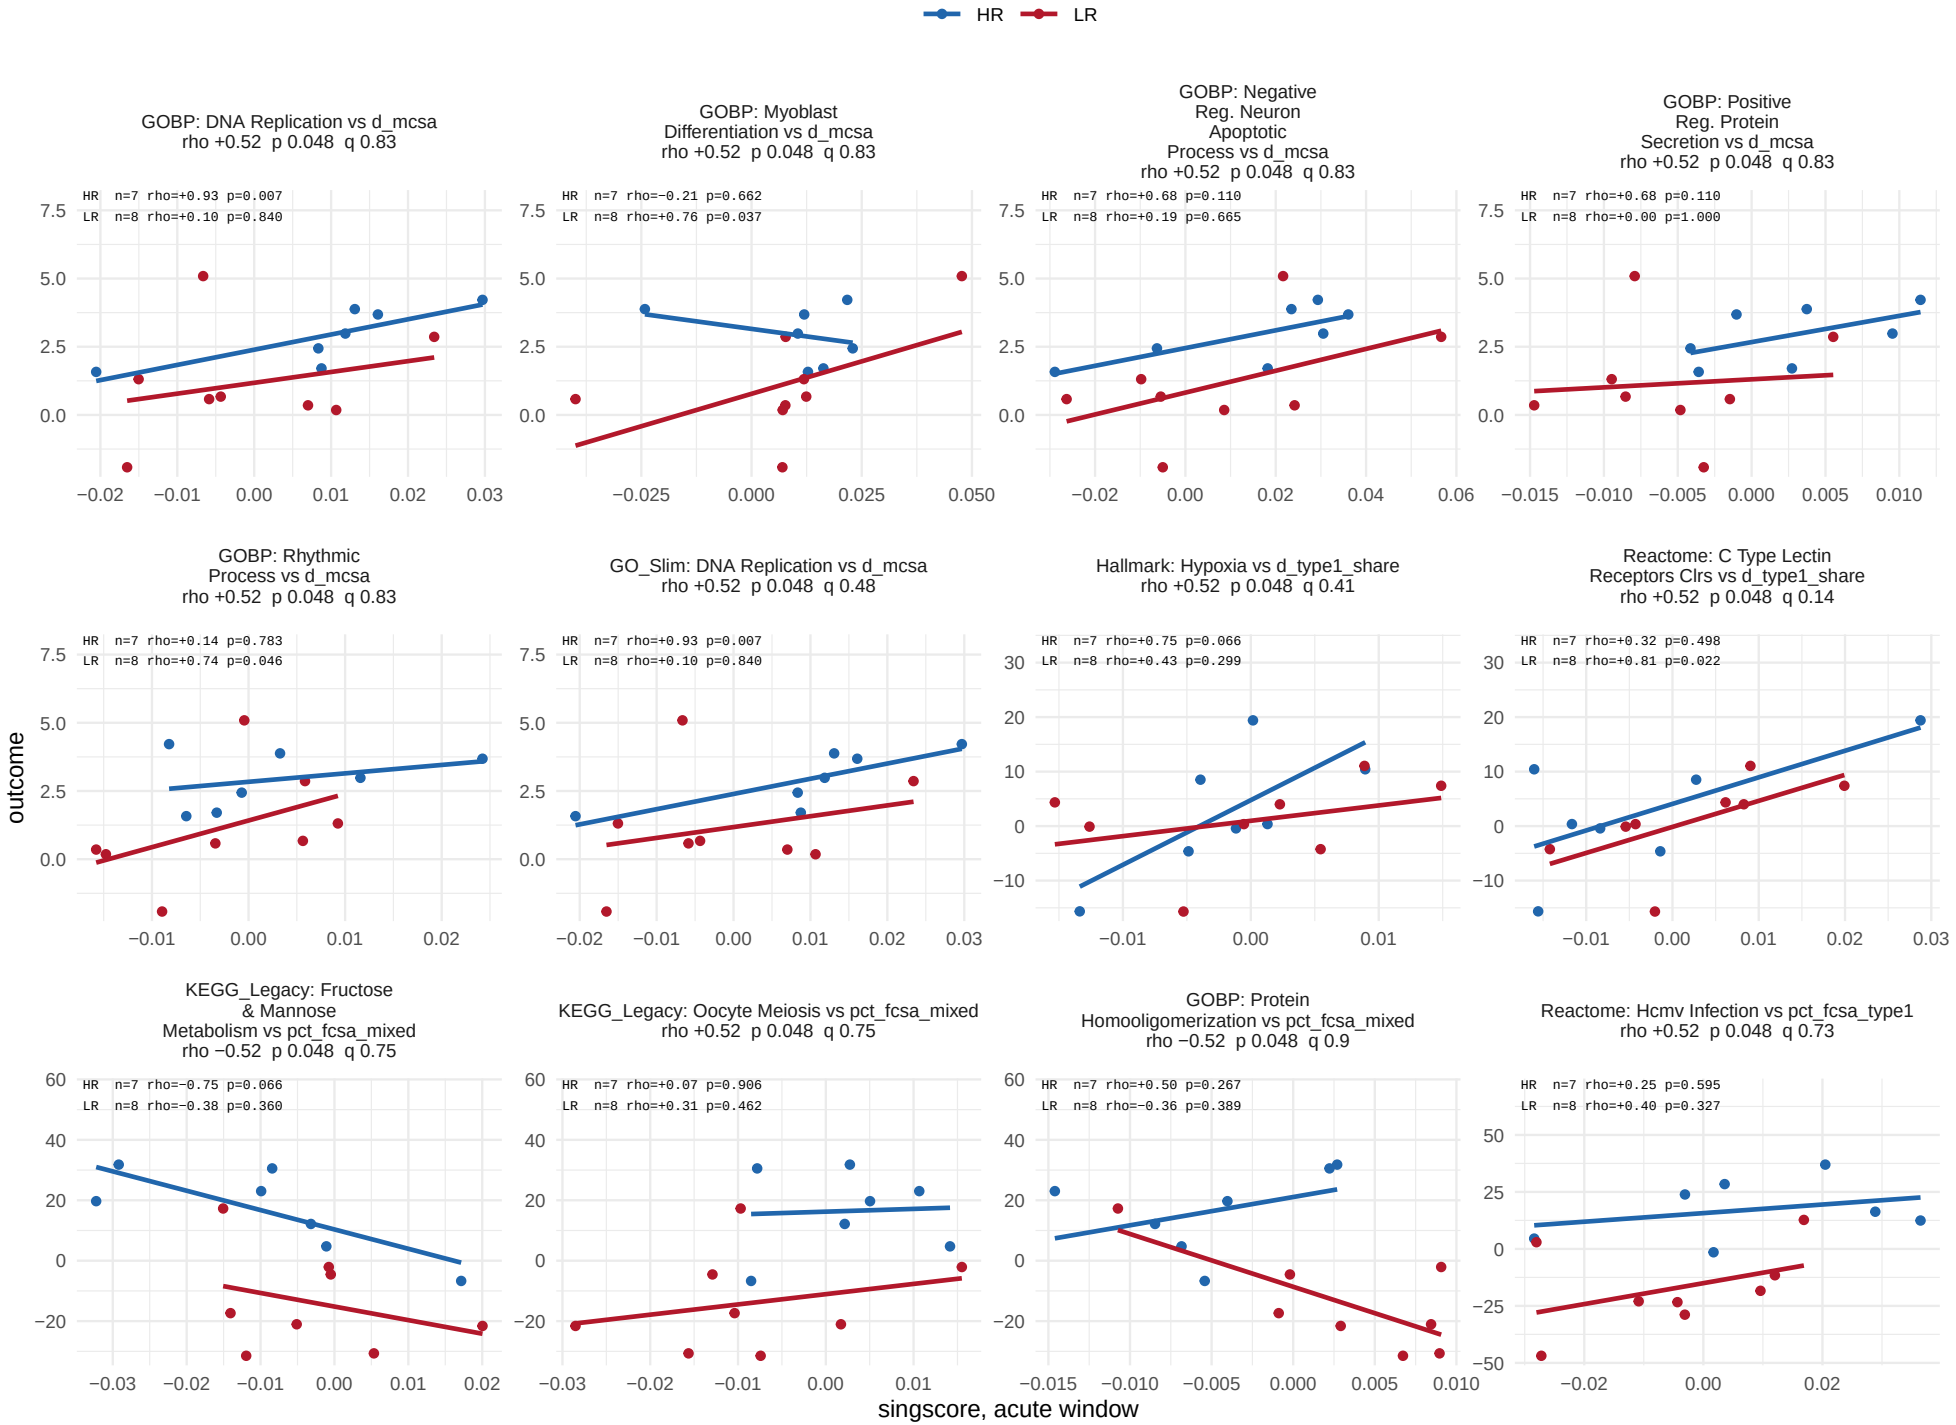

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

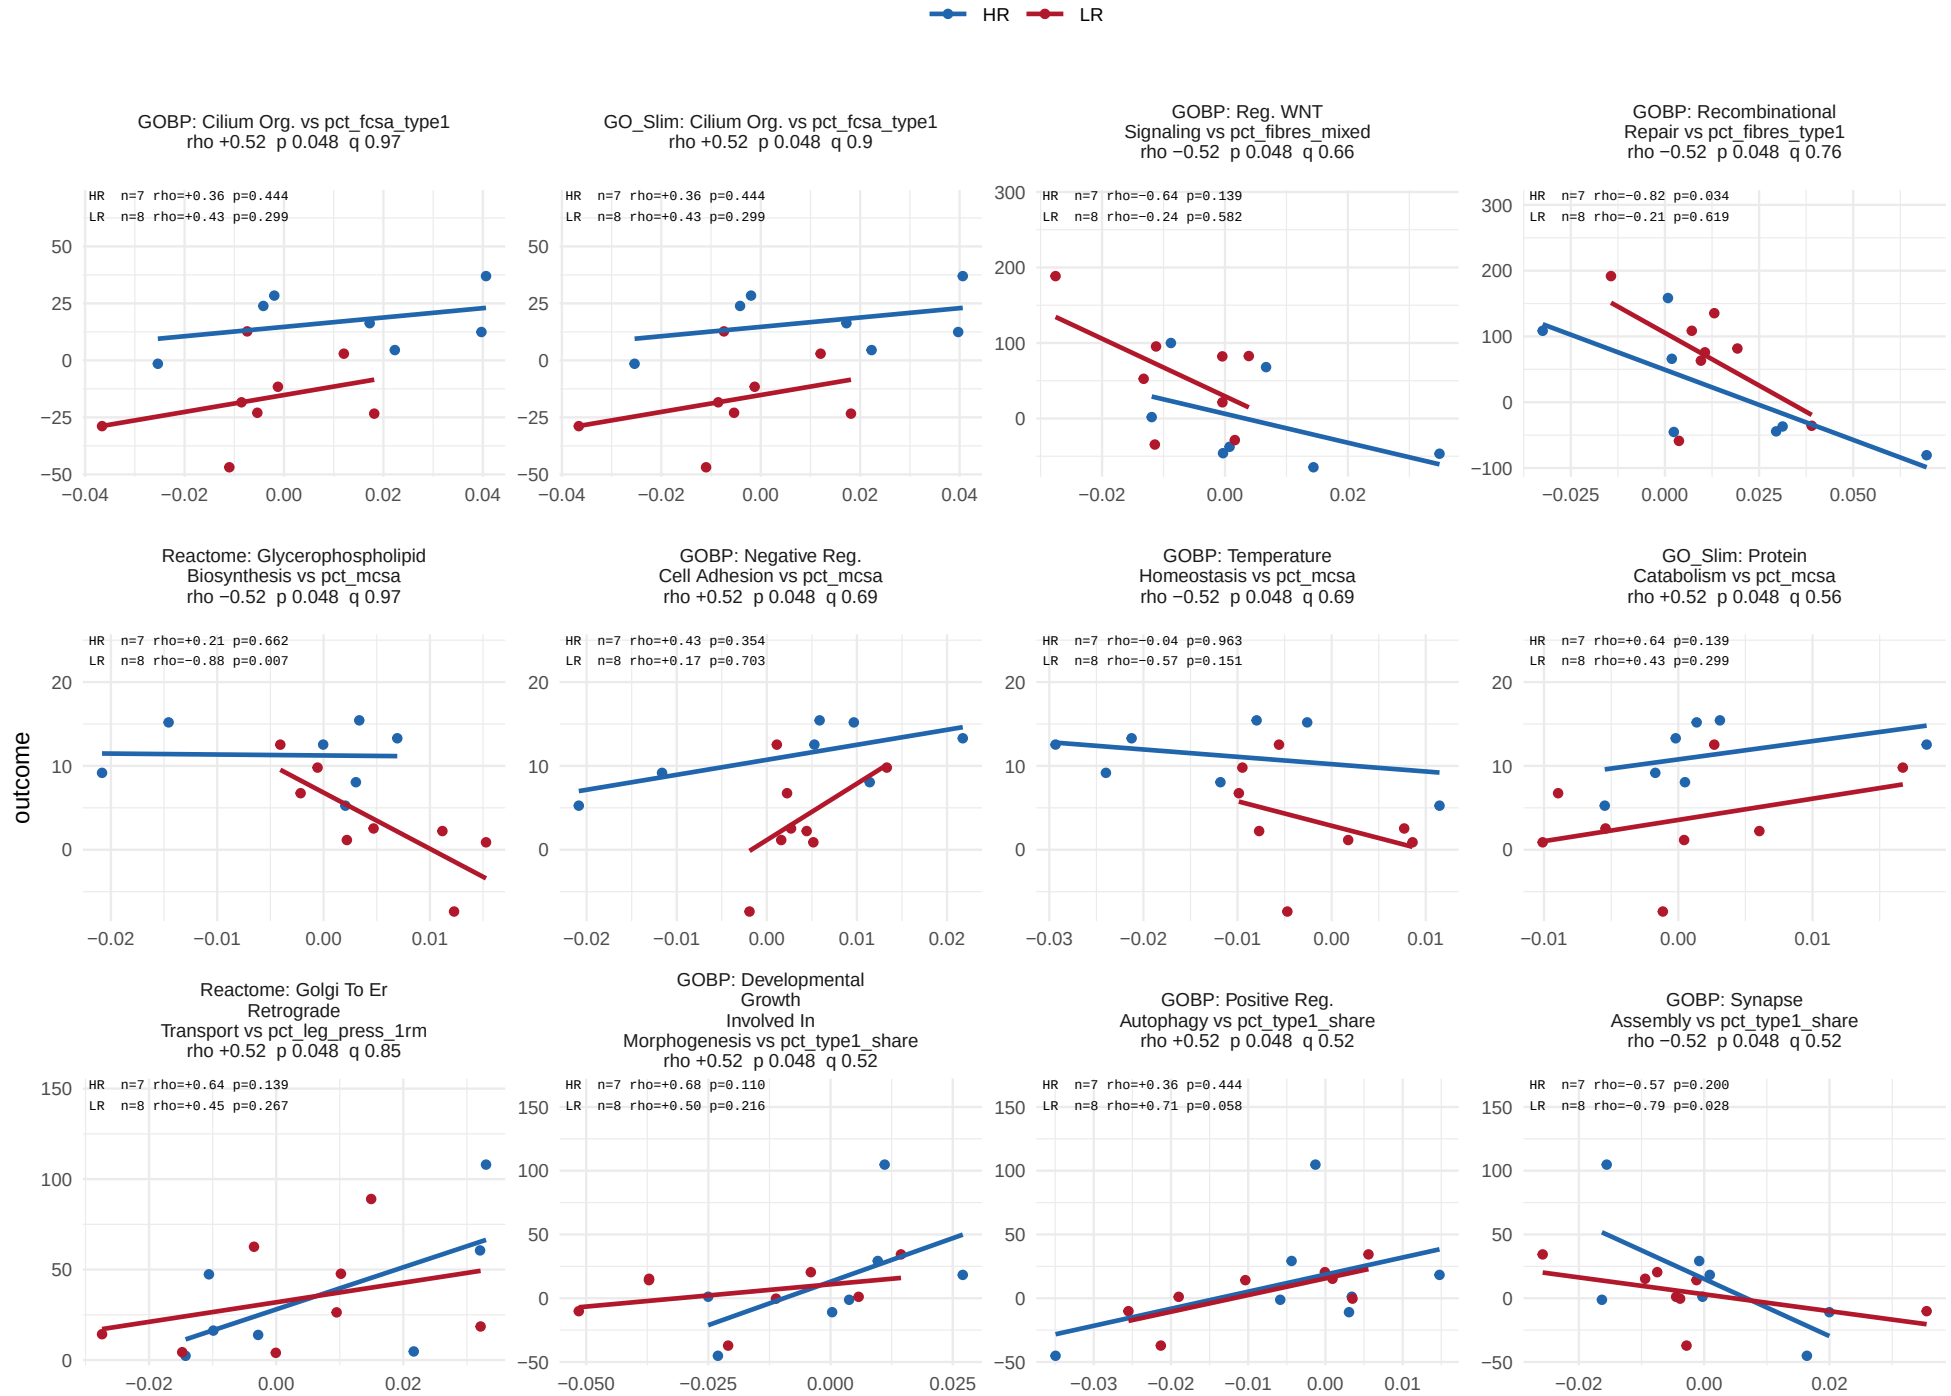

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

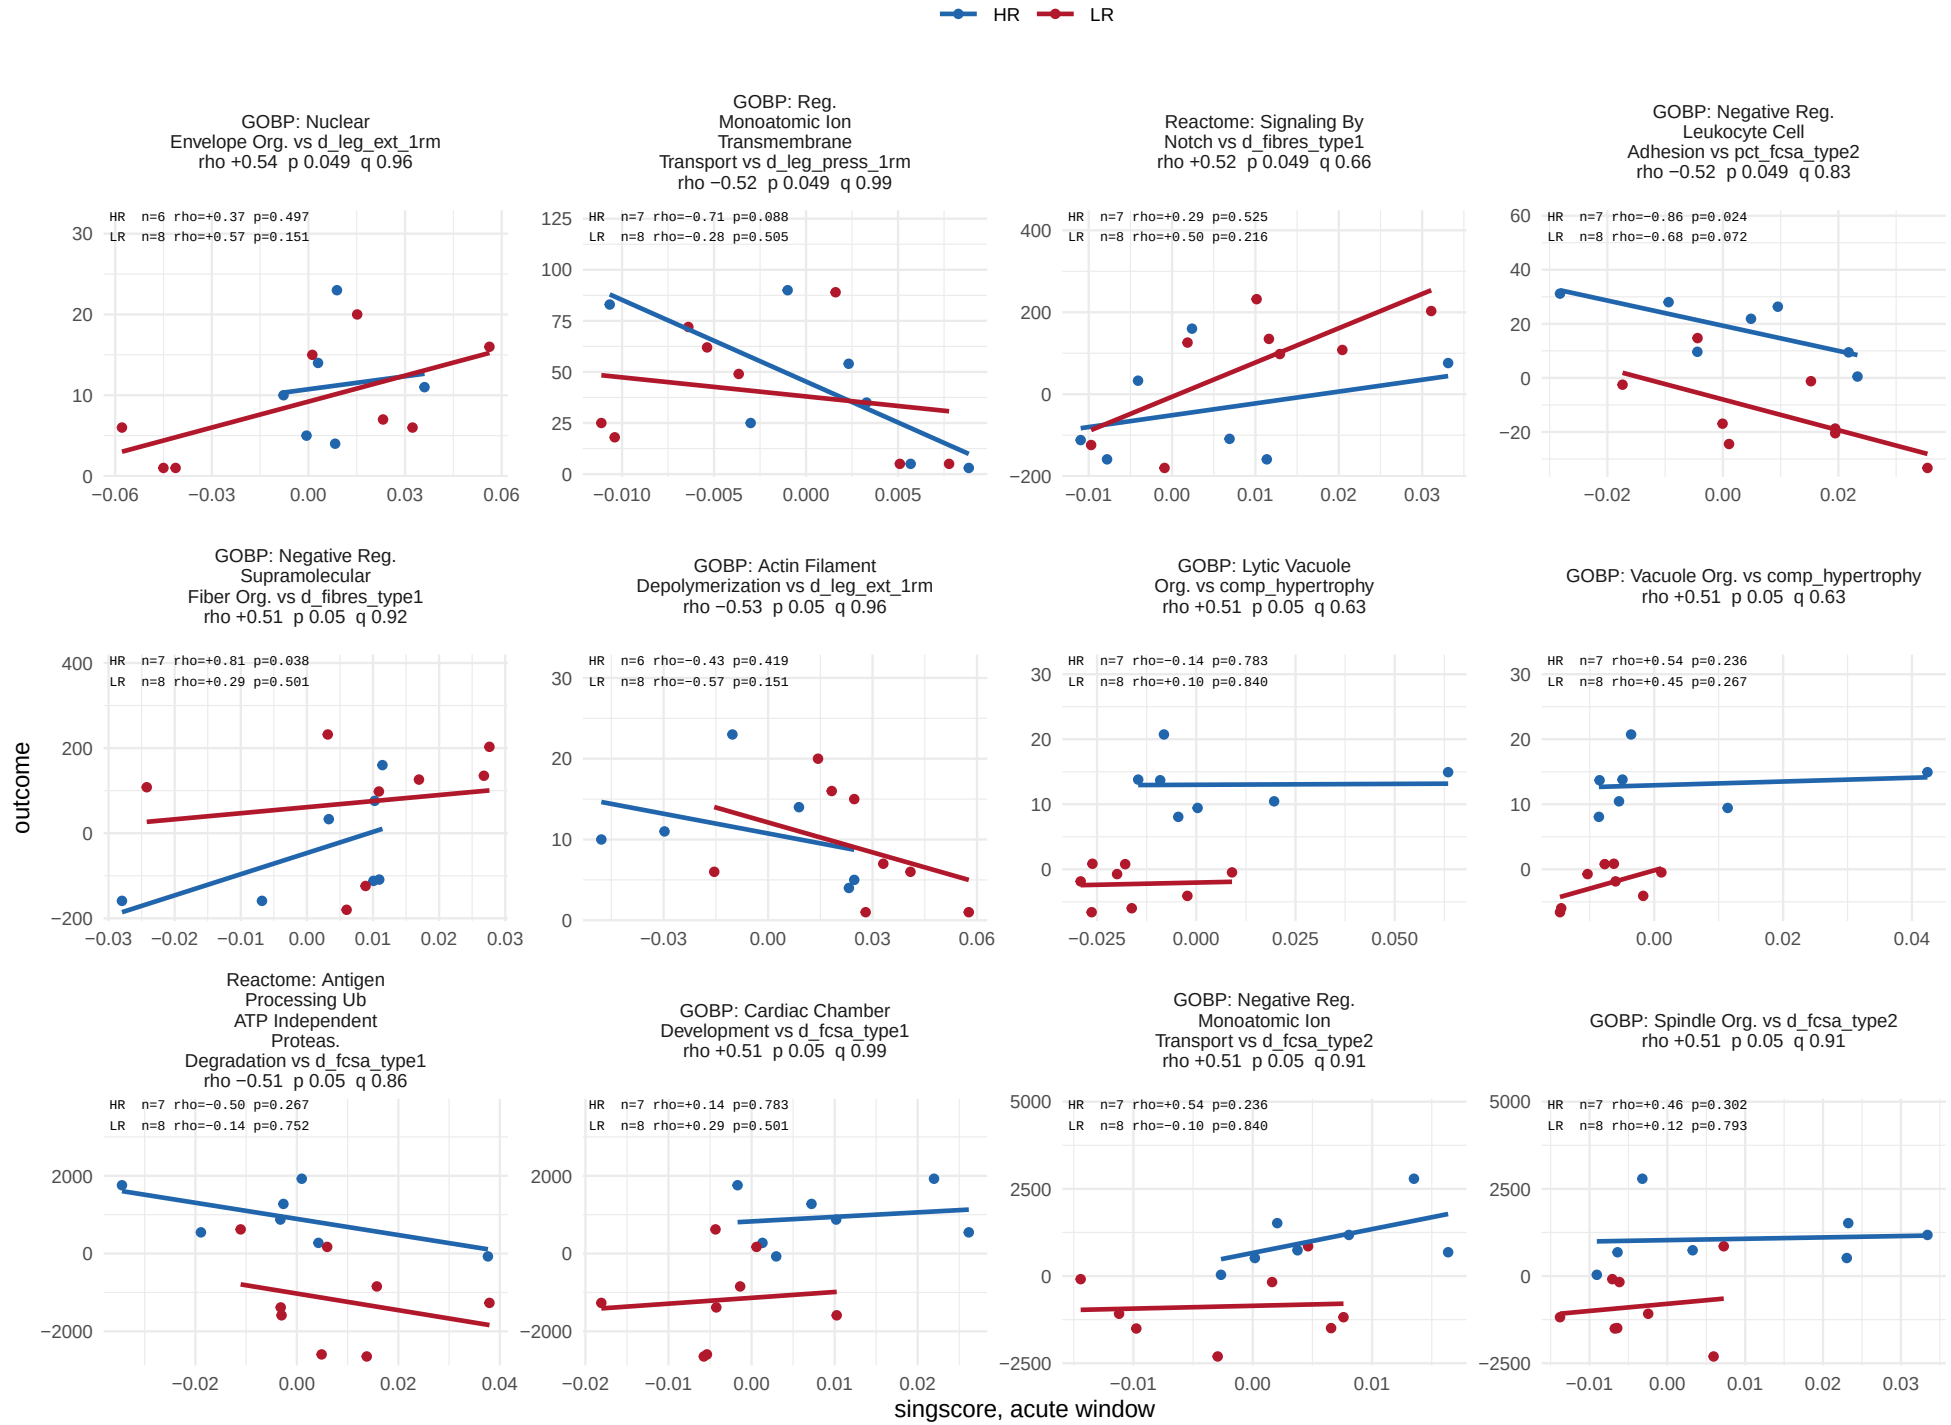

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

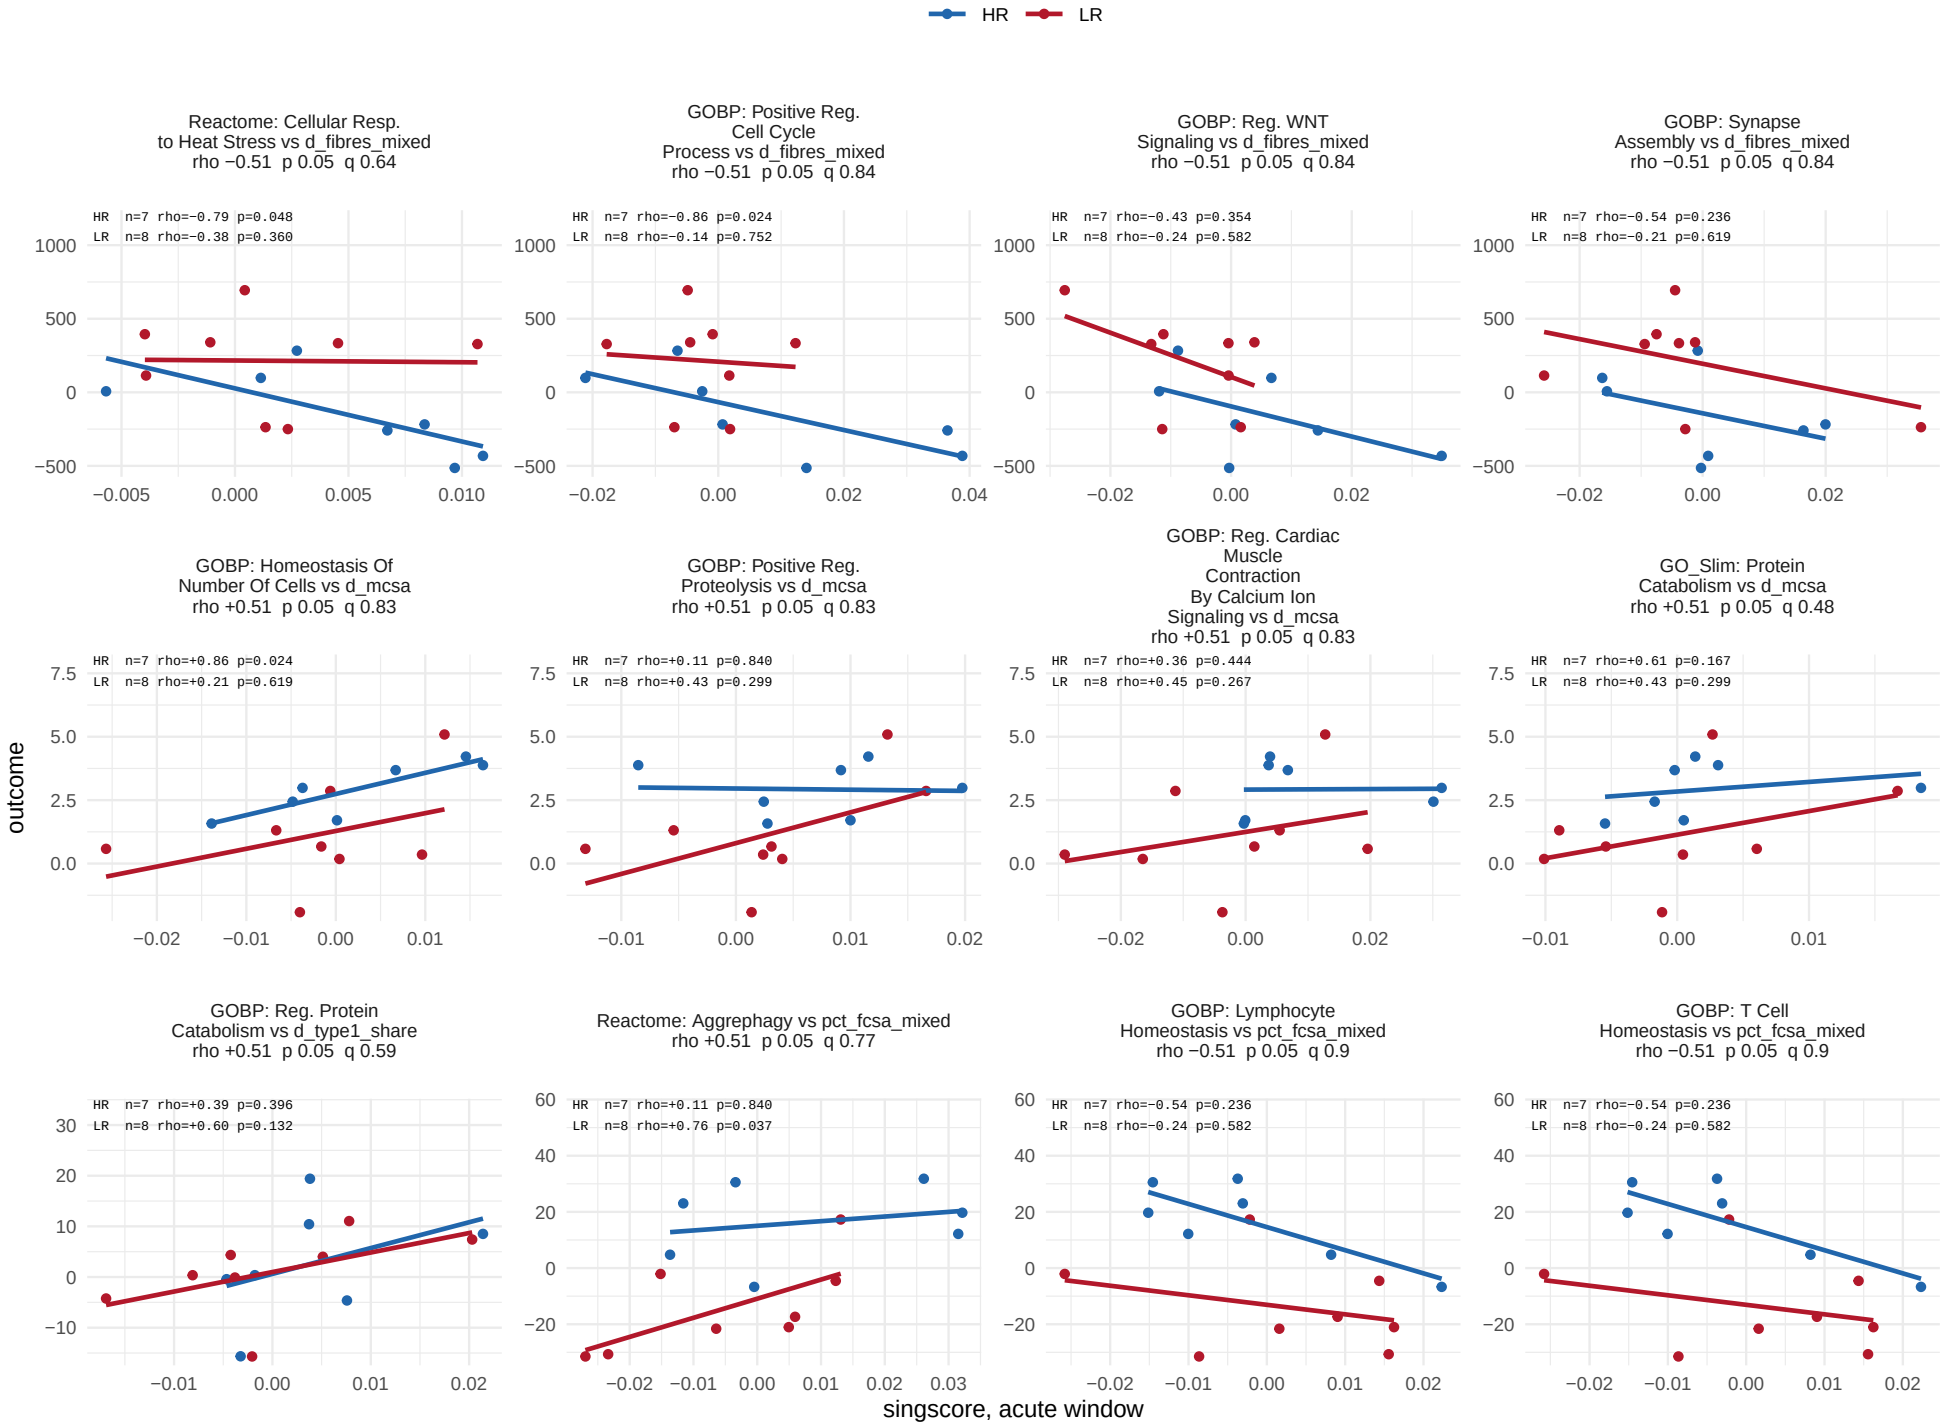

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

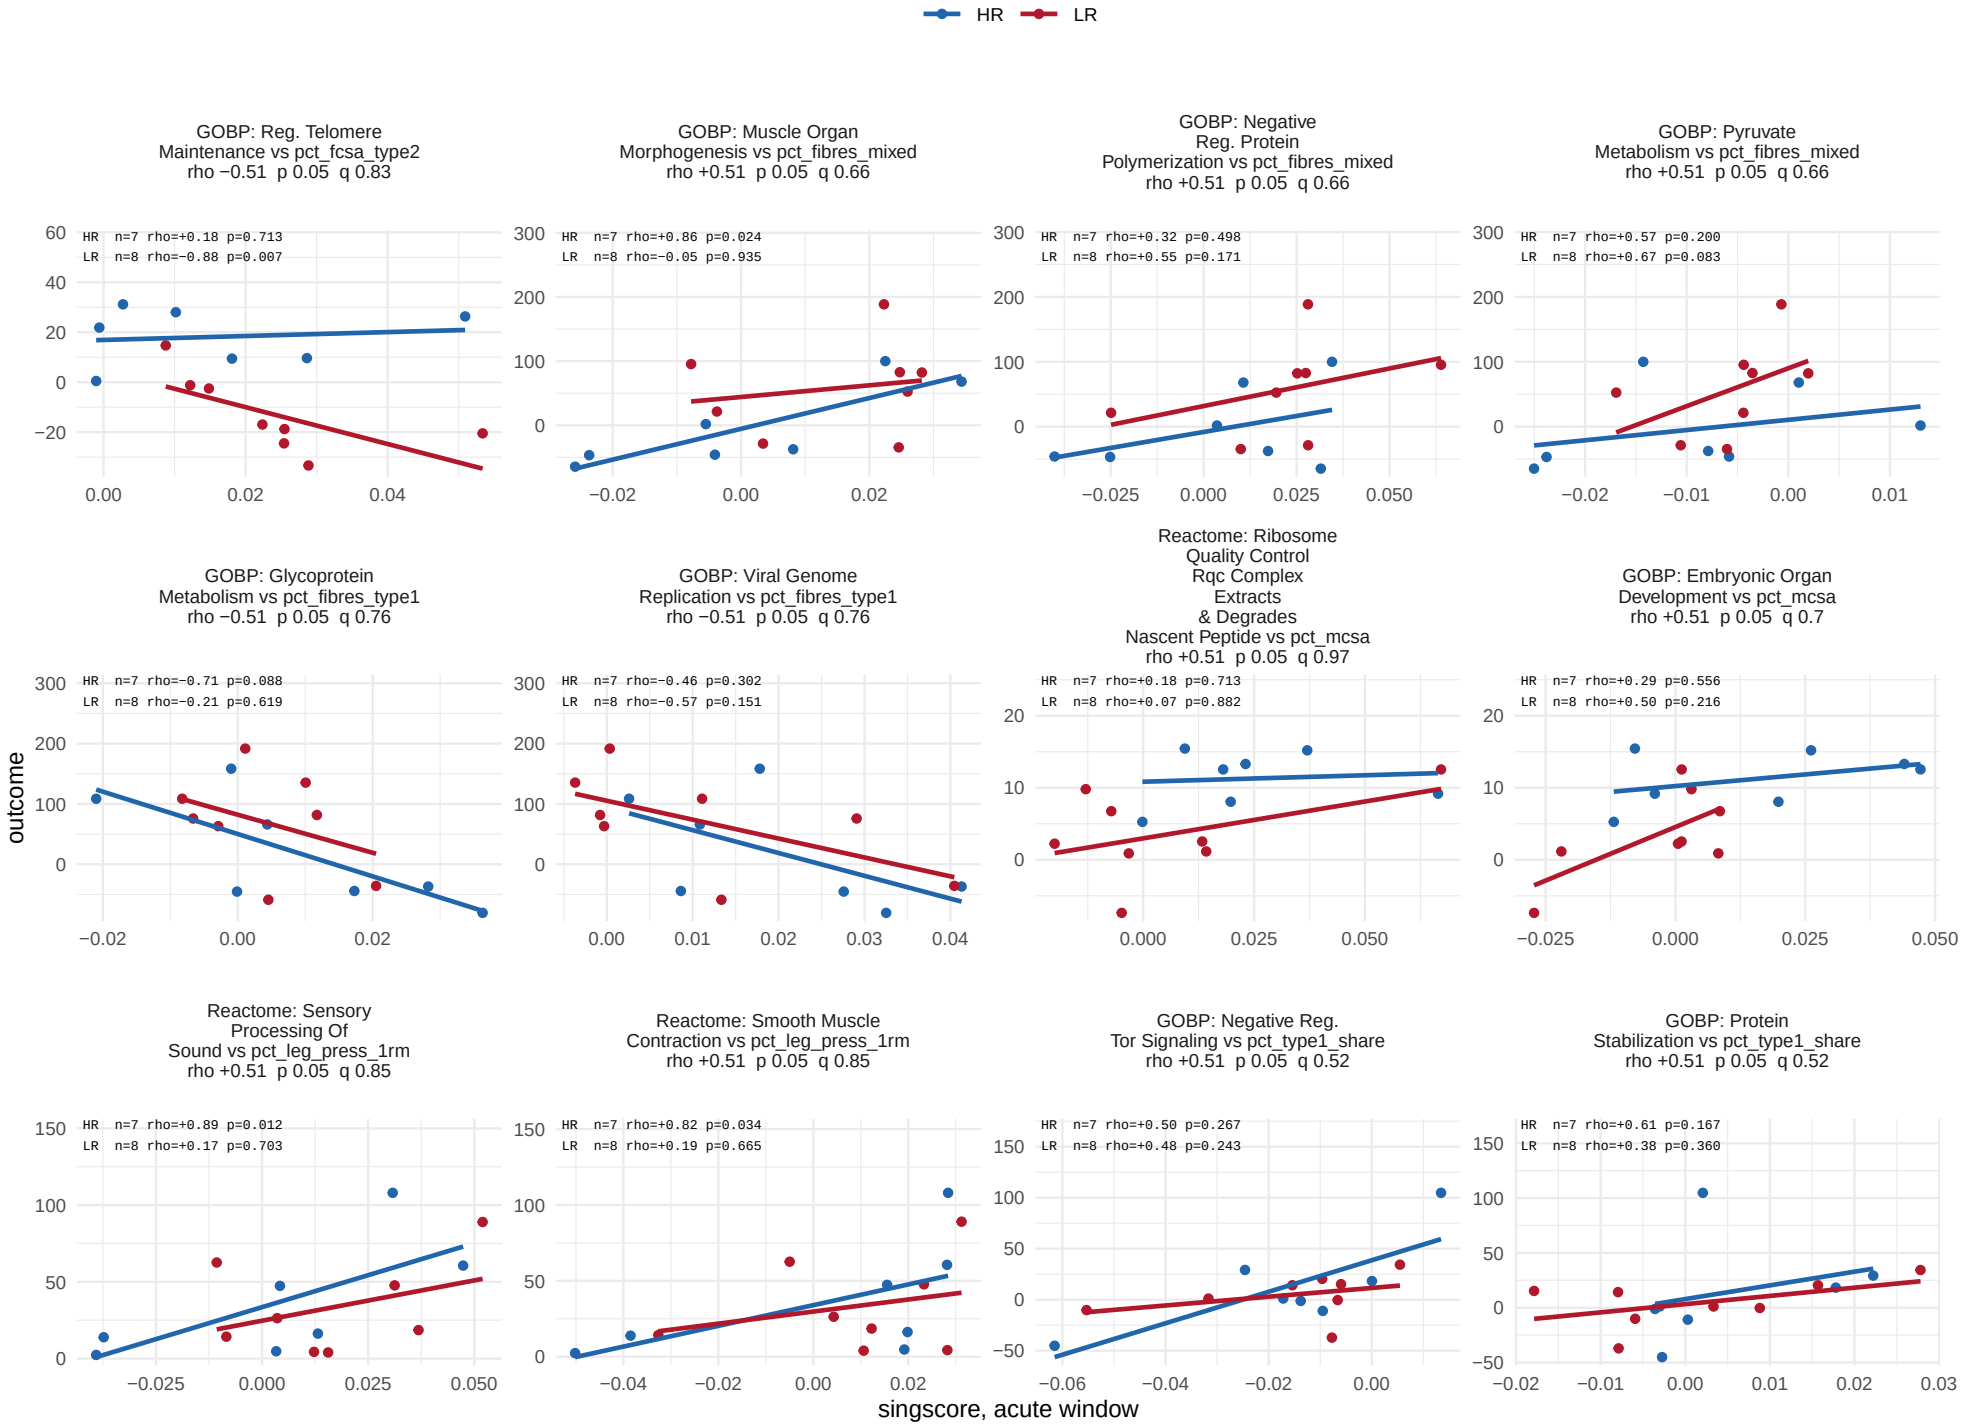

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, acute window


1467 of 27560 set−outcome pairs at p < 0.05, 91 at BH < 0.05.

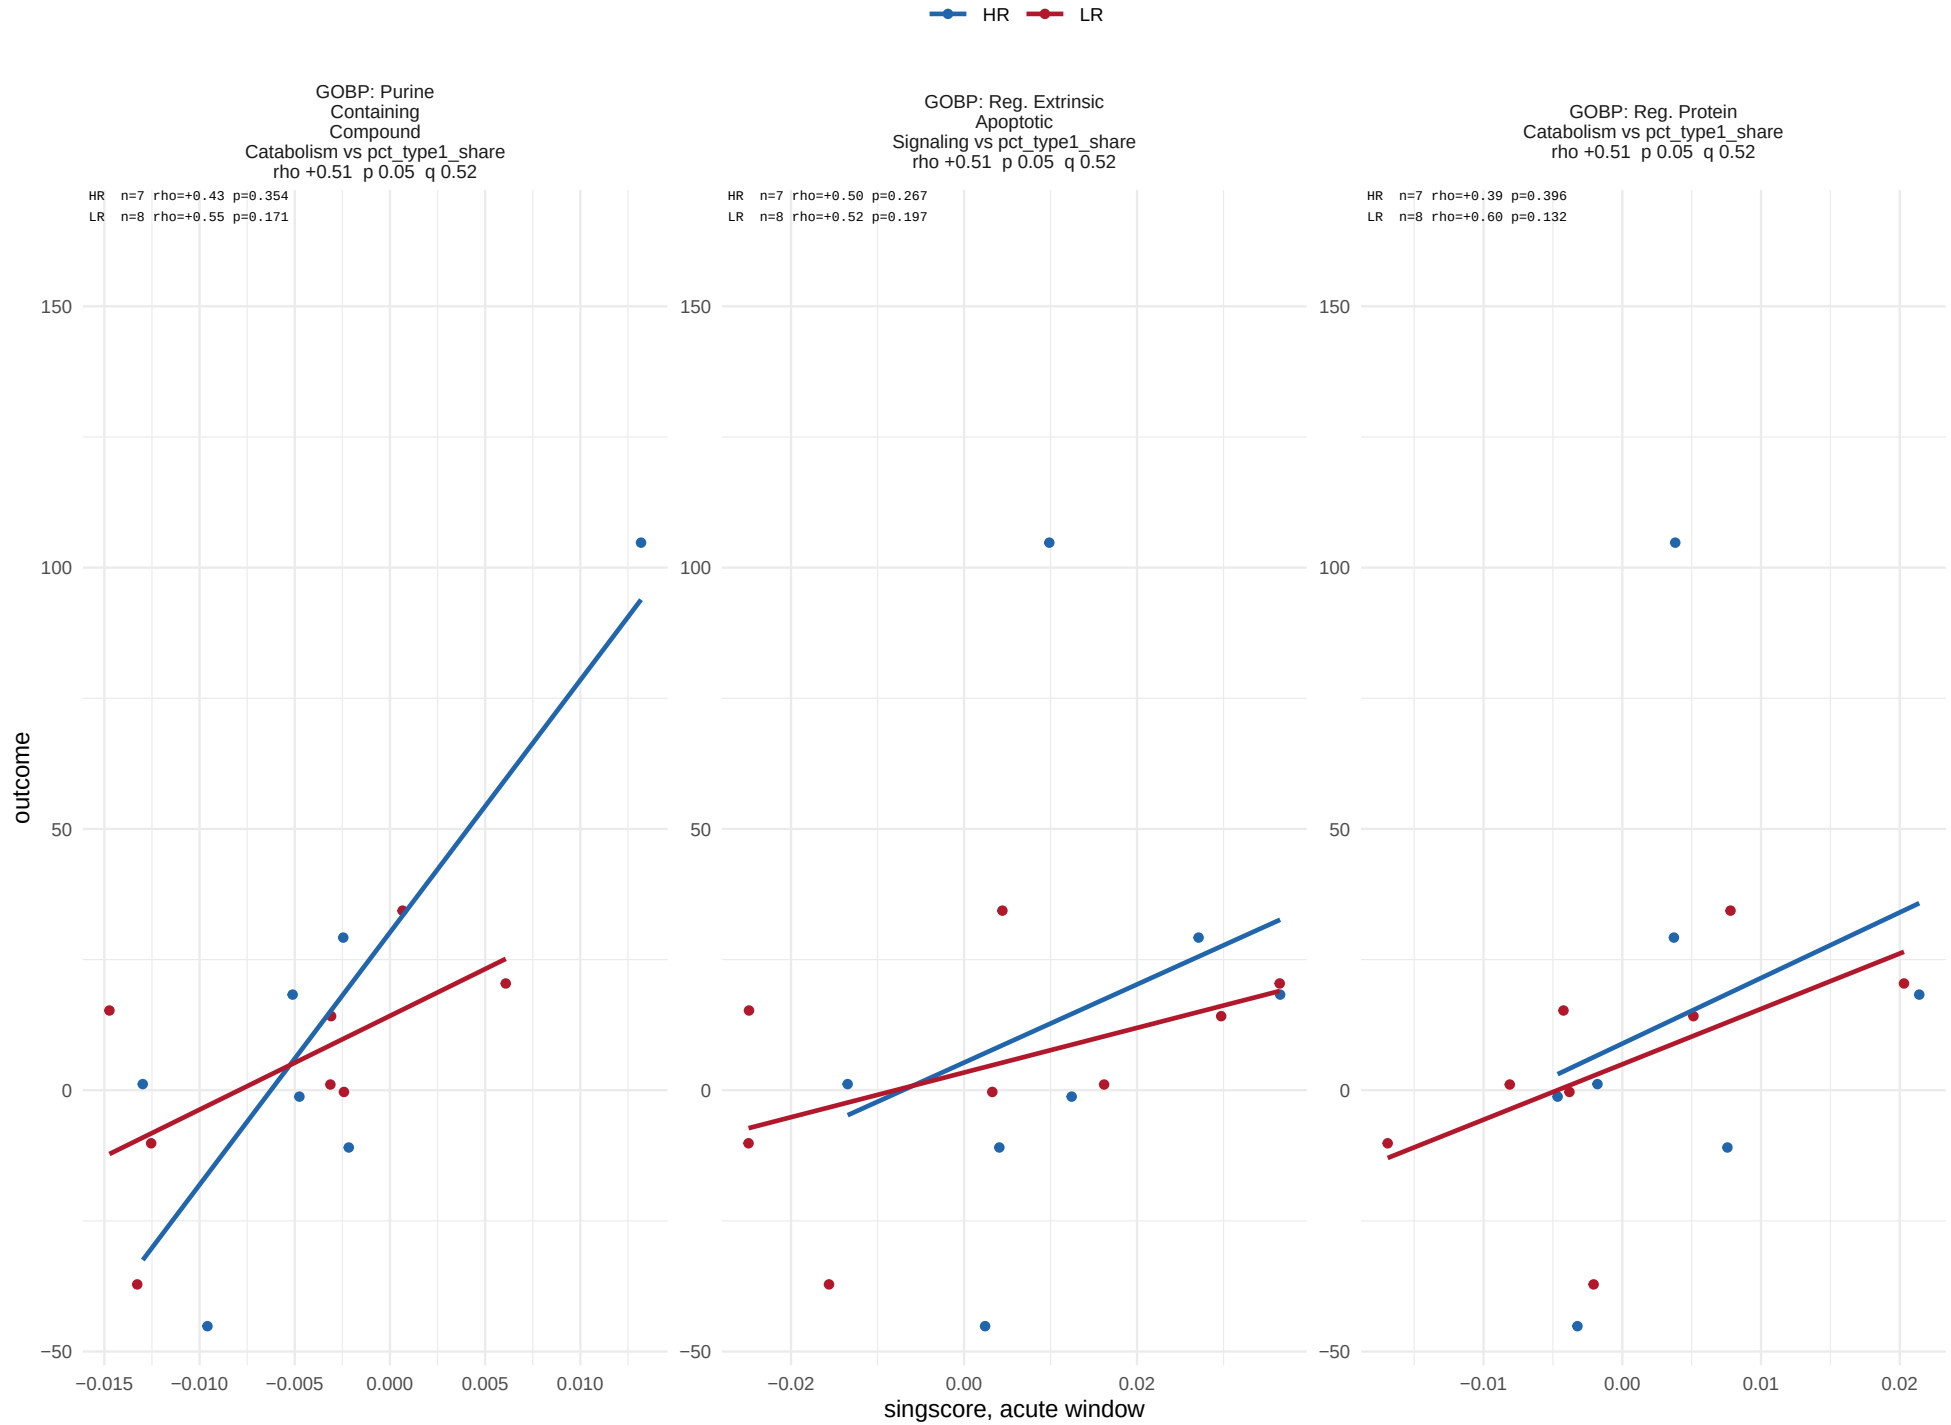

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

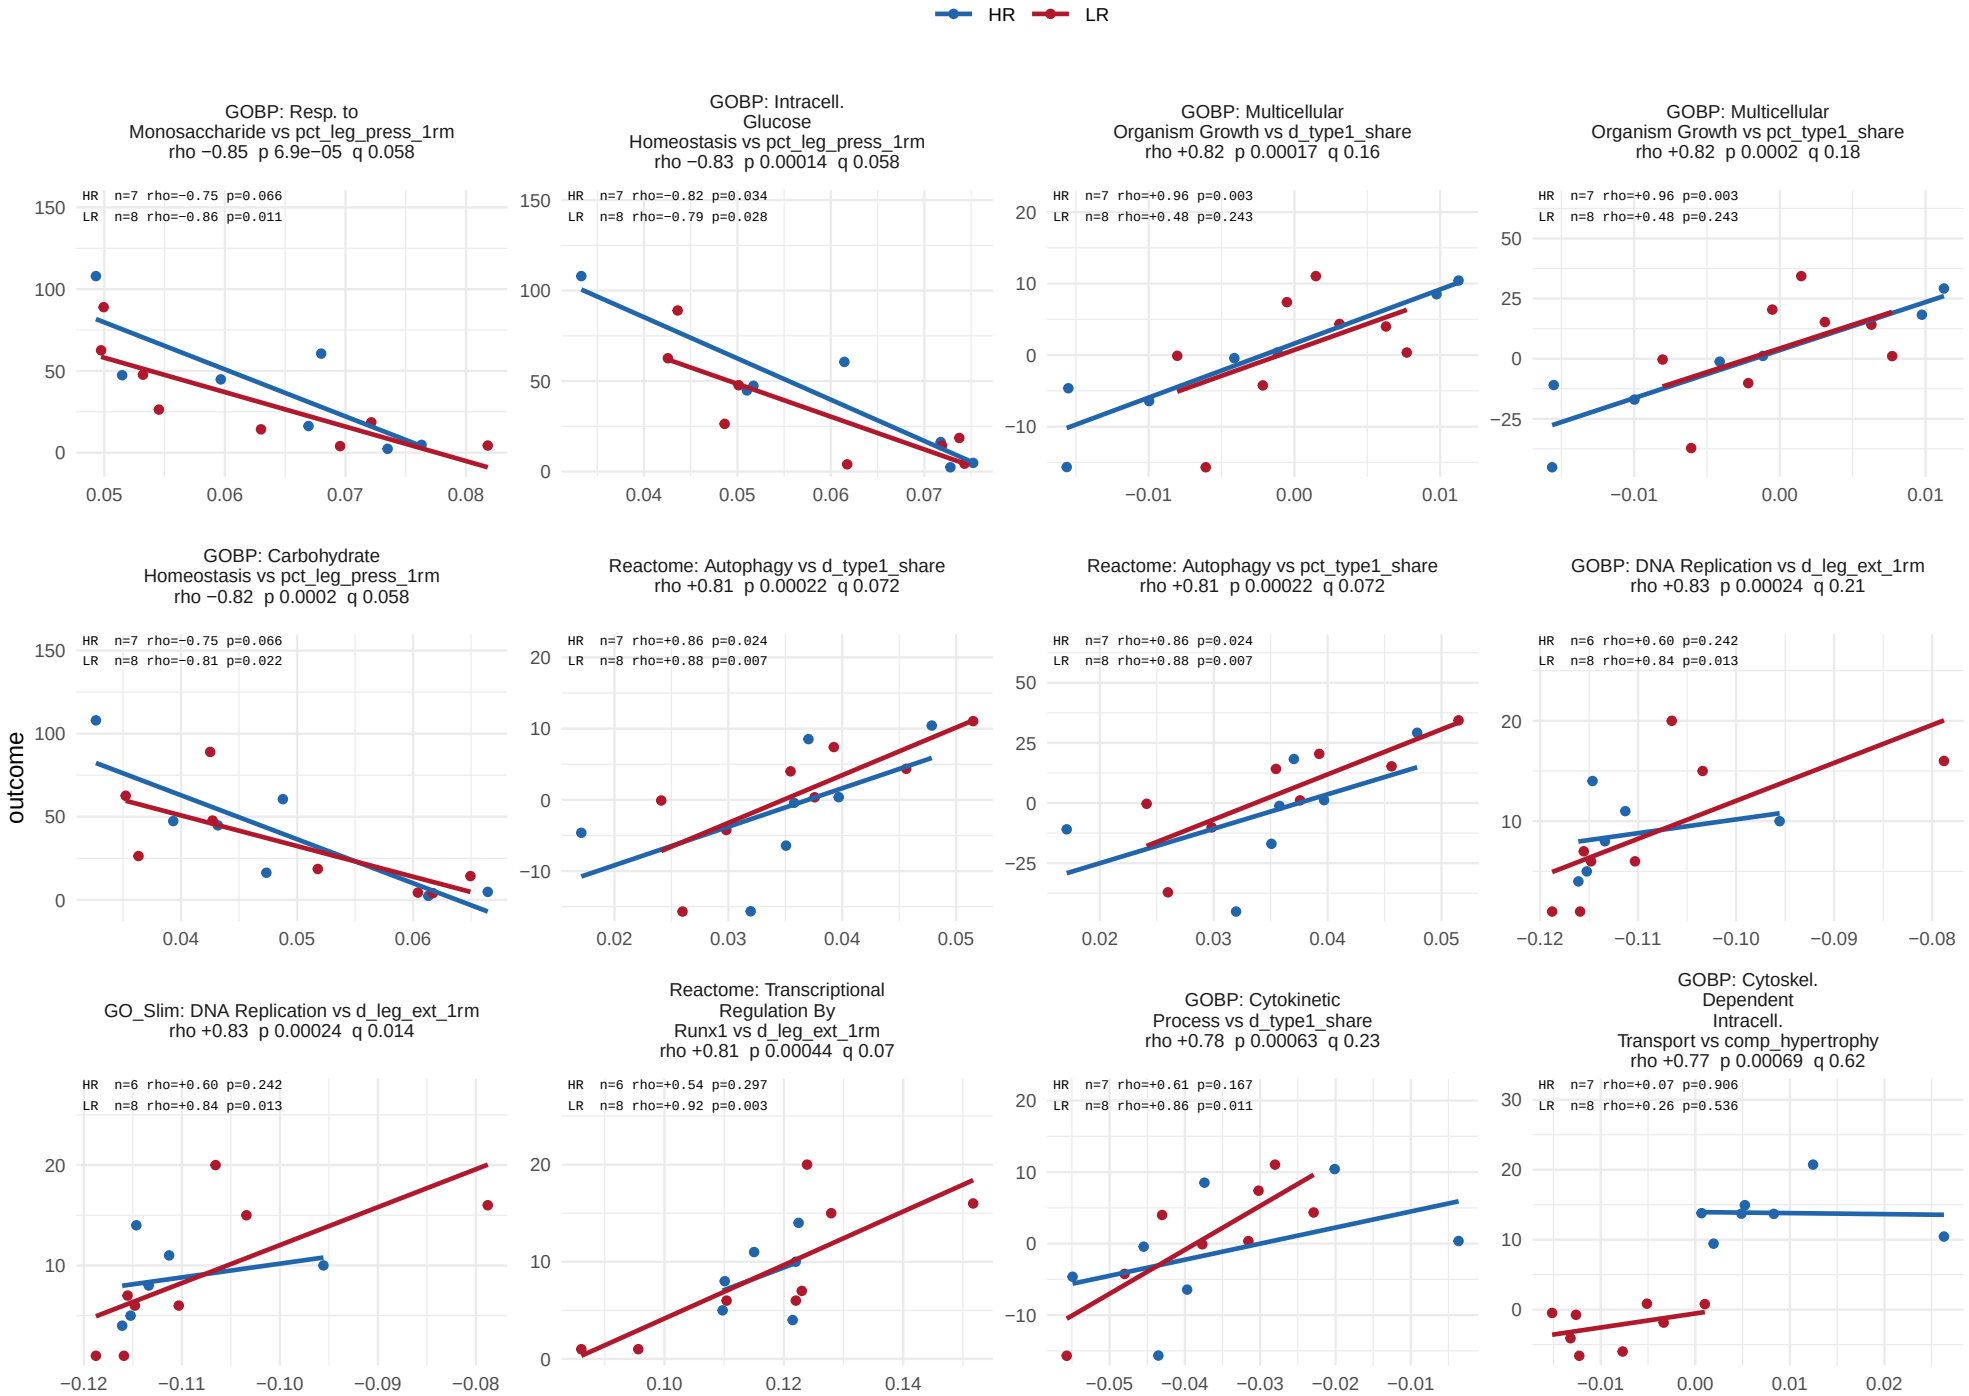

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

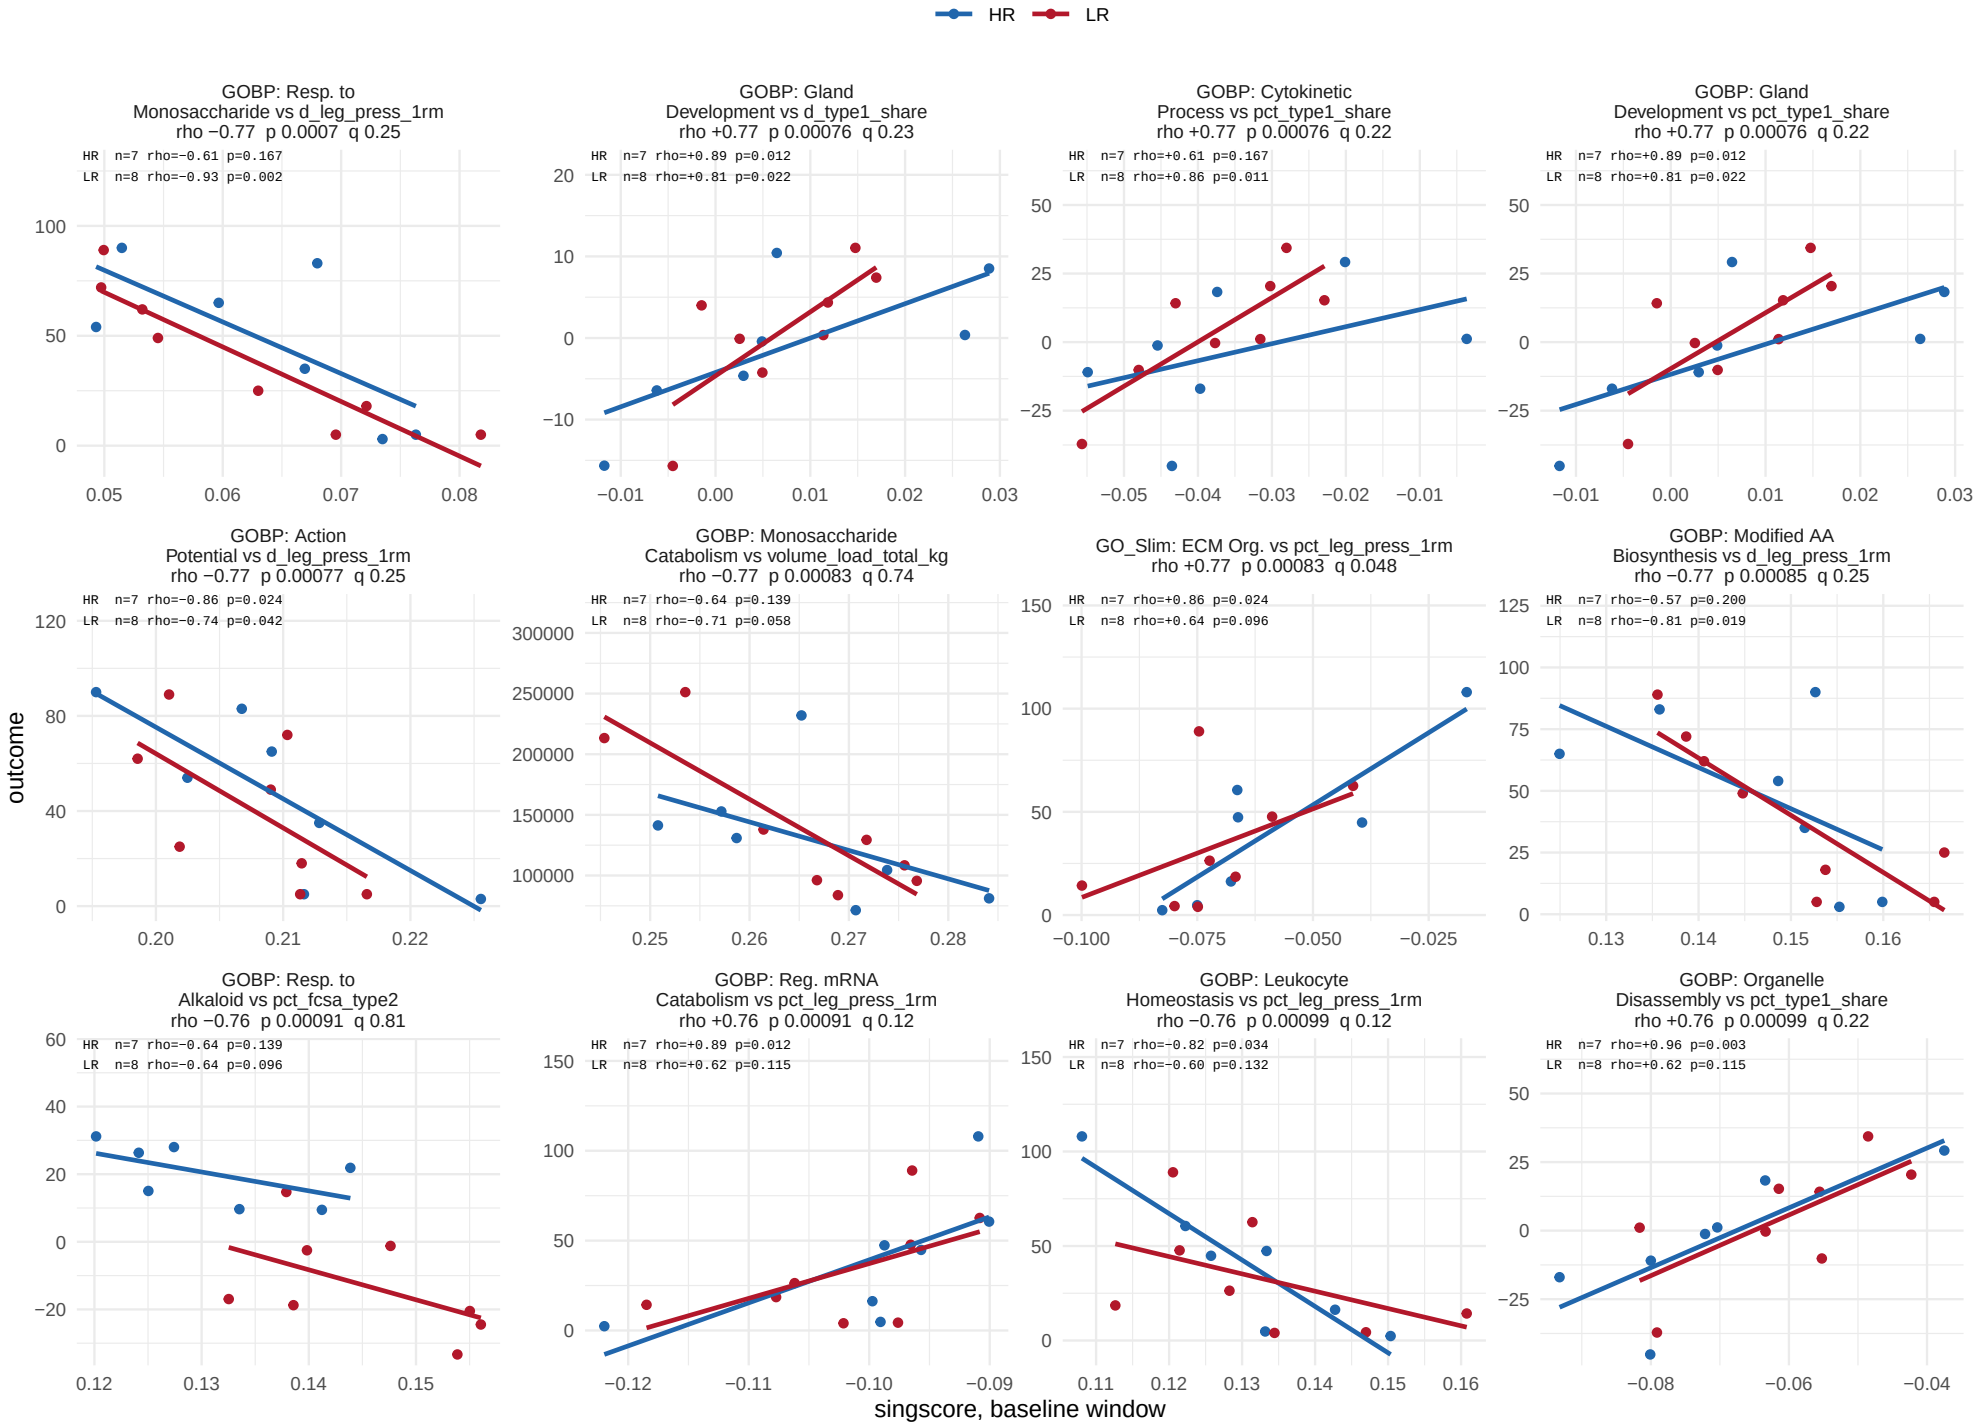

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

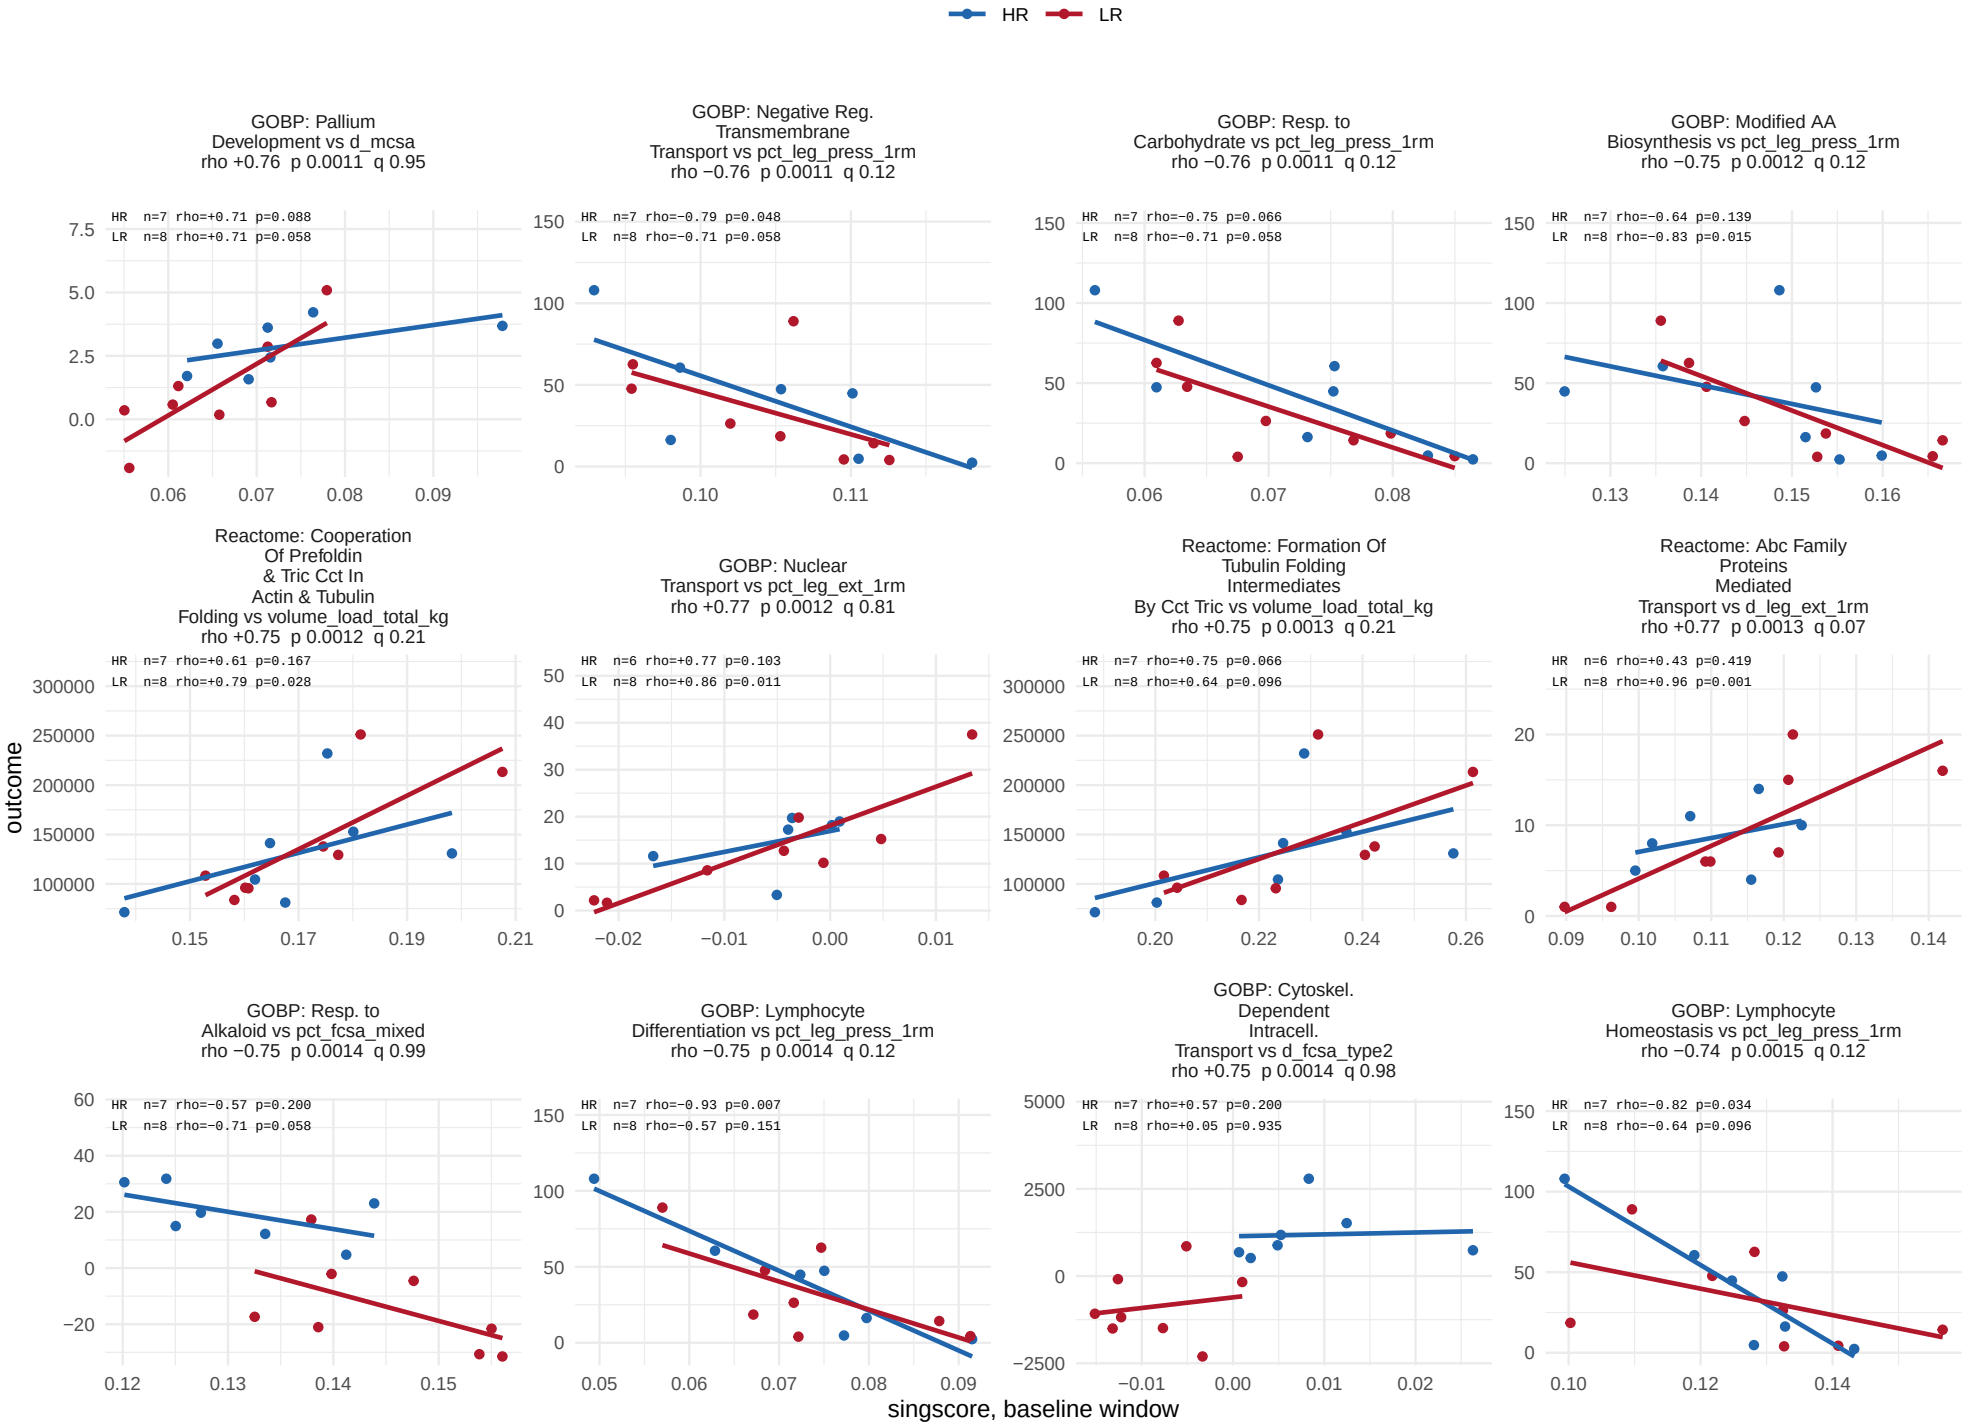

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

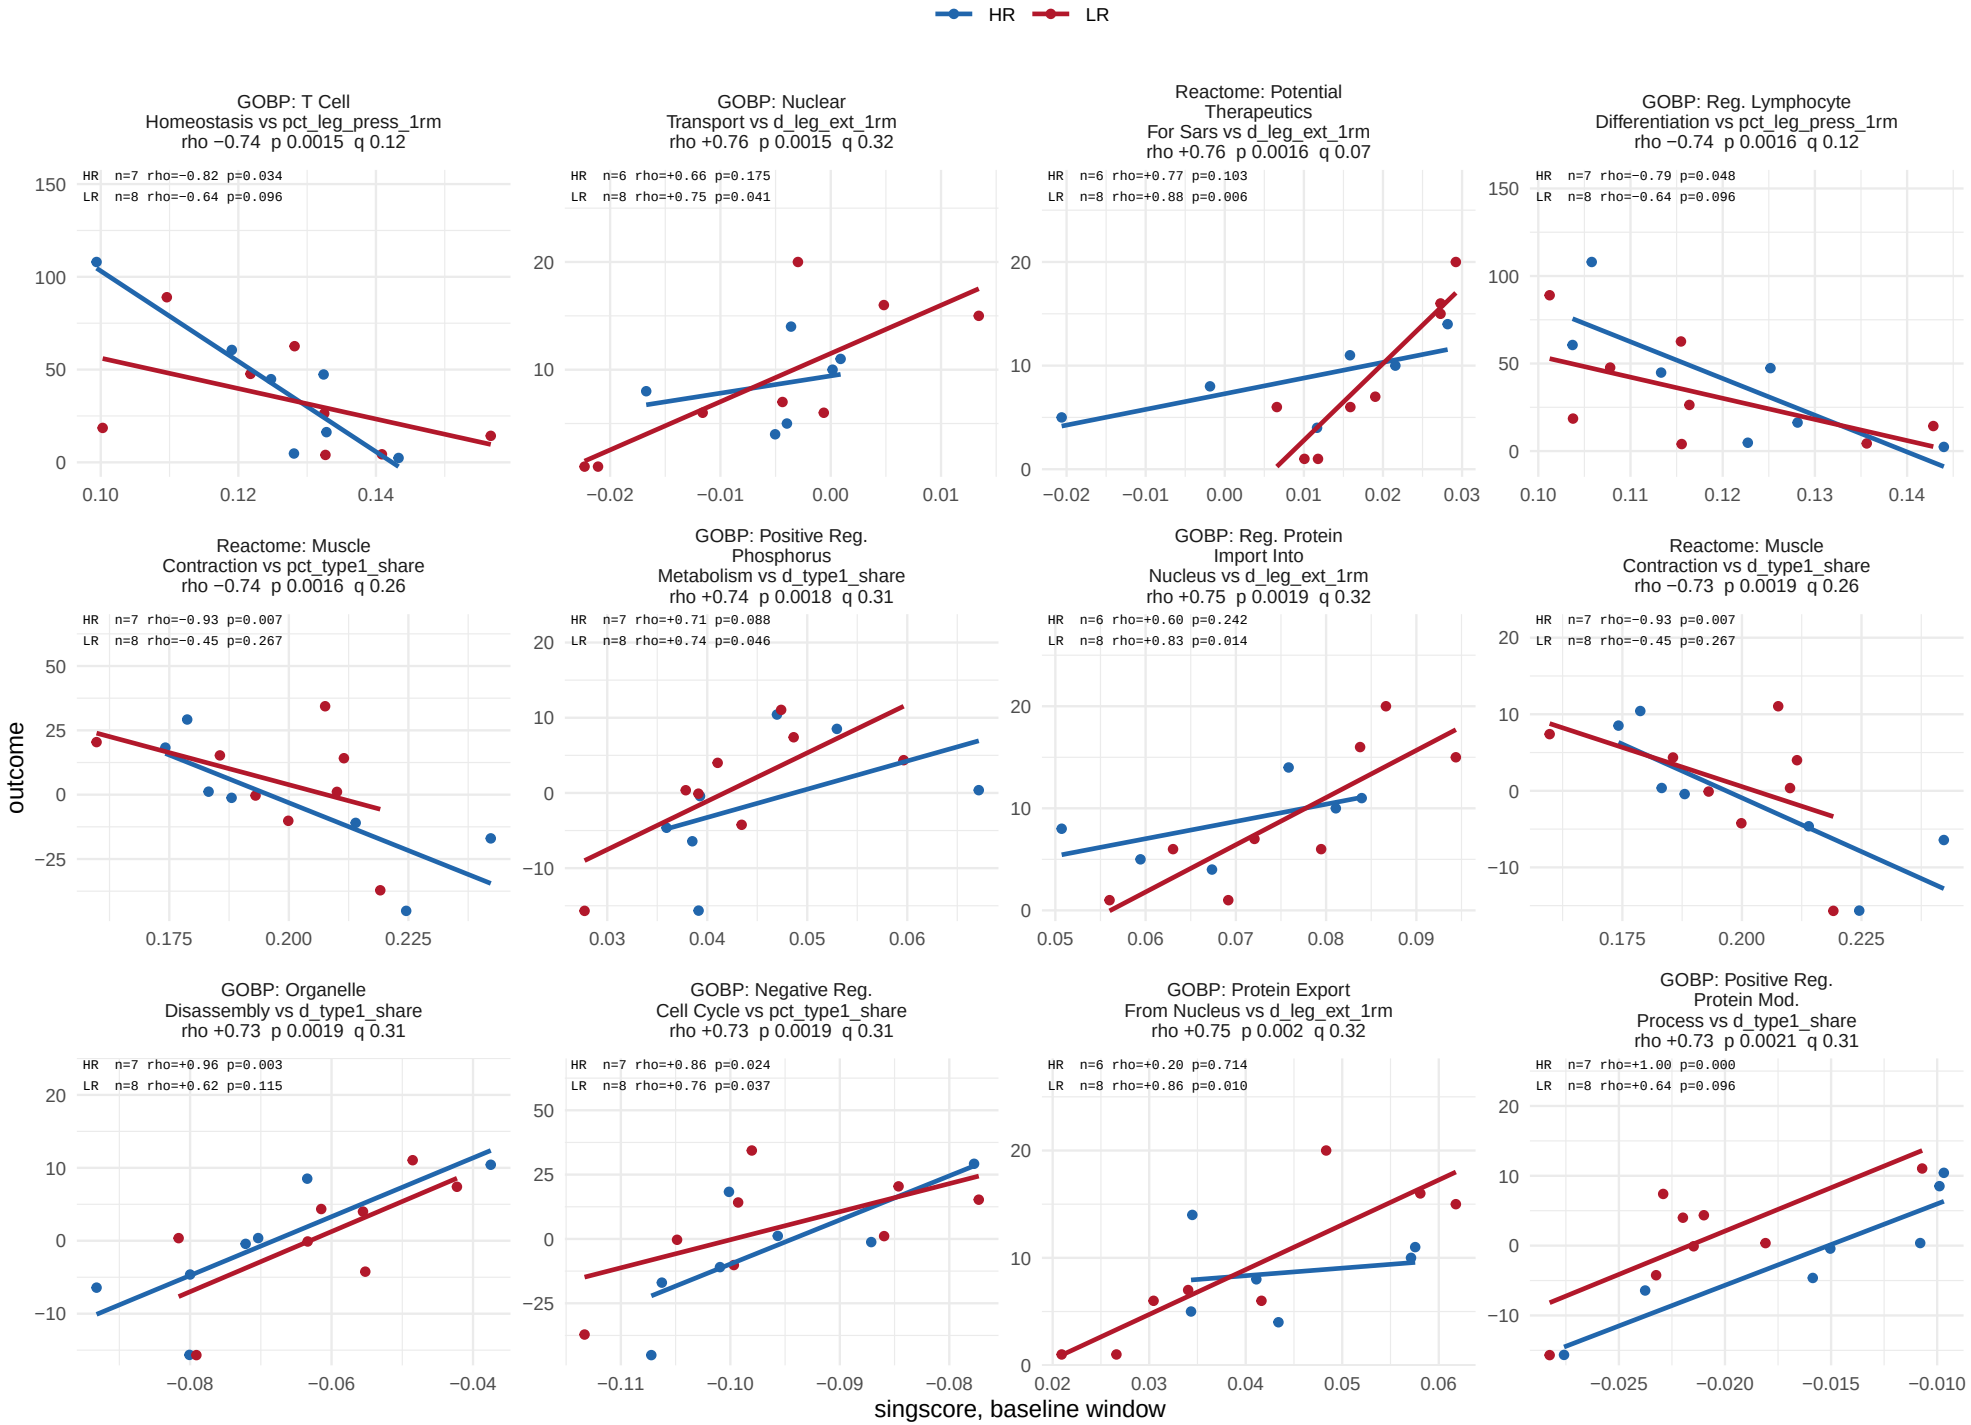

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

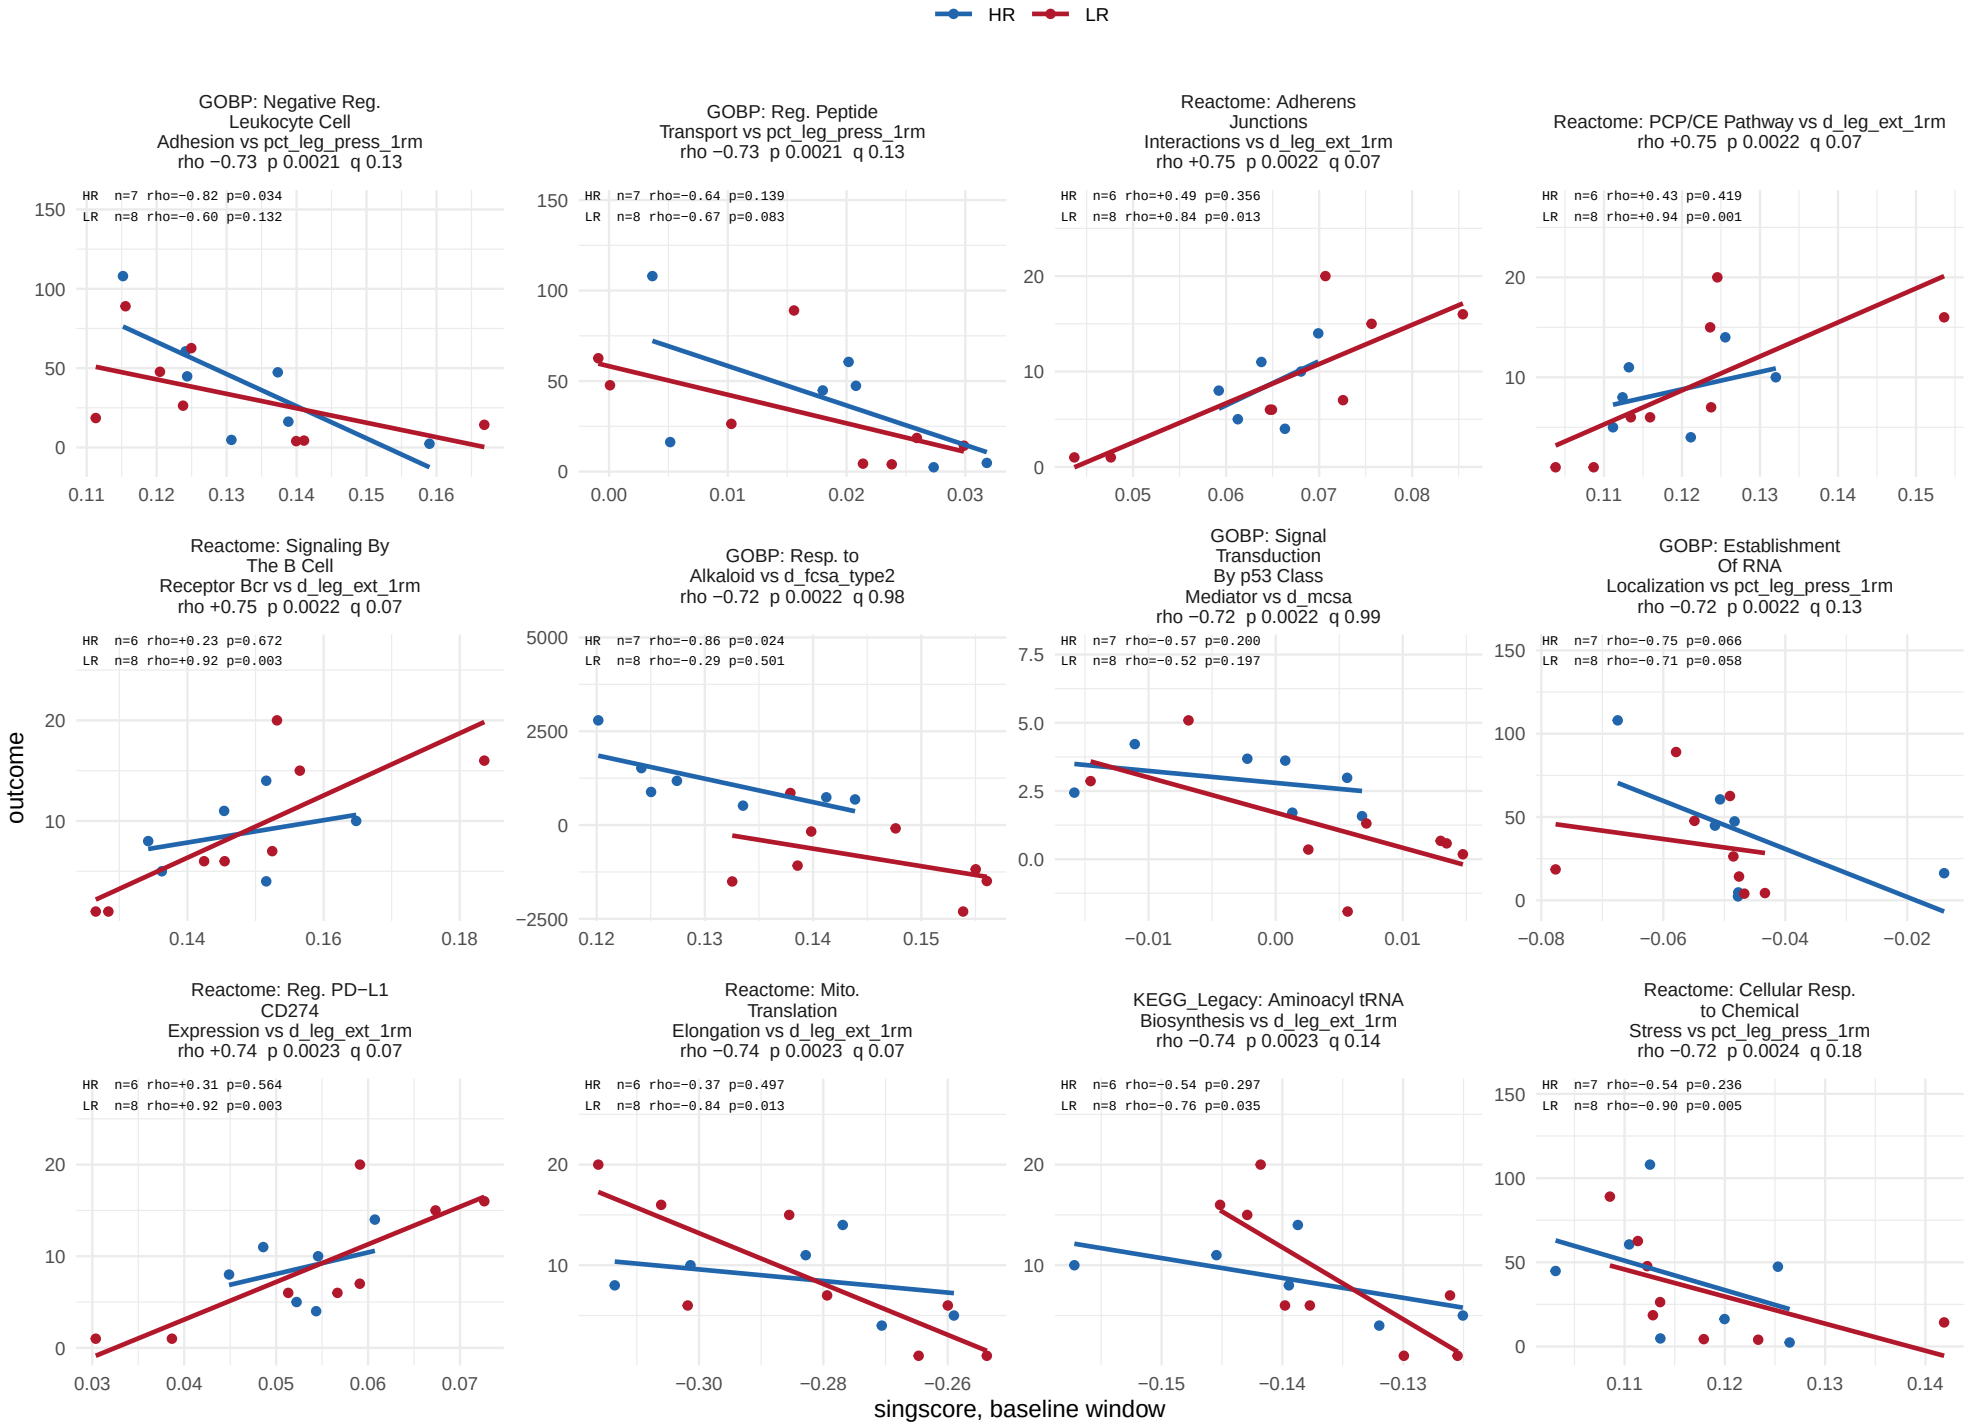

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

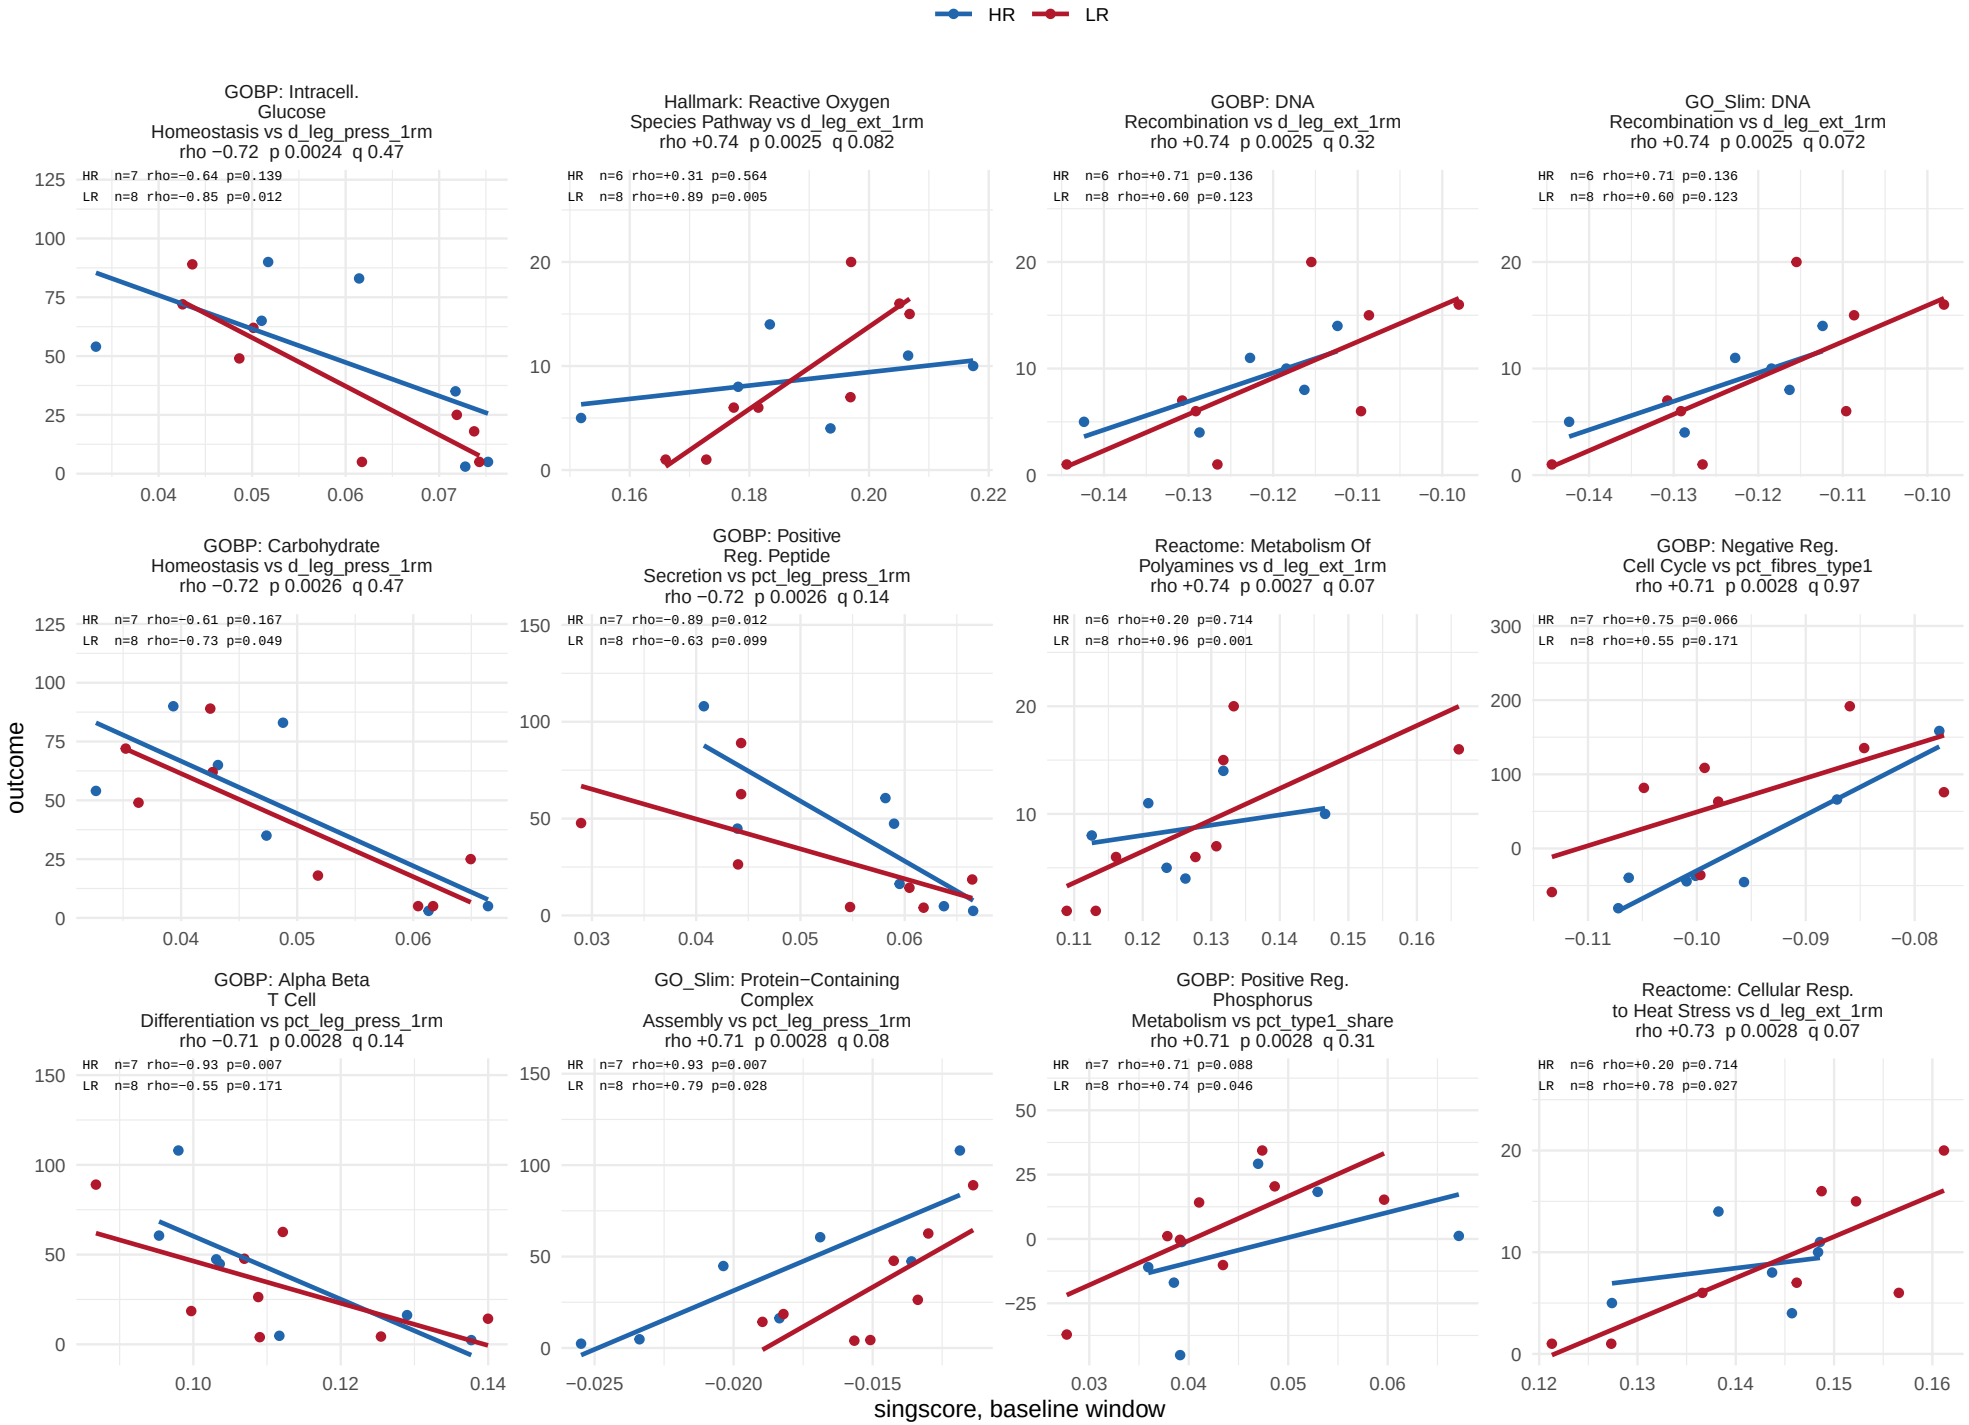

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

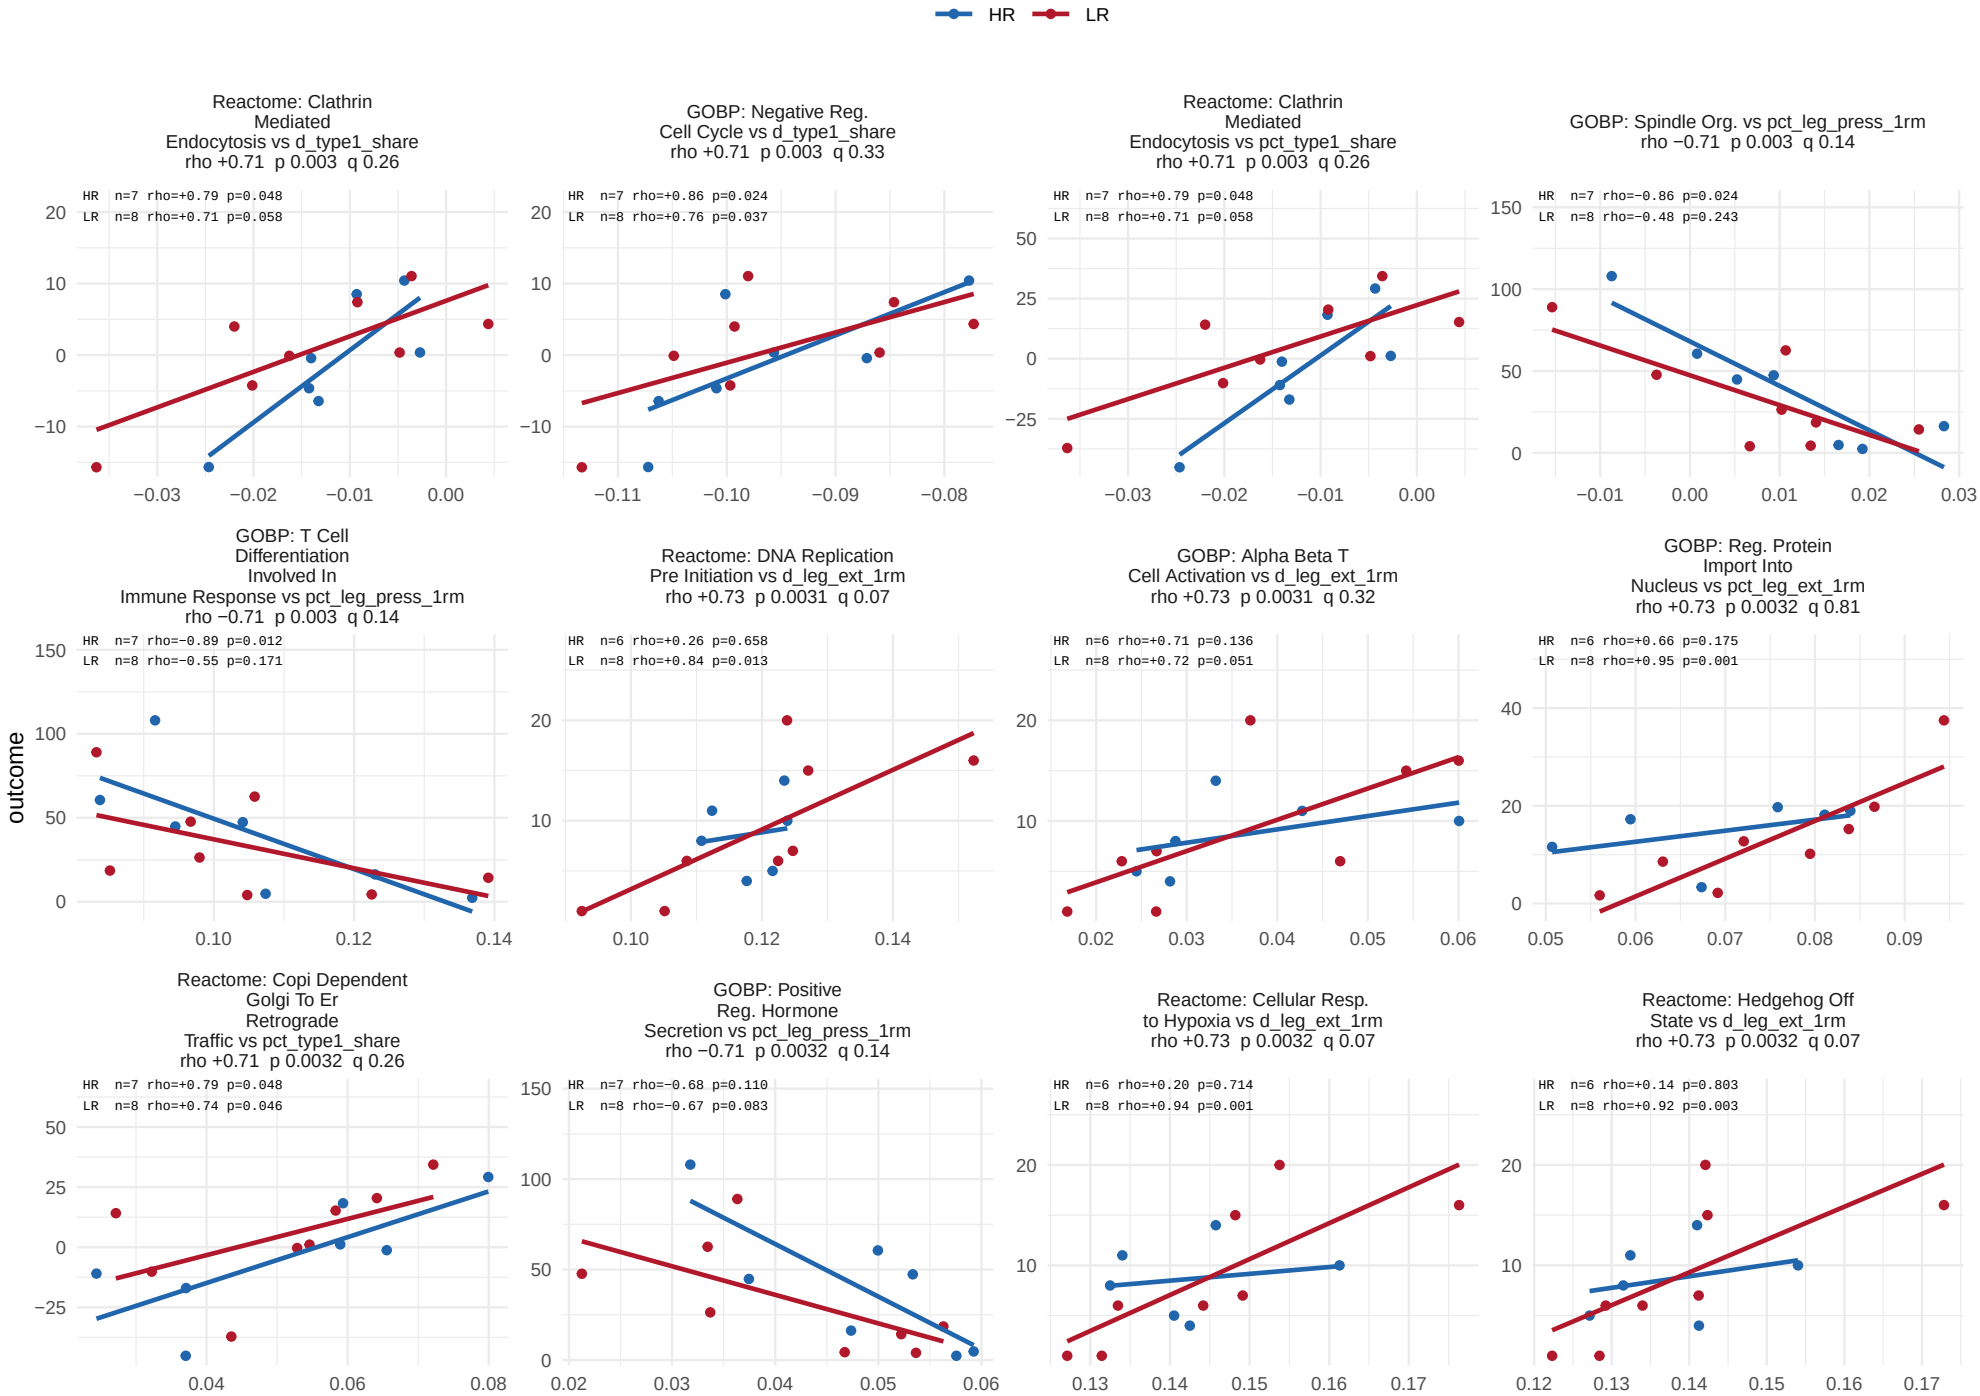

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

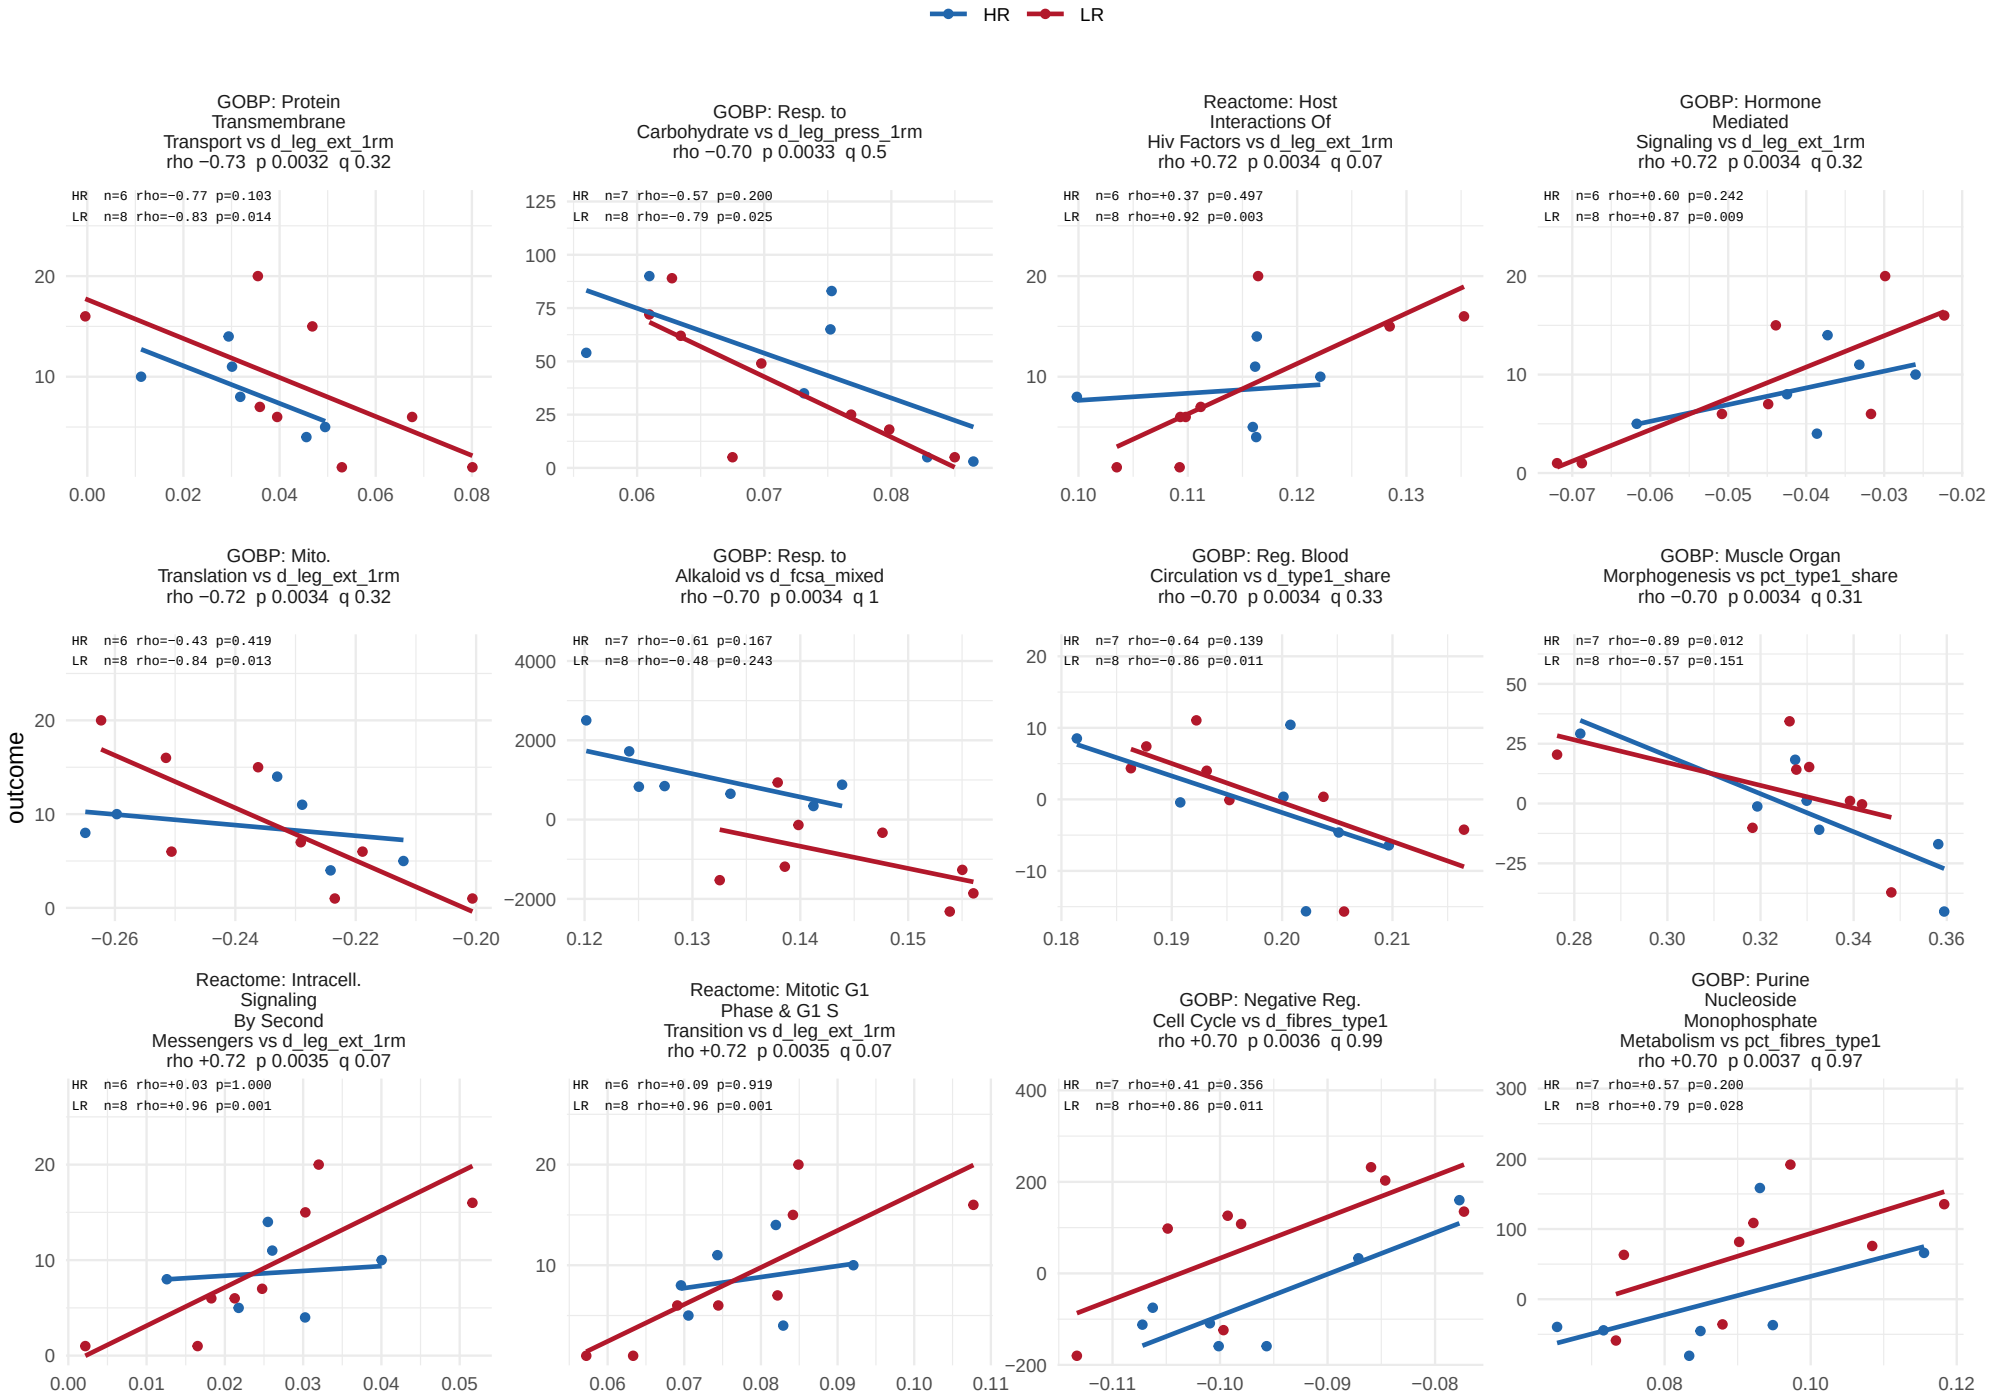

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

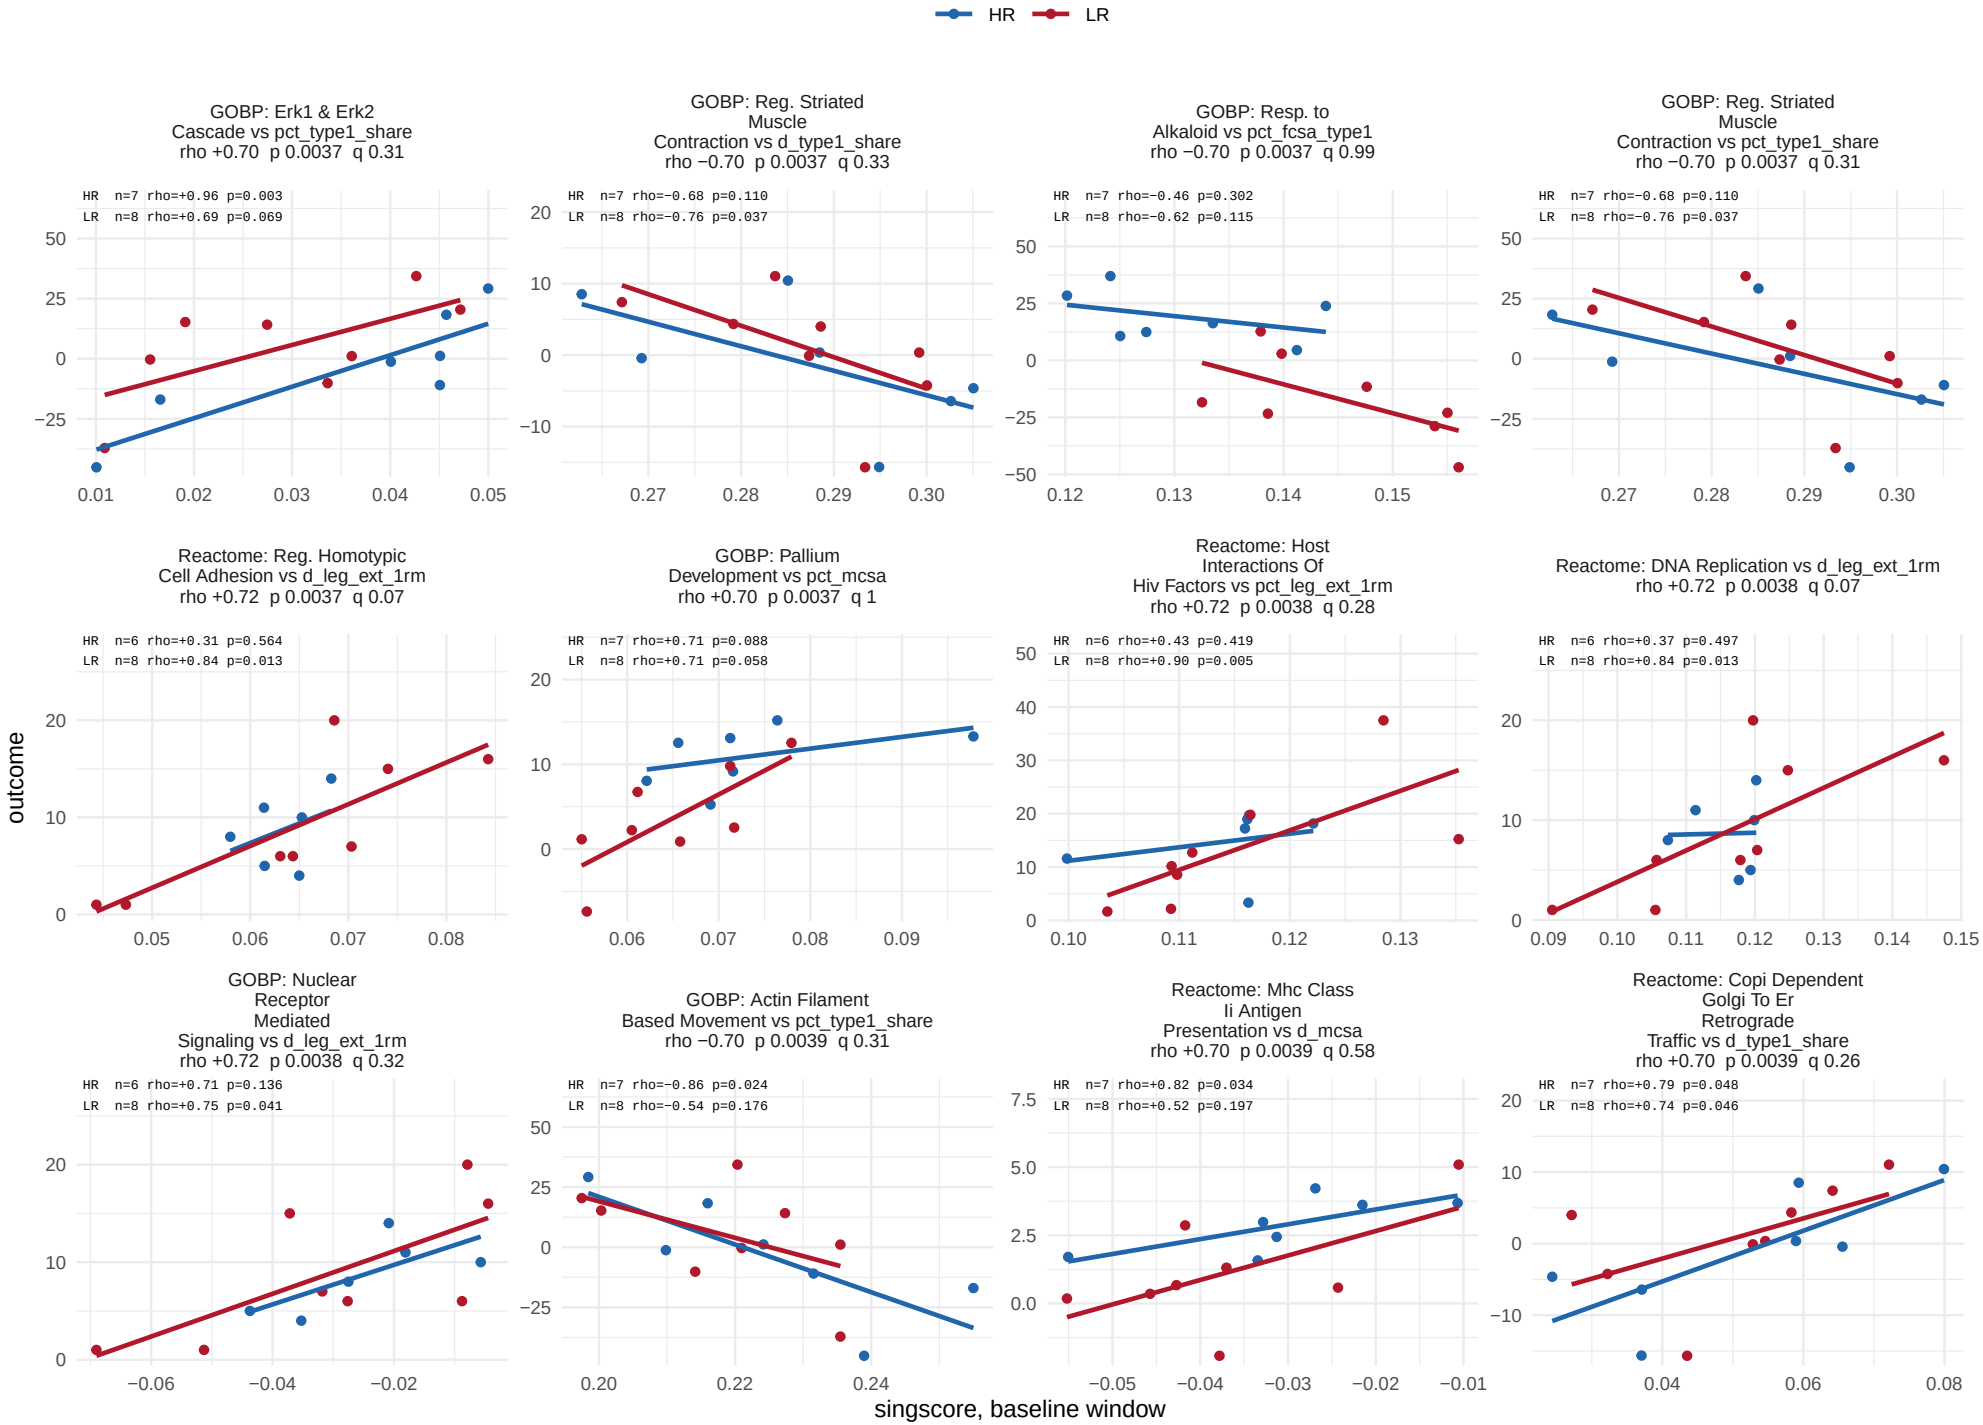

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

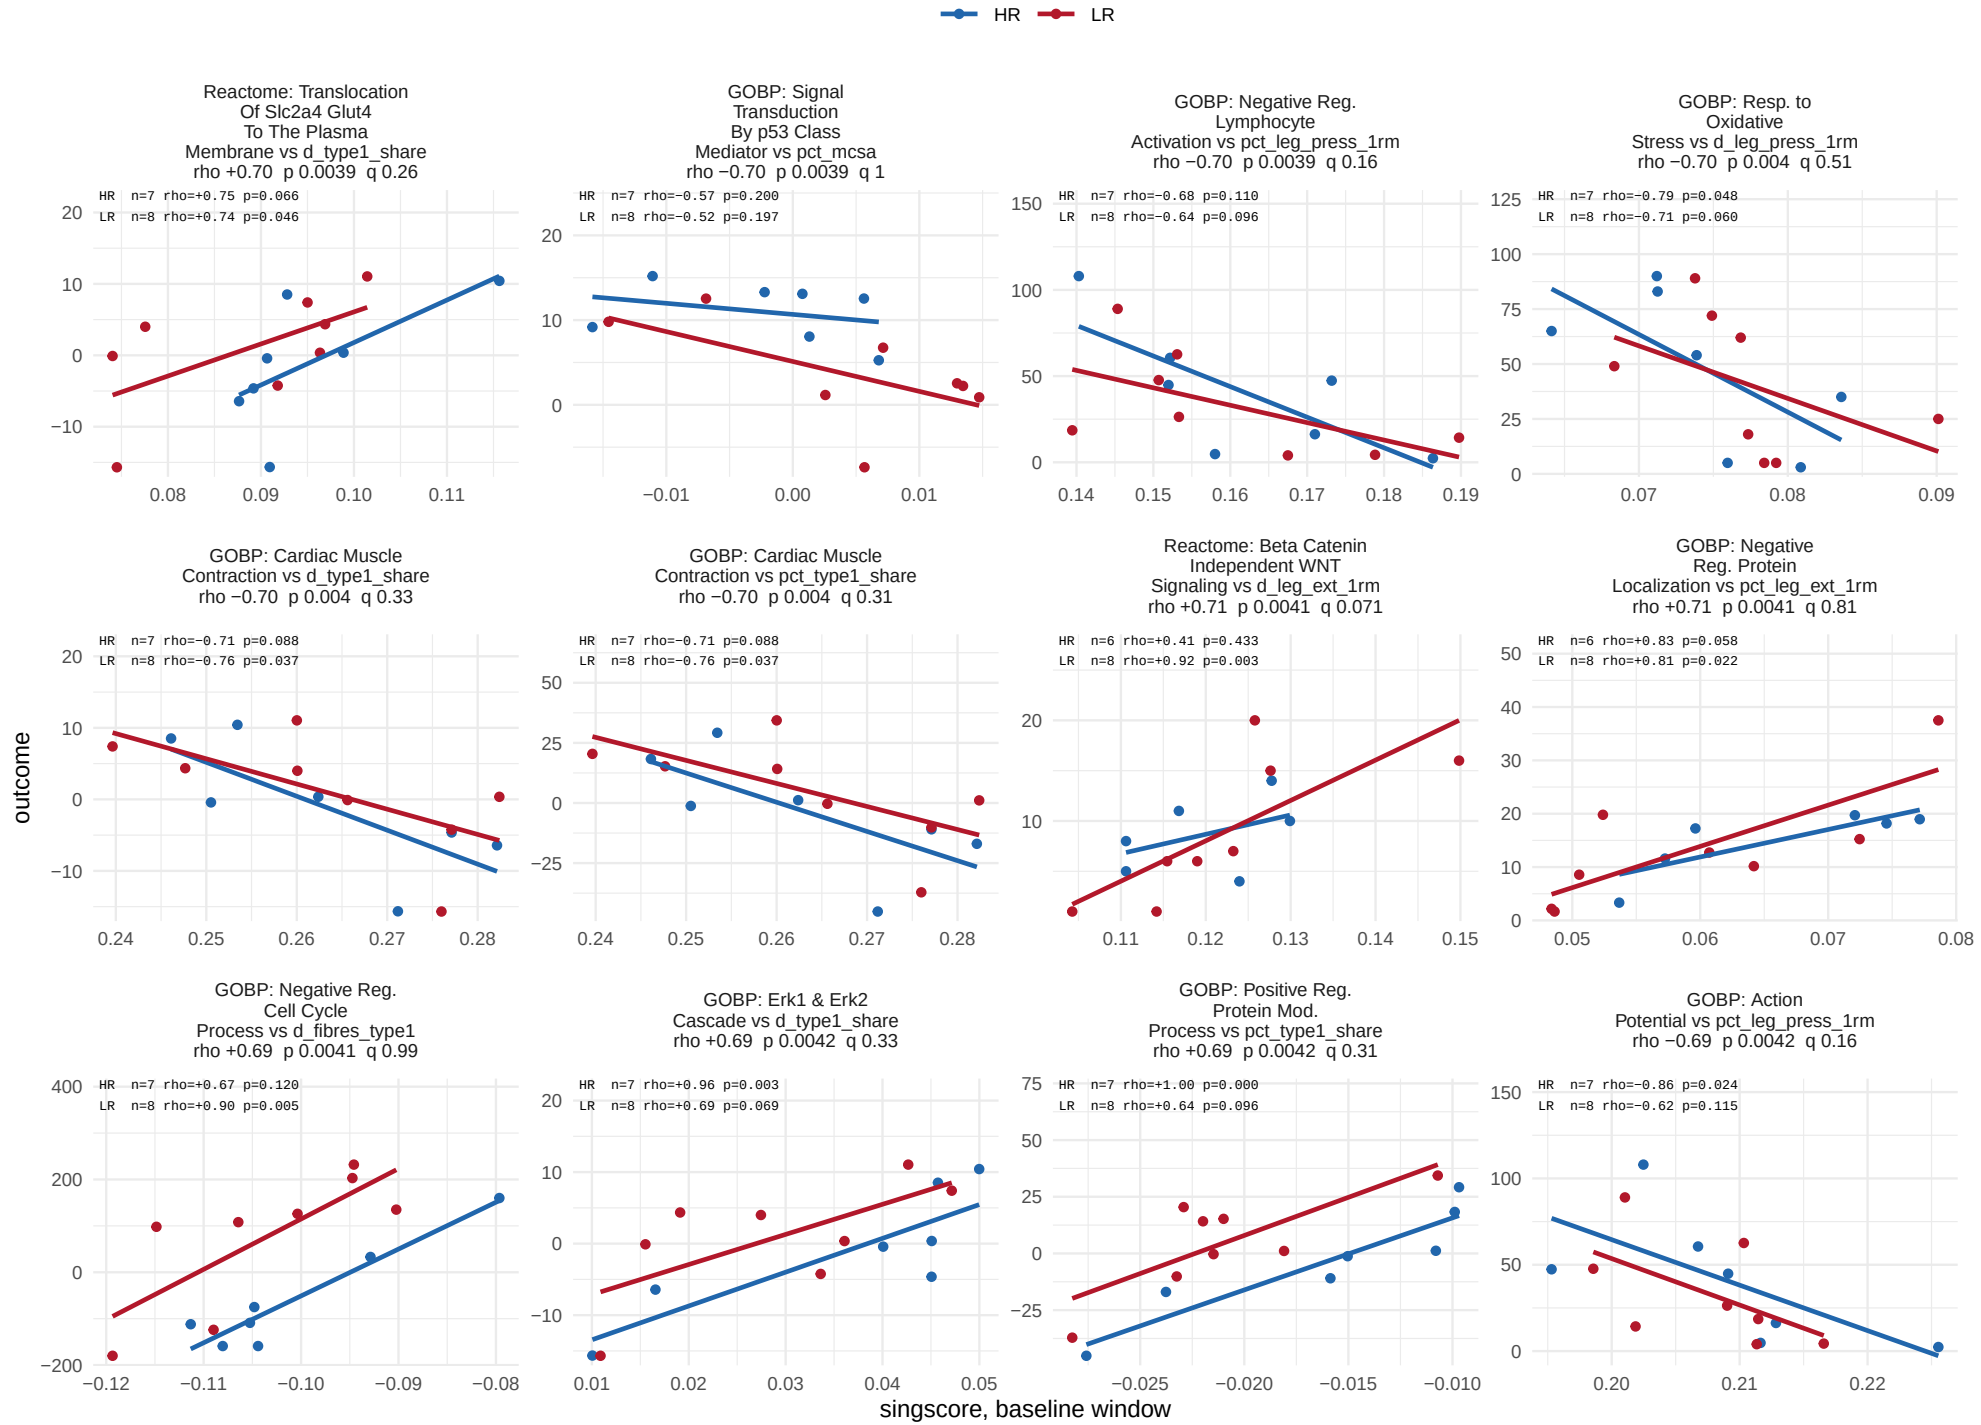

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

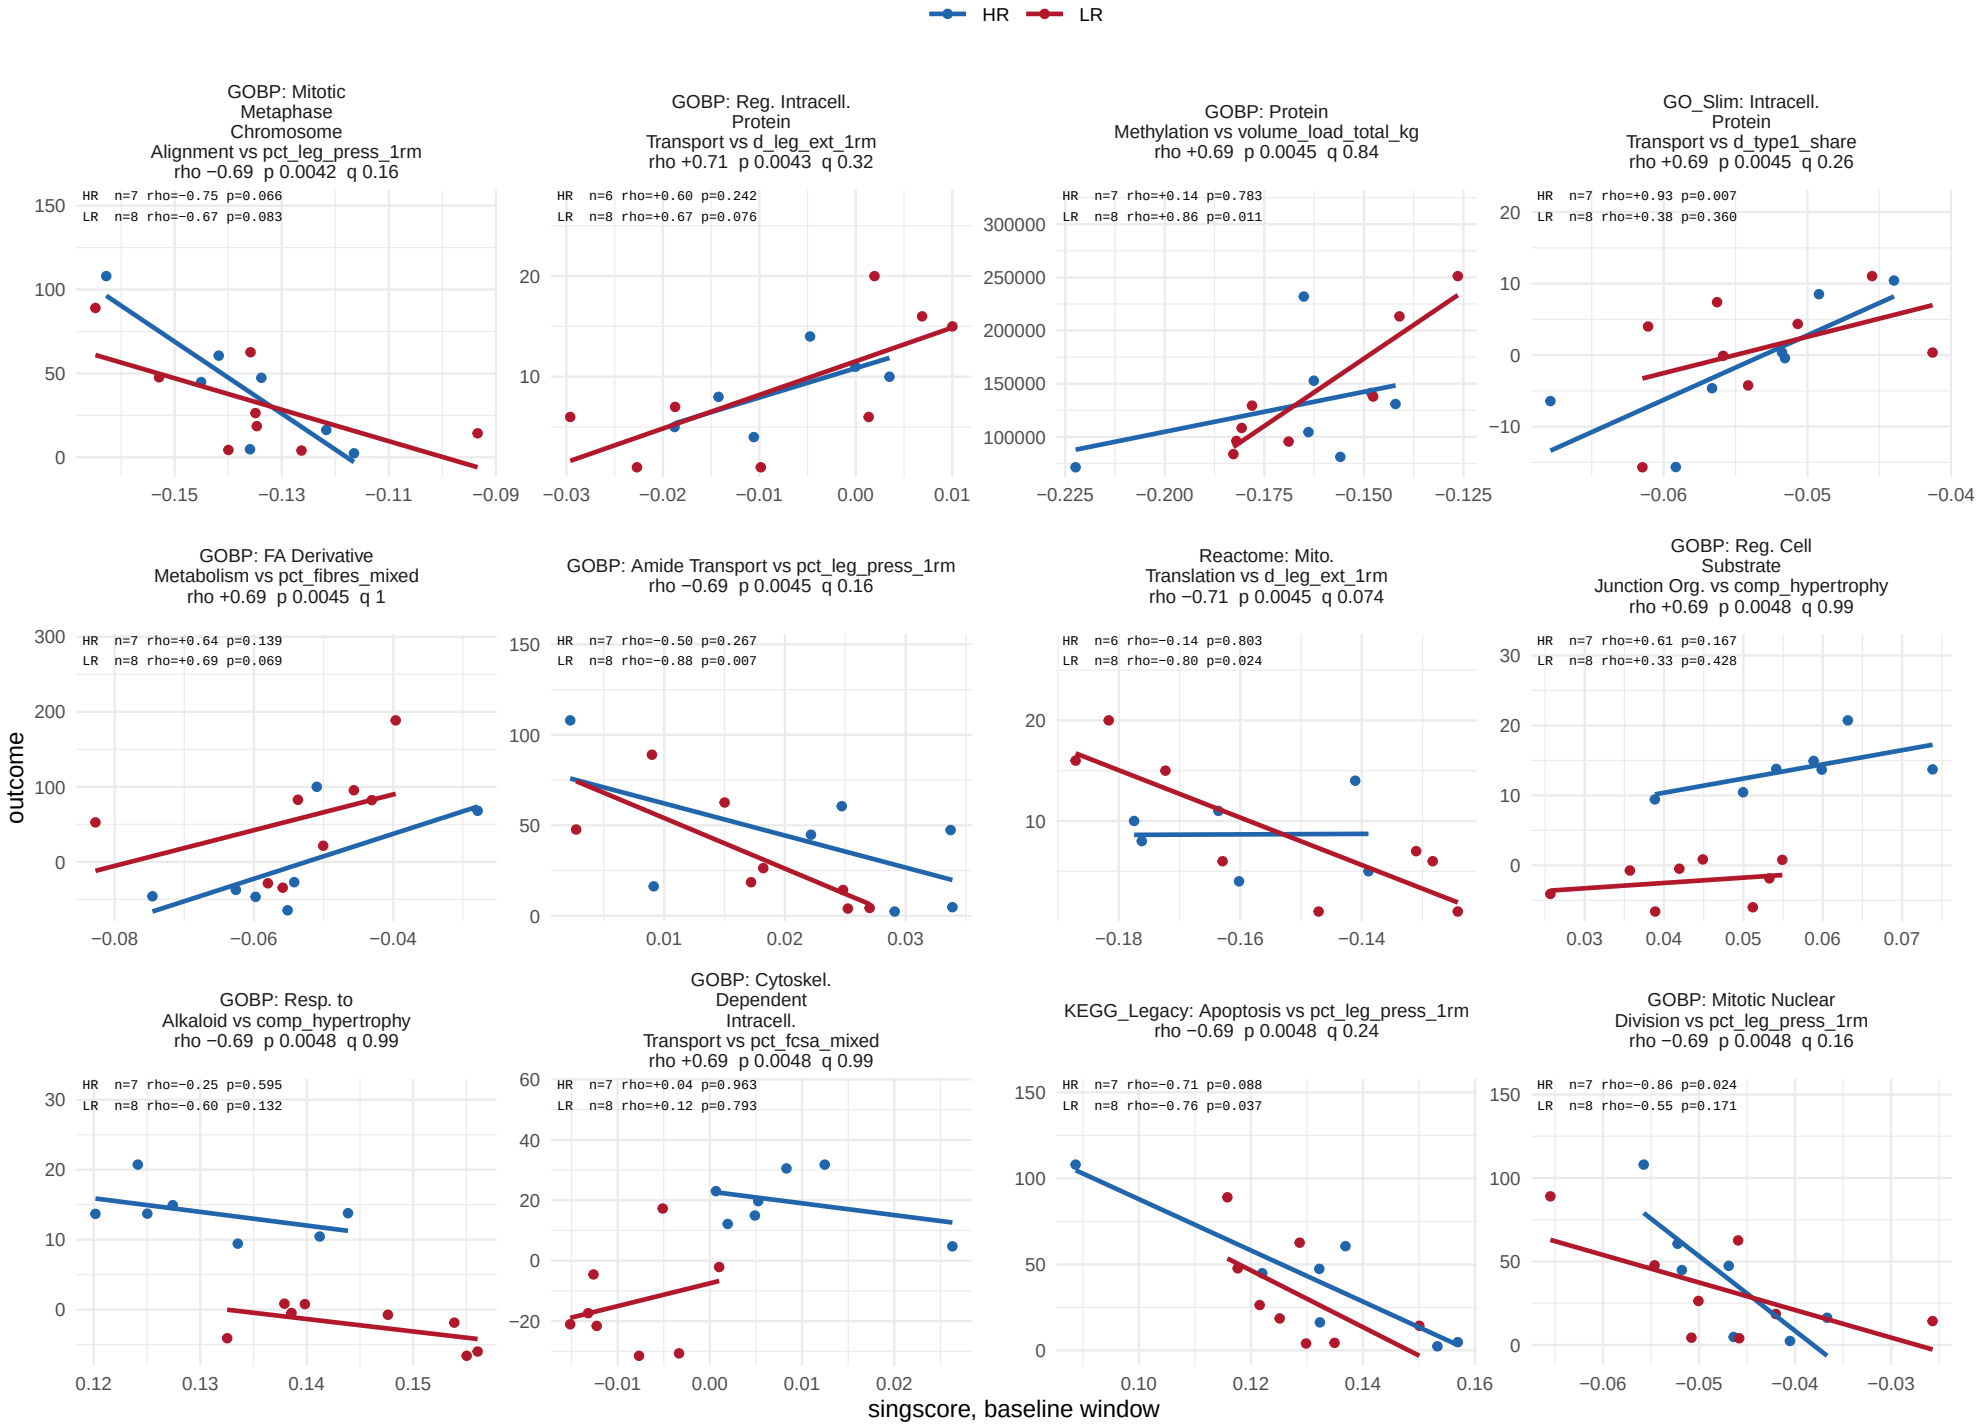

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

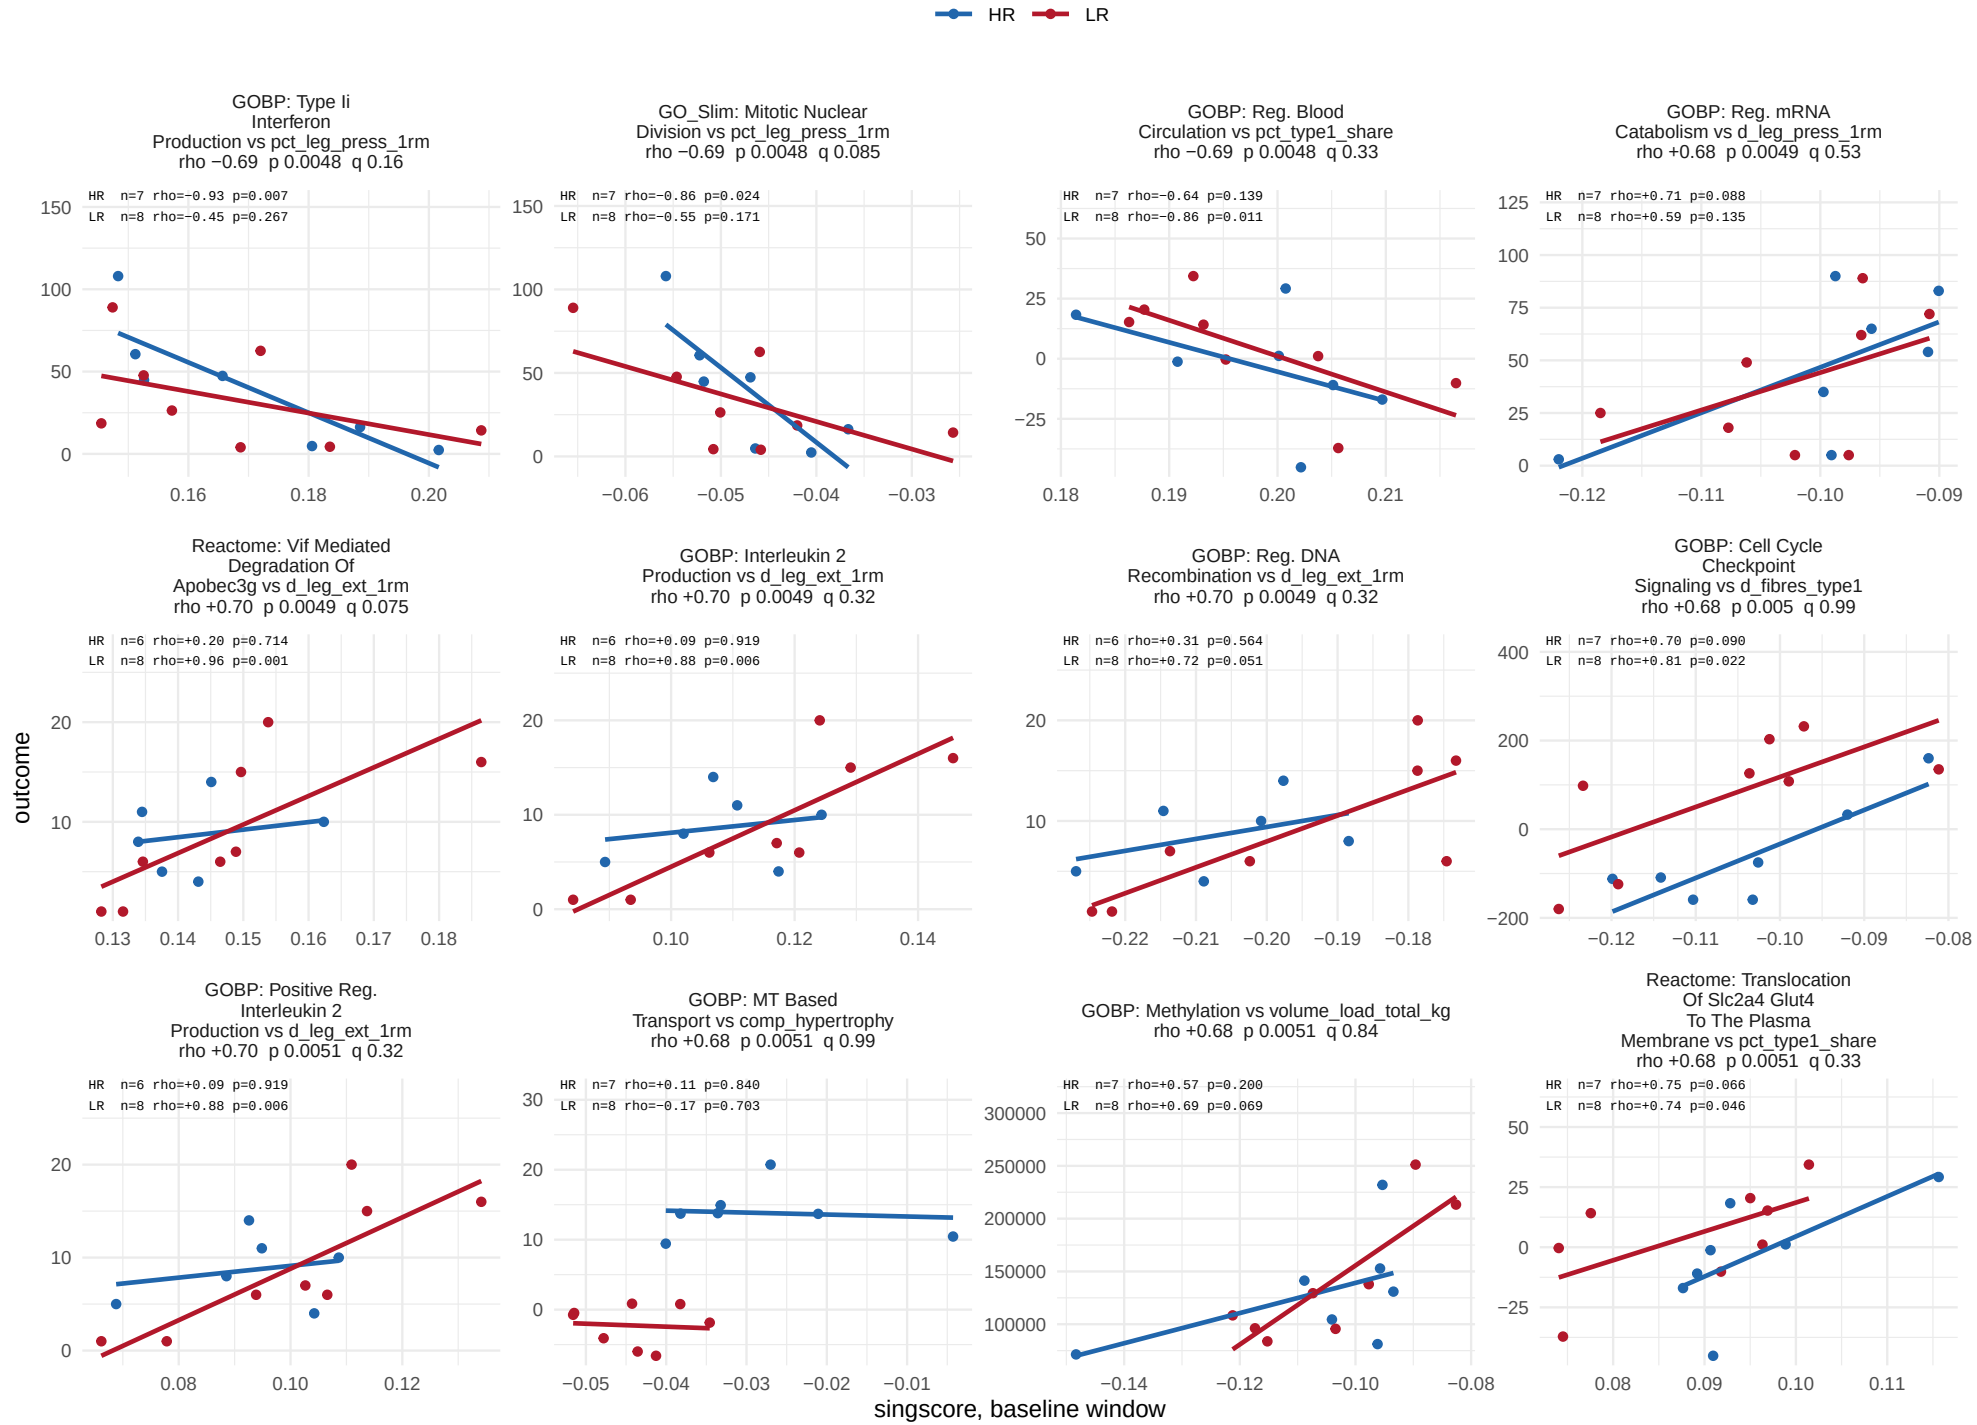

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

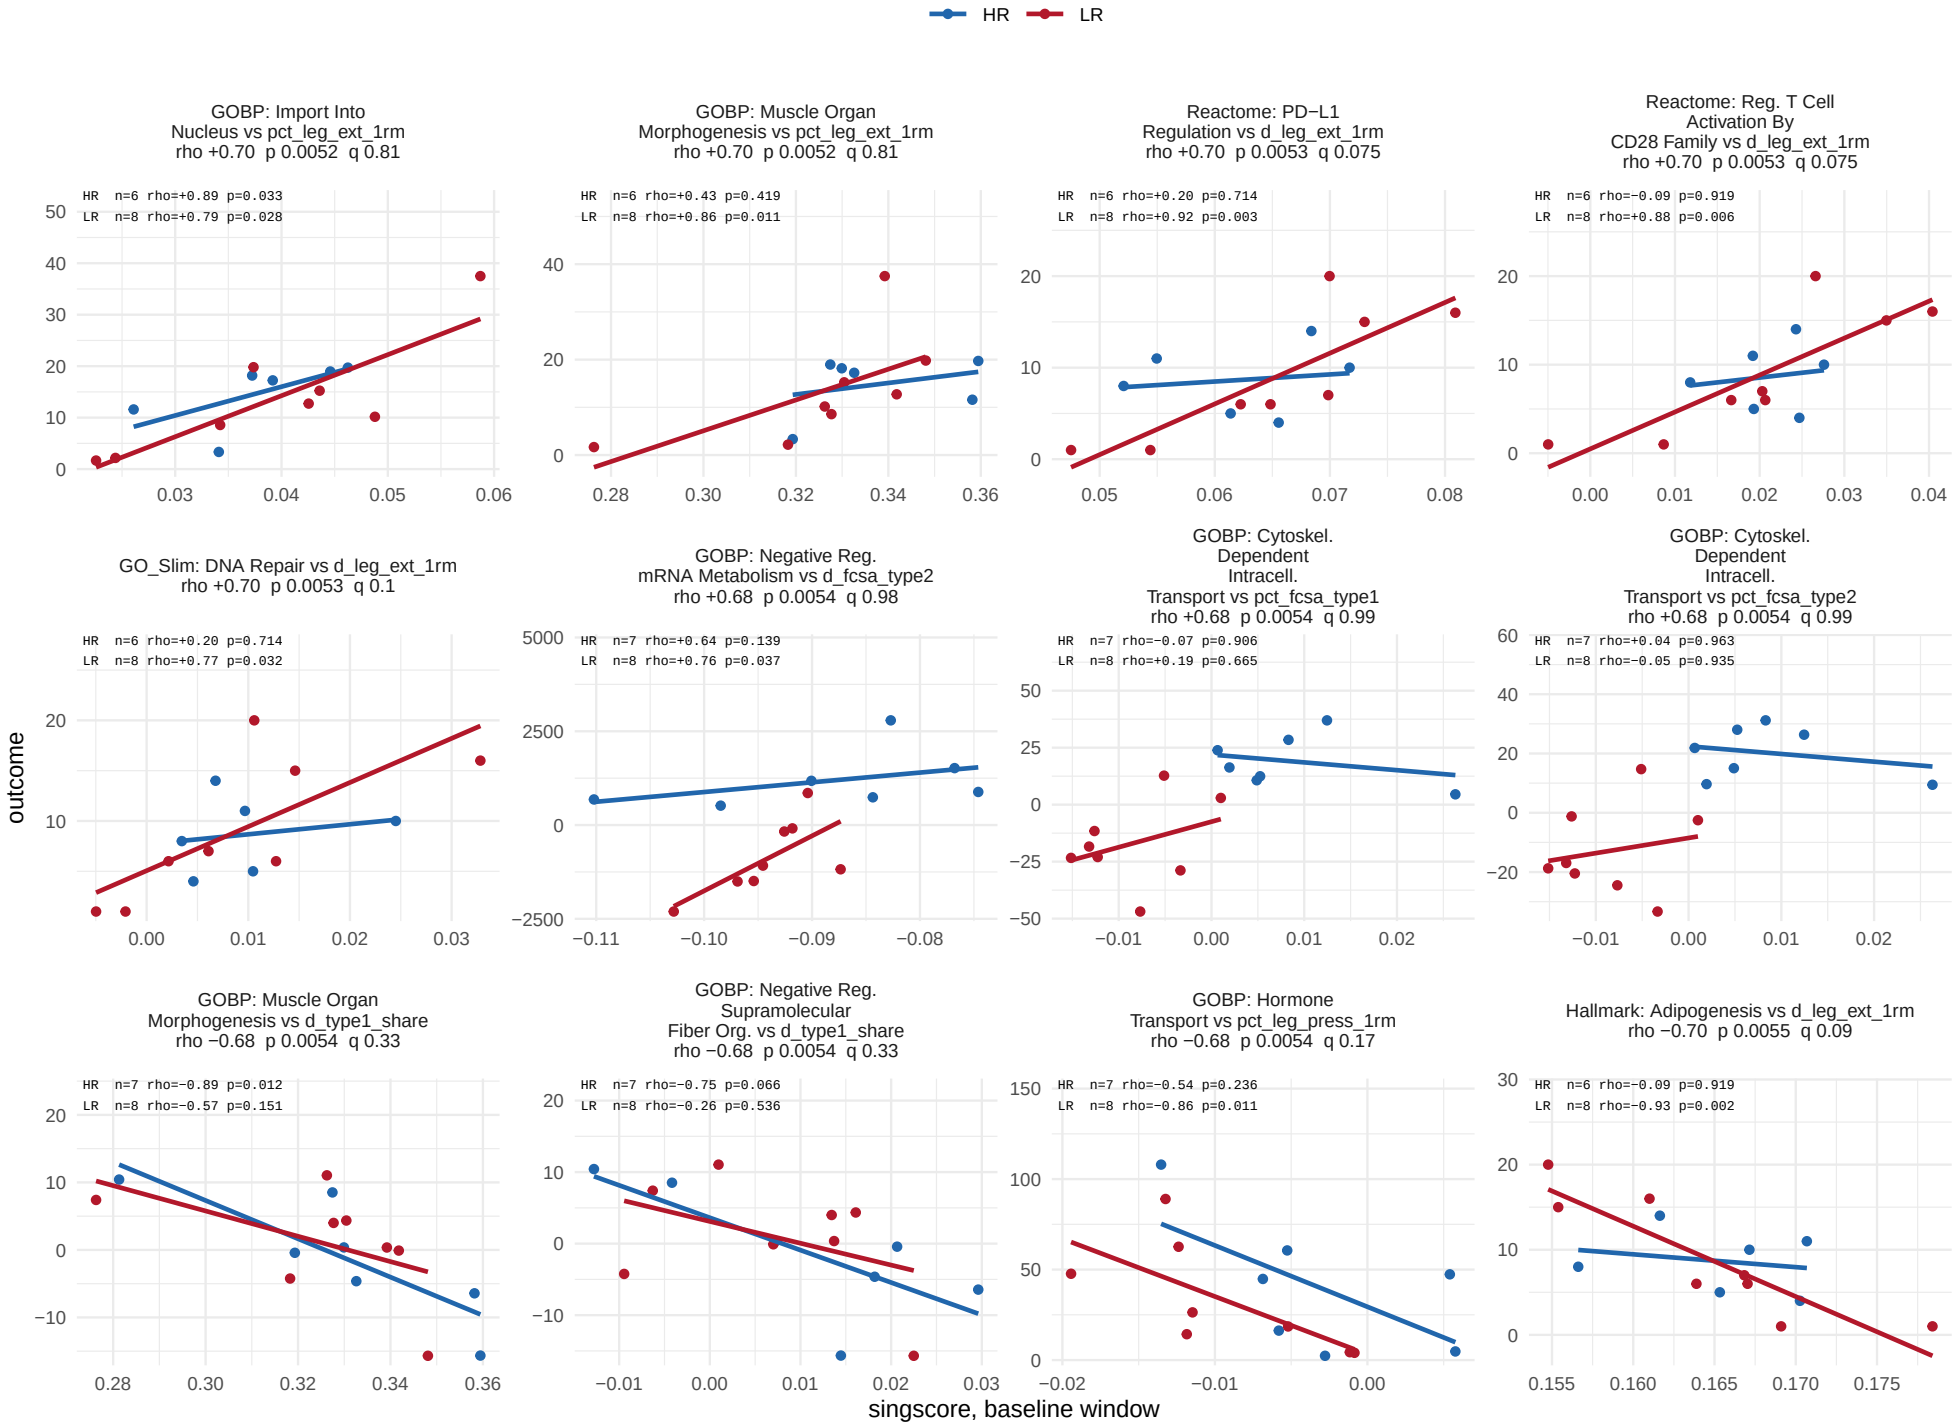

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

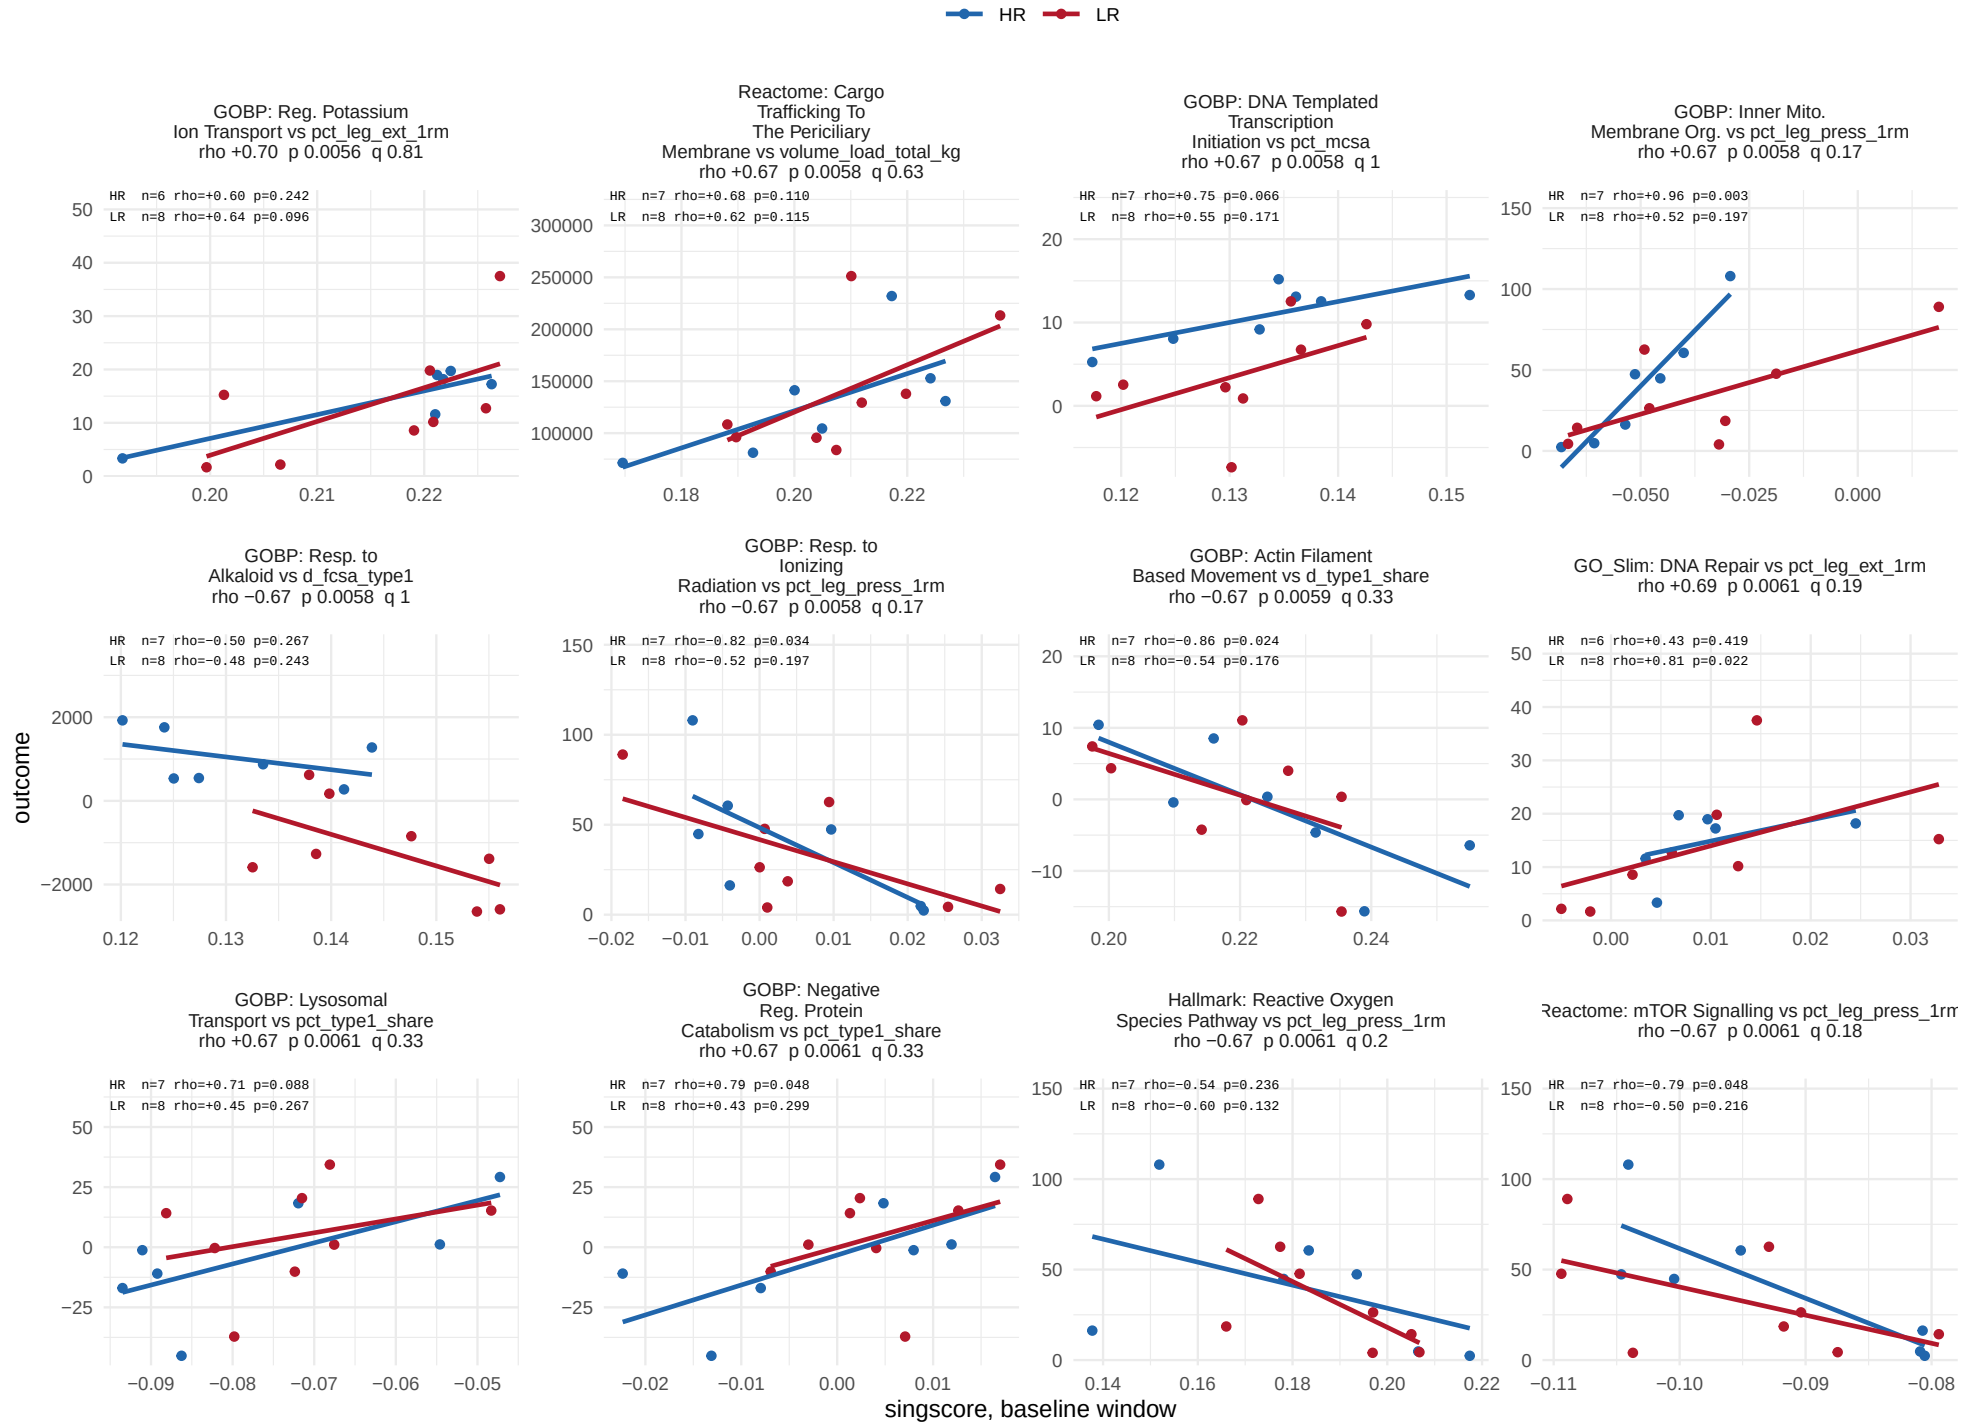

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

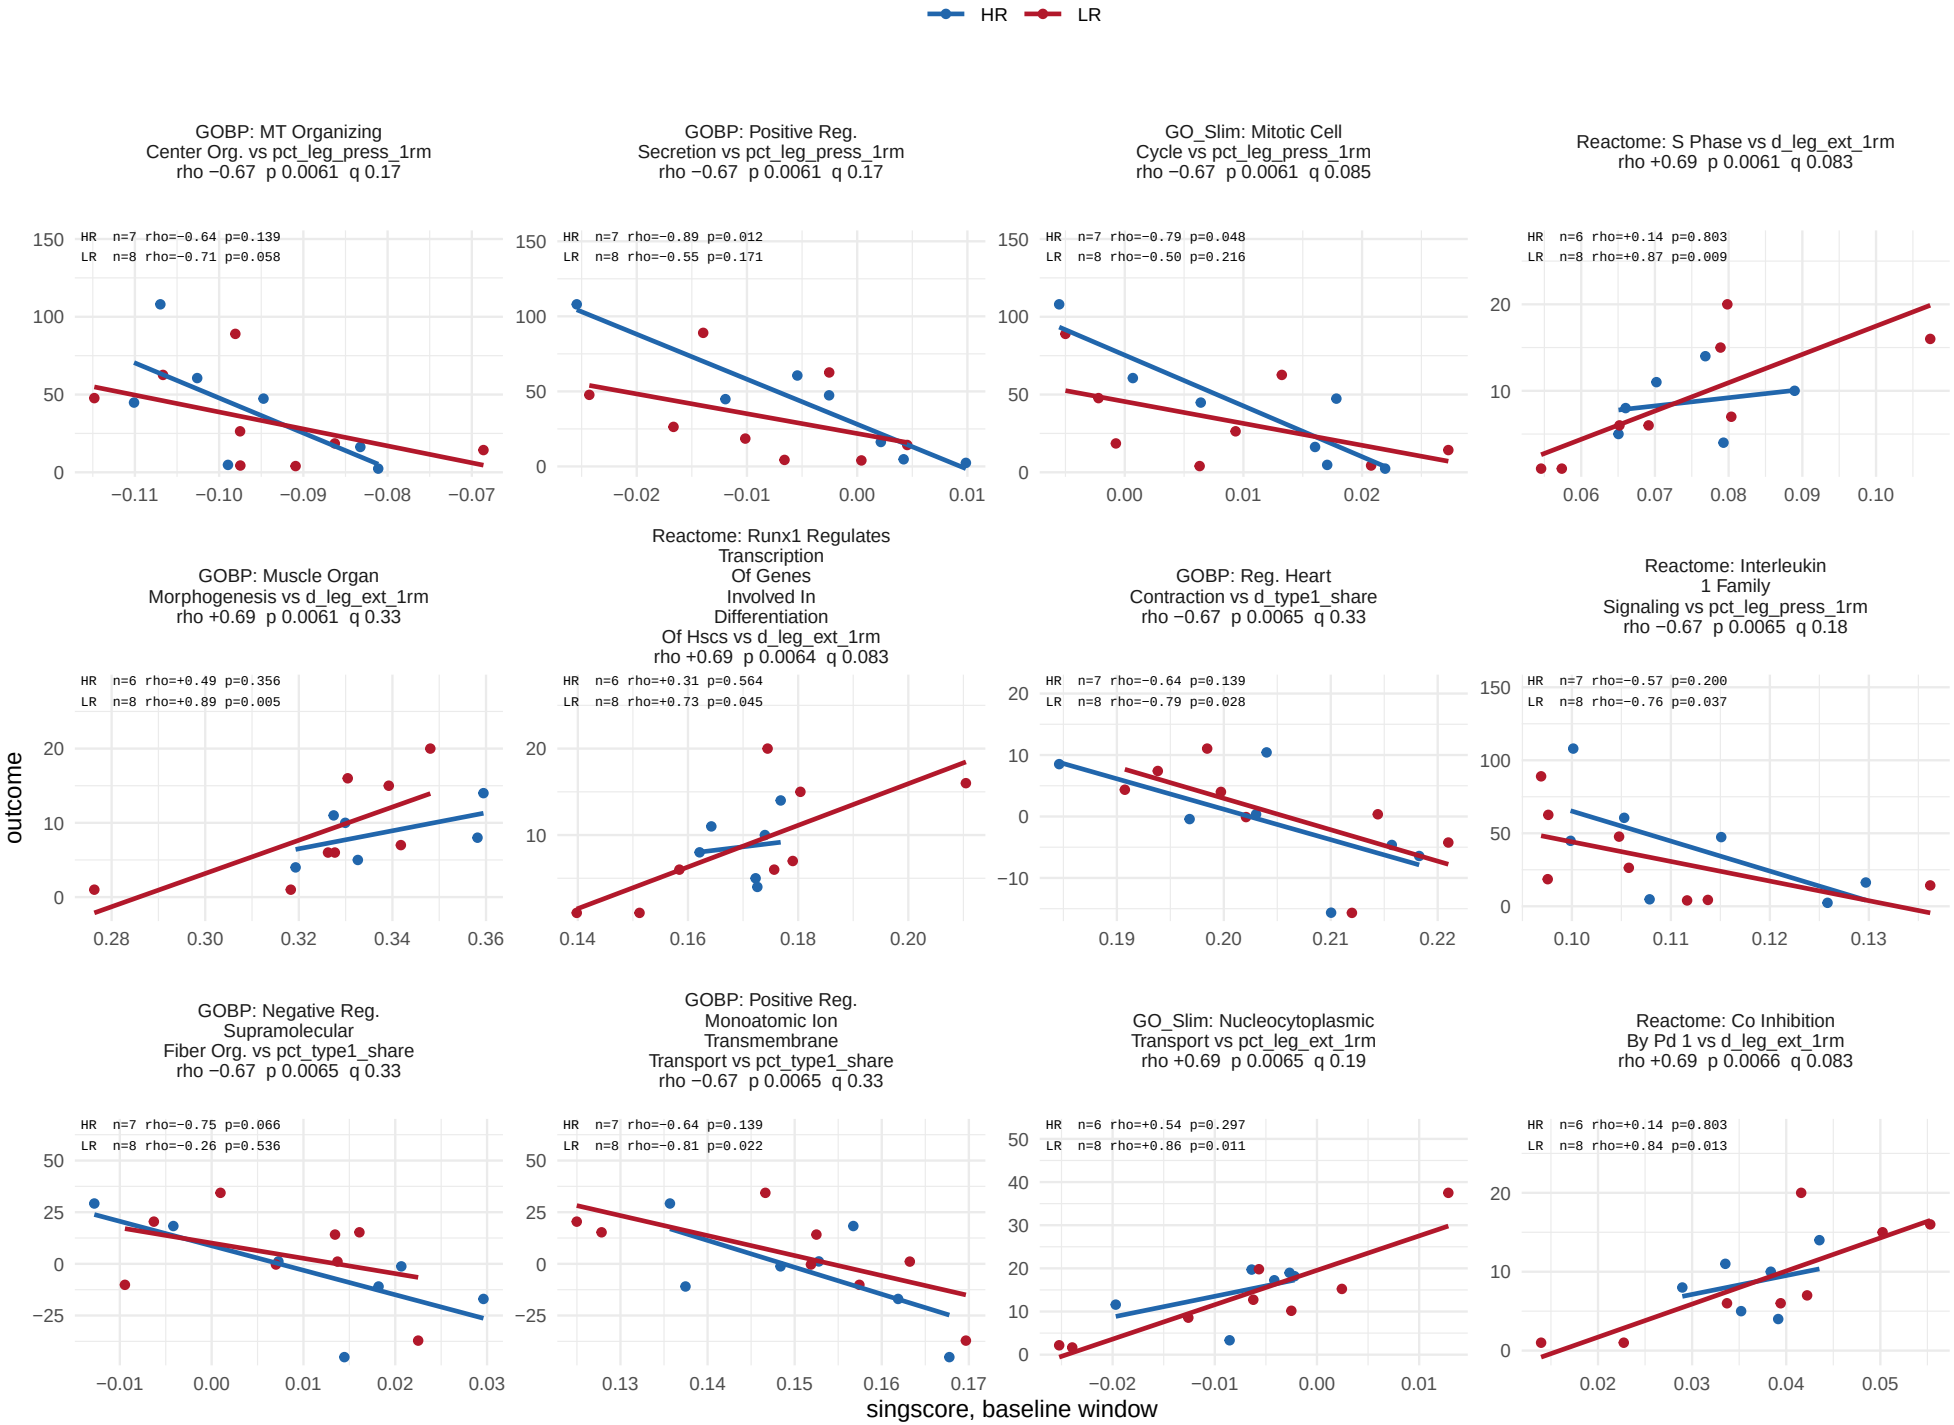

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

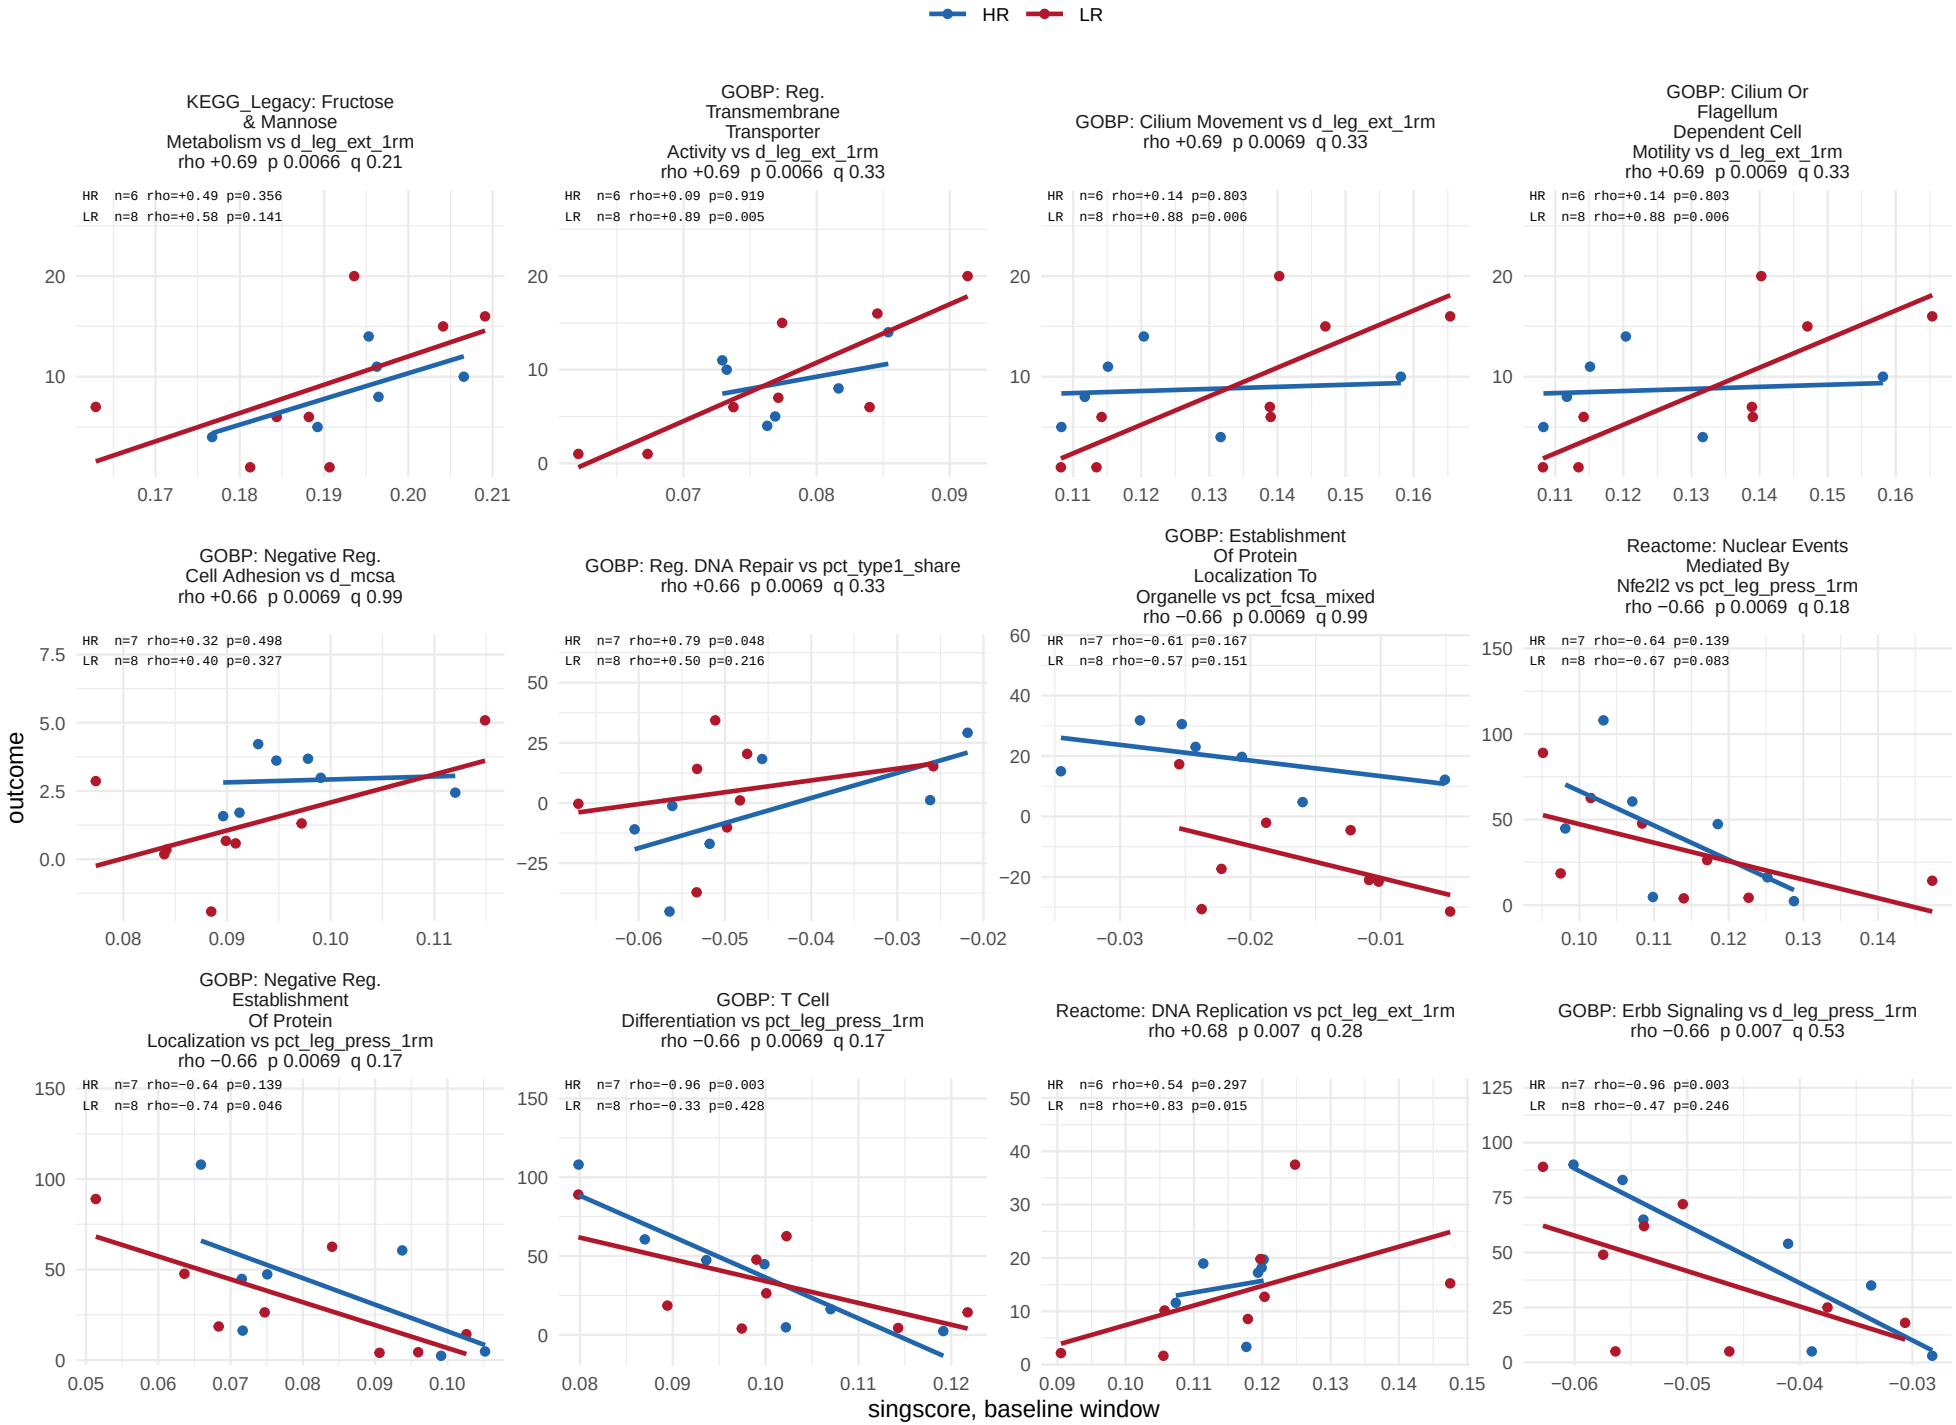

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

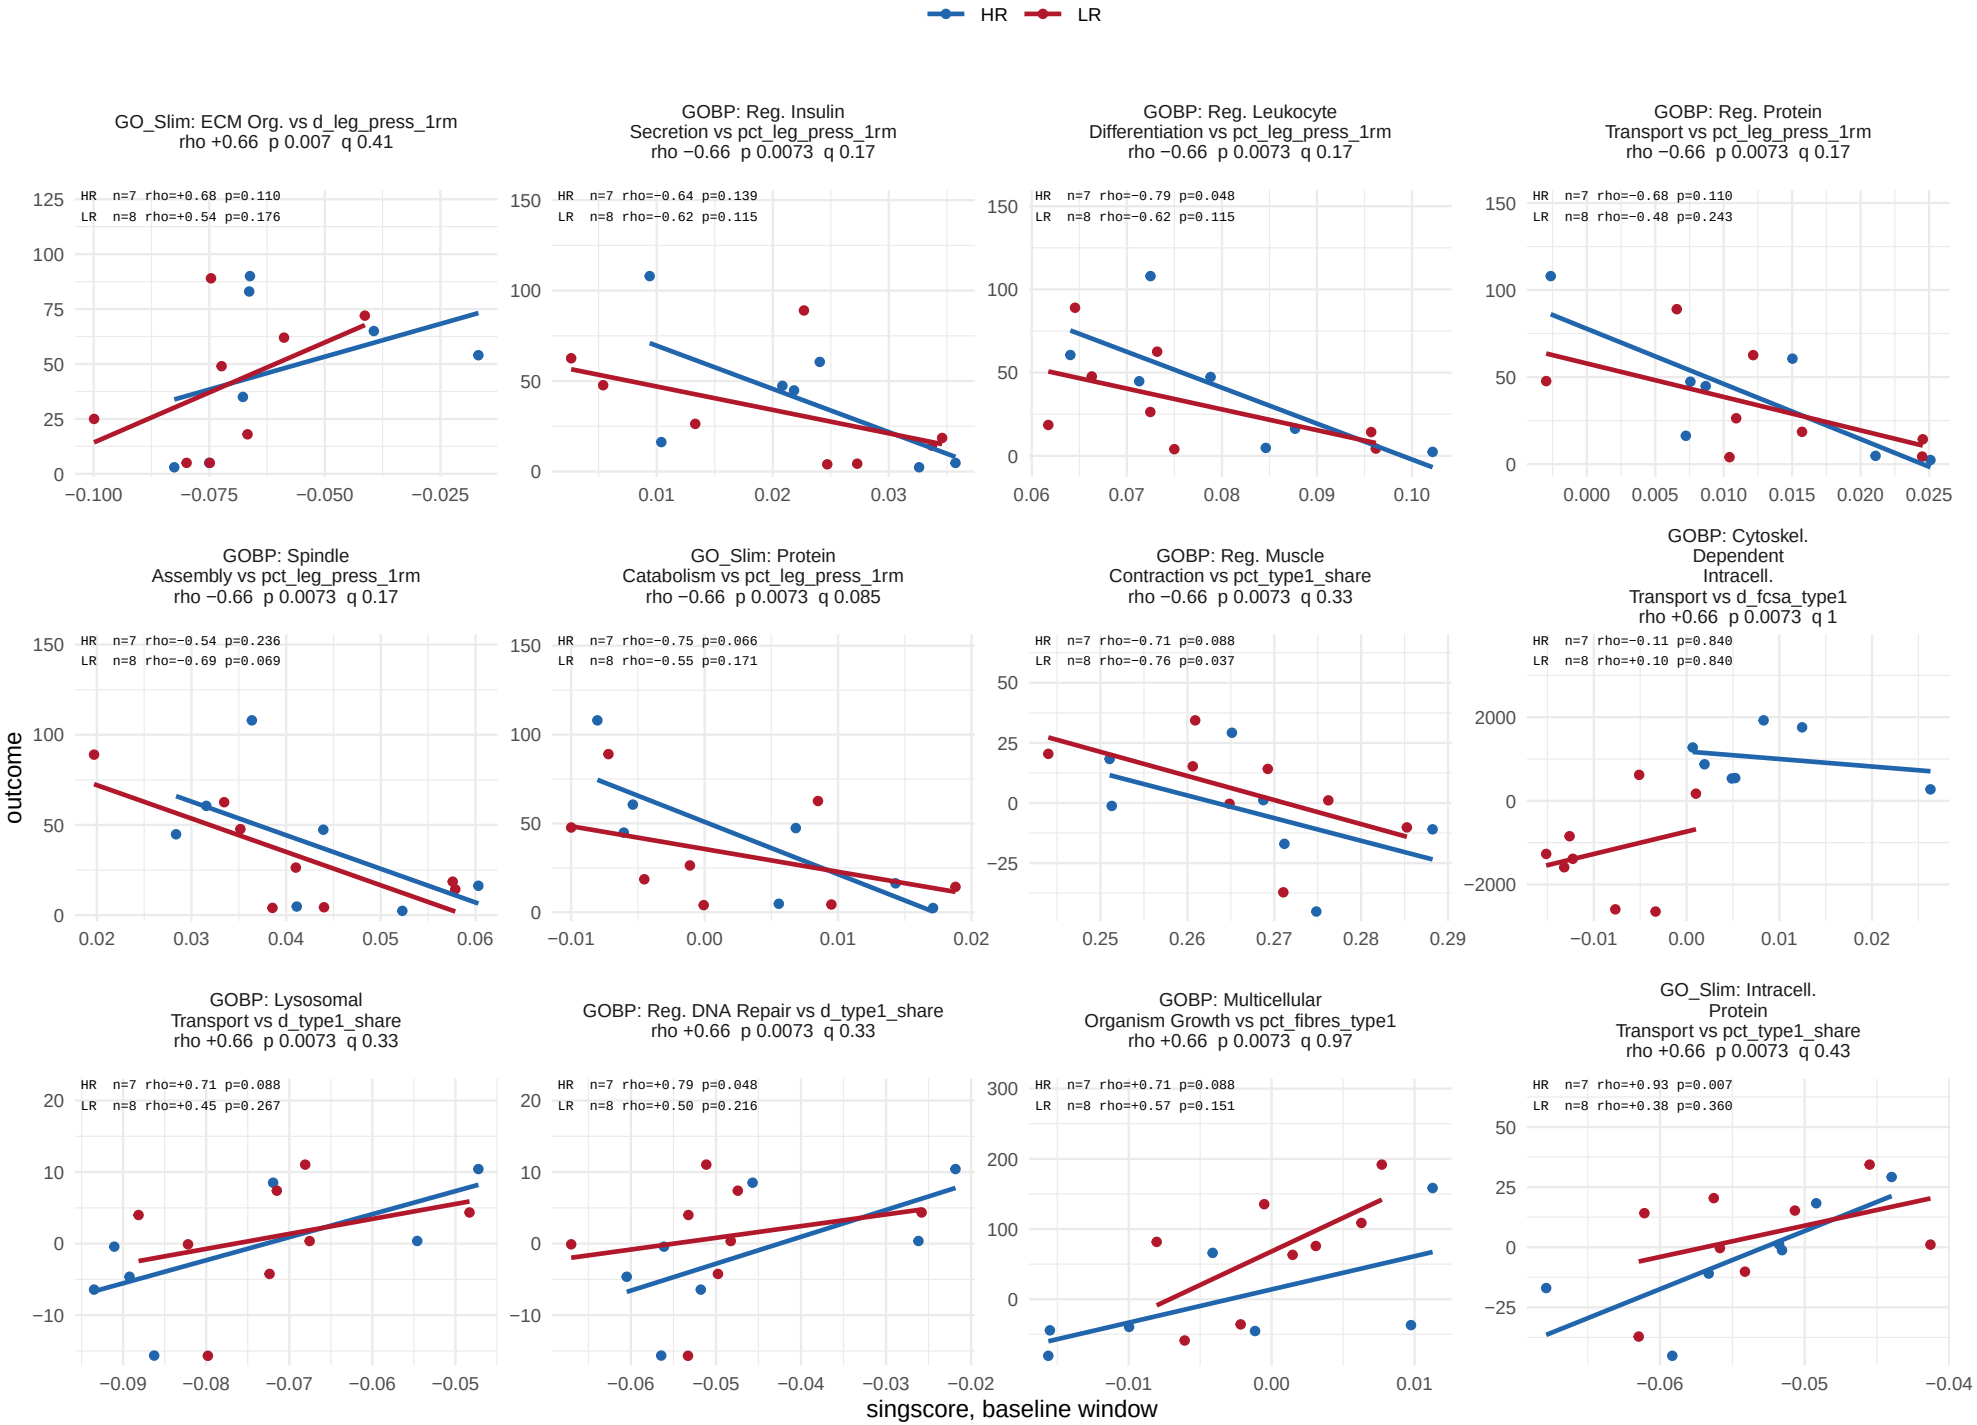

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

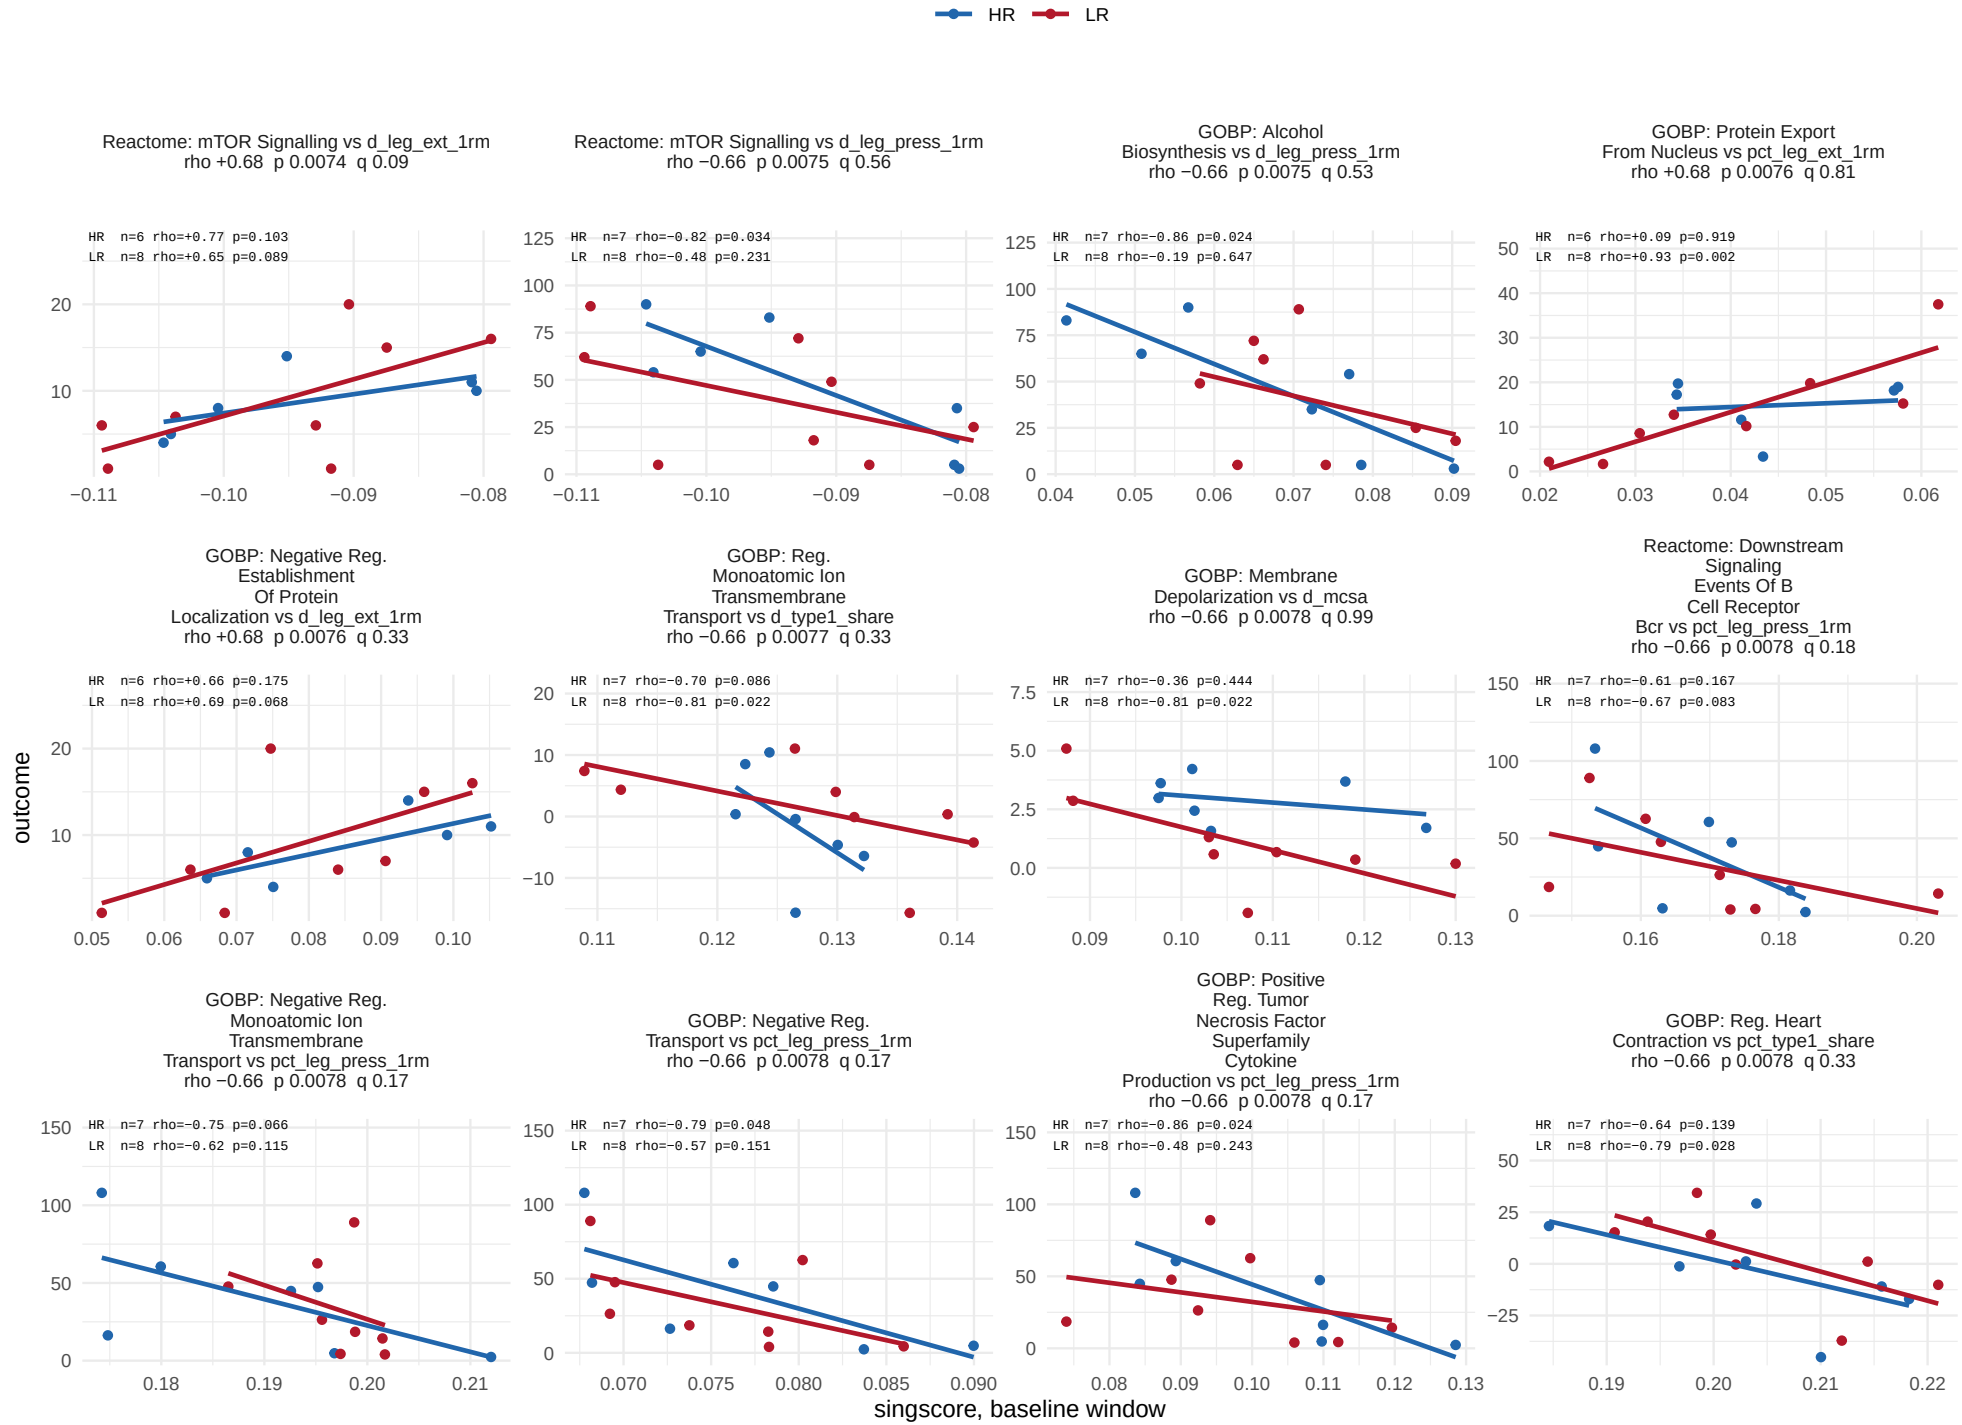

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

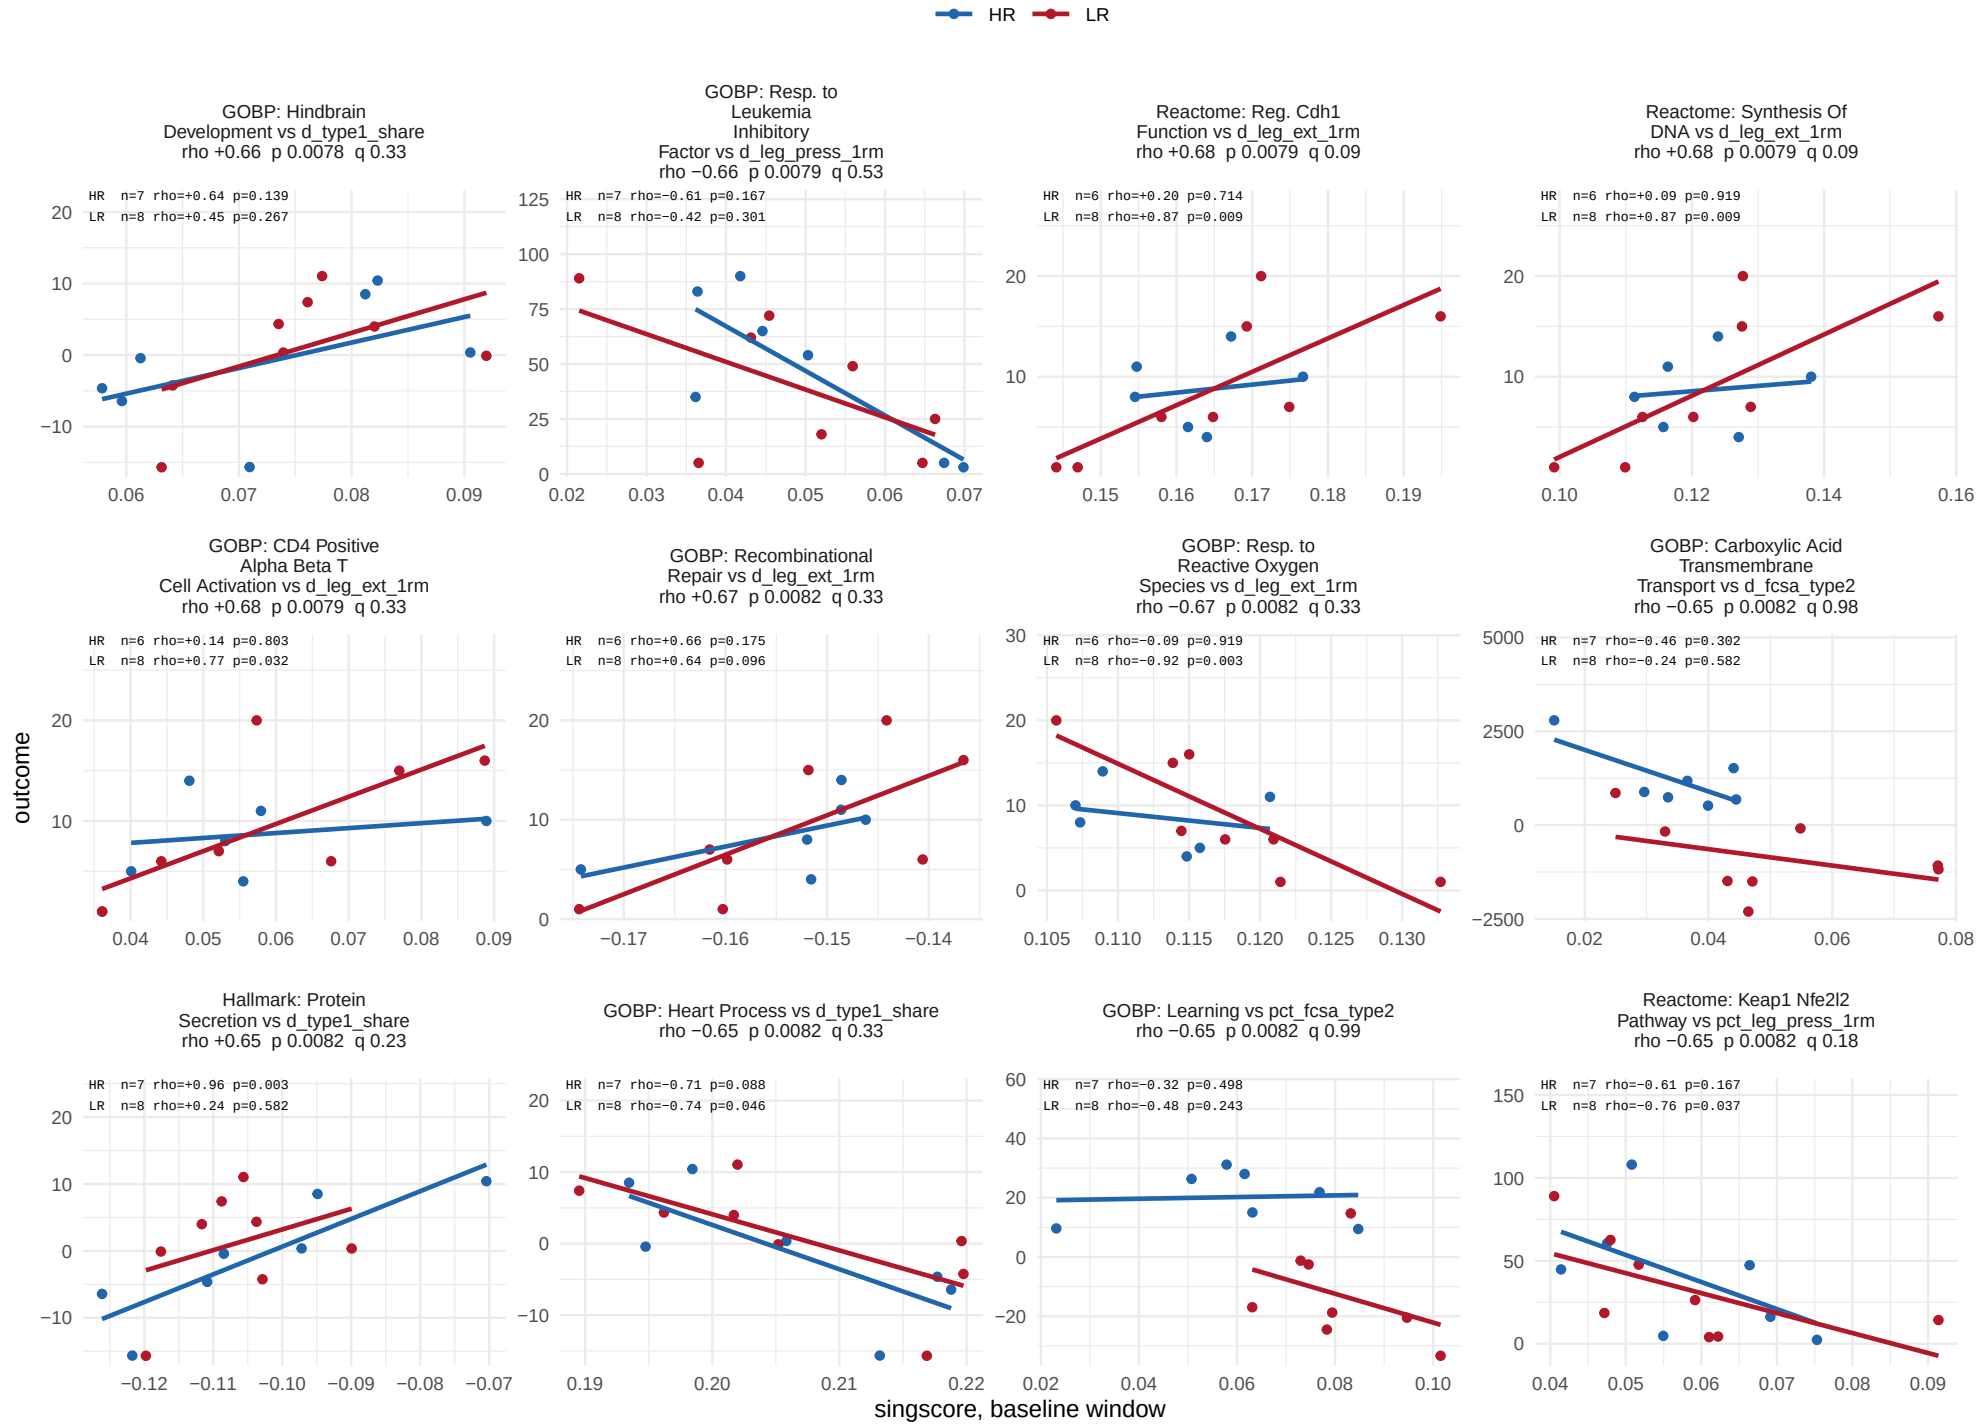

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

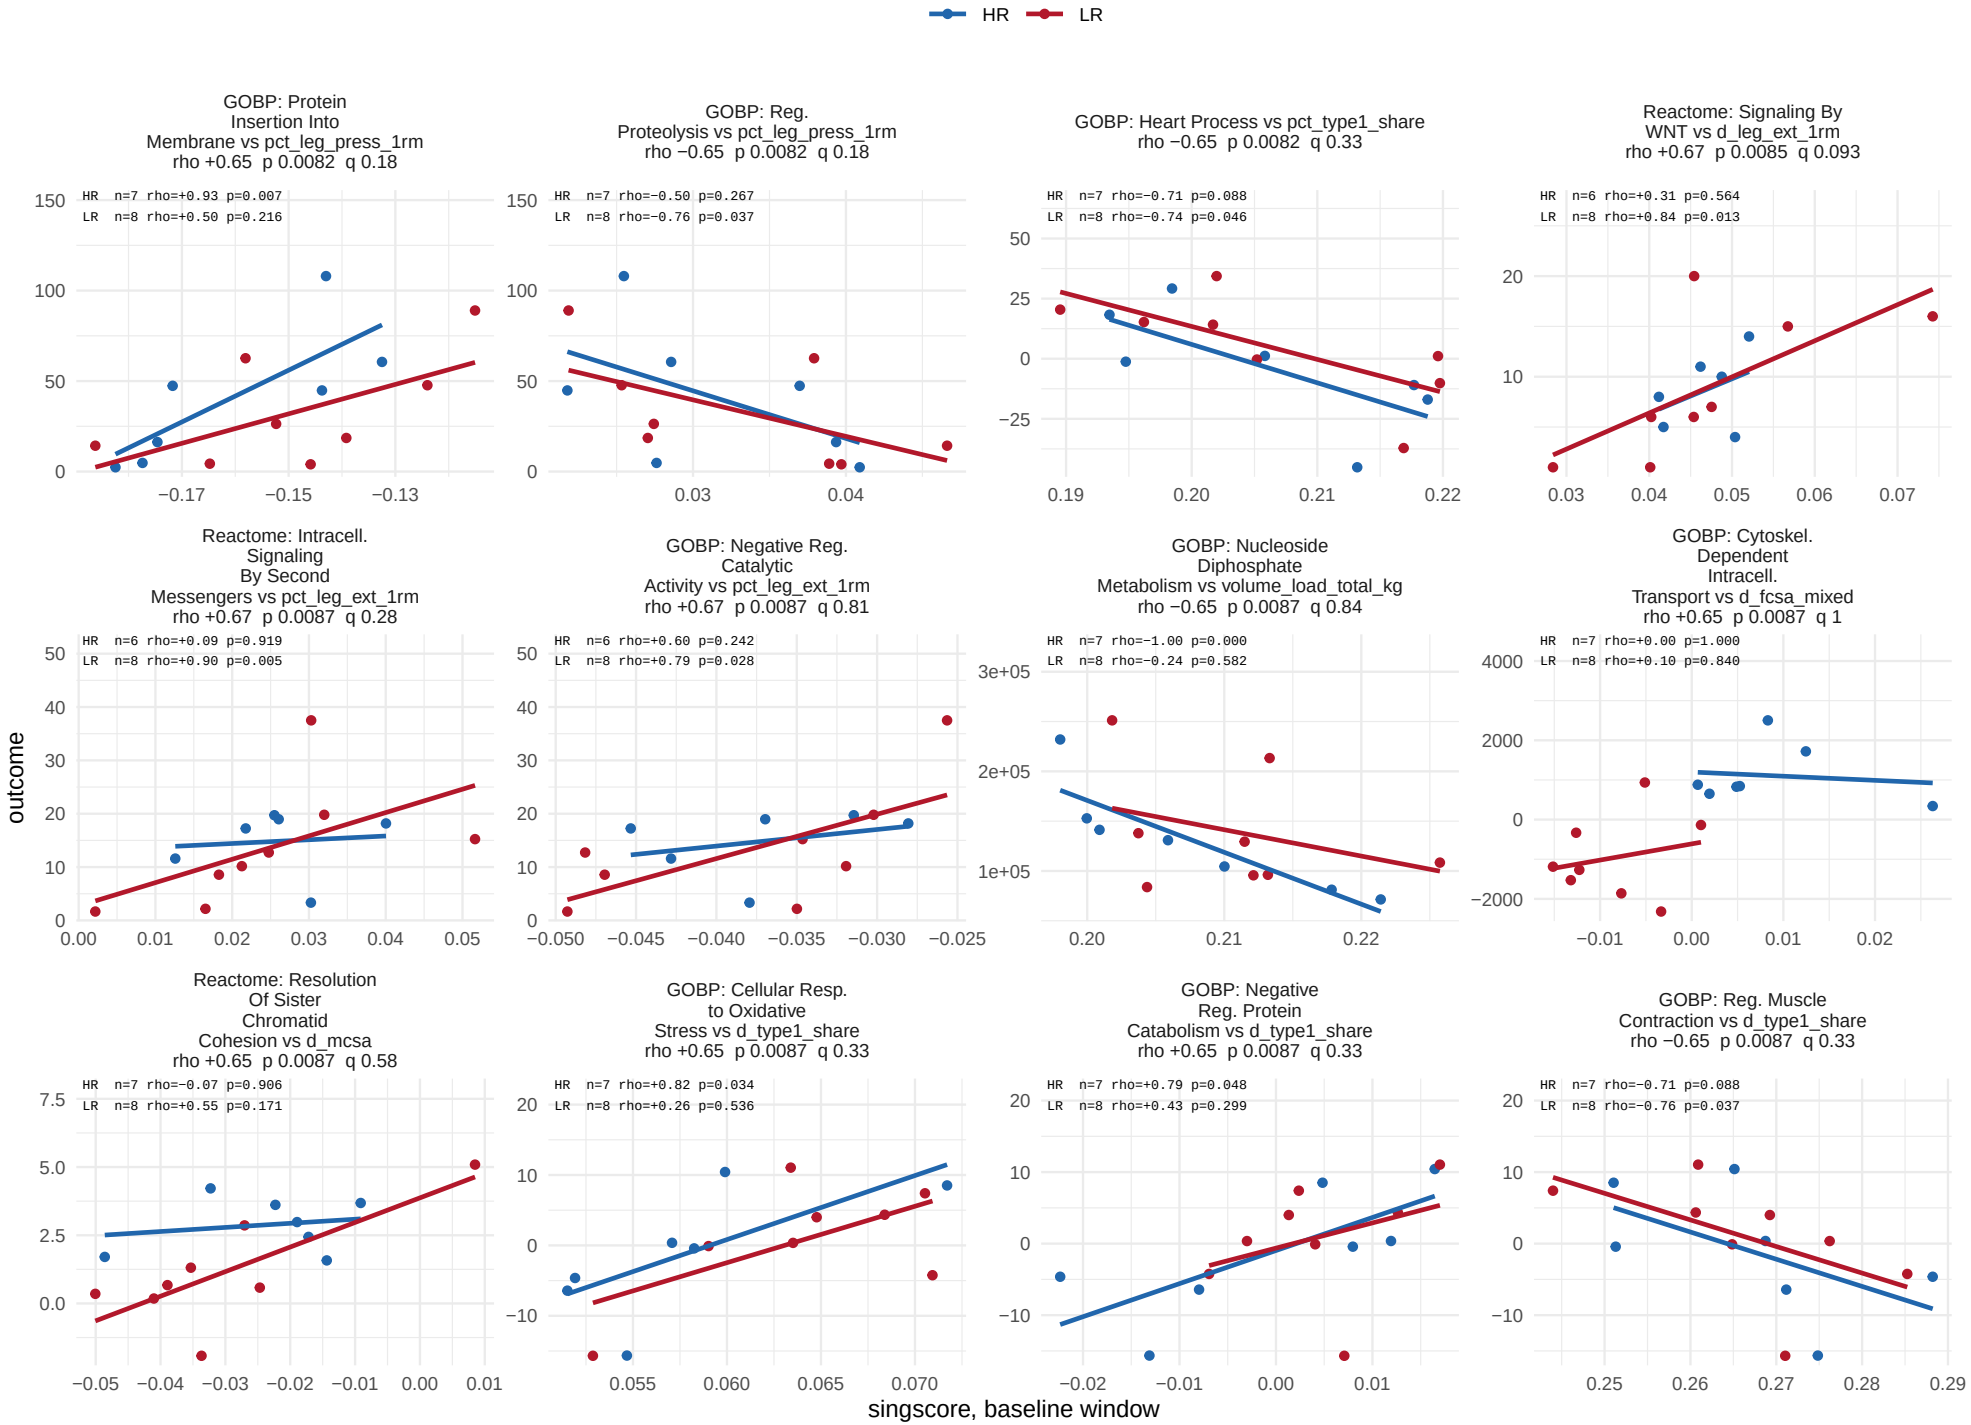

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

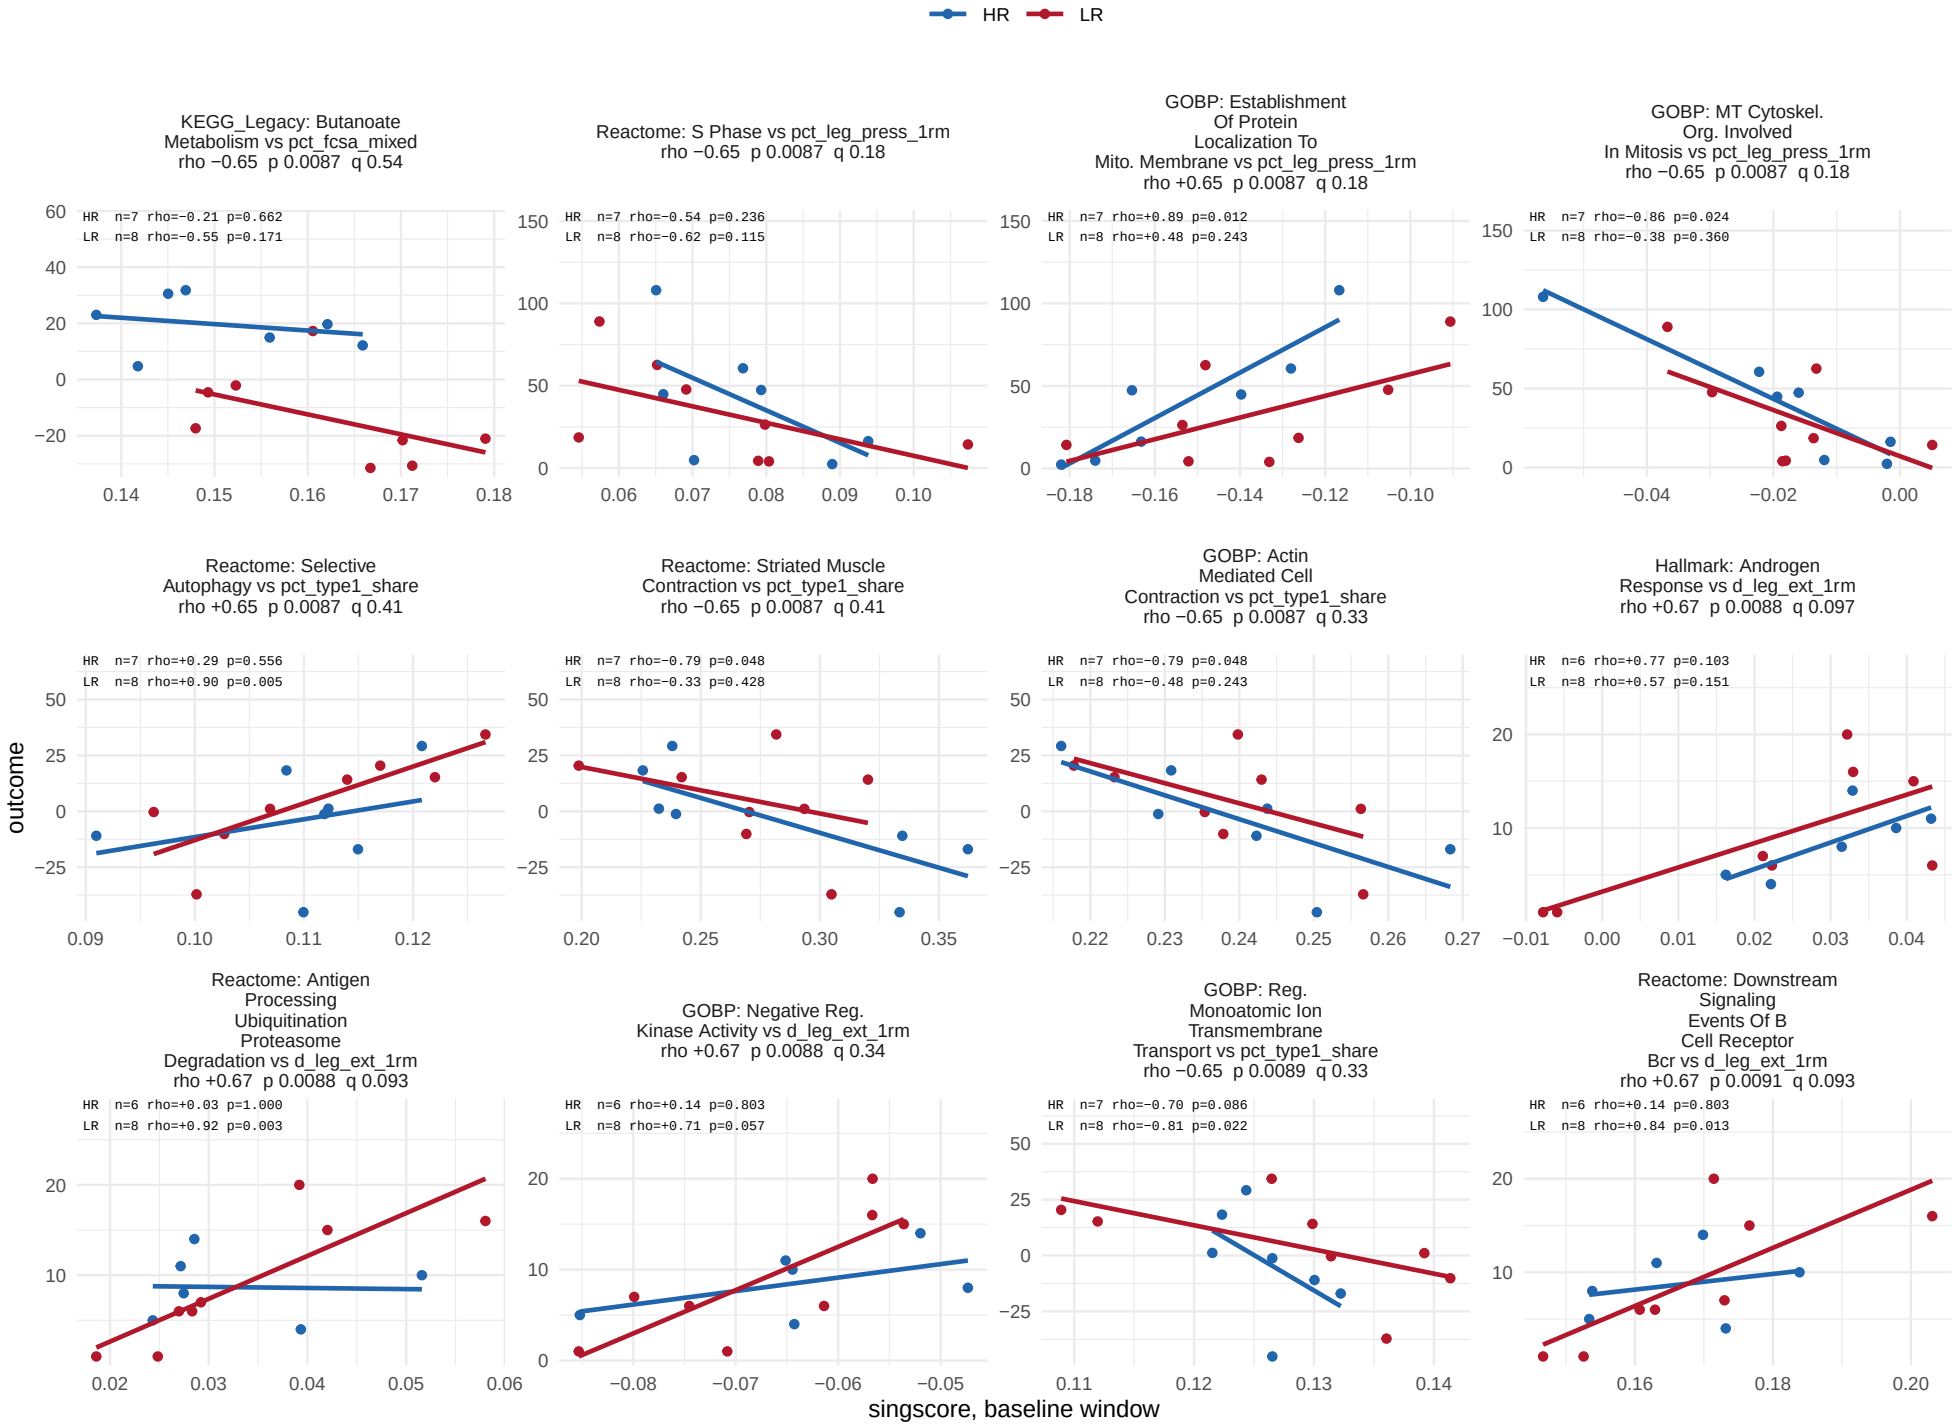

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

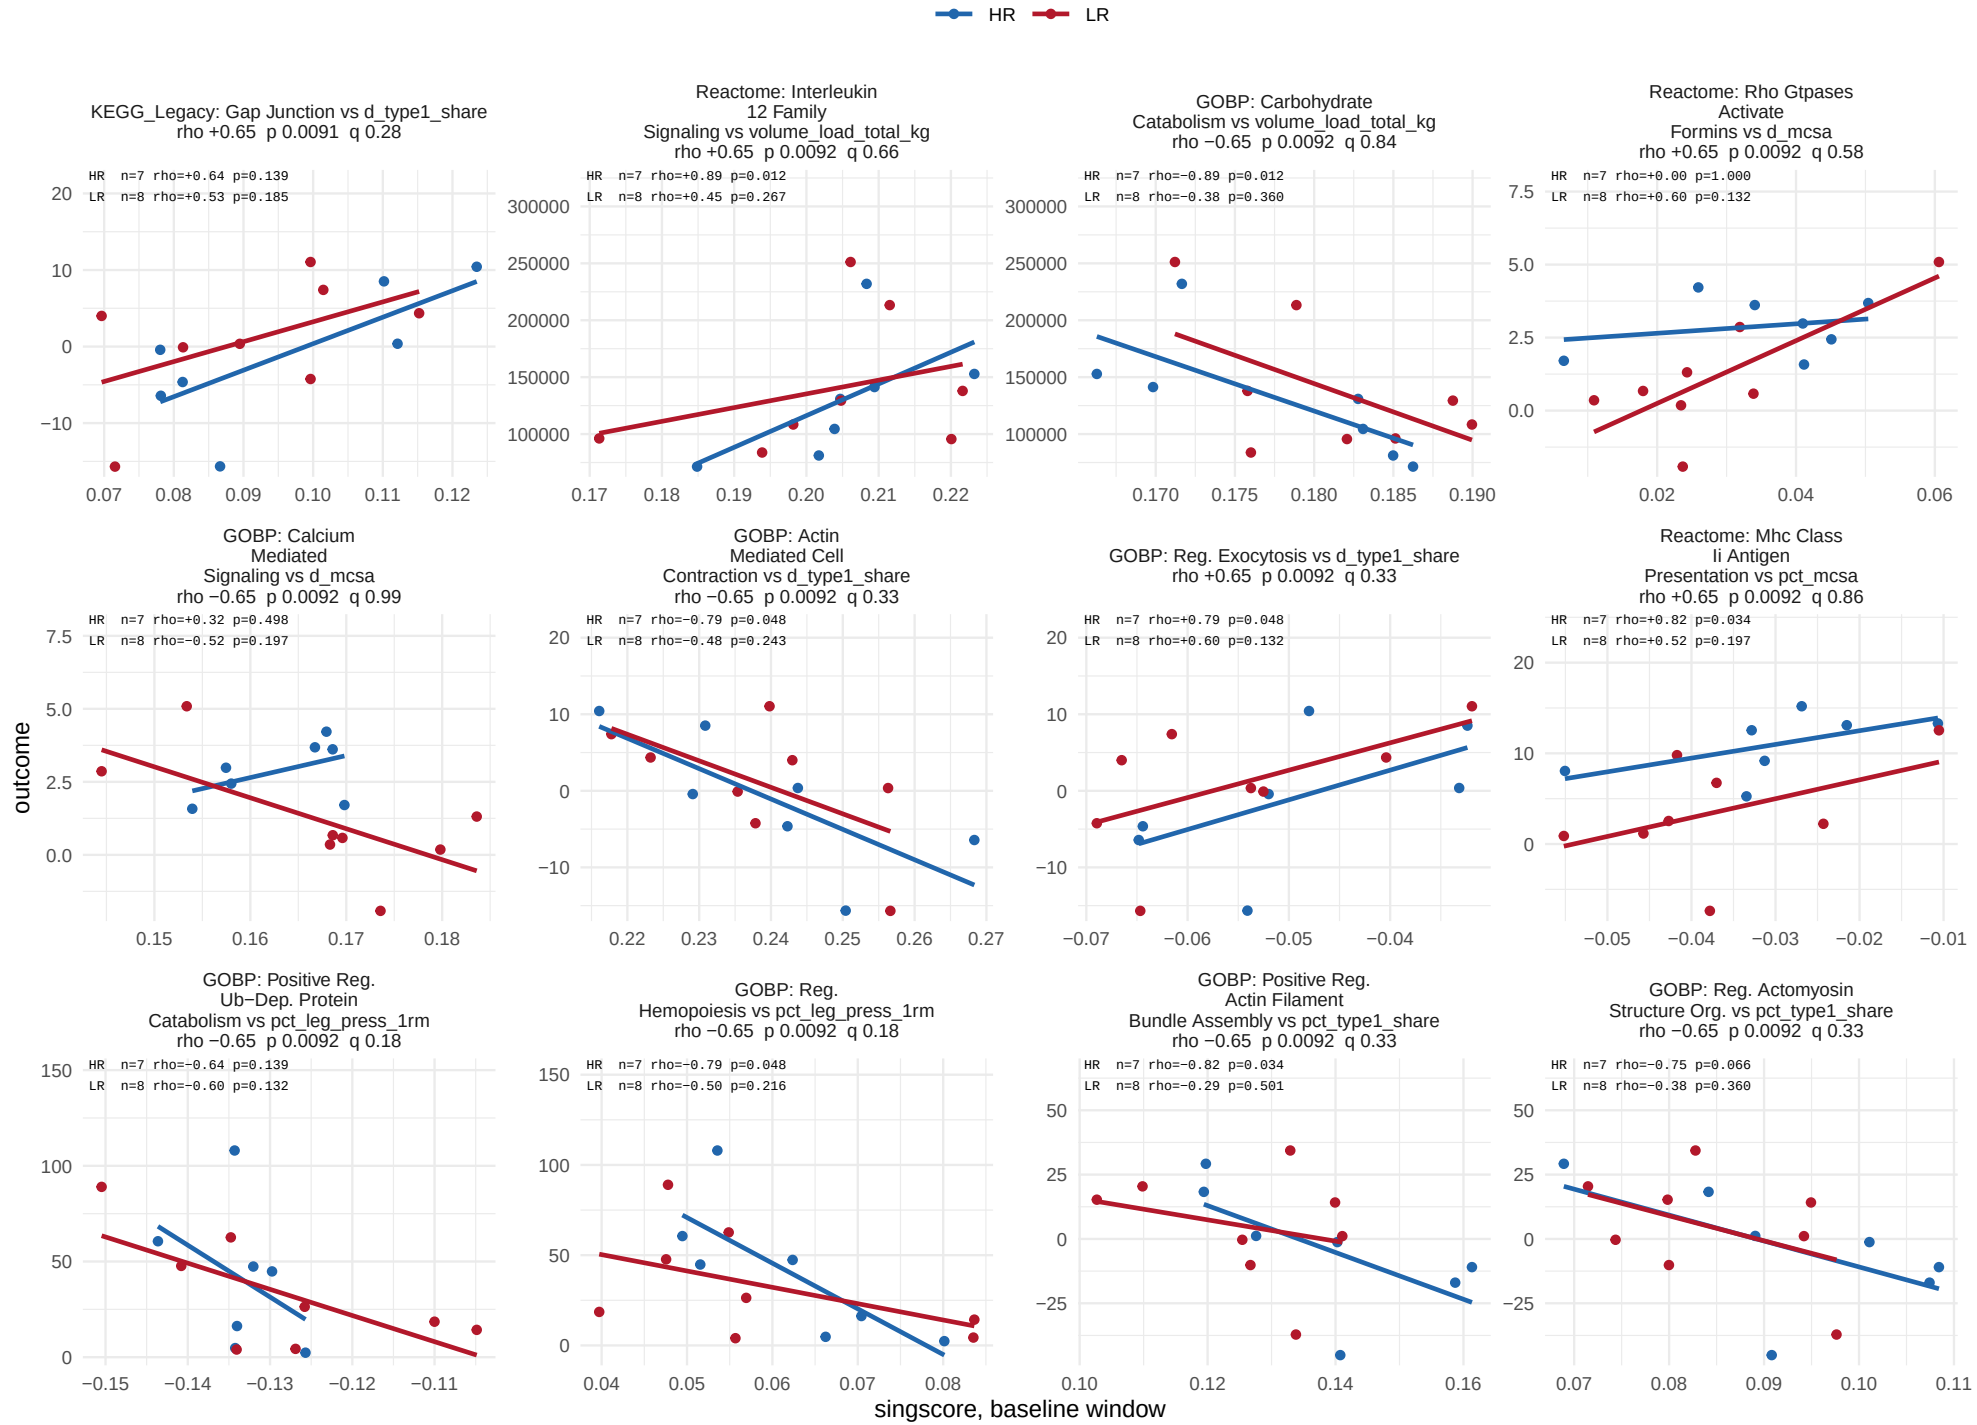

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

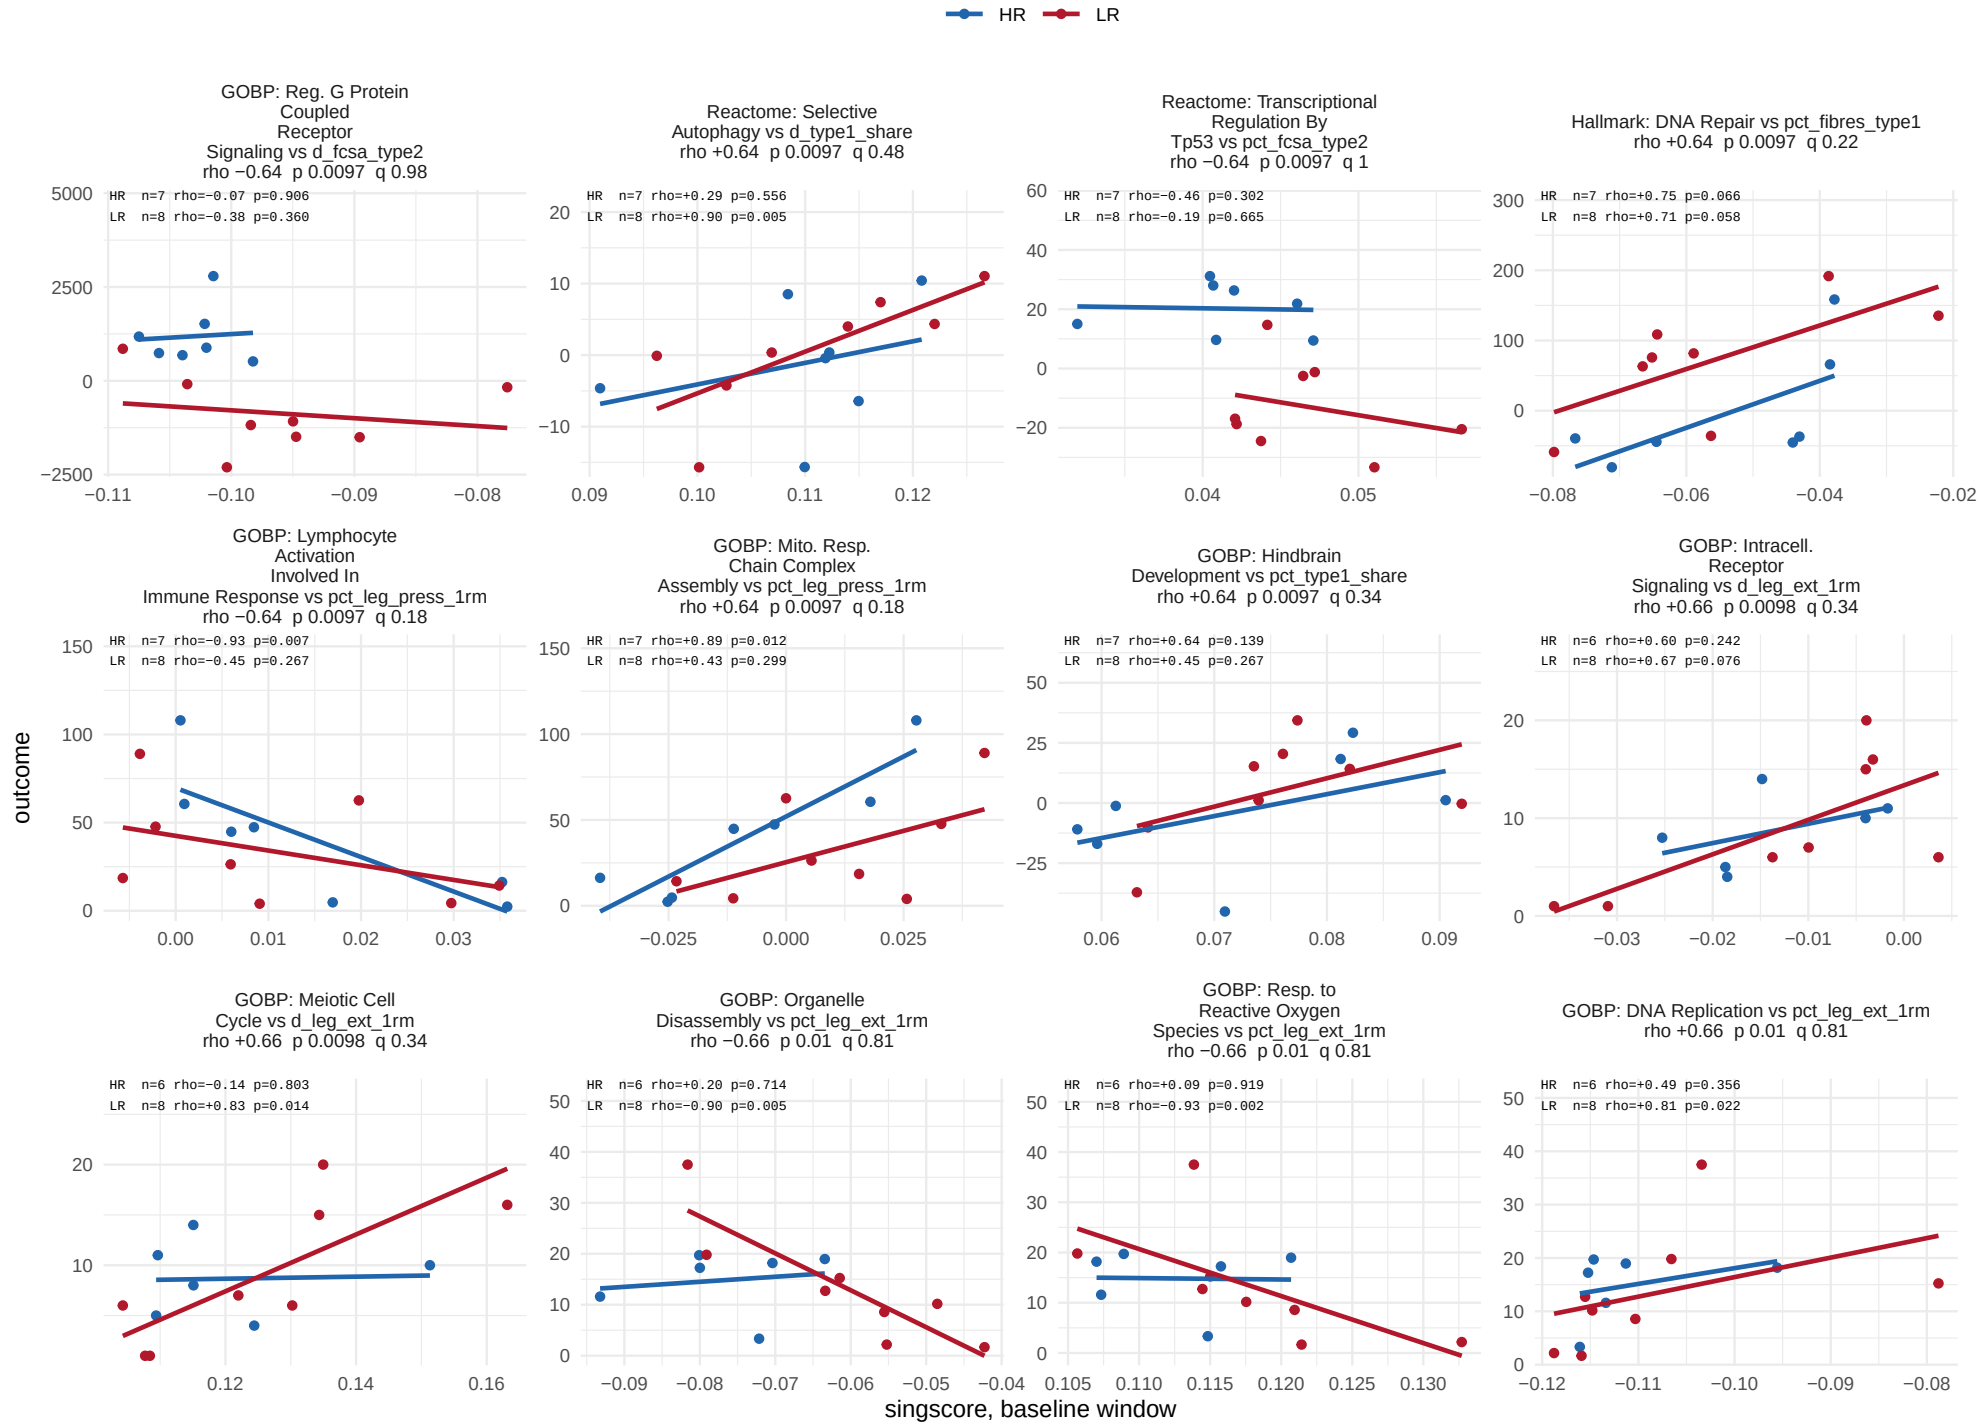

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

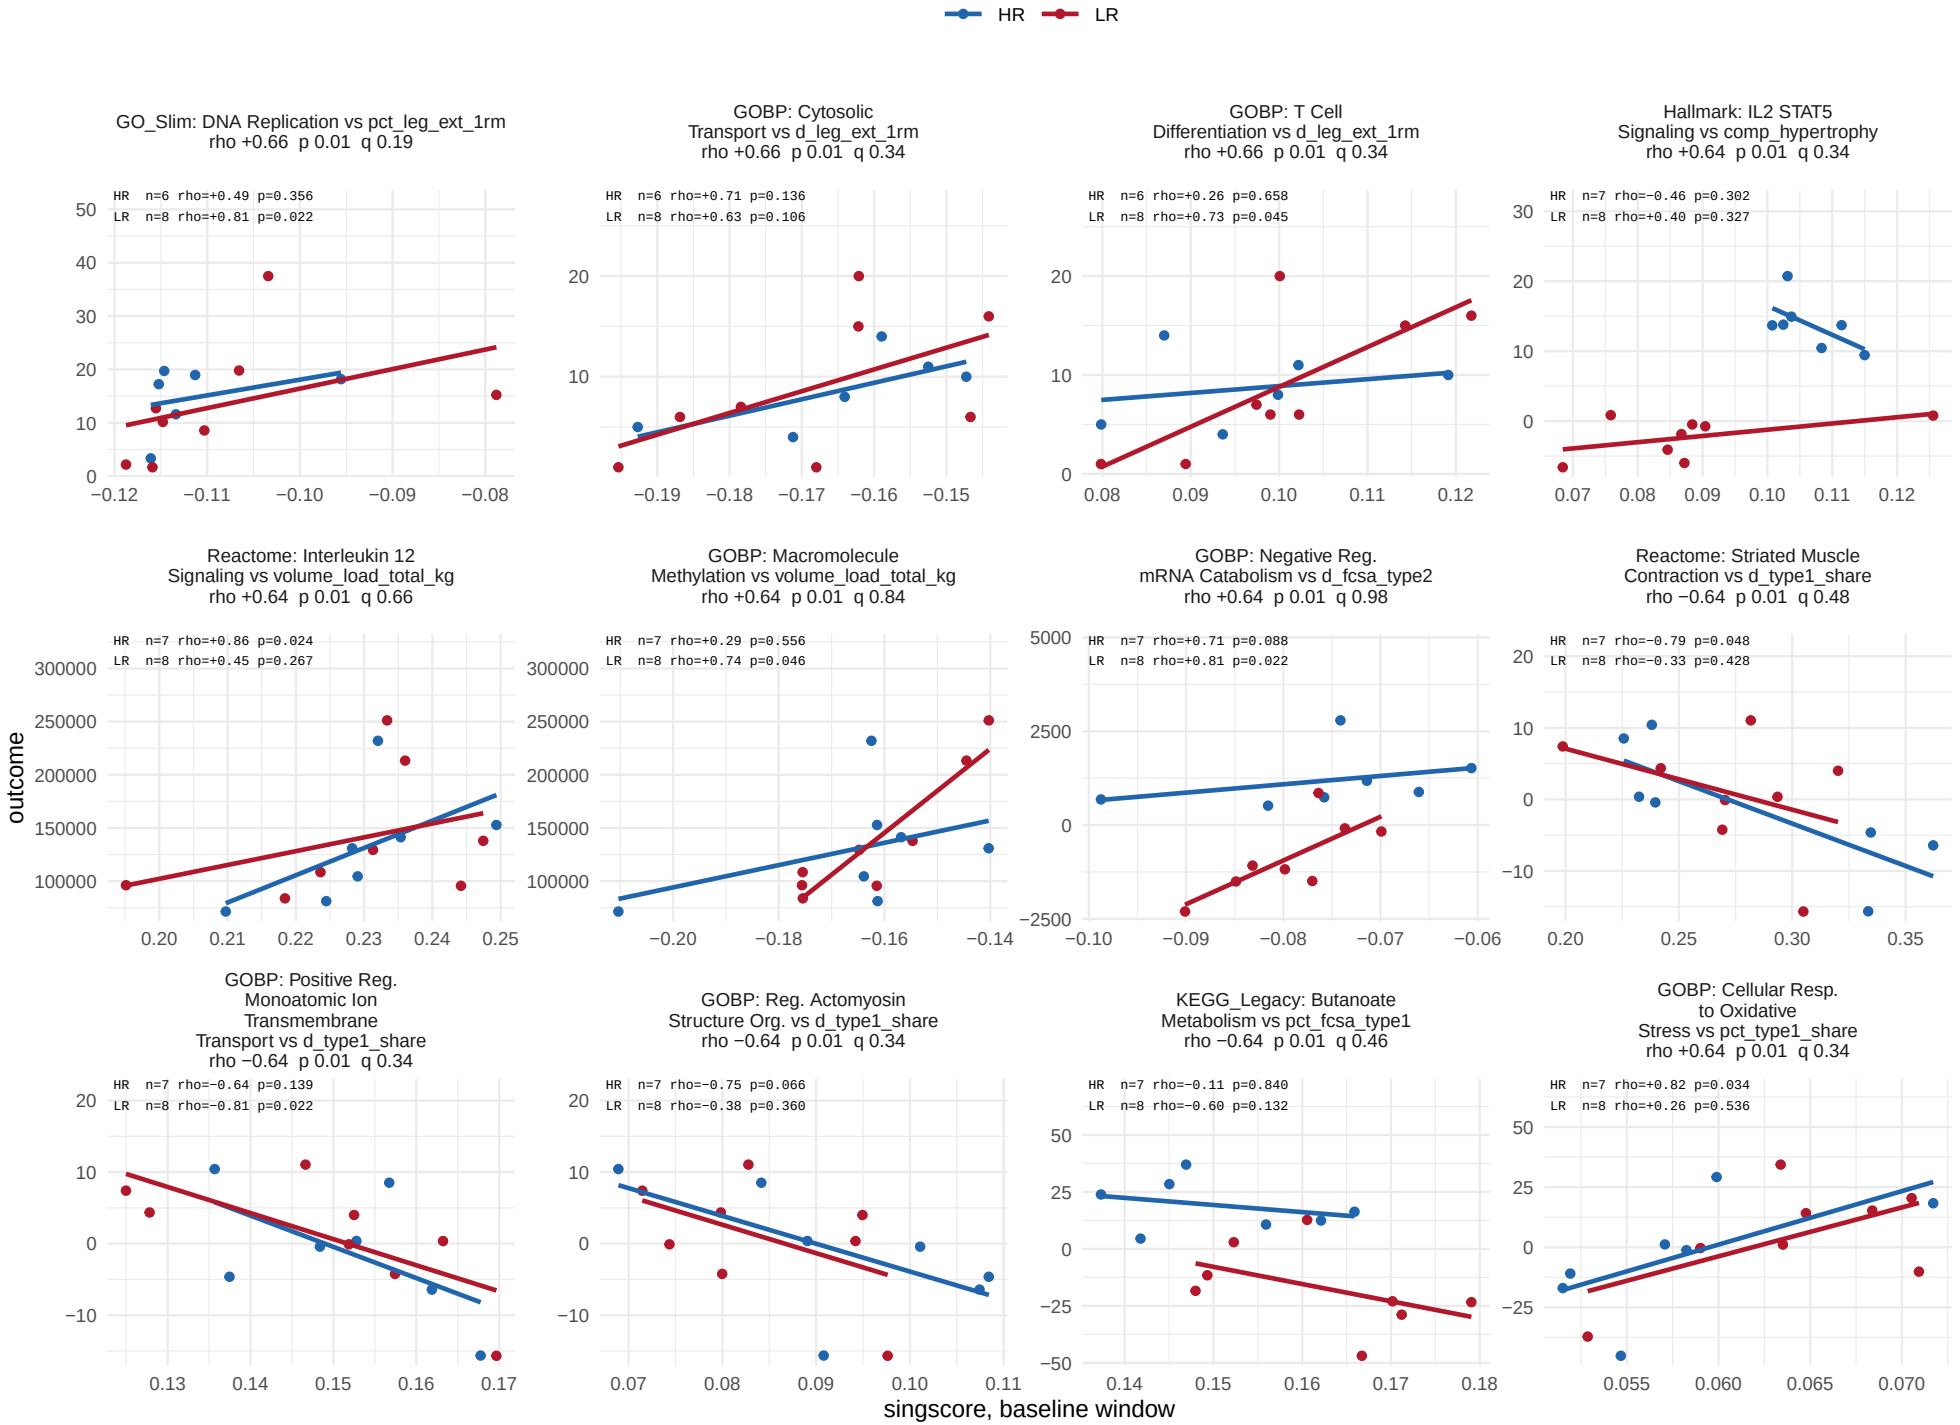

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

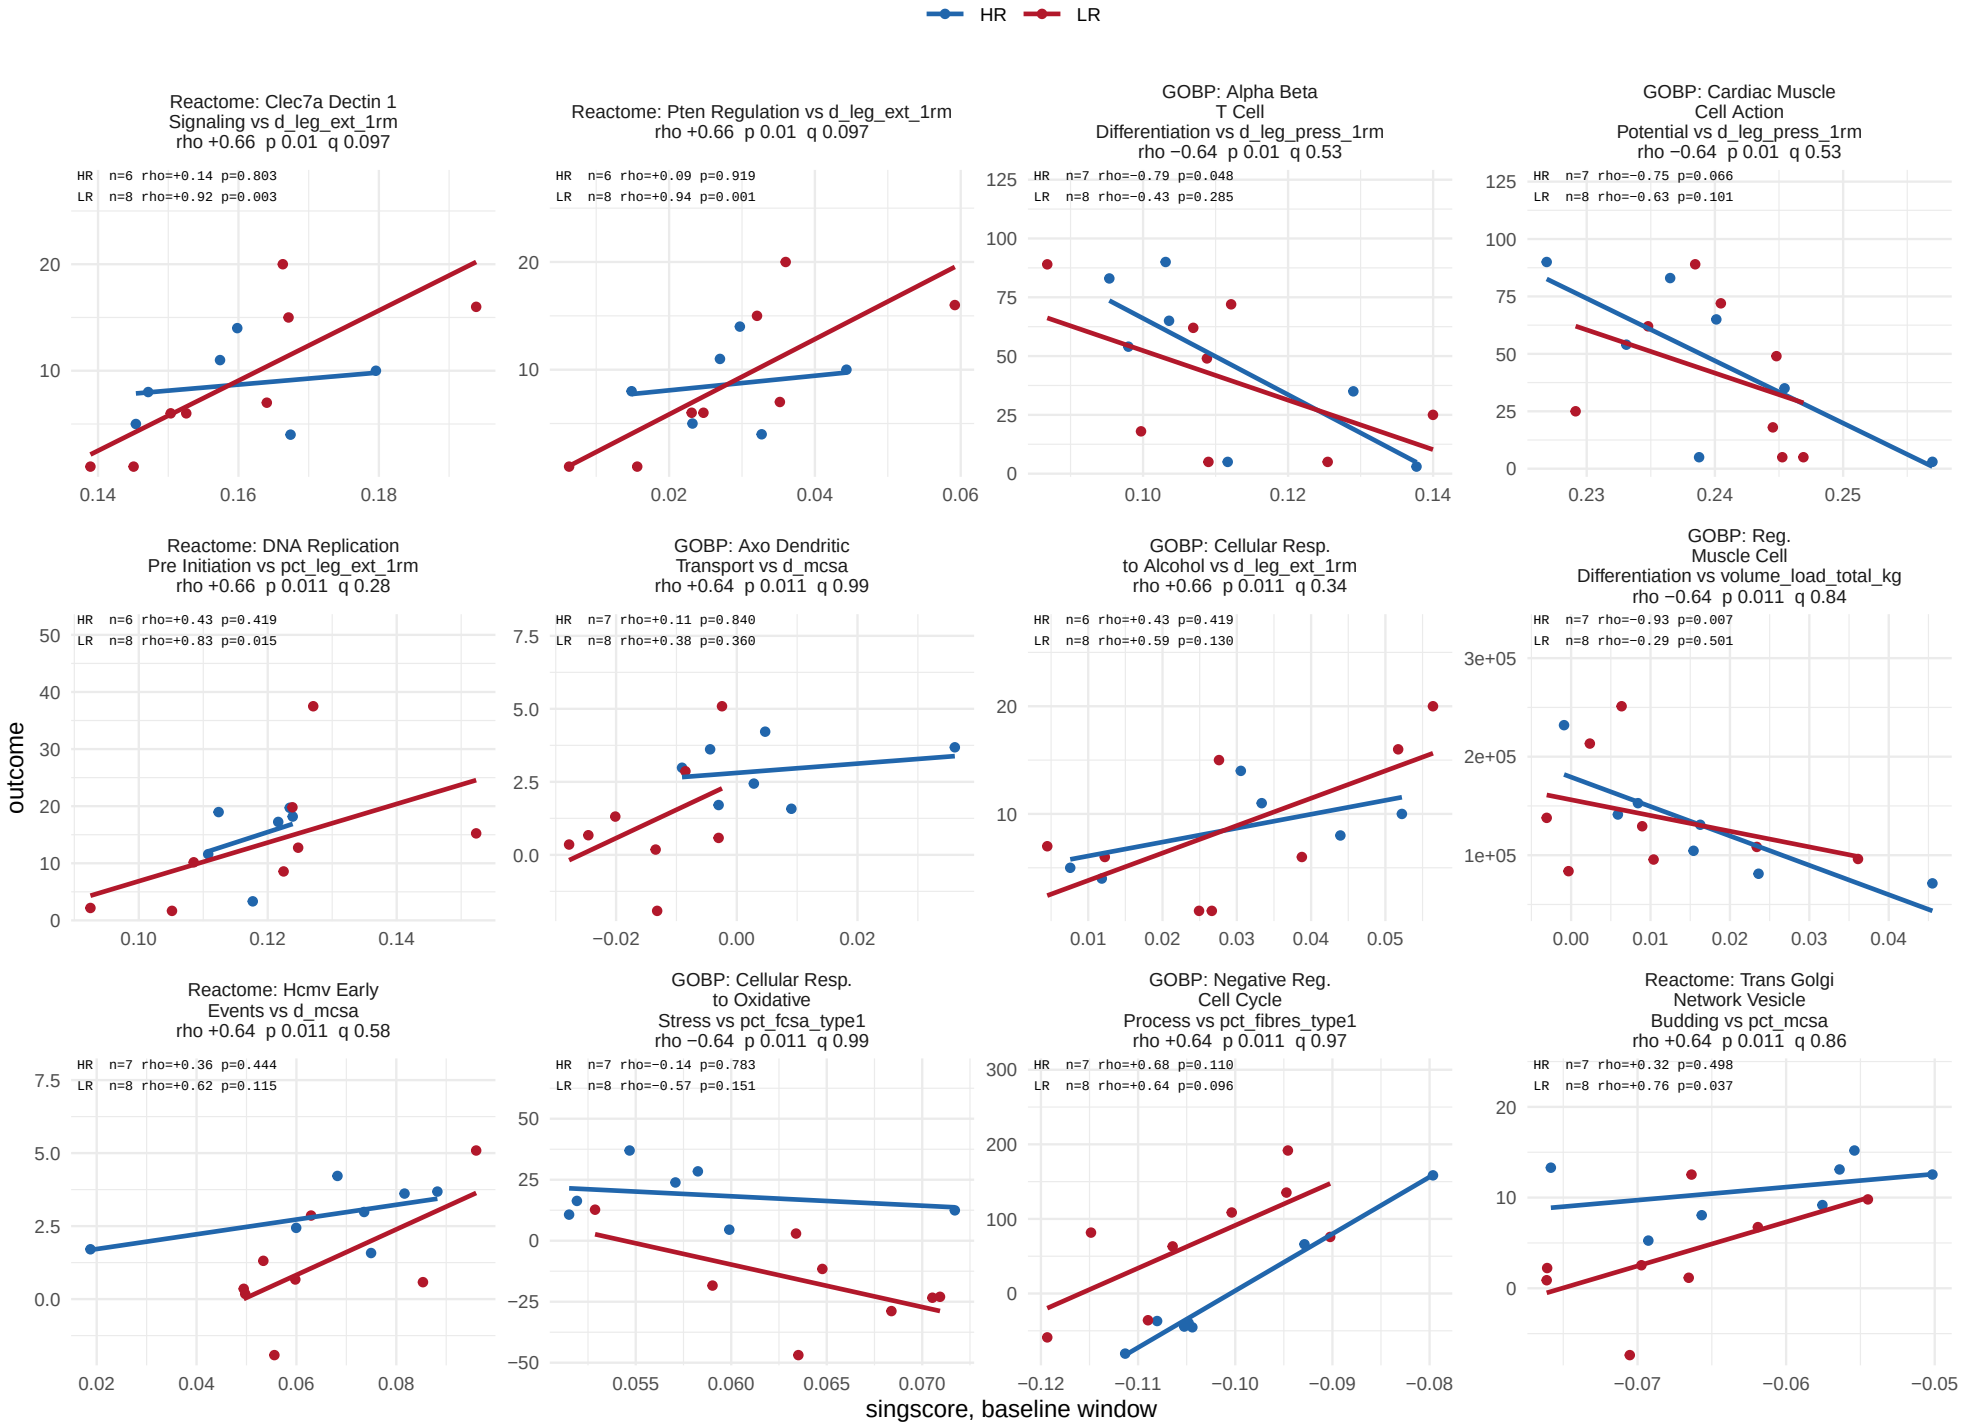

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

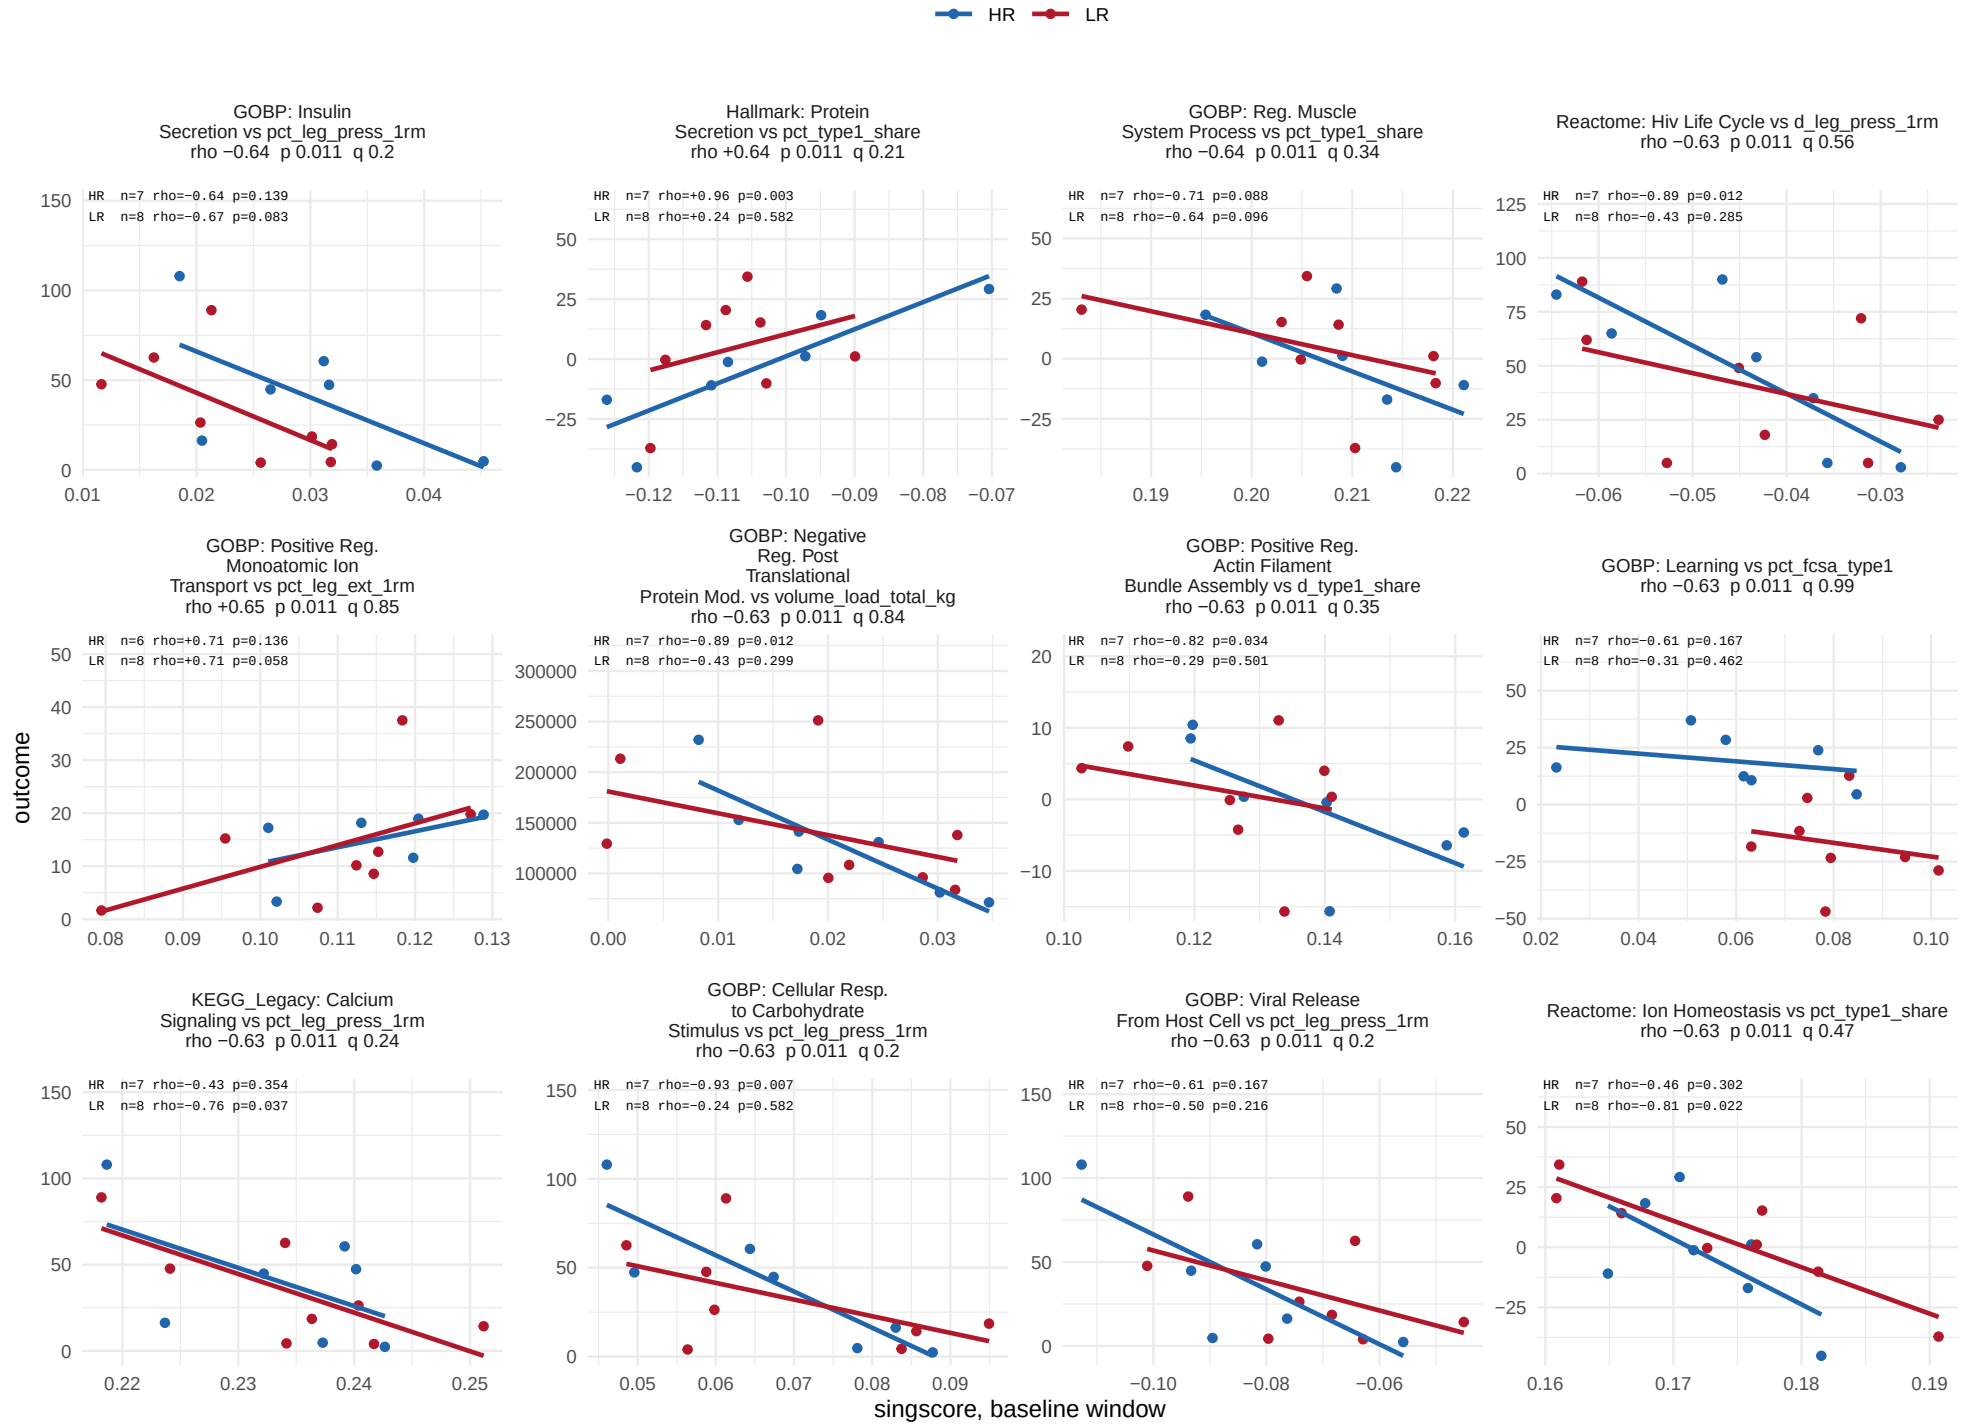

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

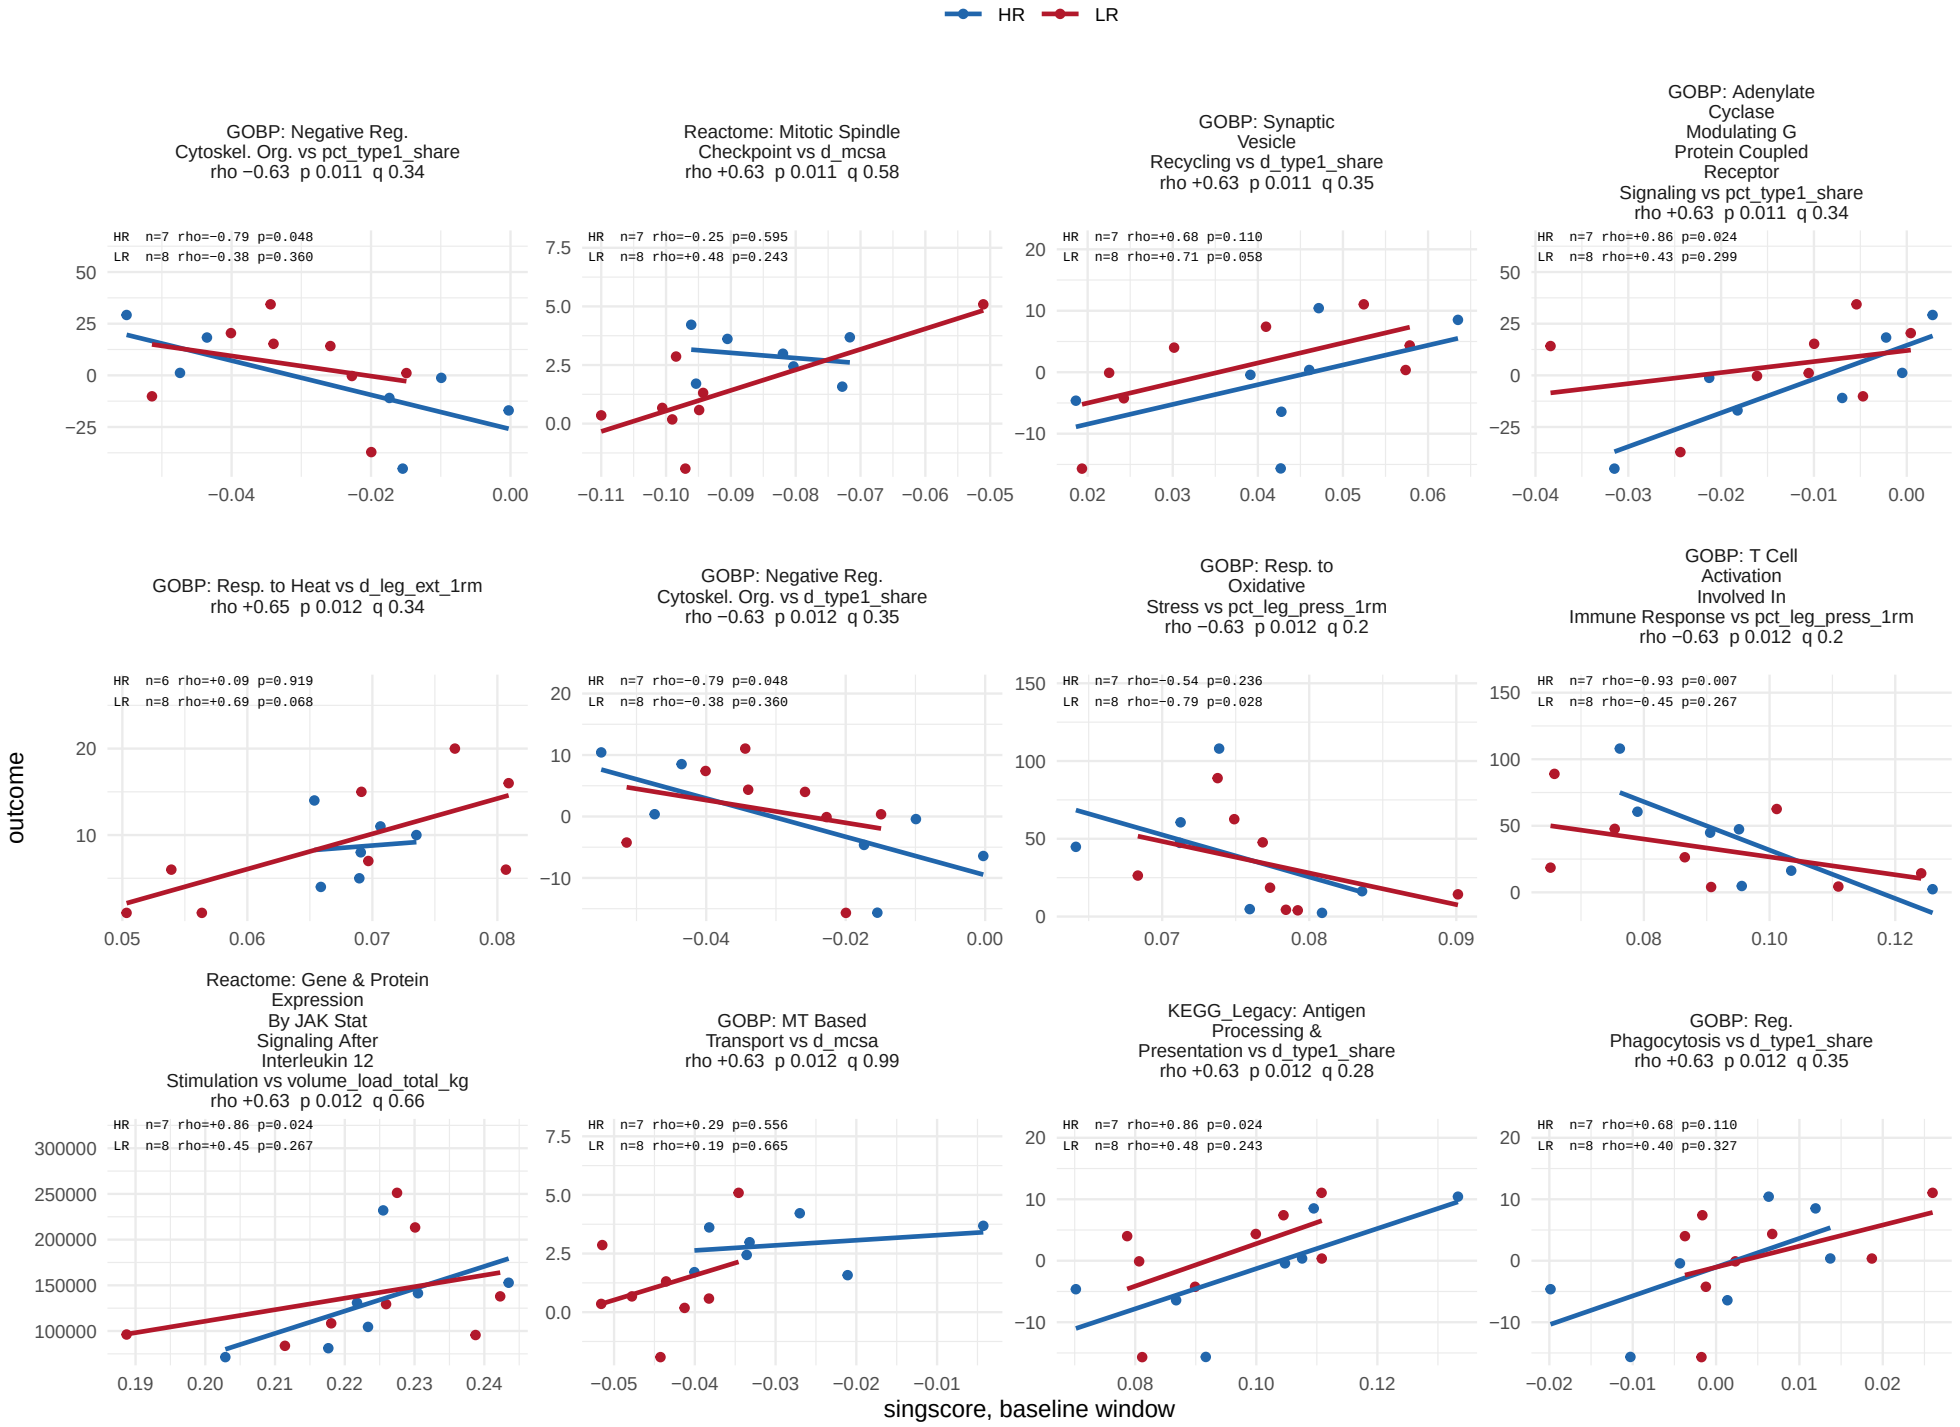

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

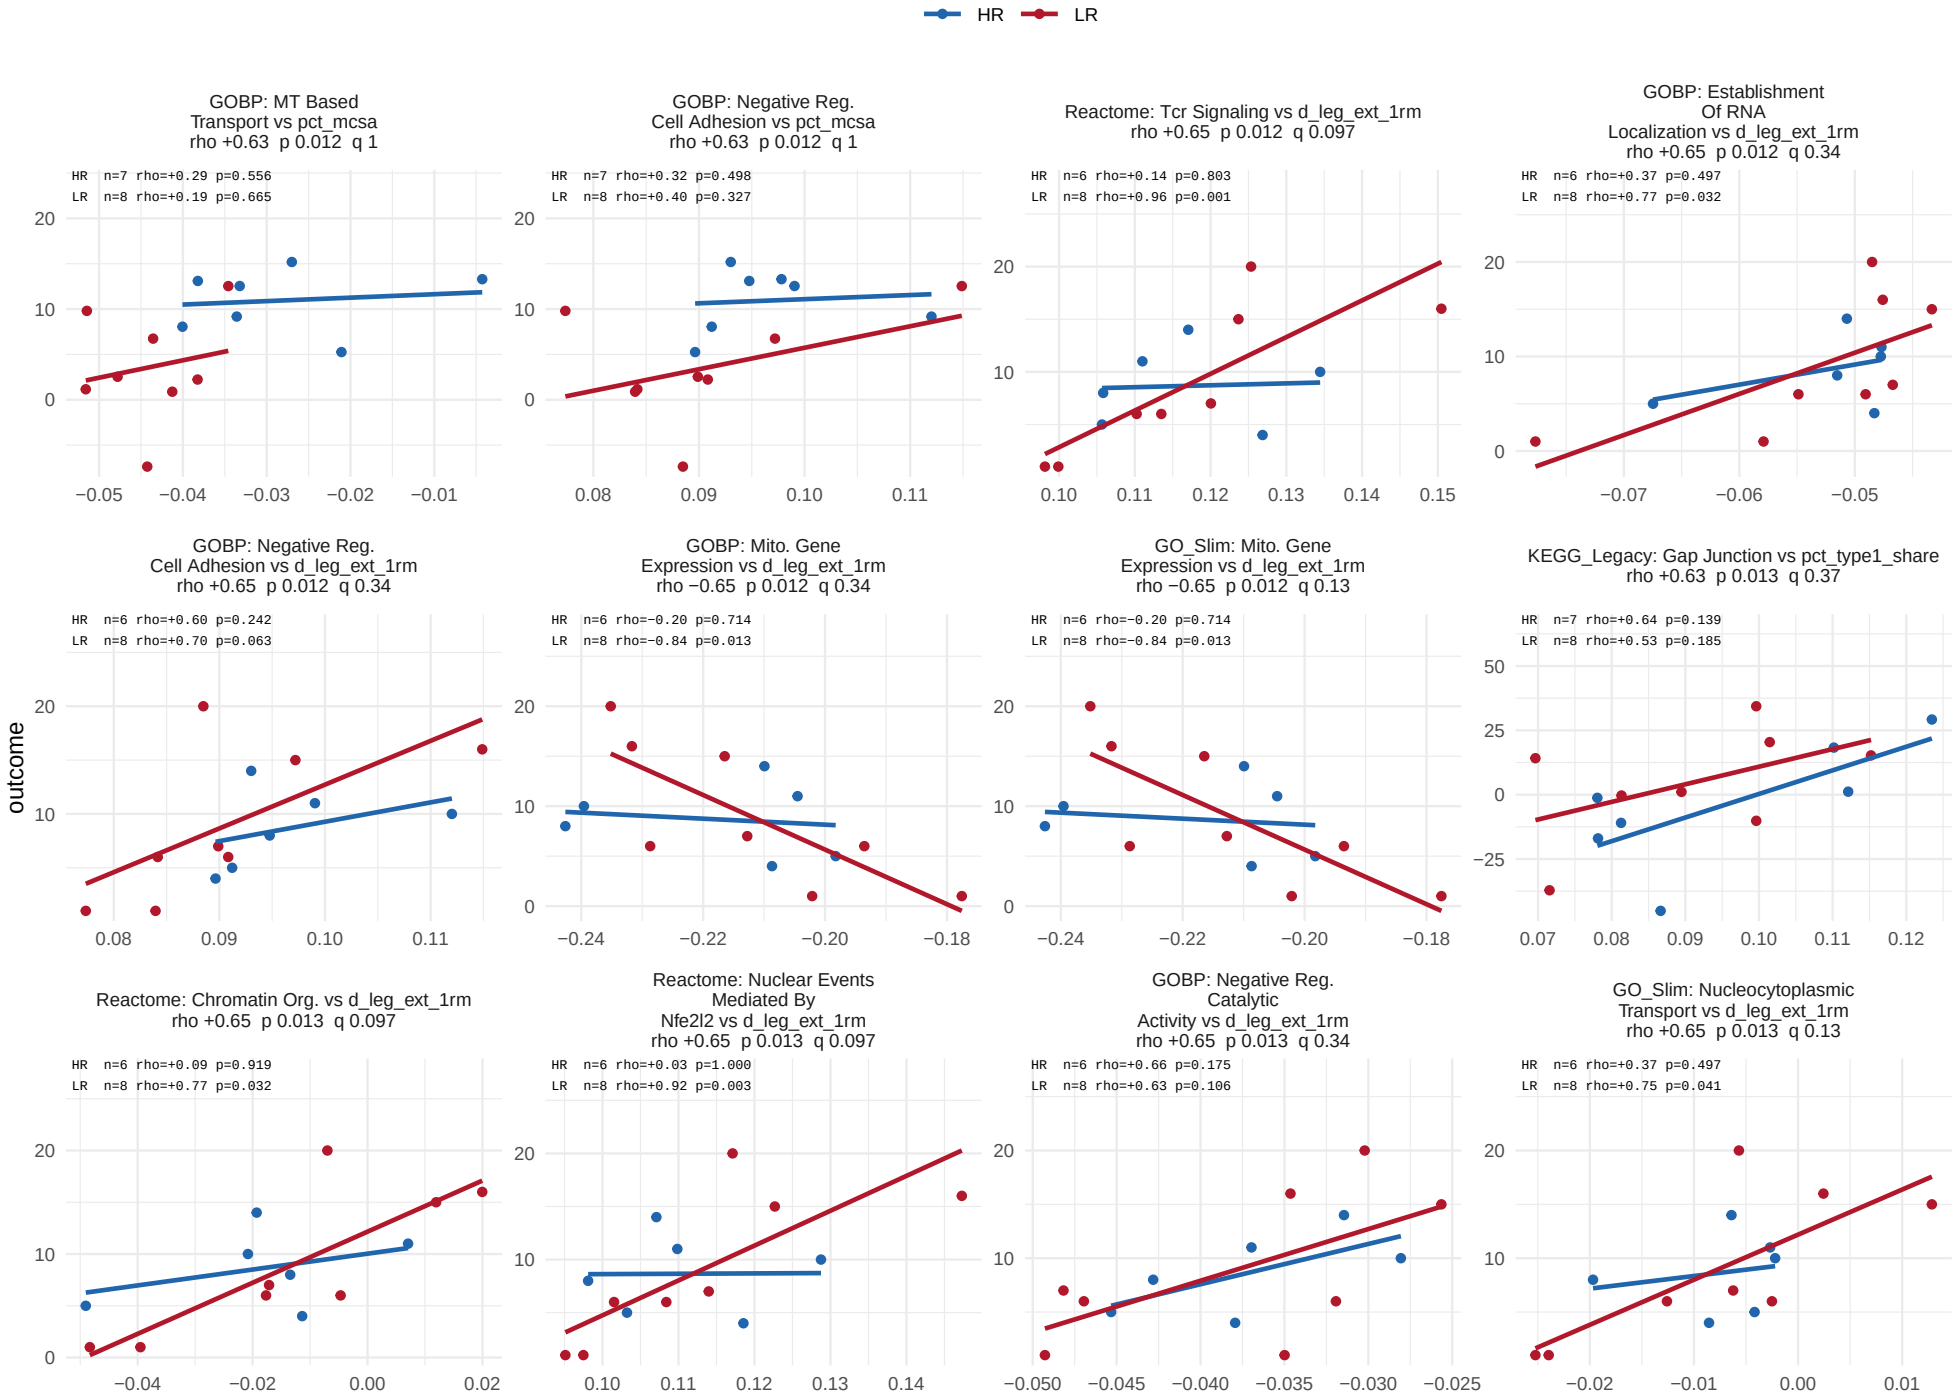

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

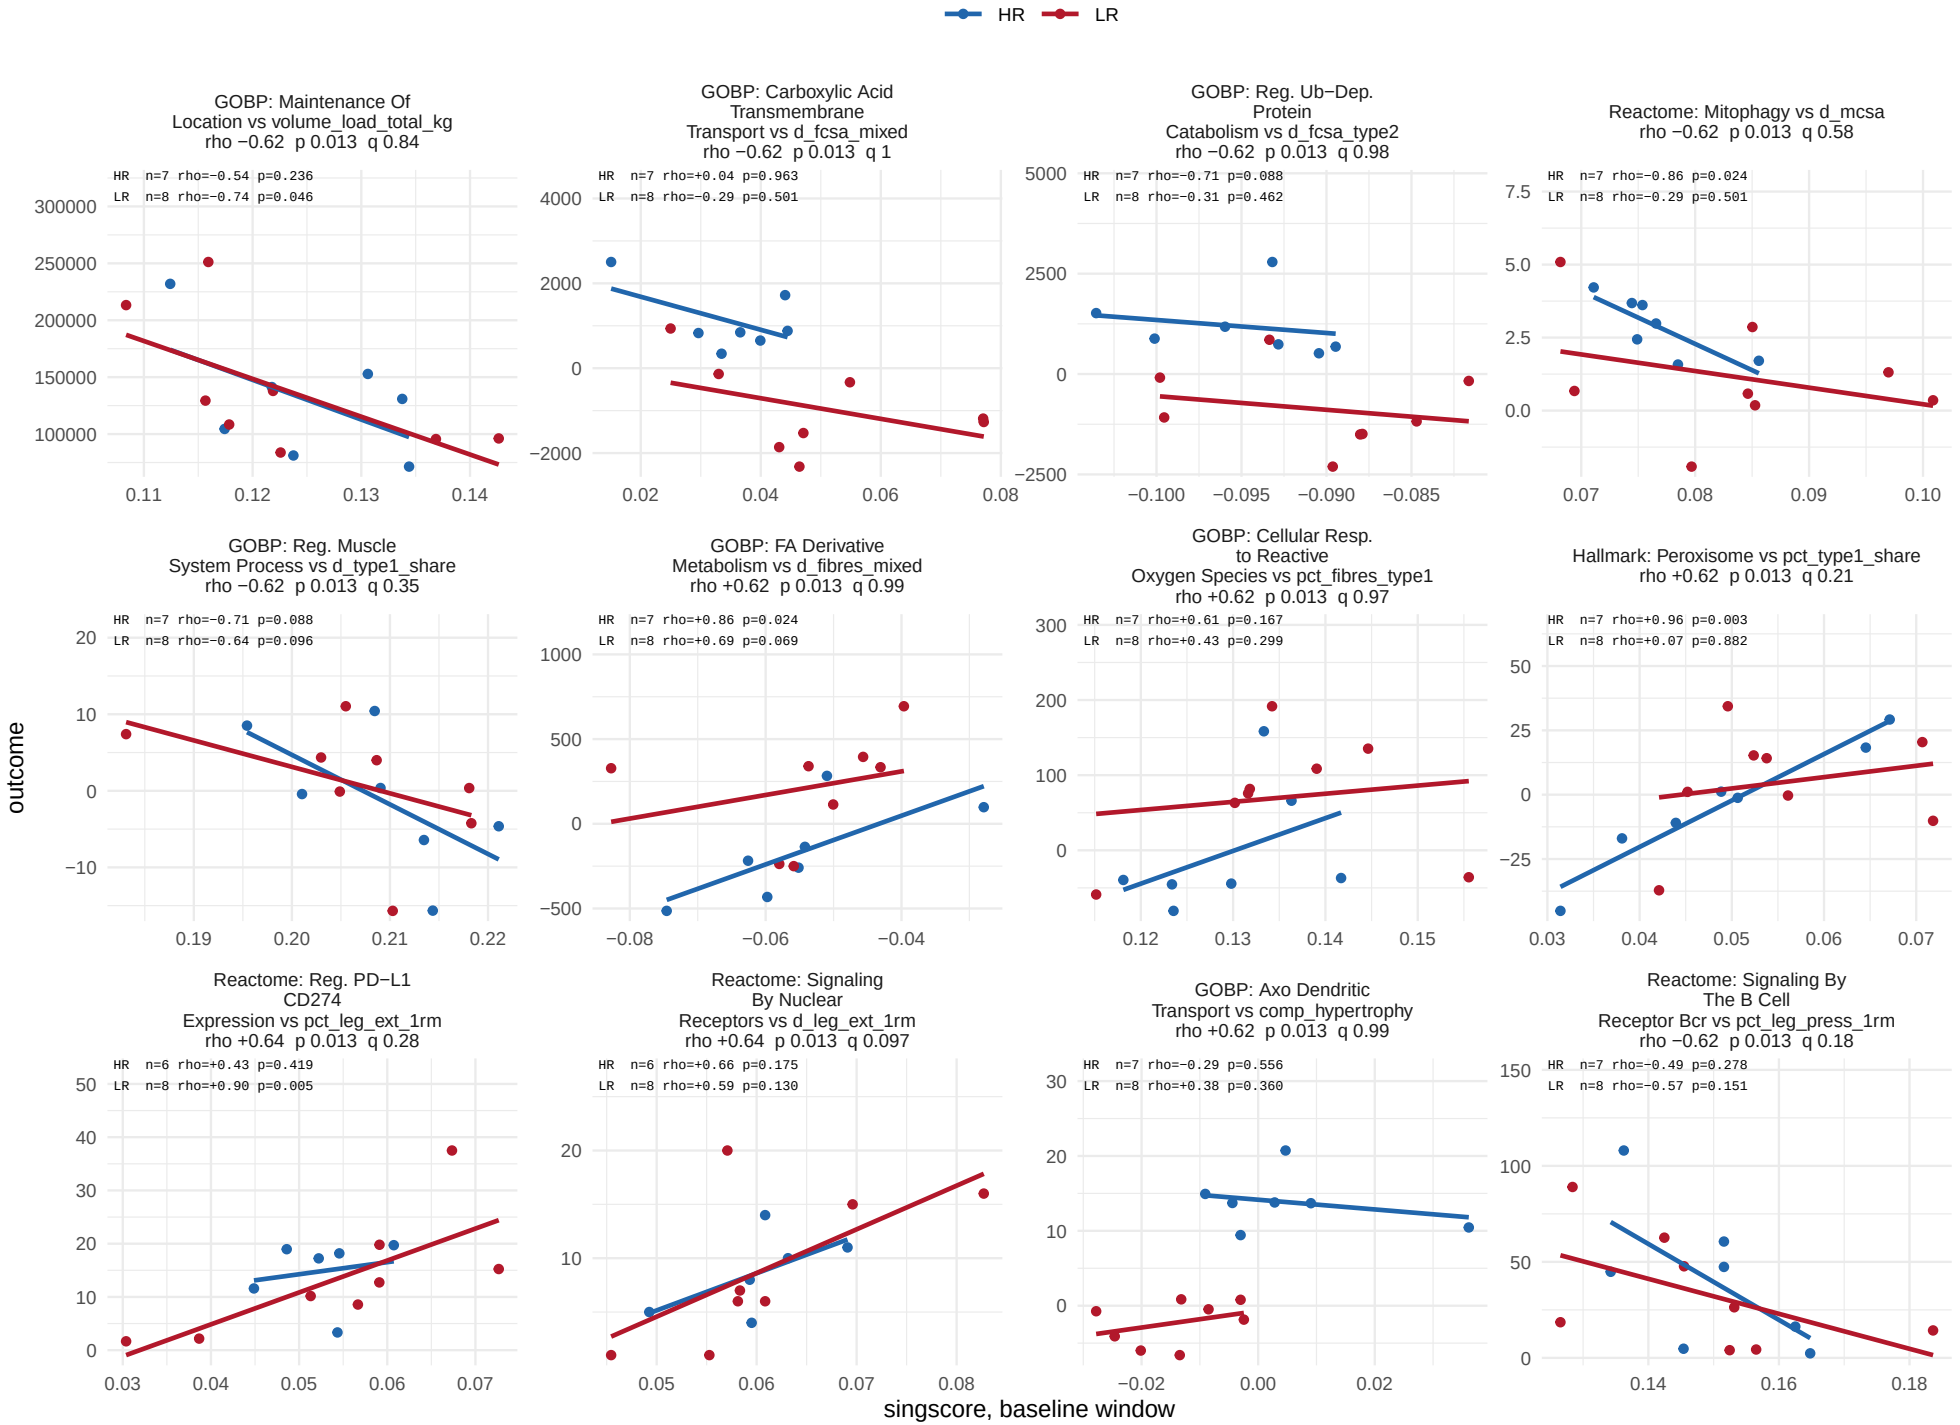

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

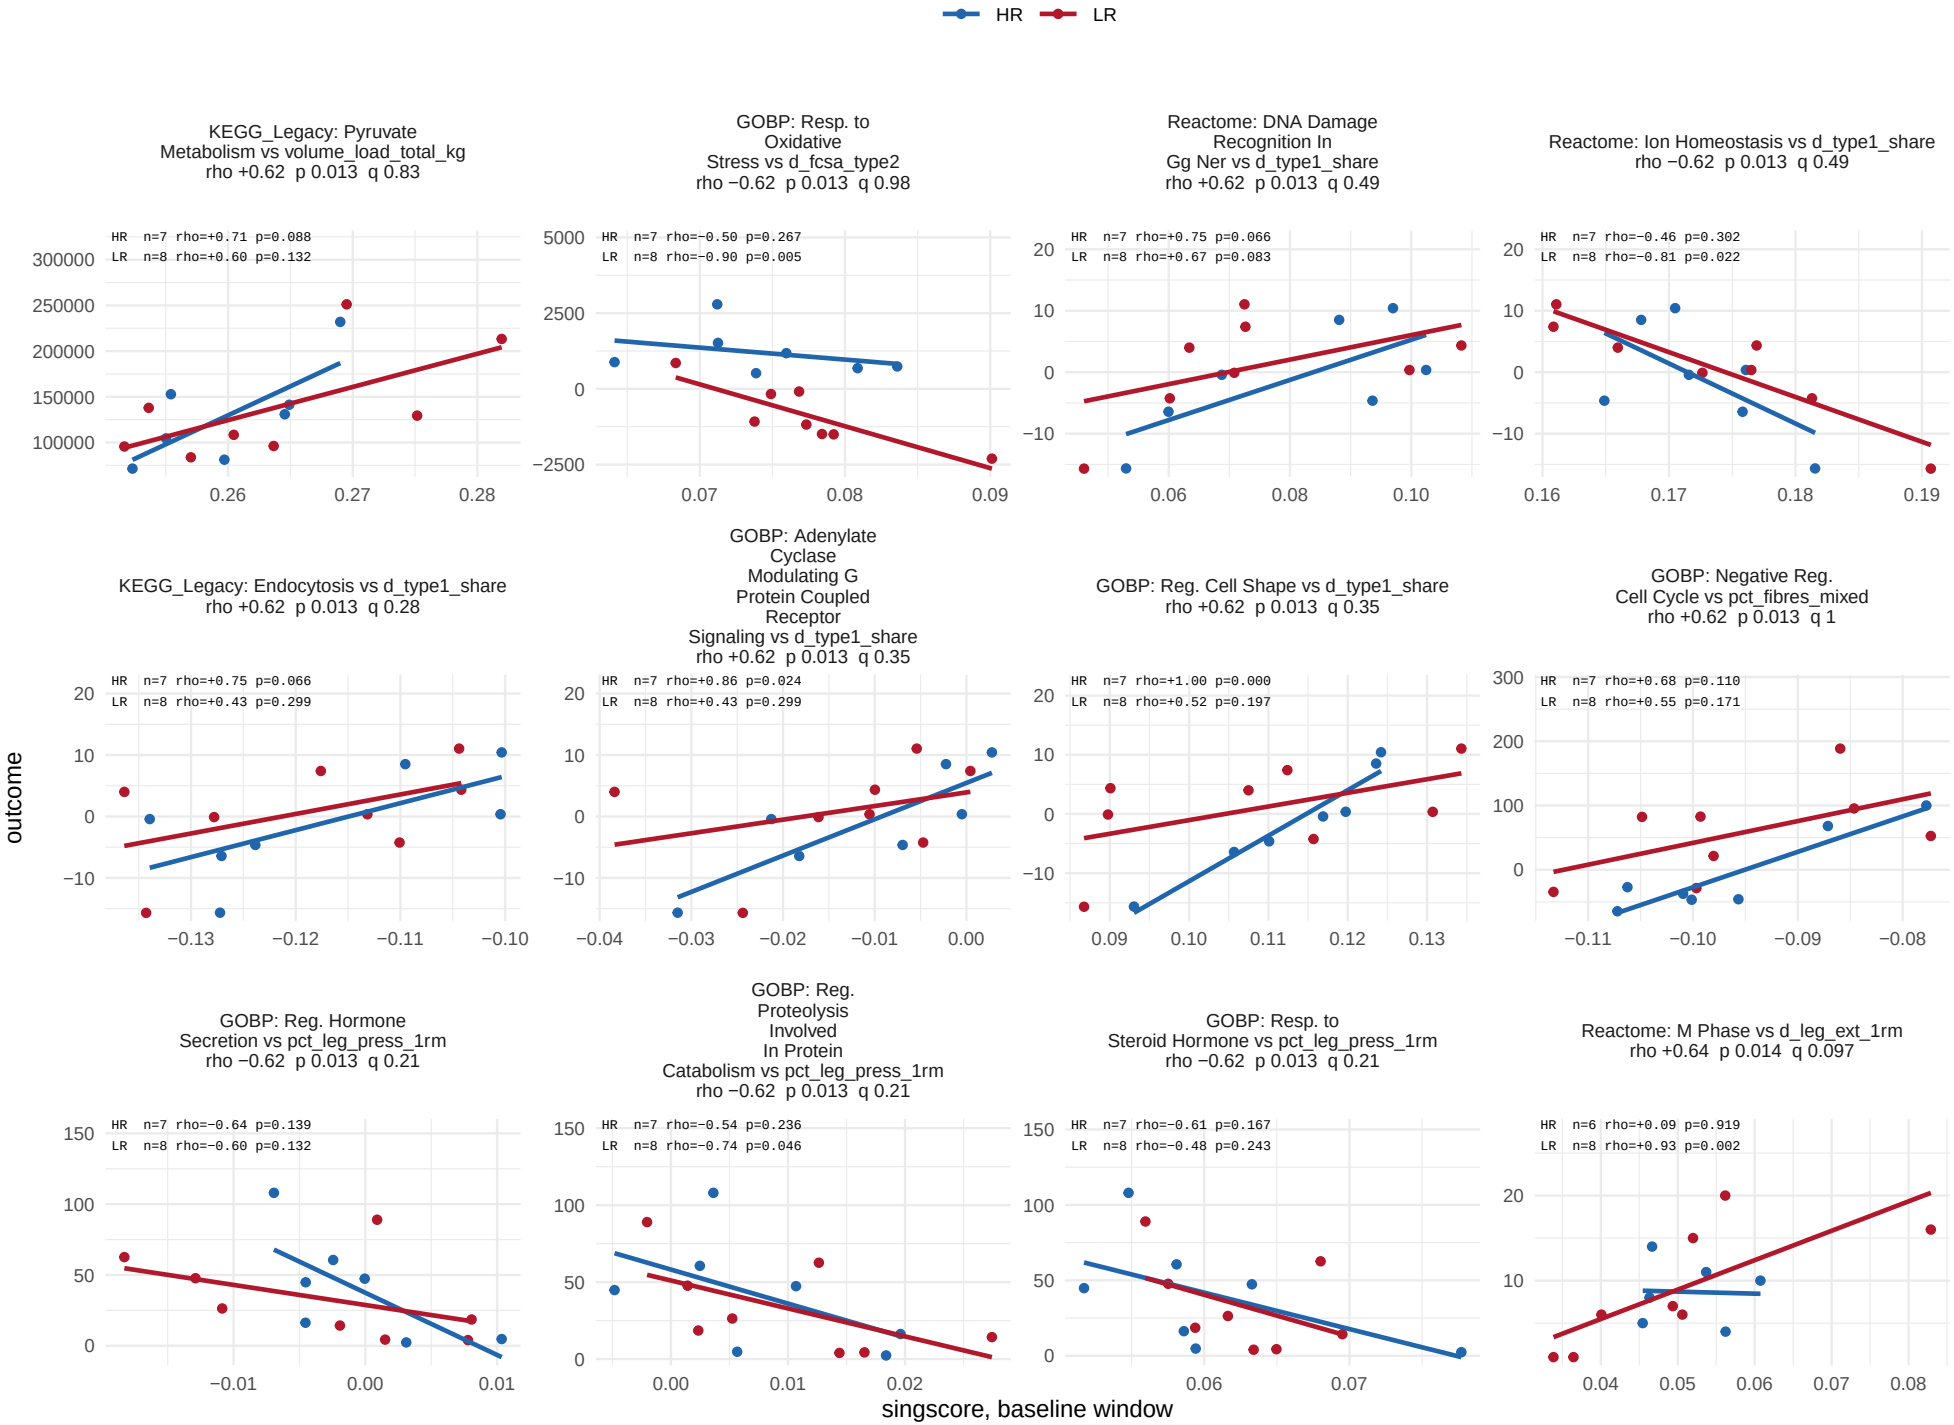

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

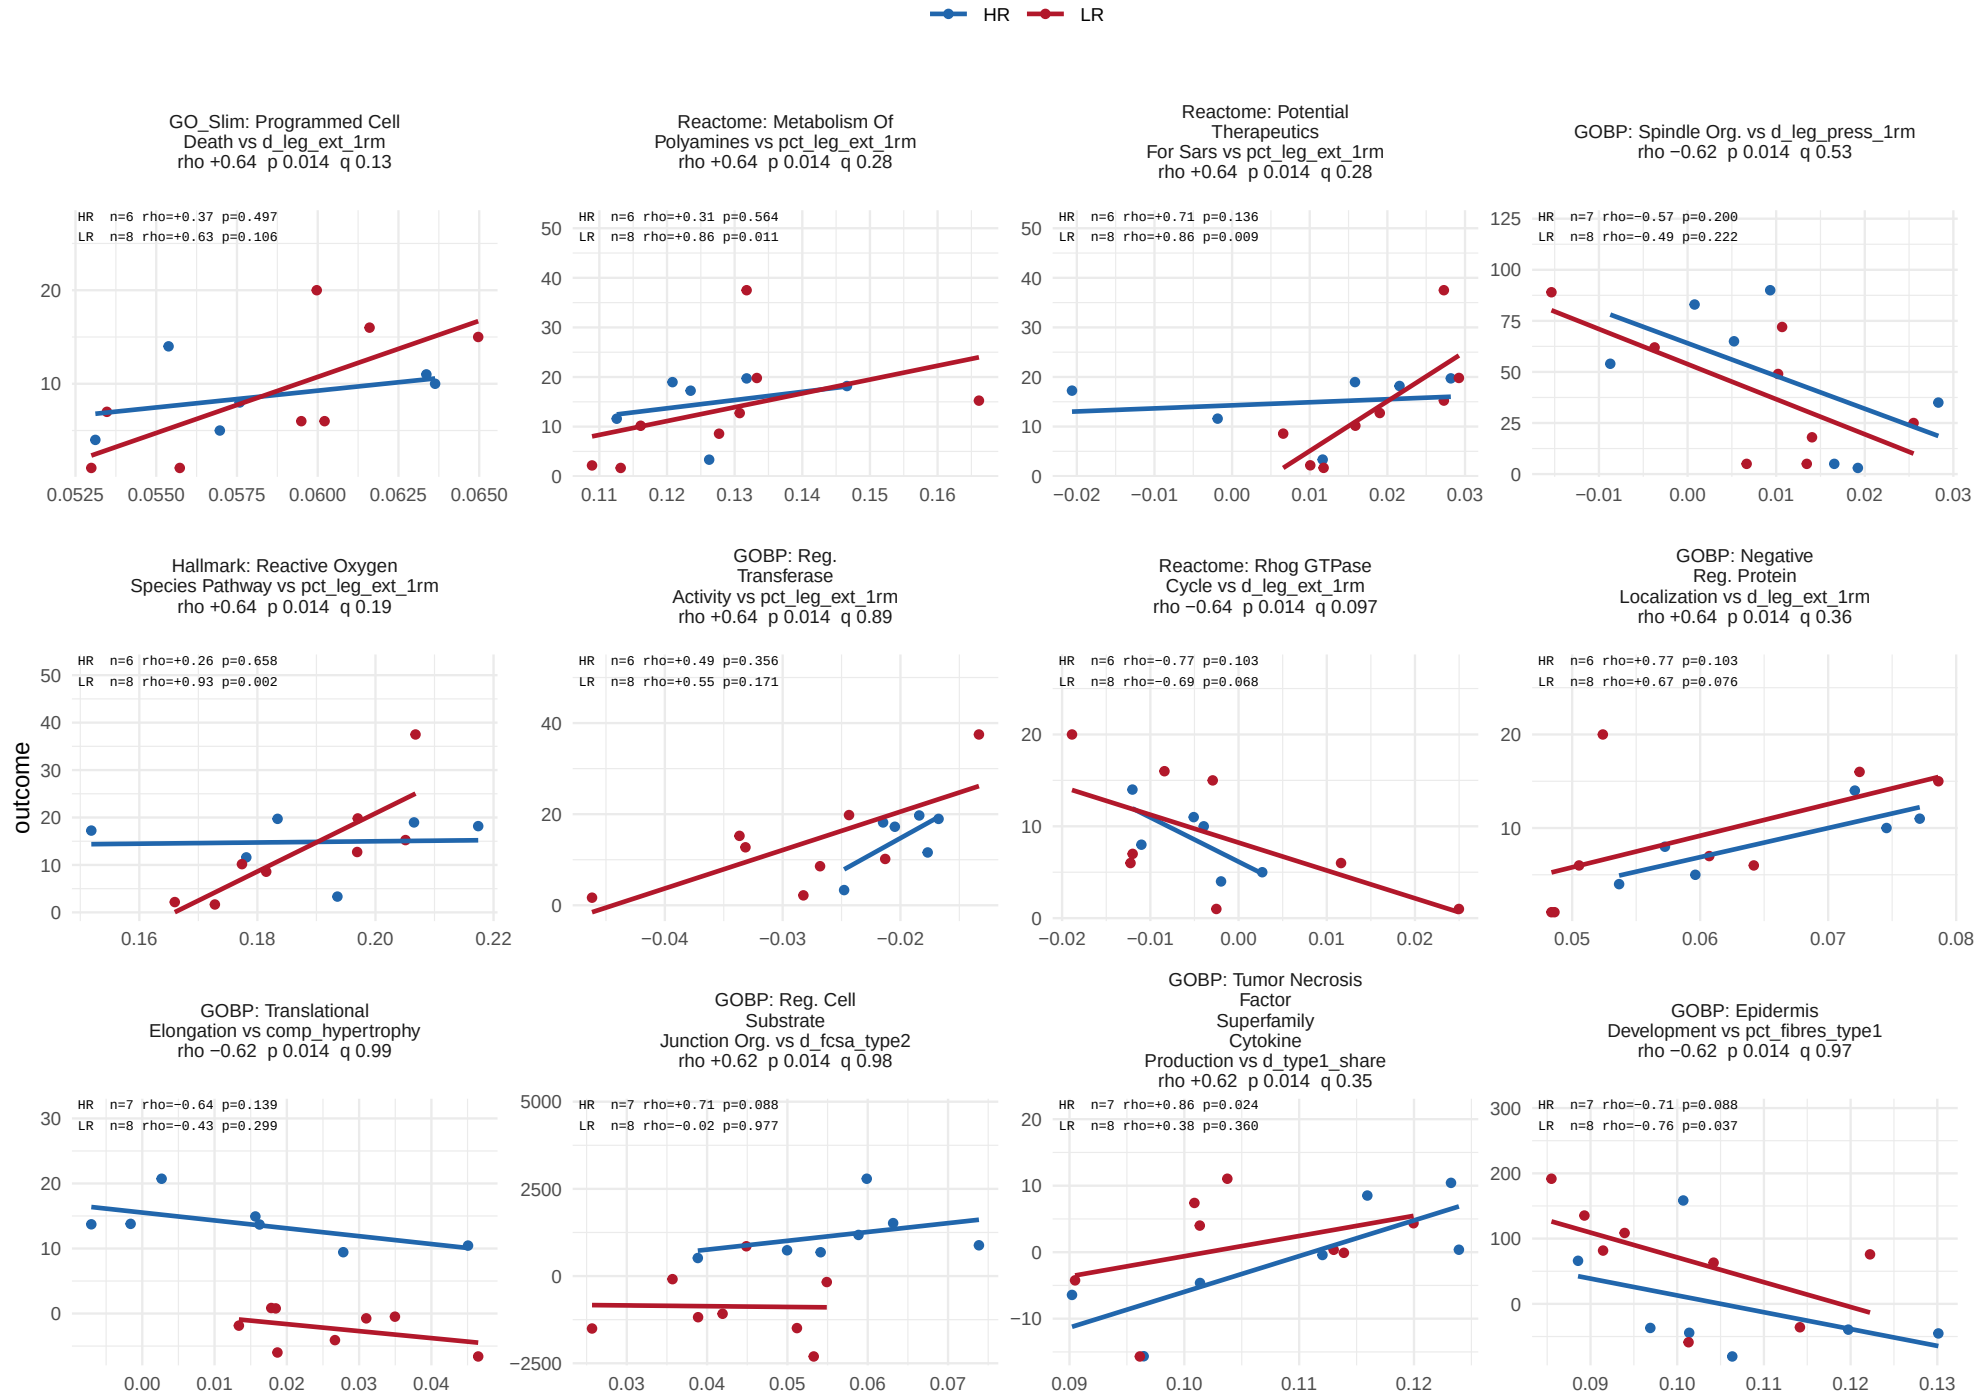

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

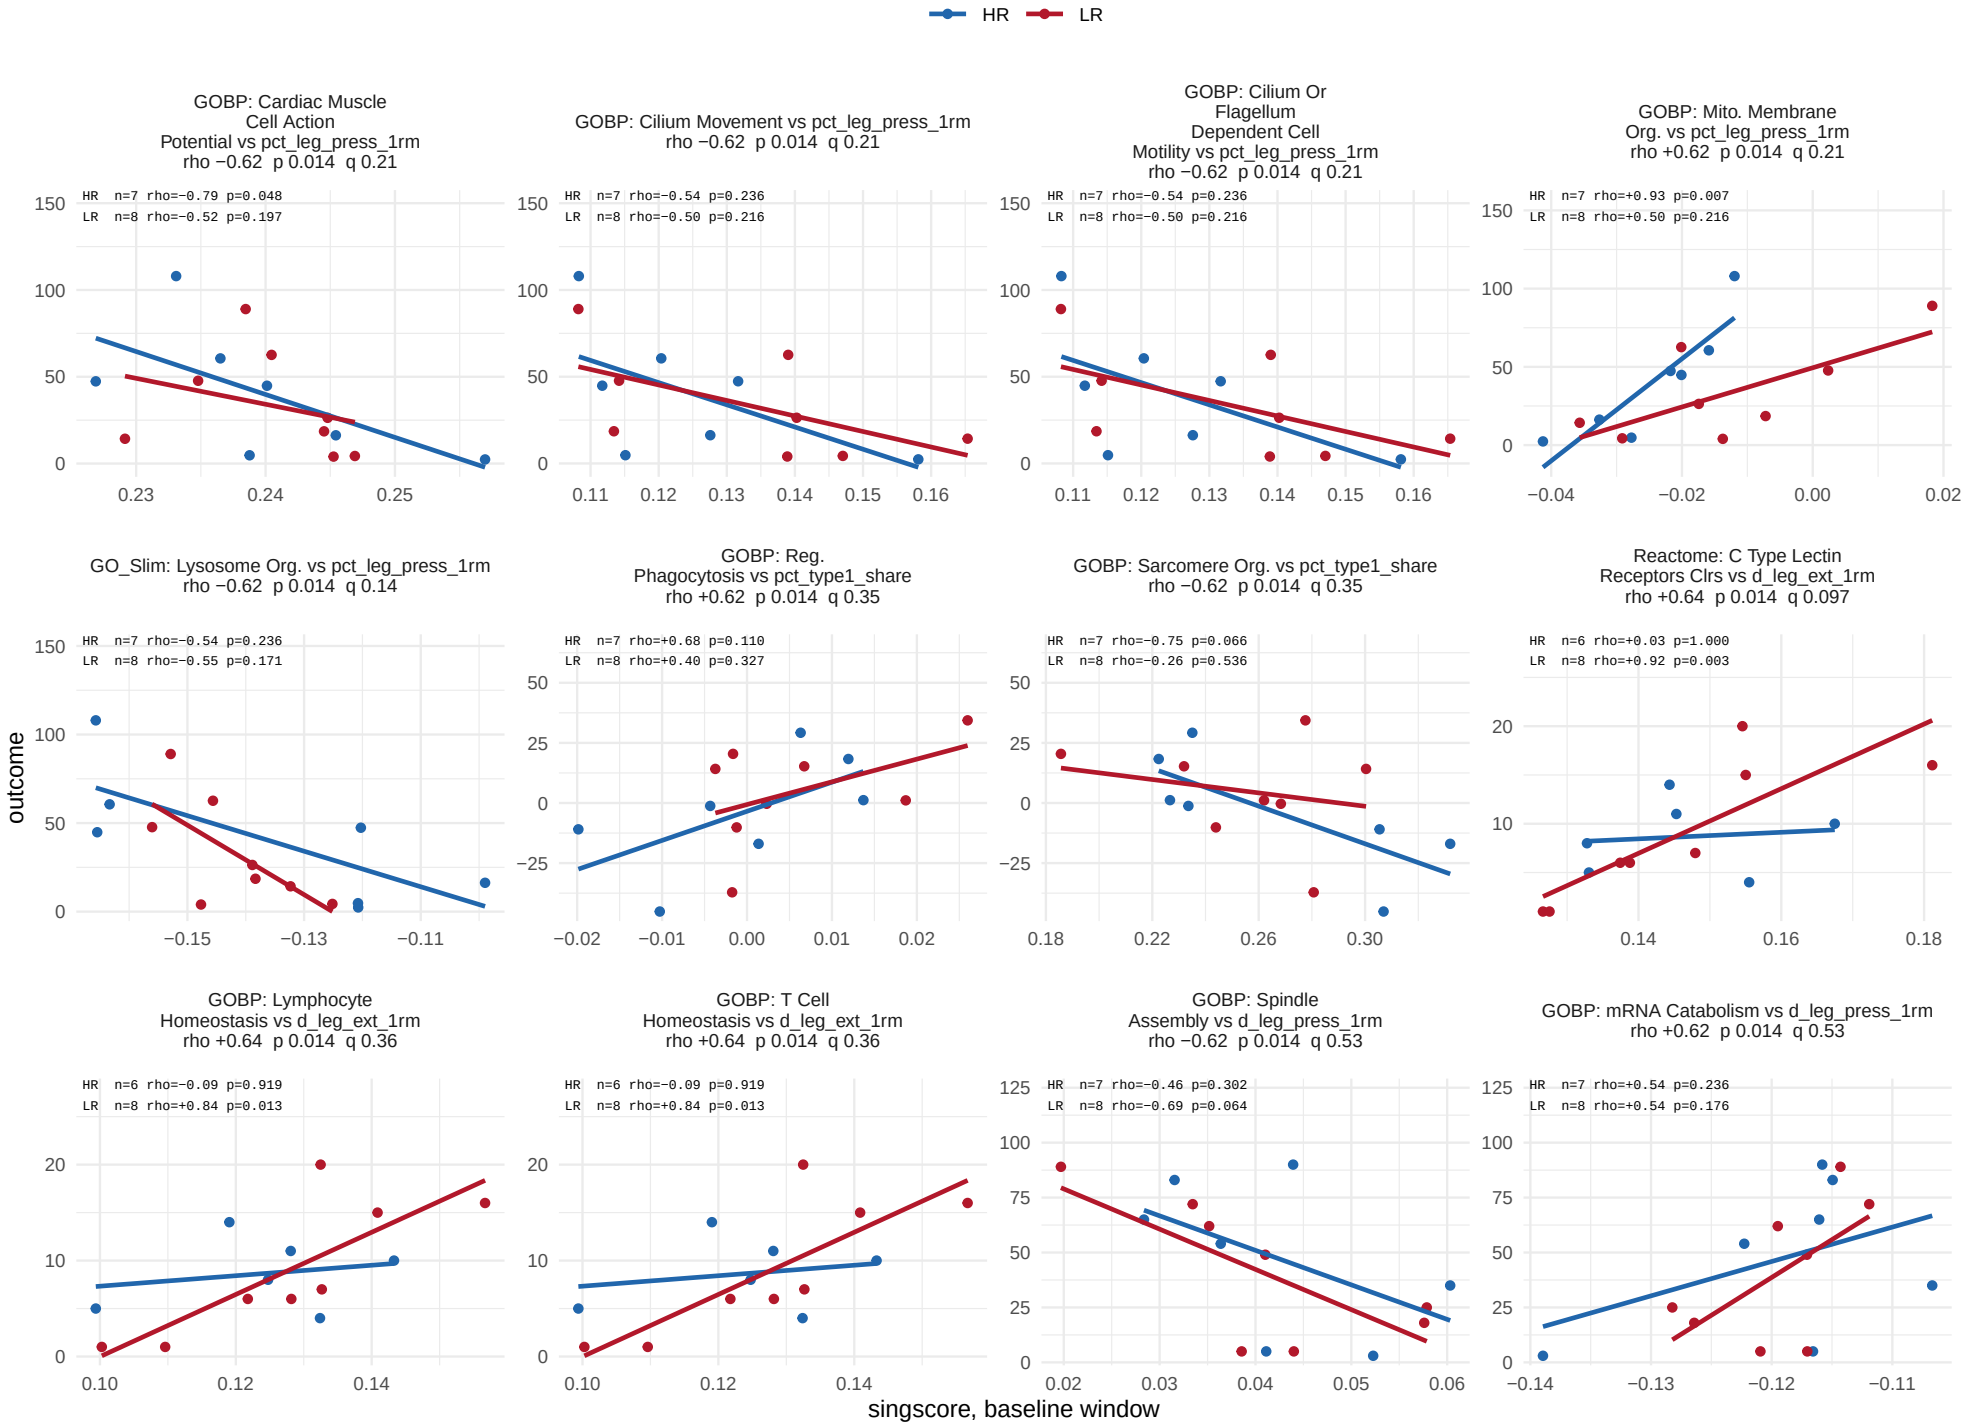

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

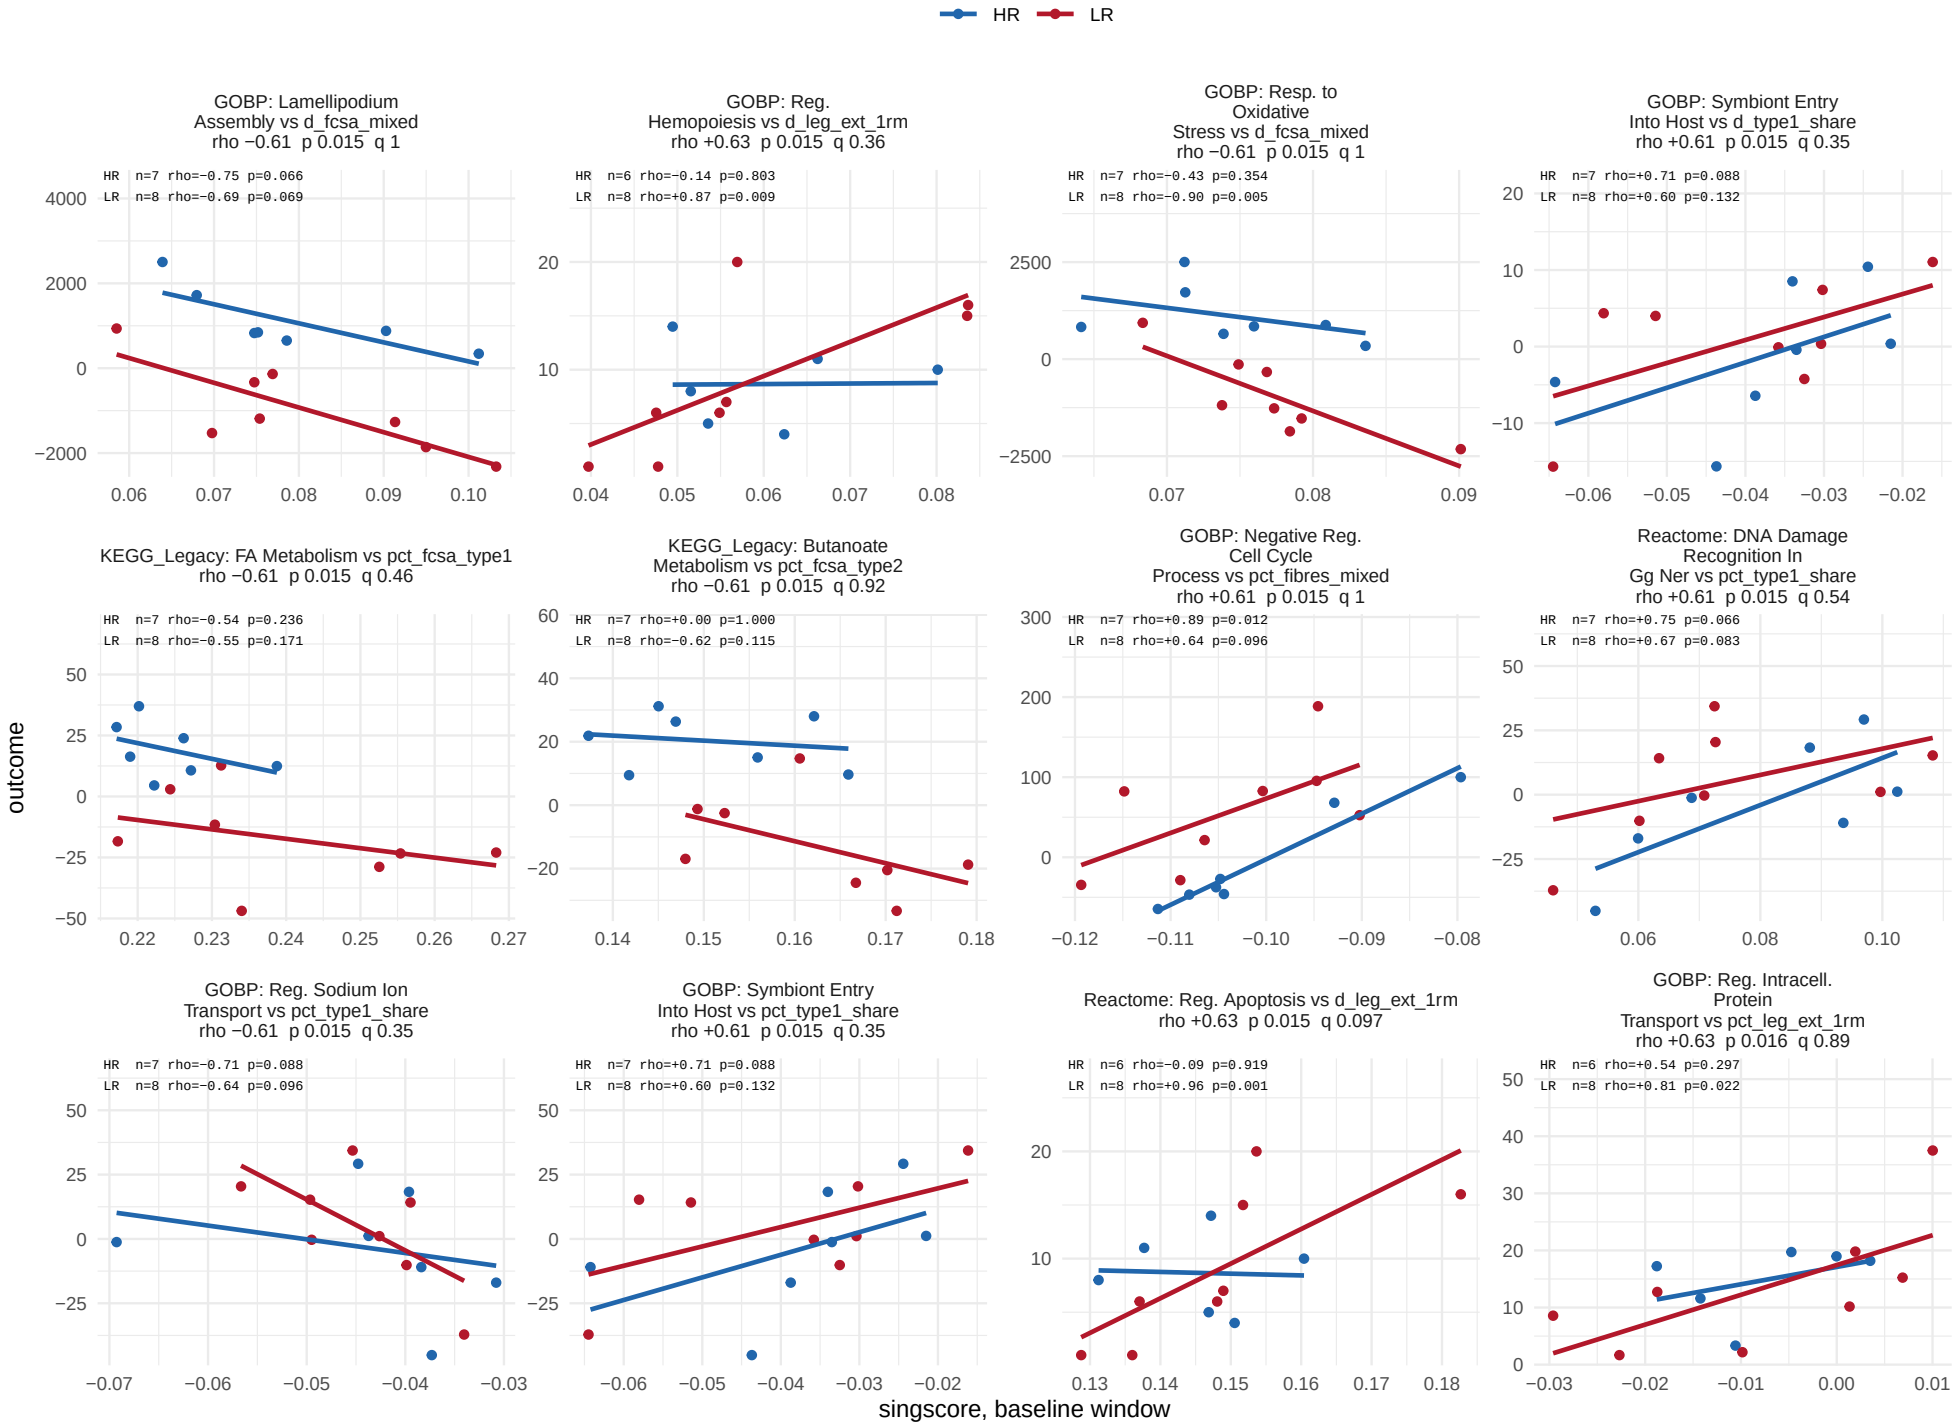

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

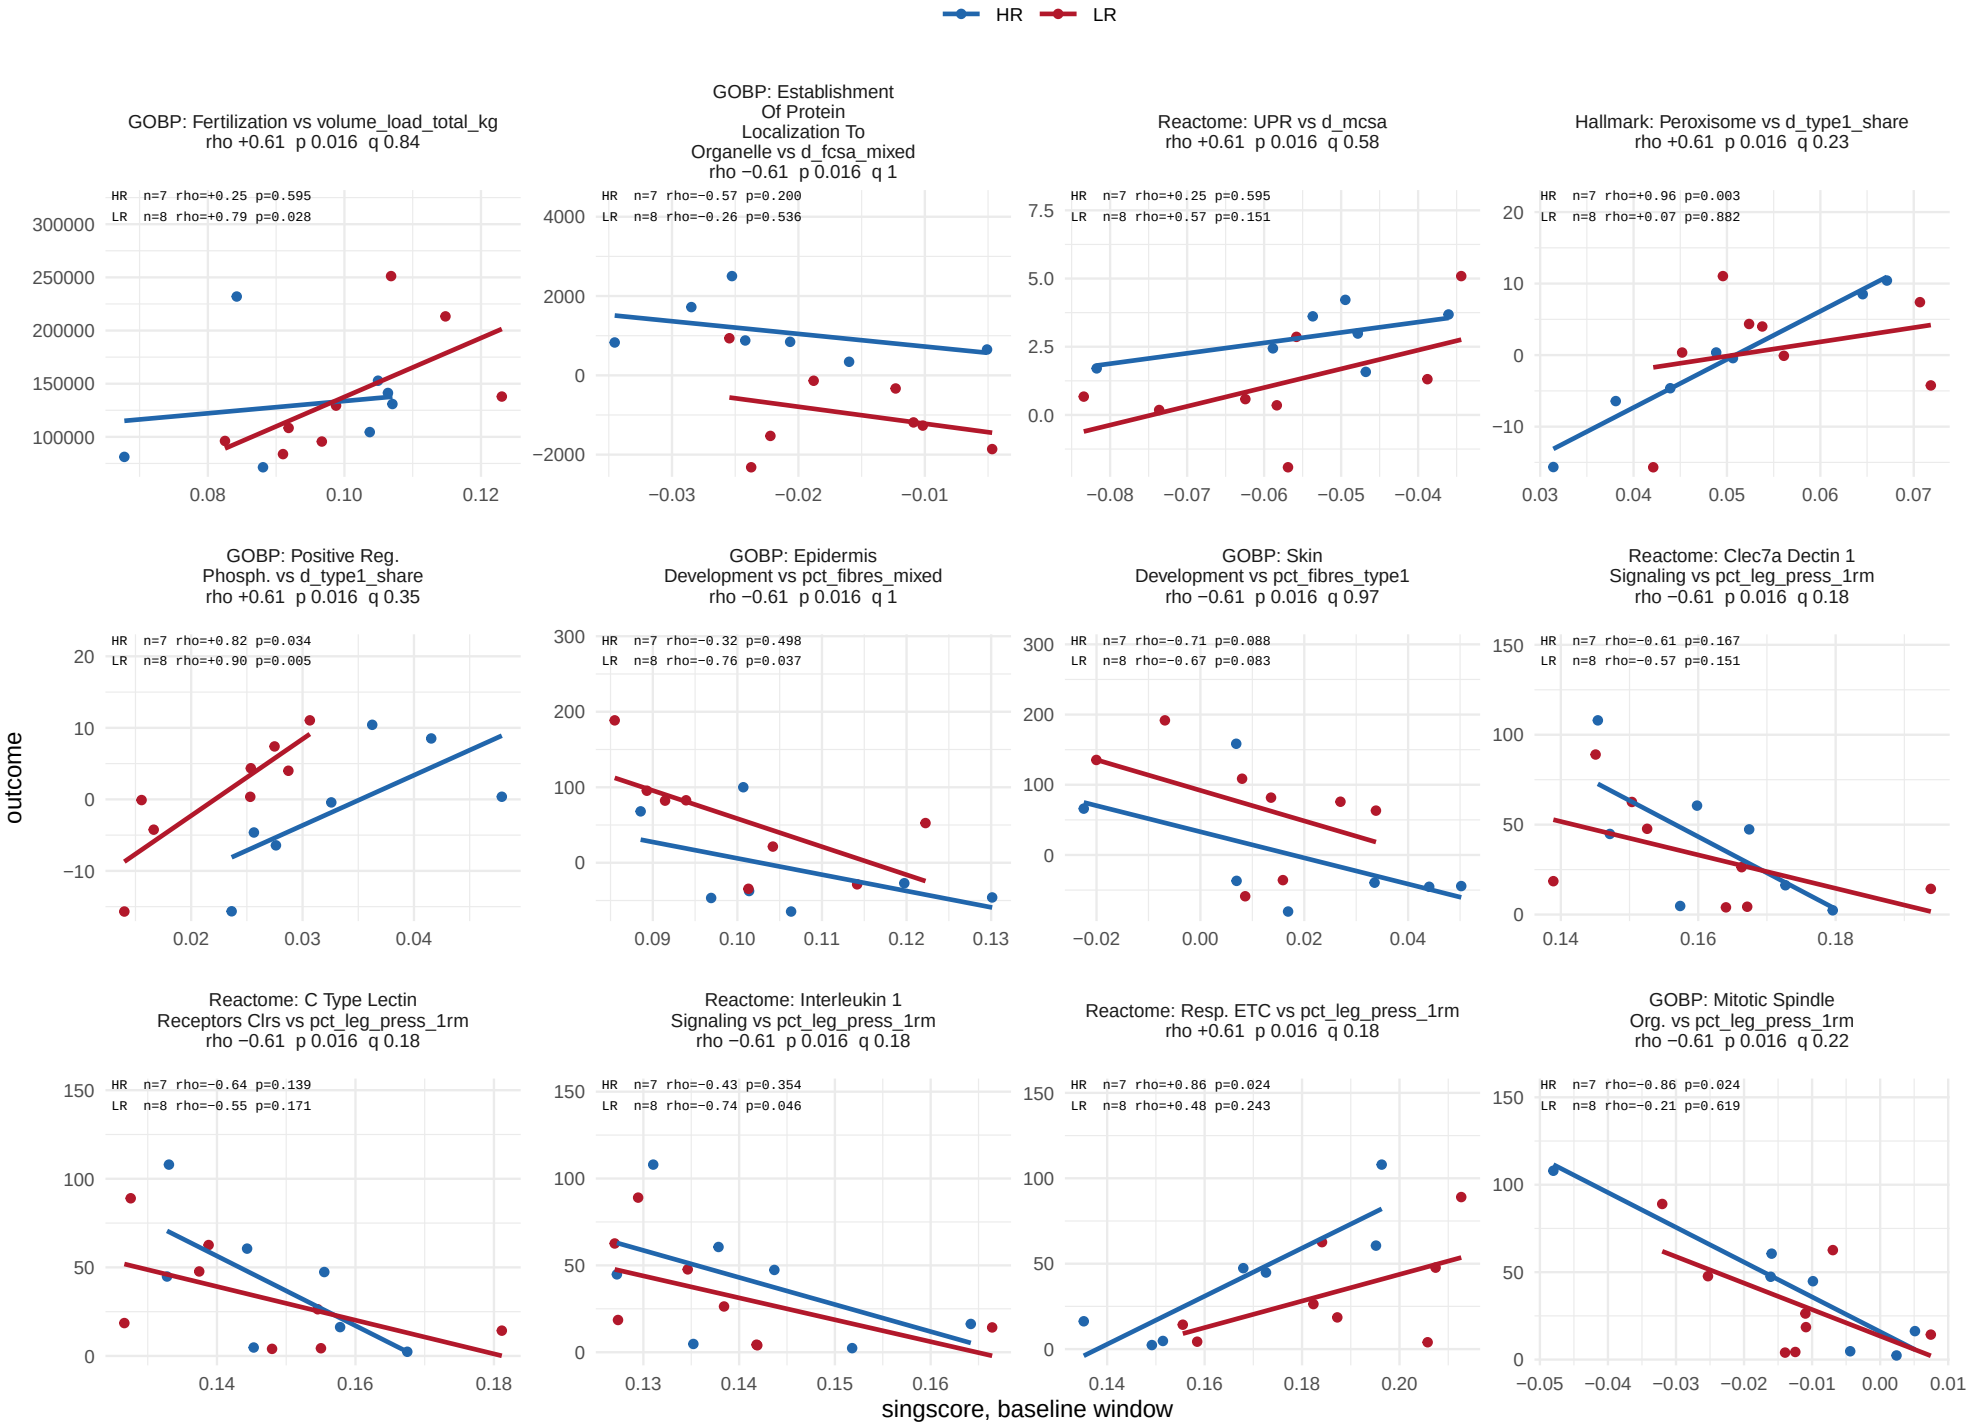

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

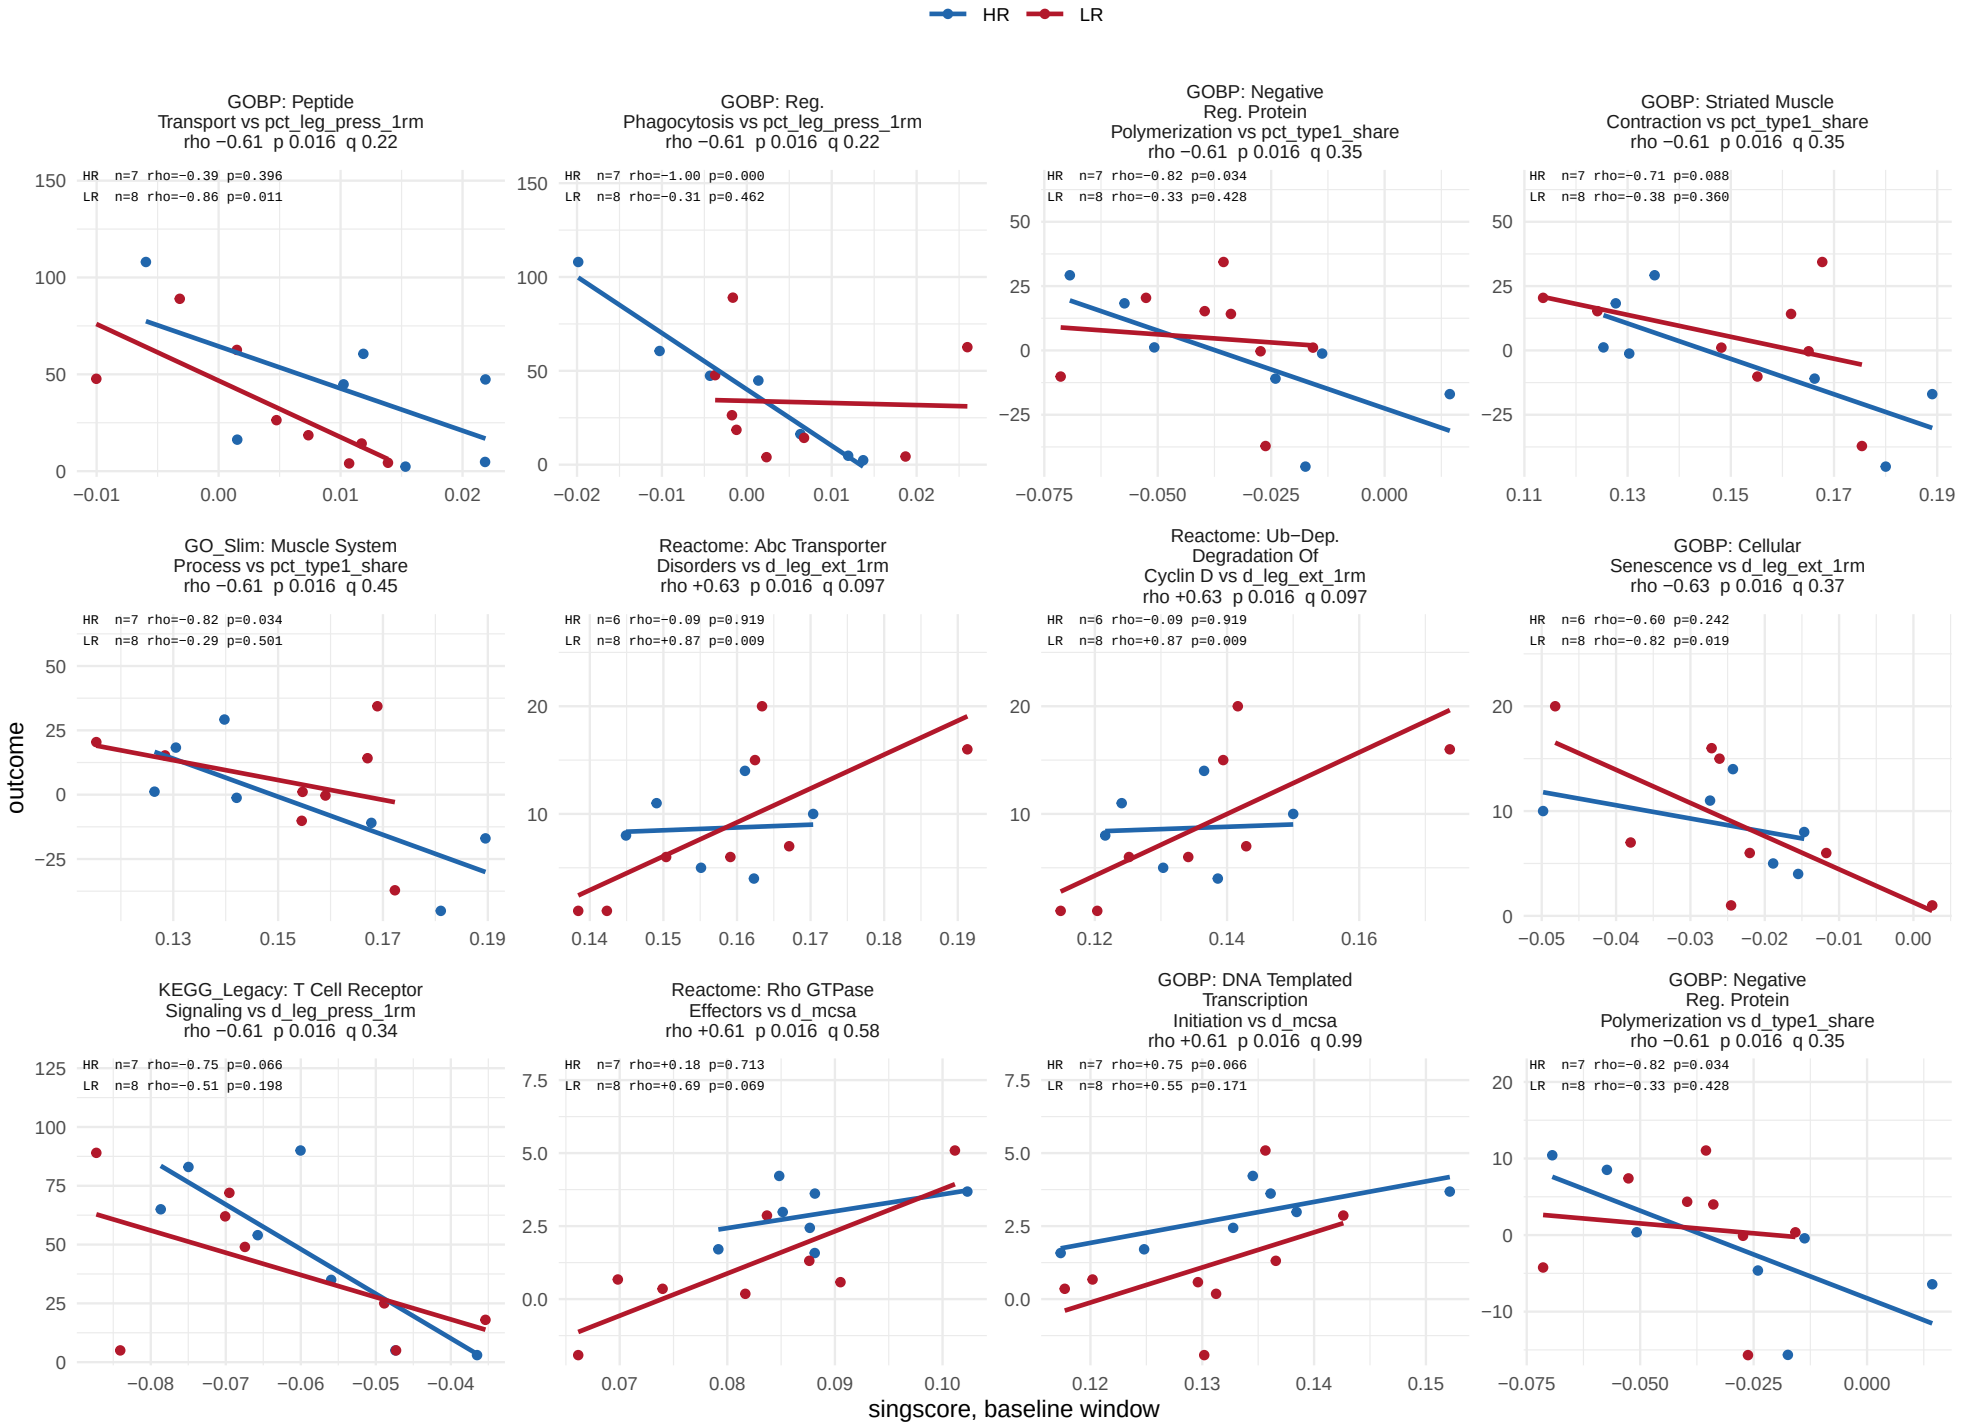

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

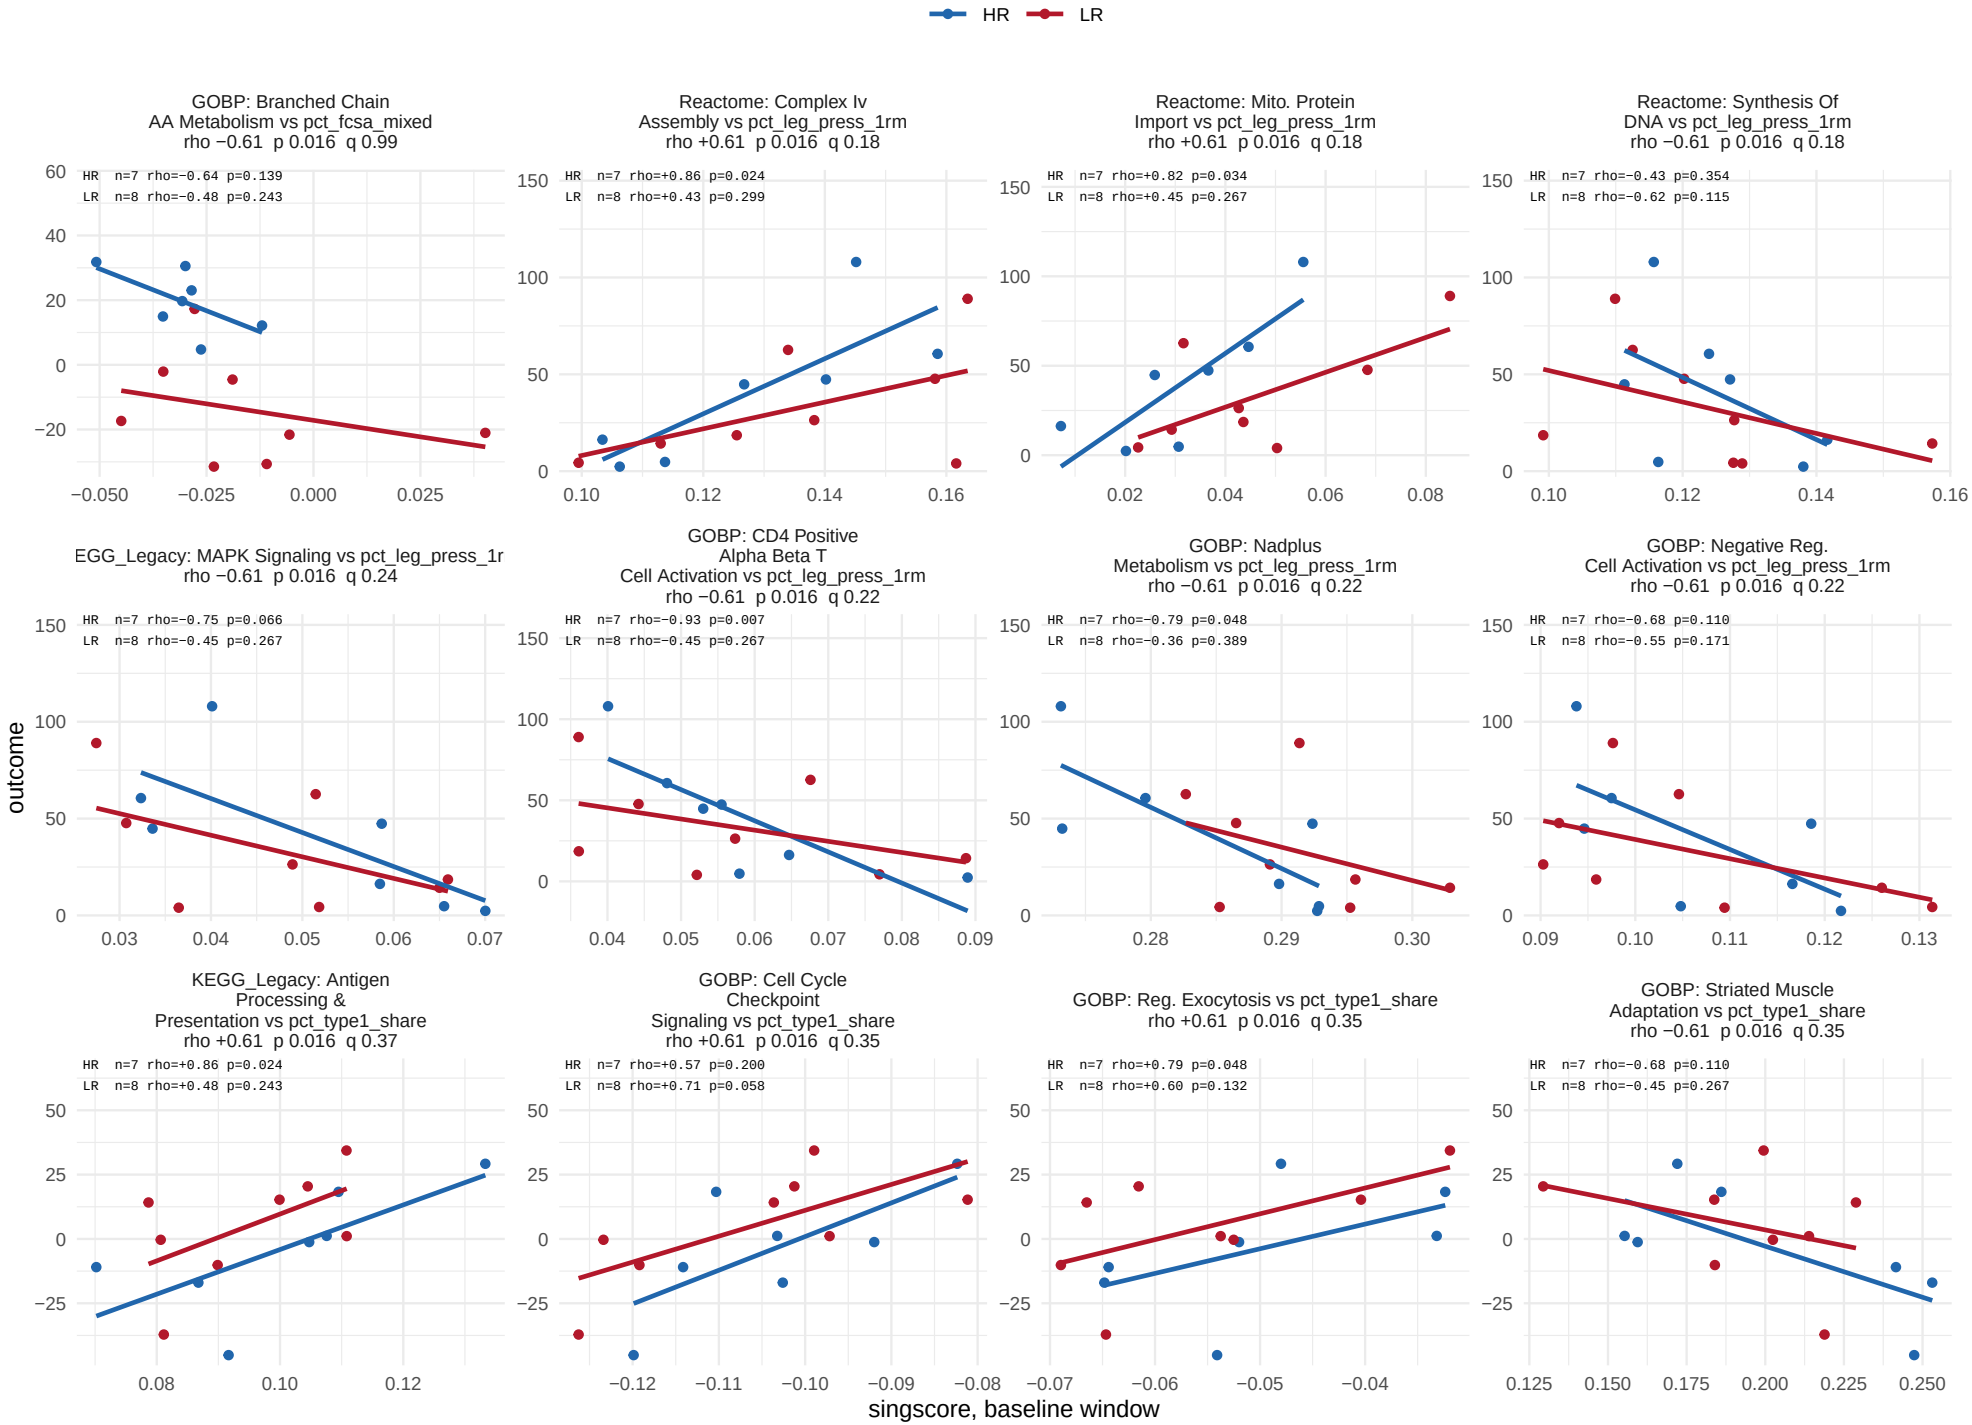

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

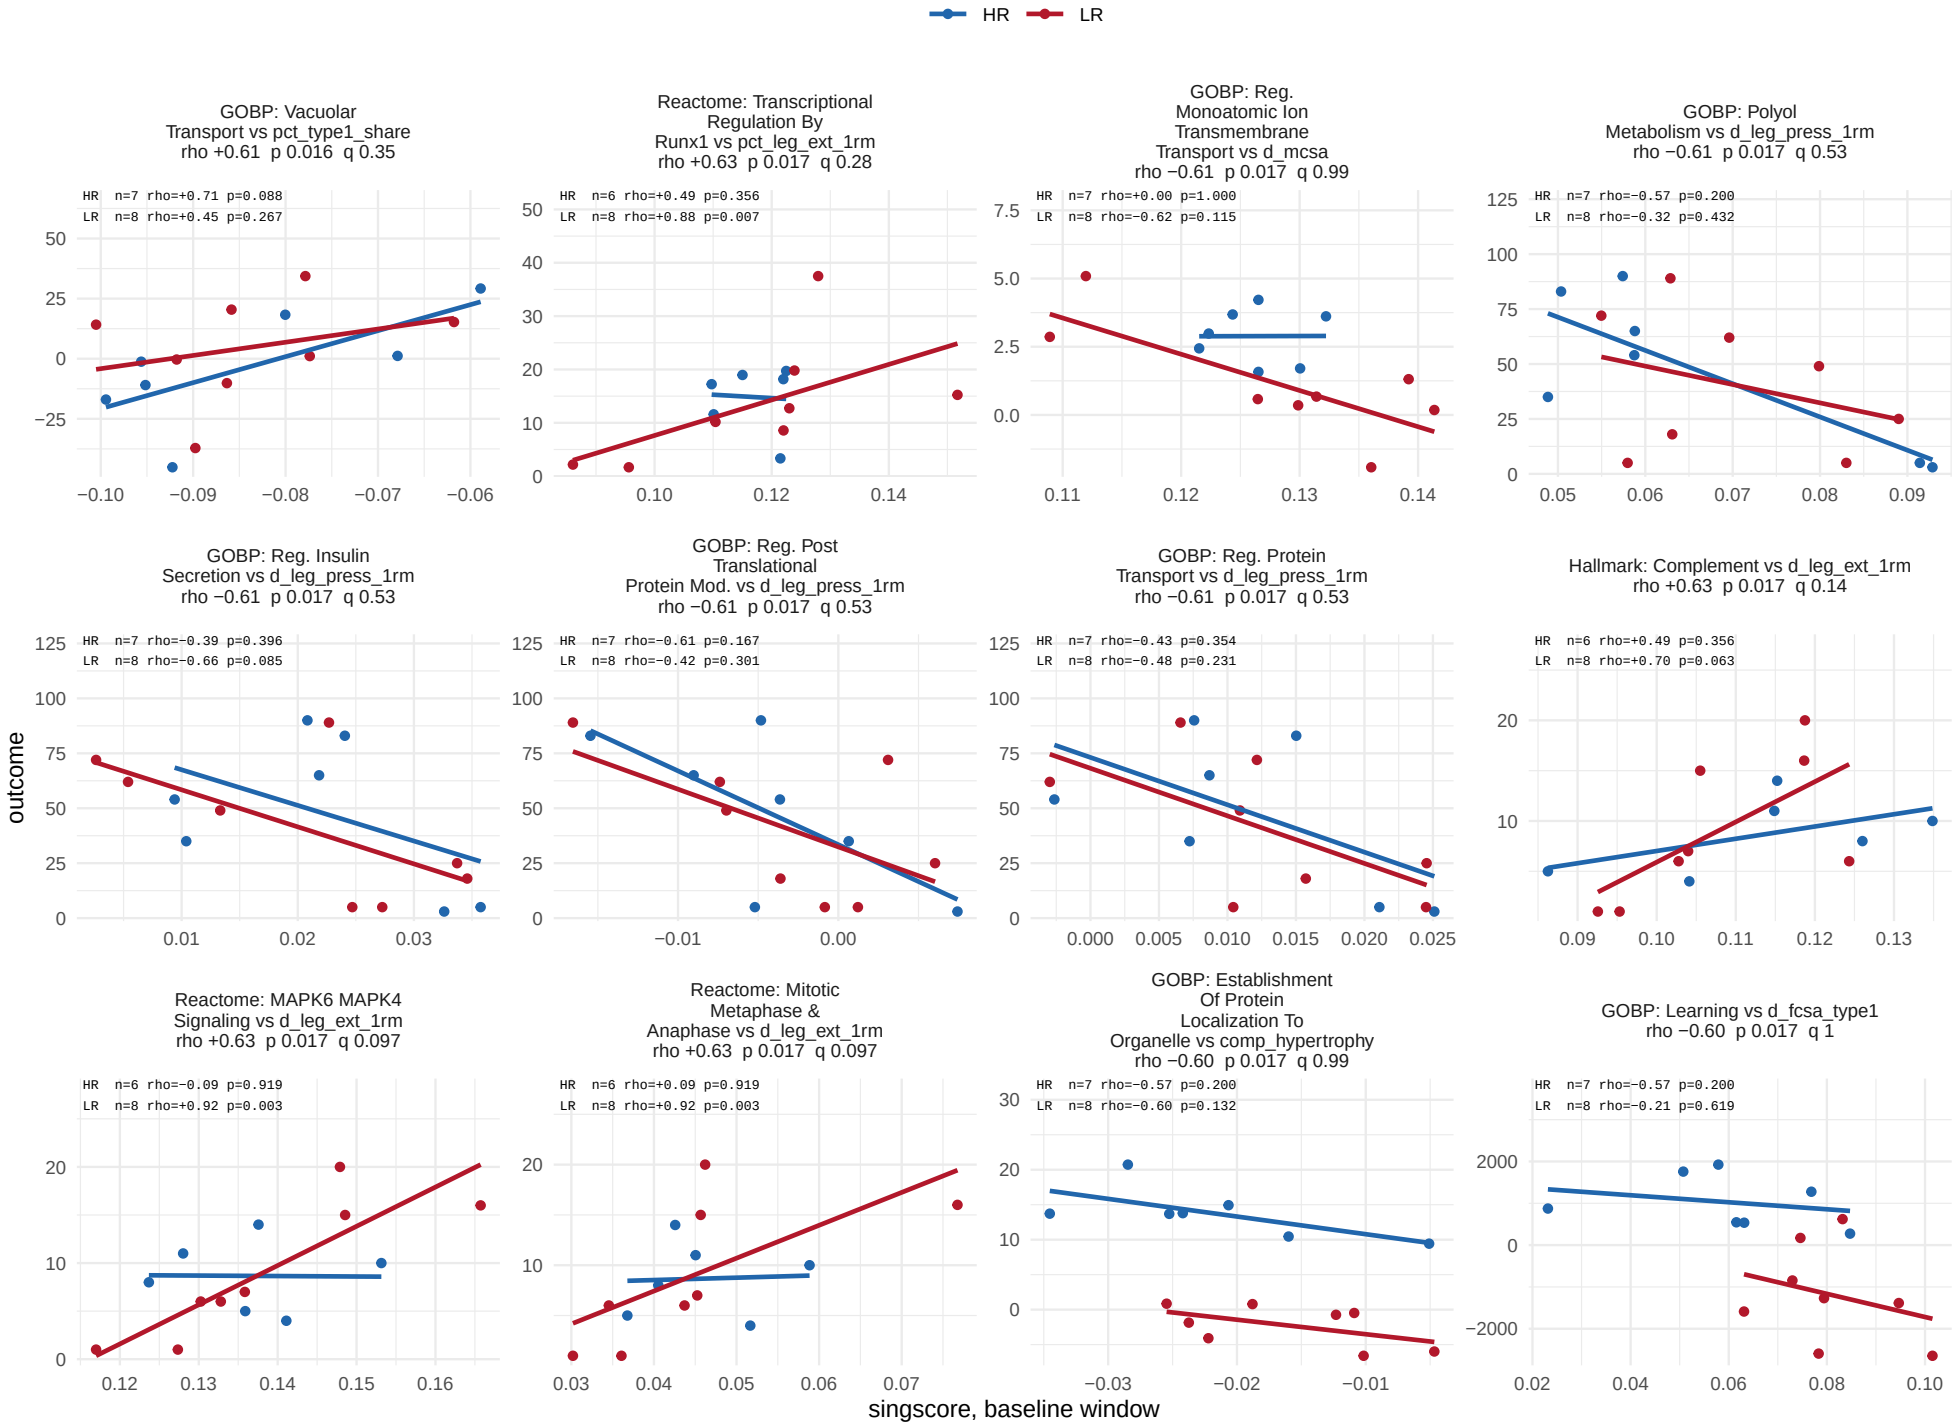

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

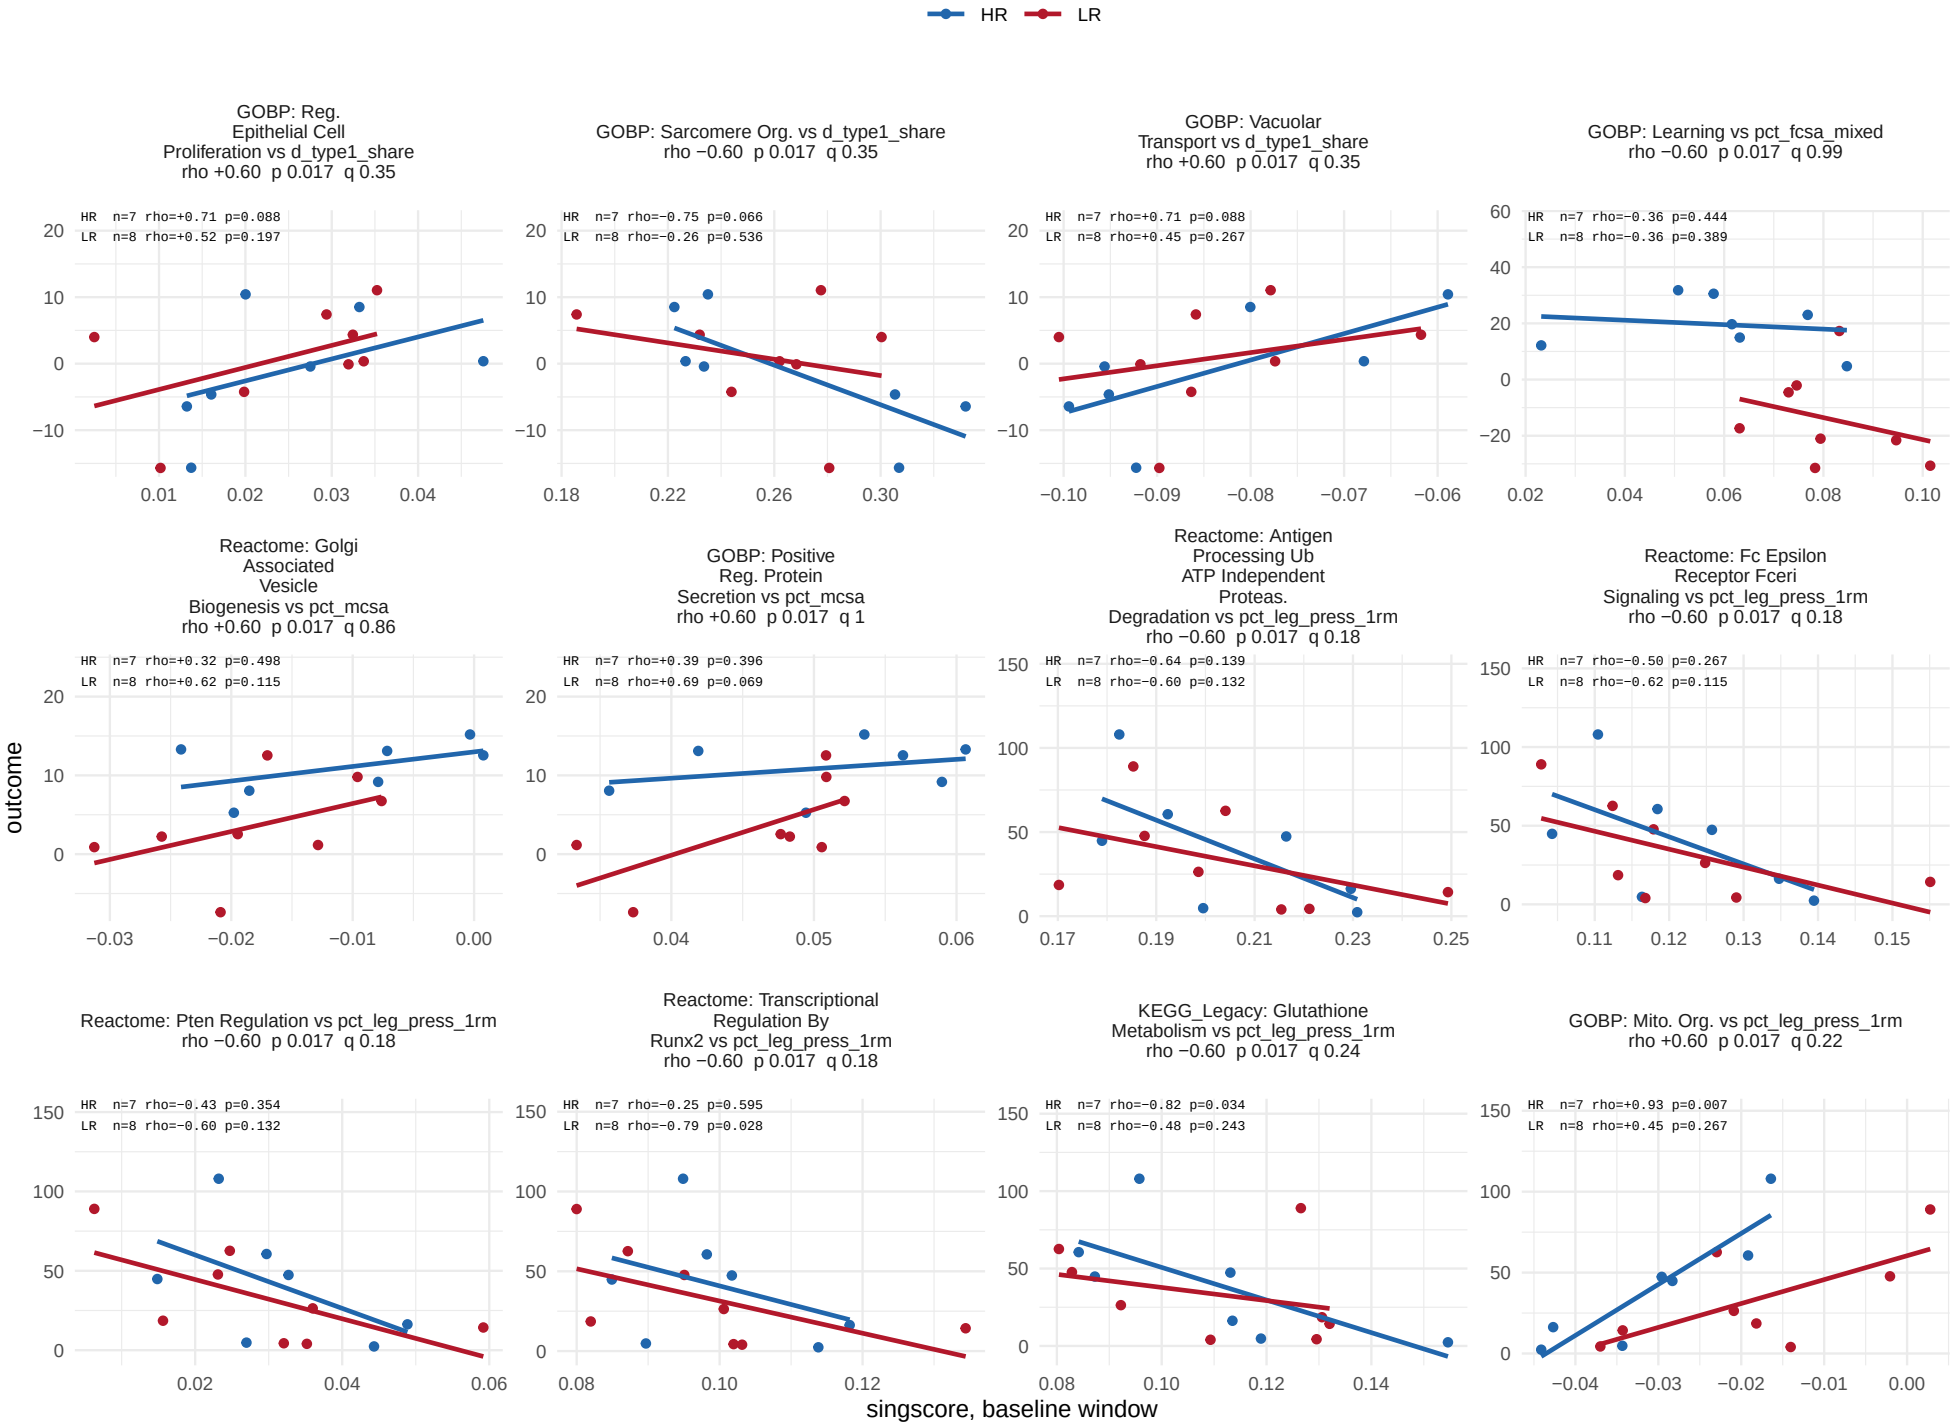

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

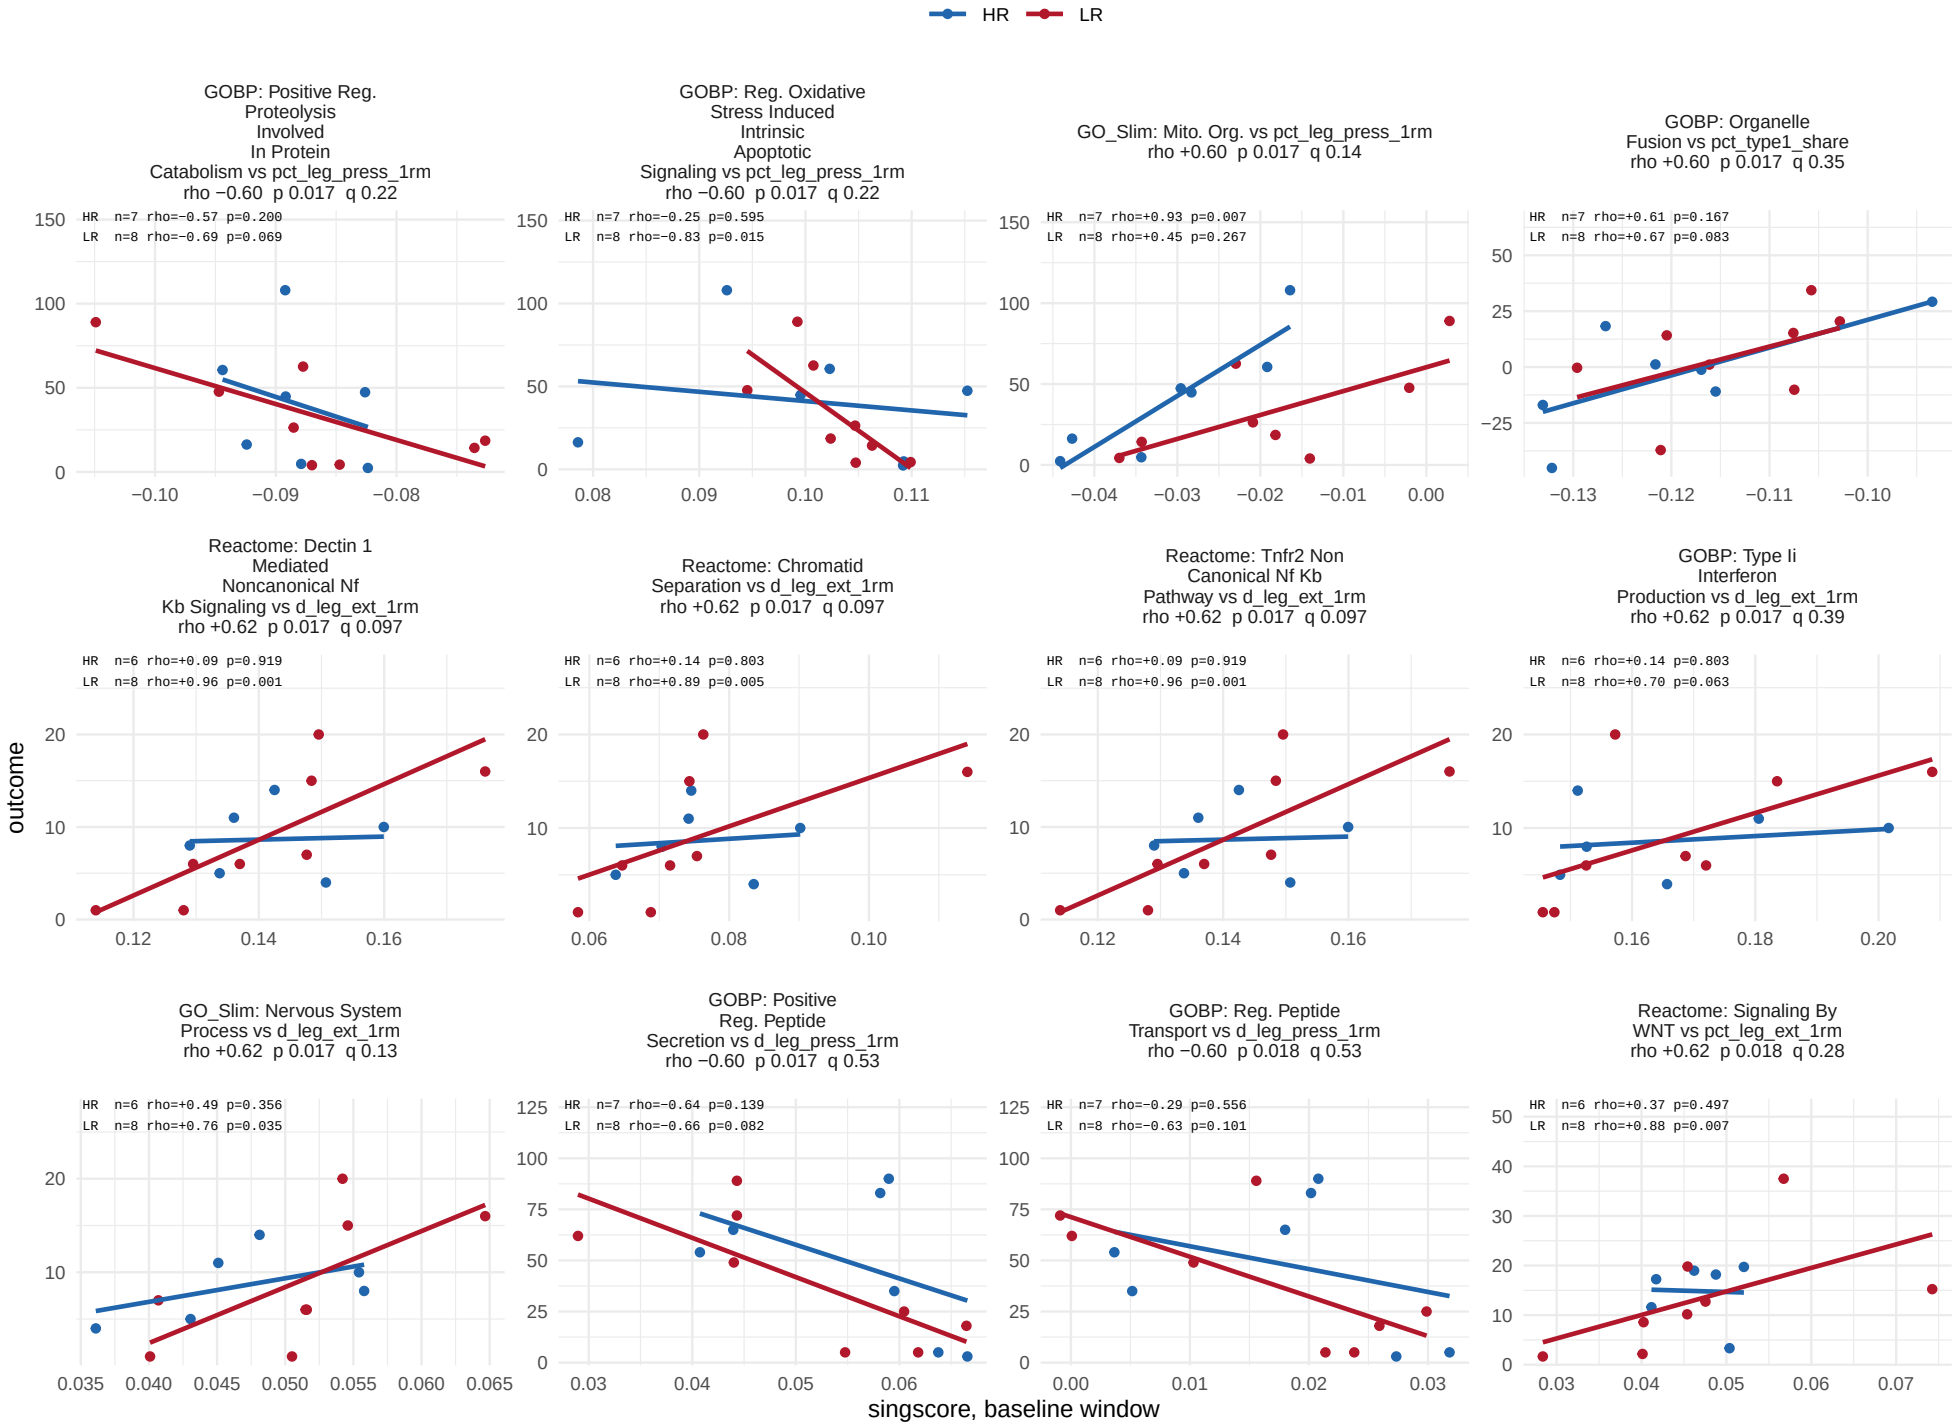

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

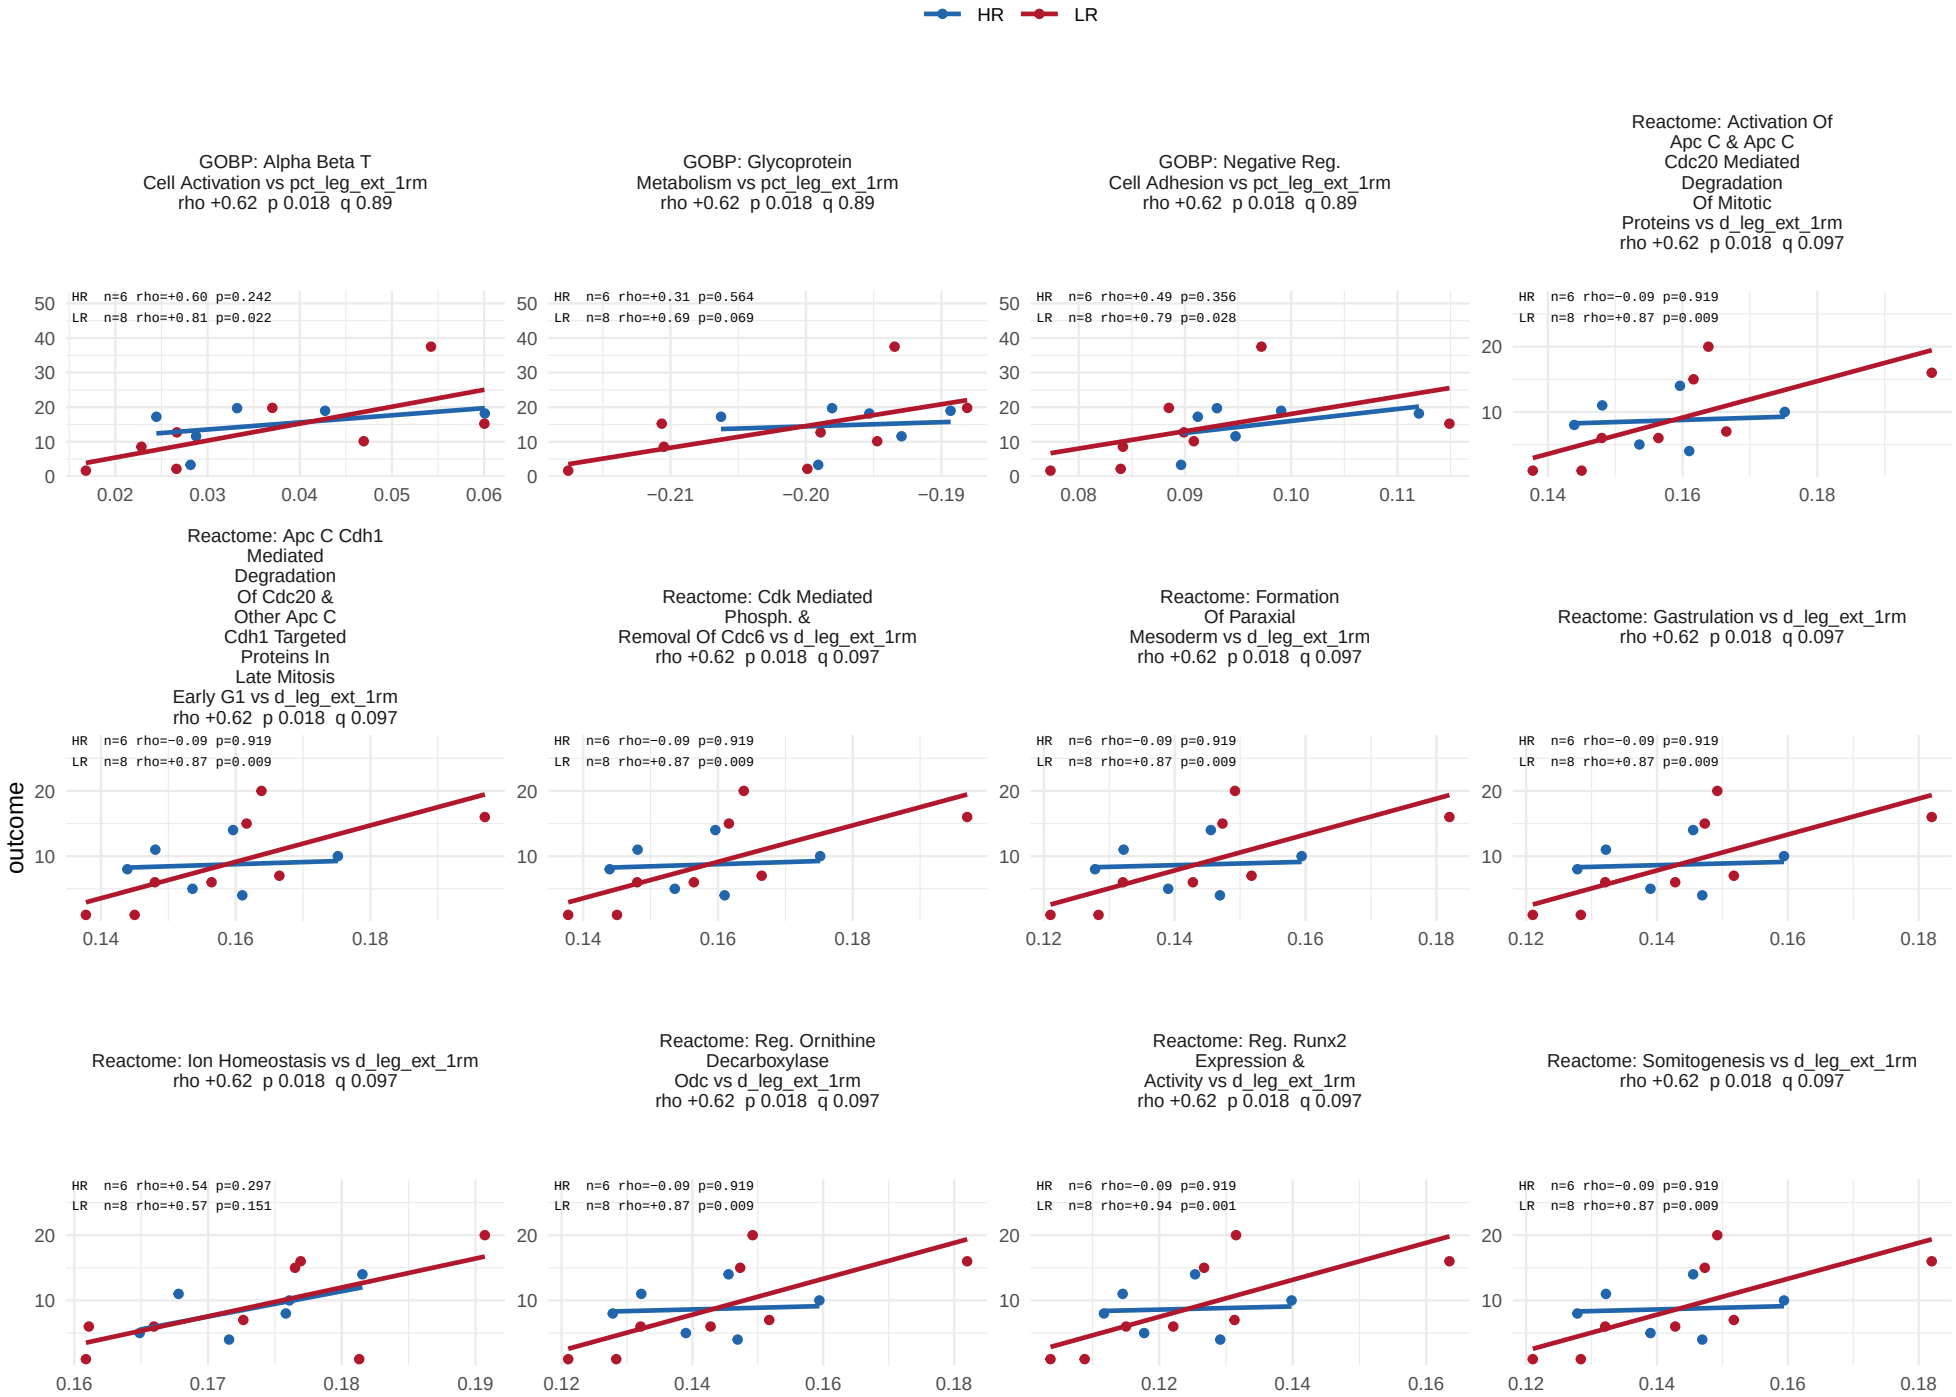

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

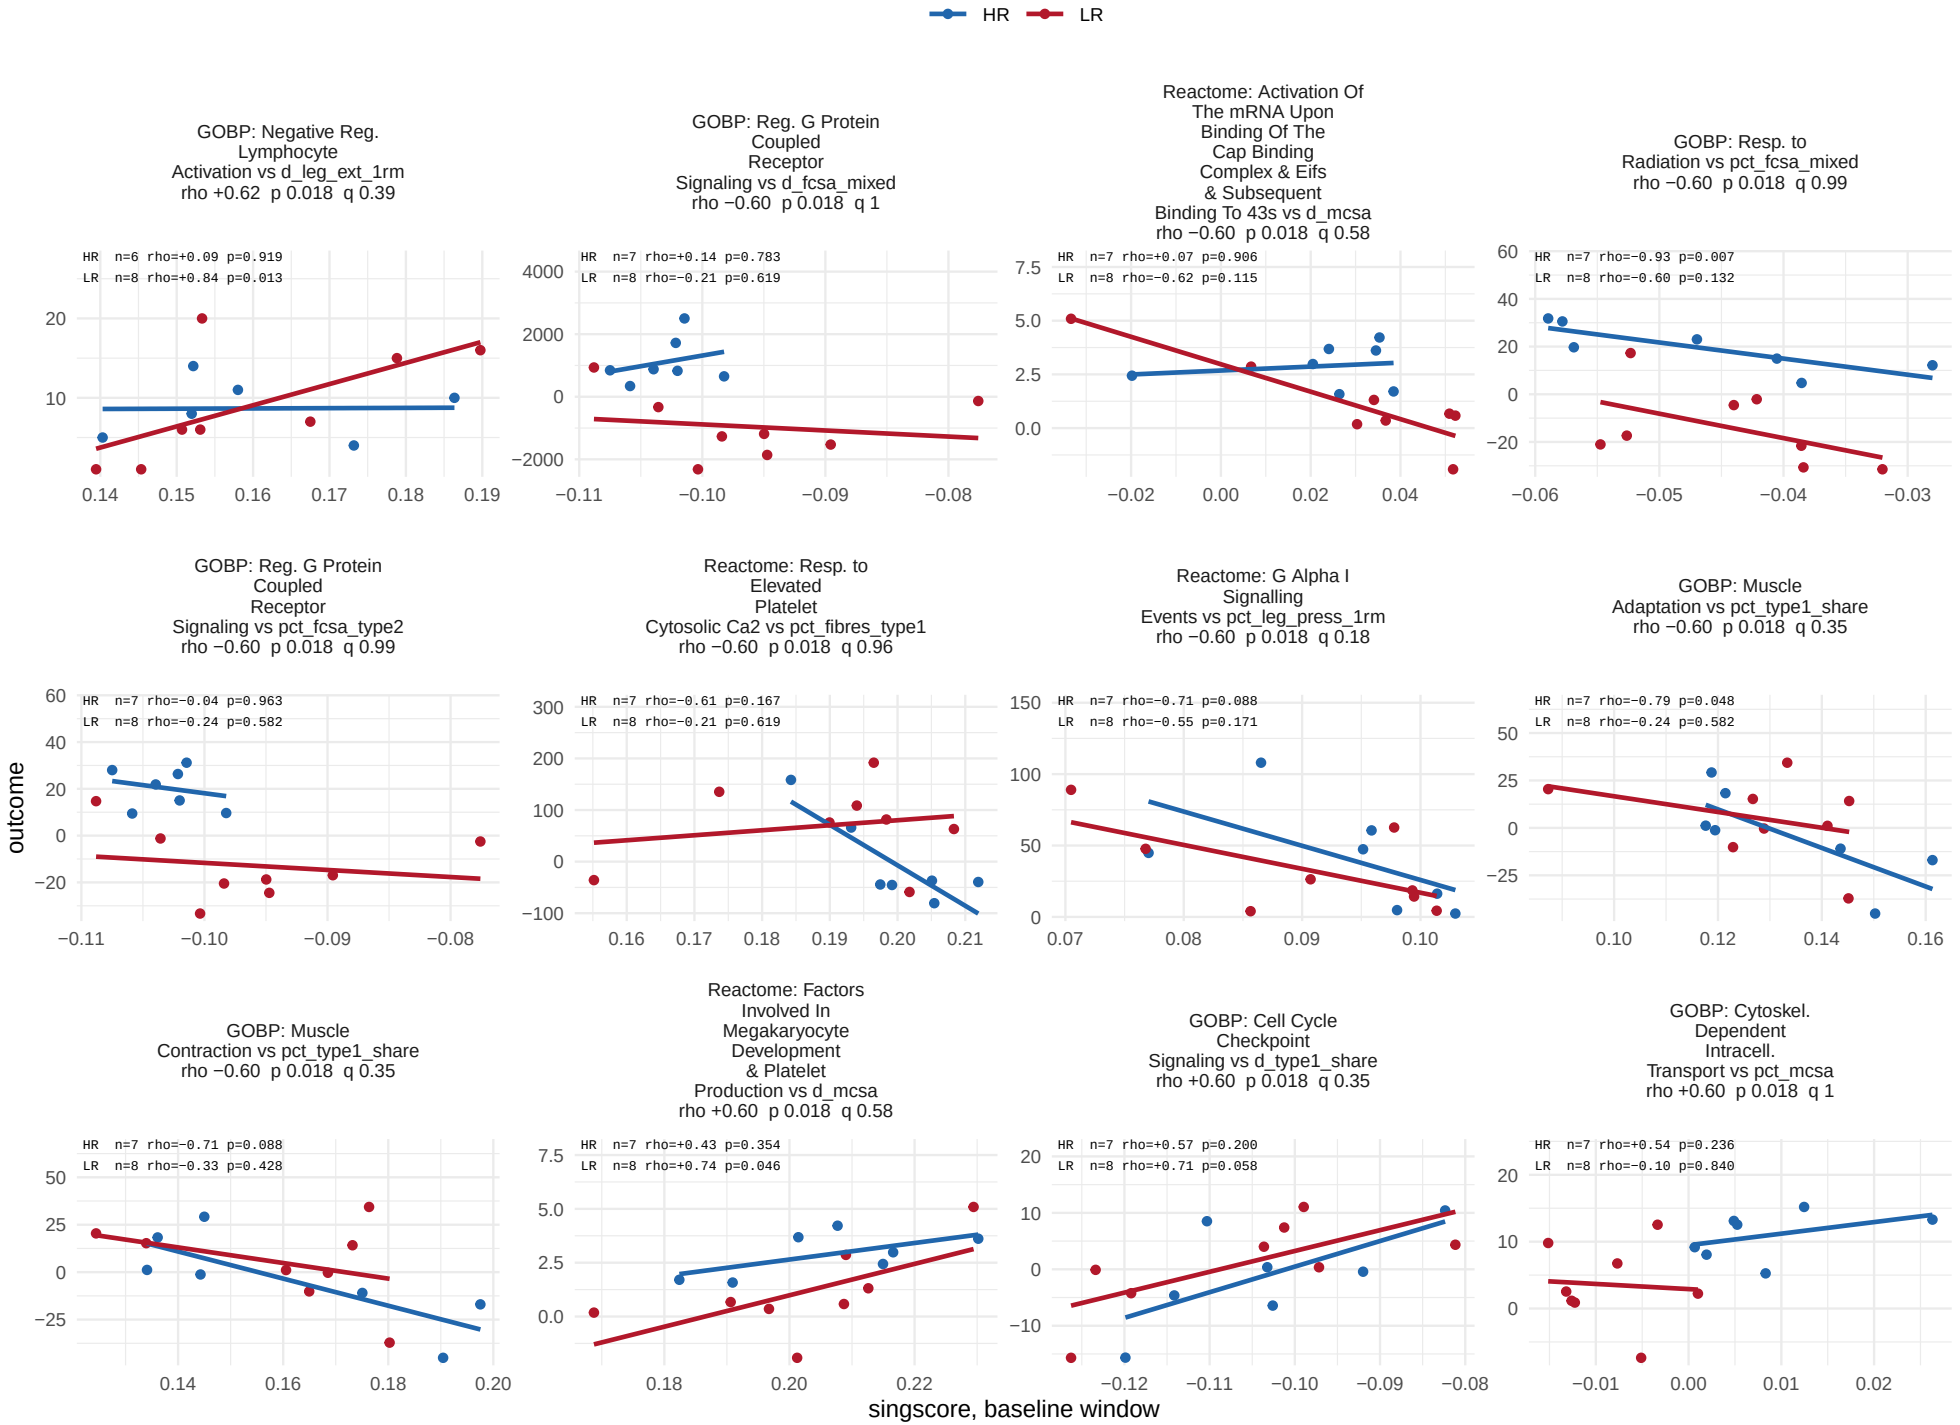

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

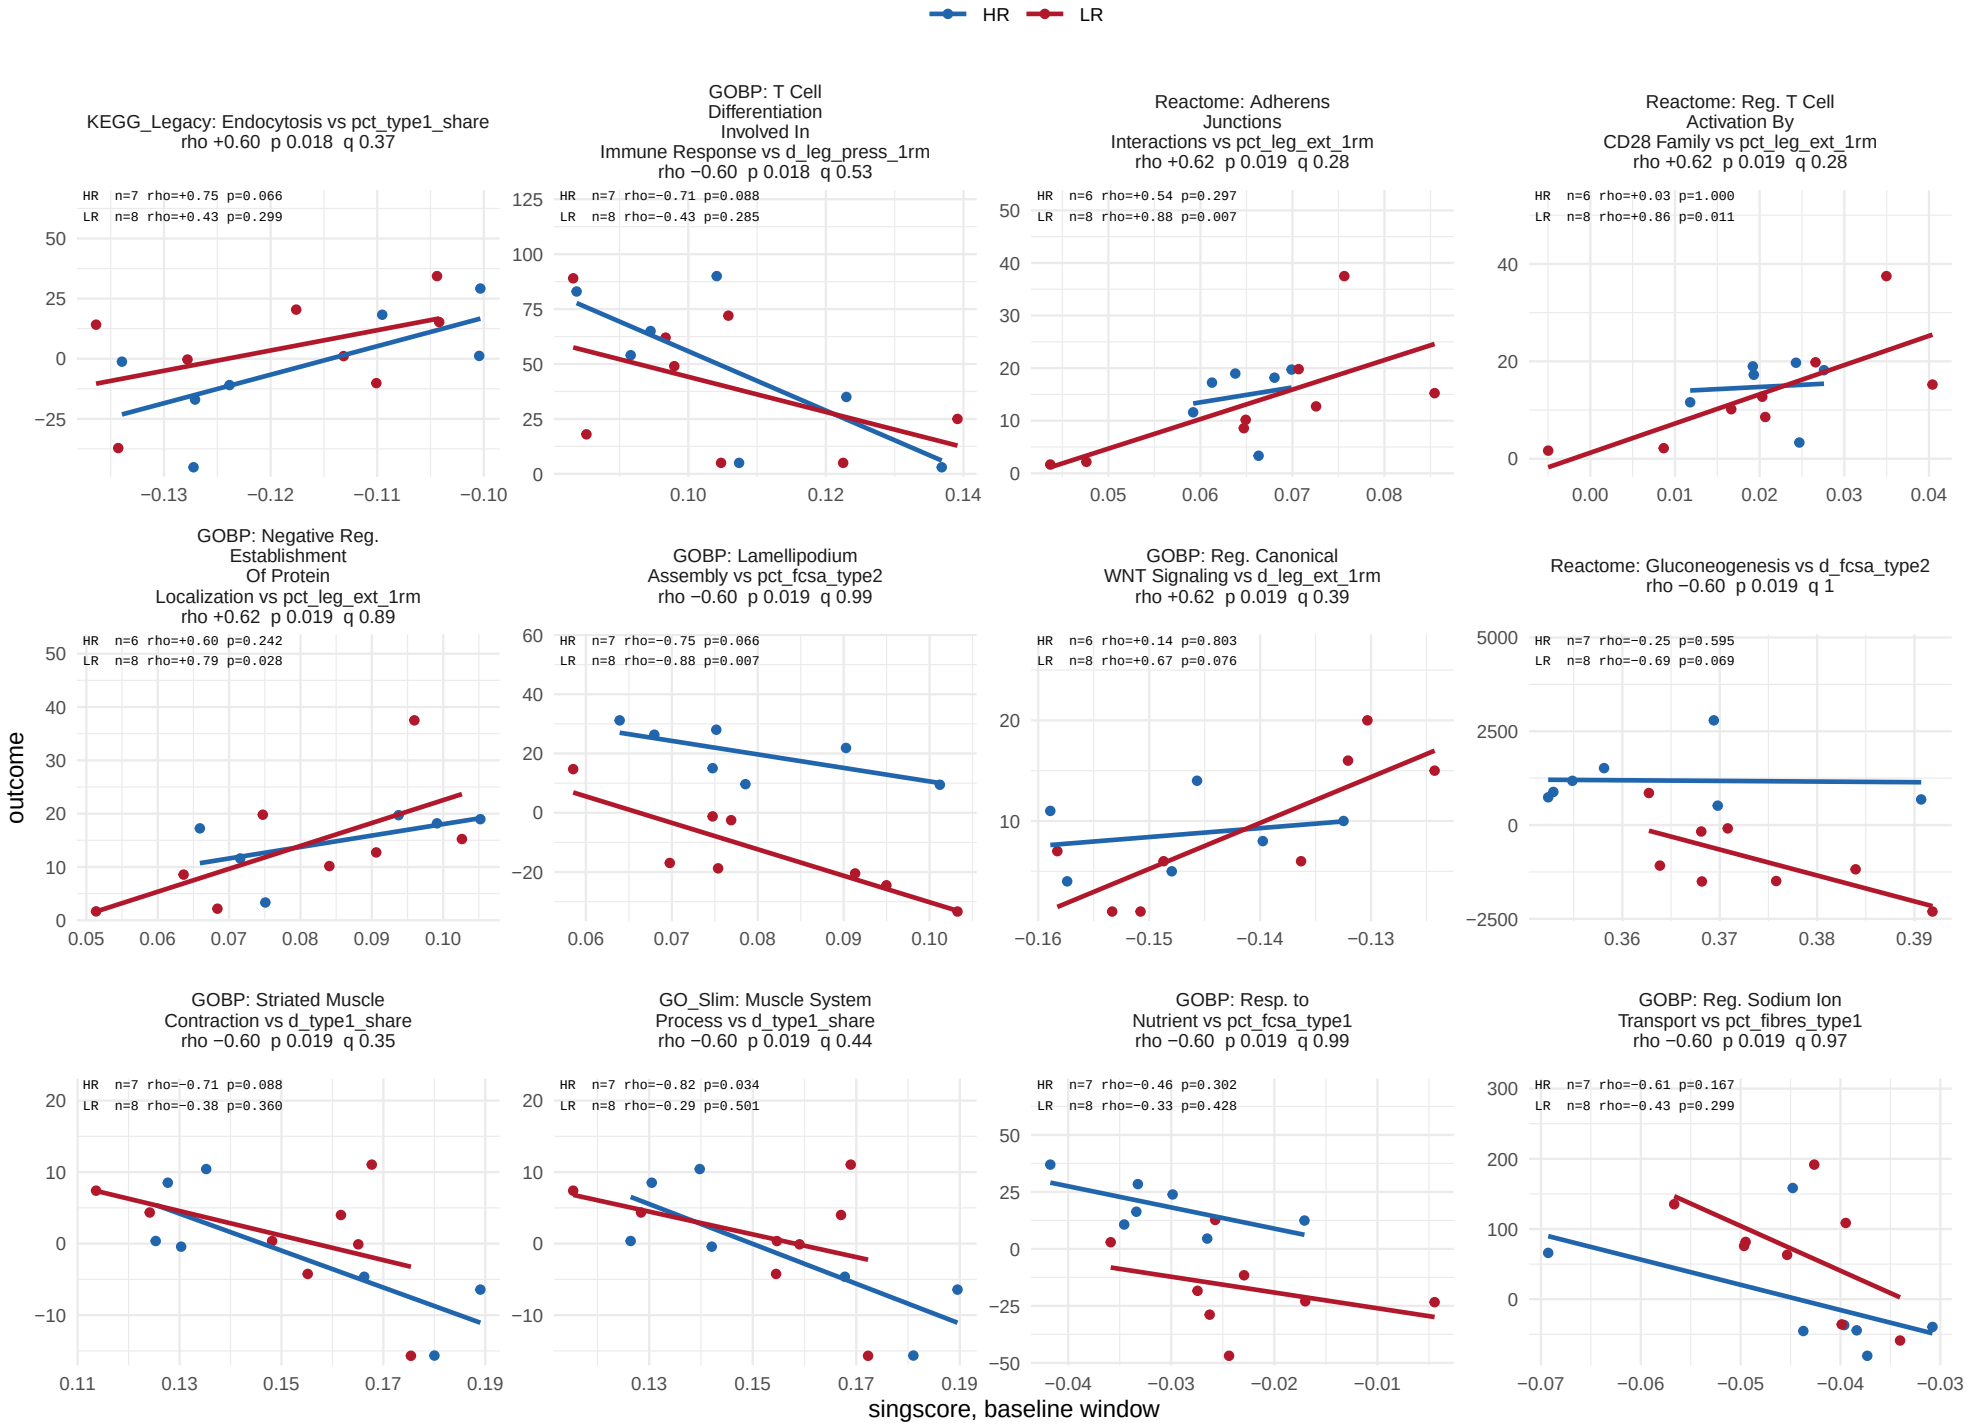

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

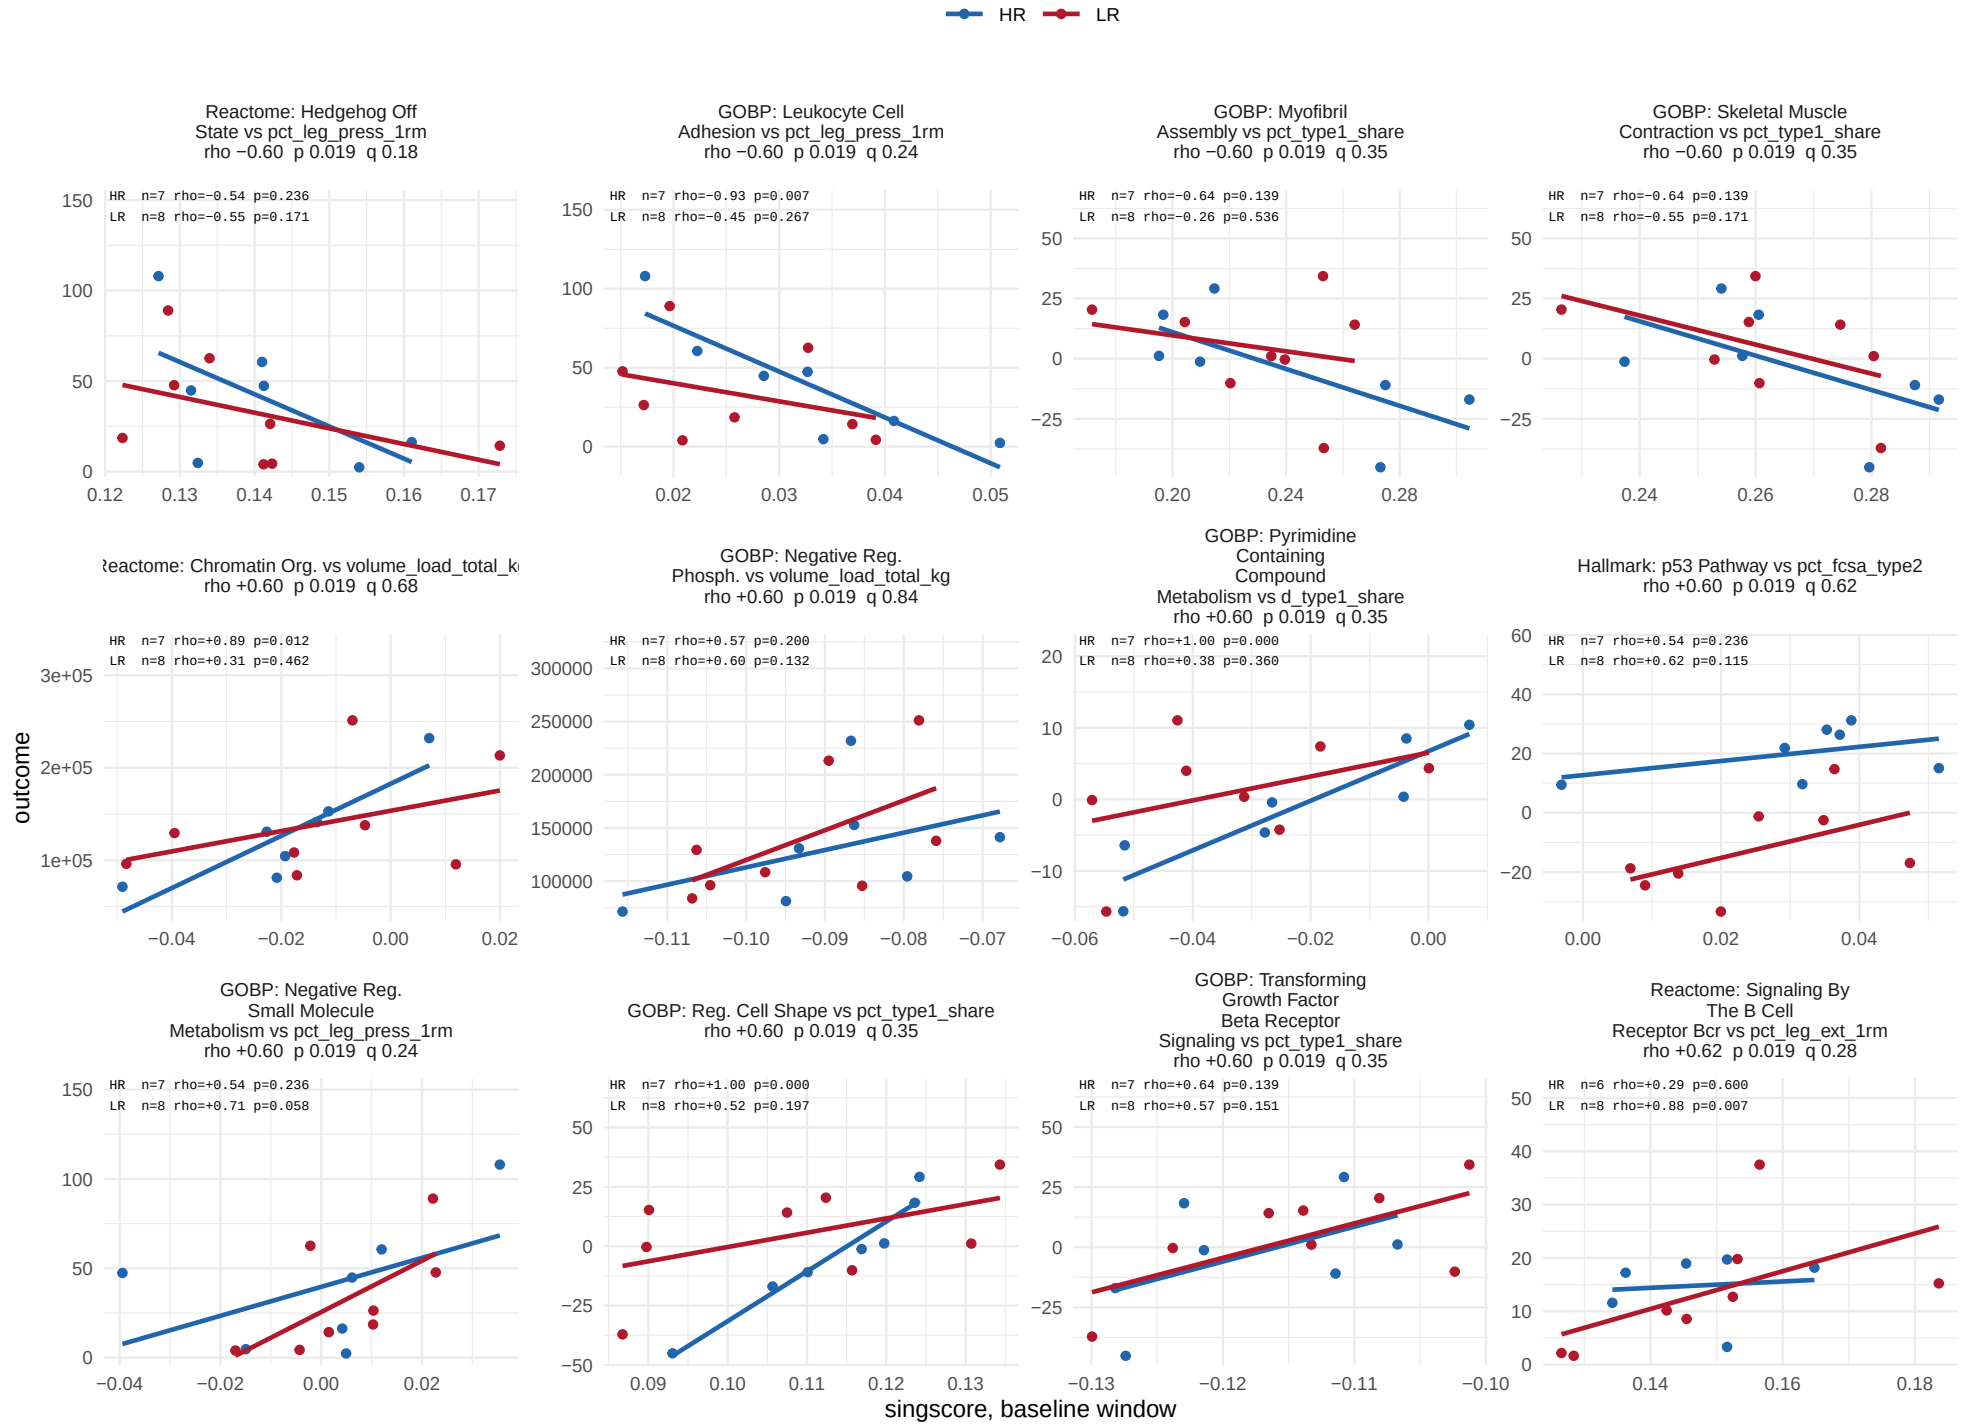

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

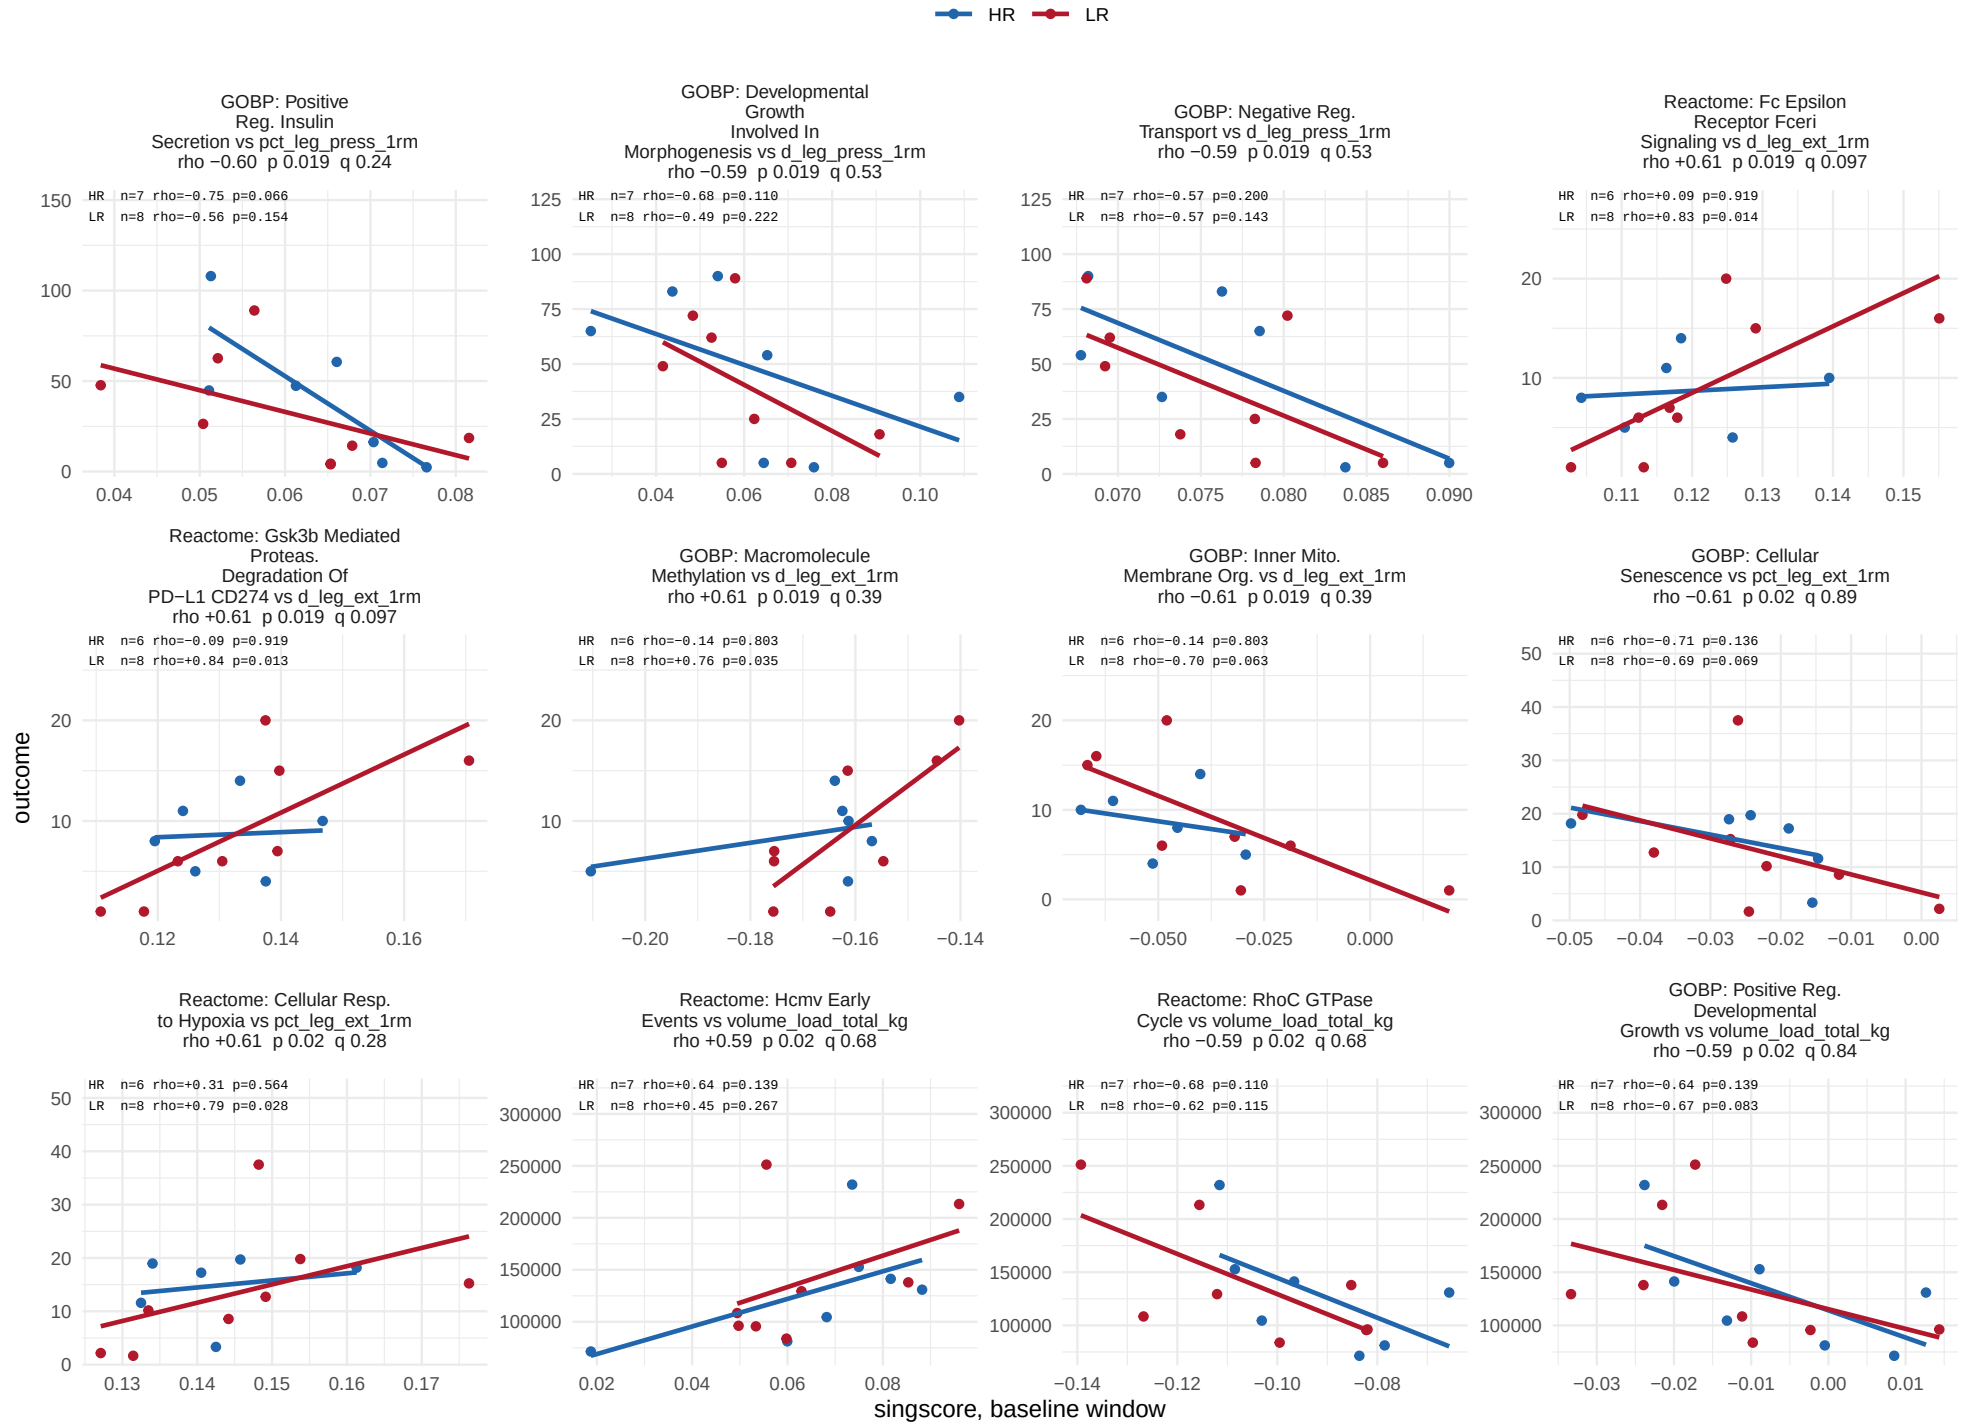

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

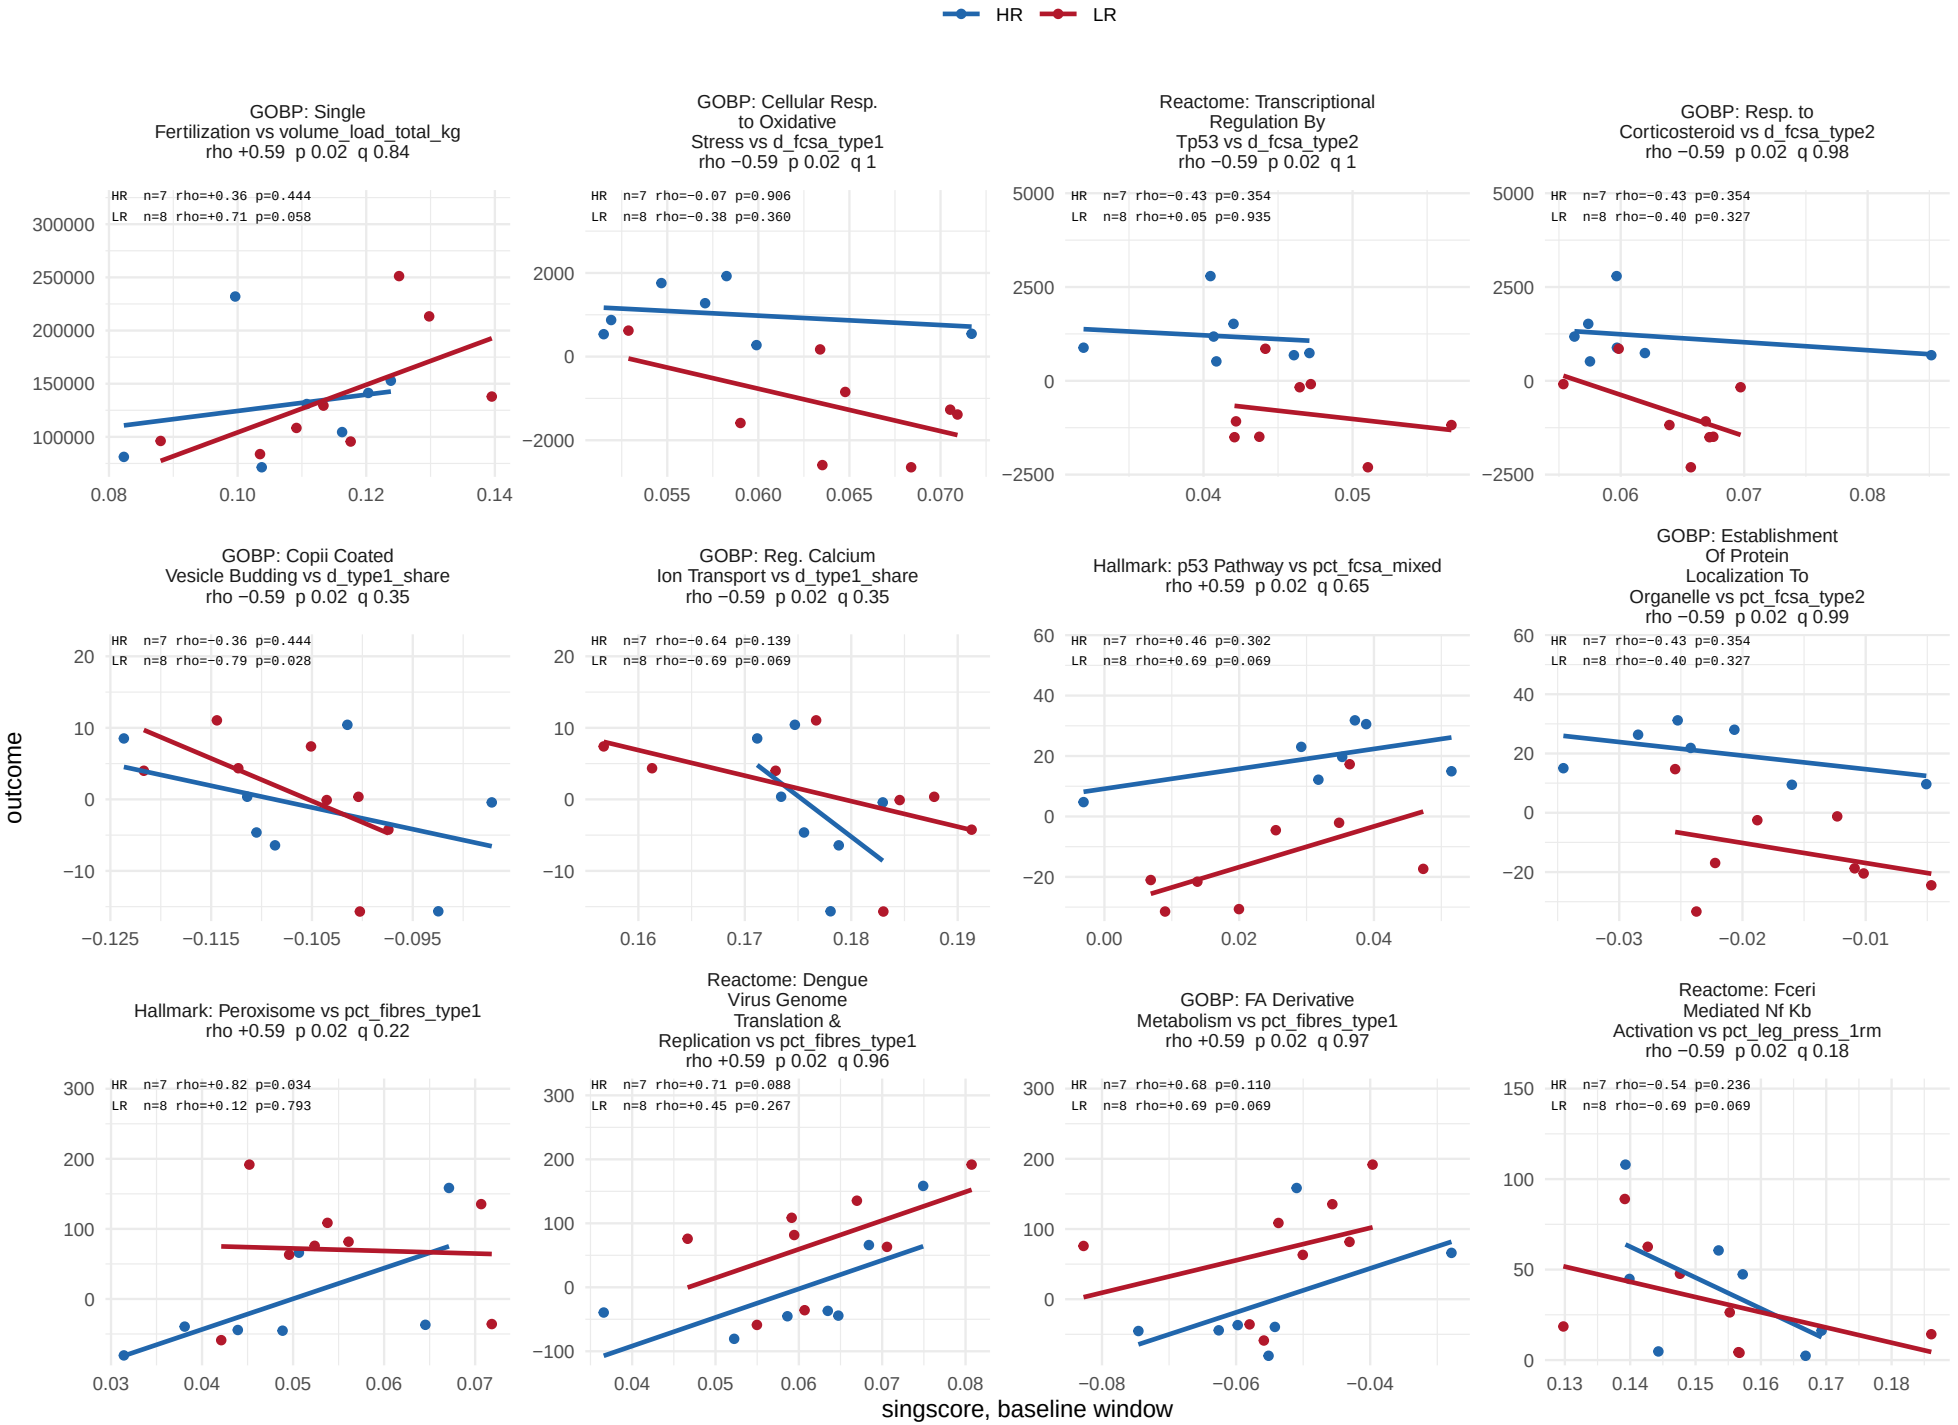

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

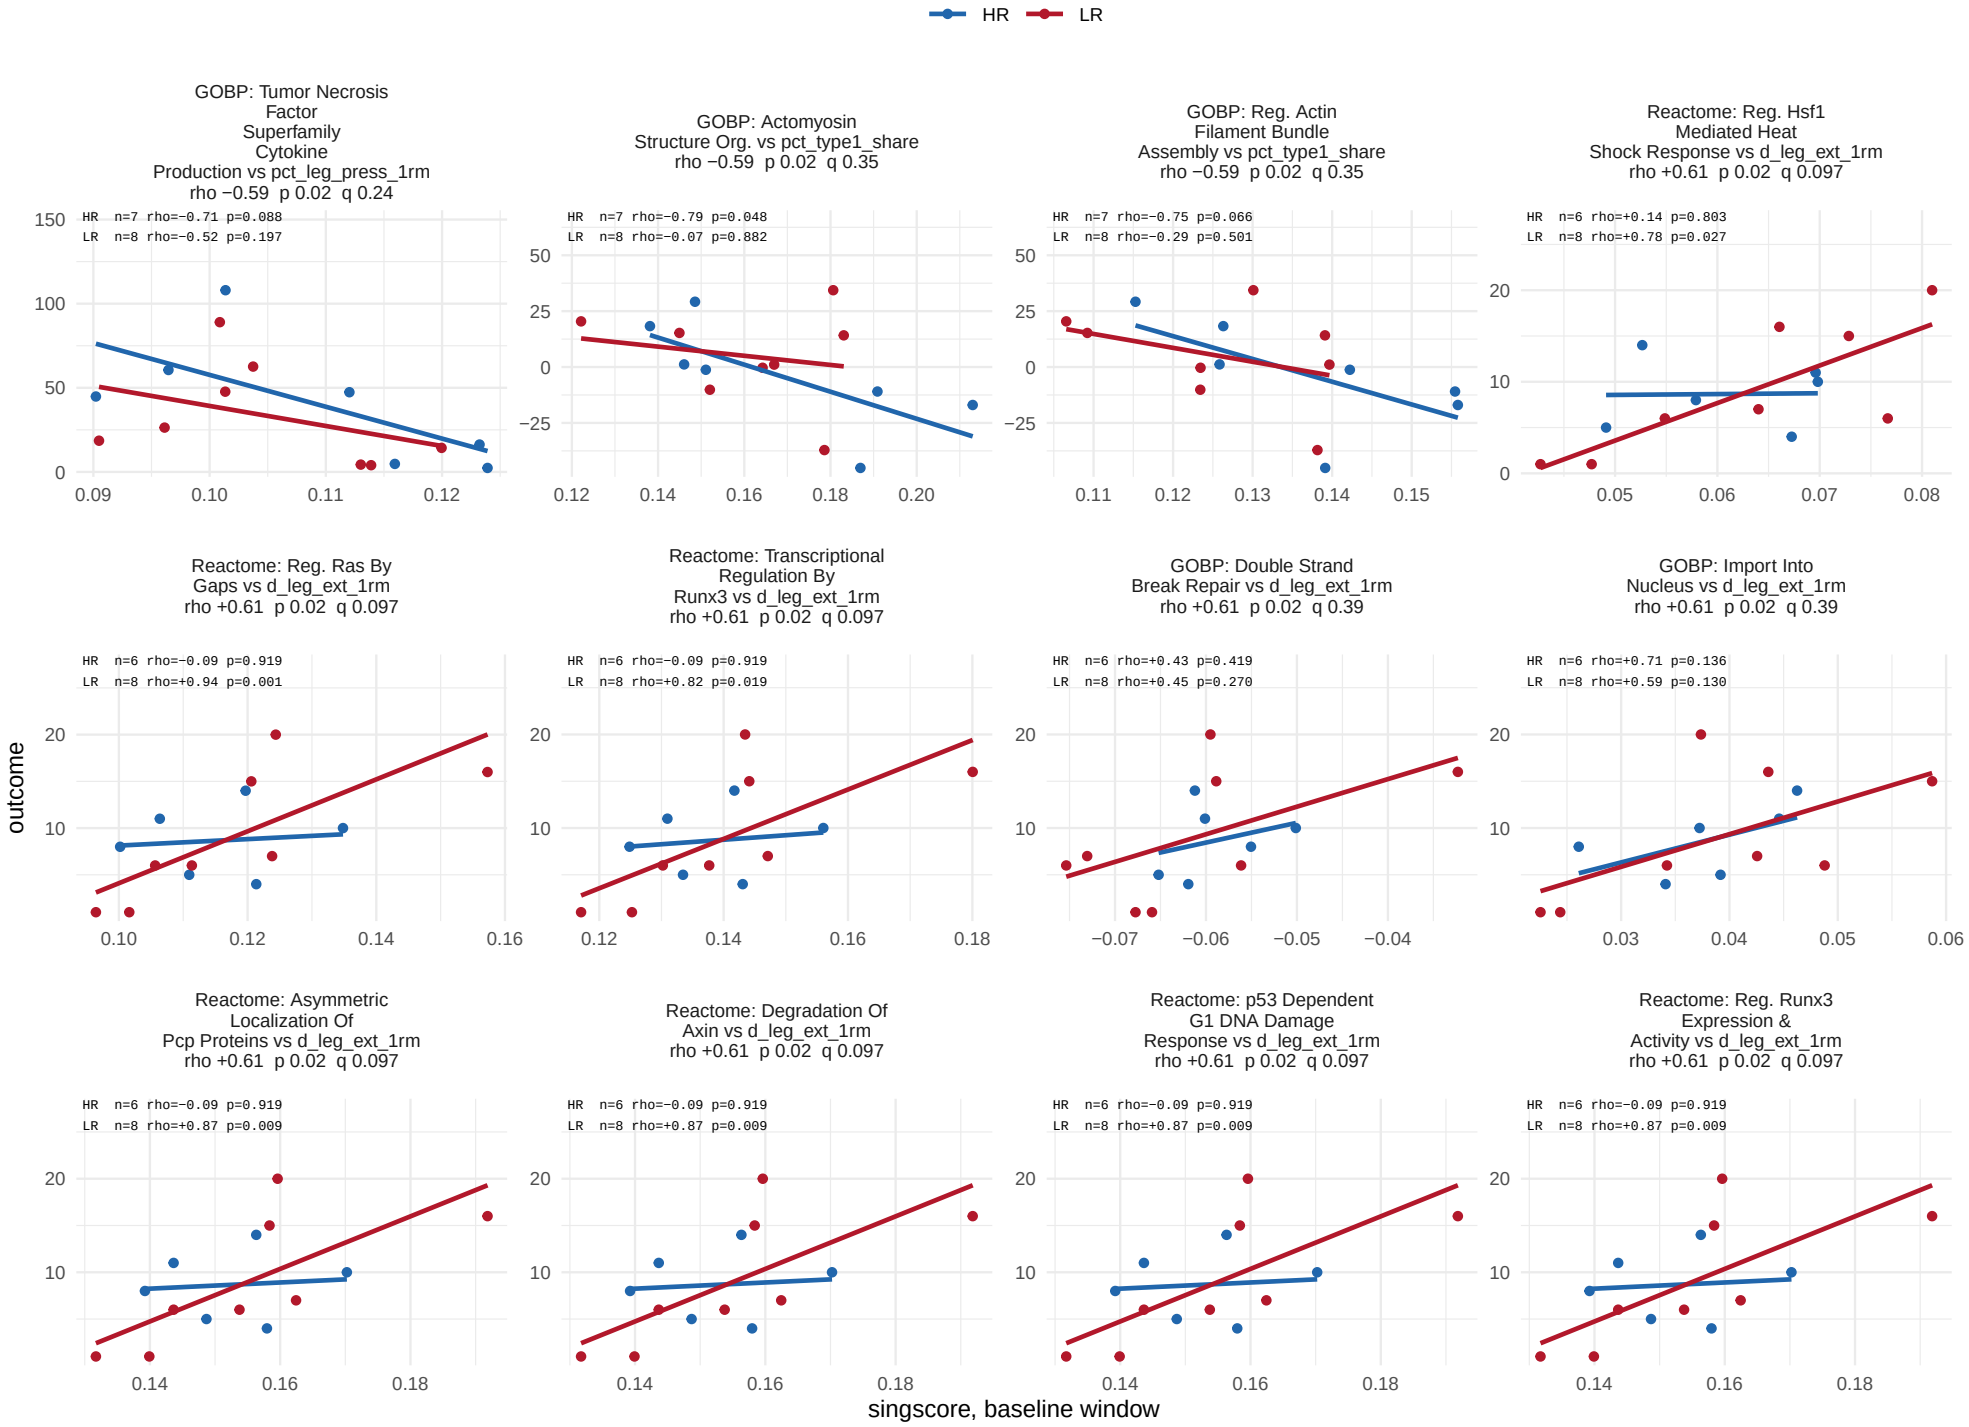

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

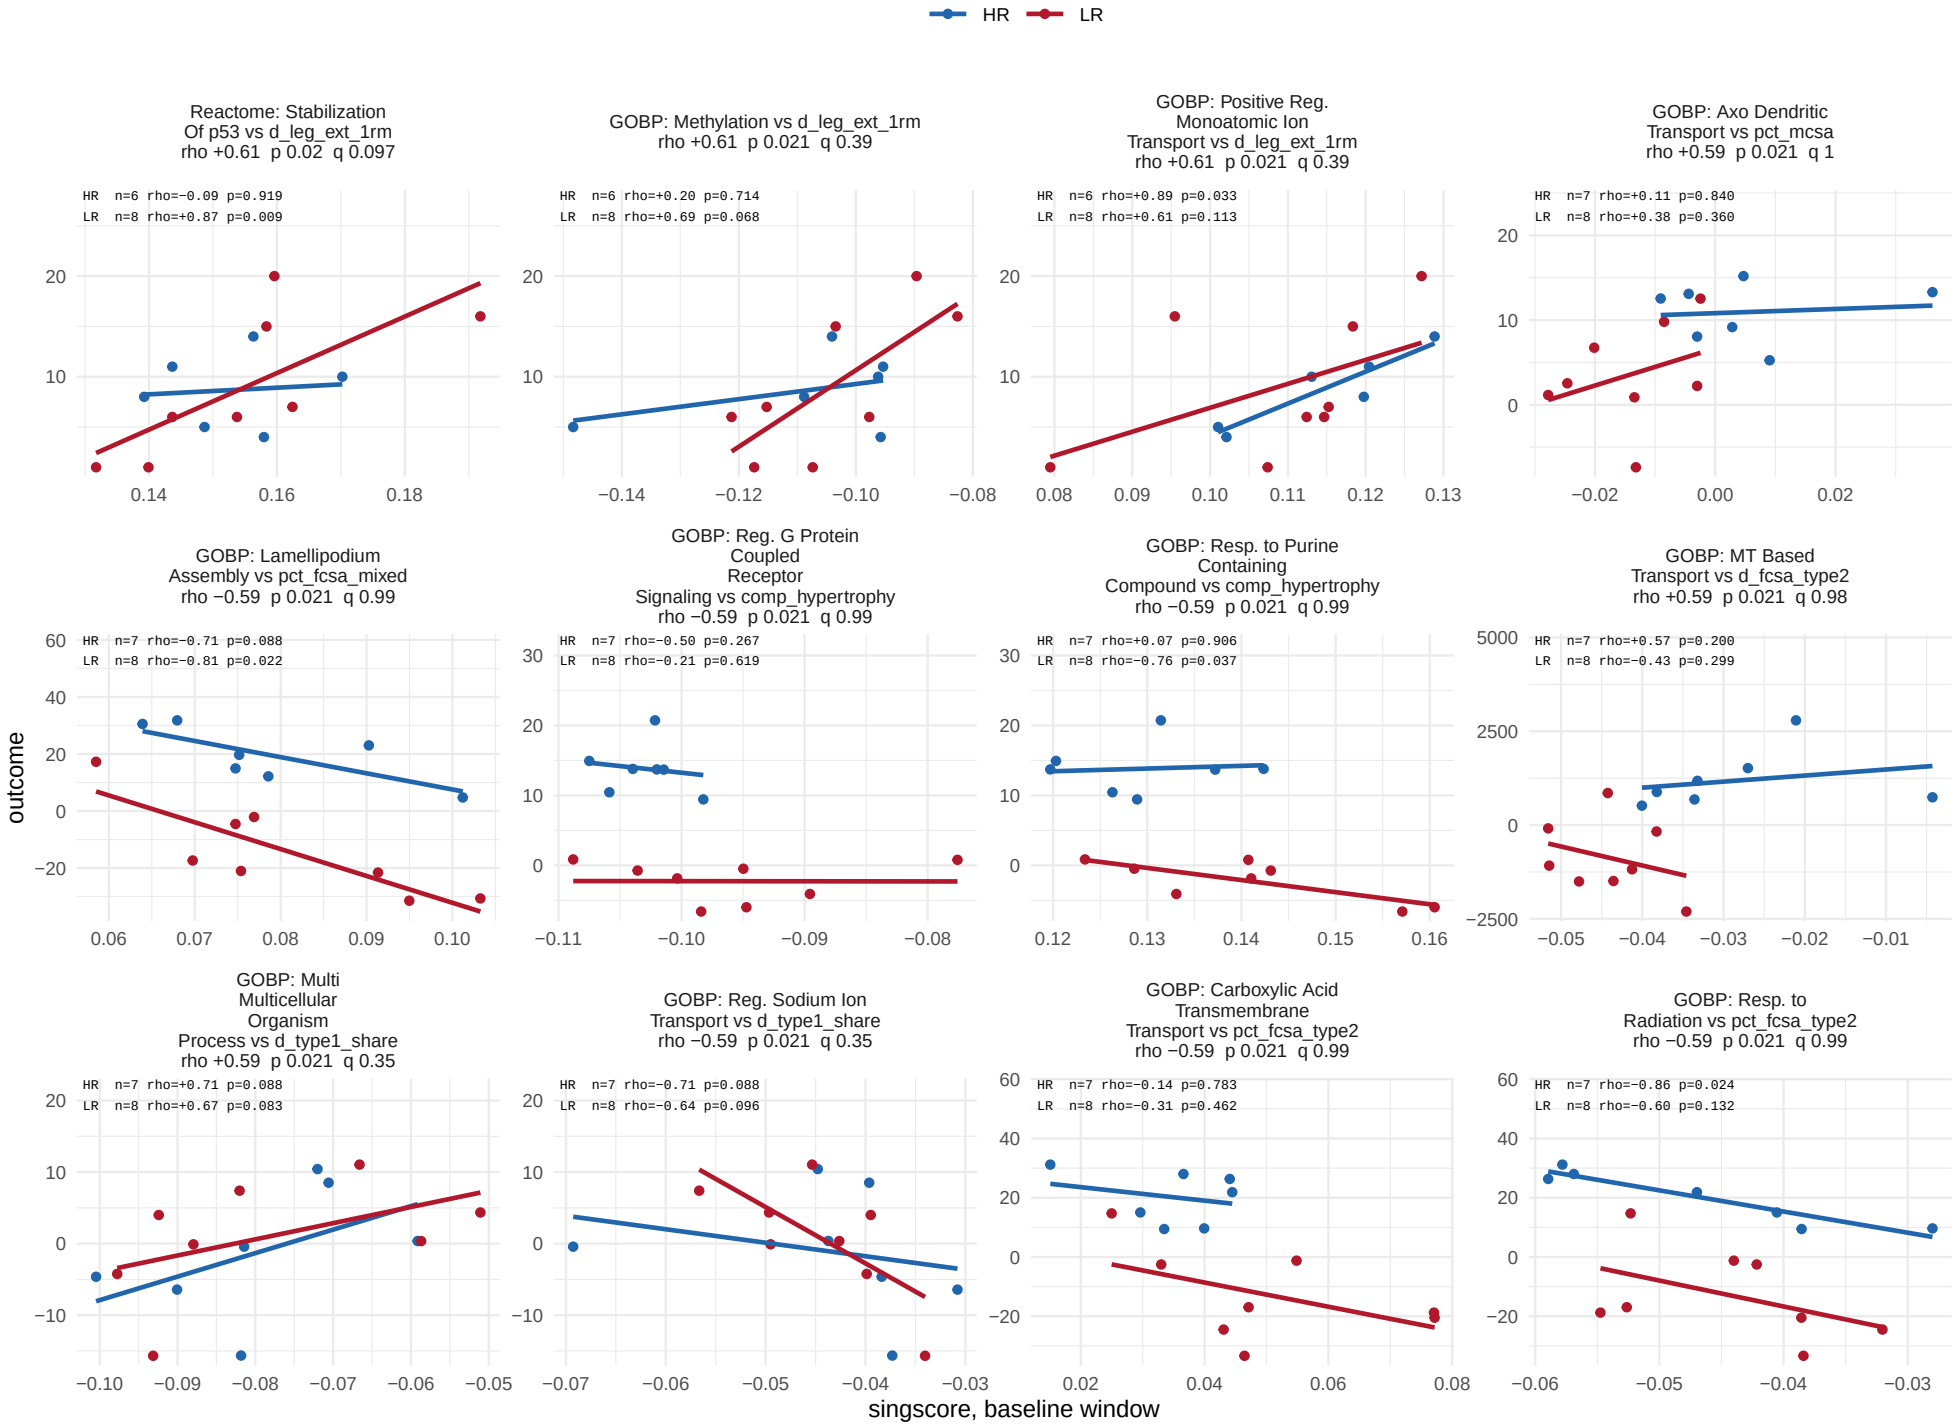

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

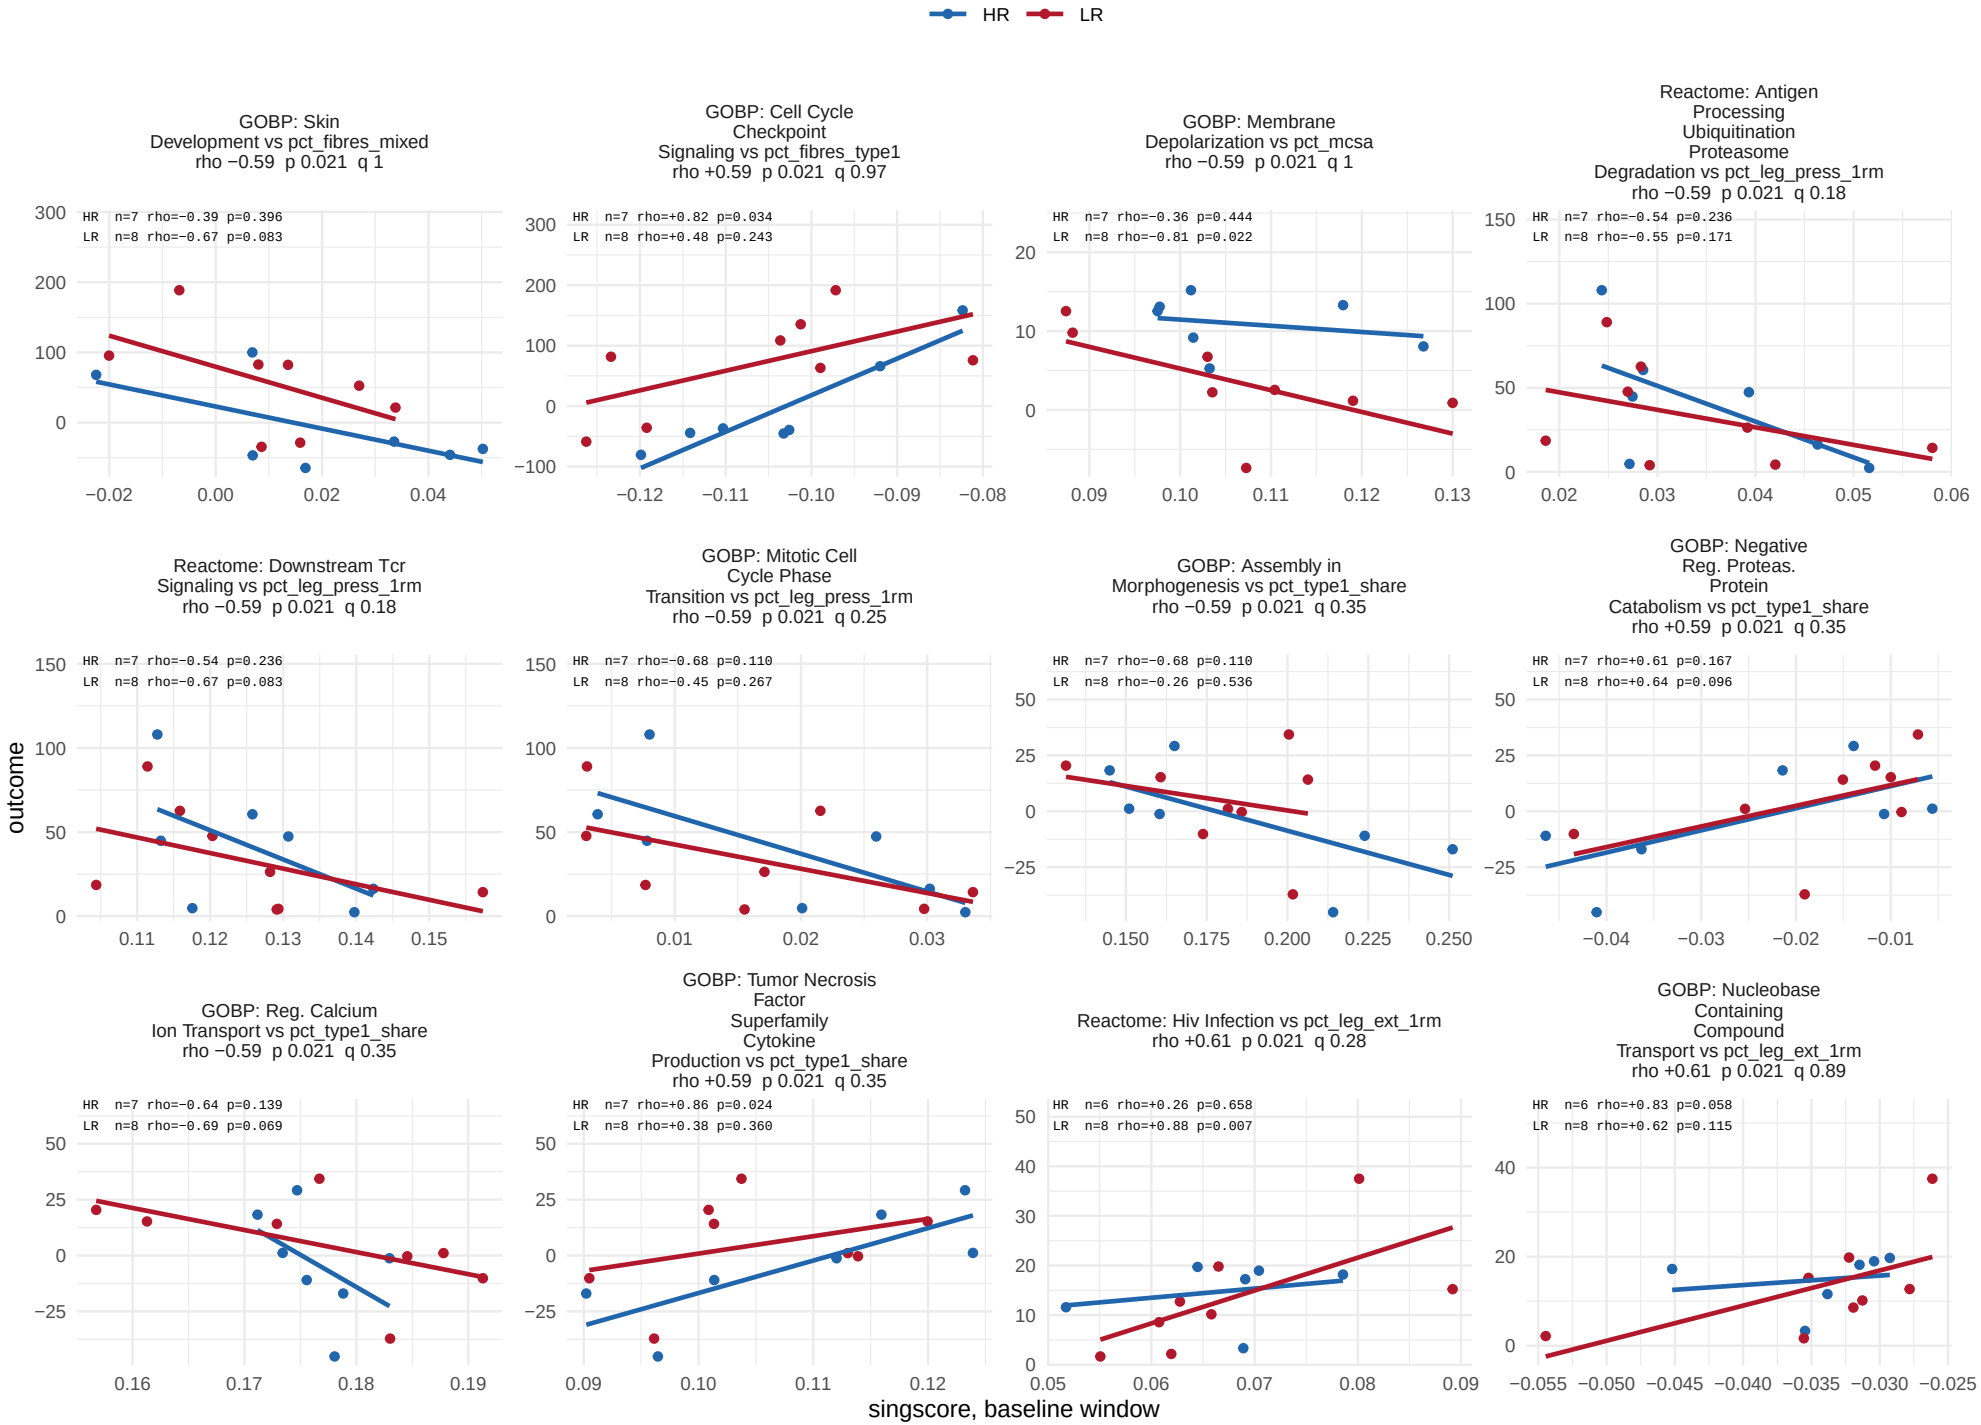

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

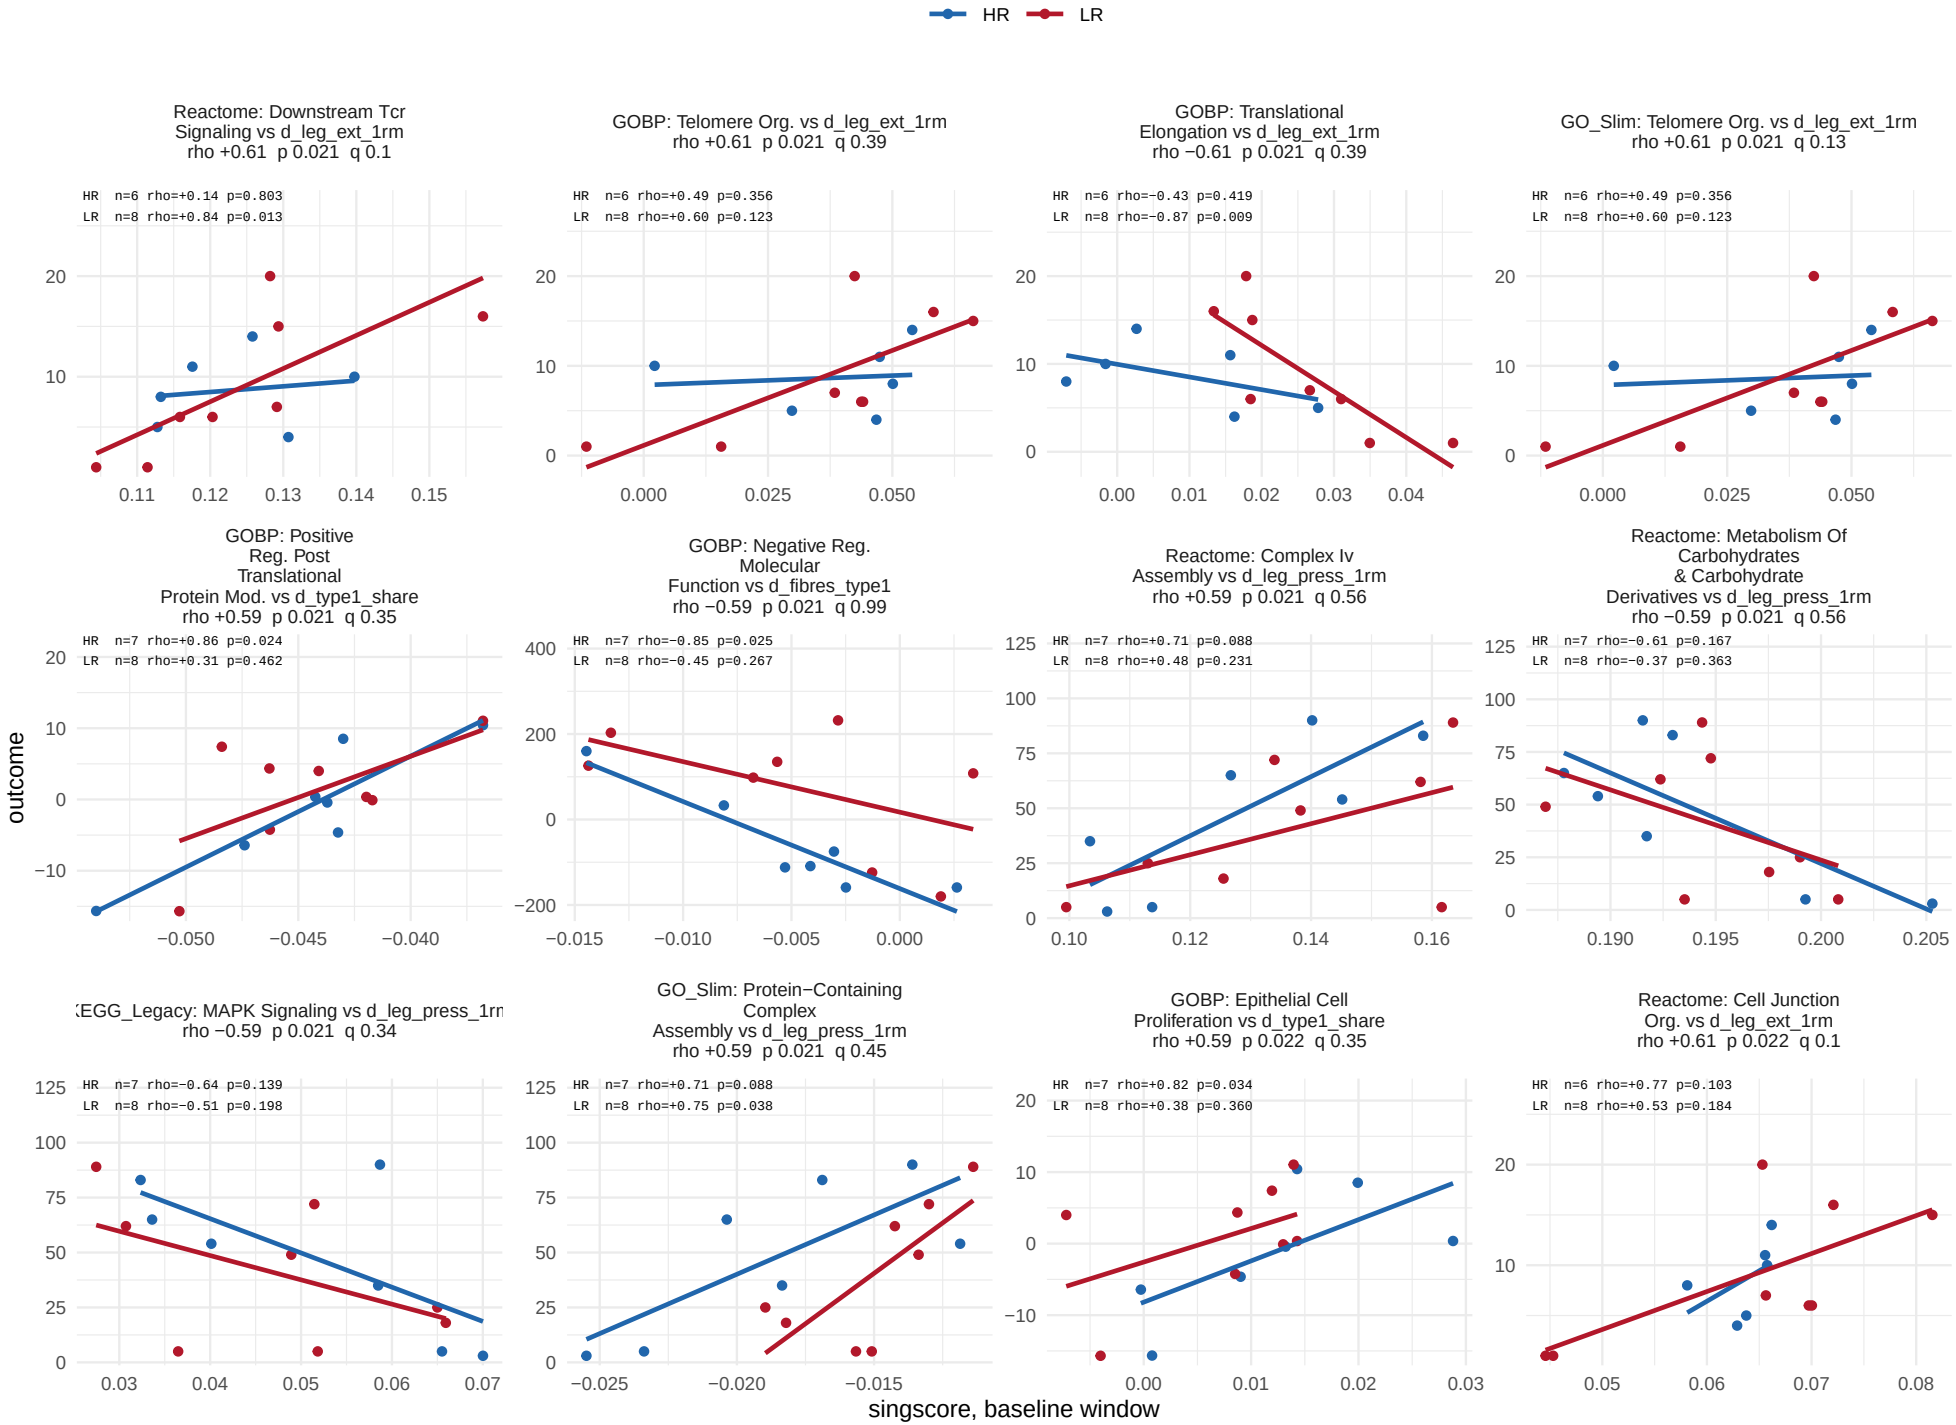

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

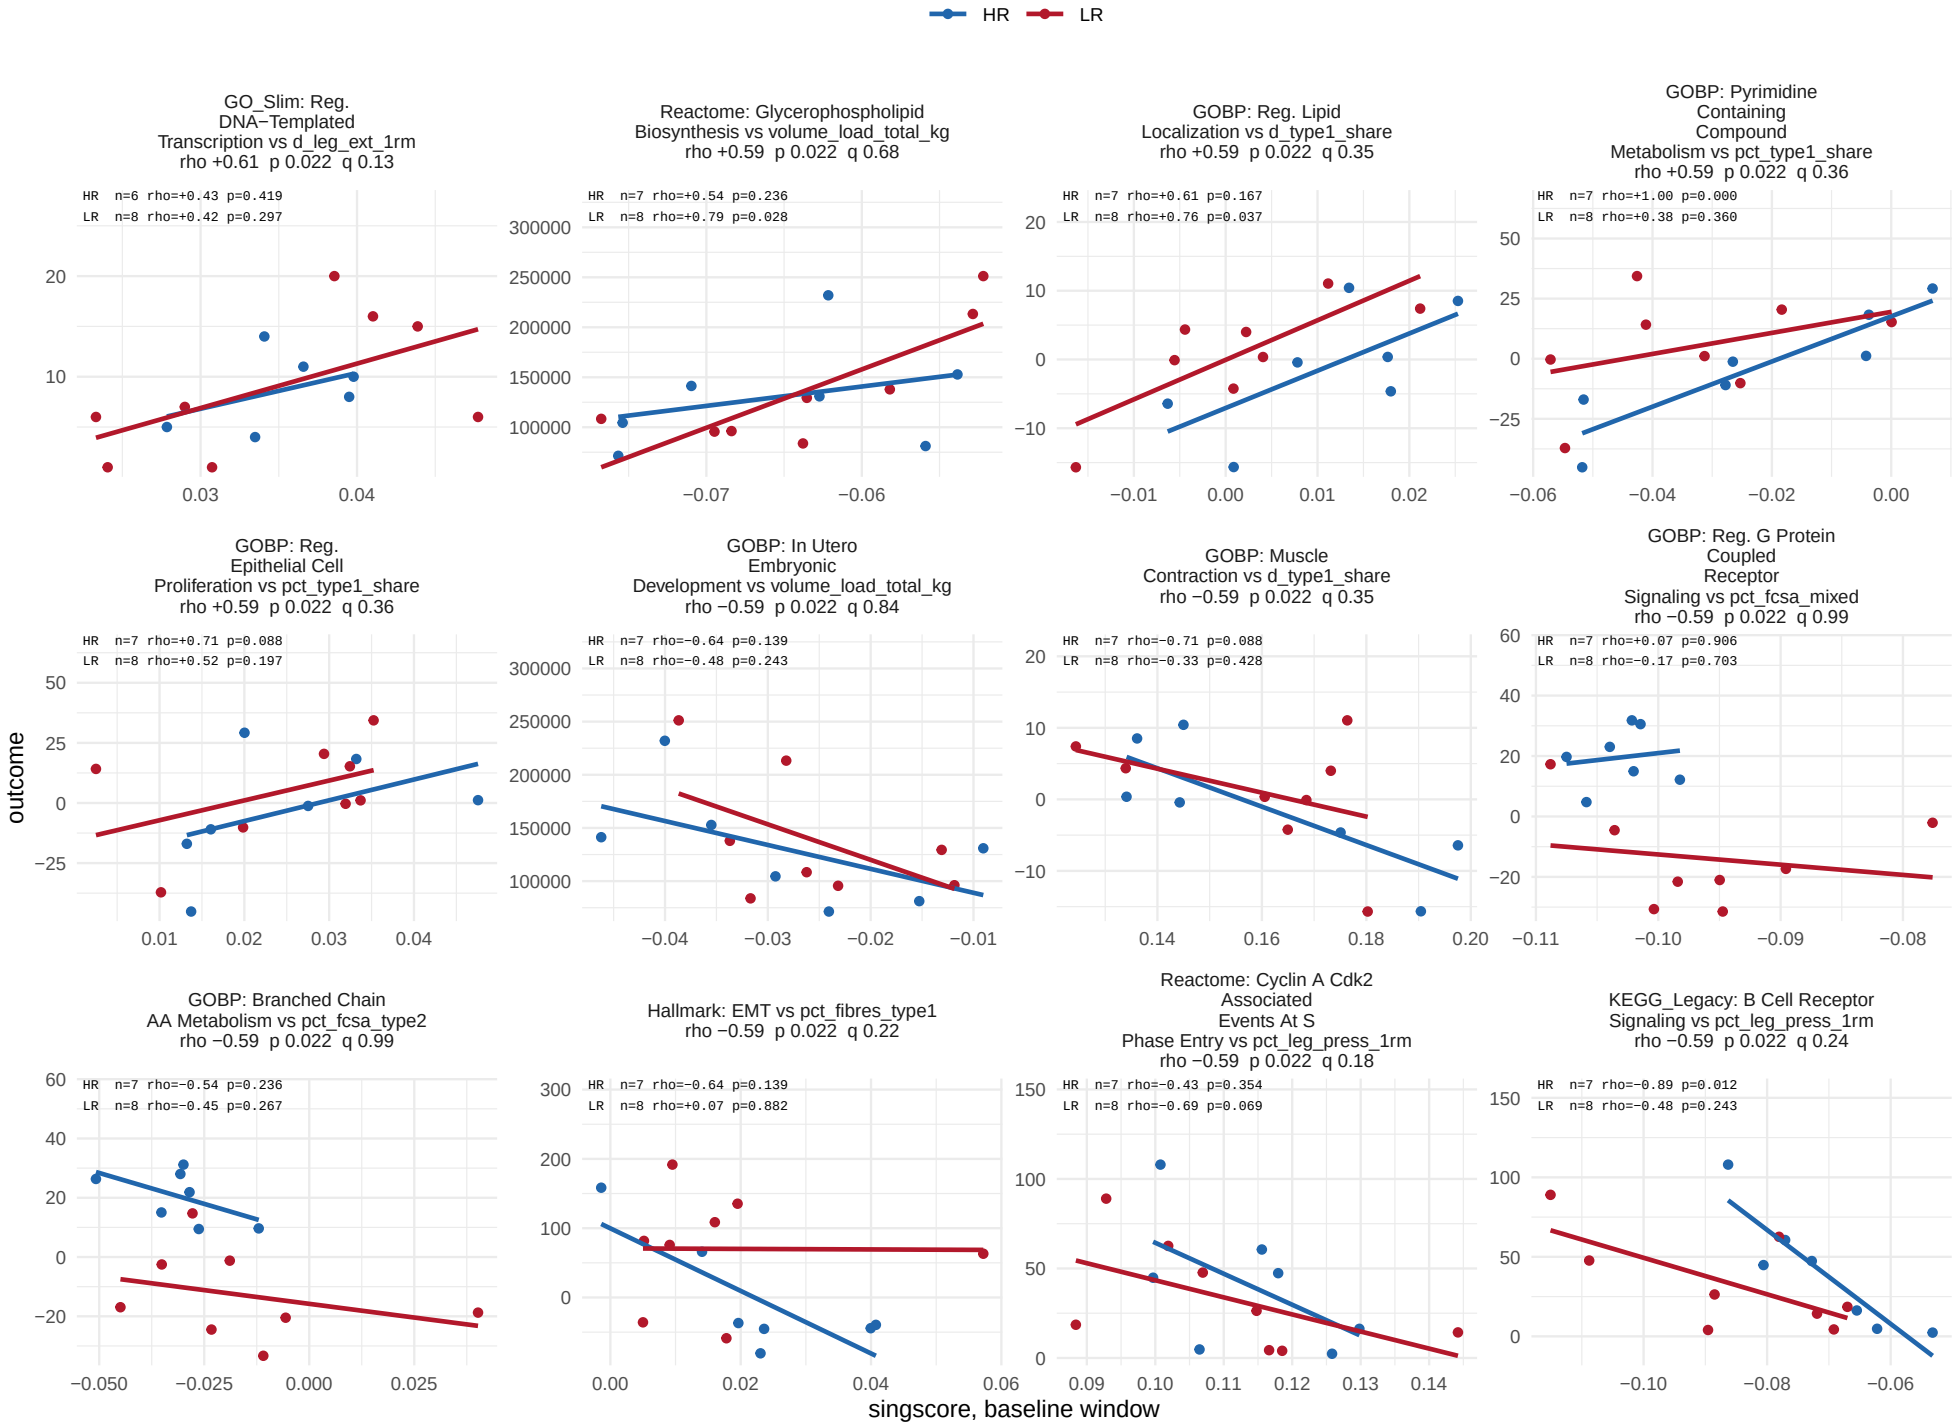

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

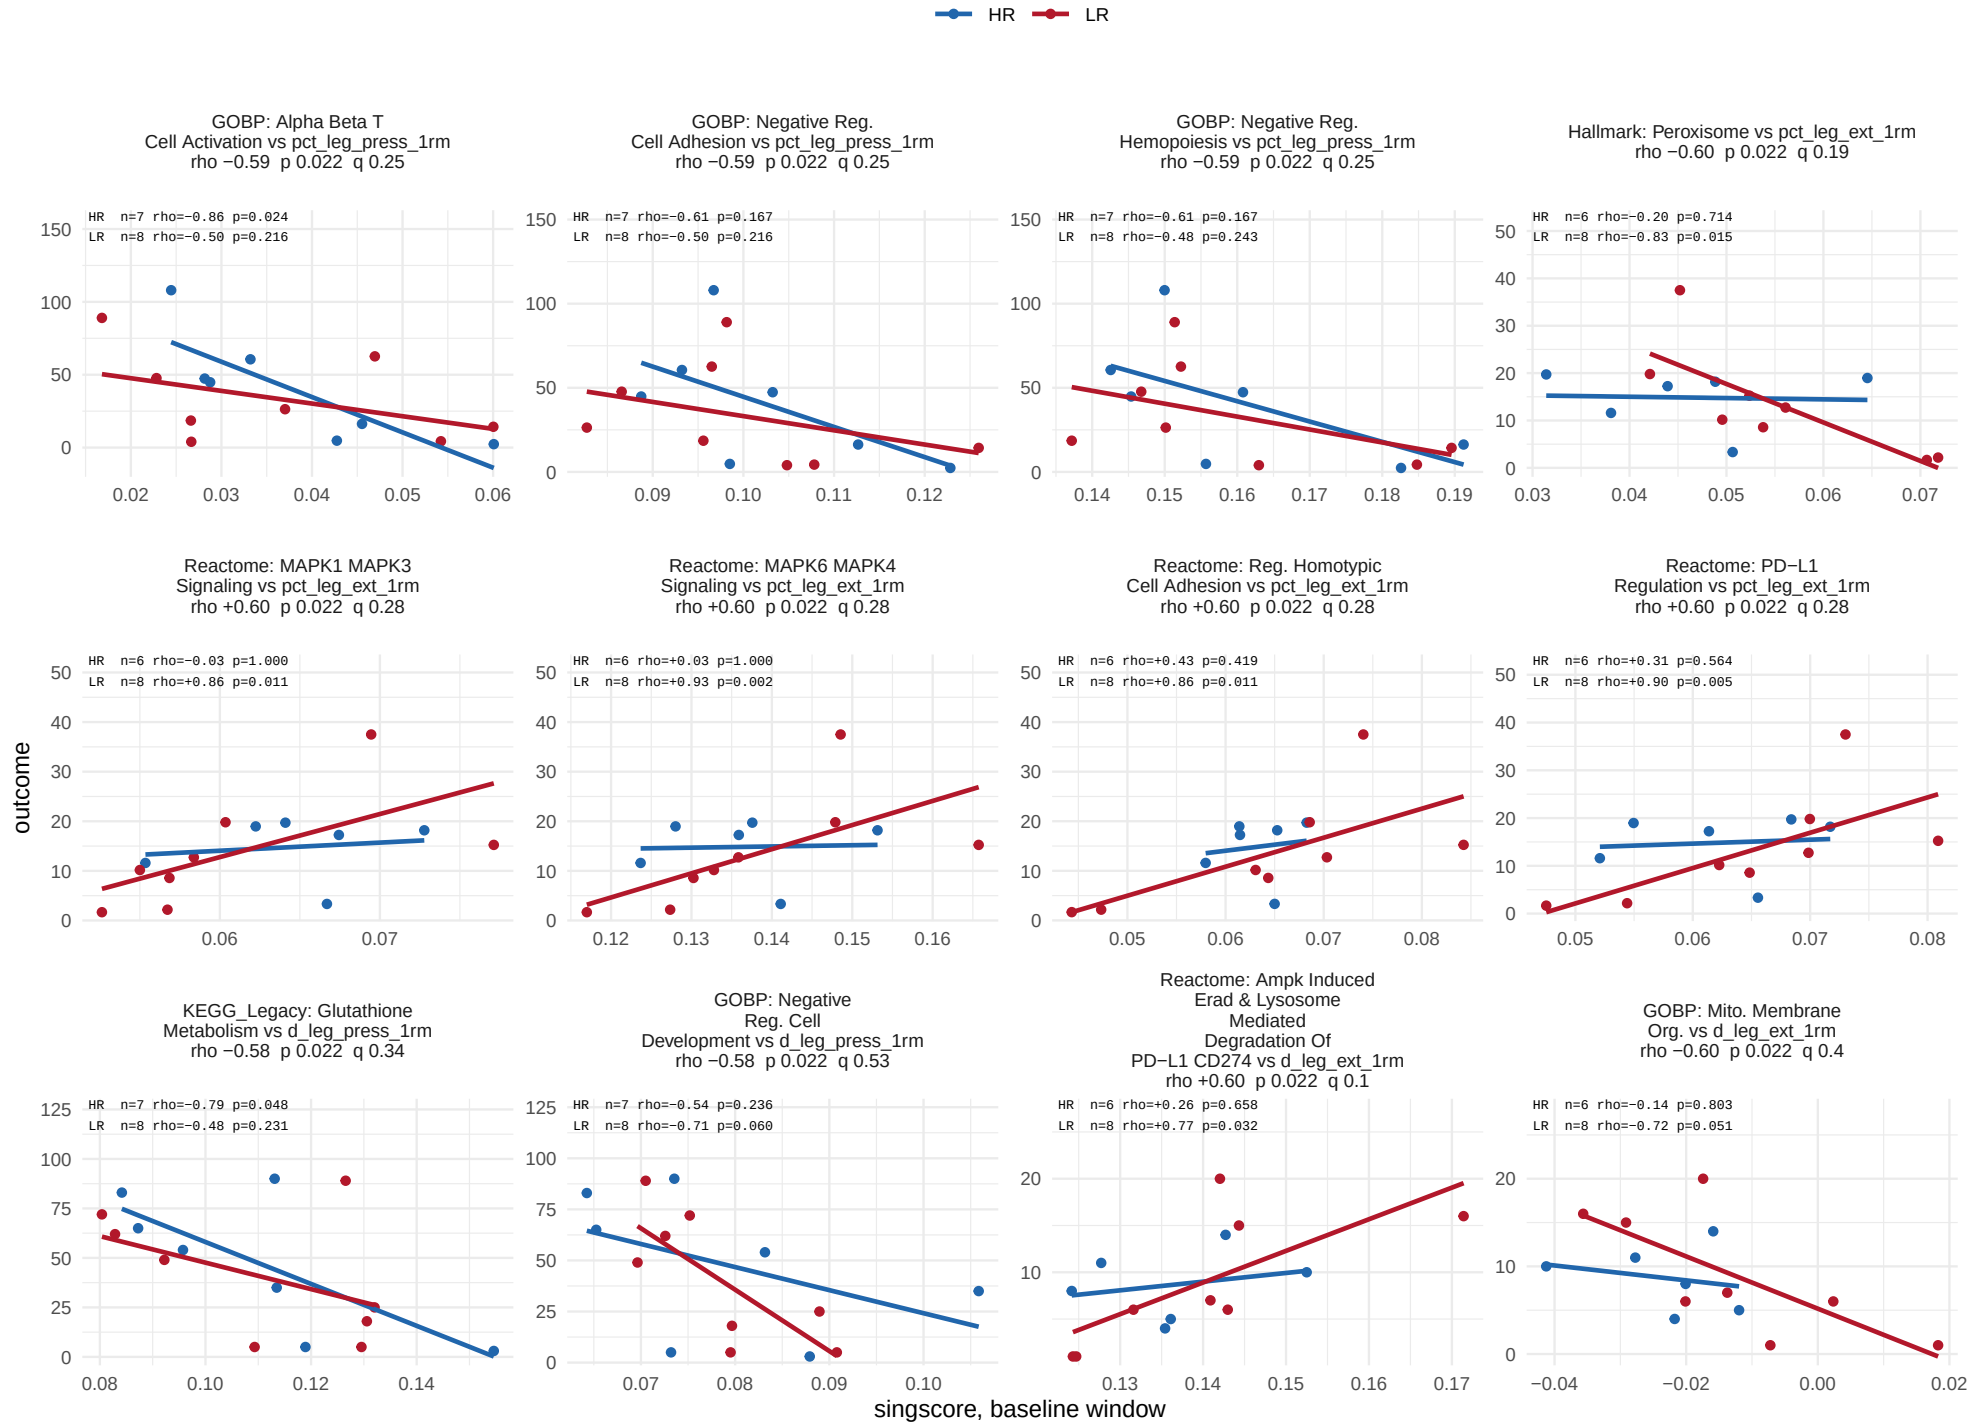

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

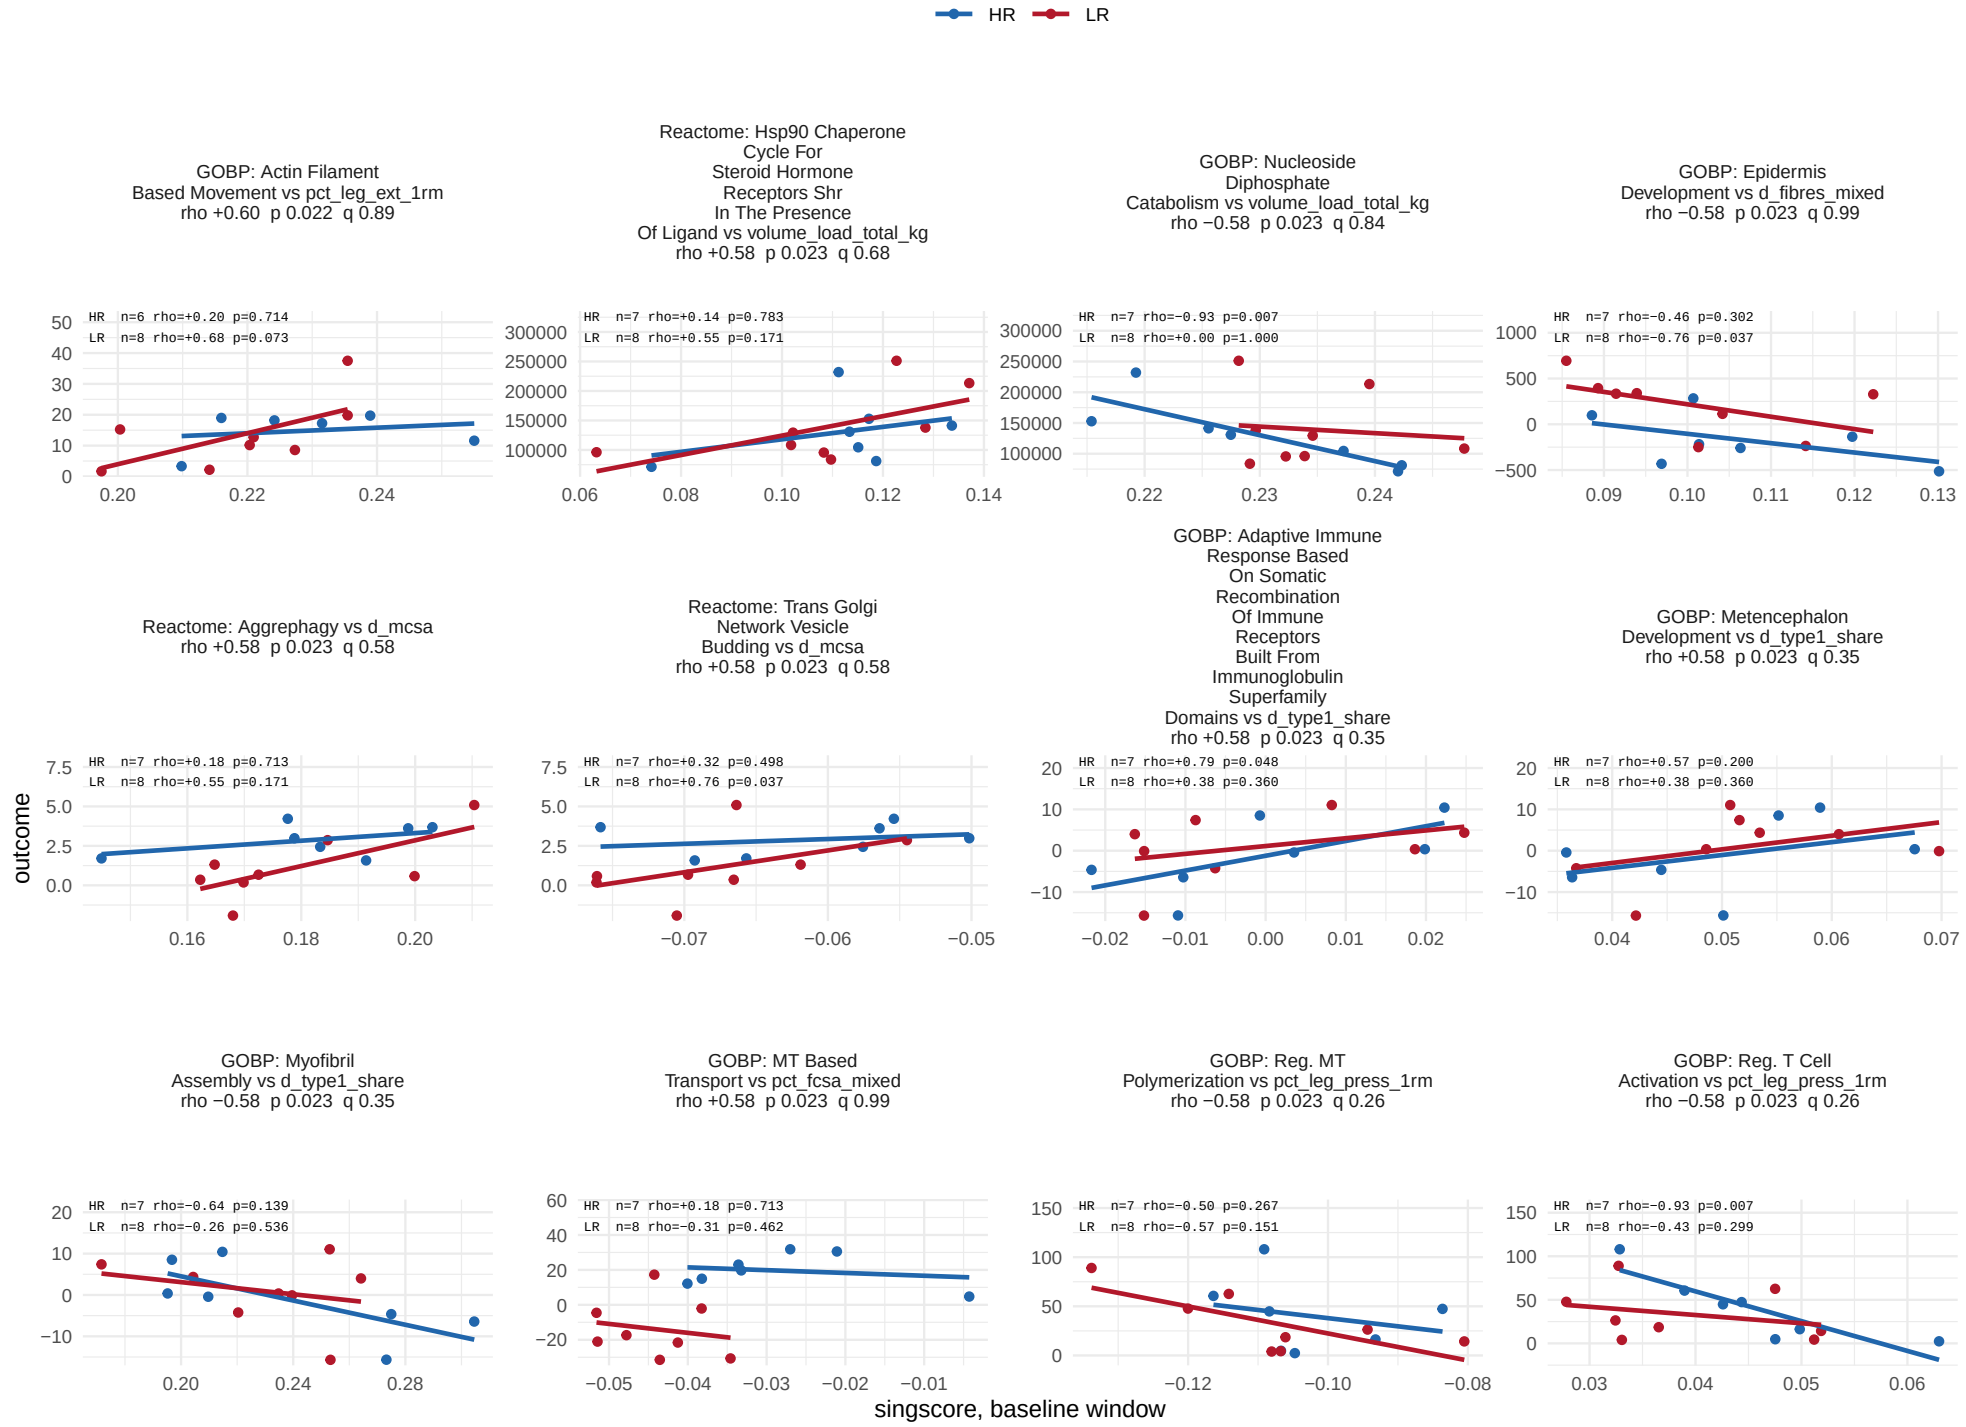

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

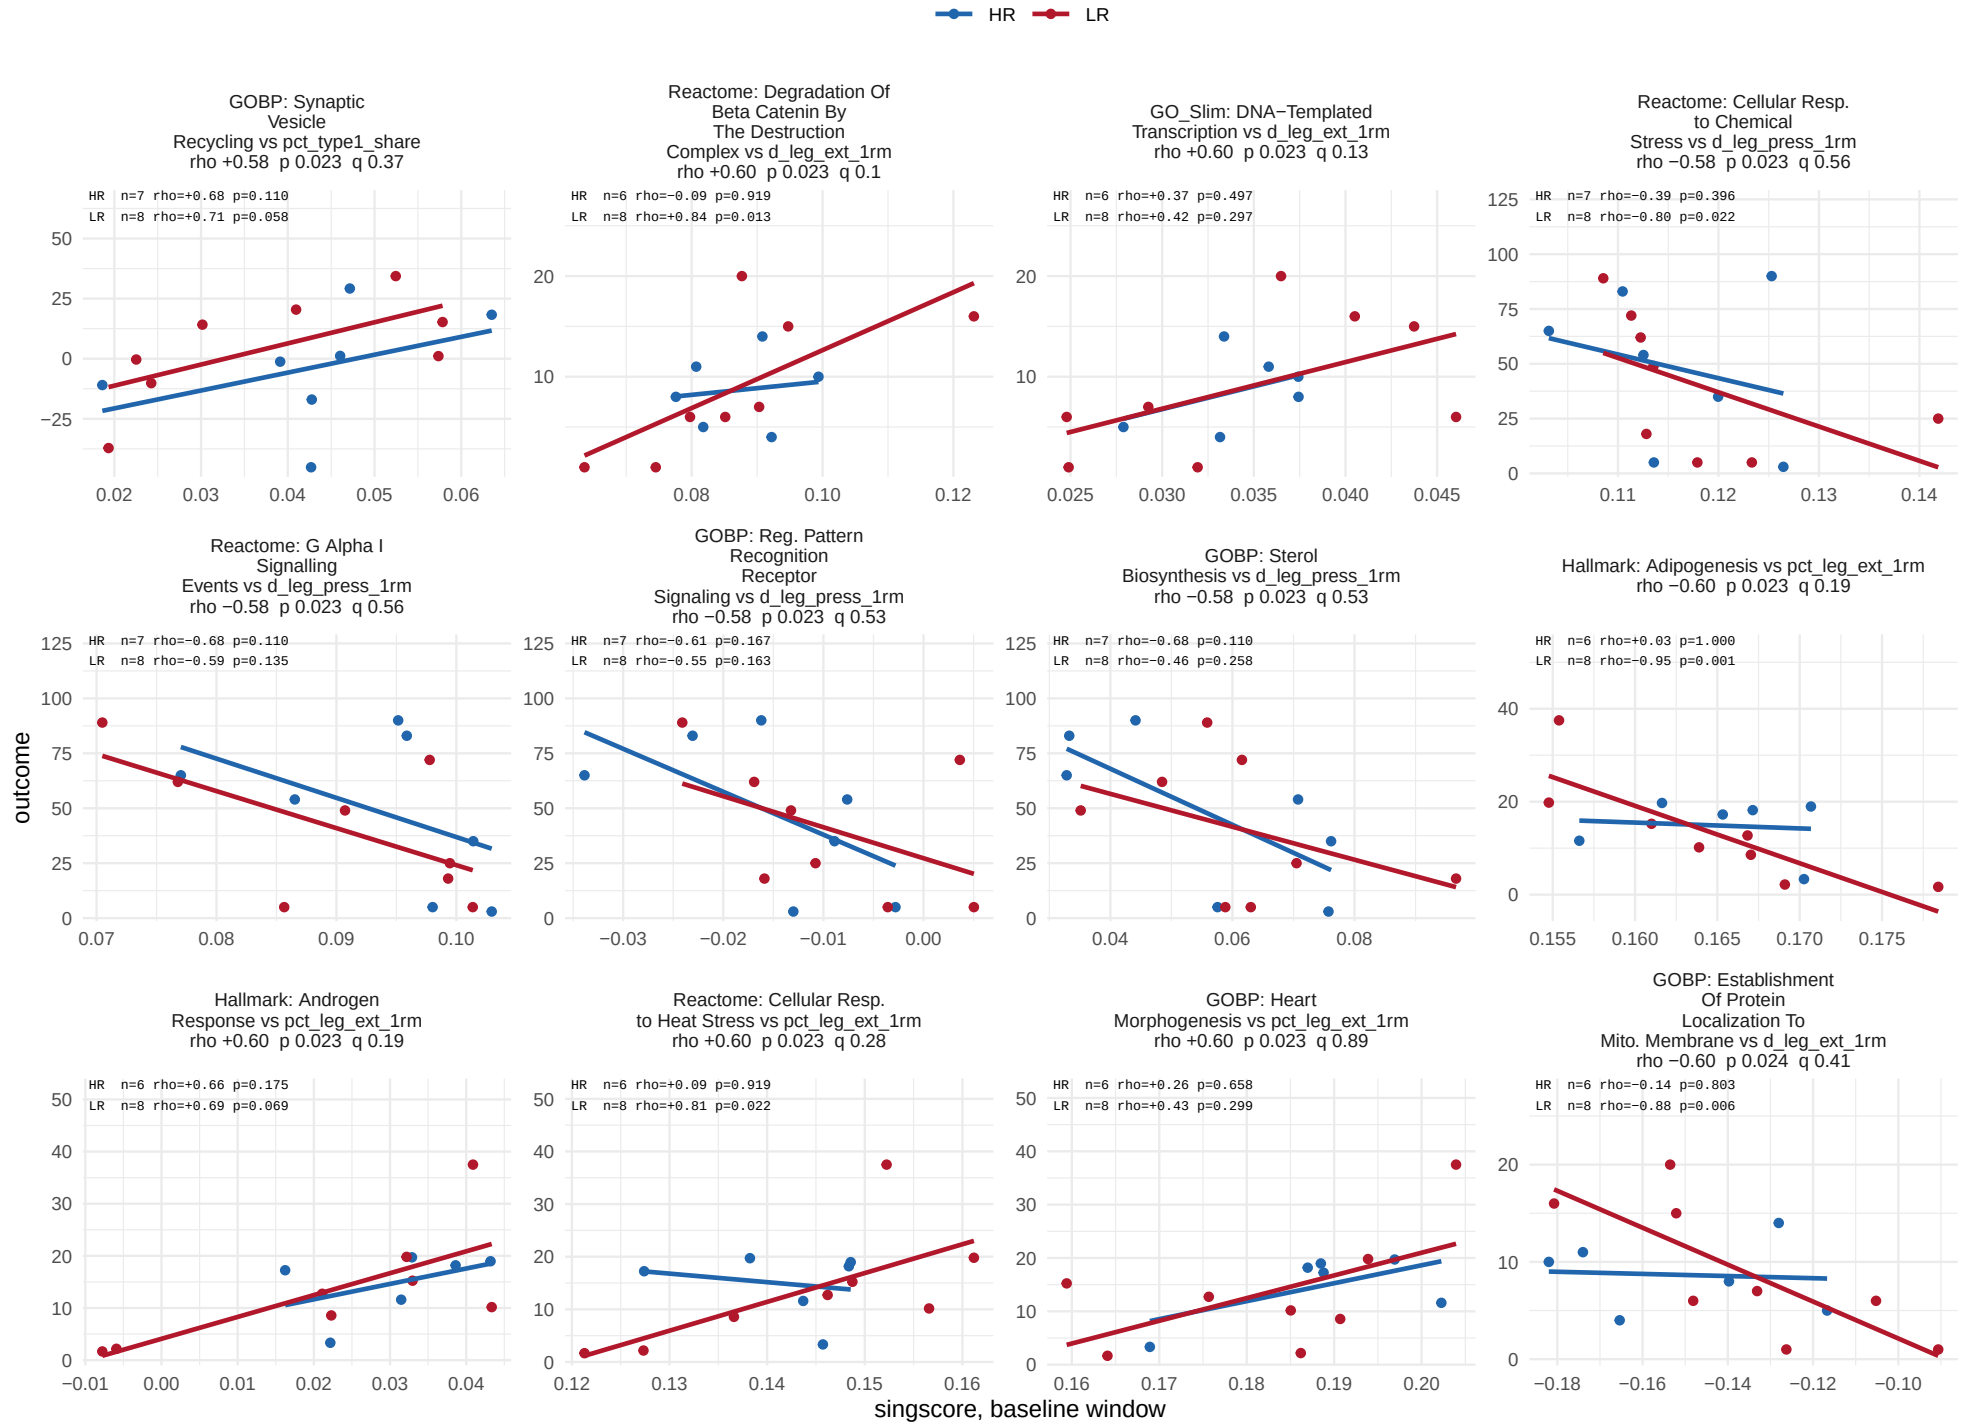

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

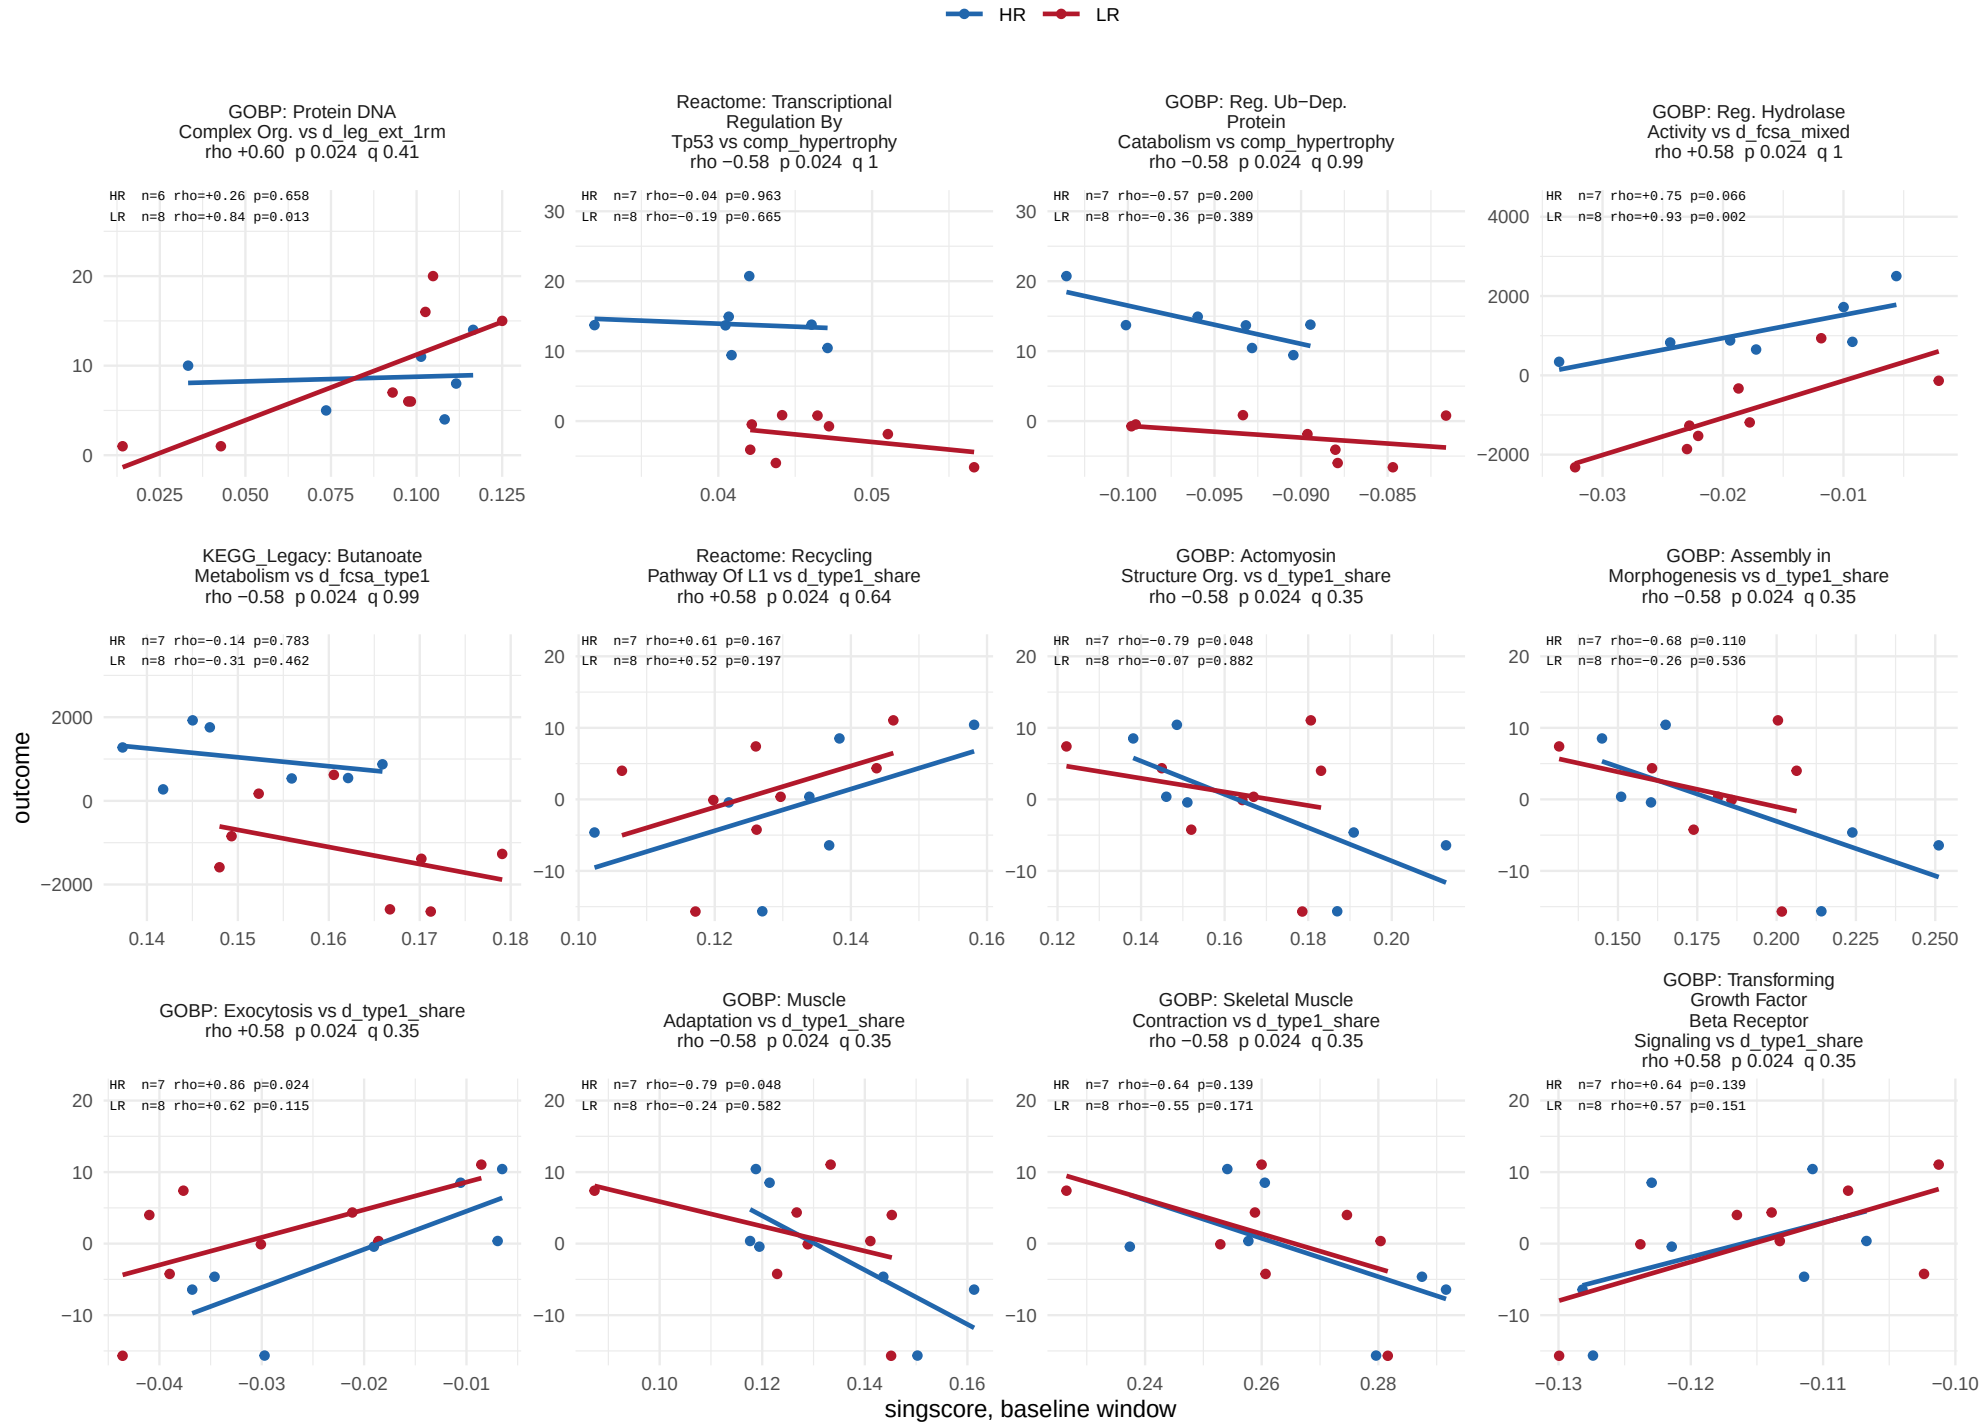

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

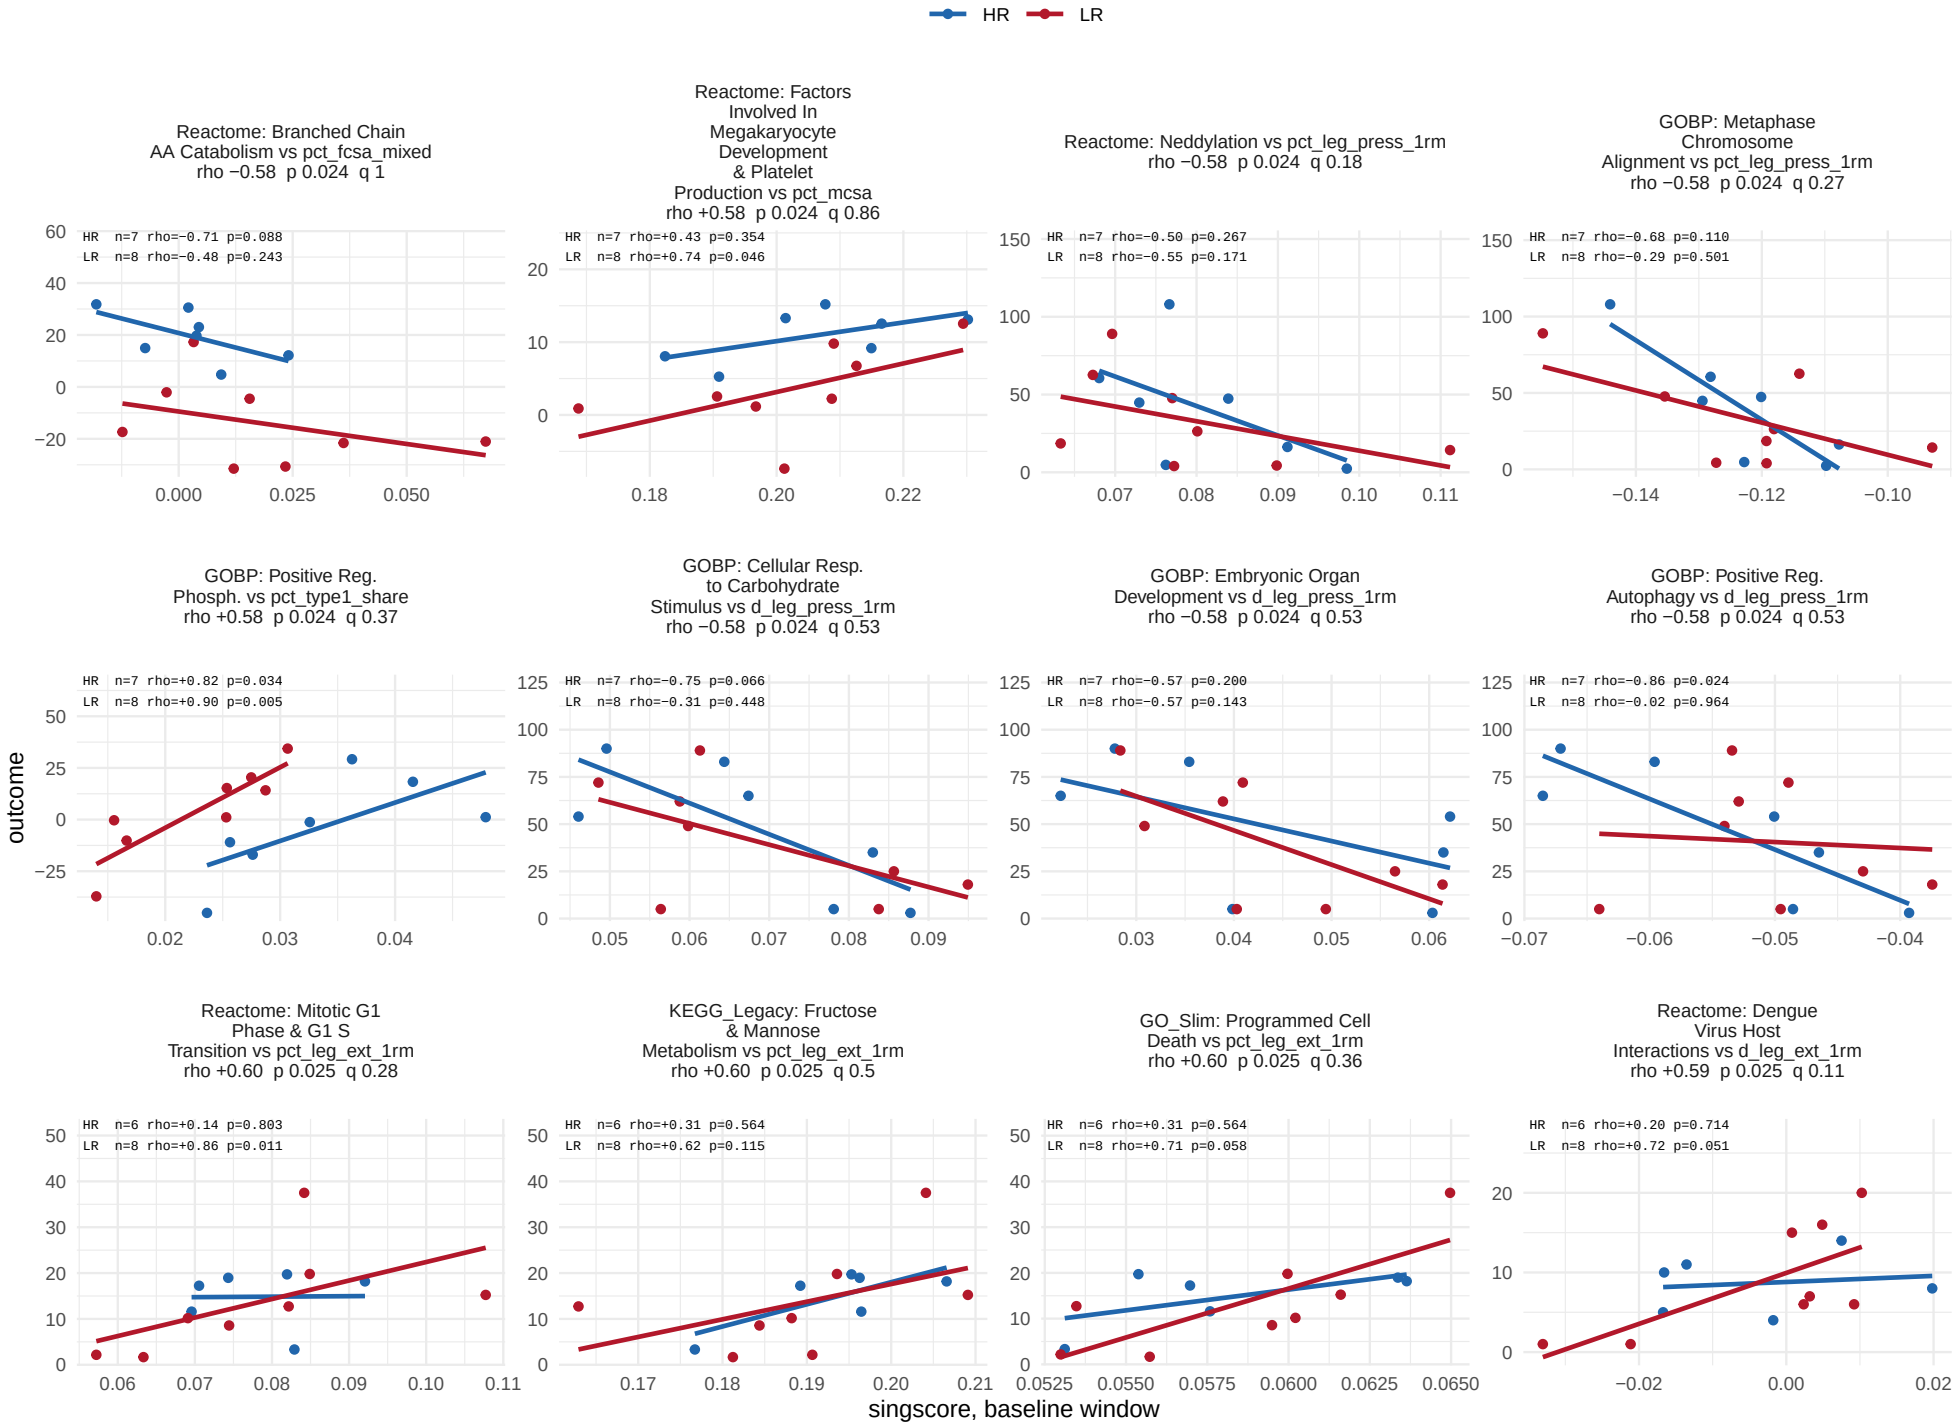

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

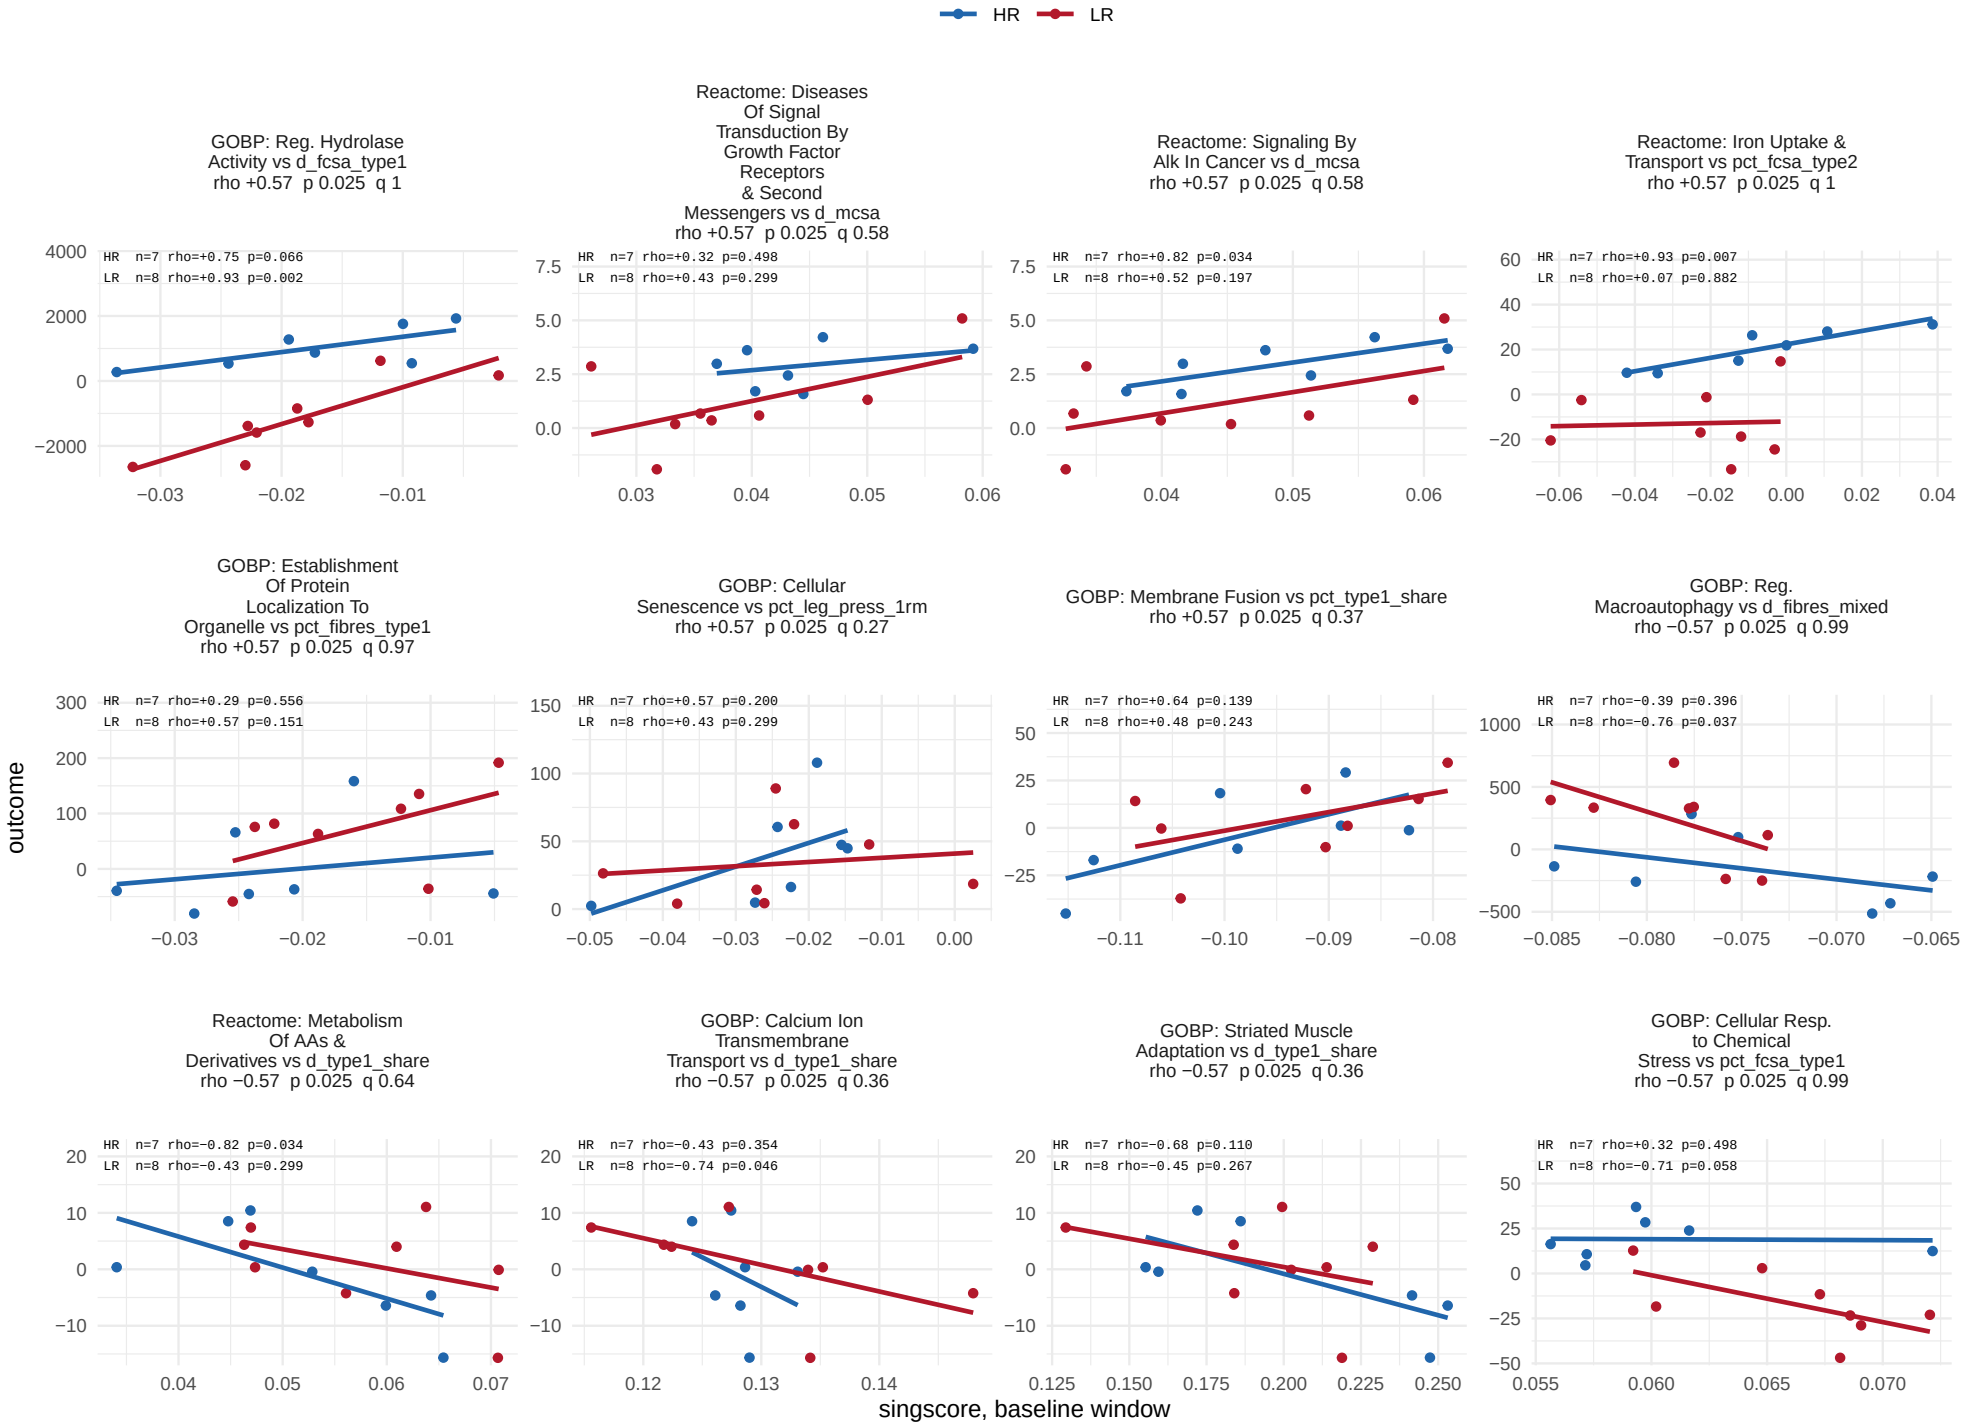

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

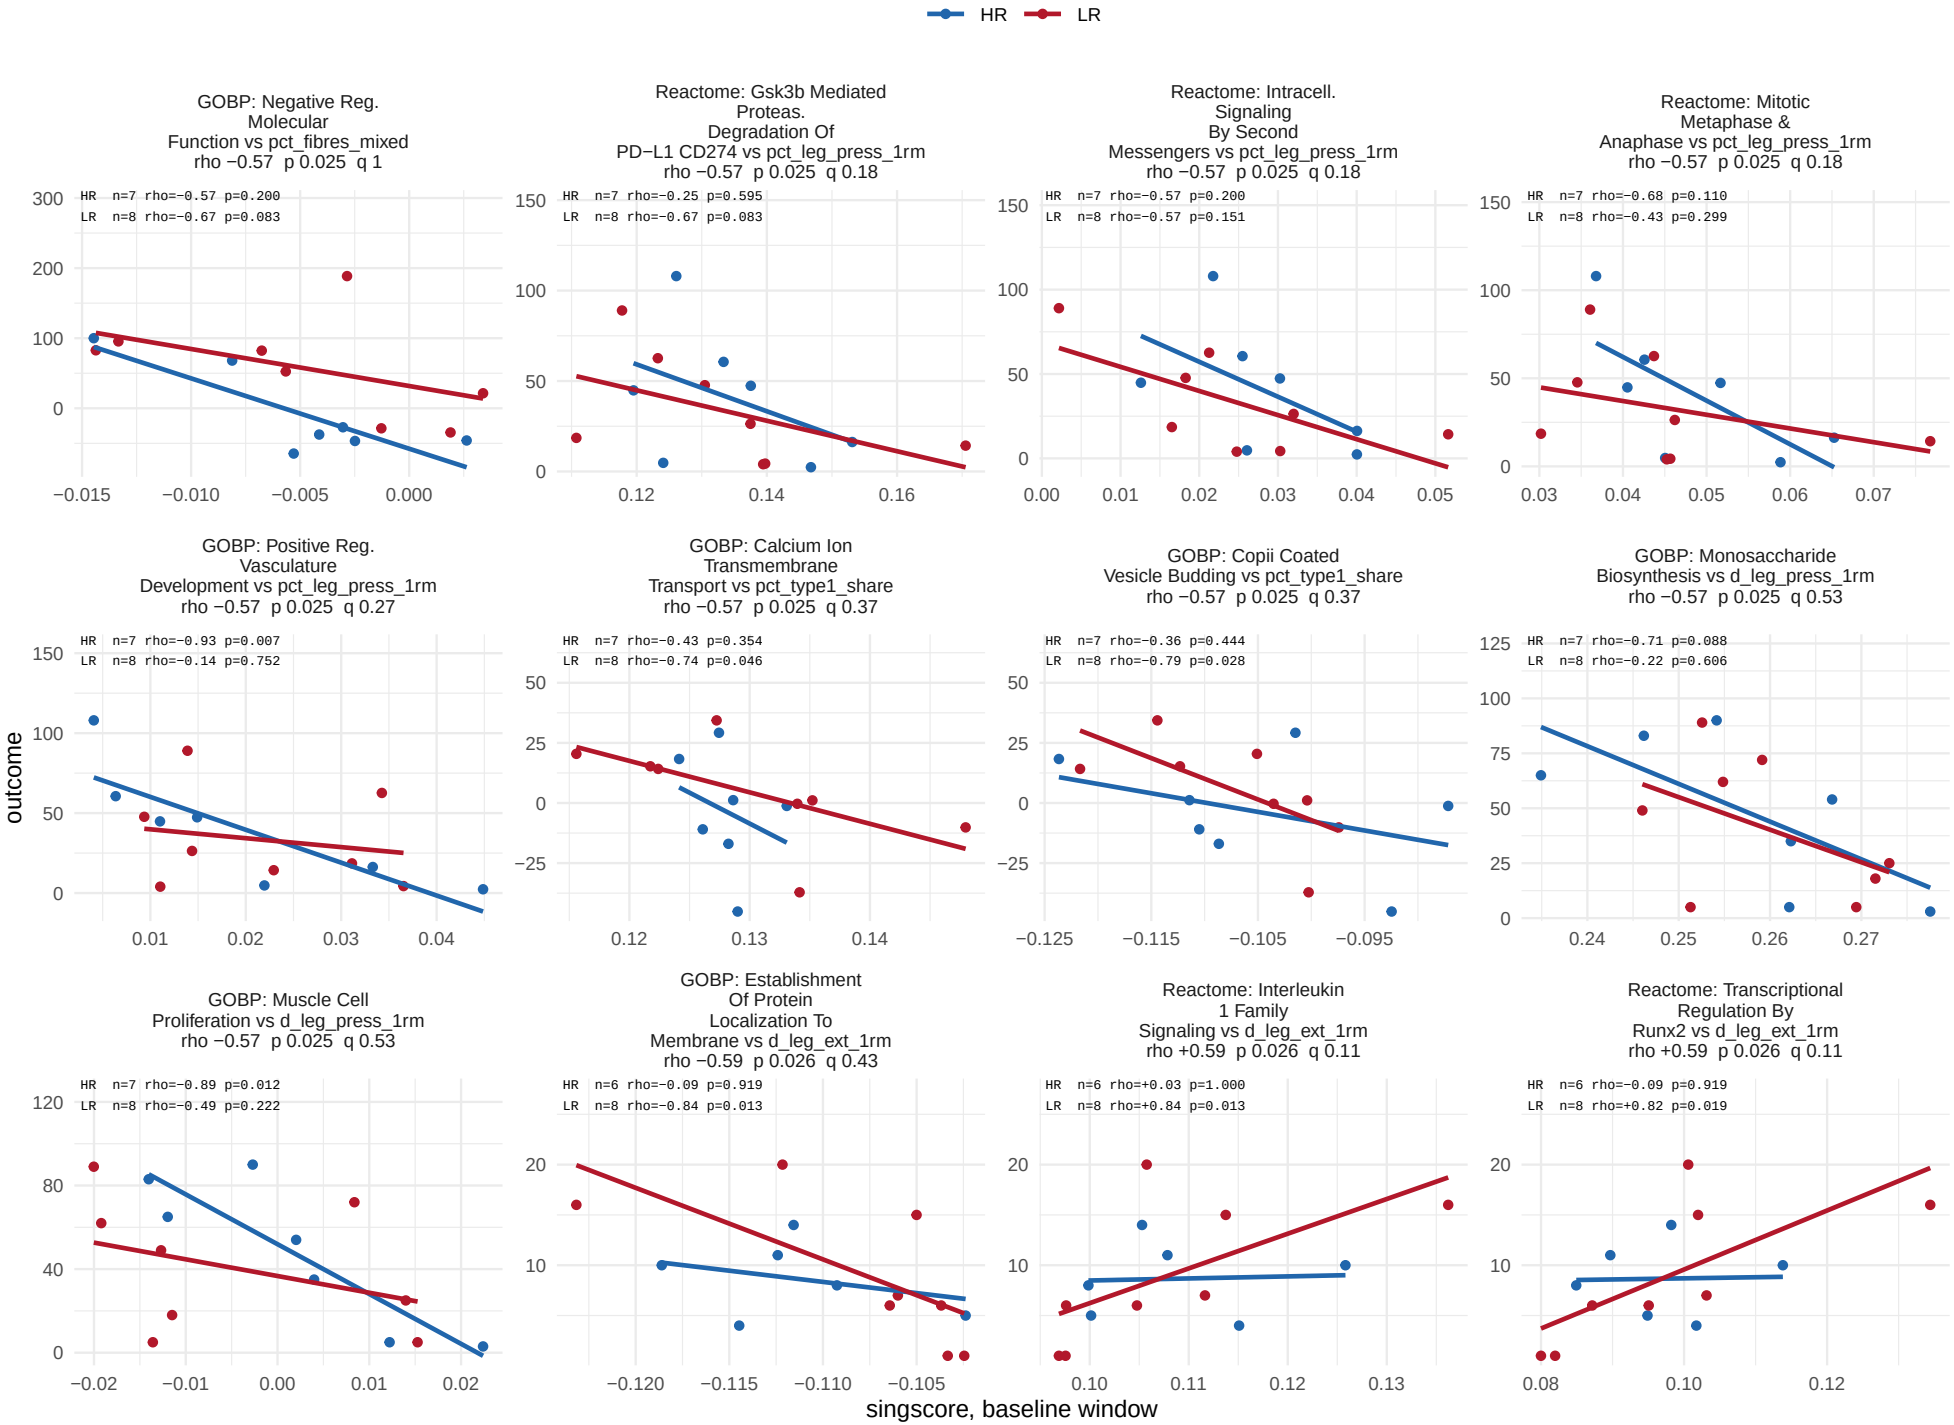

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

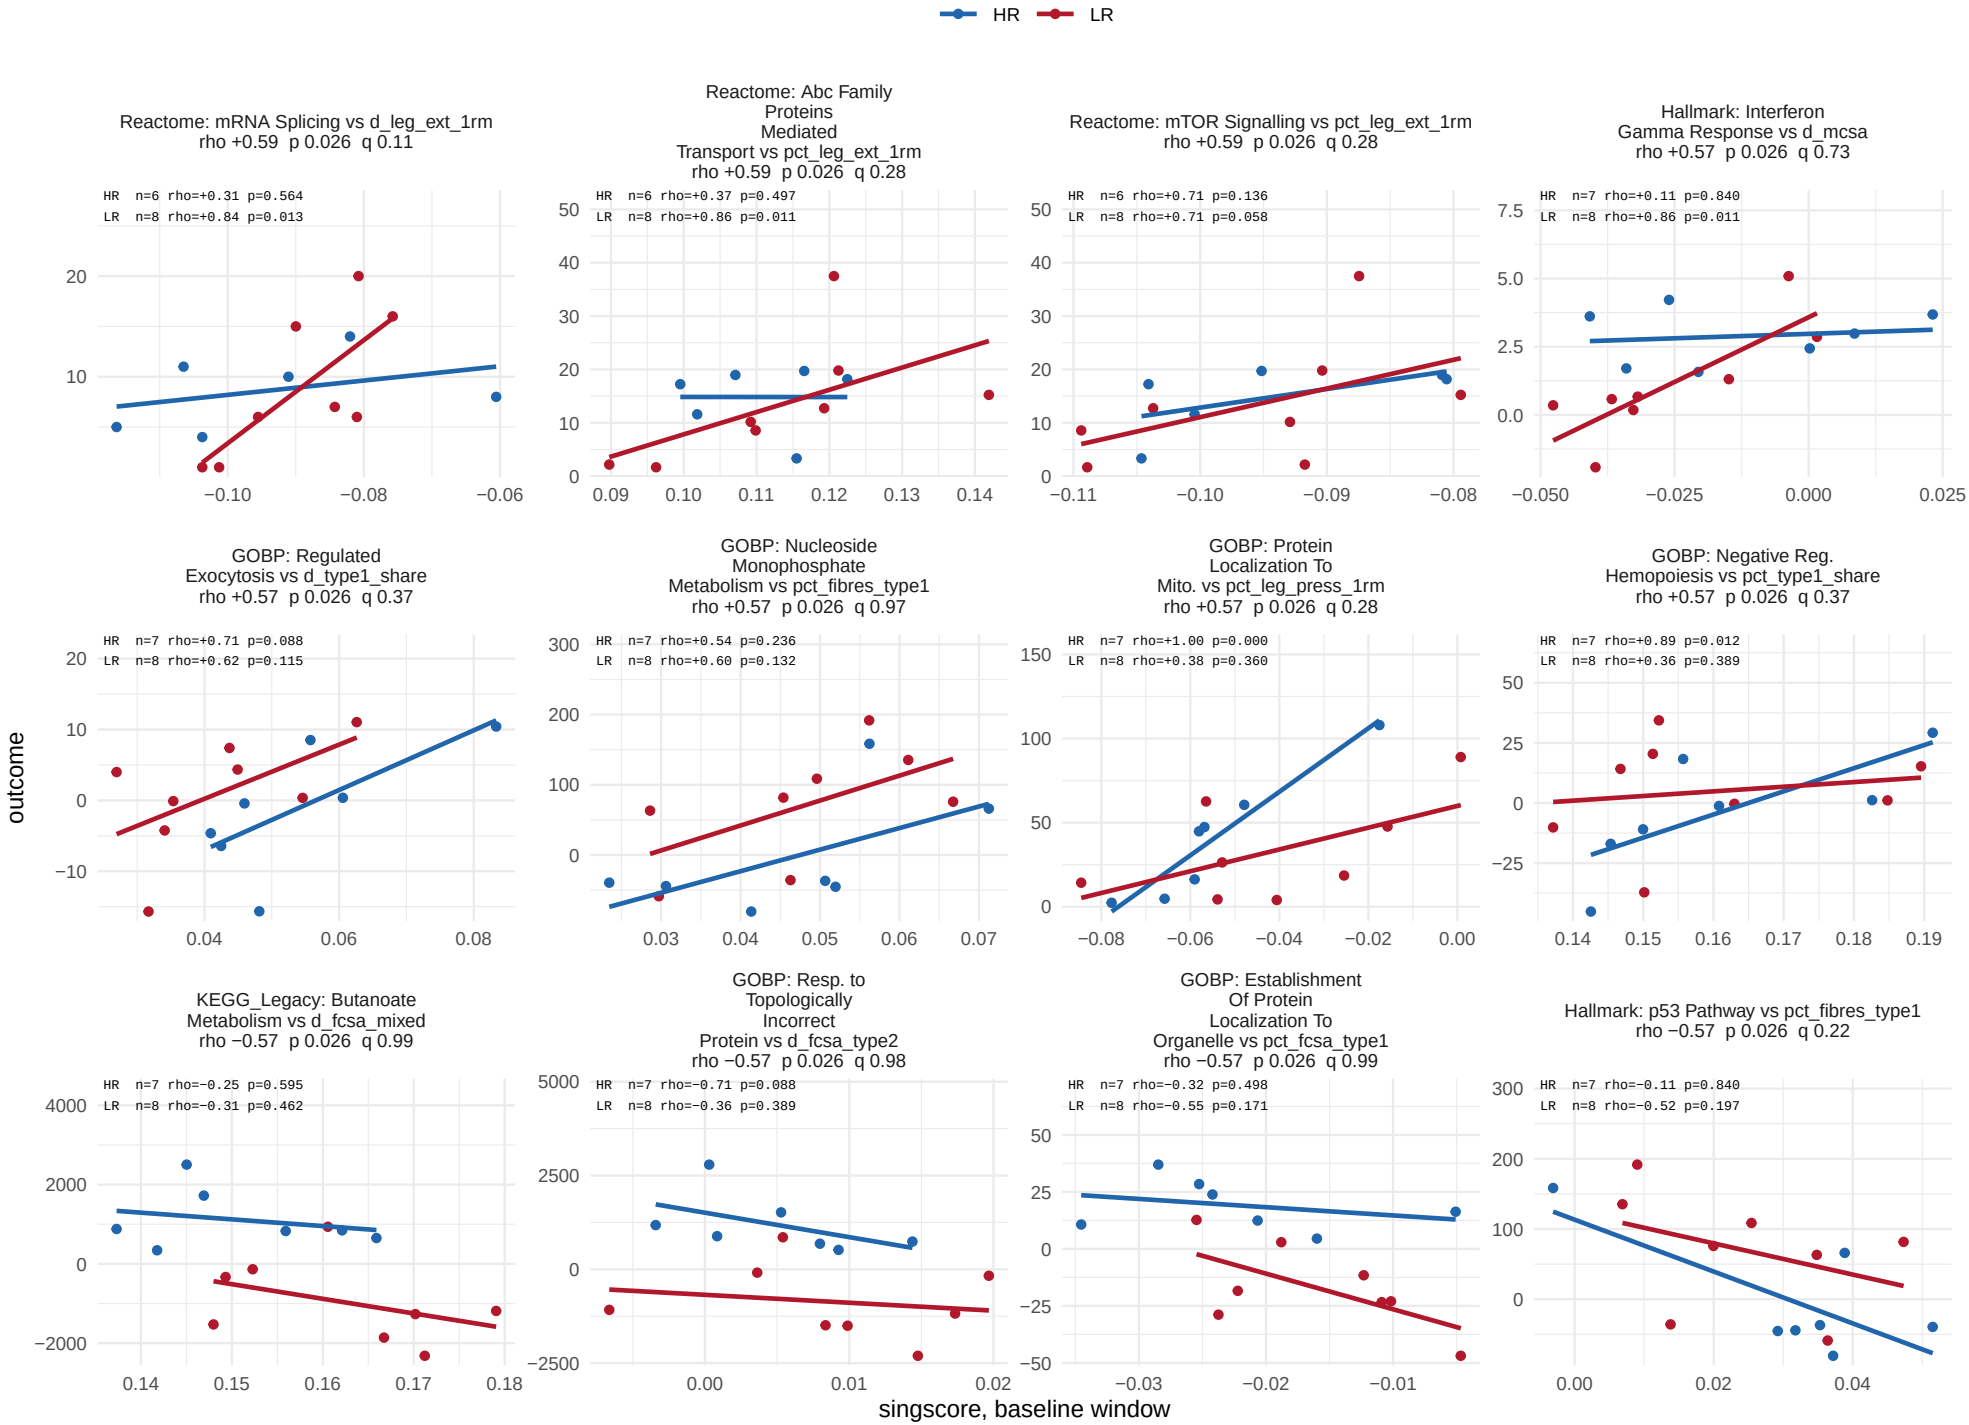

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

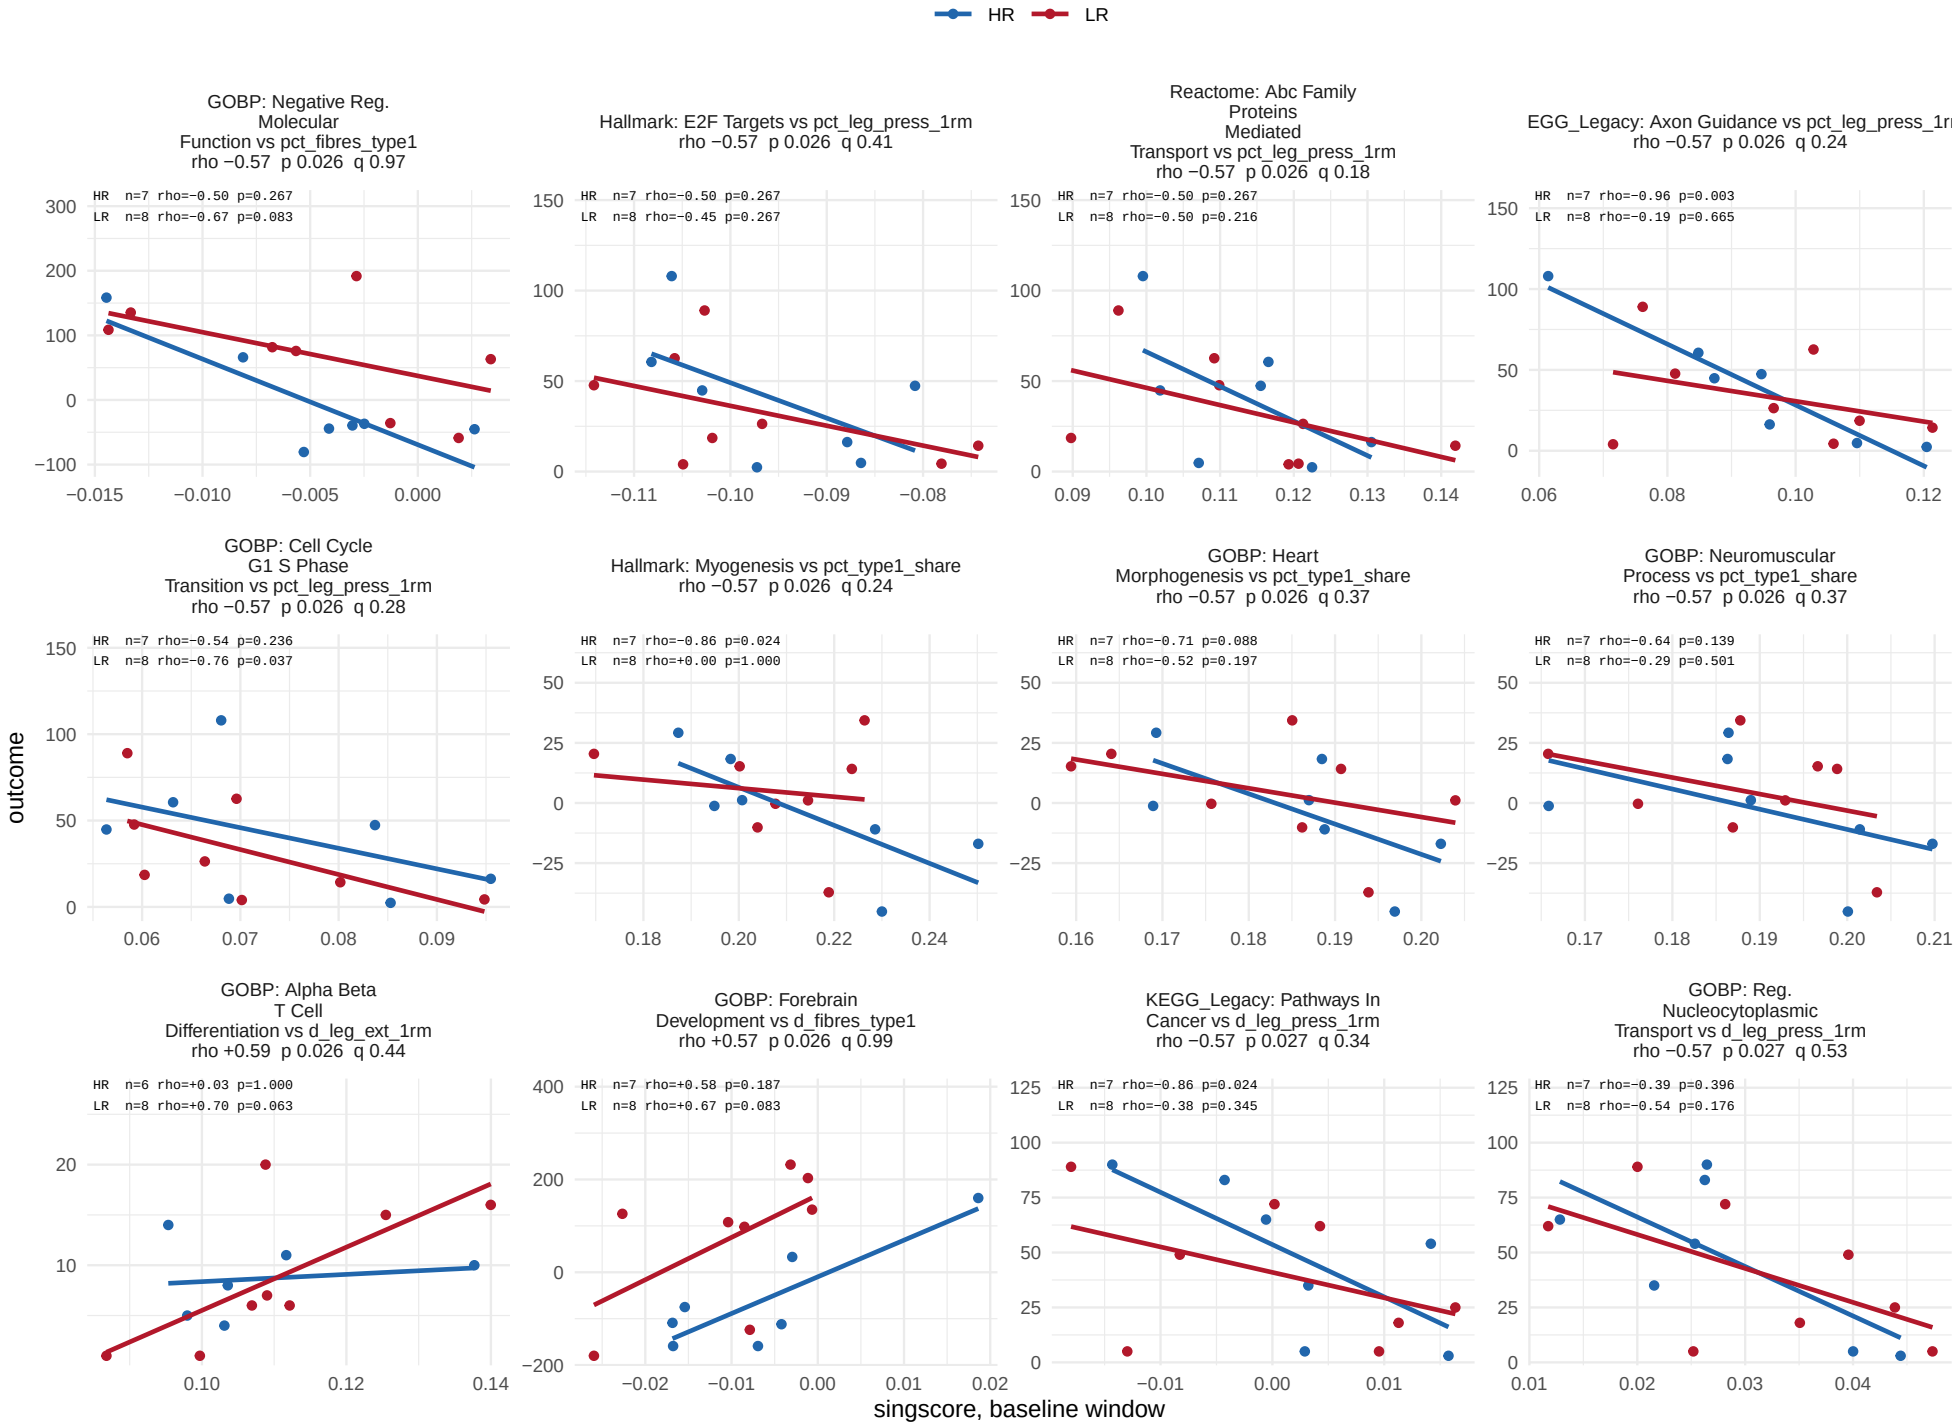

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

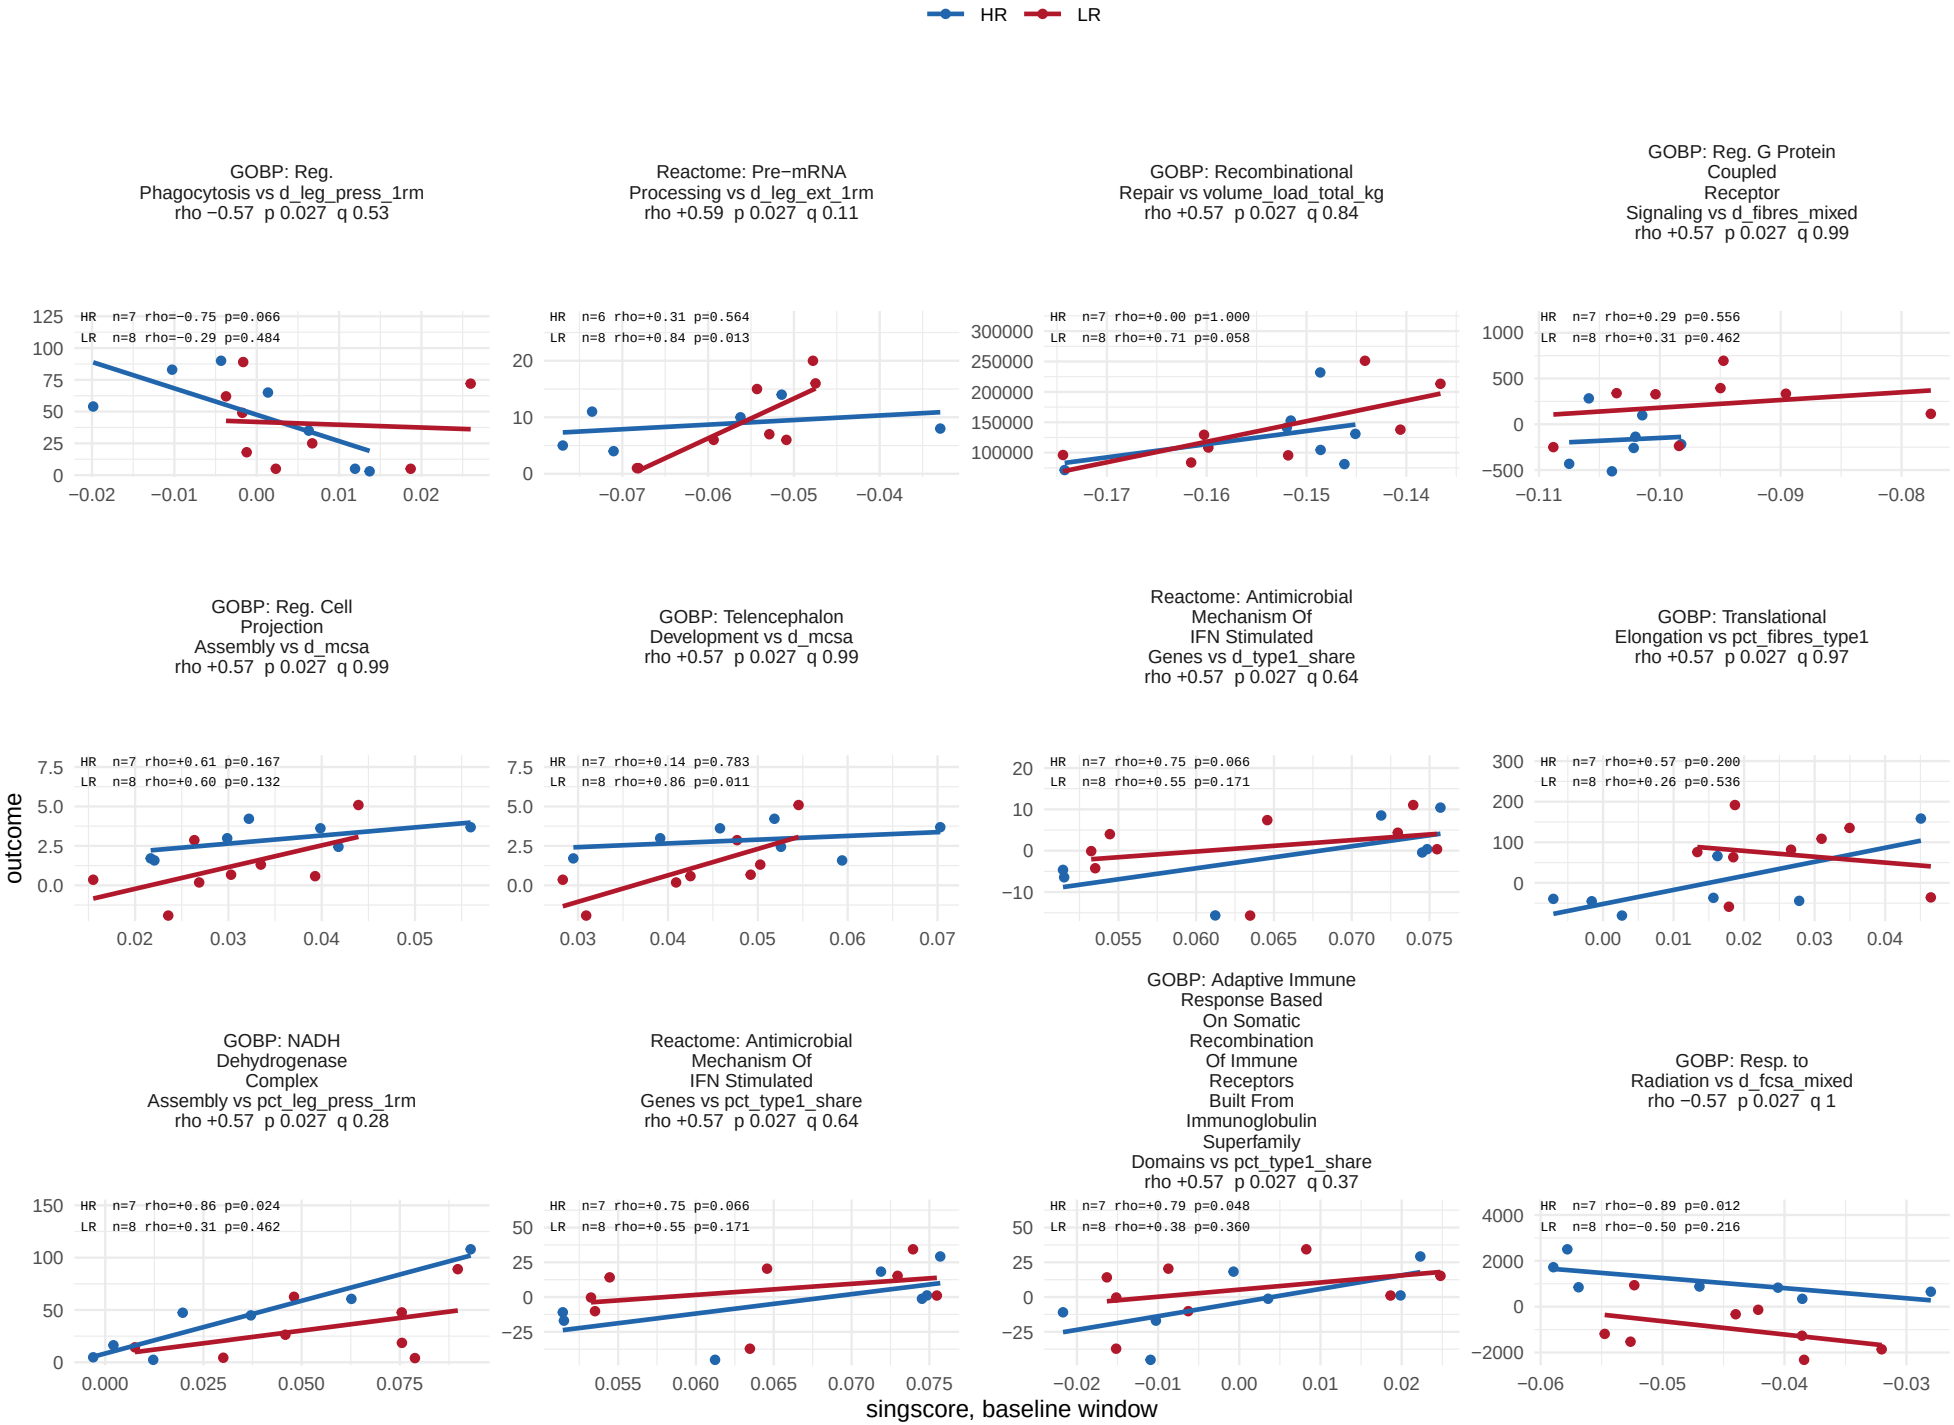

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

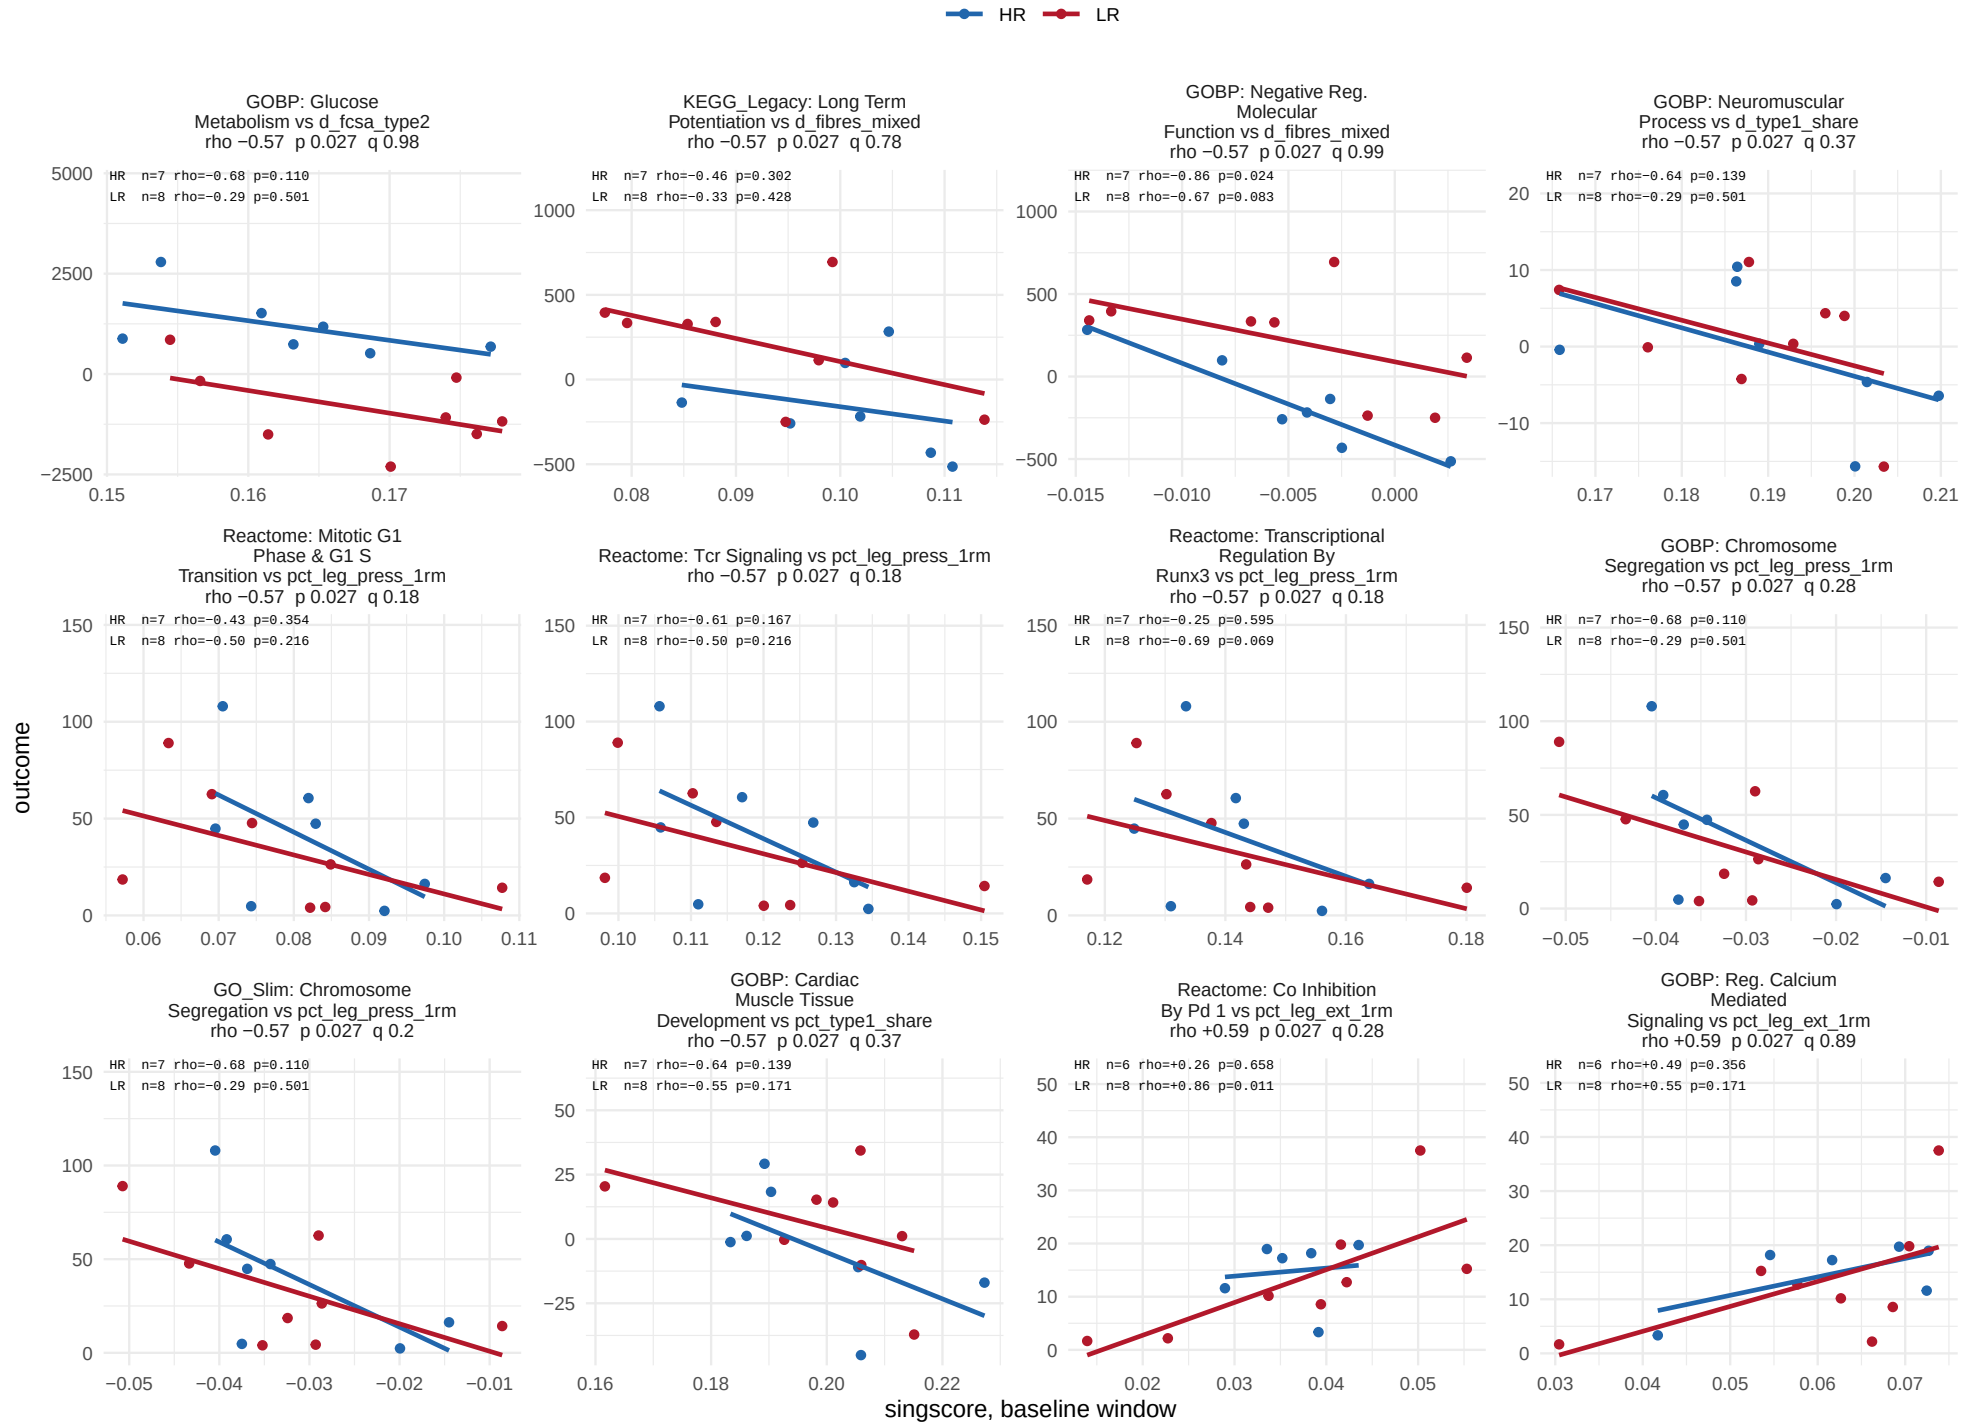

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

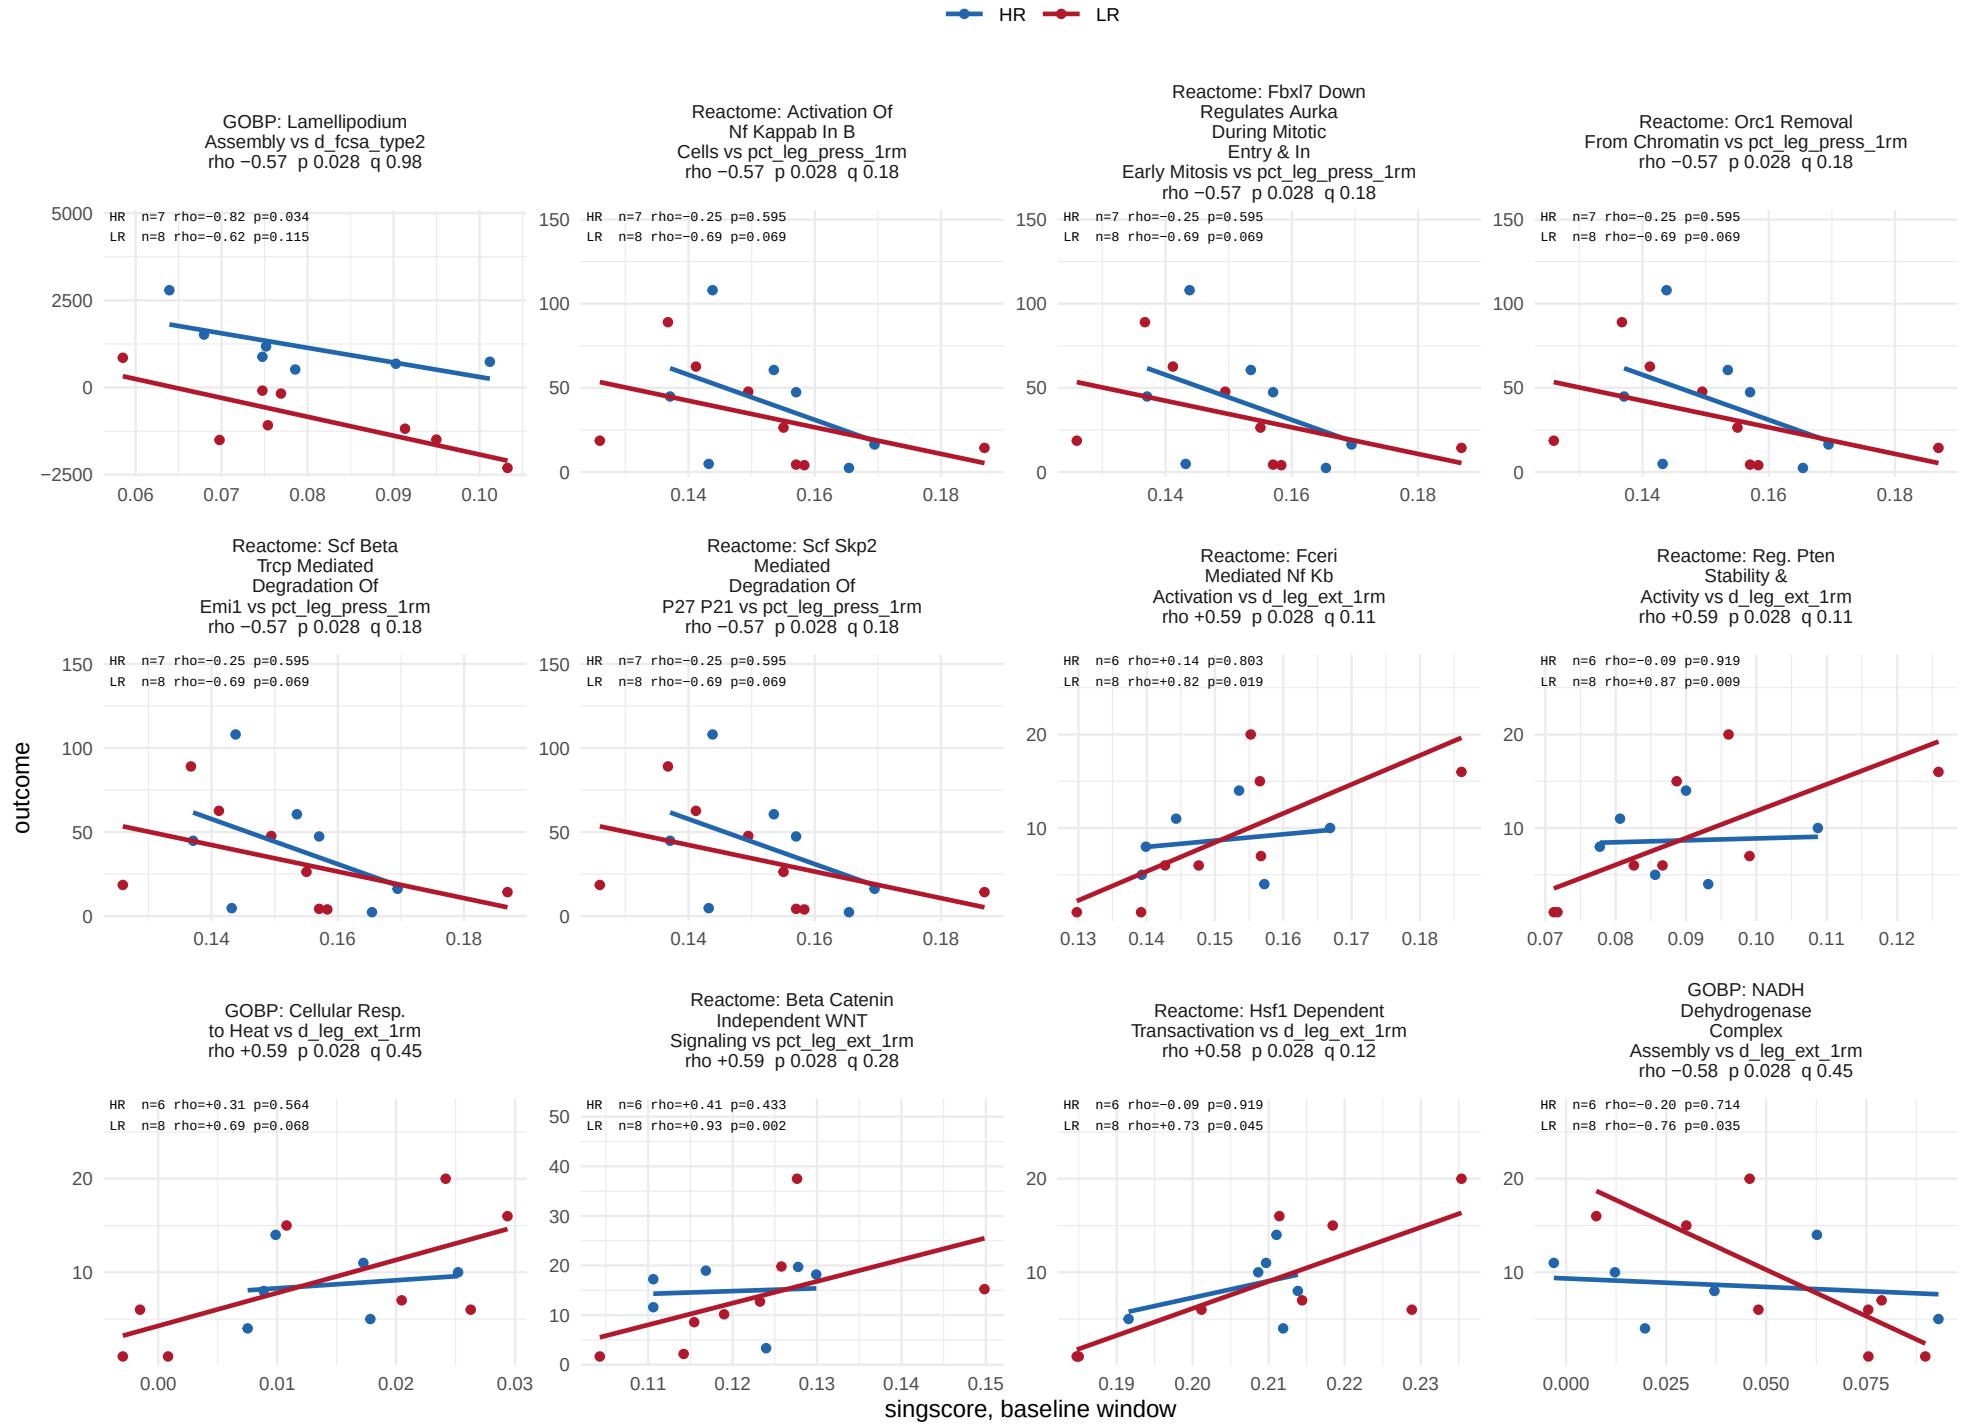

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

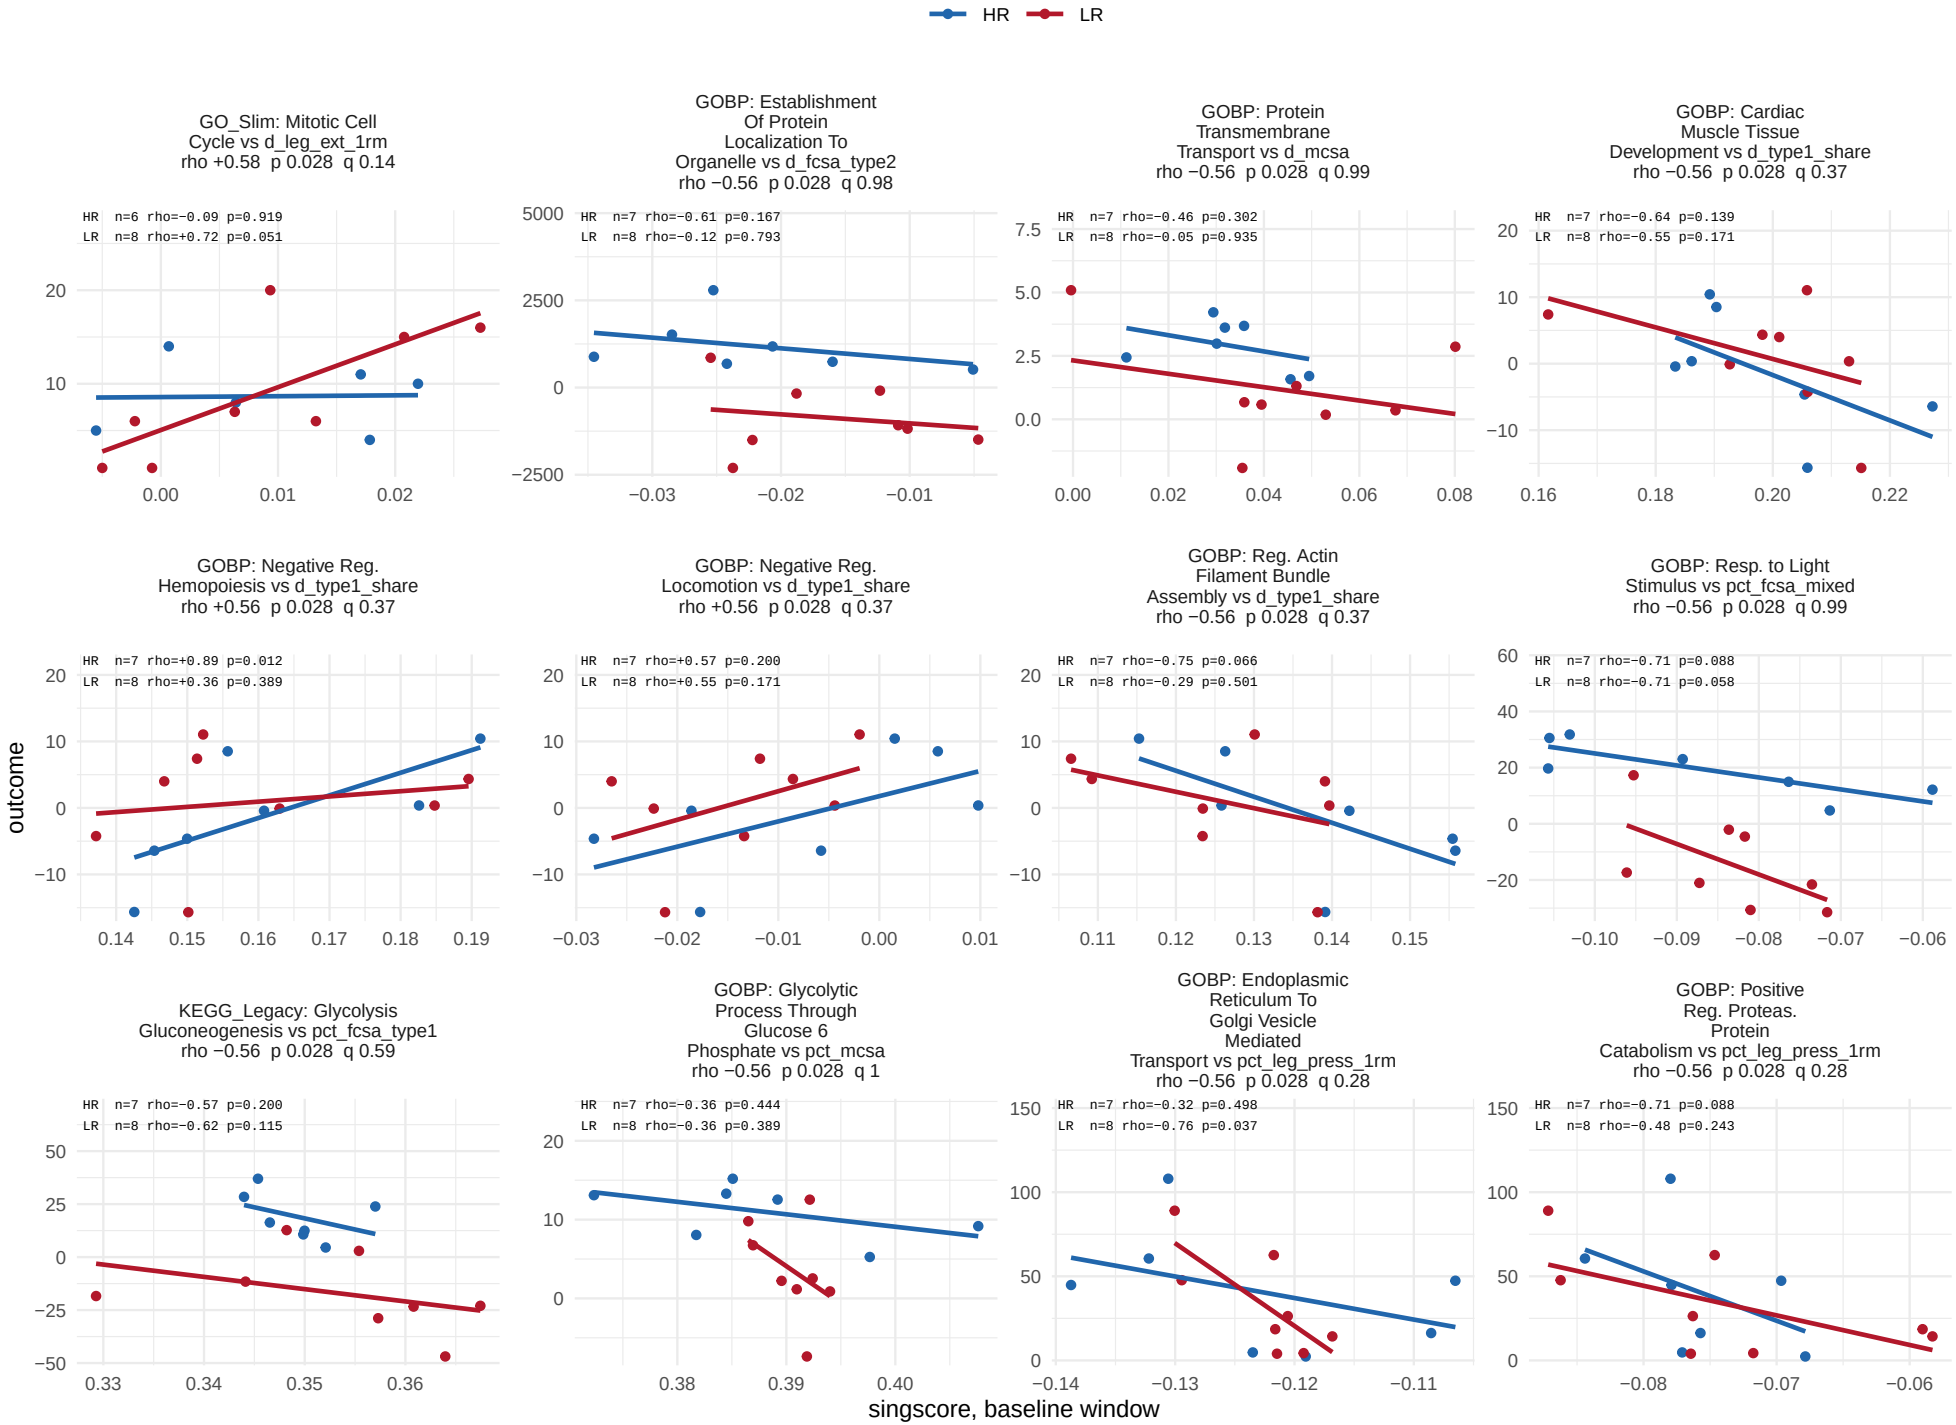

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

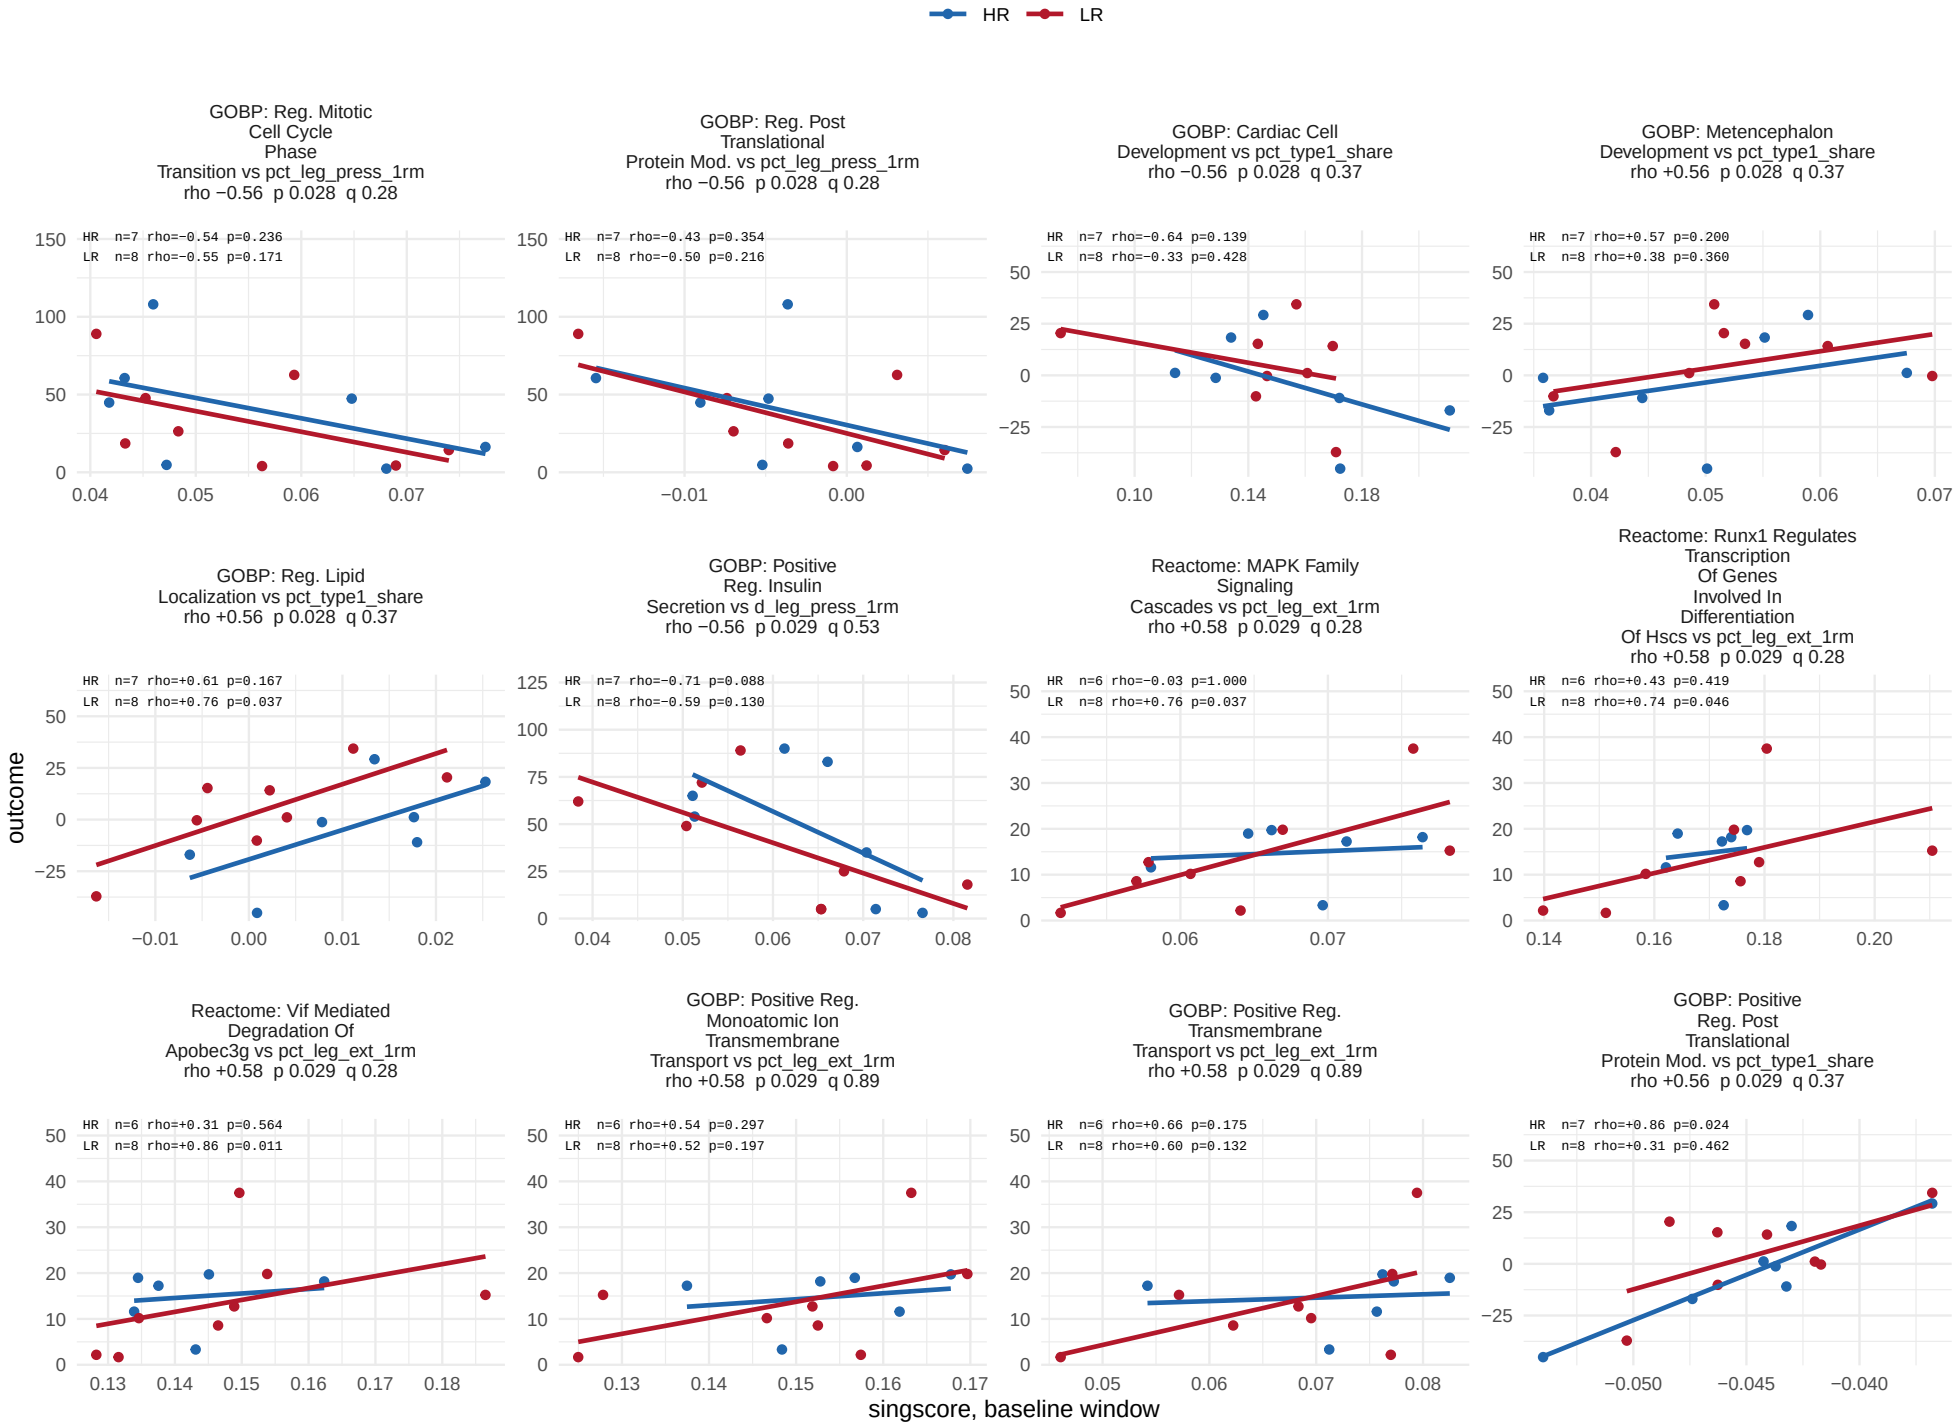

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

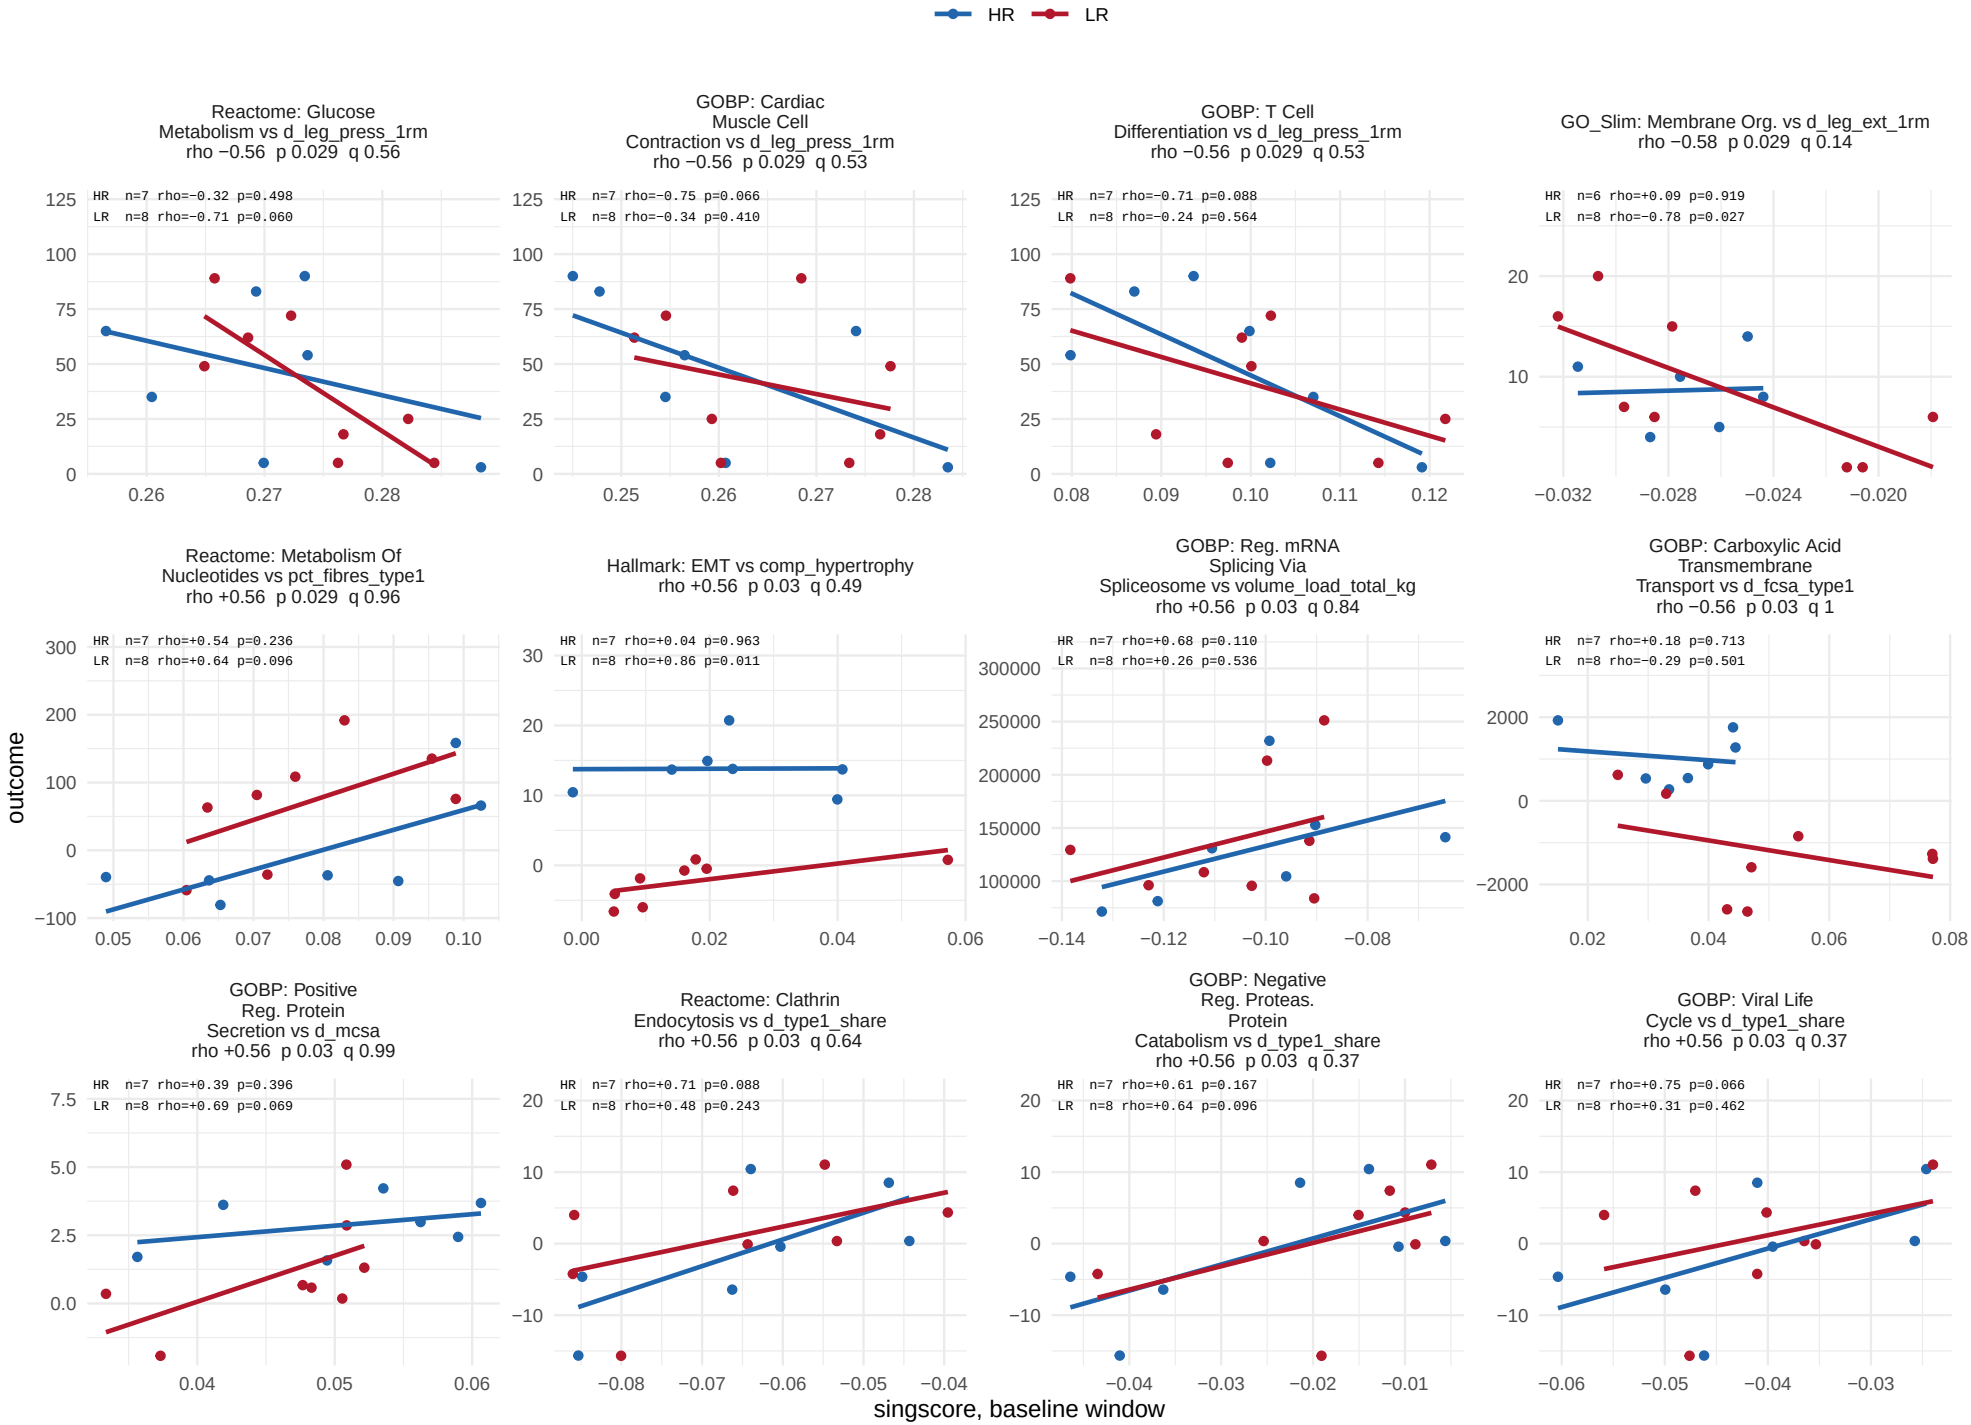

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

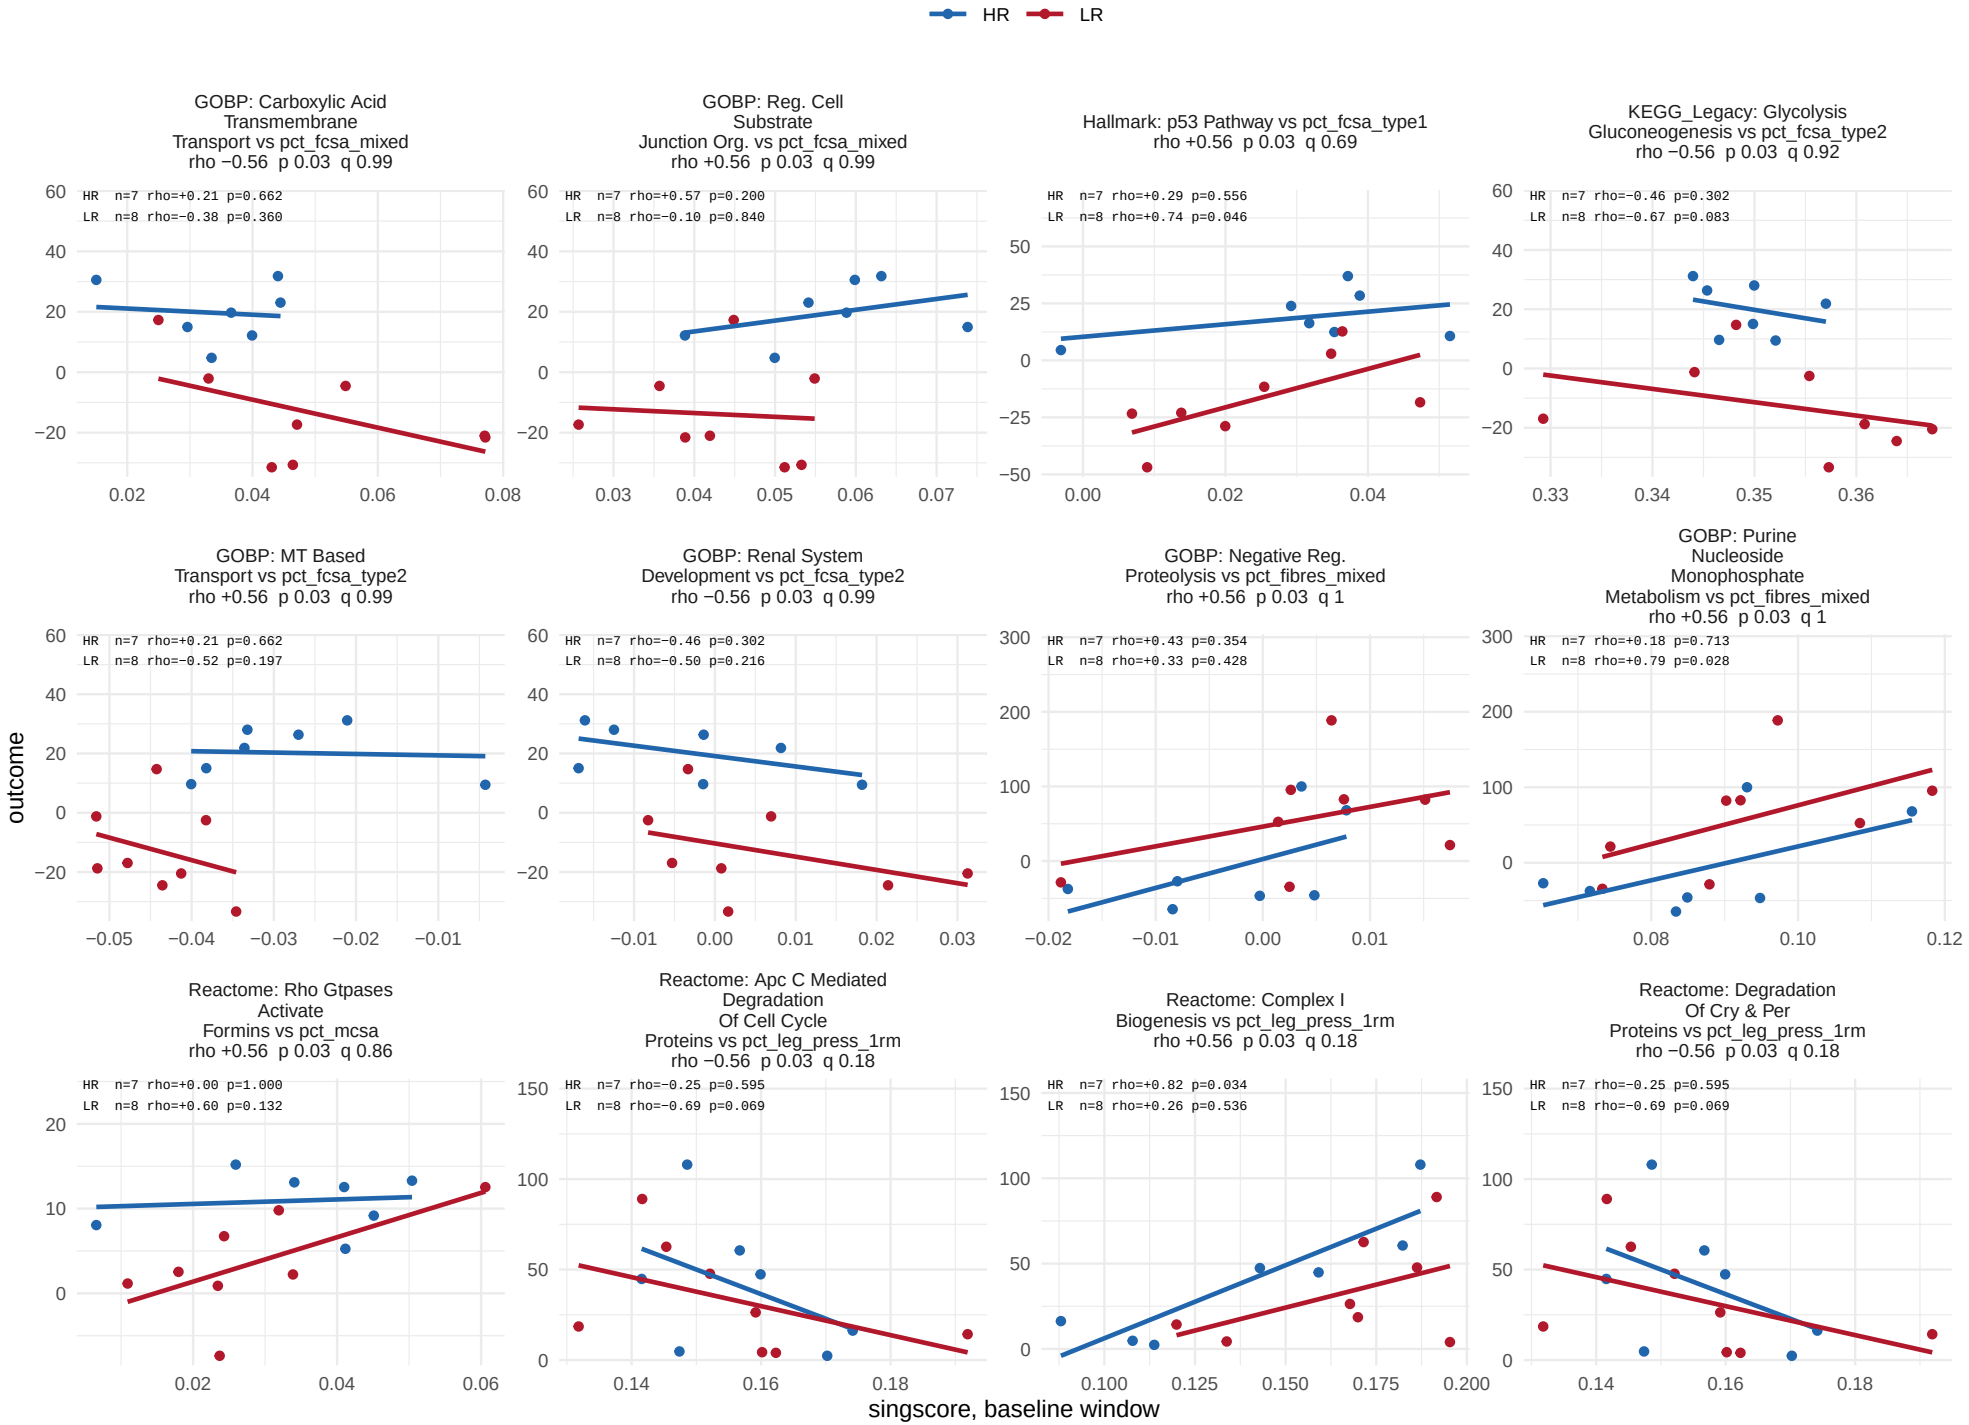

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

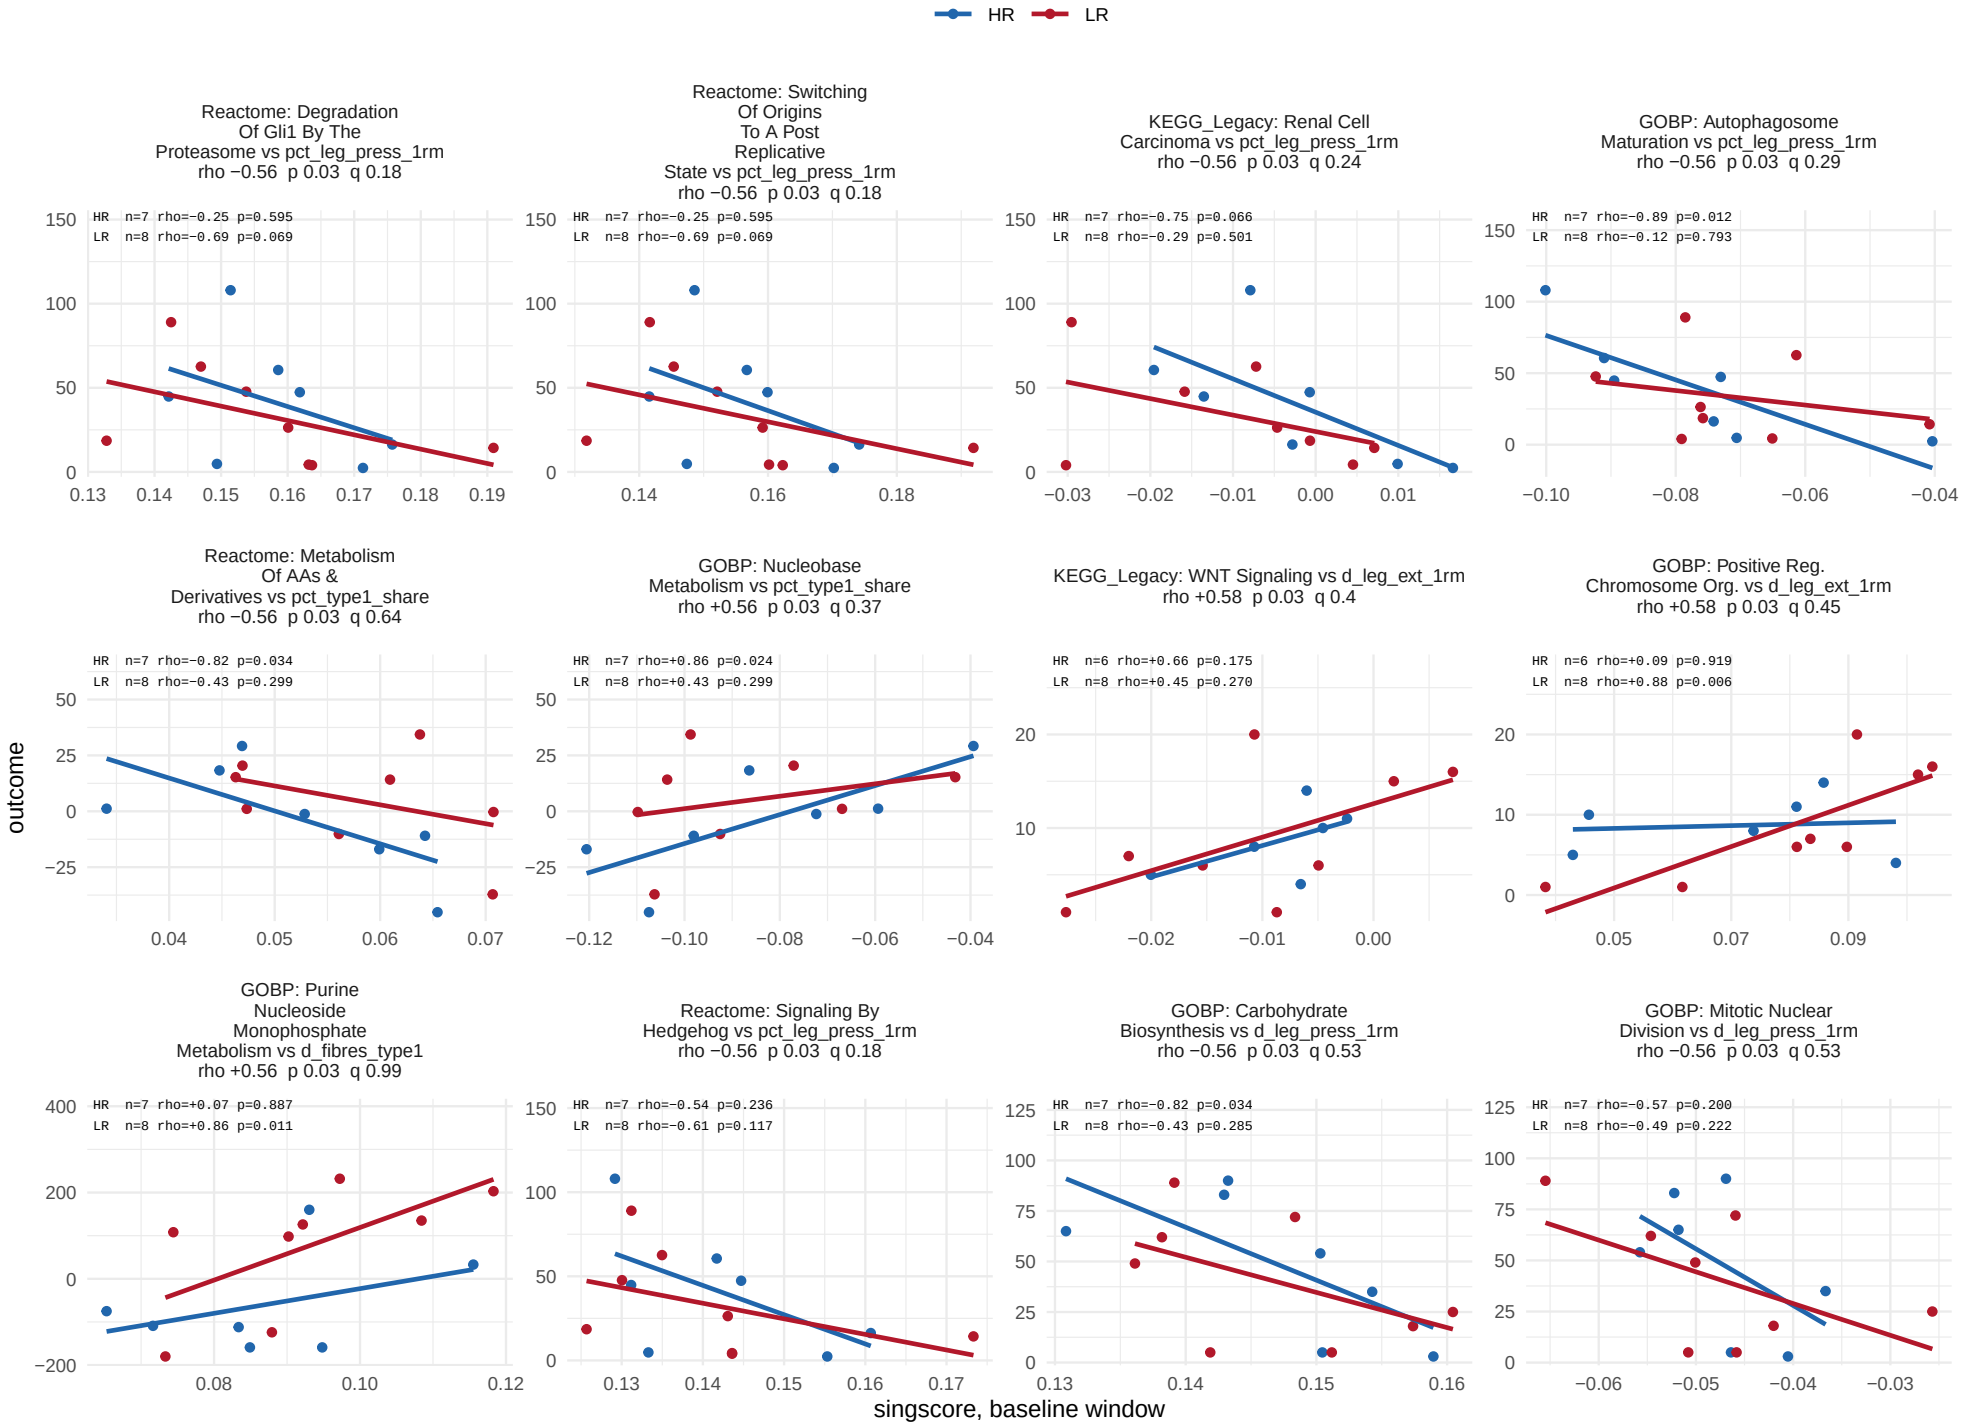

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

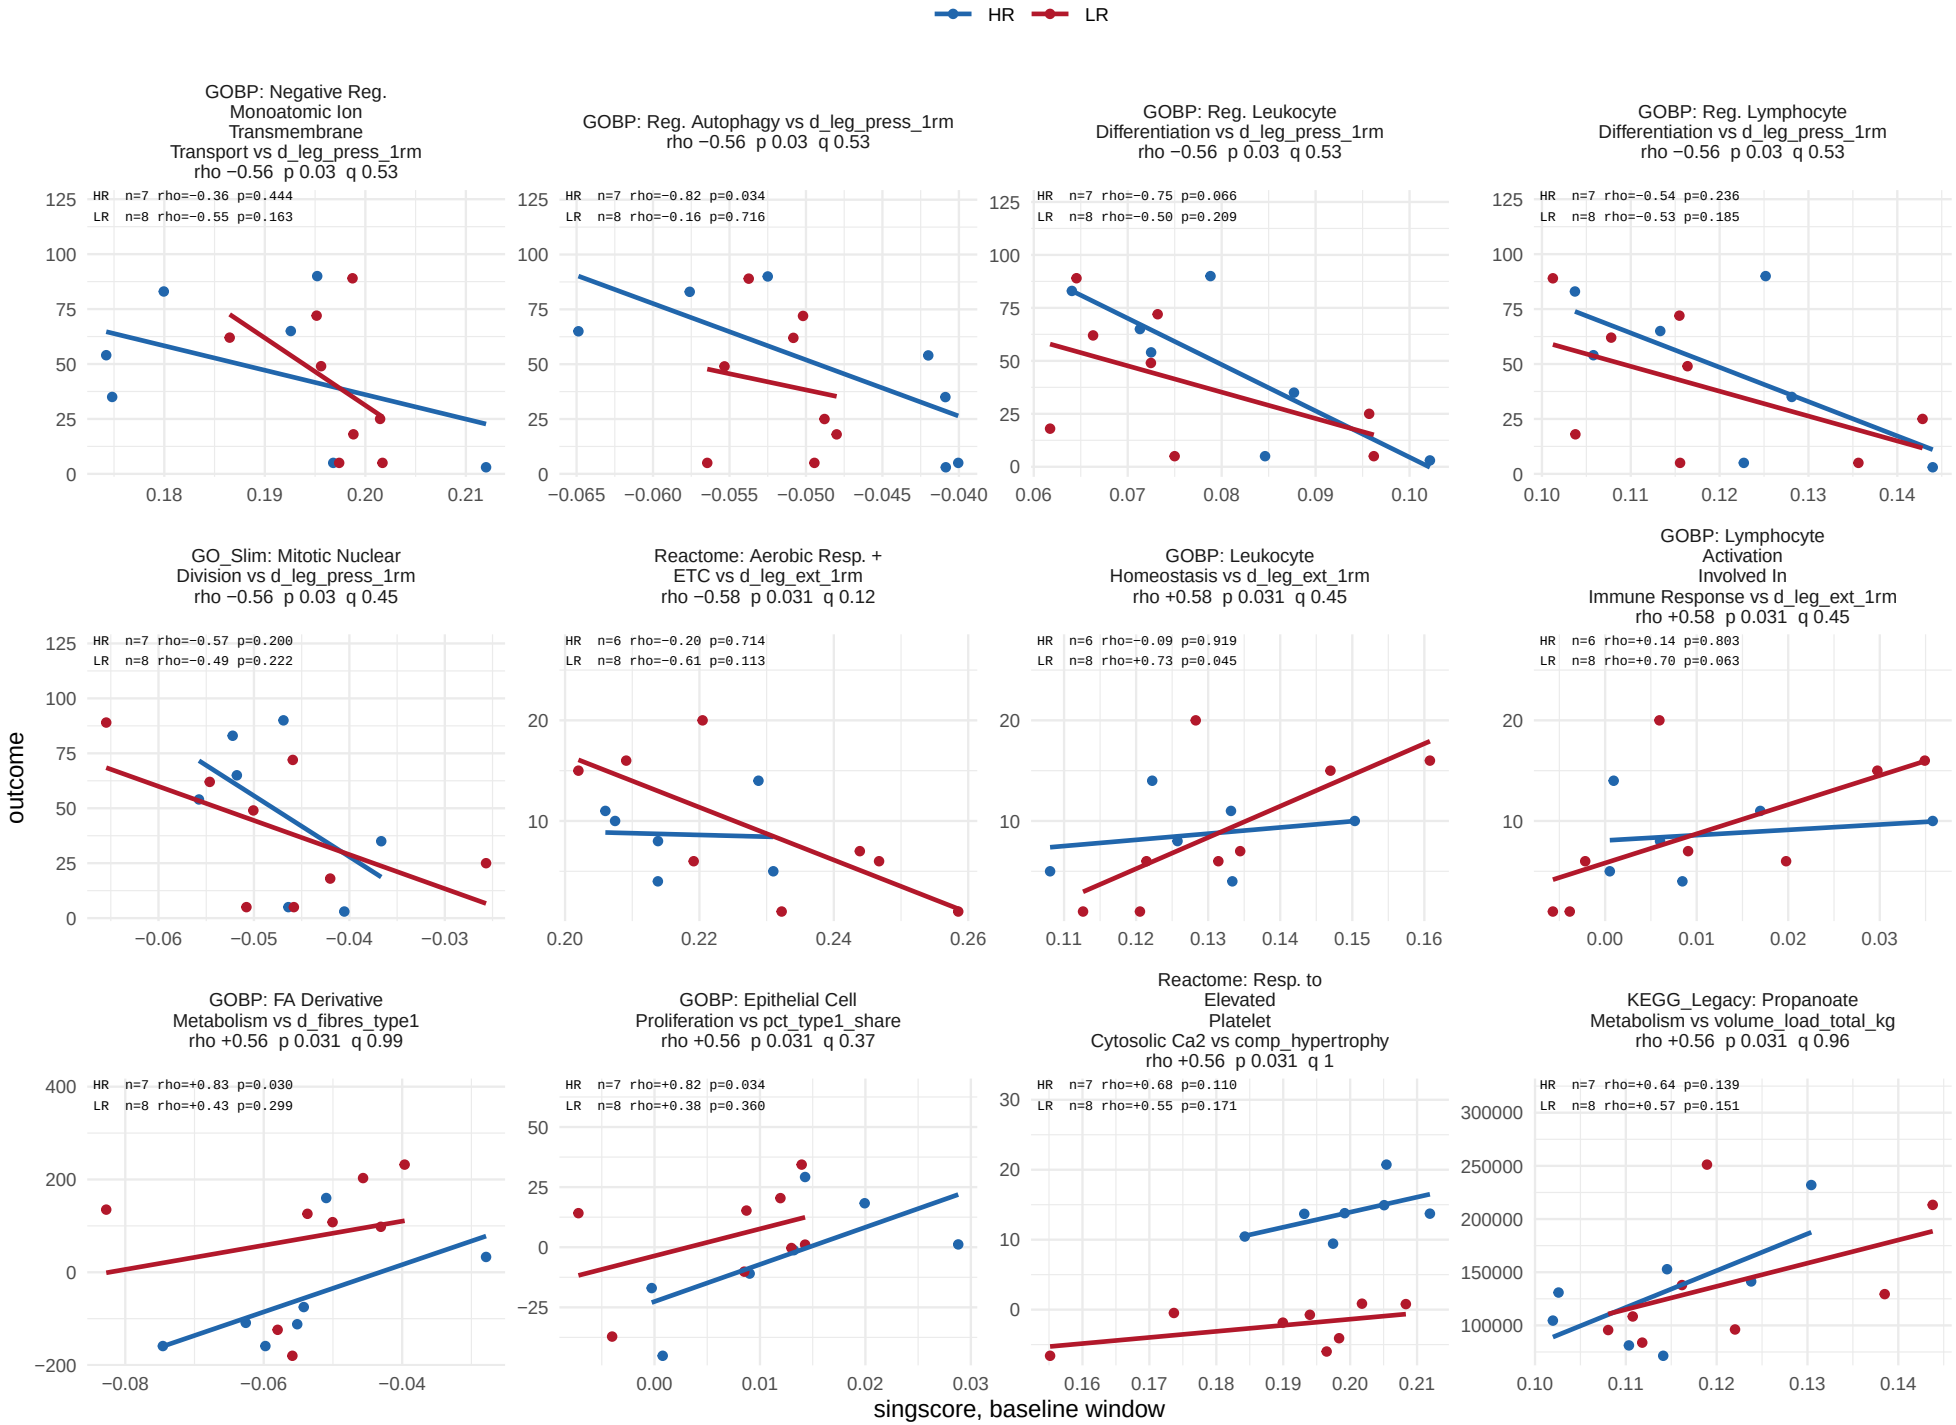

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

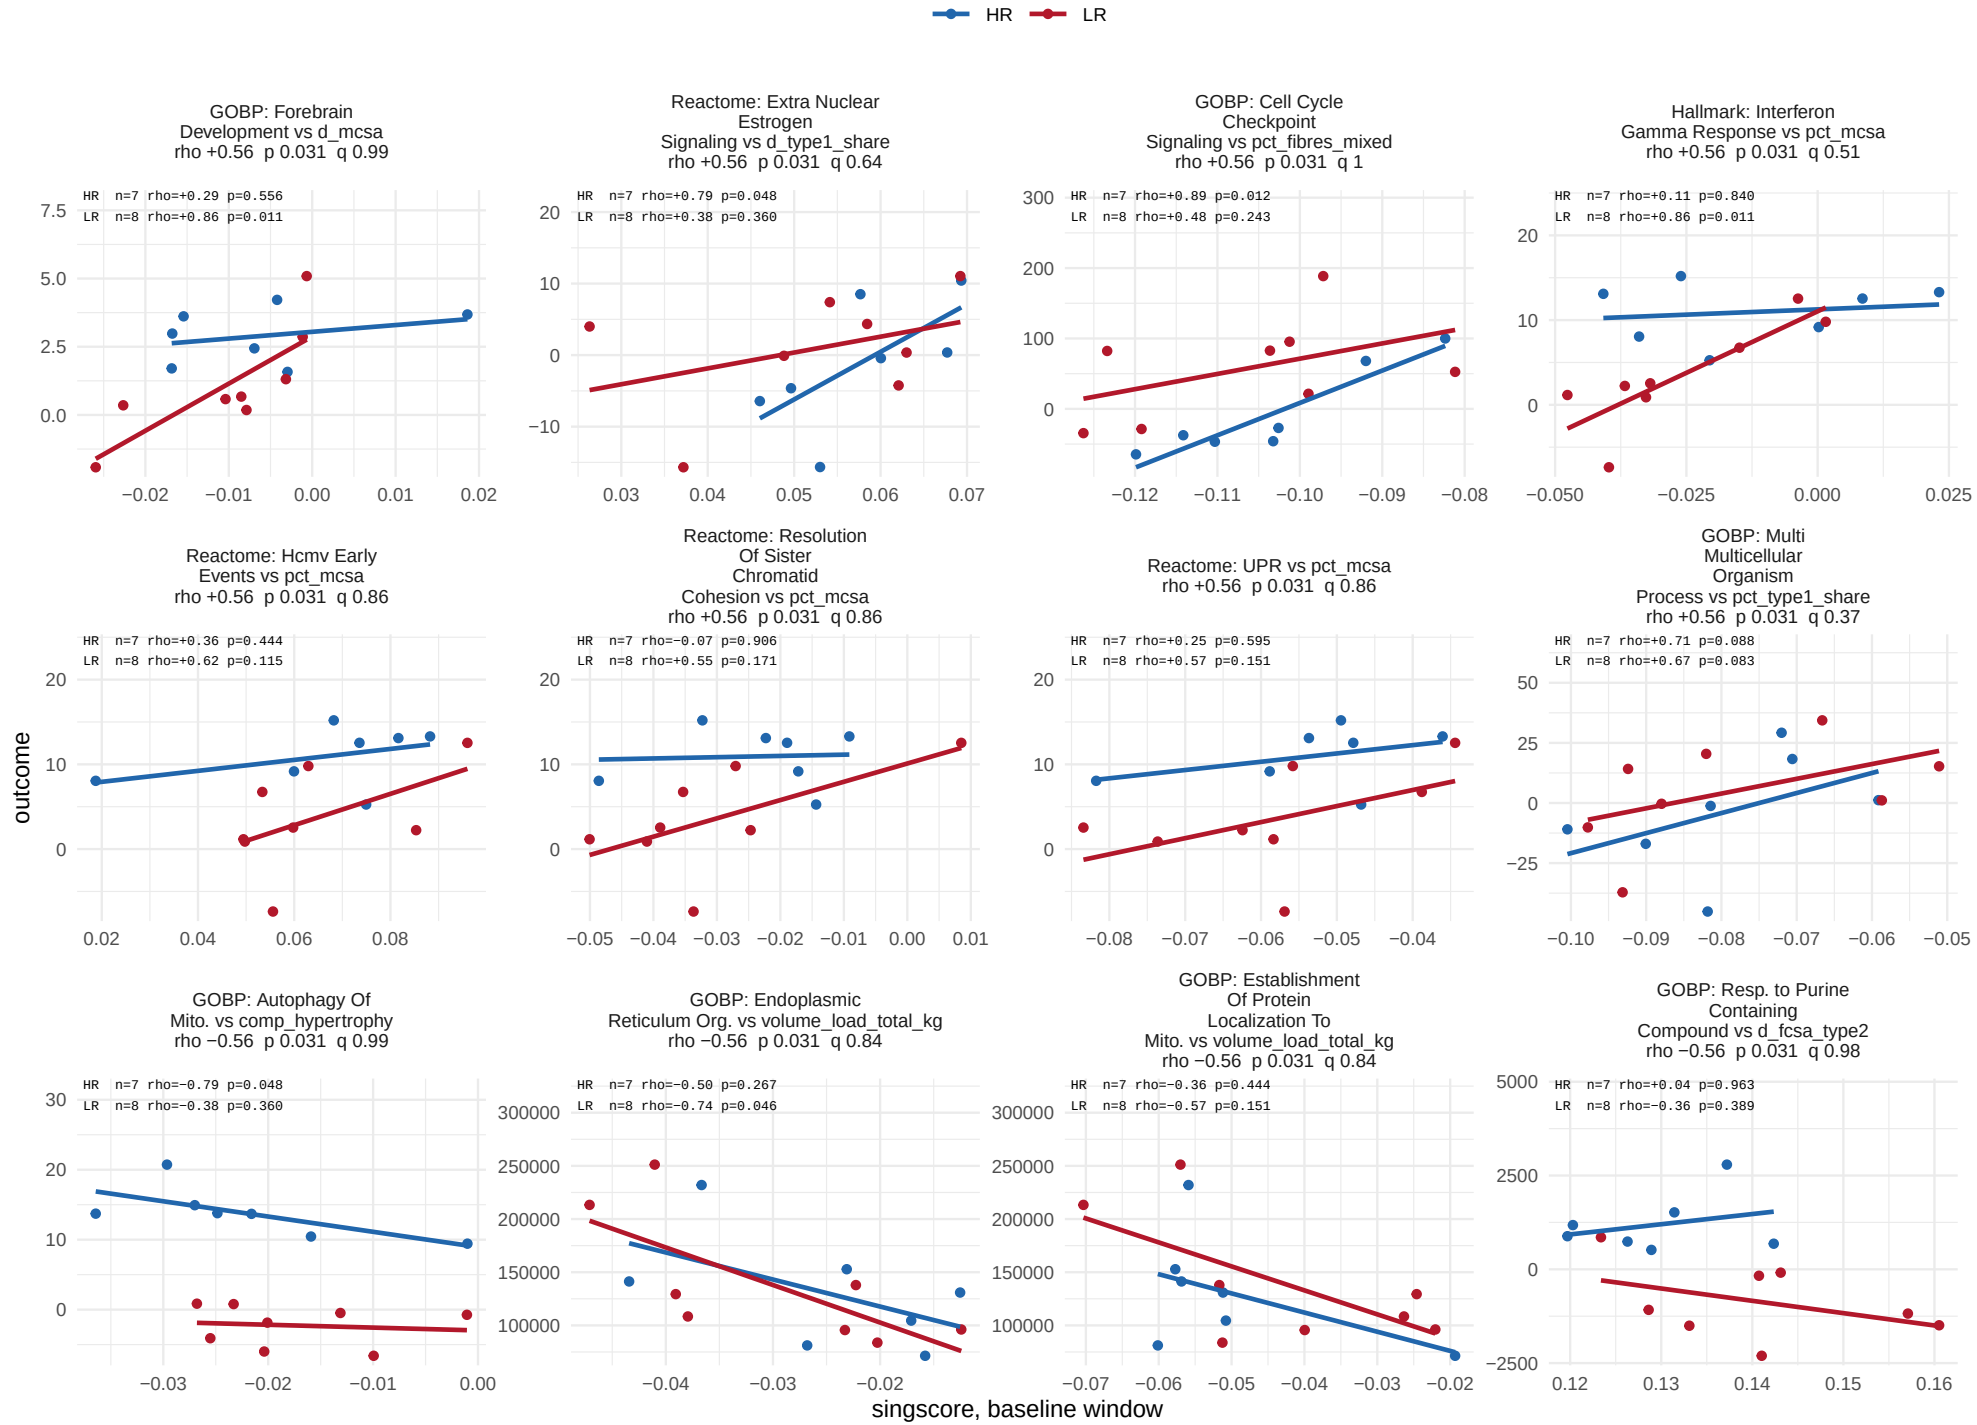

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

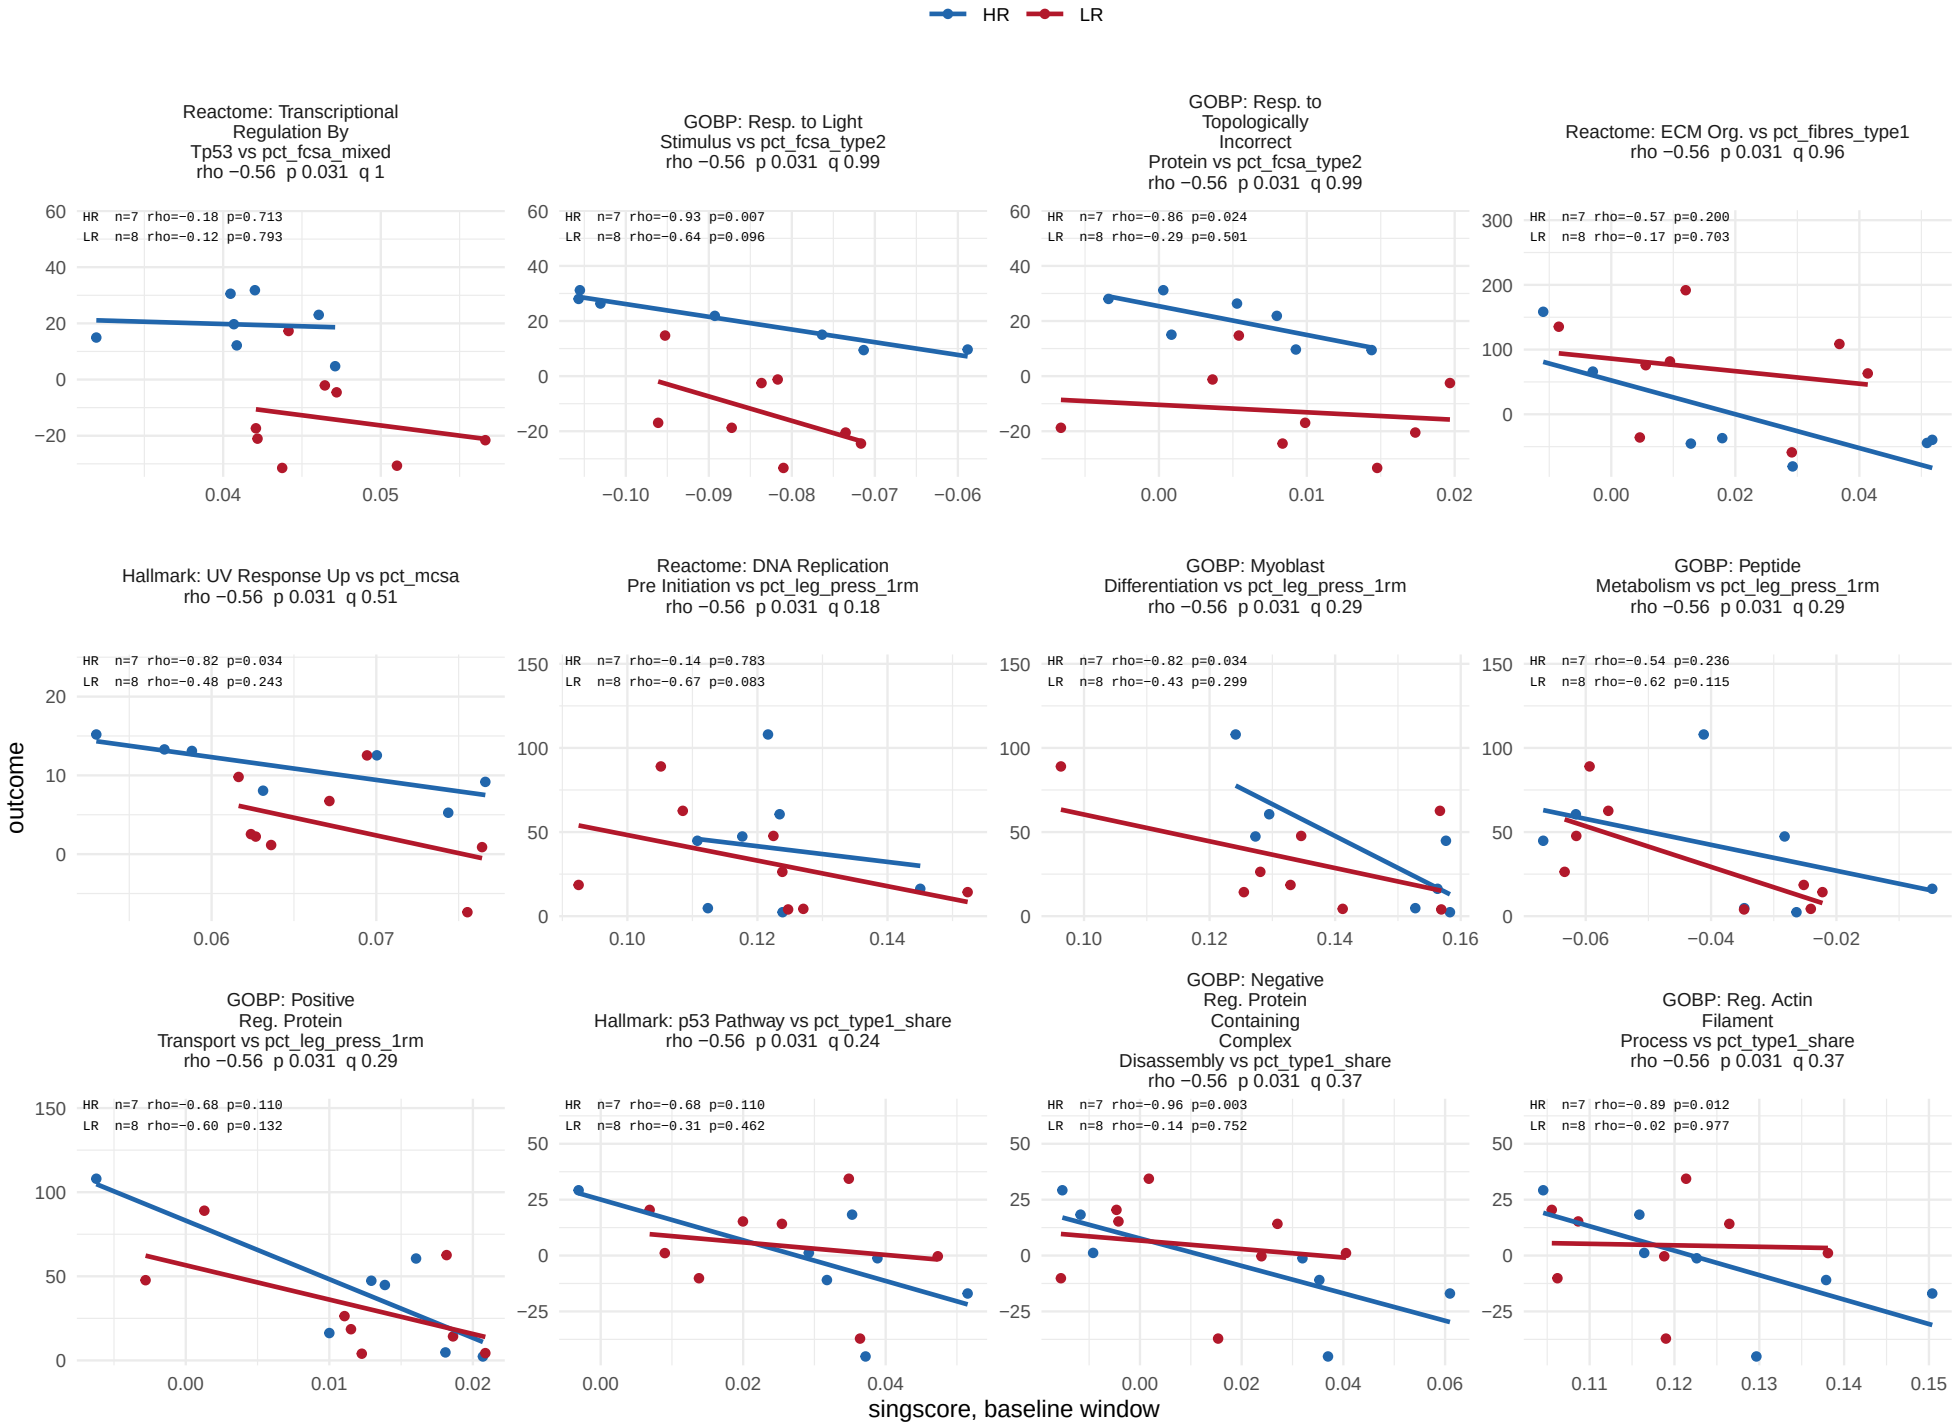

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

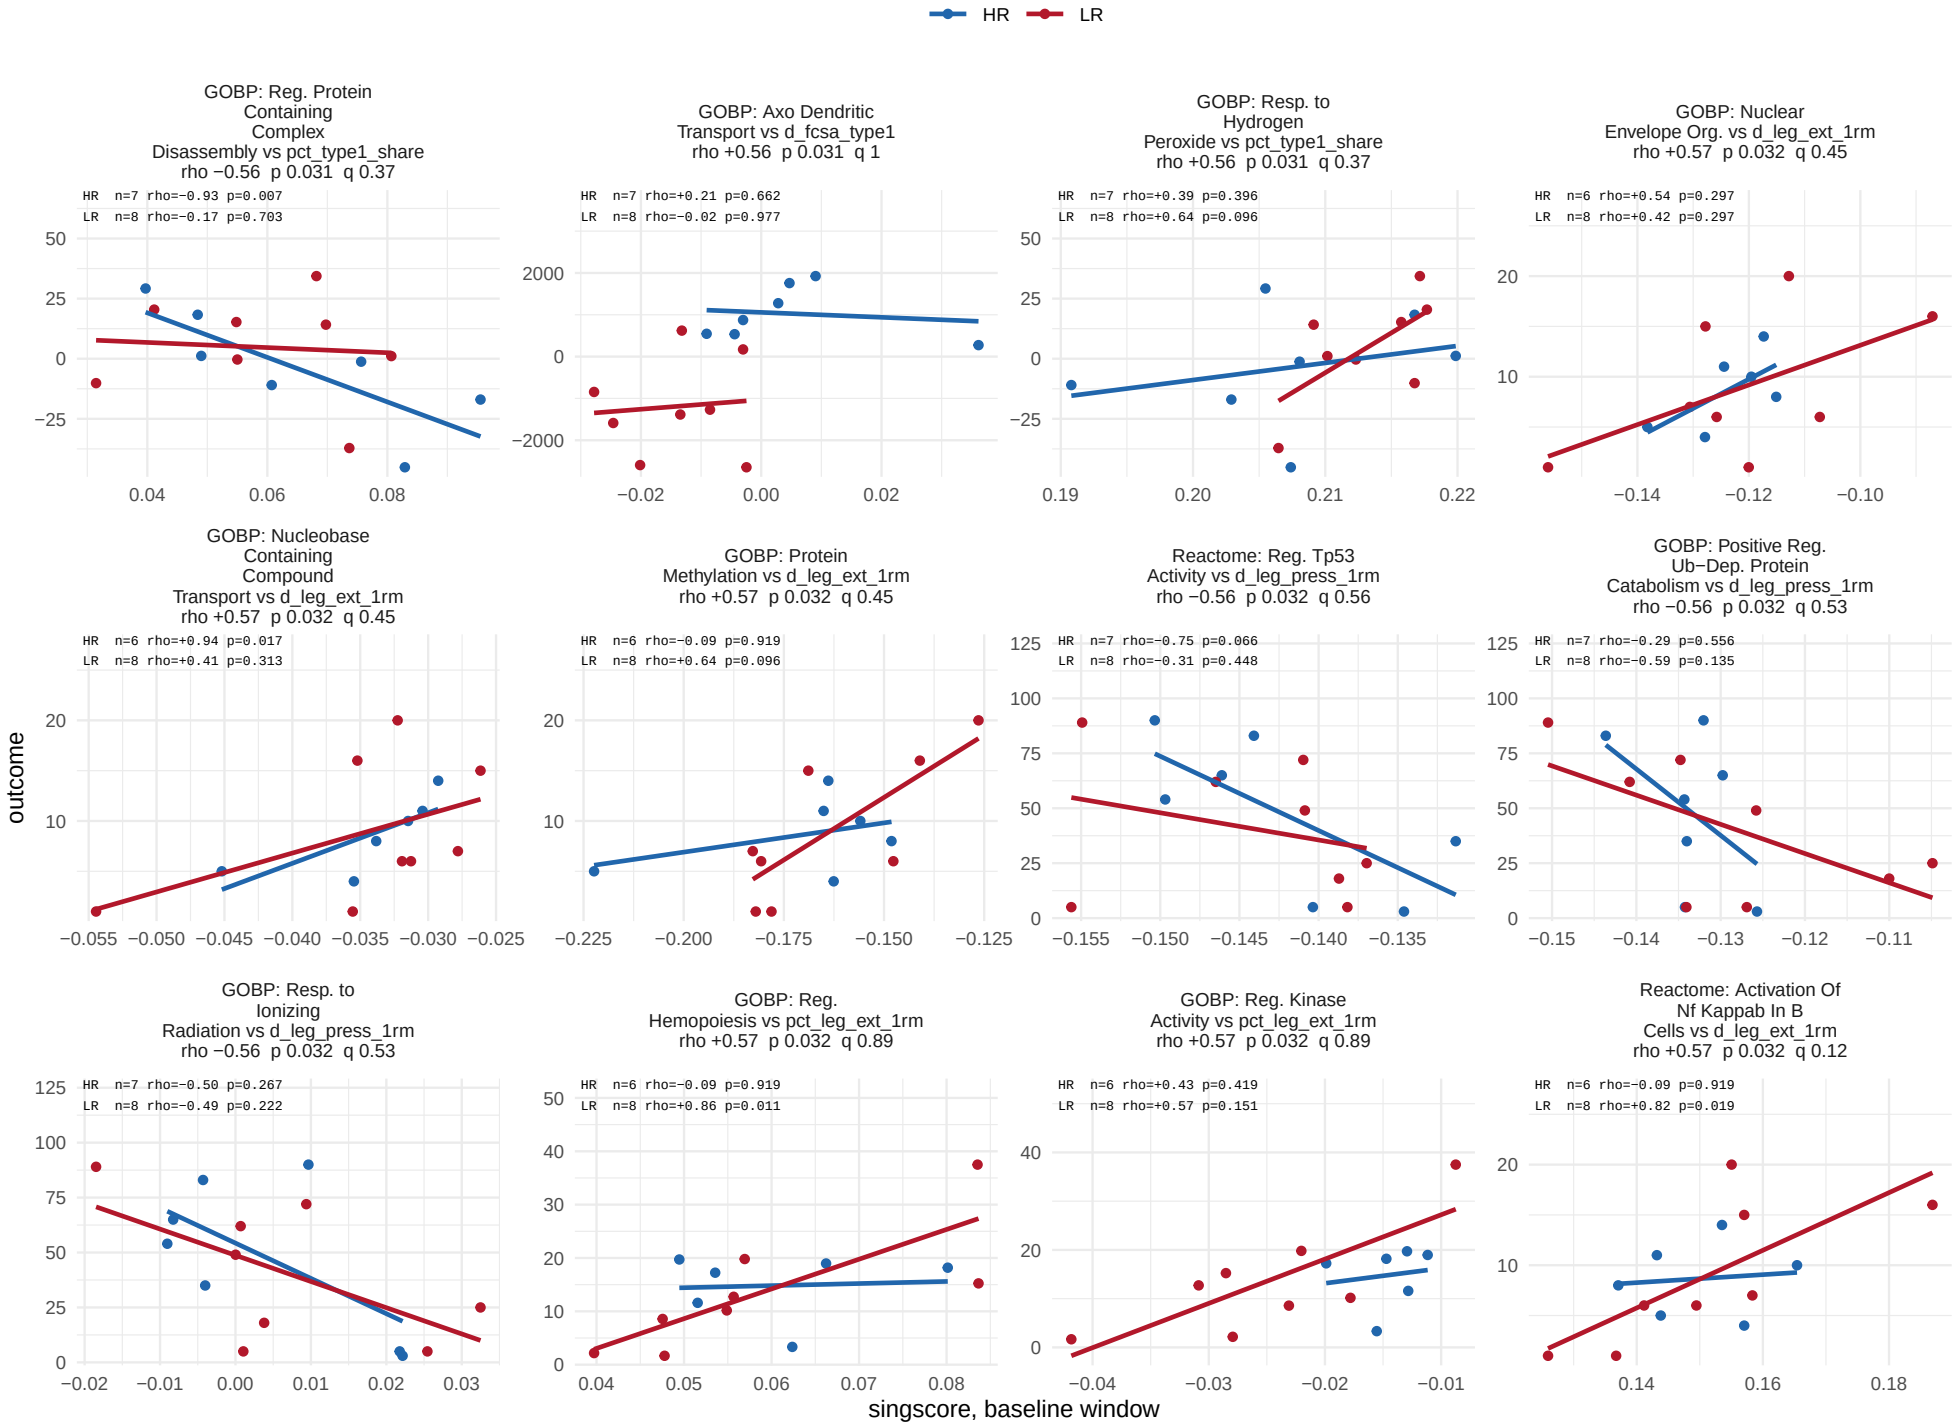

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

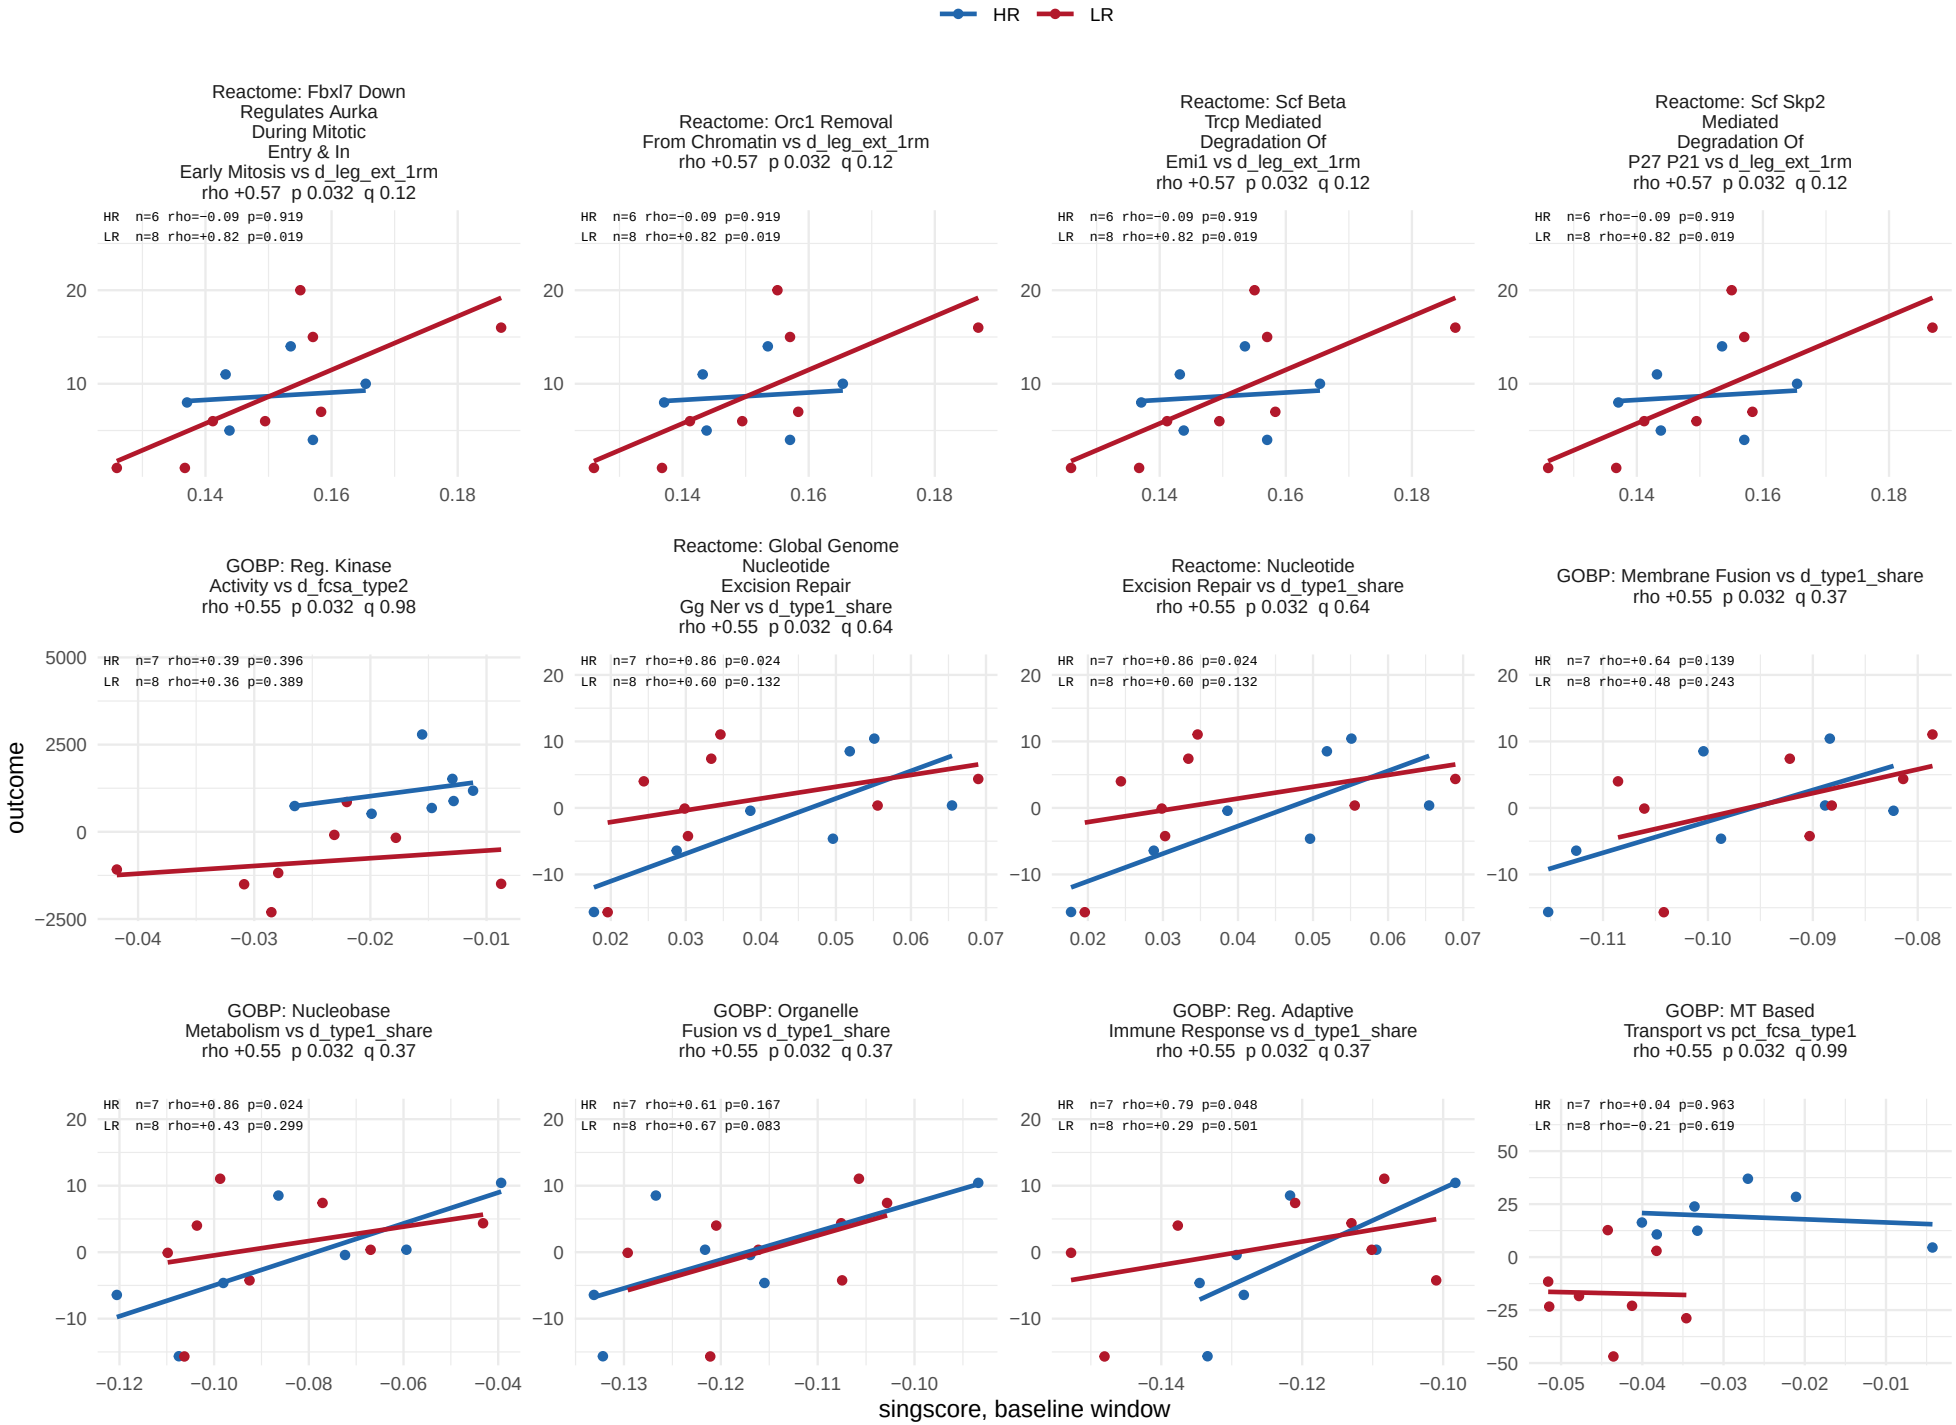

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

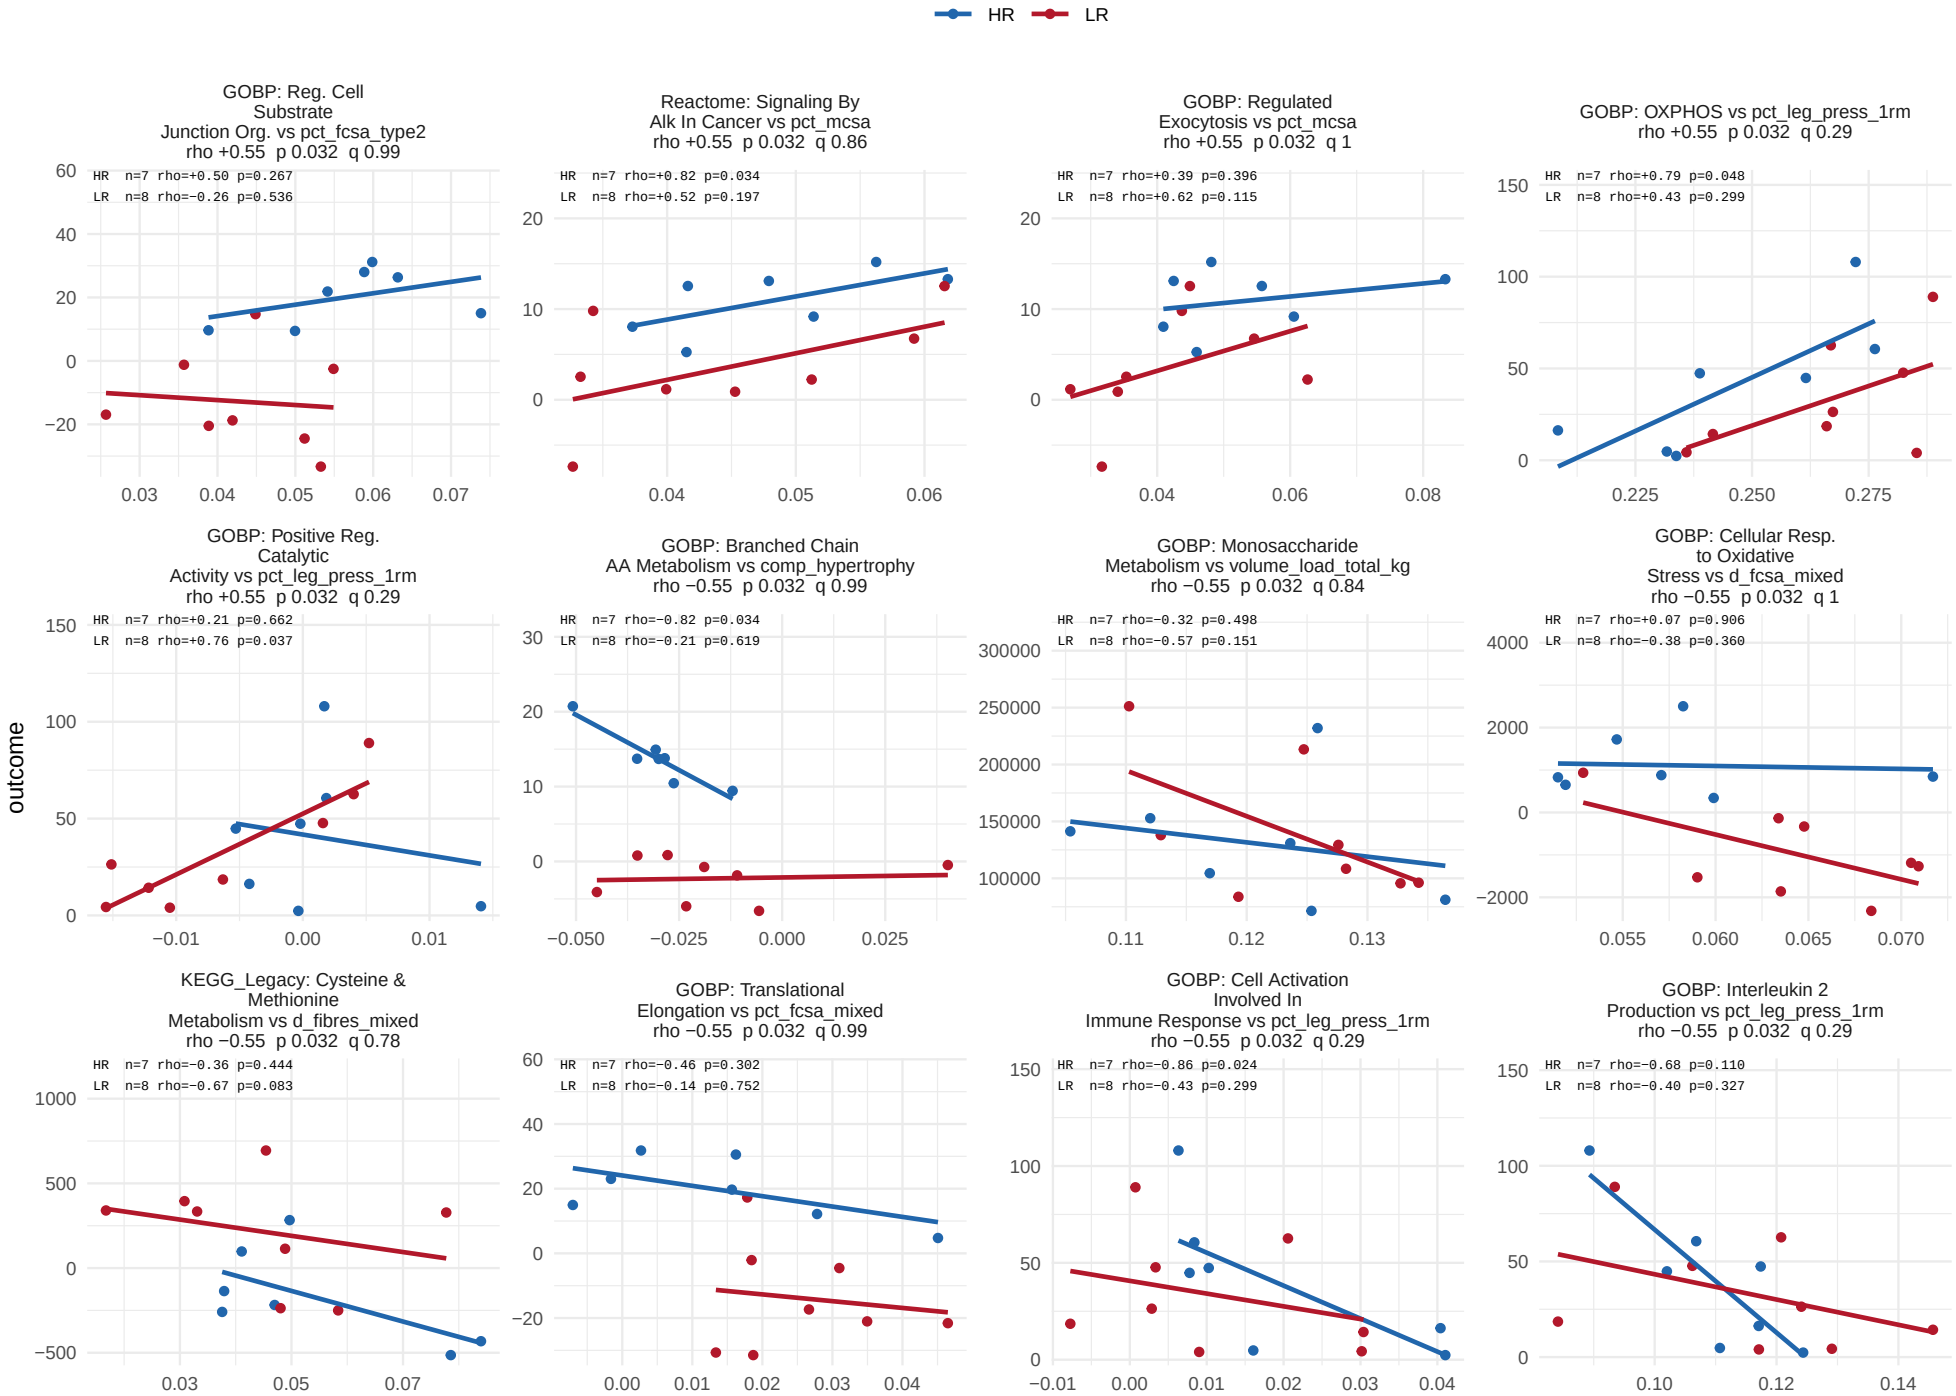

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

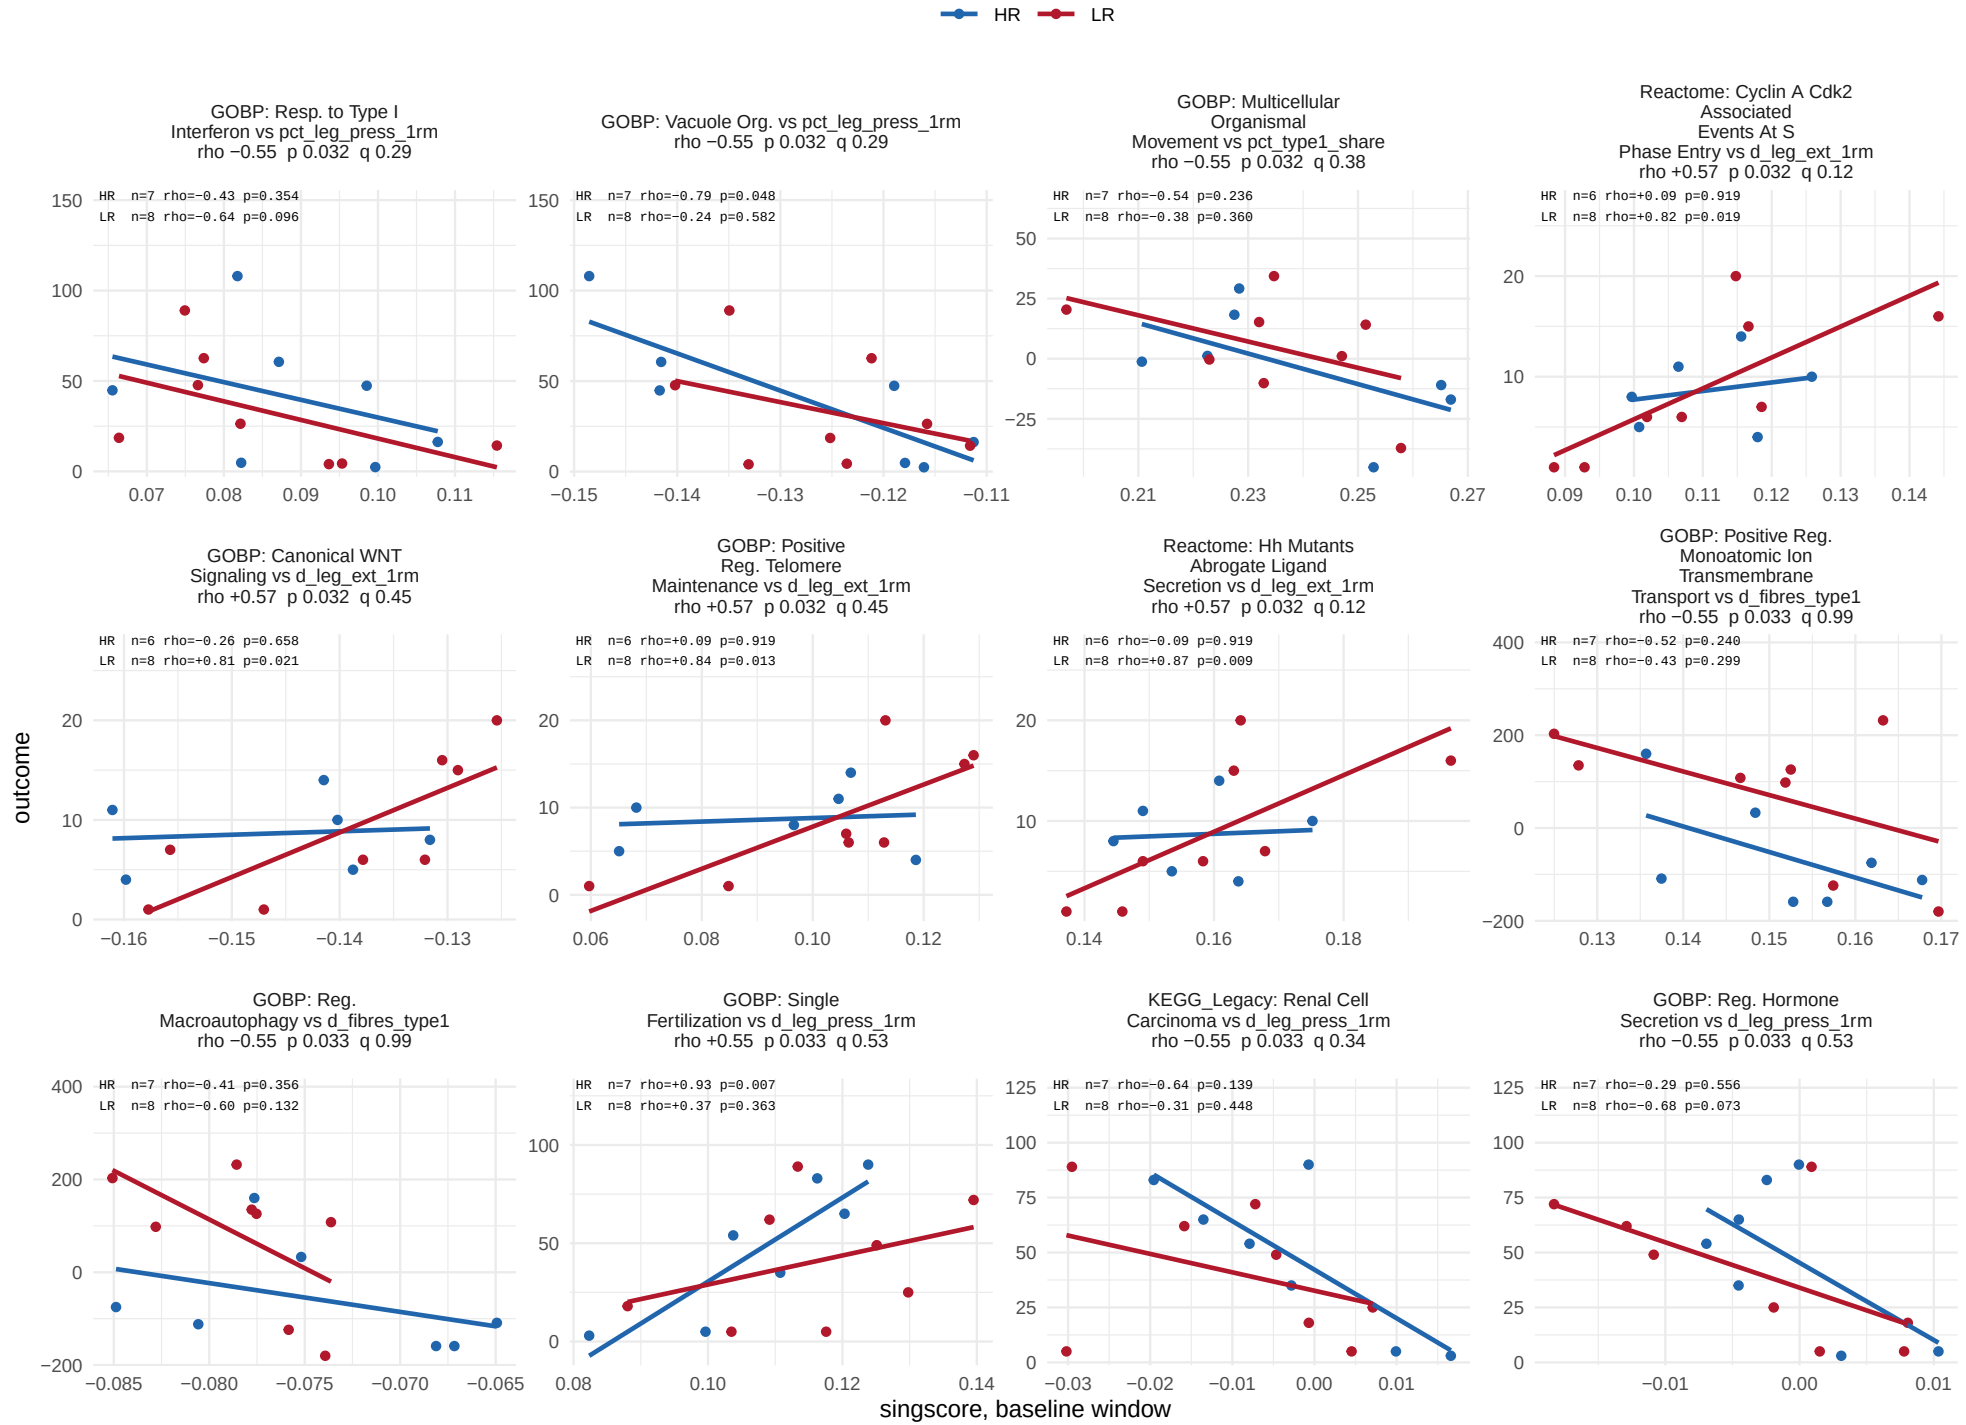

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

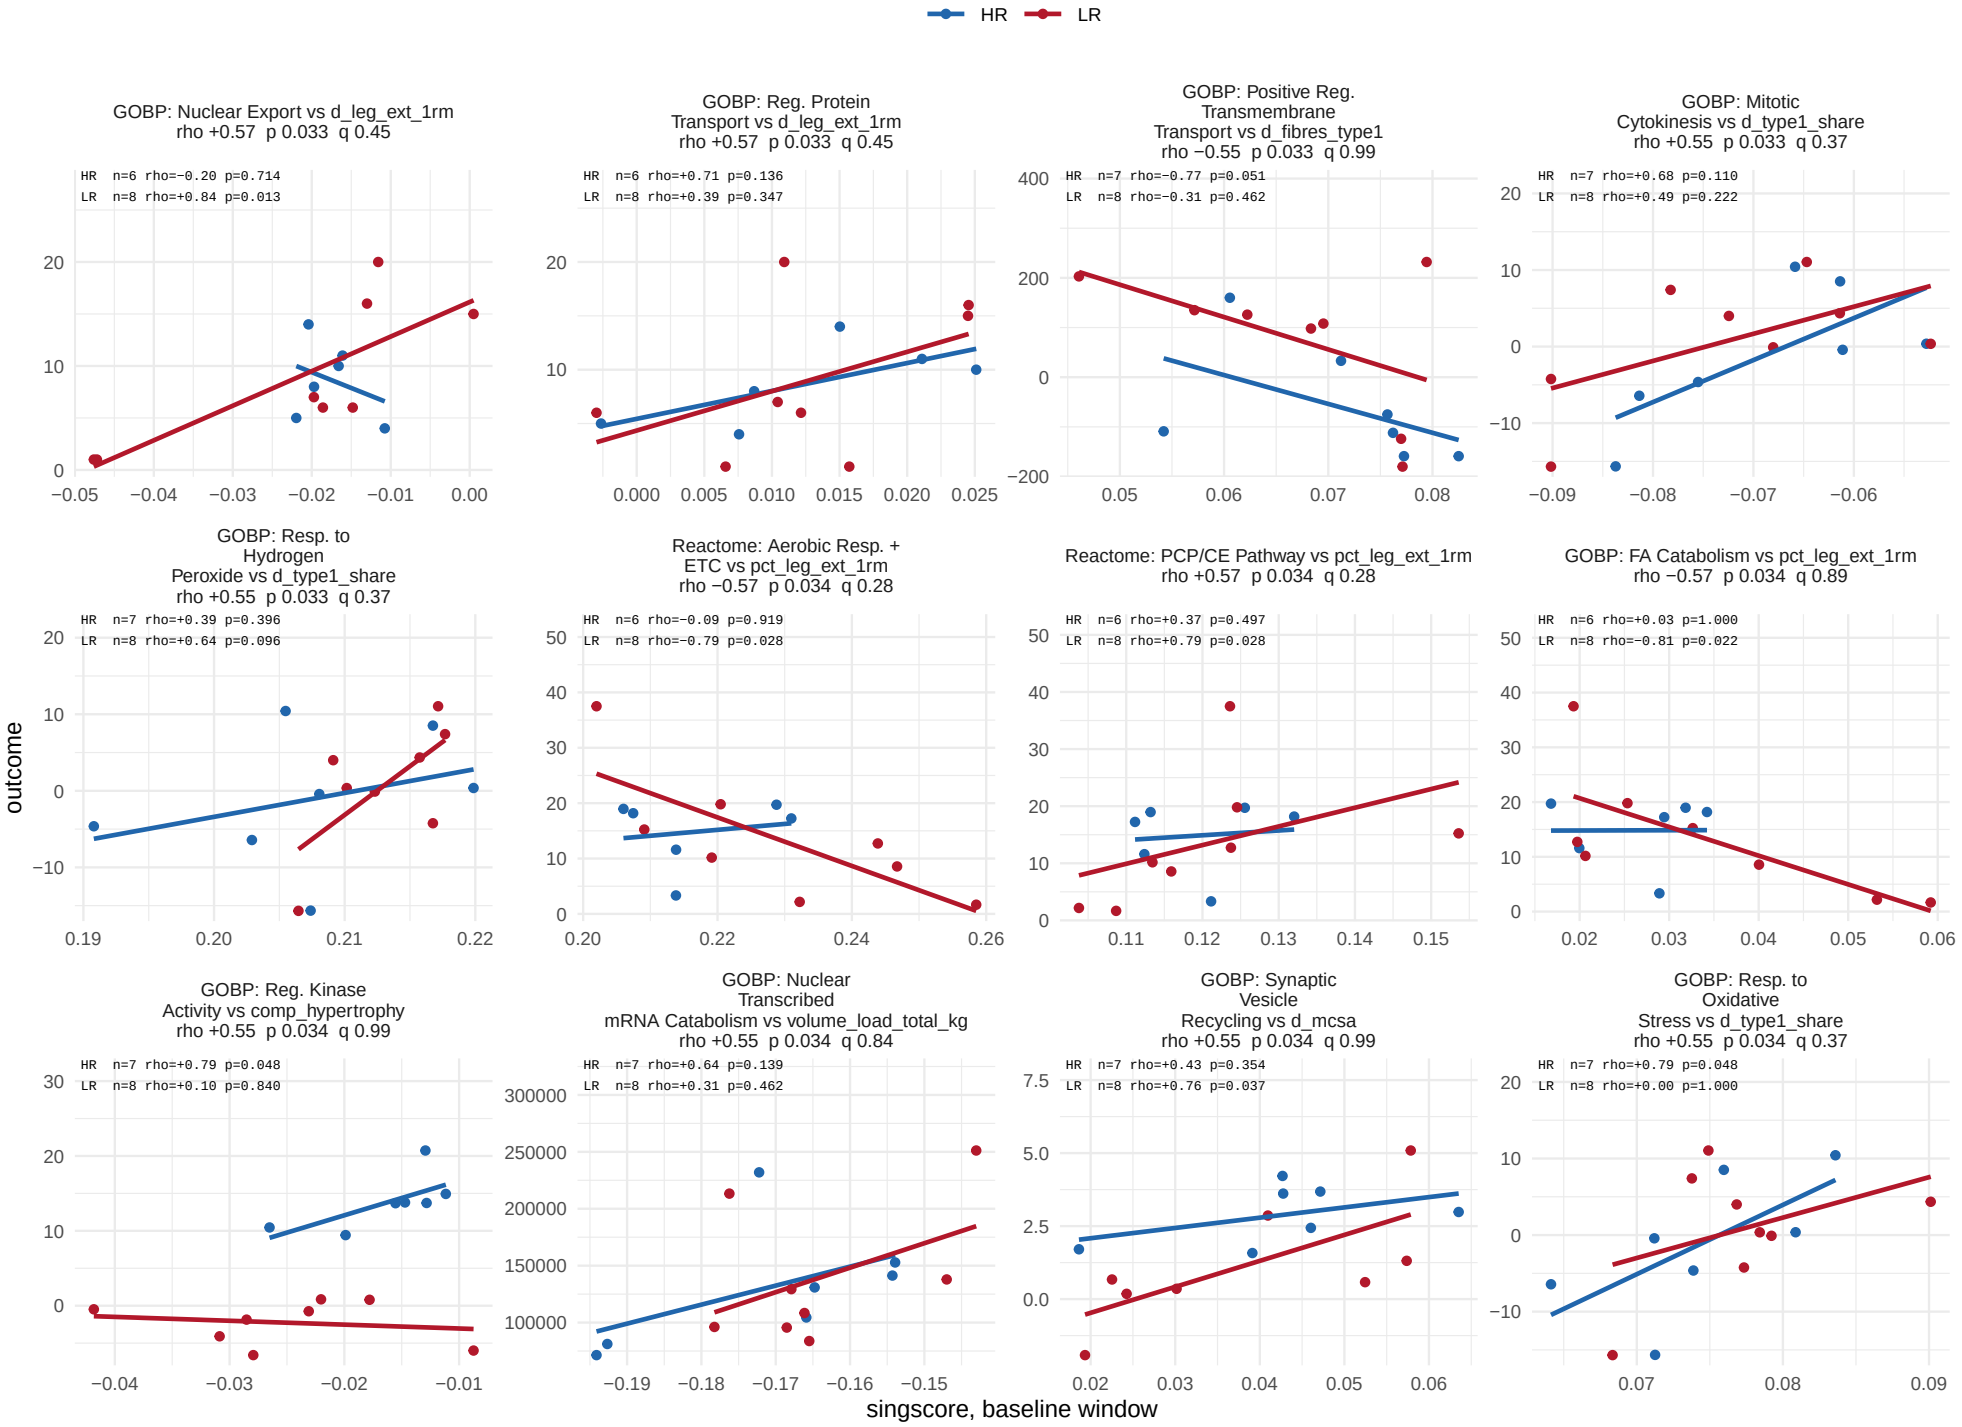

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

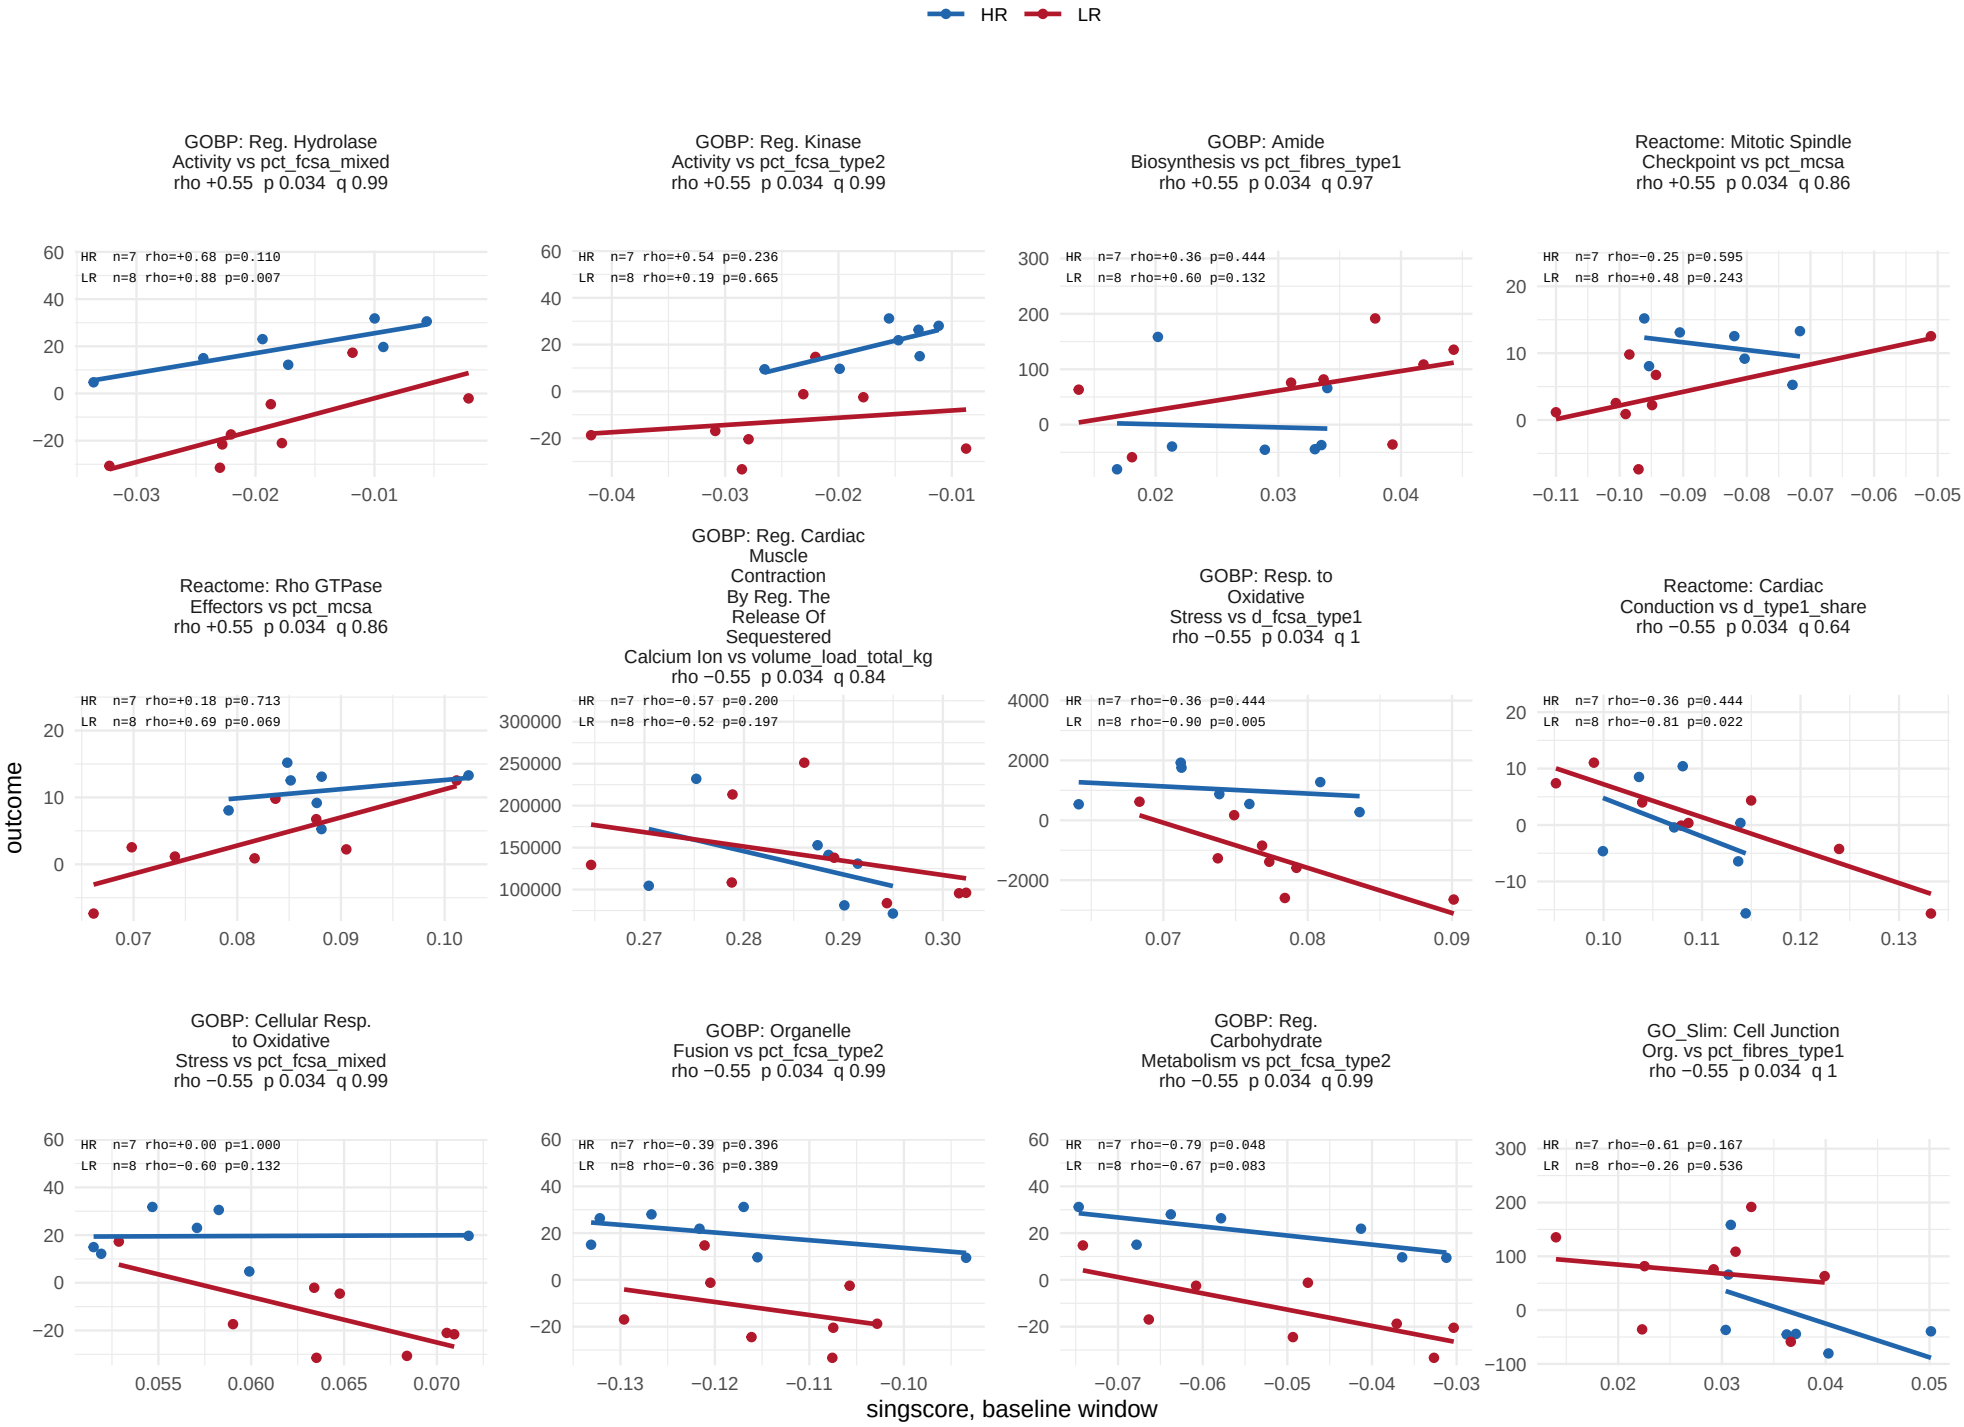

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

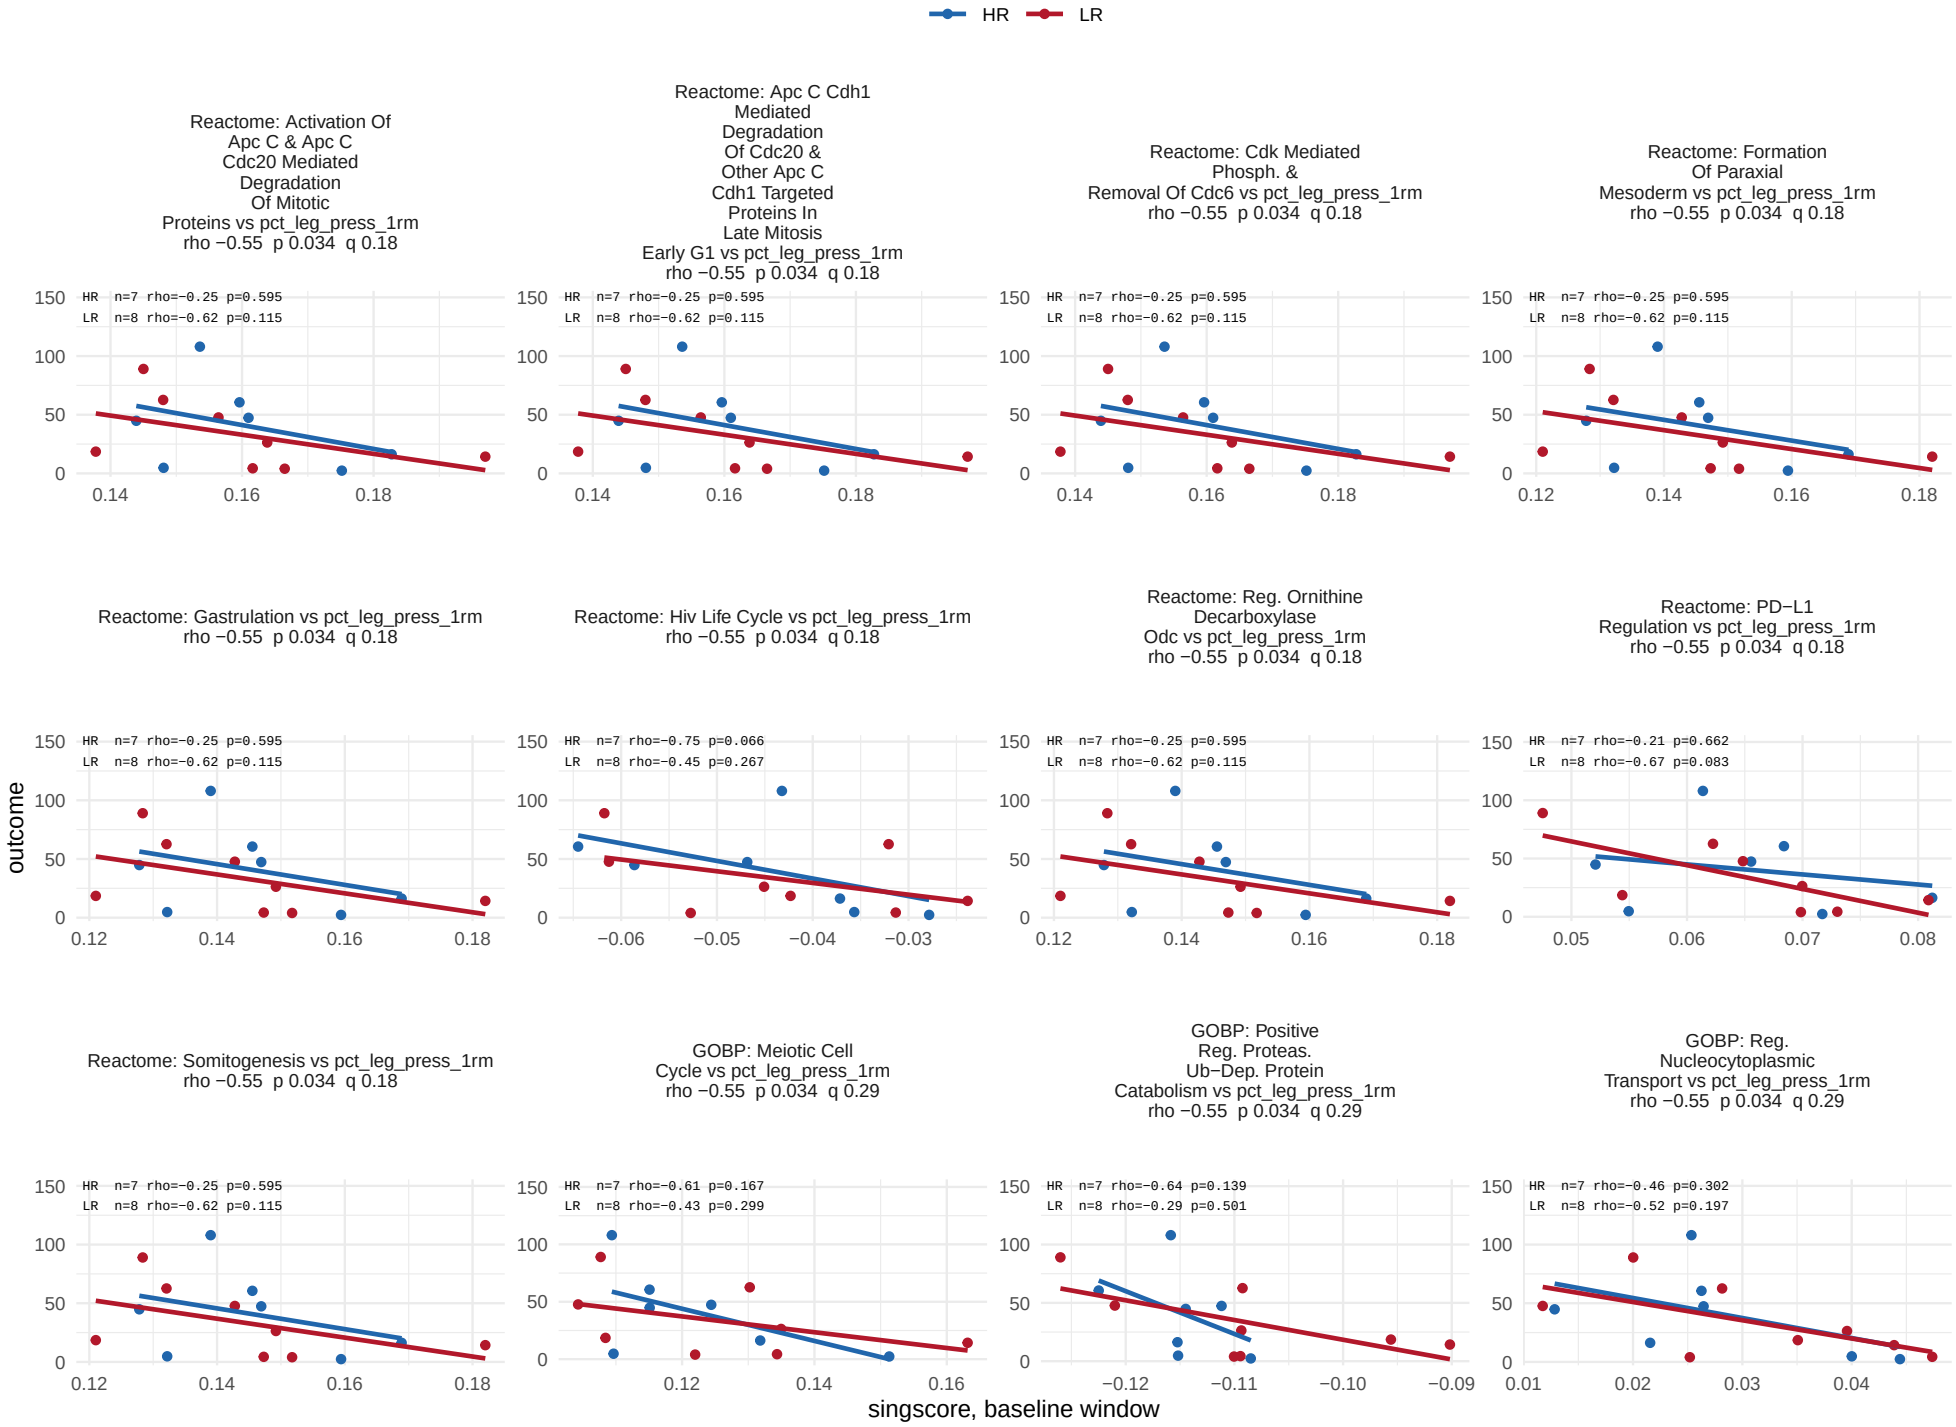

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

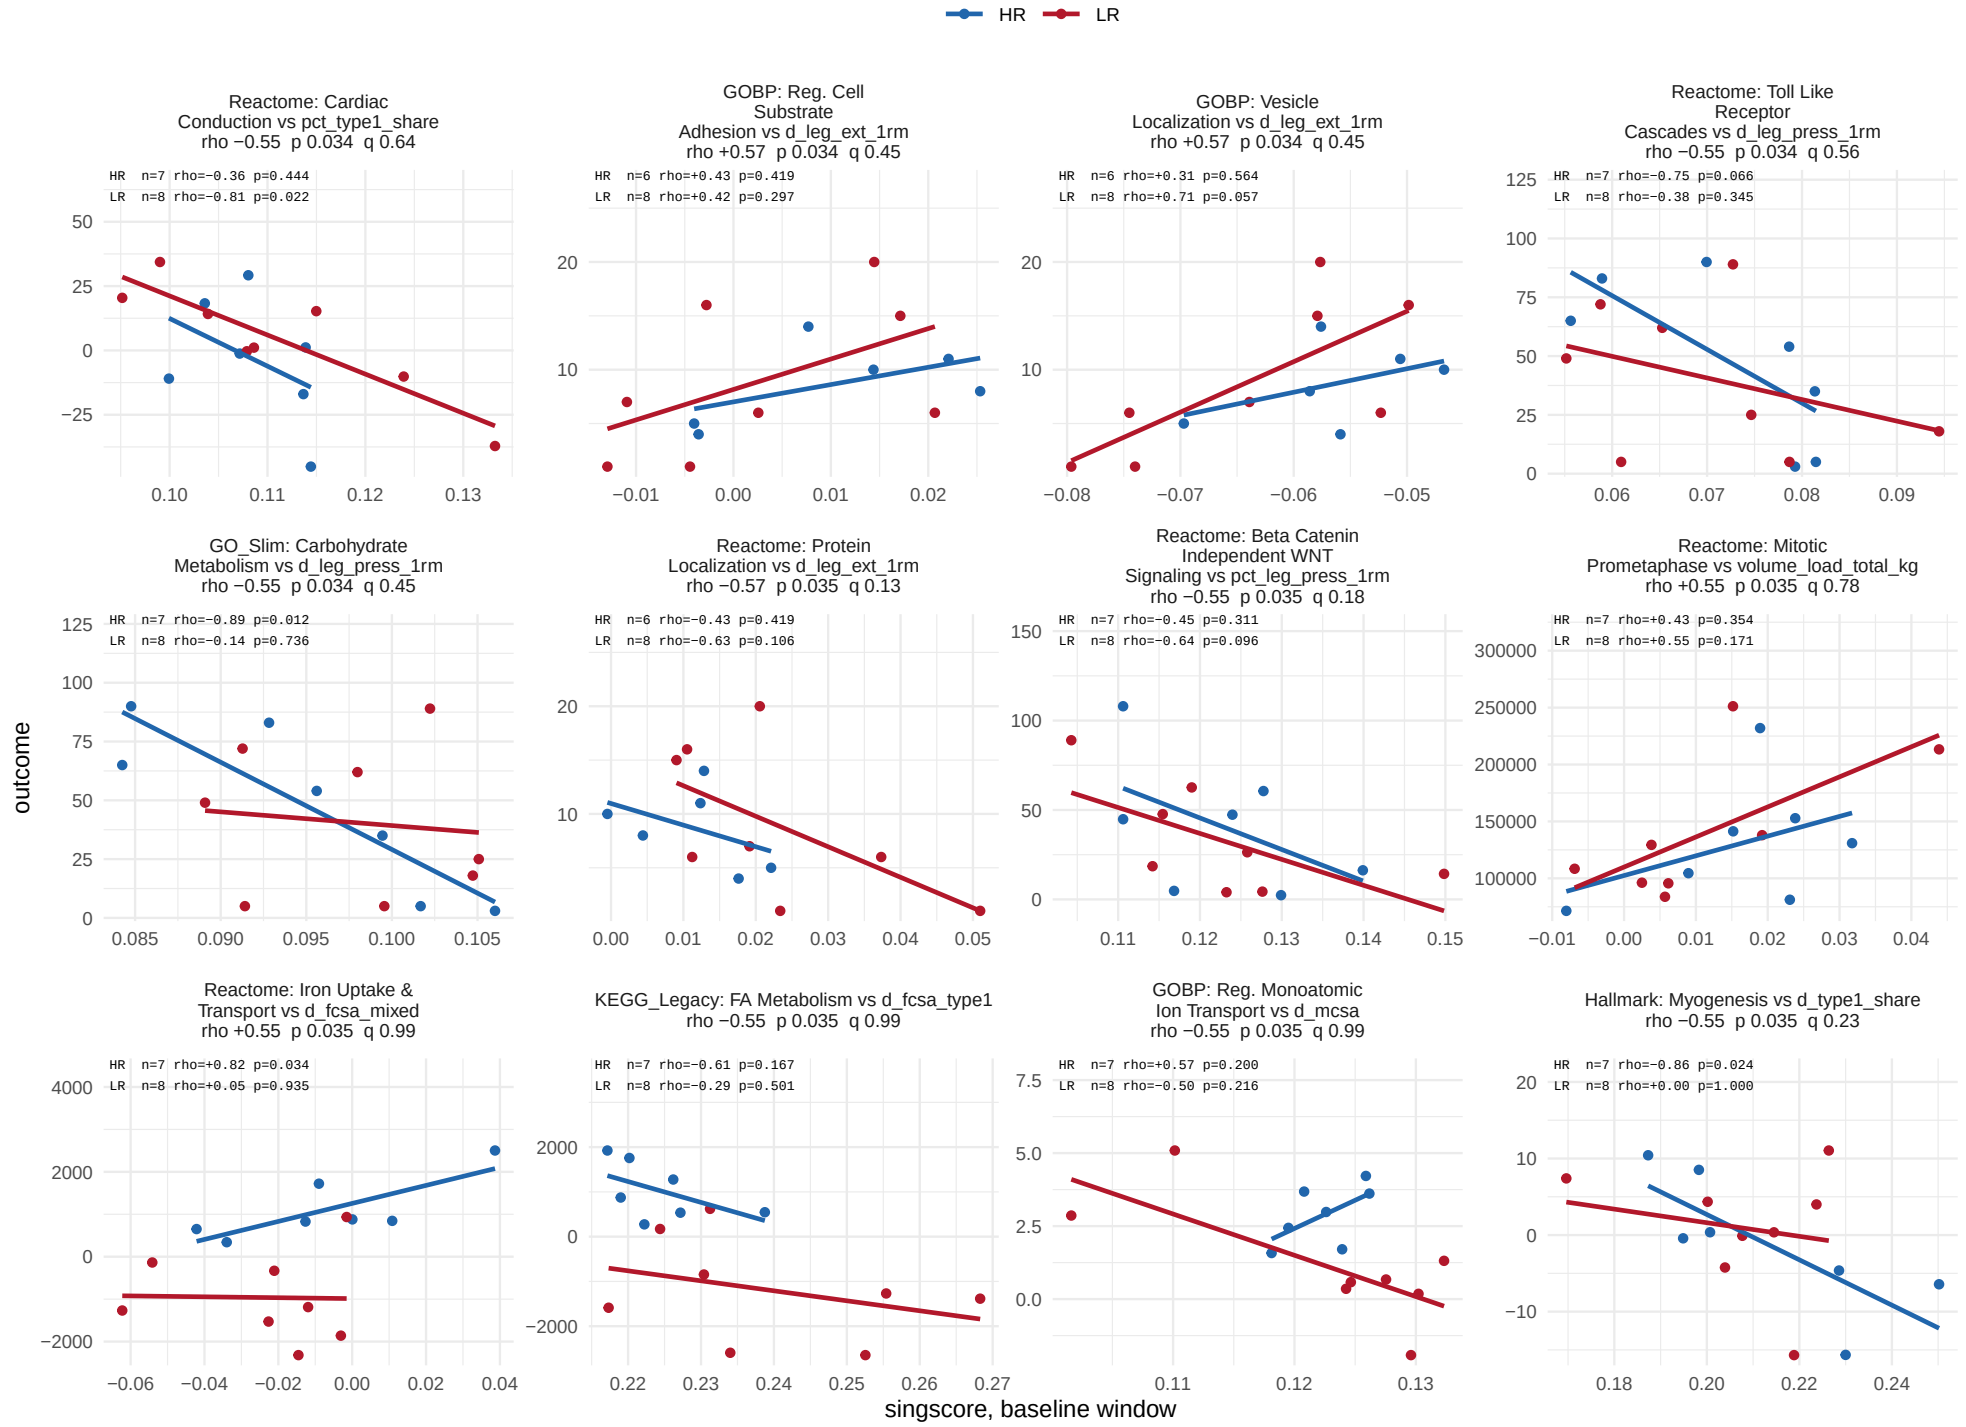

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

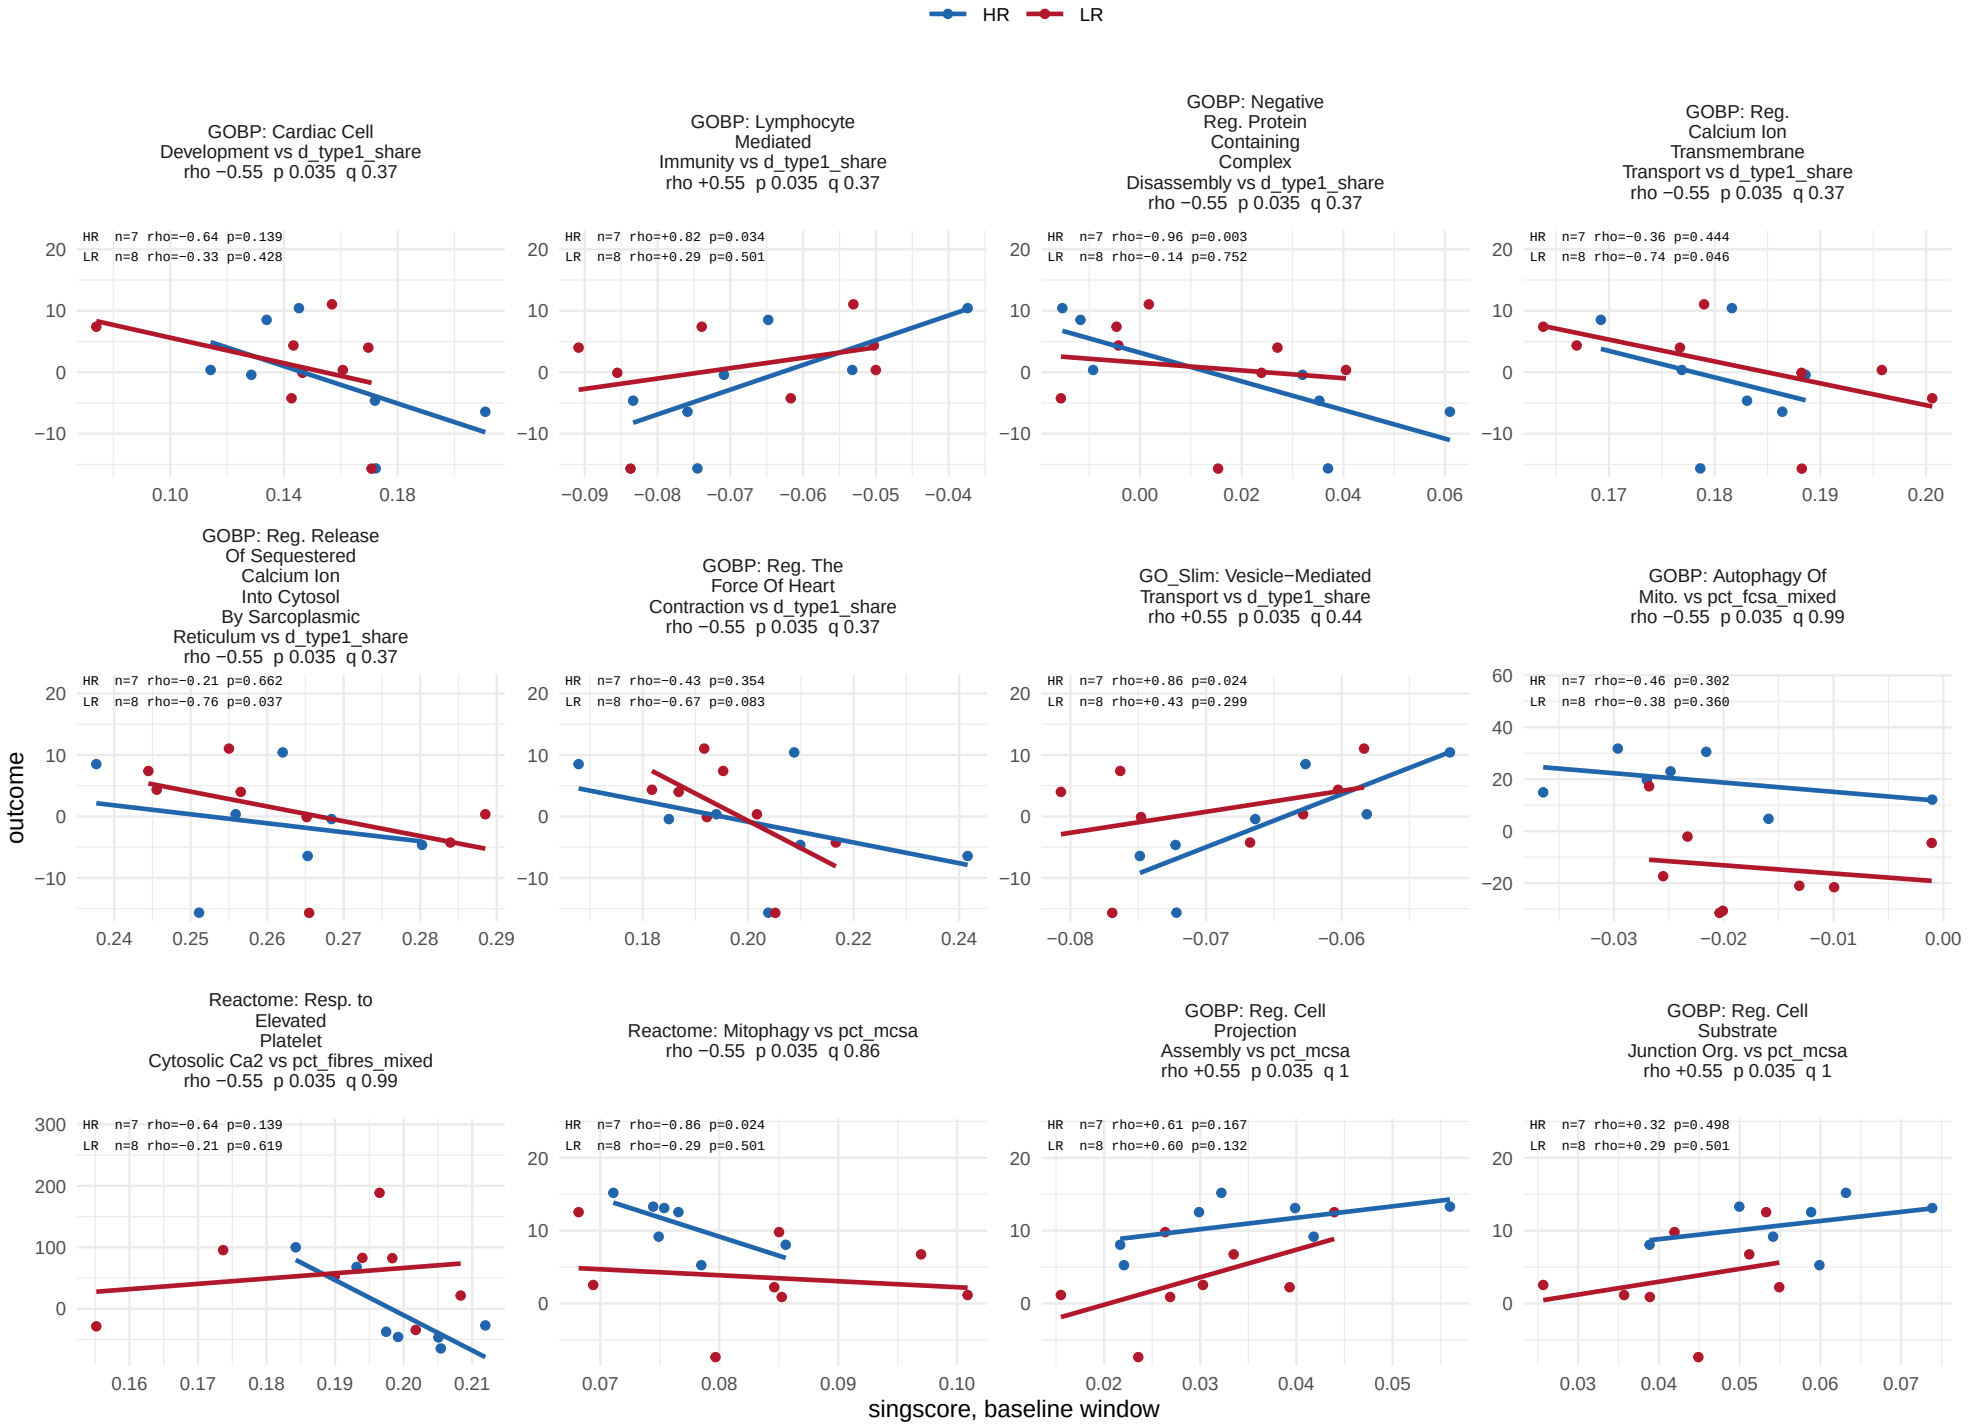

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

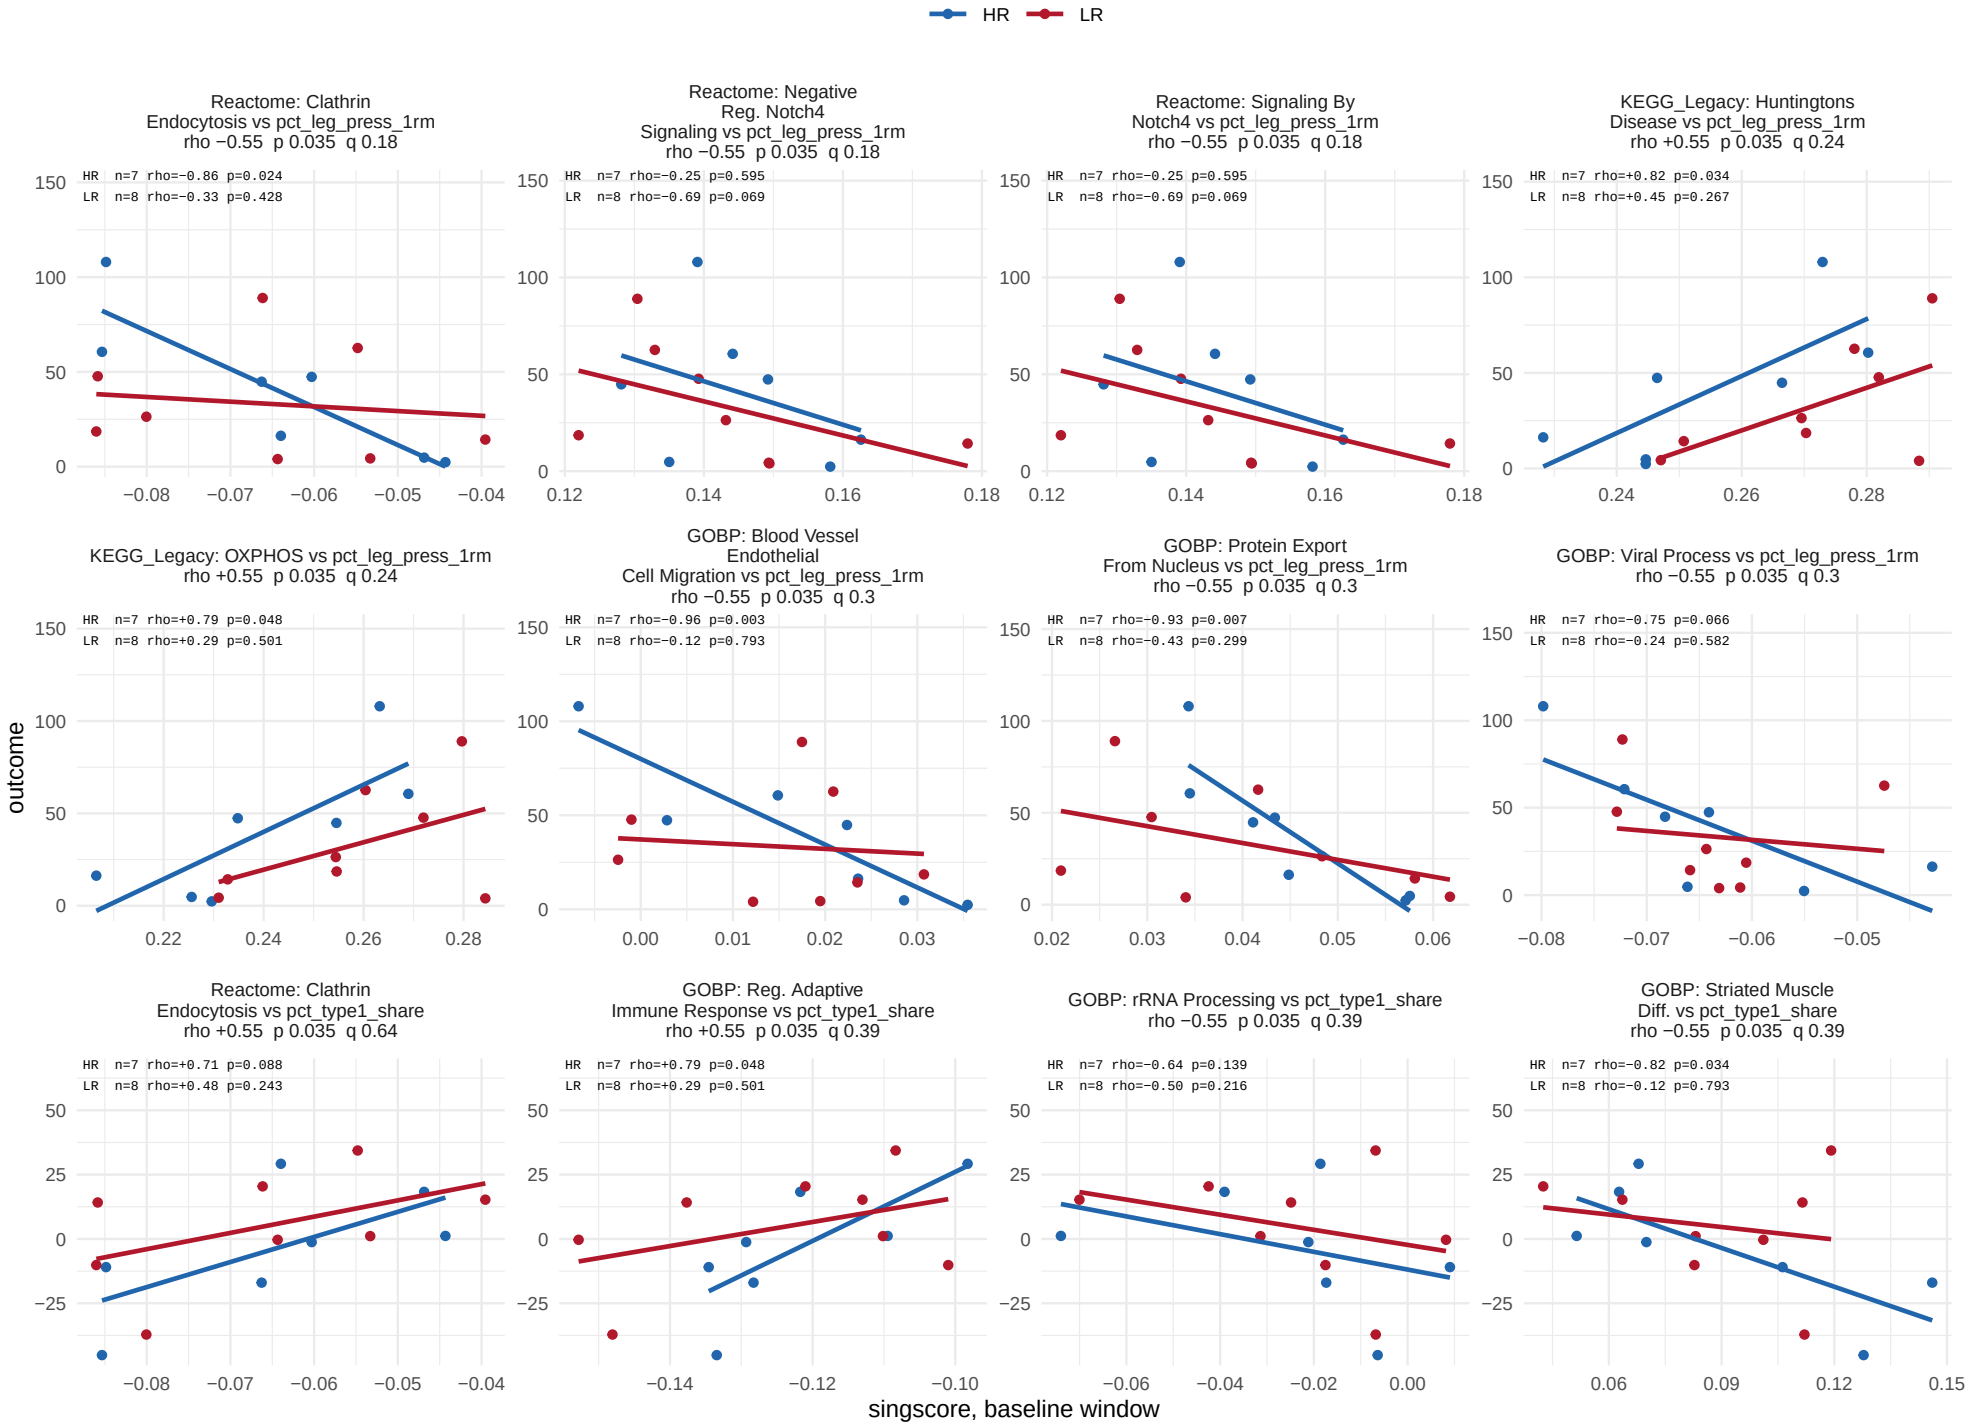

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

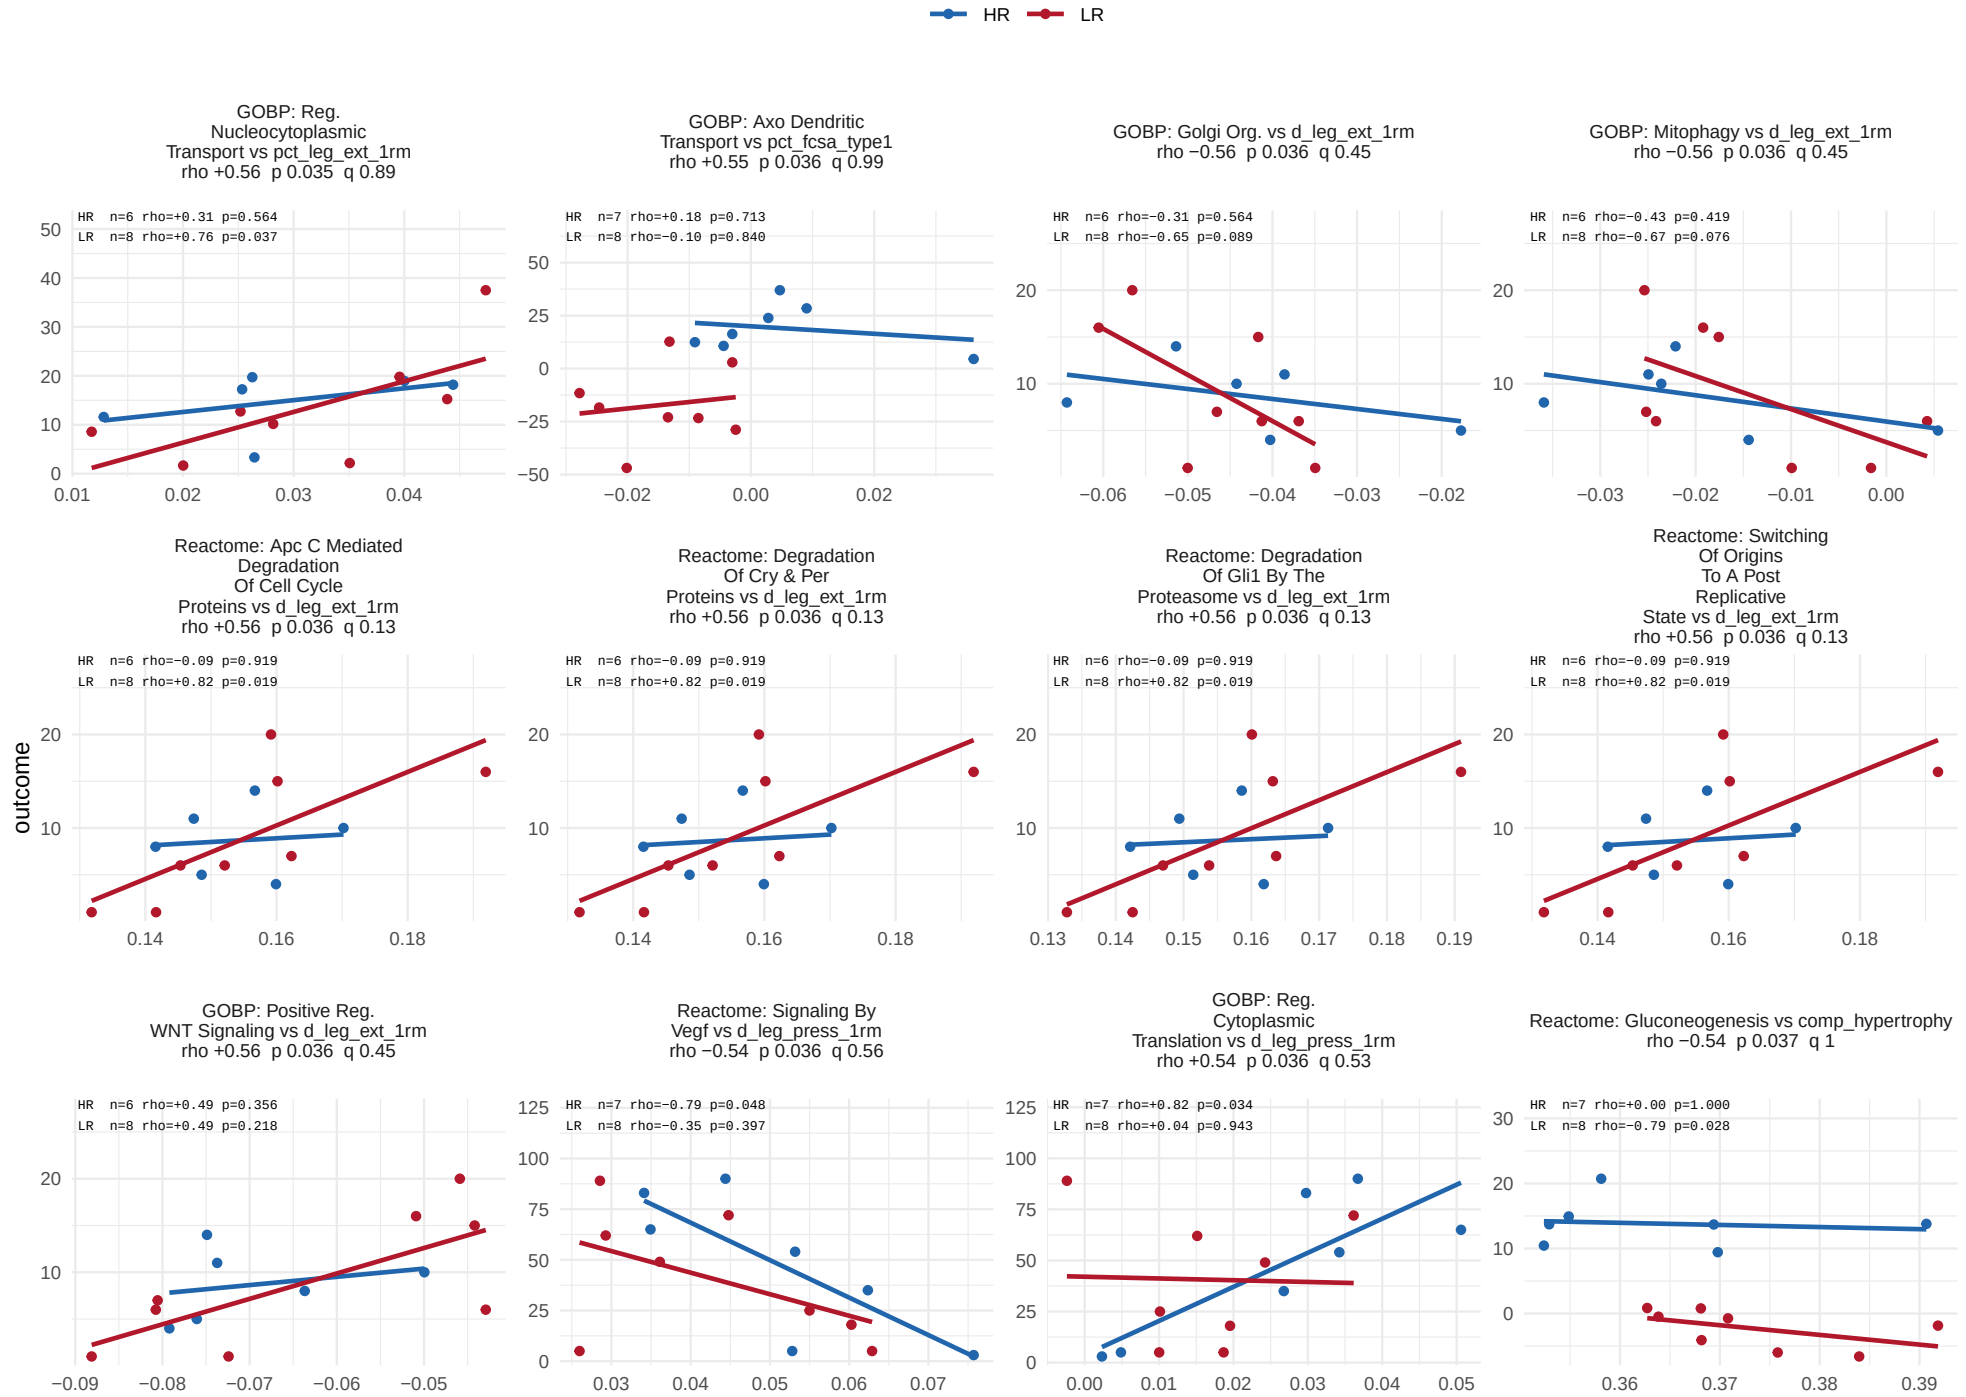

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

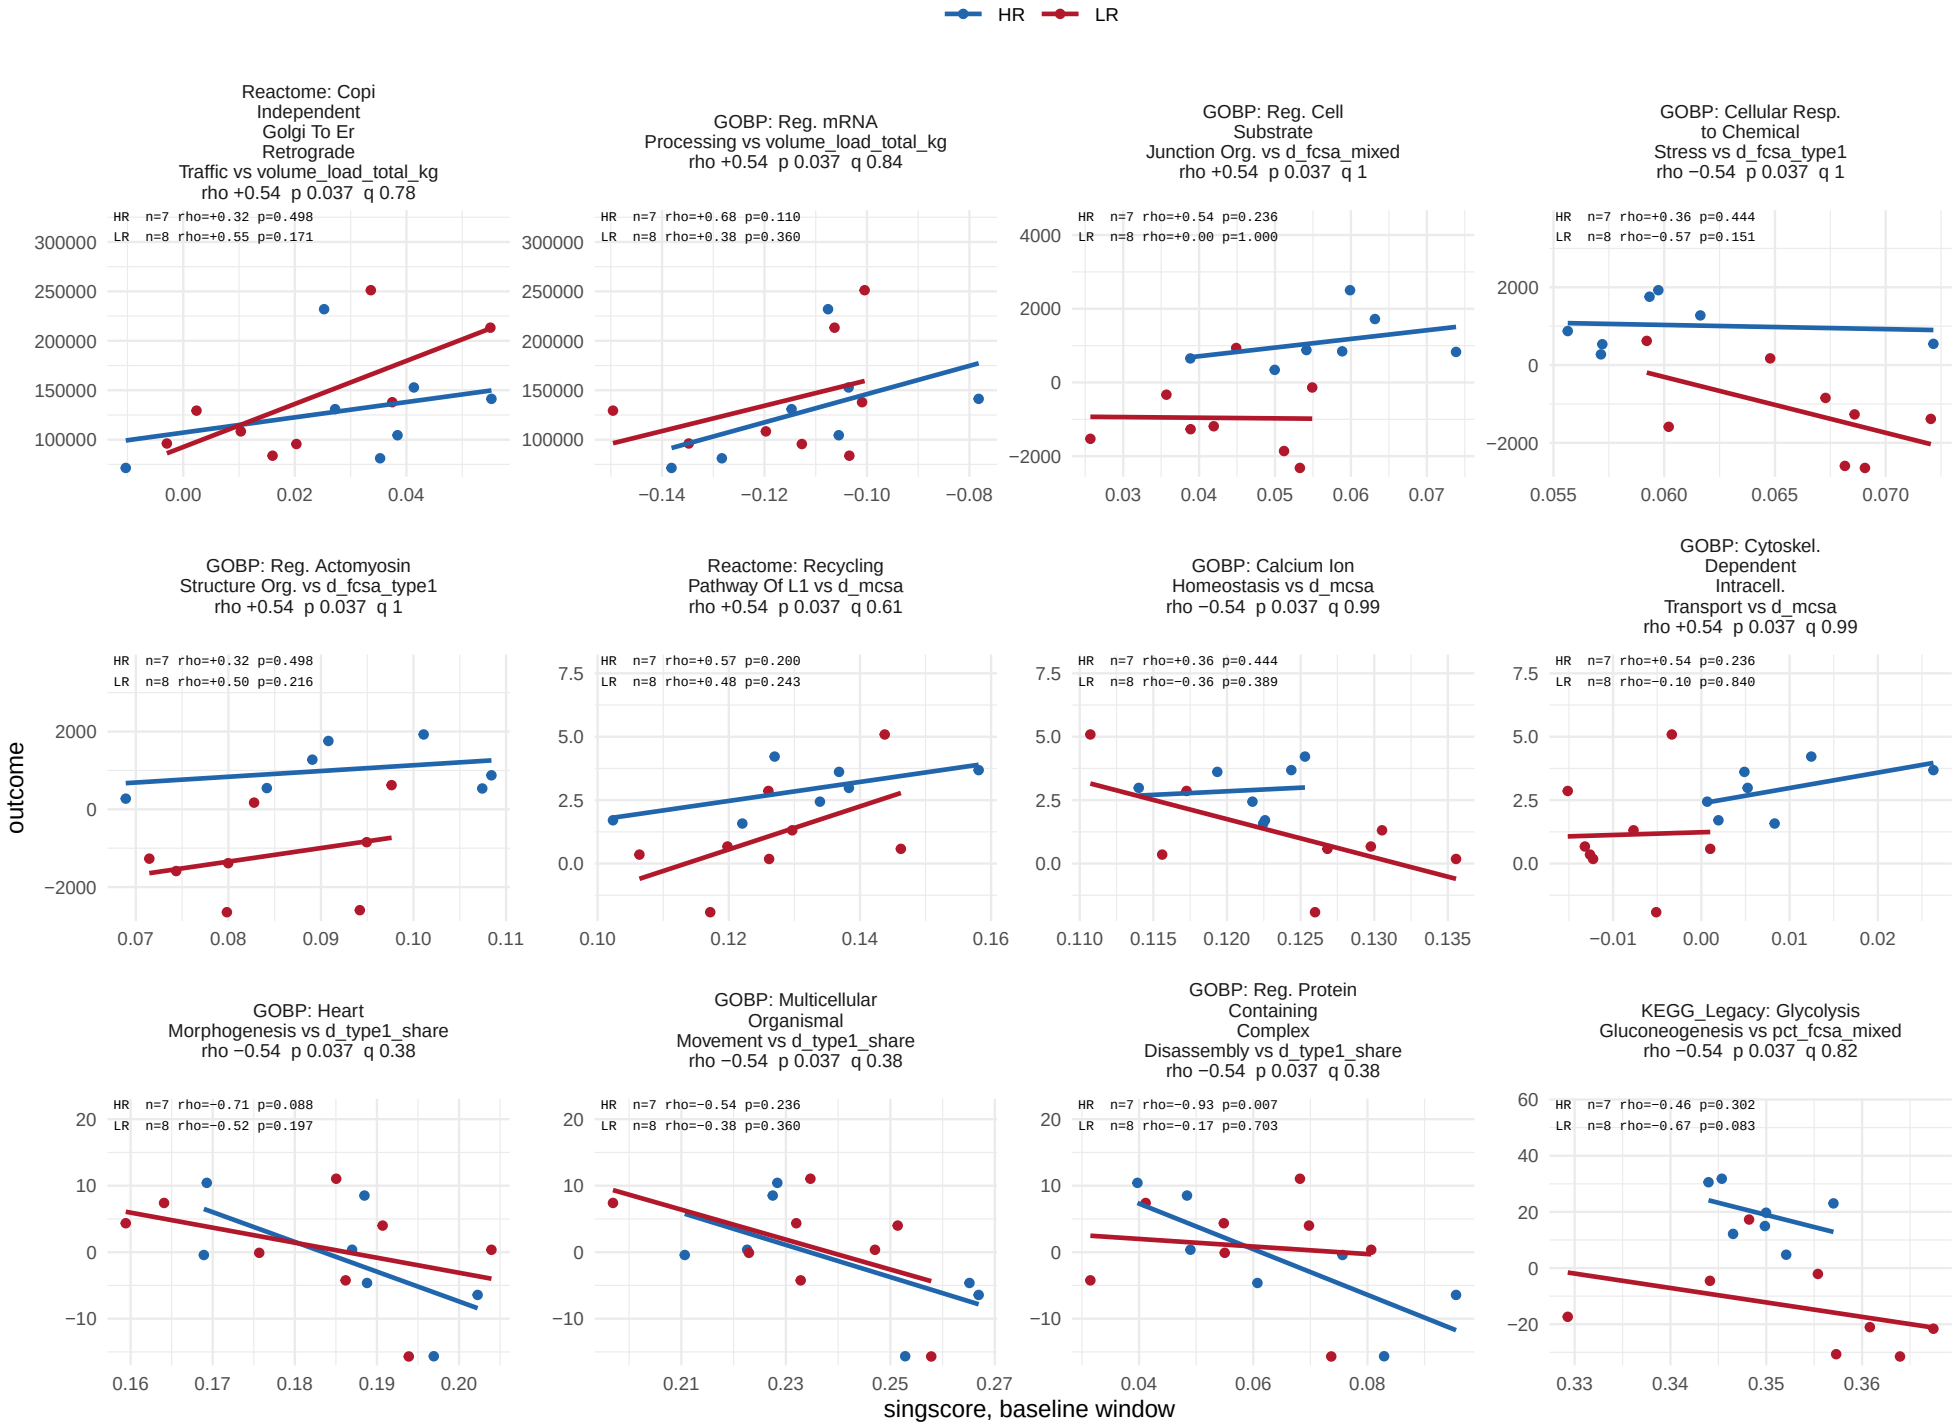

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

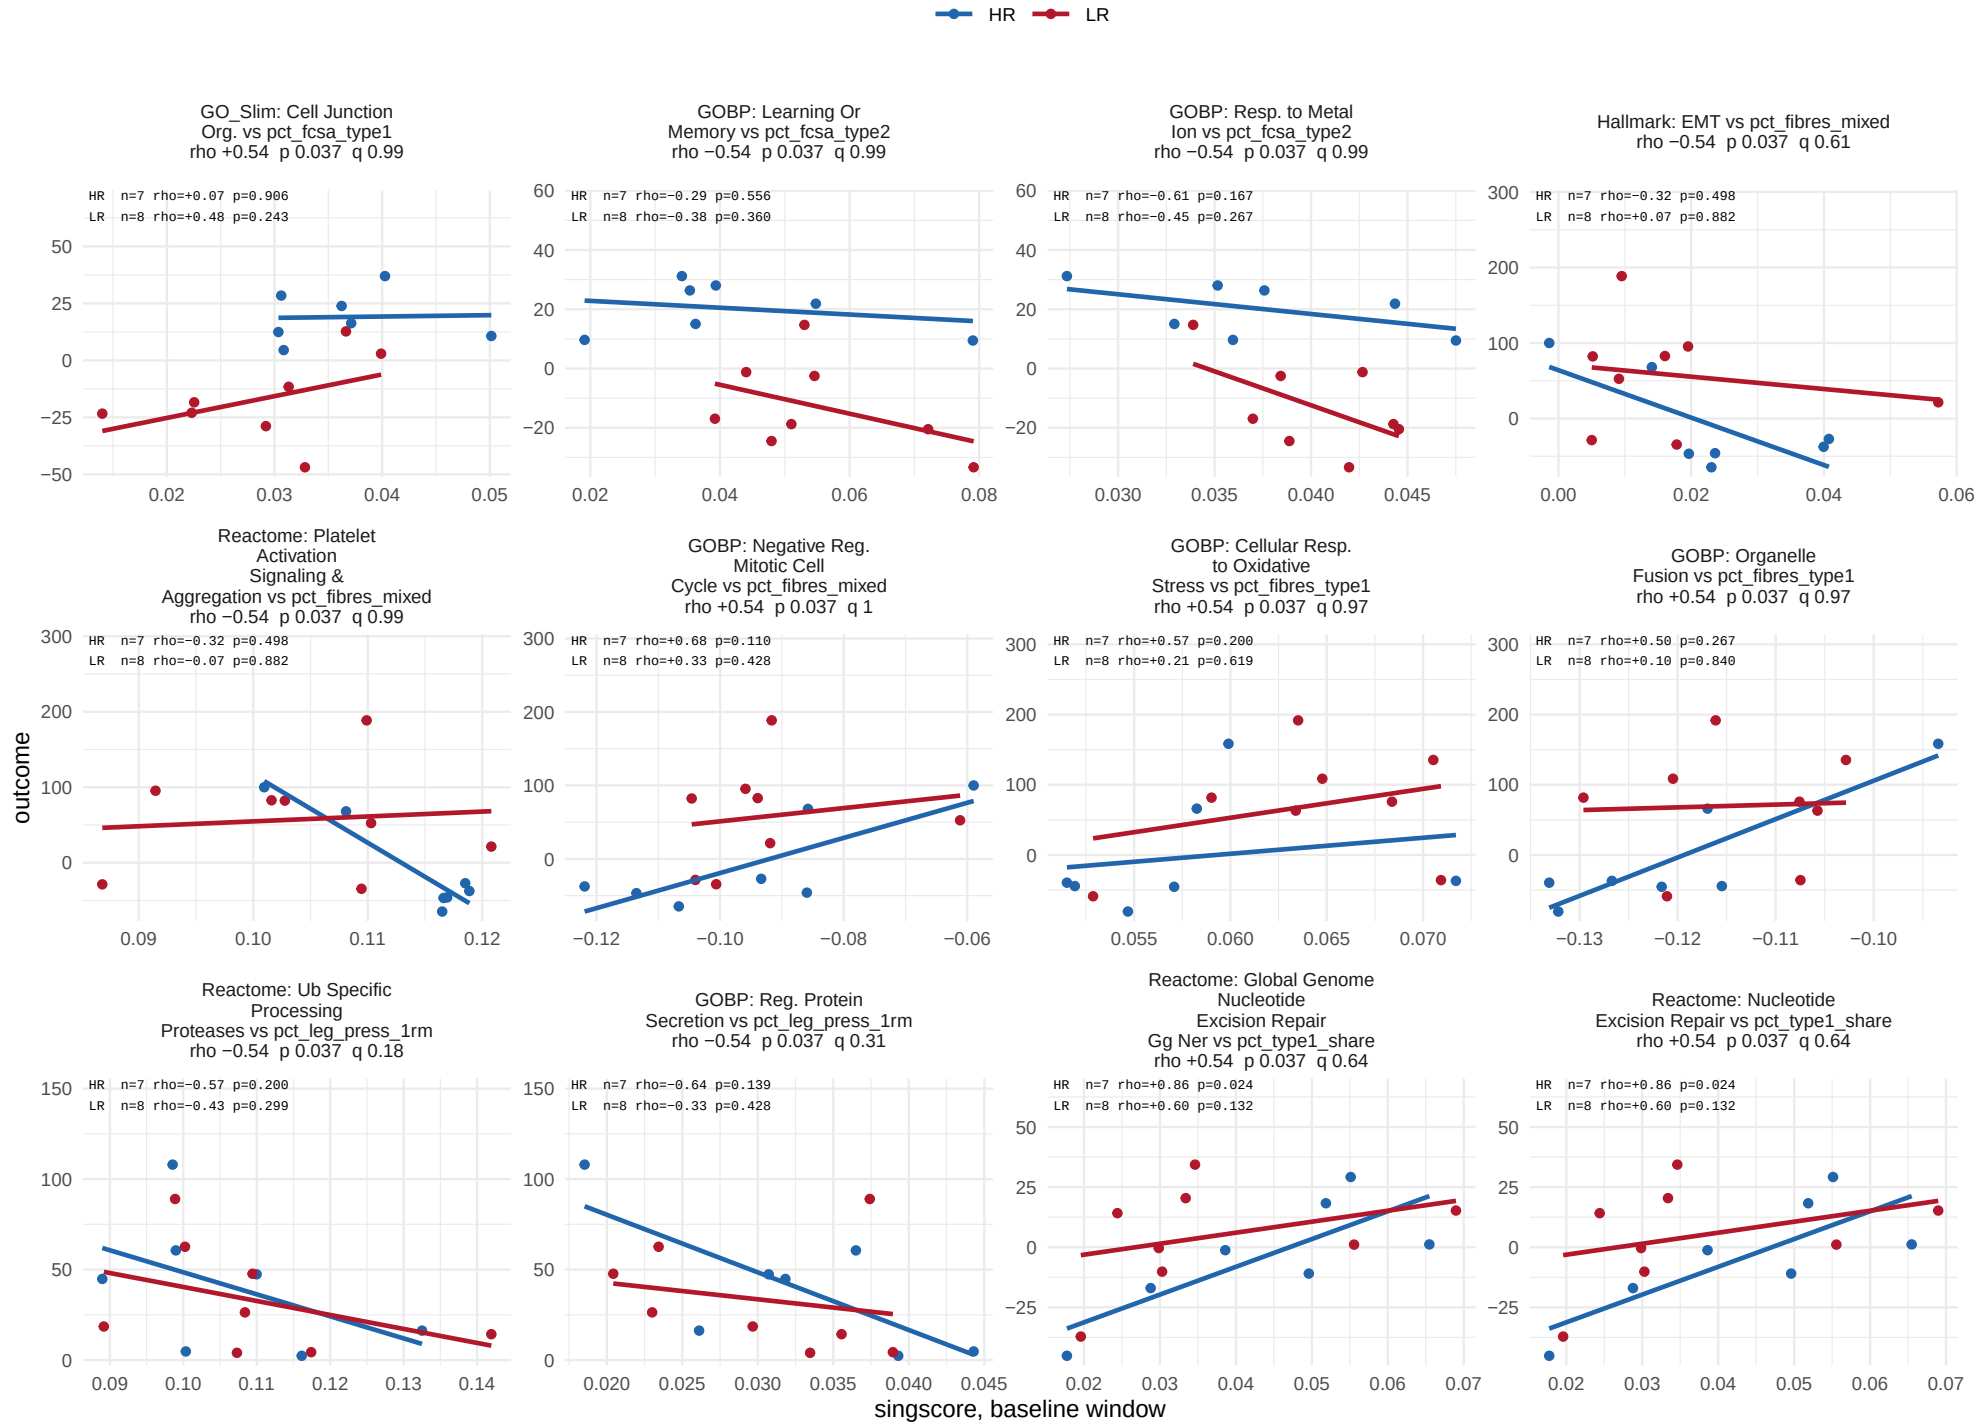

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

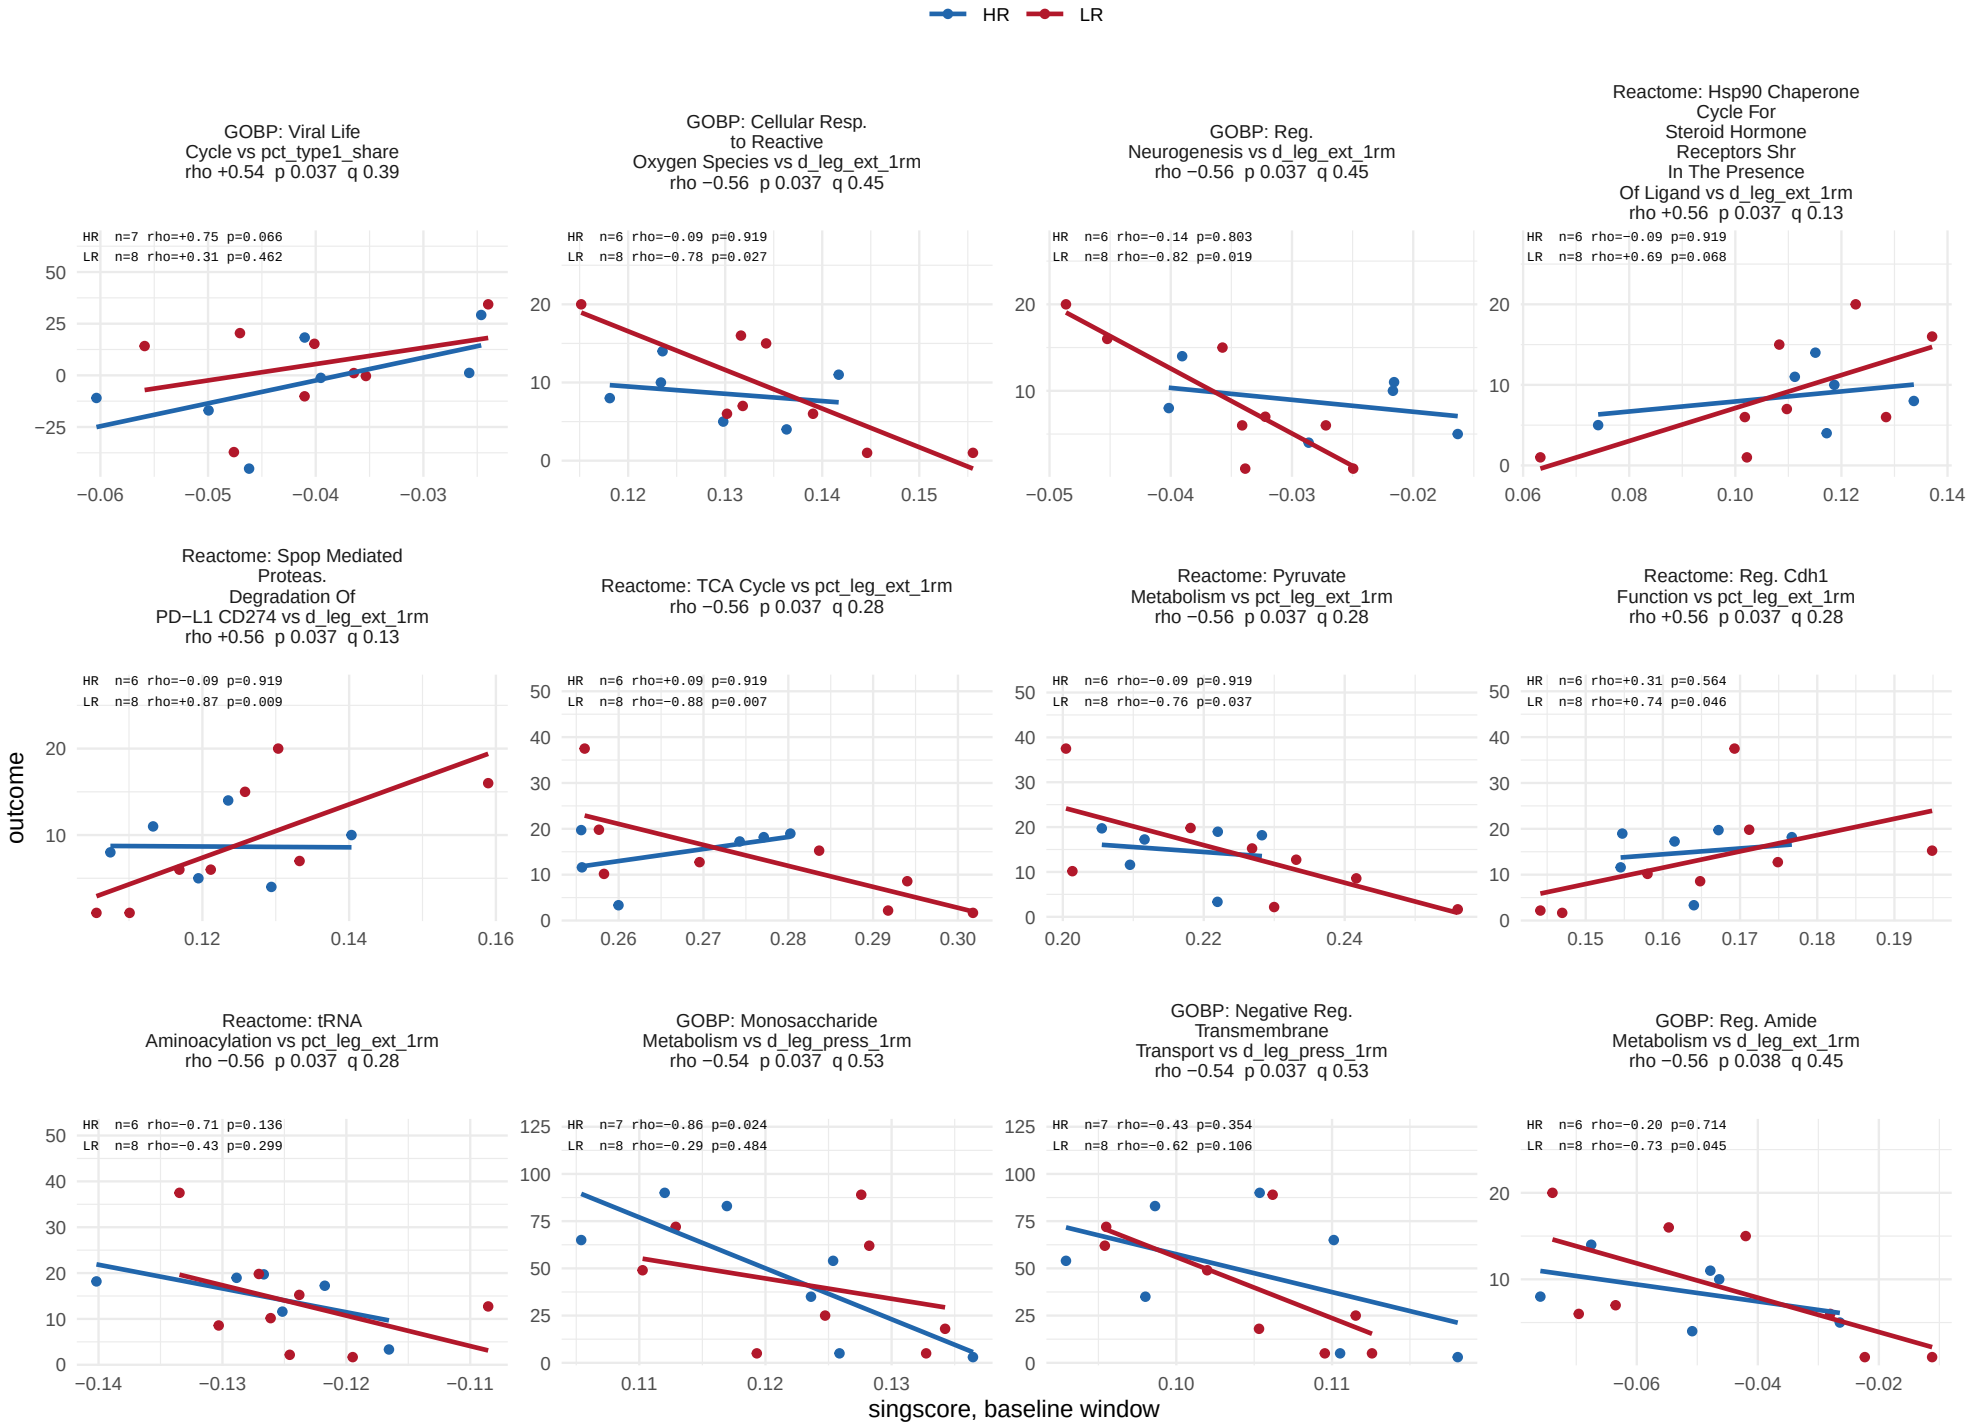

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

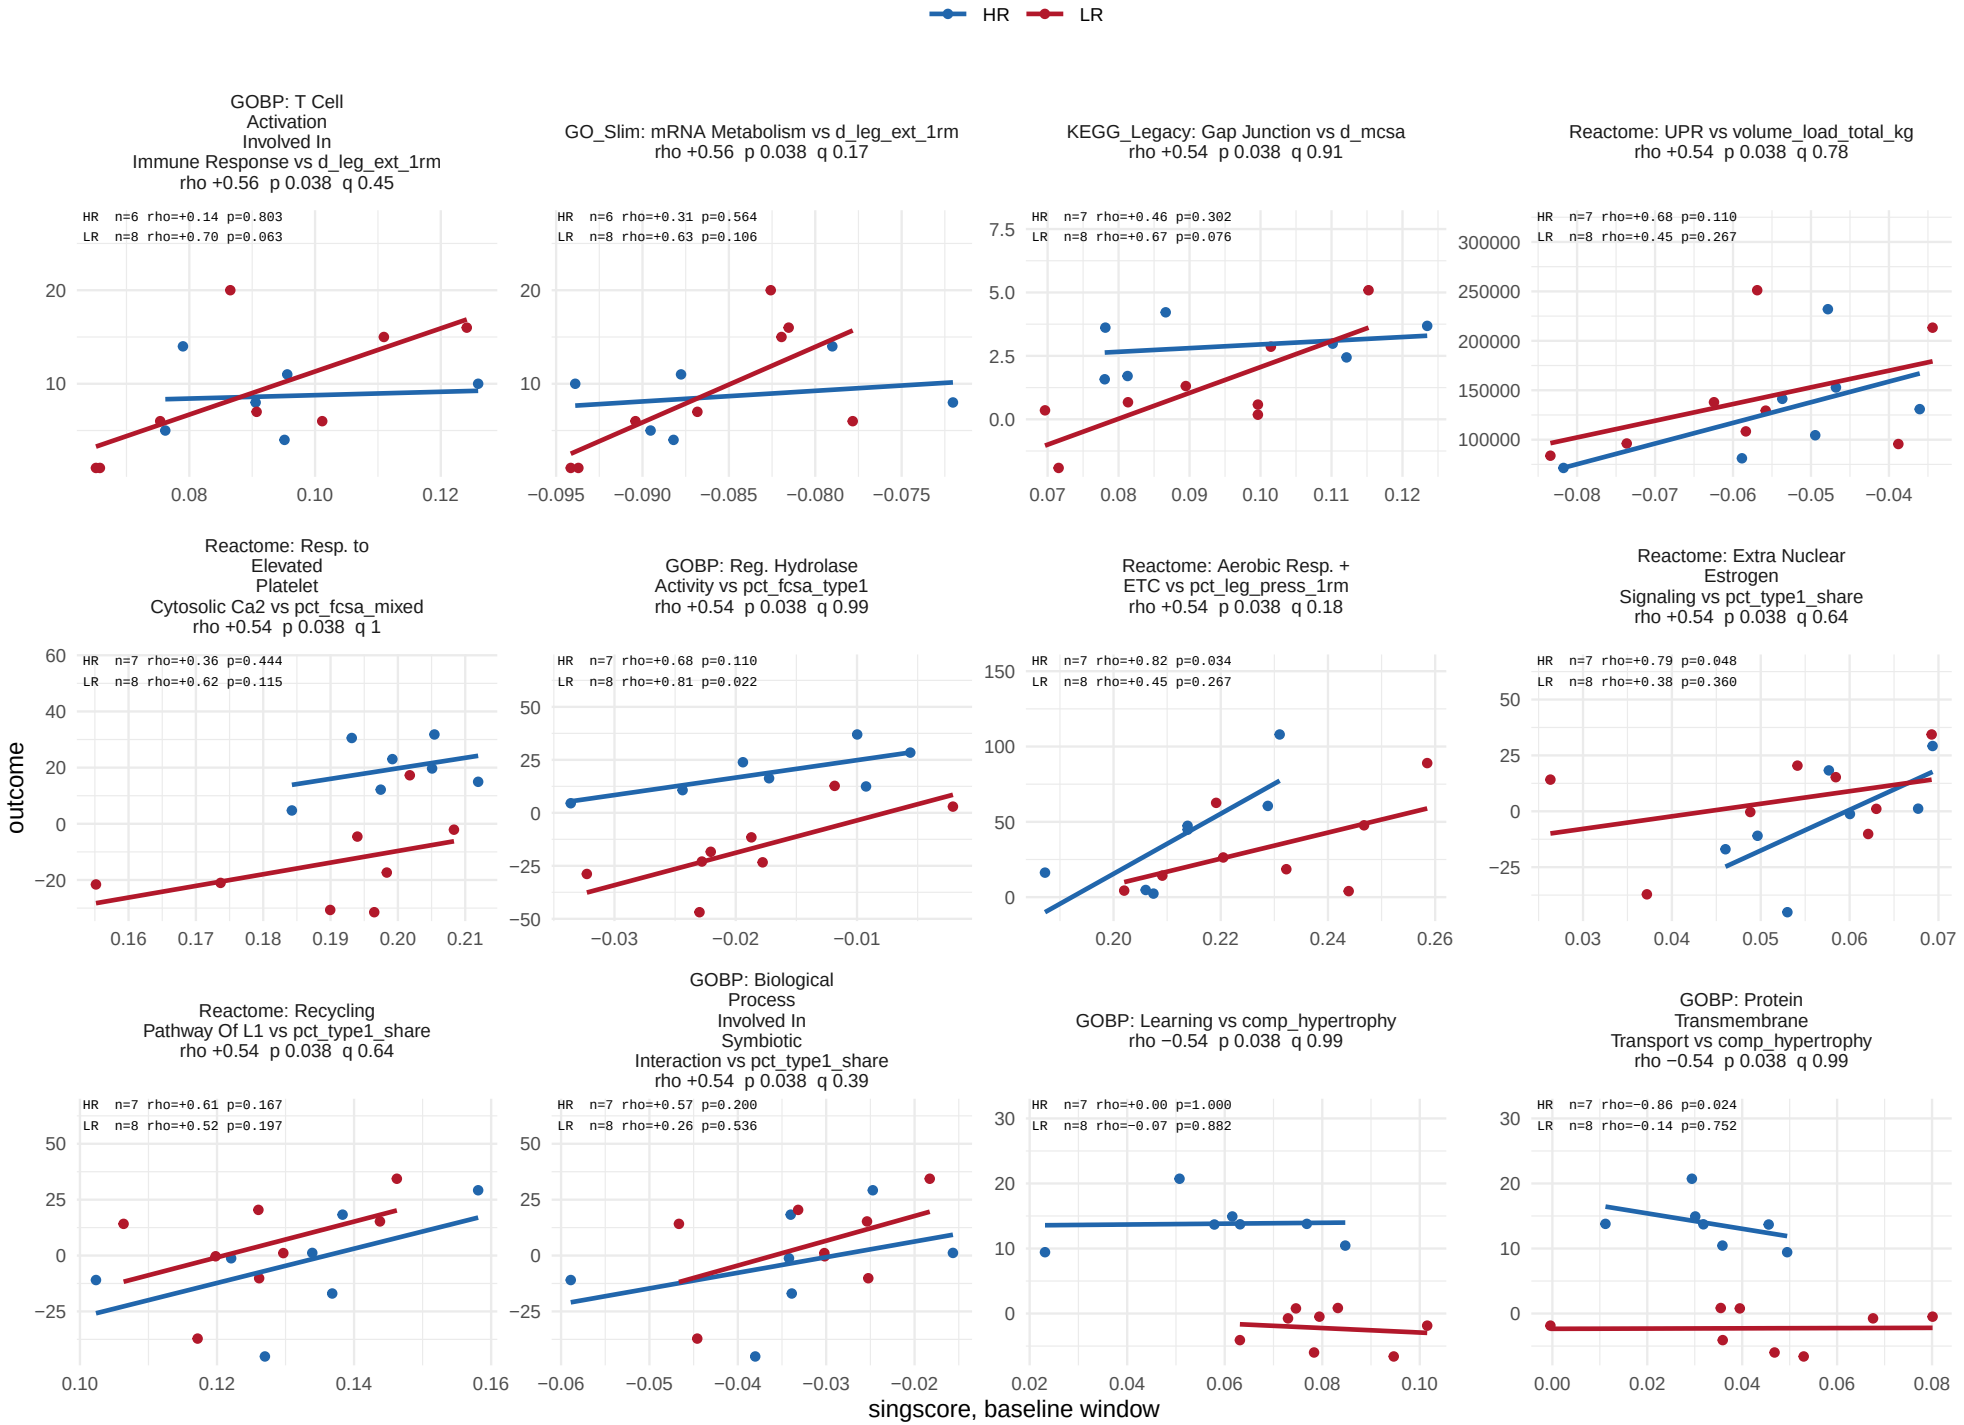

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

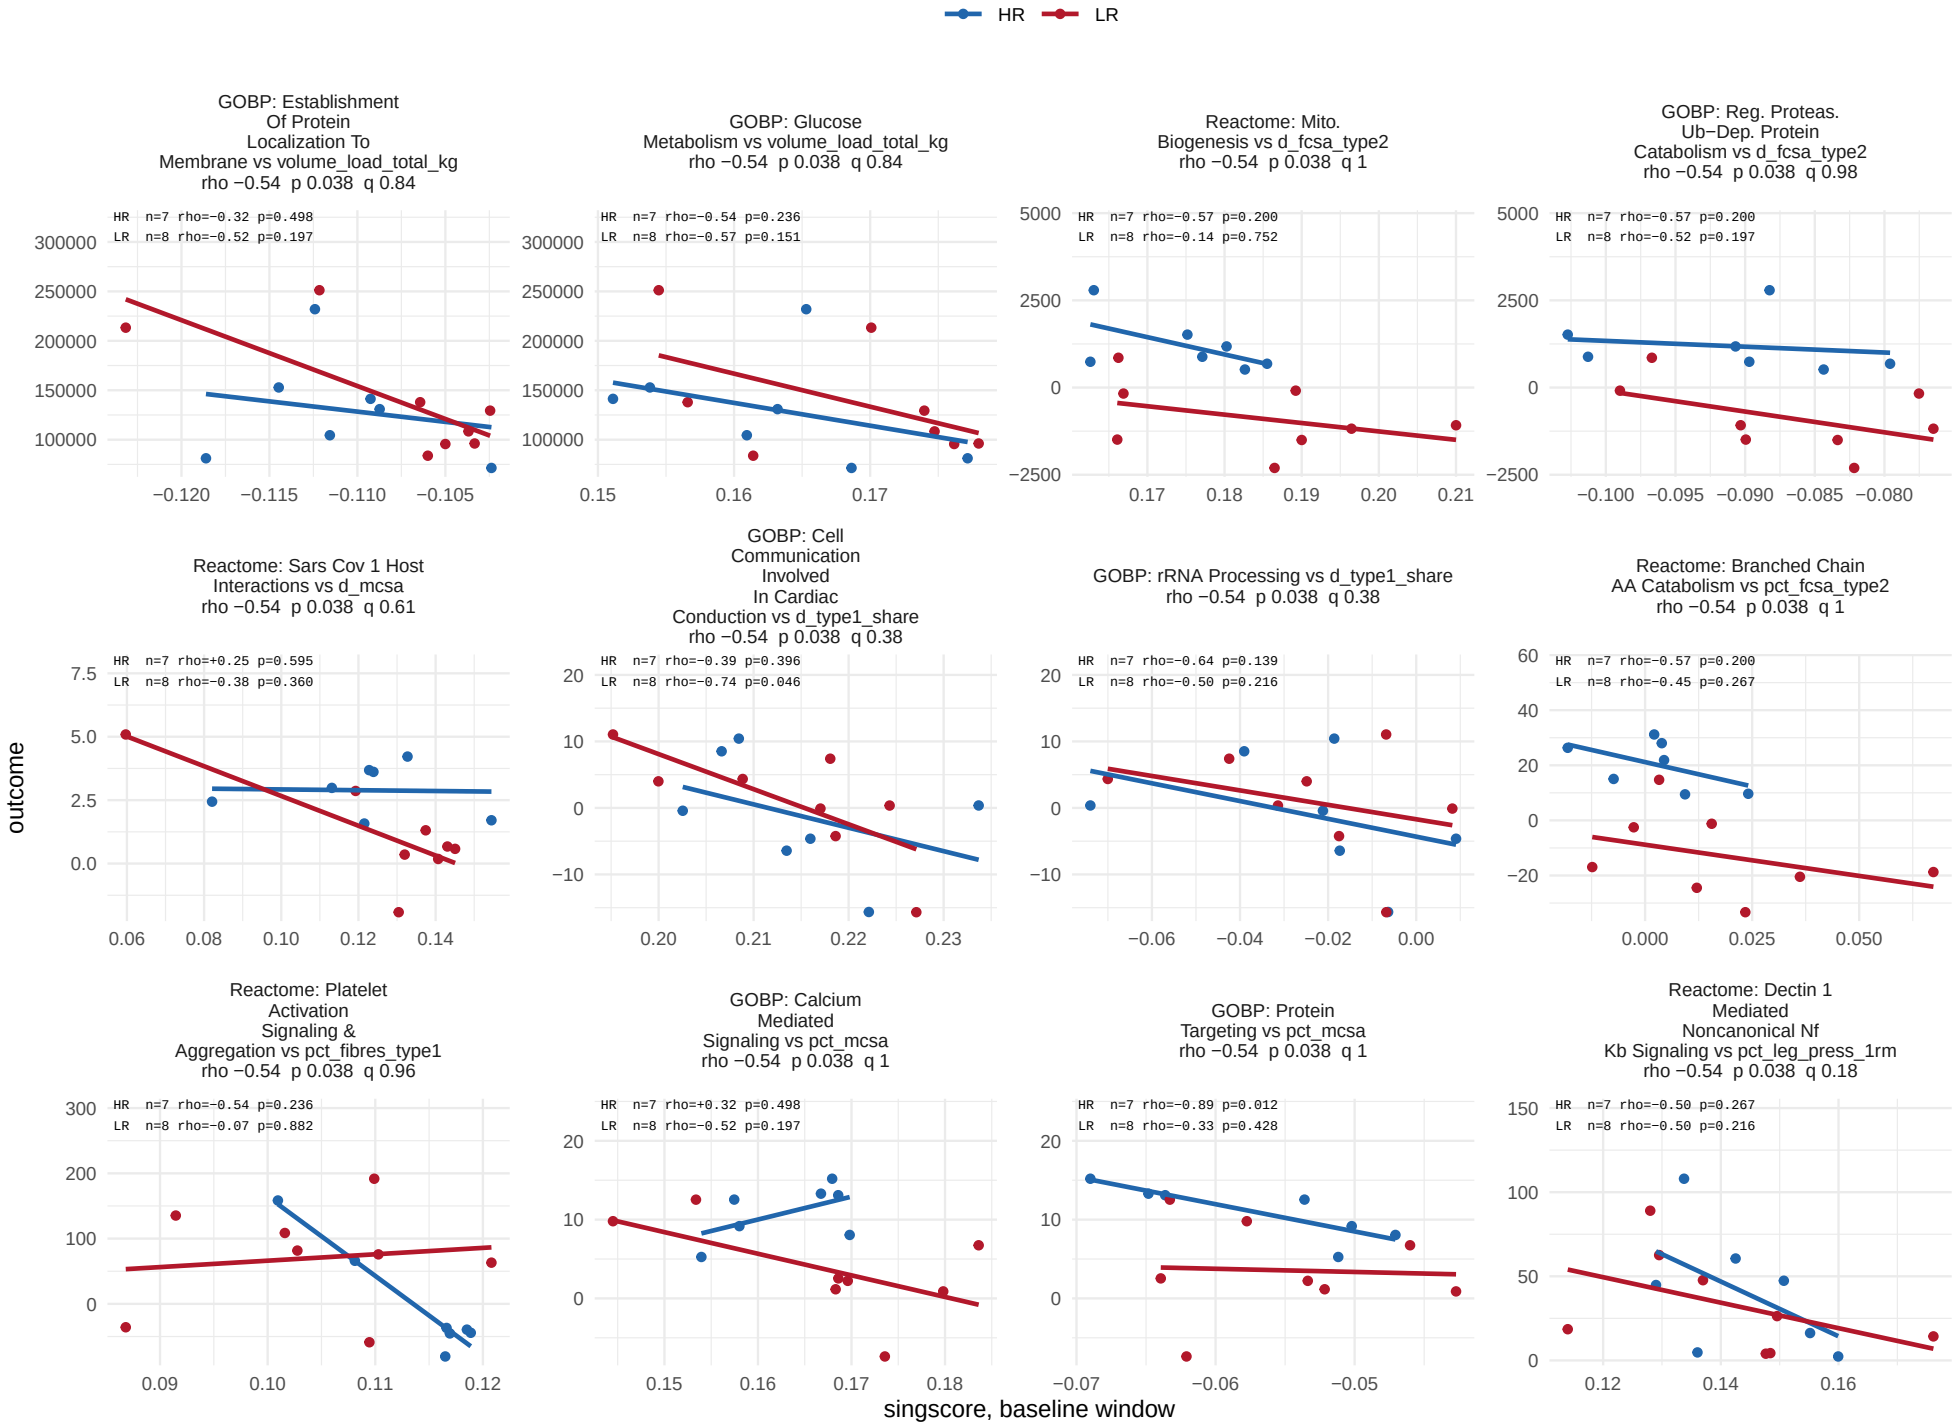

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

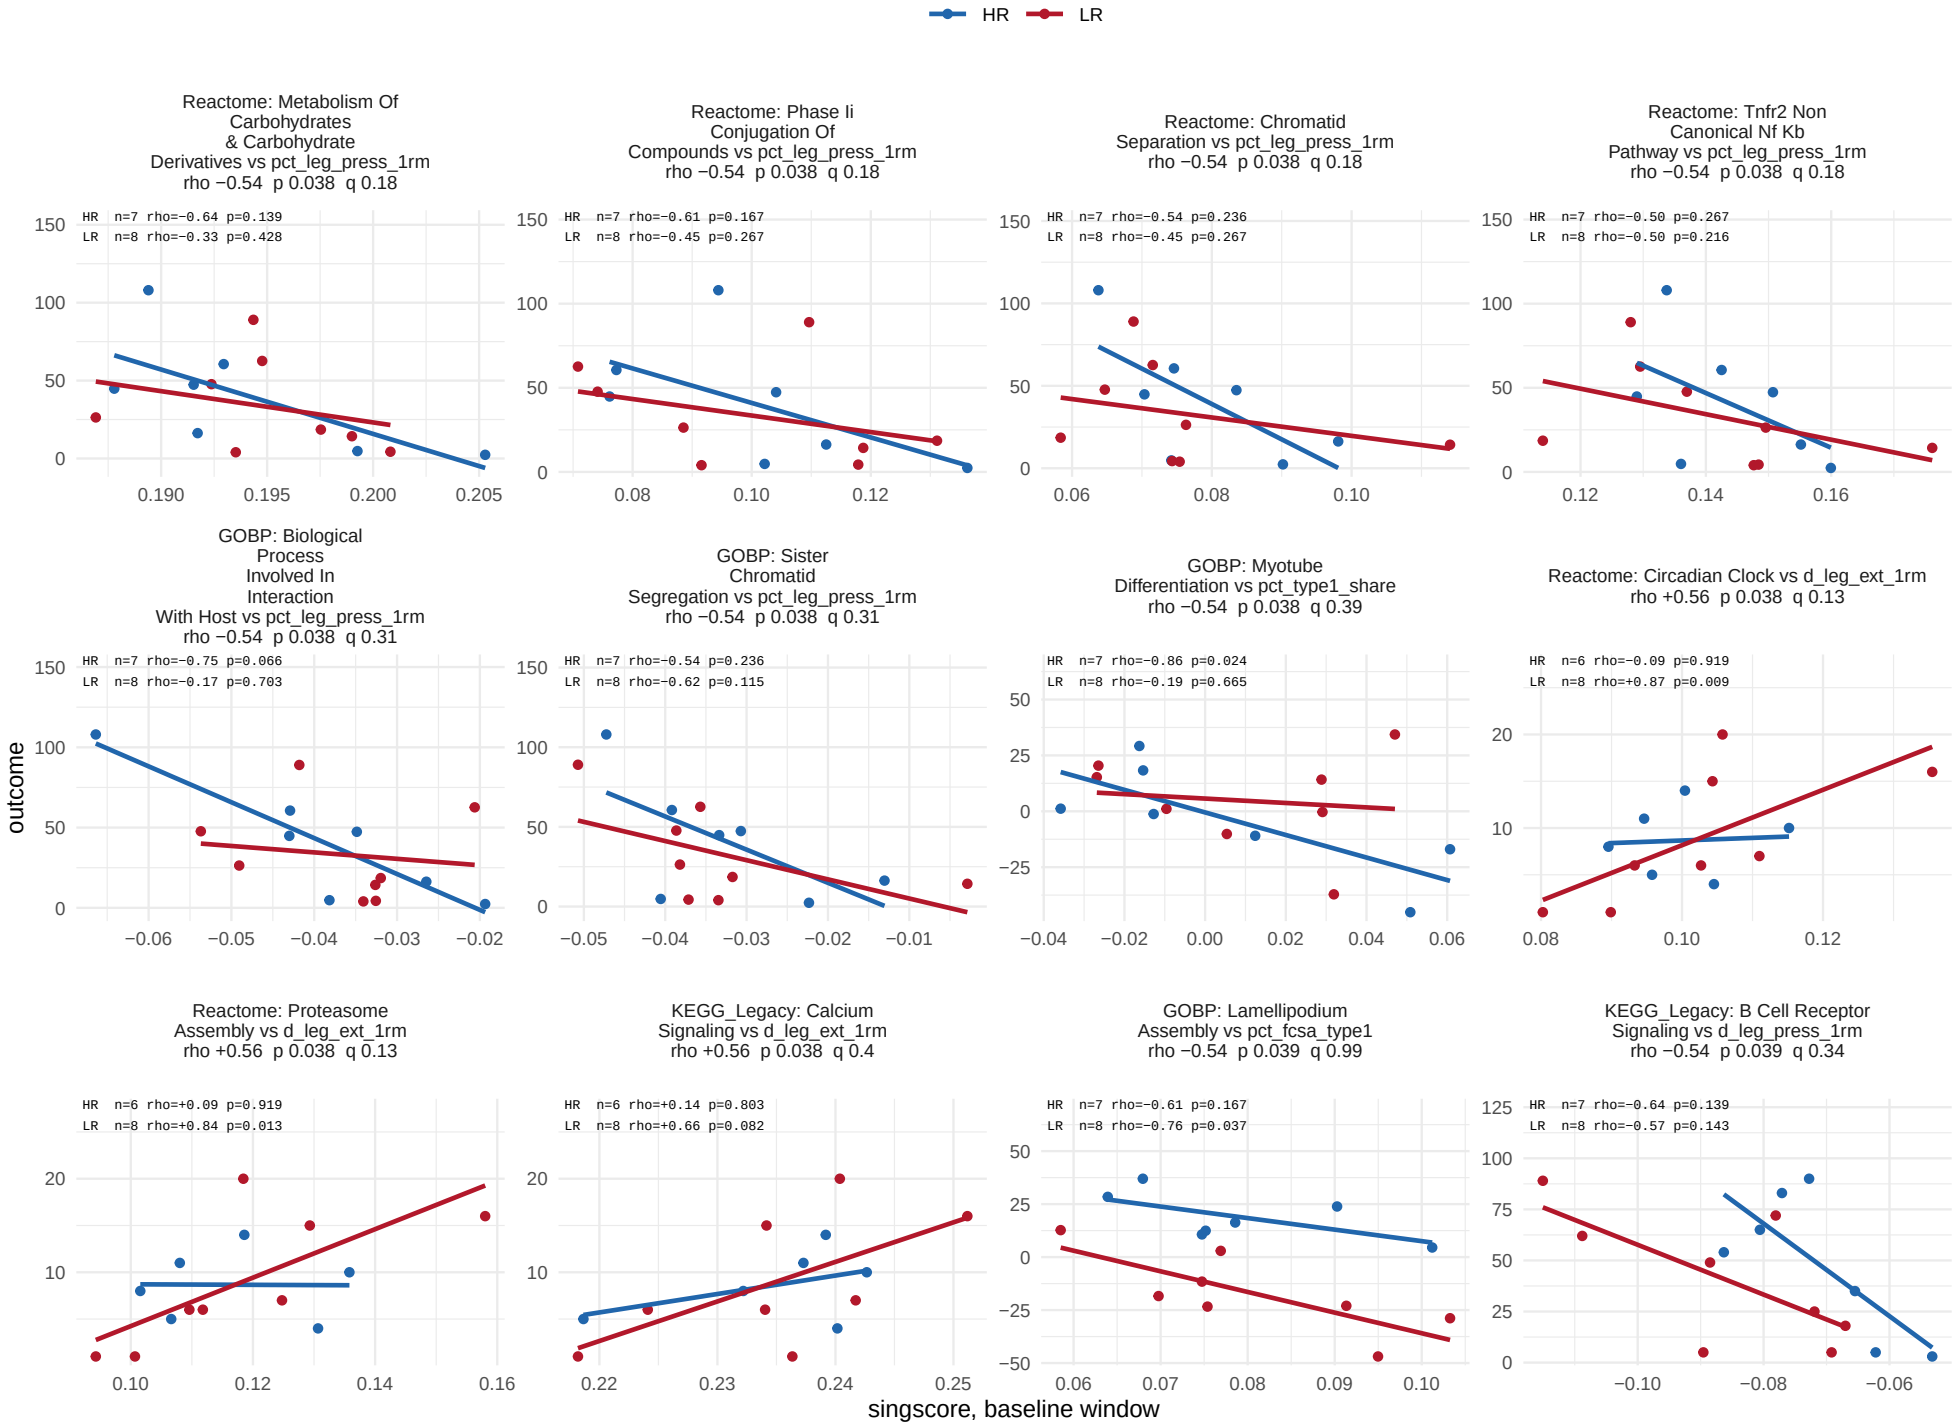

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

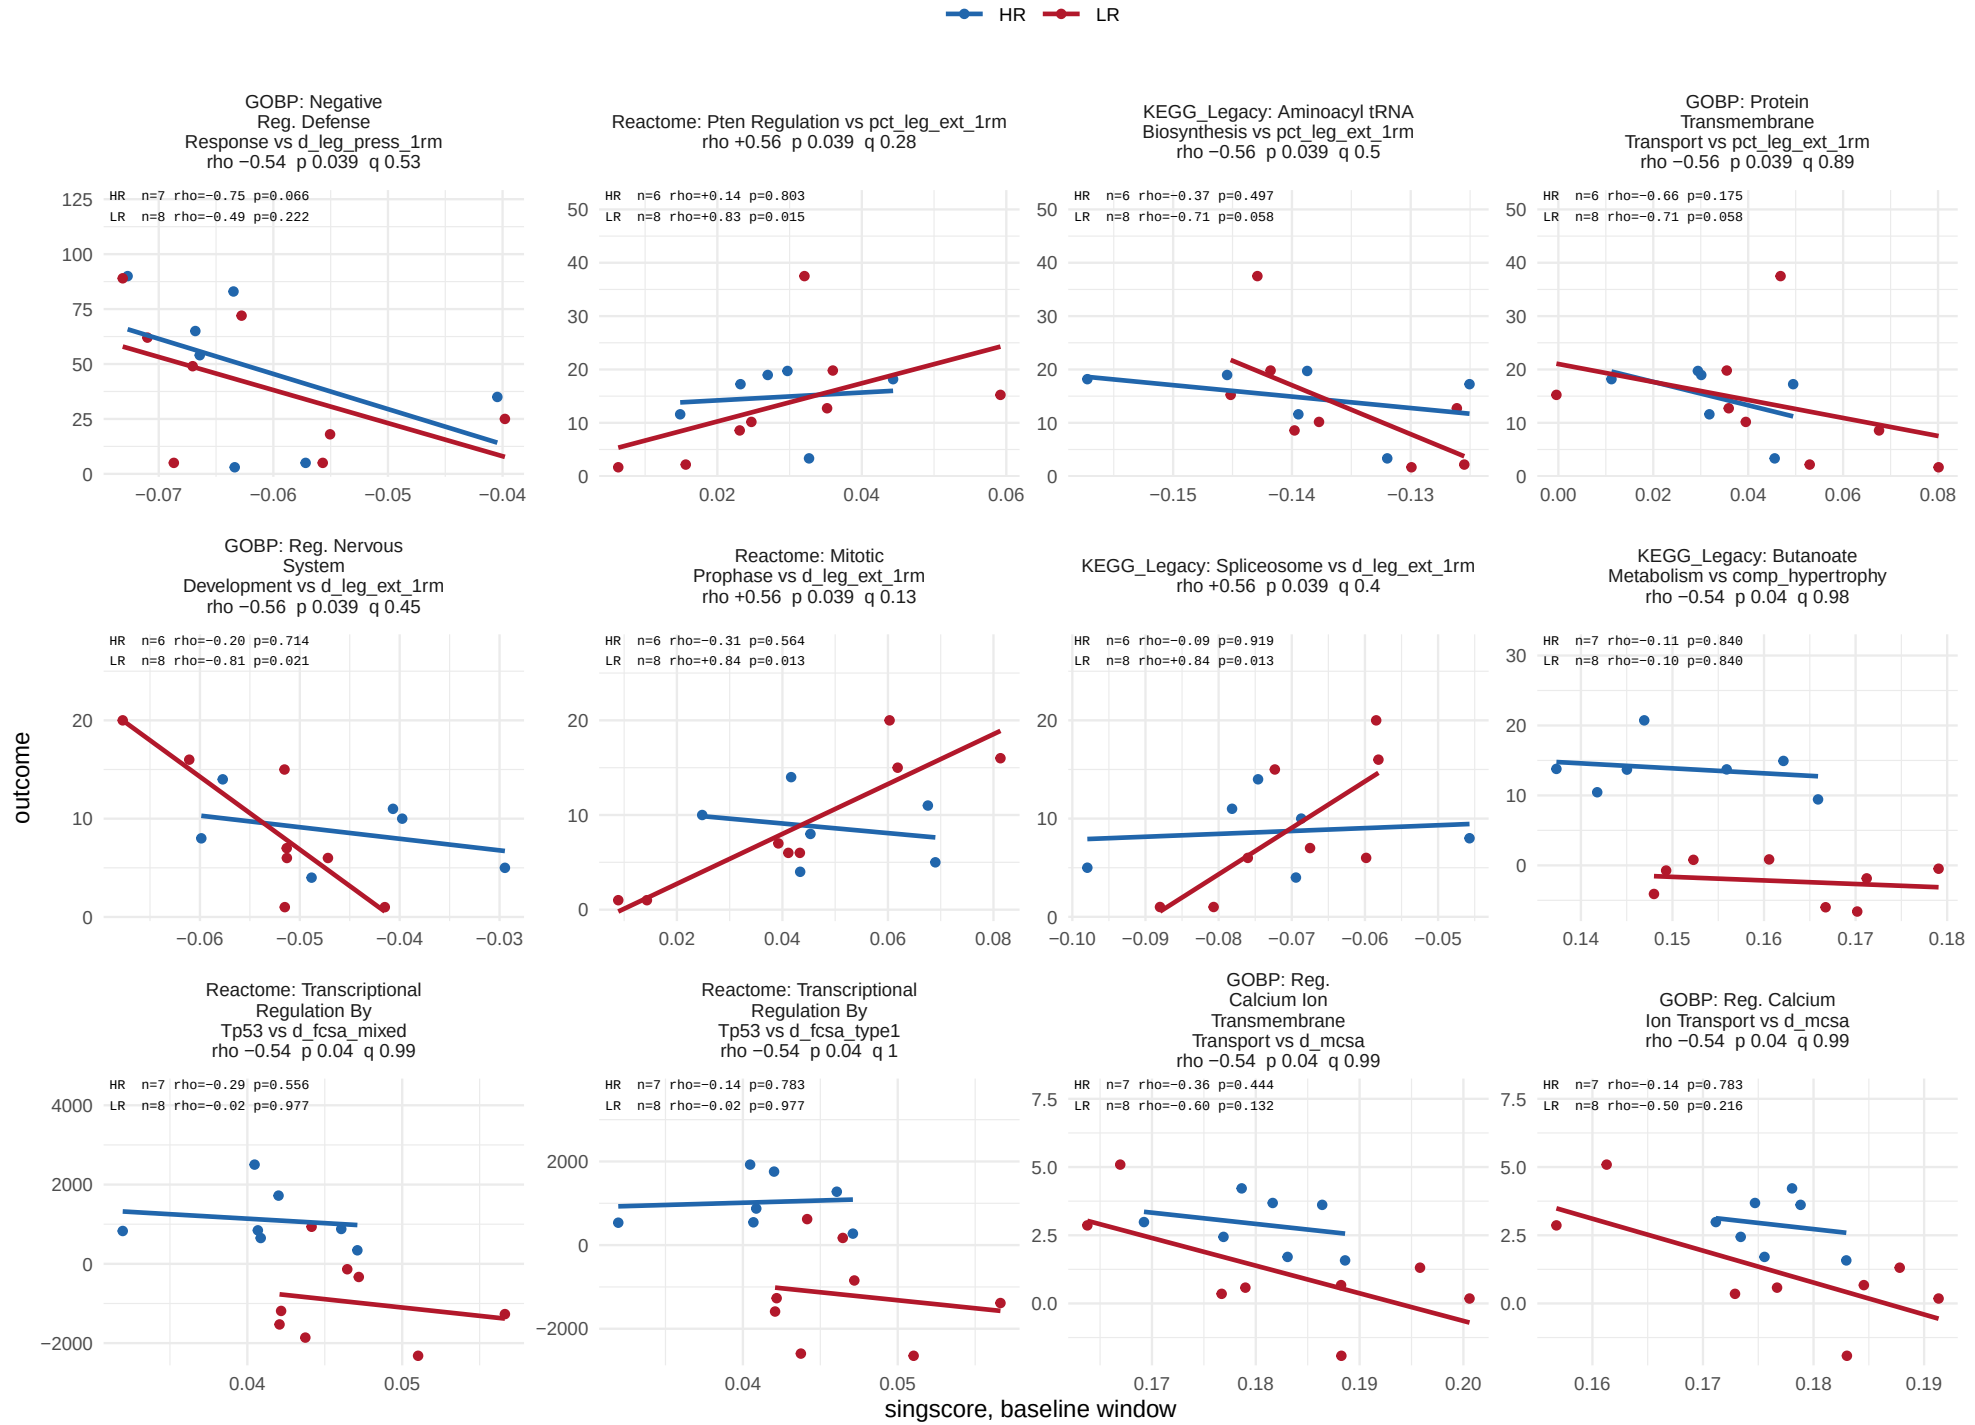

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

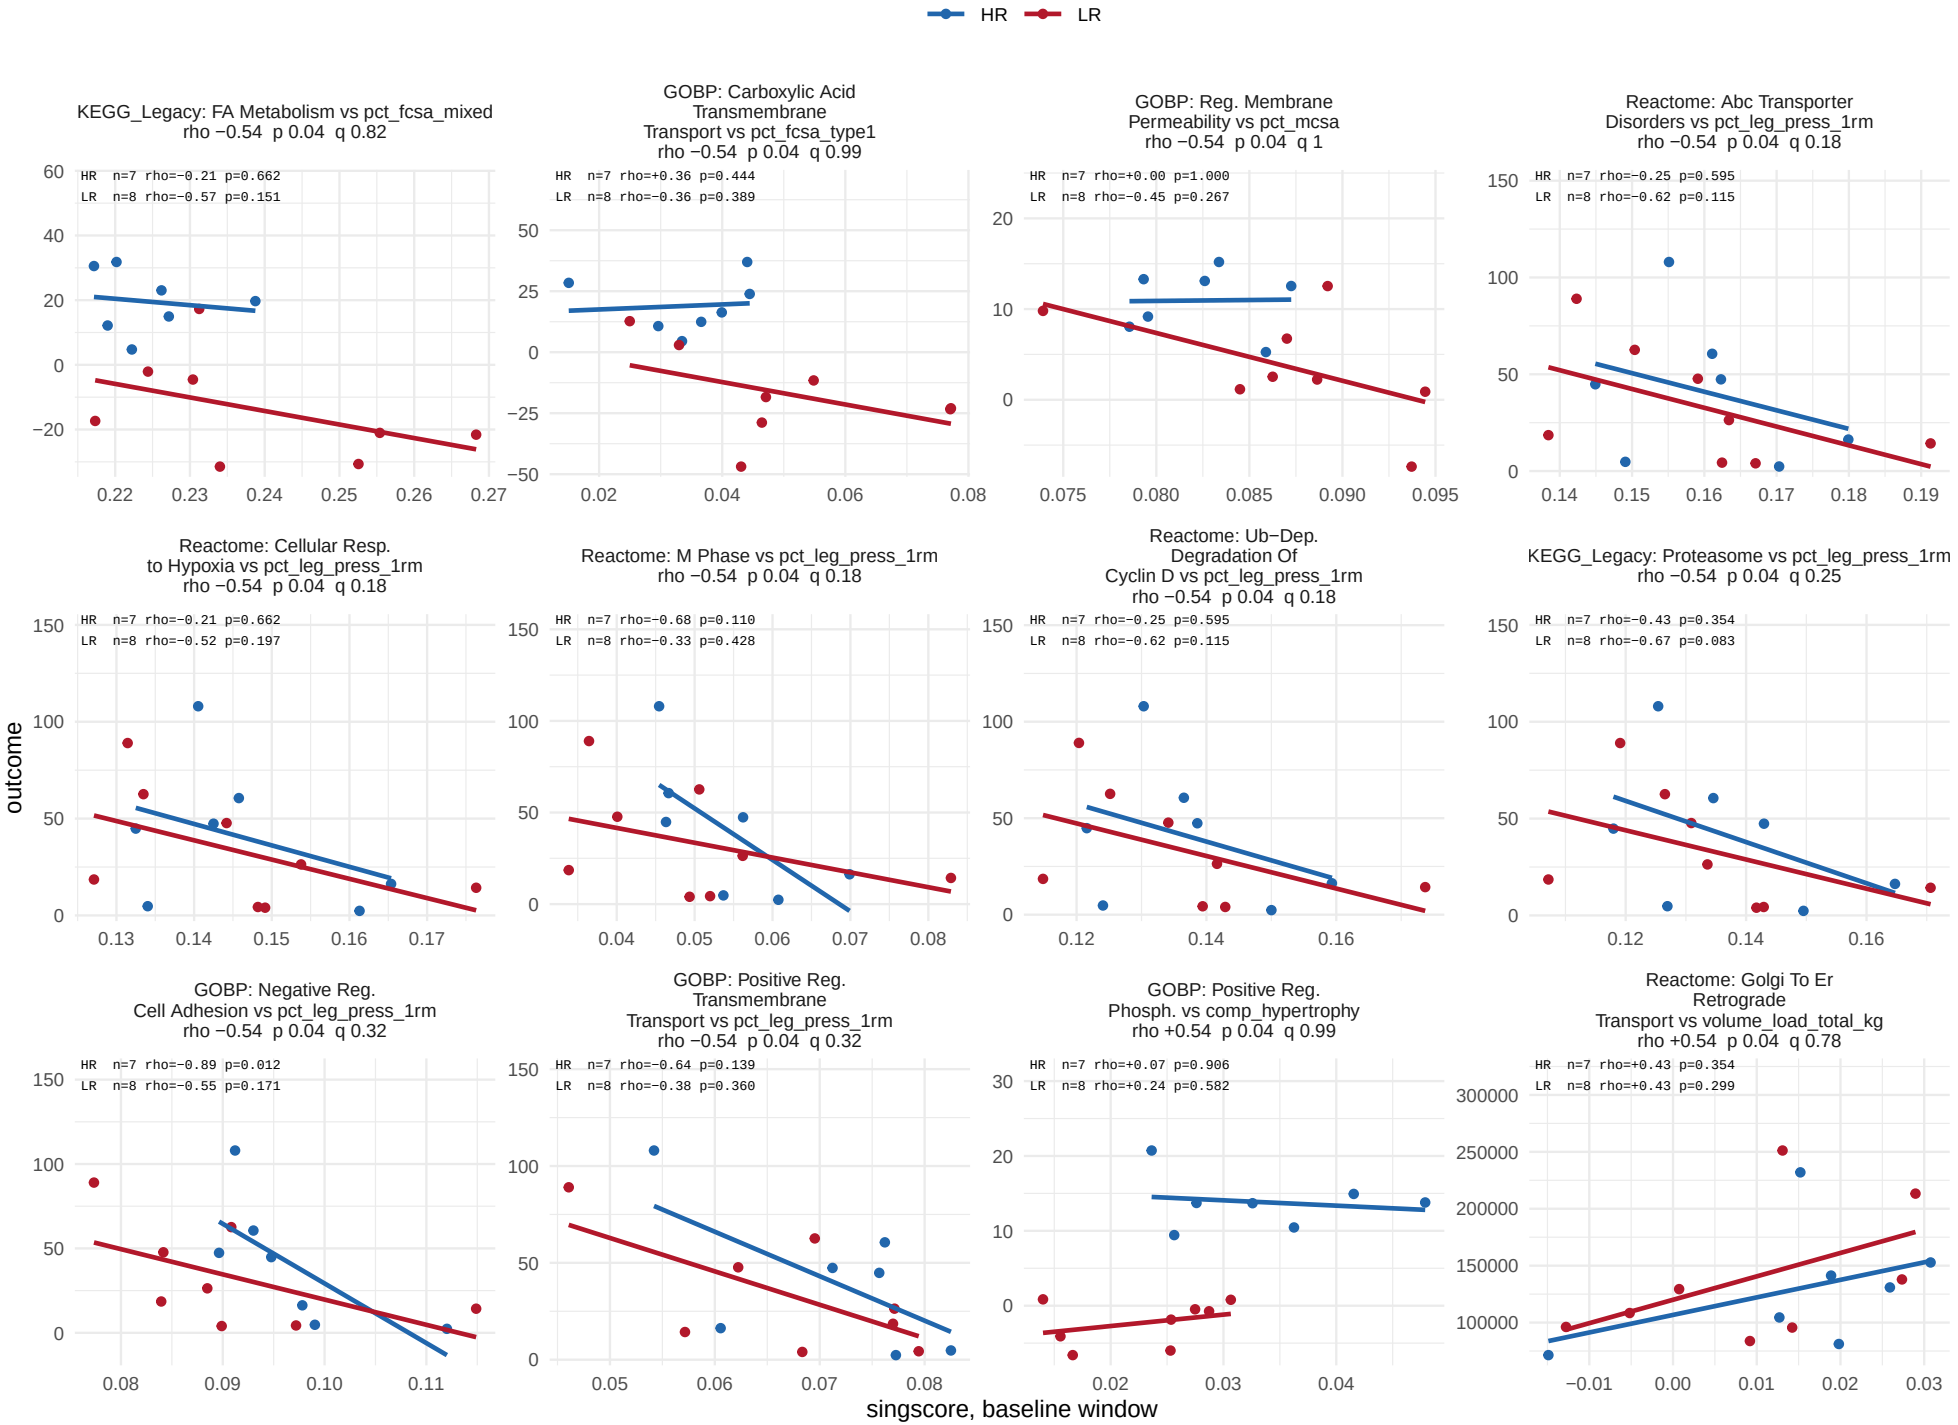

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

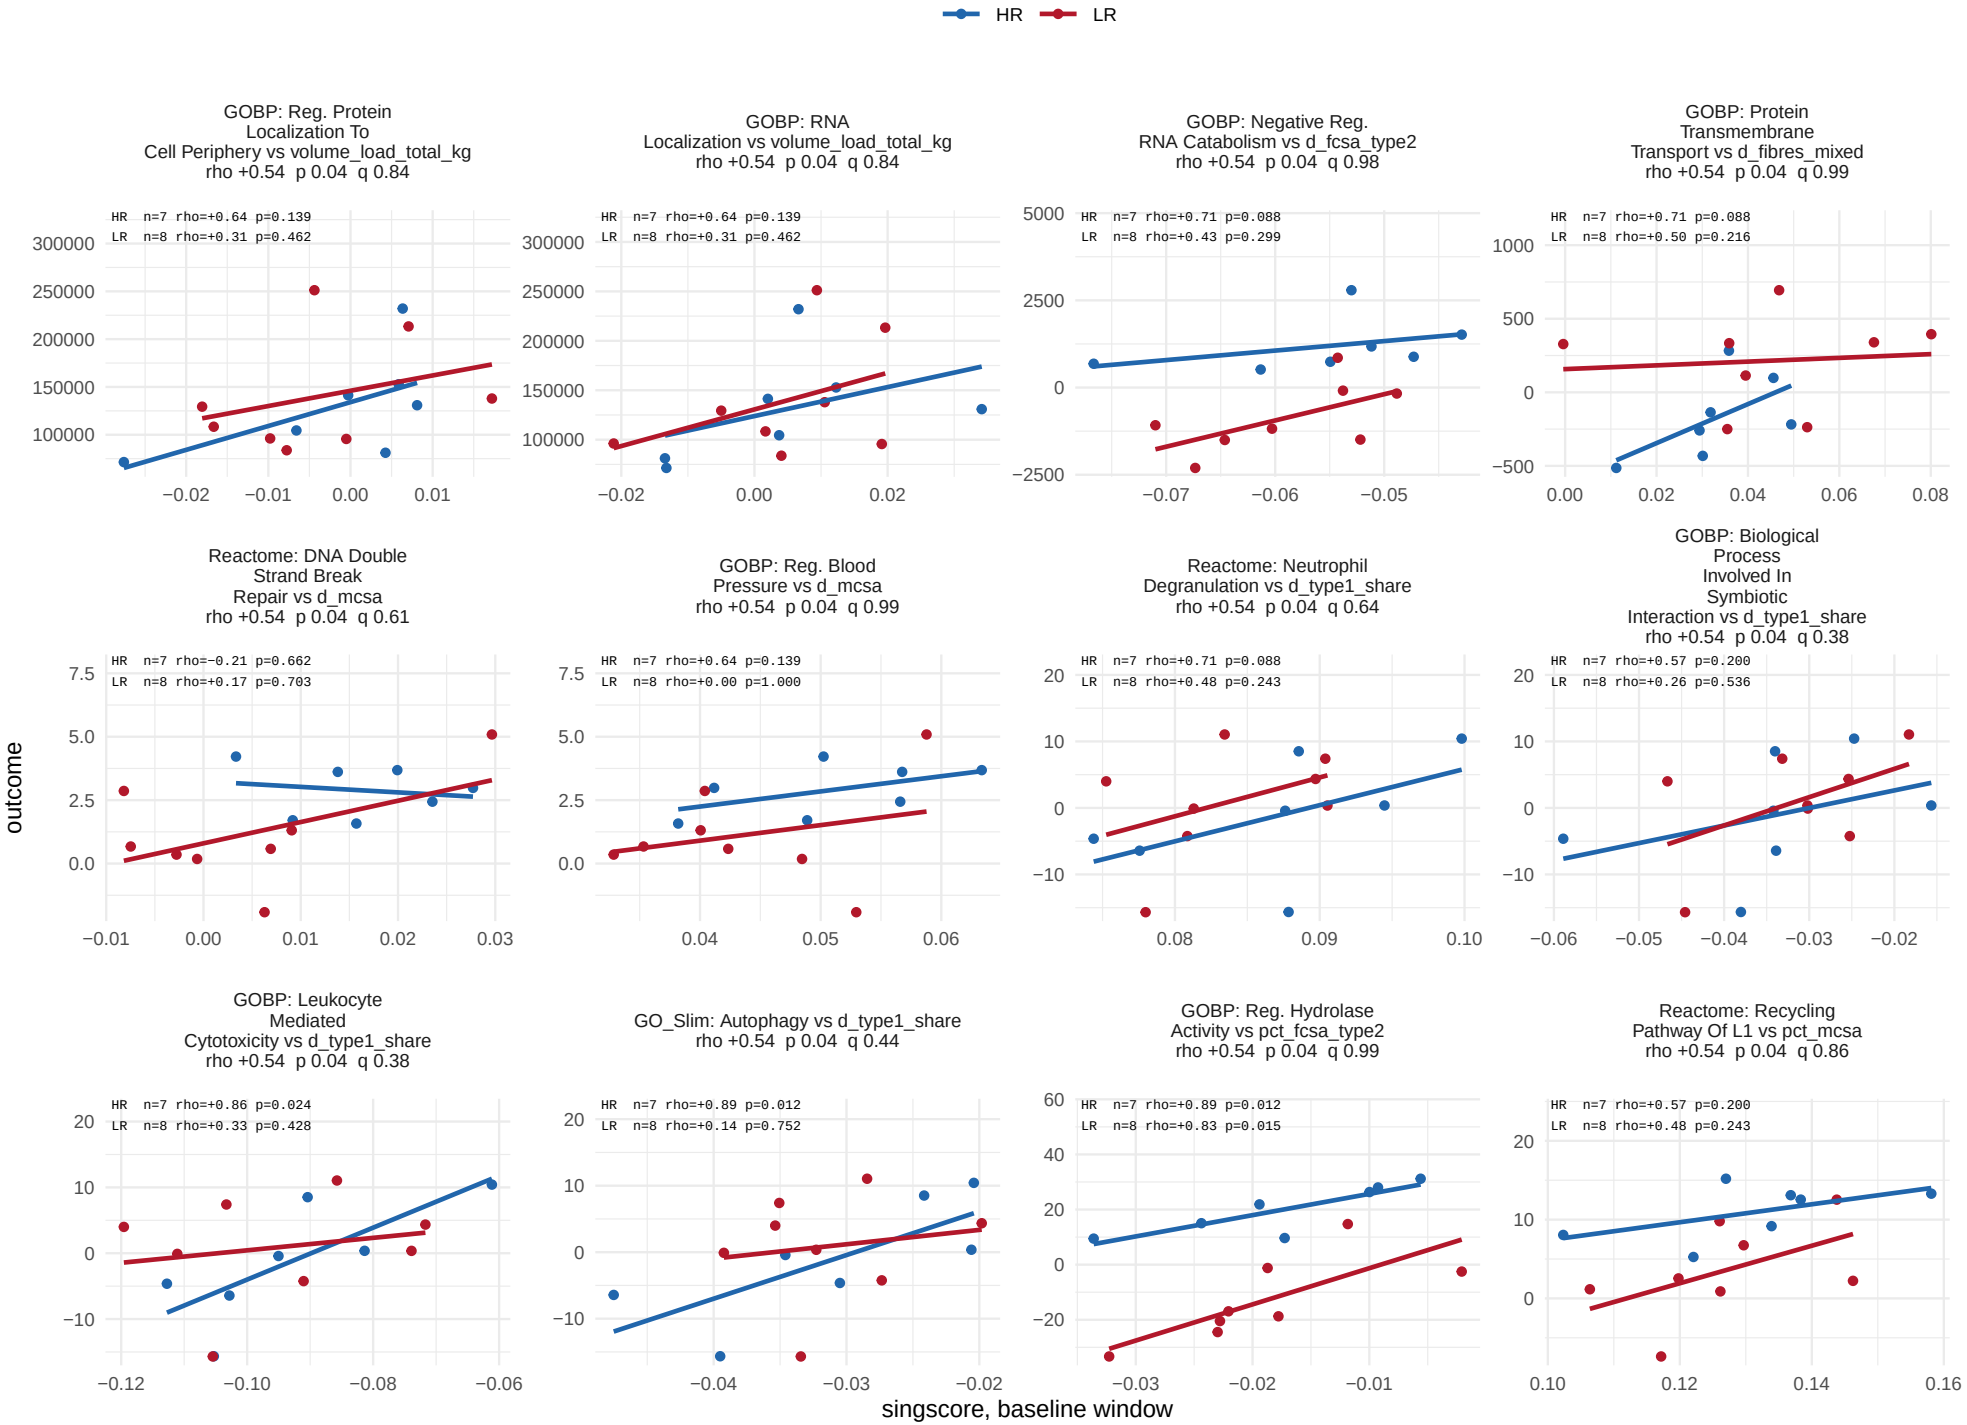

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

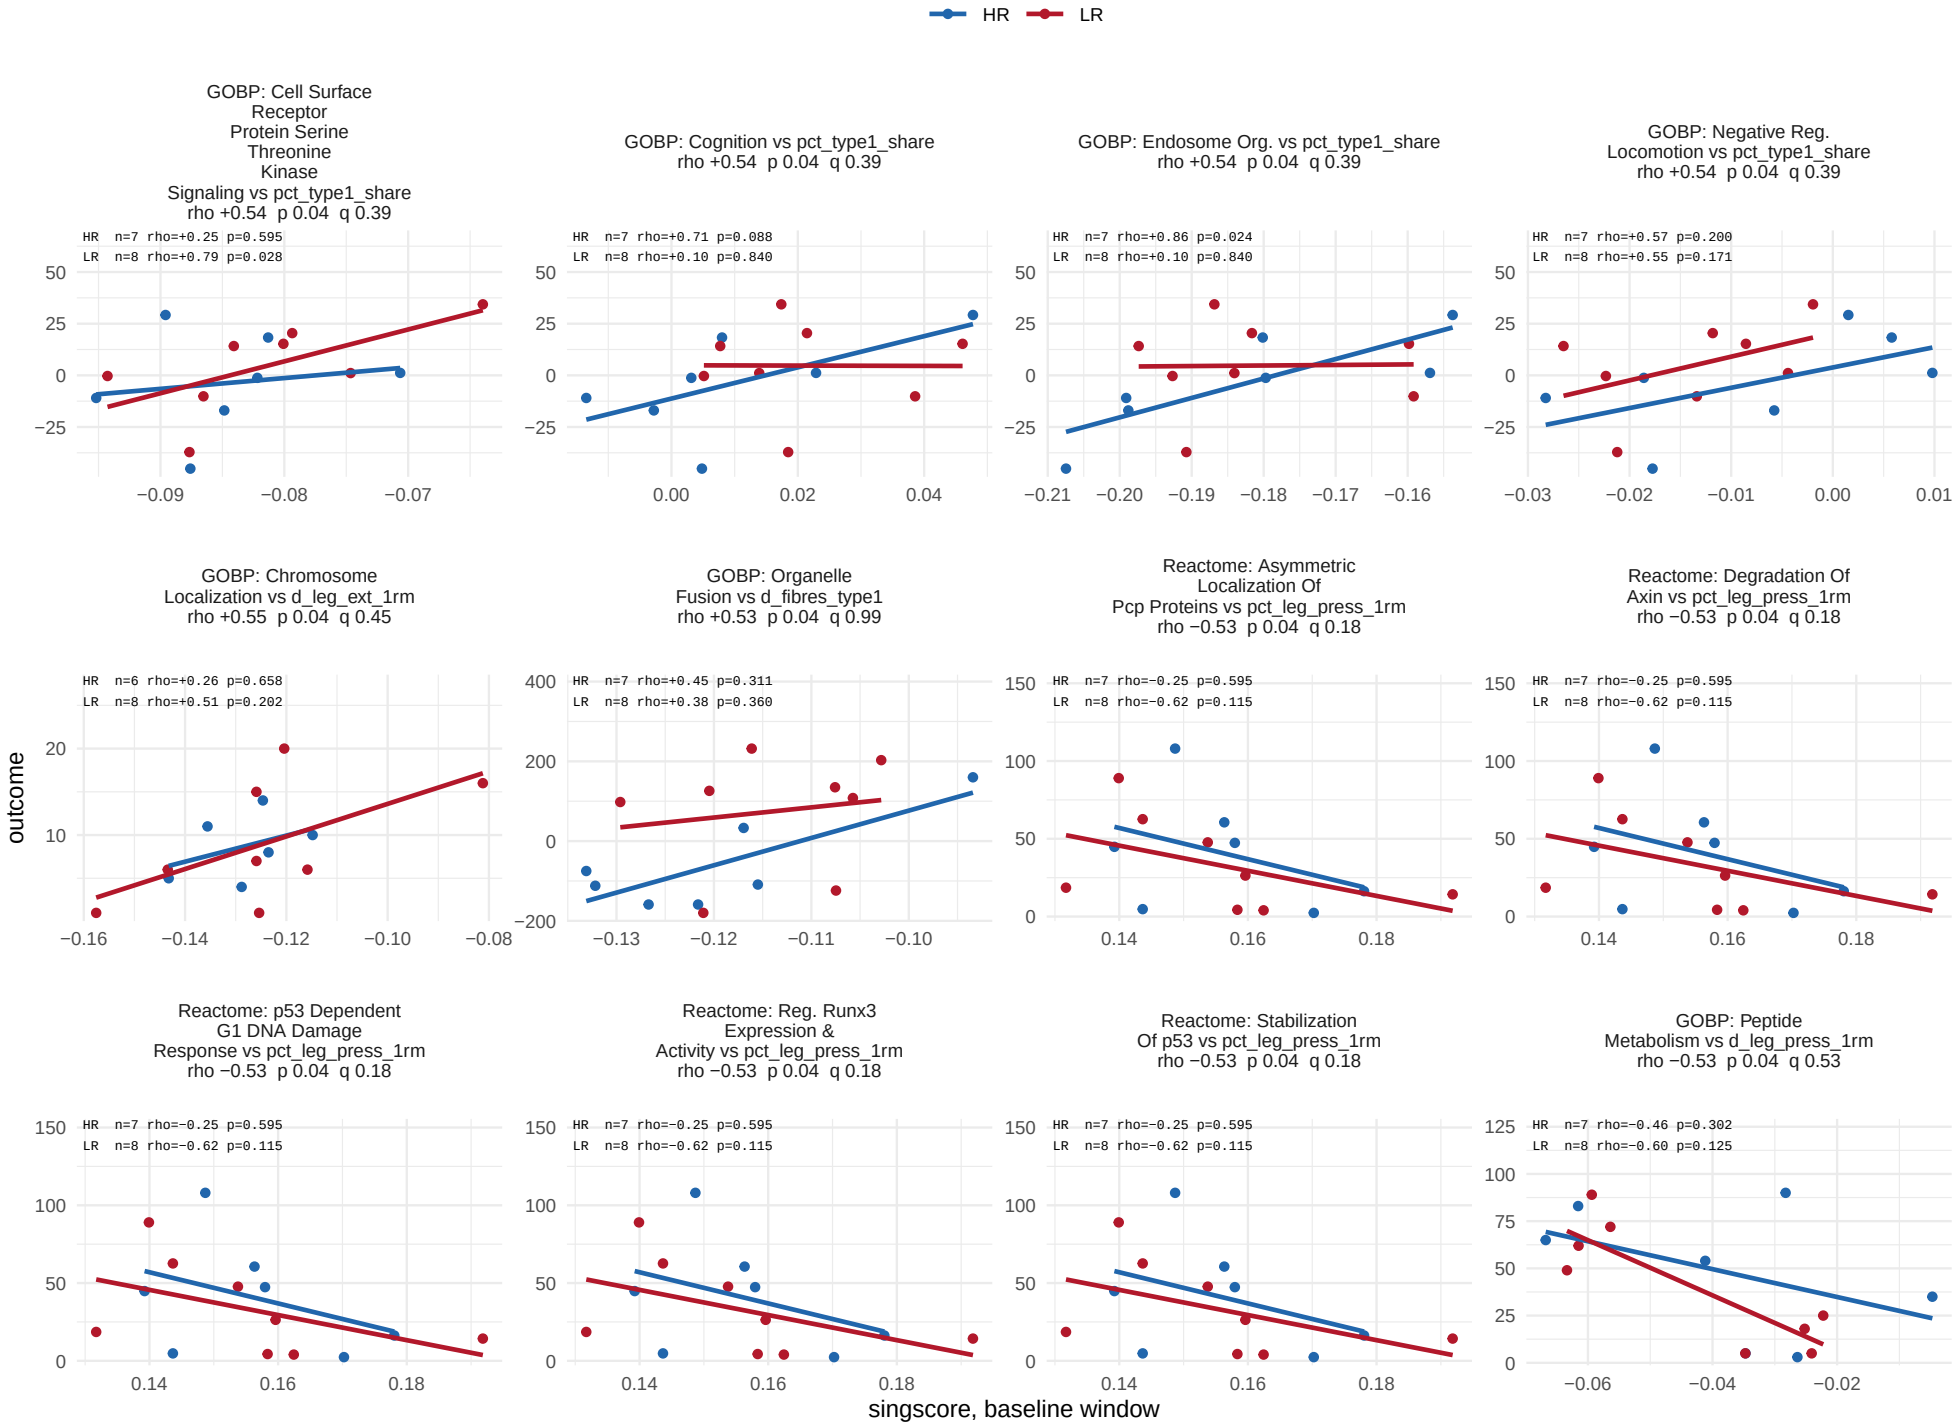

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

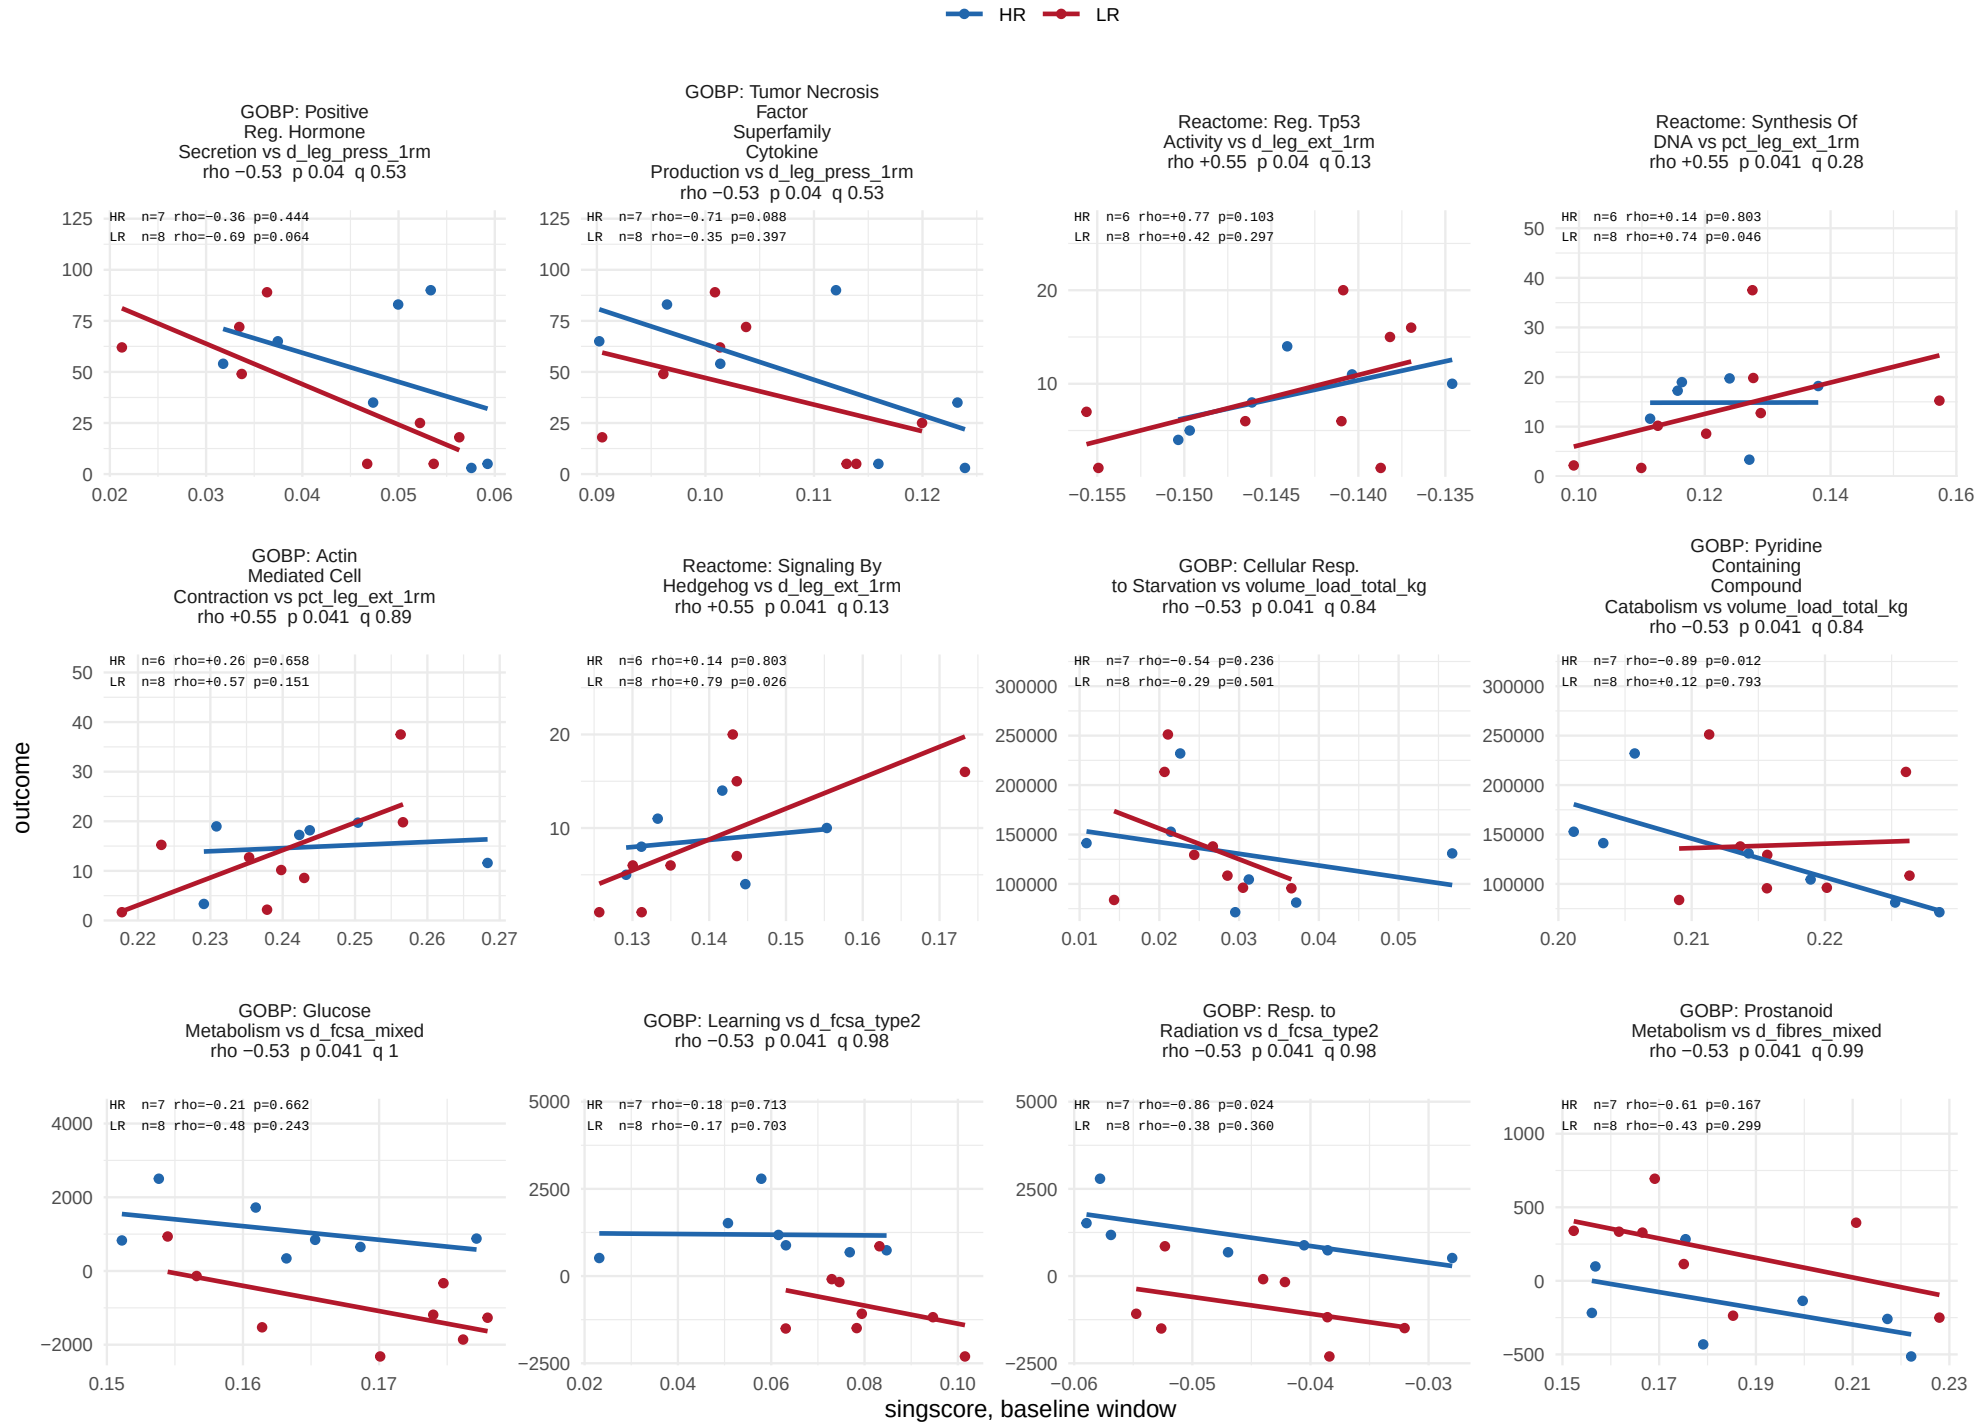

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

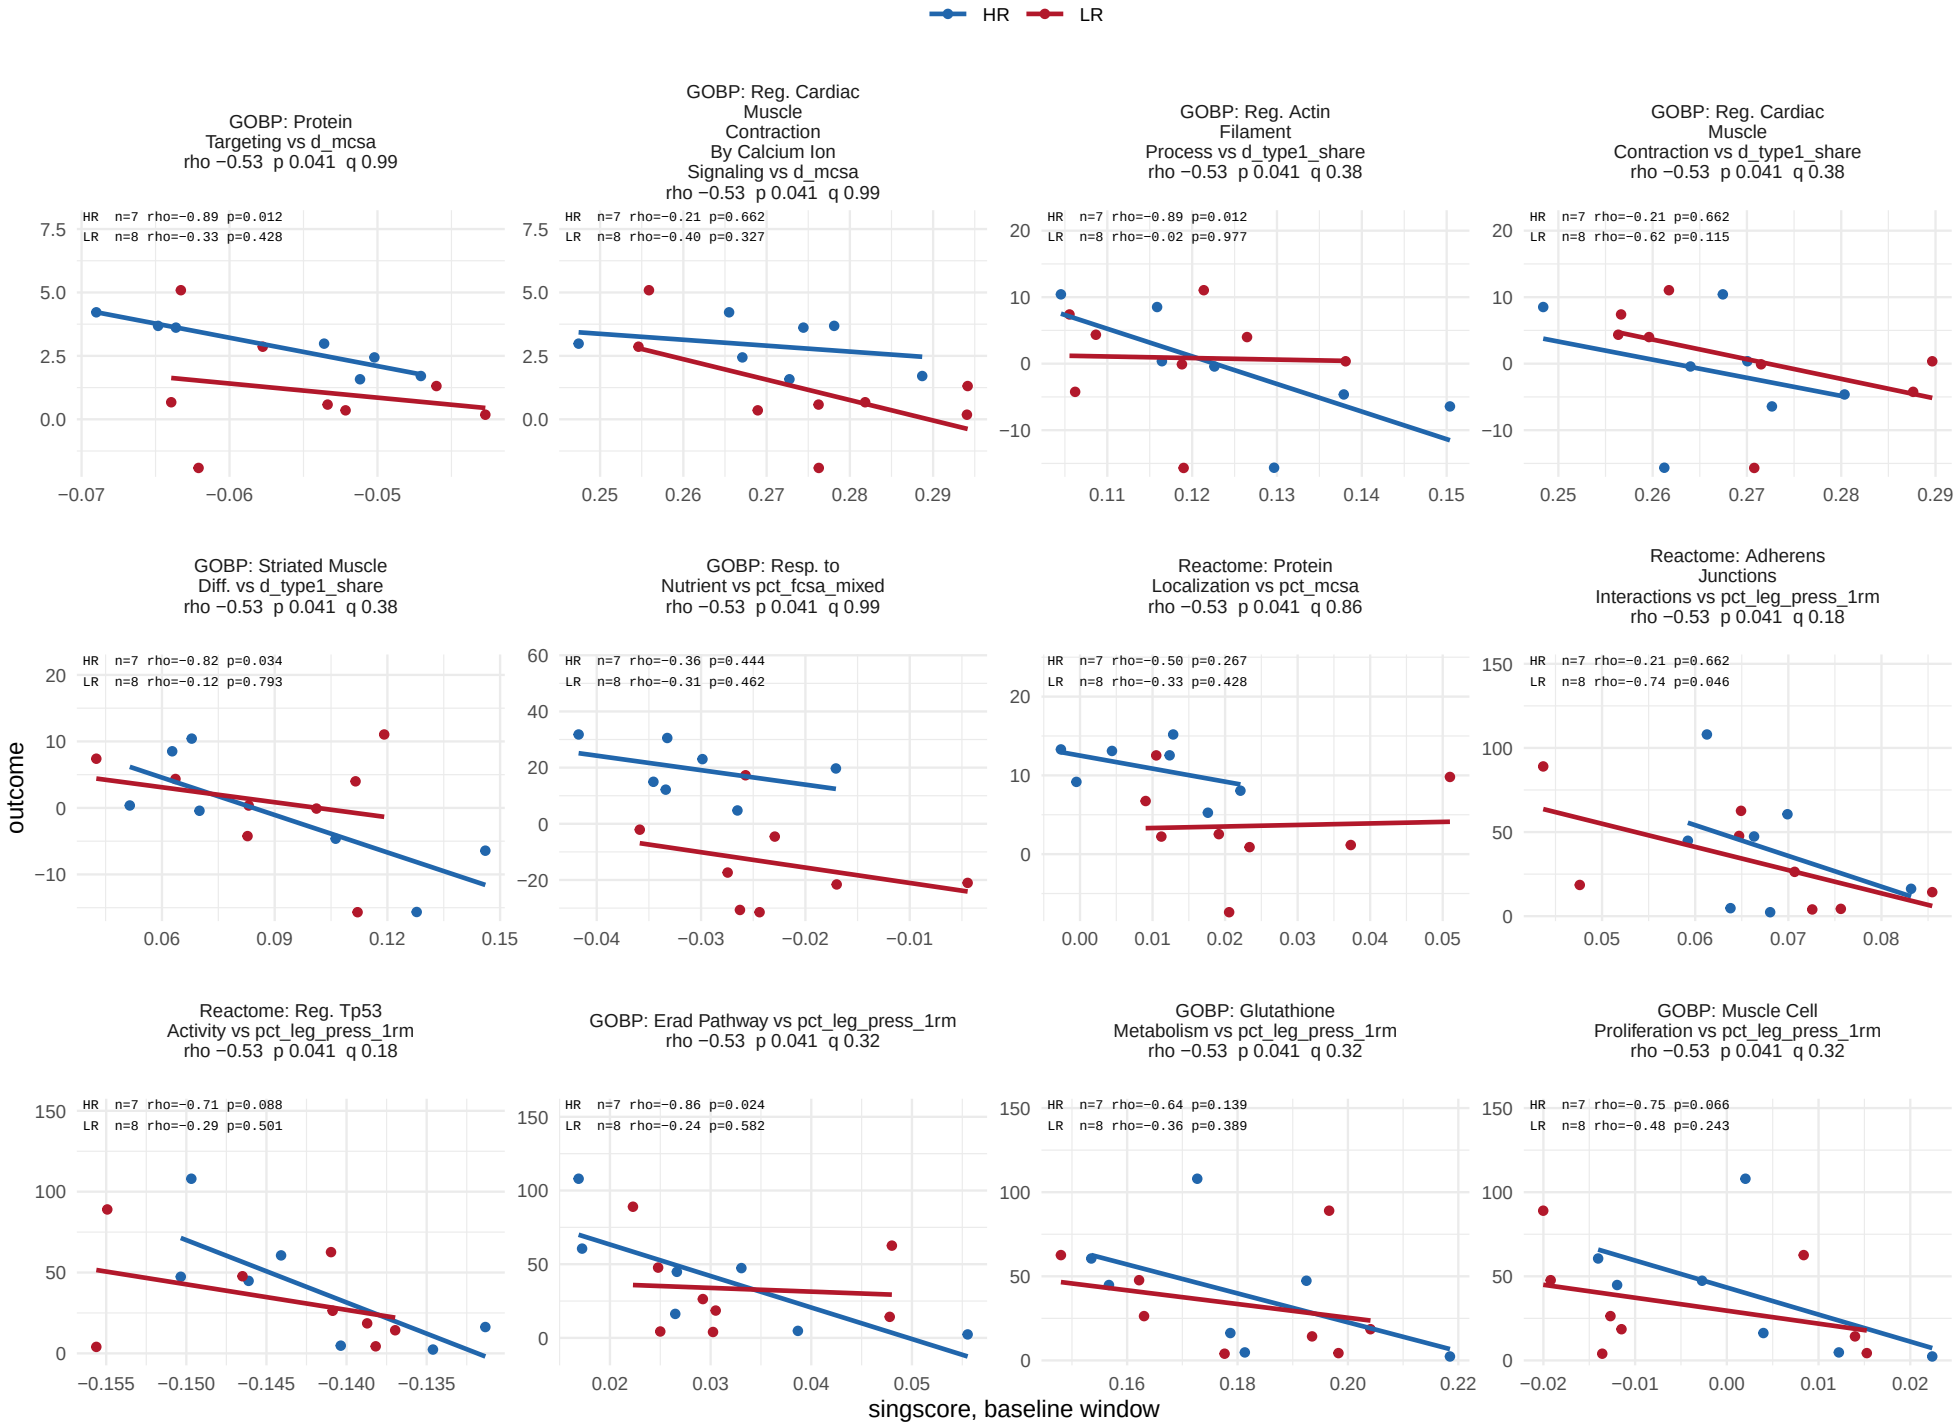

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

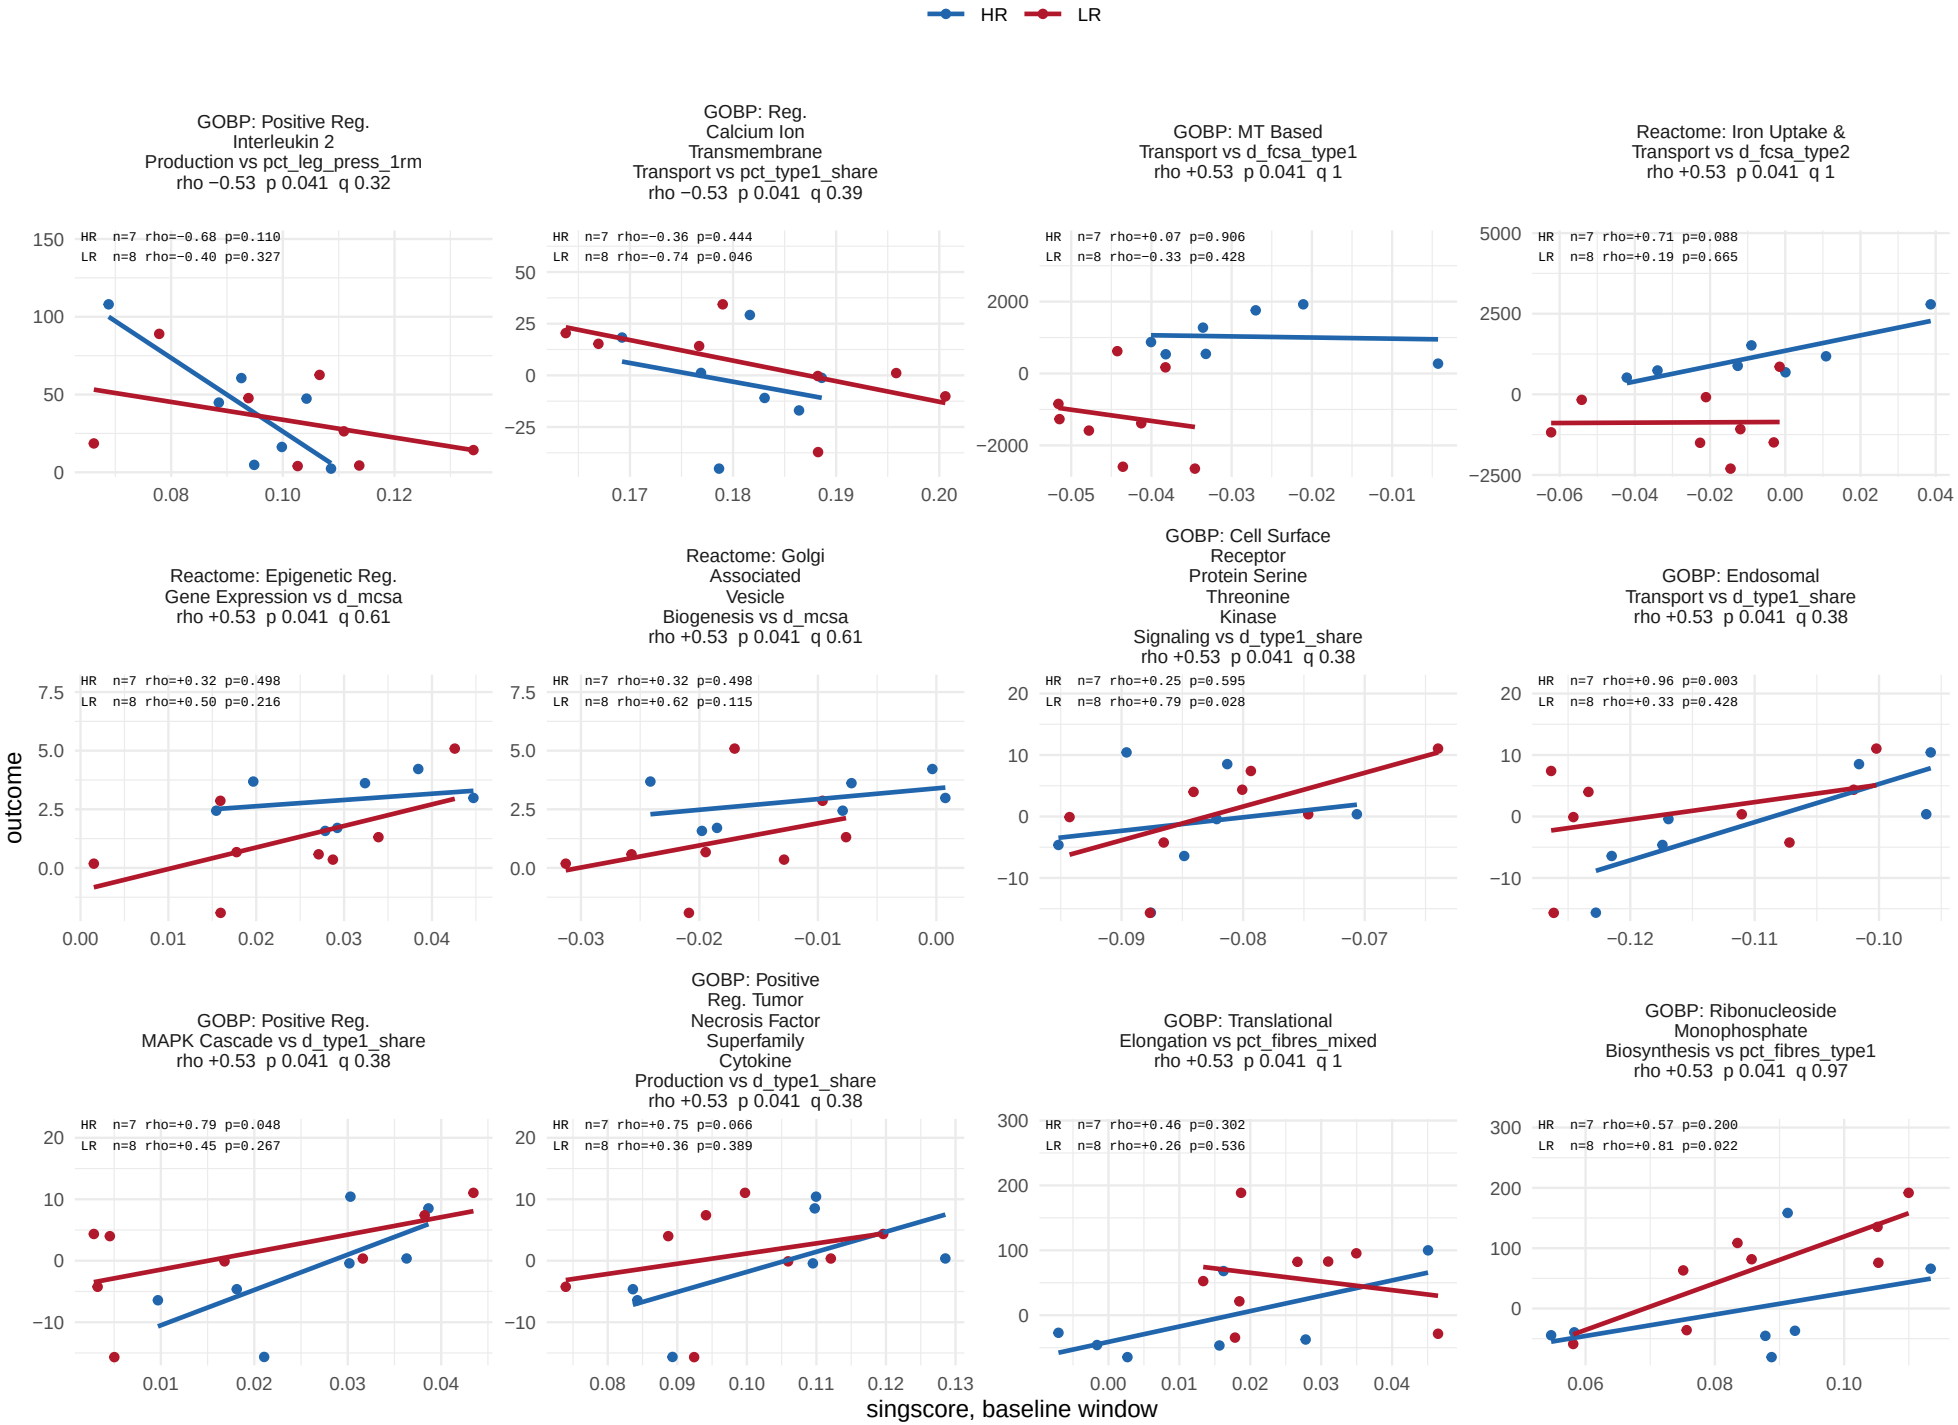

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

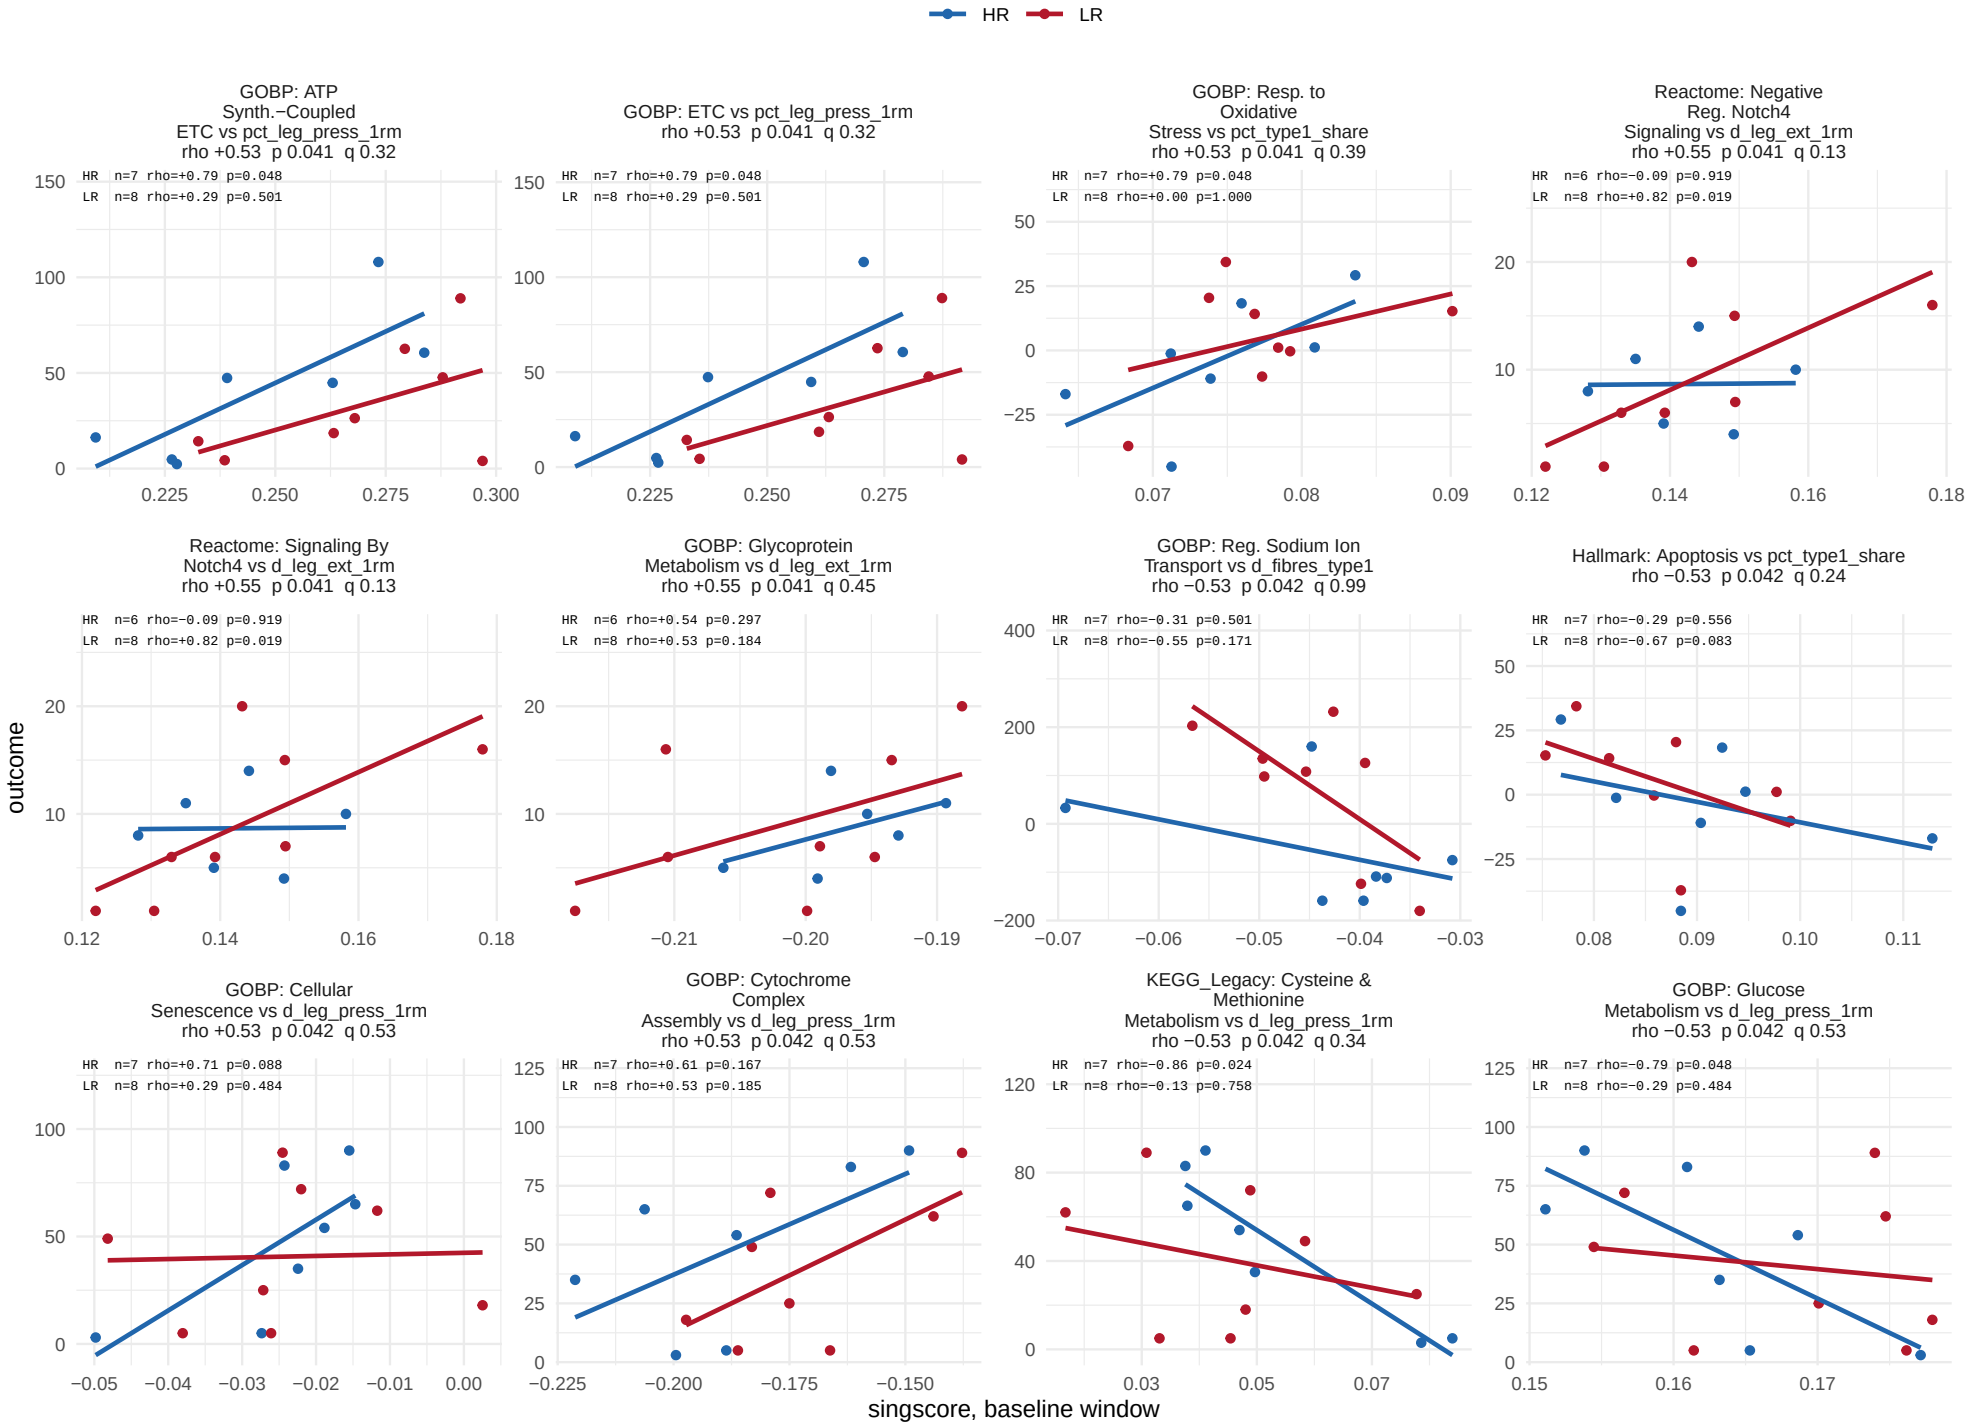

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

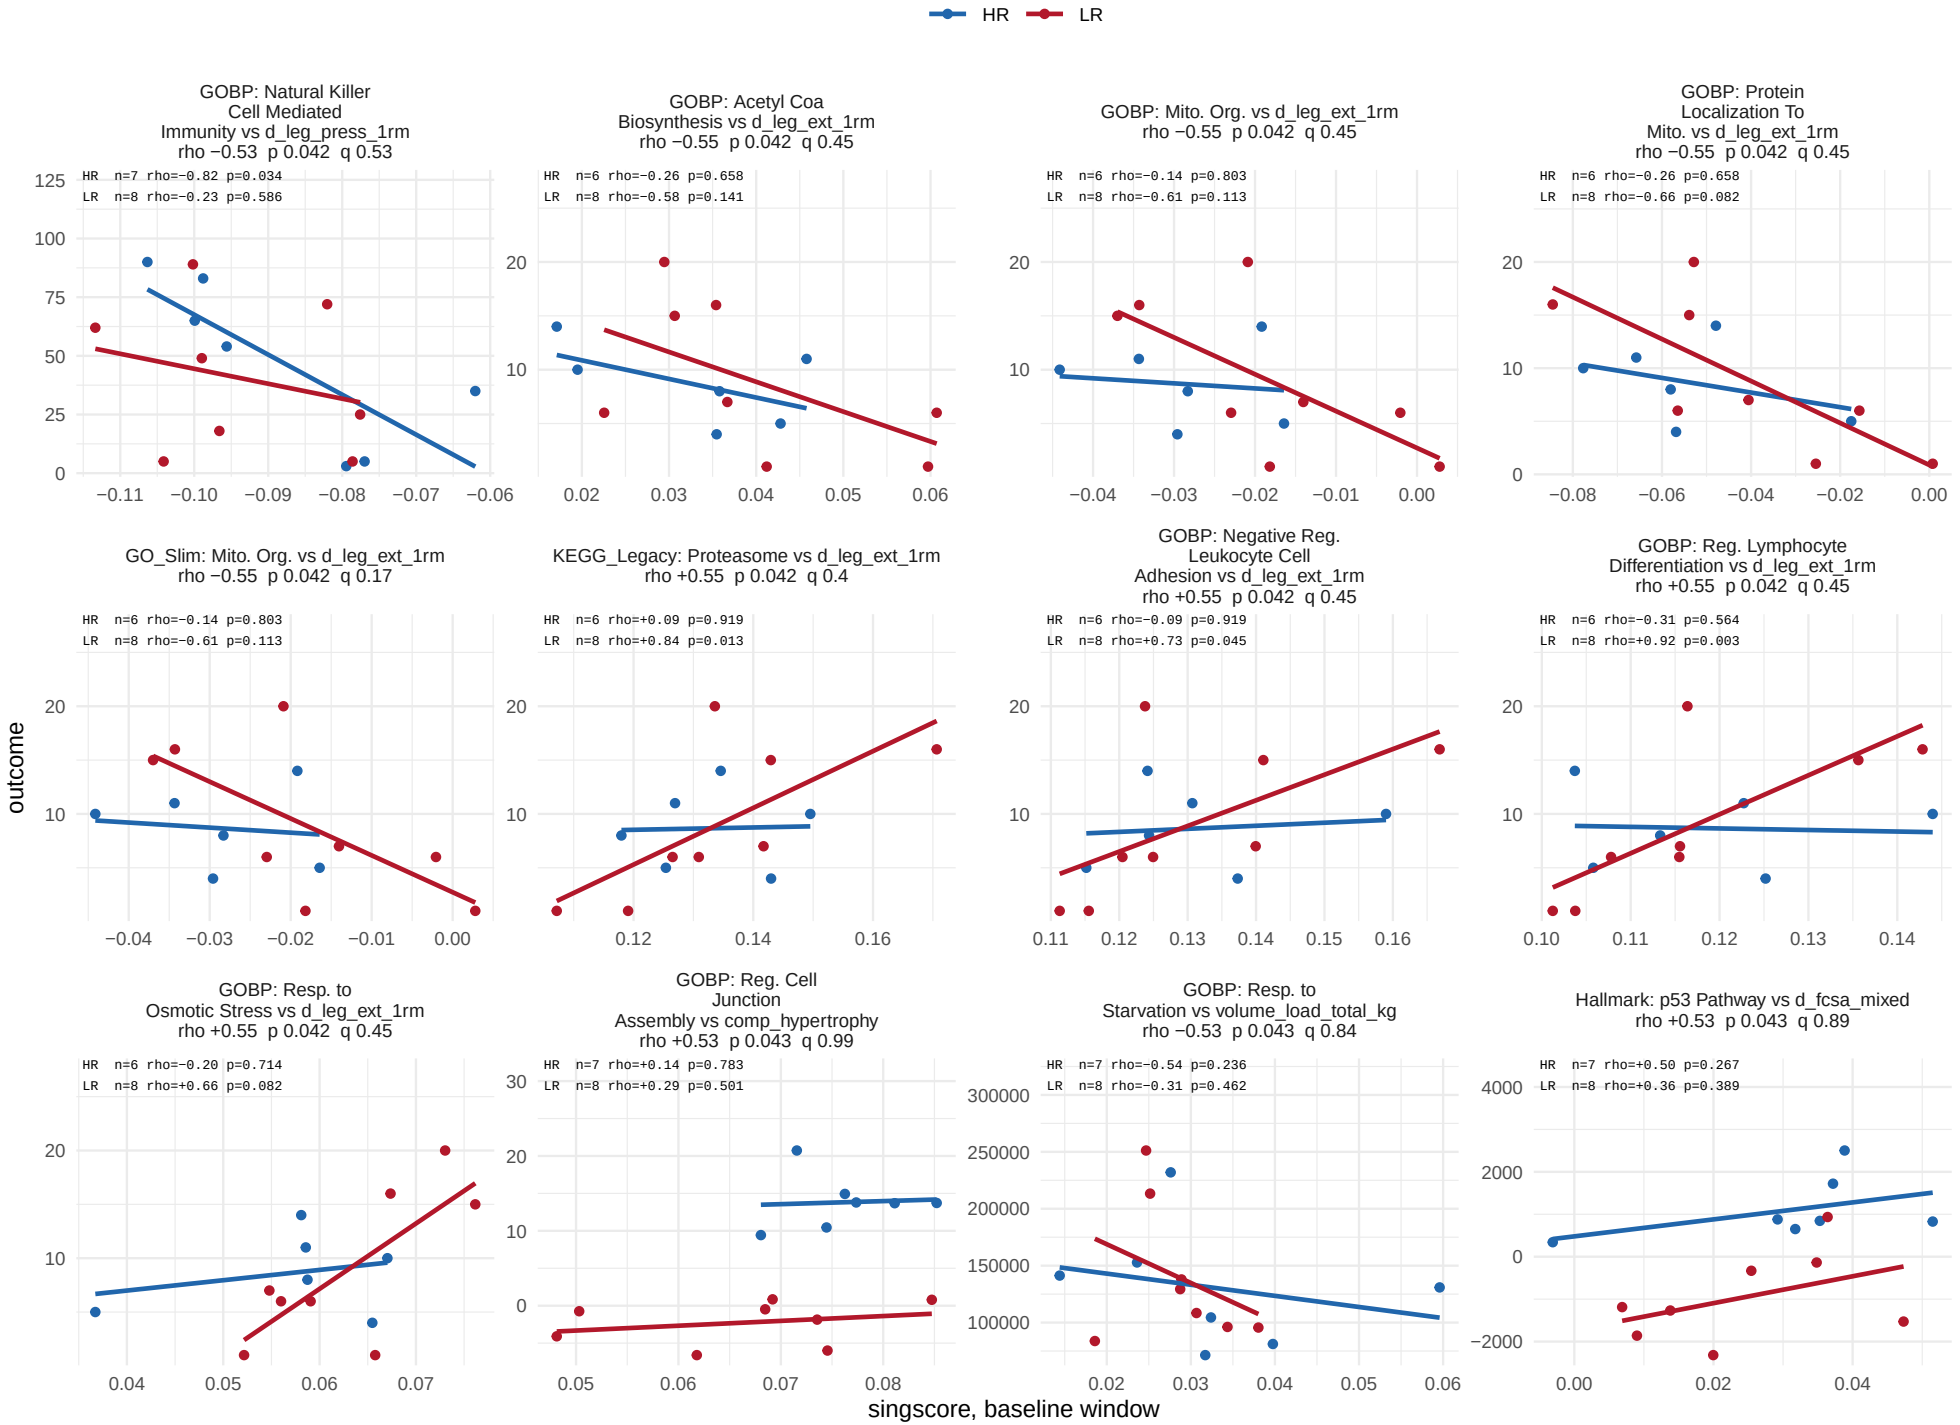

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

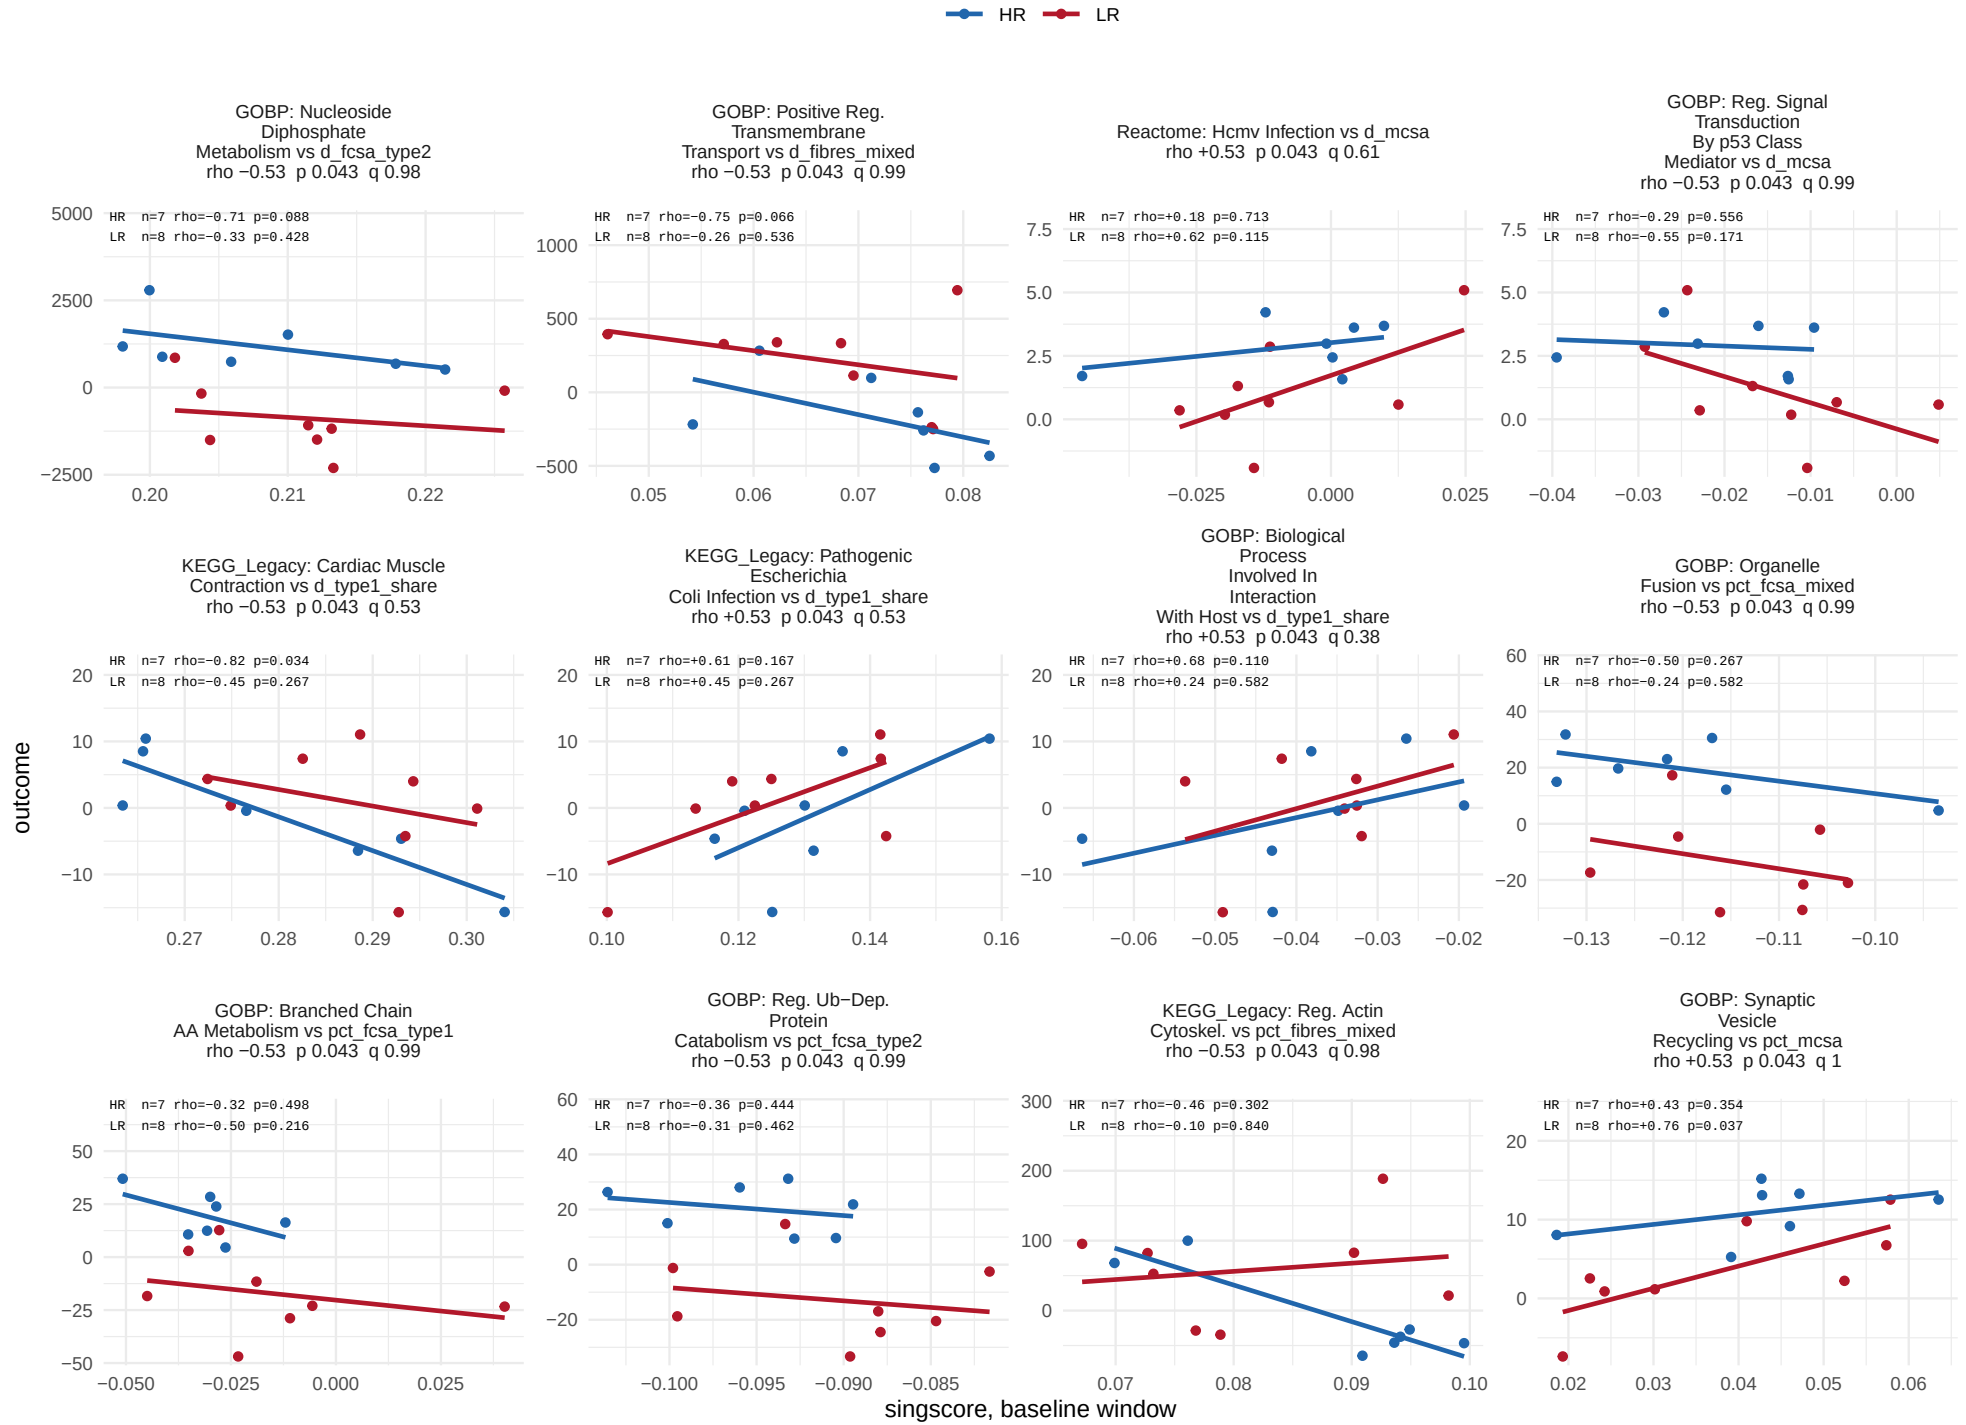

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

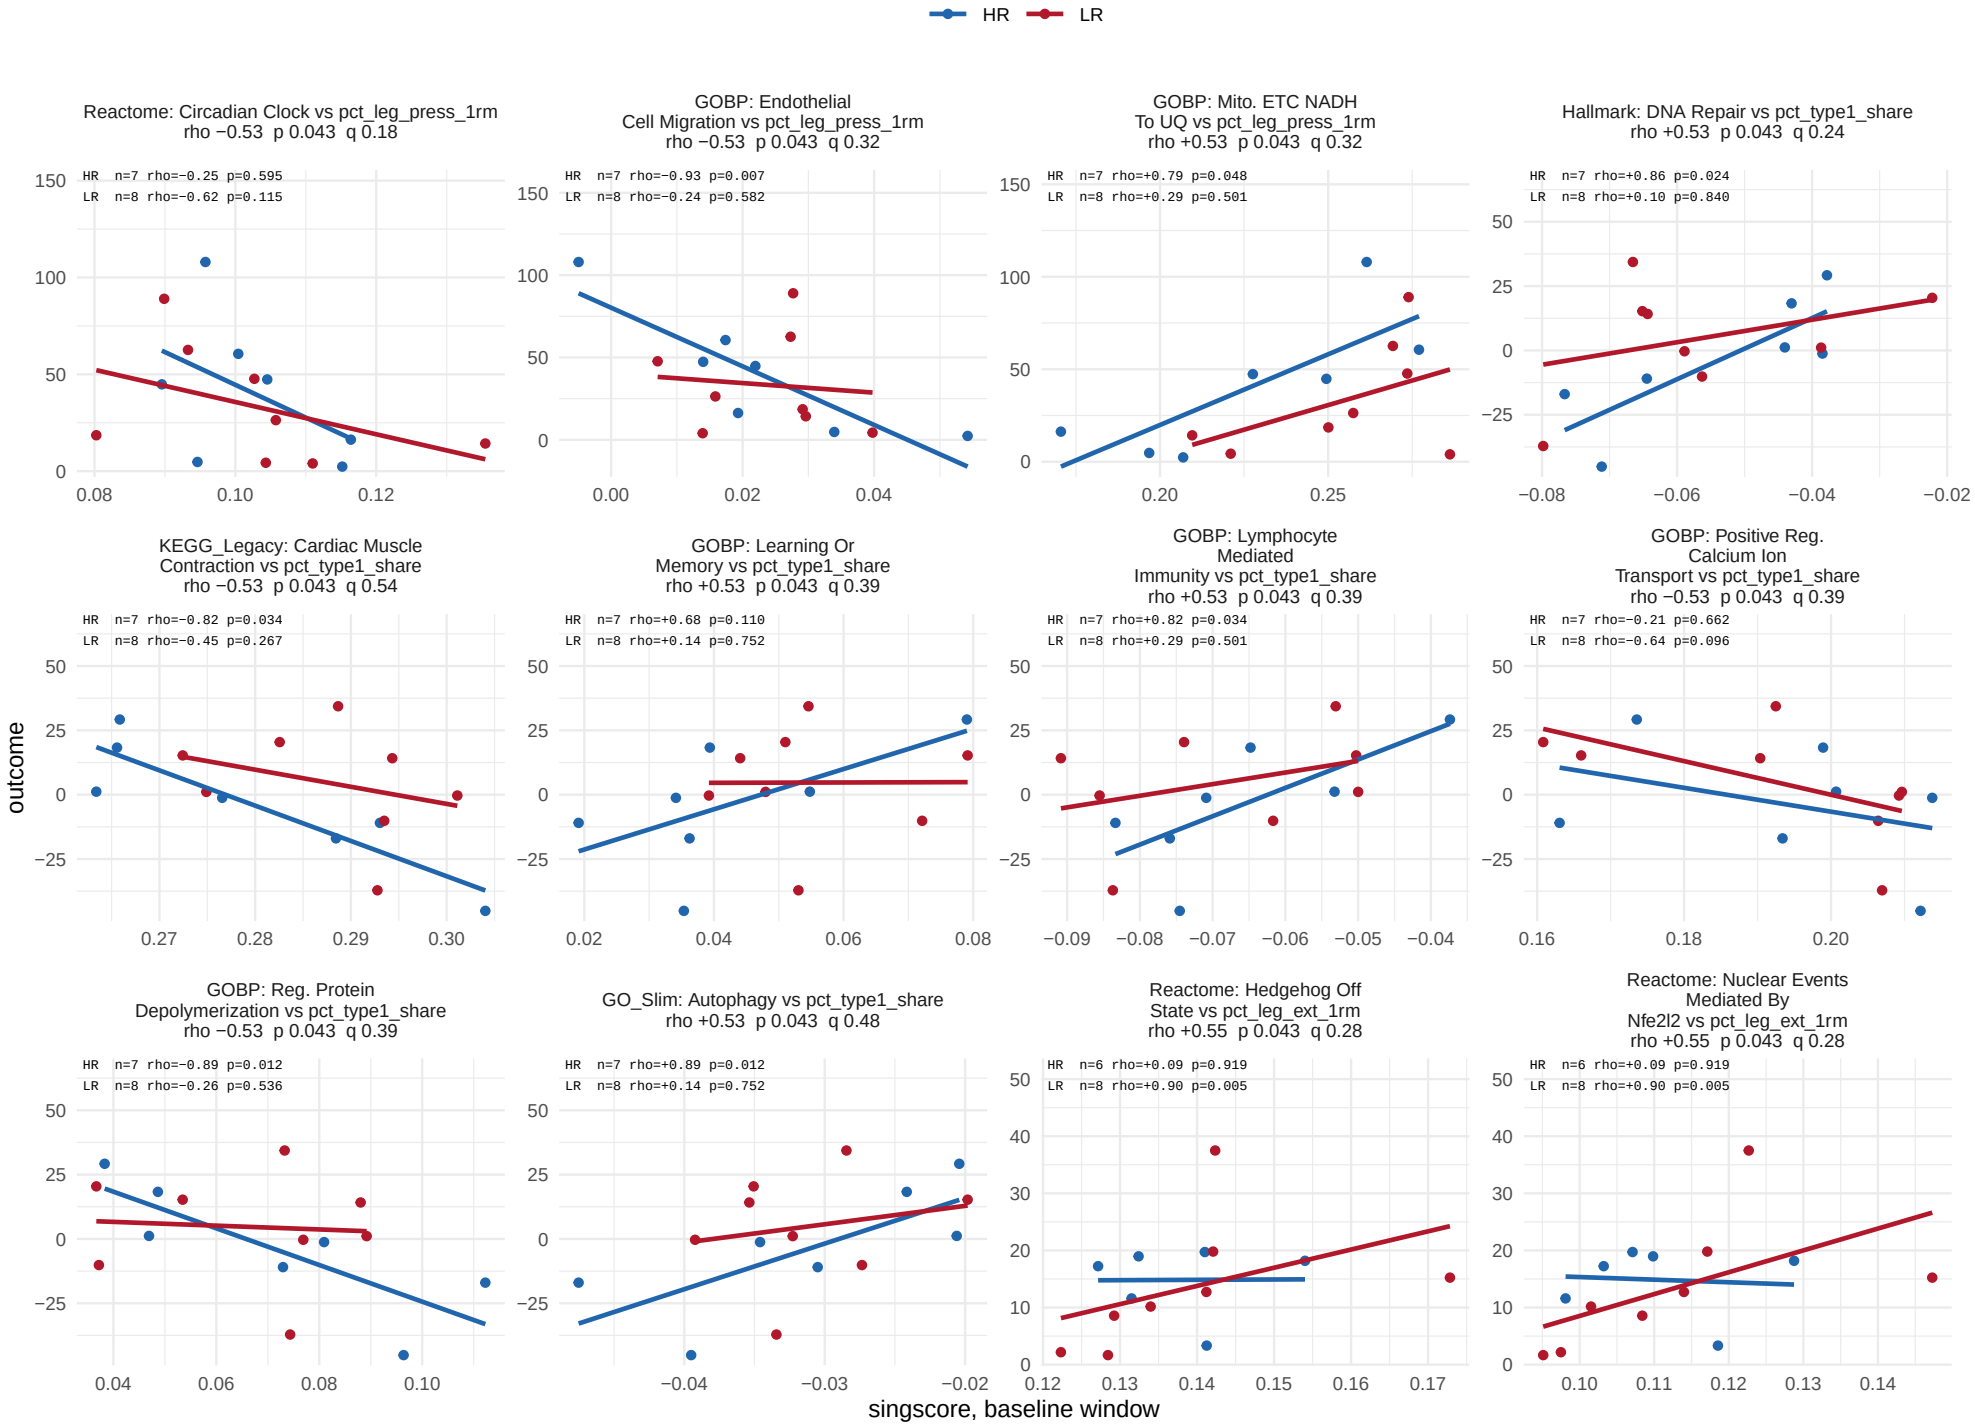

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

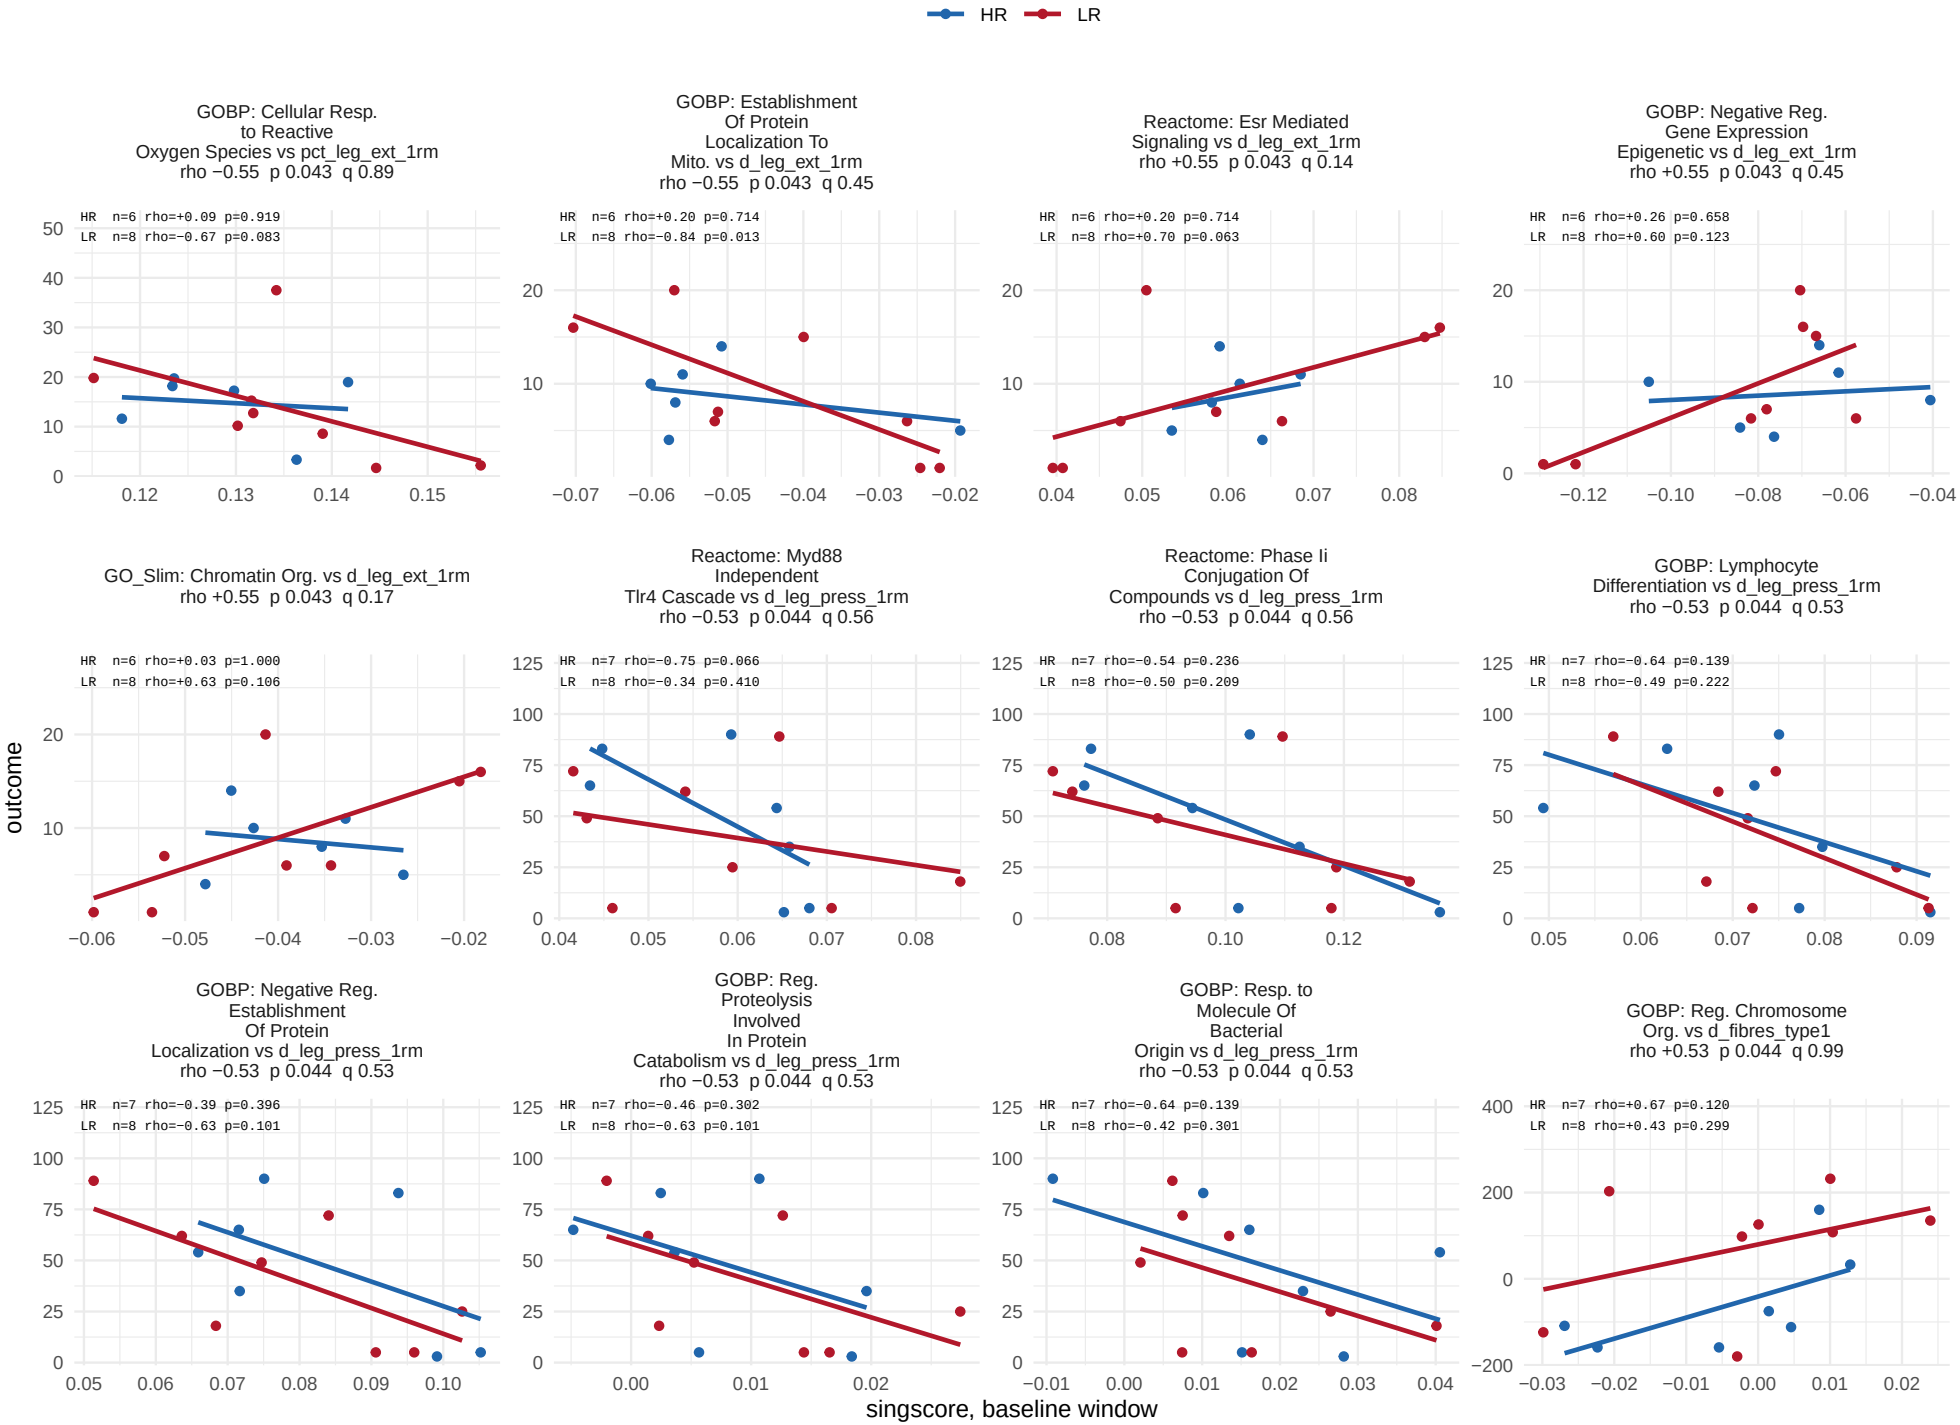

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

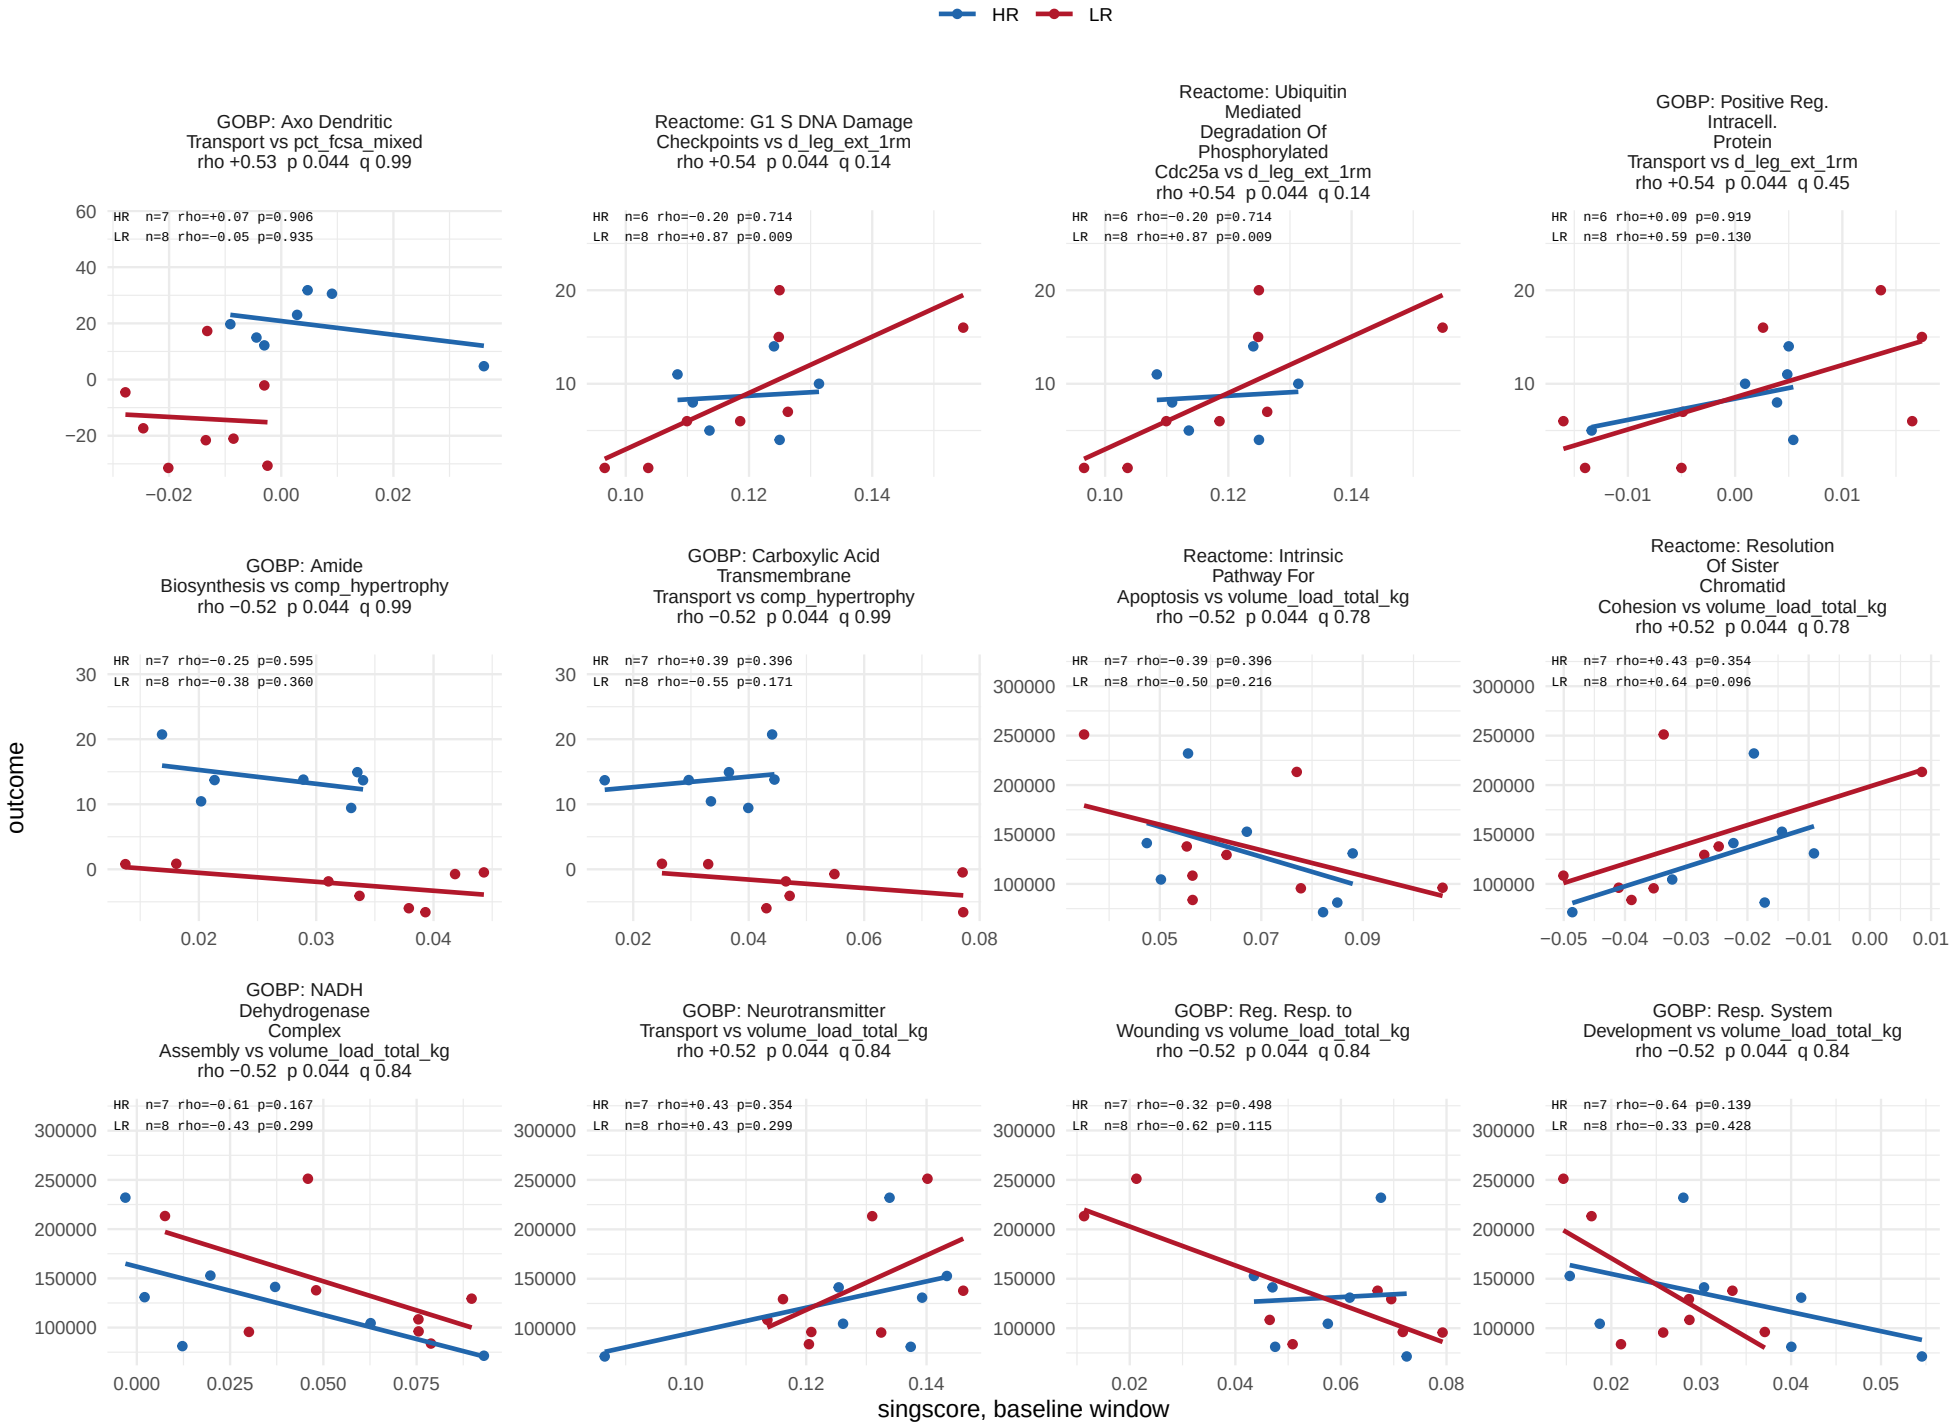

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

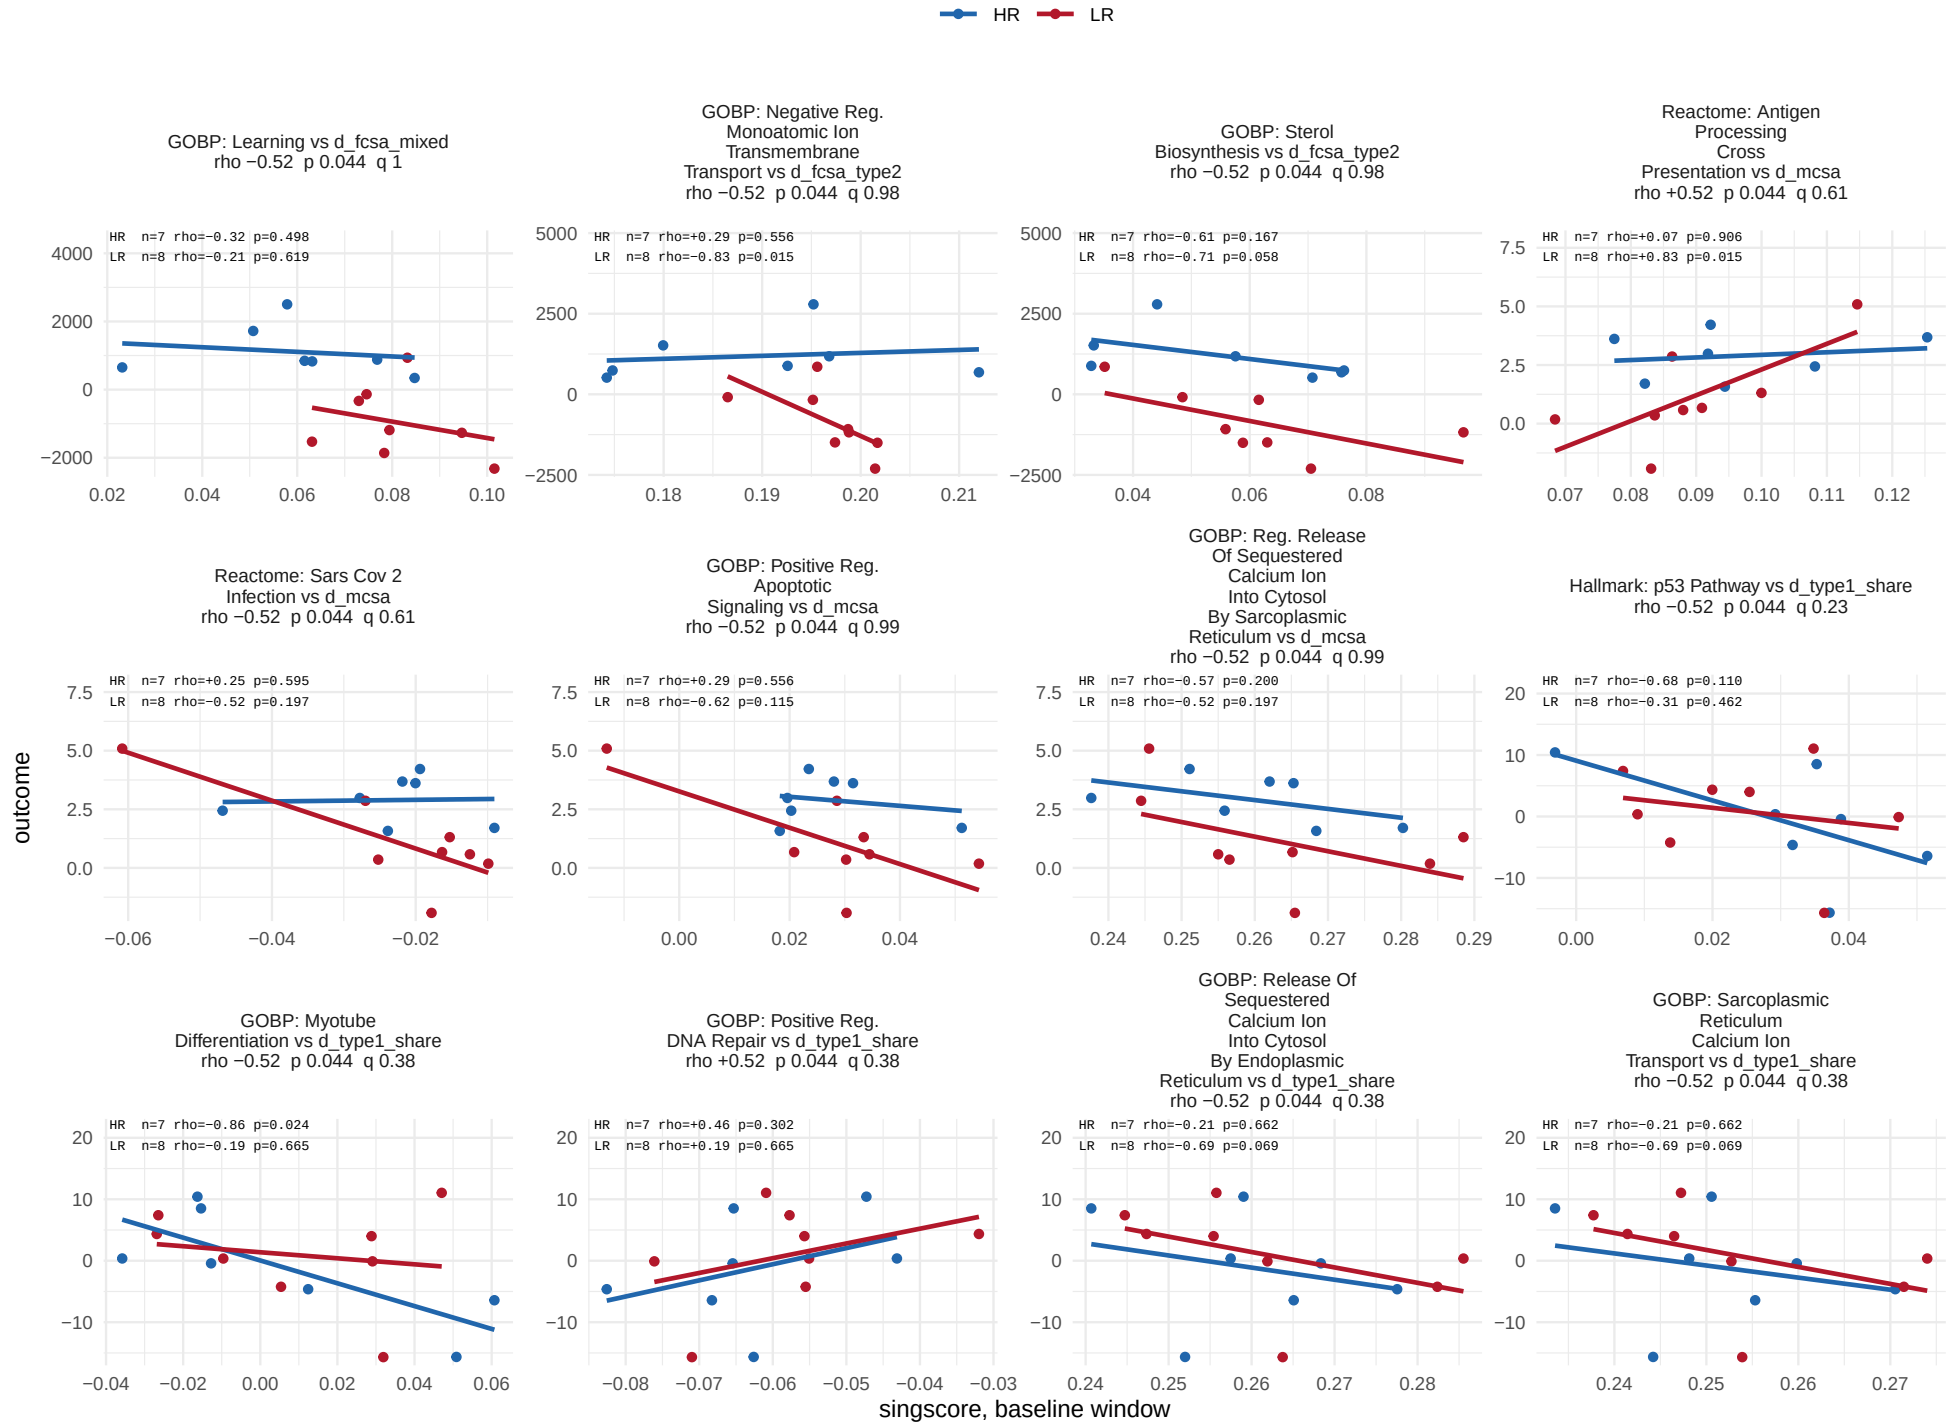

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

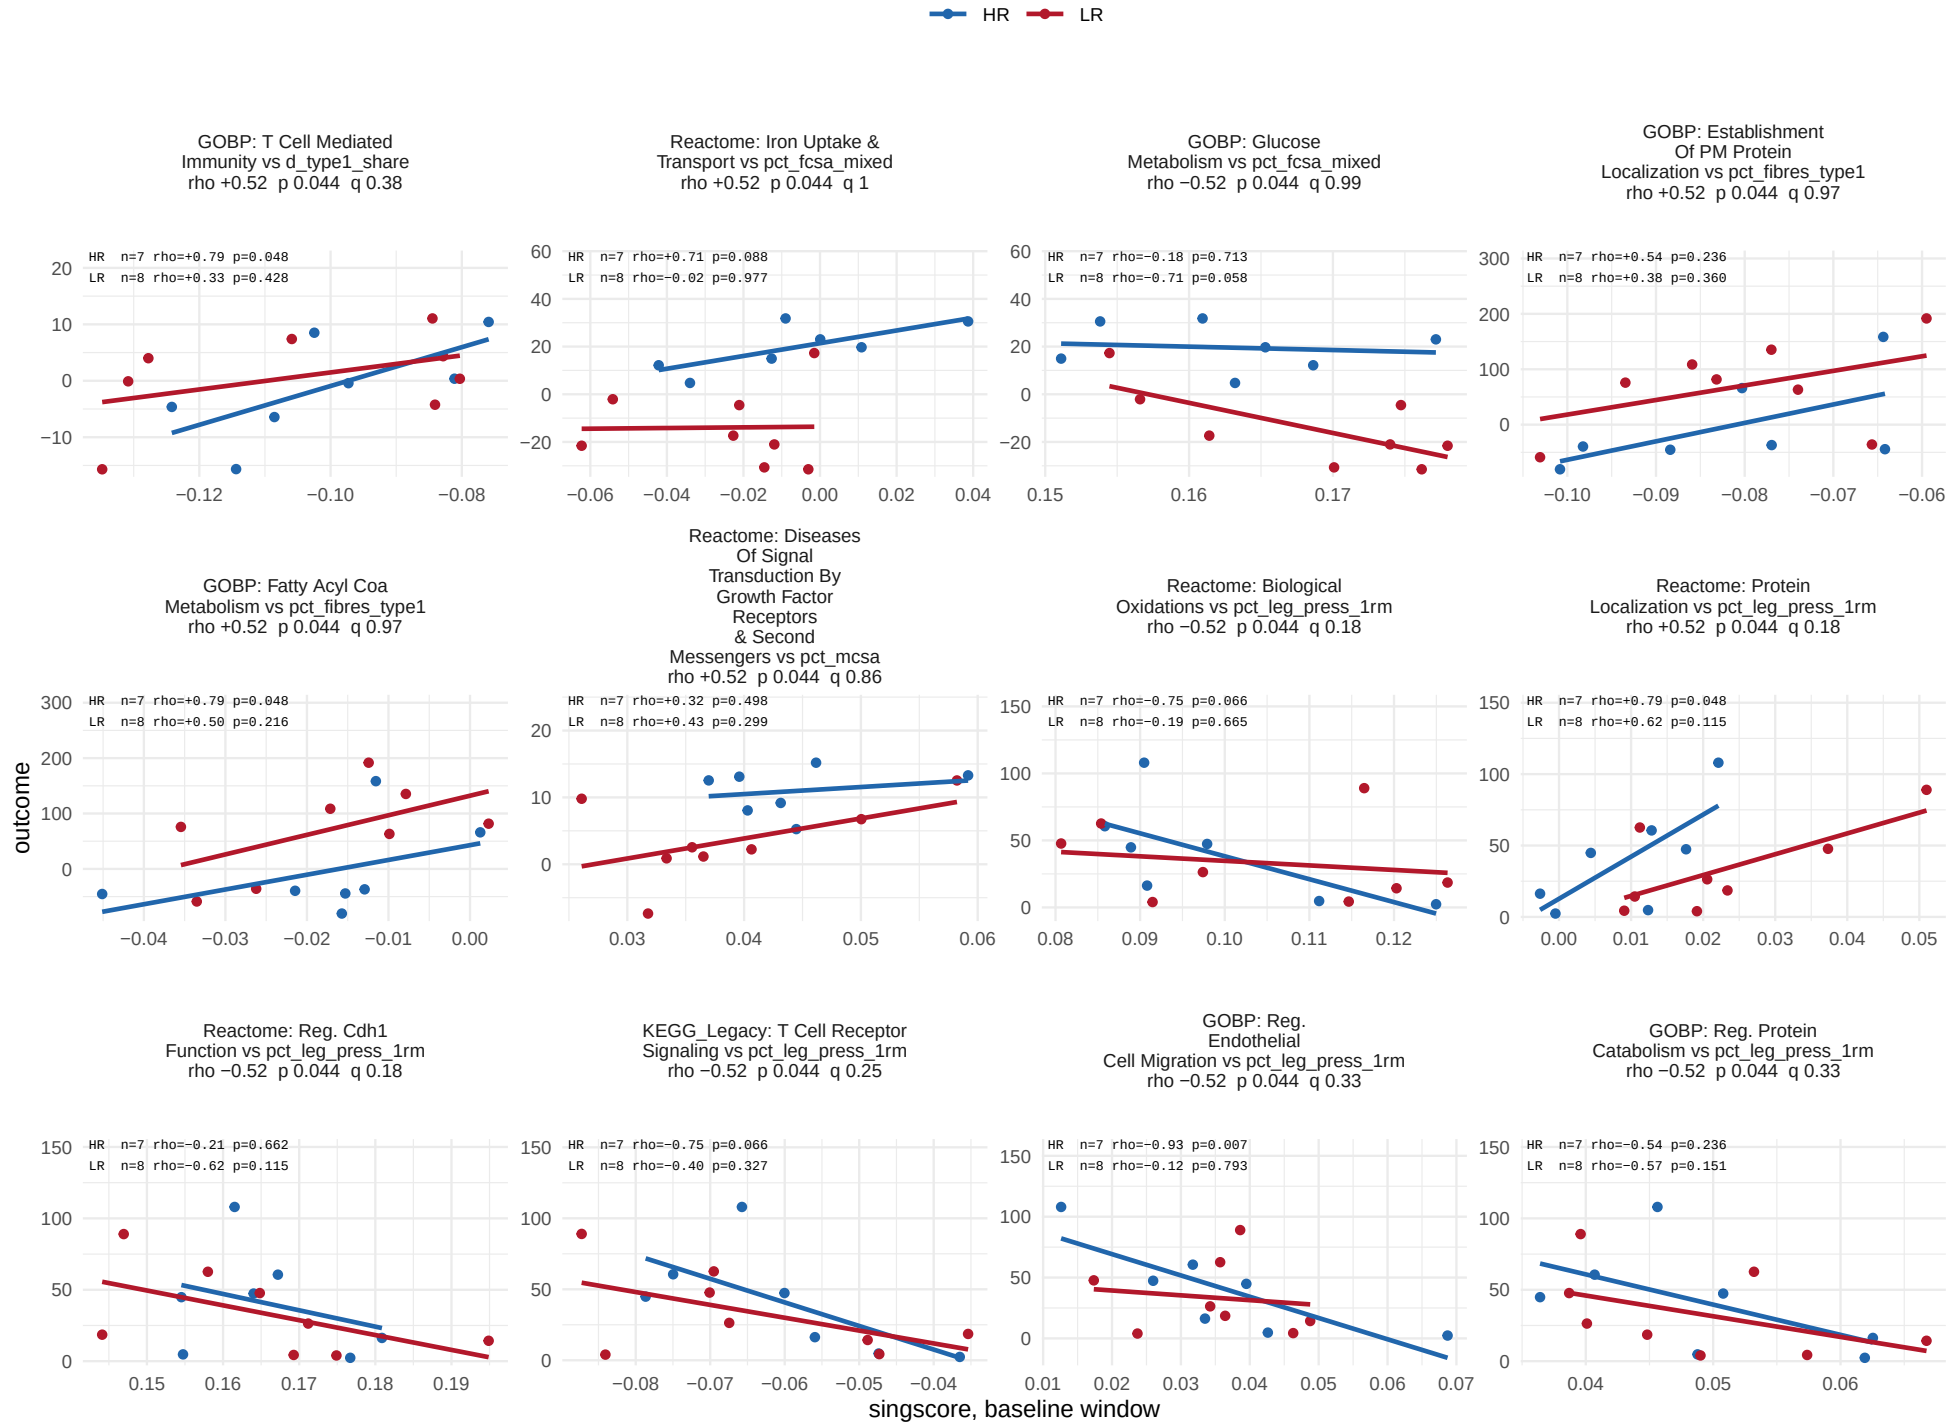

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

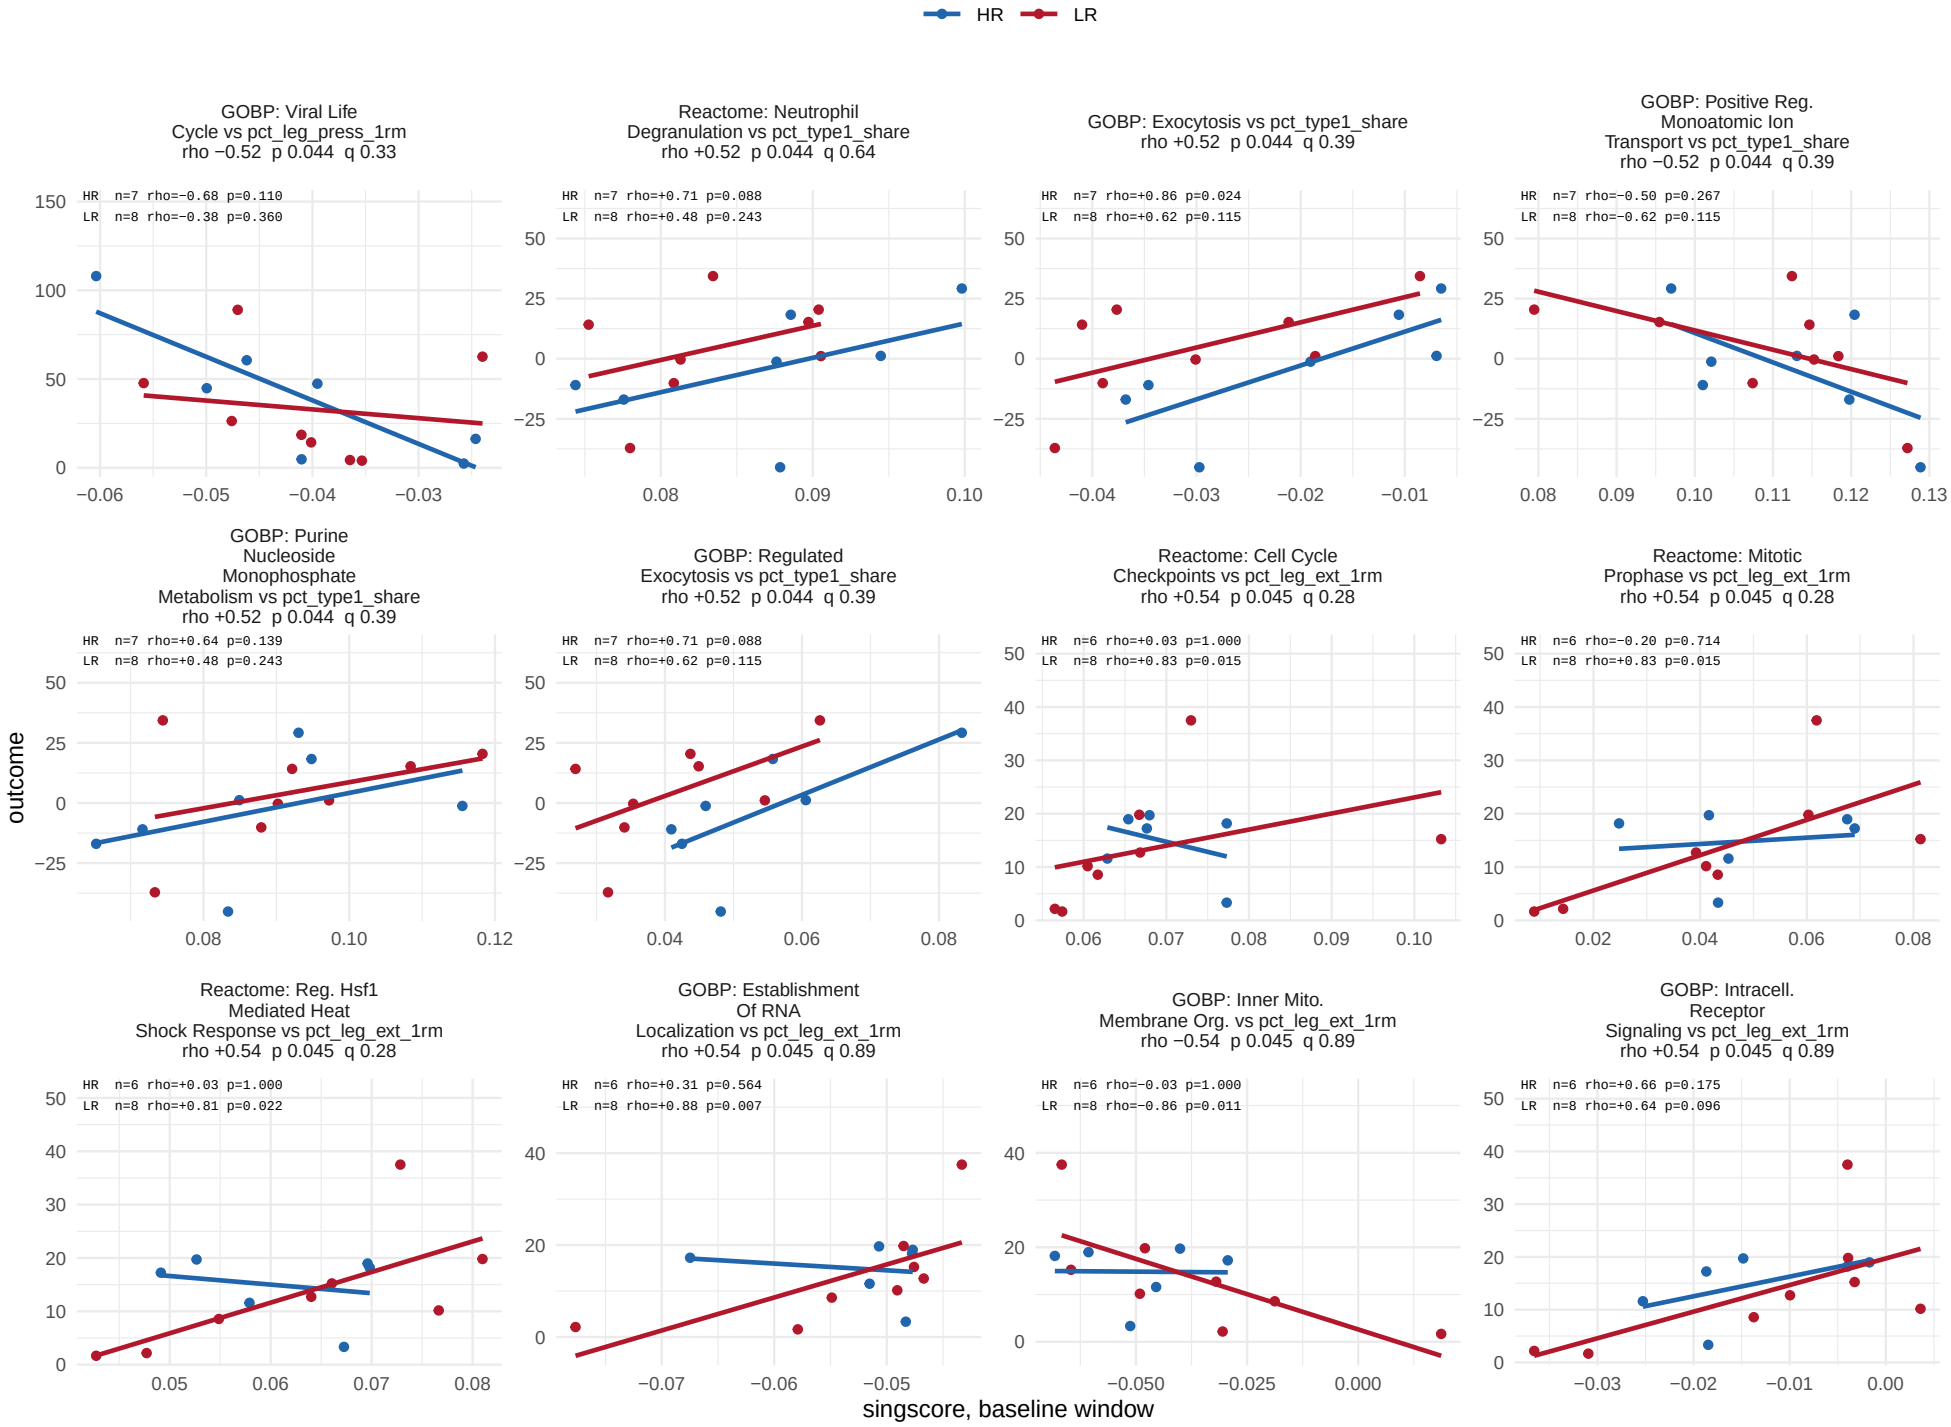

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

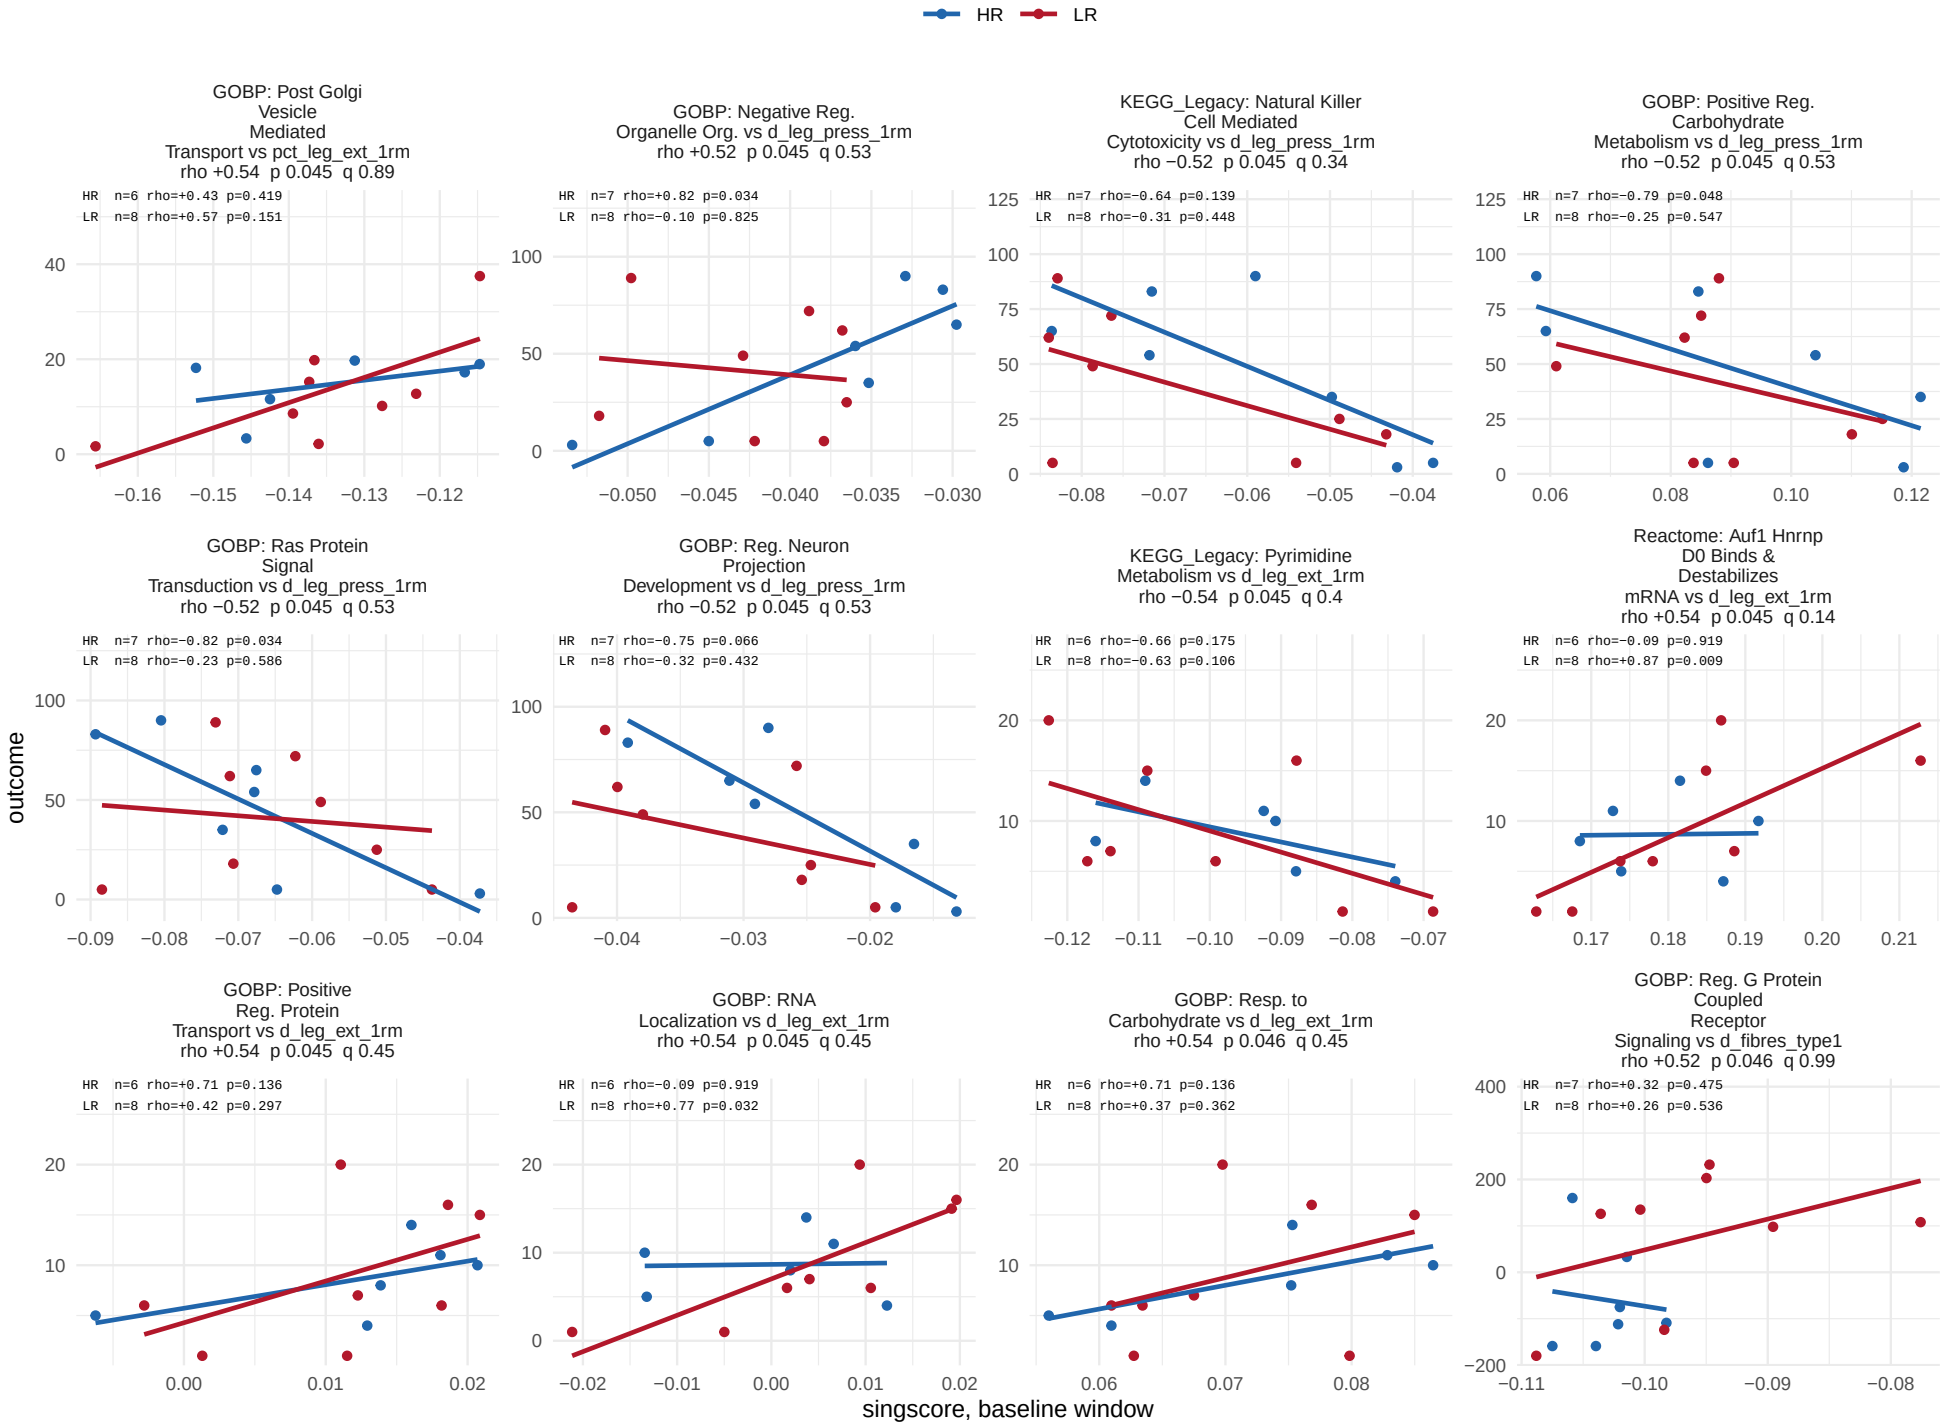

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

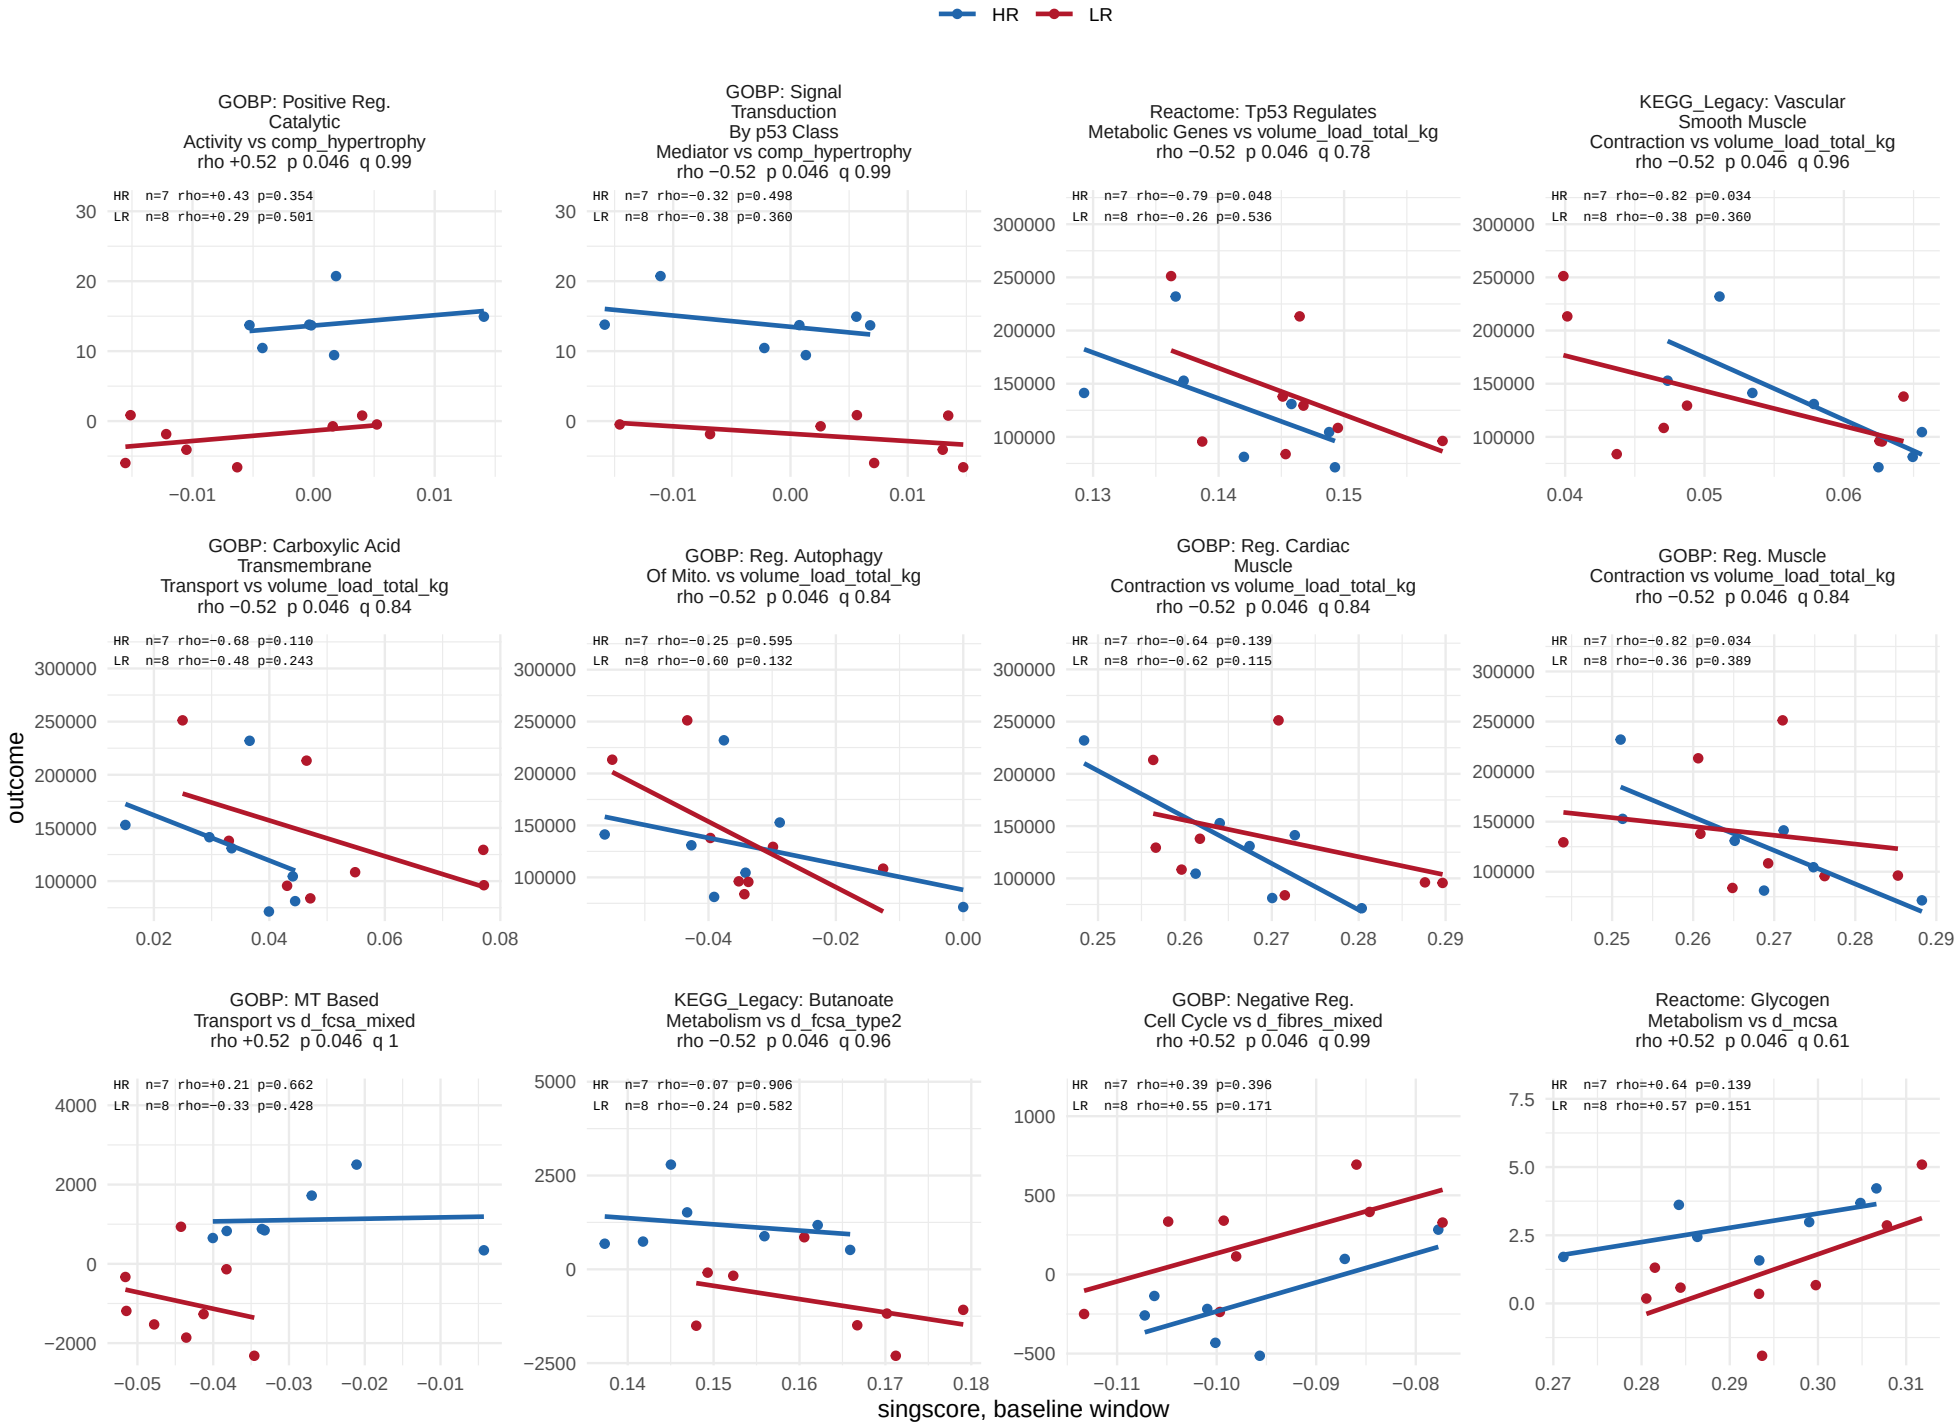

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

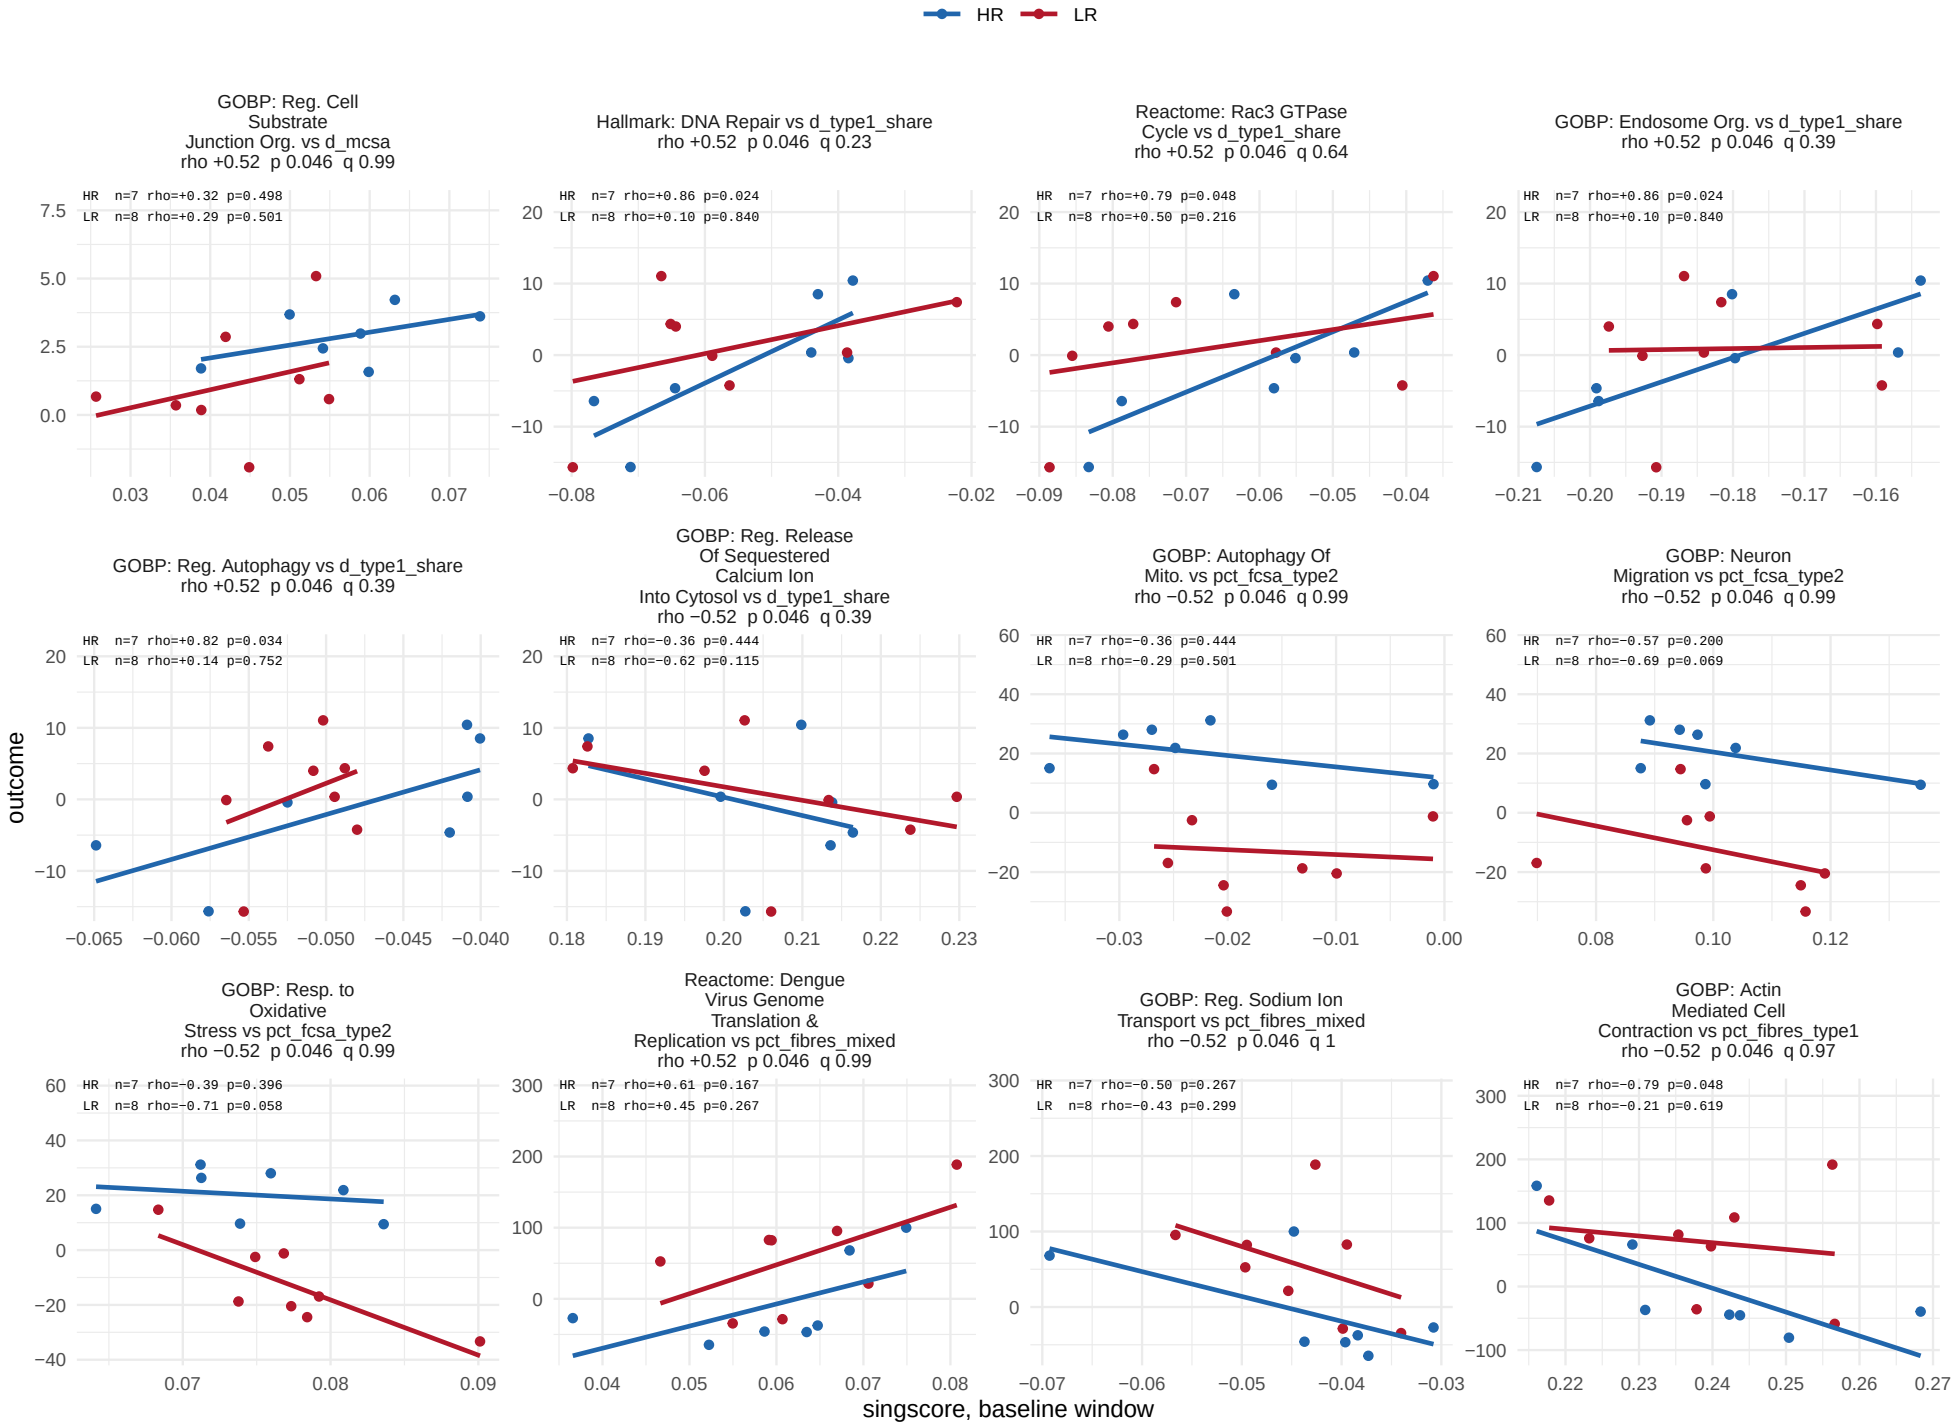

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

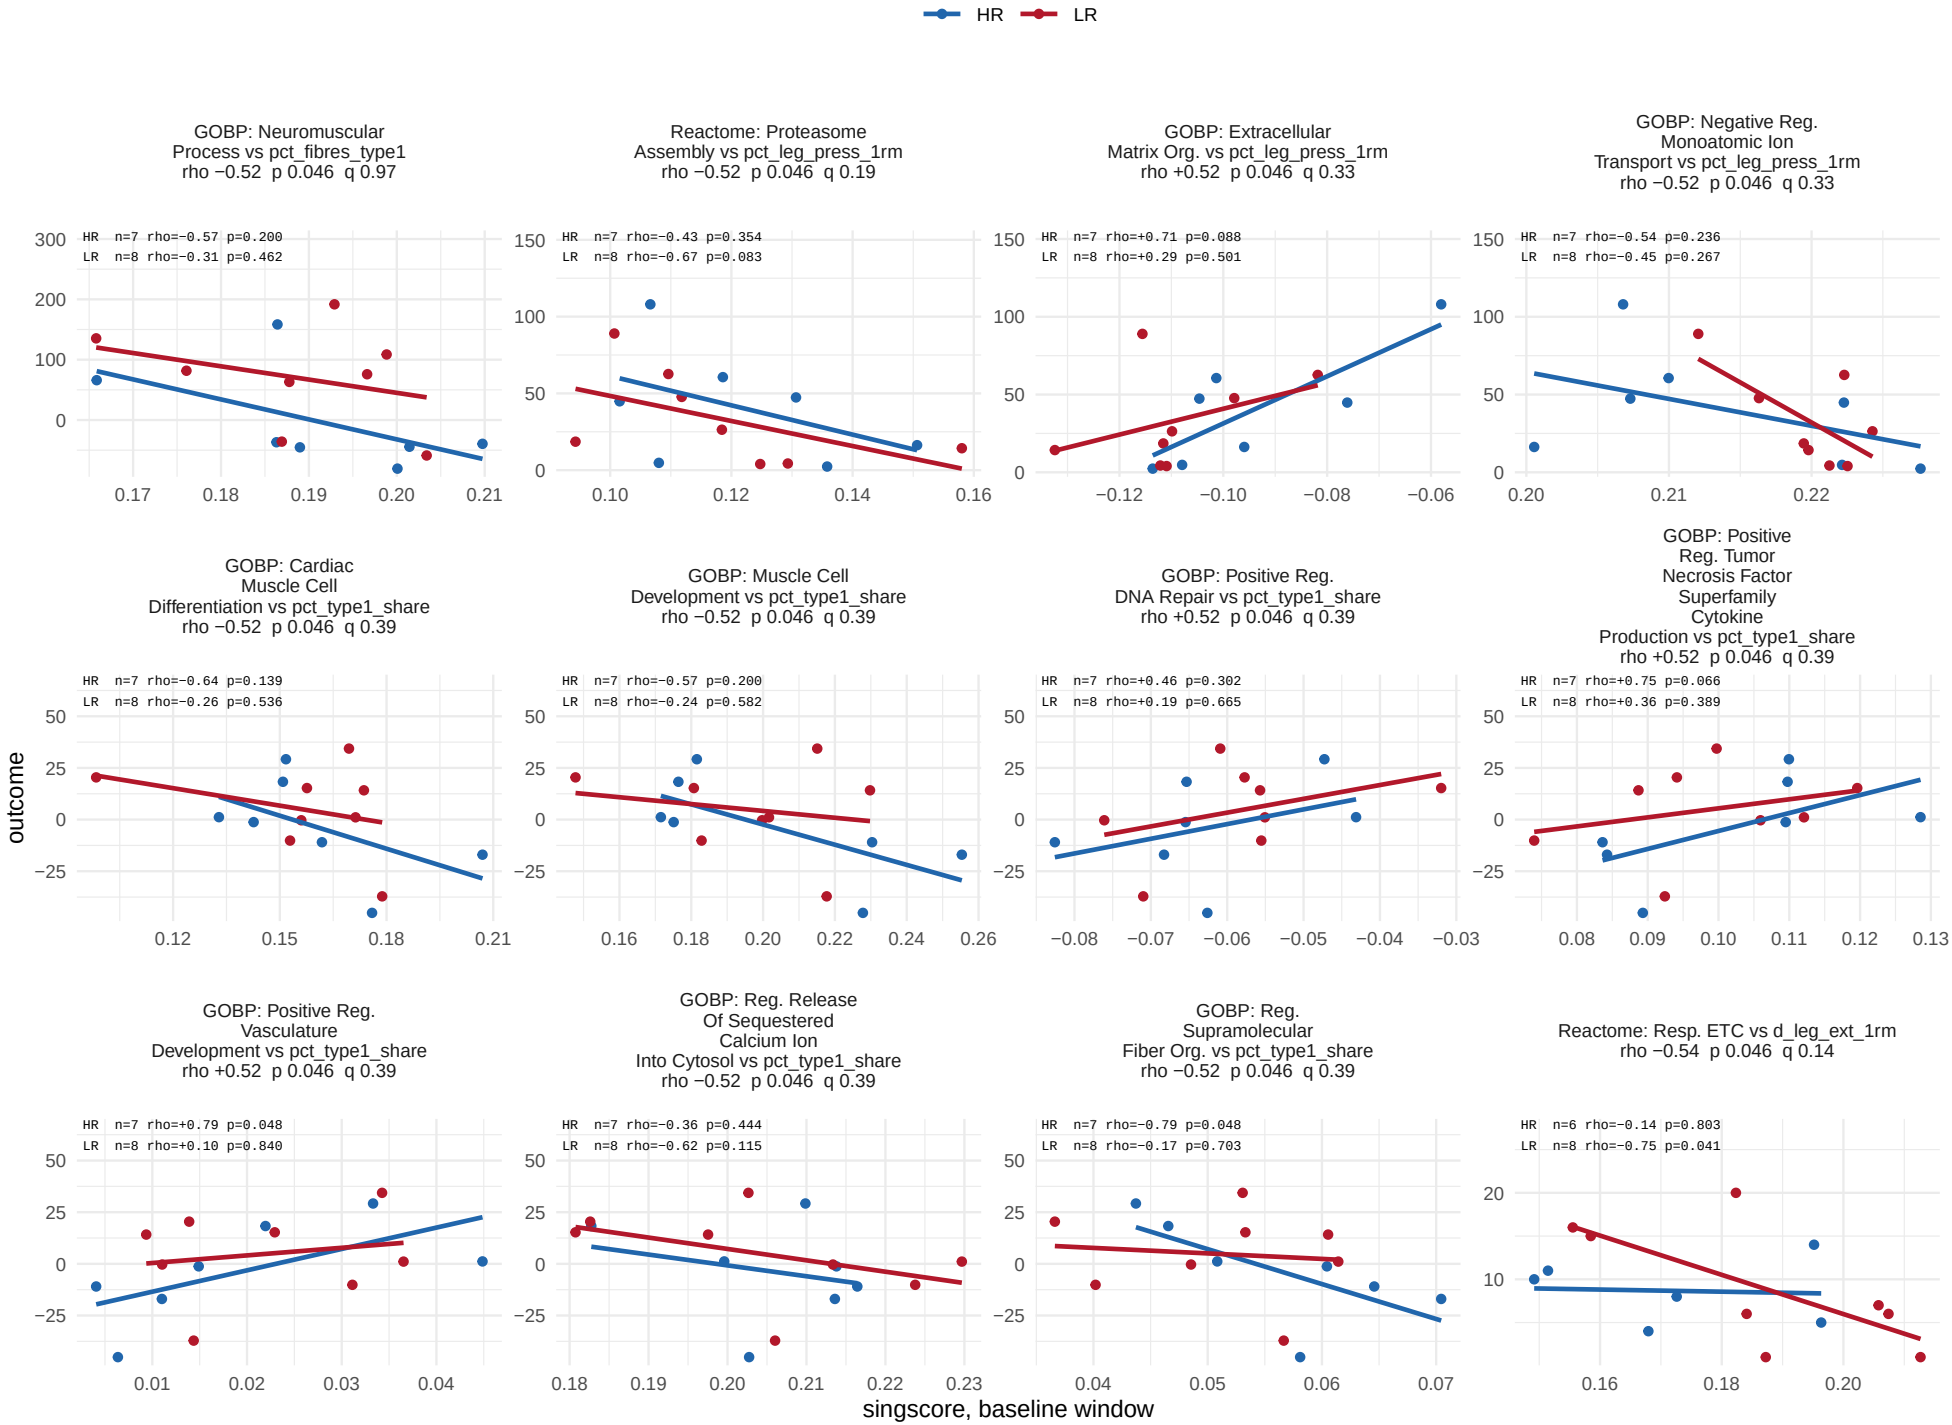

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

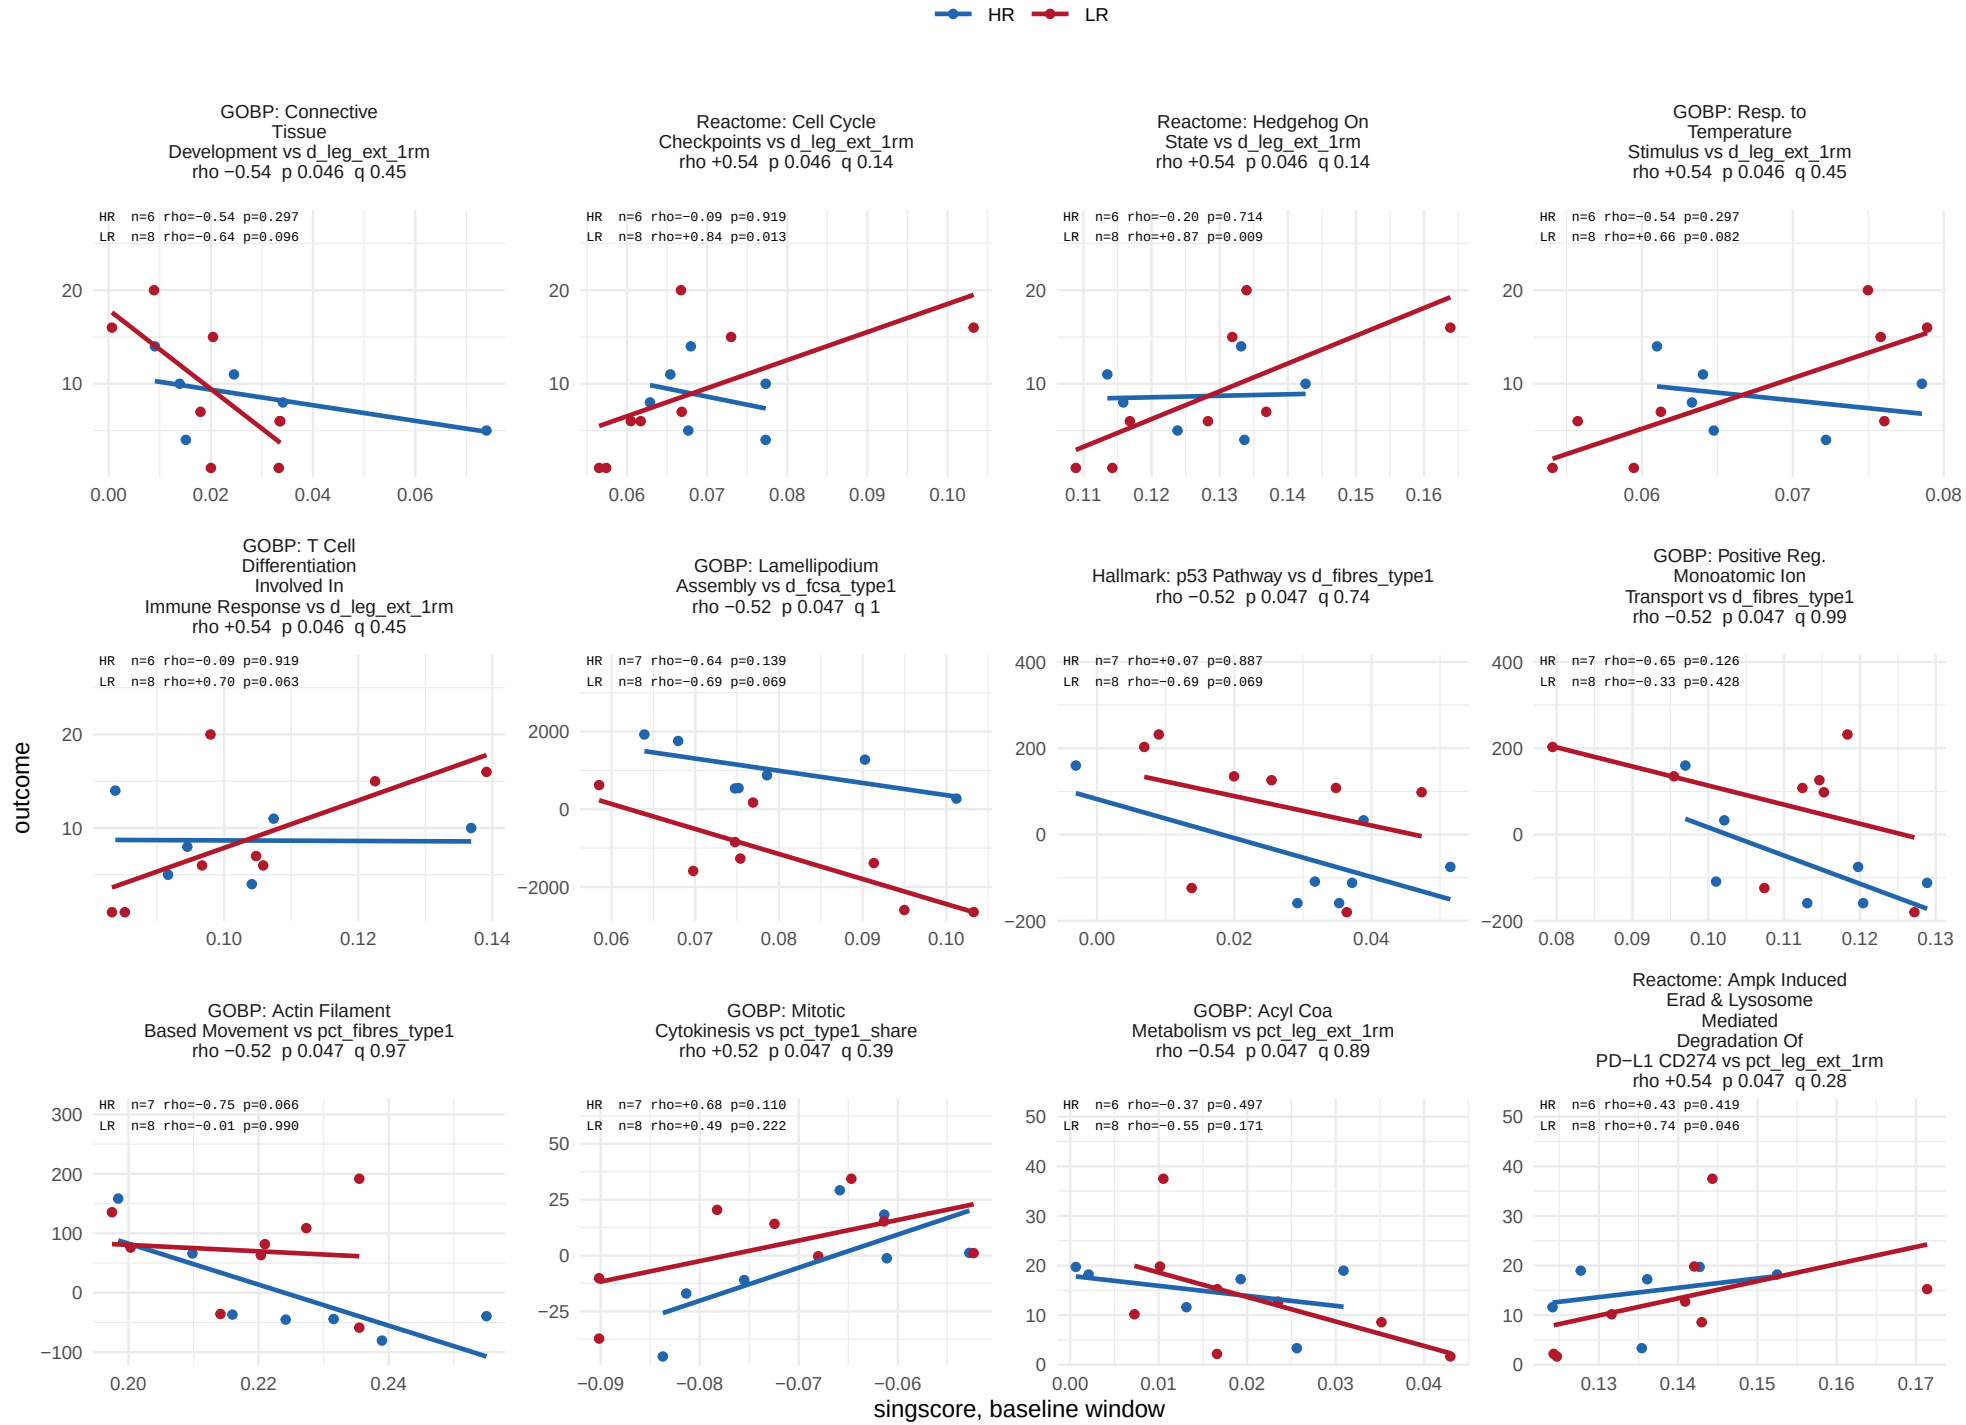

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

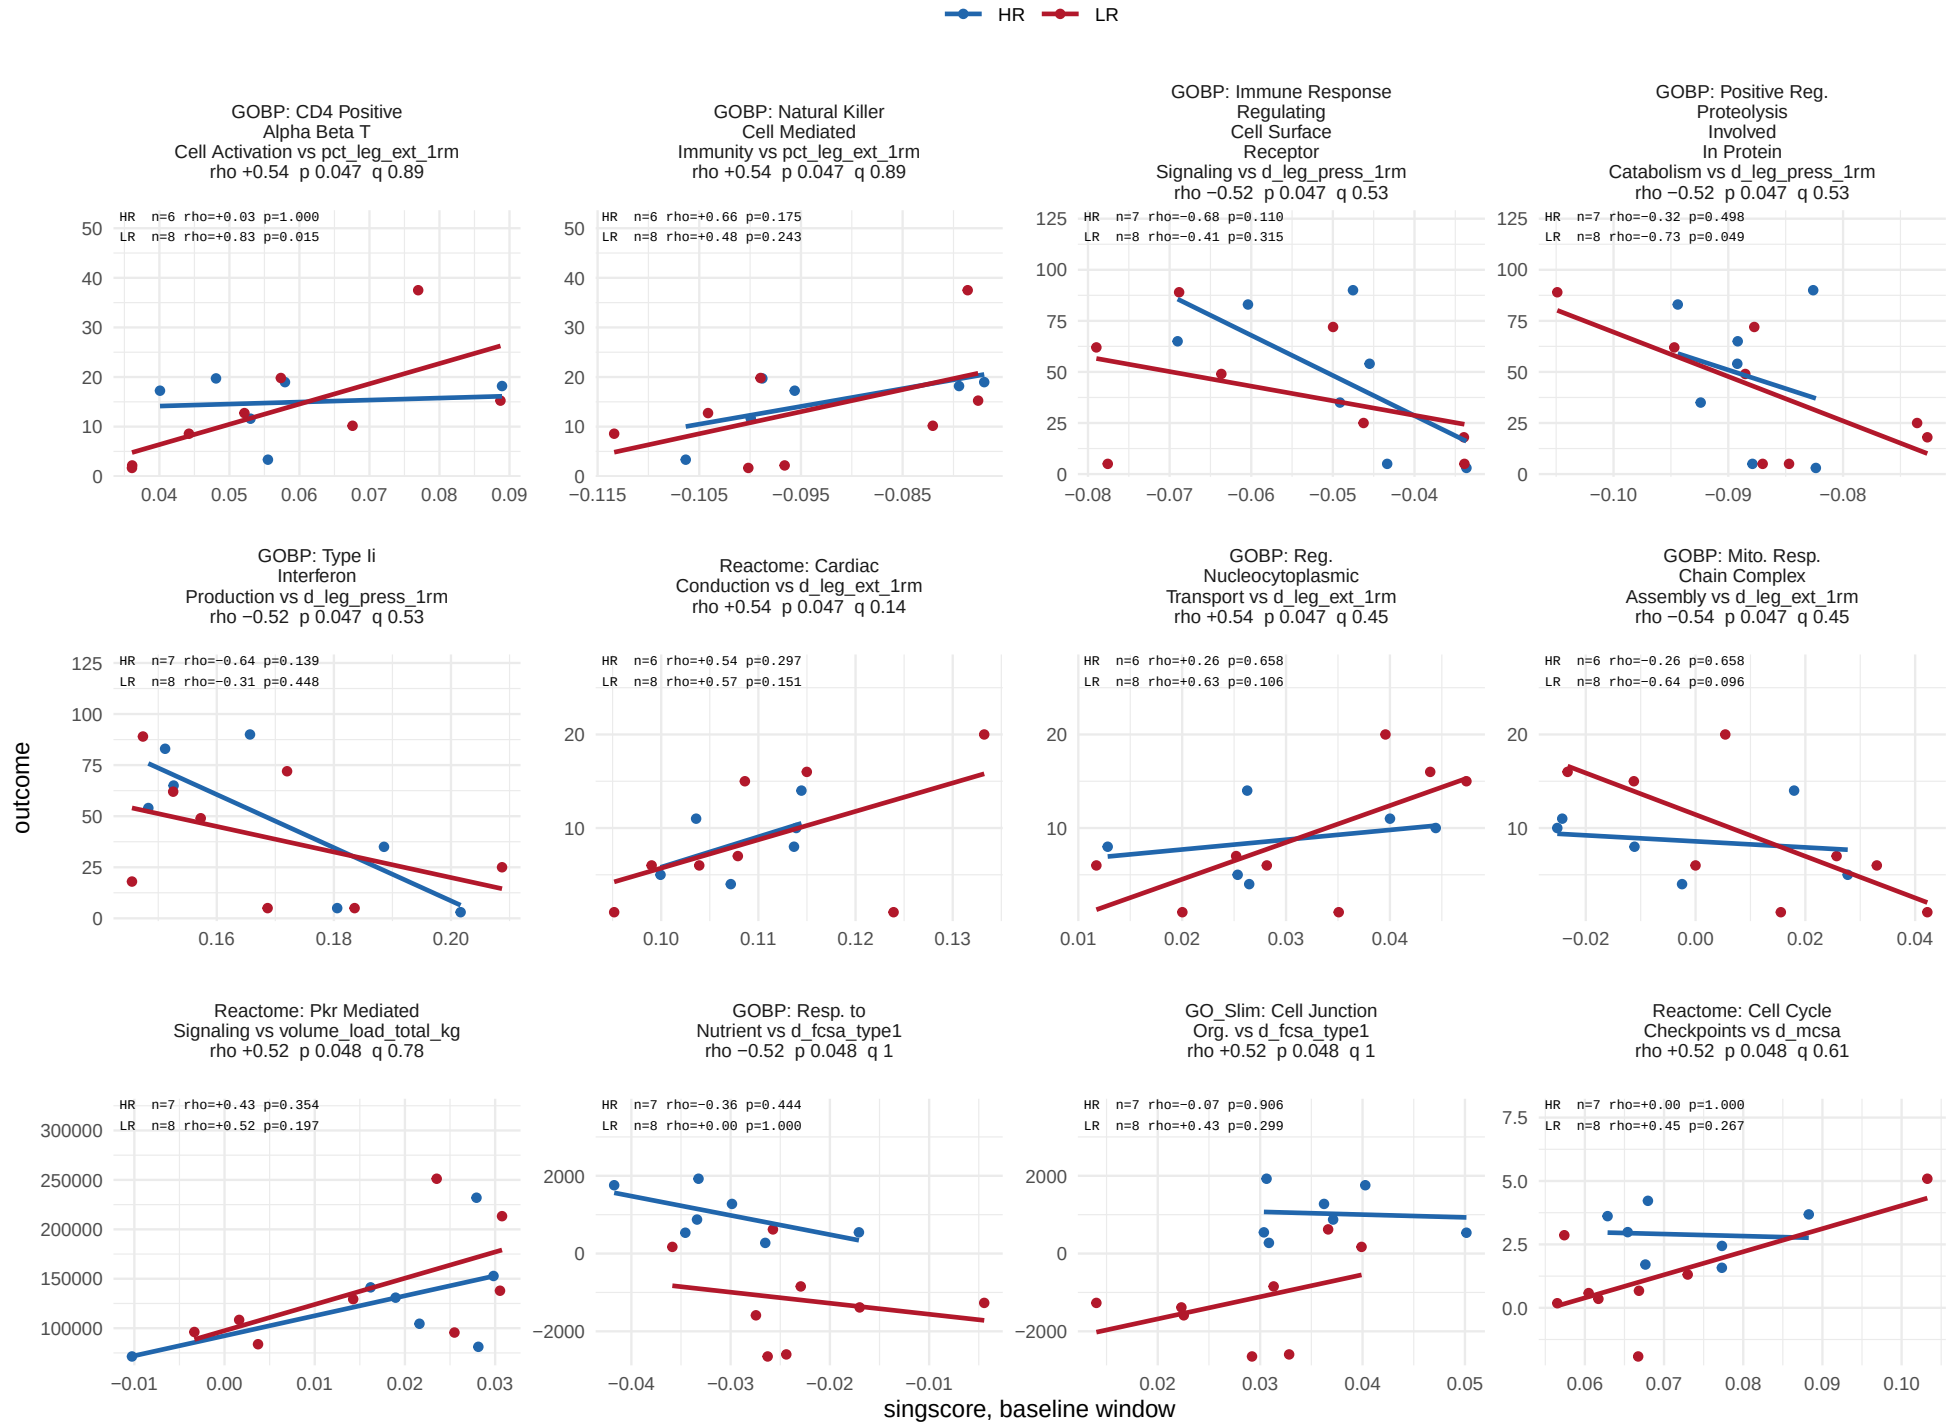

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

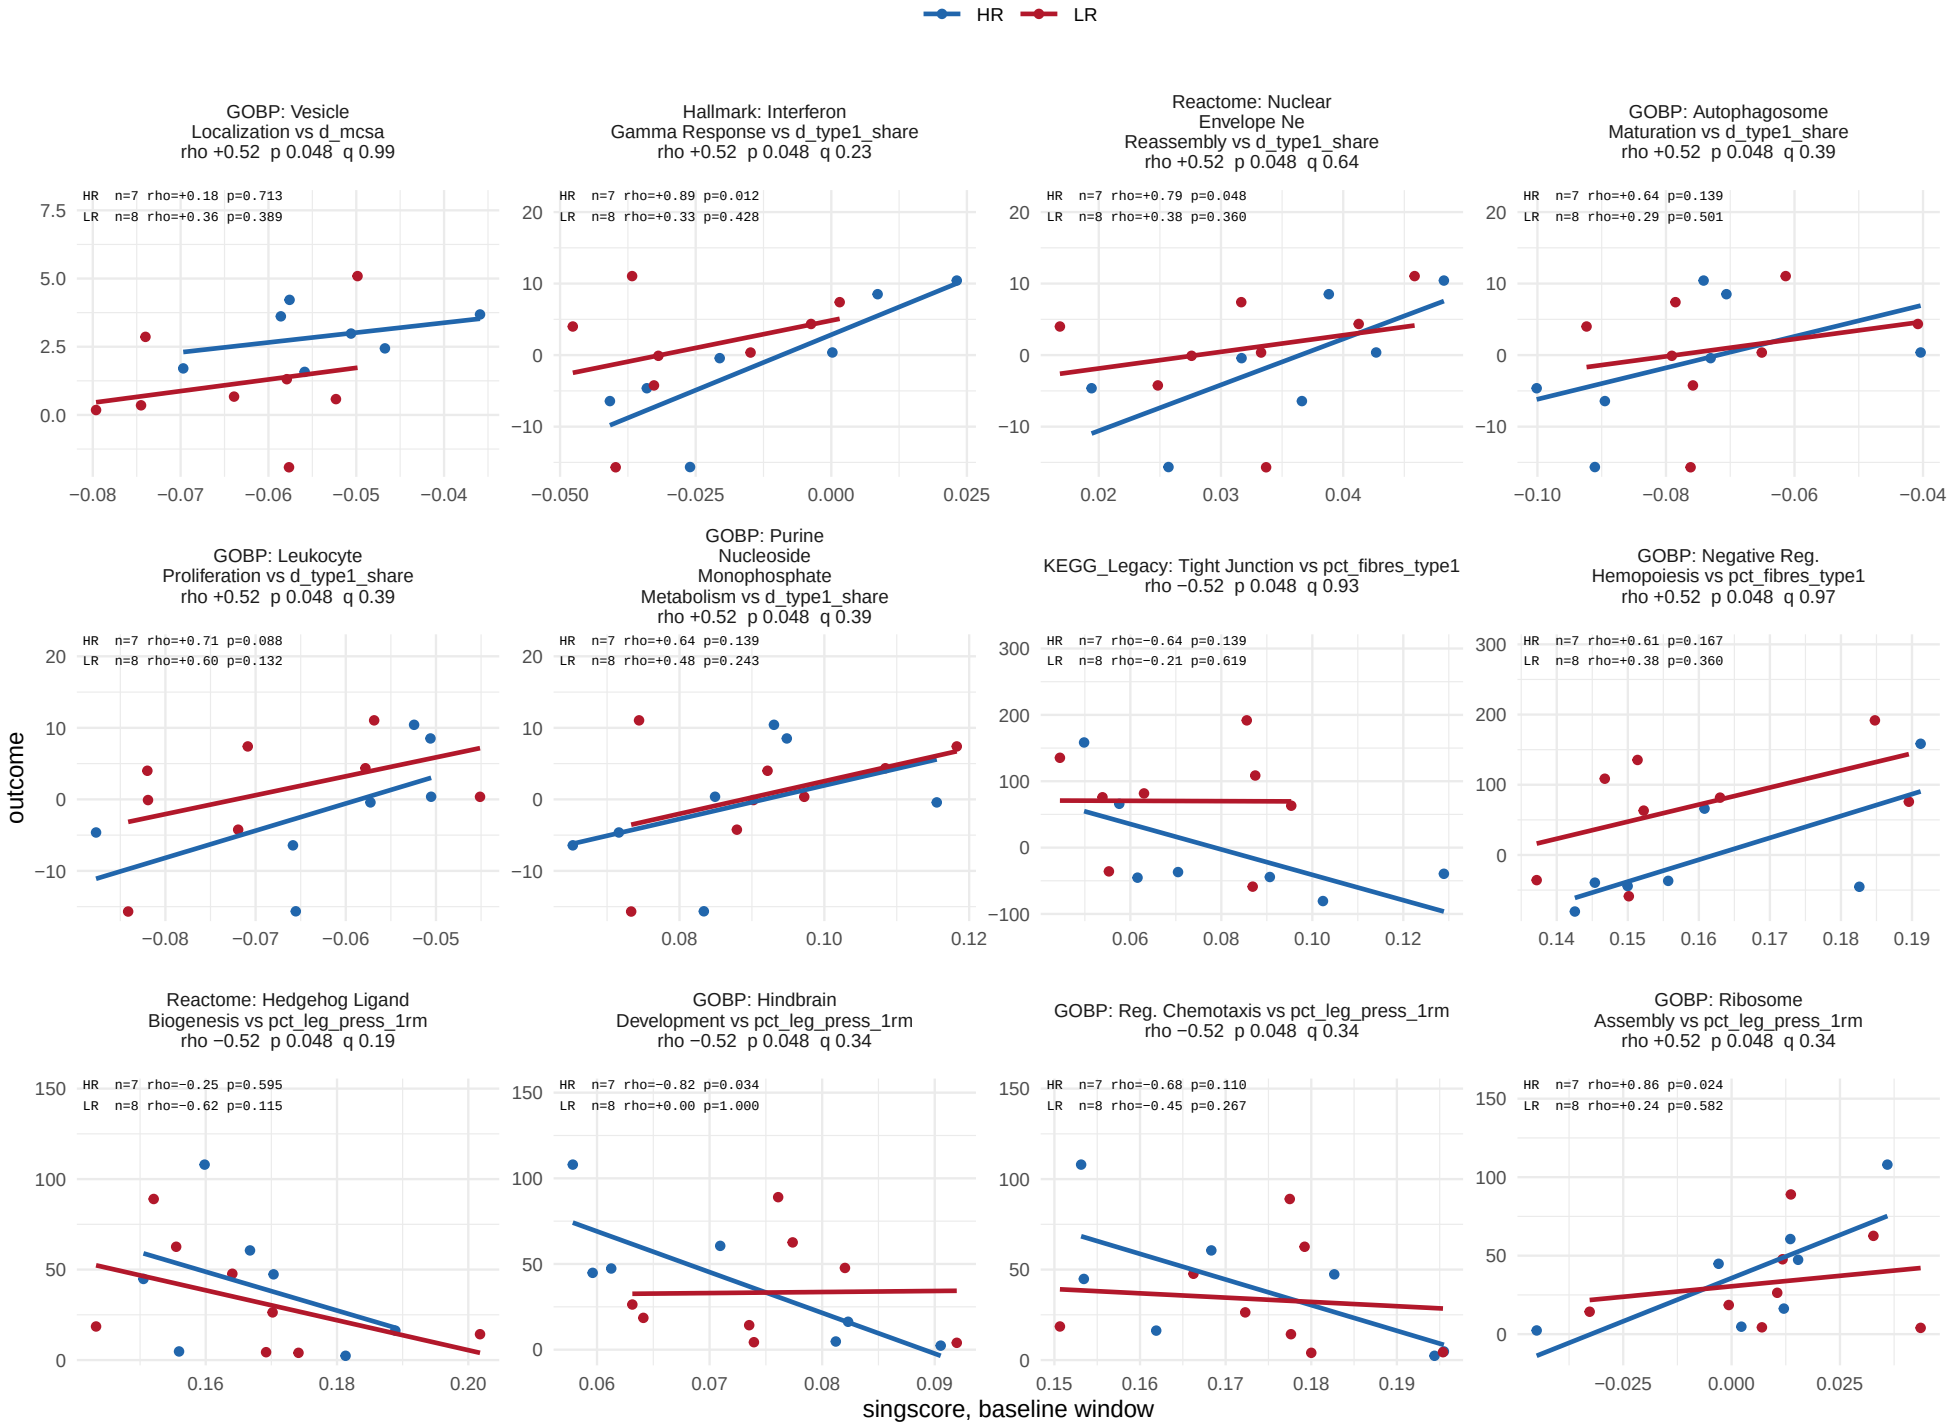

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

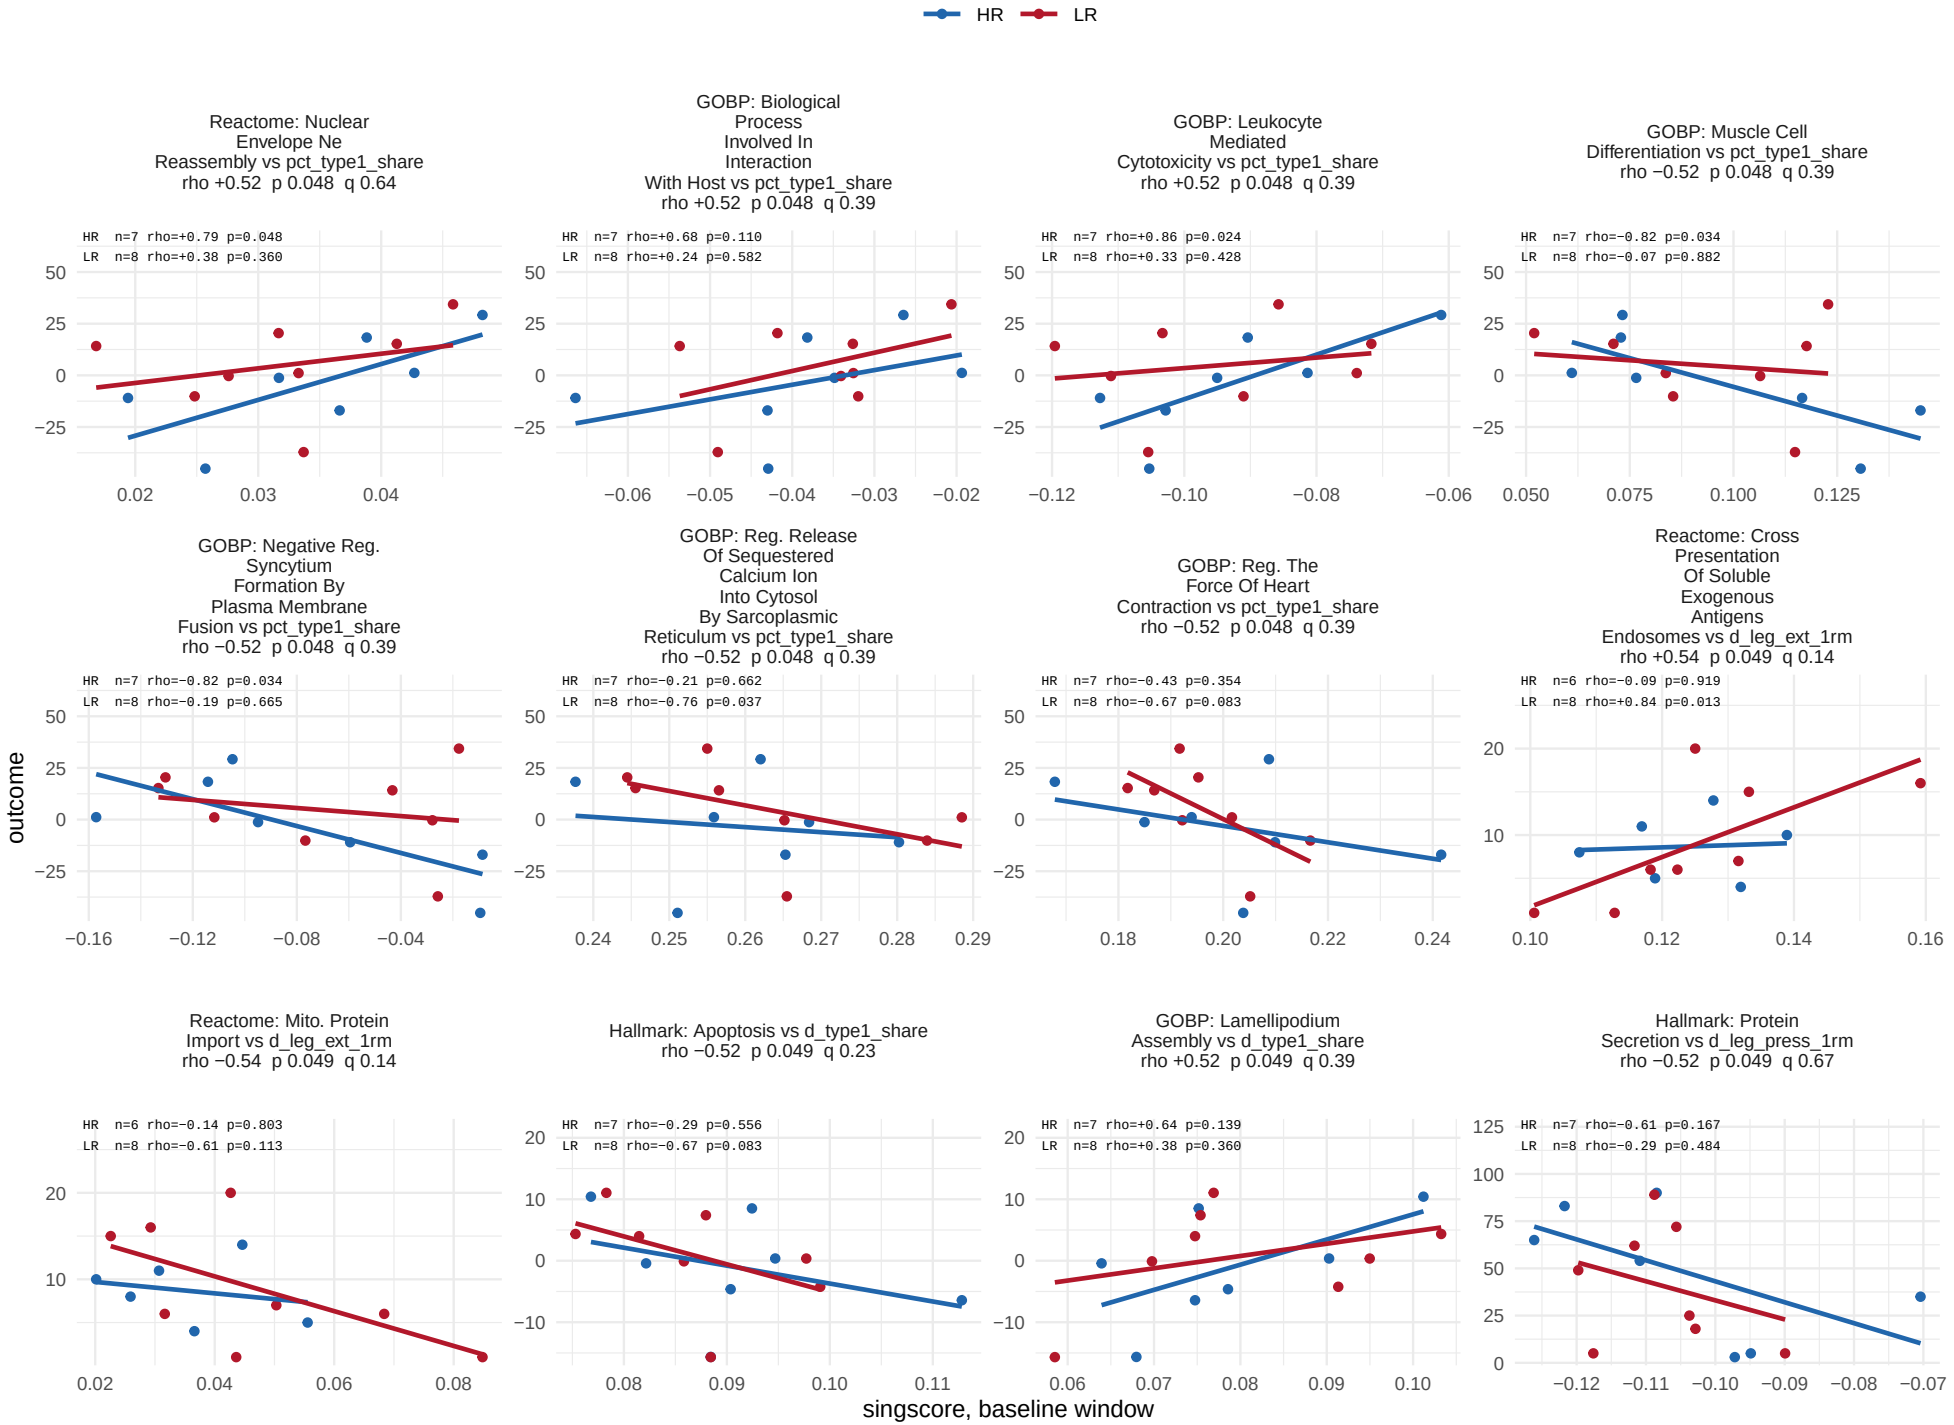

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

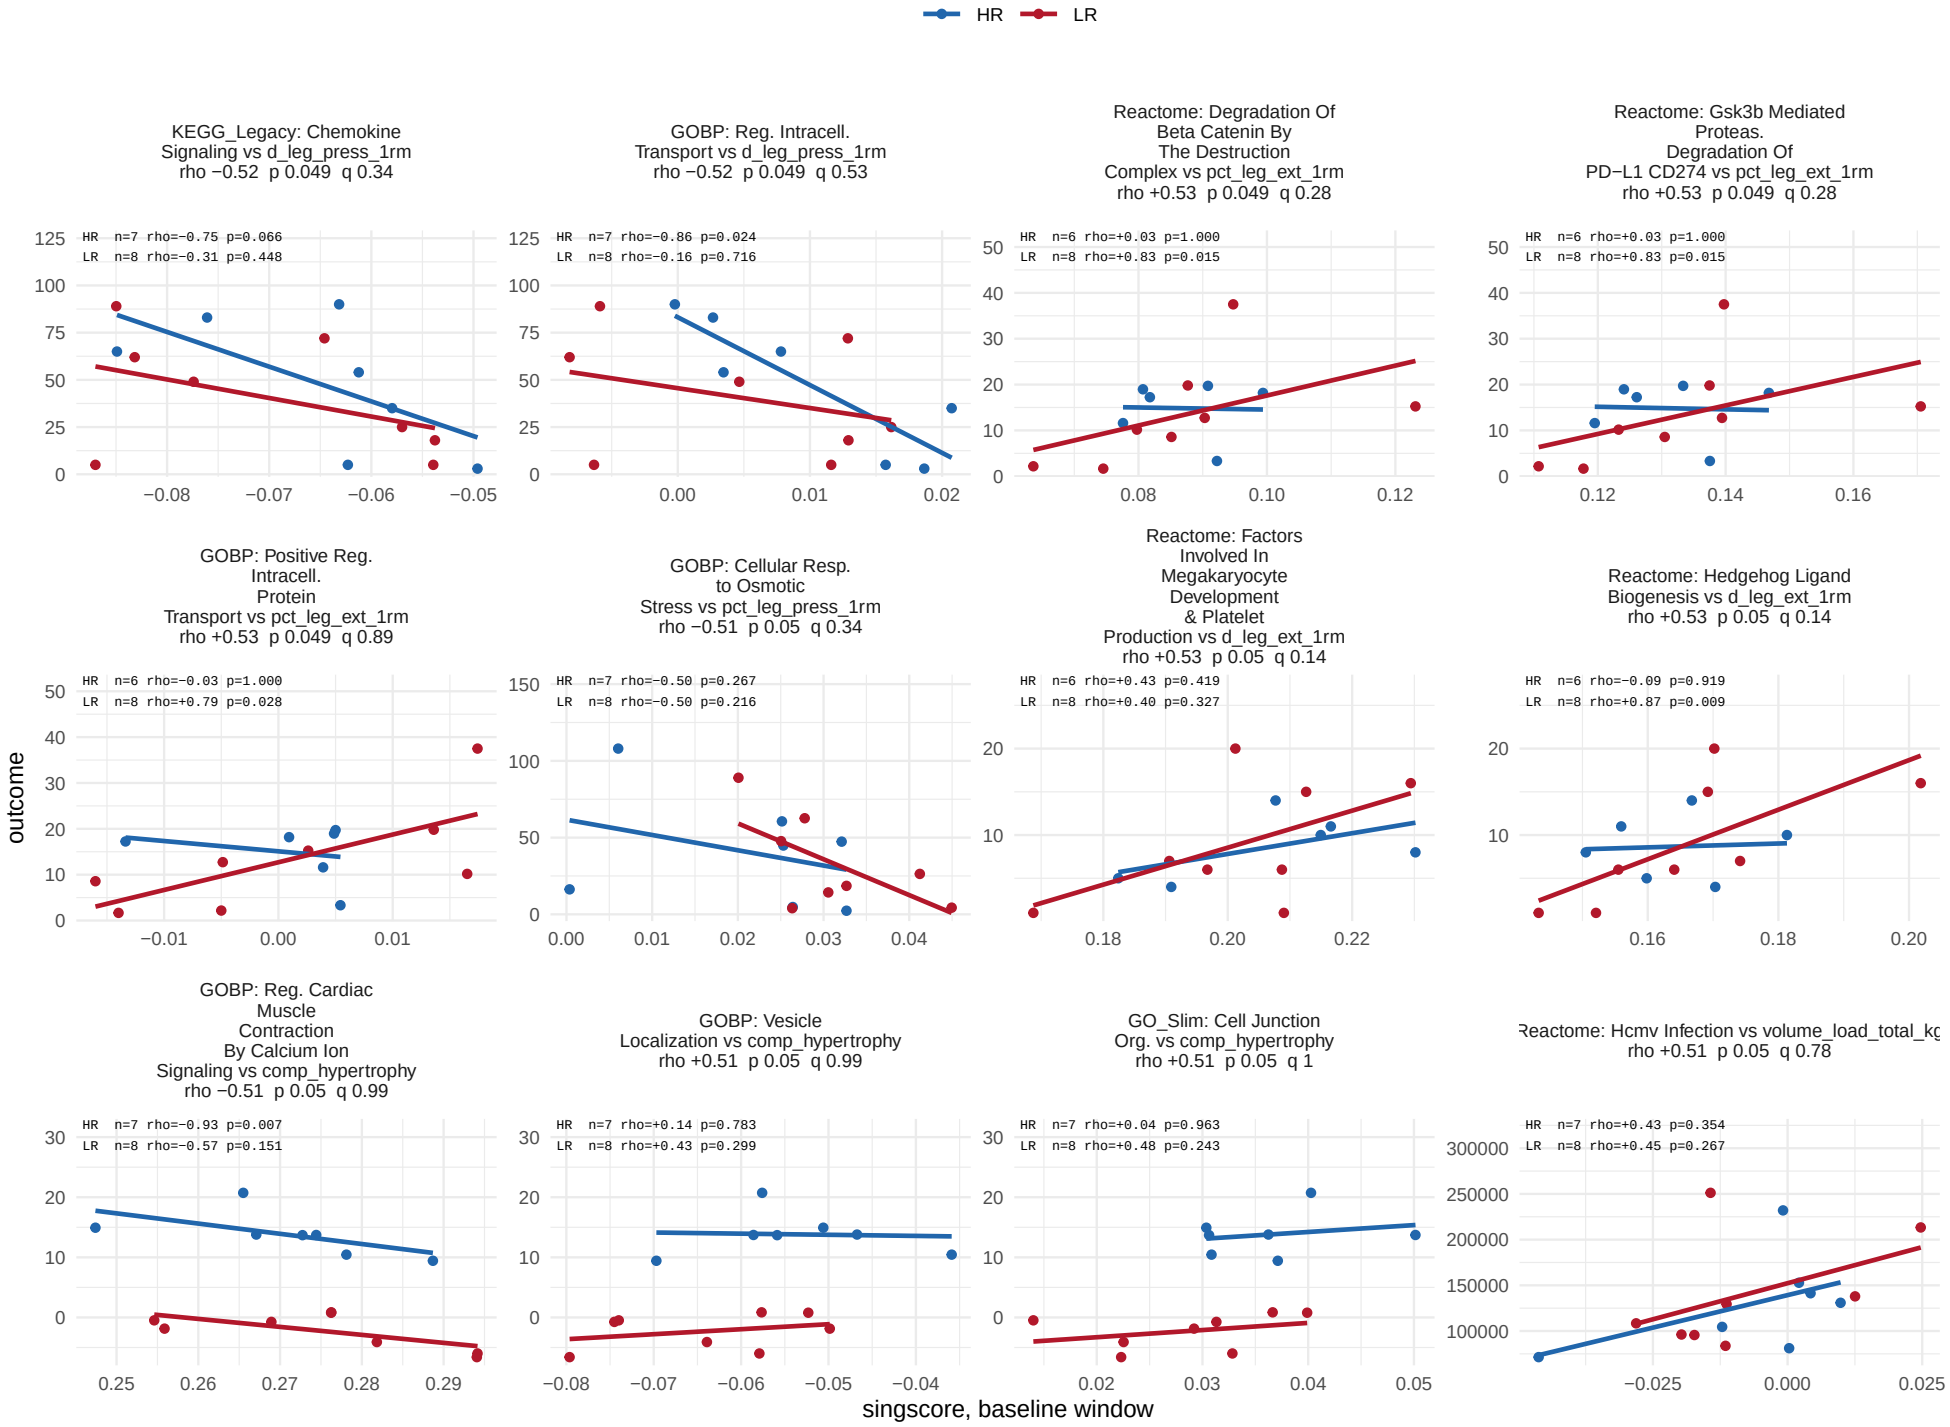

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

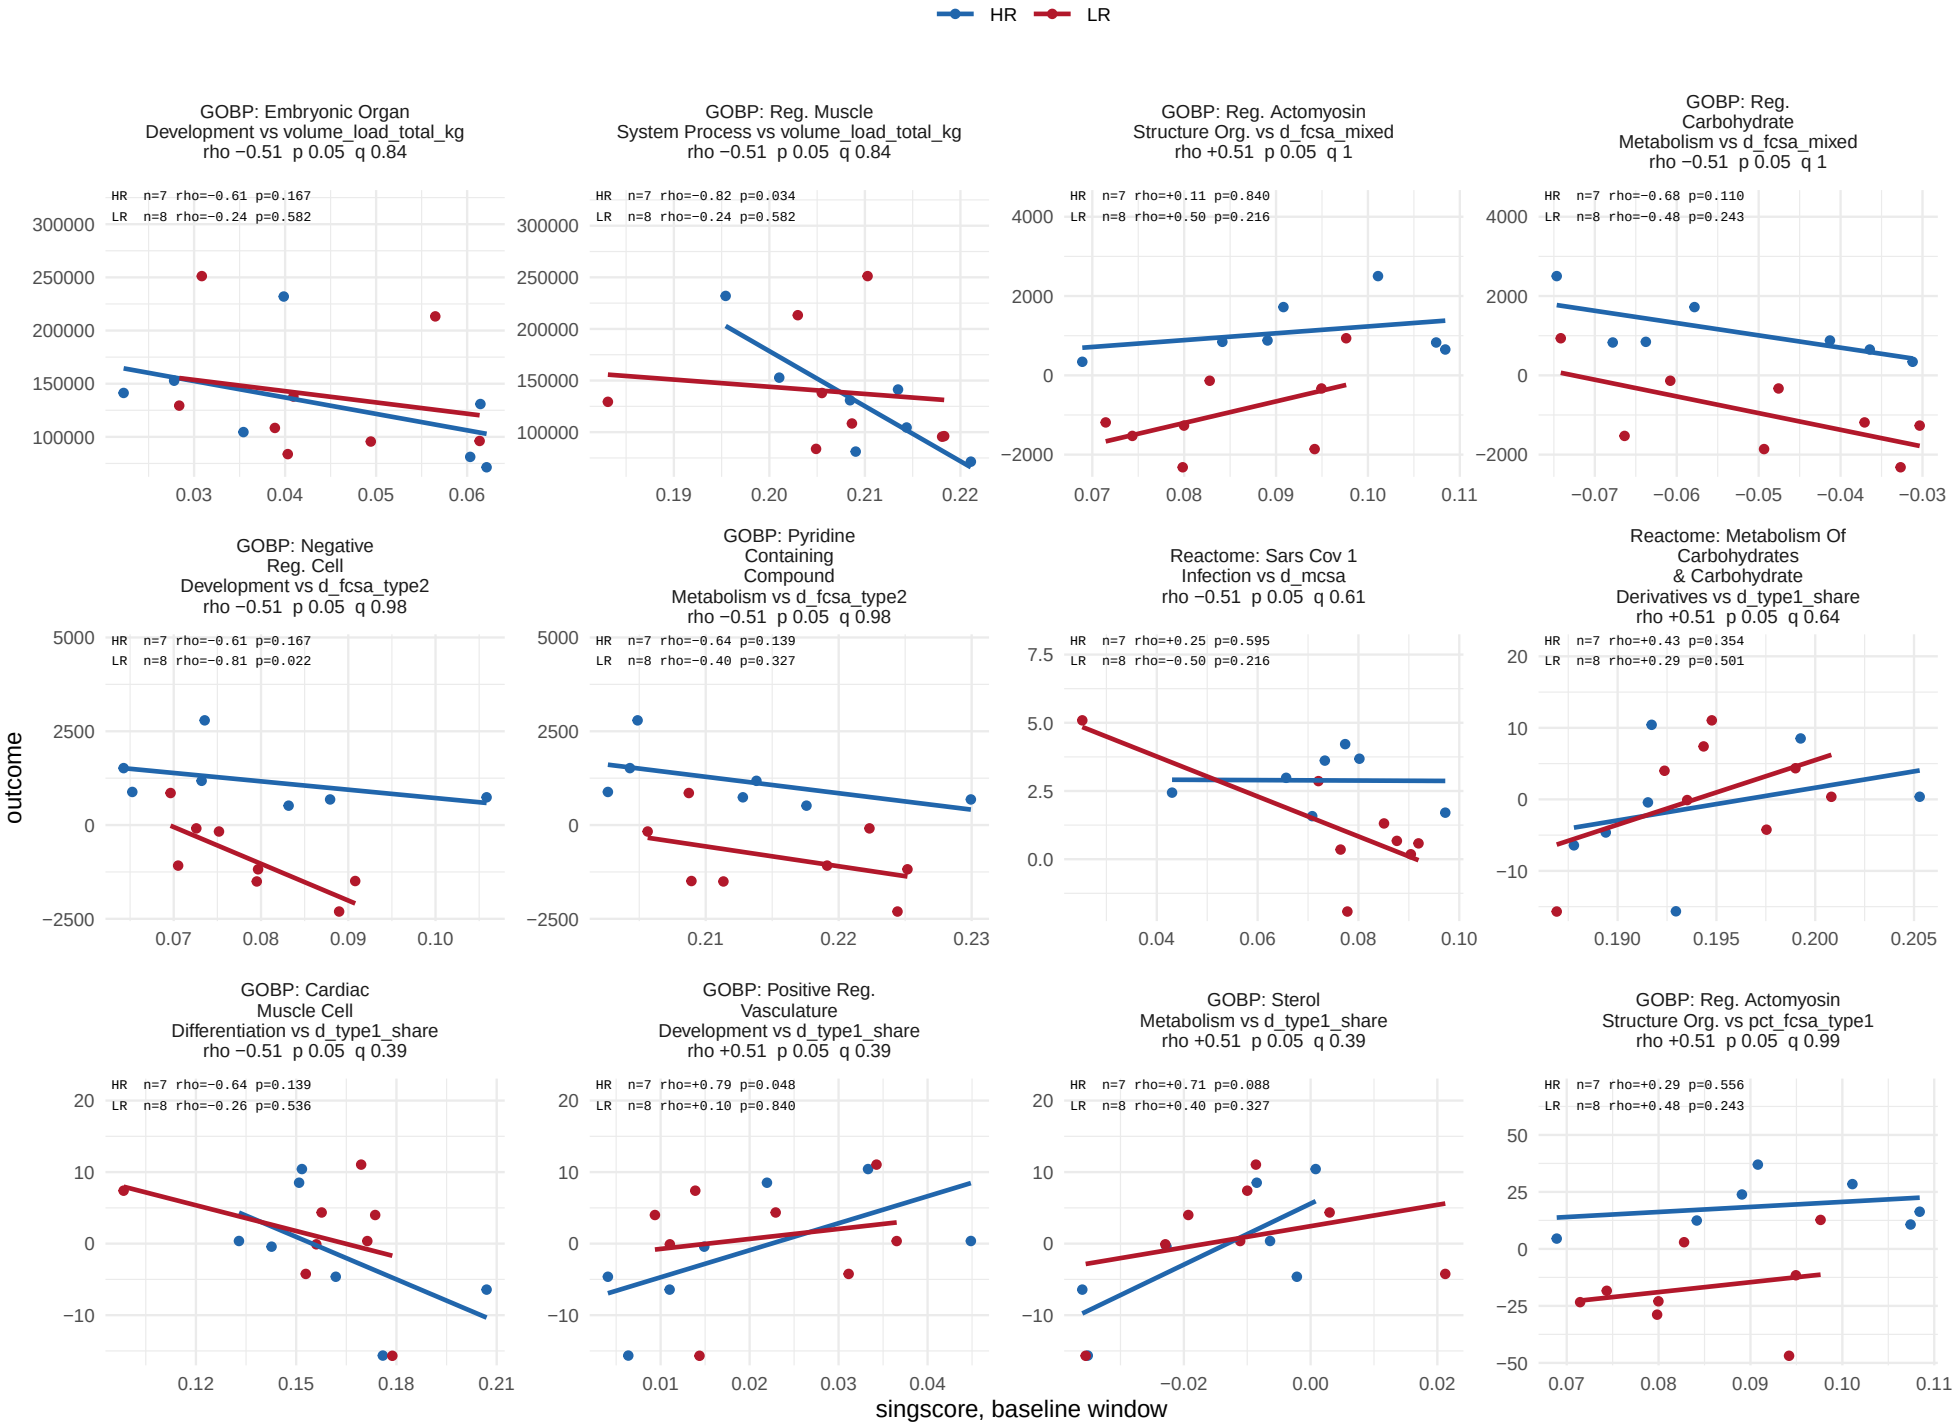

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, baseline window


1366 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

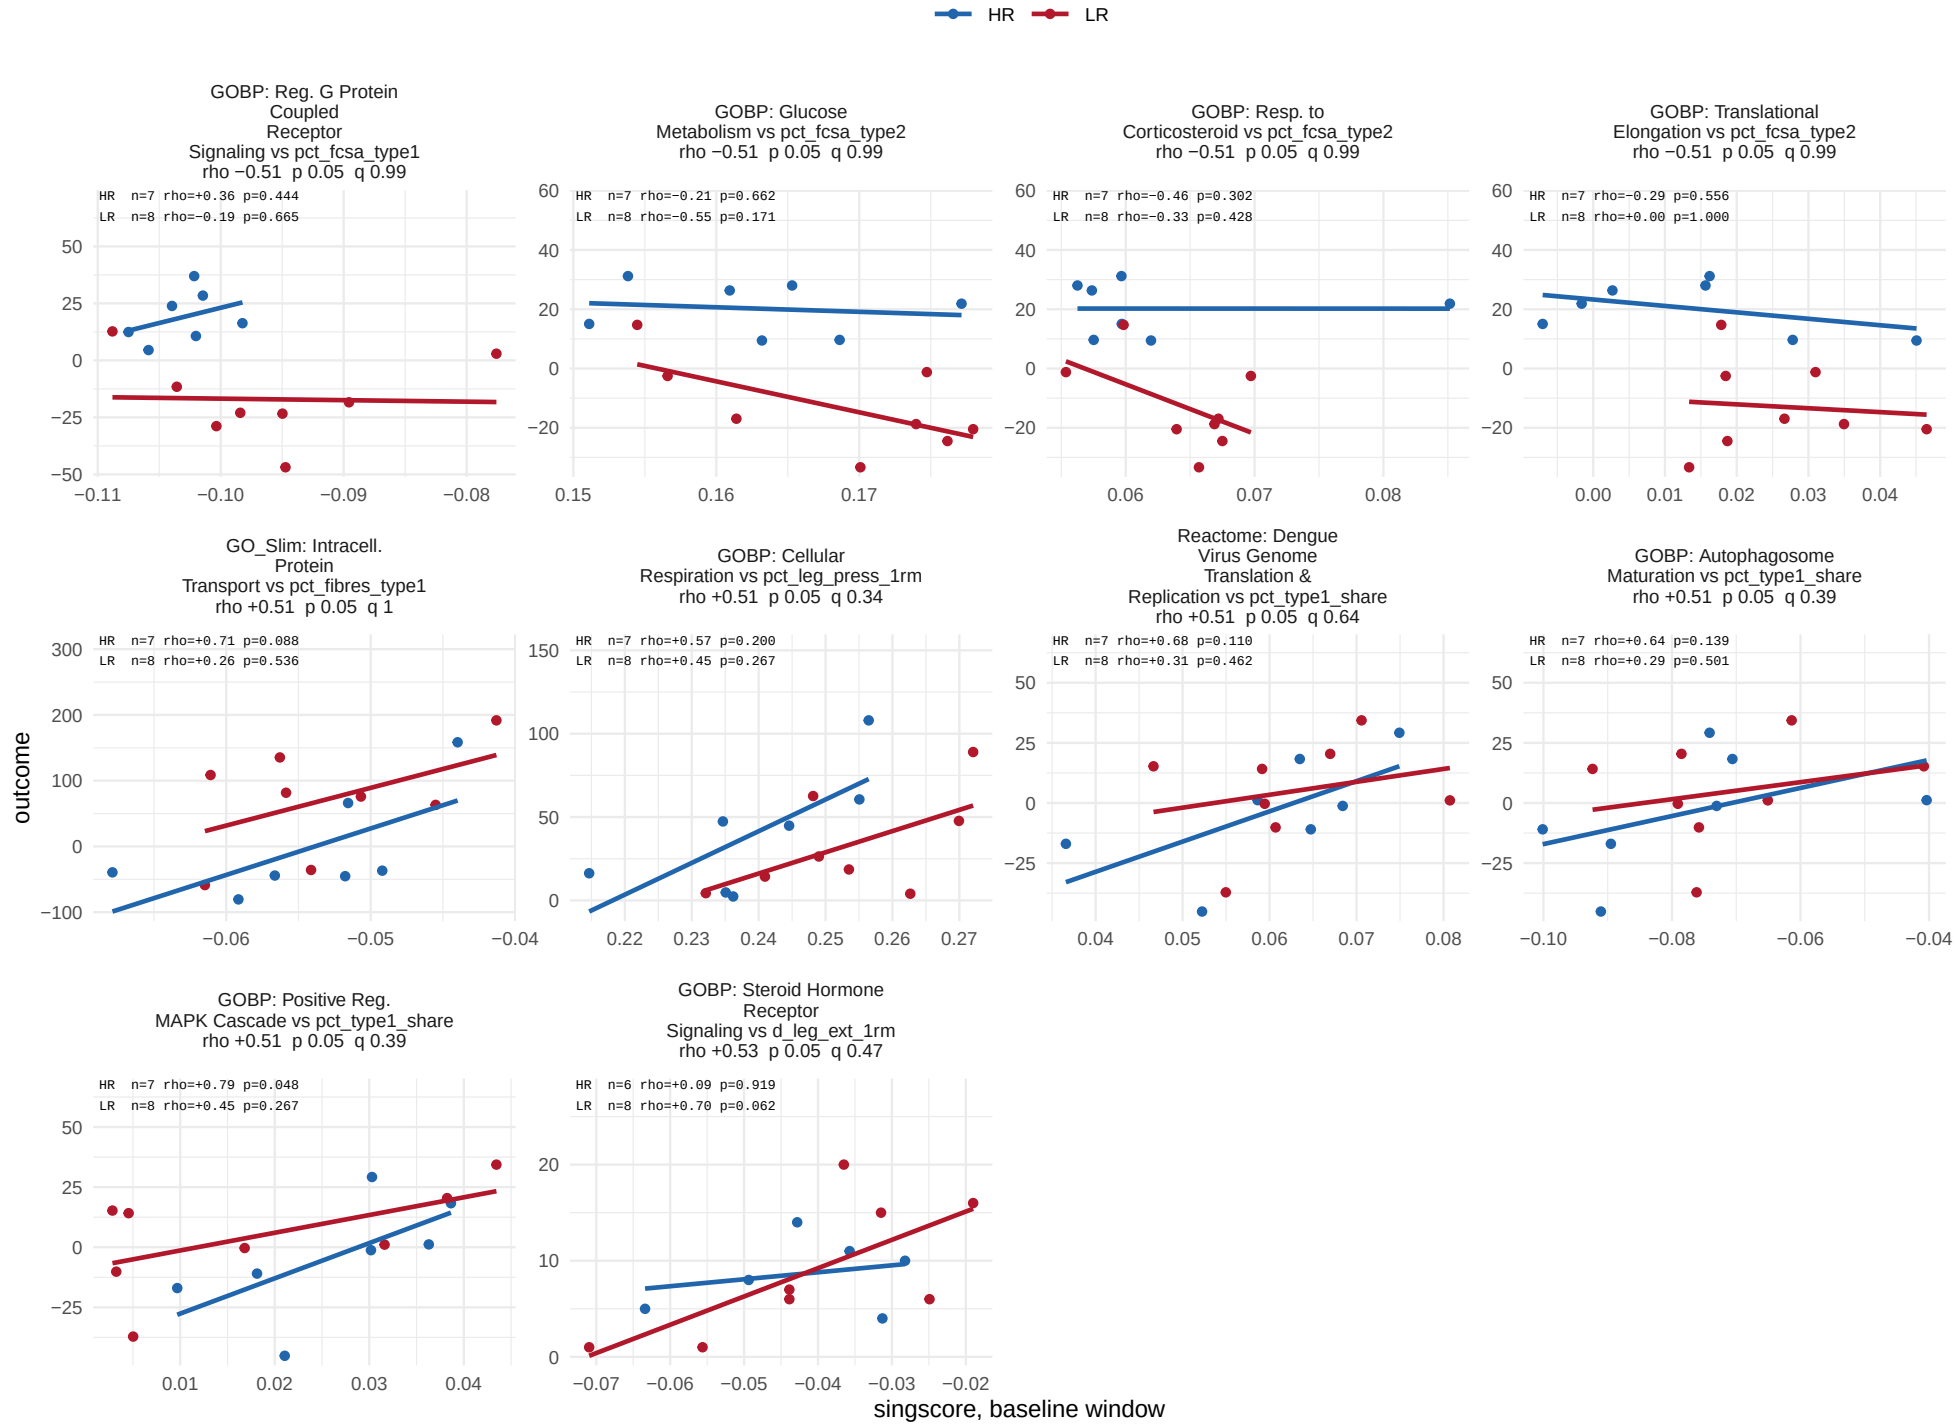

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


923 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

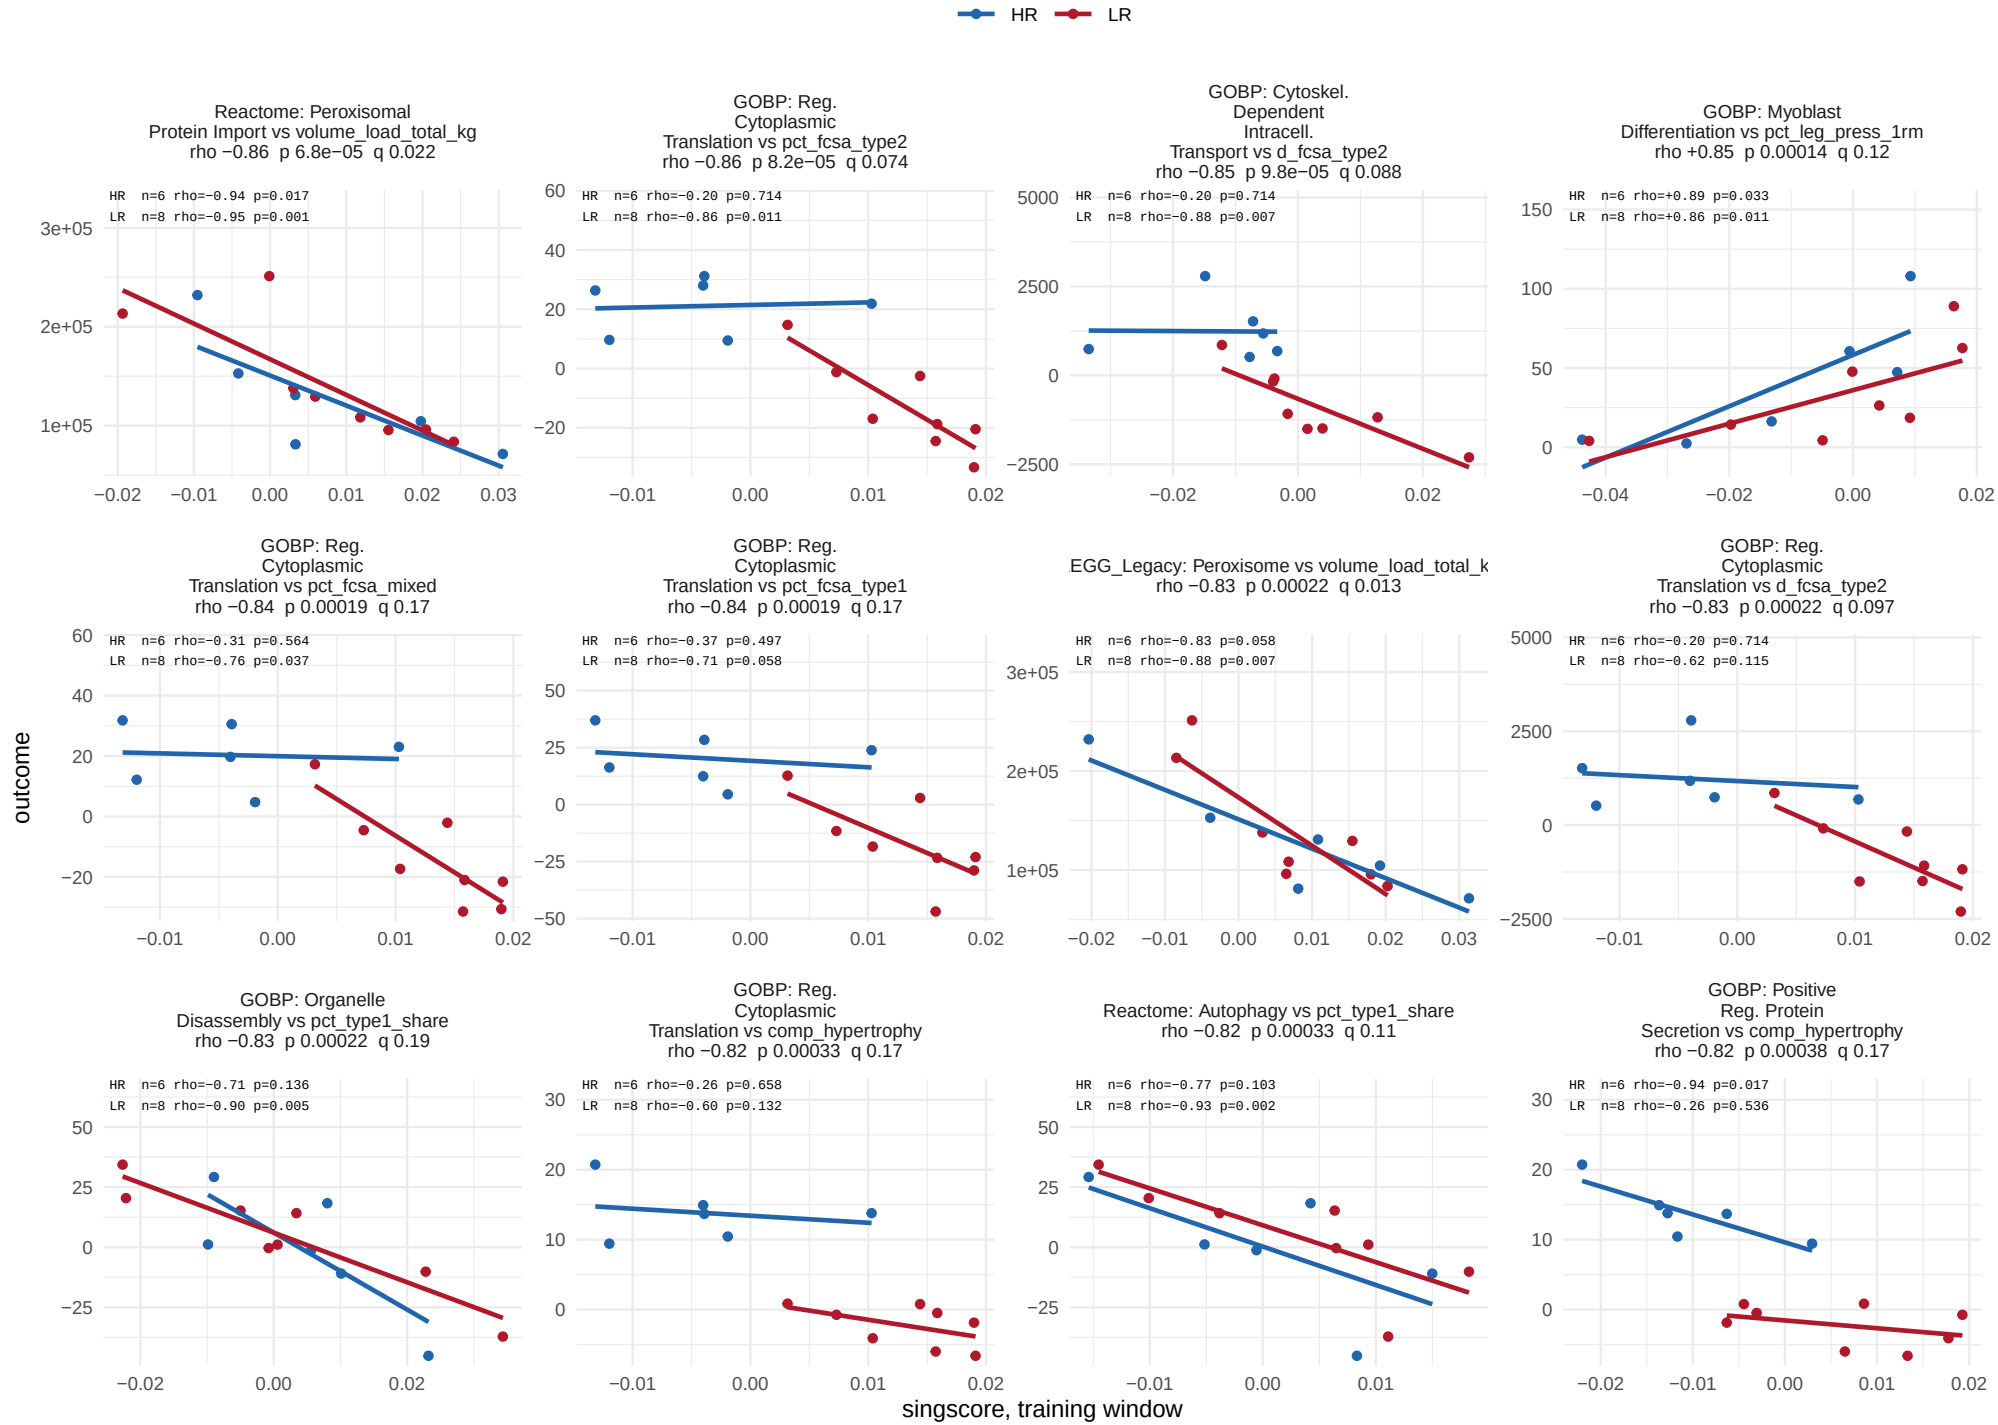

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


923 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

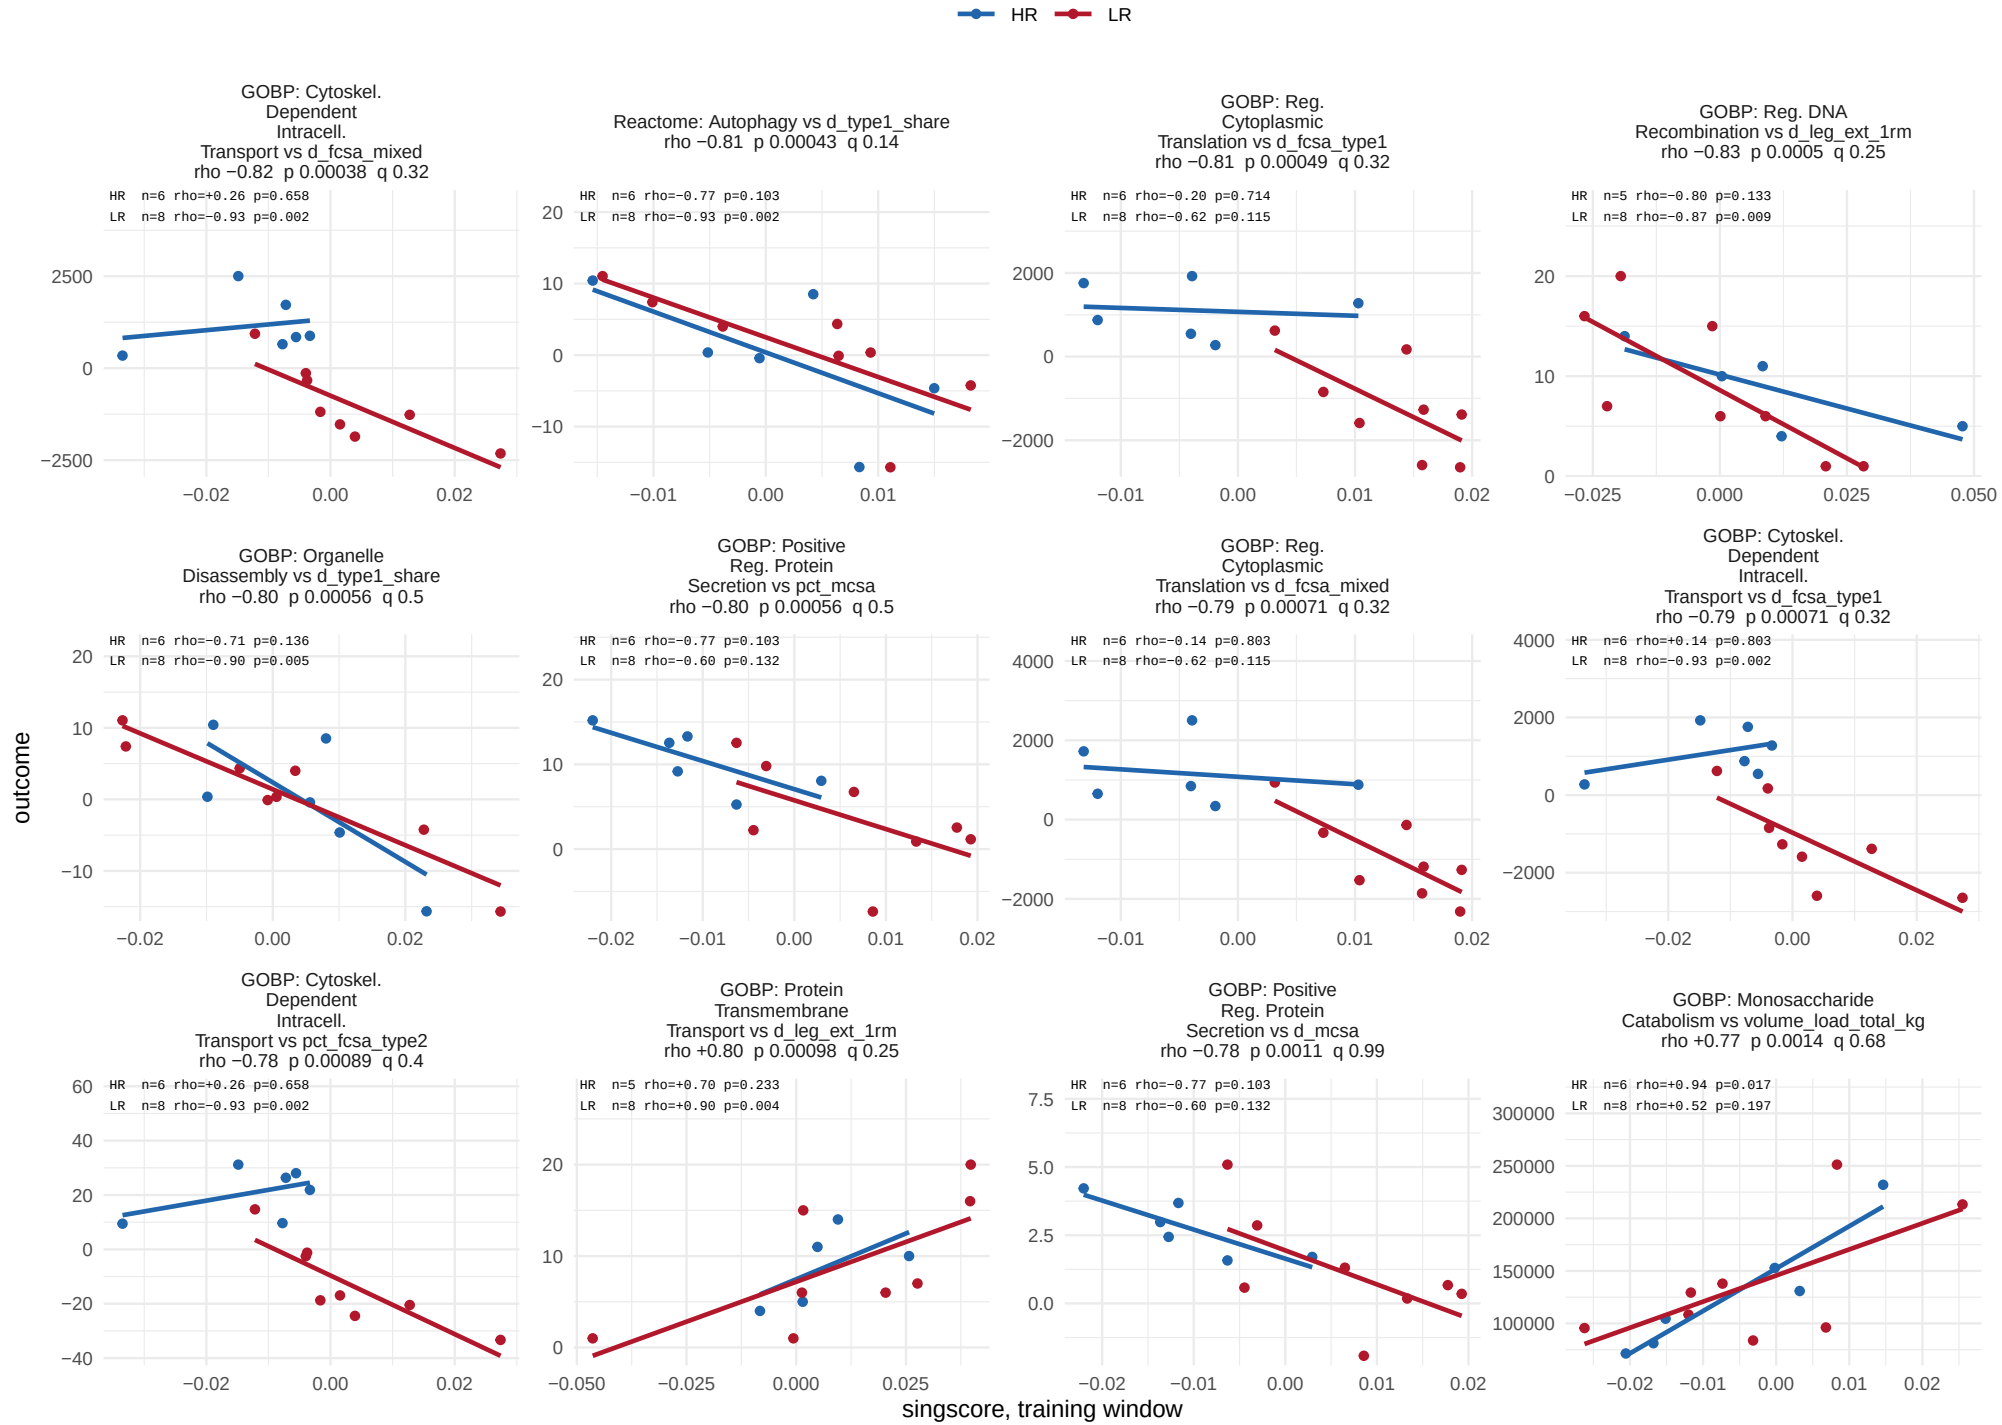

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


923 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

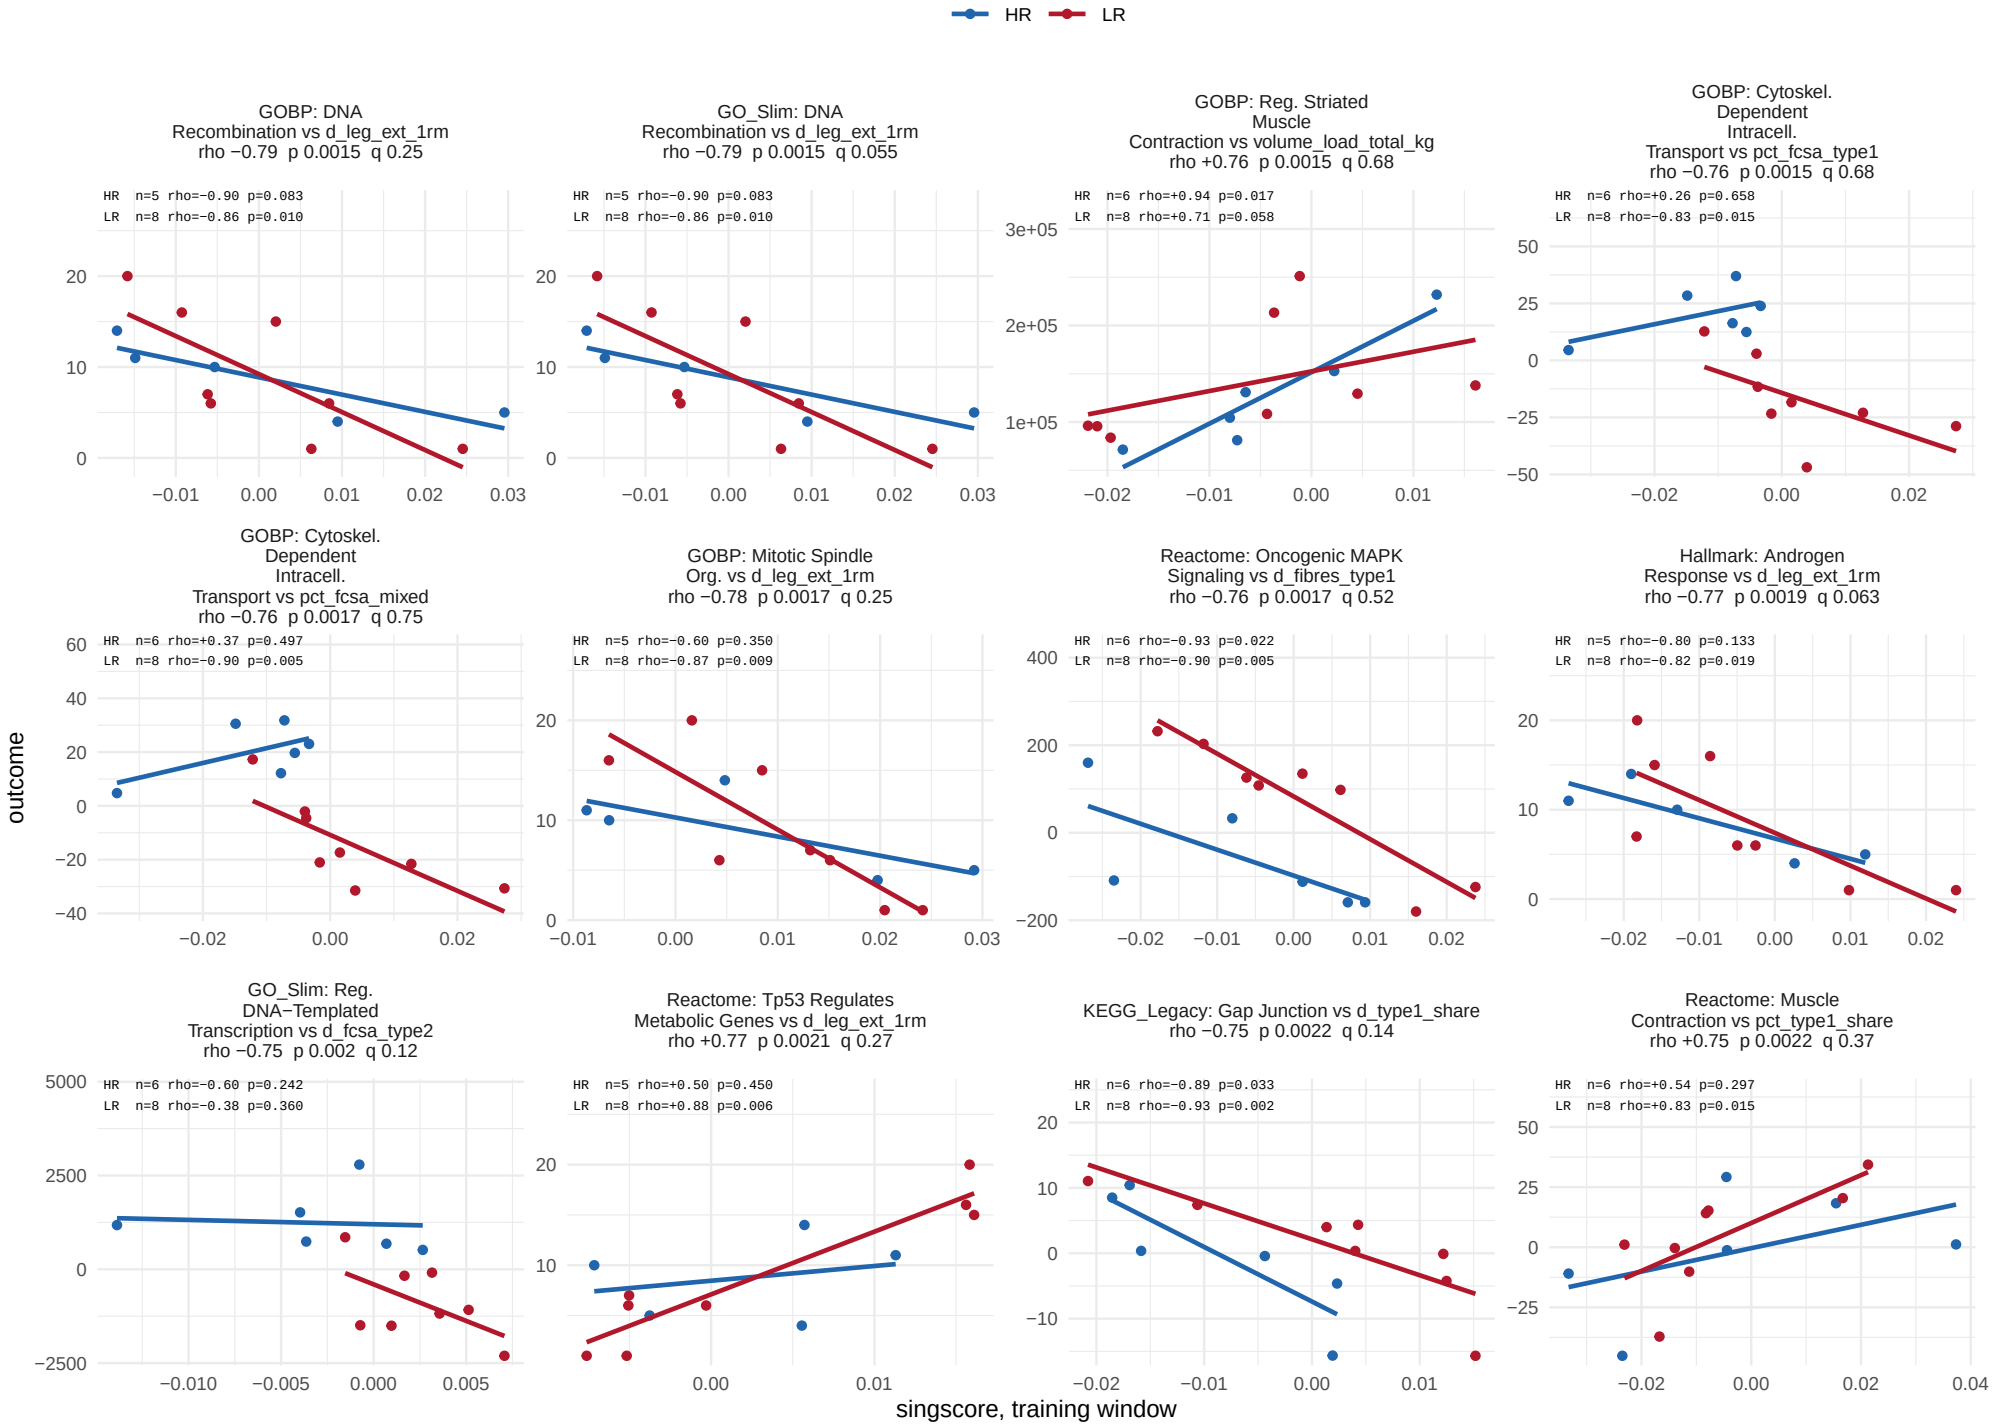

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


923 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

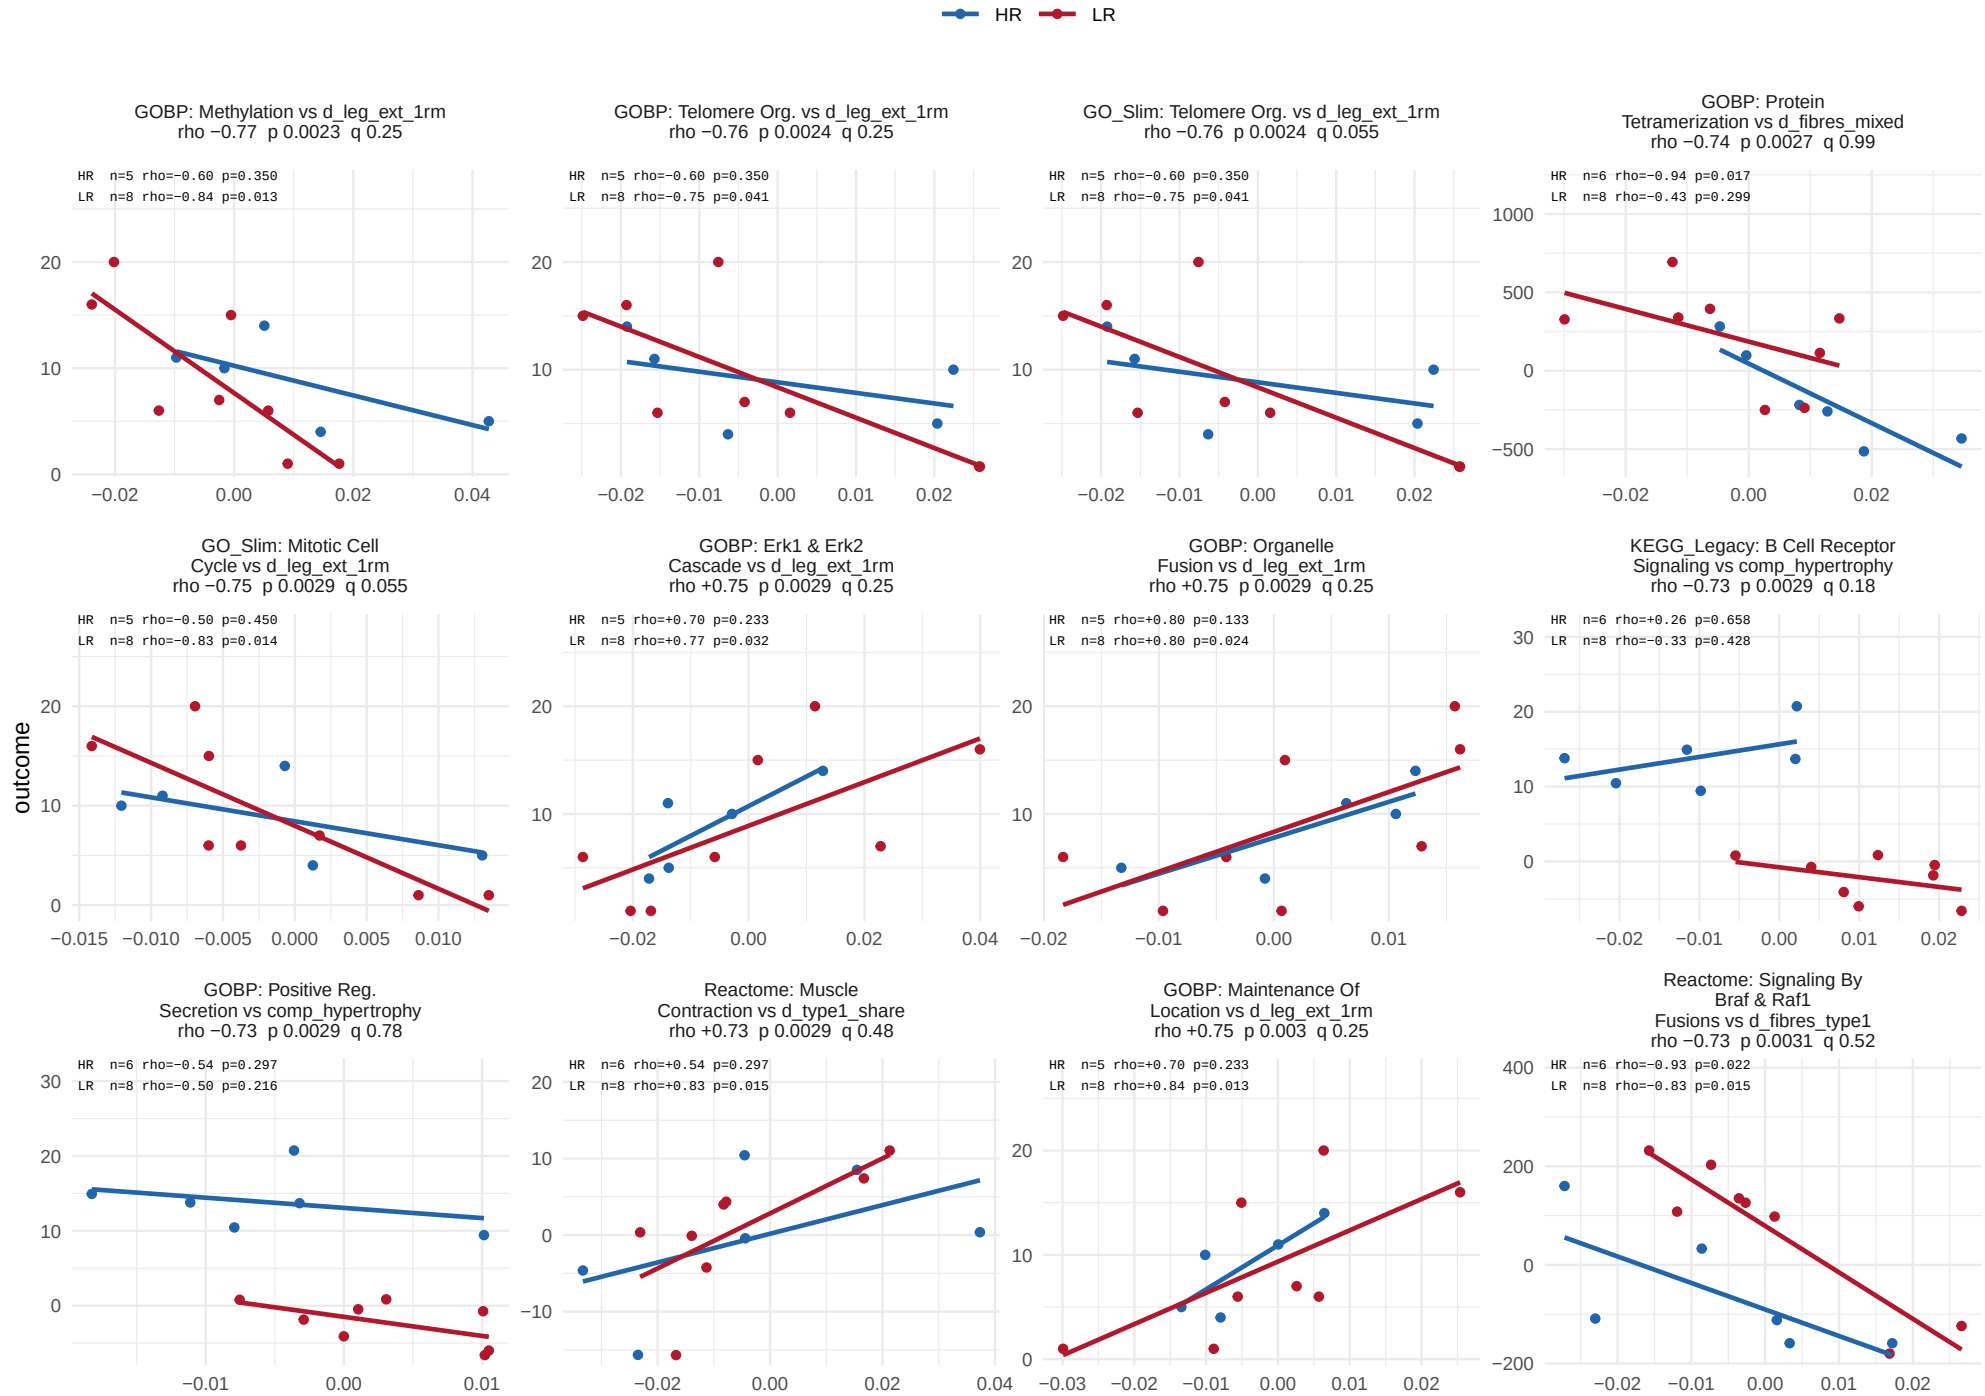

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


923 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

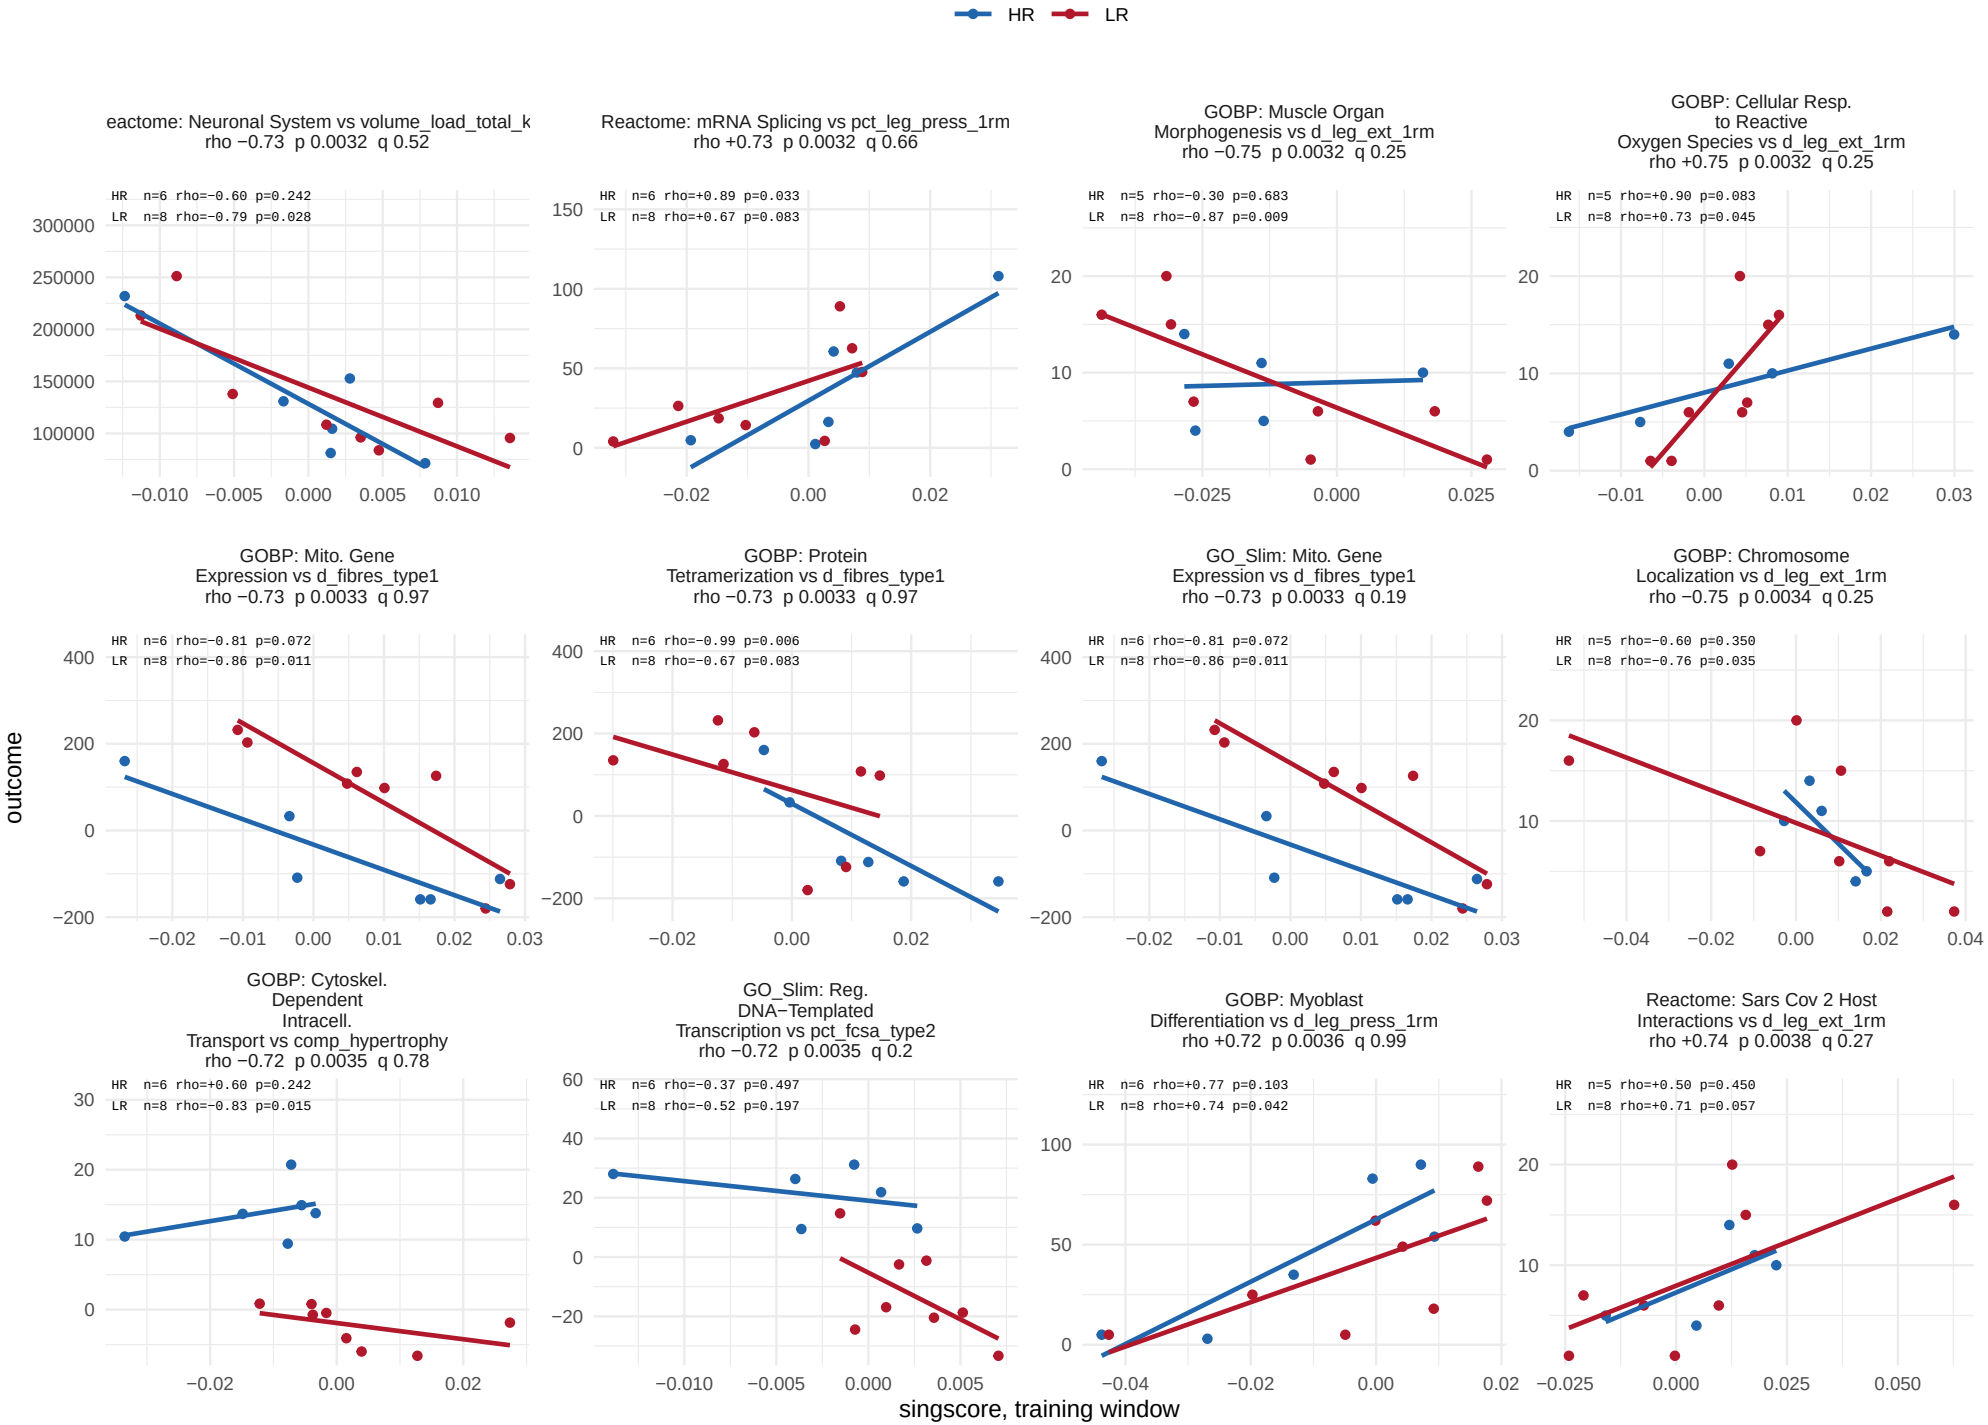

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


923 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

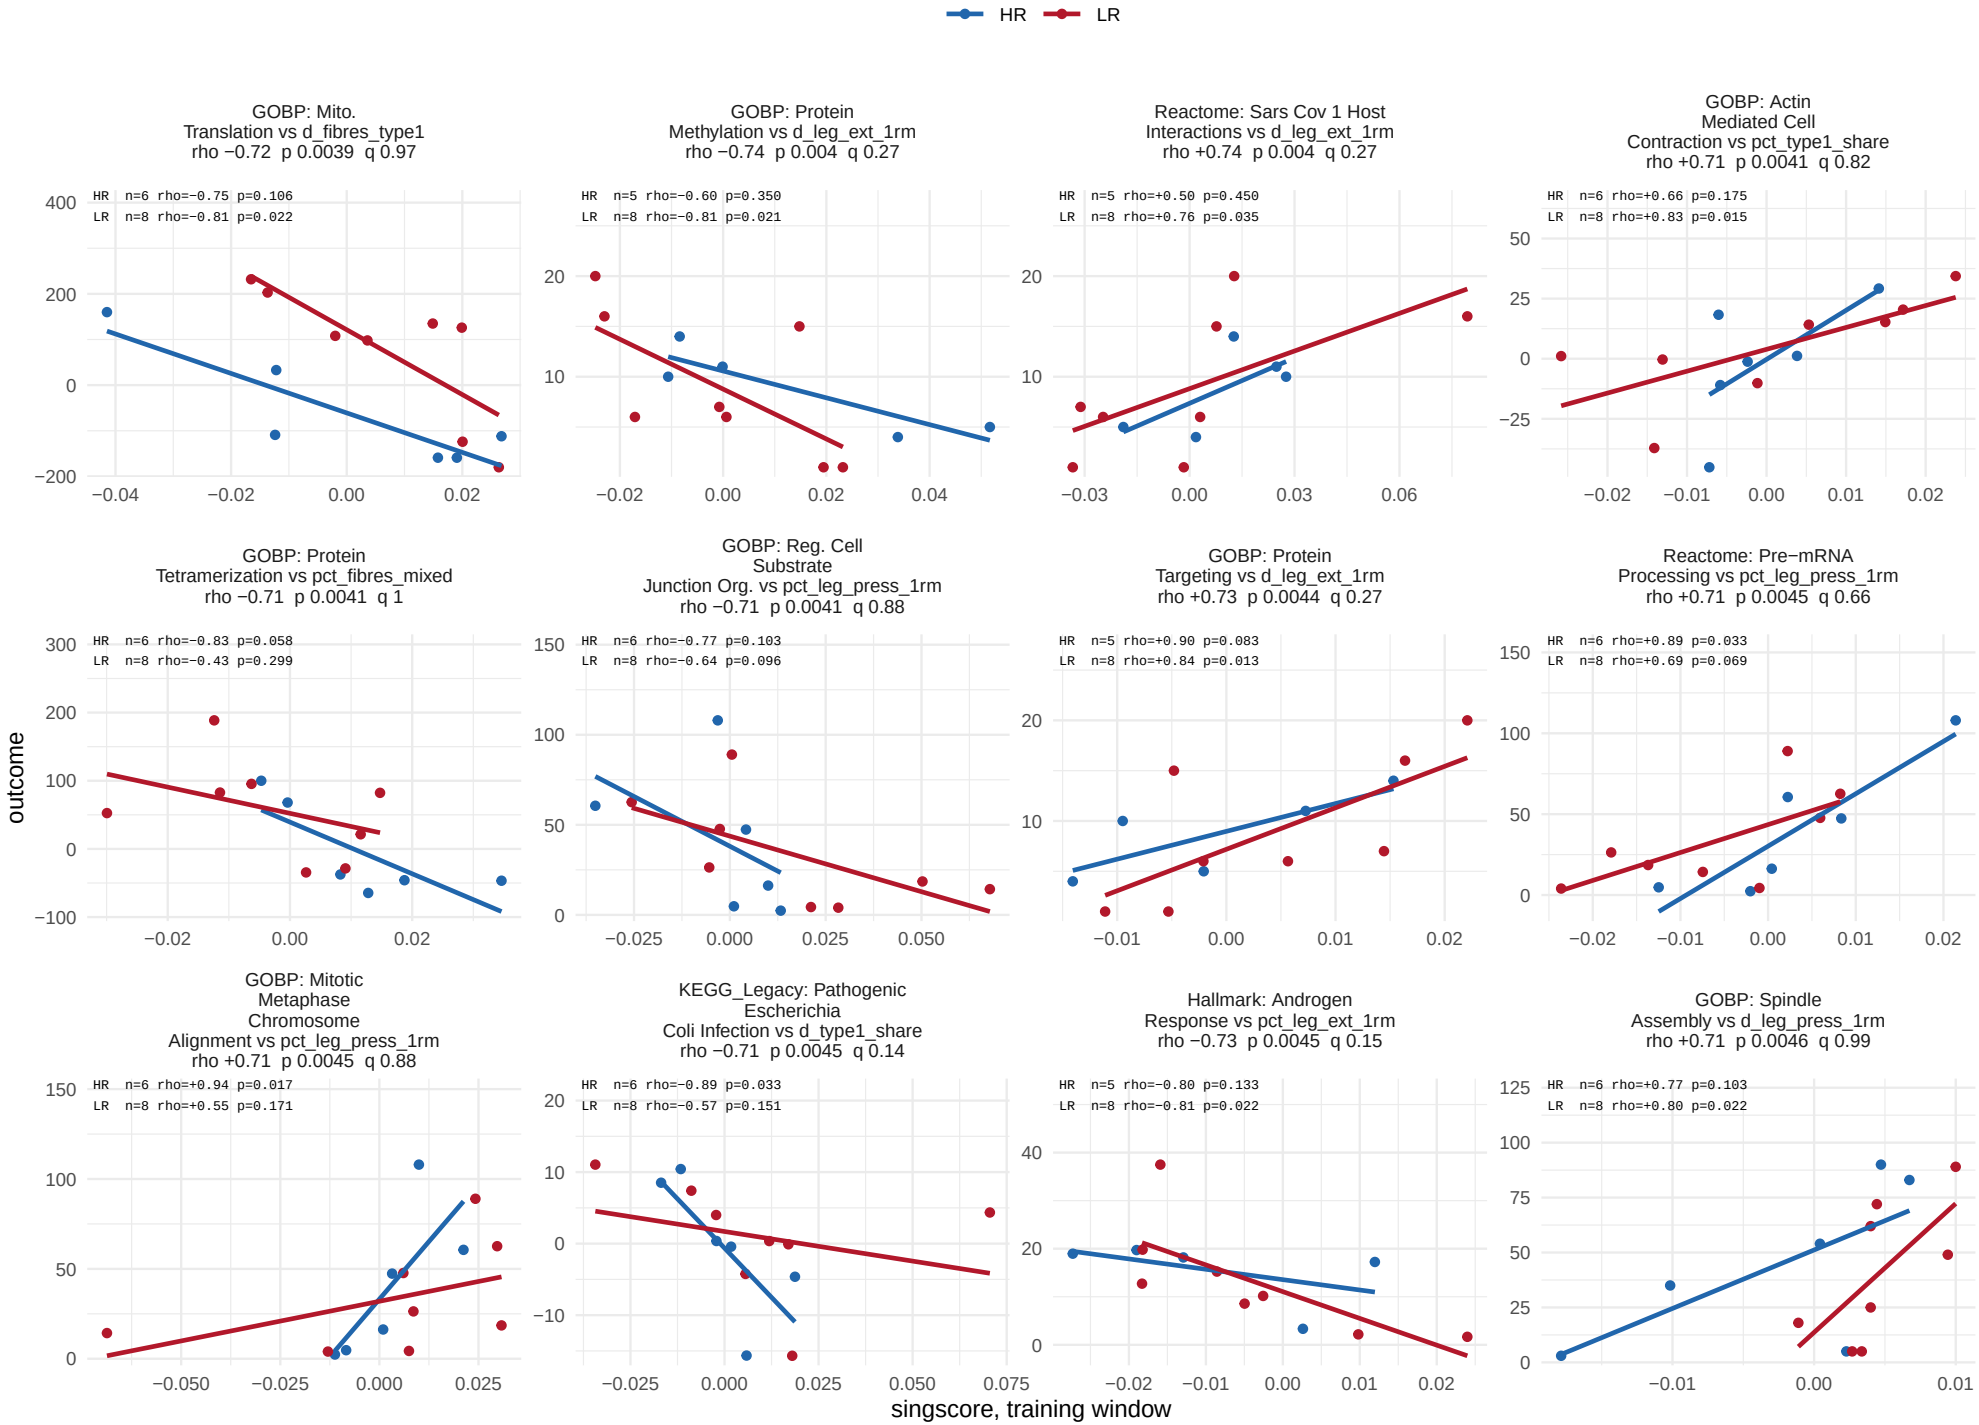

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


923 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

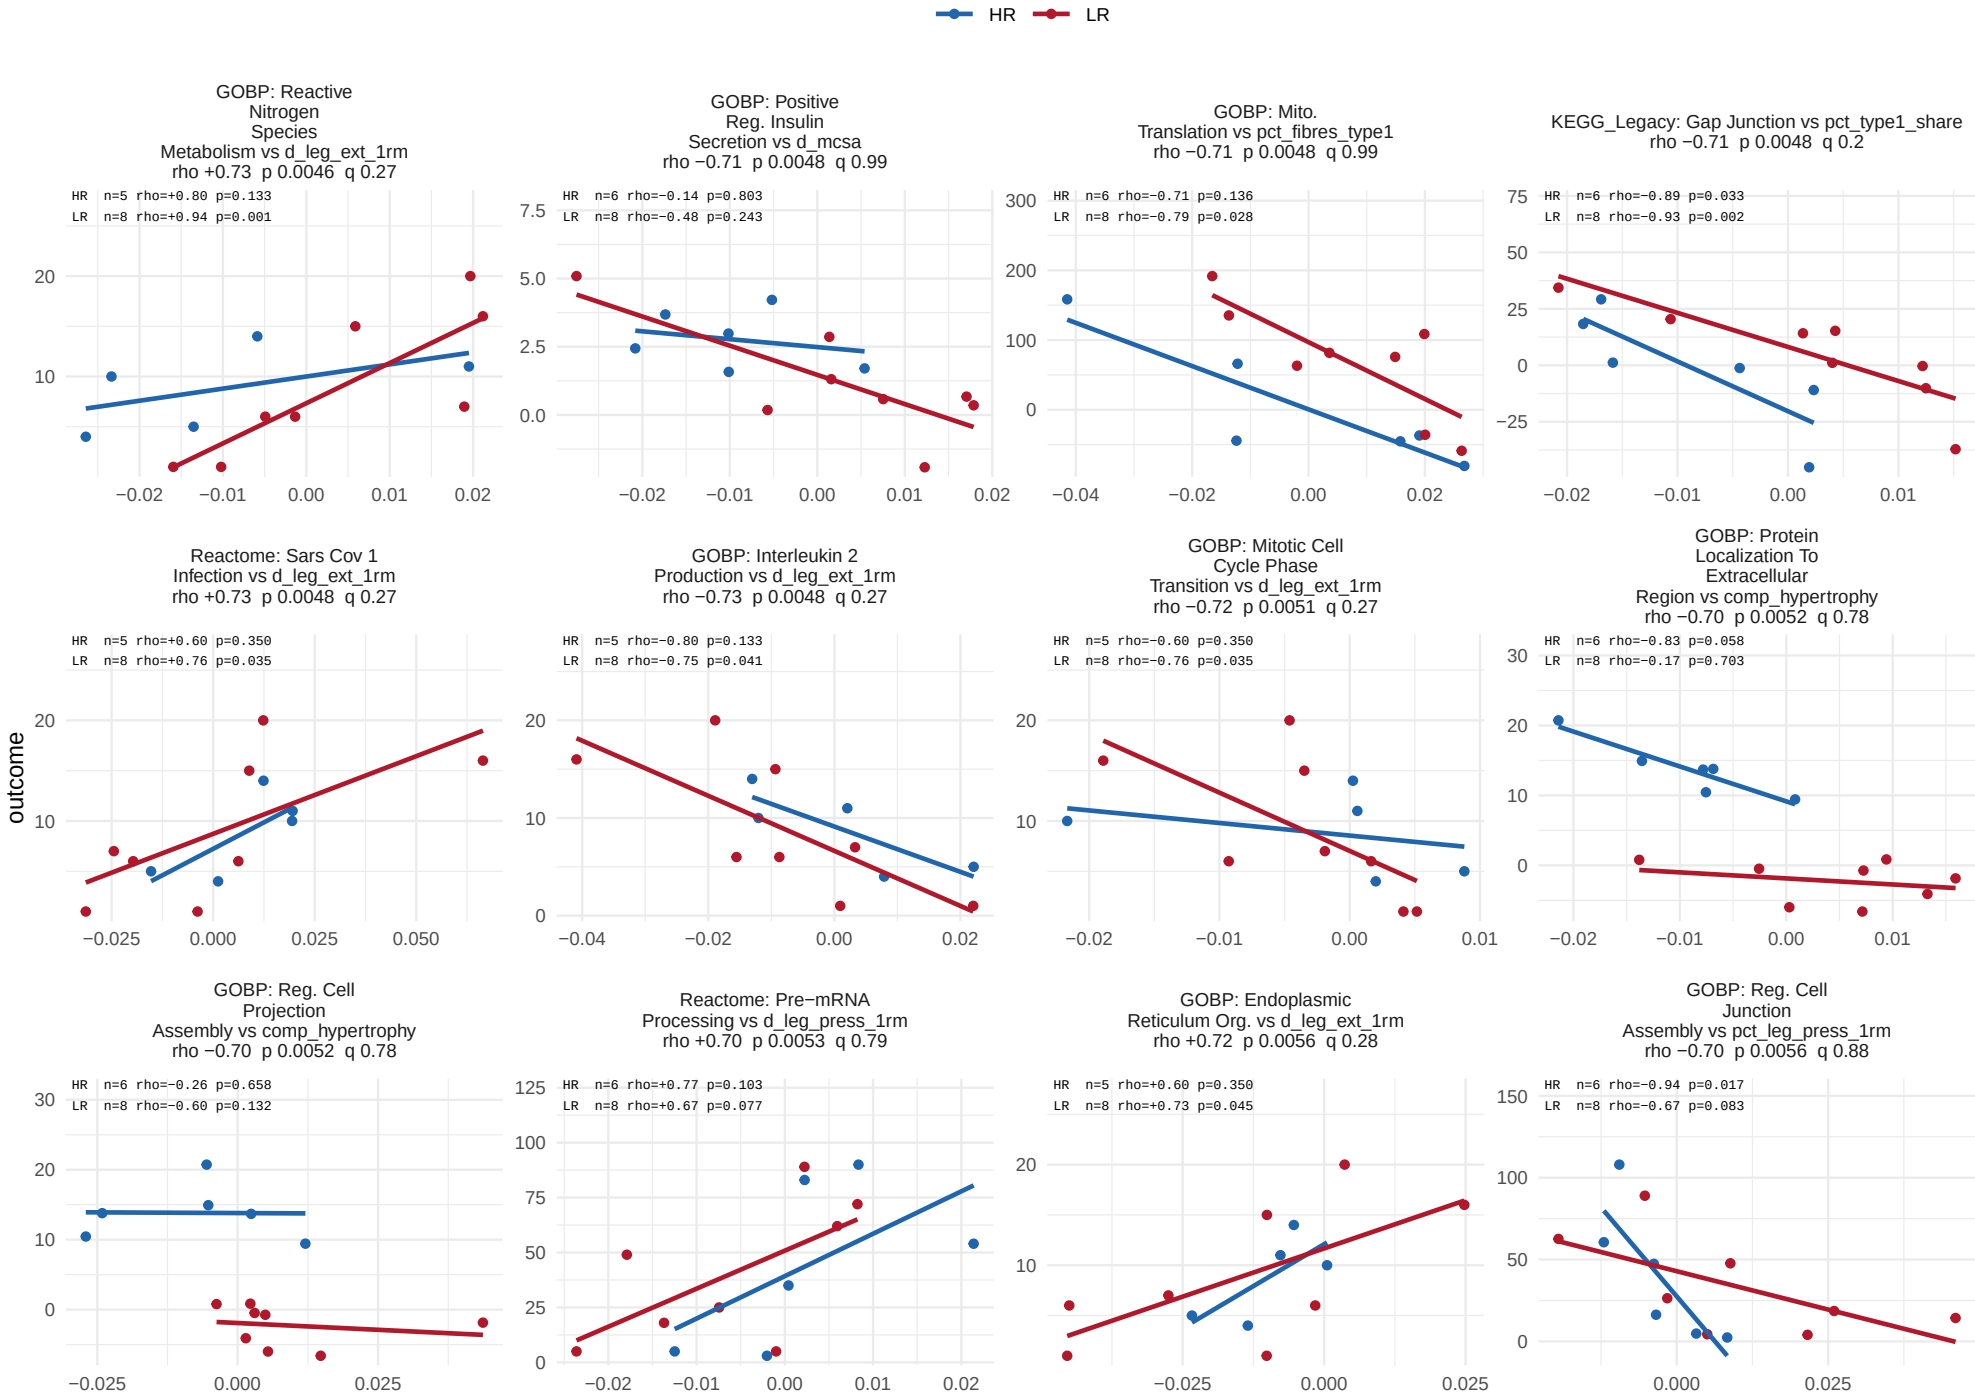

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


923 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

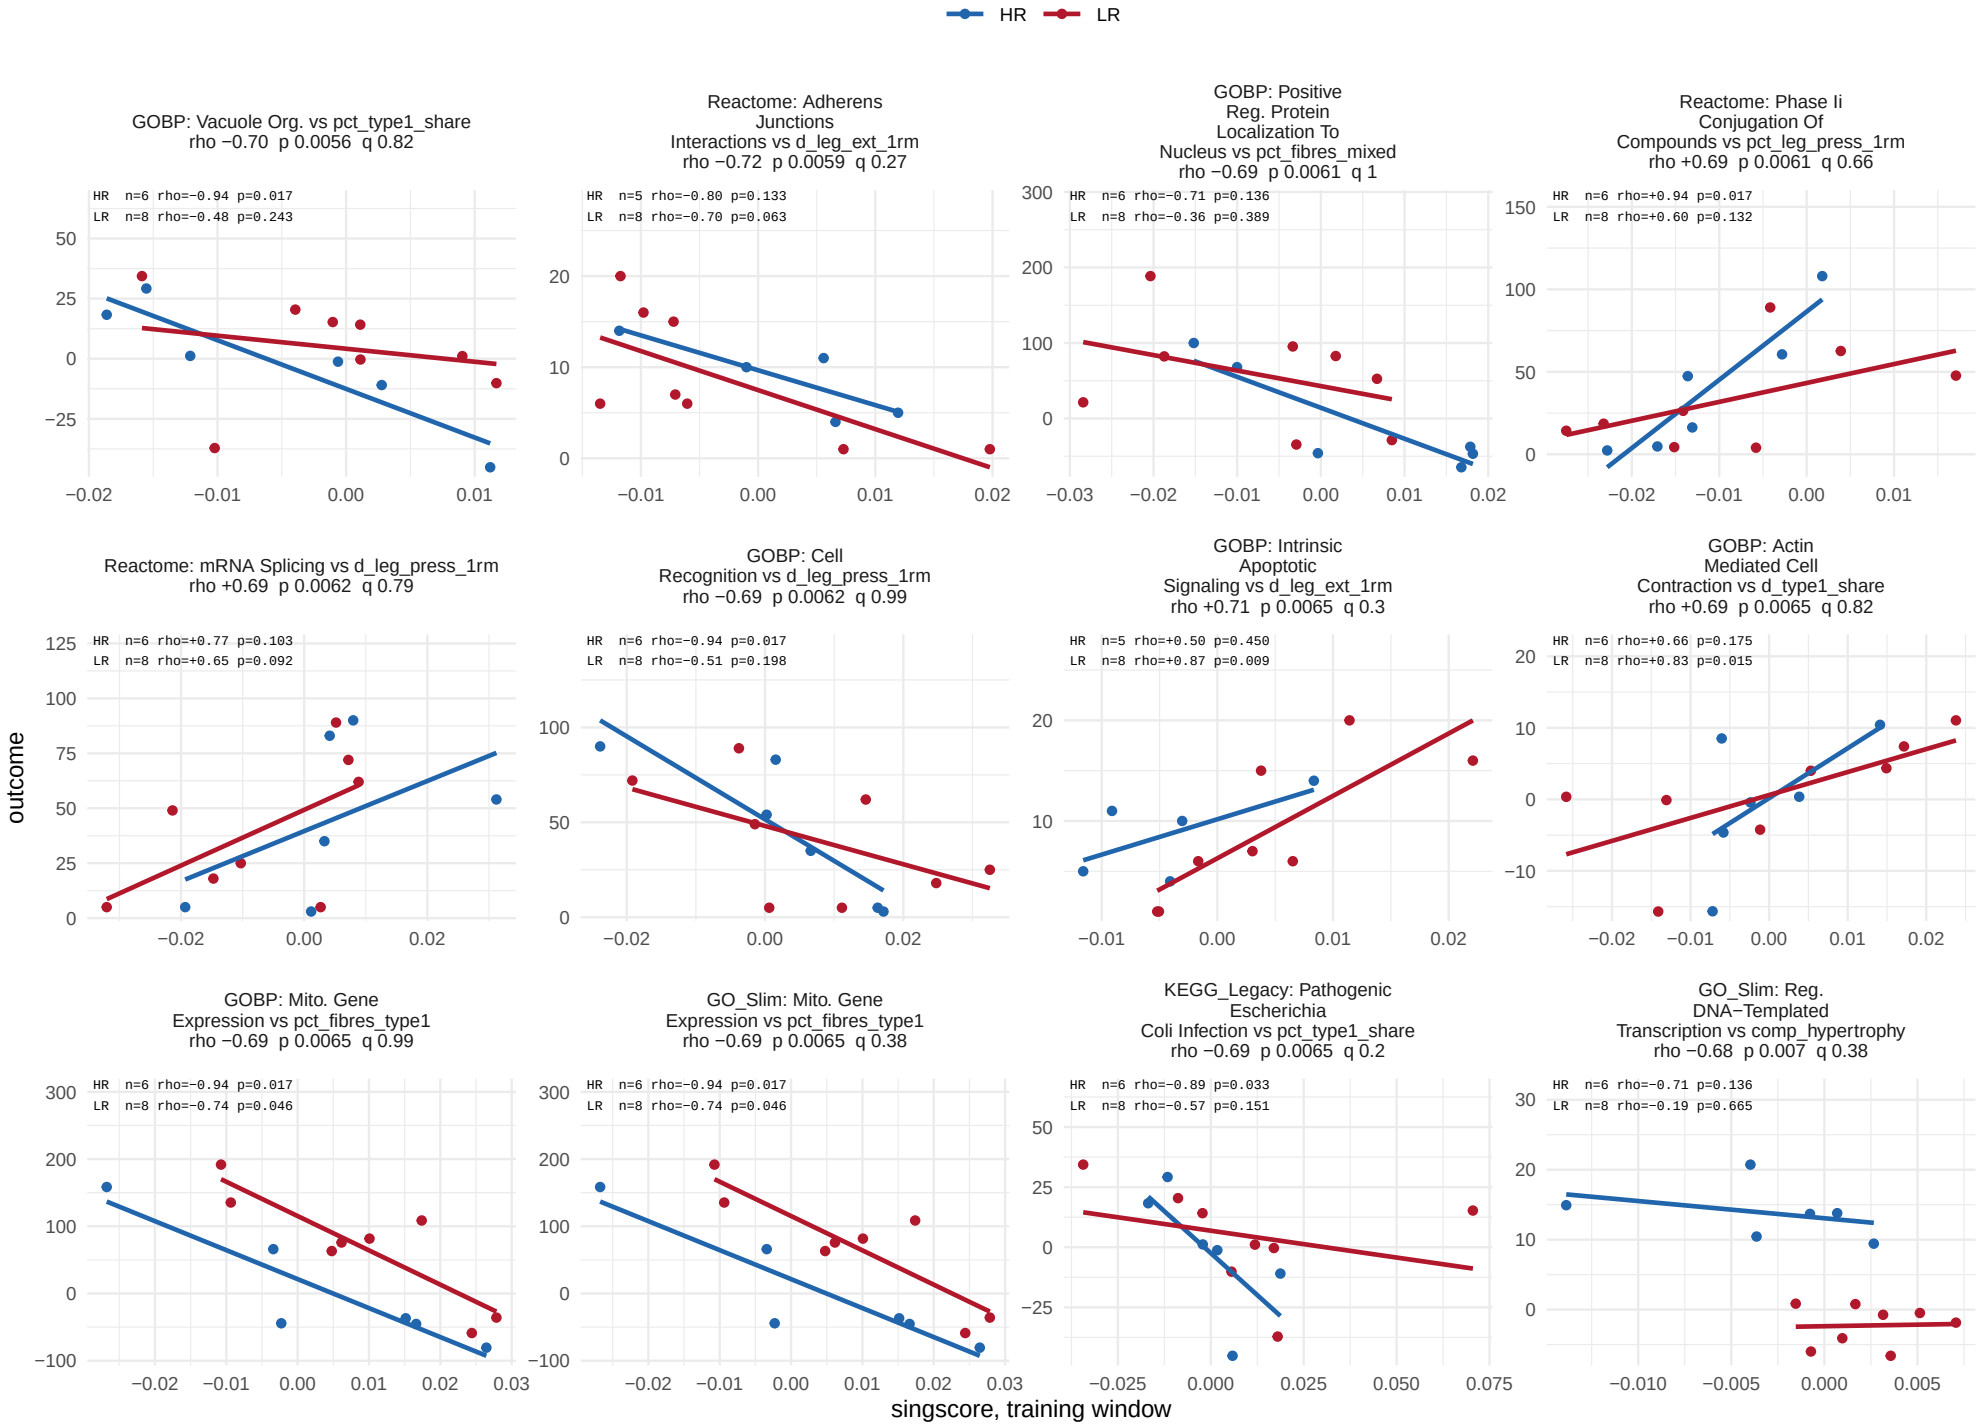

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


923 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

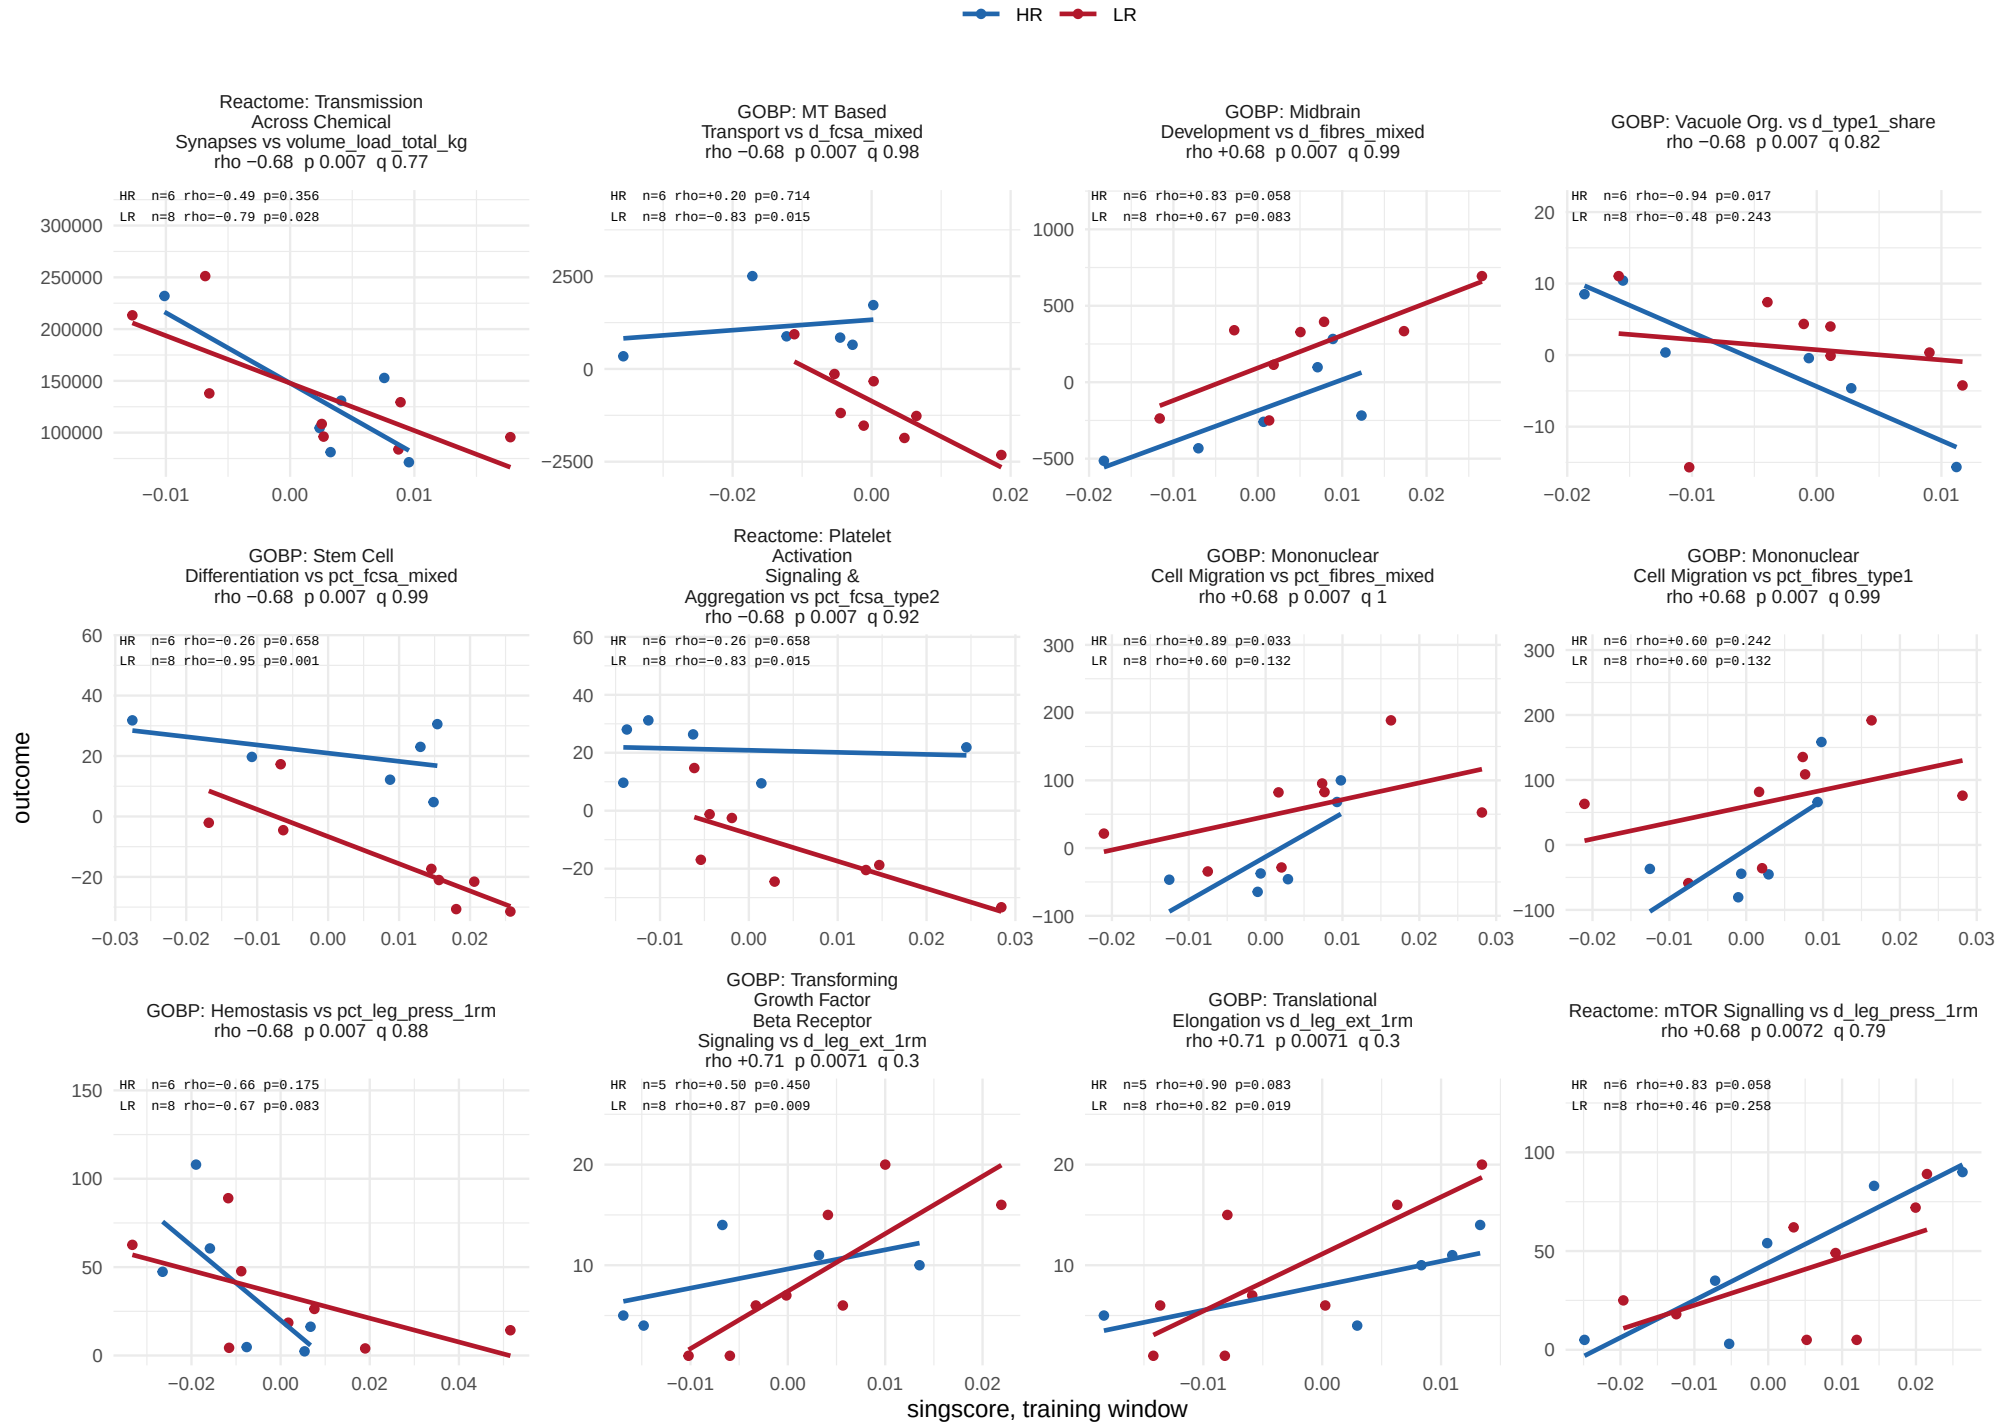

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


923 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

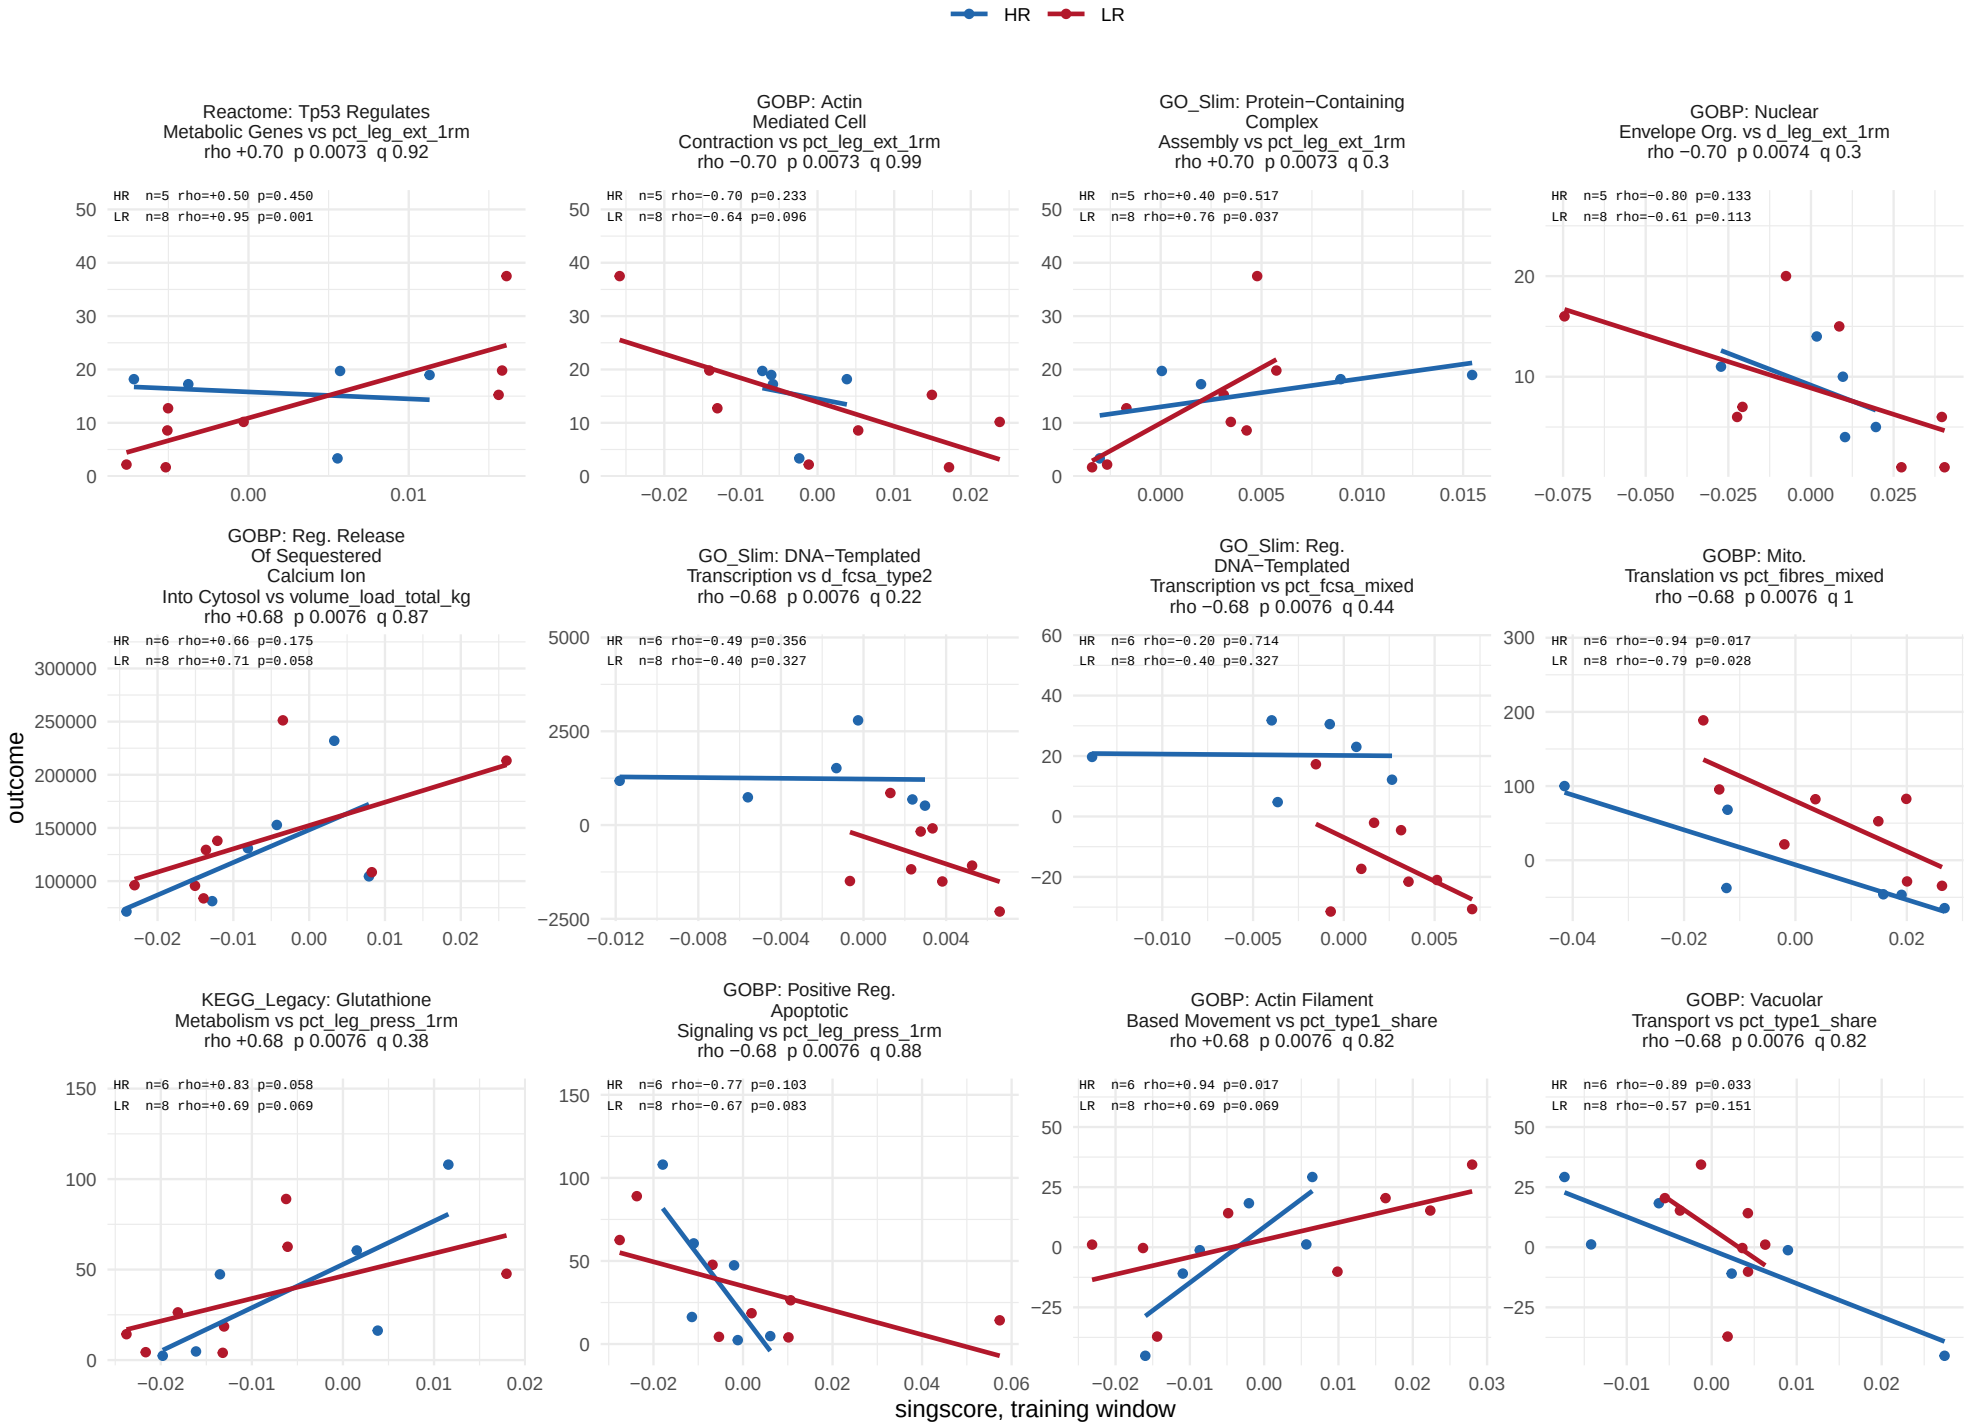

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


923 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

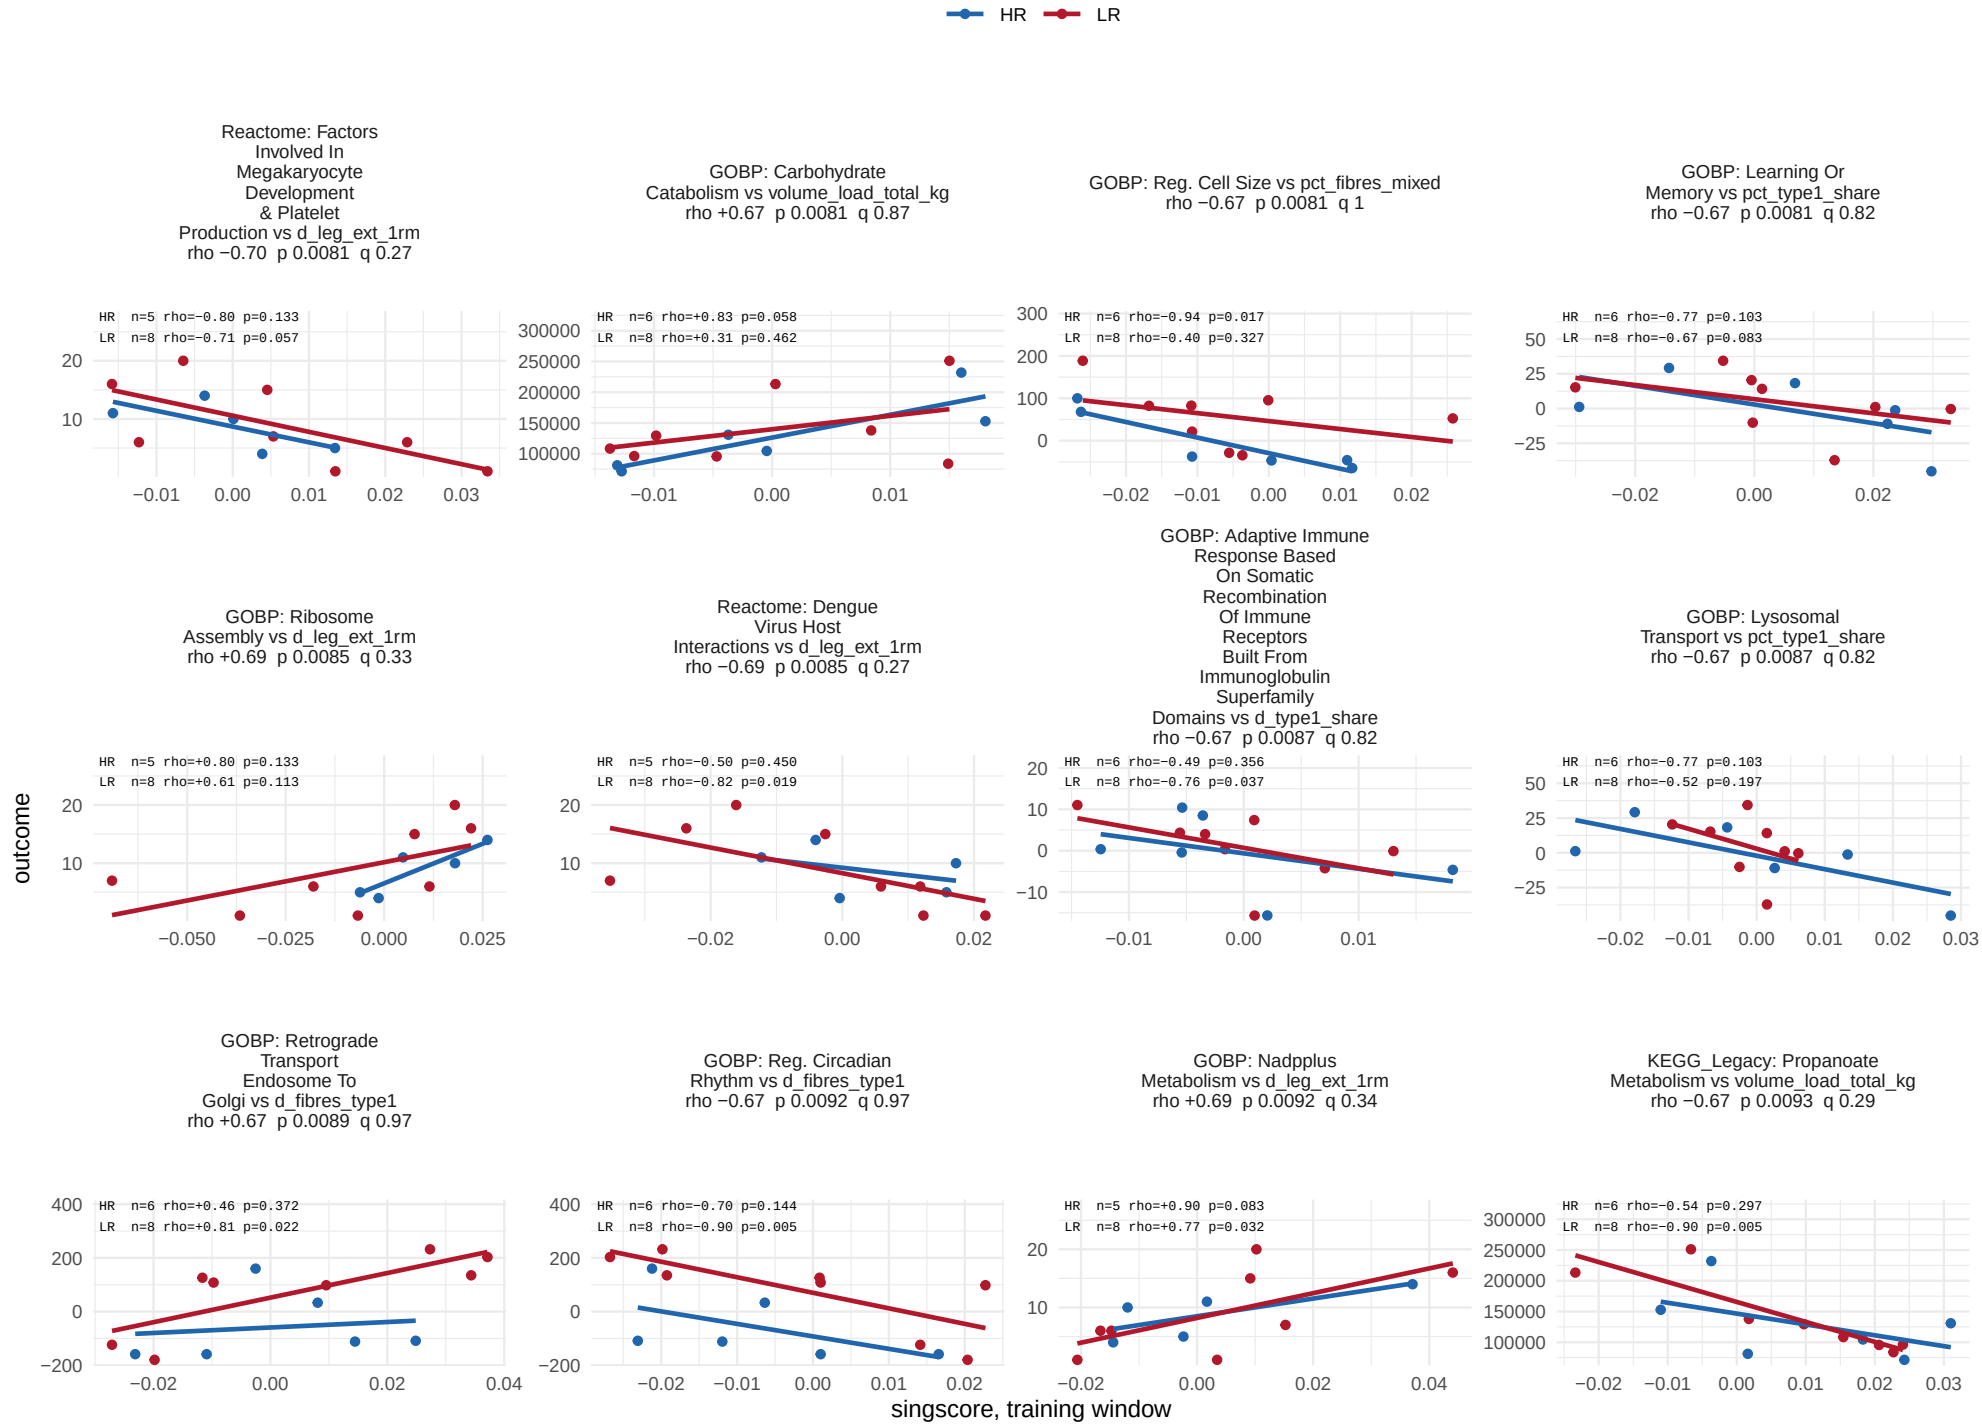

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


923 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

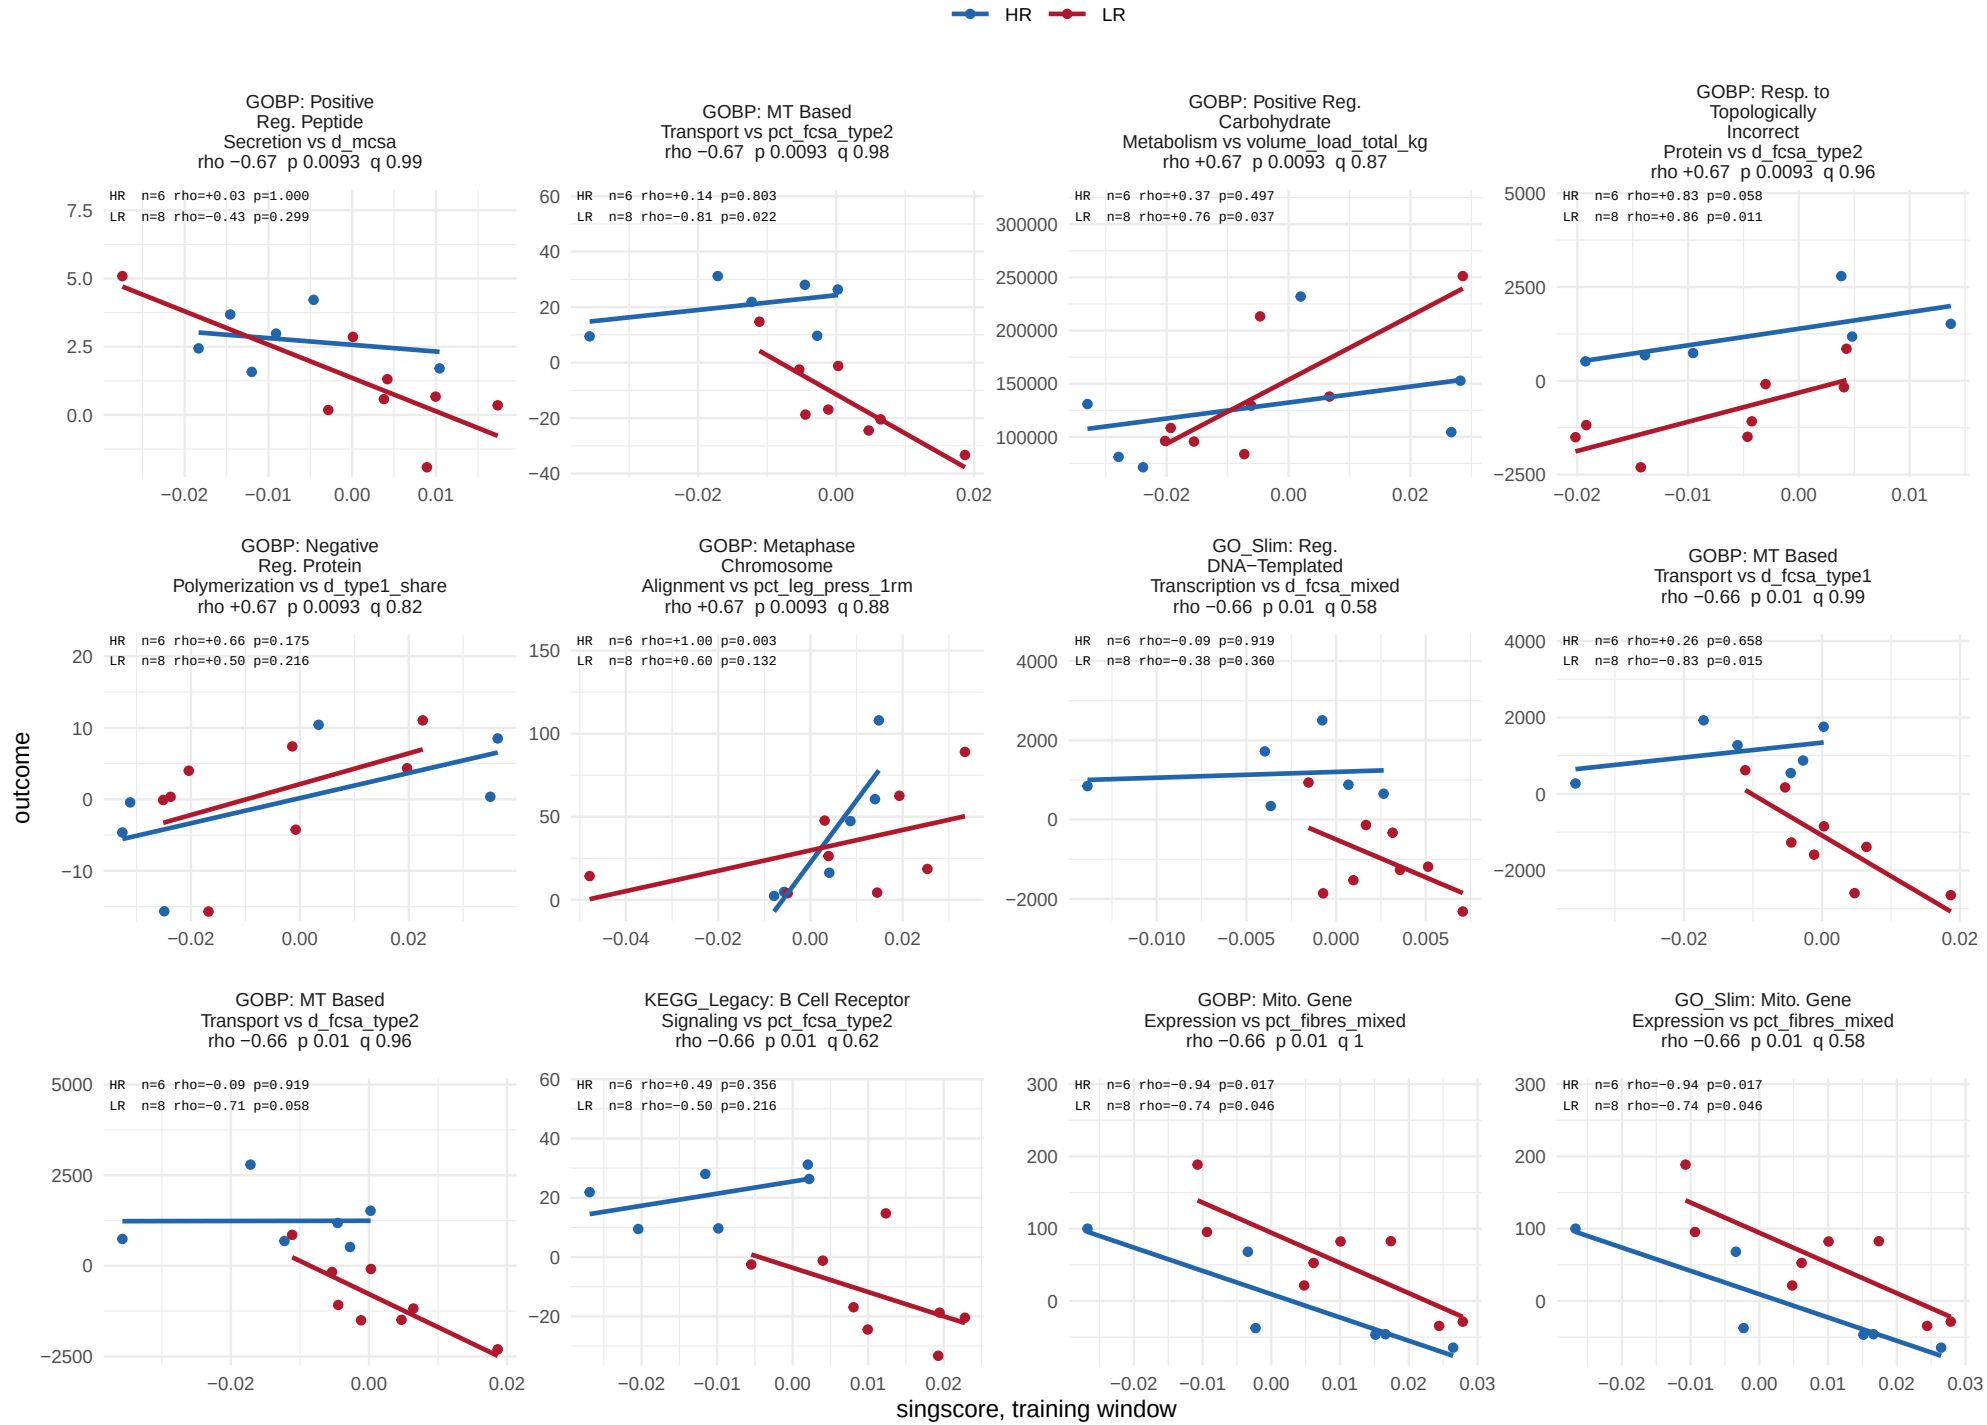

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


923 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

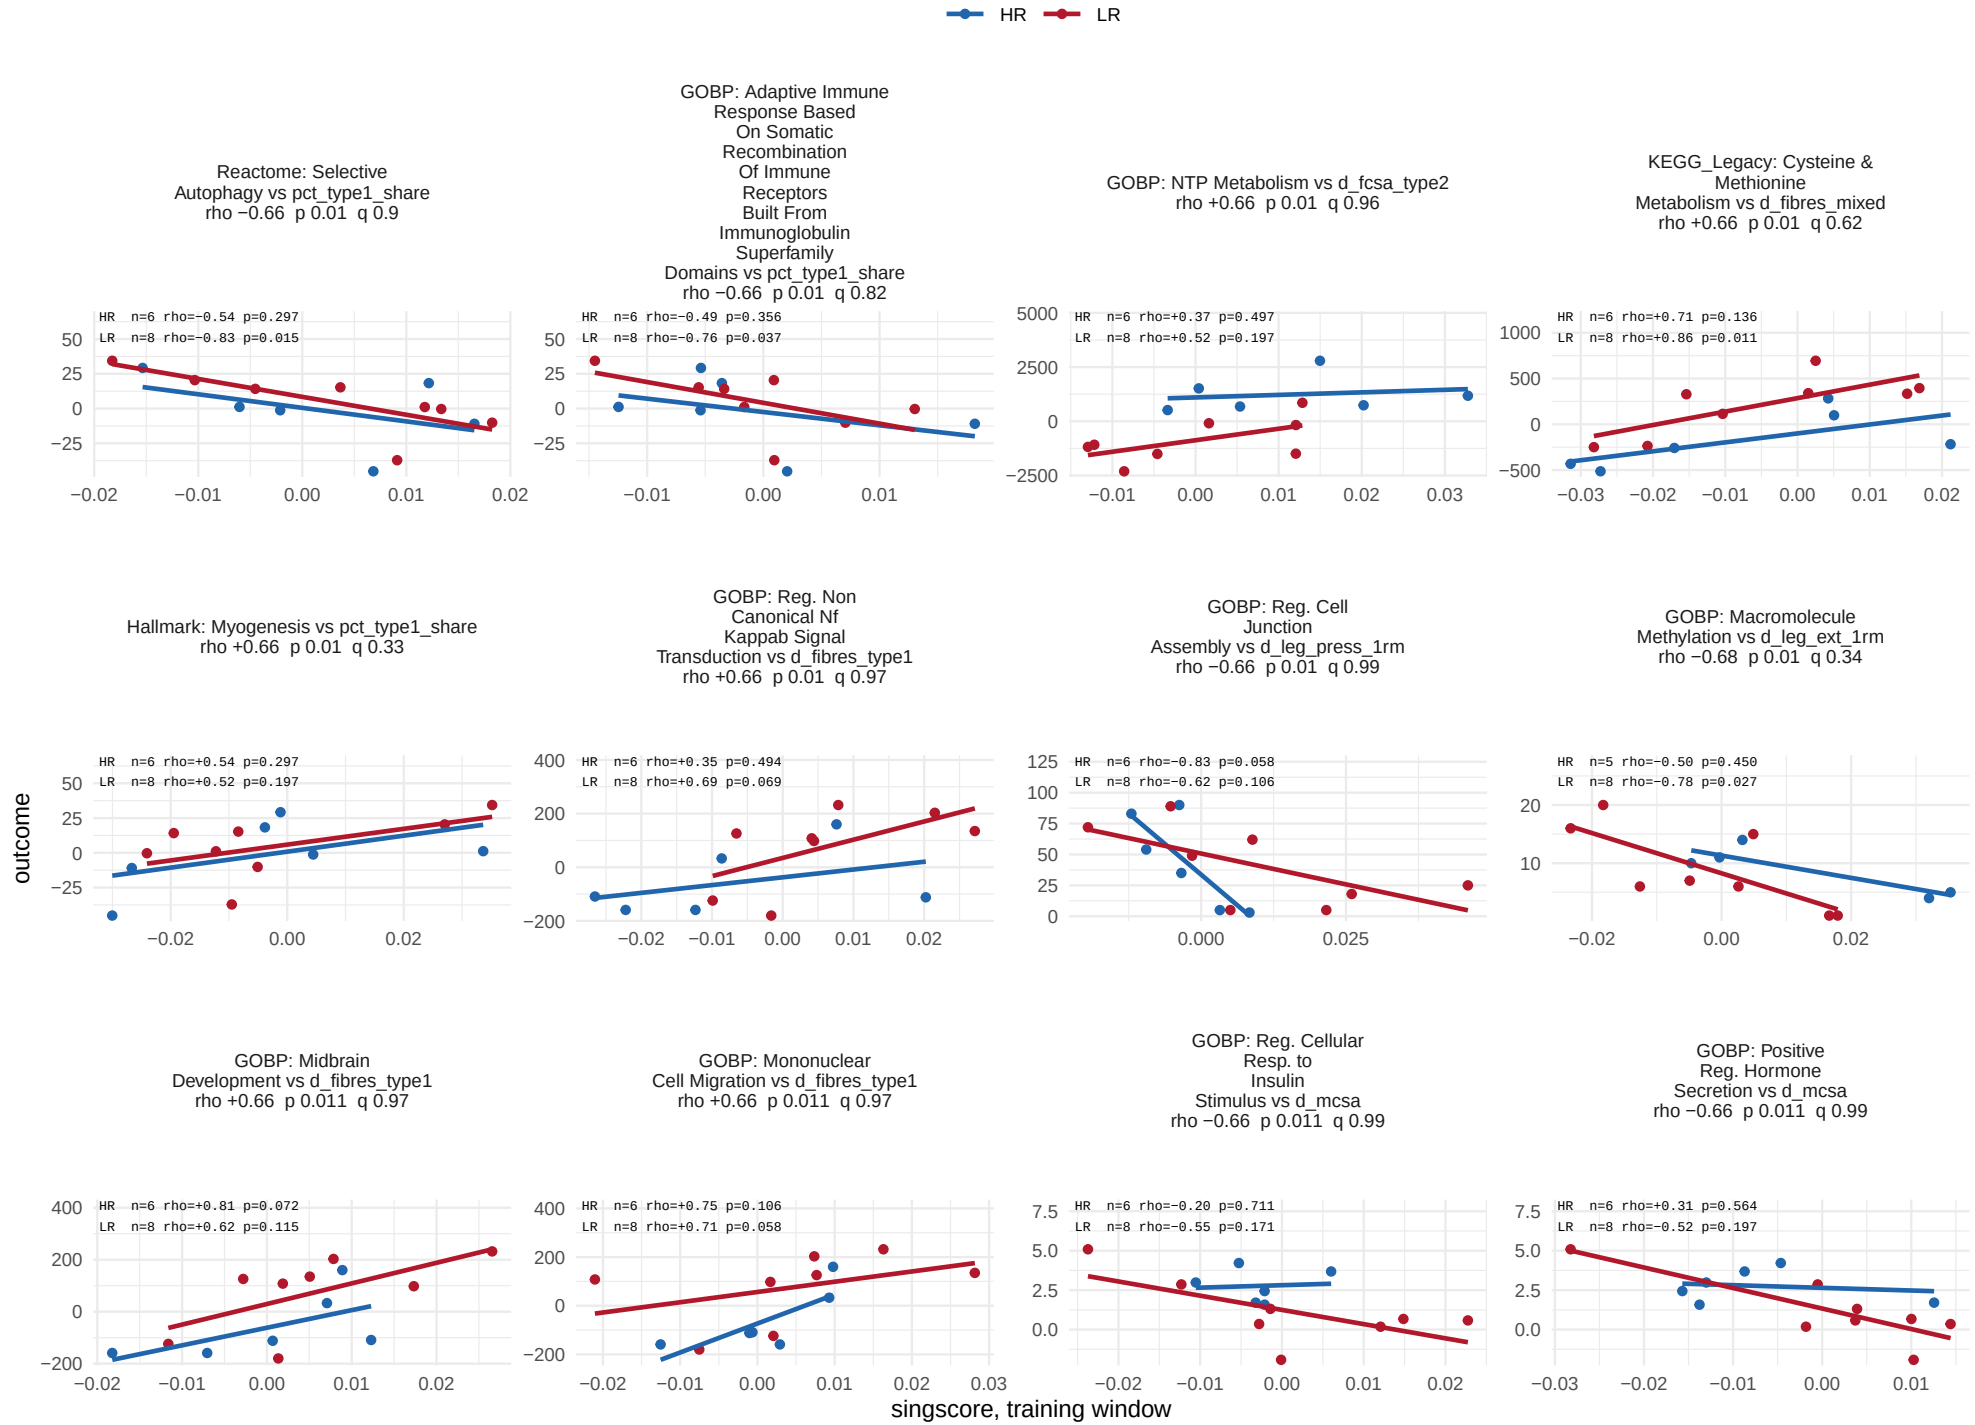

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


923 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

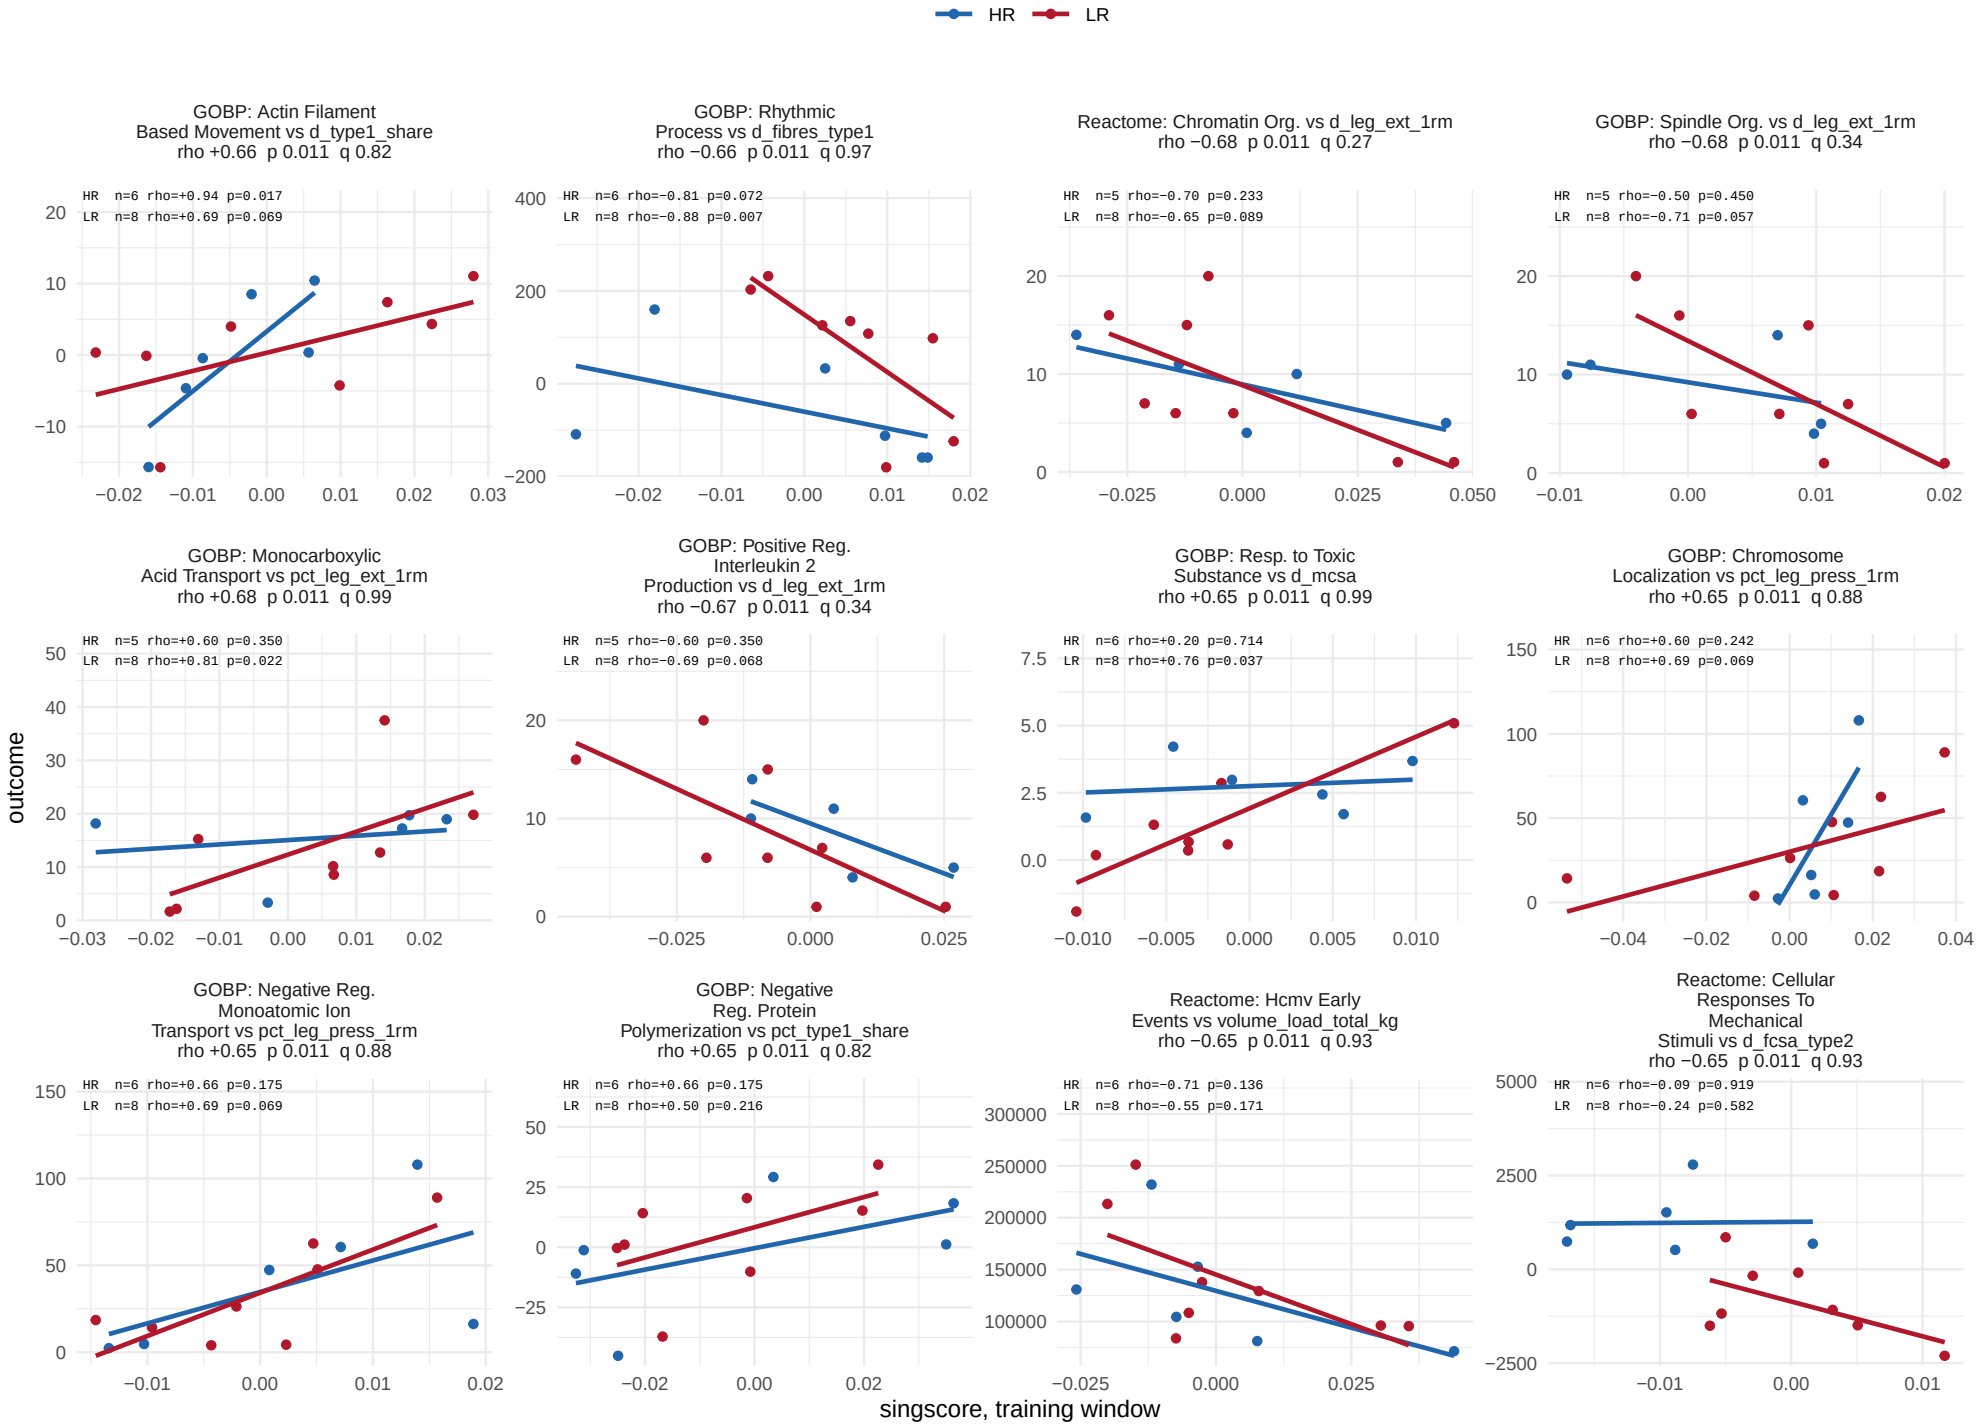

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


923 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

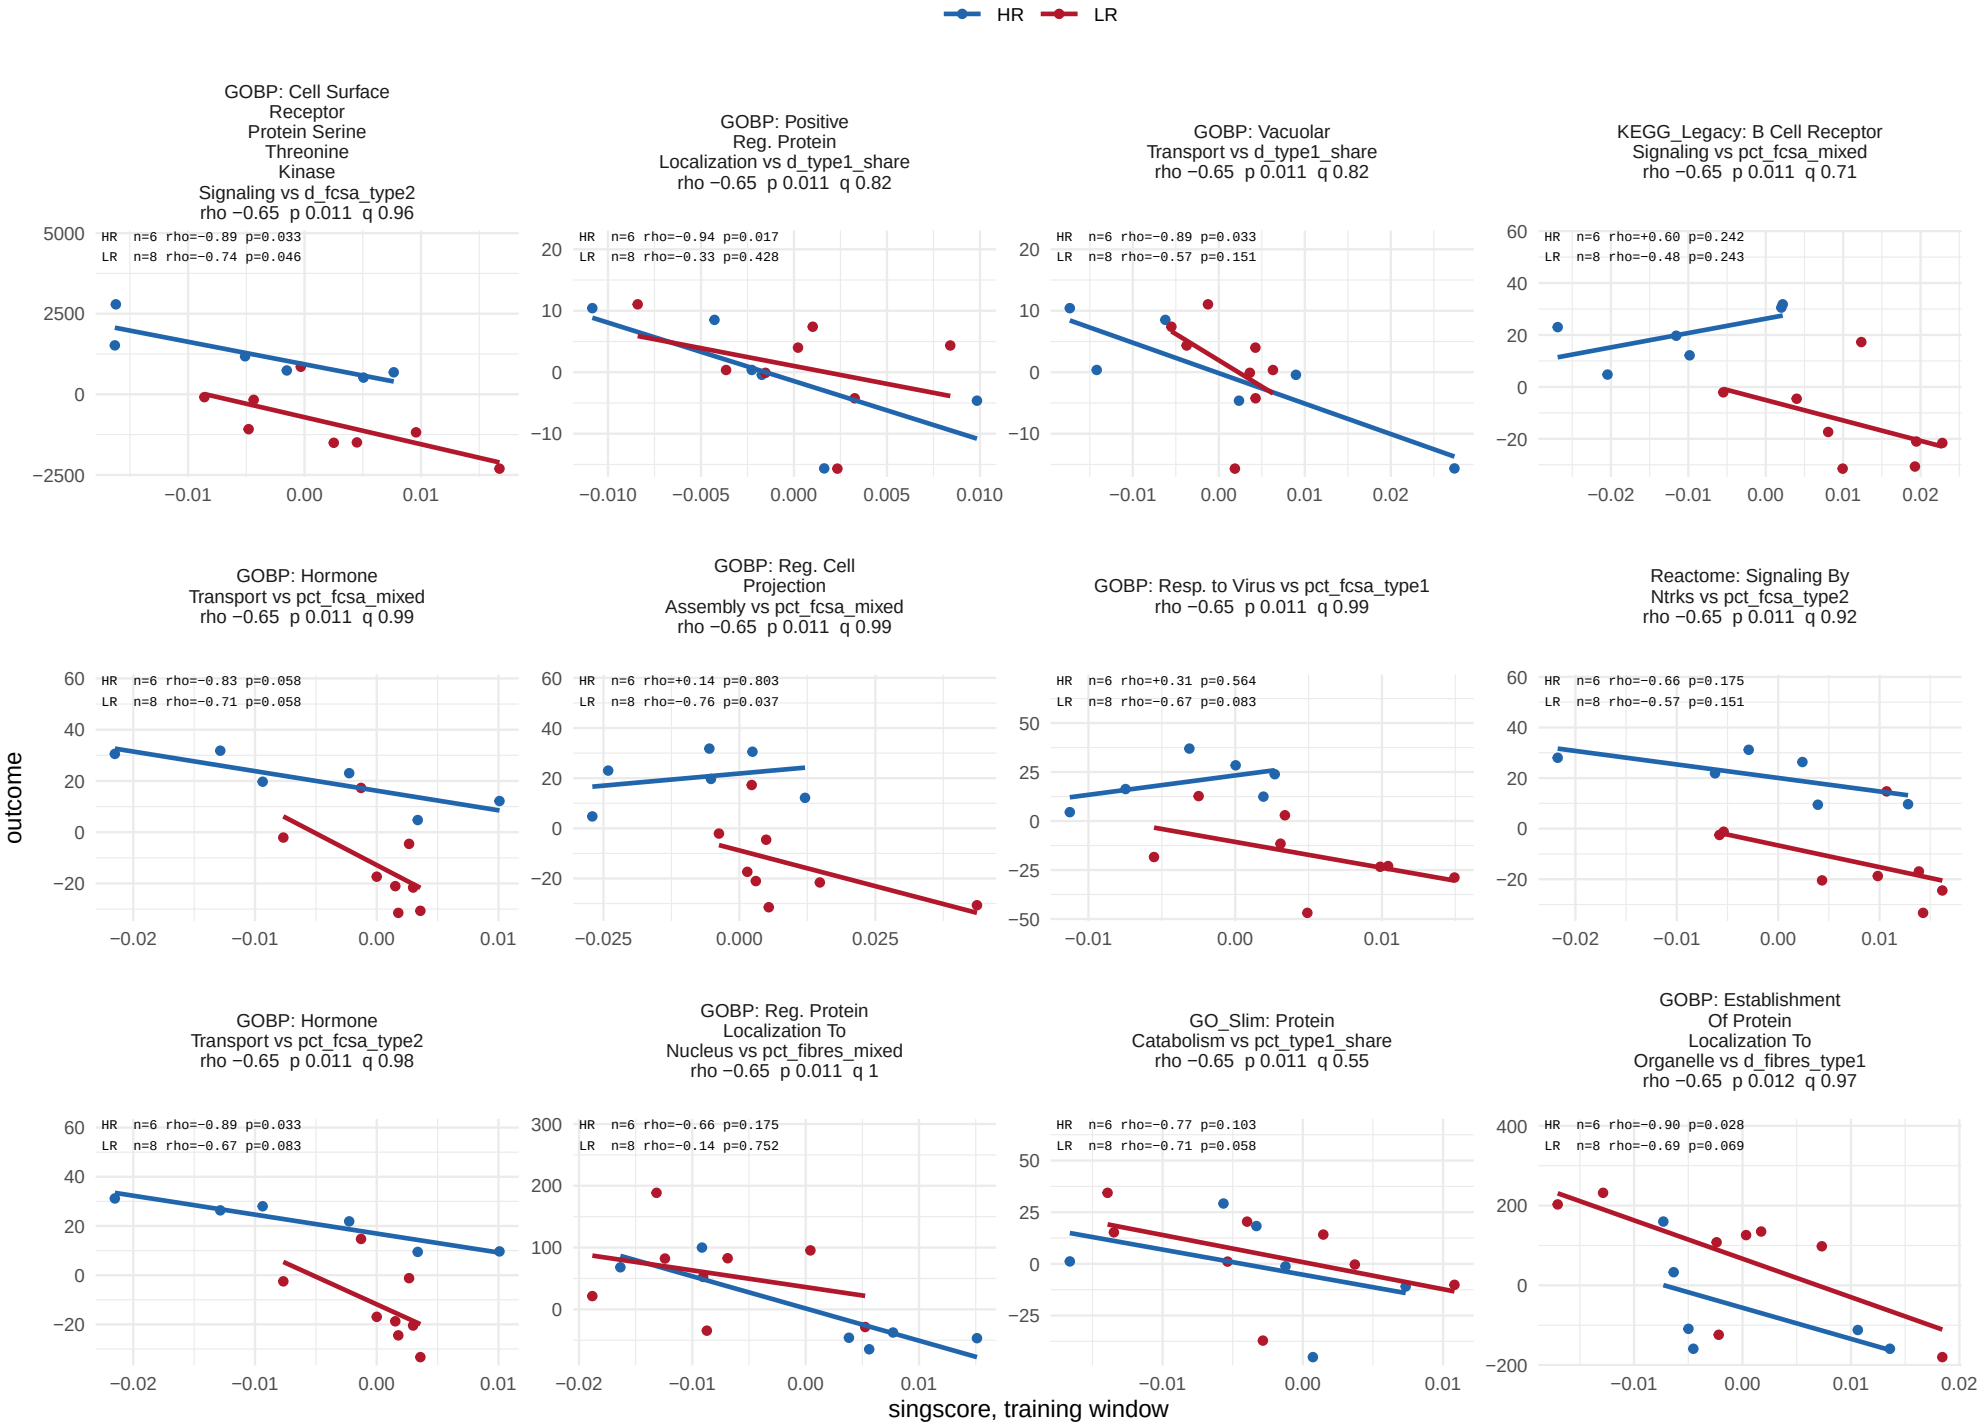

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


923 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

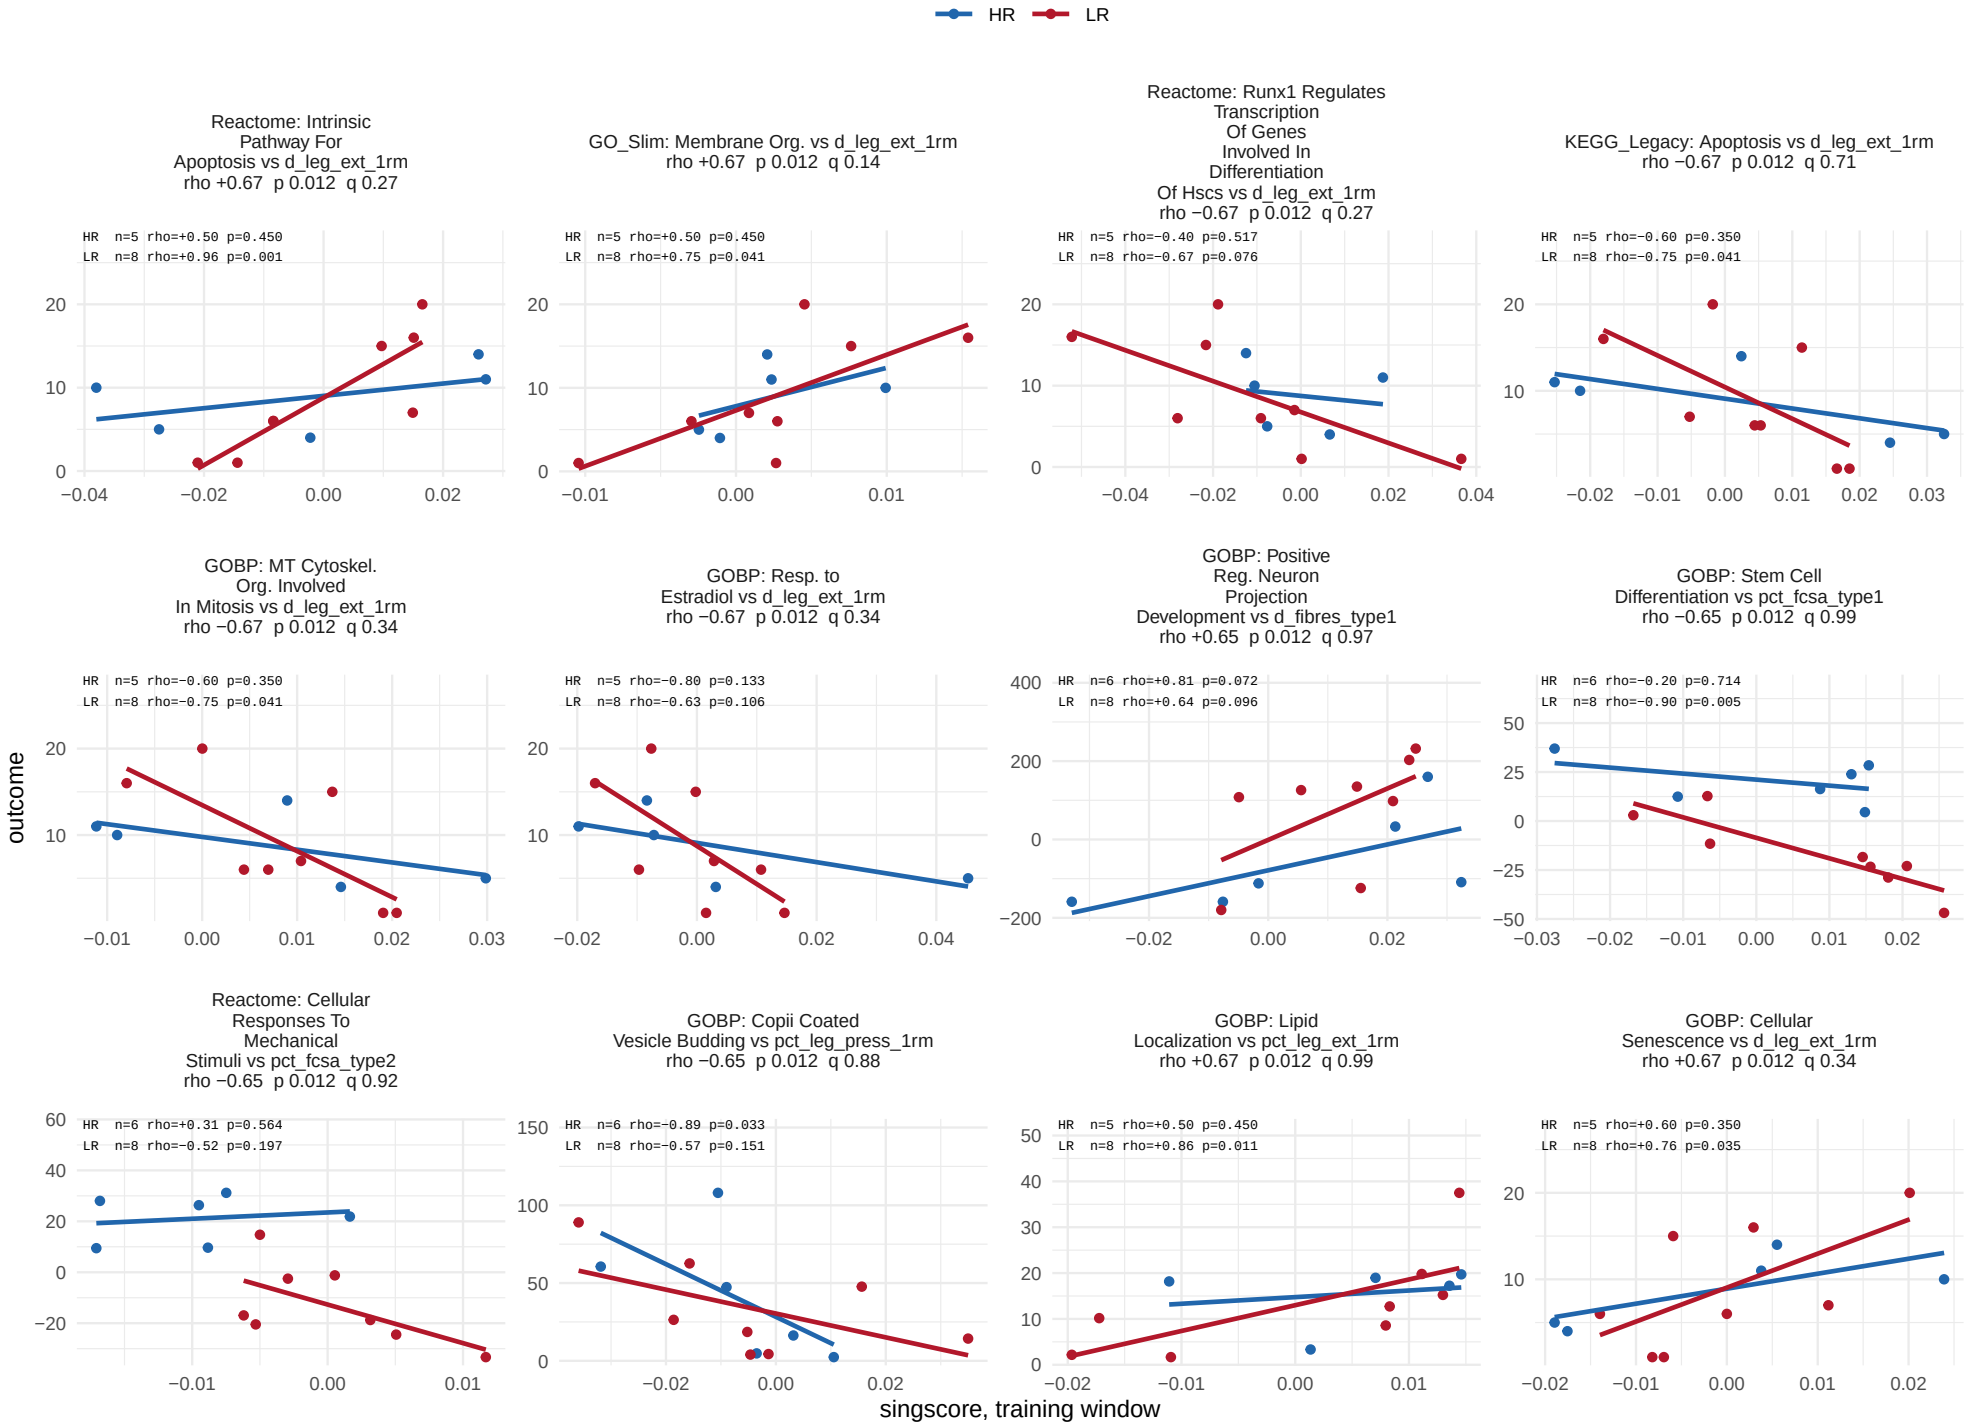

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


923 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

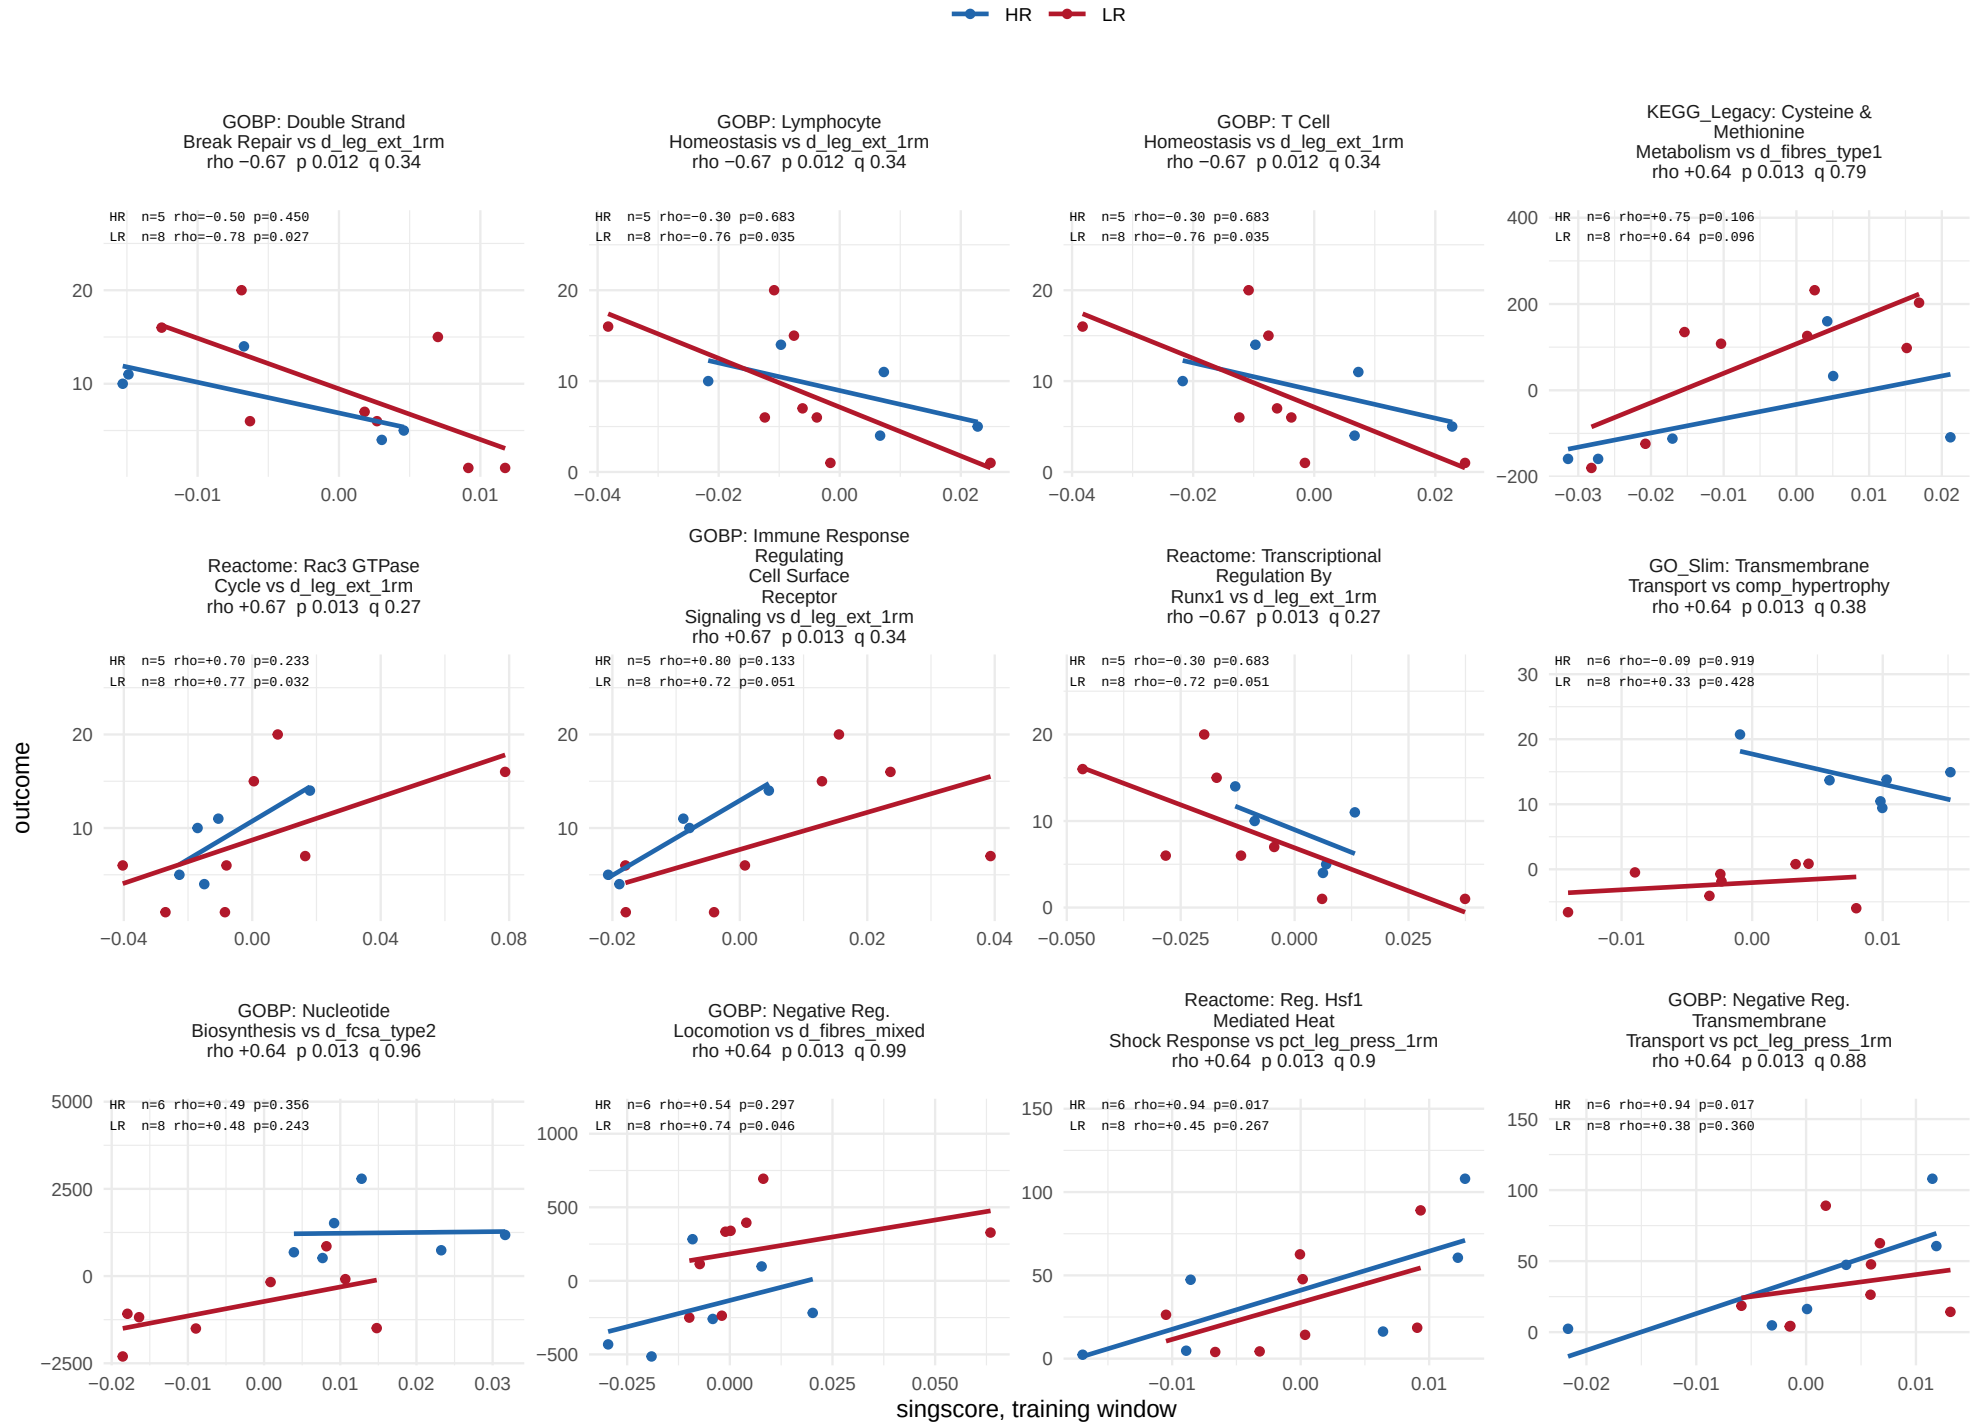

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


923 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

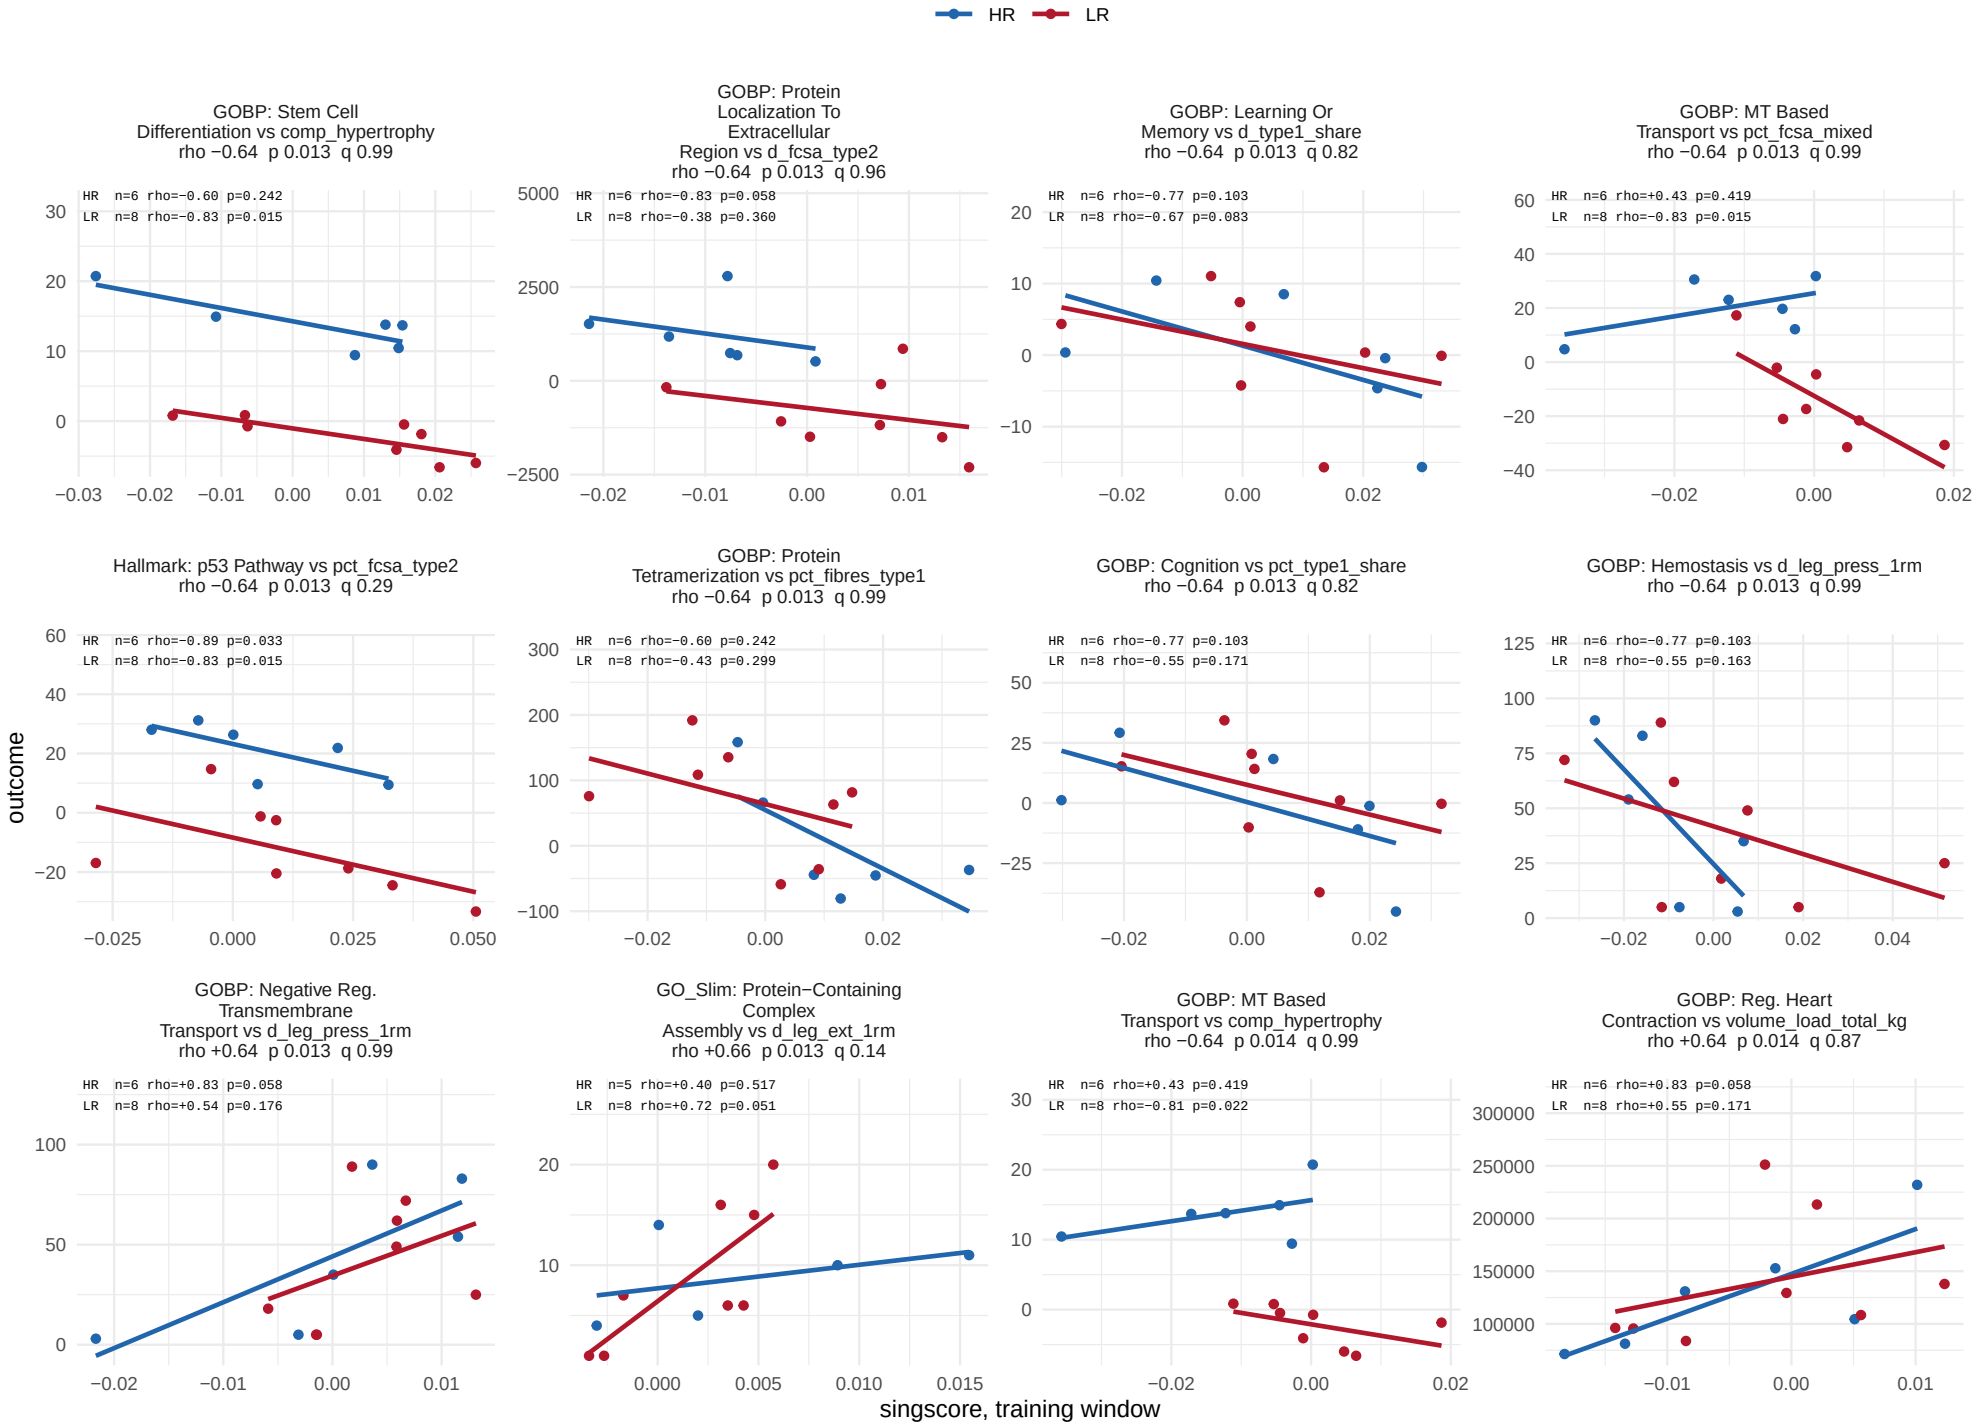

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


923 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

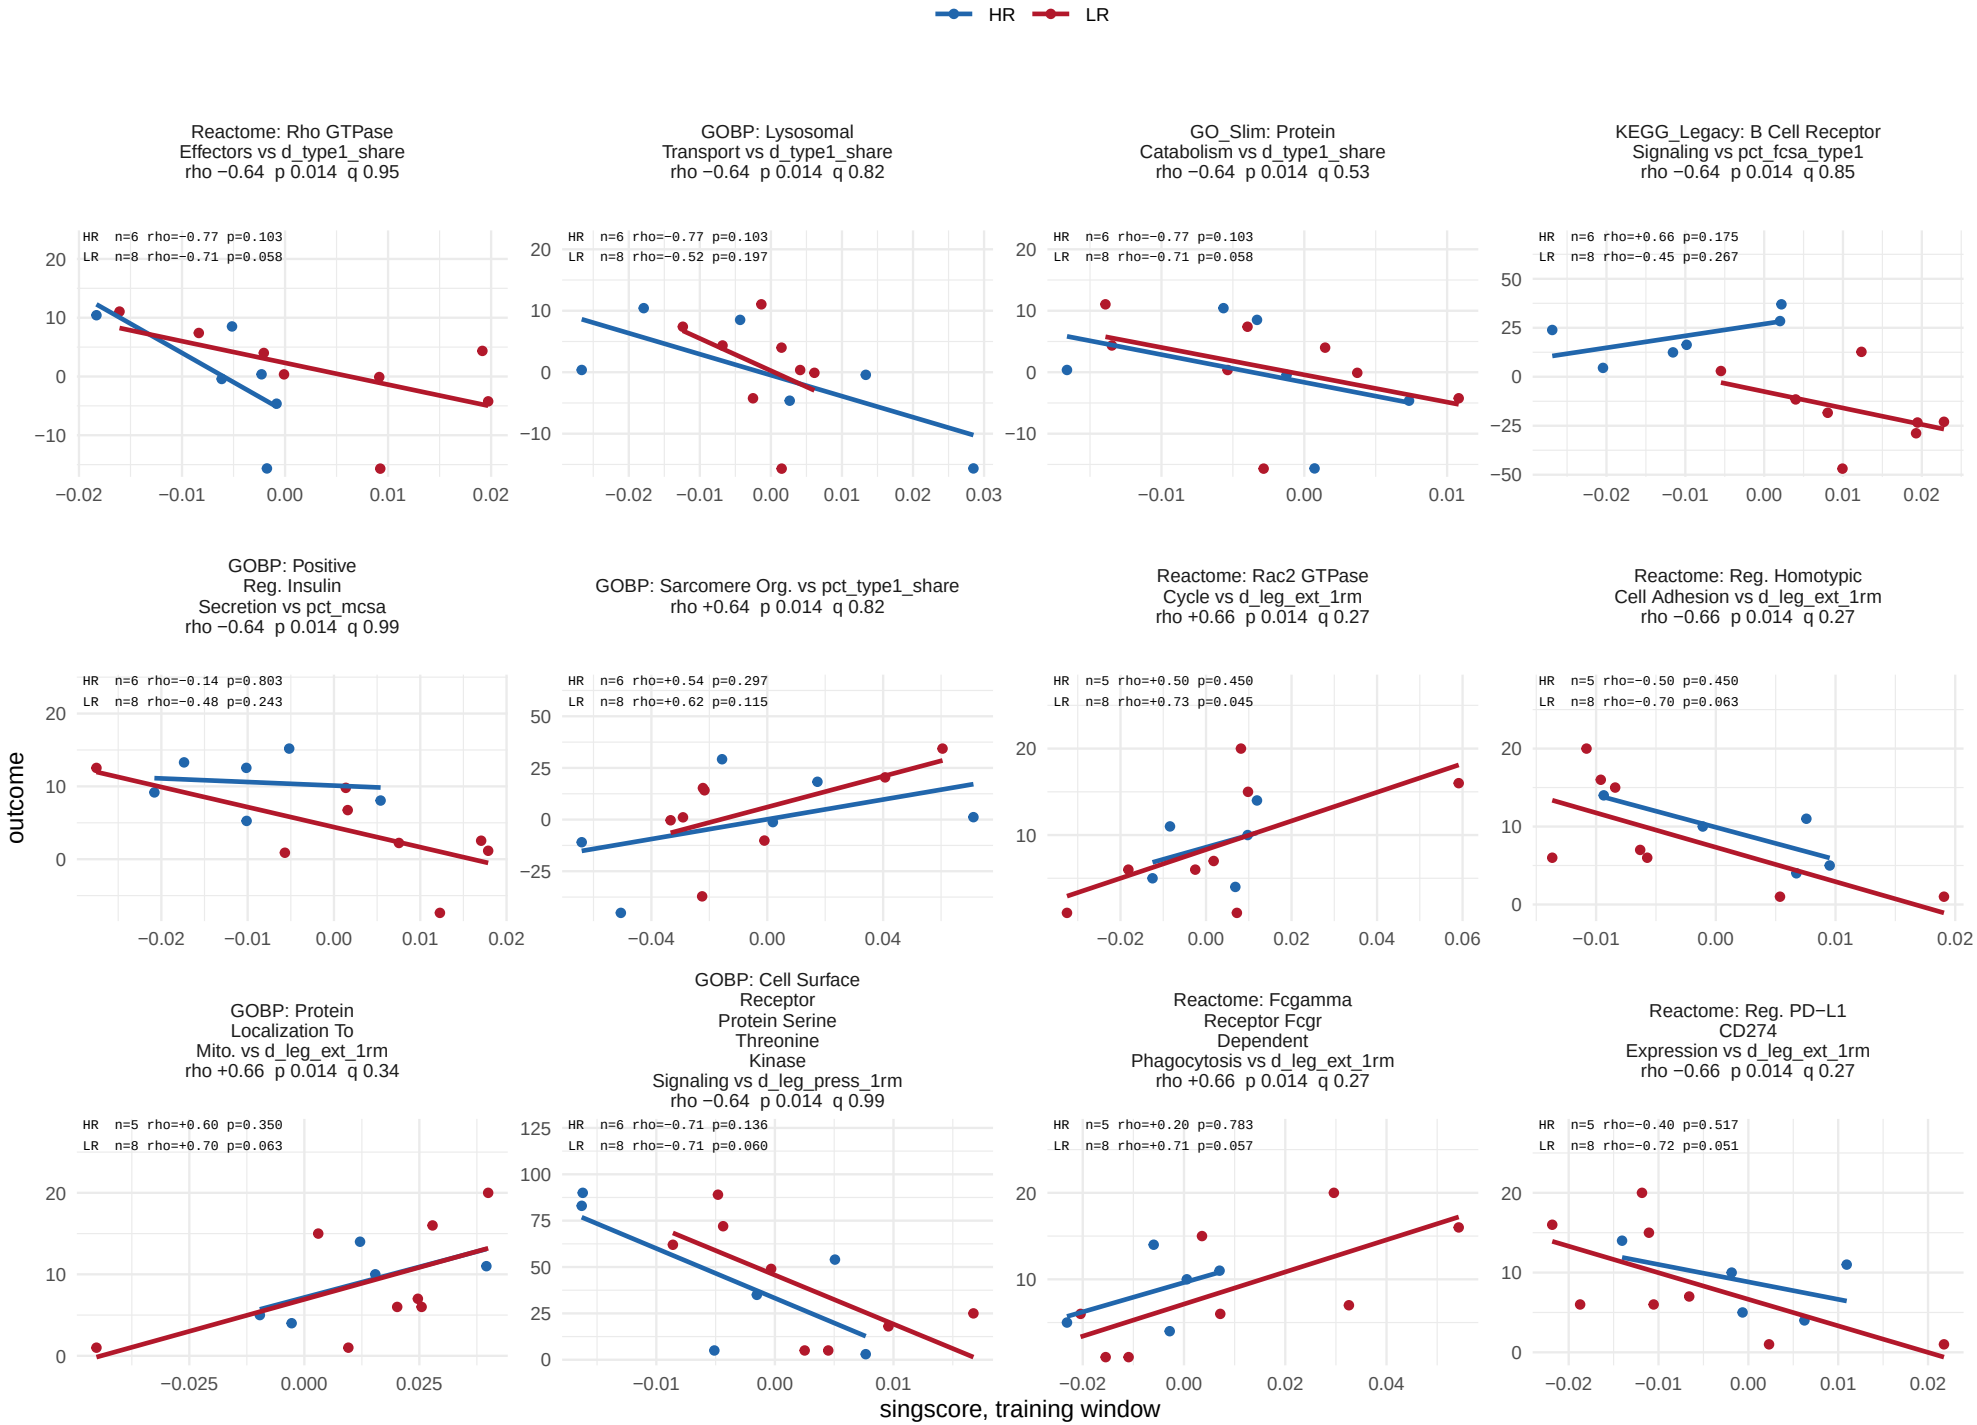

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


923 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

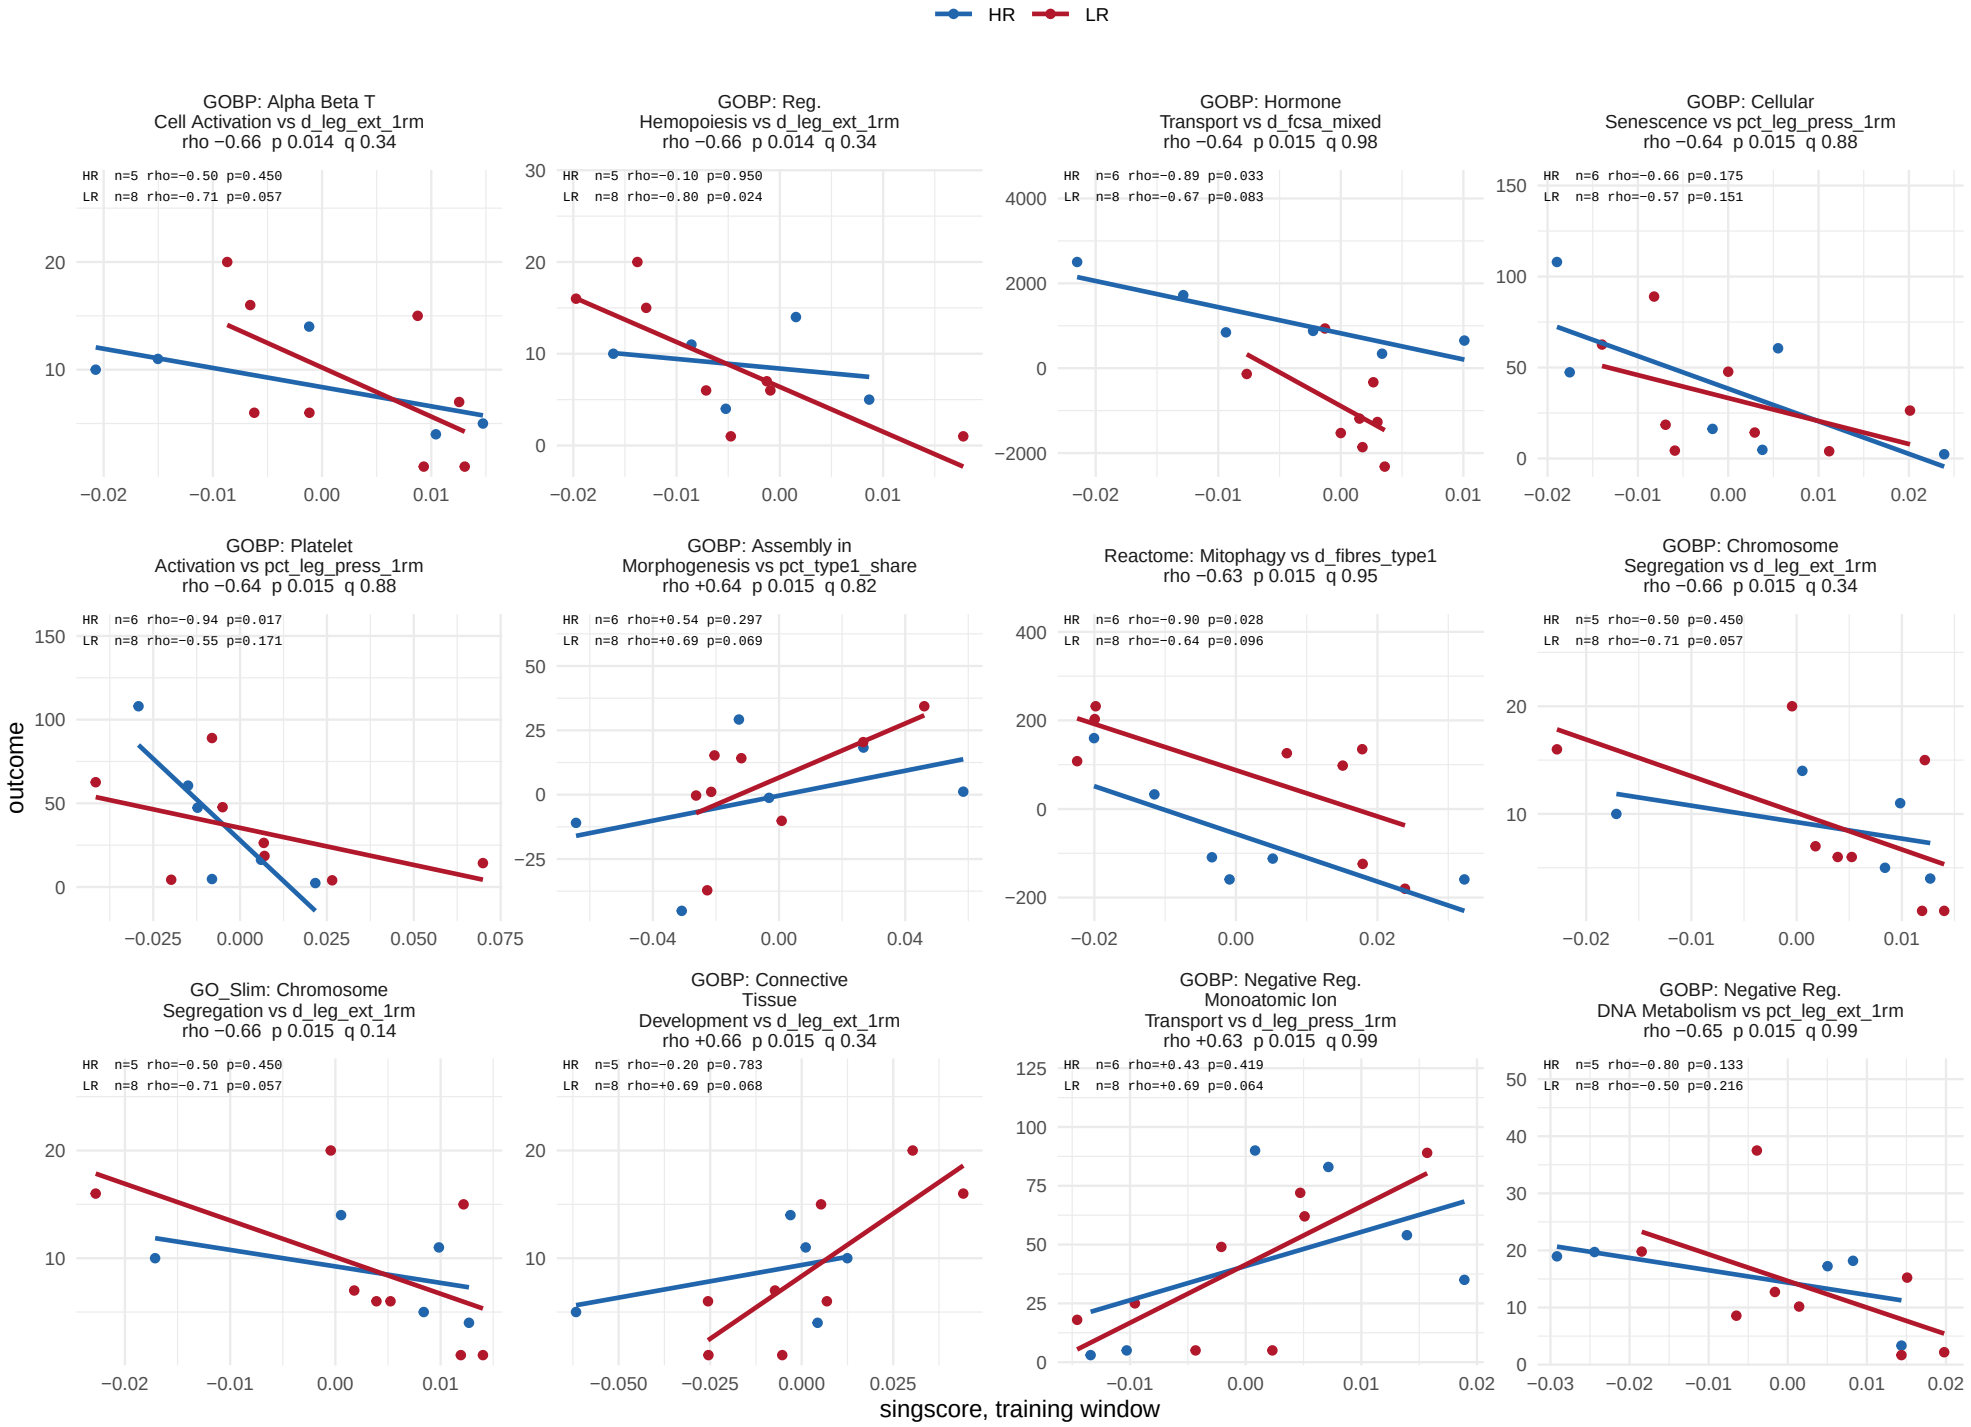

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


923 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

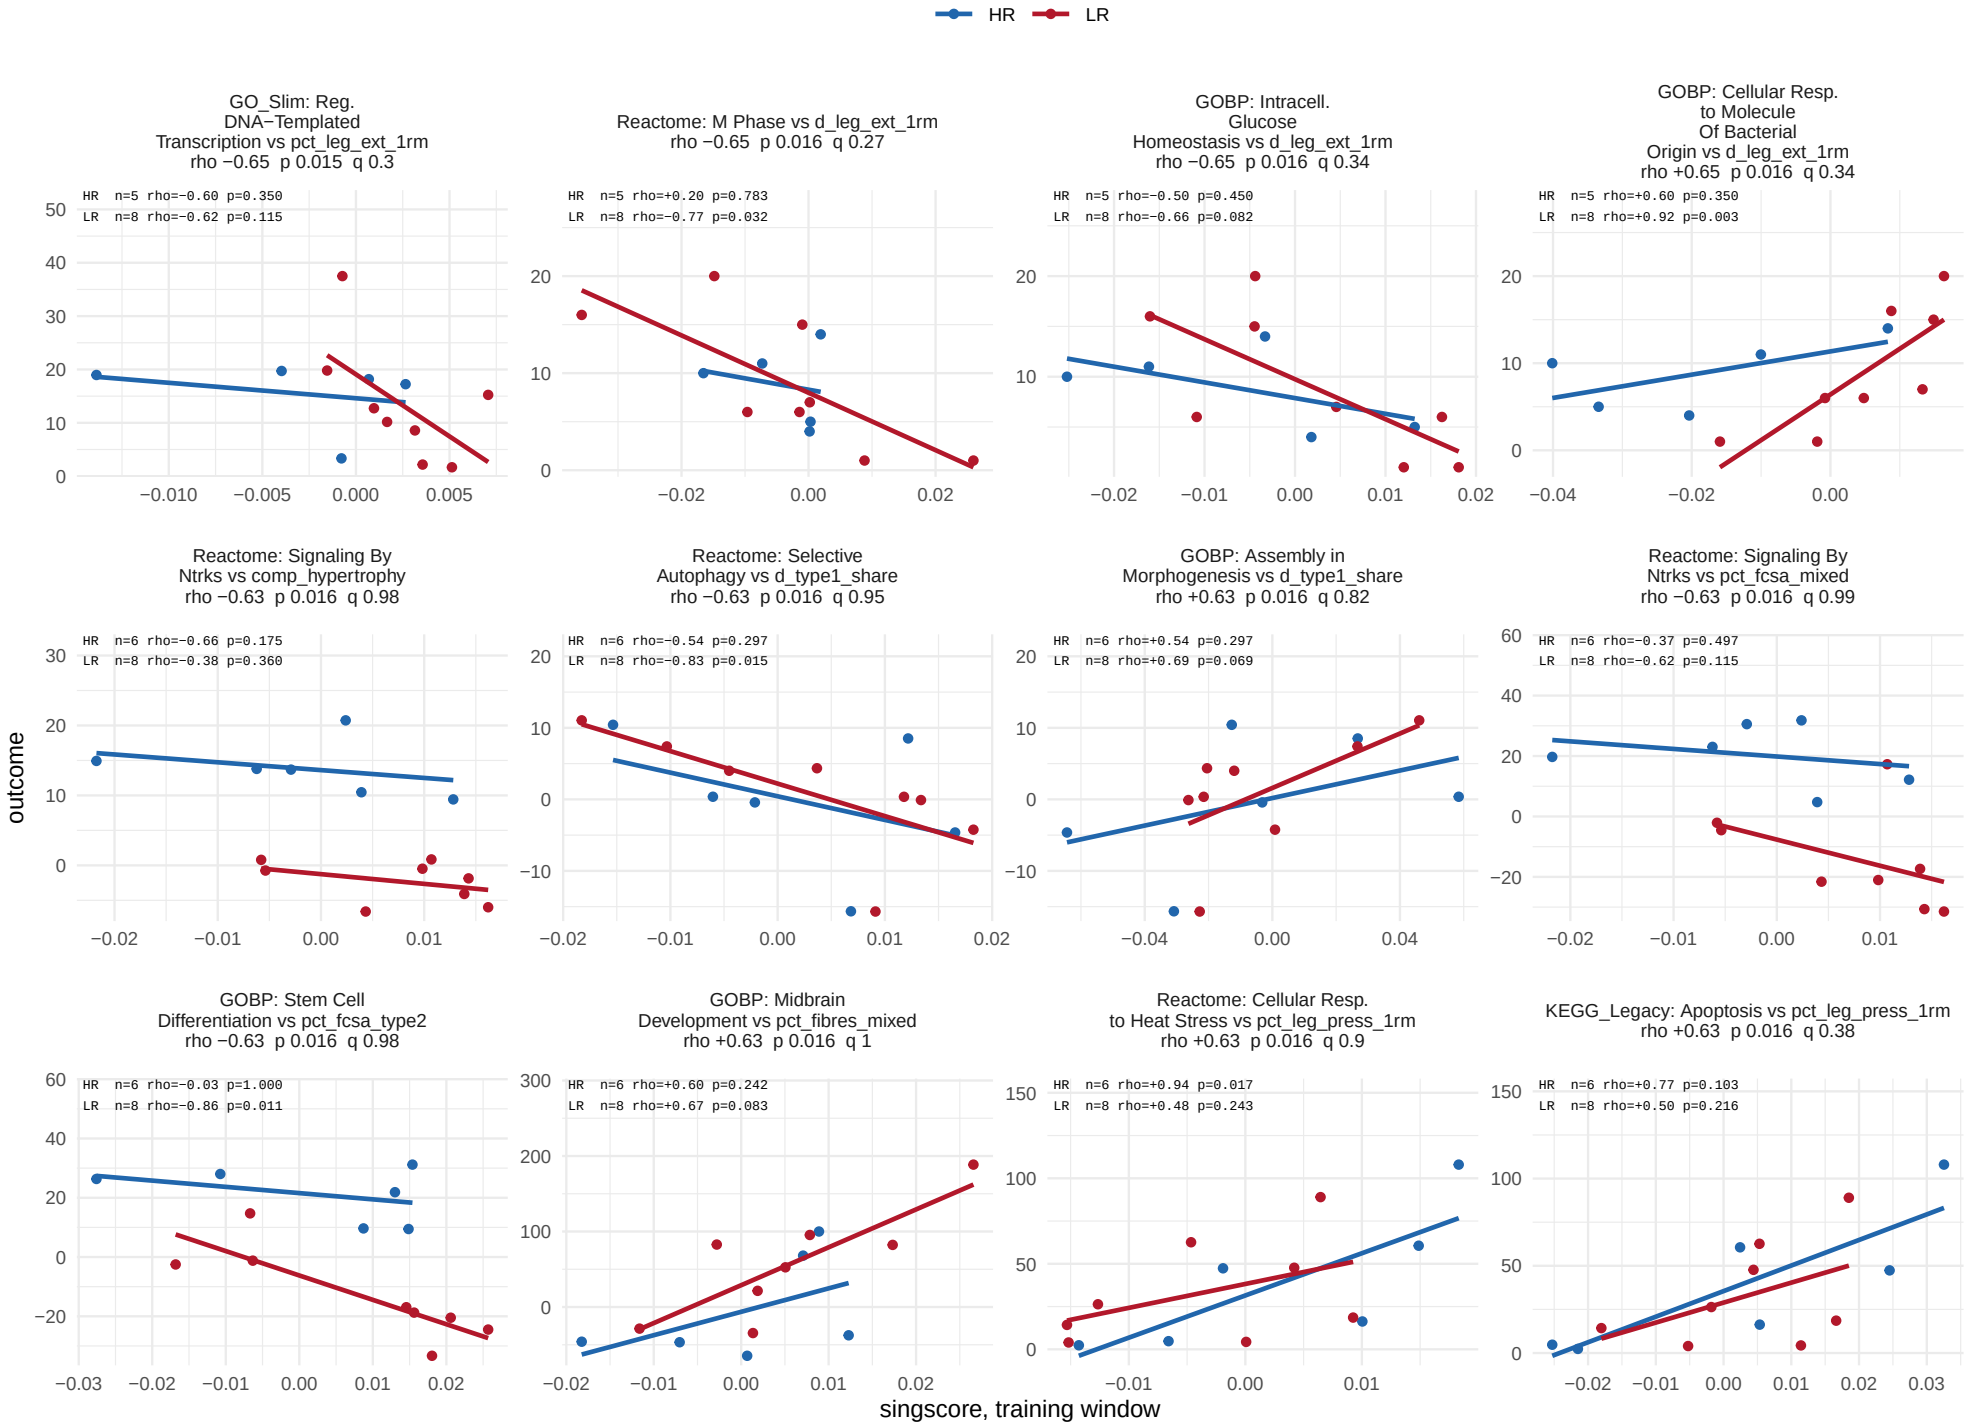

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


923 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

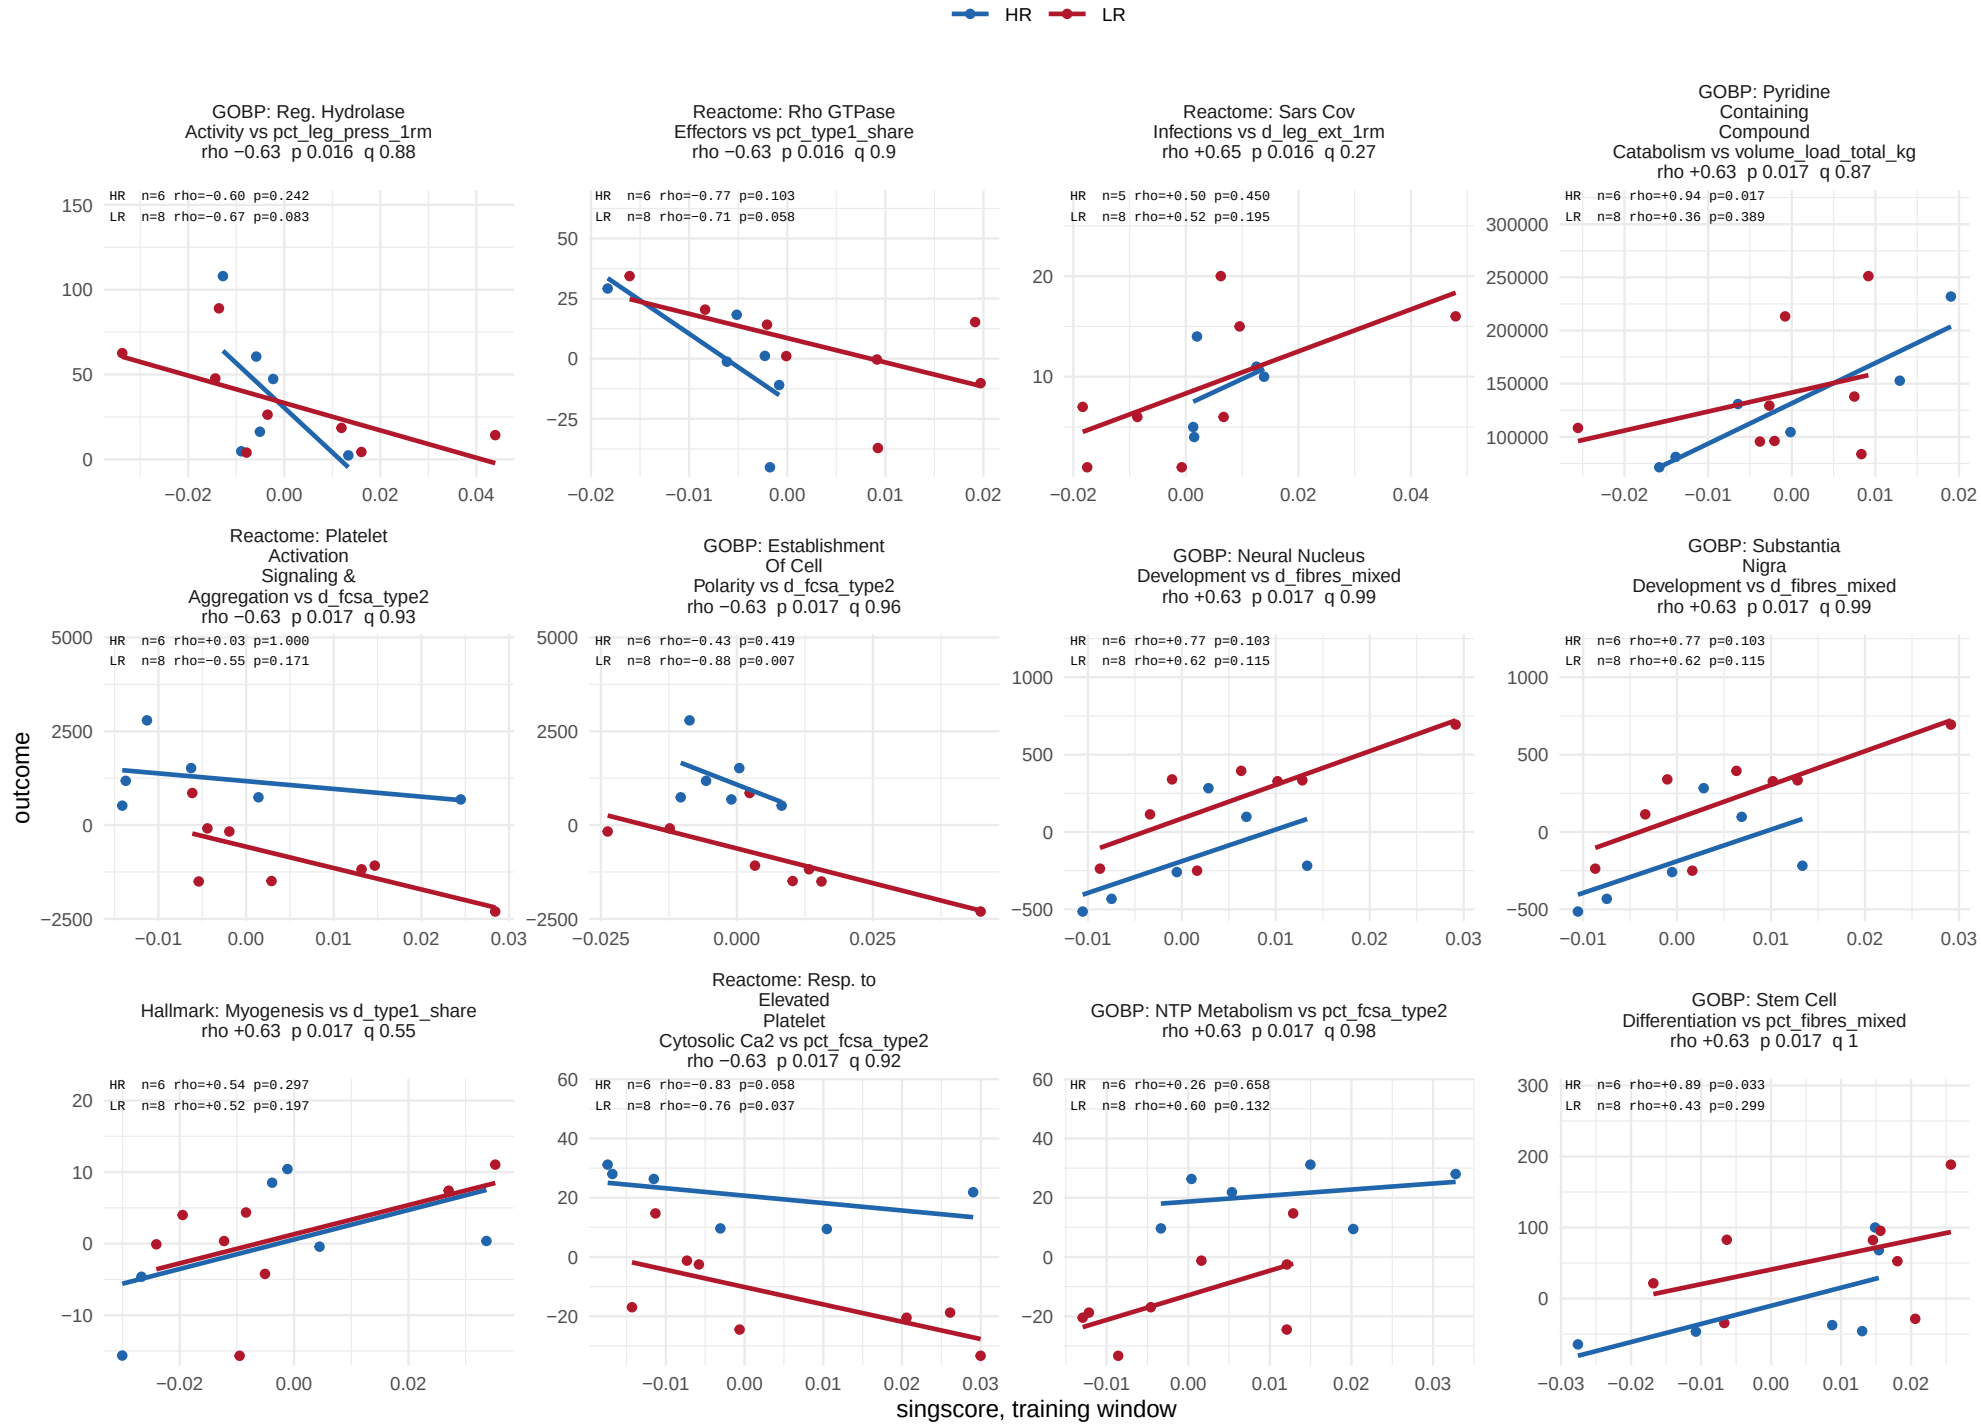

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


923 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

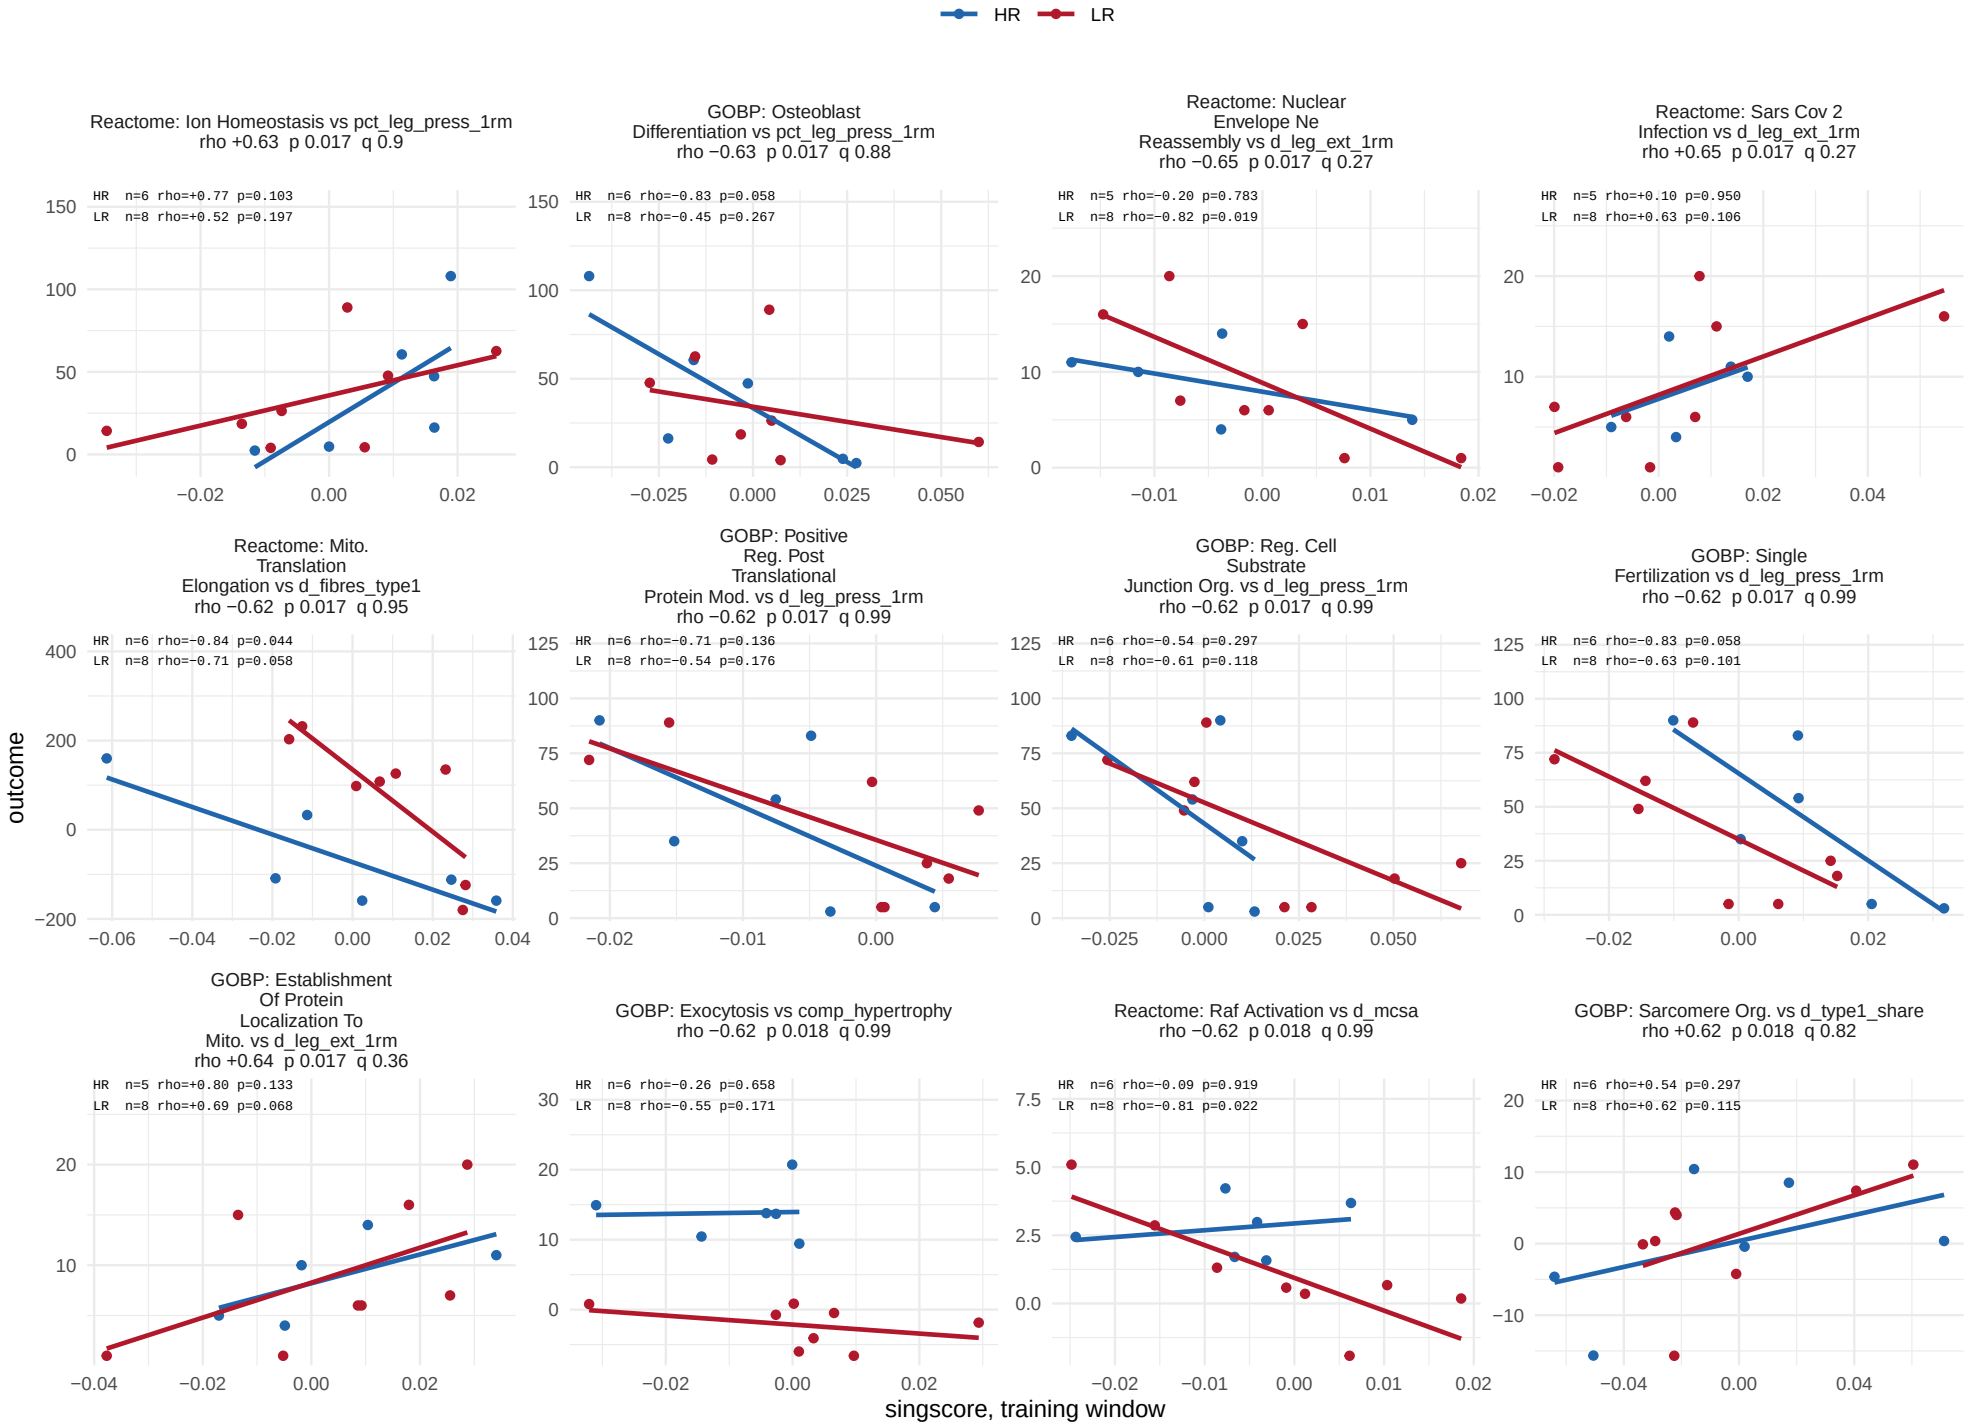

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


923 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

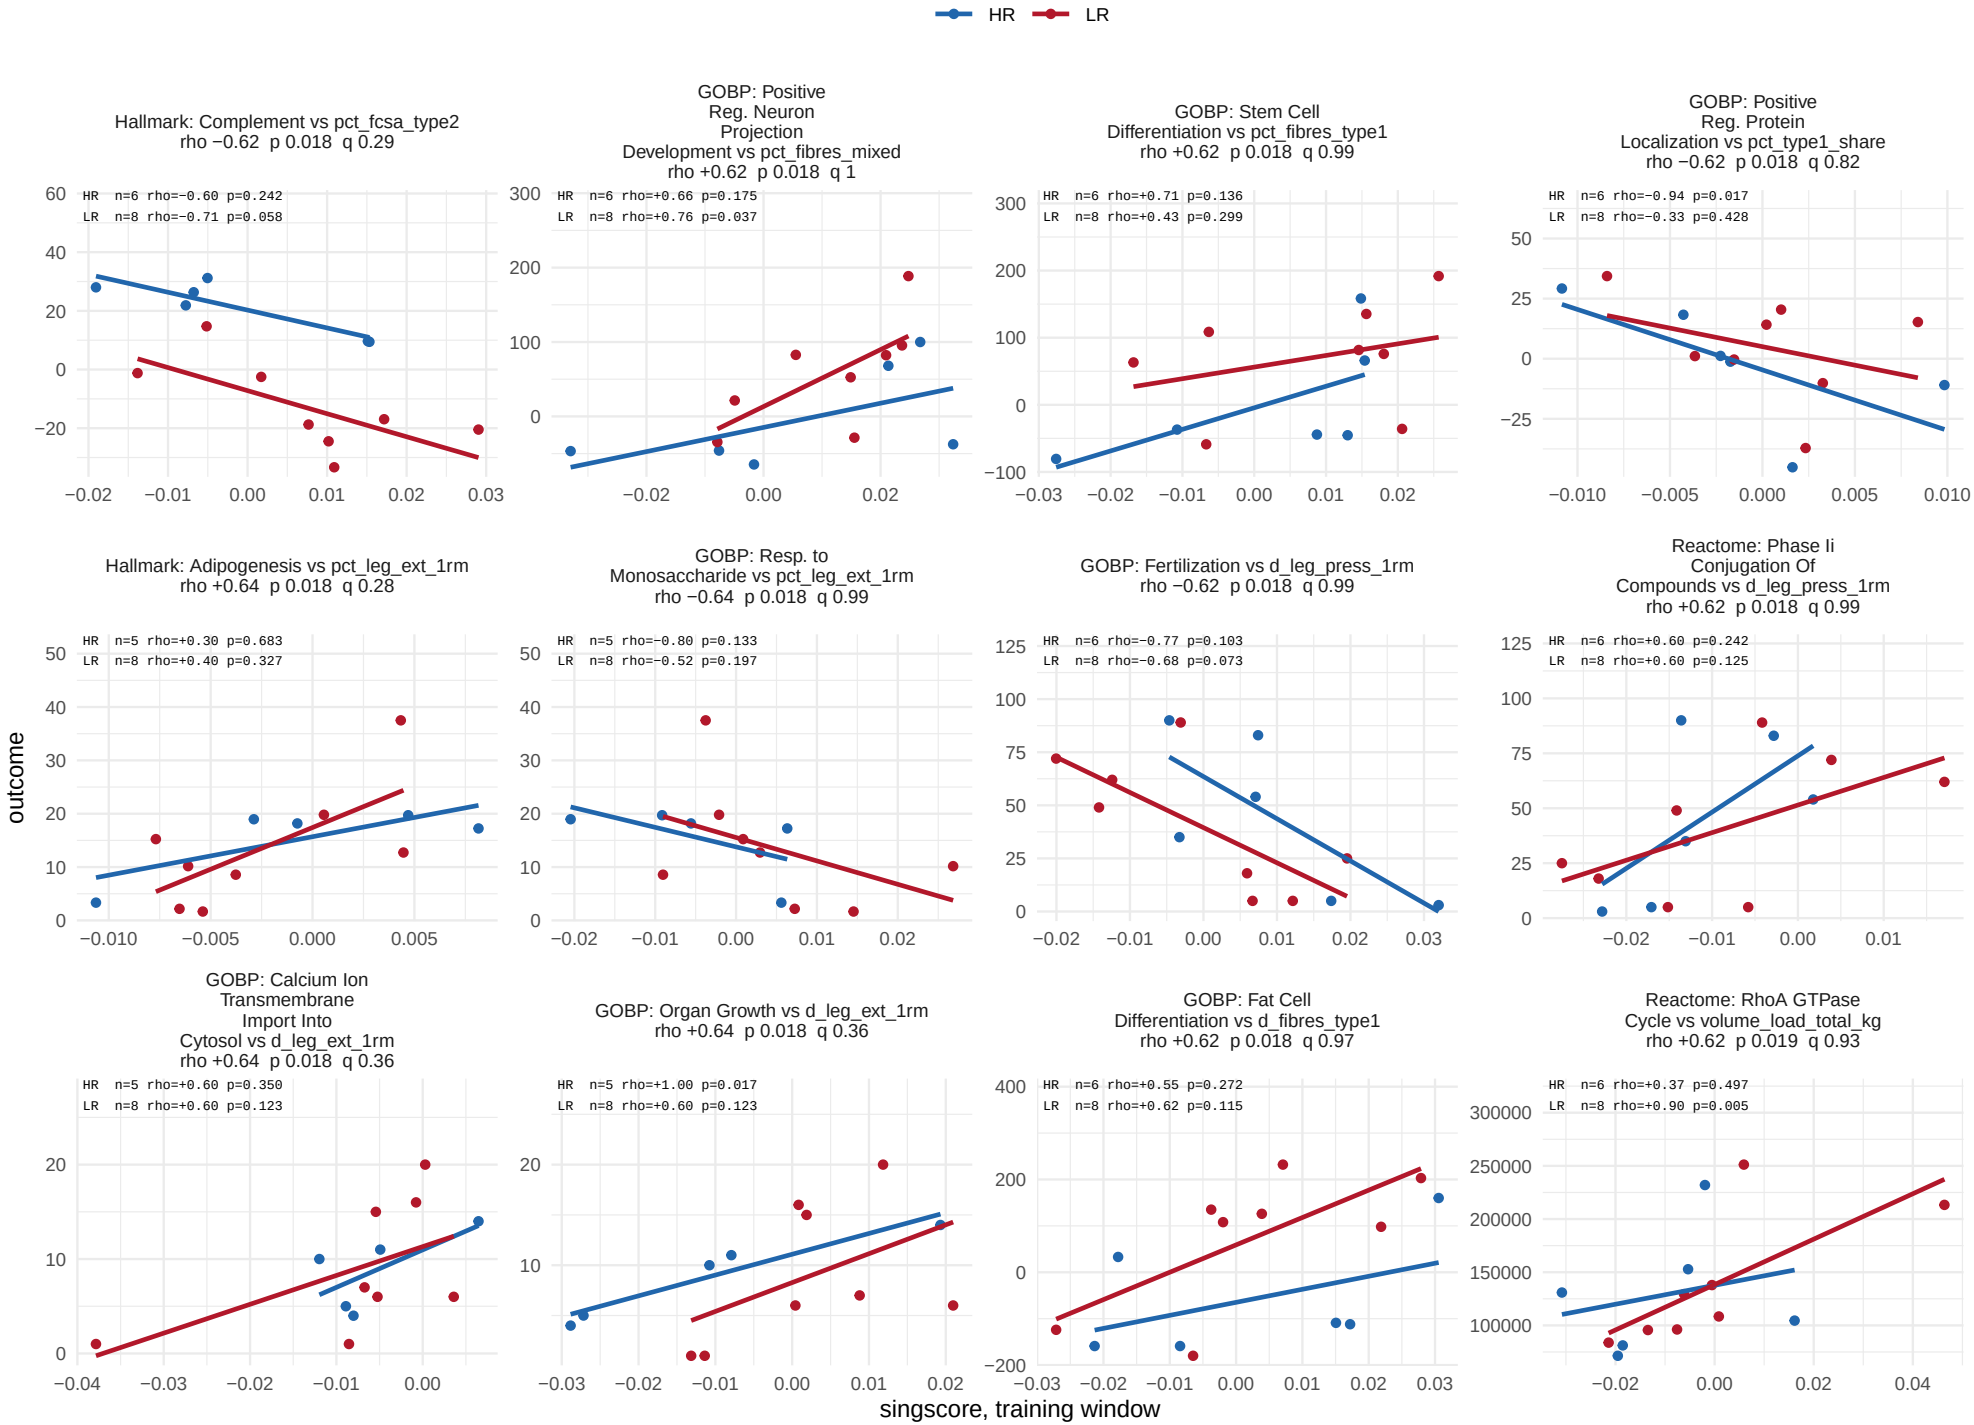

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


923 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

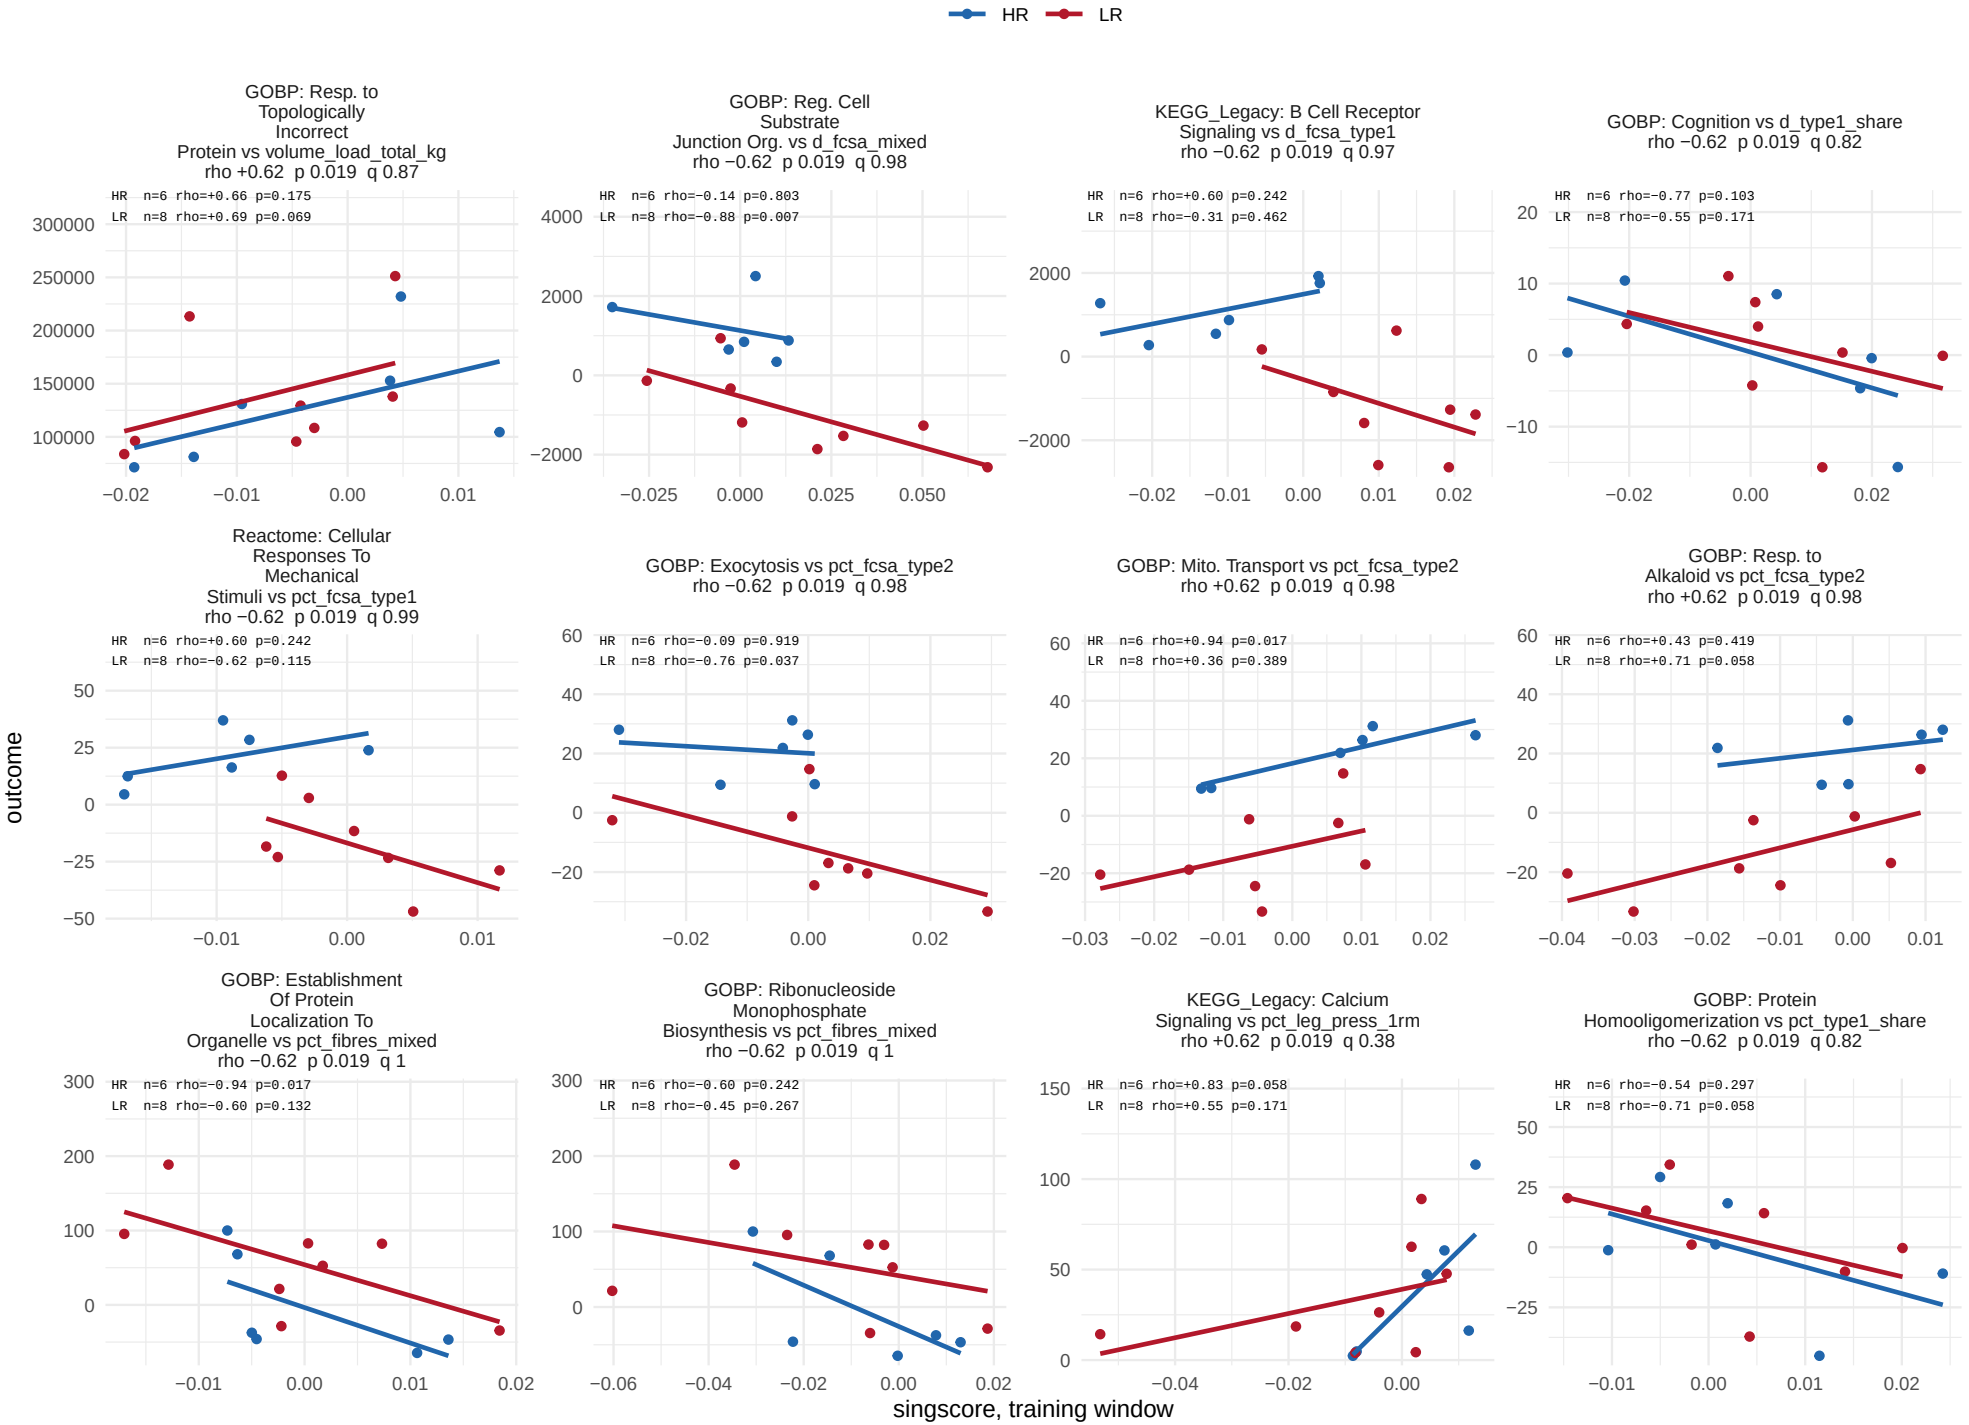

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


923 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

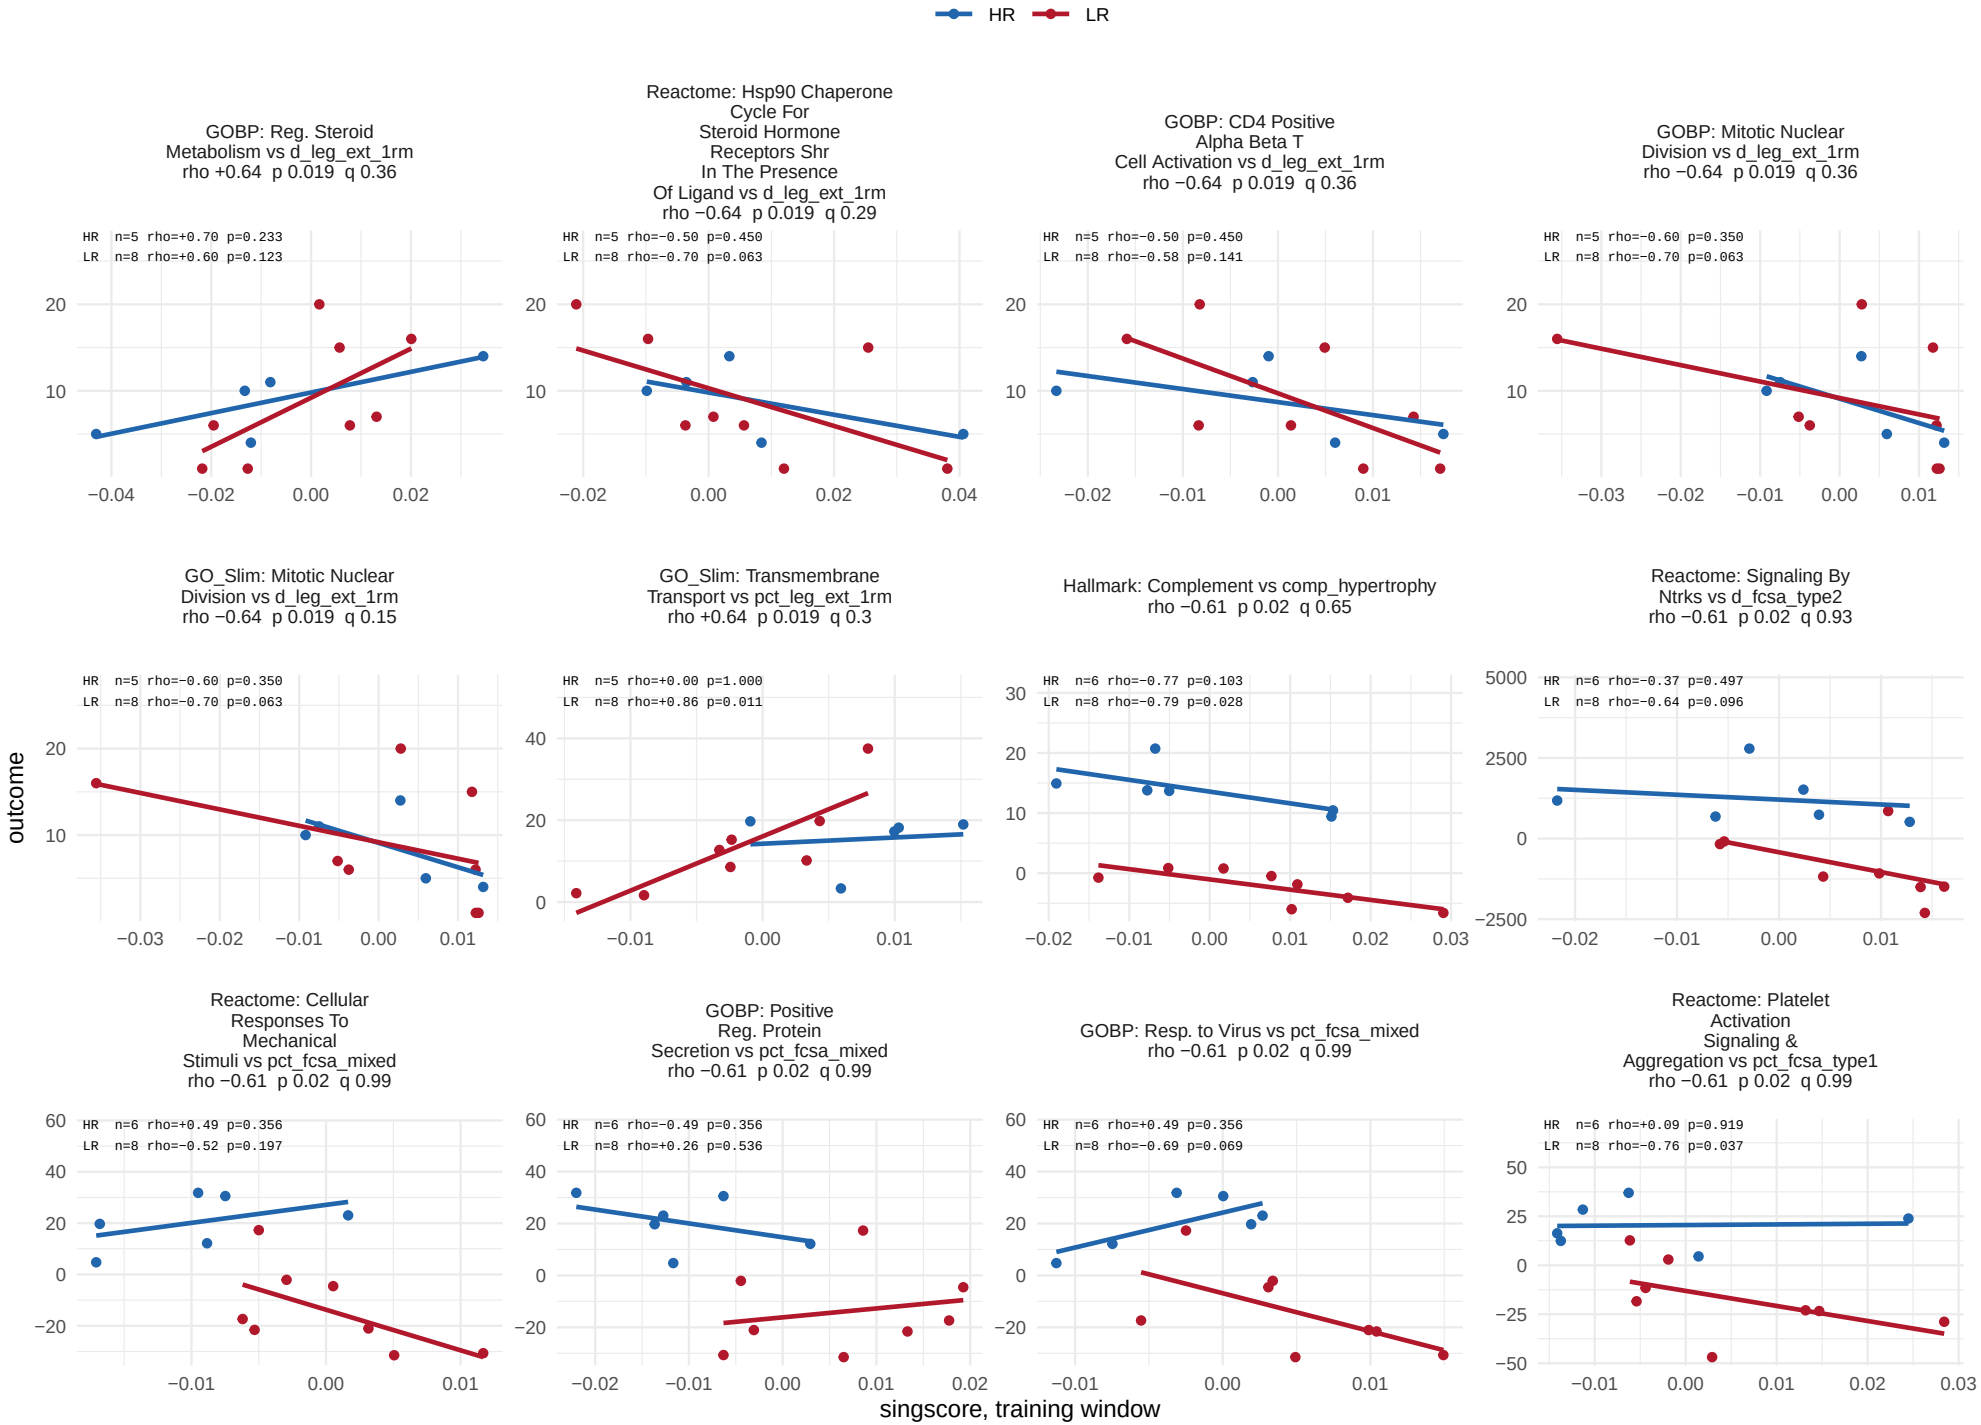

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


923 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

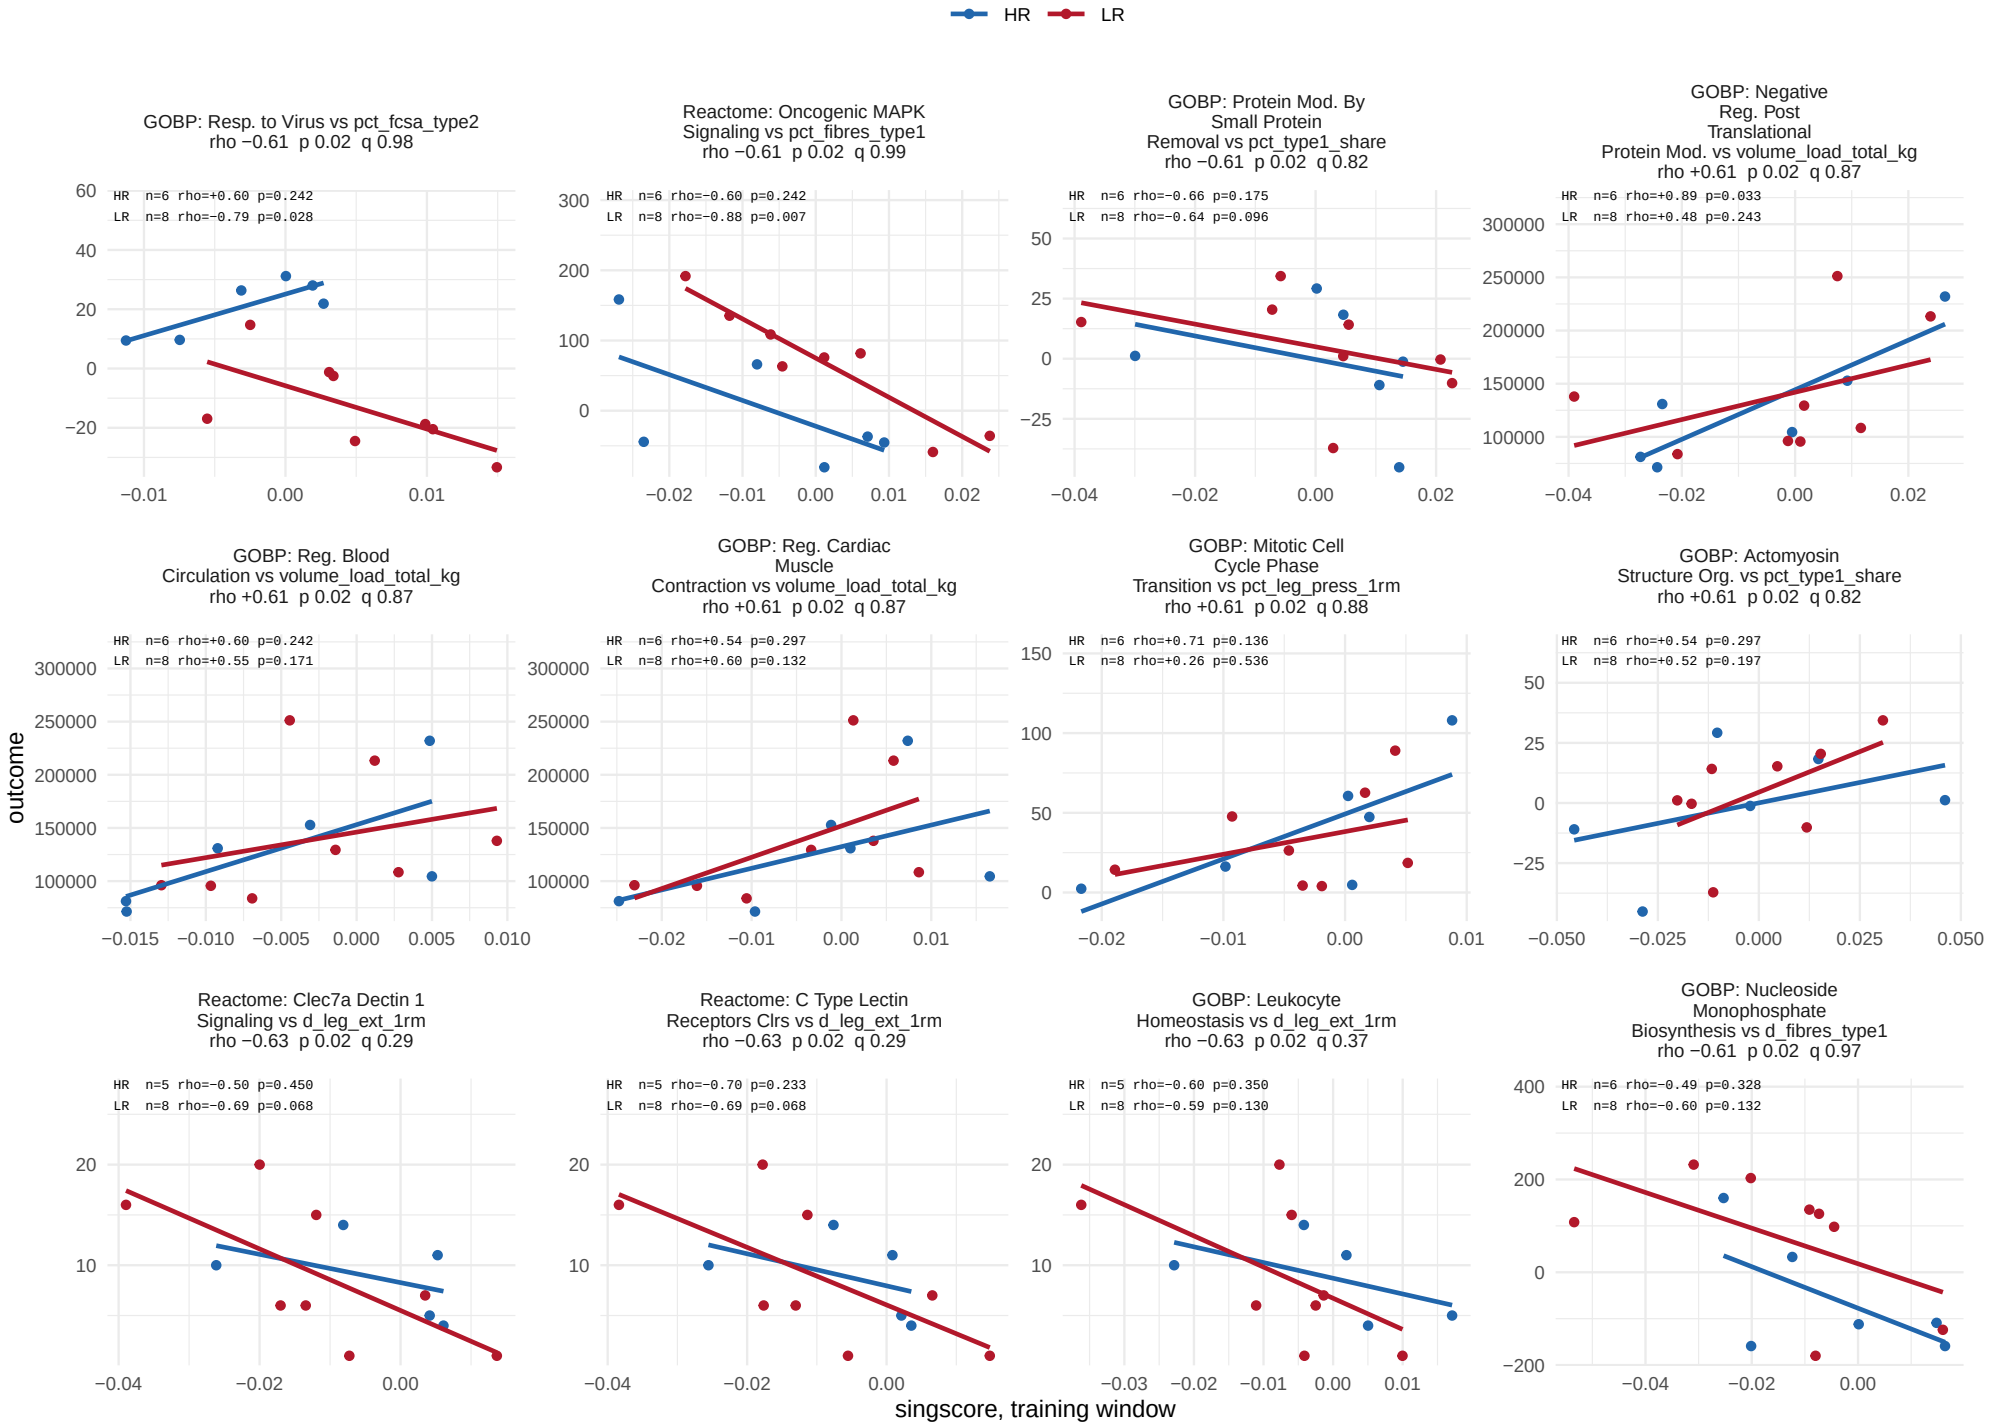

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


923 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

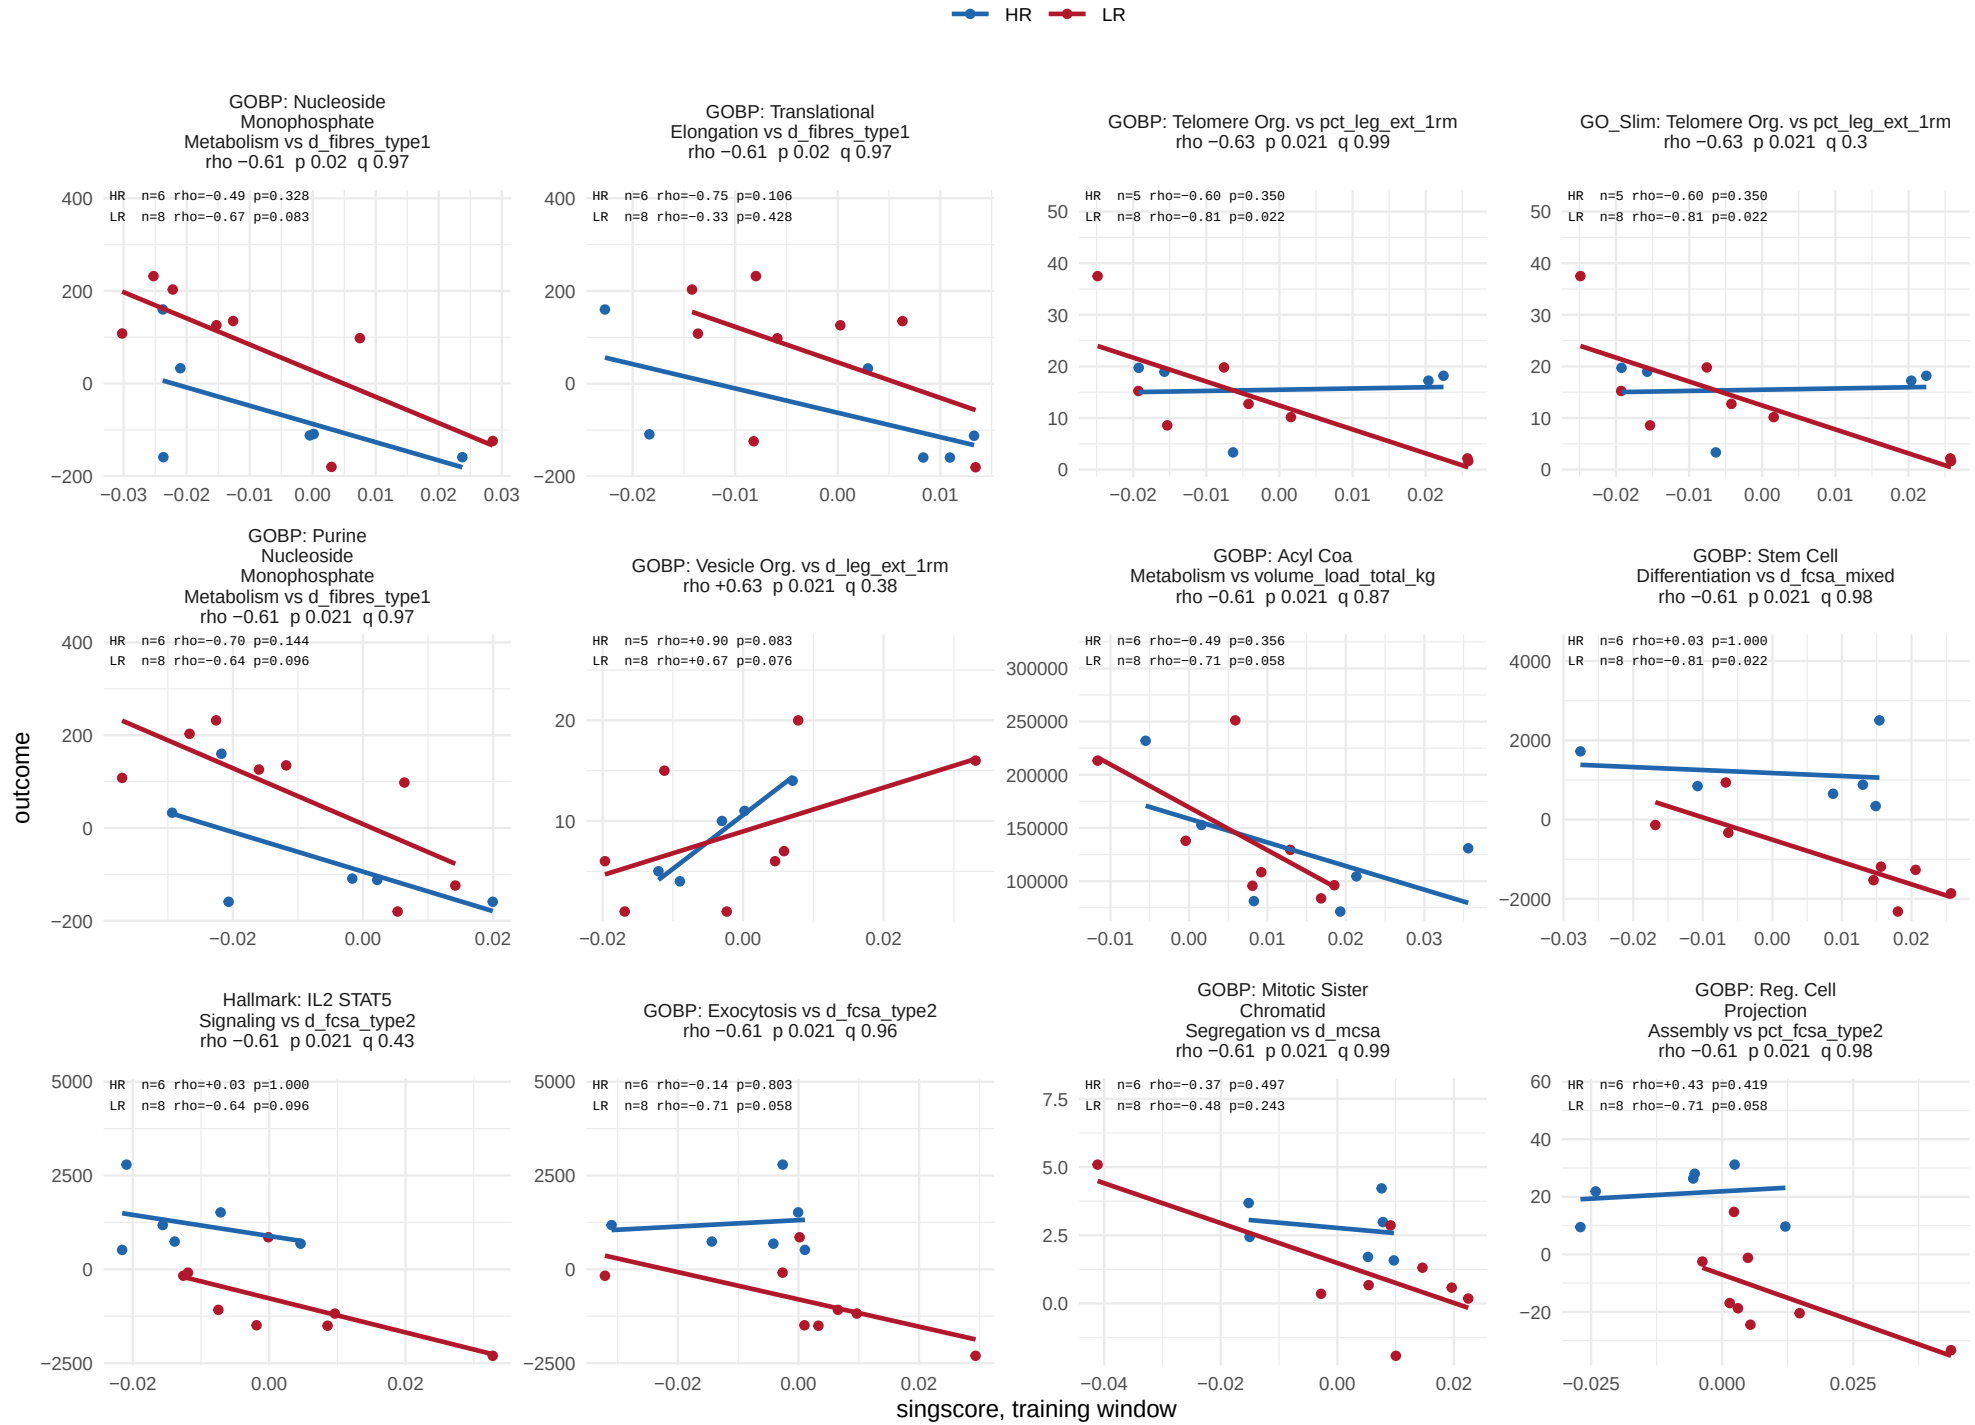

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


923 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

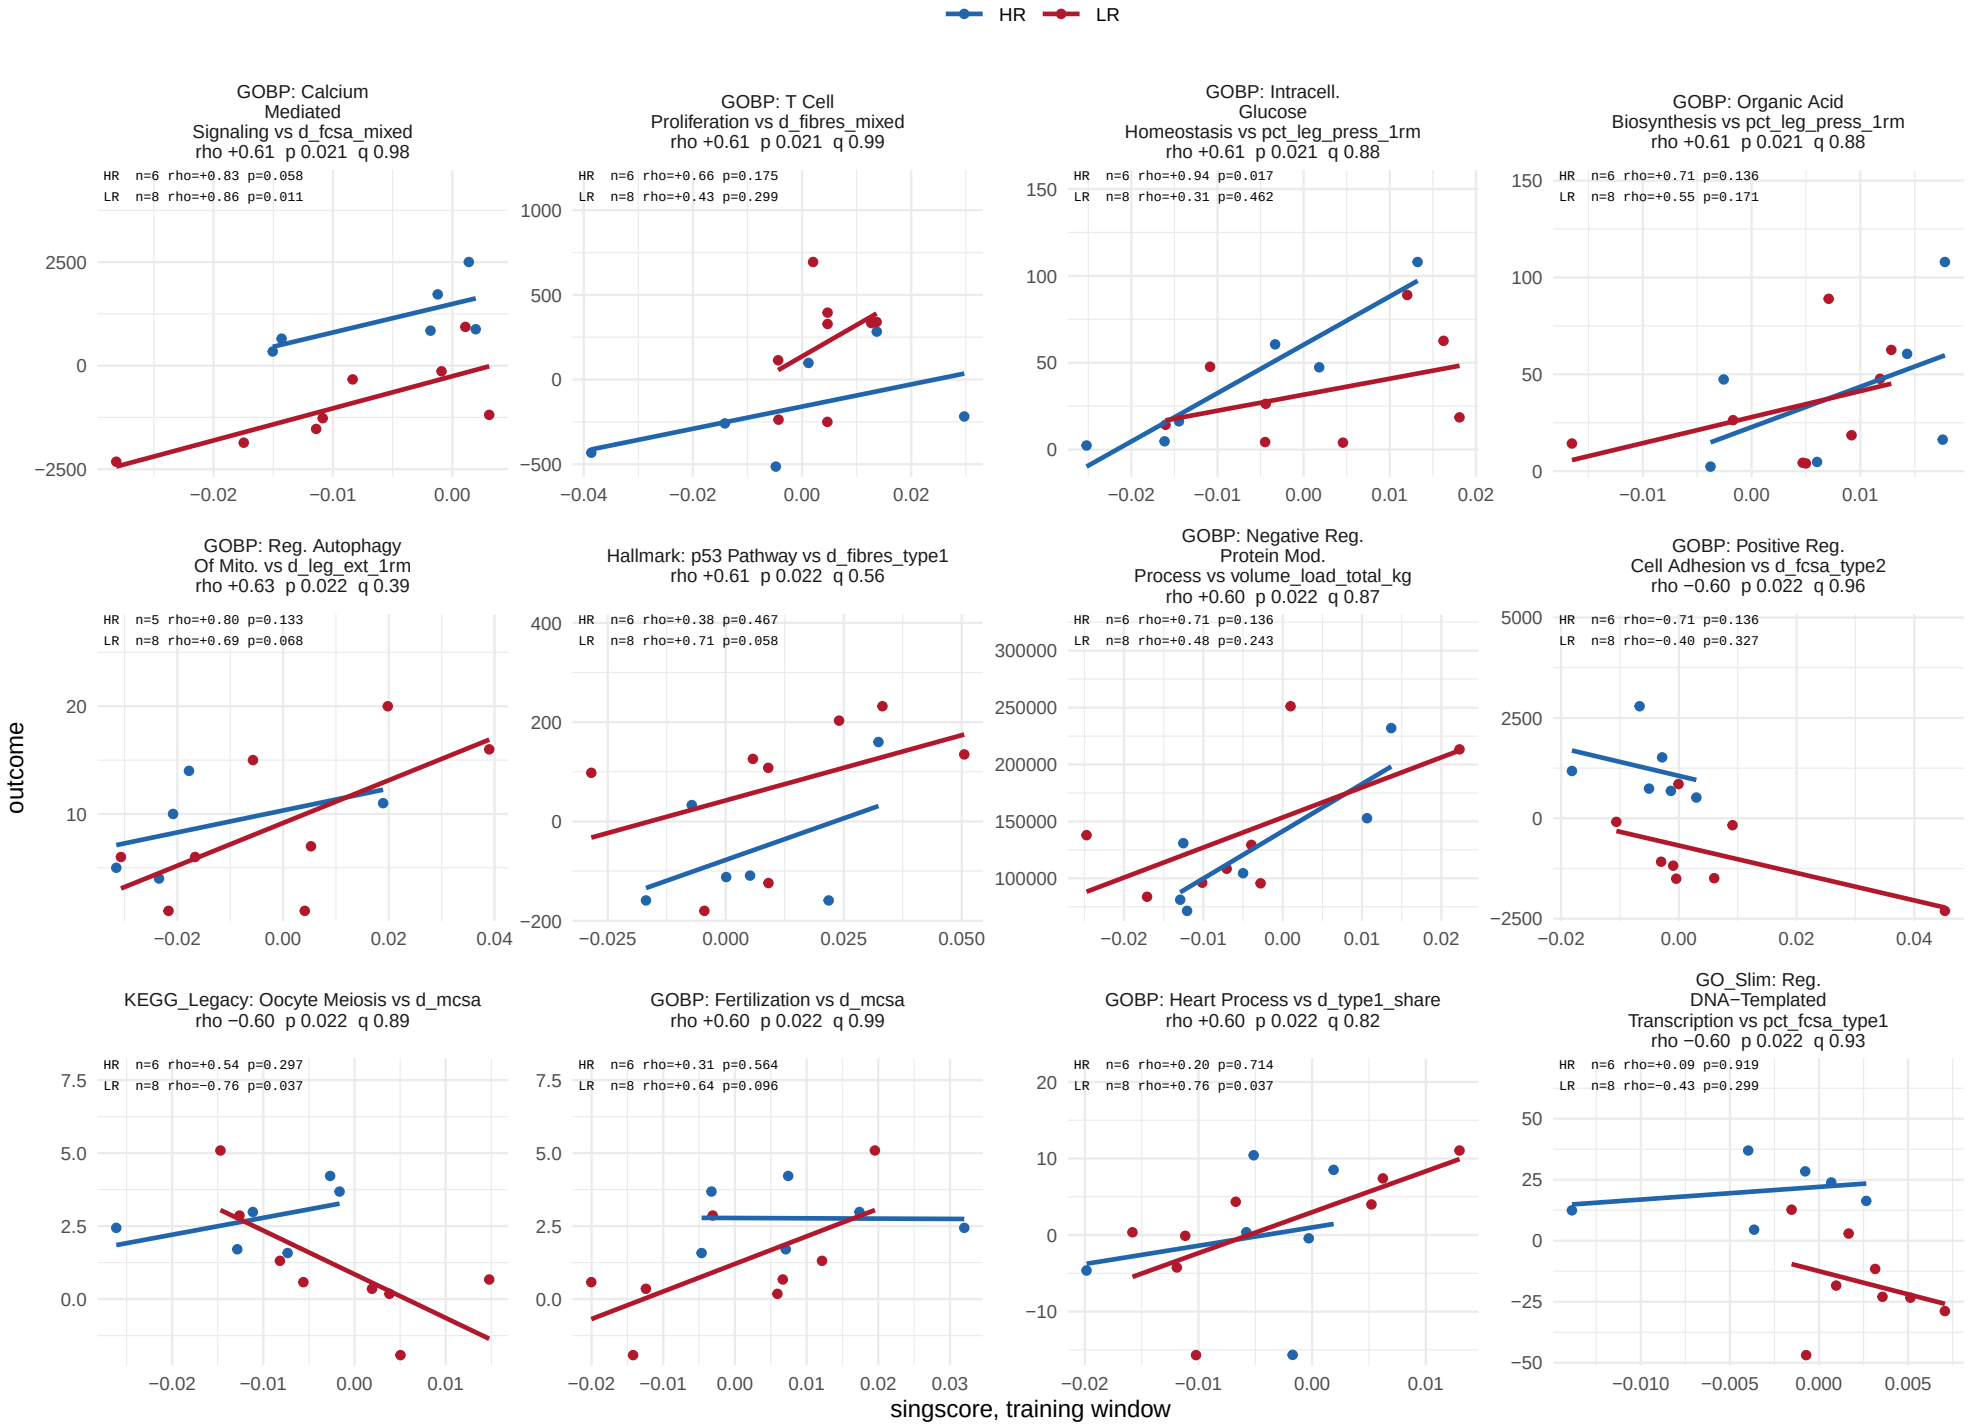

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


923 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

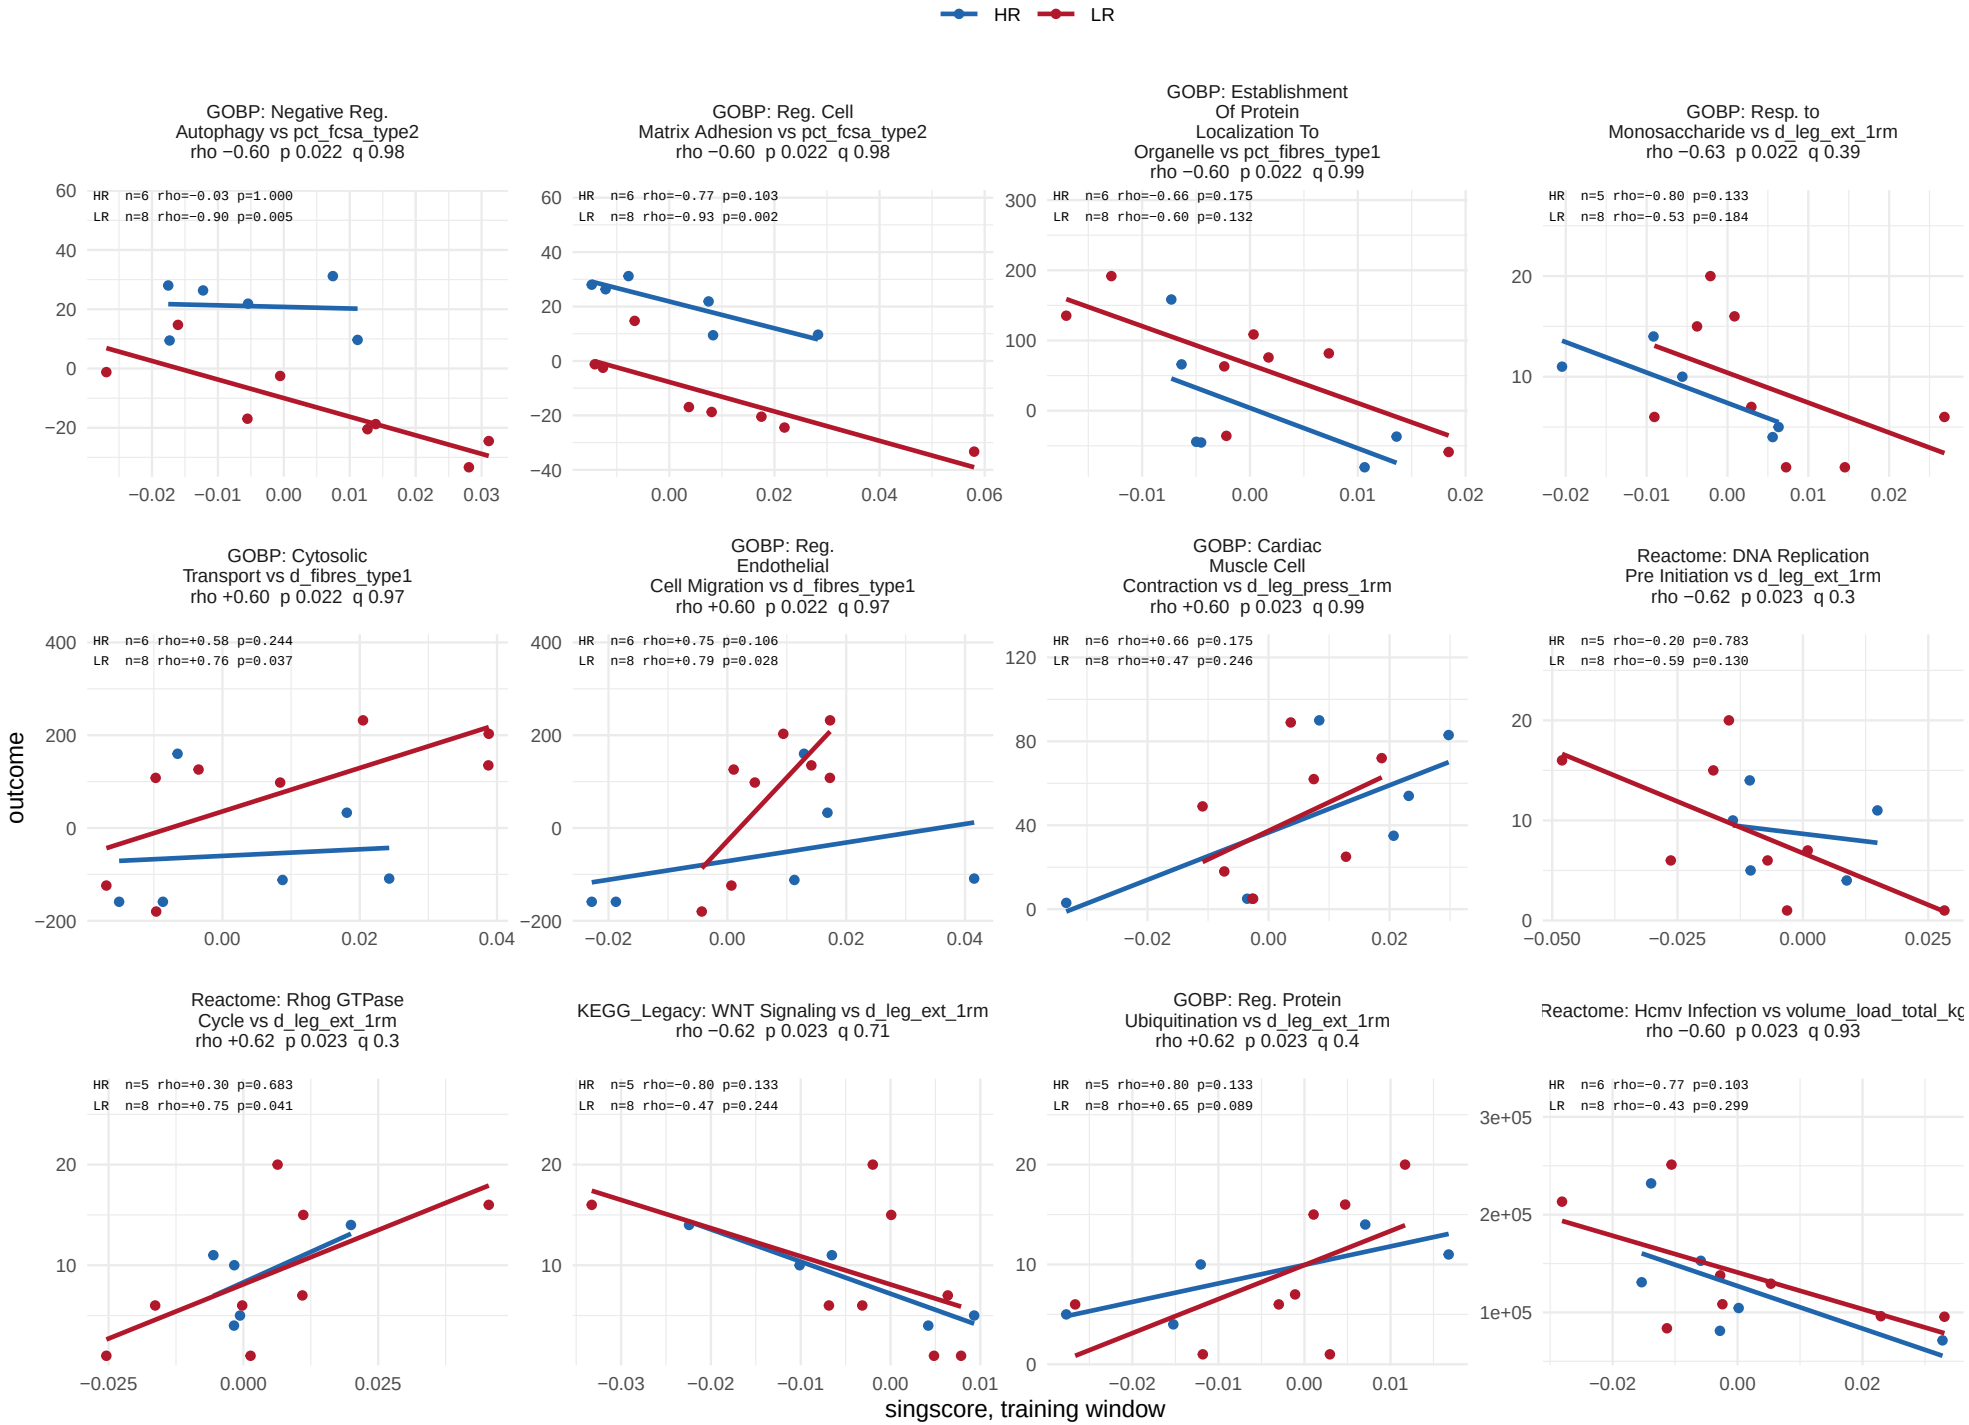

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


923 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

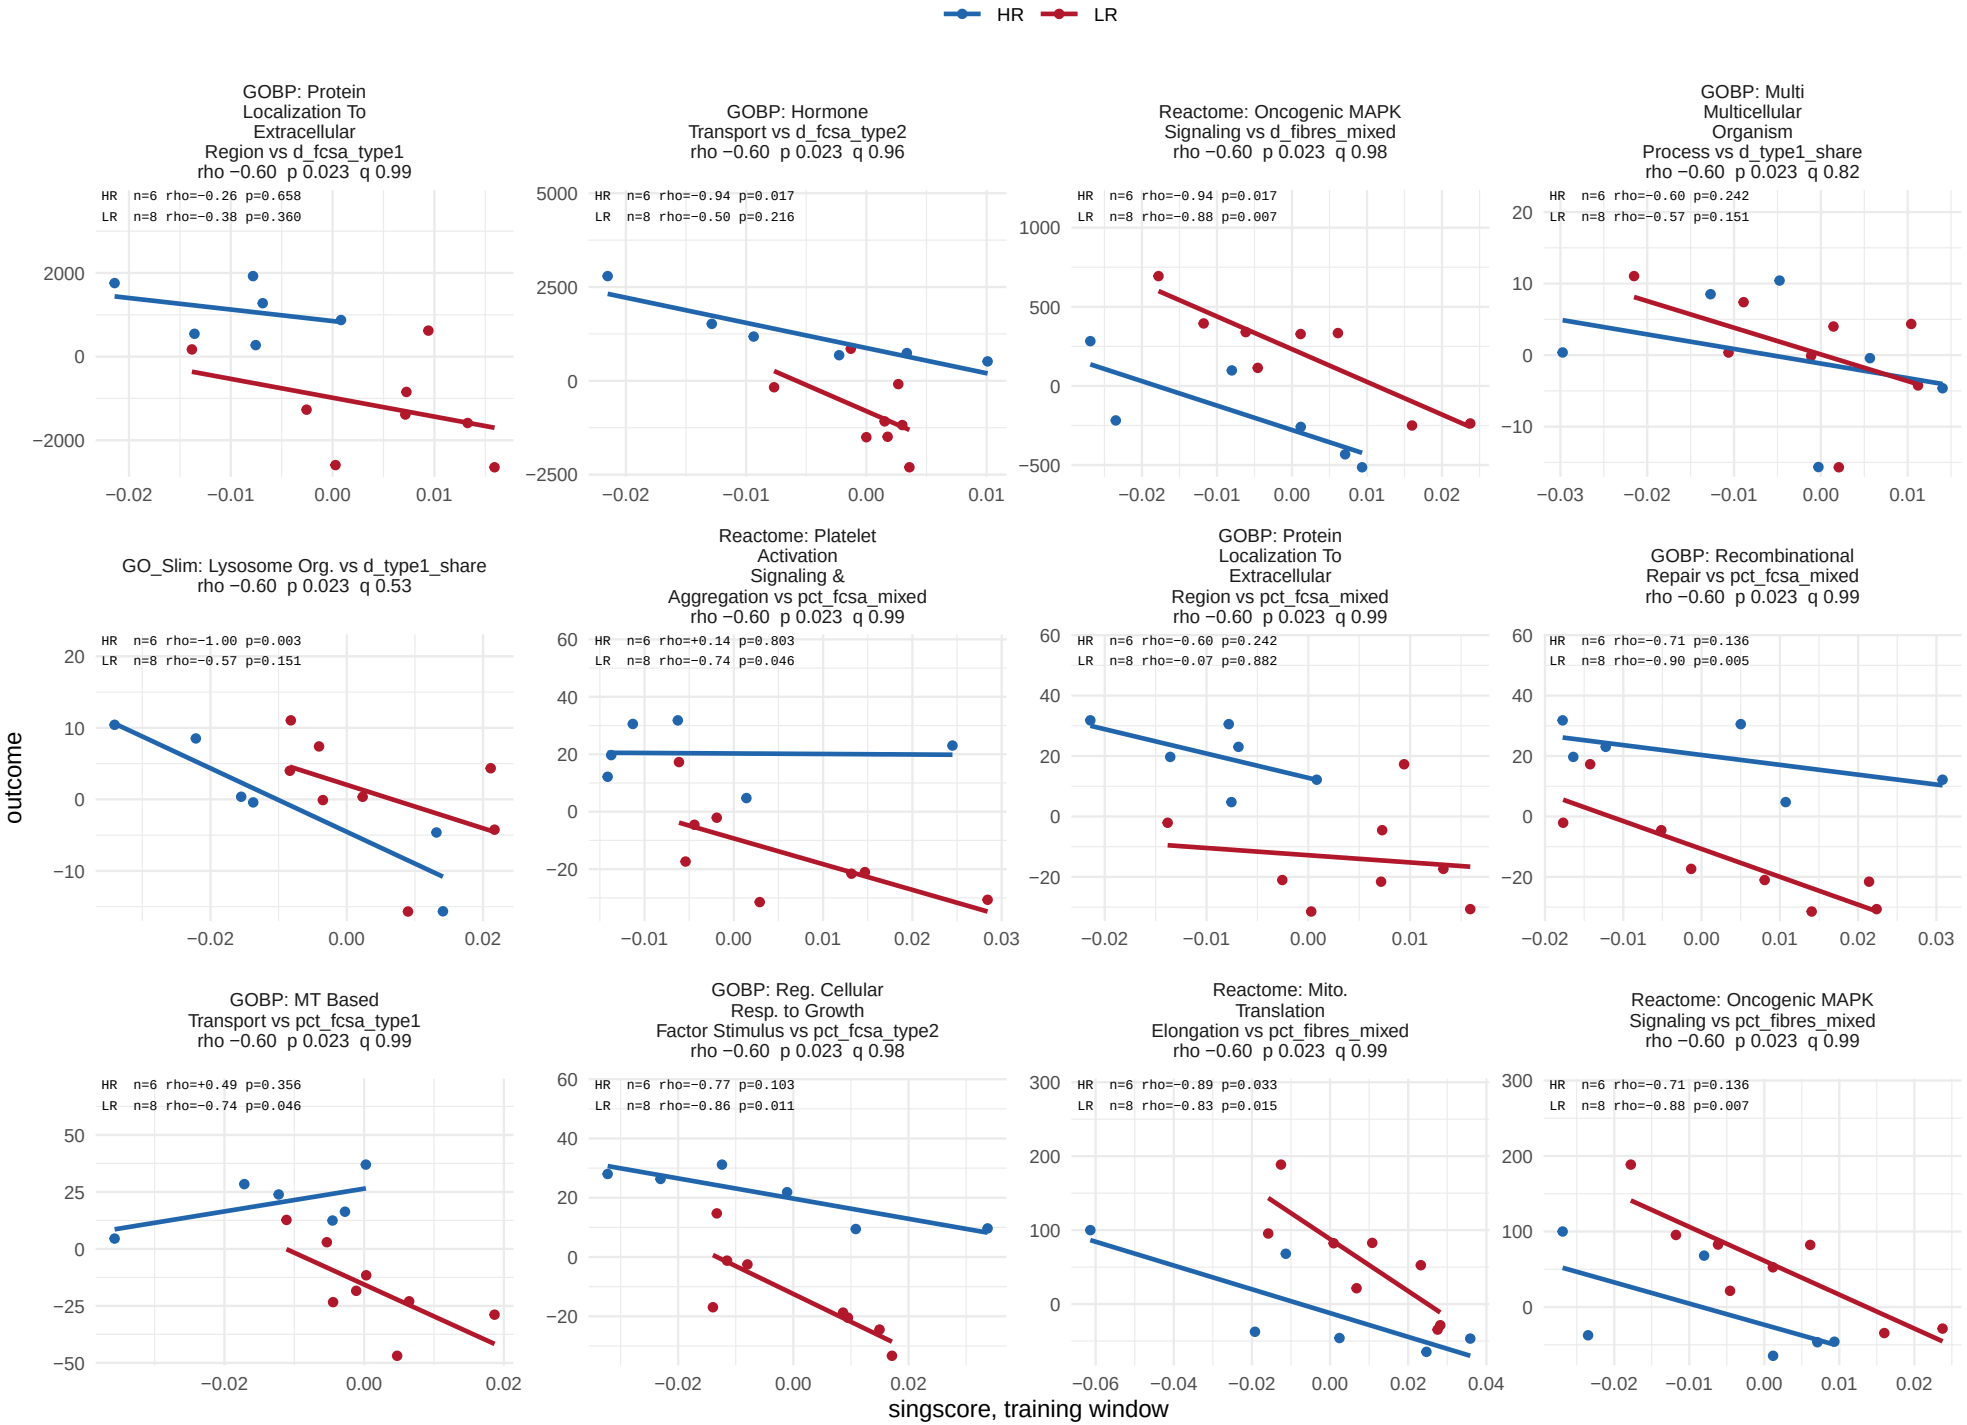

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


923 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

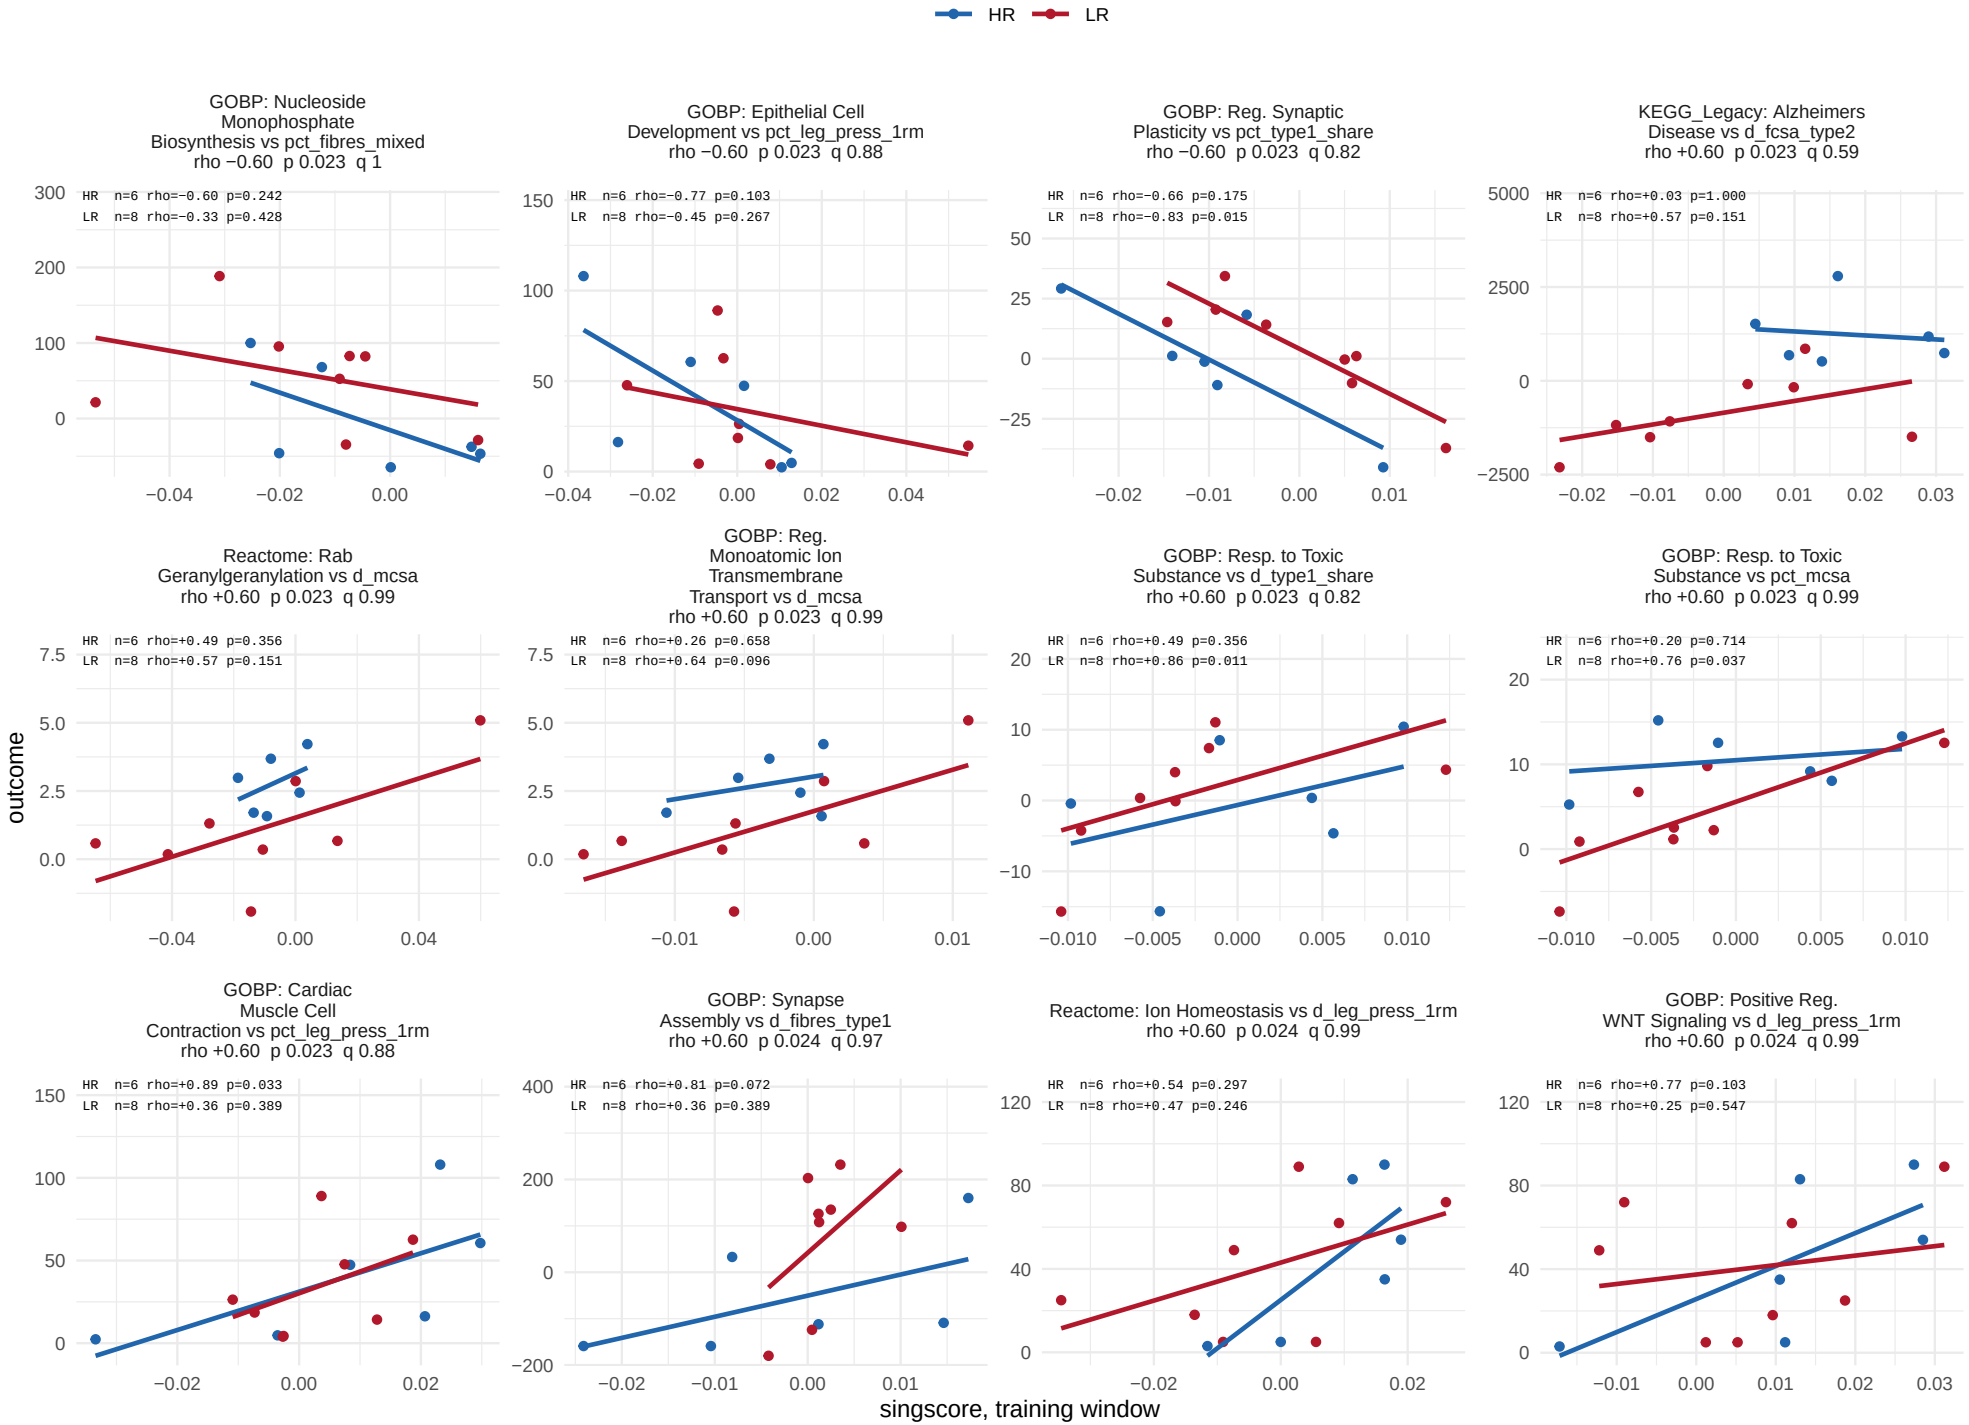

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


923 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

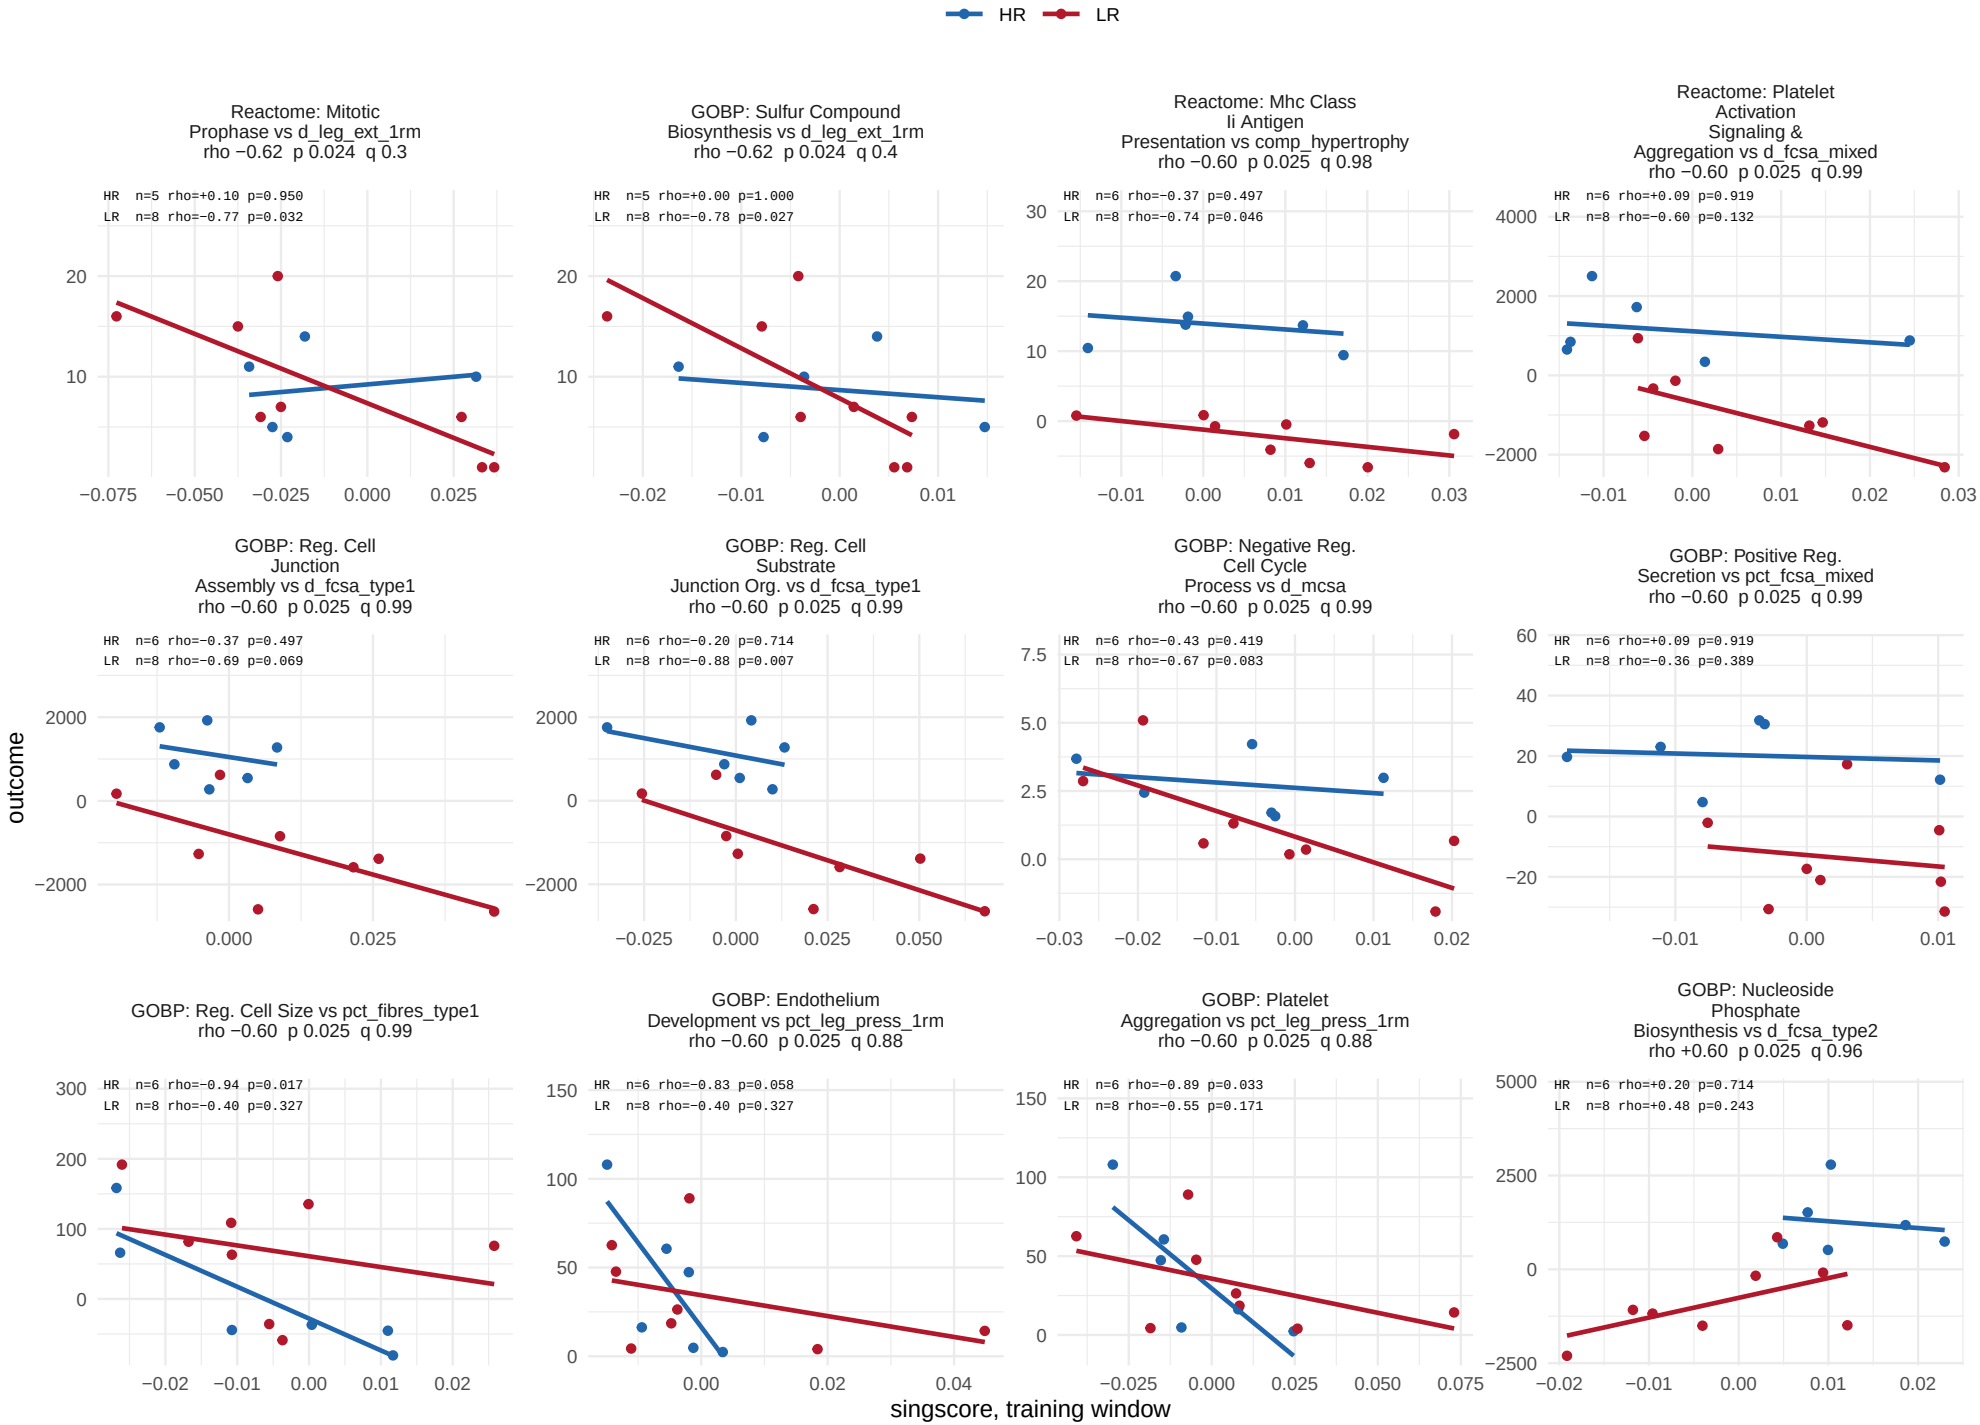

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


923 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

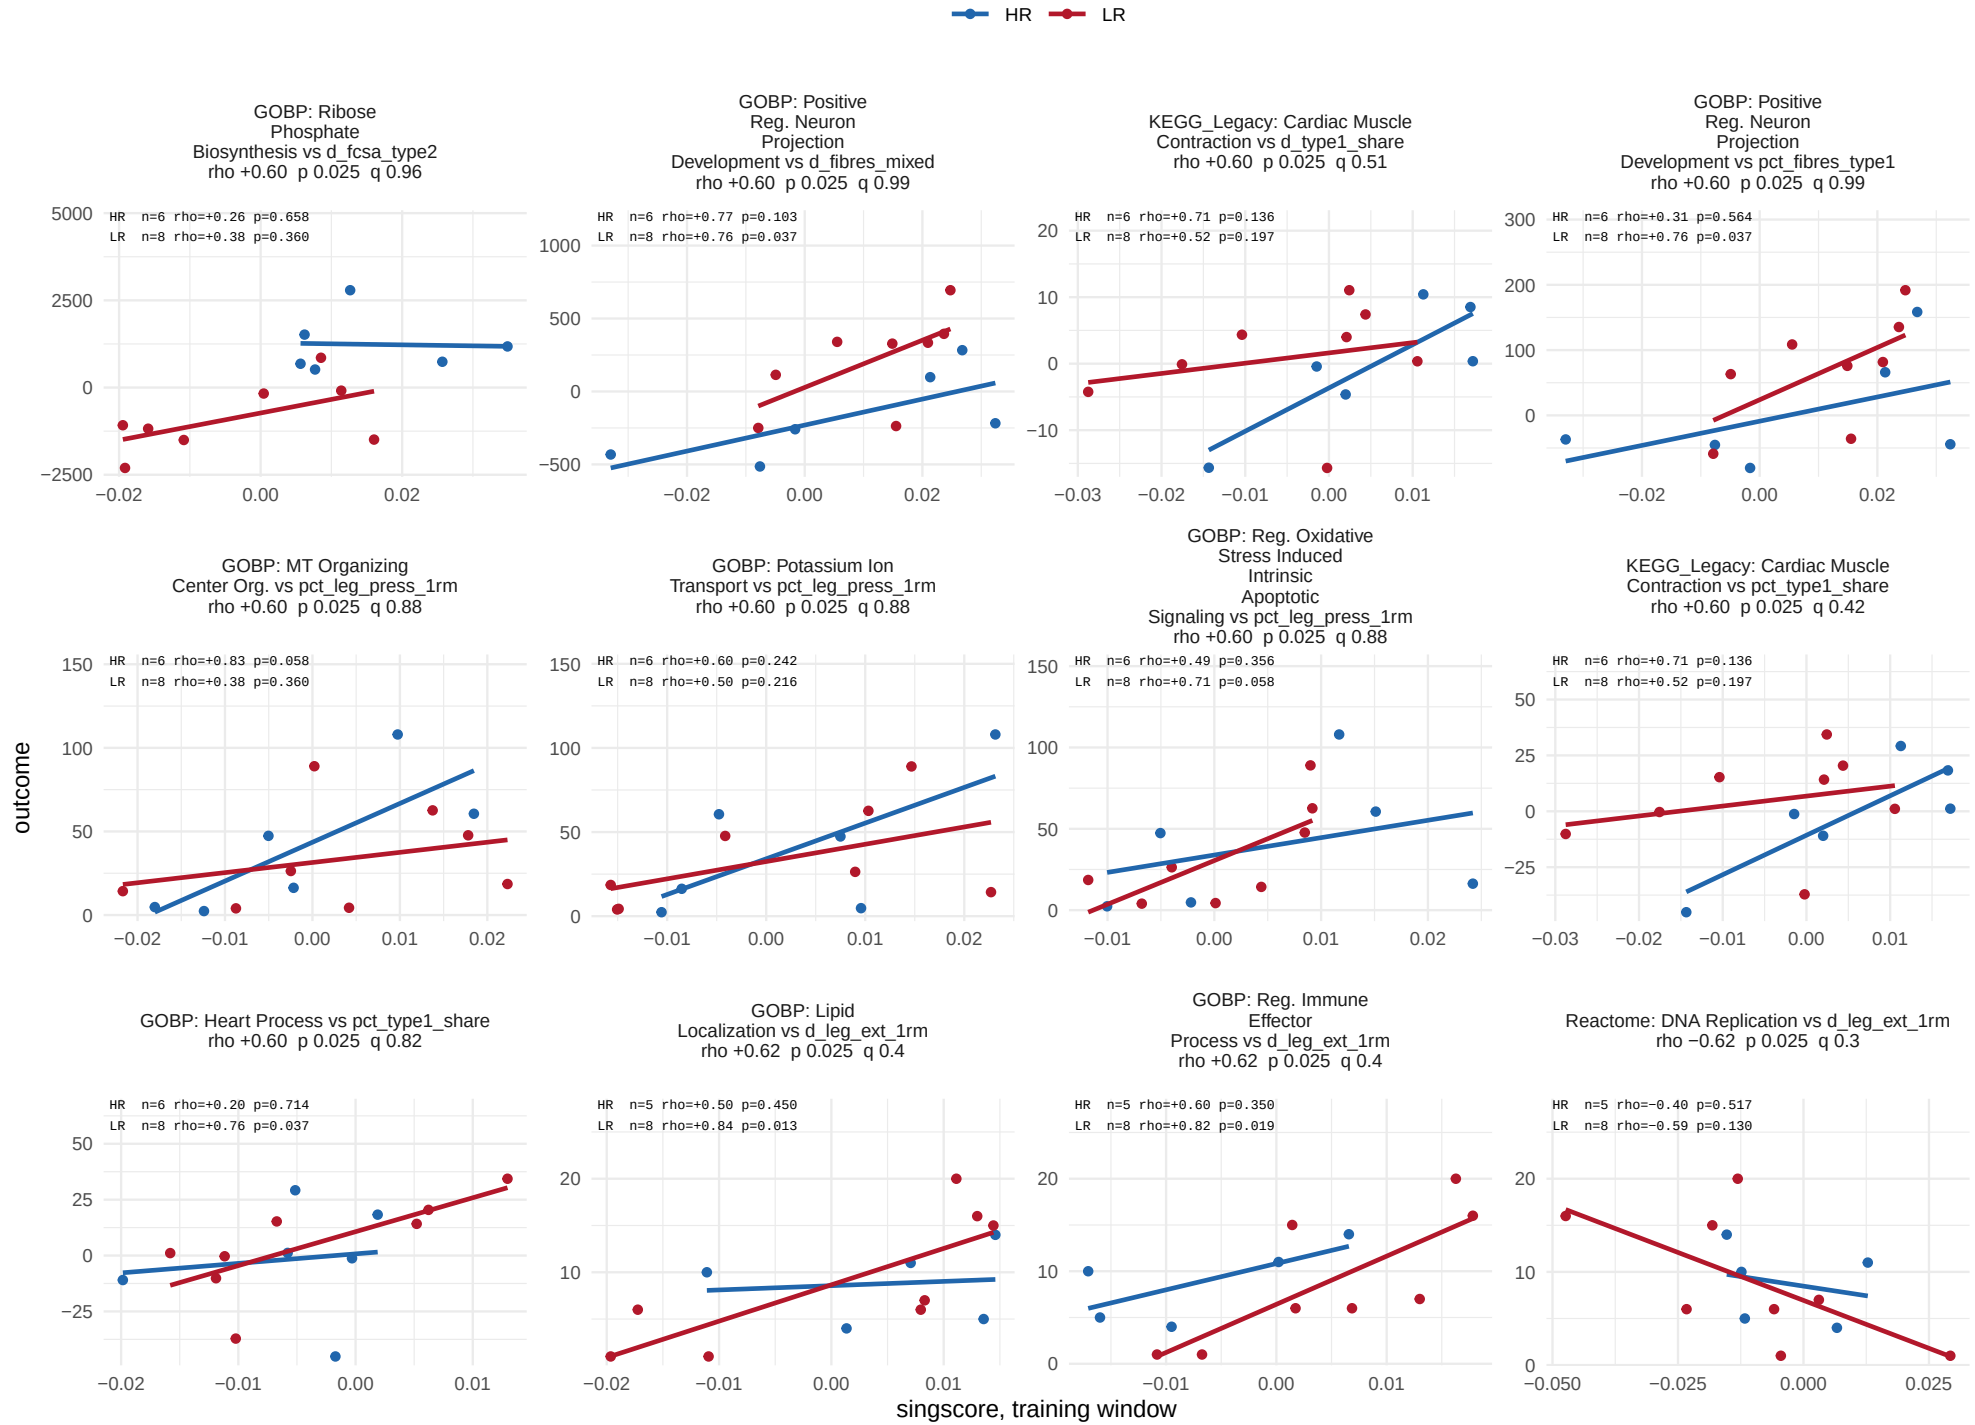

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


923 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

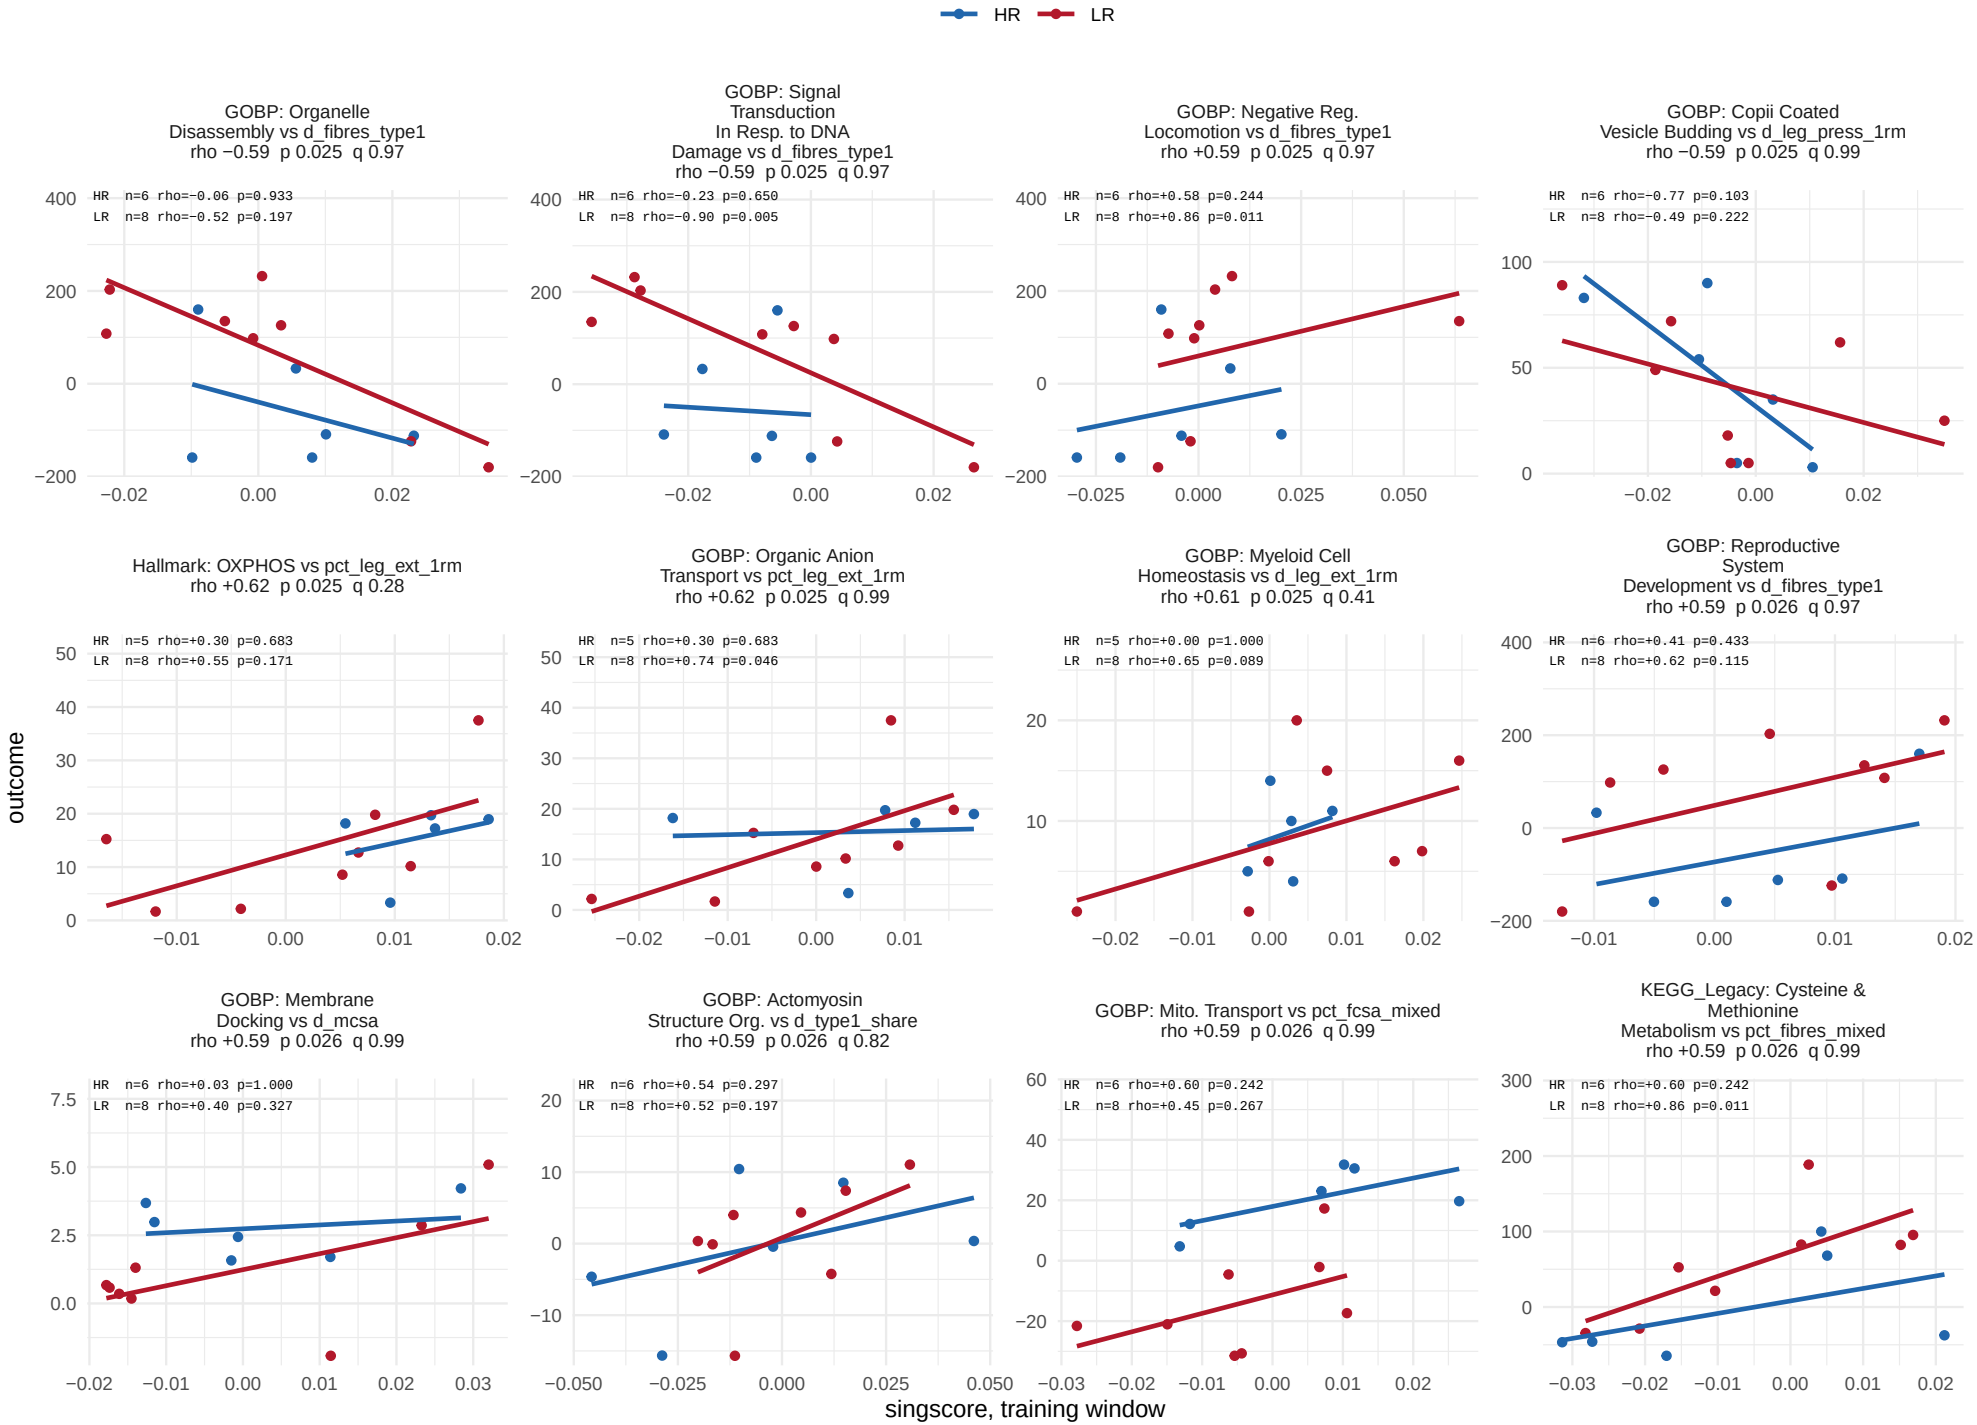

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


923 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

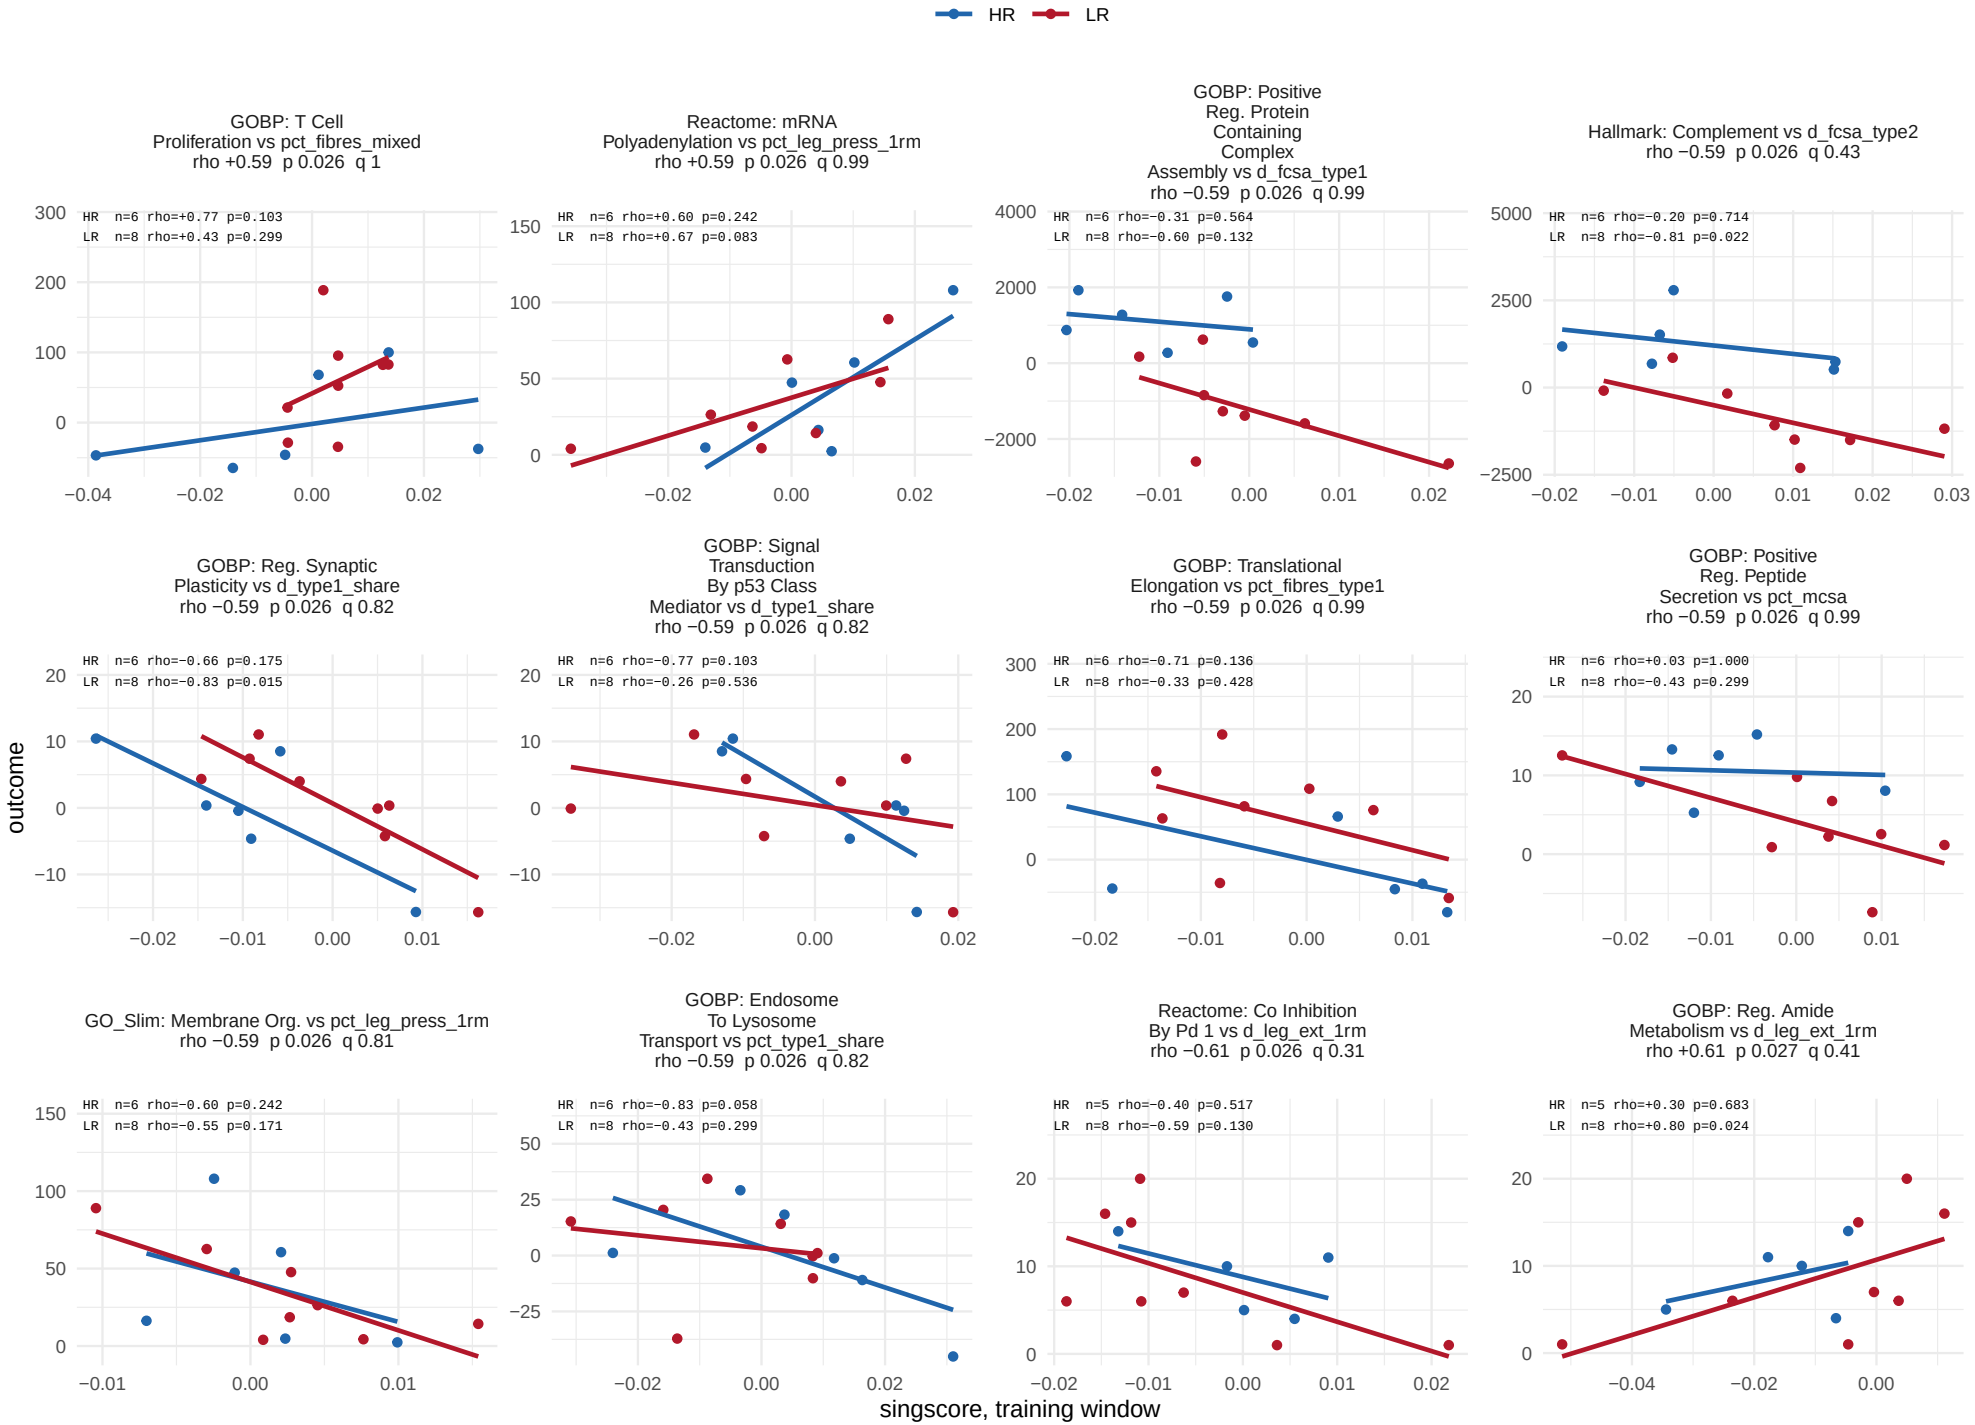

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


923 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

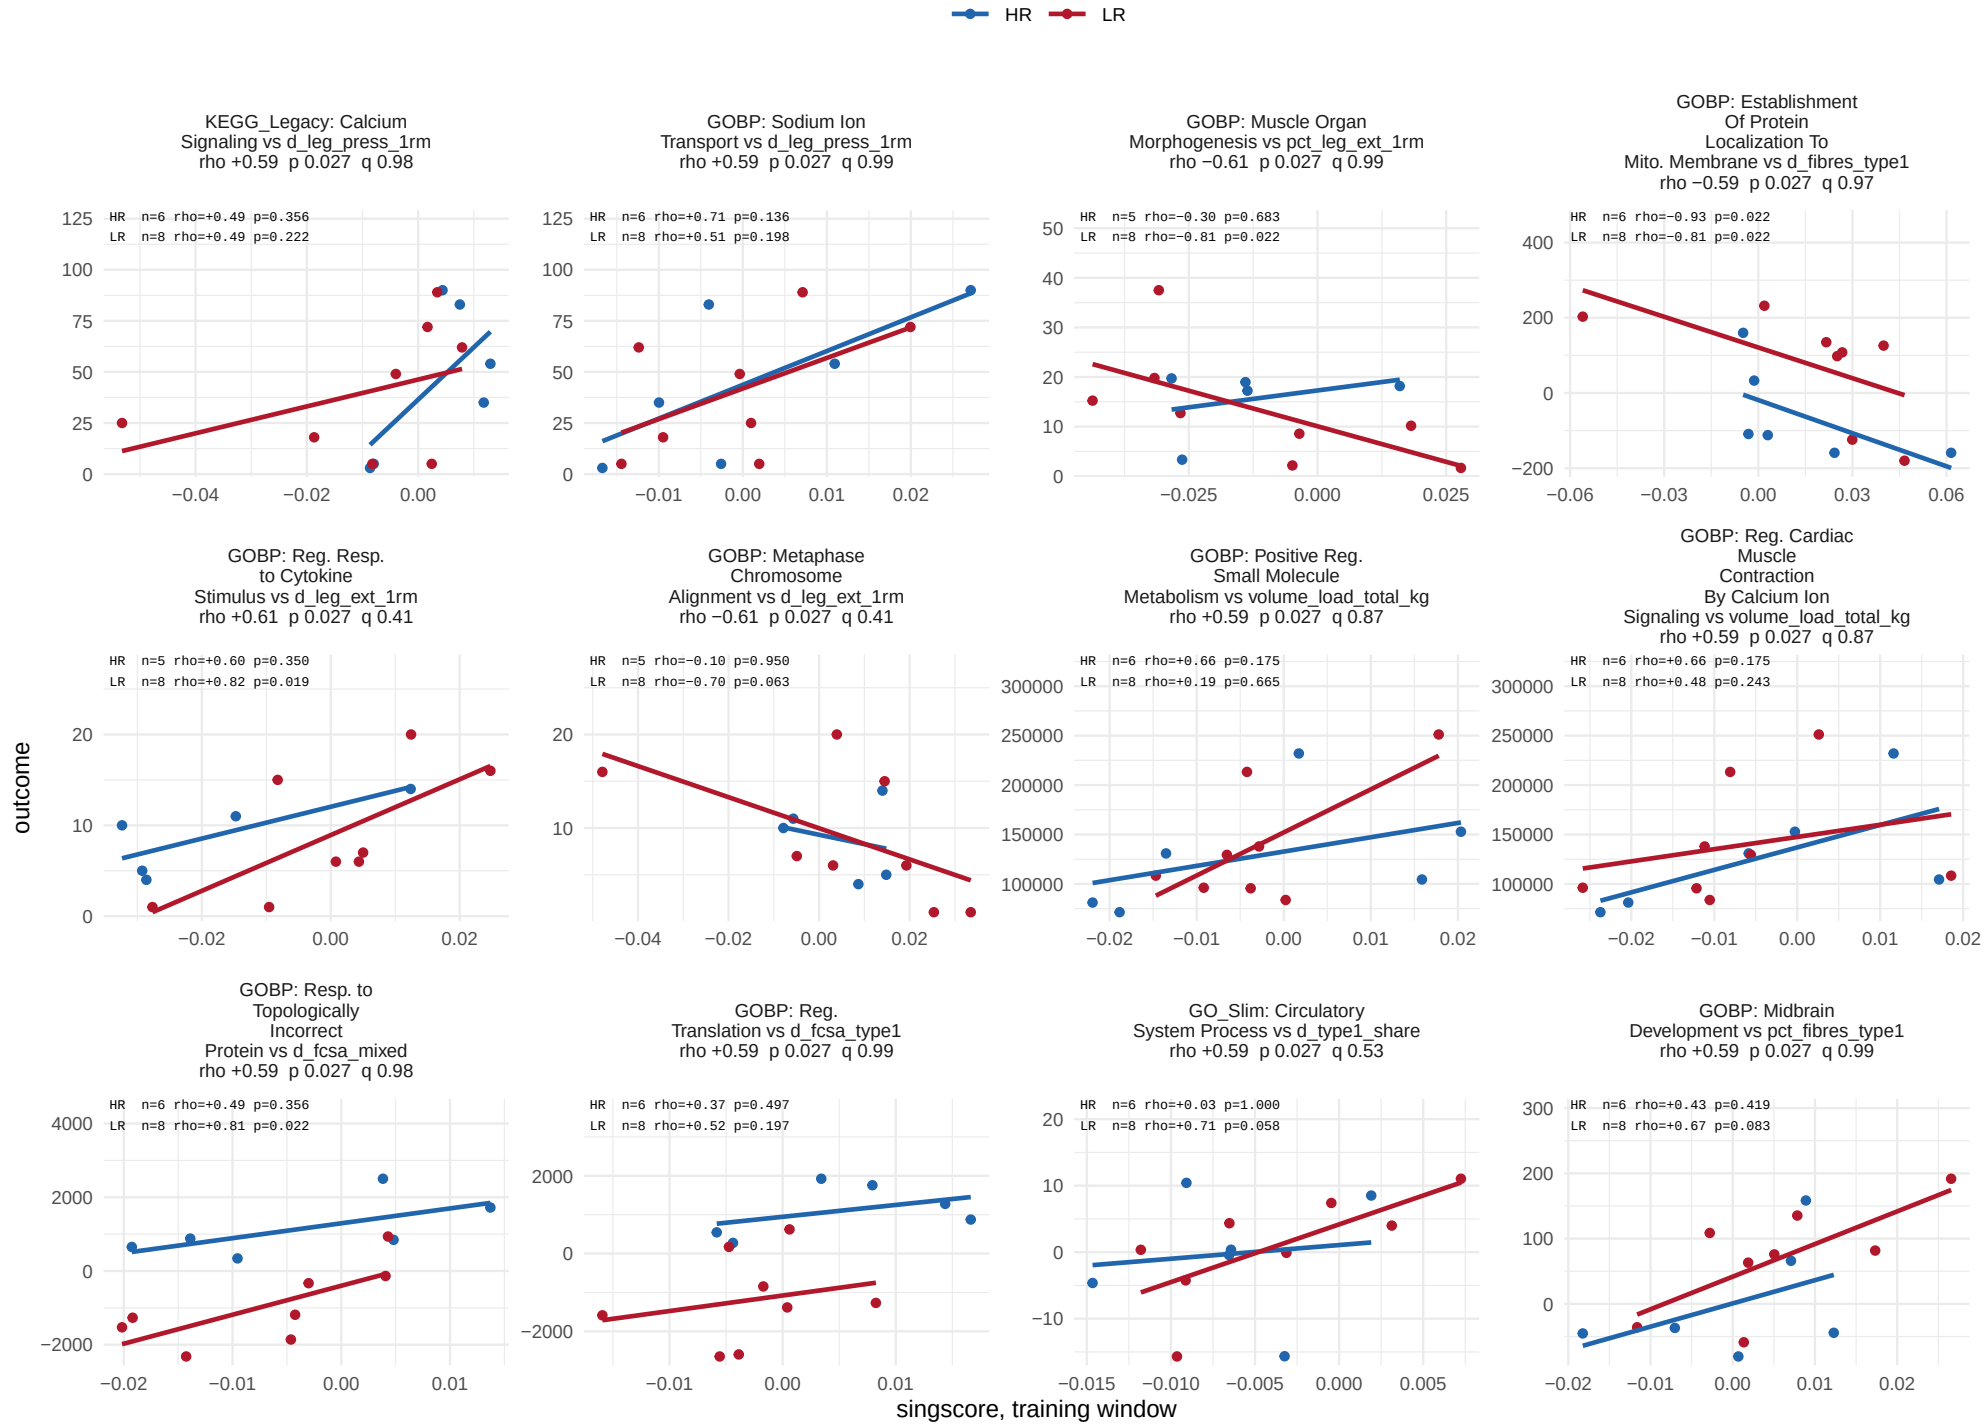

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


923 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

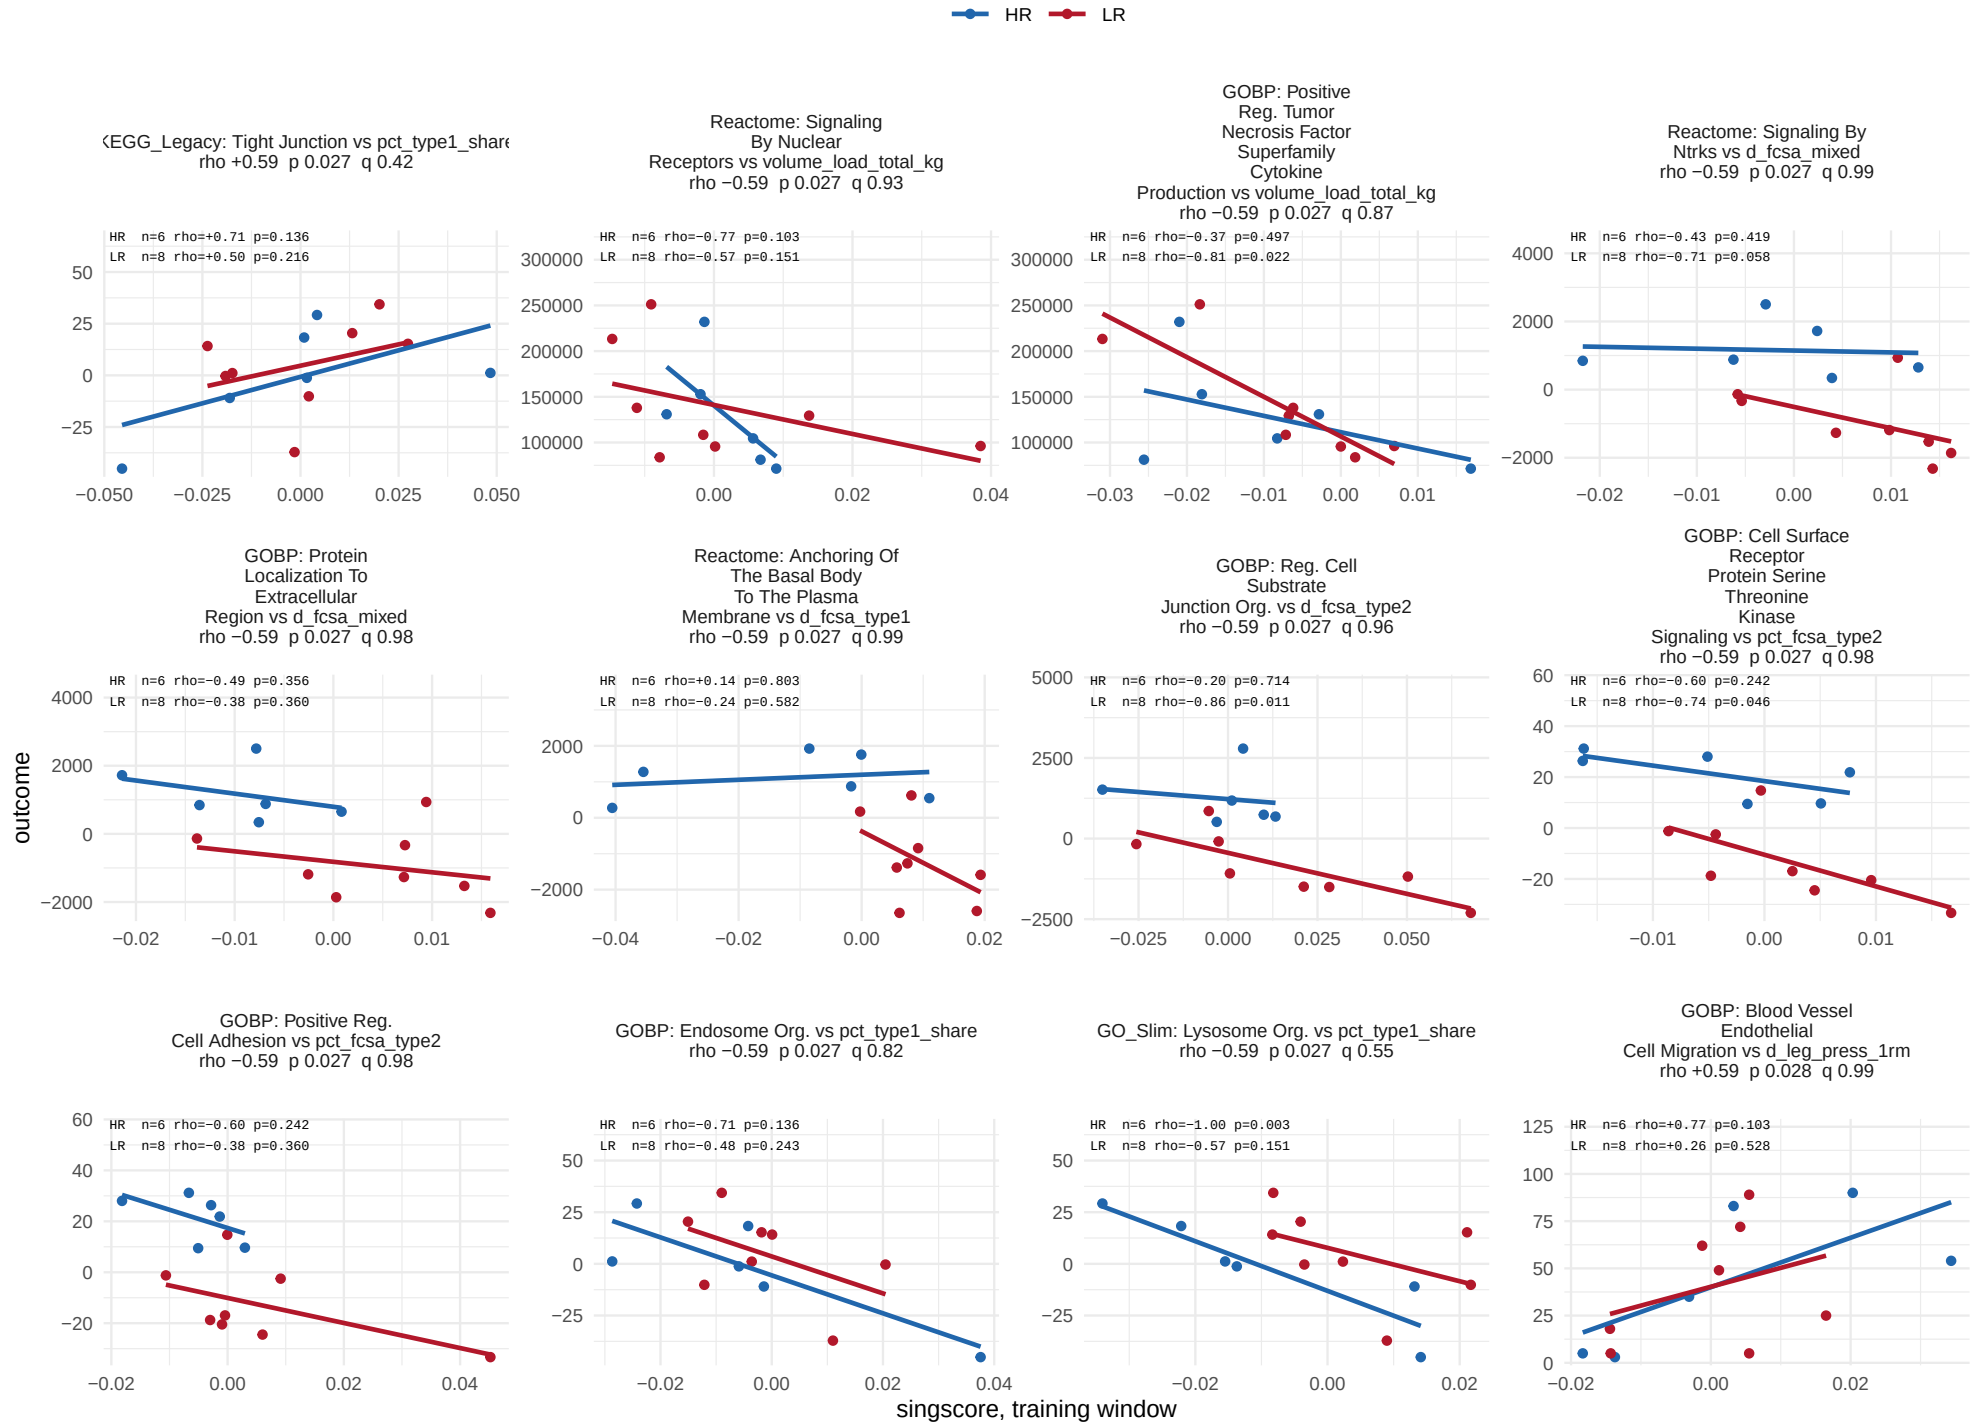

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


923 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

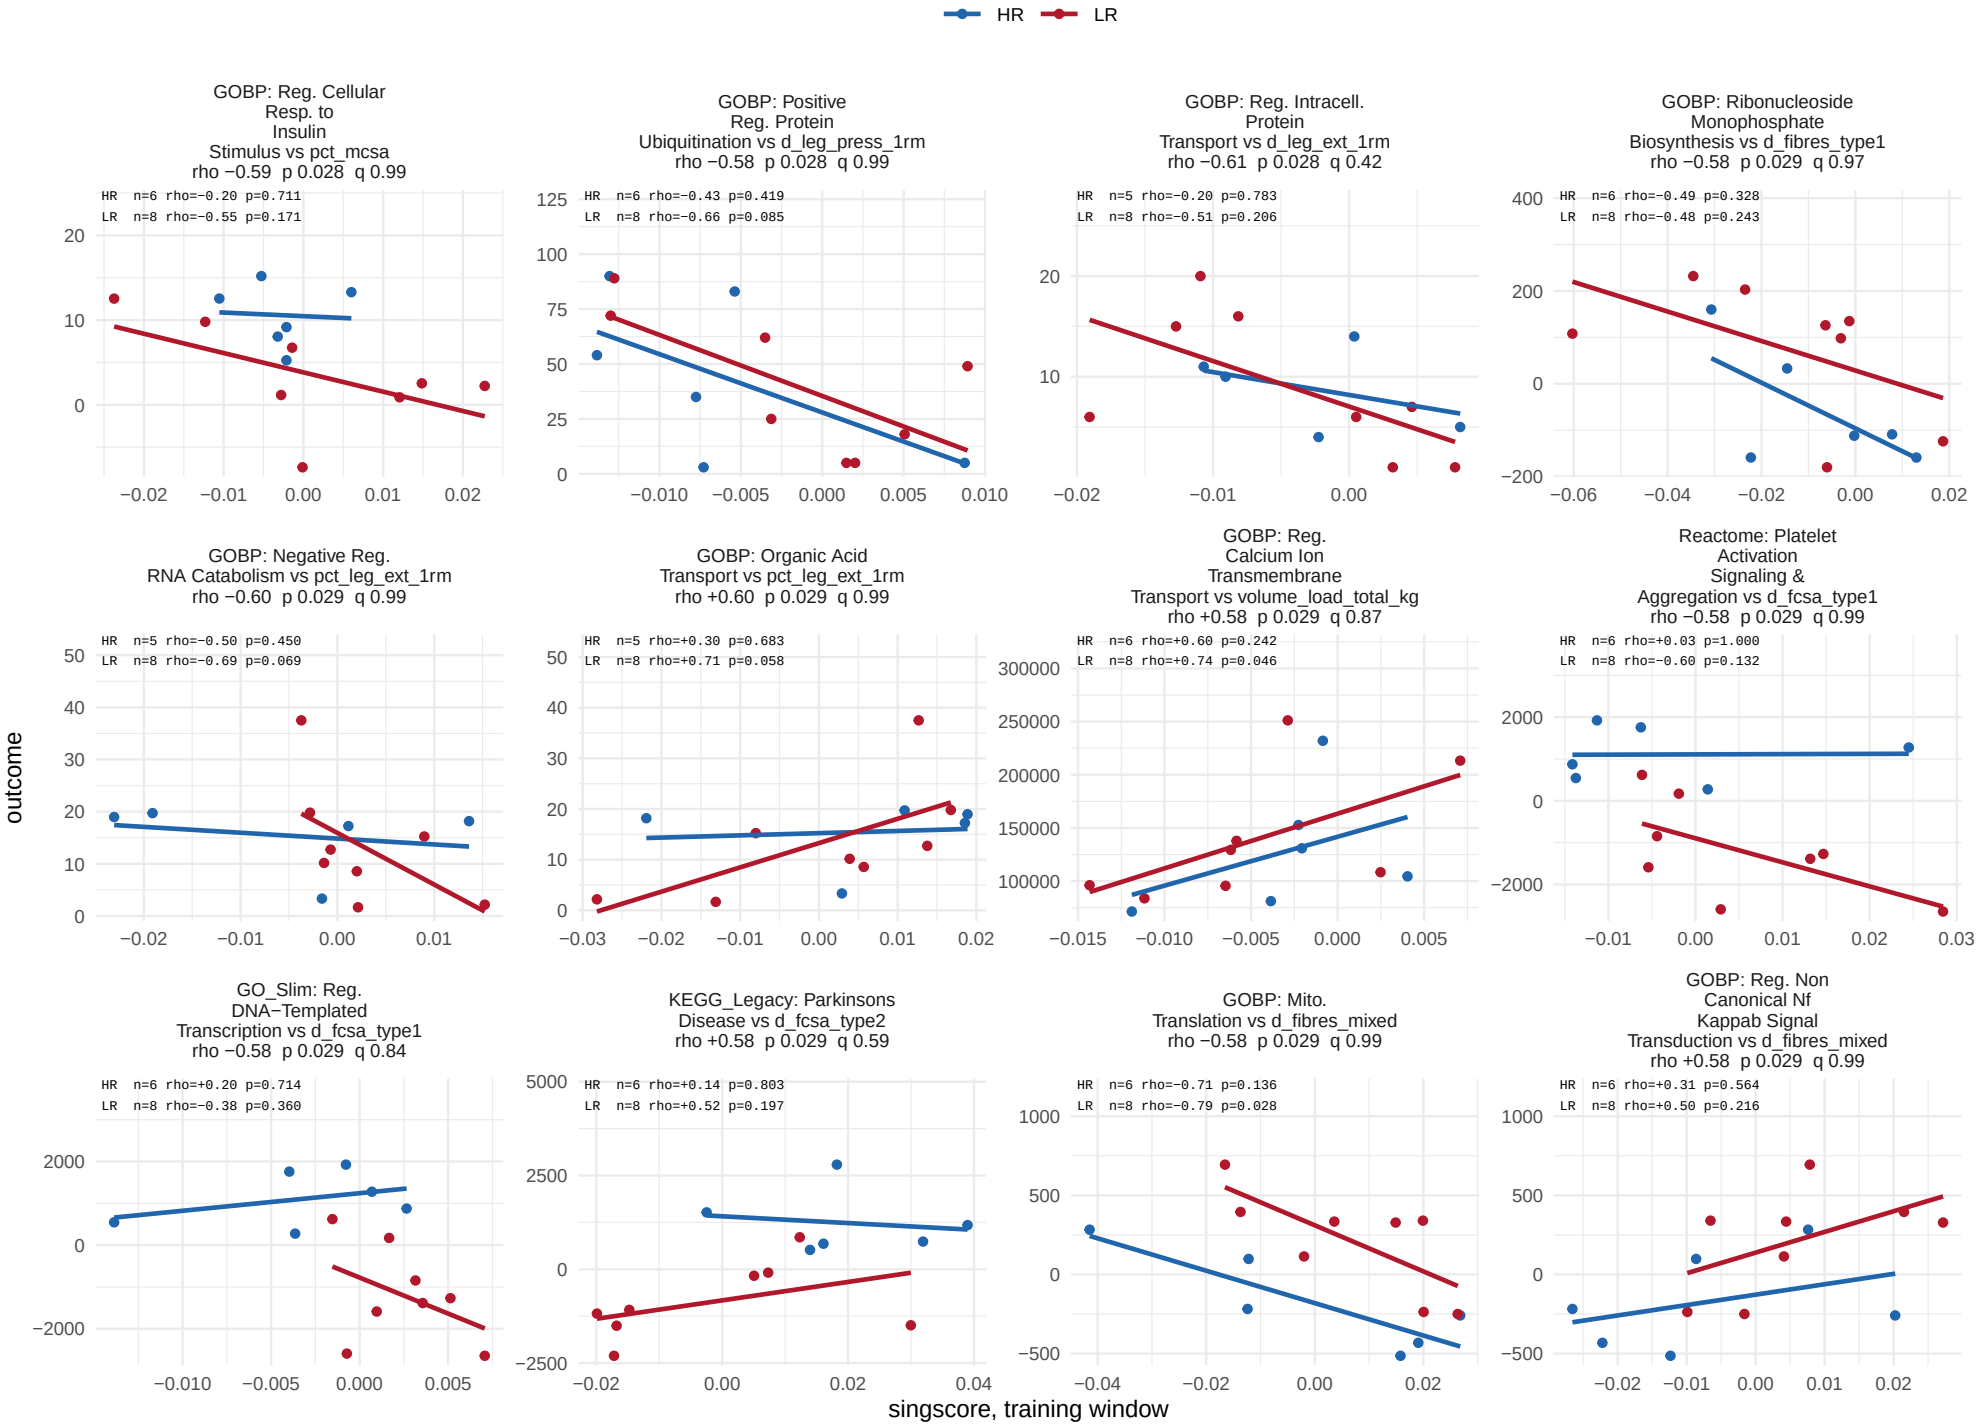

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


923 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

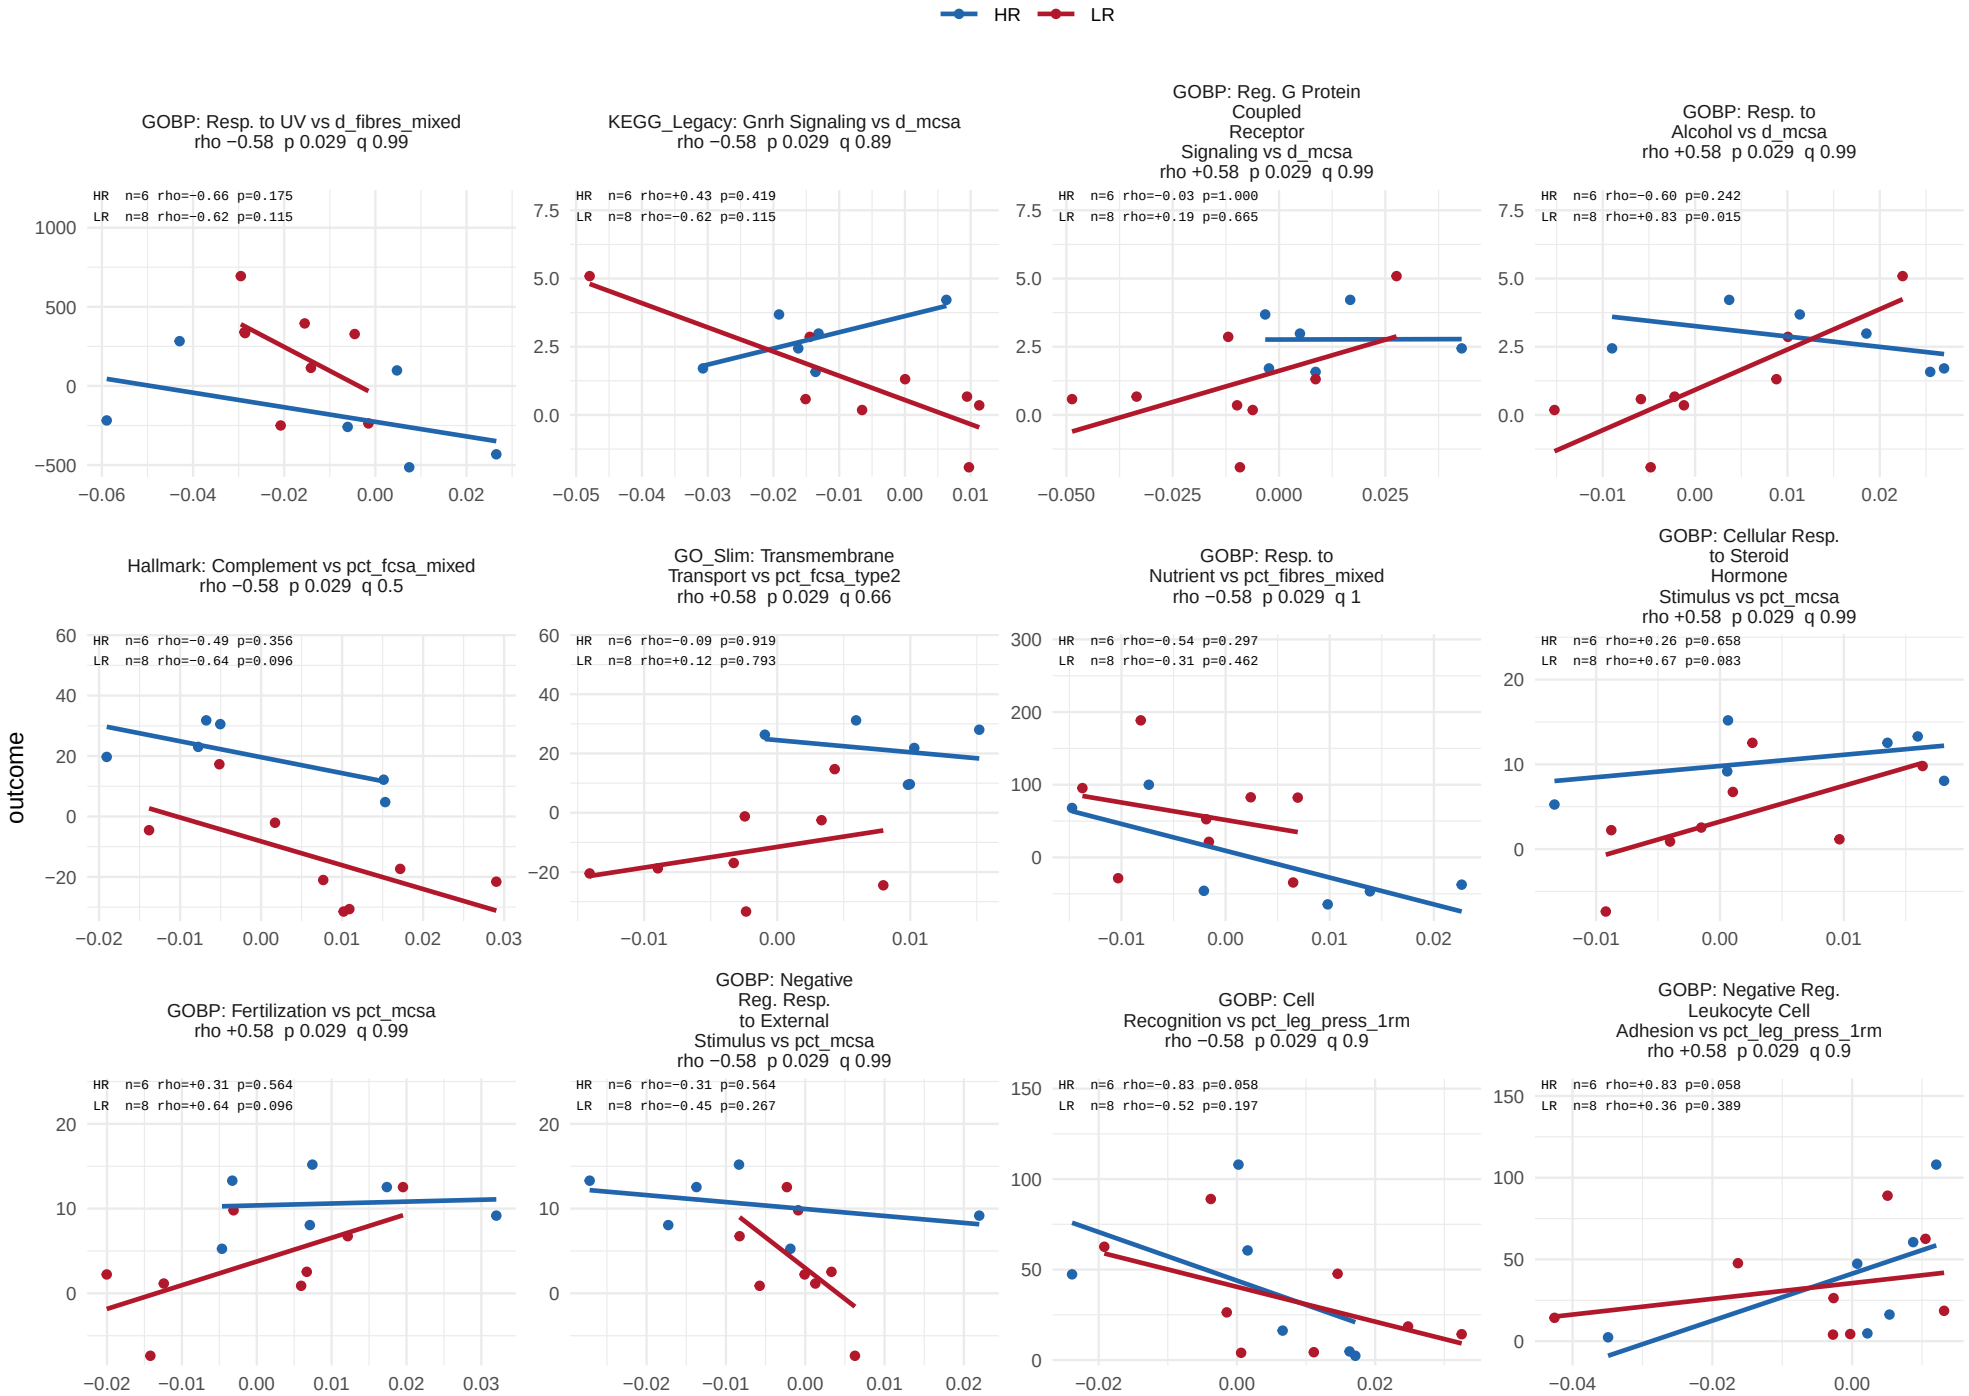

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


923 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

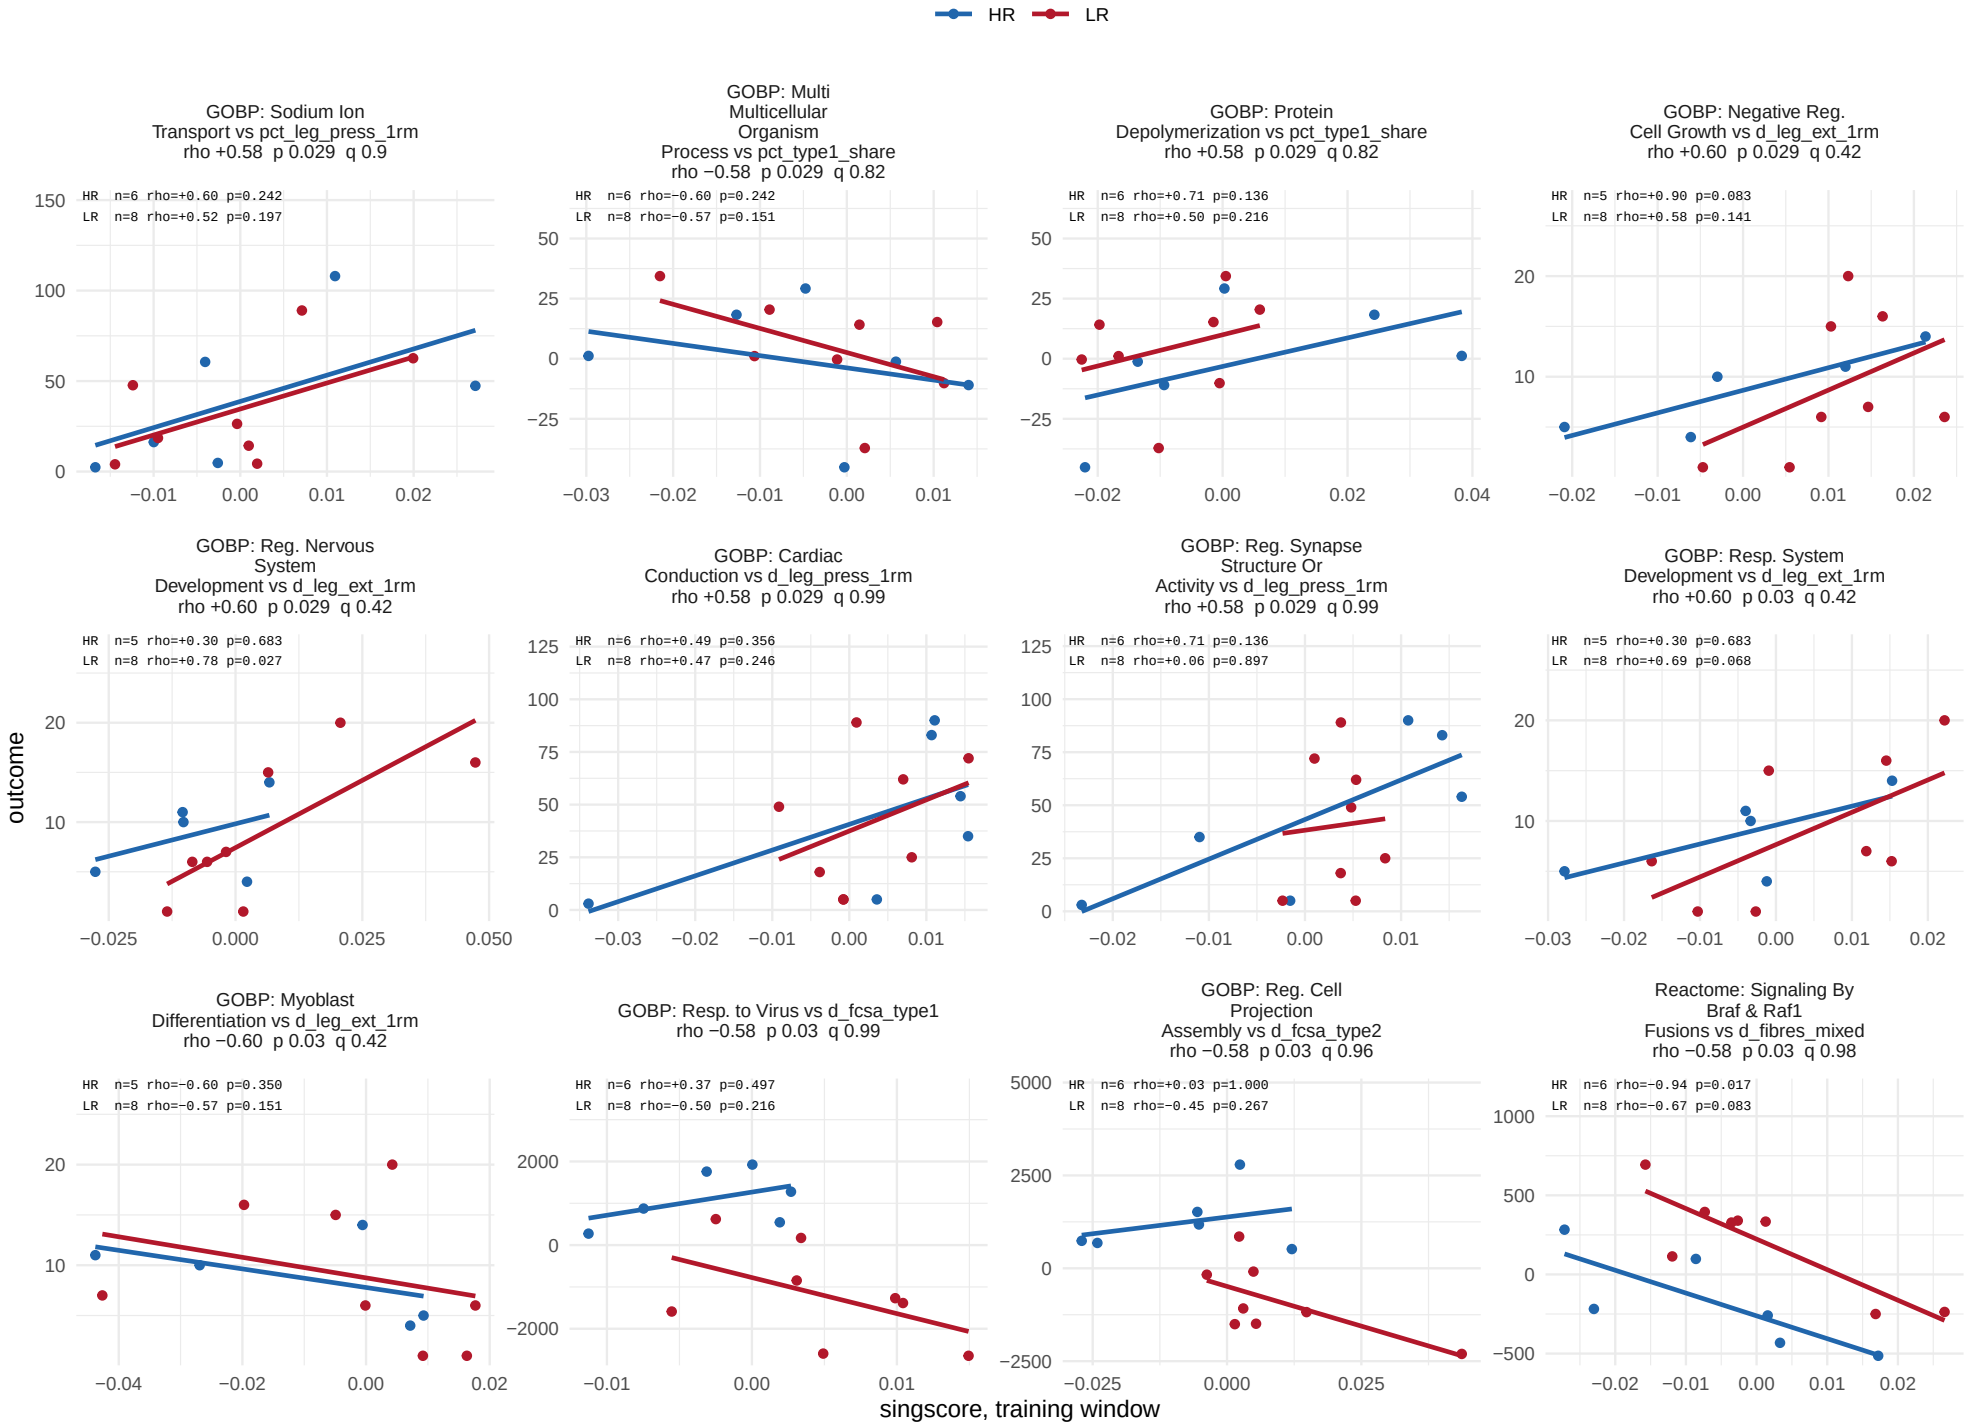

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


923 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

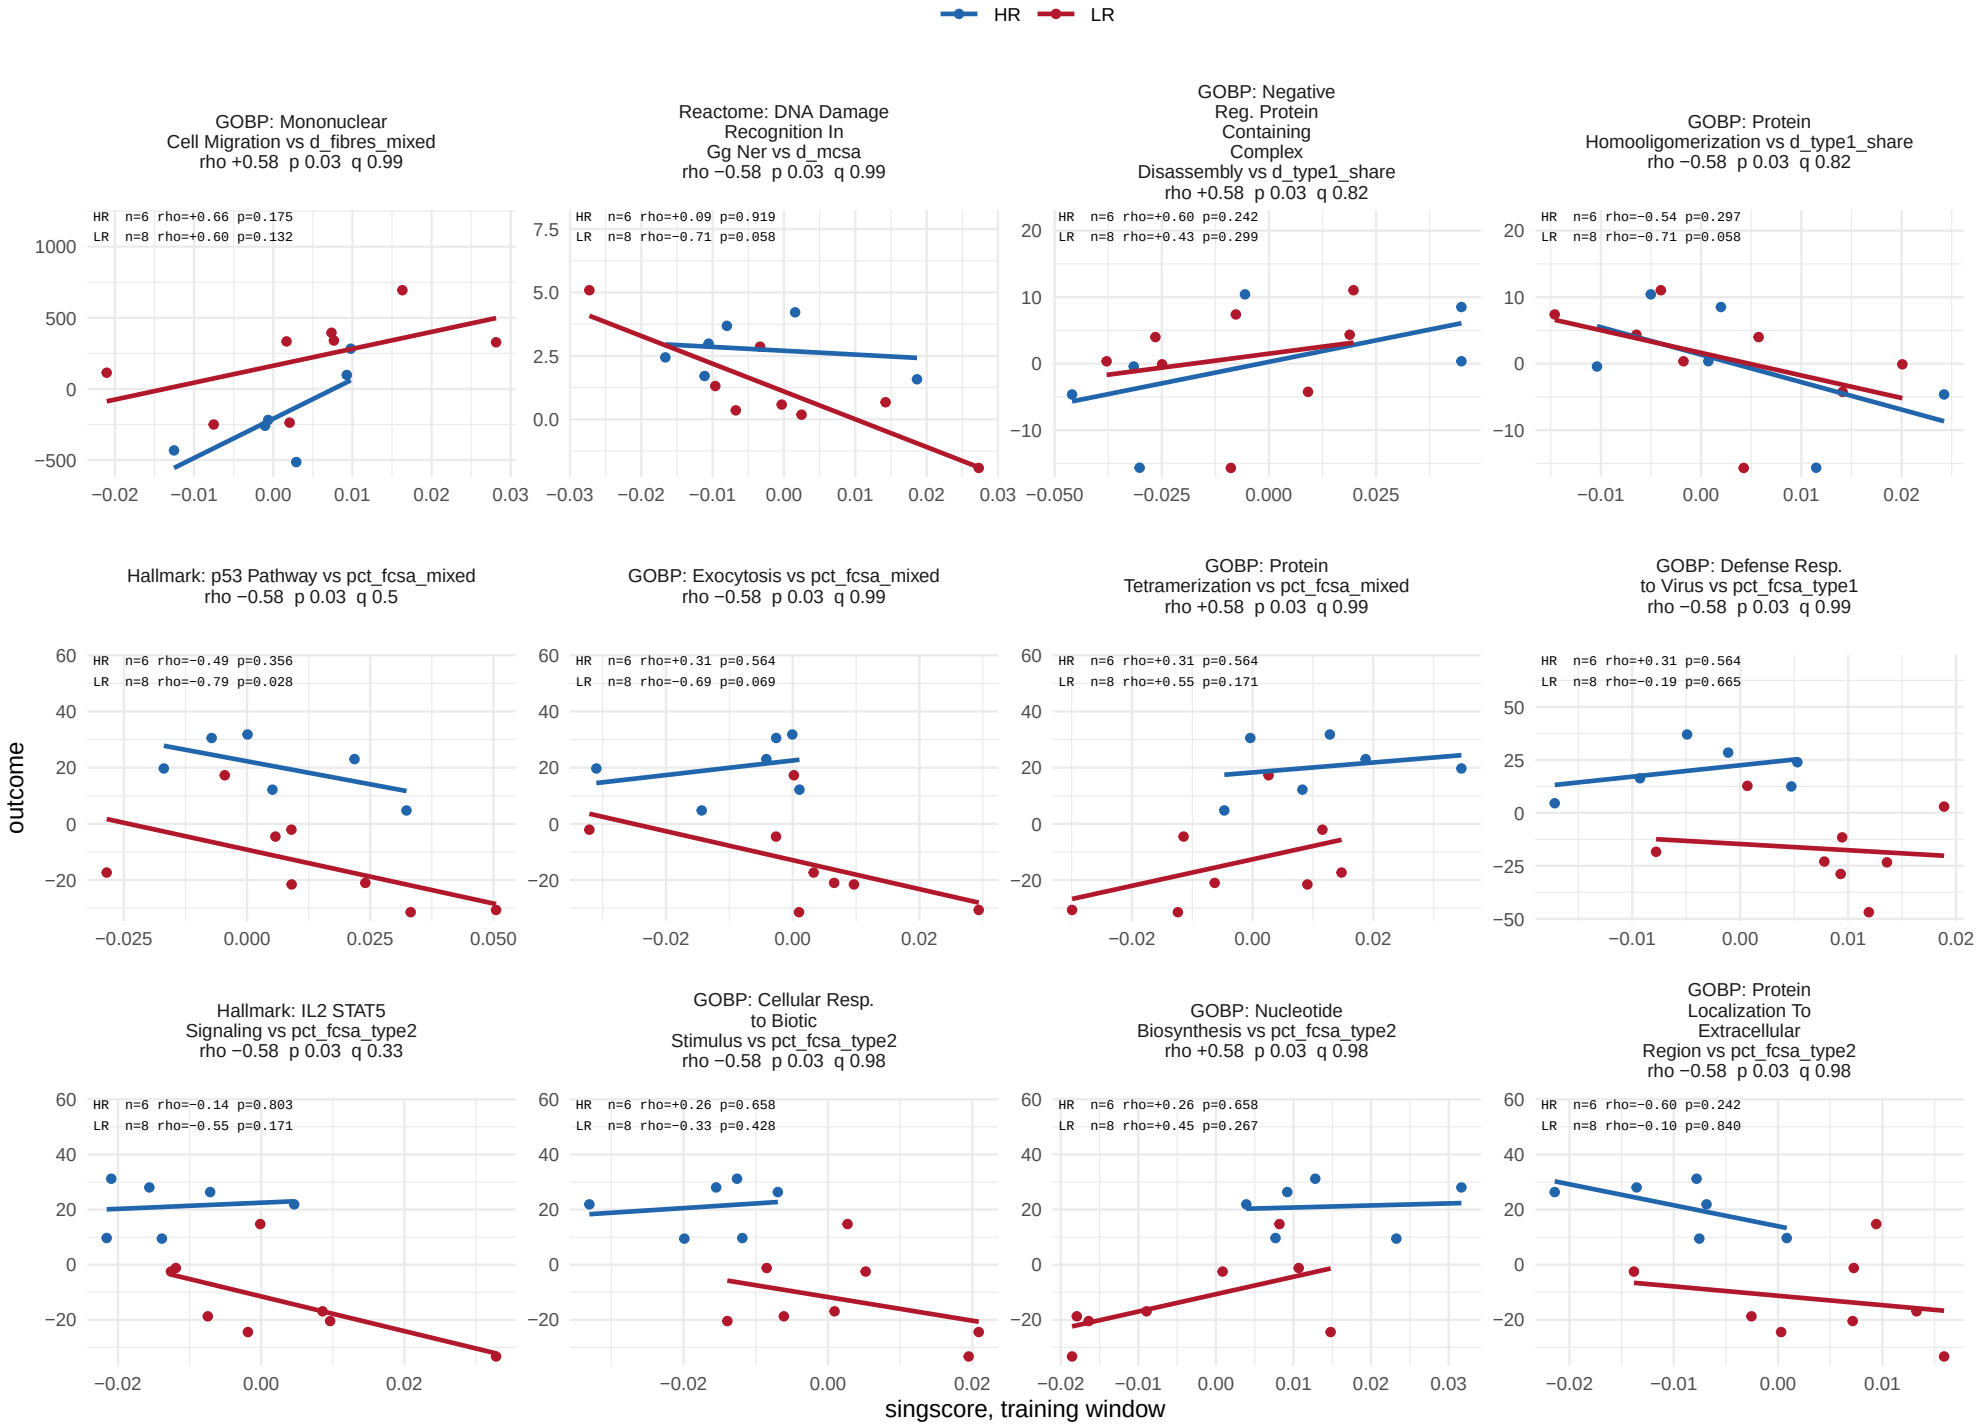

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


923 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

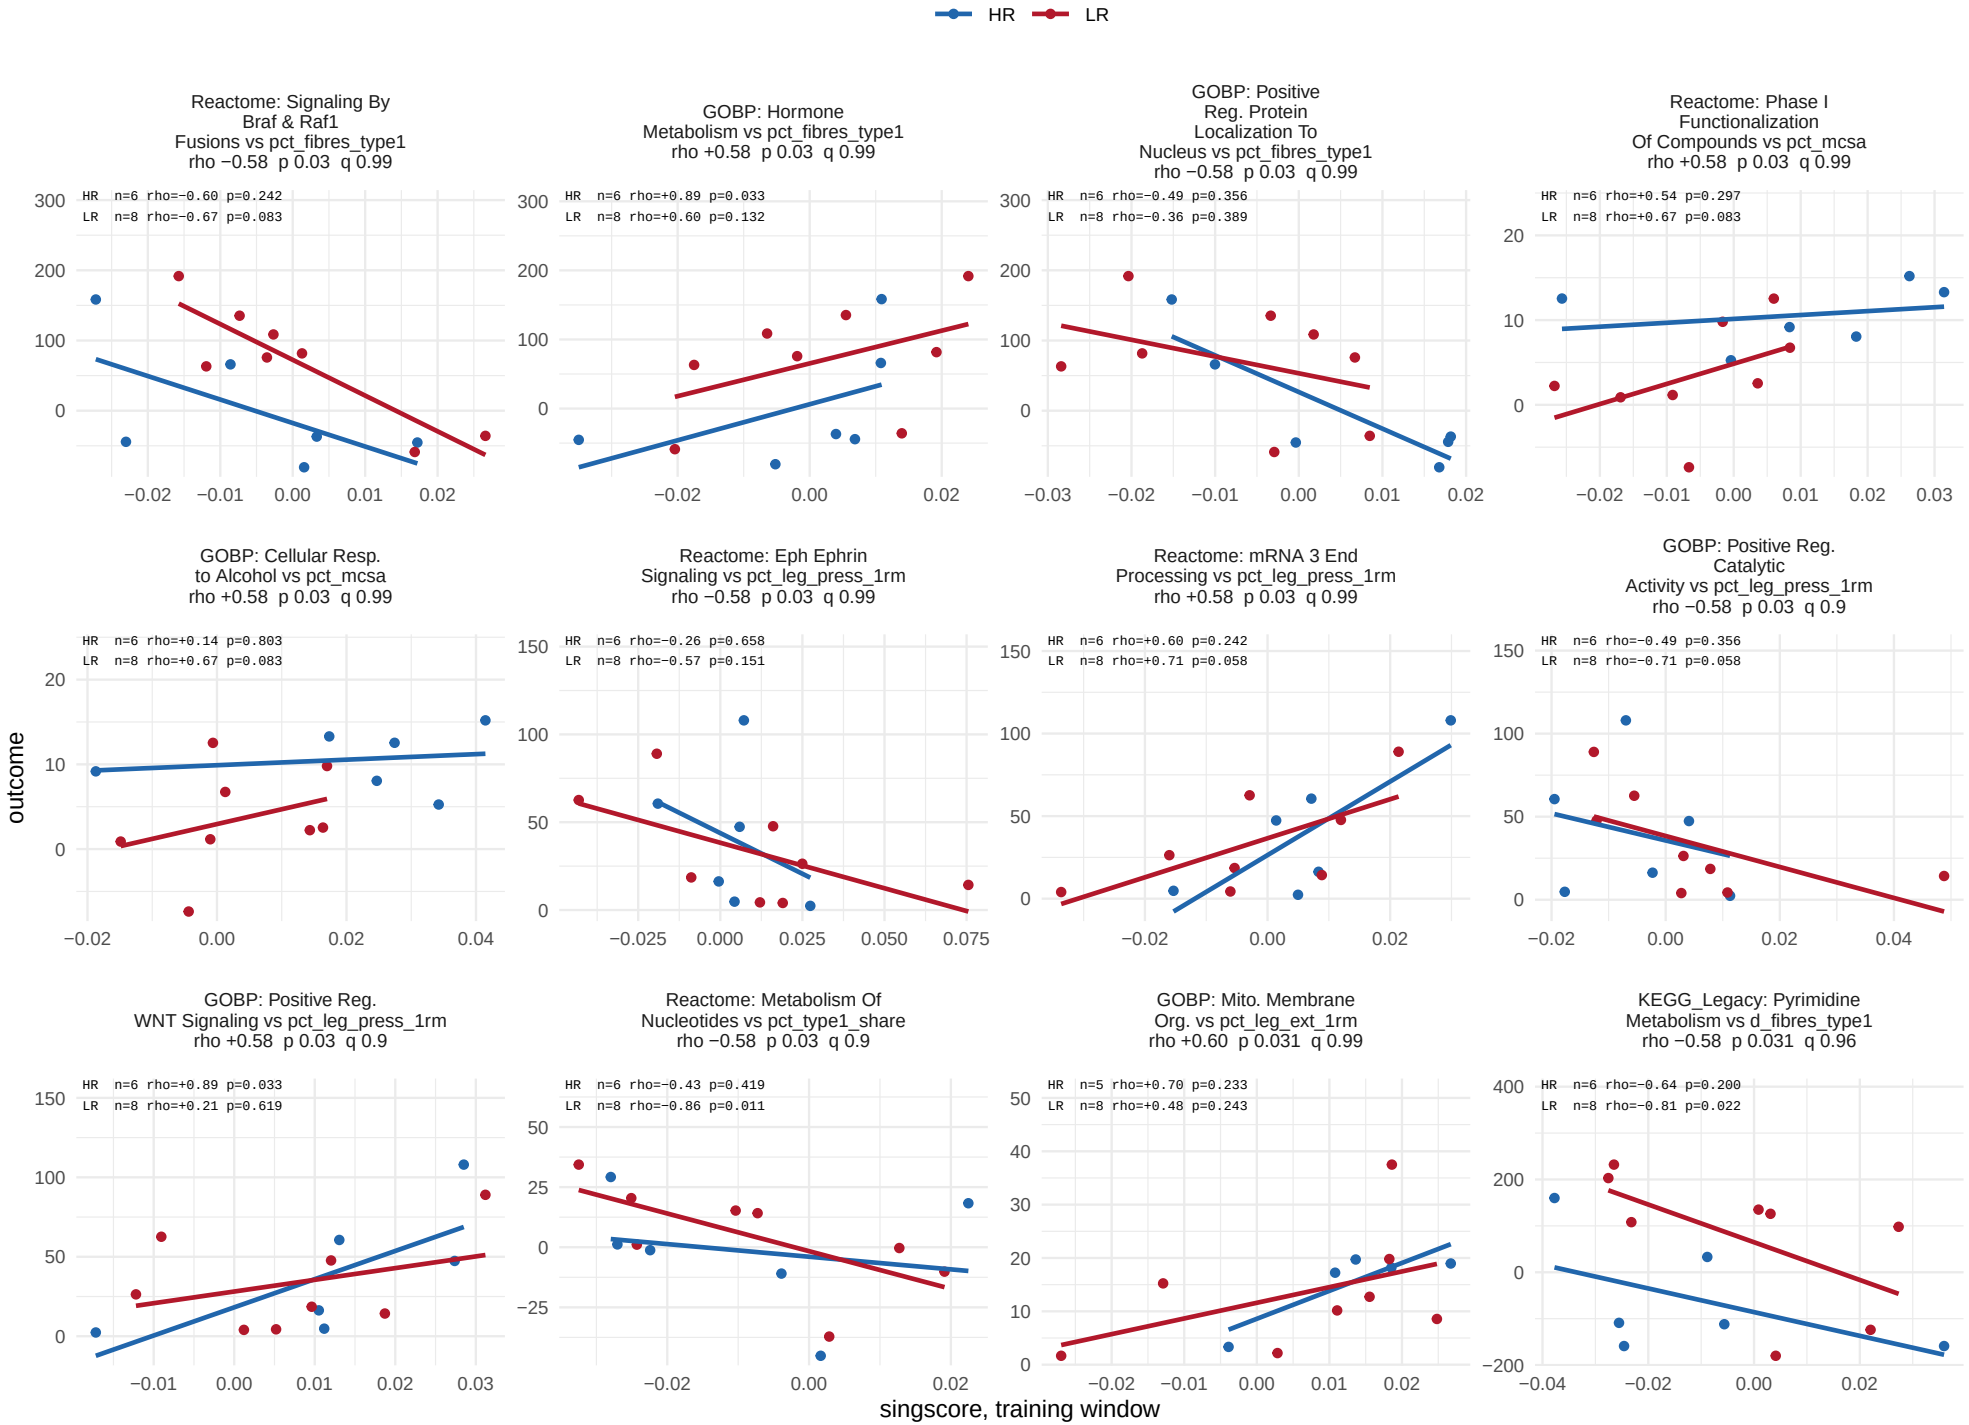

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


923 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

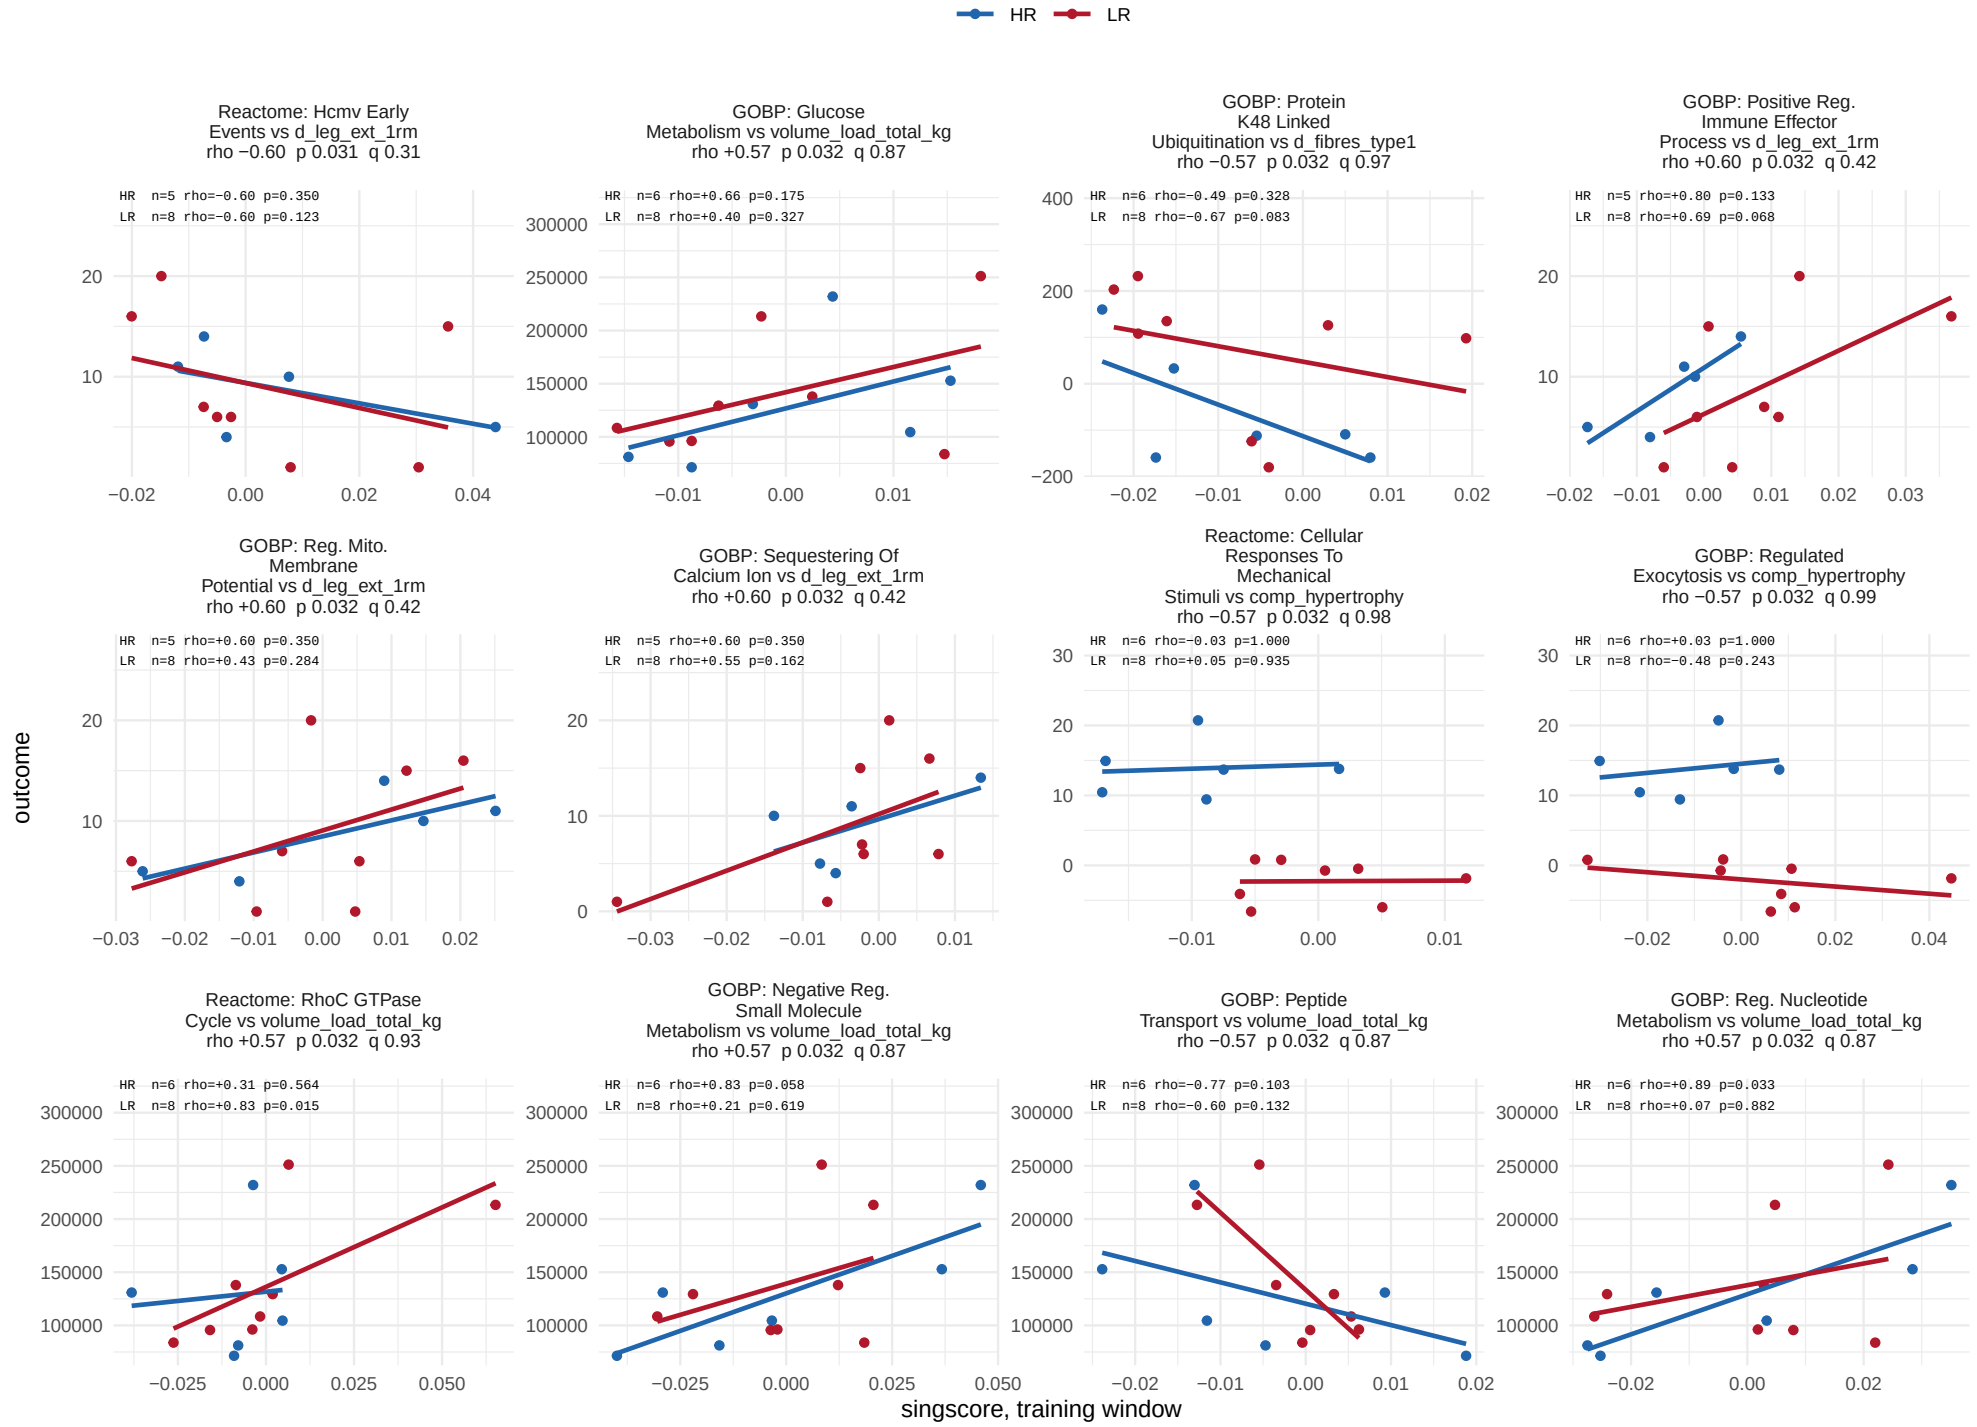

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


923 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

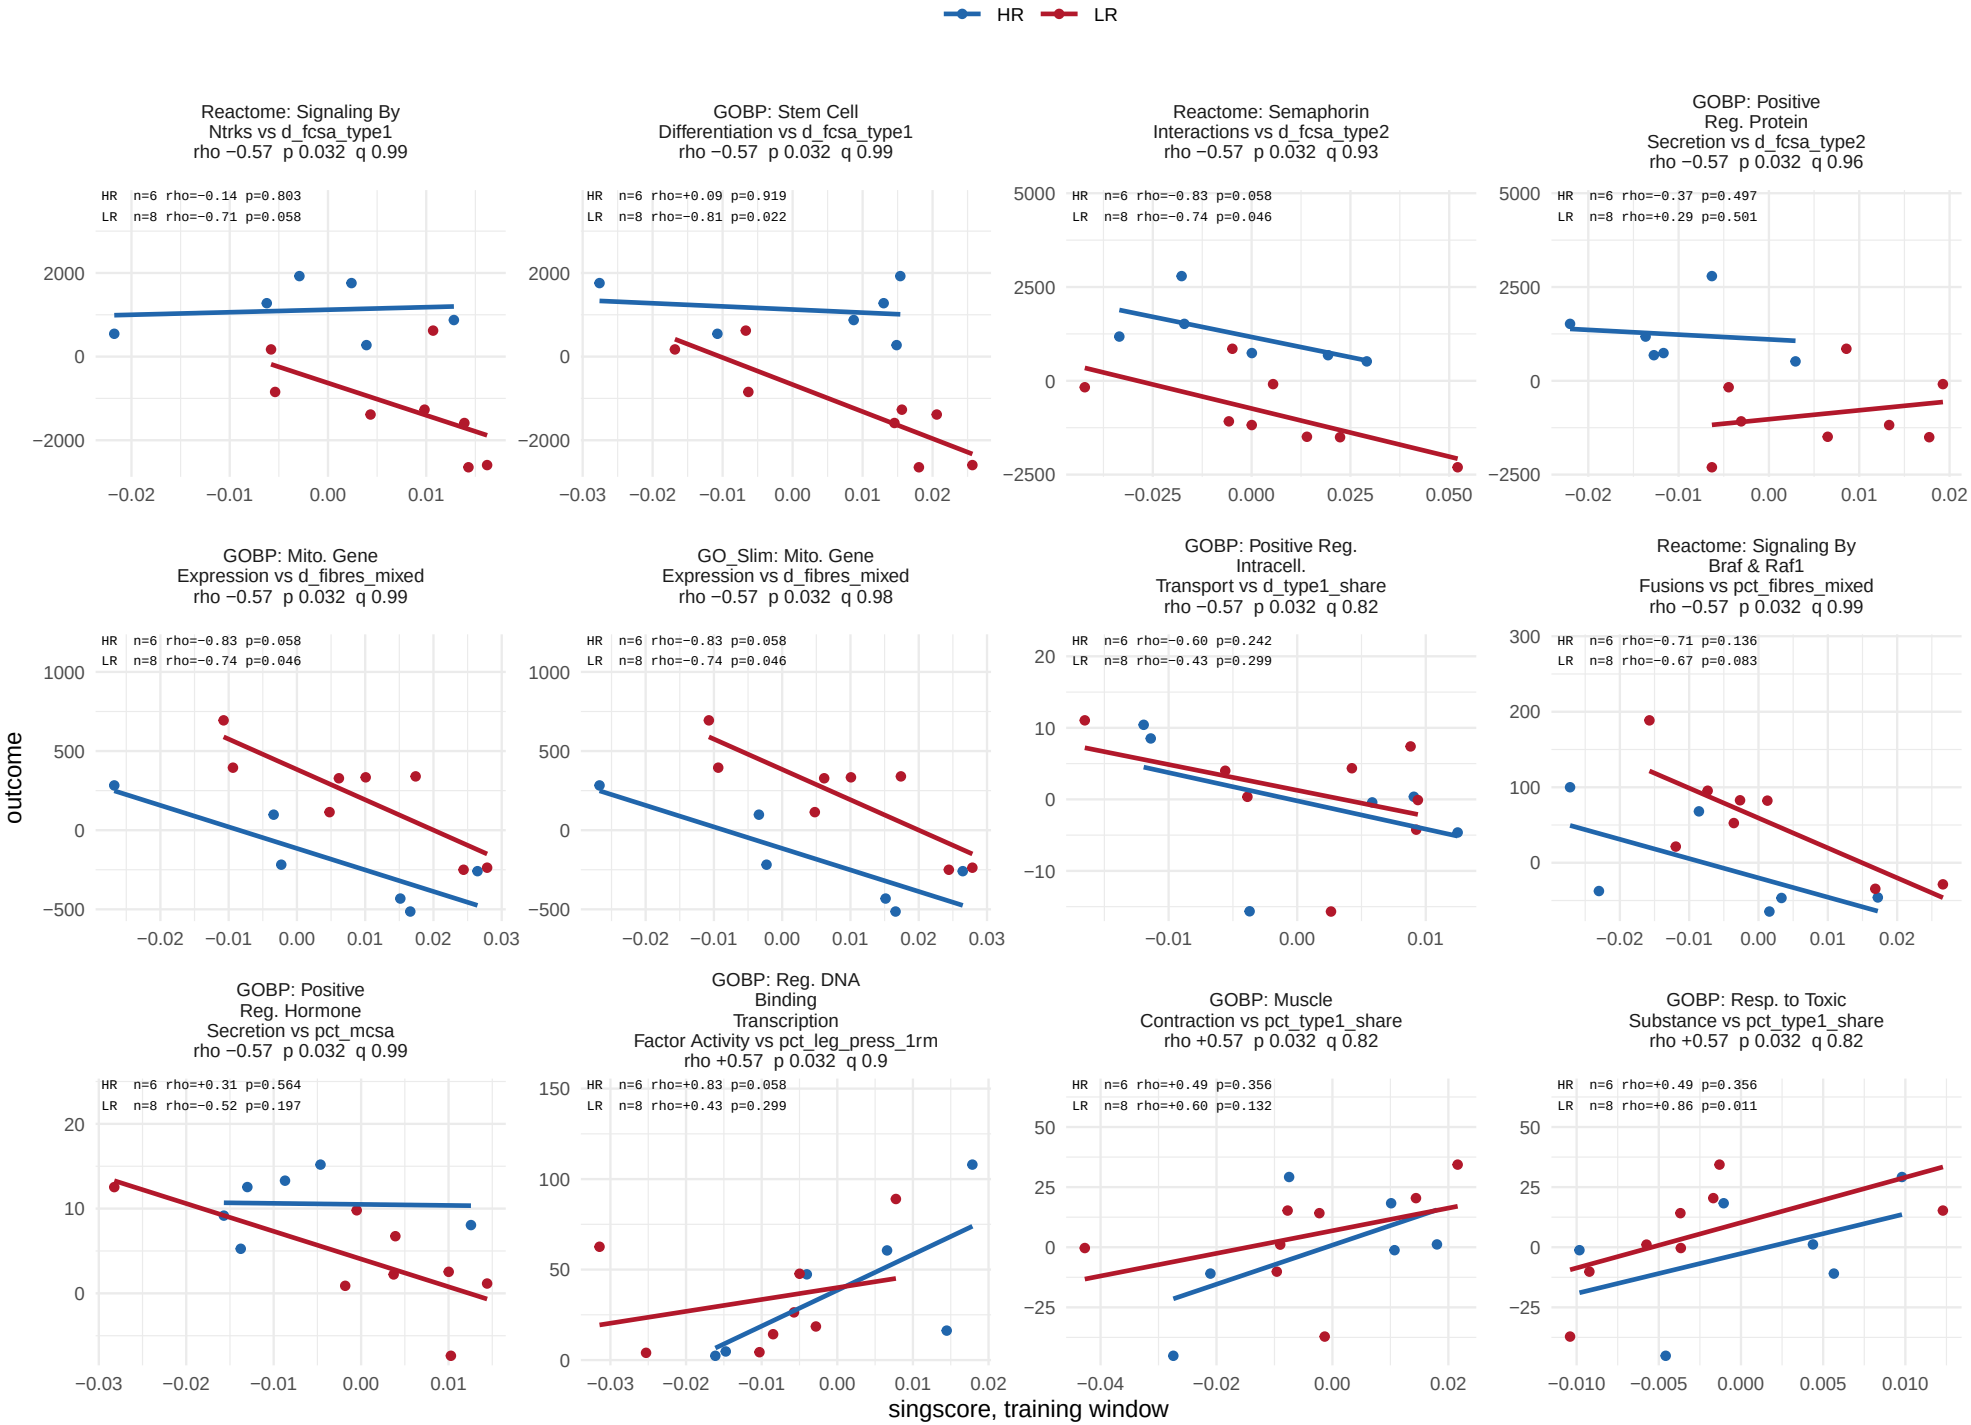

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


923 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

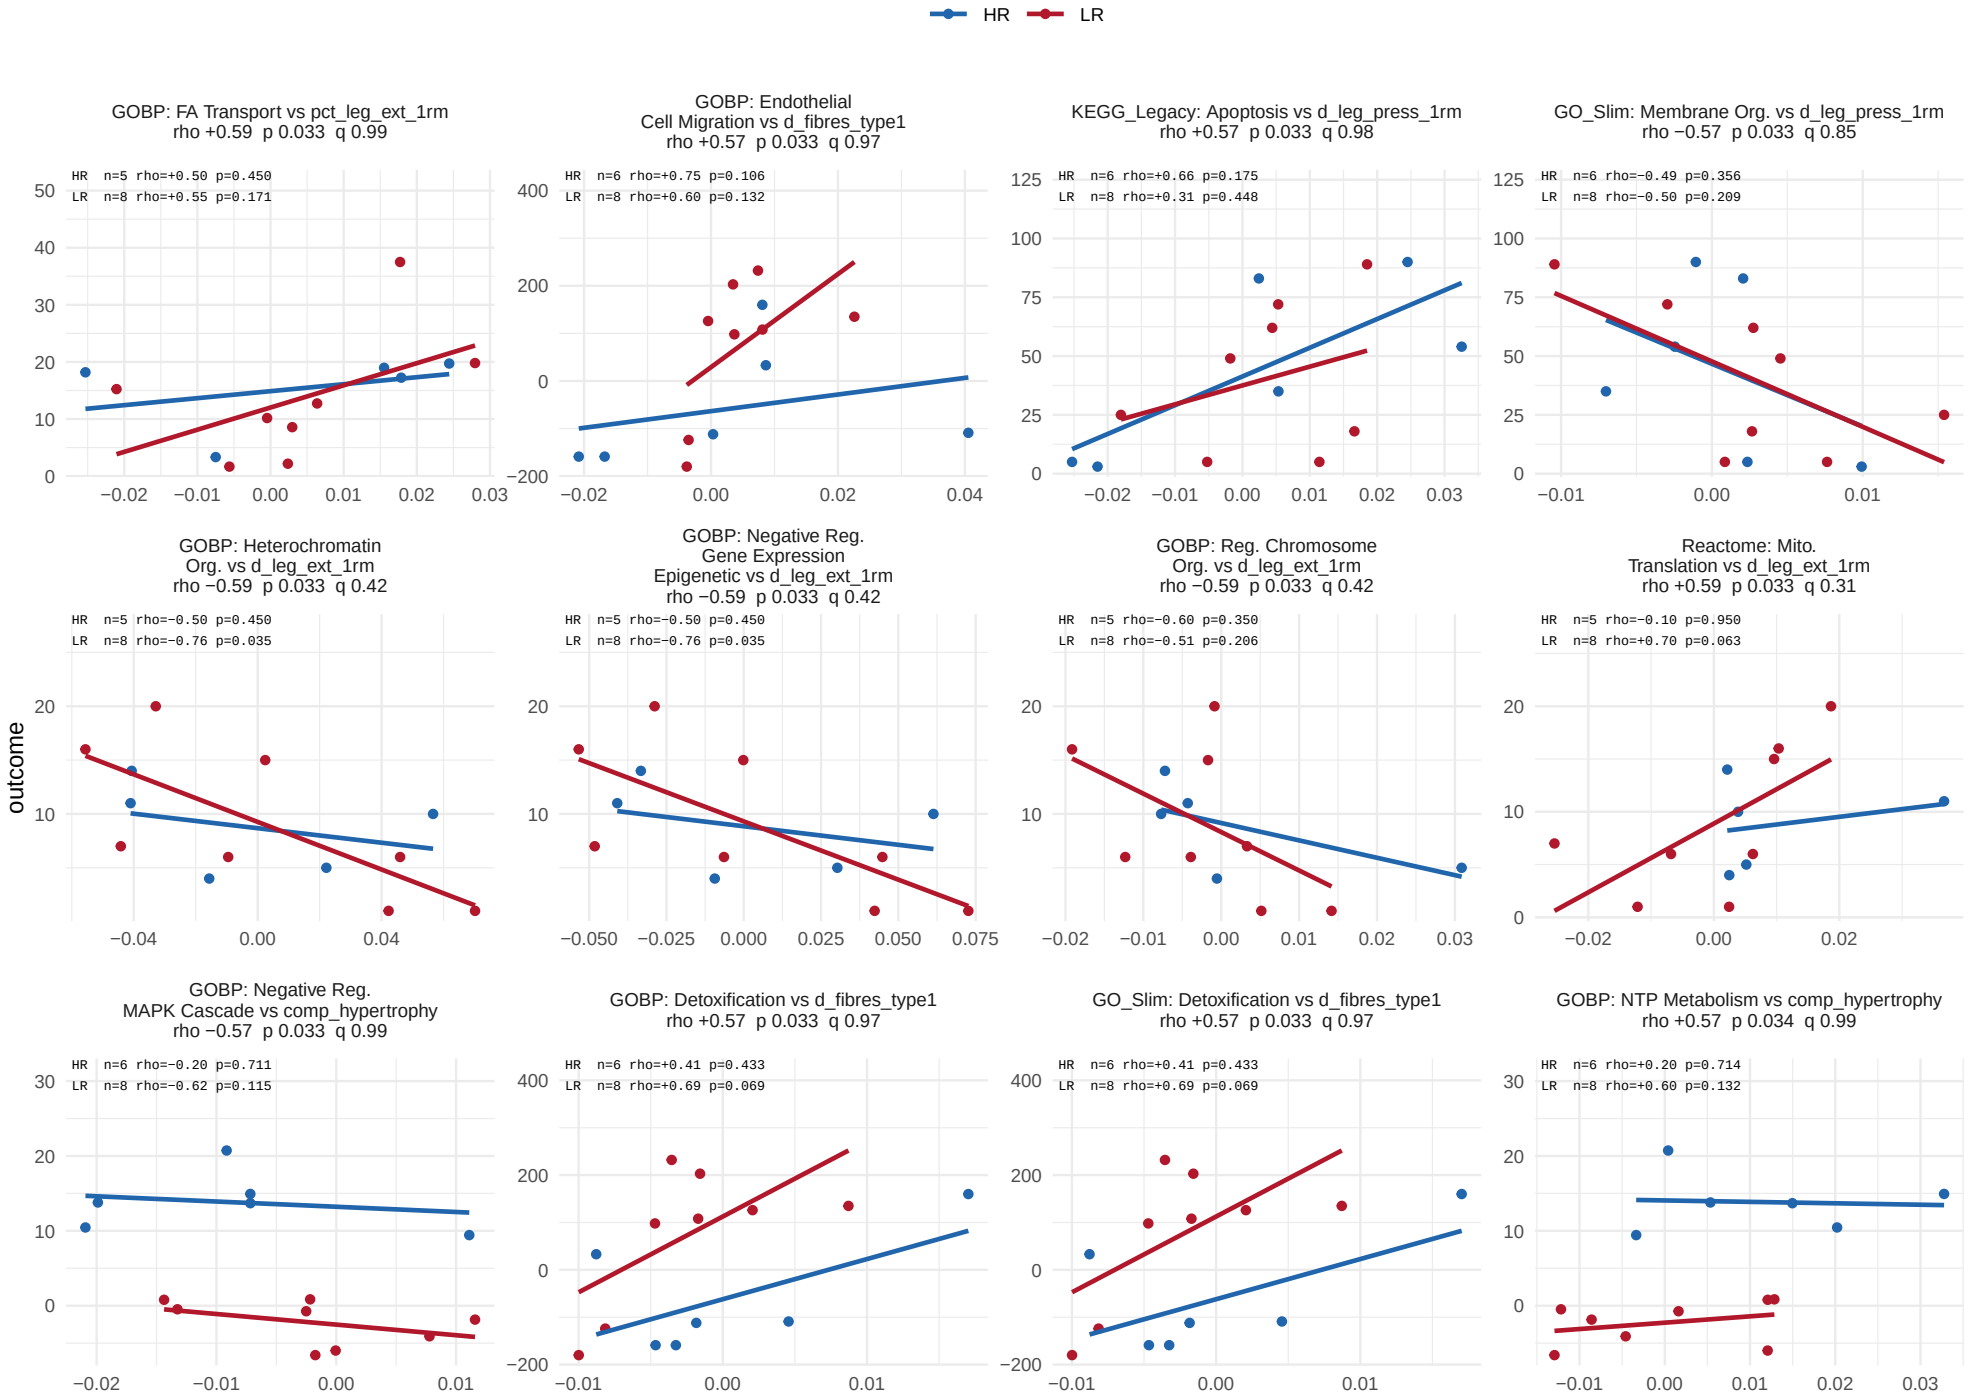

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


923 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

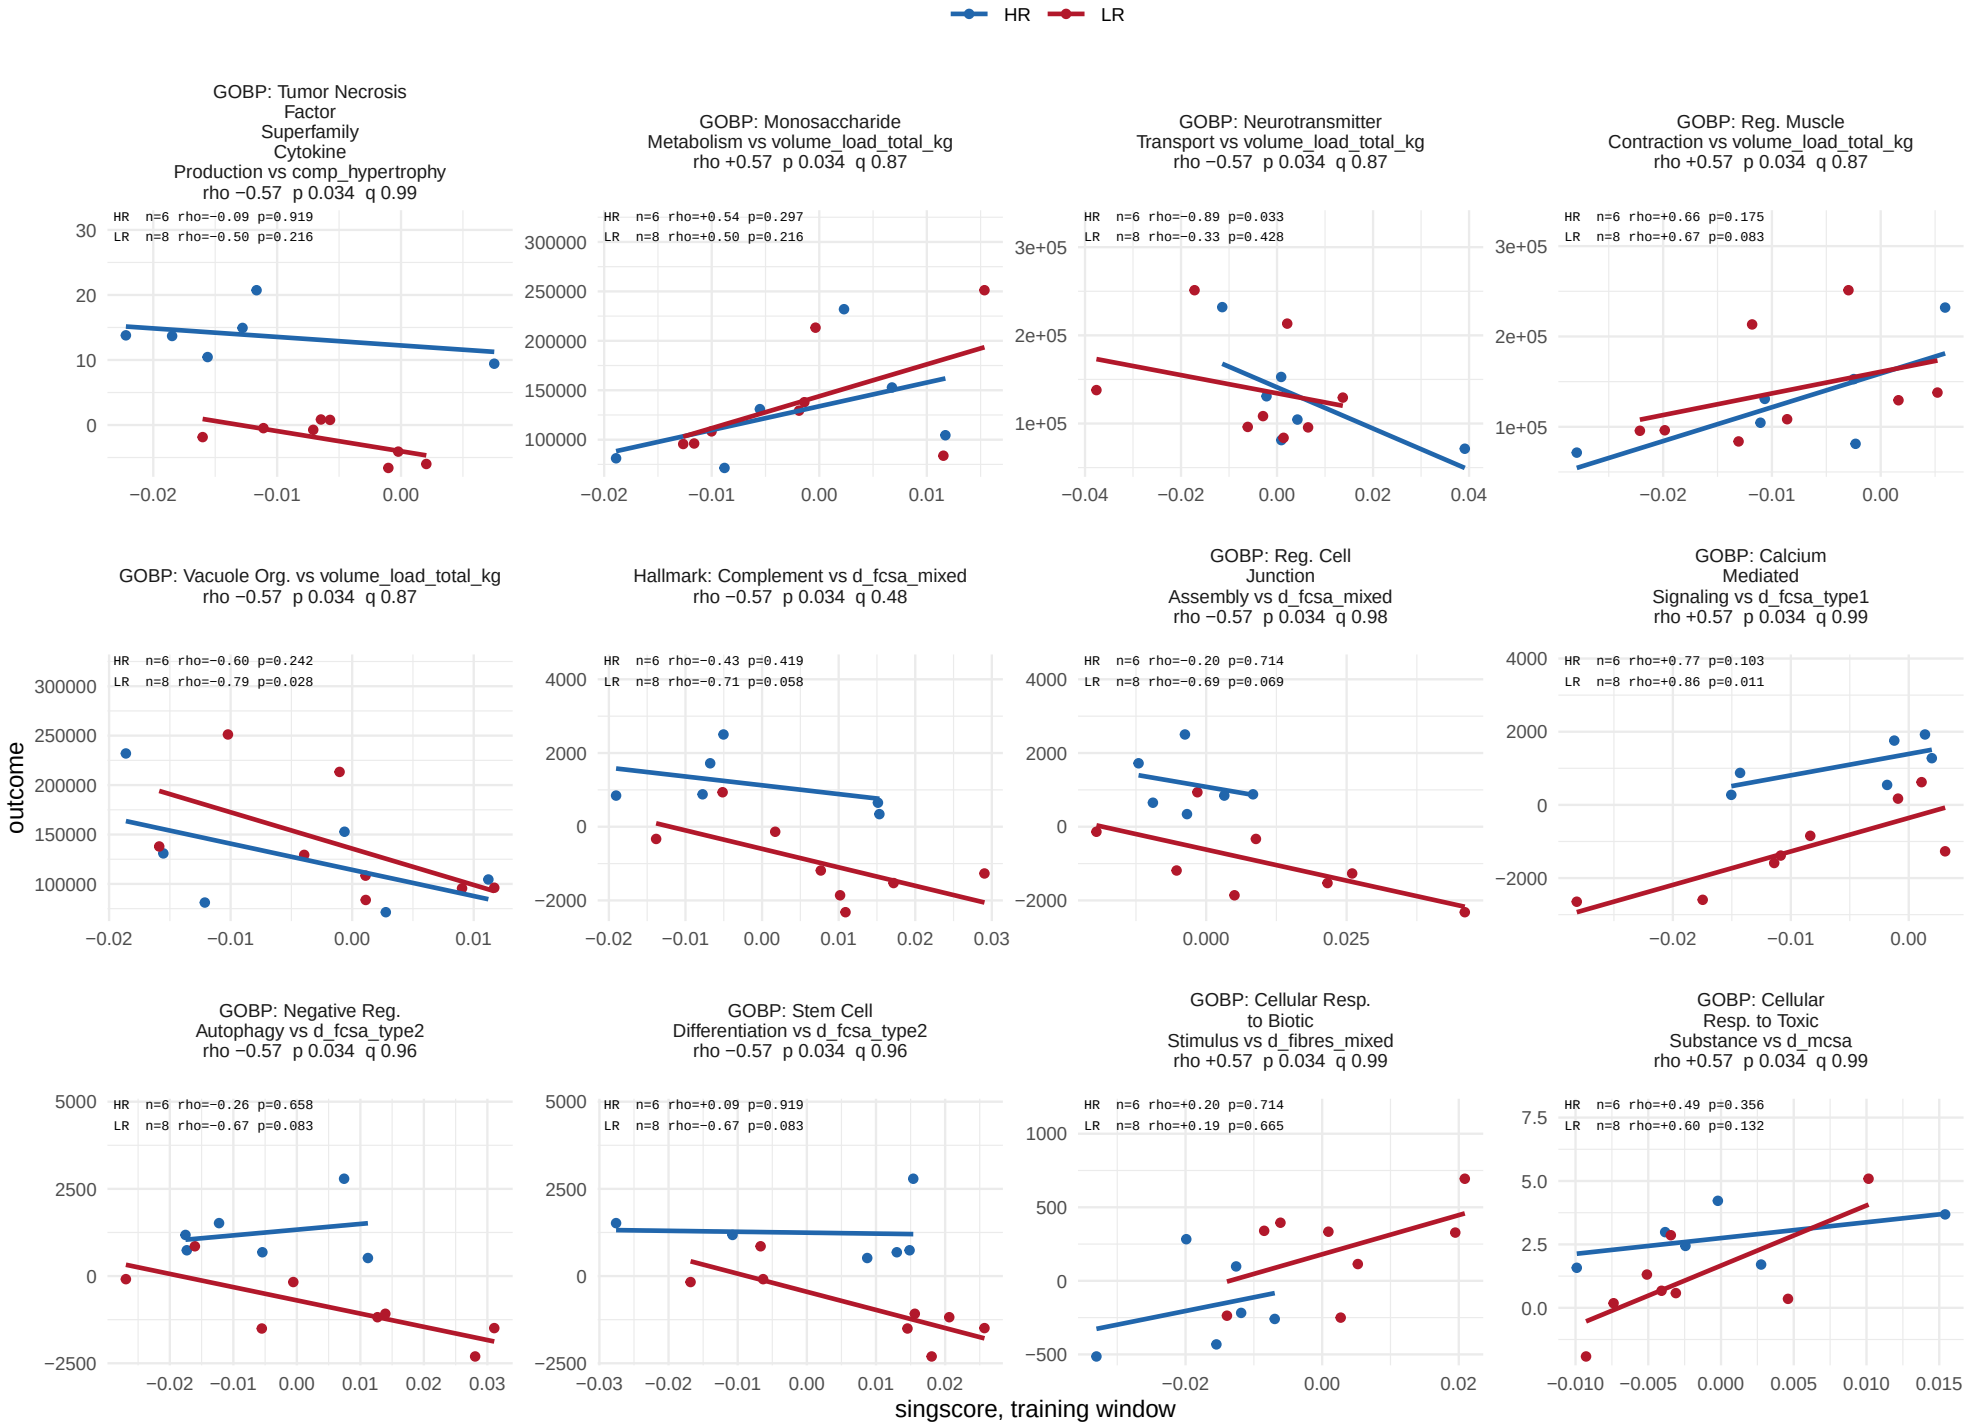

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


923 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

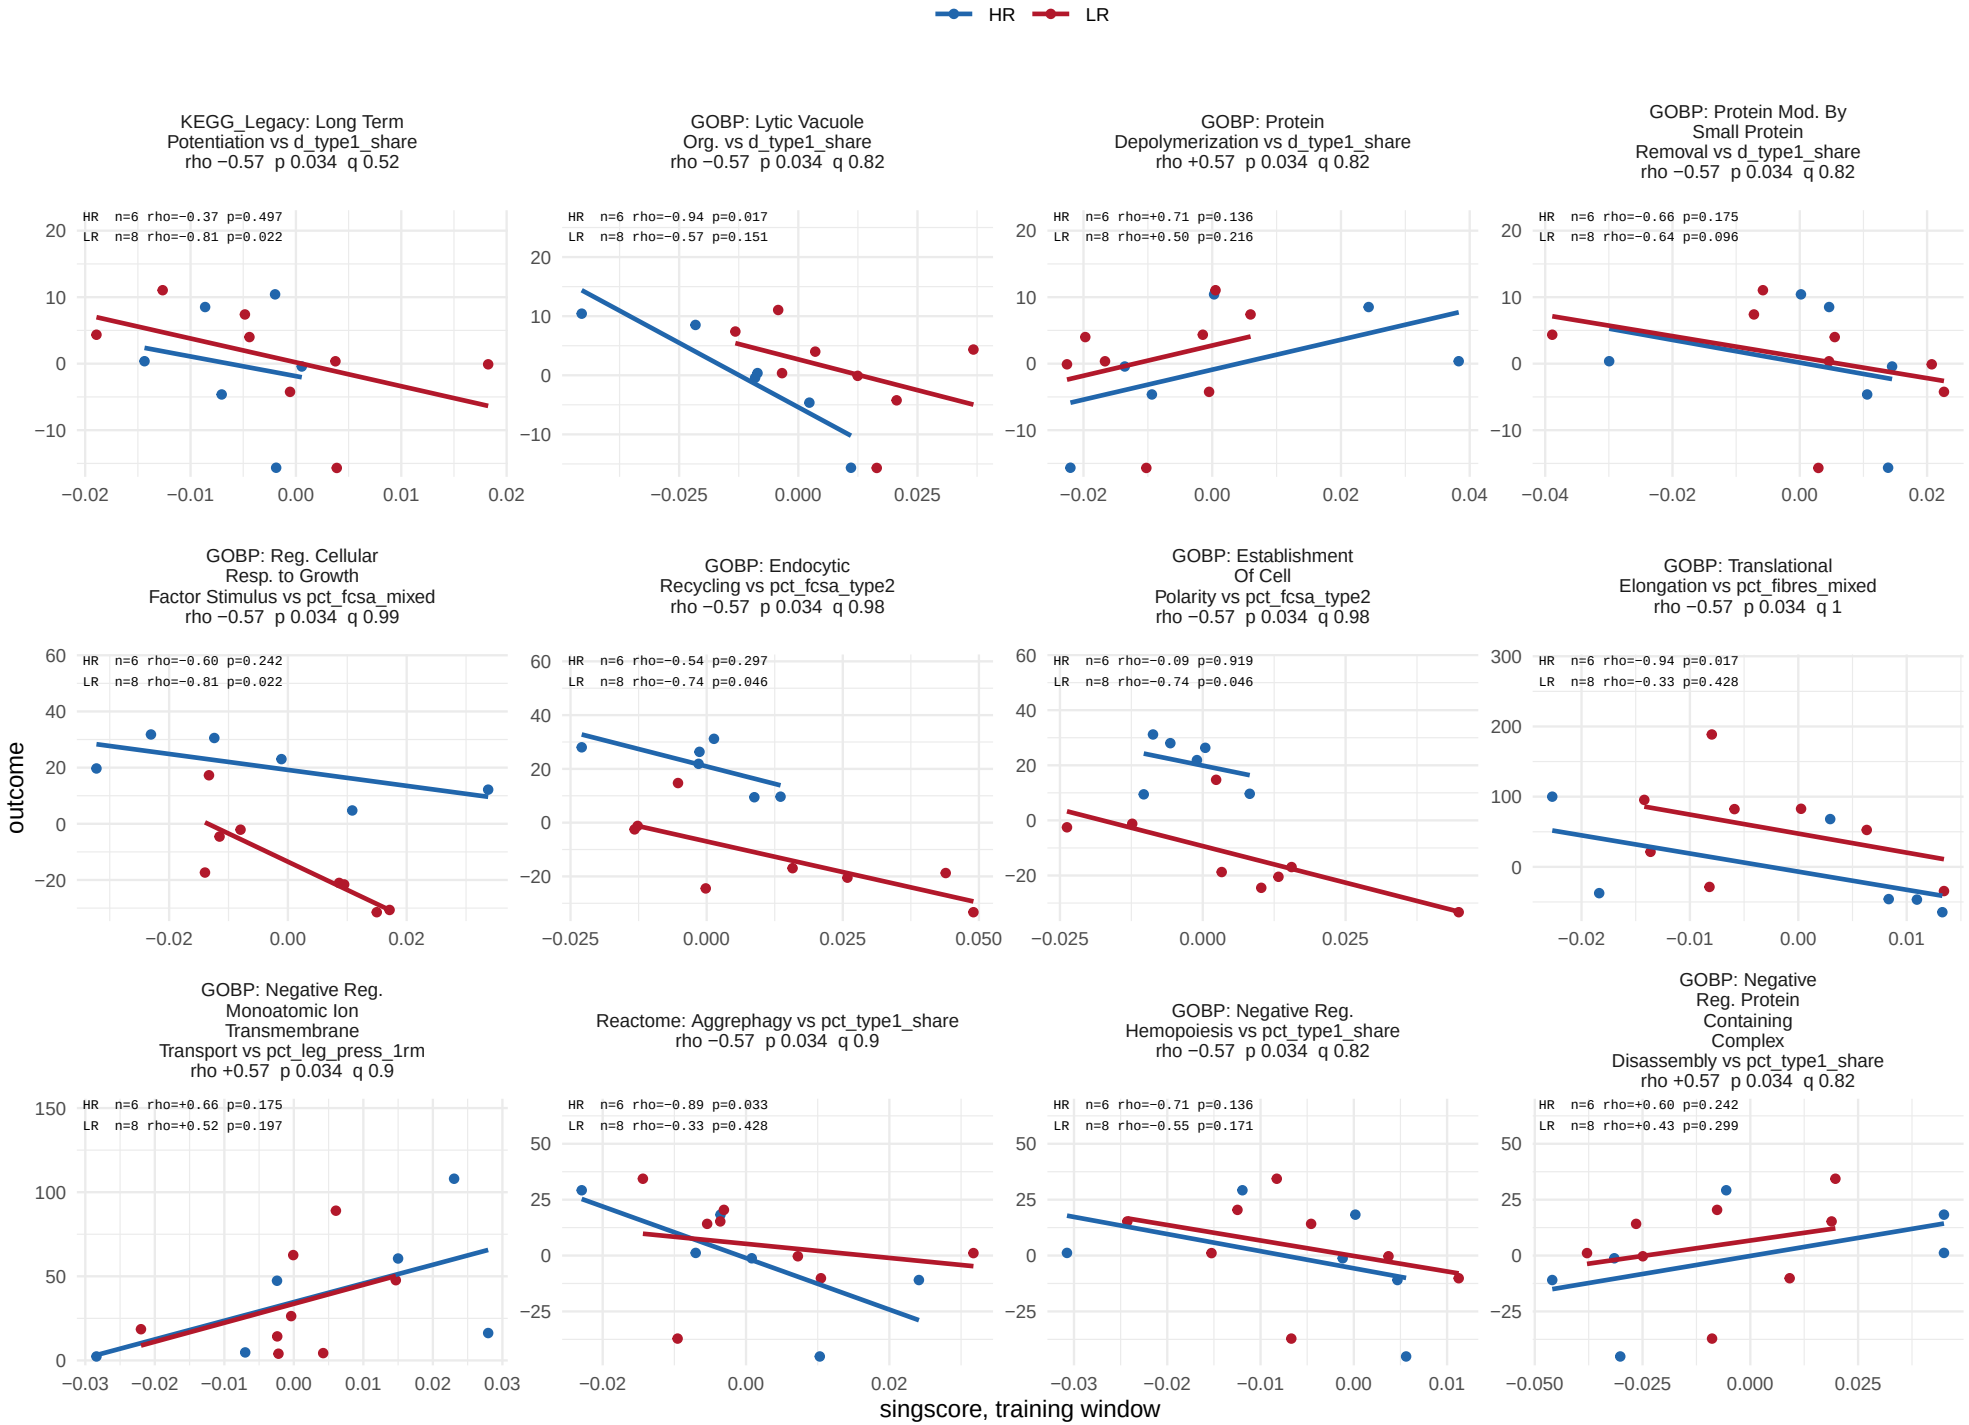

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


923 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

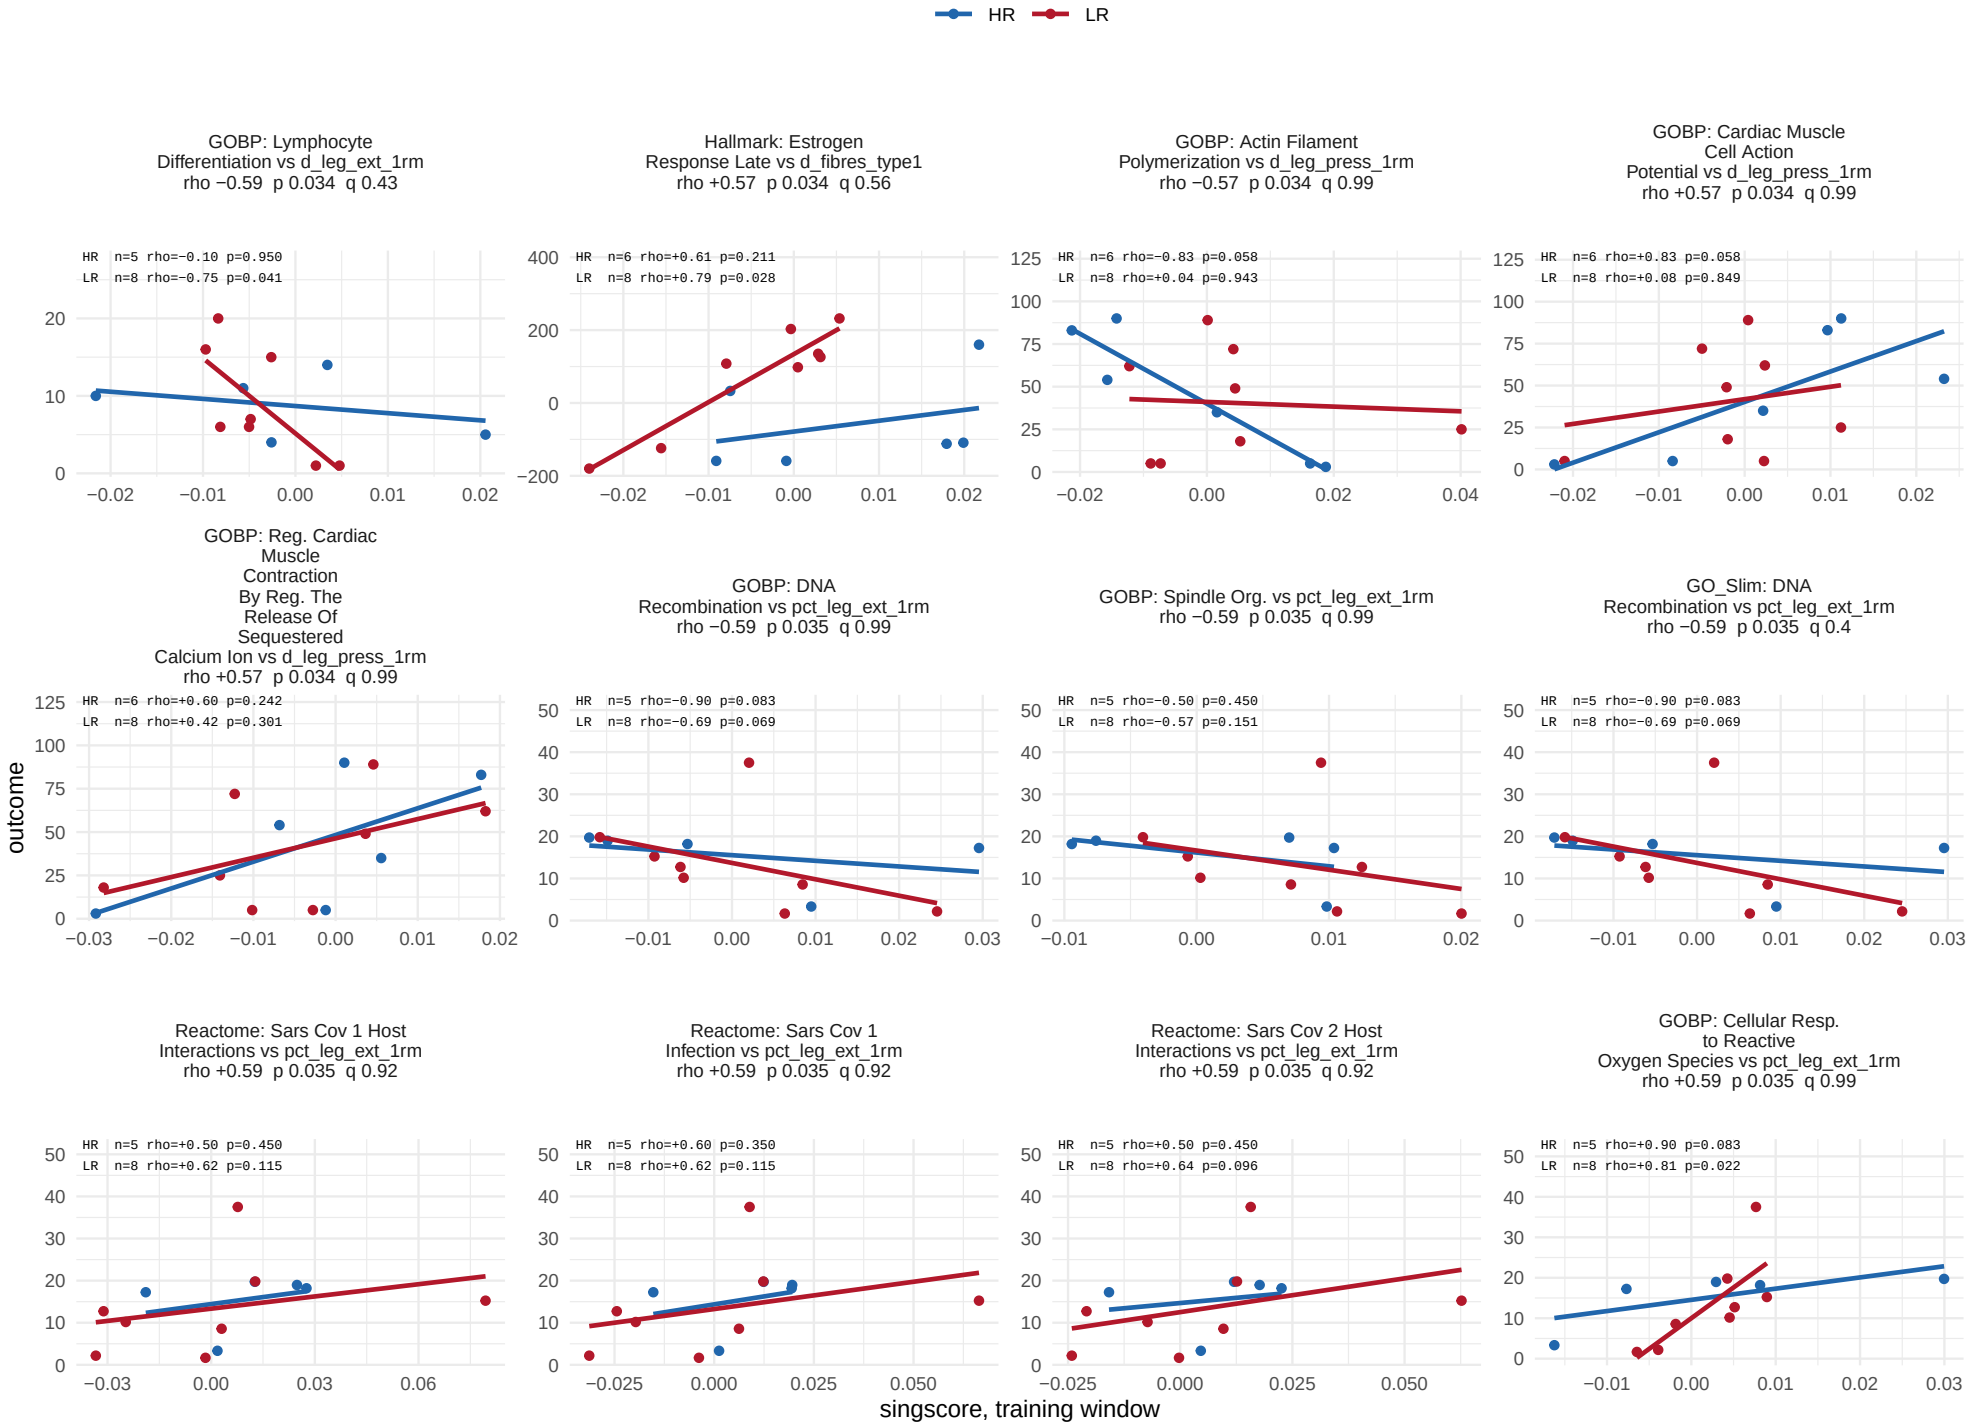

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


923 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

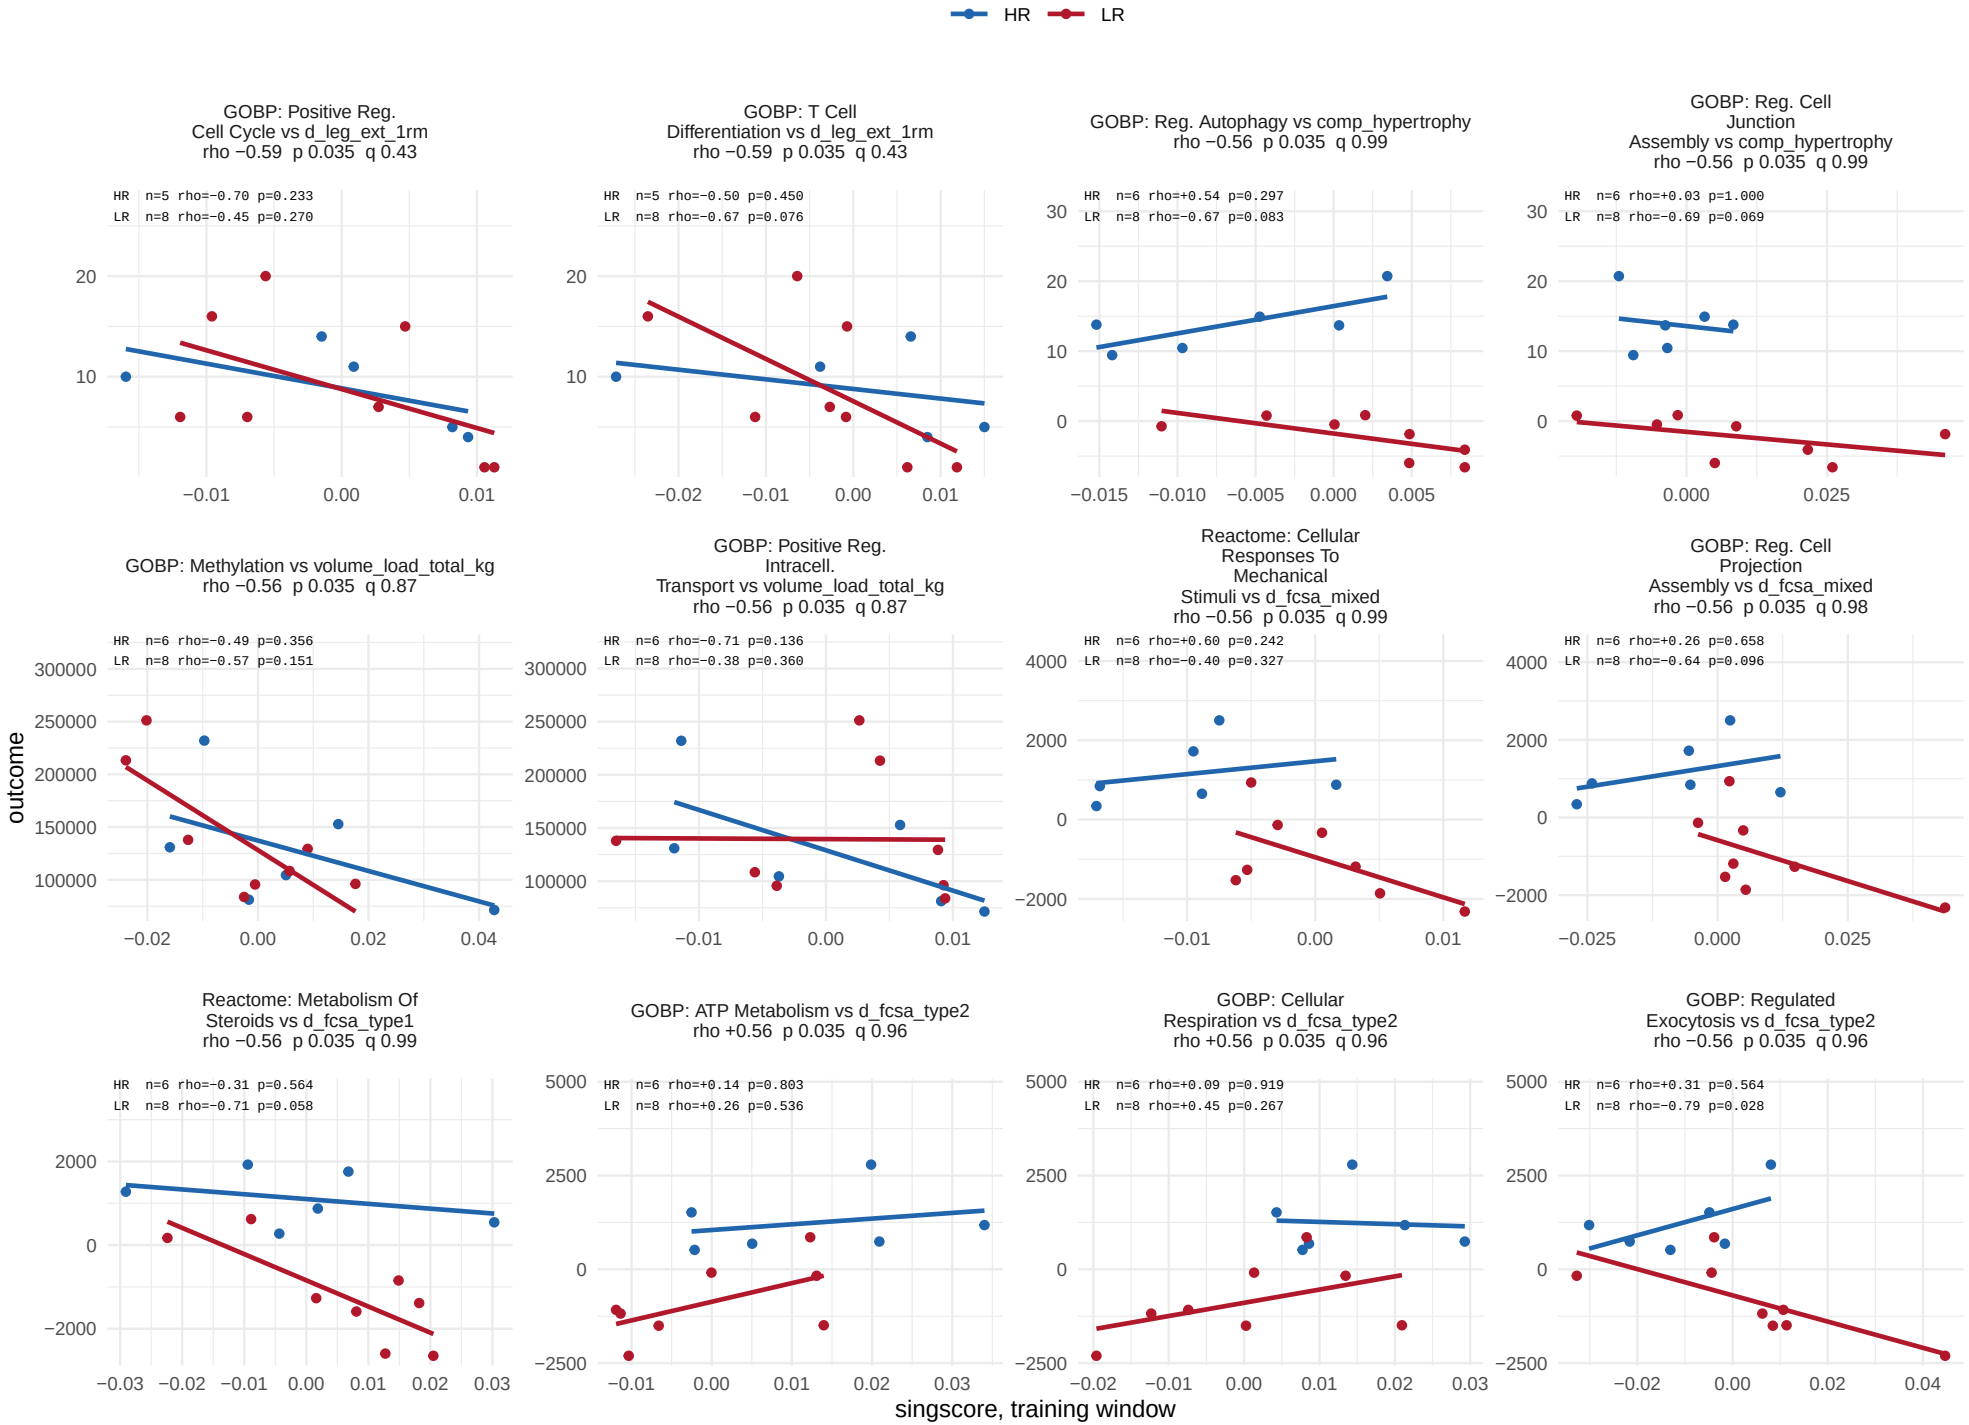

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


923 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

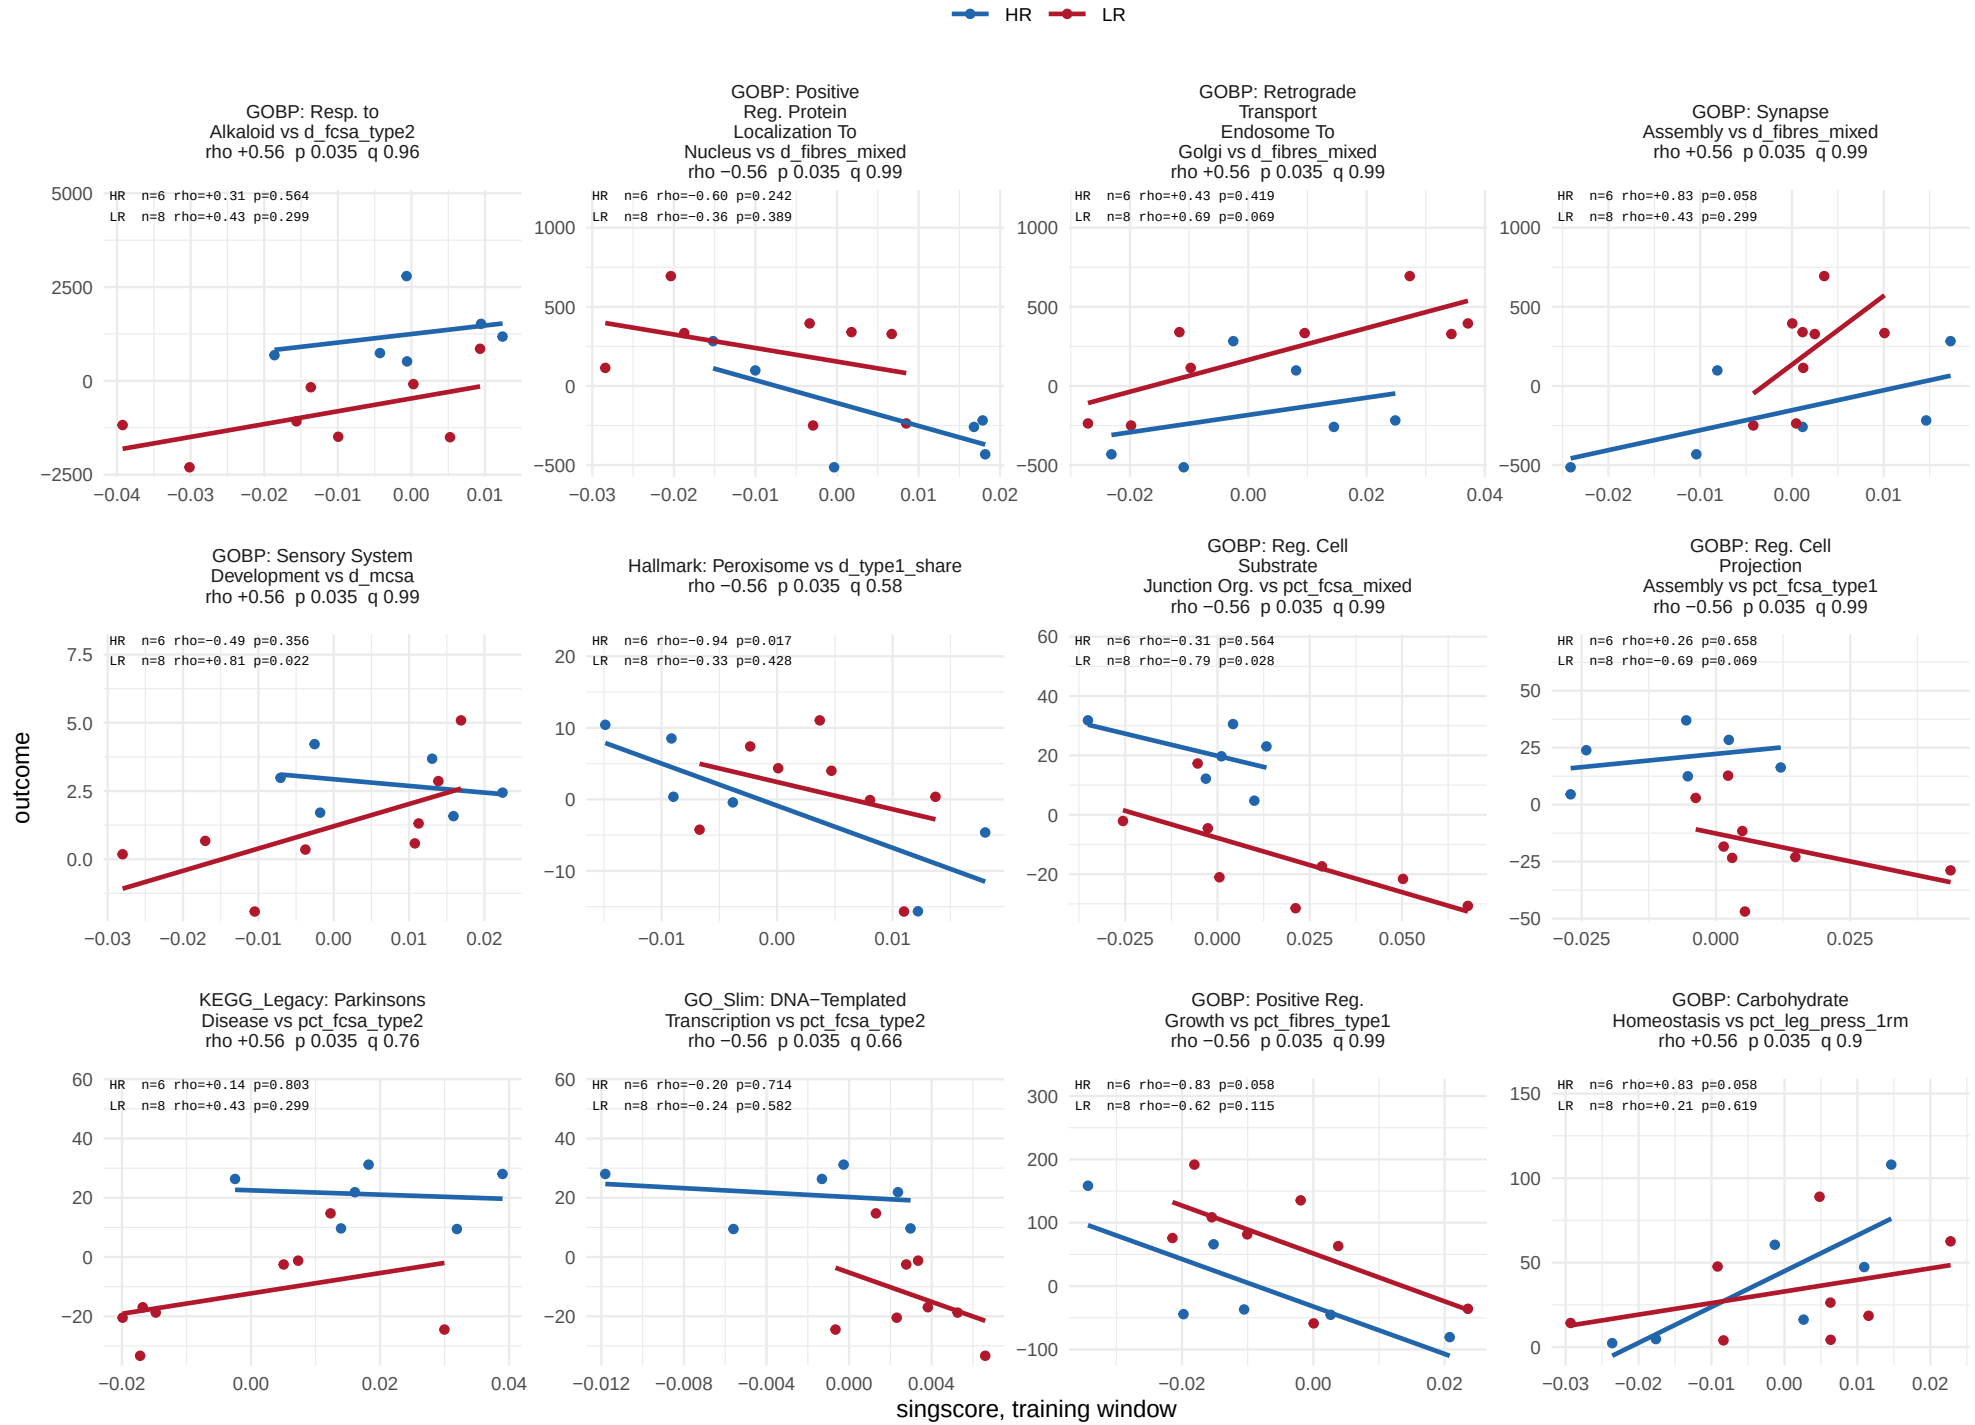

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


923 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

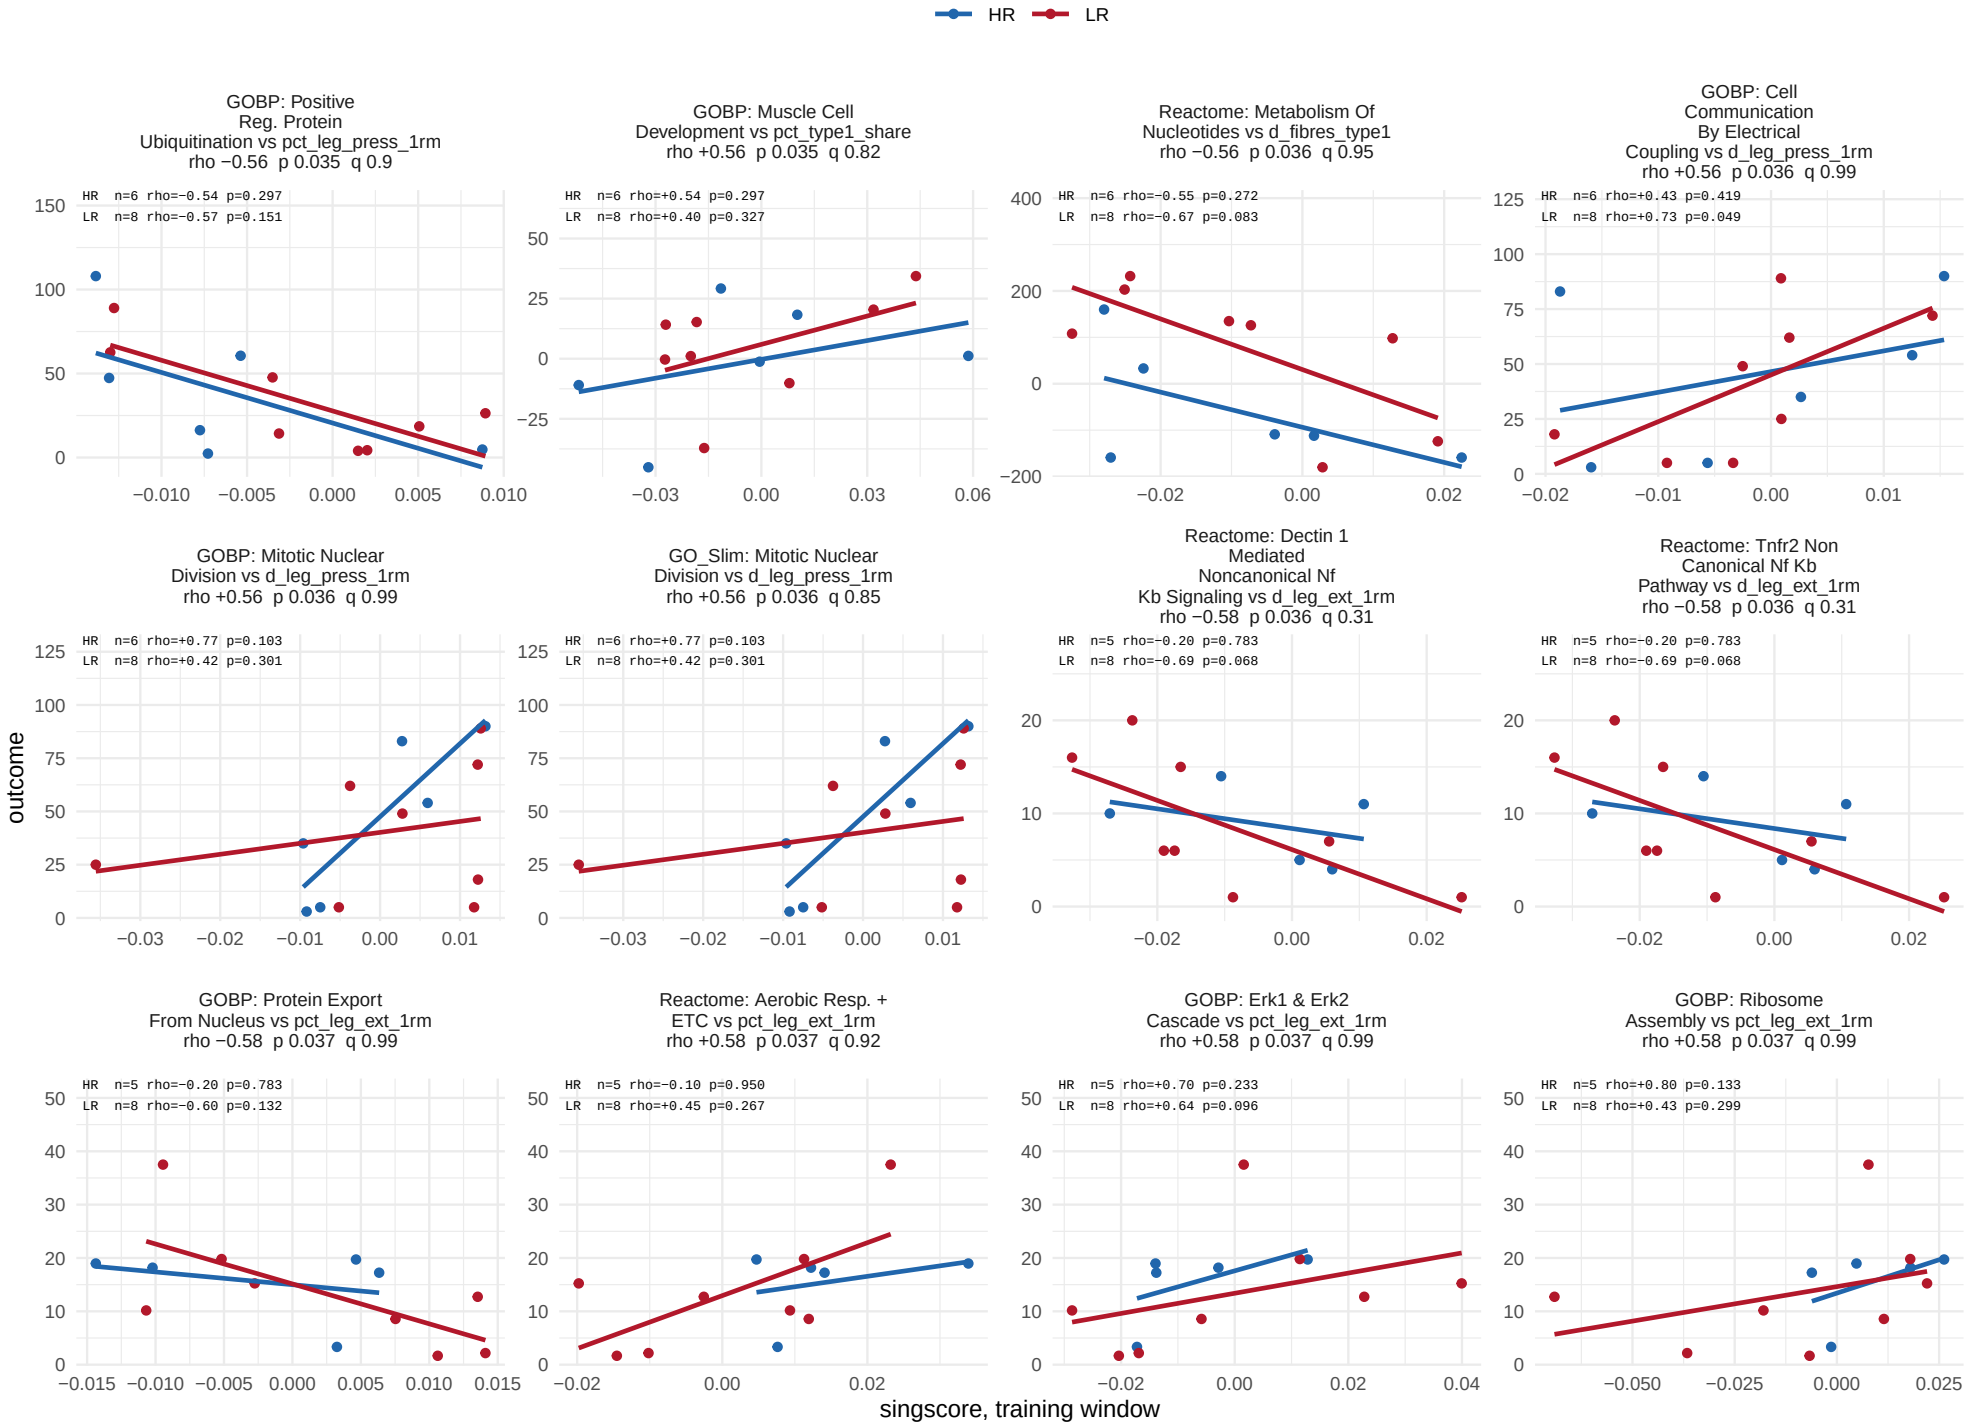

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


923 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

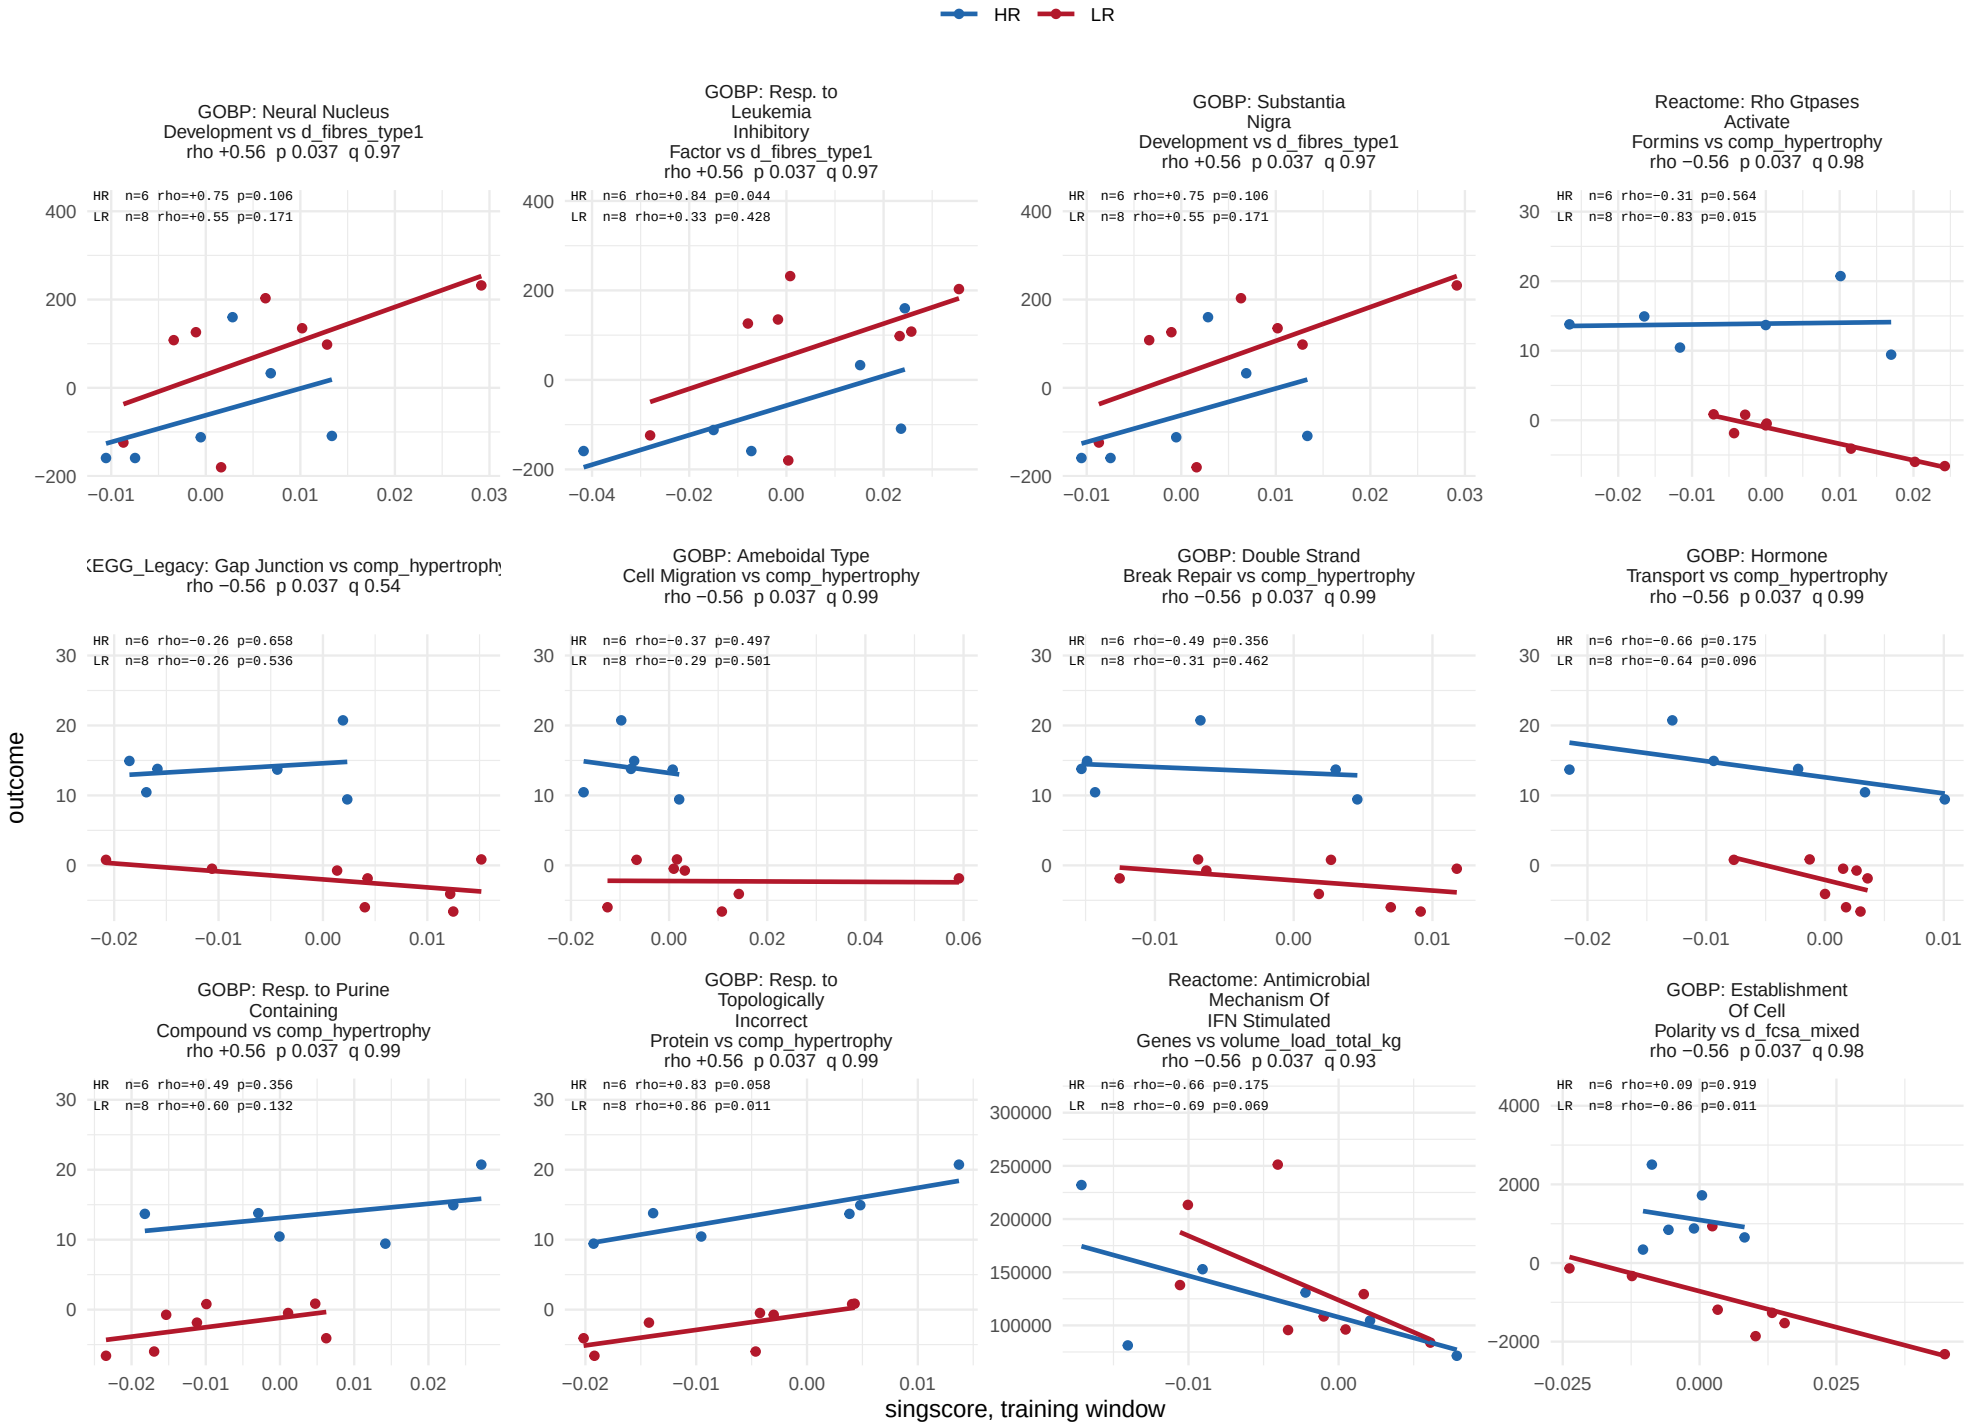

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


923 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

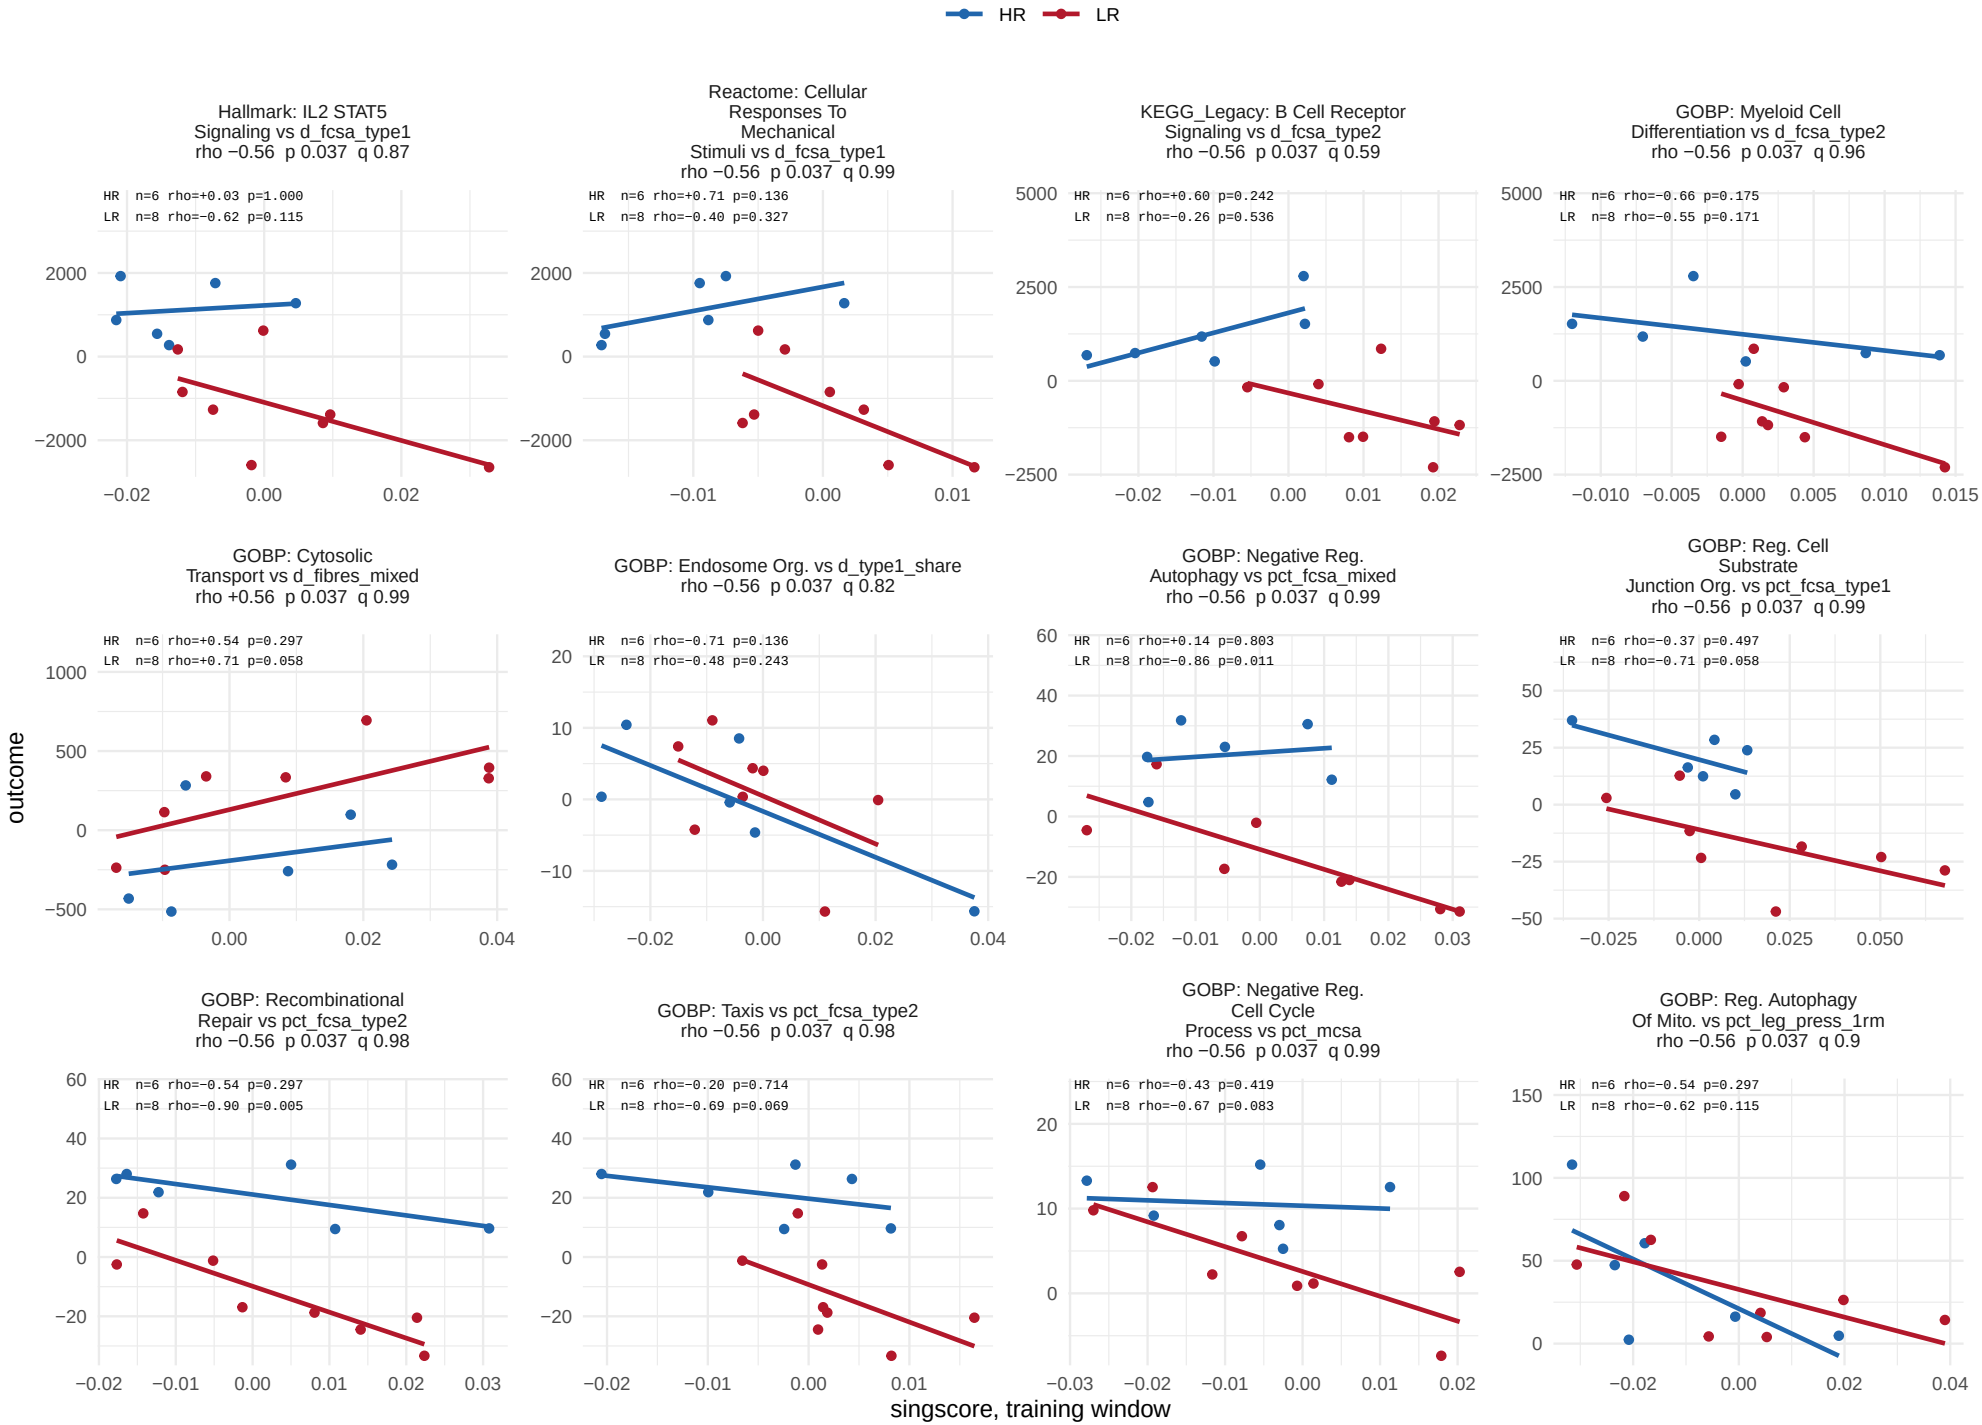

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


923 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

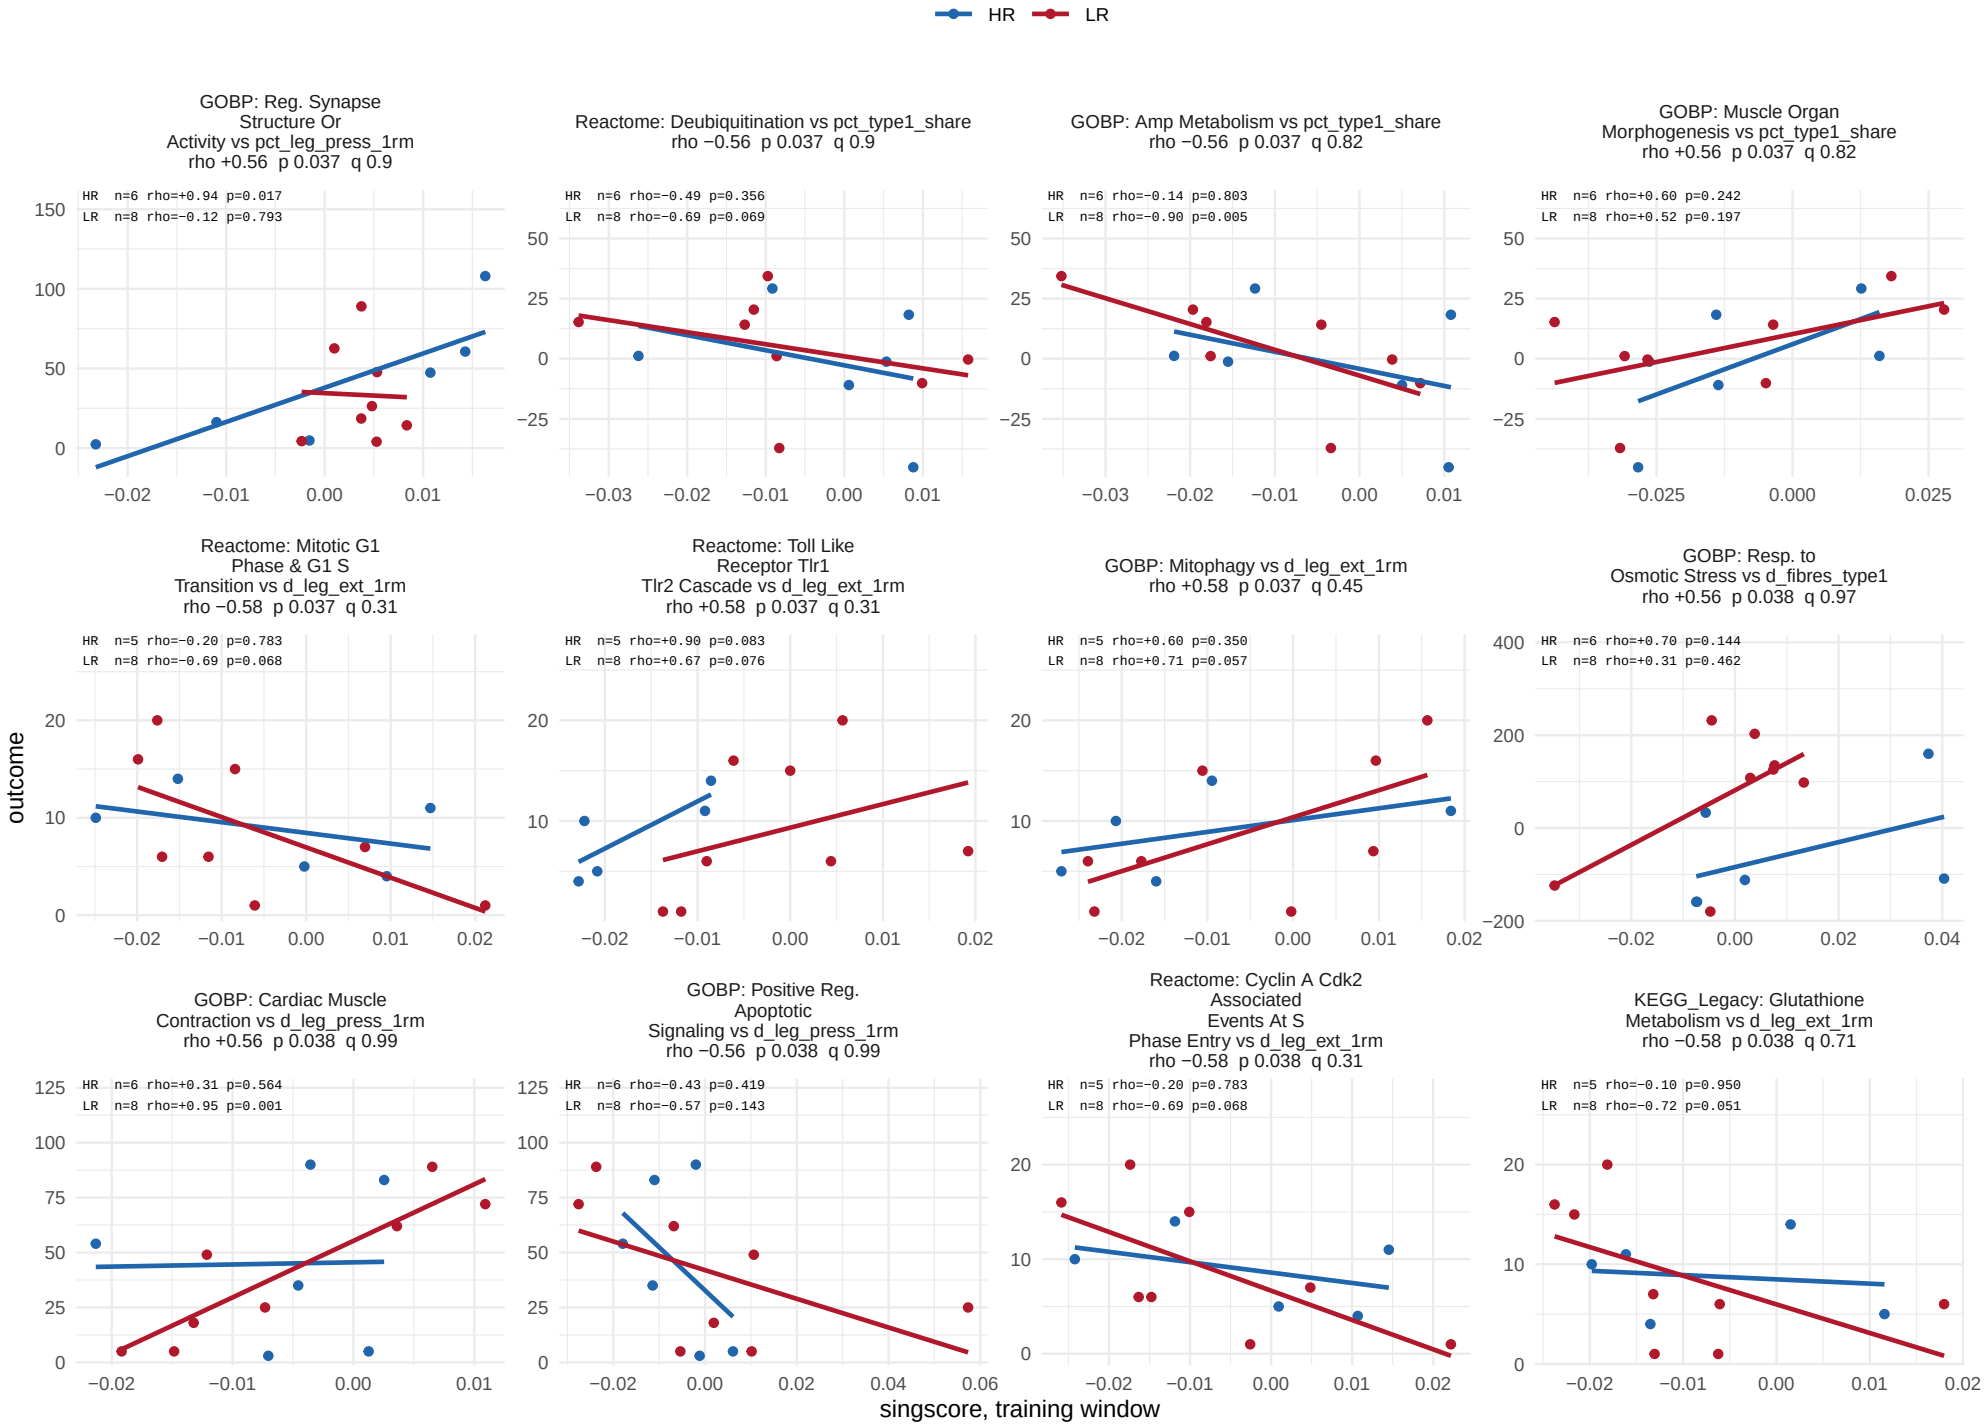

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


923 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

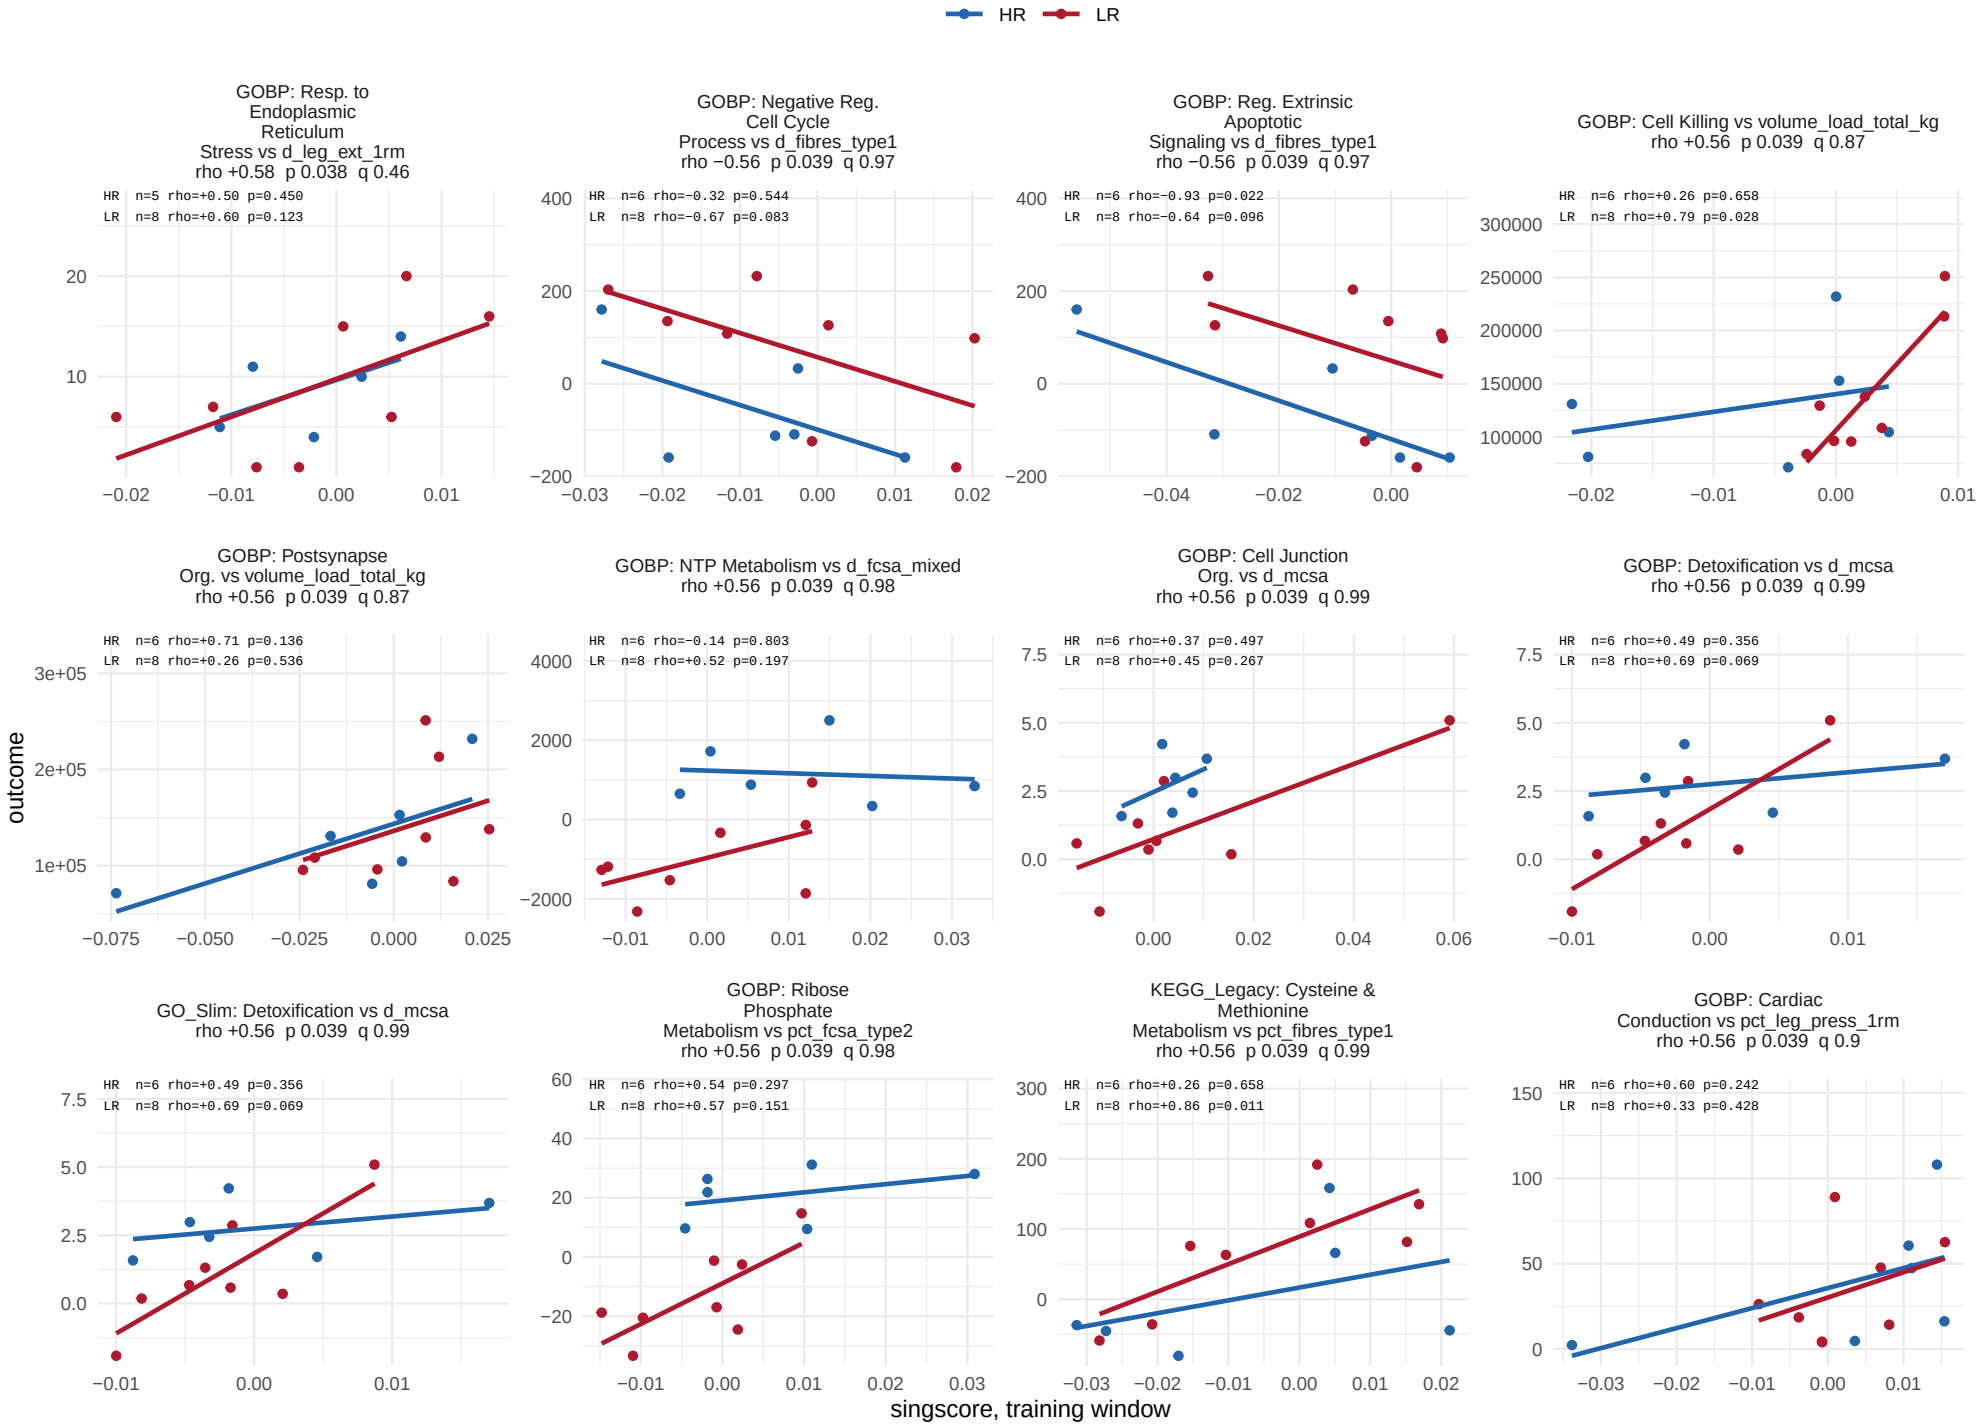

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


923 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

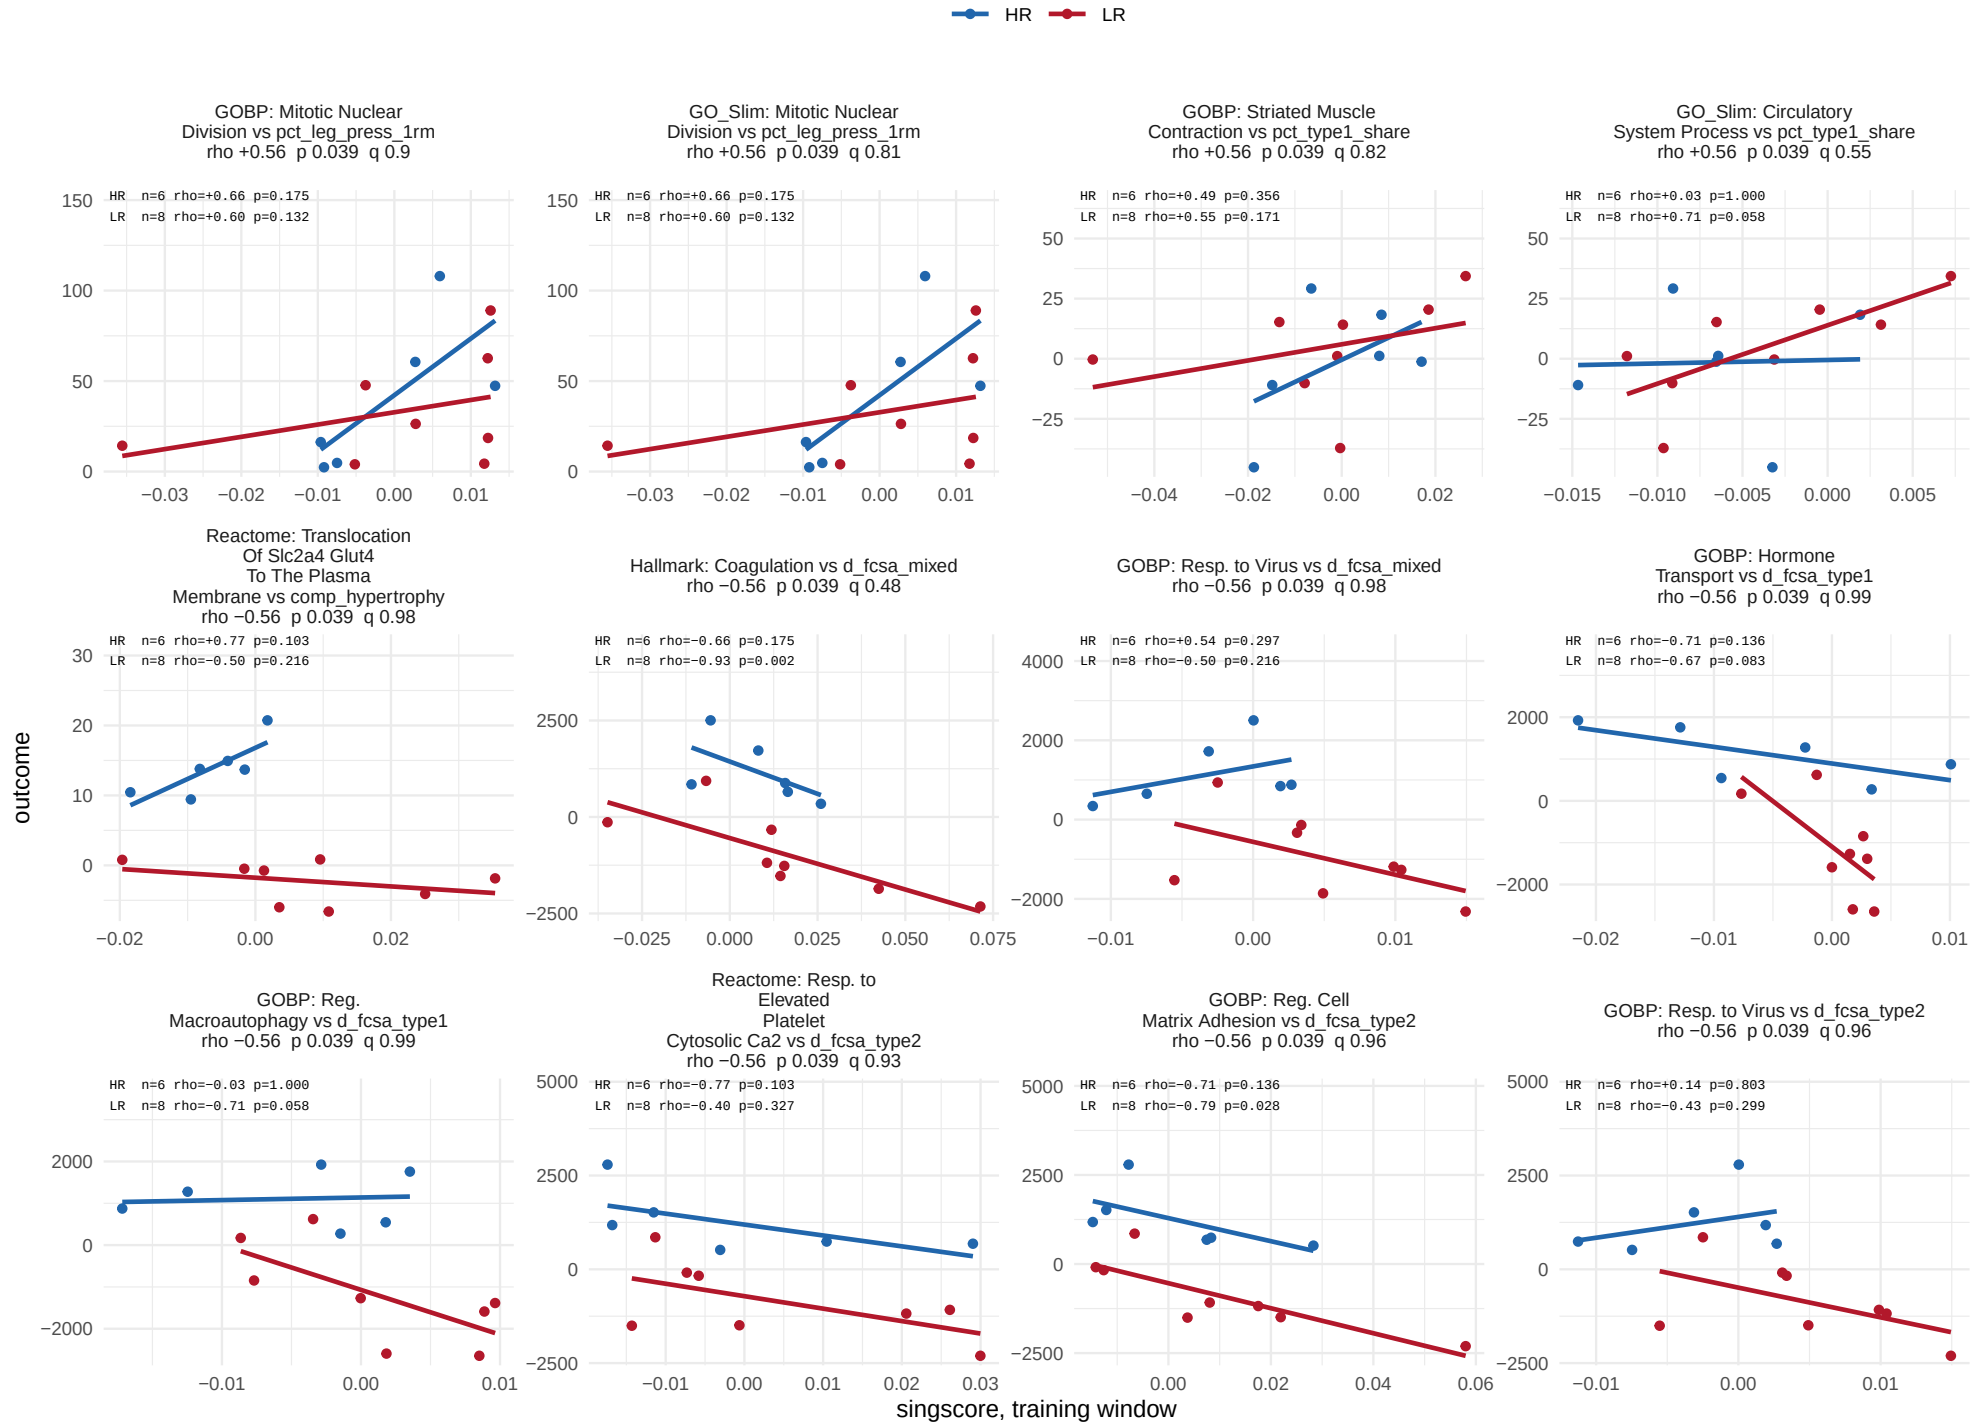

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


923 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

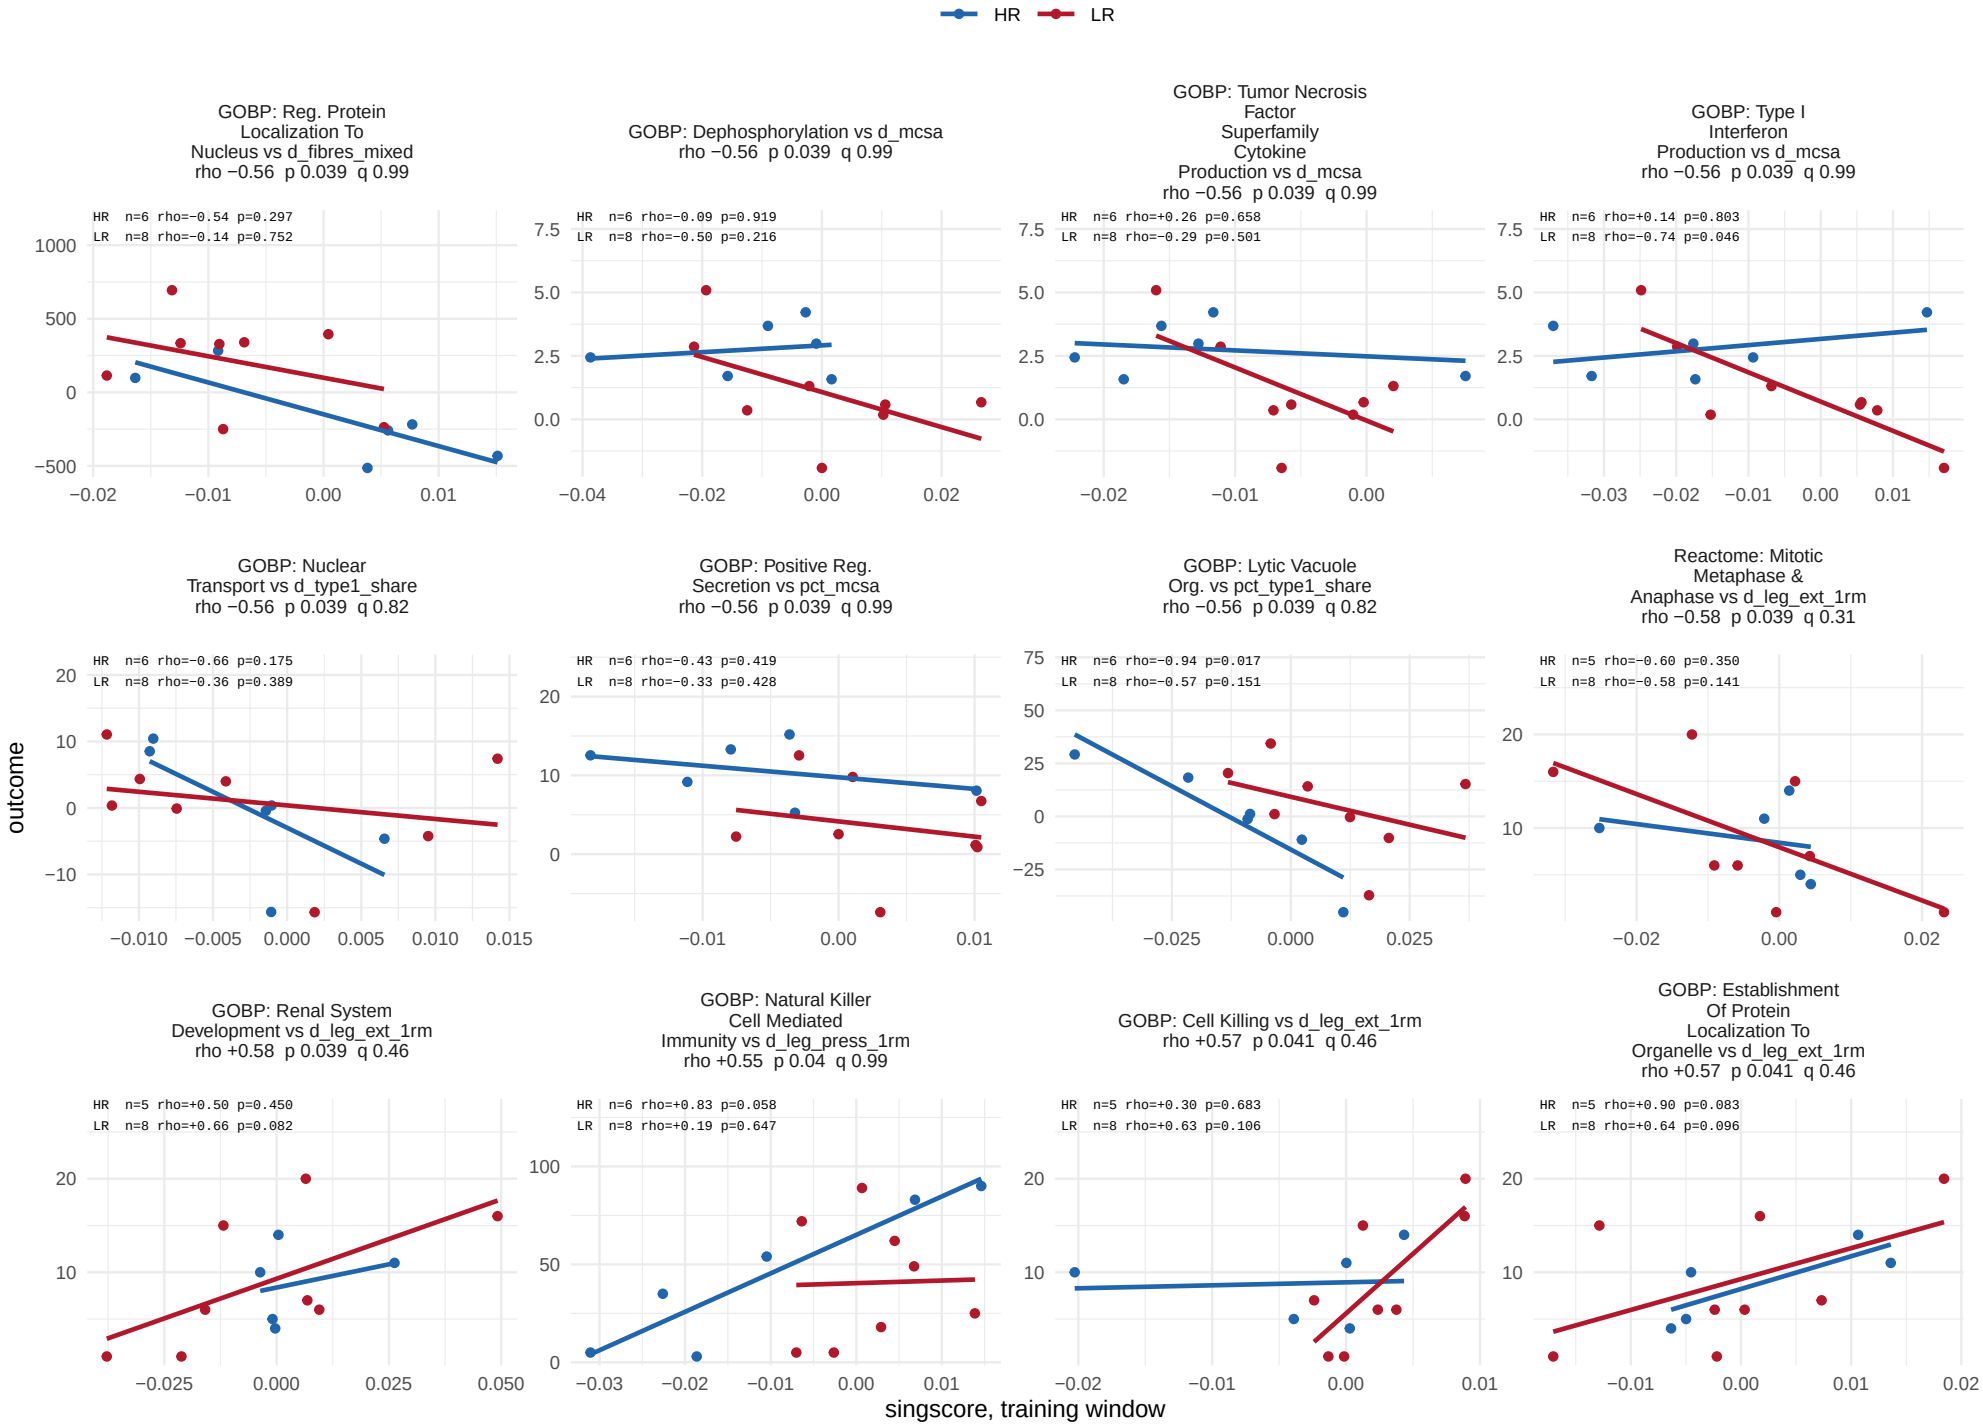

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


923 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

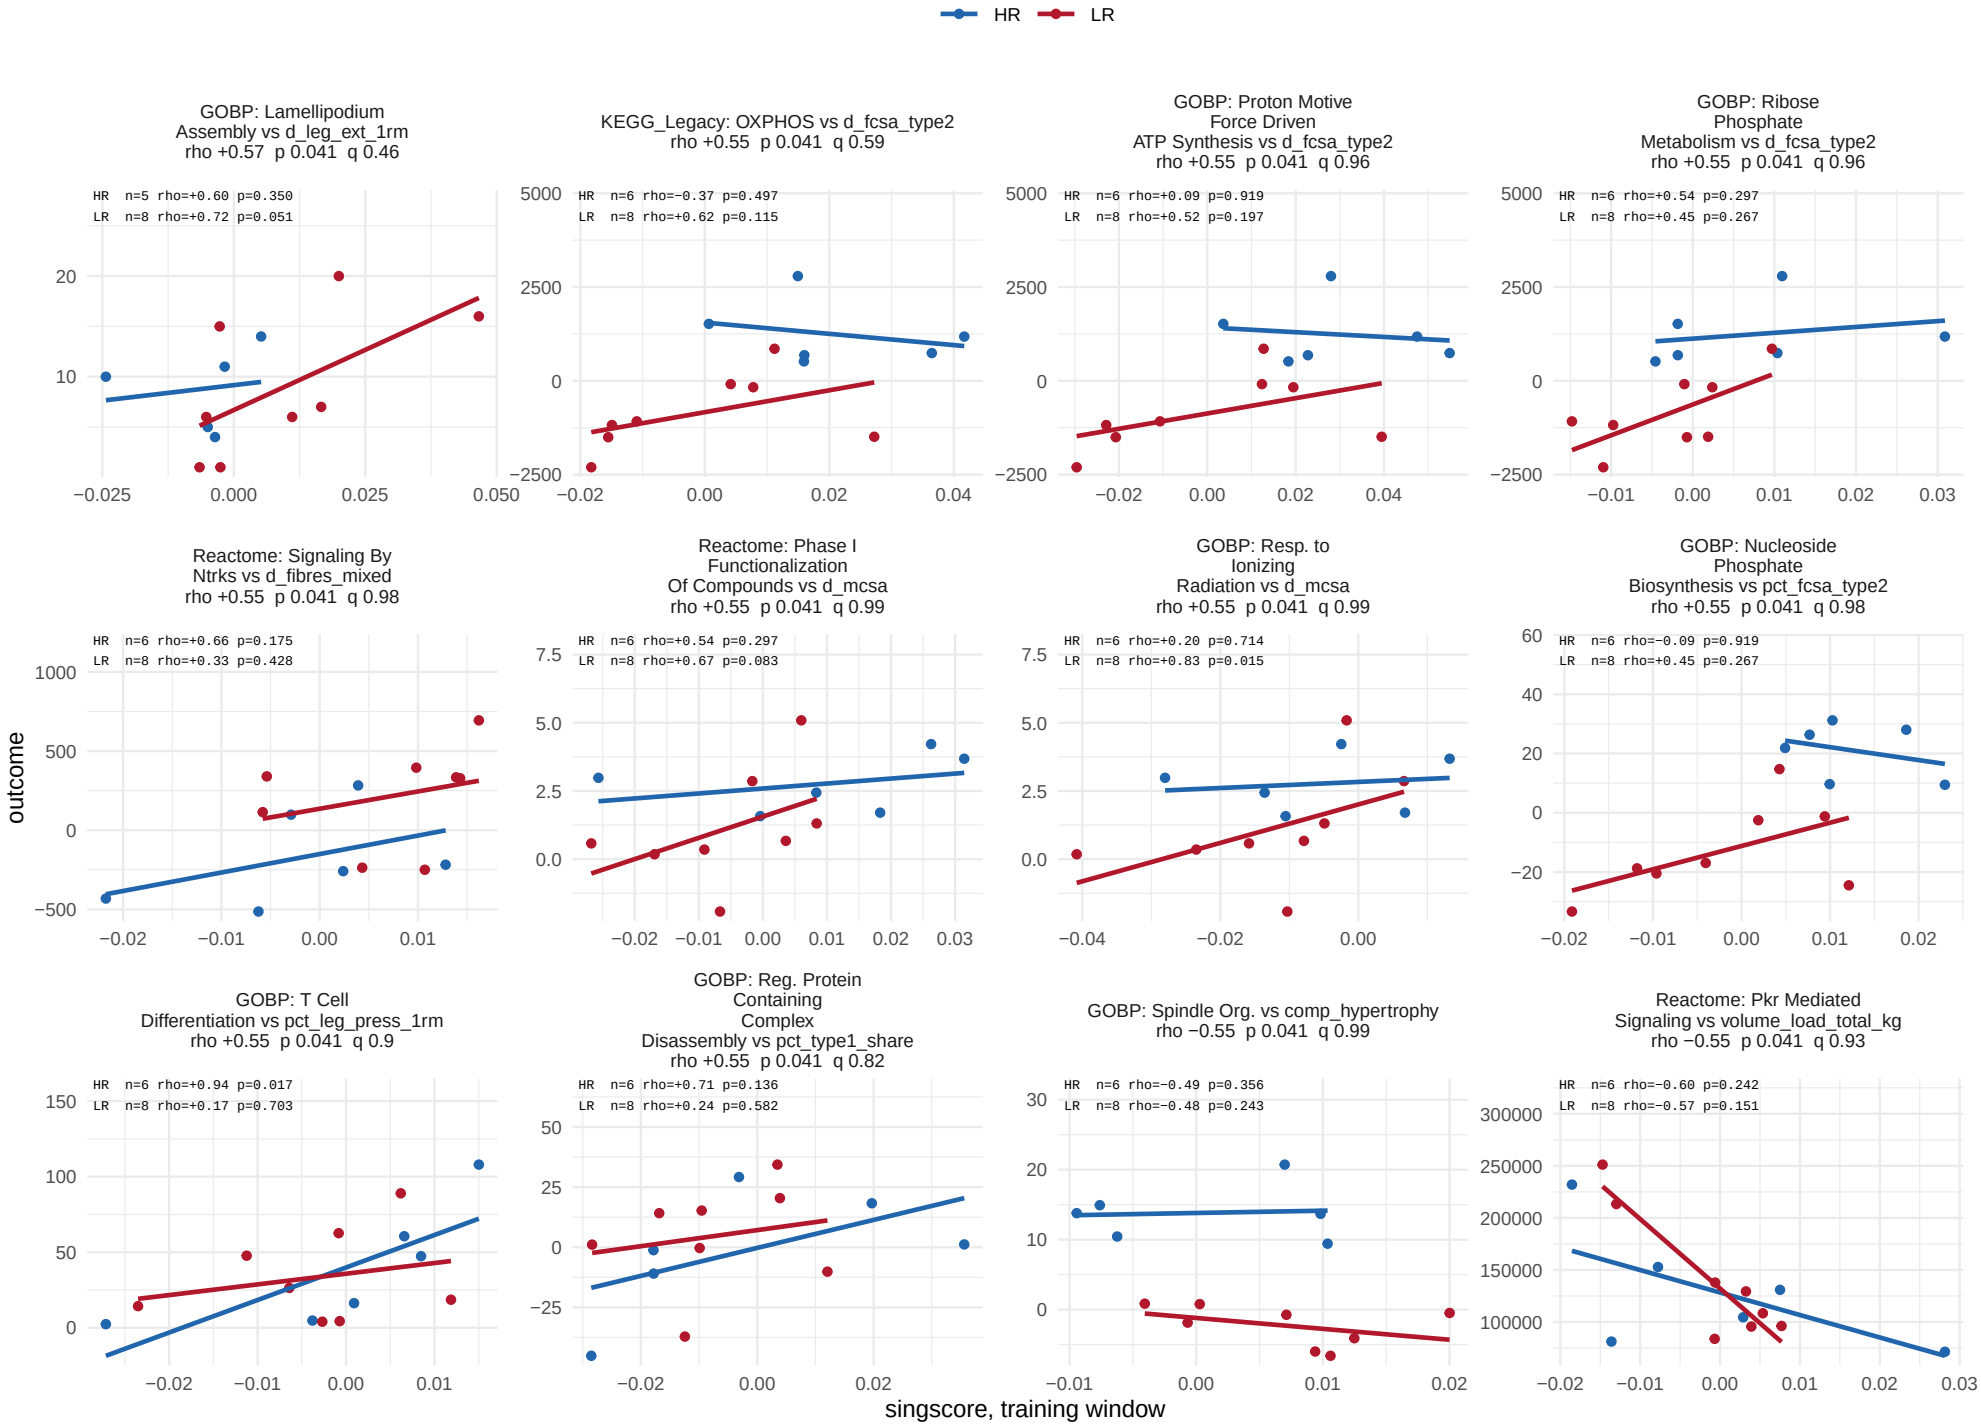

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


923 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

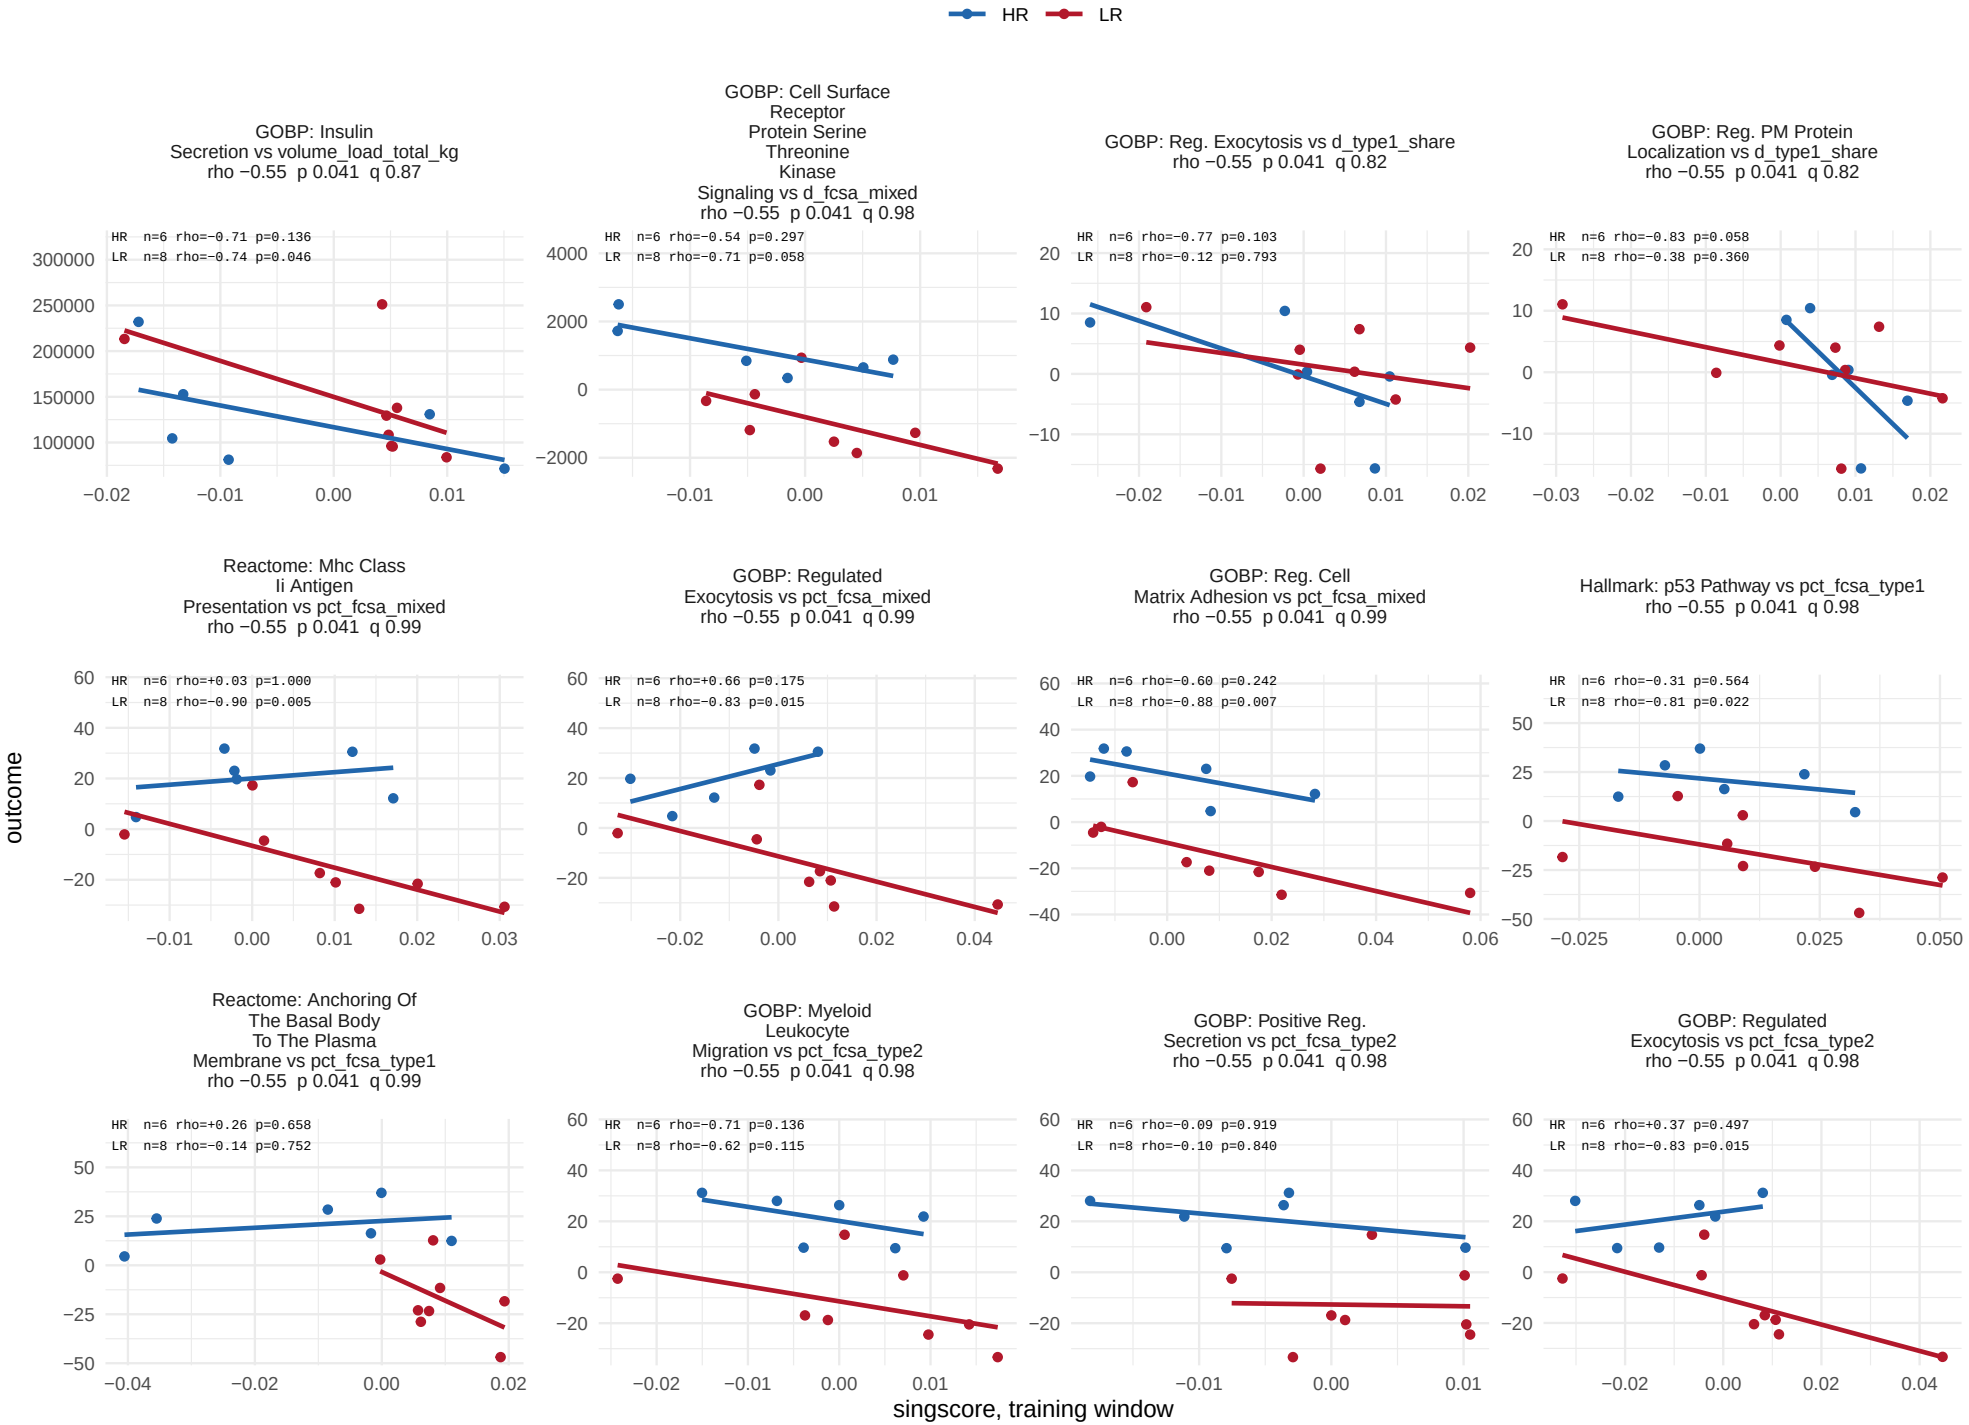

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


923 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

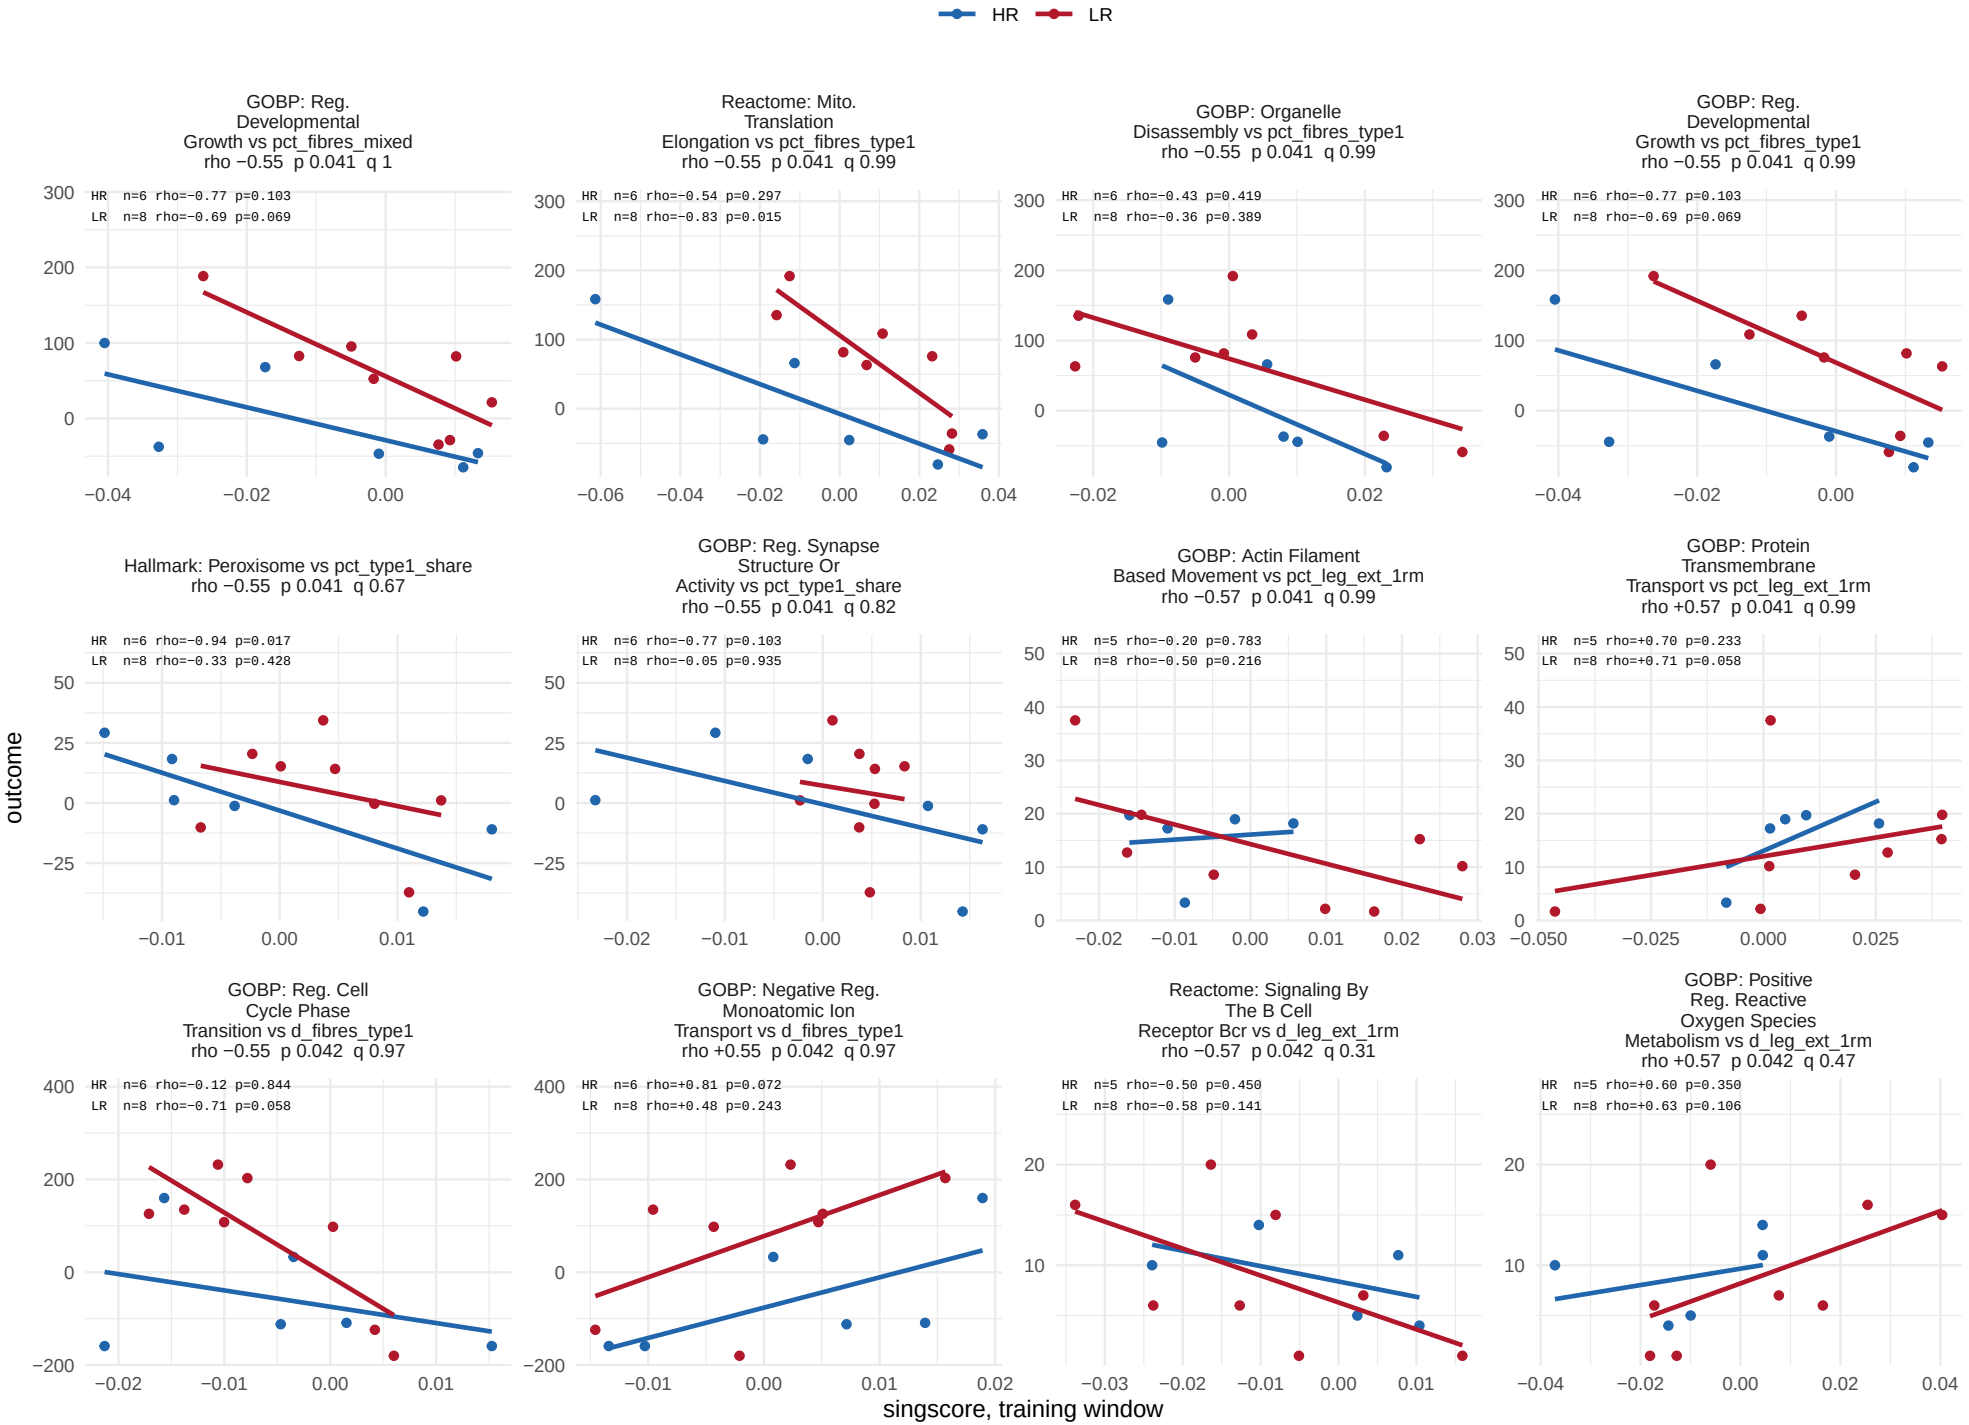

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


923 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

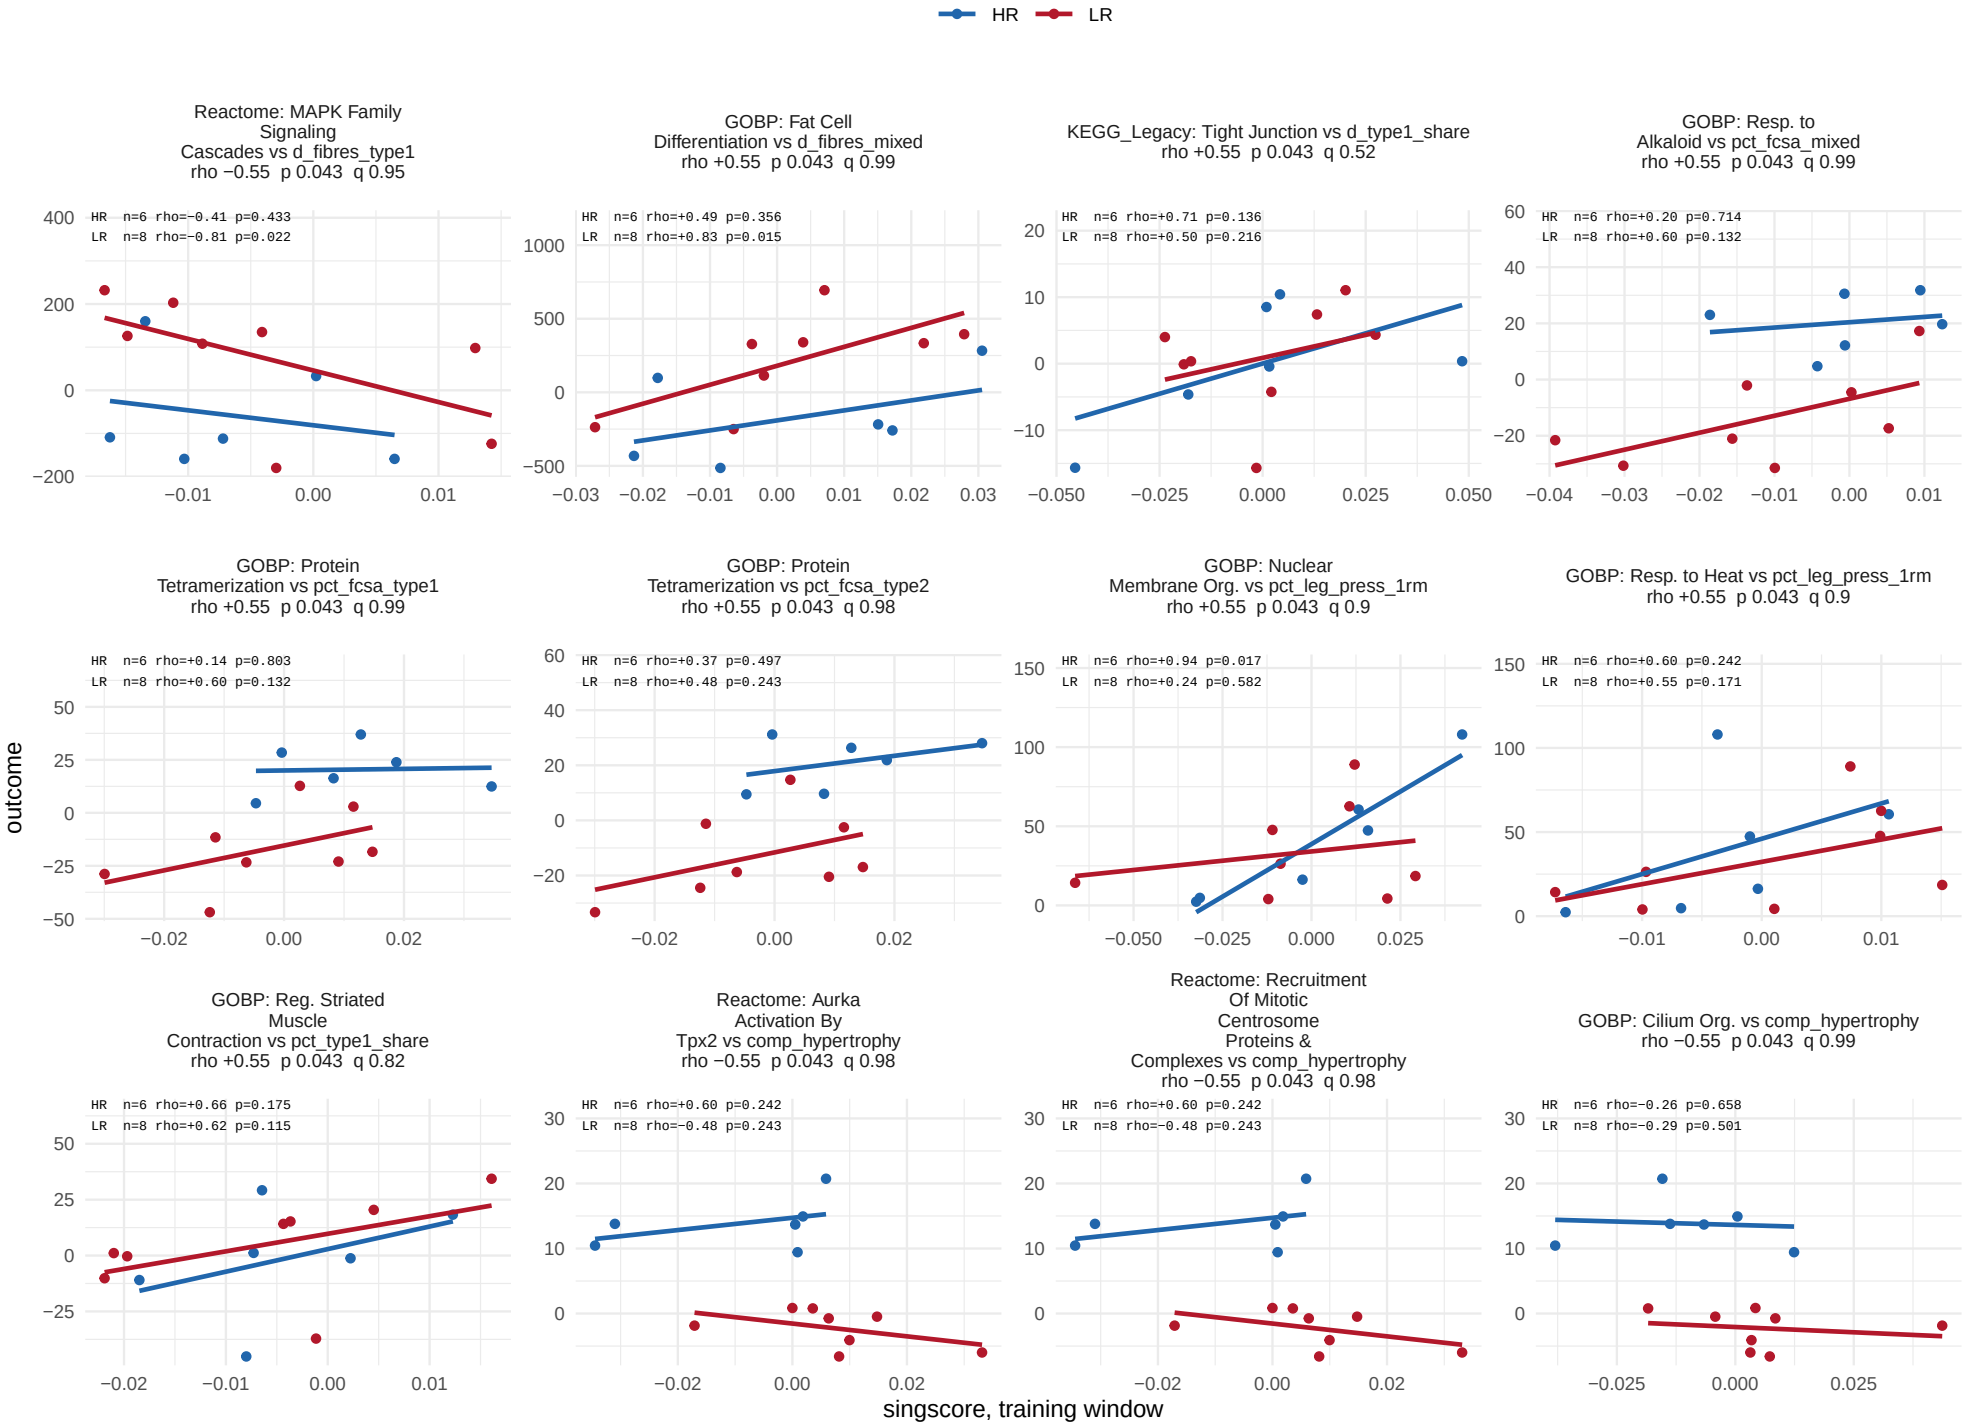

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


923 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

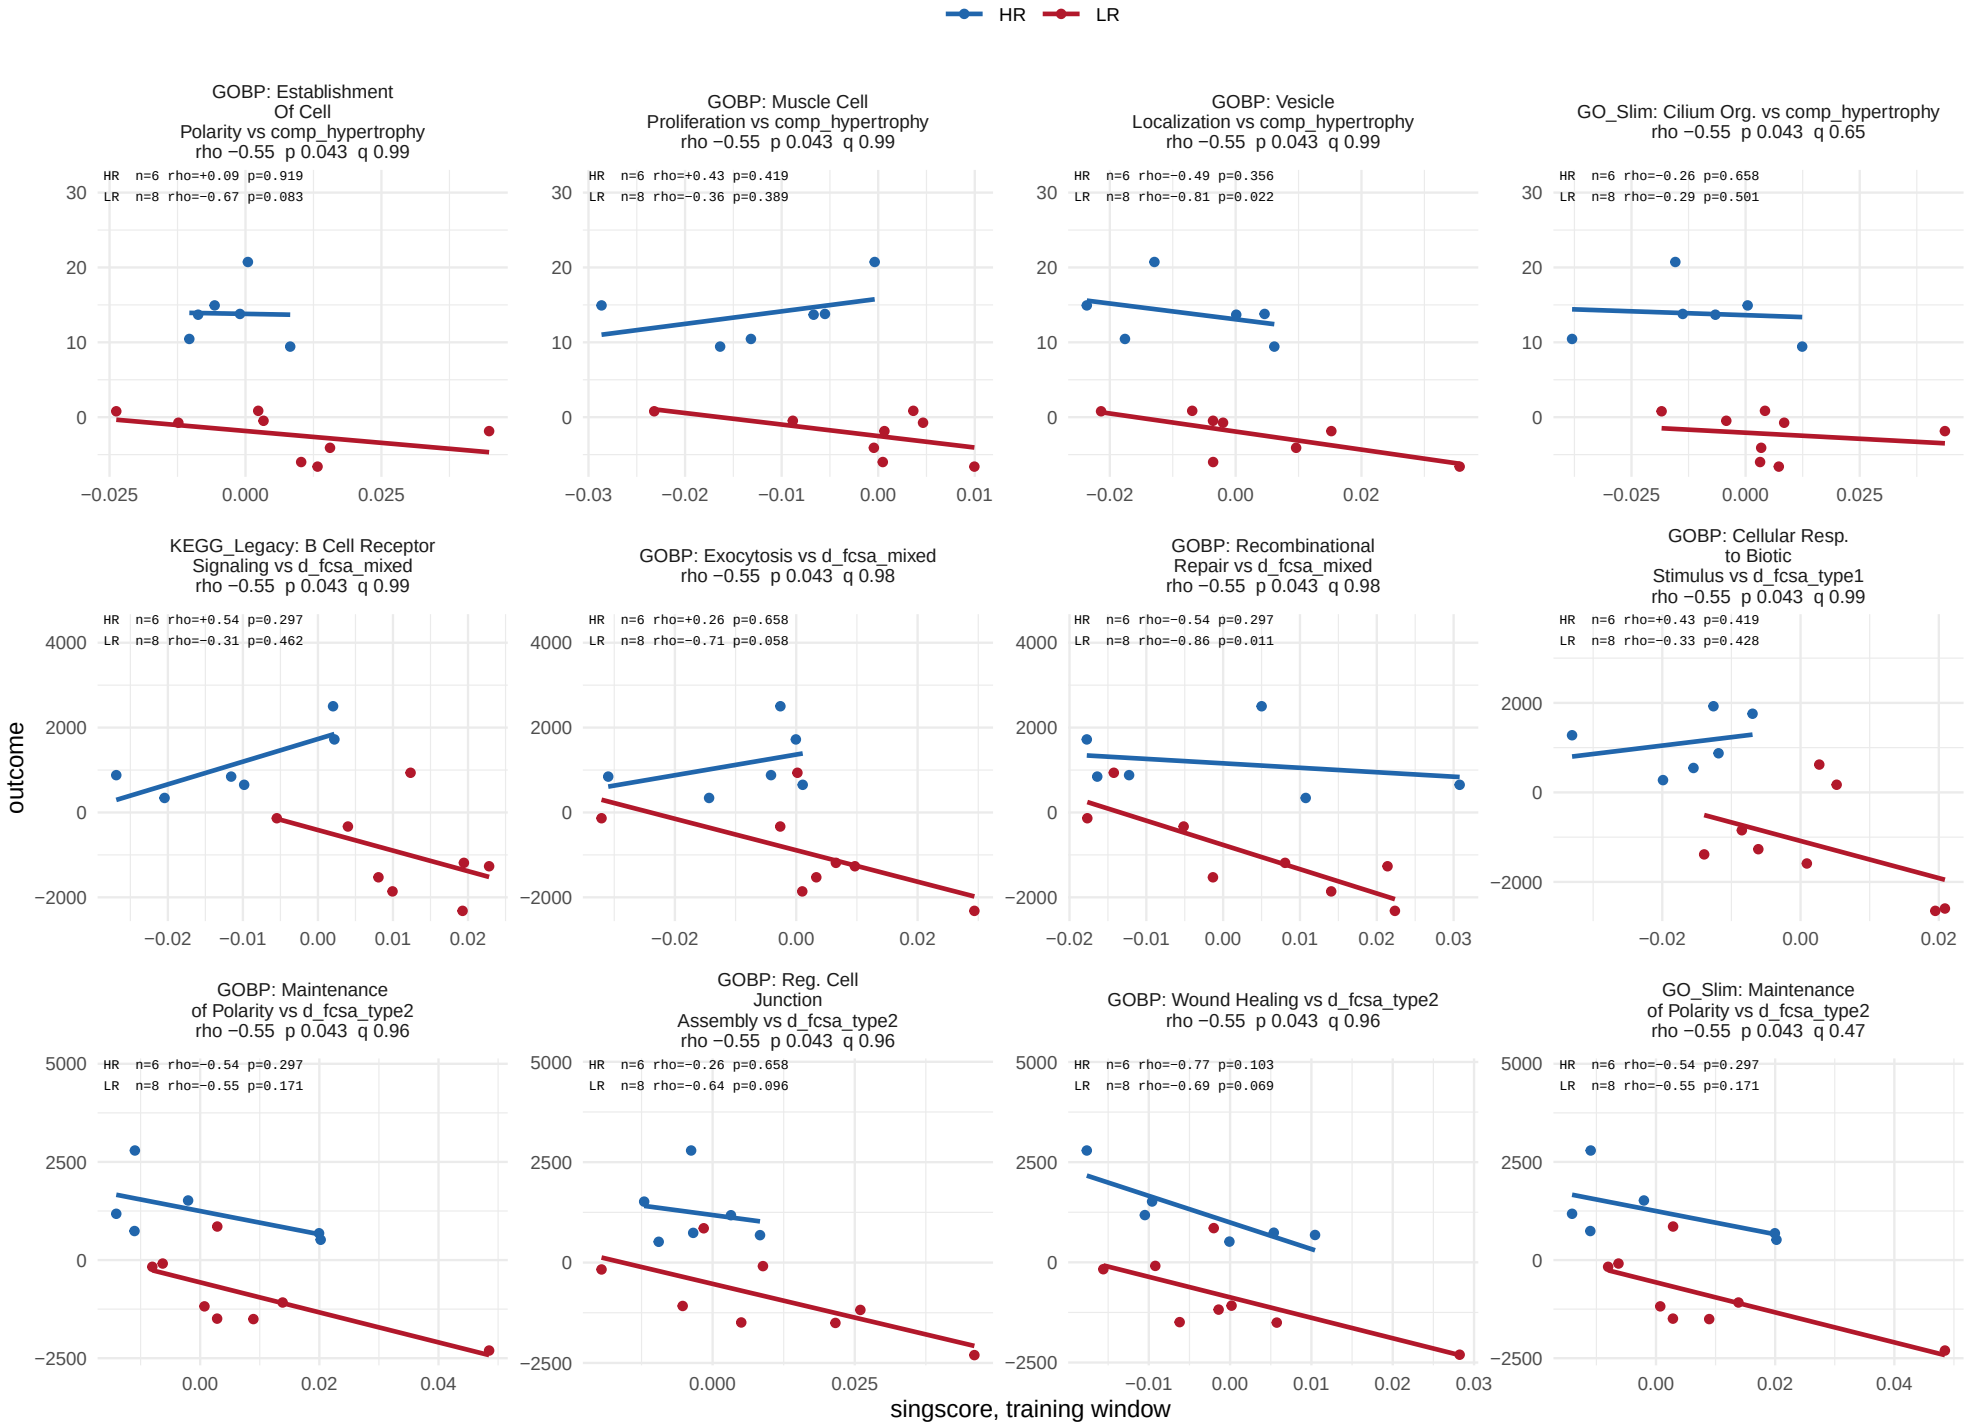

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


923 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

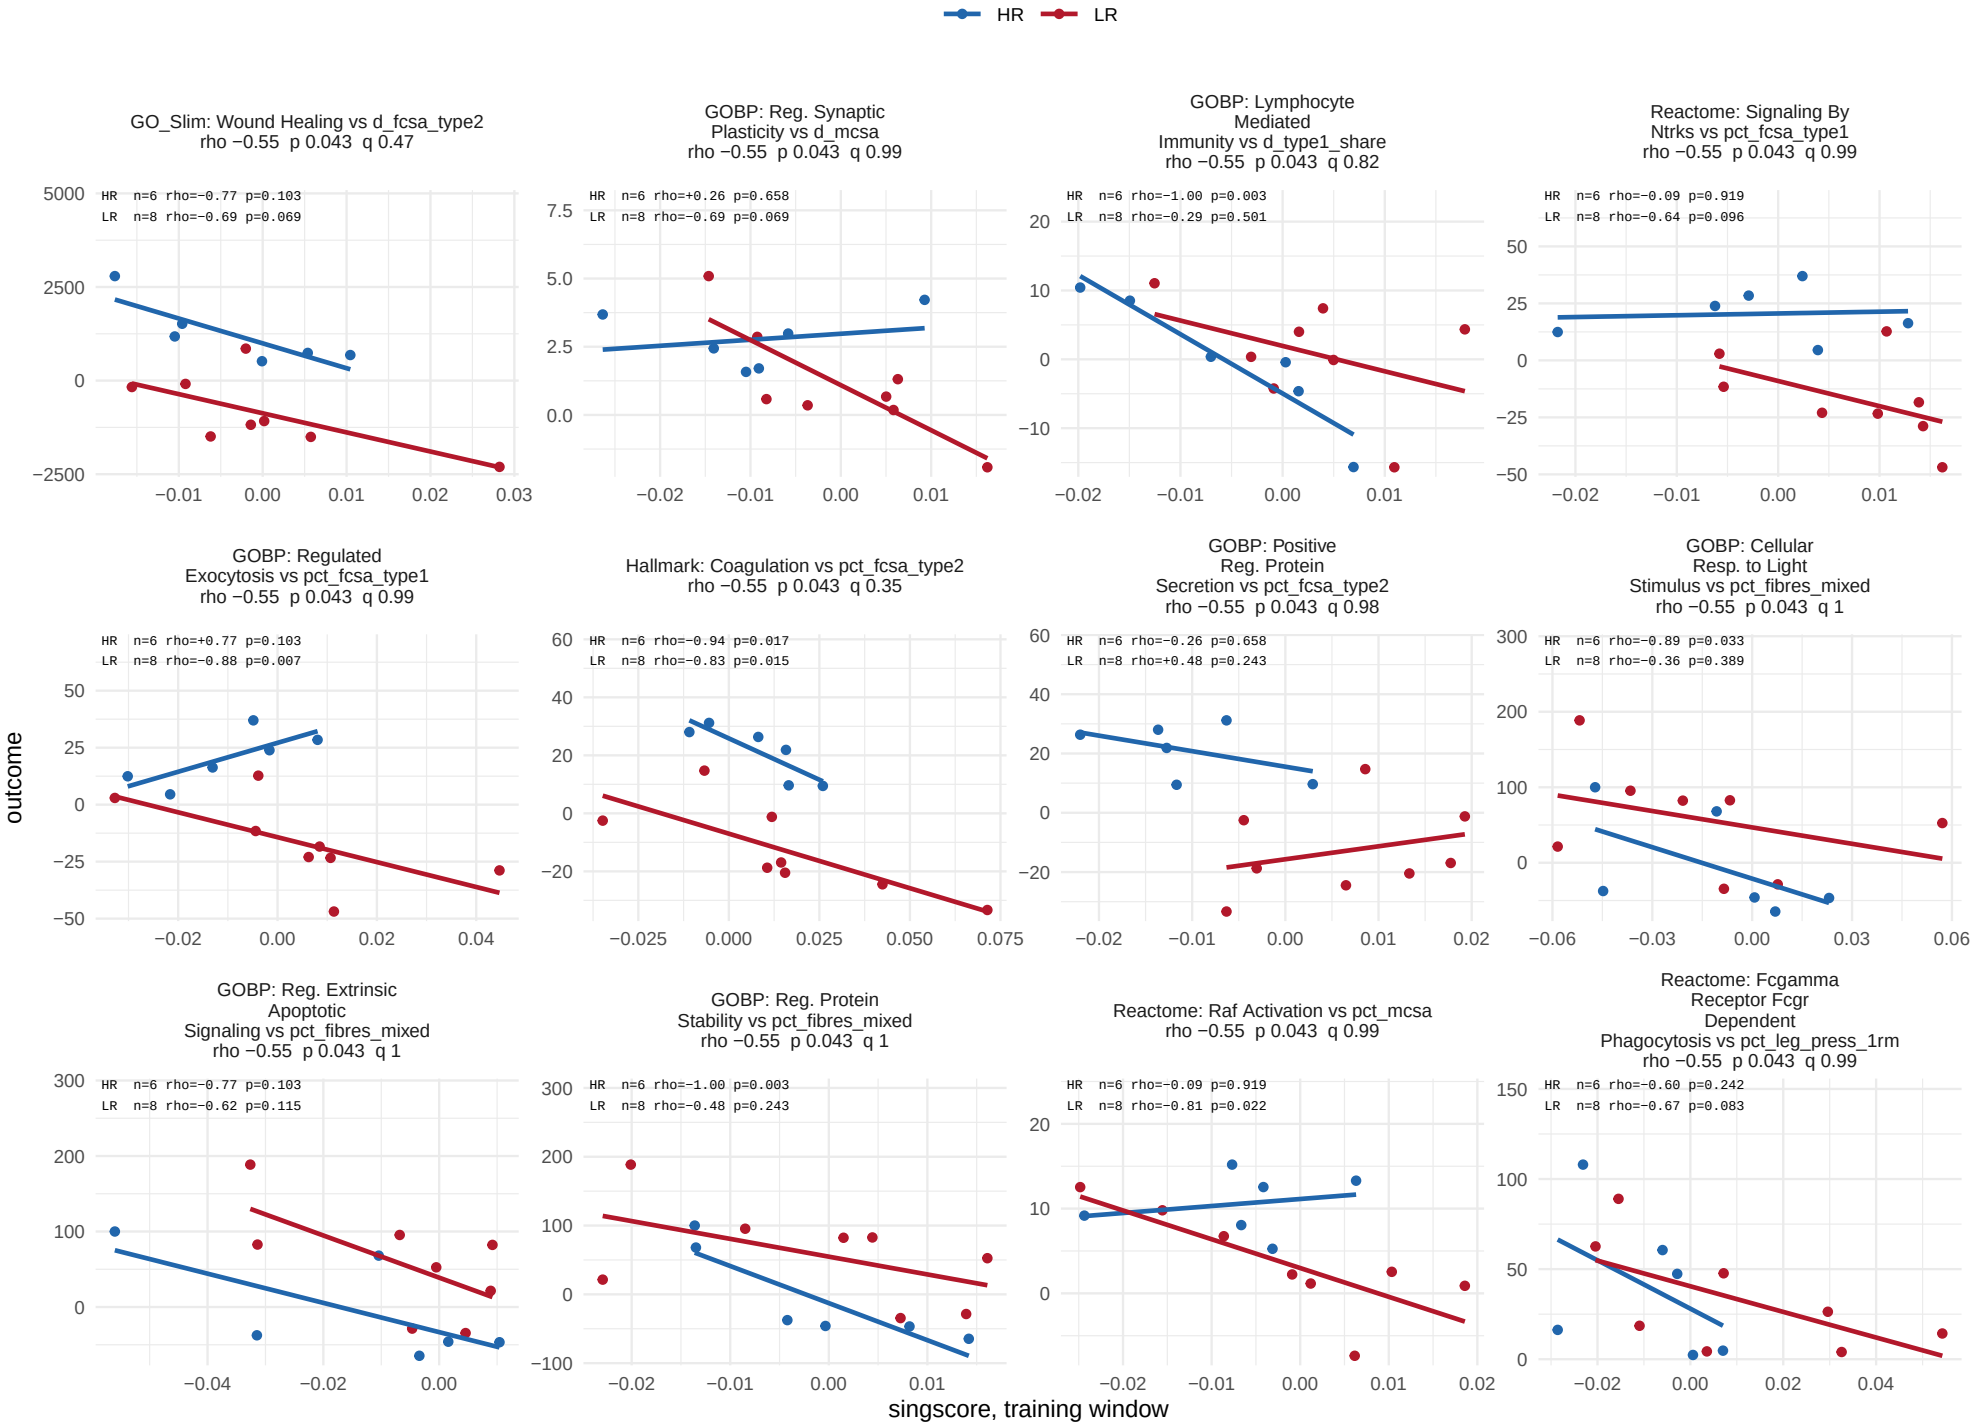

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


923 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

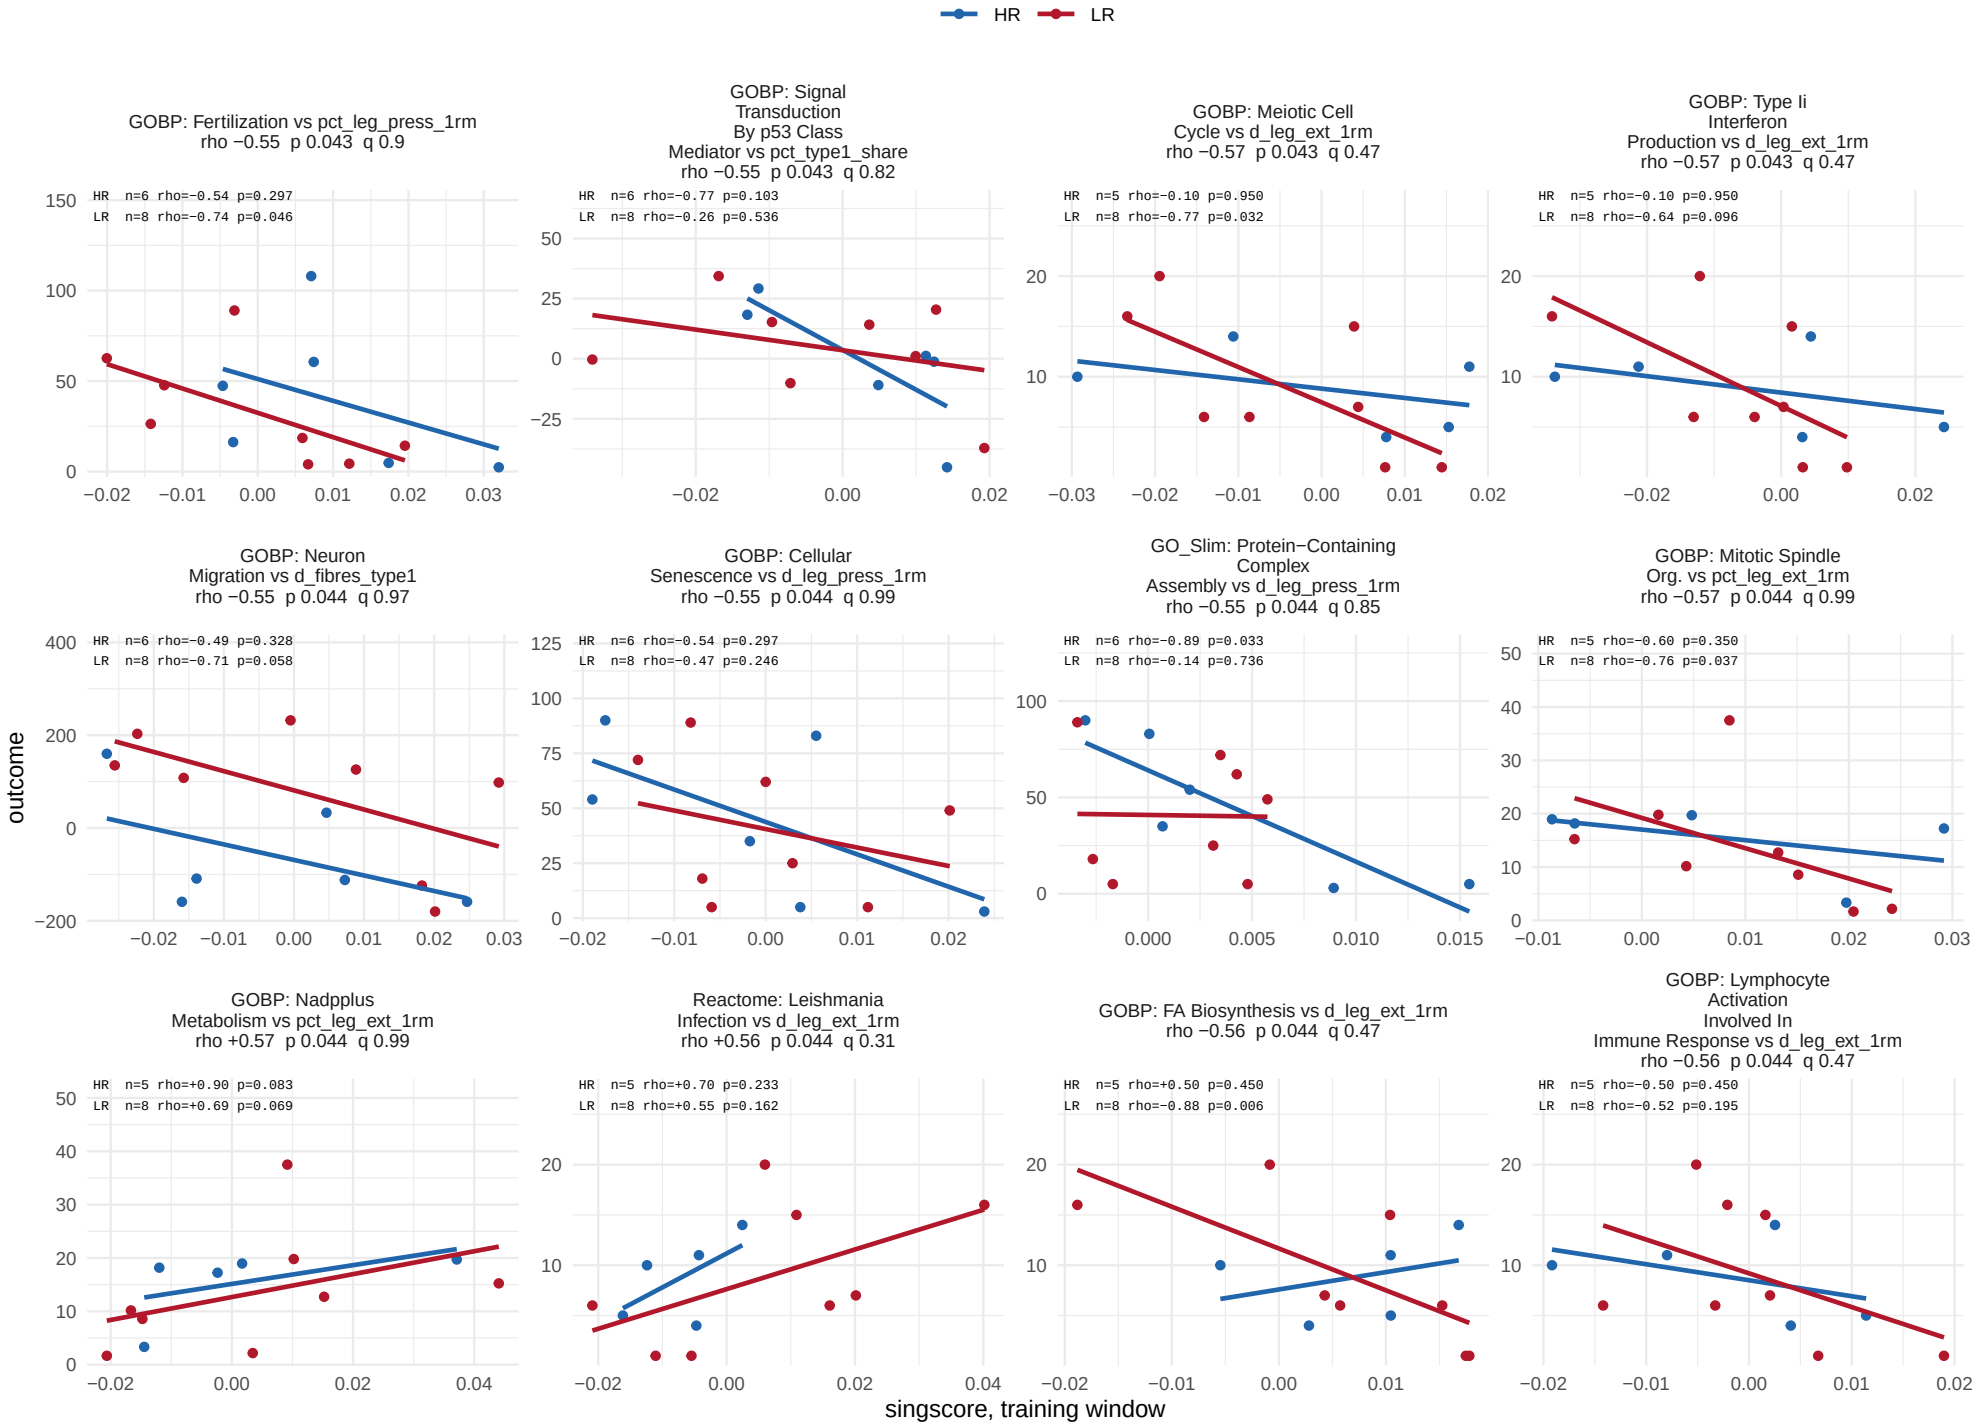

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


923 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

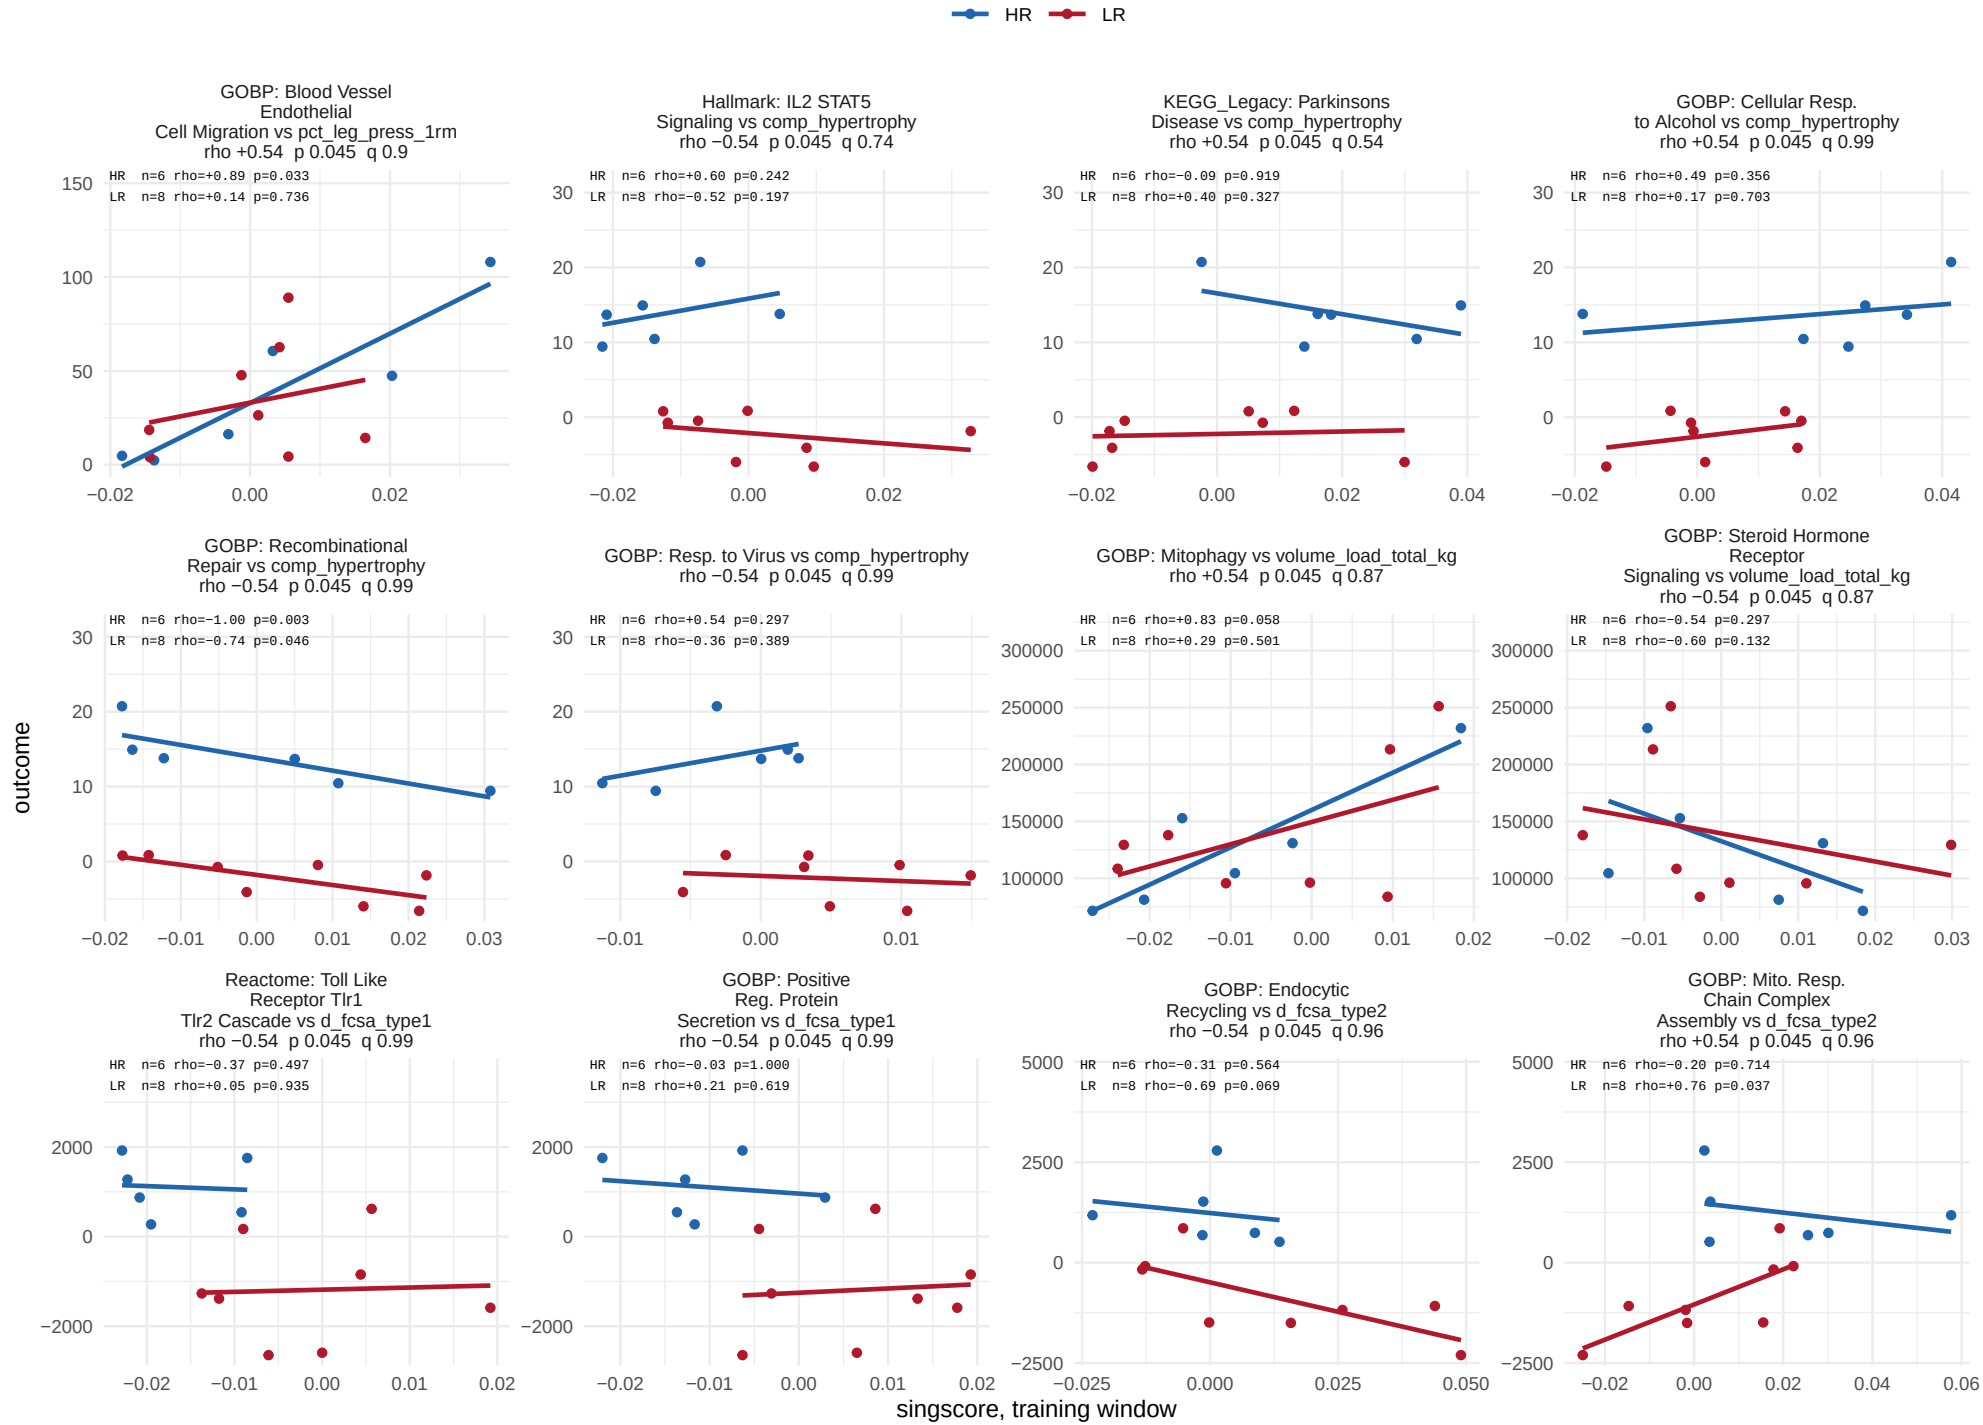

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


923 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

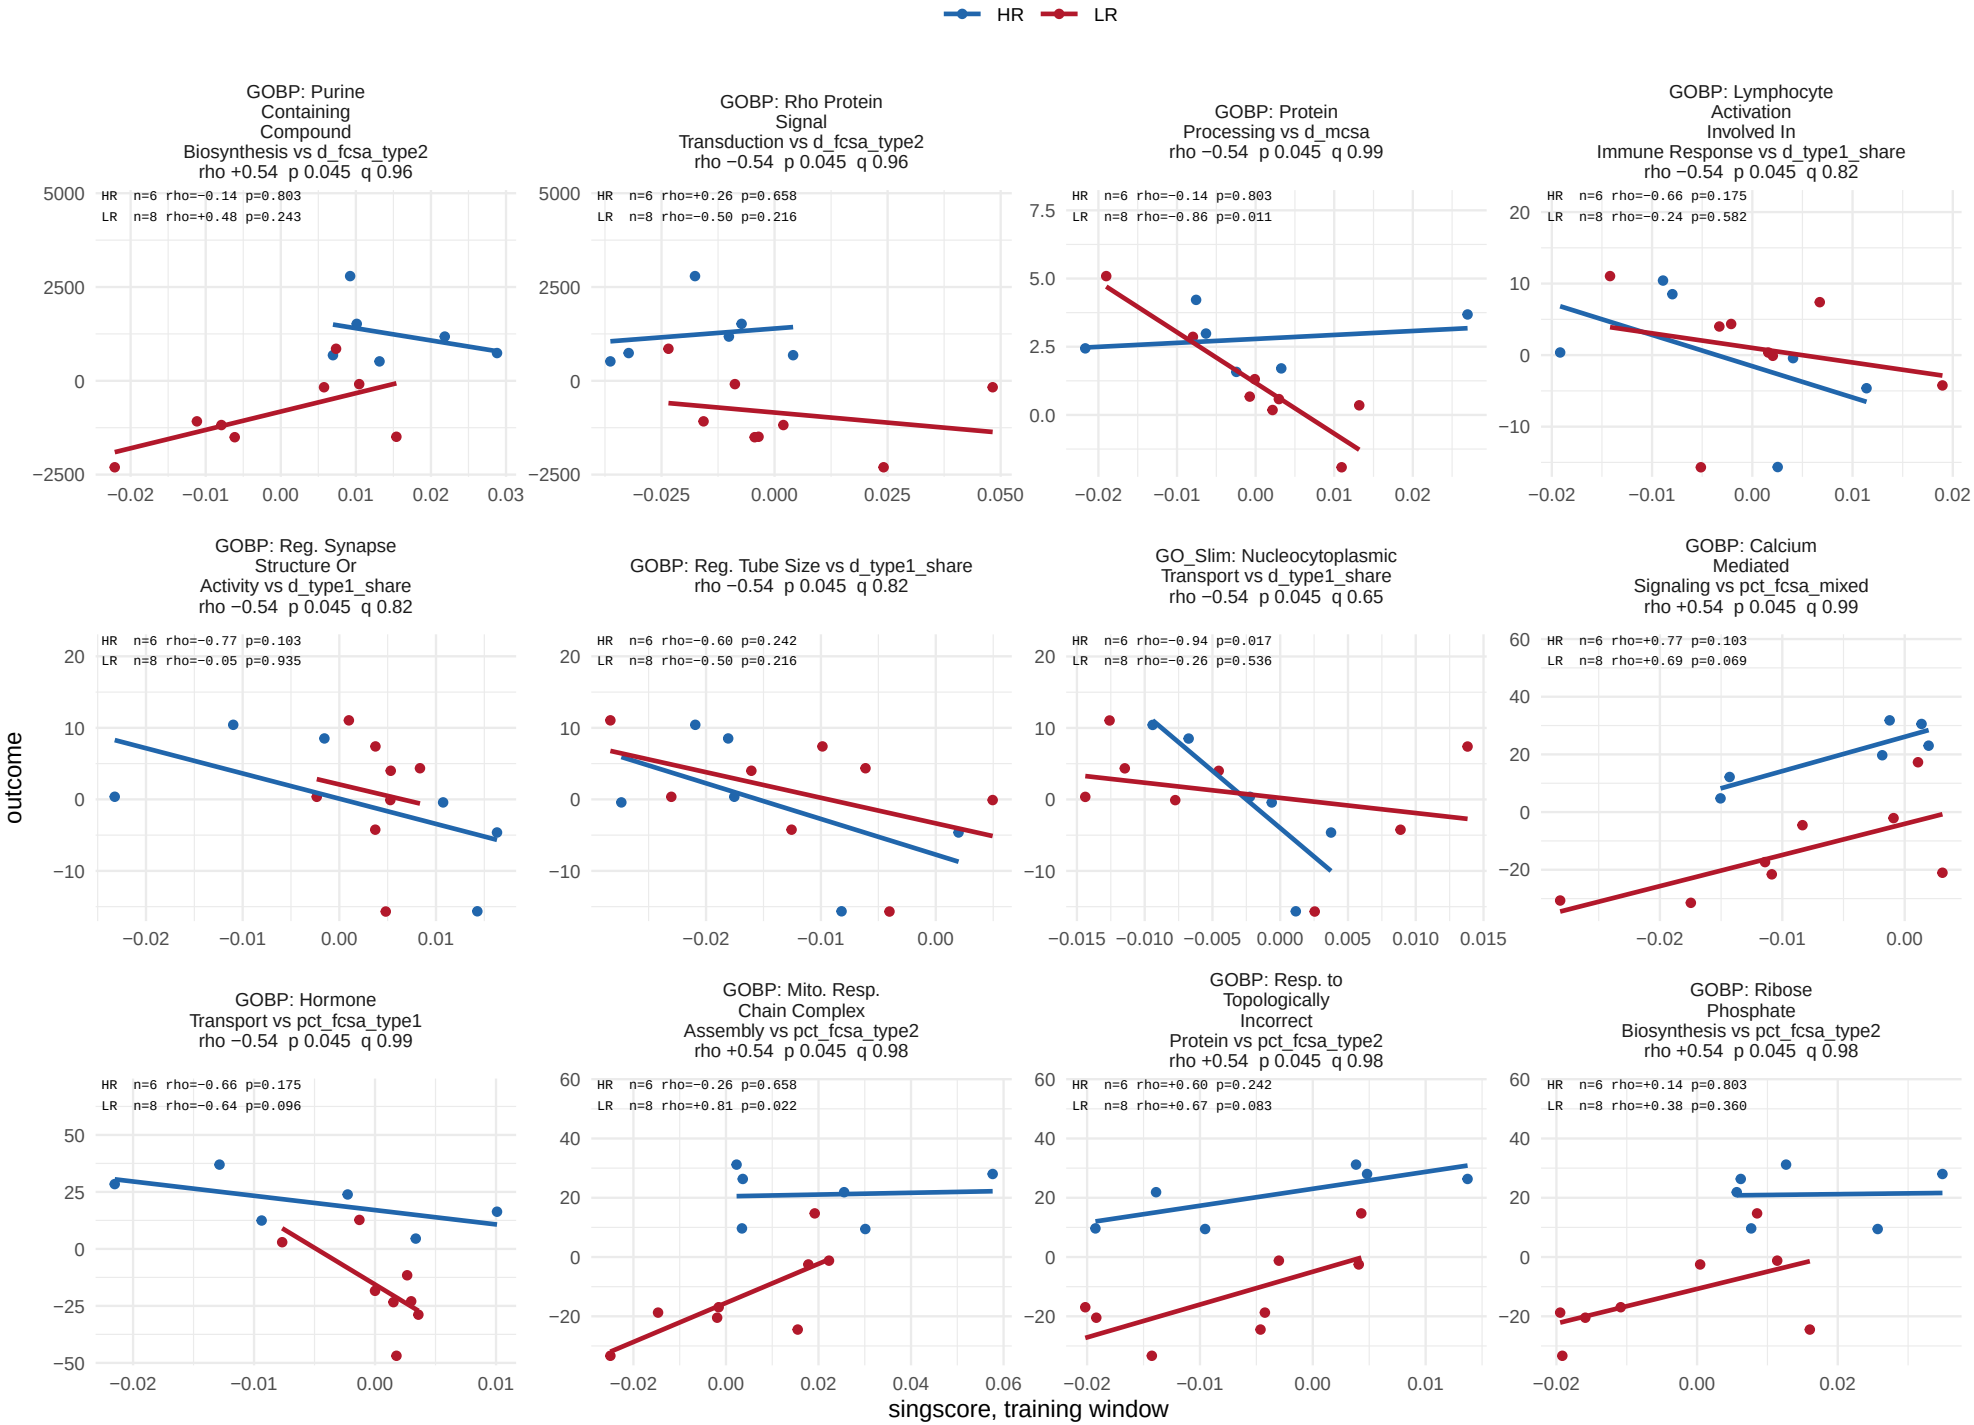

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


923 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

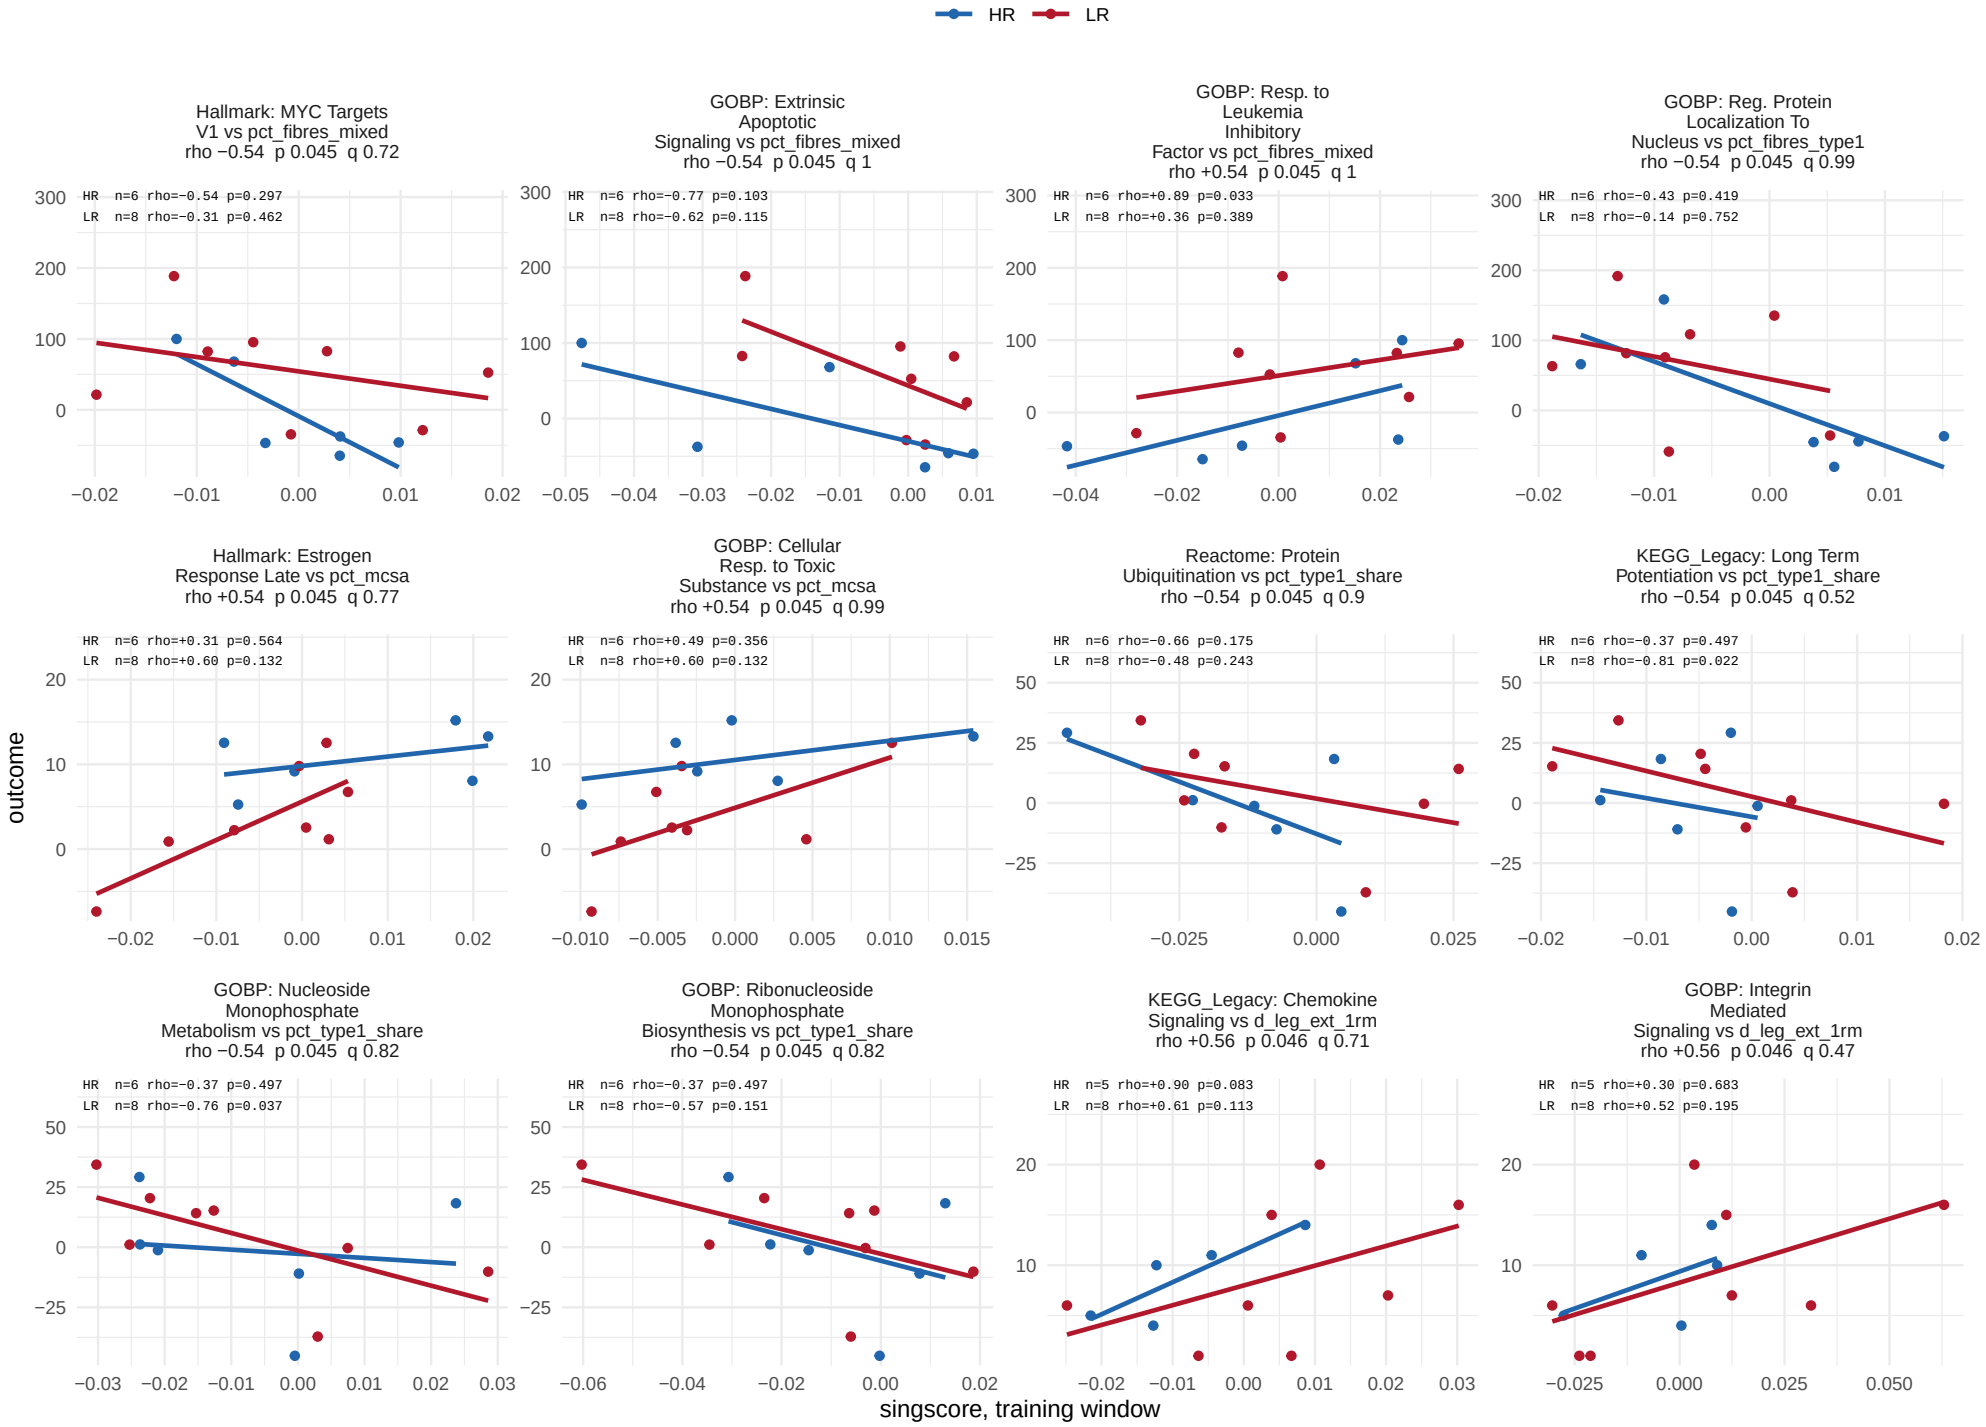

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


923 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

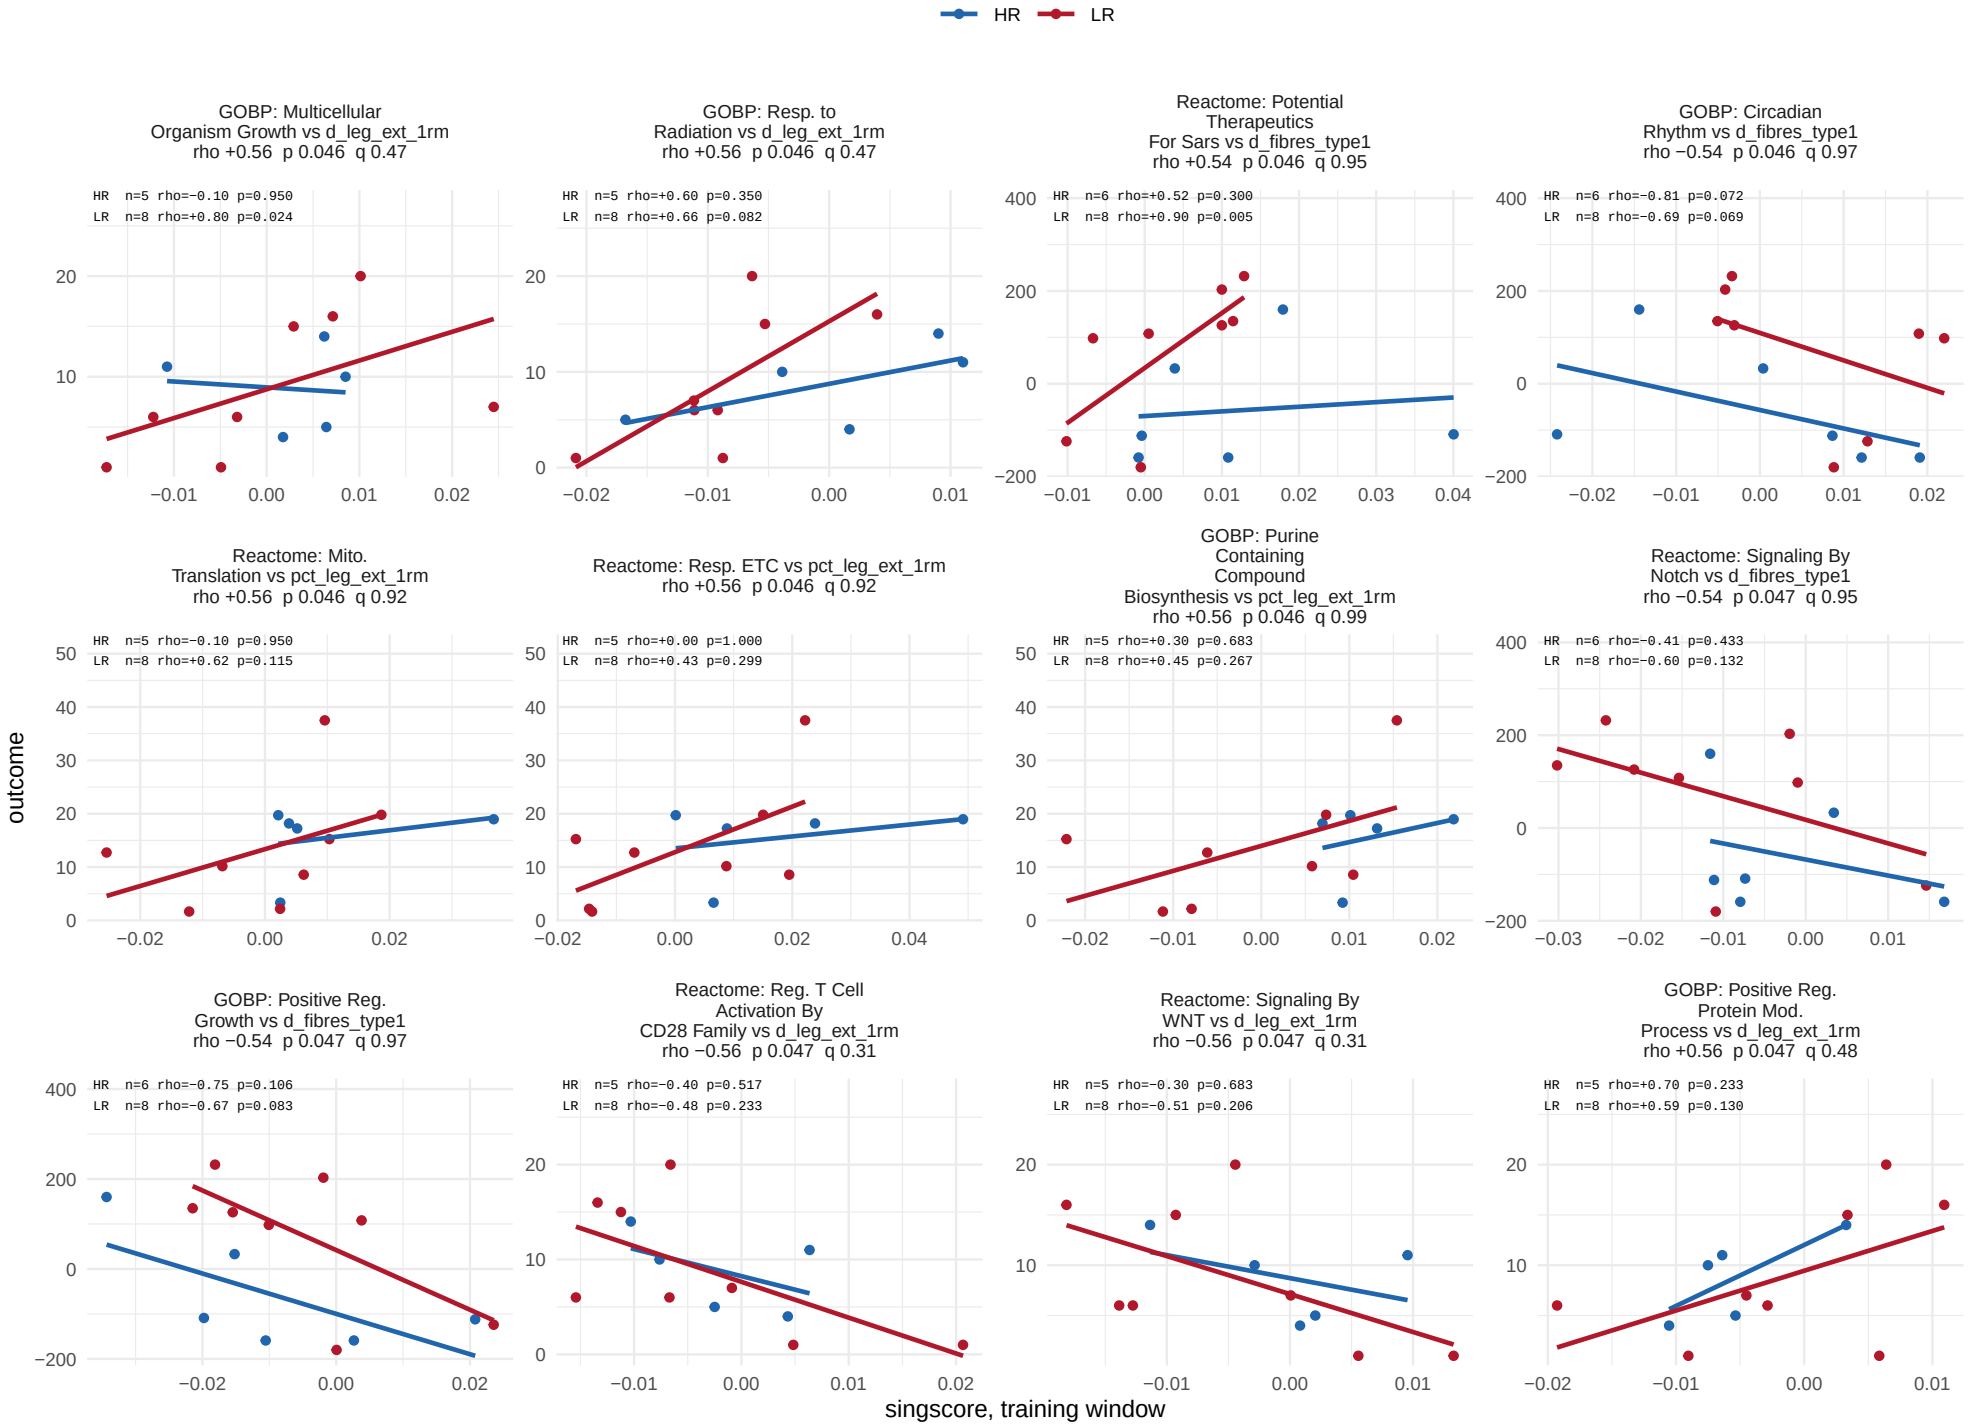

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


923 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

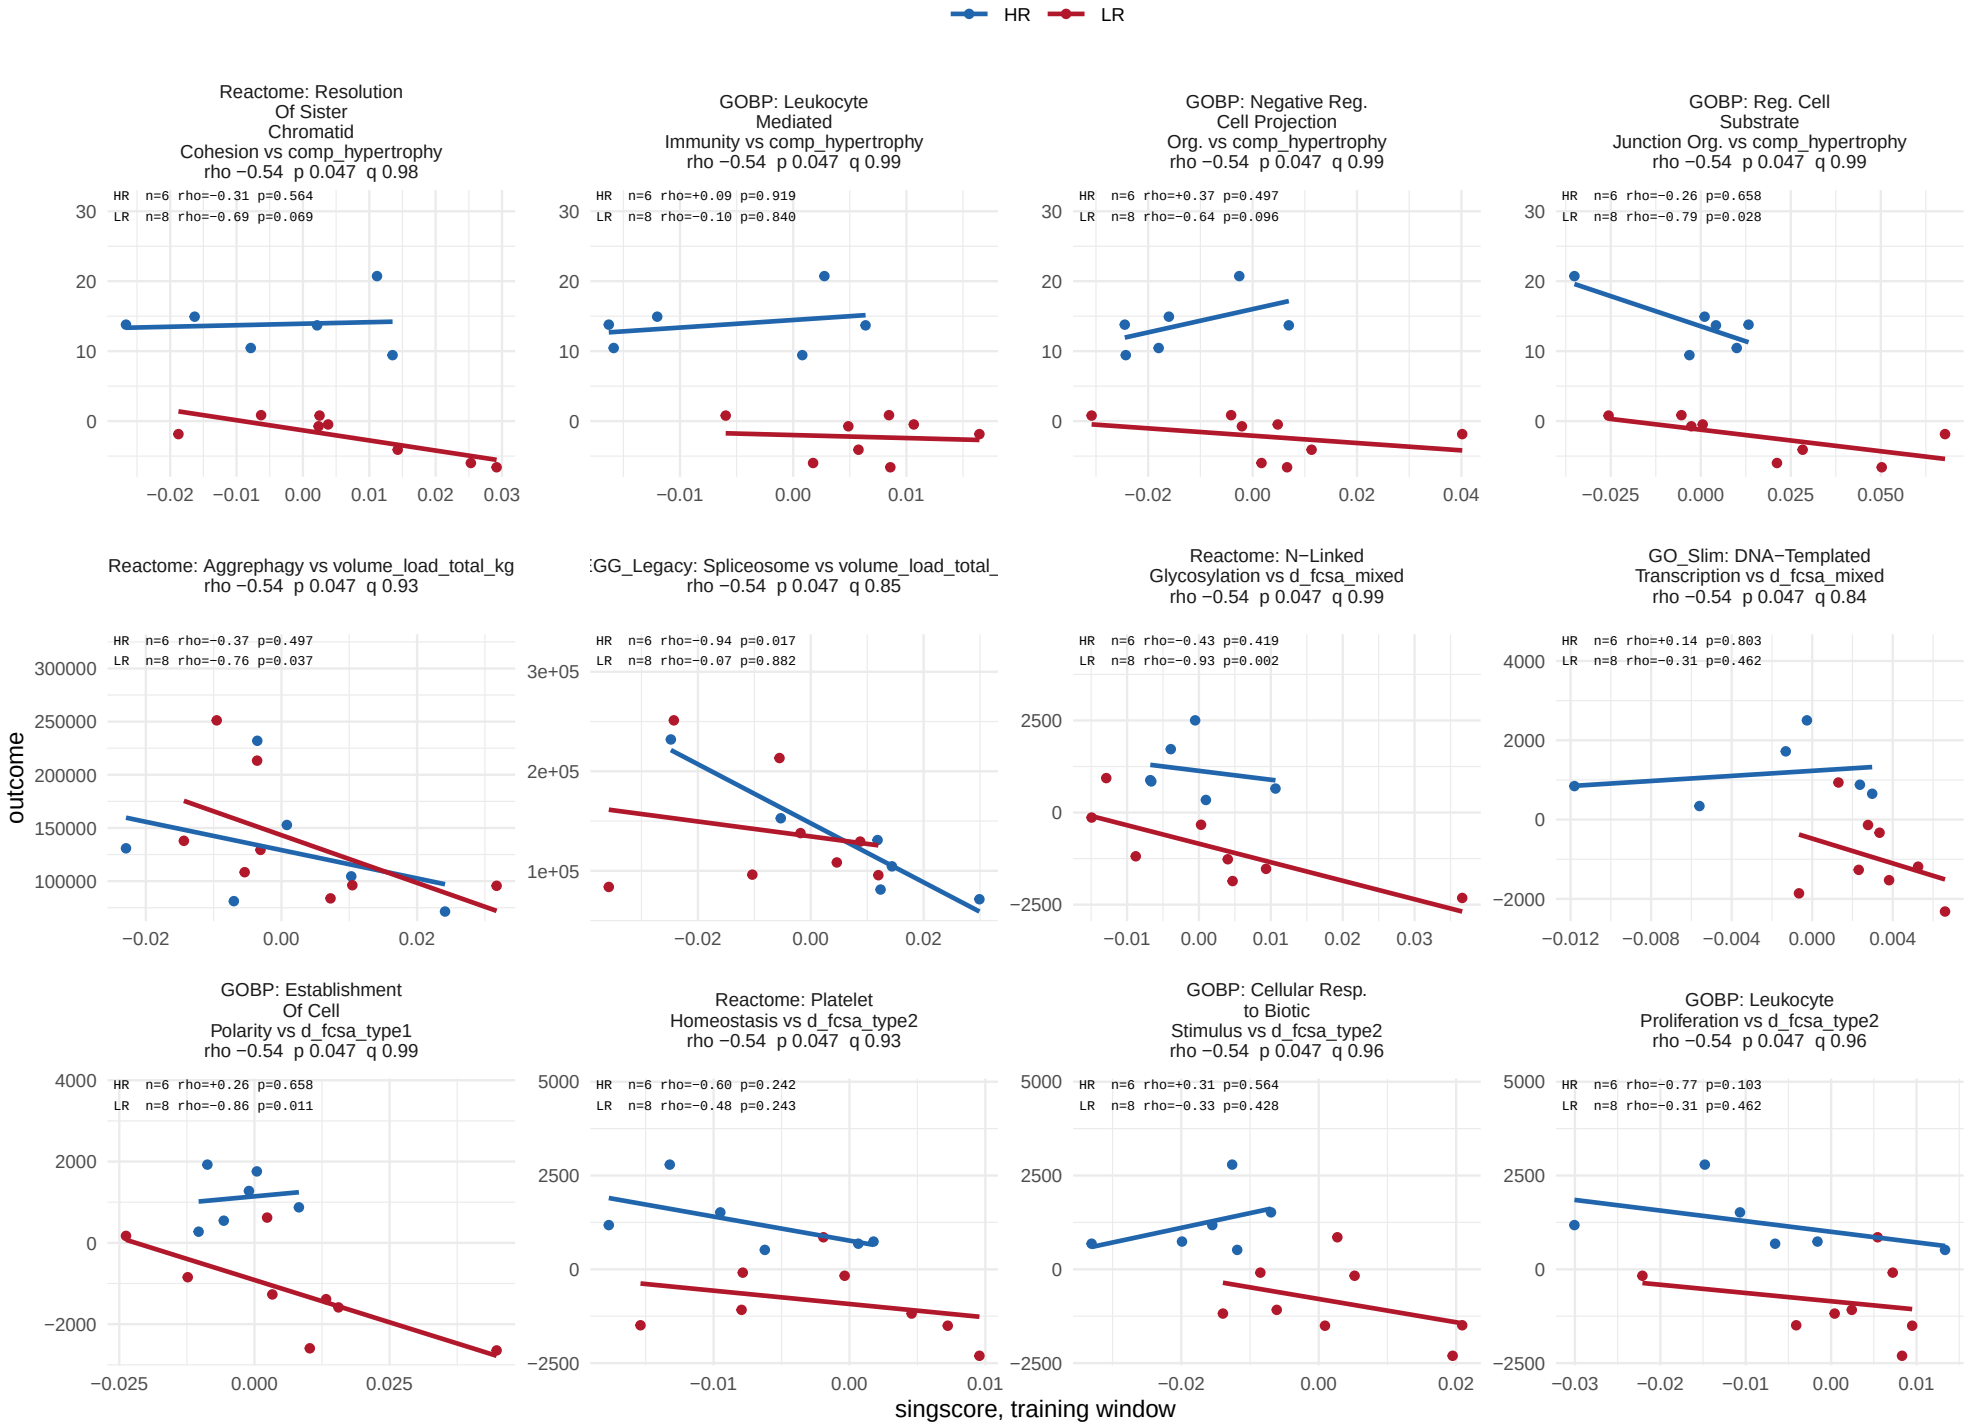

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


923 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

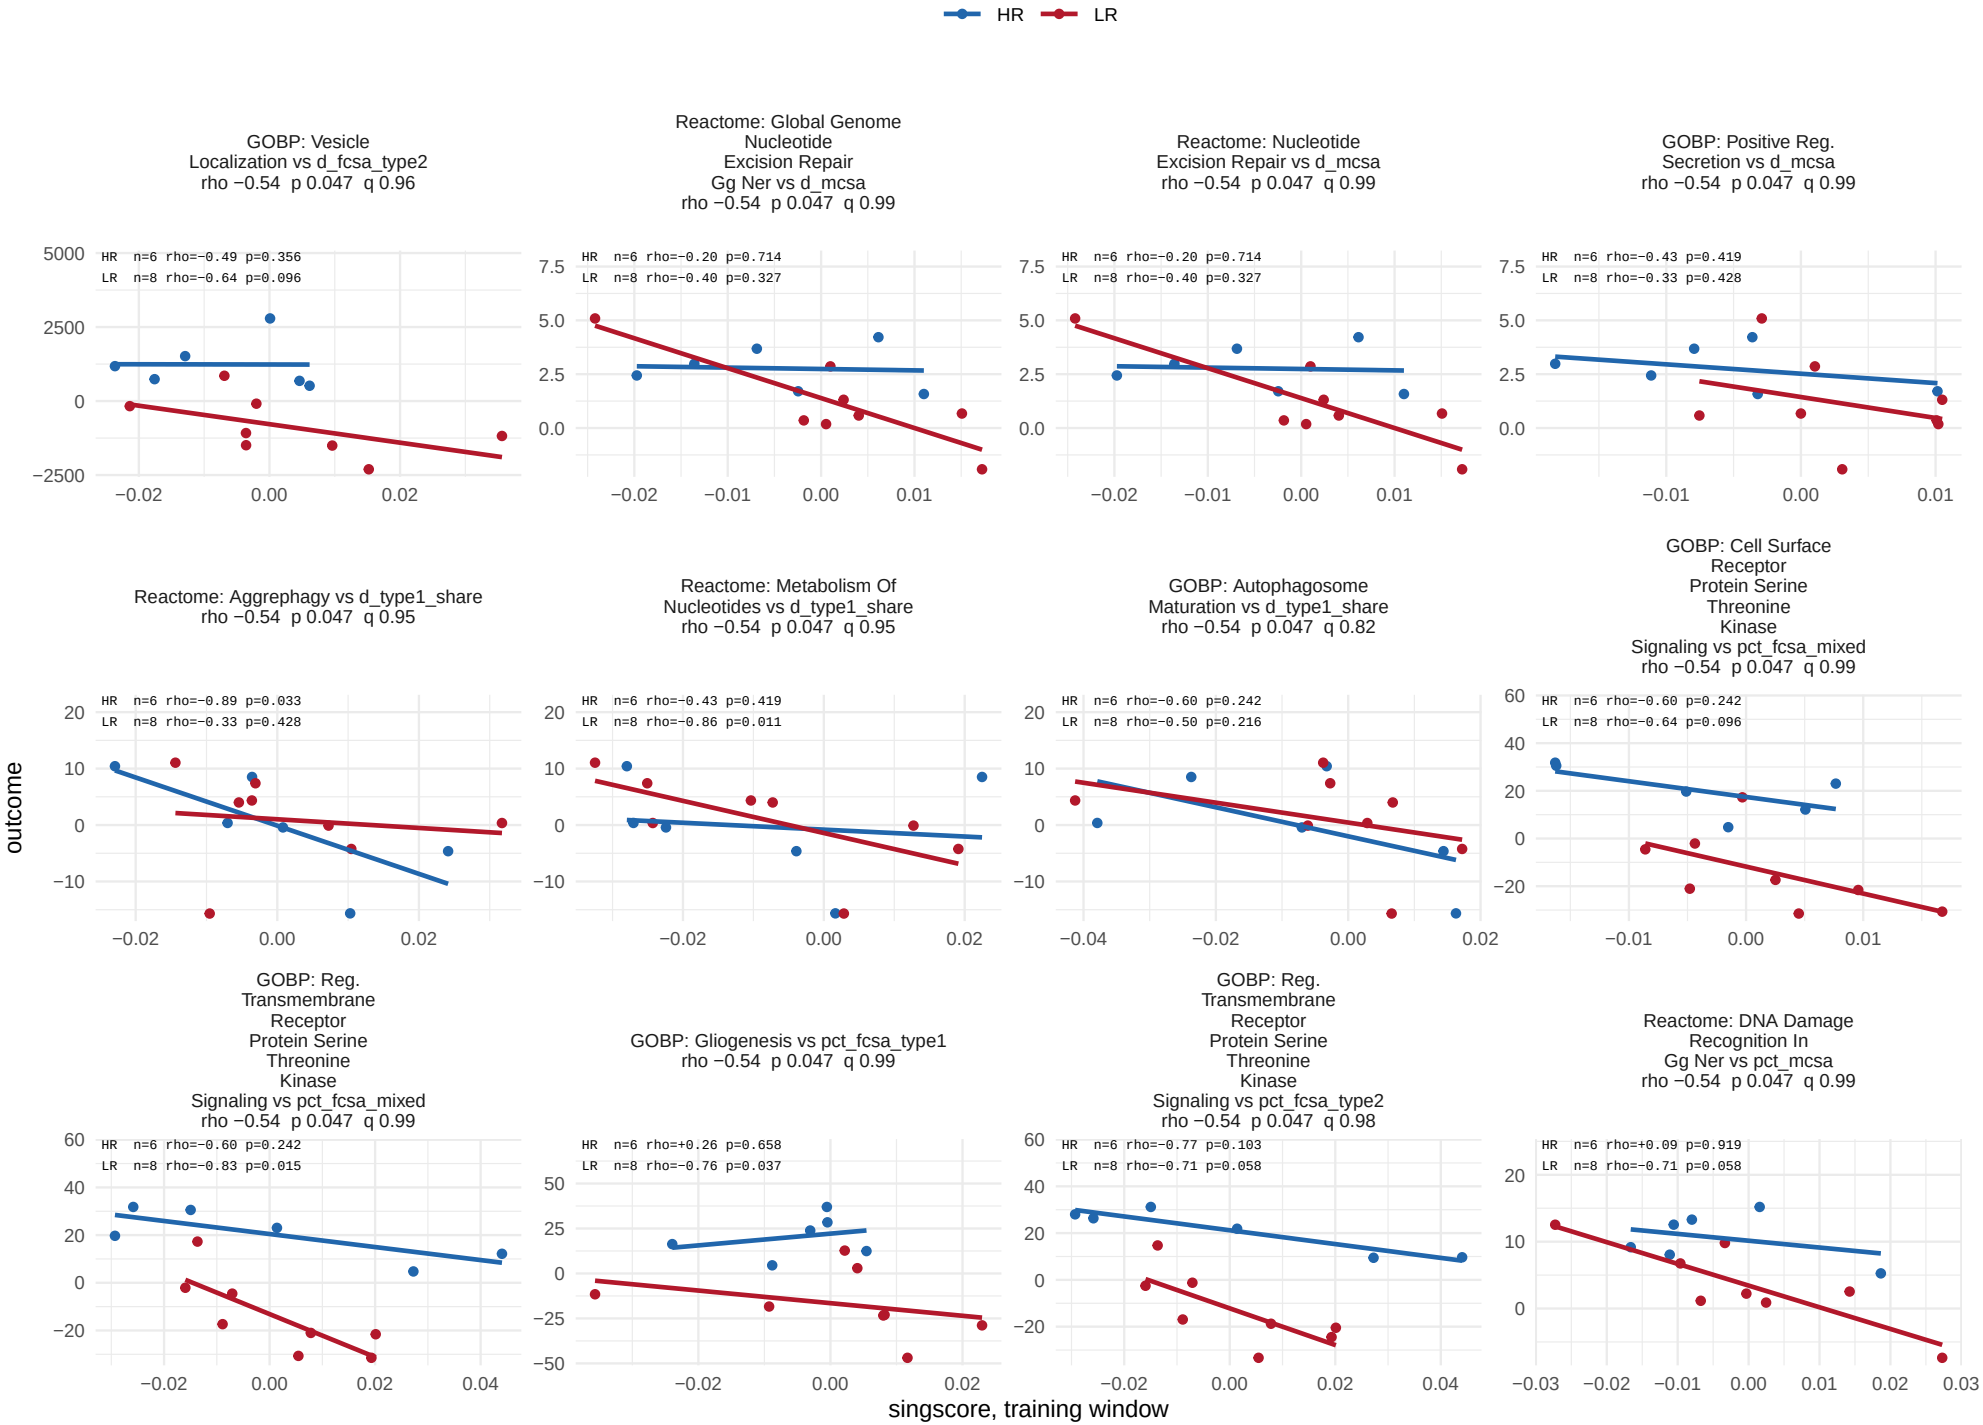

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


923 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

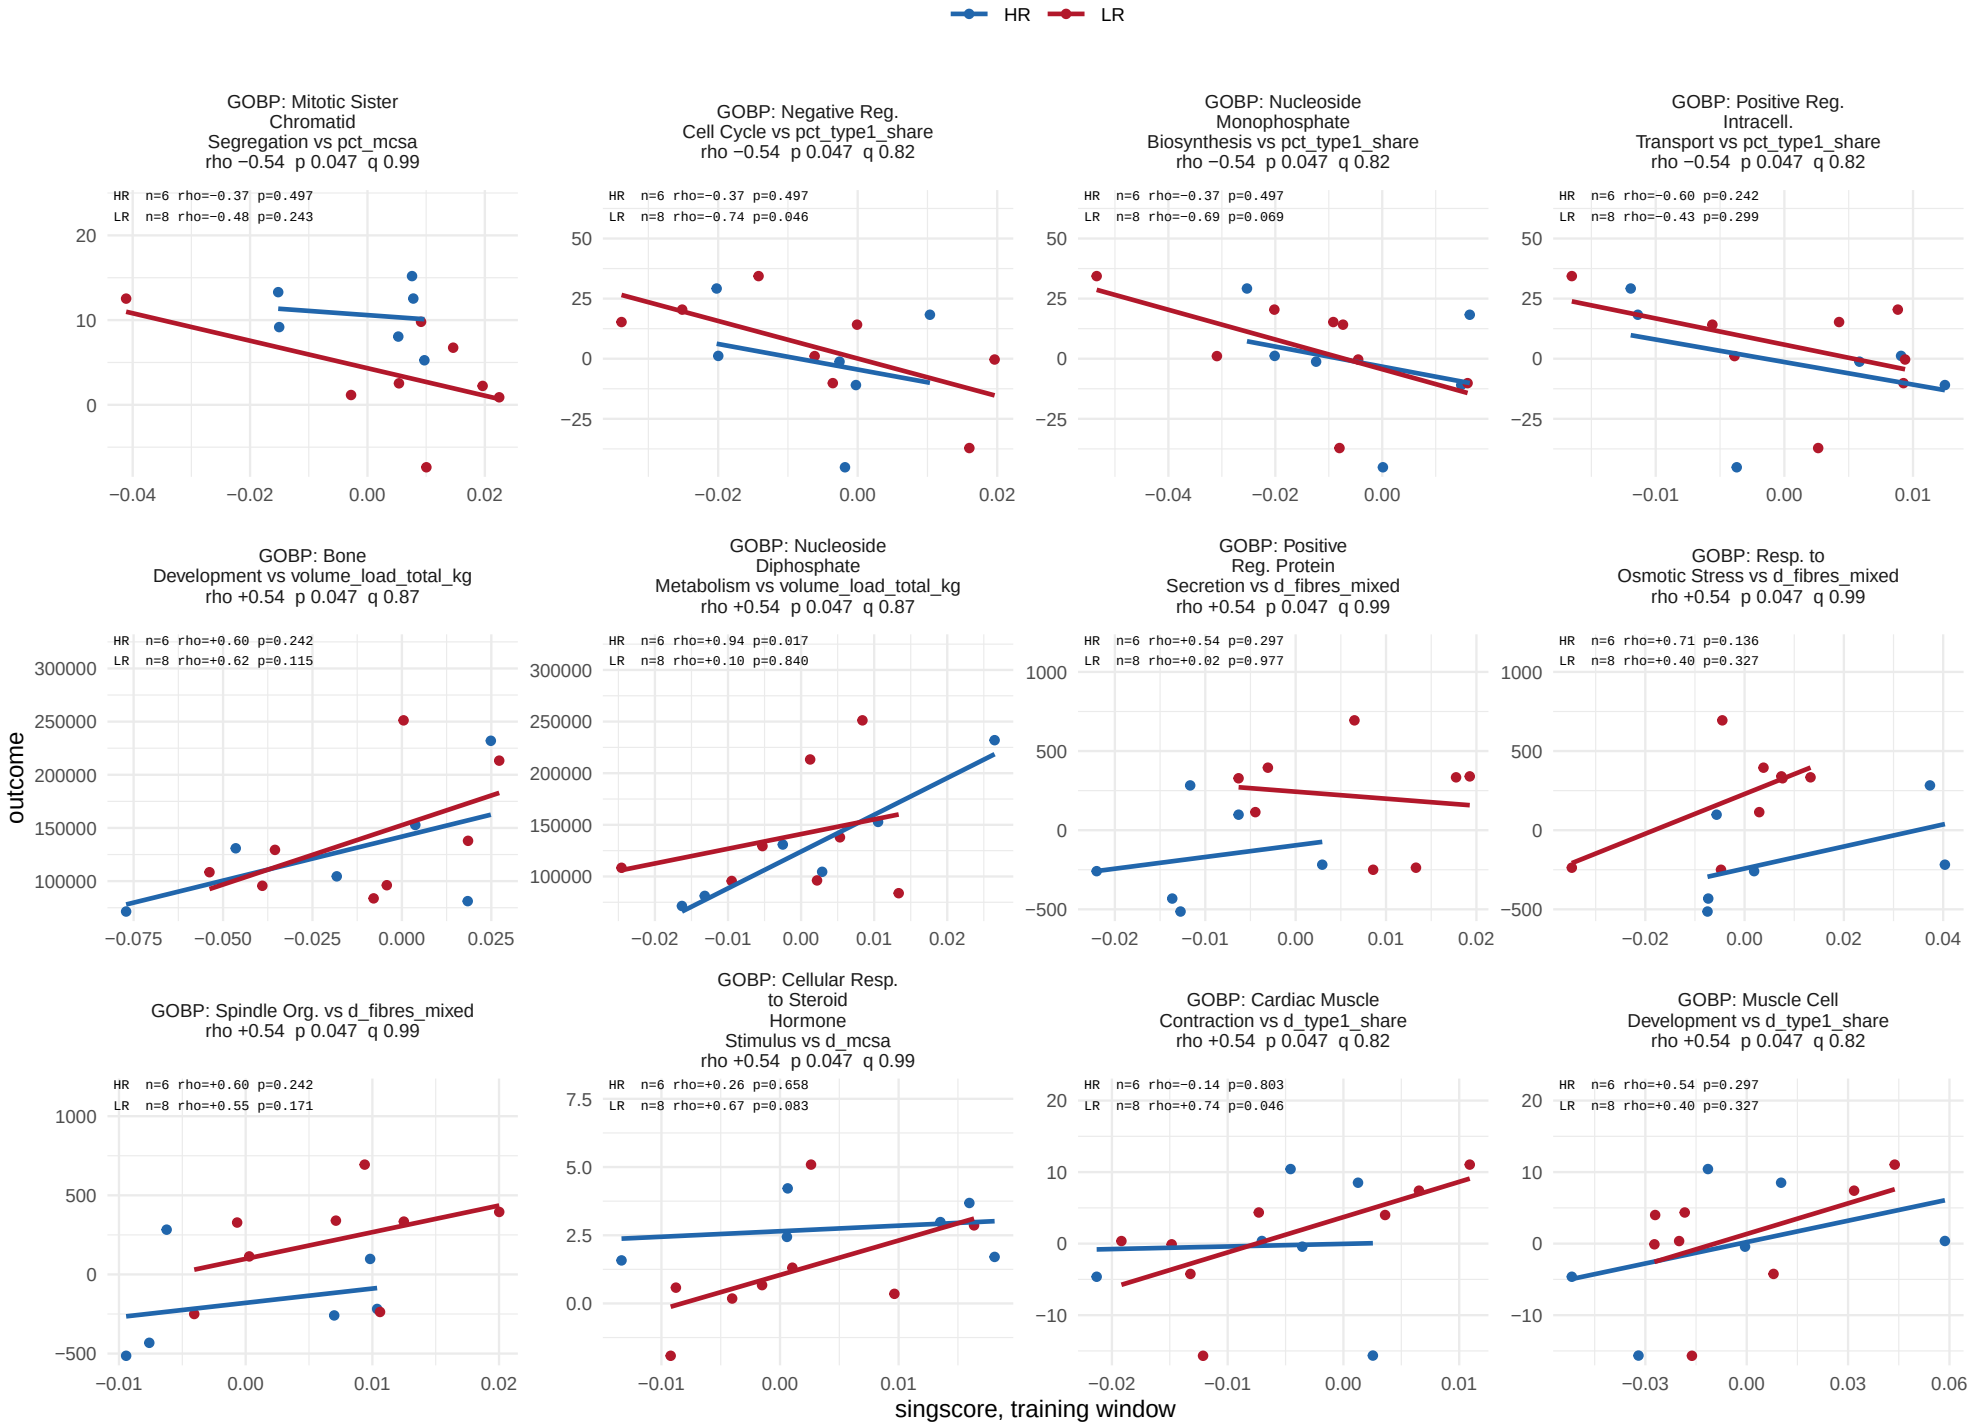

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


923 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

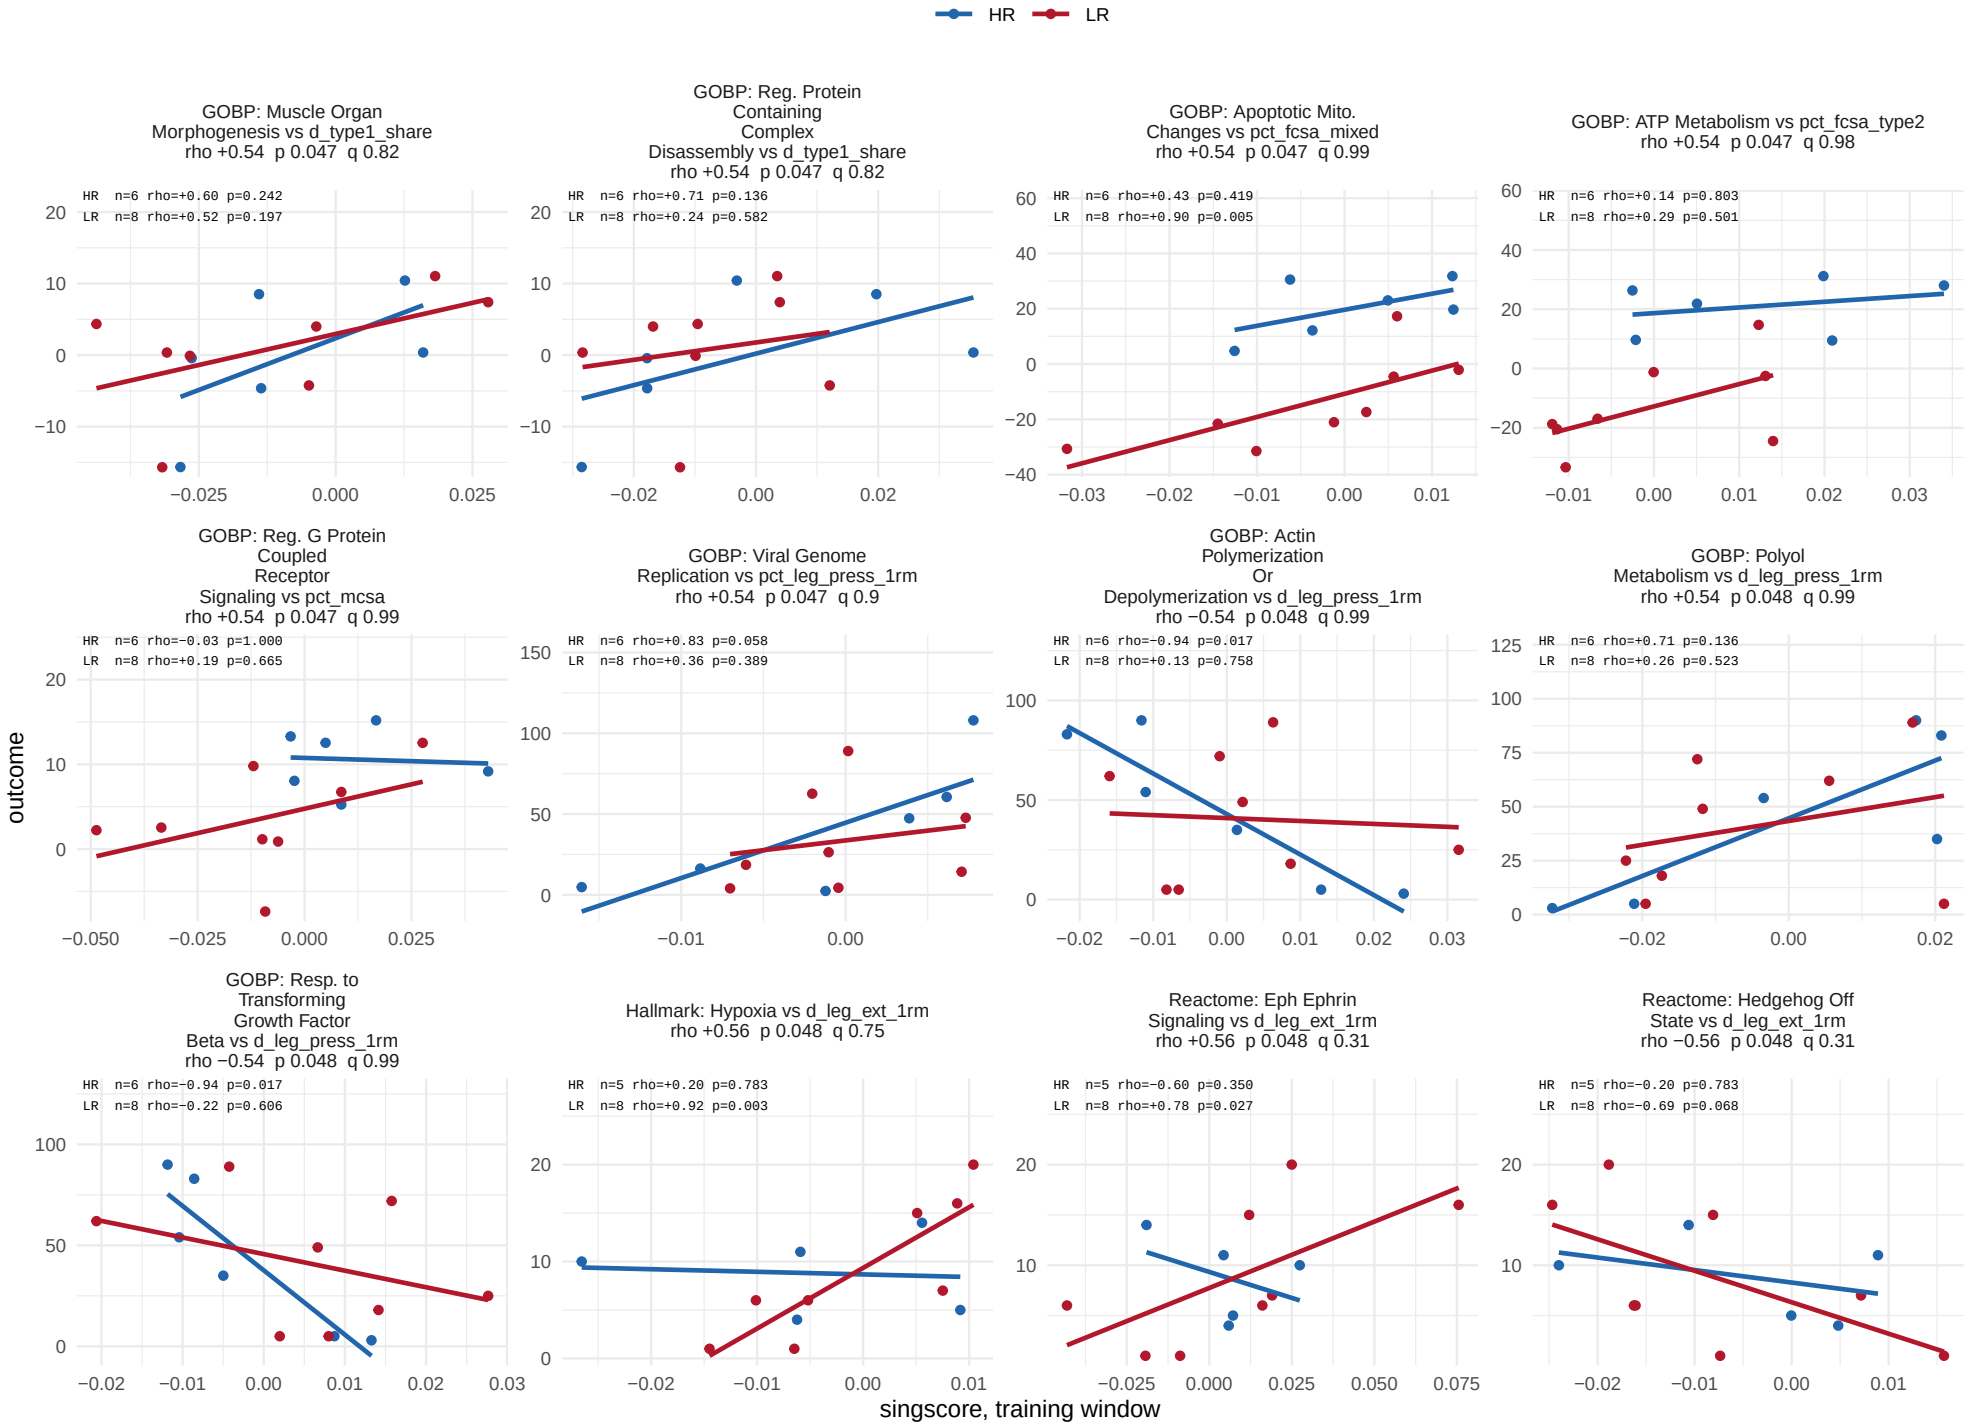

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


923 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

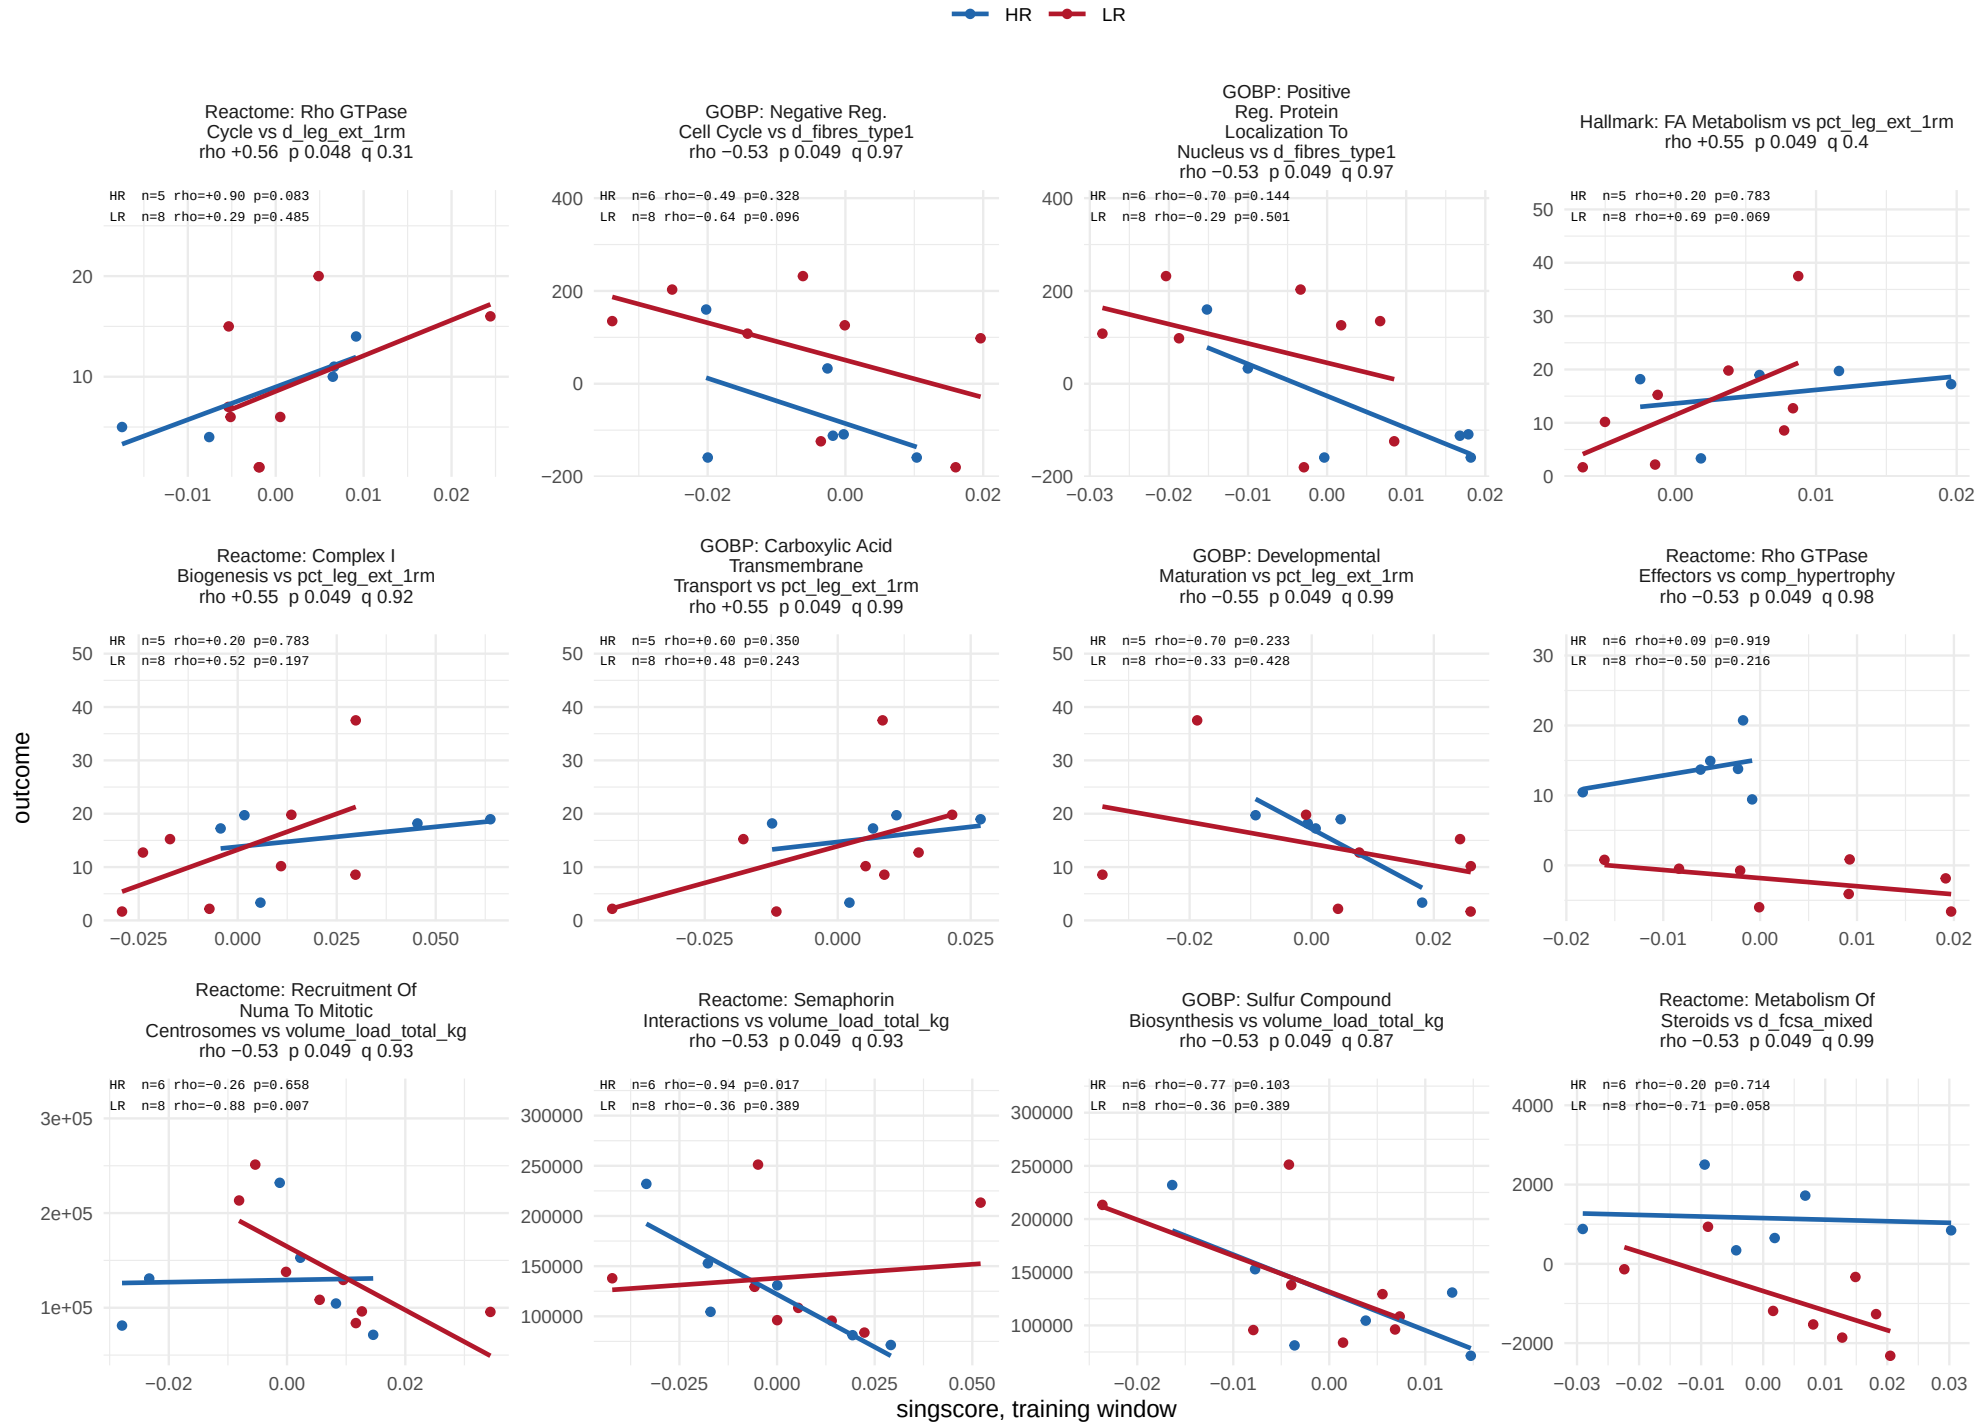

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


923 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

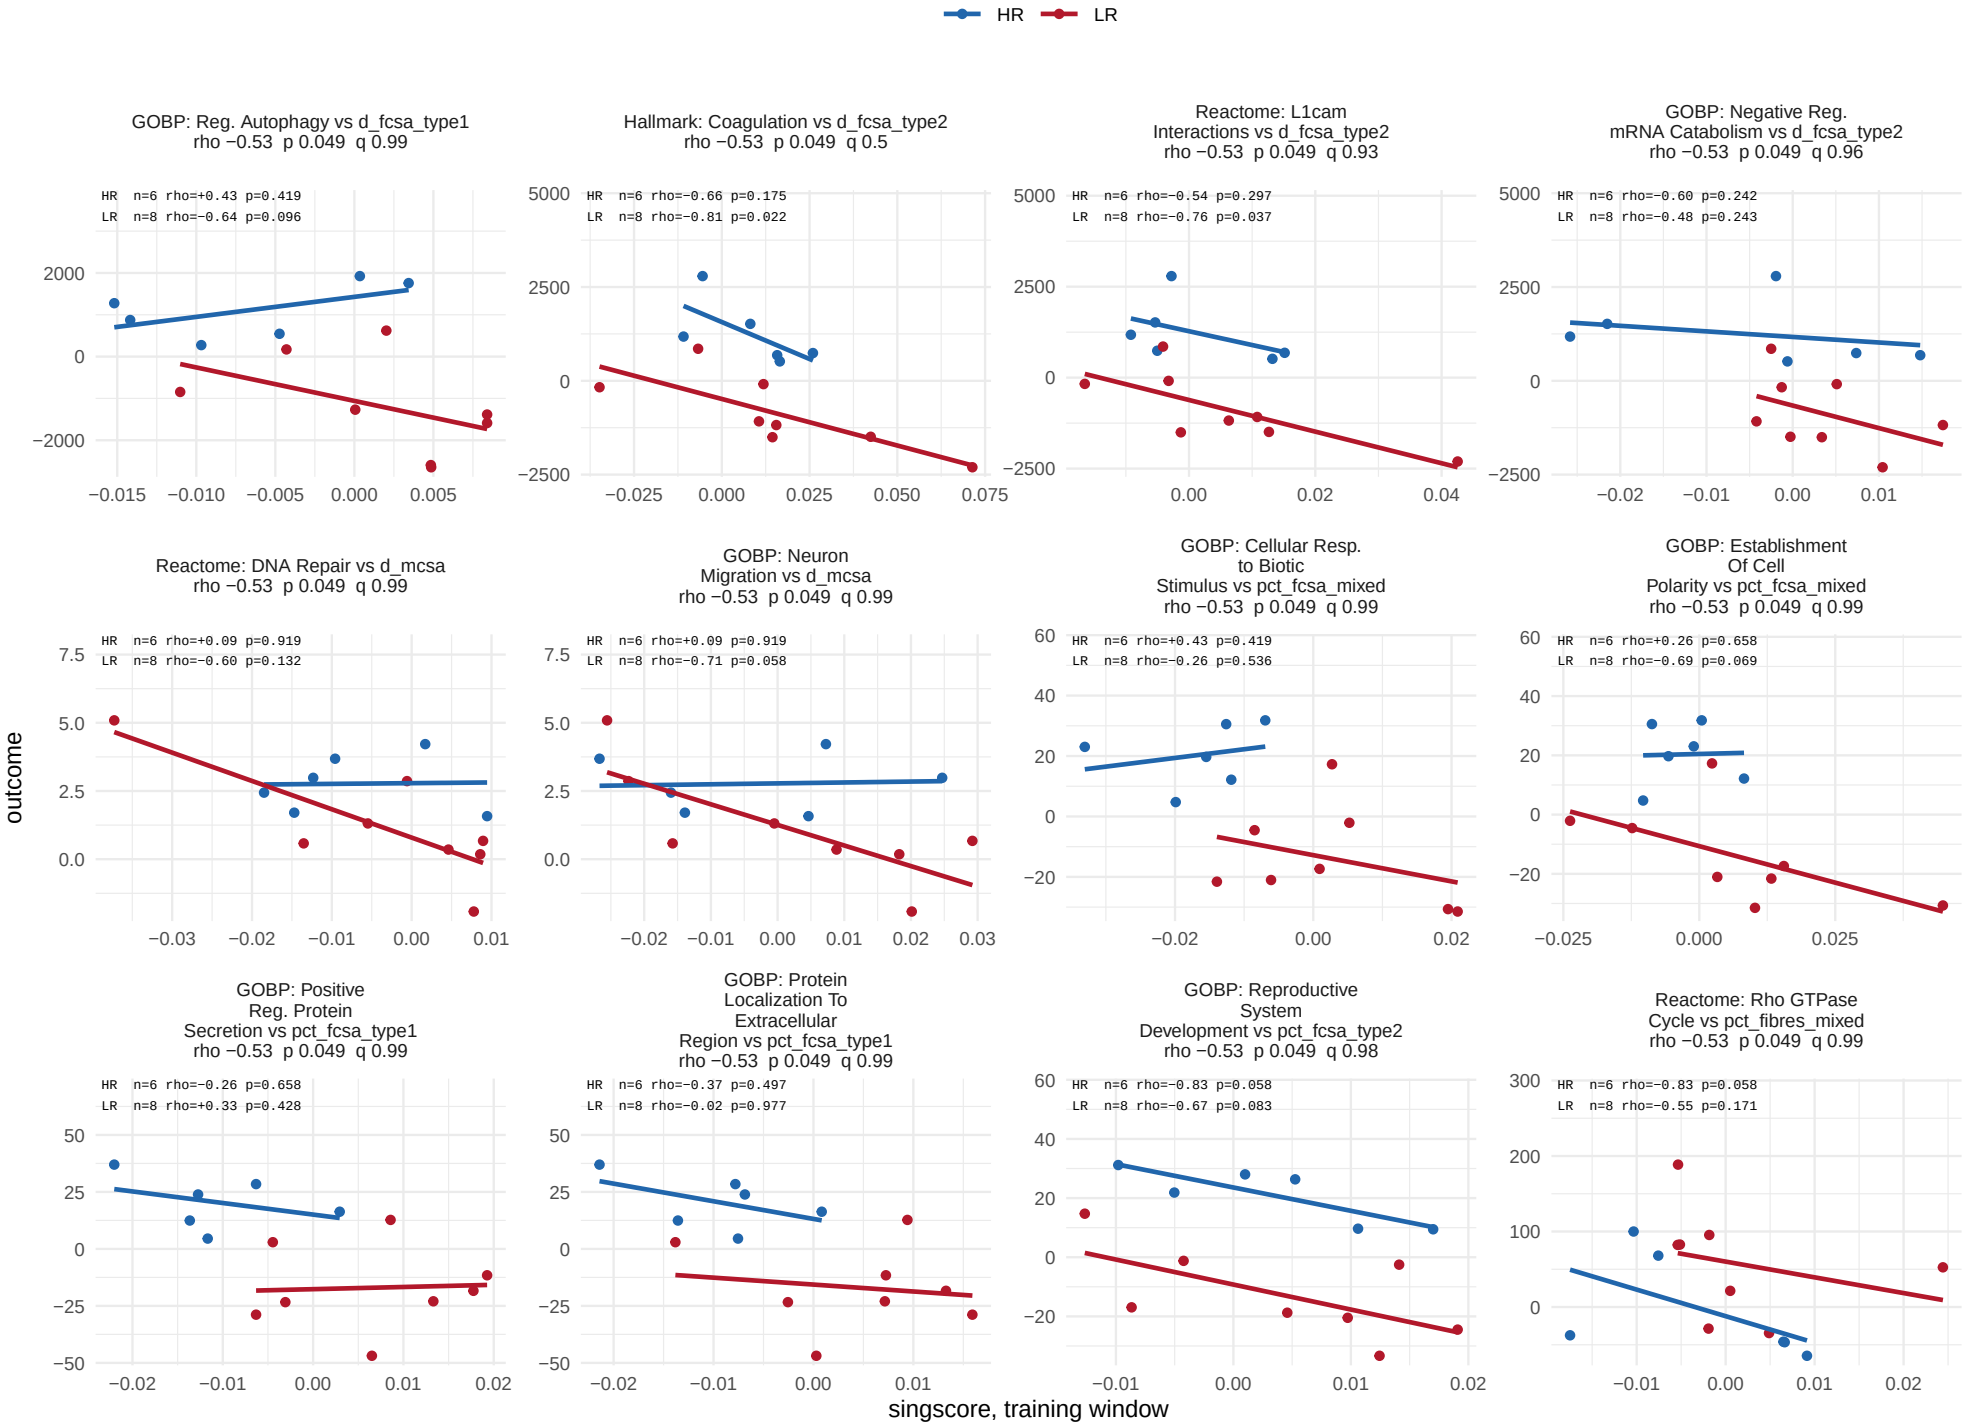

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window


923 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

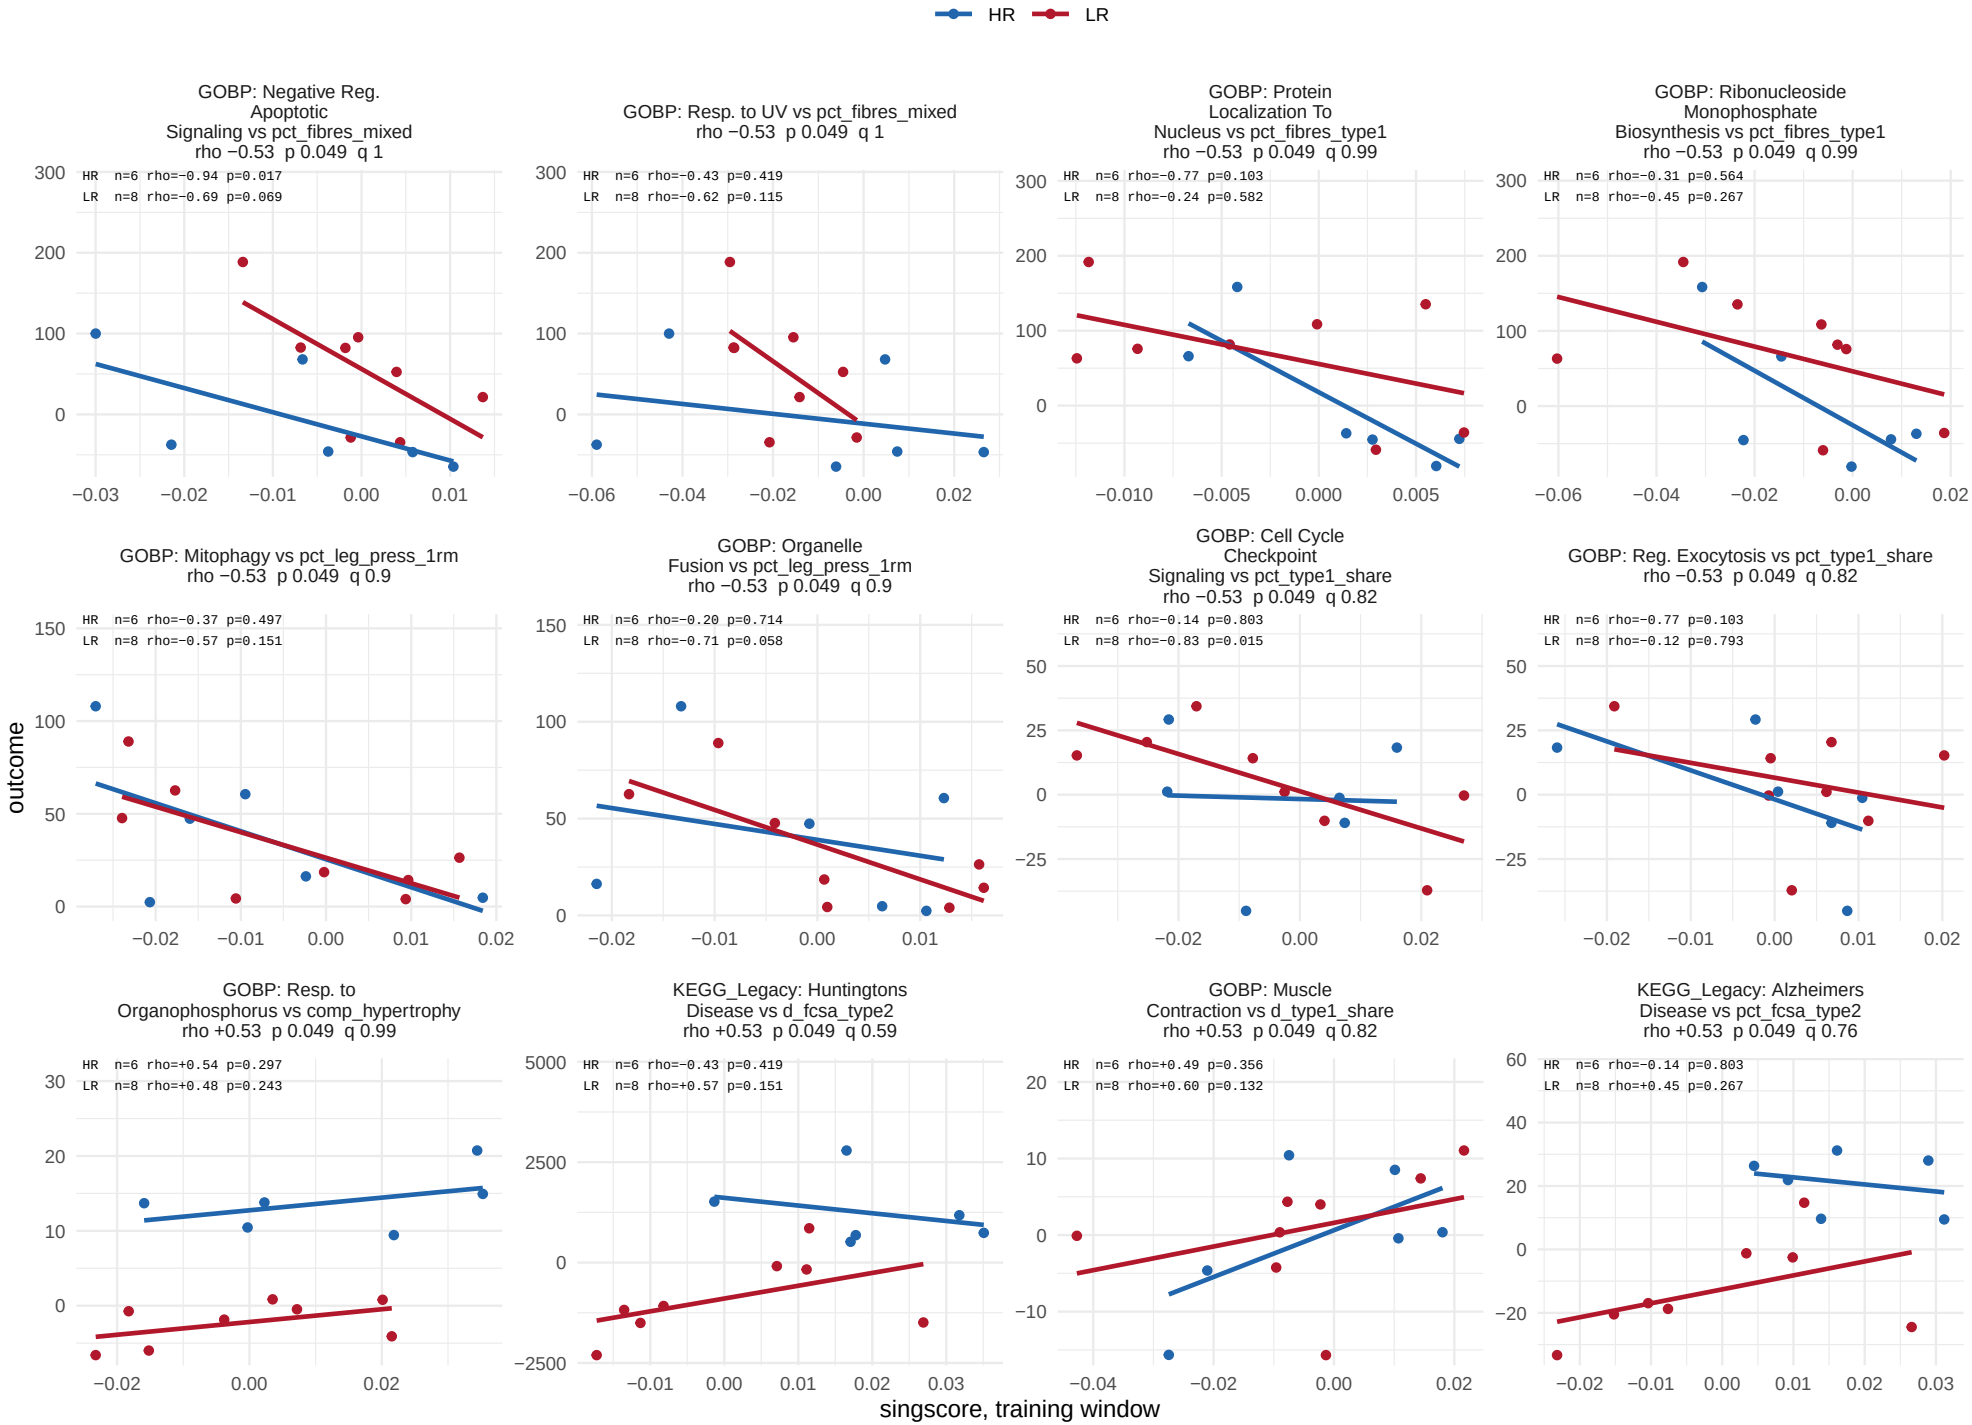

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.

Change score, training window

923 of 27560 set−outcome pairs at p < 0.05, 2 at BH < 0.05.

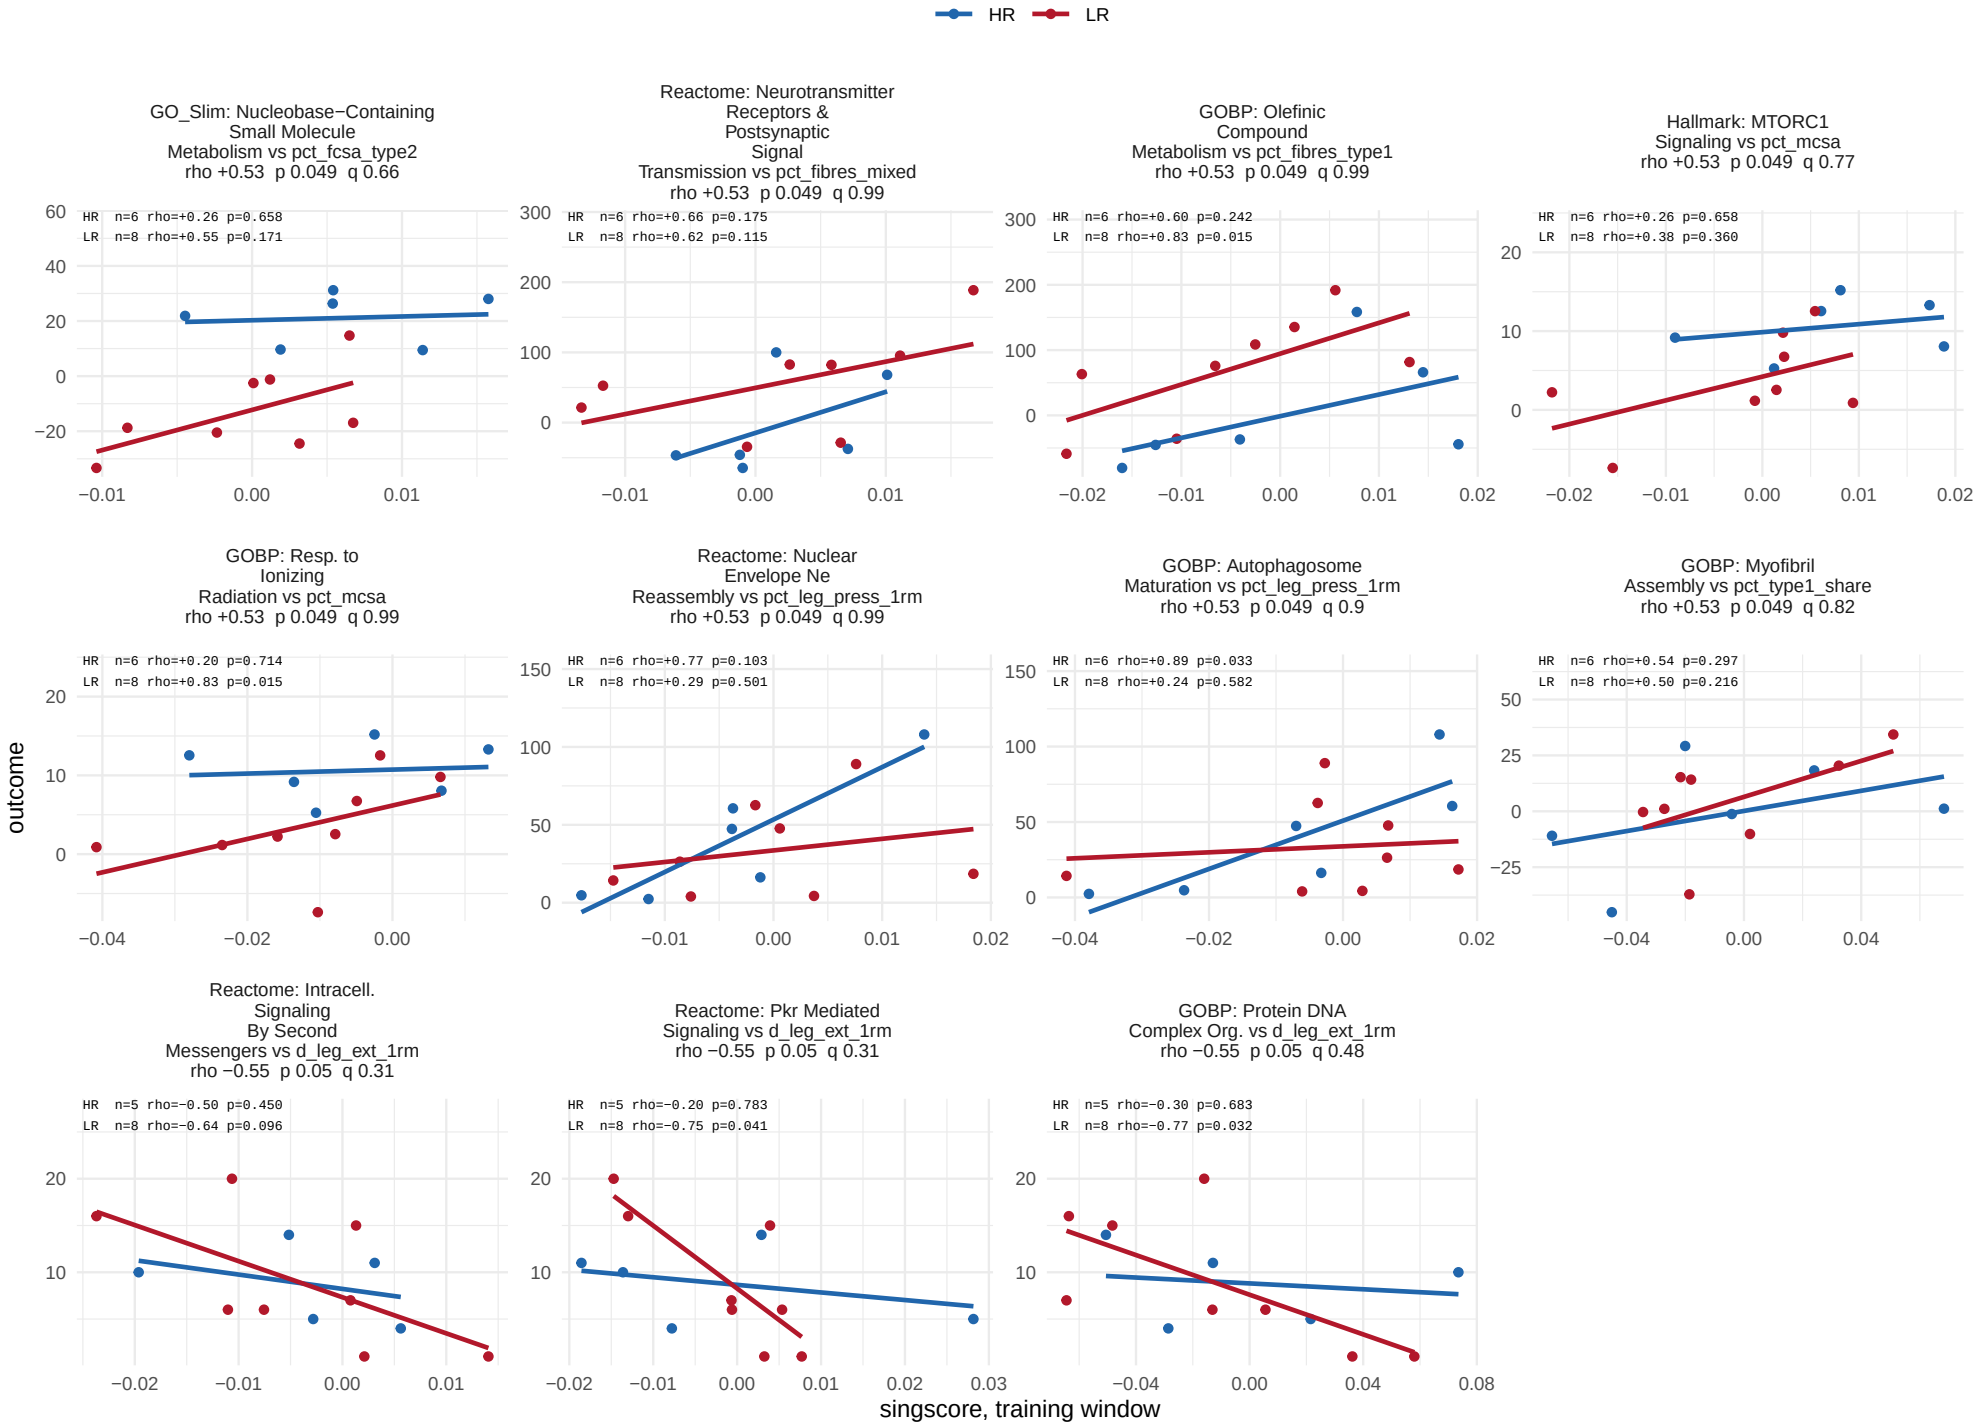

One point per subject; a line per arm. Header: Spearman rho and p pooled over both arms, and BH q within window, outcome and collection. Corner: each arm's rho and exact p. Arm is the median split of comp_hypertrophy, so pooled correlations with it and with fibre area change partly carry the group split. Table: c_data/04_associate.xlsx, change_score and change_score_by_arm.