
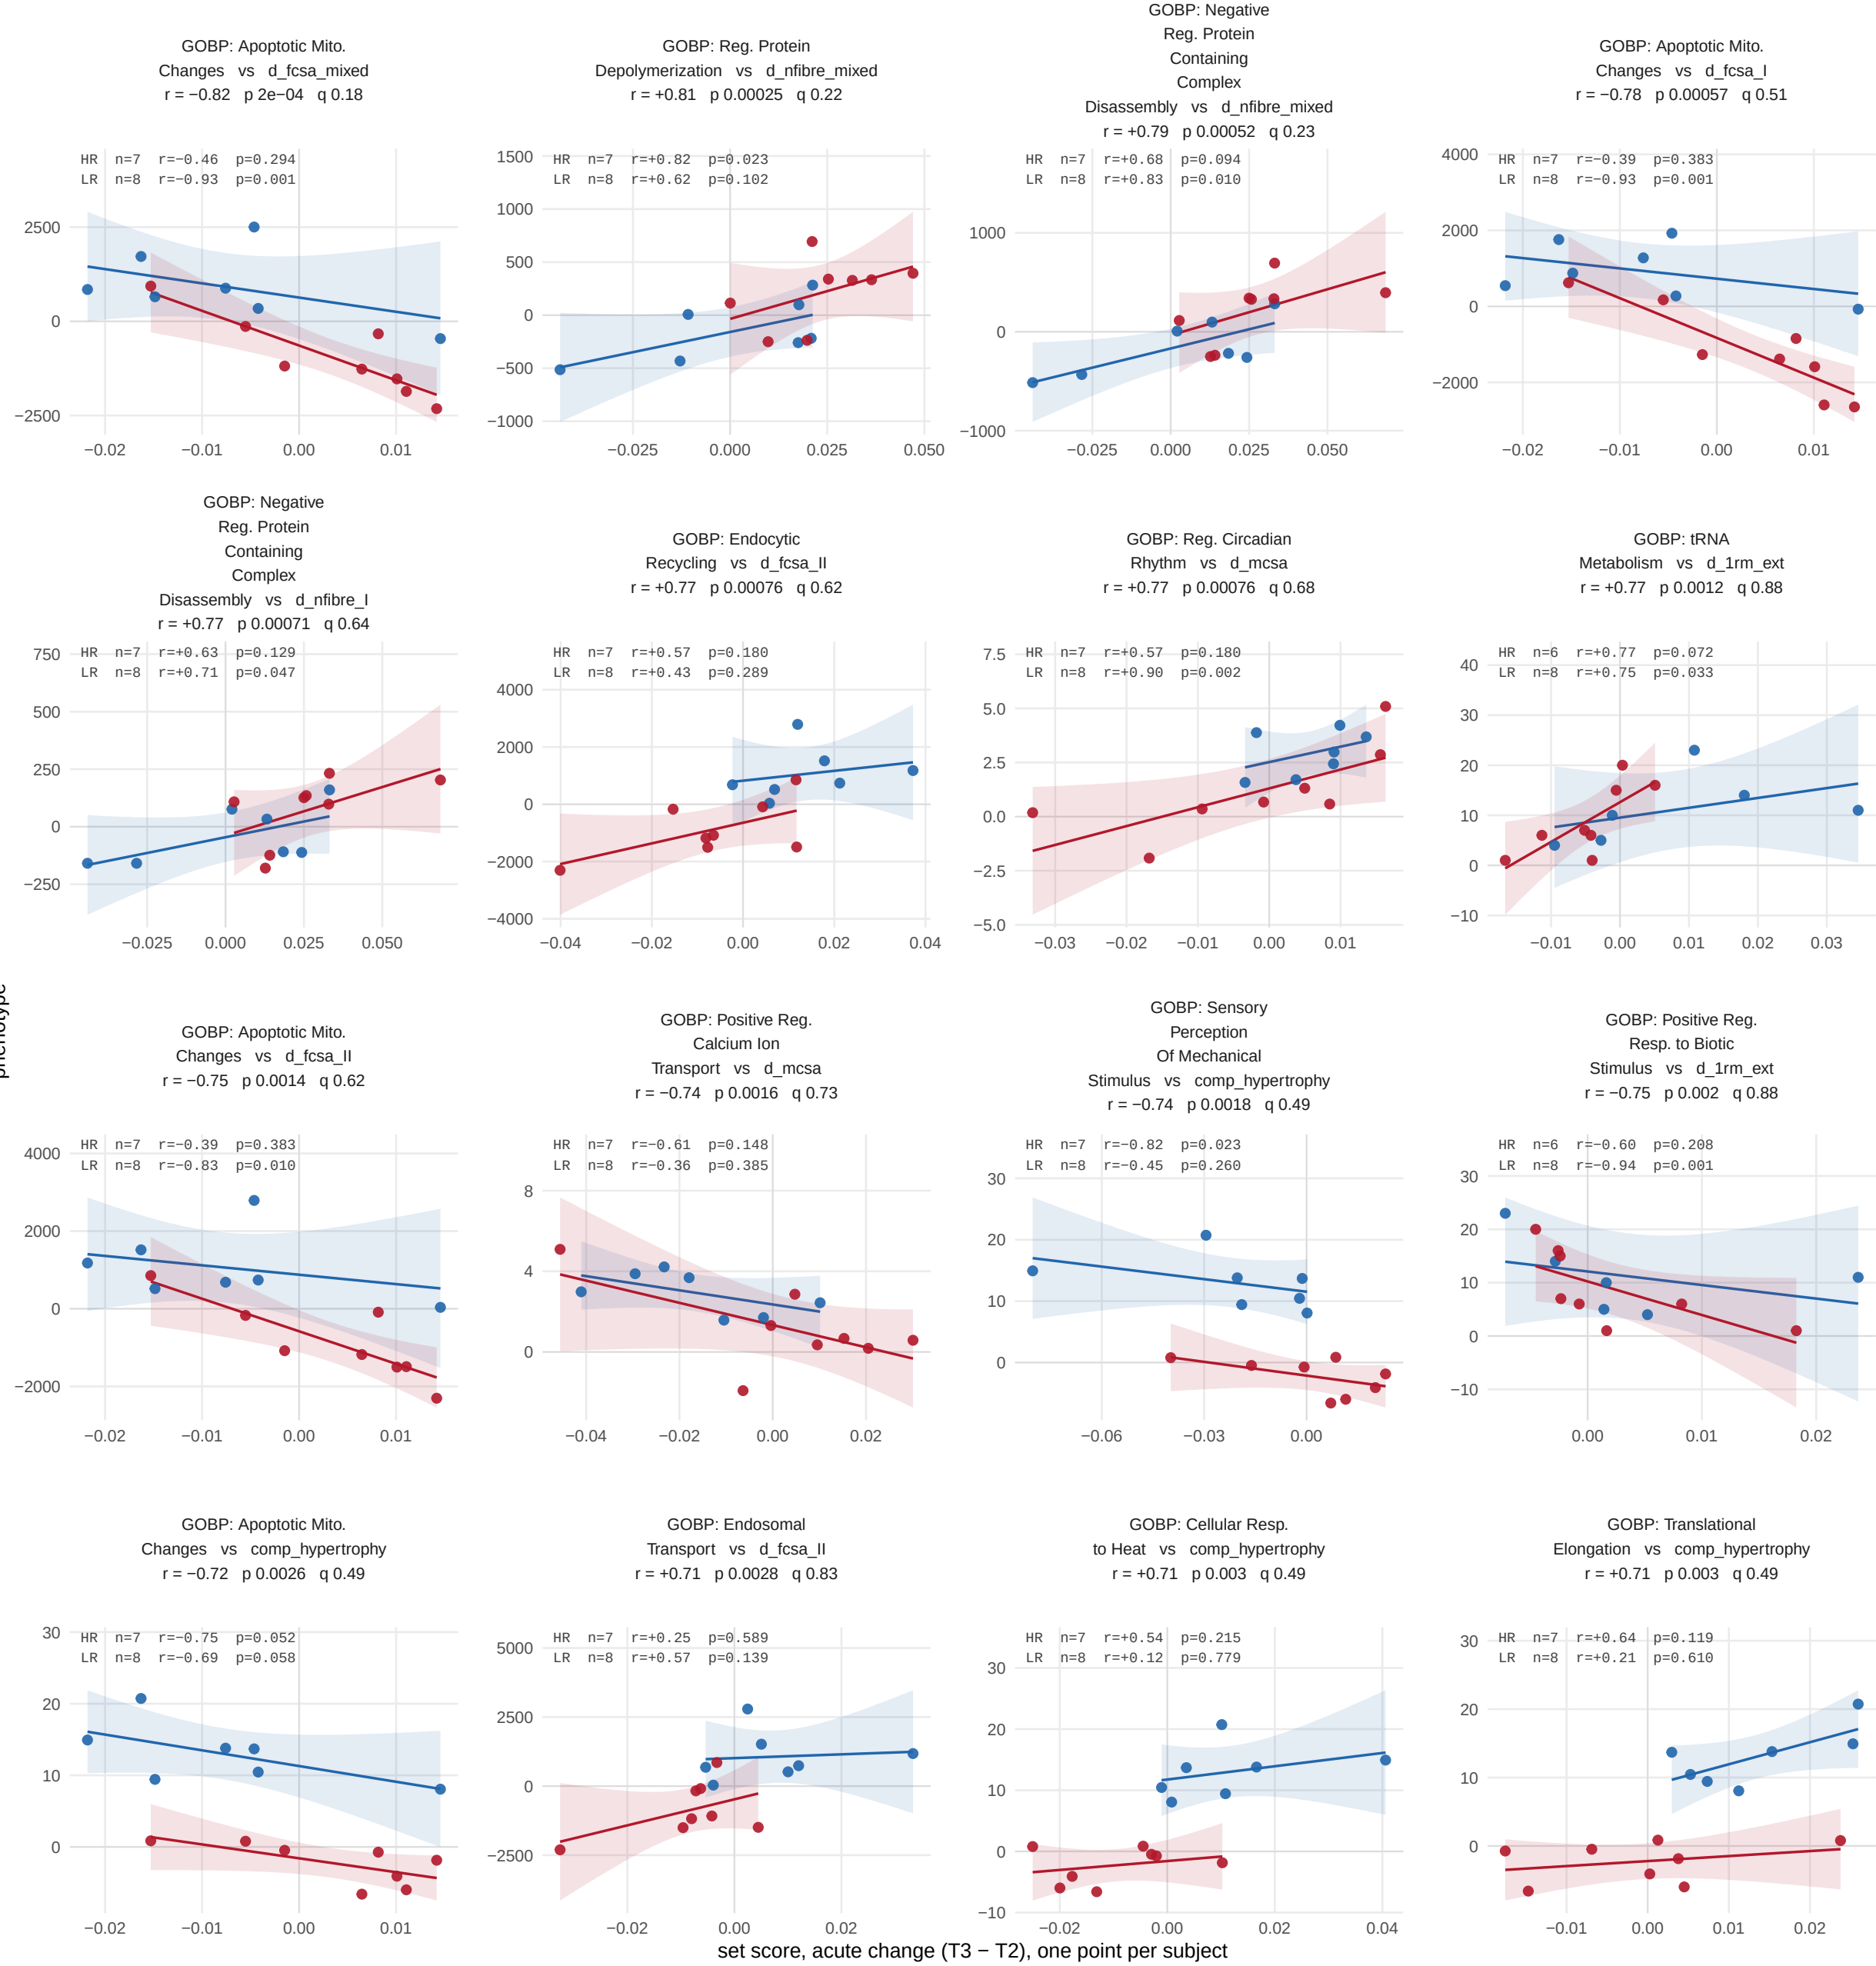


Set score against phenotype, acute change (T3 – T2)

Spearman, subjects pooled across arms




All 511 set-outcome pairs reaching nominal p, by collection then p. Lines are fitted within each arm; the header r is the pooled correlation, q from BH within collection, window and outcome. Nominal p, uncorrected. Each collection is read against its own expectation: GOBP 44.9 of 897, GO_Slim 2.9 of 58, Hallmark 1.7 of 33, KEGG_Legacy 3.1 of 62, Reactome 16.4 of 328.

Set score against phenotype, acute change (T3 – T2)

Spearman, subjects pooled across arms

HR LR

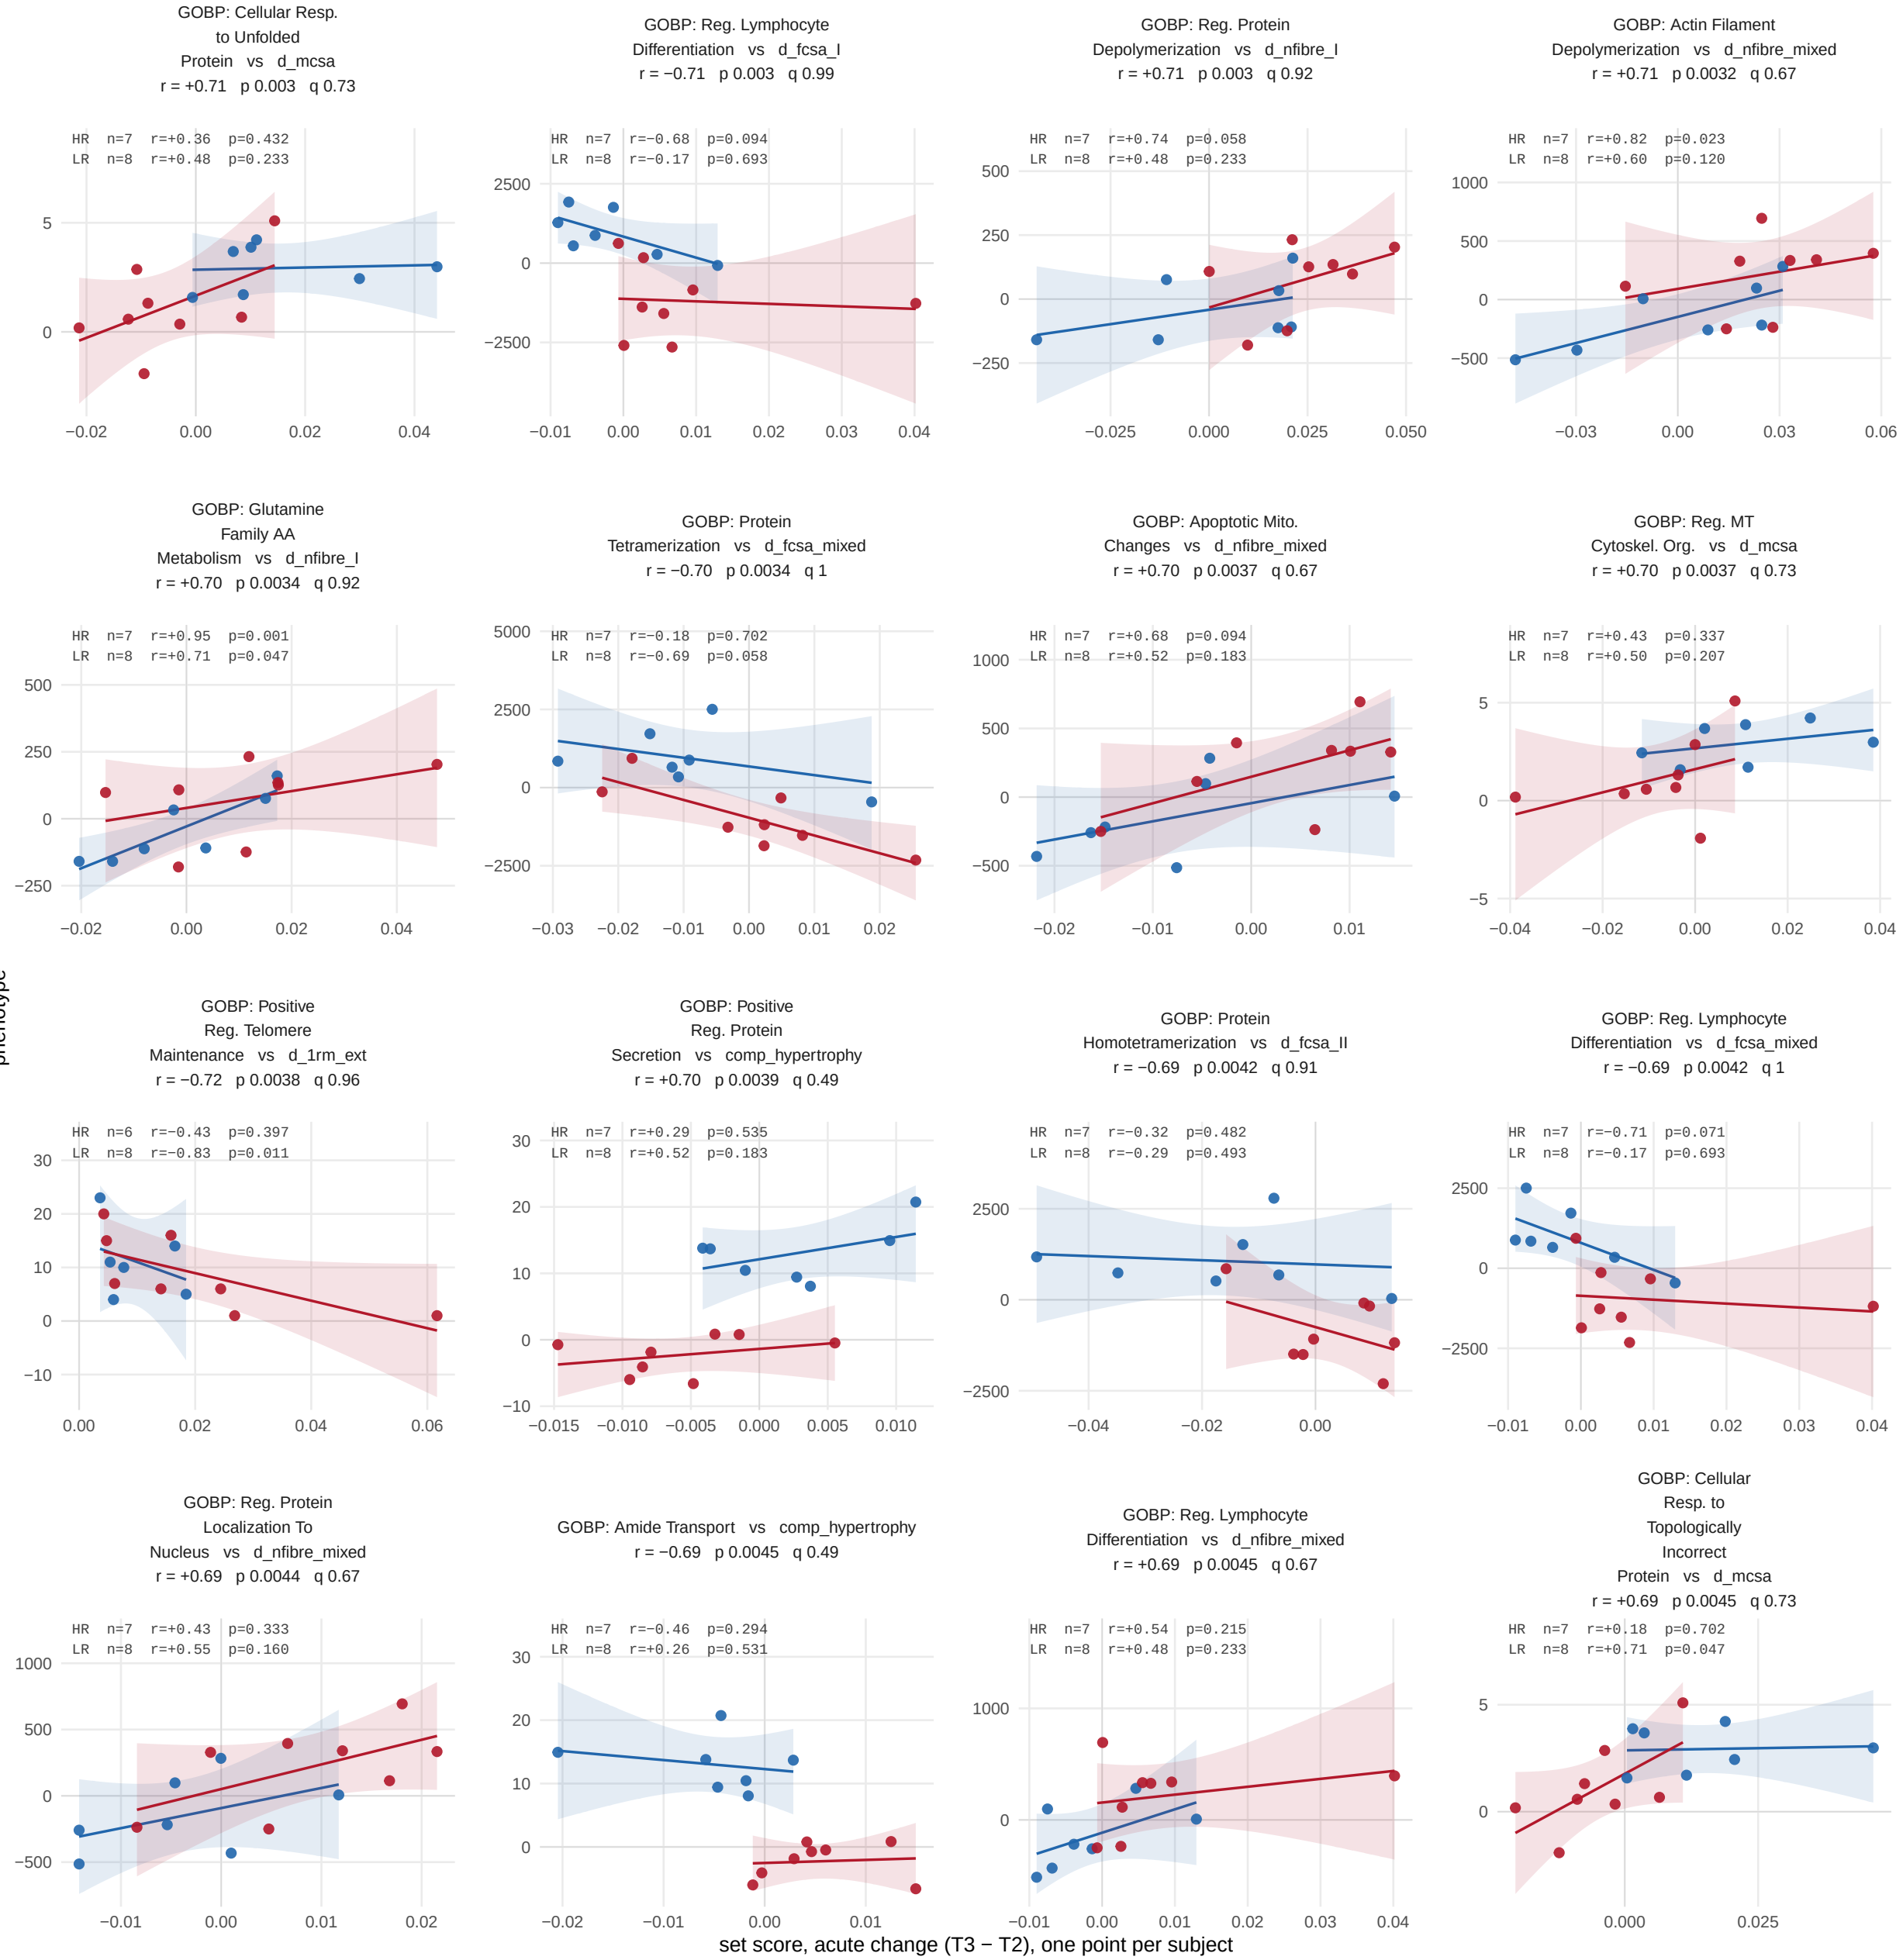


All 511 set–outcome pairs reaching nominal p, by collection then p. Lines are fitted within each arm; the header r is the pooled correlation, q from BH within collection, window and outcome. Nominal p, uncorrected. Each collection is read against its own expectation: GOBP 44.9 of 897, GO_Slim 2.9 of 58, Hallmark 1.7 of 33, KEGG_Legacy 3.1 of 62, Reactome 16.4 of 328.

Set score against phenotype, acute change (T3 – T2)

Spearman, subjects pooled across arms

HR LR

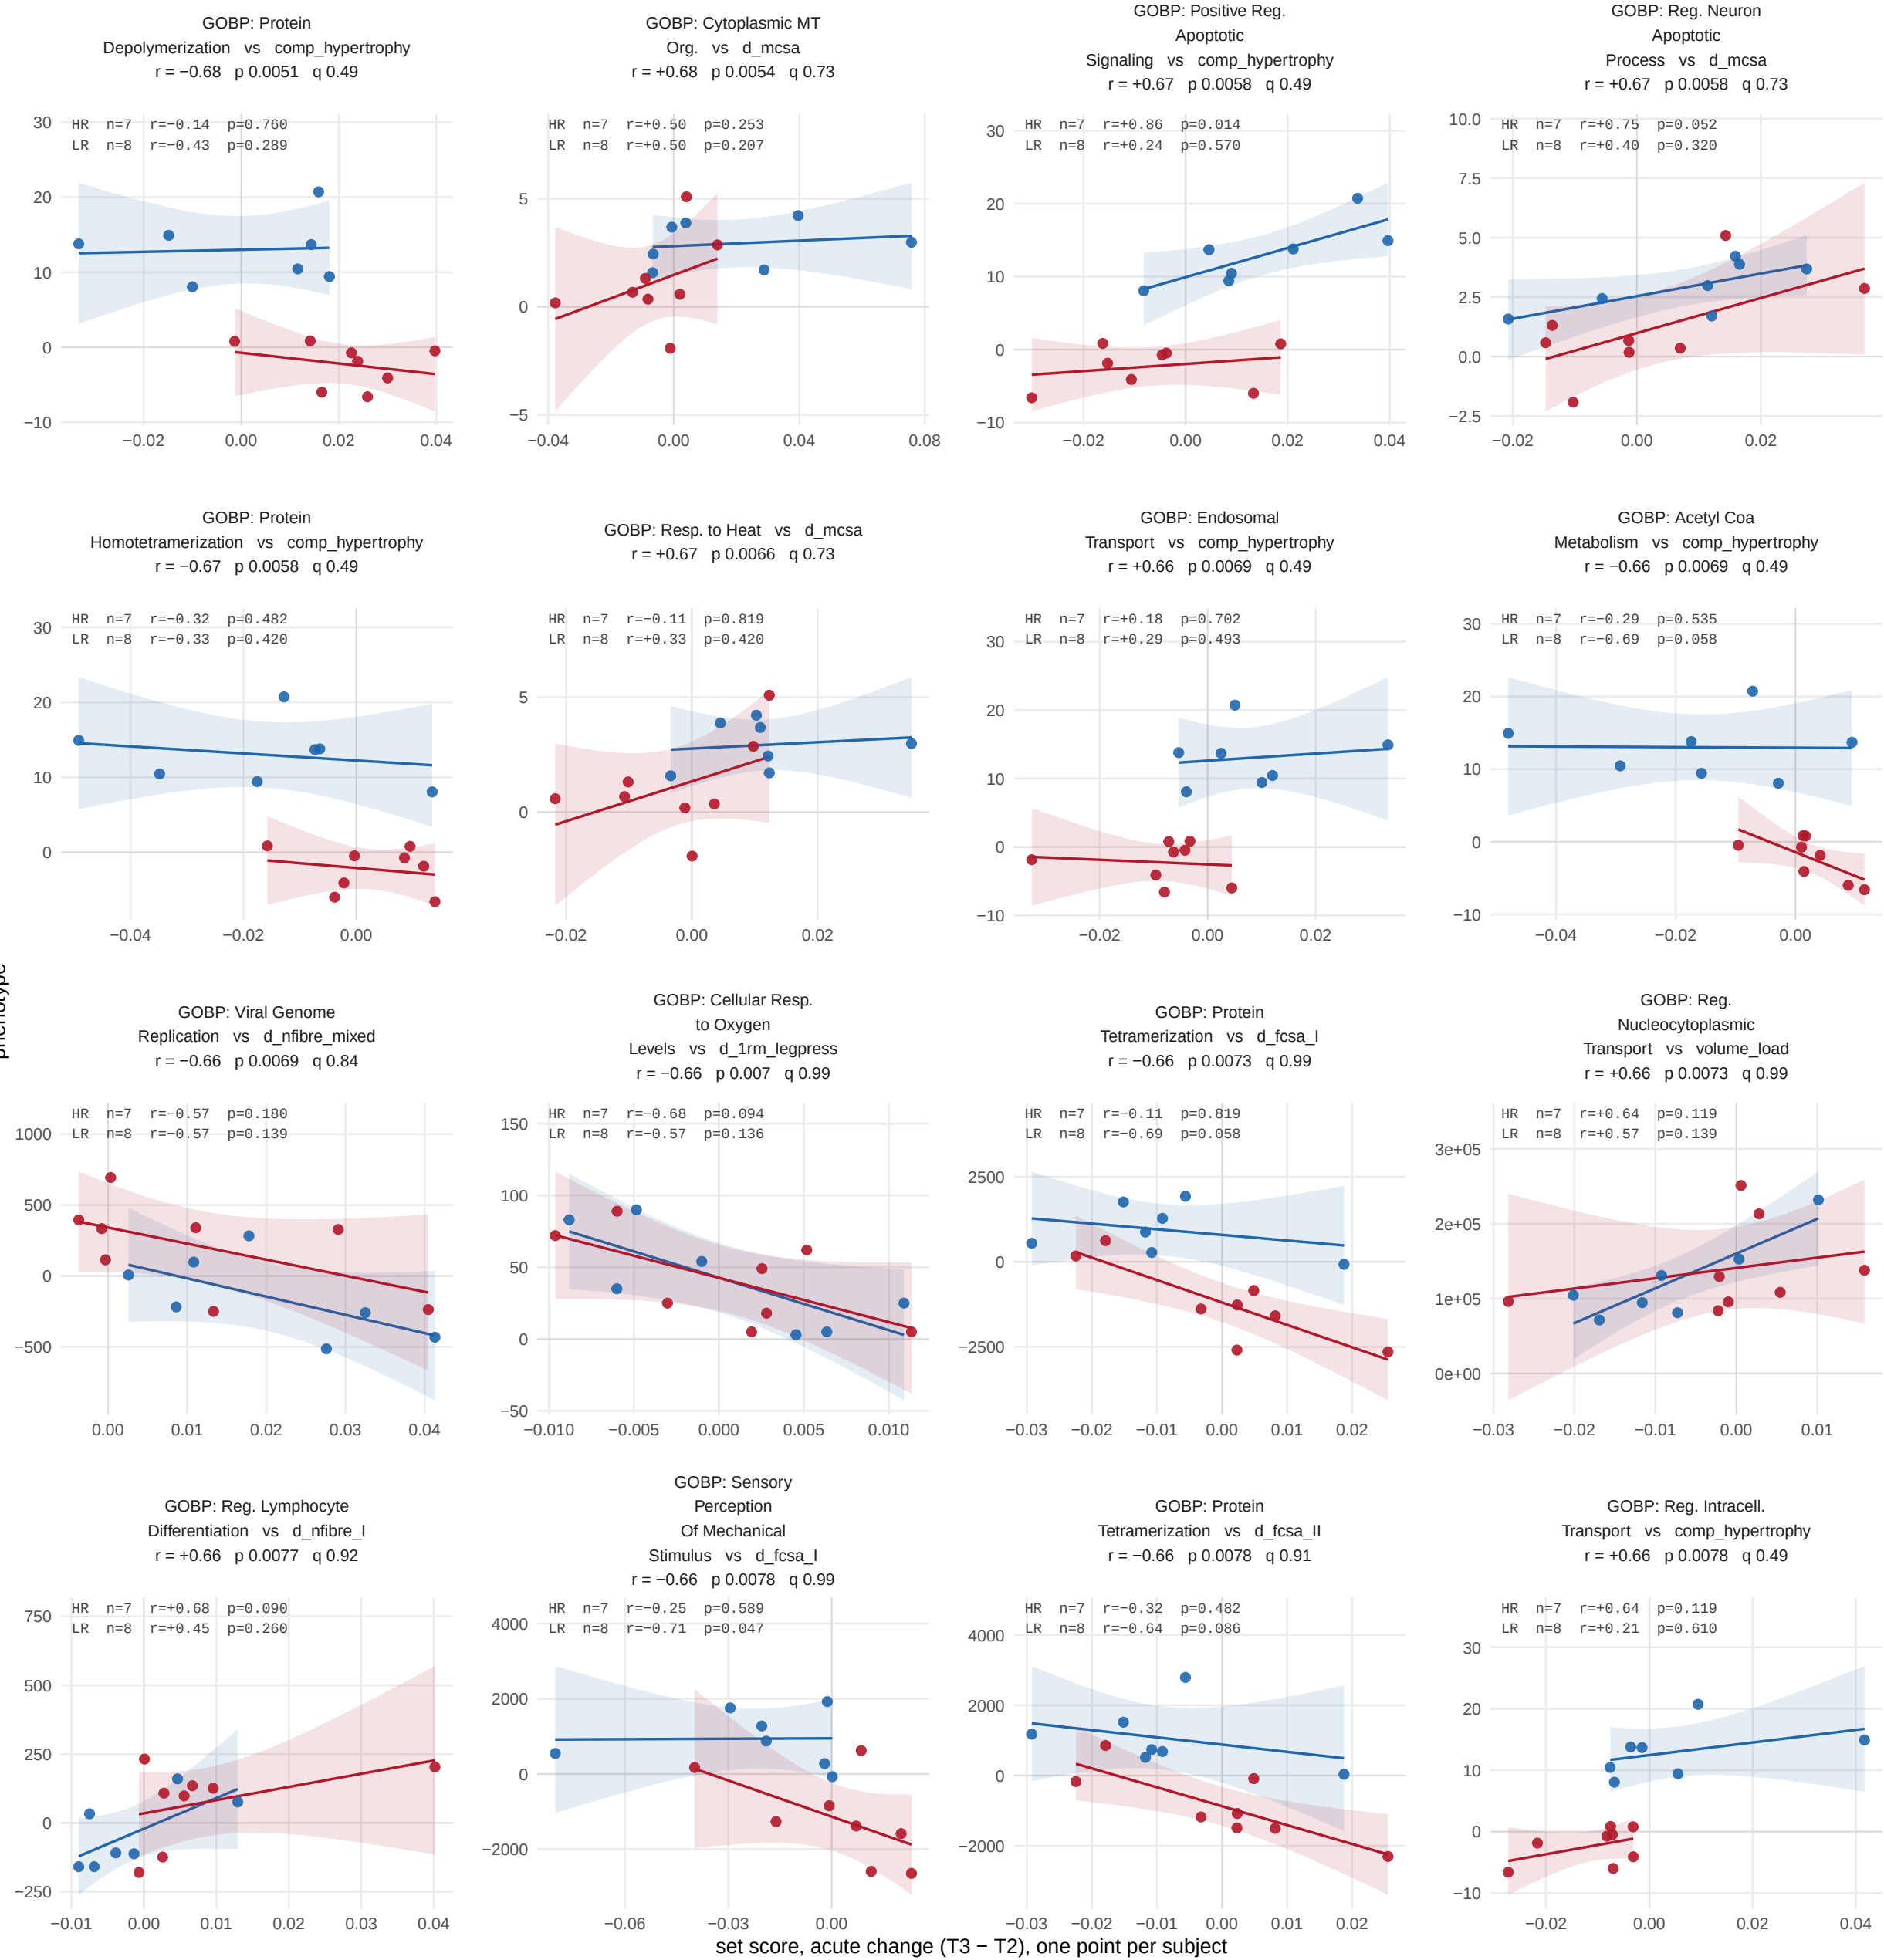


All 511 set-outcome pairs reaching nominal p, by collection then p. Lines are fitted within each arm; the header r is the pooled correlation, q from BH within collection, window and outcome. Nominal p, uncorrected. Each collection is read against its own expectation: GOBP 44.9 of 897, GO_Slim 2.9 of 58, Hallmark 1.7 of 33, KEGG_Legacy 3.1 of 62, Reactome 16.4 of 328.

Set score against phenotype, acute change (T3 – T2)

Spearman, subjects pooled across arms



HR LR

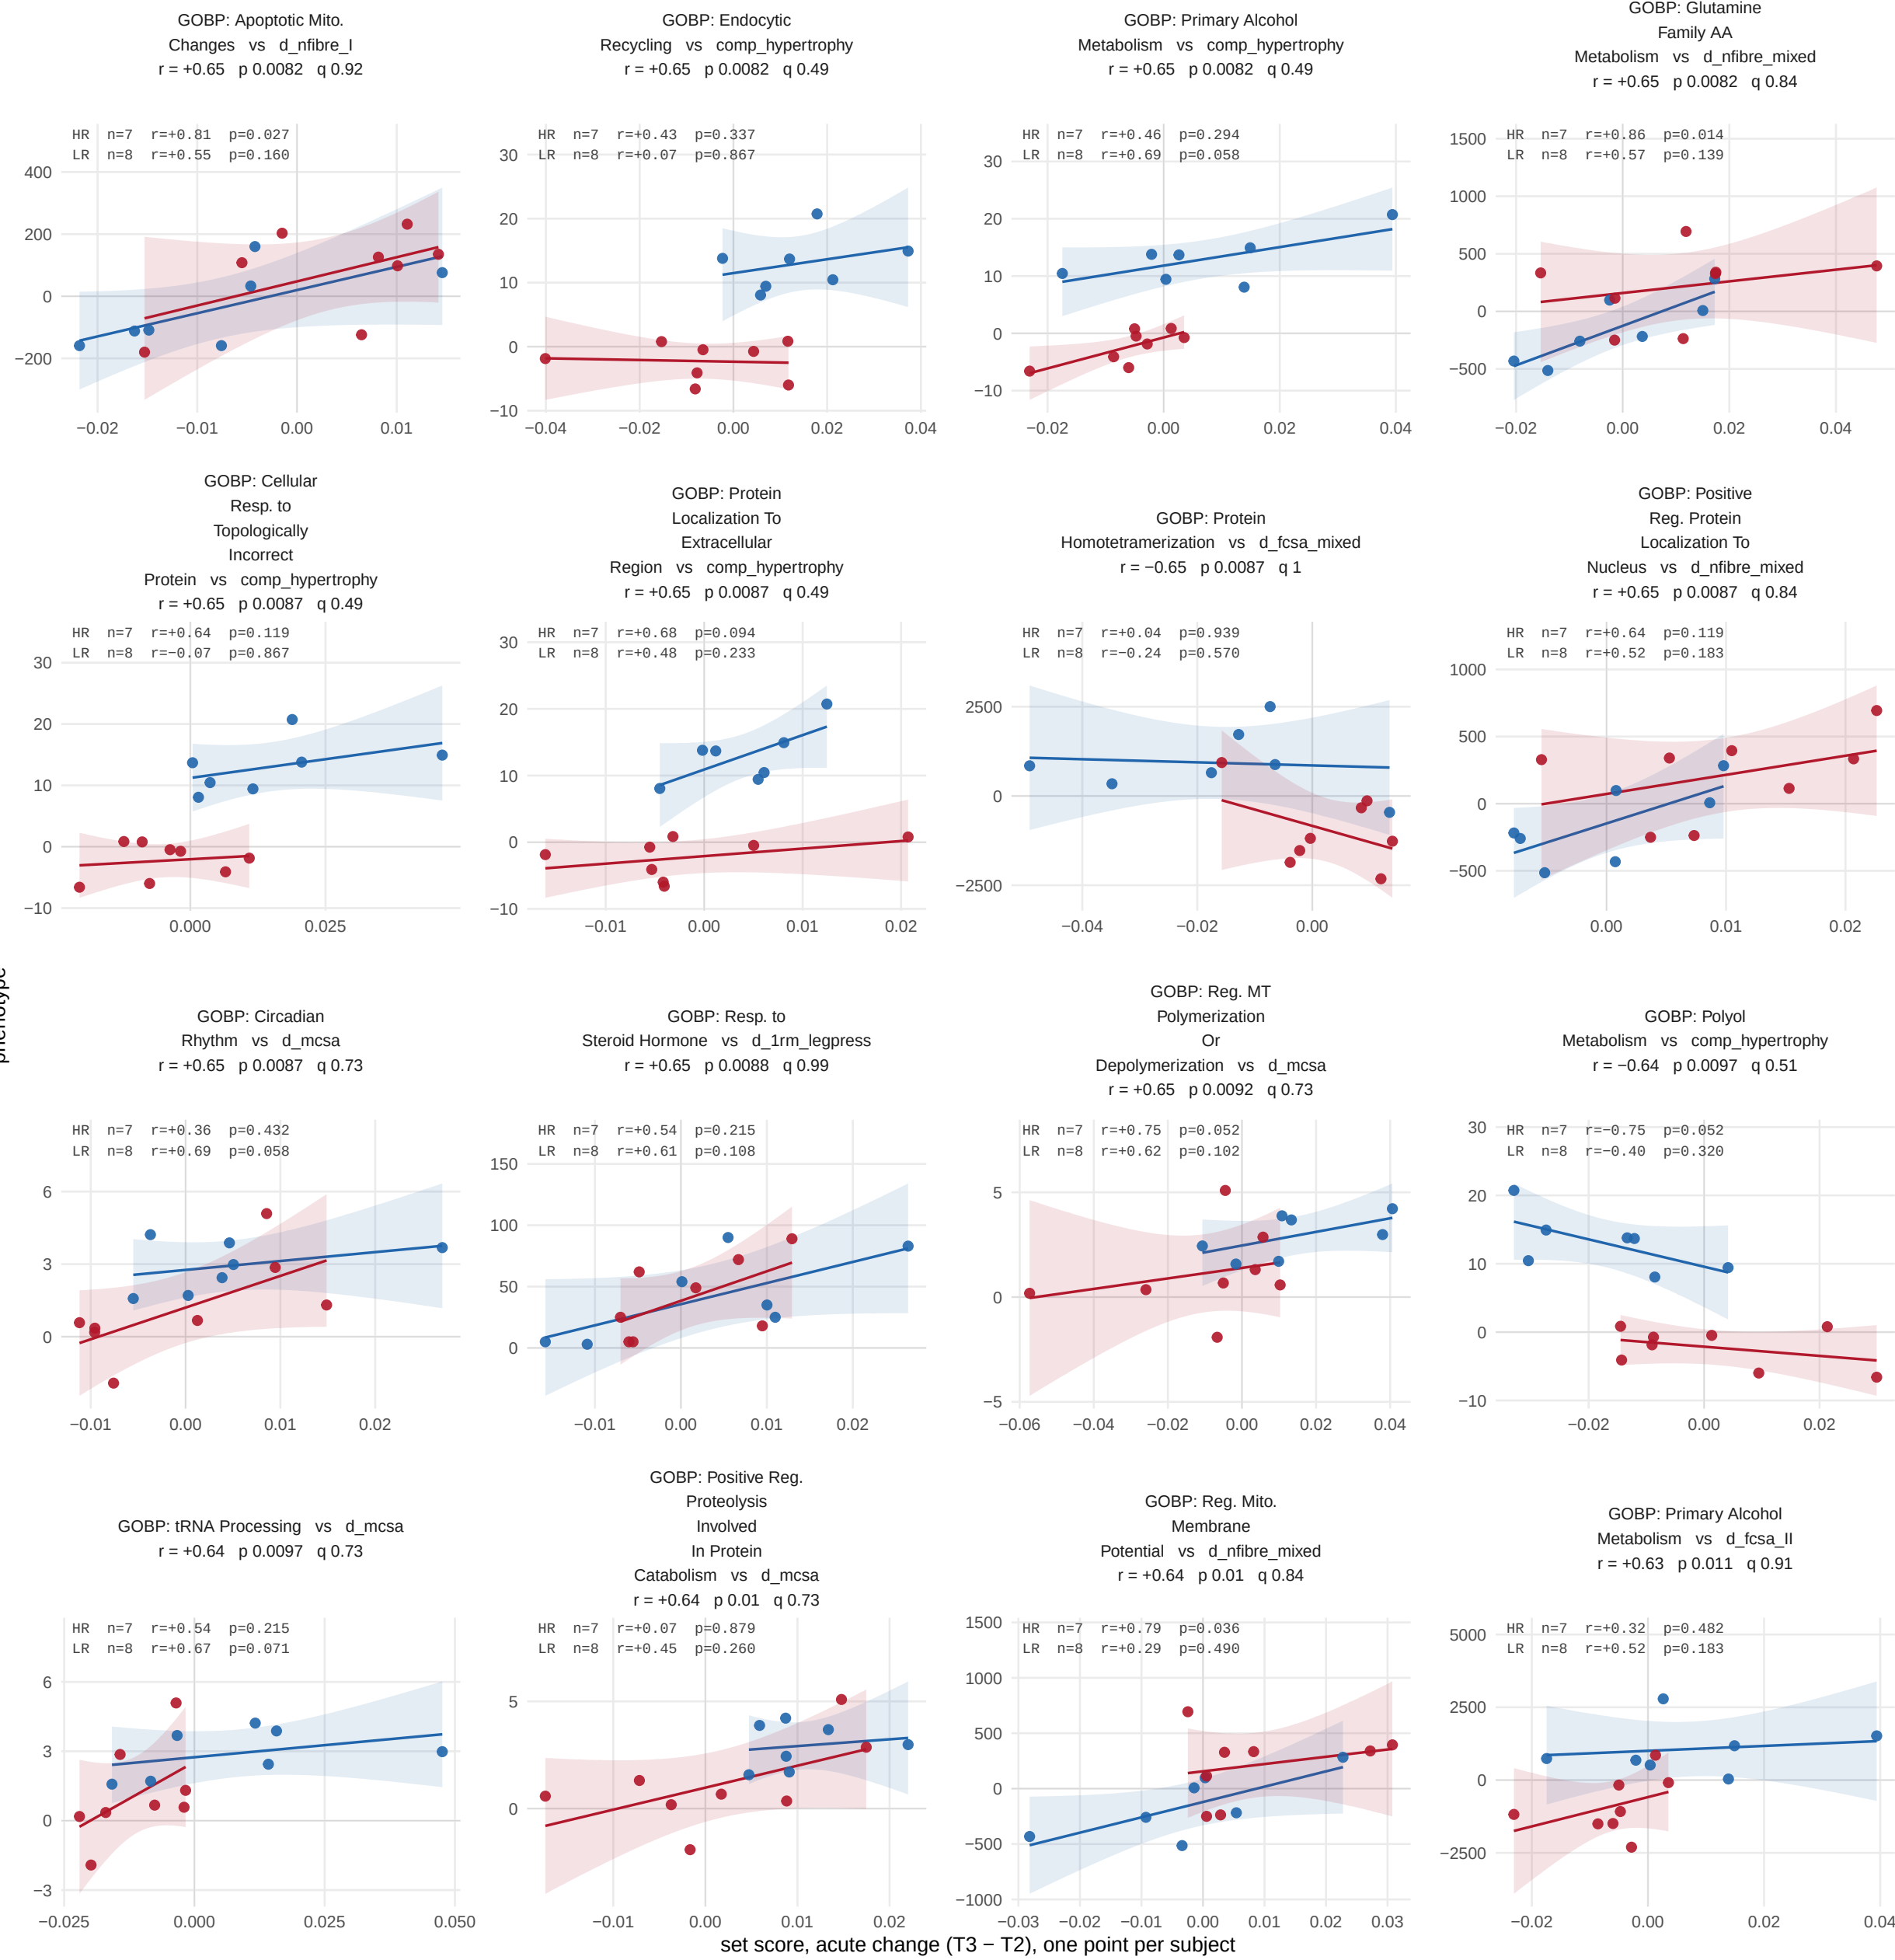

All 511 set-outcome pairs reaching nominal p, by collection then p. Lines are fitted within each arm; the header r is the pooled correlation, q from BH within collection, window and outcome. Nominal p, uncorrected. Each collection is read against its own expectation: GOBP 44.9 of 897, GO_Slim 2.9 of 58, Hallmark 1.7 of 33, KEGG_Legacy 3.1 of 62, Reactome 16.4 of 328.

Set score against phenotype, acute change (T3 – T2)



Spearman, subjects pooled across arms

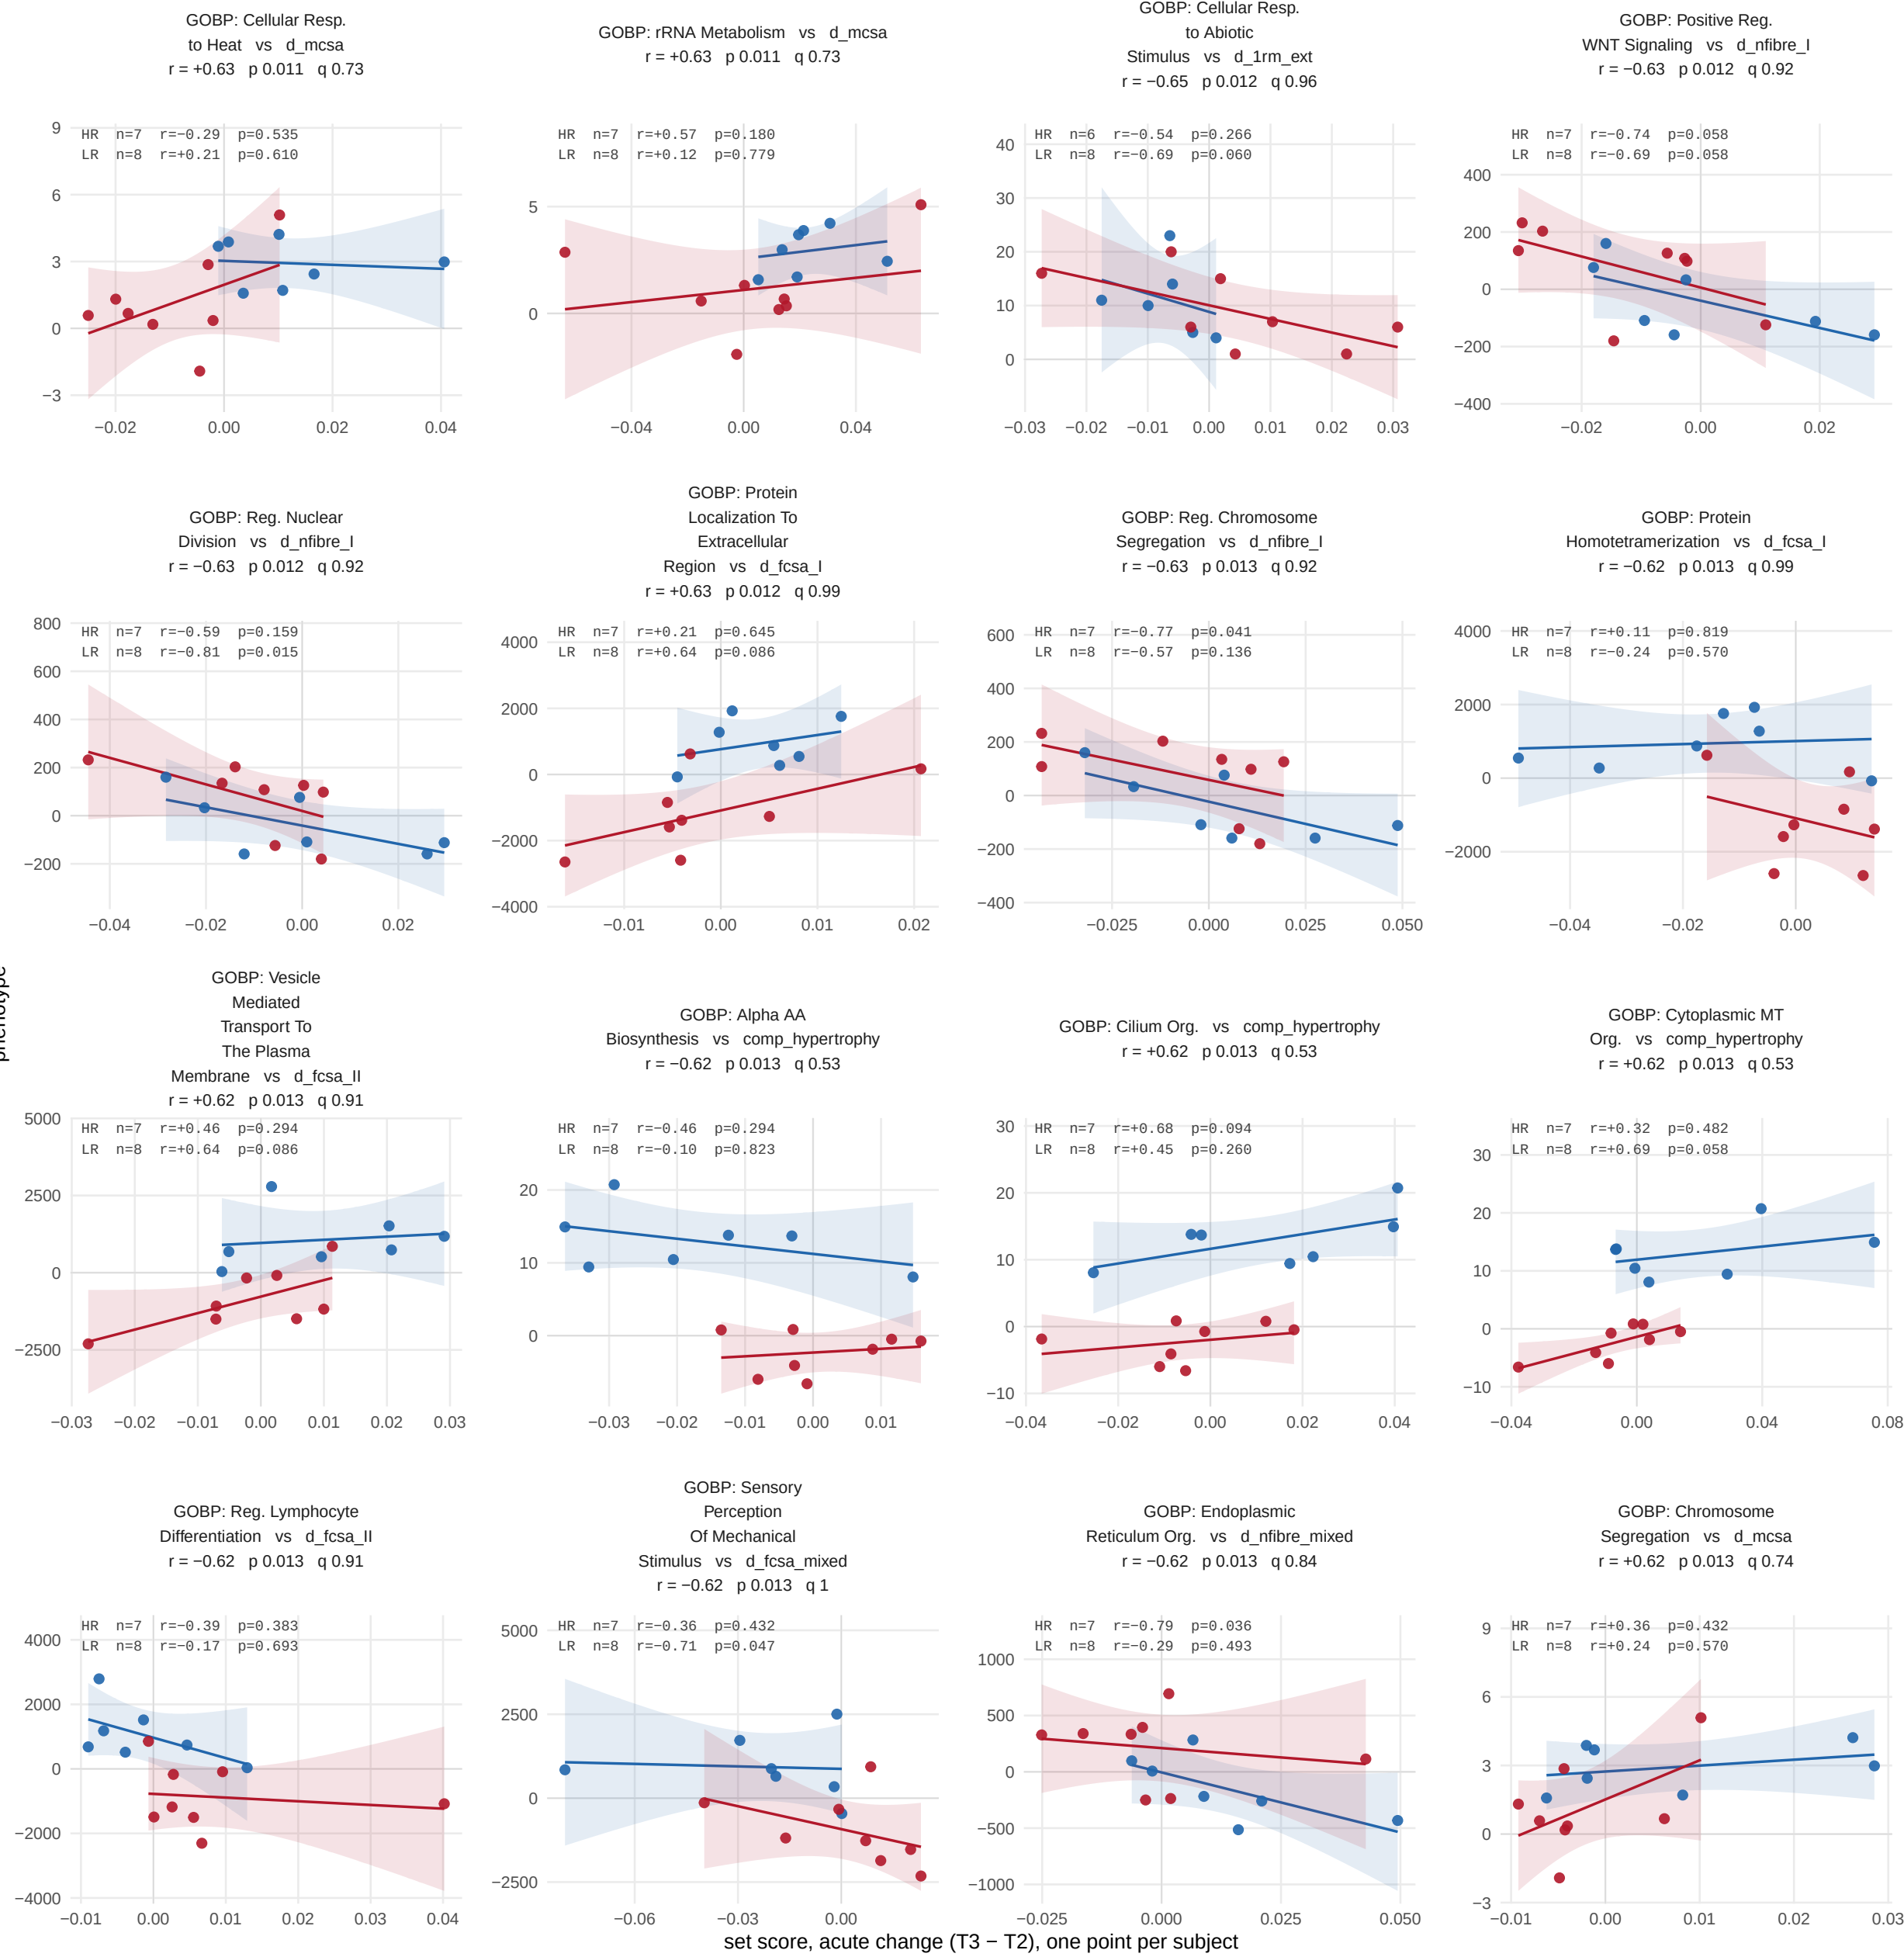

All 511 set-outcome pairs reaching nominal p, by collection then p. Lines are fitted within each arm; the header r is the pooled correlation, q from BH within collection, window and outcome. Nominal p, uncorrected. Each collection is read against its own expectation: GOBP 44.9 of 897, GO_Slim 2.9 of 58, Hallmark 1.7 of 33, KEGG_Legacy 3.1 of 62, Reactome 16.4 of 328.

Set score against phenotype, acute change (T3 – T2)



Spearman, subjects pooled across arms

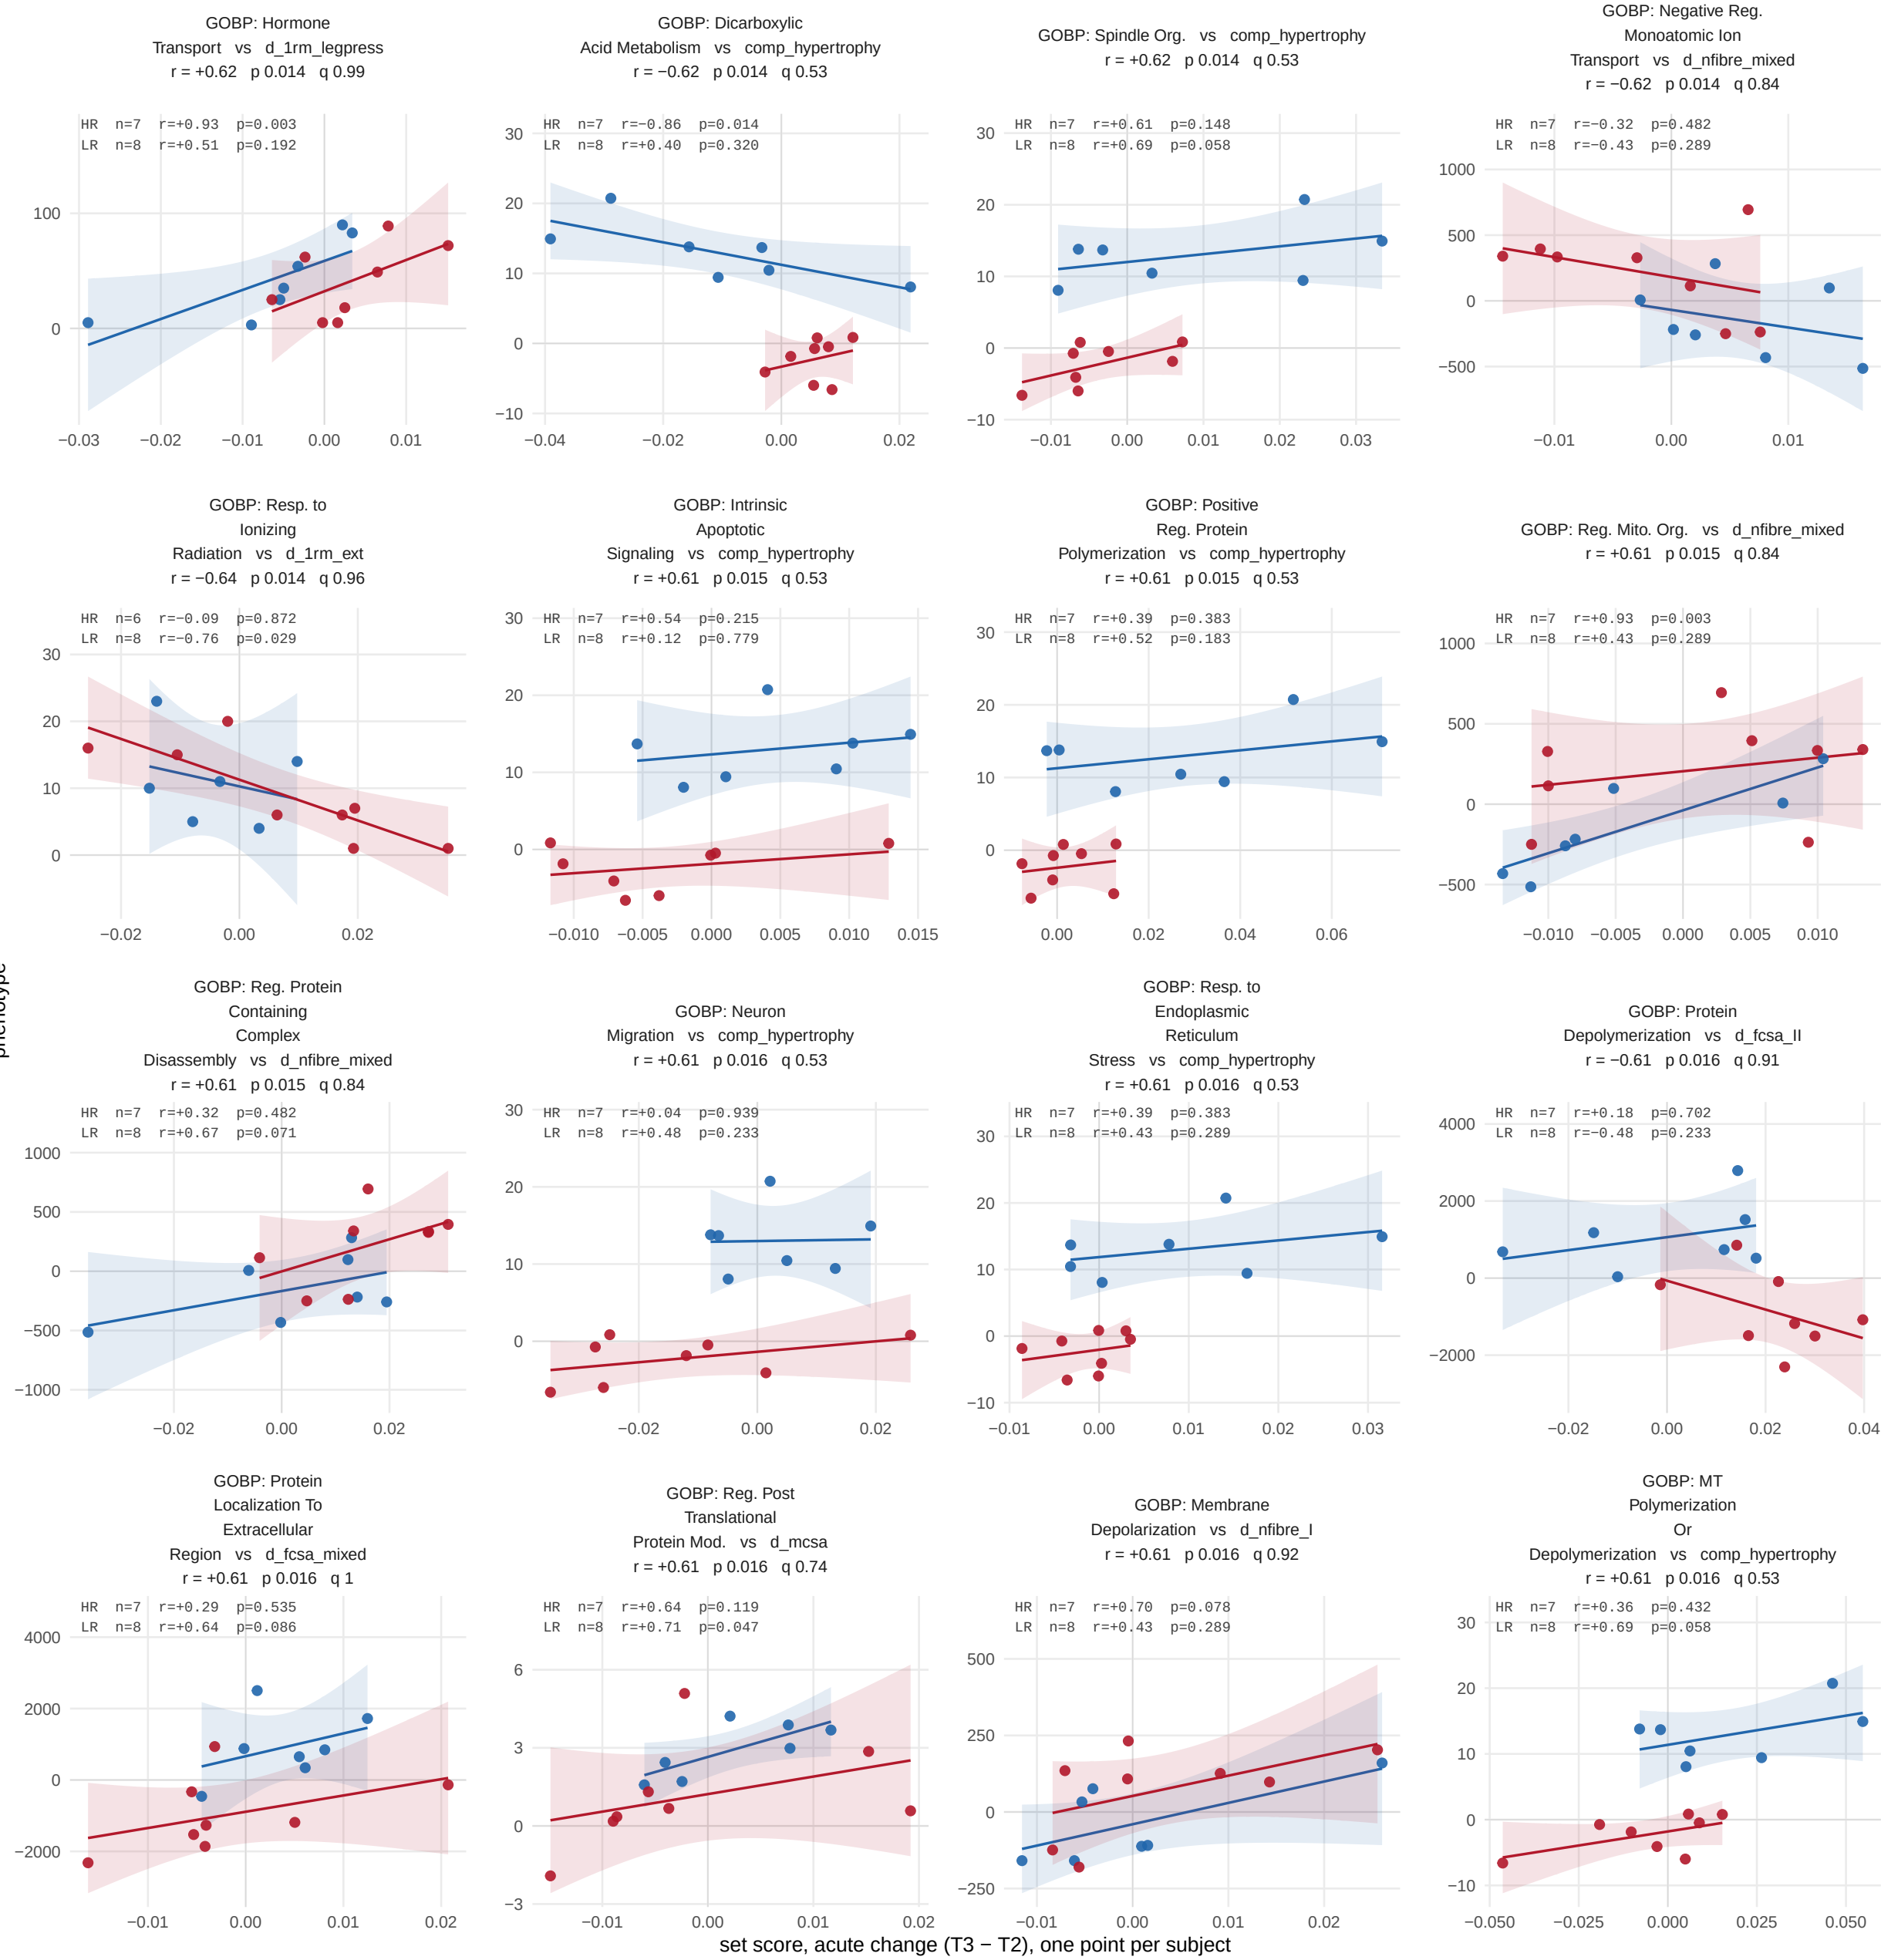

All 511 set-outcome pairs reaching nominal p, by collection then p. Lines are fitted within each arm; the header r is the pooled correlation, q from BH within collection, window and outcome. Nominal p, uncorrected. Each collection is read against its own expectation: GOBP 44.9 of 897, GO_Slim 2.9 of 58, Hallmark 1.7 of 33, KEGG_Legacy 3.1 of 62, Reactome 16.4 of 328.

Set score against phenotype, acute change (T3 – T2)


Spearman, subjects pooled across arms

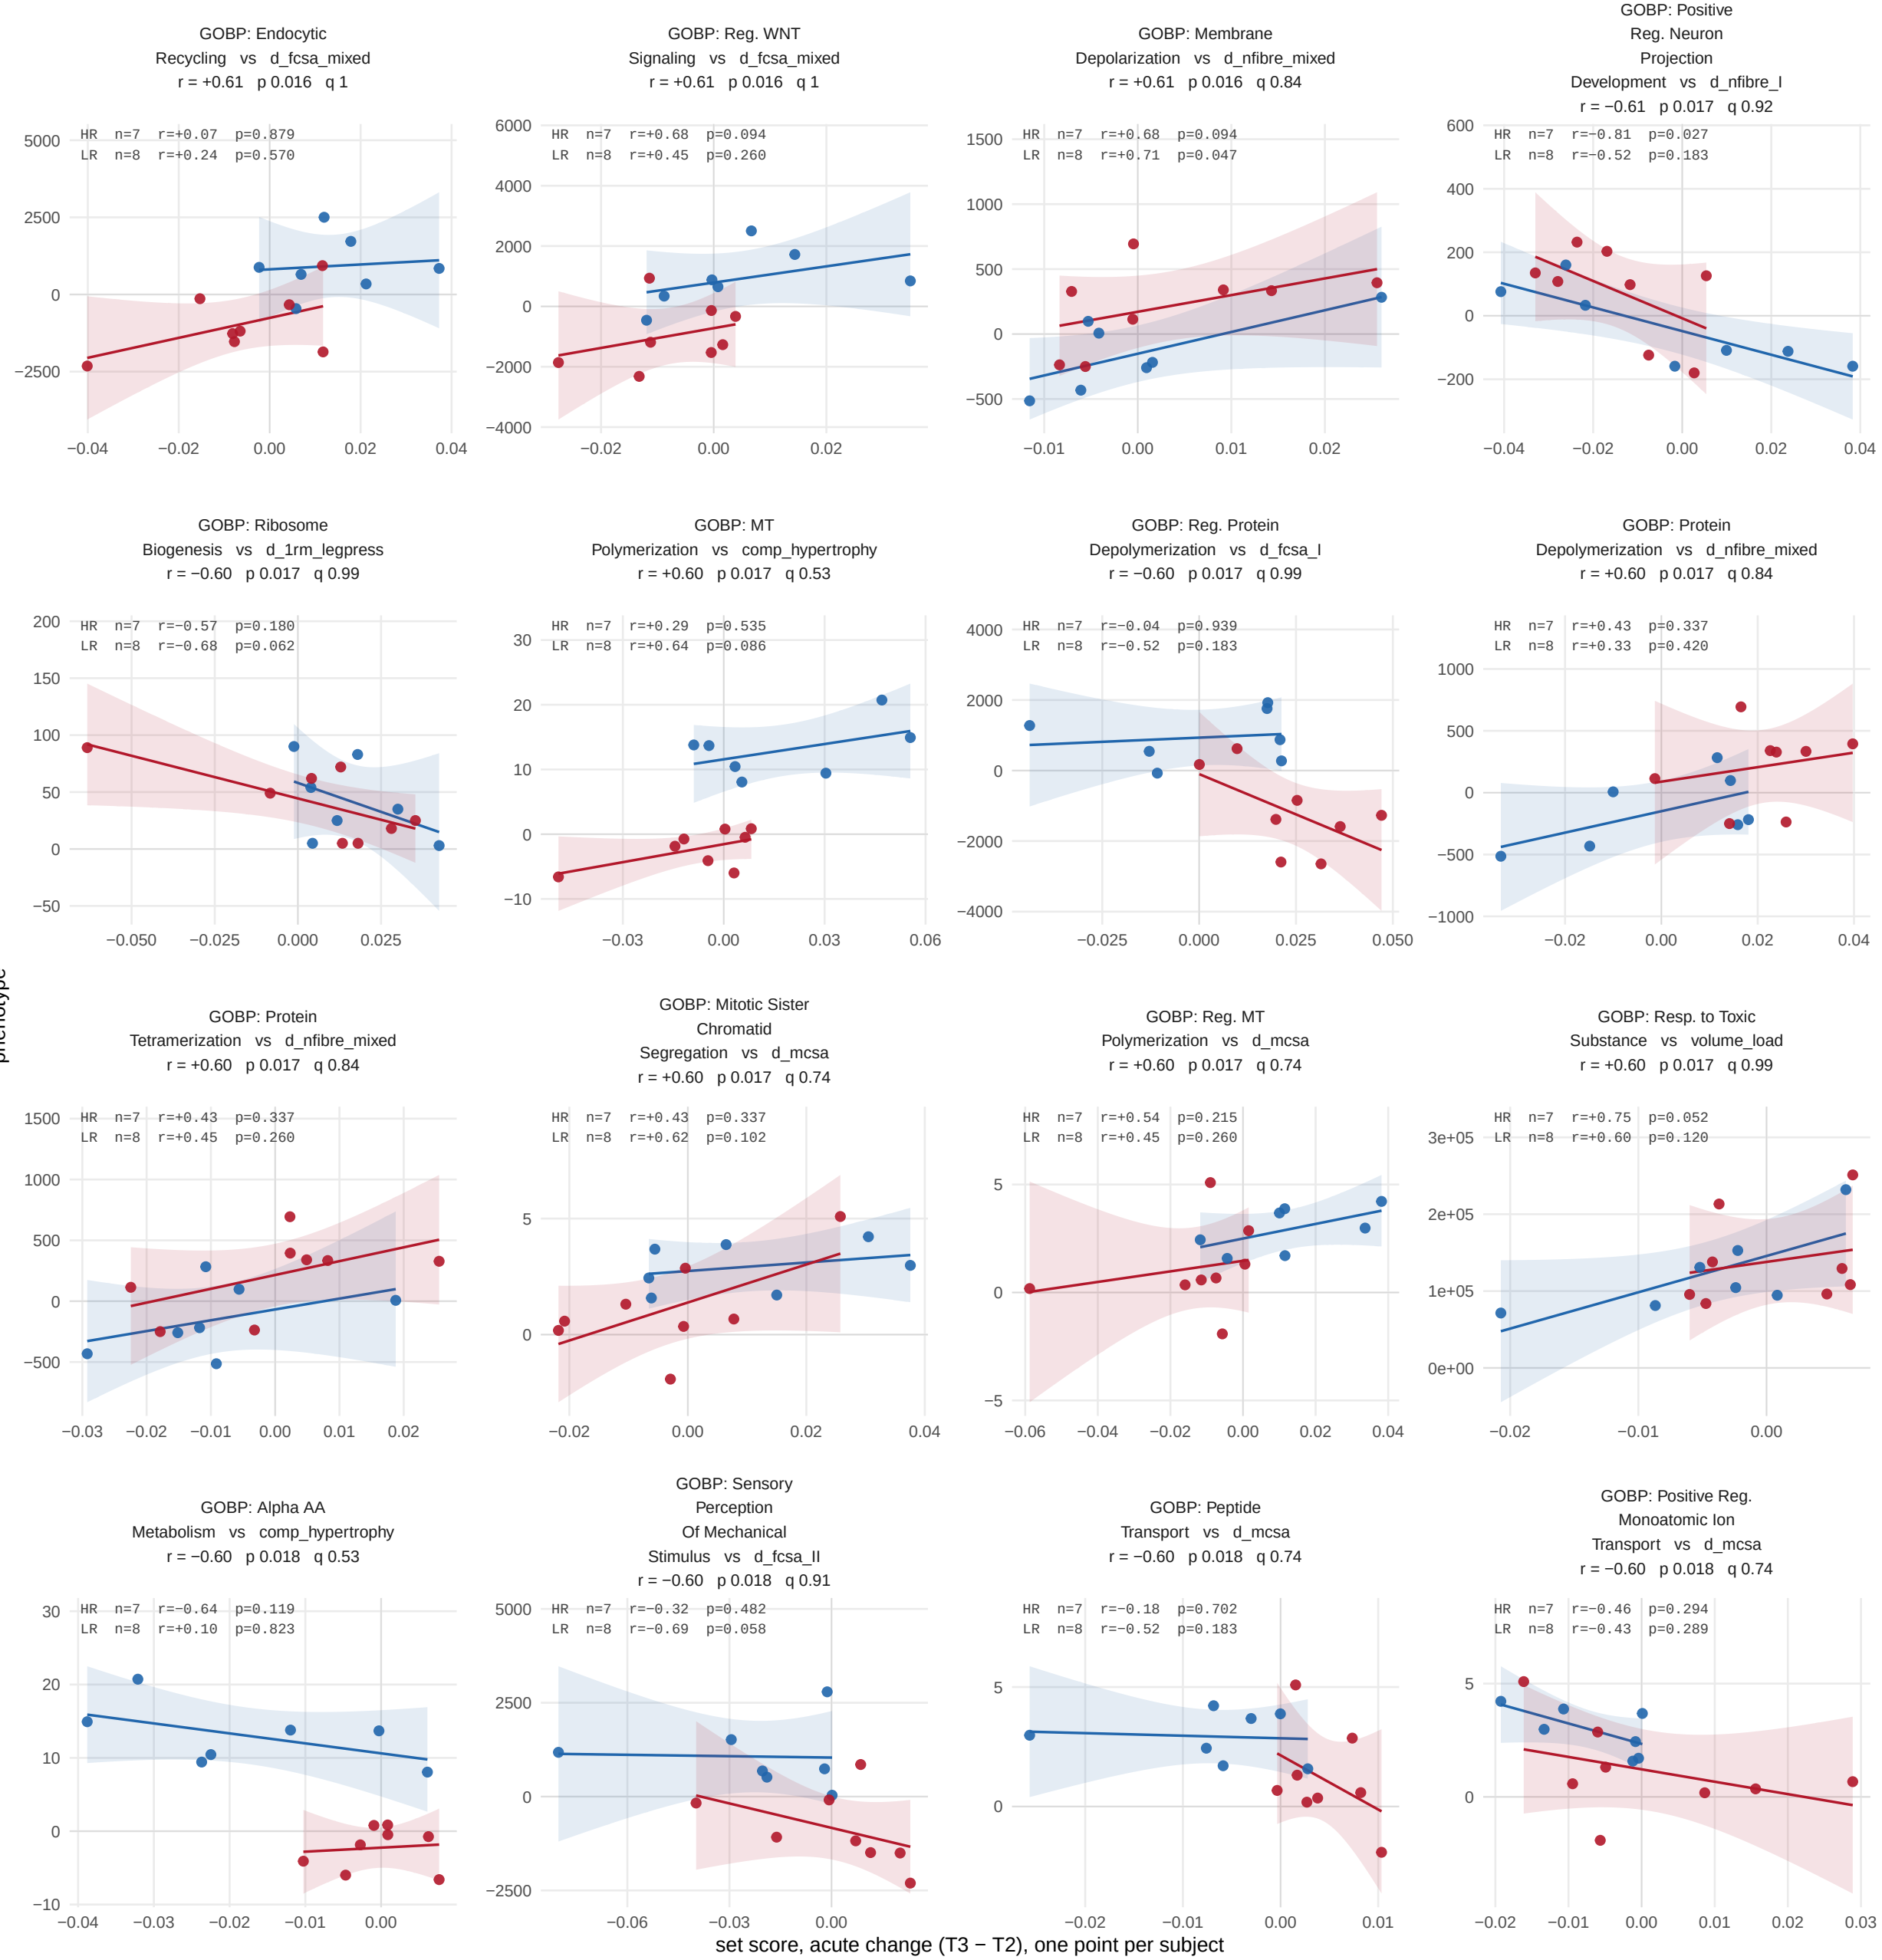

All 511 set-outcome pairs reaching nominal p, by collection then p. Lines are fitted within each arm; the header r is the pooled correlation, q from BH within collection, window and outcome. Nominal p, uncorrected. Each collection is read against its own expectation: GOBP 44.9 of 897, GO_Slim 2.9 of 58, Hallmark 1.7 of 33, KEGG_Legacy 3.1 of 62, Reactome 16.4 of 328.

Set score against phenotype, acute change (T3 – T2)



Spearman, subjects pooled across arms



All 511 set-outcome pairs reaching nominal p, by collection then p. Lines are fitted within each arm; the header r is the pooled correlation, q from BH within collection, window and outcome. Nominal p, uncorrected. Each collection is read against its own expectation: GOBP 44.9 of 897, GO_Slim 2.9 of 58, Hallmark 1.7 of 33, KEGG_Legacy 3.1 of 62, Reactome 16.4 of 328.

Set score against phenotype, acute change (T3 – T2)

Spearman, subjects pooled across arms

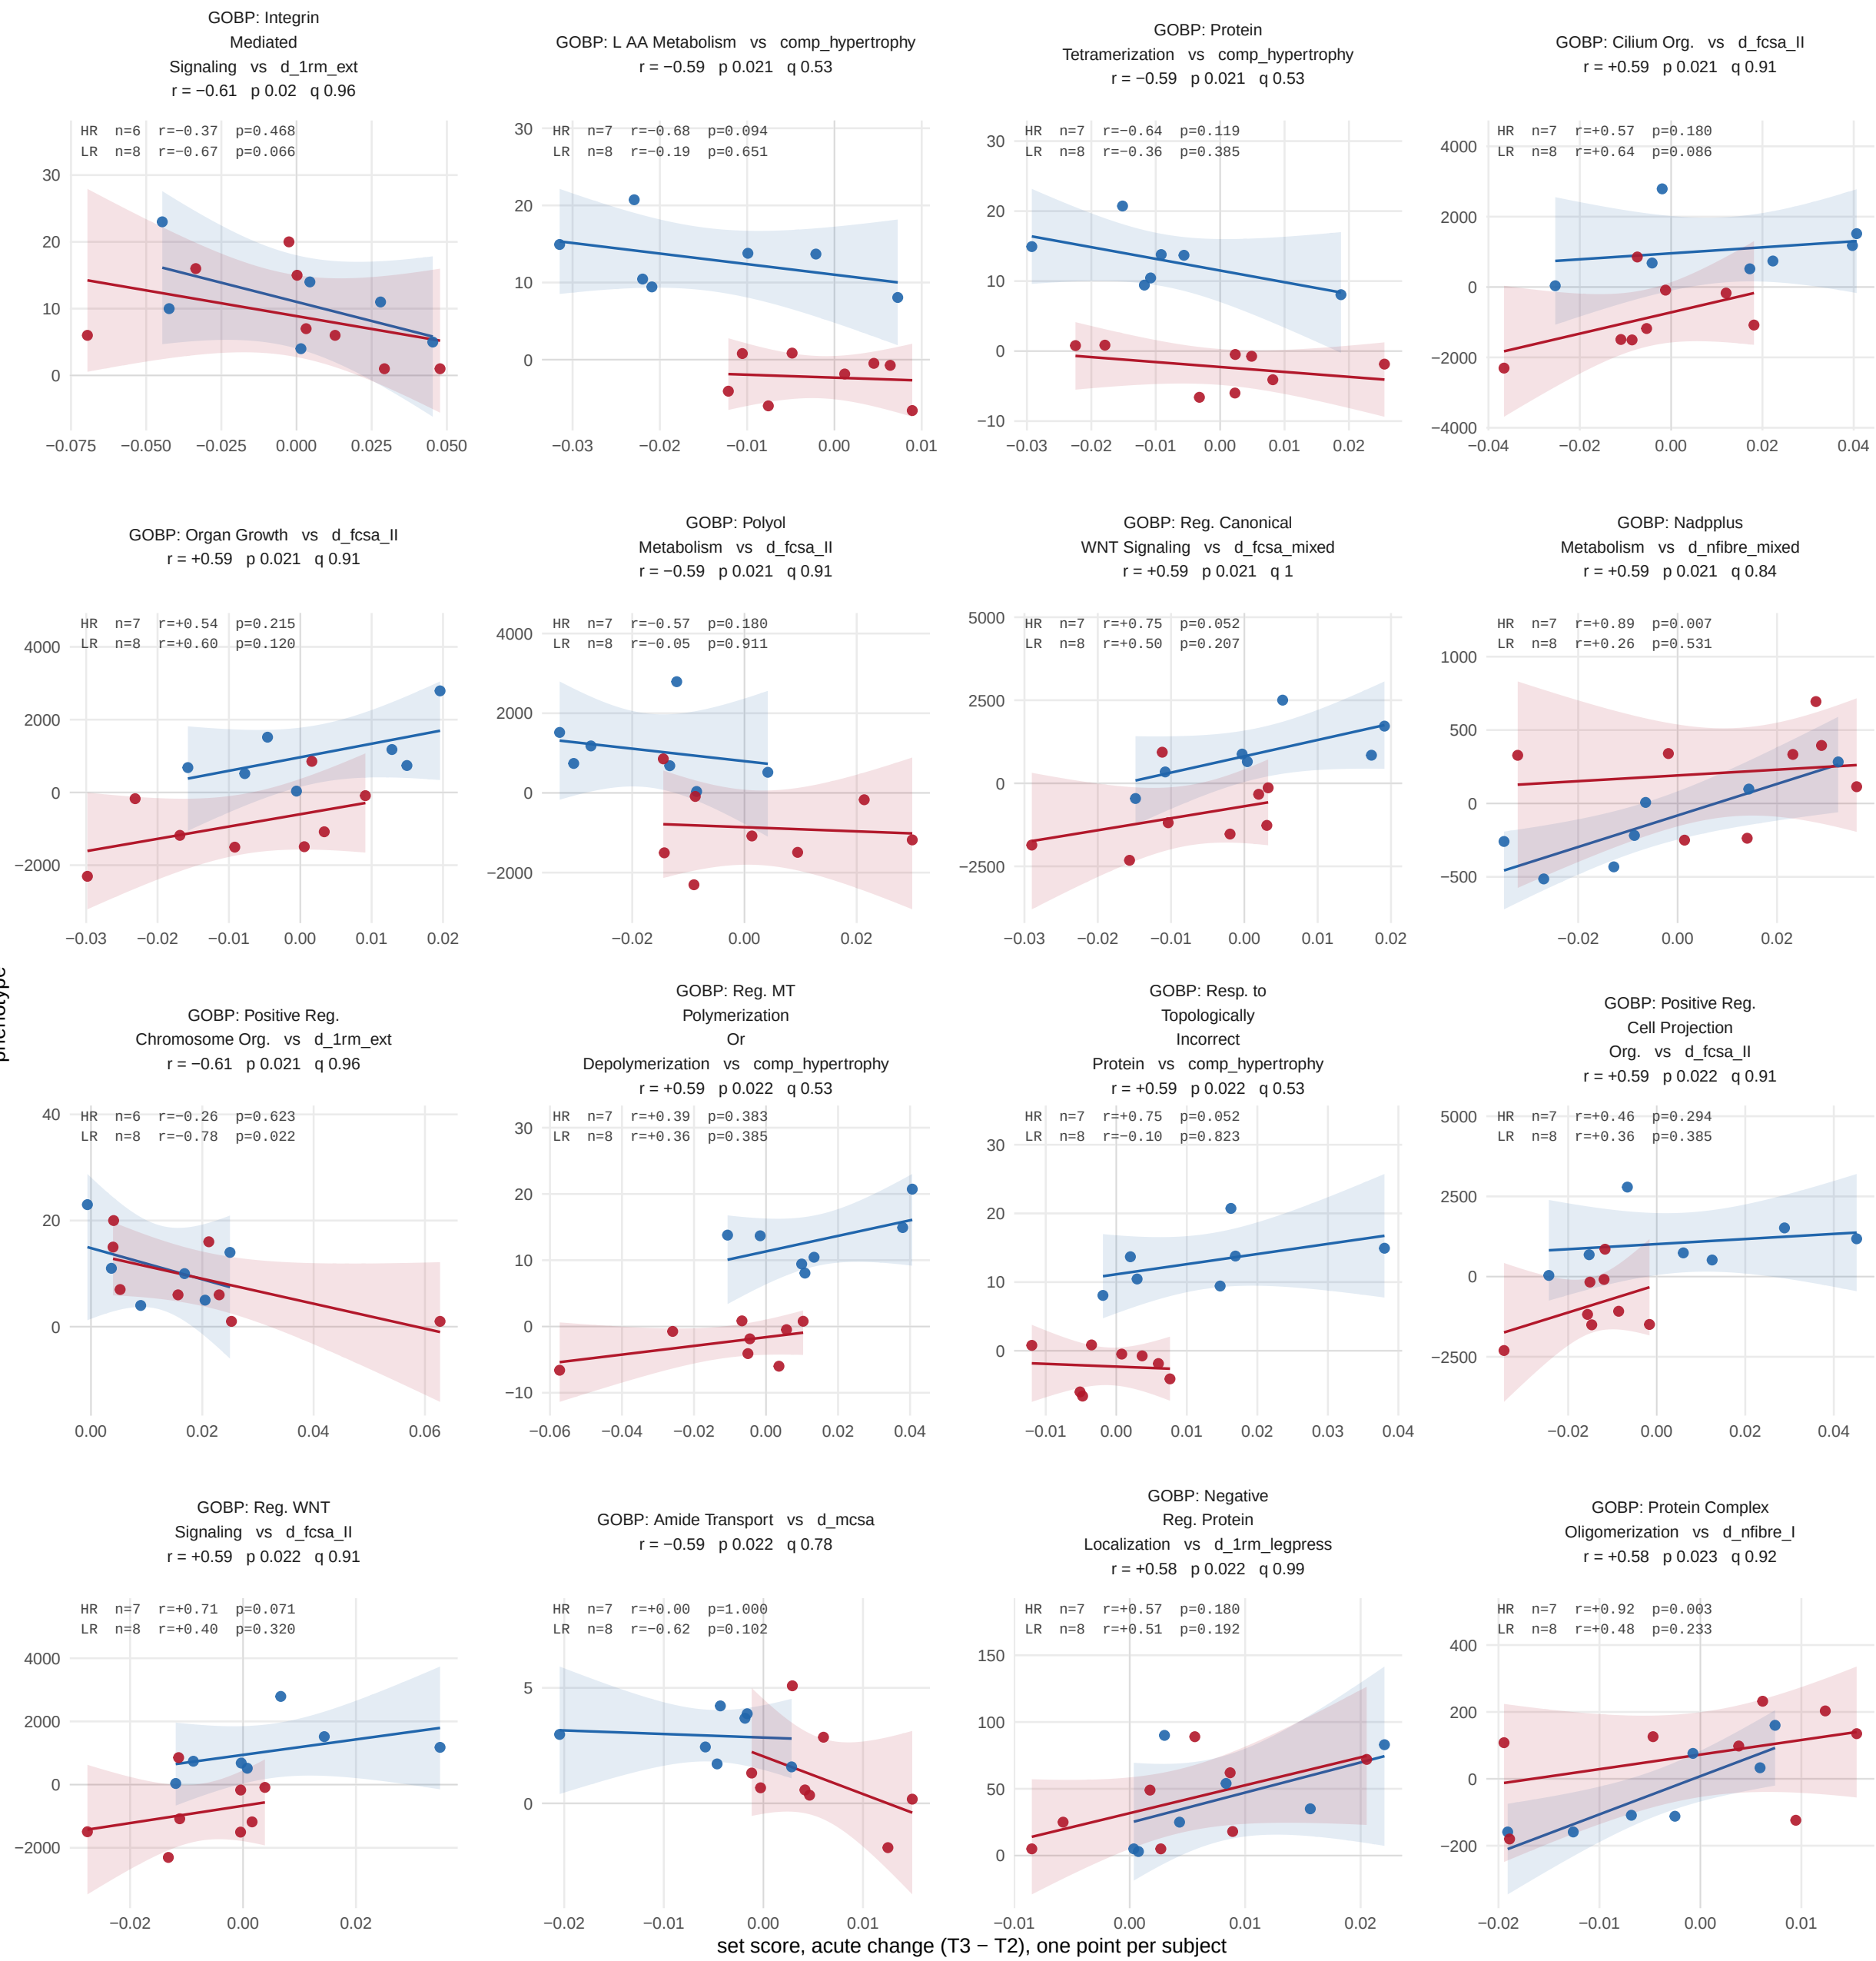


All 511 set-outcome pairs reaching nominal p, by collection then p. Lines are fitted within each arm; the header r is the pooled correlation, q from BH within collection, window and outcome. Nominal p, uncorrected. Each collection is read against its own expectation: GOBP 44.9 of 897, GO_Slim 2.9 of 58, Hallmark 1.7 of 33, KEGG_Legacy 3.1 of 62, Reactome 16.4 of 328.

Set score against phenotype, acute change (T3 – T2)

Spearman, subjects pooled across arms

HR LR

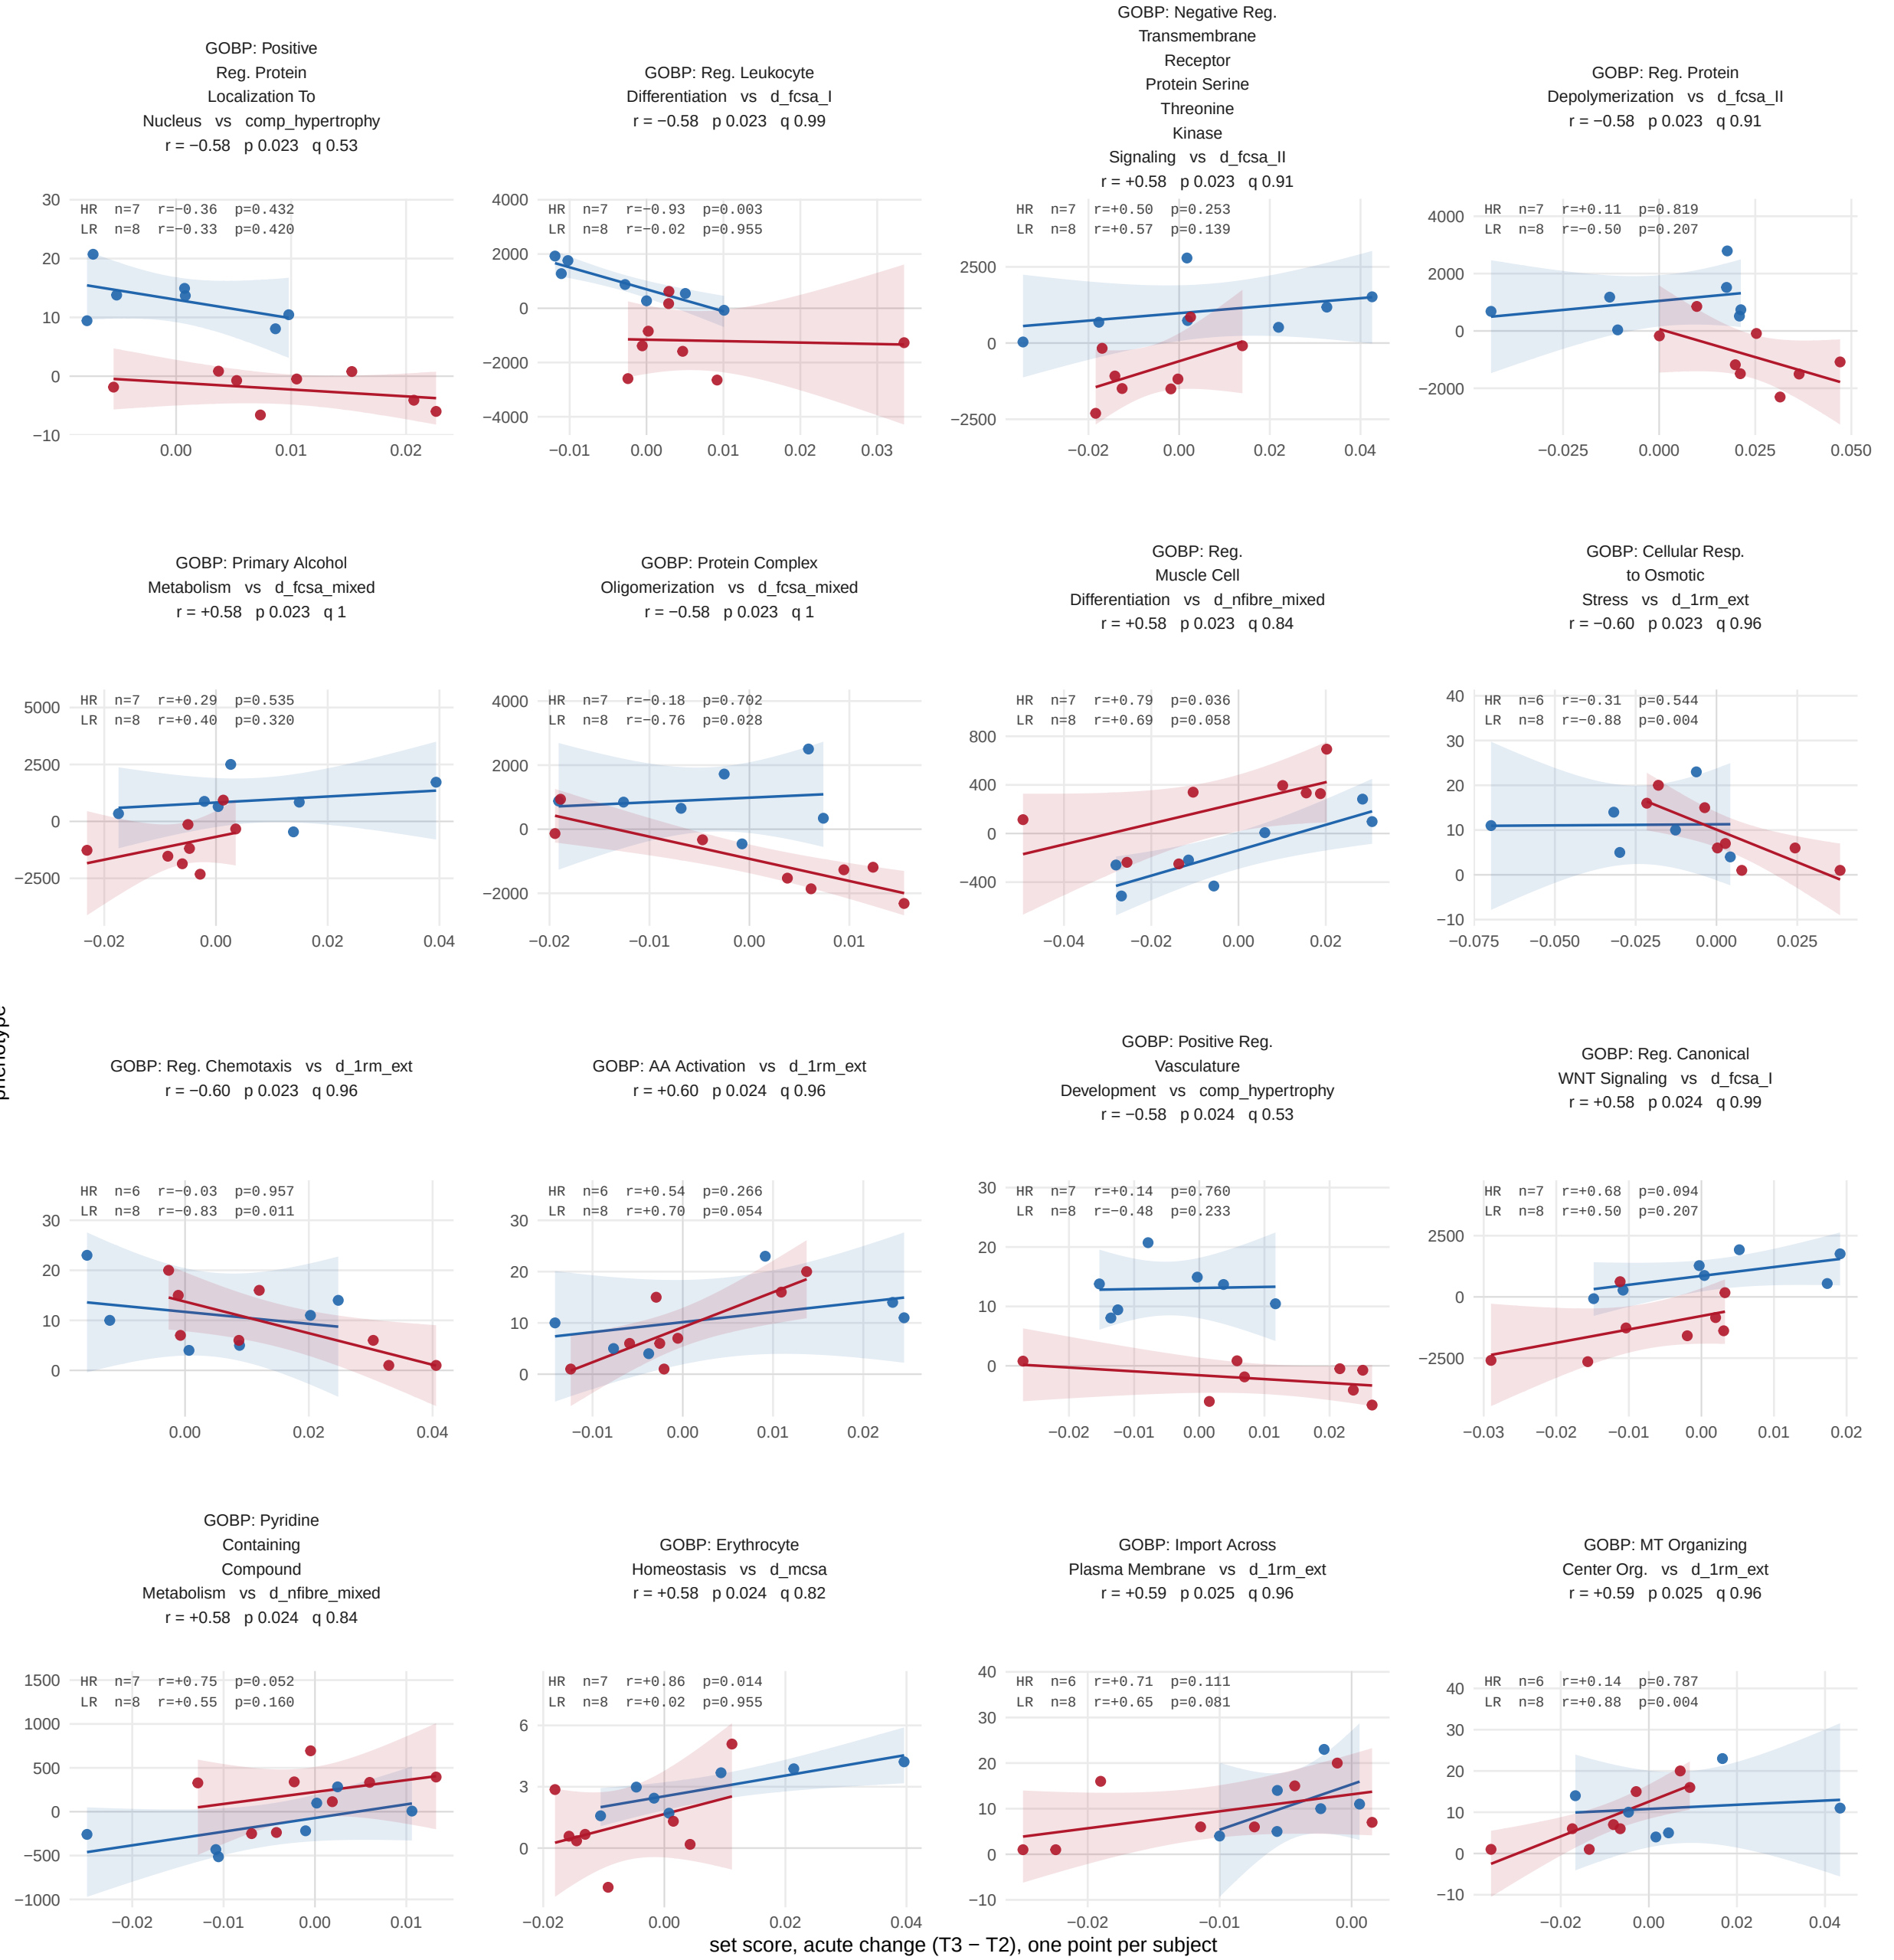


All 511 set-outcome pairs reaching nominal p, by collection then p. Lines are fitted within each arm; the header r is the pooled correlation, q from BH within collection, window and outcome. Nominal p, uncorrected. Each collection is read against its own expectation: GOBP 44.9 of 897, GO_Slim 2.9 of 58, Hallmark 1.7 of 33, KEGG_Legacy 3.1 of 62, Reactome 16.4 of 328.

Set score against phenotype, acute change (T3 – T2)

Spearman, subjects pooled across arms

HR LR

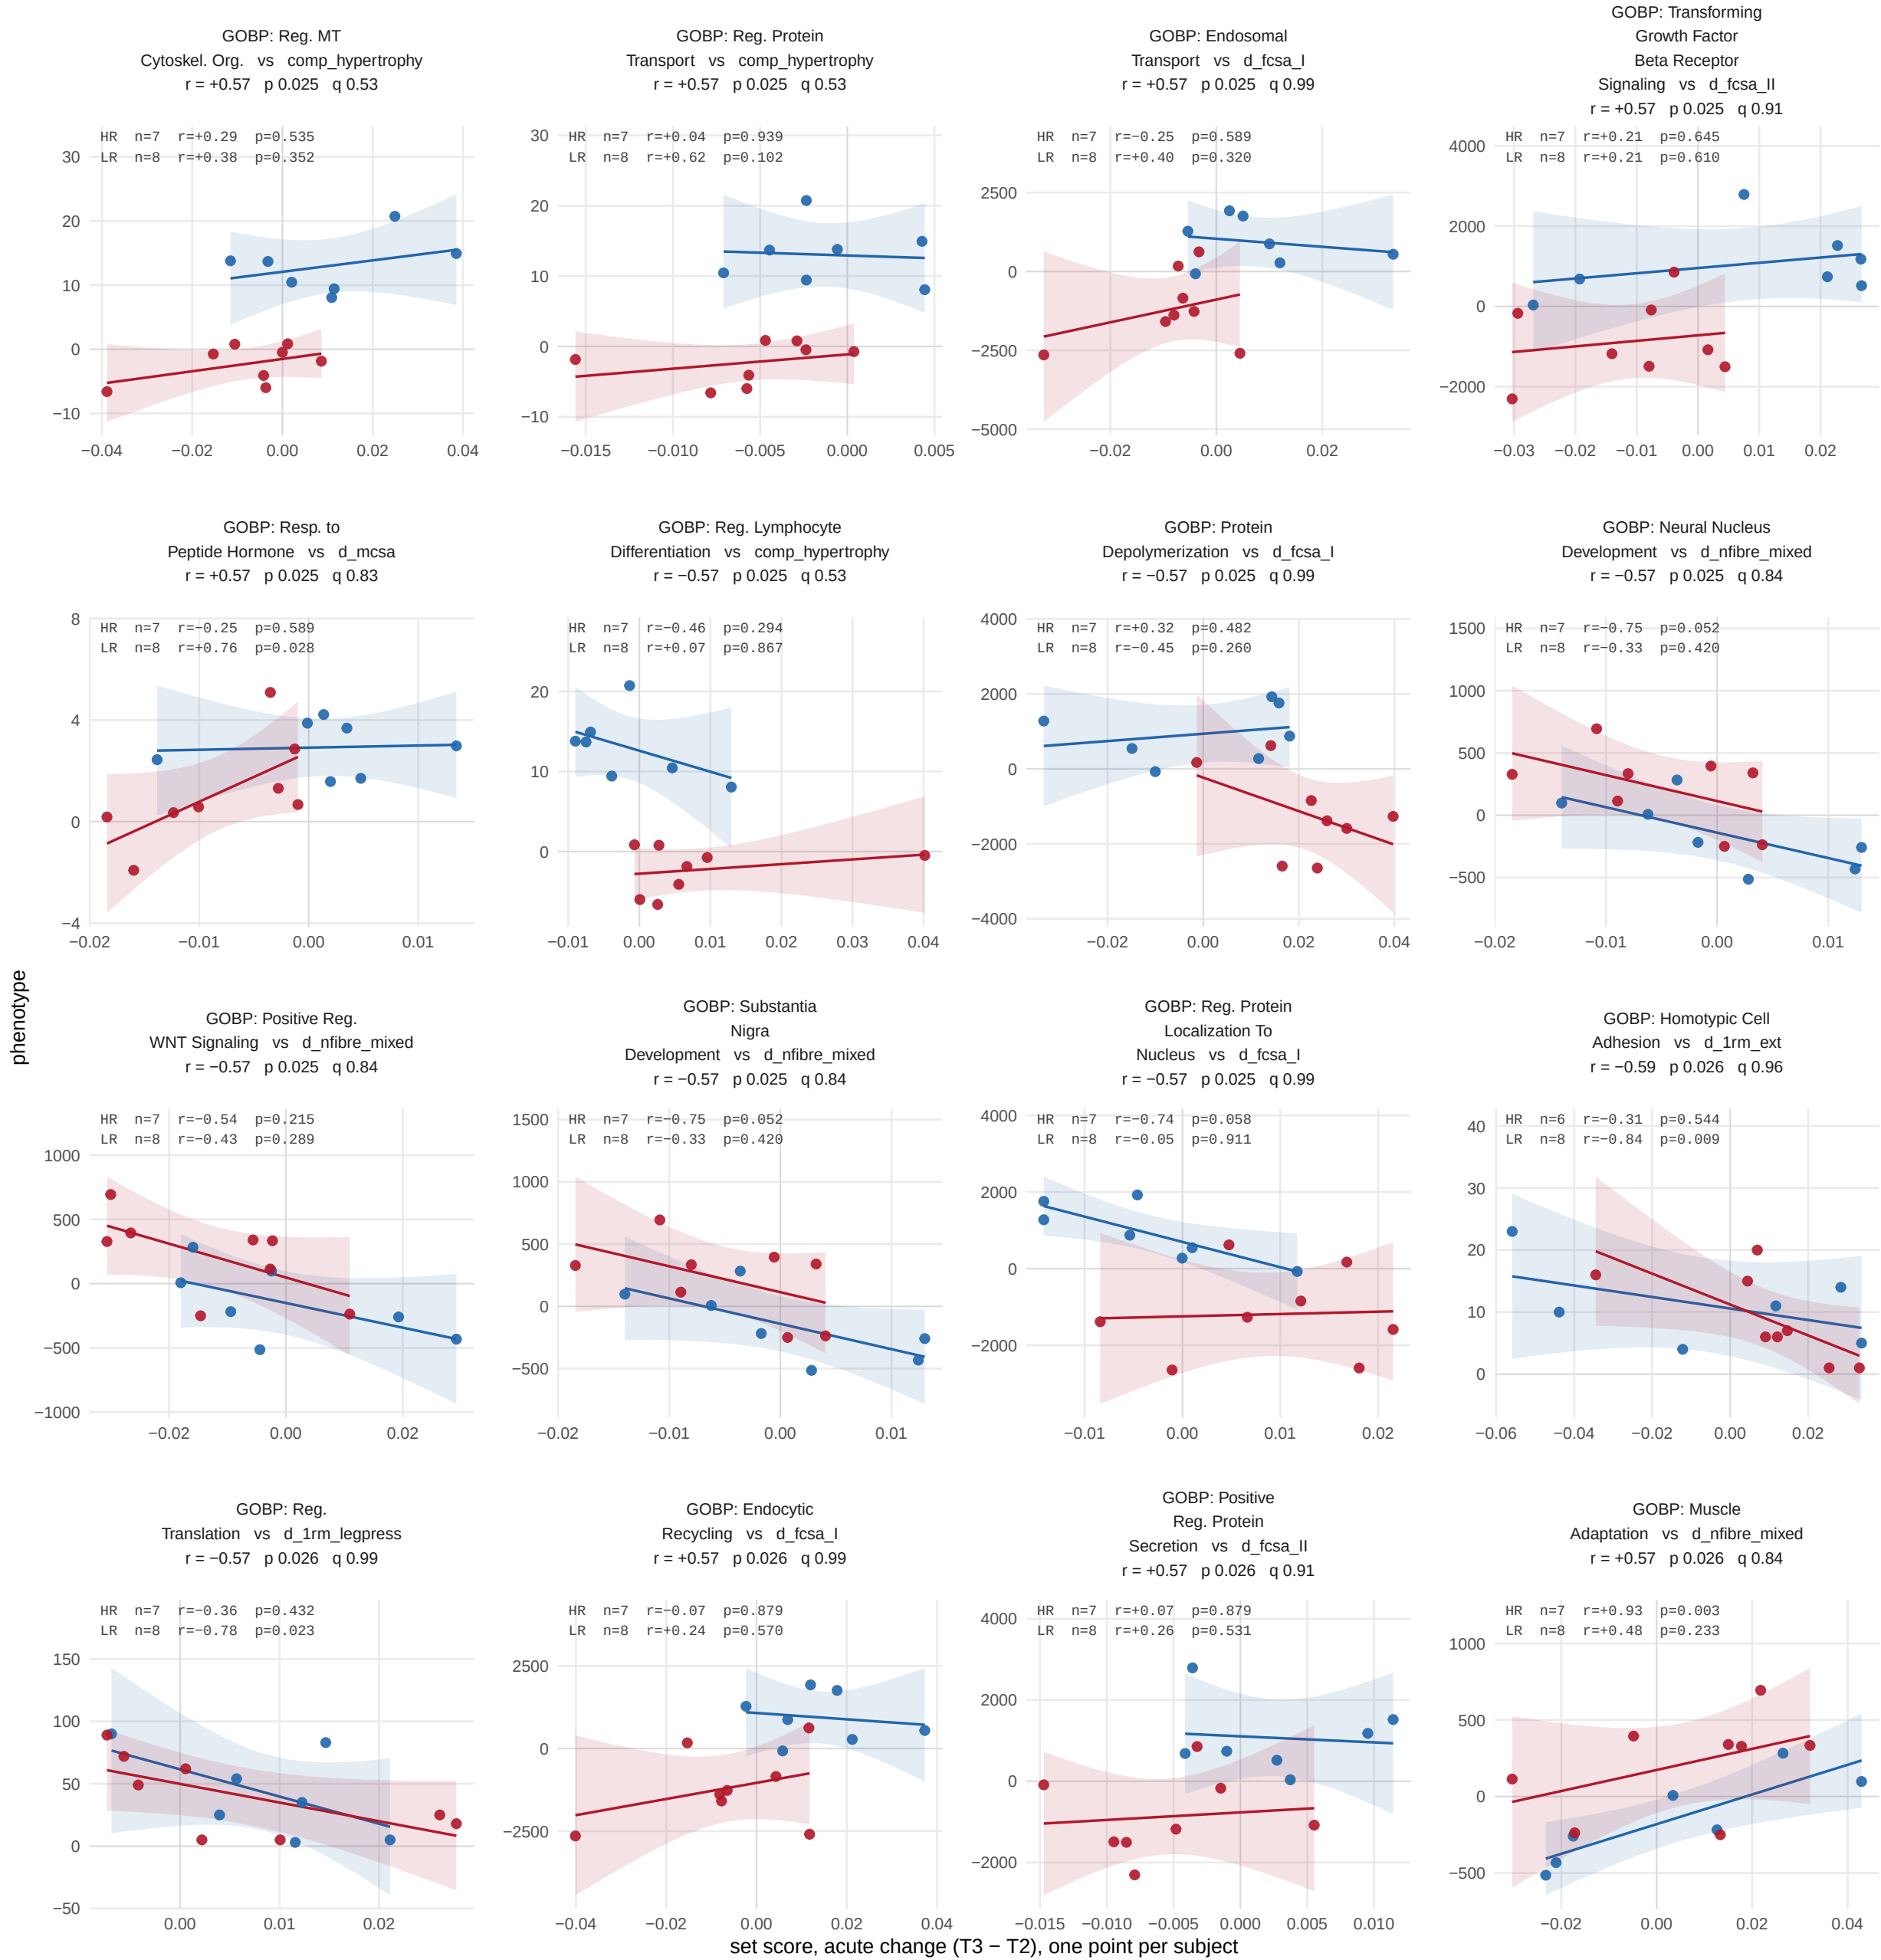


All 511 set-outcome pairs reaching nominal p, by collection then p. Lines are fitted within each arm; the header r is the pooled correlation, q from BH within collection, window and outcome. Nominal p, uncorrected. Each collection is read against its own expectation: GOBP 44.9 of 897, GO_Slim 2.9 of 58, Hallmark 1.7 of 33, KEGG_Legacy 3.1 of 62, Reactome 16.4 of 328.

Set score against phenotype, acute change (T3 – T2)

Spearman, subjects pooled across arms

HR LR

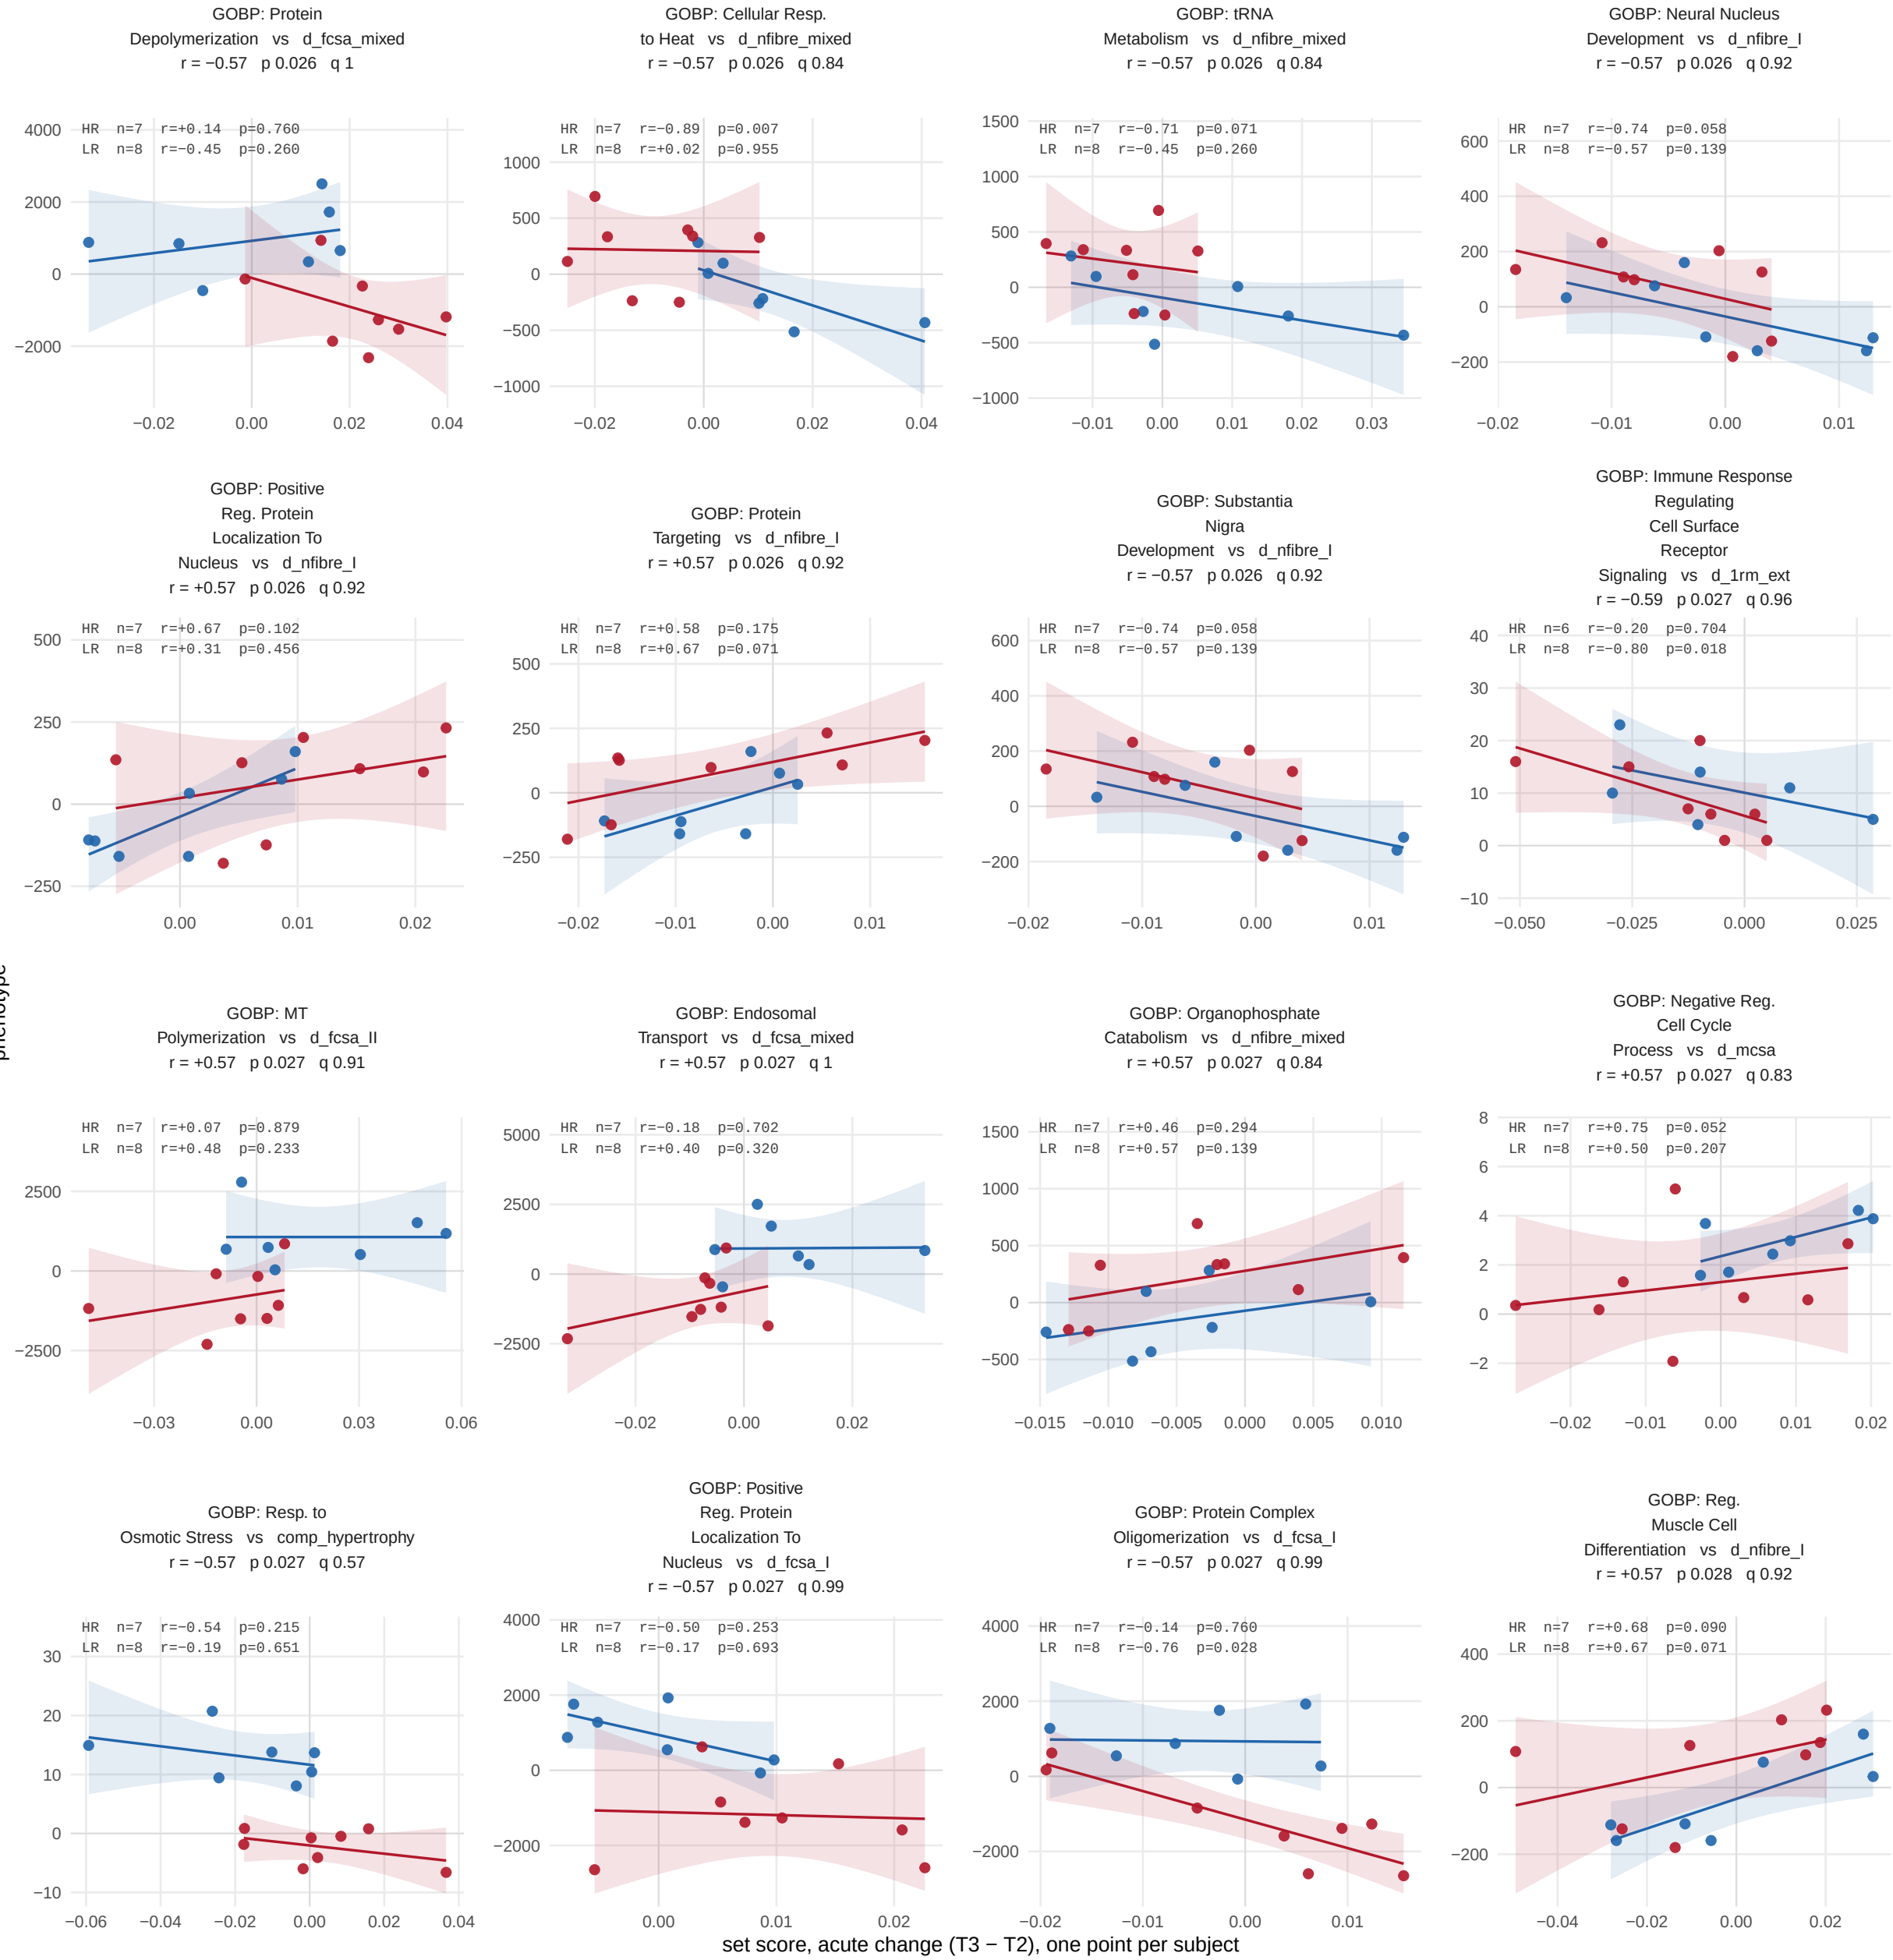


All 511 set-outcome pairs reaching nominal p, by collection then p. Lines are fitted within each arm; the header r is the pooled correlation, q from BH within collection, window and outcome. Nominal p, uncorrected. Each collection is read against its own expectation: GOBP 44.9 of 897, GO_Slim 2.9 of 58, Hallmark 1.7 of 33, KEGG_Legacy 3.1 of 62, Reactome 16.4 of 328.

Set score against phenotype, acute change (T3 – T2)

Spearman, subjects pooled across arms

HR LR

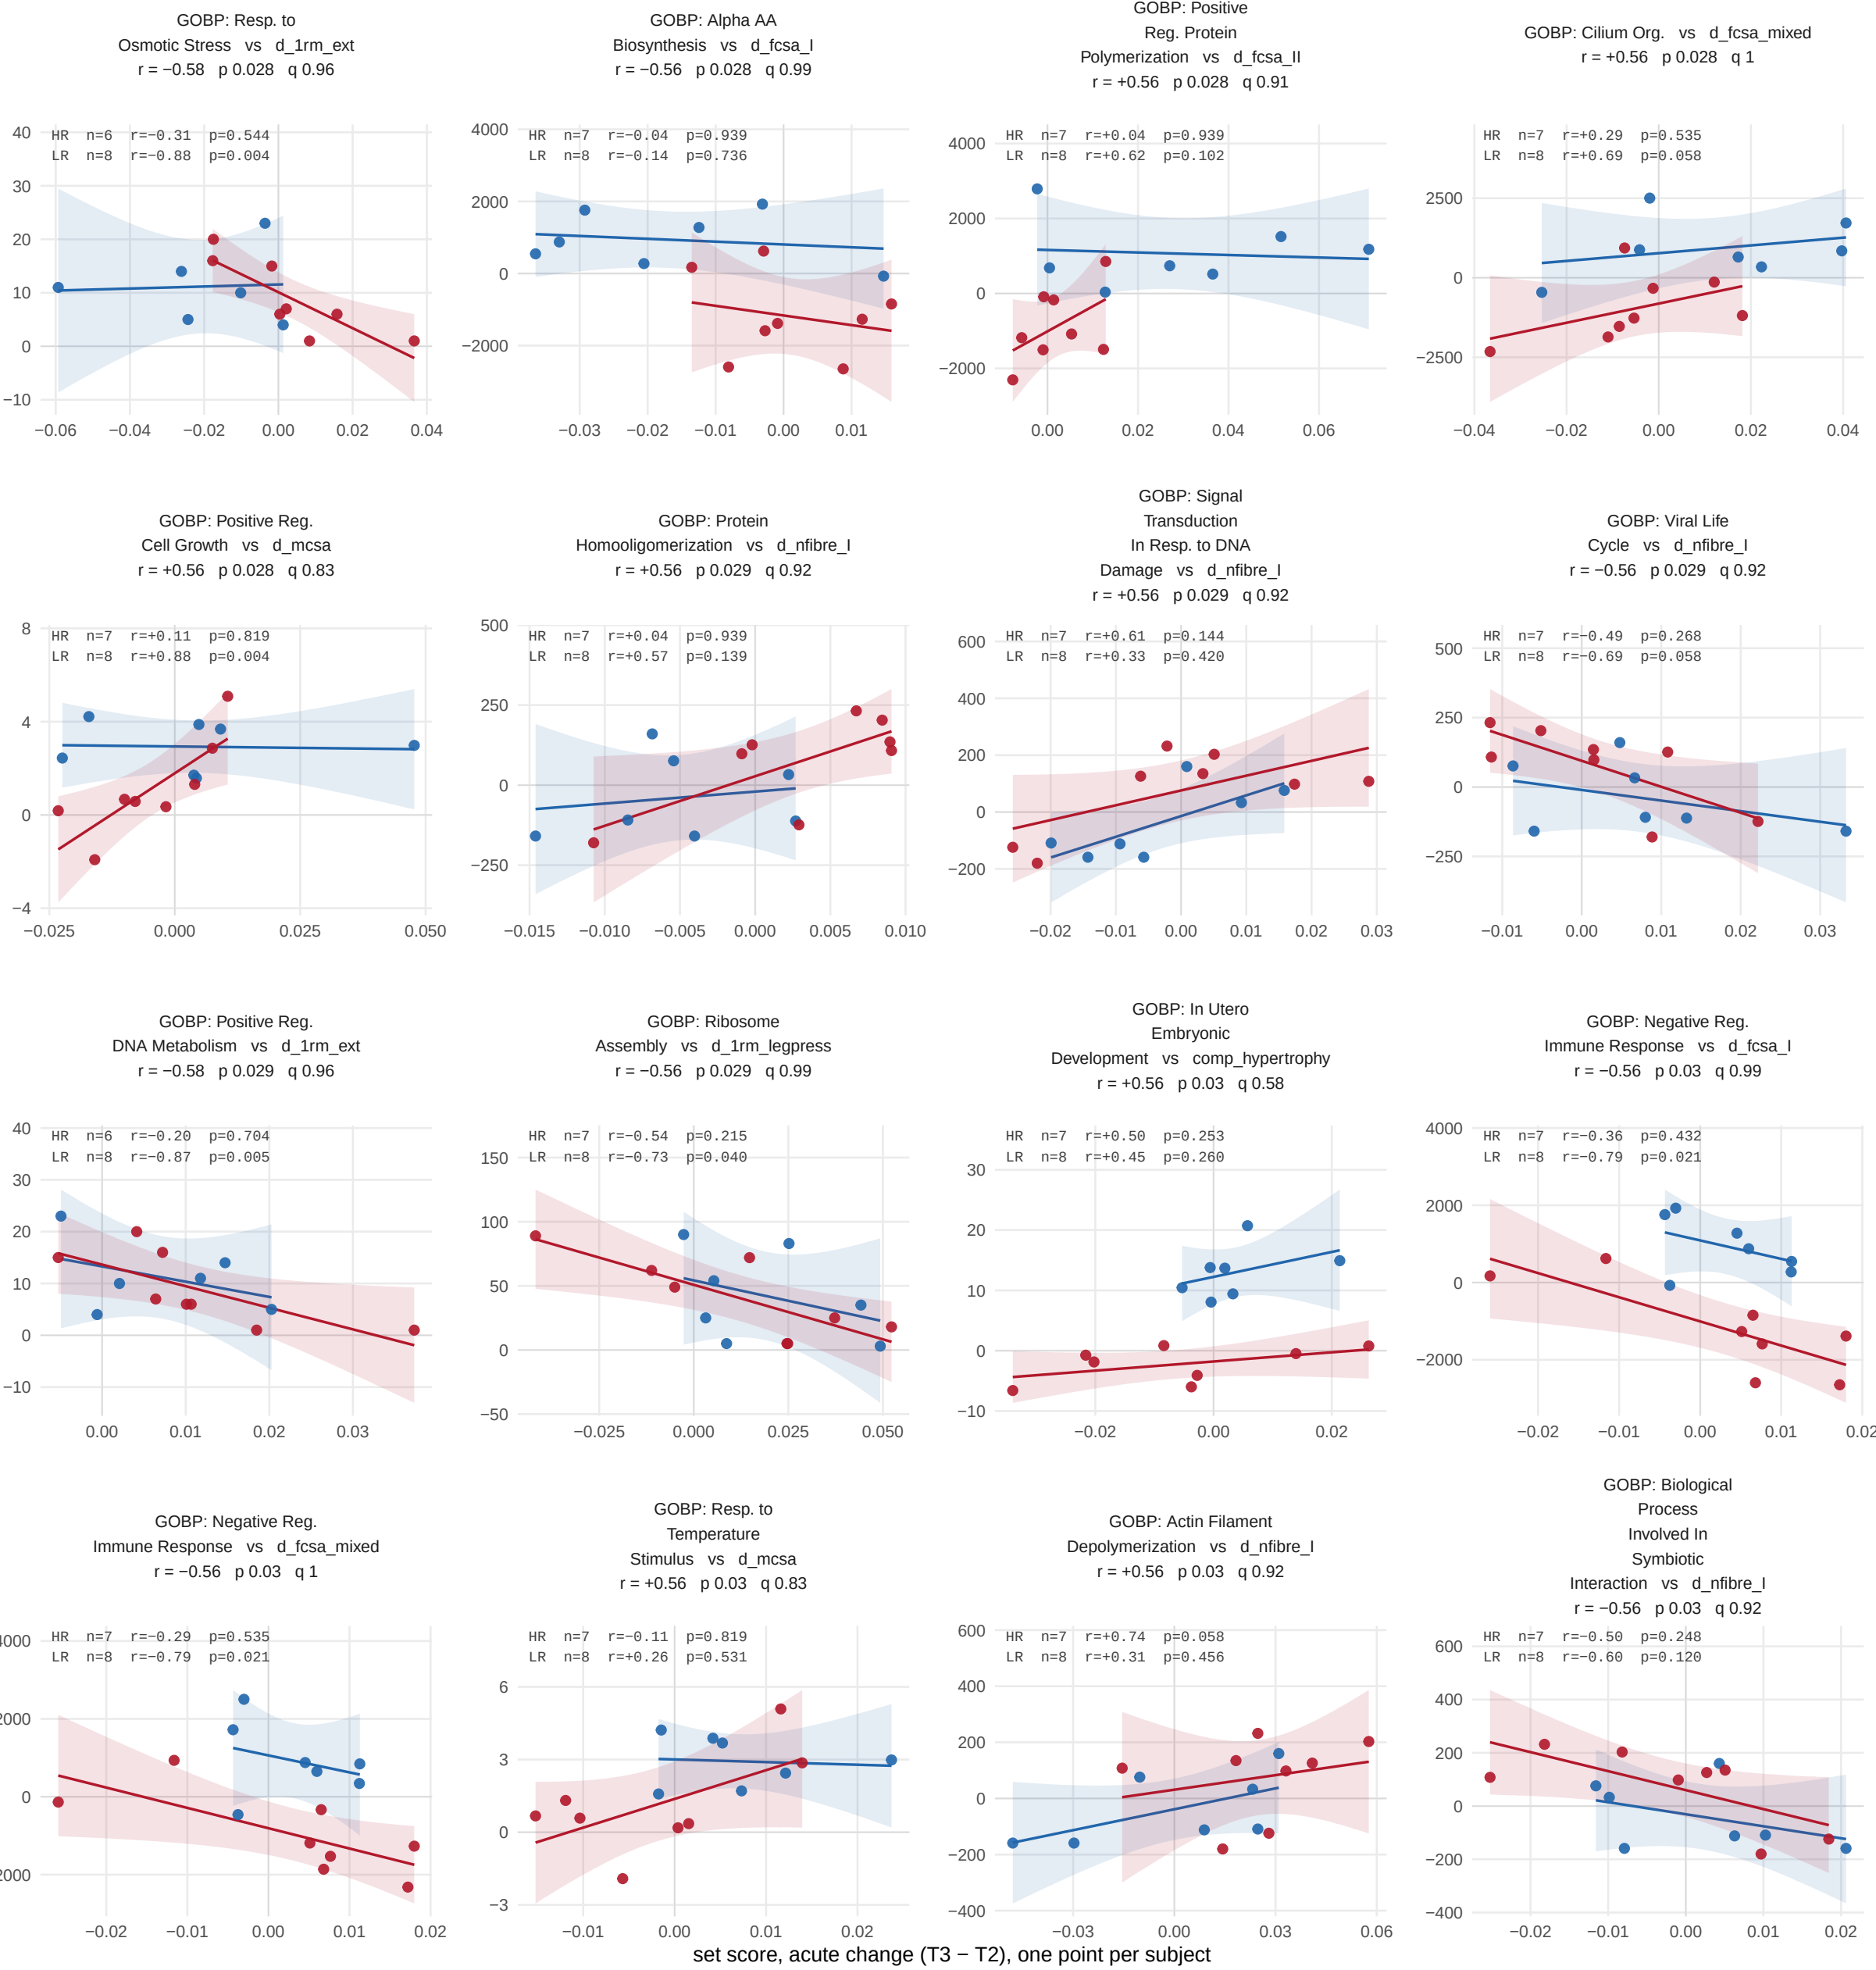

All 511 set-outcome pairs reaching nominal p, by collection then p. Lines are fitted within each arm; the header r is the pooled correlation, q from BH within collection, window and outcome. Nominal p, uncorrected. Each collection is read against its own expectation: GOBP 44.9 of 897, GO_Slim 2.9 of 58, Hallmark 1.7 of 33, KEGG_Legacy 3.1 of 62, Reactome 16.4 of 328.

Set score against phenotype, acute change (T3 – T2)

Spearman, subjects pooled across arms



HR LR



All 511 set-outcome pairs reaching nominal p, by collection then p. Lines are fitted within each arm; the header r is the pooled correlation, q from BH within collection, window and outcome. Nominal p, uncorrected. Each collection is read against its own expectation: GOBP 44.9 of 897, GO_Slim 2.9 of 58, Hallmark 1.7 of 33, KEGG_Legacy 3.1 of 62, Reactome 16.4 of 328.

Set score against phenotype, acute change (T3 – T2)



Spearman, subjects pooled across arms

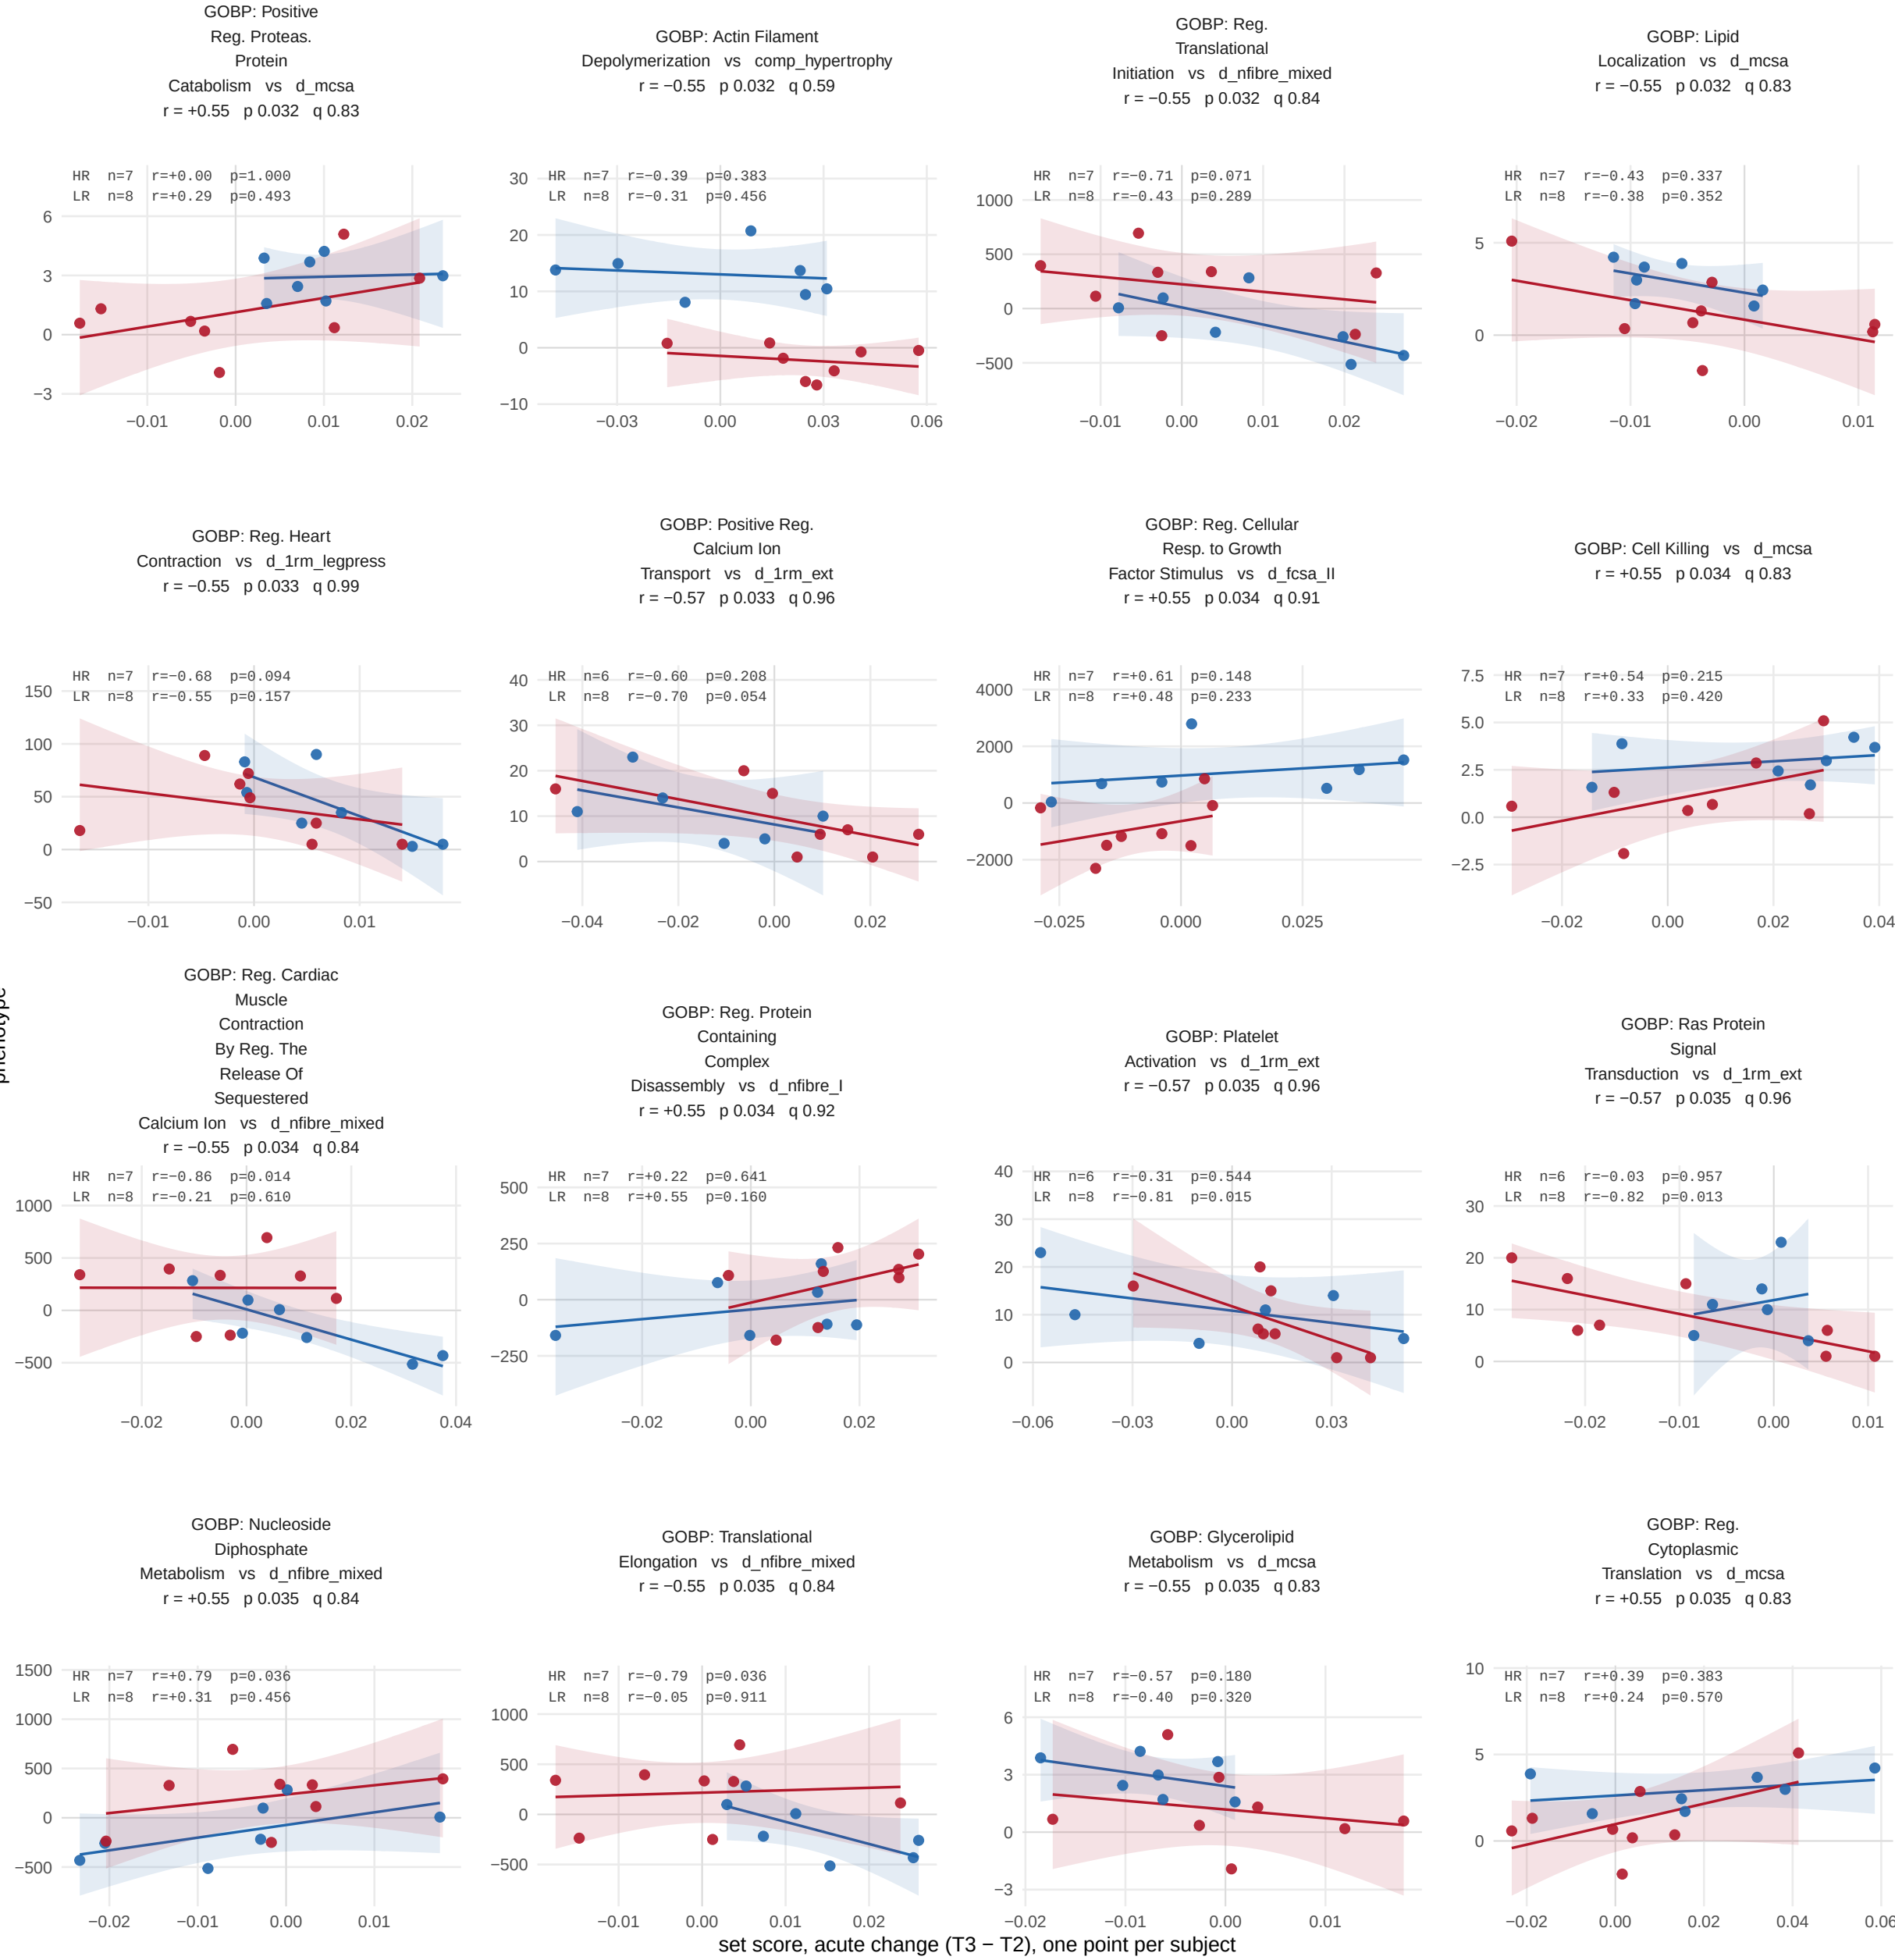

All 511 set-outcome pairs reaching nominal p, by collection then p. Lines are fitted within each arm; the header r is the pooled correlation, q from BH within collection, window and outcome. Nominal p, uncorrected. Each collection is read against its own expectation: GOBP 44.9 of 897, GO_Slim 2.9 of 58, Hallmark 1.7 of 33, KEGG_Legacy 3.1 of 62, Reactome 16.4 of 328.

Set score against phenotype, acute change (T3 – T2)

Spearman, subjects pooled across arms

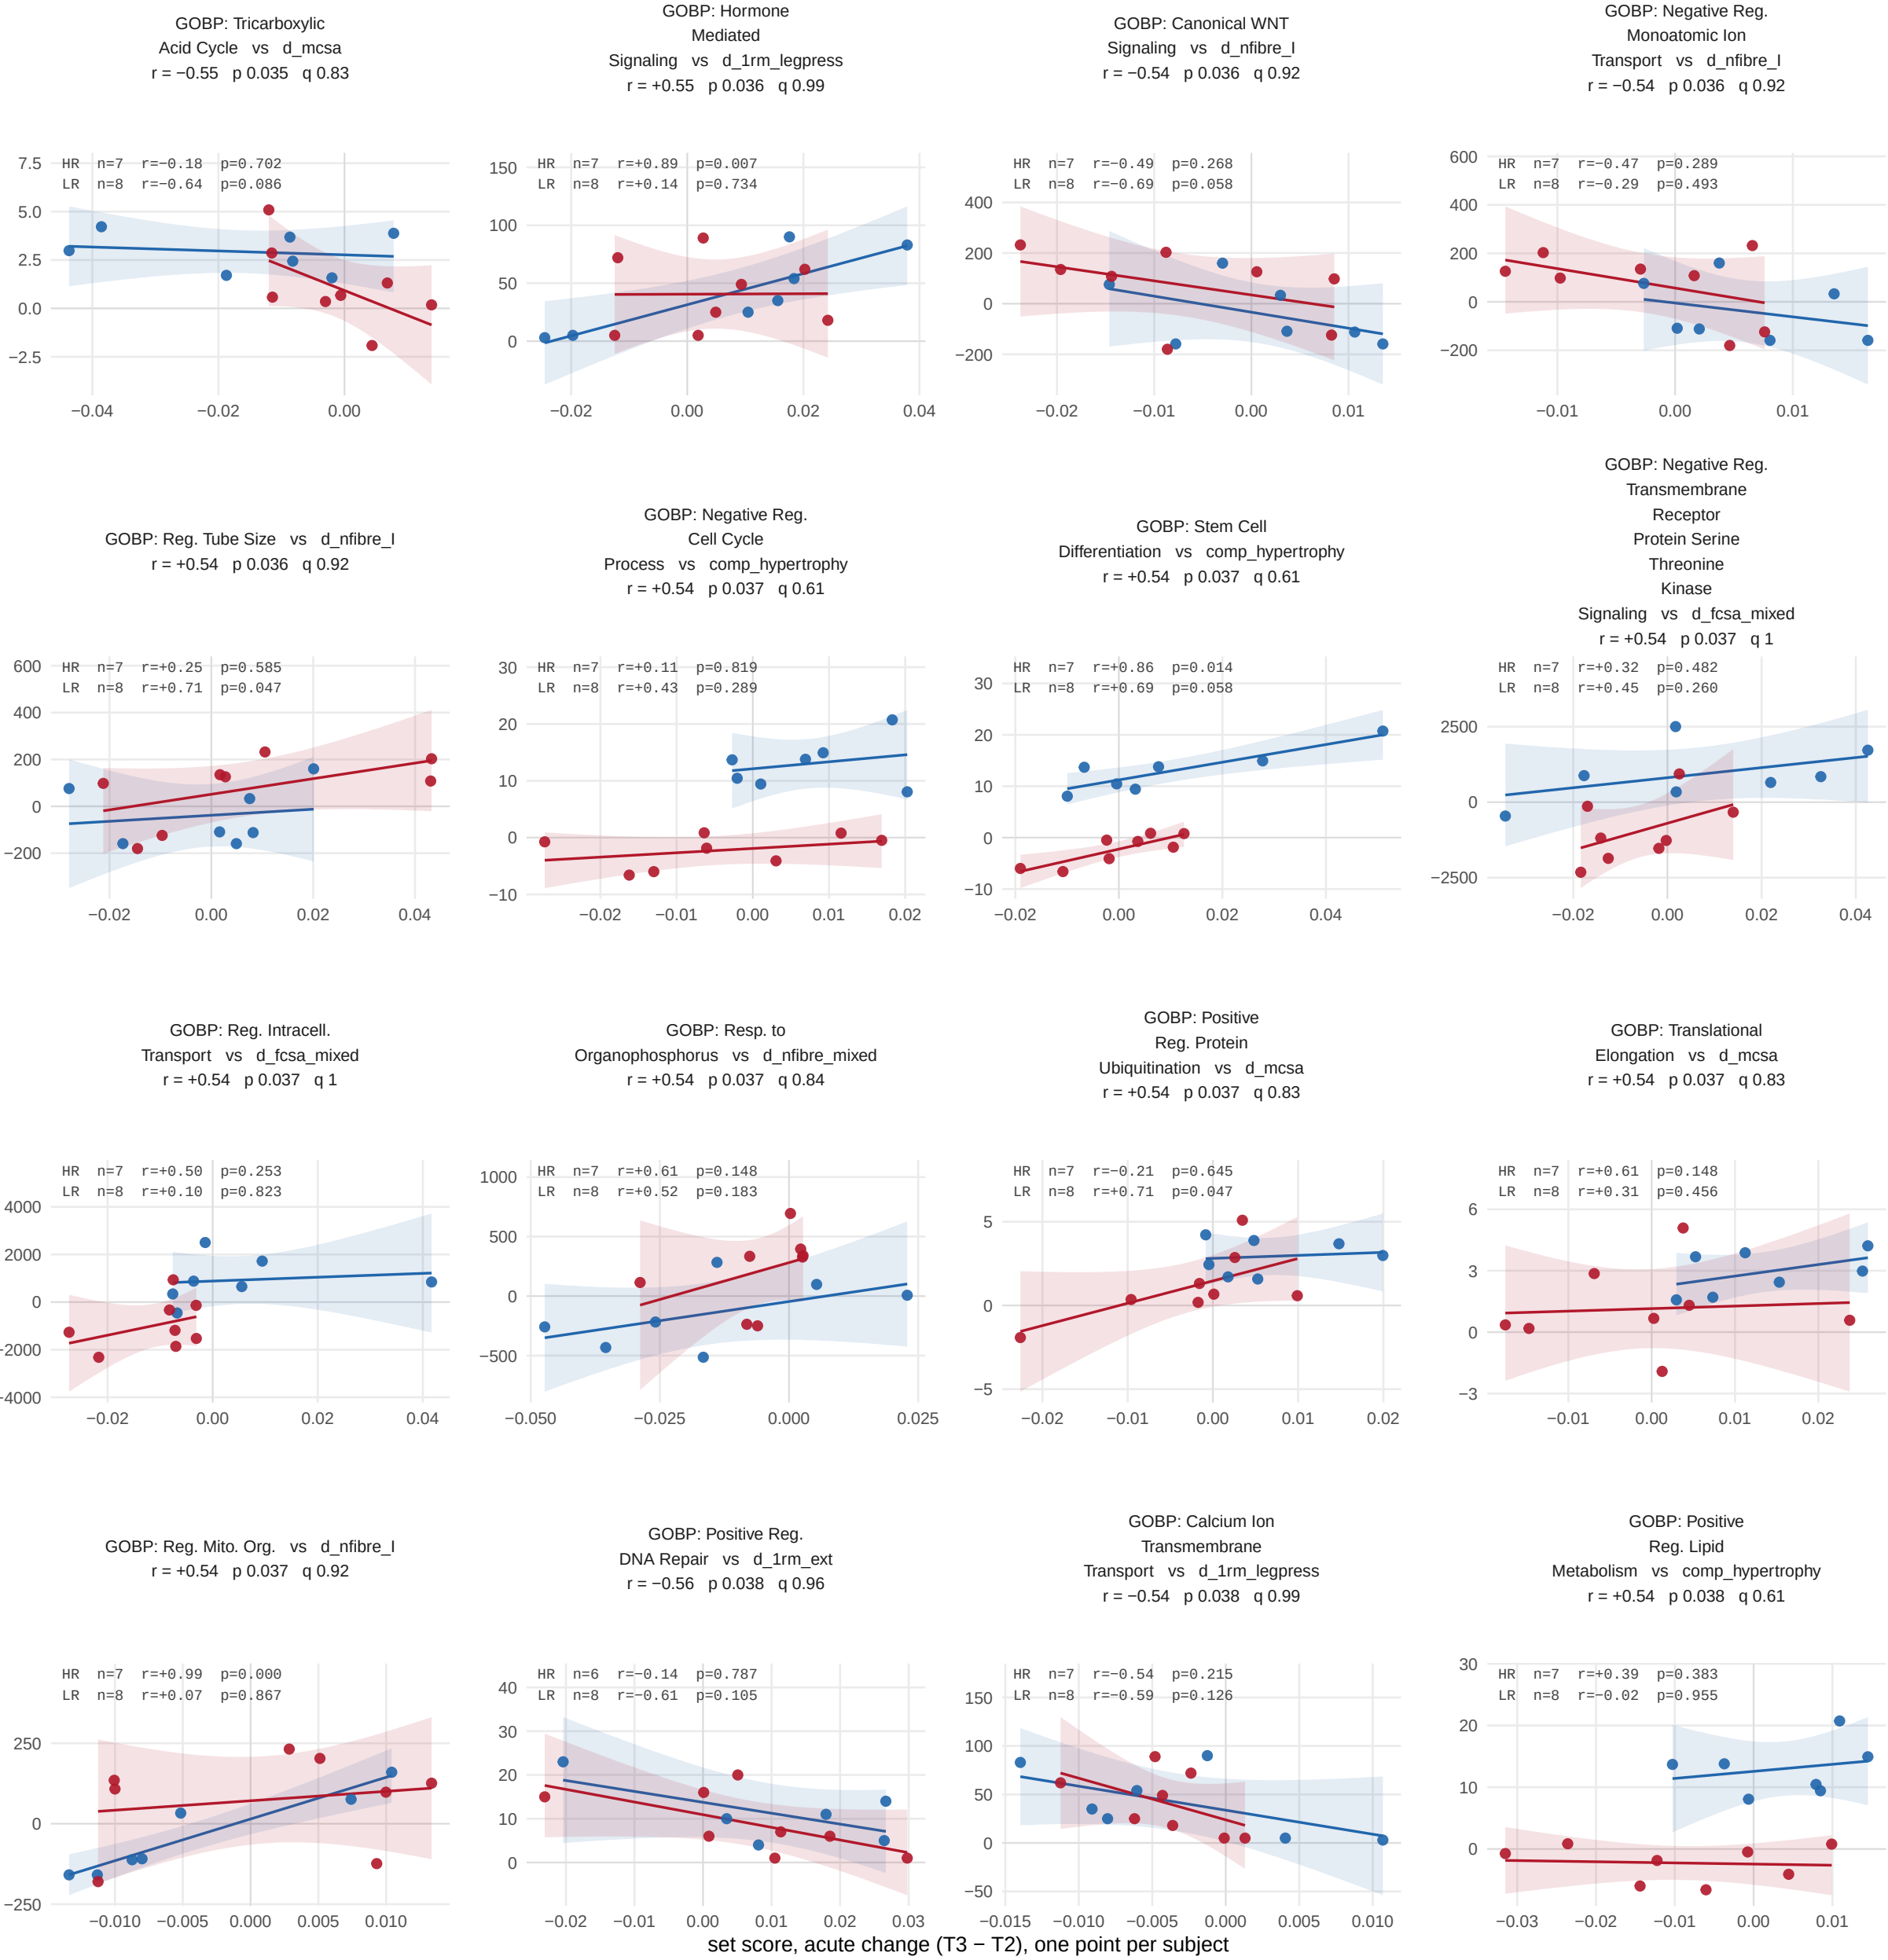


All 511 set-outcome pairs reaching nominal p, by collection then p. Lines are fitted within each arm; the header r is the pooled correlation, q from BH within collection, window and outcome. Nominal p, uncorrected. Each collection is read against its own expectation: GOBP 44.9 of 897, GO_Slim 2.9 of 58, Hallmark 1.7 of 33, KEGG_Legacy 3.1 of 62, Reactome 16.4 of 328.

Set score against phenotype, acute change (T3 – T2)

Spearman, subjects pooled across arms


HR LR

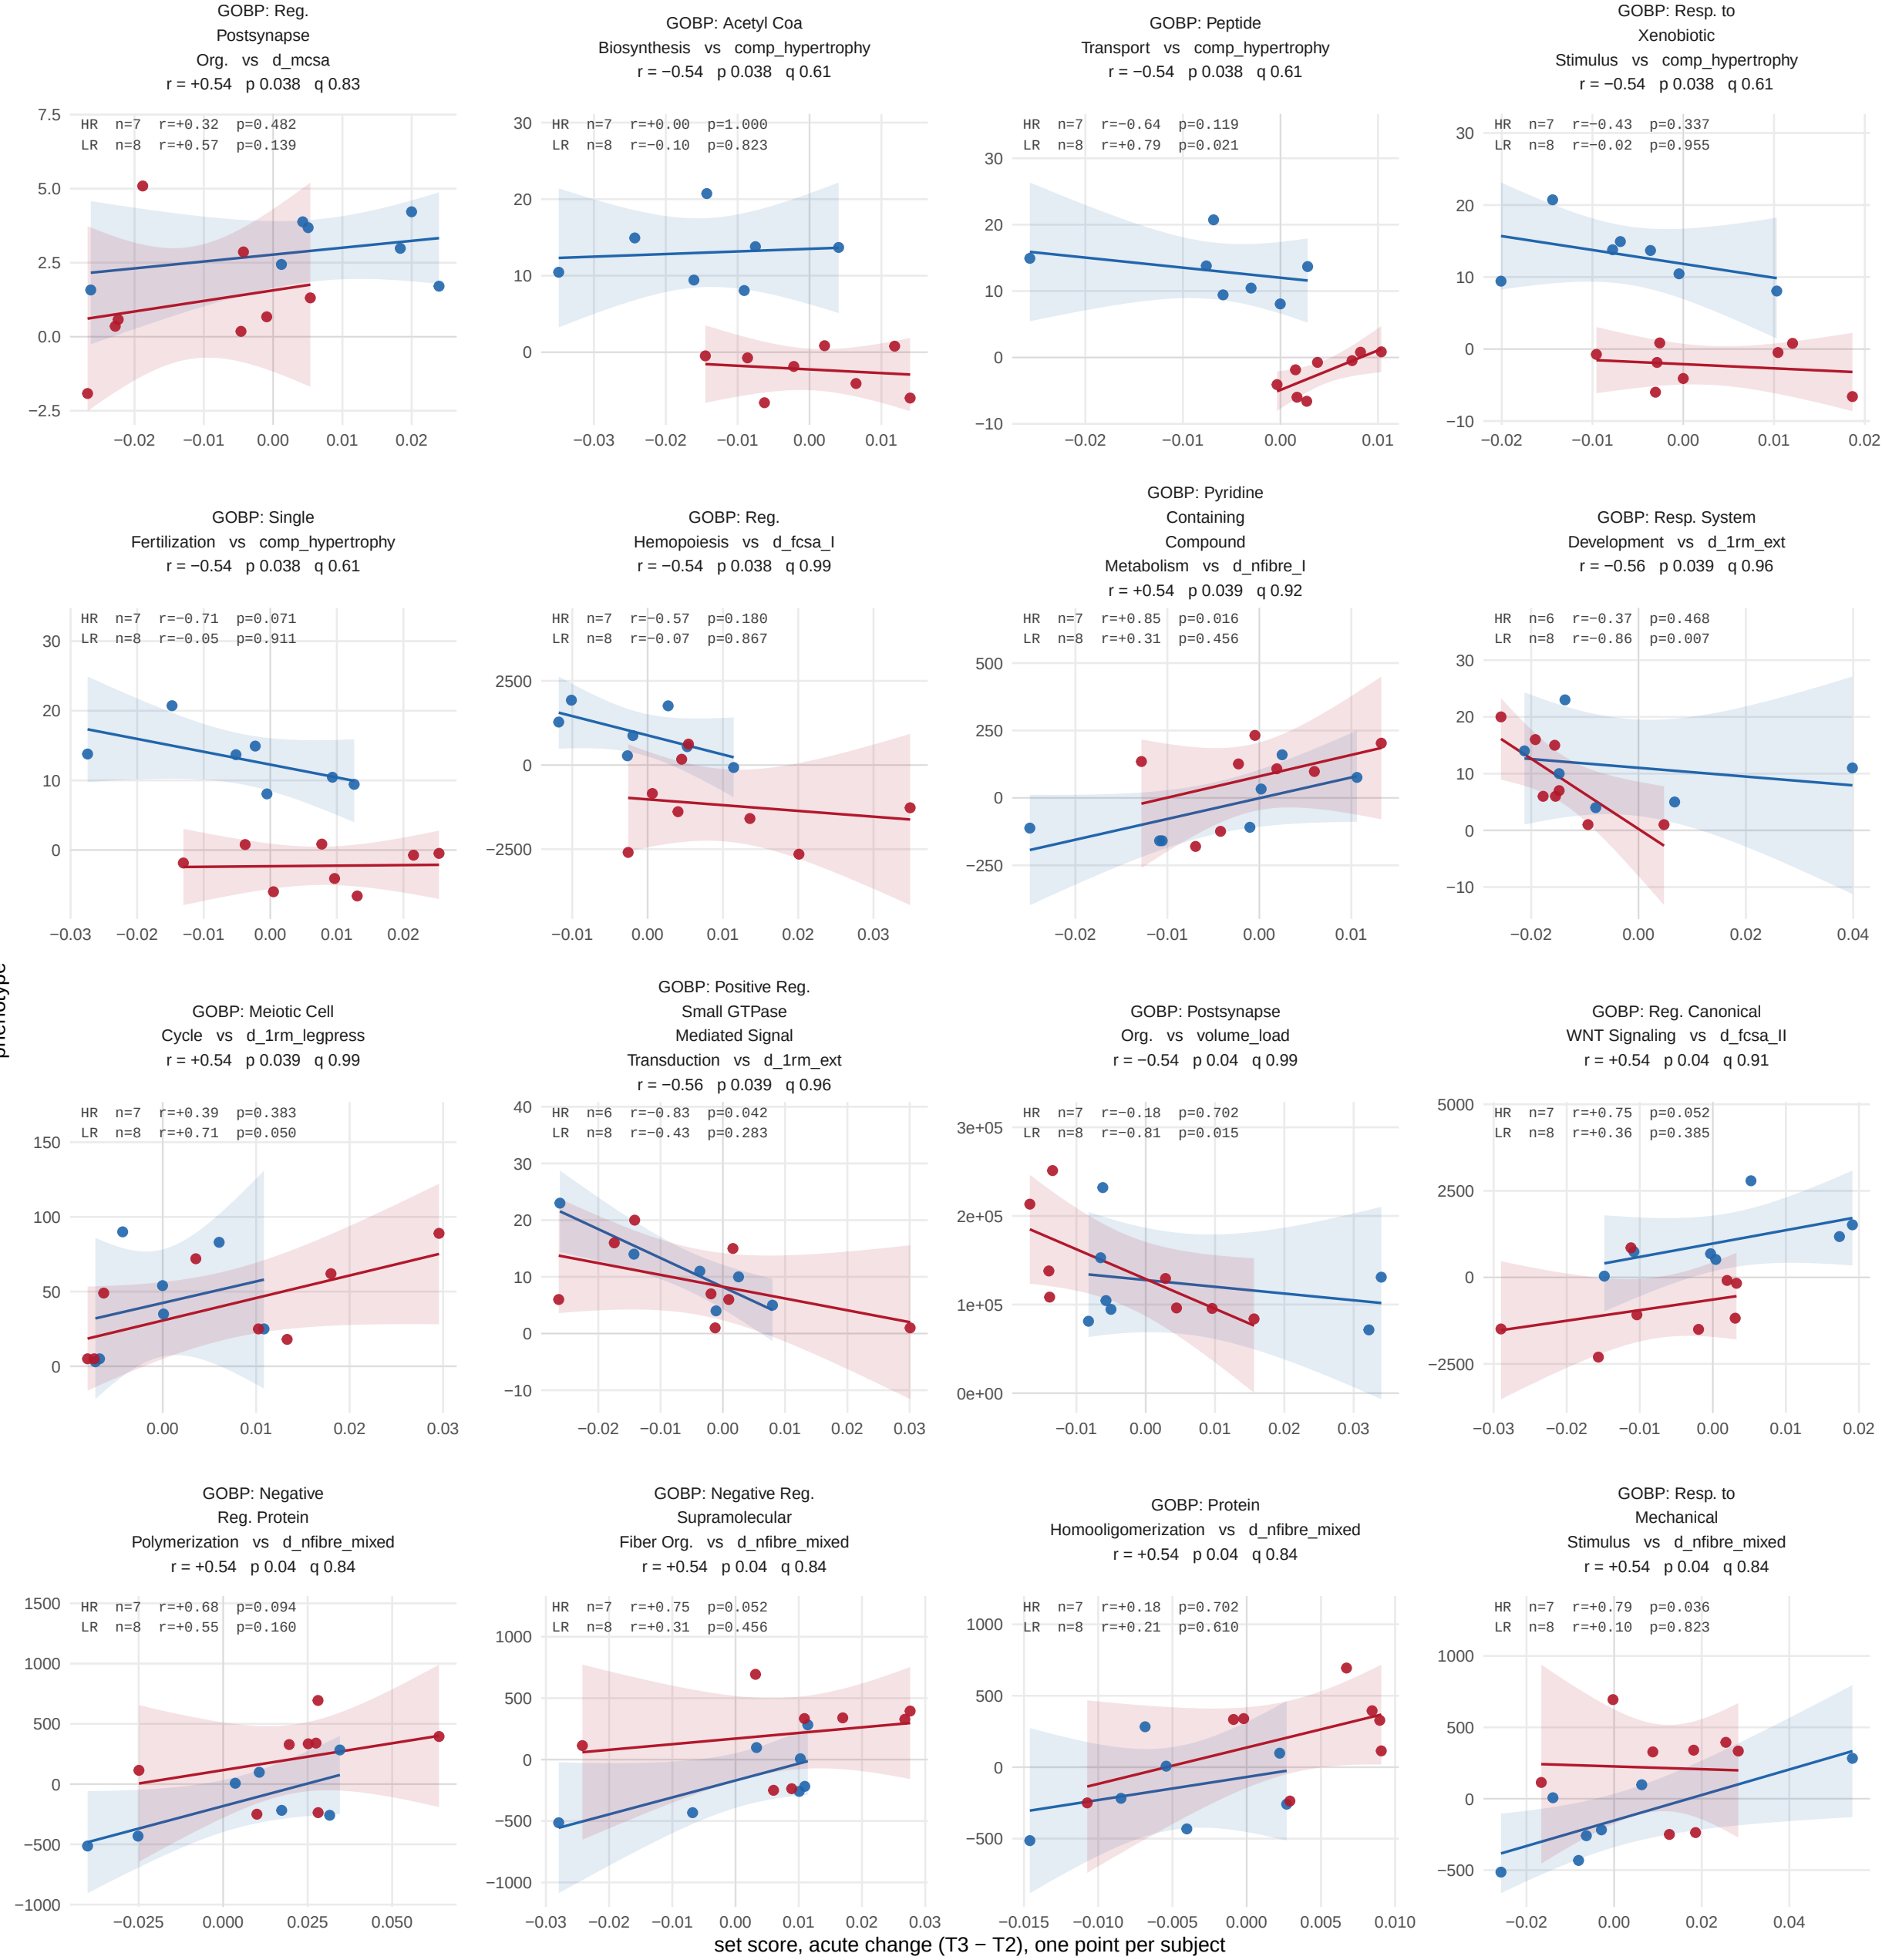

All 511 set-outcome pairs reaching nominal p, by collection then p. Lines are fitted within each arm; the header r is the pooled correlation, q from BH within collection, window and outcome. Nominal p, uncorrected. Each collection is read against its own expectation: GOBP 44.9 of 897, GO_Slim 2.9 of 58, Hallmark 1.7 of 33, KEGG_Legacy 3.1 of 62, Reactome 16.4 of 328.

Set score against phenotype, acute change (T3 – T2)

Spearman, subjects pooled across arms

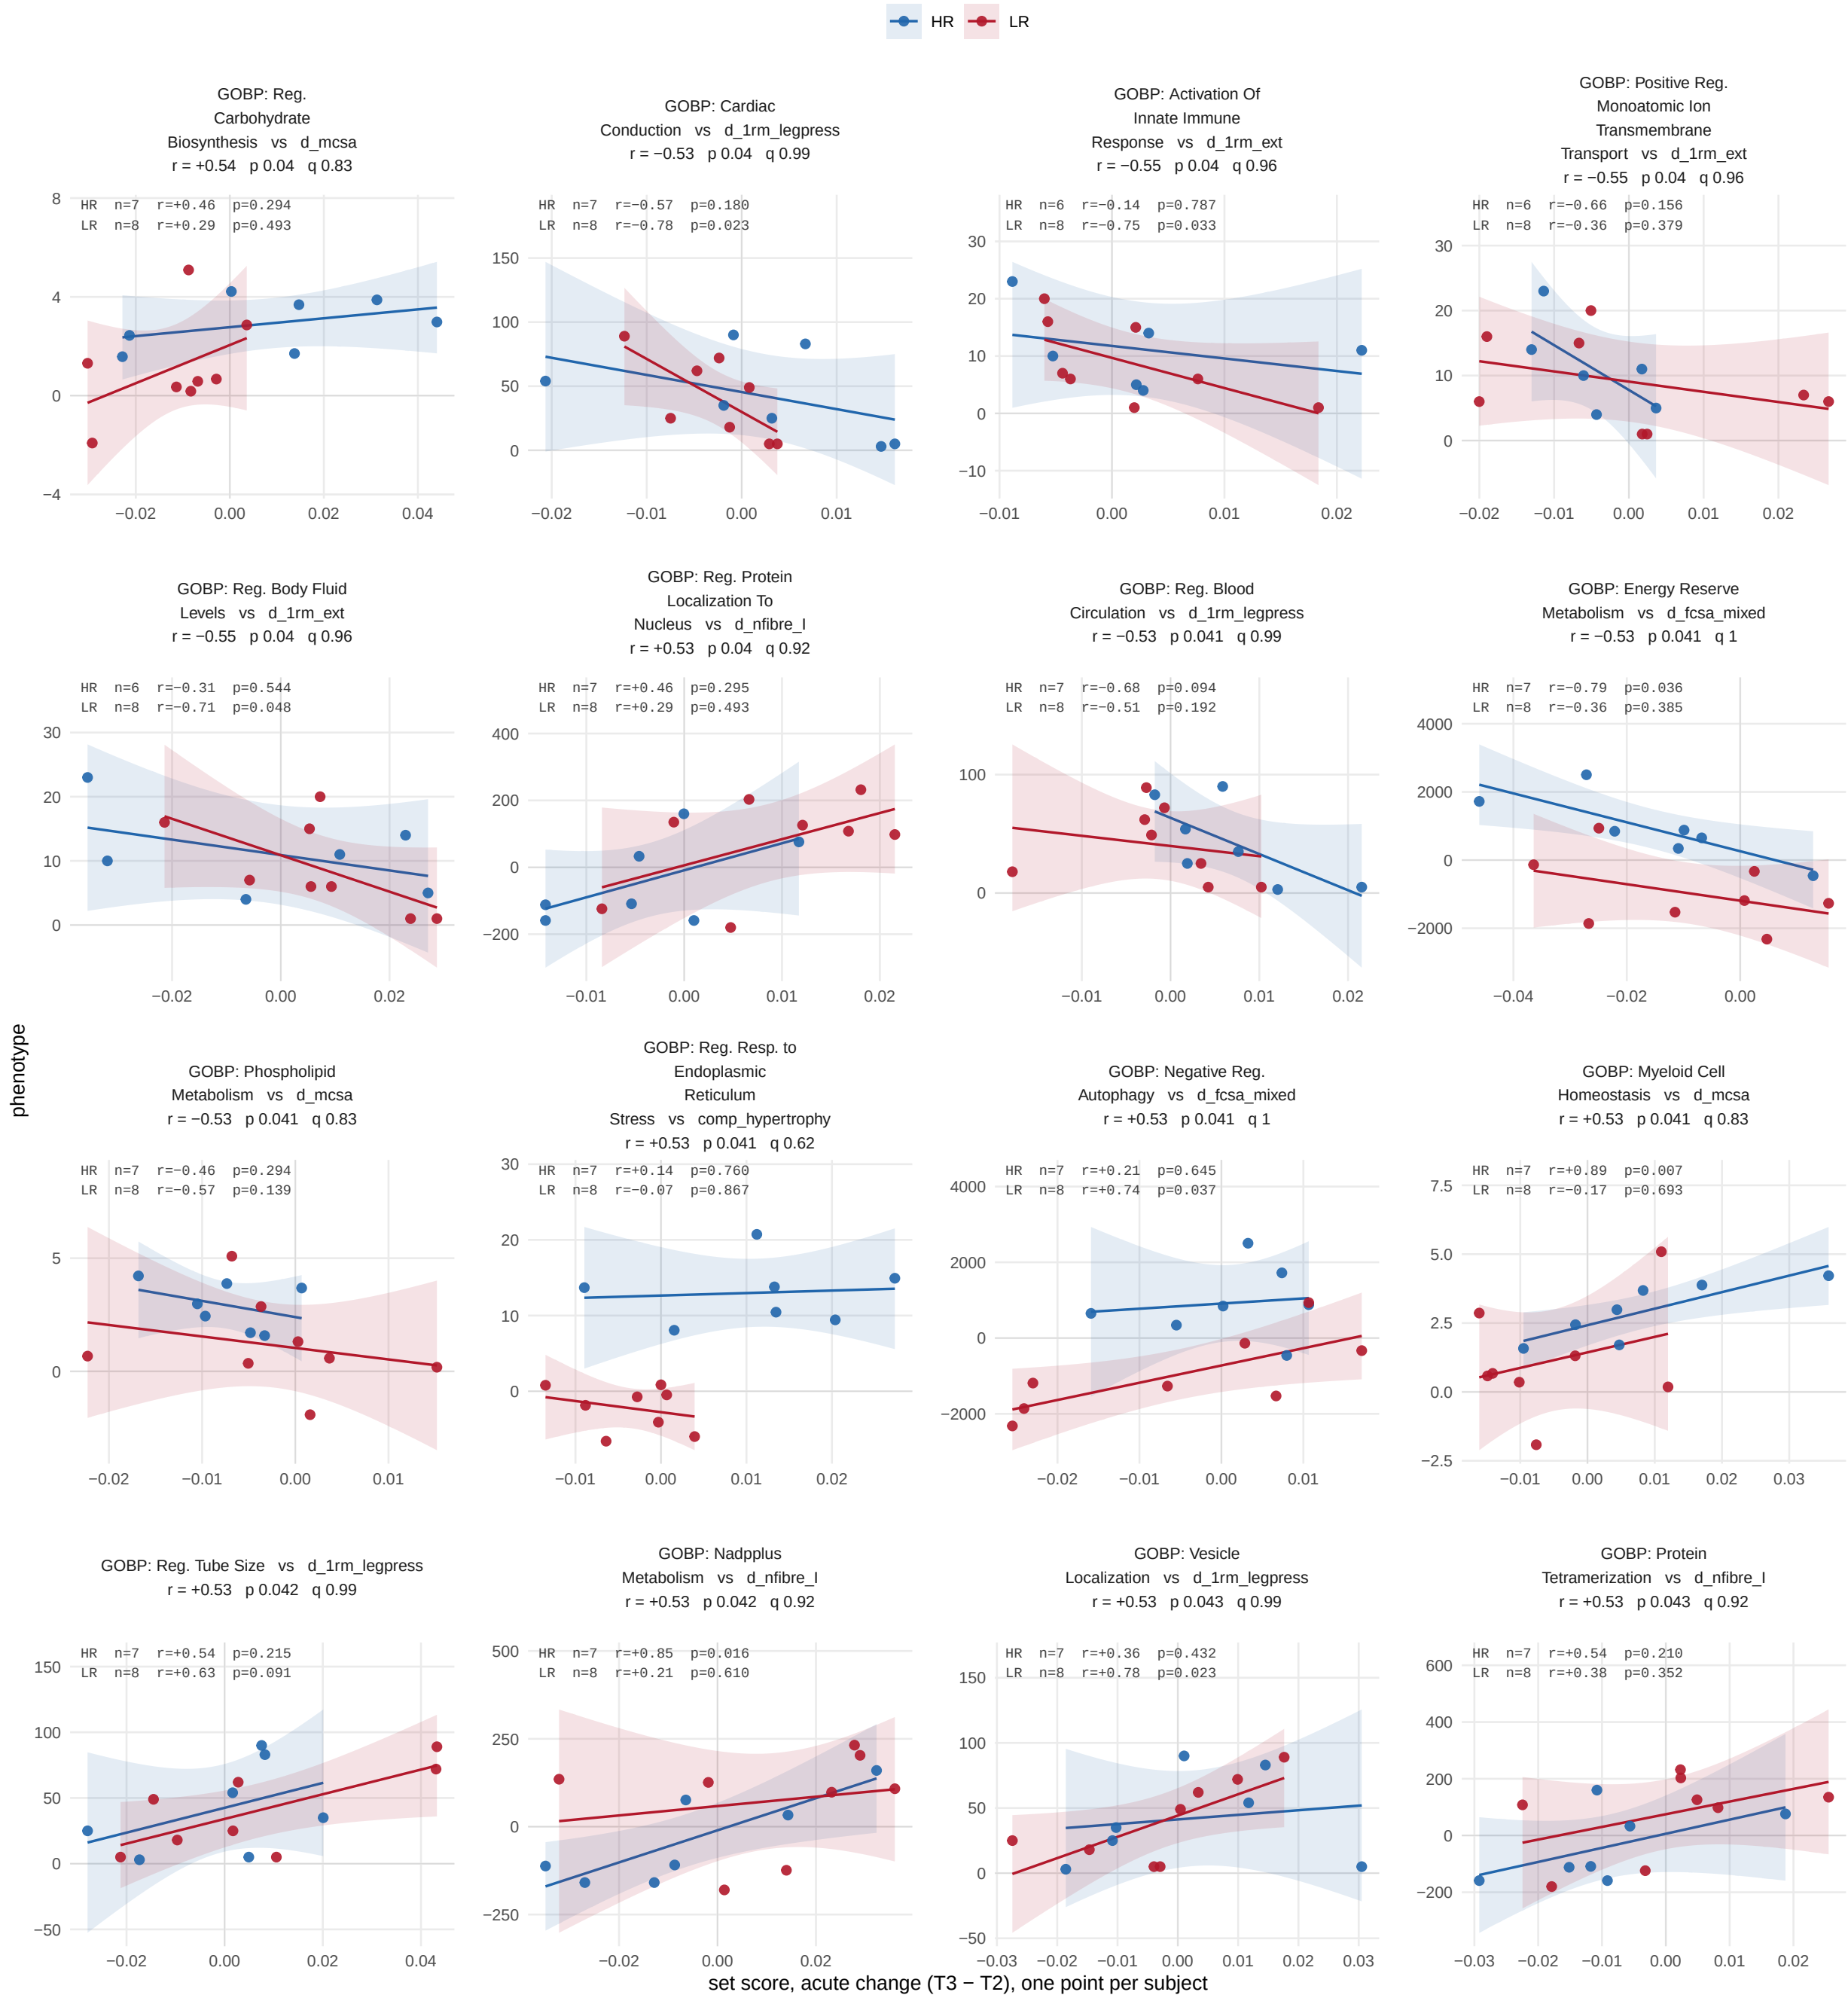


All 511 set-outcome pairs reaching nominal p, by collection then p. Lines are fitted within each arm; the header r is the pooled correlation, q from BH within collection, window and outcome. Nominal p, uncorrected. Each collection is read against its own expectation: GOBP 44.9 of 897, GO_Slim 2.9 of 58, Hallmark 1.7 of 33, KEGG_Legacy 3.1 of 62, Reactome 16.4 of 328.

Set score against phenotype, acute change (T3 – T2)

Spearman, subjects pooled across arms

HR LR

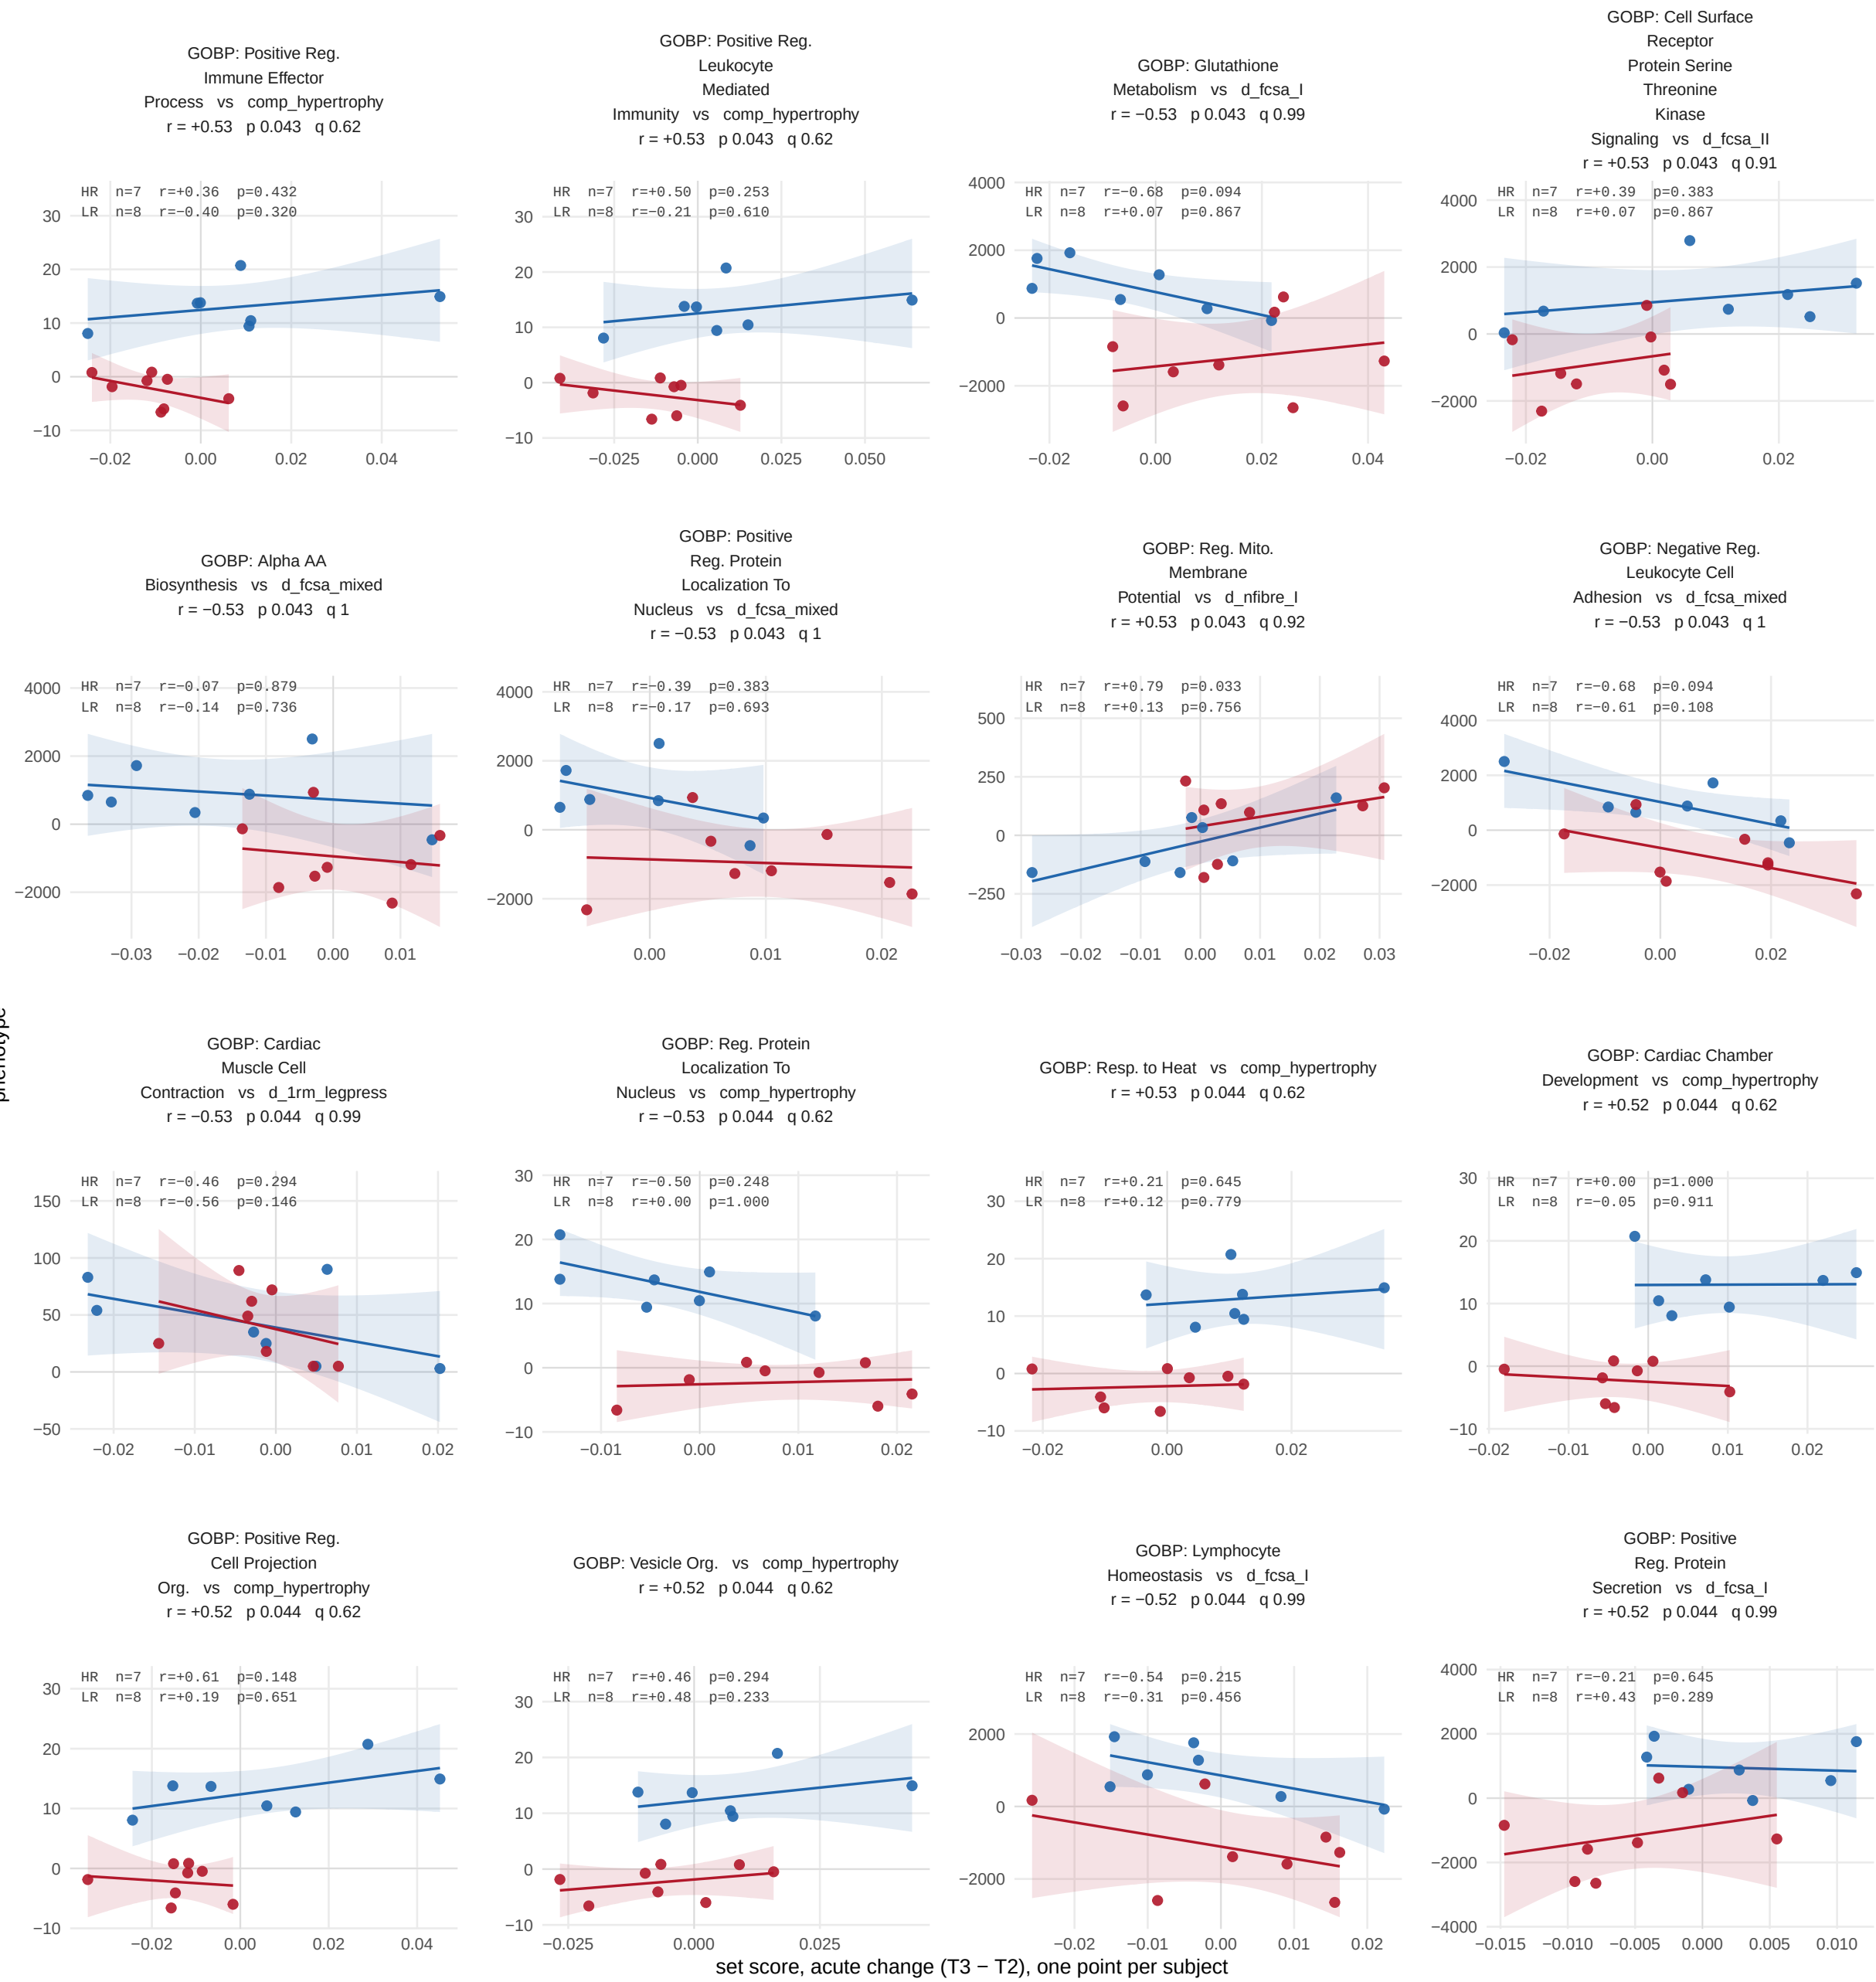


All 511 set-outcome pairs reaching nominal p, by collection then p. Lines are fitted within each arm; the header r is the pooled correlation, q from BH within collection, window and outcome. Nominal p, uncorrected. Each collection is read against its own expectation: GOBP 44.9 of 897, GO_Slim 2.9 of 58, Hallmark 1.7 of 33, KEGG_Legacy 3.1 of 62, Reactome 16.4 of 328.

Set score against phenotype, acute change (T3 – T2)

Spearman, subjects pooled across arms

HR LR

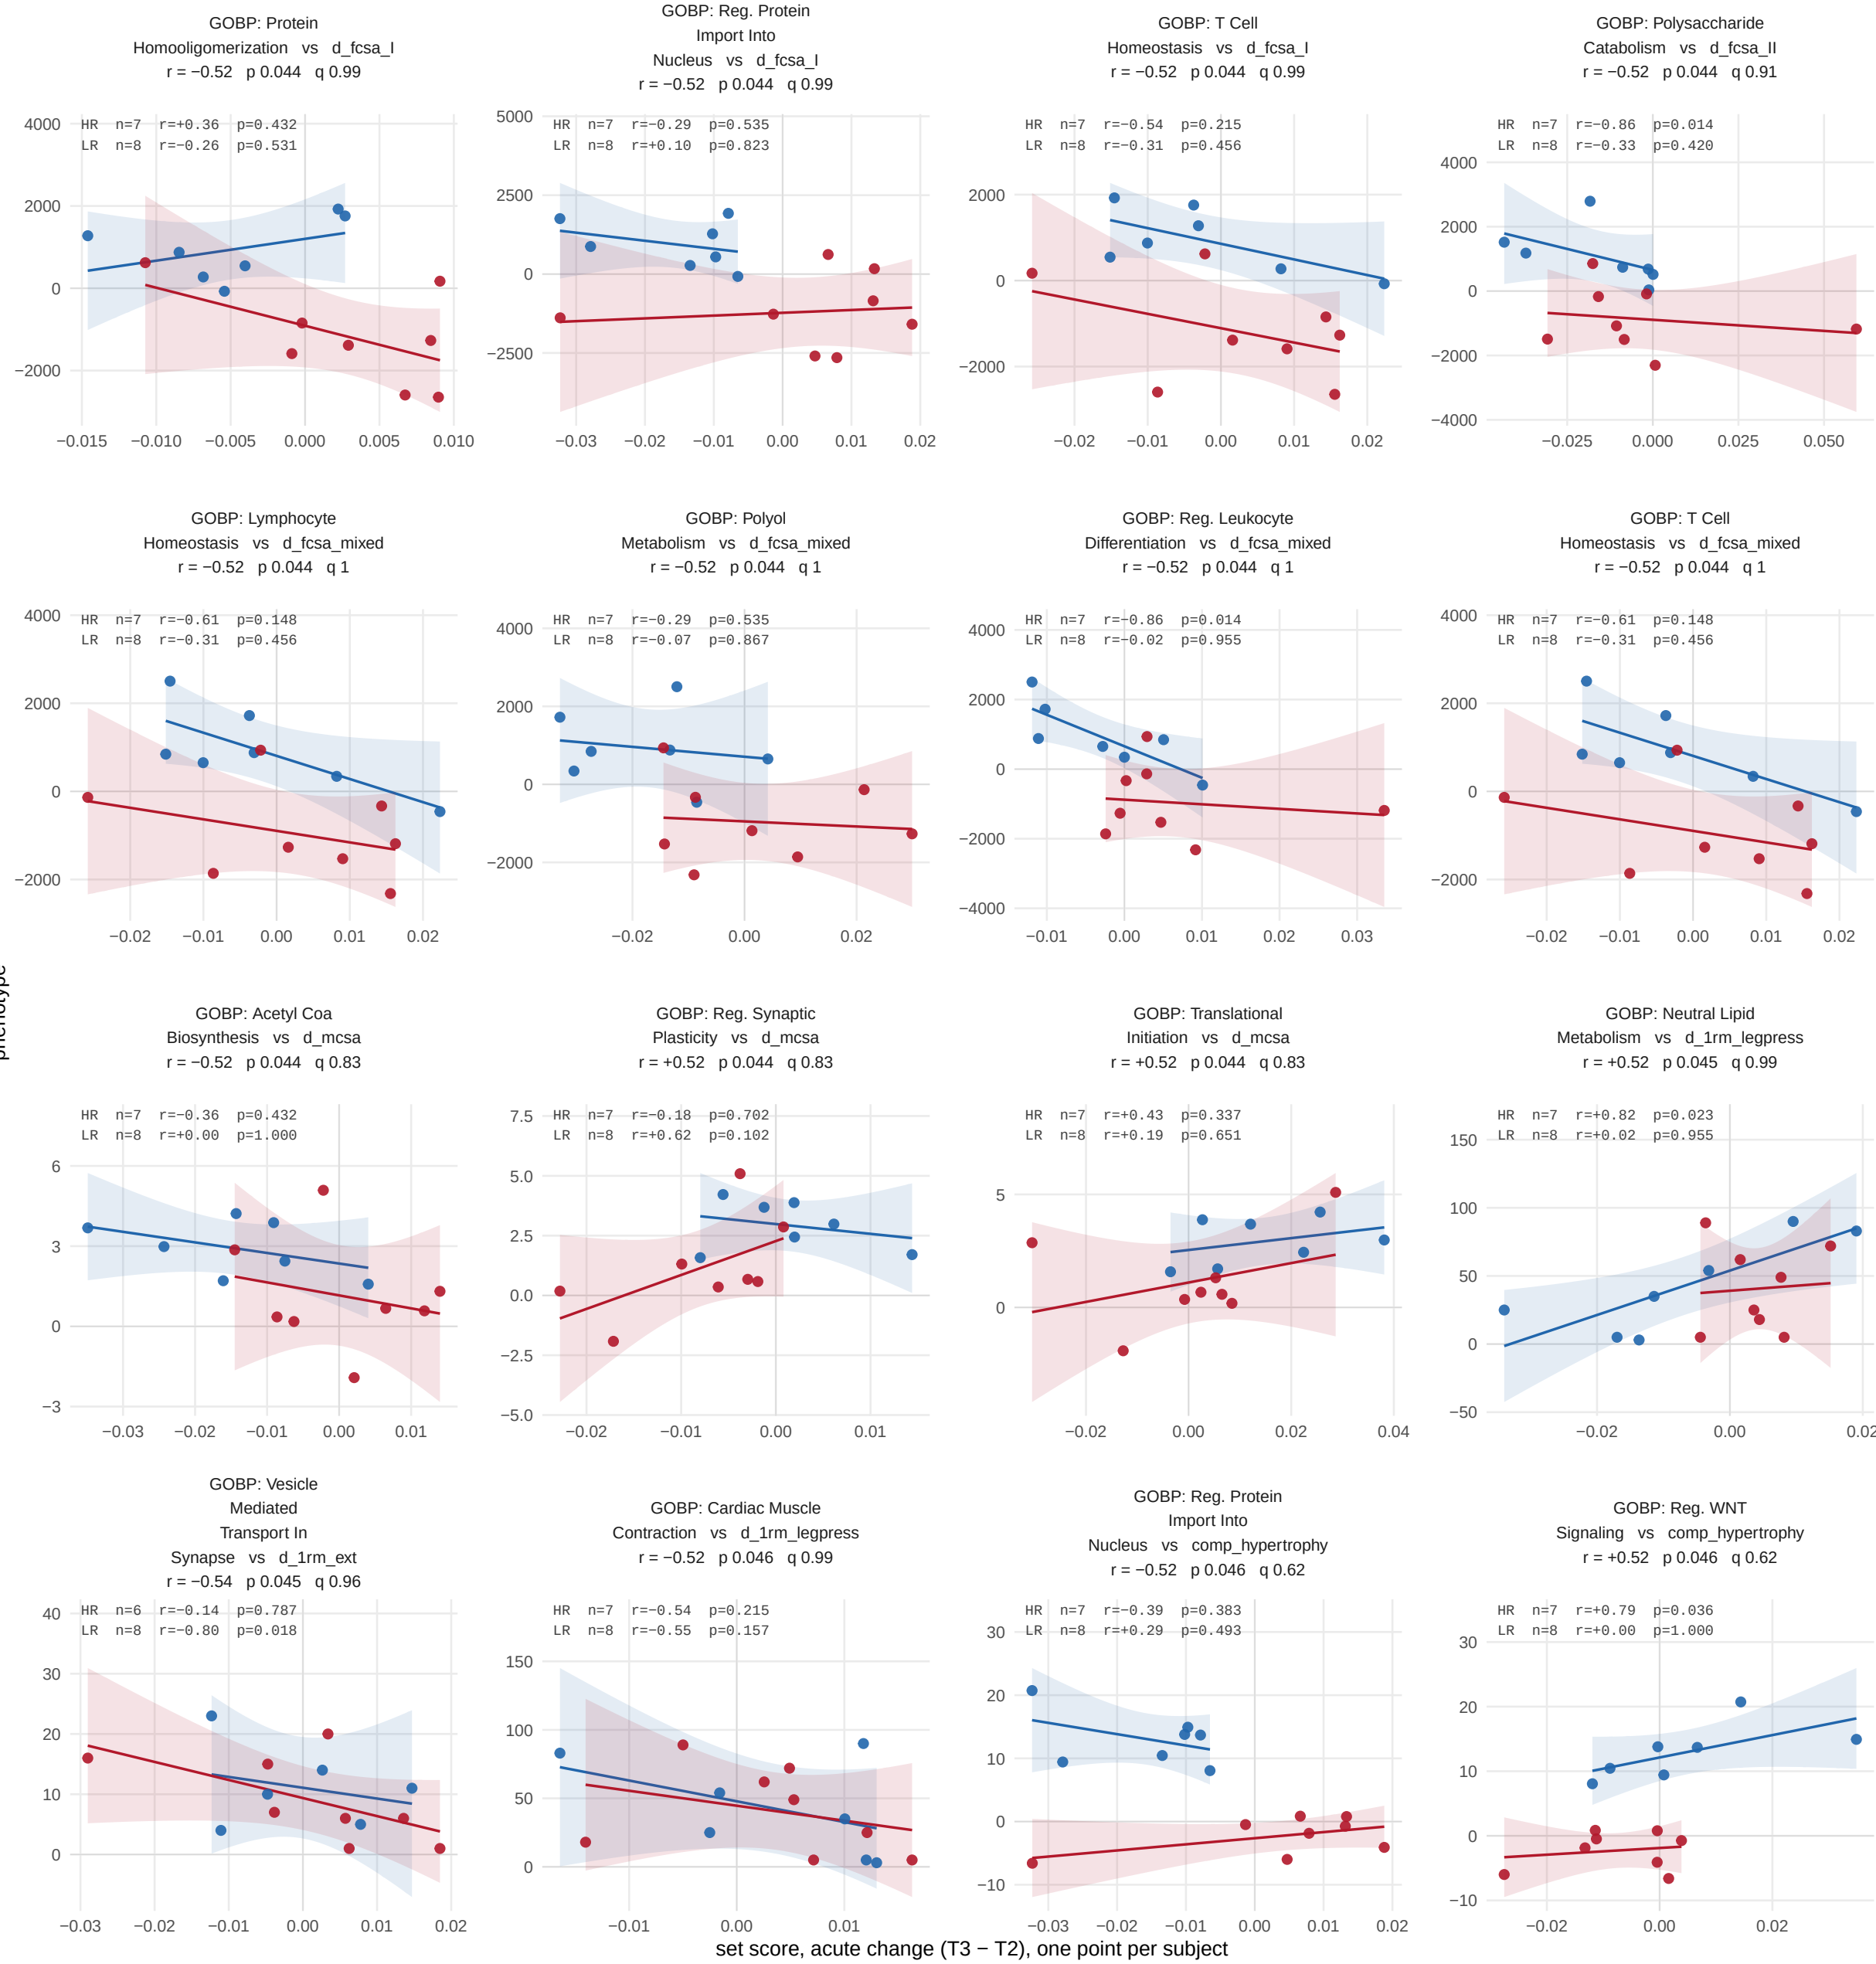


All 511 set-outcome pairs reaching nominal p, by collection then p. Lines are fitted within each arm; the header r is the pooled correlation, q from BH within collection, window and outcome. Nominal p, uncorrected. Each collection is read against its own expectation: GOBP 44.9 of 897, GO_Slim 2.9 of 58, Hallmark 1.7 of 33, KEGG_Legacy 3.1 of 62, Reactome 16.4 of 328.

Set score against phenotype, acute change (T3 – T2)

Spearman, subjects pooled across arms

HR LR

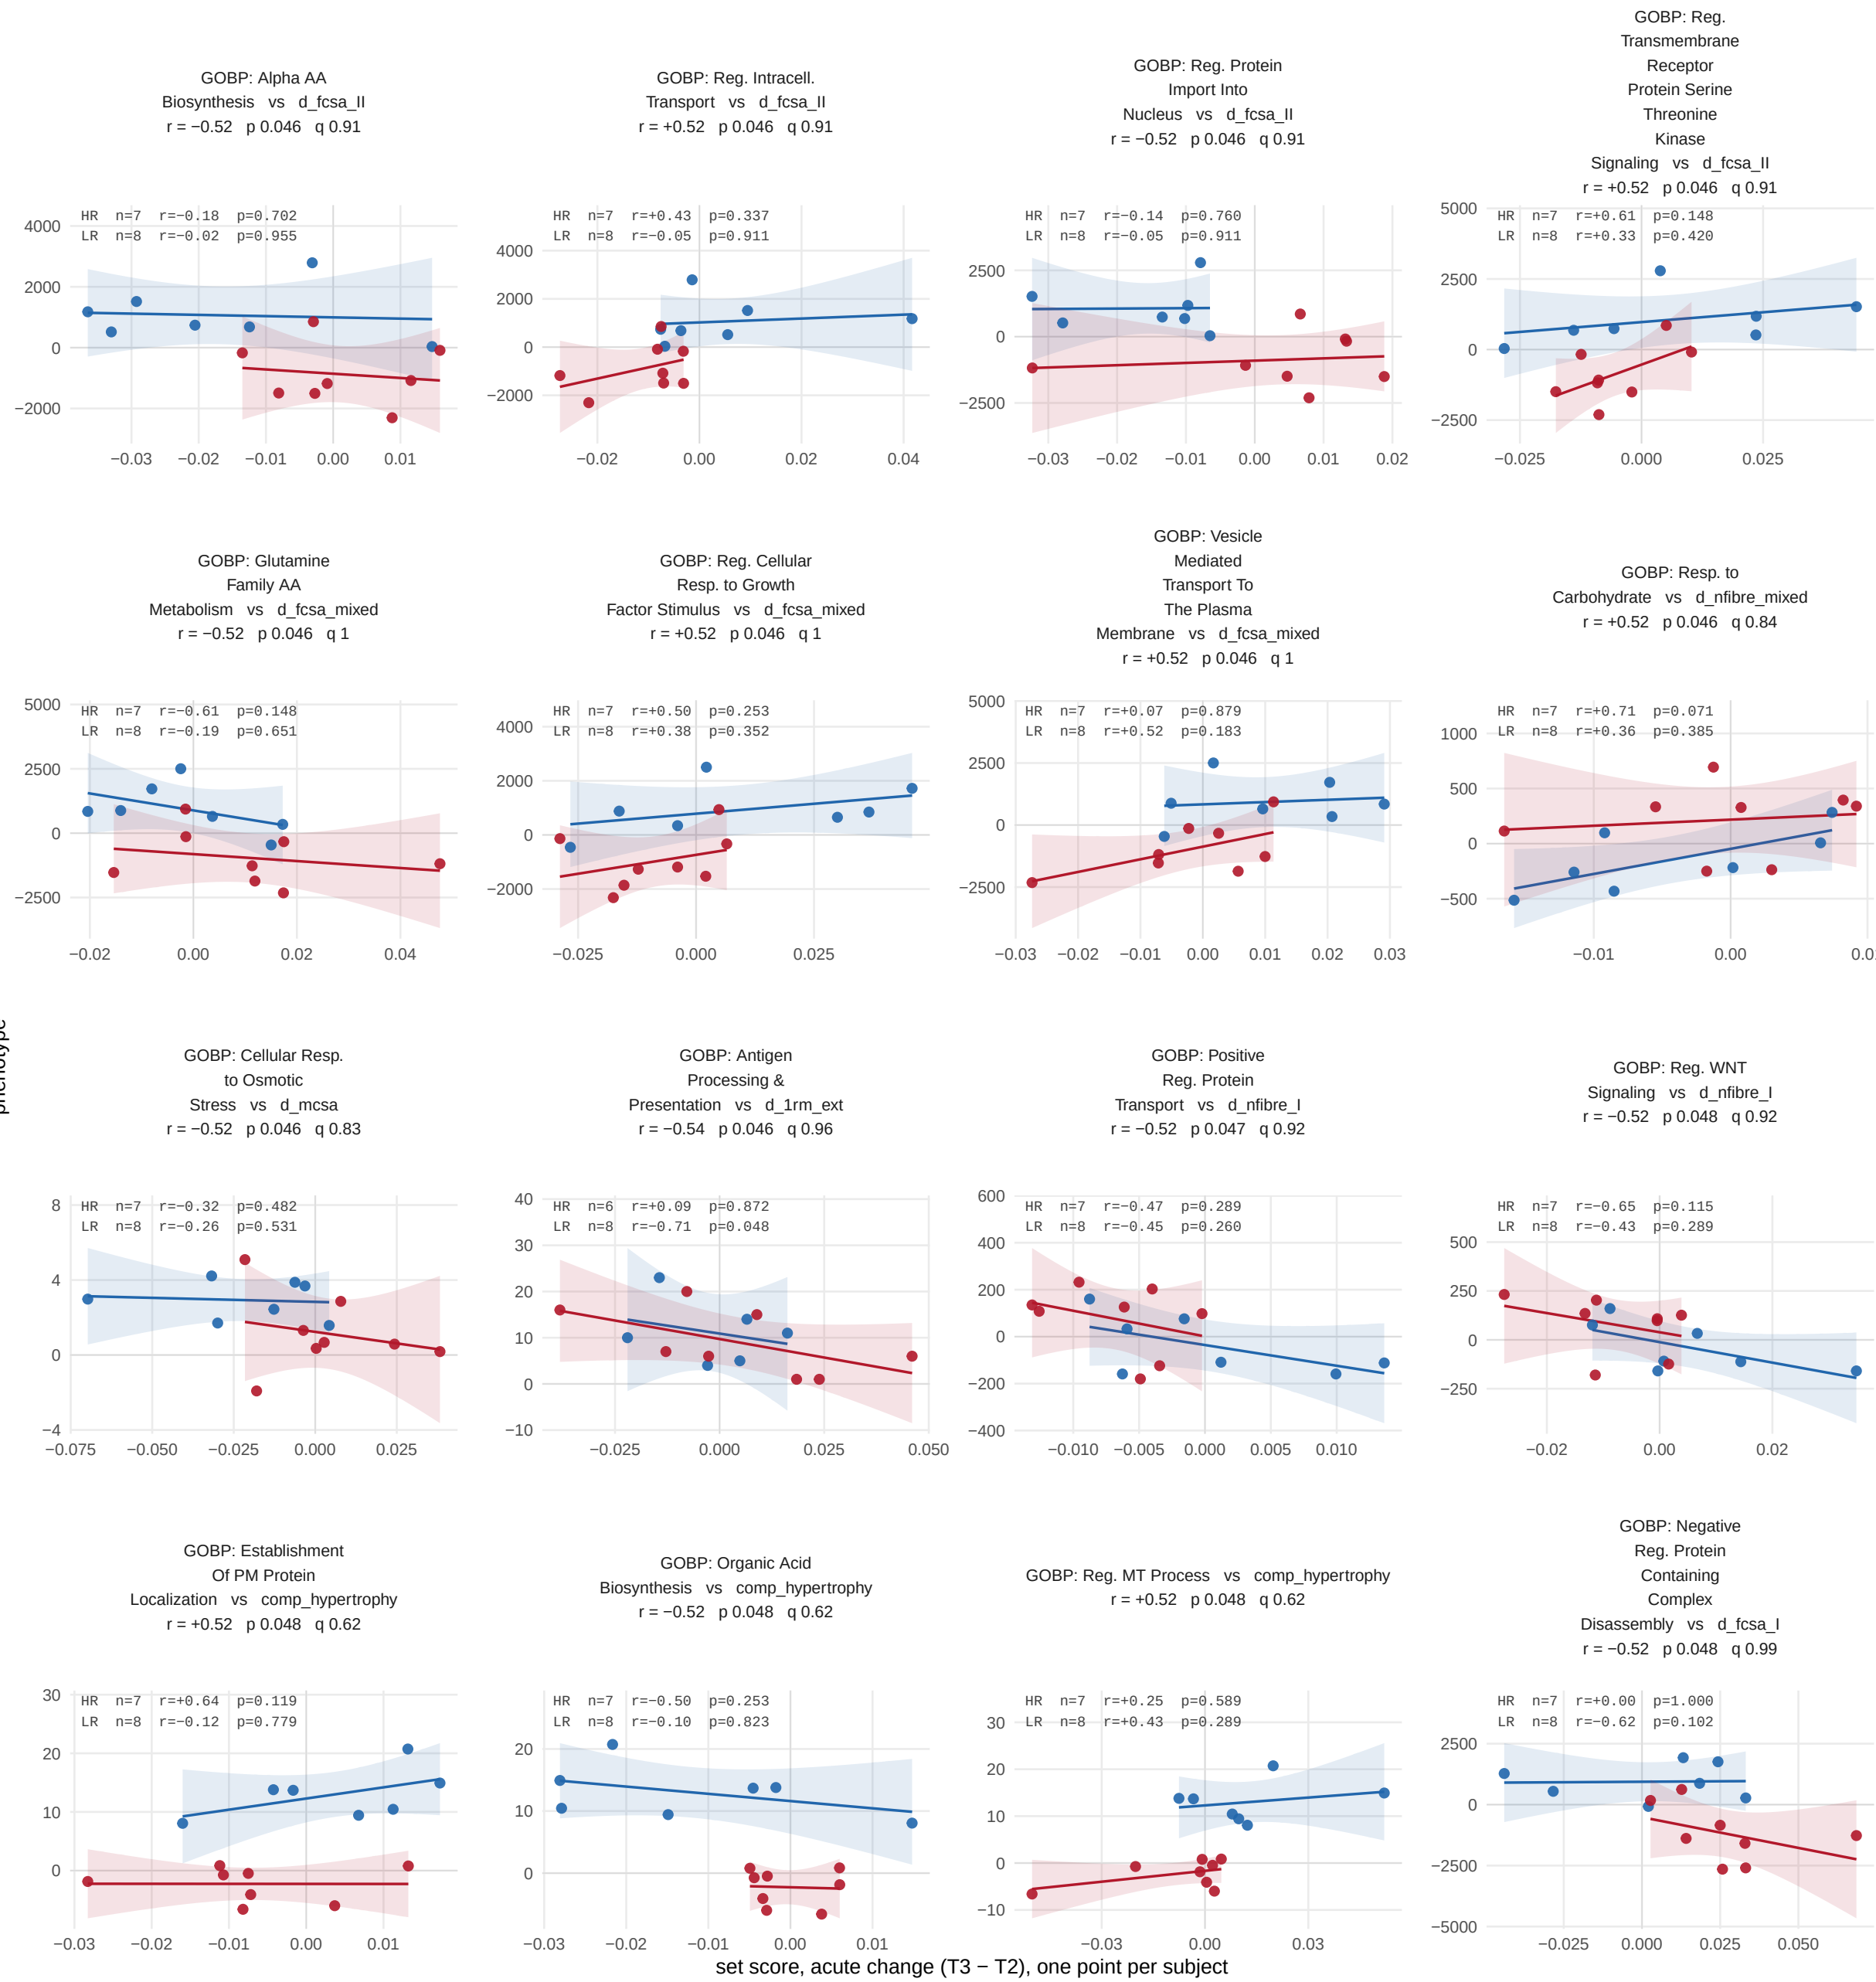


All 511 set-outcome pairs reaching nominal p, by collection then p. Lines are fitted within each arm; the header r is the pooled correlation, q from BH within collection, window and outcome. Nominal p, uncorrected. Each collection is read against its own expectation: GOBP 44.9 of 897, GO_Slim 2.9 of 58, Hallmark 1.7 of 33, KEGG_Legacy 3.1 of 62, Reactome 16.4 of 328.

Set score against phenotype, acute change (T3 – T2)

Spearman, subjects pooled across arms

HR LR

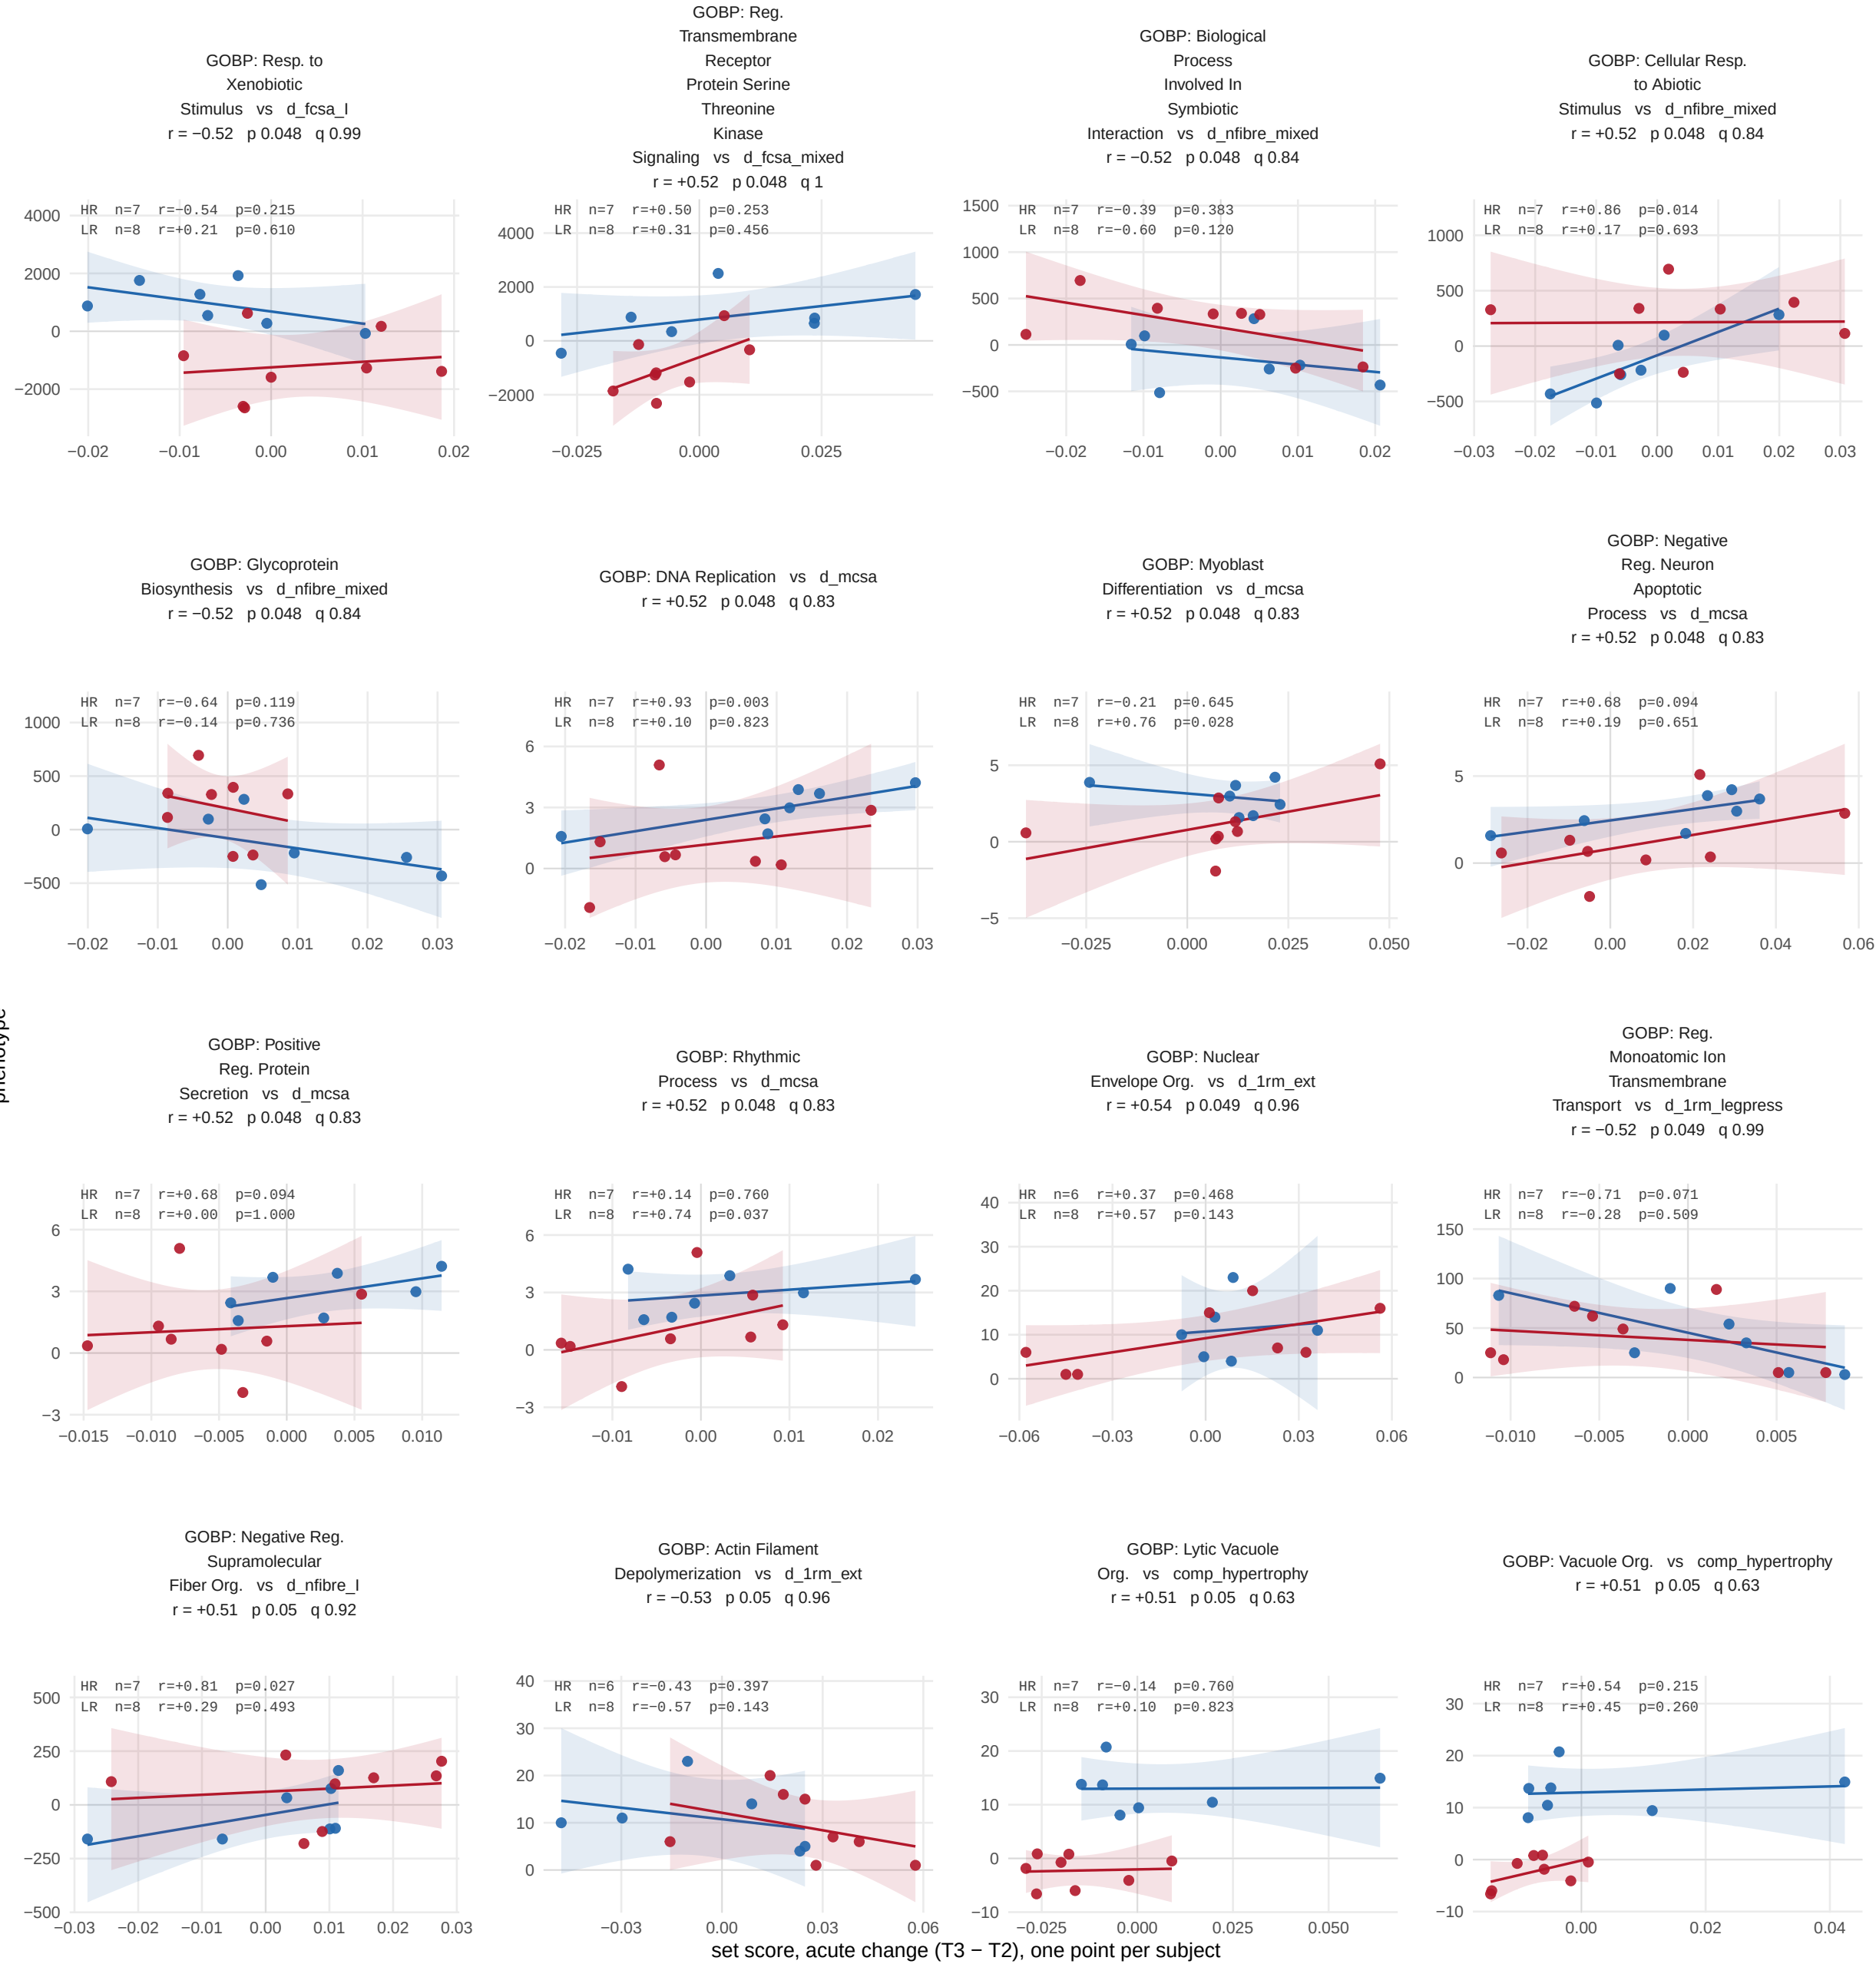


All 511 set-outcome pairs reaching nominal p, by collection then p. Lines are fitted within each arm; the header r is the pooled correlation, q from BH within collection, window and outcome. Nominal p, uncorrected. Each collection is read against its own expectation: GOBP 44.9 of 897, GO_Slim 2.9 of 58, Hallmark 1.7 of 33, KEGG_Legacy 3.1 of 62, Reactome 16.4 of 328.

Set score against phenotype, acute change (T3 – T2)

Spearman, subjects pooled across arms

HR LR

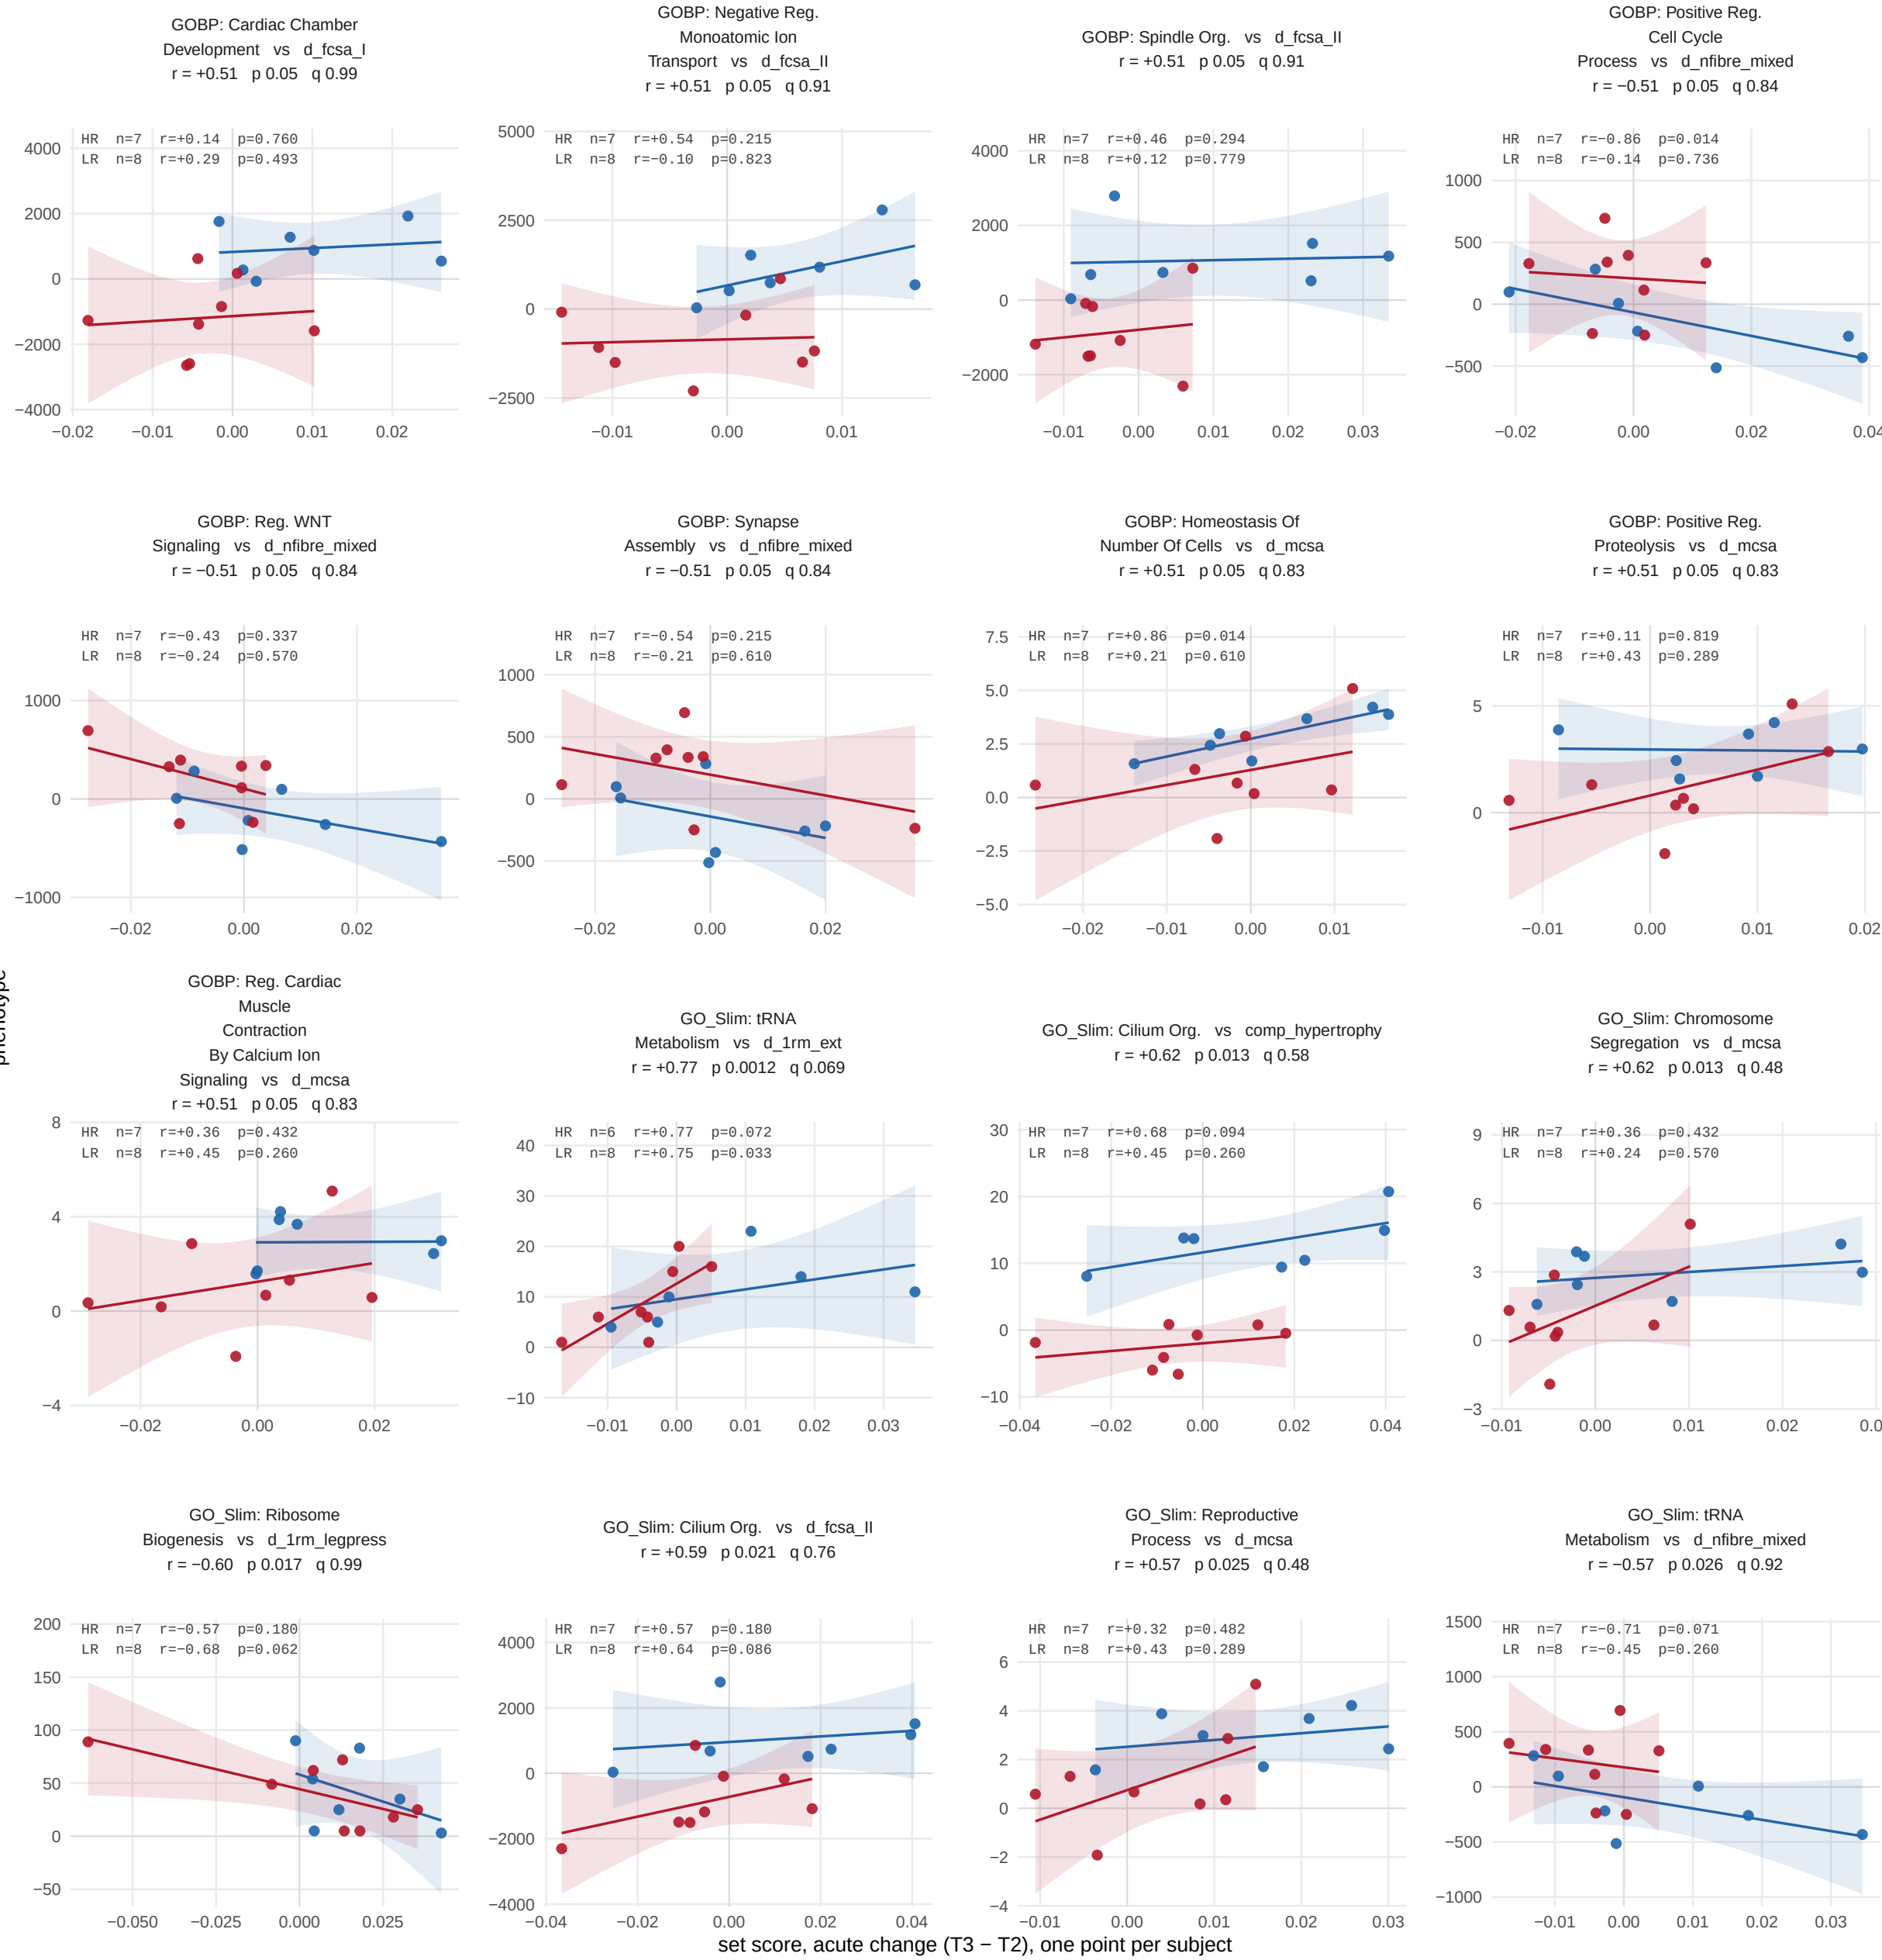


All 511 set-outcome pairs reaching nominal p, by collection then p. Lines are fitted within each arm; the header r is the pooled correlation, q from BH within collection, window and outcome. Nominal p, uncorrected. Each collection is read against its own expectation: GOBP 44.9 of 897, GO_Slim 2.9 of 58, Hallmark 1.7 of 33, KEGG_Legacy 3.1 of 62, Reactome 16.4 of 328.

Set score against phenotype, acute change (T3 – T2)

Spearman, subjects pooled across arms

HR LR

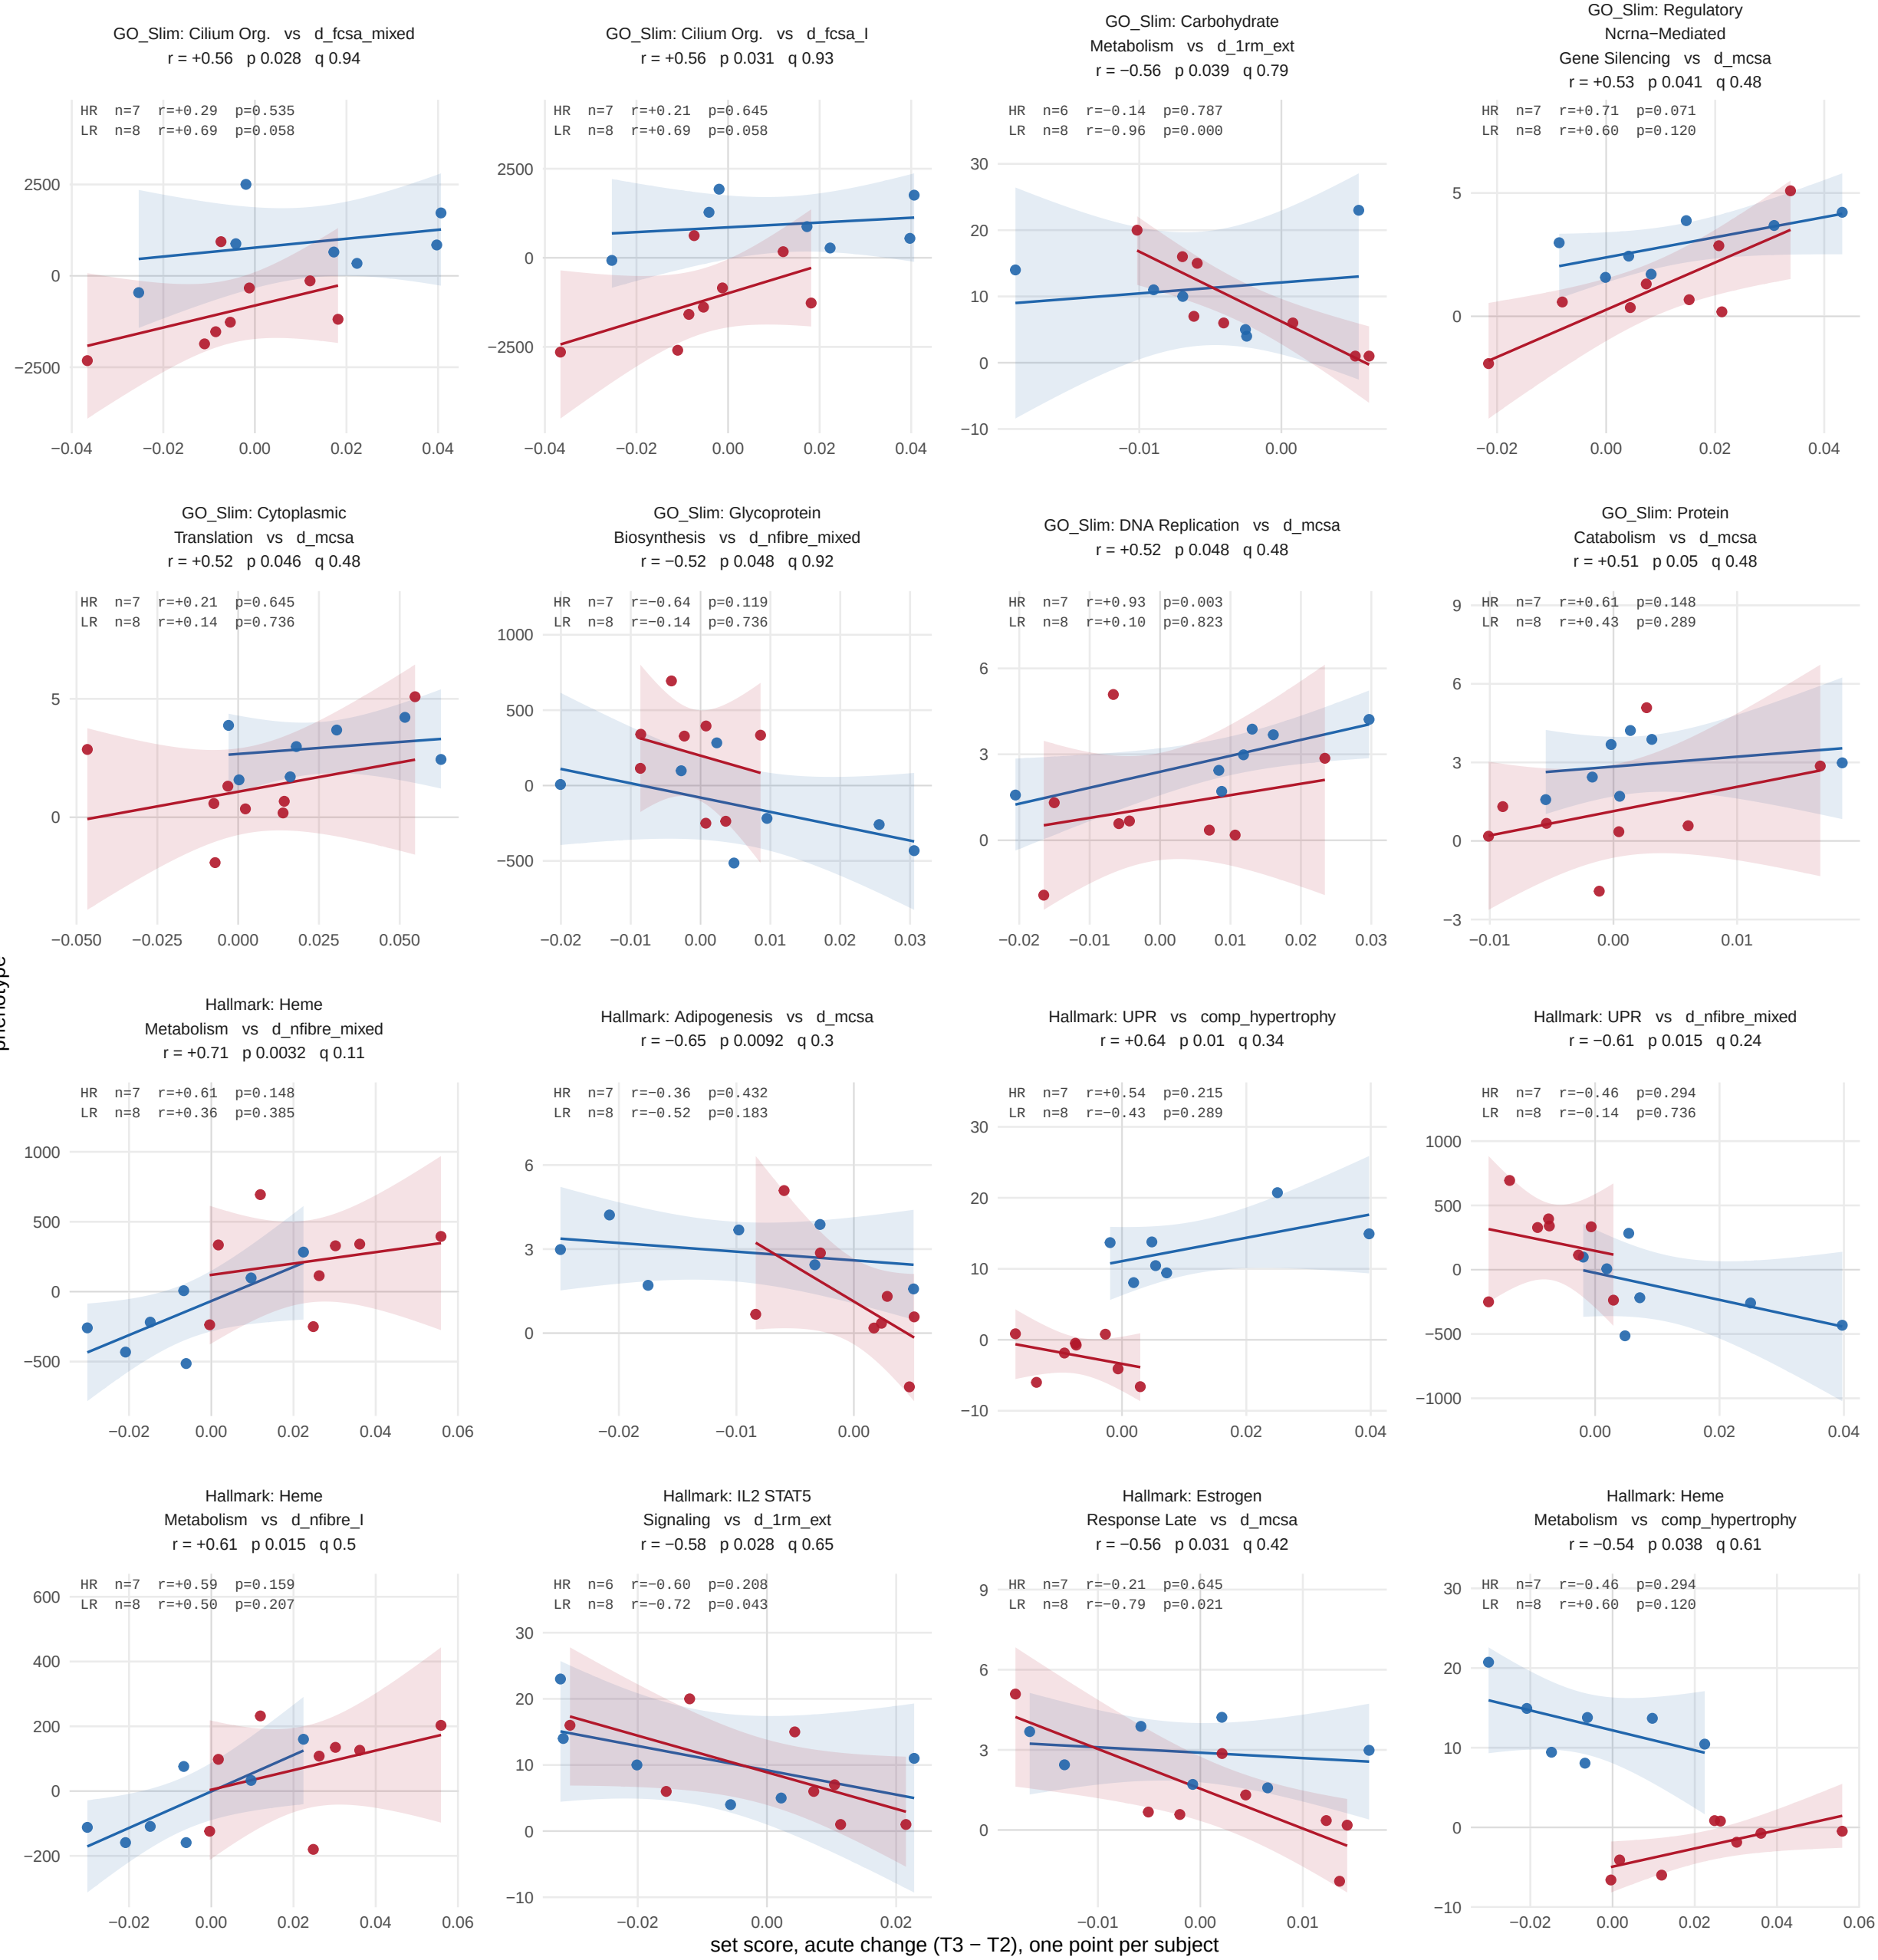


All 511 set-outcome pairs reaching nominal p, by collection then p. Lines are fitted within each arm; the header r is the pooled correlation, q from BH within collection, window and outcome. Nominal p, uncorrected. Each collection is read against its own expectation: GOBP 44.9 of 897, GO_Slim 2.9 of 58, Hallmark 1.7 of 33, KEGG_Legacy 3.1 of 62, Reactome 16.4 of 328.

Set score against phenotype, acute change (T3 – T2)

Spearman, subjects pooled across arms

HR LR

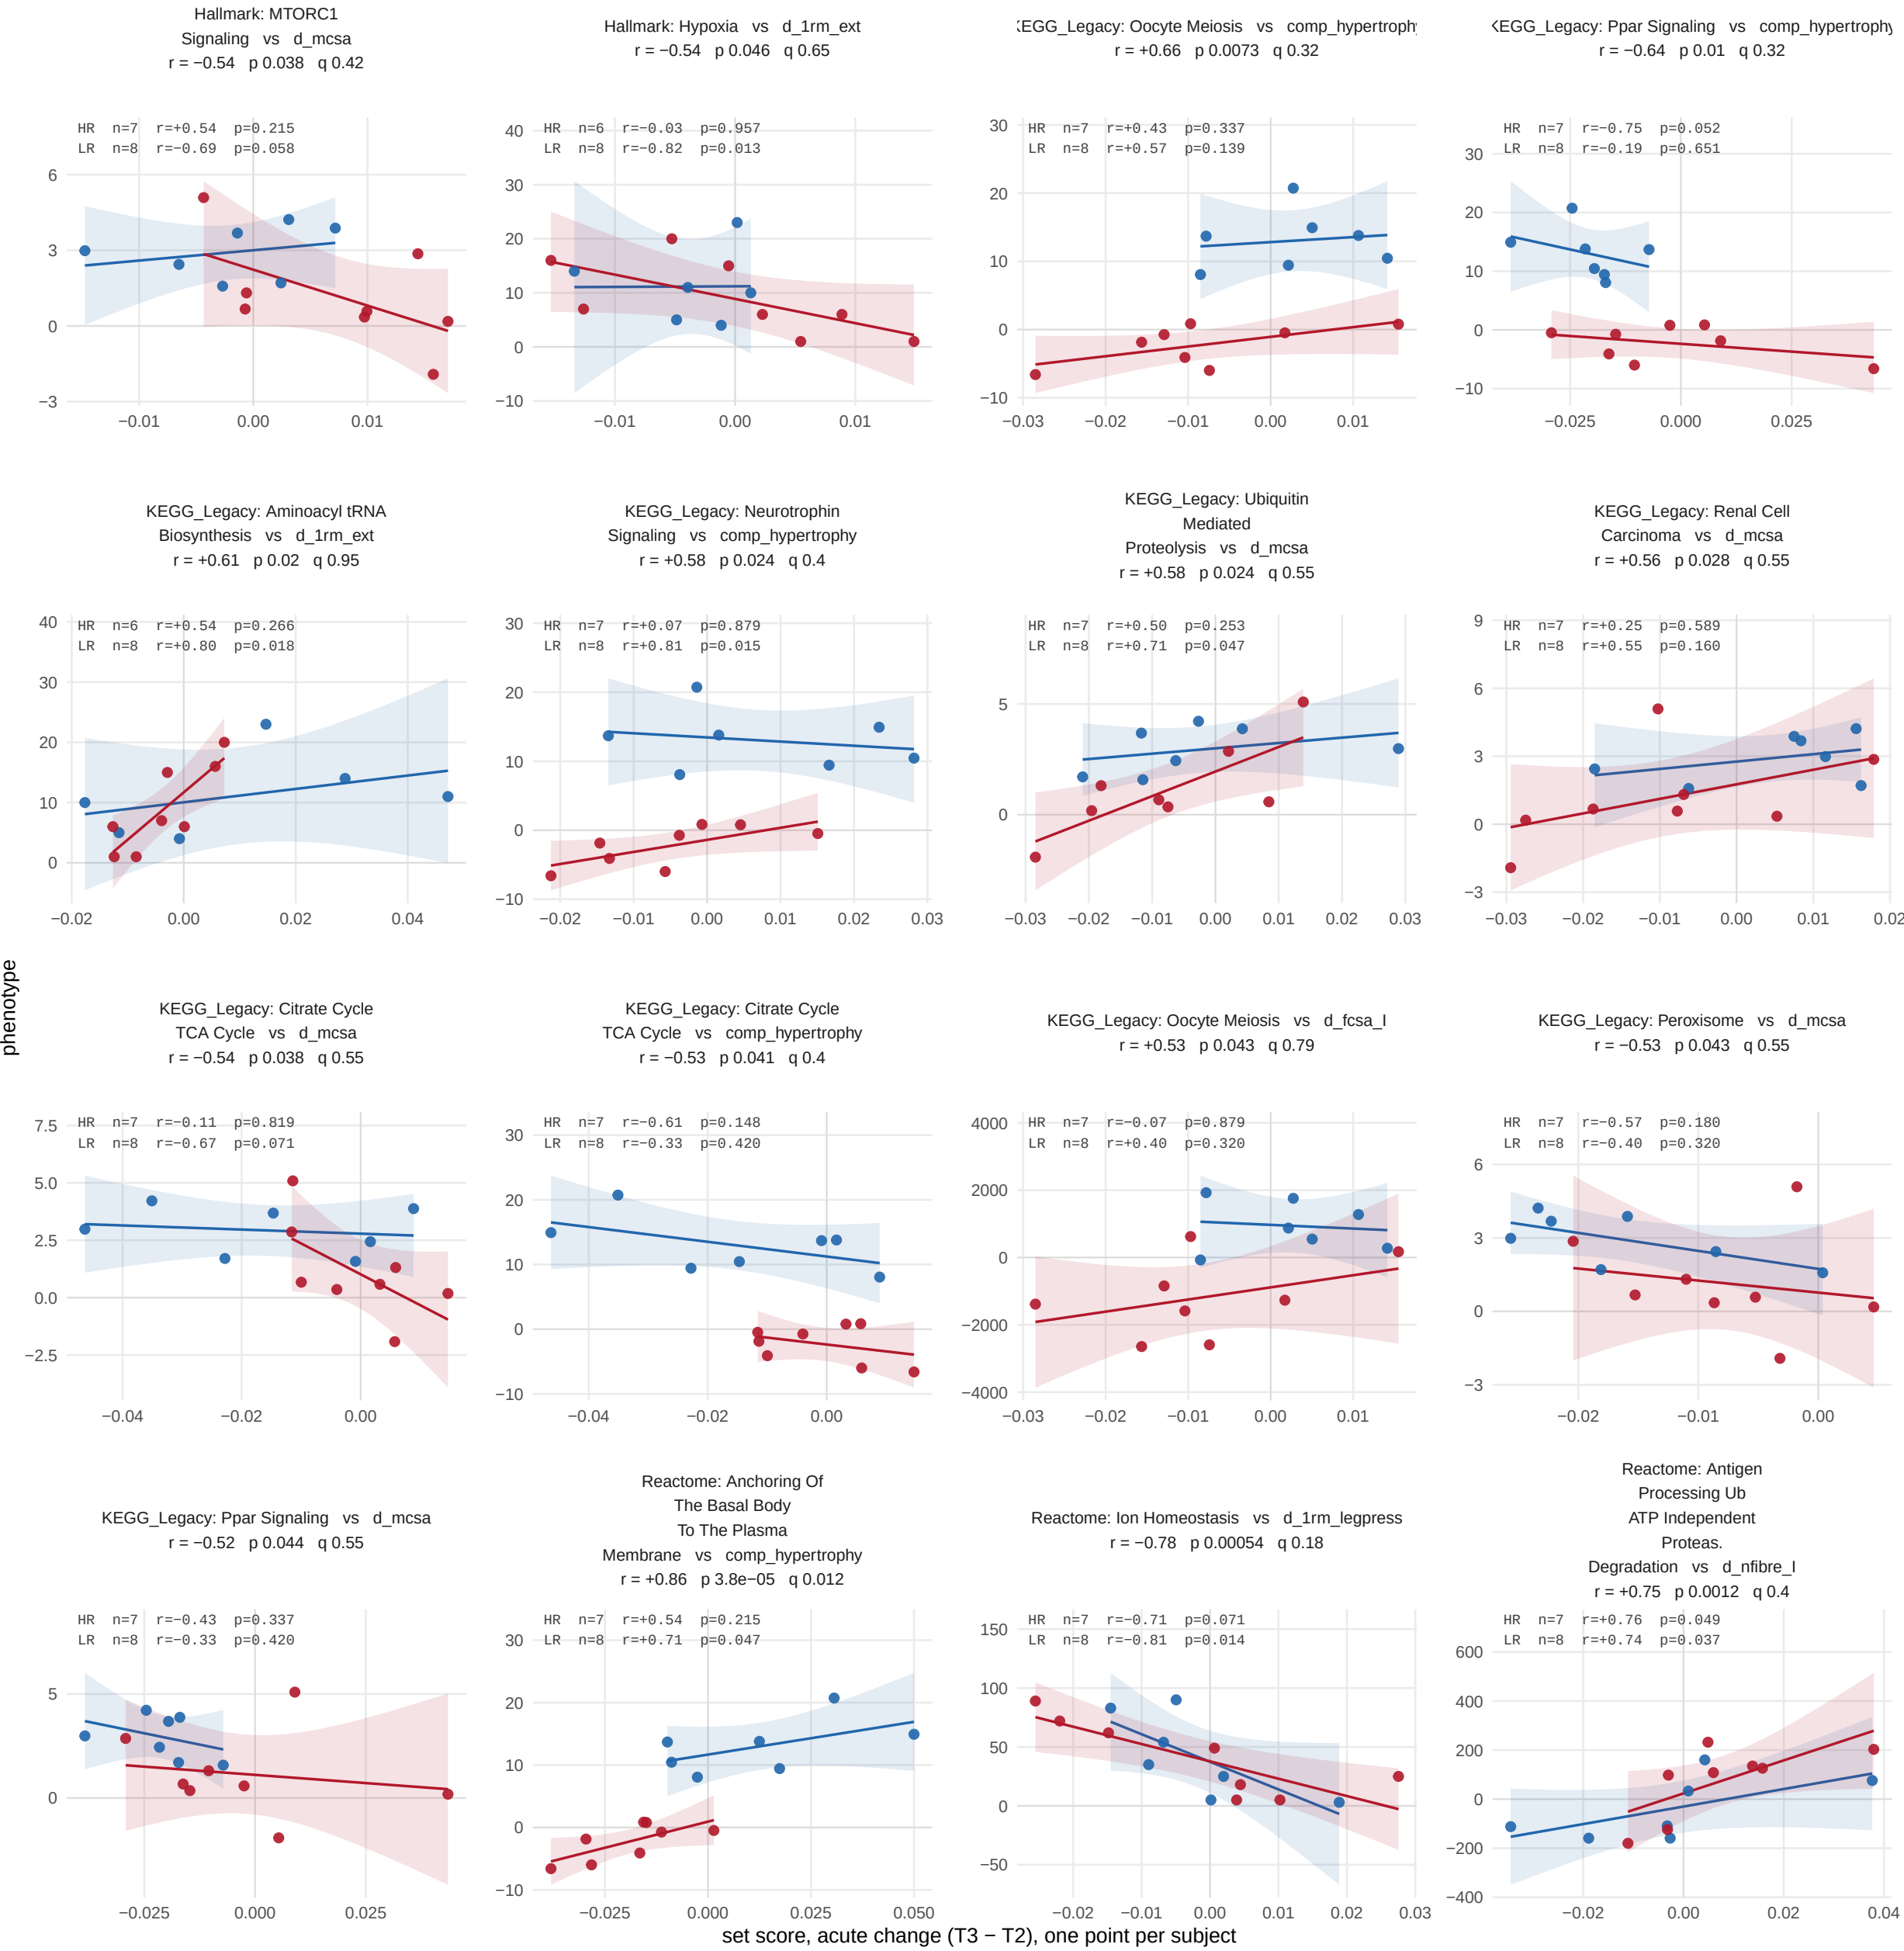


All 511 set-outcome pairs reaching nominal p, by collection then p. Lines are fitted within each arm; the header r is the pooled correlation, q from BH within collection, window and outcome. Nominal p, uncorrected. Each collection is read against its own expectation: GOBP 44.9 of 897, GO_Slim 2.9 of 58, Hallmark 1.7 of 33, KEGG_Legacy 3.1 of 62, Reactome 16.4 of 328.

Set score against phenotype, acute change (T3 – T2)

Spearman, subjects pooled across arms

HR LR

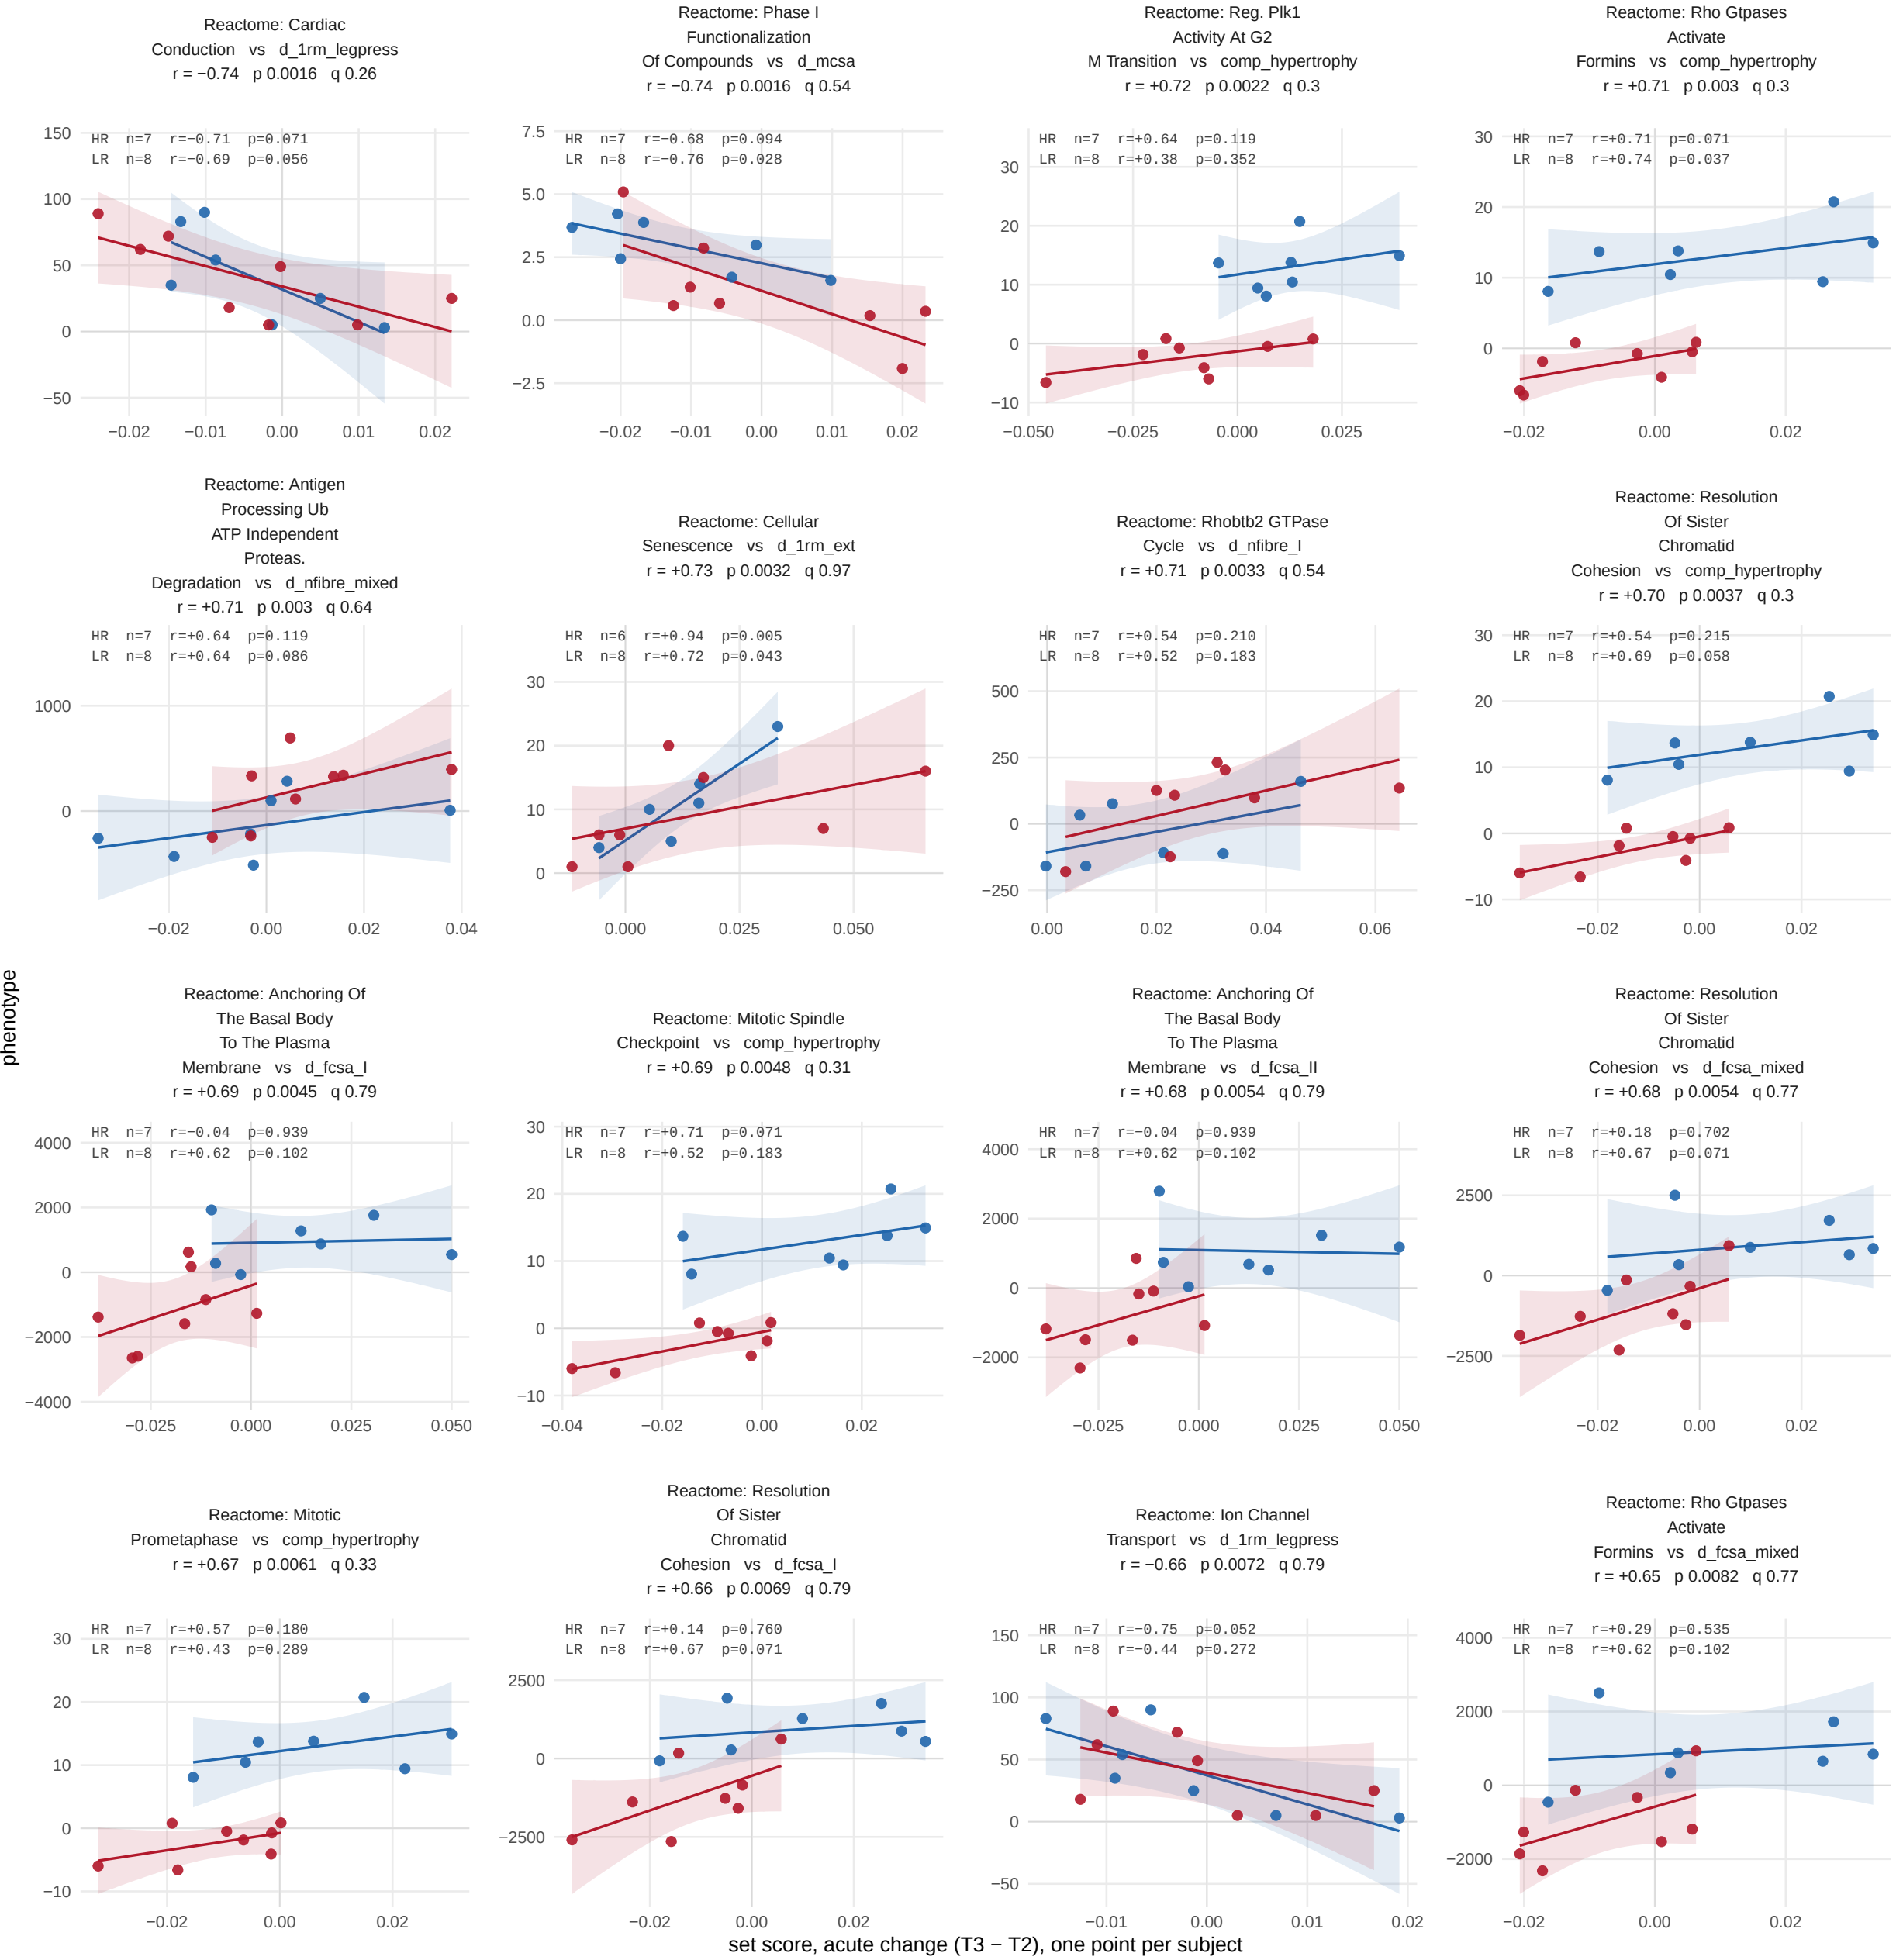


All 511 set-outcome pairs reaching nominal p, by collection then p. Lines are fitted within each arm; the header r is the pooled correlation, q from BH within collection, window and outcome. Nominal p, uncorrected. Each collection is read against its own expectation: GOBP 44.9 of 897, GO_Slim 2.9 of 58, Hallmark 1.7 of 33, KEGG_Legacy 3.1 of 62, Reactome 16.4 of 328.

Set score against phenotype, acute change (T3 – T2)

Spearman, subjects pooled across arms

HR LR

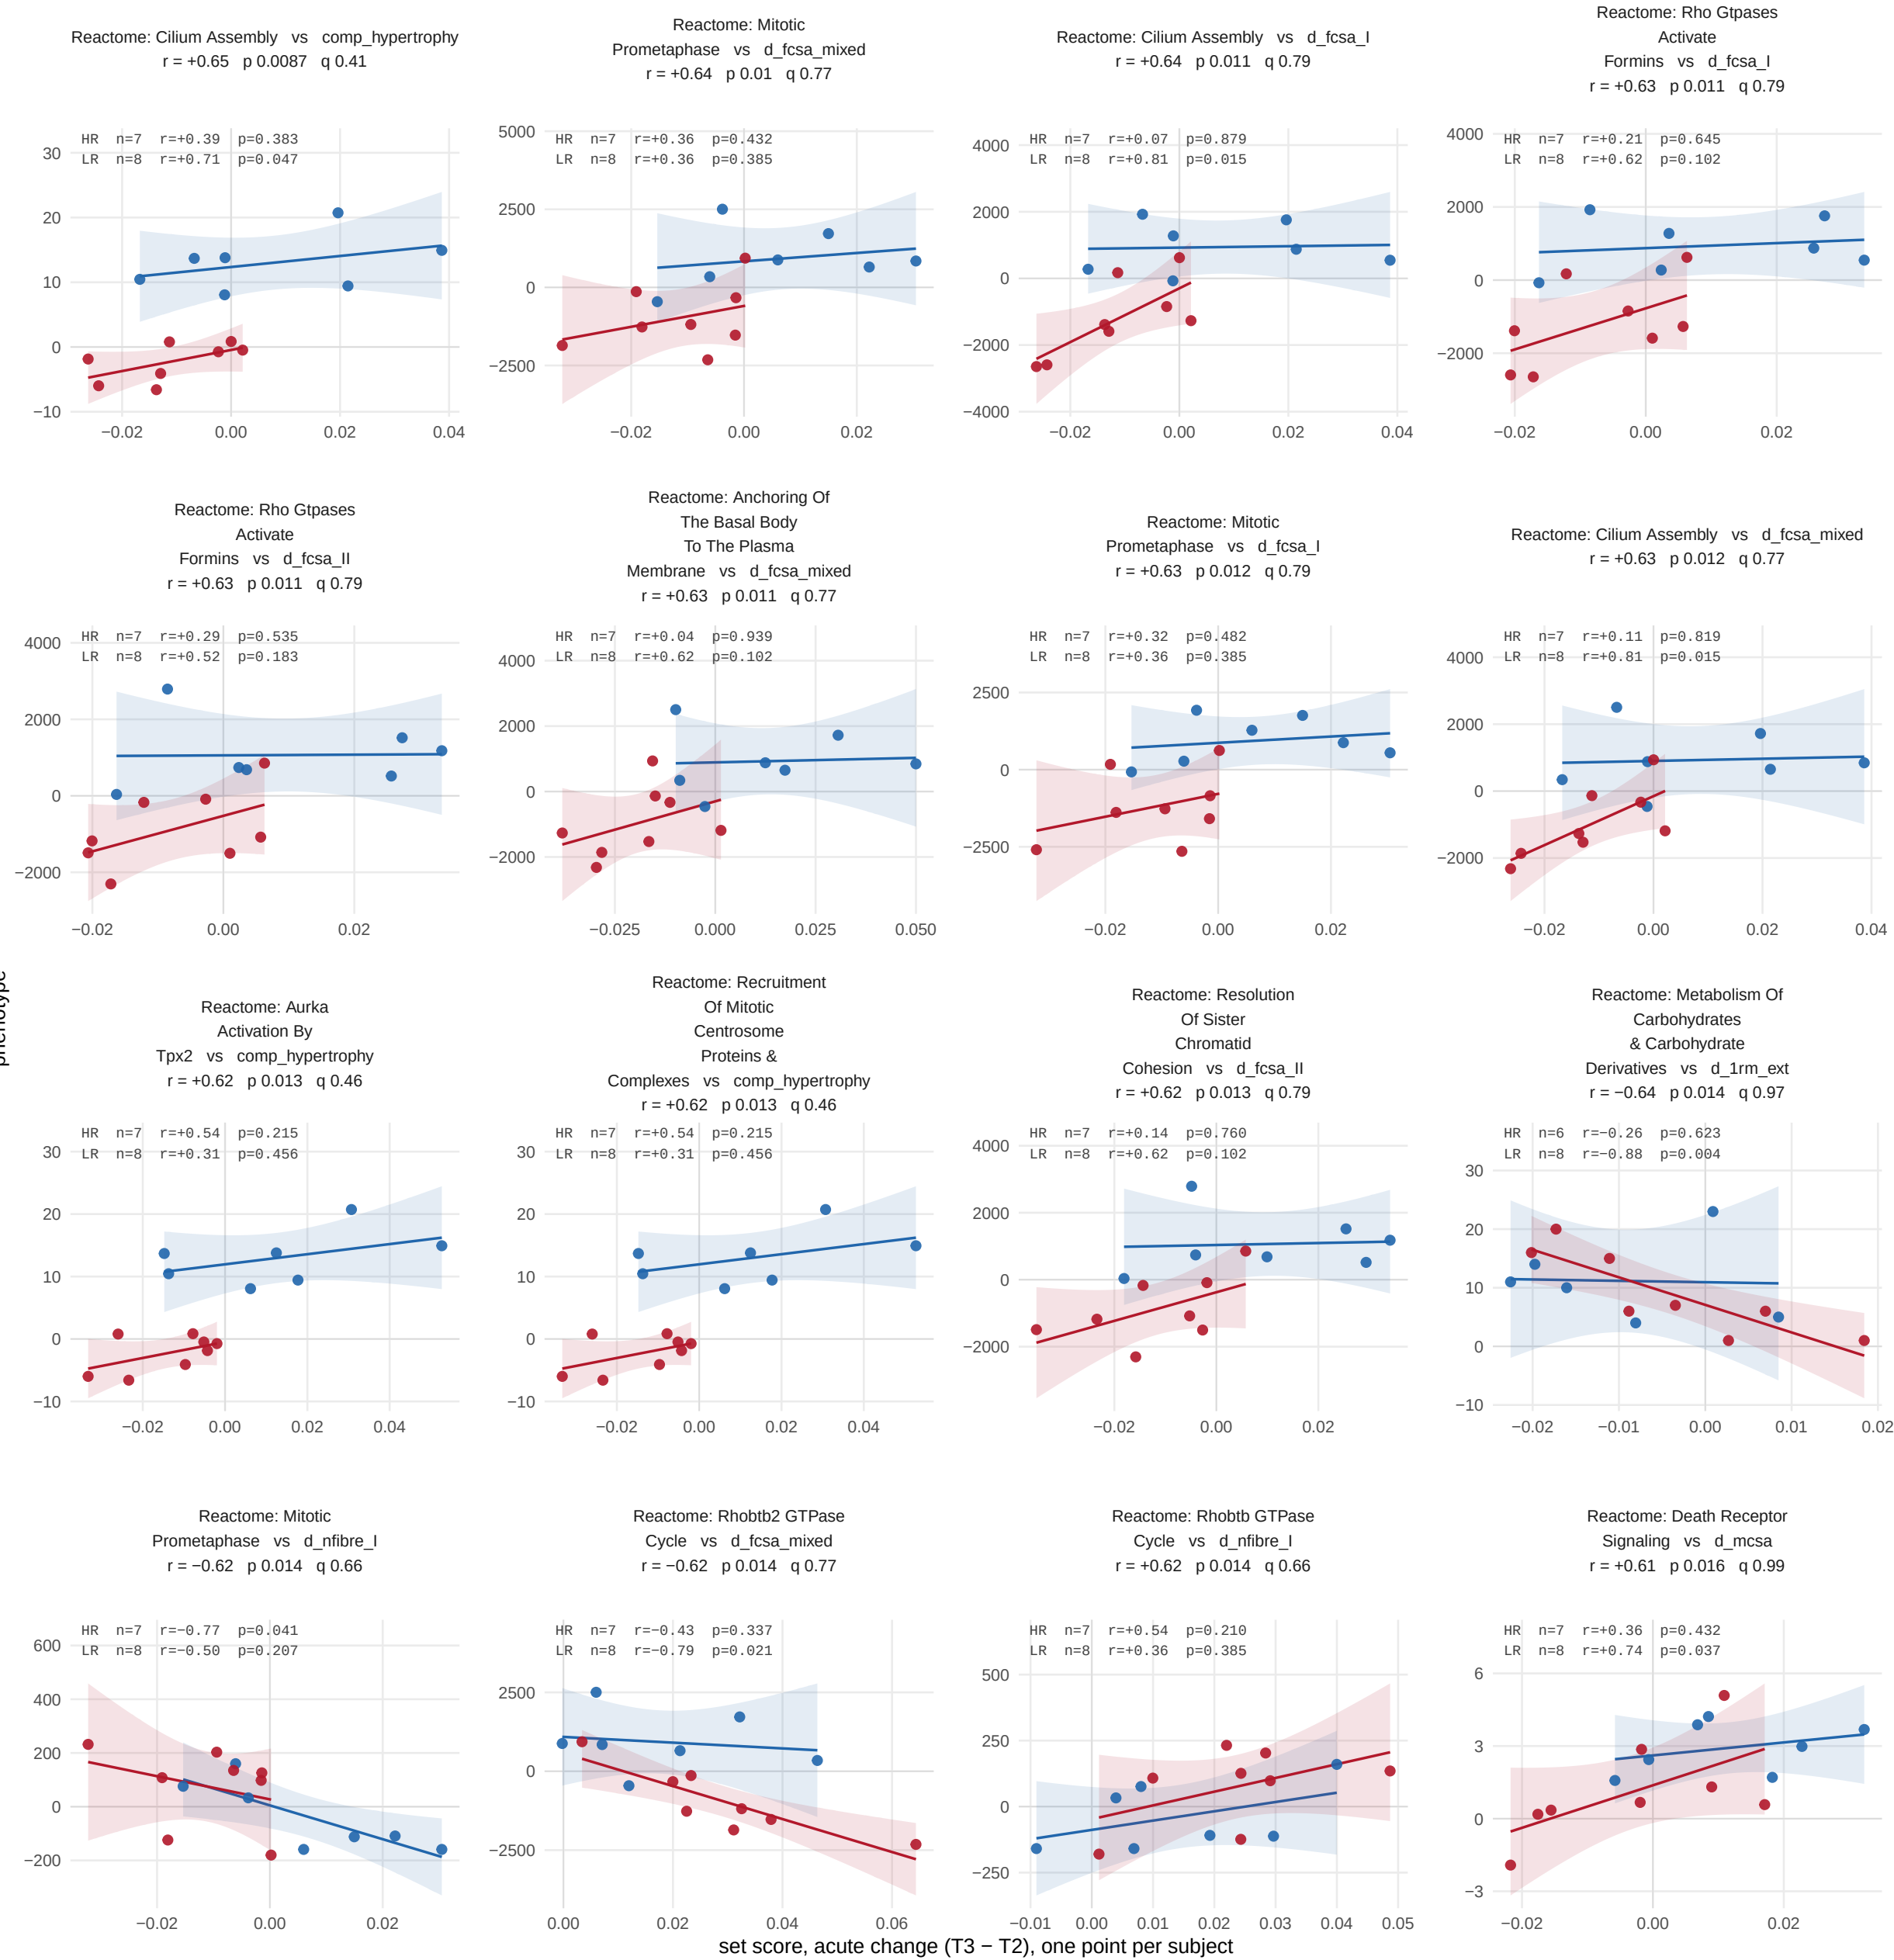


All 511 set-outcome pairs reaching nominal p, by collection then p. Lines are fitted within each arm; the header r is the pooled correlation, q from BH within collection, window and outcome. Nominal p, uncorrected. Each collection is read against its own expectation: GOBP 44.9 of 897, GO_Slim 2.9 of 58, Hallmark 1.7 of 33, KEGG_Legacy 3.1 of 62, Reactome 16.4 of 328.

Set score against phenotype, acute change (T3 – T2)

Spearman, subjects pooled across arms

HR LR

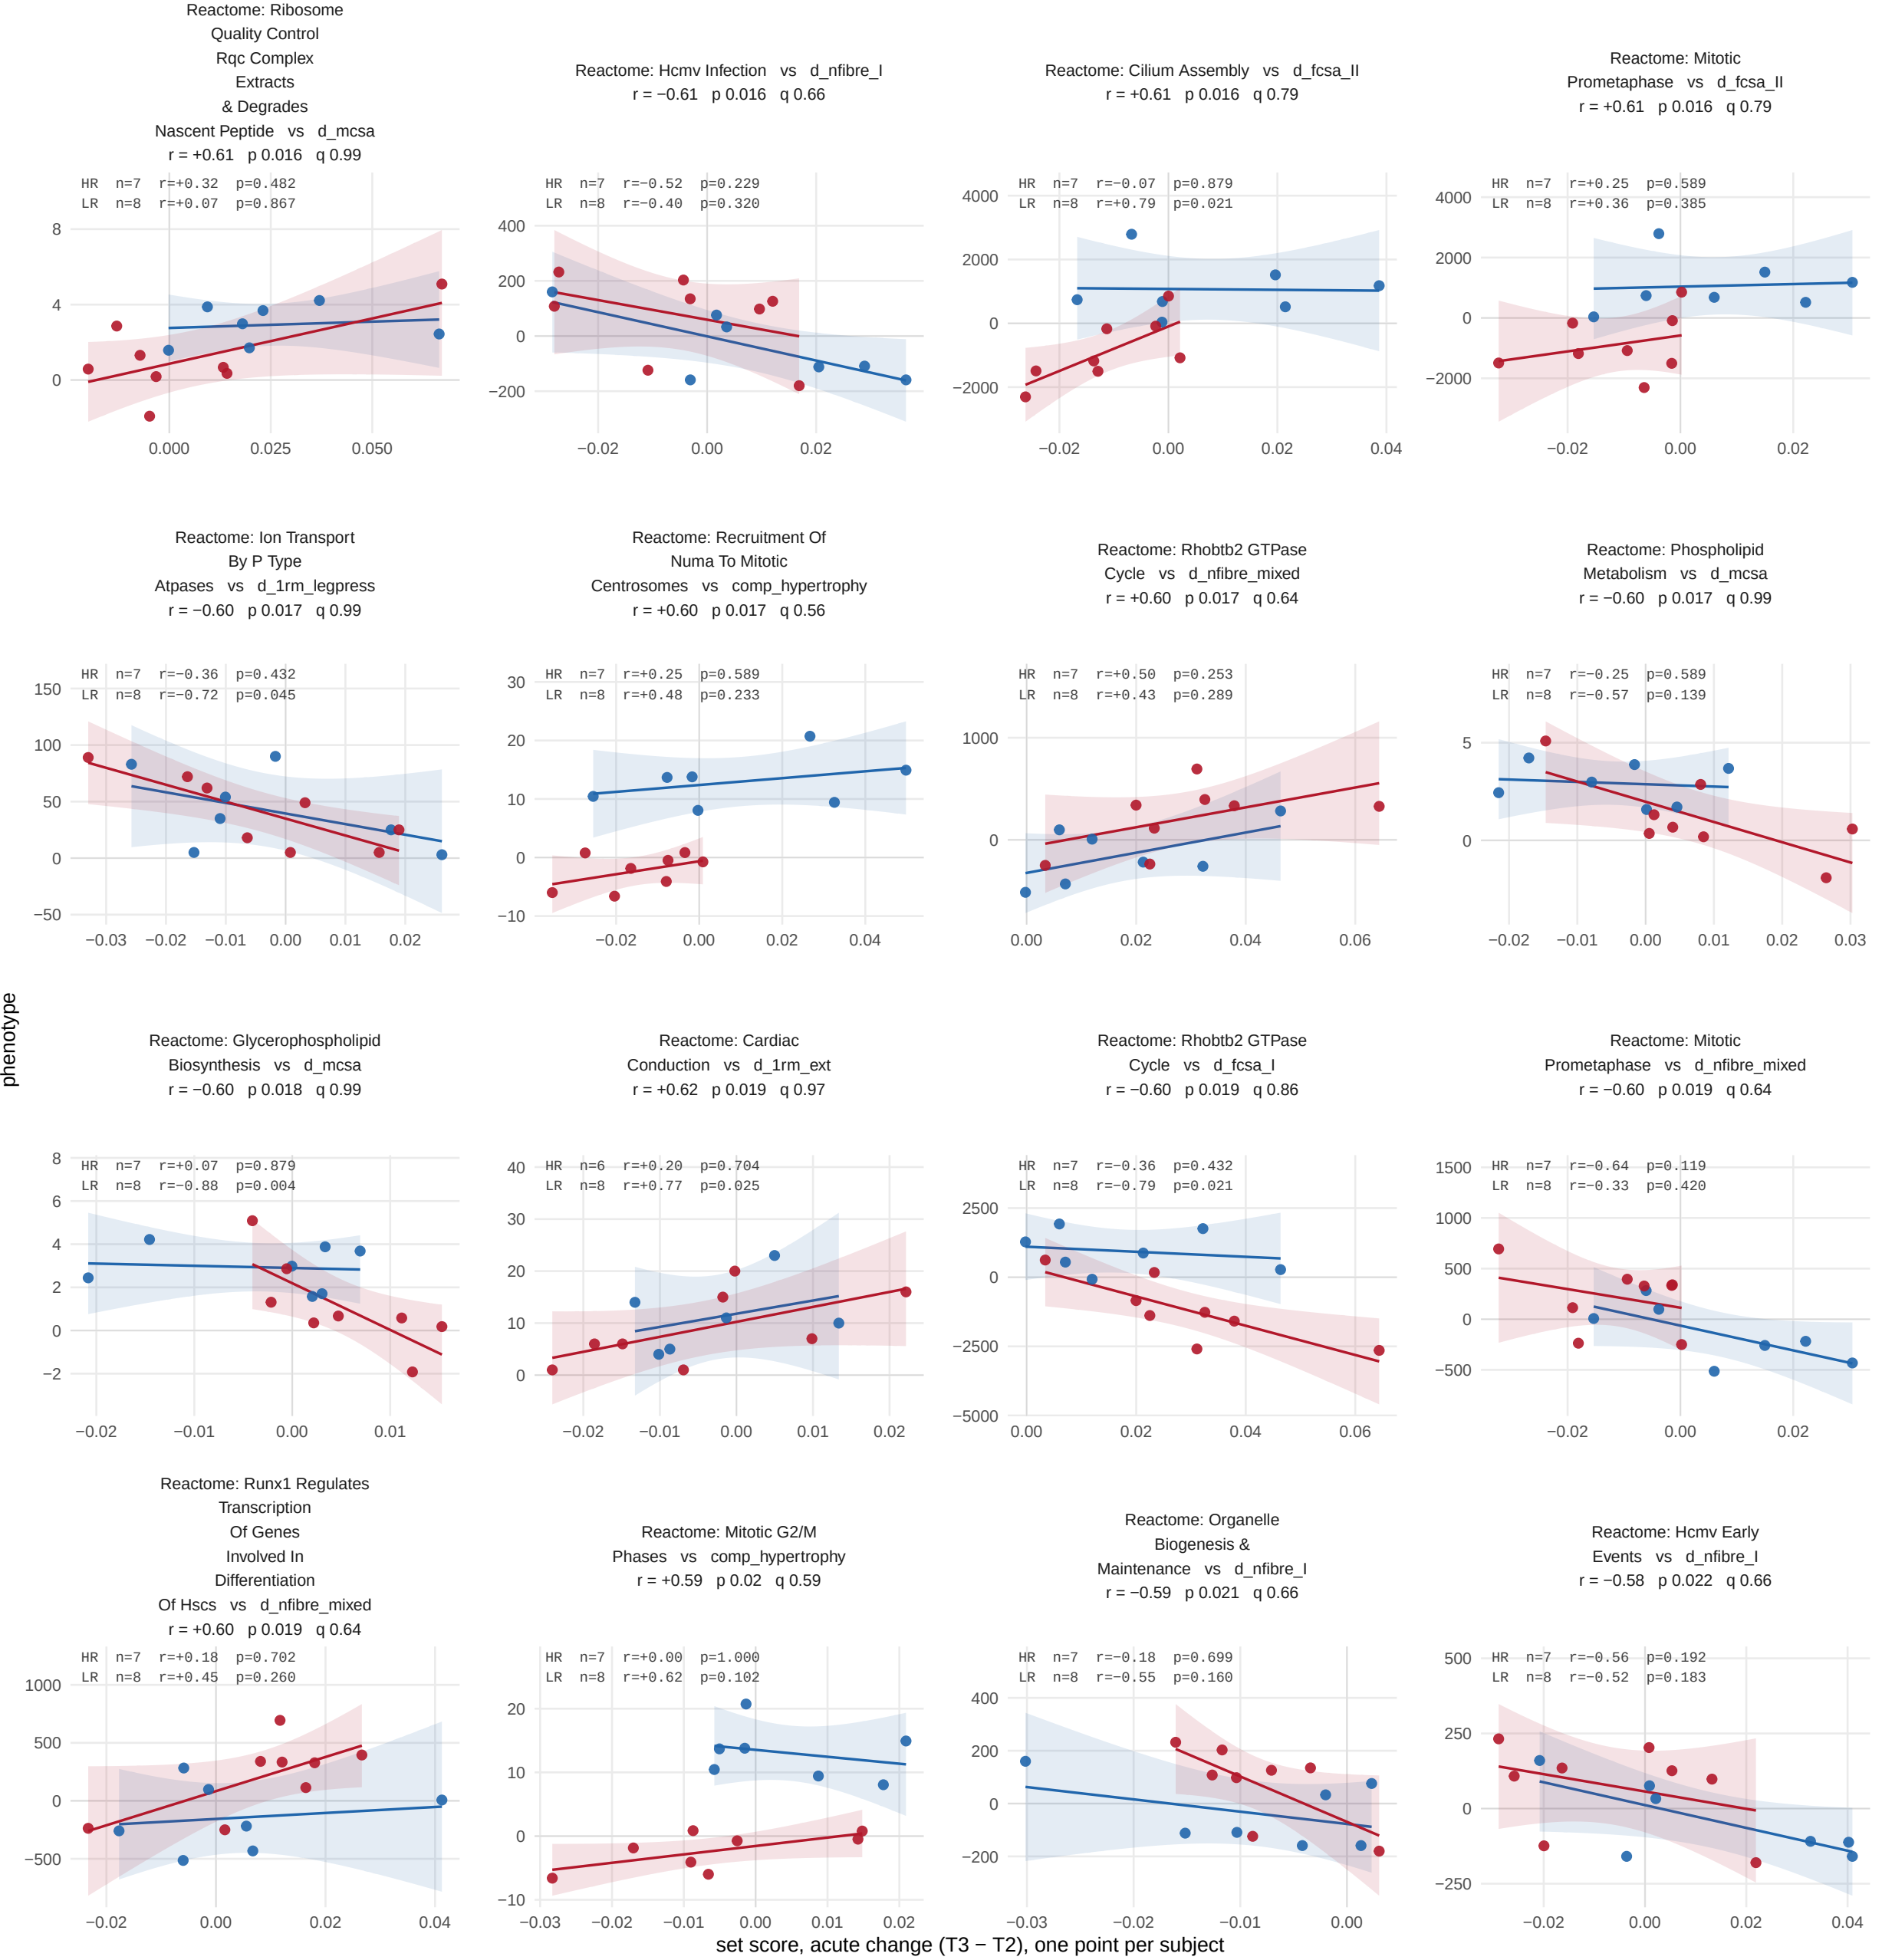


All 511 set-outcome pairs reaching nominal p, by collection then p. Lines are fitted within each arm; the header r is the pooled correlation, q from BH within collection, window and outcome. Nominal p, uncorrected. Each collection is read against its own expectation: GOBP 44.9 of 897, GO_Slim 2.9 of 58, Hallmark 1.7 of 33, KEGG_Legacy 3.1 of 62, Reactome 16.4 of 328.

Set score against phenotype, acute change (T3 – T2)

Spearman, subjects pooled across arms

HR LR

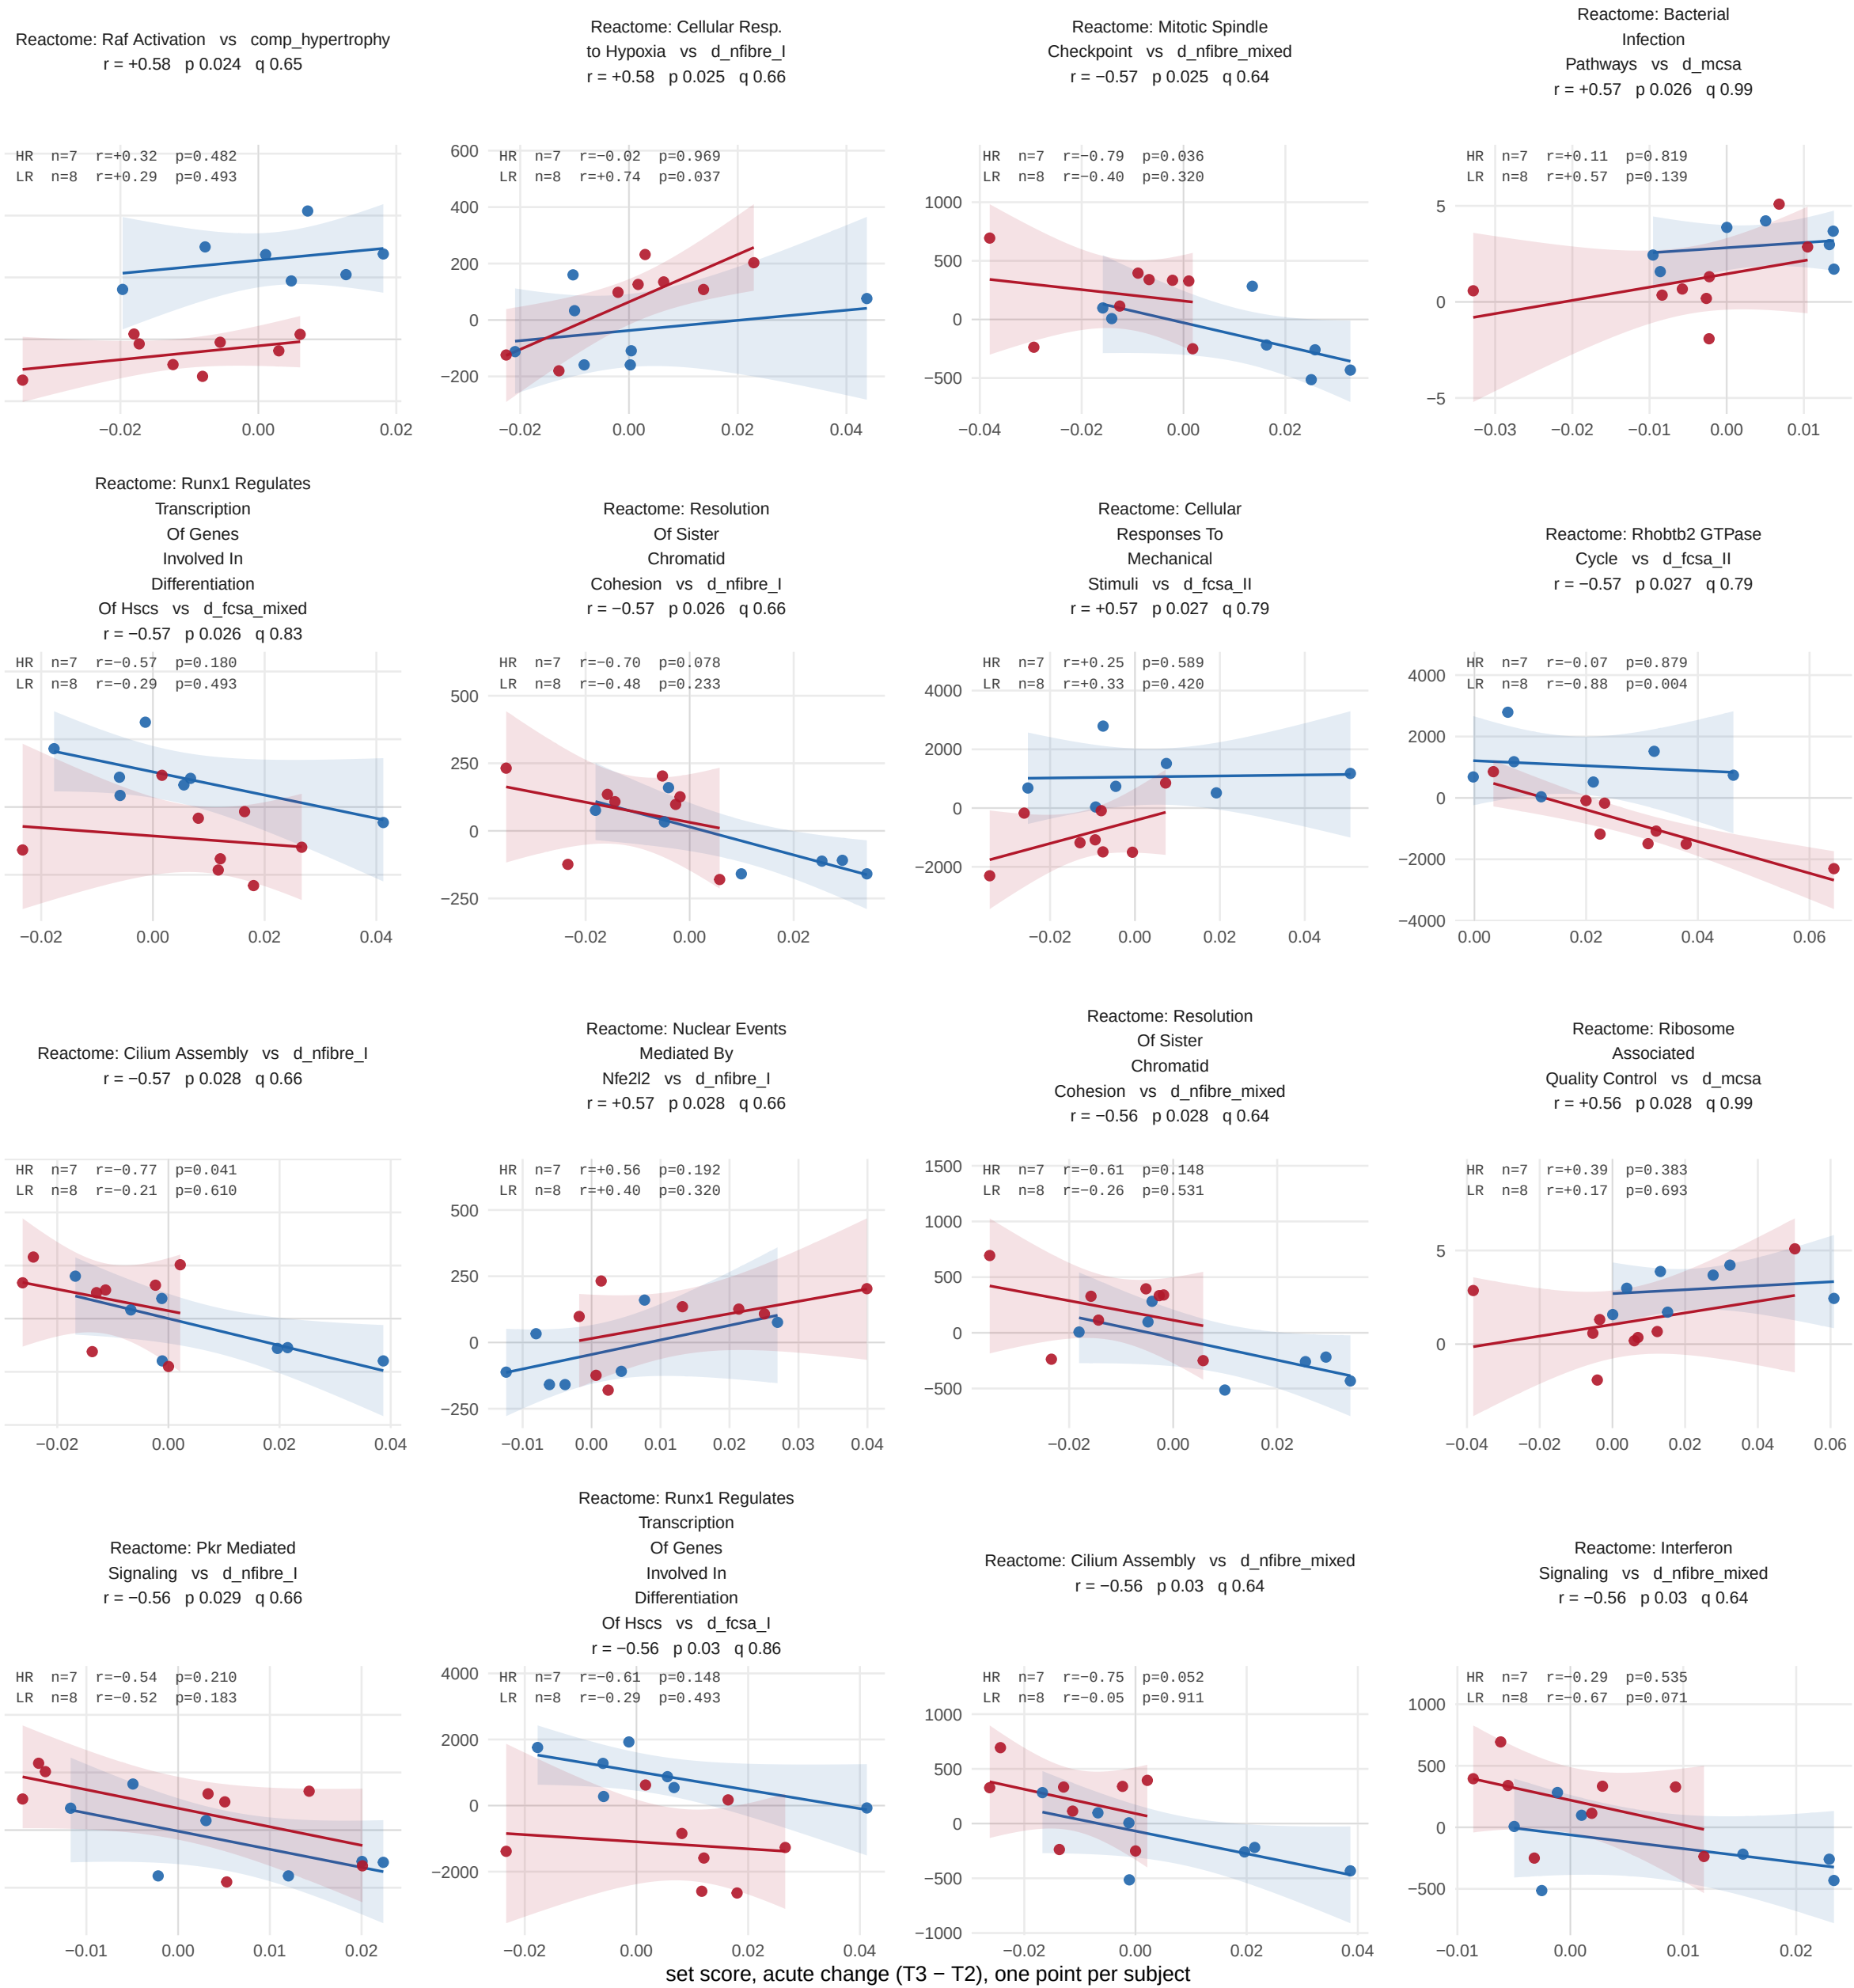


All 511 set-outcome pairs reaching nominal p, by collection then p. Lines are fitted within each arm; the header r is the pooled correlation, q from BH within collection, window and outcome. Nominal p, uncorrected. Each collection is read against its own expectation: GOBP 44.9 of 897, GO_Slim 2.9 of 58, Hallmark 1.7 of 33, KEGG_Legacy 3.1 of 62, Reactome 16.4 of 328.

Set score against phenotype, acute change (T3 – T2)

Spearman, subjects pooled across arms

HR LR

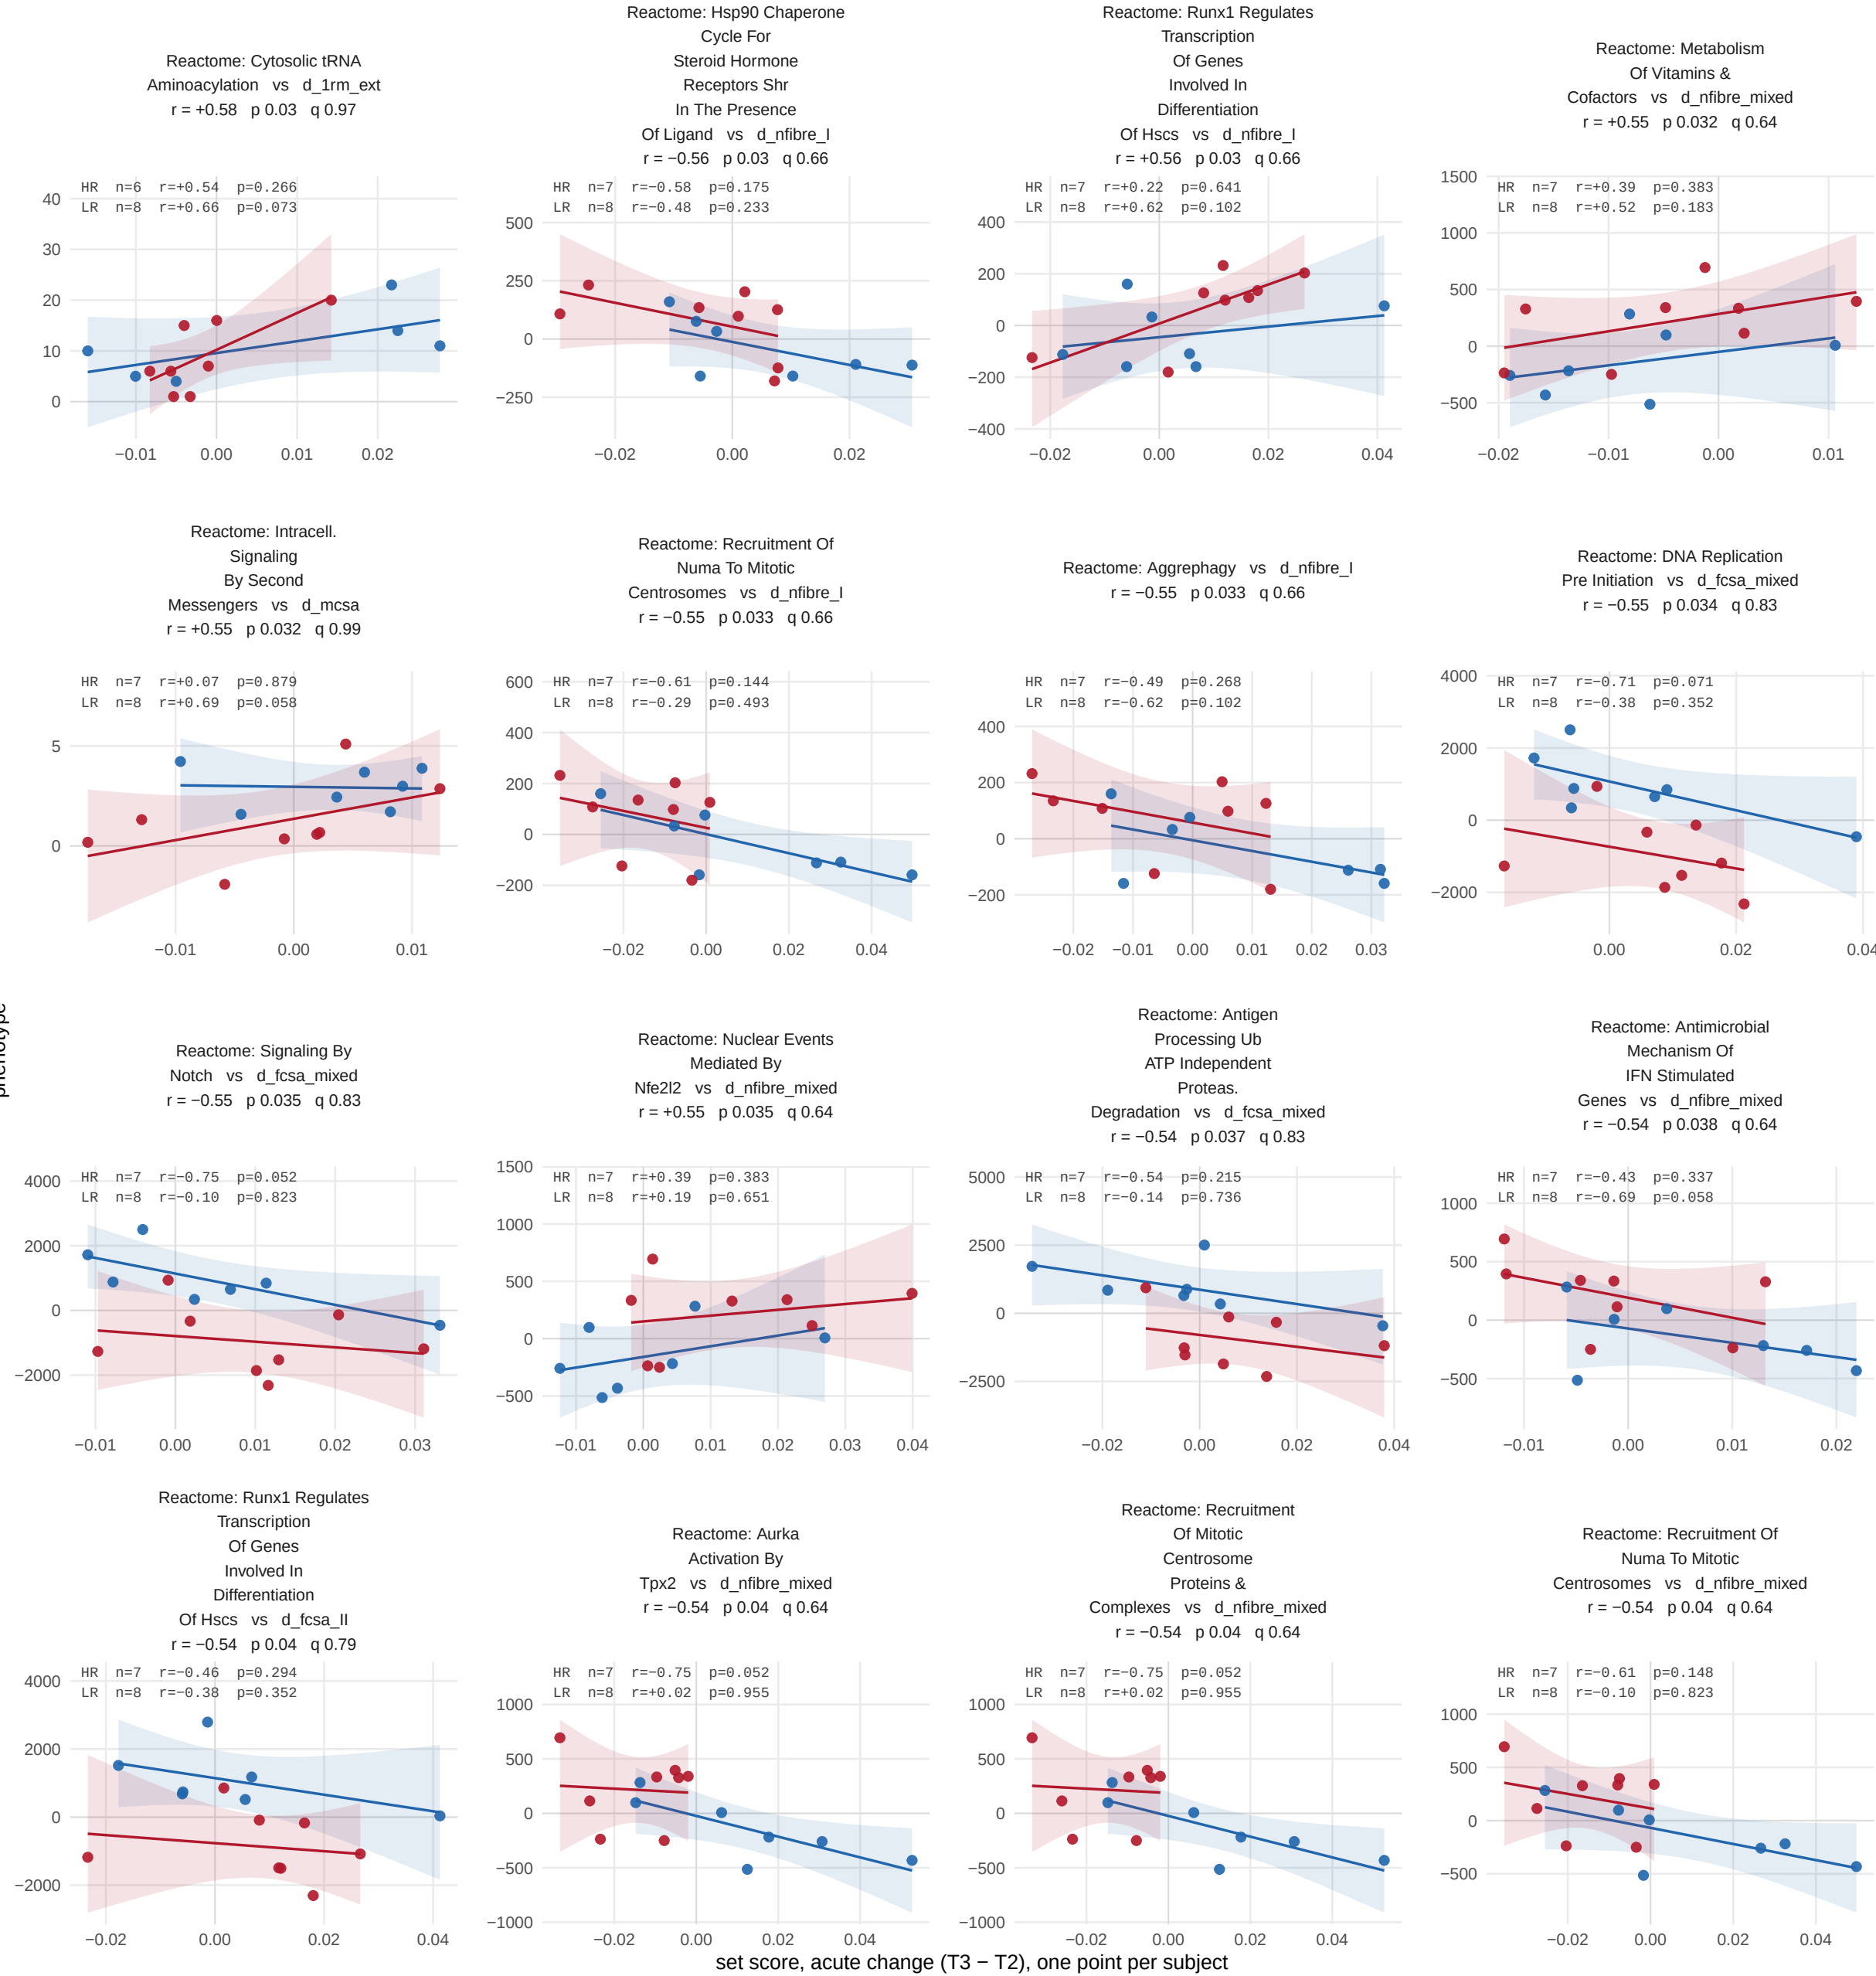


All 511 set-outcome pairs reaching nominal p, by collection then p. Lines are fitted within each arm; the header r is the pooled correlation, q from BH within collection, window and outcome. Nominal p, uncorrected. Each collection is read against its own expectation: GOBP 44.9 of 897, GO_Slim 2.9 of 58, Hallmark 1.7 of 33, KEGG_Legacy 3.1 of 62, Reactome 16.4 of 328.

Set score against phenotype, acute change (T3 – T2)

Spearman, subjects pooled across arms

HR LR

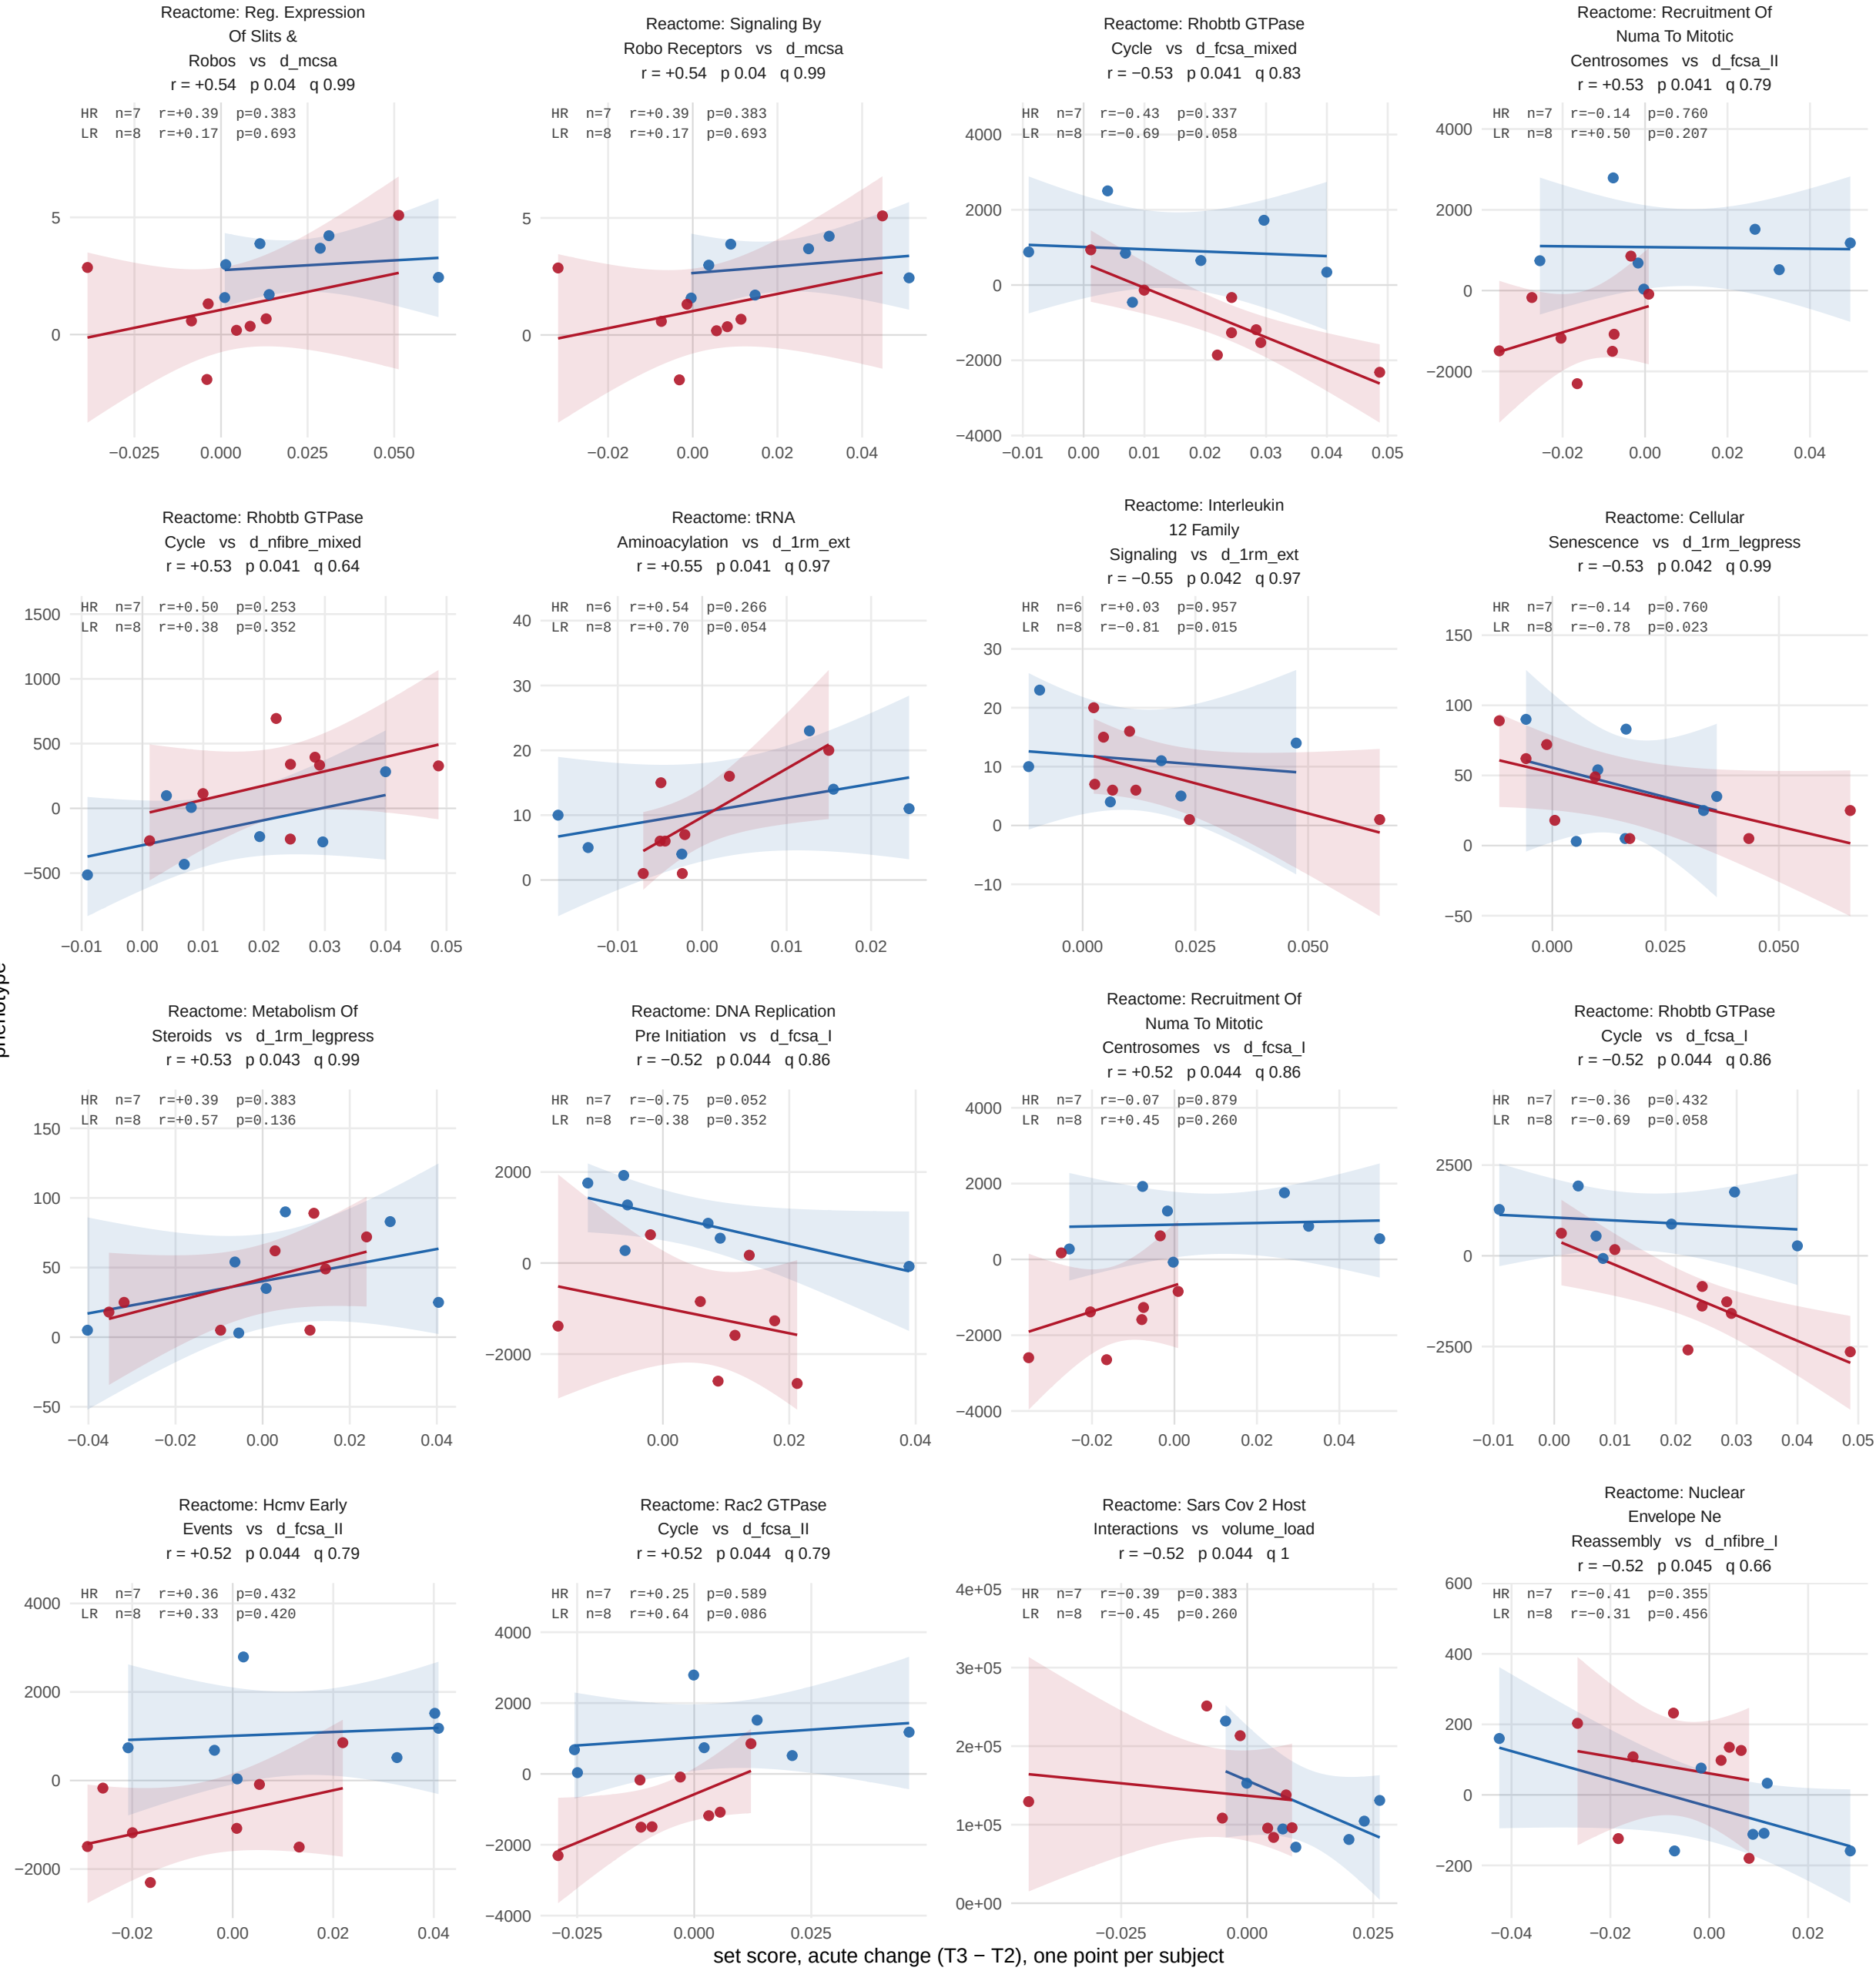


All 511 set-outcome pairs reaching nominal p, by collection then p. Lines are fitted within each arm; the header r is the pooled correlation, q from BH within collection, window and outcome. Nominal p, uncorrected. Each collection is read against its own expectation: GOBP 44.9 of 897, GO_Slim 2.9 of 58, Hallmark 1.7 of 33, KEGG_Legacy 3.1 of 62, Reactome 16.4 of 328.

Set score against phenotype, acute change (T3 – T2)

Spearman, subjects pooled across arms

HR LR

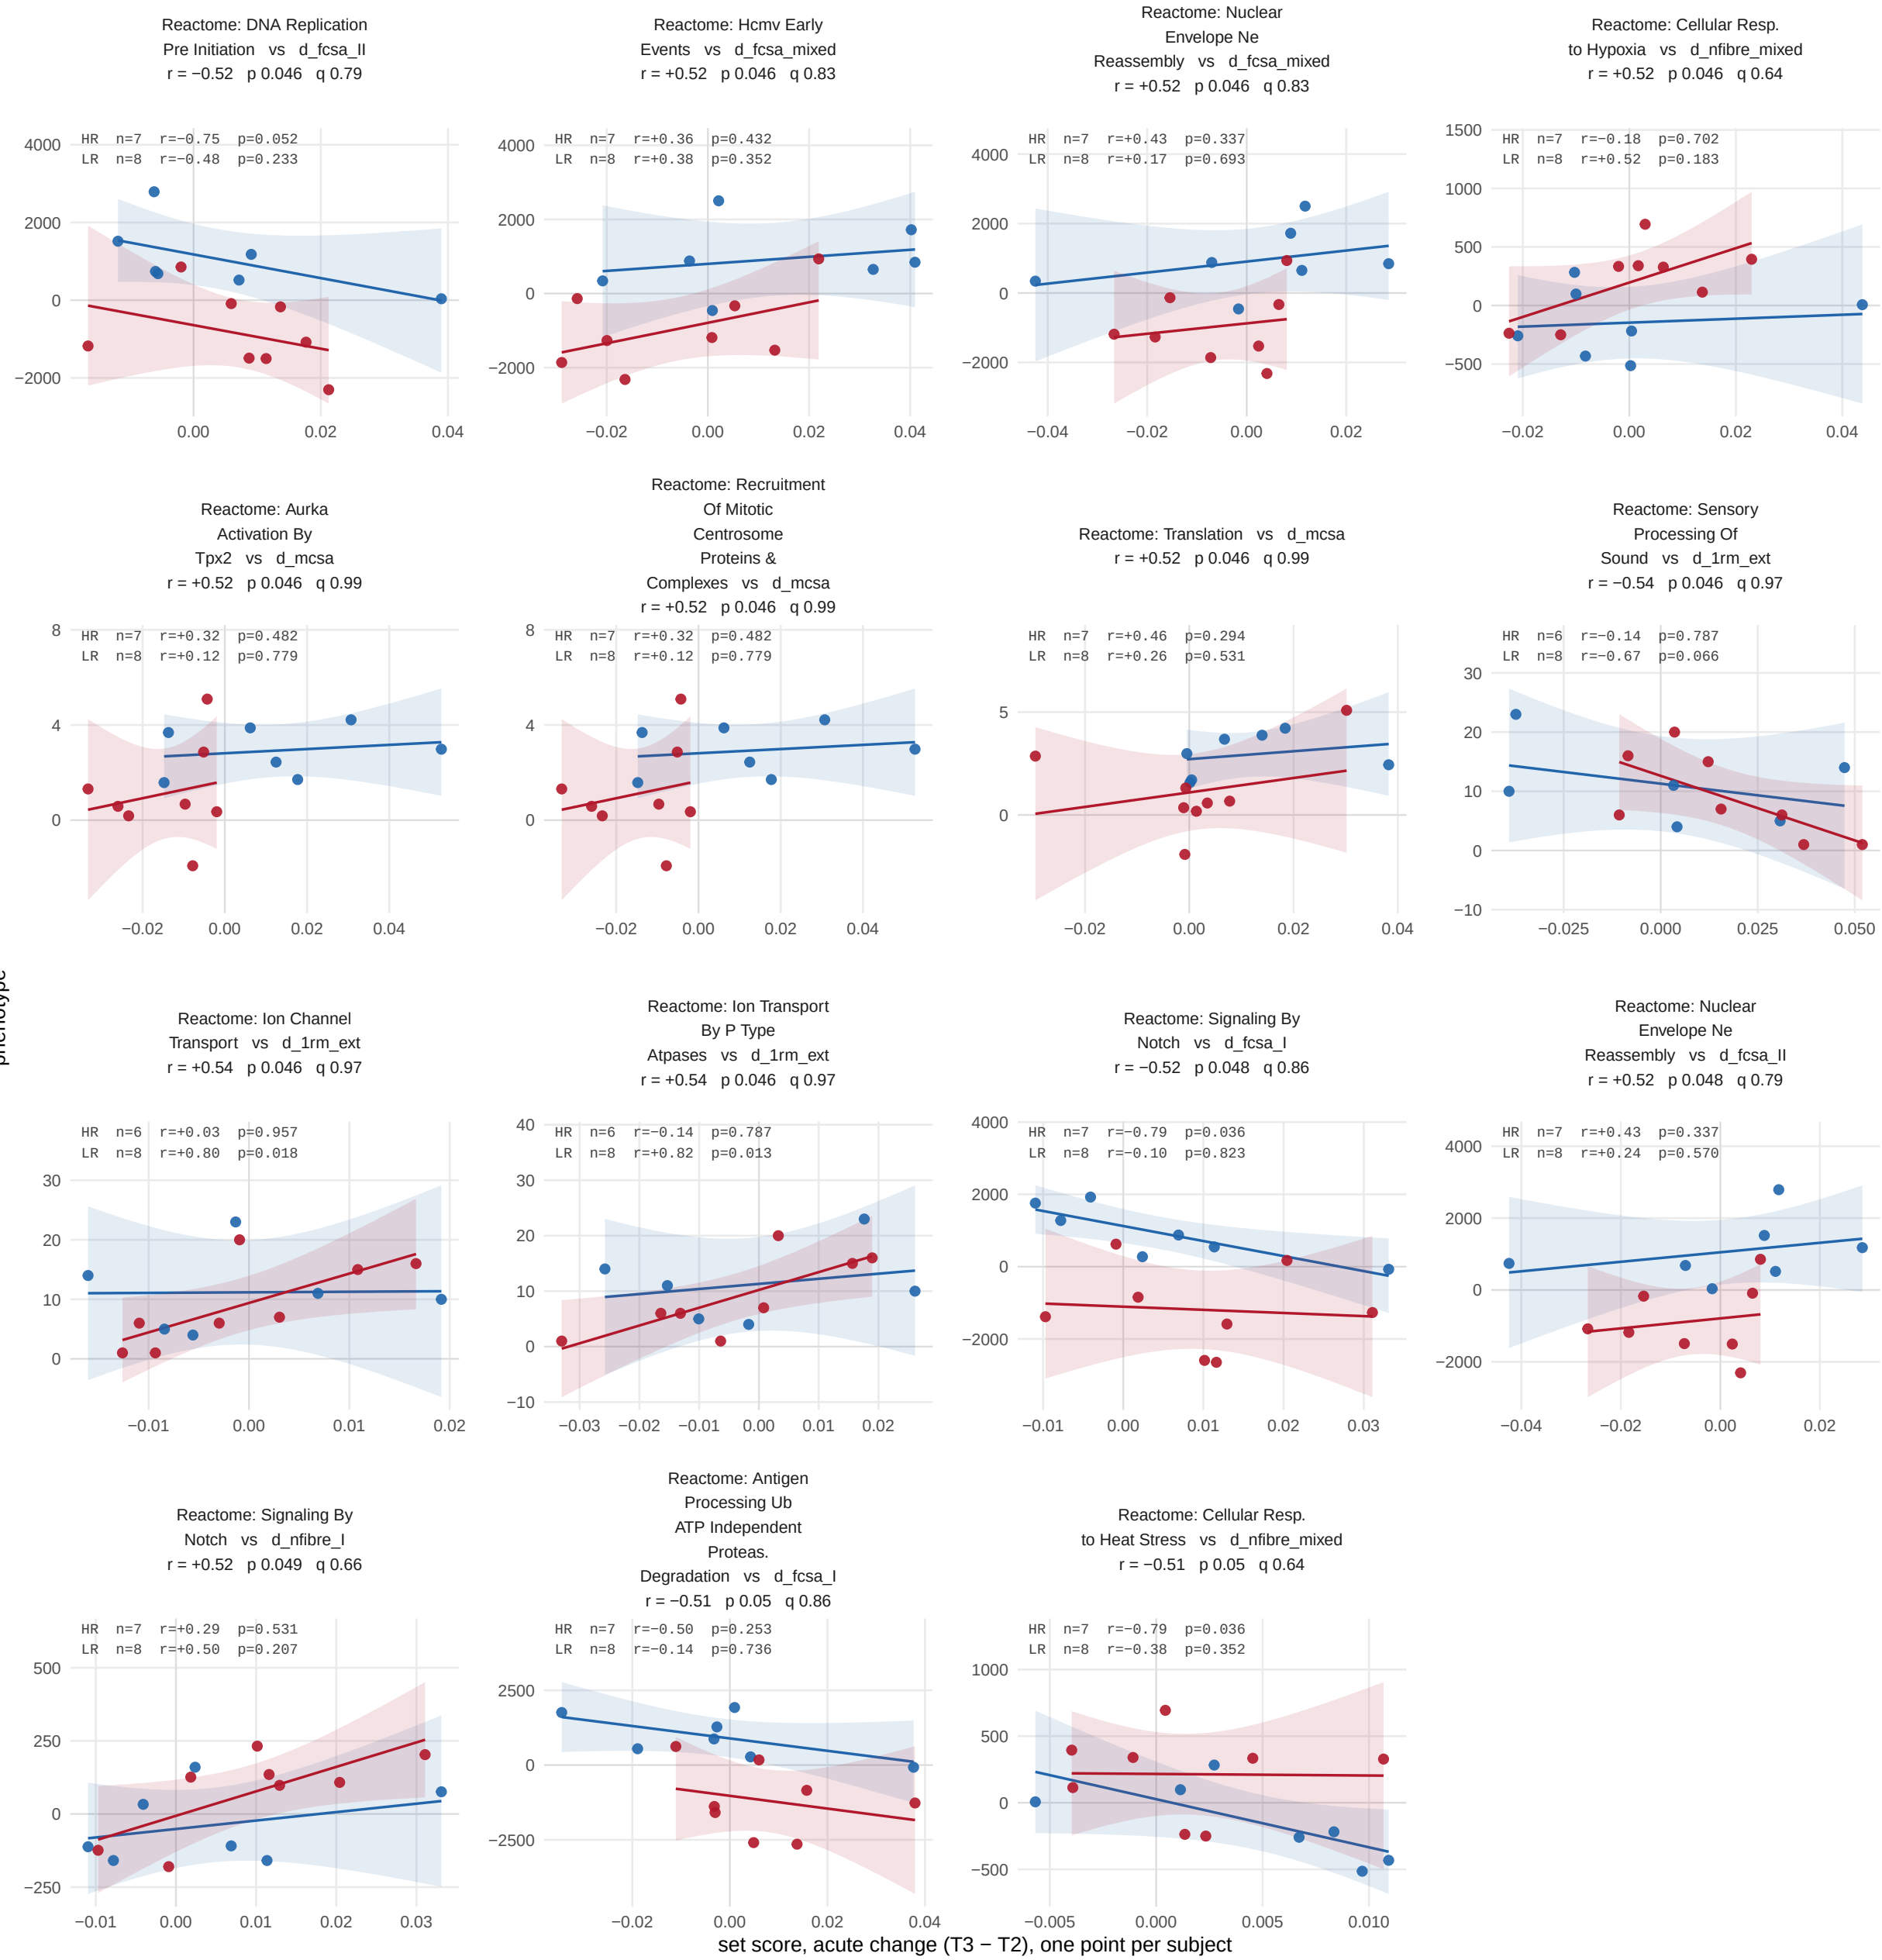

All 511 set-outcome pairs reaching nominal p, by collection then p. Lines are fitted within each arm; the header r is the pooled correlation, q from BH within collection, window and outcome. Nominal p, uncorrected. Each collection is read against its own expectation: GOBP 44.9 of 897, GO_Slim 2.9 of 58, Hallmark 1.7 of 33, KEGG_Legacy 3.1 of 62, Reactome 16.4 of 328.