Discrimination overview: modules

All 15 modules, one row each. Rows follow module size. Grey: not tested. Table: c_data/module_classification.xlsx, auc.

C1 vs C2 at T1

2 of 15 modules at p < 0.05, 0 at BH < 0.05. Page 1 of 1.

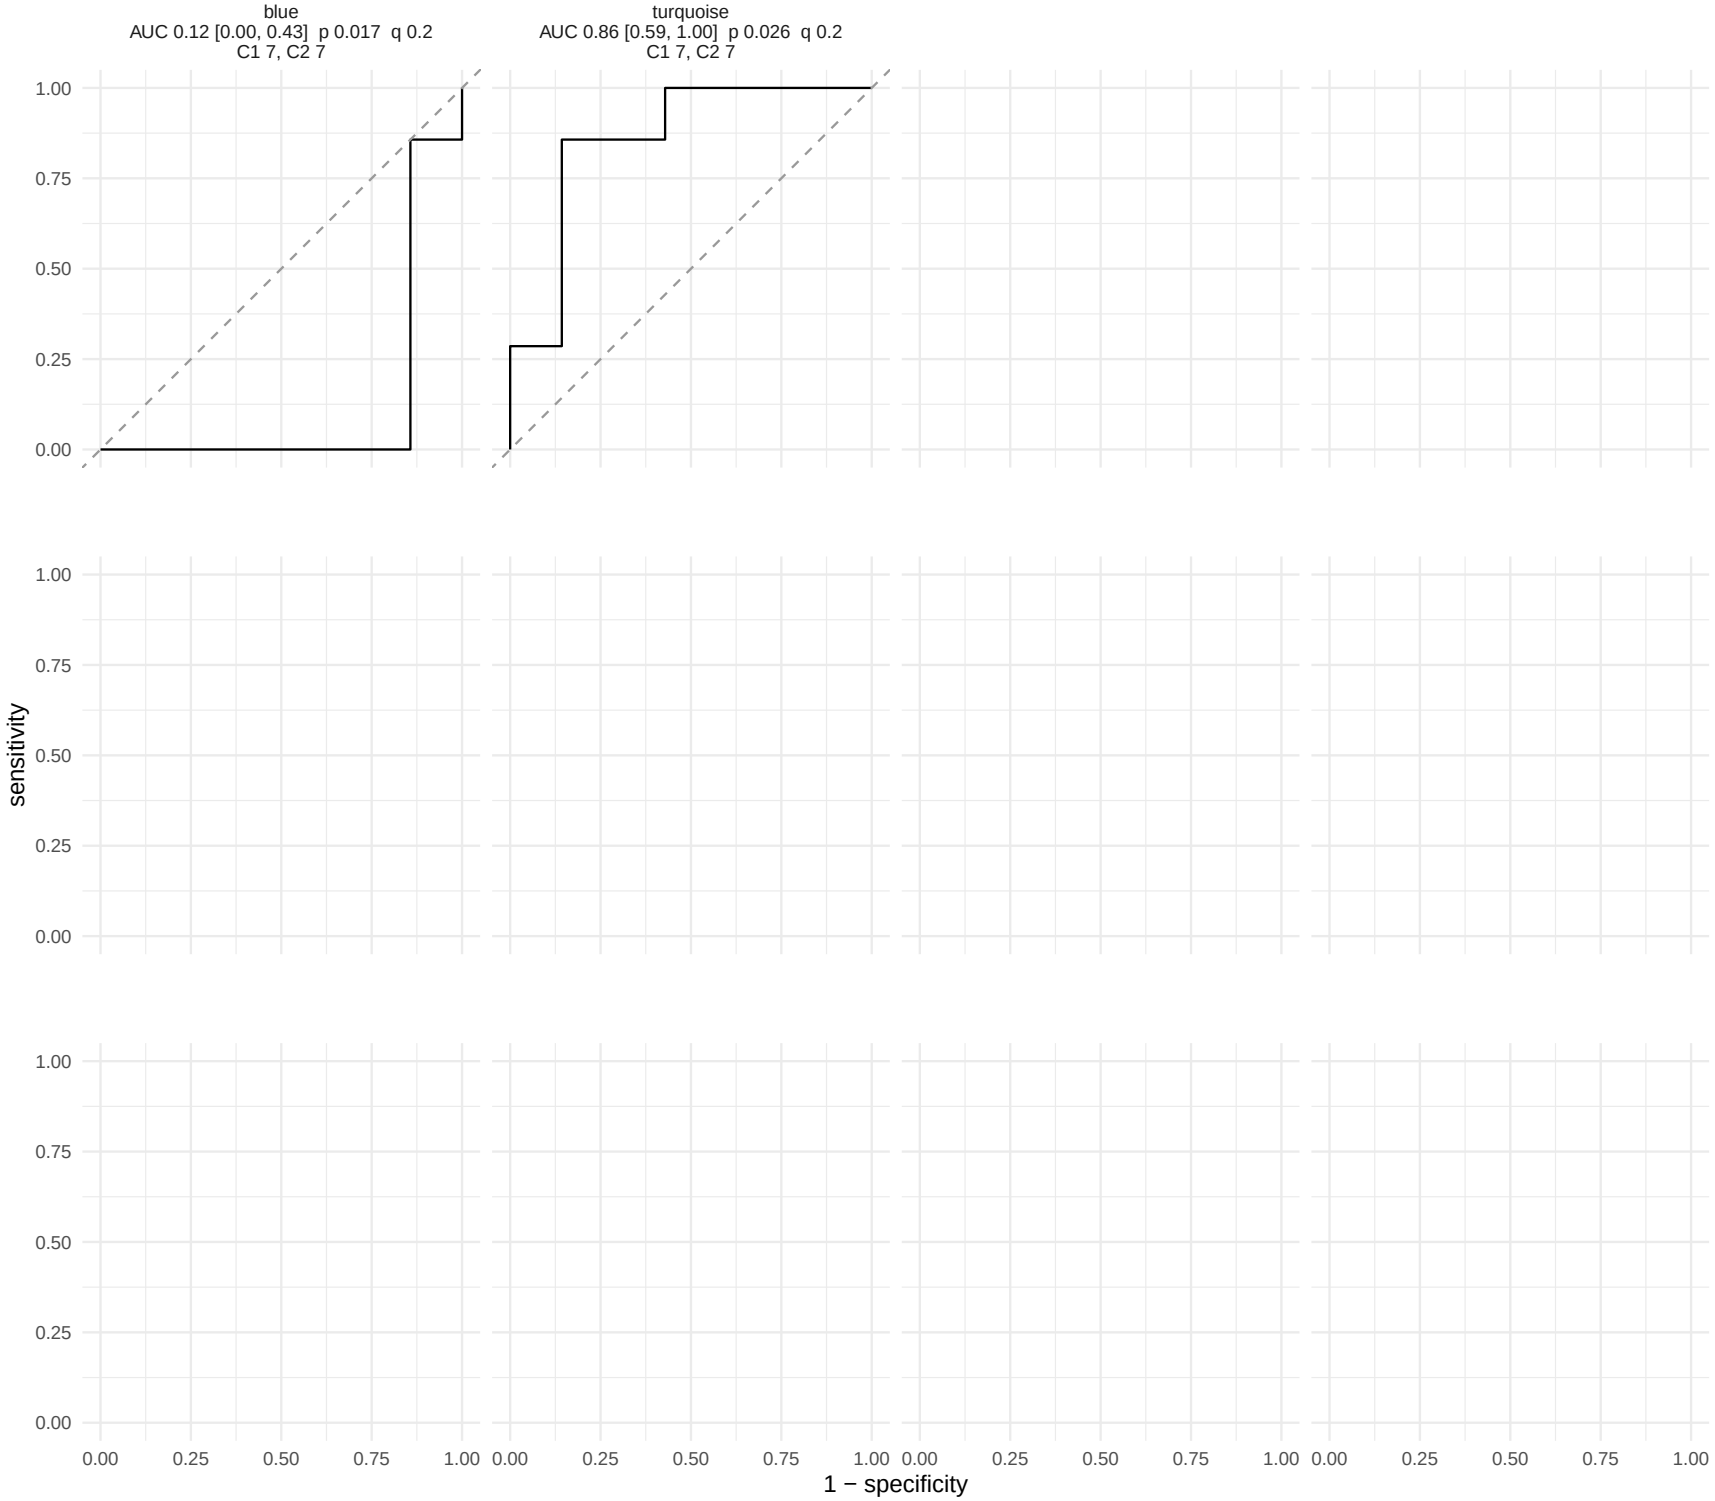

C1 (up to 7) against C2 (up to 7); AUC above 0.5 means higher in C1. Header: AUC with its stratified bootstrap 95% interval (2000 resamples), Wilcoxon rank−sum p (smallest attainable 0.00058), BH q within task, and the f

C1 vs C2 at T2

3 of 15 modules at p < 0.05, 0 at BH < 0.05. Page 1 of 1.

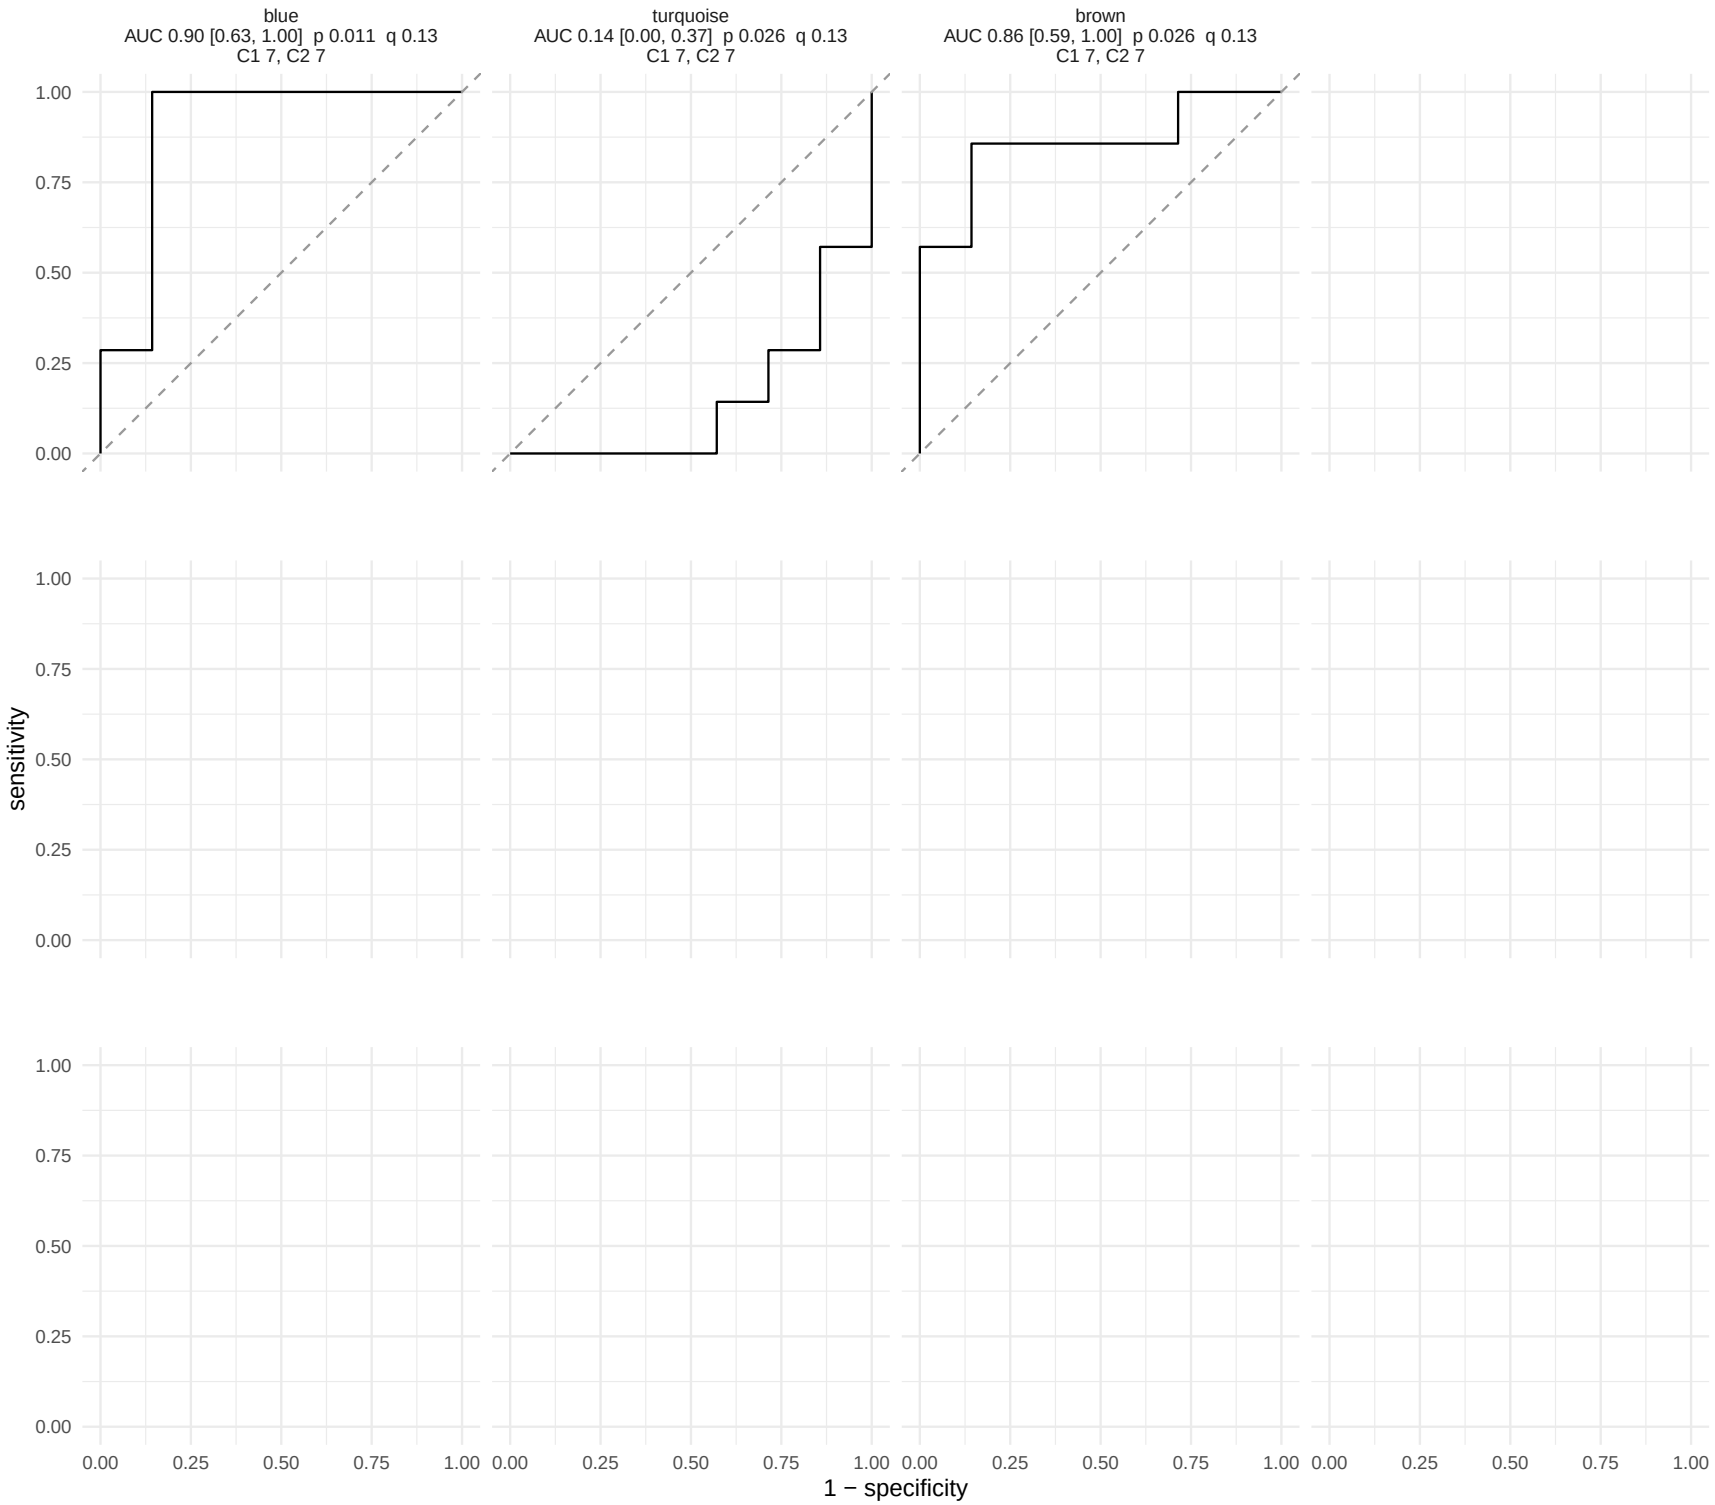

C1 (up to 7) against C2 (up to 7); AUC above 0.5 means higher in C1. Header: AUC with its stratified bootstrap 95% interval (2000 resamples), Wilcoxon rank−sum p (smallest attainable 0.00058), BH q within task, and the f

C1 vs C2, training change

6 of 15 modules at p < 0.05, 3 at BH < 0.05. Page 1 of 1.

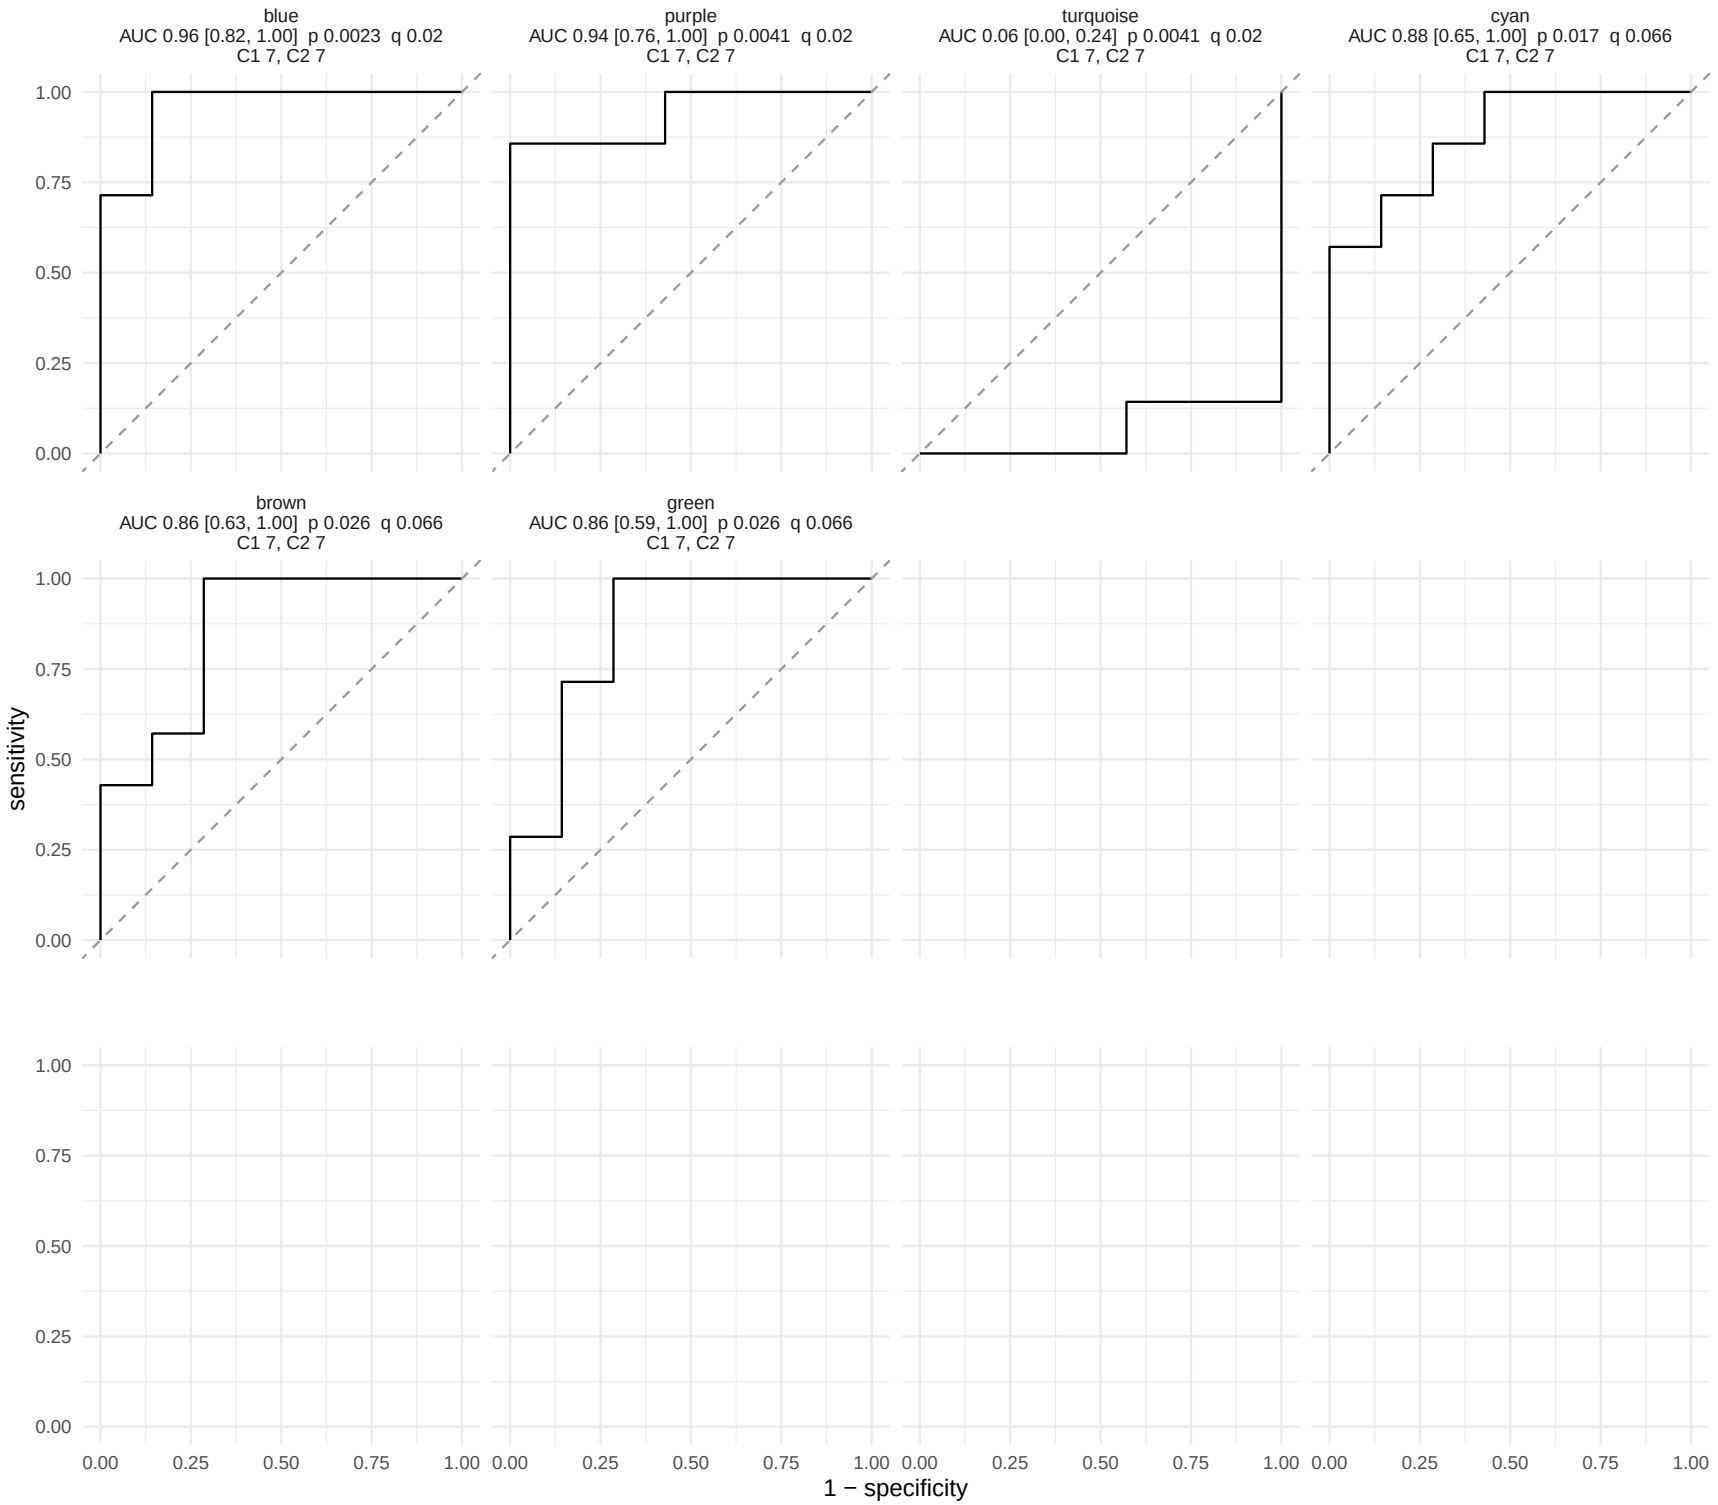

C1 (up to 7) against C2 (up to 7); AUC above 0.5 means higher in C1. Header: AUC with its stratified bootstrap 95% interval (2000 resamples), Wilcoxon rank−sum p (smallest attainable 0.00058), BH q within task, and the f

C1 vs C2, acute change

2 of 15 modules at p < 0.05, 0 at BH < 0.05. Page 1 of 1.

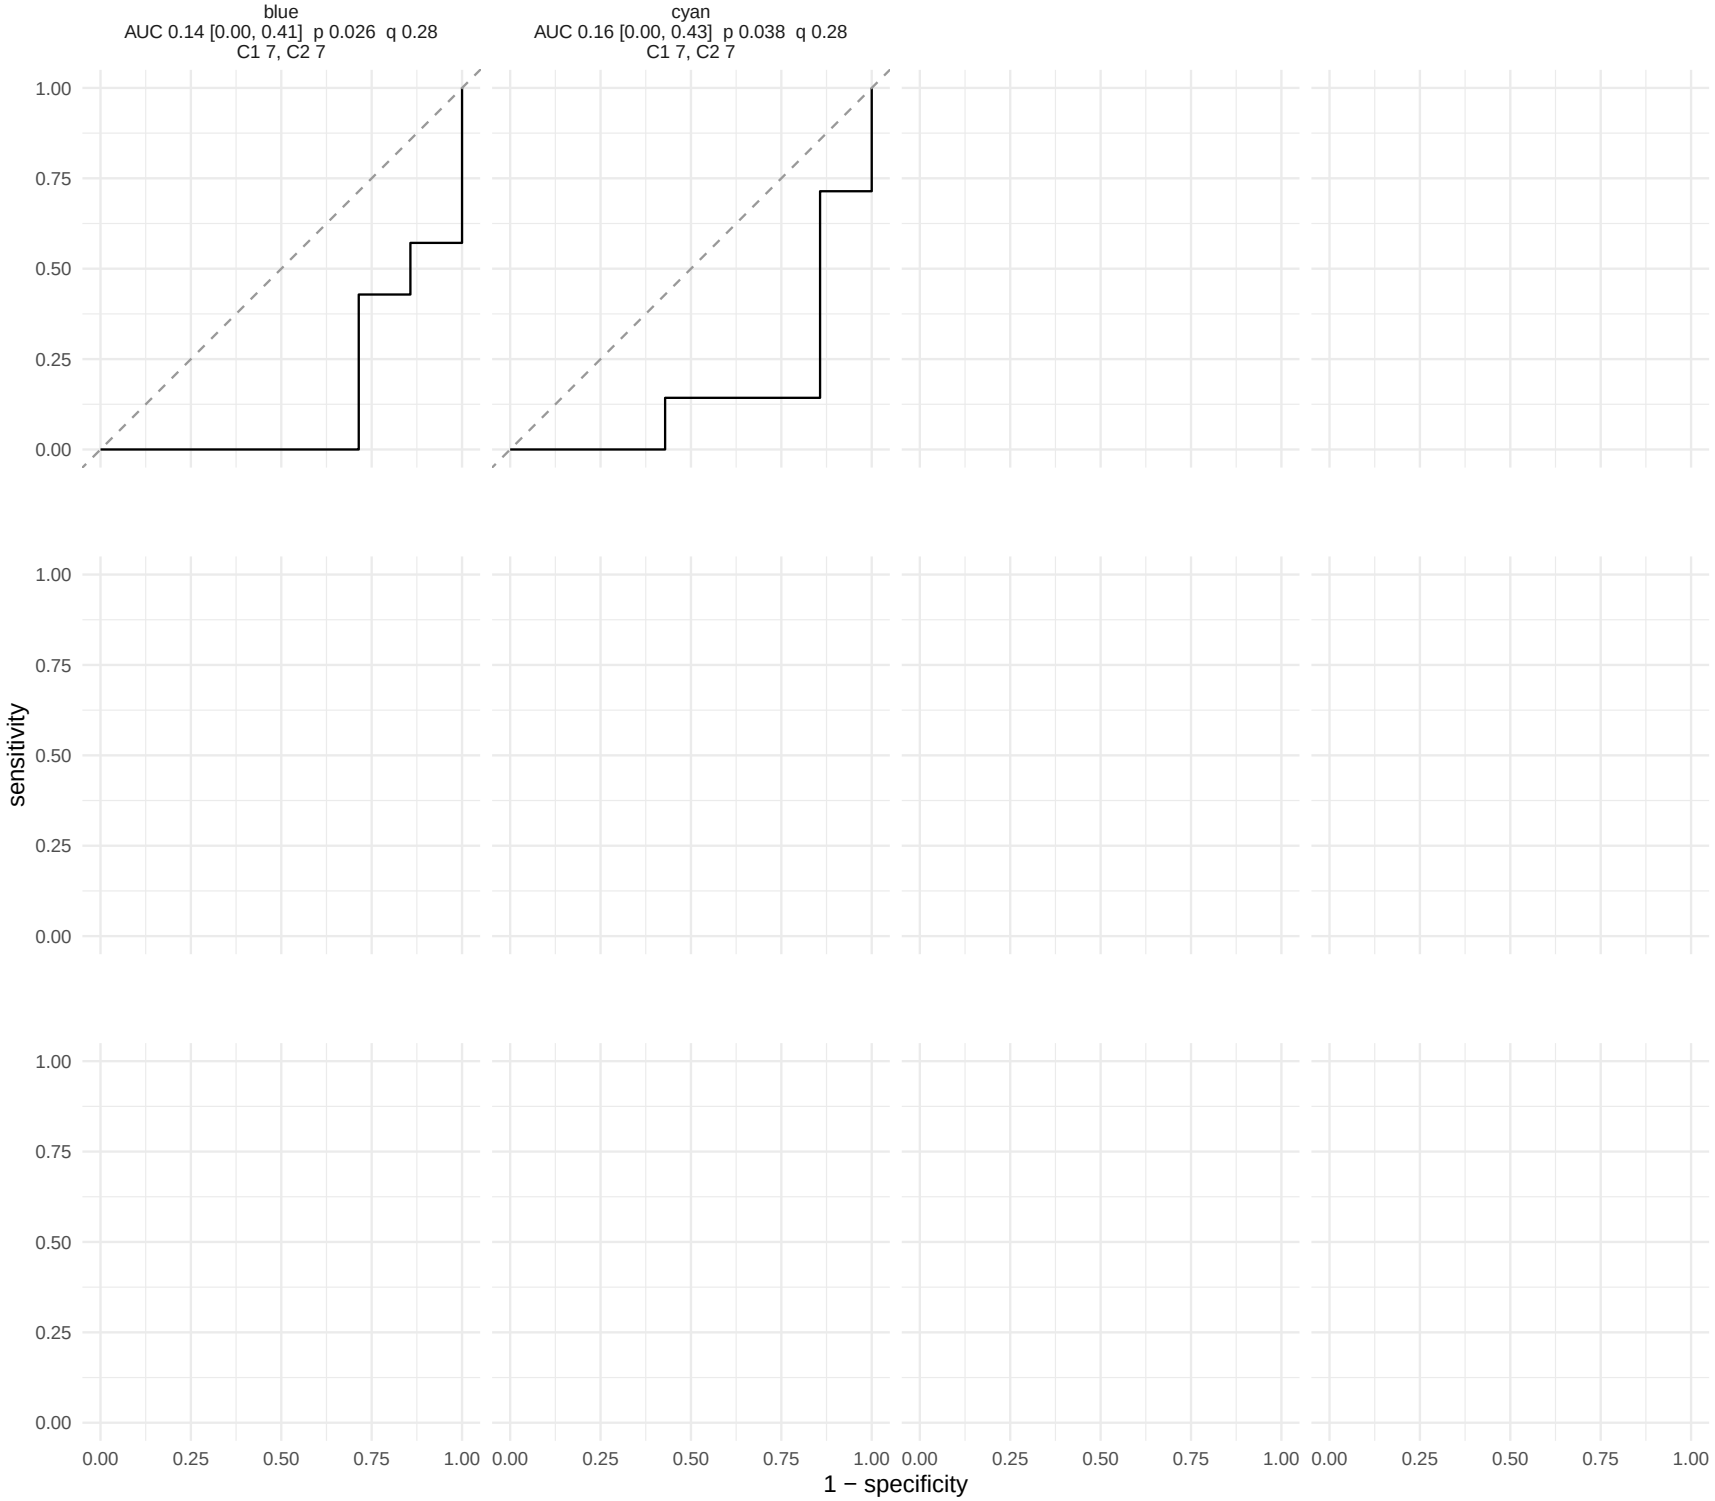

C1 (up to 7) against C2 (up to 7); AUC above 0.5 means higher in C1. Header: AUC with its stratified bootstrap 95% interval (2000 resamples), Wilcoxon rank−sum p (smallest attainable 0.00058), BH q within task, and the fo