


Set score against phenotype, training change (T2 – T1)

Spearman, subjects pooled across arms

HR LR

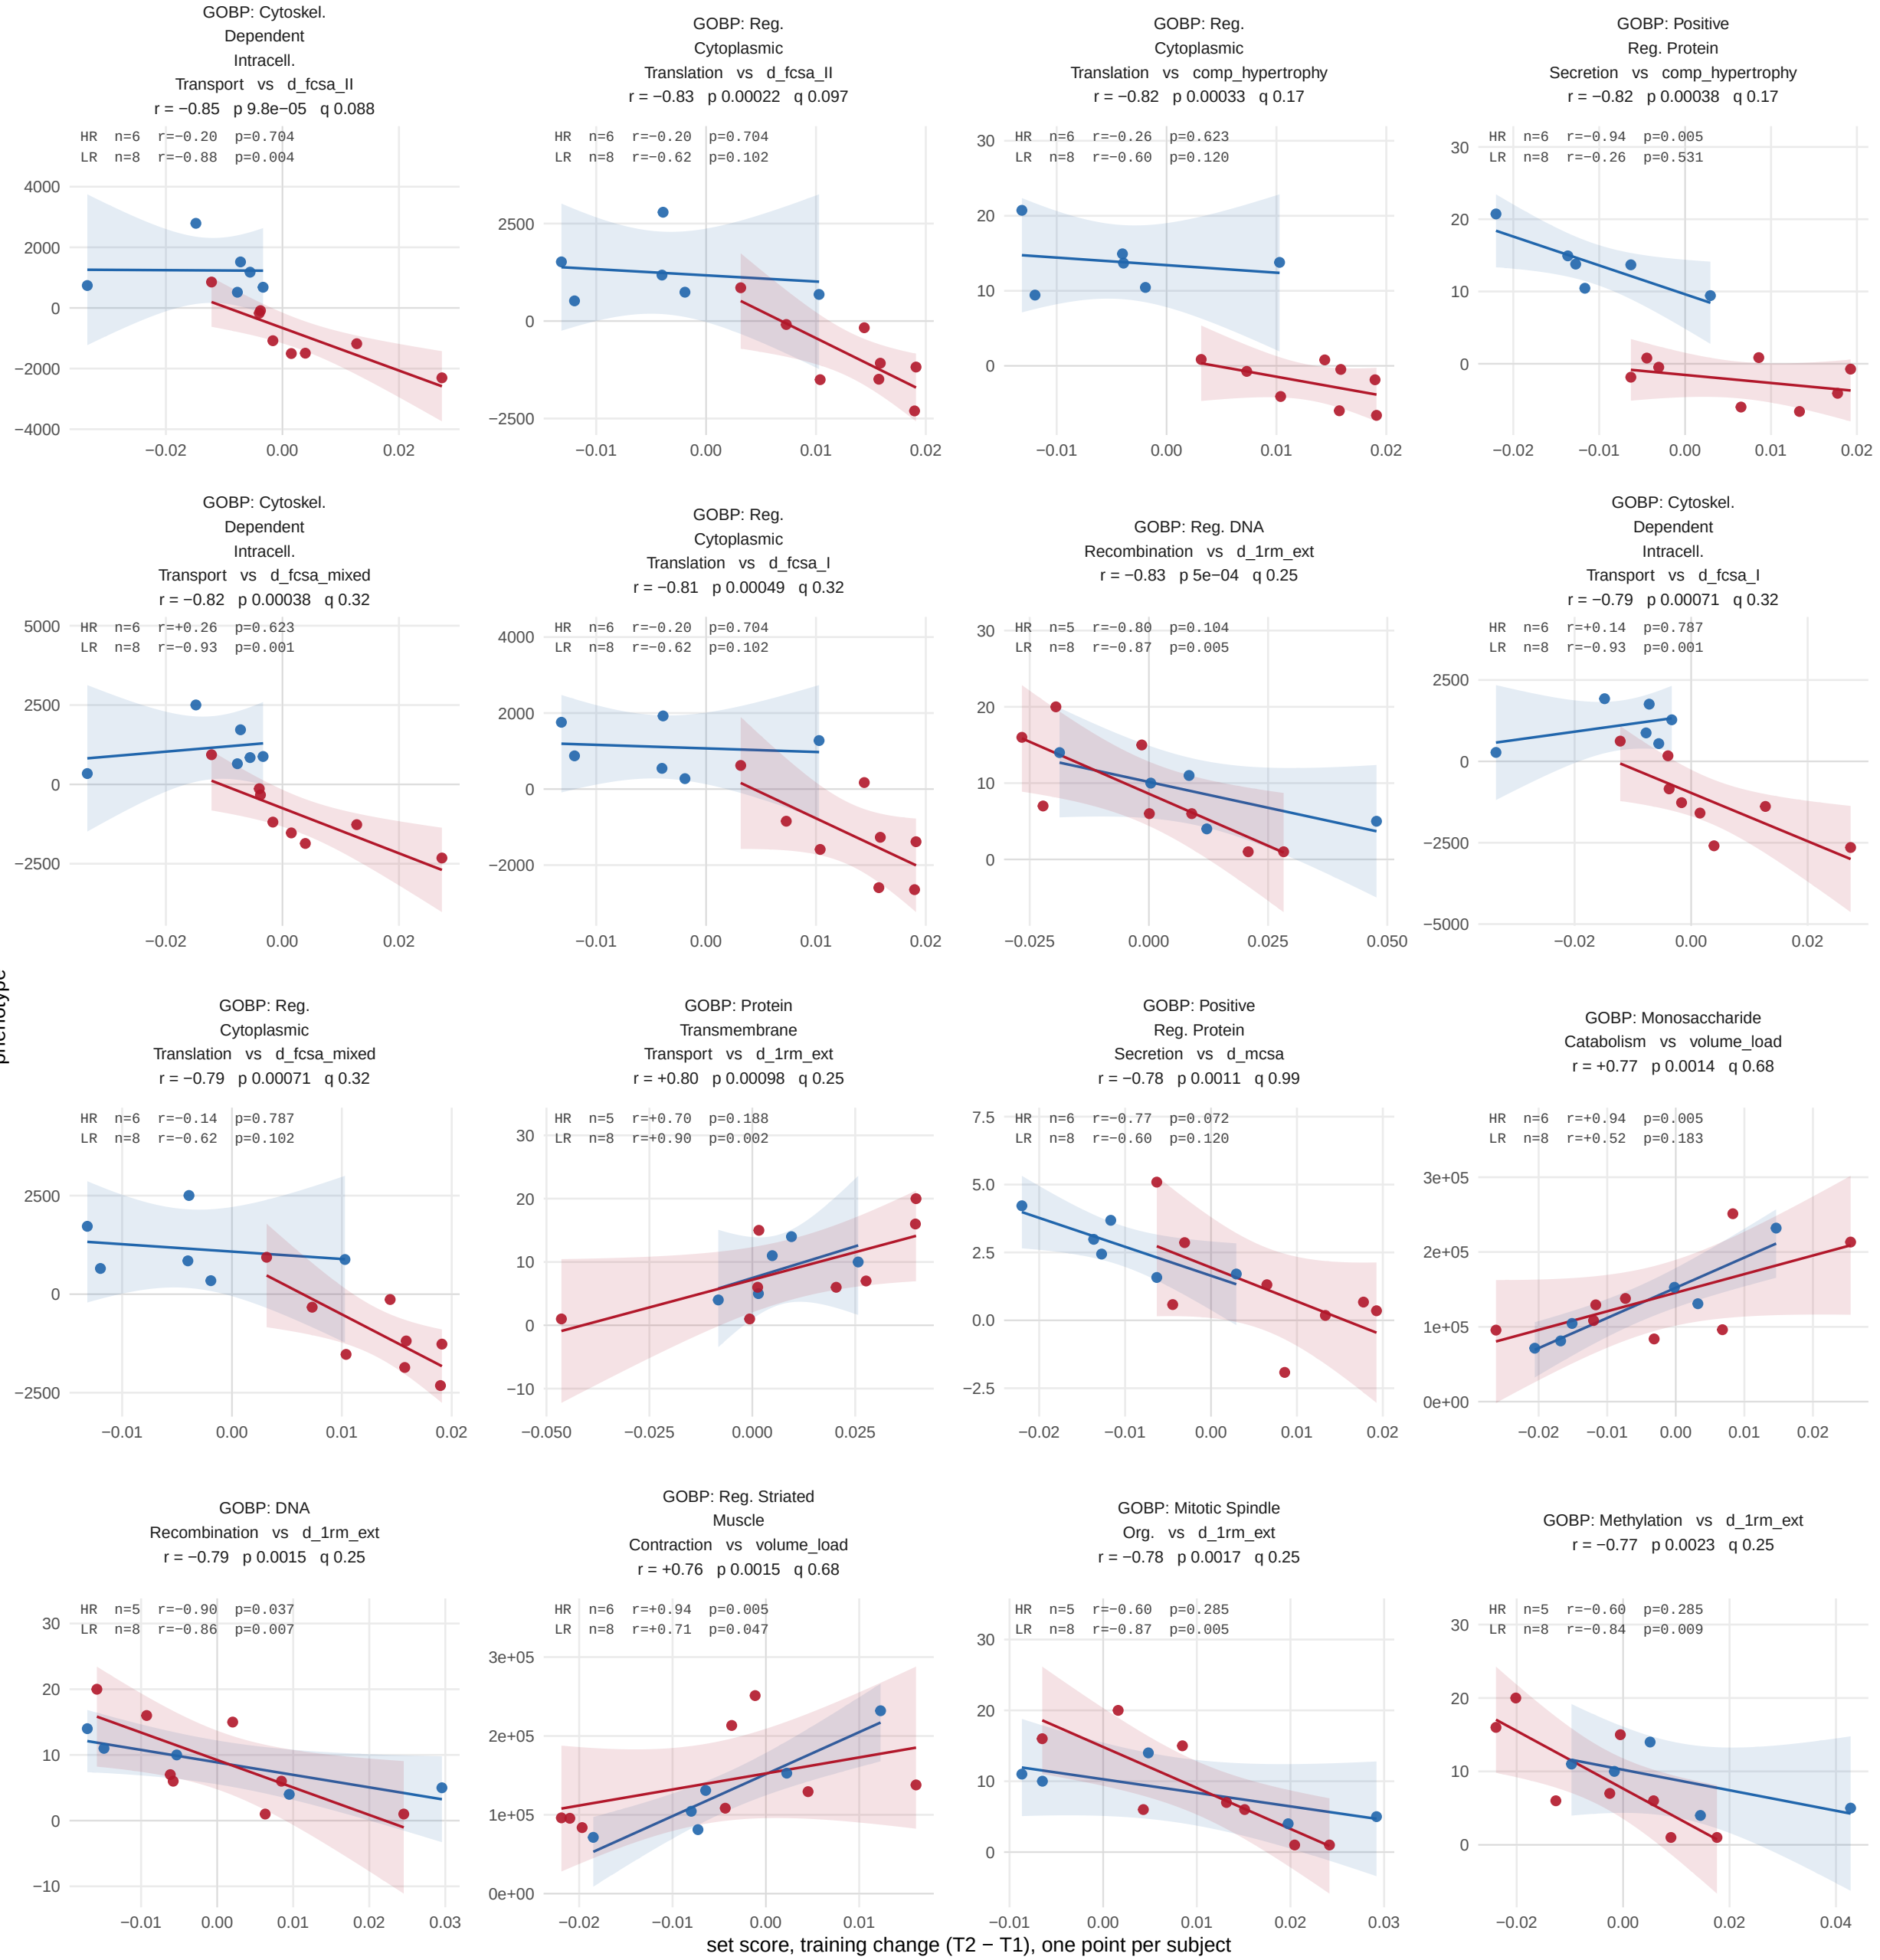


All 518 set-outcome pairs reaching nominal p, by collection then p. Lines are fitted within each arm; the header r is the pooled correlation, q from BH within collection, window and outcome. Nominal p, uncorrected. Each collection is read against its own expectation: GOBP 44.9 of 897, GO_Slim 2.9 of 58, Hallmark 1.7 of 33, KEGG_Legacy 3.1 of 62, Reactome 16.4 of 328.

Set score against phenotype, training change (T2 – T1)

Spearman, subjects pooled across arms

HR LR

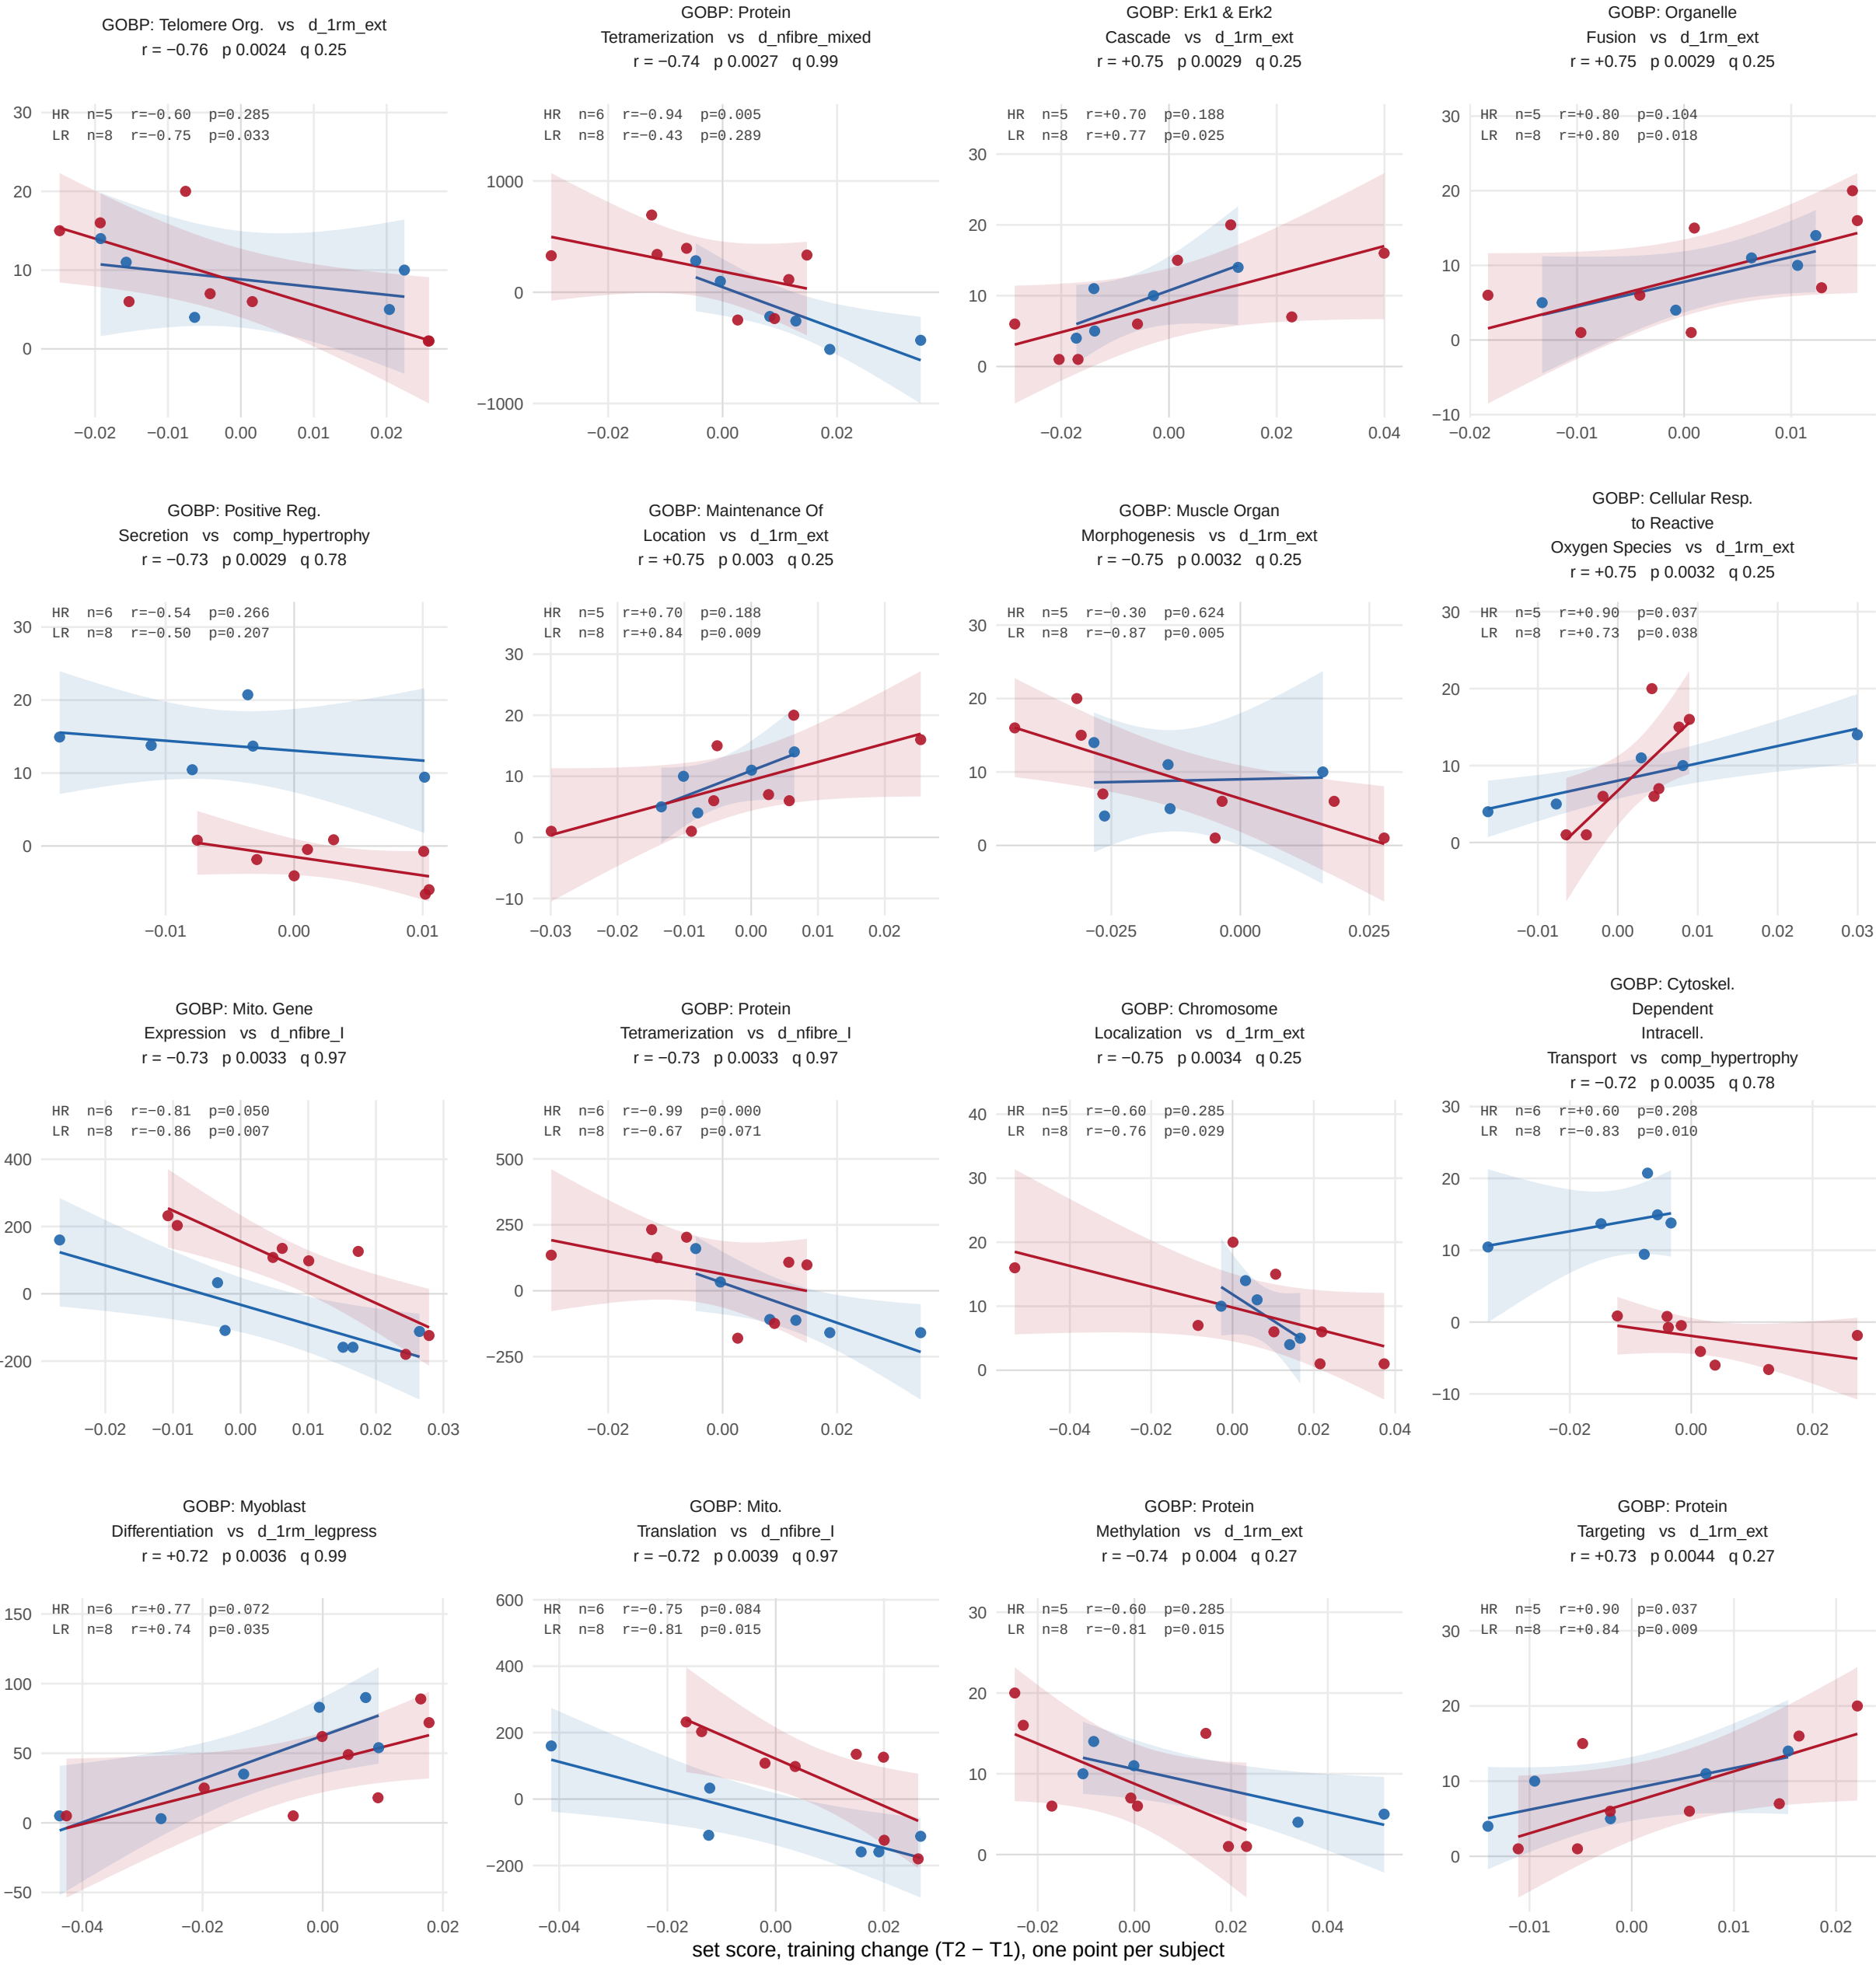


All 518 set–outcome pairs reaching nominal p, by collection then p. Lines are fitted within each arm; the header r is the pooled correlation, q from BH within collection, window and outcome. Nominal p, uncorrected. Each collection is read against its own expectation: GOBP 44.9 of 897, GO_Slim 2.9 of 58, Hallmark 1.7 of 33, KEGG_Legacy 3.1 of 62, Reactome 16.4 of 328.

Set score against phenotype, training change (T2 – T1)

Spearman, subjects pooled across arms

HR LR

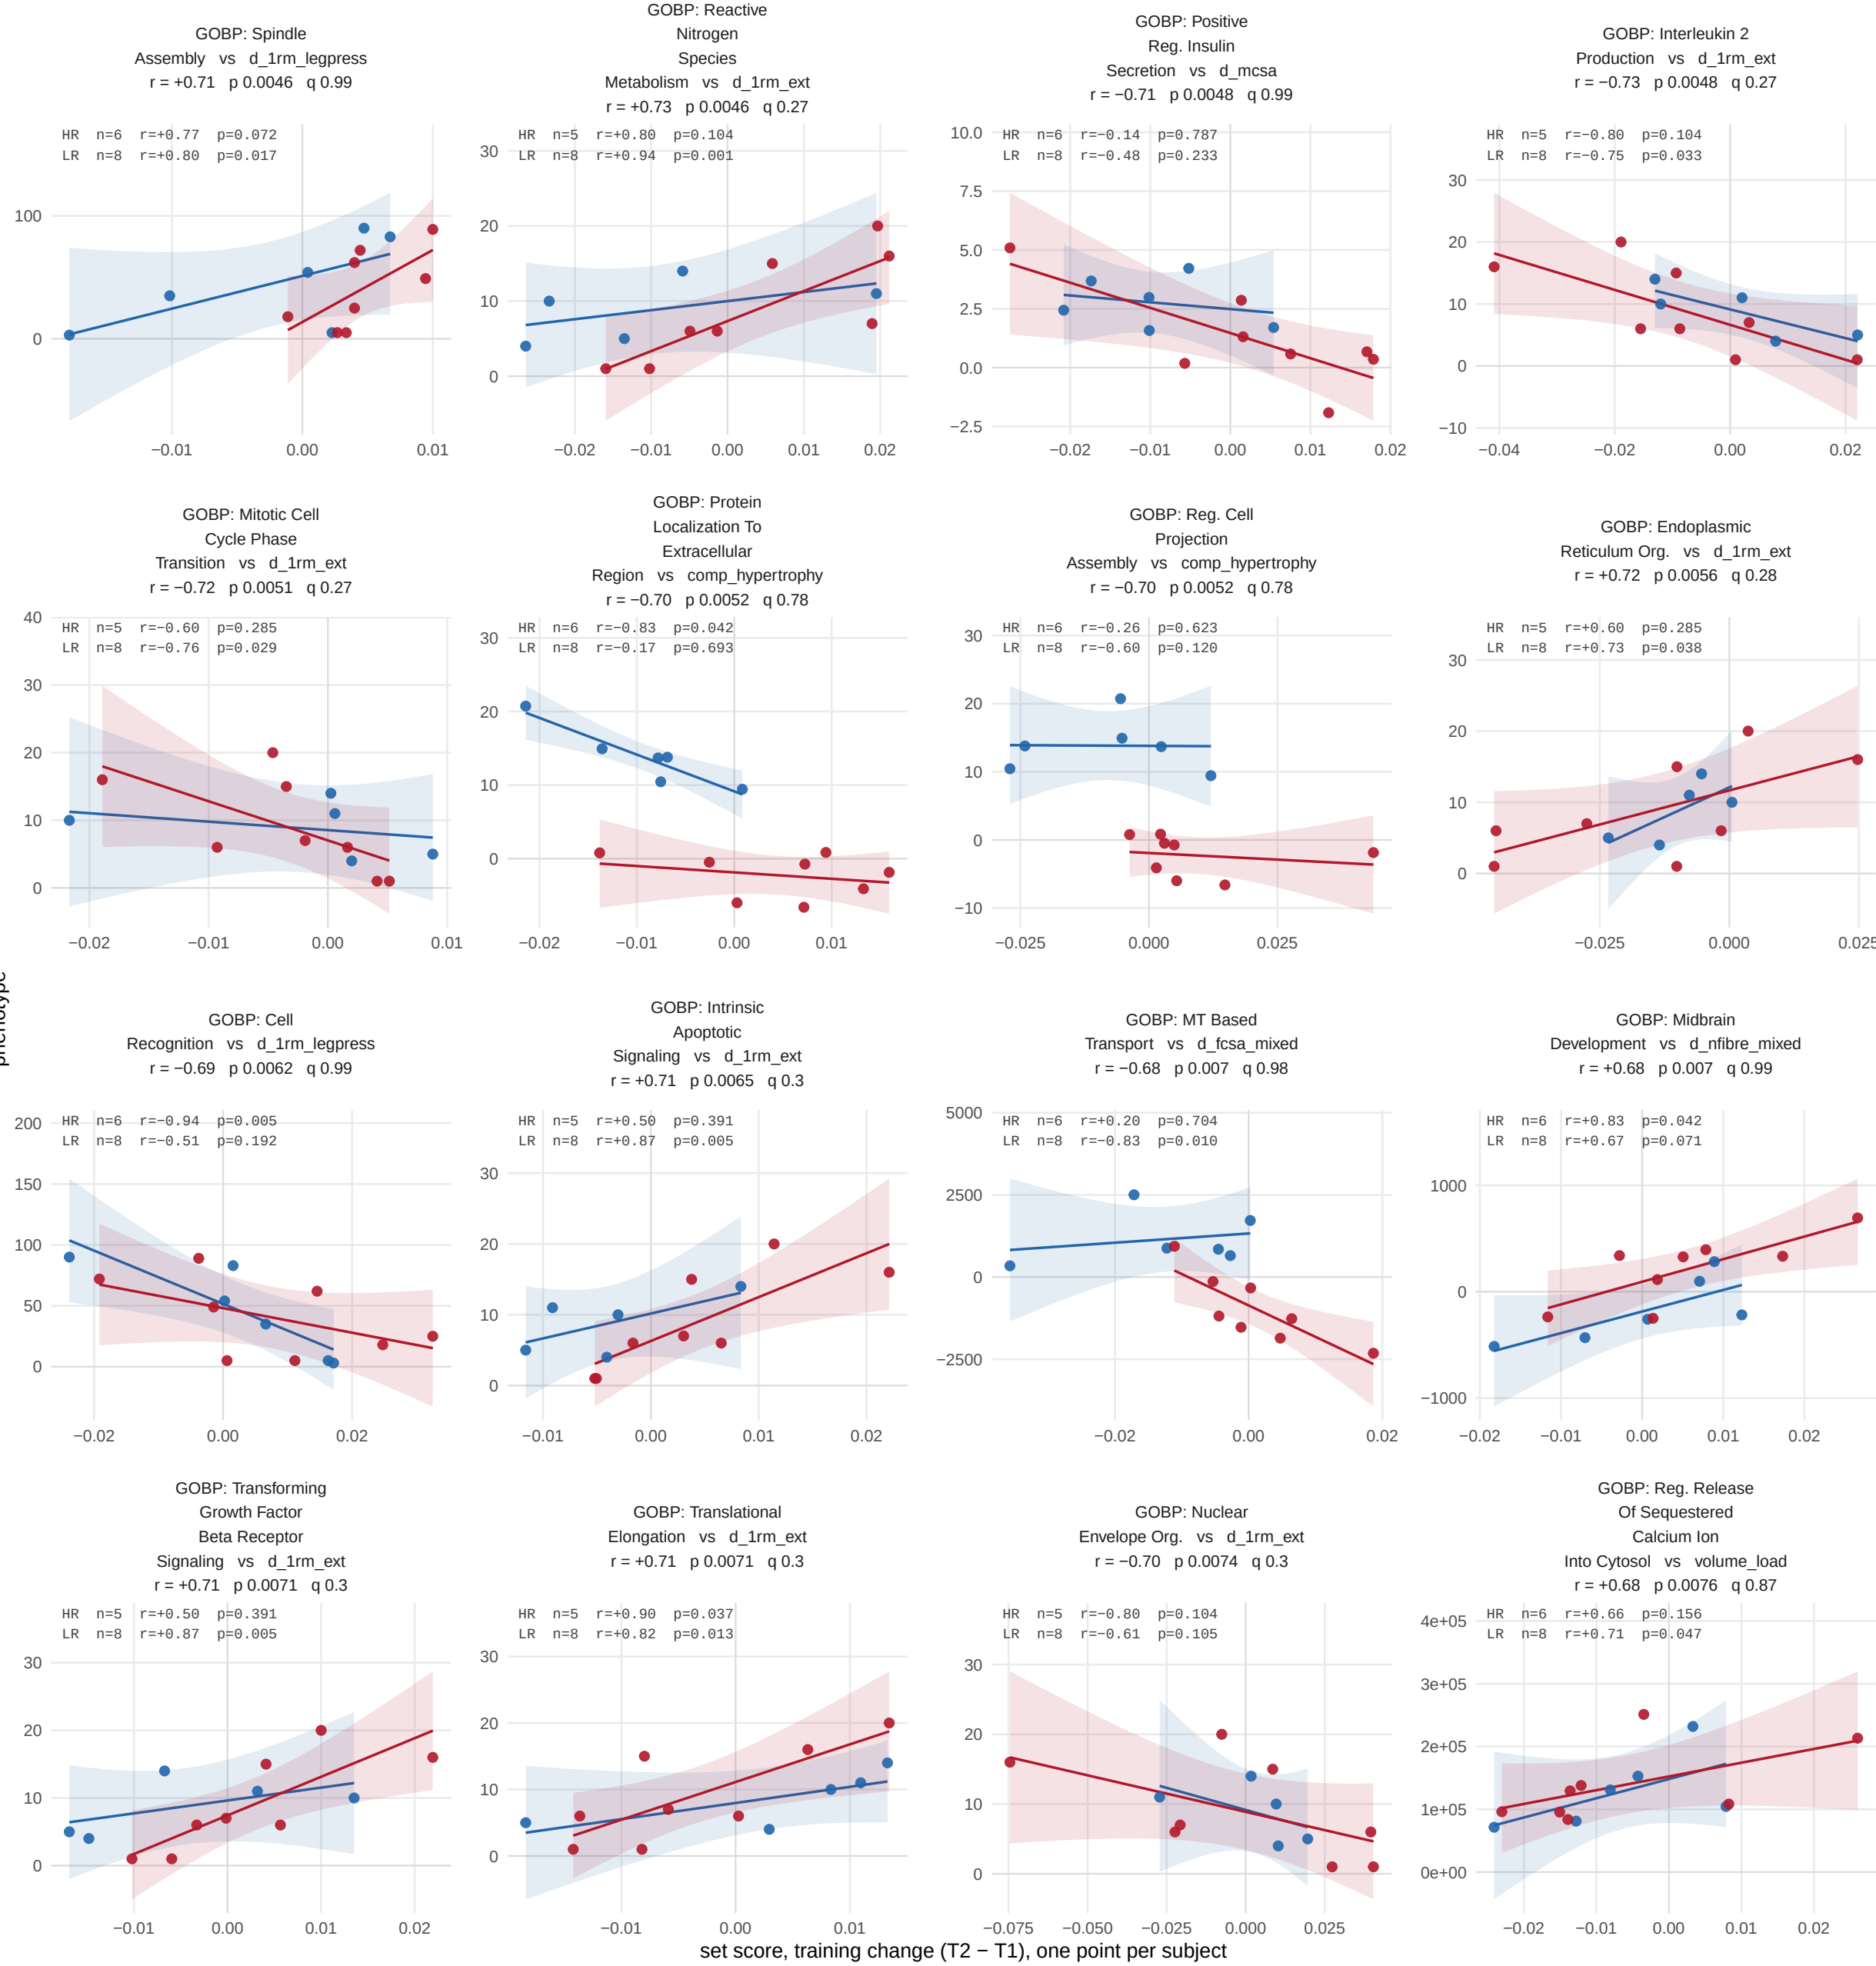


All 518 set-outcome pairs reaching nominal p, by collection then p. Lines are fitted within each arm; the header r is the pooled correlation, q from BH within collection, window and outcome. Nominal p, uncorrected. Each collection is read against its own expectation: GOBP 44.9 of 897, GO_Slim 2.9 of 58, Hallmark 1.7 of 33, KEGG_Legacy 3.1 of 62, Reactome 16.4 of 328.

Set score against phenotype, training change (T2 – T1)

Spearman, subjects pooled across arms

HR LR

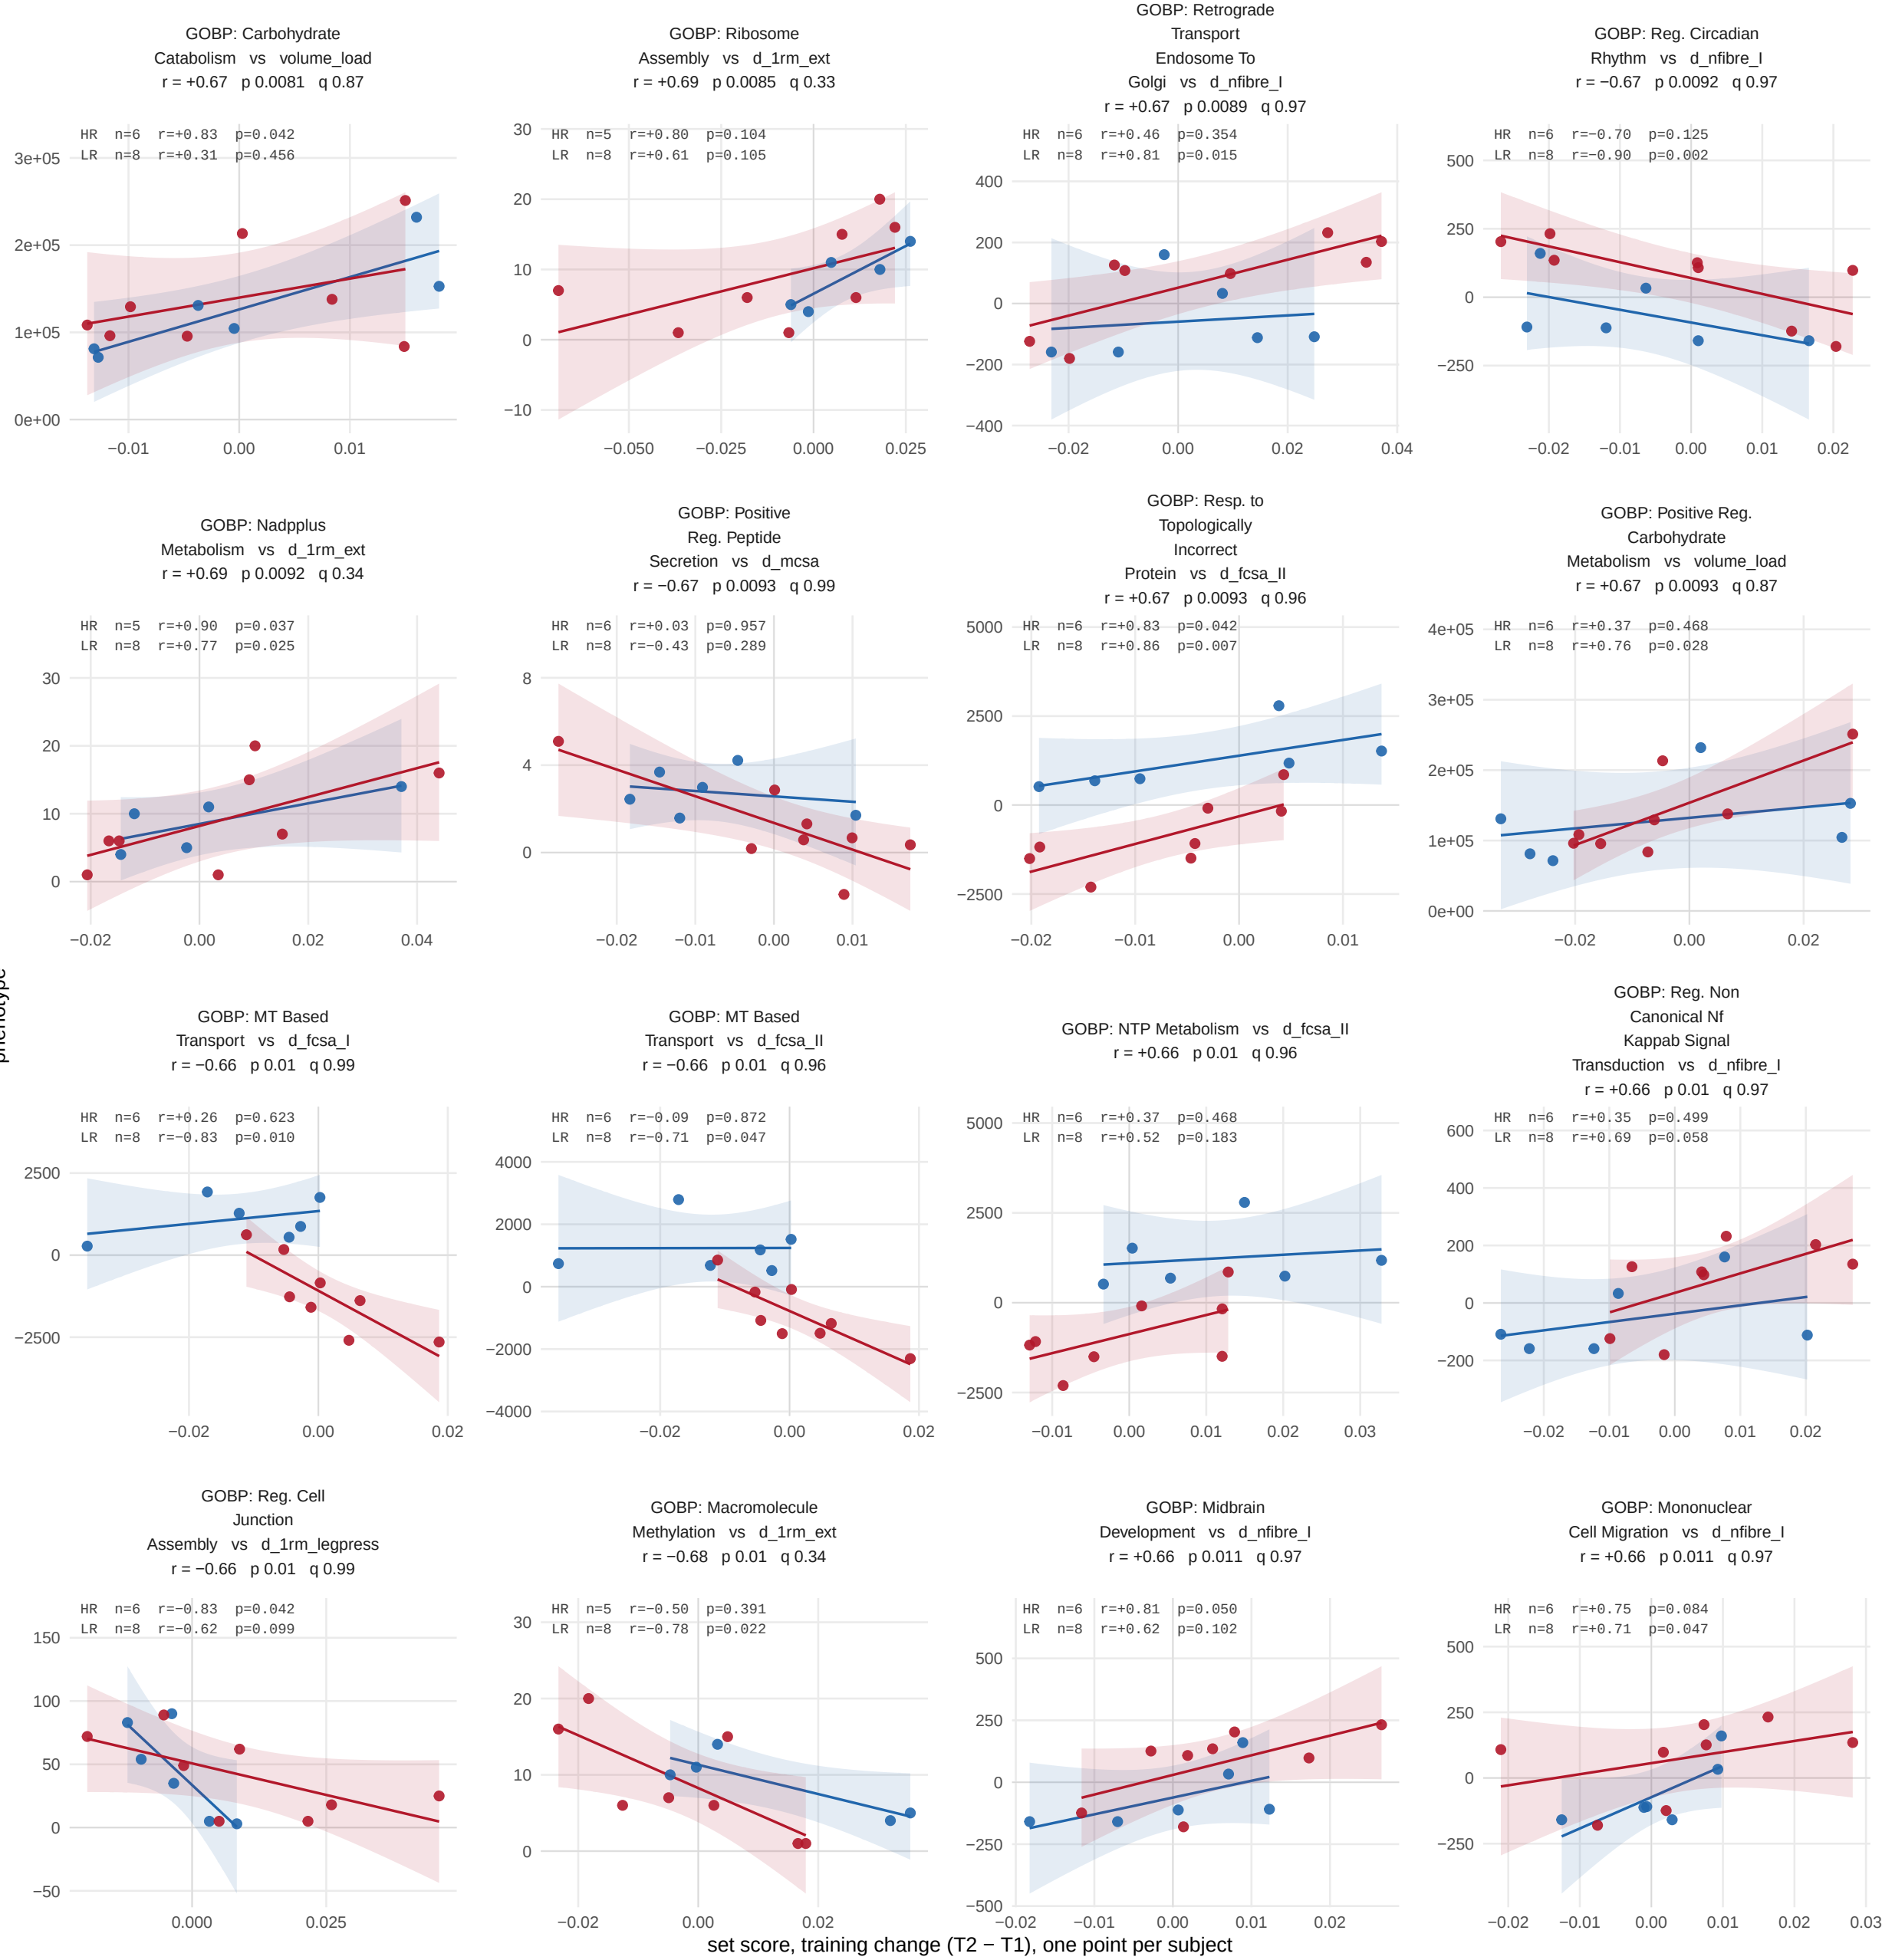


All 518 set-outcome pairs reaching nominal p, by collection then p. Lines are fitted within each arm; the header r is the pooled correlation, q from BH within collection, window and outcome. Nominal p, uncorrected. Each collection is read against its own expectation: GOBP 44.9 of 897, GO_Slim 2.9 of 58, Hallmark 1.7 of 33, KEGG_Legacy 3.1 of 62, Reactome 16.4 of 328.

Set score against phenotype, training change (T2 – T1)

Spearman, subjects pooled across arms


HR LR

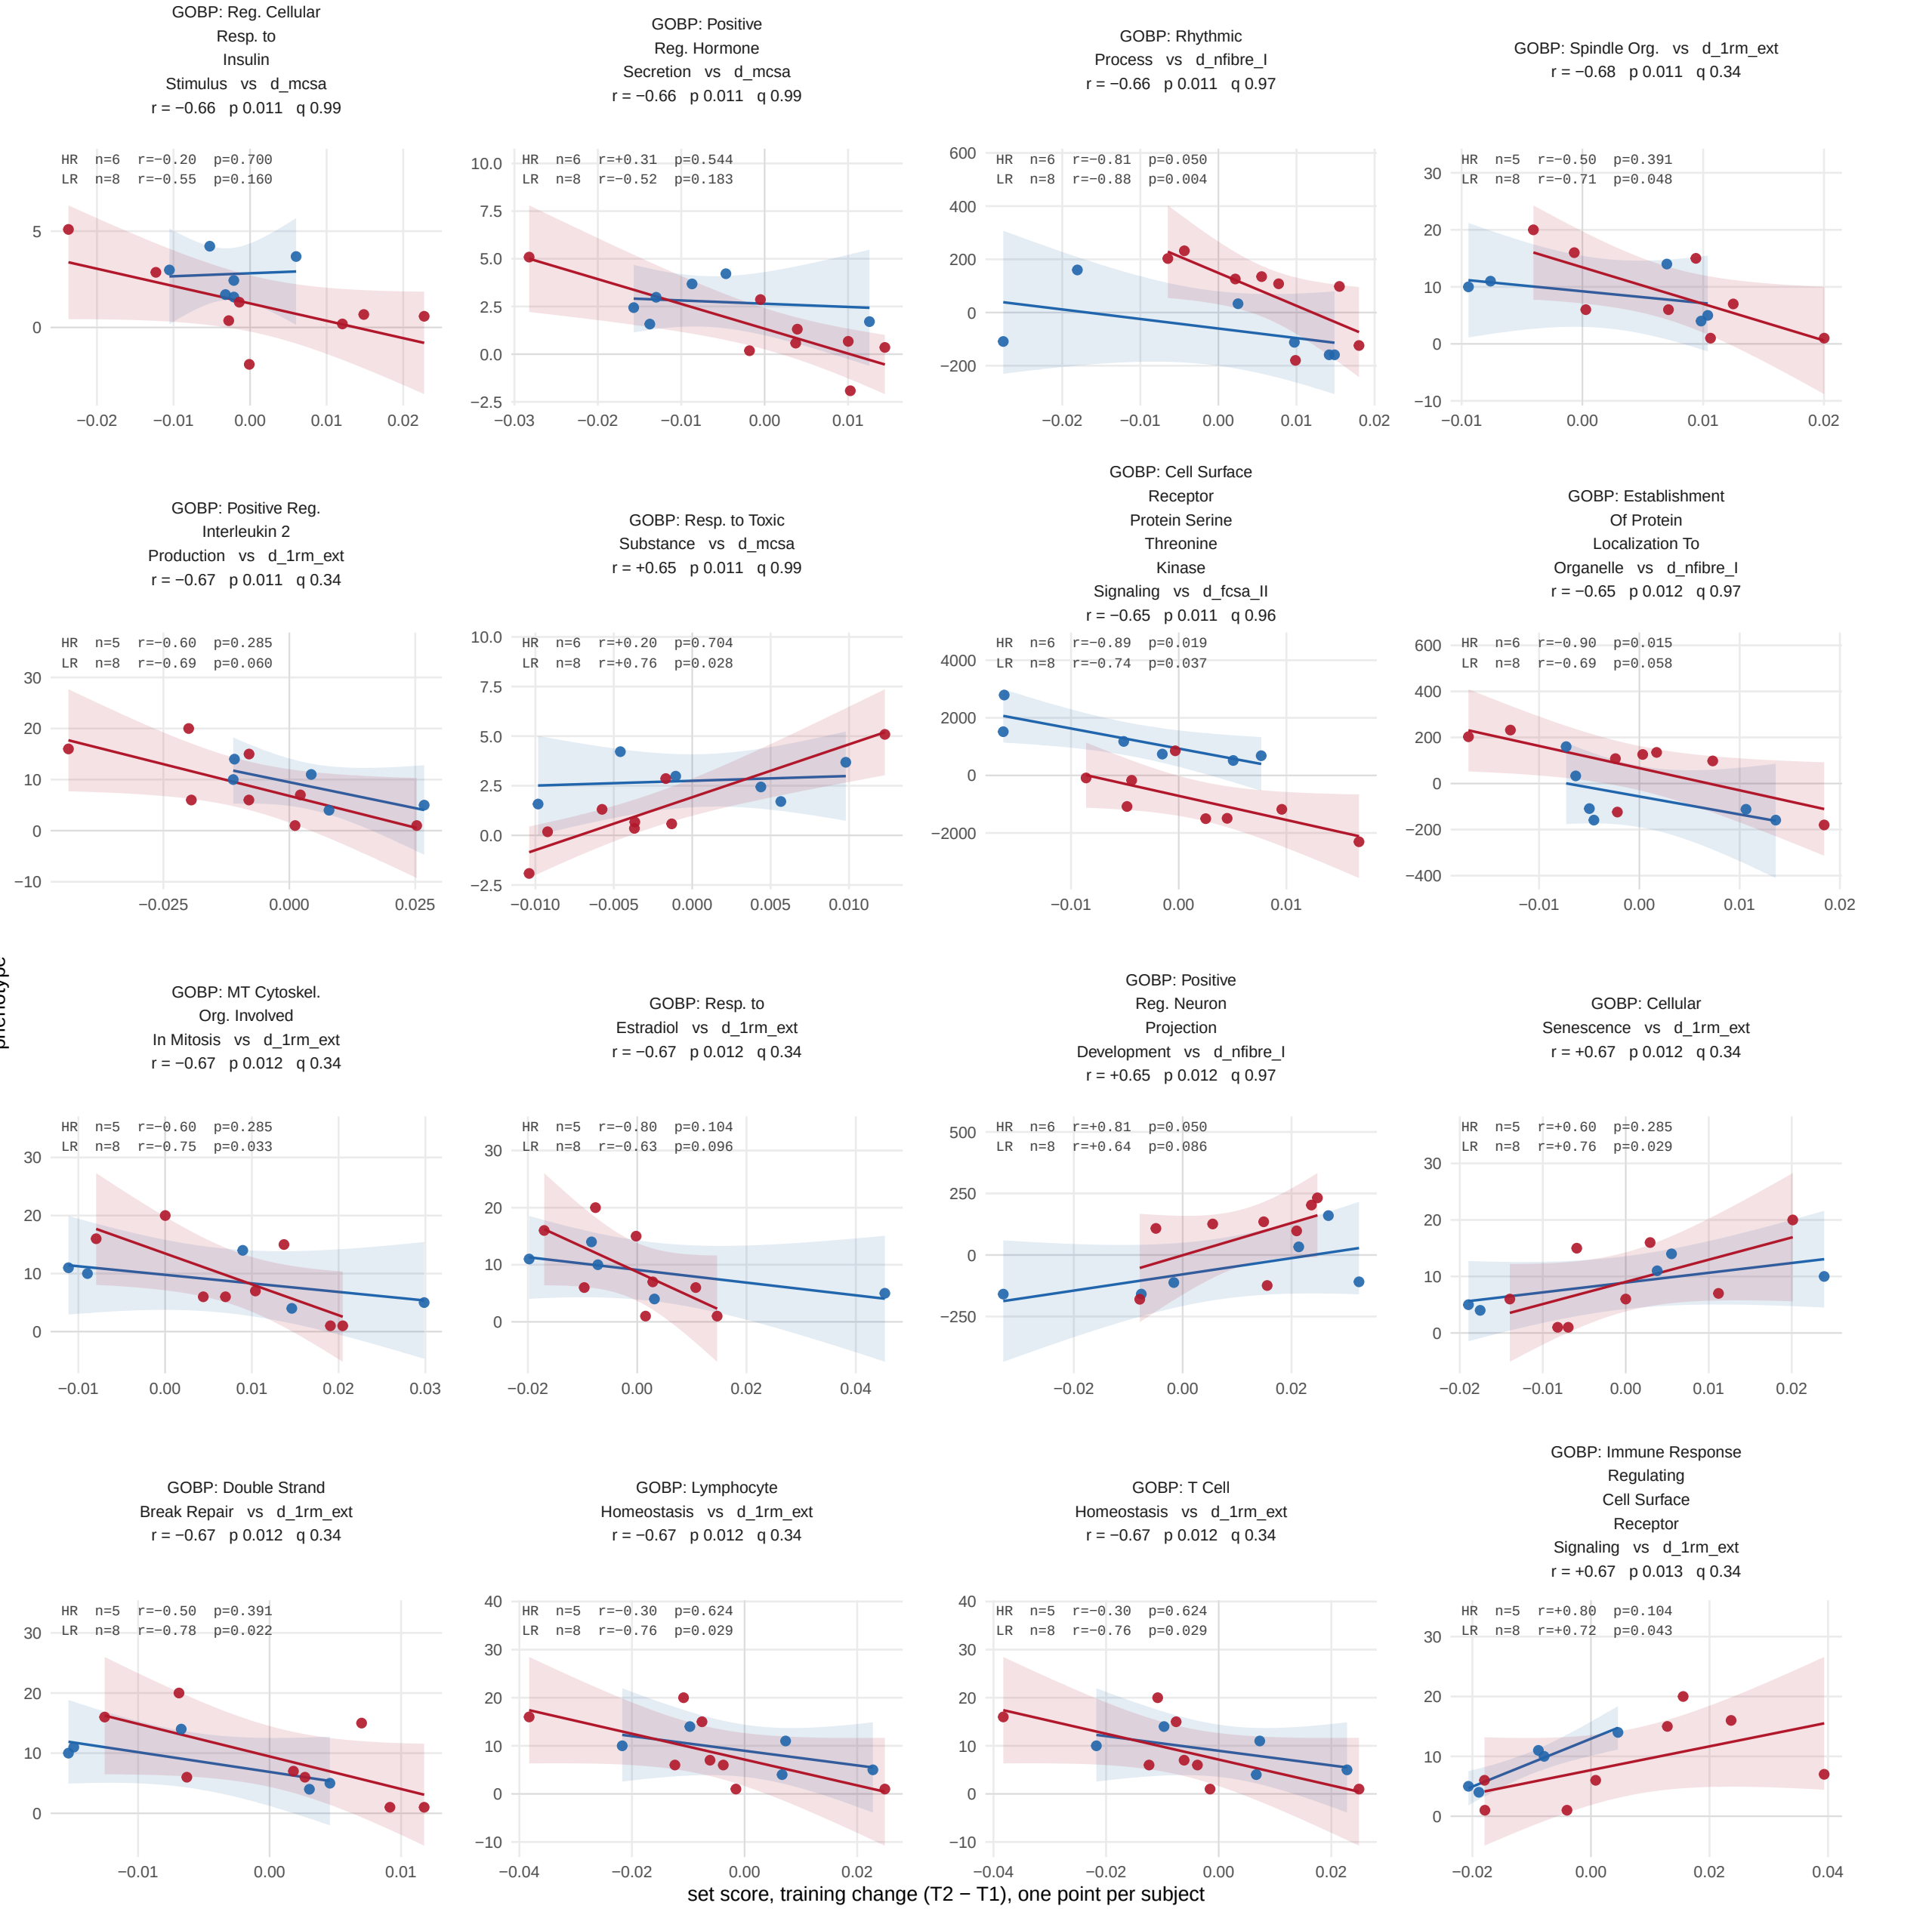

All 518 set-outcome pairs reaching nominal p, by collection then p. Lines are fitted within each arm; the header r is the pooled correlation, q from BH within collection, window and outcome. Nominal p, uncorrected. Each collection is read against its own expectation: GOBP 44.9 of 897, GO_Slim 2.9 of 58, Hallmark 1.7 of 33, KEGG_Legacy 3.1 of 62, Reactome 16.4 of 328.

Set score against phenotype, training change (T2 – T1)



Spearman, subjects pooled across arms



All 518 set-outcome pairs reaching nominal p, by collection then p. Lines are fitted within each arm; the header r is the pooled correlation, q from BH within collection, window and outcome. Nominal p, uncorrected. Each collection is read against its own expectation: GOBP 44.9 of 897, GO_Slim 2.9 of 58, Hallmark 1.7 of 33, KEGG_Legacy 3.1 of 62, Reactome 16.4 of 328.

Set score against phenotype, training change (T2 – T1)



Spearman, subjects pooled across arms

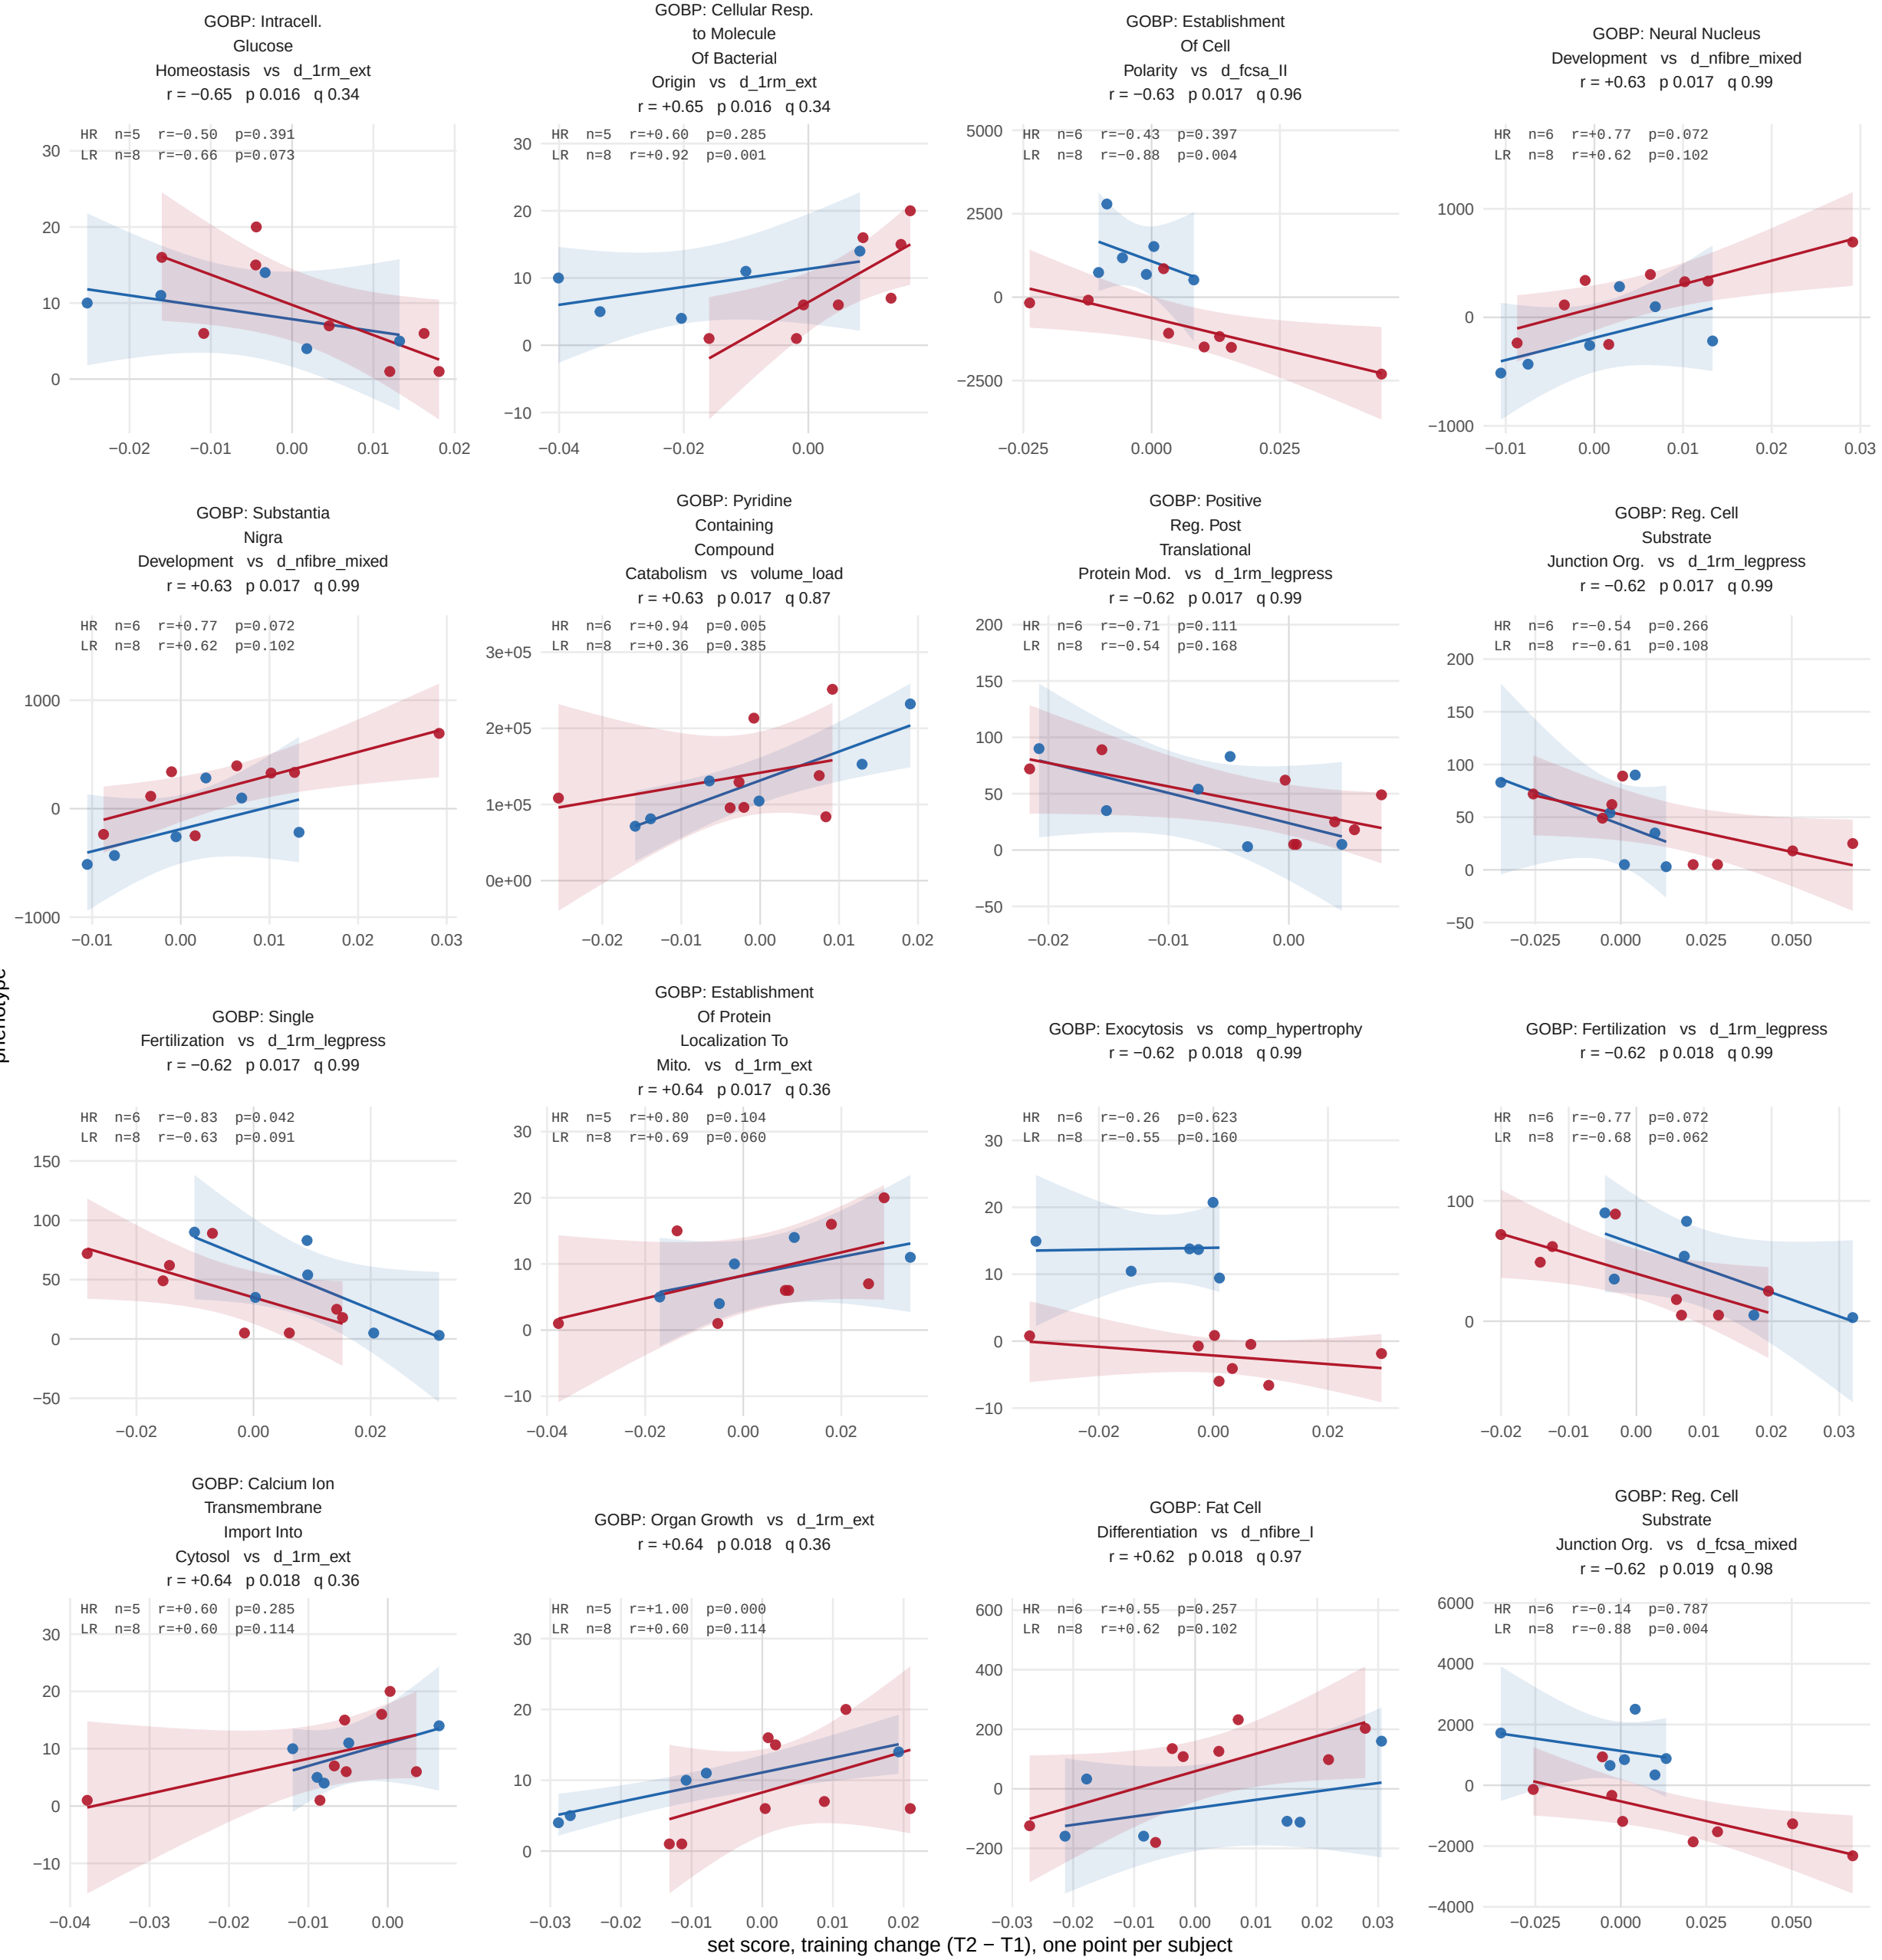

All 518 set-outcome pairs reaching nominal p, by collection then p. Lines are fitted within each arm; the header r is the pooled correlation, q from BH within collection, window and outcome. Nominal p, uncorrected. Each collection is read against its own expectation: GOBP 44.9 of 897, GO_Slim 2.9 of 58, Hallmark 1.7 of 33, KEGG_Legacy 3.1 of 62, Reactome 16.4 of 328.

Set score against phenotype, training change (T2 – T1)



Spearman, subjects pooled across arms

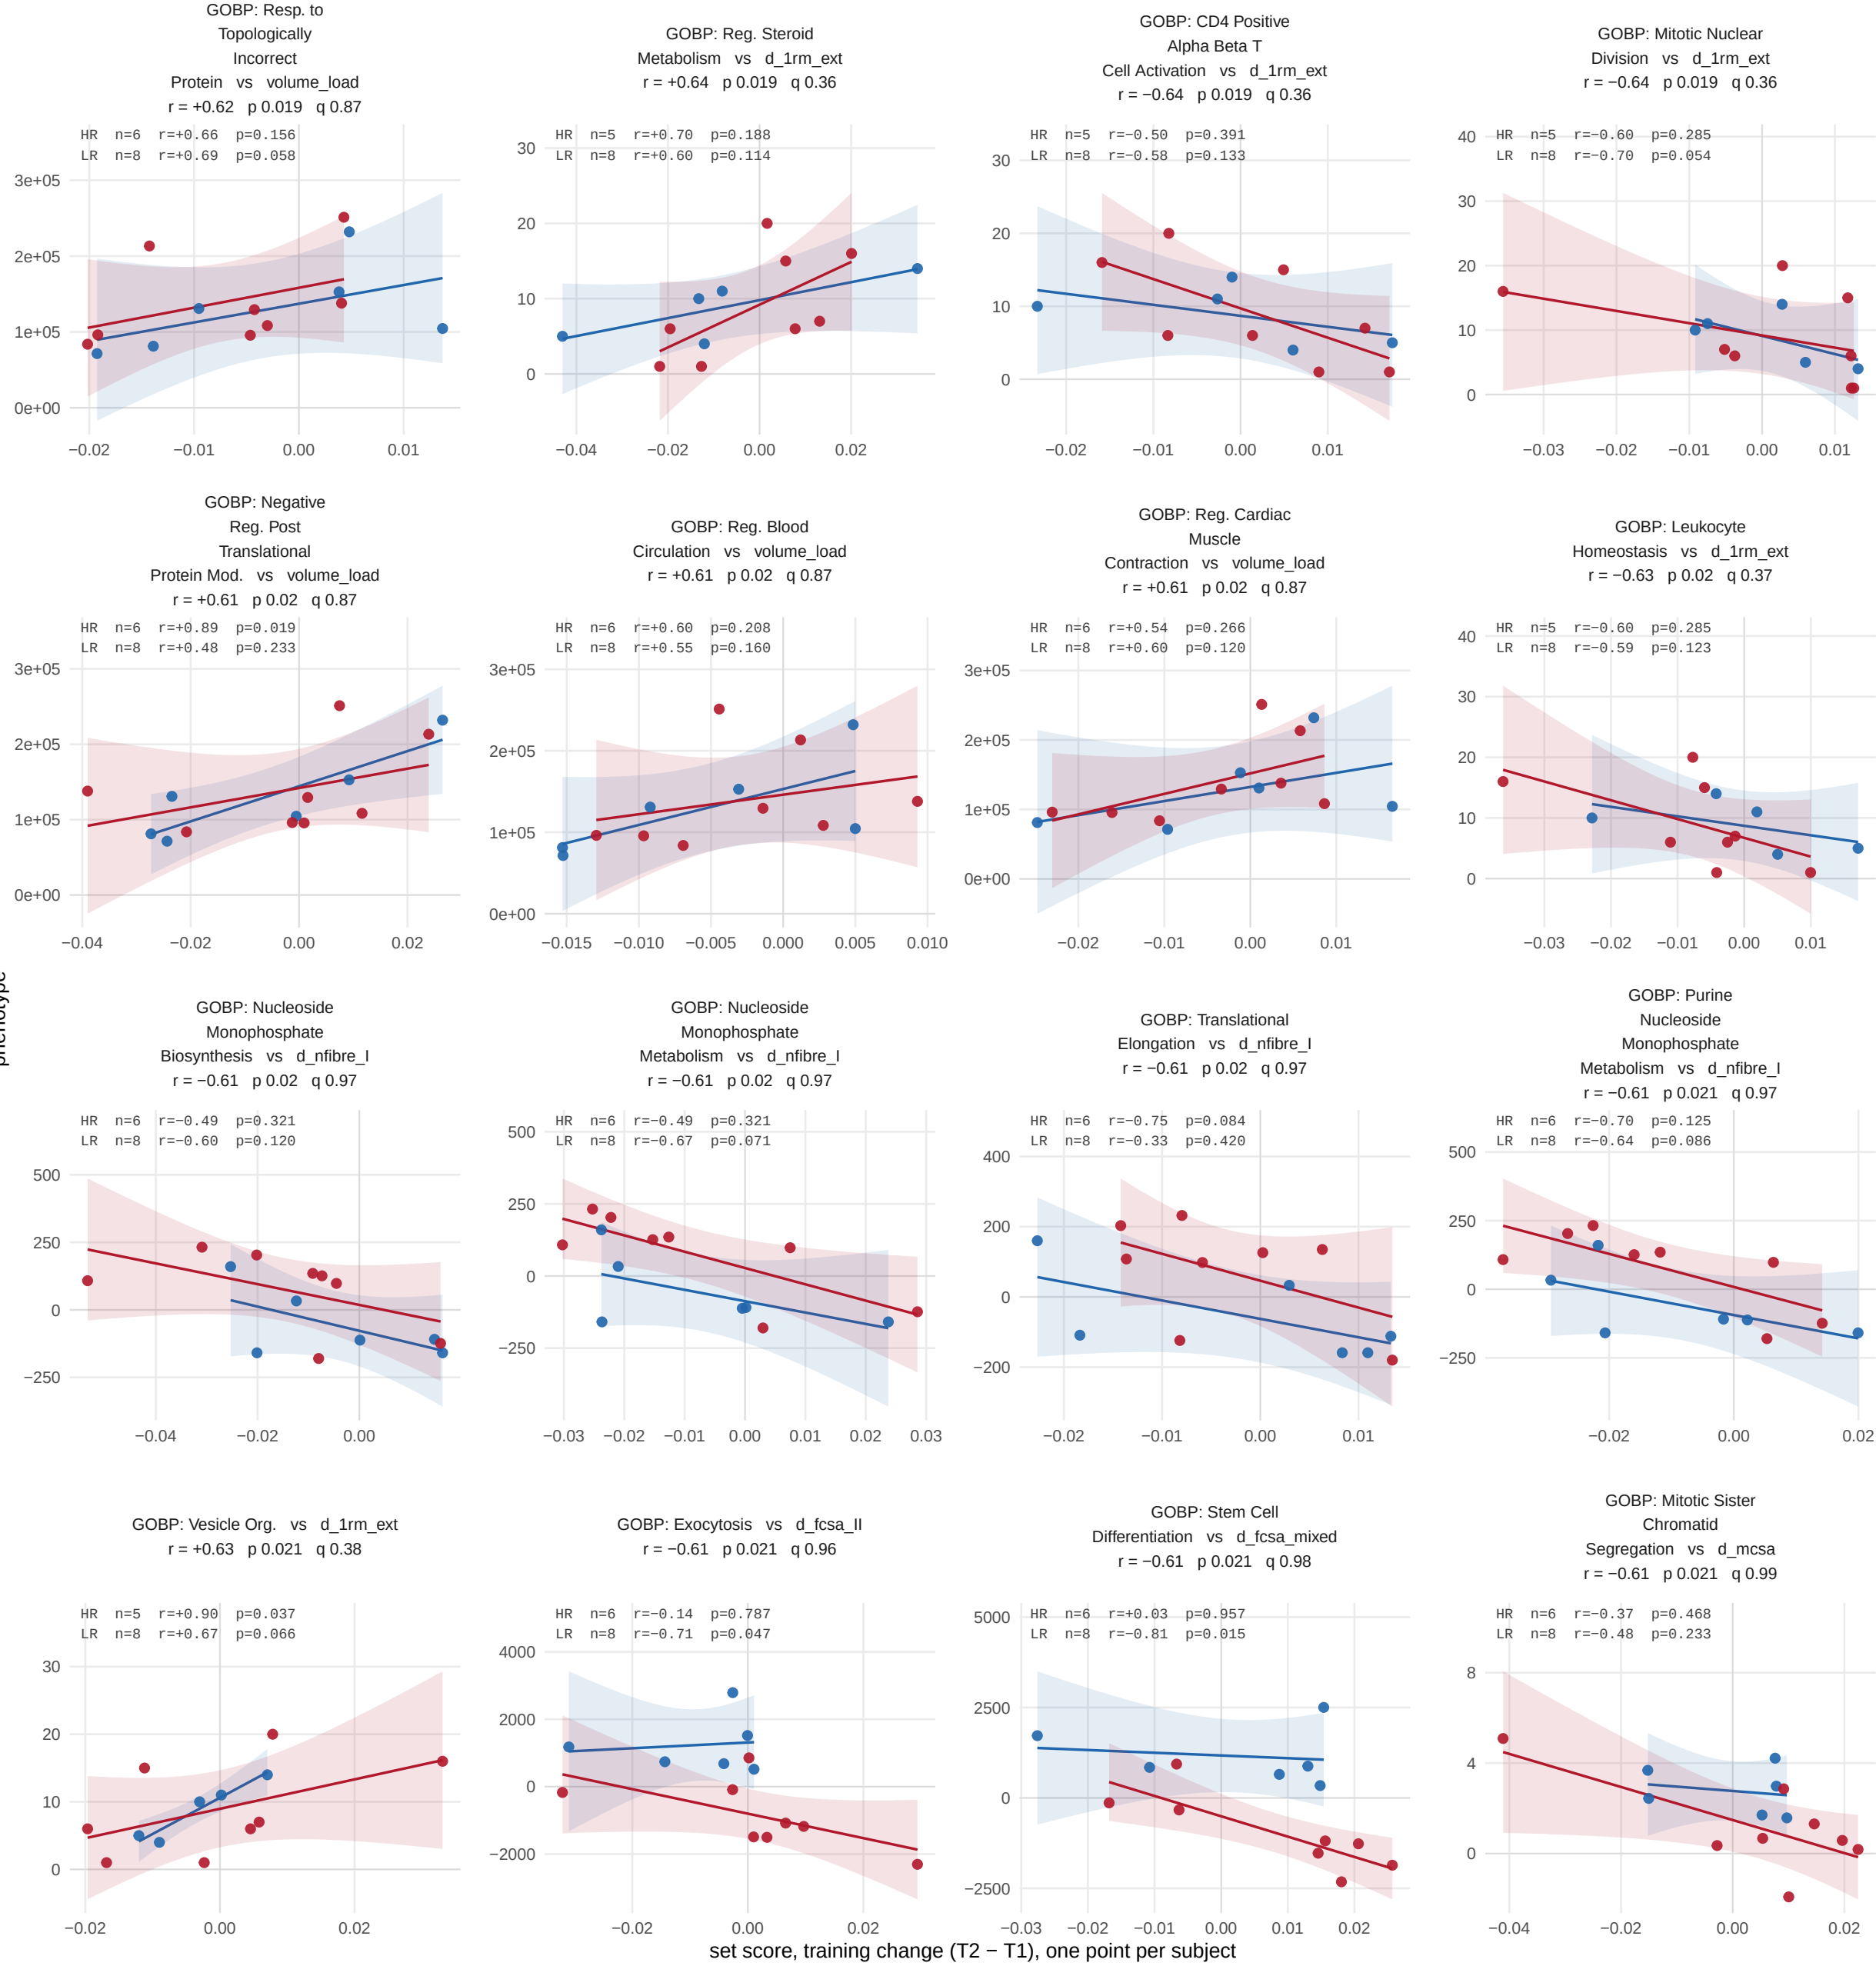

All 518 set-outcome pairs reaching nominal p, by collection then p. Lines are fitted within each arm; the header r is the pooled correlation, q from BH within collection, window and outcome. Nominal p, uncorrected. Each collection is read against its own expectation: GOBP 44.9 of 897, GO_Slim 2.9 of 58, Hallmark 1.7 of 33, KEGG_Legacy 3.1 of 62, Reactome 16.4 of 328.

Set score against phenotype, training change (T2 – T1)

Spearman, subjects pooled across arms

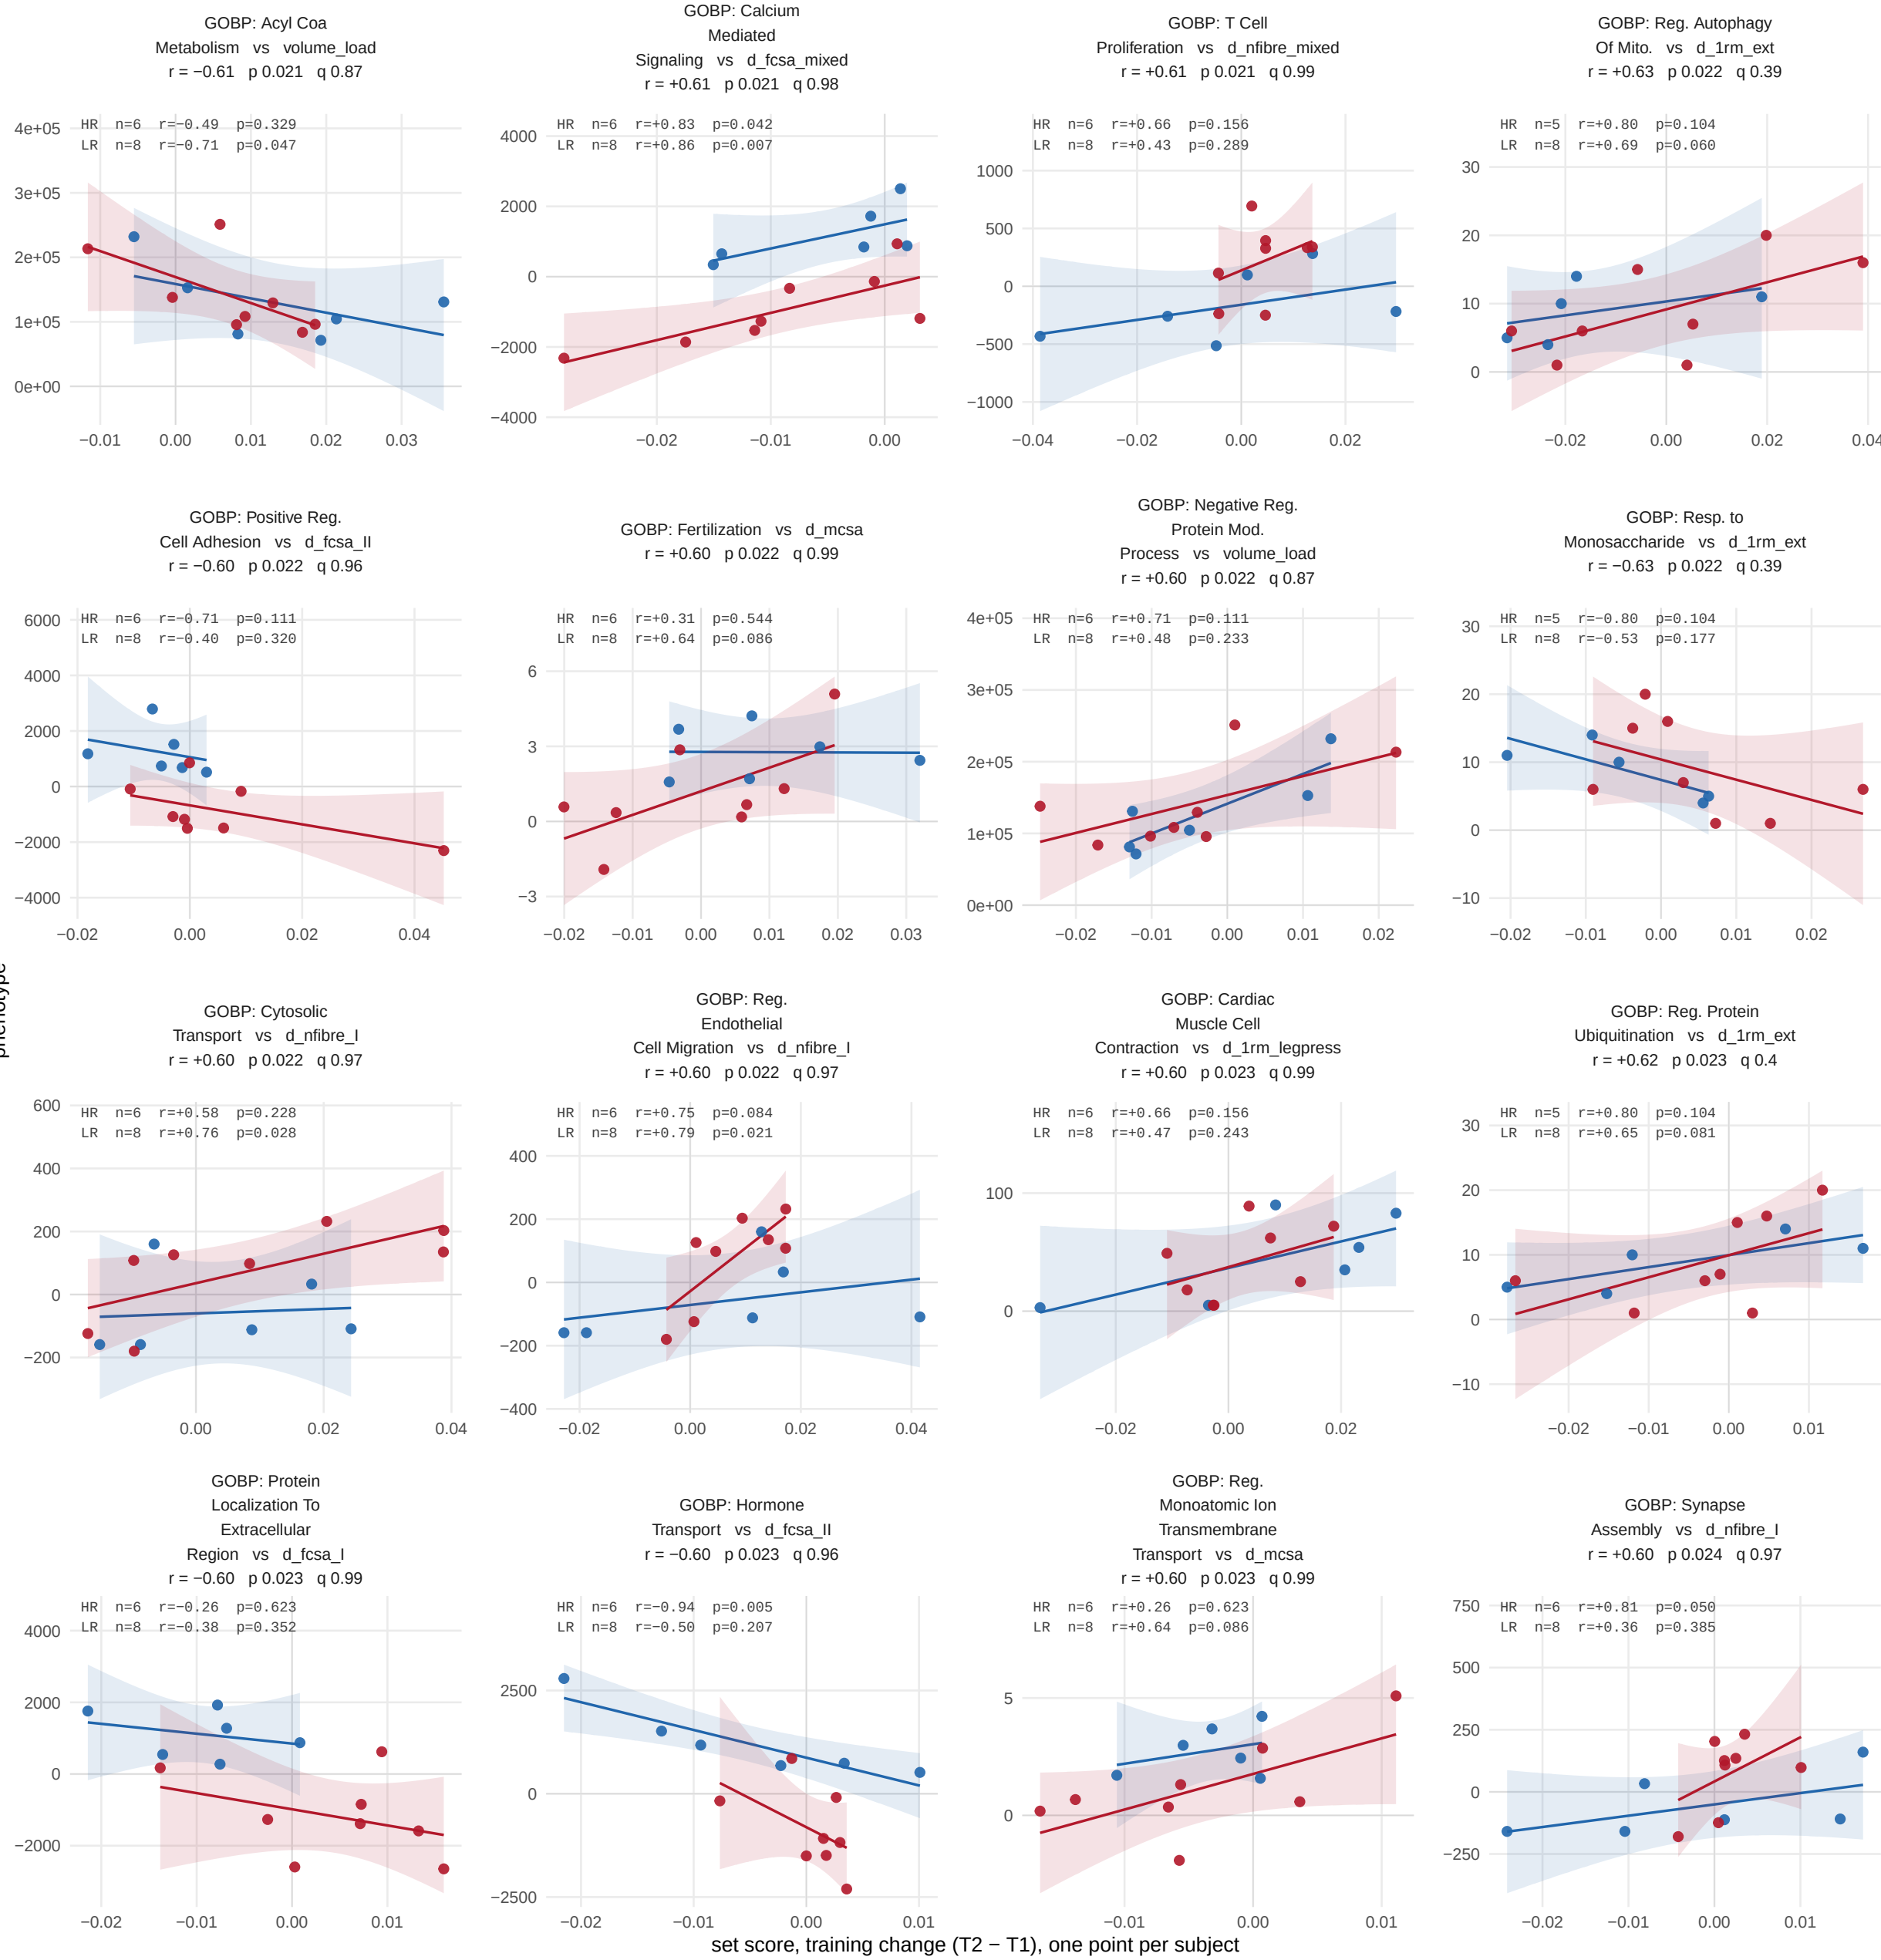


All 518 set-outcome pairs reaching nominal p, by collection then p. Lines are fitted within each arm; the header r is the pooled correlation, q from BH within collection, window and outcome. Nominal p, uncorrected. Each collection is read against its own expectation: GOBP 44.9 of 897, GO_Slim 2.9 of 58, Hallmark 1.7 of 33, KEGG_Legacy 3.1 of 62, Reactome 16.4 of 328.

Set score against phenotype, training change (T2 – T1)

Spearman, subjects pooled across arms

HR LR

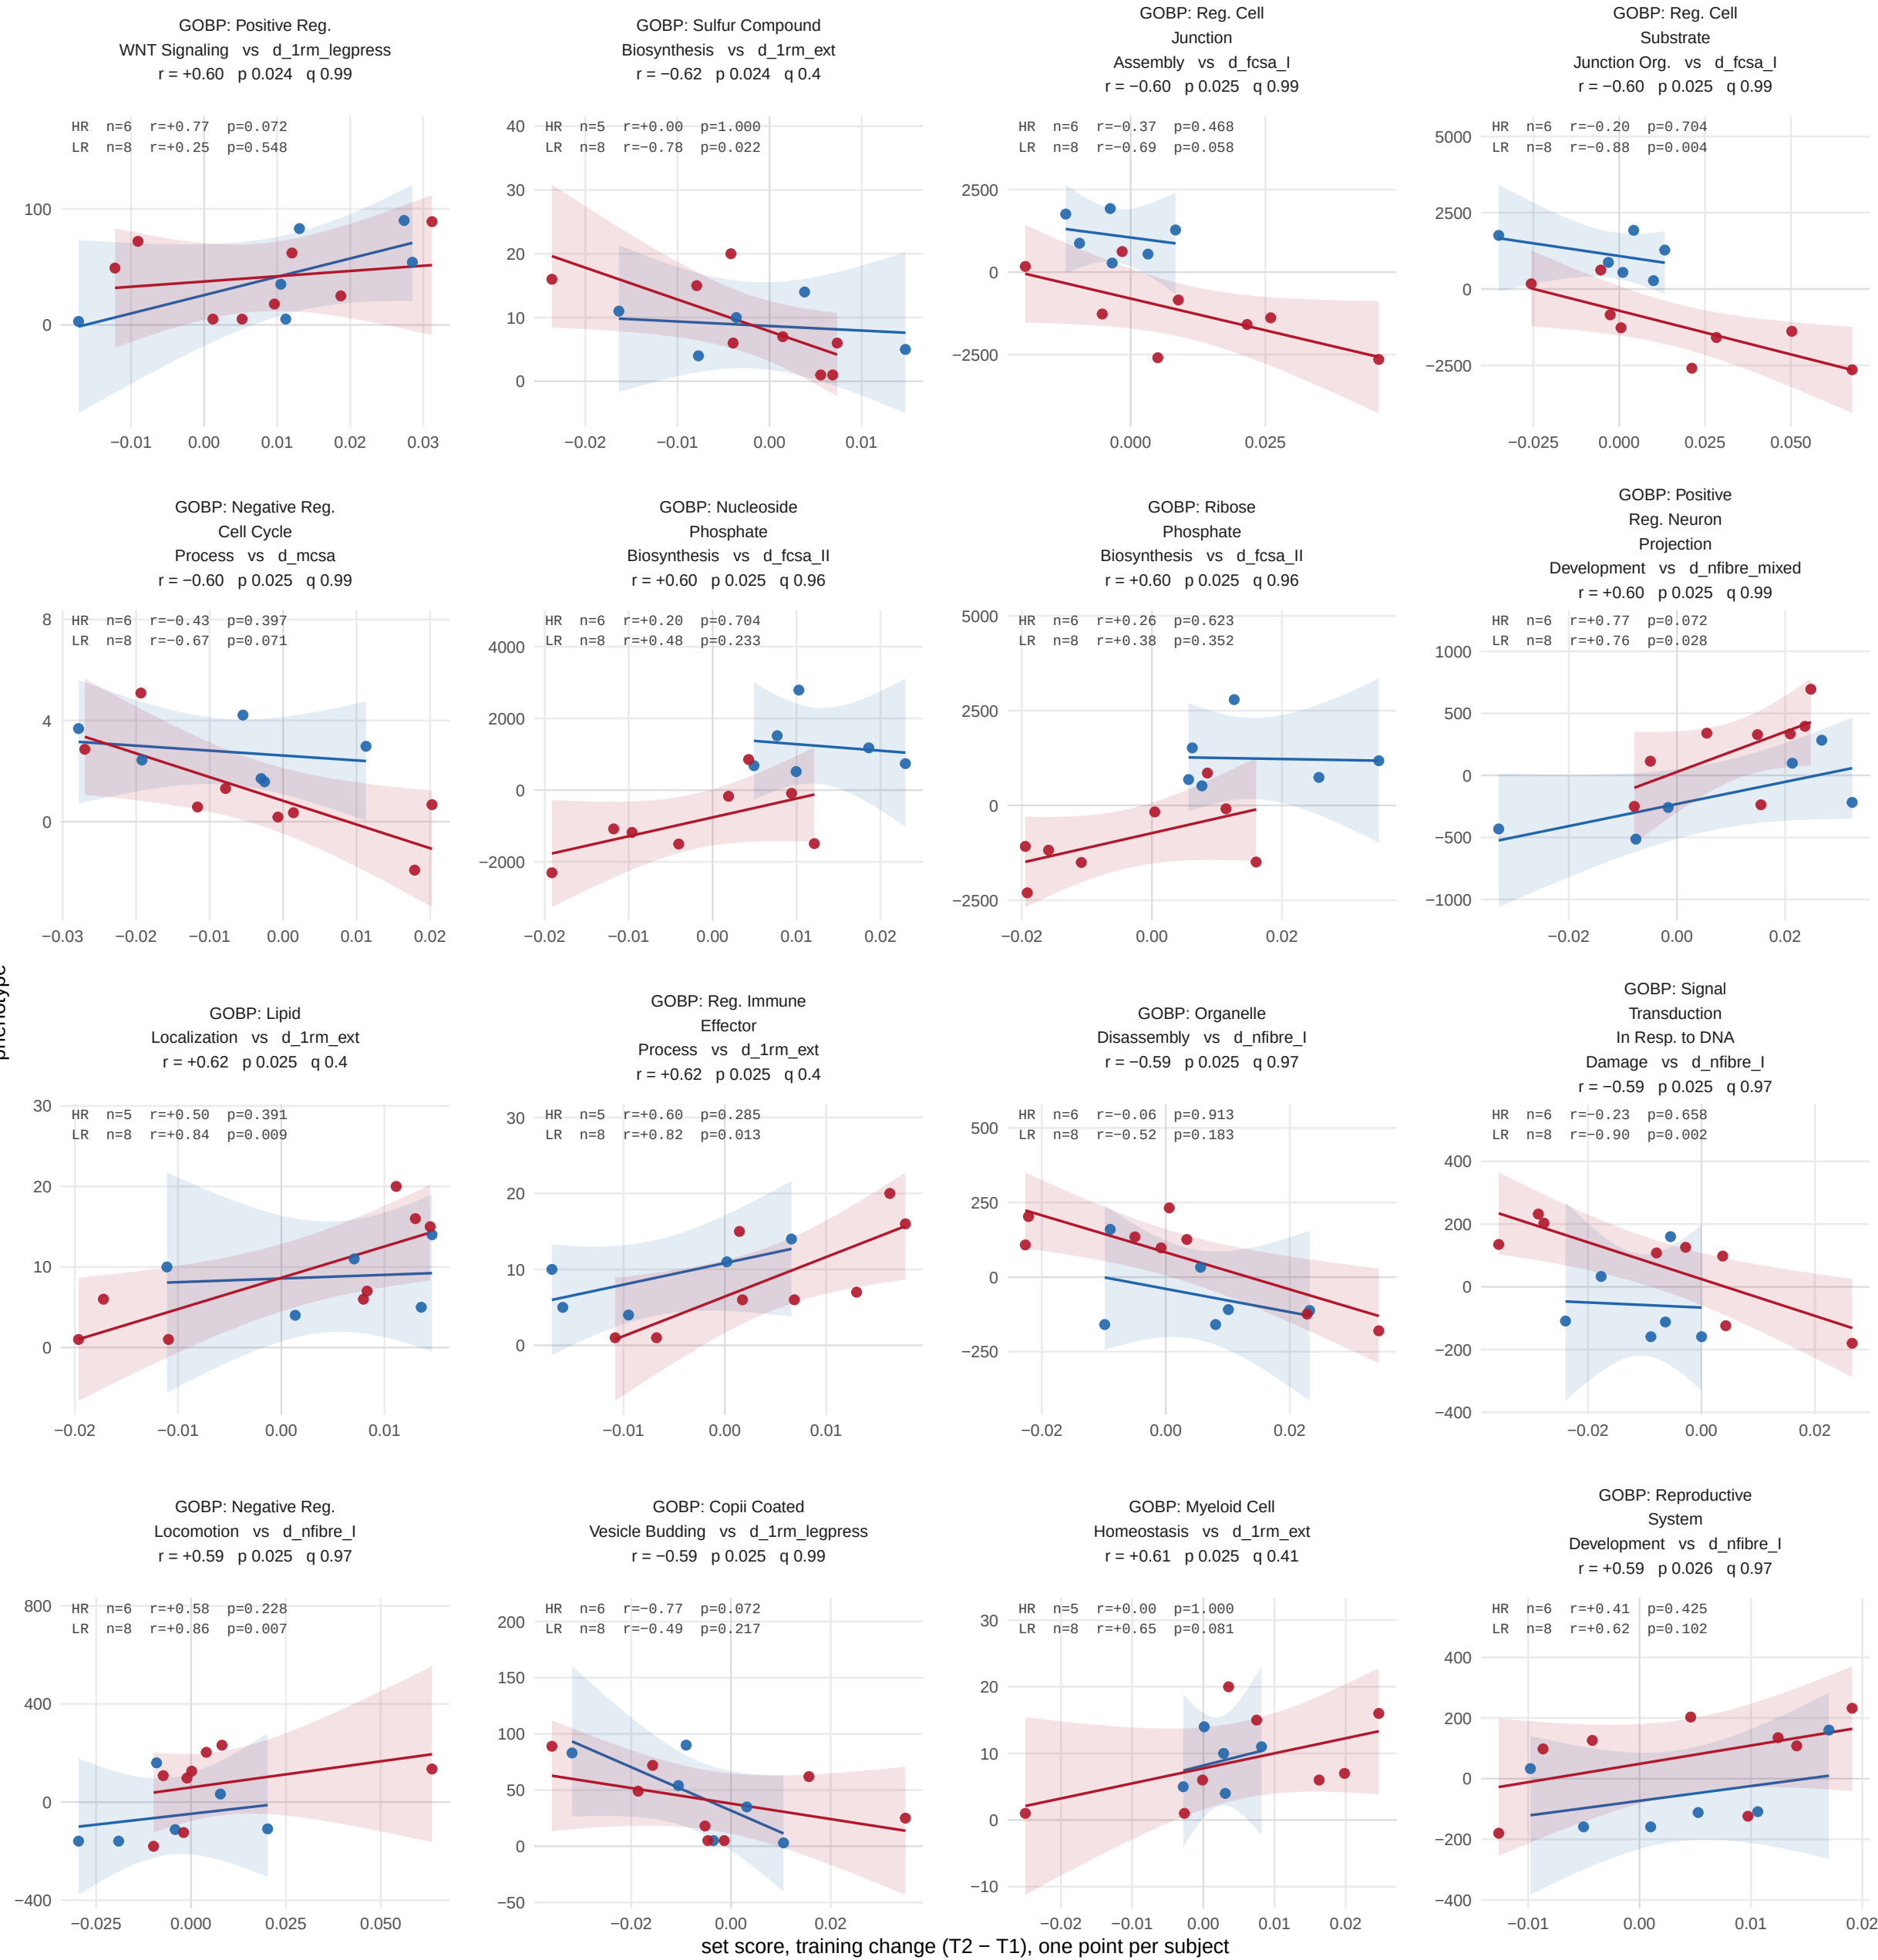

All 518 set–outcome pairs reaching nominal p, by collection then p. Lines are fitted within each arm; the header r is the pooled correlation, q from BH within collection, window and outcome. Nominal p, uncorrected. Each collection is read against its own expectation: GOBP 44.9 of 897, GO_Slim 2.9 of 58, Hallmark 1.7 of 33, KEGG_Legacy 3.1 of 62, Reactome 16.4 of 328.

Set score against phenotype, training change (T2 – T1)

Spearman, subjects pooled across arms

HR LR




All 518 set-outcome pairs reaching nominal p, by collection then p. Lines are fitted within each arm; the header r is the pooled correlation, q from BH within collection, window and outcome. Nominal p, uncorrected. Each collection is read against its own expectation: GOBP 44.9 of 897, GO_Slim 2.9 of 58, Hallmark 1.7 of 33, KEGG_Legacy 3.1 of 62, Reactome 16.4 of 328.

Set score against phenotype, training change (T2 – T1)

Spearman, subjects pooled across arms

HR LR

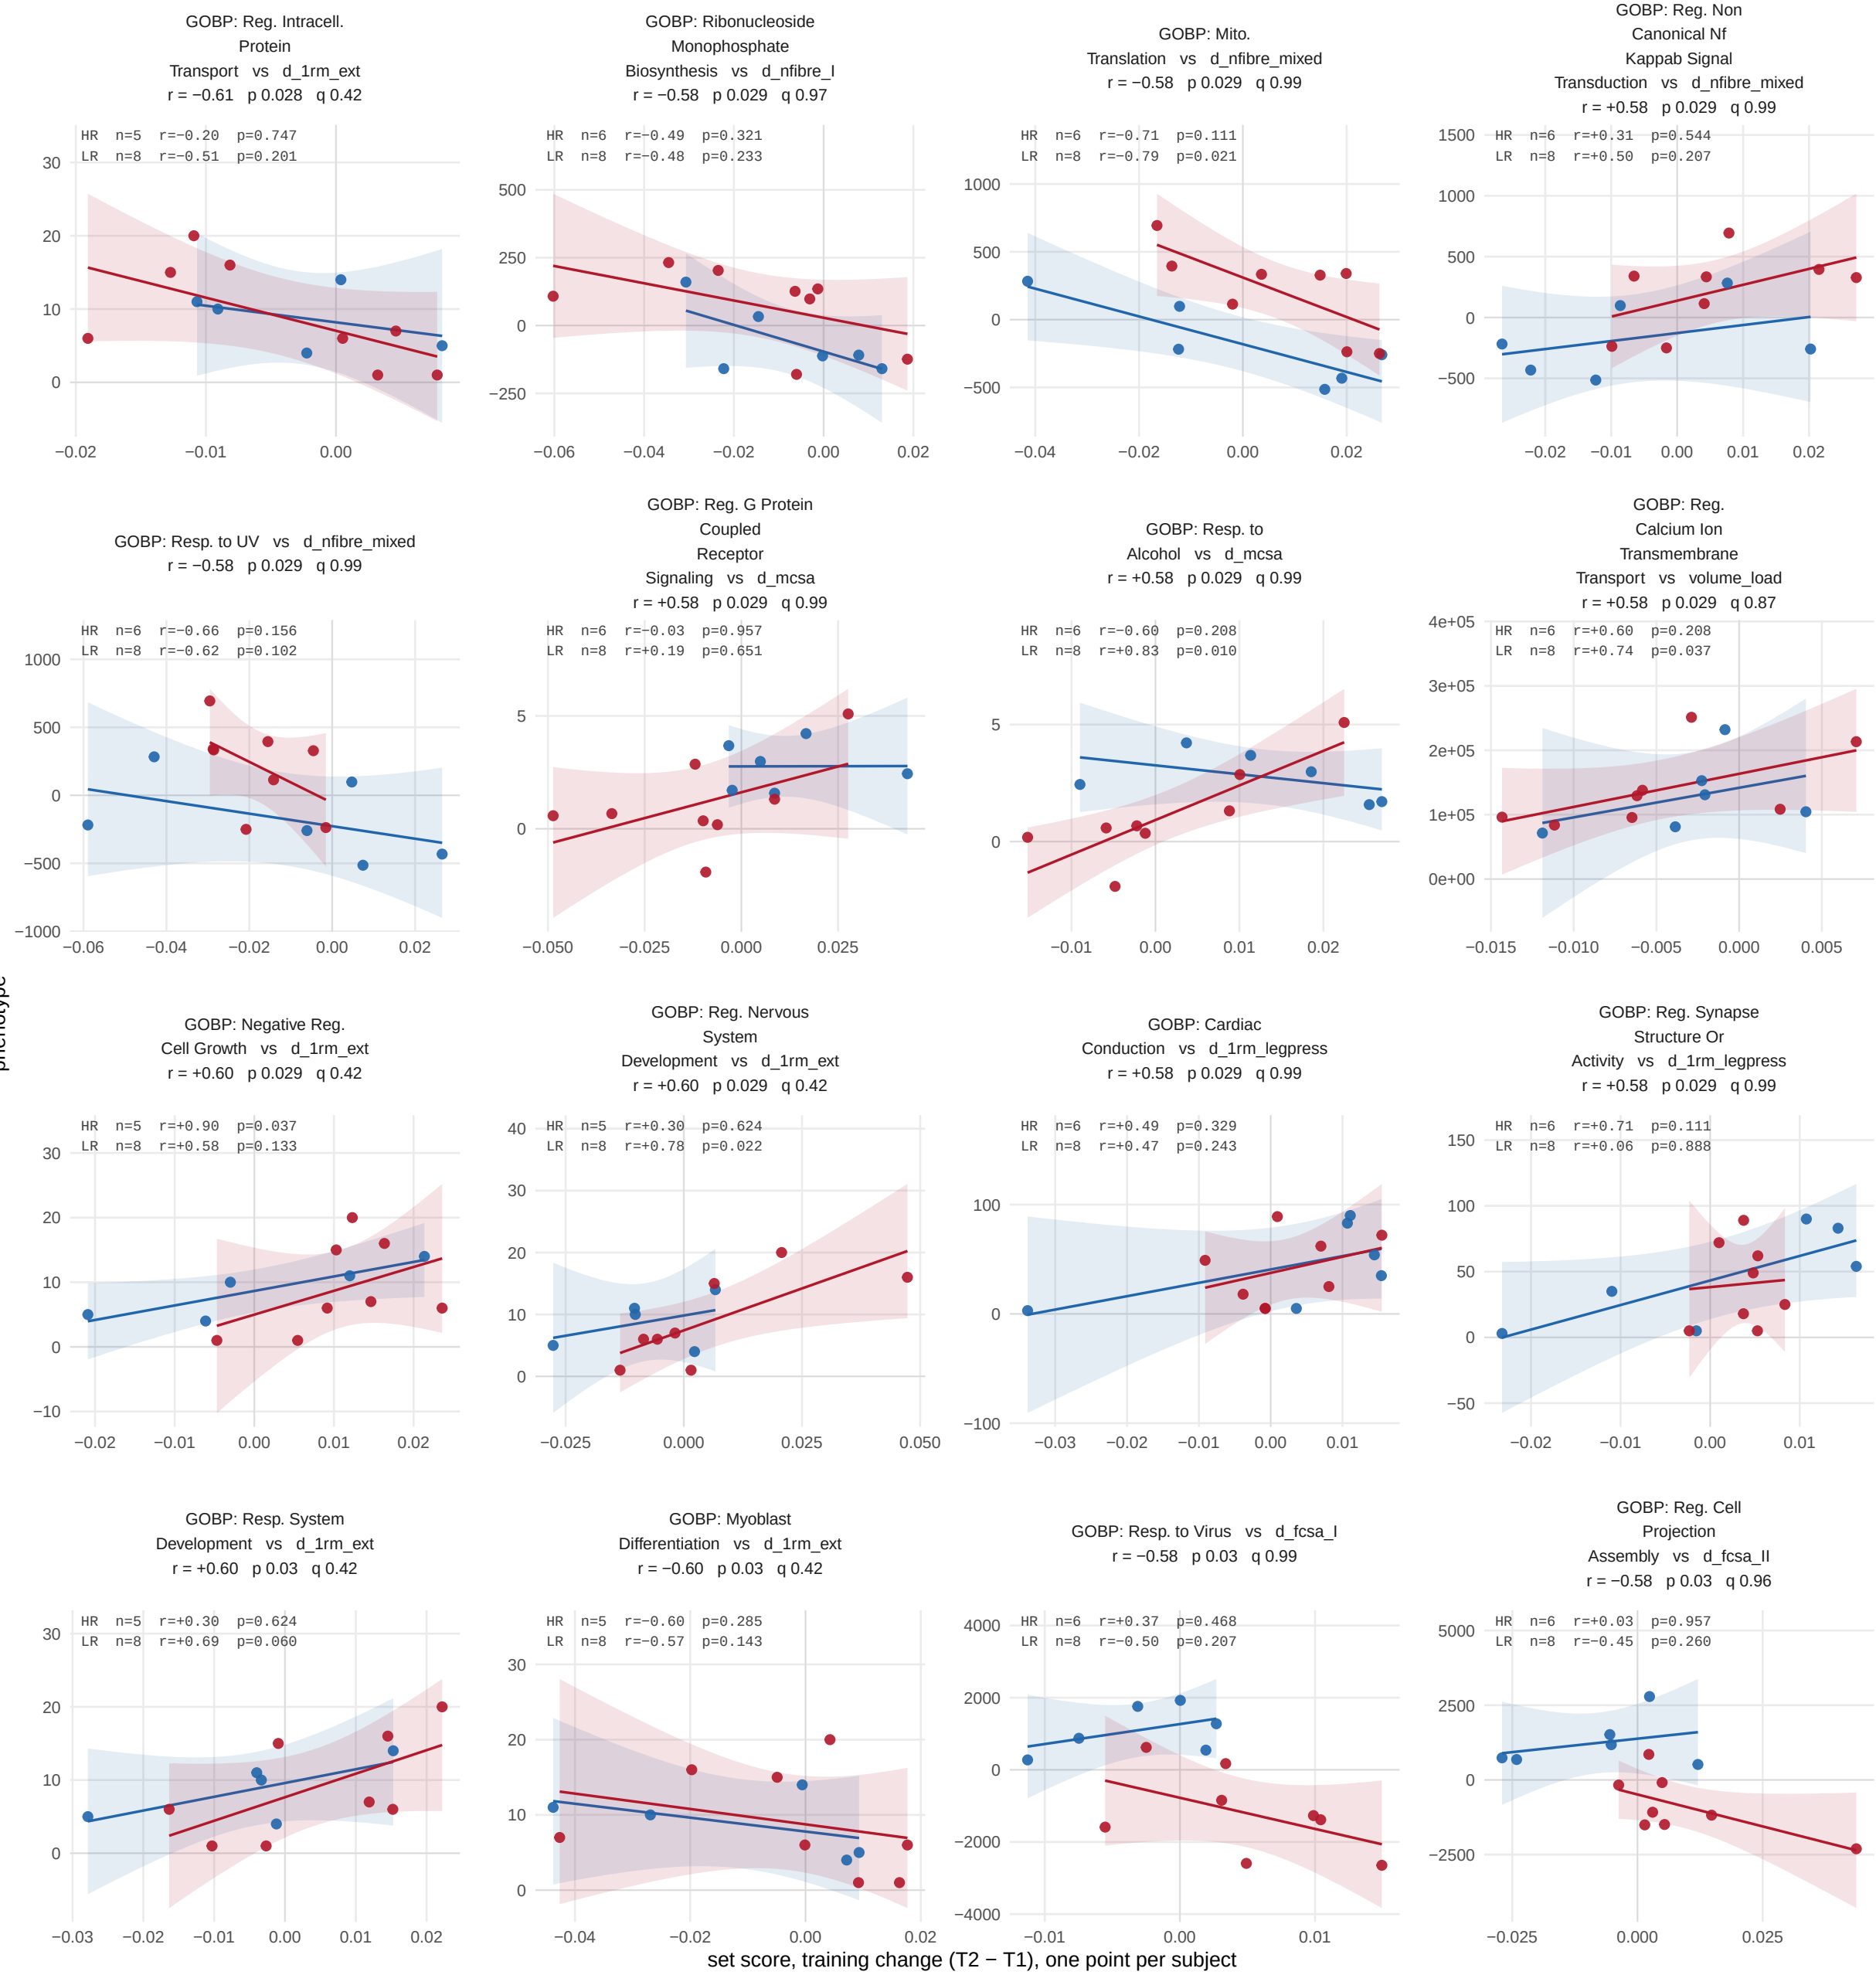


All 518 set-outcome pairs reaching nominal p, by collection then p. Lines are fitted within each arm; the header r is the pooled correlation, q from BH within collection, window and outcome. Nominal p, uncorrected. Each collection is read against its own expectation: GOBP 44.9 of 897, GO_Slim 2.9 of 58, Hallmark 1.7 of 33, KEGG_Legacy 3.1 of 62, Reactome 16.4 of 328.

Set score against phenotype, training change (T2 – T1)

Spearman, subjects pooled across arms



HR LR

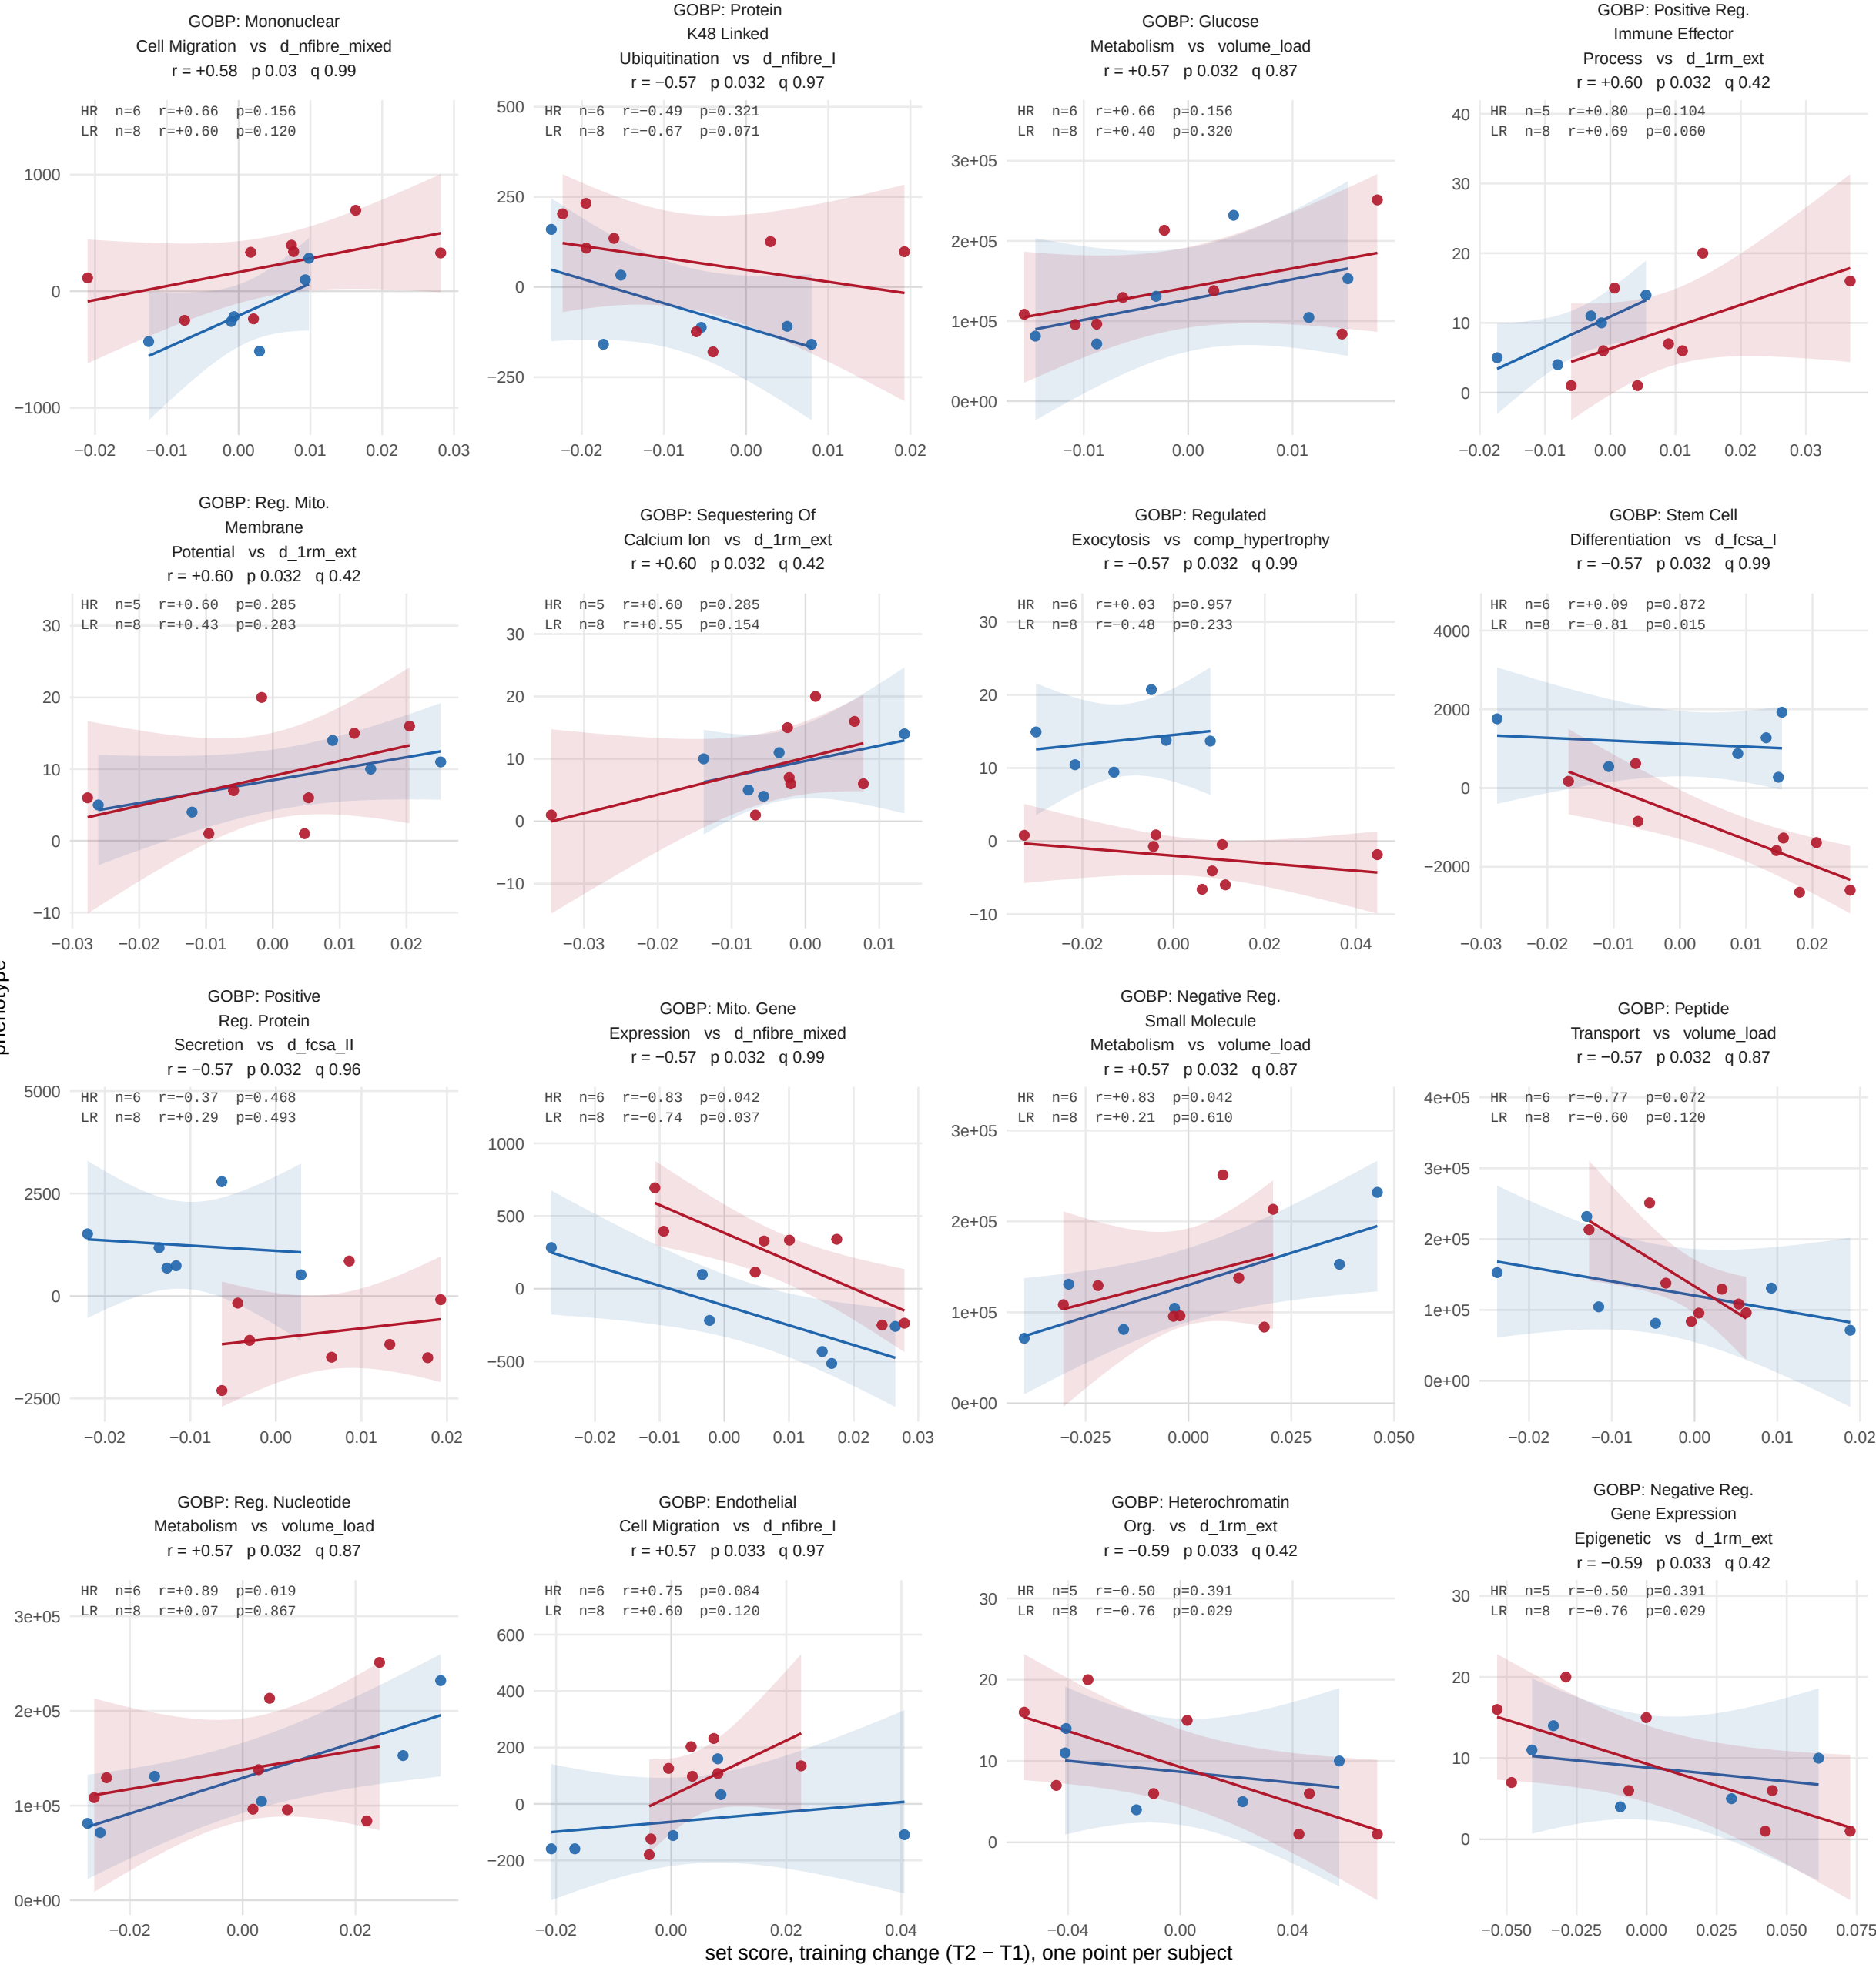

All 518 set-outcome pairs reaching nominal p, by collection then p. Lines are fitted within each arm; the header r is the pooled correlation, q from BH within collection, window and outcome. Nominal p, uncorrected. Each collection is read against its own expectation: GOBP 44.9 of 897, GO_Slim 2.9 of 58, Hallmark 1.7 of 33, KEGG_Legacy 3.1 of 62, Reactome 16.4 of 328.

Set score against phenotype, training change (T2 – T1)

Spearman, subjects pooled across arms

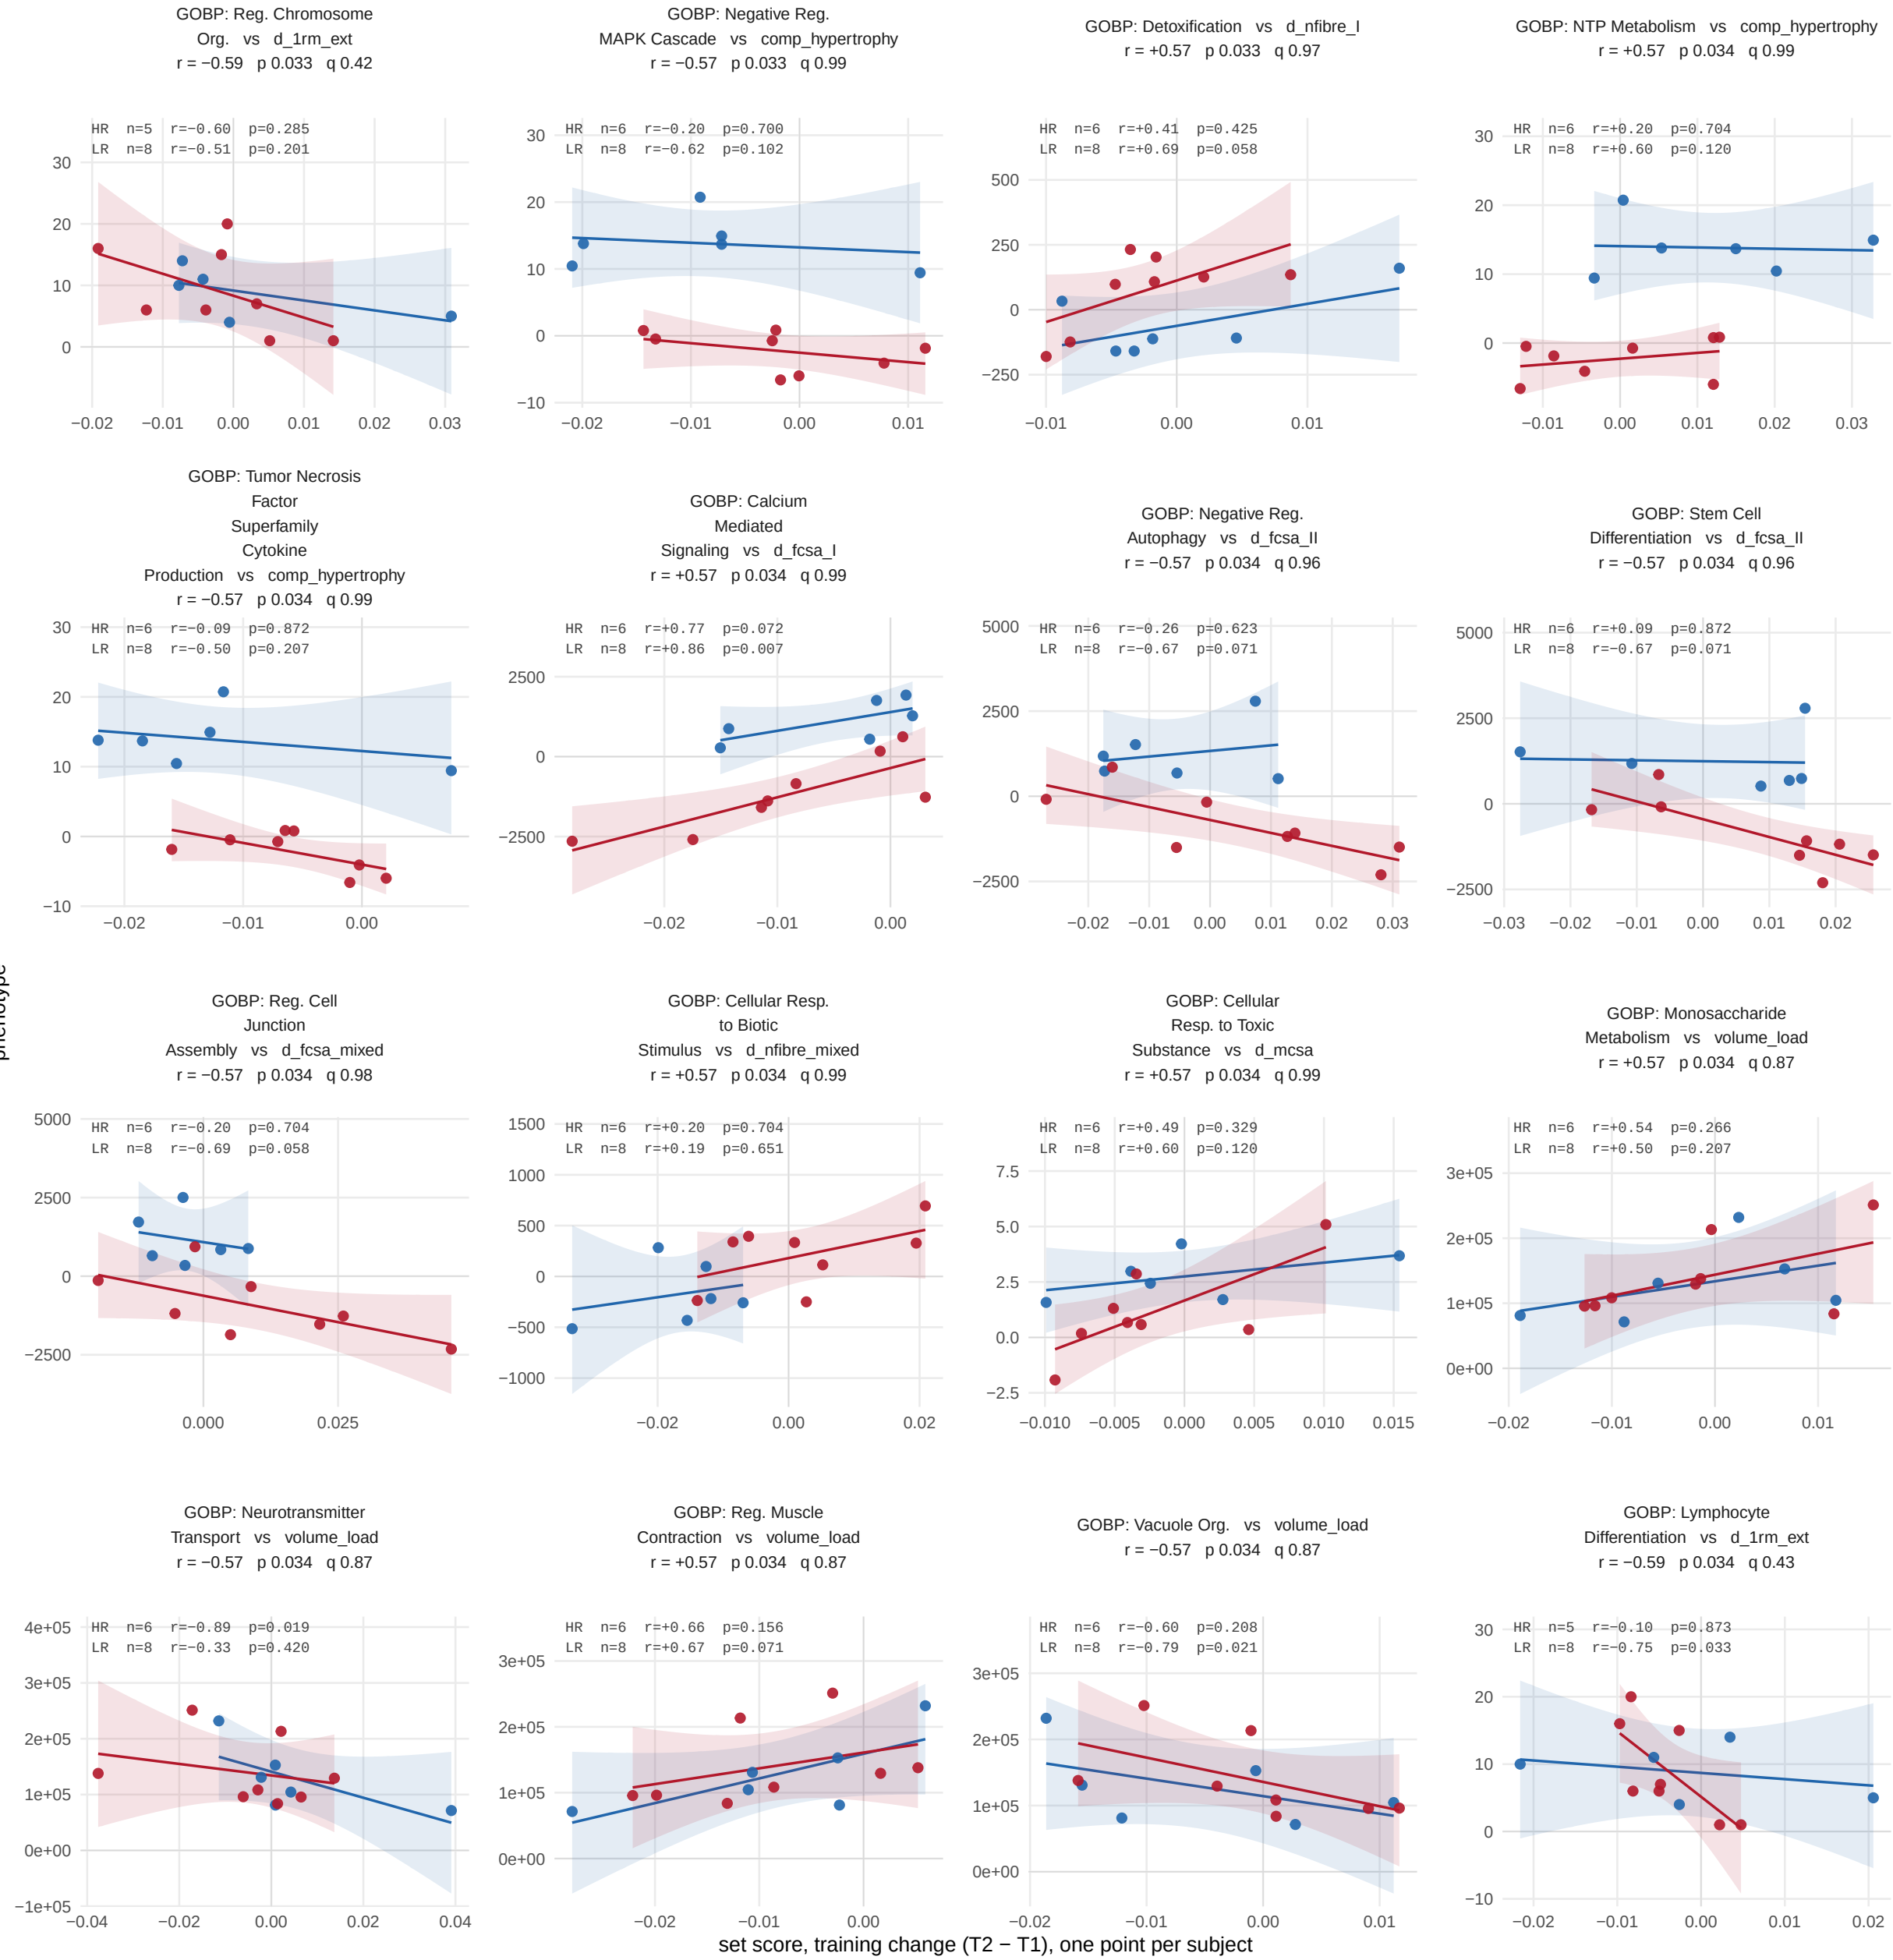


All 518 set-outcome pairs reaching nominal p, by collection then p. Lines are fitted within each arm; the header r is the pooled correlation, q from BH within collection, window and outcome. Nominal p, uncorrected. Each collection is read against its own expectation: GOBP 44.9 of 897, GO_Slim 2.9 of 58, Hallmark 1.7 of 33, KEGG_Legacy 3.1 of 62, Reactome 16.4 of 328.

Set score against phenotype, training change (T2 – T1)

Spearman, subjects pooled across arms

HR LR

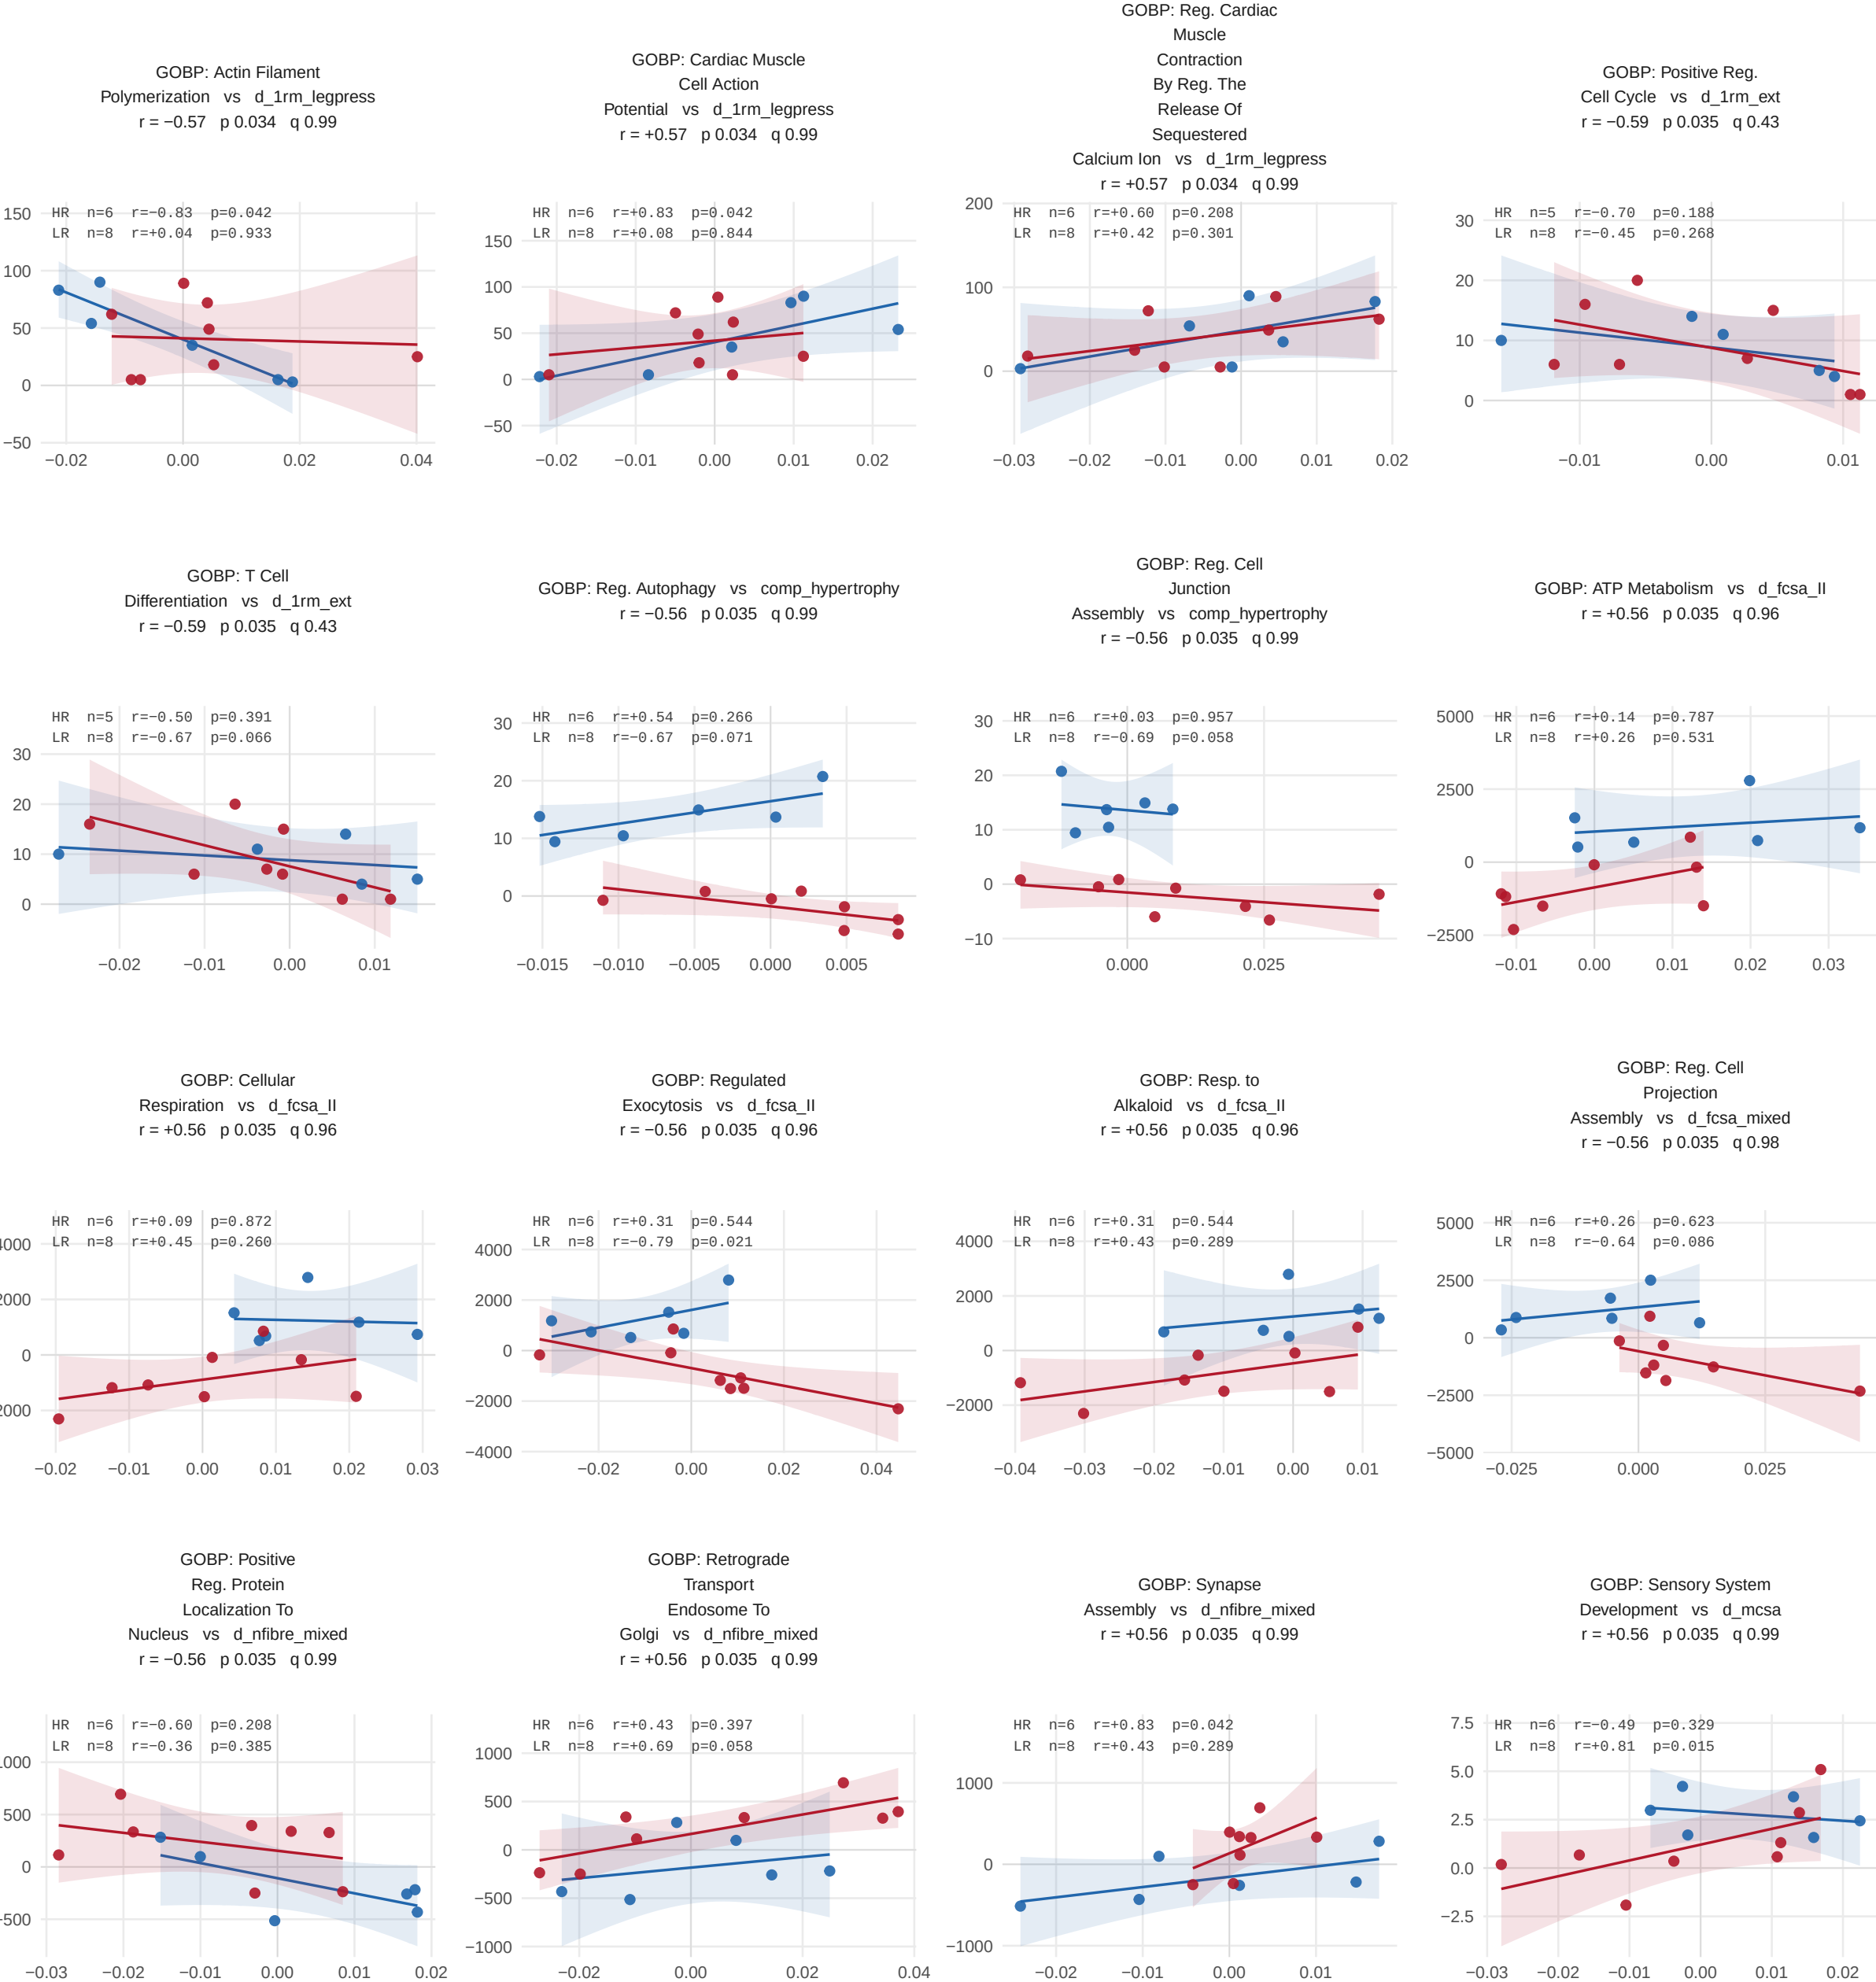


All 518 set-outcome pairs reaching nominal p, by collection then p. Lines are fitted within each arm; the header r is the pooled correlation, q from BH within collection, window and outcome. Nominal p, uncorrected. Each collection is read against its own expectation: GOBP 44.9 of 897, GO_Slim 2.9 of 58, Hallmark 1.7 of 33, KEGG_Legacy 3.1 of 62, Reactome 16.4 of 328.

Set score against phenotype, training change (T2 – T1)

Spearman, subjects pooled across arms

HR LR

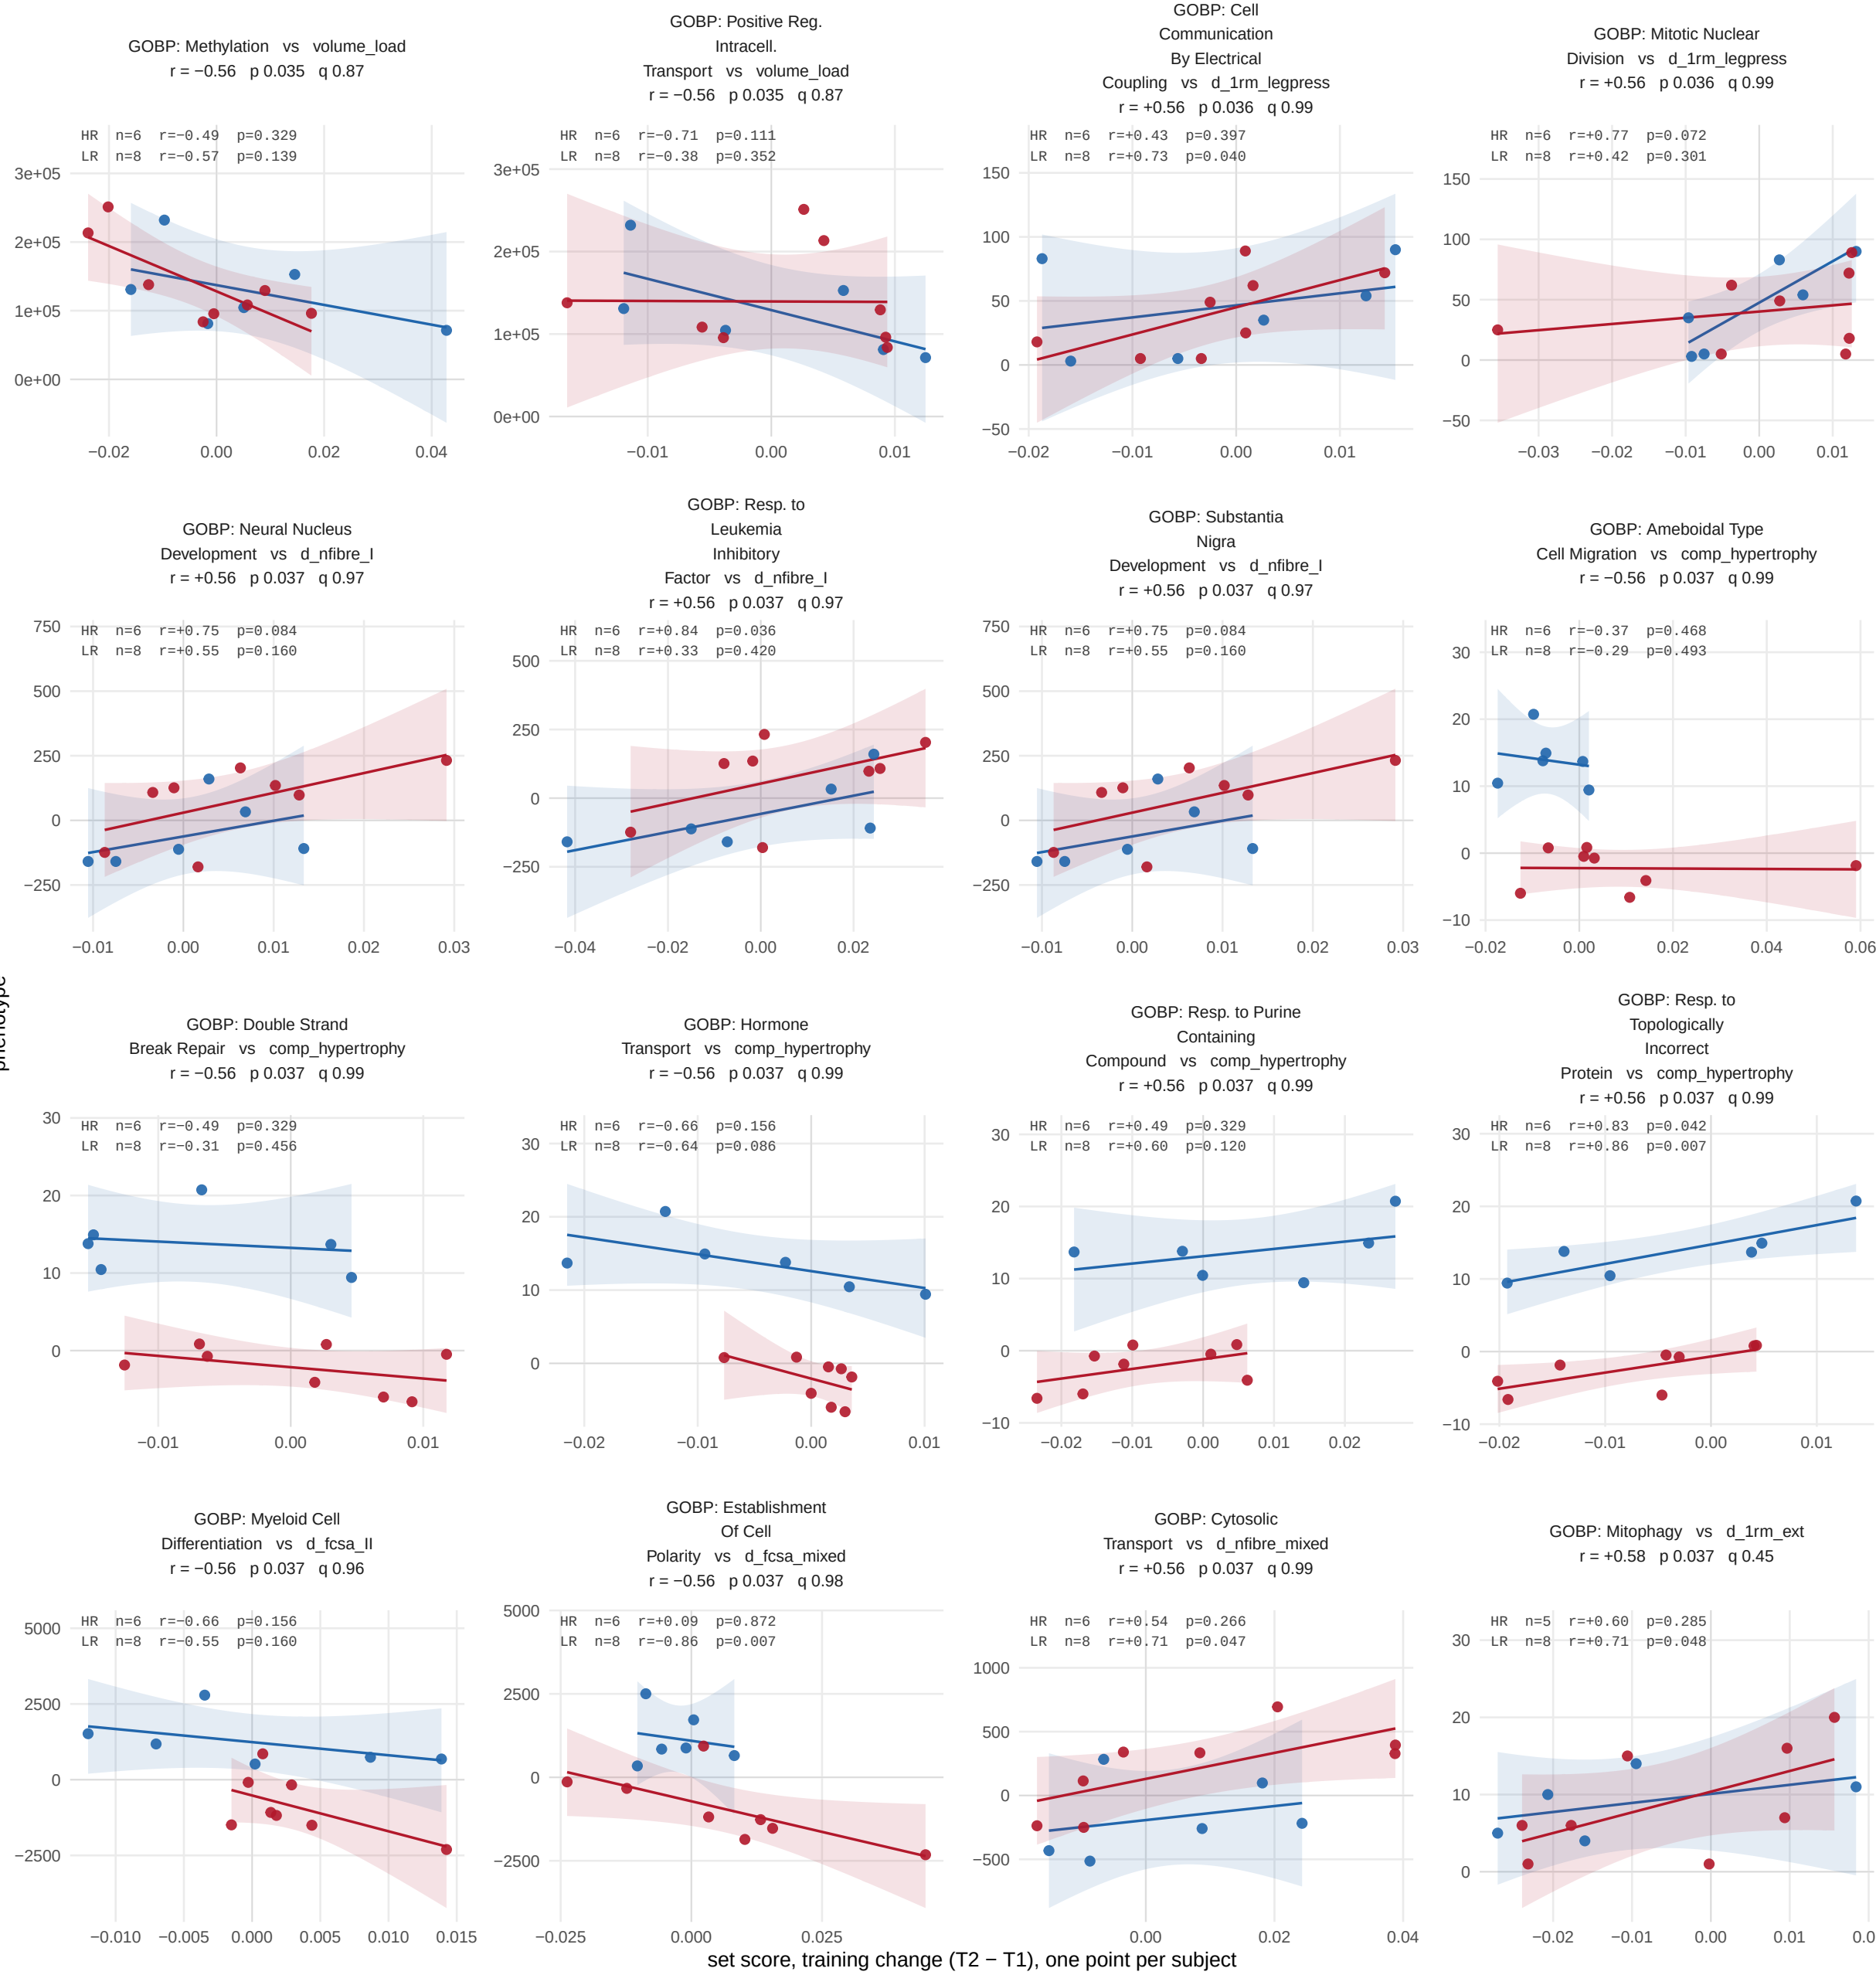


All 518 set-outcome pairs reaching nominal p, by collection then p. Lines are fitted within each arm; the header r is the pooled correlation, q from BH within collection, window and outcome. Nominal p, uncorrected. Each collection is read against its own expectation: GOBP 44.9 of 897, GO_Slim 2.9 of 58, Hallmark 1.7 of 33, KEGG_Legacy 3.1 of 62, Reactome 16.4 of 328.

Set score against phenotype, training change (T2 – T1)

Spearman, subjects pooled across arms

HR LR

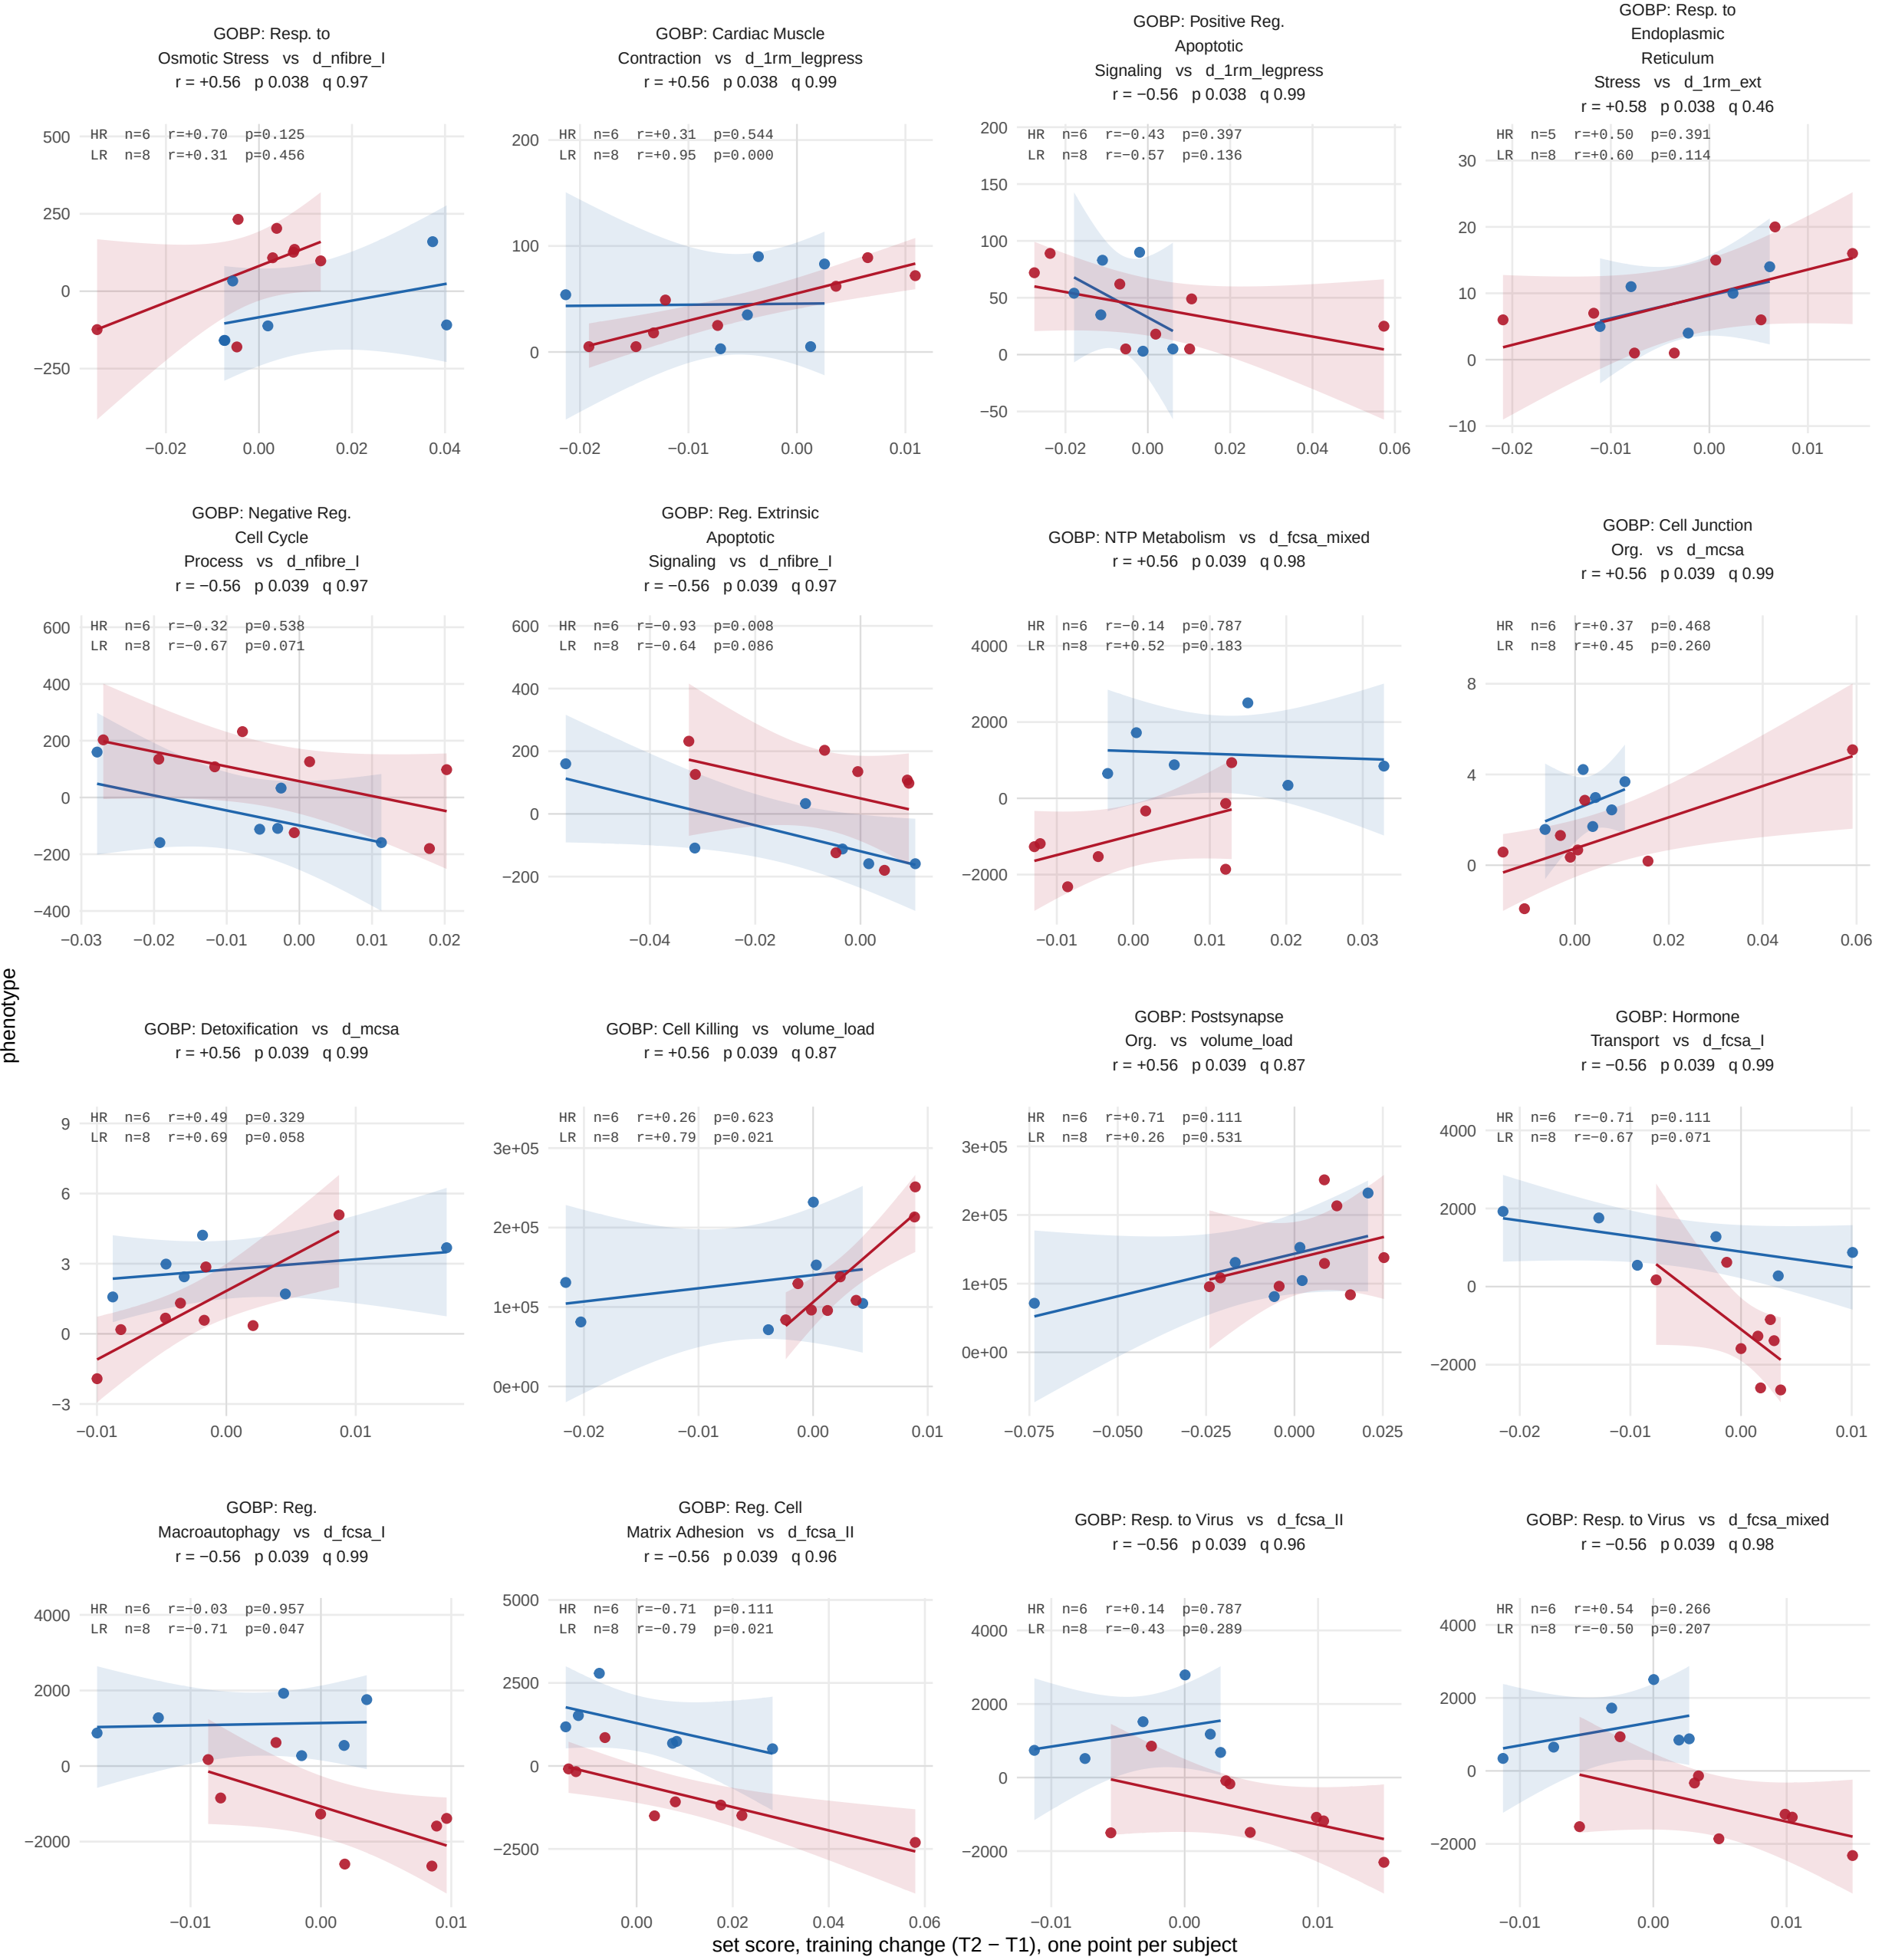


All 518 set-outcome pairs reaching nominal p, by collection then p. Lines are fitted within each arm; the header r is the pooled correlation, q from BH within collection, window and outcome. Nominal p, uncorrected. Each collection is read against its own expectation: GOBP 44.9 of 897, GO_Slim 2.9 of 58, Hallmark 1.7 of 33, KEGG_Legacy 3.1 of 62, Reactome 16.4 of 328.

Set score against phenotype, training change (T2 – T1)

Spearman, subjects pooled across arms



HR LR

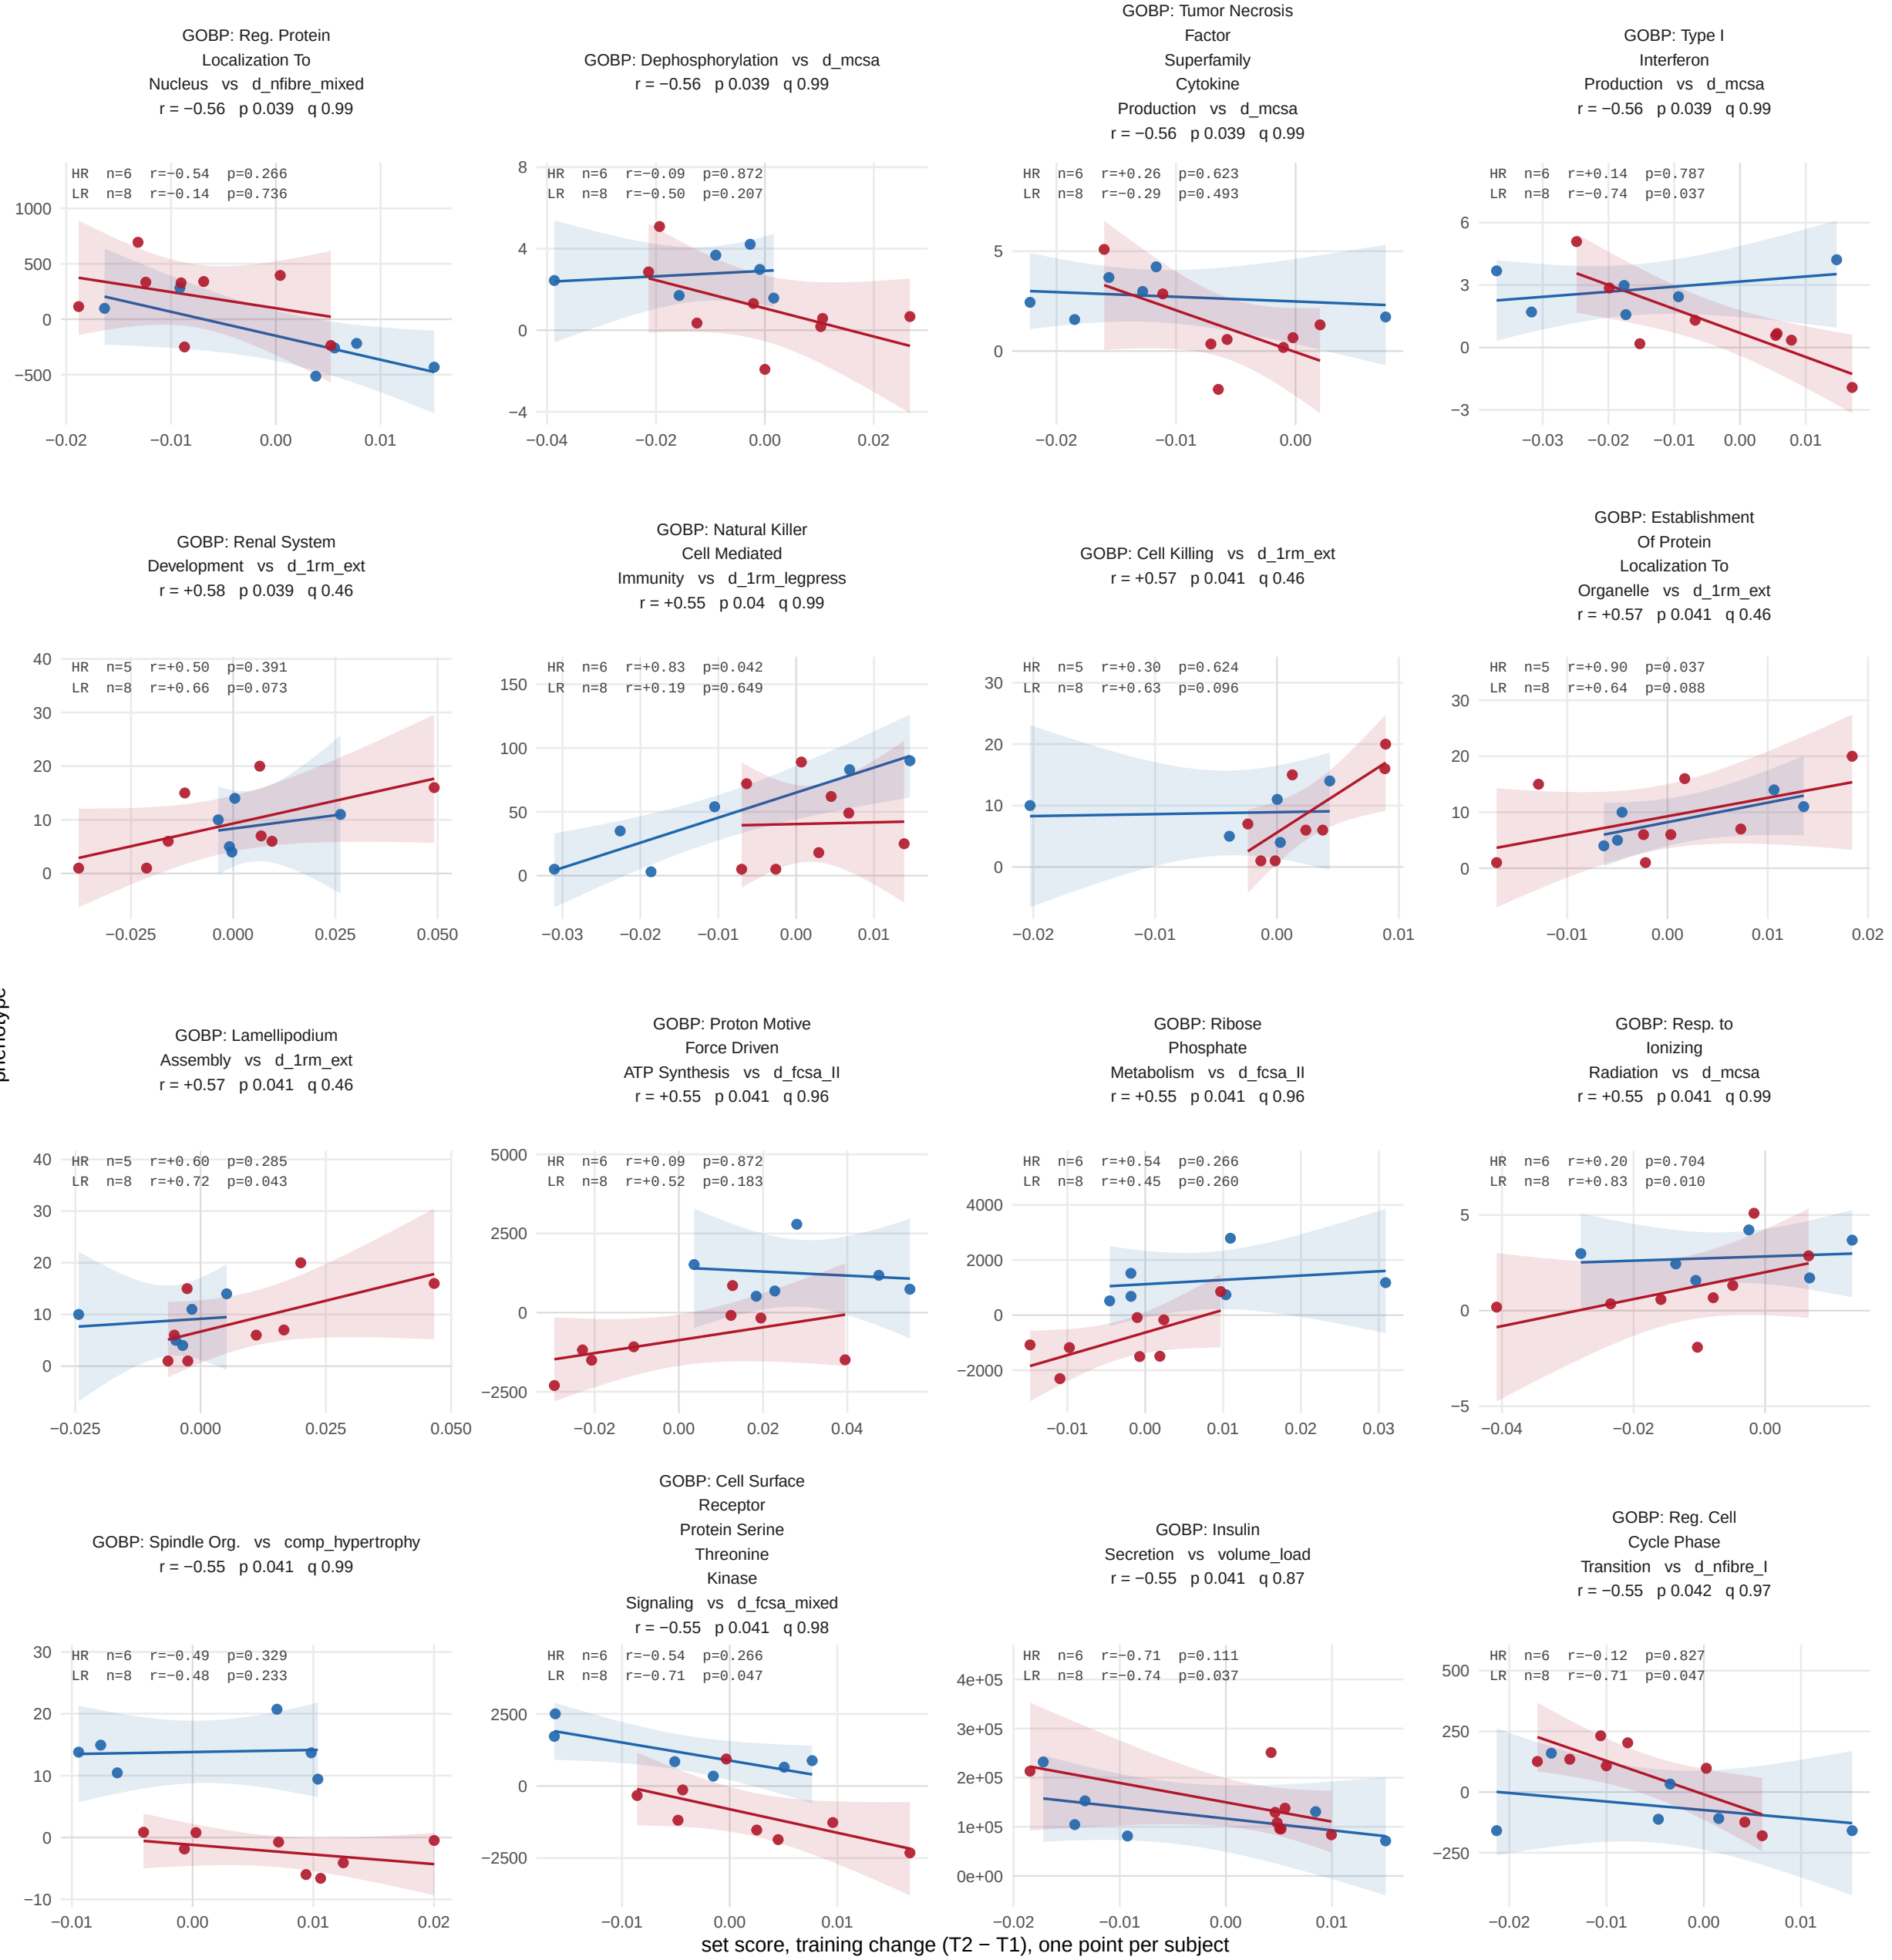

All 518 set–outcome pairs reaching nominal p, by collection then p. Lines are fitted within each arm; the header r is the pooled correlation, q from BH within collection, window and outcome. Nominal p, uncorrected. Each collection is read against its own expectation: GOBP 44.9 of 897, GO_Slim 2.9 of 58, Hallmark 1.7 of 33, KEGG_Legacy 3.1 of 62, Reactome 16.4 of 328.

Set score against phenotype, training change (T2 – T1)



Spearman, subjects pooled across arms

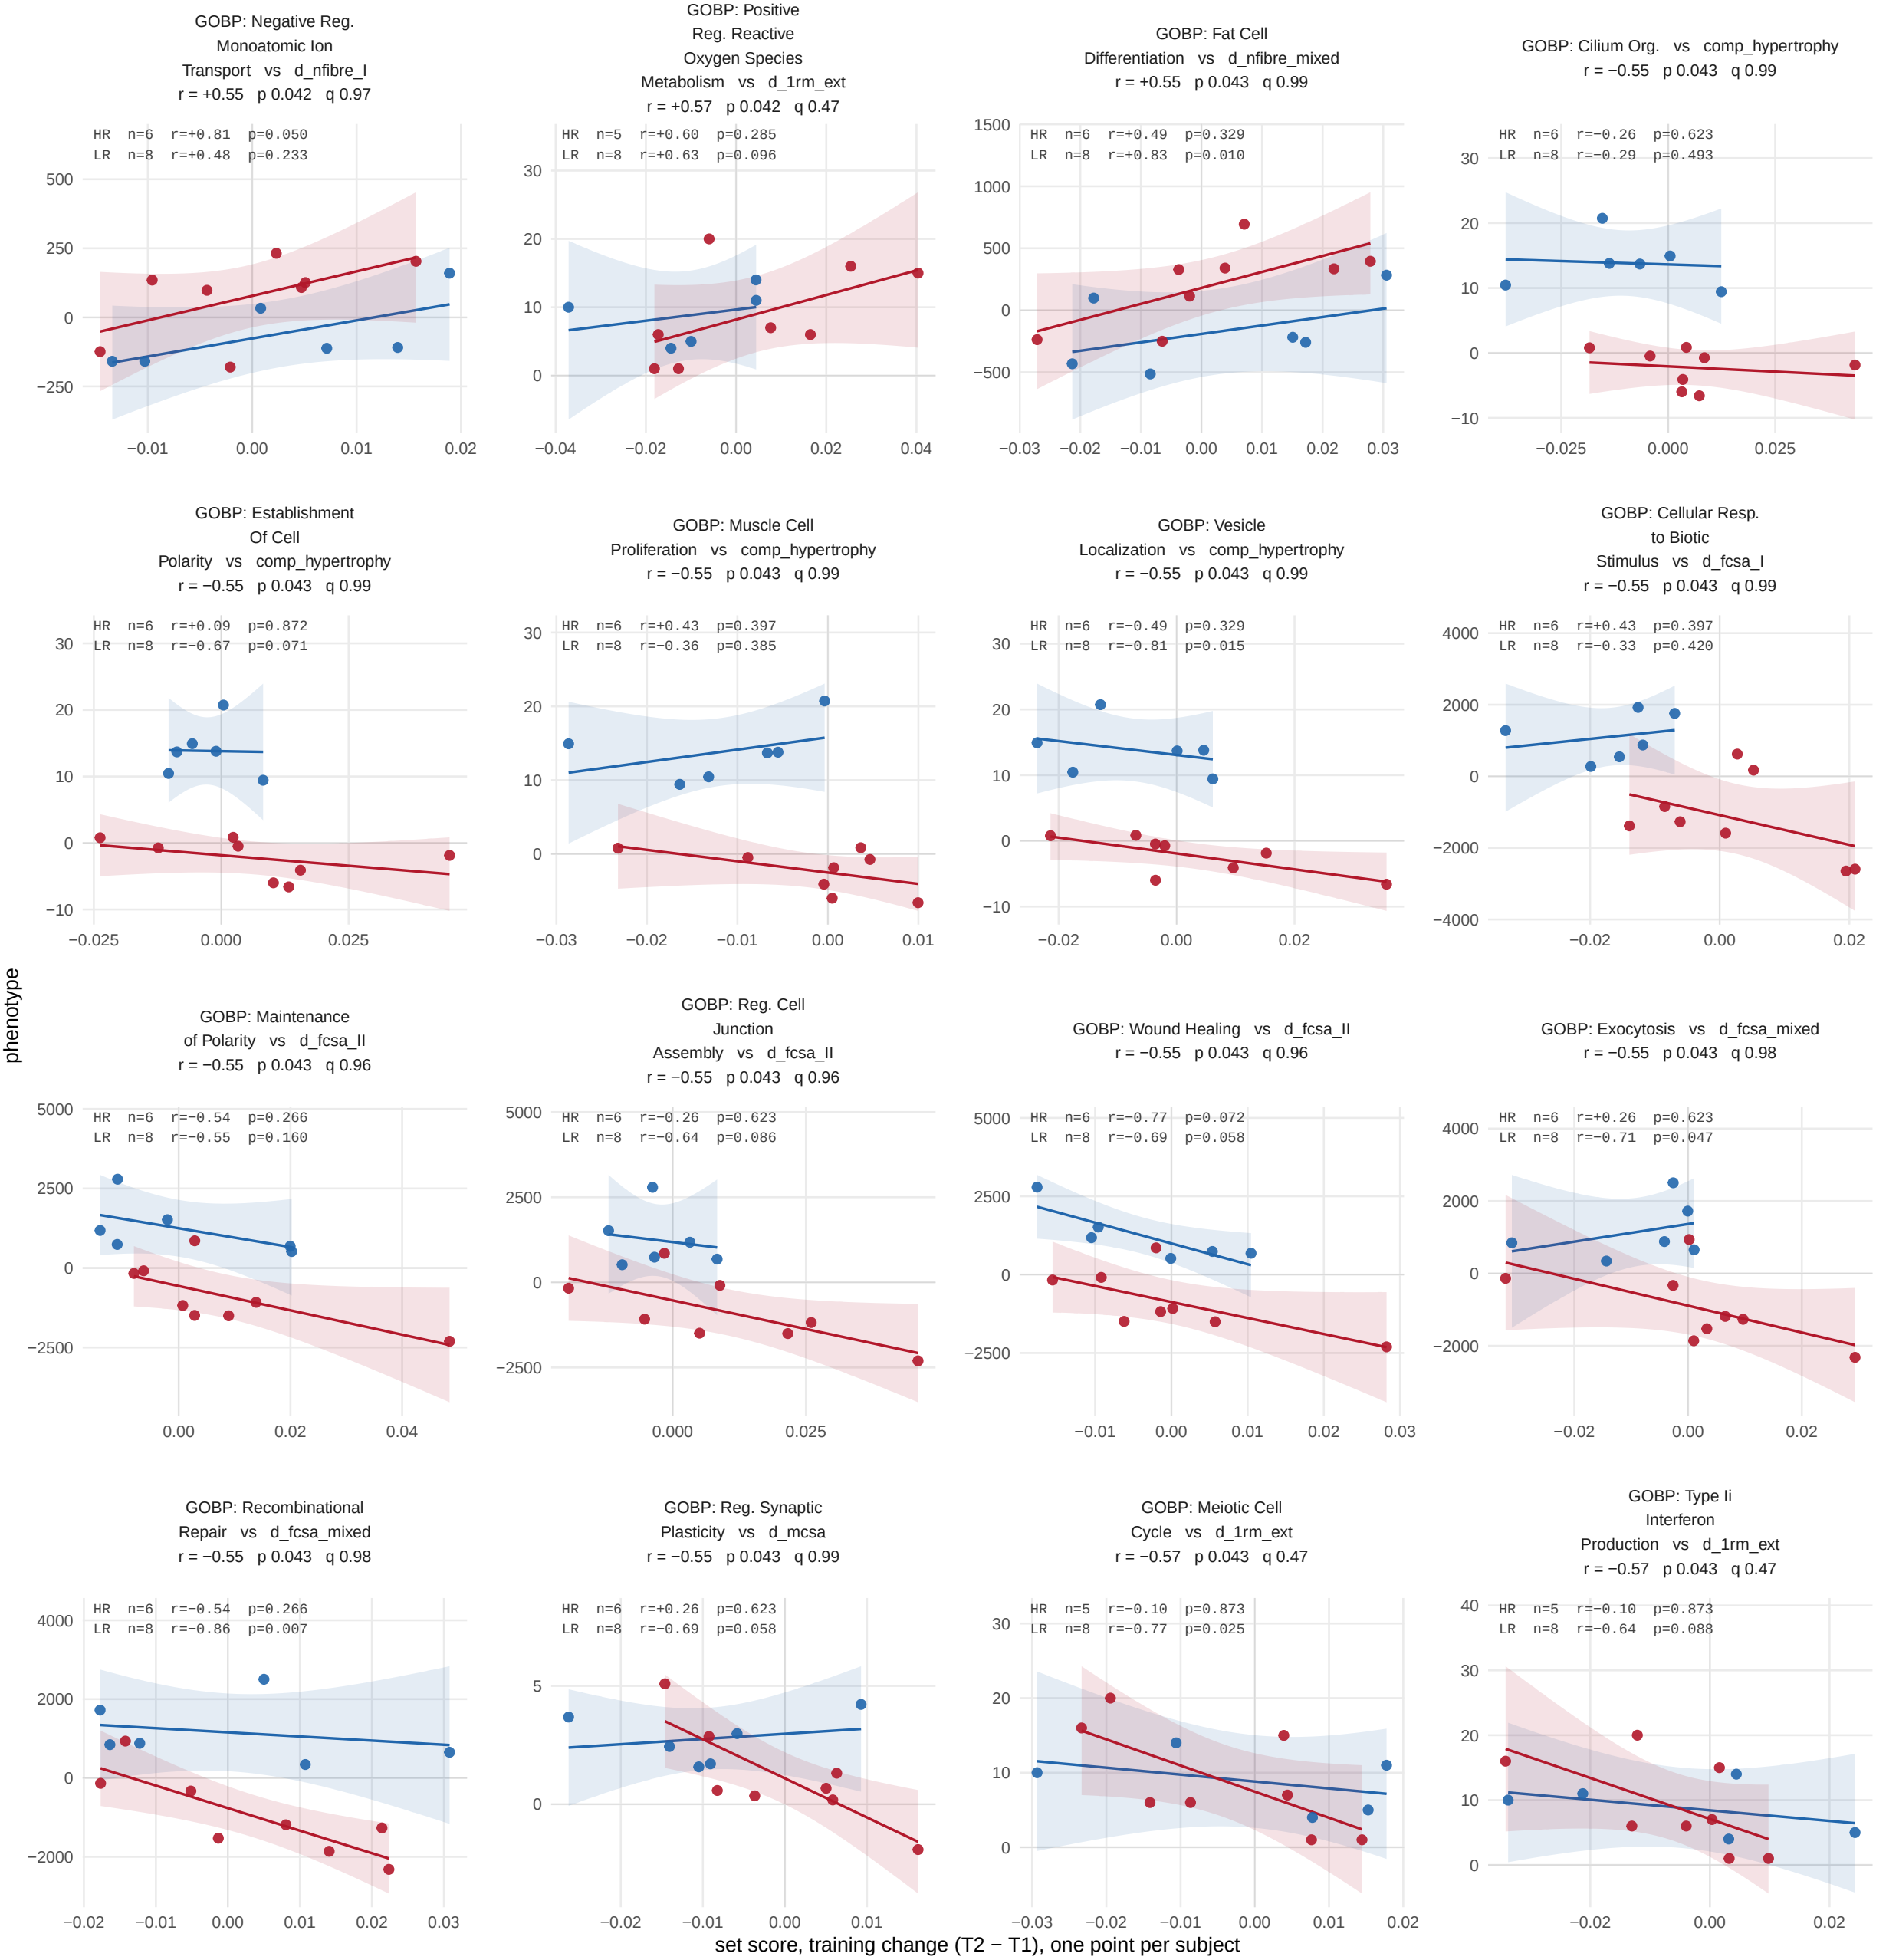

All 518 set-outcome pairs reaching nominal p, by collection then p. Lines are fitted within each arm; the header r is the pooled correlation, q from BH within collection, window and outcome. Nominal p, uncorrected. Each collection is read against its own expectation: GOBP 44.9 of 897, GO_Slim 2.9 of 58, Hallmark 1.7 of 33, KEGG_Legacy 3.1 of 62, Reactome 16.4 of 328.

Set score against phenotype, training change (T2 – T1)

Spearman, subjects pooled across arms

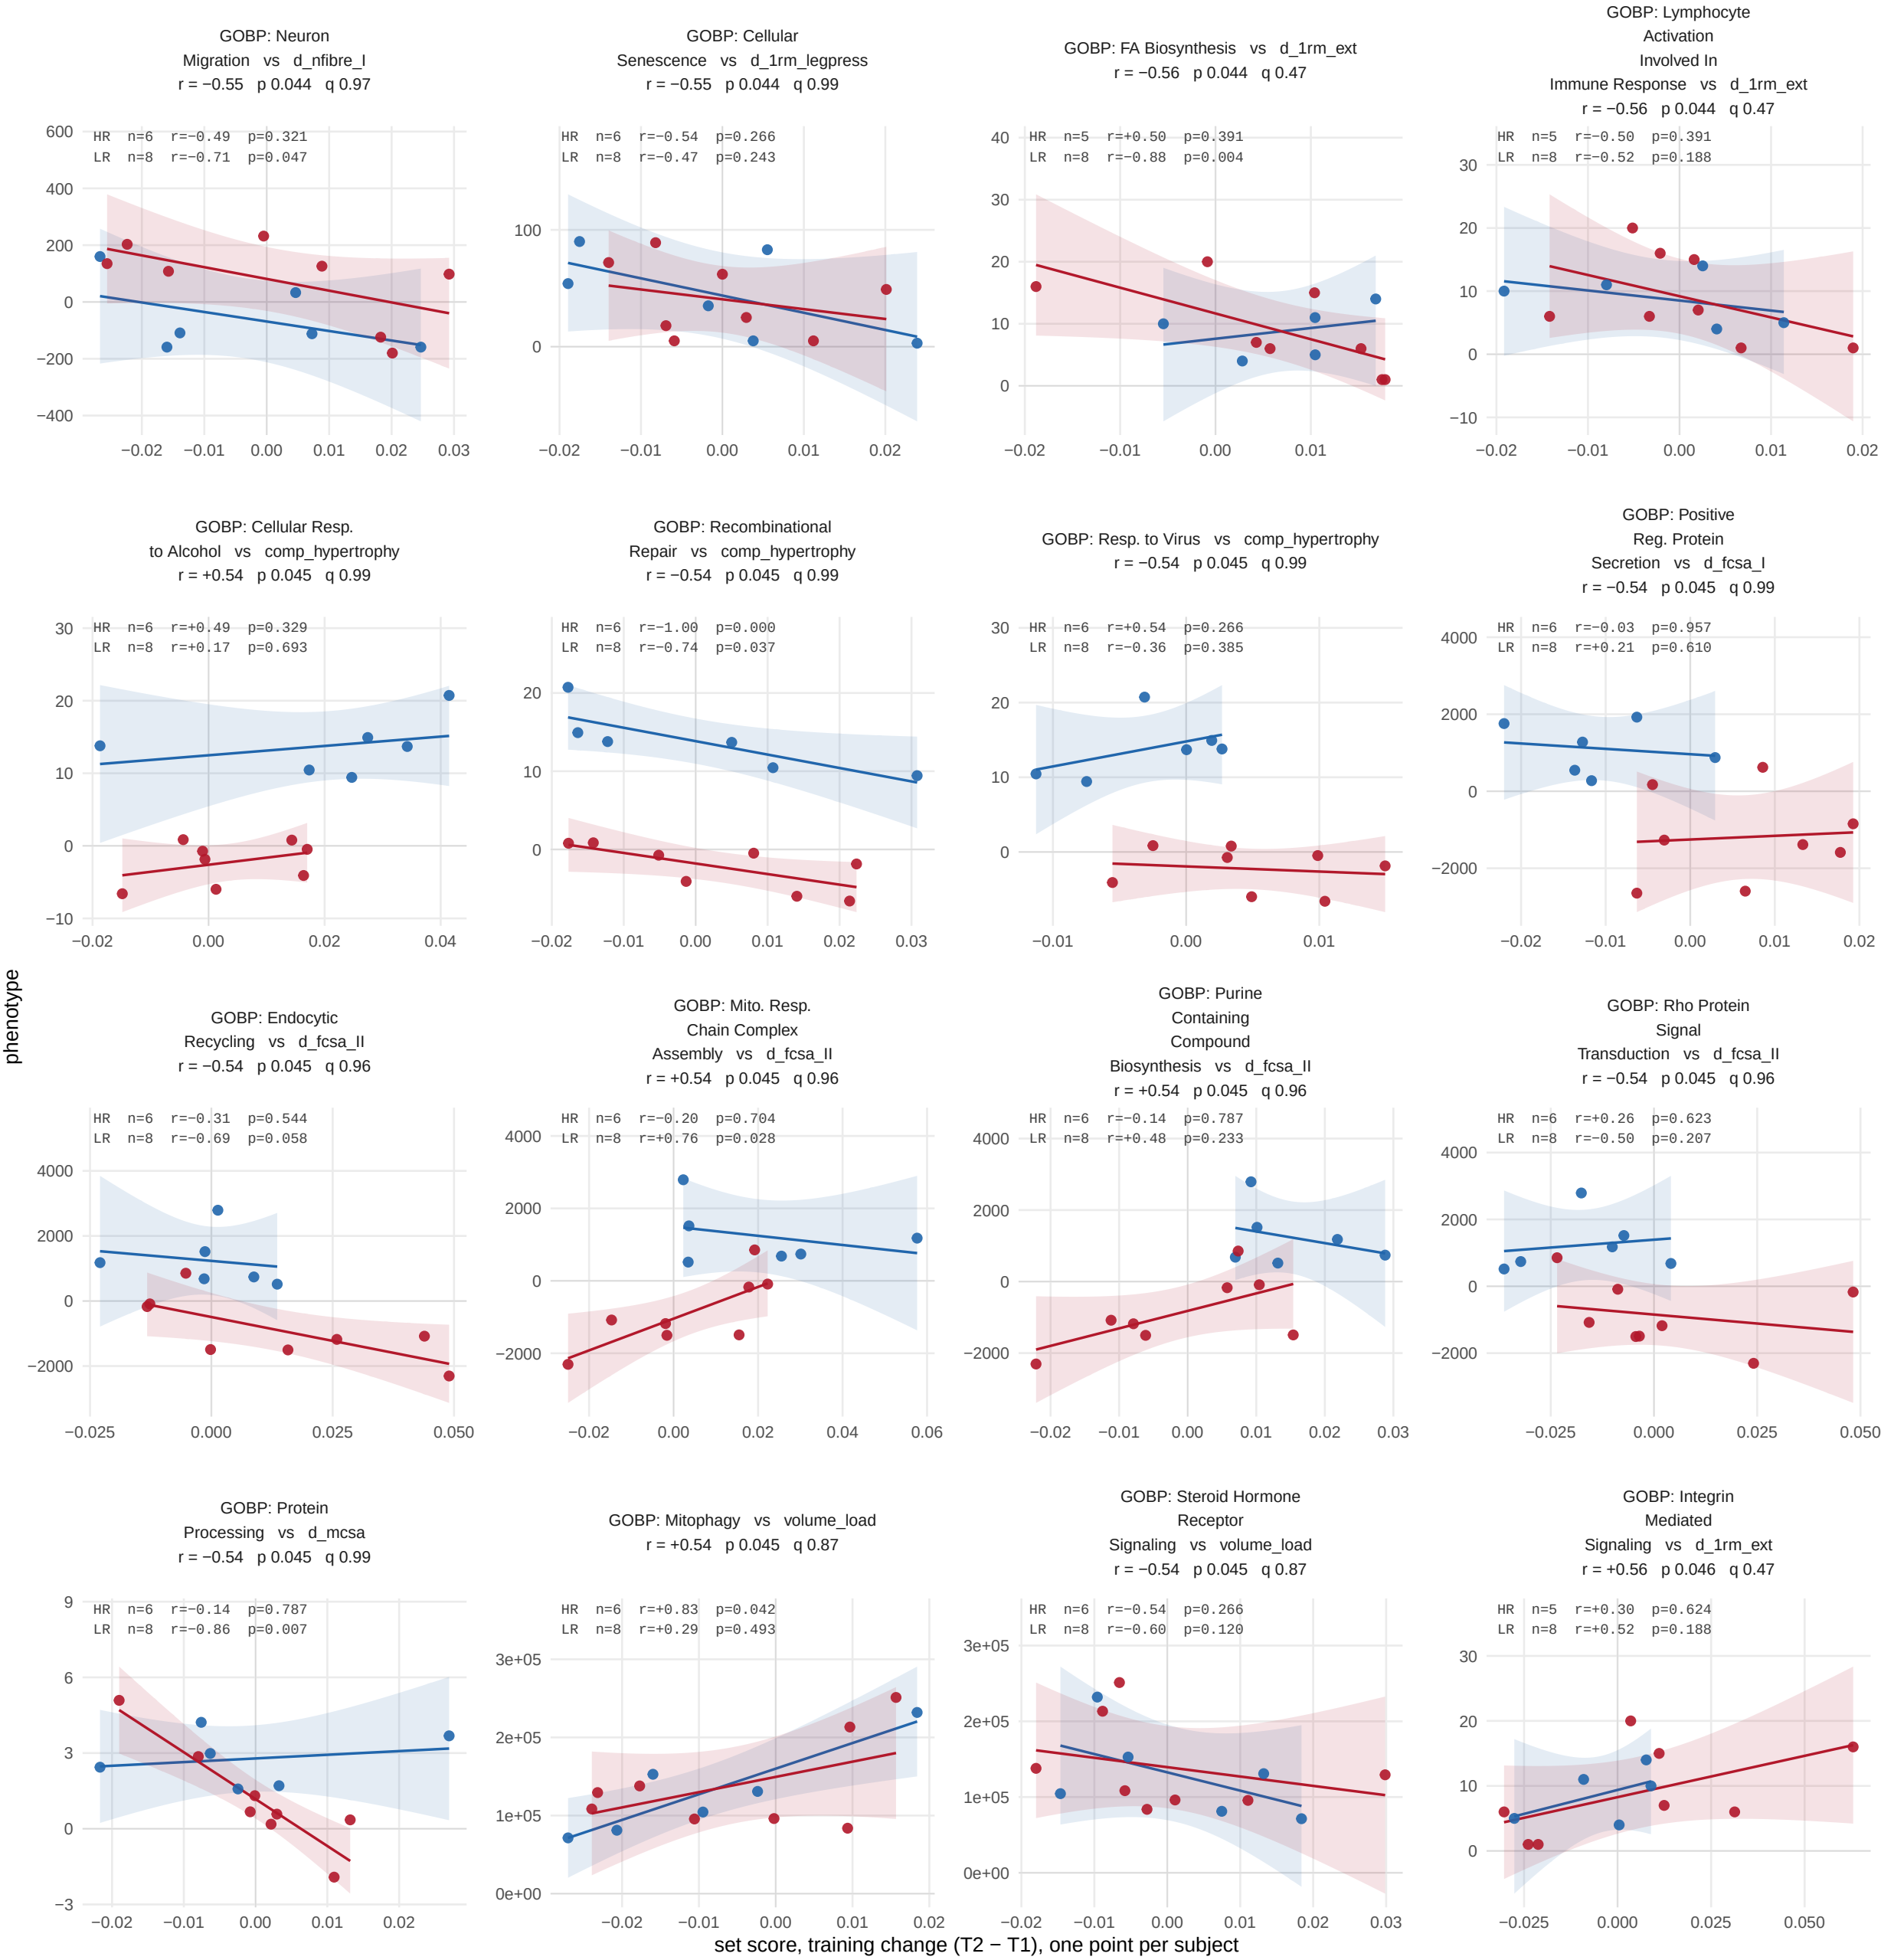


All 518 set-outcome pairs reaching nominal p, by collection then p. Lines are fitted within each arm; the header r is the pooled correlation, q from BH within collection, window and outcome. Nominal p, uncorrected. Each collection is read against its own expectation: GOBP 44.9 of 897, GO_Slim 2.9 of 58, Hallmark 1.7 of 33, KEGG_Legacy 3.1 of 62, Reactome 16.4 of 328.

Set score against phenotype, training change (T2 – T1)

Spearman, subjects pooled across arms

HR LR

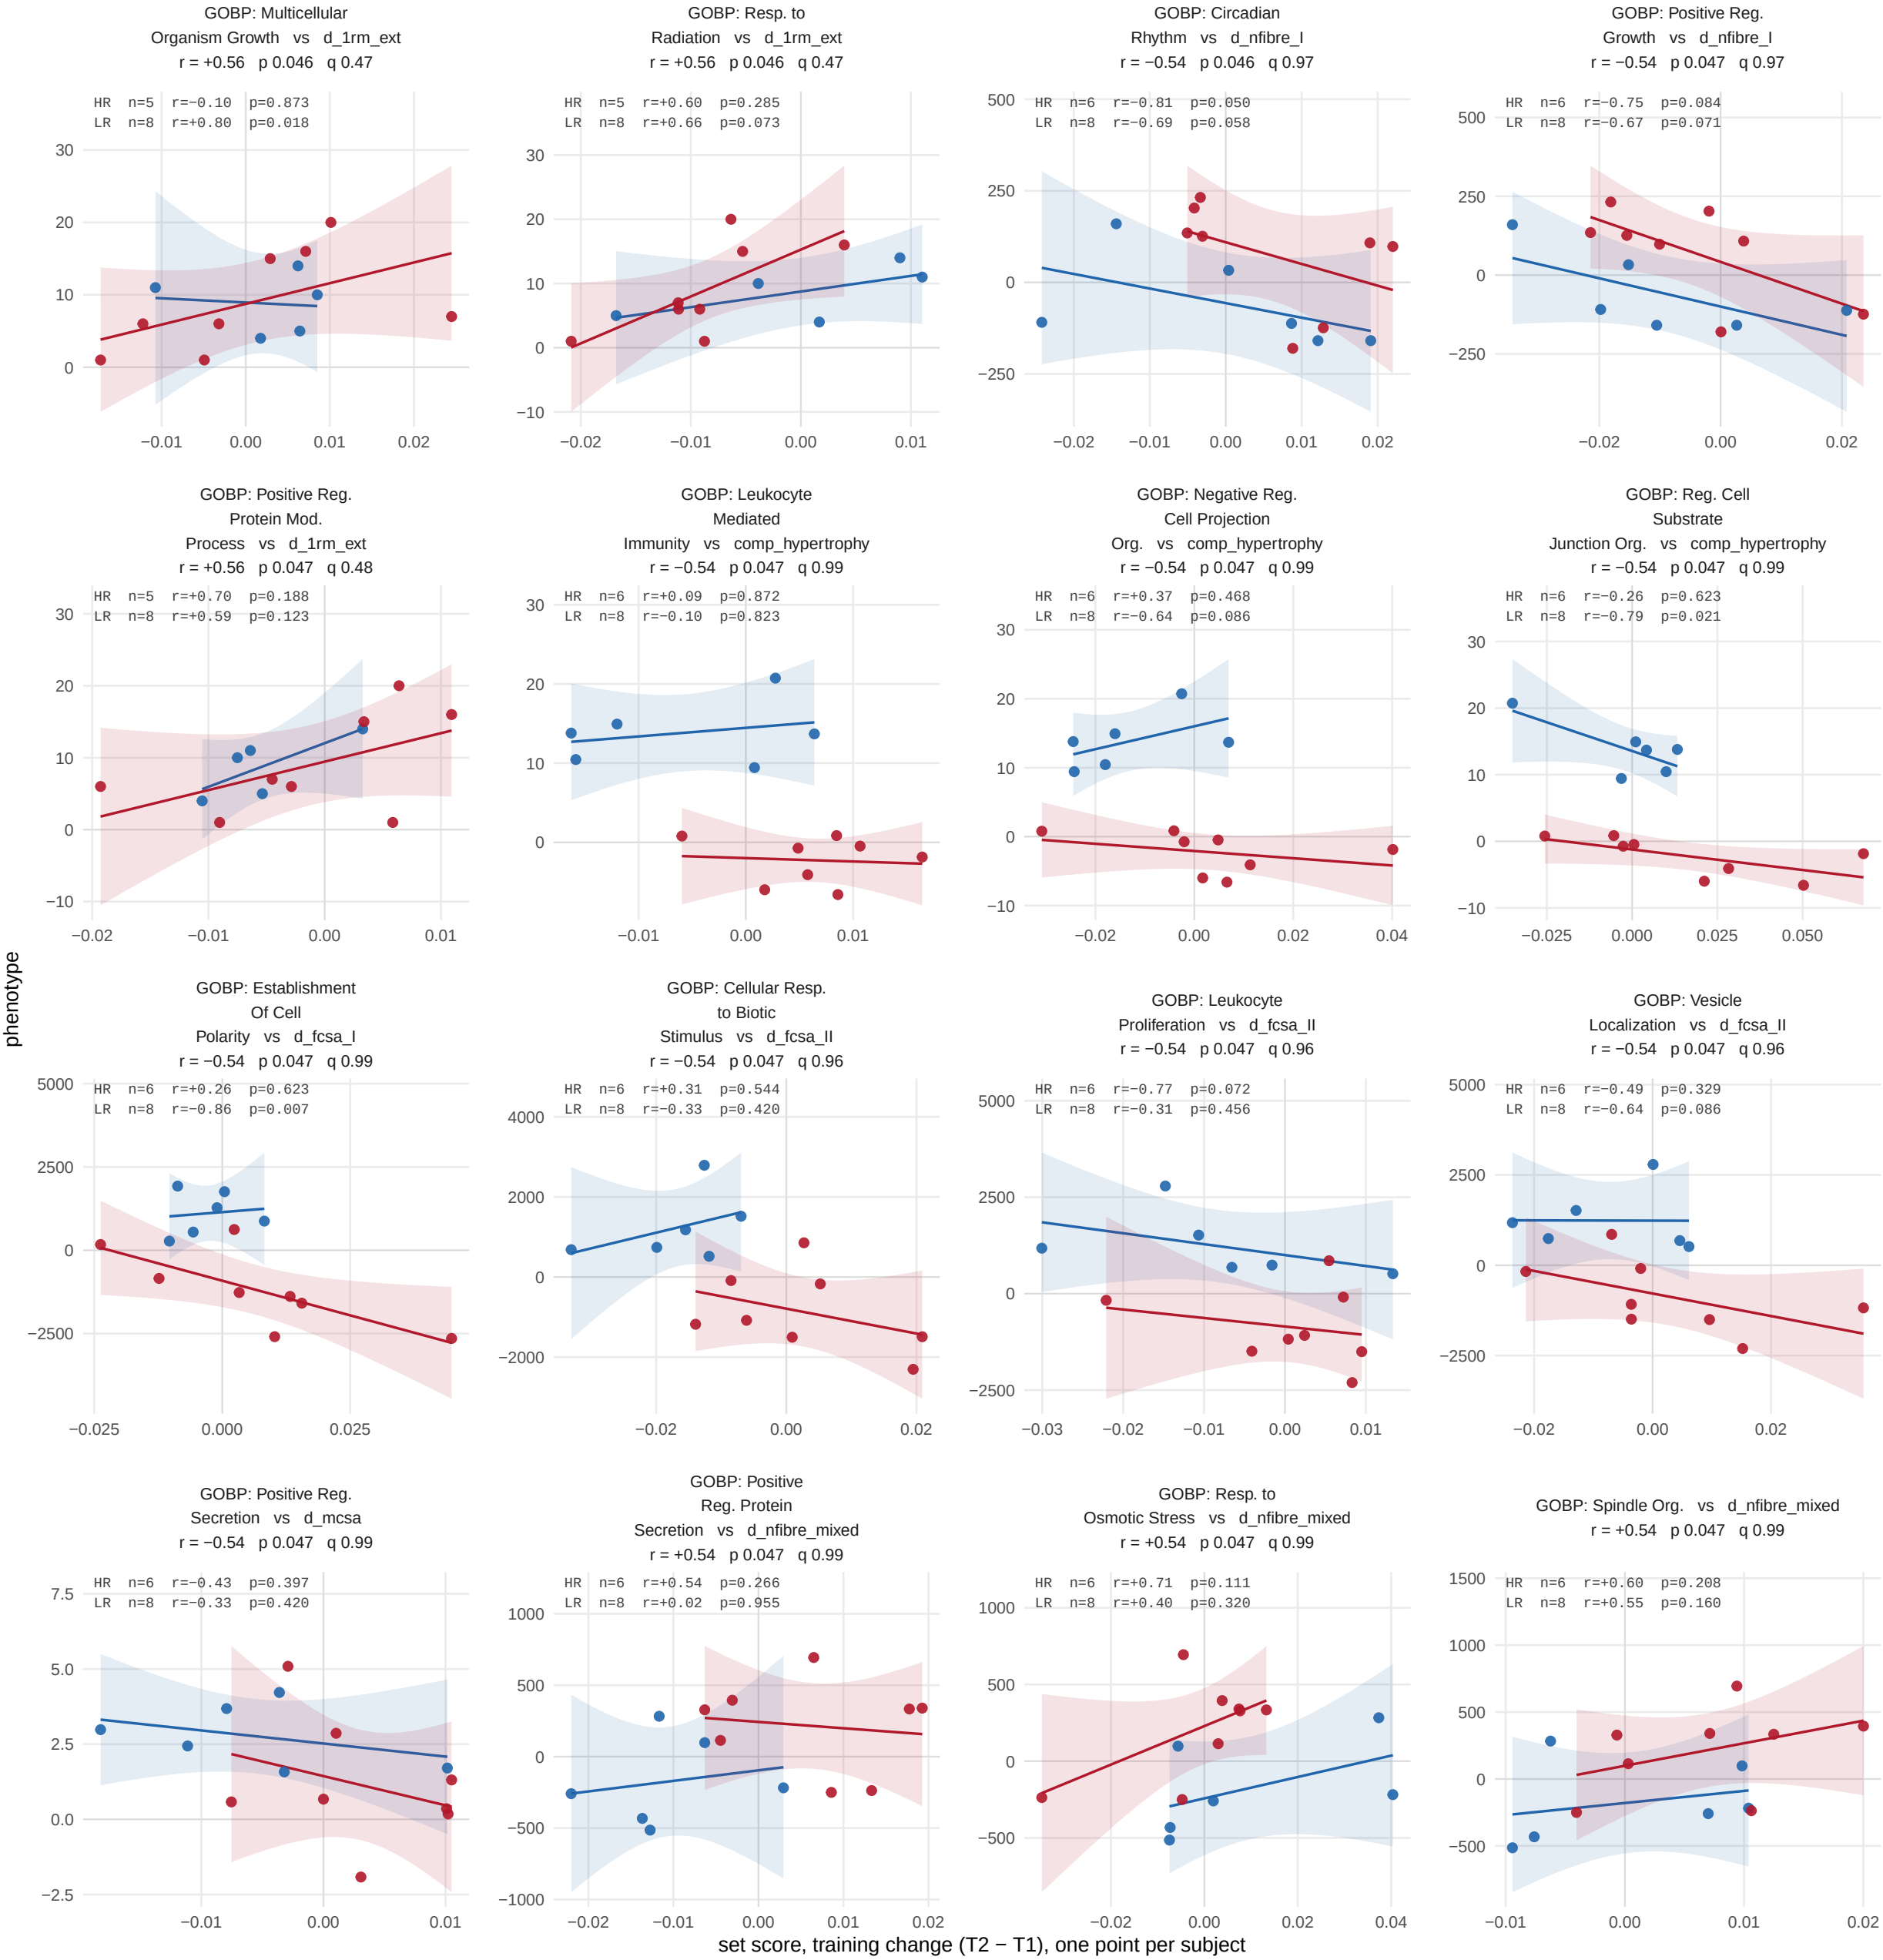


All 518 set-outcome pairs reaching nominal p, by collection then p. Lines are fitted within each arm; the header r is the pooled correlation, q from BH within collection, window and outcome. Nominal p, uncorrected. Each collection is read against its own expectation: GOBP 44.9 of 897, GO_Slim 2.9 of 58, Hallmark 1.7 of 33, KEGG_Legacy 3.1 of 62, Reactome 16.4 of 328.

Set score against phenotype, training change (T2 – T1)

Spearman, subjects pooled across arms

HR LR

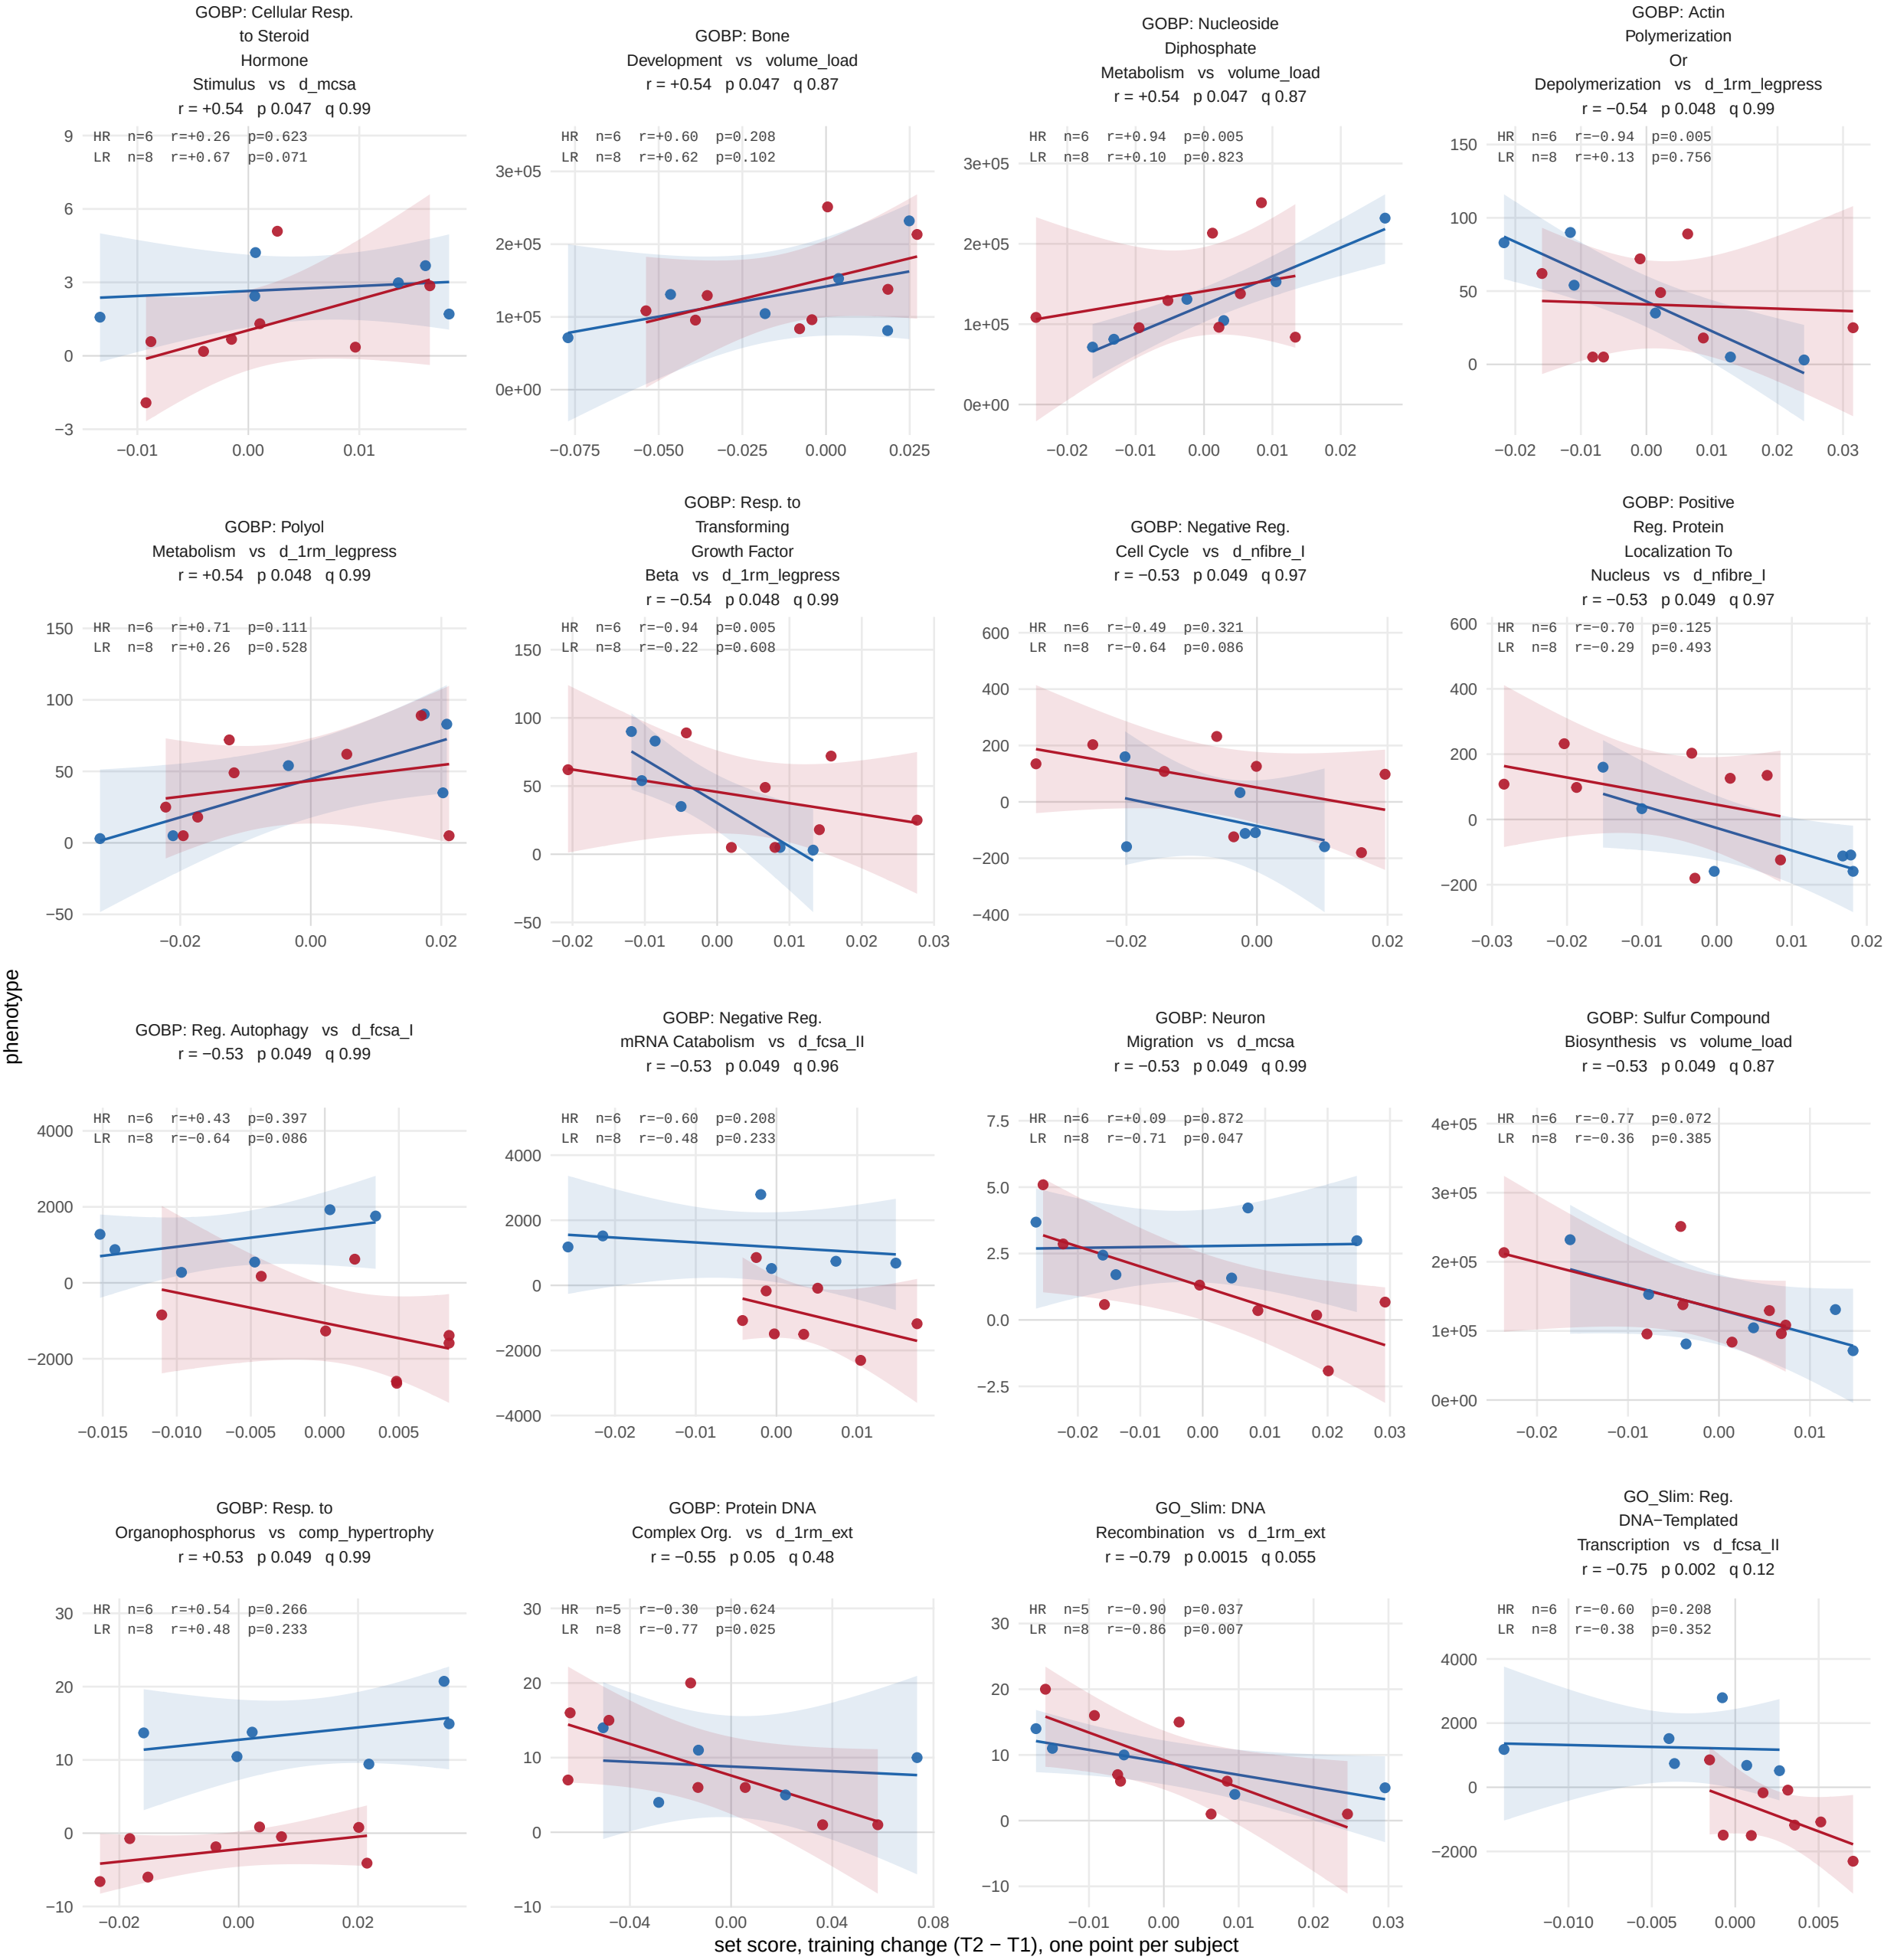

All 518 set-outcome pairs reaching nominal p, by collection then p. Lines are fitted within each arm; the header r is the pooled correlation, q from BH within collection, window and outcome. Nominal p, uncorrected. Each collection is read against its own expectation: GOBP 44.9 of 897, GO_Slim 2.9 of 58, Hallmark 1.7 of 33, KEGG_Legacy 3.1 of 62, Reactome 16.4 of 328.

Set score against phenotype, training change (T2 – T1)

Spearman, subjects pooled across arms

HR LR




All 518 set-outcome pairs reaching nominal p, by collection then p. Lines are fitted within each arm; the header r is the pooled correlation, q from BH within collection, window and outcome. Nominal p, uncorrected. Each collection is read against its own expectation: GOBP 44.9 of 897, GO_Slim 2.9 of 58, Hallmark 1.7 of 33, KEGG_Legacy 3.1 of 62, Reactome 16.4 of 328.

Set score against phenotype, training change (T2 – T1)

Spearman, subjects pooled across arms

HR LR

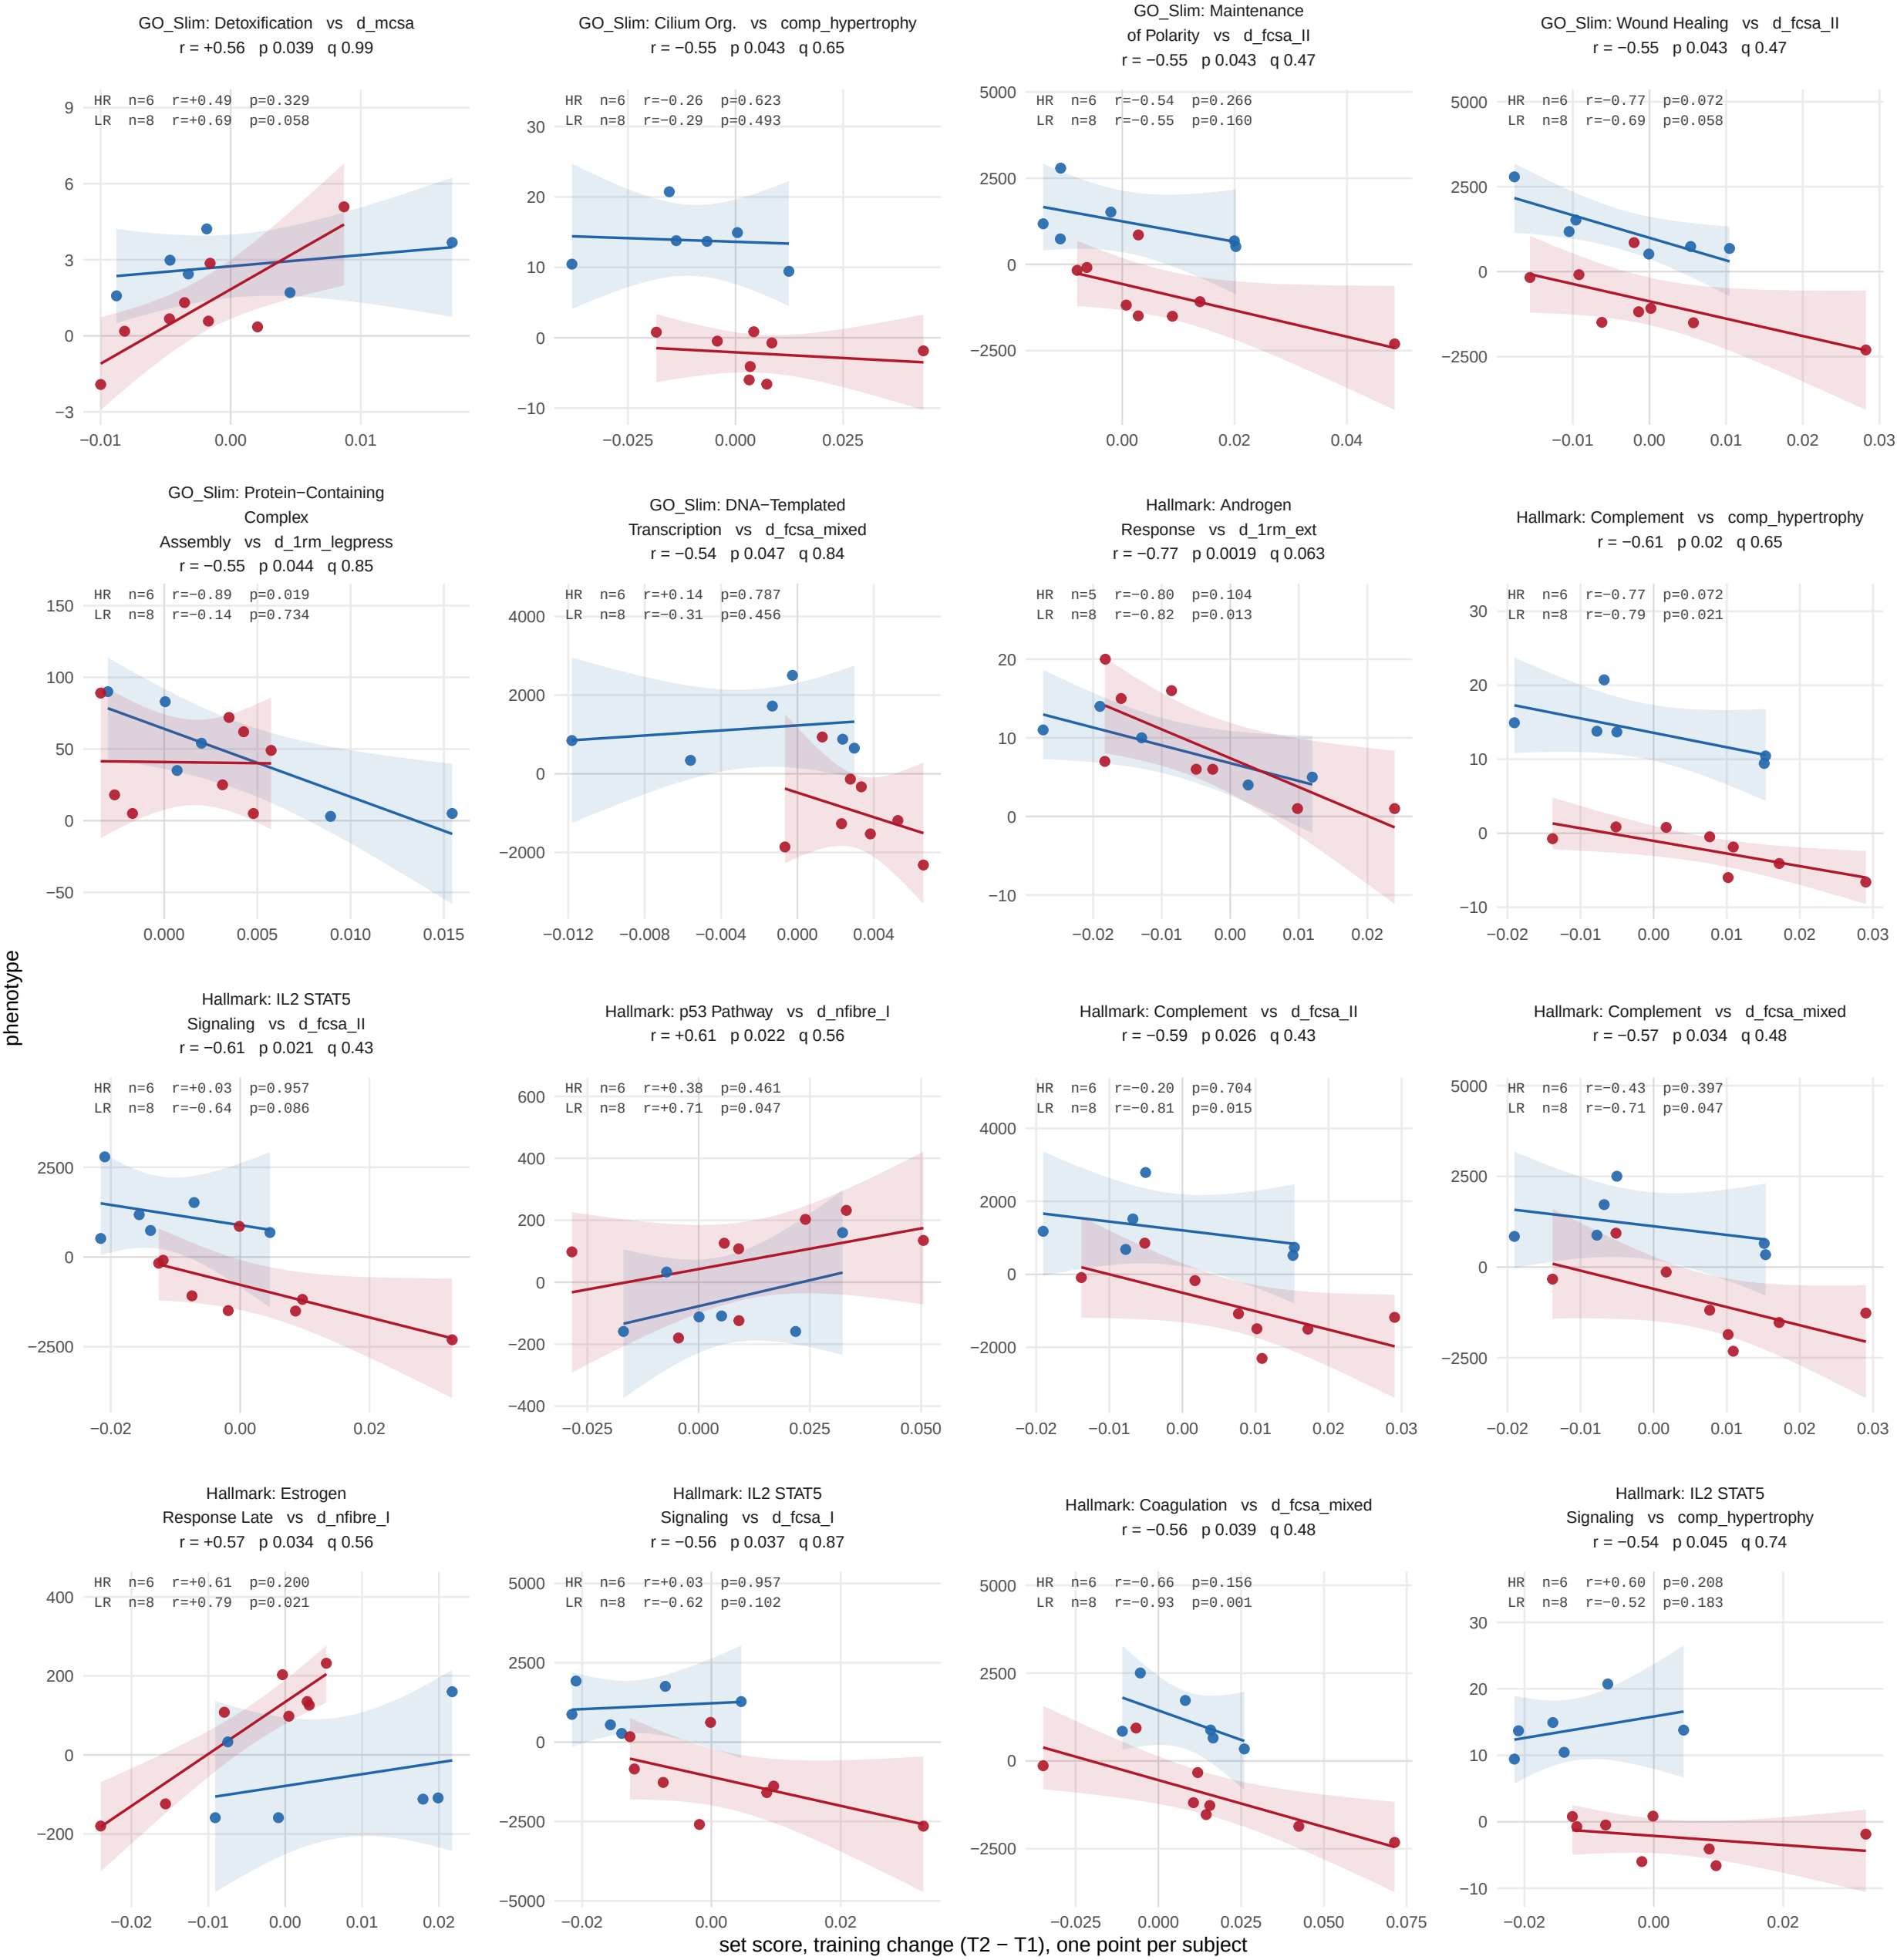


All 518 set-outcome pairs reaching nominal p, by collection then p. Lines are fitted within each arm; the header r is the pooled correlation, q from BH within collection, window and outcome. Nominal p, uncorrected. Each collection is read against its own expectation: GOBP 44.9 of 897, GO_Slim 2.9 of 58, Hallmark 1.7 of 33, KEGG_Legacy 3.1 of 62, Reactome 16.4 of 328.

Set score against phenotype, training change (T2 – T1)

Spearman, subjects pooled across arms

HR LR

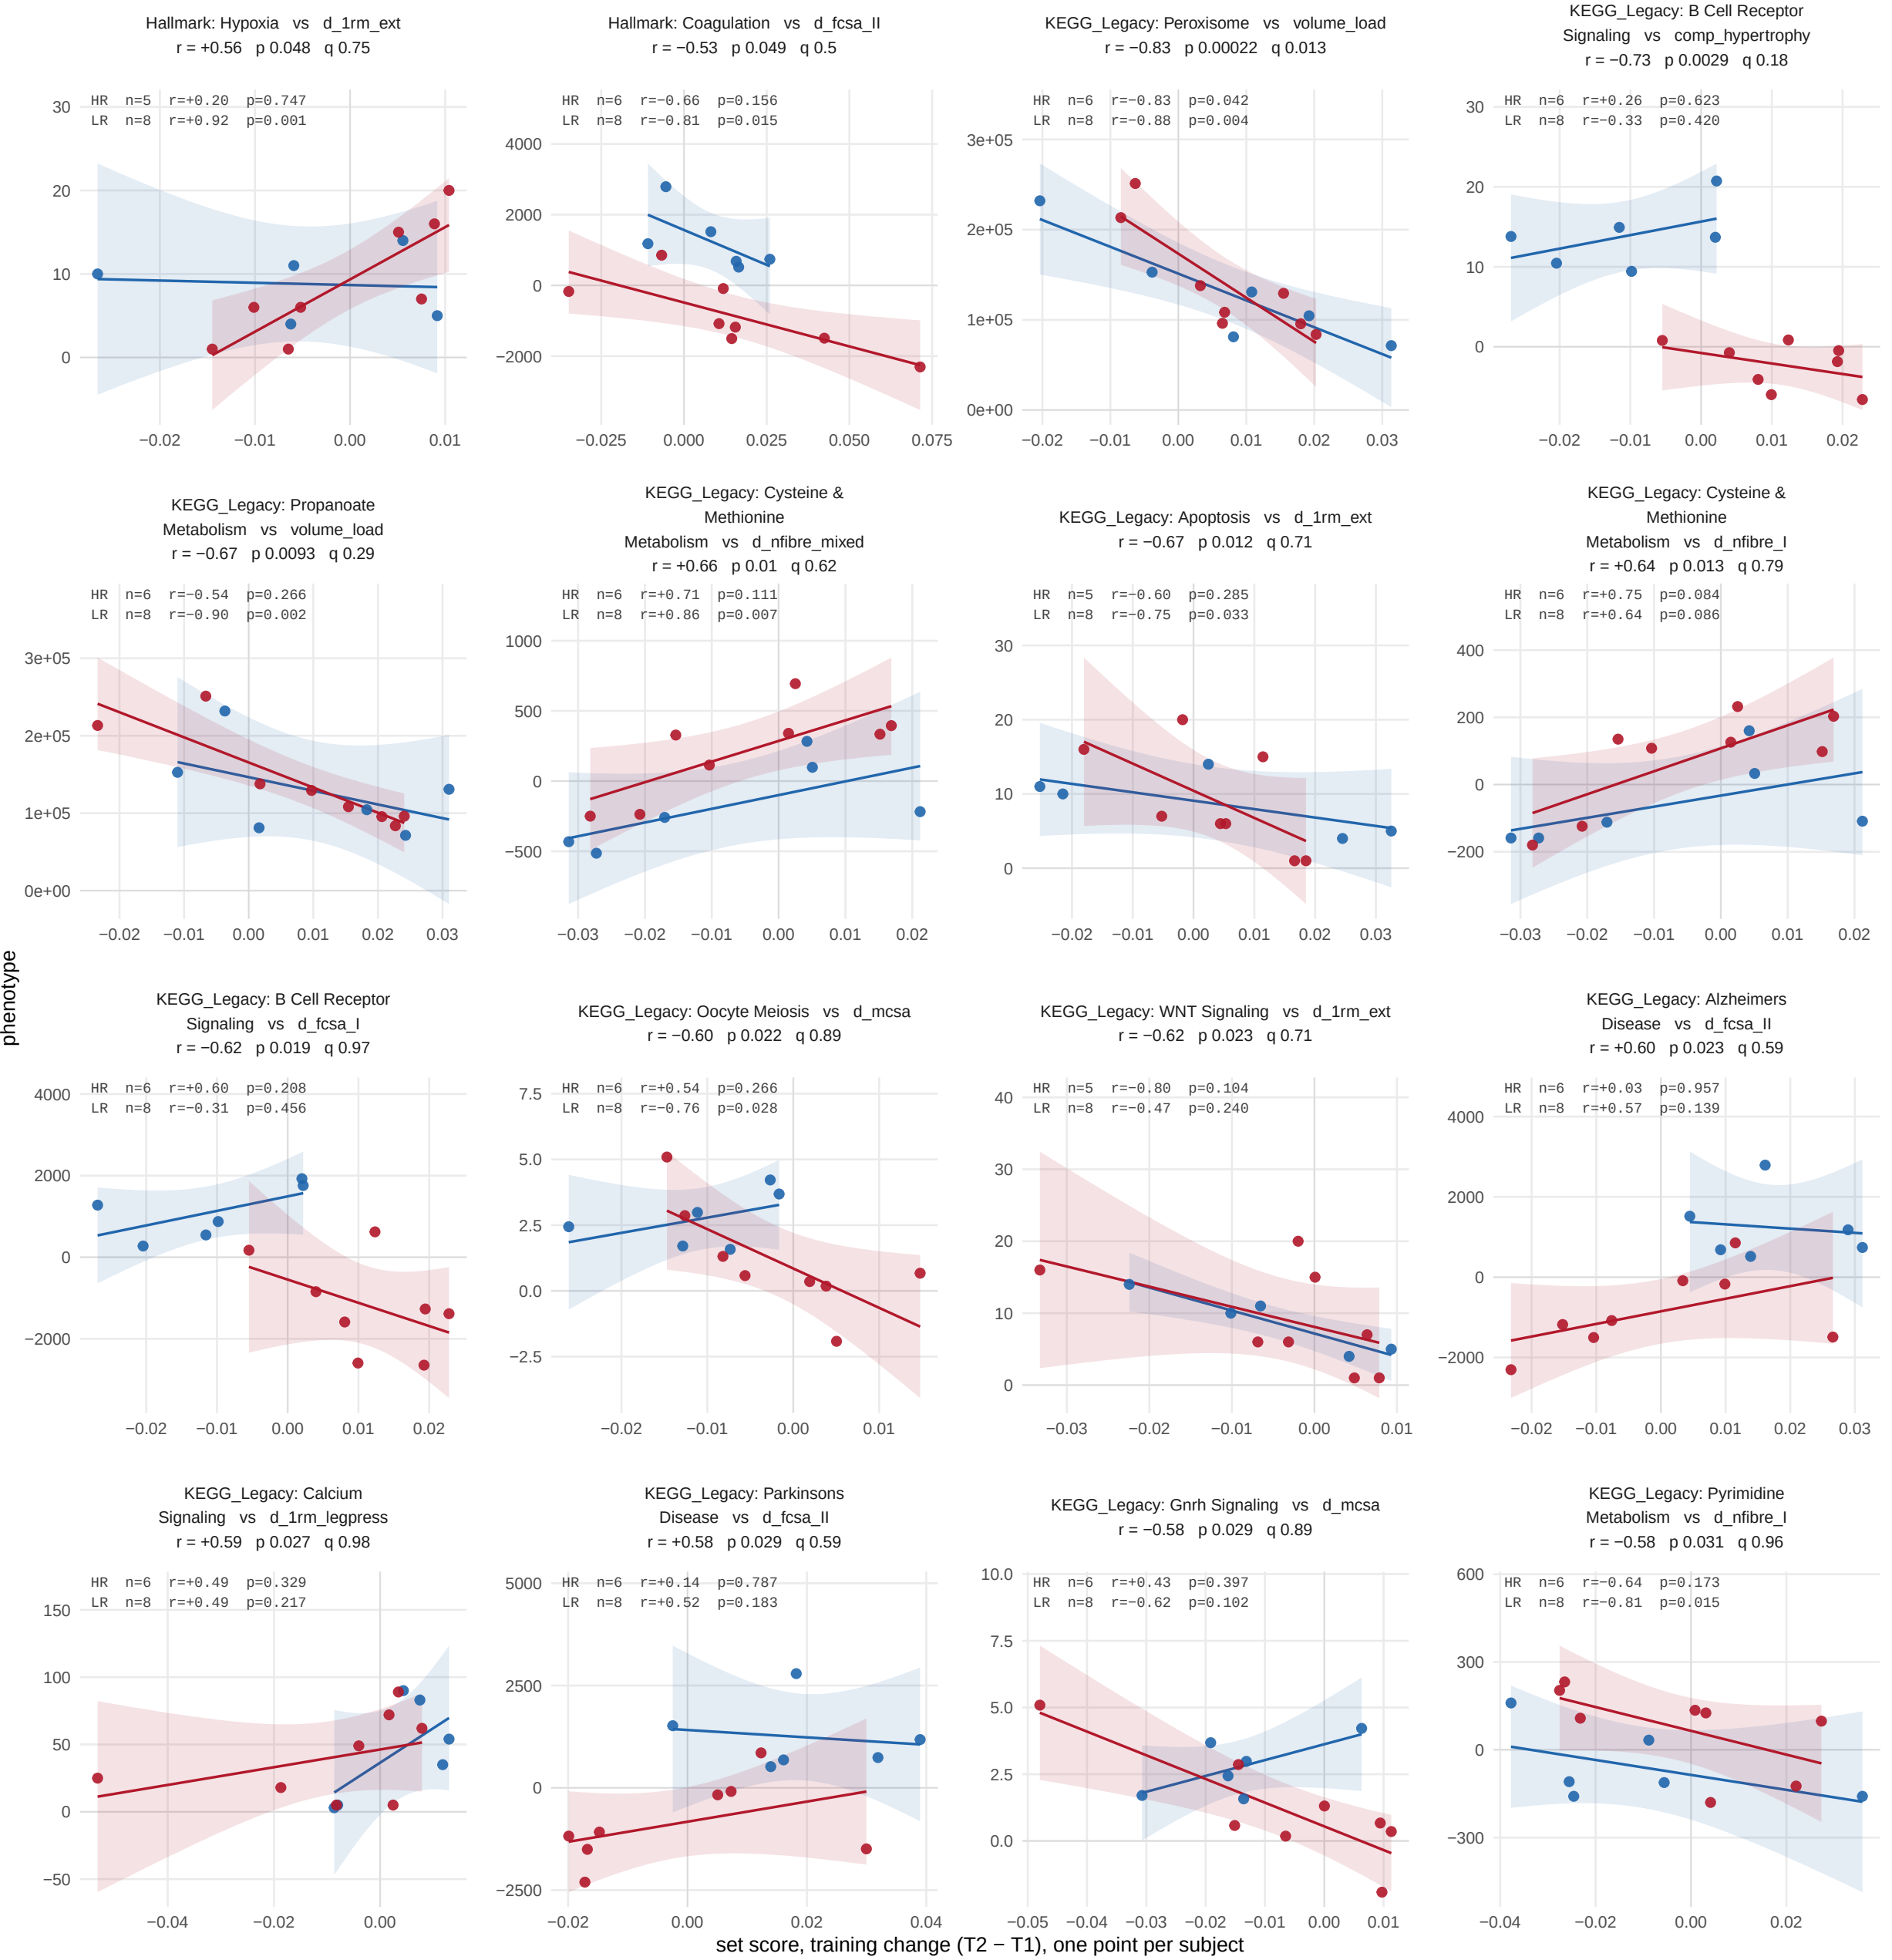


All 518 set-outcome pairs reaching nominal p, by collection then p. Lines are fitted within each arm; the header r is the pooled correlation, q from BH within collection, window and outcome. Nominal p, uncorrected. Each collection is read against its own expectation: GOBP 44.9 of 897, GO_Slim 2.9 of 58, Hallmark 1.7 of 33, KEGG_Legacy 3.1 of 62, Reactome 16.4 of 328.

Set score against phenotype, training change (T2 – T1)

Spearman, subjects pooled across arms

HR LR

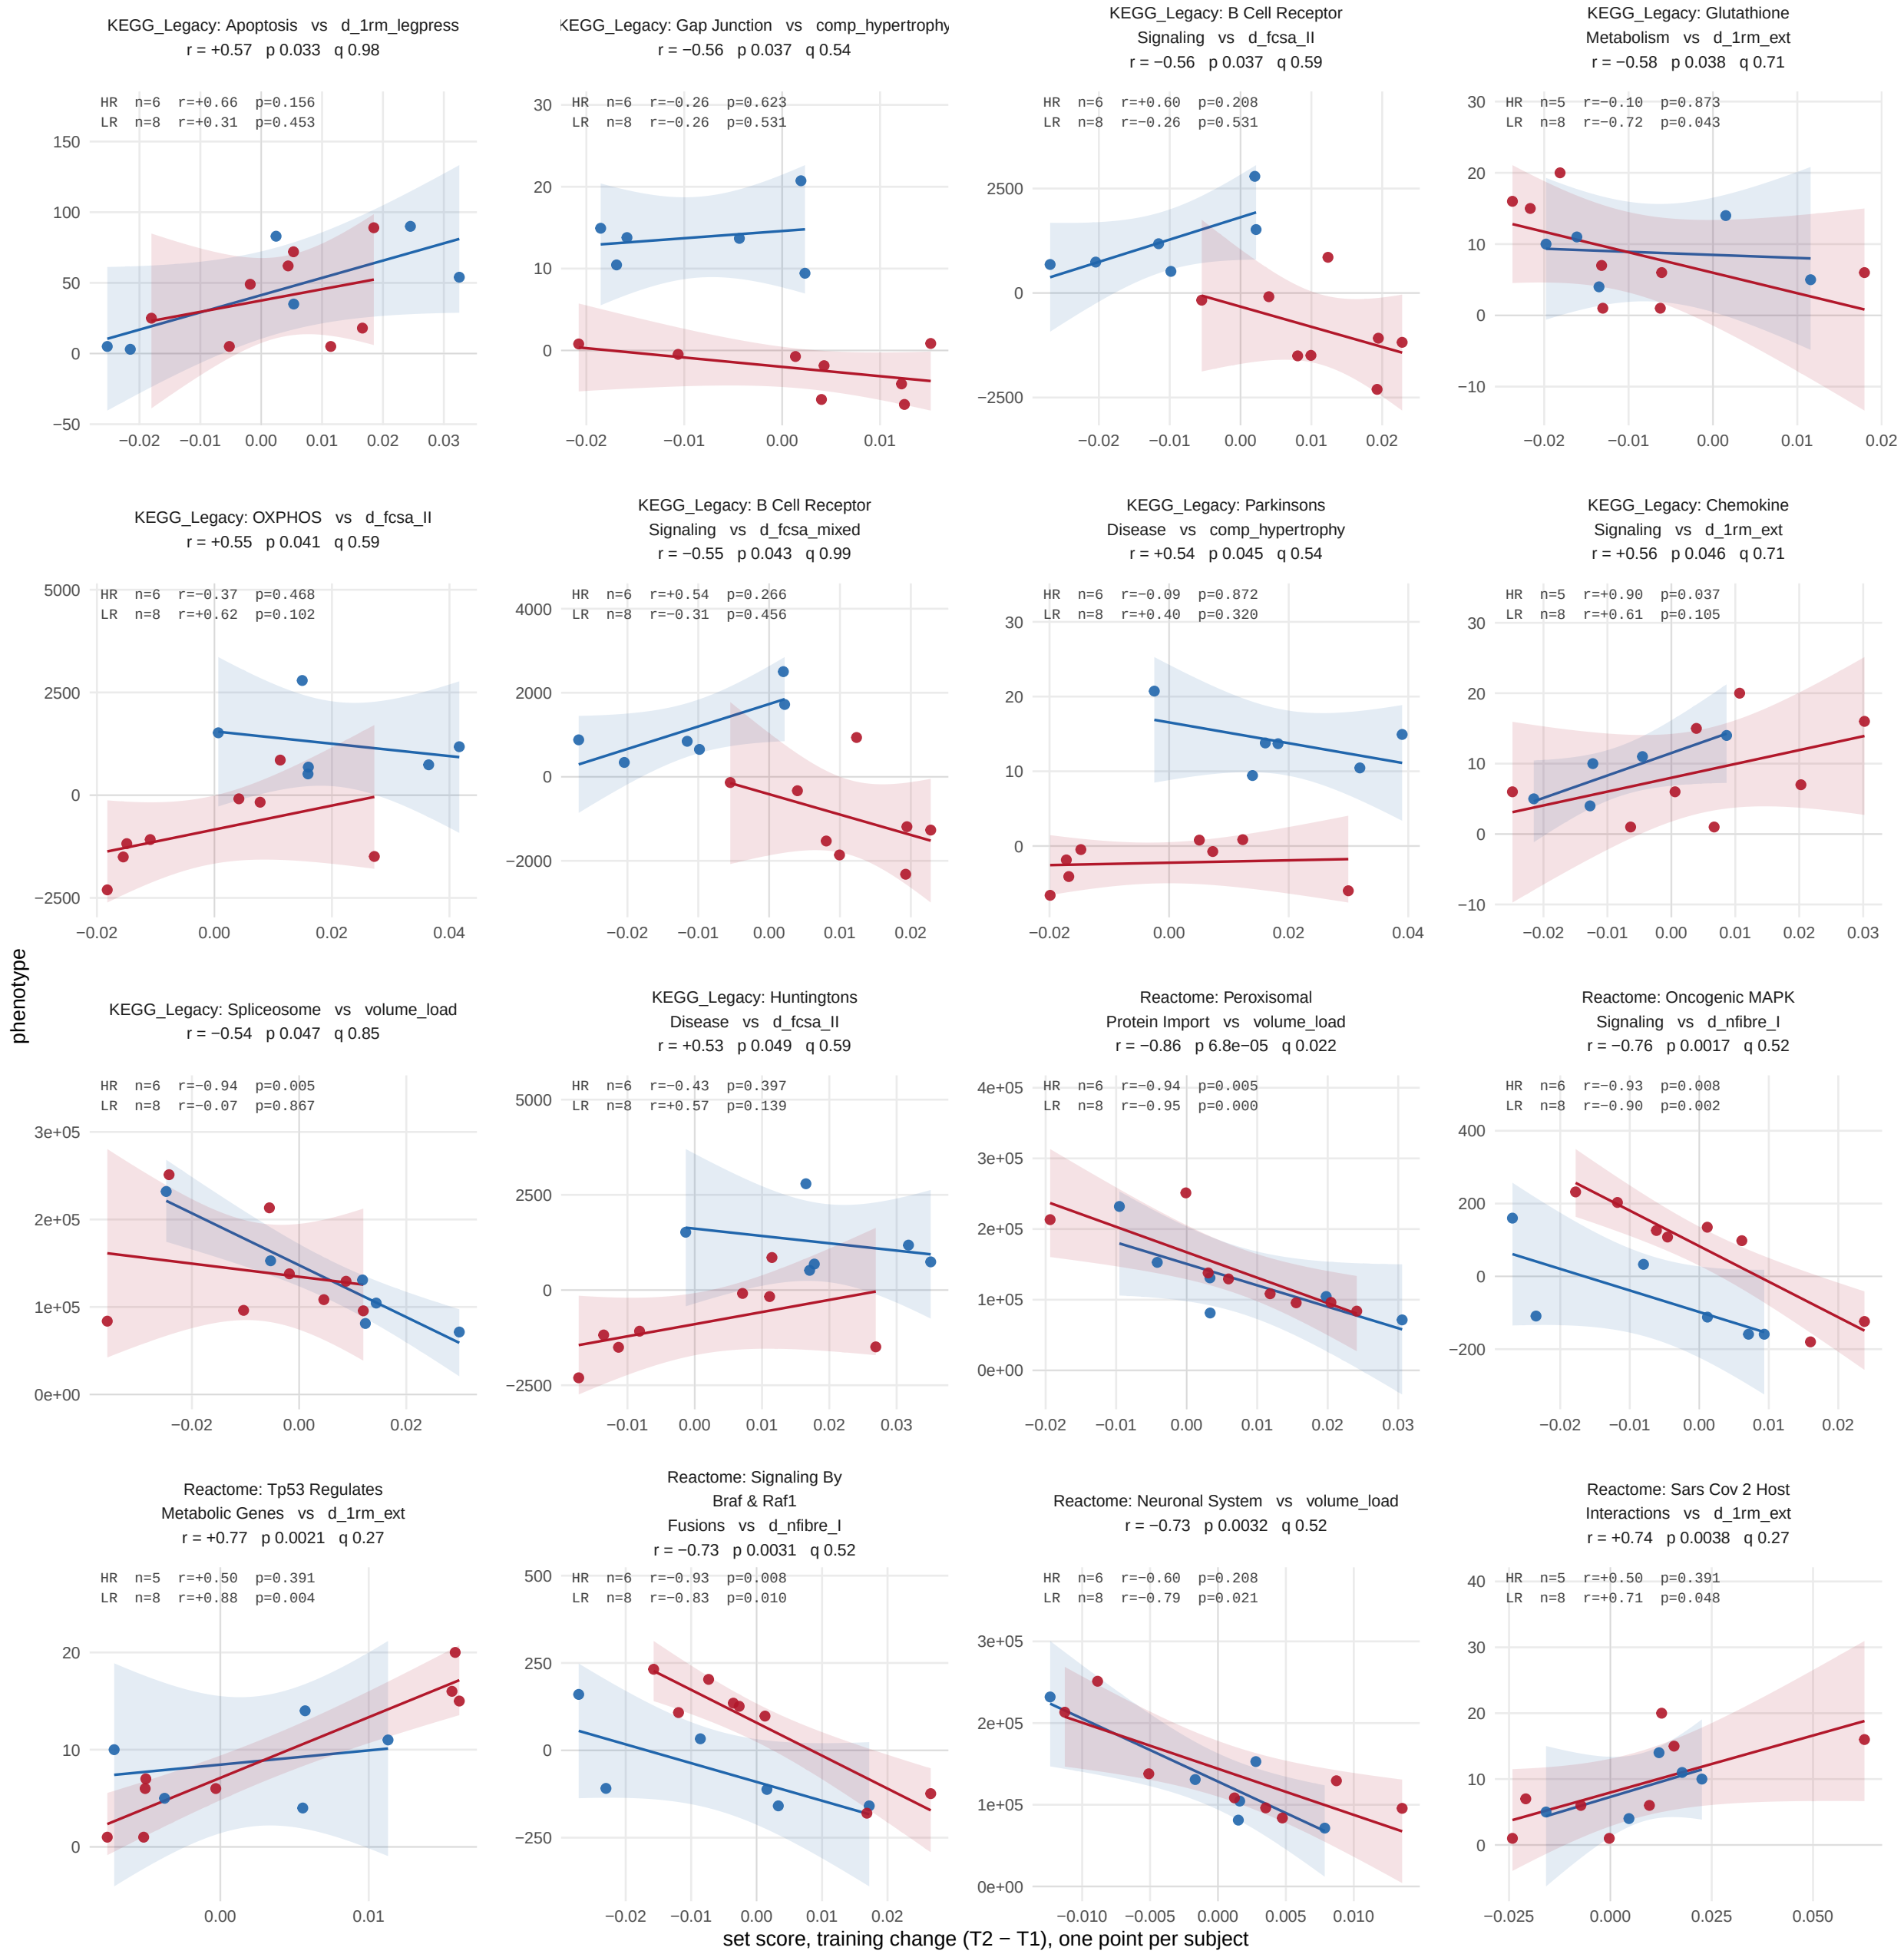


All 518 set-outcome pairs reaching nominal p, by collection then p. Lines are fitted within each arm; the header r is the pooled correlation, q from BH within collection, window and outcome. Nominal p, uncorrected. Each collection is read against its own expectation: GOBP 44.9 of 897, GO_Slim 2.9 of 58, Hallmark 1.7 of 33, KEGG_Legacy 3.1 of 62, Reactome 16.4 of 328.

Set score against phenotype, training change (T2 – T1)

Spearman, subjects pooled across arms



HR LR

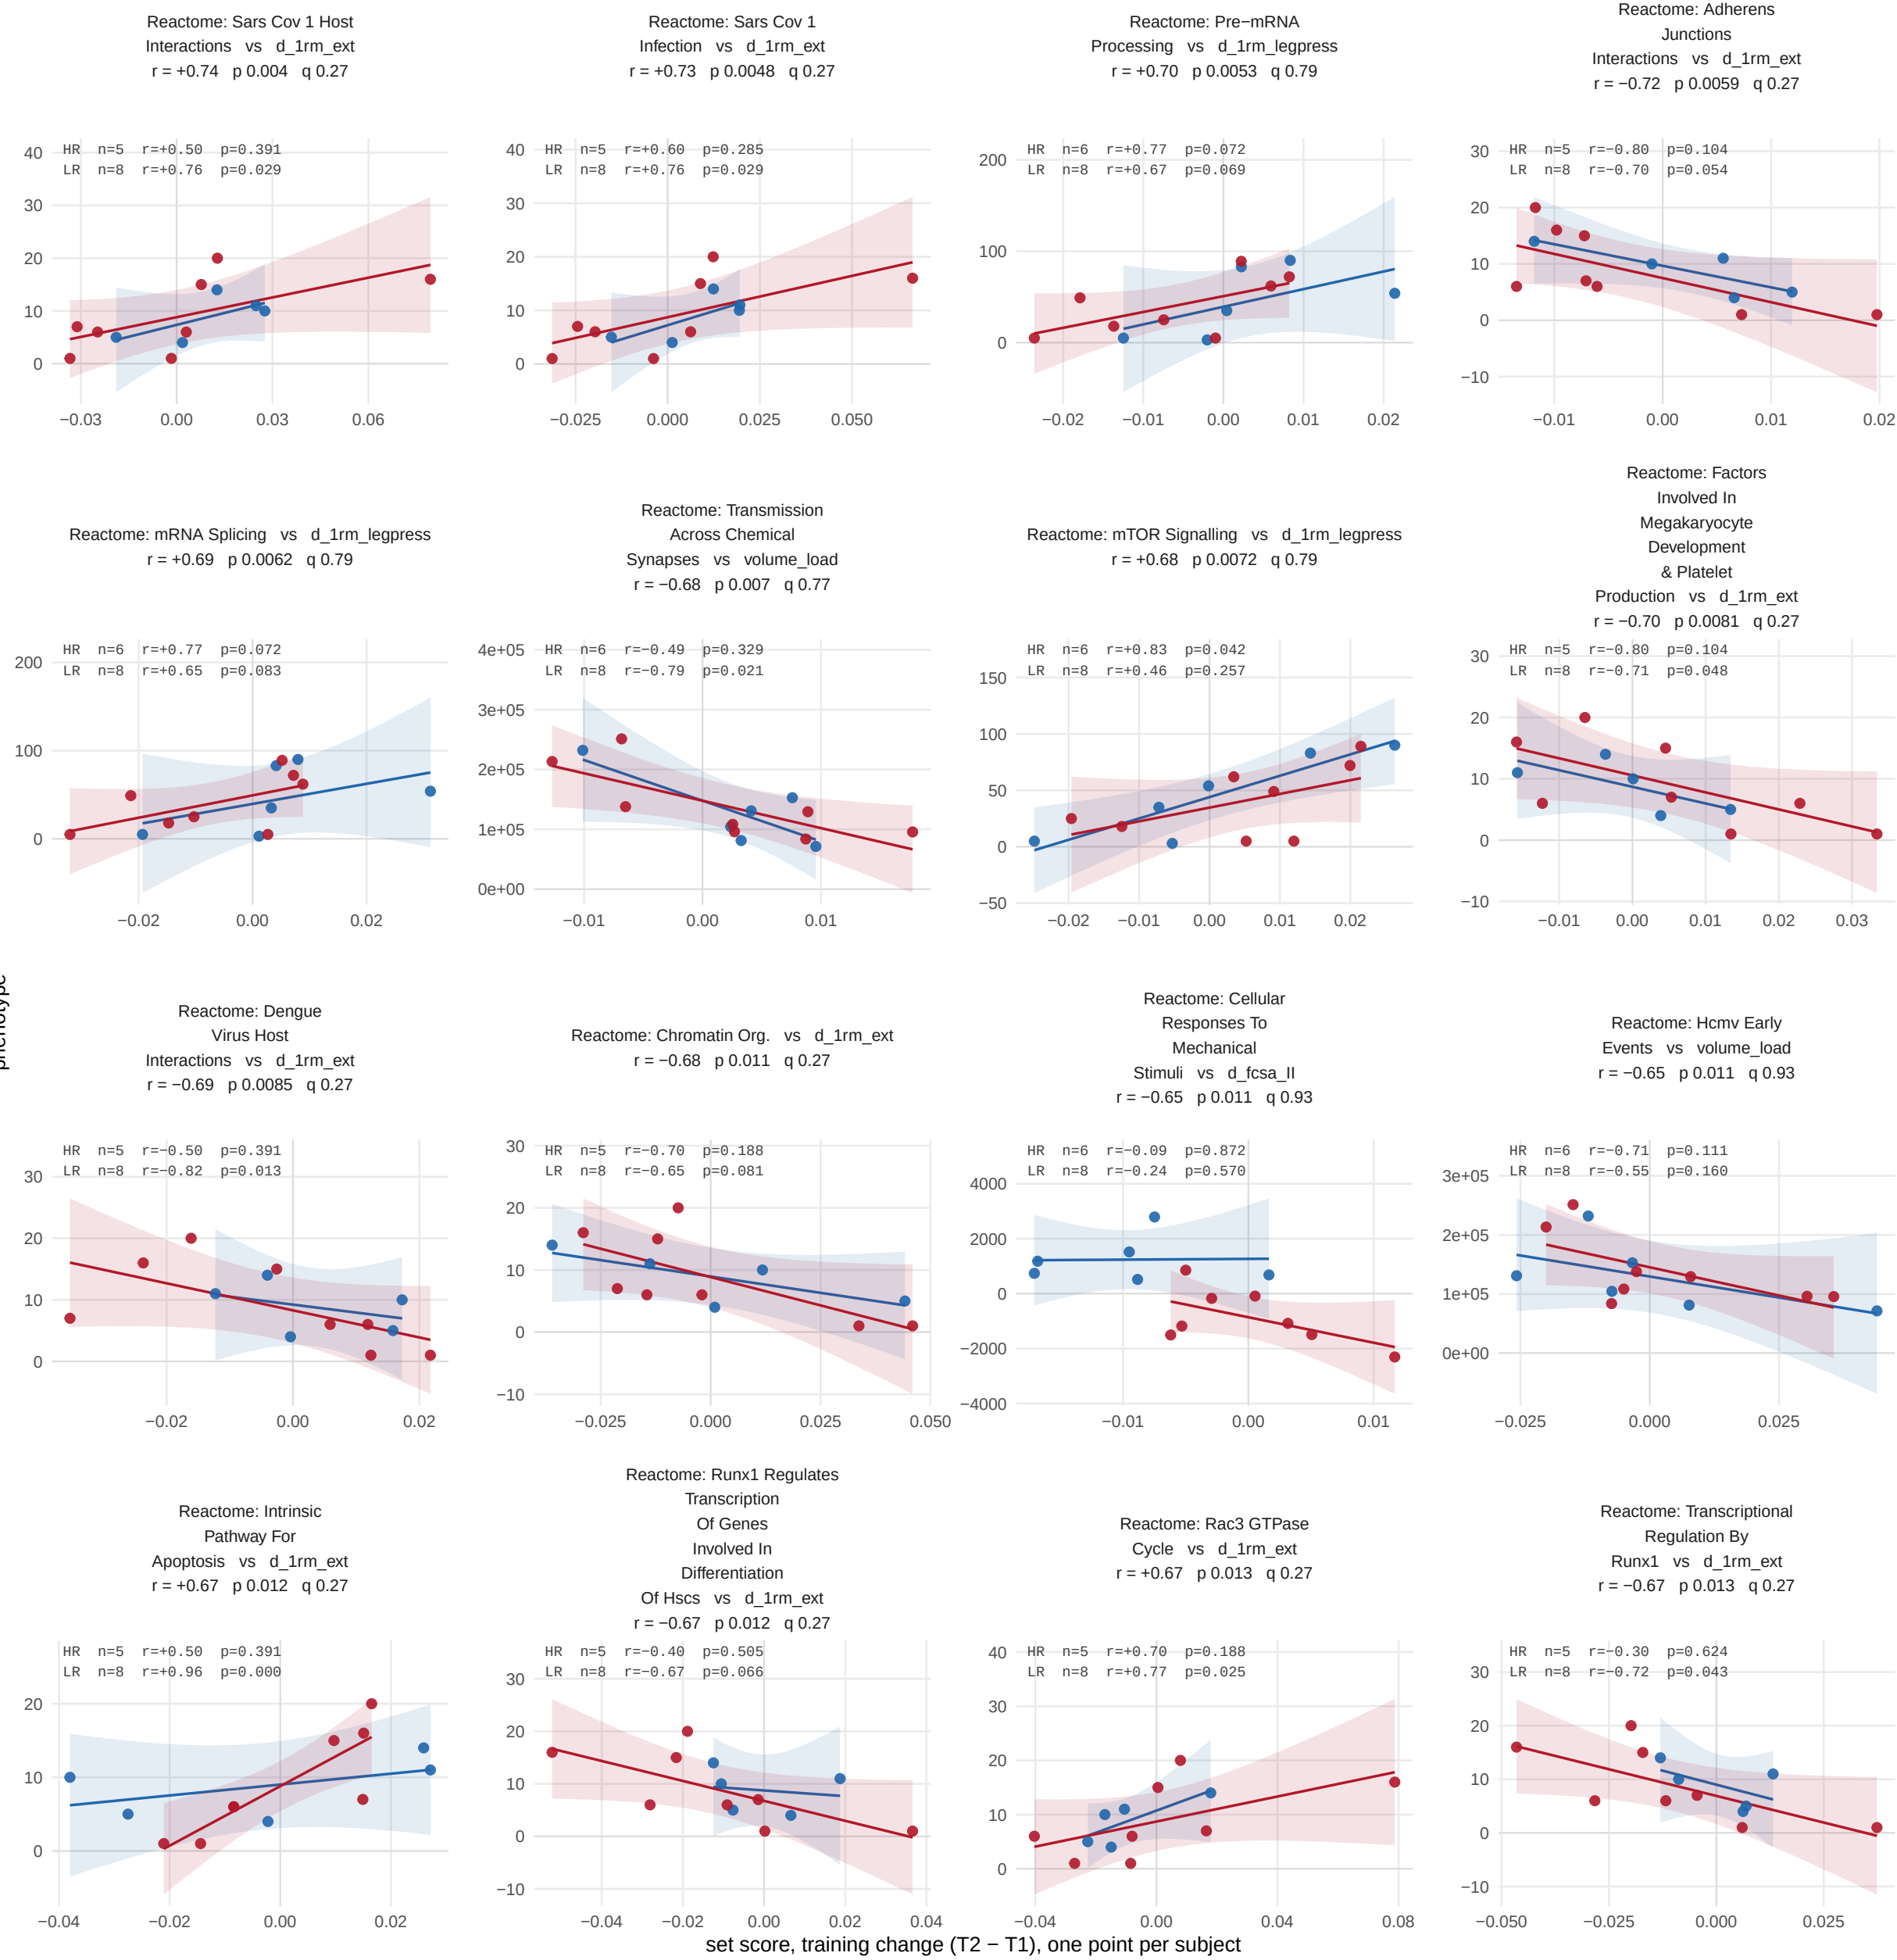

All 518 set-outcome pairs reaching nominal p, by collection then p. Lines are fitted within each arm; the header r is the pooled correlation, q from BH within collection, window and outcome. Nominal p, uncorrected. Each collection is read against its own expectation: GOBP 44.9 of 897, GO_Slim 2.9 of 58, Hallmark 1.7 of 33, KEGG_Legacy 3.1 of 62, Reactome 16.4 of 328.

Set score against phenotype, training change (T2 – T1)

Spearman, subjects pooled across arms

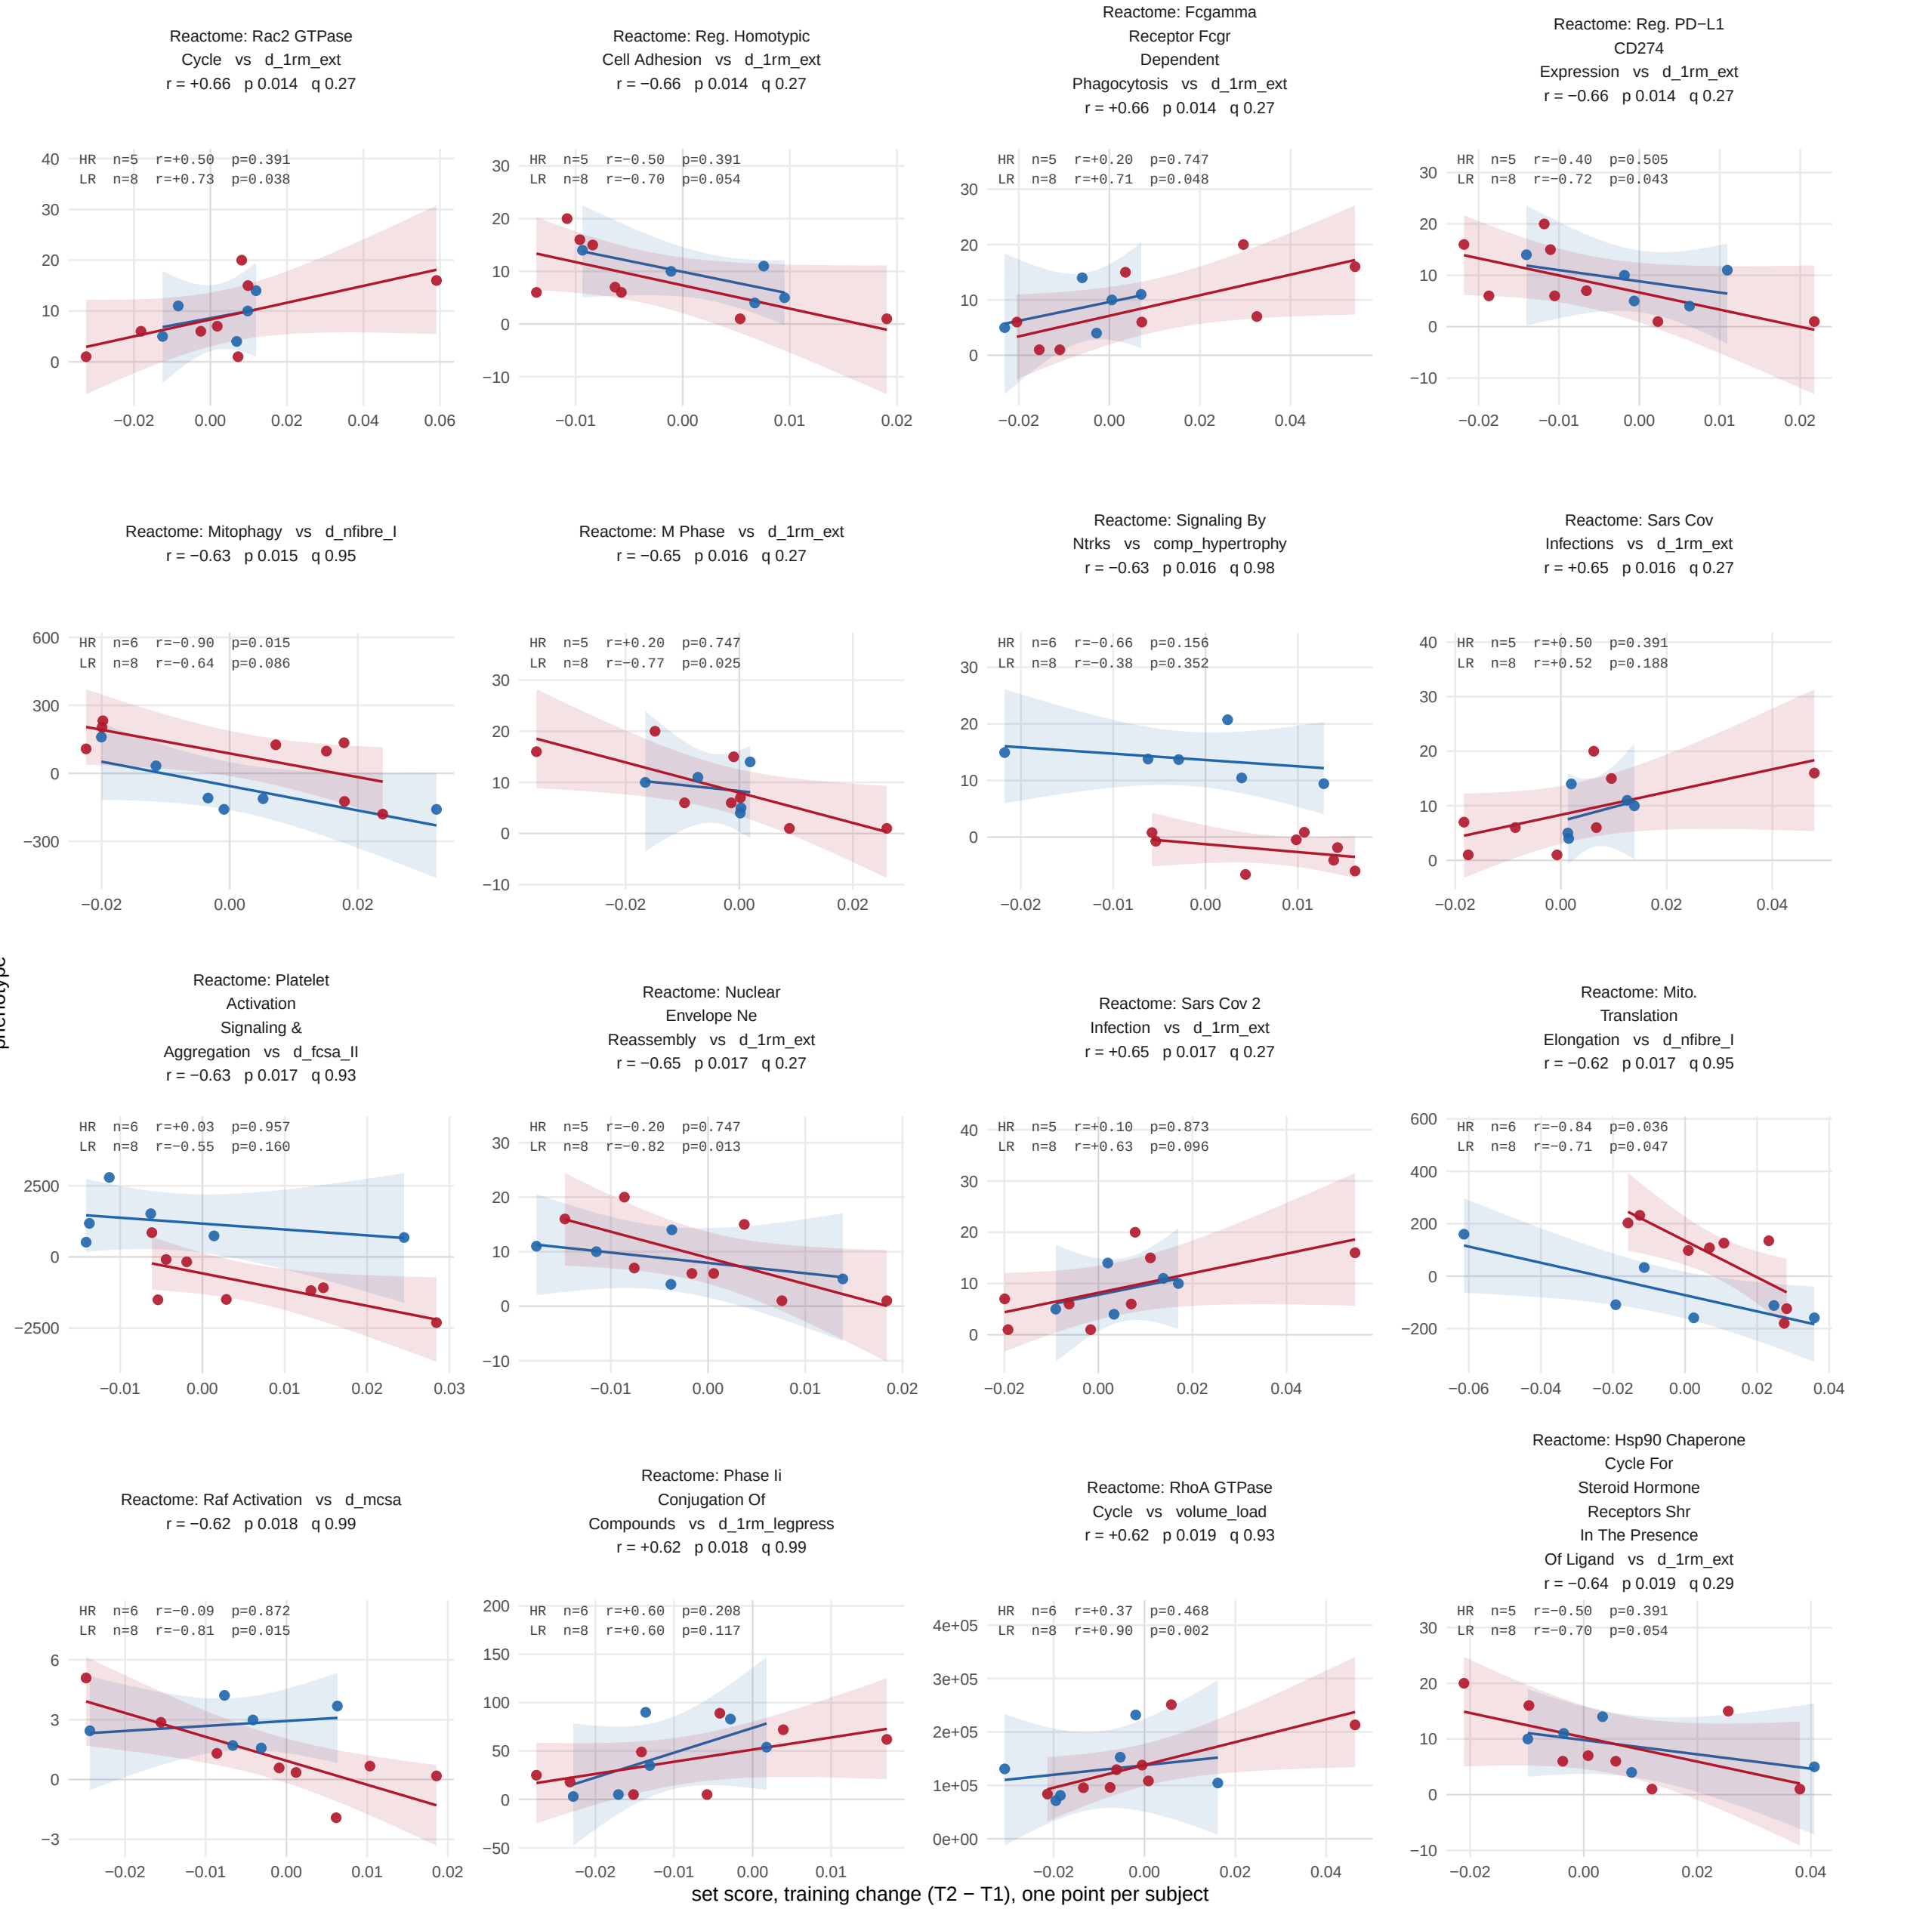

All 518 set-outcome pairs reaching nominal p, by collection then p. Lines are fitted within each arm; the header r is the pooled correlation, q from BH within collection, window and outcome. Nominal p, uncorrected. Each collection is read against its own expectation: GOBP 44.9 of 897, GO_Slim 2.9 of 58, Hallmark 1.7 of 33, KEGG_Legacy 3.1 of 62, Reactome 16.4 of 328.

Set score against phenotype, training change (T2 – T1)

Spearman, subjects pooled across arms

HR LR




All 518 set-outcome pairs reaching nominal p, by collection then p. Lines are fitted within each arm; the header r is the pooled correlation, q from BH within collection, window and outcome. Nominal p, uncorrected. Each collection is read against its own expectation: GOBP 44.9 of 897, GO_Slim 2.9 of 58, Hallmark 1.7 of 33, KEGG_Legacy 3.1 of 62, Reactome 16.4 of 328.

Set score against phenotype, training change (T2 – T1)

Spearman, subjects pooled across arms

HR LR

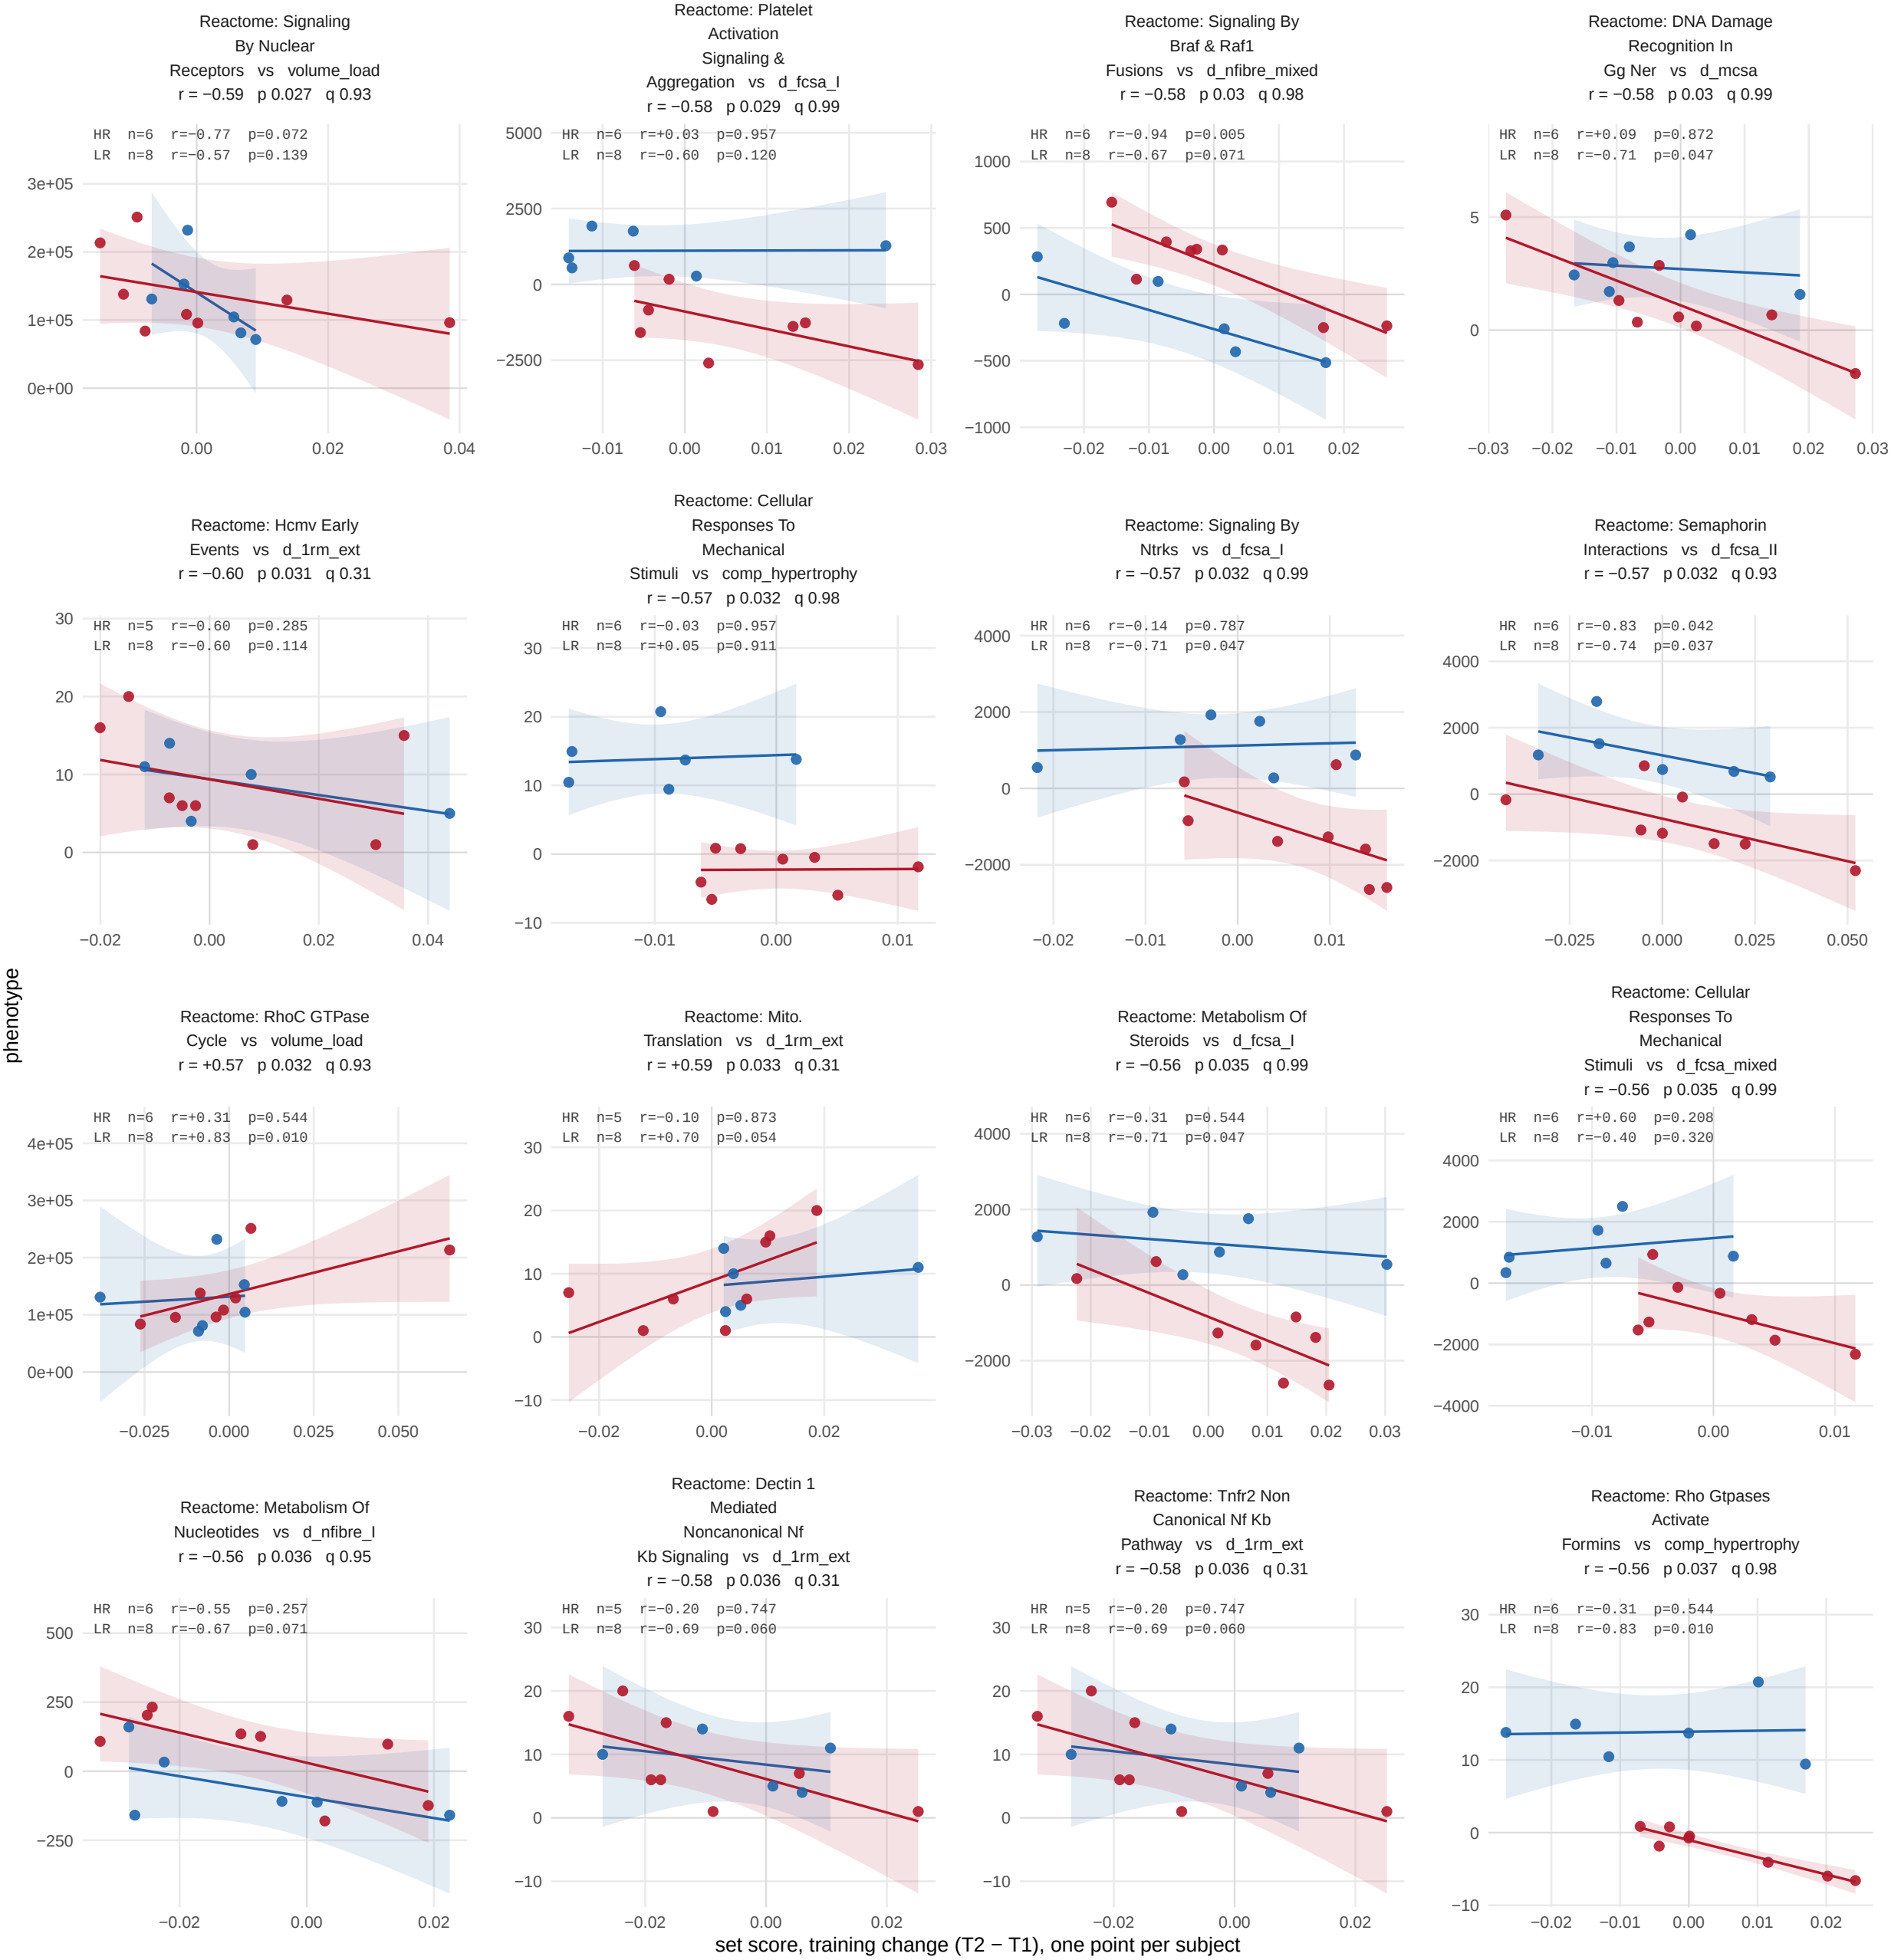


All 518 set-outcome pairs reaching nominal p, by collection then p. Lines are fitted within each arm; the header r is the pooled correlation, q from BH within collection, window and outcome. Nominal p, uncorrected. Each collection is read against its own expectation: GOBP 44.9 of 897, GO_Slim 2.9 of 58, Hallmark 1.7 of 33, KEGG_Legacy 3.1 of 62, Reactome 16.4 of 328.

Set score against phenotype, training change (T2 – T1)

Spearman, subjects pooled across arms


HR LR

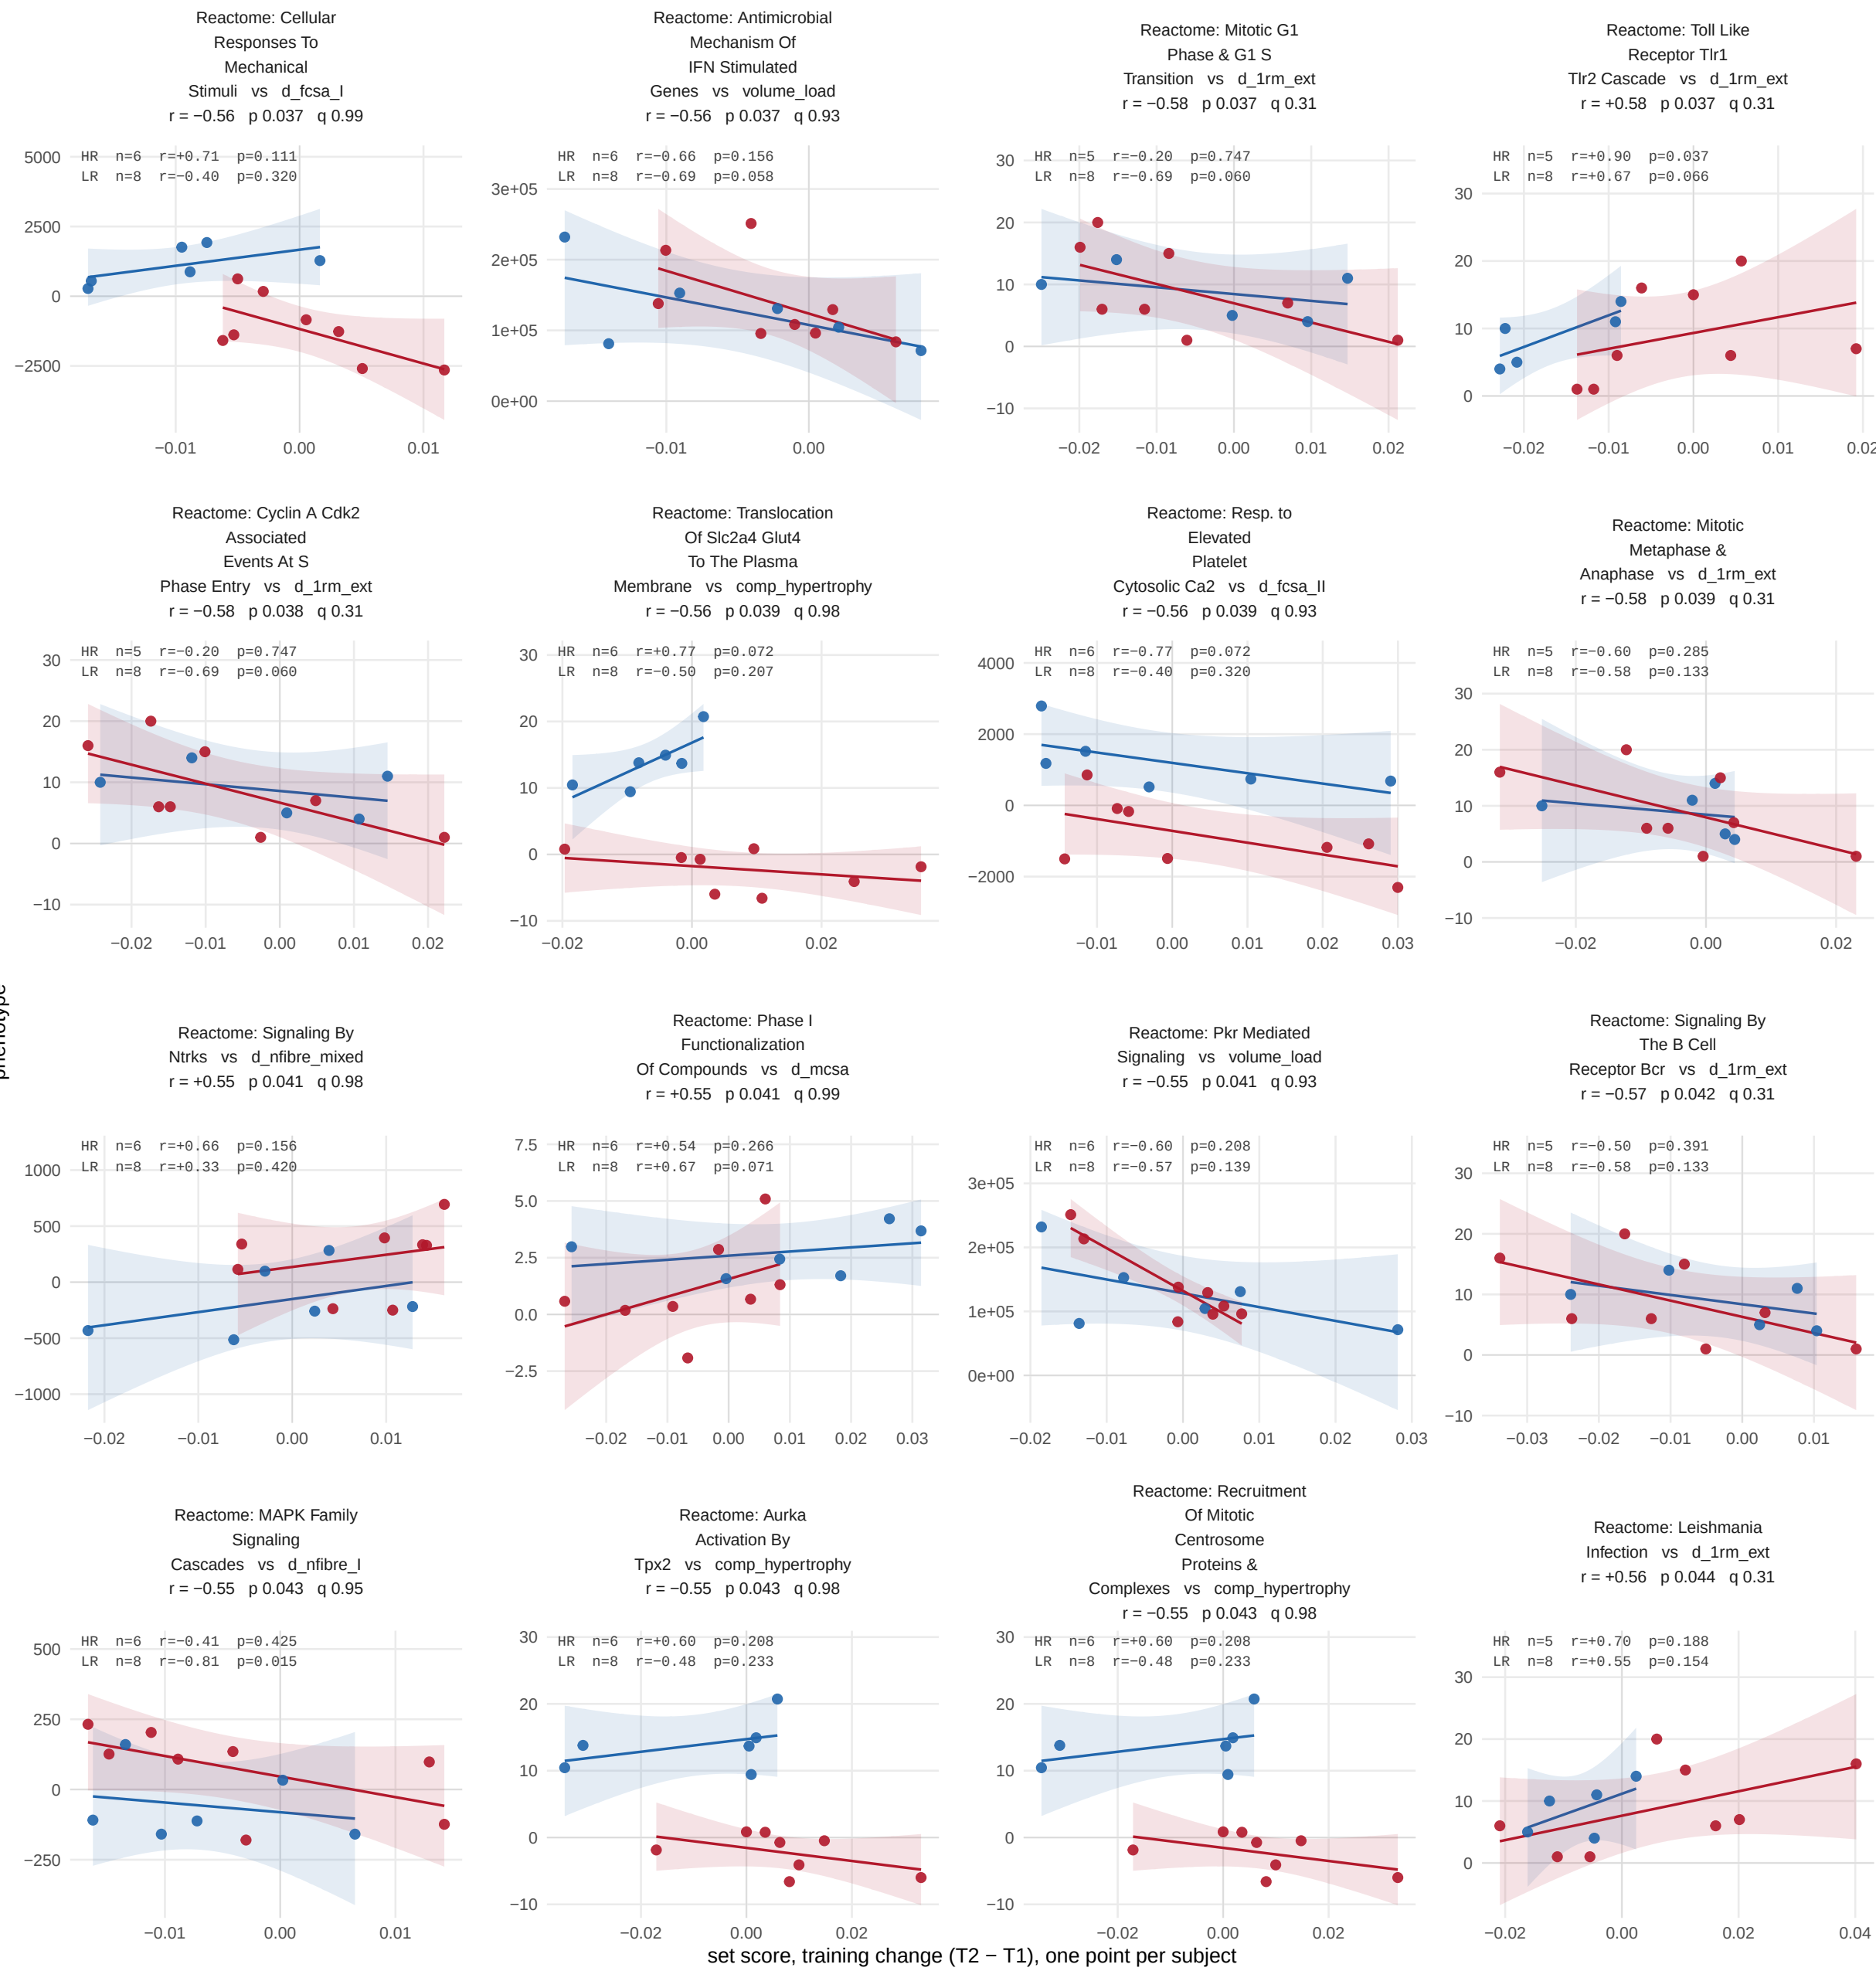

All 518 set-outcome pairs reaching nominal p, by collection then p. Lines are fitted within each arm; the header r is the pooled correlation, q from BH within collection, window and outcome. Nominal p, uncorrected. Each collection is read against its own expectation: GOBP 44.9 of 897, GO_Slim 2.9 of 58, Hallmark 1.7 of 33, KEGG_Legacy 3.1 of 62, Reactome 16.4 of 328.

Set score against phenotype, training change (T2 – T1)

Spearman, subjects pooled across arms




All 518 set-outcome pairs reaching nominal p, by collection then p. Lines are fitted within each arm; the header r is the pooled correlation, q from BH within collection, window and outcome. Nominal p, uncorrected. Each collection is read against its own expectation: GOBP 44.9 of 897, GO_Slim 2.9 of 58, Hallmark 1.7 of 33, KEGG_Legacy 3.1 of 62, Reactome 16.4 of 328.

Set score against phenotype, training change (T2 – T1)

Spearman, subjects pooled across arms

HR LR

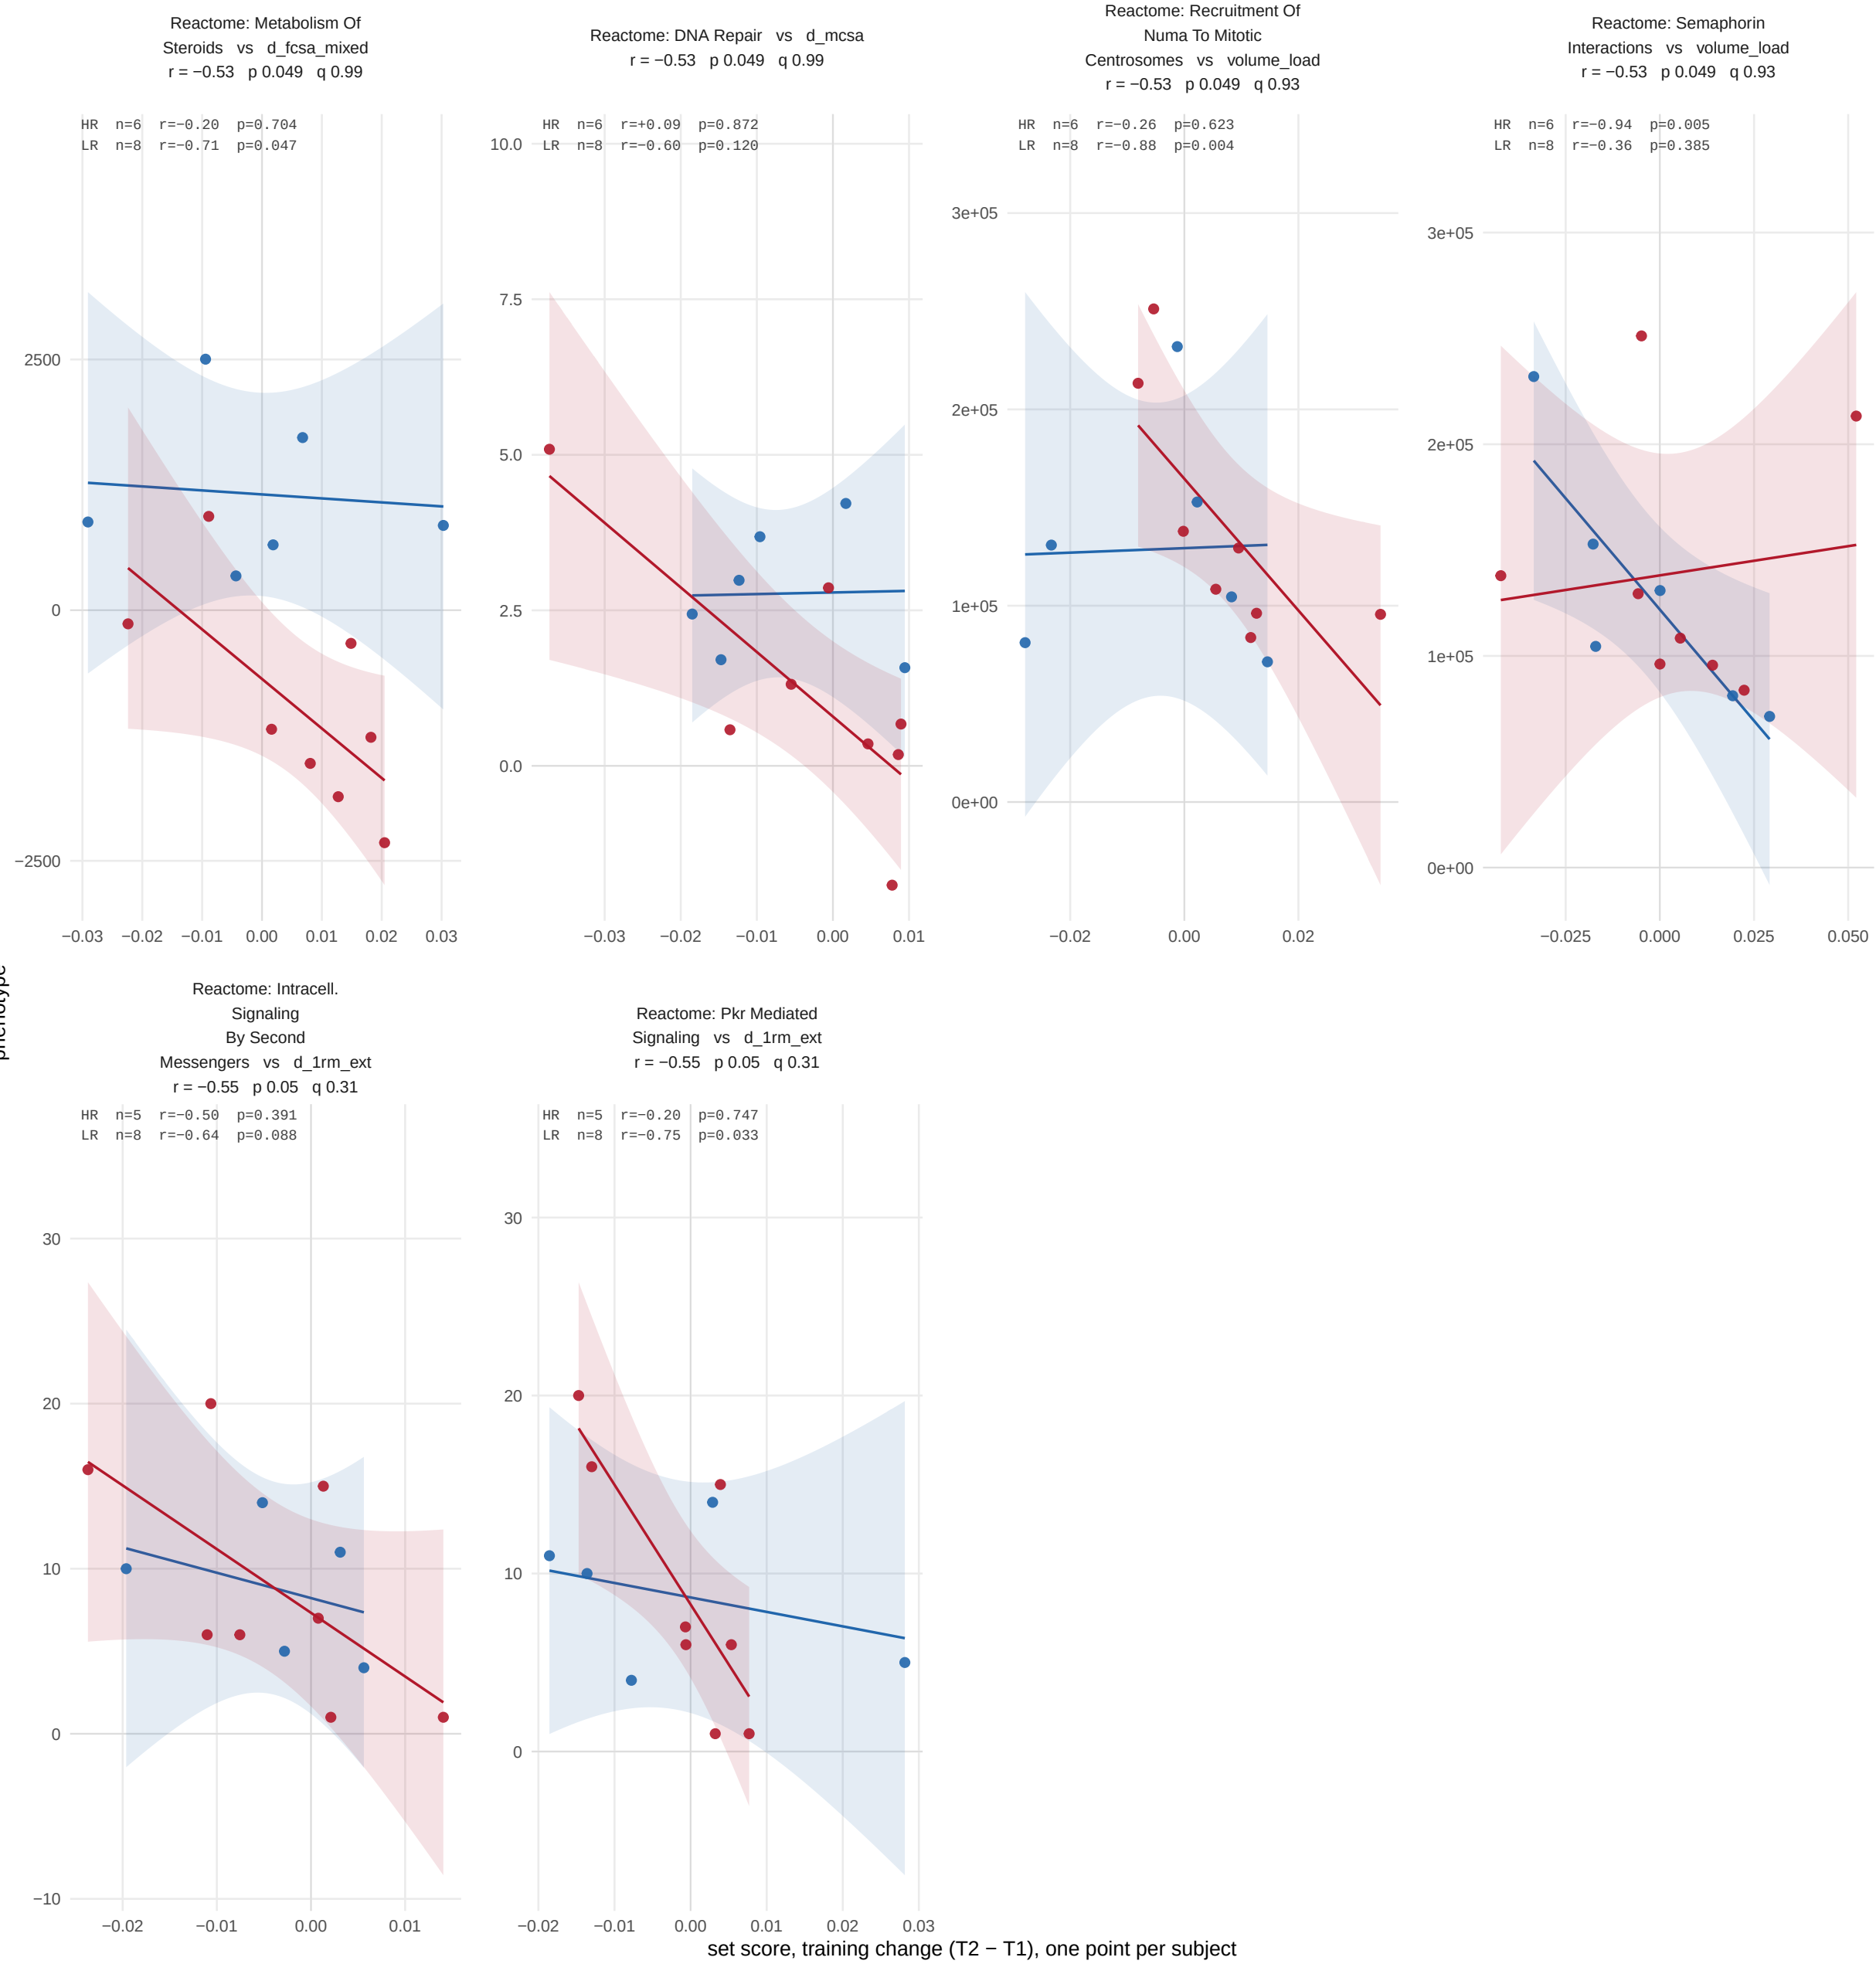

All 518 set-outcome pairs reaching nominal p, by collection then p. Lines are fitted within each arm; the header r is the pooled correlation, q from BH within collection, window and outcome. Nominal p, uncorrected. Each collection is read against its own expectation: GOBP 44.9 of 897, GO_Slim 2.9 of 58, Hallmark 1.7 of 33, KEGG_Legacy 3.1 of 62, Reactome 16.4 of 328.