


S4b Figure. Per-protein abundance across the two significance thresholds. Row z-scored abundance per sample, hierarchically clustered within functional groups (GO Slim and Hallmark). (A) Aging at $FDR < 0.05$. (B) Aging at $\Pi < 0.05$. (C) Training-in-Young at $FDR < 0.05$. (D) Training-in-Young at $\Pi < 0.05$.


(A) Aging signature: FDR-significant (functional classification)

278 Aging FDR < 0.05 proteins | abundance per sample (row z-score) | hierarchical clustering within 10 functional groups (GO Slim + Hallmark)

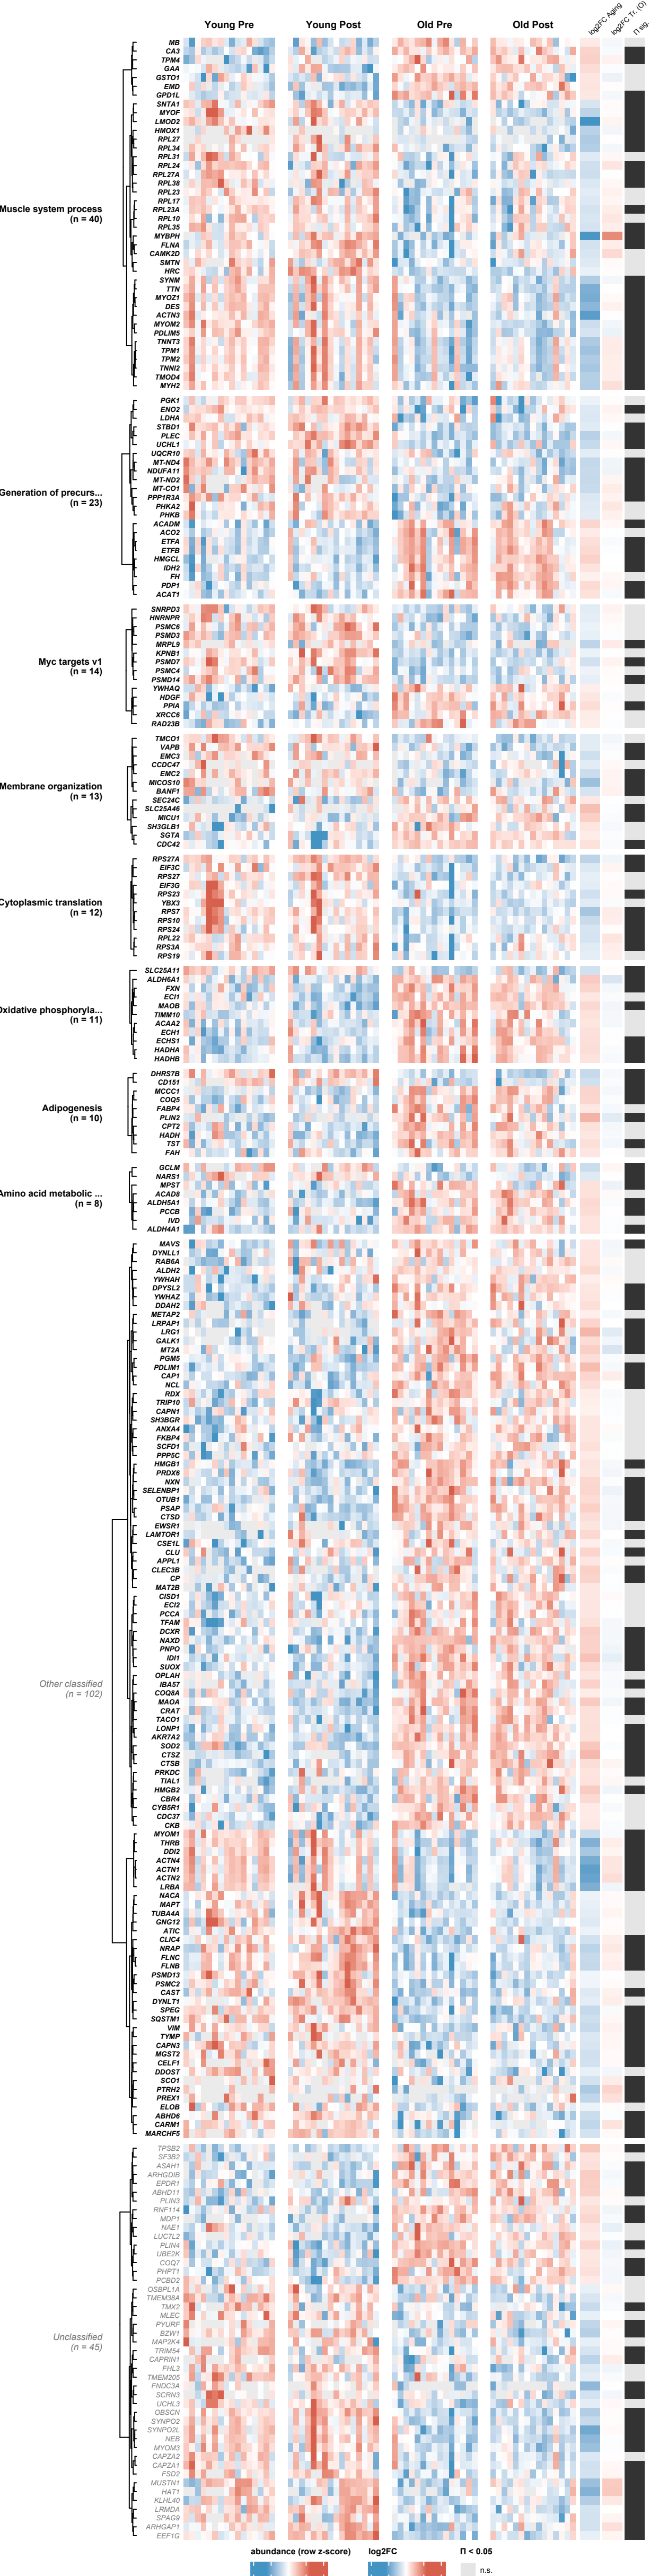


(B) Aging signature: Pi-significant (functional classification)

195 Aging $\Pi < 0.05$ proteins | abundance per sample (row z-score) | hierarchical clustering within 9 functional groups (GO Slim + Hallmark)

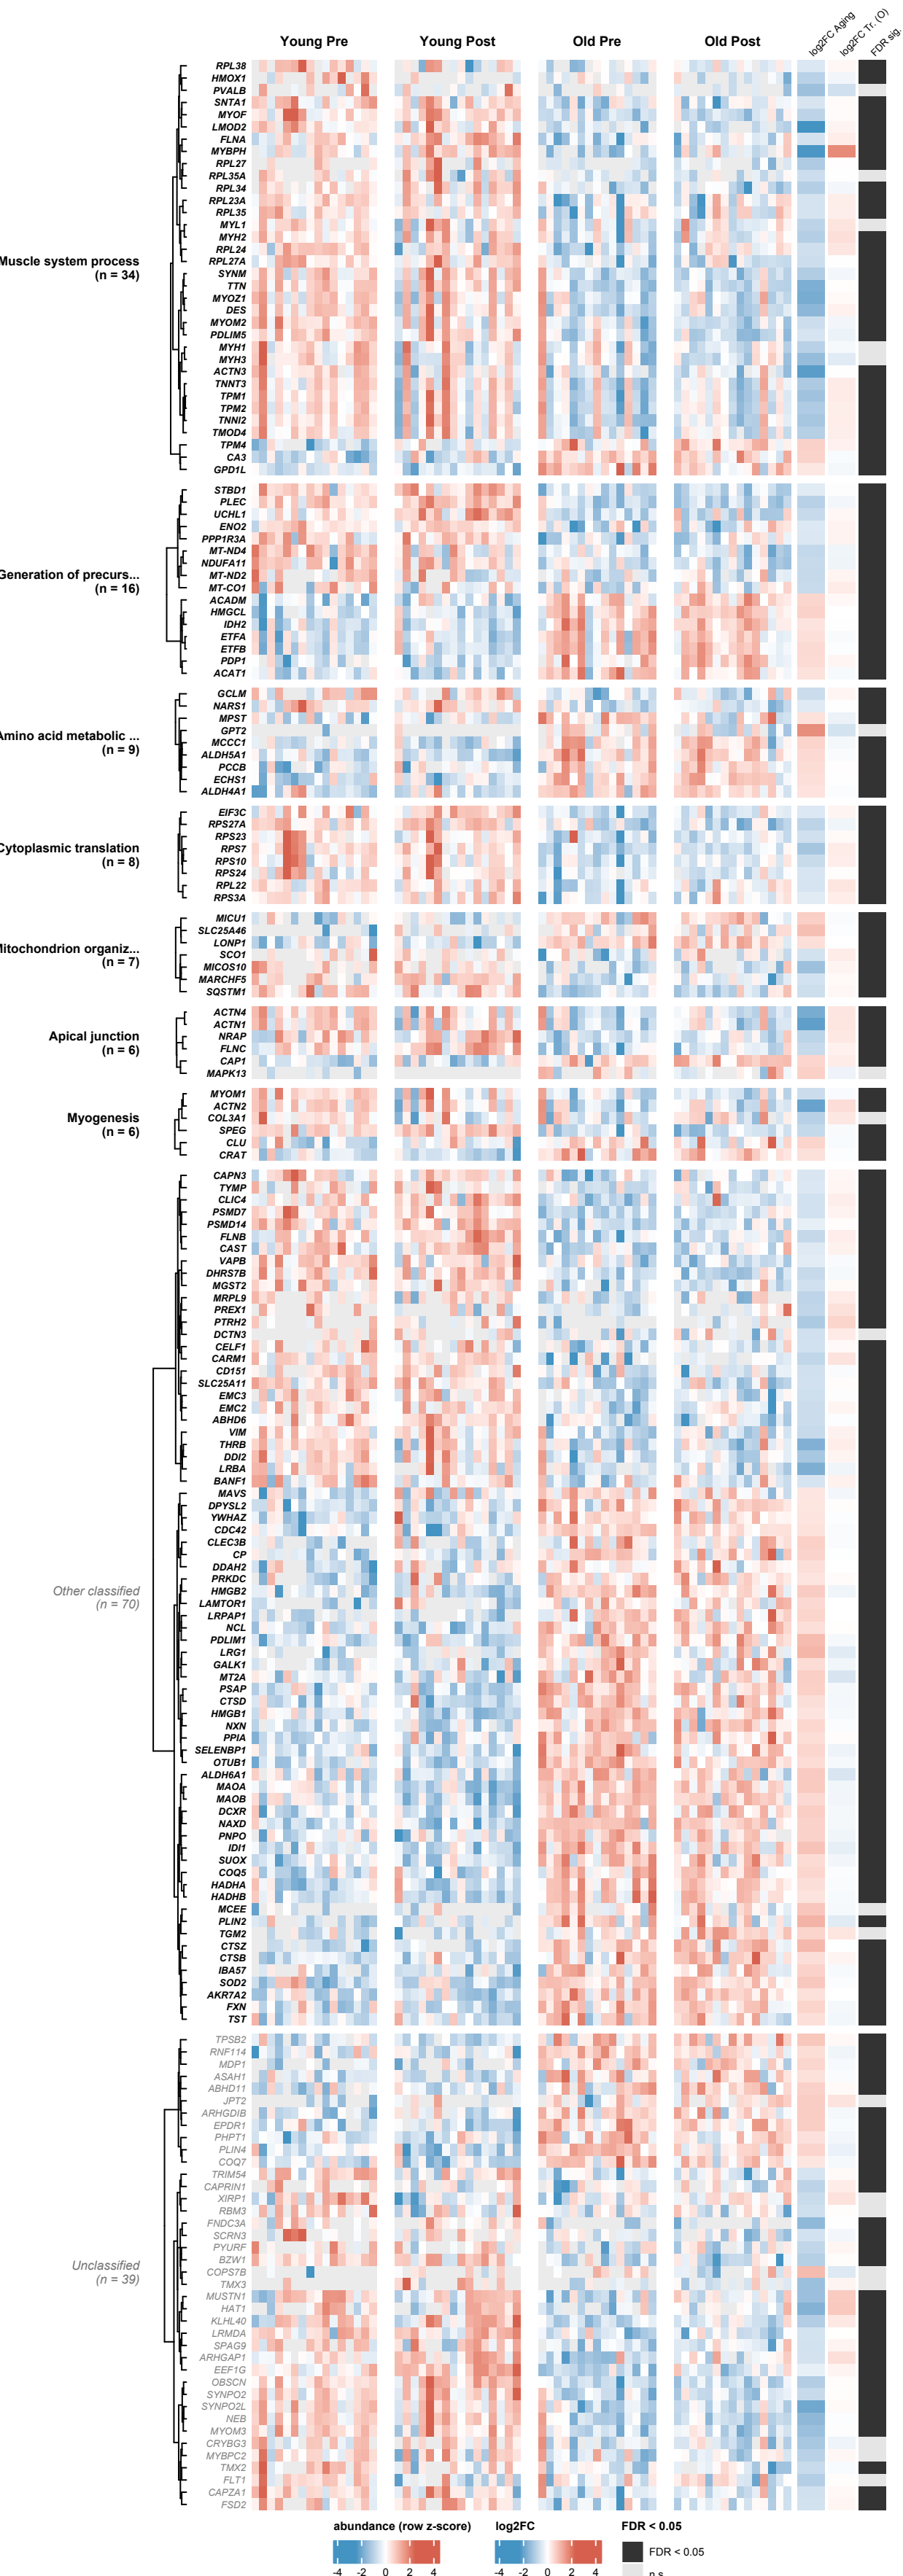

(C) Training (Young) signature: FDR-significant (functional classification)

135 Training(Y) FDR < 0.05 proteins | abundance per sample (row z-score) | hierarchical clustering within 14 functional groups (GO Slim + Hallmark)

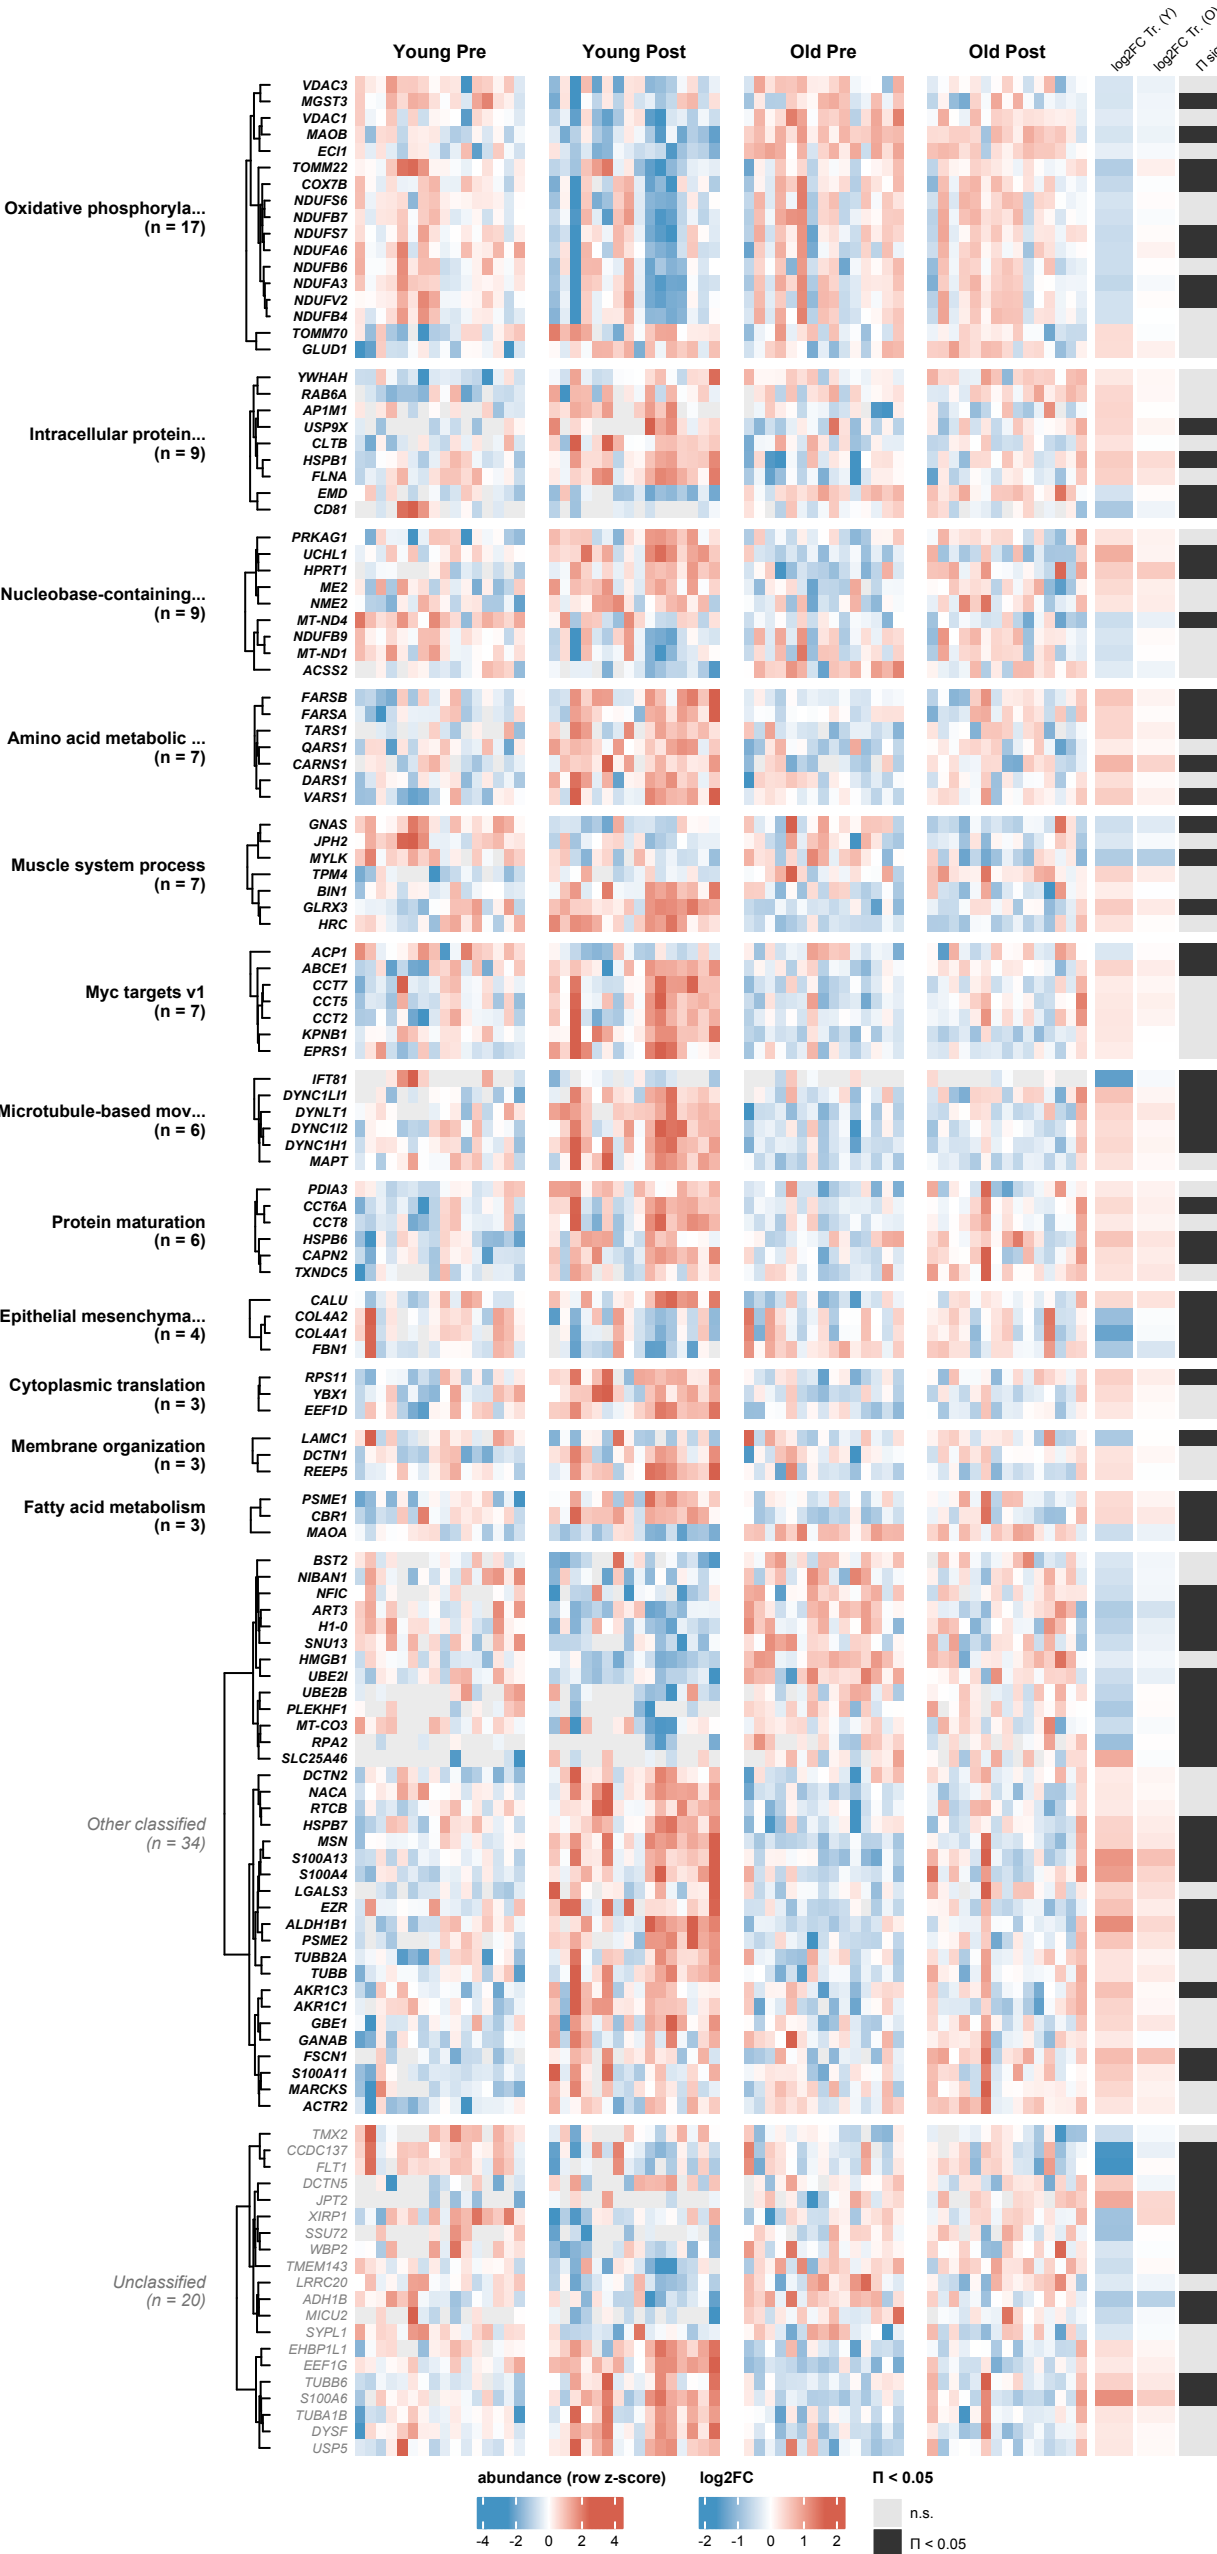

(D) Training (Young) signature: Pi-significant (functional classification)

99 Training(Y) $\Pi < 0.05$ proteins | abundance per sample (row z-score) | hierarchical clustering within 15 functional groups (GO Slim + Hallmark)

