A traceable path from source to prediction

Research preprocessing and runtime inference share the same contract

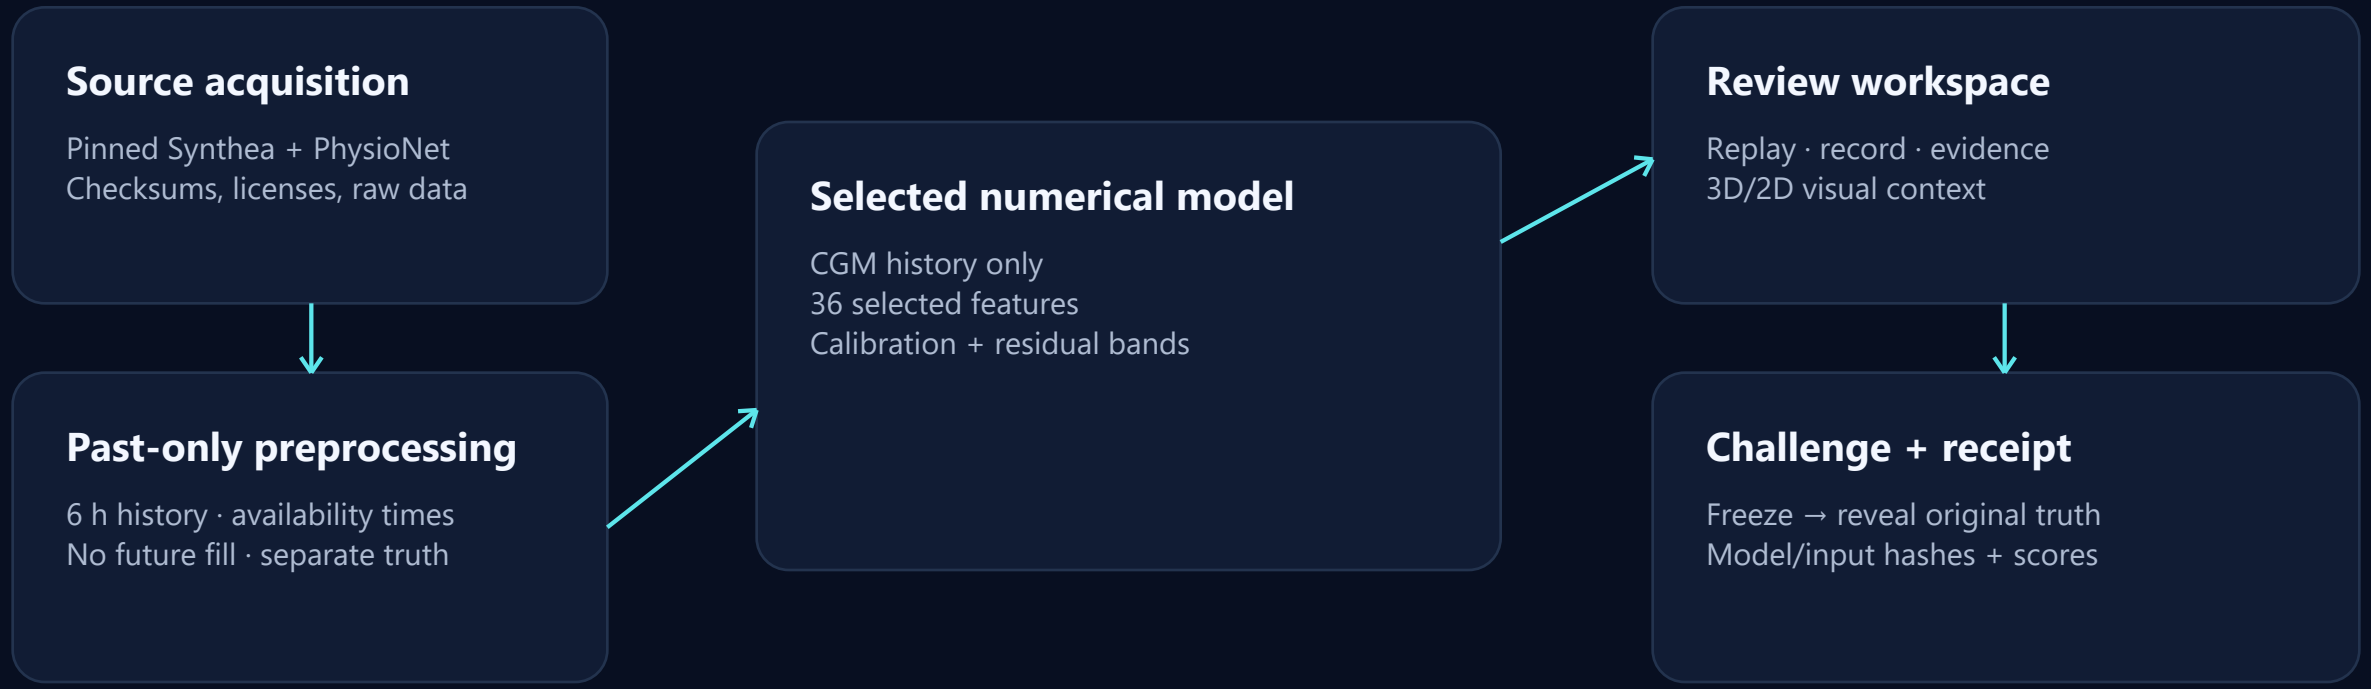

The model only receives the recorded past

Six-hour history, explicit availability times and automated prefix checks

01

CGM

Backward as-of alignment; carry forward no more than 15 minutes; age and coverage are features.

02

Heart rate and IBI

Completed past bins; minute-rounded HR delayed 60 seconds; no cross-gap HRV pairs.

03

Leakage checks

Truncating future rows must preserve features. Source timestamps cannot exceed the cutoff.

Freeze first. Reveal later. Compare honestly.

A computation boundary the jury can inspect

01

Choose

Participant, cutoff
and input stress case

02

Freeze

Restrict the prefix
Preserve model output

03

Reveal

Original recorded future
No new prediction

04

Compare

Error, persistence, bands
Download receipt

A working demo does not require a fake login

Demo mode, configured authentication and persistence have separate boundaries

01

Deterministic demo

Open the bundled research workspace without an account.

02

Provider-backed identity

Supabase connected. Email confirmation on; Google off. Account-flow verification pending.

03

Local and hosted state

Document which actions persist locally, remotely or only for the current session.