

MSc_group_c

ITU MiniTwit Report Skeleton

May 2024

1 Introduction

2 System perspective

3 Process Perspective

3.1 CI/CD

- Github actions
- Python test were modified to work without CI chains and now serves as a quality gate.

3.2 Monitoring


- Prometheus as an Echo middleware, with additional custom made metrics.
 - TODO: make list of custom metrics.
 - Was chosen on the background of:
 - * Demonstrated in Class
 - * Easy integration with golang/echo via. middleware.
- Grafana
 - As of writing this the dashboards does not work due to swarm scaling. All pictures are from the day of the simulator stopping.
 - Users:
 - * Admin user with password shared with the group.
 - * Helge and Mircea specific login as described on Teams.
 - Was chosen on the background of:
 - * Demonstrated in Class
 - * Rich Visualization

Whitebox Request and response monitoring dashboard:




Timeframe: Last 2 days:

Whitebox User action dashboards monitoring: Timeframe: Last 7 days:

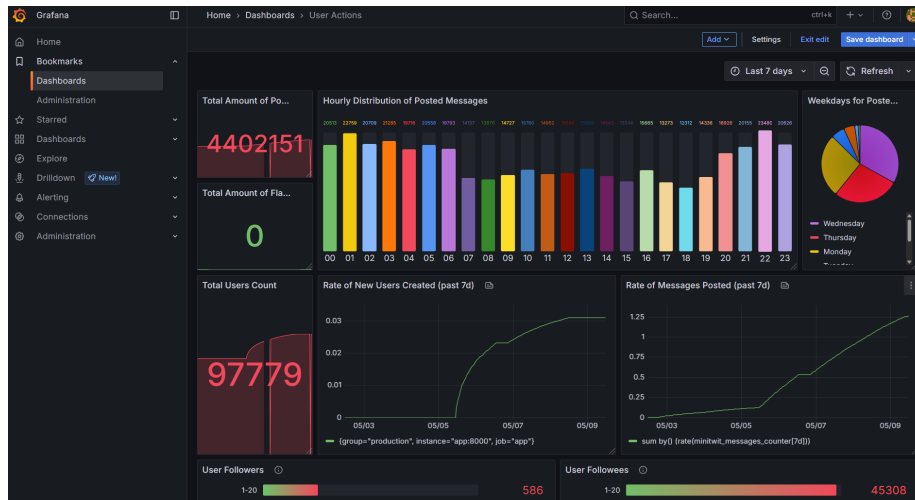


Whitebox Virtual memory dashboard monitoring: Timframe: last 5 minutes:

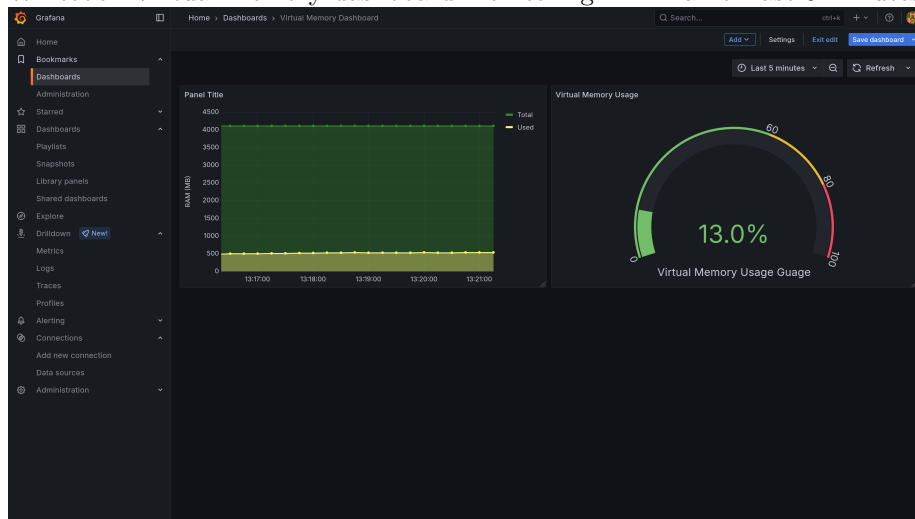

Black box user side error monitoring was given by the Helge and Mircea in form of the Status and Simulator API errors graf. We were encouraged to just use this as our client side error monitoring.

DigitalOcean provides some monitoring capabilities (Bandwidth, CPU usage, and Disk I/O). This did help to identify an attack. More on that [Insert reference here]

An alert system was set up via a Discord bot that on the server via a cronjob that checks every 5 minutes. If the application is not up it sends a Discord message and tags everyone on our group server.

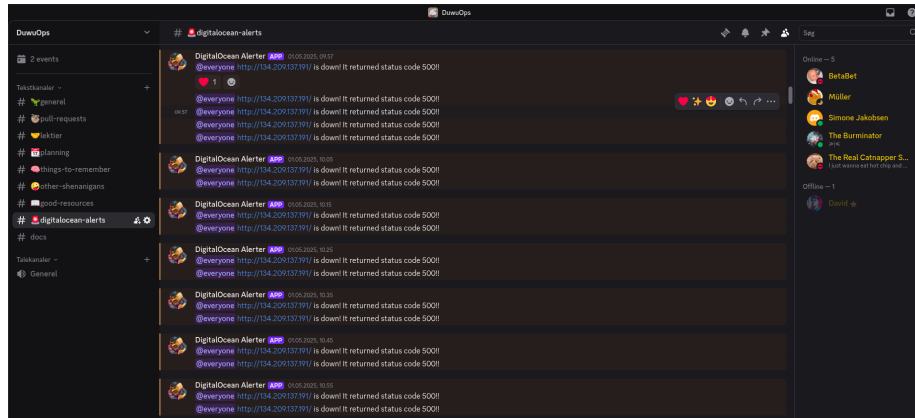

3.3 Logging

- The ELK method was implemented but ultimately scrapped in favor of using loki/alloy that intergrate with Grafana which gather our logging and monitoring the same place.
- Practical Principles:
 - TODO: A process should not worry about storage
 - TODO: A process should log only what is necessary
 - TODO: Logging should be done at the proper level: Mention emoji use
 - Logs should be centralised: All logs can be found via Grafana->Drilldown->Logs

3.4 Strategy for scaling and upgrades

- Used docker swarm using docker stack so that we can leverage the docker compose setup that was already made. Some changes were made to accomidate the swarm set up. These are a network overlay, setting how many replicas per service, where nesecary setting where the service should be placed, and update configs.
- The update config for the minitwit application is set so that it updates one at a time. This is set as we only have two instances of minitwit and if an update fails we don't want more than one instance to be down. On failure we do a rollback.

3.5 AI use

Throughout the development process, all team members leveraged artificial intelligence tools to varying degrees and for diverse applications. The primary AI systems employed included ChatGPT, Claude, DeepSeek, and GitHub Copilot. Team members provided contextual information regarding code issues or implementation challenges, utilizing AI-generated responses as foundational guidance

for problem-solving methodologies rather than direct solution implementation. This methodology facilitated the identification of potential problem domains and remediation strategies while preserving critical assessment of AI-derived recommendations. In accordance with transparency requirements, AI tools have been formally acknowledged as co-authors in relevant version control commits where their contributions influenced the development process. (This paragraph was written using AI lol)