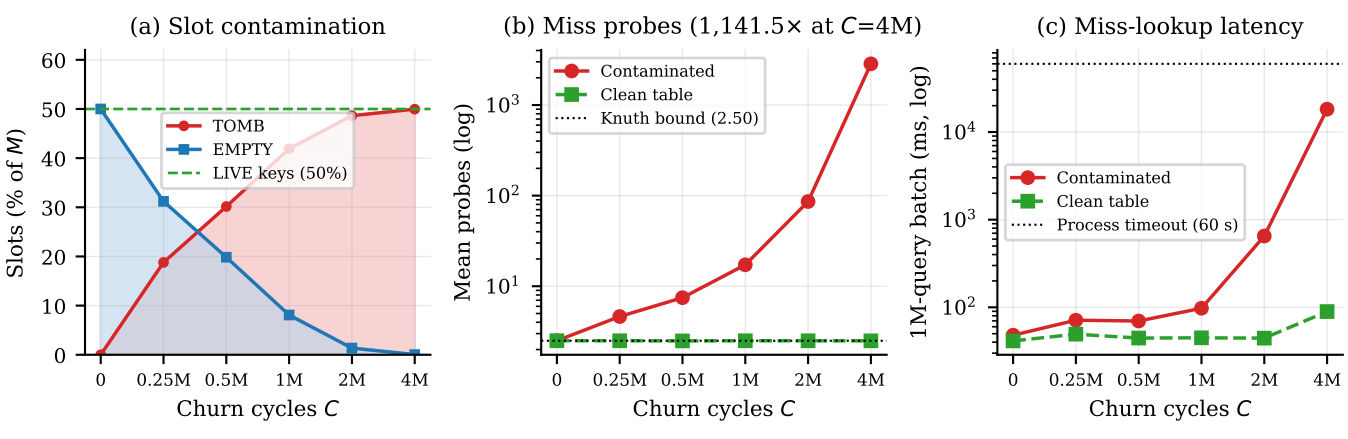
(a) Slot contamination
Slots (% of M)
60
50
40
30
20
10
0
TOMB
EMPTY
LIVE keys (50%)
0
0.25M
0.5M
1M
2M
4M
Churn cycles C
(b) Miss probes (1,141.5× at C=4M)
Mean probes (log)
10^3
10^2
10^1
Contaminated
Clean table
Knuth bound (2.50)
0
0.25M
0.5M
1M
2M
4M
Churn cycles C
(c) Miss-lookup latency
1M-query batch (ms, log)
10^4
10^3
10^2
Contaminated
Clean table
Process timeout (60 s)
0
0.25M
0.5M
1M
2M
4M
Churn cycles C