


Using Processes

The application and object code run in separate processes, possibly on different machines.

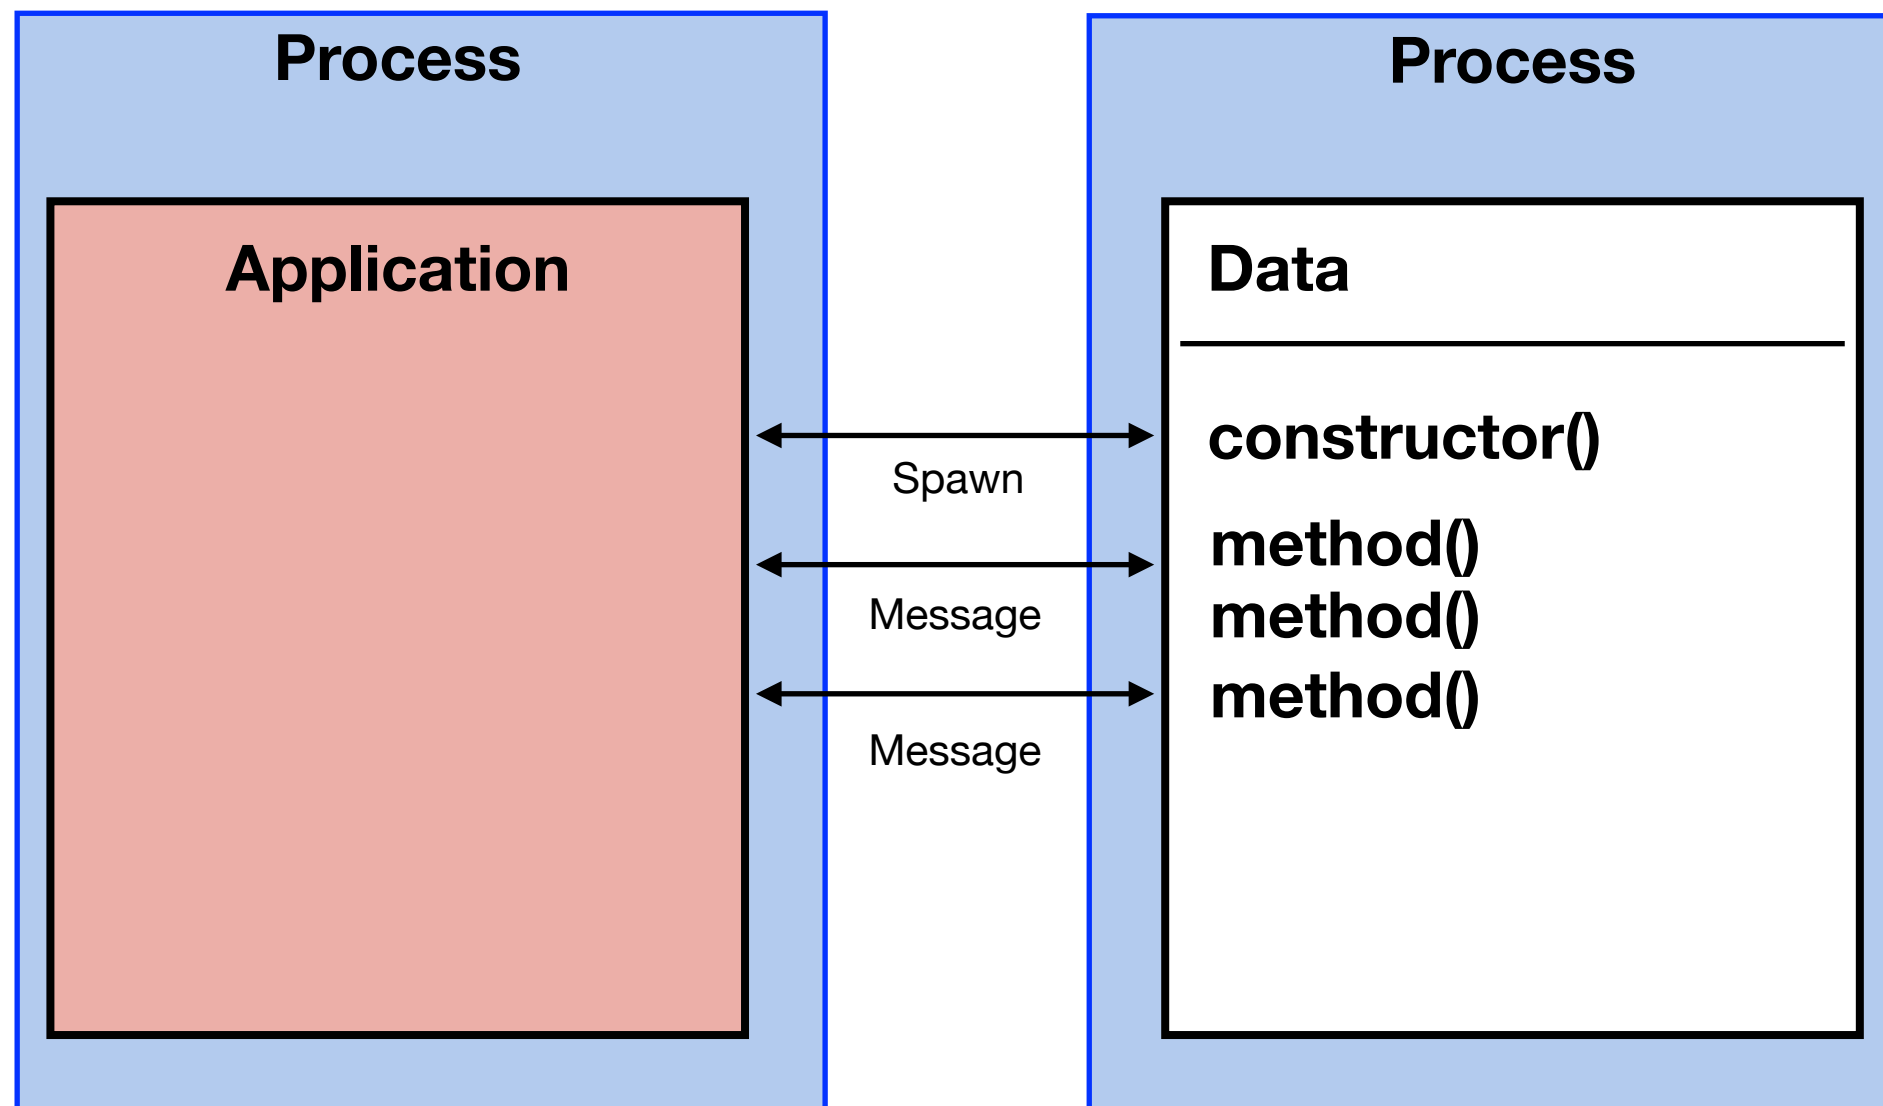

How to implement this in Elixir

- The process containing the object is started using the `spawn/3` function.
- Method calls and responses are replaced by messages.
`send(PID or Name, data)`
- The object maintains its internal data in a tail recursive loop.