

Computer Vision 2019 Fall

Homework #2

B06902059 資工三 謝宜儒

Description

This homework focuses on some basic image manipulations, which are done pixel-wise.


Results

Part 1

(a) a binary image (threshold at 128)



(b) a histogram

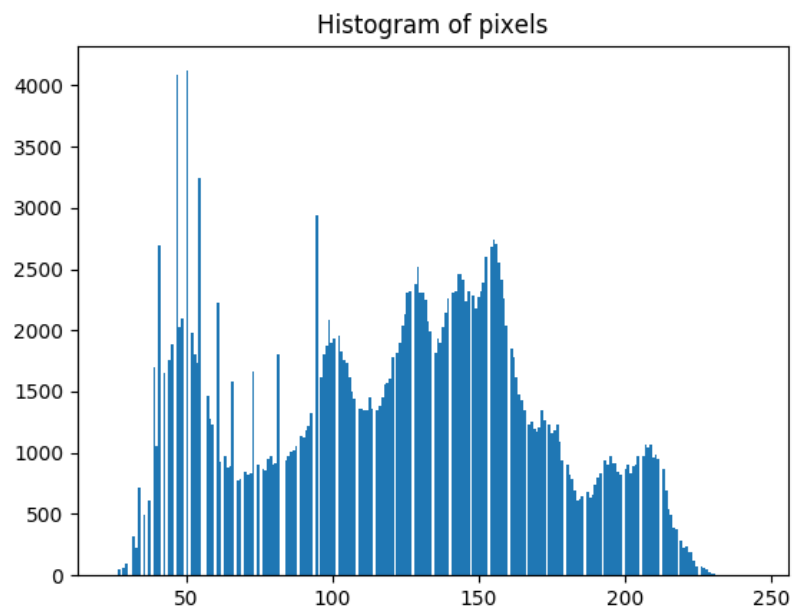

(c) connected components (regions with circles at centroids and bounding boxes)

The connected components are 4-connected.

The centroids are marked by blue circles and the bounding boxes are marked by green rectangles.



Source Code (fragment)

```
# (a) Binary image
def plot1(img):
    binary_128_image = img.copy()
    threshold = 128
    for i in range(length):
        for j in range(width):
            if(img[i][j][0] < threshold):
                binary_128_image[i][j] = [0, 0, 0]
            else:
                binary_128_image[i][j] = [255, 255, 255]
```

```

cv2.imwrite('01_binary_128.bmp', binary_128_image)
cv2.imshow('Binary at 128 image', binary_128_image)
cv2.waitKey(0)
cv2.destroyAllWindows()

# (b) Histogram
def plot2(img):
    pixels = []
    for i in range(length):
        for j in range(width):
            pixels.append(img[i][j][0])

    plt.hist(pixels, bins = 255)
    plt.title('Histogram of pixels')
    plt.savefig('02_histogram.png')
    plt.show()

# (c) Connected components
def plot3(img):
    binary_128_image = img.copy()
    labels = np.zeros((length, width))
    threshold = 128
    for i in range(length):
        for j in range(width):
            if(img[i][j][0] < threshold):
                binary_128_image[i][j] = [0, 0, 0]
            else:
                binary_128_image[i][j] = [255, 255, 255]
                labels[i][j] = 1

    visited = np.zeros((length, width))
    for i in range(length):
        for j in range(width):
            if(labels[i][j] == 1 and visited[i][j] == 0):
                pixel_count = 0
                x_sum, y_sum = i, j
                stack = []
                stack.append([i, j])
                visited[i][j] = 1
                left, right, upper, lower = 0, width - 1, i, length - 1
                while(len(stack) != 0):
                    v = stack.pop()
                    vi, vj = v[0], v[1]
                    x_sum += vi
                    y_sum += vj
                    pixel_count += 1
                    left, right = max(vj, left), min(vj, right)
                    upper, lower = max(vi, upper), min(vi, lower)

                    if(vj > 0 and labels[vi][vj - 1] == 1 and visited[vi][vj - 1] !=
1):
                        stack.append([vi, vj - 1])

```

```

        visited[vi][vj - 1] = 1
        if(vj < width - 1 and labels[vi][vj + 1] == 1 and visited[vi][vj +
1] != 1):
            stack.append([vi, vj + 1])
            visited[vi][vj + 1] = 1
        if(vi > 0 and labels[vi - 1][vj] == 1 and visited[vi - 1][vj] !=
1):
            stack.append([vi - 1, vj])
            visited[vi - 1][vj] = 1
        if(vi < length - 1 and labels[vi + 1][vj] == 1 and visited[vi + 1]
[vj] != 1):
            stack.append([vi + 1, vj])
            visited[vi + 1][vj] = 1

    if(pixel_count >= 500):
        cv2.rectangle(binary_128_image, (left, upper), (right, lower),
            (0, 255, 0), 3)
        centroid_x, centroid_y = int(x_sum / pixel_count), int(y_sum /
pixel_count)
        cv2.circle(binary_128_image, (centroid_y, centroid_x), 10, (255, 0,
0), 3)

cv2.imwrite('03_connected_component.bmp', binary_128_image)
cv2.imshow('Connected component with borders', binary_128_image)
cv2.waitKey(0)
cv2.destroyAllWindows()

```

To run the source code, type the following line in a terminal:

```
python3 hw2.py [input image] [problem number]
```

Reference

<https://blog.gtwang.org/programming/opencv-drawing-functions-tutorial/>