


Chapter 13: File-System Interface



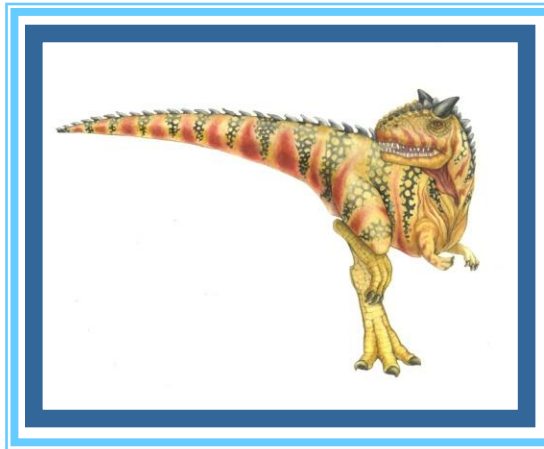

Chapter 13: File System Interface

- ❑ File Concept
- ❑ Access Methods
- ❑ Disk and Directory Structure
- ❑ File-System Mounting
- ❑ File Sharing
- ❑ Protection





Objectives

- ❑ To explain the functions of file systems
- ❑ To describe the interfaces to file systems
- ❑ To discuss file-system design tradeoffs, including *access methods*, *file sharing*, and *directory structures*
- ❑ To explore file-system protection





File Concept

- Contiguous logical address space
- Types:
 - Data
 - ▶ numeric 数字
 - ▶ character 字符
 - ▶ binary
 - Program
- Contents defined by the file's creator
 - Many types, consider text file, source file, executable file
文本文件. 源文件. 可执行文件.





File Attributes 文件属性.


标识符

- ❑ **Name** – information kept in human-readable form
- ❑ **Identifier** – unique tag (number) identifies files within a file system
- ❑ **Type** – needed by systems that support different types
- ❑ **Location** – pointer to file location on device
- ❑ **Size** – current file size
- ❑ **Protection** – controls who can do reading, writing, executing, etc.
- ❑ **Time, date, and user identification** – data for protection, security, and usage monitoring
- ❑ Information about files are kept in a **directory structure**, maintained on the disk - part of which currently in use can be cached in main memory for fast access
- ❑ Many variations, including extended file attributes such as file checksum





File info Window on Mac OS X

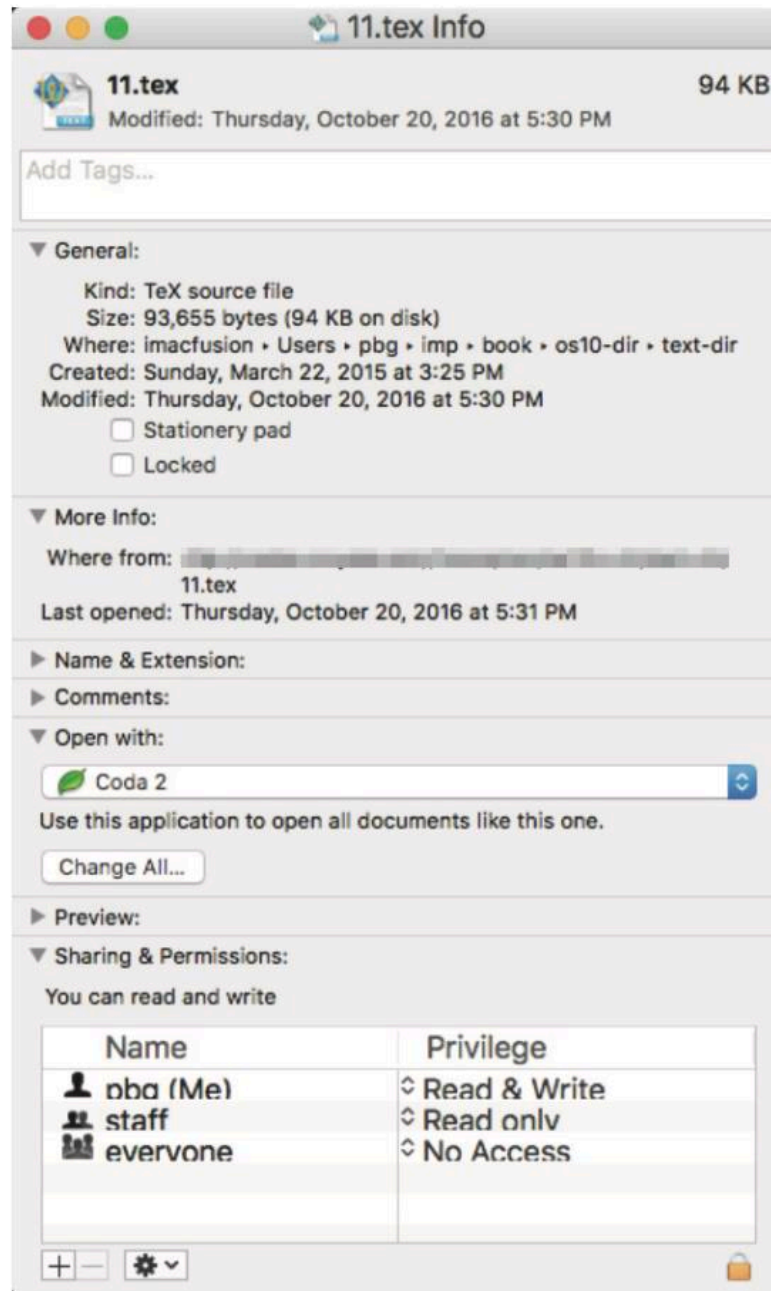



File Operations 文件操作

- File is an **ADT** or **abstract data type** 抽象数据类型
- **Create** – create a file
- **Write** – at **write pointer** location
- **Read** – at **read pointer** location
- **Reposition within file** - **seek**
- **Delete**
- **Truncate** 截断.
- **Open(F_i)** – search the directory structure on disk for entry F_i , and move the content of entry to memory, preparing file for subsequent access
- **Close (F_i)** – move the content of entry F_i in memory to directory 目录 structure on disk

- Such operations involve the changes of various OS kernel data structures





Open Files


- Several data structures are needed to manage open files:
 - **Open-file tables**: ^{跟踪}tracks open files, **system-wide open-file table**, and **per-process open-file table**
 - **File pointer**: pointer to last read/write location, per process that has the file open
 - **File-open count**: counting the number of processes that the file has been opened – to allow removal of data from the open-file table when the last processes closes it (when file-open count is zero)
 - **Disk location of a file**: cache of data access information
 - **Access rights**: per-process access mode information





File Types – Name, Extension

file type	usual extension	function
executable	exe, com, bin or none	ready-to-run machine-language program
object	obj, o	compiled, machine language, not linked
source code	c, cc, java, pas, asm, a	source code in various languages
batch	bat, sh	commands to the command interpreter
text	txt, doc	textual data, documents
word processor	wp, tex, rtf, doc	various word-processor formats
library	lib, a, so, dll	libraries of routines for programmers
print or view	ps, pdf, jpg	ASCII or binary file in a format for printing or viewing
archive	arc, zip, tar	related files grouped into one file, sometimes compressed, for archiving or storage
multimedia	mpeg, mov, rm, mp3, avi	binary file containing audio or A/V information





Access Methods

访问方法

- Sequential Access – simplest access method

顺序访问

```
read next  
write next  
reset
```

no read after last write


(rewrite)

- Direct Access – file is fixed length logical records

```
read  $n$   
write  $n$   
position to  $n$   
    read next  
    write next  
rewrite  $n$ 
```

n = relative block number



- Relative block numbers allow OS to decide where file should be placed
 - See disk block allocation problem in Chapter 14





Other Access Methods

- ❑ Other file access methods can be built on top of **direct-access** method
- ① ❑ Generally, involve creation of an **index** for a file 文件索引.
 - ❑ Keep index in memory for fast location of the data to be operated on
 - ❑ If too large, index (in memory) of the index (on disk)
- ② ❑ **IBM indexed sequential-access method (ISAM)** is an example
 - ❑ Small master index, points to disk blocks of secondary index
 - ❑ File kept sorted on a defined key
 - ❑ All done by the OS
- ❑ VMS operating system provides index and relative files as another example

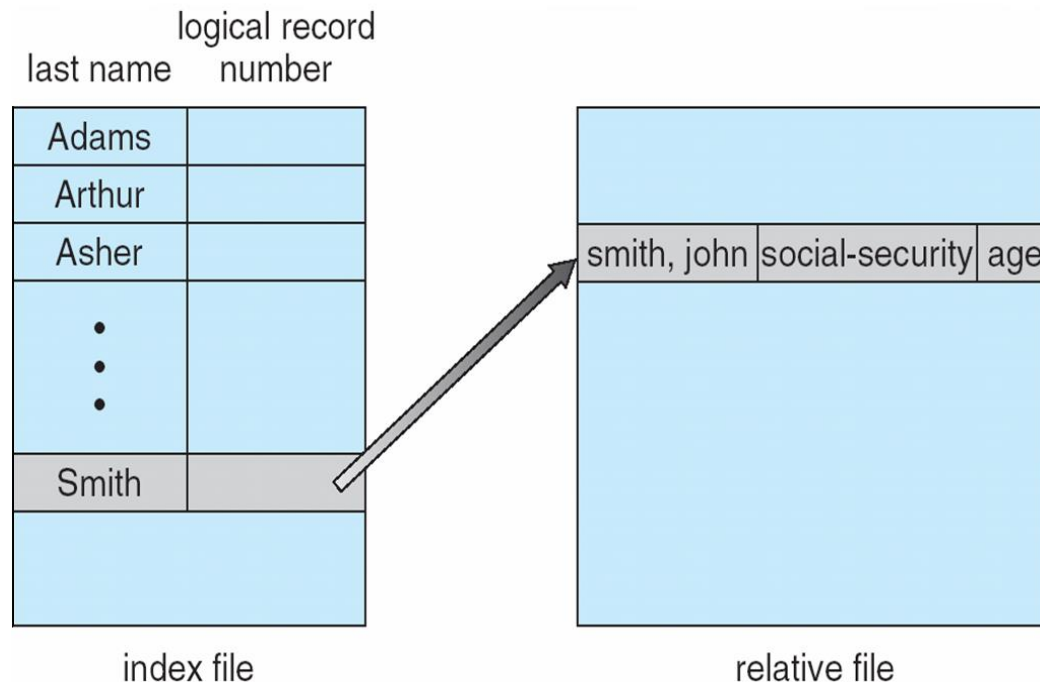




Directory Structure


目录结构

- A collection of nodes containing information about all files

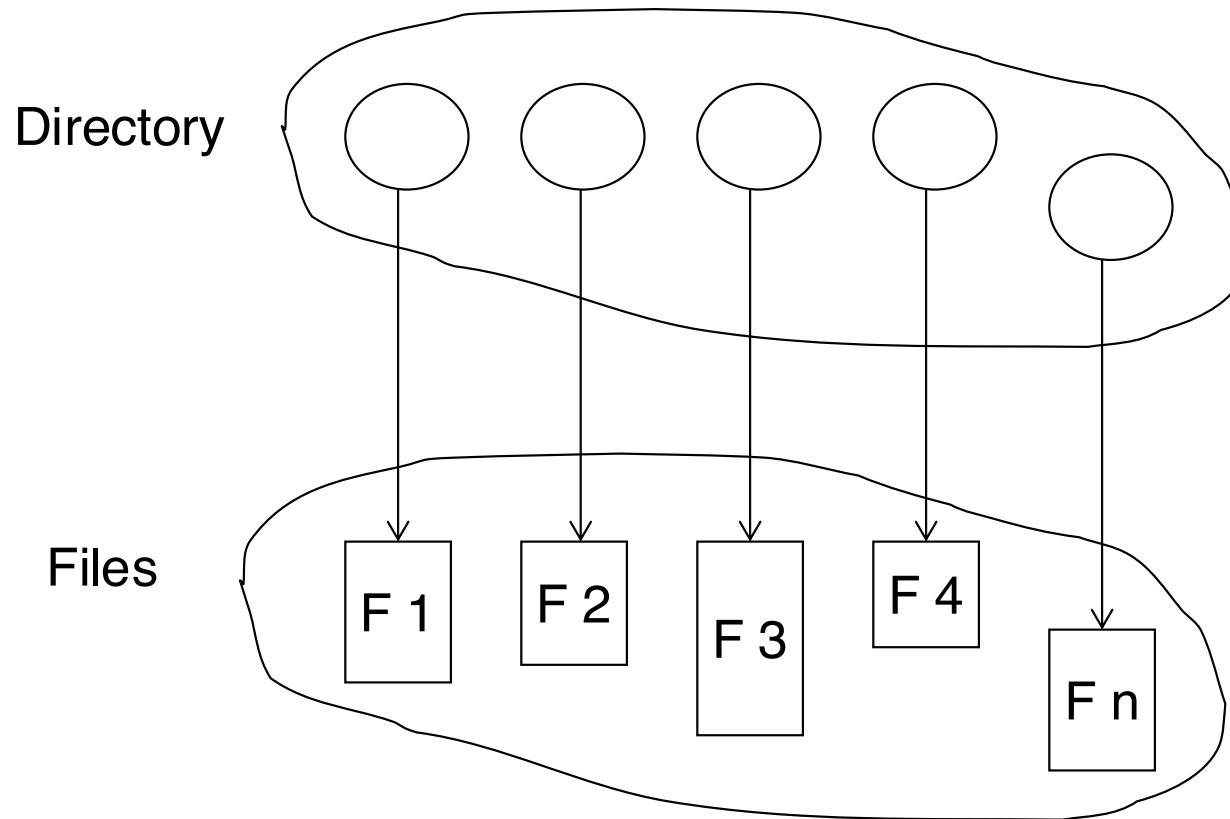

Both the directory structure and files reside on disk

驻留





Disk Structure


磁盘结构

- Disk can be subdivided into **partitions**
- Disks or partitions can be **RAID** protected against failure
- Disk or partition can be used **raw** – without a file system, or **formatted** with a file system
- Partitions ^{分区} are also known as **minidisks**, ^{切片} **slices**
- An entity on a disk containing a file system known as a **volume** 卷.
- Each volume containing a file system also keeps track of the file system info in **device directory** or **volume table of contents**
- Other than **general-purpose file systems**, there are many **special-purpose file systems**, frequently within the same operating system or computing systems





A Typical File-system Organization

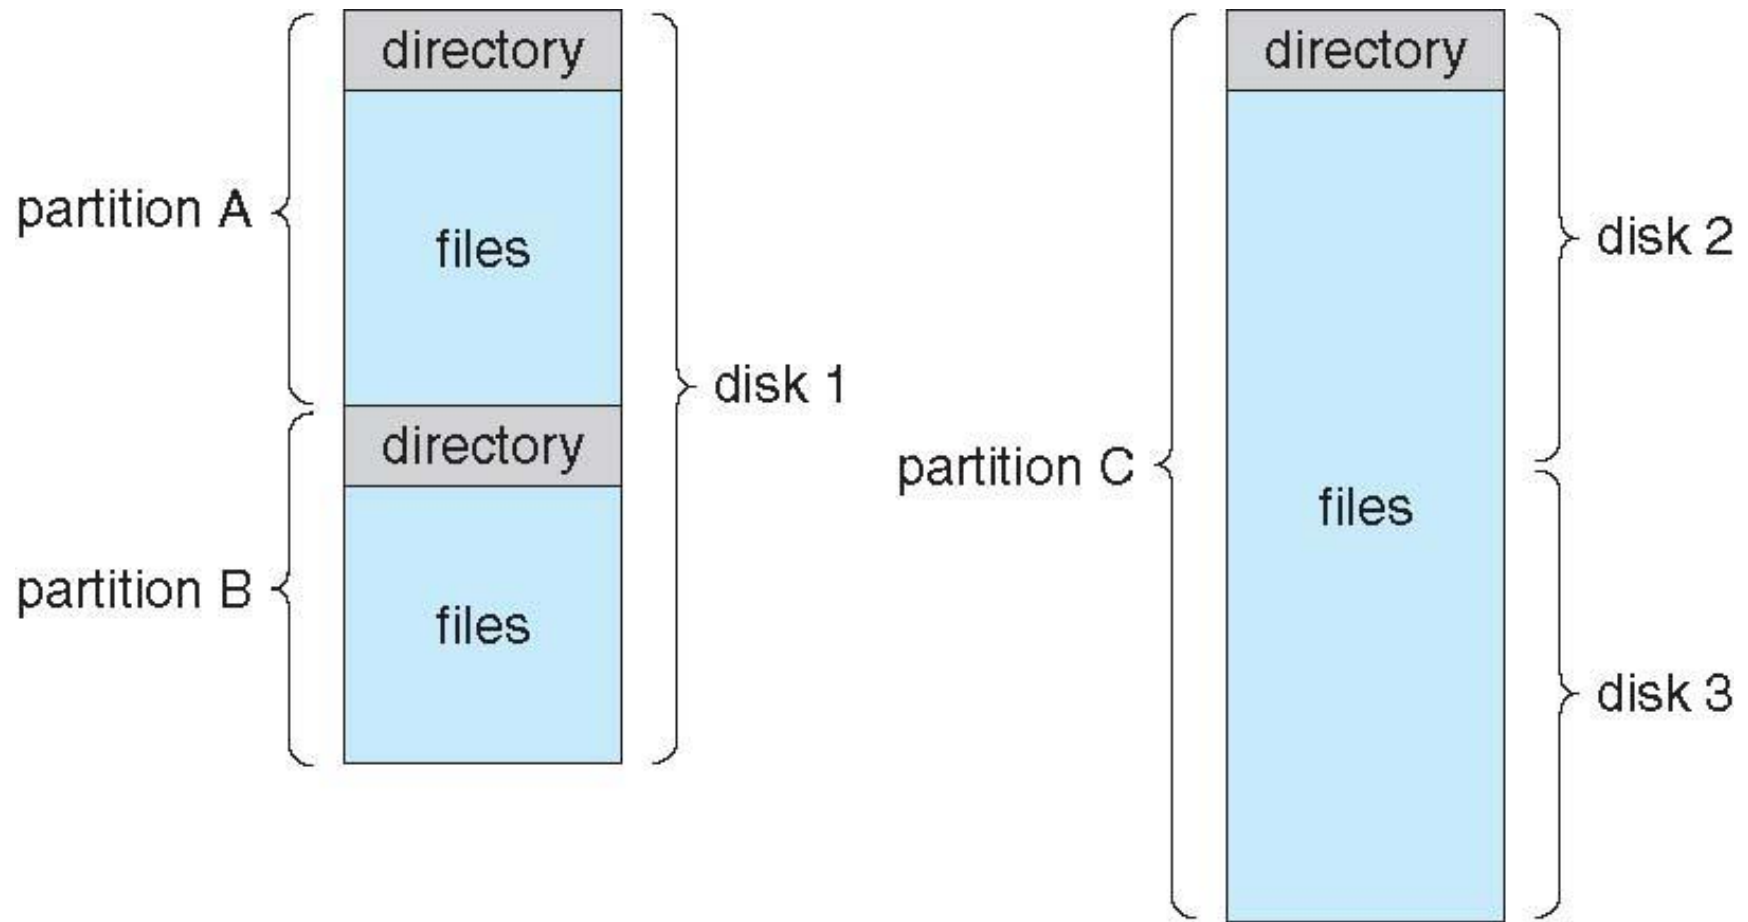



Operations Performed on Directory

- Search for a file
- Create a file
- Delete a file
- List a directory
- Rename a file
- Traverse the file system 遍历文件系统





组织目录以获取

Organize the Directory (Logically) to Obtain

- **Efficiency** – locating a file quickly
- **Naming** – convenient to users
 - Two users can have same name for different files
 - The same file can have several different names
- **Grouping** – logical grouping of files by properties, (e.g., all Java programs, all games, my comp3511, ...)


属性





Single-Level Directory 单级目录

- A single directory for all users

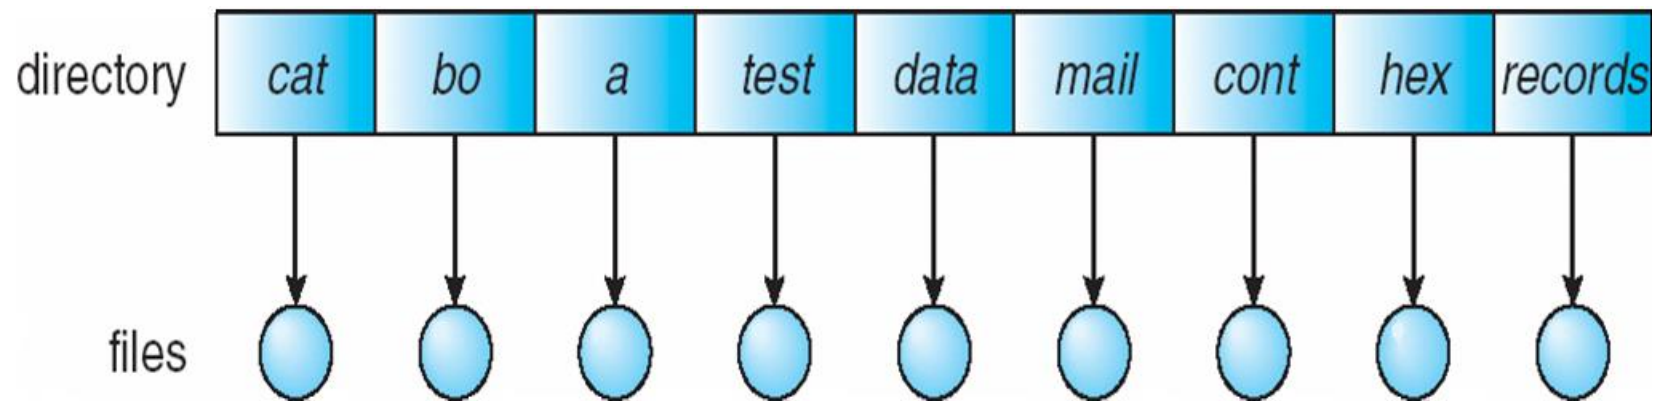

Naming problem


Grouping problem





Two-Level Directory

- Separate directory for each user

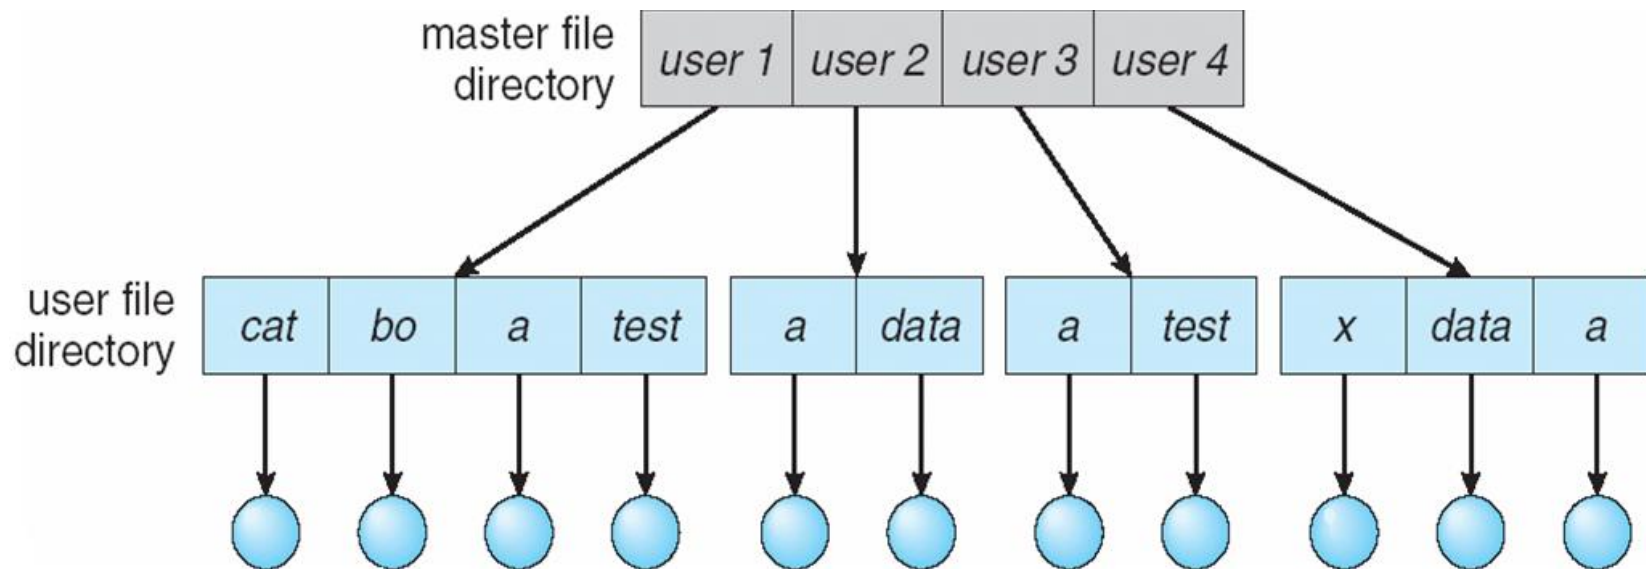


- **Path name** – need a pathname to identify a file/dir, e.g., /user1/cat
- Can have the same file name under different users (paths)
- More efficient searching than single-level directory
- No grouping capability





Tree-Structured Directories 树状结构

目录.

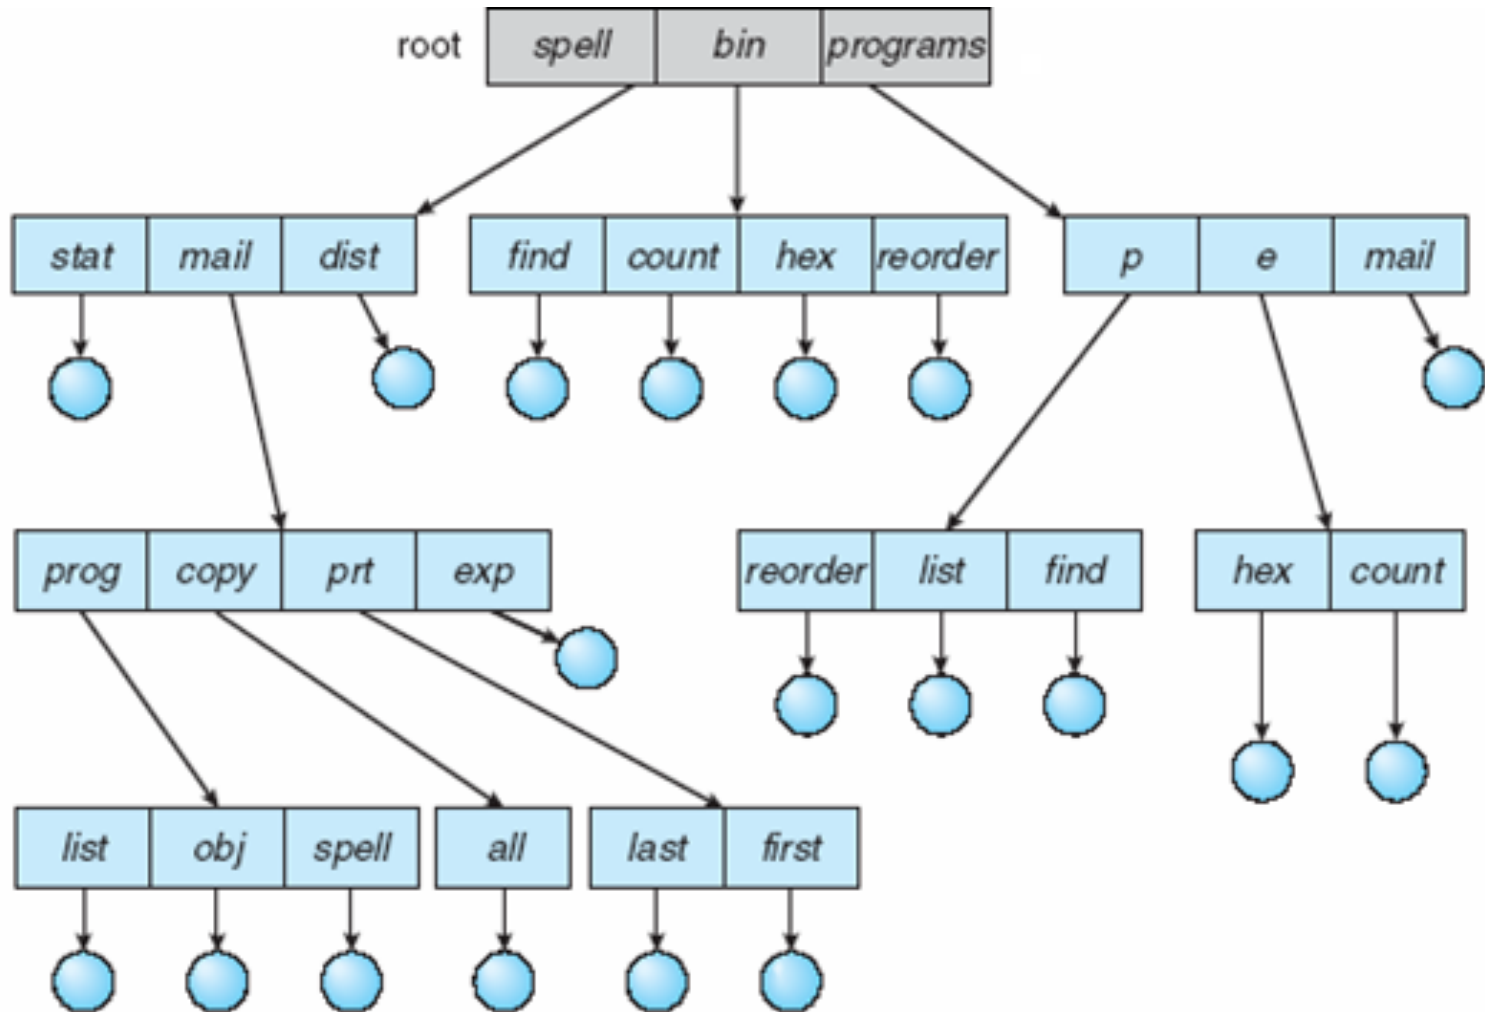



Tree-Structured Directories (Cont.)

- Efficient searching
- Grouping Capability
- Current directory (working directory)
 - `cd /spell/mail/prog`
 - `type list`





Tree-Structured Directories (Cont)


- Absolute or relative path name
- Creating a new file is done in the current directory
- Delete a file in the current directory
- Creating a new subdirectory is done in current directory

`rm <file-name>`

`mkdir <dir-name>`

Example: if in current directory `/mail`

`mkdir count`

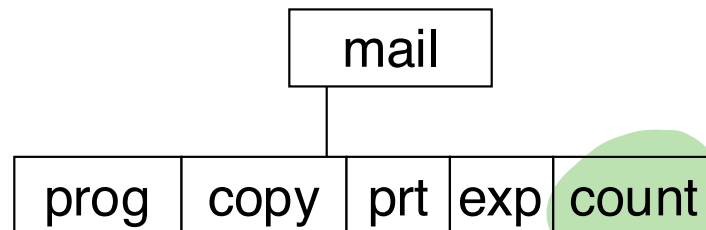



Deleting “mail” ⇒ deleting the entire subtree rooted by “mail”





Acyclic-Graph Directories 无环图目录

- Have shared subdirectories and files – more flexible and complex

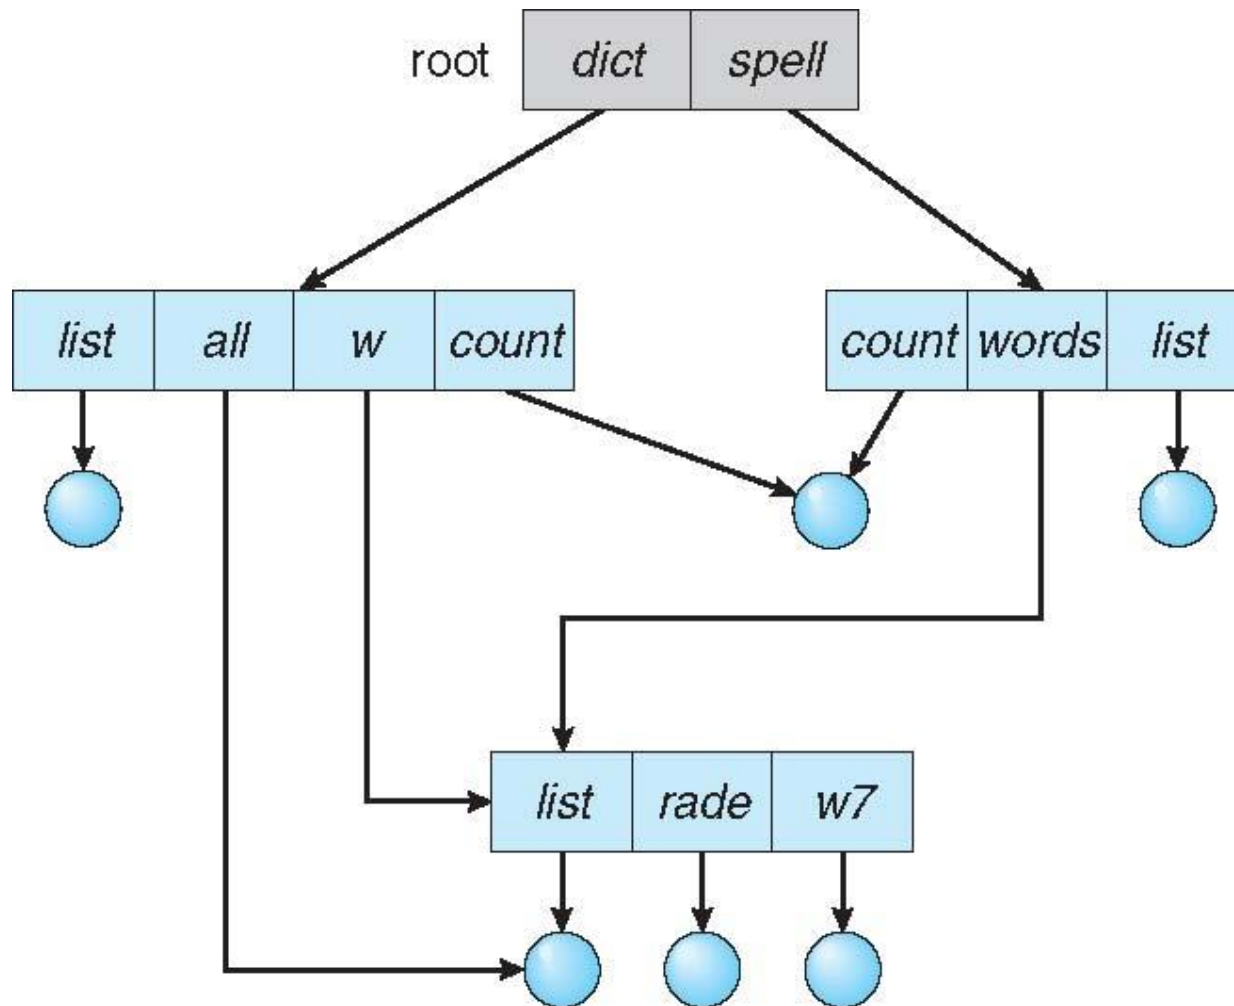





Acyclic-Graph Directories (Cont.)

- New directory entry type 新目录类型
 - Link – another name (pointer) to an existing file
 - Resolve the link 解析 – follow pointer to locate the file
- Two different (path) names (别名 aliasing)
 - Ensure not traversing shared structures more than once
- Deletion might lead to that 悬空指针. dangling pointers that point to empty files or even wrong files
- There is also difficulty ensuring there is no cycles in a graph – complexity associated with it





通用图目录 General Graph Directory

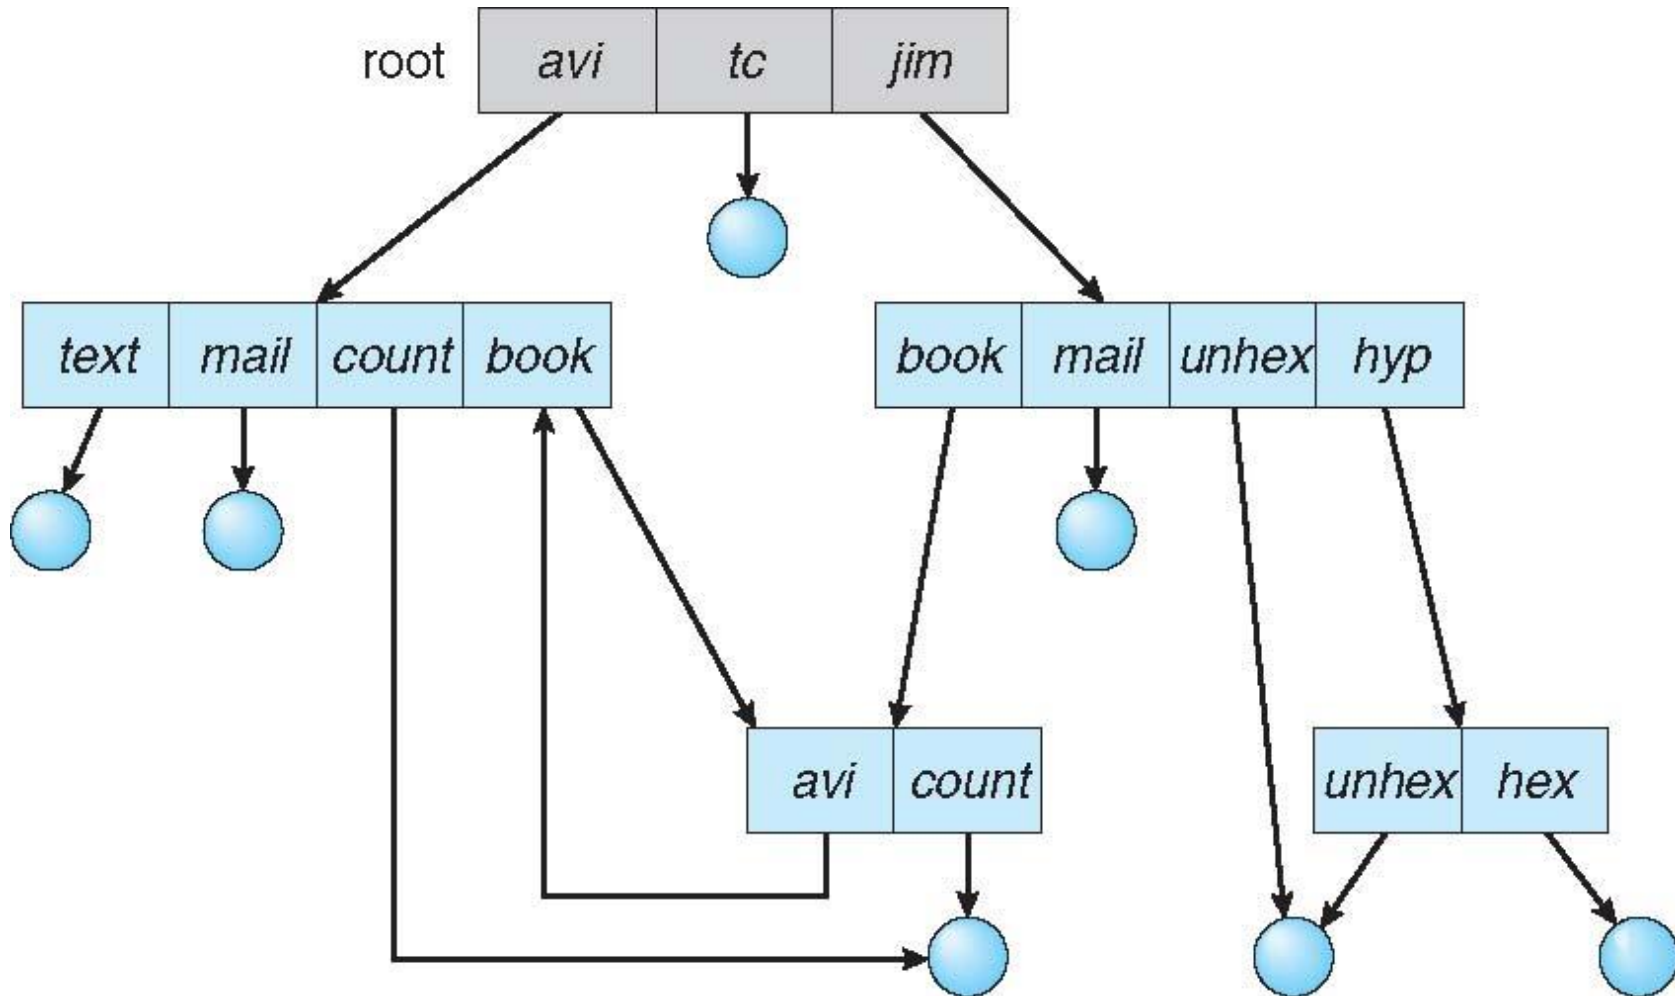



General Graph Directory (Cont.)

- How do we guarantee no cycles?
 - Allow only links to file not subdirectories – sometime not convenient
 - Every time a new link is added use a cycle detection algorithm to determine whether there is a cycle or not – time consuming






File System Mounting


文件系统挂载

挂载


- A file system must be **mounted** before it can be accessed – just like a file must be **opened** before it is used
- An unmounted file system (i.e., Fig. (b)), to be mounted at a **mount point**

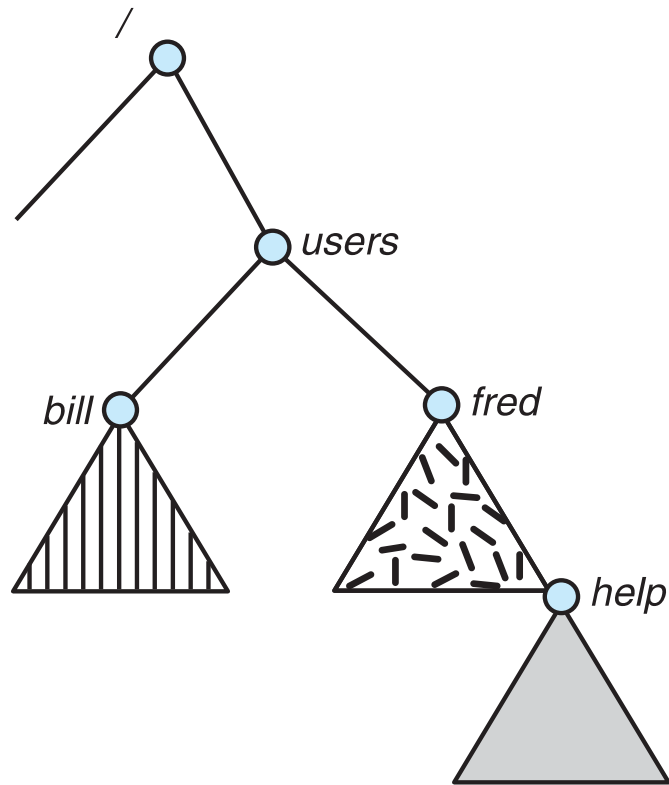

(a)

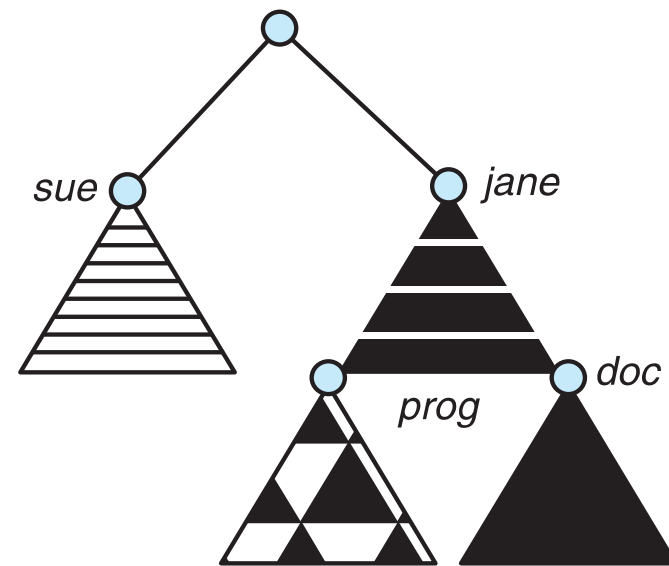

(b)






Mount Point

挂载点

- Volume is mounted at `/users`

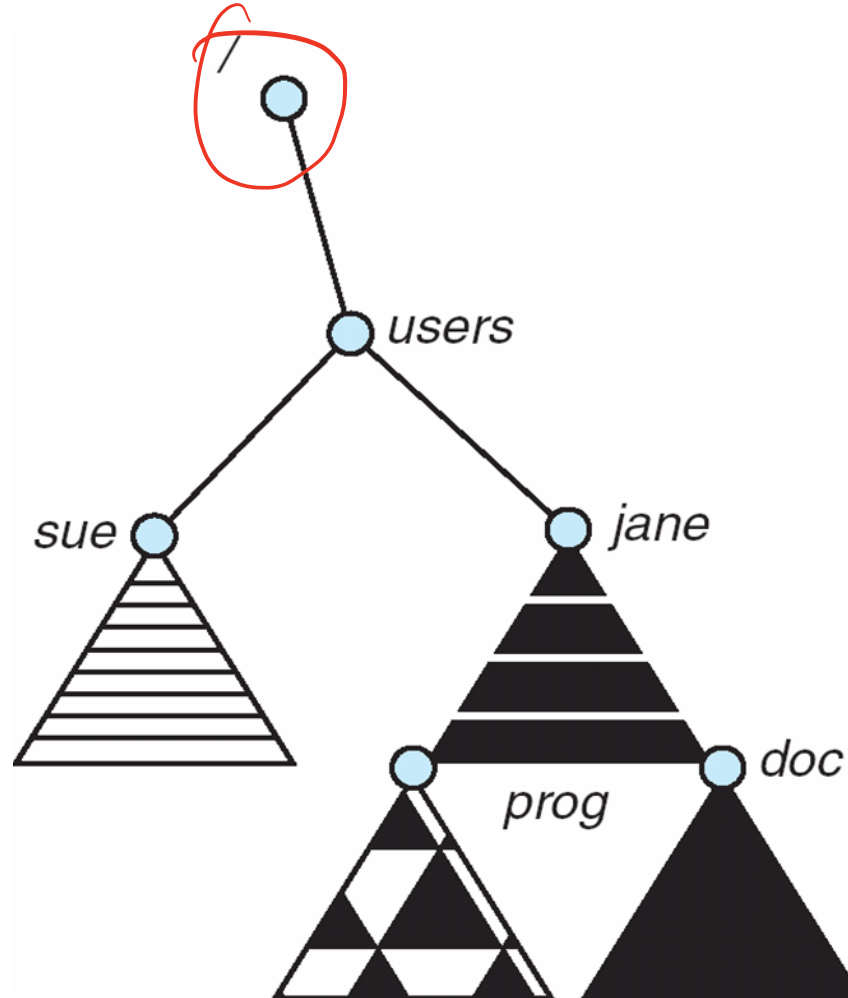



File Sharing

- Sharing of files in multi-user systems is desirable 可取的
- Sharing may be done through a protection scheme 方案
- In distributed systems, files may be shared across a network 分布式
 - Network File System (NFS) is a common distributed file-sharing method
- With a multi-user system
 - User IDs identify users, allowing permissions and protections to be per-user
 - Group IDs allow users to be in groups, permitting group access rights
 - Owner of a file / directory
 - Group of a file / directory





Protection

- File owner/creator of the file should be able to control:
 - what can be done
 - by whom

- Types of access
 - Read
 - Write
 - Execute
 - Append
 - Delete
 - List






Access Lists and Groups

- Mode of access: read, write, execute
- Three classes of users on Unix / Linux

			RWX
a) owner access	7	⇒	1 1 1
			RWX
b) group access	6	⇒	1 1 0
			RWX
c) public access	1	⇒	0 0 1

- Ask manager to create a group (unique name), say G, and add some users to the group.
- For a particular file or subdirectory, define an appropriate access.

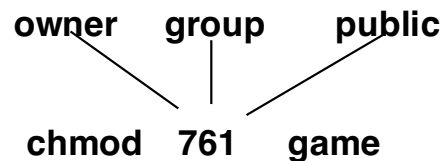



Attach a group to a file

chgrp G game






Windows 10 Access-Control List Management

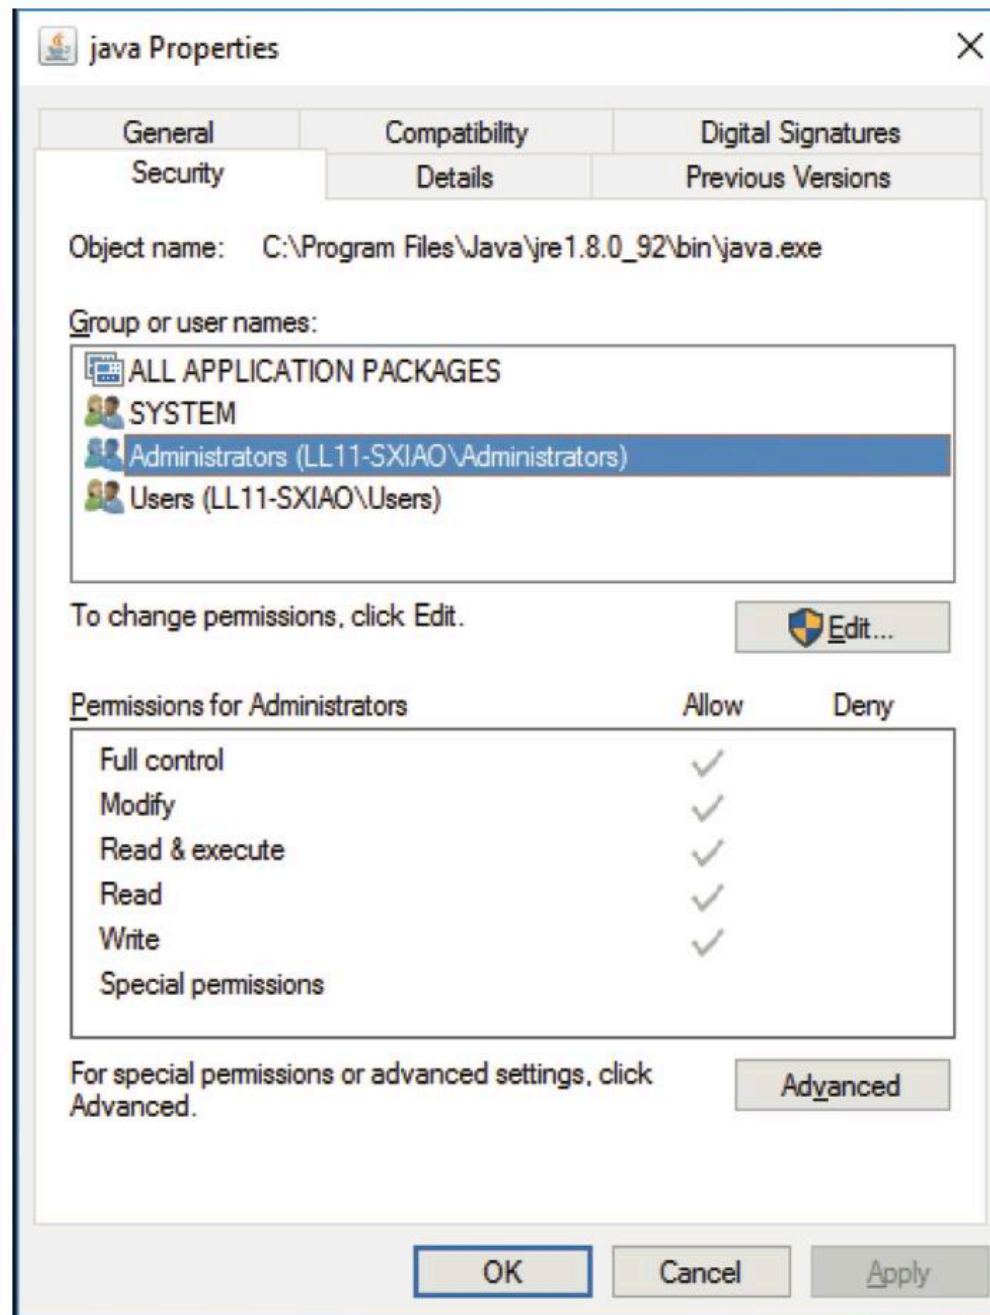



A Sample UNIX Directory Listing

-rw-rw-r--	1	pbg	staff	31200	Sep 3 08:30	intro.ps
drwx-----	5	pbg	staff	512	Jul 8 09:33	private/
drwxrwxr-x	2	pbg	staff	512	Jul 8 09:35	doc/
drwxrwx---	2	pbg	student	512	Aug 3 14:13	student-proj/
-rw-r--r--	1	pbg	staff	9423	Feb 24 2003	program.c
-rwxr-xr-x	1	pbg	staff	20471	Feb 24 2003	program
drwx--x--x	4	pbg	faculty	512	Jul 31 10:31	lib/
drwx-----	3	pbg	staff	1024	Aug 29 06:52	mail/
drwxrwxrwx	3	pbg	staff	512	Jul 8 09:35	test/



End of Chapter 13

