


Every clean pair, data – null, one topology at a time and summed

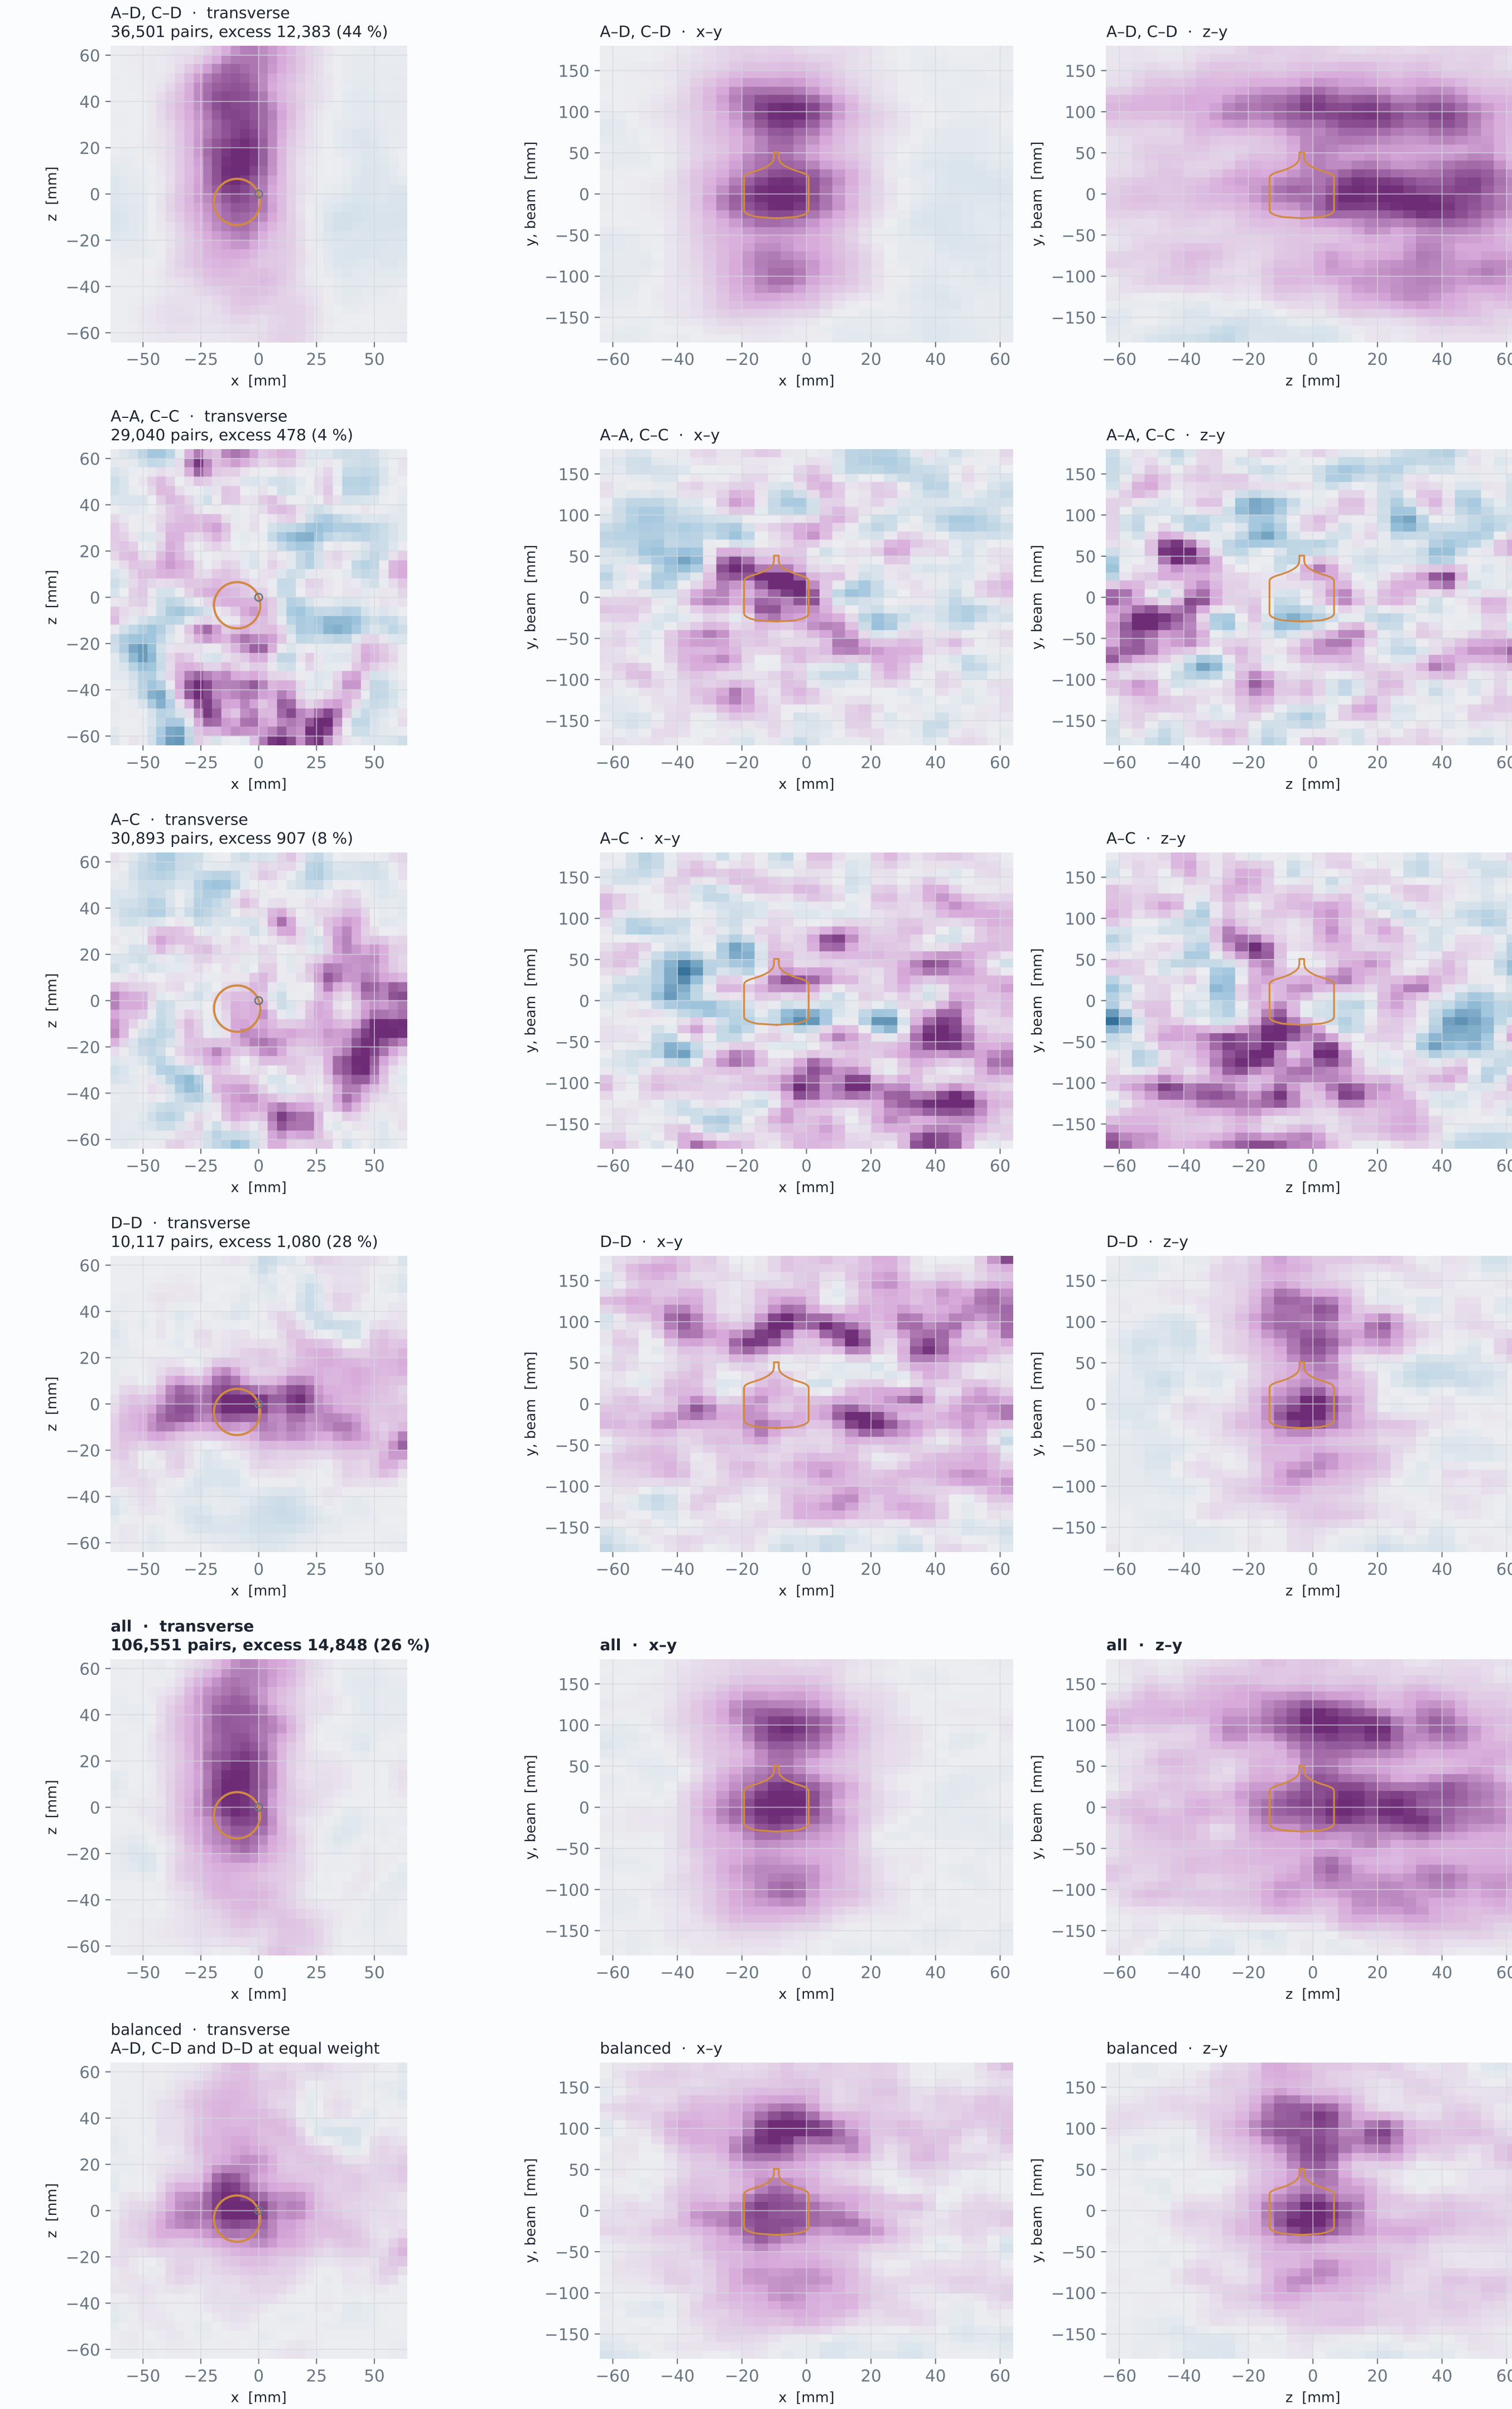

Vertex: transverse crossing, $y = \text{mean of the legs' } y \text{ there}$. Each class's shuffled null is normalised to its data where $|x - cx|$ and $|z - cz|$ both exceed 35 mm and subtracted. Purple: excess; blue: deficit; smoothed by one 4 mm bin. Copper: the capsule at the single-track position. [ntof_athens_26/pair_vertex_imaging](#) | 33 runs of the condor full pass, chambers A, C, D; both legs slope-measured and not in a noisy column, within 60 mm of the axis