


Charles University in Prague
Faculty of Mathematics and Physics

BACHELOR THESIS

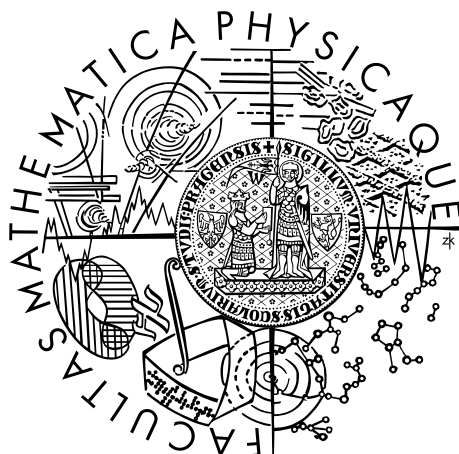

Jaroslav Jindrák

The Dungeon Throne: A 3D Dungeon Management Game

Department of Distributed and Dependable Systems

Supervisor of the bachelor thesis: Mgr. Pavel Ježek, Ph.D

Study programme: Computer Science

Study branch: Programming and Software Systems

Prague 2016

I declare that I carried out this bachelor thesis independently, and only with the cited sources, literature and other professional sources.

I understand that my work relates to the rights and obligations under the Act No. 121/2000 Sb., the Copyright Act, as amended, in particular the fact that the Charles University in Prague has the right to conclude a license agreement on the use of this work as a school work pursuant to Section 60 subsection 1 of the Copyright Act.

In date

signature of the author

Title: The Dungeon Throne: A 3D Dungeon Management Game

Author: Jaroslav Jindrák

Department: Department of Distributed and Dependable Systems

Supervisor: Mgr. Pavel Ježek, Ph.D, Department of Distributed and Dependable Systems

Abstract: Abstract. TODO:

Keywords: dungeon management Lua scripting Ogre CEGUI

Dedication. TODO:

Contents

1	Introduction	2
1.1	Dungeon Managment Genre	2
1.2	Modifiability in Games	4
1.2.1	Mod examples	6
1.3	???	10
1.4	Thesis Goals	10
2	Problem Analysis	12
2.1	Modding Tools	12
2.2	Programming Language	15
2.2.1	Native Language: C++	15
2.2.2	Managed Languages: Java and C#	16
2.3	Scripting Language	17
2.3.1	Lua	17
2.3.2	Python	17
2.3.3	AngelScript	18
2.4	Entity Representation	18
2.4.1	Entity Component System	19
2.4.2	Inheritance	20
2.4.3	Entity Component	21
	Bibliography	22
	Attachments	24

1. Introduction

Until the release of Dungeon Keeper¹ most well known fantasy video games have allowed the player to play as various heroic characters, raiding dungeons filled with evil forces in order to aquire treasures and fame. In Dungeon Keeper, however, we join the opposite faction and try to defend our own dungeon (along with all the treasures hidden in it) from endless hordes of heroes trying to pillage our domain. Although we can still play the original Dungeon Keeper today, we cannot change its data or game mechanics in any easy way so this thesis aims to recreate and modify the original game and extend it to have an easy to use programming interface that will allow such modifications.

1.1 Dungeon Managment Genre

Dungeon Keeper was the first game released in the dungeon management (DM) genre and since our game is going to be based on Dungeon Keeper, we should design it with the elements of its genre in mind. Since the definition of this genre has to our knowledge never been formally documented by the creators of Dungeon Keeper, we are going to create a list of basic elements of the genre based on the gameplay of the original game.

In Dungeon Keeper, the player's main goal is to build and protect his own base, called the dungeon. They do so by commanding their underlings (often called minions), whom they can command to mine gold, which is a resource they use in order to build new rooms and cast spells (in the game's sequel², mana was added into the game as a secondary resource used for spell casting), which could be researched as the game progressed. They would then use creatures spawned in their buildings as well as their own magic powers to fight intruders in order to protect their dungeon. From this brief gameplay summary, we can create list of the most basic design elements, which can be found in dungeon management games:

- (E1) Resource management
- (E2) Dungeon building
- (E3) Minion commanding
- (E4) Combat
- (E5) Player participation in combat
- (E6) Research

Now that we have created a list of the genre's basic design elements, let us have a look at how they were implemented in games from the Dungeon Keeper series.

¹Bullfrog Productions, 1997

²Dungeon Keeper 2, Bullfrog Productions, 1999

Resource management

In the original Dungeon Keeper, the player used gold as their primary resource. They would have it mined by their minions and use it to build new rooms and cast spells. While having a single resource for everything may bring simplicity to the game, it also means that once the player runs out of gold, they will not be able to directly participate in combat due to their inability to cast spells. It is for this reason that we are going to use the resource model of Dungeon Keeper 2 and have a separate resource – mana – that will be used to cast spells.

Dungeon building

The term dungeon building in Dungeon Keeper refers to tearing down walls in order to create new rooms which the player's minions then claim and the player can place new buildings in. These buildings can then act as gold storage, spawn new creatures or be used as traps that negatively affect attacking enemies. Since this is a central theme in Dungeon Keeper (and dungeon management games in general), we should try to implement our building model to resemble this one.

Minion commanding

The term minion commanding stands for giving your minion tasks such as to move somewhere, attack an enemy or tear down a wall. In Dungeon Keeper, most of these commands were implemented as spells – although mining was done by simply selecting blocks, which could unfortunately cause minions to destroy walls the player accidentally selected. To provide a unified interface to minion tasks and to avoid the accidental block destruction, all commands the player can give should be in our game implemented as spells.

Combat

In Dungeon Keeper, the player's dungeon is under frequent attacks by enemy heroes. These enemies attack the dungeon in groups with a delay between each two attacks, in a similar way to tower defense games (e.g. Orcs must die! [1] and Dungeon Defenders [2]), where they are often referred to as *waves*. Each wave of enemies can consist of different types of heroes and the delay between waves can differ, too. Since the players of the original Dungeon Keeper are already familiar with this wave system and it may also satisfy the players of tower defense games, we will be implementing it in our game.

Player participation in combat

During the fights with enemy heroes, the player in Dungeon Keeper can cast various spells to affect the outcome of the battle. These spells can have various forms from spawning creatures, damaging enemies and healing minions to destroying walls and throwing meteors. If we want to create a similar spell system, we need to support these different types of spells, e.g. targeted spells that affect a single entity, positional spells that can summon a creature or global spells, that simply have an effect on the game once they are cast.

Research

In the original *Dungeon Keeper*, researching new spells and buildings was done through a special type of room, called the library, which can be seen in Figure 1.1. There, various minions could study and achieve new advancements for the player after a certain amount of research points – which was different for different spells and buildings – was gathered. But this design decision brought a negative element into the game, because once the library was destroyed by the heroes, the player was unable to perform additional research and could not even use the ability to cast some spells. This is why we are going to use a different approach, called the research tree (or sometimes the technology tree), first used in the turn-based strategy game called *Sid Meyer’s Civilization*³, as pointed out by Tuur Ghys in his article about technology trees [3]. This approach separates the research from the events happening in the game and allows the player to research new advancements for a resource (e.g. gold), with each new technology, building, creature or spell being able to have prerequisites.



Figure 1.1: Warlocks researching in the library.

Source: <http://dungeonkeeper.wikia.com>

1.2 Modifiability in Games

One of our basic goals is for our game to be modifiable, which means to provide tools – often called *modding tools* – to our players that will allow them to create modifications – often called *mods* – that other players can install and which can change or add elements to the game.

This can increase the replay value of the game as after finishing it, more missions, characters, game mechanics, abilities, items or even game modes can be easily downloaded and installed from internet. Since we want our game to be modifiable as much as possible, an important topic we need to decide on is

³Developed by MPS Labs, 1991

which parts of the game we will allow the players to modify. An example of an easily modifiable game is Minecraft [4], a 3D sandbox game in which the player has to survive in a procedurally generated world. Let us now examine the basic concepts of the game before we investigate concrete examples of mods and how they changed the game in the following sub chapters. As a reference, a screenshot of Minecraft can be seen in Figure 1.2.



Figure 1.2: Screenshot of Minecraft.
Source: <http://www.neoseeker.com>

In the screenshot we can see a player standing in the game’s world, equipped with an iron sword that can be used for self-defense when the player is attacked by enemies or to kill animals in order to acquire food required to restore one’s health, standing next to a hill and a couple of trees. Everything in the game is made of *blocks*, which are items that can be placed in the world and – with some exceptions⁴ – destroyed so that the player can place them in their inventory. They can either be used for building or they can be interactive, which the player can right click on to trigger their functionality – e.g. show a special window or change their state. An example of an interactive block is the chest block, which provides additional item storage when the player interacts with it.

In the bottom part of the screen we can see the hotbar, which the player can use to store commonly used items like tools – e.g. a pickaxe, which is used to mine blocks, or an axe, which is used to cut down trees and allows the player to harvest wood – and blocks, which can be used for building or crafting.

Crafting is an important part of Minecraft. It allows the player to create tools and complex blocks by combining one or more crafting ingredients – e.g. wood, stone, iron or food. The crafting system in the game is based on different crafting recipes, which restrict what items and in what composition on the game’s crafting window – either a two by two window in the player’s inventory screen or three by three window shown when the player uses a special interactive block called the crafting bench.

Figure 1.3 shows an example of such crafting recipe, specifically the pickaxe crafting recipe. The existence of this recipe in the crafting system means that if a player interacts with the crafting bench and places two wooden sticks and three

⁴E.g. the bedrock block, which covers the bottom layer of the world and prevents the player from falling outside of the world’s boundaries

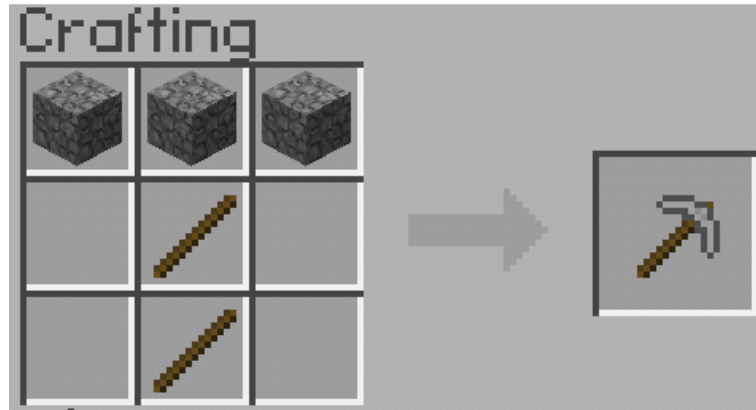


Figure 1.3: An example of a crafting recipe in Minecraft, the player can create a stone pickaxe by combining two wooden sticks with three stone blocks.

Source: <http://thecoolestminecrafters.weebly.com>

stone blocks – although different resources like iron or gold bars can be used for a different type of pickaxe – in the layout shown in the picture, the crafting bench will produce a stone pickaxe in exchange for the resources.

1.2.1 Mod examples

There are thousands of different minecraft mods – for example, the mod repository at Curse.com [5] contains over 4 thousand mods and the one at Planet-Minecraft.com [6] contains even over 7 thousand different mods. To find the right moddable features of our game, we will now look at some examples of these mods and see how they change Minecraft.

Industrial Craft 2

The first example is called Industrial Craft 2 [7]. This mod adds new blocks and tools as well as a new game mechanic – the concept of electricity – to the game. The items added by the mod range from simple ones like new types of armor or new tools to complex blocks like various electricity generators and automatized machines.

An example of such machine is the electric furnace. In the game without mods, the player gets iron and other metals in the form of a raw ore when they mine a block containing the metal. To use the metal in a crafting recipe, the players needs to smelt the ore into a bar using the furnace, which can be powered by wood or coal. The electric furnace uses electricity for power and can be powered by an electricity generator – e.g. a solar panel – which removes the necessity to repeatedly place wood or coal in the machine.

In Figure 1.4, we can see a simple setup in which a couple of solar panels are connected to an electric furnace and other machines via glass fibre cables. We can also see another interactive block added by the mod – the battery block. The battery block stores electricity up to a certain capacity and continues powering the machines even when its electricity input stops, which in the case of solar panels can happen during the night.

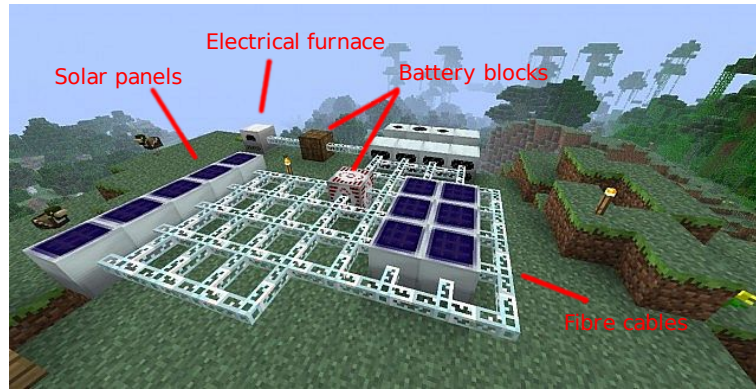


Figure 1.4: A simple setup powering multiple machines including an electrical furnace using solar panels.

Source: <http://www.planetminecraft.com>

Using these machines, the game can be changed from its rather primitive setting – in which the player mines resources with simple tools and builds simple houses – to a modern setting with automated mining and resource processing machines. If we want to allow the players of our game to create similar modifications, they should be able to change existing and create new buildings – our equivalent of Minecraft’s blocks – which includes changing their appearance, the way they function – e.g. what type of minions they spawn – and how they interact with enemies.

Computer Craft

Another mod, called ComputerCraft [8], added fully functional computers into the game. These computers can be used to create password protected doors, write programs and games in the Lua programming language [9] or even connect to internet services such as IRC⁵ or telnet⁶.

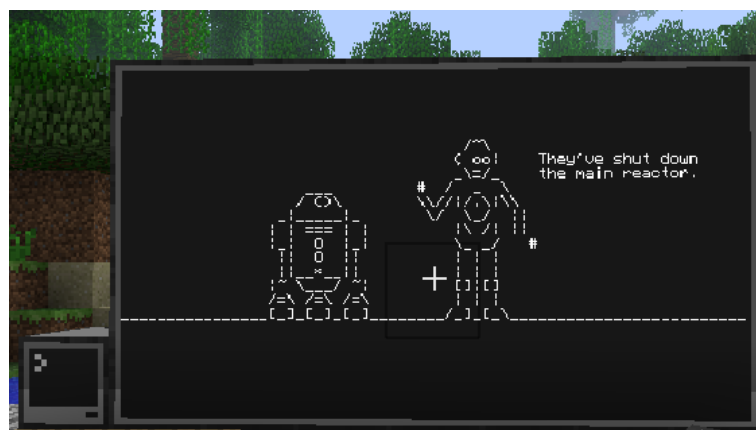


Figure 1.5: A computer in Minecraft playing the ASCII version of the movie Star Wars: A New Hope.

Source: <http://www.minecraft-modding.de>

⁵Internet Relay Chat, an open communication protocol.

⁶A client-server protocol, that allows bidirectional text-oriented communication through a terminal.

An example of such computer in minecraft can be seen in Figure 1.5. There, a player has connected a computer to a screen and used the computer to connect to a server via telnet. The server then sent back messages that, when displayed sequentially, played the first Star Wars movie.

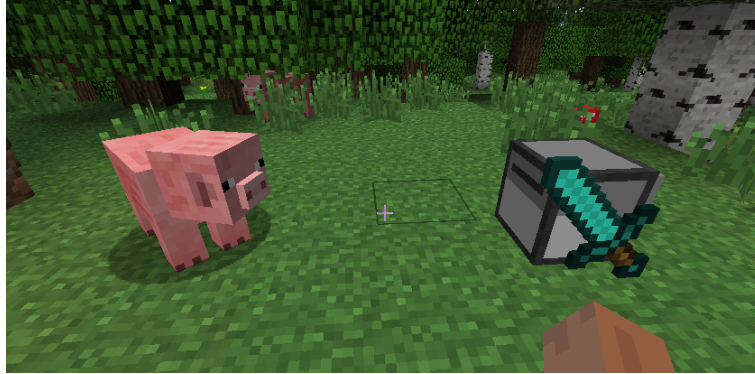


Figure 1.6: A turtle equipped with a diamond sword about to attack a pig.
Source: <http://www.computercraft.info>

This mod also added robots into the game. These robots – called *turtles*, inspired by the Logo programming language – could be programmed using Lua scripts to automate various tasks. The task a turtle fulfills is determined by the tools it is equipped with. If, for example, the player gives it a pickaxe, the turtle will then be able to mine blocks and being equipped with an axe will allow it to chop down trees. In Figure 1.6, we can see another type of turtle, this time equipped with a sword. The mod provides the player with an API in which they can write instructions for the turtle. If, for example, these instructions were in this case ‘walk three times forward and attack’ – written in Lua – the turtle would walk forward and killed the pig standing in front of it.

We have already decided to allow our players to modify the buildings in our game, based on the machines in Industrial Craft 2. From Computer Craft, we are going to take the concept of minion and enemy modification. This means that the players of our game should be able to change the attributes of both minions and entities in the game, including attributes such as health and damage, abilities, spells and most importantly, their overall behavior (i.e. their artificial intelligence).

Team Fortress 2 Map

Aside from adding items and creatures, entire new games can be created within a modifiable game. One of the interactive blocks in Minecraft is command block, which can execute commands in the game’s developer console – e.g. teleport the player to a certain position or give him items – when the player right clicks it.

One of the players of the game, called Seth Bling, used this block to create a map which alters the way the game is played [10]. For example, even though the unmodded game has no concept of character classes, he used the command block to equip the player that clicked on it with a special set of tools and weapons, using the command to add items. With multiple of these blocks – each with a different set of items – allowed him to emulate classes in the game. Then, using the same block with different setting, he created control points which the players

could stand on to capture them. Using these control points he was then able to alter the game's winning condition, which was originally to kill a specific enemy, to a requirement team of players having all control points in the world under their control. Once all control blocks were controlled by the same team, another command – requesting the game's end – would be executed.

The result of these modifications was the change of Minecraft to look and play like another game, called Team Fortress 2 [11]. Team Fortress 2 is a 3D first person shooter, in which two player teams fight against each other in various game modes, e.g. the aforementioned point control. Each player in the game can choose from a wide selection of character classes, each with its own attributes and weapons.

Unlike Industrial Craft 2 and Computer Craft, which only added new items and non-player characters into the game, this map mainly altered two aspects of the game. Firstly, it changed the way the player plays the game by limiting them to a specific number of different classes they can play, bringing diversity to the game's online play. Secondly, it changed the way the game ends, i.e. under what condition the player wins or loses.

From this map, we are going to take the ability to modify these exact two aspects. While the change of the game's end condition can be done similarly to the way it was done in this game – i.e. executing a custom command to win or lose the game, the change of the play style can not be done by item restriction because in our game the player has no items. The way that, in our game, the player interacts with the world is through their spells – which include entity commanding. This means that alongside building, minion, enemy and end condition modification, our players should be able to change their spells and create new ones. These changes should be able to affect the gameplay, so they should range from simple damage and range modification to complete changes of the effects these spells have on the world.

One important note is that this change of gameplay was not done by creating a mod but was created as a map for the game, which the players could download from internet and then simply load in the game without any installation. This way of distribution of changes to the game, alongside modding, creates another way for the players of a game to create and share modifications of the game. Since we want our game to be modifiable, we should implement a way for our players to create similarly game changing maps in our game, i.e. we should store our levels in a format that will allow later modifications, including actual changes to the game's elements.

Conclusion

In conclusion, we can see that the ability to modify a game can help said game to grow even when its development has stopped or is focused in different areas (e.g. security, stability). Since we want to give this ability to the players of our game, our modding tools should allow them to change some of its data, including but not limited to:

- Minions and enemies – e.g. changing attributes such as health and damage, displayed models, behavior and spells they cast.

- Buildings – e.g. changing their size, models, types of creatures that they spawn and, in the case of traps, their interaction with enemies.
- Spells – fully changing the effect of a spell, e.g. from simple damage dealing to spawning a meteor shower.
- Goals of the game – changing requirements for winning the game or the reasons for a loss.

Besides changing data of entities – e.g. creatures, buildings or spells – the players should also be able to create new types of these entities.

The game on its own, like Minecraft, should also be fully featured, offering enough of these entities on its own so the players do not need mods to actually play the game. Additionally, since our game, like Dungeon Keeper, will have scripted waves of enemies attacking the player’s dungeon, the also should allow our players to alter the wave composition – that is, which types of enemies compose the different groups attacking the player’s dungeon – and delays between the waves. Last, but not least, we must not forget that players do not necessarily have to be (and often are not) programmers, so our game should provide an easy way to install these modifications.

1.3 ???

We have now investigated the main design elements of Dungeon Keeper and how we are going to implement them in our game. The last thing we have to realize is that since we are trying to satisfy the players of the original game, the resulting product of our work should be a full game and not just a prototype. This means that the game should offer full singleplayer experience, with relatively intelligent enemies and the ability to not only win the game, but to also lose. Also, for the game to be competitive with other titles, it should be performant, achieving at least the minimum acceptable framerate, defined as 25-30 frames per second by Shiratuddin, Kitchens and Fletcher [12], on both new and older hardware.

1.4 Thesis Goals

The main goal of this thesis is to design and implement a modifiable 3D dungeon management game using the design elements **(E1)** – **(E6)**.

In addition to the main goal, the game should complete the following list of goals:

- (G1)** The game has to be a full competitive product, not a prototype.
 - (G1.1)** It has to be performant, achieving high framerate even on low end computers.
 - (G1.2)** It has to offer full single player experience, including enemies with scripted behavior and a chance to both win and lose.
 - (G1.3)** It has to contain a variety of entities, spells and buildings even without mods.

- (G2) The game has to be highly modifiable, providing an easy to use modding interface for players.
 - (G2.1) The mod creators must be able to create new entities (including their behavior), spells and buildings and to change characteristics of already predefined entities, spells and buildings including, but not limited to health, damage, model, behavior and abilities of an entity, effect of a spell and which kind of minion does a building spawn.
 - (G2.2) They must also be able to alter the game progression by defining enemies that spawn and delays between them.
 - (G2.3) The game should also support the creation of custom levels.
- (G3) The mods for the game have to be easily installable even by players without any programming knowledge.

2. Problem Analysis

In the introduction section of this thesis, we defined a list of design elements **E1** – **E6** that we are going to implement in our game. We have also presented the notion of modifiability and examined some of the numerous Minecraft mods to see which parts of a game can be modified. In this section, we are going to look at the different tools, libraries and engine design possibilities that could potentially be used to implement our game.

2.1 Modding Tools

In the first chapter, we investigated different possible ways in which we can make our game modifiable and defined a list of aspects we would like to allow our players to change. In this section we examine different tools we can create and provide to our players for mod creation. These tools should satisfy our goals, that is they should allow our players to create and modify entities (**G2.1**), alter the game progression (**G2.2**) and should also produce mods that are easily installable by other players (**G3**).

Modding tools can generally be of two types:

- An API that can be used in a scripting language.
- An editor, good examples being world editors in the Warcraft 3 [13] and Starcraft [14] games.

API

This option would require us to create an interface in which functionality of the engine binds to functions that can be called from a scripting language embedded within the engine. This would allow our players to write scripts that can be loaded at the start of our game or during its runtime and can change anything provided by the interface.

An example of such API can be found in the game Starbound [15], which allows its players to create modifications by using its Lua API to write scripts. An example of a simple Starbound script, which defines a new object in the game that spawns a chicken when the player interacts with it, can be seen in Figure 2.1. Here, the mod creator defined two functions called *init* and *onInteraction*. These two functions are defined by the game and are called by it – *init* is called when the object is placed into the world and *onInteraction* is called whenever the player interacts with the object. The game also provides each mod with several tables that help the mod to interact with the game world – in this case the mod uses the *object* table, which represents each instance of the spawner object, and *world*, which represents the game world and is shared between all objects.

This option allows us to provide a large amount of our engine’s functionality and data wrapped in an easy to use interface, which can lead to the ability to easily modify it and thus satisfying our goal (**G2.1**). This interface can also contain functions that handle the game’s wave system and allows the mod creators to modify wave composition and delays between waves, which would satisfy our


```

function init()
    object.setInteractive(true)
end

function onInteraction()
    world.spawnMonster("chicken",
                        {0, 0}, {level = 10})
end

```

Figure 2.1: A simple script that represents an interactive monster spawner. When the player interacts with this object it spawns a level 10 chicken at the absolute coordinates (0, 0).

goal **(G2.2)**. To satisfy the last of the three goals, **(G3)**, we can design the scripting system of our game in a way that only requires the players to place a downloaded script in a directory and register the script in a config file.

Besides making the game modifiable, this approach can lead to faster development [16] since parts of the game that are not performance critical can be written in an interpreted language. This would avoid long recompilation times that may be needed when we would change a piece of the code base written in a language that needs to be compiled and also allow us to prototype new features and bug fixes without the need to restart the game as many of these interpreted language can execute pieces of code passed to them as strings. Additionally, using a higher level language would make the mod creation process easier for non-programmers [17].

Because of the ease of implementation, satisfaction of our goals, the above mentioned side benefits this option has on the development of the game and the fact that it provides more control for the mod creators – as explained in the following subsection – we decided to choose it for our game.

Editor

A game editor is an external window application used to modify a game. In most cases it's used to edit maps or scenarios for the game. But since the maps in our game are created by the player – by destroying walls and creating buildings – we are more interested in a different aspect of editors and that is changing entities in the game. In Figure 2.2 we can see an example of such editor. It allows its user to select an entity and change its attributes, such as health, placing cost, type, model and the user can even select which predefined abilities and behavior the entity uses. An editor could easily be used to define the composition of enemy waves and the delays between waves, satisfying our goal **(G2.2)** and would allow easy mod installation – as required by our goal **(G3)** – by producing files that can be placed in the game's directory.

While this approach could be easily implemented using configuration files for entities, our goal **(G2.1)** requires the ability to alter the behavior of entities which includes creating entirely new behavior and thus only selecting predefined AI won't suffice. To achieve this, we could require our users to write the behavior using a scripting language, which wouldn't be much different from the previous

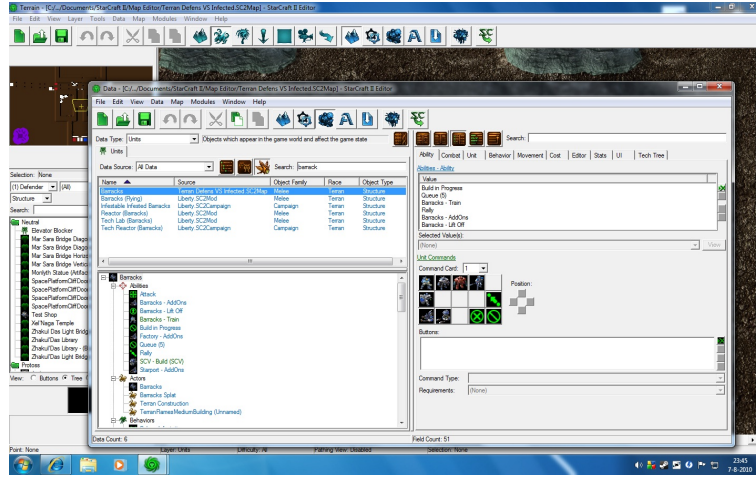


Figure 2.2: Besides map editing, some editors – like the Starcraft editor in this figure – can be used to edit entities.

Source: <http://www.darvo.org>

option. Alternatively, we could create a graphical tool that would allow the user construct the behavior out of blocks representing decisions and actions which would then be translated to source code – again, requiring a scripting language interfaced to the engine. An example of such graphical tool is the blueprint system used by Unreal Engine [18].

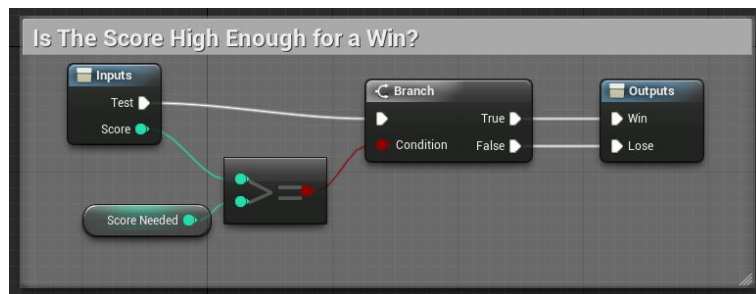


Figure 2.3: A simple blueprint checks if a person passes a test.

Source: <http://www.unrealengine.com>

In Figure 2.3 we can see an example blueprint created in Unreal Engine, it comprises interconnected blocks that represent conditions, loops, actions and other constructs that can be found in a typical programming language. The user uses these blocks to create programs in a more user friendly manner. Unreal Engine then uses these blueprints to generate C++ code that is then used in the game.

Since we want the mods for our game to be easy to create, implementing an editor would be ideal as it would open modding to an even broader audience. But implementing a system that is similar to Unreal Engine’s blueprints would be far out of the scope of this thesis, though it might be a good future addition to the project.

2.2 Programming Language

The first tool we need to decide on is the programming language we are going to write our game in. This choice affects multiple aspects of the final game. These aspects can include, but are not limited to:

- **Performance:** Interpreted languages tend to be slower than compiled languages, but this does not to be always true due to the existence of Just-In-Time – often abbreviated as *JIT* – compilers, which can provide compilation to machine language at program start and runtime optimizations to increase the performance.
- **Speed of development:** Lower level languages often require the implementation of tools that are provided by the standard libraries of higher level languages.
- **Modifiability:** Some programming languages – e.g. interpreted ones – provide means to alter the source code at runtime, while other require recompilation or the use of an embedded language.

The programming language that will be used to create our game needs to have one or more libraries that will allow us to create 3D graphics and be fast enough to offer at least the minimum acceptable framerate while rendering game objects to the screen, updating the state of the game and processing user input. It should also allow our players to modify the game even if they only have the distributed version of the game – meaning it should be able to load code it was not originally compiled with.

Since mod development requires testing of the mod’s functionality in the game, it would be beneficial if the game allowed our mod creators to change the game’s mechanics and data at runtime so that they do not need to restart the game to see what effect does a change in their mod have on the game. This means that the ability to execute a piece of code input as a string or load source files during runtime is a feature our programming language should provide. Lastly, the language should allow us to create a modding API that can be provided to our users as discussed in the previous section.

Aside from these important characteristics, the language should also be easy to use by those of our players that decide to modify the game.

2.2.1 Native Language: C++

C++, the first language we are going to look at and also the language we ended up choosing, was for a long time the industry standard when it comes to video games. One of the main reasons for this was that it is – unlike some of its rivals, e.g. C# or Java – a language that is native, i.e. compiles directly into machine code of a specific processor, which generally results into faster executed code.

This benefit of the language, while still present, got weakened by the rise of JIT compilers as both C# and Java can now compile their intermediate language the first time it’s executed. Since by the time this compilation takes place the compiler knows what operating system, architecture and hardware specification

it compiles for it can provide optimization that a C++ compiler cannot perform, achieving comparable execution speeds.

Even though the performance gap between these languages got reduced, the era of C++ being one of the most used programming languages in game development has resulted into an abundance of game programming related materials like libraries, tutorials and books.

One of our main requirements for a programming language is the ability to load code it was not originally compiled with. C++ allows this with the use of dynamically loaded libraries, but this approach is not easy to use by our mod creators as they would be required to directly interface their mods with the C++ code of the game's engine. An alternative to this approach is to use more user friendly language embedded into C++ – e.g. Lua – and handle the interface between C++ and this language ourselves. This option also allows the execution of a code input to the game at runtime, which satisfies another of our requirements.

The reason we decided to choose C++ as the language our game is going to be written in is mainly a combination of the abundance of various game development related resources aimed at C++ – be it books, tutorials or even answered questions that can be found on internet – and the author's knowledge of the language.

2.2.2 Managed Languages: Java and C#

Managed languages, unlike native ones such as C++, are compiled to an intermediate language which can then either be interpreted by a virtual machine or JIT compiled into machine code of the target architecture. The use of a JIT compiler allows execution speeds that are comparable to those of C++.

Where they beat C++ is in their approachability, as they abstract memory management and other lower level aspects of programming from the programmer. As such, use of these languages would lead to an easier mod making process for our players, but as we have already settled in the previous section, that can be done in C++ using an embedded language with easier to understand syntax and semantics.

Both of the managed languages that were taken into consideration – Java and C# – provide an easy way to execute code input at runtime using either the Java Compiler API [19] or the Roslyn compiler service [20] available in C#. Alongside this feature both languages offer the ability to embed another language through the use of libraries such as LuaJ [21] or NLua [22].

The difference of these two languages lies in their environment. The Java Virtual Machine – often abbreviated as JVM – provides the ability to compile the code once and then run the resulting executable file anywhere, which can be beneficial for an ordinary desktop application. When it comes to games, this advantage loses part of its strength due to the fact that the majority of the players use a Windows operating system – as can be seen in the Steam hardware and software survey [23]. According to the survey, over 95% of the players that use the Steam platform play their video games on a Windows system – ranging from Windows XP to Windows 10. In this case, the use of a virtual machine – be it JVM or .NET's Common Language Runtime – brings little to no advantage over a native language such as C++ in terms of portability. On the other hand, Java

gains a disadvantage compared to C# as it requires the player to have the JVM installed, which is not installed on any of these operating systems by default. This means that our game would require the installation of a third party software – though the JVM can be bundled with the distributed game, it would still ask our players to install updates. The necessity of having the .NET platform installed is not a problem as it is developed by Microsoft, which is also the developer of the Windows operating systems, and as such can be installed through Windows and automatically kept up to date by the Windows Update service.

Because of this problem, the Java programming language was not chosen for the implementation of our game. C#, on the other hand, is an easier to use language than C++ and offers the ability to be modded in itself. Being able to have our game to be modded in C# would be beneficial seeing as the Unity3D game engine [24] uses it for scripting and thus many game developers and modders are already capable of using it. Considering these characteristics of the language, we find it to be equal – if not superior – to C++ in terms of game development capability. The reason for not choosing C# as the language to write our game in was the fact that the author has more experience with C++.

2.3 Scripting Language

Now that we have chosen C++ as the programming language we are going to implement the engine of our game with, we need to choose which language we are provide our modding interface in. Such a language should be easily embeddable within C++, easy to use and well known in the modding community so that people with modding experience can easily create mods for our game.

2.3.1 Lua

Lua is a programming language that was designed to be embedded into other languages like C or C++ and as such provides a simple to use API written in ANSI C allowing easy function binding and data sharing between C/C++ and Lua. These characteristics, along with others such as small memory footprint, easy to understand syntax and high configurability using provided meta mechanisms, caused Lua to become the most favorite language used for game scripting [25].

Due to the high amount of games using Lua for scripting – e.g. the Wikipedia category called "Lua scripted video games" contains 157 entries [26] – there is already a large amount of mod creators that know how to use the language to create mods for games and as such the use of Lua in our game would make our modding tools more familiar to players that already have experience in modding.

The ability to easily embedd Lua to our engine written in C++ along with the familiarity the modding community already has with the language were the main reasons for choosing Lua as the scripting language for our game.

2.3.2 Python

While Python is similar to Lua with its easy to understand syntax, its ability to be embedded to C++ is bit worse in comparison. The various C++/Python interface APIs are mostly designed to allow the extension of Python using C++ and as

such require more work to embedd Python in C++ – e.g. unlike Lua, which uses a special stack to communicate with C++, the CPython API [27] requires manual reference decrementing and incrementing for heap allocated Python objects used in C++.

Where Python generally beats Lua is the abundance of libraries it has available, ranging from scientific libraries to image manipulation libraries. But since our scripting language will be mainly be used as an interface to the functionality of our engine, these libraries offer little to no advantage over Lua’s minimalistic standard library.

The main downside of using Python as our scripting language is in the fact that Lua is used more often as a scripting language in games – the Wikipedia category called ”Python scripted video games” contains 17 entries [28], which is much lower than Lua’s 157 entries. This means that the modding community will probably not be used to writing mods in Python as much as they are in Lua. This downside, along with the significant whitespace Python uses – which might be a bit confusing to a non-programmer that would want to mod our game – were the main reasons for choosing Lua over Python.

2.3.3 AngelScript

AngelScript [29], similarly to Lua, is a programming language designed to be embedded into other languages for scripting. The main advantage it has over Lua is that it is even easier to embedd within C++ because of its C++-like design, requiring only a simple registration of C++ functions in order to be able to call them.

This advantage is also the main downside of the language, as its C++-like syntax is not as easy to understand as Lua’s. This means that while AngelScript would be easier to embedd into the engine, the modding API wouldn’t be as begginer friendly as if it were interfaced to Lua. Because of this downside and a smaller amount of games that use – according to the official website [30], only 35 games use AngelScript for scripting – we have decided to choose Lua over AngelScript.

2.4 Entity Representation

In this section, we are going to investigate different approaches for entity representation in our engine, that is, how is each entity – i.e. anything that is part of the game world, such as a minion, a wall, a trigger, a task or an event – will be structurally represented in our engine. This includes the entity’s data, logic and relationships between different entities.

Since our goal (**G2.1**) requires easy modification of entities, our requirements for the entity representation are:

- **Extensibility:** It should allow easy addition of new entity types so that mods can define new entities for their mods. It should, if possible, also allow this extensibility at runtime, which would provide means for easy runtime testing and prototyping.

- **Modifiability:** It should allow easy modification of predefined entity types so that mods can change entities that are already present in the unmodded game.
- **Performance:** Since the entity updating will, along with rendering, take the majority of execution time, the representation should allow fast entity updates.
- **Ease of Lua binding:** It should be easily representable in Lua even if the entities are defined in the C++ engine.

After taking these requirements into account, we decided to choose the Entity Component System representation – often abbreviated as *ECS* – over the alternatives – inheritance based and Entity Component representations.

Ask PJ: The term representation – does it sound OK? It basically means how an entity is structured/represented within the engine and I wasn't able to come up with a more suitable term.

2.4.1 Entity Component System

Entity Component System is a structural design pattern that endulges the *composition over inheritance* principle. It comprises three main elements: **Entity**, **Component** and **System**.

- Entity is an identifier of anything that is present in the game world. It can be as simple as a numeric identifier or a more complex object, such as a component container.
- Component is a piece of logically related data, it generally represents a single characteristic of an entity, such as its health, position, collision box, movement or behavior.
- System updates a single component or a set of components of all entities that have these components.

In Figure 2.4, we can see an example of a system that – on a set period – regenerates the health of all entities that have a health component. The *health_system* iterates over all *health_components*, which contains all data related to health and regeneration. Updating the game state in ECS is then done by updating all systems.

This representation satisfies all of our three requirements. Since entities are nothing but a set of components, we can specify which types of components constitute an entity in a simple script and we can even create completely new types of entities during runtime by creating a new identifier and assigning components to it.

Similarly, we can add new components and remove existing components of an entity, which allows modification of already existing entities. As an example, we can add a movement component to a stationary entity to make it able to move. This, like the definition of new entities, can be easily done at runtime.

An interesting characteristic of the ECS is its satisfiability of our last goal – performance.

```

entity = {
    health_component = {
        health = 50,
        max     = 100,
        regen   = 2
    }
}

health_system = {
    components = { entity.health_component },

    function update()
        for comp in components do
            if comp.health < comp.max then
                regenerate(comp)
            end
        end
    end,

    function regenerate(comp)
        regenerated = comp.health + comp.regen
        comp.health = min(comp.max, regenerated)
    end
}

```

Figure 2.4: A simple health system that regenerates the health of every entity that has a health component.

- define the ECS design pattern
- mention how well it supports run time entity creation and modification
- mention ease of development this model creates
- mention ease of entity access (through ID)
- talk about the difference between Component and ECS patterns
- ?mention cache friendliness? (pro: well, it exists, con: not used that much in this game)

2.4.2 Inheritance

- explain what is meant by the title (classic OOP design)
- this kind of engine would also have to be planned a lot (to avoid inheritance hierarchy hell)
- ?say that it's not as performant as the other two?

2.4.3 Entity Component

- define the Component design pattern (with references to the gamedesgin-patterns.smth book)
- mention that this is very similar to the component based implementation both Unity and UE4 use
- mention its relationship with both ECS and the inheritance based design

Bibliography

- [1] Orcs must die! <http://en.ond.gameforge.com/>. [Online; accessed 2016-05-15].
- [2] Dungeon Defenders. <https://dungeondefenders.com/1/>. [Online; accessed 2016-05-15].
- [3] Tuur Ghys. Technology Trees: Freedom and Determinism in Historical Strategy Games. http://gamestudies.org/1201/articles/tuur_ghys. [Online; accessed 2016-05-17].
- [4] Minecraft. <http://www.minecraft.net>. [Online; accessed 2016-04-23].
- [5] Curse Minecraft Mod Repository. <http://mods.curse.com/mc-mods/minecraft>. [Online; accessed 2016-06-14].
- [6] PlanetMinecraft Minecraft Mod Repository. <http://www.planetminecraft.com/resources/mods>. [Online; accessed 2016-06-14].
- [7] Industrial Craft 2. <http://www.industrial-craft.net/>. [Online; accessed 2016-05-17].
- [8] ComputerCraft. <http://www.computercraft.info>. [Online; accessed 2016-05-17].
- [9] Lua. <http://www.lua.org>. [Online; accessed 2016-05-09].
- [10] PCGamer. Future of Minecraft. <http://www.pcgamer.com/the-future-of-minecraft/>, 2012. [Online; accessed 2016-04-23].
- [11] Team Fortress 2. <http://www.teamfortress.com>. [Online; accessed 2016-04-23].
- [12] M. F. Shiratuddin, K. Kitchens, and D. Fletcher. *Virtual Architecture: Modeling and Creation of Real-Time 3D Interactive Worlds*. Lulu Press, 2008.
- [13] Warcraft 3. <http://us.blizzard.com/en-us/games/war3/>. [Online; accessed 2016-05-09].
- [14] Starcraft. <http://us.blizzard.com/en-us/games/sc/>. [Online; accessed 2016-05-09].
- [15] Starbound. <http://www.playstarbound.com>. [Online; accessed 2016-05-09].
- [16] J. Gregory. *Game Engine Architecture*. 1st Edition. A K Peters/CRC Press, Boca Raton, FL, 2009.
- [17] Garage Games. Why Use Scripting, Torque Engine documentation. <http://docs.garagegames.com/tgea/official/content/documentation/Scripting%20Reference/Introduction/Why%20Use%20Scripting.html>. [Online; accessed 2016-05-10].

- [18] UnrealEngine 4. <https://www.unrealengine.com>. [Online; accessed 2016-06-28].
- [19] Java Compiler API Documentation. <http://docs.oracle.com/javase/8/docs/api/javax/tools/JavaCompiler.html>. [Online; accessed 2016-06-28].
- [20] Roslyn Repository. <https://github.com/dotnet/roslyn>. [Online; accessed 2016-06-28].
- [21] LuaJ Java Library. <http://www.luaj.org/lua.html>. [Online; accessed 2016-06-28].
- [22] Nlua .Net Library. <http://nlua.org/>. [Online; accessed 2016-06-28].
- [23] Steam Hardware And Software Survey. <http://store.steampowered.com/hwsurvey?platform=combined>. [Online; accessed 2016-06-27].
- [24] Unity3D Game Engine. <https://unity3d.com/>. [Online; accessed 2016-06-28].
- [25] Mark DeLoura. The Engine Survey. <http://www.satori.org/2009/03/the-engine-survey-general-results/>. [Online; accessed 2016-07-02].
- [26] Wikipedia Category: Lua scripted video games. https://en.wikipedia.org/wiki/Category%3aLua-scripted_video_games. [Online; accessed 2016-07-03].
- [27] CPython C API. <https://docs.python.org/2/c-api>. [Online; accessed 2016-07-03].
- [28] Wikipedia Category: Python scripted video games. https://en.wikipedia.org/wiki/Category:Python-scripted_video_games. [Online; accessed 2016-07-03].
- [29] AngelScript. <http://www.angelcode.com/angelscript/>. [Online; accessed 2016-07-03].
- [30] Games scripted in AngelScript. <http://www.angelcode.com/angelscript/users.html>. [Online; accessed 2016-07-03].

Attachments