


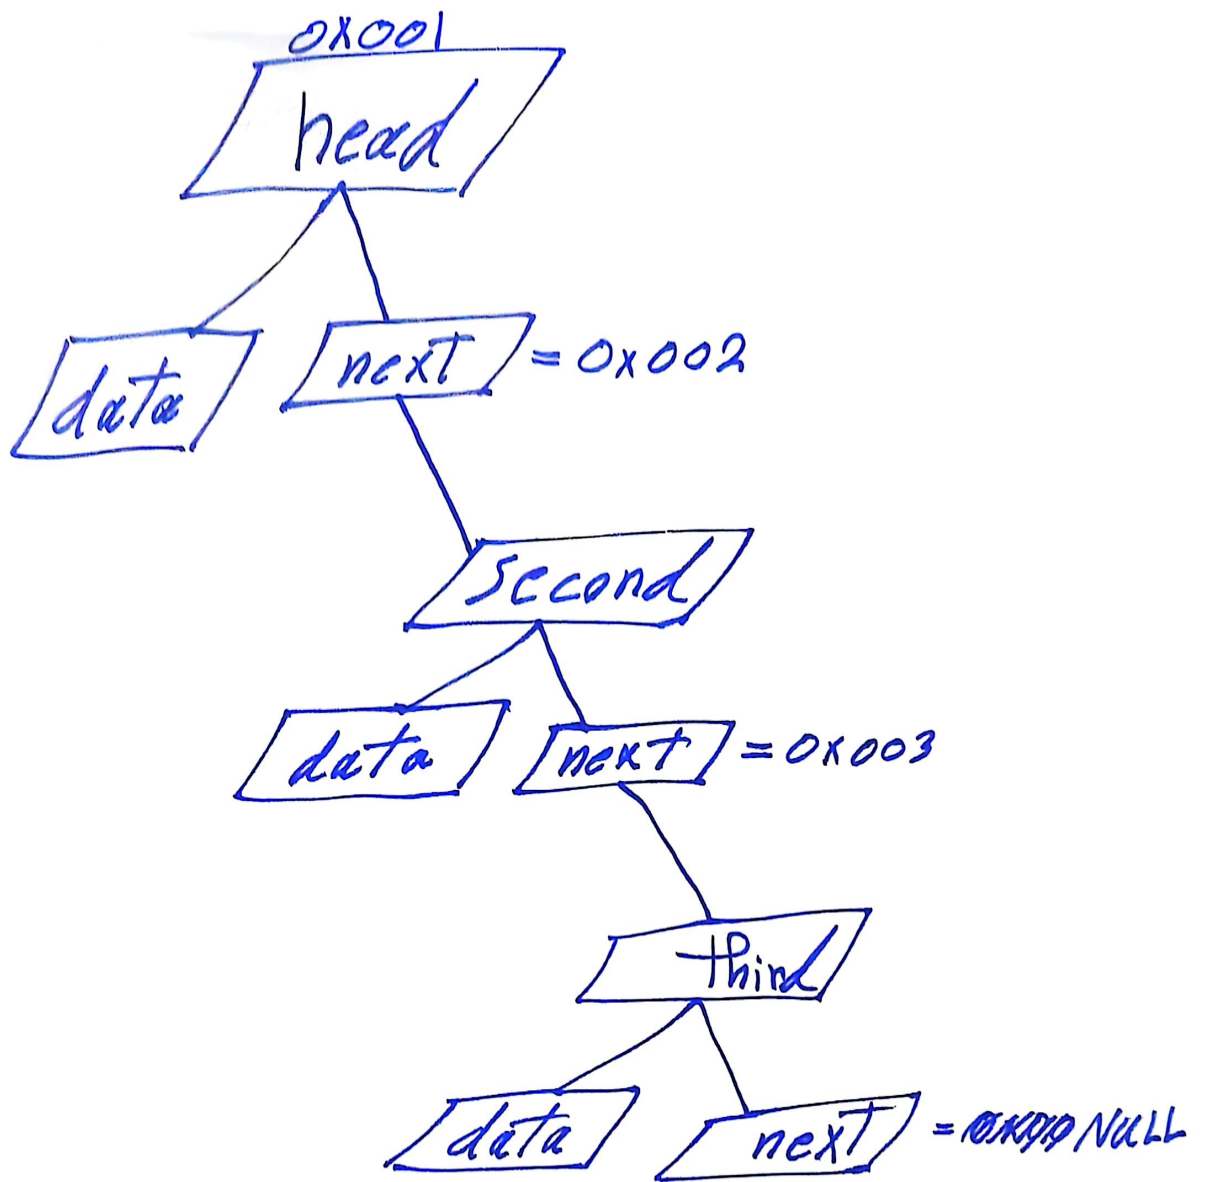

Stack	Heap
$head = 0x001$	0x001 data 0x002
$second = 0x002$	0x002 data 0x003
$third = 0x003$	0x003 data NULL

`insert-at-end(head, s);`

to insert a new node to the list I should go to the last node of the list the
allocate a new space in the heap to the new node and put the address of the new node in `endNode -> next = malloc(...);`.

- I will use while loop to move into the list and after I reach the last node I can injection the new node.

A stylized handwritten signature in blue ink, featuring a large loop and a horizontal line at the bottom.