


int Node *head = NULL;

> Task:

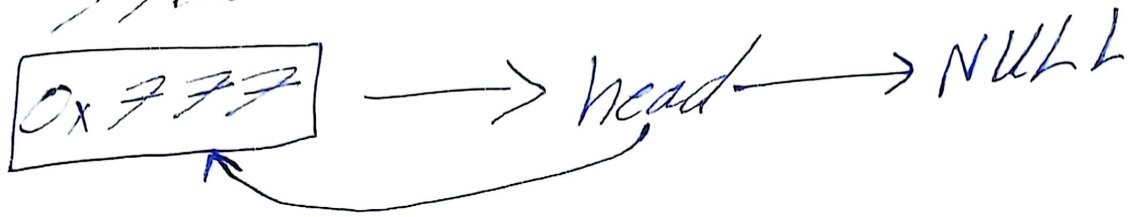

&head = 0x7777

head = NULL

insert_at_end(&head, 10);

↳ 0x7777

↳ head Ref = 0x7777
[0x8888]

Address	Value
0x8888	0x7777

*head Ref == NULL

head Ref == (head address) 0x7777