

THREAT REPORT: UAT-8616

Summary

The source attributes this activity to UAT-8616, a threat actor exploiting Cisco Catalyst SD-WAN vulnerabilities, particularly CVE-2026-20128, to target unknown countries and sectors. The actor utilizes various malware families, including XenShell, Godzilla, and Behinder, to gain access to systems. Priority should be given to patching the exploited vulnerability and monitoring for suspicious account activity. The threat actor's tactics pose a critical operational risk, emphasizing the need for immediate defensive actions.

Threat Overview

UAT-8616, the observed threat actor, is exploiting the CVE-2026-20128 vulnerability in Cisco Catalyst SD-WAN systems, leveraging malware families such as XenShell, Godzilla, Behinder, Sliver, AdaptixC2, XMRig, Nimplant, KScan, and gsocket. The victimology of this campaign remains unclear due to insufficient data on targeted countries and sectors.

Attack Chain and Priority Control

The attack chain involves a series of techniques, including OS credential dumping, exploiting public-facing applications, and using web shells, ultimately leading to account manipulation. The priority technique identified is T1098 Account Manipulation, which serves as a critical chokepoint in the attack chain. The priority action is to: "Patch CVE-2026-20128 on all affected systems as the top priority, then: Alert on privilege/group changes and credential additions to accounts (Event ID 4738/4670); review conditional-access changes."

Infrastructure and Corroboration

Although specific hosting providers or ASNs are not observed, third-party corroboration from abuse.ch confirms the presence of the CoinMiner malware family. However, according to AbuseIPDB, there are no indicators with a confidence level of 80% or higher, and the highest confidence seen is 0%, indicating a lack of additional corroborating evidence from this source.

Technical Appendix


Indicators of compromise for SOC ingestion (defanged).

Type	Indicator	Enrichment
	1a820b09-95ba-44eb-b350-417e8241b725-00-1lgwuuen9b77p[.]worf[.]replit[.]dev	-

Type	Indicator	Enrichment
Domain		
Domain	a820b09-95ba-44eb-b350-417e8241b725-00-1lgwuuen9b77p[.]worf[.]replit[.]dev	-
URL	hxxp://83[.]229[.]126[.]195:8081/config[.]json	-
URL	hxxps://1a820b09-95ba-44eb-b350-417e8241b725-00-1lgwuuen9b77p[.]worf[.]replit[.]dev/download	-
Hash	d94f75a70b5cabaf786ac57177ed841732e62bdcc9a29e06e5b41d9be567bcfa	-
Hash	d75cb9920d1d3d280518ddccfe4789d2	-
Hash	18821dbb53892d6faa14b1f063517a0302057290	-
Hash	cf127d66124c390ca0f0b42c6385c3c8	CoinMiner
Hash	01e3dce00ea45829bd9f6a583004976ac63973a0	CoinMiner
Hash	96fc528ca5e7d1c2b3add5e31b8797cb126f704976c8fbaecdbf0aa4309ad46	CoinMiner
Hash	e22d1b625ee309b60caf0252c5df7656	-
Hash	fece5b954e69b2c6a8d0a1029631a0d7	-
Hash	d0a851f0b871df60c73d2c7d3f55b031c45e4c2e	-
Hash	02654acfb21f83485393ba8b14bd8862b919b9ec966fc6768f6aac1338a45ee8	-
Hash	0c87871642f84e09e8d3fb23ec36bf55601323e31151a7017a85dbec929cf15d	-
Hash	0ed72d52347bfe4a78aff8a6982a64050c8fc86d8957a20eeb3e0f3f5342ed0	-
Hash	17302d903baf182f94dc3be40ab1e0874dd0eb2ec5255bf9131fd53591efe925	-
Hash	18d77c9c5bbb5b9d5bdfd366fdcf26bad9e64c63ca865fad711bcce8e3d5a80	-
Hash	5bc5998161056b7c8f70c9724d8a63abc7ff8c3843b91c30cffab0899e39b7f8	-
Hash	72f570ce97de3eaaffef33d90b0c337a153fc9690cc34ee207b557d868360060	-
Hash	7aa88a64a527ade7d93c20faf23b54f2ee33ad9b1246cdc2f8ded2ab639affb1	-
Hash	b0f51b098842cd630097b462aab0ec357e2c7824af37cca6d08165265da2c2d3	-
Hash	f6f8e0d790645395188fc521039385b7c4f42fa8b426fd035f489f6cda9b5da1	-

Visual Summary

Kill-Chain Reach — Critical (deepest phase reached)

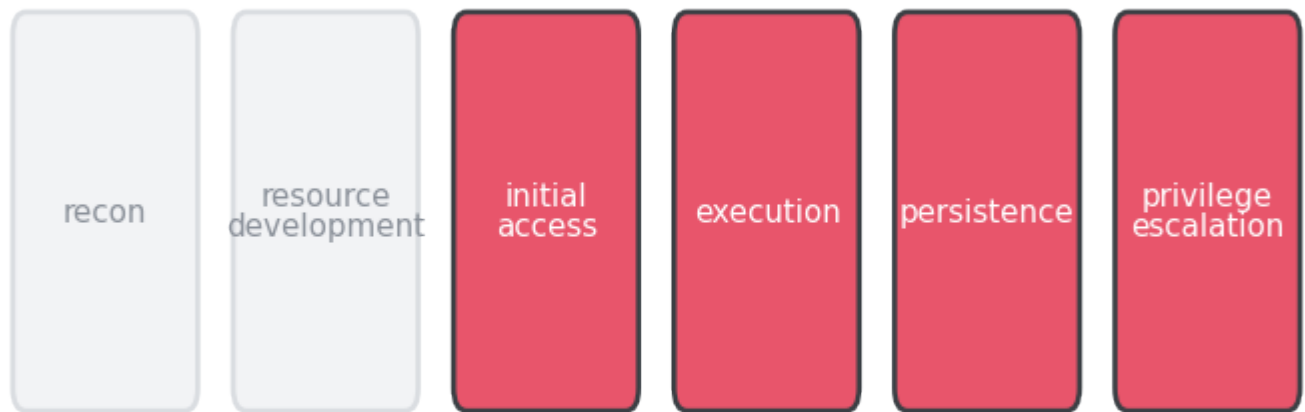

■ deepest reached

Defensive Choke

