

OG-PHL: Input and Output

Jason DeBacker¹ **Richard W. Evans**²

¹University of South Carolina, Department of Economics

²Abundance Institute, Open Research Group, Inc.

January 15, 2026
United Nations, Philippines

Overview

- OG-PHL Inputs
 - Parameters and larger objects
 - Where to find them
- OG-PHL Output
 - Where it is
 - How to access it
 - Different ways to display it
- Ways to run the model

Takeaway

Basic understanding of model parameters, outputs, and how to run the model

OG-PHL Inputs

Two types of inputs

Parameters and arrays: Necessary info for model simulation

- New description of all parameters in OG-Core appendix chapter “[Model parameters](#)”
- New list of uniquely calibrated parameters in [OG-PHL documentation](#)
- Best description in OG-Core [default_parameters.json](#) file
- Other inputs, such as demographics, are created/updated with other files like [parameters.py](#) in OG-Core, and [calibrate.py](#) in OG-PHL

Default parameters and parameters object

- Go through OG-Core `default_parameters.json` and “[Model parameters](#)” chapter
- Instantiate a default OG-Core parameters object in notebook
- Go through OG-PHL `ogphl_default_parameters.json`
- Update the parameters object in notebook to OG-PHL default
- Show how to update and change parameters in scripts


OG-PHL output

Two main output files for each Simulation

- `SS_vars.pkl`
- `TPI_vars.pkl`

Notebook

Go through output and image objects and show automatic functionality

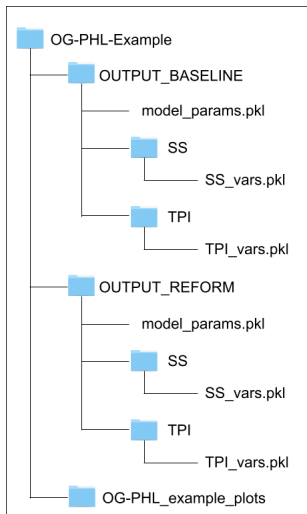

Ways to run OG-PHL

- ❶ (Local) Clone/download all repository files
 - Best for developing and customizing
 - Create `ogphl-dev` conda environment
 - Run either with Python scripts or in Jupyter notebook
- ❷ (Local) `pip install ogphl` from PyPI.org
 - Best if only want parameter changes, and don't need to change underlying model
 - Run either with Python scripts or in Jupyter notebook
- ❸ (Cloud) Run in Google Colab using `pip install ogphl`
(<https://tinyurl.com/ogphl-colab>)

<https://tinyurl.com/ogphl-colab>

