

Homework 9

● Graded

Student

苏慧哲

Total Points

29 / 30 pts

Question 1

Multiple Choices

6 / 6 pts

✓ - 0 pts Correct

- 2 pts Q1 wrong

- 2 pts Q2 wrong

- 2 pts Q3 wrong

- 1 pt Q1 partly correct

- 1 pt Q2 partly correct

- 1 pt Q3 partly correct

Question 2

Topological Sort

8 / 8 pts

2.1 Question 4

5 / 5 pts

✓ + 2 pts Correct vertex selection

✓ + 2 pts Correct in-degree update

✓ + 1 pt Correct topological sorting.

+ 0 pts All wrong

2.2 Question 5

3 / 3 pts

✓ - 0 pts Correct

- 3 pts Wrong

- 1.5 pts half wrong?

Question 3

Dijkstra's Algorithm

7 / 8 pts

3.1 Question 6

5 / 5 pts

✓ - 0 pts Correct

- 1 pt 1 iteration wrong

- 2 pts 2 iterations wrong

- 3 pts 3 iterations wrong

- 4 pts 4 iterations wrong

- 5 pts 5 or more iterations wrong

3.2 Question 7

2 / 3 pts

- 0 pts Correct

- 1 pt Wrong Row 2

- 1 pt Wrong Row 3

✓ - 1 pt Wrong Row 4

- 0.5 pts Minor simplification problem (not tight)

- 3 pts Wrong or Blank

Question 4

Providing Counterexamples

8 / 8 pts

4.1 Question 8

2 / 2 pts

✓ - 0 pts Correct

- 1 pt Partial Credit

- 2 pts Wrong / Missing

4.2 Question 9

3 / 3 pts

✓ - 0 pts Correct

- 3 pts wrong answer

- 1 pt partial wrong pr not enough explaining

4.3 Question 10

3 / 3 pts

✓ - 0 pts Correct

- 1.5 pts Partial Credit

- 3 pts Wrong / Blank

No questions assigned to the following page.

CS101 Algorithms and Data Structures
Fall 2021
Homework 9

Due date: 23:59, December 5, 2021

1. Please write your solutions in English.
2. Submit your solutions to gradescope.com.
3. Set your FULL Name to your Chinese name and your STUDENT ID correctly in Account Settings.
4. If you want to submit a handwritten version, scan it clearly. CamScanner is recommended.
5. When submitting, match your solutions to the according problem numbers correctly.
6. No late submission will be accepted.
7. Violations to any of above may result in zero score.

Question assigned to the following page: [1](#)

1: ($2^1+2^1+2^1$) Multiple Choices

Each question has **one or more** correct answer(s). Please answer the following questions **according to the definition specified in the lecture slides**.

Note: Write down your answers in the table below.

Question 1	Question 2	Question 3
A B C	B C	A B C D

Question 1. Which of the following statements about **topological sort** is/are true?

- (A) Any sub-graph of a DAG has a topological sorting.
- (B) Any directed tree has a topological sorting.
- (C) Implementation of topological sort requires $O(|V|)$ extra space.
- (D) Since we have to scan all vertices to find those with zero in-degree in each iteration, the run time of topological sort is $\Omega(|V|^2)$.

Question 2. Which of the following statements about **Dijkstra's algorithm** is/are true?

- (A) Dijkstra's algorithm can find the shortest path in any DAG.
- (B) If we use Dijkstra's algorithm, whether the graph is directed or undirected does not matter.
- (C) If we implement Dijkstra's algorithm with a binary min-heap, we may change keys of internal nodes in the heap.
- (D) We prefer Dijkstra's algorithm with binary heap implementation to the naive adjacency matrix implementation in a dense graph where $|E| = \Theta(|V|^2)$.

Question 3. Which of the following statements about **Bellman-Ford's algorithm** is/are true?


- (A) Bellman-Ford's algorithm can find the shortest path for negative-weighted directed graphs without negative cycles while Dijkstra's algorithm may fail.
- (B) The run time of Bellman-Ford's algorithm is $O(|V||E|)$, which is more time-consuming than Dijkstra's algorithm with heap implementation.
- (C) Topological sort can be extended to determine whether a graph has a cycle while Bellman-Ford's algorithm can be extended to determine whether a graph has a negative cycle.
- (D) Topological sort can find the critical path in a DAG while Bellman-Ford's algorithm can find the single-source shortest path in a DAG.

Questions assigned to the following page: [2.1](#) and [2.2](#)

2: (5'+3') Topological Sort

Given the following DAG, run topological sort with a queue. Write down the vertex you select and update the in-degree $\text{ind}[i]$ of all vertices in each iteration.

Note: When pushing several vertices into the queue at the same time, push them alphabetically. You are NOT required to show your queue at each step.

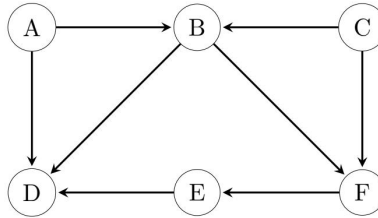

	vertex	$\text{ind}[A]$	$\text{ind}[B]$	$\text{ind}[C]$	$\text{ind}[D]$	$\text{ind}[E]$	$\text{ind}[F]$
initial	/	0	2	0	3	1	2
iteration 1	A	0	1	0	2	1	2
iteration 2	C	0	0	0	2	1	1
iteration 3	B	0	0	0	1	1	0
iteration 4	F	0	0	0	1	0	0
iteration 5	E	0	0	0	0	0	0
iteration 6	D	0	0	0	0	0	0

Question 4. Fill in the table above. What is the topological sorting that you obtain?

A, C, B, F, E, D

Question 5. How many different topological sortings does this graph have? Write them down.

2.


A, C, B, F, E, D

C, A, B, F, E, D

Questions assigned to the following page: [3.1](#) and [3.2](#)

3: (5'+3') Dijkstra's Algorithm

Given the following weighted graph, run Dijkstra's algorithm by considering *A* as the source vertex. Write down the vertex you select and update current distance $\text{dis}[i]$ of all vertices in each iteration.

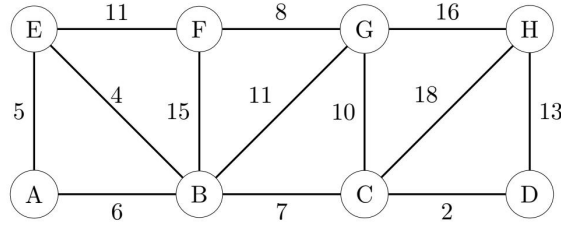

Question 6. Fill in the table below.

	vertex	$\text{dis}[A]$	$\text{dis}[B]$	$\text{dis}[C]$	$\text{dis}[D]$	$\text{dis}[E]$	$\text{dis}[F]$	$\text{dis}[G]$	$\text{dis}[H]$
initial	/	0	∞	∞	∞	∞	∞	∞	∞
iteration 1	A	0	6	∞	∞	5	∞	∞	∞
iteration 2	E	0	6	∞	∞	5	16	∞	∞
iteration 3	B	0	6	13	∞	5	16	17	∞
iteration 4	C	0	6	13	15	5	16	17	31
iteration 5	D	0	6	13	15	5	16	17	28
iteration 6	F	0	6	13	15	5	16	17	28
iteration 7	G	0	6	13	15	5	16	17	28
iteration 8	H	0	6	13	15	5	16	17	28

Question 7. Fill in the table below for **time complexity analysis** of Dijkstra's algorithm with different implementation. Write down your answer as simplified as possible.

Hint: Total Run Time = $\text{pop}() \text{Time} \times |V| + \text{relax}() \text{Time} \times |E|$ for Dijkstra's algorithm with adjacency list implementation, where $\text{pop}()$ is the operation to find the unvisited vertex with least $\text{dis}[i]$ in one iteration and $\text{relax}()$ is the operation to update $\text{dis}[v]$ according to $\text{dis}[u]$ and weight of edge (u, v) . Heap implementation is based on adjacency list implementation.


Implementation	$\text{pop}()$	$\text{relax}()$	total
Adjacency Matrix	$O(V)$	$O(1)$	$O(V ^2)$
Adjacency List	$O(V)$	$O(1)$	$O(V ^2)$
Binary Heap	$O(\log V)$	$O(\log V)$	$O(E \log V)$
Fibonacci Heap	$O(\log(V))$	$O(1)$	$O(V \log V)$

Questions assigned to the following page: [4.1](#) and [4.2](#)

4: (2'+3'+3') Providing Counterexamples


For each of the following statements, provide counterexamples by **drawing a graph** and **briefly explaining it** to illustrate that these three statements are incorrect.

Question 8. *Each DAG with $|V|$ vertices and $|V| - 1$ edges has its unique topological sorting.*




$|V| = 3$, $|E| = 2 = |V| - 1$. The two topological sort is A, B, C and B, A, C

Question 9. *Since we can find the **maximum spanning tree** in a graph by negating all edge weights by multiplying -1 and then running Prim's algorithm, similarly we can find the **longest path** in a positive-weighted graph by negating all weights and running Dijkstra's algorithm from every source node.*



Which converts to




Questions assigned to the following page: [4.3](#) and [4.2](#)

And the dijkstra's algorithm runs as follow

	vertex	dis[A]	dis[B]	dis[C]	dis[D]
initial	/	0	∞	∞	∞
iteration 1	A	0	-8	-11	-6
iteration 2	C	0	-8	-11	-6
iteration 3	B	0	-8	-11	-17
iteration 4	D	0	-8	-11	-17
max distance	/	0	8	11	17
supposed distance	/	0	15	27	17

The max distance from A to C given by dijkstra is 11, but it should be 27 with path (A, B, D, C) .

Question 10. Assume that we implement Dijkstra's algorithm with a binary heap as the priority queue in a positive-weighted graph, then we can do the following operation: when the terminal vertex is pushed into the priority queue, we can stop the algorithm and return the correct shortest path from the source vertex to the terminal vertex, instead of keeping running the algorithm until popping the terminal vertex from the heap.



Suppose the terminal vertex is D . We start from A . In the first iteration, we pushed $(C, 2)$, $(B, 10)$ and $(D, 9)$. Since D has been pushed into the heap, we can stop and get the distance from A to D equals 9. However, the shortest path from A to D should be (A, C, D) with distance 5.