Everlight Chemical

臺灣永光化學工業股份有限公司

EVERLIGHT CHEMICAL INDUSTRIAL CORPORATION

Tel: +886-2-27066006 Fax: +886-2-27081254

E-mail: sales-CCBU@ecic.com.tw

Everlight (Shanghai) Ltd.
上海德樺貿易有限公司
Tel: +86-21-62196954 Fax: +86-21-62191276

Everlight (Suzhou) Advanced Chemicals Ltd.
永光（蘇州）光電材料有限公司
Tel: +86-512-62871980 Fax: +86-512-62871217

Everlight (HongKong) Ltd.
香港永光有限公司
Tel: +852-26191095 Fax: +852-26191031

Ethical (Guangzhou) Ltd.
廣州明廣貿易有限公司
Tel: +86-20-38497030 Fax: +86-20-38497031

Qingdao Office
青島分公司
Tel: +86-532-85016051 Fax: +86-532-85016063

Tianjin Office
天津分公司
Tel: +86-22-23202016 Fax: +86-22-23202015

Everlight USA, Inc.
美國永光公司
Tel: +1-704-5881004 Fax: +1-704-5880051

Everlight Europe B.V. (Netherlands)
荷蘭永光公司
Tel: +31-10-2380099 Fax: +31-10-2380090

Elite Foreign Trading Inc. (Turkey)
土耳其 Elite 公司
Tel: +90-324-2377789 Fax: +90-324-2370246

Everlight Chemicals (Vietnam) Co., Ltd.
越南永光公司
Tel: +84-28-3520-2761 Fax: +84-28-3636-8375

Technical Marketing & Service Division
技術行銷處
Tel: +886-3-4838088 E-mail: ccbu-tms@ecic.com.tw

警語：*本資料所提供的資訊與建議是以我們最大的用心完成，但不能涵括所有可能的狀況。使用相關產品或搭配其他產品時，請先自行測試。本資料並不具保證及法律效用，僅供參考使用。使用者必須自行承擔所有的風險與法律責任。*

Warnings: *The information and recommendations presented here were completed with the utmost care, but can't be extended to cover every possible case. They are intended to serve as non-binding guidelines and must be adapted to the prevailing condition. The product whether used singly or in combination with other substances, should be carried out in lab test prior to bulk production. The user needs to assume all risk and liability no matter whatsoever results are.*

bluesign SYSTEM PARTNER

July 2025

Everzol®

染料於高錳酸鉀刷白應用

Everzol® dyes for Potassium Permanganate Discharge



Everlight Chemical


Everzol 系列可高錳酸鉀刷白染料
提高產品附加價值

- 適用於浸染、冷壓染與連續染色工藝
- 優異的高錳酸鉀洗舊加工及刷白特性
- 色澤鮮豔、色域廣、高牢度
- 優異之染色相容性及均染性

Everzol Dyes for Potassium Permanganate

- Suitable for exhaust / CPB / Continuous dyeing
- Unique wash-down and discharge effects by potassium permanganate
- Brilliant colors and wide gamut and high fastness
- Merits of dyeing compatibility and levelness

Everzol 染料成衣染色建議流程 / Recommended dyeing process for Everzol dyes

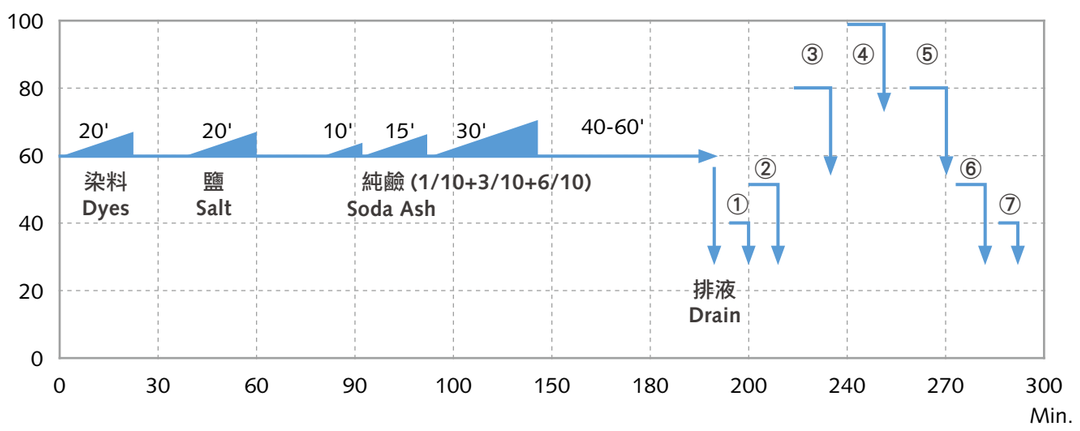

水洗流程 Wash-off：
① 冷水洗 Cold rinse
② 酸中和 Neutralization
③ 熱水洗 Hot rinse
④ 皂洗 Soaping
⑤ 熱水洗 Hot rinse
⑥ 溫水洗 Warm rinse
⑦ 冷水洗 Cold rinse





染色濃度的鹽、鹼使用量及染色時間 / Salt and Alkali requirement & dyeing time

浸染染色浴比 1:10（使用純鹼）/ exhaust dyeing using soda ash only at LR 1:10									
染色濃度 (Depth)	%	<0.5%	0.5-1%	1-2%	2-3%	3-4%	4-5%	5-6%	≧ 6%
鹽 (Salt)	g/l	20	30	40	50	60	70	80	80
純鹼 (Soda ash)	g/l	10	15	20	20	20	20	20	20
染色時間 (Time)	min.	30	45	60	60	60	60	60	60

浸染染色浴比 1:10（使用混合鹼）/ exhaust dyeing using soda ash & caustic soda at LR 1:10									
染色濃度 (Depth)	%	<0.5%	0.5-1%	1-2%	2-3%	3-4%	4-5%	5-6%	≧ 6%
鹽 (Salt)	g/l	20	30	40	50	60	70	80	80
純鹼 (Soda ash)+ 液鹼 (Caustic soda)	g/l + ml/l	5+0.5	5+0.5	5+1	5+1	5+1	5+1	5+2	5+2
染色時間 (Time)	min.	30	45	60	60	60	60	60	60

高錳酸鉀刷白建議流程 / Recommended of Potassium Permanganate Discharge - $KMnO_4$

①染色 Dyeing	②高錳酸鉀刷白 Monkey Spray Brush	③中和 Neutralization	④螯合洗淨 Sequester Rinsing	⑤後整理 After treatment
Everzol Dyes	$KMnO_4$ 20-40 g/l	$Na_2S_2O_5$ 4 g/l	H_2O_2 2 g/l	Hydro extraction →
Salt / Alkali	H_3PO_4 15-25 g/l	Oxalic acid 2 g/l	Soda Ash 2 g/l	Drying & Softening
60℃ x 40-60'	Room Temp. x 10'	Room Temp. x 20'	Chelating agent 0.5 g/l	

適合高錳酸鉀（馬騮）刷白之 Everzol 染料

Recommended Everzol dyes for $KMnO_4$ Discharge by Monkey Spray Brush

Golden Yellow RNL		Yellow ED-S		Orange ED-N	
Red BB		Red LF-B		Red LF-2B	
Blue FC		Blue LX		Blue BRF 150%	
Brilliant Blue R s/p		Blue ED-G		Turq. Blue G 133%	
Blue ED		Blue L-ED		Dark Blue LF	
Navy LX		Navy Blue GG		Navy Blue FBN	
Navy Blue RGB H/C		Olive CS		Grey CS	
Black B		Black ED-G		Black ED-R	