


[B10905009 陳荷昀](#), **B10918121 楊順傑**, [B11118003 劉](#)

[樟](#), [B11118005 楊以琳](#), [H10818003 張仕衡](#)

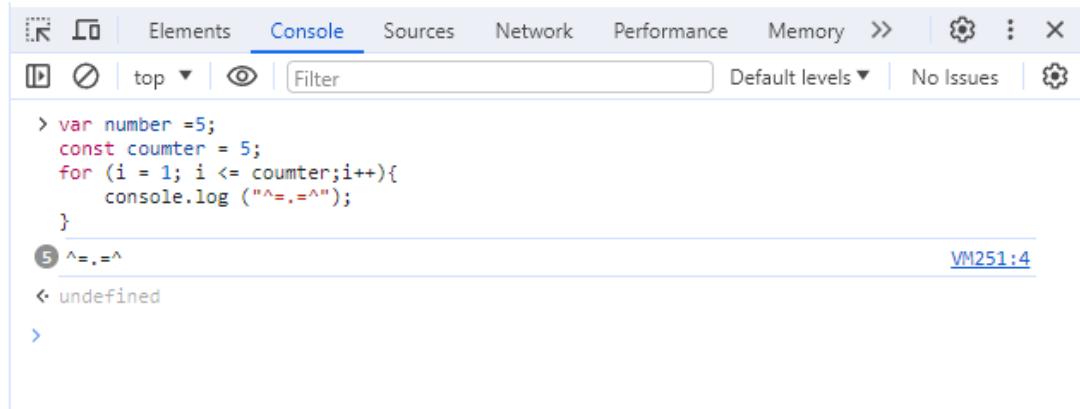

The image shows a screenshot of a web browser's developer console. The console is open to the 'Console' tab, which is highlighted in blue. The console displays a JavaScript code snippet that defines a variable 'number' with the value 5, creates a constant 'counter' with the value 5, and then enters a 'for' loop that iterates from 1 to 5. Inside the loop, the code calls 'console.log' to print the string '^=.=^'. The output of the code is shown below the code snippet: a message with a circular icon containing the number 5, followed by the string '^=.=^'. To the right of the output, the text 'VM251:4' is visible. Below the output, the text 'undefined' is displayed, and a blue arrow points to the right.

```
> var number =5;
const counter = 5;
for (i = 1; i <= counter;i++){
  console.log ("^=.=^");
}
```

5 ^=.=^ VM251:4

← undefined

>