

UEFI & EDK II Training

How to Write a UEFI Driver

tianocore.org

LESSON OBJECTIVE

- ★ What is the UEFI Driver Model
- ★ Details on Driver Binding Protocol
- ★ Example of UEFI Driver

UEFI DRIVER MODEL

Defining a UEFI Driver

UEFI Loadable Image


May produce/consume protocols

Supports complex bus hierarchies


Driver Binding Protocol matches drivers to devices,
adds version management

Supports specific hardware, can be unloaded or
override an existing driver

UEFI Drivers - Location

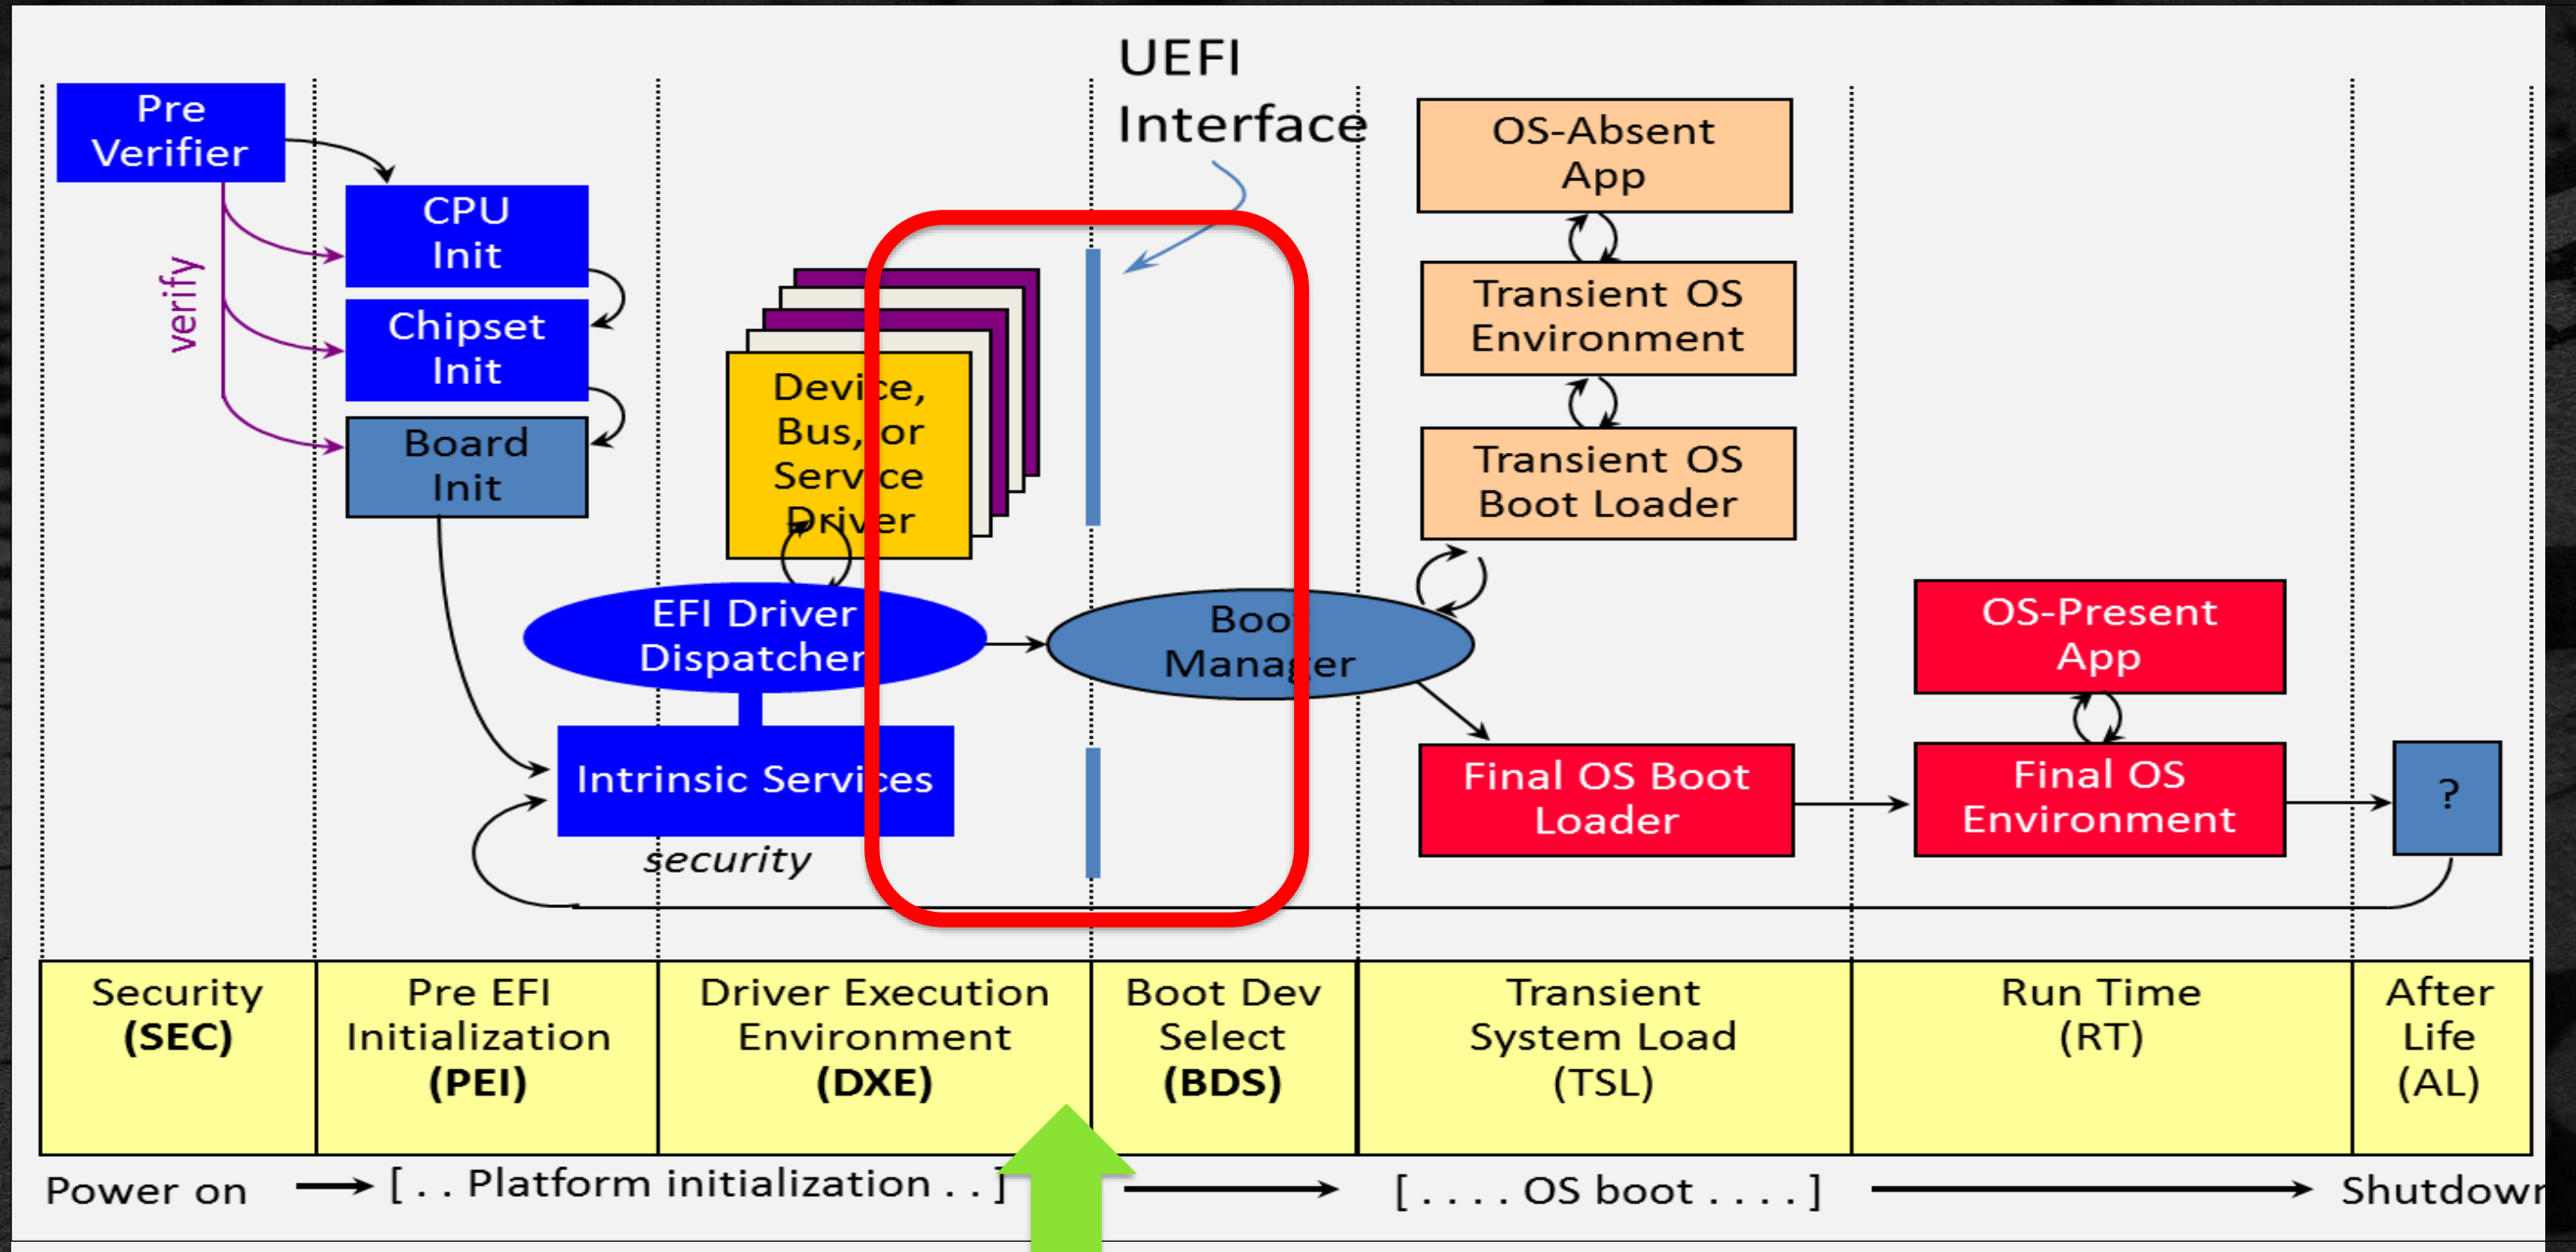

UEFI Drivers - Location

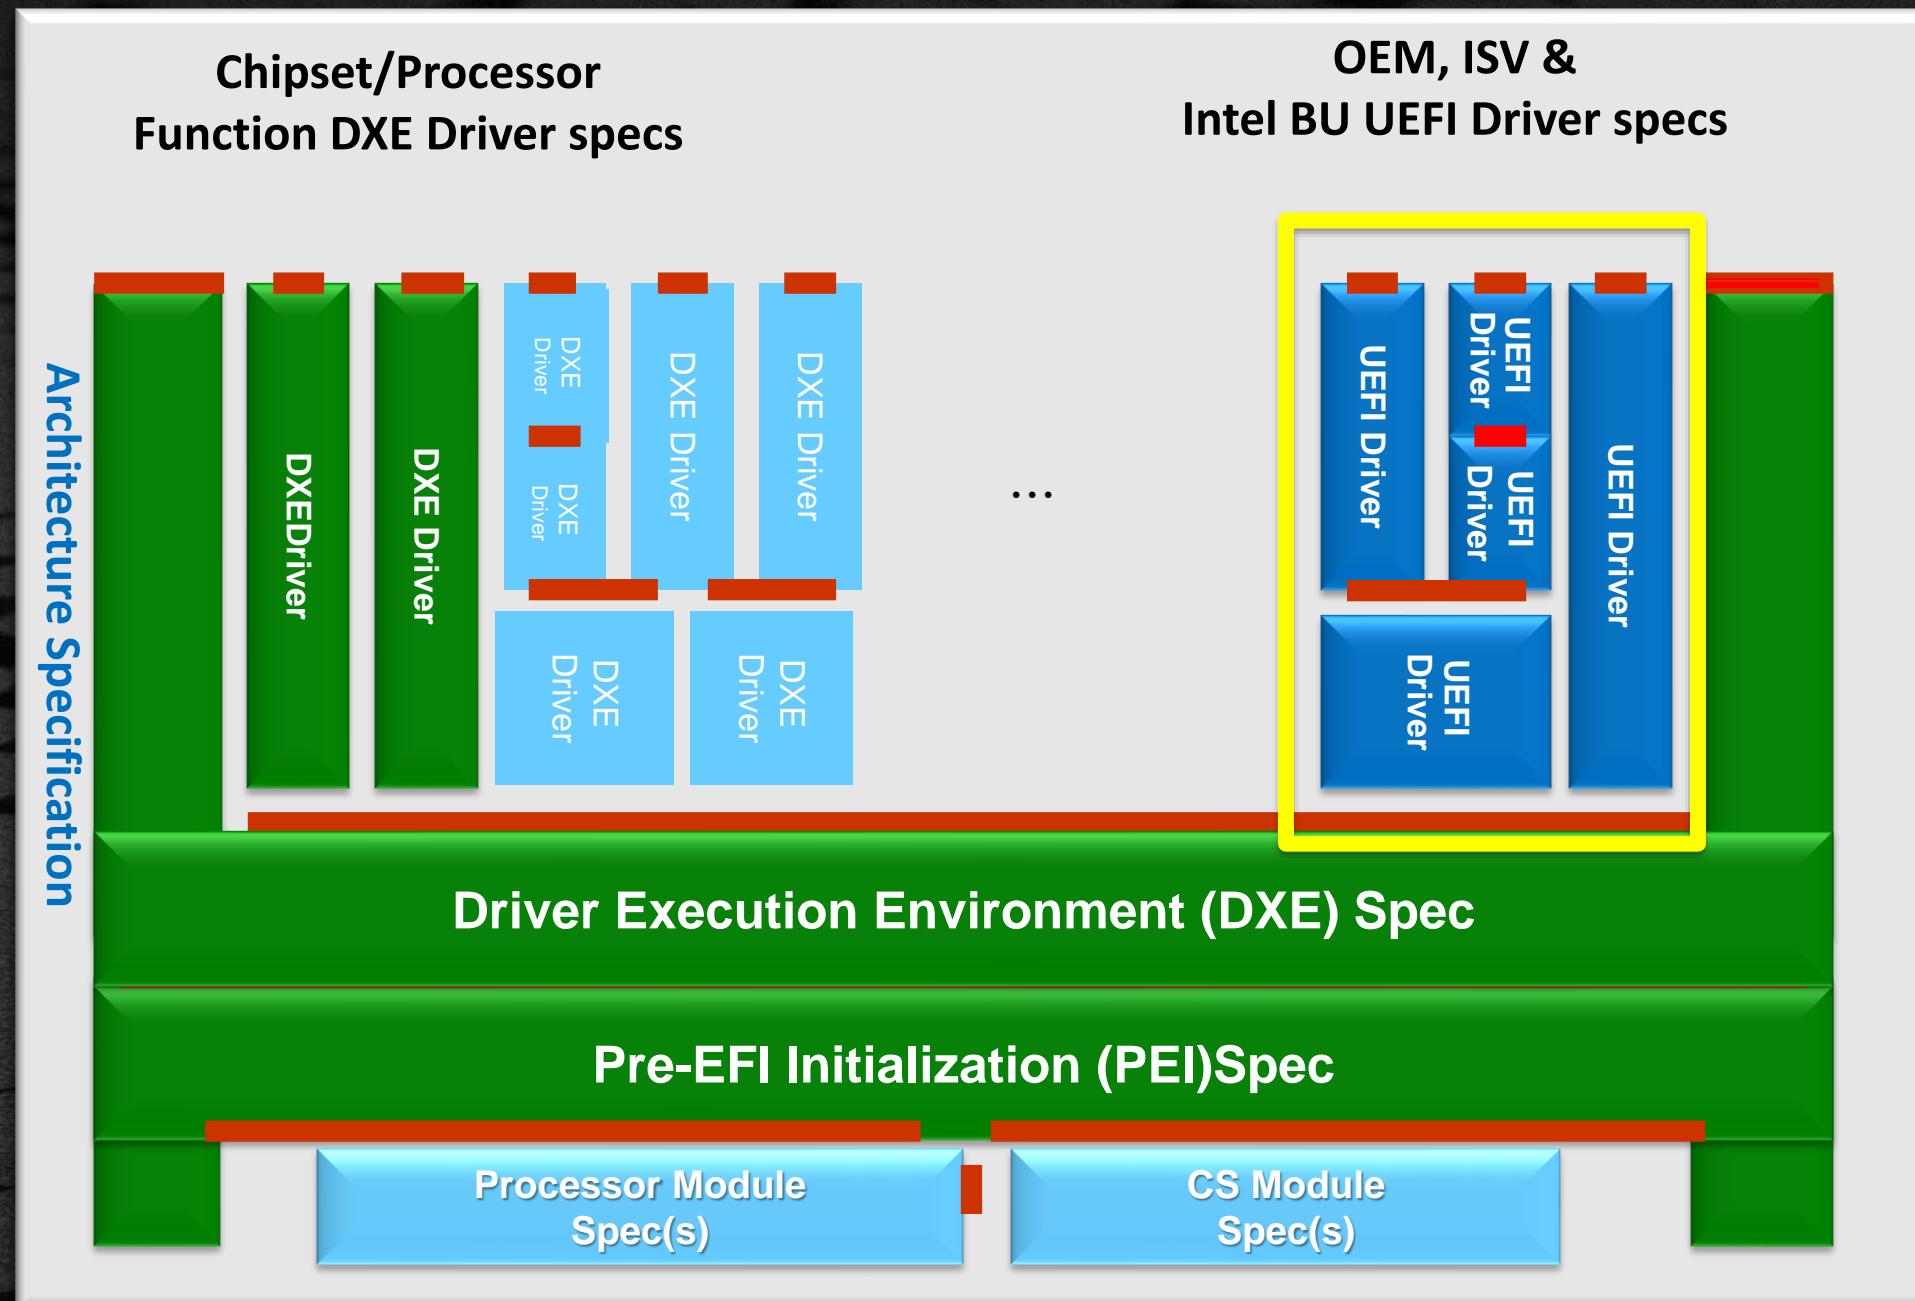

UEFI Drivers Vs. Applications

A blue rectangular box with a yellow border, containing the text "UEFI Loader".

UEFI Loader

UEFI Drivers Vs. Applications



UEFI Drivers Vs. Applications




UEFI Drivers Vs. Applications



UEFI Drivers Vs. Applications



UEFI Drivers Vs. Applications

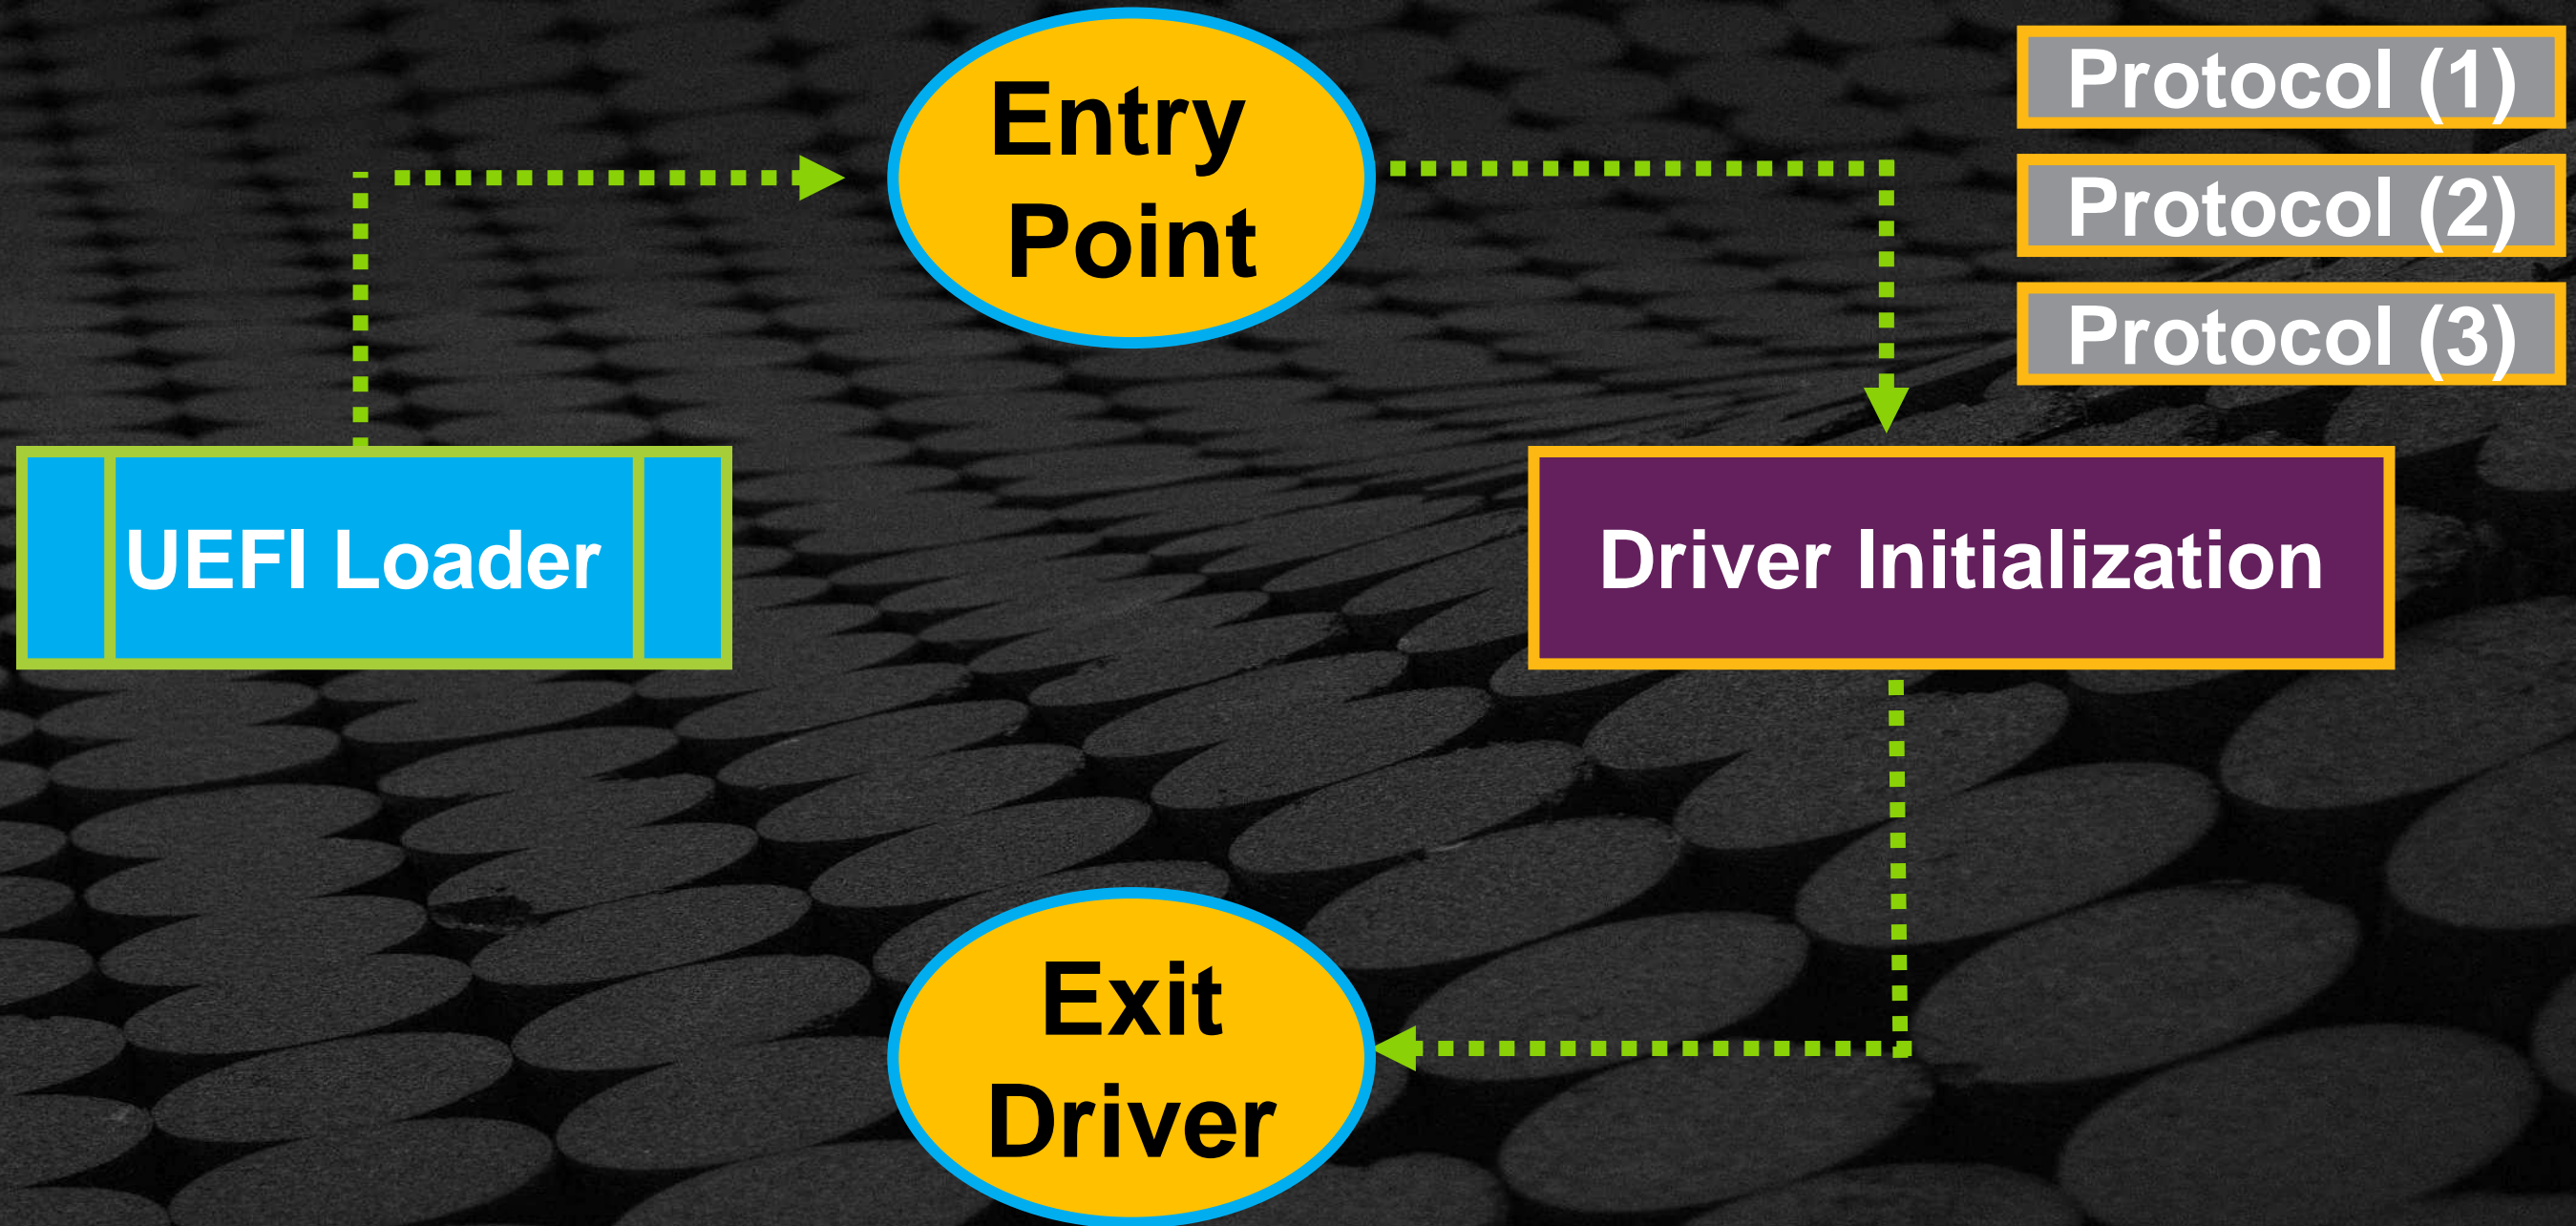

UEFI Drivers Vs. Applications

Protocol (1)

Protocol (2)

Protocol (3)

UEFI Loader

Driver Initialization

Exit
Driver

UEFI Drivers Vs. Applications

Protocol (1)

Protocol (2)

Protocol (3)

UEFI Loader

Driver Initialization

UEFI Drivers Vs. Applications

UEFI Loader

Protocol (1)


Protocol (2)

Protocol (3)

Driver Initialization

Drivers Produce Protocols

**Handle
Database**

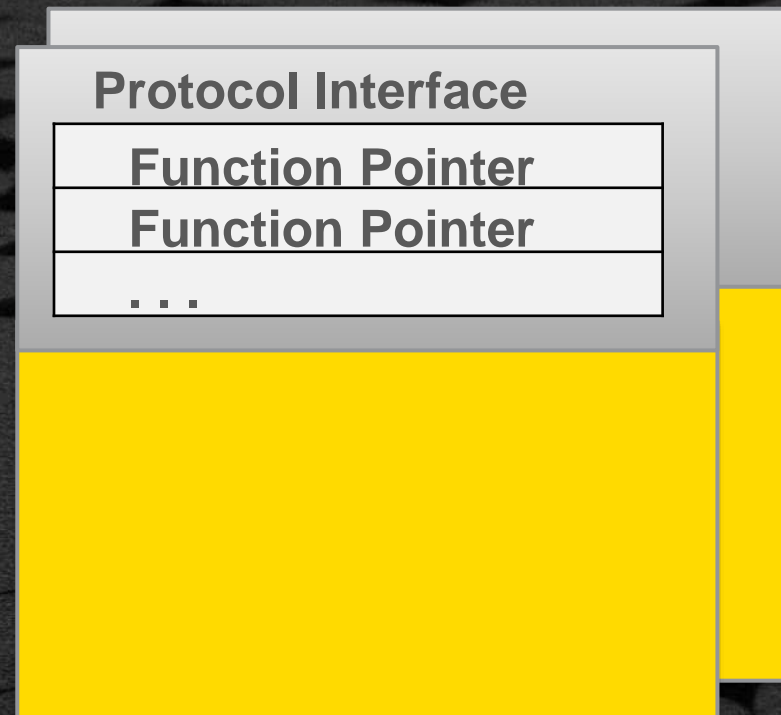


Drivers Produce Protocols



Construction of a protocol

**Handle
Database**


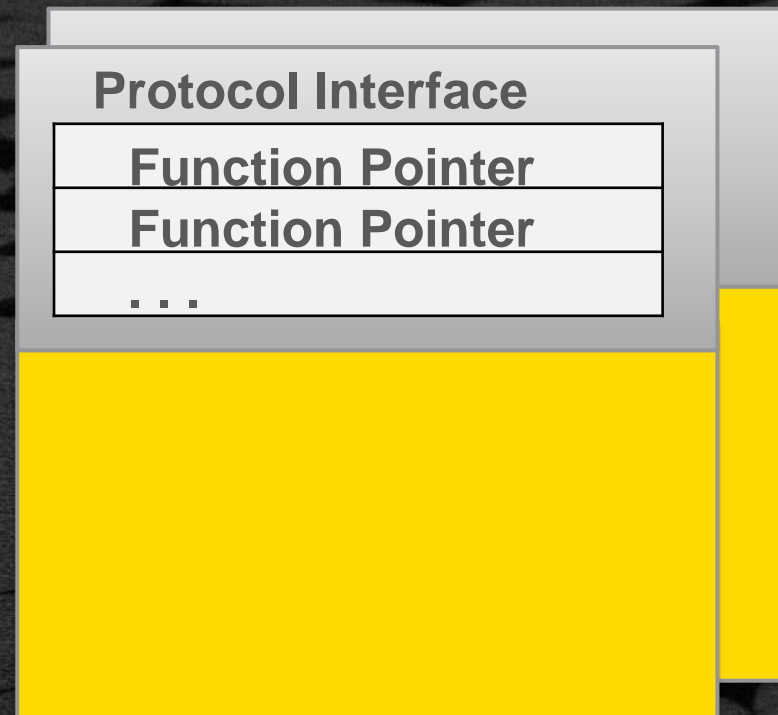


Drivers Produce Protocols



Construction of a protocol

**Handle
Database**

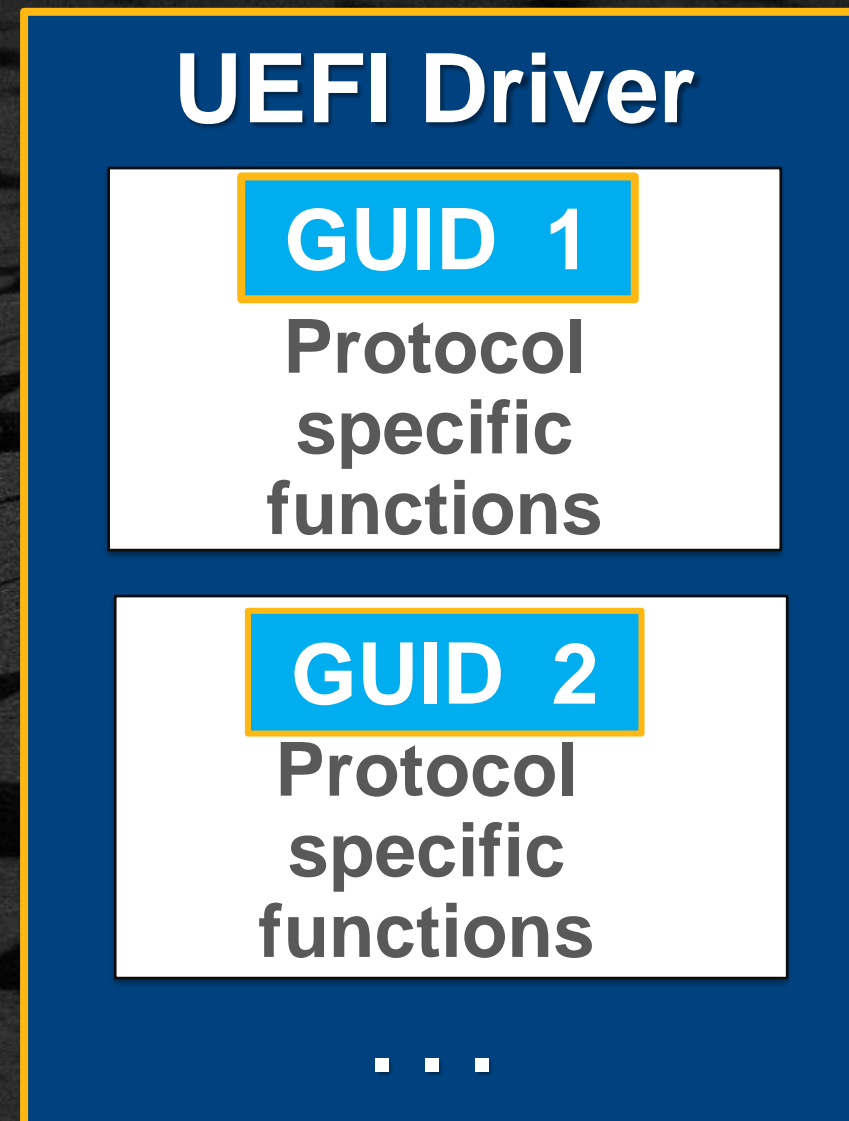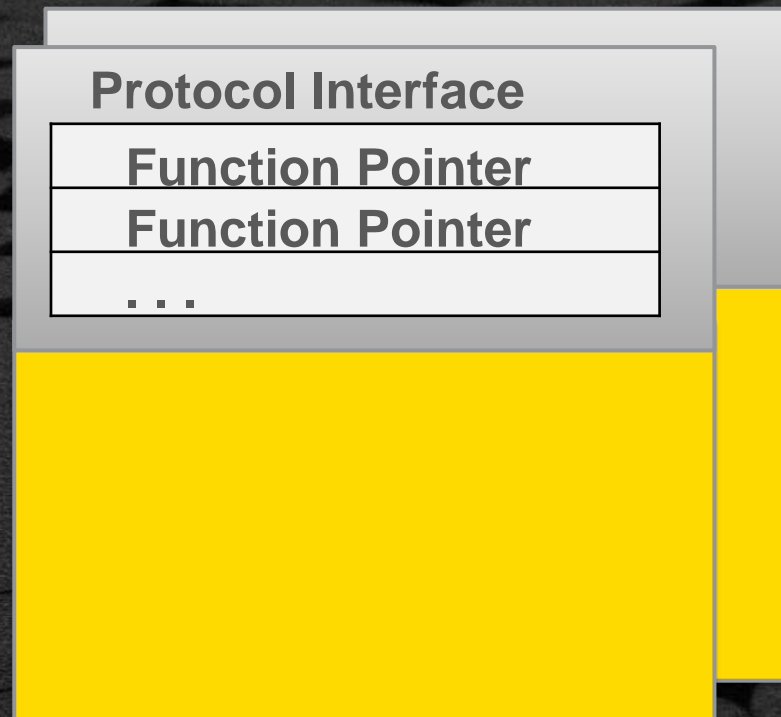



Drivers Produce Protocols



Construction of a protocol

InstallProtocolInterface

Handle
Database

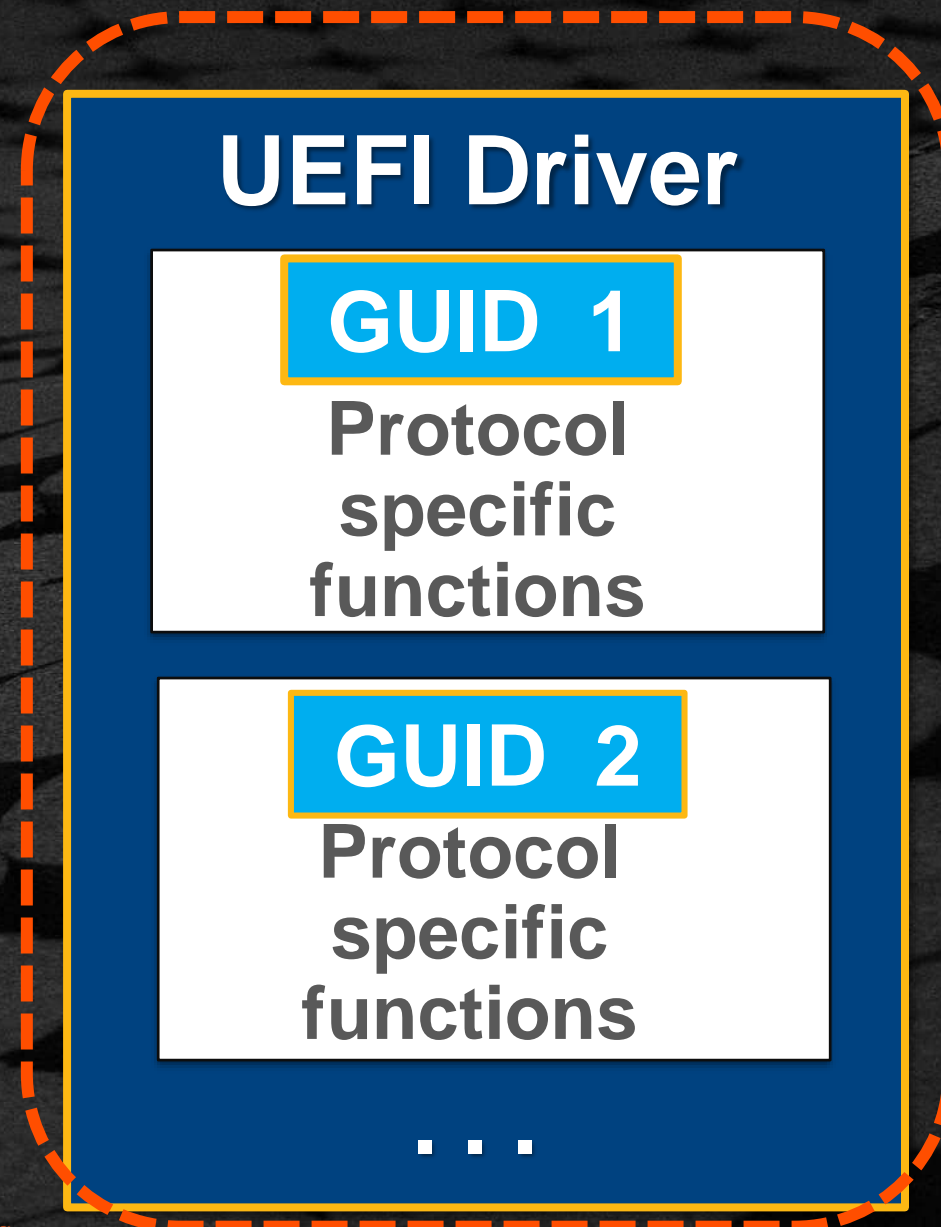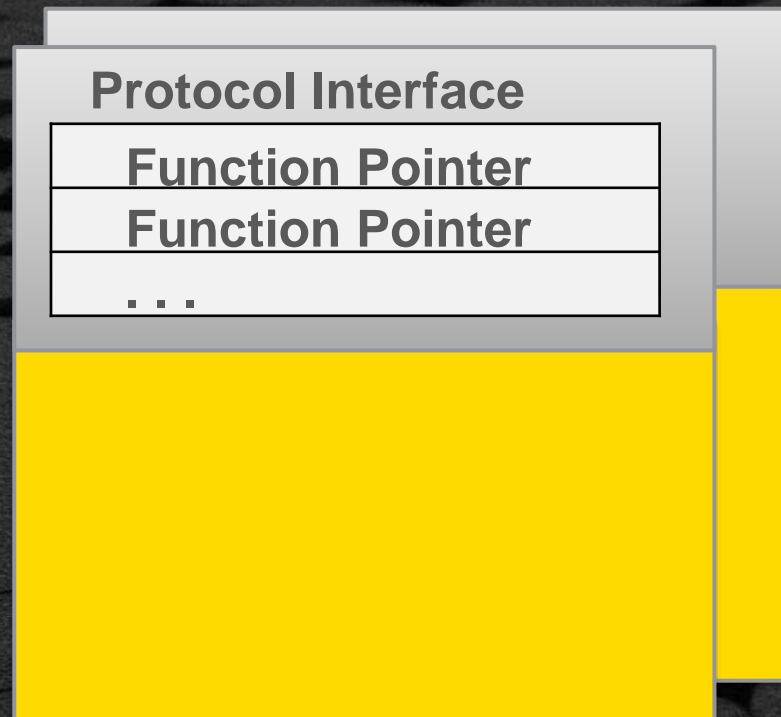



Drivers Produce Protocols



Construction of a protocol

InstallProtocolInterface



Handle
Database

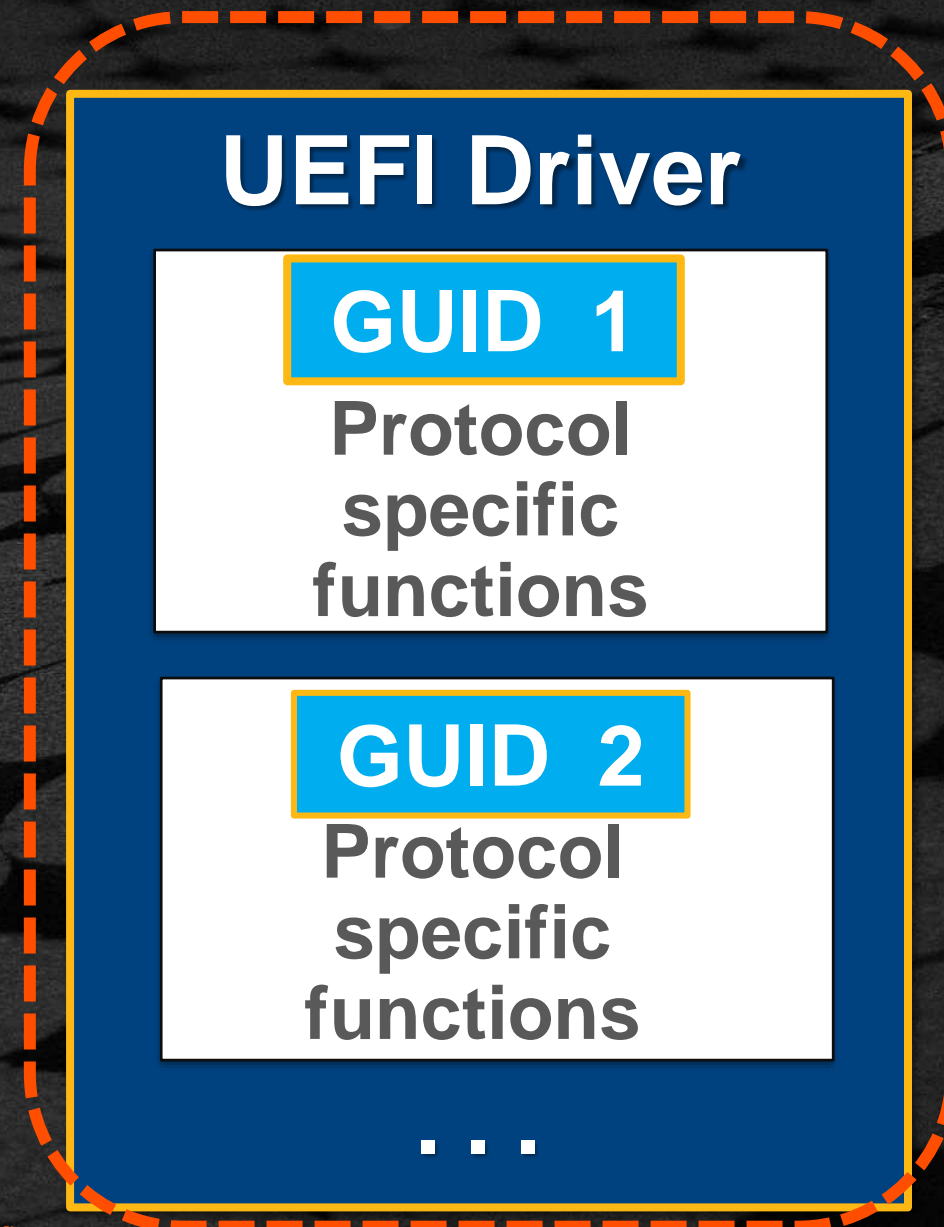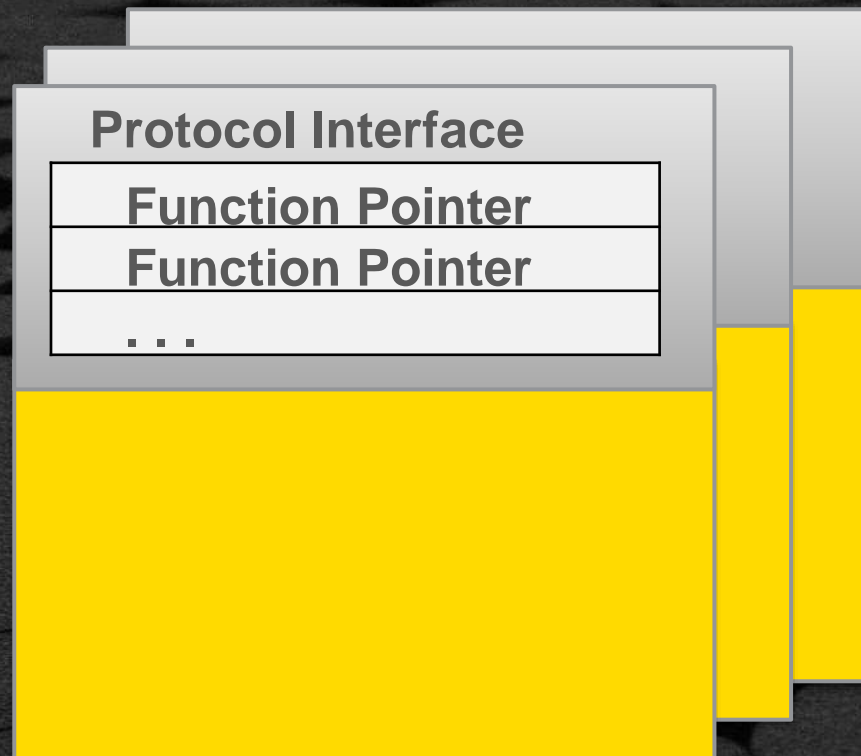

Drivers Produce Protocols

Construction of a protocol


InstallProtocolInterface

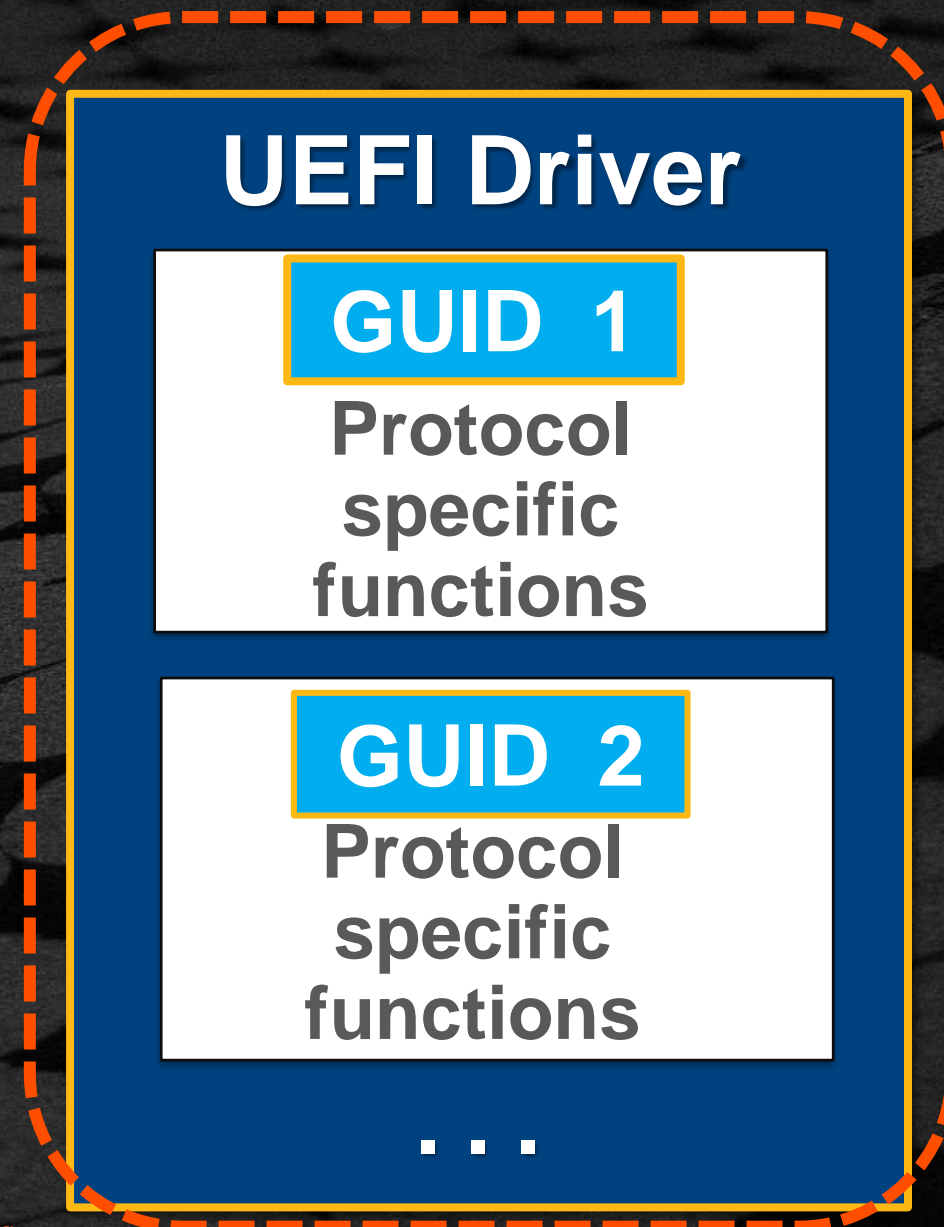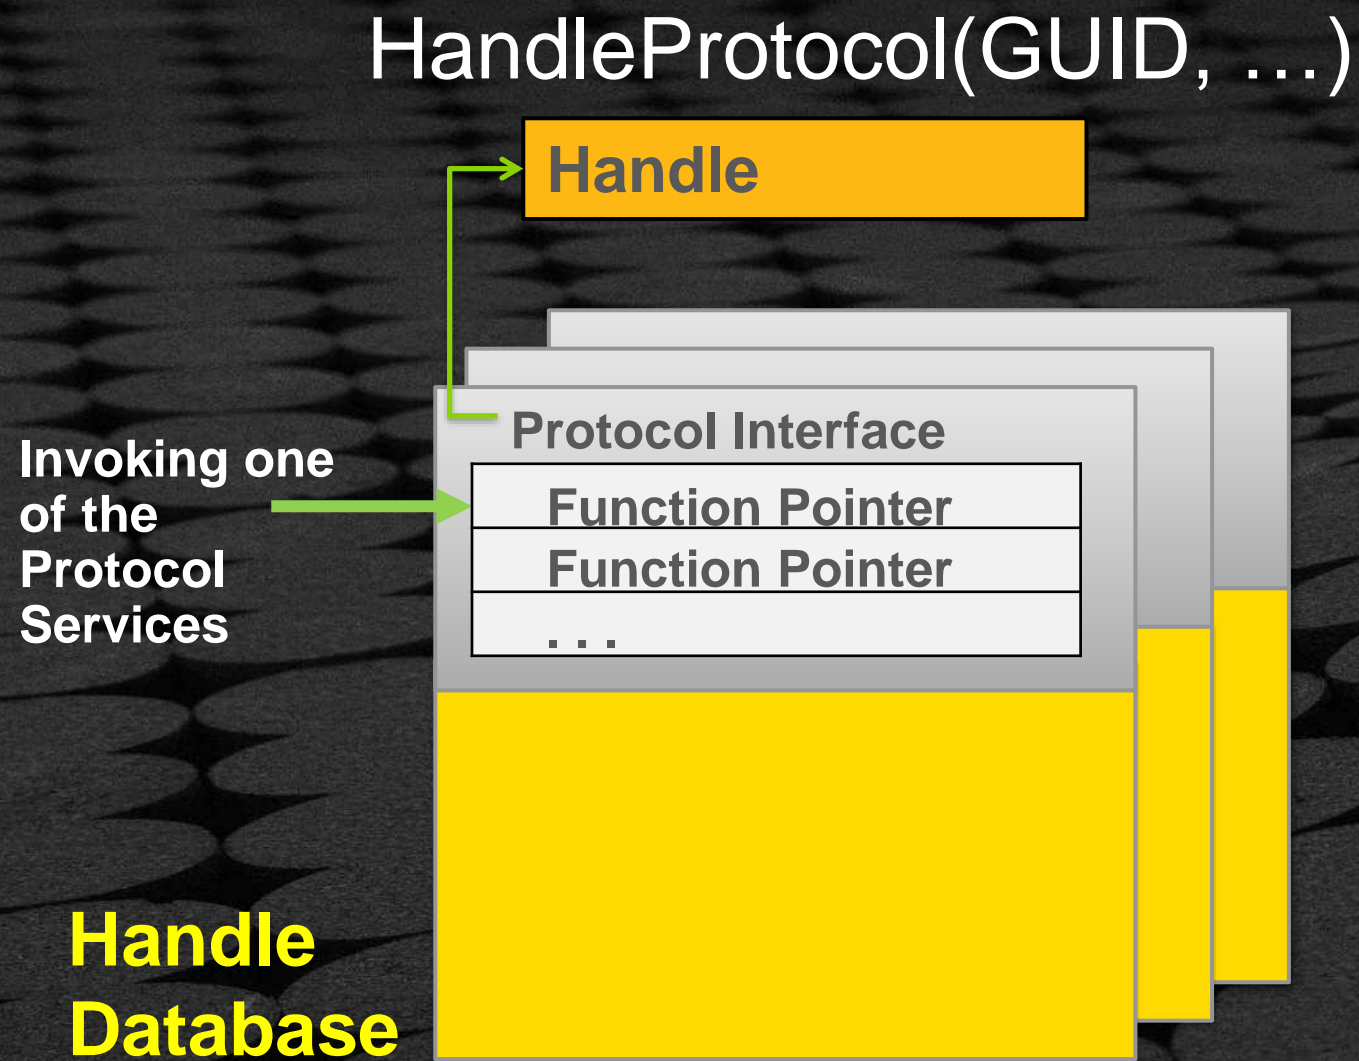

Drivers Produce Protocols

Construction of a protocol


InstallProtocolInterface

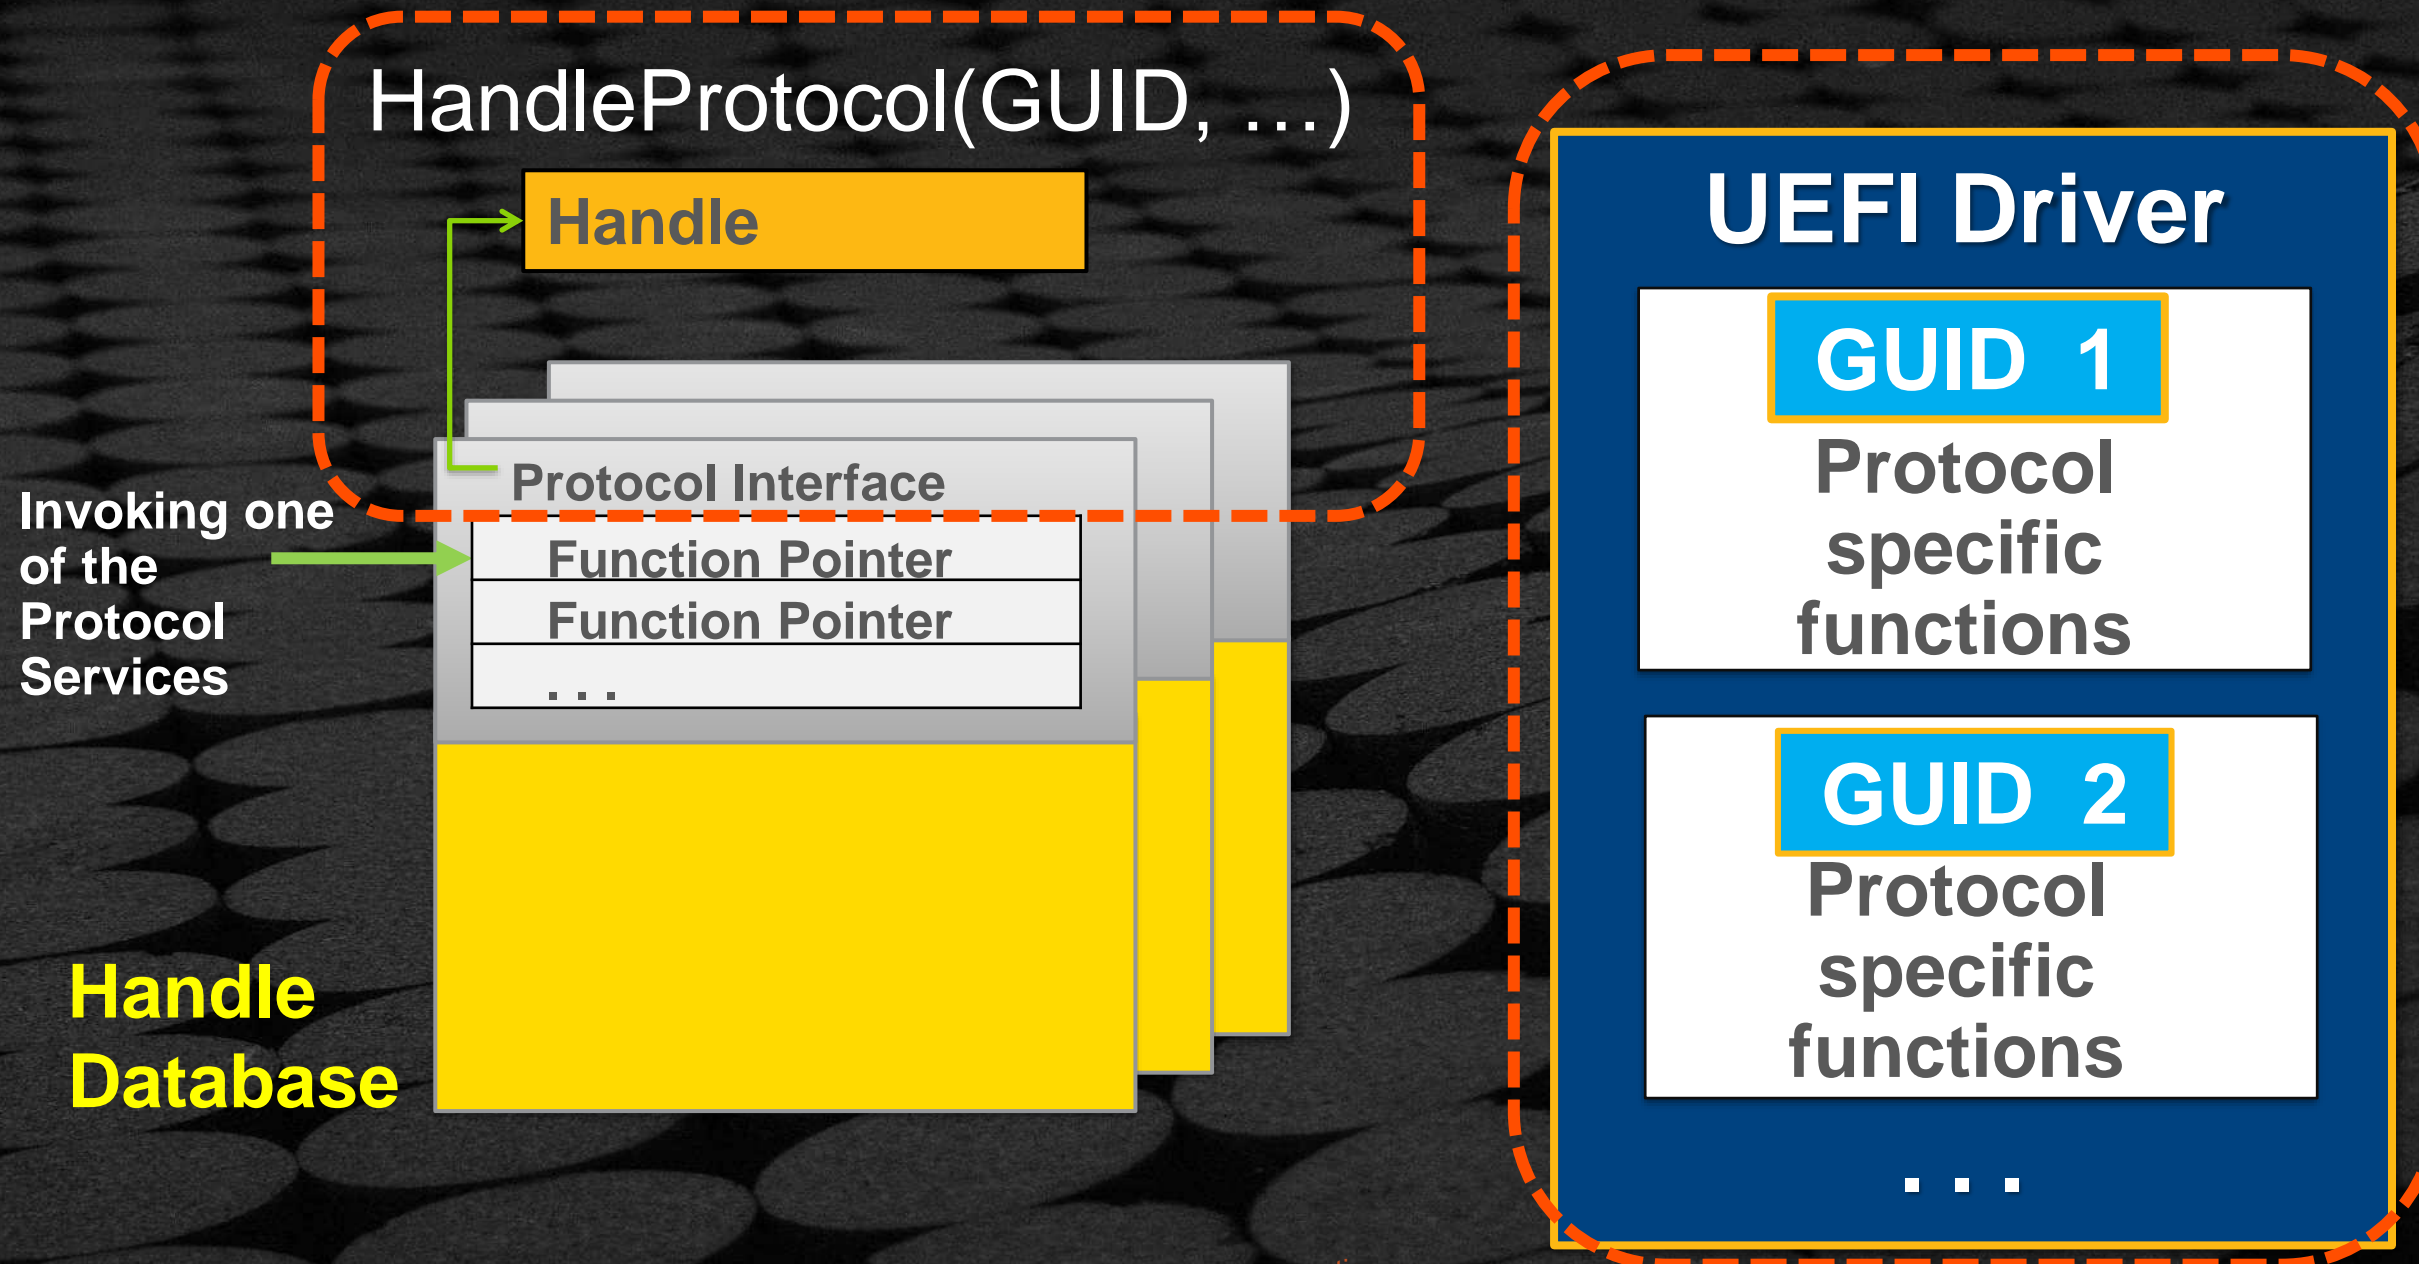

Drivers Produce Protocols

Construction of a protocol


InstallProtocolInterface

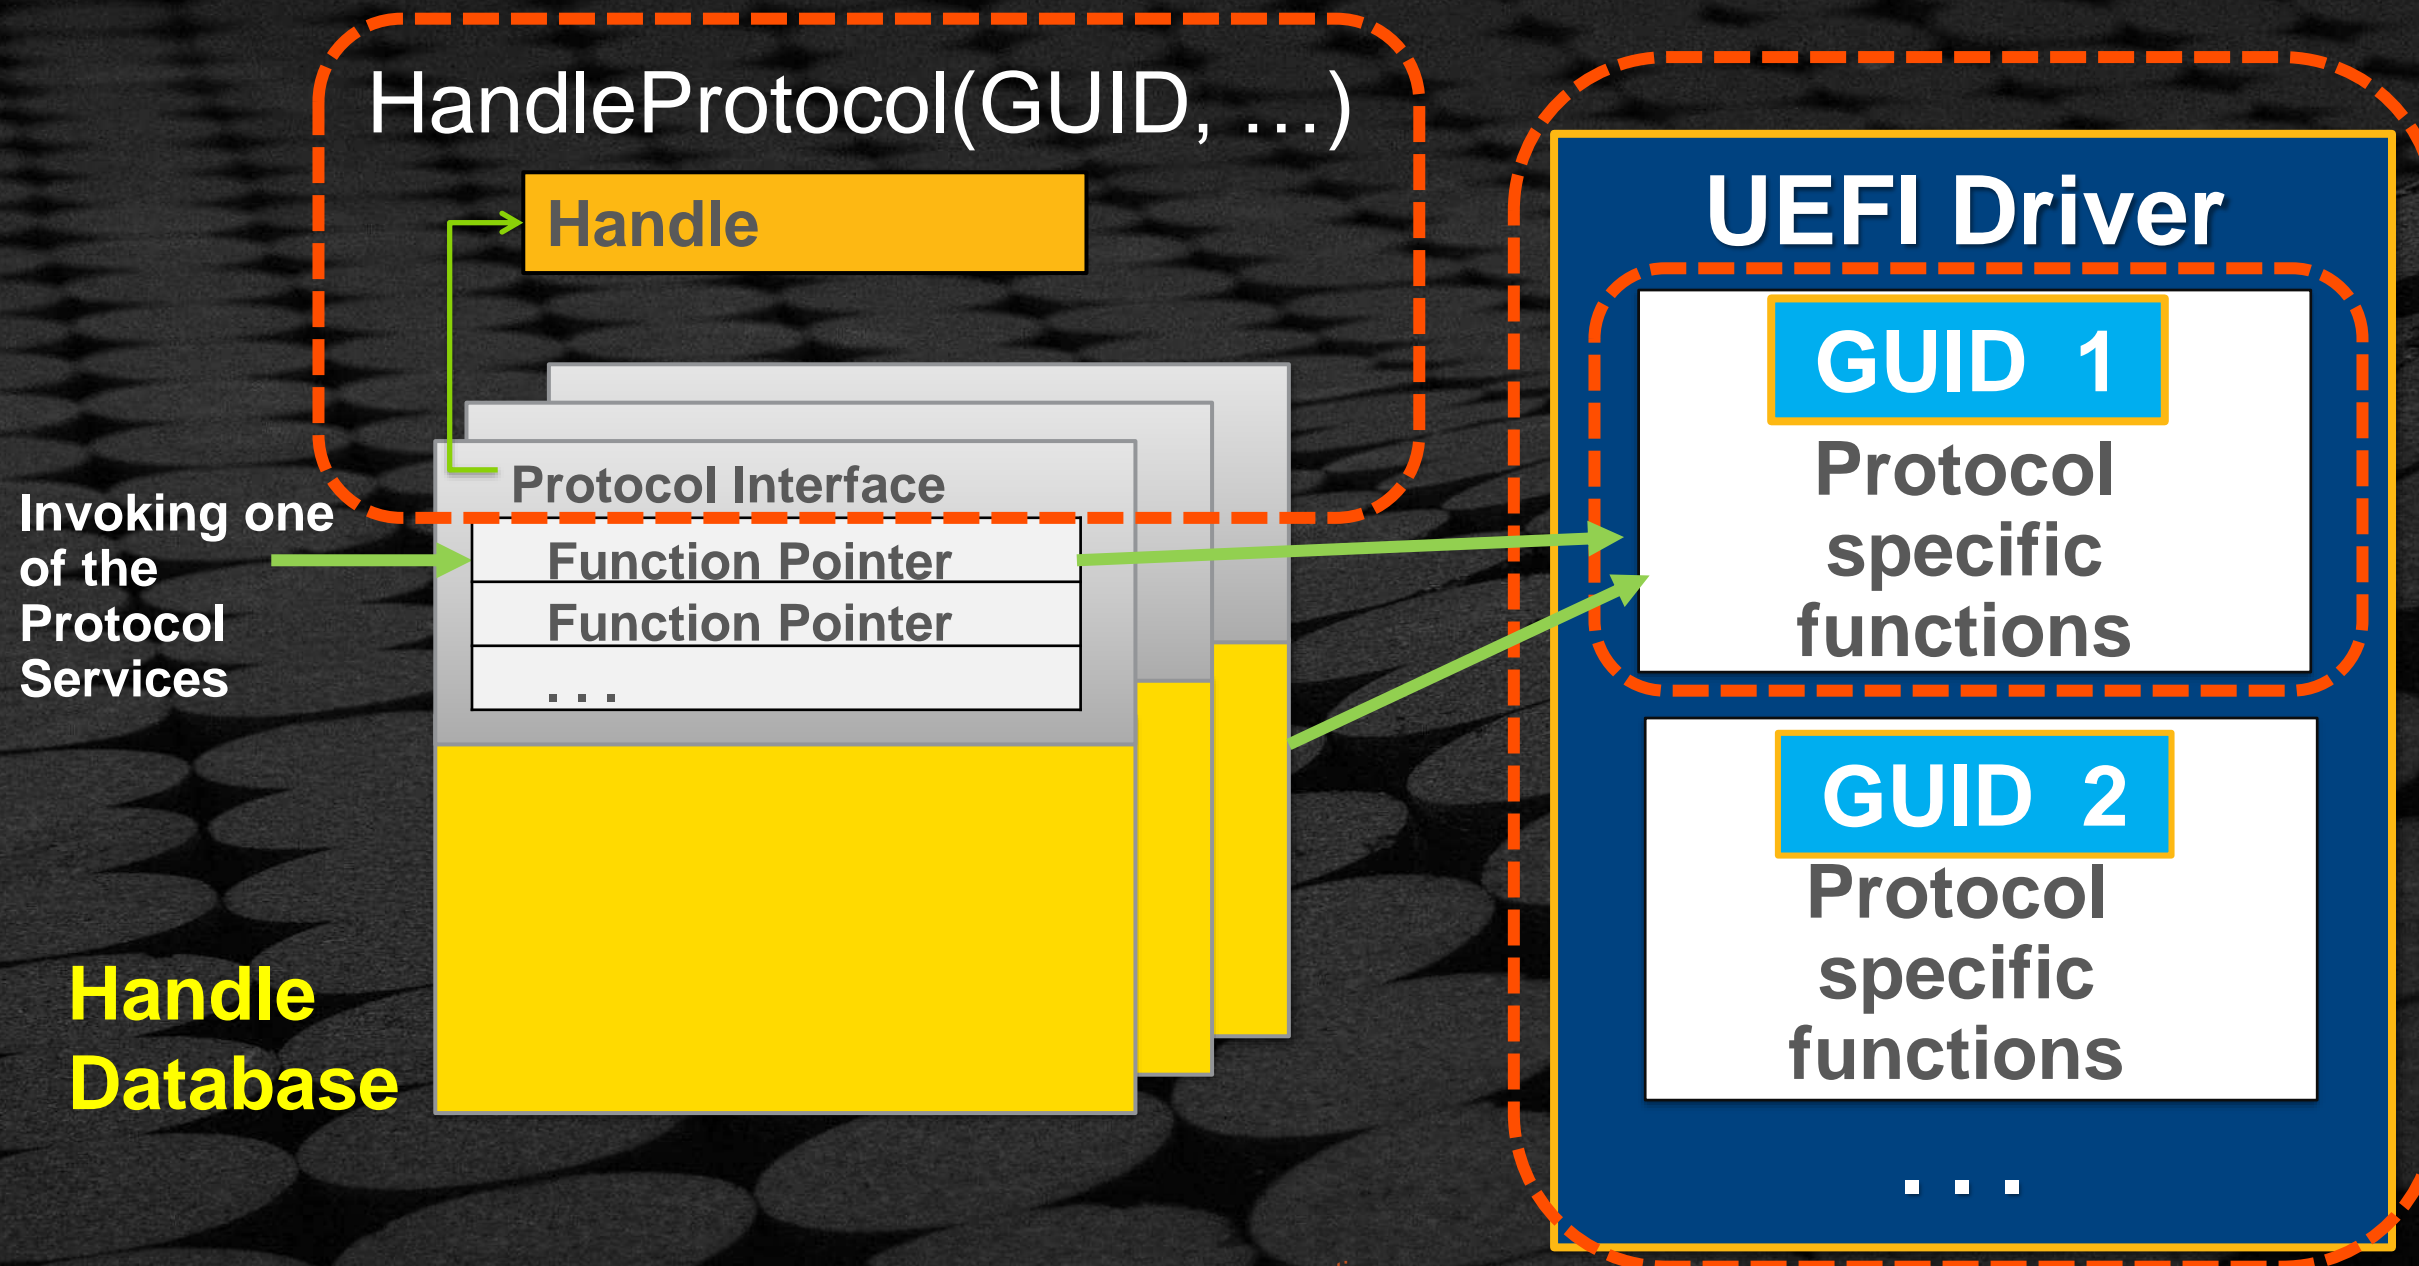

Drivers Produce Protocols

Construction of a protocol

InstallProtocolInterface

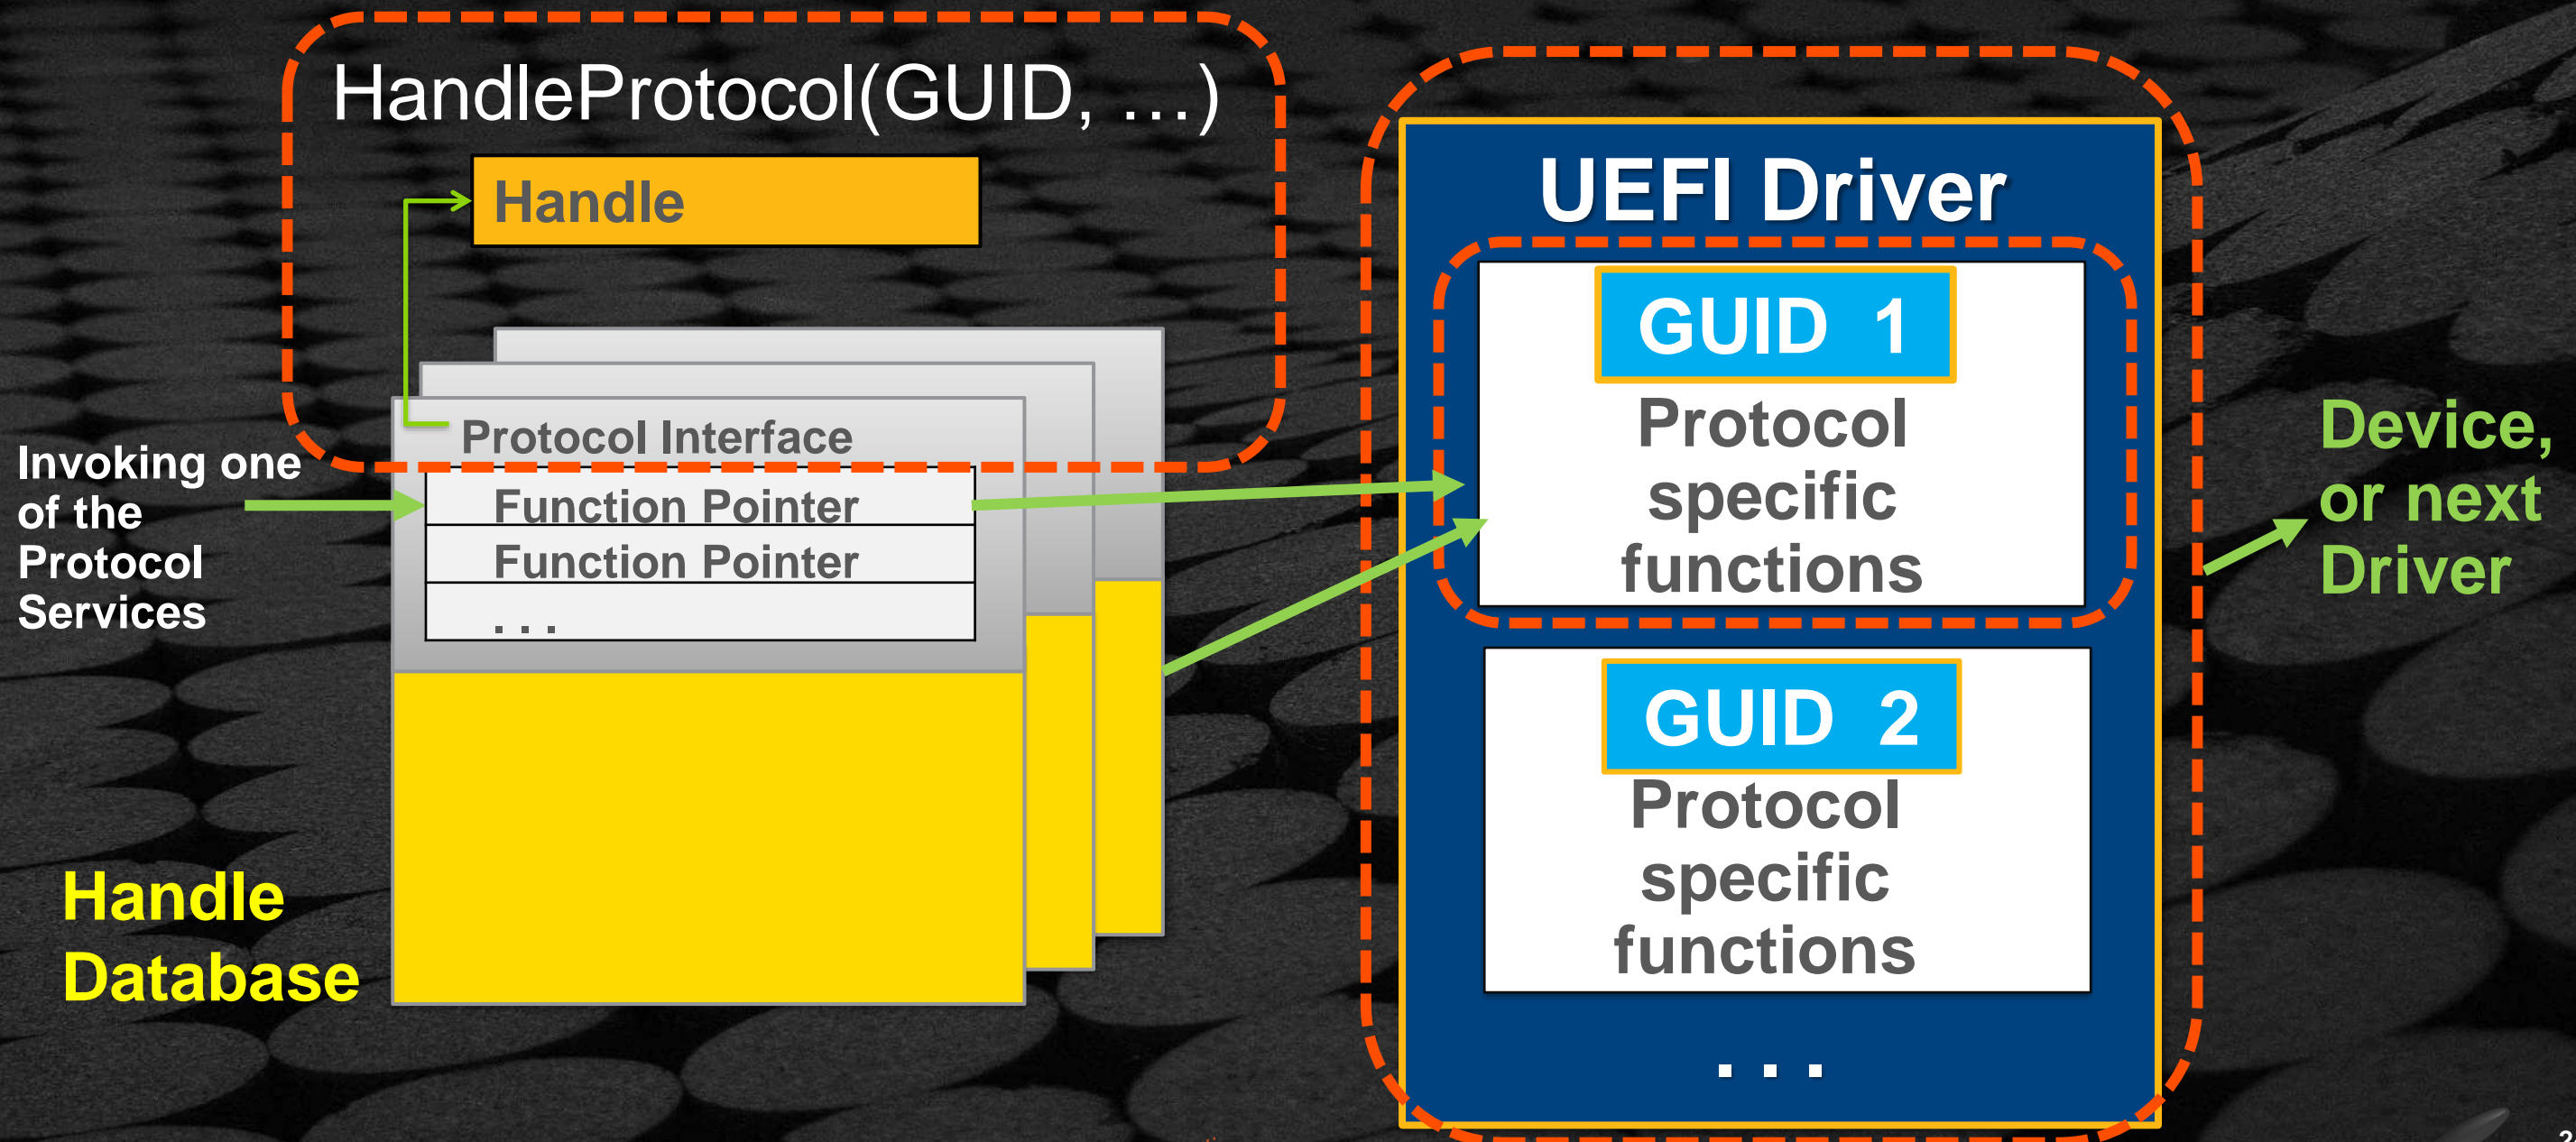

UEFI Driver Binding Protocol



Supported()

Determines if a driver supports a controller



Start()

Starts a driver on a controller & Installs Protocols



Stop()

Stops a driver from managing a controller

Supported - PCI Controller Device Handle

PCI Controller Device Handle

EFI_DEVICE_PATH_PROTOCOL

EFI_PCI_IO_PROTOCOL

Tasks

1. **Opens** PCI_IO Protocol
2. Checks
3. **Closes** PCI_IO Protocol
4. Returns: *Supported* or *Not Supported*

See § 10.1 UEFI 2.x Spec.

Inputs:

- “This”
- Controller to manage
- Remaining Device Path

Supported()

- Checks to see if a driver supports a controller
- Check should not change hardware state of controller
- Minimize execution time, move complex I/O to Start()
- May be called for controller that is already managed
- Child is optionally specified

Start - PCI Controller Device Handle

PCI Controller Device Handle

EFI_DEVICE_PATH_PROTOCOL

EFI_PCI_IO_PROTOCOL

EFI_BLOCK_IO_PROTOCOL

Inputs:

- “This”
- Controller to manage,
- Remaining Device Path

Start()

- **Opens** PCI I/O
- Starts a driver on a controller
- Can create ALL child handles or ONE child handle

Stop - PCI Controller Device Handle

PCI Controller Device Handle

EFI_DEVICE_PATH_PROTOCOL

EFI_PCI_IO_PROTOCOL

EFI_BLOCK_IO_PROTOCOL

Inputs:

- “This”
- Controller to manage,
- Remaining Device Path

Stop()

- **Closes** PCI I/O
- Stops a driver from managing a controller
- Destroys all specified child handles
- If no children specified, controller is stopped
- Stopping a bus controller requires 2 calls
 - One call to stop the children. A second call to stop the bus controller itself

Stop - PCI Controller Device Handle

PCI Controller Device Handle

EFI_DEVICE_PATH_PROTOCOL

EFI_PCI_IO_PROTOCOL

Inputs:

- “This”
- Controller to manage,
- Remaining Device Path

Stop()

- **Closes** PCI I/O
- Stops a driver from managing a controller
- Destroys all specified child handles
- If no children specified, controller is stopped
- Stopping a bus controller requires 2 calls
 - One call to stop the children. A second call to stop the bus controller itself

UEFI DRIVER EXAMPLE

Examine details of the UEFI Driver - ScsiDiskDxe

Example: UEFI Driver - ScsiDiskDxe



[edk2/MdeModulePkg/Bus/Scsi/ScsiDiskDxe](#)

- ScsiDiskDxe.inf
- ScsiDisk.c
- ScsiDisk.h

Example: UEFI Driver - ScsiDiskDxe



[edk2/MdeModulePkg/Bus/Scsi/ScsiDiskDxe](#)

- ScsiDiskDxe.inf
- ScsiDisk.c
- ScsiDisk.h



.inf

 [.inf] Entry, Global Protocols

Example: UEFI Driver - ScsiDiskDxe

```
[Defines]
  INF_VERSION           = 0x00010005
  BASE_NAME             = ScsiDisk
  MODULE_UNI_FILE       = ScsiDisk.uni
  FILE_GUID             = 0A66E322-3740-4cce-AD62-BD172CECCA35
  MODULE_TYPE           = UEFI_DRIVER
  VERSION_STRING        = 1.0

  ENTRY_POINT           = InitializeScsiDisk

[Sources]
  ComponentName.c
  ScsiDisk.c
  ScsiDisk.h

[Packages]
  MdePkg/MdePkg.dec
```


[Link to .inf](#)

Example: UEFI Driver - ScsiDiskDxe



[edk2/MdeModulePkg/Bus/Scsi/ScsiDiskDxe](https://github.com/tianocore/edk2/MdeModulePkg/Bus/Scsi/ScsiDiskDxe)

- ScsiDiskDxe.inf
- ScsiDisk.c
- ScsiDisk.h

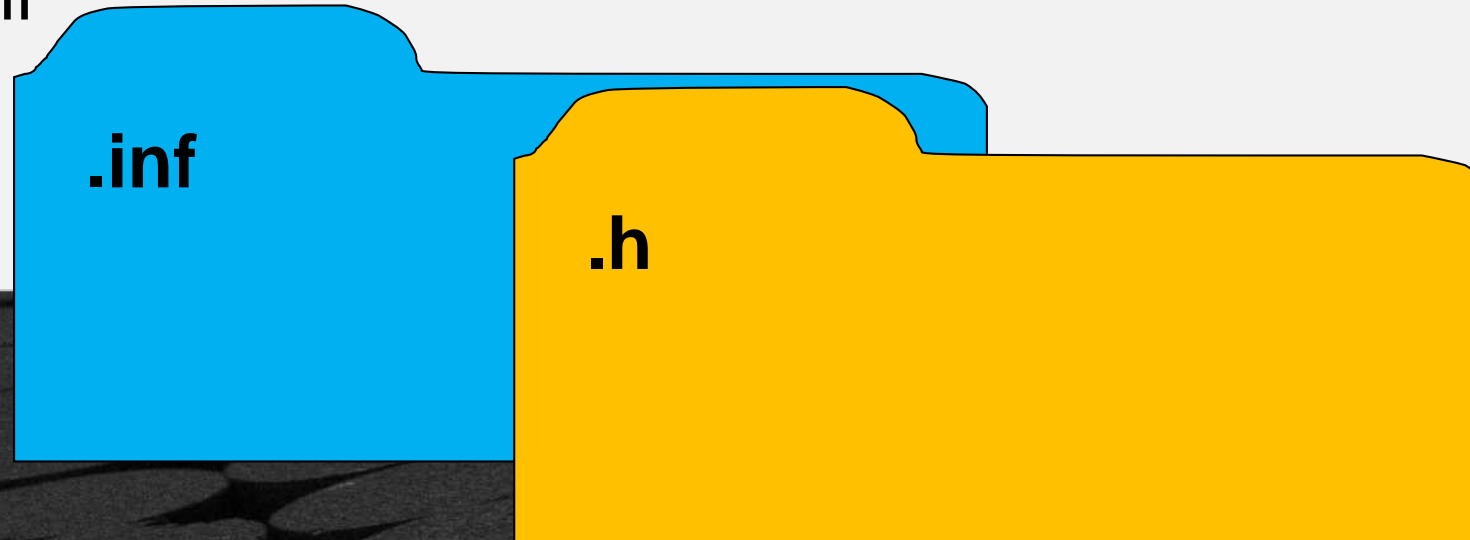

[.inf] Entry, Global Protocols



[.h] Driver's Private Data Structure declaration

Example: ScsiDisk.h

```
#ifndef _SCSI_DISK_H_  
#define _SCSI_DISK_H_  
  
#include <Uefi.h>  
  
#include <Protocol/ScsiIo.h>  
#include <Protocol/ComponentName.h>  
#include <Protocol/BlockIo.h>  
#include <Protocol/BlockIo2.h>  
#include <Protocol/EraseBlock.h>  
#include <Protocol/DriverBinding.h>  
#include <Protocol/ScsiPassThruExt.h>  
#include <Protocol/ScsiPassThru.h>  
#include <Protocol/DiskInfo.h>
```


[Link to ScsiDisk.h](#)

Example: UEFI Driver - ScsiDiskDxe



[edk2/MdeModulePkg/Bus/Scsi/ScsiDiskDxe](https://github.com/tianocore/edk2/MdeModulePkg/Bus/Scsi/ScsiDiskDxe)

- ScsiDiskDxe.inf
- ScsiDisk.c
- ScsiDisk.h

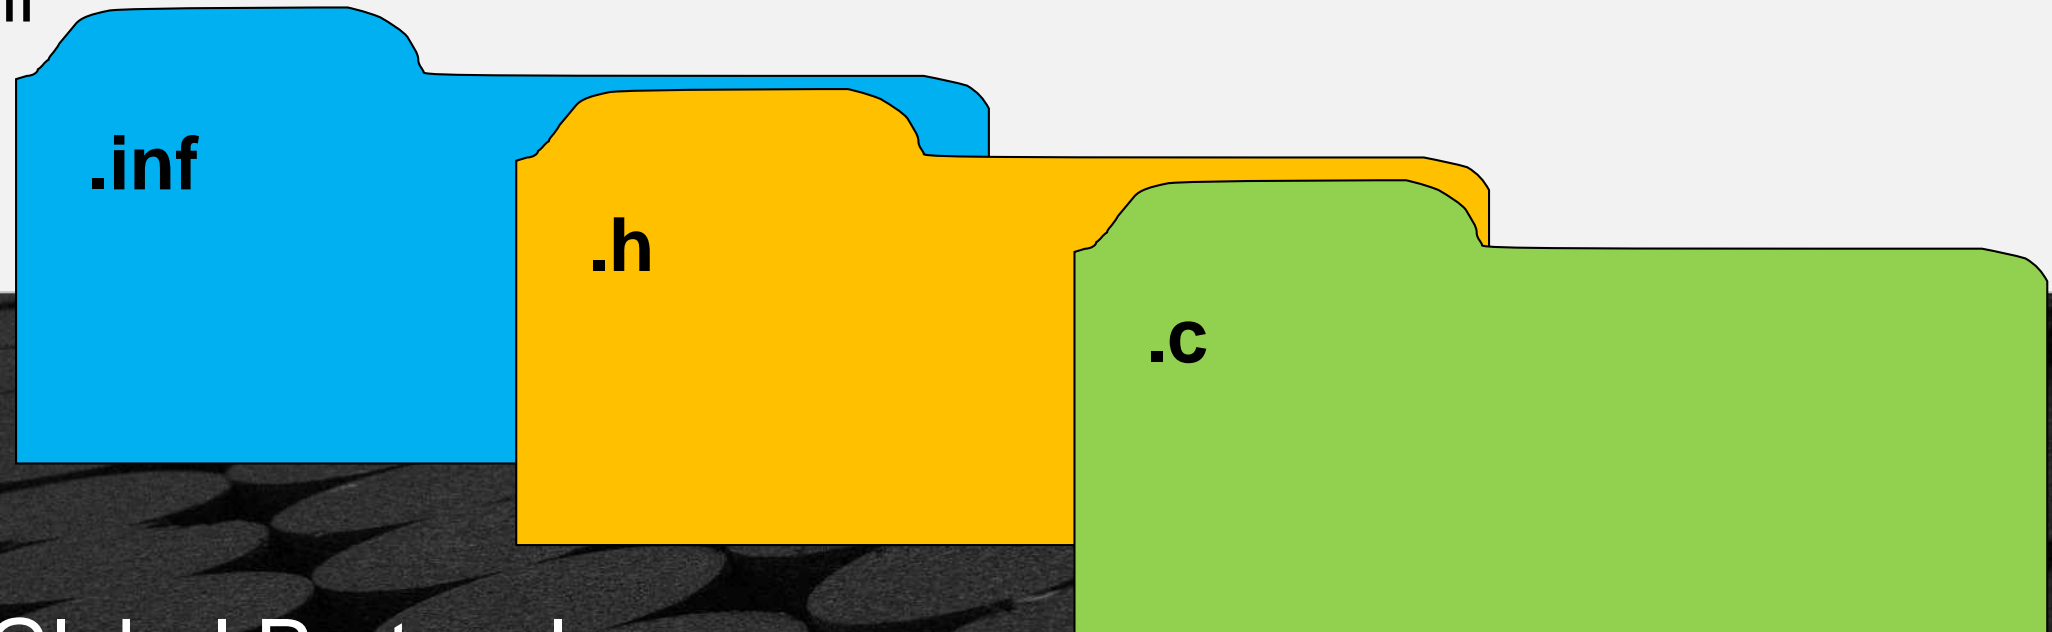

-  [.inf] Entry, Global Protocols
-  [.h] Driver's Private Data Structure declaration
-  [.c] Review the Supported, Start and Stop functions

Example: ScsiDisk.c

```
#include "ScsiDisk.h"
```

```
EFI_DRIVER_BINDING_PROTOCOL gScsiDiskDriverBinding = {  
    ScsiDiskDriverBindingSupported,  
    ScsiDiskDriverBindingStart,  
    ScsiDiskDriverBindingStop,  
    0xa,  
    NULL,  
    NULL  
};
```

```
EFI_DISK_INFO_PROTOCOL gScsiDiskInfoProtocolTemplate = {  
    EFI_DISK_INFO_SCSI_INTERFACE_GUID,  
    ScsiDiskInfoInquiry,  
    ScsiDiskInfoIdentify,  
    ScsiDiskInfoSenseData,  
    ScsiDiskInfoWhichIde  
};
```

[Link to ScsiDisk.c](#)

SUMMARY

- ★ What is the UEFI Driver Model
- ★ Details on Driver Binding Protocol
- ★ Example of UEFI Driver

Questions?



Return to Main Training Page



Return to Training Table of contents for next presentation [link](#)

