1 Introduction

Before each statistical analysis, data cleaning is often required to ensure good data quality. Data cleaning is the process of detecting errors and inconsistencies in data sets Chapman_2005. In practice, the data cleaning step is often more time consuming than the subsequent statistical analysis, particularly, when the analysis relies on the joining of multiple data sources.

When dealing with chemical data sets (e.g. environmental monitoring data, toxicological data), a first step is often to validate the names of chemicals or to link them to unique codes that simplify subsequent querying and appending of compound-related physico-chemical or toxicological information. Several web sources provide chemical names or link them to unique codes (see also section *Data sources* below). However, manual searching for each compound, often through a graphical web interface, is tedious, error-prone and not reproducible Peng₂009.

To simplify, robustify and automate this task, i.e. to search and retrieve chemical information from the web, we created the webchem package for the free and open source R language r_2015 , $Wehrens_2011$. Risoneof the most widely used software environments for data

In the following, we describe the basic functionality of the package and demonstrate with a few use cases how to clean and retrieve new data with webchem.

2 Implementation and design details

The webchem package is written entirely in R and available under a MIT license. The development repository is hosted on github and a stable version is released on the official R repository cran. webchem is part of the rOpenSci project boettiger2015building, which aims at fully reproducible data analysis.

webchem follows best practices for scientific software wilson $best_2014$, $poisot_best_2015$, namely: (i) apublicavailable repository with easy collaboration and an issue tracker (via Git Hub), (ii) a non-

 $restrictive license, version control (git), (iii) an elaborate test-suite covering more than 90\% of the relevant lines of source documentation (using roxygen 2 wickham_roxygen 2:2015) and (vi) compliance with a styleguide wickham_a with a styleguide with a styleguide wickham_a with a styleguide with a styleguid$

webchem builds on top of the following R packages: RCurl $lang_r curl :_2$ 015 $andhttrwickham_httr fordatatrans fer, stringrwickham_stringr :_2 015 forstringhandling, xml2wickham_rn$

Some data sources provide application programming interfaces (API). Web APIs define functions that allow accessing services and data via http and return data in a specific way, webshow uses the API of a data source provider where

data in a specific way. webchem uses the API of a data source provider, where available. For sources where an API is lacking, data is directly searched and extracted from the web pages, analogous to manual interaction with a website.

Only few design decisions have been made: Each function name has a prefix and suffix separated by an underscore Chamberlain $_{S}zocs_{2}013. They follow the format of source_function, e.g. cs$

webchem is friendly to the resources of data providers. Between each request there is a time-out of 0.3 to 2 seconds depending on the data source. Therefore, processing of larger data sets can take some time, but still represents a major improvement compared to manual lookup. We provide a link to the *Terms of* *Use* of data providers in the documentation of each function and we encourage the users to read these before using webchem. Moreover, all functions return an URL of the source, which can be used for (micro-)attribution.

3 Data sources

The backbone of webchem are data sources providing their data and functionality to the public. Currently, data can be retrieved from 11 sources. These cover a broad spectrum of available data, like identifiers, experimental and predicted properties and regulatory information (Figure 1, a detailed overview of all sources is included as supplement):

- NIH Chemical Identifier Resolver (CIR) cir A web service that converts from and to various chemical identifiers.
- Chemical Translation Service (CTS) Wohlgemuth_H $aldiya_Willighagen_Kind_Fiehn_2010$ A web service that converts from and to various chemical identifiers.
- ETOX etox Information System Ecotoxicology and Environmental Quality Targets by the German Federal Environmental Agency. Provides basic identifiers, synonyms, ecotoxicological data and quality targets for different countries.
- PAN Pesticide Database pan Information on pesticides provides basic identifiers, ecotoxicological data and chemical properties.
- **SRC Physprop physprop** Contains physical properties for over 41,000 chemicals. Physical properties collected from a wide variety of sources including experimental and modeled values.
- **PubChem Kim**₂016 PubChem is a public repository for information on chemical substances, providing identifiers, properties and synonyms. We use an interface to the PUG-REST web service $Kim_Thiessen_Bolton_Bryant_2$ 015. Wikipediacontains information
- Wikidata **@ikinpendium of Pesticide Common Names wood** The compendium provides information on pesticide common names, identifiers and classification.
- ChemIDplus Tomasulo₂002 is a large web-based database provided by the National Library of Medicine. It provides identifiers, synonyms, toxicological data and chemical properties.
- ChemSpider pence_chemspider: 2 010 is a free chemical structure database providing access to over 40 million structures. It provides identifiers, properties and can also be used to convert identifiers.
- **OPSIN Lowe**_Corbett_Murray Rust_Glen₂011 The Open Parser for Systematic IUPAC nomenclature is a chemical name interpreter and provides InChI and SMILES identifiers.

Though the data sources exhibit some overlap in the provided information, each has been selected because it also provides unique information and we encourage the interested reader to consult the related source for details. However, we provide a brief overview in the Supporting Information.

4 Use cases

4.1 Installation

webchem can be easily installed and loaded from CRAN:

```
install.packages("webchem")
library("webchem")
```

The package is under active development. The latest development version is available from GitHub and also permanently available at zenodo. This document has been created using webchem version 0.1.

4.2 Sample data sets

To demonstrate the capabilities of webchem we use two small publicly available real world data sets. The data sets are only used for purpose of demonstration, have been slightly preprocessed (not shown) and are available through the package.

(i) jagst: This data set comprises environmental monitoring data of organic substances in the river Jagst, Germany, sampled in 2013. The data is publicly available and can be retrieved from lubw₂016. It comprises concentrations (in $\mu g / L$) of 34 substances on 13 sampling occasions. First we load the data set and inspect the first six rows:

This data set identifies substances only by substance names. Values below the limit of quantification (LOQ) are indicated by a qualifier column.

(ii) lc50: This data consists of median acute lethal concentration for the water flea $Daphnia\ magna$ in 48 h tests $(LC_{50,D.magna,48h})$ of 124 insecticides. The data has been retrieved from the EPA ECOTOX database epa₂016.

```
data("1c50")
head(1c50)
##
                      value
          cas
## 4 50-29-3
                  12.415277
## 12 52-68-6
                  1.282980
## 15 55-38-9
                  12.168138
## 18 56-23-5 35000.000000
## 21 56-38-2
                   1.539119
## 36 57-74-9
                  98.400000
```

This data set identifies the substances only by CAS numbers.

4.3 Query identifiers

The jagst data set covers 34 substances that are identified by (German) names. Merging and linking these to other tables is hampered by differences and ambiguity in compound names.

One possibility to resolve this, is to use different chemical identifiers allowing easy identification. There are several identifiers available, e.g. registry numbers like CAS or EC, database identifiers like PubChemCID $Kim_2016orChemSpiderIDpence_chemspider :_2 010, line$

As we are are dealing with German substance names we start to query ETOX for CAS registry numbers. A common work flow when dealing with web resources is to 1) query a unique identifier of the source, 2) use this identifier to retrieve additional information and 3) extract the parts that are needed from the R object Chamberlain_S $zocs_2013$.

First we search for ETOX internal ID numbers using the substance names:

```
subs <- unique(jagst$substance)</pre>
ids <- get_etoxid(subs, match = 'best')</pre>
head(ids)
##
     etoxid
                                        match distance
                                                                          query
## 1
       8668
                2,4-Dimethylphenol (8668)
                                                            2,4-Dimethylphenol
                                                      0
## 2
       8494 4-Chlor-2-methylphenol (8494)
                                                      0 4-Chlor-2-methylphenol
## 3
                                                   <NA>
       <NA>
                                         <NA>
                                                            4-para-nonylphenol
## 4
       8397
                            Atrazin (8397)
                                                      0
                                                                        Atrazin
                                                      0
## 5
       7240
                             Benzol (7240)
                                                                         Benzol
## 6
                    Desethylatrazin (7331)
                                                               Desethylatrazin
```

Only three substances could not be found in ETOX. Here we specify that only the 'best' match (in terms of the Levenshtein distance between query and results) is returned. A manual check confirms appropriate matches. Other options include: 'all' - returns all matches; 'first' - returns only the first match (not necessarily the best match); 'ask' - this enters an interactive mode, where

the user is asked for a choice if multiple matches are found and 'na' which returns NA in case of multiple matches.

We use these data to retrieve basic information on the substances.

```
etox_data <- etox_basic(ids$etoxid)</pre>
```

webchem always returns a named list (one entry for each substance) and the available information content can be very voluminous. Therefore, we provide extractor functions for the common identifiers: CAS, SMILES and InChIKevs.

A variety of data are available and we cannot provide extractor functions for each of those. Therefore, if users need to extract other data, they have to write simple extractor functions (see following examples).

In the same manner, we can now query other identifiers from another source using these CAS numbers (Figure 1), like PubChem

```
cids <- get_cid(etox_cas)
pc_data <- pc_prop(cids, properties = c('CanonicalSMILES'))
pc_smiles <- smiles(pc_data)</pre>
```

or ChemSpider

```
csids <- get_csid(etox_cas, token = token)
cs_data <- cs_compinfo(csids, token = token)
cs_inchikey <- inchikey(cs_data)</pre>
```

Finally, we combine the queried data into one data.frame

```
res <- data.frame(name = subs, cas = etox_cas, smiles = pc_smiles,
    cid = pc_data$CID, inchikey = cs_inchikey, csid = cs_data$csid,
    stringsAsFactors = FALSE)</pre>
```

Note that in order to use the ChemSpider functions, a personal authentication key (token) is needed, which can be retrieved from the ChemSpider web page. Finally, we obtain a compound table containing many different identifiers (Table 1), allowing easy identification and merging with other data sets, e.g. the lc50 data set based on CAS.

Name	CAS	SMILES	CID	InChIKey	CSID
2,4-Dimethylphenol	105-67-9	CC1=CC(7771	KUFFULV	13839123
4-Chlor-2-methylphenol	1570 - 64 - 5	CC1=C(C	14855	RHPUJHQ	14165
4-para-nonylphenol	-	-	-	_	-
Atrazin	1912-24-9	CCNC1=N	2256	MXWJVTO	2169
Benzol	71 - 43 - 2	C1=CC=C	241	UHOVQNZ	236
Desethylatrazin	6190 - 65 - 4	CC(C)NC	22563	DFWFIQK	21157

Table 1: Identifiers for the jagst data sets as queried with webchem. Only the first 6 entries are shown. For SMILES and InChIKey only the first 7 characters are shown. - = not found.

4.4 Toxicity of different pesticide groups

Another question we might ask is *How does toxicity vary between insecticide groups?* Answering this question would require tedious lookup of insecticide groups for each of the 124 CAS numbers in the lc50 data set. The Compendium of Pesticide Common Names wood contains such information and can be easily queried using CAS numbers with webchem:

```
aw_data <- aw_query(lc50$cas, type = 'cas')</pre>
```

To extract the chemical group from the retrieved data set, we write a simple extractor function and apply this to the retrieved data:

Figure 2 displays the result after additional data cleaning (see supplement for full code). Overall, it took only 5 R statements to retrieve, clean and plot the data using ggplot2 ggplot2.

4.5 Querying partitioning coefficients

Some data sources also provide data on chemical properties that can be queried. Here we query for the lc50 data the log $P_{oct/wat}$ from the SRC PHYSPROP database to build a simple quantitative structure–activity relationship (QSAR) to predict toxicity.

```
pp_data <- pp_query(lc50$cas)</pre>
```

The database contains predicted and experimental values. Extracting $\log P_{oct/wat}$ from the data object is slightly more complicated, because i) for some compounds no data could be found and ii) the data-object has a more complex structure (a data frame within a list).

```
lc50$logp <- sapply(pp_data, function(y) {
  if (length(y) == 1 && is.na(y))
    return(NA)
  y$prop$value[y$prop$variable == 'Log P (octanol-water)']
})</pre>
```

We opted for this more complex approach, because the information available is very diverse and we cannot provide an extractor function for each purpose. Moreover, it provides users with high flexibility regarding organisation of their data. Nevertheless, in the documentation of each function we provide examples on how to extract more complicated parts of the data. The resulting data and model is displayed in Figure 3.

4.6 Regulatory information

Regulatory information is particularly of interest if concentrations exceed national thresholds. In the European Union (EU) the Water Framework Directive (WFD, wfd2000directive) defines Environmental Quality Standards (EQS). Similarly, the U.S. and Canadian EPA and the WHO define Quality Standards. Information on these standards can be queried with webchem from the PAN Pesticide Database (using pan_query()) and from ETOX (using etox_targets()).

In this example we search for the minimum EQS for the EU for the compounds in the jagst data set, join these with measured concentrations and evaluate wether exceedances occurred..

We re-use the above queried ETOX-IDs to obtain further information from ETOX, namely the MAC-EQS:

Again, the returned information is humongous and we encourage users to study the returned objects and description of the data source. Here, the column Designation defines the type of EQS and $Value_Target_LRcontainsthevalue.Unfortunately, we only found MACEQS values for 5 substances:$

```
(mac <- with(ids, ids[!is.na(mac) & is.finite(mac),</pre>
                      c('etoxid', 'query', 'mac')]))
                   query
##
      etoxid
                             mac
## 4
       8397
                 Atrazin 2.000
                  Benzol 50.000
## 5
       7240
## 11
       8836
                 Irgarol 0.016
## 12
        7442 Isoproturon 1.000
## 29
               Terbutryn 0.034
        8756
```

The $get_e toxid() function used to search ETOX-IDs returns also the original substance name (query), so that use the search experiments of the sea$

```
jagst_eqs <- merge(jagst, mac, by.x = 'substance', by.y = 'query')</pre>
head(jagst_eqs)
##
     substance
                     date value qual etoxid mac
## 1
       Atrazin 2013-09-10 0.0068
                                         8397
                                                 2
## 2
       Atrazin 2013-10-08 0.0072
                                         8397
                                                 2
## 3
       Atrazin 2013-03-26 0.0040
                                         8397
                                                 2
                                                 2
## 4
       Atrazin 2013-04-23 0.0048
                                         8397
## 5
       Atrazin 2013-11-05 0.0036
                                         8397
                                                 2
## 6
       Atrazin 2013-07-16 0.0052
                                         8397
                                                 2
```

Finally, we can compare the measured value to the MAC, which reveals that there have been no exceedances of these 5 compounds.

4.7 Utility functions

Furthermore, webchem provides also basic functions to check identifiers that can be used for data quality assessment. The functions either use simple formatting rules,

```
is.inchikey('BQJCRHHNABKAKU-KBQPJGBKS-AN')
## Hyphens not at position 15 and 26.
## [1] FALSE
is.cas('64-17-6')
## Checksum is not correct! 5 vs. 6
## [1] FALSE
```

or web resources like ChemSpider

```
is.inchikey('BQJCRHHNABKAKU-KBQPJGBKSA-5',
  type = 'chemspider')
## [1] FALSE
```

5 Discussion

5.1 Related software

Within the R ecosystem, there are only a few similar projects: rpubchem rpubchem $_2014$ provides an interface to PubChem. Similarly, Chemmine Rchemminer $_2008$, a mature chemoinformatic spackage, provides an interface to Pubchem. we be chem does not provide any chemoinformatic functionality, but integrates access to many datasources. Wiki data Rwiki datar $_2016$ provides an interface of the results of the r

5.2 Open Science

 $An increasing number of scientific data is becoming publicly available Gewin_2016, Reichman_Jones_Schildhauer_2 \\ assigned identifiers. webchemprovides an easy way to create such metatables as shown in Table 1 and facilitates chemperature. \\$

5.3 Further development

We have outlined only a few use cases that will likely be useful for many researchers. Given the huge amount of publicly available information, many other possibilities can be envisioned. webchem is currently under active development and several other data sources have not been implemented yet but may be in the future. GitHub makes contributing easy and we strongly encourage contribution to the package. Moreover, comments, feedback and feature requests are highly welcome.

6 Conclusions

Researchers need to have easy access to global knowledge on chemicals. webchem can save "hundreds of working hours" gathering this knowledge $Munch_Galizia_2016$, so that researchers can be chemically as a solution of the same of the

Acknowledgements

We thank all resource maintainers for their work making their data open to the public. We thank Johannes Ranke and Daniel Münch for their contributions to the webchem package, as well as all users who provided feedback and feature requests. We are grateful to Zacharias Steinmetz for valuable comments on the manuscript.

References


- [AppVeyor(2016)] AppVeyor (2016). URL https://www.appveyor.com/.
- [Boettiger et al.(2015)Boettiger, Chamberlain, Hart, and Ram] Boettiger C, Chamberlain S, Hart E, Ram K (2015). "Building Software, Building Community: Lessons from the ROpenSci Project." Journal of Open Research Software, 3(1).
- [Cao et al.(2008)Cao, Y, Charisi, A, Cheng, C, Jiang, T, Girke, and T] Cao, Y, Charisi, A, Cheng, C L, Jiang, T, Girke, T (2008). "ChemmineR: A Compound Mining Framework for R." Bioinformatics, 24(15), 1733–1734.
- [Chamberlain and Szöcs(2013)] Chamberlain SA, Szöcs E (2013). "taxize: Taxonomic Search and Retrieval in R." F1000Research, 2(191). URL http://f1000research.com/articles/2-191/v2.
- [Chapman (2005)] Chapman A (2005). Principles and Methods of Data Cleaning. Report for the Global Biodiversity Information Facility, Copenhagen. GBIF. ISBN 978-87-92020-04-8. URL http://www.gbif.org/orc/?doc_id = 1262.
- [CRAN(2016)] CRAN (2016). "webchem: Retrieve Chemical Information from the Web." URL https://CRAN.R-project.org/package=webchem.
- [Ertl et al.(2015)Ertl, Patiny, Sander, Rufener, and Zasso] Ertl P, Patiny L, Sander T, Rufener C, Zasso M (2015). "Wikipedia Chemical Structure Explorer: Substructure and Similarity Searching of Molecules from Wikipedia." Journal of Cheminformatics, 7(1). doi:10.1186/s13321-015-0061-y.
- [EU-WFD(2000)] EU-WFD (2000). "Directive 2000/60/EC of the European Parliament and of the Council Establishing a Framework for the Community Action in the Field of Water Policy." The European Parliament and Council, (L327/1).
- [Gewin(2016)] Gewin V (2016). "Data sharing: An Open Mind on Open Data." *Nature*, **529**(7584), 117–119. doi:10.1038/nj7584-117a.
- [GitHub(2016)] GitHub (2016). "webchem: Retrieve Chemical Information from the Web." URL https://github.com/ropensci/webchem.
- [Grabner et al.(2012)Grabner, Varmuza, and Dehmer] Grabner M, Varmuza K, Dehmer M (2012). "RMol: A Toolset for Transforming SD/Molfile Structure Information into R Objects." Source Code for Biology and Medicine, 7, 12. doi:10.1186/1751-0473-7-12.
- [Guha(2007)] Guha R (2007). "Chemical Informatics Functionality in R." Journal of Statistical Software, 18(5), 1–16.

- [Guha(2014)] Guha R (2014). rpubchem: Interface to the PubChem Collection. R package version 1.5.0.2, URL https://CRAN.R-project.org/package=rpubchem.
- [Heller et al.(2015)Heller, McNaught, Pletnev, Stein, and Tchekhovskoi]
 Heller SR, McNaught A, Pletnev I, Stein S, Tchekhovskoi D (2015).
 "InChI, the IUPAC International Chemical Identifier." Journal of Cheminformatics, 7(1). doi:10.1186/s13321-015-0068-4.
- [Howard and Meylan(2016)] Howard PH, Meylan W (2016). "Physical/Chemical Property Database (PHYSPROP)." URL http://www.srcinc.com/what-we-do/environmental/scientific-databases.htmlphysprop.
- [Keyes and Graul(2016)] Keyes O, Graul C (2016). WikidataR: API Client Library for Wikidata. R package version 1.0.1, URL https://CRAN.R-project.org/package=WikidataR.
- [Kim et al.(2015)Kim, Thiessen, Bolton, and Bryant] Kim S, Thiessen PA, Bolton EE, Bryant SH (2015). "PUG-SOAP and PUG-REST: Web Services for Programmatic Access to Chemical Information in PubChem." Nucleic Acids Research, 43(W1), W605–W611. doi:10.1093/nar/gkv396.
- [Kim et al.(2016)Kim, Thiessen, Bolton, Chen, Fu, Gindulyte, Han, He, He, Shoemaker, and et al.]
 Kim S, Thiessen PA, Bolton EE, Chen J, Fu G, Gindulyte A, Han L, He J,
 He S, Shoemaker BA, et al (2016). "PubChem Substance and Compound
 Databases." Nucleic Acids Research, 44(D1), D1202-D1213.
- [Lang and team(2016)] Lang DT, team tC (2016). RCurl: General Network (HTTP/FTP/...) Client Interface for R. R package version 1.95-4.8, URL http://CRAN.R-project.org/package=RCurl.
- [Lowe et al.(2011)Lowe, Corbett, Murray-Rust, and Glen] Lowe DM, Corbett PT, Murray-Rust P, Glen RC (2011). "Chemical Name to Structure: OPSIN, an Open Source Solution." Journal of Chemical Information and Modeling, 51(3), 739–753. doi:10.1021/ci100384d. URL http://opsin.ch.cam.ac.uk/instructions.html.
- [LUBW Landesanstalt für Umwelt, Messungen und Naturschutz Baden-Württemberg(2016)] LUBW Landesanstalt für Umwelt, Messungen und Naturschutz Baden-Württemberg (2016). "Jahresdatenkatalog Fließgewässer 2013." URL http://jdkfg.lubw.baden-wuerttemberg.de/servlet/is/300/.
- [Marwick(2016)] Marwick B (2016). "Computational Reproducibility in Archaeological Research: Basic Principles and a Case Study of Their Implementation." Journal of Archaeological Method and Theory, pp. 1–27.
- [Münch and Galizia(2016)] Münch D, Galizia CG (2016). "DoOR 2.0 Comprehensive Mapping of Drosophila Melanogaster Odorant Responses." *Scientific Reports*, **6**, 21841. doi:10.1038/srep21841.

- [NIH(2016)] NIH (2016). NIH Chemical Identifier Resolver. URL http://cactus.nci.nih.gov/chemical/structure.
- [Ooms(2014)] Ooms J (2014). "The jsonlite Package: A Practical and Consistent Mapping Between JSON Data and R Objects." arXiv preprint. URL http://arxiv.org/abs/1403.2805.
- [O'Boyle et al.(2011)O'Boyle, Guha, Willighagen, Adams, Alvarsson, Bradley, Filippov, Hanson, Hanwell, Hu
 O'Boyle NM, Guha R, Willighagen EL, Adams SE, Alvarsson J, Bradley
 JC, Filippov IV, Hanson RM, Hanwell MD, Hutchison GR, et al (2011).
 "Open Data, Open Source and Open Standards in Chemistry: The Blue
 Obelisk Five Years On." Journal of Cheminformatics, 3, 37.
- [PAN(2016)] PAN (2016). "Pesticide Action Network (PAN) Pesticide Database." URL http://www.pesticideinfo.org/.
- [Pence and Williams(2010)] Pence HE, Williams A (2010). "ChemSpider: An Online Chemical Information Resource." *Journal of Chemical Education*, 87(11), 1123–1124. doi:10.1021/ed100697w.
- [Peng(2009)] Peng RD (2009). "Reproducible Research and Biostatistics." *Biostatistics*, **10**(3), 405–408. doi:10.1093/biostatistics/kxp014.
- [Poisot(2015)] Poisot T (2015). "Best Publishing Practices to Improve User Confidence in Scientific Software." *Ideas in Ecology and Evolution*, **8**. doi: 10.4033/iee.2015.8.8.f.
- [R Core Team(2016)] R Core Team (2016). R: A Language and Environment for Statistical Computing. R Foundation for Statistical Computing, Vienna, Austria. URL https://www.R-project.org/.
- [Reichman et al.(2011)Reichman, Jones, and Schildhauer] Reichman OJ, Jones MB, Schildhauer MP (2011). "Challenges and Opportunities of Open Data in Ecology." Science, 331(6018), 703–5.
- [Stieger et al. (2014) Stieger, Scheringer, Ng, and Hungerbühler] Stieger G, Scheringer M, Ng CA, Hungerbühler K (2014). "Assessing the Persistence, Bioaccumulation Potential and Toxicity of Brominated Flame Retardants: Data Availability and Quality for 36 Alternative Brominated Flame Retardants." Chemosphere, 116, 118–123. doi: 10.1016/j.chemosphere.2014.01.083.
- [Swain(2015a)] Swain M (2015a). "ChemSpiPy." URL https://github.com/mcs07/ChemSpiPy.
- [Swain(2015b)] Swain M (2015b). "PubChemPy." URL https://github.com/mcs07/PubChemPy.
- [Swain(2016)] Swain M (2016). "CIRpy." URL https://github.com/mcs07/CIRpy.

- [Tomasulo(2002)] Tomasulo P (2002). "ChemIDplus Super Source for Chemical and Drug Information." *Medical Reference Services Quarterly*, 21(1), 53–59. doi:10.1300/J115v21n01₀4.
- [Travis-CI(2016)] Travis-CI (2016). URL https://travis-ci.org/.
- [UBA(2016)] UBA (2016). "ETOX: Information System Ecotoxicology and Environmental Quality Targets." URL https://webetox.uba.de/webETOX/index.do.
- [U.S. EPA(2016)] US EPA (2016). "ECOTOX database." URL http://cfpub.epa.gov/ecotox/.
- [Wehrens (2011)] Wehrens R (2011). Chemometrics with R: Multivariate Data Analysis in the Natural Sciences and Life Sciences. Springer. ISBN 3-642-17840-5.
- [Weininger (1990)] Weininger D (1990). "SMILES. 3. DEPICT. Graphical Depiction of Chemical Structures." *Journal of Chemical Information and Computer Sciences*, **30**(3), 237–243.
- [Wickham(2009)] Wickham H (2009). ggplot2: Elegant Graphics for Data Analysis. Springer-Verlag. ISBN 978-0-387-98140-6. URL http://had.co.nz/ggplot2/book.
- [Wickham (2011)] Wickham (2011).Η "testthat: Get Started Testing." with TheRJournal, 3, 5-10.URL http://journal.r-project.org/archive/2011-1/RJournal₂011 $1_Wickham.pdf$.
- [Wickham (2015a)] Wickham H (2015a). Advanced R. The R Series. CRC Press. ISBN 978-1-4665-8696-3.
- [Wickham(2015b)] Wickham H (2015b). rvest: Easily Harvest (Scrape) Web Pages. R package version 0.3.1, URL https://CRAN.R-project.org/package=rvest.
- [Wickham(2015c)] Wickham H (2015c). stringr: Simple, Consistent Wrappers for Common String Operations. R package version 1.0.0, URL http://CRAN.R-project.org/package=stringr.
- [Wickham(2015d)] Wickham H (2015d). xml2: Parse XML. R package version 0.1.2, URL https://CRAN.R-project.org/package=xml2.
- [Wickham(2016)] Wickham H (2016). httr: Tools for Working with URLs and HTTP. R package version 1.1.0, URL https://CRAN.R-project.org/package=httr.
- [Wickham et al.(2015)Wickham, Danenberg, and Eugster] Wickham H, Danenberg P, Eugster M (2015). roxygen2: In-Source Documentation for R. R package version 5.0.1, URL http://CRAN.R-project.org/package=roxygen2.
- [Wikipedia(2016)] Wikipedia (2016). "WikiProject Chemistry." URL https://www.wikidata.org/wiki/Wikidata:WikiProject_Chemistry.

- [Wilson et al.(2014)Wilson, Aruliah, Brown, Chue Hong, Davis, Guy, Haddock, Huff, Mitchell, Plumbley, Waugh, Wilson G, Aruliah DA, Brown CT, Chue Hong NP, Davis M, Guy RT, Haddock SHD, Huff KD, Mitchell IM, Plumbley MD, Waugh B, White EP, Wilson P (2014). "Best Practices for Scientific Computing." PLoS Biology, 12(1), e1001745. doi:10.1371/journal.pbio.1001745.
- [Wohlgemuth et al.(2010)Wohlgemuth, Haldiya, Willighagen, Kind, and Fiehn] Wohlgemuth G, Haldiya PK, Willighagen E, Kind T, Fiehn O (2010). "The Chemical Translation Service a Web-Based Tool to Improve Standardization of Metabolomic Reports." Bioinformatics, 26(20), 2647–2648. doi: 10.1093/bioinformatics/btq476. URL http://cts.fiehnlab.ucdavis.edu/.
- [Wood(2016)] Wood A (2016). "Compendium of Pesticide Common Names." URL http://www.alanwood.net/pesticides/index.
- [Zenodo(2016)] Zenodo (2016). "webchem: Retrieve Chemical Information from the Web." URL http://dx.doi.org/10.5281/zenodo.33823.

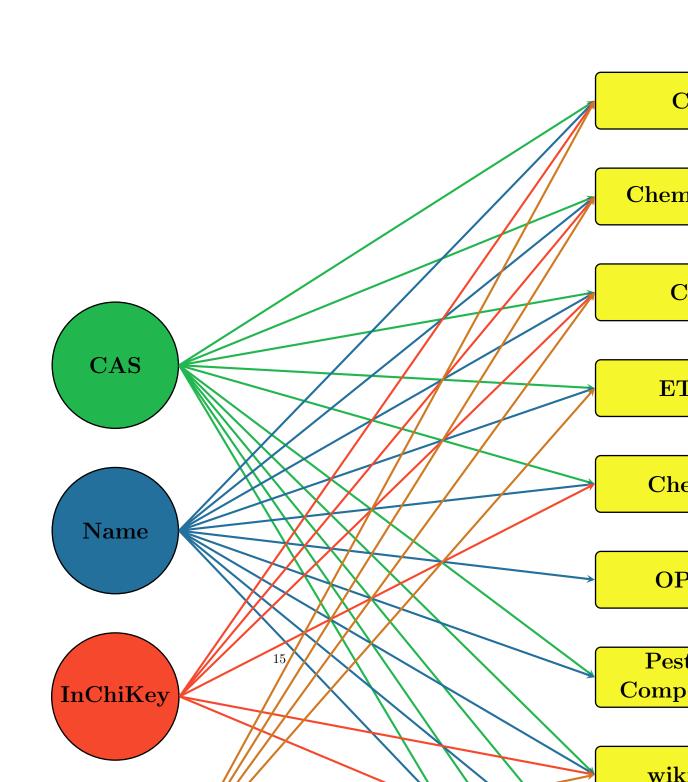




Figure 2: Toxicity of different pesticide groups. LC_{50} values have been retrieved from EPA ECOTOX database, chemical groups from the Compendium of Pesticide Common Names wood




Figure 3: Simple QSAR for predicting log LC₅₀ of pesticides by log P. Log P values have been retrieved from SRC Physprop database (97 experimental data, 9 estimated data and 18 substances without data). Blue line indicates the regression model (log LC₅₀ = 2.88-0.37 logP, RMSE = 1.45).