

inst.eecs.berkeley.edu/~eecs151

# EECS151 : Introduction to Digital Design and ICs

## Lecture 20 – Dividers

**Bora Nikolić**



### Pentium FDIV Bug (from Wikipedia)

The Pentium FDIV bug is a hardware bug affecting the floating-point unit (FPU) of the early Intel Pentium processors. Because of the bug, the processor would return incorrect binary floating point results when dividing certain pairs of high-precision numbers. The bug was discovered in 1994 by Thomas R. Nicely, a professor of mathematics at Lynchburg College. Missing values in a lookup table used by the FPU's floating-point division algorithm led to calculations acquiring small errors. While these errors would in most use-cases only occur rarely and result in small deviations from the correct output values, in certain circumstances the errors can occur frequently and lead to more significant deviations



EECS151 L20 DIVIDERS

Nikolić Fall 2021



1

## Review

- Binary multipliers have three blocks:
  - Partial-product generation (NAND or Booth)
  - Partial-product compression (ripple-carry array, CSA or Wallace)
  - Final adder
- Multipliers are often pipelined
- Constant multipliers can be optimized for size/speed
- Shifters and crossbars are common building blocks in digital systems
  - Often require customization

EECS151 L20 DIVIDERS

Nikolić Fall 2021



2

## Administrivia

- Homework 8 due this week
  - In scope for midterm
- All labs need to be checked off by today!
- Project checkpoint 2 next week
- Midterm 2 is on November 4 at 7pm
  - Review session tomorrow
  - Up to today's lecture
  - 1 page of notes allowed

3



## Dividers

4

## Pencil-And-Paper Division

	1512	quotient
3	4537	dividend
divisor	3000	$\text{divisor} * q_i * 10^i$
	1537	partial remainder
	1500	
	0037	
	0030	
	0007	
	0006	
	0001	remainder

Division is an iterative process:

$$r(i) = r(i+1) - q_i * D * 10^i$$

We usually 'guess'  $q_i$

EECS151 L20 DIVIDERS

Nikolić Fall 2021

5 Berkeley  
UNIVERSITY OF CALIFORNIA

5


## Restoring Divider

- Assume  $q_i = 1$
- Subtract divisor from  $r$ ; check if  $r(i) \geq 0$ 
  - if  $r(i) > 0$ , guess was good ( $q_i = 1$ )
  - if  $r(i) < 0$ , restore the value by adding divisor,  $q_i = 0$
- Shift divisor to right
- Repeat  $n$  times

$n$  shifts

$n$  subtractions

$n/2$  restorations

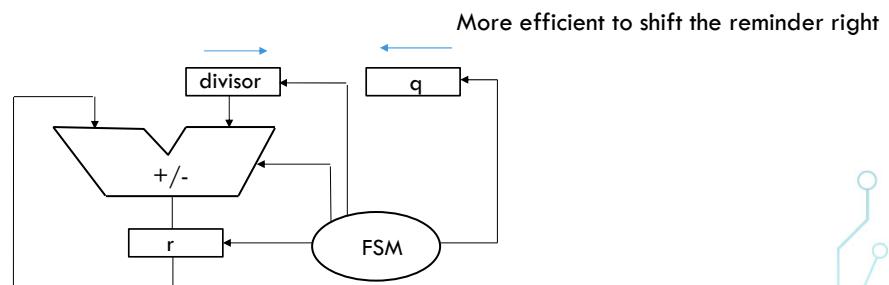

EECS151 L20 DIVIDERS

Nikolić Fall 2021

6 Berkeley  
UNIVERSITY OF CALIFORNIA

6

## Non-Restoring Divider

- Doesn't restore if  $r(i) < 0$
- Instead, adds the divisor in the next iteration
  - $n$  shifts
  - $n$  additions/subtractions

EECS151 L20 DIVIDERS

Nikolić Fall 2021

7 Berkeley  
UNIVERSITY OF CALIFORNIA

7

## Faster Dividers

- Divide in a higher radix than 2 (typically 4, i.e. guess  $q_i q_{i+1}$ )
- Keep the partial remainders in redundant form
- Sweeney-Robertson-Tocher (SRT) algorithm
  - Used in many processors

EECS151 L20 DIVIDERS

Nikolić Fall 2021

8 Berkeley  
UNIVERSITY OF CALIFORNIA

8

## Review

- Binary division is a slow, iterative process
- Non-restoring division speeds it up
- SRT divider, higher radix, redundant number representation