Comprehensive Project Scope Document

Elysia Livia Gao s222445

Technical University of Denmark
September 14, 2023

1 Introduction

1.1 Background and Context

The project aims to bridge biological and physical models to study the heterogeneity behavior in bioreactors. It involves simulating cell performance inside a reactor with high substrate variability using biological/metabolic modeling. The project is based at the Novo Nordisk Center for Biosustainability at DTU, known for its expertise in industrial biotechnology and the design of cell factories. The Quantitative Modelling of Cell Metabolism group focuses on understanding cellular behavior in different environments through mathematical simulations applied to biology.

1.2 Overview of Objectives and Proposed Methods

The project objectives include analyzing big and complex datasets from advanced biological/CFD simulations, identifying reaction clusters in dynamic metabolic networks, utilizing dimensionality reduction techniques to plot and represent multi-dimensional metabolic networks, and learning to use an HPC cluster for computing complicated tasks.

2 Scope of the Project

2.1 Description of the Project's Focus

The project focuses on studying the behavior of cells inside a bioreactor with high substrate variability in a production industrial environment. It involves the analysis of internal cell data obtained from tracking cells moving inside the reactor for a certain time.

2.2 Objective 1: Problems to be Solved

The project aims to address the following problems:

- Identifying relevant information to extract from the internal cell data
- Exploring the possibility of dataset reduction
- Analyzing similarities and trends within a single cell lifeline (e.g., cycles inside the reactor)
- Identifying similarities and trends within lifeline groups (e.g., clusters of cells)
- Determining meaningful metabolic states of the cells (e.g., cycles) and the reactions that define metabolic clusters
- Exploring innovative ways to represent the data

2.3 Importance and Relevance

Understanding the behavior of cells in a bioreactor with substrate variability is crucial for optimizing bioprocesses in industrial settings. By studying the internal cell data and identifying meaningful metabolic states, the project aims to contribute to the development of strategies for improved bioprocess performance and efficiency.

3 Literature Review

3.1 Overview of Relevant Literature

3.1.1 Auto-encoders Based Dimensionality Reduction

The paper [**wang2016autoencoder**] explores the dimensionality reduction ability of auto-encoder, a three-layered neural network commonly used in deep learning. The authors aim to understand the unique properties of auto-encoder compared to state-of-the-art dimensionality reduction methods and its potential contribution to the success of deep learning.

The study involves experiments conducted on both synthesized and real datasets, including two and three-dimensional spaces for better visualization, as well as the MNIST and Olivetti face datasets. The results demonstrate that auto-encoder can indeed learn distinct representations compared to other methods. It exhibits the capability to capture complex structures, adaptively extract features, compress data, and provide accurate reconstructions. The experiments also investigate the influence of the number of hidden layer nodes on the performance of auto-encoder, revealing a possible relationship between the number of nodes and the intrinsic dimensionality of the input data.

Overall, the findings highlight the effectiveness of auto-encoder in dimensionality reduction and its potential as a building block in deep learning architectures. The unique properties of auto-encoder, such as its ability to detect repetitive structures, make it a valuable tool for various applications. Moreover, the study suggests that choosing the appropriate number of hidden layer nodes can enhance the performance of auto-encoder in reducing dimensionality.

3.1.2 A Folded Neural Network Autoencoder for Dimensionality Reduction

The paper [**wang2012folded**] introduces a new structure called the folded autoencoder for dimensionality reduction. It addresses the challenge of handling high-dimensional data by reducing computational costs while improving performance. The folded autoencoder is designed based on the symmetric property of the conventional autoencoder, reducing the number of weights that need to be tuned. The authors demonstrate the effectiveness of the folded autoencoder by comparing it with the conventional autoencoder and principal component analysis (PCA) on the MNIST dataset. The results show that the folded autoencoder outperforms PCA and achieves similar performance to the conventional autoencoder in reconstructing images. Furthermore, the training time of the folded autoencoder is reduced by 17.2% compared to the unfolded autoencoder. The study opens up possibilities for real-time applications of autoencoder-based dimensionality reduction.

In conclusion, the proposed folded autoencoder structure offers a promising approach to dimensionality reduction. It not only reduces computational costs but also improves the generalization performance compared to conventional approaches such as PCA. The results obtained on the MNIST dataset demonstrate the effectiveness of the folded autoencoder in reconstructing images. Further research directions include theoretical analysis of the framework, evaluation on larger and more complex datasets, and integration with other advanced techniques such as convolutional networks and incremental learning. The folded autoencoder presents a significant contribution to the field of dimensionality reduction and holds potential for various applications in handling high-dimensional data.

3.1.3 An Autoencoder-based Deep Learning Approach for Clustering Time Series Data

The paper [**tavakoli2020autoencoder**] introduces a two-stage approach for time series clustering to address the challenges posed by high dimensionality, hidden features, and unlabeled data. It emphasizes the importance of understanding dataset characteristics before conducting data analysis. The proposed methodology transforms the unsupervised clustering problem into a supervised learning one by creating cluster labels based on time series data characteristics. In the first stage, a conventional K-means

algorithm is applied to the feature vector data. The second stage utilizes an autoencoder-based deep learning algorithm to capture hidden features and reduce dimensionality. A case study on clustering time series data of over 70 stock indices demonstrates the methodology's effectiveness, achieving an accuracy of 87.5% in predicting cluster labels. The paper also compares the results obtained by the proposed approach and conventional K-means, highlighting that the deep learning-based model considers additional hidden features. The paper is structured with sections discussing key characteristics of time series data, an overview of artificial neural networks, the two-stage model, the encoder-decoder deep learning model, algorithms, evaluation, and future research directions.

In conclusion, this paper presents a novel approach to time series clustering that combines conventional clustering with deep learning techniques. By leveraging the power of deep neural networks, the methodology offers better performance and the ability to identify hidden patterns in the data. The case study on financial time series demonstrates the potential of the proposed approach in improving clustering accuracy and discovering latent features that may influence the clustering results. Future research can further explore the application of other deep learning techniques, such as LSTM and GANs, for various time series analysis tasks, including anomaly detection, seasonal effects, and prediction, to gain a deeper understanding of the advantages and limitations of deep learning in time series data analysis. Additionally, comparative studies between conventional methods and deep learning-based models in different application domains will provide valuable insights into the effectiveness of these approaches in specific scenarios.

3.2 Key Studies and Findings

1. **Auto-encoders Based Dimensionality Reduction** [**wang2016autoencoder**]:
   - Autoencoders learn distinct representations, capturing complex structures and compressing data effectively
   - The number of hidden layer nodes affects performance, indicating a relationship with intrinsic data dimensionality
   - Autoencoders show promise as building blocks in deep learning architectures
2. **A Folded Neural Network Autoencoder** [**wang2012folded**]:
   - The folded autoencoder reduces computational costs while outperforming PCA and matching conventional autoencoders
   - It holds potential for high-dimensional data handling and improves dimensionality reduction
3. **Autoencoder-based Deep Learning for Time Series Clustering** [**tavakoli2020autoencoder**]:
   - A two-stage approach combining K-means and autoencoders achieves high clustering accuracy for time series data
   - Deep learning models capture hidden features, enhancing clustering performance

In conclusion, autoencoders are valuable for dimensionality reduction in large datasets. The folded autoencoder offers an efficient alternative, while deep learning approaches improve clustering accuracy in time series data analysis. These innovative strategies hold promise for various applications and further research.

3.3 Previous Work on Metabolic Analysis

In a previous study related to metabolic analysis, several key steps and methodologies have been employed to preprocess data, group metabolic reactions, and extract meaningful insights. The following summarizes the approach taken in this domain:

3.3.1 Data Preprocessing

Data preprocessing is a critical step in preparing the raw data for analysis. In the context of metabolic analysis, preprocessing involves selecting a subset of equidistant time points, removing reactions with constant values, eliminating transport and exchange reactions, and discarding redundant reactions that represent similar metabolic processes. These steps collectively streamline the dataset and retain relevant temporal dynamics.

In addition to preprocessing, other significant phases of metabolic analysis include:

3.3.2 Clustering

Grouping metabolic reactions based on their flux values over time and samples is a common approach to identify patterns and trends within the data. This process often involves employing unsupervised machine learning techniques, such as clustering algorithms. The primary goal of clustering is to partition reactions into distinct groups based on their similar temporal behaviors. The optimal number of clusters is determined through predefined criteria or methods such as the elbow method or silhouette score.

3.3.3 Random Forest Classifier

Building upon the clustered flux-states, a Random Forest classifier is commonly utilized to predict flux-state labels based on reactions. The Random Forest classifier employs ensemble learning, combining predictions from multiple decision trees to make accurate predictions about the metabolic state of the system. The classifier's strength lies in its ability to handle complex interactions between reactions and effectively classify distinct flux-states.

3.3.4 Feature Importance

To understand the significance of individual reactions in accurately predicting flux-states, the Mean Decrease in Accuracy (MDA) metric is commonly used. This metric quantifies the importance of reactions by measuring their impact on differentiating flux-states. Reactions with higher MDA values are considered to have a significant impact on distinguishing different flux-states within the metabolic network.

In conclusion, previous work in metabolic analysis has demonstrated a structured approach involving data preprocessing, clustering, Random Forest classification, and feature importance assessment.

4 Methodology

4.1 Starting Point: From Lifeline to Internal Cell Data

In this section, we describe the starting point of our analysis, where we transform the approximately 150000 lifeline of cells inside the reactor into internal cell data suitable for further analysis. The process involves several key steps and data transformations to obtain valuable time series data representing the behavior of cells.

The data includes time series readings of substrate concentration seen by the cell at each time point, computation of substrate uptake rate (qS) at each time point (350 s with steps of 0.1 s), metabolic analysis using dynamic Flux Balance Analysis (dFBA), and the generation of a pd.df with the internal fluxes of the cell at each time point. Fluxes are for basic E.Coli and approximately 100 reactions.

4.2 Objective 1: Data Analysis of the Internal Cell Data

Background: Autoencoders

Autoencoders play a crucial role in this project, as they are neural network models designed for unsupervised learning and dimensionality reduction. They consist of two main components: an encoder and a decoder. Working together, the encoder compresses the input data into a latent space, while the decoder reconstructs it. By minimizing the reconstruction error between the original and reconstructed data, autoencoders capture salient features and extract meaningful representations. The compressed latent space obtained from the autoencoder can be used for subsequent analysis and interpretation. By leveraging the reduced-dimensional representation, it becomes easier to explore patterns, extract meaningful features, and perform various analysis techniques. The dimensionality reduction aspect of autoencoders helps to focus on the essential characteristics of the data, making it more amenable for further analysis tasks such as clustering, visualization, or supervised learning. Objectives 4.2.1 and 4.2.2 focus on building an autoencoder model where as subsequent objecives focus on analysis and use for latent space from the autoencoder models for further processing.

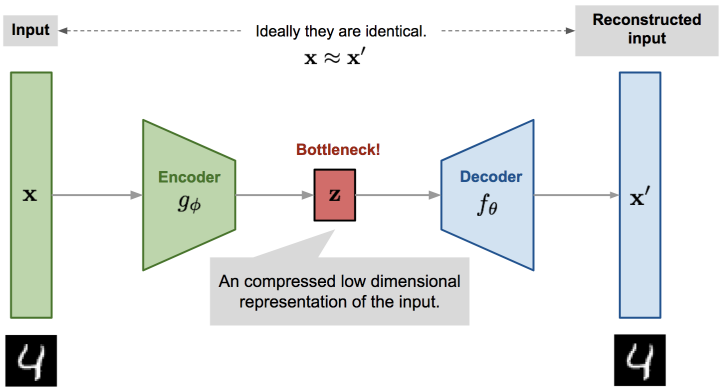

Figure 1: Basic Autoencoder Architecture

Autoencoder for 3-Dimensional Input: Cell Lifeline, Timepoints, and Reaction Fluxes

In this section, we describe the specifics of utilizing an autoencoder for processing 3-dimensional input data, where each dimension represents critical information about the cell behavior within the bioreactor. The input consists of three dimensions:

1. **Cell Lifeline:** This dimension represents the lifeline of a single cell within the bioreactor, capturing the sequential movement and behavior of the cell over time.
2. **Timepoints:** The timepoints dimension corresponds to the time series data, providing a series of observations recorded at regular intervals (e.g., 0.1 seconds) over a specific duration (e.g., 100 seconds).
3. **Reaction Fluxes:** This dimension contains the internal fluxes of the cell at each timepoint, representing the metabolic activity and reactions occurring inside the cell as it interacts with the environment. Note, the biomass reaction fluxes is the variable to be observed during validation.

The goal of the autoencoder is to reduce the dimensionality of this 3D input data while preserving meaningful patterns and characteristics. By doing so, the autoencoder captures the salient features and essential temporal dynamics of the cell behavior, facilitating subsequent analysis and interpretation.

The provided architecture showcases an example of constructing and training an autoencoder using Keras.

The model architecture consists of an encoder and a decoder, connected through a latent space. The encoder processes the 3D input data, compressing it into a lower-dimensional latent space. The decoder then reconstructs the original data from this latent representation.

The architecture includes the following layers:

1. **Input Layer:** The input layer is defined to accept the 3D input data.
2. **Reshape Layer:** Since the autoencoder operates on flattened data, the reshape layer converts the 3D input into a 2D format.
3. **Encoder Layers:** The encoder is composed of dense layers with a variable number of hidden units and activation functions. The number of hidden units and the activation function are hyperparameters that can be optimized using techniques like Optuna.
4. **Latent Space:** The output of the encoder is the latent space, which is a reduced-dimensional representation of the original data.
5. **Decoder Layers:** The decoder part of the autoencoder mirrors the encoder's architecture. It reconstructs the original data from the latent space.
6. **Output Layer:** The output layer of the autoencoder restores the 3D format of the data through reshaping.

The model is then trained on the input data using the mean squared error (MSE) loss function and the Adam optimizer. The latent space representation obtained from the trained autoencoder can be used for various purposes, such as clustering similar lifelines or visualizing the cell behavior in a lower-dimensional space.

4.2.1 Identifying relevant information to extract from the internal cell data

Input data from the domain can then be provided to the autoencoder model, and the output of the model at the bottleneck, which represents the compressed latent space, can be used as a feature vector. This feature vector can be utilized in various ways, such as feeding it into a supervised learning model for classification or regression tasks, enabling visualization of the data in a lower-dimensional space, or more generally, facilitating dimensionality reduction. By leveraging the capabilities of autoencoders, particularly LSTM autoencoders in this project, the goal is to extract the most informative and relevant features that capture the essential characteristics of the internal cell data. This process effectively reduces the complexity of the data while preserving its temporal nature, enabling further analysis and interpretation of the cell behavior within the bioreactor.

4.2.2 Exploring the possibility of dataset reduction

This objective involves using autoencoders, particularly undercomplete ones, to reduce the complexity of internal cell data while maintaining its time-based qualities. Autoencoders are specialized neural networks designed for unsupervised learning and dimension reduction. Essentially, they transform input data into a lower-dimensional "latent space" using an encoder, then decode it back to its original form using a decoder. The main aim is not perfect copying, but rather capturing the most important features and meaningful representations.

Conventional techniques like Principal Component Analysis (PCA) fall short when applied to time-based data due to its sequential nature. These methods struggle to catch detailed time patterns and the complex relationships between reactions, leading to vital information loss. In contrast, autoencoders excel at capturing time dynamics and crucial features. This is especially useful for analyzing time series and selecting relevant features, overcoming the limitations of methods like PCA.

In the realm of time-based data, the significance of Long Short-Term Memory (LSTM) autoencoders becomes evident. These specialized variations of autoencoders incorporate LSTM layers, known for their skill in capturing long-term connections and temporal relationships in sequential data. In this project, LSTM autoencoders skillfully reduce the number of reaction fluxes while preserving key temporal dynamics. Employing LSTM autoencoders enables data dimensionality reduction, simplifying the analysis of cellular behavior in the bioreactor setting.

The primary objective is to use LSTM autoencoders to reduce the number of reaction fluxes in the internal cell data. In doing so, the project aims to extract the most important and relevant features, making data more manageable while keeping its temporal essence. This dimensionality reduction streamlines subsequent analysis and helps interpret cell behavior in the bioreactor.

Moreover, it's worth noting that when the decoder uses linear transformations and the loss function is based on mean squared error, an undercomplete autoencoder can essentially capture a similar subspace as PCA. In simpler terms, if an autoencoder is trained to copy input, it can also grasp the main characteristics of the data in the process.

Expanding this concept to include autoencoders with nonlinear encoder functions and decoder functions leads to a more powerful, nonlinear version of PCA. Essentially, these autoencoders can capture intricate patterns and relationships within the data. However, it's important to be careful when designing the encoder and decoder capabilities. Giving them too much ability might result in the autoencoder focusing solely on copying input, rather than extracting valuable insights from the data. [Goodfellow]

4.2.3 Analyzing similarities and trends within a single cell lifeline (e.g., cycles inside the reactor)

One of the objectives of this project is to analyze the similarities and trends within a single cell lifeline, such as the cycles inside the reactor. To achieve this, the latent space or low-dimensional representation obtained from the autoencoder can be leveraged. Several methods (both traditional methods and ML methods) using the latent space representation are detailed below. Notably, the first method tried will be that detailed in section 3.3 related to previous works (Clustering and Classification) which is detailed briefly below in traditional machine learning techniques below.

Time Series Analysis:

1. Autocorrelation Analysis:
    - Measure autocorrelation between a time series and its lagged versions to reveal repeating patterns and cycles.
2. Fourier Transform:
    - Decompose the time series into its constituent frequencies, helpful in identifying periodic trends.
3. Dynamic Time Warping (DTW):
    - Measure similarity between two time series with different lengths or temporal distortions, useful for identifying similar cycles within the reactor's lifeline.

To complement traditional methods, machine learning techniques can be applied to the time series analysis. Some relevant approaches include:

1. Time Series Clustering with k-means:
    - Apply k-means clustering to group similar segments of the time series and identify distinct stages or cycles within the cell lifeline without predefined labels.

2. Time Series Classification with Machine Learning Algorithms:
   - Utilize various classification algorithms (e.g., Random Forest, Support Vector Machines) if labeled data is available to identify and classify different stages or cycles in the time series.

4.2.4 Identifying similarities and trends within lifeline groups (e.g., clusters of cells)

Another objective of this project is to identify similarities and trends within lifeline groups, which refer to clusters of cells that exhibit similar behavior. By leveraging the latent space or low-dimensional representation obtained from the autoencoder trained on all lifelines, it becomes possible to analyze and characterize these groups.

Time Series Analysis for Lifeline Groups: To achieve this, various time series analysis methods can be applied to compare and identify similarities and trends within lifeline groups:

1. Dynamic Time Warping (DTW) for Multiple Time Series:
   - DTW can be extended to compare multiple time series simultaneously, measuring the similarity between each time series and a reference series. This approach can reveal common patterns and cycles shared among cells in a lifeline group.
2. Cross-Correlation Analysis:
   - Cross-correlation measures the similarity between two time series as a function of the time lag. By applying cross-correlation to multiple time series within a lifeline group, shared patterns and temporal relationships can be identified.
3. Time Series Alignment and Averaging:
   - Align multiple time series within a lifeline group to a common time frame and compute the average time series. This process can reveal the collective behavior and trends shared by the cells in the group.

Machine Learning Techniques for Lifeline Groups: In addition to the above methods, machine learning techniques can be utilized to identify and explore similarities and trends within lifeline groups:

1. Time Series Clustering with Hierarchical Clustering:
   - Apply hierarchical clustering to group cells based on the similarity of their time series data. This approach can reveal hierarchies of similarities within the lifeline groups.
2. Time Series Classification with LSTM for Lifeline Grouping:
   - Use LSTM networks for time series classification to group cells with similar patterns into lifeline clusters. LSTM can capture long-term dependencies and complex relationships among time series data.

4.2.5 Determining meaningful metabolic states of the cells (e.g., cycles) and the reactions that define metabolic clusters

To identify meaningful metabolic states based on the reaction fluxes within the cell lifelines, we can employ clustering techniques tailored for time series data. These methods will group reactions with similar temporal behavior together, revealing distinct metabolic states and characteristic patterns exhibited during different stages of the lifeline.

1. **Density-Based Clustering**: Density-based clustering methods, like DBSCAN, can identify regions of high density in the reaction flux data, representing sets of reactions with similar behaviors that define specific metabolic states.

2. **Agglomerative Hierarchical Clustering**: Hierarchical clustering can be applied to group reactions based on similarity in their temporal behavior. This approach constructs a tree-like hierarchy of clusters, which can be cut at different levels to identify different metabolic states.
3. **Partitioning Around Medoids (PAM)**: PAM is a variation of K-Medoids clustering that can handle time series data by using medoids (representative time series) to cluster reactions based on similarity in temporal profiles.
4. **Time Series Shapelets**: Time series shapelets are small, informative subsequences that can be used for clustering time series data. By identifying shapelets in the reaction flux time series, we can cluster reactions based on their shape similarities.

By applying these time series clustering techniques to the reaction flux data, we can identify meaningful metabolic states by grouping together reactions with similar temporal patterns. The identified clusters of reactions will provide insights into the dynamic behavior of the cellular metabolic network, aiding in the optimization and control of bioprocesses in industrial settings.

4.2.6 Exploring Innovative Ways to Represent the Data

Visualization with t-SNE
t-SNE (t-Distributed Stochastic Neighbor Embedding) is an algorithm widely used for visualizing high-dimensional data in a lower-dimensional space, typically 2D or 3D. In the context of this project, t-SNE can be applied to visualize the latent space obtained from the autoencoder, providing valuable insights into the underlying structure and relationships of the internal cell data.

The visualization process involves the following steps:

1. **Projection to Latent Space:** The encoder layers of the autoencoder are used to project a given input into the latent space. This step yields a set of latent vectors representing the essential characteristics of the internal cell data.
2. **t-SNE Embedding:** The obtained latent vectors are then embedded into a two-dimensional space using t-SNE. The algorithm aims to preserve the pairwise distances between the data points, allowing the data to be visualized in a lower-dimensional space while retaining meaningful relationships and patterns.
3. **Visualization of Latent Space:**

   The t-SNE visualization of the latent space reveals how similar and dissimilar objects are distributed in this reduced space. In this context, objects correspond to different cellular states or metabolic patterns within the bioreactor. Similar metabolic states, such as cycles or distinct cellular behaviors, form clusters, while dissimilar states are located farther apart in the latent space.

Learning Manifolds with Autoencoders

Autoencoders capitalize on the tendency of data to form clusters around low-dimensional manifolds. Unlike conventional manifold learning approaches, autoencoders actively uncover and model these manifold structures.

Manifolds are defined by their tangent planes, which represent the local directions of variability. Autoencoders achieve this by striking a balance between representing the data for accurate reconstruction and adhering to constraints or regularization.

Autoencoders proficiently capture the variations inherent in the manifold, which are crucial for successful reconstruction. When data clusters on a manifold, autoencoders implicitly learn a local coordinate system. Encoders map inputs to representations that are sensitive to manifold directions while disregarding shifts orthogonal to the manifold.

Compared to alternative methods, autoencoders excel at capturing and representing manifold structures. Their harmonious integration of reconstruction and constraint forces yields informative representations that effectively encapsulate the underlying data distribution.

4.3 Objective 2: Try More Complex Metabolic Models (Second Phase)

4.4 Innovative Ideas Strategies

To address the challenge of memory constraints and efficiently process an extensive dataset containing 150k lifelines within the autoencoder framework, several strategies and innovative ideas can be explored. These strategies aim to enhance the training process, minimize memory usage, and ensure effective handling of the large-scale dataset. Here are some potential approaches:

1. **Folded Autoencoder Structure:** Drawing inspiration from the folded autoencoder structure proposed in [**wang2012folded**], it's worth investigating the applicability of a folded autoencoder for dimensionality reduction. The folded autoencoder leverages the symmetric property of the conventional autoencoder to reduce the number of weights, leading to improved performance and reduced computational costs.
2. **Regularized Autoencoders:** In addition to the strategies mentioned earlier, considering regularized autoencoders can significantly enhance the autoencoder's capabilities. Regularized autoencoders are discussed below.
3. **Deep Autoencoders:** Exploring the potential of using deep encoders and decoders can offer substantial benefits. Deep autoencoders, which involve multiple hidden layers, provide enhanced representational power. This concept is discussed in more detail below.

4.4.1 Enhanced Autoencoders with Regularization

Regularized autoencoders offer a robust solution to tackle challenges related to autoencoder capacity and redundancy. Traditional undercomplete autoencoders, characterized by a code dimension smaller than the input dimension, can indeed capture fundamental aspects of data distribution. However, their effectiveness diminishes when encoder and decoder capacities become excessive, hindering their ability to extract meaningful insights. A similar issue arises when the code dimension aligns or exceeds the input dimension, resulting in suboptimal performance.

To address these concerns, regularized autoencoders introduce a fresh perspective. Rather than relying solely on strategies such as shallow encoders, modest code sizes, or linear transformations to constrain model capacity, regularized autoencoders employ a distinctive loss function. This loss function emphasizes additional desirable traits, including representation sparsity, minimized representation derivative, and resilience against noise or incomplete inputs. Consequently, a regularized autoencoder can achieve nonlinearity and overcompleteness while extracting valuable insights from data distribution. This ability persists even in scenarios where model capacity could trivially mimic input replication. [Goodfellow]

4.4.2 Harnessing Depth in Autoencoders

While autoencoders often feature single-layer encoders and decoders, embracing deep architectures offers notable advantages. The benefits of depth, widely recognized in the context of feedforward networks naturally extend to autoencoders due to their shared feedforward nature.

One significant advantage of introducing substantial depth pertains to the universal approximator theorem. This theorem asserts that a feedforward neural network with at least one hidden layer can closely approximate any function (within a broad class), given a sufficient number of hidden units. A single hidden layer autoencoder can indeed represent the identity function reasonably well across the data domain. However, it lacks the capability to enforce intricate constraints, such as sparsity. In contrast, a

deep autoencoder, enriched with additional hidden layers within the encoder, excels at approximating mappings from input to code. This is achieved to a high degree of accuracy, provided an ample number of hidden units are available.

Deep autoencoders bring about exponential reductions in the computational resources required for representing specific functions, while also substantially diminishing the training data needed. Empirical observations attest that deep autoencoders outperform their shallow or linear counterparts in compression capabilities. A common training methodology for deep autoencoders involves initial greedy pretraining using a series of shallow autoencoders. This practice remains relevant even when the ultimate goal is to develop a deep autoencoder.[Goodfellow]

5 Conclusion

The central objectives of our analysis have revolved around understanding the behavior of cells within the bioreactor and identifying meaningful patterns and trends within their lifelines. To achieve this, we have employed autoencoders, leveraging their ability to capture essential temporal dynamics and extract informative latent representations.

The process begins with transforming the lifelines of cells inside the reactor into internal cell data suitable for analysis. This involves generating time series data of substrate concentrations, computing substrate uptake rates, conducting metabolic analysis using dynamic Flux Balance Analysis (dFBA), and capturing internal fluxes of the cell over time.

Our main focus has been on Objective 1, which involves data analysis of the internal cell data using autoencoders. We have described the architecture of autoencoders, including their encoder and decoder components, and their ability to reduce the dimensionality of 3-dimensional input data representing cell lifelines, timepoints, and reaction fluxes.

In addition to the core methodology, we have explored innovative strategies to tackle challenges such as memory constraints and the handling of large-scale datasets. Strategies like folded autoencoder structures, deep autoencoders, and regularized autoencoders have been proposed to optimize training efficiency and memory usage.

In conclusion, our methodology encompasses the application of autoencoders and innovative techniques to comprehensively analyze and interpret internal cell data. The combination of autoencoders' dimensionality reduction capabilities and strategic approaches to handling data challenges equips us to uncover valuable insights, patterns, and trends within the complex temporal behavior of cells.

6 References

6.1 Comprehensive List of Cited Literature and References

Sairam Sundaresan, Ayush Thakur. "An Introduction to Adversarial Latent Autoencoders." An Introduction to Adversarial Latent Autoencoders, 22 Nov. 2022, wandb.ai/authors/alae/reports/An-Introduction-to-Adversarial-Latent-Autoencoders–VmlldzoxNDA2MDY.

Tavakoli, Neda, et al. "An Autoencoder-Based Deep Learning Approach for Clustering Time Series Data." SN Applied Sciences, vol. 2, no. 5, 2020, https://doi.org/10.1007/s42452-020-2584-8.

Wang, Jing, et al. "A Folded Neural Network Autoencoder for Dimensionality Reduction." Procedia Computer Science, vol. 13, 2012, pp. 120–127, https://doi.org/10.1016/j.procs.2012.09.120.

Wang, Yasi, et al. "Auto-Encoder Based Dimensionality Reduction." Neurocomputing, vol. 184, 2016, pp. 232–242, https://doi.org/10.1016/j.neucom.2015.08.104.

Ian Goodfellow and Yoshua Bengio and Aaron Courville, “Deep Learning”

https://hackernoon.com/latent-space-visualization-deep-learning-bits-2-bd09a46920df

https://arxiv.org/abs/1809.00999 sources