

# Data Network Dashboards

This document is currently under construction

2020-11-07



# Contents

<b>Preface</b>	<b>5</b>
Contributors . . . . .	5
Considerations . . . . .	6
License . . . . .	6
Acknowledges . . . . .	6
<b>1 Introduction</b>	<b>7</b>
1.1 Data Network Dashboard . . . . .	7
<b>2 Installation</b>	<b>9</b>
2.1 First Steps . . . . .	9
2.2 Dashboard Viewer setup . . . . .	9
2.3 Insert Concepts . . . . .	10
2.4 Superset setup . . . . .	11
2.5 Dummy data . . . . .	11
<b>3 General</b>	<b>13</b>
3.1 CSS . . . . .	13
3.2 Database Type and Country Filter . . . . .	13
3.3 Total Number of Patients . . . . .	14
3.4 Network Growth by Date . . . . .	16
3.5 Patients per Country . . . . .	17
3.6 Database Types per Country . . . . .	18
3.7 World Map . . . . .	19
3.8 Meta Data . . . . .	21
<b>4 Person</b>	<b>23</b>
4.1 Label Colors . . . . .	23
4.2 CSS . . . . .	23
4.3 Data Source Filter . . . . .	23
4.4 Age at first observation - Table . . . . .	24
4.5 Age at first observation - Bars . . . . .	26
4.6 Year of Birth . . . . .	27

4.7	Gender . . . . .	28
<b>5</b>	<b>Observation Period</b>	<b>31</b>
5.1	CSS . . . . .	31
5.2	Data Source Filter . . . . .	31
5.3	Number of Patients in Observation Period . . . . .	32
5.4	Observation Period Start Dates . . . . .	33
5.5	Observation Period End Dates . . . . .	35
<b>6</b>	<b>Visit</b>	<b>37</b>
6.1	CSS . . . . .	37
6.2	Data Source Filter . . . . .	37
6.3	Visit Type Table . . . . .	38
6.4	Visit Types Bars . . . . .	39
<b>7</b>	<b>Death</b>	<b>43</b>
7.1	CSS . . . . .	43
7.2	Data Source Filter . . . . .	43
7.3	Number of Records . . . . .	44
7.4	Death By Year per Thousand People . . . . .	45
<b>8</b>	<b>Concepts Browser</b>	<b>47</b>
8.1	CSS . . . . .	47
8.2	Data Source and Domain Filters . . . . .	47
8.3	Number of Concepts . . . . .	48
8.4	Concept Browser Table . . . . .	49
<b>9</b>	<b>Provenance</b>	<b>53</b>
9.1	CSS . . . . .	53
9.2	Data Source Filter . . . . .	53
9.3	Condition & Drug & Procedure & Device & Measurement & Observation Types . . . . .	54
<b>10</b>	<b>Data Domains</b>	<b>57</b>
10.1	CSS . . . . .	57
10.2	Data Source Filter . . . . .	57
10.3	Average Number of Records per Person . . . . .	58
<b>11</b>	<b>Per Database</b>	<b>61</b>
11.1	Label Colors . . . . .	61
11.2	CSS . . . . .	61
11.3	Data Source Filter . . . . .	61
<b>12</b>	<b>Data Domains</b>	<b>71</b>
12.1	CSS . . . . .	71
12.2	Data Source Filter . . . . .	71
12.3	Average Number of Records per Person . . . . .	72

# Preface

Automated Characterization of Health Information at Large-scale Longitudinal Evidence Systems (ACHILLES) is a profiling tool developed by the OHDSI community to provide descriptive statistics of databases standardized to the OMOP Common Data Model. These characteristics are presented graphically in the ATLAS tool. However, this solution does not allow for database comparison across the data network. The Data Network Dashboards aggregates ACHILLES results files from databases in the network and displays the descriptive statistics through graphical dashboards. This tool is helpful to gain insight in the growth of the data network and is useful for the selection of databases for specific research questions. In the software demonstration we show a first version of this tool that will be further developed in EHDEN in close collaboration with all our stakeholders, including OHDSI.

## Contributors

To develop this tool, EHDEN organized a hack-a-thon (Aveiro, December 2-3, 2019), where we defined and implemented a series of charts and dashboards containing the most relevant information about the OMOP CDM databases. The team involved in this task were composed by the following members:

- João Rafael Almeida<sup>1</sup>
- André Pedrosa<sup>1</sup>
- Peter R. Rijnbeek<sup>2</sup>
- Marcel de Wilde<sup>2</sup>
- Michel Van Speybroeck<sup>3</sup>
- Maxim Moinat<sup>4</sup>
- Pedro Freire<sup>1</sup>
- Alina Trifan<sup>1</sup>
- Sérgio Matos<sup>1</sup>
- José Luís Oliveira<sup>1</sup>

1 - Institute of Electronics and Informatics Engineering of Aveiro, Department of Electronics and Telecommunication, University of Aveiro, Aveiro, Portugal

2 - Erasmus MC, Rotterdam, Netherlands

3 - Janssen Pharmaceutica NV, Beerse, Belgium

4 - The Hyve, Utrecht, Netherlands

## Considerations

This manual was written to be a guide for a clean installation of this system with all the dashboards that we defined during the project. The first chapter describes the goal of the system and the second how to install the system. The remaining chapters are dedicated to the dashboards, in which chapters describes one dashboard and all its charts. To simplify the representation of the dashboard's layout, we used similar schemas as it is presented in Figure 1. The white box is the dashboard and the inside boxes are charts. The colour changes in relation to the type of chart.




Figure 1: Example of a dashboards tool presenting the databases available in the network (simulated data)

## License

The system is open-source and this manual was written in RMarkdown using the bookdown package.

## Acknowledges

This work has been conducted in the context of EHDEN, a project that receives funding from the European Union's Horizon 2020 and EFPIA through IMI2 Joint Undertaking initiative, under grant agreement No 806968.

# Chapter 1

## Introduction

The OHDSI research network has been growing steadily which results in an increasing number of healthcare databases standardized to the OMOP CDM format. The OHDSI community created the ACHILLES tool (Automated Characterization of Health Information at Large-scale Longitudinal Exploration System) to characterize those databases. The results are available to the data custodian in their local ATLAS tool and helps them to gain insights in their data and helps in assessing the feasibility of a particular research questions.

ACHILLES was designed to extract the metadata from a single database, which by itself does not allow the comparison with the remaining databases in the network. However, we believe there is even more value in sharing this information with others to enable network research in a Data Network Dashboard.

### 1.1 Data Network Dashboard

The European Health Data and Evidence Network (EHDEN) project therefore designed a Data Network Dashboard tool, a web application to aggregate information from distributed OMOP CDM databases. It uses the ACHILLES results files to construct graphical dashboards and enables database comparison (Figure 1.1). The tool is built on Apache Superset, which is an open-source enterprise-ready business intelligence web application that can provide powerful and fully customizable graphical representations of data. Achilles results can be uploaded through the EHDEN Database Catalogue using the dashboards plugin but can also be directly uploaded in the tool. Figure 1. Example of a dashboards tool presenting age and gender distributions (simulated data).

In this tools, we defined and implemented a series of charts and dashboards containing the most relevant information about the databases, such as:

- **General:** dashboards that shows the databases types per country, the

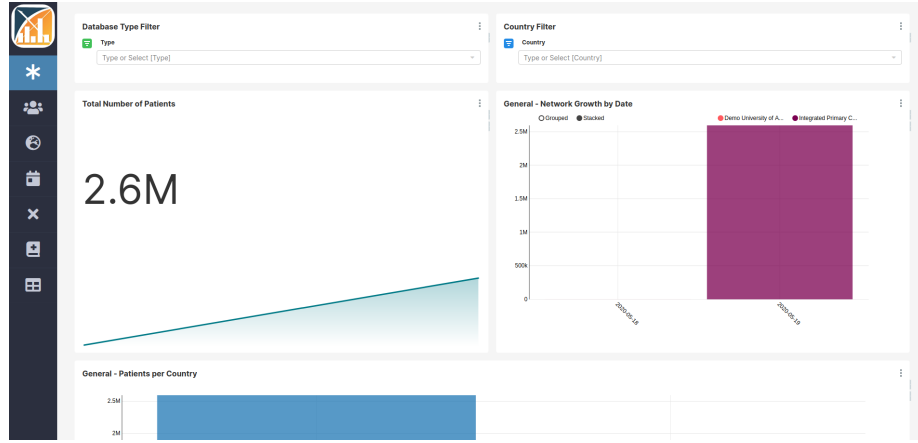


Figure 1.1: Example of a dashboards tool presenting the databases available in the network (simulated data)

distribution of data source types, the growth of the Network including the number of database and the number of patients in the databases over time;

- **Person:** representing the number of patients per country, age distribution at first observation, year of birth distribution and normalized gender distribution;
- **Population characteristics:** dashboard with the cumulative patient time, persons with continuous observation per month, and the start and end dates of those periods;
- **Visit:** chart to compare the number and type of visit occurrence records;
- **Death:** information about the number of death records by month, and the patient age at time of death;
- **Concepts:** bubble chart which shows the number of patients and records per concept over the databases;
- **Data domains:** heat map visualization of the major data domains in each database.



## Chapter 2

# Installation

Currently, we use docker to deploy our environment

### 2.1 First Steps

1. Clone the repository with the command `git clone --recurse-submodules https://github.com/EHDEN/NetworkDashboards`. If you already cloned the repository without the `--recurse-submodules` option, run `git submodule update --init` to fetch the superset submodule.
2. Create a `.env` file on the `docker` directory, using `.env-example` as a reference, setting all necessary environment variables (`SUPERSET\_MAPBOX\_API\_KEY` and `DASHBOARD\_VIEWER\_SECRET\_KEY`).

### 2.2 Dashboard Viewer setup

1. If you wish to expose the dashboard viewer app through a specific domain(s) you must add it/them to the `ALLOWED_HOSTS` list on file `dashboard_viewer/dashboard_viewer/settings.py` and remove the `'*'` entry.
2. Build containers' images: `docker-compose build`. This might take several minutes.
3. Set up the database and create an admin account for the dashboard viewer app: `docker-compose run --rm dashboard ./docker-init.sh`.

## 2.3 Insert Concepts

The concepts table is not in the repository due to its dimension, therefore we use directly the Postgres console to insert this table in the installation.

1. Get your concept csv file from Athena
2. Copy the file into postgres container

```
docker cp concept.csv dashboard_viewer_postgres_1:/tmp/
```

3. Enter in the postgres container:

```
docker exec -it dashboard_viewer_postgres_1 bash
```

4. Enter in the `achilles` database (value of the variable `POSTGRES_ACHILLES_DB` on the `.env` file) with the `root` user (value of the variable `POSTGRES_ROOT_USER` on the `.env` file):

```
psql achilles root
```

5. Create the concept table

```
CREATE TABLE concept (
  concept_id      INTEGER      NOT NULL,
  concept_name    VARCHAR(255) NOT NULL,
  domain_id      VARCHAR(20)  NOT NULL,
  vocabulary_id   VARCHAR(20) NOT NULL,
  concept_class_id VARCHAR(20) NOT NULL,
  standard_concept VARCHAR(1)  NULL,
  concept_code    VARCHAR(50)  NOT NULL,
  valid_start_date DATE        NOT NULL,
  valid_end_date  DATE        NOT NULL,
  invalid_reason  VARCHAR(1)   NULL
);
```

6. Copy the CSV file content to the table (this could take a while)

To get both ' (single quotes) and " (double quotes) on the `concept_name` column we use a workaround by setting the quote character to one that should never be in the text. Here we used `\b` (backslash).

```
COPY public.concept FROM '/tmp/concept.csv' WITH CSV HEADER
DELIMITER E'\t' QUOTE E'\b';
```

7. Create index in table (this could take a while):

```
CREATE INDEX concept_concept_id_index ON concept (concept_id);
CREATE INDEX concept_concept_name_index ON concept (concept_name);
```

8. Set the owner of the `concept` table to the `achilles` user (value of the variable `POSTGRES_ACHILLES_USER` on the `.env` file):

```
ALTER TABLE concept OWNER TO achiller
```

9. Bring up the containers: `docker-compose up -d`.
10. Run the command `docker-compose run --rm dashboard python manage.py generate_materialized_views` to create the materialized views on Postgres.

## 2.4 Superset setup

1. Make sure that the container `superset-init` has finished before continuing. It is creating the necessary tables on the database and creating permissions and roles.
2. Execute the script `./superset/one_time_run_scripts/superset-init.sh`. This will create an admin account and associate the `achilles` database to Superset. **Attention:** You must be in the `docker` directory to execute this script.
3. We have already built some dashboards so if you want to import them run the script `./superset/one_time_run_scripts/load_dashboards.sh`. **Attention:** You must be in the `docker` directory to execute this script.
4. If you used the default ports:
  - Go to `http://localhost` to access the dashboard viewer app.
  - Go to `http://localhost:8088` to access superset.
5. On release 0.37 of Superset, there is a bug related to the public role and because of that, we had to set `PUBLIC_ROLE_LIKE_GAMMA = True` on Superset settings. This leads the public role with permissions that he shouldn't have. To solve this, so any anonymous user can view dashboards, you should remove all its permissions and then add the following:
  - can explore JSON on Superset
  - can dashboard on Superset
  - all datasource access on `all_datasource_access`
  - can csrf token on Superset
  - can list on `CssTemplateAsyncModelView`

## 2.5 Dummy data

On a fresh installation, there are no `achilles_results` data so Superset's dashboards will display "No results". On the root of this repository, you can find the `demo` directory where we have an `ACHILLES` results file with synthetic data that you can upload to a data source on the uploader app of the dashboard viewer (`localhost/uploader`). If you wish to compare multiple data sources, on the `demo` directory there is also a python script that allows you to generate new

ACHILLES results files, where it generates random count values based on the ranges of values for each set of analysis\_id and stratum present on a base ACHILLES results file. So, from the one ACHILLES results file we provided, you can have multiple data sources with different data.

## Chapter 3

# General

### 3.1 CSS

To hide the dashboard header insert the following css code to the CSS field on the edit page:

```
.dashboard > div:not(.dashboard-content) { /* dashboard header */  
  display: none;  
}
```

### 3.2 Database Type and Country Filter

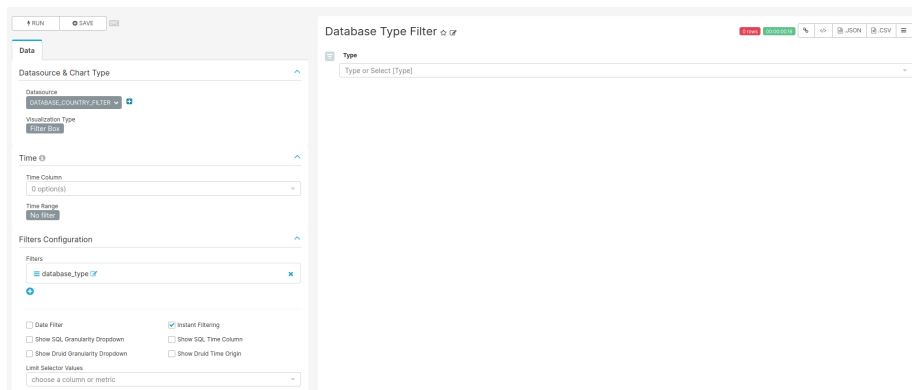


Figure 3.1: Settings for creating filters charts

Theses filter were designed to be used in the dashboard aiming the filtering of the data based on the field “database\_type” and “country” from the table

“data\_source”.

For the filters to work the name of the fields to filter should match in all tables used on the charts of this dashboard.

### 3.2.1 SQL query

```
SELECT source.name,  
       country.country,  
       source.database_type,  
       source.acronym  
FROM public.data_source AS source  
INNER JOIN public.country AS country ON source.country_id=country.id
```

### 3.2.2 Chart settings

- Data Tab
  - Datasource & Chart Type
    - \* Visualization Type: Filter Box
  - Time
    - \* Time range: No filter
  - Filters Configuration
    - \* Filters:
      - database\_type or country
    - \* Date Filter: off
    - \* Instant Filtering: on

## 3.3 Total Number of Patients

### 3.3.1 SQL query

```
SELECT  
  country,  
  database_type,  
  release_date,  
  SUM(count_value) OVER (ORDER BY release_date ASC)  
FROM achilles_results  
JOIN data_source ON data_source_id = data_source.id  
JOIN country ON data_source.country_id = country.id  
WHERE analysis_id = 1
```

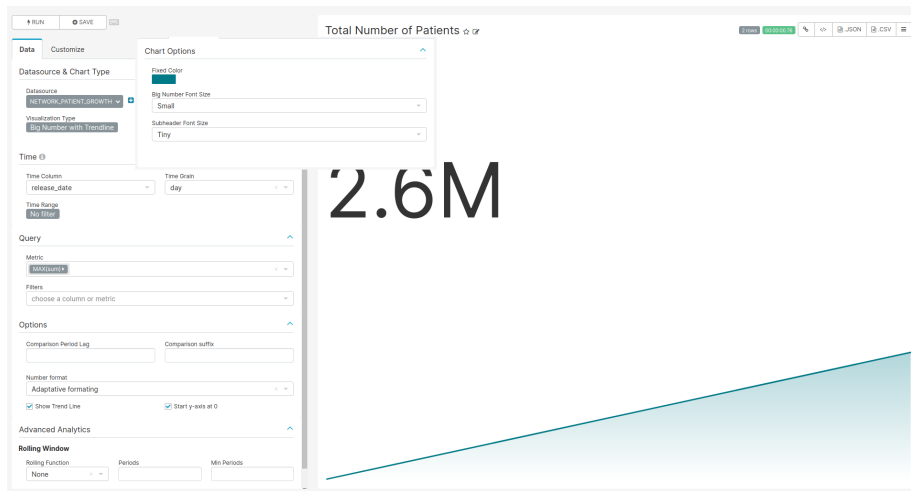


Figure 3.2: Settings for creating the Total Number of Patients chart

### 3.3.2 Chart settings

- Data Tab
  - Datasource & Chart Type
    - \* Visualization Type: Big Number with Trendline
  - Time
    - \* Time range: No filter
  - Query
    - \* Metrics: MAX(sum)
    - \* Series: release\_date
    - \* Breakdowns: source
- Customize Tab
  - Chart Options
    - \* Big Number Font Size: Small
    - \* Subheader Font Size: Tiny

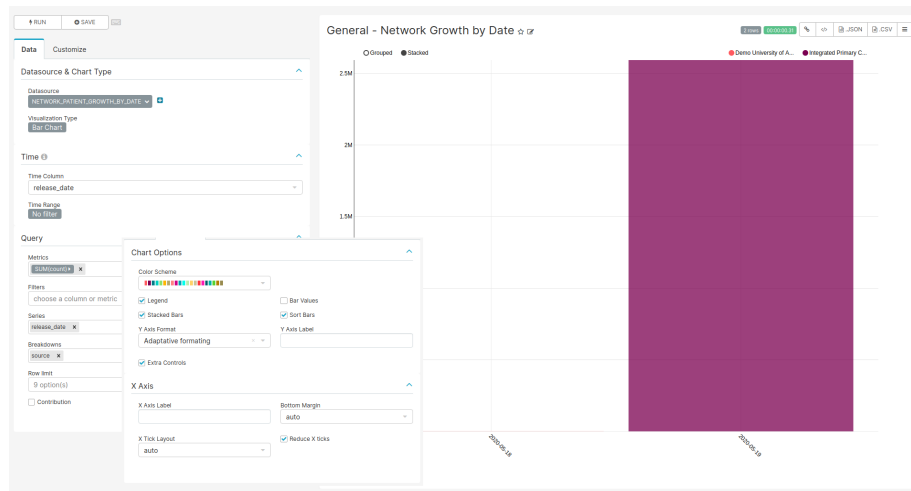


Figure 3.3: Settings for creating the Network Growth by Date chart

## 3.4 Network Growth by Date

### 3.4.1 SQL query

```
SELECT source.name AS source,
       country.country,
       source.database_type,
       source.release_date,
       concepts.concept_name AS gender,
       achilles.count_value as count
FROM public.achilles_results AS achilles
INNER JOIN public.data_source AS source ON achilles.data_source_id=source.id
INNER JOIN public.country AS country ON source.country_id=country.id
JOIN (
  SELECT '8507' AS concept_id, 'Male' AS concept_name
  UNION
  SELECT '8532', 'Female'
) AS concepts ON achilles.stratum_1 = concept_id
WHERE analysis_id = 2
```

### 3.4.2 Chart settings

- Data Tab
  - Datasource & Chart Type
    - \* Visualization Type: Bar Chart



- Time
  - \* Time range: No filter
- Query
  - \* Metrics: SUM(count\_\_value)
  - \* Series: release\_date
  - \* Breakdowns: source
- Customize Tab
  - Chart Options
    - \* Stacked Bars: on
    - \* Sort Bars: on
    - \* Extra Controls: on
  - X Axis
    - \* Reduce X ticks: on

## 3.5 Patients per Country

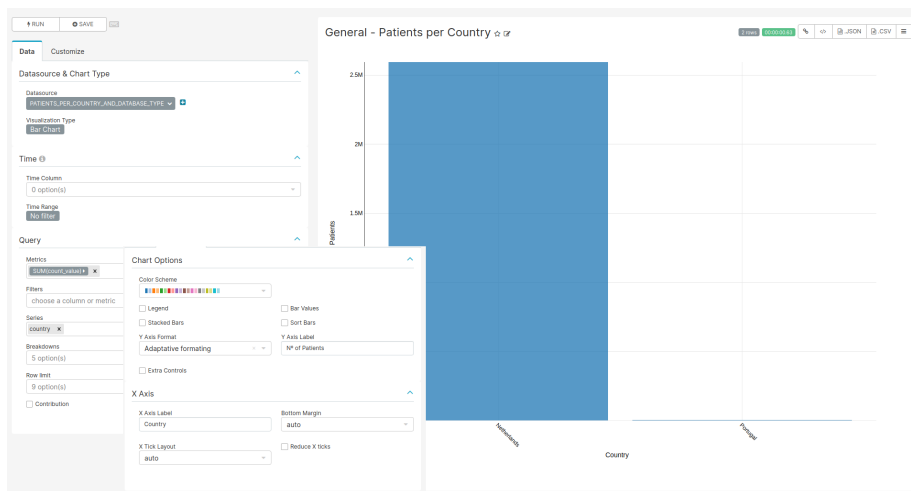


Figure 3.4: Settings for creating the Patients per Country chart

### 3.5.1 SQL query

```
SELECT country.country,  
       source.database_type,  
       count_value  
FROM public.achilles_results AS achilles  
INNER JOIN public.data_source AS source ON achilles.data_source_id=source.id  
INNER JOIN public.country AS country ON source.country_id=country.id  
WHERE analysis_id = 1
```

### 3.5.2 Chart settings

- Data Tab
  - Datasource & Chart Type
    - \* Visualization Type: Bar Chart
  - Time
    - \* Time range: No filter
  - Query
    - \* Metrics: SUM(count\_value)
    - \* Series: country
- Customize Tab
  - Chart Options
    - \* Legend: off
    - \* Y Axis Label: N° of Patients
  - X Axis
    - \* X Axis Label: Country

## 3.6 Database Types per Country

### 3.6.1 SQL query

Same as Patients per Country query

```
SELECT country.country,  
       source.database_type,  
       count_value  
FROM public.achilles_results AS achilles  
INNER JOIN public.data_source AS source ON achilles.data_source_id=source.id  
INNER JOIN public.country AS country ON source.country_id=country.id  
WHERE analysis_id = 1
```

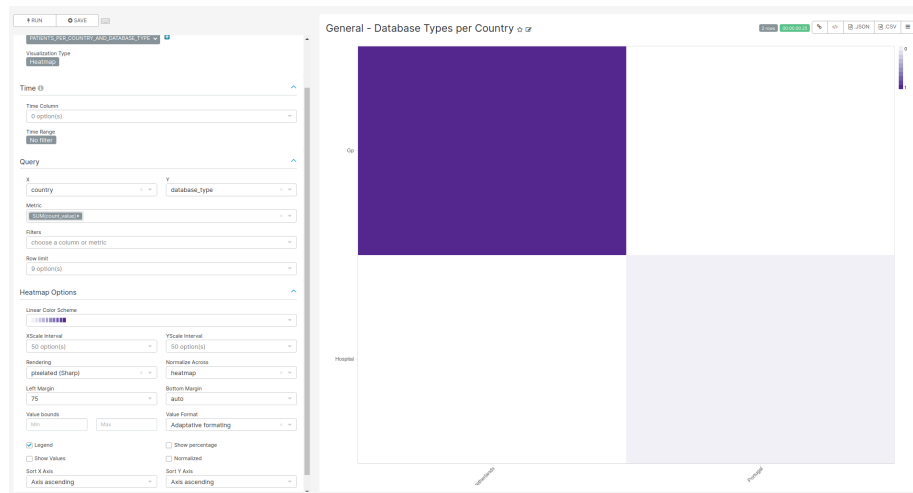


Figure 3.5: Settings for creating the Database Type per Country chart

### 3.6.2 Chart settings

- Data Tab
  - Datasource & Chart Type
    - \* Visualization Type: Heatmap
  - Time
    - \* Time range: No filter
  - Query
    - \* X: country
    - \* Y: database\_type
    - \* Metric: SUM(county\_value)
  - Heatmap Options
    - \* Left Margin: 75
    - \* Show Percentage: off

## 3.7 World Map

### 3.7.1 SQL query

```
SELECT name,
       acronym,
```

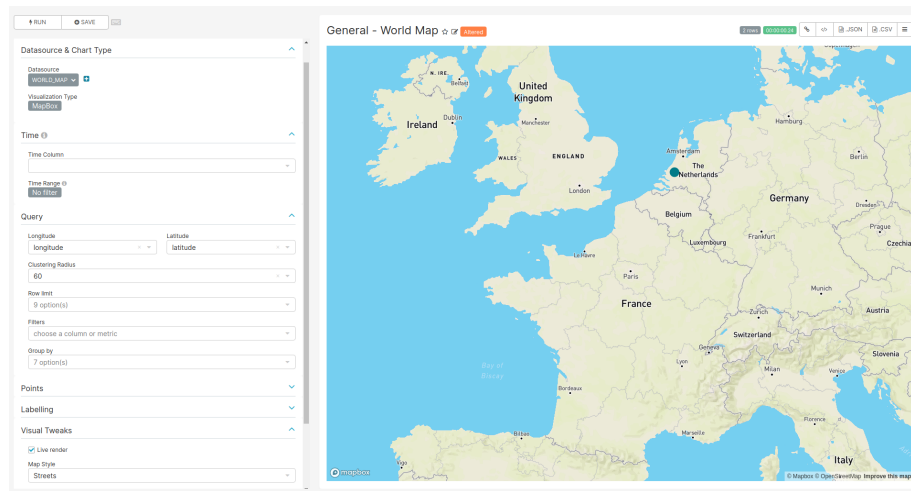


Figure 3.6: Settings for creating the World Map chart

```

database_type,
latitude,
longitude,
country
FROM public.data_source AS source
INNER JOIN public.country AS country ON source.country_id=country.id

```

### 3.7.2 Chart settings

- Data Tab
  - Datasource & Chart Type
    - \* Visualization Type: MapBox
  - Time
    - \* Time range: No filter
  - Query
    - \* Longitude: longitude
    - \* Latitude: latitude
  - Visual Tweaks
    - \* Map Style: Streets or Light or Outdoors

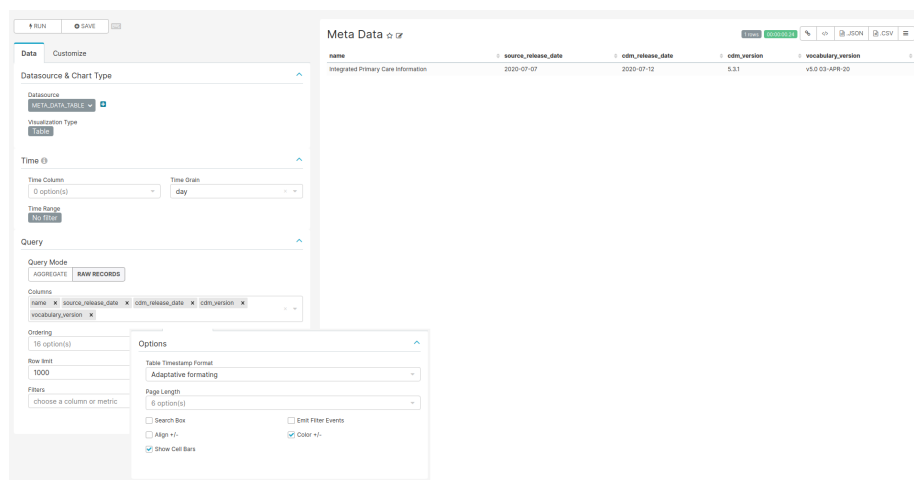


Figure 3.7: Settings for creating the Meta Data chart

## 3.8 Meta Data

### 3.8.1 SQL query

```
SELECT
  acronym,
  stratum_1 as "name",
  database_type,
  country,
  stratum_2 as "source_release_date",
  stratum_3 as "cdm_release_date",
  stratum_4 as "cdm_version",
  stratum_5 as "vocabulary_version"
FROM achilles_results
JOIN data_source ON achilles_results.data_source_id = data_source.id
JOIN country ON data_source.country_id = country.id
WHERE analysis_id=5000
```

### 3.8.2 Chart settings

- Data Tab
  - Datasource & Chart Type
    - \* Visualization Type: Table
  - Time
    - \* Time range: No filter

- Query
  - \* Query Mode: Raw Records
  - \* Columns: name, source\_release\_date, cdm\_release\_date, cdm\_version, vocabulary\_version

## Chapter 4

# Person

### 4.1 Label Colors

In order to obtain the colours blue and rose in the chart representing the gender distribution, add the following JSON entry to the JSON object of the JSON Metadata field on the edit dashboard page:

```
"label_colors": {  
  "Male": "#3366FF",  
  "Female": "#FF3399"  
}
```

### 4.2 CSS

To hide the dashboard header insert the following css code to the CSS field on the edit page:

```
.dashboard > div:not(.dashboard-content) { /* dashboard header */  
  display: none;  
}
```

### 4.3 Data Source Filter

For the filter to work the name of the fields to filter should match in all tables used on the charts of this dashboard.

#### 4.3.1 SQL query

No SQL query, use the sql table `data_source` of the `achilles` database.

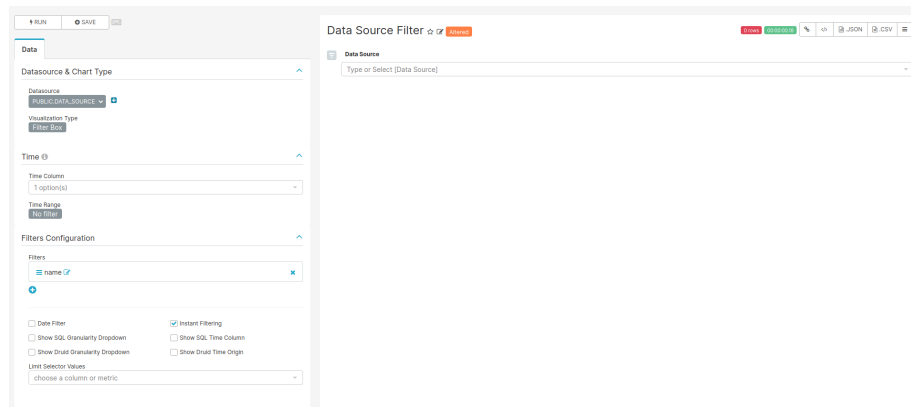


Figure 4.1: Settings for creating the Data Source filter chart

### 4.3.2 Chart settings

- Data Tab
  - Datasource & Chart Type
    - \* Visualization Type: Filter Box
  - Time
    - \* Time range: No filter
  - Filters Configuration
    - \* Filters:
      - name
    - \* Date Filter: off
    - \* Instant Filtering: on

## 4.4 Age at first observation - Table

### 4.4.1 SQL query

```
SELECT source.name,
       source.acronym,
       SUM(CASE WHEN CAST(stratum_2 AS INTEGER) < 10 THEN count_value END) AS "0-10",
       SUM(CASE WHEN CAST(stratum_2 AS INTEGER) >= 10 AND CAST(stratum_2 AS INTEGER) <
       SUM(CASE WHEN CAST(stratum_2 AS INTEGER) >= 20 AND CAST(stratum_2 AS INTEGER) <
       SUM(CASE WHEN CAST(stratum_2 AS INTEGER) >= 30 AND CAST(stratum_2 AS INTEGER) <
       SUM(CASE WHEN CAST(stratum_2 AS INTEGER) >= 40 AND CAST(stratum_2 AS INTEGER) <
```



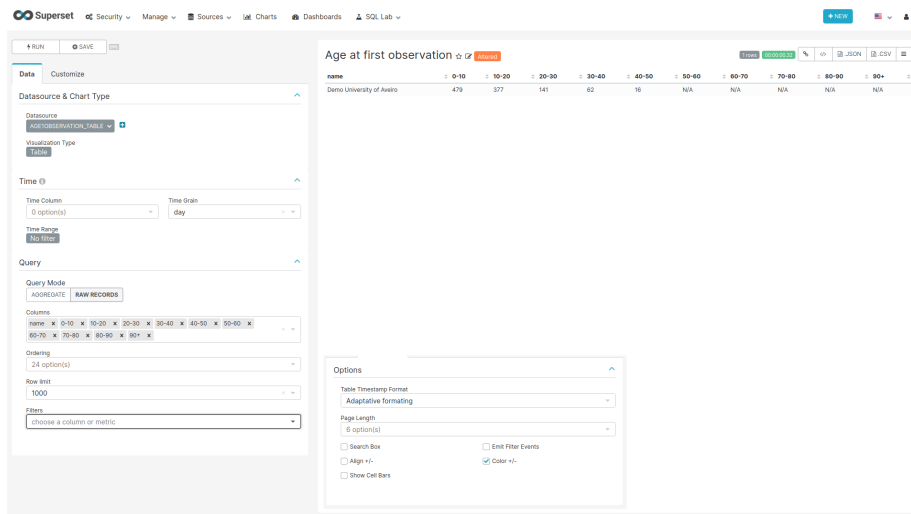


Figure 4.2: Settings for creating the Age at First Observation Table chart

```

SUM(CASE WHEN CAST(stratum_2 AS INTEGER) >= 50 AND CAST(stratum_2 AS INTEGER) < 60 THEN co
SUM(CASE WHEN CAST(stratum_2 AS INTEGER) >= 60 AND CAST(stratum_2 AS INTEGER) < 70 THEN co
SUM(CASE WHEN CAST(stratum_2 AS INTEGER) >= 70 AND CAST(stratum_2 AS INTEGER) < 80 THEN co
SUM(CASE WHEN CAST(stratum_2 AS INTEGER) >= 80 AND CAST(stratum_2 AS INTEGER) < 90 THEN co
SUM(CASE WHEN CAST(stratum_2 AS INTEGER) >= 90 THEN count_value END) AS "90+"
FROM public.achilles_results AS achilles
INNER JOIN public.data_source AS source ON achilles.data_source_id=source.id
INNER JOIN public.concept ON CAST(stratum_1 AS BIGINT) = concept_id
WHERE analysis_id = 102
GROUP BY name, acronym

```

#### 4.4.2 Chart settings

- Data Tab
  - Datasource & Chart Type
    - \* Visualization Type: Table
  - Time
    - \* Time range: No filter
  - Query
    - \* Query Mode: Raw Records
    - \* Columns: name, 0-10, 10-20, 20-30, 30-40, 40-50, 50-60, 60-70, 70-80, 80-90, 90+

- Customize Tab
  - Options
    - \* Show Cell Bars: off

## 4.5 Age at first observation - Bars

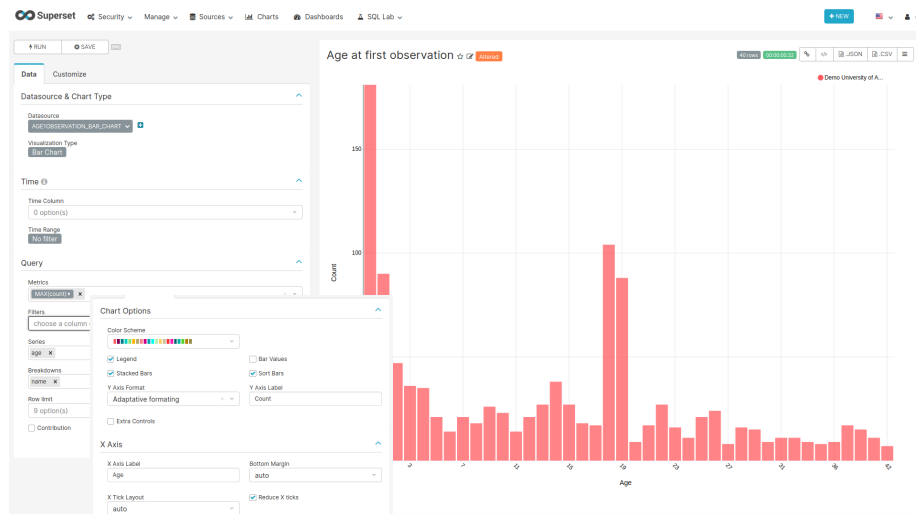


Figure 4.3: Settings for creating the Age at First Observation Bar chart

### 4.5.1 SQL query

```
SELECT source.name,
       cast(stratum_1 AS int) AS Age,
       count_value AS count,
       source.acronym
FROM public.achilles_results AS achilles
INNER JOIN public.data_source AS source ON achilles.data_source_id=source.id
WHERE analysis_id = 101
```

### 4.5.2 Chart settings

- Data Tab
  - Datasource & Chart Type
    - \* Visualization Type: Bar Chart
  - Time

- \* Time range: No filter
- Query
  - \* Metrics: MAX(count)
  - \* Series: age
  - \* Breakdowns: name
- Customize Tab
  - Chart Options
    - \* Stacked Bars: on
    - \* Sort Bars: on
    - \* Y Axis Label: Count
  - X Axis
    - \* X Axis Label: Age
    - \* Reduce X ticks: on

## 4.6 Year of Birth

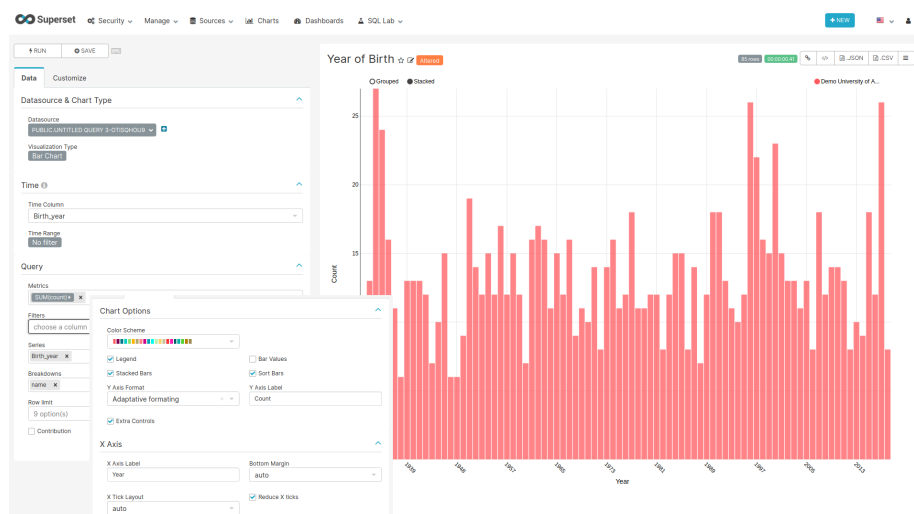


Figure 4.4: Settings for creating the Year of Birth chart

### 4.6.1 SQL query

```
SELECT source.name,  
       source.acronym,  
       stratum_1 AS "Birth_year",  
       count_value AS count  
FROM public.achilles_results AS achilles  
INNER JOIN public.data_source AS source ON achilles.data_source_id=source.id  
WHERE analysis_id = 3
```

### 4.6.2 Chart settings

- Data Tab
  - Datasource & Chart Type
    - \* Visualization Type: Bar Chart
  - Time
    - \* Time range: No filter
  - Query
    - \* Metrics: SUM(count)
    - \* Series: Birth\_year
    - \* Breakdowns: name
- Customize Tab
  - Chart Options
    - \* Stacked Bars: on
    - \* Sort Bars: on
    - \* Y Axis Label: Count
    - \* Extra Controls: on
  - X Axis
    - \* X Axis Label: Year
    - \* Reduce X ticks: on

## 4.7 Gender

### 4.7.1 SQL query

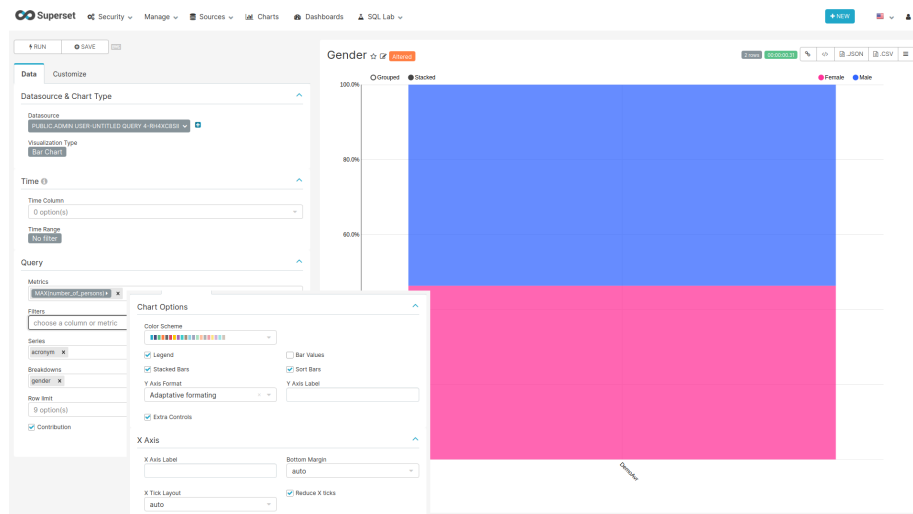


Figure 4.5: Settings for creating the Gender chart

```
SELECT source.name,
       concept_name AS Gender,
       count_value AS Number_of_persons,
       source.acronym
FROM public.achilles_results AS achilles
INNER JOIN public.data_source AS source ON achilles.data_source_id=source.id
JOIN (
  SELECT '8507' AS concept_id, 'Male' AS concept_name
  UNION
  SELECT '8532' AS concept_id, 'Female' AS concept_name
) AS concepts ON achilles.stratum_1 = concept_id
WHERE analysis_id = 2
```

### 4.7.2 Chart settings

- Data Tab
  - Datasource & Chart Type
    - \* Visualization Type: Bar Chart
  - Time
    - \* Time range: No filter
  - Query
    - \* Metrics: MAX(Number\_of\_persons)

- \* Series: acronym
  - \* Breakdowns: gender
  - \* Contribution: on
- Customize Tab
  - Chart Options
    - \* Stacked Bars: on
    - \* Sort Bars: on
    - \* Extra Controls: on
  - X Axis
    - \* Reduce X ticks: on

## Chapter 5

# Observation Period

### 5.1 CSS

To hide the dashboard header insert the following css code to the CSS field on the edit page:

```
.dashboard > div:not(.dashboard-content) { /* dashboard header */
  display: none;
}
```

### 5.2 Data Source Filter

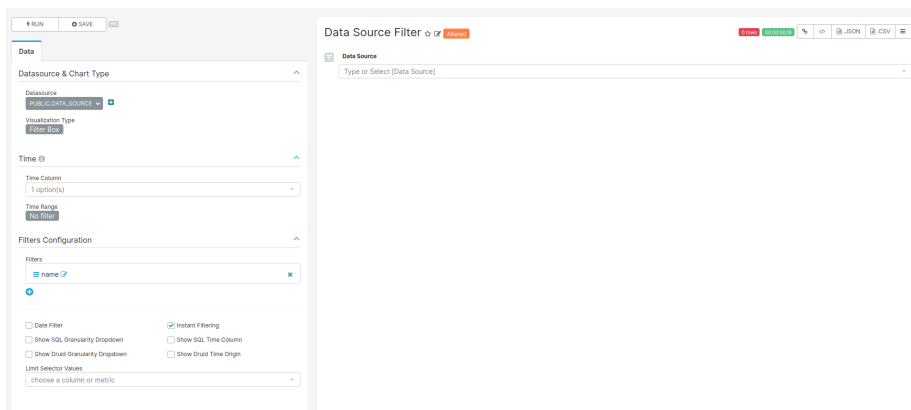


Figure 5.1: Settings for creating the Data Source filter chart

For the filter to work the name of the fields to filter should match in all tables used on the charts of this dashboard.

### 5.2.1 SQL query

No SQL query, use the sql table `data_source` of the `achilles` database.

### 5.2.2 Chart settings

- Data Tab
  - Datasource & Chart Type
    - \* Visualization Type: Filter Box
  - Time
    - \* Time range: No filter
  - Filters Configuration
    - \* Filters:
      - name
    - \* Date Filter: off
    - \* Instant Filtering: on

## 5.3 Number of Patients in Observation Period

The Number of Patients in Observation Period plot shows the number of patients that contribute at least one day in a specific month.

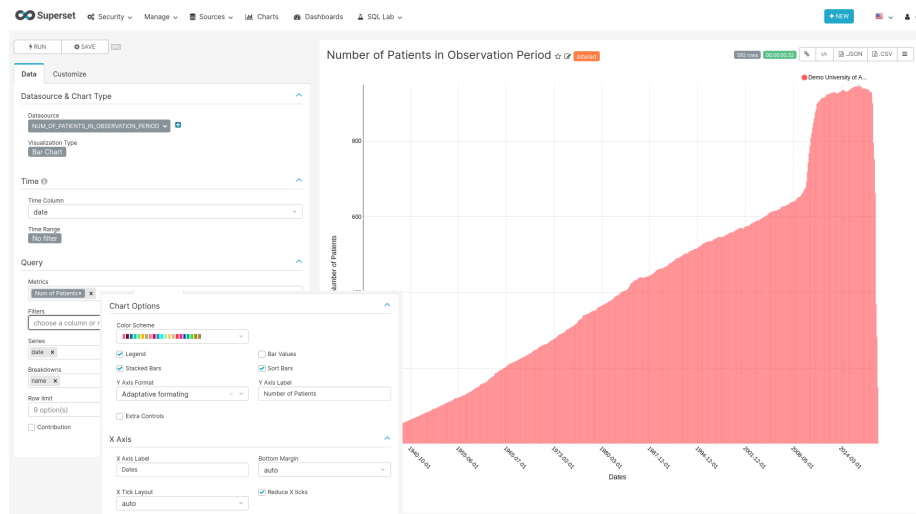


Figure 5.2: Settings for creating the Number of Patients in Observation Period chart



### 5.3.1 SQL query

```
SELECT source.name,  
       source.acronym,  
       to_date(stratum_1, 'YYYYMM') as Date,  
       count_value  
FROM public.achilles_results AS achilles  
INNER JOIN public.data_source AS source ON achilles.data_source_id=source.id  
WHERE analysis_id = 110
```

### 5.3.2 Chart settings

- Data Tab
  - Datasource & Chart Type
    - \* Visualization Type: Bar Chart
  - Time
    - \* Time range: No filter
  - Query
    - \* Metrics: MAX(count\_value) with label “Num of Patients”
    - \* Series: date
    - \* Breakdowns: name
- Customize Tab
  - Chart Options
    - \* Stacked Bars: on
    - \* Sort Bars: on
    - \* Y Axis Label: Number of Patients
  - X Axis
    - \* X Axis Label: Dates
    - \* Reduce X ticks: on

## 5.4 Observation Period Start Dates

### 5.4.1 SQL query

```
SELECT source.name,  
       source.acronym,  
       to_date(stratum_1, 'YYYYMM') AS year_month,
```

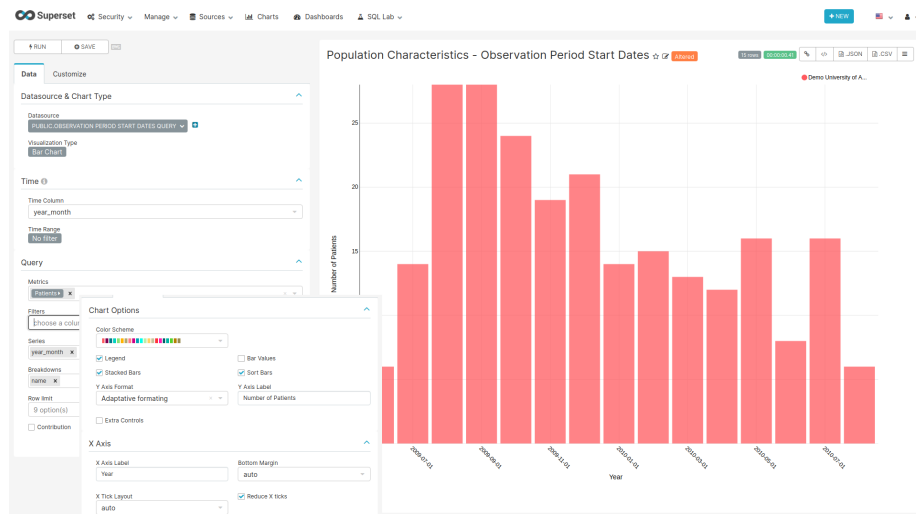


Figure 5.3: Settings for creating the Observation Period Start Dates chart

```

count_value
FROM public.achilles_results AS achilles
INNER JOIN public.data_source AS source ON achilles.data_source_id=source.id
WHERE analysis_id = 111

```

### 5.4.2 Chart settings

- Data Tab
  - Datasource & Chart Type
    - \* Visualization Type: Bar Chart
  - Time
    - \* Time range: No filter
  - Query
    - \* Metrics: SUM(count\_value) with label “Patients”
    - \* Series: year\_month
    - \* Breakdowns: name
- Customize Tab
  - Chart Options
    - \* Stacked Bars: on

- \* Sort Bars: on
- \* Y Axis Label: Number of Patients
- X Axis
  - \* X Axis Label: Year
  - \* Reduce X ticks: on

## 5.5 Observation Period End Dates

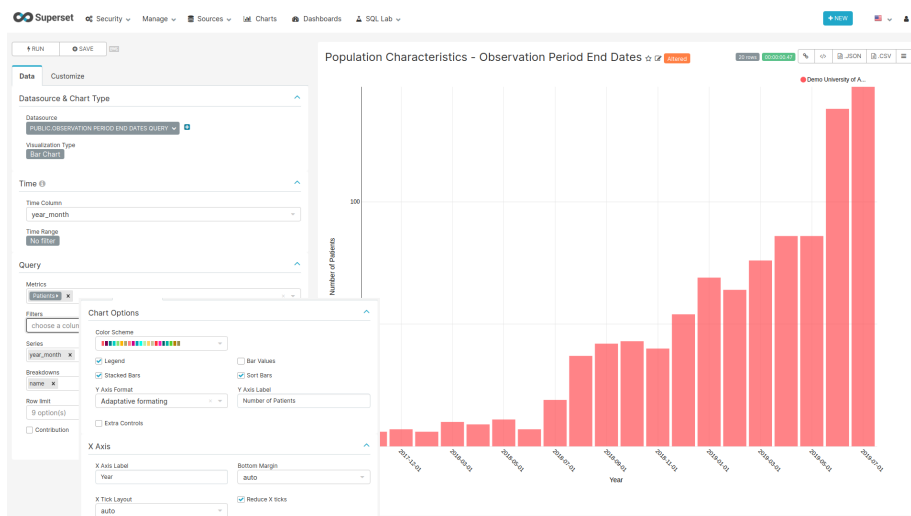


Figure 5.4: Settings for creating the Observation Period End Dates chart

### 5.5.1 SQL query

```
SELECT source.name,
       source.acronym,
       to_date(stratum_1, 'YYYYMM') AS year_month,
       count_value
FROM public.achilles_results AS achilles
INNER JOIN public.data_source AS source ON achilles.data_source_id=source.id
WHERE analysis_id = 112
```

### 5.5.2 Chart settings

- Data Tab
  - Datasource & Chart Type

- \* Visualization Type: Bar Chart
- Time
  - \* Time range: No filter
- Query
  - \* Metrics: SUM(count\_\_value) with label “Patients”
  - \* Series: year\_\_month
  - \* Breakdowns: name
- Customize Tab
  - Chart Options
    - \* Stacked Bars: on
    - \* Sort Bars: on
    - \* Y Axis Label: Number of Patients
  - X Axis
    - \* X Axis Label: Year
    - \* Reduce X ticks: on

# Chapter 6

## Visit

This dashboard shows the different types of visits per data source (see Visit Occurrence Table)

### 6.1 CSS

To hide the dashboard header insert the following css code to the CSS field on the edit page:

```
.dashboard > div:not(.dashboard-content) { /* dashboard header */
  display: none;
}
```

### 6.2 Data Source Filter

For the filter to work the name of the fields to filter should match in all tables used on the charts of this dashboard.

#### 6.2.1 SQL query

No SQL query, use the sql table `data_source` of the `achilles` database.

#### 6.2.2 Chart settings

- Data Tab
  - Datasource & Chart Type
    - \* Visualization Type: Filter Box
  - Time

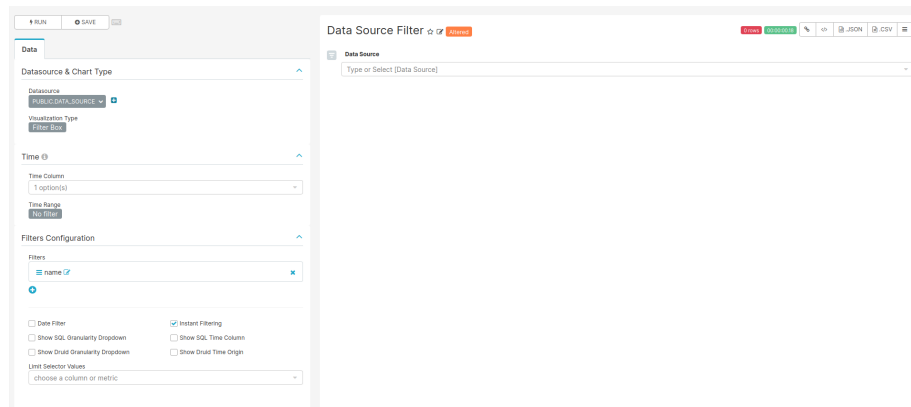


Figure 6.1: Settings for creating the Data Source filter chart

- \* Time range: No filter
- Filters Configuration
  - \* Filters:
    - name
  - \* Date Filter: off
  - \* Instant Filtering: on

## 6.3 Visit Type Table

### 6.3.1 SQL query

```
SELECT source.name,
       source.acronym,
       concept_name AS "Type",
       MAX(count_value) AS "Count"
FROM public.achilles_results AS achilles
INNER JOIN public.data_source AS source ON achilles.data_source_id=source.id
INNER JOIN public.concept ON CAST(stratum_1 AS BIGINT) = concept_id
WHERE analysis_id = 201
GROUP BY name, acronym, "Type"
ORDER BY "Count" DESC
```

### 6.3.2 Chart settings

- Data Tab
  - Datasource & Chart Type

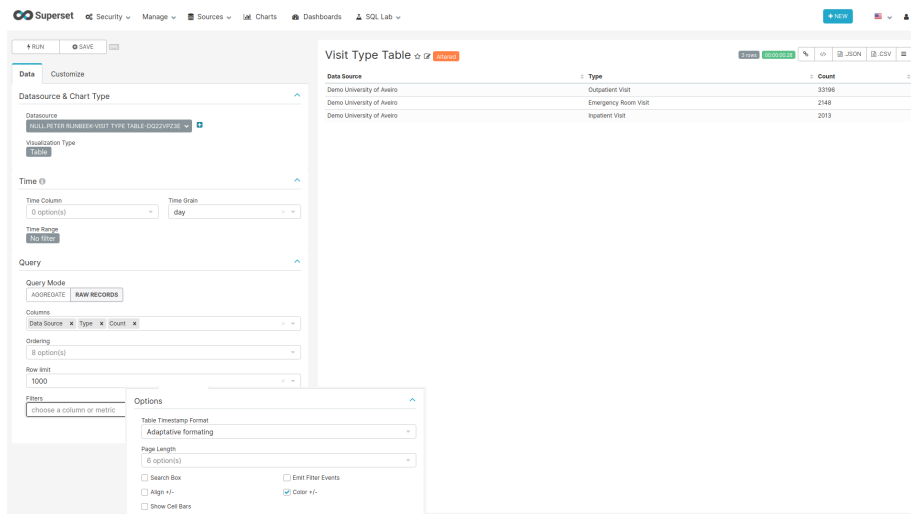


Figure 6.2: Settings for creating the Visit Type Table chart

- \* Visualization Type: Table
- Time
  - \* Time range: No filter
- Query
  - \* Query Mode: Raw Records
  - \* Columns: name with label “Data Source”, Type, Count

## 6.4 Visit Types Bars

### 6.4.1 SQL query

```
SELECT source.name,
       source.acronym,
       concept_name AS "Observation",
       count_value
FROM public.achilles_results AS achilles
INNER JOIN public.data_source AS source ON achilles.data_source_id=source.id
INNER JOIN public.concept ON CAST(stratum_1 AS BIGINT) = concept_id
WHERE analysis_id = 201
```

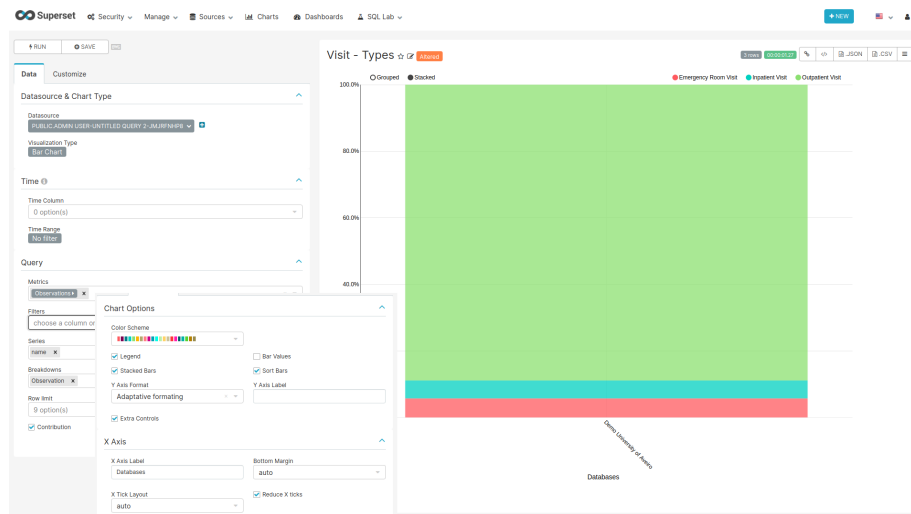


Figure 6.3: Settings for creating the Visit Types bar chart

### 6.4.2 Chart settings

- Data Tab
  - Datasource & Chart Type
    - \* Visualization Type: Bar Chart
  - Time
    - \* Time range: No filter
  - Query
    - \* Metrics: MAX(count\_value) with label Observations
    - \* Series: name
    - \* Breakdowns: Observation
- Customize Tab
  - Chart Options
    - \* Stacked Bars: on
    - \* Sort Bars: on
    - \* Extra Controls: on
  - X Axis
    - \* X Axis Label: Databases



\* Reduce X ticks: on



## Chapter 7

# Death

### 7.1 CSS

To hide the dashboard header insert the following css code to the CSS field on the edit page:

```
.dashboard > div:not(.dashboard-content) { /* dashboard header */  
  display: none;  
}
```

### 7.2 Data Source Filter

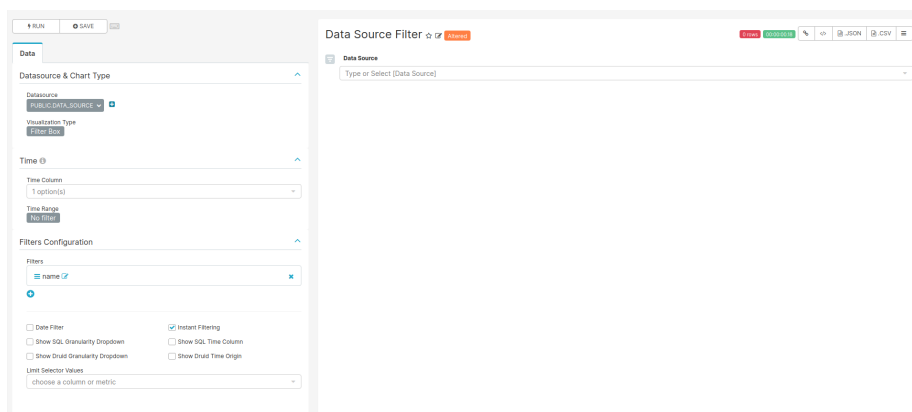


Figure 7.1: Settings for creating the Data Source filter chart

For the filter to work the name of the fields to filter should match in all tables used on the charts of this dashboard.

### 7.2.1 SQL query

No SQL query, use the sql table `data_source` of the `achilles` database.

### 7.2.2 Chart settings

- Data Tab
  - Datasource & Chart Type
    - \* Visualization Type: Filter Box
  - Time
    - \* Time range: No filter
  - Filters Configuration
    - \* Filters:
      - name
    - \* Date Filter: off
    - \* Instant Filtering: on

## 7.3 Number of Records

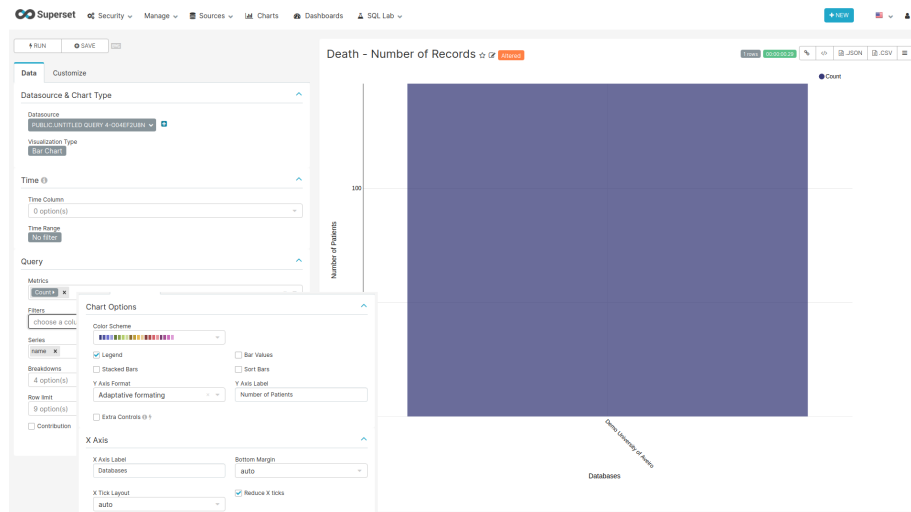


Figure 7.2: Settings for creating the Number of Records chart

### 7.3.1 SQL query

```
SELECT source.name,
       count_value,
       source.acronym
FROM public.achilles_results AS achilles
```

```
INNER JOIN public.data_source AS source ON achilles.data_source_id=source.id
WHERE analysis_id = 501
```

### 7.3.2 Chart settings

- Data Tab
  - Datasource & Chart Type
    - \* Visualization Type: Bar Chart
  - Time
    - \* Time range: No filter
  - Query
    - \* Metrics: MAX(count\_value) with label Count
    - \* Series: name
- Customize Tab
  - Chart Options
    - \* Y Axis Label: Number of Patients
  - X Axis
    - \* X Axis Label: Databases
    - \* Reduce X ticks: on

## 7.4 Death By Year per Thousand People

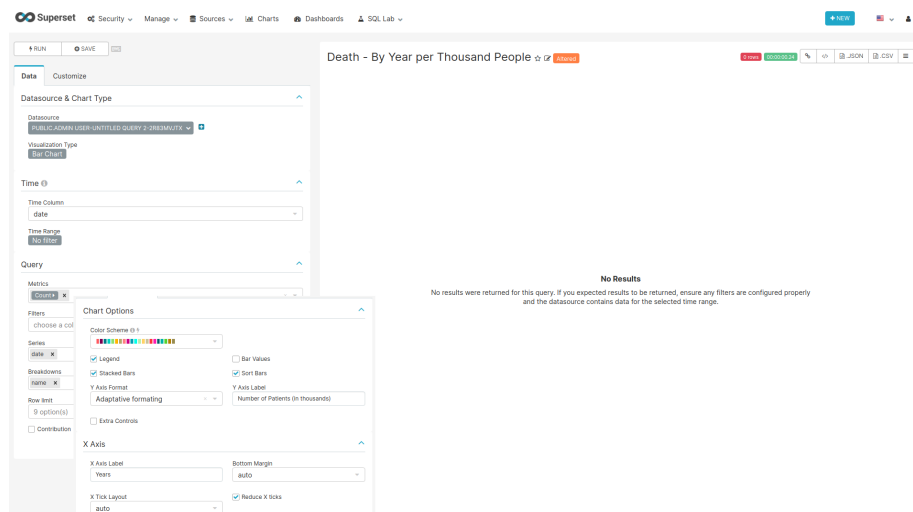


Figure 7.3: Settings for creating the Death by Year per Thousand People chart

### 7.4.1 SQL query

```
SELECT source.name,  
       source.acronym,  
       EXTRACT(year FROM TO_DATE(stratum_1, 'YYYYMM')) AS Date,  
       count_value  
FROM public.achilles_results as achilles  
INNER JOIN public.data_source as source ON achilles.data_source_id=source.id  
WHERE analysis_id = 502
```

### 7.4.2 Chart settings

- Data Tab
  - Datasource & Chart Type
    - \* Visualization Type: Bar Chart
  - Time
    - \* Time range: No filter
  - Query
    - \* Metrics: MAX(count\_value) with label Count
    - \* Series: date
    - \* Breakdowns: name
- Customize Tab
  - Chart Options
    - \* Stacked Bars: on
    - \* Sort Bars: on
    - \* Y Axis Label: Number of Patients (in thousands)
  - X Axis
    - \* X Axis Label: Years
    - \* Reduce X ticks: on

## Chapter 8

# Concepts Browser

The concepts browser allows you to search for concepts by name or concept\_id in all the data sources you select. No exact number of patients or occurrences are provided but the magnitude of both.

### 8.1 CSS

To hide the dashboard header insert the following css code to the CSS field on the edit page:

```
.dashboard > div:not(.dashboard-content) { /* dashboard header */
  display: none;
}
```

### 8.2 Data Source and Domain Filters

For the filters to work the name of the fields to filter should match in all tables used on the charts of this dashboard.

#### 8.2.1 SQL query

```
SELECT concept_name,
       domain_id,
       source.name AS source_name,
       source.acronym
FROM achilles_results
JOIN concept ON cast(stratum_1 AS BIGINT) = concept_id
INNER JOIN public.data_source AS source ON data_source_id=source.id
WHERE analysis_id in (201, 401, 601, 701, 801, 901, 1001, 1801, 200, 400, 600, 700, 800, 1800)
```

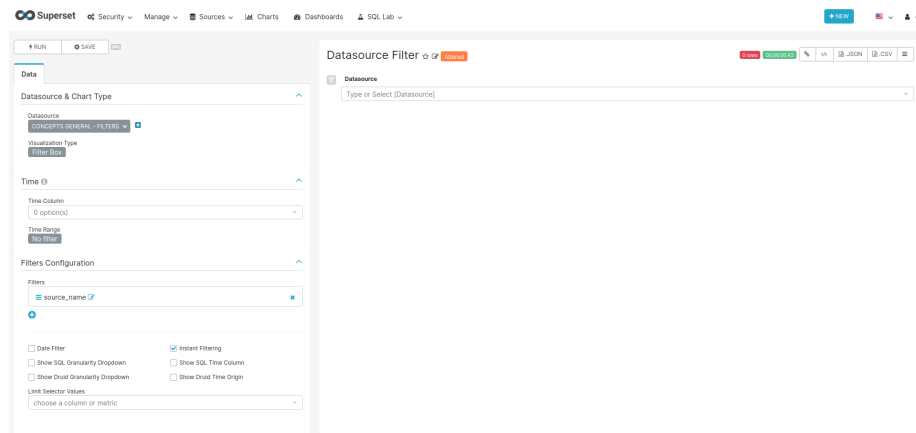


Figure 8.1: Settings for creating the Data Source and Domain filter charts

## 8.2.2 Chart settings

- Data Tab
  - Datasource & Chart Type
    - \* Visualization Type: Filter Box
  - Time
    - \* Time range: No filter
  - Filters Configuration
    - \* Filters:
      - source\_name or domain\_id
    - \* Date Filter: off
    - \* Instant Filtering: on

## 8.3 Number of Concepts

### 8.3.1 SQL Query

Same as Data Source and Domain filters query

### 8.3.2 Chart settings

- Data Tab
  - Datasource & Chart Type
    - \* Visualization Type: Big Number
  - Time Time range: No filter
  - Query
    - \* Metric: COUNT\_DISTINCT(concept\_name) with label Concepts
- Customize Tab



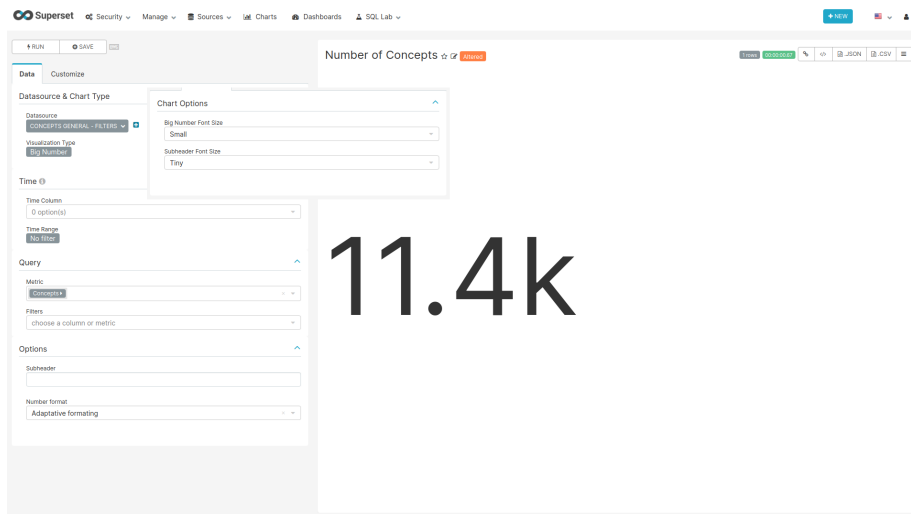


Figure 8.2: Settings for creating the Number of Concepts chart

- Big Number Font Size: Small
- Subheader Font Size: Tiny

## 8.4 Concept Browser Table

```

SELECT
    q1.concept_id AS concept_id,
    q1.concept_name AS concept_name,
    q1.domain_id,
    source.name AS source_name,
    source.acronym,
    sum(q1.count_value) as "Occurrence_count",
    sum(q1.count_person) as "Person_count",
    CASE
        WHEN sum(q1.count_value) <= 10 THEN '<=10'
        WHEN sum(q1.count_value) <= 100 THEN '11-10^2'
        WHEN sum(q1.count_value) <= 1000 THEN '10^2-10^3'
        WHEN sum(q1.count_value) <= 10000 THEN '10^3-10^4'
        WHEN sum(q1.count_value) <= 100000 THEN '10^4-10^5'
        WHEN sum(q1.count_value) <= 1000000 THEN '10^5-10^6'
        ELSE '>10^6'
    END as "magnitude_occurrences",
    CASE
        WHEN sum(q1.count_person) <= 10 THEN '<=10'
        WHEN sum(q1.count_person) <= 100 THEN '11-10^2'
    
```

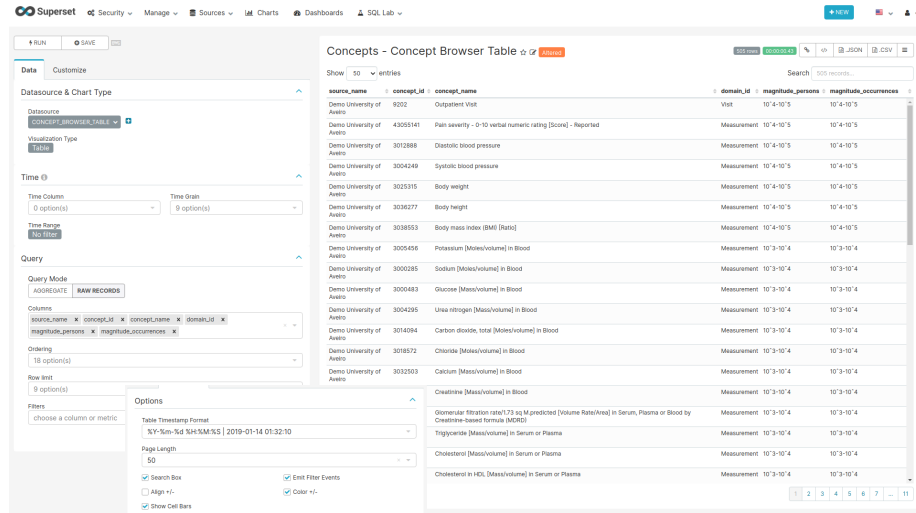


Figure 8.3: Settings for creating the Concepts Table chart

```

WHEN sum(q1.count_person)<=1000 THEN '10^2-10^3'
WHEN sum(q1.count_person)<=10000 THEN '10^3-10^4'
WHEN sum(q1.count_person)<=100000 THEN '10^4-10^5'
WHEN sum(q1.count_person)<=1000000 THEN '10^5-10^6'
ELSE '>10^6'
END AS "magnitude_persons"
FROM (SELECT analysis_id,
             stratum_1 concept_id,
             data_source_id,
             concept_name,
             domain_id,
             count_value, 0 as count_person
FROM achilles_results
JOIN concept ON cast(stratum_1 AS BIGINT)=concept_id
WHERE analysis_id in (201, 301, 401, 601, 701, 801, 901, 1001, 1801)
UNION (SELECT analysis_id,
             stratum_1 concept_id,
             data_source_id,
             concept_name,
             domain_id,
             0 as count_value,
             sum(count_value) as count_person
FROM achilles_results
JOIN concept on cast(stratum_1 as BIGINT)=concept_id
WHERE analysis_id in (202, 401, 601, 701, 801, 901, 1001, 1801)

```

```
GROUP BY analysis_id, stratum_1, data_source_id, concept_name, domain_id) ) as q1
INNER JOIN public.data_source AS source ON q1.data_source_id=source.id
GROUP BY q1.concept_id, q1.concept_name, q1.domain_id, source.name, acronym
ORDER BY "Person_count" desc
```

### 8.4.1 Chart settings

- Data Tab
  - Datasource & Chart Type
    - \* Visualization Type: Table
  - Time
    - \* Time range: No filter
  - Query
    - \* Query Mode: Raw Records
    - \* Columns: source\_name, concept\_id, concept\_name, domain\_id, magnitude\_persons, magnitude\_occurrences
- Customize Tab
  - Options
    - \* Table Timestamps Format: %Y-%m-%d %H:%M:%S | 2019-01-14 01:32:10
    - \* Page Length: 50
    - \* Search Box: on
    - \* Emit Filter Events: on



# Chapter 9

## Provenance

This Dashboard shows the provenance of the data in the different data domains.

### 9.1 CSS

To hide the dashboard header insert the following css code to the CSS field on the edit page:

```
.dashboard > div:not(.dashboard-content) { /* dashboard header */  
  display: none;  
}
```

### 9.2 Data Source Filter

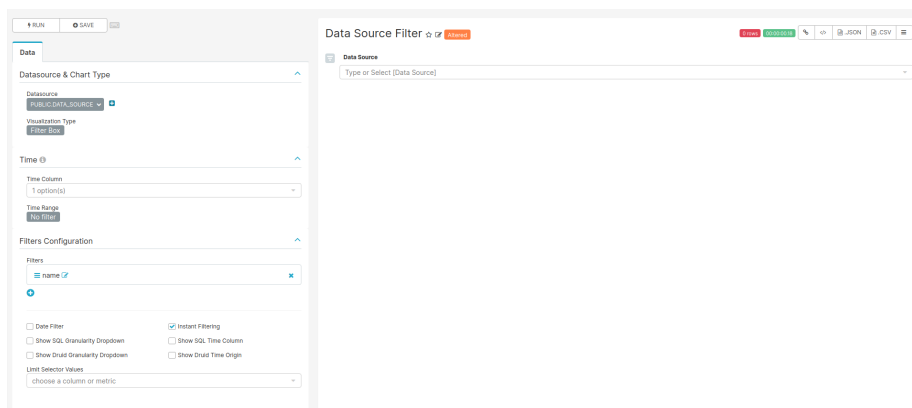


Figure 9.1: Settings for creating the Data Source filter chart

For the filter to work the name of the fields to filter should match in all tables used on the charts of this dashboard.

### 9.2.1 SQL query

No SQL query, use the sql table `data_source` of the `achilles` database.

### 9.2.2 Chart settings

- Data Tab
  - Datasource & Chart Type
    - \* Visualization Type: Filter Box
  - Time
    - \* Time range: No filter
  - Filters Configuration
    - \* Filters:
      - name
    - \* Date Filter: off
    - \* Instant Filtering: on

## 9.3 Condition & Drug & Procedure & Device & Measurement & Observation Types

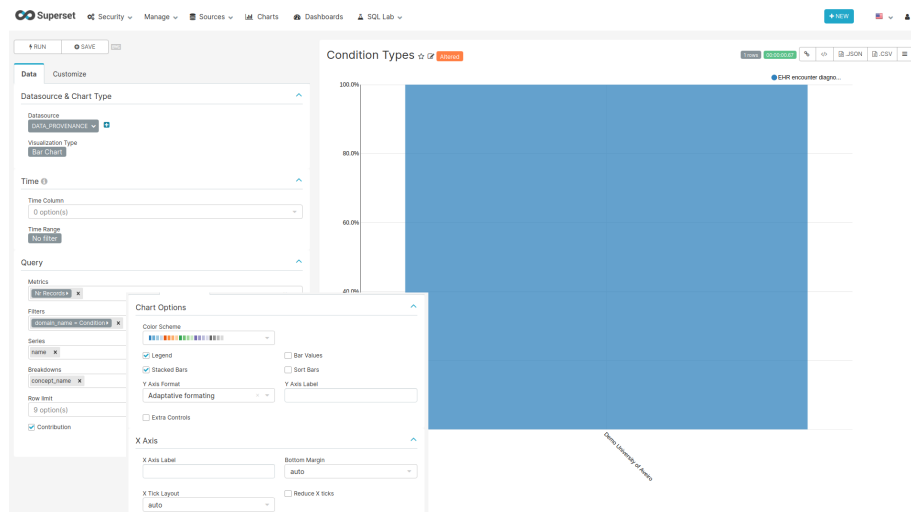


Figure 9.2: Settings for creating the Condition, Drug, Procedure, Device, Measurement and Observation charts

### 9.3.1 SQL query

All 6 charts use the same sql query.

```
SELECT source.name,
       source.acronym,
       CASE WHEN analysis_id = 405 THEN 'Condition'
            WHEN analysis_id = 605 THEN 'Procedure'
            WHEN analysis_id = 705 THEN 'Drug'
            WHEN analysis_id = 805 THEN 'Observation'
            WHEN analysis_id = 1805 THEN 'Measurement'
            WHEN analysis_id = 2105 THEN 'Device'
            ELSE 'Other' END AS domain_name,
       concept_name,
       SUM(count_value) AS num_records
FROM public.achilles_results AS achilles
INNER JOIN public.data_source AS source ON achilles.data_source_id=source.id
INNER JOIN public.concept AS c1 ON CAST(stratum_2 AS BIGINT) = concept_id
WHERE analysis_id IN (405,605,705,805,1805,2105)
GROUP BY source.name, source.acronym, concept_name,
         CASE WHEN analysis_id = 405 THEN 'Condition'
              WHEN analysis_id = 605 THEN 'Procedure'
              WHEN analysis_id = 705 THEN 'Drug'
              WHEN analysis_id = 805 THEN 'Observation'
              WHEN analysis_id = 1805 THEN 'Measurement'
              WHEN analysis_id = 2105 THEN 'Device'
              ELSE 'Other' END
```

### 9.3.2 Chart settings

- Data Tab
  - Datasource & Chart Type
    - \* Visualization Type: Bar Chart
  - Time
    - \* Time range: No filter
  - Query
    - \* Metrics: SUM(num\_records) with label Nr Records
    - \* Filters: domain\_name=Condition or domain\_name=Drug or domain\_name=Procedure or domain\_name=Device or domain\_name=Measurement or domain\_name=Observation
    - \* Series: name
    - \* Breakdowns: concept\_name
    - \* Contribution: on
- Customize Tab
  - Chart Options
    - \* Stacked Bars: on





## Chapter 10

# Data Domains

### 10.1 CSS

To hide the dashboard header insert the following css code to the CSS field on the edit page:

```
.dashboard > div:not(.dashboard-content) { /* dashboard header */  
  display: none;  
}
```

### 10.2 Data Source Filter

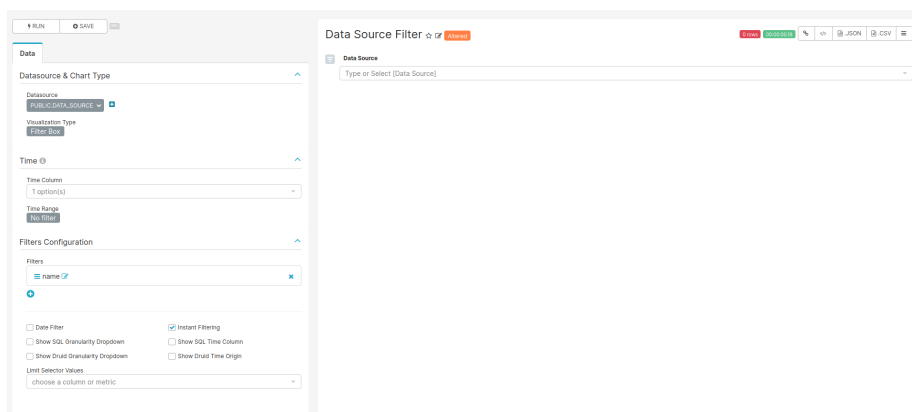


Figure 10.1: Settings for creating the Data Source filter chart

**For the filter to work the name of the fields to filter should match in all tables used on the charts of this dashboard.**

### 10.2.1 SQL query

No SQL query, use the sql table `data_source` of the `achilles` database.

### 10.2.2 Chart settings

- Data Tab
  - Datasource & Chart Type
    - \* Visualization Type: Filter Box
  - Time
    - \* Time range: No filter
  - Filters Configuration
    - \* Filters:
      - name
    - \* Date Filter: off
    - \* Instant Filtering: on

## 10.3 Average Number of Records per Person

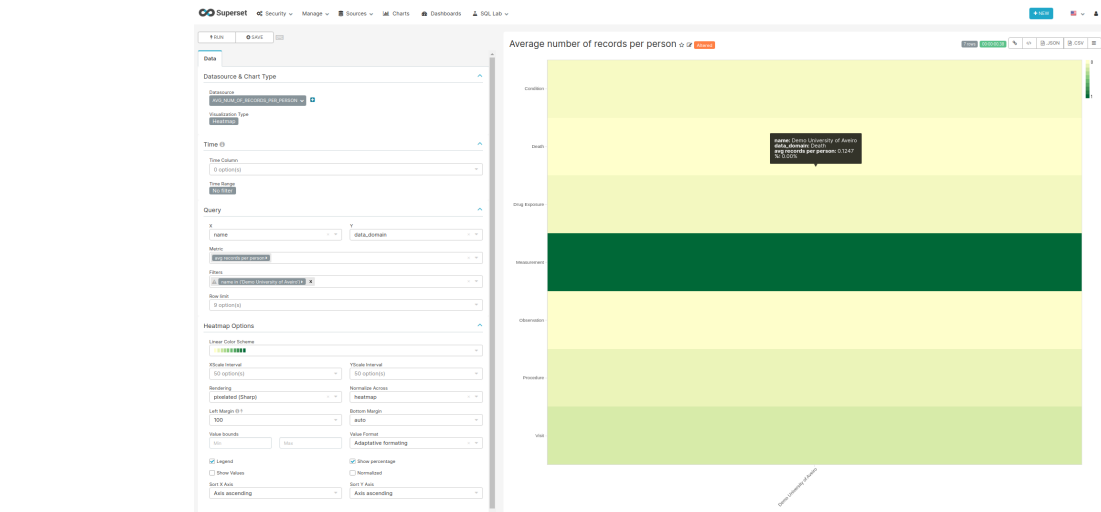


Figure 10.2: Settings for creating the Data Source filter chart

### 10.3.1 SQL query

```
SELECT
    source.name,
    source.acronym,
    CASE
```

```

    WHEN analysis_id = 201 THEN 'Visit'
    WHEN analysis_id = 401 THEN 'Condition'
    WHEN analysis_id = 501 THEN 'Death'
    WHEN analysis_id = 601 THEN 'Procedure'
    WHEN analysis_id = 701 THEN 'Drug Exposure'
    WHEN analysis_id = 801 THEN 'Observation'
    WHEN analysis_id = 1801 THEN 'Measurement'
    WHEN analysis_id = 2101 THEN 'Device'
    WHEN analysis_id = 2201 THEN 'Note'
  END AS Data_Domain,
  SUM(count_value) /AVG(num_persons) AS "records_per_person"
FROM public.achilles_results AS achilles
INNER JOIN public.data_source AS source ON achilles.data_source_id=source.id
INNER JOIN (
  SELECT data_source_id , count_value as num_persons
  FROM achilles_results
  WHERE analysis_id = 1) counts ON achilles.data_source_id = counts.data_source_id
GROUP BY analysis_id, source.name, source.acronym
HAVING analysis_id IN (201, 401, 501, 601, 701, 801, 1801, 2101, 2201)

```

### 10.3.2 Chart settings

- Data Tab
  - Datasource & Chart Type
    - \* Visualization Type: Heatmap
  - Time
    - \* Time range: No filter
  - Query
    - \* X: name
    - \* Y: data\_domain
    - \* Metric: AVG(records\_per\_person) with a label avg records per person
    - \* Row limit: None
  - Heatmap Options
    - \* Left Margin: 100
    - \* Show Percentage: off



# Chapter 11

## Per Database

### 11.1 Label Colors

In order to obtain the colours blue and rose in the chart representing the gender distribution, add the following JSON entry to the JSON object of the JSON Metadata field on the edit dashboard page:

```
"label_colors": {  
  "Male": "#3366FF",  
  "Female": "#FF3399"  
}
```

### 11.2 CSS

To hide the dashboard header insert the following css code to the CSS field on the edit page:

```
.dashboard > div:not(.dashboard-content) { /* dashboard header */  
  display: none;  
}
```

### 11.3 Data Source Filter

For the filter to work the name of the fields to filter should match in all tables used on the charts of this dashboard.

#### 11.3.1 SQL query

No SQL query, use the sql table `data_source` of the `achilles` database.

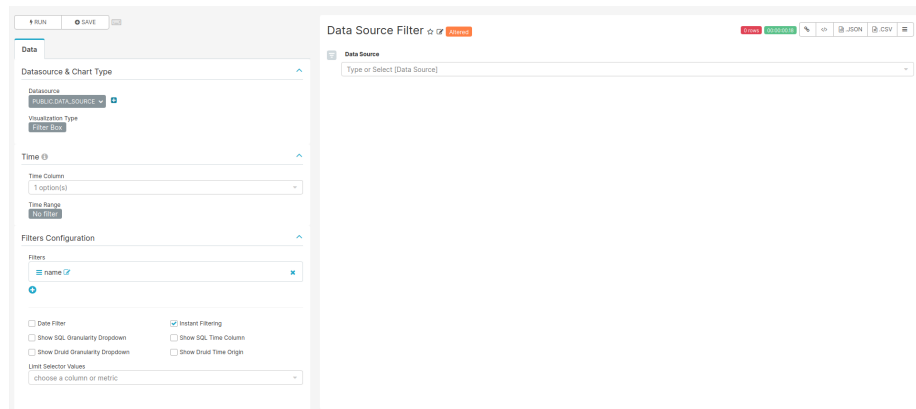


Figure 11.1: Settings for creating the Data Source filter chart

### 11.3.2 Chart settings

- Data Tab
  - Datasource & Chart Type
    - \* Visualization Type: Filter Box
  - Time
    - \* Time range: No filter
  - Filters Configuration
    - \* Filters:
      - name
    - \* Date Filter: off
    - \* Instant Filtering: on

### 11.3.3 Demographics Tab

#### 11.3.3.1 Number of Patients

```
SELECT
    achilles_results.count_value,
    data_source.name,
    data_source.acronym
FROM achilles_results
JOIN data_source ON achilles_results.data_source_id=data_source.id
WHERE analysis_id = 1
```

##### 11.3.3.1.1 SQL query

##### 11.3.3.1.2 Chart settings

- Data Tab

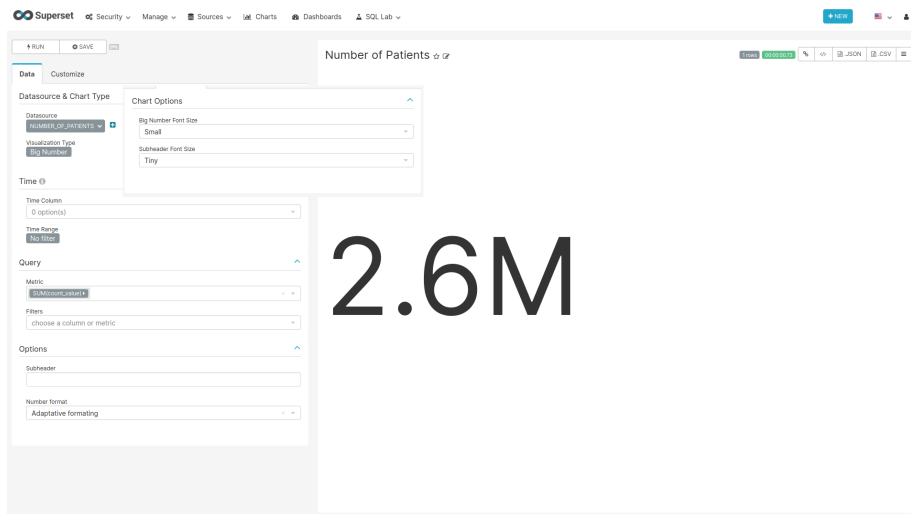


Figure 11.2: Settings for creating the Number of Patients chart

- Datasource & Chart Type
  - \* Visualization Type: Big Number
- Time Time range: No filter
- Query
  - \* Metric: sum(count\_value)
- Customize Tab
  - Big Number Font Size: Small
  - Subheader Font Size: Tiny

### 11.3.3.2 Gender Table

```
SELECT source.name as name,
       source.acronym,
       concept_name as gender,
       count_value
FROM public.achilles_results AS achilles
INNER JOIN public.data_source AS source ON achilles.data_source_id=source.id
INNER JOIN public.concept ON CAST(stratum_1 AS BIGINT) = concept_id
WHERE analysis_id = 2
```

#### 11.3.3.2.1 SQL Query

#### 11.3.3.2.2 Chart settings

- Data Tab
  - Datasource & Chart Type

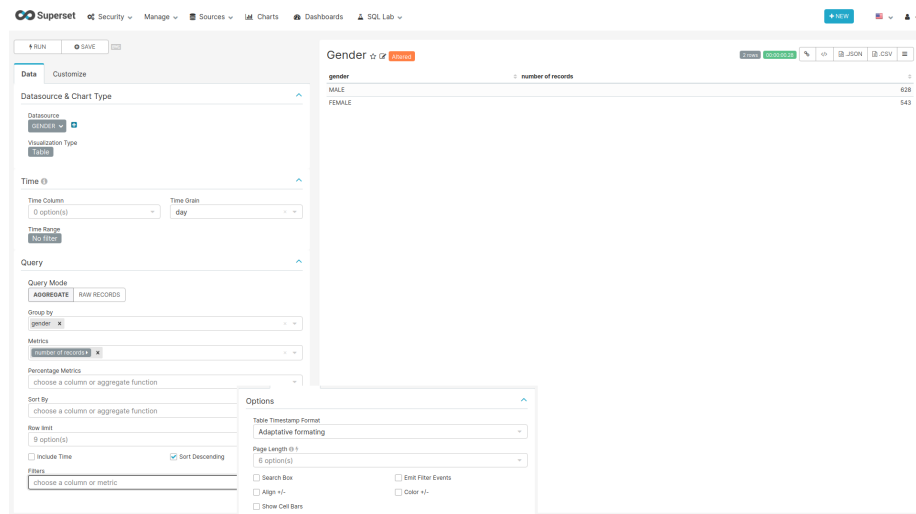


Figure 11.3: Settings for creating the Gender Table chart

- \* Visualization Type: Table
- Time
  - \* Time range: No filter
- Query
  - \* Query Mode: Aggregate
  - \* Group by: gender
  - \* Metrics: SUM(count\_\_value) with label number of records
  - \* Row limit: None
- Customize Tab
  - Options
    - \* Show Cells Bars: off

### 11.3.3.3 Gender Pie

#### 11.3.3.3.1 SQL query Same as Gender Table query

#### 11.3.3.3.2 Chart settings

- Data Tab
  - Datasource & Chart Type
    - \* Visualization Type: Pie Chart
  - Time
    - \* Time range: No filter
  - Query
    - \* Metric: SUM(count\_\_value)
    - \* Group by: gender



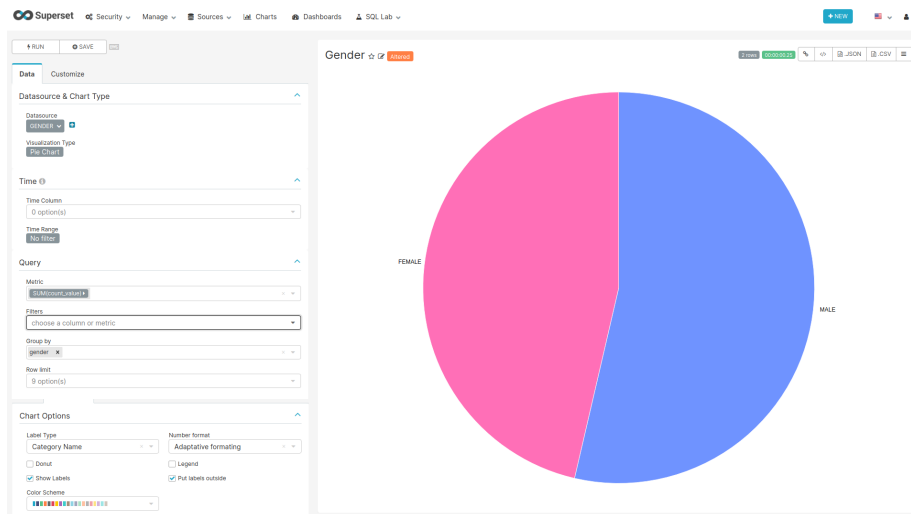


Figure 11.4: Settings for creating the Gender Pie chart

- \* Row limit: None
- Customize Tab
  - Chart Options
    - \* Legend: off

#### 11.3.3.4 Age at first observation - Table

Same chart as the one used on the Person dashboard.

#### 11.3.3.5 Age at first observation - Bars

Same chart as the one used on the Person dashboard.

#### 11.3.3.6 Year of Birth

Same chart as the one used on the Person dashboard.

### 11.3.4 Data Domains Tab

#### 11.3.4.1 Average Number of Records per Person

Same chart as the one used on the Data Domains dashboard.

#### 11.3.4.2 Total Number of Records

```
SELECT
data_source.name,
```

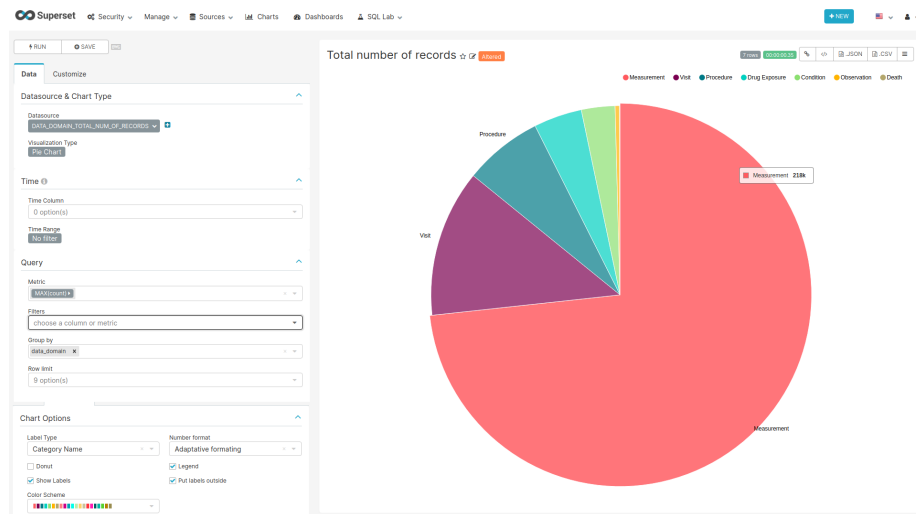


Figure 11.5: Settings for creating the Total Number of Records chart

```
data_source.acronym,
CASE
WHEN analysis_id = 201 THEN 'Visit'
WHEN analysis_id = 401 THEN 'Condition'
WHEN analysis_id = 501 THEN 'Death'
WHEN analysis_id = 601 THEN 'Procedure'
WHEN analysis_id = 701 THEN 'Drug Exposure'
WHEN analysis_id = 801 THEN 'Observation'
WHEN analysis_id = 1801 THEN 'Measurement'
WHEN analysis_id = 2101 THEN 'Device'
WHEN analysis_id = 2201 THEN 'Note'
END AS Data_Domain,
SUM(count_value) AS "count"
FROM achilles_results
JOIN data_source ON achilles_results.data_source_id=data_source.id
GROUP BY name, acronym, analysis_id
HAVING analysis_id IN (201, 401, 501, 601, 701, 801, 1801, 2101, 2201)
```

#### 11.3.4.2.1 SQL query

#### 11.3.4.2.2 Chart settings

- Data Tab
  - Datasource & Chart Type
    - \* Visualization Type: Pie Chart
  - Time

- \* Time range: No filter
- Query
  - \* Metric: MAX(count)
  - \* Group by: data\_domain
  - \* Row limit: None

### 11.3.5 Data Provenance Tab

Same 6 charts used on the Provenance dashboard.

### 11.3.6 Observation Period Tab

#### 11.3.6.1 Number of Patients in Observation Period

Same 6 charts used on the Observation Period dashboard.

#### 11.3.6.2 Cumulative Observation Period

The cumulative observation time plot shows the percentage of patients that have more than X days of observation time.

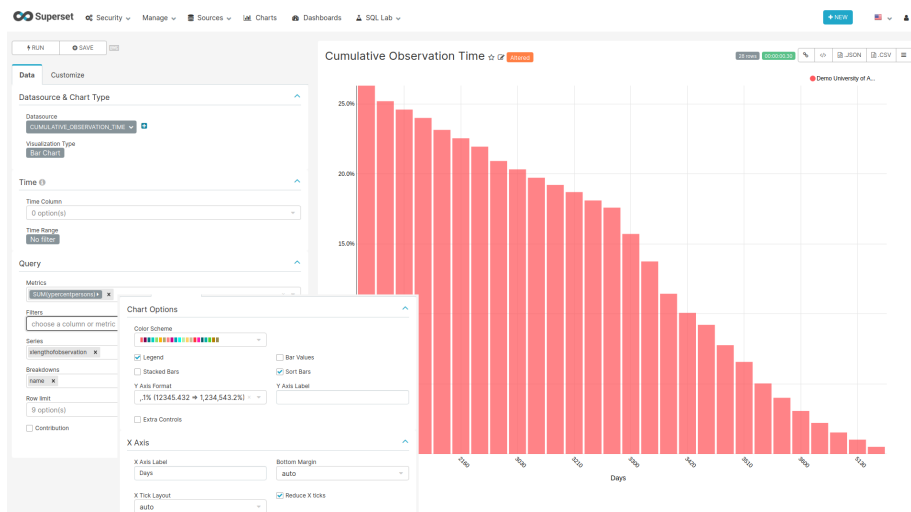


Figure 11.6: Settings for creating the Total Number of Records chart

```
SELECT
  name,
  acronym,
  xLengthOfObservation,
  round(cumulative_sum / total, 5) as yPercentPersons
```

```

FROM (
  SELECT data_source_id, CAST(stratum_1 AS INTEGER) * 30 AS xLengthOfObservation, SUM(
  FROM achilles_results
  WHERE analysis_id = 108
) AS cumulative_sums
JOIN (
  SELECT data_source_id, count_value as total
  FROM achilles_results
  WHERE analysis_id = 1
) AS totals
ON cumulative_sums.data_source_id = totals.data_source_id
JOIN data_source ON cumulative_sums.data_source_id = data_source.id
ORDER BY name, xLengthOfObservation

```

#### 11.3.6.2.1 SQL Query

#### 11.3.6.2.2 Chart settings

- Data Tab
  - Datasource & Chart Type
    - \* Visualization Type: Bar Chart
  - Time
    - \* Time range: No filter
  - Query
    - \* Metrics: SUM(ypercentpersons)
    - \* Series: xlengthofobservation
    - \* Breakdowns: name
    - \* Row limit: None
- Customize Tab
  - Chart Options
    - \* Sort Bars: on
    - \* Y Axis Fomat: .,1% (12345.432 => 1,234,543.2%)
    - \* Y Axis Label: Number of Patients
  - X Axis
    - \* X Axis Label: Days
    - \* Reduce X ticks: on

### 11.3.7 Visit Tab

#### 11.3.7.1 Visit Type Graph

```

SELECT
  data_source.name,
  data_source.acronym,
  concept.concept_name,

```

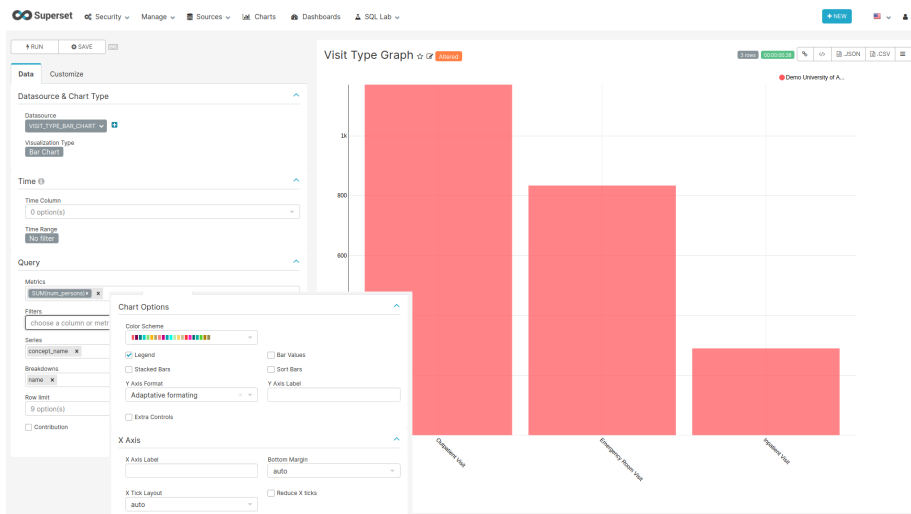


Figure 11.7: Settings for creating the Visit Type Graph chart

```

    achilles_results.count_value AS num_persons
FROM (SELECT * FROM achilles_results WHERE analysis_id = 200) AS achilles_results
JOIN data_source ON achilles_results.data_source_id = data_source.id
JOIN concept ON CAST(achilles_results.stratum_1 AS BIGINT) = concept.concept_id

```

#### 11.3.7.1.1 SQL Query

#### 11.3.7.1.2 Chart settings

- Data Tab
  - Datasource & Chart Type
    - \* Visualization Type: Bar Chart
  - Time
    - \* Time range: No filter
  - Query
    - \* Metrics: SUM(num\_persons)
    - \* Series: concept\_name
    - \* Breakdowns: name
    - \* Row limit: None

#### 11.3.7.2 Visit Type Table

Same chart used on the Visit dashboard.

### **11.3.8 Concept Browser Tab**

#### **11.3.8.1 Concept Browser Table**

Same chart used on the Concept Browser dashboard.

### **11.3.9 Meta Data Tab**

#### **11.3.9.1 Meta Data Table**

Same chart used on the General dashboard.

## Chapter 12

# Data Domains

### 12.1 CSS

To hide the dashboard header insert the following css code to the CSS field on the edit page:

```
.dashboard > div:not(.dashboard-content) { /* dashboard header */  
  display: none;  
}
```

### 12.2 Data Source Filter

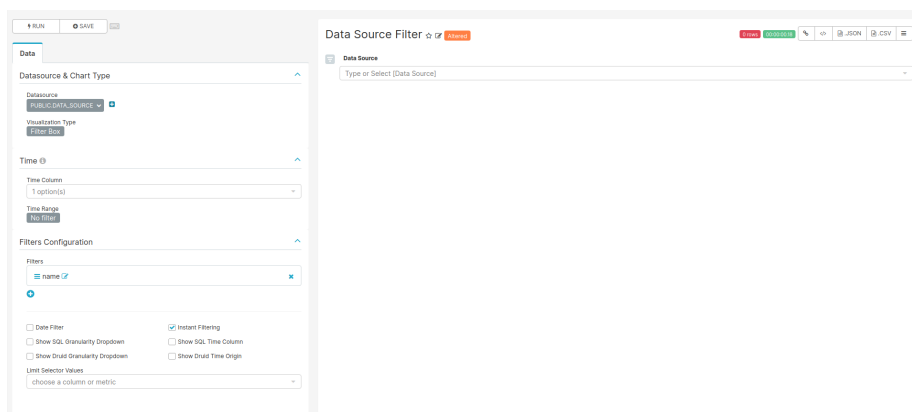


Figure 12.1: Settings for creating the Data Source filter chart

For the filter to work the name of the fields to filter should match in all tables used on the charts of this dashboard.

### 12.2.1 SQL query

No SQL query, use the sql table `data_source` of the `achilles` database.

### 12.2.2 Chart settings

- Data Tab
  - Datasource & Chart Type
    - \* Visualization Type: Filter Box
  - Time
    - \* Time range: No filter
  - Filters Configuration
    - \* Filters:
      - name
    - \* Date Filter: off
    - \* Instant Filtering: on

## 12.3 Average Number of Records per Person

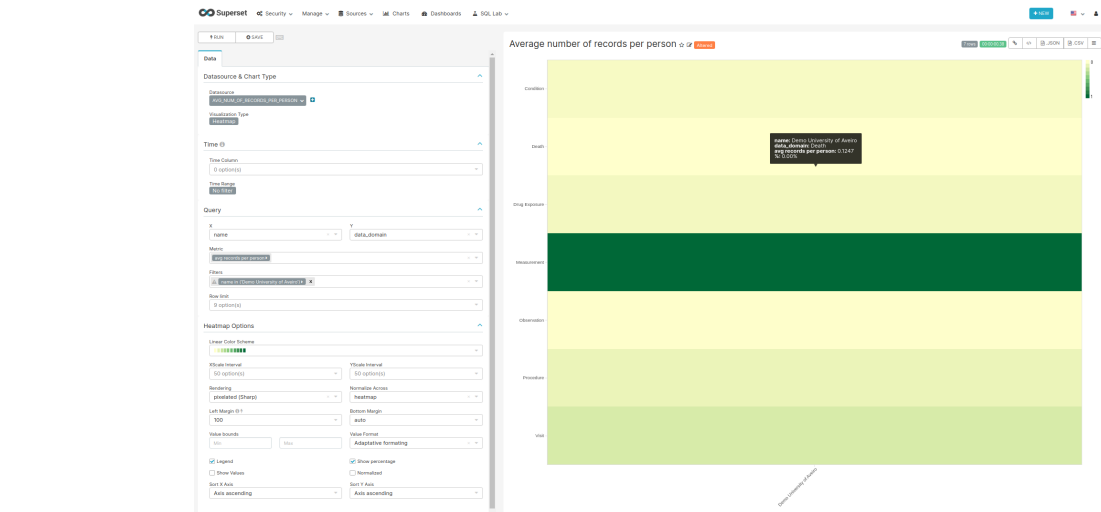


Figure 12.2: Settings for creating the Data Source filter chart

### 12.3.1 SQL query

```
SELECT
    source.name,
    source.acronym,
    CASE
```



```

    WHEN analysis_id = 201 THEN 'Visit'
    WHEN analysis_id = 401 THEN 'Condition'
    WHEN analysis_id = 501 THEN 'Death'
    WHEN analysis_id = 601 THEN 'Procedure'
    WHEN analysis_id = 701 THEN 'Drug Exposure'
    WHEN analysis_id = 801 THEN 'Observation'
    WHEN analysis_id = 1801 THEN 'Measurement'
    WHEN analysis_id = 2101 THEN 'Device'
    WHEN analysis_id = 2201 THEN 'Note'
  END AS Data_Domain,
  SUM(count_value) /AVG(num_persons) AS "records_per_person"
FROM public.achilles_results AS achilles
INNER JOIN public.data_source AS source ON achilles.data_source_id=source.id
INNER JOIN (
  SELECT data_source_id , count_value as num_persons
  FROM achilles_results
  WHERE analysis_id = 1) counts ON achilles.data_source_id = counts.data_source_id
GROUP BY analysis_id, source.name, source.acronym
HAVING analysis_id IN (201, 401, 501, 601, 701, 801, 1801, 2101, 2201)

```

### 12.3.2 Chart settings

- Data Tab
  - Datasource & Chart Type
    - \* Visualization Type: Heatmap
  - Time
    - \* Time range: No filter
  - Query
    - \* X: name
    - \* Y: data\_domain
    - \* Metric: AVG(records\_per\_person) with a label avg records per person
    - \* Row limit: None
  - Heatmap Options
    - \* Left Margin: 100
    - \* Show Percentage: off