



A bystander payload multiplies a conjugate's reach most where the conjugate reaches least


(a) worth most where the antibody reaches least

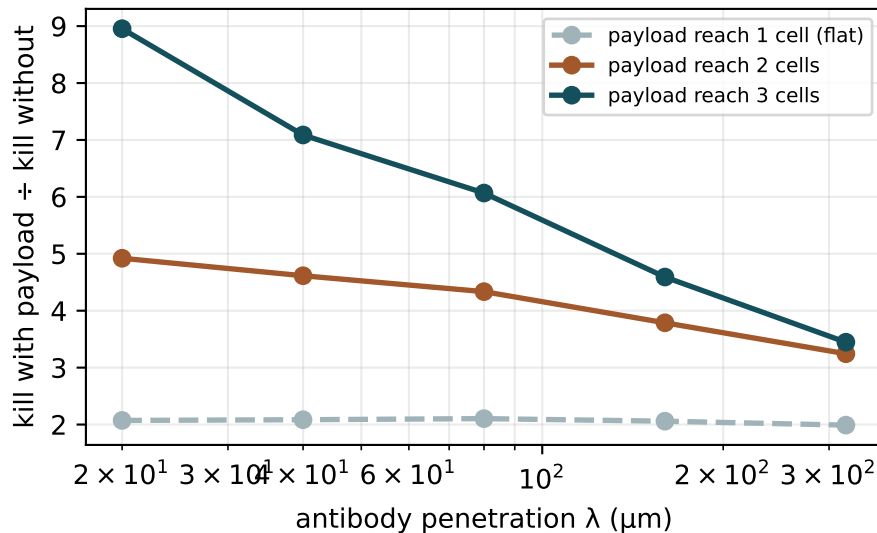

(b) and the absolute count mostly rises

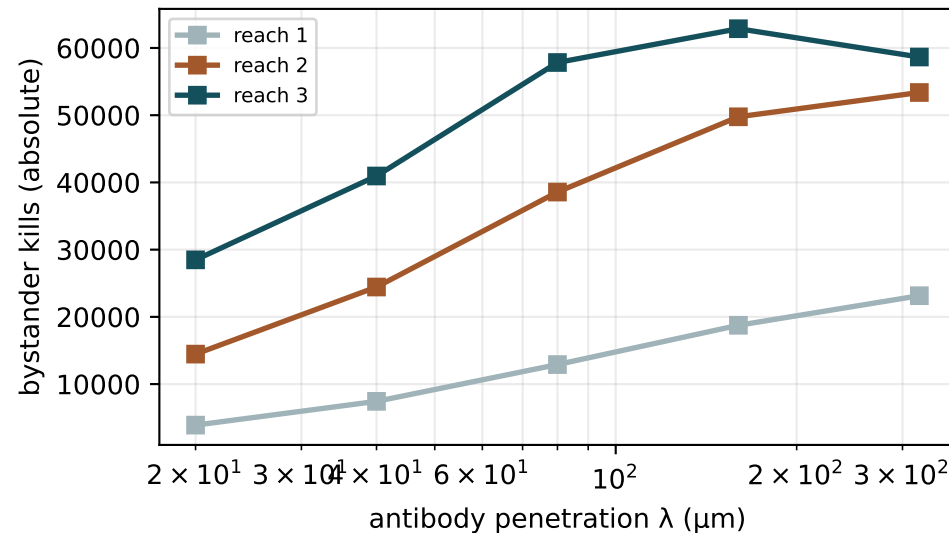

(c) the scalar has no term for penetration

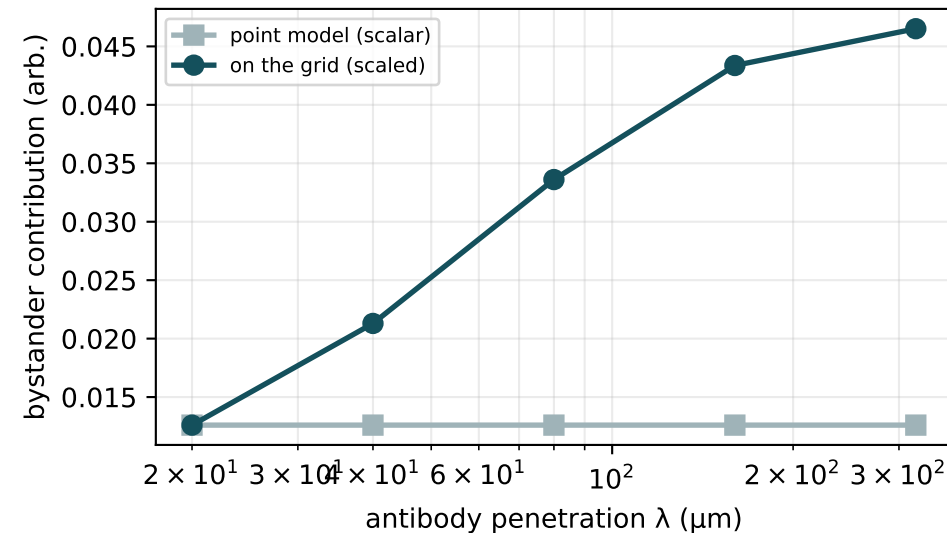

`adc::bystander\_kill\_fraction` takes `neighbours\_in\_reach` as a bare scalar, so the payload has nowhere to go and no distance to travel - which makes the arm's own clinical rationale inexpressible, since a bystander payload exists precisely because the antibody penetrates badly and the small released drug does not. Every point is a matched PAIR of runs differing only in the linker, so the bystander's contribution is measured rather than parameterised. (a) is the prediction and the condition on it together: the advantage falls with penetration at a payload reach of two or three cells and is FLAT at one, because a payload that reaches only its immediate neighbours lands on cells the conjugate reached anyway. The sweep found that condition; it was not chosen. (b) is the column that points the other way and is reported beside it rather than instead of it. (c) is why the arm needed a 'where' at all.