Research Architect for Coordinated AI Research

Technical white paper with an operational case study from the NWSW project

Brandon Santor
Creator and Principal Designer of Research Architect
October 23 2026
Revised public edition 10 Historical RA 2.1 case and RA 2.5.1 engineering update October 23 2026

Executive summary

Research Architect provides an operating framework for human research teams working with AI. It converts a reviewed project design into individual role kits, preserves project state across sessions, records evidence and decisions, and supports versioned handoffs and recovery. The New World Screwworm (NWSW) deployment supplied an active setting in which these mechanisms were used and refined. A shared project Library retains approved research findings with methods, provenance, artifacts and review limits. The Hub has read/write access and alone publishes additions and corrections; Spokes and Ingestor have read-only access to approved evidence, returning new contributions through human review, Hub acceptance and Ingestor validation. [E5] [E6]

The documented results include creator-reported onboarding of eight people, verified remote exchanges, preservation of accumulated files during a live Hub upgrade, and an isolated whole-project restore. RA 2.1.0 distribution revision 2 carries reusable operational improvements into a separate development-preview package. Its October 16 release verification passed 171 offline regression tests. [E1] [E2]

Selected operational and release results [E1] [E2]

Capability	Documented result and scope
Onboarding	Eight people reported onboarded by the creator on October 16; one framework configurator.
Exchange records	262 unique transfer IDs in the October 16 inventory; individual receipts establish delivery.
Live upgrade continuity	701 exchange files preserved and rehashed during the October 13 Hub upgrade.
Project recovery	123,098 files verified in the original October 11 isolated restore exercise.
Release verification	171 offline tests passed on Windows; no model calls or remote transfers in that run.

This edition retains the deployment case and updates the distinction among generic software, project-specific operation, recipient reports and tested behavior. The evidence supports practical continuity and recovery mechanisms. Broader adoption, comparative efficiency and research-quality effects require their own evaluation. RA configures instructions and workflow around existing AI hosts; it does not train model weights.

1 Introduction

AI-assisted research often spans several people, model sessions and collections of files. A useful answer becomes difficult to carry forward when the next session lacks its scope, supporting evidence, decisions or unresolved work. Teams also need to identify the current artifact, distinguish review from delivery and recover work after a session or machine changes.

Existing agent literature supplies useful design context. OpenAI describes models, tools and instructions as foundational components and discusses orchestration and guardrails. AutoGen demonstrates configurable conversations combining agents, tools and human input. Anthropic describes the coordination, evaluation and reliability work behind a deployed multi-agent research system. These sources inform the architectural context; their performance results are not evidence of RA performance. [1] [2] [3]

RA addresses the operating structure surrounding a research task. The Architect helps establish questions, assignments, methods, dependencies and review requirements. A compiler produces individual role kits and coordinated folders. Local helpers preserve state and verify artifacts, while the selected AI host supplies model inference, file access and any available connectors. Human operators retain responsibility for scientific judgments and consequential decisions.

2 System architecture

RA combines a reviewed project design, human-operated roles, persistent records and a shared project Library. Figure 1 separates Hub read/write access from Spoke and Ingestor read-only access. Only the Hub publishes additions and corrections. RA's scientific-methods collection supplies research guidance to the factory; the Library retains approved project findings for contextual reuse. Each host installation needs its own tested startup, storage and transfer configuration. [E3] [E4] [E5] [E6]

Project design and role kits

The Hub issues bounded tasks, reviews contributions and validation results, obtains final human approval and uses its read/write Library authority to publish additions and corrections. Spokes conduct assigned work with their human operators, who accept and approve exact submissions. The Ingestor receives Hub-accepted work, validates it and reproduces results when needed, then returns its findings to the Hub. Generated kits carry these responsibilities, selected methods and continuity records. Generation does not grant remote access or establish scientific approval. [E6]

Persistent context and source retrieval

Supported startup resolves the designated current checkpoint rather than choosing a directory by timestamp. A successor snapshot preserves its base and records changed state. A routed dictionary can direct a Hub to exact original evidence and prior decisions. The generic multipart reader preserves source text and hashes, repeats governing controls and exposes missing or altered parts. Its character limits are distinct from a model provider's token window; reading parts sequentially does not guarantee cumulative model retention.

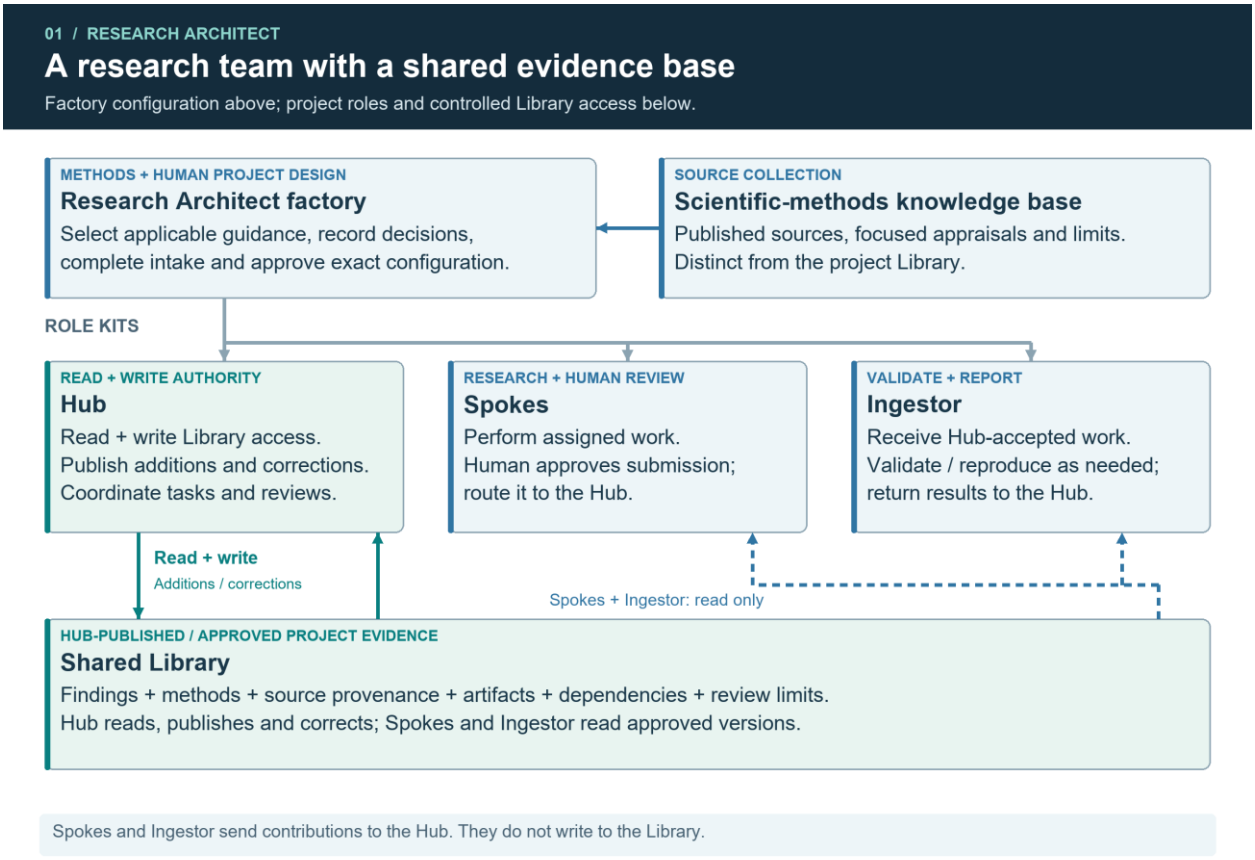


Figure 1 Roles and Library authority. Teal arrows show Hub read/write access for additions and corrections. Dashed blue arrows show Spoke and Ingestor read-only access. Contributions return to the Hub; Figure 5 details review. [E3] [E4] [E5] [E6]

Shared Library and cumulative project knowledge

The shared Library retains approved project evidence and outputs. Researchers and agents inspect prior findings, methods and artifacts for reuse within their recorded scope. The Hub reads the collection and is its sole writer of additions and corrections. Spokes and Ingestor have read-only access. This supplies the shared-learning mechanism: agents retrieve and interpret versioned project knowledge, carrying provenance into new work. [E5] [E6]

Discovery preserves canonical artifact and version identities, original locations, dependencies, review status and correction relationships. Membership references let one canonical item appear in several collections without duplicating the research output. Extracted packages retain their relative paths and parent bindings. A Hub-published correction can be exposed through both the canonical record and its discovery routes, helping agents recognize which version and limitations apply. [E5]

The outward availability labels are Available in Library and Request from Hub. Already-approved files and verified aliases remain usable within their original scope without repeating approval; safe metadata for held work directs a request to the Hub. Shared views use reviewed audience selections and omit restricted internal records. The Library is distinct from RA's bundled scientific-methods collection: the former retains a team's evolving evidence and outputs, while the latter supplies reusable research guidance for configuring kits. [E4] [E5]

Evidence review and decision traceability

The Hub defines a bounded task with scope, inputs, methods, artifacts and acceptance criteria. The Spoke performs it, and its human approves the exact submission. The Hub reviews and accepts it for Ingestor validation and any needed reproduction. The Ingestor returns checks, discrepancies and limits. The Hub obtains final human approval, publishes the exact version with its use scope, and verifies publication. Failed checks return for correction and repeat affected reviews. Other roles propose Library corrections; only the Hub applies and publishes them, preserving prior versions and decisions. [E6]

Human-agent discussions can preserve the decisions, alternatives, objections and reasoning behind an output. The supported reviewer-bundle helper binds supplied conversation files and their declared session coverage to the research package for Hub review. All relevant supplied discussion remains available as evidence; summaries do not replace the transcripts. The helper does not automatically capture every host message, tool call or attachment, so missing coverage must be declared. Transcripts stay in restricted review storage; publishing a research finding does not automatically disclose its raw conversations. [E6]

Versioned handoffs and recovery

Local helpers stage payloads, validate configured routes and retain receipts. Authorized host connectors perform remote transfer during active sessions. Preparation, delivery, reading, adoption, research acceptance and permitted downstream use remain distinct. Backup helpers verify selected project contents and captured external files, retain explicit recovery metadata and exercise restoration. Storage and transport configuration remain responsibilities of the deployment.

3 NWSW deployment

The NWSW project provided an operational case for RA-generated kits and a coordinating Hub. The creator reported onboarding eight people by October 16, 2026, while remaining the only person who had run or configured the Architect itself. This is evidence of participant onboarding in a creator-supported deployment, rather than eight independent framework configurations. [E1]

The Hub maintained exchanges, source routes, instructions and checkpoints while the team continued assigned work. The original case examined selected operational records from October 8 through October 16. This revision also considers later technical returns and Hub maintenance through October 23. Historical quantities below retain their observation dates; they are not estimates of the current complete project.

Generic RA, the deployed NWSW coordination system and the independent NWSW Spatial Evidence Workbench are separate systems. The Workbench's web interface, database, spatial features and application tests are not capabilities or validation results of the RA distribution. This paper reports coordination and software-engineering observations without publishing the project's research findings or contributor records.

4 Operational results

File exchange and instruction continuity

The October 16 inventory recorded 98 incoming and 164 outgoing tickets with 262 unique transfer IDs. Tickets identify prepared exchanges; separate readback records support actual delivery. The October

8 repair distribution comprised 15 logical transfers and 30 remote objects. The October 13 distribution comprised 10 transfers and 20 remote files. The retained checks bound delivered objects to their intended destinations and bytes. [E1]

A complete versioned instruction was delivered through seven participant routes in October. Its register retained identity, version, supersession and observed delivery, with a subsequent report of retention and application. That report does not establish seven persistent installations. Later diagnostic returns and exported execution records strengthened evidence for participant-side setup and multipart restoration, while remaining distinct from independent observation of every device. [E1]

Continuity during engineering changes

The authorized October 13 Hub upgrade preserved and rehashed 701 exchange files, totaling approximately 1.66 GB. Its preceding exchange store and pointer remained unchanged. The post-activation exercise combined file-hash comparison with inventory checks and verified restoration records. This is a demonstrated preservation result for that upgrade, rather than a guarantee that arbitrary concurrent writers can be merged safely. [E1]

An October 15 native Windows context-repair fixture reconstructed a 466,824-character startup section through five resume parts and eight full-context parts. The largest part contained 189,188 characters under the unchanged 200,000-character ceiling. Checks included Unicode and CRLF reconstruction, repeated controls, missing or altered parts and later checkpoint restoration. These are synthetic engineering checks, separate from participant adoption. [E1]

Whole project backup and restoration

The October 11 capture covered 48 included Drive folders, 744 source files and 748 downloaded or exported artifacts, together with local project contents and dependencies. The original isolated restore verified 123,098 files totaling approximately 20.88 GB without using live sources. It materialized recorded dependencies and completed restored integrity and context checks. [E1]

A later authorized content amendment produced a separately documented backup inventory. It does not replace the historical restore result or authorize resurrection of excluded bytes. The deployment's two-copy rolling policy is project-specific; the reusable tools accept explicit retention configuration. Local backup and restore were evidenced, while actual offsite delivery was not established by the inspected capture records. [E1]

Shared Library implementation and publication recovery

The NWSW implementation established preserved holdings, a private census and evidence registers, immutable shared catalog generations, approved stored files and a pinned deployment graph. Readers follow the current designation through the deployment and relevant collection pages. This supports targeted discovery without scanning all research payloads or loading the full collection into model context. The implementation preserves prior versions and exact review bindings when registering reviewed additions and corrections. [E5]

The retained recovery completion records successful verification of the selected catalog, 58 convenience aliases and the status record, followed by guard release. Its final current-pointer observation was October 22, 2026 at 11:51 p.m. Central Daylight Time (October 23 at 04:51 UTC). Separate Hub activation completed at 12:30 a.m. CDT on October 23. These are completed, dated operational results. They establish the recorded publication and recovery outcome; contributor rollout and recipient reading remain separately tracked. [E5]

5 Engineering improvements and release verification

Field operation exposed requirements for stable state selection, reliable Windows publication, growing context and recoverable exchanges. RA 2.1.0 distribution revision 2 ports reusable mechanisms into a separate package while preserving earlier source and deployed project history.

Capabilities in the inspected RA 2.1 distribution

Capability	Implemented mechanism
Current state selection	Verified designation, identity and manifest checks; invalid selectors stop affected work.
State publication	Separate successor snapshots, destination-local staging and expected-base checks.
Context continuity	Bounded retrieval and exact multipart restoration with repeated controls.
Exchange records	Configured local staging, version-bound receipts, idempotent repeats and guarded lock recovery.
Project recovery	Resumable capture, explicit retention, dependency materialization and standalone restore tools.

The October 16 release receipt records 171 passing offline regression tests in eleven groups on Windows and Python 3.12.10, with zero failures, errors or skips. Coverage included kit generation, checkpoints, context reconstruction, local exchange, affected evidence services, extracted-package generation and rebuilding, and backup recovery. The run made no model calls or remote transfers. The earlier edition's read-only comparison found all 278 recorded source hashes unchanged. That integrity comparison is not a new regression run. [E2]

Instruction maintenance has a separate boundary. RA records stable IDs, complete versioned text, authority, applicability and explicit supersession. Routine Hub saves may append evidenced observations about an existing instruction, but cannot define or rewrite a rule. A new startup instruction requires reviewed reconfiguration and verification that the selected installation actually loads it. Delivered packages and acknowledgments alone do not establish fresh-session behavior.

The deployed Hub continued to evolve after the package freeze. An October 21 local update changed context rendering while retaining original source bytes, hashes and controls; its contributor rollout remained held. Later lightweight message-handling rules were also local operational changes. Neither change is included here as a shipped generic RA 2.1 feature or a team-wide upgrade. [E1]

RA 2.5 factory update

The current factory is RA 2.5.1, with operational runtime 2.4.0 and scientific library 1.9. These version identifiers distinguish kit preparation, operational helpers and methodological content. Generated manifests and startup text identify the delivered components. The factory includes persistent setup gates and role-specific evidence-review instructions. Existing deployments and dated measurements retain their original identities. [E3] [E6]

New RA 2.5.1 sessions use a persistent setup ledger with 43 baseline questions and additional required followups. Startup directs the Architect to inspect compact status each turn and after resume. Ordinary compilation requires recorded answers, an explicit human preparation response and approval bound to the exact configuration inputs. Deferrals remain pending; revisions preserve history and reopen affected decisions. A verified build and each operator's walkthrough are separate

completion steps. Existing protocol-1 ledgers retain their 42-item catalog and approval bindings. Human identity and the adequacy of prose answers remain outside structural validation. [E3] [E6]

The RA 2.5 revision 1 verification exercised the changed question workflow, interrupted and stale-state paths, configuration binding and the extracted package. A synthetic four-role project compiled, each generated kit passed its consistency check and actual operator walkthroughs remained pending. Three teaching-runner defects were repaired: all-failed-project handling, infeasible sensitivity shifts and bounded duplicate-safe JSON input. Earlier operational experiments were retained rather than rerun. Revision 2 changes release identification and documentation; its adjacent integrity receipt records only those changed-path checks. [E3]

The scientific collection contains 134 reference records and 38 local reference texts. Six targeted critical appraisals cover methodology, agent evaluation, failure analysis and computational reproducibility. Their relevant dependencies travel through 19 method routes; large bodies remain available on demand rather than entering routine startup. These counts describe coverage and availability, not 134 completed full-paper reviews. [E4]

The reusable Library integration introduced in RA 2.3 remains in RA 2.5.1. Every generated role receives a configurable discovery client that verifies catalog revision, hashes, byte counts and audience, preserves complete matching metadata through continuation, and prepares submission records for Hub review. The discovery client grants no write authority. Spokes and Ingestor have read-only Library access; the Hub has read/write authority and uses authorized tooling to publish additions and corrections. Earlier registration/discovery evidence is retained. Generating a kit does not install the NWSW backend or grant access to its holdings. [E3] [E5] [E6]

The opening invitation is the first required item in new protocol-2 sessions. Questions about setup remain pending until the human chooses to begin intake. Targeted compiler checks rejected 14 representative required-item omissions and preserved legacy ledgers and approvals. In a two-turn fresh-chat test using gpt-5.6-sol at low reasoning, the agent asked the invitation, explained approval and recorded a request for explanation as a deferral with zero answers. These results document early-intake behavior and structural gate enforcement; the full interview was not rerun. [E6]

6 Research basis and methodological applicability

Multi-agent design requires explicit coordination and verification. Cemri and colleagues distinguish system-design, inter-agent alignment and task-verification failures. RA uses this taxonomy to examine pending questions, task drift and incomplete completion checks. Applying the taxonomy is an engineering interpretation, not evidence that RA shares the study's failure rates or has eliminated those failure modes. [4]

AI Agents That Matter argues for cost-aware evaluation, credible simpler baselines and holdouts matched to the intended generalization. RA adopts these considerations when planning comparisons: report the full retry policy and task denominator, and distinguish emitted characters from measured tokens and billed cost. The appraisal uses the explicitly identified 2024 author edition; it does not treat later publication as evidence of a new RA experiment. [5]

CORE-Bench evaluates computational reproduction using supplied code and data. Its inspected author version and separate journal publication identity are distinguished in the references. Reproducing an expected output is a useful verification target, but it does not independently establish the truth of a study's measurements or causal interpretation. RA therefore records file integrity, execution, operator rehearsal and scientific review separately. [6]

Preregistration guidance distinguishes prospective plans from choices made after seeing outcomes. RA's preparation approval concerns kit creation, not preregistration of a study. Applicable research plans should record timing, prior outcome exposure and deviations while preserving exploratory work under an accurate label. [7]

Clustered-inference guidance explains why observations within the same project or task group cannot automatically be counted as independent evidence. RA's workflow-evaluation case distinguishes all-attempt outcomes from completed-pair diagnostics; statistical inference must respect the design's independent units and few-cluster limits. The teaching case is an application of methodological principles, not a new empirical validation of them. [8]

Leakage analysis requires separation through preprocessing and evaluation, legitimate predictors and a test distribution that matches the scientific claim. RA's analysis-selection guidance carries these checks into model comparison. Nested selection or a held-out split does not repair inappropriate measurements or an unsupported target-population claim. [9]

FAIR principles emphasize identifiable, described and reusable research objects; practical scientific-computing guidance supports preserving raw inputs, processing records and change history. These sources inform RA's provenance and handoff design. RA's actual preservation and restore results are supported by its retained deployment receipts, not inferred from citing those principles. [10] [11] [E1]

7 Discussion and next phase

RA has supported continuing work across people, sessions and files. Role kits supplied assignments and governing context, checkpoints retained decisions and unresolved work, and verified exchanges made distribution traceable. The isolated restore established a recovery path. Operational defects supplied reproducible cases for the reusable package.

Scope and assurance

Evidence includes creator statements, execution receipts, synthetic software checks and recipient reports. Later diagnostics and inspected exports strengthen specific execution histories, while participant adoption remains unevenly evidenced. Reports of successful save, reload or refresh support their observed scope; they do not establish that stale state or lost context has been eliminated.

File consistency does not authenticate authors or certify scientific validity. Human decisions remain distinct from technical checks, and local accounts and host configuration remain trust boundaries. Folder visibility alone does not establish research-use permission. Locks and selection checks do not form one transaction across uploads, designation and unrelated writers; cutover needs an idle window and reconciliation.

Late-stage onboarding of participants and agents

Late-stage onboarding places separate demands on a new participant and their newly generated agent. The person must learn the project, while the agent must reconstruct the relevant decisions, terminology, evidence, dependencies and unresolved work. An experienced participant introducing a fresh agent still faces the agent's context gap. A role kit can contain supplied project context, but generating it does not automatically transfer the established team's accumulated working understanding.

This is a limitation of context transfer and assimilation in the AI technology on which RA depends. Shared Library access makes retained information available; it does not by itself establish that a new agent has selected, read, reconciled and understood the material needed for its assignment. While onboarding proceeds, the project continues producing and revising context. If relevant changes accumulate faster than the person and agent can assimilate them, a persistent catch-up backlog can develop. Loading more records is not equivalent to establishing current, usable understanding.

The lead and existing team must then supply explanations, identify authoritative records, resolve misunderstandings and verify the new pair's work. Existing agents may also spend context and inference resources assisting the newcomer. This diverts attention from established workstreams, can slow the team and can make late expansion impractical within the available time and cost budget. Adding a kit should therefore not be assumed to increase useful capacity. The severity depends on the role, project pace and completeness of retained reasoning; this is a technology and workflow limitation, not a measured claim that every late entrant can never become ready. Checkpoint restoration of an established workstream remains distinct from onboarding a new participant and agent.

Context and performance evaluation

Bounded retrieval and durable checkpoints provide mechanisms for limiting working context. Their net benefit must be measured over complete tasks, including initialization, tool results, checkpoint creation, restoration, retries and failures. Exploratory runtime diagnostics showed reducible prompt overhead, but an incomplete lean-context recovery pilot did not establish completed-task savings. This paper makes no comparative productivity, token-cost or research-quality claim. Cost and holdout considerations for future comparisons follow the cited evaluation literature. [5] [9]

Broader adoption

The next milestone is another project lead configuring a new team with documented support requirements. Existing-project adoption needs preserved state, a separate candidate, compatibility checks and deliberate cutover. Recipient tests must identify loaded startup guidance, selected checkpoint, complete restoration and behavior in fresh and resumed sessions. General automatic upgrades have not been established.

The historical RA 2.1 case and current RA 2.5.1 factory are development previews. Additional-lead adoption and broader platform evaluation remain distinct from implemented local setup, Library-client and source-retrieval capabilities. Deployment claims remain tied to their own receipts and dates. [E1] [E3] [E6]

8 Conclusion

Research Architect has supported a creator-configured team with verified exchanges, preserved history and whole-project recovery. Field experience informed tested improvements in RA 2.1. Later returns strengthened selected continuity evidence while adoption remained unevenly evidenced. The framework provides a reusable, human-supervised operating structure with traceable engineering results. Its next phase is repeatable deployment by additional project leads.

Visual guide from evidence to research design

RA draws on two complementary inputs. Published methodology explains how a design can support a claim; project evidence supplies the observations to which that design will apply. The Architect must assess their fit before selecting guidance for a kit. The compiler packages the resulting selection. It does not independently choose a scientifically valid study. [E3] [E4]

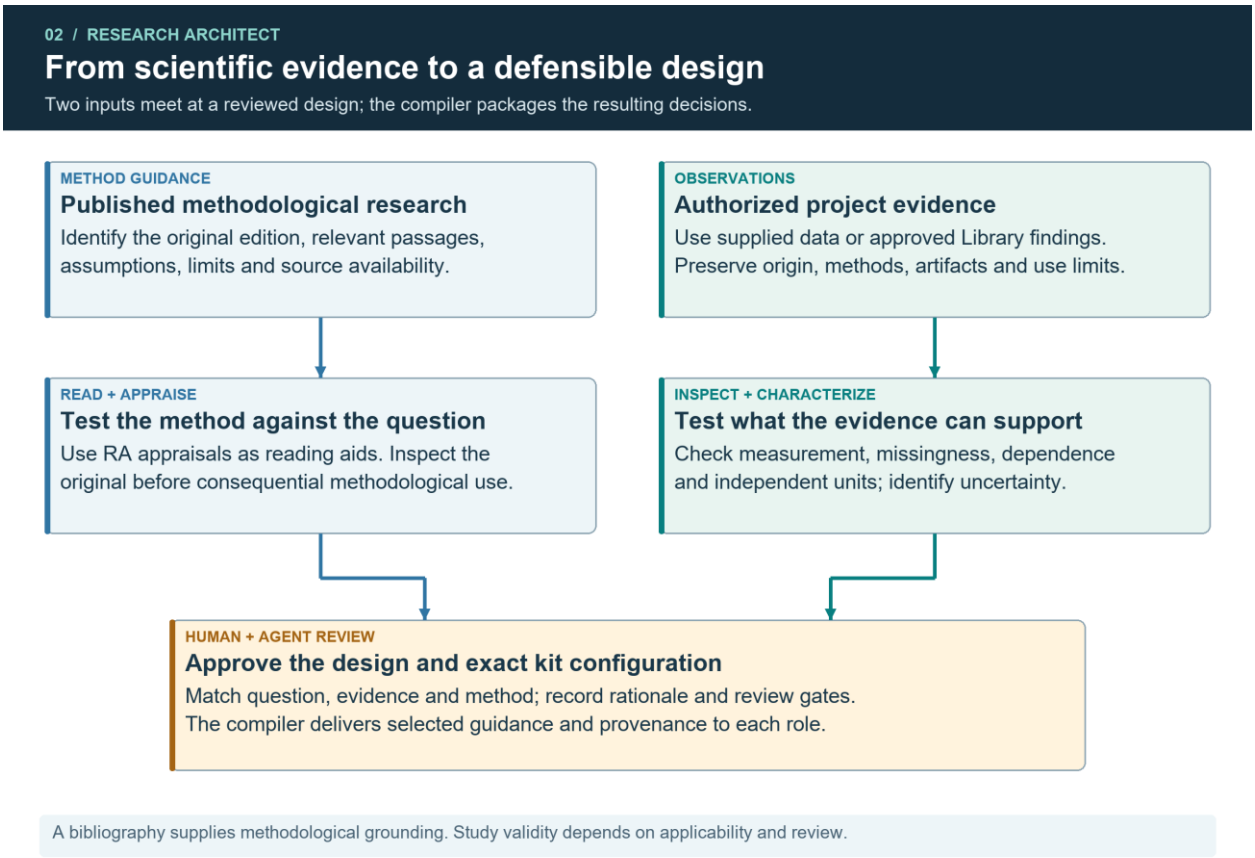


Figure 2 Published research and project evidence inform a reviewed design. Arrows show the intended reasoning and configuration flow, including scientific judgments that require agent and human review.

The scientific registry records source identities and availability. Local text is supplied where the retained collection permits it; other records point to an external original. Project data must be supplied or obtained through authorized project workflows. RA does not turn a bibliography into a dataset or treat technical integrity checks as scientific approval. The design should identify the question, independent units, measurement limits and relevant assumptions before a method is accepted. [8] [9] [10]

Visual guide tracing a cited method into a kit

Consider an illustrative evaluation with repeated task results within projects. The statistical guidance directs attention to dependence and independent units. Cameron and Miller provides relevant methodological grounding; the retained CLUSTER2015 appraisal identifies the original sections inspected and the limits of applying their guidance. This example explains a source route, not a newly conducted experiment. [8] [E4]

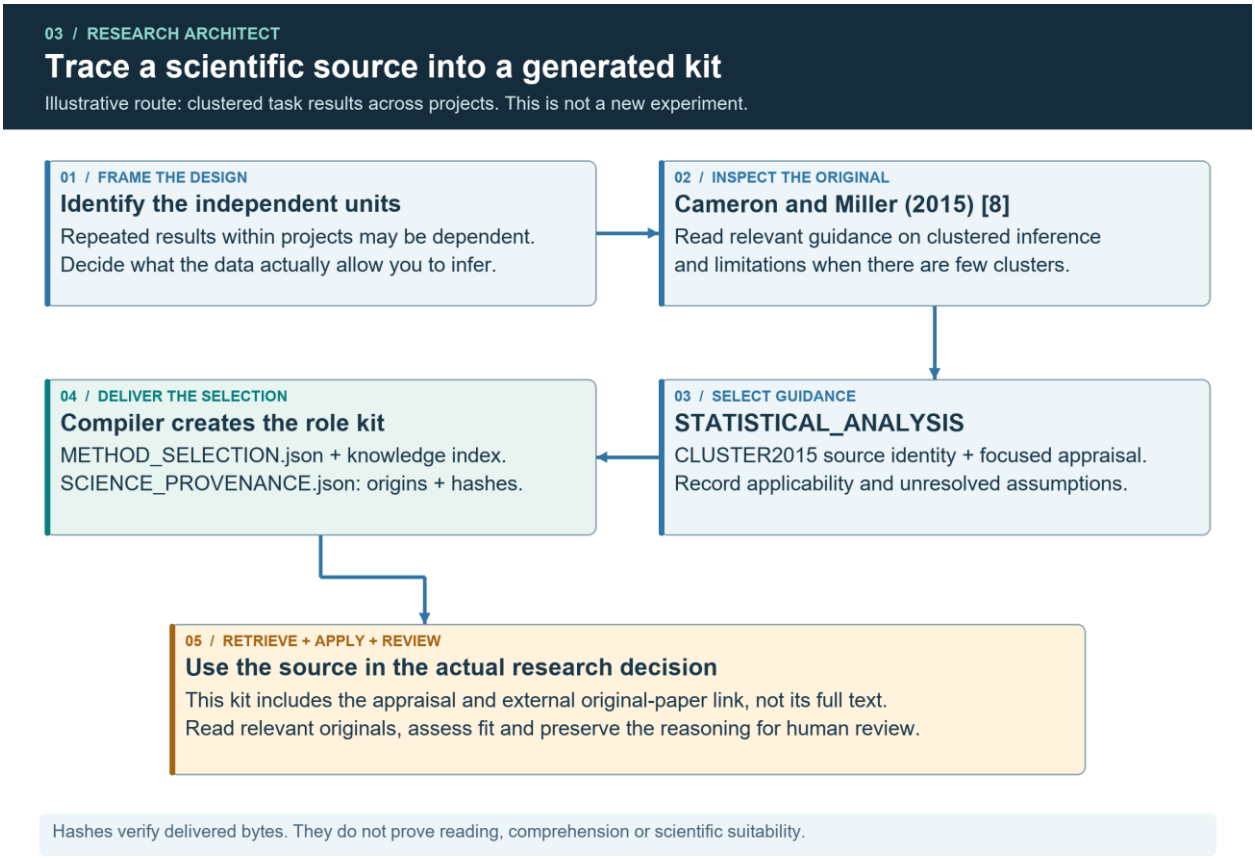


Figure 3 The STATISTICAL_ANALYSIS route includes the CLUSTER2015 source record and focused appraisal. The compiler carries selected guidance, a filtered index and provenance into generated kits. [E3] [E4]

For this source, the kit carries bibliographic metadata, an original-paper link and an RA-authored appraisal; it does not contain the full original paper. Other selected sources may have local full text. The knowledge reader supports targeted retrieval of local material, while consequential use requires inspection of the relevant original passages. Hashes establish which bytes were delivered. They do not establish that a model read the material or that clustered inference is suitable for the particular study. [8] [E4]

Visual guide questions and continuity

RA stores setup progress in a persistent ledger. At the start of a turn or a resumed conversation, compact status identifies the next required item. A clarification request is part of the conversation; it is not an answer to the setup requirement. An actual response can be recorded, while a deferral remains pending. The same record supports continuation in a fresh chat. [E3]

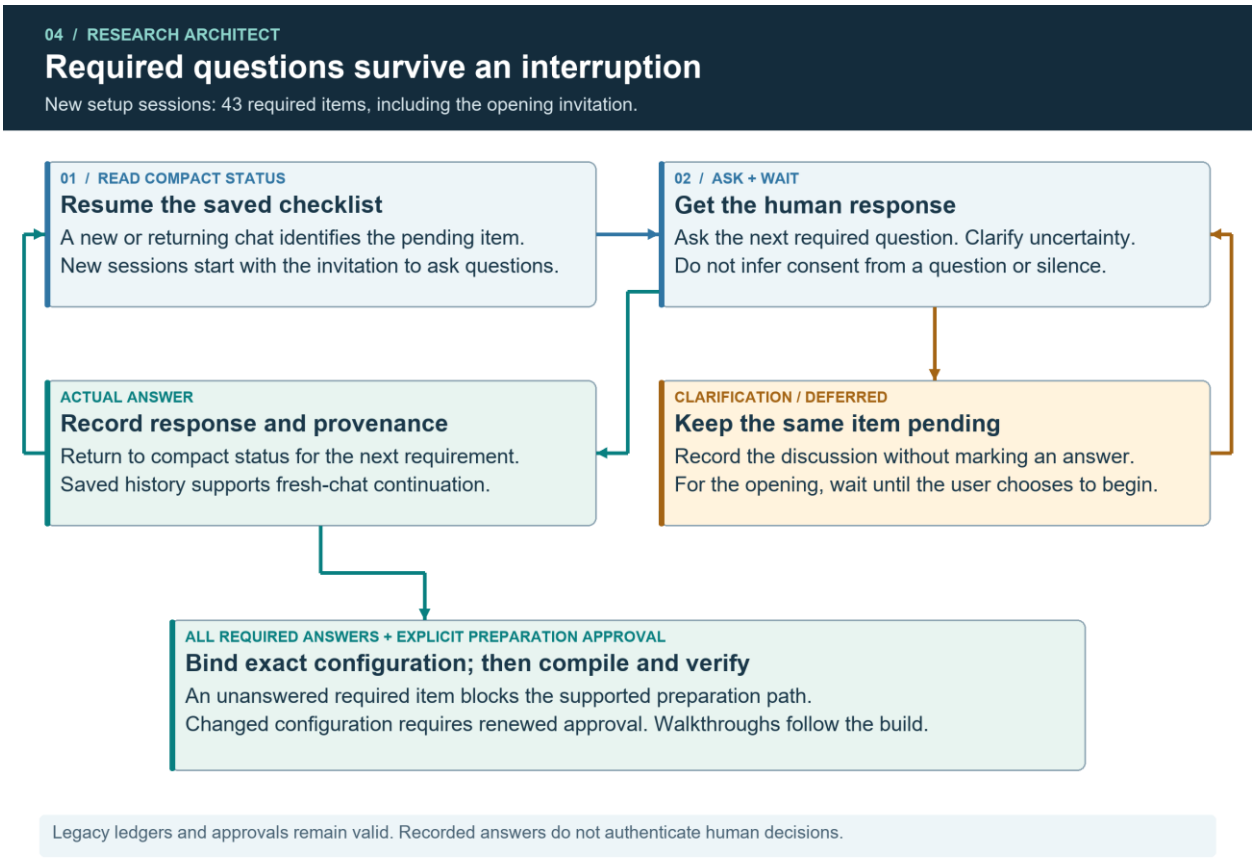


Figure 4 Required questions and saved continuity. New sessions include the opening invitation. Clarifications remain pending; actual answers advance the checklist. Completed requirements and exact configuration-bound preparation approval permit supported compilation. Legacy ledgers are preserved. [E6]

Preparation approval is bound to the exact configuration inputs. Generation, verified build completion and operator walkthroughs are separate stages. These gates supply durable state and enforce supported compilation prerequisites; they do not guarantee that every model will follow every conversational instruction. The accompanying scoped behavior report records the observed clarification and fresh-chat trial separately from earlier software tests. No model-cost reduction or complete onboarding result is inferred from the diagram. [E3]

Visual guide sharing and reusing Library evidence

The Hub issues a bounded task; a Spoke performs it and obtains its human's approval. The Hub reviews and accepts the contribution for Ingestor validation and any needed reproduction. The Ingestor reports back, the Hub obtains final approval, and only the Hub publishes the approved finding. The Hub retains read/write access and alone publishes later corrections after the required reviews. Spokes and Ingestor discover and read approved evidence through read-only access. Figure 5 shows the required sequence. [E6]

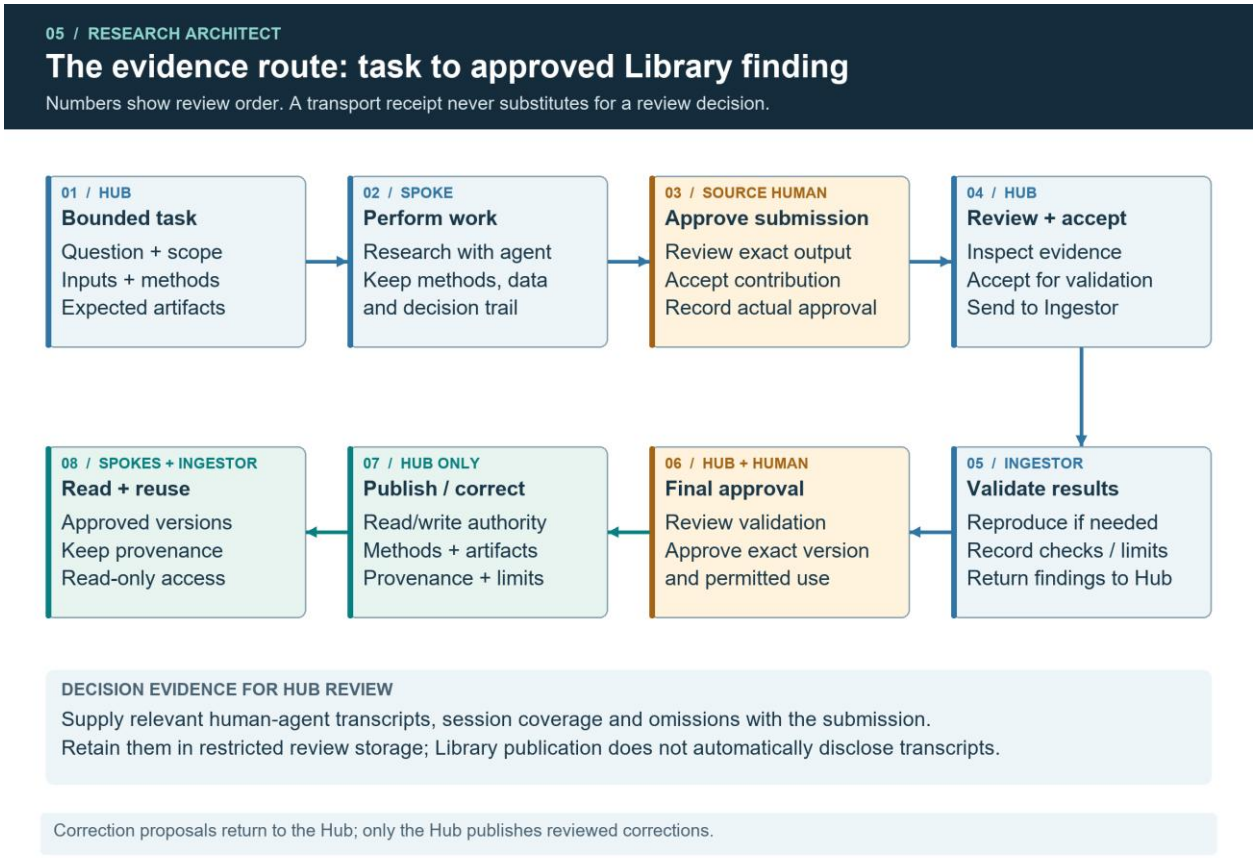


Figure 5 Task, review, validation and Hub-only publication. The Hub has read/write authority and alone publishes additions and corrections; Spokes and Ingestor have read-only access. Human submission approval and final approval are separate decisions. Methods, artifacts, provenance and limits accompany the published finding. Conversation evidence supports restricted Hub review. [E6]

The Hub's authorized publication tooling verifies immutable catalog files and deployment bindings before selecting CURRENT and reconciling convenience aliases. Writer guards, expected prior state and retained receipts support interrupted-operation recovery. Only the Hub applies Library changes through this tooling; other roles submit proposed corrections to the Hub. The review sequence governs kit instructions; existing tools enforce their own checks rather than one automatic end-to-end approval engine. A flowchart does not change storage permissions or authenticate human decisions. [E5] [E6]

References

[1] OpenAI. (n.d.). A practical guide to building agents. OpenAI. Technical guide. Accessed October 23 2026.

[2] Wu Q, et al. (2024). AutoGen: Enabling Next-Gen LLM Applications via Multi-Agent Conversations. COLM 2024. Peer-reviewed conference paper. Accessed October 23 2026.

[3] Anthropic. (2025). How we built our multi-agent research system. Anthropic Engineering, June 13. Engineering report. Accessed October 23 2026.

[4] Cemri M, et al. (2025). Why Do Multi-Agent LLM Systems Fail?. NeurIPS 2025 Datasets and Benchmarks. peer-reviewed conference paper. DOI: 10.52202/085713-4082. Accessed October 23 2026.

[5] Kapoor S, Stroebl B, Siegel ZS, Nadgir N, Narayanan A. (2024). AI Agents That Matter. arXiv:2407.01502v1. Inspected author preprint; later journal publication in TMLR 2025. Published record: https://openreview.net/pdf?id=Zy4uFzMviZ. Accessed October 23 2026.

[6] Siegel ZS, Kapoor S, Nadgir N, Stroebl B, Narayanan A. (2026). CORE-Bench: Fostering the Credibility of Published Research Through a Computational Reproducibility Agent Benchmark. arXiv:2409.11363v2, revised June 22 2026. Inspected author version; published journal record in TMLR 2025. Published record: https://openreview.net/pdf?id=BsMMc4MEGS. Accessed October 23 2026.

[7] Nosek BA, Ebersole CR, DeHaven AC, Mellor DT. (2018). The preregistration revolution. Proceedings of the National Academy of Sciences of the United States of America. published journal article. DOI: 10.1073/pnas.1708274114. Accessed October 23 2026.

[8] Cameron AC, Miller DL. (2015). A Practitioner's Guide to Cluster-Robust Inference. Journal of Human Resources. published journal methodological article. DOI: 10.3368/jhr.50.2.317. Accessed October 23 2026.

[9] Kapoor S, Narayanan A. (2023). Leakage and the reproducibility crisis in machine-learning-based science. Patterns (New York, N.Y.). published journal article. DOI: 10.1016/j.patter.2023.100804. Accessed October 23 2026.

[10] Wilkinson MD, et al. (2016). The FAIR Guiding Principles for scientific data management and stewardship. Scientific data. published journal article. DOI: 10.1038/sdata.2016.18. Accessed October 23 2026.

[11] Wilson G, Bryan J, Cranston K, Kitzes J, Nederbragt L, Teal TK. (2017). Good enough practices in scientific computing. PLoS computational biology. published journal article. DOI: 10.1371/journal.pcbi.1005510. Accessed October 23 2026.

Primary RA evidence records

[E1] Santor B. NWSW operational case evidence register, October 8-22 2026. Retained private creator report, transfer inventories and readbacks, upgrade-preservation records, context fixtures and isolated-restore receipts. Reviewed locators and hashes are held in the editorial evidence manifest. These are primary project records, not independent peer-reviewed findings.

[E2] Santor B. Research Architect 2.1.0 distribution revision 2 release verification, October 16 2026. Retained offline regression and package-verification receipts: 171 tests; no model calls or remote transfers. The earlier editorial integrity comparison is retained without a new regression run.

[E3] Santor B. Research Architect 2.5.0 release notes and changed-path verification, October 23 2026. Distribution revision 1 records the new setup gate, runner repairs and extracted four-role project checks. Distribution revision 2 records release-label and citation changes. Exact archive identities and verification scopes accompany each release in its integrity receipt.

[E4] Santor B. Research Architect scientific library 1.9 source registry and six critical applicability appraisals, October 23 2026. Records source identity, actual inspected edition/sections and application limits. RA-authored synthesis is separate from the original publications.

[E5] Santor B. NWSW shared Library implementation, verified publication recovery and RA client integration records, October 22-23 2026. Maintained implementation manifest R2; recovered Library completion protocol 3; separate Hub activation receipt; and retained RA client registration/discovery test. The Library completion binds CURRENT, 58 aliases and the status record. These are primary engineering and operational records; local integration tests and deployed recovery are distinguished. Exact source hashes and private locators are retained in the editorial evidence manifest.

[E6] Santor B. Research Architect 2.5.1 implementation and verification records, October 23 2026. Versioned setup-workflow source and generated Hub, Spoke and Ingestor instructions; evidence-review and Library-client documentation; transcript-export implementation; retained compiler-omission, legacy-preservation and three-role delivery checks; and a recorded two-turn gpt-5.6-sol low-reasoning intake test. Source inspection establishes implemented controls and supplied instructions; test receipts establish the specific behaviors exercised. These records are distinct from the dated NWSW deployment evidence. File identities and verification scopes are retained with the release.

Evidence availability

The operational case draws on retained private deployment records and dated software-validation receipts. This public edition reports aggregate engineering observations and does not include participant records or research findings. Detailed source locators, hashes, evidence classifications and revision decisions are retained separately for editorial review. The published references above provide scholarly and engineering context; they do not independently validate the RA case.

Reading the engineering evidence

The numerical results belong to their stated dates and work units. Transfer identities count recorded exchanges rather than completed research tasks. The isolated restore is one recovery exercise, and the large context fixture is one synthetic engineering case. The release regression covers the named software scope. These observations should not be pooled into an adoption rate or treated as independent demonstrations of research quality.

Further evaluation should freeze the task, authorized evidence, runtime configuration, stopping rules and grading criteria before execution. Full-context, bounded-retrieval and checkpoint strategies should face the same task and evidence. Accounting should include failed attempts and restoration work, preserve missing counters as unknown, and assess citations, uncertainty and unauthorized actions alongside completion. This is an evaluation plan; it is not an additional result of this paper. [5] [8] [9]

Prepared with AI-assisted source review and drafting. The author configured the deployment and supplied the dated onboarding report. File verification, AI review, recipient reporting and independent human evaluation are distinguished throughout.