



a Optical model and its discrete transpose

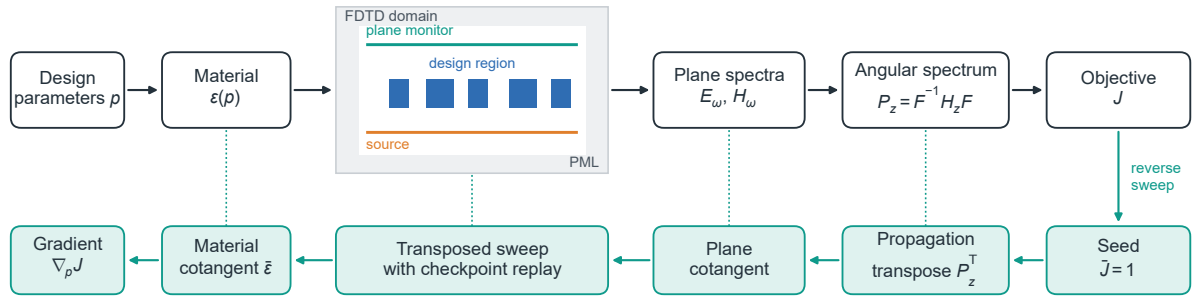


Every forward kernel has a hand-written transpose. The reverse row is the discrete adjoint of the row above it.

b Host-streamed sweep over causal slabs

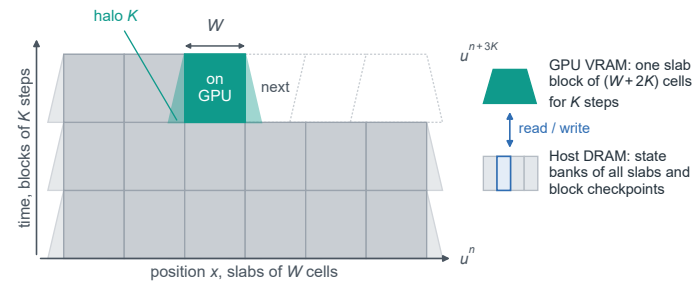

Slabs advance one block at a time, left to right. The device holds one slab and the full-domain discrete problem is unchanged.

c Independent lateral tiles

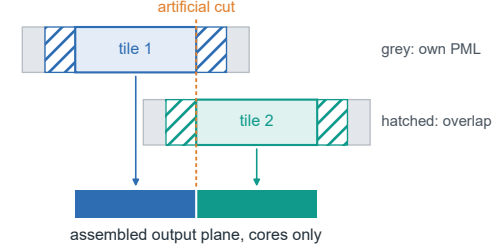

Each tile is solved on its own, so coupling across the cut is lost. The error against the full domain is measured in Fig. 4.