





# Introduction to PDC

Centre for high performance computing
Arash Alizad Banaei/PDC



#### What is PDC?

- A supercomputing centre founded in 1990
  - SNIC centre(SNIC > Swedish National Infrastructure for Computing)
  - Under administration of School of Electrical Engineering and Computer Science (EECS) at KTH
- Providing high performance computing (HPC) services for academic and business/industrial research.
  - Services include HPC systems for performing computations and simulations
    (as well as pre- and post-processing of data), short- and long-term data
    storage, and assistance from application and systems experts



## **HPC Systems**

#### • Beskow:

- Cray XC40 system
- Intel Haswell and Broadwell processors
- Designed for running large parallel jobs

#### Tegner

- Pre and post processing system for Beskow
- Intel CPUs + NVIDIA Tesla GPUs
- 24 cores per node
- Has large memory nodes: 0.5-1-2 TB
- Will be used for OpenFOAM training

#### Dardel

- New system of PDC arrived a few months ago!
- Dual AMD EPYC<sup>™</sup> 2.25 GHz 64 core processor
- AMD Instinct™ MI200 GPUs







# Dardel Compute nodes

Number of nodes	RAM (GB)	Name
488	256	Thin
20	512	Large
8	1024	Huge
2	2048	Giant
36	256	Business



# Getting started with Tegner

How to login: two step login using Kerberos ticket



Kinit —f <username>@NADA.KTH.SE ssh —X <username>@tegner.pdc.kth.se



# Getting started with Tegner How to login

- Apply for a PDC account!
  - https://pdc-web.eecs.kth.se/accounts/
  - Receive your password by SMS
- Follow steps in:

https://www.pdc.kth.se/support/documents/login/login.html#step-by-step-login-tutorial

Contact PDC support in case of login issues:

support@pdc.kth.se



#### OpenFOAM on Tegner

 Once logged in, you will be on your home directory: /afs/pdc.kth.se/home/<letter>/<username>

```
[[arash2@tegner-login-1 ~]$ pwd
/afs/pdc.kth.se/home/a/arash2
[arash2@tegner-login-1 ~]$
```

All the operations will be performed on your home directory

- All the software on Tegner are available through modules
- You need to load a module to your environment to access it



#### OpenFOAM on Tegner

Run 'module avail openfoam' to see which versions are available:

```
[[arash2@tegner-login-1 ~]$ module avail openfoam

-------/pdc/modules/system/base
openfoam/1612+ openfoam/1712 openfoam/1812 openfoam/2.3.1 openfoam/5.0 openfoam/7
openfoam/1706 openfoam/1806 openfoam/1912 openfoam/4.1 openfoam/6
```

- Run 'module load openfoam/1912'
- Run 'module list' to see the loaded modules and make sure OpenFOAM is loaded:



#### OpenFOAM on Tegner


- Now you have access to OpenFOAM on Dardel!
- You need to run a script to set some environment variables and paths for OpenFOAM:
- . \$FOAM\_BASHRC
- Copy OpenFOAM tutorials to your home directory:

Now You're ready for the analysis! You have Necessary files on your home directory

\$ cp -r \$WM\_PROJECT\_DIR/tutorials .

ou are already on the 'login node' and do not have access to the compute resources. You need to request a compute node:

• Request a compute node using 'salloc' command

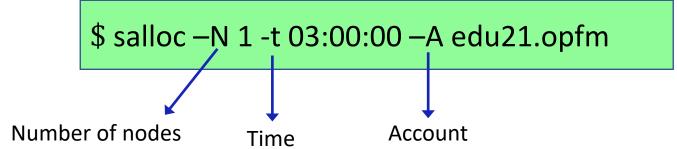


15 nodes are reserved for this course. Each compute node has 24 cores

 You should see Something like this once you're granted a compute node:

```
salloc: Pending job allocation 63554 salloc: job 63554 queued and waiting for resources salloc: job 63554 has been allocated resources salloc: Granted job allocation 63554
```



• To run your job you use <a href="mailto:srun">srun</a> command:

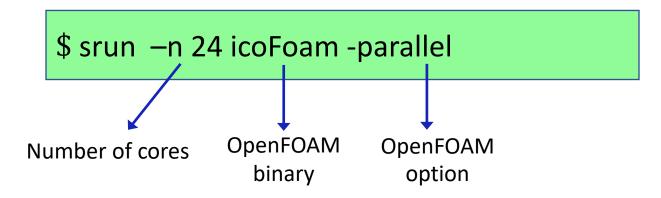

• Important note: You should always use 'srun' command to run your job otherwise it will run on the login node and makes troubles for the system.



Jobs can also be submitted through a batch script:

```
#!/bin/bash
#SBATCH -J mytest
#SBATCH -t 1:00:00
#SBATCH -A edu21.opfm
#SBATCH --nodes=1
module load openfoam/1912
. $FOAM_BASHRC
srun -n 24 icoFoam -parallel > my_output_file 2>&1
```

Submit with 'sbatch' command'

```
$sbatch <name of the script>
```



Use 'squeue' command to see your job status

```
$squeue -u <username>
```

The output will look like this:

```
JOBID PARTITION NAME USER ST TIME NODES NODELIST(REASON)
1059071 main my_job arash2 R 0:08 1 t02n01
```

• Use 'scancel' command to cancel your job

```
$scancel <job-ID>
```



## Good luck with the computations!