

Tutorial 02

ENVX2001 – Applied Statistical Methods

Januar Harianto

Semester 1, 2024

Table of contents

Welcome	3
Getting started	3
1 Sampling finite populations	4
1.1 Finite populations	4
1.1.1 Random, but reproducible	4
1.1.2 Identifying the population	5
1.1.3 Simple random sampling	5
1.2 Bonus	6
1.3 pipe approach	6
1.4 Nested approach	6
1.5 Stepped approach	7
1.6 Practice	8
1.7 base R	8
1.8 dplyr approach	8
1.9 base R	8
1.10 dplyr approach	9
1.11 Next	9
2 Sampling infinite populations	10
2.1 Infinite populations	10
2.1.1 Uniform distribution	10
2.1.2 Exploring the data frame	11
2.1.3 Visualising the data	12
2.2 Base R plot	13
2.3 ggplot2	14
2.4 Practice	15
3 Done!	16
3.0.1 Thanks!	16

Welcome

Welcome to Tutorial 2. In this tutorial we will show you how to:

1. Take a random sample from a *finite* population; and
2. take a random sample from an *infinite* population.

Getting started

- These tutorials are designed to be comprehensive yet accessible. I recommend following along and grasping the statistical concepts as much as you can.
- You will need to **create your own Quarto (recommended) or R Markdown document** to complete the exercises. In RStudio, go to
 - File -> New File -> Quarto Document... or
 - File -> New File -> R Markdown... and follow the intuitive prompts.
- **For those of you who are interested in furthering your data science skills and are keen to learn more**, I have included *optional* sections. These techniques are *not* necessary for you to get through ENVX2001 – **we do not cover code in the exams**. Nevertheless these skills come handy in report writing and data analysis and can be a great addition to your projects.
- If you have any suggestions for improvement, please let me know! Send me an email (you can find my details on Canvas).

In some instances you will see notes like this one in the margin, which often contain useful tips or reminders.

Click on the topics on the left to get started.

1 Sampling finite populations

There are 2 types of populations from which we may wish to take a random sample; finite and infinite populations.

- **Finite populations** are made of discrete objects like households, people, farms etc.
- **Infinite populations** are continuous, such as soil, water in a stream.

1.1 Finite populations

Imagine a hypothetical situation where we know there are 100 farms in a catchment, and we wish to survey 10 of them about their management practices. To ensure *unbiased* results, the 10 farms should be randomly selected.

R can do this for us quite easily.

Below is the full code to randomly select 10 farms from the 100 in the catchment. We will break it down step by step.

```
set.seed(1038)
farms <- 1:100
sample(x = farms, size = 100)
```

1.1.1 Random, but reproducible

```
set.seed(1038)
```

The `set.seed()` function is used to “fix the [seed](#)” of the random number generator. This is useful when you want to ensure that

the random numbers generated are the same each time you run the code, which is useful for reproducibility. We don't want to randomly select 10 farms, and then run the code again and get a different set of 10 farms!

The number in the brackets can be any number you choose¹.

¹ It is good practice to be as unbiased as possible when picking a number for `set.seed()`. A good choice is the 4 digits for the current time of the day.

1.1.2 Identifying the population

```
farms <- 1:100
```

If there are 100 farms, then we need to be able to select *from* them. This ensures that each farm is unique so that we can perform random sampling without replacement (i.e. we should not be sampling the same farm twice).

The colon operator (`:`) creates a sequence of numbers from the first number to the second number. For 100 farms we can create a sequence of numbers from 1 to 100 easily using this operator, and assign it to the object `farms`.

1.1.3 Simple random sampling

```
sites <- sample(x = farms, size = 10)
```

The `sample()` function is a base R function – part of the core R language – and is used to take a random sample of a specified size from a set of values.

To use the `sample()` function, you need to specify the following arguments:

- **x**: the set of values from which to sample. In this case, the set of farms.
- **size**: the number of values to sample. In this case, 10 farms.

Using `:` is arguably much easier than typing out all the numbers from 1 to 100.

Notice that no result is printed to the console when you assign (`<-`) something to an object like `sites`. This is because R is not being asked to print anything, and so unless the function itself prints something, nothing will be presented to you. You can print the result by typing `sites` again in a new line, which instructs R to print the value of `sites`.

The `sample()` function returns a vector of the randomly selected farms, which we have assigned to the object `sites`.

We now have our random sample of 10 farms from the 100 in the catchment.

```
sites
```

```
[1] 92 27 78 54 48 44 61 66 4 83
```

If you have set the same seed as we have, you should get the same results, which makes your experimental design reproducible.

1.2 Bonus

A tidyverse approach to the same problem would be to use the `dplyr` package to create a sequence of numbers from 1 to 100, and then use the `sample_n()` function from the `dplyr` package to take a random sample of 10 farms from the 100 in the catchment.

The action can be performed using pipes (`|>`) to pass the result of one function to the next function, which makes the code easier to read and understand (this is an opinion shared by many).

1.3 pipe approach

```
library(dplyr)
sites <-
  tibble(farm = 1:100) |> # create a tibble of 100 farms, and...
  # ...pass it to the next function:
  sample_n(10) # take a random sample of 10 farms
```

1.4 Nested approach

```
library(dplyr)
sites <- sample_n(tibble(farm = 1:100), 10)
```

1.5 Stepped approach

```
library(dplyr)

farms <- tibble(farm = 1:100)
sites <- sample_n(farms, 10)
```

The `tibble()` function is used to create a tibble, which is a modern version of a data frame. The `sample_n()` function is used to take a random sample of a specified size from a tibble.

```
sites
```

```
# A tibble: 10 x 1
  farm
  <int>
1    14
2    41
3    96
4    73
5    25
6    88
7    40
8    32
9    39
10   21
```

Unlike `sample()`, `sample_n()` returns a tibble object which shows data in a column rather than row. It may look cluttered with a single variable but it is useful for working with data in the tidyverse, especially when you have multiple variables.

Piping is a powerful feature of the tidyverse in R and is common in other programming languages. Here, the `|>` operator is used to pass the result of the `tibble()` function to the `sample_n()` function.

Without piping, we would either have to nest the functions, or assign the result of the first function to an object and then pass that object in a stepped approach, which generates redundant “intermediate” objects before the final result is obtained.

1.6 Practice

Use this section to practice taking random samples from finite populations. Code is provided, but hidden by default for you to make comparisons with your own. Click on the “Show the code” button to reveal the code.

1. Create a random sample of 15 cats from a population of 300 cats.

1.7 base R

```
set.seed(1202)
cats <- 1:300
subjects <- sample(x = cats, size = 15)
```

1.8 dplyr approach

```
set.seed(1202)
subjects <-
  tibble(cat = 1:300) |>
  sample_n(15)
```

2. Create a random sample of 20 trees from a population of 500 trees.

1.9 base R

```
set.seed(1204)
trees <- 1:500
subjects <- sample(x = trees, size = 20)
```


1.10 dplyr approach

```
set.seed(1204)
subjects <-
  tibble(tree = 1:500) |>
  sample_n(20)
```

1.11 Next

When you are ready, go to the next section to learn about sampling from infinite populations.

2 Sampling infinite populations

There are 2 types of populations from which we may wish to take a random sample; finite and infinite populations.

- **Finite populations** are made of discrete objects like households, people, farms etc.
- **Infinite populations** are continuous, such as soil, water in a stream.

2.1 Infinite populations

With infinite populations, we deal with continuous variables which the function `sample()` cannot handle as it is designed to work with discrete variables only (whole numbers).

2.1.1 Uniform distribution

Imagine we are interested in estimating the mean of a measurement, spatially, across a study area. In this case we need to randomly choose a spatial location which is defined by a spatial coordinate, x and y, and the chance of choosing any location is equal. This is a **uniform distribution**.

Assuming a *hypothetical* study site 100m wide and 100m long where we wish to choose 10 random locations, then we may use the technique below to randomly select 10 locations based on x and y coordinates:

```
set.seed(1209)
xcoord <- runif(n = 10, min = 0, max = 100)
ycoord <- runif(n = 10, min = 0, max = 100)

sites_xy <- data.frame(xcoord, ycoord)
```

The `runif` function generates random numbers from a uniform distribution, which means that **each number is equally likely to be chosen**.

The 3 main arguments (inputs) are:

1. `x`: the number of samples,
2. `min`: the minimum value we want in our random numbers
3. `max`: the maximum value we want in our random numbers

As we can see, with two variables (`x` and `y`) we now use a data frame to store the information.

Use `?runif` to learn more about the `runif()` function.

```
sites_xy
```

	xcoord	ycoord
1	29.14598	5.810736
2	48.35873	86.962687
3	99.50902	60.200064
4	17.75811	83.790473
5	24.95613	81.485062
6	20.90561	48.077787
7	91.04788	6.096274
8	30.24953	9.560046
9	83.37310	36.851027
10	85.06082	80.864236

2.1.2 Exploring the data frame

Viewing the data frame can eventually become clunky, and this is even more so when we have more than 2 variables. Use the `head()` or `str()` functions to view the first few rows or the structure of the data frame, respectively.

```
head(sites_xy)
```

	xcoord	ycoord
1	29.14598	5.810736
2	48.35873	86.962687
3	99.50902	60.200064

```
4 17.75811 83.790473
5 24.95613 81.485062
6 20.90561 48.077787
```

Using `head()` shortens the output to the first few rows, which helps a lot when the data frame is large (you don't want to see all the rows at once since the maximum number of rows that can be displayed is 1000).

```
str(sites_xy)
```

```
'data.frame':  10 obs. of  2 variables:
 $ xcoord: num  29.1 48.4 99.5 17.8 25 ...
 $ ycoord: num  5.81 86.96 60.2 83.79 81.49 ...
```

The `str()` function provides a concise summary of the structure of the data frame. It tells us the number of observations and variables, and the type of each variable. This function is probably the most used exploratory function in R.

Bonus: The `glimpse()` function from the `dplyr` package is a more modern and user-friendly version of `str()`, and works with both data frames and tibbles. It is especially useful when working with large data frames.

```
dplyr::glimpse(sites_xy)
```

```
Rows: 10
Columns: 2
$ xcoord <dbl> 29.14598, 48.35873, 99.50902, 17.75811, 24.95613, 20.90561, 91.~
$ ycoord <dbl> 5.810736, 86.962687, 60.200064, 83.790473, 81.485062, 48.077787~
```

2.1.3 Visualising the data

After generating the random points, it is always a good idea to visualise them to see if there are issues with the random points. This is especially important when working with spatial data –

Notice the `::` operator in the `glimpse()` function. This is used to access functions from a package without loading the entire package. We basically interpret this as: “use the `glimpse()` function from the `dplyr` package.” Note that the package must be installed for this to work and you also need to know in advance that the function `glimpse()` is available in the package `dplyr`.


in rare cases, the random points may cluster in one area, which is not ideal for a random sample.

We can use the `plot()` function to visualise the points, or we can use the `ggplot2` package. With enough effort, both methods can produce the same plot, but `ggplot2` is more flexible as it follows the grammar of graphics². My recommendation is that you learn `ggplot2` as it is more powerful and flexible. **A good idea in this case is to plot in base R first, and then asking GenAI to plot the same plot using `ggplot2`.**

² The [grammar of graphics](#) is a system for understanding and building graphs by combining components, such as data, scales, and layers, in a consistent and structured way.

2.2 Base R plot


```
plot(sites_xy,  
     pch = 19,  
     col = "blue",  
     main = "Random points",  
     xlab = "X coordinate",  
     ylab = "Y coordinate"  
)
```

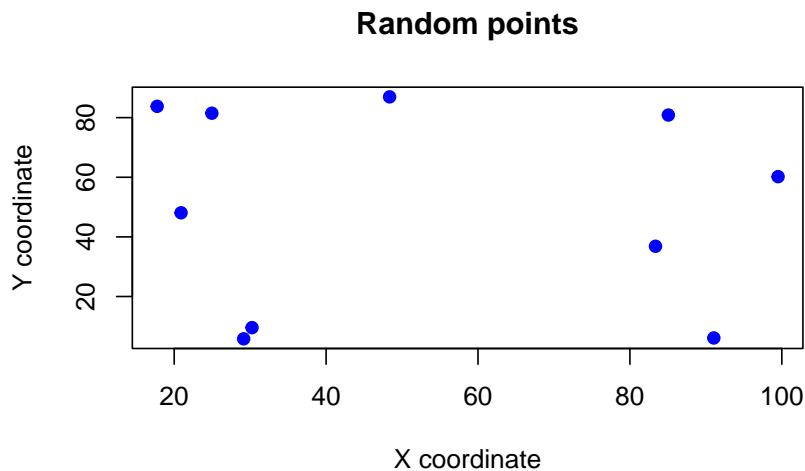

2.3 ggplot2

```
library(ggplot2)

ggplot(
  data = sites_xy,
  aes(x = xcoord, y = ycoord)
) +
  geom_point() +
  labs(
    title = "Random points",
    x = "X coordinate",
    y = "Y coordinate"
  ) +
  theme_bw()
```

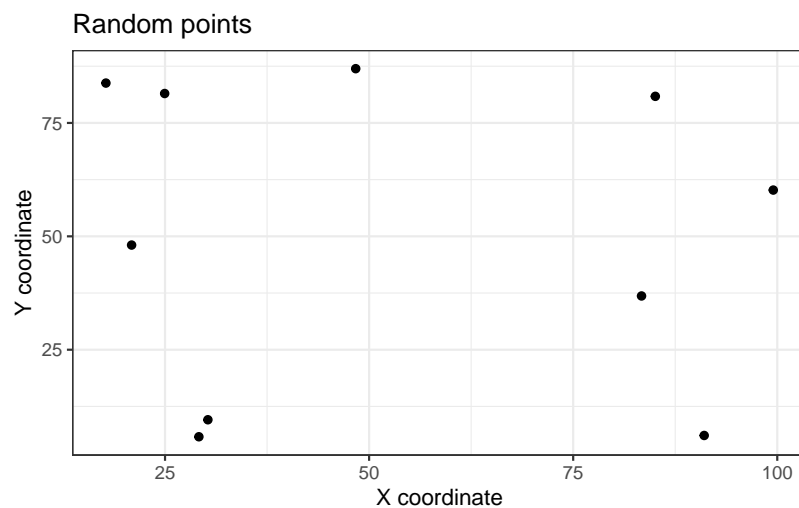

Clearly, one issue is that **not all study areas are rectangles!** Rather, they are quite often irregular. This artificial dataset is just to illustrate the **concept** of sampling infinitely, rather than be practically useful. The analysis of spatial data is not in the scope of this unit.

2.4 Practice

Use this section to practice taking random samples from finite populations. Code is provided, but hidden by default for you to make comparisons with your own. Click on the “Show the code” button to reveal the code.

1. Generate 20 random points within a 100m x 100m study area.

```
set.seed(1242)
xcoord <- runif(n = 20, min = 0, max = 100)
ycoord <- runif(n = 20, min = 0, max = 100)
sites <- data.frame(xcoord, ycoord)
```

2. Now this combines `sample()` and `runif()` functions. Use `runif()` to generate 100 data points between 10 and 20, and then use `sample()` to sample 20 of these points.

```
set.seed(1242)
data <- runif(n = 100, min = 10, max = 20)
sampled_data <- sample(data, size = 20)
```

3. Use `ggplot2` to plot a histogram of the sampled data generated in the previous step.

```
library(ggplot2)
ggplot(
  data = data.frame(data = sampled_data),
  aes(x = data)
) +
  geom_histogram(
    binwidth = 0.5,
    color = "black"
  ) +
  labs(
    title = "Histogram of sampled data",
    x = "Value",
    y = "Frequency"
  ) +
  theme_bw()
```

3 Done!

3.0.1 Thanks!

This is the end of the tutorial.

If you have any questions or suggestions, let me know during the lectures or via email. You know where to find me!