



# Master System Interface Control Document

***EOEPCA.ICD.001***

TVUK System Team

Version Draft for 0.1, In Progress:

# Master System Interface Control Document

1. Introduction .....	2
1.1. Purpose and Scope .....	2
1.2. Structure of the Document .....	2
1.3. Reference Documents .....	2
1.4. Terminology .....	5
1.5. Glossary .....	9
2. Context .....	11
3. Design Overview .....	13
3.1. Domain Areas .....	13
3.1.1. User Management .....	14
3.1.2. Processing and Chaining .....	14
3.1.3. Resource Management .....	14
3.1.4. Platform API .....	15
3.1.5. Web Portal .....	15
3.2. Architecture Layers .....	16
4. User Management .....	19
4.1. Interfaces .....	19
4.1.1. Identity and Authentication management .....	19
4.1.1.1. IAM interfaces .....	21
4.1.1.2. IAM information .....	24
4.1.2. Accounting and Billing .....	24
4.1.3. User profile .....	24
5. Processing and Chaining .....	26
5.1. Solution Overview .....	27
5.2. Resource Layer (Infrastructure) Interface .....	30
5.3. Application Packaging .....	30
5.4. Execution Management Service (EMS) .....	34
5.5. Application Deployment and Execution Service (ADES) .....	36
5.6. Processing Service Data Access .....	38
5.6.1. User Authorization Context .....	42
5.7. WPS-T REST/JSON .....	42
5.8. Interactive (Graphical) Applications .....	44
5.9. Parallel Processing .....	45
5.10. Processor Development Environment (PDE) .....	45
5.11. Interactive Analysis Tool .....	46
6. Resource Management .....	47
6.1. Resource Catalogue .....	49
6.1.1. CEOS OpenSearch Best Practise .....	50

6.1.2. Application Catalogue .....	50
6.1.3. Data Catalogue .....	50
6.1.3.1. Metadata Organisation .....	51
6.1.3.2. Example Usage with OpenSearch .....	51
6.1.3.3. Data Access .....	51
6.1.3.4. Catalogue Composition/Aggregation .....	52
6.1.4. Federated Discovery .....	53
6.2. Data Access Services .....	54
6.3. Data Access Gateway .....	54
6.4. Data Access Library (DAL) .....	55
6.5. Data Ingestion .....	56
6.6. Workspace .....	56
7. Platform API .....	58
7.1. Service API .....	59
7.1.1. Platform Capabilities .....	59
7.1.2. authentication .....	60
7.1.3. billing .....	60
7.1.4. data_search .....	60
7.1.5. data_catalogue .....	60
7.1.6. app_search .....	60
7.1.7. map .....	60
7.1.8. tile .....	61
7.1.9. feature .....	61
7.1.10. coverage .....	61
7.1.11. datacube .....	61
7.1.12. object_store .....	61
7.1.13. ems .....	62
7.1.14. ades .....	62
7.1.15. workspace .....	62
7.2. Client Library .....	62
7.2.1. Client Library Concept Illustration .....	63
8. Web Portal .....	66

# EO Exploitation Platform Common Architecture

## *Master System Interface Control Document*

EOEPCA.ICD.001

COMMENTS and ISSUES	PDF
<p>If you would like to raise comments or issues on this document, please do so by raising an Issue at the following URL <a href="https://github.com/EOEPCA/master-system-icd/issues">https://github.com/EOEPCA/master-system-icd/issues</a>.</p>	<p>This document is available in PDF format <a href="#">here</a>.</p>
<p><b>EUROPEAN SPACE AGENCY CONTRACT REPORT</b> The work described in this report was done under ESA contract. Responsibility for the contents resides in the author or organisation that prepared it.</p>	<p><b>TELESPAZIO VEGA UK Ltd</b> 350 Capability Green, Luton, Bedfordshire, LU1 3LU, United Kingdom. Tel: +44 (0)1582 399000 <a href="http://www.telespazio-vega.com">www.telespazio-vega.com</a></p>

### AMENDMENT HISTORY

This document shall be amended by releasing a new edition of the document in its entirety. The Amendment Record Sheet below records the history and issue status of this document.

*Table 1. Amendment Record Sheet*

ISSUE	DATE	REASON
0.1	28/04/2020	Initial in-progress draft

# Chapter 1. Introduction

## 1.1. Purpose and Scope

This is the Master System Interface Control Document for the Common Architecture.

## 1.2. Structure of the Document

### Section 2 - Context

Provides the context for Exploitation Platforms within the ecosystem of EO analysis.

### Section 3 - Design Overview

Provides an overview of the Common Architecture and the domain areas.

### Section 4 - User Management

Describes the User Management domain area.

### Section 5 - Processing and Chaining

Describes the Processing & Chaining domain area.

### Section 6 - Resource Management

Describes the Resource Management domain area.

### Section 7 - Platform API

Describes the Platform API, covering all domain areas.

### Section 8 - Web Portal

Describes the Web Portal, covering all domain areas.

## 1.3. Reference Documents

The following is a list of Reference Documents with a direct bearing on the content of this document.

Reference	Document Details	Version
[EOEPCA-UC]	EOEPCA - Use Case Analysis EOEPCA.TN.005 <a href="https://eoepca.github.io/use-case-analysis">https://eoepca.github.io/use-case-analysis</a>	Issue 1.0, 02/08/2019
[EP-FM]	Exploitation Platform - Functional Model, ESA-EOPSDP-TN-17-050	Issue 1.0, 30/11/2017
[TEP-OA]	Thematic Exploitation Platform Open Architecture, EMSS-EOPS-TN-17-002	Issue 1, 12/12/2017

<b>Reference</b>	<b>Document Details</b>	<b>Version</b>
[WPS-T]	OGC Testbed-14: WPS-T Engineering Report, OGC 18-036r1, <a href="http://docs.opengeospatial.org/per/18-036r1.html">http://docs.opengeospatial.org/per/18-036r1.html</a>	18-036r1, 07/02/2019
[WPS-REST-JSON]	OGC WPS 2.0 REST/JSON Binding Extension, Draft, OGC 18-062, <a href="https://raw.githubusercontent.com/opengeospatial/wps-rest-binding/develop/docs/18-062.pdf">https://raw.githubusercontent.com/opengeospatial/wps-rest-binding/develop/docs/18-062.pdf</a>	1.0-draft
[CWL]	Common Workflow Language Specifications, <a href="https://www.commonwl.org/v1.0/">https://www.commonwl.org/v1.0/</a>	v1.0.2
[TB13-AP]	OGC Testbed-13, EP Application Package Engineering Report, OGC 17-023, <a href="http://docs.opengeospatial.org/per/17-023.html">http://docs.opengeospatial.org/per/17-023.html</a>	17-023, 30/01/2018
[TB13-ADES]	OGC Testbed-13, Application Deployment and Execution Service Engineering Report, OGC 17-024, <a href="http://docs.opengeospatial.org/per/17-024.html">http://docs.opengeospatial.org/per/17-024.html</a>	17-024, 11/01/2018
[TB14-AP]	OGC Testbed-14, Application Package Engineering Report, OGC 18-049r1, <a href="http://docs.opengeospatial.org/per/18-049r1.html">http://docs.opengeospatial.org/per/18-049r1.html</a>	18-049r1, 07/02/2019
[TB14-ADES]	OGC Testbed-14, ADES & EMS Results and Best Practices Engineering Report, OGC 18-050r1, <a href="http://docs.opengeospatial.org/per/18-050r1.html">http://docs.opengeospatial.org/per/18-050r1.html</a>	18-050r1, 08/02/2019
[OS-GEO-TIME]	OpenSearch GEO: OpenSearch Geo and Time Extensions, OGC 10-032r8, <a href="http://www.opengeospatial.org/standards/opensearchgeo">http://www.opengeospatial.org/standards/opensearchgeo</a>	10-032r8, 14/04/2014
[OS-EO]	OpenSearch EO: OGC OpenSearch Extension for Earth Observation, OGC 13-026r9, <a href="http://docs.opengeospatial.org/is/13-026r8/13-026r8.html">http://docs.opengeospatial.org/is/13-026r8/13-026r8.html</a>	13-026r9, 16/12/2016
[GEOJSON-LD]	OGC EO Dataset Metadata GeoJSON(-LD) Encoding Standard, OGC 17-003r1/17-084	17-003r1/17-084

<b>Reference</b>	<b>Document Details</b>	<b>Version</b>
[GEOJSON-LD-RESP]	OGC OpenSearch-EO GeoJSON(-LD) Response Encoding Standard, OGC 17-047	17-047
[PCI-DSS]	The Payment Card Industry Data Security Standard, <a href="https://www.pcisecuritystandards.org/document_library?category=pcidss&amp;document=pci_dss">https://www.pcisecuritystandards.org/document_library?category=pcidss&amp;document=pci_dss</a>	v3.2.1
[CEOS-OS-BP]	CEOS OpenSearch Best Practise, <a href="http://ceos.org/ourwork/workinggroups/wgiss/access/opensearch/">http://ceos.org/ourwork/workinggroups/wgiss/access/opensearch/</a>	v1.2, 13/06/2017
[OIDC]	OpenID Connect Core 1.0, <a href="https://openid.net/specs/openid-connect-core-1_0.html">https://openid.net/specs/openid-connect-core-1_0.html</a>	v1.0, 08/11/2014
[OGC-CSW]	OGC Catalogue Services 3.0 Specification - HTTP Protocol Binding (Catalogue Services for the Web), OGC 12-176r7, <a href="http://docs.opengeospatial.org/is/12-176r7/12-176r7.html">http://docs.opengeospatial.org/is/12-176r7/12-176r7.html</a>	v3.0, 10/06/2016
[OGC-WMS]	OGC Web Map Server Implementation Specification, OGC 06-042, <a href="http://portal.opengeospatial.org/files/?artifact_id=14416">http://portal.opengeospatial.org/files/?artifact_id=14416</a>	v1.3.0, 05/03/2006
[OGC-WMTS]	OGC Web Map Tile Service Implementation Standard, OGC 07-057r7, <a href="http://portal.opengeospatial.org/files/?artifact_id=35326">http://portal.opengeospatial.org/files/?artifact_id=35326</a>	v1.0.0, 06/04/2010
[OGC-WFS]	OGC Web Feature Service 2.0 Interface Standard – With Corrigendum, OGC 09-025r2, <a href="http://docs.opengeospatial.org/is/09-025r2/09-025r2.html">http://docs.opengeospatial.org/is/09-025r2/09-025r2.html</a>	v2.0.2, 10/07/2014
[OGC-WCS]	OGC Web Coverage Service (WCS) 2.1 Interface Standard - Core, OGC 17-089r1, <a href="http://docs.opengeospatial.org/is/17-089r1/17-089r1.html">http://docs.opengeospatial.org/is/17-089r1/17-089r1.html</a>	v2.1, 16/08/2018
[OGC-WCPS]	Web Coverage Processing Service (WCPS) Language Interface Standard, OGC 08-068r2, <a href="http://portal.opengeospatial.org/files/?artifact_id=32319">http://portal.opengeospatial.org/files/?artifact_id=32319</a>	v1.0.0, 25/03/2009

Reference	Document Details	Version
[AWS-S3]	Amazon Simple Storage Service REST API, <a href="https://docs.aws.amazon.com/AmazonS3/latest/API">https://docs.aws.amazon.com/AmazonS3/latest/API</a>	API Version 2006-03-01

## 1.4. Terminology

The following terms are used in the Master System Interface Control Document.

Term	Meaning
Admin	User with administrative capability on the EP
Algorithm	A self-contained set of operations to be performed, typically to achieve a desired data manipulation. The algorithm must be implemented (codified) for deployment and execution on the platform.
Analysis Result	The <i>Products</i> produced as output of an <i>Interactive Application</i> analysis session.
Analytics	A set of activities aimed to discover, interpret and communicate meaningful patterns within the data. Analytics considered here are performed manually (or in a semi-automatic way) on-line with the aid of <i>Interactive Applications</i> .
Application Artefact	The 'software' component that provides the execution unit of the <i>Application Package</i> .
Application Deployment and Execution Service (ADES)	WPS-T (REST/JSON) service that incorporates the Docker execution engine, and is responsible for the execution of the processing service (as a WPS request) within the 'target' Exploitation Platform.
Application Descriptor	A file that provides the metadata part of the <i>Application Package</i> . Provides all the metadata required to accommodate the processor within the WPS service and make it available for execution.
Application Package	A platform independent and self-contained representation of a software item, providing executable, metadata and dependencies such that it can be deployed to and executed within an Exploitation Platform. Comprises the <i>Application Descriptor</i> and the <i>Application Artefact</i> .
Bulk Processing	Execution of a <i>Processing Service</i> on large amounts of data specified by AOI and TOI.
Code	The codification of an algorithm performed with a given programming language - compiled to Software or directly executed (interpreted) within the platform.
Compute Platform	The Platform on which execution occurs (this may differ from the Host or Home platform where federated processing is happening)

Term	Meaning
Consumer	User accessing existing services/products within the EP. Consumers may be scientific/research or commercial, and may or may not be experts of the domain
Data Access Library	An abstraction of the interface to the data layer of the resource tier. The library provides bindings for common languages (including python, Javascript) and presents a common object model to the code.
Development	The act of building new products/services/applications to be exposed within the platform and made available for users to conduct exploitation activities. Development may be performed inside or outside of the platform. If performed outside, an integration activity will be required to accommodate the developed service so that it is exposed within the platform.
Discovery	User finds products/services of interest to them based upon search criteria.
Execution	The act to start a <i>Processing Service</i> or an <i>Interactive Application</i> .
Execution Management Service (EMS)	The EMS is responsible for the orchestration of workflows, including the possibility of steps running on other (remote) platforms, and the on-demand deployment of processors to local/remote ADES as required.
Expert	User developing and integrating added-value to the EP (Scientific Researcher or Service Developer)
Exploitation Tier	The Exploitation Tier represents the end-users who exploit the services of the platform to perform analysis, or using high-level applications built-in on top of the platform's services
External Application	An application or script that is developed and executed outside of the Exploitation Platform, but is able to use the data/services of the EP via a programmatic interface (API).
Guest	An unregistered User or an unauthenticated Consumer with limited access to the EP's services
Home Platform	The Platform on which a User is based or from which an action was initiated by a User
Host Platform	The Platform through which a Resource has been published
Identity Provider (IdP)	The source for validating user identity in a federated identity system, (user authentication as a service).
Interactive Application	A stand-alone application provided within the exploitation platform for on-line hosted processing. Provides an interactive interface through which the user is able to conduct their analysis of the data, producing <i>Analysis Results</i> as output. Interactive Applications include at least the following types: console application, web application (rich browser interface), remote desktop to a hosted VM.

Term	Meaning
Interactive Console Application	A simple <i>Interactive Application</i> for analysis in which a console interface to a platform-hosted terminal is provided to the user. The console interface can be provided through the user's browser session or through a remote SSH connection.
Interactive Remote Desktop	An Interactive Application for analysis provided as a remote desktop session to an OS-session (or directly to a 'native' application) on the exploitation platform. The user will have access to a number of applications within the hosted OS. The remote desktop session is provided through the user's web browser.
Interactive Web Application	An Interactive Application for analysis provided as a rich user interface through the user's web browser.
Key-Value Pair	A key-value pair (KVP) is an abstract data type that includes a group of key identifiers and a set of associated values. Key-value pairs are frequently used in lookup tables, hash tables and configuration files.
Kubernetes (K8s)	Container orchestration system for automating application deployment, scaling and management.
Login Service	An encapsulation of Authenticated Login provision within the Exploitation Platform context. The Login Service is an OpenID Connect Provider that is used purely for authentication. It acts as a Relying Party in flows with external IdPs to obtain access to the user's identity.
Network of EO Resources	The coordinated collection of European EO resources (platforms, data sources, etc.).
Object Store	A computer data storage architecture that manages data as objects. Each object typically includes the data itself, a variable amount of metadata, and a globally unique identifier.
On-demand Processing Service	A <i>Processing Service</i> whose execution is initiated directly by the user on an ad-hoc basis.
Platform (EP)	An on-line collection of products, services and tools for exploitation of EO data
Platform Tier	The Platform Tier represents the Exploitation Platform and the services it offers to end-users
Processing	A set of pre-defined activities that interact to achieve a result. For the exploitation platform, comprises on-line processing to derive data products from input data, conducted by a hosted processing service execution.
Processing Result	The <i>Products</i> produced as output of a <i>Processing Service</i> execution.
Processing Service	A non-interactive data processing that has a well-defined set of input data types, input parameterisation, producing <i>Processing Results</i> with a well-defined output data type.

Term	Meaning
Products	EO data (commercial and non-commercial) and Value-added products and made available through the EP. <i>It is assumed that the Hosting Environment for the EP makes available an existing supply of EO Data</i>
Resource	A entity, such as a Product, Processing Service or Interactive Application, which is of interest to a user, is indexed in a catalogue and can be returned as a single meaningful search result
Resource Tier	The Resource Tier represents the hosting infrastructure and provides the EO data, storage and compute upon which the exploitation platform is deployed
Reusable Research Object	An encapsulation of some research/analysis that describes all aspects required to reproduce the analysis, including data used, processing performed etc.
Scientific Researcher	Expert user with the objective to perform scientific research. Having minimal IT knowledge with no desire to acquire it, they want the effort for the translation of their algorithm into a service/product to be minimised by the platform.
Service Developer	Expert user with the objective to provide a performing, stable and reliable service/product. Having deeper IT knowledge or a willingness to acquire it, they require deeper access to the platform IT functionalities for optimisation of their algorithm.
Software	The compilation of code into a binary program to be executed within the platform on-line computing environment.
Systematic Processing Service	A <i>Processing Service</i> whose execution is initiated automatically (on behalf of a user), either according to a schedule (routine) or triggered by an event (e.g. arrival of new data).
Terms & Conditions (T&Cs)	The obligations that the user agrees to abide by in regard of usage of products/services of the platform. T&Cs are set by the provider of each product/service.
Transactional Web Processing Service (WPS-T)	Transactional extension to WPS that allows adhoc deployment / undeployment of user-provided processors.
User	An individual using the EP, of any type (Admin/Consumer/Expert/Guest)
Value-added products	Products generated from processing services of the EP (or external processing) and made available through the EP. This includes products uploaded to the EP by users and published for collaborative consumption
Visualisation	To obtain a visual representation of any data/products held within the platform - presented to the user within their web browser session.
Web Coverage Service (WCS)	OGC standard that provides an open specification for sharing raster datasets on the web.

<b>Term</b>	<b>Meaning</b>
Web Coverage Processing Service (WCPS)	OGC standard that defines a protocol-independent language for the extraction, processing, and analysis of multi-dimensional coverages representing sensor, image, or statistics data.
Web Feature Service (WFS)	OGC standard that makes geographic feature data (vector geospatial datasets) available on the web.
Web Map Service (WMS)	OGC standard that provides a simple HTTP interface for requesting geo-registered map images from one or more distributed geospatial databases.
Web Map Tile Service (WMTS)	OGC standard that provides a simple HTTP interface for requesting map tiles of spatially referenced data using the images with predefined content, extent, and resolution.
Web Processing Services (WPS)	OGC standard that defines how a client can request the execution of a process, and how the output from the process is handled.
Workspace	A user-scoped 'container' in the EP, in which each user maintains their own links to resources (products and services) that have been collected by a user during their usage of the EP. The workspace acts as the hub for a user's exploitation activities within the EP

## 1.5. Glossary

The following acronyms and abbreviations have been used in this report.

<b>Term</b>	<b>Definition</b>
AAI	Authentication & Authorization Infrastructure
ABAC	Attribute Based Access Control
ADES	Application Deployment and Execution Service
ALFA	Abbreviated Language For Authorization
AOI	Area of Interest
API	Application Programming Interface
CMS	Content Management System
CWL	Common Workflow Language
DAL	Data Access Library
EMS	Execution Management Service
EO	Earth Observation
EP	Exploitation Platform
FUSE	Filesystem in Userspace
GeoXACML	Geo-specific extension to the XACML Policy Language
IAM	Identity and Access Management

<b>Term</b>	<b>Definition</b>
IdP	Identity Provider
JSON	JavaScript Object Notation
K8s	Kubernetes
KVP	Key-value Pair
M2M	Machine-to-machine
OGC	Open Geospatial Consortium
PDE	Processor Development Environment
PDP	Policy Decision Point
PEP	Policy Enforcement Point
PIP	Policy Information Point
RBAC	Role Based Access Control
REST	Representational State Transfer
SSH	Secure Shell
TOI	Time of Interest
UMA	User-Managed Access
VNC	Virtual Network Computing
WCS	Web Coverage Service
WCPS	Web Coverage Processing Service
WFS	Web Feature Service
WMS	Web Map Service
WMTS	Web Map Tile Service
WPS	Web Processing Service
WPS-T	Transactional Web Processing Service
XACML	eXtensible Access Control Markup Language

# Chapter 2. Context

The Master System Interface Control Document provides an EO Exploitation Platform architecture that meets the service needs of current and future systems, as defined by the use cases described in [\[EOEPCA-UC\]](#). These use cases must be explored under 'real world' conditions by engagement with existing deployments, initiatives, user groups, stakeholders and sponsors within the user community and within overlapping communities, in order to gain a fully representative understanding of the functional requirements.

The ICD takes into consideration existing precursor architectures (such as the Exploitation Platform Functional Model [\[EP-FM\]](#) and Thematic Exploitation Platform Open Architecture [\[TEP-OA\]](#)), including consideration of state-of-the-art technologies and approaches used by current related projects. The master system ICD describes functional blocks linked together by agreed standardised interfaces.

The importance of the OGC in these activities is recognised as a reference for the appropriate standards and in providing mechanisms to develop and evolve standards as required in the development of the architecture. In order to meet the design challenges we must apply the applicable existing OGC standards to the full set of federated use cases in order to expose deficiencies and identify needed evolution of the standards. Standards are equally important in all areas of the Exploitation Platform, including topics such as Authentication & Authorization Infrastructure (AAI), containerisation and provisioning of virtual cloud resources to ensure portability of compute between different providers of resource layer.

Data and metadata are fundamental considerations for the creation of an architecture in order to ensure full semantic interoperability between services. In this regard, data modelling and the consideration of data standards are critical activities.

The ICD must go beyond the provision of a standalone EO Exploitation Platform, by intrinsically supporting federation of similar EO platforms at appropriate levels of the service stack. The Network of EO Resources seeks, 'to unite the available - but scattered - European resources in a large federated and open environment'. In such a context, federation provides the potential to greatly enhance the utilization of data and services and provide as stimulus for research and commercial exploitation. From the end-user point of view, the federated system should present itself as a single consolidated environment in which all the federated resources are made available as an integrated system. Thus, the system ICD must specify federation-level interfaces that support this data and service-level interoperability in such a way that is seamless to the end users.

The goal is to create an Integrated Data Exploitation Environment. Users will apply their workflows close to the hosted data, supplemented by their own data. Processing outputs may be hosted as new products that can themselves contribute to the global catalogue. This paradigm can then be extended to encompass the federated set of Exploitation Platforms within the Network of EO Resources. The result is a Federated, Integrated Data Analysis Environment.

A Reference Implementation of the full architecture will be developed to prove the concepts and also to provide an off-the-shelf solution that can be instantiated by future projects to implement their EO Exploitation Platform, thus facilitating their ability to join the federated Network of EO Resources. **Thus, the Reference Implementation can be regarded as a set of re-usable platform**

**services, in the context of a re-usable platform architecture.**

# Chapter 3. Design Overview

The overall system ICD has been considered by taking the ‘Exploitation Platform – Functional Model’ [EP-FM] as a starting point and then evolving these ideas in the context of existing interface standards (with some emphasis on the OGC protocol suite) and the need for federated services.

## 3.1. Domain Areas

The system architecture is designed to meet the use cases as defined in [EOEPCA-UC] and [EP-FM]. [EOEPCA-UC] makes a high-level analysis of the use-cases to identify the main system functionalities organised into domain areas: ‘User Management’, ‘Processing & Chaining’ and ‘Resource Management’. The high-level functionalities are often met by more than one domain area, and User Management (specifically Identity & Access Management) cuts across all use cases, and forms the basis of all access control restrictions that are applied to platform services and data.

Figure 1 depicts the domain areas as top level component blocks in a Platform ‘A’. The arrows may be read as “uses”, each implying one or more service interfaces.

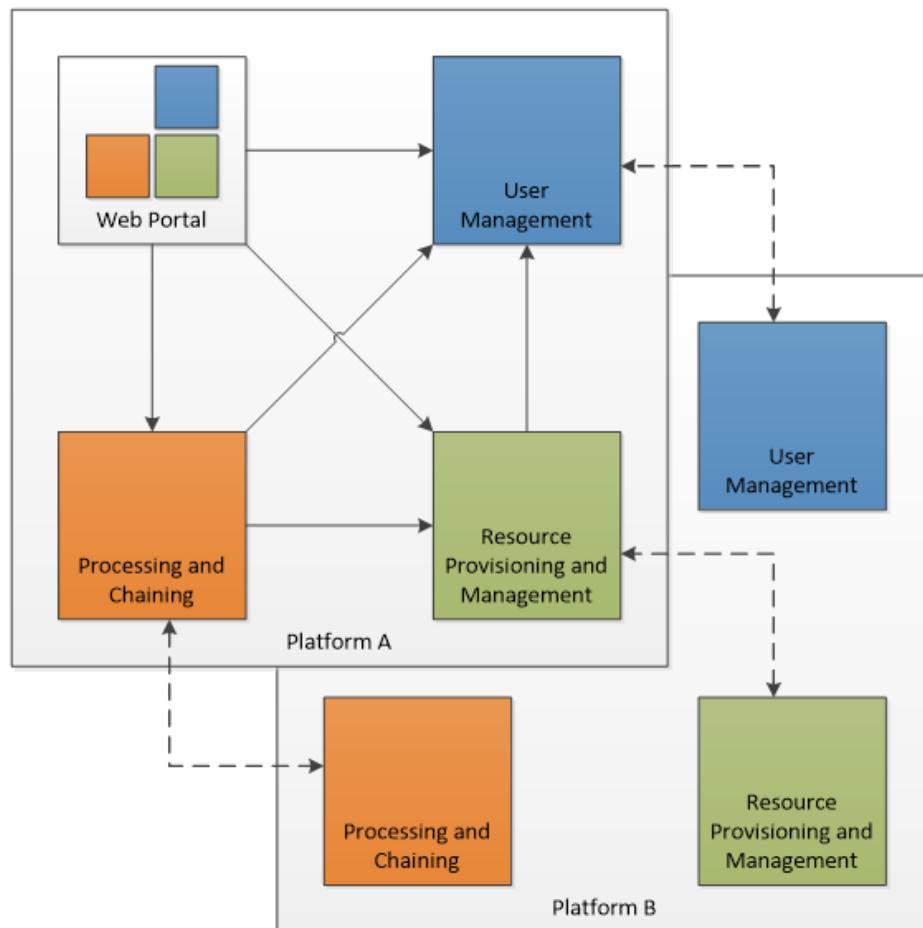


Figure 1. Top-level Architecture

A potential federation concept is represented by interactions between corresponding blocks in a collaborating Platform ‘B’. The architecture aims to minimise dependencies and is conducive to the principle of subcontracting the implementation to experts in the respective domains. The web portal integrates various client components to form a rich user-facing interface. **The Web Portal is depicted as it has interfaces with the other domain areas - but it is not a priority concern for**

**the Common Architecture. Each exploitation platform would be expected to develop its own web interfaces according to its needs.**

### **3.1.1. User Management**

*Responsible for all aspects related to user identity, authentication, authorization, accounting and billing in a federated system-of-systems environment.*

It provides authentication, authorization and accounting services that are required to access other elements of the architecture, including the processing-oriented services and resource-oriented services. Individual resources may have an associated access and/or charging policy, but these have to be checked against the identity of the user. Resource consumption may also be controlled e.g. by credits and/or quotas associated with the user account. In the Network of EO Resources, a user should not need to create an account on multiple platforms. Therefore some interactions will be required between the User Management functions, whether directly or indirectly via trusted third party.

### **3.1.2. Processing and Chaining**

*Provides access to a variety of processing functions, tools and applications, as well as execution environments in which to deploy them.*

Provides a deployment and execution environment for processing tasks, analysis tools and interactive applications. Supports the chaining of processing tasks in workflows whose execution can include steps executed external to the origin exploitation platform. Handles and abstracts the low-level complexities of the different underlying compute technologies, and ensures the compute layer is scaled in accordance with current demand. Provides an integrated development environment to facilitate development of new processing algorithms and applications. Facilitating the network of EO resources by providing a federated interface to other processing services within the wider EO network.

The development and analysis environment provides a platform for the expert user to develop their own processing chains, experiments and workflows. It integrates with platform catalogue services (for data, processing services and applications) for discovery of available published datasets and processing elements. Subject to appropriate controls and permissions, the user can publish their own processing services and results. Workflows can be executed within the context of the processing facility, with the possibility to execute steps ‘remotely’ in collaborating platforms, with the results being collected for the continuation of the workflow.

### **3.1.3. Resource Management**

*Responsible for maintaining an inventory of platform and federated resources, and providing services for data access and visualisation.*

Storage and cataloguing of all persistent resources. First and foremost, this will contain multidimensional geo-spatial datasets. In addition it may include a variety of heterogeneous data and other resources, such as documentation, Docker images, processing workflows, etc. Handles and abstracts the low-level complexities of different underlying storage technologies and strategies. Facilitating the network of EO resources by providing a federated interface to other data services

within the wider EO network.

The catalogue holds corresponding metadata for every published resource item in the local platform storage, as well as entries for resources that are located on remote collaborating platforms. Catalogue search and data access is provided through a range of standard interfaces, which are used by the local Web Portal and Processing & Chaining elements and may be exposed externally as web services.

Access to services and resources is controlled according to an associated authorization policy as defined by the IAM approach. This component may interact with corresponding peer components on other platforms - for example to synchronise catalogue entries.

The user has a personal workspace in which to upload files, organise links to resources of interest (services/application/data), and receive/manage results output from processing executions. Shared workspaces for collaboration can be similarly provisioned. The ingestion of new data is controlled to ensure the quality of any published resource, including associated metadata, and to maintain the integrity of the catalogue.

### **3.1.4. Platform API**

*Defines standard interfaces at both service and programmatic levels.*

The Service API and its associated Client Library together present a standard platform interface against which analysis and exploitation activities may be developed, and through which platform services can be federated. The Platform API encourages interoperation between platforms and provides a consistent and portable programming paradigm for expert users.

### **3.1.5. Web Portal**

*Presents the platform user interface for interacting with the local resources and processing facilities, as well as the wider network of EO resources.*

The Web Portal provides the user interface (themed and branded according to the owning organisation) through which the user discovers the data/services available within the platform, and the analysis environment through which they can exploit these resources. It provides a rich, interactive web interface for discovering and working with all kinds of resources, including EO data, processing and documentation. It includes web service clients for smart search and data visualisations. It provides a workspace for developing and deploying processing algorithms, workflows, experiments and applications, and publishing results. It includes support and collaboration tools for the community.

Web Portal integrates together various web service clients that uses services provided by the specialist domains (Processing, Resource, User) on the local platform and collaborating platforms.

## 3.2. Architecture Layers

Figure 2 provides a simplified architectural view that illustrates the broad architecture layers of the Exploitation Platform, presented in the context of the infrastructure in which it is hosted and the end-users performing exploitation activities.

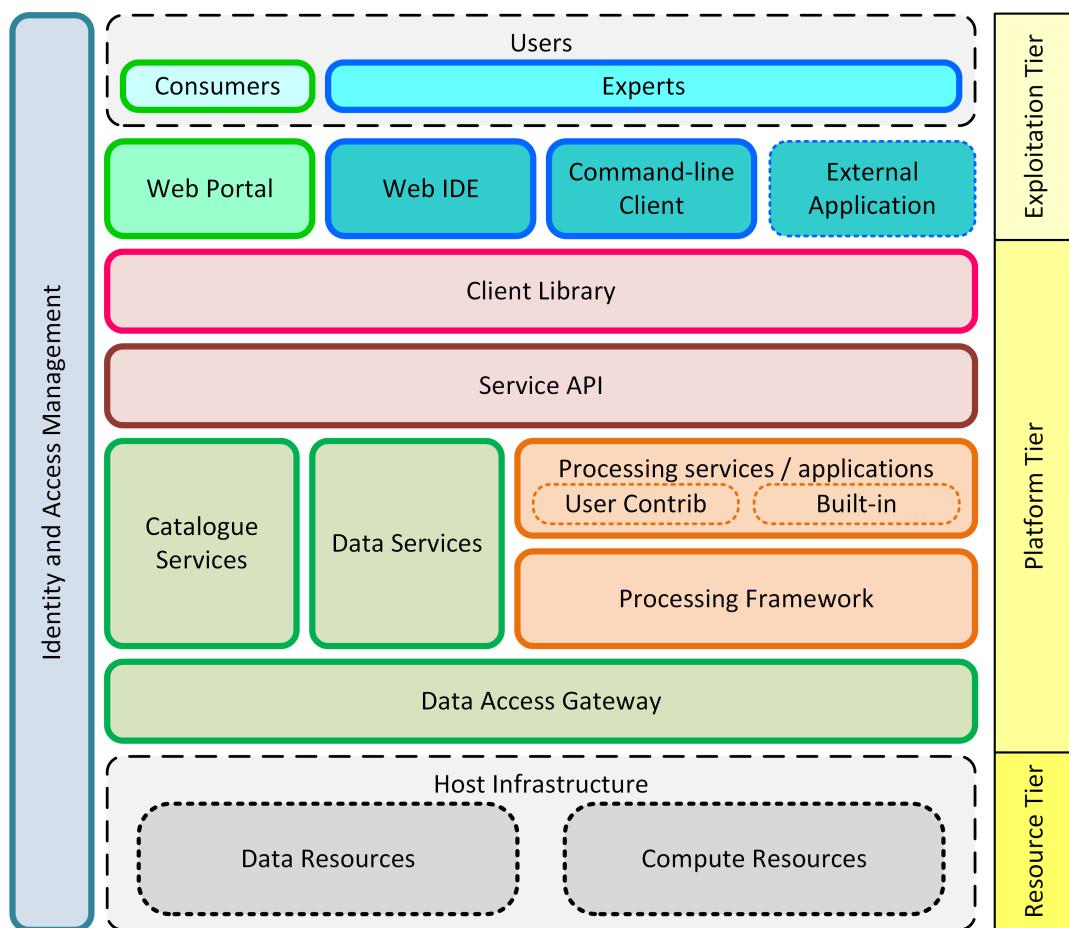


Figure 2. Architecture Layers

### Resource Tier

The Resource Tier represents the hosting infrastructure and provides the EO data, storage and compute upon which the exploitation platform is deployed.

### Platform Tier

The Platform Tier represents the Exploitation Platform and the services it offers to end-users. The layers comprising the Platform Tier are further described below.

### Exploitation Tier

The Exploitation Tier represents the end-users who exploit the services of the platform to perform analysis, or using high-level applications built-in on top of the platform's services.

The Exploitation Platform builds upon the services provided by the hosting infrastructure - specifically accessing its data holding and using its compute resources. The components providing the EP services are deployed within the compute offering, with additional compute resources being provisioned on-demand to support end-user analysis activities.

The EP's services access the data resources through a Data Access Gateway that provides an

abstraction of the data access interface provided by the resource tier. This abstraction provides a 'standard' data access semantic that can be relied upon by other EP services - thus isolating specific data access concerns of the resource tier to a single EP component.

The Processing Framework provides the environment through which processing services and applications are executed in support of end-user analysis activities. It might be envisaged that some built-in (common) processing functions are provided, but the main focus of the processing framework is to support deployment and execution of bespoke end-user processing algorithms, and interactive analysis. Access to the underlying data from the executing processes is marshalled through the Data Access Gateway and its supporting Data Access Library.

The EP provides Catalogue services, so that end-users can discover and browse the resources available in the platform and its federated partners. Thus, end-users can discover available processing services and applications, and search for data available for inclusion in their analysis.

Data Services based upon open standards serve the clients of the Exploitation Platform for data access and data visualisation. Access to the underlying data is made via the Data Access Gateway.

The Service API represents the public service interfaces exposed by the Exploitation Platform for consumption by its clients. Covering all aspects of the EP (authentication, data/processing discovery, processing etc.), these interfaces are based upon open standards and are designed to offer a consistent EP service access semantic within the network of EO resources. Use of the network (HTTP) interfaces of the Service API is facilitated by the Client Library that provides bindings for common languages (Python, R, Javascript). The Client Library is a programmatic representation of the Service API which acts as an abstraction of the Exploitation Platform and so facilitates the development of portable client implementations.

The Exploitation Tier hosts the web clients with which the end-user interacts to conduct their analysis/exploitation activities. These clients would typically utilise the Client Library in their implementation. The Web IDE is an interactive web application that Experts use to perform interactive research and to develop algorithms. The Command-line Client builds upon the Client Library to provide a command-line tool that can be used, for example, to automate EP interactions through scripts.

The Web Portal provides the main user interface for the Exploitation Platform. It would be expected that each platform would provide its own bespoke portal implementation, and so is beyond the scope of the Common Architecture. Nevertheless, the architecture and its service interface must meet the needs anticipated by future exploitation platform implementations. Similarly, the External Application represents web applications (external to the hosting environment of the exploitation platform) that use the services of the EP via its Service API and Client Library.

All user interactions with the services of the EP are executed within the context of a given user and their rights to access resources, with associated resource usage billing. Thus, the Identity and Access Management component covers all tiers in this layered model.

The focus of this design document is the Platform Tier, which is elaborated in subsequent sections of the document:

## **Section User Management**

This section addresses the main concerns of User Management which are user identity, access to resources and billing for resource usage.

## **Section Processing and Chaining**

This section covers application packaging and the Processing Framework through which services/applications can be deployed in federated workflows.

## **Section Resource Management**

This section covers resource discovery through catalogues that act as a marketplace for data, services and applications. Resource Management ensures data is accessible through standard interfaces that serve the processing framework, and public data services to visualise and consume platform data.

## **Section Platform API**

This section provides a consolidated description of the service interface of the EP and its associated client library, which together present a standard platform interface against which analysis and exploitation activities may be developed, and through which platform services can be federated.

# Chapter 4. User Management

## 4.1. Interfaces

### *Work In Progress*

This section focuses on the externally available functionality published over interfaces, and how these interfaces connect with external systems.

Each building block contains:

- Description of functionality
- Component diagram
- List of exposed interfaces by URL
- List of services

Each service contains:

- Description of functionality
- Component diagram
- List of exposed interfaces by URL

Each interface in the list contains:

- Unique URL (\*)
- Interface name
- Used port/communications protocol
- Endpoint URL
- Applicable standards
- Conveyed information
- Control and data flow descriptions

(\*) URL would be formed as [port]://[building-block].[eoepca.org]/[endpoint], e.g.  
<https://iam.eoepca.org/logout>


### 4.1.1. Identity and Authentication management

- Description of functionality

The solution for IAM is driven by the need for Federated Identity and Authorization in the context of a network of collaborating exploitation platforms and connected services. This federated environment should facilitate an end-user experience in which they can use a single identity across collaborating platforms (Single Sign-On), they can bring their own existing identity to the platforms ('Login With' service), and platforms can access the federated services of other platforms on behalf of the end-user (delegated access and authorization).

The goal of IAM is to uniquely identify the user and limit access to protected resources to those having suitable access rights. We assume an Attribute Based Access Control (ABAC) approach in which authorization decisions are made based upon access policies/rules that define attributes required by resources and possessed (as claims) by users. ABAC is seen as a more flexible approach than Role Base Access Control (RBAC), affording the ability to express more sophisticated authorizations rules beyond the role(s) of the user - and noting the fact that a role-based ruleset could be implemented within an attribute based approach, (i.e. RBAC is a subset/specialisation of ABAC).

- Component diagram

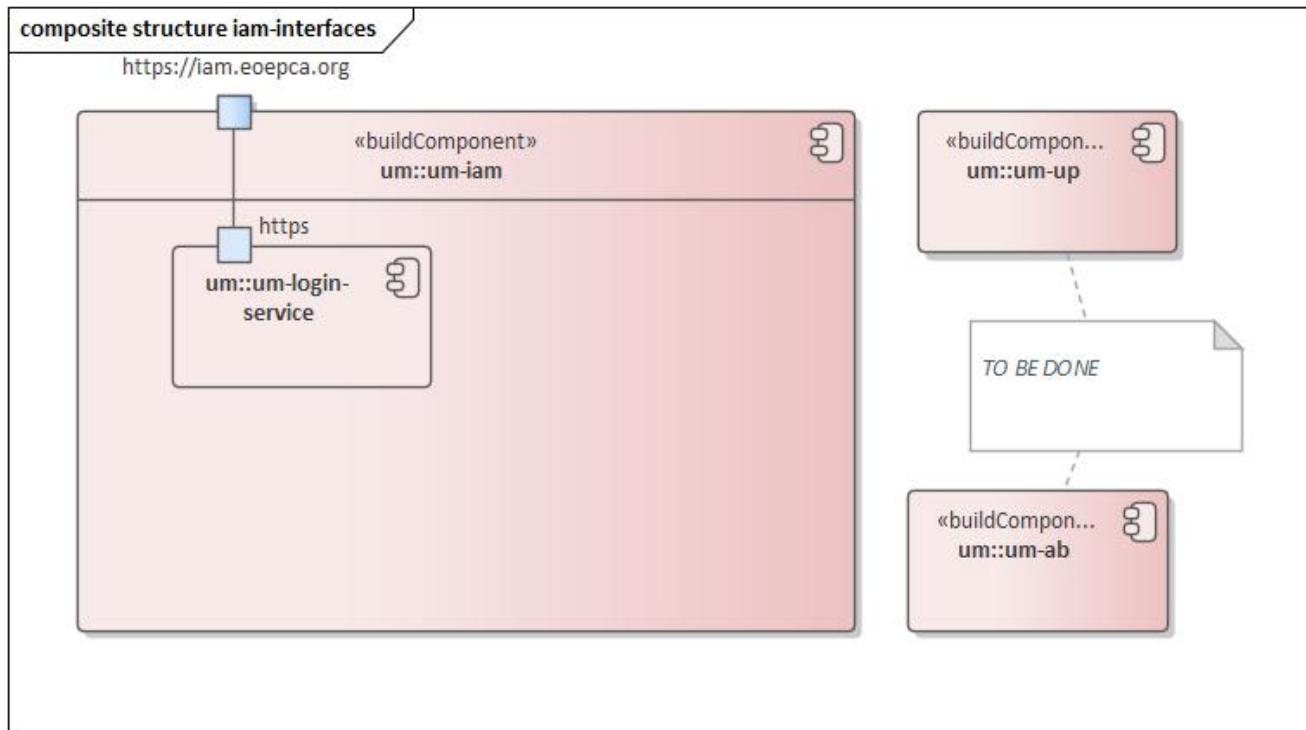

- Link to building block documentation

*Table 2. IAM interfaces*

URL	Name
<a href="https://iam.eoepca.org/authorize">https://iam.eoepca.org/authorize</a>	[authorization]
<a href="https://iam.eoepca.org/token">https://iam.eoepca.org/token</a>	[token]
<a href="https://iam.eoepca.org/userinfo">https://iam.eoepca.org/userinfo</a>	[userinfo]
<a href="https://iam.eoepca.org/jwks">https://iam.eoepca.org/jwks</a>	[jwks]
<a href="https://iam.eoepca.org/logout">https://iam.eoepca.org/logout</a>	[end]
<a href="https://iam.eoepca.org/introspect">https://iam.eoepca.org/introspect</a>	[introspection]
<a href="https://iam.eoepca.org/revoke">https://iam.eoepca.org/revoke</a>	[revocation]
<a href="https://iam.eoepca.org/.well-known/openid-configuration">https://iam.eoepca.org/.well-known/openid-configuration</a>	[discovery]
<a href="https://iam.eoepca.org/clients">https://iam.eoepca.org/clients</a>	[registration]

URL	Name
<a href="https://iam.eoepca.org/.well-known/openid-federation">https://iam.eoepca.org/.well-known/openid-federation</a>	[federation]

Table 3. IAM conveyed information

Information	Interfaces
[oidc_id_token]	[userinfo]

#### 4.1.1.1. IAM interfaces

The primary endpoints required to support the OIDC flows are as follows (these endpoints are taken, by example, from OKTA OIDC discovery metadata, <https://micah.okta.com/oauth2/aus2yrcz7aMrmDAKZ1t7/.well-known/openid-configuration>):

URI: <https://iam.eoepca.org/authorize>

- Description - To initiate the authentication, and to return the access tokens / code grant (depending on flow).
- Applicable standards -
- Operations -
- Conveyed information
- Control and data flow descriptions
- Usage examples

URI: <https://iam.eoepca.org/token>

- Description - To exchange the code grant for the access tokens.
- Applicable standards
- Operations -
- Conveyed information
- Control and data flow descriptions
- Usage examples

URI: <https://iam.eoepca.org/userinfo>

- Description - To obtain the user information ID token in accordance with the scopes requested in the authorization request.
- Applicable standards
- Operations -
- Conveyed information - Returns an [oidc\_id\_token] that asserts a user's authenticated identity with integrity, and non-repudiation.
- Control and data flow descriptions

- Usage examples

URI: <https://iam.eoepca.org/keys>

- Description - To obtain signing keys for Token validation purposes.
- Applicable standards
- Operations -
- Conveyed information
- Control and data flow descriptions
- Usage examples

URI: <https://iam.eoepca.org/logout>

- Description - To logout the user from the Login Service, i.e. clear session cookies etc. Although, given that the actual IdP is externalised from the Login Service, it would remain the case that any session cookies maintained by the external IdP would still be in place for a future authentication flow.
- Applicable standards
- Operations -
- Conveyed information
- Control and data flow descriptions
- Usage examples

URI: <https://iam.eoepca.org/introspect>

- Description - Used by clients to verify access tokens.
- Applicable standards
- Operations -
- Conveyed information
- Control and data flow descriptions
- Usage examples

URI: <https://iam.eoepca.org/revoke>

- Description - Used for (refresh) token revocation.
- Applicable standards
- Operations -
- Conveyed information
- Control and data flow descriptions
- Usage examples

The following endpoints relate to Discovery:

URI: <https://iam.eoepca.org/.well-known/openid-configuration>

- Description - Dynamic discovery of OIDC endpoints by clients.

OpenID Connect makes provision for two types of discovery:

- Discovery of the OpenID Provider Issuer based upon the user's identifier
- Discovery of the OpenID Provider Configuration Information

In the case of our usage within the Exploitation Platform, type 1) is not application since the user's ID comes from their 'Home' organisation and is not (necessarily) tied to an OpenID Connect Provider. Instead the Login Service must implement a discovery 'flow' in which the user is able to select the provider of their identity, as one that is supported by the Login Service deployment.

Regarding discovery type 2), the Login Service exposes an OIDC Provider interface, and this should support retrieval of OIDC Provider Configuration Information. Thus, OIDC Clients can utilise the discovery interface of the Login Service to exploit its services.

This is of most interest in the case of access to federated resources in other EPs, where a resource server in one EP may be acting as an OIDC client of the Login Service in another EP – in which case auto-discovery might be more attractive.

- Applicable standards - [https://openid.net/specs/openid-connect-discovery-1\\_0.html](https://openid.net/specs/openid-connect-discovery-1_0.html)
- Operations -
- Conveyed information
- Control and data flow descriptions
- Usage examples

The following endpoints relate to Dynamic Client Registration:

URI: <https://iam.eoepca.org/clients>

- Description - Dynamic registration of clients (Authentication Agents).

The possibility exists for the OIDC Client (Login Service) to perform auto-registration with the Login Service, using OIDC Client Registration. In doing so the OIDC client obtains its Client ID and Secret.

This may be of interest in a couple of cases:

- The case of access to federated resources in other EPs, where a resource server in one EP may be acting as an OIDC client of the Login Service in another EP – in which case auto-client-registration might be of interest.
- The case where a common Login Service is deployed outside of the context of a given Exploitation Platform, acting as an IdP Proxy. In this case, the local Login Service deployed in each EP would register as an OIDC Client of the IdP Proxy.
  - Applicable standards - [https://openid.net/specs/openid-connect-registration-1\\_0.html](https://openid.net/specs/openid-connect-registration-1_0.html)
  - Operations -

- Conveyed information
- Control and data flow descriptions
- Usage examples

The following endpoints relate to the establishment of a federation of collaborating Exploitation Platforms through a dynamic trust model:

URI: <https://iam.eoepca.org/.well-known/openid-configuration>

- Description - OIDC Federation API endpoint through which Entity Statements are published about itself and other entities (such as other Exploitation Platforms).
- Applicable standards
- Operations -
- Conveyed information
- Control and data flow descriptions
- Usage examples

#### **4.1.1.2. IAM information**

OICD ID token

The ID Token is a JWT that is returned from the /userinfo endpoint of the Login Service. The returned OICD ID Token has been signed (JWS) by the Login Service and thus results in a token that asserts a user's authenticated identity with integrity, and non-repudiation.

### **4.1.2. Accounting and Billing**

- Description of functionality
- Component diagram
- Link to building block documentation
- List of exposed interfaces

*Table 4. AB interfaces*

URL	Name
Cell 1 1	Cell 2 1
Cell 1 2	Cell 2 2

- List of services

#### **4.1.3. User profile**

- Description of functionality
- Component diagram
- Link to building block documentation

- List of exposed interfaces

*Table 5. UP interfaces*

<b>URL</b>	<b>Name</b>
Cell 1 1	Cell 2 1
Cell 1 2	Cell 2 2

- List of services

# Chapter 5. Processing and Chaining

The Processing & Chaining domain area must provide an extensible repository of processing functions, tools and applications (referred here generically as ‘processing services’) that can be discovered by search query, invoked individually, and utilised in workflows.

The Resource Management domain area provides the facilities through which processing services are published in an Application Catalogue that acts as a Marketplace and facilitates their discovery, (see section [Application Catalogue](#)). Via the Marketplace users have a single point of access to all processing services that are published across the federated system. In order to invoke processing services and workflows, users must specify the data inputs and parameterisation.

Users must be able to define and execute workflows that chain processing steps, in which the input(s) of a step are provided by the output of preceding step(s). Users can publish workflows as new processing services, and so the possibility of workflow nesting.

A workflow comprises multiple steps (processing service invocations), each of which can be executed on the platform that is closest to the data. Thus, the workflow must be orchestrated to invoke the steps on the appropriate platform and stage in/out the data between platforms along the execution pipeline. Thus, processing services should be relocatable between federated EO platforms, such that they can be deployed and instantiated for execution ‘close to the data’. This implies that applications are packaged in a way that is self-contained, standardised and agnostic of the underlying hosting technology.

Users must be able to develop and integrate their own processing services into the platform. Once integrated the user can publish their processing service so that it is discoverable by search query and available in the federated marketplace – and hence available for exploitation by other users, including use in workflows. In support of this, an integrated development environment should be provided that allows users to develop, test and debug their applications before submission.

The interface between the Processing Framework and the compute resource should be abstract so that the solution is not tied to any particular provider (cloud, DIAS, etc.).

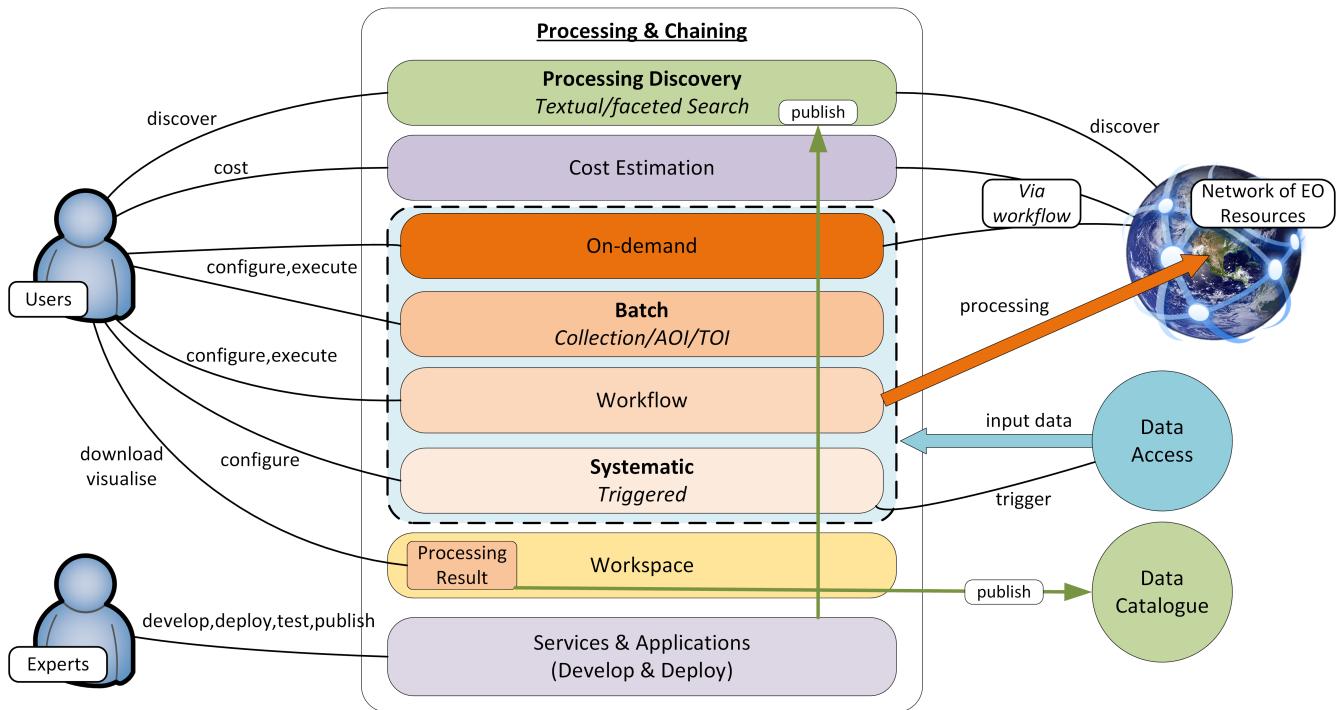


Figure 3. Processing & Chaining Use Case

In meeting these requirements the following key challenges are identified:

- Processing and data interoperability must be established through clear and consistent metadata definitions, to ensure that type mismatches are avoided. This is particularly challenging across federated systems where it becomes more difficult to enforce use of common profiles and vocabularies
- Defining an application packaging approach whose paradigm is easy to work with, whilst providing a rich environment that allows expert users to exploit the full compute capability of the platform
- Federation of processing services across the network of EO resources, such that processing implementations can be made available ‘on-demand’ amongst federated platforms, to facilitate the movement of the “processing to the data”. Use of a common packaging format that is agnostic of underlying host characteristics is key to this challenge
- Enforcement of access controls to processing and data resources through multi-step federated workflows requires the user’s ‘request context’ to be carried through all layers of the request fulfilment. At each point of resource access, the user’s identify and access rights must be asserted. The service interface standards, (such as WPS, CSW, WCS, etc.), must be evaluated and necessary enhancements identified to ensure that the user’s access envelope is respected

## 5.1. Solution Overview

The Processing & Chaining solution is based upon the work performed in the OGC Testbeds, described by the following Engineering Reports:

- OGC 17-023 - OGC Testbed-13, EP Application Package ER [[TB13-AP](#)]
- OGC 17-024 - OGC Testbed-13, Application Deployment and Execution Service ER [[TB13-ADES](#)]
- OGC 18-049r1 – OGC Testbed-14, Application Package Engineering Report [[TB14-AP](#)]

- OGC 18-050r1 - ADES & EMS Results and Best Practices Engineering Report [TB14-ADES]

Additionally, the current OGC Testbed-15 Thread-2 Earth Observation Process and Application Discovery (EOPAD).

Processing-services are packaged as Docker images, which can then be deployed as self-contained applications within the Exploitation Platform's processing framework. OGC-WPS provides a standard interface to expose all processing services (and workflows) for invocation by WPS clients.

Each processing service is described by an Application Descriptor, which is a file that accompanies its deployment to the processing framework of the EP. The Application Descriptor provides all the metadata required to accommodate the processor within the WPS service and make it available for execution.

The architecture is defined by the following main components:

### **Execution Management Service (EMS)**

WPS-T (REST/JSON) service that provides an umbrella orchestration service to deploy/invoke processing services within the ADES of the appropriate (close to data) Exploitation Platform. Thus, the EMS is responsible for the orchestration of workflows, including the possibility of steps running on other (remote) platforms, and the on-demand deployment of processors to local/remote ADES as required.

### **Application Deployment and Execution Service (ADES)**

WPS-T (REST/JSON) service that incorporates the Docker execution engine, and is responsible for the execution of the processing service (as a WPS request) within the ‘target’ Exploitation Platform (i.e. one that is close to the data). The ADES relies upon the EMS to ensure that the processor is deployed as a WPS service before it is invoked.

### **Application Catalogue (ref. Resource Management domain)**

An Application Catalogue provides an inventory of processing services that acts as a Marketplace for the discovery and browse for processing services. The Application Catalogue provides a service that can be searched by facet/keyword and provides supporting metadata and information.

Thus, each platform that supports processing should include an ADES, and each platform that supports workflow orchestration should include an EMS.

[Figure 4](#) illustrates the main architecture components and their interfaces.

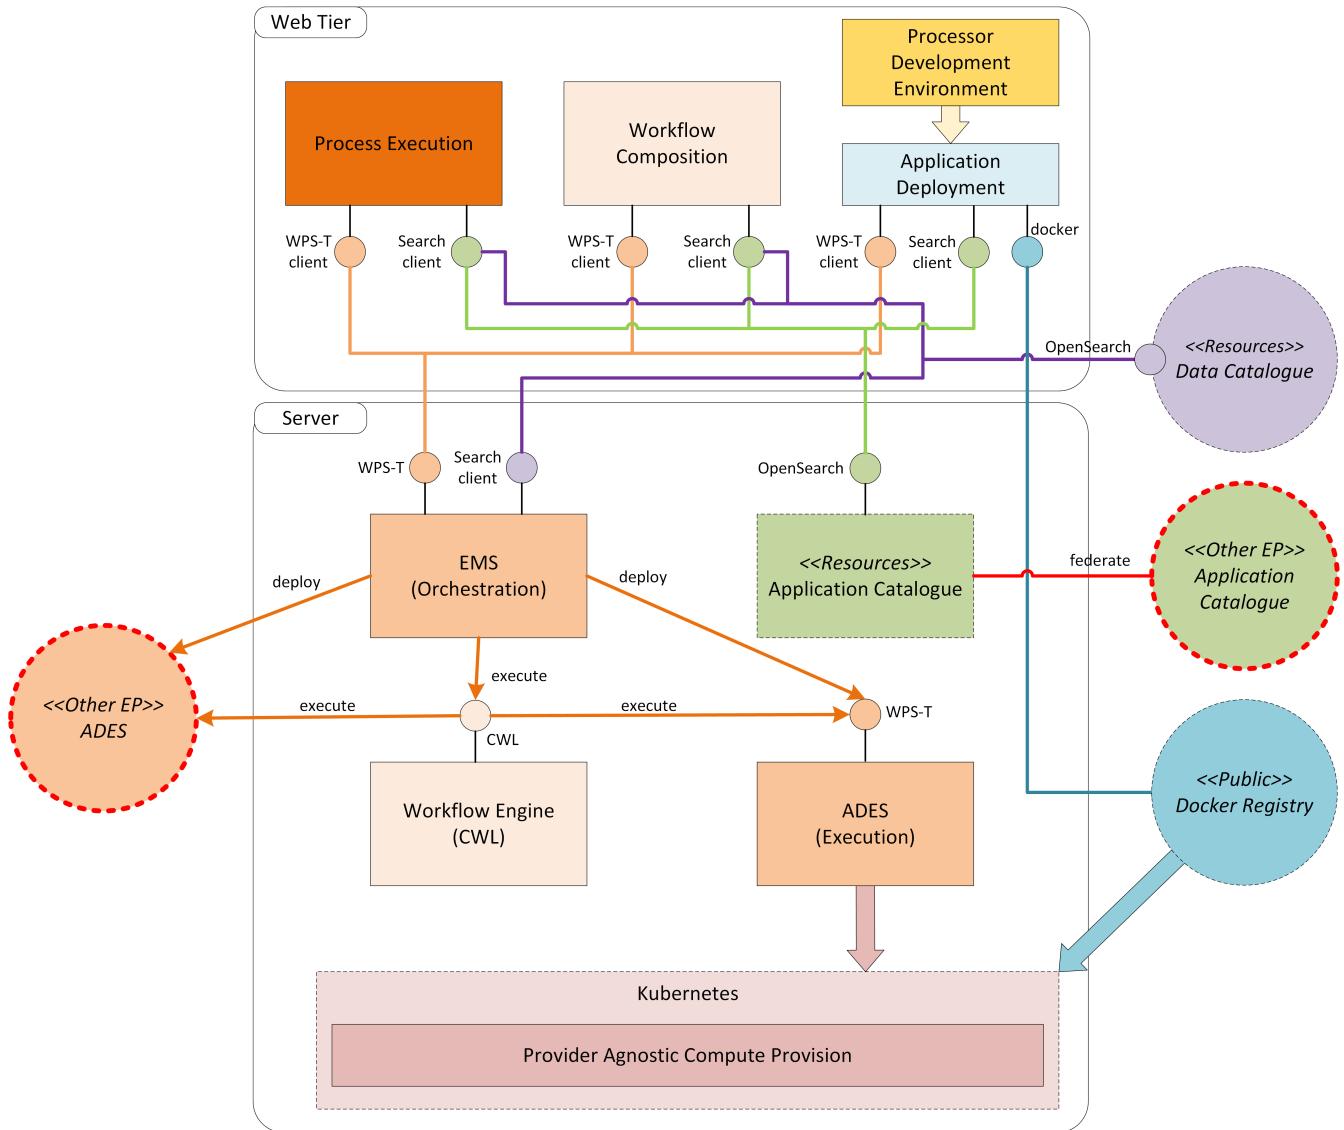


Figure 4. Processing & Chaining Overview

In order for processing services and their data input/outputs to be aligned a formalism is required to describe the data types for M2M consumption. This is required to ensure that a processor is invoked with compatible data inputs, its outputs are understood, and that coherent workflows can be constructed in which the outputs → inputs are aligned. For this purpose, Common Workflow Language (CWL) is used in the Application Package Description to describe the processor input/outputs.

The Application Catalogue is the subject of the current Testbed-15 through which the Data Model and catalogue Service Interface are being explored.

For the Expert User with a service/application to execute in the EP, we might consider three levels of integration:

- **Importing**

The service/application is packaged (unchanged) as a black-box.

Relies upon the stage-in/out of data to the applications existing data access expectations by the Processing Framework.

- **Adapting**

The service/application is adapted (modified) to use the data access interfaces offered by the

Common Architecture.

- **Porting**

The service/application is ported to use the services of the EP intrinsically - typically by use of the [Client Library](#) defined by the common architecture.

*Section [Processing Service Data Access](#) provides further discussion regarding the data stage-in/out approach for processing services.*

## 5.2. Resource Layer (Infrastructure) Interface

The Processing & Chaining has significant points of interface with the hosting infrastructure for provision of scalable compute resource and access to data for input/output. The definition of this interface should be agnostic of the infrastructure provider onto which the Exploitation Platform is deployed.

Kubernetes provides an infrastructure abstraction layer that allows the EP to be architected in a way that is agnostic to the underlying hosting infrastructure – the only requirement being the existence of a K8s cluster in which to deploy and run the platform. This abstraction provides points of interface for:

- System deployment
- Access to back-end data
- Execution of processing services and applications

Thus, the Processing & Chaining solution is designed to utilise a Kubernetes Cluster, whose API provides the means to invoke the WPS processing services as docker containers, and also provides the means to support stage-in/out of data for the process execution.

This has particular impact on the ADES, as described in [\[ADES\]](#).

## 5.3. Application Packaging

The Application Package provides a platform independent and self-contained representation of a software item, providing executable, metadata and dependencies such that it can be deployed to and executed within an Exploitation Platform. Typically, in the context of the exploitation platform, the application is an EO data processing algorithm or a workflow.

The Application Package allows the application to be exchanged in an interoperable way on any platform within the EP ecosystem. Additionally, the developer of the package need only concern themselves with conformance to the package specification and need not concern themselves with the infrastructure details of any particular EP.

The Application Package comprises two main parts:

- Application Descriptor - metadata descriptor file
- Application Artefact – i.e. the ‘software’ component that represents to the execution unit

In accordance with the approach advocated in OGC Testbed-14 (ref. [\[TB14-ADES\]](#)), the Application

Descriptor is encoded in accordance with the WPS-T DeployProcess document defined by WPS-T JSON encodings (ref. [\[WPS-REST-JSON\]](#)). In this way, the Application Descriptor broadly provides the following details:

- A link to the application execution unit
- A description of the application's inputs and outputs
- Other auxiliary information

Currently supported are two types of application execution unit:

1. Docker container
2. Workflow, expressed in CWL

...but the design of the application package should be extensible to support future types.

The Application Descriptor must address the needs of at least two types of users:


### Application Developers

Who may not be IT experts (such as scientists), requiring an encoding that is simple enough for them to create for themselves

### Machine-To-Machine (M2M)

Requiring all the information to ensure that the application is fully portable and will behave the same on all supporting platforms

[Figure 5](#) provides an illustration of the Application Descriptor structure.

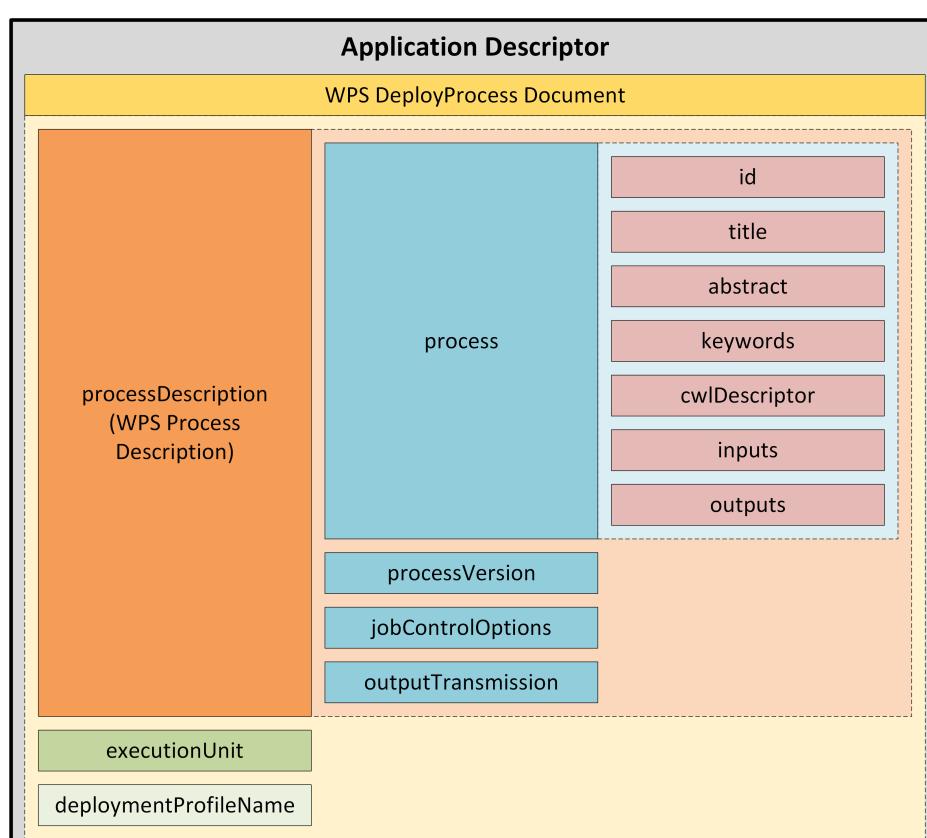

*Figure 5. Structure of Application Descriptor data model*

Thus, the WPS-T DeployDocument comprises the following parts:

### **processDescription (WPS Process Description (WPD))**

Corresponds to a WPS Process Description document encoded in JSON, including details such as process ID, name, title, etc. as well as options to describe the job invocation and the output handling.

Additional points of note:

- cwlDescriptor

The cwlDescriptor provides a CWL formatted (YAML) workflow definition of the application. This aids the stage-in/out of data by providing a CWL definition of the input/outputs of the application, and is given in addition to the inputs/outputs included in the body of the WPD. This entry is included as an extension to the WPD via an owsContext offering.

*Note that this is not required for the Execution Unit type of ‘workflow’ which already carries its CWL file in its executionUnit parameter.*

- inputs/outputs

Specifies the number and types of the data input/outputs. Provided as part of the WPD, and in addition to the contents of cwlDescriptor.

The inputs can be provided as references to data, accessible through data access service endpoints, or can be specified as query parameters collection/AOI/TOI.

### **executionUnit**

Specifies the ‘software’ item to be executed, within the context of the deploymentProfileName, as follows:

- dockerizedApplication

executionUnit specifies the URL of the docker image to run.

- workflow

executionUnit specifies the URL of the CWL file that defines the workflow.

### **deploymentProfileName**

Enumerates the type of the executionUnit. Currently supported:

- Docker image (<http://www.opengis.net/profiles/eoc/dockerizedApplication>)
- CWL Workflow (<http://www.opengis.net/profiles/eoc/workflow>)

#### *Example Application Descriptor*

```
{  
  "processDescription": {  
    "process": {  
      "id": "EoepcaProcessor",  
      "title": "EOEPCA Processor",  
      "owsContext": {  
        "offering": {  
          "code": "http://www.opengis.net/eoc/applicationContext/cwl",  
          "content": {  
            "href": "https://eoepca.github.io/processor/cwl/EOEPCAProcessor.cwl"  
          }  
        }  
      }  
    }  
  }  
}
```

```

        },
        "abstract": "",
        "keywords": [],
        "inputs": [
            {
                "id": "images",
                "title": "Input Images",
                "formats": [
                    {
                        "mimeType": "application/zip",
                        "default": true
                    }
                ],
                "minOccurs": 1,
                "maxOccurs": "unbounded",
                "additionalParameters": [
                    {
                        "role": "http://www.opengis.net/eoc/applicationContext/inputMetadata",
                        "parameters": [
                            {
                                "name": "EOImage",
                                "values": [
                                    "true"
                                ]
                            }
                        ]
                    }
                ]
            }
        ],
        "outputs": [
            {
                "id": "output",
                "title": "Stacked Image",
                "formats": [
                    {
                        "mimeType": "image/tiff",
                        "default": true
                    }
                ]
            }
        ]
    },
    "processVersion": "1.0.0",
    "jobControlOptions": [
        "async-execute"
    ],
    "outputTransmission": [
        "reference"
    ]
}

```

```

        ],
      },
      "executionUnit": [
        {
          "href": "hub.docker.com/oeopca/processor:latest"
        }
      ],
      "deploymentProfileName": "http://www.opengis.net/profiles/eoc/dockerizedApplication"
    }
  ]
}

```

## 5.4. Execution Management Service (EMS)

The EMS provides a Transaction WPS 2.0 (WPS-T) interface, with REST/JSON encodings, as described in section [WPS-T REST/JSON](#).


WPS-T extends standard WPS by adding DeployProcess and UndeployProcess operations. Once a process has been deployed to a WPS then the existing wps:Execute operation remains applicable for execution in the standard way.

The EMS provides a WPS-T (REST/JSON) interface that provides an umbrella orchestration service to deploy/invoke processing services within the ADES of the appropriate (close to data) Exploitation Platform. Thus, the EMS is responsible for the orchestration of workflows, including the possibility of steps running on other (remote) platforms, and the on-demand deployment of processors to local/remote ADES as required.

The description in this section refers to the WPS operations: GetCapabilities, DescribeProcess, Execute, GetStatus, GetResult, DeployProcess, UndeployProcess. See [WPS-T REST/JSON](#) for a mapping of these operations into the REST/JSON encoding.

The EMS provides the endpoint for the user's web client, through which applications and workflows are deployed to the EMS to make them available for execution.

[Figure 6](#) illustrates the deployment of applications and workflows to the EMS.

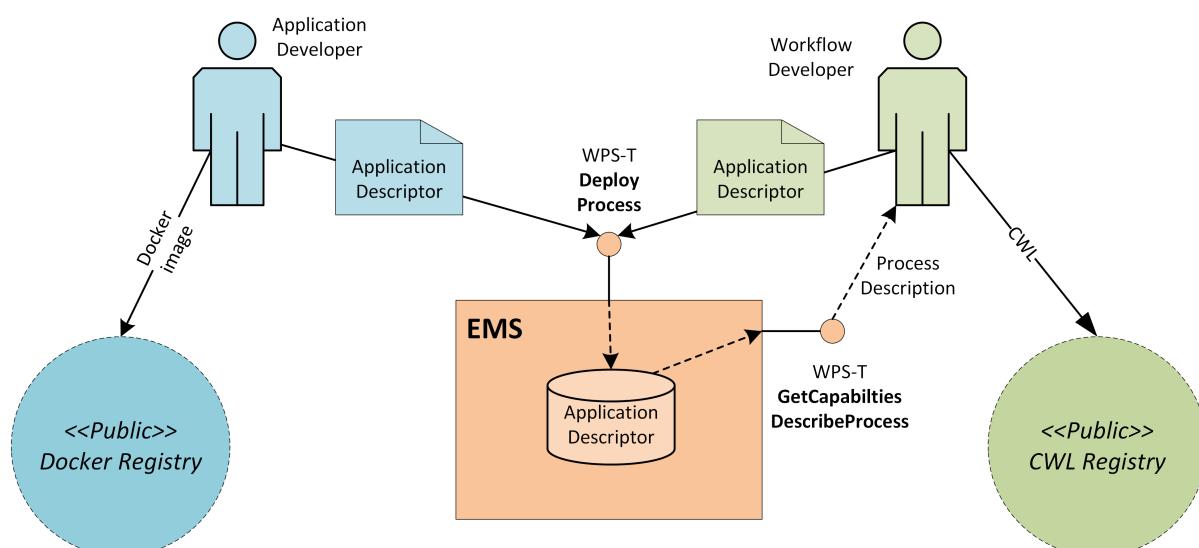


*Figure 6. EMS Deployment*

Applications are deployed to the EMS so that they are available for inclusion in workflows.

Workflows are deployed to the EMS where the steps of the workflow reference applications that are known to the EMS.

As illustrated in [Figure 7](#), the EMS orchestrates the workflow execution by invoking the steps as subordinate invocations of wps:Execute at the ADES identified at time of task invocation. The EMS uses wps-t:DeployProcess on the target ADES to ensure that the process is registered before execution.

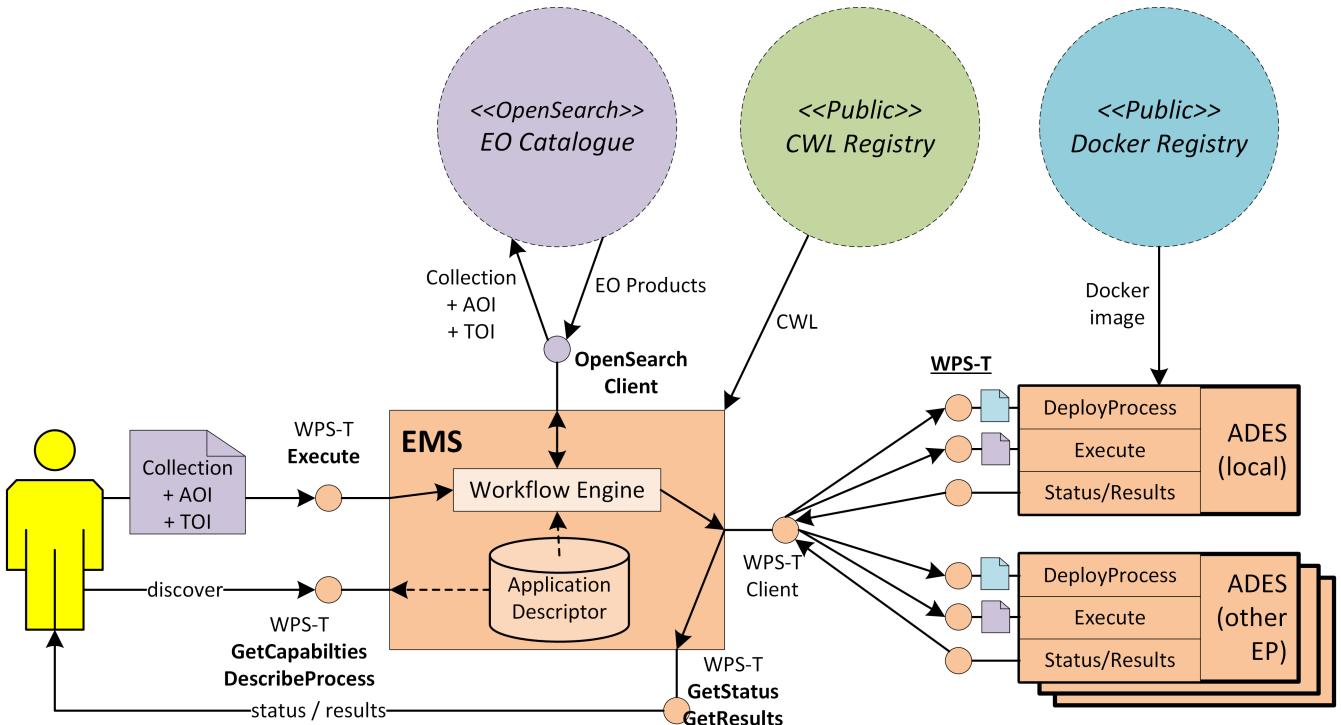

*Figure 7. EMS Workflow Execution*

At time of [wps:Execute](#) the input data must be specified by the invoking user. Two possibilities are currently identified, both of which should be supported by EMS:

1. Direct URL references to specific data products, accessible through data access service endpoints (such as WCS, WFS, etc.)
2. OpenSearch query parameters that identify the data characteristics as a combination of Collection/AOI/TOI

In case 1) the EMS can simply pass-through the input arguments to the ADES WPS-T.

In case 2) the EMS must resolve the input data by OpenSearch catalogue queries with the provided parameters. The OpenSearch catalogue end-point can either be defined by the application (in its Application Descriptor), or defined as a parameter of the [wps:Execute](#).

In either case, the end result is that the EMS resolves the input specification to a set of data products URLs that can be passed on to the ADES for execution.

The EMS requires a means to determine the target platform (ADES) for the execution, i.e. typically the one closest to the data. In the case of the OGC Testbeds, this determination was made as a one-to-one mapping from the collection identified in the input data specification. If collections are

identified to be globally unique, e.g. with a namespace prefix that identifies the hosting platform, then this assertion can be reliably made and the target ADES can be derived from the collection ID. Otherwise, the `wps:Execute` must be parameterised suitably to identify the target ADES.

Performing the orchestration between steps, the EMS must handle the stage-in and stage-out of data. In the simple case, the result URL returned from a step can be directly used as an input URL for the subsequent step. Use of CWL and the accompanying `cwl-runner` tool should facilitate this orchestration.

The end result of the successful execution is to present the output result to the invoking user. The EMS establishes the location of the results within the storage provision of the Exploitation Platform, and interfaces with the EP Workspace component ([Workspace](#)) to register the result in the user's workspace. At this point the WPS execution is complete as reported by the `wps:GetStatus` and `wps:GetResult`.

## 5.5. Application Deployment and Execution Service (ADES)

The ADES provides a WPS-T (REST/JSON) service that incorporates the Docker execution engine, and is responsible for the execution of the processing service (as a WPS request) within the ‘target’ Exploitation Platform (i.e. one that is close to the data). The ADES relies upon the EMS to ensure that the processor is deployed as a WPS service before it is invoked.

The main responsibilities of the ADES are:

- Check the user is authorized to access the requested data
- Perform stage-in of data before execution
- Invoke the container from the Docker image in accordance with the ApplicationDescriptor and the `wps:Execute` request
- Monitor the status of the job and obtain the results
- Perform stage-out of results at execution conclusion

[Resource Layer \(Infrastructure\) Interface](#) introduces the use of Kubernetes (K8s) as the provider agnostic interface to the Resource Layer. The ADES has touch-points with the Resource Layer for access to data and compute resource. The following sub-sections elaborate the approach.

The work carried out in the OGC Testbeds 13/14, performed the execution of the ‘packaged’ processing service by invoking the ‘run’ of a docker container in the machine that hosts the WPS-T service. The Common Architecture design builds upon this, by instead invoking the container as a K8s Job that is deployed for execution in the K8s cluster.

This approach is consistent with the current Application Package / ADES definition that specifies a docker image for the processing service. As illustrated in [Figure 8](#), the ADES provides a K8s-aware Execution Engine that handles the complexities of constructing the jobs and interfacing with the K8s cluster.

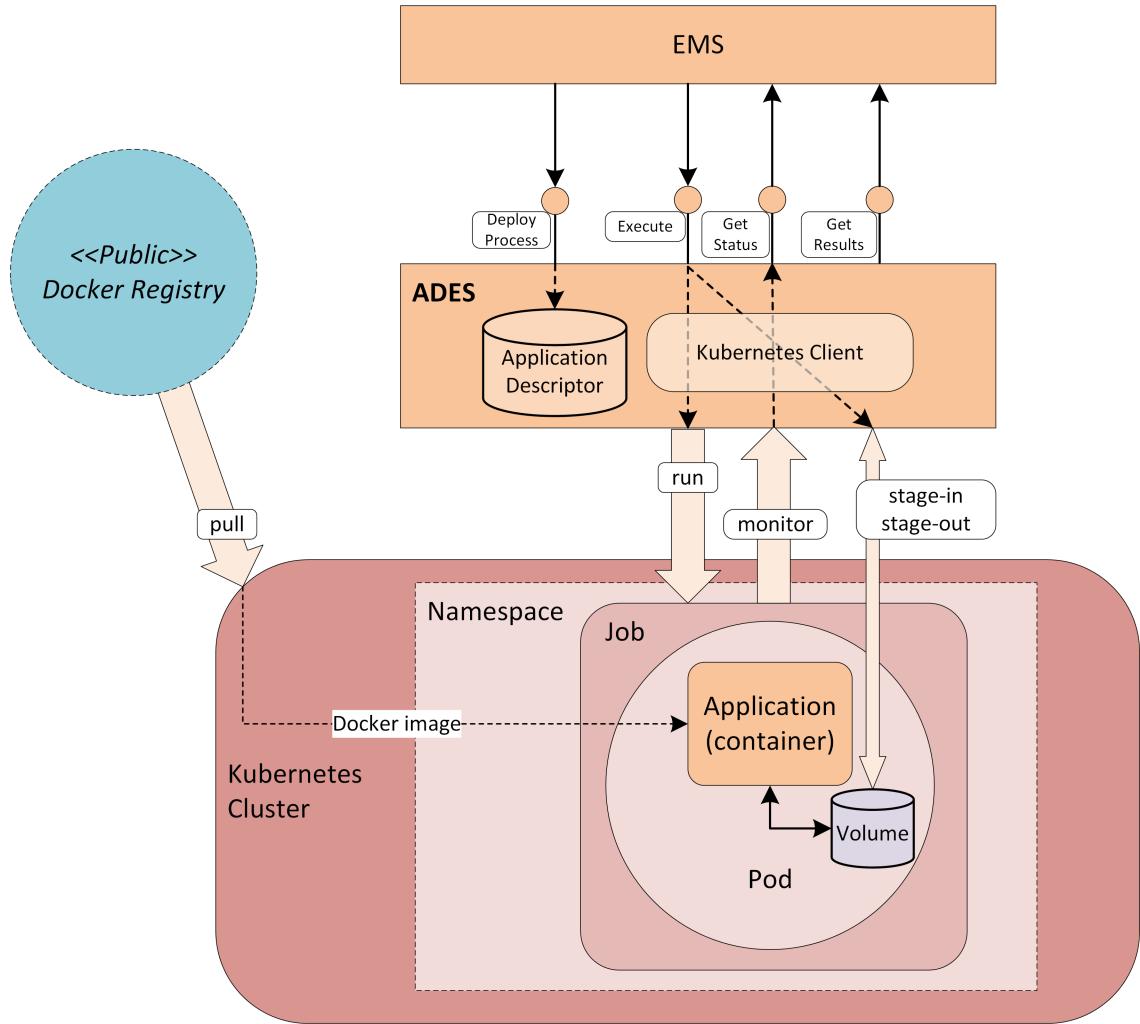


Figure 8. ADES Process Execution

A Kubernetes cluster comprises a set of Nodes. A Node is a worker machine in Kubernetes and may be either a virtual or a physical machine. Each Node is managed by the Master. A Node can have multiple pods, and the Kubernetes master automatically handles scheduling of the pods across the Nodes in the cluster. The Master's automatic scheduling takes into account the available resources on each Node.


Pods are the atomic unit on the Kubernetes platform. A Pod is a Kubernetes abstraction that represents a group of one or more application containers. A Pod always runs on a Node. The containers in a Pod share an IP Address and port space, are always co-located and co-scheduled, and run in a shared context on the same Node.

Each WPS processing task will be constructed as a Pod and invoked as a dedicated K8s Job. A Job creates one or more Pods to perform a given task. The Job object takes the responsibility of Pod failures. It makes sure that the given task is completed successfully. Once the task is over, all the Pods are terminated automatically.

Kubernetes provides Namespaces, which are an abstraction that supports multiple virtual clusters on the same physical cluster. It may be interesting to explore the use of K8s Namespaces for the purpose of establishing a sandboxed execution environment for each task execution.

## 5.6. Processing Service Data Access

The Processing Framework (EMS/ADES) provides the environment through which processing services and workflows access input/output data. The EMS must ensure that the outputs of one step are marshalled to the next, and the ADES must prepare the inputs before job invocation, and collect the outputs at the job conclusion. The processing task is invoked as a Docker container. In doing so, the container execution environment must be provisioned with the input data for the task, and with the means to ‘export’ its outputs to the processing orchestration. Figure [Figure 9](#) illustrates.

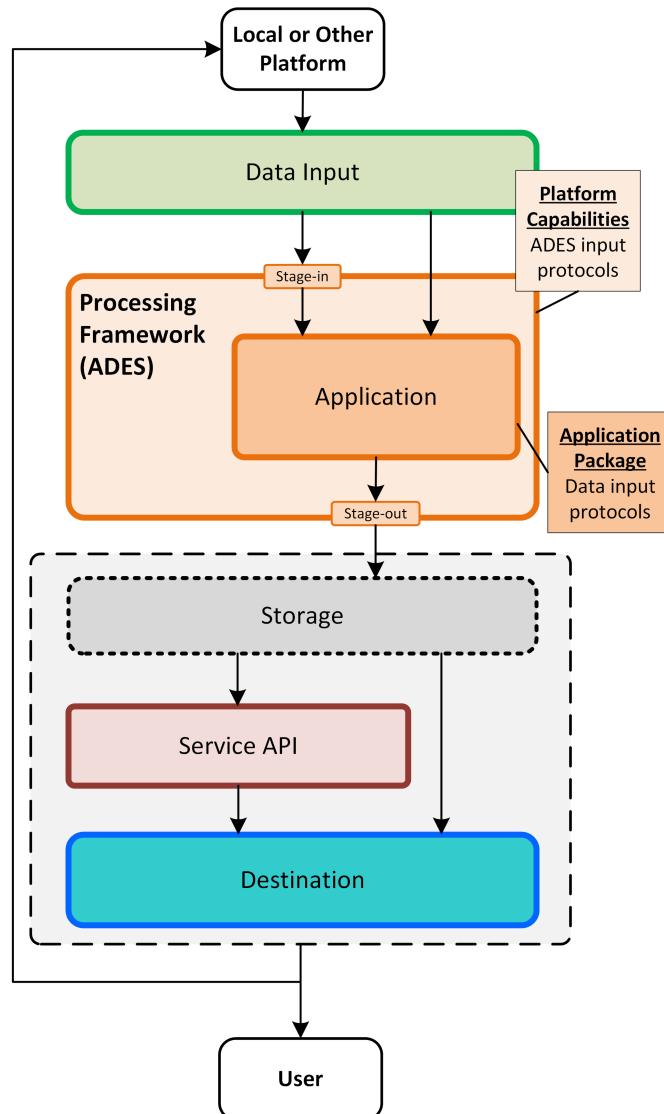

*Figure 9. Processing Framework Data Access*

### Data Input Sources

The data input sources may be the local exploitation platform, or output from a previous workflow step (local or other platform).

### Data Input Protocol

The data input protocol may be natively supported by the processing service - otherwise it will need to be staged-in by the Processing Framework.

### Data Stage-in

In order to stage-in the data, the Processing Framework must support the data access protocol

through which the input data is provided, and it must know the capabilities of the processing service to be invoked. **This represents a two-way contract between the Platform (on behalf of the Processing Framework) and the service/application being executed.** Options for staging-in the data include local file-system access (e.g. via s3fs-fuse mount), or it may be more optimal for the service to access the data directly via HTTP-based interfaces, e.g. to exploit the efficiencies offered by cloud-optimised file formats.

## Data Stage-out

The ADES stages-out the results from the service/application.

The EMS orchestrates the outputs to the next workflow step, or makes available the results to the end-user.

## Data Output Protocol

The data output protocol must be supported by the data destination. The retrieval of the output data is facilitated by use of simple approaches that can be encoded in an HTTP-base URL, such as HTTP GET/KVP or Object Store.

## Data Output Destination

The data output destination is either the EMS/next-process for a workflow, or the end-user receiving their results. The two-way Platform (Processing Framework) ↔ Service/Application contract informs this data flow, with the workflow construction/orchestration taking into account the respective capabilities of the service/application and the platform in which it is being invoked.

The work carried out in the OGC Testbeds 13/14 relied upon use of mounted volumes within the processing task docker container. These mounted volumes present the input data, and receive the output data, as 'local' file system access from the point of view of the running container and the processor running within. Use of mounted volumes is equivalently supported by K8s, and is an approach that is relied upon for many (existing) applications that are capable only of accessing data through POSIX file-system interfaces.

Thus, for Mounted Volumes, the approach is to use standard container volumes that present as well-identified directories within the container. The input data is provided in a read-only input directory that mounts into the container hosting infrastructure. Similarly, an empty writable directory is presented for the processing to write its outputs, to be collected by the Processing Framework.

Nevertheless, we might envisage that access to the underlying data will be provided by the hosting platform through a variety of data access protocols, including: Object Store (S3/Swift), OGC (WMS, WMTS, WFS, WCS, WCPS), OPeNDAP, plus local file-system as mentioned above.

The processing framework must establish an environment in which the data access capabilities of the processing service are matched to the data access offering of the platform. There are two possibilities that need to be handled by the Processing Framework:

1. The processing service / application natively supports the data access protocol, in which case there is no need to stage-in the data. Nevertheless, the Processing Framework must support the pass-through of input data as URL, and the reception of the output(s) as URL. This is facilitated by the utilisation of a [Data Access Library](#) as described below. Also, it must be ensured that any

outputs, e.g. to object store, are appropriately directed.

2. The processing service / application does not natively support the data access protocol(s) offered by the underlying platform storage, e.g. the processing service only supports local storage (mounted volume), in which case the Processing Framework must facilitate access to the data on behalf of the processing service.

In cases where the processing service does not natively support the data access protocols offered by the underlying platform, the processing framework must facilitate access to platform data in a form that can be consumed by the processing service.

To support this, the service/application should declare the data access protocol that it requires. This declaration should be made in the Application Descriptor (ref. Application Package), and is selected from a standard set of protocols, including:

- AWS S3 Object Store
- Swift Object Store (OpenStack)
- OGC data access services:
  - Web Map Service (WMS)
  - Web Map Tile Service (WMTS)
  - Web Feature Service (WFS)
  - Web Coverage Service (WCS)
  - Web Coverage Processing Service (WCPS)
- OPeNDAP
- Mounted Volume (local storage)

Building upon the work of OGC Testbed-14 (ref. [\[TB14-AP\]](#)), the Application Descriptor described in section [Application Packaging](#) can be enhanced to include additional application capabilities, as illustrated in [Figure 10](#).

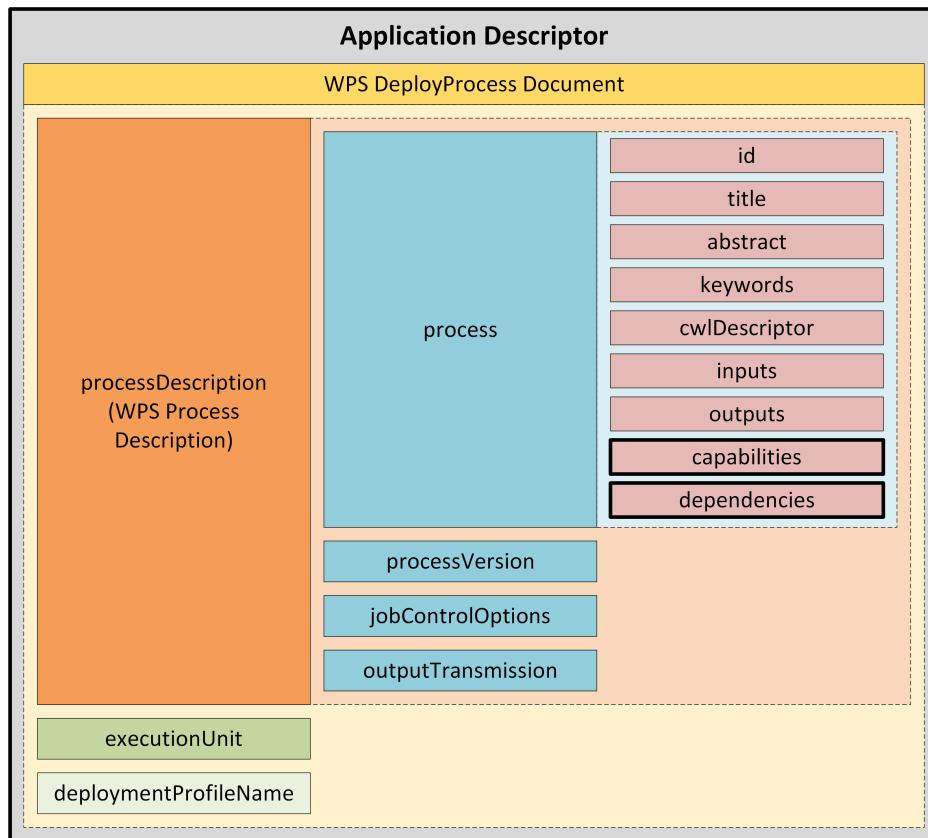


Figure 10. Application Descriptor (Enhanced)

The Application Descriptor is enhanced with additional components:

- **Capabilities**

Containing, for example, data access protocols supported, (implicitly 'local filesystem' for OGC Testbeds 13/14).

- **Dependencies**

Specifying, for example, required interfaces to a specific processing, such as dask/Spark etc.

***The 'Platform Capabilities' are elaborated in section [Platform Capabilities](#).***

The platform implementation must then ensure that the data interface is presented to the processing container in accordance with its descriptor. It is the job of the platform implementation to translate from the back-end data access protocol to that required by the container. There are a number of techniques that can be employed by the processing framework to facilitate this data access mediation:

#### Local File-system Stage-in/out

The processing framework must perform the data retrieval to stage-in the data for presentation through a mounted volume as local file-system access. At the conclusion of the processing the outputs must be marshalled into the appropriate platform storage for further consumption, e.g. push to object store.

The approach can be facilitated by use of a FUSE file-system driver to achieve the mediation.

#### Use of Filesystem in Userspace (FUSE)

Access to the back-end data storage (e.g. HTTP-based) is provided through a user-space driver that presents the remote data as if it were a local directory. For example, using s3fs-fuse

(<https://github.com/s3fs-fuse/s3fs-fuse>), access to data in an S3 object store is provided through a FUSE mounted directory. Thus, from the perspective of the processing task, inputs (read) and outputs (write) are accessed through the local file-system interface – satisfying the constraints of the processor.

## Use of Data Access Library

A Data Access Library (DAL) provides an abstraction of the interface to the data. The library provides bindings for common languages (including python, Javascript) and presents a standard programmatic semantic for accessing the data from within the processing service codebase. Specific implementations of the DAL can be made to abstract the data access layer for a given Exploitation Platform. The Processing Framework must support the ability to 'plugin' an alternative implementation of the DAL at processor execution time.

See section [Data Access Library](#).

## Data Access Gateway

Access to the underlying platform data is provided through a common service layer that provides standard data access interfaces that are translated (gateway) to those of the underlying data tier.

For example, to satisfy a processing service that requires an S3 interface, but is executed in an environment where the data is available through a POSIX file system. Minio (<https://github.com/minio/minio>) is an open source object store implementation that overlays an S3 interface over a POSIX file system.

See section [Data Access Gateway](#).

### 5.6.1. User Authorization Context

The stage-in/out of data must operate within the context of the user's 'account'. Thus, the security context of the user must be passed through all aspects performed by the Processing Framework on behalf of the user. This is necessary to ensure that the user is only able to access data to which they are entitled and accounting & billing considerations are properly maintained.

## 5.7. WPS-T REST/JSON

This interface specification is used for both the Client  $\leftrightarrow$  EMS, and the EMS  $\leftrightarrow$  ADES interfaces.

WPS-T extends standard WPS by adding *DeployProcess* and *UndeployProcess* operations. Once a process has been deployed to a WPS then the existing *wps:Execute* operation remains applicable for execution in the standard way.

The following table is reproduced from [\[TB14-ADES\]](#).

<b>Resource</b>	<b>HTTP Method</b>	<b>Description</b>	<b>WPS operation</b>
/	GET	The landing page provides links to the API definition, the Conformance statements and the metadata about the processes offered by this API	
/processes	GET	Retrieve available processes	Get Capabilities
/processes	POST	Deploy a process	Deploy Process
/processes/{id}	GET	Retrieve a process description	Describe Process
/processes/{id}	DELETE	Undeploy a process	Undeploy Process
/processes/{id}/jobs	GET	Retrieve the list of jobs for a process	
/processes/{id}/jobs	POST	Execute a process	Execute
/processes/{id}/jobs/{jobID}	GET	Retrieve the status of a job	GetStatus
/processes/{id}/jobs/{jobID}	DELETE	Dismiss a job	
/processes/{id}/jobs/{jobID}/result	GET	Retrieve the result(s) of a job	GetResult
/processes/{id}/quotations	GET	Retrieve the list of quotation ids for a given process	
/processes/{id}/quotations	POST	Request a quotation for a given process	
/processes/{id}/quotations/{quotationID}	GET	Retrieve quotation information	
/processes/{id}/quotations/{quotationID}	POST	Execute a quoted process	
/processes/{id}/visibility	GET	Retrieve the visibility status for a process	
/processes/{id}/visibility	PUT	Change the visibility status for a process	
/quotations	GET	Retrieve the list of all quotation ids	

Resource	HTTP Method	Description	WPS operation
/quotations/{quotationID}	GET	Retrieve quotation information	
/quotations/{quotationID}	POST	Execute a quoted process	
/bills	GET	Retrieve the list of all bill identifiers	
/bills/{billID}	GET	Retrieve bill information	
/conformance	GET	list all requirements classes specified in the standard (WPS REST/JSON Binding Core) that the server conforms to	

## 5.8. Interactive (Graphical) Applications

The work carried out in the OGC Testbeds focused on non-graphical applications, i.e. non-interactive processing functions executing algorithms without intervention. It is also noted that WPS does not facilitate the invocation of GUI-based interactive applications which offer a synchronous experience to the end-user.

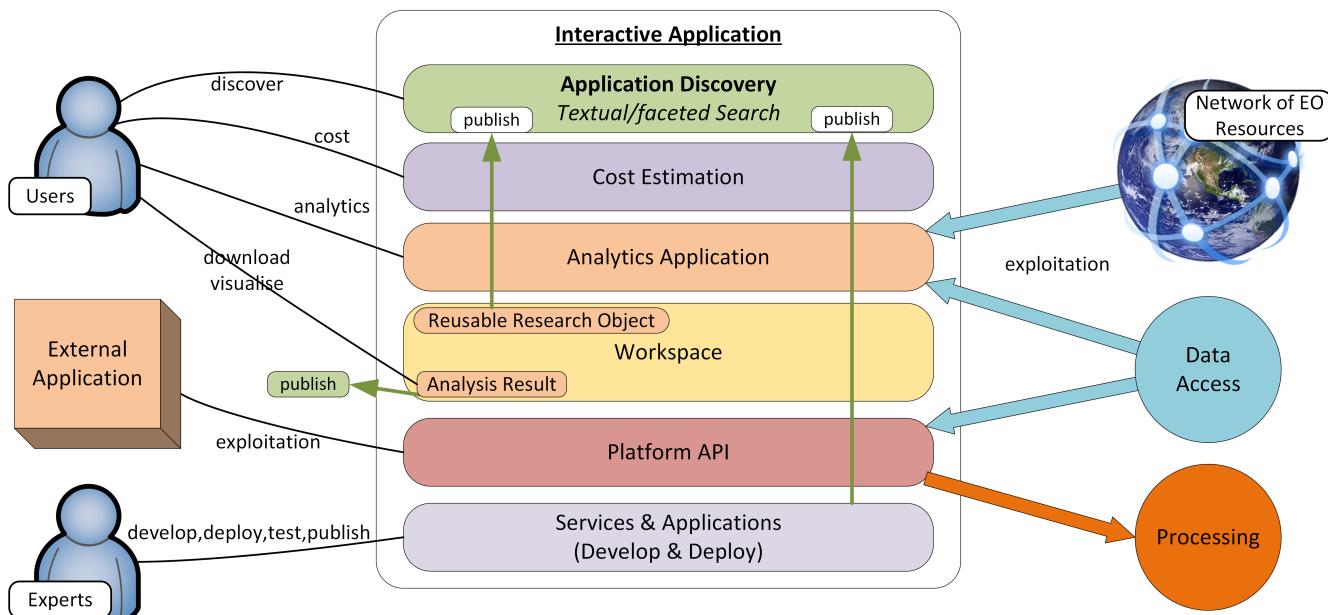


Figure 11. Interactive Applications Use Case

That said, the approach to application packaging undertaken in the testbeds does lend itself to the packaging of GUI-based applications, which can be packaged, deployed and executed as docker containers, including:

### Native applications

A remote desktop (RDP) approach is used to present the interface to the user, typically rendered through a web page presented in the user's browser

## Web applications

The web application is delivered through the portal interface of the hosting exploitation platform.

In both cases, docker containers offer a good solution to package and deploy the application. At execution time it is necessary to ensure that the appropriate ports are exposed from the running container.

The Application Descriptor needs to be extended to:

- Introduce additional `deploymentProfileNames` and `executionUnit` types
- Provide parameterisation to support the delivery of the GUI to the end-user
- Ensure that data access is presented within the container in a way that is compatible with the GUI application (the mechanisms provided for non-interactive applications may be sufficient).

## 5.9. Parallel Processing

The OGC Testbeds 13/14 only consider serial processing jobs running in a single Docker container. Here we consider how this approach can be extended to accommodate job requiring parallelisation.

One possible approach, is to invoke the processing task as a docker container (as described above), but then within the implementation of this task it makes subordinate invocations that exploit some specific data processing clustering infrastructure available within the platform. For example, the invoked process executes some Python code that then invokes a dask or SLURM cluster to perform the processing work.

In this case, the processing task would have a dependency that the Exploitation Platform provides the required data processing technology. In order to resolve this capability dependency the following approach can be made:

- The processing service declares within its Application Deployment Package, that it ‘requires’ a particular service
- The Exploitation Platform declares within the capabilities document output from its WPS endpoint, that it ‘provides’ particular services
- The EMS must ensure that the target EP provides the required service of the processing task to be invoked
- The parameterisation for the ‘required’ service are passed to the processing task at invocation

A consistent vocabulary of services must be defined to unambiguously express the ‘required’ and ‘provides’ declarations.

## 5.10. Processor Development Environment (PDE)

The Processor Development Environment provides a rich, interactive environment in which processing algorithms and services can be developed, tested, debugged and ultimately packaged so that they can be deployed to the platform and published via the marketplace.

The PDE supports the packaging of the user's application in accordance with the Application Packaging format that is suitable for deployment at the EMS/ADES. It provides a sandboxed environment in which the user can test the deployment and execution of their packaged application, with access to suitable test data to perform the validation.

The PDE provides the tools for the developer to fully specify the metadata for their validated application and then add it as a tool in their workspace and/or publish it to the Resource Catalogue for wider consumption.

## 5.11. Interactive Analysis Tool

The Interactive Analysis Tool presents a hosted coding environment through which expert users can interact directly with the data and services of the platform. It should provide support for a variety of coding languages, including those most popular in the community – Python, R, Julia, Javascript.

For example, the Interactive Analysis Tool can be provided as a Jupyter Notebook instance that is provisioned in the user's context with a 'platform integration' layer that provides simple access to platform resources, including resources held within the user's Workspace.

It must be integrated with the platforms authentication and authorization scheme in accordance with the IAM approach described by the User Management domain.

The Interactive Analysis Tool should support the user to save their interactive analysis sessions for future resumption and sharing with others for purposes of collaboration.

# Chapter 6. Resource Management

The role of the Resource Management domain is the storage, discovery and access to resources in the Exploitation Platform. In this context, resources primarily refers to data and processing assets.

Storage is largely taken care of by the Resource Tier upon which the Exploitation Platform is hosted. The role of the Exploitation Platform is to ensure that the data can be accessed through common data access protocols based upon open standards.

This is important for:

- the end-user wishing to access data directly, and accessing their results after processing
- processing services accessing data for input/output
- processing workflow steps accessing intermediate outputs from prior steps
- other federated Exploitation Platforms accessing each other's data and services through well understood interfaces

To exploit the services of the Platform, users need to discover available resources and obtain detailed resource information. For example, a user's data discovery workflow should include the ability to view collection/product information and visualise the data in the platform - this applies to data held within the platform, data added by end-users and data produced as the result of processing operations within the platform.

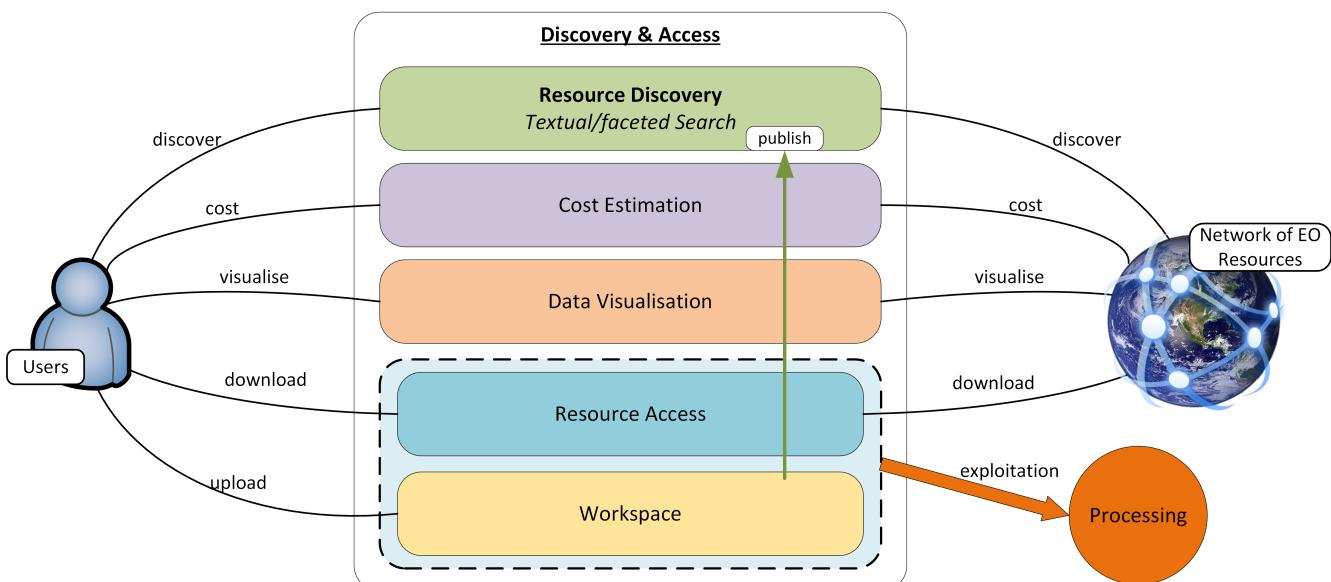


Figure 12. Resource Management Use Case

Processing services and applications are also platform resources that are stored in artefact repositories and must be discoverable by users, including the information required by users to exploit the service. It is assumed that users will store their software artefacts in external public repositories such as DockerHub, GitHub, etc. In the future, it may be necessary for an Exploitation Platform to provide such repository services to its users. Discovery of processing services and applications is met through the provision of an [Application Catalogue](#).

The inventory and presentation of resources to users must be organised in such a way as to facilitate the discovery and usage of resources in other federated Exploitation Platforms. For

example, users must be able to discover data and services in other EPs in order to construct and execute workflows that span multiple federated EPs. **Thus a Resource Catalogue provides the inventory of data, processing services, applications in such a way as to create a Marketplace for resource discovery, and provide a launchpad for their use within the exploitation platform.**

Access to resources must be controlled according to the privileges afforded to the logged in user, and appropriate hooks must be established into the EPs accounting and billing subsystems. Thus, the Resource Management services must be implemented according to the approach defined by User Management for authorization, accounting and billing.

In addition to the resource holding of the underlying resource tier, the EP maintains a User Workspace in which each user is able to maintain specific data/services of interest to them, and also provides a place to hold results of processing operations. The User Workspace should be provided as a building block of the system that provides this personal inventory. Moreover, the concept can be extended to define Group Workspaces to create a place for sharing and collaboration.

A Data Ingestion component abstracts the interface to the underlying Resource Tier storage, ensures that incoming data is formatted in accordance with defined standards, is supported by appropriate metadata and directed towards the appropriate dataset collection.

The main components comprising the Resource Management domain are illustrated in [Figure 13](#):

- Resource Catalogue
- Data Access Services
- Data Access Gateway
- Data Access Library
- Data Ingestion
- Workspace

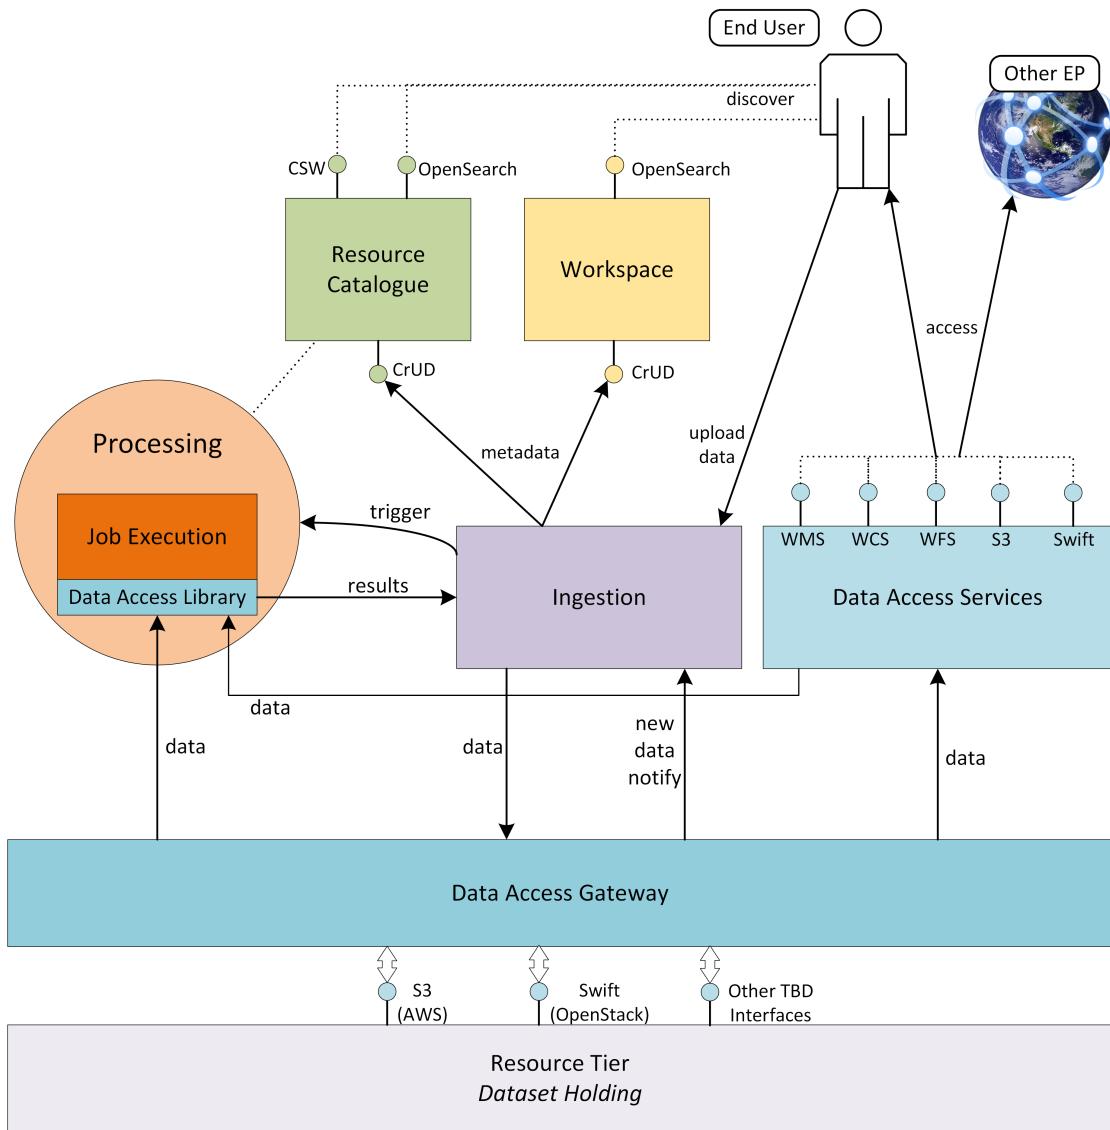


Figure 13. Resource Management Overview

To some degree, the role of these components is to provide an integration of the Exploitation Platform to the Resource Tier, by providing public services that bridge to the underlying data supply.

## 6.1. Resource Catalogue

The Catalogue provides the user the capability to discover resources, (including data/products/services/applications), by browse/search, and to obtain details on specific resources discovered. Resources of different type can be catalogued and delivered through the same service architecture and catalogue service interfaces - provided as a consolidated catalogue service, or through discrete services for each resource type. In each case the catalogue provides an inventory of resources that can be presented as a *Marketplace* for users to discover and browse.

Perhaps the most challenging aspect of this is that the Catalogues for both Data and Processing-Services must facilitate the proper construction of processing tasks, to ensure there is a correct match of the data types expected as input to the processing. This extends into the construction of workflows where the data types output by a processing task must match the supported inputs of the next task in the chain. The Catalogue must have a rich and consistent metadata model for both Data and Processing-Services in order to achieve these goals.

### 6.1.1. CEOS OpenSearch Best Practise

The Common Architecture advocates standardisation on the use of OpenSearch based-upon the CEOS OpenSearch Best Practise [\[CEOS-OS-BP\]](#) which provides a blueprint for catalogue search and discovery. Within this context, the following OGC extensions and recommendations are applicable:

- OpenSearch GEO: OpenSearch Geo and Time Extensions [\[OS-GEO-TIME\]](#)
- OpenSearch EO: OGC OpenSearch Extension for Earth Observation [\[OS-EO\]](#)

In addition, the possibility to use the JSON-LD processing model might be considered (further analysis required) through application of:

- OGC EO Dataset Metadata GeoJSON(-LD) Encoding Standard [\[GEOJSON-LD\]](#)
- OGC OpenSearch-EO GeoJSON(-LD) Response Encoding Standard [\[GEOJSON-LD-RESP\]](#)

### 6.1.2. Application Catalogue

Processing services are published in an Application Catalogue that acts as a Marketplace and facilitates their discovery. Via the Marketplace users have a single point of access to all processing services that are published across the federated system. In order to invoke processing services and workflows, users must specify the data inputs and parameterisation. The metadata for each application record describes what data an application can be applied to, and how it can be chained in a workflow.

The Application Catalogue is the subject of the current OGC Testbed-15 EOPAD Thread, through which the Data Model and catalogue Service Interface are being explored. Thus, in addition to the best practise identified above, the outcomes of the TB15 EOPAD thread should be taken into consideration:

- **OGC 17-084 (GeoJSON(-LD) metadata encoding for EO collections) [\[GEOJSON-LD\]](#)**  
Explore the capabilities of OGC 17-084 to encode application metadata
- **OGC 17-047 (OGC OpenSearch-EO GeoJSON(-LD) Response Encoding Standard) [\[GEOJSON-LD-RESP\]](#)**  
Explore the capabilities of OGC 17-047 to encode OpenSearch responses in GeoJSON(-LD)  
Use of multi-step discovery and faceted search
- **Registration**  
Explore transactional extension to OGC-CSW for application registration.

It is anticipated that the outcome of the OGC Testbed-15 (EOPAD) will further inform the design of the Application Catalogue.

### 6.1.3. Data Catalogue

The Catalogue provides the user the capability to discover data/products by browse/search, and to obtain details on specific data/products discovered. The Marketplace concept can be extended to embrace the discovery and access to data.

### **6.1.3.1. Metadata Organisation**

The data is organised into Collections, typically representing a dataset. Each collection is composed of multiple granules as files. The catalogue metadata follows a similar organisation and allows the user to discover the data in natural sympathy with this data organisation. Hence, the metadata is presented at the following levels:

#### **Browse Metadata (collection)**

Browse metadata is defined at the collection/dataset level. It typically uses ISO19115 records to describe the high-level collection information, such as title, description, spatial/temporal coverage, list of variables available, access rights, T&Cs, etc.  
(For collections, the spatial coverage is often full-earth).

#### **Discovery Metadata (product)**

Discovery metadata is defined for each granule (file) comprising the collection. This typically includes information such as file-type(s), spatial/temporal coverage, variable, data access (download) method(s). Much of this information can be obtained from the headers of the individual files – depending on file-type. Thus, the Discovery metadata can in-part be populated automatically from the underlying files.

#### **Archive Metadata (file)**

Archive metadata refers to the information that is available in the file header. As described above this can be extracted and published into the Discovery metadata of the catalogue.

### **6.1.3.2. Example Usage with OpenSearch**

This metadata model can be exploited, for example, using OpenSearch:

- Initial search is made at the collection level to discover collections/dataset of interest.
- Subsequent OpenSearch requests can then be made to drill-down into a specific collection to discover and obtain details regarding the granules.
- Once discovered, the granules can then be exploited by the user, for example as input to a processing request, or downloaded.
- Facets can be applied to both the Browse and Discovery metadata, to support faceted search at both levels.

### **6.1.3.3. Data Access**

There is a direct link between the way the data is described in the Catalogue and how it is accessed by the consumers of the data. This links to the Data Access Services (e.g. WMS, WCS, WFS, etc.) provided by the EP, and the way in which the access links are encoded into the Catalogue. These links must be usable by the data consumers which could be processing services, or users downloading the data.

Hence the contents of the Catalogue reflects the data services offered by the platform, including the underlying resource tier services. Each data Collection is presented in the Catalogue as accessible through one or more data access services, as applicable to the specific data. The Catalogue must present the data access URLs in such a way that the URL resolves correctly to the underlying data

via the providing data access service.

#### 6.1.3.4. Catalogue Composition/Aggregation

The Exploitation Platform is designed to be hosted in a compute environment that is close to the data of interest. This means that the typical deployment is made to the likes of DIAS, Public Cloud (such as AWS), or National Research Infrastructure (such as CEDA/JASMIN) – that provide the Resources-tier/infrastructure upon which the EP relies. The Resources-tier provides virtual ICT-infrastructure and data. It is common that the Resources-tier provides their own Catalogue to support the data hosted within.

In order to ensure a coherent link between data discovery and access, the Exploitation Platform provides its own Catalogue that presents the data holding to be accessed through the available data access services. In doing so it must aggregate the catalogue records of the underlying resource tier, the records of other 'federated' platforms, and the value-added data that is contributed through the actions of users on the EP. Thus the EP provides a Catalogue that is tailored to its service offering to ensure a consistent data access interface that can be relied upon by other EP services, in particular by the executing user analysis functions running within the Processing & Chaining context.

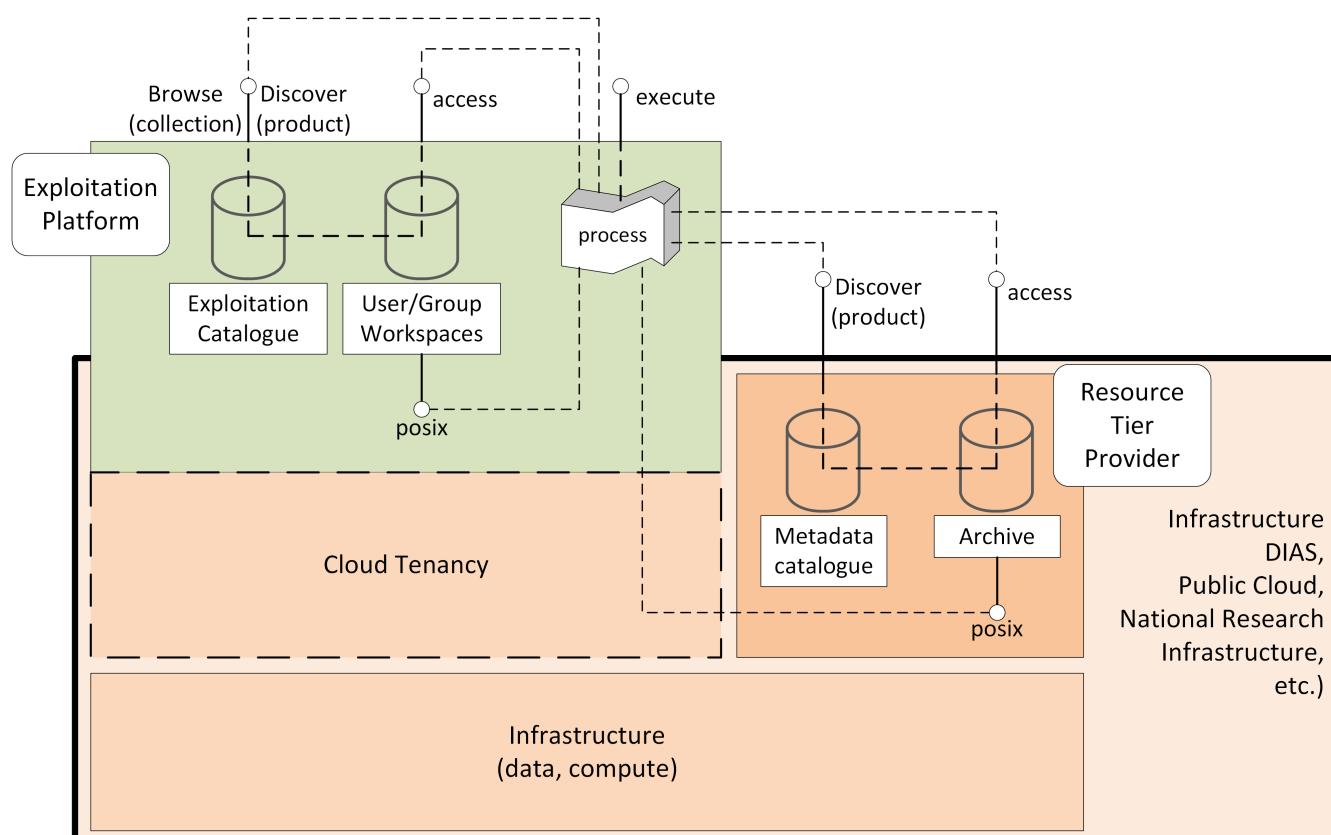


Figure 14. Catalogue Aggregation

We wish the exploitation platform to expose a public catalogue that provides both the Browse (collection) and Discovery (product) views:

- In the case where the Resource-tier provides these in a way that is conformant with the architecture then these can be relied upon directly for the exploitation platform
- In the case where the Resource-tier provides only a suitable Product catalogue, then the Collection catalogue must be provided by the EP, with the granule queries being directed to the back-end catalogue. Alternatively, this could be achieved by harvesting the Resource-tier

product catalogue into the EP catalogue.

- Alternatively, the EP may provide a Catalogue-shim to ensure that an existing Resource-tier catalogue conforms to the interface demands of the open architecture
- Otherwise, the EP must provide all catalogue aspects.

The important point is to ensure that the EP presents interfaces that conform to its defined open standards, and is able to take measures to ensure this is the case. From the perspective of the user of the Exploitation Platform a single Data Catalogue end-point is most desirable. The EP web interface can present a consolidated user view in the case of multiple catalogue end-points. A similar consolidation approach can be applied by the EP programmatic API, which can present a single end-point on behalf of the back-end data catalogues.

#### 6.1.4. Federated Discovery

In order that a user is able to discover data/services of interest in a federated network of Exploitation Platforms, an approach to Catalogue federation must be established between collaborating platforms.

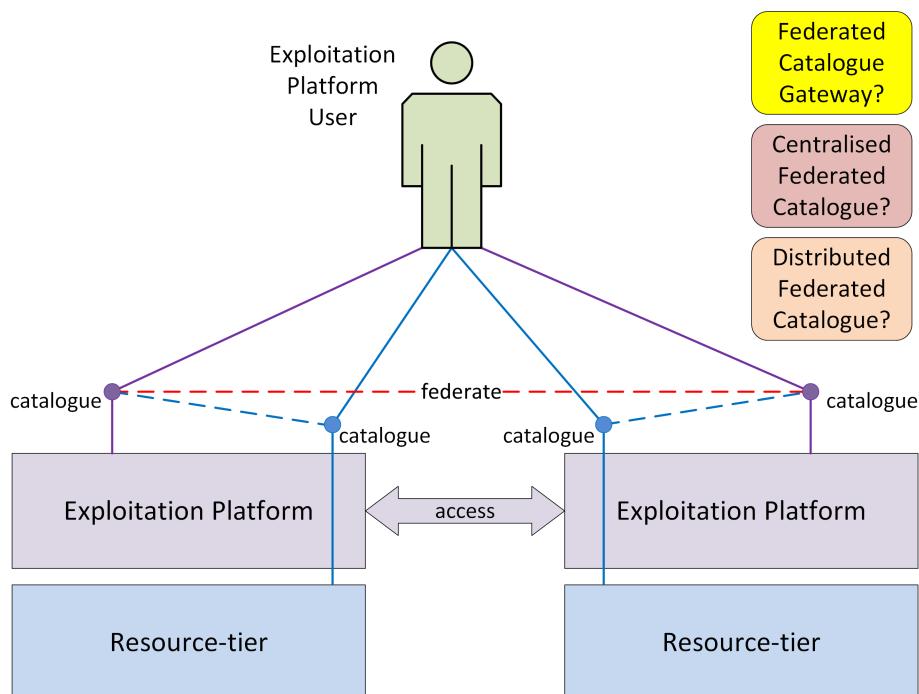


Figure 15. Catalogue Federation

As illustrated in Figure 15 there are a number of possible approaches:

- Gateway – A central proxy
- Centralised – Central mirror
- Distributed - Catalogues mirror each other

Further analysis is required to understand these options, their applicability and impact on the Common Architecture.

## 6.2. Data Access Services

The Exploitation Platform provides access to data through public services based upon Open Standards, for the consumption by end-users and other federated platforms.

The primary services provided by an Exploitation Platform should include:

- OGC Web Map Service (WMS)
- OGC Web Map Tile Service (WMPS)
- OGC Web Feature Service (WFS)
- OGC Web Coverage Service (WCS)
- OGC Web Coverage Processing Service (WCPS)
- Services provided by Resource Tier:
  - AWS S3 Object Store
  - Swift Object Store (OpenStack)

Other services that may also be considered include:

- WebDAV
- FTP
- CDMI

Integration of these data access services with the data-layer of the hosting Resource Tier relies upon the Data Access Gateway providing an infrastructure agnostic interface for accessing the underlying data holding.

## 6.3. Data Access Gateway

The EO datasets are stored according to the underlying storage technology of the infrastructure Resource Tier. The storage interface presented is not under the control of the Exploitation Platform.

The role of the Data Access Gateway is to provide an abstraction layer on top of the underlying storage to present a well-defined storage interface to the other components of the Exploitation Platform.

The main EP components that require data access are:

- Processing services and applications: stage-in/out of data/results
- Platform Data Access Services (WMS,WCS,etc.): access to datasets
- Ingestion: storage of ingested data

In the EP system ICD, these services are designed to be deployed as containers through Kubernetes. This presents the possibility that some aspects of the Data Access Gateway can be met by the facilities offered by Kubernetes volumes. Access to underlying data is provided through volumes that are mounted into the container. Kubernetes volumes have native support for a number of

common storage technologies (such as AWS EBS, Cinder), however these tend to be block rather than object storage.

The Gateway must provide a data bridge between the EP components and the Resource Tier. It fills the gap in the data access capabilities of a given service/application, and provides a common data access interface that such components can target in their implementation. We might regard the lowest-common-denominator for data access to be a combination of:

- Local filesystem access
- AWS S3 Object Store

Through docker/kubernetes we can use mounted 'volumes' to present data through a local filesystem interface.

Through s3fs-fuse we can establish local filesystem mount points to S3 object stores.

The Processing Framework makes use of these capabilities to ensure that data is presented to processing services/applications in a form that they can consume.

Thus, the Data Access Gateway presents an S3 interface as an internal data access abstraction, whilst implementing the data access interface to the infrastructure Resource Tier storage.

## 6.4. Data Access Library (DAL)

In addition to the Data Access Gateway, which operates as an internal service, the Data Access Library (DAL) is provided specifically as a point of integration for processing services and applications. The Data Access Library provides an abstraction of the interface to the data, with bindings for common languages (including python, R, Javascript) and presents a standard programmatic semantic for accessing the data from within the processing service codebase.

*The Data Access Library can be seen as a subset of the facilities offered by the [Client Library](#).*

The Data Access Library can provide an abstraction at two levels:

### Protocol abstraction

Standard programmatic semantics are provided for accessing the data (i.e. CRUD operations on data granules), that is agnostic of the underlying platform storage data access protocols. This is a lower level interface that should be applicable to all use cases.

### Data Model abstraction

A common object model is defined with programmatic semantics, which provides a higher-level abstraction of the data that hides the details of the underlying storage, files and file-formats. The abstraction accesses and parses the underlying data to present data structure representations within the language bindings. Such an object model would likely be applicable to some, but not all, use cases. In cases where this approach is not applicable, then protocol abstraction provides the fall-back option.

Thus, processing services and applications can be implemented in a 'portable' way that is agnostic to the platform resource-tier storage technology.

Specific implementations of the DAL can be made to abstract the data access layer for a given

Exploitation Platform. The library offered to the processing service at runtime must implement the specific data access interface to the resource-tier storage. Hence, the library should not be 'hard-coded' into the processor application package (Docker image). The Processing Framework must support the ability to 'plugin' an alternative (platform-specific) implementation of the DAL dynamically at processor execution time. It may be possible to develop a 'generic' Data Access Library by implementation against the standard (internal) interface provided by the Data Access Gateway. In this case, the platform-specifics regarding data access are borne entirely by the Data Access Gateway.

See also section [Processing Service Data Access](#) which provides a discussion of data access approaches for processing services and the stage-in/out of data.

## 6.5. Data Ingestion

Data Ingestion presents a standard interface to the EP components, whilst transparently interfacing with the infrastructure Resource Tier.

During data ingestion the following steps may be performed:

- Authorization check
- Quota check
- Metadata extraction
- Preview generation
- Format conversion
- Storage PUT
- Catalogue PUT
- Trigger notifications

Ingestion raises notifications for the following events:

- Raise indicators to users (visual, emails, etc.)
- Trigger systematic actions in other EP services (e.g. systematic processing)

## 6.6. Workspace

The Workspace provides a service to users through which they can organise data/processing-services that are of current interest to them, they are currently working on, and to organise results of processing executed, Research Objects, etc.

This concept can be extended to create a Group Workspace for sharing and collaboration.

It may be possible to model the Workspace as a Catalogue, in which the browse/discover access privilege is limited to either an individual user (personal workspace) or a group of collaborating users (group workspace):

- READ access: OpenSearch should provide a good fit for this interface

- CREATE/UPDATE/DELETE: Transactional extension to OGC-CSW (to be explored)

# Chapter 7. Platform API

The Platform API defines standard interfaces at both service and programmatic levels, with the goal of encouraging interoperation between platforms and providing a consistent and portable programming paradigm for expert users. The Service API and its associated Client Library together present a standard platform interface against which analysis and exploitation activities may be developed, and through which platform services can be federated.

The Service API represents the public service interfaces exposed by the Exploitation Platform for consumption by its clients. Covering all aspects of the EP (authentication, data/processing discovery, processing etc.), these interfaces are based upon open standards and are designed to offer a consistent EP service access semantic within the network of EO resources. Use of the network (HTTP) interfaces of the Service API is facilitated by the Client Library that provides bindings for common languages (Python, R, Javascript). The Client Library is a programmatic representation of the Service API which acts as an abstraction of the Exploitation Platform and so facilitates the development of portable client implementations.

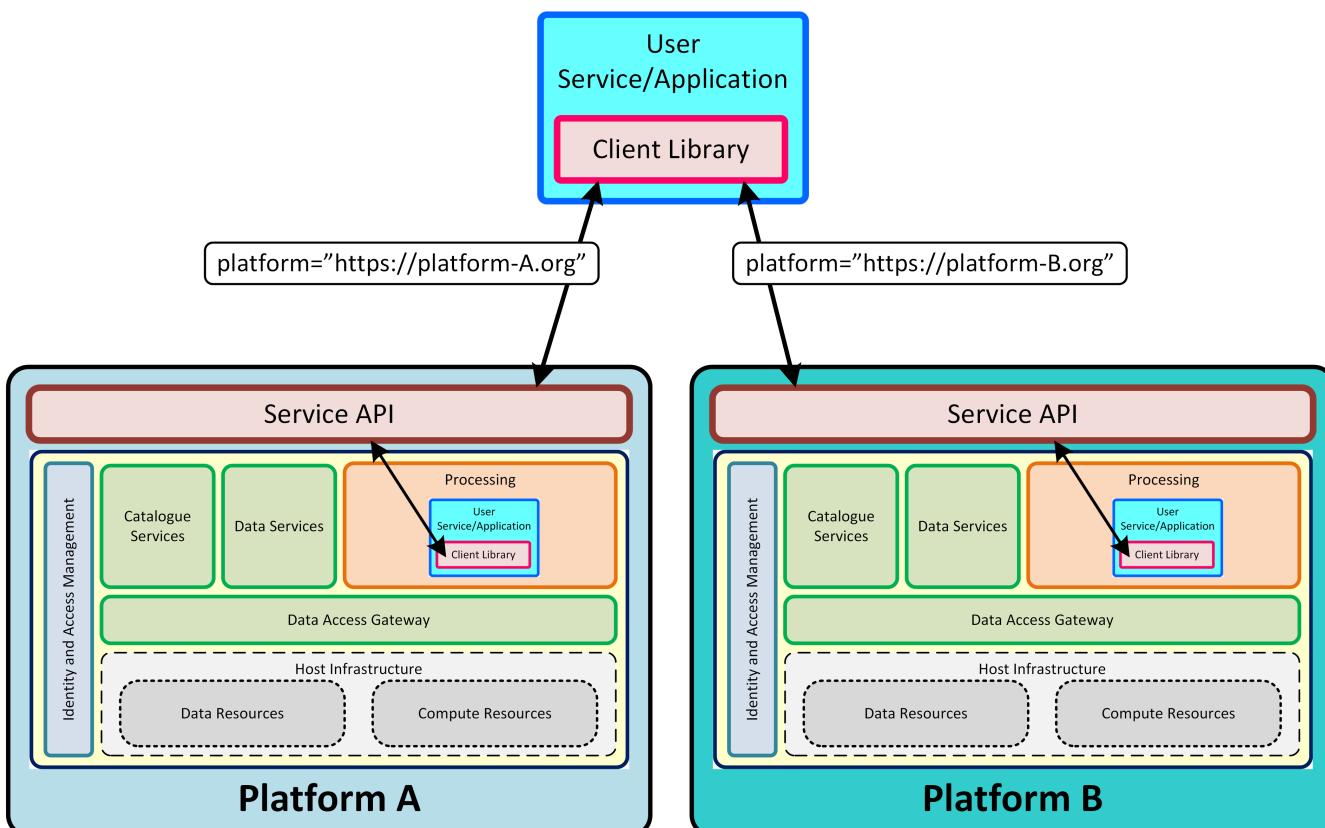


Figure 16. Client Portability

As illustrated in Figure 16, code implemented against the Client Library is not tied to a particular Exploitation Platform, but instead can be initialised and executed against any EP that supports the corresponding Service API. The User Service/Application shown in the figure can either be a process running external to the platform (e.g. on the users local platform), or running as a deployed process within the Processing Framework of the platform. **It should be noted that the use of the Client Library is not mandatory - instead the application can be developed against the Service API directly.**

## 7.1. Service API

The Service API presented by the Exploitation Platform is largely defined and met by the fundamental data/processing services it offers. There are some additional meta-services that support the clients in the discovery and usage of these core services. The Service API defined in this section seeks to define a standard set of interfaces against which the Client Library can be developed and that can be relied upon for platform-to-platform interoperability.

### 7.1.1. Platform Capabilities

Provides a single well-known 'bootstrap' URL through which the service capabilities and their endpoints can be discovered:

- Declare platform capabilities
- Discover service endpoints
- Core platform data/processing services
- Additional meta-services to support clients
- Used by [Client Library](#) to initialise its platform interfaces
- Used by [EMS](#) to match service/application dependencies with platform capabilities
- Used by other platforms to establish interoperability

#### **.well-known/oeepca-platform**

*Example Platform Capabilities*

```
{  
    "services": [  
        { "type": "oidc", "role": "authentication", "path": "/connect" },  
        { "type": "<tbd>", "role": "billing", "path": "/billing" },  
        { "type": "opensearch", "role": "data_search", "path": "/search" },  
        { "type": "csw", "role": "data_catalogue", "path": "/catalogue" },  
        { "type": "opensearch", "role": "app_search", "path": "/applications" },  
        { "type": "wms", "role": "map", "path": "/map" },  
        { "type": "wmts", "role": "tile", "path": "/tile" },  
        { "type": "wfs", "role": "feature", "path": "/feature" },  
        { "type": "wcs", "role": "coverage", "path": "/coverage" },  
        { "type": "wcps", "role": "datacube", "path": "/datacube" },  
        { "type": "s3", "role": "object_store", "path": "/storage" },  
        { "type": "wps-t", "role": "ems", "path": "/ems" },  
        { "type": "wps-t", "role": "ades", "path": "/ades" },  
        { "type": "<tbd>", "role": "workspace", "path": "/workspace" }  
],  
}
```

The endpoints referenced in eoepca-platform are described in the following sections.

### 7.1.2. authentication

The URL of the OpenID Connect Provider that implements the [\[mainLoginService\]](#) for user authentication.

**/connect** (example)

Implements the OpenID Connect protocol as described in [\[OIDC\]](#).

### 7.1.3. billing

The URL of the endpoint of the Billing service in the platform.

**/billing** (example)

The Billing service provides a centralised point of contact within the platform responsible for tracking and billing for usage of resources and services. The approach to billing is currently not defined, but will be documented in section [\[mainBilling\]](#).

### 7.1.4. data\_search

The URL of the OpenSearch interface to the [Data Catalogue](#).

**/search** (example)

Implements an OpenSearch interface in accordance with section [Resource Catalogue](#).

### 7.1.5. data\_catalogue

The URL of the OGC CSW (Catalogue Services for the Web) interface to the [Data Catalogue](#).

**/catalogue** (example)

Implements an OGC CSW catalogue in accordance with standard **OGC Catalogue Services 3.0 Specification - HTTP Protocol Binding** as defined in [\[OGC-CSW\]](#).

### 7.1.6. app\_search

The URL of the OpenSearch interface to the [Application Catalogue](#).

**/applications** (example)

Implements an OpenSearch interface in accordance with section [Application Catalogue](#).

### 7.1.7. map

The URL of the OGC WMS (Web Map Service) interface that supports the data maintained in the [Data Catalogue](#).

## **/map** (example)

Implements an OGC WMS service in accordance with standard **OGC Web Map Server Implementation Specification** as defined in [\[OGC-WMS\]](#).

### **7.1.8. tile**

The URL of the OGC WMTS (Web Map Tile Service) interface that supports the data maintained in the [Data Catalogue](#).

## **/tile** (example)

Implements an OGC WMTS service in accordance with standard **OGC Web Map Tile Service Implementation Standard** as defined in [\[OGC-WMTS\]](#).

### **7.1.9. feature**

The URL of the OGC WFS (Web Feature Service) interface that provides a *Feature-oriented* access to the underlying data holding of the platform.

## **/feature** (example)

Implements an OGC WFS service in accordance with standard **OGC Web Feature Service 2.0 Interface Standard – With Corrigendum** as defined in [\[OGC-WFS\]](#).

### **7.1.10. coverage**

The URL of the OGC WCS (Web Coverage Service) interface that provides a *Coverage-oriented* access to the underlying data holding of the platform.

## **/coverage** (example)

Implements an OGC WCS service in accordance with standard **OGC Web Coverage Service (WCS) 2.1 Interface Standard - Core** as defined in [\[OGC-WCS\]](#).

### **7.1.11. datacube**

The URL of the OGC WCPS (Web Coverage Processing Service) interface that provides a queryable 'data cube' interface to multi-dimensional coverage data.

## **/datacube** (example)

Implements an OGC WCPS service in accordance with standard **Web Coverage Processing Service (WCPS) Language Interface Standard** as defined in [\[OGC-WCPS\]](#).

### **7.1.12. object\_store**

The URL of the *Amazon S3* interface that provides object storage access to the underlying data holding of the platform.

## **/object\_store** (example)

Implements an Amazon S3 service in accordance with **Amazon Simple Storage Service REST API** as defined in [\[AWS-S3\]](#).

#### *Amazon S3 Compatibility Subset*

For the purposes of this interface, a subset of the full Amazon S3 REST API will be defined as mandatory. The motivation is to define a consistent interface that is supported by third-party object storage implementations that provide an S3-compatible API, such as:



- Ceph (<https://ceph.com/ceph-storage/>)
  - CEPH OBJECT GATEWAY S3 API (<http://docs.ceph.com/docs/mimic/radosgw/s3/>)
- OpenStack Swift (<https://docs.openstack.org/swift/>)
  - S3/Swift REST API Comparison Matrix ([https://docs.openstack.org/swift/latest/s3\\_compat.html](https://docs.openstack.org/swift/latest/s3_compat.html))

### 7.1.13. ems

The URL of the [Execution Management Service](#) service.

**/ems** (example)

Implements an **EMS service** as described in section [Execution Management Service](#).

### 7.1.14. ades

The URL of the [Application Deployment and Execution Service](#) service.

**/ades** (example)

Implements an **ADES service** as described in section [Application Deployment and Execution Service](#).

### 7.1.15. workspace

The URL of the 'user workspace' service as described in section [Workspace](#).

**/workspace** (example)

The interface for the workspace is currently **TBD**.

## 7.2. Client Library

The Service API and its associated Client Library together present a standard platform interface against which analysis and exploitation activities may be developed, and through which platform services can be federated.

The Client Library is a programmatic representation of the Service API which acts as an abstraction

of the Exploitation Platform and so facilitates the development of portable client implementations.

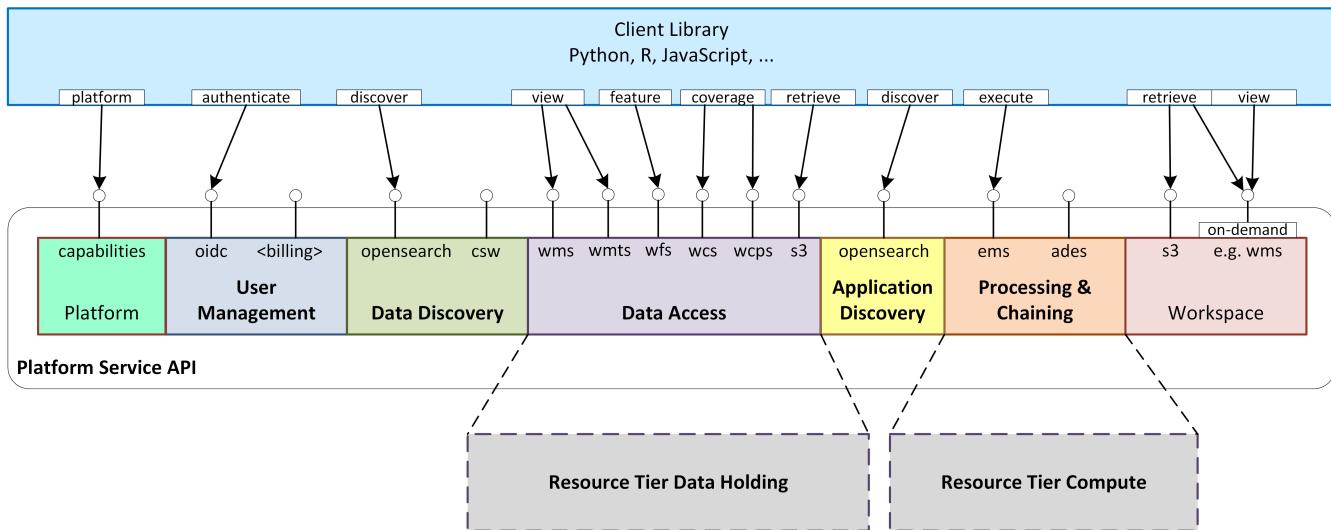


Figure 17. Client Library Service Interfaces

As illustrated in Figure 17, the Client Library provides bindings for common languages (Python, R, Javascript) that utilise the network (HTTP) interfaces of the Service API, covering all aspects of the Exploitation Platform functionality (authentication, data/processing discovery, processing etc.).

### 7.2.1. Client Library Concept Illustration

The design of the Client Library is not yet established. To illustrate its concept we present an example based upon the workflow scenario that was used to demonstrate the EMS/ADES best practice in OGC Testbed-14 ([TB14-ADES]). The scenario is shown in Figure 18.

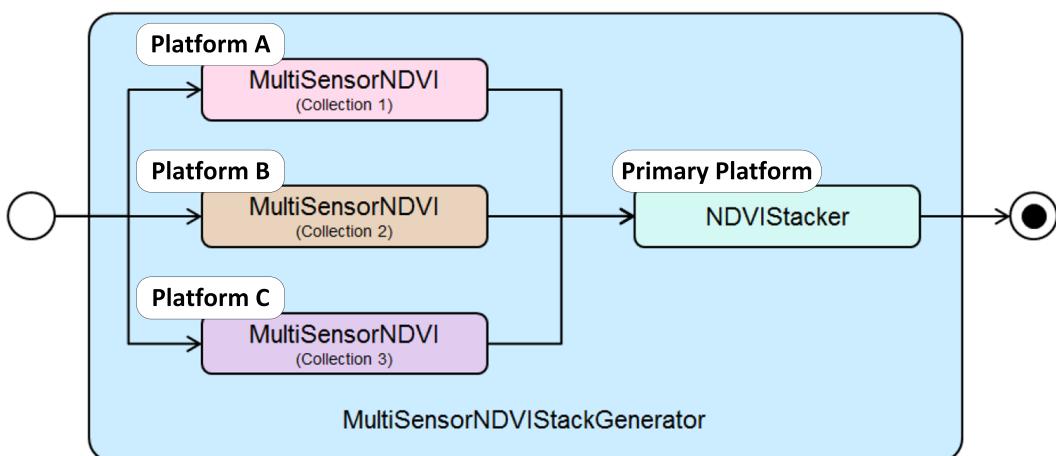


Figure 18. OGC Testbed-14 Workflow Scenario (NDVI Stacker)

Four platforms are involved in the scenario:

#### Platforms A/B/C

These platforms perform the local execution (ADES) of the MultiSensorNDVI processor on a collection in their local data holding. These executions are managed under the orchestration (EMS) of the Primary Platform.

## Primary Platform

The Primary Platform is in charge of the workflow. Thus, the orchestration (EMS) is conducted from this platform, which interfaces to the 'subordinate' platforms (A/B/C) for the execution of the steps 'close-to-the-data', and then completes the workflow by execution (ADES) of the NDVIStacker processor to produce the final result.

In response to this scenario we might envisage a client application implemented against the Client Library as follows...

*Example python program using Client Library*

```
import eoepca

# Connect to primary platform - e.g. when running on own desktop
primaryPlatform = eoepca.platform("http://primary.platform.eo") ①
primaryPlatform = primaryPlatform.authenticate("bob@home.org", "<<MY-API-KEY>>") ②
# Or, use the 'local' hosting platform - e.g. when running in 'cloud' platform
primaryPlatform = eoepca.platform().authenticate("bob@home.org", "<<MY-API-KEY>>") ②
③

# Init supporting platforms
platA = eoepca.platform("http://platform-a.eo") ① ④
platB = eoepca.platform("http://platform-b.eo") ① ④
platC = eoepca.platform("http://platform-c.eo") ① ④

# Specify extent
extent = { "bbox": [ -0.489, 51.28, 0.236, 51.686 ], "time": [ "2018-01-01", "2018-12-31" ] }

# Specify processes
coverage1 = platA.collection("PLAT_A_DATA").coverage(extent) ⑤
proc1 = coverage1.process("MultiSensorNDVI") ⑥
proc2 = platB.collection("PLAT_B_DATA").coverage(extent).process("MultiSensorNDVI") ⑤
⑥
proc3 = platC.collection("PLAT_C_DATA").coverage(extent).process("MultiSensorNDVI") ⑤
⑥

# Specify workflow
workflow = primaryPlatform.parallel([proc1, proc2, proc3]).process("NDVIStacker") ⑦

# Get result - initiates 'lazy' execution
result = workflow.retrieve(format="geotiff", options={}) ⑧
print(result)
```

① When each platform object is initialised, its endpoint  `${platform-url} / .well-known/ eoepca-platform` is interrogated, to understand its capabilities and learn its service endpoints.

② The user must authenticate to the primary platform (that 'executes' the workflow), using their API key.

③ In the case where the client is **running on the primary platform** then the platform URL is not

required in the initialisation (implying 'local' platform). Examples of this case include: code running in a hosted Jupyter notebook, or a deployed processing service that chooses to use the Client Library.

- ④ Subordinate platforms are initialised (for capabilities) without authentication, on the basis that the primary platform authentication can be carried through the workflow 'call-stack' through delegated/federated IAM solution - ref. section [\[IAM\]](#).
- ⑤ At each platform the collection is selected through its unique collection identifier, and a data coverage subset is specified through a definition of the required spatial/temporal extent.
- ⑥ At each platform the processing task to be executed against the selected coverage is specified.
- ⑦ The workflow is defined by requesting the parallel execution of the [MultiSensorNDVI](#) processor on each of the three platforms, with these results providing input to the [NDVISTacker](#) process executed on the primary platform.
- ⑧ The call to [retrieve](#) the outcome of the workflow initiates its '**lazy**' **execution**. Prior to this point the Client Library has been operating on '**proxy**' objects that record the **specification of the workflow** requested by the code. At this point the Client Library converts the workflow specification into a CWL definition suitable for deployment and execution at the [EMS](#) of the primary platform. In response the EMS will interface with the [ADES](#) of each subordinate platform to ensure the [MultiSensorNDVI](#) is deployed and executed against the requested coverage. Subsequently the EMS interfaces with the ADES of the local platform to ensure the [NDVISTacker](#) is deployed and executed against the outputs of the three [MultiSensorNDVI](#) process executions.

# Chapter 8. Web Portal

The Web Portal represents the browser-based user interface through which the user interacts with the EO Exploitation Platform.

The Web Portal is not a domain area in its own right – it is contributed to by the collaborative developments of the defined domain areas. The user's view of the platform is consolidated through the browser-based user interface, and hence it is convenient to present all aspects of this view together. Thus, the Web Portal provides the user facing 'front' of the system and interfaces to the services provided by the domain areas identified in the system ICD.

The Web Portal must provide a consistent and cohesive user experience that aggregates data and processing services of the EO Exploitation Platform. In doing so it must provide the following main functionalities:

- User login
- Marketplace, that provides a federated system search for discovery of data and processing capabilities
- User workspace to support scientific analysis and collaboration
- Data discovery and download of data
- In-browser visualisation of data and processing/analysis results
- Discovery, execution and monitoring of processing jobs
- Definition of workflows from discovered data/processing resources
- Hosting of user defined applications with interactive user interfaces
- Hosting of rich media content that is linked to catalogued resources. Such content ranges from documents & manuals to tutorials and instructional media.
- Hosting of community and collaboration tools such as Wikis, FAQs and forums

These user-facing web components form part of other domain areas that together present a rich integrated user experience. [Figure 19](#) presents these functional areas, organised within their respective domain areas.

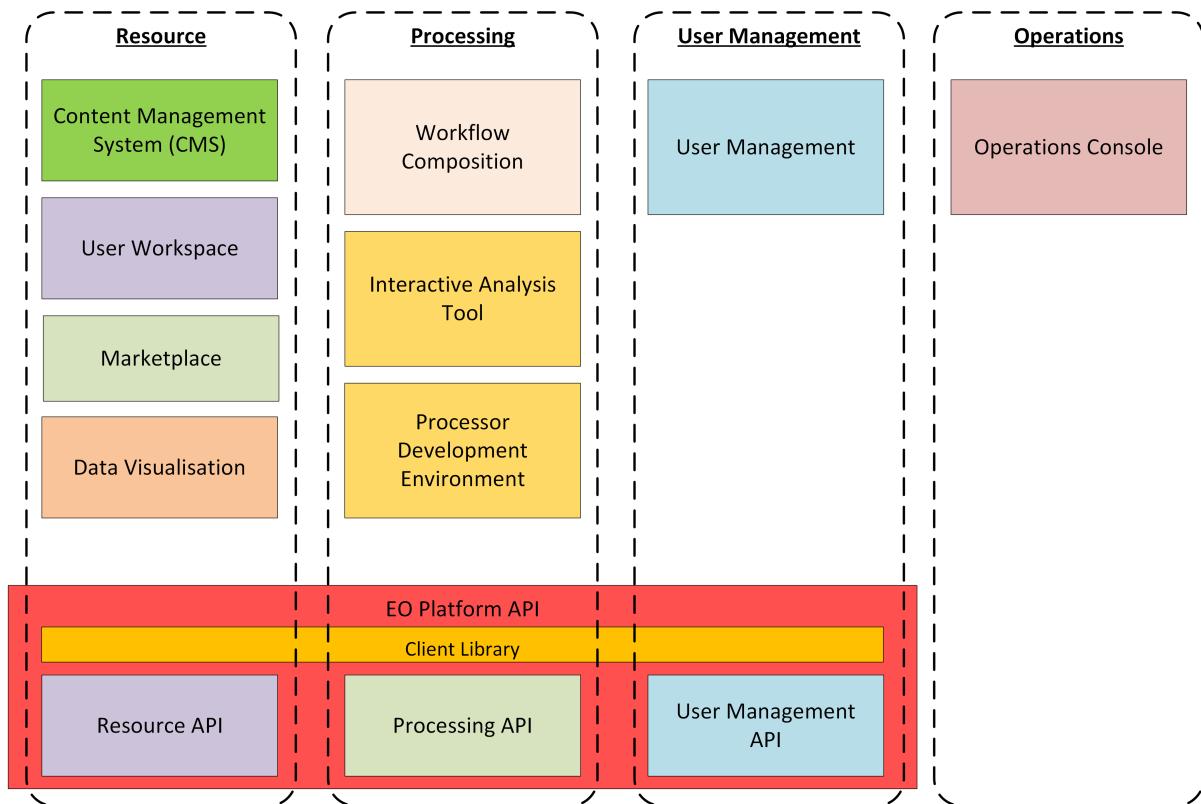


Figure 19. Web Portal: Overview

The platform should support provision of limited access to unauthenticated (guest) users, in which they can search the marketplace to discover the services and data available, and browse supporting materials. Access to the full capabilities of the platform requires registered users to identify and authenticate.

Optionally, a **Content Management System (CMS)** can provide a framework within which the platform's web presence is hosted. It facilitates the creation of user content that can be linked to data and processing resources in the Resource Catalogue. In addition, the CMS provides out-of-the-box facilities for Wikis, FAQs, forums etc.

The **Marketplace** builds a user experience on top of the Application & Data Catalogues that provides a consolidated inventory of all services, applications and data published within the federated system. The user is presented with the ability to browse and to perform rich search queries to discover items of specific interest. The Marketplace content for a data item can include interactive Data Visualisation, such as providing a WMS viewer that exploits the WMS service provided with the platform's resource service. This **Data Visualisation** component is re-usable such that it can be used elsewhere in the user experience, for example from the user's workspace to visualise some processing results.

The **User Workspace** provides the environment where users are able to organise data and processing they are interested in, and to manage asynchronous 'tasks' they have submitted into the platform. Thus, they are able to monitor data retrieval and processing requests and obtain the outputs at completion. The facility is also provided for them to publish derived 'added-value' outcomes from their workspace into the Resource Catalogue, and so present them in the marketplace.

Experts use the **Workflow Composition** interface to chain and combine multiple processing functions and input data into reusable workflows. The interface allows them to select these

resources discovered via the Marketplace, architect and execute their workflow, and ultimately publish it as a reusable processing function that is available to others in the Marketplace.

Experts are provided with an **Interactive Analysis Tool** that presents a hosted coding environment through which they can interact directly with the data and services of the platform. Additionally, Experts are able to develop and submit to the EO Exploitation Platform their own custom processing algorithms, tools and applications. The **Processor Development Environment** provides a rich, interactive environment in which processing algorithms and services can be developed, tested, debugged and ultimately packaged so that they can be deployed to the platform and published via the marketplace.

**User Management** provides the functionality associated with user profiles. New users will have the ability to self-register and then manage all aspects of their profile interactively - noting that the intention in the Common Architecture is to delegate User Identity management to external IdPs.

**Operators** will have access to management interfaces for system monitoring and administration.

---

<< End of Document >>