

# Contents

OGC® EO Data Access Best Practice .....	2
License Agreement .....	3
Abstract .....	5
Keywords .....	6
Submitting organizations .....	7
Document Contributor Contact Points.....	8
Changes to the OGC ® Abstract Specification .....	9
Future Work.....	10
Foreword .....	11
Introduction.....	12
EO-WCS .....	12
Further relevant OGC Services .....	13
Topics Covered .....	14
OGC® EO Data Access Best Practice .....	15
1. Scope .....	16
2. Normative references .....	17
3. Terms and definitions .....	19
3.1. Coverage .....	19
3.2. Dataset .....	19
3.3. Dataset Series .....	19
3.4. EO Coverage .....	19
3.5. EO Metadata .....	19
3.6. Stitched Mosaic .....	19
3.7. EO Product .....	19
3.8. EO Product Dataset .....	20
3.9. EO Product Quicklook .....	20
3.10. Lineage record .....	20
3.11. refers to .....	20
4. Conventions .....	21
4.1. UML notation .....	21
4.2. Data dictionary tables .....	21
4.3. Namespace prefix conventions .....	21
4.4. Multiple representations .....	22

5. Cross Service Interaction .....	23
5.1. Overview .....	23
6. rangeType Description Enhancements .....	24
6.1. Overview .....	24
6.2. Physical Properties .....	24
6.3. Data Types .....	25
6.4. Conversion from Data Types to Physical Properties .....	25
6.5. Hint for RGB Generation .....	26
6.6. Recommended definitions .....	27
6.6.1. <code>wcseo:dataSemantics</code> , <code>swe:Quantity/@definition</code> , and <code>swe:uom/@code</code> .....	27
6.6.2. <code>wcseo:dataType</code> .....	28
6.6.3. <code>wcseo:type</code> in <code>wcseo:dataType2dataSemantics</code> and <code>wcseo:RGBgenerationHint</code> .....	29
6.6.4. <code>wcseo:bandSequence</code> .....	29
6.6.5. <code>swe:DataRecord/@definition</code> .....	29
6.6.6. <code>swe:field/@name</code> vs. <code>swe:field/swe:Quantity/swe:identifier</code> .....	29
6.6.7. <code>swe:nilValue/@reason</code> .....	30
6.7. Examples .....	30
7. Coverage Collections .....	37
7.1. Grouping of Associated Data .....	37
7.1.1. Overview .....	37
7.2. Collection and Product Registration .....	43
7.2.1. Overview .....	43
7.3. Uniform Coverage Grouping .....	43
7.3.1. Overview .....	43
8. Condense Coverage Description Information .....	44
8.1. Overview .....	44
8.2. OpenSearch <code>view</code> parameter .....	44
8.2.1. Objective .....	45
8.2.2. <code>view</code> Parameter .....	45
9. WCS Masking Extension .....	47
9.1. Overview .....	47
10. Conclusions .....	48
Bibliography .....	49
Annex A: Revision History .....	50



# Open Geospatial Consortium

Submission Date: TBD

Publication Date: TBD

Approval Date: TBD

External identifier of this OGC® document:

<http://www.opengis.net/doc/BP/eo-data-access-bp>

Internal reference number of this OGC® Document: OGC 16-118

URL for this OGC® document: <https://eox-a.github.io/eo-data-access-bp/>

PDF version: <https://eox-a.github.io/eo-data-access-bp/index.pdf>

Version: 0.0.1draft

Category: OGC® Best Practice

Editor: Stephan Meißl

# OGC® EO Data Access Best Practice

Copyright © 2016 Open Geospatial Consortium.

To obtain additional rights of use, visit <http://www.opengeospatial.org/legal/>

## Warning

This document defines an OGC Best Practices on a particular technology or approach related to an OGC standard. This document is not an OGC Standard and may not be referred to as an OGC Standard. It is subject to change without notice. However, this document is an official position of the OGC membership on this particular technology topic.

Document type: OGC Best Practice  
Document subtype: Profile  
Document stage: Draft proposed version  
Document language: English

# License Agreement

Permission is hereby granted by the Open Geospatial Consortium, ("Licensor"), free of charge and subject to the terms set forth below, to any person obtaining a copy of this Intellectual Property and any associated documentation, to deal in the Intellectual Property without restriction (except as set forth below), including without limitation the rights to implement, use, copy, modify, merge, publish, distribute, and/or sublicense copies of the Intellectual Property, and to permit persons to whom the Intellectual Property is furnished to do so, provided that all copyright notices on the intellectual property are retained intact and that each person to whom the Intellectual Property is furnished agrees to the terms of this Agreement.

If you modify the Intellectual Property, all copies of the modified Intellectual Property must include, in addition to the above copyright notice, a notice that the Intellectual Property includes modifications that have not been approved or adopted by LICENSOR.

THIS LICENSE IS A COPYRIGHT LICENSE ONLY, AND DOES NOT CONVEY ANY RIGHTS UNDER ANY PATENTS THAT MAY BE IN FORCE ANYWHERE IN THE WORLD.

THE INTELLECTUAL PROPERTY IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, AND NONINFRINGEMENT OF THIRD PARTY RIGHTS. THE COPYRIGHT HOLDER OR HOLDERS INCLUDED IN THIS NOTICE DO NOT WARRANT THAT THE FUNCTIONS CONTAINED IN THE INTELLECTUAL PROPERTY WILL MEET YOUR REQUIREMENTS OR THAT THE OPERATION OF THE INTELLECTUAL PROPERTY WILL BE UNINTERRUPTED OR ERROR FREE. ANY USE OF THE INTELLECTUAL PROPERTY SHALL BE MADE ENTIRELY AT THE USER'S OWN RISK. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR ANY CONTRIBUTOR OF INTELLECTUAL PROPERTY RIGHTS TO THE INTELLECTUAL PROPERTY BE LIABLE FOR ANY CLAIM, OR ANY DIRECT, SPECIAL, INDIRECT OR CONSEQUENTIAL DAMAGES, OR ANY DAMAGES WHATSOEVER RESULTING FROM ANY ALLEGED INFRINGEMENT OR ANY LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR UNDER ANY OTHER LEGAL THEORY, ARISING OUT OF OR IN CONNECTION WITH THE IMPLEMENTATION, USE, COMMERCIALIZATION OR PERFORMANCE OF THIS INTELLECTUAL PROPERTY.

This license is effective until terminated. You may terminate it at any time by destroying the Intellectual Property together with all copies in any form. The license will also terminate if you fail to comply with any term or condition of this Agreement. Except as provided in the following sentence, no such termination of this license shall require the termination of any third party end-user sublicense to the Intellectual Property which is in force as of the date of notice of such termination. In addition, should the Intellectual Property, or the operation of the Intellectual Property, infringe, or in LICENSOR's sole opinion be likely to infringe, any patent, copyright, trademark or other right of a third party, you agree that LICENSOR, in its sole discretion, may terminate this license without any compensation or liability to you, your licensees or

any other party. You agree upon termination of any kind to destroy or cause to be destroyed the Intellectual Property together with all copies in any form, whether held by you or by any third party.

Except as contained in this notice, the name of LICENSOR or of any other holder of a copyright in all or part of the Intellectual Property shall not be used in advertising or otherwise to promote the sale, use or other dealings in this Intellectual Property without prior written authorization of LICENSOR or such copyright holder. LICENSOR is and shall at all times be the sole entity that may authorize you or any third party to use certification marks, trademarks or other special designations to indicate compliance with any LICENSOR standards or specifications.

This Agreement is governed by the laws of the Commonwealth of Massachusetts. The application to this Agreement of the United Nations Convention on Contracts for the International Sale of Goods is hereby expressly excluded. In the event any provision of this Agreement shall be deemed unenforceable, void or invalid, such provision shall be modified so as to make it valid and enforceable, and as so modified the entire Agreement shall remain in full force and effect. No decision, action or inaction by LICENSOR shall be construed to be a waiver of any rights or remedies available to it. None of the Intellectual Property or underlying information or technology may be downloaded or otherwise exported or reexported in violation of U.S. export laws and regulations. In addition, you are responsible for complying with any local laws in your jurisdiction which may impact your right to import, export or use the Intellectual Property, and you represent that you have complied with any regulations or registration procedures required by applicable law to make this license enforceable

# Abstract

This OGC Best Practice document provides conventions and recommendations on how to utilize OGC services to provide access to Earth Observation data.



# Keywords

ogcdoc, eo, earth observation, data access, wcs, eo-wcs

# Submitting organizations

The following organizations have submitted this Best Practice to the Open GeoSpatial Consortium, Inc.:

- [EOX IT Services GmbH](#)
- [German Aerospace Center \(DLR\)](#)
- [GeoSolutions S.A.S.](#)
- [European Space Agency \(ESA\)](#)
- [Jacobs University Bremen](#)

# Document Contributor Contact Points

All questions regarding this document should be directed to the editor or the contributors.

Name	Organization
Stephan Meißl < <a href="mailto:stephan.meissl@eox.at">stephan.meissl@eox.at</a> >	<a href="#">EOX IT Services GmbH</a>
Peter Baumann < <a href="mailto:p.baumann@jacobs-university.de">p.baumann@jacobs-university.de</a> >	<a href="#">Jacobs University Bremen</a>

# Changes to the OGC ® Abstract Specification

The OGC ® Abstract Specification does not require any changes to accommodate the technical contents of this (part of this) document.

# Future Work

Please send any suggestions for future work to the document editor or contributors named above.

# Foreword

This OGC Best Practice document details proposed configuration and instantiation conventions and recommendations on how to utilize OGC services for access to Earth Observation (EO) data. These proposed conventions and recommendations have been developed in the [European Space Agency \(ESA\)](#) funded project [Evolution of EO Online Data Access Services \(EVO-ODAS\)](#).

It is defined how to utilize OGC's [Web Coverage Service \(WCS\)](#) with EO products including generic conventions and recommendations for data and metadata mapping and conversions which are to be used in concrete tailorings for specific missions. It further considers how to link to other services like CSW, WMS, and WPS.

Suggested additions, changes, and comments on this draft document are welcome and encouraged. Such suggestions may be submitted by email message, by creating an issue or a pull request at the [GitHub repository](#), or by making suggested changes in an edited copy of this document.

*Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. The Open Geospatial Consortium shall not be held responsible for identifying any or all such patent rights.*

*Recipients of this document are requested to submit, with their comments, notification of any relevant patent claims or other intellectual property rights of which they may be aware that might be infringed by any implementation of the standard set forth in this document, and to provide supporting documentation.*

# Introduction

The [Earth Observation Data Access Best Practice document](#) at hand provides a detailed look at the access to EO data from an OGC perspective.

EO data is typically available as raster data or, in OGC terminology, as coverages. Thus the main OGC service relevant for the data access task is the [Web Coverage Service \(WCS\)](#) and its [Earth Observation Application Profile \(EO-WCS\)](#). Nonetheless further OGC services like the [Web Map Service \(WMS\)](#) and the [Web Map Tile Service \(WMTS\)](#) for visualization, the [Catalog Service \(CSW, OpenSearch\)](#) for discovery, or the [Web Processing Service \(WPS\)](#) for processing need to be taken into account in order to provide a well integrated solution for data consumers.

## EO-WCS

The [WCS 2.0 Earth Observation Application Profile \(EO-WCS\)](#) [OGC 10-140r2] has been adopted by OGC defining a profile of WCS 2.0 for use on Earth Observation data. Naturally the present document focuses on EO-WCS but makes sure not to forget the surroundings to put it into context.

EO-WCS adds some concepts relevant for the EO domain on one side and some constraints on the other to the generic WCS:

- Specific Earth Observation coverages ([EO Coverage](#) or [Dataset](#)) which have at least a footprint on Earth as well as a temporal validity extent. Each [EO Coverage](#) has to have an [EO Metadata](#) set [OGC 10-157r4] contained in its metadata which describes the coverage on hand on a higher semantic level.
- Heterogeneous groupings or collections of Datasets into [Dataset Series](#). This hierarchy allows for an efficient retrieval of metadata as well as data via the newly added [DescribeEOCoverageSet](#) and [GetEOCoverageSet](#) operations respectively.



Although named [Dataset Series](#) this concept can and should be used to group together any [Datasets](#). An example is to group together the Datasets stemming from a multi-resolution satellite image to form an [EO Product](#).



[Dataset Series](#) may also include other Dataset Series as well as [Stitched Mosaics](#)



[Dataset Series](#) themselves are not coverages.


- Homogeneous groupings or collections of spatially non-overlapping subsets of Datasets into [Stitched Mosaics](#).



[Stitched Mosaics](#) are accessible themselves as coverages.

- DescribeEOCoverageSet operation allowing to retrieve metadata from collections applying spatial and/or temporal constraints.
- GetEOCoverageSet operation allowing to retrieve data from collections applying spatial and/or temporal constraints.
- Constraint mandatory WCS extensions.

One of the motivations to introduce the concept of [Dataset Series](#) is to limit the size of capabilities responses. They only need to report the identifiers of [Dataset Series](#) instead of summaries for all coverages available. Metadata for individual coverages is obtained using the new DescribeEOCoverageSet operation. This operation supports basic spatial and temporal searching as well as paging and thus stepping through the available data. [Figure 1](#) shows the sequence to use EO-WCS.

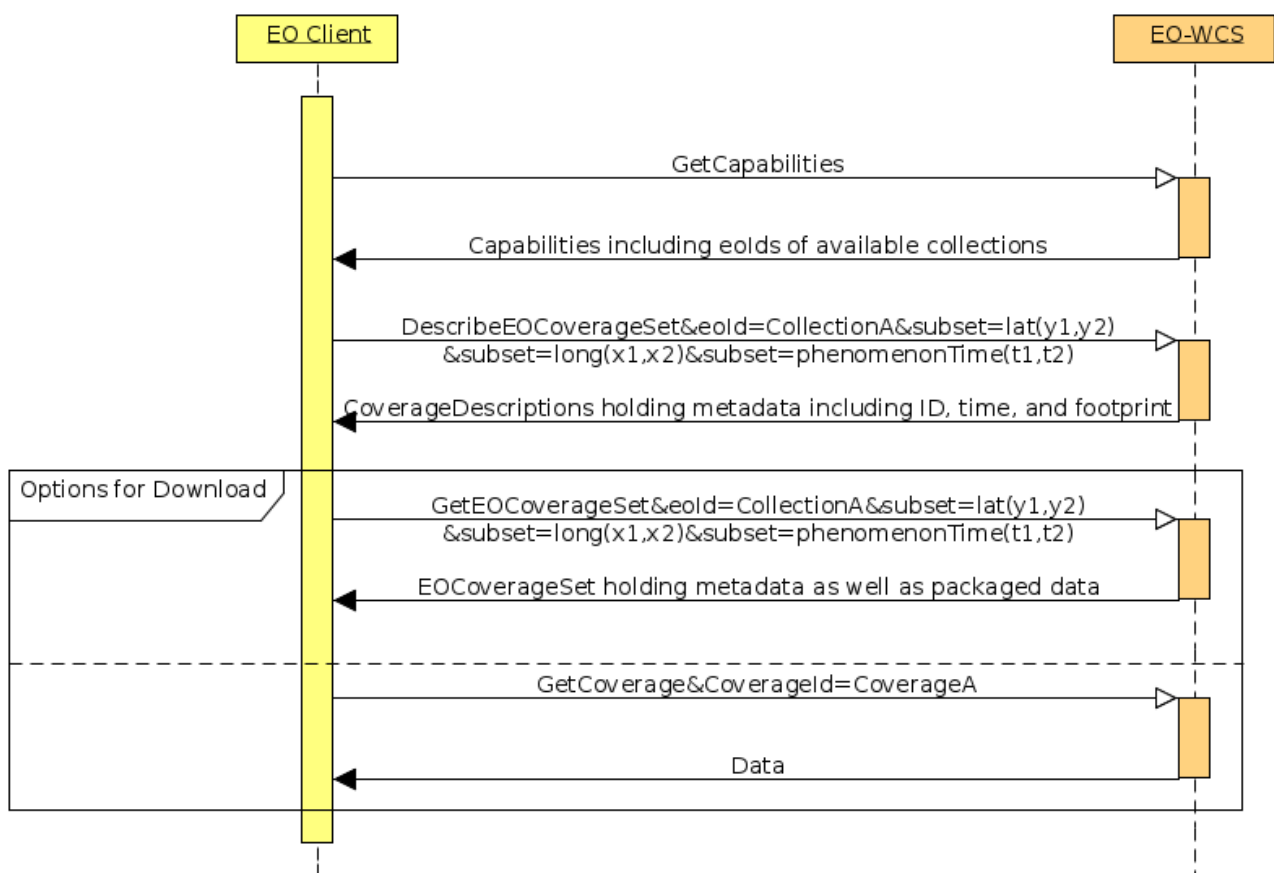


**Figure 1. Sequence diagram showing the exploitation of EO-WCS**

## Further relevant OGC Services

Before downloading data it is typically desired or at least useful to view the data and metadata. The OGC service standardized for data viewing is the [Web Map Service \(WMS\)](#). For the EO domain the [Web Map Services - Profile for EO Products \(EO-WMS\) \[07-063r1\]](#) has been designed. This WMS profile allows to browse through collections using the time parameter on one layer. Provided that the same data is available from the EO-WCS Dataset Series and the EO-WMS collection layer a combined exploitation of



EO-WCS and EO-WMS as shown in [Figure 2](#) is feasible.

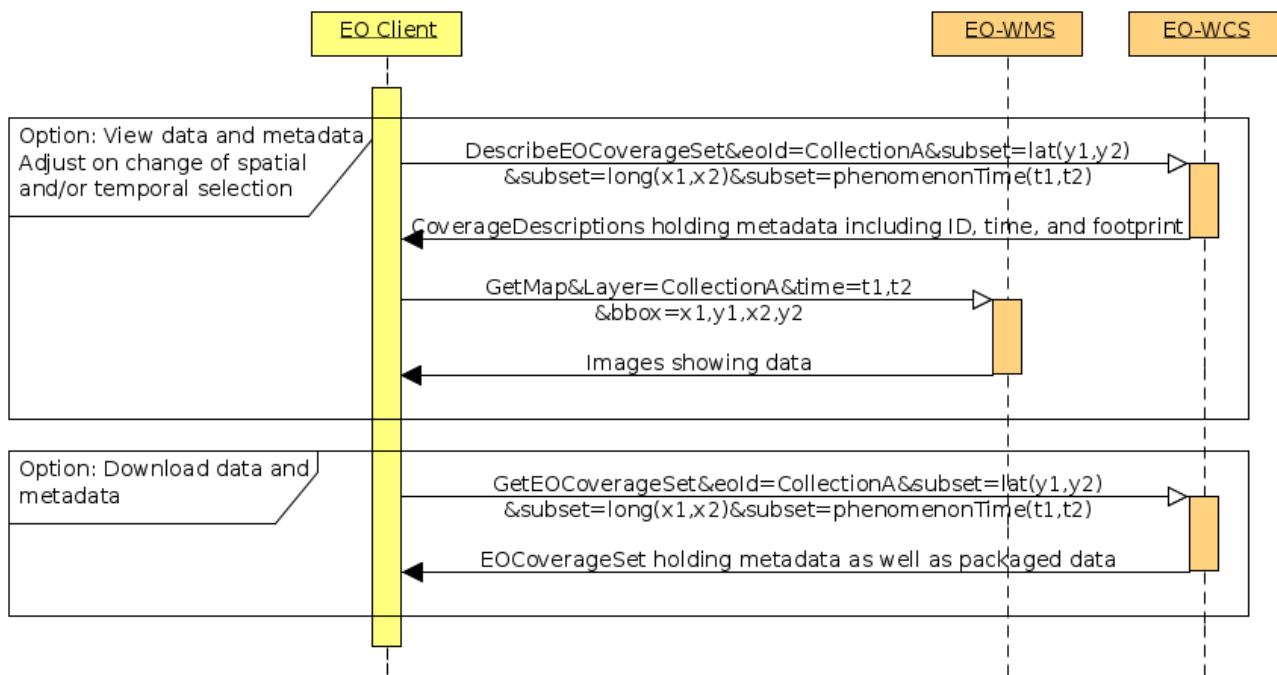

**Figure 2. Sequence diagram showing the combined exploitation of EO-WCS and EO-WMS**

Of course the WMS in this scenario can easily be replaced by the [Web Map Tile Service \(WMTS\)](#) specifically designed to improve the performance of WMS.

Further OGC standardized services to take into account are the [Catalog Service \(CSW, OpenSearch\)](#) for discovery, the [Download Service for Earth Observation Products Best Practice \(DS-EO\)](#) [13-043] as well as the [Web Processing Service \(WPS\)](#).

## Topics Covered

Centered around EO-WCS this Best Practice document defines conventions and makes recommendations for the following topics:

- [Cross Service Interaction](#) - Detailing how to structure the data offered in the various services as well as how to explicitly link between those services. The OGC services under consideration are: OpenSearch, WMS, WMTS, WCS, and DS-EO.
- [rangeType Description Enhancements](#) - Designing usage and utilization of how to describe the range values of products.
- [Collection and Product Registration](#) - Drafting an HTTP REST API for programmatic collection and product registration.
- [Grouping of Coverages and Associated Data](#) - Adding support for typical EO concepts like multi-resolution products or cloud masks to OGC services.
- [Condense Coverage Description Information](#) - Applying performance optimizations to facilitate and enable modern web based applications.

- [WCS Masking Extension](#) - Proposing support for retrieving non-rectangular subsets of coverages from WCS.

# OGC® EO Data Access Best Practice

# Chapter 1. Scope

This OGC Best Practice document details configuration and instantiation conventions for access to Earth Observation (EO) data. It defines how to utilize EO-WCS with EO products including generic conventions and recommendations for data and metadata mapping and conversion which are to be used in concrete tailoring for specific missions. It further considers how to link to other services like CSW, WMS, and WPS.

# Chapter 2. Normative references

The following normative documents contain provisions that, through reference in this text, constitute provisions of this specification. For dated references, subsequent amendments to, or revisions of, any of these publications do not apply. For undated references, the latest edition of the normative document referred to applies.

OGC 06-121r9, *OGC Web Services Common Standard*, version 2.0

OGC 09-146r2, *OGC® Coverage Implementation Schema* (renamed from *OGC® GML Application Schema - Coverages*), version 1.0

OGC 09-110r4, *OGC® WCS 2.0 Interface Standard- Core: Corrigendum*, version 2.0

OGC 10-140r2, *OGC® Web Coverage Service 2.0 Interface Standard - Earth Observation Application Profile*, version 1.1

OGC 11-053r1, *OGC® Web Coverage Service Interface Standard - CRS Extension*, version 1.0  
OGC 12-039, *OGC® Web Coverage Service Interface Standard - Scaling Extension*, version 1.0

OGC 12-040, *OGC® Web Coverage Service Interface Standard - Range Subsetting Extension*, version 1.0

OGC 12-049, *OGC® Web Coverage Service Interface Standard - Interpolation Extension*, version 1.0

OGC 09-147r3, *OGC® Web Coverage Service 2.0 Interface Standard - KVP Protocol Binding Extension - Corrigendum*, version 1.0

OGC 09-149r1, *OGC® Web Coverage Service 2.0 Interface Standard - XML/SOAP Protocol Binding Extension*, version 1.0

OGC 12-100r1, *OGC® GML Application Schema - Coverages - GeoTIFF Coverage Encoding Profile*, version 1.0

OGC 14-100r2, *OGC® CF-netCDF 3.0 encoding using GML Coverage Application Schema*, version 2.0

OGC 12-108, *OGC® GML Application Schema - Coverages JPEG2000 Coverage Encoding Extension*, version 1.0

OGC 10-157r4, *OGC® Earth Observation Metadata profile of Observations & Measurements*, version 1.1

OGC 07-063r1, *OpenGIS® Web Map Services - Profile for EO Products*, version 0.3.3

*OpenSearch Parameter extension*, version 1.0 Draft 2, accessed 2016-43-20,  
<http://www.opensearch.org/Specifications/OpenSearch/Extensions/Parameter/1.0/Draft>

OGC 13-026r8, *OGC® OpenSearch Extension for Earth Observation*, version 1.0

OGC 13-043, *OGC Download Service for Earth Observation Products Best Practice*, version 1.0

# Chapter 3. Terms and definitions

This document uses the standard terms defined in Subclause 5.3 of [OGC 06-121r9], which is based on the ISO/IEC Directives, Part 2, Rules for the structure and drafting of International Standards. In particular, the word "shall" (not "must") is the verb form used to indicate a requirement to be strictly followed to conform to this standard.

For the purposes of this document, the terms and definitions given in the above references, particularly EO-WCS [10-140r2], apply. In addition, the following terms and definitions apply. An arrow "→" indicates that the following term is defined in this Clause.

## 3.1. Coverage

digital representation of a spatio-temporally varying phenomenon as defined in

## 3.2. Dataset

→ [EO Coverage](#)



A Dataset usually represents observations obtained by satellite instruments.

## 3.3. Dataset Series

collection of → [EO Coverages](#)

## 3.4. EO Coverage

Rectified Grid → [Coverage](#) or Referenceable Grid → [Coverage](#) having an → [EO Metadata](#) record and a WGS84 footprint

## 3.5. EO Metadata

→ [EO Coverage's](#) metadata record

## 3.6. Stitched Mosaic

→ [EO Coverage](#) composed from subsets of one or more co-referenced → [Datasets](#)

## 3.7. EO Product

An EO Product contains one or more related → [EO Product](#) Datasets plus metadata and

optionally auxiliary data like → [EO Product](#) Quicklooks.

## 3.8. EO Product Dataset

One or more files each containing one or more → [EO Coverages](#).

## 3.9. EO Product Quicklook

A visual representation of a usually reduced → [EO Product](#) Dataset encoded in an image format. The → [EO Product](#) Dataset may combine different bands.

## 3.10. Lineage record

Data structure documenting an operation that has been applied to the → [Coverage](#) it is part of

## 3.11. refers to

contains, in its → [EO Metadata](#) element as defined in [OGC 10-157r4], the → [EO Metadata](#) element of

# Chapter 4. Conventions

## 4.1. UML notation

Unified Modeling Language (UML) static structure diagrams appearing in this specification are used as described in Subclause 5.2 of OGC Web Services Common [OGC 06-121r9].

## 4.2. Data dictionary tables

The UML model data dictionary is specified herein in a series of tables. The contents of the columns in these tables are described in Subclause 5.5 of [OGC 06-121r9]. The contents of these data dictionary tables are normative, including any table footnotes.

## 4.3. Namespace prefix conventions

The following namespaces are used in this document. The prefix abbreviations used constitute conventions used here, but are **not** normative. The namespaces to which the prefixes refer are normative, however.

**Table 1. Namespace mappings**

Prefix	Namespace URI	Description
xsd	<a href="http://www.w3.org/2001/XMLSchema">http://www.w3.org/2001/XMLSchema</a>	XML Schema namespace
ows	<a href="http://www.opengis.net/ows/2.0">http://www.opengis.net/ows/2.0</a>	OWS Common 2.0
gml	<a href="http://www.opengis.net/gml/3.2">http://www.opengis.net/gml/3.2</a>	GML 3.2.1
gmlcov	<a href="http://www.opengis.net/gmlcov/1.0">http://www.opengis.net/gmlcov/1.0</a>	Coverages Implementation Schema 1.0
wcs	<a href="http://www.opengis.net/wcs/2.0">http://www.opengis.net/wcs/2.0</a>	WCS 2.0
eop	<a href="http://www.opengis.net/eop/2.1">http://www.opengis.net/eop/2.1</a>	Earth Observation Metadata Profile of Observations and Measurements
opt	<a href="http://www.opengis.net/opt/2.1">http://www.opengis.net/opt/2.1</a>	Optical Earth Observation Metadata Profile of Observations and Measurements (extension of eop)
sar	<a href="http://www.opengis.net/sar/2.1">http://www.opengis.net/sar/2.1</a>	SAR Earth Observation Metadata Profile of Observations and Measurements (extension of eop)
wcseo	<a href="http://www.opengis.net/wcs/wcseo/1.1">http://www.opengis.net/wcs/wcseo/1.1</a>	WCS Application Profile - Earth Observation 1.1



Prefix	Namespace URI	Description
scal	<a href="http://www.opengis.net/wcs/scaling/1.0">http://www.opengis.net/wcs/scaling/1.0</a> (schema uses <a href="http://www.opengis.net/WCS_service-extension_scaling/1.0">http://www.opengis.net/WCS_service-extension_scaling/1.0</a> )	WCS Scaling Extension
int	<a href="http://www.opengis.net/wcs/interpolation/1.0">http://www.opengis.net/wcs/interpolation/1.0</a> (schema uses <a href="http://www.opengis.net/WCS_service-extension_interpolation/1.0">http://www.opengis.net/WCS_service-extension_interpolation/1.0</a> )	WCS Interpolation Extension
crs	<a href="http://www.opengis.net/wcs/crs/1.0">http://www.opengis.net/wcs/crs/1.0</a>	WCS CRS Extension
gmd	<a href="http://www.isotc211.org/2005/gmd">http://www.isotc211.org/2005/gmd</a>	ISO 19139 Metadata
gmi	<a href="http://standards.iso.org/iso/19115-2/gmi/1.0">http://standards.iso.org/iso/19115-2/gmi/1.0</a> or <a href="http://www.isotc211.org/2005/gmi">http://www.isotc211.org/2005/gmi</a>	ISO 19139-2 Metadata
mdb	<a href="http://standards.iso.org/iso/19115-3/mdb/1.0">http://standards.iso.org/iso/19115-3/mdb/1.0</a>	ISO 19115-3 Metadata

## 4.4. Multiple representations

When multiple representations of the same information are given in a specification document these are consistent. Should this not be the case then this is considered an error, and the [XML Schema](#) shall take precedence.

# Chapter 5. Cross Service Interaction

## 5.1. Overview

In a number of scenarios and use cases it is necessary to be able to link from one service to another, holding e.g. different views on the same data. For example a user might first be presented with an RGB view on some data via WMS before downloading the actual data, that is, full bands via WCS. The question is, how is a client supposed to construct WCS requests for the same product just seen via WMS? Currently there is no standard way defined how to provide such links.

We propose to address the cross service interaction item by giving recommendations on how to structure the data offered in the various services as well as how to explicitly link between them. These explicit link recommendations include these services: OpenSearch, WMS, WMTS, WCS, and DS-EO.

An example for a data structuring recommendation is that for a collection there should be an EO-WMS layer and an EO-WCS DatasetSeries provided both reusing the ID of the collection. Thus clients know that a product viewed via a GetMap request with TIME parameter can be downloaded via a GetEOCoverageSet request using the same TIME parameter value.

First explicit linking recommendations are given in the "EVO-ODAS Recommendation on building a discovery interface using OpenSearch Technical Note" [RD49] by GeoSolutions. The recommendation there is to use `link` elements with a `rel` attribute of value `wms`, `wmts`, `wcs`, `wfs`, or `ds-eo` in Atom results to link to the EO Product in the respective service. Note that it also includes recommendations on how to structure these links in order to link to a single product. In short the recommendation is to link to a tailored Capabilities document like e.g., <http://u.rl?service=WMS&acceptVersions=1.3.0&request=GetCapabilities&time=2015-10-02T10:00:00Z&elevation=150>. This covers all links from OpenSearch to any other service.

In the same way recommendations will be given from (EO-)WMS, WMTS, (EO-)WCS, and DS-EO to the respective four other services using for example `wms:DataURL`, in the layer specification of the WMS Capabilities linking to the corresponding EO-WCS DatasetSeries.

TODO

# Chapter 6. rangeType Description Enhancements

## 6.1. Overview

The rangeType component of a coverage describes the common data type all this coverage's range values (such as pixels) share. In programming languages, this typically consists of differentiating between signed integer, unsigned integer, float, etc.

The rangeType concept, however, goes far beyond such classical data typing; adopting OGC O&M definitions, a comprehensive semantics description can be expressed indicating the range value type (which can be a classical data type such as "non-negative integer", but can also denote application semantics such as "radiation", "SAR") given by a URL, a definition of the unit of measure of the values, null values, and several more can be expressed.

In the basic, domain-agnostic OGC Coverage Implementation Schema (CIS, formerly known as GML Application Schema, GMLCOV) only these general items are defined. EO-WCS 1.1 extends this range type description, as it is used in WCS 2, with EO-specific detail information.

The extension includes elements to specify the measured physical properties (`wcseo:dataSemantics`), the data types of stored numbers (`wcseo:dataType`), the conversion from stored numbers to physical properties (`wcseo:dataType2dataSemantics`), as well as a hint for how to generate a RGB version (`wcseo:RGBgenerationHint`).

The additional range type information is provided via the `wcseo:rangeTypeExtension` element which is either included once for the whole range type under the `swe:DataRecord` element or separately for each channel, often referred to as band, under each `swe:DataRecord/swe:field/swe:Quantity` element. It may also be included in both locations for example when there is one common RGB generation hint but the data conversion is specific for each band.

The new elements are introduced one by one in the following sections and extensive examples are given [below](#).

## 6.2. Physical Properties

The `wcseo:rangeTypeExtension` element first includes the `wcseo:dataSemantics` element of type `anyURI`. This element holds an URI preferably resolving to a description of the observed physical property like <http://sweet.jpl.nasa.gov/2.3/stateSpectralBand.owl#Visible>.

This element needs to be synchronized with the `definition` attribute of each `swe:Quantity` element as well as the unit of measure defined via the `code` attribute of

the `swe:uom` element again of each `swe:Quantity` element.

XML instance examples included with the OGC schemas make use of <http://www.opengis.net/def/property/OGC/0/Radiance> for the `definition` attribute which doesn't resolve to something useful as expected. Another URI used in OGC examples is <http://sweet.jpl.nasa.gov/2.0/physRadiation.owl#Radiance>. The latest version of this at the time of writing is <http://sweet.jpl.nasa.gov/2.3/propEnergyFlux.owl#Radiance>.

It is suspected that the ESA funded projects RARE, SMAAD, OBEOS, and/or PRODTREES define URIs to describe physical properties as well. However, a web research didn't bring up anything useful in this direction. Thus, for the time being, the examples given use the SWEET ontologies defined by the NASA Jet Propulsion Laboratory (<http://sweet.jpl.nasa.gov>).

An example for a unit of measure code is `W.m-2.sr-1` as defined by <http://sweet.jpl.nasa.gov/2.3/reprSciUnits.owl#wattPerMeterSquaredPerSteradian> for radiance as used above.

SWE Common mandates the usage of units as defined by <http://aurora.regenstrief.org/UCUM>. However, this server is not accessible anymore and seems to be moved to <http://unitsofmeasure.org/ucum.html>.

Another physical property example is spectral radiance with URI <http://sweet.jpl.nasa.gov/2.3/propEnergyFlux.owl#SpectralRadiance> and unit of measure code `W.m-2.sr-1.nm-1` as defined by <http://sweet.jpl.nasa.gov/2.3/reprSciUnits.owl#wattPerMeterSquaredPerSteradianPerWavelength>.

## 6.3. Data Types

The `wcseo:rangeTypeExtension` element further includes the `wcseo:dataType` element, again of type `anyURI`. This element again holds an URI preferably resolving to a description of the data type. Examples of such URIs are <http://www.opengis.net/def/dataType/OGC/1.1/nonNegativeInteger>, <http://www.opengis.net/def/dataType/OGC/0/unsignedInt>, or <http://www.opengis.net/def/property/netcdf/1.0/unsignedShort>.

The data type is also implicitly provided via the actual coverage encoding. However, to describe it explicitly in the `wcseo:rangeTypeExtension` element allows clients to retrieve it also in coverage descriptions and without need to understand and parse the actual coverage encoding format.

## 6.4. Conversion from Data Types to Physical Properties

In order to be able to convert the stored numbers to the value of the actual measured

physical property the `wcseo:dataType2dataSemantics` element is added to the `wcseo:rangeTypeExtension`. It describes the conversion via two real number intervals and a type.

`wcseo:intervalFrom` gives the interval of values stored in the coverage, `wcseo:intervalTo` specifies the interval the stored values are converted to, and `wcseo:type` defines which conversion method to use. Both intervals are given via two real numbers and the type via anyURI.

The example below describes a linear transformation, as typically used for optical data, from [1,4095] to [390.0000,780.0000] i.e. for a value  $x$  between 1 and 4095 the actual measured value  $y$  is calculated as:  $y = 390 + (x-1) * (780-390) / (4095-1)$

```
<wcseo:dataType2dataSemantics>
  <wcseo:intervalFrom>1 4095</wcseo:intervalFrom>
  <wcseo:intervalTo>390.0000 780.0000</wcseo:intervalTo>
  <wcseo:type>
    http://sweet.jpl.nasa.gov/2.3/reprMathFunction.owl#Linear</wcseo:type>
  </wcseo:dataType2dataSemantics>
```

Another example, given below, describes the inverse to a logarithmic transformation as for example sometimes used for radar data. The transformation of stored values  $x$  in the interval [1,65535] to observed values  $y$  in the interval [2,1000000000] is given by  $y = 2 * e^{(((x-1)*(ln(1000000000)-ln(2)))/(65535-1))}$ .

```
<wcseo:dataType2dataSemantics>
  <wcseo:intervalFrom>1 65535</wcseo:intervalFrom>
  <wcseo:intervalTo>2 1000000000</wcseo:intervalTo>

  <wcseo:type>http://sweet.jpl.nasa.gov/2.3/reprMathFunction.owl#ExponentialFunction</wcseo:type>
</wcseo:dataType2dataSemantics>
```

## 6.5. Hint for RGB Generation

The last element in the `wcseo:rangeTypeExtension` element is the `wcseo:RGBgenerationHint` element. It is meant to provide a hint for clients wanting to visualize the data. It includes the elements `wcseo:bandSequence`, `wcseo:intervalFrom`, `wcseo:intervalTo`, and `wcseo:type`. The first is a list of three band names or band arithmetic instructions delimited by spaces used for the three bands to generate the RGB version. The names used shall be equal to `name` attributes of the respective `swe:field` element. The other three elements are comparable to the ones used in the data conversion above.

The example below describes the RGB generation from a single band product by reusing the single band three times and logarithmically stretching the interval [100,100000000] to [1,255] i.e. value  $x$  is converted to  $y$  using  $y = ((\ln(x)-\ln(100))*(255-1))/(\ln(100000000)-\ln(100))+1$ .

```
<wcseo:RGBgenerationHint>
  <wcseo:bandSequence>gray gray gray</wcseo:bandSequence>
  <wcseo:intervalFrom>100 100000000</wcseo:intervalFrom>
  <wcseo:intervalTo>1 255</wcseo:intervalTo>
  <wcseo:type>
    http://sweet.jpl.nasa.gov/2.3/reprMathFunction.owl#Logarithmic</wcseo:type>
  </wcseo:RGBgenerationHint>
```

## 6.6. Recommended definitions

This section details our recommendations for the most commonly used data as well as for data not covered here. Of course data providers are free to choose any definitions, it's just highly recommended to use resolvable URIs providing meaningful descriptions ideally machine as well as human readable.

### 6.6.1. `wcseo:dataSemantics`, `swe:Quantity/@definition`, and `swe:uom/@code`

The non-exhaustive list below provides recommendations for the values of the three items `wcseo:dataSemantics`, `definition` attribute of `swe:Quantity`, and `code` attribute of `swe:Quantity/swe:uom` for the most common use cases.

- Panchromatic
  - `wcseo:dataSemantics`
    - <http://sweet.jpl.nasa.gov/2.3/stateSpectralBand.owl#Visible>
  - `definition`
    - <http://sweet.jpl.nasa.gov/2.3/propEnergyFlux.owl#SpectralRadiance>
  - `code`
    - `W.m-2.sr-1.nm-1`
- RGB
  - `wcseo:dataSemantics`
    - <http://sweet.jpl.nasa.gov/2.3/stateSpectralBand.owl#Red>
    - <http://sweet.jpl.nasa.gov/2.3/stateSpectralBand.owl#Green>
    - <http://sweet.jpl.nasa.gov/2.3/stateSpectralBand.owl#Blue>
  - `definition`
    - <http://sweet.jpl.nasa.gov/2.3/propEnergyFlux.owl#SpectralRadiance>

- `code`
  - `W.m-2.sr-1.nm-1`
- SAR
  - `wcseo:dataSemantics`
    - <http://sweet.jpl.nasa.gov/2.3/stateSpectralBand.owl#CBand>
  - `definition`
    - <http://sweet.jpl.nasa.gov/2.3/propSpaceMultidimensional.owl#RadarCrossSection>
  - `code`
    - `dB`
- Further URIs
  - `wcseo:dataSemantics`
    - Most concepts in <http://sweet.jpl.nasa.gov/2.3/stateSpectralBand.owl>
  - `definition`
    - <http://sweet.jpl.nasa.gov/2.3/propEnergyFlux.owl#Radiance>
    - <http://sweet.jpl.nasa.gov/2.3/propEnergyFlux.owl#Intensity>
  - `code`
    - `W.m-2.sr-1`
    - `W.m-2`

### 6.6.2. `wcseo:dataType`

The `wcseo:dataType` needs to match the data type actually used in the coverage encoding like GeoTIFF. The non-exhaustive list below provides recommendations for URIs to use. Further definitions can be retrieved using the base URIs from the examples given below.

- <http://www.opengis.net/def/dataType/OGC/0/unsignedByte>
- <http://www.opengis.net/def/dataType/OGC/0/unsignedShort>
- <http://www.opengis.net/def/dataType/OGC/0/unsignedInt>
- <http://www.opengis.net/def/dataType/OGC/0/unsignedLong>
- <http://www.w3.org/2001/XMLSchema#unsignedByte>
- <http://www.w3.org/2001/XMLSchema#unsignedShort>
- <http://www.w3.org/2001/XMLSchema#integer>
- <http://www.w3.org/2001/XMLSchema#nonNegativeInteger>
- <http://www.w3.org/2001/XMLSchema#double>

Other possible but not recommended values are provided in the list below.

- <http://www.opengis.net/def/dataType/OGC/1.1/nonNegativeInteger>
- <http://www.opengis.net/def/property/netcdf/1.0/unsignedShort>

### 6.6.3. `wcseo:type` in `wcseo:dataType2dataSemantics` and `wcseo:RGBgenerationHint`

Recommendations for possible values for the `wcseo:type` element used to define data conversions are provided below.

- <http://sweet.jpl.nasa.gov/2.3/reprMathFunction.owl#Linear>
- <http://sweet.jpl.nasa.gov/2.3/reprMathFunction.owl#Logarithmic>
- <http://sweet.jpl.nasa.gov/2.3/reprMathFunction.owl#ExponentialFunction>

### 6.6.4. `wcseo:bandSequence`

The `wcseo:bandSequence` element used in the `wcseo:RGBgenerationHint` is defined as type `NameTriple` which is a space delimited list of three elements of type `anyURI`. Typically these three elements each reference a `name` attribute of a `swe:field` element. An additional option is to define three arithmetic expression like `"band1"*1/3+"band2"*2/3`. Note that the arithmetic expressions themselves need to be URL-encoded and particularly must not include spaces. A valid example would be `band1%2F3%2Bband2%2A2%2F3 band1%2A2%2F3%2Bband2%2F3 %28band1%2Bband3%29%2F2`.

### 6.6.5. `swe:DataRecord/@definition`

The non-exhaustive list below provides recommendations for the value of the `definition`` attribute of `swe:DataRecord`.

- <http://www.opengis.net/def/property/OGC-E0/0/opt/SpectralMode/PANCHROMATIC>
- <http://www.opengis.net/def/property/OGC-E0/0/opt/SpectralMode/COLOR>
- <http://www.opengis.net/def/property/OGC-E0/0/opt/SpectralMode/MULTISPECTRAL>
- <http://www.opengis.net/def/property/OGC-E0/0/sar/PolarizationMode/HH>
- <http://sweet.jpl.nasa.gov/2.3/stateSpectralBand.owl#Monochromatic>
- <http://sweet.jpl.nasa.gov/2.3/stateSpectralBand.owl#Polychromatic>

The list below shows other possible but not recommended URIs.

- <http://www.opengis.net/def/ogc-eo/opt/SpectralMode/PANCHROMATIC>
- <http://www.opengis.net/def/ogc-eo/opt/SpectralMode/COLOR>
- <http://www.opengis.net/def/order/OGC-E0/0/SpectralBandColorComposition>
- <http://www.opengis.net/def/order/OGC-E0/0/SpectralBandComposition>

### 6.6.6. `swe:field/@name` vs. `swe:field/swe:Quantity/swe:identifier`

The `name` attribute of `swe:field` is defined as type `NCName`. This mainly means that it must not include characters like `:` (colon), `@`, `$`, `%`, `&`, `/`, `+`, `,`, `;`, or any whitespace characters. It further must not start with a number, minus, or dot.

The range subsetting extension of WCS [OGC 12-040] uses this `name` attribute in its `RangeComponent` element to select bands for retrieval.



Coverages, however, may use not `NCName` compliant IDs for their bands. It is, for example, quite common to identify variables within a netCDF file with strings including blanks or colons.

The `swe:field` element includes in its `swe:Quantity` element a `swe:identifier` element which is of type anyURI and can potentially hold any complex ID given it is URL-encoded.

For coverages using non `NCName` IDs for their bands it is recommended to provide the full IDs, potentially URL-encoded, in the `swe:identifier` element. It is further recommended to use the respective first word (`NCNAME` type substring i.e. starting from it's first character up to and excluding the first character which is not allowed in an `NCName`) of the IDs for the `name` attributes.

For example an ID of `gray band` should use `gray` for the `name` attribute and `gray%20band` for the `swe:identifier` element.

### 6.6.7. `swe:nilValue/@reason`

The recommendations for the value of the `reason` attribute of `swe:nilValue` are given below.

- <http://www.opengis.net/def/nil/OGC/0/unknown>
- <http://www.opengis.net/def/nil/OGC/0/BelowDetectionRange>
- <http://www.opengis.net/def/nil/OGC/0/AboveDetectionRange>
- <http://www.opengis.net/def/nil/OGC/0/inapplicable>
- <http://www.opengis.net/def/nil/OGC/0/missing>
- <http://www.opengis.net/def/nil/OGC/0/template>
- <http://www.opengis.net/def/nil/OGC/0/withheld>

## 6.7. Examples

The following provides an example `gmlcov:rangeType` element including additional range type information for RGB generation on `swe:DataRecord` level as well as data conversion information on `swe:Quantity` level.

```
<gmlcov:rangeType>
  <swe:DataRecord definition="http://www.opengis.net/def/property/OGC-
EO/0/opt/SpectralMode/PANCHROMATIC">
    <swe:extension>
      <wcseo:rangeTypeExtension>
        <wcseo:RGBgenerationHint>
          <wcseo:bandSequence>gray gray gray</wcseo:bandSequence>
          <wcseo:intervalFrom>1 4095</wcseo:intervalFrom>
          <wcseo:intervalTo>1 255</wcseo:intervalTo>
        </wcseo:RGBgenerationHint>
      </wcseo:rangeTypeExtension>
    </swe:extension>
  </swe:DataRecord>
</gmlcov:rangeType>
```

```

<wcseo:type>http://sweet.jpl.nasa.gov/2.3/reprMathFunction.owl#Logarithmic</wcseo:type>
  </wcseo:RGBgenerationHint>
  </wcseo:rangeTypeExtension>
</swe:extension>
<swe:label>Gray Channel/Band</swe:label>
<swe:field name="gray">
  <swe:Quantity definition=
"http://sweet.jpl.nasa.gov/2.3/propEnergyFlux.owl#SpectralRadiance">
    <swe:extension>
      <wcseo:rangeTypeExtension>

<wcseo:dataSemantics>http://sweet.jpl.nasa.gov/2.3/stateSpectralBand.owl#Visible</wcseo:dataSemantics>

<wcseo:dataType>http://www.opengis.net/def/dataType/OGC/0/unsignedShort</wcseo:
dataType>
  <wcseo:dataType2dataSemantics>
    <wcseo:intervalFrom>1 4095</wcseo:intervalFrom>
    <wcseo:intervalTo>390.0000 780.0000</wcseo:intervalTo>

<wcseo:type>http://sweet.jpl.nasa.gov/2.3/reprMathFunction.owl#Linear</wcseo:ty
pe>
  </wcseo:dataType2dataSemantics>
  </wcseo:rangeTypeExtension>
</swe:extension>
<swe:identifier>gray</swe:identifier>
<swe:label>Gray Channel/Band</swe:label>
<swe:description>Gray Channel/Band</swe:description>
<swe:nilValues>
  <swe:nilValues>
    <swe:nilValue reason="http://www.opengis.net/def/nil/OGC/0/unknown
">0</swe:nilValue>
  </swe:nilValues>
</swe:nilValues>
<swe:uom code="W.m-2.sr-1.nm-1"/>
<swe:constraint>
  <swe:AllowedValues>
    <swe:interval>0 4095</swe:interval>
    <swe:significantFigures>4</swe:significantFigures>
  </swe:AllowedValues>
</swe:constraint>
</swe:Quantity>
</swe:field>
</swe:DataRecord>
</gmlcov:rangeType>

```

The following is an example of a multispectral range type.

```
<gmlcov:rangeType>
  <swe:DataRecord definition="http://www.opengis.net/def/property/OGC-
EO/0/opt/SpectralMode/MULTISPECTRAL">
    <swe:extension>
      <wcseo:rangeTypeExtension>
        <wcseo:RGBgenerationHint>
          <wcseo:bandSequence>red green blue</wcseo:bandSequence>
          <wcseo:intervalFrom>1 65535</wcseo:intervalFrom>
          <wcseo:intervalTo>1 255</wcseo:intervalTo>

<wcseo:type>http://sweet.jpl.nasa.gov/2.3/reprMathFunction.owl#Logarithmic</wcseo:type>
      </wcseo:RGBgenerationHint>
    </wcseo:rangeTypeExtension>
  </swe:extension>
  <swe:label>Multispectral product</swe:label>
  <swe:field name="blue">
    <swe:Quantity definition=
"http://sweet.jpl.nasa.gov/2.3/propEnergyFlux.owl#SpectralRadiance">
      <swe:extension>
        <wcseo:rangeTypeExtension>

<wcseo:dataSemantics>http://sweet.jpl.nasa.gov/2.3/stateSpectralBand.owl#Blue</wcseo:dataSemantics>

<wcseo:dataType>http://www.opengis.net/def/dataType/OGC/0/unsignedShort</wcseo:
dataType>
      <wcseo:dataType2dataSemantics>
        <wcseo:intervalFrom>1 65535</wcseo:intervalFrom>
        <wcseo:intervalTo>455.0 492.0</wcseo:intervalTo>

<wcseo:type>http://sweet.jpl.nasa.gov/2.3/reprMathFunction.owl#Linear</wcseo:ty
pe>
      </wcseo:dataType2dataSemantics>
    </wcseo:rangeTypeExtension>
  </swe:extension>
  <swe:identifier>blue</swe:identifier>
  <swe:label>Blue Channel/Band</swe:label>
  <swe:description>Blue Channel/Band</swe:description>
  <swe:nilValues>
    <swe:nilValues>
      <swe:nilValue reason="http://www.opengis.net/def/nil/OGC/0/unknown
">0</swe:nilValue>
    </swe:nilValues>
```

```

</swe:nilValues>
<swe:uom code="W.m-2.sr-1.nm-1"/>
<swe:constraint>
  <swe:AllowedValues>
    <swe:interval>0 65535</swe:interval>
    <swe:significantFigures>5</swe:significantFigures>
  </swe:AllowedValues>
</swe:constraint>
</swe:Quantity>
</swe:field>
<swe:field name="green">
  <swe:Quantity definition=
"http://sweet.jpl.nasa.gov/2.3/propEnergyFlux.owl#SpectralRadiance">
    <swe:extension>
      <wcseo:rangeTypeExtension>

<wcseo:dataSemantics>http://sweet.jpl.nasa.gov/2.3/stateSpectralBand.owl#Green<
/wcseo:dataSemantics>

<wcseo:dataType>http://www.opengis.net/def/dataType/OGC/0/unsignedShort</wcseo:
dataType>
  <wcseo:dataType2dataSemantics>
    <wcseo:intervalFrom>1 65535</wcseo:intervalFrom>
    <wcseo:intervalTo>492.0 557.0</wcseo:intervalTo>

<wcseo:type>http://sweet.jpl.nasa.gov/2.3/reprMathFunction.owl#Linear</wcseo:ty
pe>
  </wcseo:dataType2dataSemantics>
  </wcseo:rangeTypeExtension>
</swe:extension>
<swe:identifier>green</swe:identifier>
<swe:label>Green Channel/Band</swe:label>
<swe:description>Green Channel/Band</swe:description>
<swe:nilValues>
  <swe:NilValues>
    <swe:nilValue reason="http://www.opengis.net/def/nil/OGC/0/unknown
">0</swe:nilValue>
  </swe:NilValues>
</swe:nilValues>
<swe:uom code="W.m-2.sr-1.nm-1"/>
<swe:constraint>
  <swe:AllowedValues>
    <swe:interval>0 65535</swe:interval>
    <swe:significantFigures>5</swe:significantFigures>
  </swe:AllowedValues>
</swe:constraint>
</swe:Quantity>

```

```

</swe:field>
<swe:field name="yellow">
  <swe:Quantity definition=
"http://sweet.jpl.nasa.gov/2.3/propEnergyFlux.owl#SpectralRadiance">
    <swe:extension>
      <wcseo:rangeTypeExtension>

<wcseo:dataSemantics>http://sweet.jpl.nasa.gov/2.3/stateSpectralBand.owl#Yellow
</wcseo:dataSemantics>

<wcseo:dataType>http://www.opengis.net/def/dataType/OGC/0/unsignedShort</wcseo:
dataType>
  <wcseo:dataType2dataSemantics>
    <wcseo:intervalFrom>1 65535</wcseo:intervalFrom>
    <wcseo:intervalTo>557.0 597.0</wcseo:intervalTo>

<wcseo:type>http://sweet.jpl.nasa.gov/2.3/reprMathFunction.owl#Linear</wcseo:ty
pe>
  </wcseo:dataType2dataSemantics>
  </wcseo:rangeTypeExtension>
</swe:extension>
<swe:identifier>yellow</swe:identifier>
<swe:label>Yellow Channel/Band</swe:label>
<swe:description>Yellow Channel/Band</swe:description>
<swe:nilValues>
  <swe:nilValues>
    <swe:nilValue reason="http://www.opengis.net/def/nil/OGC/0/unknown
">0</swe:nilValue>
  </swe:nilValues>
</swe:nilValues>
<swe:uom code="W.m-2.sr-1.nm-1"/>
<swe:constraint>
  <swe:AllowedValues>
    <swe:interval>0 65535</swe:interval>
    <swe:significantFigures>5</swe:significantFigures>
  </swe:AllowedValues>
</swe:constraint>
</swe:Quantity>
</swe:field>
<swe:field name="orange">
  <swe:Quantity definition=
"http://sweet.jpl.nasa.gov/2.3/propEnergyFlux.owl#SpectralRadiance">
    <swe:extension>
      <wcseo:rangeTypeExtension>

<wcseo:dataSemantics>http://sweet.jpl.nasa.gov/2.3/stateSpectralBand.owl#Orange
</wcseo:dataSemantics>

```

```

<wcseo:datatype>http://www.opengis.net/def/datatype/OGC/0/unsignedShort</wcseo:
datatype>
    <wcseo:datatype2dataSemantics>
        <wcseo:intervalFrom>1 65535</wcseo:intervalFrom>
        <wcseo:intervalTo>597.0 622.0</wcseo:intervalTo>

<wcseo:type>http://sweet.jpl.nasa.gov/2.3/reprMathFunction.owl#Linear</wcseo:ty
pe>
    </wcseo:datatype2dataSemantics>
    </wcseo:rangeTypeExtension>
</swe:extension>
<swe:identifier>orange</swe:identifier>
<swe:label>Orange Channel/Band</swe:label>
<swe:description>Orange Channel/Band</swe:description>
<swe:nilValues>
    <swe:nilValues>
        <swe:nilValue reason="http://www.opengis.net/def/nil/OGC/0/unknown
">0</swe:nilValue>
    </swe:nilValues>
</swe:nilValues>
<swe:uom code="W.m-2.sr-1.nm-1"/>
<swe:constraint>
    <swe:AllowedValues>
        <swe:interval>0 65535</swe:interval>
        <swe:significantFigures>5</swe:significantFigures>
    </swe:AllowedValues>
</swe:constraint>
</swe:Quantity>
</swe:field>
<swe:field name="red">
    <swe:Quantity definition=
"http://sweet.jpl.nasa.gov/2.3/propEnergyFlux.owl#SpectralRadiance">
        <swe:extension>
            <wcseo:rangeTypeExtension>

<wcseo:dataSemantics>http://sweet.jpl.nasa.gov/2.3/stateSpectralBand.owl#Red</w
cseo:dataSemantics>

<wcseo:datatype>http://www.opengis.net/def/datatype/OGC/0/unsignedShort</wcseo:
datatype>
    <wcseo:datatype2dataSemantics>
        <wcseo:intervalFrom>1 65535</wcseo:intervalFrom>
        <wcseo:intervalTo>622.0 780.0</wcseo:intervalTo>

<wcseo:type>http://sweet.jpl.nasa.gov/2.3/reprMathFunction.owl#Linear</wcseo:ty
pe>

```

```

        </wcseo:dataType2dataSemantics>
        </wcseo:rangeTypeExtension>
    </swe:extension>
    <swe:identifier>red</swe:identifier>
    <swe:label>Red Channel/Band</swe:label>
    <swe:description>Red Channel/Band</swe:description>
    <swe:nilValues>
        <swe:nilValues>
            <swe:nilValue reason="http://www.opengis.net/def/nil/OGC/0/unknown
">0</swe:nilValue>
        </swe:nilValues>
    </swe:nilValues>
    <swe:uom code="W.m-2.sr-1.nm-1"/>
    <swe:constraint>
        <swe:AllowedValues>
            <swe:interval>0 65535</swe:interval>
            <swe:significantFigures>5</swe:significantFigures>
        </swe:AllowedValues>
    </swe:constraint>
</swe:Quantity>
</swe:field>
</swe:DataRecord>
</gmlcov:rangeType>

```

# Chapter 7. Coverage Collections

WCS originally was perceived to give access to single coverages taken from a flat set of coverage offerings on the server.

This approach was based on the classical subdivision into metadata services (i.e., catalogs) and data services, connected through some loose coupling (which effectively was never standardized beyond the recommendation to use URLs).

With the progress of requirements and technology it is more and more considered important to merge data and metadata perspectives with the vision of a common integrated information space.

For WCS, this means in particular to further structure a server's offering of coverages along various criteria.

Early on EO-WCS has provided a lead in this by introducing both uniform and non-uniform coverage groupings together with dedicated search functionality which is able to perform a focused search within coverage subsets.

With OGC Coverage Implementation Schema (CIS) 1.1 comes massively enhanced support for structuring coverages. Therefore, a harmonization task has to be accomplished to relate both concepts, which may well lead to an extension of functionality for fully exploiting all benefits.

In the following subsections, we discuss EO-relevant grouping concepts, based on CIS and EO-WCS.

## 7.1. Grouping of Associated Data

### 7.1.1. Overview

EO products are typically stored in single files, either using a special binary EO format like NetCDF or ENVISAT N1, a special EO container format like SAFE, e.g. Sentinel-2, or DIMAP, or a general container format like TAR or ZIP. Sometimes EO products are stored as multiple files directly, e.g. Landsat-8.

Modeling the grouped data as coverage itself would directly allow GetCoverage requests but would require rather big changes to WCS. Thus we propose to follow and extend the approach already established in EO-WCS and reuse the concept of Dataset Series.

As a first step, the encoding of multiple coverages, potentially representing an EO Product, in a package format like TAR or ZIP is investigated. Given the new operation GetEOCoverageSet the only point missing is the inclusion of metadata on package level.

Basically the EOMetadata element has been amended to be in the `substitutionGroup` of



`ows:AbstractMetaData` and the choice is extended by references to ISO 19139 `MD_Metadata`, which can be substituted by ISO 19139-2 `MI_Metadata`, and ISO 19115-3 `MD_Metadata`. To recap, the already available options are EO-O&M, or EOP as it is referred to sometimes, or by reference as seen in the example below. A complete [example](#) is provided with the EO-WCS standard.

These choices leave the option to use the concept of Dataset Series for offering collections but also for EO Products. Although named Dataset Series technically speaking it is a heterogeneous grouping of coverages and/or Dataset Series and can thus be used for any other concept like an EO Product containing multiple coverages with different resolutions as well.

The example below shows a complete `DatasetSeries` element including a reference to further metadata.

```

<?xml version="1.0" encoding="UTF-8"?>
<wcseo:DatasetSeries xmlns:ows="http://www.opengis.net/ows/2.0" xmlns:gml=
"http://www.opengis.net/gml/3.2" xmlns:wcs="http://www.opengis.net/wcs/2.0"
xmlns:wcseo="http://www.opengis.net/wcs/wcseo/1.1" xmlns:xlink=
"http://www.w3.org/1999/xlink" xmlns:xsi=
"http://www.w3.org/2001/XMLSchemainstance" xsi:schemaLocation=
"http://www.opengis.net/wcs/wcseo/1.1
http://schemas.opengis.net/wcs/wcseo/1.1/wcsEOAll.xsd">
  <wcseo:DatasetSeriesId>someDatasetSeries1</wcseo:DatasetSeriesId>
  <eop:Footprint gml:id="footprint_someDatasetSeries1">
    <eop:multiExtentOf>
      <gml:MultiSurface gml:id="multisurface_someDatasetSeries1" srsName=
"EPSG:4326">
        <gml:surfaceMembers>
          <gml:Polygon gml:id="polygon_someDatasetSeries1">
            <gml:exterior>
              <gml:LinearRing>
                <gml:posList>43.516667 2.1025 43.381667 2.861667 42.862778 2.65
42.996389 1.896944 43.516667 2.1025</gml:posList>
              </gml:LinearRing>
            </gml:exterior>
          </gml:Polygon>
        </gml:surfaceMembers>
      </gml:MultiSurface>
    </eop:multiExtentOf>
  </eop:Footprint>
  <gml:TimePeriod gml:id="someDatasetSeries1_timeperiod">
    <gml:beginPosition>2008-03-13T00:00:00.000</gml:beginPosition>
    <gml:endPosition>2008-03-13T23:59:59.999</gml:endPosition>
  </gml:TimePeriod>
  <ows:Metadata>
    <wcseo:EOMetadata>
      <ows:Reference xlink:href="http://www.someCatalogue.org/eop-metadatafrom-
someDatasetSeries1" xlink:role="http://standards.iso.org/iso/19115/-3/mdb/1.0"
xlink:title="ISO 19115-3 Metadata" />
    </wcseo:EOMetadata>
  </ows:Metadata>
  <wcseo:rectifiedDataset>
    <wcs:CoverageId>someEOCoverage1</wcs:CoverageId>
  </wcseo:rectifiedDataset>
</wcseo:DatasetSeries>

```

Of course the mechanism of using **Reference** elements in **Metadata** elements can also be used for associated data.

We propose to further investigate if a **GetEOCoverageRequest** together with a **mediaType**

of `multipart/related` is suitable to be used for data access to whole EO Products. In a first step this will be verified using general container formats as written above. The next step then is to investigate the suitability of this approach also for special EO container formats like SAFE and special binary EO formats like NetCDF or ENVISAT N1.

The first part of the multipart response would look like the example below but additionally include `Reference` elements to the associated data inside `Metadata` elements of the `DatasetSeries` element. Of course the second part of the multipart response needs to include all the referenced files.

```
<?xml version="1.0" encoding="UTF-8"?>
<wcseo:E0CoverageSet numberMatched="3" numberReturned="3" xmlns:ows=
"http://www.opengis.net/ows/2.0" xmlns:gml="http://www.opengis.net/gml/3.2"
xmlns:gmlcov="http://www.opengis.net/gmlcov/1.0" xmlns:swe=
"http://www.opengis.net/swe/2.0" xmlns:wcs="http://www.opengis.net/wcs/2.0"
xmlns:wcseo="http://www.opengis.net/wcs/wcseo/1.1" xmlns:eop=
"http://www.opengis.net/eop/2.1" xmlns:om="http://www.opengis.net/om/2.0"
xmlns:xlink="http://www.w3.org/1999/xlink" xmlns:xsi=
"http://www.w3.org/2001/XMLSchema-instance" xsi:schemaLocation=
"http://www.opengis.net/wcs/wcseo/1.1
http://schemas.opengis.net/wcs/wcseo/1.1/wcsEOAll.xsd">
  <wcseo:RectifiedDataset gml:id="someE0Coverage1">
    <gml:boundedBy>
      ...
    </gml:boundedBy>
    <gml:domainSet>
      ...
    </gml:domainSet>
    <gml:rangeSet>
      <gml:File>
        <gml:rangeParameters xlink:arcrole="fileReference" xlink:href=
"cid:coverage.meta4;someE0Coverage1.tif" xlink:role=
"http://www.opengis.net/spec/GMLCOV_geotiff-coverages/1.0/conf/geotiff-
coverage" />
        <gml:fileReference>
cid:coverage.meta4;someE0Coverage1.tif</gml:fileReference>
        <gml:fileStructure />
        <gml:mimeType>image/tiff</gml:mimeType>
      </gml:File>
    </gml:rangeSet>
    <gmlcov:rangeType>
      ...
    </gmlcov:rangeType>
    <gmlcov:metadata>
      <gmlcov:Extension>
        <wcseo:E0Metadata>
```

```

    <eop:EarthObservation gml:id="eop_someEOCoverage1">
      ...
    </eop:EarthObservation>
    <wcseo:lineage>
      <wcseo:referenceGetEOCoverageSet>
        <ows:Reference xlink:href="
http://www.someWCS.org?SERVICE=WCS&VERSION=2.0.1&REQUEST=GetEOCoverageS
et&EID=someDatasetSeries1&PACKAGEFORMAT=application/metalink4+xml&
MEDIATYPE=multipart/related" />
      </wcseo:referenceGetEOCoverageSet>
      <gml:timePosition>2016-05-17T12:25:40Z</gml:timePosition>
    </wcseo:lineage>
    </wcseo:EOMetadata>
  </gmlcov:Extension>
</gmlcov:metadata>
</wcseo:RectifiedDataset>
<wcseo:RectifiedDataset gml:id="someEOCoverage2">
  <gml:boundedBy>
    ...
  </gml:boundedBy>
  <gml:domainSet>
    ...
  </gml:domainSet>
  <gml:rangeSet>
    <gml:File>
      <gml:rangeParameters xlink:arcrole="fileReference" xlink:href=
"cid:coverage.meta4;someEOCoverage2.tif" xlink:role=
"http://www.opengis.net/spec/GMLCOV_geotiff-coverages/1.0/conf/geotiff-
coverage" />
    <gml:fileReference>
cid:coverage.meta4;someEOCoverage2.tif</gml:fileReference>
    <gml:fileStructure />
    <gml:mimeType>image/tiff</gml:mimeType>
  </gml:File>
</gml:rangeSet>
<gmlcov:rangeType>
  ...
</gmlcov:rangeType>
<gmlcov:metadata>
  <gmlcov:Extension>
    <wcseo:EOMetadata>
      <eop:EarthObservation gml:id="eop_someEOCoverage2">
        ...
      </eop:EarthObservation>
    <wcseo:lineage>
      <wcseo:referenceGetEOCoverageSet>
        <ows:Reference xlink:href="

```

```

http://www.someWCS.org?SERVICE=WCS&VERSION=2.0.1&REQUEST=GetEOCoverageSet&EID=someDatasetSeries1&PACKAGEFORMAT=application/metalink4+xml&MEDIATYPE=multipart/related" />
    </wcseo:referenceGetEOCoverageSet>
    <gml:timePosition>2016-05-17T12:25:40Z</gml:timePosition>
  </wcseo:lineage>
</wcseo:EOMetadata>
</gmlcov:Extension>
</gmlcov:metadata>
</wcseo:RectifiedDataset>
<wcseo:DatasetSeries>
  <wcseo:DatasetSeriesId>someDatasetSeries1</wcseo:DatasetSeriesId>
  <eop:Footprint gml:id="footprint_someDatasetSeries1">
    ...
  </eop:Footprint>
  <gml:TimePeriod gml:id="someDatasetSeries1_timeperiod">
    ...
  </gml:TimePeriod>
  <ows:Metadata>
    <wcseo:EOMetadata>
      <ows:Reference xlink:href="http://www.someCatalogue.org/eop-metadatafrom-someDatasetSeries1" xlink:role="http://standards.iso.org/iso/19115/-3/mdb/1.0" xlink:title="ISO 19115-3 Metadata" />
    </wcseo:lineage>
    <wcseo:referenceGetEOCoverageSet>
      <ows:Reference xlink:href="http://www.someWCS.org?SERVICE=WCS&VERSION=2.0.1&REQUEST=GetEOCoverageSet&EID=someDatasetSeries1&PACKAGEFORMAT=application/metalink4+xml&MEDIATYPE=multipart/related"/>
    </wcseo:referenceGetEOCoverageSet>
    <gml:timePosition>2016-05-17T12:25:40Z</gml:timePosition>
  </wcseo:lineage>
</wcseo:EOMetadata>
</ows:Metadata>
<wcseo:rectifiedDataset>
  <wcs:CoverageId>someEOCoverage1</wcs:CoverageId>
</wcseo:rectifiedDataset>
<wcseo:rectifiedDataset>
  <wcs:CoverageId>someEOCoverage2</wcs:CoverageId>
</wcseo:rectifiedDataset>
</wcseo:DatasetSeries>
</wcseo:EOCoverageSet>

```

An additional consideration is to harmonize this proposal with EO-O&M as adopted by EO-WCS. EO-O&M is designed to define a catalog record for one EO product including links to various raster or vector features like measurements, browses, masks, etc.

## 7.2. Collection and Product Registration

### 7.2.1. Overview

We propose to include a high level description of a HTTP REST API to programmatic register collections and products in ODA Systems.

The API needs to specify the request and response structure as well as the payloads. Both, particularly the payload, depend heavily on the functionality available in concrete implementations. Thus we propose to evaluate the suitability to specify collection and product registration including suitability to specify a minimal set of services an ODA System has to support.

The GeoServer REST API 20 serves as basis for our proposal.

TODO

## 7.3. Uniform Coverage Grouping

### 7.3.1. Overview

We propose to carefully review to which extent the forthcoming CIS 1.1 is prepared for this. CIS 1.1 offers a conformance class, coverage-partitioning, which allows splitting a coverage into pieces - in other words, a coverage can be composed from sub-coverages. This nesting of coverages actually is recursive, allowing to establish hierarchically nested coverages.

As the new partitioning functionality of CIS 1.1 still defines a - partitioned - coverage the same homogeneity criteria hold as for "atomic" coverages: they must have a common range type and common range components ("bands", "variables") must not overlap. The latter means: different sub-coverages can overlap only when contributing to different range components. EO-WCS, on the contrary, allows coverages to overlap in a grouping, both in DatasetSeries as well as StitchedMosaics.

In the latter, StitchedMosaics, the extra concept of a "contributing footprint" captures the overlap by indicating which pixel contributes to the coverage - effectively, the contributing footprint acts like a mask blanking out parts of a coverage, thereby achieving a unique pixel for each position while retaining overlap information. This - more involved - concept is not directly supported by the CIS 1.1 partitioning.

TODO Idea: Derive DatasetSeries subtype where rangeType is fixed for all included coverages (maybe using schematron?). Make sure that this subtype is substitutable (substitutionGroup?) and instances still validate against EO- WCS 1.1 schemas.

# Chapter 8. Condense Coverage

## Description Information

### 8.1. Overview

OpenSearch is the designated EVO-ODAS endorsed search service. Thus we propose to extend OpenSearch in a way to allow clients to specify the verbosity of the answer using a new parameter named **view**. Several allowed values are defined in that proposal ranging from **full** for everything to **geotime** for a very limited view only including id, name, bbox, start, and end.

Additionally, there is the idea of adding histogram like functionality i.e., requesting summary information for defined buckets like months.

It should be noted that there exists an alternative approach to searching which is based on XPath enabling traversal and subsetting of a server's XML information hierarchy.

Although XPath looks like a promising approach there are some difficulties particularly from an implementation point of view. In general, an XML document can only be subsetted using XPath once it has been generated. This approach wouldn't scale well on server implementations. Of course particular queries can be computed on the fly but to allow generic XPath queries is quite challenging.

Another issue is, that XPath returns subsets of XML documents without maintaining overlying hierarchy. While it is simple to retrieve a list of coverage IDs for certain search criteria it is difficult if not impossible to retrieve for the same list of coverages tailored coverage descriptions only containing ID, phenomenon time, and footprint.

Further challenges arise when the query is supposed to contain time or spatial subsetting.

OpenSearch and XPath are not competing, but complementary approaches: OpenSearch empowers users to do human-centric search through keywords. XPath, conversely, enables fine-grain drilling into the server's information structure and, hence, is suitable in particular for machine-to-machine communication.

Both search types, therefore, are important for versatile coverage services. In EVO-ODAS, the OpenSearch avenue will be elaborated.

TODO

### 8.2. OpenSearch **view** parameter

## 8.2.1. Objective

This proposal adds support for different levels of verbosity in OpenSearch responses. Clients mainly need a complete and detailed view on the result set but for example to show data availability on a time slider only a limited view is needed. This limited view provides a great opportunity for performance optimization, in response generation time on the server, in response size and thus transfer time, and in response parsing time on the client.

The proposal adds a parameter named **view** to the OpenSearch URL template using the OpenSearch Parameter extension. It further defines several mandatory and optional options for predefined values for the new parameter including the definition of the content of response. Additionally it leaves room to add custom options as needed.

This shows an example of an **Url** element using the **view** parameter:

```
<Url xmlns:param="http://a9.com/-/spec/opensearch/extensions/parameters/1.0/"
      xmlns:eo="http://a9.com/-/opensearch/extensions/eo/1.0/"
      type="application/atom+xml"
      rel="collection"
      template="http://example.com/atom?q={searchTerms}&view={eo:view}">
  <param:Parameter name="view"
    value="{eo:view}"
    title="Verbosity of the response. Default: full"
    pattern="full|brief|geotime"
    minimum="0">
    <param:Option value="full" label="Complete and detailed view."/>
    <param:Option value="brief" label="Brief view to get a quick impression."/>
    <param:Option value="geotime" label="View to show data availability on a
time slider."/>
  </param:Parameter>
</Url>
```

## 8.2.2. **view** Parameter

The new **view** parameter reuses the namespace of the OGC® OpenSearch Extension for Earth Observation [OGC 13-026r8]. It is used as **view={eo:view}** in the template attribute of **Url** elements.

The following mandatory and optional option values are defined:

- **full** - mandatory - Complete and detailed view.
- **brief** - mandatory - Brief view to get a quick impression.
- **geotime** - optional - View to show data availability on a time slider.
- **TODO**





Not all options have to necessarily be made available with each format. The **geotime** option for example might be available with JSON or CSV formatting but not with ATOM.

### full

TODO: Use full EOP

### brief

TODO: Check with CSW

### geotime

Using this option returns the needed metadata to show data availability on a time slider. The needed metadata are identifier, name, bounding box or footprint in EPSG:4326, start time, and end time.

This is a response example in CSV format:

```
"identifier","name","bbox","starttime","endtime"
"1","Satellite image","(40,10,50,20)","2016-04-20T00:00:00Z","2016-04-20T23:59:59Z"
```

### Custom options

TODO

# Chapter 9. WCS Masking Extension

## 9.1. Overview

We propose to extend the GetCoverage request with parameters to request a masking via a mask coverage or polygons e.g. given as GeoJSON or shapefile. The coverage of polygons can be given by reference or, if small enough, included directly in the request in case of polygons as WKT.

The response shall use a defined NoData value for areas outside of the mask.

In the frame of EVO-ODAS this will be described in the EO Data Access Best Practice. Later on this might be promoted to an actual WCS extension.

TODO

# Chapter 10. Conclusions

This section summarizes intended use and benefits of EO-WCS 1.1.

Among others, this might mention that EO-WCS 1.0 has inspired coverage extensions, and it can be expected that EO-WCS 1.1 work will have a similar impact.

TODO

# Bibliography

- [1] OGC 09-153, WCS 2.0 Overview: Core and Extensions, version 1.0.0
- [2] ISO 8601:2004(E) Data elements and interchange formats - Information interchange - Representation of dates and time
- [3] IETF RFC 2616, Hypertext Transfer Protocol — HTTP/1.1. IETF, 1999
- [4] [www.epsg.org](http://www.epsg.org)
- [5] W3C Note 11, SOAP Messages with Attachments. W3C Note 11, 2000
- [6] XML Schema Part 2: Datatypes Second Edition, W3C Recommendation, 2004
- [7] OpenSearch Specification, 1.1, Draft 5
- [8] OGC 09-025r2, OpenGIS Web Feature Service 2.0 Interface Standard - With Corrigendum, version 2.0.2

# Annex A: Revision History

Date	Release	Author	Paragraph modified	Description
TBD	0.0.1	Stephan Meißl	All	Draft proposal from ESA project EVO-ODAS