

Administration Schemas classroom*

SCHEMAS

Filter objects

college

- Tables
- Views
- Stored Procedures
- Functions

sys

marks INT NOT NULL,
grade VARCHAR(1),
city VARCHAR(20)
);

11

12 • INSERT INTO student
(rollno, name, marks, grade, city)
VALUES
(101, "anil", 78, "C", "Pune"),
(102, "bhumika", 93, "A", "Mumbai"),
(103, "chetan", 85, "B", "Mumbai"),
(104, "dhruv", 96, "A", "Delhi"),
(105, "emanuel", 92, "F", "Delhi"),
(106, "farah", 82, "B", "Delhi);

21

22 • SELECT * FROM student;

23

24

25


26

27

130% 3:10

Action Output

	Time	Action	Response
✓	140 16:36:54	DROP table student	0 row(s)
✓	141 16:36:56	DROP table employee	0 row(s)
✓	142 16:37:04	DROP table course	0 row(s)
✓	143 17:00:16	CREATE TABLE student (rollno INT PRIMARY KEY, name VARCHAR(50), marks INT NOT NULL, grade VARCHAR(1)...)	0 row(s)
✓	144 17:00:20	INSERT INTO student (rollno, name, marks, grade, city) VALUES (101, "anil", 78, "C", "Pune"), (102, "bhumika", 93, "A", "Mumbai"), (103, "chetan", 85, "B", "Mumbai"), (104, "dhruv", 96, "A", "Delhi"), (105, "emanuel", 92, "F", "Delhi"), (106, "farah", 82, "B", "Delhi);	6 row(s) affected
✗	145 17:03:46	UPDATE TABLE student SET marks = 92 WHERE rollno = 105	Error Code: 1054
✓	146 17:03:59	UPDATE student SET marks = 92 WHERE rollno = 105	1 row(s) affected

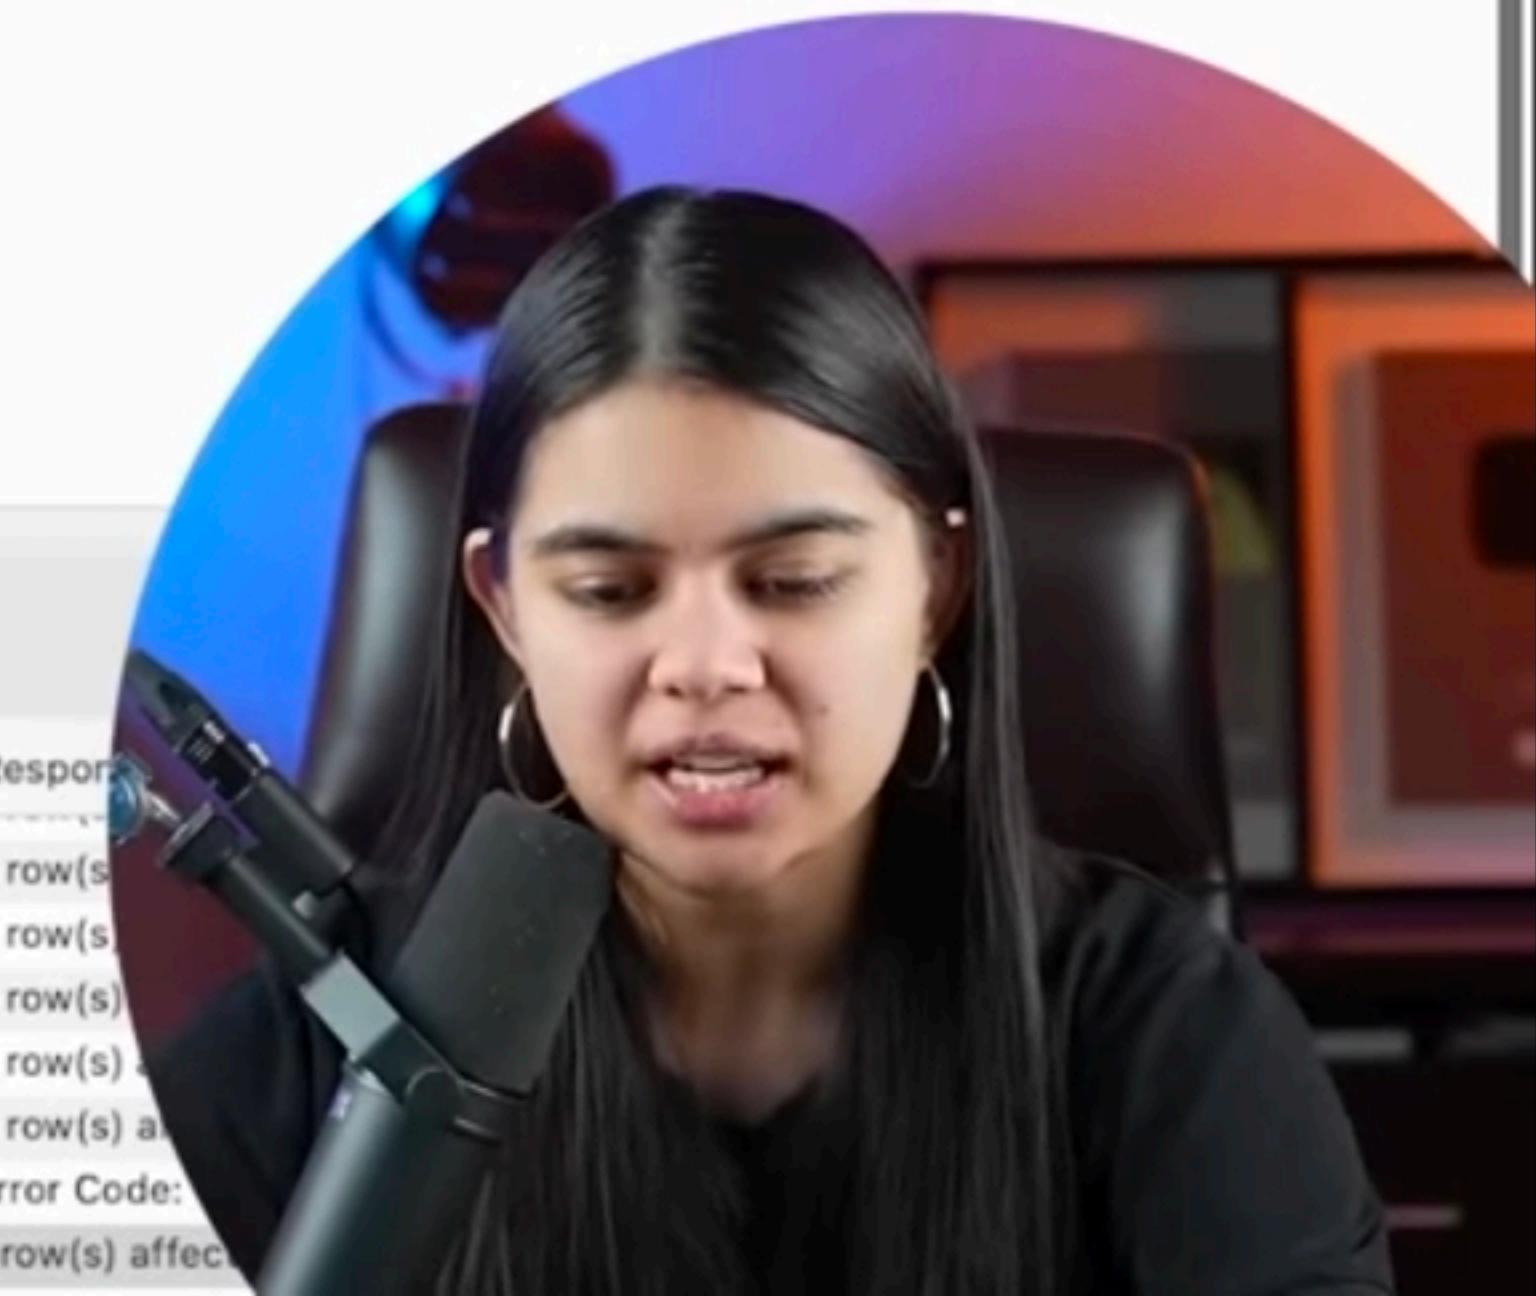

Administration Schemas classroom*

SCHEMAS Filter objects

college

- Tables
- Views
- Stored Procedures
- Functions


sys

9 city VARCHAR(20)
10);
11
12 • INSERT INTO student
13 (rollno, name, marks, grade, city)
14 VALUES
15 (101, "anil", 78, "C", "Pune"),
16 (102, "bhumika", 93, "A", "Mumbai"),
17 (103, "chetan", 85, "B", "Mumbai"),
18 (104, "dhruv", 96, "A", "Delhi"),
19 (105, "emanuel", 92, "F", "Delhi"),
20 (106, "farah", 82, "B", "Delhi);
21
22 • SELECT * FROM student;
23
24 • SELECT AVG(marks)
25 FROM student;
26
27 |
28
29

130% 1:27

Action Output

	Time	Action	Response
✓	142 16:37:04	DROP table course	0 row(s)
✓	143 17:00:16	CREATE TABLE student (rollno INT PRIMARY KEY, name VARCHAR(50), marks INT NOT NULL, grade VARCHAR(1)...)	0 row(s)
✓	144 17:00:20	INSERT INTO student (rollno, name, marks, grade, city) VALUES (101, "anil", 78, "C", "Pune"), (102, "bhumika", 93, "A", "Mumbai"), (103, "chetan", 85, "B", "Mumbai"), (104, "dhruv", 96, "A", "Delhi"), (105, "emanuel", 92, "F", "Delhi"), (106, "farah", 82, "B", "Delhi);	6 row(s)
✗	145 17:03:46	UPDATE TABLE student SET marks = 92 WHERE rollno = 105	Error Code
✓	146 17:03:59	UPDATE student SET marks = 92 WHERE rollno = 105	1 row(s) af
✓	147 17:05:28	SELECT * FROM student LIMIT 0, 1000	6 row(s) ret
✓	148 17:05:52	SELECT AVG(marks) FROM student LIMIT 0, 1000	1 row(s) return

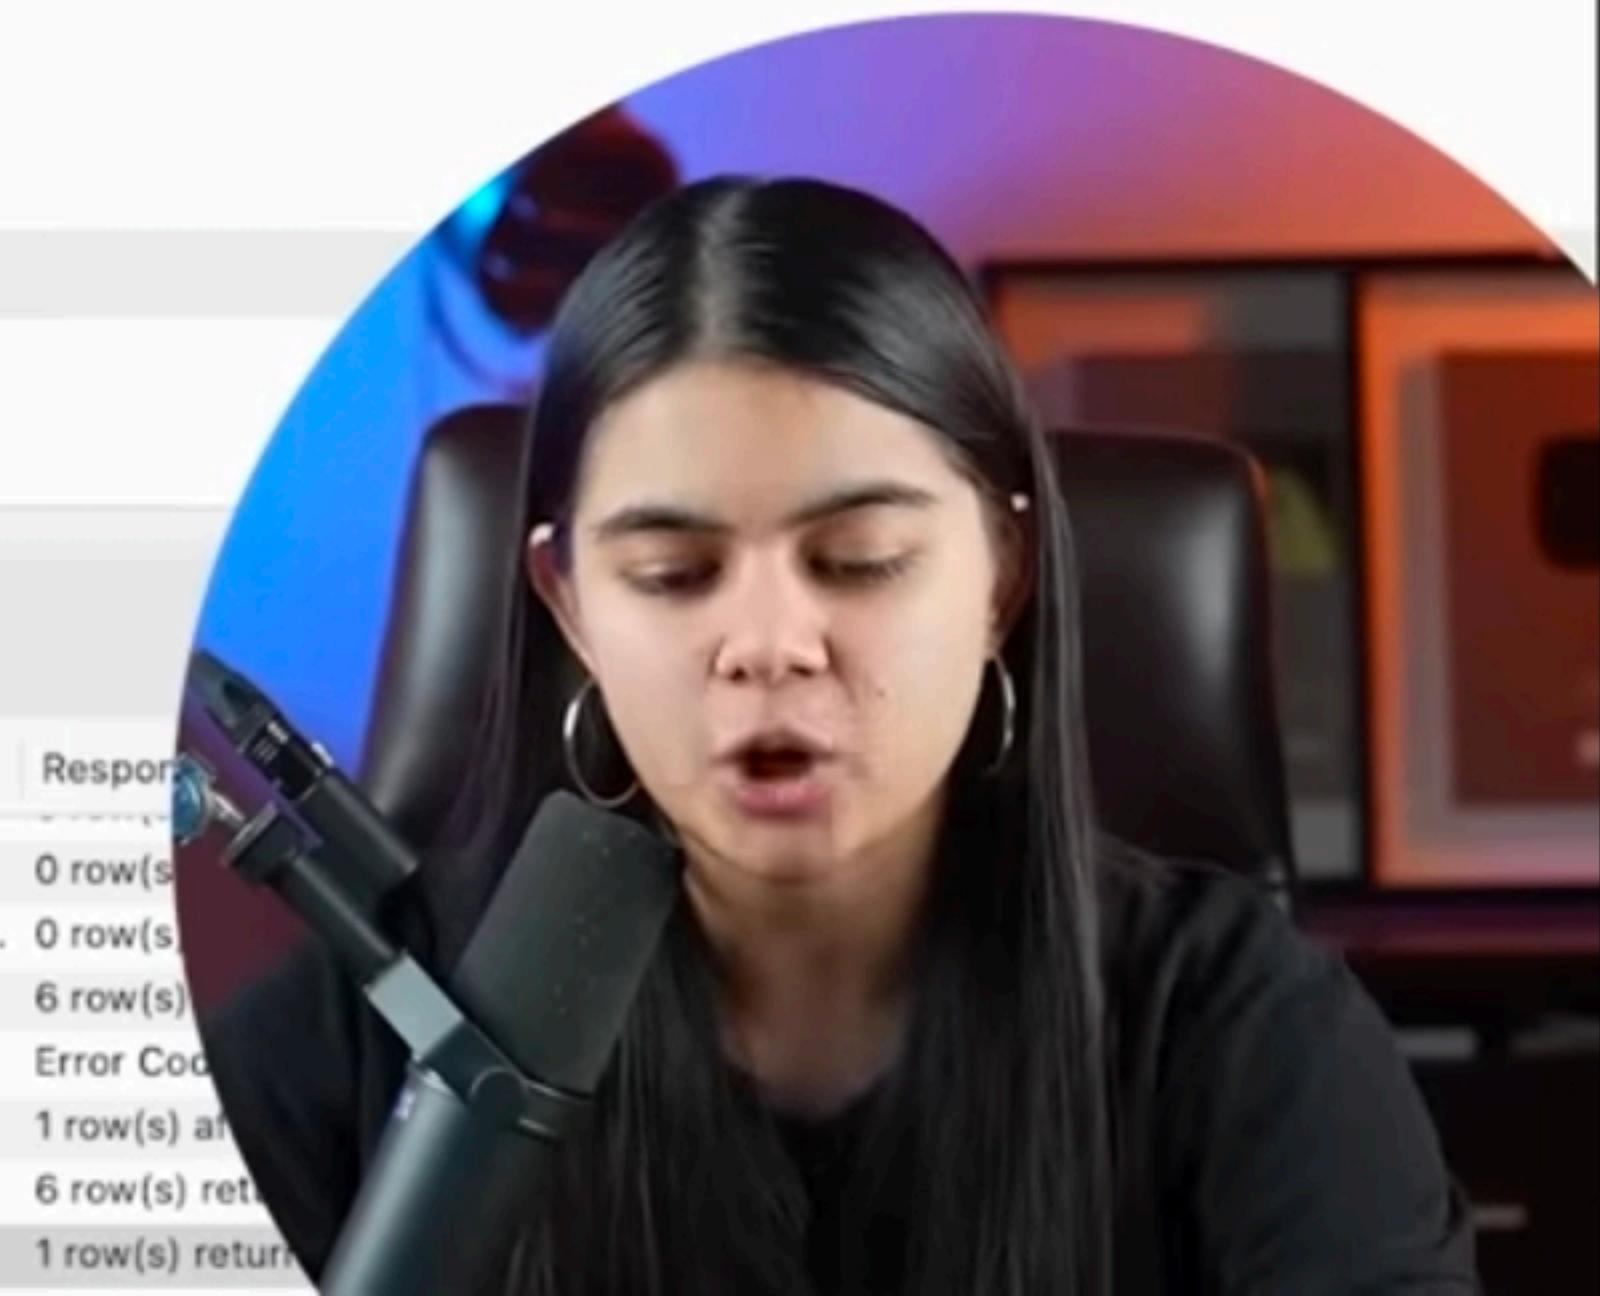

APNA
COLLEGE

Administration Schemas classroom*

SCHEMAS

Filter objects

college

- Tables
- Views
- Stored Procedures
- Functions


sys

18 (104, "dhruv", 96, "A", "Delhi"),
19 (105, "emanuel", 92, "F", "Delhi"),
20 (106, "farah", 82, "B", "Delhi");
21
22 • **SELECT * FROM student;**
23
24 • **SELECT AVG(marks)**
25 **FROM student;**
26
27
28 • **SELECT name**
29 **FROM student**
30 **WHERE marks > 87.6667;**
31
32
33
34
35
36
37
38

130% 12:28

Action Output

	Time	Action	Response
✓	143 17:00:16	CREATE TABLE student (rollno INT PRIMARY KEY, name VARCHAR(50), marks INT NOT NULL, grade VARCHAR(1)... 0 row(s) affected	0 row(s) affected
✓	144 17:00:20	INSERT INTO student (rollno, name, marks, grade, city) VALUES (101, "anil", 78, "C", "Pune"), (102, "bhumika", 93, "A", "Mumbai") 6 row(s) affected	6 row(s) affected
✗	145 17:03:46	UPDATE TABLE student SET marks = 92 WHERE rollno = 105	Error Count: 1
✓	146 17:03:59	UPDATE student SET marks = 92 WHERE rollno = 105	1 row(s) affected
✓	147 17:05:28	SELECT * FROM student LIMIT 0, 1000	6 row(s) returned
✓	148 17:05:52	SELECT AVG(marks) FROM student LIMIT 0, 1000	1 row(s) returned
✓	149 17:06:49	SELECT name FROM student WHERE marks > 87.6667 LIMIT 0, 1000	3 row(s) returned

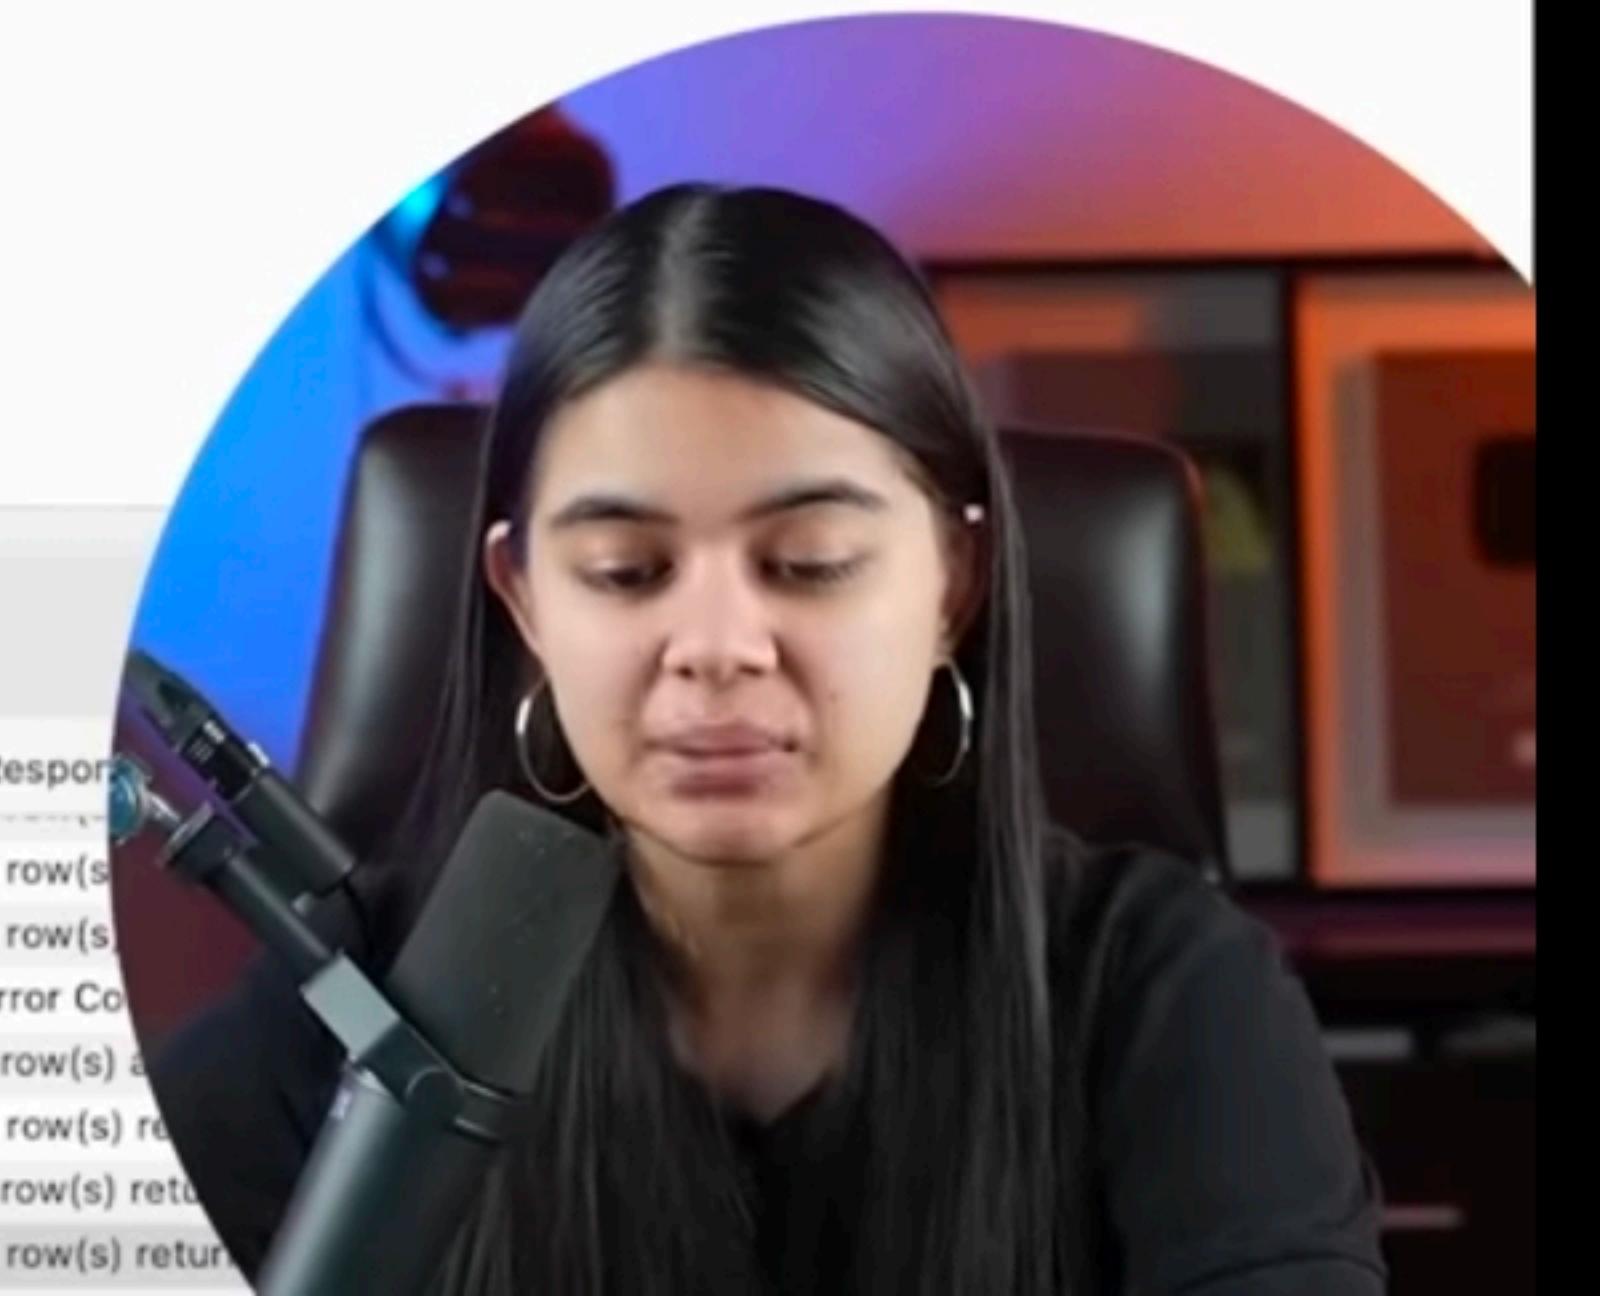

Administration Schemas classroom*

SCHEMAS Filter objects

- college
 - Tables
 - Views
 - Stored Procedures
 - Functions
- sys


Limit to 1000 rows

```
18 (102, "bhumika", 93, "A", "Mumbai"),
19 (103, "chetan", 85, "B", "Mumbai"),
20 (104, "dhruv", 96, "A", "Delhi"),
21 (105, "emanuel", 92, "F", "Delhi"),
22 • SELECT * FROM student;
23
24 • SELECT AVG(marks)
25   FROM student;
26
27
28 • SELECT name, marks
29   FROM student
30 WHERE marks > 87.6667;
31
32
33
34
35
36
```

130% 23:30

Action Output

	Time	Action	Response
✓	144 17:00:20	INSERT INTO student (rollno, name, marks, grade, city) VALUES (101, "anil", 78, "C", "Pune"), (102, "bhumika", 93, "A", "Mumbai"), (103, "chetan", 85, "B", "Mumbai"), (104, "dhruv", 96, "A", "Delhi"), (105, "emanuel", 92, "F", "Delhi")	6 row(s) inserted
✗	145 17:03:46	UPDATE TABLE student SET marks = 92 WHERE rollno = 105	Error Code: 1054
✓	146 17:03:59	UPDATE student SET marks = 92 WHERE rollno = 105	1 row(s) updated
✓	147 17:05:28	SELECT * FROM student LIMIT 0, 1000	6 row(s) returned
✓	148 17:05:52	SELECT AVG(marks) FROM student LIMIT 0, 1000	1 row(s) returned
✓	149 17:06:49	SELECT name FROM student WHERE marks > 87.6667 LIMIT 0, 1000	3 row(s) returned
✓	150 17:07:03	SELECT name, marks FROM student WHERE marks > 87.6667 LIMIT 0, 1000	3 row(s) returned

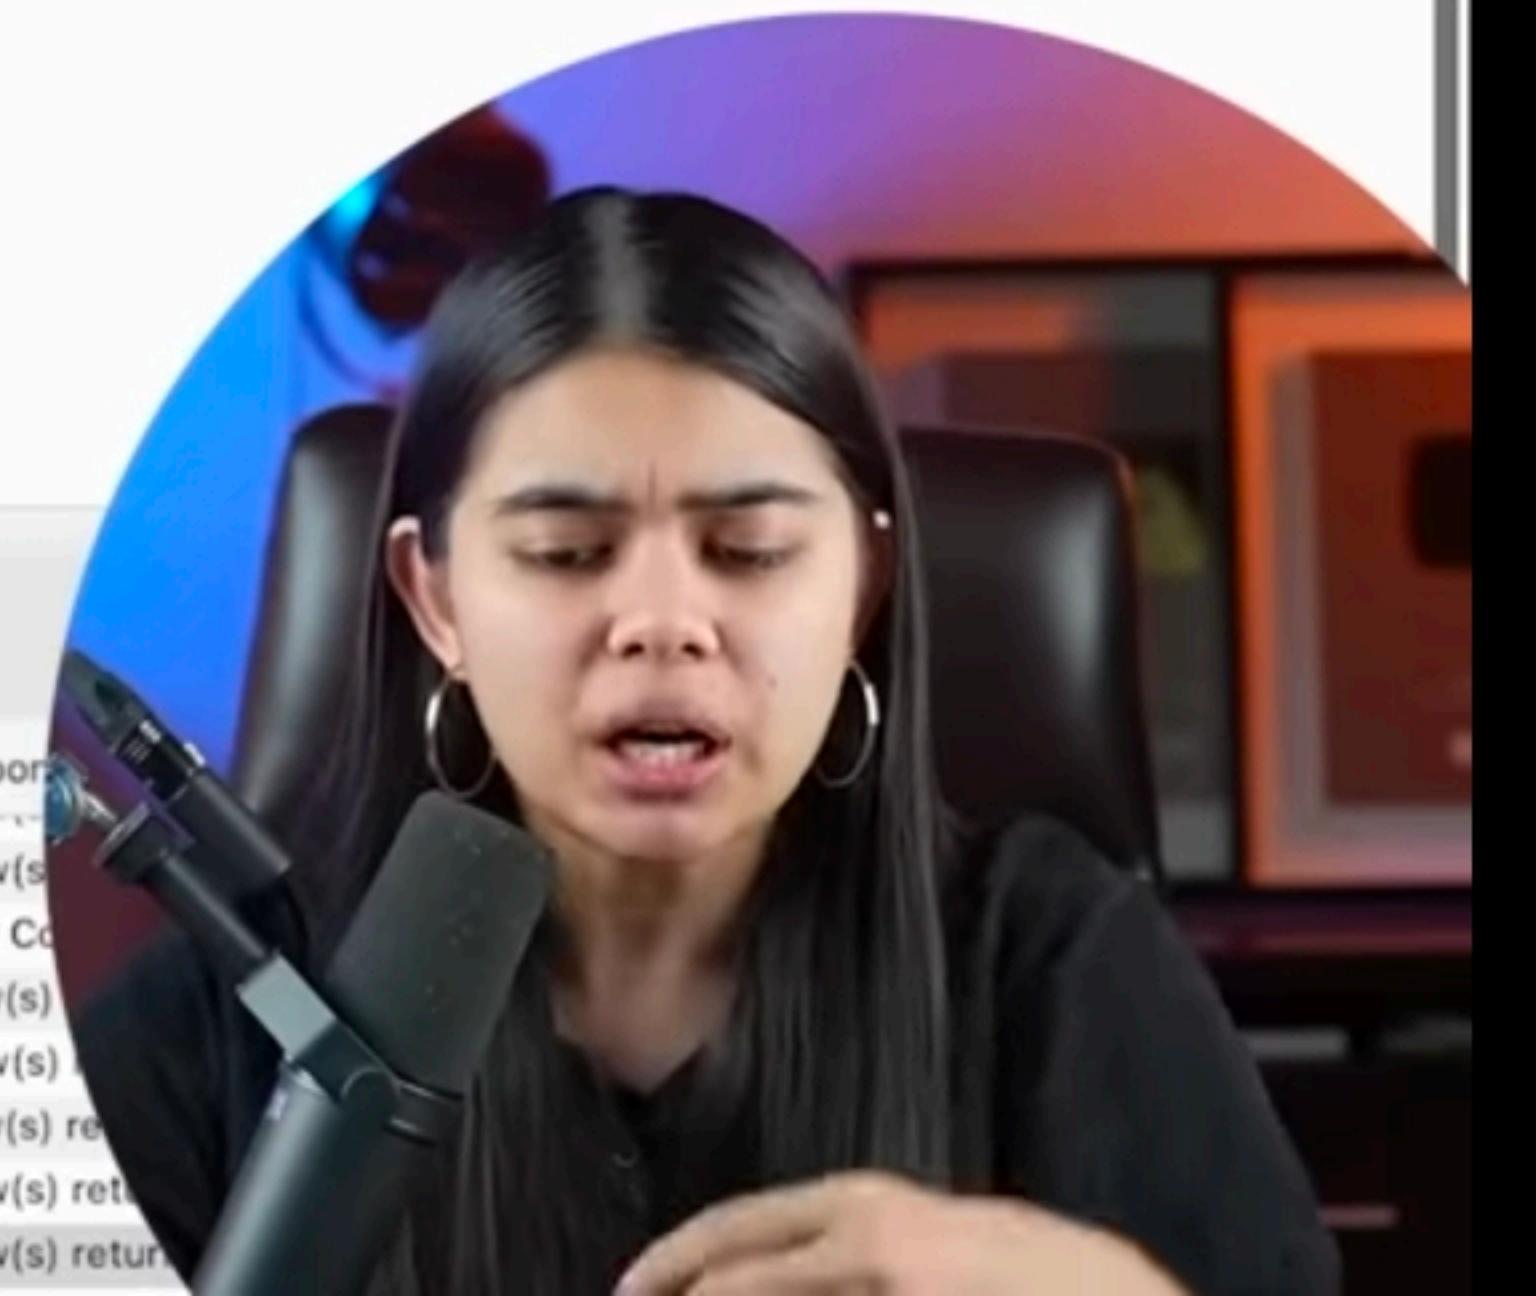

APNA COLLEGE

Administration Schemas classroom*

SCHEMAS Filter objects

college

- Tables
- Views
- Stored Procedures
- Functions


sys

19 (105, "emanuel", 92, "F", "Delhi"),
20 (106, "farah", 82, "B", "Delhi");
21
22 • SELECT * FROM student;
23
24 • SELECT AVG(marks)
25 FROM student;
26
27
28 • SELECT name, marks
29 FROM student
30 WHERE marks > 87.6667;
31
32
33 • SELECT name, marks
34 FROM student
35 WHERE marks > (SELECT AVG(marks) FROM student);
36
37
38
39

130% 46:35

Action Output

	Time	Action	Response
✓	144 17:00:20	INSERT INTO student (rollno, name, marks, grade, city) VALUES (101, "anil", 78, "C", "Pune"), (102, "bhumika", 93, "A", "Mumbai"), (103, "disha", 85, "B", "Delhi"), (104, "evelyn", 90, "A", "Chennai")	6 row(s) inserted
✗	145 17:03:46	UPDATE TABLE student SET marks = 92 WHERE rollno = 105	Error Code: 1054
✓	146 17:03:59	UPDATE student SET marks = 92 WHERE rollno = 105	1 row(s) affected
✓	147 17:05:28	SELECT * FROM student LIMIT 0, 1000	6 row(s) returned
✓	148 17:05:52	SELECT AVG(marks) FROM student LIMIT 0, 1000	1 row(s) returned
✓	149 17:06:49	SELECT name FROM student WHERE marks > 87.6667 LIMIT 0, 1000	3 row(s) returned
✓	150 17:07:03	SELECT name, marks FROM student WHERE marks > 87.6667 LIMIT 0, 1000	3 row(s) returned

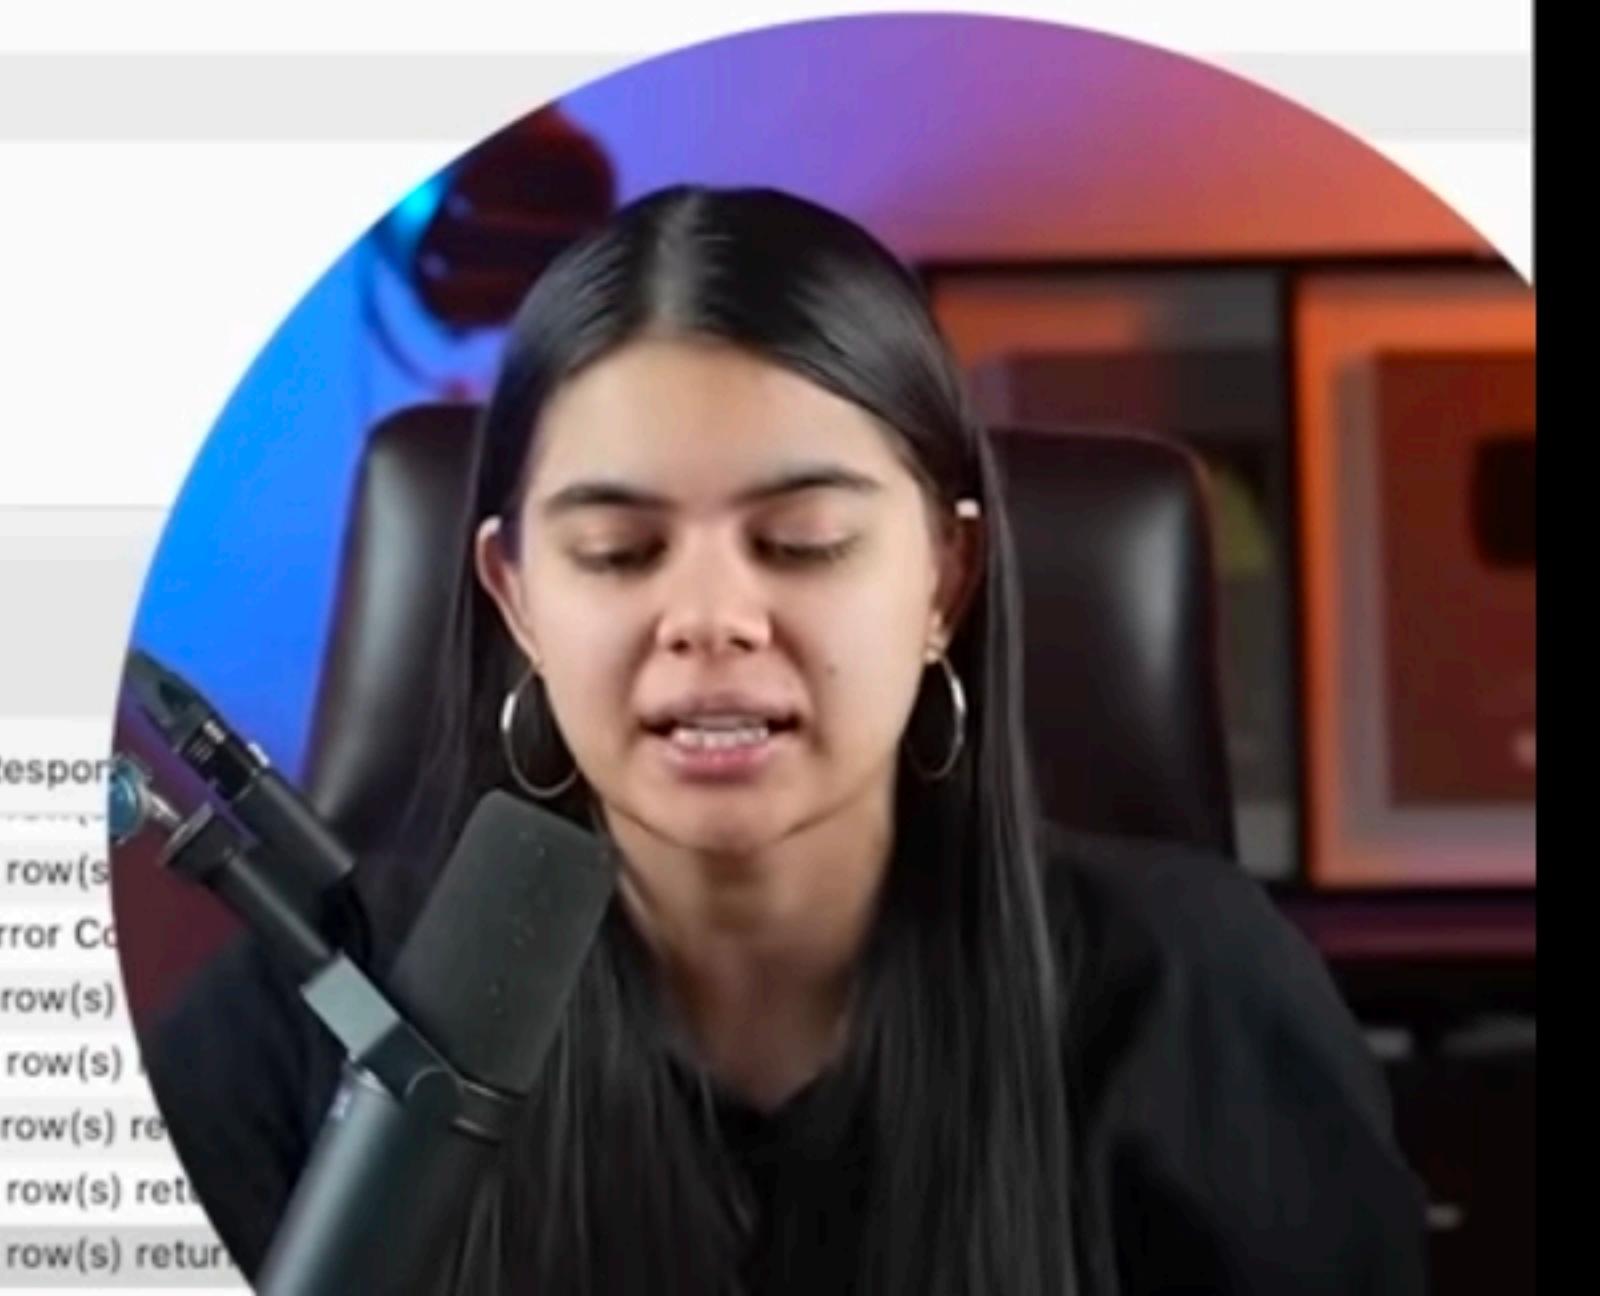

APNA
COLLEGE

Administration Schemas classroom*

SCHEMAS

Filter objects

college

- Tables
- Views
- Stored Procedures
- Functions


sys

14 VALUES
15 (101, "anil", 78, "C", "Pune"),
16 (102, "bhumika", 93, "A", "Mumbai"),
17 (103, "chetan", 85, "B", "Mumbai"),
18 (104, "dhruv", 96, "A", "Delhi"),
19 (105, "emanuel", 92, "F", "Delhi"),
20 (106, "farah", 82, "B", "Delhi");
21
22 • SELECT * FROM student;
23
24 • SELECT rollno
25 FROM student
26 WHERE rollno % 2 = 0;
27
28
29 • SELECT name, rollno
30 FROM student
31 WHERE rollno IN (102, 104, 106);
32
33
34

130% 32:31

Action Output

	Time	Action	Response
148	17:05:52	SELECT AVG(marks) FROM student LIMIT 0, 1000	1 row(s)
149	17:06:49	SELECT name FROM student WHERE marks > 87.6667 LIMIT 0, 1000	3 row(s)
150	17:07:03	SELECT name, marks FROM student WHERE marks > 87.6667 LIMIT 0, 1000	3 row(s)
151	17:09:11	SELECT name, marks FROM student WHERE marks > (SELECT AVG(marks) FROM student) LIMIT 0, 1000	3 row(s)
152	17:13:04	SELECT rollno FROM student WHERE rollno % 2 = 0 LIMIT 0, 1000	3 row(s) re
153	17:13:59	SELECT name FROM student WHERE rollno IN (102, 104, 106) LIMIT 0, 1000	3 row(s) ret
154	17:14:08	SELECT name, rollno FROM student WHERE rollno IN (102, 104, 106) LIMIT 0, 1000	3 row(s) retur

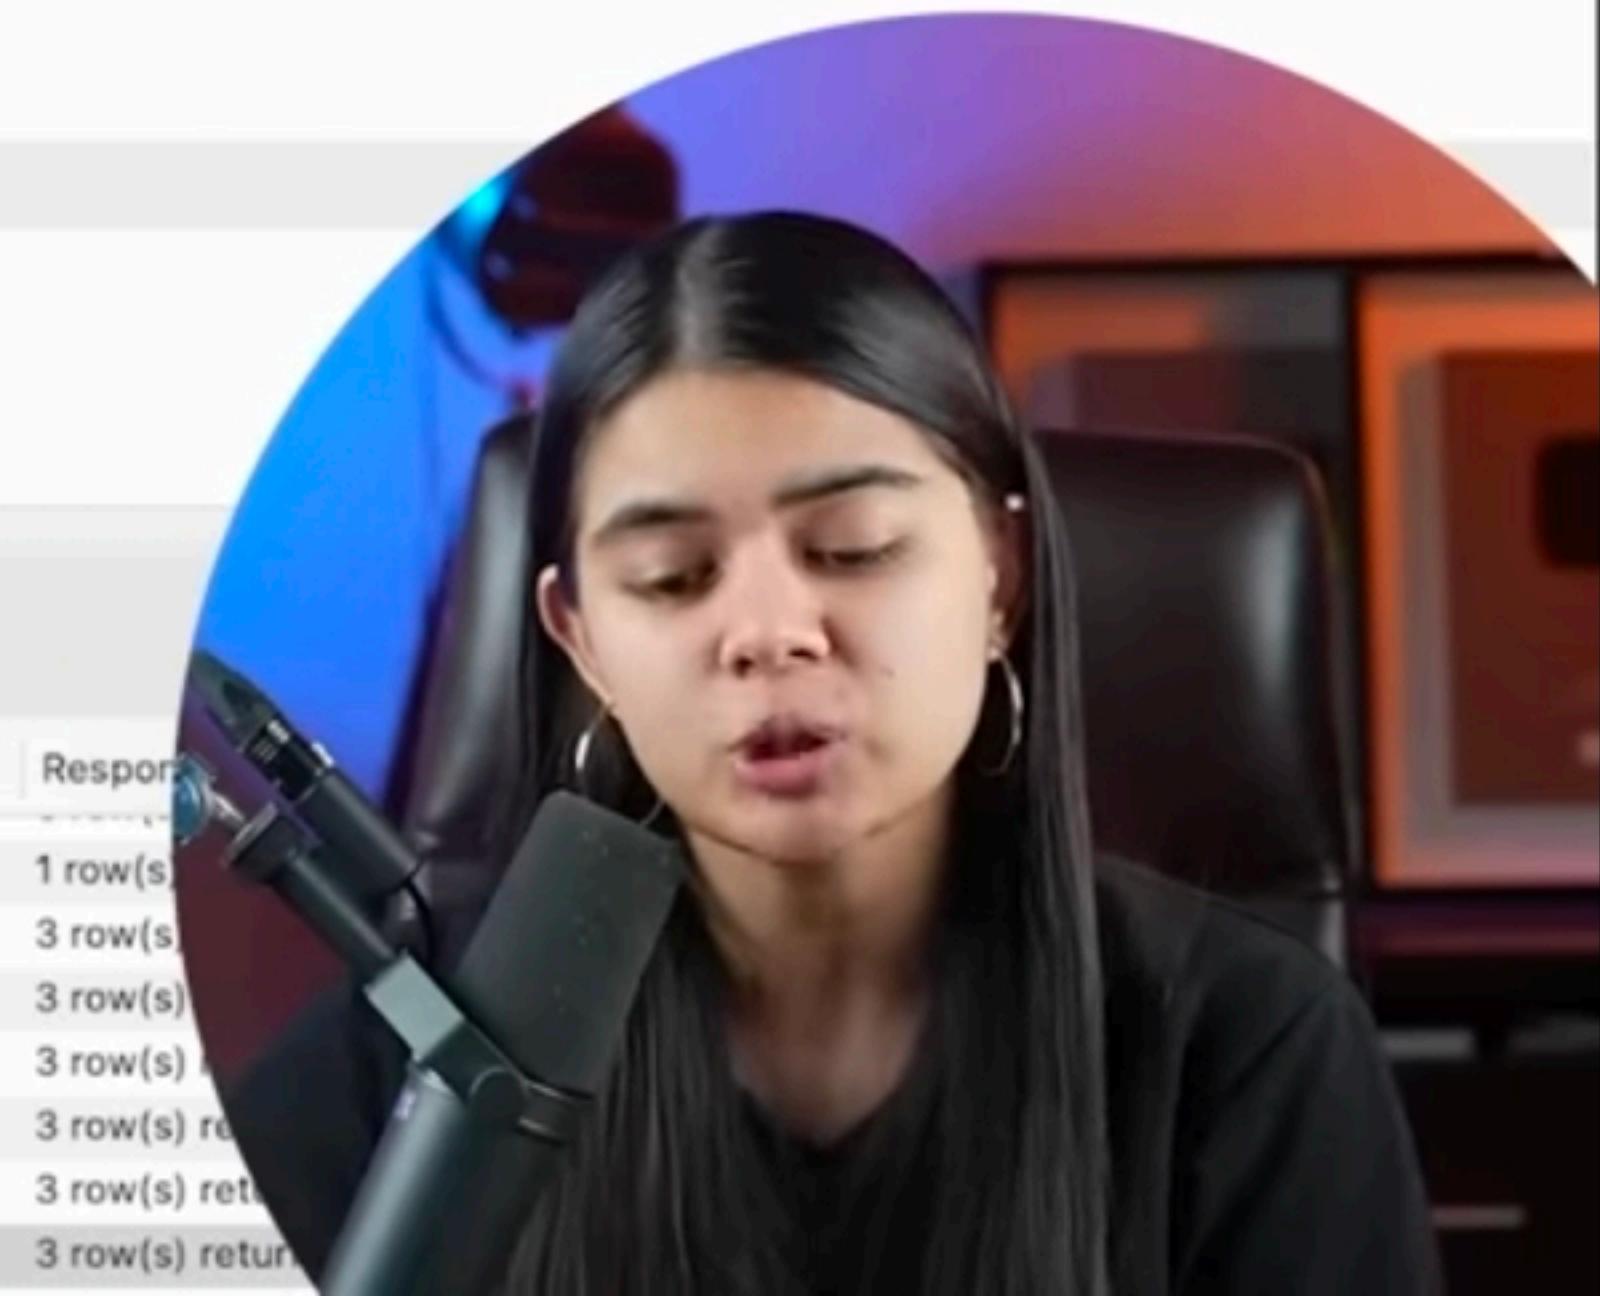

Administration Schemas classroom*

SCHEMAS

Filter objects

college

- Tables
- Views
- Stored Procedures
- Functions


sys

17 (103, "chetan", 85, "B", "Mumbai"),
18 (104, "dhruv", 96, "A", "Delhi"),
19 (105, "emanuel", 92, "F", "Delhi"),
20 (106, "farah", 82, "B", "Delhi);
21
22 • **SELECT * FROM student;**
23
24 • **SELECT rollno**
25 **FROM student**
26 **WHERE rollno % 2 = 0;**
27
28
29 • **SELECT name, rollno**
30 **FROM student**
31 **WHERE rollno IN (**
32 **SELECT rollno**
33 **FROM student**
34 **WHERE rollno % 2 = 0);**
35
36
37

130% 27:34

Action Output

Time	Action	Response
149 17:06:49	SELECT name FROM student WHERE marks > 87.6667 LIMIT 0, 1000	3 row(s)
150 17:07:03	SELECT name, marks FROM student WHERE marks > 87.6667 LIMIT 0, 1000	3 row(s)
151 17:09:11	SELECT name, marks FROM student WHERE marks > (SELECT AVG(marks) FROM student) LIMIT 0, 1000	3 row(s)
152 17:13:04	SELECT rollno FROM student WHERE rollno % 2 = 0 LIMIT 0, 1000	3 row(s)
153 17:13:59	SELECT name FROM student WHERE rollno IN (102, 104, 106) LIMIT 0, 1000	3 row(s) re
154 17:14:08	SELECT name, rollno FROM student WHERE rollno IN (102, 104, 106) LIMIT 0, 1000	3 row(s) ret
155 17:15:29	SELECT name, rollno FROM student WHERE rollno IN (SELECT rollno FROM student WHERE rollno % 2 = 0) LI...	3 row(s) retur

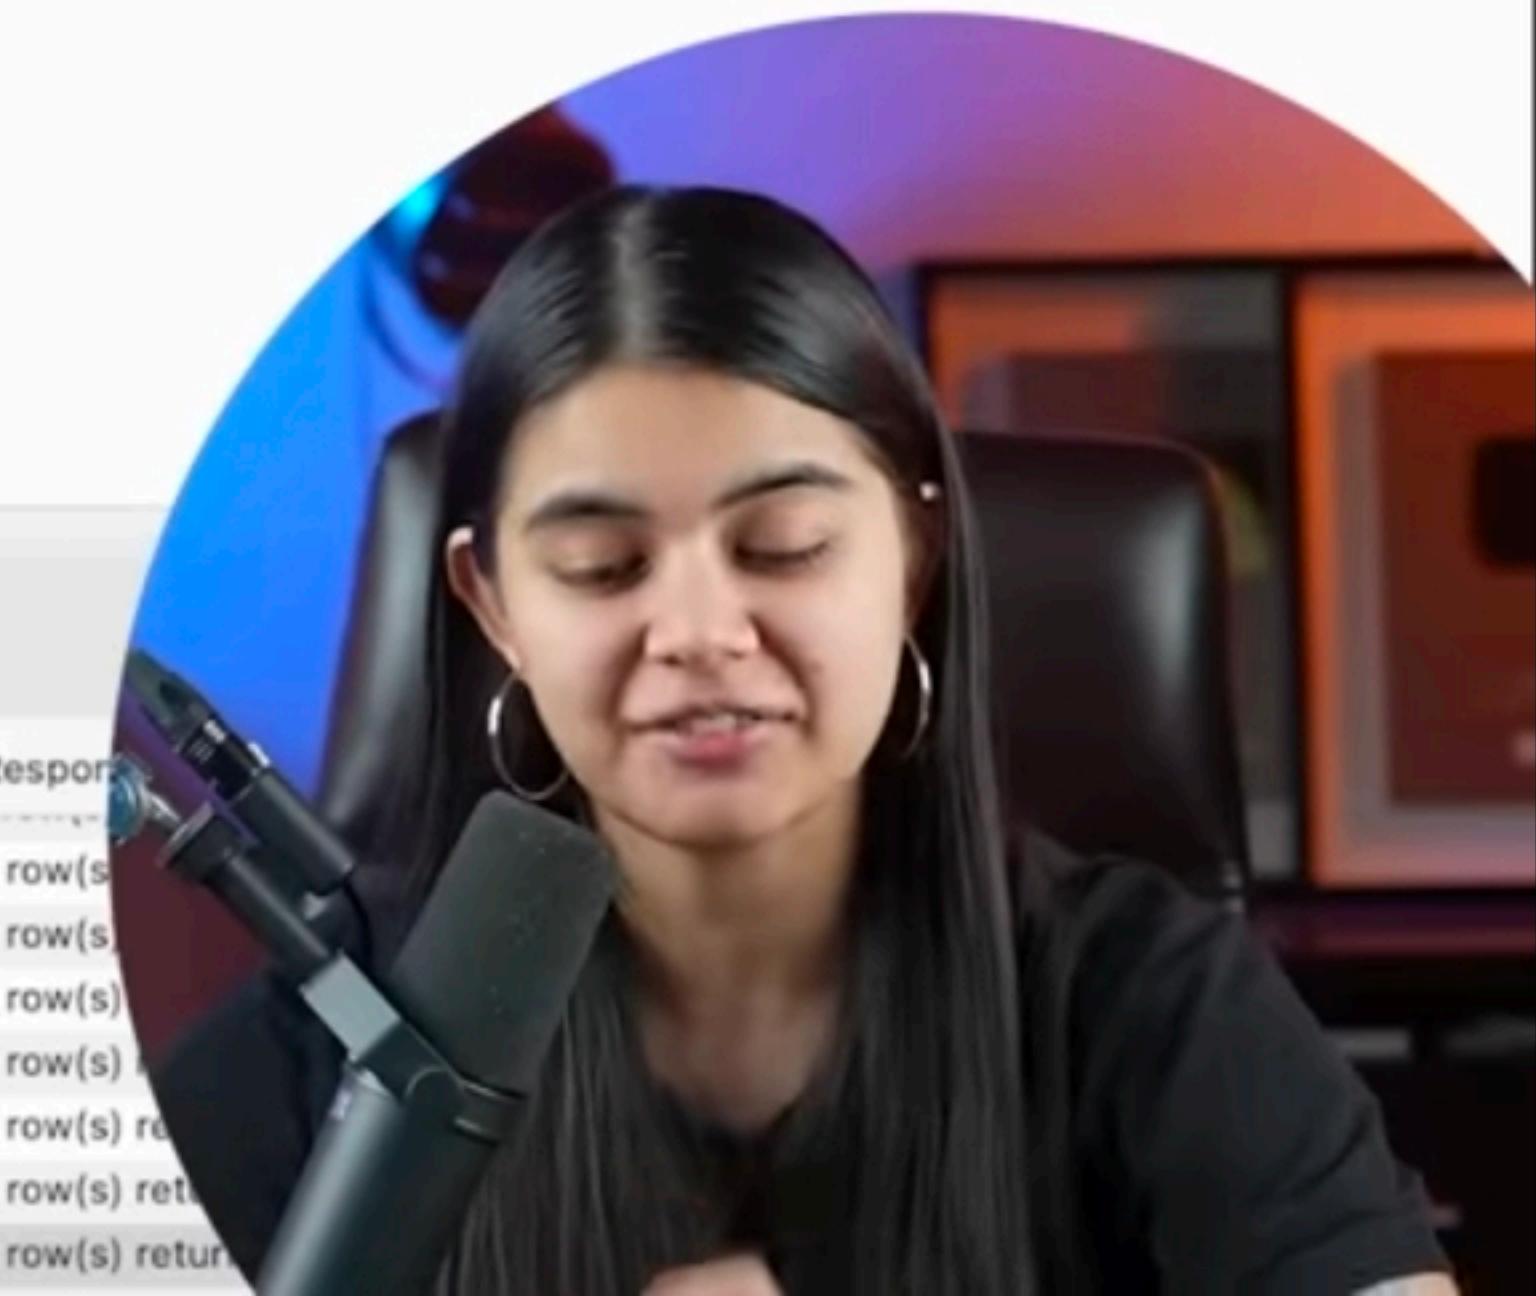

SQL Sub Queries

Example with FROM

Find the max marks from the students of Delhi

Step 1. Find the students of Delhi

Step 2. Find their max marks using the sublist in step 1

rollno	name	marks	city
101	anil	78	Pune
102	bhumika	93	Mumbai
103	chetan	85	Mumbai
104	dhruv	96	Delhi
105	emanuel	92	Delhi
106	farah	82	Delhi



Administration Schemas classroom*

SCHEMAS

Filter objects

college

- Tables
- Views
- Stored Procedures
- Functions


sys

8 grade VARCHAR(1),
9 city VARCHAR(20)
10);
11
12 • INSERT INTO student
13 (rollno, name, marks, grade, city)
14 VALUES
15 (101, "anil", 78, "C", "Pune"),
16 (102, "bhumika", 93, "A", "Mumbai"),
17 (103, "chetan", 85, "B", "Mumbai"),
18 (104, "dhruv", 96, "A", "Delhi"),
19 (105, "emanuel", 92, "F", "Delhi"),
20 (106, "farah", 82, "B", "Delhi);
21
22 • SELECT * FROM student;
23
24 • SELECT MAX(marks)
25 FROM (SELECT * FROM student WHERE city = "Mum") AS temp;
26
27
28

130% 46:25

Action Output

Time	Action	Response
152 17:13:04	SELECT rollno FROM student WHERE rollno % 2 = 0 LIMIT 0, 1000	3 row(s)
153 17:13:59	SELECT name FROM student WHERE rollno IN (102, 104, 106) LIMIT 0, 1000	3 row(s)
154 17:14:08	SELECT name, rollno FROM student WHERE rollno IN (102, 104, 106) LIMIT 0, 1000	3 row(s)
155 17:15:29	SELECT name, rollno FROM student WHERE rollno IN (SELECT rollno FROM student WHERE rollno % 2 = 0) LIMIT 0, 1000	3 row(s)
156 17:18:07	SELECT * FROM student WHERE city = "Delhi" LIMIT 0, 1000	3 row(s)
157 17:18:29	SELECT * FROM student WHERE city = "Delhi" LIMIT 0, 1000	3 row(s)
158 17:19:56	SELECT MAX(marks) FROM (SELECT * FROM student WHERE city = "Delhi") AS temp LIMIT 0, 1000	1 row(s) returned

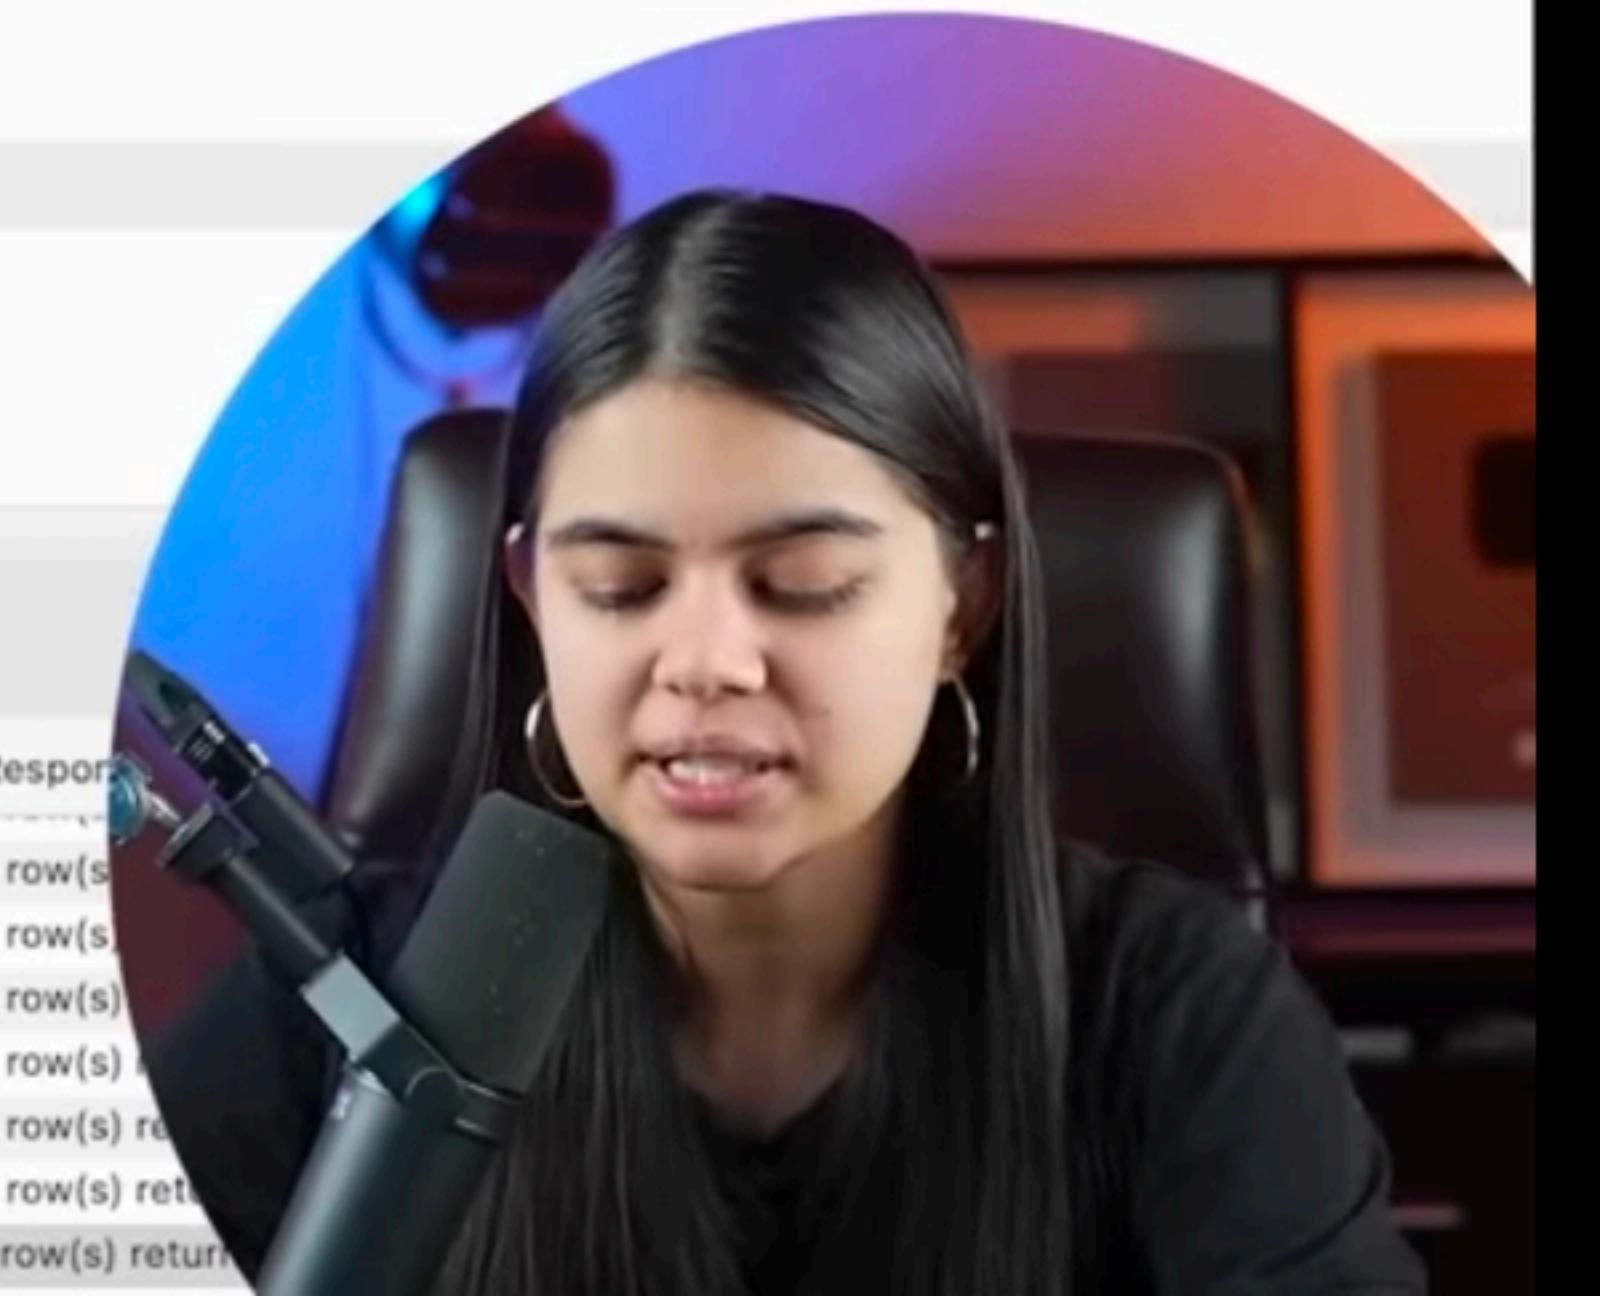

APNA
COLLEGE

Administration Schemas classroom*


SCHEMAS

Filter objects

college

- Tables
- Views
- Stored Procedures
- Functions

sys

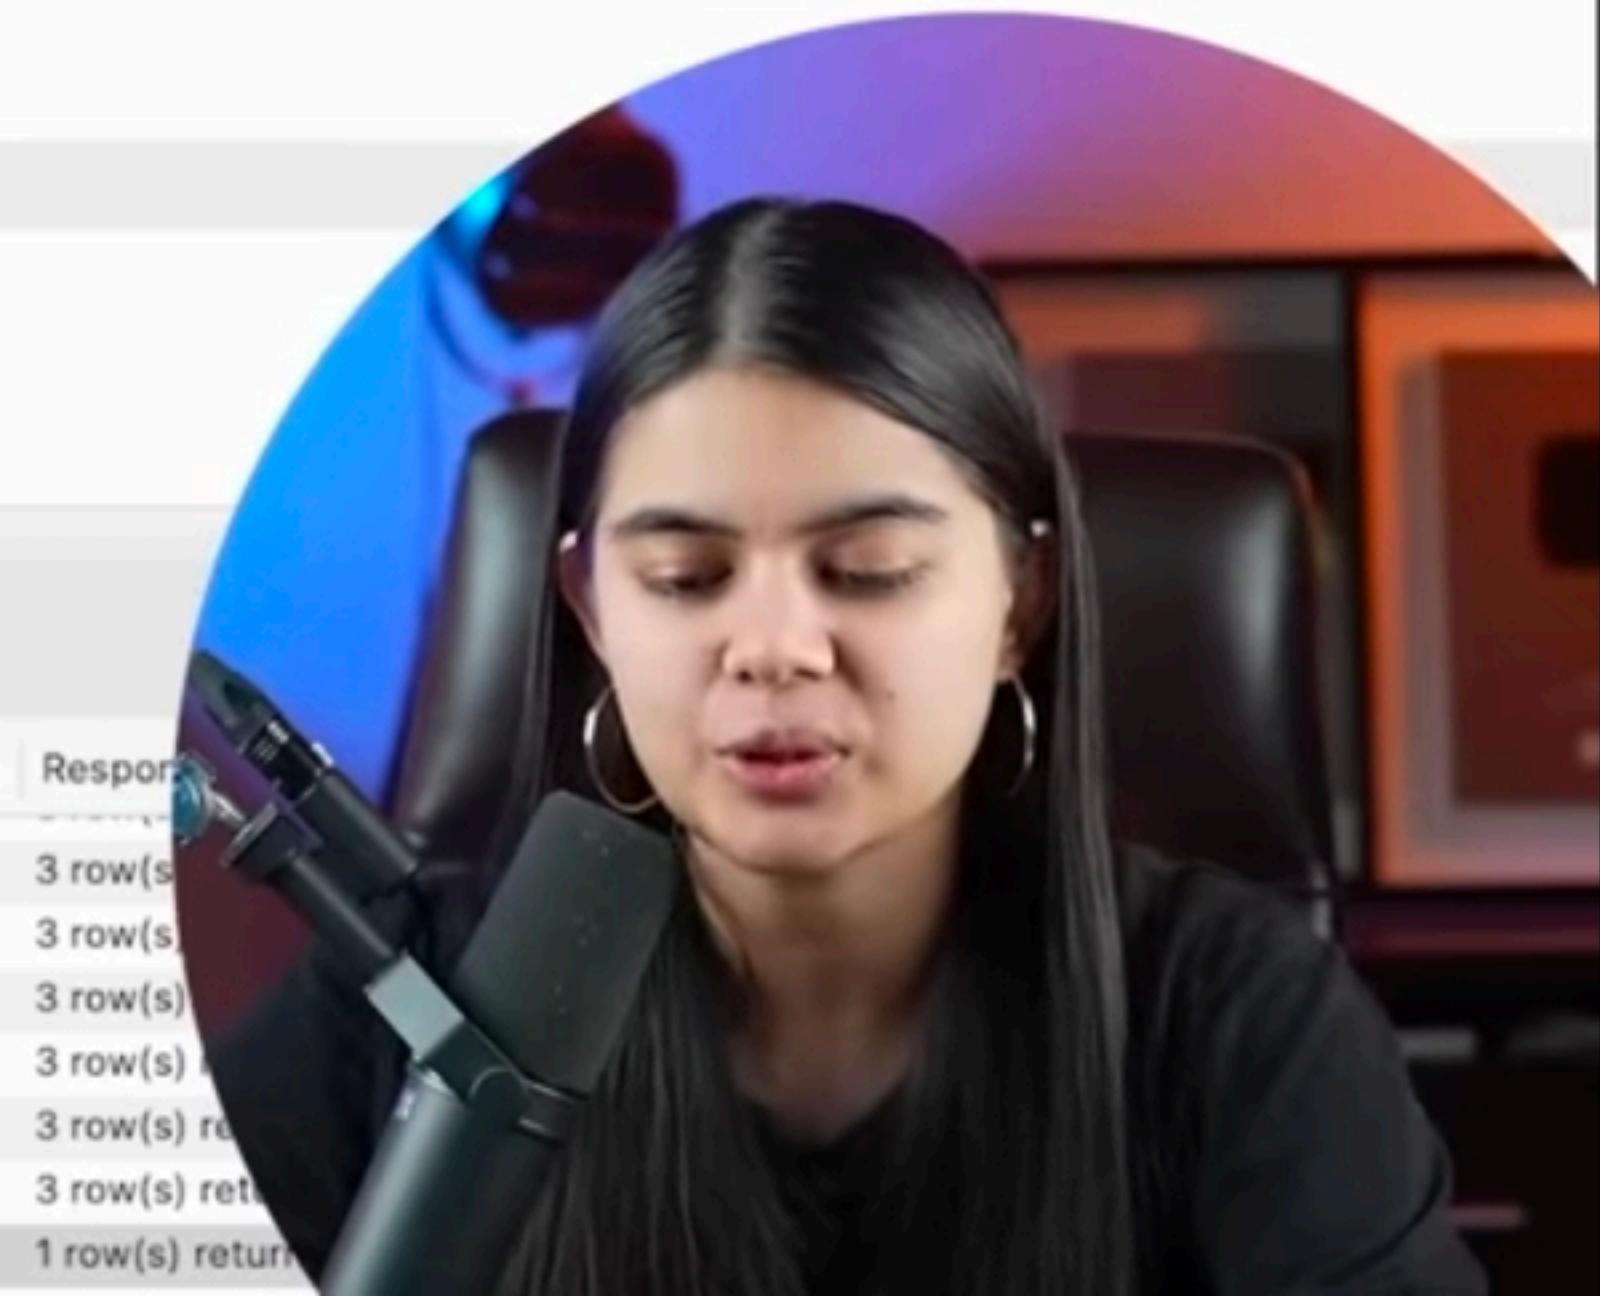8 grade VARCHAR(1),
9 city VARCHAR(20)
10);
11
12 • INSERT INTO student
13 (rollno, name, marks, grade, city)
14 VALUES
15 (101, "anil", 78, "C", "Pune"),
16 (102, "bhumika", 93, "A", "Mumbai"),
17 (103, "chetan", 85, "B", "Mumbai"),
18 (104, "dhruv", 96, "A", "Delhi"),
19 (105, "emanuel", 92, "F", "Delhi"),
20 (106, "farah", 82, "B", "Delhi);
21
22 • SELECT * FROM student;
23
24 • SELECT MAX(marks)
25 FROM (SELECT * FROM student WHERE city = "Mumbai") AS temp; 

130% 49:25

Action Output

Time	Action	Response
152 17:13:04	SELECT rollno FROM student WHERE rollno % 2 = 0 LIMIT 0, 1000	3 row(s)
153 17:13:59	SELECT name FROM student WHERE rollno IN (102, 104, 106) LIMIT 0, 1000	3 row(s)
154 17:14:08	SELECT name, rollno FROM student WHERE rollno IN (102, 104, 106) LIMIT 0, 1000	3 row(s)
155 17:15:29	SELECT name, rollno FROM student WHERE rollno IN (SELECT rollno FROM student WHERE rollno % 2 = 0) LIMIT 0, 1000	3 row(s)
156 17:18:07	SELECT * FROM student WHERE city = "Delhi" LIMIT 0, 1000	3 row(s)
157 17:18:29	SELECT * FROM student WHERE city = "Delhi" LIMIT 0, 1000	3 row(s)
158 17:19:56	SELECT MAX(marks) FROM (SELECT * FROM student WHERE city = "Delhi") AS temp LIMIT 0, 1000	1 row(s) returned

SQL Sub Queries

Example with SELECT



Administration Schemas classroom*

SCHEMAS Filter objects

college

- Tables
- Views
- Stored Procedures
- Functions


sys

11
12 • **INSERT INTO** student
13 (rollno, **name**, marks, grade, city)
14 **VALUES**
15 (101, "anil", 78, "C", "Pune"),
16 (102, "bhumika", 93, "A", "Mumbai"),
17 (103, "chetan", 85, "B", "Mumbai"),
18 (104, "dhruv", 96, "A", "Delhi"),
19 (105, "emanuel", 92, "F", "Delhi"),
20 (106, "farah", 82, "B", "Delhi");
21
22 • **SELECT * FROM** student;
23
24 • **SELECT (SELECT MAX(marks) FROM student), names**
25 **FROM student;**
26
27
28 • **SELECT MAX(marks)**
29 **FROM student**
30 **WHERE city = "Mumbai";**
31

130% 1:24

Action Output

Time	Action	Response
155 17:15:29	SELECT name, rollno FROM student WHERE rollno IN (SELECT rollno FROM student WHERE rollno % 2 = 0) LI...	3 row(s)
156 17:18:07	SELECT * FROM student WHERE city = "Delhi" LIMIT 0, 1000	3 row(s)
157 17:18:29	SELECT * FROM student WHERE city = "Delhi" LIMIT 0, 1000	3 row(s)
158 17:19:56	SELECT MAX(marks) FROM (SELECT * FROM student WHERE city = "Delhi") AS temp LIMIT 0, 1000	1 row(s)
159 17:20:15	SELECT MAX(marks) FROM (SELECT * FROM student WHERE city = "Mumbai") AS temp LIMIT 0, 1000	1 row(s)
160 17:20:43	SELECT MAX(marks) FROM student WHERE city = "Mumbai" LIMIT 0, 1000	1 row(s)
161 17:22:26	SELECT (SELECT MAX(marks) FROM student), names FROM student LIMIT 0, 1000	Error Code: 10

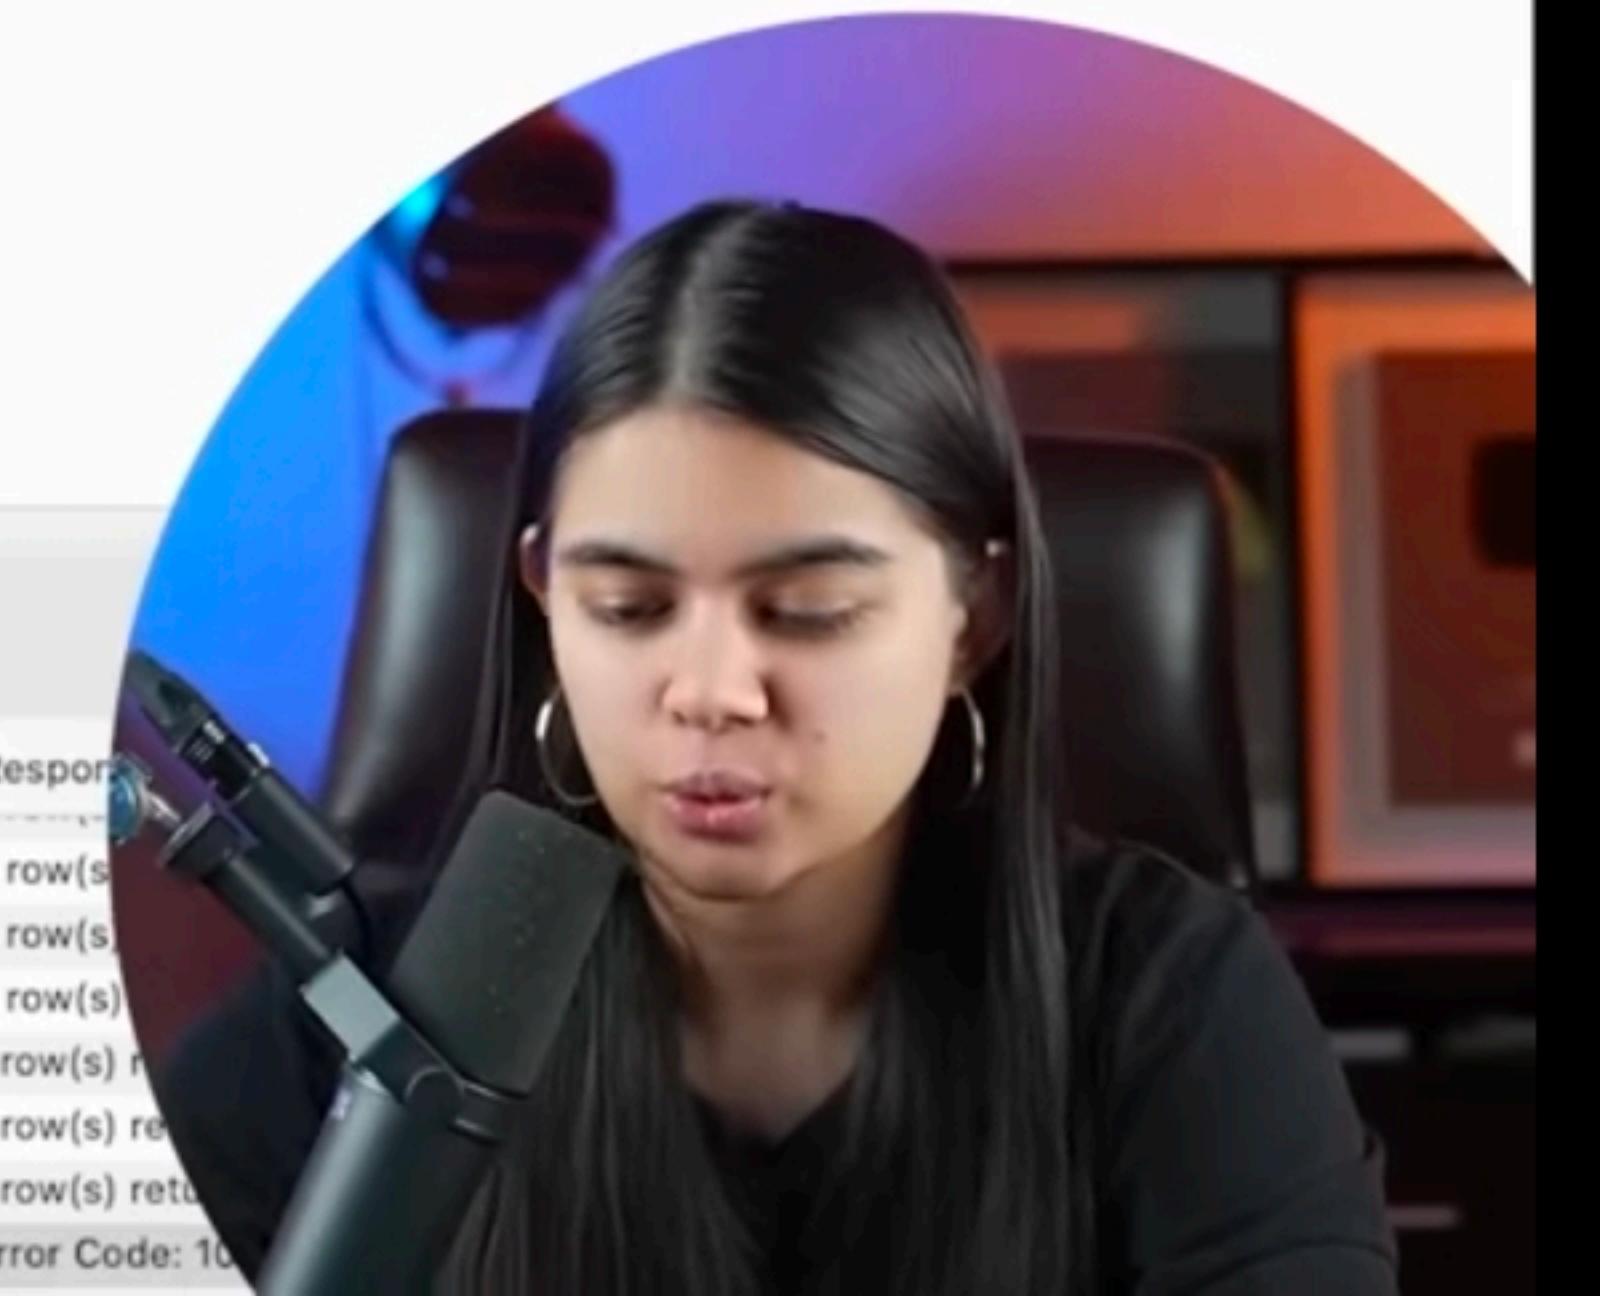

APNA
COLLEGE

MySQL Views

A view is a virtual table based on the result-set of an SQL statement.

```
CREATE VIEW view1 AS  
SELECT rollno, name FROM student;  
  
SELECT * FROM view1;
```

*A view always shows up-to-date data. The database engine recreates the view, every time a user queries it.



Administration Schemas classroom*

SCHEMAS Filter objects

- college
 - Tables
 - Views
 - Stored Procedures
 - Functions
- sys

Object Info Session


No object selected

```
10  );
11
12 • INSERT INTO student
13   (rollno, name, marks, grade, city)
14   VALUES
15   (101, "anil", 78, "C", "Pune"),
16   (102, "bhumika", 93, "A", "Mumbai"),
17   (103, "chetan", 85, "B", "Mumbai"),
18   (104, "dhruv", 96, "A", "Delhi"),
19   (105, "emanuel", 92, "F", "Delhi"),
20   (106, "farah", 82, "B", "Delhi);
21
22 • SELECT * FROM student;
23
24 • CREATE VIEW view1 AS
25   SELECT rollno, name, marks FROM student;
26
27 SE
28
29
30
```

130% 3:27

Action Output

Time	Action	Response
158 17:19:56	SELECT MAX(marks) FROM (SELECT * FROM student WHERE city = "Delhi") AS temp LIMIT 0, 1000	1 row(s)
159 17:20:15	SELECT MAX(marks) FROM (SELECT * FROM student WHERE city = "Mumbai") AS temp LIMIT 0, 1000	1 row(s)
160 17:20:43	SELECT MAX(marks) FROM student WHERE city = "Mumbai" LIMIT 0, 1000	1 row(s)
161 17:22:26	SELECT (SELECT MAX(marks) FROM student), names FROM student LIMIT 0, 1000	Error Code: 1054
162 17:22:34	SELECT (SELECT MAX(marks) FROM student), name FROM student LIMIT 0, 1000	6 row(s) re
163 17:22:59	SELECT (SELECT marks FROM student), name FROM student LIMIT 0, 1000	Error Code: 1054
164 17:27:11	CREATE VIEW view1 AS SELECT rollno, name, marks FROM student	0 row(s) affec

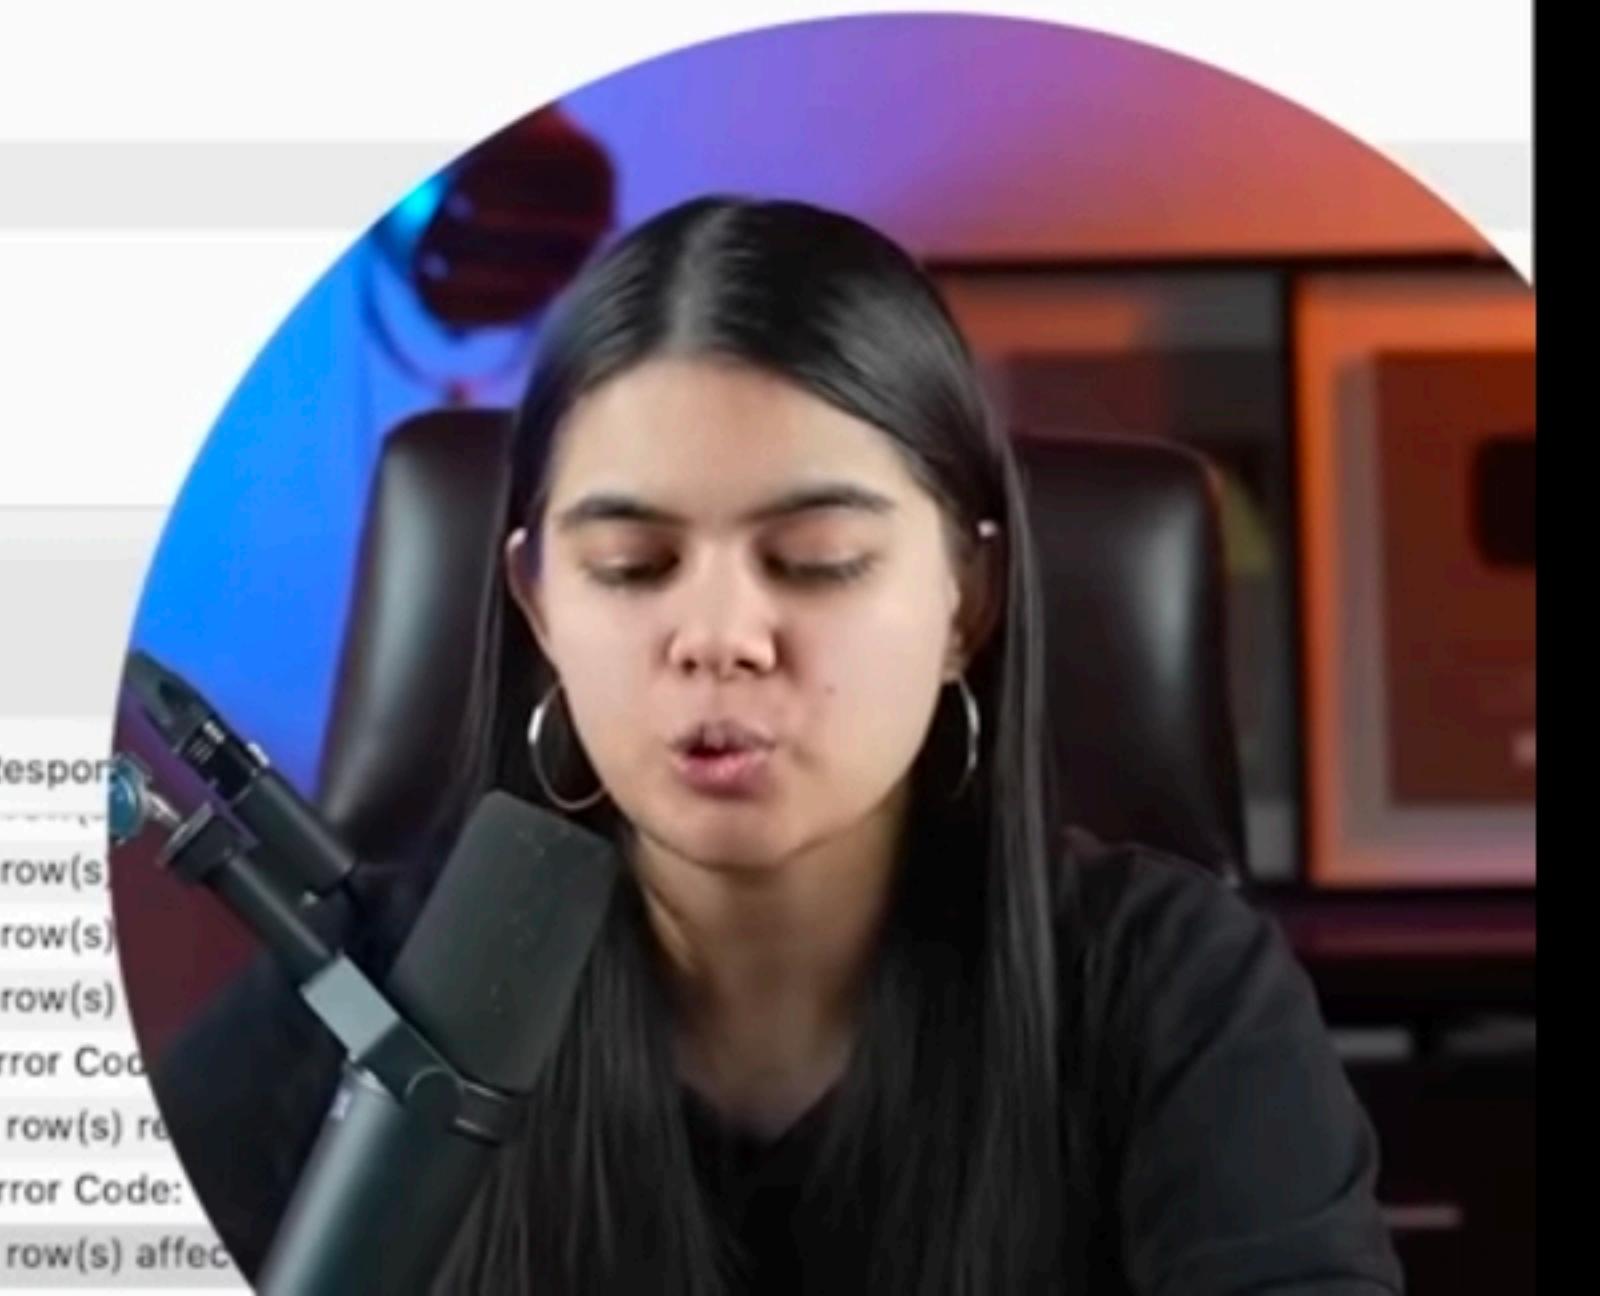

APNA
COLLEGE

Administration Schemas classroom*

SCHEMAS Filter objects

- college
 - Tables
 - Views
 - Stored Procedures
 - Functions
- sys

Object Info Session


No object selected

```
10  );
11
12 • INSERT INTO student
13   (rollno, name, marks, grade, city)
14   VALUES
15   (101, "anil", 78, "C", "Pune"),
16   (102, "bhumika", 93, "A", "Mumbai"),
17   (103, "chetan", 85, "B", "Mumbai"),
18   (104, "dhruv", 96, "A", "Delhi"),
19   (105, "emanuel", 92, "F", "Delhi"),
20   (106, "farah", 82, "B", "Delhi);
21
22 • SELECT * FROM student;
23
24 • CREATE VIEW view1 AS
25   SELECT rollno, name, marks FROM student;
26
27 • SELECT * FROM view1;
28
29
30
```

130% 1:27

Action Output

Time	Action	Response
158 17:19:56	SELECT MAX(marks) FROM (SELECT * FROM student WHERE city = "Delhi") AS temp LIMIT 0, 1000	1 row(s)
159 17:20:15	SELECT MAX(marks) FROM (SELECT * FROM student WHERE city = "Mumbai") AS temp LIMIT 0, 1000	1 row(s)
160 17:20:43	SELECT MAX(marks) FROM student WHERE city = "Mumbai" LIMIT 0, 1000	1 row(s)
161 17:22:26	SELECT (SELECT MAX(marks) FROM student), names FROM student LIMIT 0, 1000	Error Code: 1054
162 17:22:34	SELECT (SELECT MAX(marks) FROM student), name FROM student LIMIT 0, 1000	6 row(s) re
163 17:22:59	SELECT (SELECT marks FROM student), name FROM student LIMIT 0, 1000	Error Code: 1054
164 17:27:11	CREATE VIEW view1 AS SELECT rollno, name, marks FROM student	0 row(s) affec

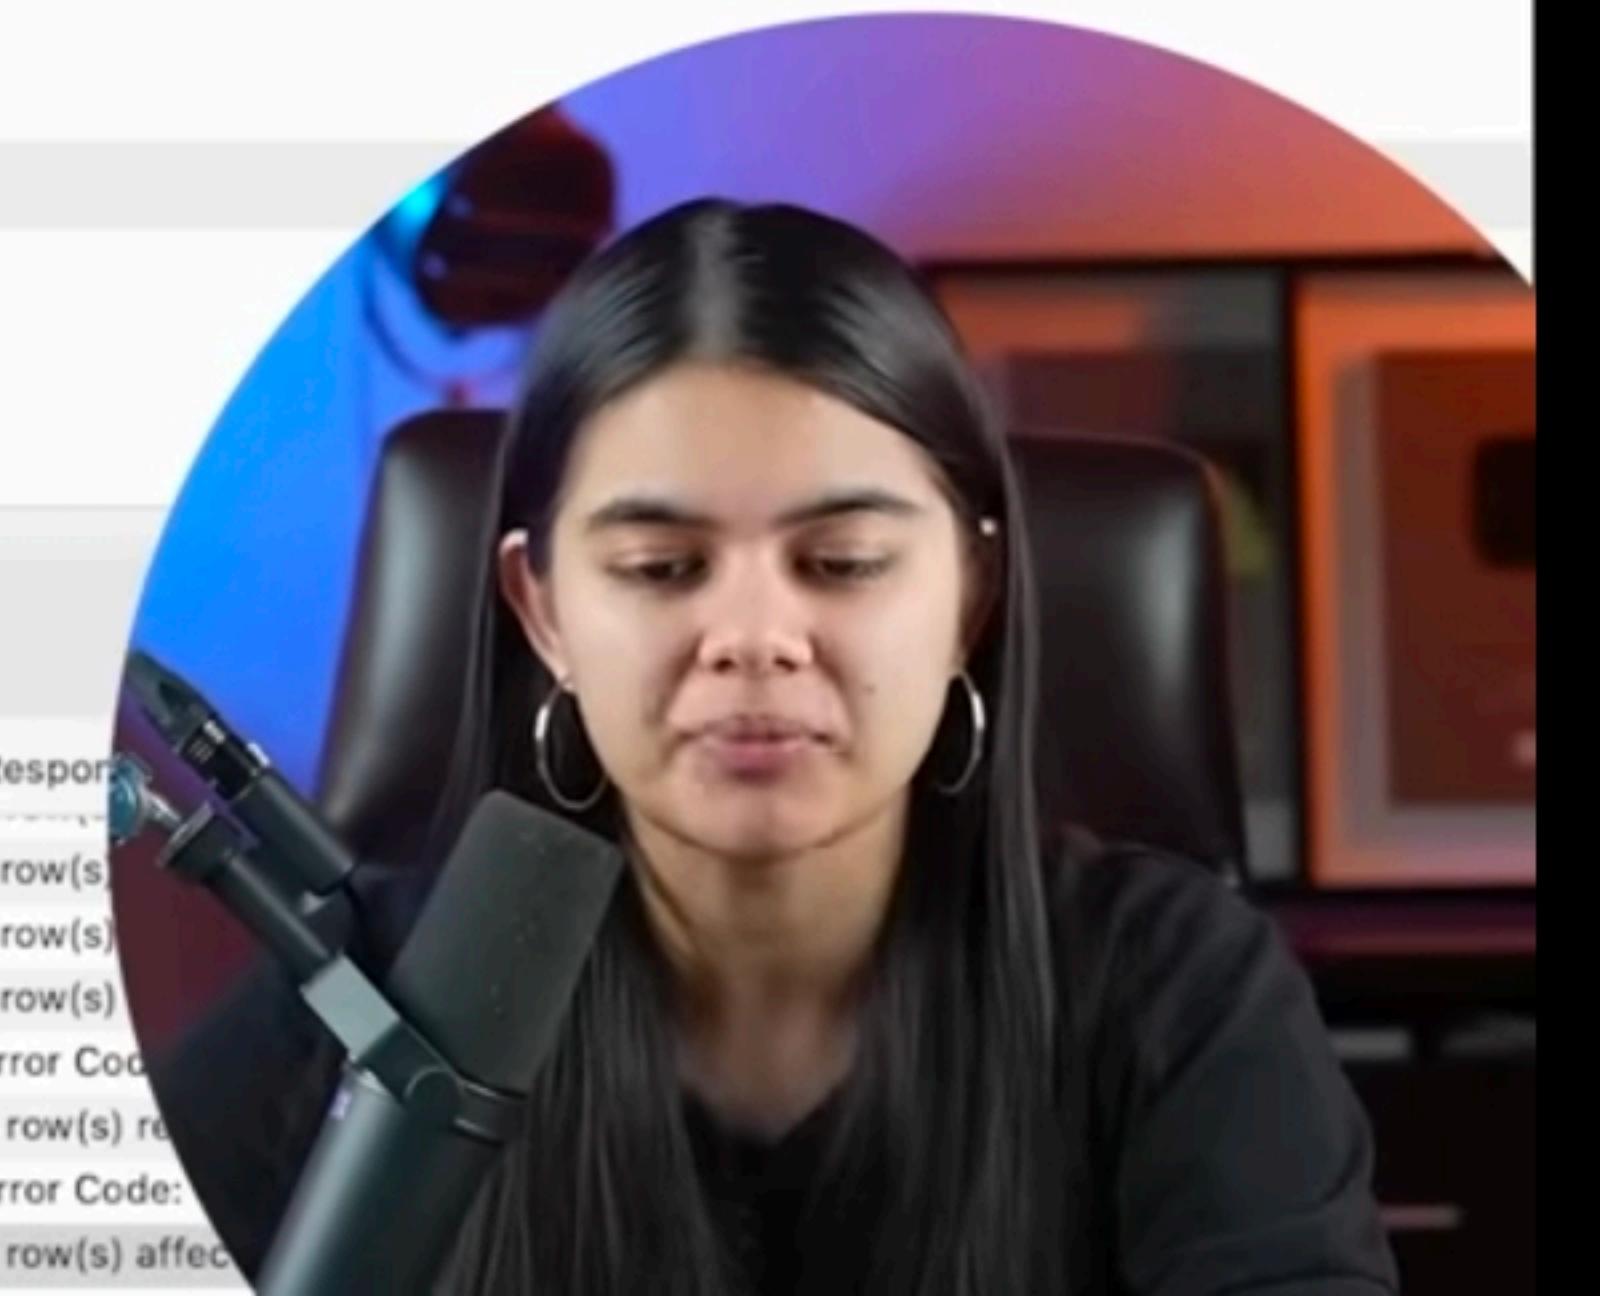

Administration Schemas classroom*

EMAS Filter objects

college

- Tables
- Views
- Stored Procedures
- Functions


sys

```
10  );
11
12 • INSERT INTO student
13   (rollno, name, marks, grade, city)
14   VALUES
15   (101, "anil", 78, "C", "Pune"),
16   (102, "bhumika", 93, "A", "Mumbai"),
17   (103, "chetan", 85, "B", "Mumbai"),
18   (104, "dhruv", 96, "A", "Delhi"),
19   (105, "emanuel", 92, "F", "Delhi"),
20   (106, "farah", 82, "B", "Delhi);
21
22 • SELECT * FROM student;
23
24 • CREATE VIEW view1 AS
25   SELECT rollno, name, marks FROM student;
26
27
28
29
30
```

130% 1:27

Action Output

	Time	Action
✖	161 17:22:26	SELECT (SELECT MAX(marks) FROM student), names FROM student LIMIT 0, 1000
✓	162 17:22:34	SELECT (SELECT MAX(marks) FROM student), name FROM student LIMIT 0, 1000
✖	163 17:22:59	SELECT (SELECT marks FROM student), name FROM student LIMIT 0, 1000
✓	164 17:27:11	CREATE VIEW view1 AS SELECT rollno, name, marks FROM student
✓	165 17:27:24	SELECT * FROM view1 LIMIT 0, 1000

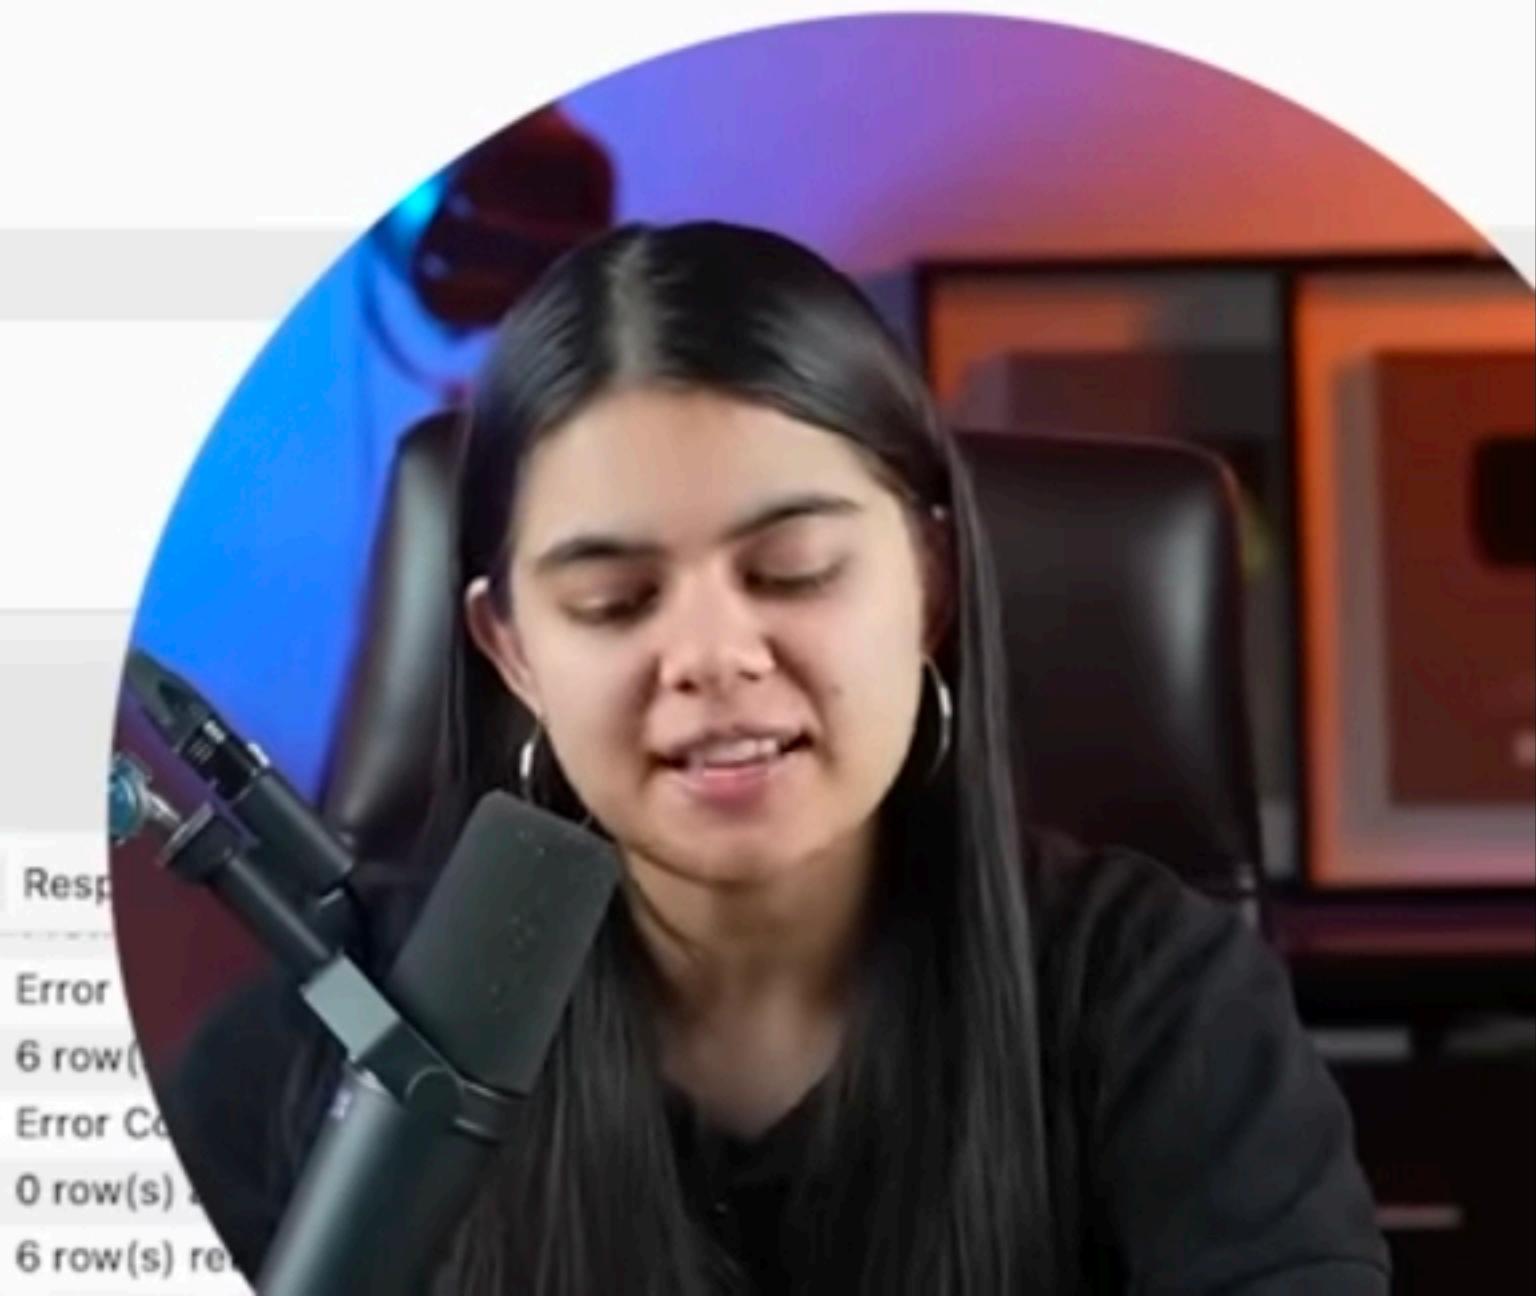

ministration Schemas classroom*

EMAS Filter objects

college

- Tables
- Views
- Stored Procedures
- Functions

sys

```
10  );
11
12 • INSERT INTO student
13   (rollno, name, marks, grade, city)
14   VALUES
15   (101, "anil", 78, "C", "Pune"),
16   (102, "bhumika", 93, "A", "Mumbai"),
17   (103, "chetan", 85, "B", "Mumbai"),
18   (104, "dhruv", 96, "A", "Delhi"),
19   (105, "emanuel", 92, "F", "Delhi"),
20   (106, "farah", 82, "B", "Delhi");
21
22 • SELECT * FROM student;
23
24 • CREATE VIEW view1 AS
25   SELECT rollno, name, marks FROM student;
26
27 • DROP VIEW view1;
28
29
30
```

130% 2:27

Action Output

	Time	Action	Response
161	17:22:26	SELECT (SELECT MAX(marks) FROM student), names FROM student LIMIT 0, 1000	Error
162	17:22:34	SELECT (SELECT MAX(marks) FROM student), name FROM student LIMIT 0, 1000	6 row(s)
163	17:22:59	SELECT (SELECT marks FROM student), name FROM student LIMIT 0, 1000	Error
164	17:27:11	CREATE VIEW view1 AS SELECT rollno, name, marks FROM student	0 row(s)
165	17:27:24	SELECT * FROM view1 LIMIT 0, 1000	6 row(s) re

