

Question 1

Not yet answered

Marked out of 1.00

Flag question

In the groups are not predefined

- ☐ a. prediction
- ☒ b. clustering
- ☐ c. summarization
- ☐ d. association rules

Question 2

Not yet answered

Marked out of 1.00

Flag question

Clustering algorithm which can find clusters of spherical shape are

- ☒ a. K-mean
- ☐ b. DBSCAN
- ☐ c. KNN
- ☐ d. Agglomerative

Question 3

Not yet answered

Marked out of 1.00

Flag question

To measure objects similarity for objects with nominal attributes, use Euclidean distance

- ☒ a. FALSE
- ☐ b. TRUE

Question 4

Not yet answered

Marked out of 1.00

Flag question

If a person's height is measured in inches, then what kind of attribute will you use?

- ☐ a. Nominal.
- ☒ b. Ratio scaled.
- ☐ c. Interval scaled.
- ☐ d. Discrete.

Question 5

Not yet answered

Marked out of 1.00

Flag question

Which statement about outliers is true?

- ☐ a. It should be part of the training dataset but should not be present in the test data.
- ☐ b. It should be identified and removed from a dataset.
- ☐ c. It should be part of the test dataset but should not be present in the training data.
- ☒ d. The nature of the problem determines how outliers are used

Question 6

Not yet answered

Marked out of 1.00

Flag question

if the confidence of the rule > the min-confidence this means the rules is

- ☒ a. strong
- ☐ b. good
- ☐ c. frequent
- ☐ d. correlated

Question 7

Not yet answered

Marked out of 1.00

Flag question

What does the term 'outlier' mean?

- ☐ a. The arithmetic mean
- ☐ b. A type of variable that cannot be quantified
- ☒ c. An extreme value at either end of a distribution
- ☐ d. A score that is left out of the analysis because of missing data

Question 8

Not yet answered

Marked out of 1.00

Flag question

What does the term 'outlier' mean?

- ☒ a. An extreme value at either end of a distribution
- ☐ b. The arithmetic mean
- ☐ c. A score that is left out of the analysis because of missing data
- ☐ d. A type of variable that cannot be quantified

Quiz navigation

1	2	3	4	5	6	7	8
9	10						

Finish attempt ...

Question 9

Not yet
answered

Marked out of
1.00

Flag question

Binary variables are sometimes continuous

- ☐ a. TRUE
- ☒ b. FALSE

Question 10

Not yet
answered

Marked out of
1.00

Flag question

Task of inferring a model from labelled training data is called.....

- ☒ a. Classification
- ☐ b. Association rule
- ☐ c. Cluster analysis
- ☐ d. Transformation

FINISH ATTEMPT ...

جميع الحقوق محفوظة © 2023 مركز تقنية الاتصالات والمعلومات -التعليم الإلكتروني - جامعة المنصورة

Data retention summary
Get the mobile app

Question 1

Not yet answered

Marked out of 1.00

Flag question

Reducing the number of attributes to solve the high dimensionality problem is called as

- ☐ a. Overfitting
- ☐ b. Cleaning
- ☐ c. Dimensionality
- ☒ d. Dimensionality reduction

Question 2

Not yet answered

Marked out of 1.00

Flag question

Intrinsic methods measure how well the clusters are separated

- ☐ a. FALSE
- ☒ b. TRUE

Question 3

Not yet answered

Marked out of 1.00

Flag question

Which statement is true about the K-Means algorithm?

- ☒ a. All attributes must be numeric.
- ☐ b. All attribute values must be categorical.
- ☐ c. The output attribute must be categorical.
- ☐ d. Attribute values may be either categorical or numeric.

Question 4

Not yet answered

Marked out of 1.00

Flag question

Is a way to model a relationship between two sets of variables as an equation?

- ☐ a. Clustering
- ☐ b. Classification
- ☒ c. Regression
- ☐ d. Association rule

Question 5

Not yet answered

Marked out of 1.00

Flag question

Sensitivity is.....

- ☐ a. TN/N
- ☒ b. TP/P
- ☐ c. $FP+FN/P+N$
- ☐ d. $TP+TN/P+N$

Question 6

Not yet answered

Marked out of 1.00

Flag question

Nonparametric data reduction strategies include all the following except.....

- ☐ a. Sampling
- ☒ b. Regression
- ☐ c. Histograms
- ☐ d. Clustering

Question 7

Not yet answered

Marked out of 1.00

Flag question

In the decision tree induction, you will choose the attribute with information gain to be a split attribute.

- ☒ a. large
- ☐ b. positive
- ☐ c. negative
- ☐ d. small

Question 8

Not yet answered

Marked out of 1.00

Flag question

Which of the following is required by K-means clustering?

- ☐ a. initial guess as to cluster centroids
- ☐ b. number of clusters
- ☒ c. all of them
- ☐ d. defined distance metric

Quiz navigation

1	2	3	4	5	6	7	8
9	10						

Finish attempt ...

Question 9

Not yet
answered

Marked out of
1.00

Flag question

Concept Hierarchy is used to

- ☐ a. data cleaning
- ☐ b. data reduction
- ☒ c. Data discretization
- ☐ d. data integration

Question 10

Not yet
answered

Marked out of
1.00

Flag question

The goal of clustering analysis is to maximize the number of clusters

- ☐ a. TRUE
- ☒ b. FALSE

FINISH ATTEMPT ...

جميع الحقوق محفوظة © 2023 مركز تقنية الاتصالات والمعلومات -التعليم الإلكتروني - جامعة المنصورة

Data retention summary
Get the mobile app

Question 9

Not yet
answered

Marked out of
1.00

Flag question

The problem that related to calculate the mean is

- ☐ a. noise
- ☐ b. missing data
- ☐ c. time consuming
- ☒ d. sensitivity to outlier

Question 10

Not yet
answered

Marked out of
1.00

Flag question

Incomplete data problem can be solved by binning

- ☐ a. TRUE
- ☒ b. FALSE

FINISH ATTEMPT ...

جميع الحقوق محفوظة © 2023 مركز تقنية الاتصالات والمعلومات -التعليم الإلكتروني - جامعة المنصورة

Data retention summary
Get the mobile app

Question 1

Not yet answered

Marked out of 1.00

Flag question

..... is the process of finding a model that describes and distinguishes data classes.

- ☐ a. Data selection
- ☐ b. Data Characterization
- ☐ c. Data discrimination
- ☒ d. Data Classification

Question 2

Not yet answered

Marked out of 1.00

Flag question

Outliers clusters

- ☐ a. belong to small cluster
- ☐ b. do not belong to any
- ☒ c. all of them
- ☐ d. belong to sparse

Question 3

Not yet answered

Marked out of 1.00

Flag question

Attributes are sometimes called variables and objects are sometimes called observations

- ☐ a. TRUE
- ☒ b. FALSE

Question 4

Not yet answered

Marked out of 1.00

Flag question

if K-mean finds Clusters with very different sizes and with concave shapes this mean.....

- ☐ a. it find good clusters
- ☒ b. it fails
- ☐ c. none of them
- ☐ d. it needs more time

Question 5

Not yet answered

Marked out of 1.00

Flag question

The K-Means algorithm terminates when.....

- ☒ a. the cluster centers for the current iteration are identical to the cluster centers for the previous iteration.
- ☐ b. the number of instances in each cluster for the current iteration is identical to the number of instances in each cluster of the previous iteration.
- ☐ c. the number of clusters formed for the current iteration is identical to the number of clusters formed in the previous iteration.
- ☐ d. a user-defined minimum value for the summation of squared error differences between instances and their corresponding cluster center is seen.

Question 6

Not yet answered

Marked out of 1.00

Flag question

In lazy learner we interest in the distance

- ☐ a. Equal
- ☐ b. different
- ☐ c. Largest
- ☒ d. Smallest

Question 7

Not yet answered

Marked out of 1.00

Flag question

If the mean = median the data is

- ☒ a. symmetric
- ☐ b. negatively skewed
- ☐ c. positively skewed
- ☐ d. correlated

Question 8

Not yet answered

Marked out of 1.00

Flag question

Which of the following clustering requires merging approach?

- ☐ a. Partitional
- ☐ b. Density-based
- ☐ c. Grid-based

Quiz navigation

1	2	3	4	5	6	7	8
9	10						

Finish attempt ...

☒ d. Hierarchical

Question 9

Not yet
answered

Marked out of
1.00

Flag question

Sampling methods smooth noisy data

- ☒ a. FALSE
☐ b. TRUE

Question 10

Not yet
answered

Marked out of
1.00

Flag question

Selecting data so as to assure that each class is properly represented in both the training and test set.

- ☐ a. bootstrapping
☒ b. stratification
☐ c. verification
☐ d. cross validation

FINISH ATTEMPT ...

جميع الحقوق محفوظة © 2023 مركز تقنية الاتصالات والمعلومات -التعليم الإلكتروني - جامعة المنصورة

Data retention summary
Get the mobile app

Question 1

Not yet answered

Marked out of 1.00

[Flag question](#)

Which of the following is the process of detecting and correcting the wrong data?

- ☐ a. Data integration
- ☐ b. Data transformation
- ☒ c. data cleaning
- ☐ d. data selection

Question 2

Not yet answered

Marked out of 1.00

[Flag question](#)

One strength of a Bayesian Classifier is that it can be easily trained

- ☐ a. FALSE
- ☒ b. TRUE

Question 3

Not yet answered

Marked out of 1.00

[Flag question](#)

Mode is found in the numeric attribute values only.

- ☐ a. TRUE
- ☒ b. FALSE

Question 4

Not yet answered

Marked out of 1.00

[Flag question](#)

..... methods evaluate clustering by comparing clustering against ground truth

- ☐ a. silhouette coefficient
- ☒ b. Extrinsic
- ☐ c. None of them
- ☐ d. Intrinsic

Question 5

Not yet answered

Marked out of 1.00

[Flag question](#)

..... is the result of a tuple firing more than one rule with different class predictions.

- ☐ a. Interested rule
- ☒ b. Rule conflict
- ☐ c. Strong rule
- ☐ d. Association rule

Question 6

Not yet answered

Marked out of 1.00

[Flag question](#)

The patterns that can be discovered from a given database can be of.....

- ☐ a. multiple type always
- ☒ b. more than one type
- ☐ c. one type only
- ☐ d. no specific type

Question 7

Not yet answered

Marked out of 1.00

[Flag question](#)

If any of the proper subsets of an itemset are not frequent, then the itemset itself.....

- ☐ a. is weak
- ☒ b. must be infrequent
- ☐ c. may be frequent
- ☐ d. must also be frequent

Question 8

Not yet answered

Marked out of 1.00

[Flag question](#)

If you want to give all attributes an equal weight, which pre-process task will you use

- ☐ a. Reduction
- ☐ b. Integration
- ☒ c. Transformation
- ☐ d. Cleaning

1	2	3	4	5	6	7	8
9	10						

Finish attempt ...

Question 9

Not yet
answered

Marked out of
1.00

Flag question

The probability that two items are bought together is known as _____ .

- ☐ a. confidence
- ☐ b. Correlation
- ☒ c. support
- ☐ d. lift

Question 10

Not yet
answered

Marked out of
1.00

Flag question

Clustering algorithms which can find clusters of arbitrary shape

- ☐ a. Agglomerative
- ☐ b. Divisive
- ☒ c. DBSCAN
- ☐ d. K-means

FINISH ATTEMPT ...

Question 1

Not yet answered

Marked out of 1.00

Flag question

Sorting a student database based on student identification numbers is a data mining task.

- ☐ a. TRUE
- ☒ b. FALSE

Question 2

Not yet answered

Marked out of 1.00

Flag question

In decision tree algorithms, attribute selection measures are used to rank attributes

- ☐ a. FALSE
- ☒ b. TRUE

Question 3

Not yet answered

Marked out of 1.00

Flag question

an object p is directly from another object q if and only if q is a core object and p is in the ϵ -neighborhood of q

- ☐ a. come
- ☐ b. exclude
- ☐ c. density-connected
- ☒ d. density-reachable

Question 4

Not yet answered

Marked out of 1.00

Flag question

Data mining is best described as the process of.....

- ☒ a. identifying patterns in data.
- ☐ b. deducing relationships in data.
- ☐ c. representing data.
- ☐ d. simulating trends in data.

Question 5

Not yet answered

Marked out of 1.00

Flag question

The support for the association rule {bread} $\rightarrow$ {milk} was determined to be 0.95. What does the value 0.95 mean?

- ☐ a. 95% of customers who buy bread don't buy milk
- ☒ b. 95% of customers buy bread and milk
- ☐ c. 95% of customers who buy bread buy also milk
- ☐ d. 95% of customers who buy milk buy also bread

Question 6

Not yet answered

Marked out of 1.00

Flag question

This clustering algorithm initially assumes that each data instance represents a single cluster.

- ☐ a. expectation maximization
- ☒ b. agglomerative clustering
- ☐ c. K-Means clustering
- ☐ d. conceptual clustering

Question 7

Not yet answered

Marked out of 1.00

Flag question

The bottleneck of the Apriori algorithm is caused by

- ☐ a. No. of rule
- ☐ b. Min. confidence
- ☒ c. No. of candidate
- ☐ d. Correlation

Question 8

Not yet answered

Marked out of 1.00

Flag question

If the lift measure of the items bred and rice is equal to 1.0 this means bred and rice are ...

- ☐ a. equal
- ☐ b. positive correlated
- ☒ c. independent
- ☐ d. negative correlated

Quiz navigation

1	2	3	4	5	6	7	8
9	10						

Finish attempt ...

Question 9

Not yet
answered

Marked out of
1.00

Flag question

Error rate is

- ☒ a. $FP+FN/P+N$
- ☐ b. TP/P
- ☐ c. TN/N
- ☐ d. $TP+TN/P+N$

Question 10

Not yet
answered

Marked out of
1.00

Flag question

Accuracy is.....

- ☐ a. TN/N
- ☒ b. $TP+TN/P+N$
- ☐ c. $FP+FN/P+N$
- ☐ d. TP/P

FINISH ATTEMPT ...

جميع الحقوق محفوظة © 2023 مركز تقنية الاتصالات والمعلومات -التعليم الإلكتروني - جامعة المنصورة

Data retention summary
Get the mobile app

Question 1

Not yet answered

Marked out of 1.00

Flag question

If the information gain of age, income, department and job attributes are 0.24, 0.204, 0.32 and 0.023 respectively which one you will choose as the splitting attribute

- ☐ a. age

☐ b. job

☐ c. income

☒ d. department
- اختار أكبر قيمة

Question 2

Not yet answered

Marked out of 1.00

Flag question

k-means algorithm is used for classification

- ☒ a. FALSE

☐ b. TRUE

Question 3

Not yet answered

Marked out of 1.00

Flag question

..... replaces original data volume by smaller data representation

- ☐ a. Dimensionality reduction

☐ b. Compression

☒ c. Numerosity reduction

☐ d. Transformation

Question 4

Not yet answered

Marked out of 1.00

Flag question

..... is the correlation analysis measure for nominal attribute.

- ☐ a. lift

☐ b. Covariance

☐ c. Correlation Coefficient

☒ d. chi-square

Question 5

Not yet answered

Marked out of 1.00

Flag question

Mode is a middle value in set of ordered values

- ☒ a. FALSE

☐ b. TRUE

Question 6

Not yet answered

Marked out of 1.00

Flag question

If the mean < median the data is

- ☐ a. correlated

☒ b. negatively skewed

☐ c. symmetric

☐ d. positively skewed

Question 7

Not yet answered

Marked out of 1.00

Flag question

Which of the following are interestingness measures for association rules?

- ☐ a. Compactness

☐ b. accuracy

☐ c. Recall

☒ d. Lift

Question 8

Not yet answered

Marked out of 1.00

Flag question

Regression is a method of all the following except

- ☒ a. Integration

☐ b. Reduction

☐ c. Cleaning

☐ d. Transformation

Quiz navigation

1

2

3

4

5

6

7

8

9

10

Finish attempt ...

Question 9

Not yet
answered

Marked out of
1.00

Flag question

If all the proper subsets of an itemset are frequent, then the itemset itself.....

- ☒ a. may be frequent
- ☐ b. is strong
- ☐ c. must also be frequent
- ☐ d. must be infrequent

Question 10

Not yet
answered

Marked out of
1.00

Flag question

If an itemset is frequent, then all the proper subsets of it

- ☐ a. may be frequent
- ☐ b. must be infrequent
- ☒ c. must be frequent
- ☐ d. is strong

FINISH ATTEMPT ...

جميع الحقوق محفوظة © 2023 مركز تقنية الاتصالات والمعلومات -التعليم الإلكتروني - جامعة المنصورة

Data retention summary
Get the mobile app

Question 1

Not yet answered

Marked out of 1.00

Flag question

This data transformation technique works well when minimum and maximum values for a real-valued attribute are known.

- ☐ a. logarithmic normalization
- ☐ b. decimal scaling
- ☒ c. min-max normalization
- ☐ d. z-score normalization

Quiz navigation

1	2	3	4	5	6	7	8
9	10						

Finish attempt ...

Question 2

Not yet answered

Marked out of 1.00

Flag question

remove sub-trees from already constructed trees is a

- ☐ a. remove noise
- ☐ b. Pre-pruning
- ☐ c. remove outlier
- ☒ d. Post-pruning

Question 3

Not yet answered

Marked out of 1.00

Flag question

The correlation between the number of years an employee has worked for a company and the salary of the employee is 0.75. What can be said about employee salary and years worked?

- ☐ a. There is no relationship between salary and years worked.
- ☐ b. The majority of employees have been with the company a long time.
- ☐ c. Individuals that have worked for the company the longest have lower salaries.
- ☒ d. Individuals that have worked for the company the longest have higher salaries.

Question 4

Not yet answered

Marked out of 1.00

Flag question

If you want to give all attributes an equal weight, which pre-process task will you use.....

- ☐ a. Cleaning
- ☐ b. Integration
- ☒ c. Transformation
- ☐ d. Reduction

Question 5

Not yet answered

Marked out of 1.00

Flag question

This step of the KDD process model deals with noisy data.

- ☐ a. data transformation
- ☐ b. Creating a target dataset
- ☒ c. data preprocessing
- ☐ d. data mining

Question 6

Not yet answered

Marked out of 1.00

Flag question

What kind of attribute will you use to define the telephone number?

- ☒ a. Nominal.
- ☐ b. Discrete.
- ☐ c. Interval scaled.
- ☐ d. Ratio scaled.

Question 7

Not yet answered

Marked out of 1.00

Flag question

Regression is a method of integration

- ☒ a. FALSE
- ☐ b. TRUE

Question 8

Not yet answered

Marked out of 1.00

Flag question

In K-nearest neighbour algorithm K stands forwhile in K-means algorithm K stand for

- ☐ a. no. of rules, no. of classes
- ☐ b. no. of classes, no. of rules
- ☒ c. no. of neighbours, no. of cluster
- ☐ d. no. of cluster, no. of neighbours

Question 9Not yet
answeredMarked out of
1.00

Flag question

this approach is best when we are interested in finding all possible interactions among a set of attributes.

- ☐ a. K-Means algorithm
- ☒ b. association rules
- ☐ c. genetic learning
- ☐ d. decision tree

Question 10Not yet
answeredMarked out of
1.00

Flag question

If you need to make a prediction you will use

- ☐ a. DBSCAN
- ☐ b. FP-Growth
- ☒ c. K-nearest neighbour
- ☐ d. K- means

FINISH ATTEMPT ...

جميع الحقوق محفوظة © 2023 مركز تقنية الاتصالات والمعلومات -التعليم الإلكتروني - جامعة المنصورة

Data retention summary
Get the mobile app

Question 1
Not yet answered
Marked out of 1.00
[Flag question](#)

..... clustering algorithm initially select clusters' centers randomly.

- ☐ a. Divisive
- ☐ b. Conceptual
- ☒ c. K-Means
- ☐ d. Agglomerative

Question 2

Not yet answered

Marked out of 1.00

Flag question

Which of the following is the process of combining data from different resources?

- ☐ a. Data integration
- ☐ b. data selection
- ☐ c. data cleaning
- ☐ d. Data transformation

Question 3

Not yet answered

Marked out of 1.00

Flag question

..... clustering algorithm initially assumes that all data instance in a single large cluster.

- ☐ a. K-Means
- ☐ b. agglomerative
- ☐ c. conceptual
- ☒ d. Divisive

Question 4

Not yet answered

Marked out of 1.00

Flag question

If you use unsupervised algorithm, you will use

- ☐ a. FP-Growth
- ☐ b. K-nearest neighbor
- ☐ c. Decision Tree
- ☒ d. K- means

Question 5

Not yet answered

Marked out of 1.00

Flag question

Multimedia Mining is the application of data mining techniques to discover patterns from the Web

- ☐ a. TRUE
- ☒ b. FALSE

Question 6

Not yet answered

Marked out of 1.00

Flag question

If the mean > median the data is

- ☐ a. negatively skewed
- ☒ b. positively skewed
- ☐ c. symmetric
- ☐ d. correlated

Question 7

Not yet answered

Marked out of 1.00

Flag question

Database mining refers to the process of deriving high-quality information from text.

- ☐ a. TRUE
- ☒ b. FALSE

Question 8

Not yet answered

Marked out of 1.00

Flag question

Specificity is.....

- ☐ a. $TP+TN/P+N$
- ☐ b. TP/P
- ☒ c. TN/N
- ☐ d. $FP+FN/P+N$

Quiz navigation

1	2	3	4	5	6	7	8
9	10						

Finish attempt ...

Question 9

Not yet
answered

Marked out of
1.00

Flag question

The full form of KDD is

- ☐ a. Knowledge Data Definition
- ☒ b. Knowledge Discovery in Database
- ☐ c. Kind Data Distance
- ☐ d. Knowledge Database Design

Question 10

Not yet
answered

Marked out of
1.00

Flag question

The terminating conditions in decision tree include all the following except

- ☐ a. No remaining attributes
- ☐ b. All tuples belong to the same class
- ☐ c. No tuples for a given branch
- ☒ d. No Noise

FINISH ATTEMPT ...

Question 1

Not yet answered

Marked out of 1.00

Flag question

What classifiers are normally considered to be easy to interpret?

- ☐ a. Naïve Bayes
- ☐ b. k-Nearest Neighbour
- ☐ c. SVM
- ☒ d. Decision trees

Question 2

Not yet answered

Marked out of 1.00

Flag question

Which of the following is finally produced by Hierarchical Clustering?

- ☐ a. all of them
- ☐ b. assignment of each point to clusters
- ☒ c. tree showing how close things are to each other
- ☐ d. final estimate of cluster centroids

Question 3

Not yet answered

Marked out of 1.00

Flag question

Bootstrapping allows us to

- ☒ a. choose the same training instance several times.
- ☐ b. build models with alternative subsets of the training data several times.
- ☐ c. test a model with alternative subsets of the test data several times.
- ☐ d. choose the same test set instance several times.

Question 4

Not yet answered

Marked out of 1.00

Flag question

Correlation analysis is used to.....

- ☐ a. extract association rules
- ☐ b. define support and confidence values
- ☐ c. none of them
- ☒ d. eliminate misleading rules

Question 5

Not yet answered

Marked out of 1.00

Flag question

Point out the correct statement:

- ☐ a. None of them.
- ☐ b. k-nearest neighbour is same as k-means .
- ☐ c. k-means algorithm is used for classification.
- ☒ d. k-means algorithm aims to partition n objects into k sub-groups.

Question 6

Not yet answered

Marked out of 1.00

Flag question

Dissimilarity matrix stores n data objects that have p attributes as an n-by-p matrix

- ☐ a. TRUE
- ☒ b. FALSE

Question 7

Not yet answered

Marked out of 1.00

Flag question

The process of grouping a set of objects into classes of similar objects is called

- ☐ a. Association
- ☐ b. all of them
- ☐ c. classification
- ☒ d. clustering

Question 8

Not yet answered

Marked out of 1.00

Flag question

The Pruning make the decision tree more.....

- ☐ a. accuracy
- ☐ b. complex
- ☐ c. correlated
- ☒ d. simple

Quiz navigation

1	2	3	4	5	6	7	8
9	10						

Finish attempt ...

Question 9

Not yet
answered

Marked out of
1.00

Flag question

If the lift measure of the items bred and rice is equal to 0.5 this means bred and rice are ...

- ☐ a. uncorrelated
- ☐ b. independent
- ☒ c. negative correlated
- ☐ d. positive correlated

Question 10

Not yet
answered

Marked out of
1.00

Flag question

The bottleneck of the Apriori algorithm is caused by the number of association rules

- ☒ a. FALSE
- ☐ b. TRUE

FINISH ATTEMPT ...

Question 1

Not yet answered

Marked out of 1.00

[Flag question](#)

If the object deviates significantly from the rest of the dataset, it will be.....

- ☐ a. collective outlier
- ☐ b. contextual outlier
- ☐ c. local outlier
- ☒ d. global outlier

Question 2

Not yet answered

Marked out of 1.00

[Flag question](#)

Parametric data reduction strategies include

- ☐ a. Clustering
- ☐ b. Histograms
- ☐ c. Sampling
- ☒ d. Regression

Question 3

Not yet answered

Marked out of 1.00

[Flag question](#)

If the value of the lift measure of A and C =1.5 then the item A and C are

- ☐ a. negative correlated
- ☒ b. positive correlated
- ☐ c. independent
- ☐ d. frequent

Question 4

Not yet answered

Marked out of 1.00

[Flag question](#)

If the lift measure of the items bred and rice is equal to 1.5 this means bred and rice are ...

- ☐ a. uncorrelated
- ☐ b. independent
- ☐ c. negative correlated
- ☒ d. positive correlated

Question 5

Not yet answered

Marked out of 1.00

[Flag question](#)A core point in DBSCAN is an Object whose ϵ -neighborhood contains objects

- ☐ a. Null
- ☒ b. at least MinPts
- ☐ c. MinPts
- ☐ d. at most MinPts

Question 6

Not yet answered

Marked out of 1.00

[Flag question](#)

If the data observations tend to be very close to the mean, this means that the data has

- ☒ a. Low SD
- ☐ b. High SD
- ☐ c. Positively skewed
- ☐ d. Negatively skewed

Question 7

Not yet answered

Marked out of 1.00

[Flag question](#)

if the value of chi-square test > tabler value this means the two are

- ☐ a. uncorrelated
- ☒ b. positive correlated
- ☐ c. negative correlated
- ☐ d. independent

Question 8

Not yet answered

Marked out of 1.00

[Flag question](#)

Dissimilarity matrix stores a collection of proximities for all pairs of n objects as an n-by-n matrix

- ☒ a. TRUE
- ☐ b. FALSE

Quiz navigation

1	2	3	4	5	6	7	8
9	10						

Finish attempt ...

Question 9

Not yet
answered

Marked out of
1.00

Flag question

Data used to evaluate a data mining model is

- ☐ a. training data
- ☒ b. test data
- ☐ c. hidden data
- ☐ d. dirty data

Question 10

Not yet
answered

Marked out of
1.00

Flag question

K-Nearest Neighbour Classifiers do classification when new test data is available

- ☒ a. TRUE
- ☐ b. FALSE

FINISH ATTEMPT ...

جميع الحقوق محفوظة © 2023 مركز تقنية الاتصالات والمعلومات -التعليم الإلكتروني - جامعة المنصورة

Data retention summary
Get the mobile app

Question 1

Not yet answered

Marked out of 1.00

[Flag question](#)

If the data observations tend to be very close to the mean, this means that the data has

- ☐ a. High SD
- ☒ b. Low SD
- ☐ c. Positively skewed
- ☐ d. Negatively skewed

Question 2

Not yet answered

Marked out of 1.00

[Flag question](#)

If the object deviates significantly from the rest of the dataset, it will be.....

- ☐ a. collective outlier
- ☒ b. global outlier
- ☐ c. contextual outlier
- ☐ d. local outlier

Question 3

Not yet answered

Marked out of 1.00

[Flag question](#)

If the object deviates significantly from the rest of the dataset, it will be.....

- ☐ a. local outlier
- ☐ b. contextual outlier
- ☒ c. global outlier
- ☐ d. collective outlier

Question 4

Not yet answered

Marked out of 1.00

[Flag question](#)

Which of the following clustering has Fast processing time?

- ☐ a. Density-based
- ☐ b. Partitional
- ☐ c. Hierarchical
- ☒ d. Grid-based

Question 5

Not yet answered

Marked out of 1.00

[Flag question](#)

..... Is a subset of objects collectively deviates significantly from the dataset.

- ☐ a. contextual outlier
- ☐ b. global outlier
- ☒ c. collective outlier
- ☐ d. local outlier

Question 6

Not yet answered

Marked out of 1.00

[Flag question](#)

What classifiers are normally considered to be easy to interpret?

- ☐ a. Naïve Bayes
- ☐ b. SVM
- ☐ c. k-Nearest Neighbour
- ☒ d. Decision trees

Question 7

Not yet answered

Marked out of 1.00

[Flag question](#)

Redundancy is an important issue in data cleaning

- ☒ a. FALSE
- ☐ b. TRUE

Question 8

Not yet answered

Marked out of 1.00

[Flag question](#)

k-nearest neighbour is same as k-means

- ☐ a. TRUE
- ☒ b. FALSE

Quiz navigation

1	2	3	4	5	6	7	8
9	10						

Finish attempt ...

Question 9

Not yet
answered

Marked out of
1.00

Flag question

The probability that two items are bought together is known as _____ .

- ☐ a. confidence
- ☐ b. lift
- ☒ c. support
- ☐ d. Correlation

Question 10

Not yet
answered

Marked out of
1.00

Flag question

If the lift measure of the items bread and rice is equal to 1.5 this means bread and rice are ...

- ☐ a. independent
- ☐ b. uncorrelated
- ☐ c. negative correlated
- ☒ d. positive correlated

FINISH ATTEMPT ...

Question 1

Not yet answered

Marked out of 1.00

Flag question

Clustering algorithm which can find clusters of spherical shape are

- ☐ a. DBSCAN
- ☐ b. KNN
- ☐ c. Agglomerative
- ☒ d. K-mean

Question 2

Not yet answered

Marked out of 1.00

Flag question

If you want to give all attributes an equal weight, which pre-process task will you use.....

- ☒ a. Transformation
- ☐ b. Integration
- ☐ c. Reduction
- ☐ d. Cleaning

Question 3

Not yet answered

Marked out of 1.00

Flag question

Data used to evaluate a data mining model is

- ☐ a. hidden data
- ☐ b. dirty data
- ☒ c. test data
- ☐ d. training data

Question 4

Not yet answered

Marked out of 1.00

Flag question

Data used to build a data mining model is

- ☐ a. validation data
- ☒ b. training data
- ☐ c. hidden data
- ☐ d. test data

Question 5

Not yet answered

Marked out of 1.00

Flag question

if K-mean finds Clusters with very different sizes and with concave shapes this mean.....

- ☐ a. it needs more time
- ☐ b. it find good clusters
- ☐ c. none of them
- ☒ d. it fails

Question 6

Not yet answered

Marked out of 1.00

Flag question

Strategies for data transformation include chi-square test

- ☐ a. TRUE
- ☒ b. FALSE

Question 7

Not yet answered

Marked out of 1.00

Flag question

Bootstrapping allows us to

- ☐ a. test a model with alternative subsets of the test data several times.
- ☐ b. choose the same test set instance several times.
- ☒ c. choose the same training instance several times.
- ☐ d. build models with alternative subsets of the training data several times.

Question 8

Not yet answered


Marked out of 1.00

Flag question

Point out the correct statement:

- ☒ a. k-means algorithm aims to partition n objects into k sub-groups.
- ☐ b. k-means algorithm is used for classification.
- ☐ c. k-nearest neighbour is same as k-means .
- ☐ d. None of them.

Quiz navigation

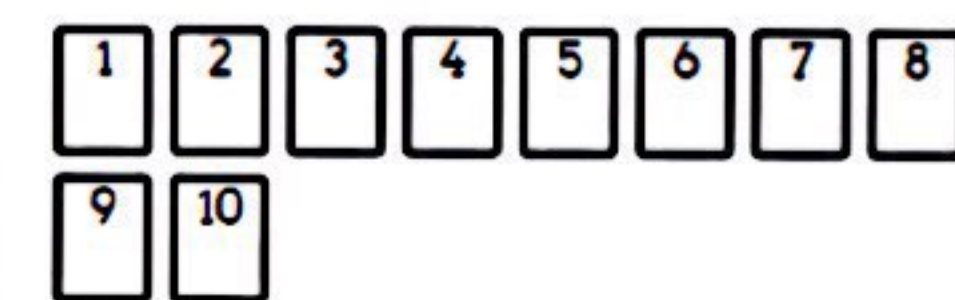

Finish attempt ...

Question 9

Not yet
answered

Marked out of
1.00

Flag question

All continuous variables are ratio

- ☐ a. TRUE
- ☒ b. FALSE

Question 10

Not yet
answered

Marked out of
1.00

Flag question

If you want to give all attributes an equal weight, which pre-process task will you use

- ☒ a. Transformation
- ☐ b. Reduction
- ☐ c. Integration
- ☐ d. Cleaning

FINISH ATTEMPT ...

جميع الحقوق محفوظة © 2023 مركز تقنية الاتصالات والمعلومات -التعليم الإلكتروني - جامعة المنصورة

Data retention summary
Get the mobile app

Question 1

Not yet
answeredMarked out of
1.00

Flag question

Which statement is true about the K-Means algorithm?

- ☒ a. All attributes must be numeric.
- ☐ b. The output attribute must be categorical.
- ☐ c. All attribute values must be categorical.
- ☐ d. Attribute values may be either categorical or numeric.

Question 2

Not yet
answeredMarked out of
1.00

Flag question

if the confidence of the rule < the min-confidence this means the rules is

- ☐ a. correlated
- ☒ b. not strong
- ☐ c. strong
- ☐ d. frequent

Question 3

Not yet
answeredMarked out of
1.00

Flag question

..... is the process of finding a model that describes and distinguishes data classes.

- ☐ a. Data discrimination
- ☐ b. Data Characterization
- ☐ c. Data selection
- ☒ d. Data Classification

Question 4

Not yet
answeredMarked out of
1.00

Flag question

What kind of attribute will you use to define the Temperature values?

- ☐ a. Discrete.
- ☐ b. Ratio scaled.
- ☐ c. Nominal.
- ☒ d. Interval scaled.

Question 5

Not yet
answeredMarked out of
1.00

Flag question

For an association rule, if we move one item from the right-hand-side to the left-hand-side of the rule, then the confidence will never change.

- ☒ a. FALSE
- ☐ b. TRUE

Question 6

Not yet
answeredMarked out of
1.00

Flag question

What kind of attribute will you use to define the telephone number?

- ☐ a. Discrete.
- ☒ b. Nominal.
- ☐ c. Ratio scaled.
- ☐ d. Interval scaled.

Question 7

Not yet
answeredMarked out of
1.00

Flag question

..... is the result of a tuple firing more than one rule with different class predictions.

- ☐ a. Interested rule
- ☐ b. Association rule
- ☒ c. Rule conflict
- ☐ d. Strong rule

Question 8

Not yet
answeredMarked out of
1.00

Flag question

The correlation coefficient for two real-valued attributes is -0.85 . What does this value tell you?

- ☐ a. The attributes are not linearly related.
- ☐ b. As the value of one attribute increases the value of the second attribute also increases.
- ☐ c. The attributes show a curvilinear relationship.
- ☒ d. As the value of one attribute decreases the value of the second attribute increases.

Quiz navigation

1	2	3	4	5	6	7	8
9	10						

Finish attempt ...

Question 9

Not yet
answered

Marked out of
1.00

Flag question

Median is a value that occurs most frequently in the attribute values

- ☒ a. FALSE
- ☐ b. TRUE

Question 10

Not yet
answered

Marked out of
1.00

Flag question

This step of the KDD process model deals with noisy data.

- ☐ a. data transformation
- ☐ b. data mining
- ☐ c. Creating a target dataset
- ☒ d. data preprocessing

FINISH ATTEMPT ...

جميع الحقوق محفوظة © 2023 مركز تقنية الاتصالات والمعلومات -التعليم الإلكتروني - جامعة المنصورة

Data retention summary
Get the mobile app

Question 1

Not yet answered

Marked out of 1.00

Flag question

Computing the total sales of a company. Is a data mining task?

- ☐ a. TRUE
- ☒ b. FALSE

Question 2

Not yet answered

Marked out of 1.00

Flag question

Which statement about outliers is true?

- ☒ a. The nature of the problem determines how outliers are used.
- ☐ b. It should be part of the training dataset but should not be present in the test data.
- ☐ c. It should be identified and removed from a dataset.
- ☐ d. It should be part of the test dataset but should not be present in the training data.

Question 3

Not yet answered

Marked out of 1.00

Flag question

This technique uses mean and standard deviation scores to transform real-valued attributes.

- ☐ a. decimal scaling
- ☐ b. min-max normalization
- ☐ c. logarithmic normalization
- ☒ d. z-score normalization

Question 4

Not yet answered

Marked out of 1.00

Flag question

If all the proper subsets of an itemset are frequent, then the itemset itself.....

- ☐ a. is strong
- ☐ b. must also be frequent
- ☐ c. must be infrequent
- ☒ d. may be frequent

Question 5

Not yet answered

Marked out of 1.00

Flag question

In decision tree algorithms, attribute selection measures are used to rank attributes

- ☐ a. FALSE
- ☒ b. TRUE

Question 6

Not yet answered

Marked out of 1.00

Flag question

If the object deviates significantly from the rest of the dataset, it will be.....

- ☐ a. local outlier
- ☐ b. contextual outlier
- ☒ c. global outlier
- ☐ d. collective outlier

Question 7

Not yet answered

Marked out of 1.00

Flag question

If a person's height is measured in inches, then what kind of attribute will you use?

- ☐ a. Interval scaled.
- ☐ b. Nominal.
- ☒ c. Ratio scaled.
- ☐ d. Discrete.

Question 8

Not yet answered

Marked out of 1.00

Flag question

If the value of the lift=1 for item A and C, the item A and C are

- ☐ a. frequent
- ☒ b. independent
- ☐ c. negative correlated
- ☐ d. positive correlated

Quiz navigation

1	2	3	4	5	6	7	8
9	10						

Finish attempt ...

Question 9

Not yet
answered

Marked out of
1.00

Flag question

The K-Means algorithm terminates when.....

- ☒ a. the cluster centers for the current iteration are identical to the cluster centers for the previous iteration.
- ☐ b. the number of clusters formed for the current iteration is identical to the number of clusters formed in the previous iteration.
- ☐ c. the number of instances in each cluster for the current iteration is identical to the number of instances in each cluster of the previous iteration.
- ☐ d. a user-defined minimum value for the summation of squared error differences between instances and their corresponding cluster center is seen.

Question 10

Not yet
answered

Marked out of
1.00

Flag question

Outliers clusters

- ☐ a. do not belong to any
- ☒ b. all of them
- ☐ c. belong to sparse
- ☐ d. belong to small cluster

FINISH ATTEMPT ...

جميع الحقوق محفوظة © 2023 مركز تقنية الاتصالات والمعلومات -التعليم الإلكتروني - جامعة المنصورة

Data retention summary
Get the mobile app

Question 1

Not yet answered

Marked out of 1.00

[Flag question](#)

Which of the following are interestingness measures for association rules?

- ☐ a. accuracy
- ☐ b. Compactness
- ☒ c. Lift
- ☐ d. Recall

Question 2

Not yet answered

Marked out of 1.00

[Flag question](#)

To measure objects similarity for objects with nominal attributes, use Euclidean distance

- ☐ a. TRUE
- ☒ b. FALSE

Question 3

Not yet answered

Marked out of 1.00

[Flag question](#)

What does the term 'outlier' mean?

- ☐ a. A type of variable that cannot be quantified
- ☐ b. The arithmetic mean
- ☐ c. A score that is left out of the analysis because of missing data
- ☒ d. An extreme value at either end of a distribution

Question 4

Not yet answered

Marked out of 1.00

[Flag question](#)

Parametric data reduction strategies include

- ☐ a. Histograms
- ☐ b. Clustering
- ☐ c. Sampling
- ☒ d. Regression

Question 5

Not yet answered

Marked out of 1.00

[Flag question](#)

In K-nearest neighbour algorithm K stands forwhile in K-means algorithm K stand for

- ☐ a. no. of classes, no. of rules
- ☐ b. no. of cluster, no. of neighbors
- ☐ c. no. of rules, no. of classes
- ☒ d. no. of neighbors, no. of cluster

Question 6

Not yet answered

Marked out of 1.00

[Flag question](#)

Which of the following is finally produced by Hierarchical Clustering?

- ☐ a. final estimate of cluster centroids
- ☐ b. assignment of each point to clusters
- ☒ c. tree showing how close things are to each other
- ☐ d. all of them

Question 7

Not yet answered

Marked out of 1.00

[Flag question](#)

The full form of KDD is

- ☒ a. Knowledge Discovery in Database
- ☐ b. Knowledge Data Definition
- ☐ c. Knowledge Database Design
- ☐ d. Kind Data Distance

Question 8

Not yet answered

Marked out of 1.00

[Flag question](#)

Sampling methods smooth noisy data

- ☐ a. TRUE
- ☒ b. FALSE

Quiz navigation

1	2	3	4	5	6	7	8
9	10						

Finish attempt ...

Question 9

Not yet
answered

Marked out of
1.00

Flag question

if rule conflict occurs , you will choose the rule with

- ☐ a. None of them
- ☐ b. smallest antecedent
- ☒ c. Largest antecedent
- ☐ d. Both of them

Question 10

Not yet
answered

Marked out of
1.00

Flag question

Which of the following is required by K-means clustering?

- ☐ a. number of clusters
- ☐ b. initial guess as to cluster centroids
- ☐ c. defined distance metric
- ☒ d. all of them

FINISH ATTEMPT ...